



**FCC PART 15C  
TEST REPORT  
No.2012WLN0327**

for

**TCT Mobile Limited**

**HSUPA/HSDPA/UMTS dual band / GSM quad bands mobile phone**

**Type: GIN S**

**Market Name: one touch 918 S**

**With**

**FCC ID: RAD260**

**IC: 9238A-0008**

**Hardware Version: PIO**

**Software Version: SW31H\_AWS**

**Issued Date: 2012-03-20**



**DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02**

**FCC 2.948 Listed: No.733176**

**No. DGA-PL-114/01-02**

**IC O.A.T.S listed: No.6629A-1**

**Note:**The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China, 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304793 Email:welcme@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

## **CONTENTS**

<b>CONTENTS</b> .....	<b>2</b>
<b>1. TEST LABORATORY</b> .....	<b>5</b>
1.1. TESTING LOCATION .....	5
1.2. TESTING ENVIRONMENT .....	5
1.3. PROJECT DATA .....	5
1.4. SIGNATURE .....	5
<b>2. CLIENT INFORMATION</b> .....	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION.....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)</b> .....	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION .....	7
<b>4. REFERENCE DOCUMENTS</b> .....	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT</b> .....	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS</b> .....	<b>10</b>
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
<b>7. TEST EQUIPMENTS UTILIZED</b> .....	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS</b> .....	<b>12</b>
A.1. MEASUREMENT METHOD .....	12
A.2. MAXIMUM PEAK OUTPUT POWER .....	13
A.2.1. MAXIMUM PEAK OUTPUT POWER .....	13
A.3. PEAK POWER SPECTRAL DENSITY .....	15
FIG. 1 POWER SPECTRAL DENSITY (802.11B, CH 1) .....	16
FIG. 2 POWER SPECTRAL DENSITY (802.11B, CH 6) .....	16
FIG. 3 POWER SPECTRAL DENSITY (802.11B, CH 11) .....	17
FIG. 4 POWER SPECTRAL DENSITY (802.11G, CH 1) .....	17
FIG. 5 POWER SPECTRAL DENSITY (802.11G, CH 6) .....	18
FIG. 6 POWER SPECTRAL DENSITY (802.11G, CH 11) .....	18
FIG. 7 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1) .....	19
FIG. 8 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6) .....	19

FIG. 9	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11)	20
A.4.	OCCUPIED 6DB BANDWIDTH	21
FIG. 10	OCCUPIED 6DB BANDWIDTH (802.11B, CH 1)	22
FIG. 11	OCCUPIED 6DB BANDWIDTH (802.11B, CH 6)	22
FIG. 12	OCCUPIED 6DB BANDWIDTH (802.11B, CH 11)	23
FIG. 13	OCCUPIED 6DB BANDWIDTH (802.11G, CH 1)	23
FIG. 14	OCCUPIED 6DB BANDWIDTH (802.11G, CH 6)	24
FIG. 15	OCCUPIED 6DB BANDWIDTH (802.11G, CH 11)	24
FIG. 16	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 1)	25
FIG. 17	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 6)	25
FIG. 18	OCCUPIED 6DB BANDWIDTH (802.11N-20MHZ, CH 11)	26
A.5.	BAND EDGES COMPLIANCE	27
FIG. 19	BAND EDGES (802.11B, CH 1)	28
FIG. 20	BAND EDGES (802.11B, CH 11)	28
FIG. 21	BAND EDGES (802.11G, CH 1)	29
FIG. 22	BAND EDGES (802.11G, CH 11)	29
FIG. 23	BAND EDGES (802.11 N-20MHZ, CH 1)	30
FIG. 24	BAND EDGES (802.11 N-20MHZ, CH 11)	30
A.6.	TRANSMITTER SPURIOUS EMISSION	31
A.6.1	TRANSMITTER SPURIOUS EMISSION - CONDUCTED	31
FIG. 25	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	32
FIG. 26	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-26 GHZ)	33
FIG. 27	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	33
FIG. 28	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-26 GHZ)	34
FIG. 29	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	34
FIG. 30	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHZ-26 GHZ)	35
FIG. 31	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	35
FIG. 32	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHZ-26 GHZ)	36
FIG. 33	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	36
FIG. 34	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHZ-26 GHZ)	37
FIG. 35	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY)	37
FIG. 36	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHZ-26 GHZ)	38
FIG. 37	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH1, CENTER FREQUENCY)	38
FIG. 38	CONDUCTED SPURIOUS EMISSION (802.11 N-20MHZ, CH1, 30 MHZ-26 GHZ)	39
FIG. 39	CONDUCTED SPURIOUS EMISSION (802.11 N-20MHZ, CH6, CENTER FREQUENCY)	39
FIG. 40	CONDUCTED SPURIOUS EMISSION (802.11 N-20MHZ, CH6, 30 MHZ-26 GHZ)	40
FIG. 41	CONDUCTED SPURIOUS EMISSION (802.11 N-20MHZ, CH11, CENTER FREQUENCY)	40
FIG. 42	CONDUCTED SPURIOUS EMISSION (802.11 N-20MHZ, CH11, 30 MHZ-26 GHZ)	41
A.6.2	TRANSMITTER SPURIOUS EMISSION - RADIATED	42
FIG. 43	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH1, 2.38 GHZ - 245GHZ	48
FIG. 44	RADIATED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-1 GHZ)	48
FIG. 45	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHZ-4 GHZ)	49
FIG. 46	RADIATED SPURIOUS EMISSION (802.11B, CH1, 4 GHZ-18 GHZ)	49
FIG. 47	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-1 GHZ)	50

FIG. 48	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHZ-4 GHZ)	50
FIG. 49	RADIATED SPURIOUS EMISSION (802.11B, CH6, 4 GHZ-18 GHZ)	51
FIG. 50	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH11, 2.45 GHZ - 2.50GHZ	51
FIG. 51	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30 MHZ-1 GHZ)	52
FIG. 52	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHZ-4 GHZ)	52
FIG. 53	RADIATED SPURIOUS EMISSION (802.11B, CH11, 4 GHZ-18 GHZ)	53
FIG. 54	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH1, 2.38 GHZ - 2.45GHZ	53
FIG. 55	RADIATED SPURIOUS EMISSION (802.11G, CH1, 30 MHZ-1 GHZ)	54
FIG. 56	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHZ-4 GHZ)	54
FIG. 57	RADIATED SPURIOUS EMISSION (802.11G, CH1, 4 GHZ-18 GHZ)	55
FIG. 58	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHZ-1 GHZ)	55
FIG. 59	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHZ-4 GHZ)	56
FIG. 60	RADIATED SPURIOUS EMISSION (802.11G, CH6, 4 GHZ-18 GHZ)	56
FIG. 61	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH11, 2.45 GHZ - 2.50GHZ	57
FIG. 62	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30 MHZ-1 GHZ)	57
FIG. 63	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHZ-4 GHZ)	58
FIG. 64	RADIATED SPURIOUS EMISSION (802.11G, CH11, 4 GHZ-18 GHZ)	58
FIG. 65	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHZ, CH1, 2.38 GHZ - 2.45GHZ	59
FIG. 66	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 30 MHZ-1 GHZ)	59
FIG. 67	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 1 GHZ-4 GHZ)	60
FIG. 68	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 4 GHZ-18 GHZ)	60
FIG. 69	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 30 MHZ-1 GHZ)	61
FIG. 70	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 1 GHZ-4 GHZ)	61
FIG. 71	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 4 GHZ-18 GHZ)	62
FIG. 72	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHZ, CH11, 2.45 GHZ - 2.50GHZ	62
FIG. 73	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 30 MHZ-1 GHZ)	63
FIG. 74	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 1 GHZ-4 GHZ)	63
FIG. 75	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 4 GHZ-18 GHZ)	64
FIG. 76	RADIATED EMISSION: 18 GHZ - 26.5 GHZ	64
A.7.	AC POWERLINE CONDUCTED EMISSION	65
FIG. 77	AC POWERLINE CONDUCTED EMISSION-802.11N	66
FIG. 78	AC POWERLINE CONDUCTED EMISSION-IDLE	67
FIG. 79	AC POWERLINE CONDUCTED EMISSION-802.11N-20MHZ	68
A.8.	OCCUPIED 20DB BANDWIDTH	69
FIG. 80	OCCUPIED 6dB BANDWIDTH (802.11B, CH 1)	70
FIG. 81	OCCUPIED 6dB BANDWIDTH (802.11B, CH 6)	70
FIG. 82	OCCUPIED 6dB BANDWIDTH (802.11B, CH 11)	71
FIG. 83	OCCUPIED 6dB BANDWIDTH (802.11G, CH 1)	71
FIG. 84	OCCUPIED 6dB BANDWIDTH (802.11G, CH 6)	72
FIG. 85	OCCUPIED 6dB BANDWIDTH (802.11G, CH 11)	72
FIG. 86	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHZ, CH 1)	73
FIG. 87	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHZ, CH 6)	73
FIG. 88	OCCUPIED 6dB BANDWIDTH (802.11N-20MHZ, CH 11)	74

## 1. TEST LABORATORY

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793

### 1.2. Testing Environment


Normal Temperature: 15-30°C  
Extreme Temperature: -20/+55°C  
Relative Humidity: 30-60%  
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### 1.3. Project data

Testing End Date: 2012-03-19

### 1.4. Signature




---

**Sun Zhenyu**  
(Prepared this test report)



---

**Gao Hong**  
(Reviewed this test report)



---

**Lu Bingsong**  
Deputy Director of the laboratory  
(Approved this test report)

## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 518057  
Country: China  
Contact Gong Zhizhou  
Email zhizhou.gong @jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 518057  
Country: China  
Contact Gong Zhizhou  
Email zhizhou.gong @jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

#### EQUIPMENT(AE)

##### 3.1. About EUT

Description	HSUPA/HSDPA/UMTS dual band / GSM quad bands mobile phone
Type	GIN S
Market Name	one touch 918 S
FCC ID	RAD260
IC	9238A-0008
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	23.53dBm(CCK)
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report.

##### 3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	013122000000833	PIO	SW31H_AWS

\*EUT ID: is used to identify the test sample in the lab internally.

##### 3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	CAB31P0000C1	/
AE2	Battery	CAB31P0000C2	/
AE3	Travel Adapter	CBA3002AG0C1	/

\*AE ID: is used to identify the test sample in the lab internally.

##### 3.4. General Description

Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS dual band / GSM quad bands mobile phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## 4. REFERENCE DOCUMENTS

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2009 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	March 23, 2005



## 5. LABORATORY ENVIRONMENT

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing::

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Shielding Room2** (7.30 meters×4.00 meters×3.80 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (a)	A8.4	P
Peak Power Spectral Density	15.247 (d)	A8.2, A8.3	P
Occupied 6dB Bandwidth	15.247 (d)	A8.2	P
Band Edges Compliance	15.247 (b)	A8.5	P
Transmitter Spurious Emission - Conducted	15.247	A8.5	P
Transmitter Spurious Emission - Radiated	15.247, 15.209, 15.209	A8.5	P
AC Powerline Conducted Emission	15.107, 15.207	7.2.2	P
Occupied 20dB Bandwidth	15.247 (d)	A8.2	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

TMC has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

This model is a variant product of the model GIN A, which market name is one touch 918 A; only the test case of occupied 20dB bandwidth is performed, and the other test cases are not performed. The test result has been derived from test report of GIN A except occupied 20dB bandwidth.

Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	26°C
Voltage	V nom	3.6V(By battery)
Humidity	H nom	44%
Air Pressure	A nom	1010hPa

## **7. TEST EQUIPMENTS UTILIZED**

### **Conducted test system**

<b>No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration Due date</b>
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2012-07-19
2	Spectrum Analyzer	MS2687B	6200819812	Anritsu	2012-09-22
3	Test Receiver	ESS	847151/015	Rohde & Schwarz	2012-10-30
4	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2012-08-12

### **Radiated emission test system**

<b>No.</b>	<b>Equipment</b>	<b>Model</b>	<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration Due date</b>
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2012-08-11
2	BiLog Antenna	3142B	9908-1403	EMCO	2013-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2012-12-25

### **Anechoic chamber**


Anechoic chamber by Frankonia German.

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

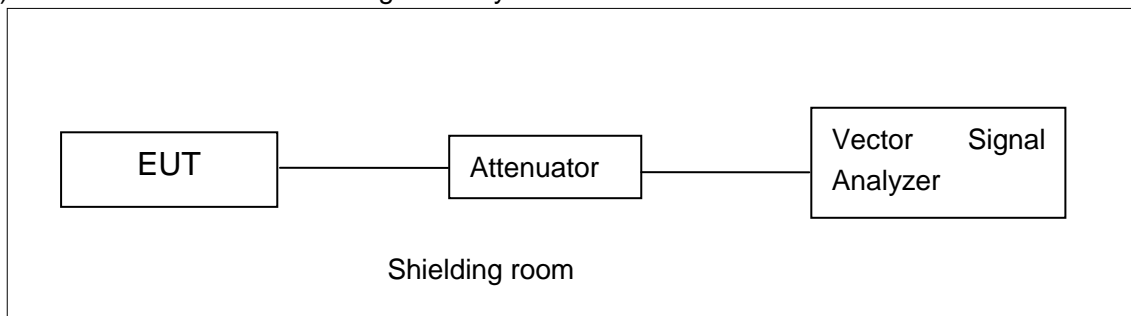


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

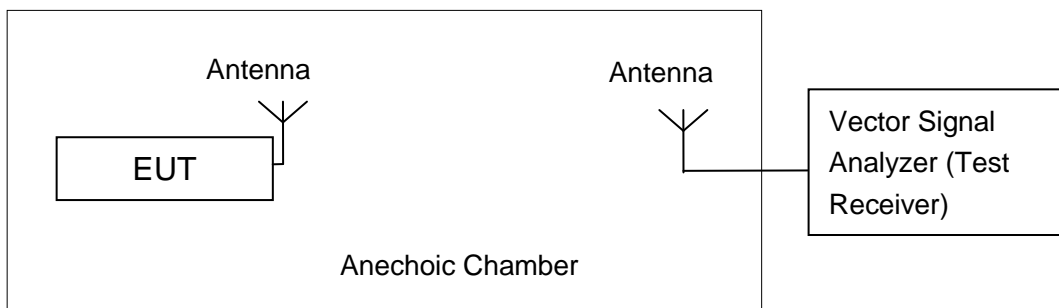

The measurement is made according to ANSI C63.4 and KDB558074

## A.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b) A8.4	< 30

The measurement is made according to ANSI C63.4 and KDB558074, and power output option 1 (RBW=20MHz) in KDB558074 is used for the test. EUT is operating in continuous transmitting mode

### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### A.2.1. Maximum Peak Output Power

#### Measurement Results:

#### 802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.41	/	/
	2	20.61	/	/
	5.5	22.66	/	/
	11	23.49	23.24	23.53
802.11g	6	22.04	/	/
	9	22.04	/	/
	12	21.72	/	/
	18	21.68	/	/
	24	22.42	22.35	22.32
	36	22.23	/	/
	48	22.21	/	/
	54	22.32	/	/

The data rate 11Mbps and 24Mbps are selected as worse condition, and the following cases are performed with this condition.

#### 802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz BW)	MCS0	21.96	/	/
	MCS1	22.06	/	/
	MCS2	22.03	/	/
	MCS3	22.59	/	/
	MCS4	22.58	/	/

	MCS5	22.71	22.72	22.34
	MCS6	22.68	/	/
	MCS7	22.68	/	/
802.11n (40MHz)	MCS0	/	/	/
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate index of MCS5 is selected as worse condition, and the following cases are performed with this condition.

**Conclusion: PASS**

### A.3. Peak Power Spectral Density

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(d) A8.2, A8.3	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

**Measurement Uncertainty:**

Measurement Uncertainty	0.75dB
-------------------------	--------

**Measurement Results:**

**802.11b/g mode**


Mode	Channel	Power Spectral Density ( 8 dBm/3 kHz )		Conclusion
802.11b	1	Fig.1	-7.97	P
	6	Fig.2	-7.77	P
	11	Fig.3	-7.95	P
802.11g	1	Fig.4	-10.31	P
	6	Fig.5	-10.67	P
	11	Fig.6	-10.85	P

**802.11n mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (20MHz)	1	Fig.7	-11.54	P
	6	Fig.8	-11.55	P
	11	Fig.9	-11.31	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/

**Conclusion: PASS**

**Test graphs as below:**

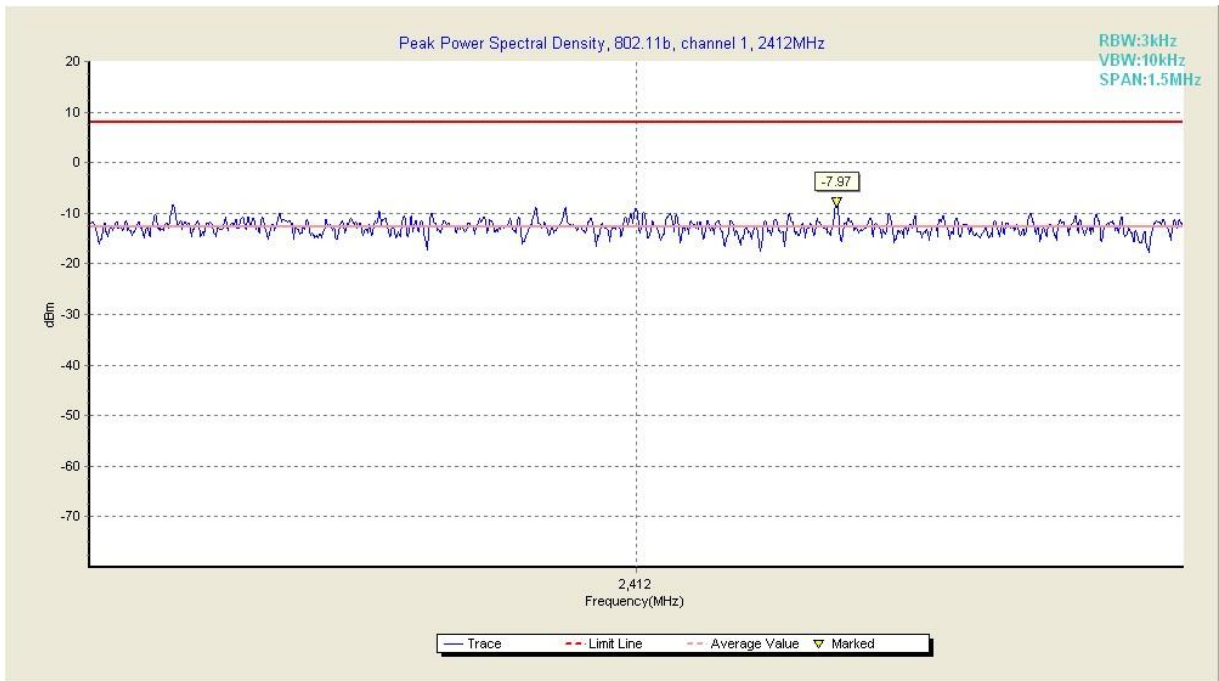


**Fig. 1 Power Spectral Density (802.11b, Ch 1)**

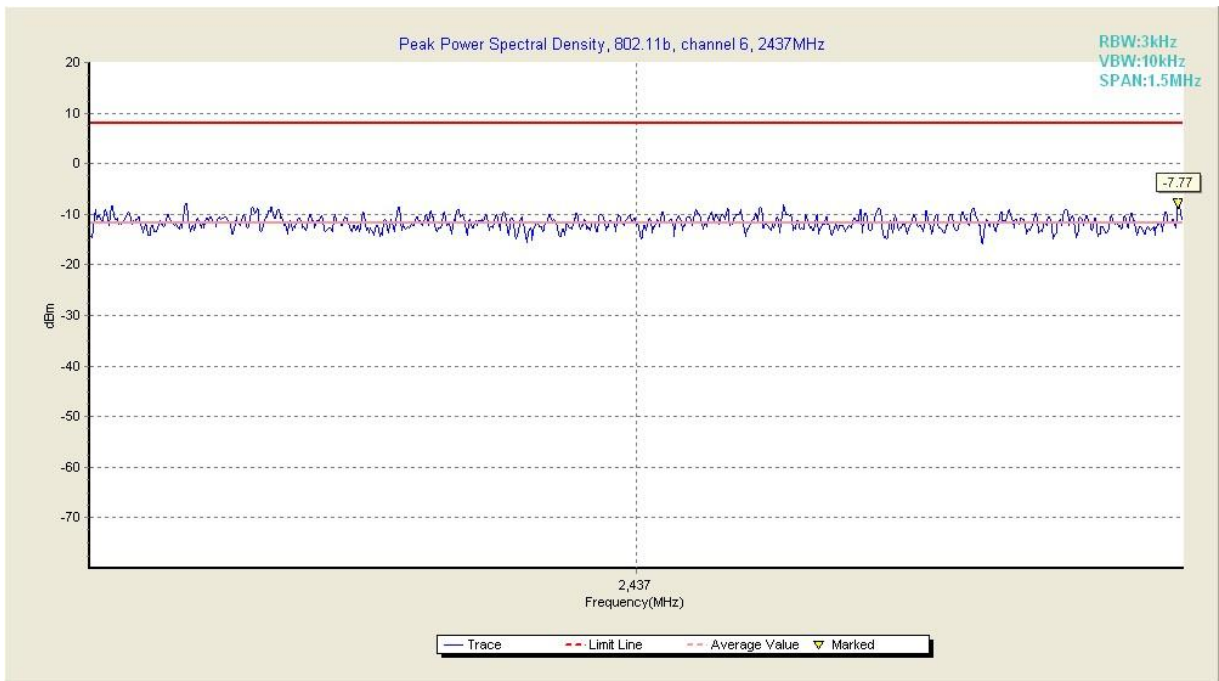


**Fig. 2 Power Spectral Density (802.11b, Ch 6)**




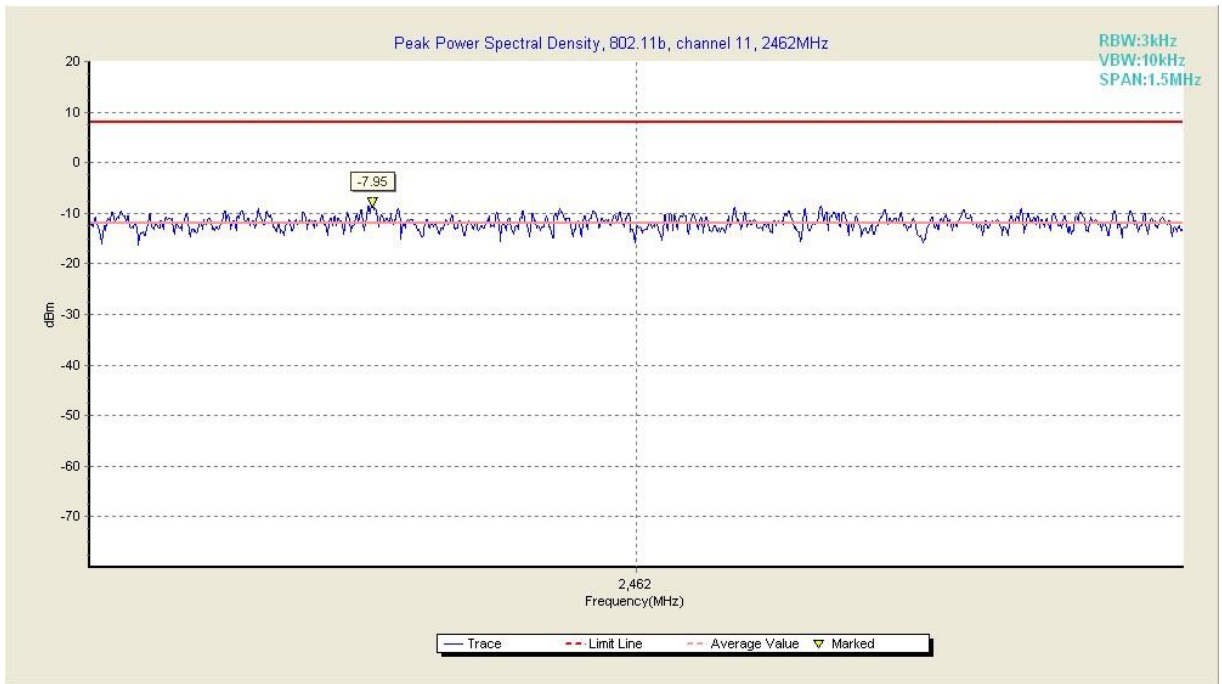


**Fig. 3 Power Spectral Density (802.11b, Ch 11)**

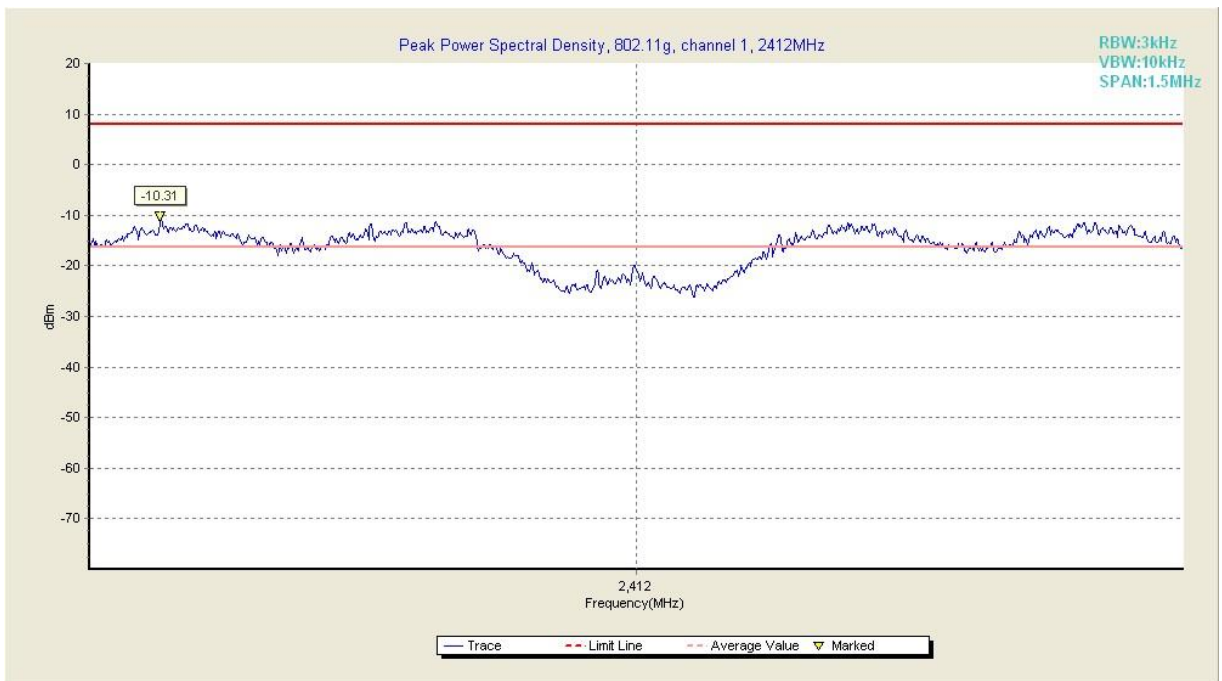


**Fig. 4 Power Spectral Density (802.11g, Ch 1)**

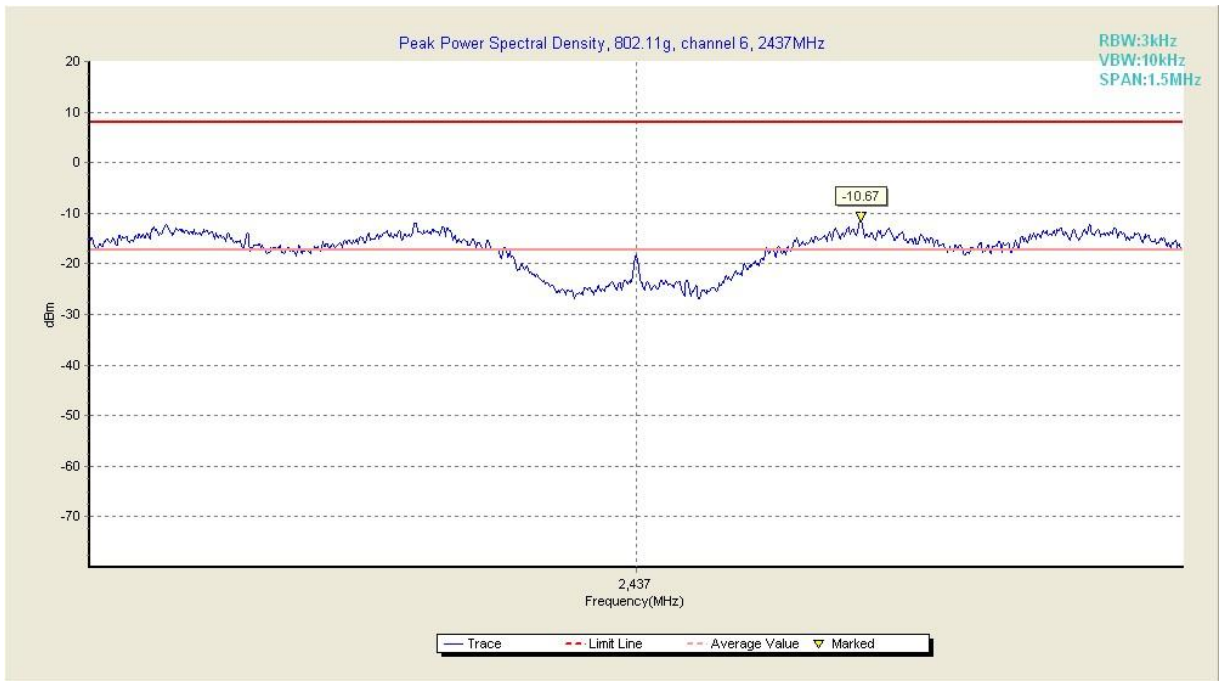


**Fig. 5 Power Spectral Density (802.11g, Ch 6)**

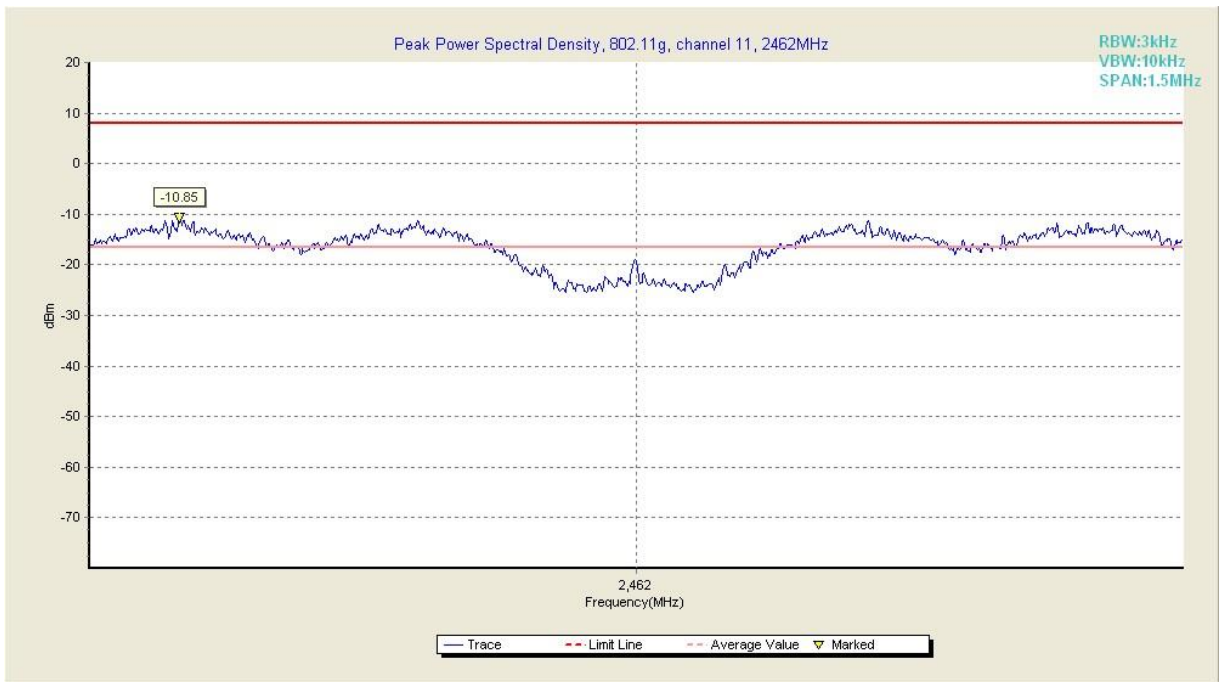


**Fig. 6 Power Spectral Density (802.11g, Ch 11)**

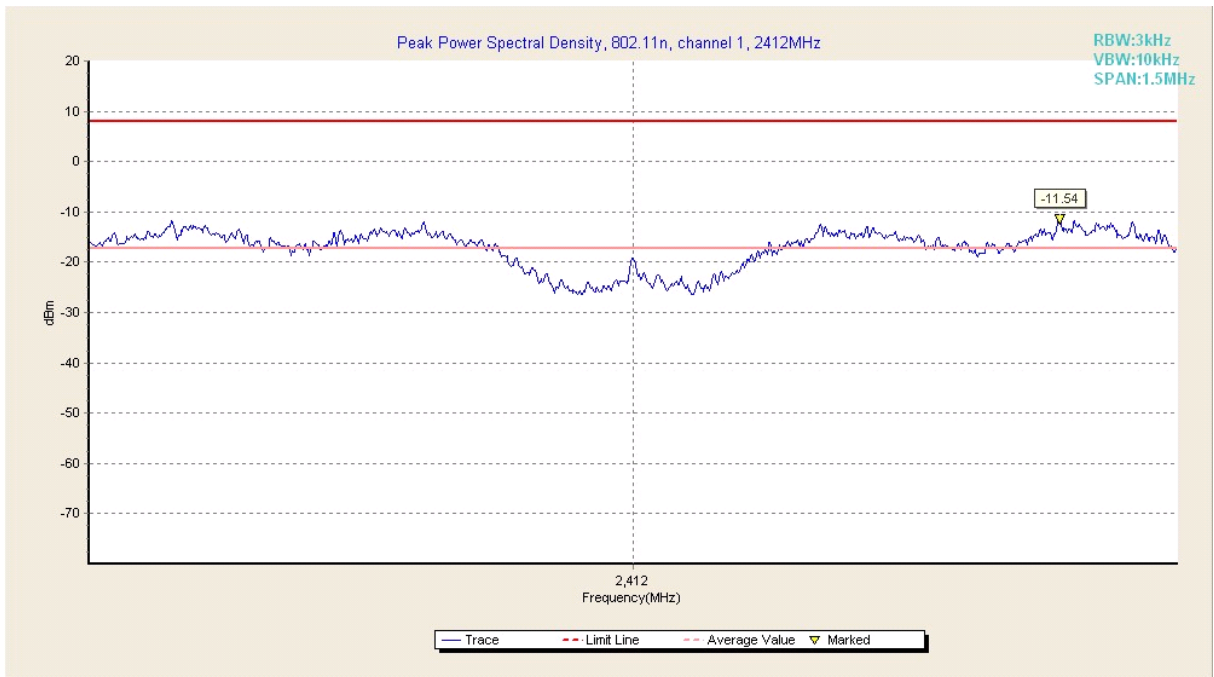

**Fig. 7 Power Spectral Density (802.11n-20MHz, Ch 1)**

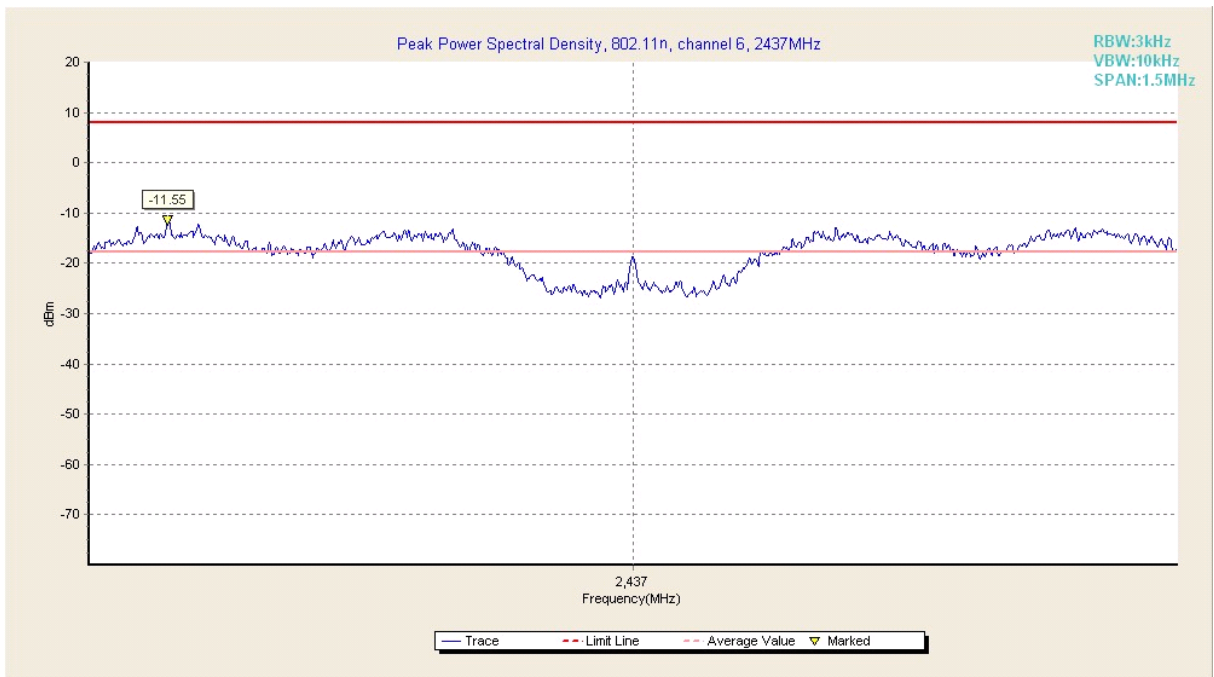

**Fig. 8 Power Spectral Density (802.11n-20MHz, Ch 6)**

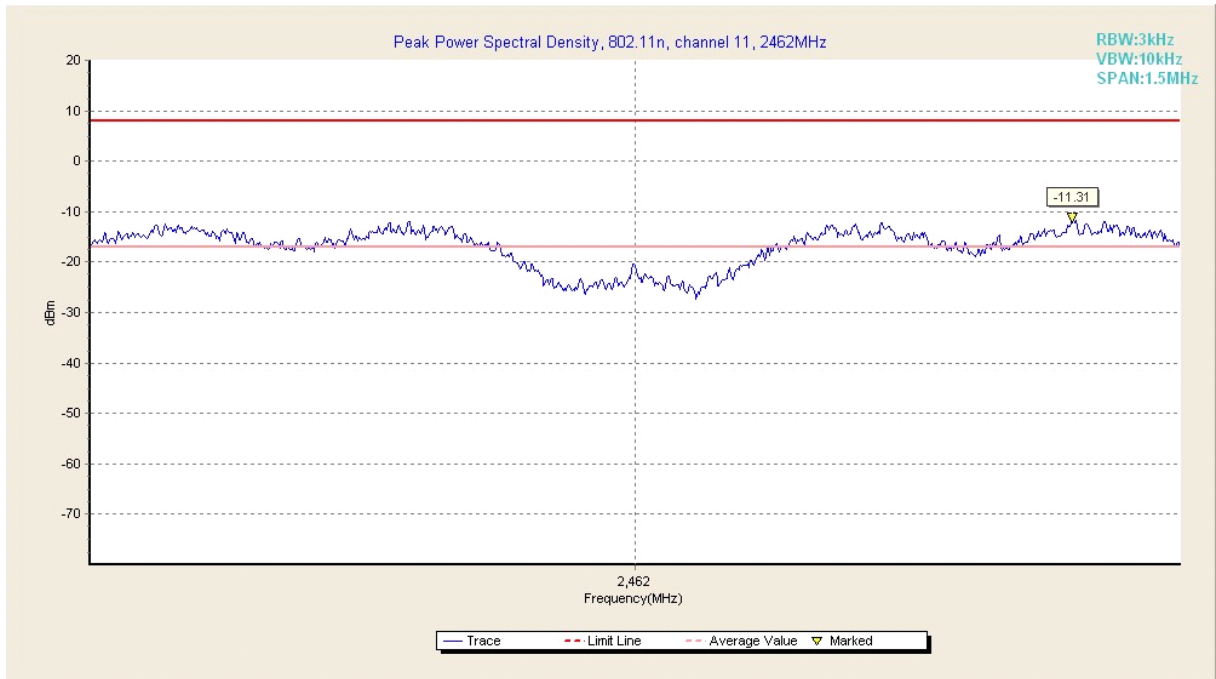

**Fig. 9 Power Spectral Density (802.11n-20MHz, Ch 11)**

#### A.4. Occupied 6dB Bandwidth

##### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) A8.2	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

##### Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

##### Measurement Result:

###### 802.11b/g mode


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.10	9560	P
	6	Fig.11	9300	P
	11	Fig.12	9450	P
802.11g	1	Fig.13	16600	P
	6	Fig.14	16600	P
	11	Fig.15	16600	P

###### 802.11n mode


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (20MHz)	1	Fig.16	17850	P
	6	Fig.17	17800	P
	11	Fig.18	17800	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/

**Conclusion: PASS**

Test graphs as below:

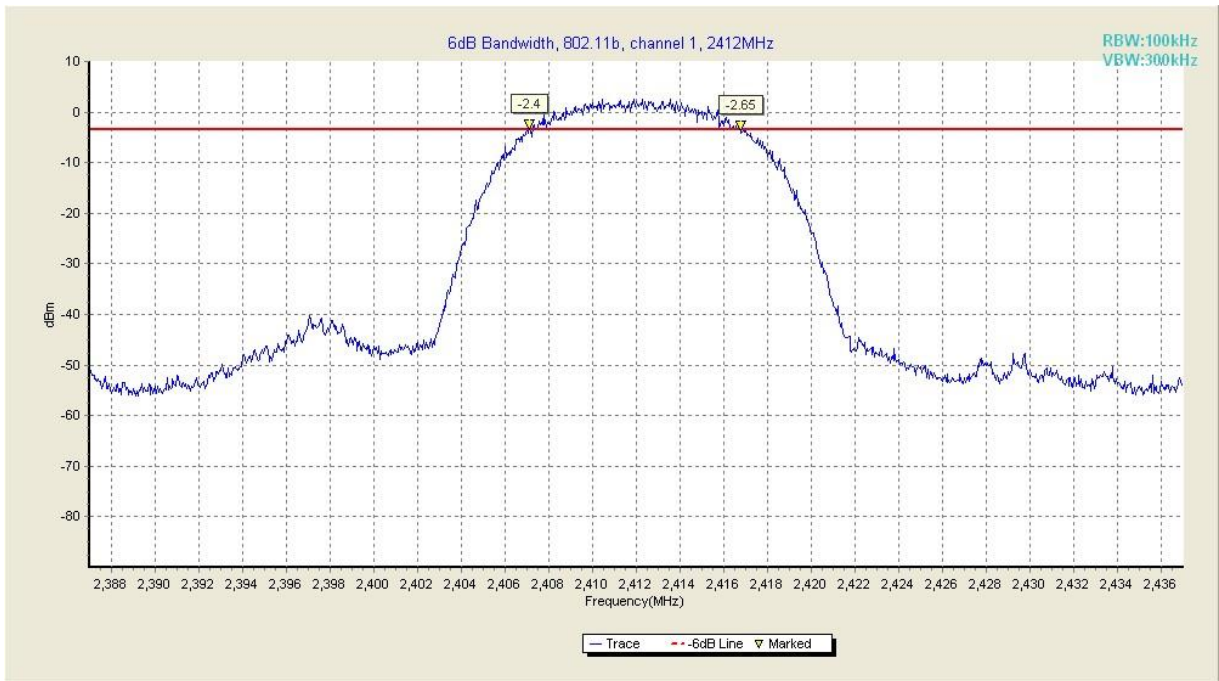

**Fig. 10 Occupied 6dB Bandwidth (802.11b, Ch 1)**

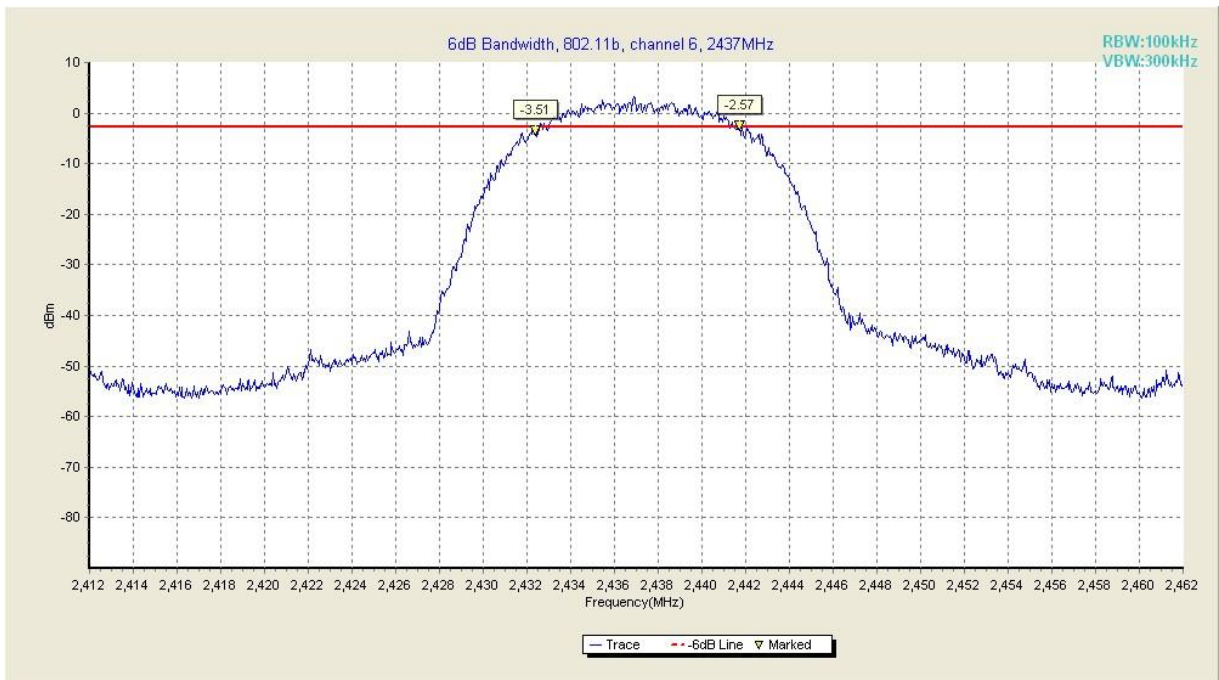

**Fig. 11 Occupied 6dB Bandwidth (802.11b, Ch 6)**

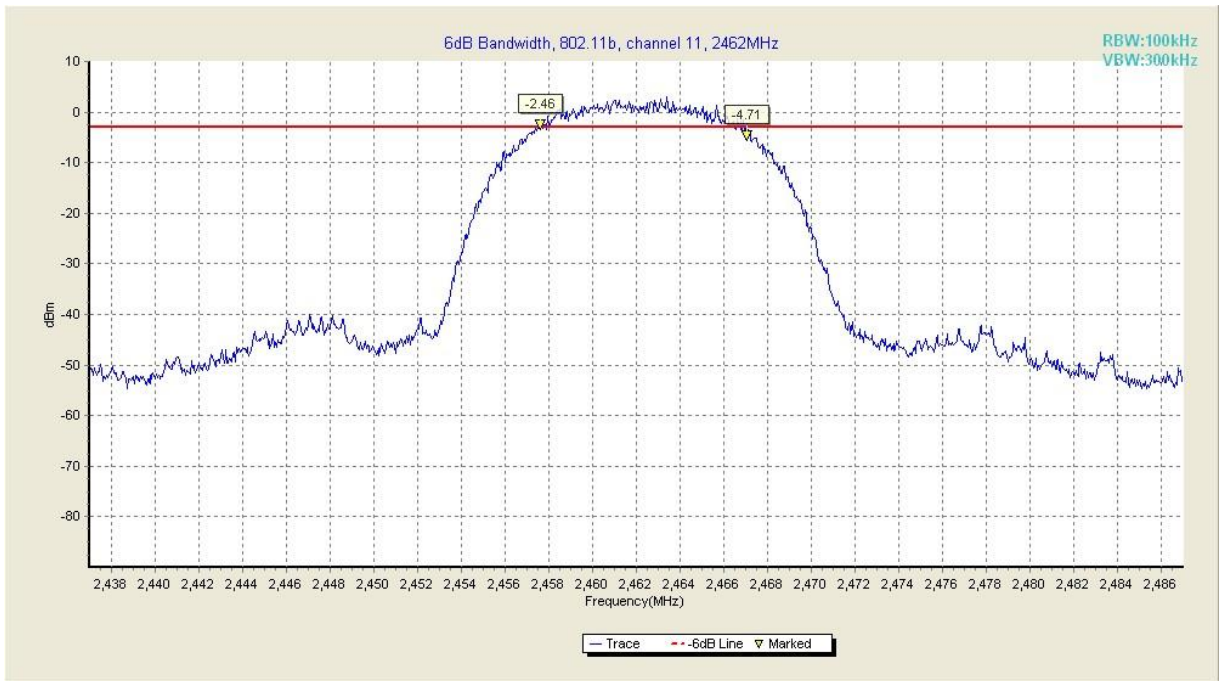


Fig. 12 Occupied 6dB Bandwidth (802.11b, Ch 11)



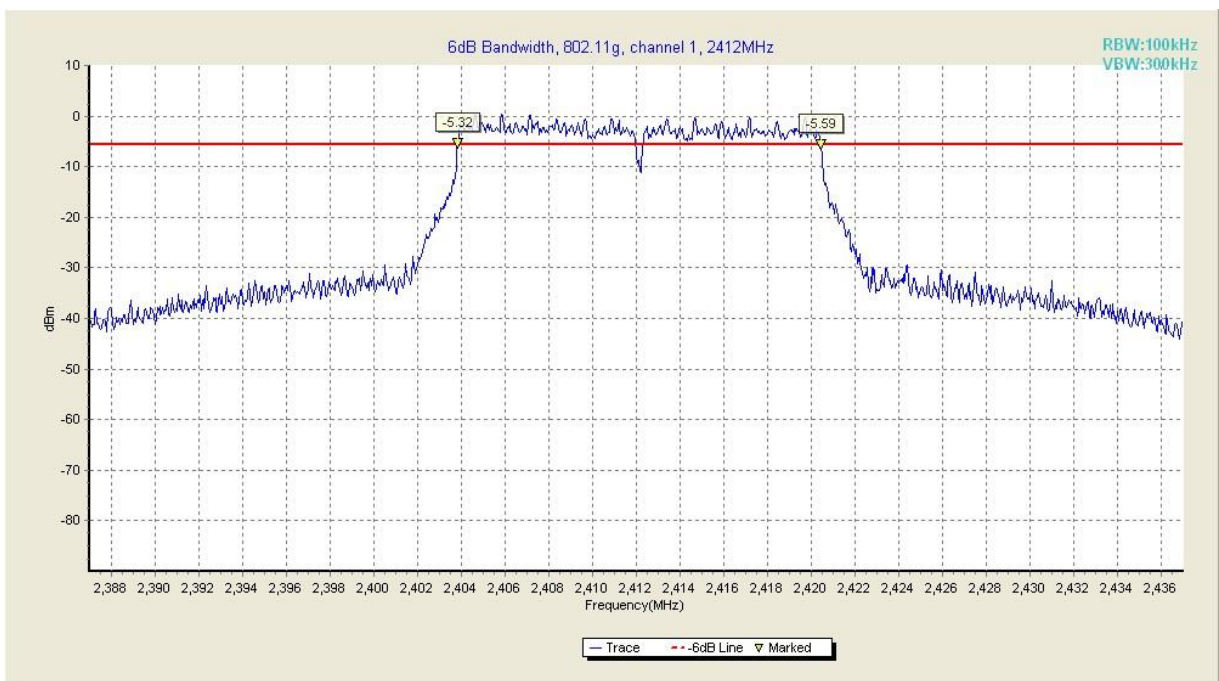


Fig. 13 Occupied 6dB Bandwidth (802.11g, Ch 1)

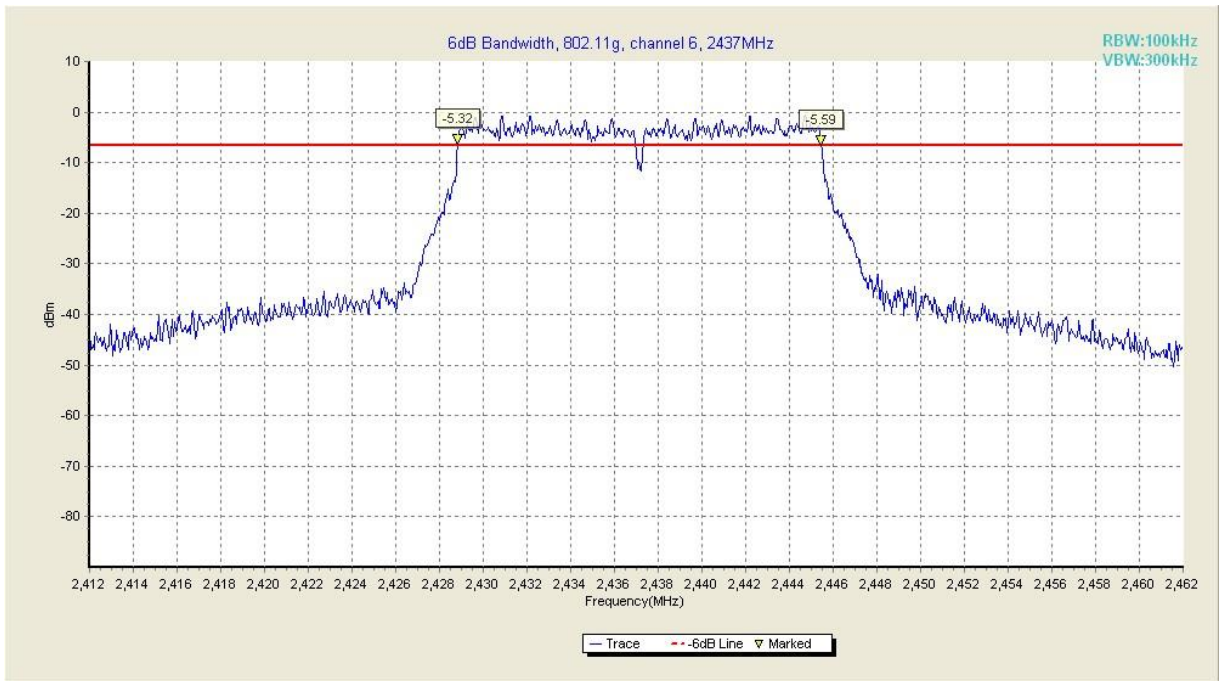

**Fig. 14 Occupied 6dB Bandwidth (802.11g, Ch 6)**

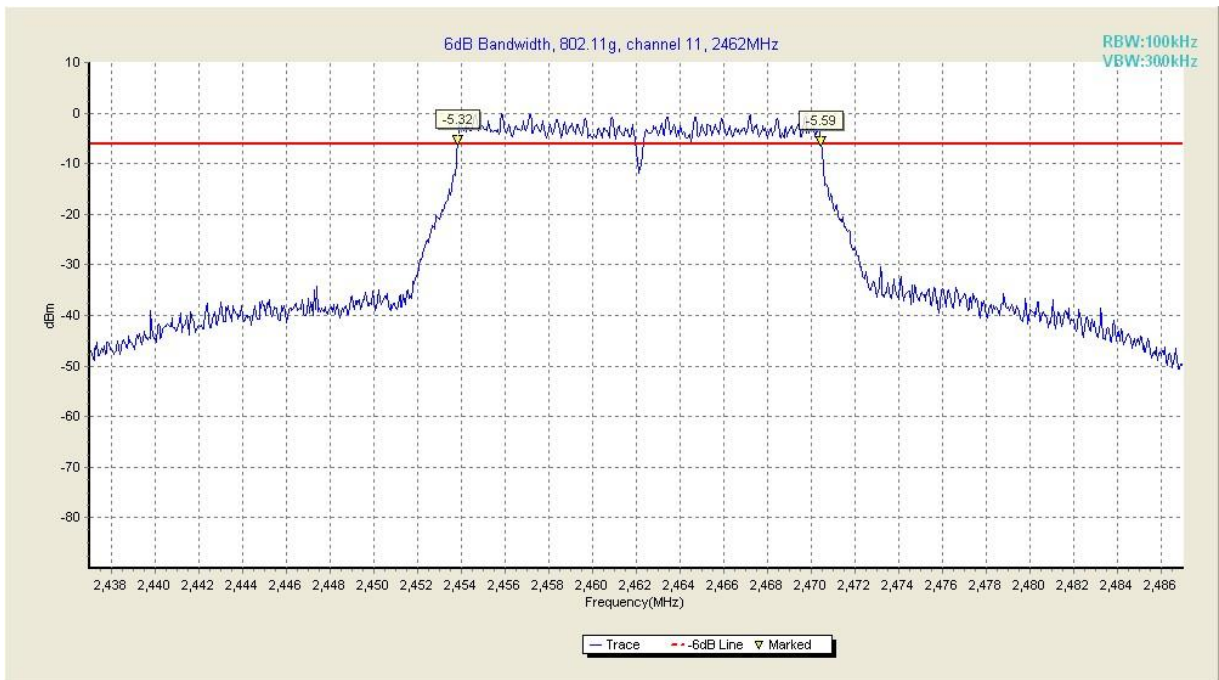

**Fig. 15 Occupied 6dB Bandwidth (802.11g, Ch 11)**



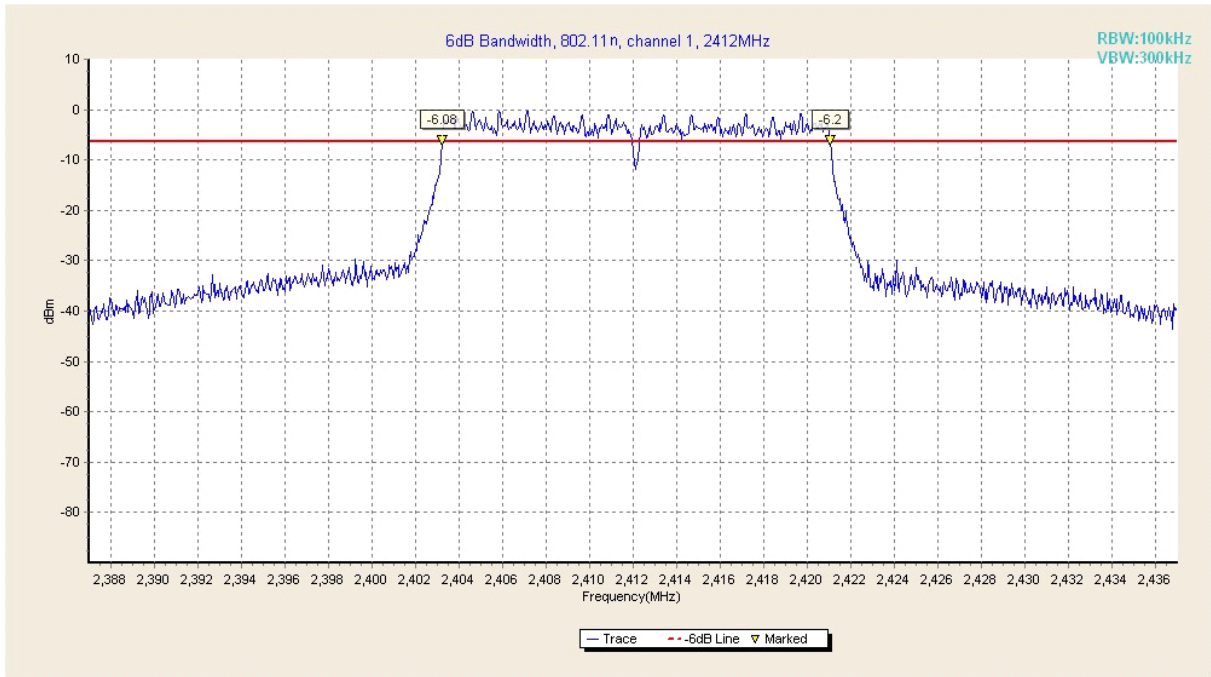


Fig. 16 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 1)

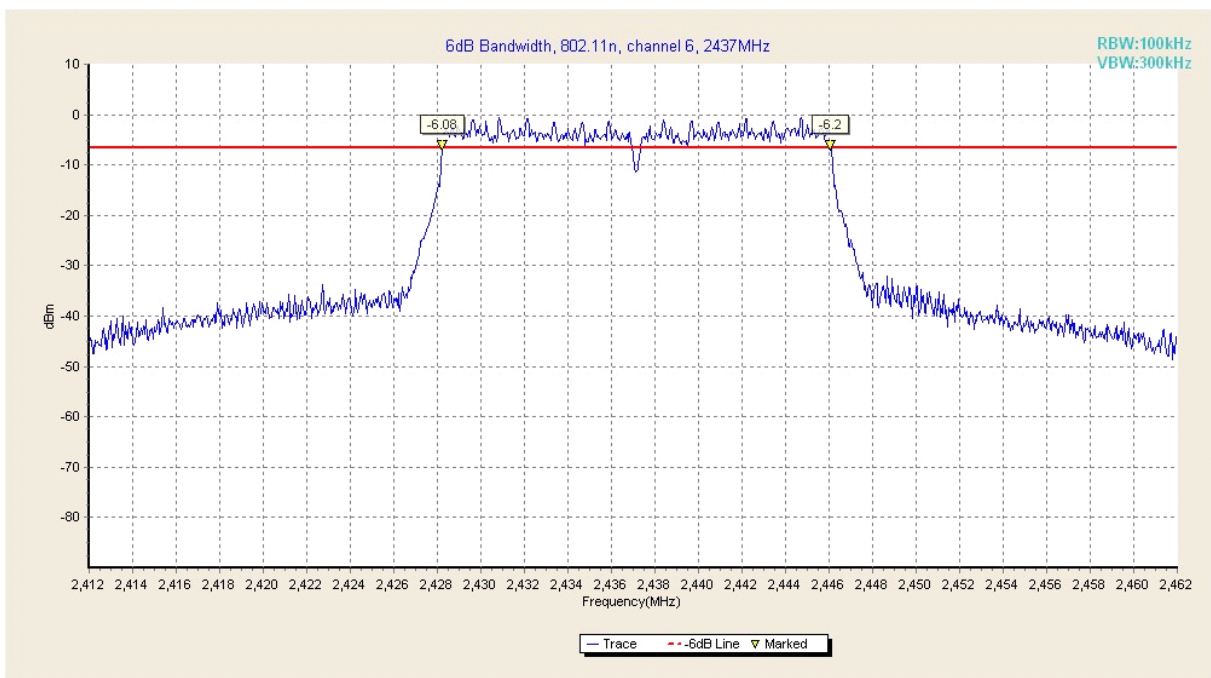


Fig. 17 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 6)

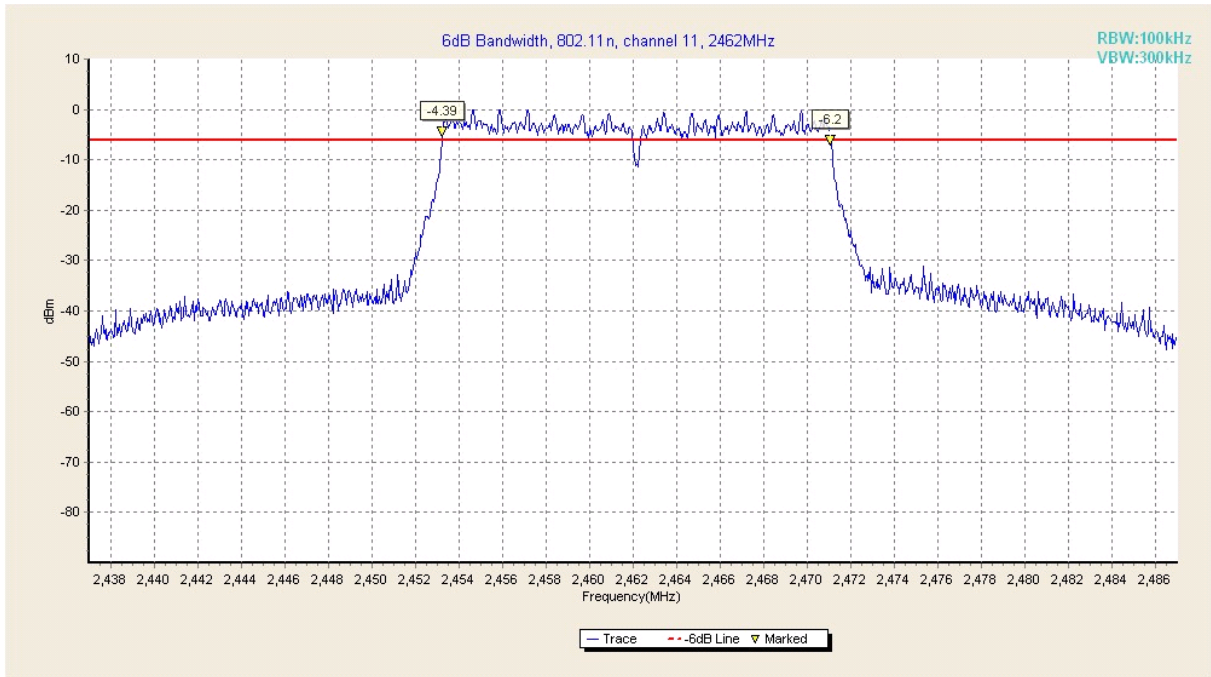


Fig. 18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)

### A.5. Band Edges Compliance

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) A8.5	> 20

The measurement is made according to ANSI C63.4 and KDB558074

**Measurement Uncertainty:**

Measurement Uncertainty	0.75dB
-------------------------	--------

**Measurement Result:**

**802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.19	P
	11	Fig.20	P
802.11g	1	Fig.21	P
	11	Fig.22	P

**802.11n mode**

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.23	P
	11	Fig.24	P
802.11n (40MHz)	/	/	/
	/	/	/

**Conclusion: PASS**

**Test graphs as below:**

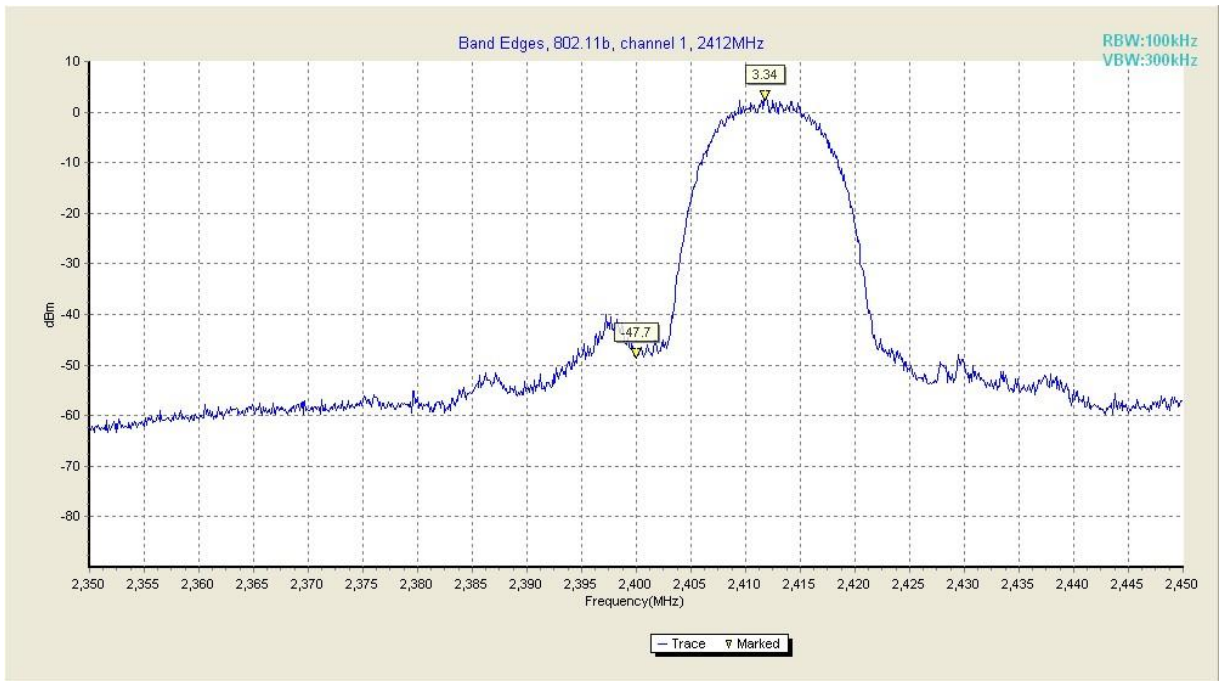


Fig. 19 Band Edges (802.11b, Ch 1)

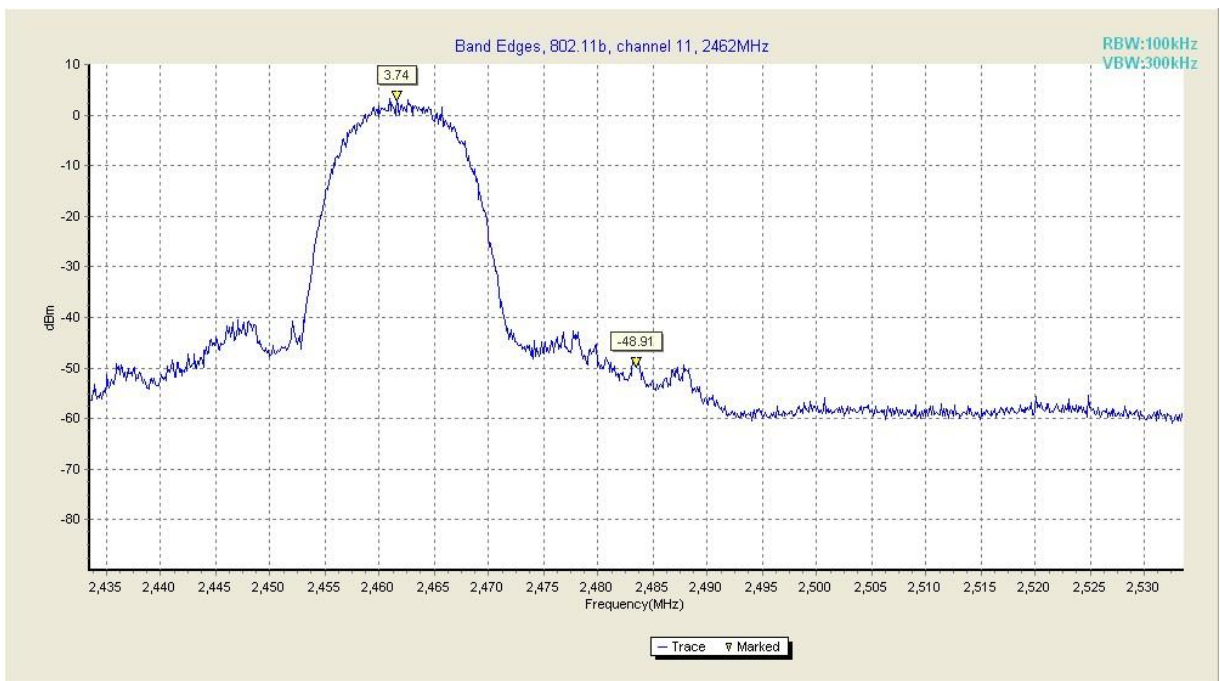


Fig. 20 Band Edges (802.11b, Ch 11)

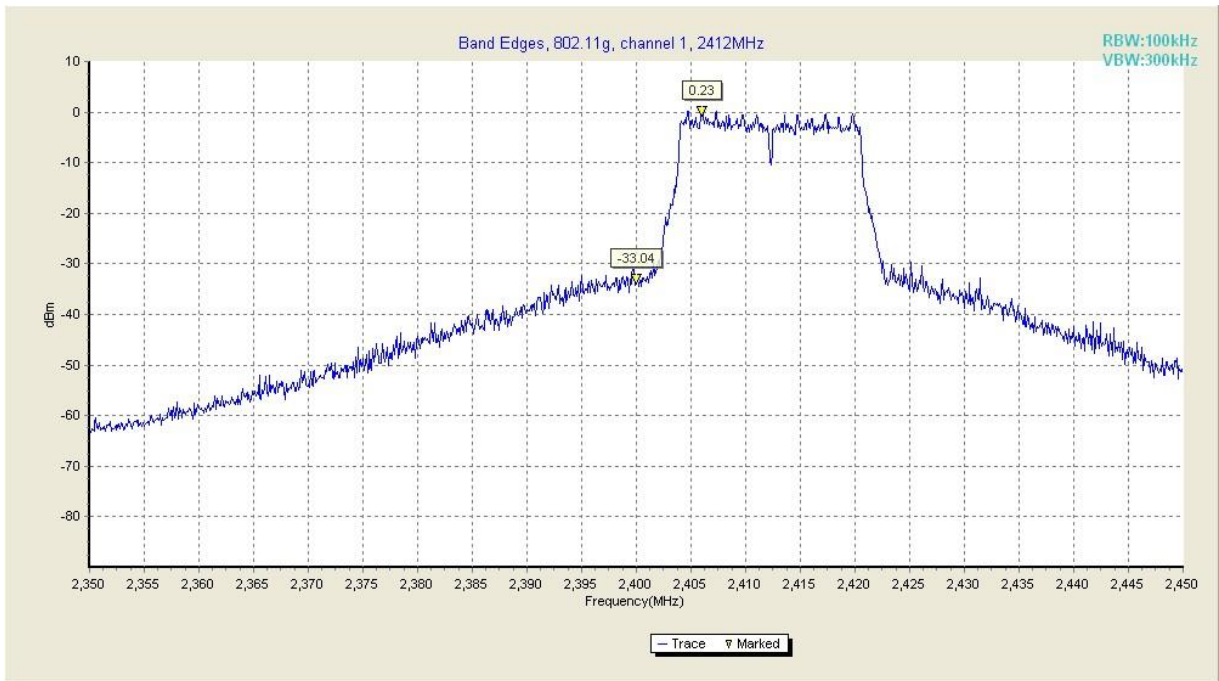


Fig. 21 Band Edges (802.11g, Ch 1)



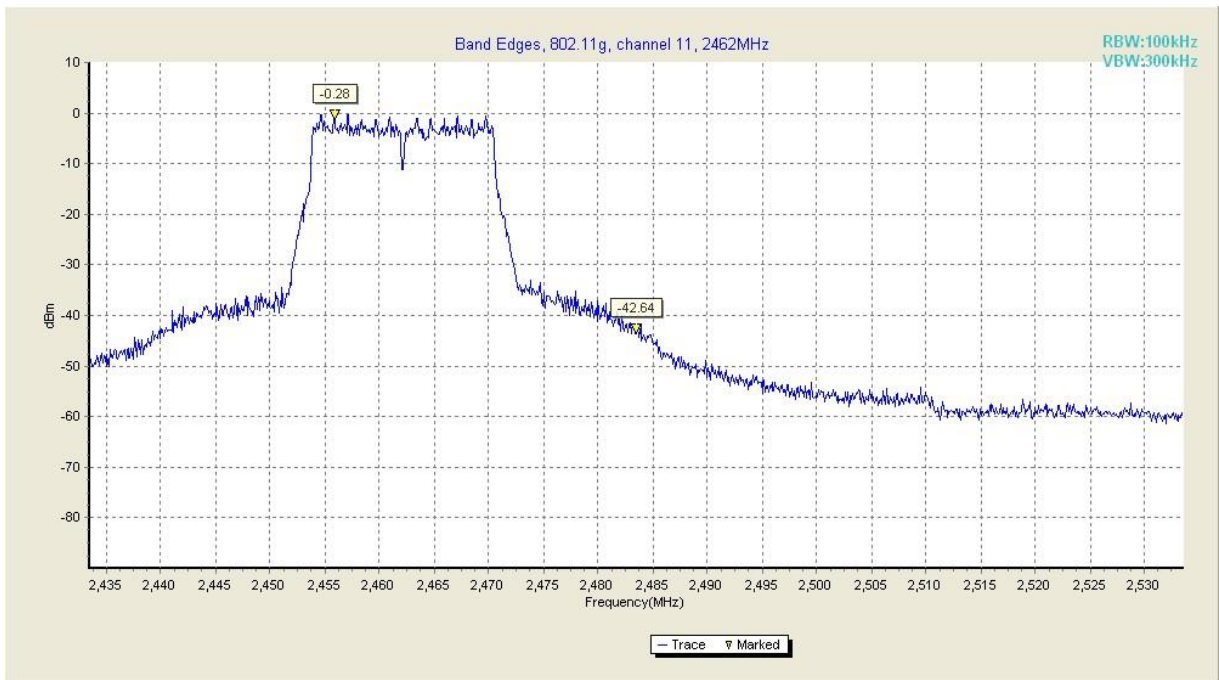


Fig. 22 Band Edges (802.11g, Ch 11)

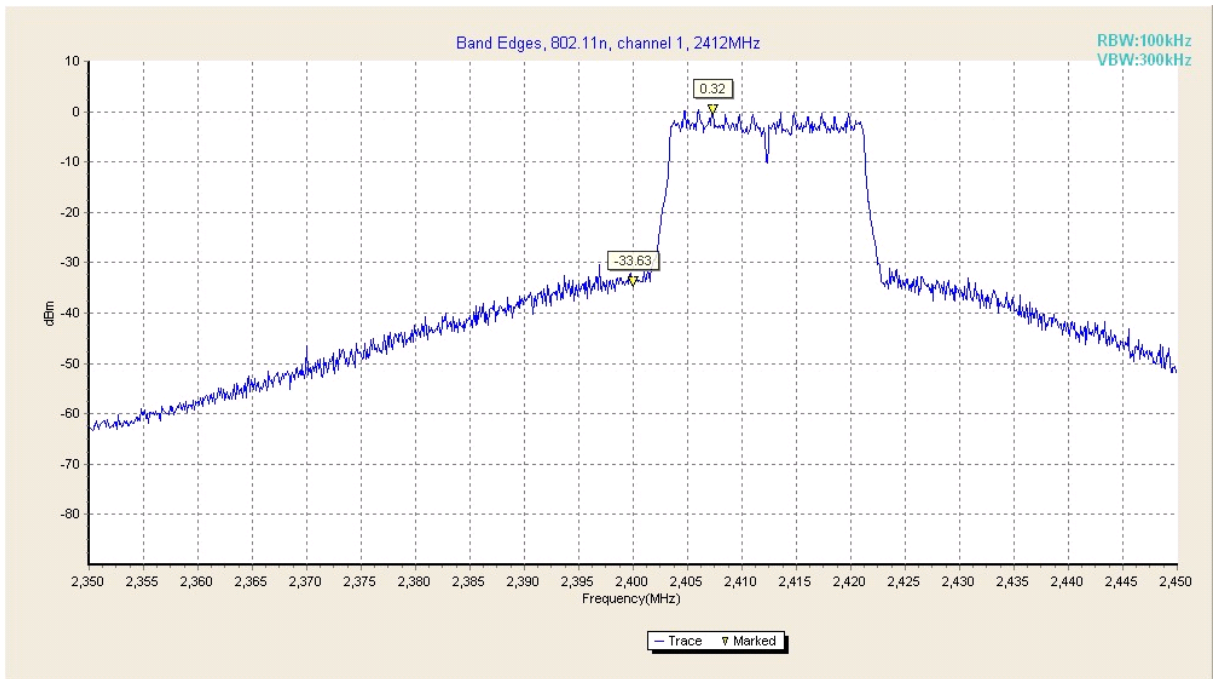

**Fig. 23 Band Edges (802.11 n-20MHz, Ch 1)**

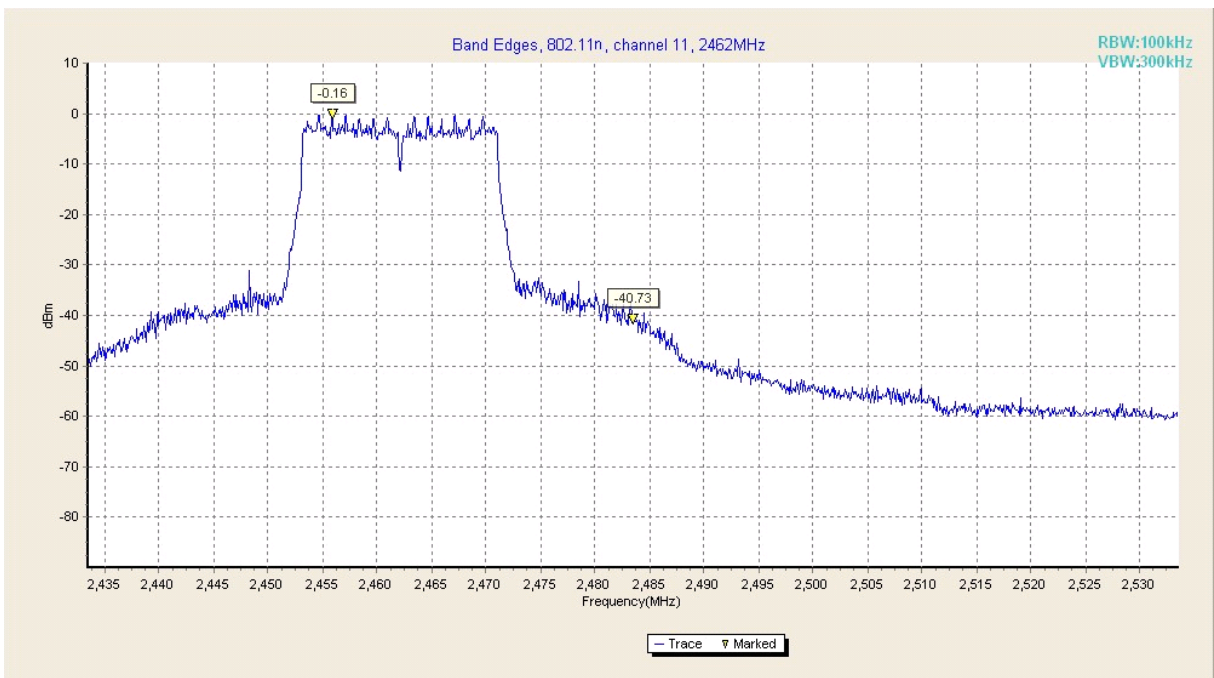

**Fig. 24 Band Edges (802.11 n-20MHz, Ch 11)**

## A.6. Transmitter Spurious Emission

### A.6.1 Transmitter Spurious Emission - Conducted

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) A8.5	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

#### Measurement Uncertainty:

Frequency Range	Uncertainty
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

#### Measurement Results:

##### 802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.25	P
		30 MHz-26 GHz	Fig.26	P
	6	2.437 GHz	Fig.27	P
		30 MHz-26 GHz	Fig.28	P
	11	2.462 GHz	Fig.29	P
		30 MHz-26 GHz	Fig.30	P
802.11g	1	2.412 GHz	Fig.31	P
		30 MHz-26 GHz	Fig.32	P
	6	2.437 GHz	Fig.33	P
		30 MHz-26 GHz	Fig.34	P
	11	2.462 GHz	Fig.35	P
		30 MHz-26 GHz	Fig.36	P


##### 802.11n mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	2.412 GHz	Fig.37	P
		30 MHz-26 GHz	Fig.38	P
	6	2.437 GHz	Fig.39	P
		30 MHz-26 GHz	Fig.40	P
	11	2.462 GHz	Fig.41	P

		30 MHz-26 GHz	Fig.42	P
802.11n (40MHz)	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/
	/	/	/	/
		/	/	/


**Conclusion: PASS**

**Test graphs as below:**

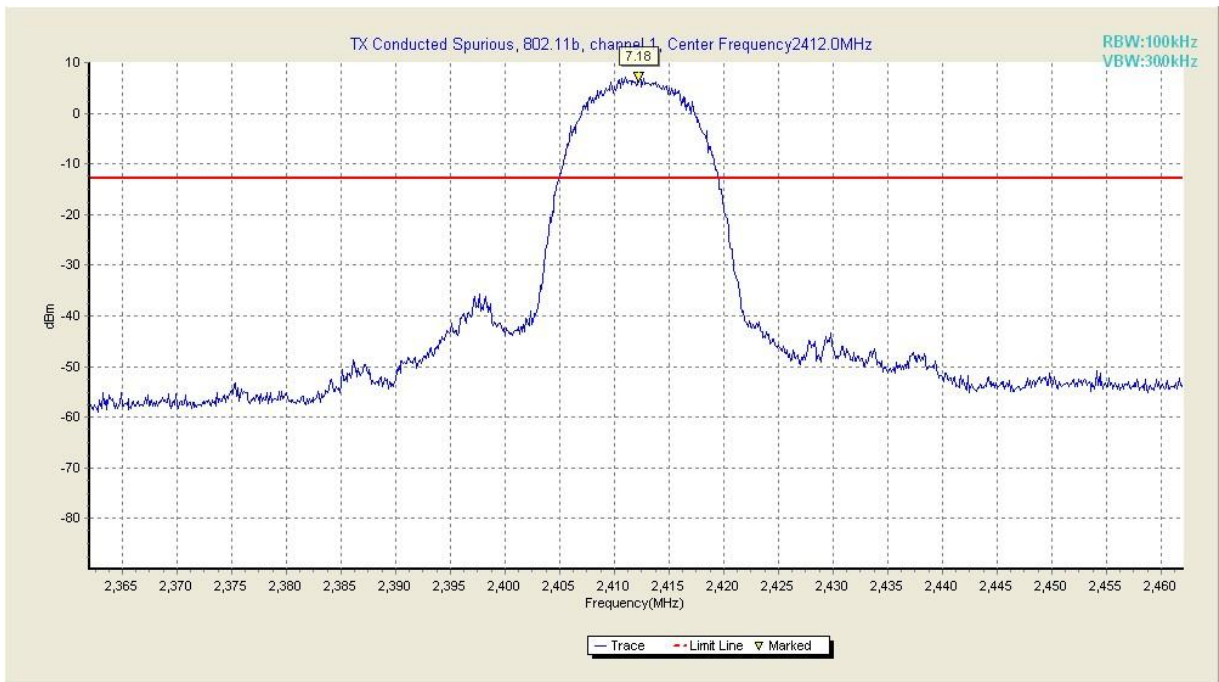


**Fig. 25 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)**




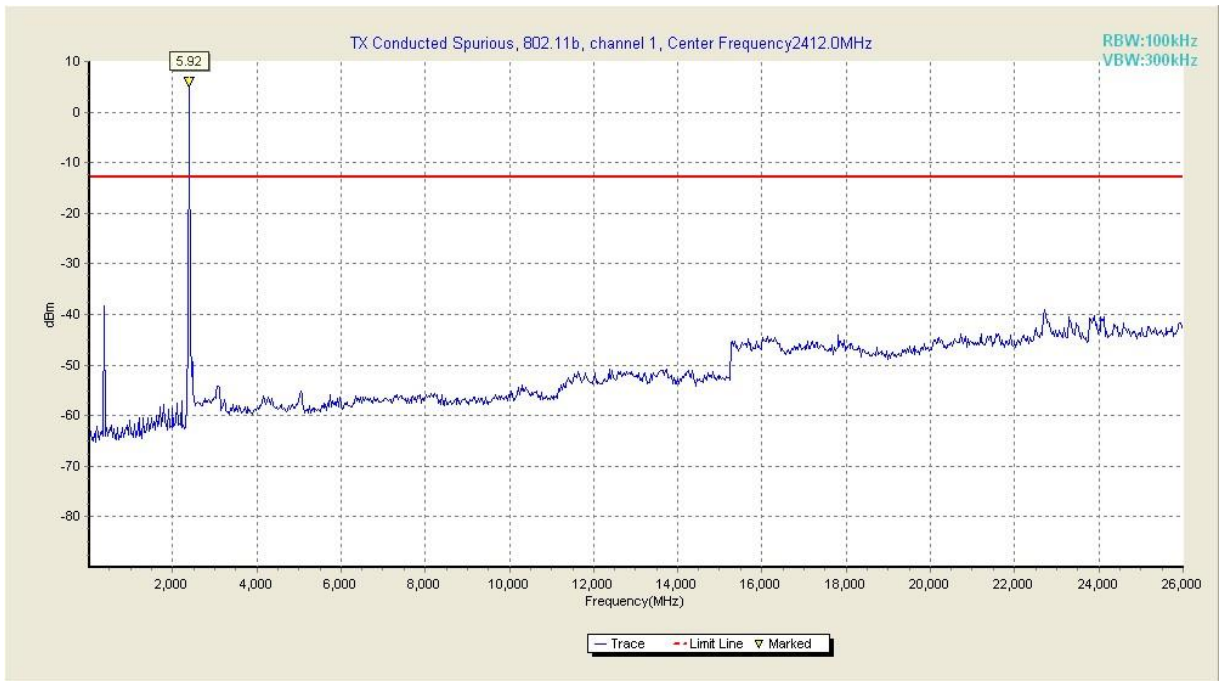


**Fig. 26 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-26 GHz)**

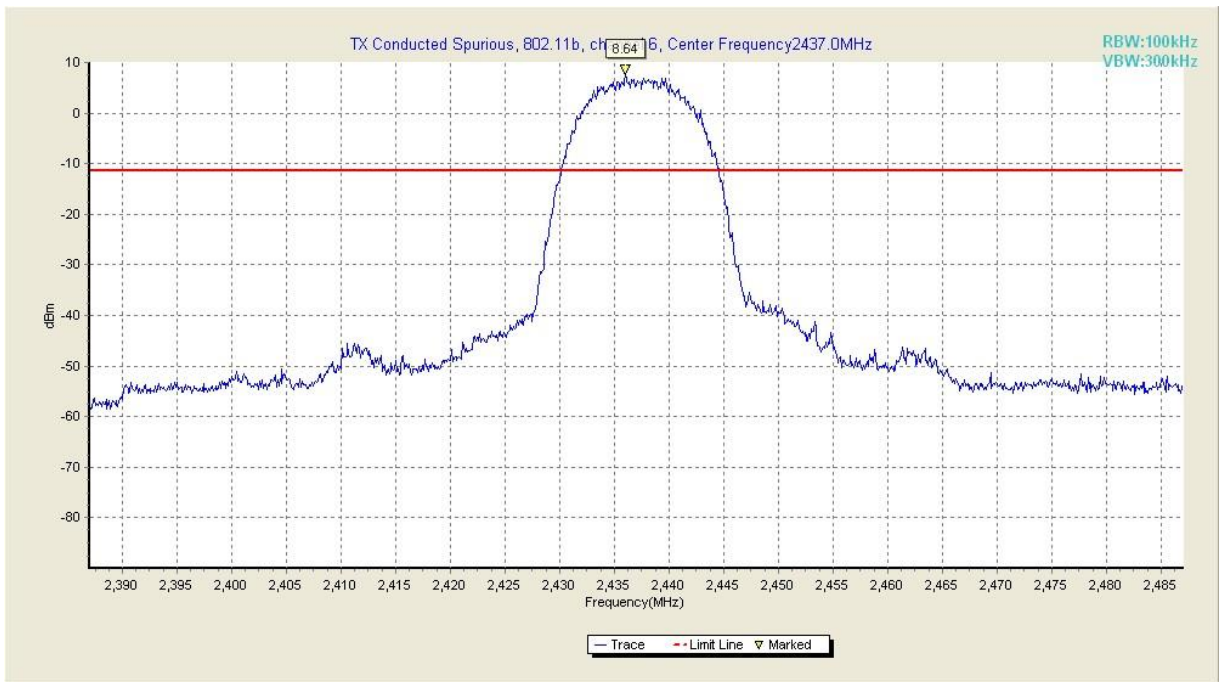


**Fig. 27 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)**

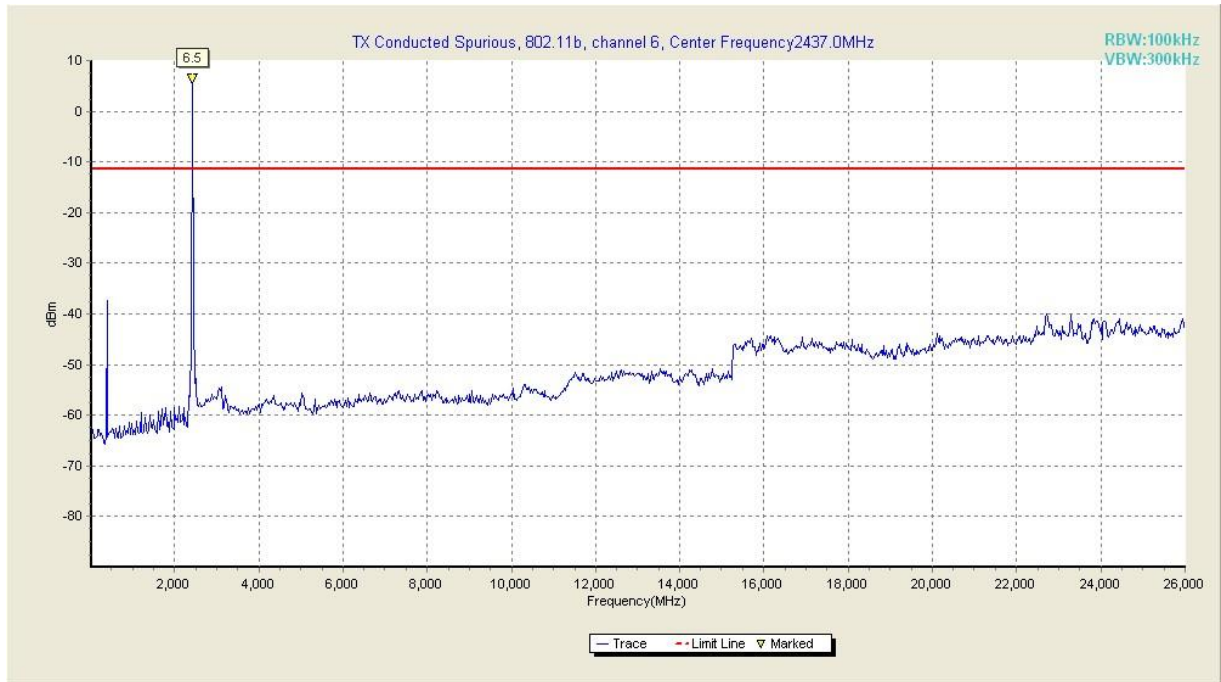


**Fig. 28 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-26 GHz)**

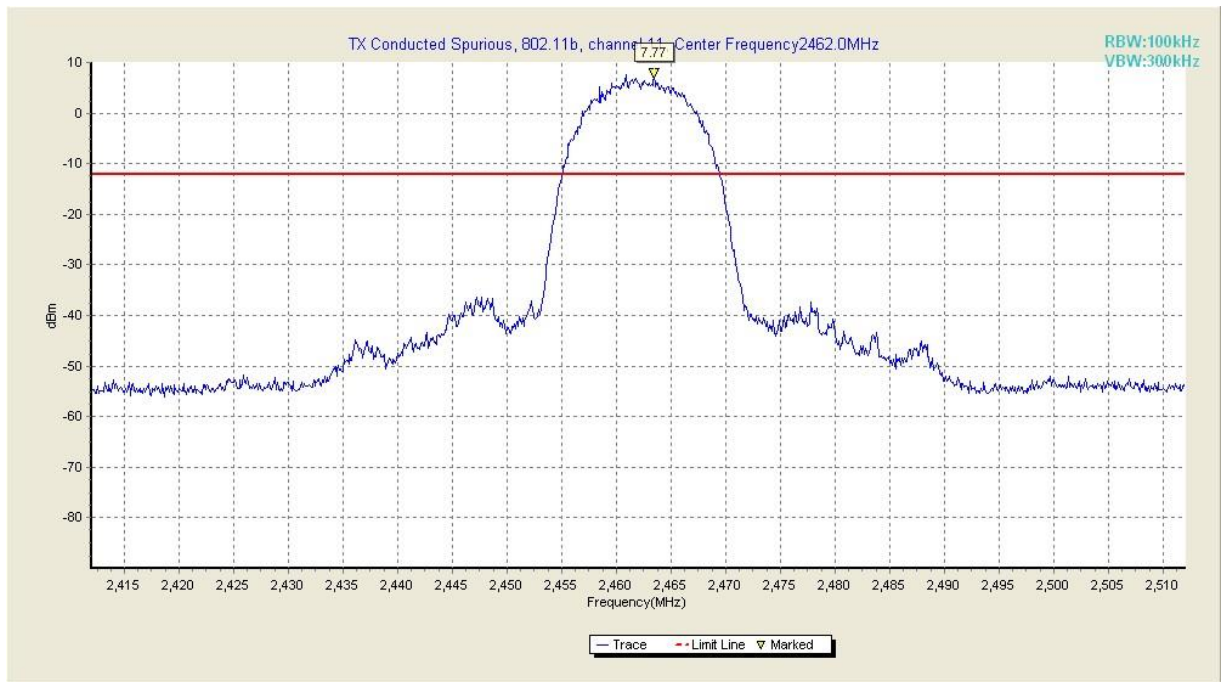


**Fig. 29 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)**

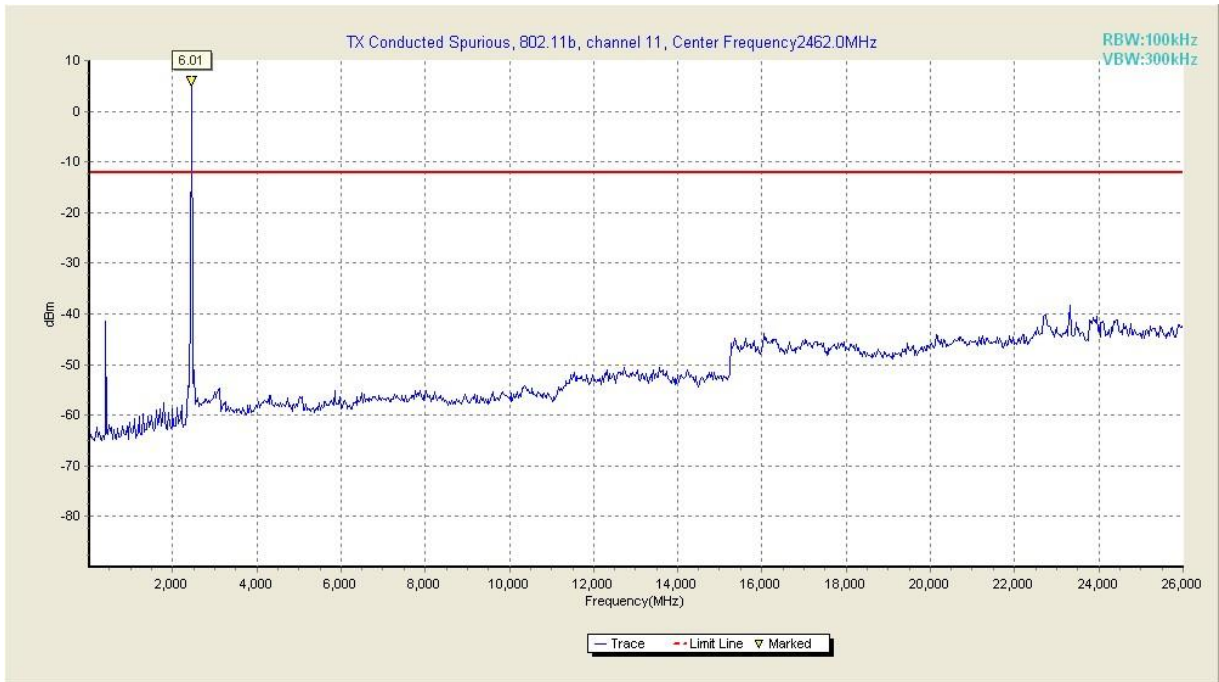


**Fig. 30 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-26 GHz)**

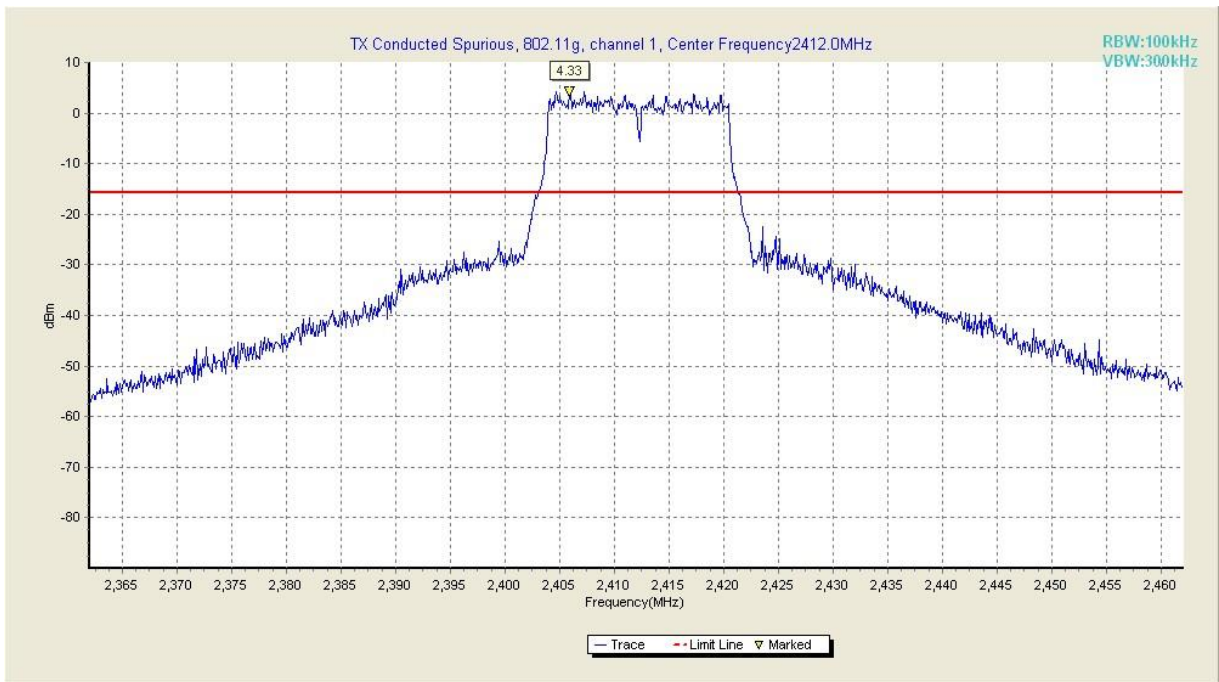


**Fig. 31 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)**

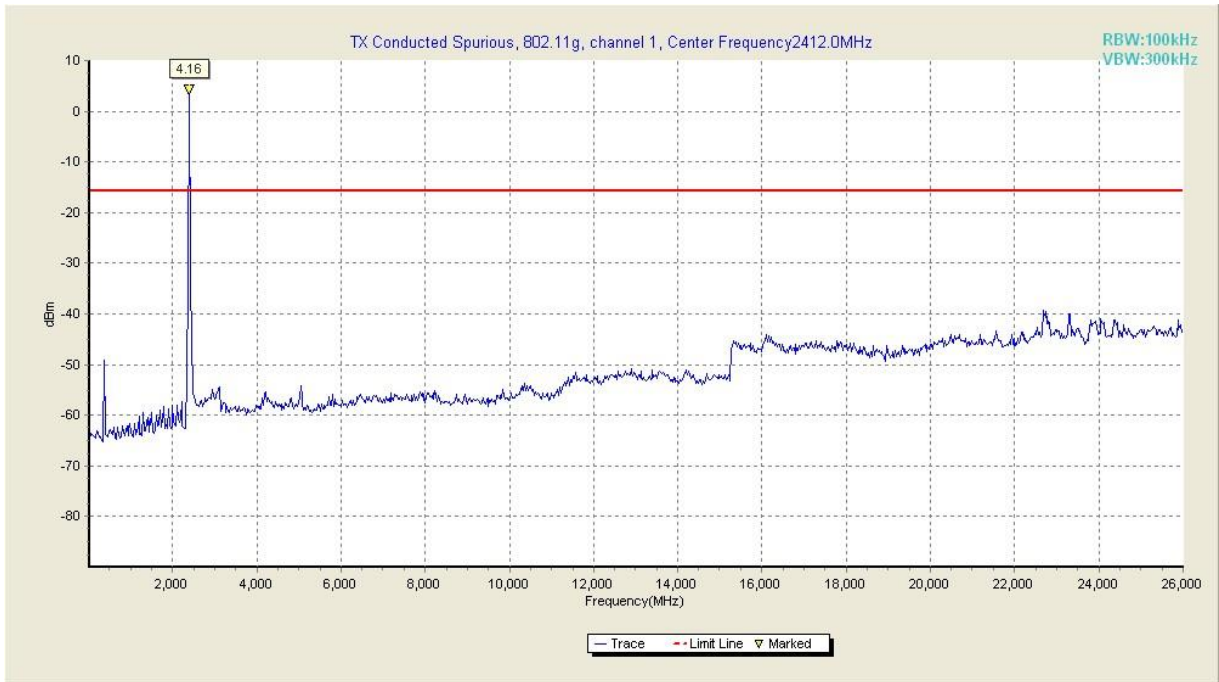


**Fig. 32 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-26 GHz)**

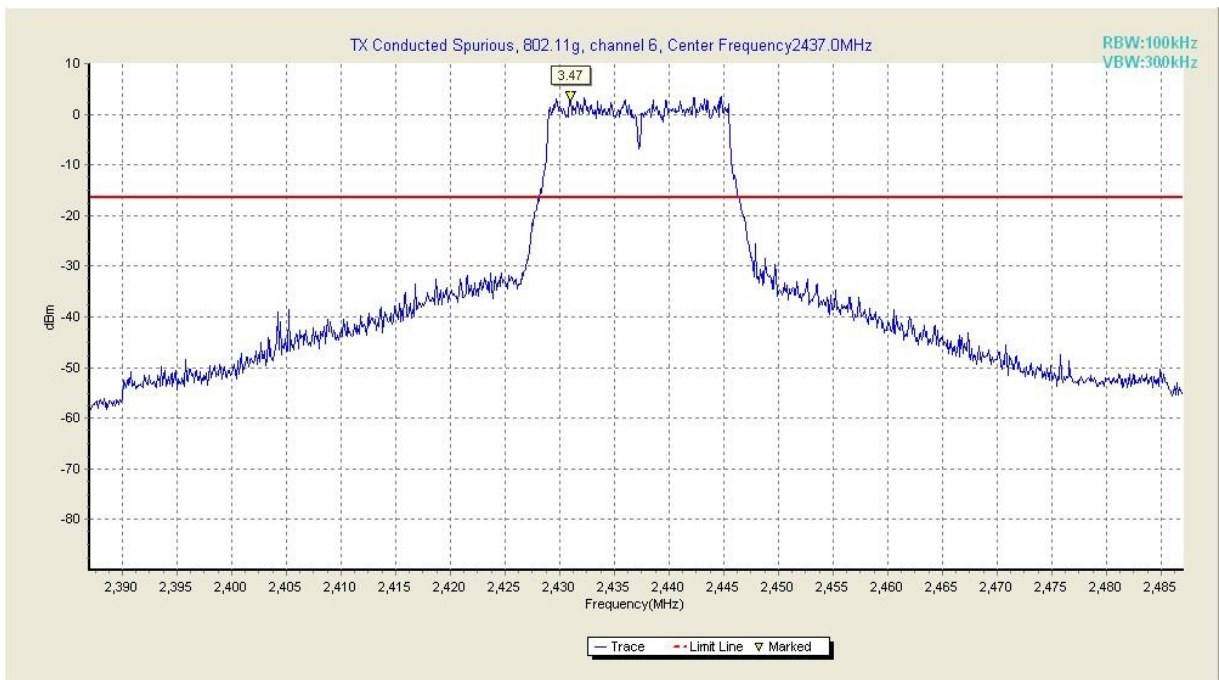


**Fig. 33 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)**

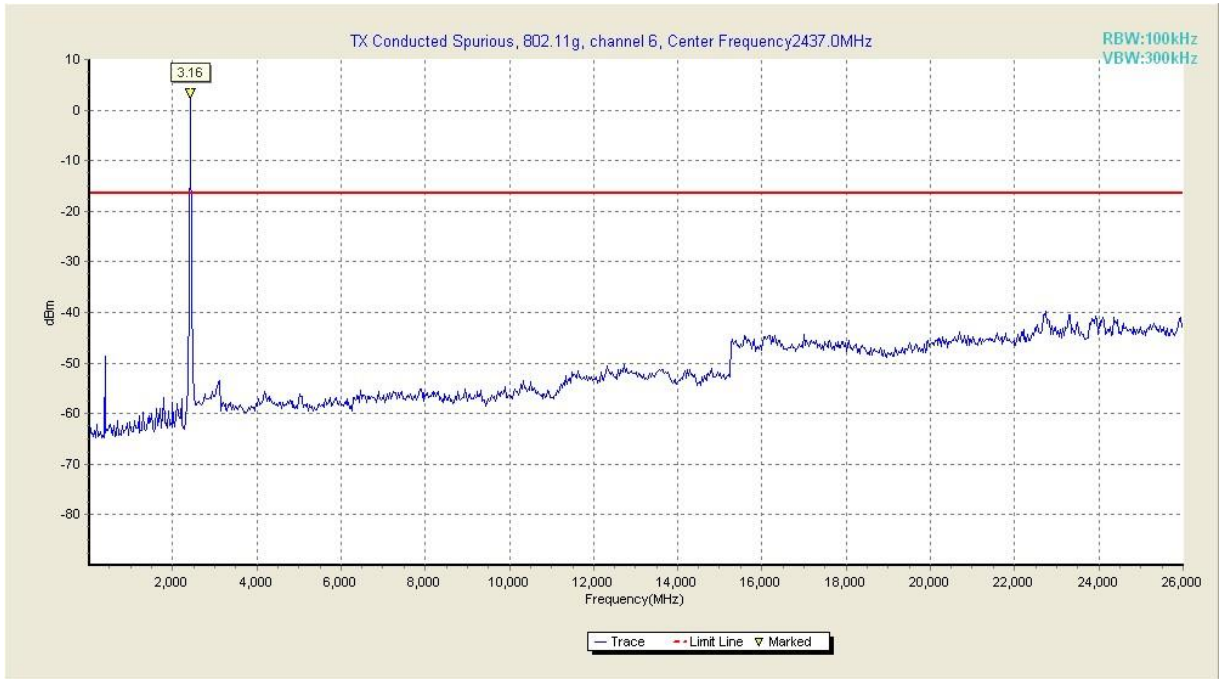


**Fig. 34 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-26 GHz)**

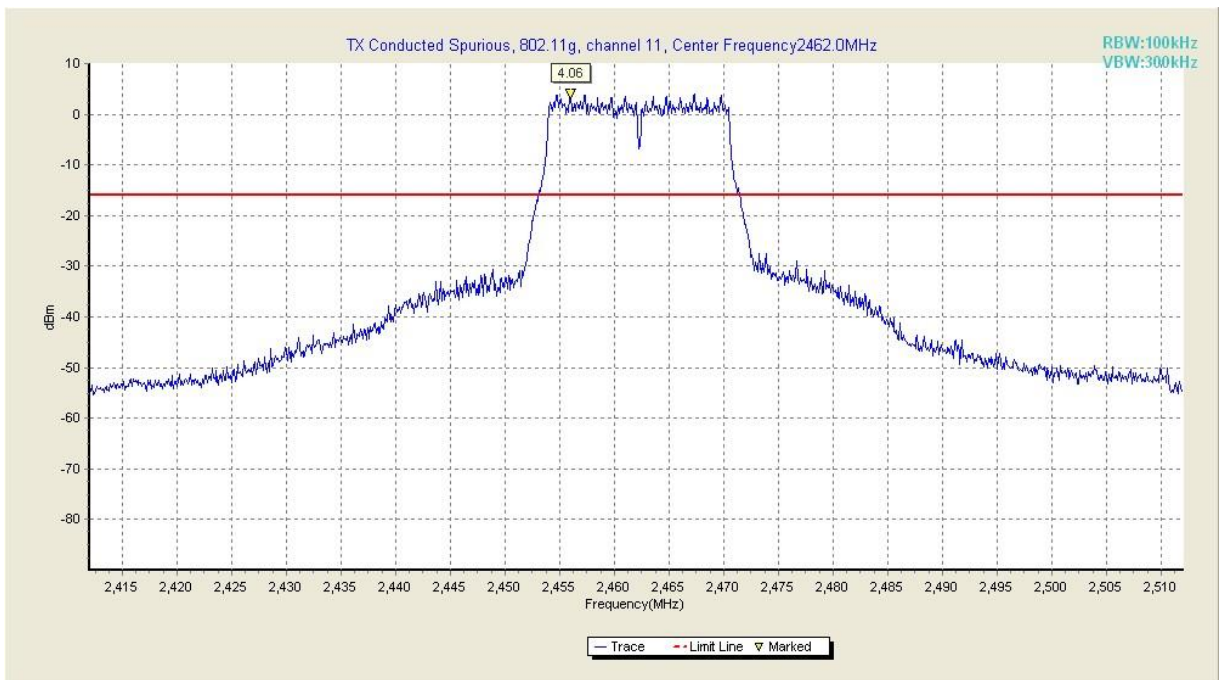


**Fig. 35 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)**

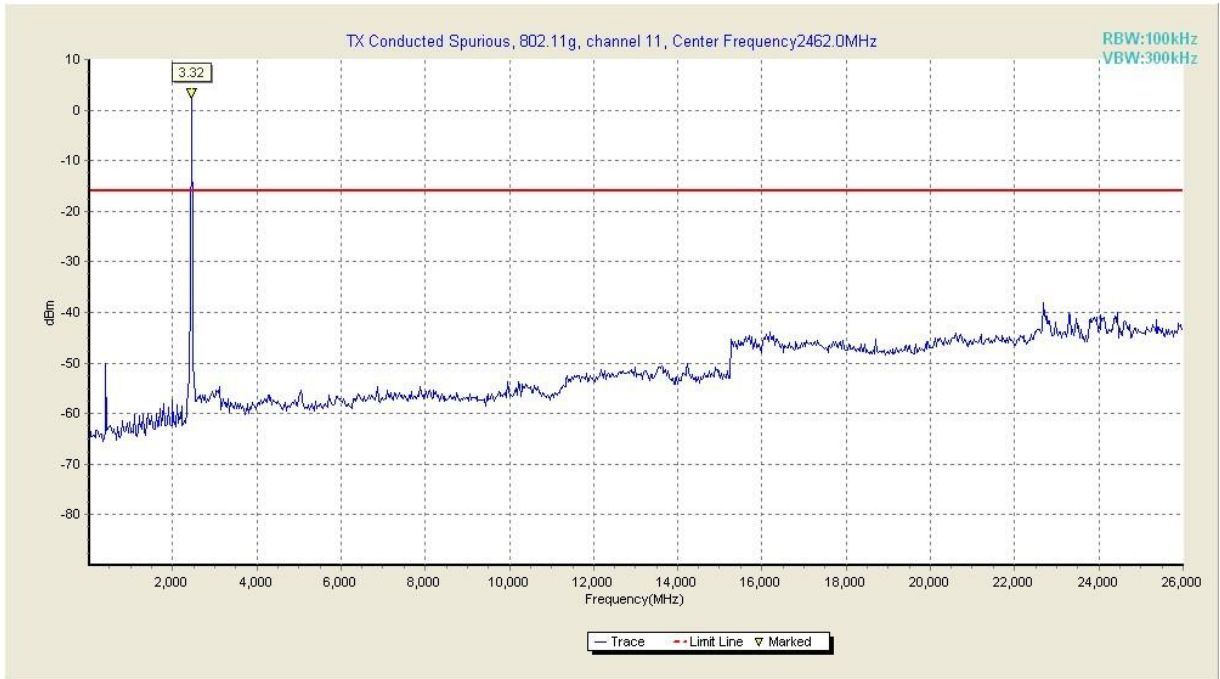


**Fig. 36 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-26 GHz)**

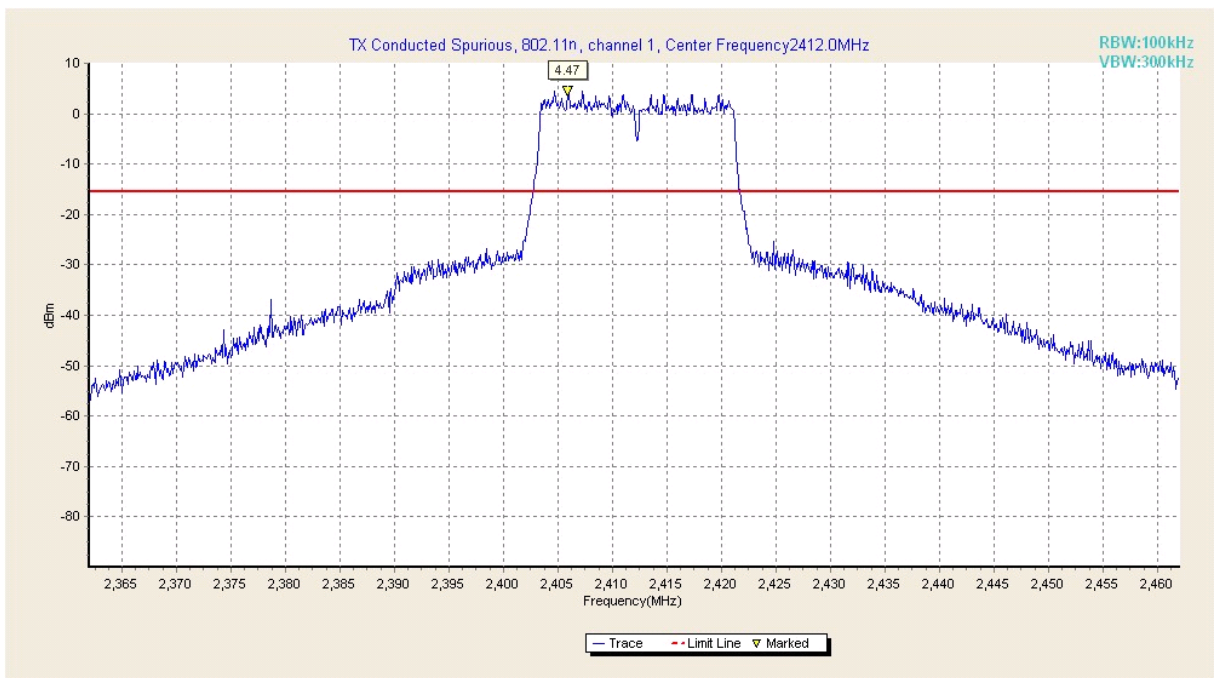

**Fig. 37 Conducted Spurious Emission (802.11n-20MHz, Ch1, Center Frequency)**

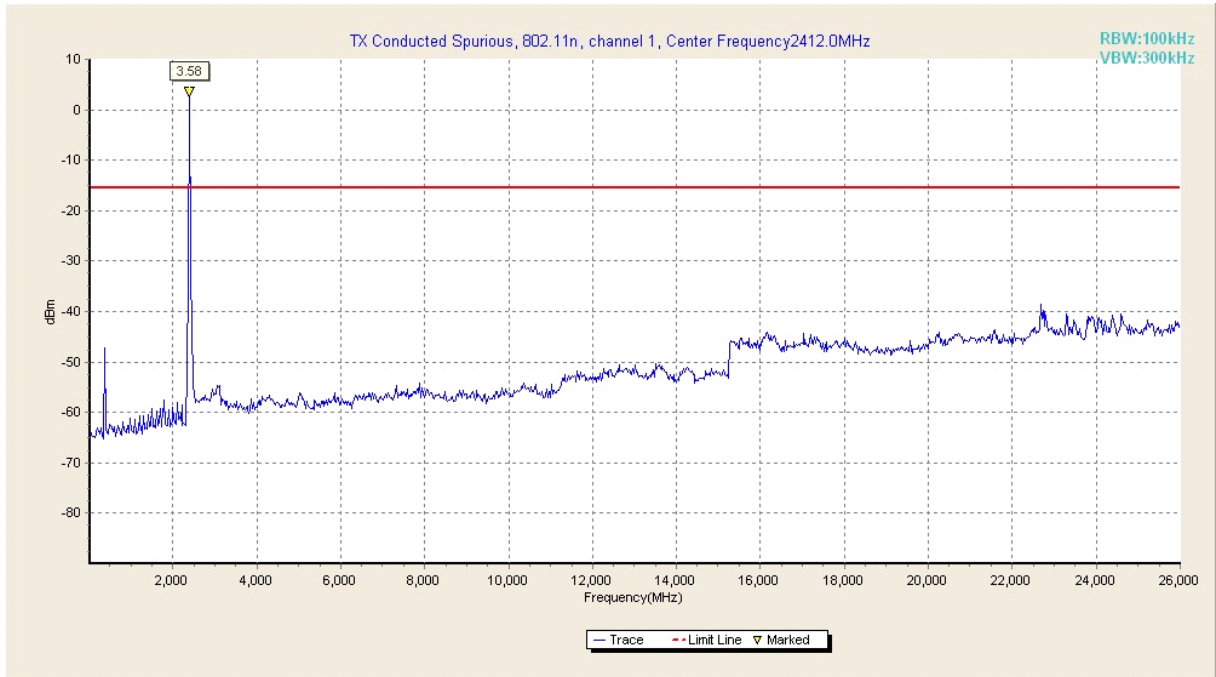

**Fig. 38 Conducted Spurious Emission (802.11 n-20MHz, Ch1, 30 MHz-26 GHz)**

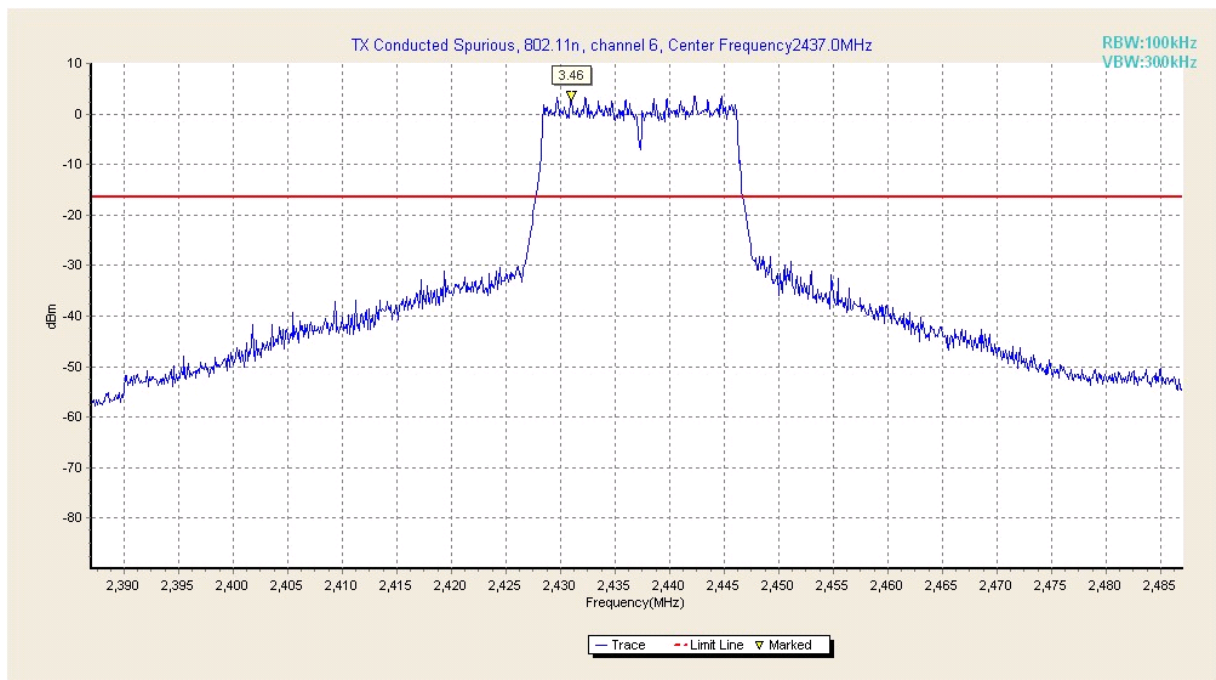

**Fig. 39 Conducted Spurious Emission (802.11 n-20MHz, Ch6, Center Frequency)**

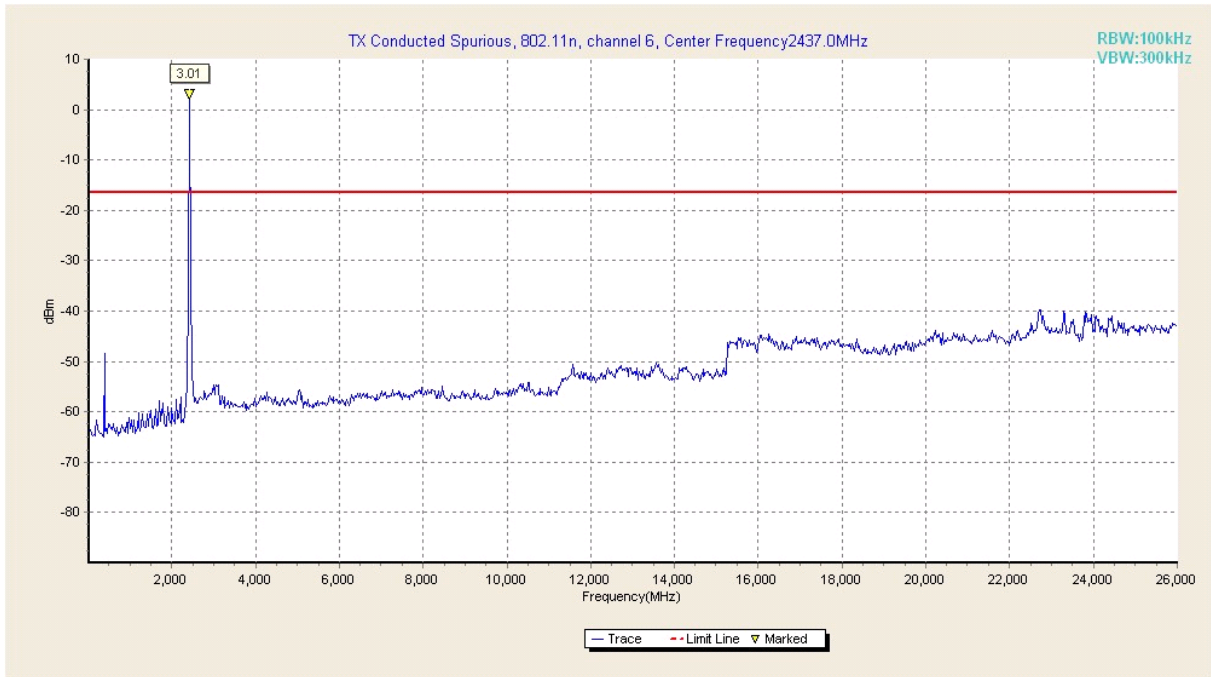


Fig. 40 Conducted Spurious Emission (802.11 n-20MHz, Ch6, 30 MHz-26 GHz)

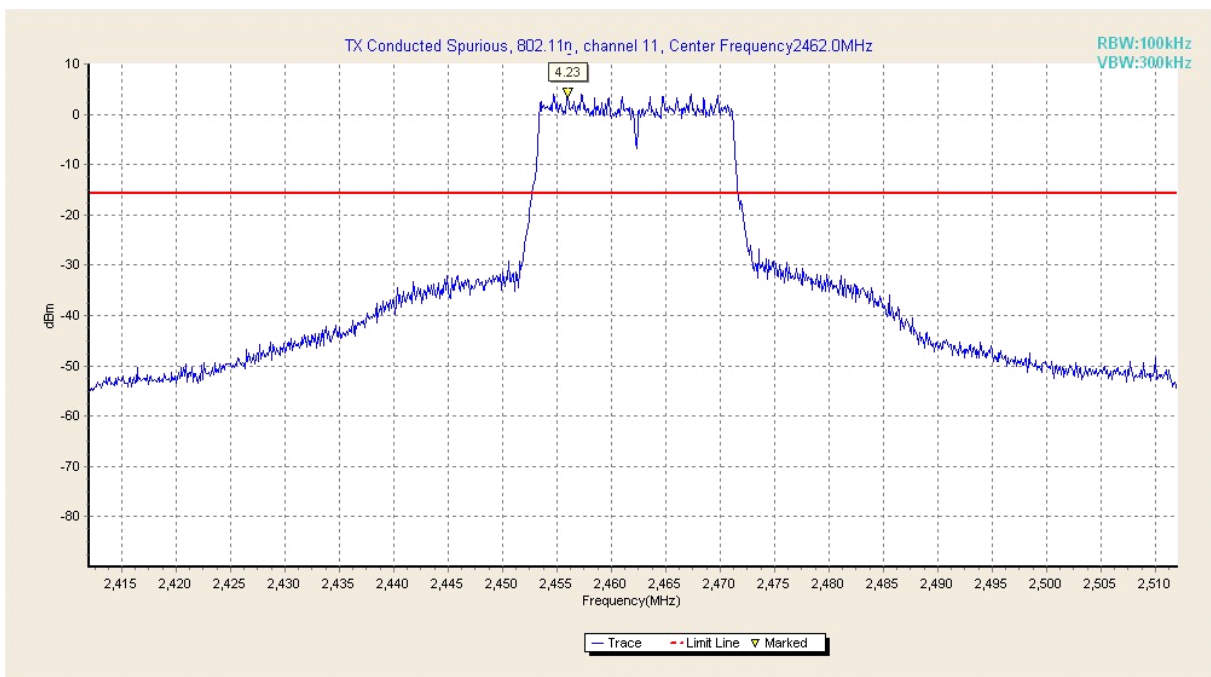


Fig. 41 Conducted Spurious Emission (802.11 n-20MHz, Ch11, Center Frequency)



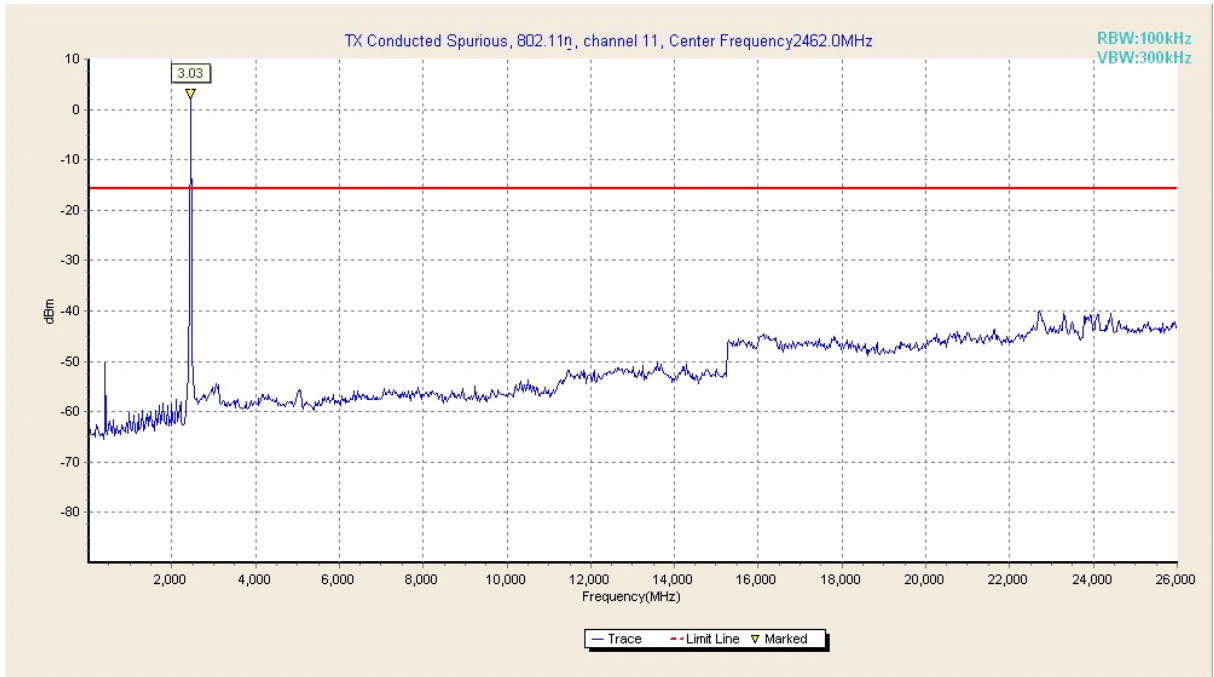


Fig. 42 Conducted Spurious Emission (802.11 n-20MHz, Ch11, 30 MHz-26 GHz)

### A.6.2 Transmitter Spurious Emission - Radiated

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 A8.5	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.4 and KDB558074.

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

#### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

**Measurement Results:**

**802.11b/g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.43GHz	Fig.43	P
	1	30 MHz ~1 GHz	Fig.44	P
		1 GHz ~ 4 GHz	Fig.45	P
		4 GHz ~ 18 GHz	Fig.46	P
	6	30 MHz ~1 GHz	Fig.47	P
		1 GHz ~ 4 GHz	Fig.48	P
		4 GHz ~ 18 GHz	Fig.49	P
	Power	2.45GHz ~2.5GHz	Fig.50	P
	11	30 MHz ~1 GHz	Fig.51	P
		1 GHz ~ 4 GHz	Fig.52	P
		4 GHz ~ 18 GHz	Fig.53	P
	802.11g	Power	2.38GHz ~2.43GHz	Fig.54
1		30 MHz ~1 GHz	Fig.55	P
		1 GHz ~ 4 GHz	Fig.56	P
		4 GHz ~ 18 GHz	Fig.57	P
6		30 MHz ~1 GHz	Fig.58	P
		1 GHz ~ 4 GHz	Fig.59	P
		4 GHz ~ 18 GHz	Fig.60	P
Power		2.45GHz ~2.5GHz	Fig.61	P
11		30 MHz ~1 GHz	Fig.62	P
		1 GHz ~ 4 GHz	Fig.63	P
		4 GHz ~ 18 GHz	Fig.64	P

**802.11n mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	Power	2.38GHz ~2.43GHz	Fig.65	P
	1	30 MHz ~1 GHz	Fig.66	P
		1 GHz ~ 4 GHz	Fig.67	P
		4 GHz ~ 18 GHz	Fig.68	P
	6	30 MHz ~1 GHz	Fig.69	P
		1 GHz ~ 4 GHz	Fig.70	P
		4 GHz ~ 18 GHz	Fig.71	P
	Power	2.45GHz ~2.5GHz	Fig.72	P
	11	30 MHz ~1 GHz	Fig.73	P
		1 GHz ~ 4 GHz	Fig.74	P
		4 GHz ~ 18 GHz	Fig.75	P
	802.11n (40MHz)	Power	/	/
/		/	/	/
/		/	/	/

		/	/	/
	/	/	/	/
	/	/	/	/
	Power	/	/	/
	/	/	/	/
	/	/	/	/
/	All channels	18 GHz~ 26.5 GHz	Fig.76	P

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**802.11b**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2414.83	85.92	-18.7	27.5	77.12	VERTICAL
2410.822	85.22	-18.7	27.5	76.42	VERTICAL
2418.838	77.48	-18.7	27.5	68.68	HORIZONTAL
2406.814	74.85	-18.7	27.5	66.05	HORIZONTAL
2422.846	51.13	-18.8	27.5	42.43	VERTICAL
2402.806	45.43	-18.7	27.5	36.63	VERTICAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2438.878	87.71	-18.9	27.5	79.11	VERTICAL
2434.87	87.38	-18.9	27.5	78.78	HORIZONTAL
2442.886	81.54	-18.9	27.5	72.94	HORIZONTAL
2430.862	71.71	-18.9	27.5	63.11	HORIZONTAL
2446.894	59.16	-18.9	27.5	50.56	VERTICAL
2422.846	44.26	-18.8	27.5	35.56	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2462.926	80.34	-18.6	27.5	71.44	VERTICAL
2466.934	77.73	-18.6	27.5	68.83	VERTICAL
2458.918	76.93	-18.7	27.5	68.13	HORIZONTAL
2470.942	58.11	-18.4	27.5	49.01	HORIZONTAL
2454.91	57.14	-18.7	27.5	48.34	VERTICAL
3699.399	41.58	-19.2	33.4	27.38	VERTICAL

**802.11g**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2410.822	76.3	-18.7	27.5	67.5	VERTICAL
2414.83	76.22	-18.7	27.5	67.42	VERTICAL
2418.838	75.73	-18.7	27.5	66.93	VERTICAL
2406.814	75.51	-18.7	27.5	66.71	VERTICAL
2422.846	63.05	-18.8	27.5	54.35	HORIZONTAL
2402.806	60.3	-18.7	27.5	51.5	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2434.87	85.25	-18.9	27.5	76.65	HORIZONTAL
2442.886	85.05	-18.9	27.5	76.45	VERTICAL
2430.862	84.81	-18.9	27.5	76.21	HORIZONTAL
2438.878	84.04	-18.9	27.5	75.44	HORIZONTAL
2446.894	78.99	-18.9	27.5	70.39	HORIZONTAL
2426.854	59.99	-18.8	27.5	51.29	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2458.918	76.02	-18.7	27.5	67.22	VERTICAL
2466.934	75.93	-18.6	27.5	67.03	HORIZONTAL
2462.926	75.41	-18.6	27.5	66.51	HORIZONTAL
2454.91	73.1	-18.7	27.5	64.3	VERTICAL
2470.942	72.63	-18.4	27.5	63.53	HORIZONTAL
2474.95	43.75	-18.4	27.5	34.65	VERTICAL

**802.11n-20MHz**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2410.822	79.95	-18.7	27.5	71.15	HORIZONTAL
2414.83	79.62	-18.7	27.5	70.82	HORIZONTAL
2406.814	79.16	-18.7	27.5	70.36	VERTICAL
2418.838	79.11	-18.7	27.5	70.31	VERTICAL
2422.846	71.18	-18.8	27.5	62.48	VERTICAL
2402.806	68.78	-18.7	27.5	59.98	HORIZONTAL


Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2430.862	88.04	-18.9	27.5	79.44	VERTICAL
2434.87	87.98	-18.9	27.5	79.38	VERTICAL
2442.886	87.04	-18.9	27.5	78.44	HORIZONTAL
2438.878	86.69	-18.9	27.5	78.09	HORIZONTAL
2446.894	83.15	-18.9	27.5	74.55	HORIZONTAL
2426.854	68.48	-18.8	27.5	59.78	VERTICAL


Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2458.918	76.49	-18.7	27.5	67.69	HORIZONTAL
2466.934	76.48	-18.6	27.5	67.58	VERTICAL
2462.926	75.88	-18.6	27.5	66.98	VERTICAL
2454.91	75.56	-18.7	27.5	66.76	HORIZONTAL
2470.942	74.91	-18.4	27.5	65.81	VERTICAL
2474.95	48.28	-18.4	27.5	39.18	VERTICAL

Test graphs as below:

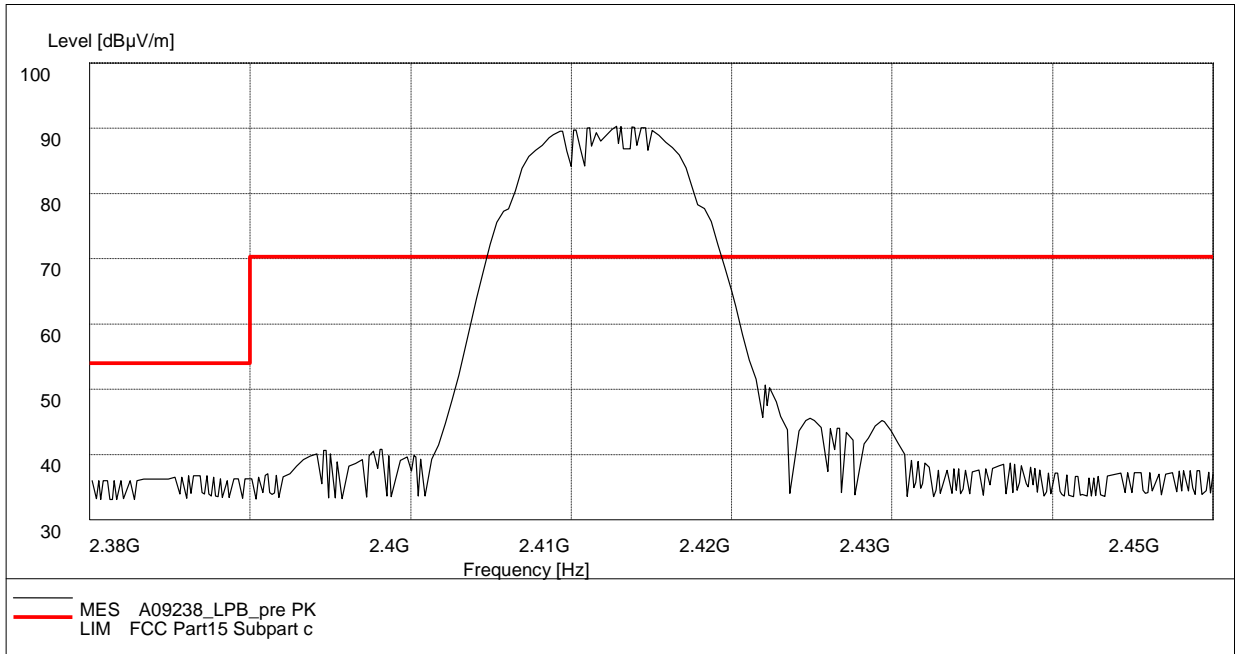


**Fig. 43 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz - 2.45GHz**

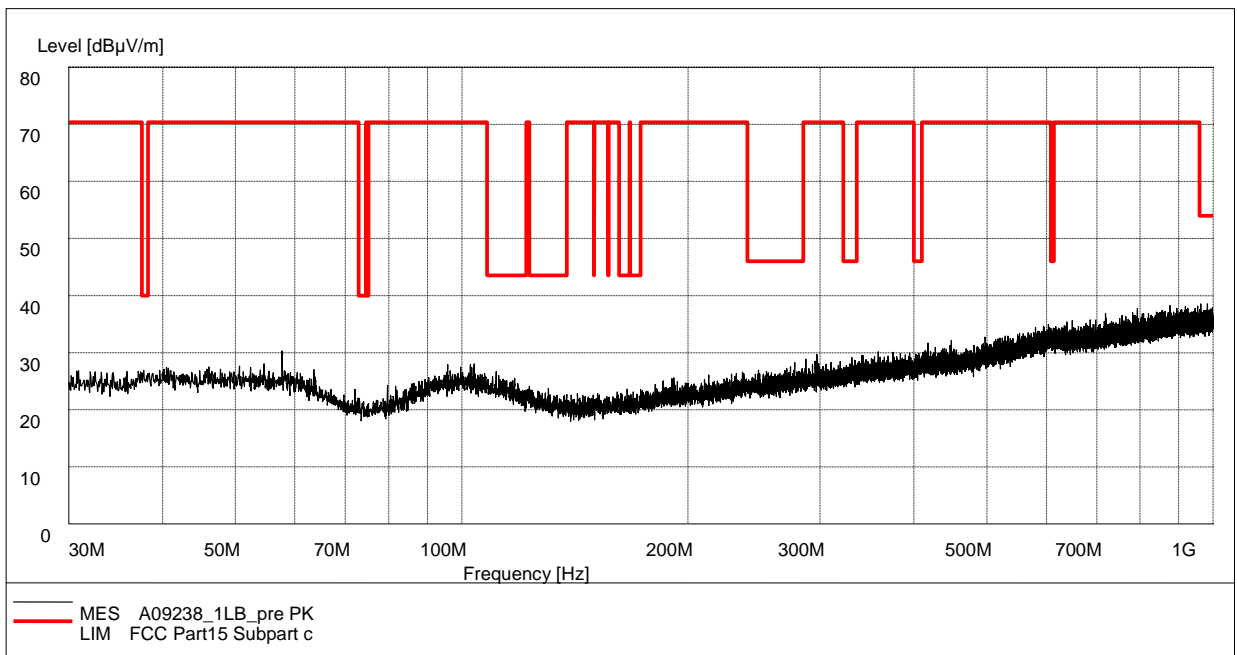


**Fig. 44 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)**




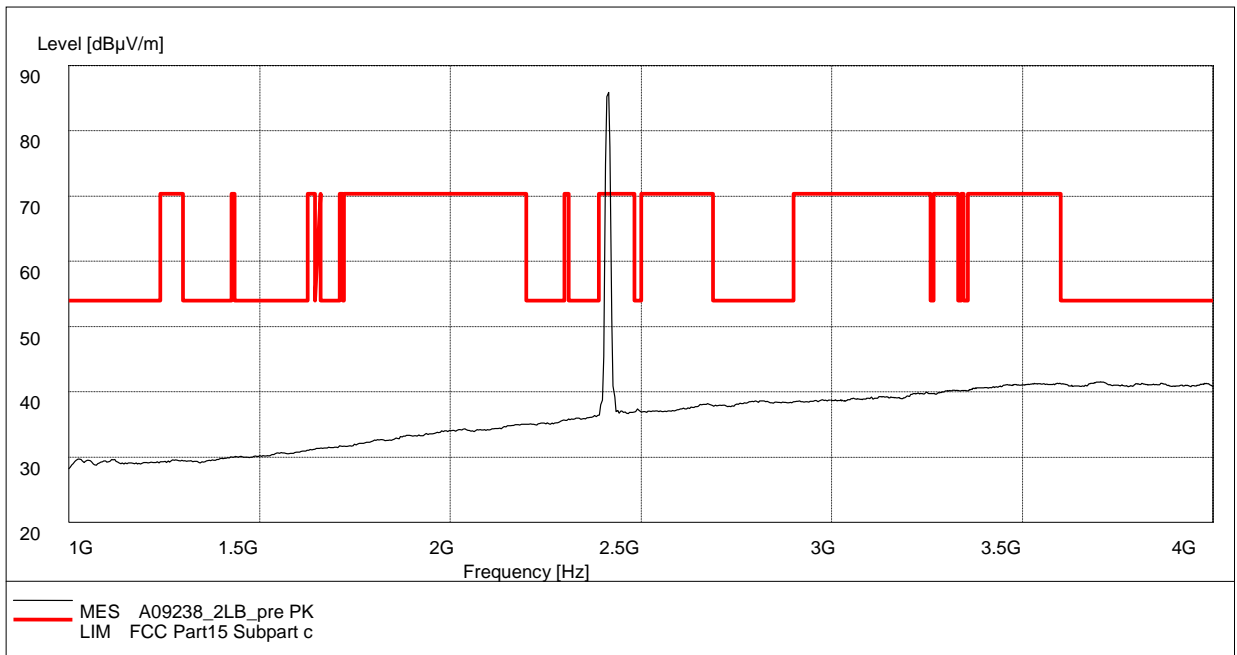


**Fig. 45 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)**

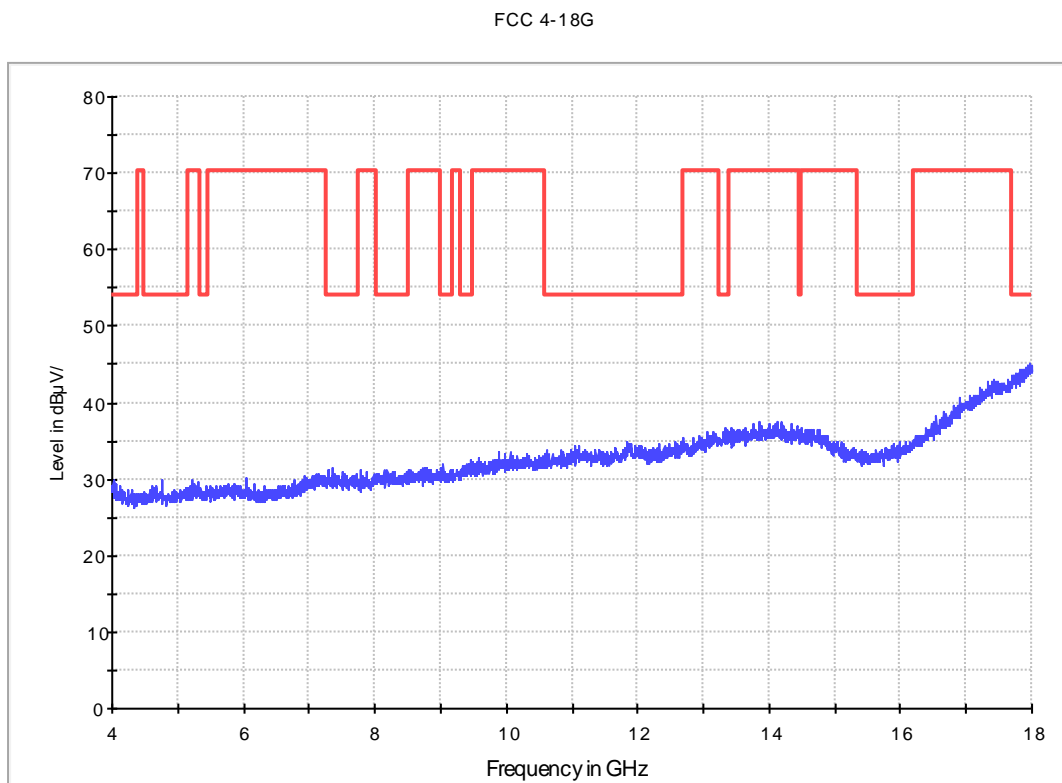

**Fig. 46 Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)**

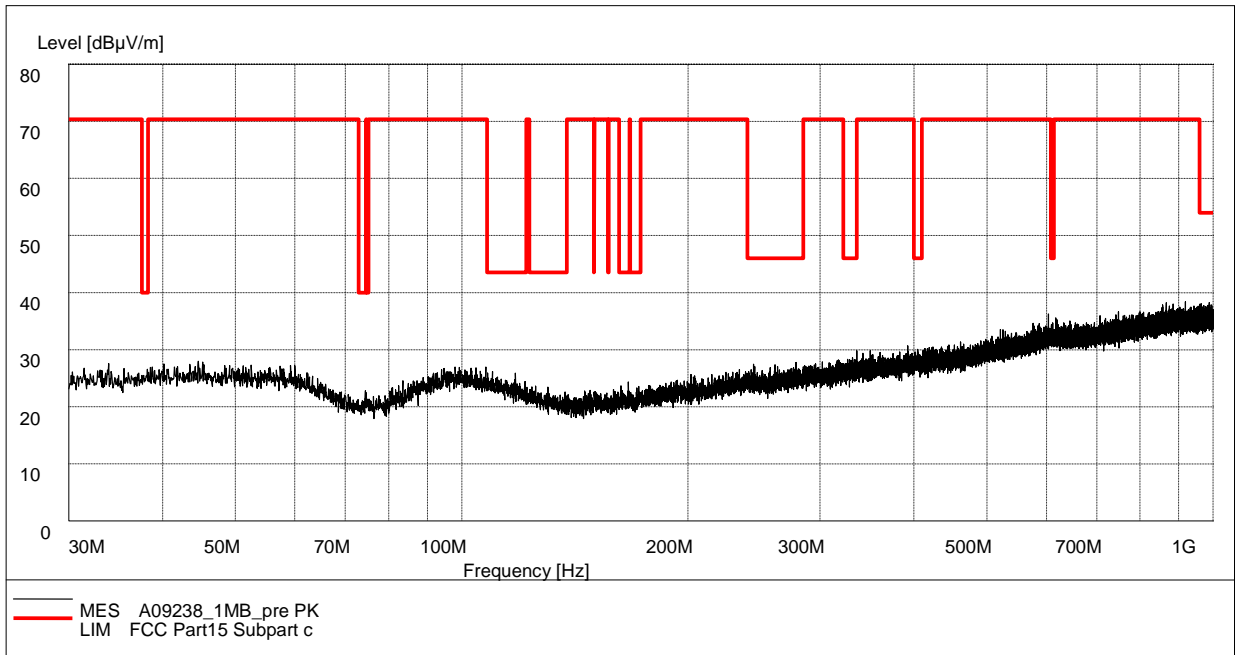

**Fig. 47 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)**

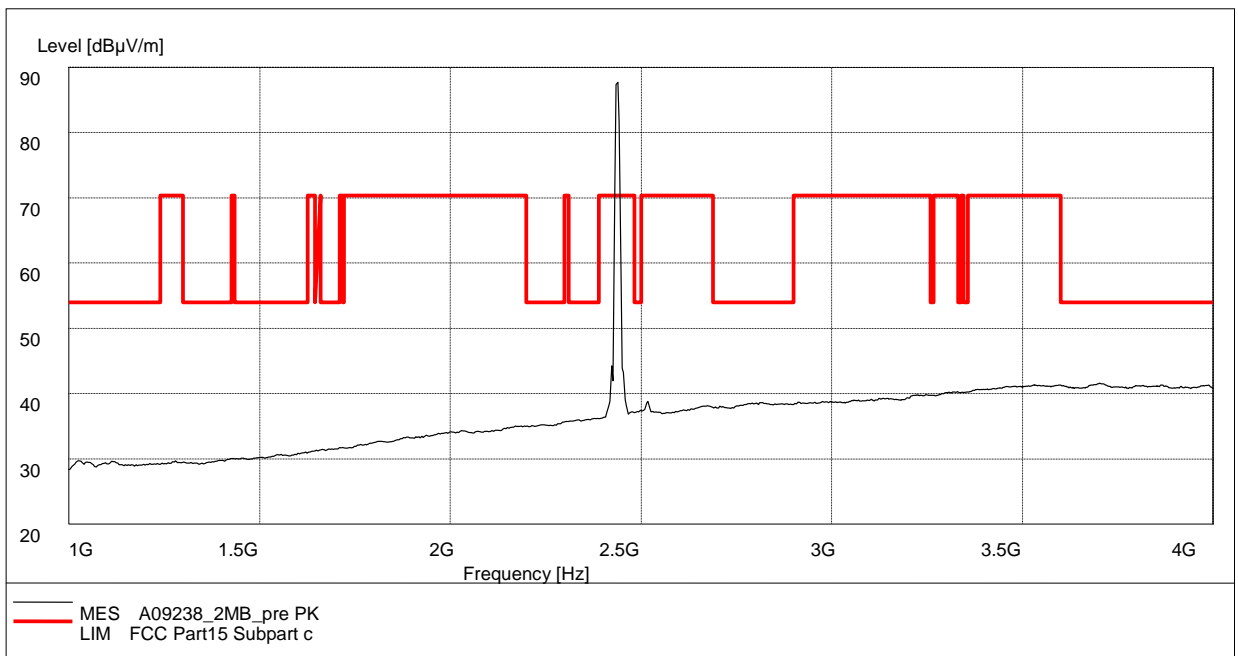

**Fig. 48 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)**

FCC 4-18G

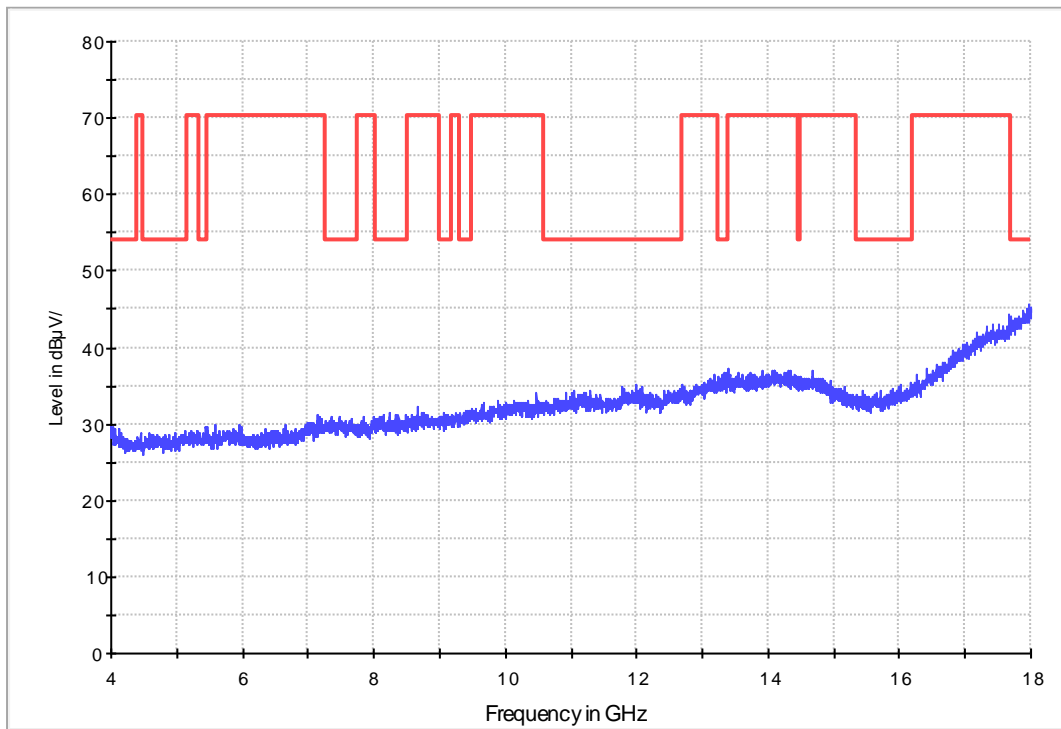


Fig. 49 Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)



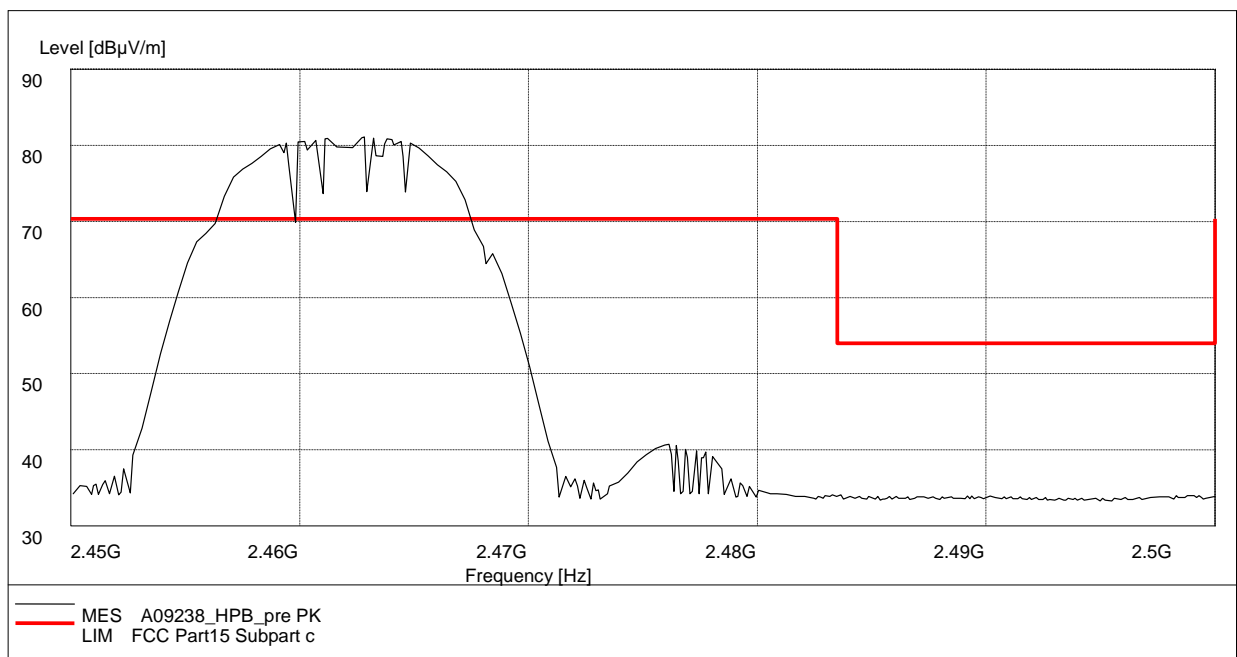


Fig. 50 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

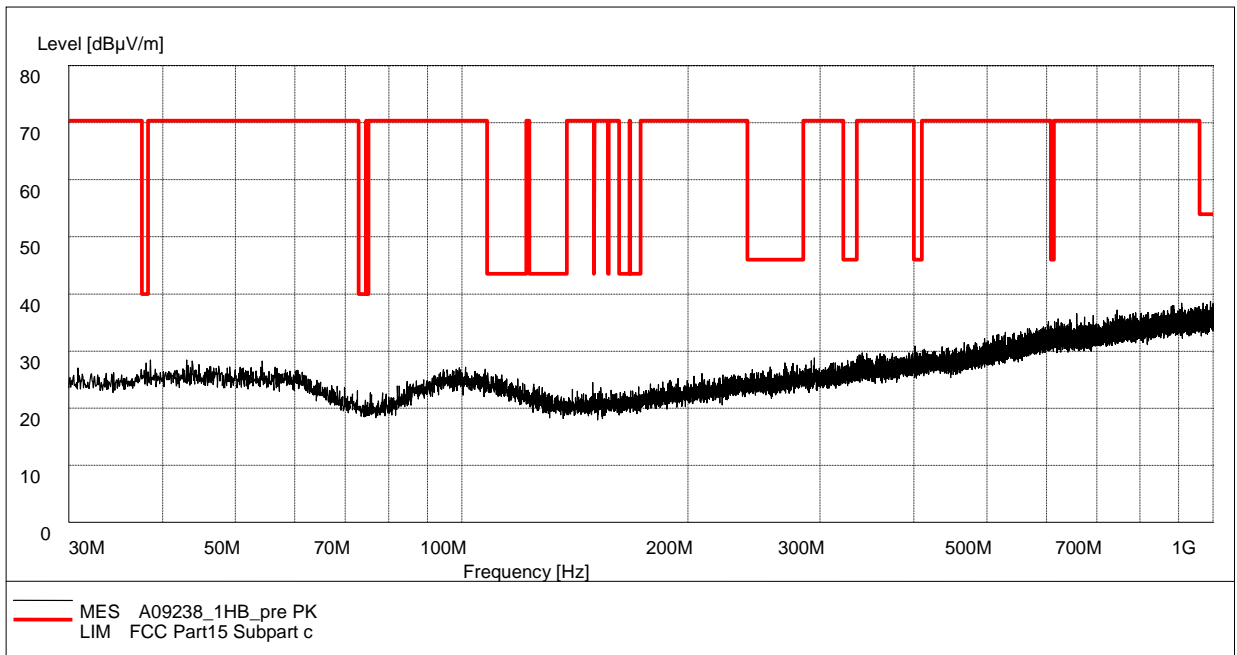

**Fig. 51 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)**

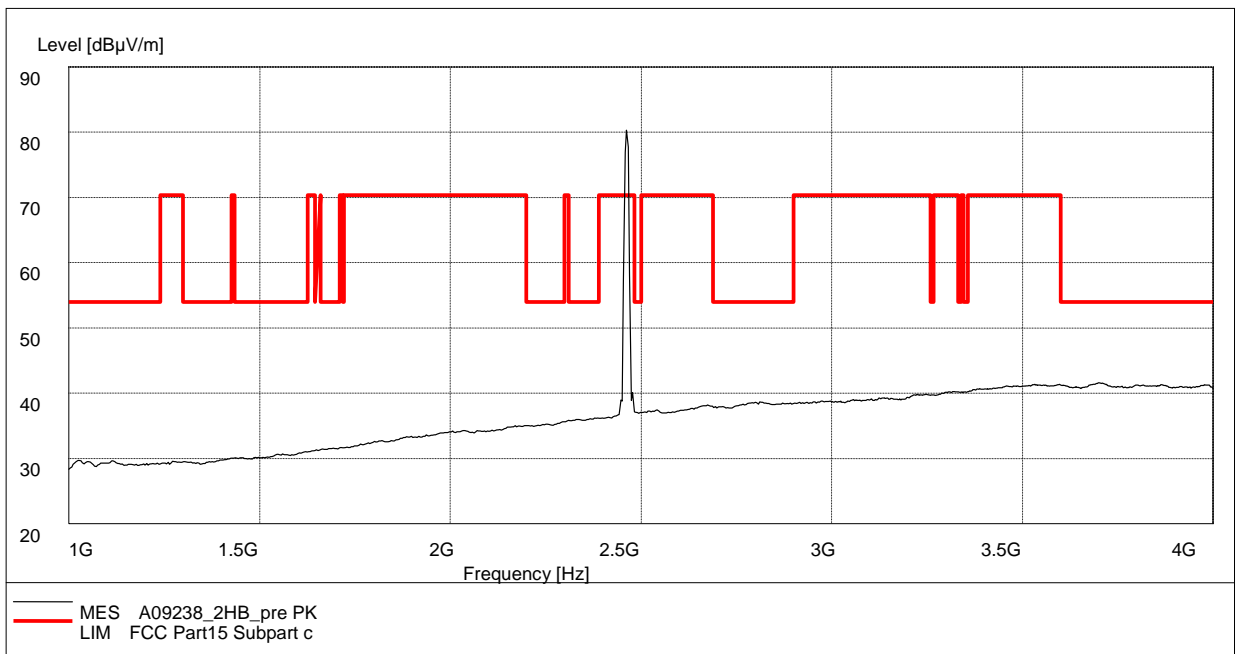

**Fig. 52 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)**

FCC 4-18G

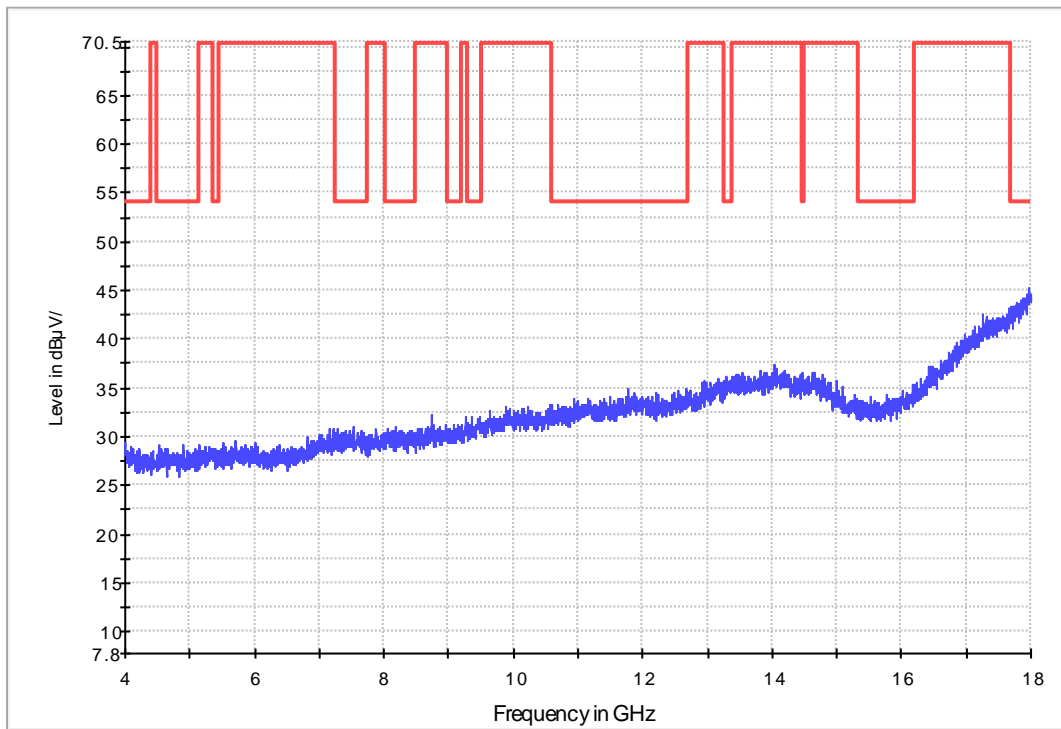


Fig. 53 Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz)



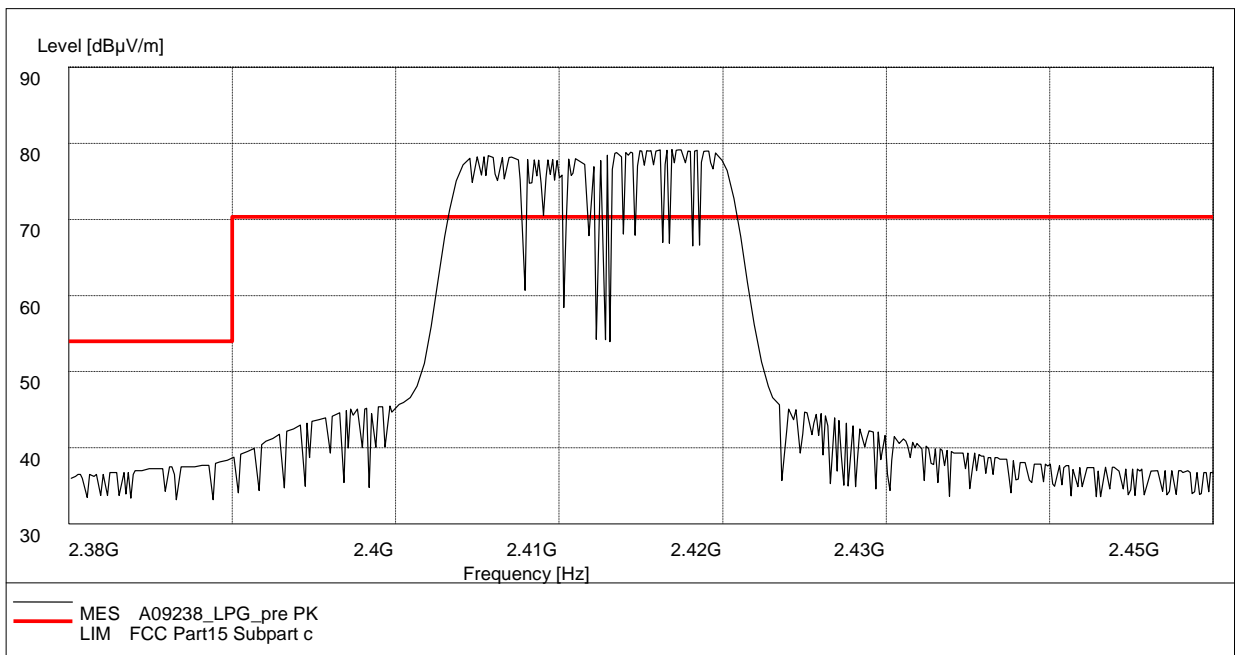


Fig. 54 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

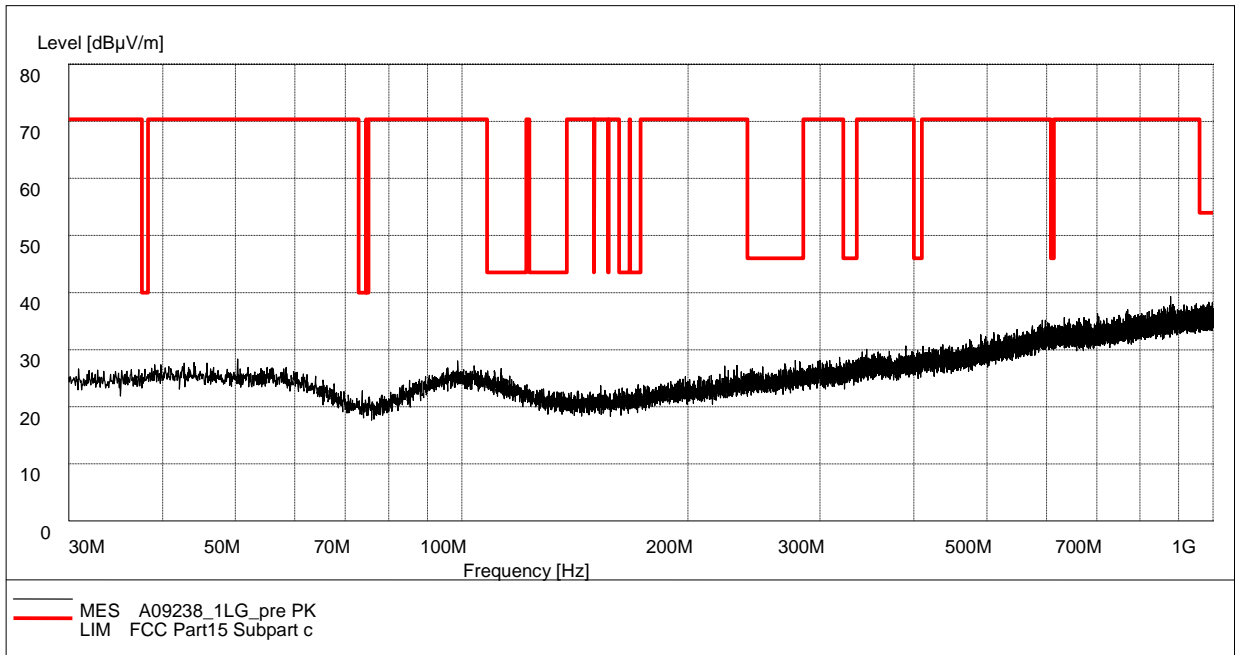


**Fig. 55 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)**

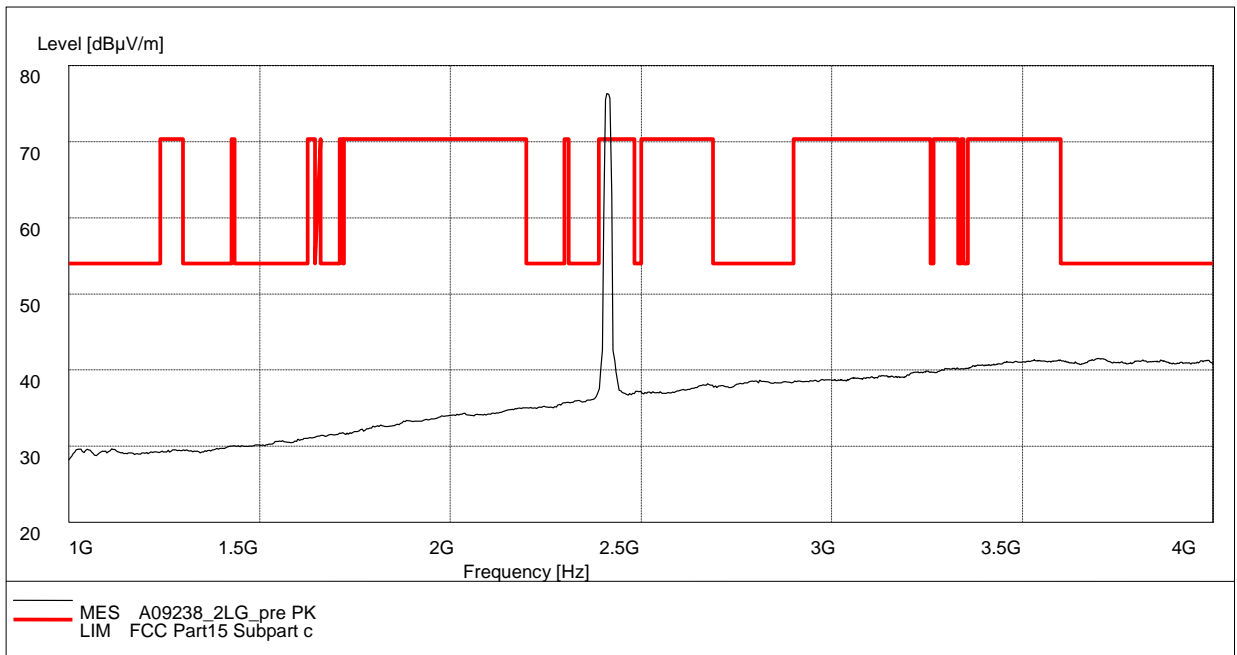


**Fig. 56 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)**


FCC 4-18G

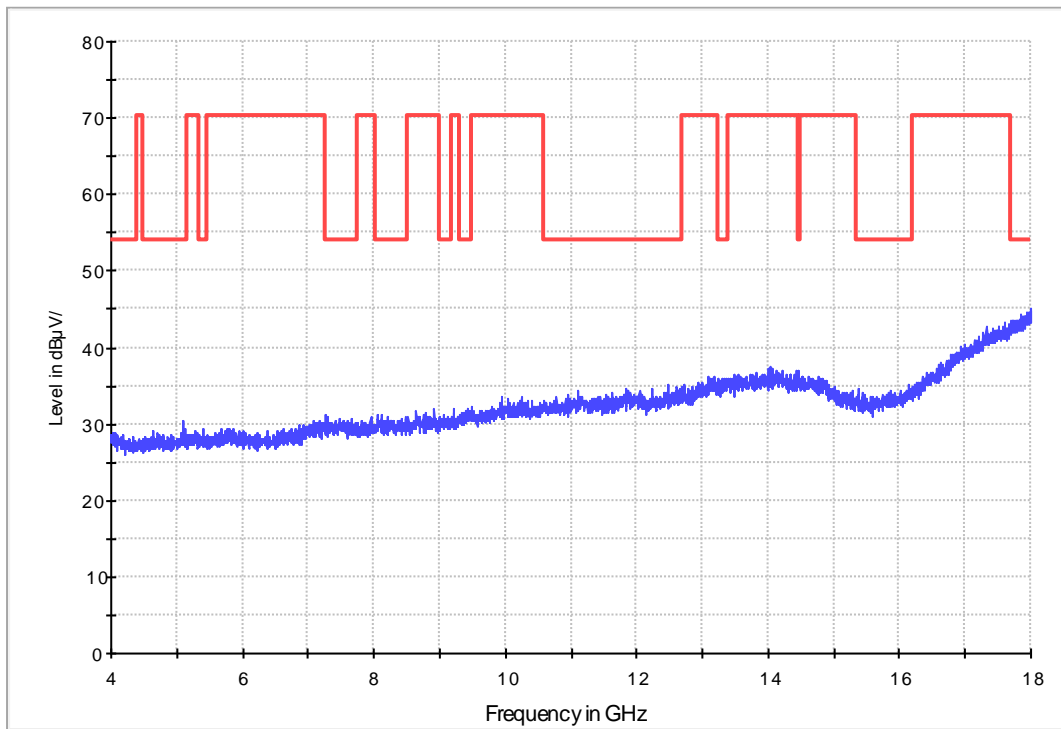


**Fig. 57 Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)**

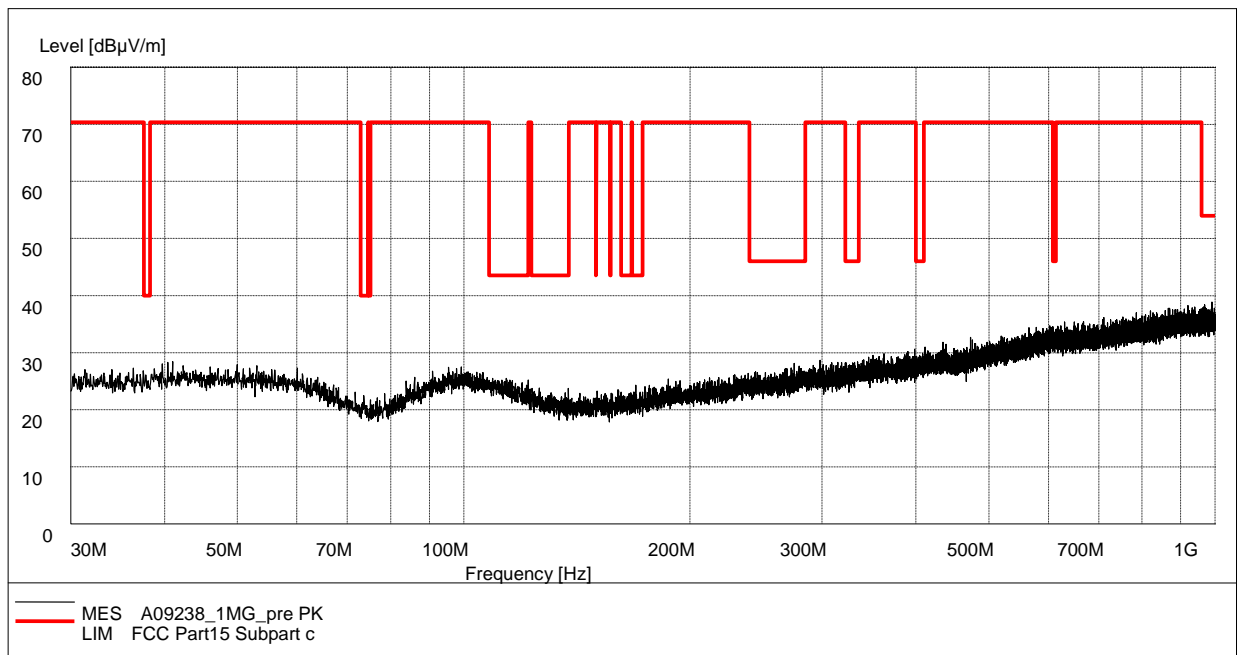

**Fig. 58 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)**

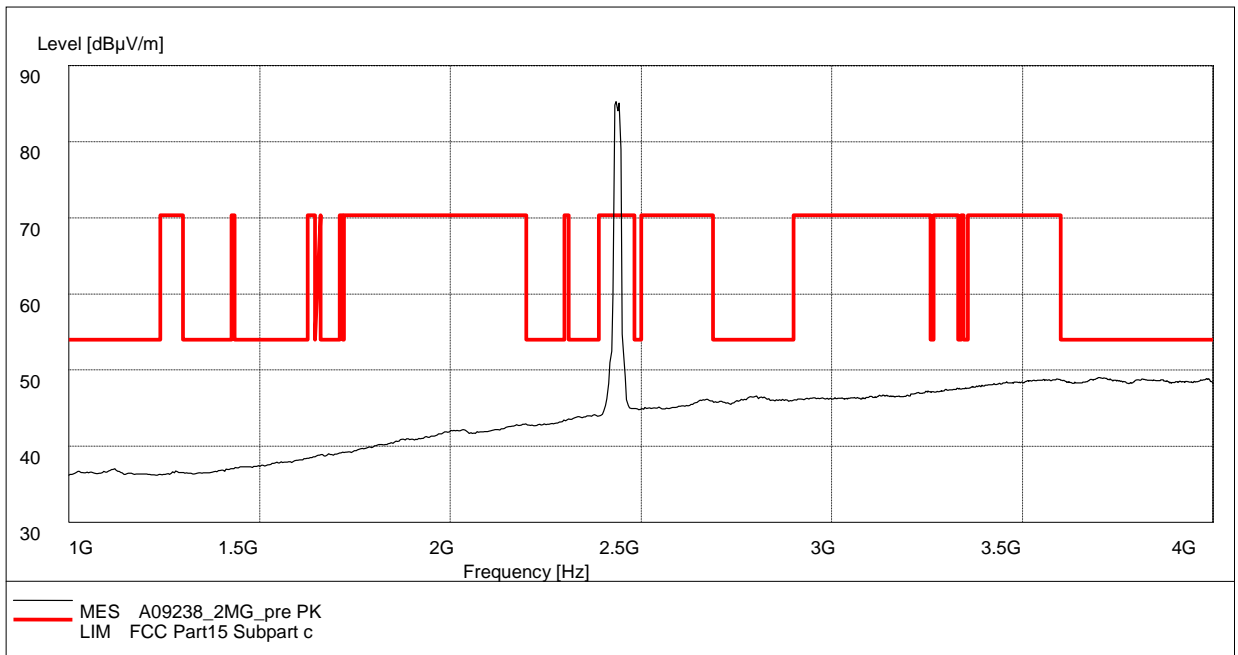


**Fig. 59 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)**

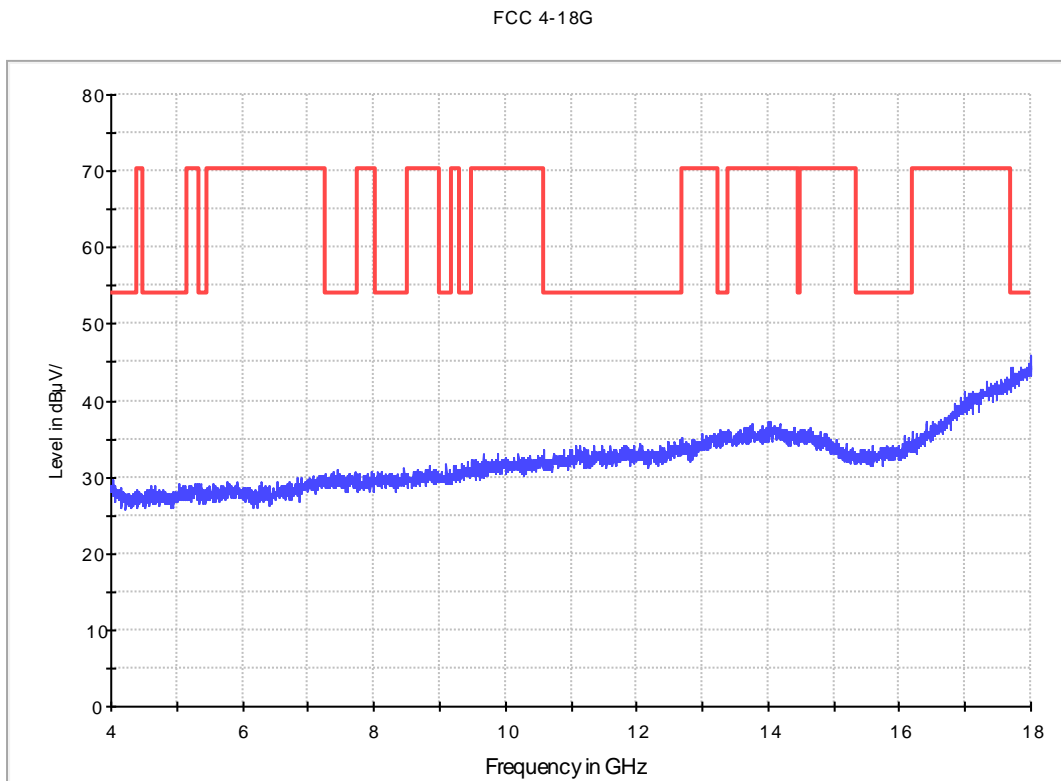


**Fig. 60 Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)**




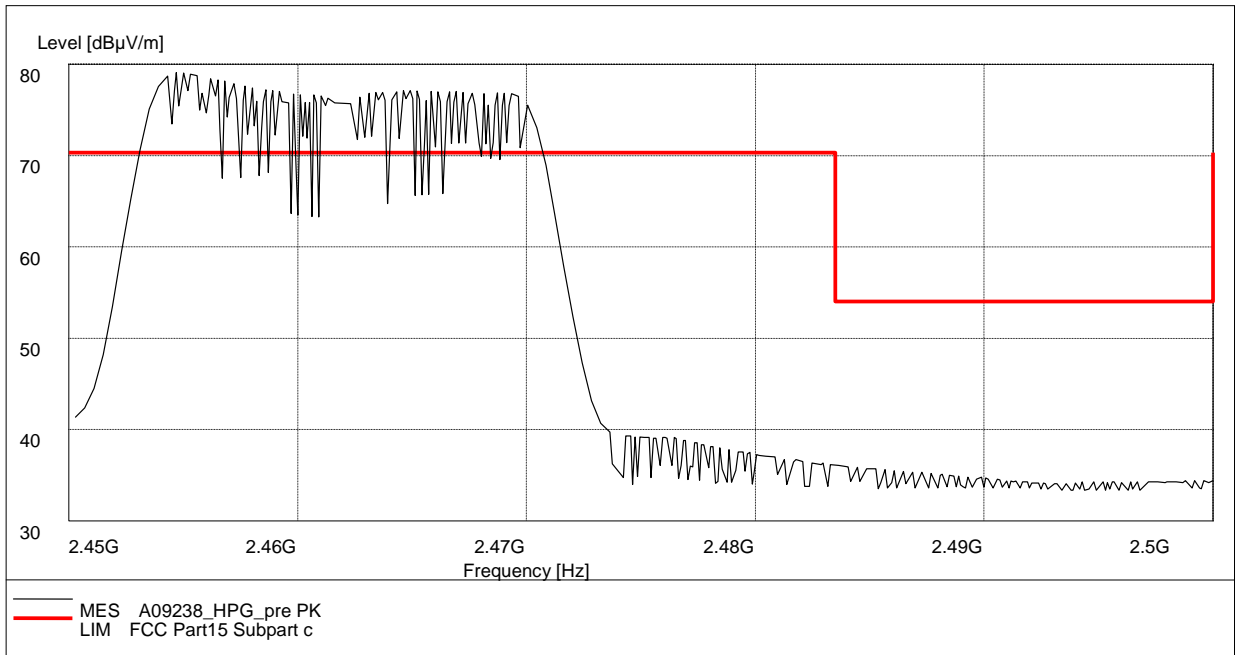


**Fig. 61 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

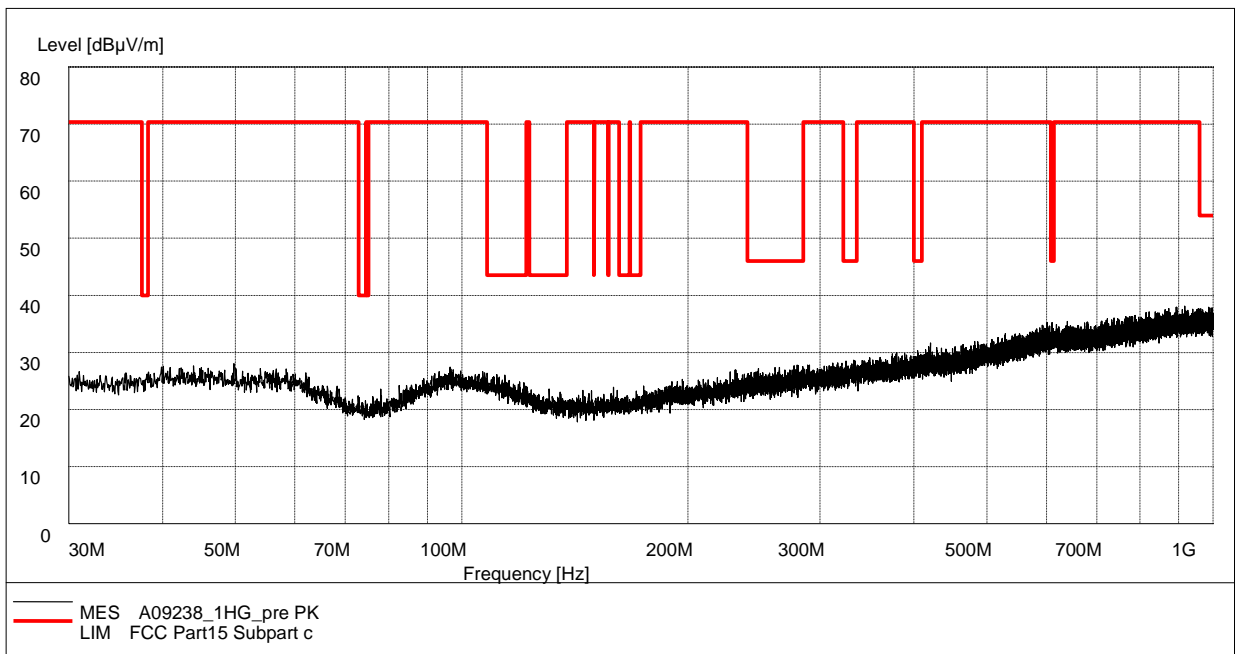


**Fig. 62 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)**

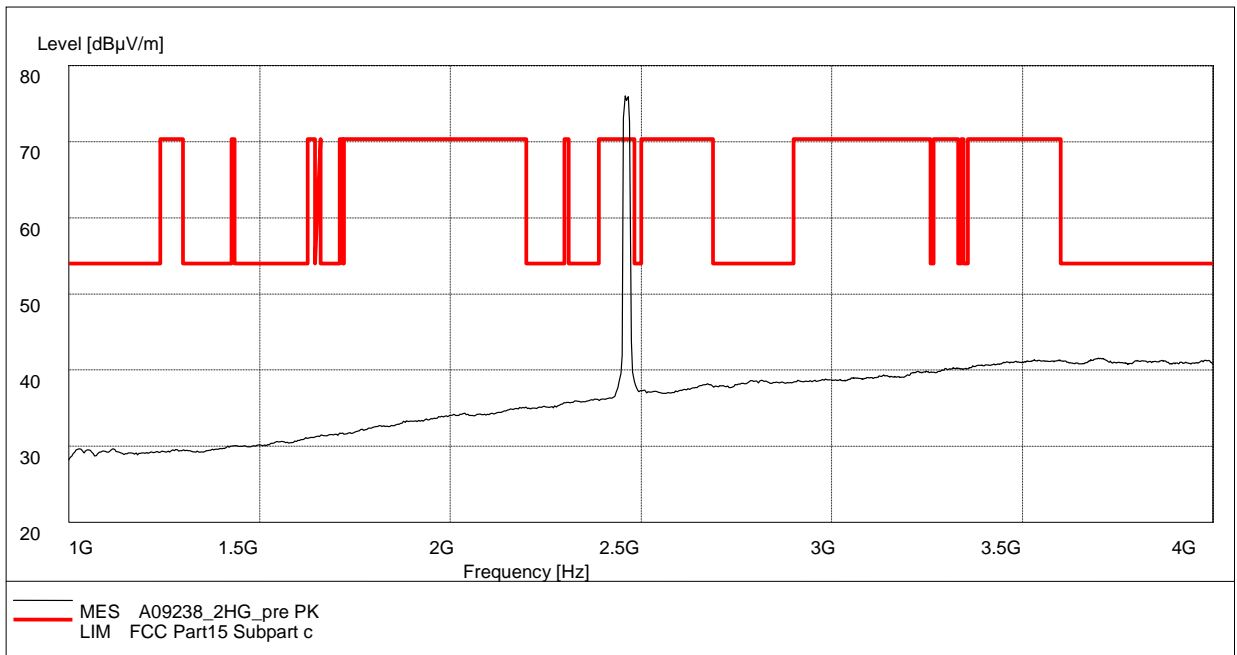


**Fig. 63 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)**

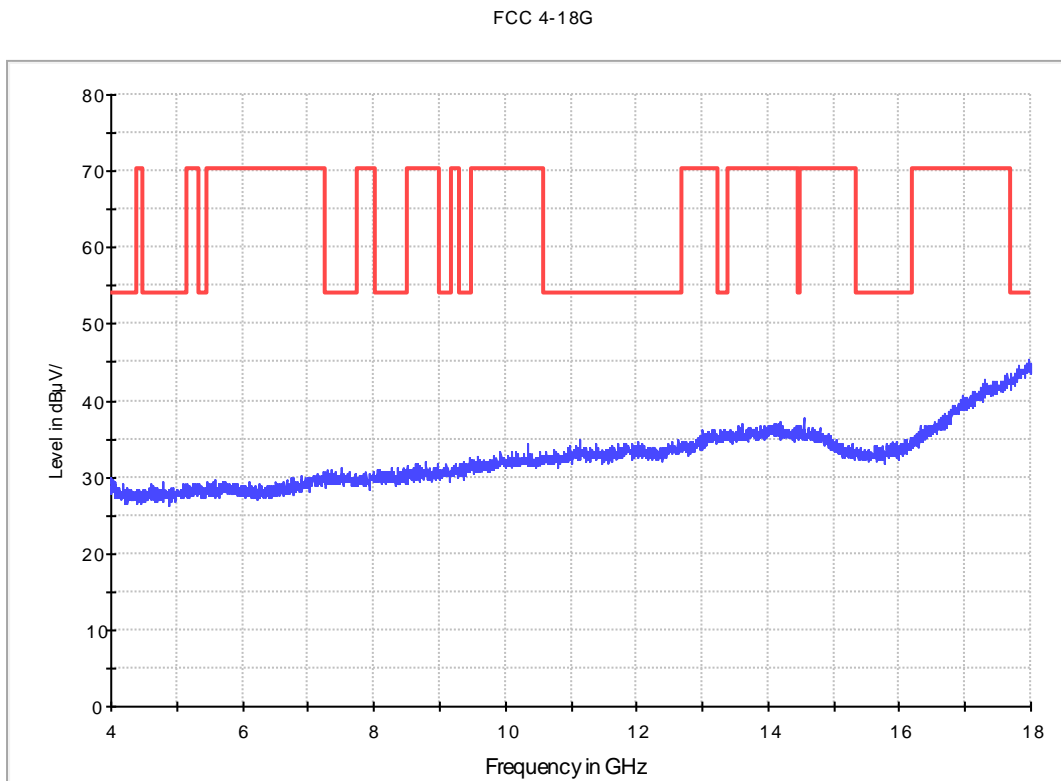


**Fig. 64 Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz)**

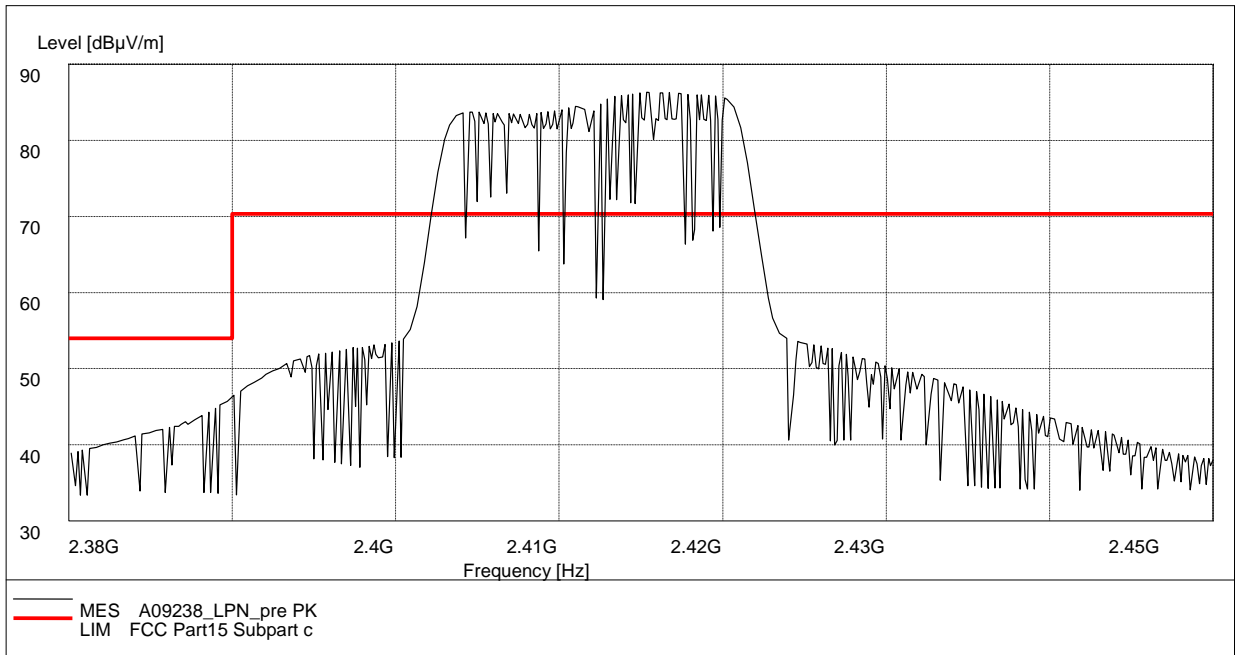


**Fig. 65 Radiated Spurious Emission (Power): 802.11n-20MHz, ch1, 2.38 GHz - 2.45GHz**

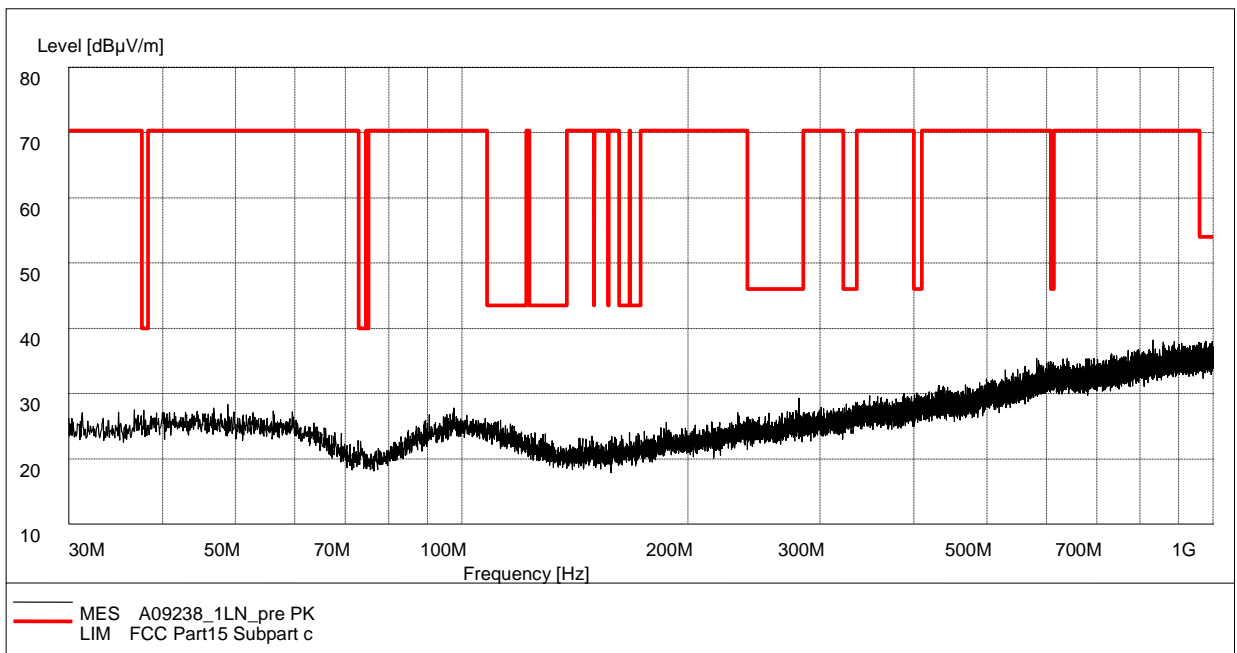


**Fig. 66 Radiated Spurious Emission (802.11n-20MHz, Ch1, 30 MHz-1 GHz)**

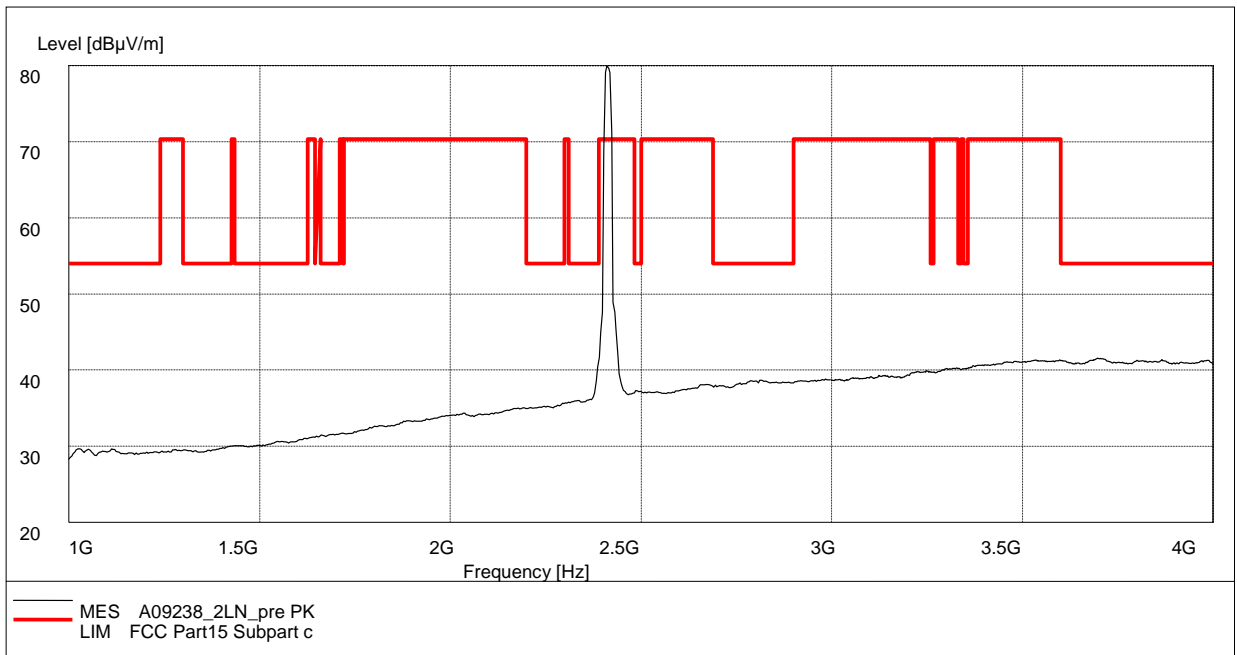


**Fig. 67 Radiated Spurious Emission (802.11n-20MHz, Ch1, 1 GHz-4 GHz)**

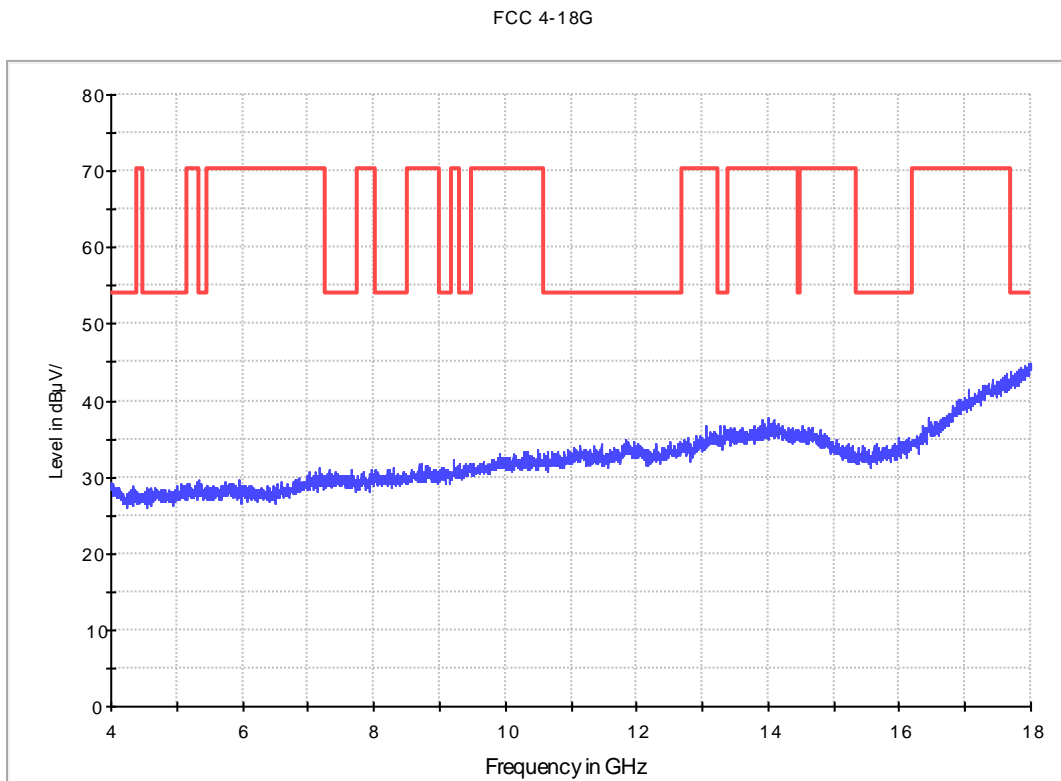

**Fig. 68 Radiated Spurious Emission (802.11n-20MHz, Ch1, 4 GHz-18 GHz)**

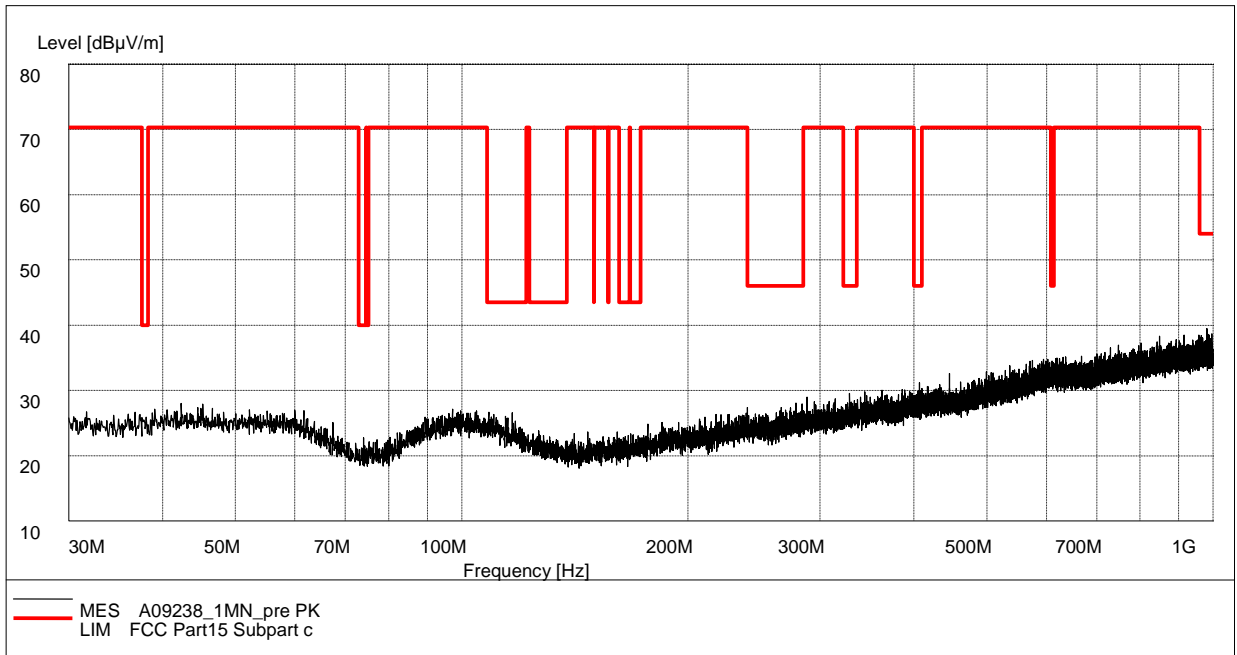


**Fig. 69 Radiated Spurious Emission (802.11n-20MHz, Ch6, 30 MHz-1 GHz)**

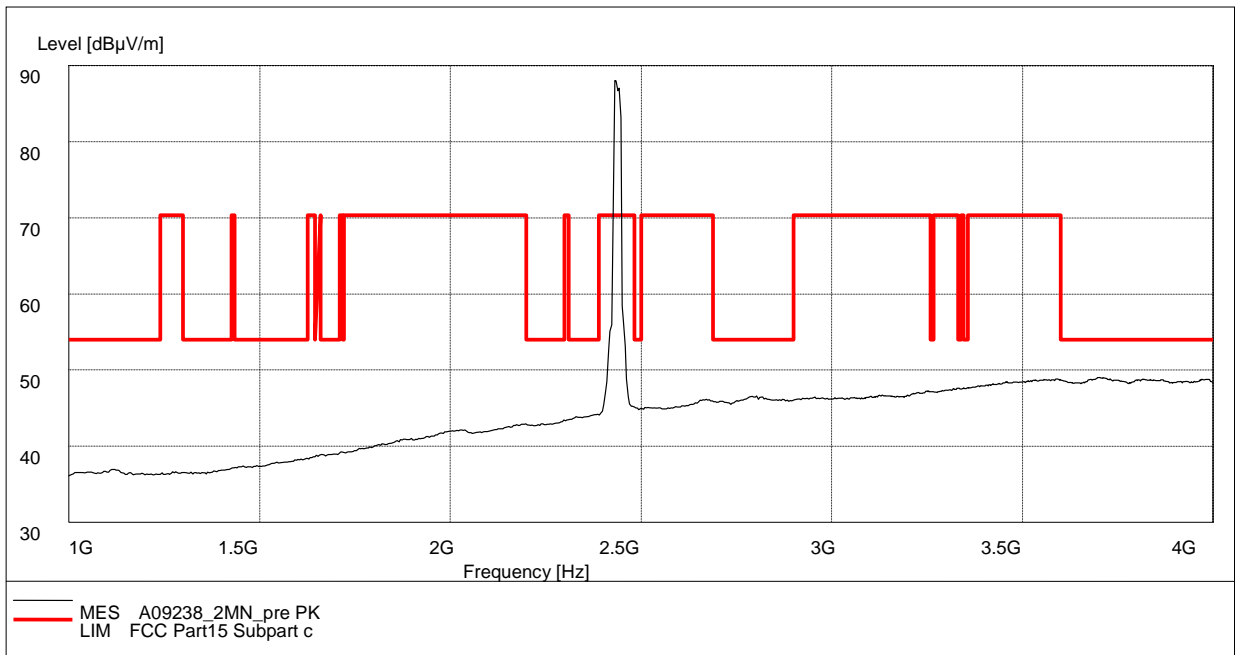


**Fig. 70 Radiated Spurious Emission (802.11n-20MHz, Ch6, 1 GHz-4 GHz)**


FCC 4-18G

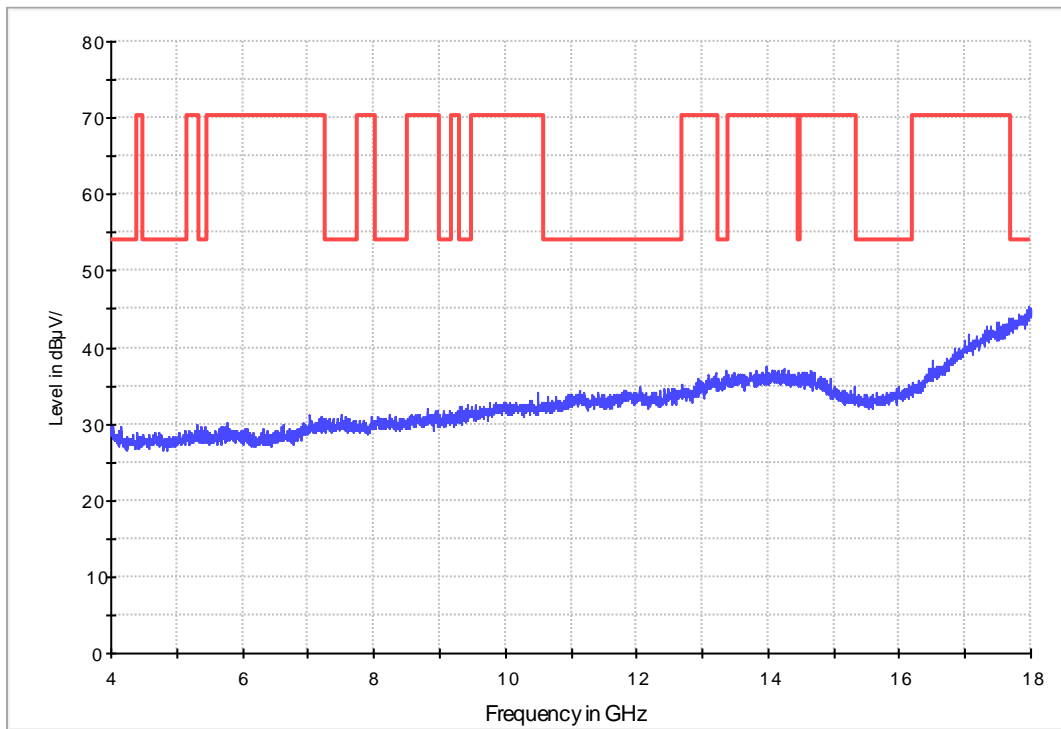


**Fig. 71 Radiated Spurious Emission (802.11n-20MHz, Ch6, 4 GHz-18 GHz)**

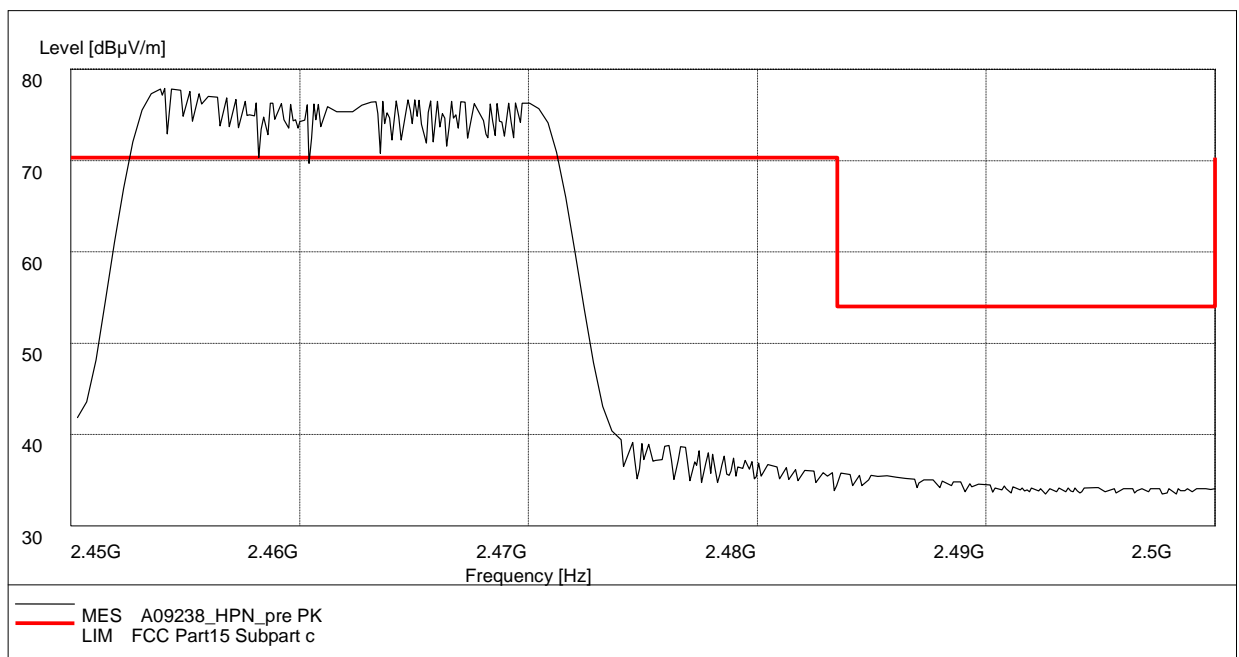

**Fig. 72 Radiated Spurious Emission (Power): 802.11n-20MHz, ch11, 2.45 GHz - 2.50GHz**

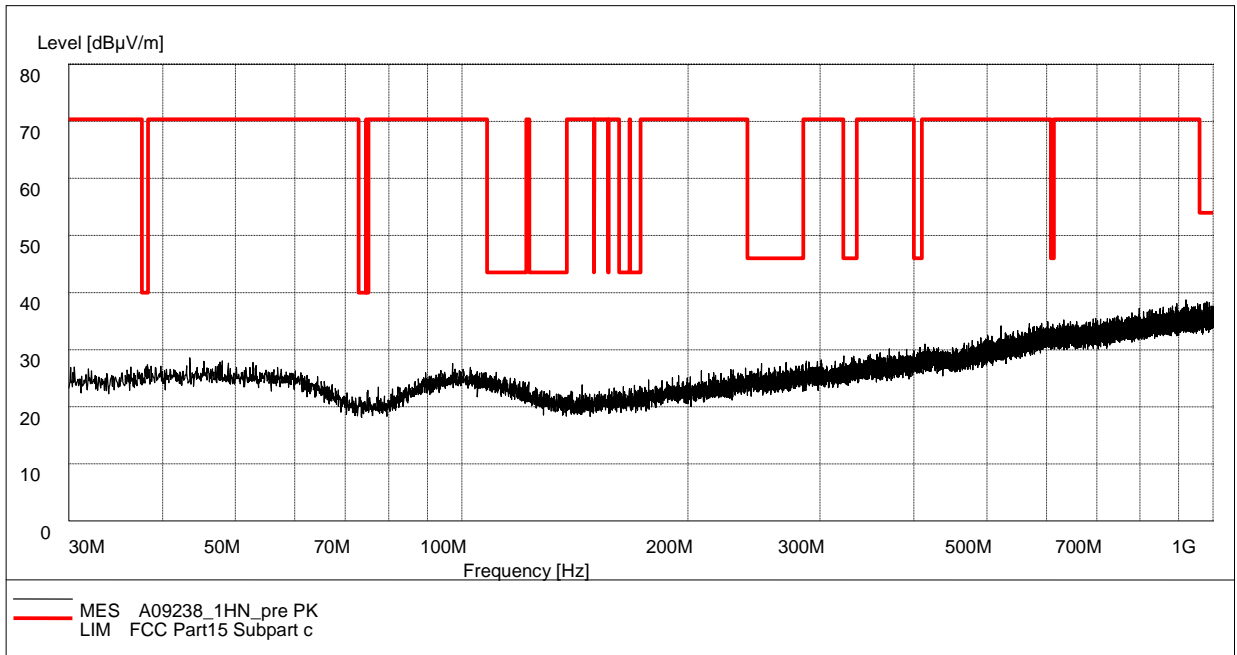


**Fig. 73 Radiated Spurious Emission (802.11n-20MHz, Ch11, 30 MHz-1 GHz)**

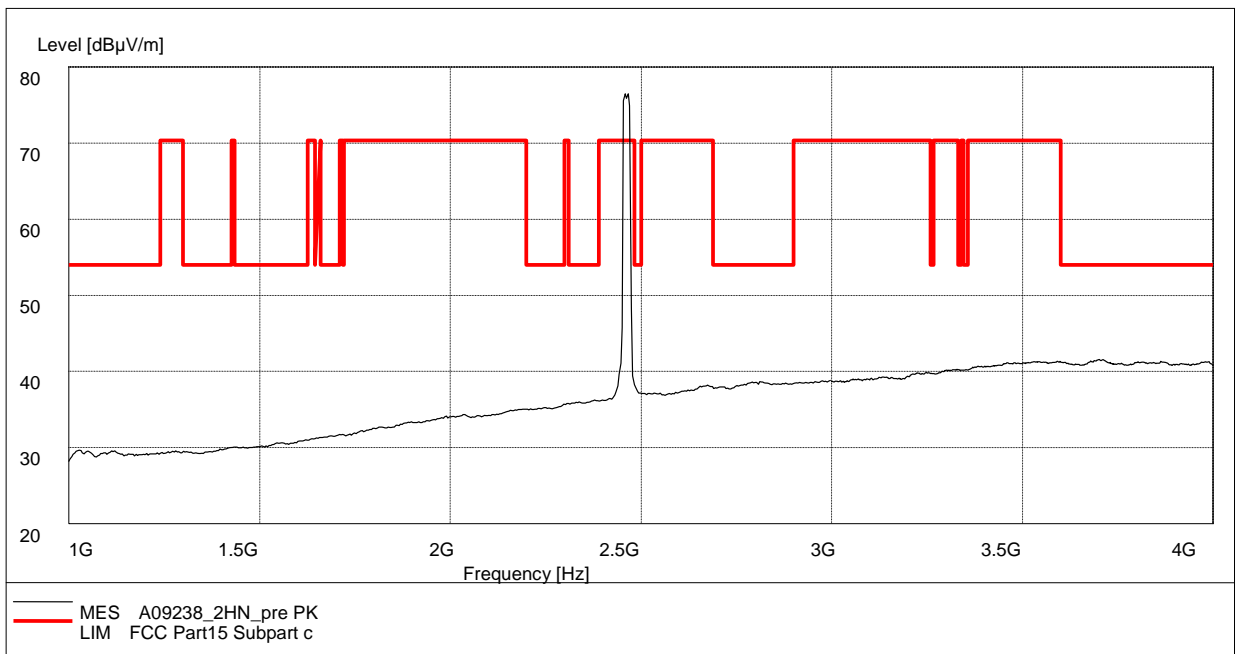


**Fig. 74 Radiated Spurious Emission (802.11n-20MHz, Ch11, 1 GHz-4 GHz)**

FCC 4-18G

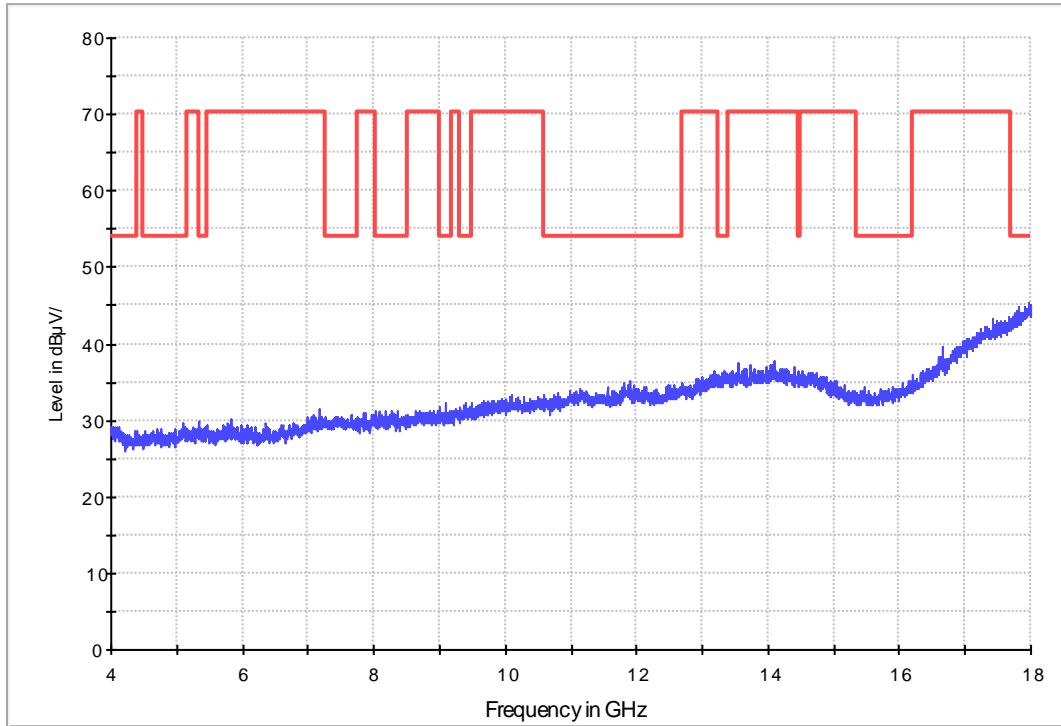

**Fig. 75 Radiated Spurious Emission (802.11n-20MHz, Ch11, 4 GHz-18 GHz)**

FCC 18-26.5G

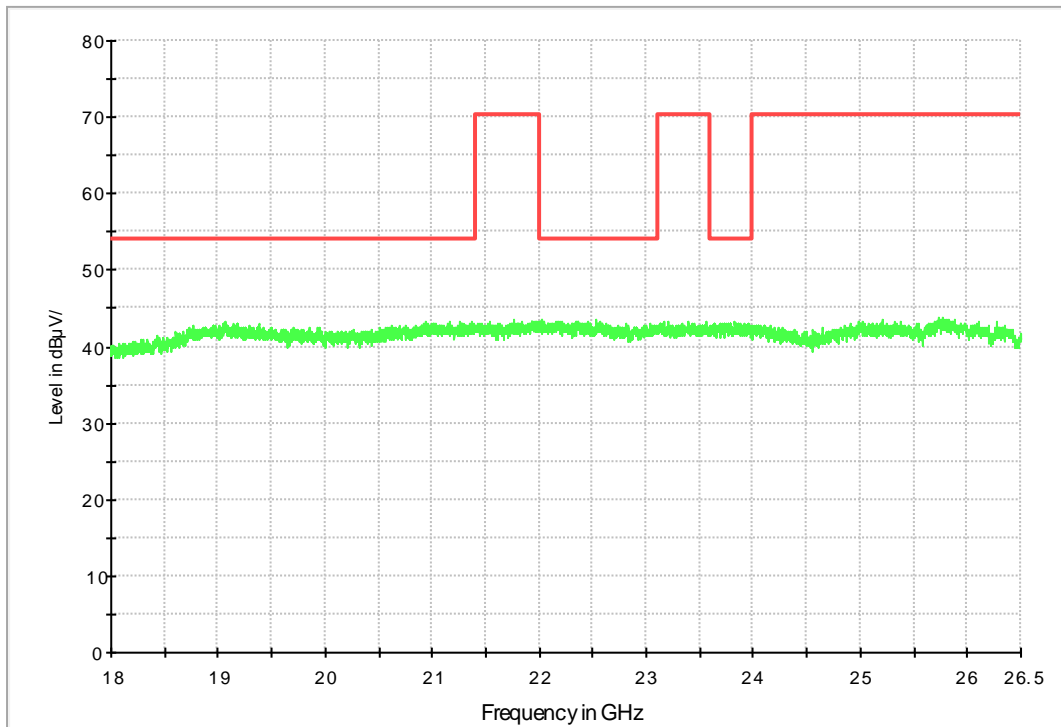

**Fig. 76 Radiated emission: 18 GHz - 26.5 GHz**



### A.7. AC Powerline Conducted Emission

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		11n mode	IDLE	
0.15 to 0.5	66 to 56	Fig. 77	Fig.78	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		11n mode	IDLE	
0.15 to 0.5	56 to 46	Fig.77	Fig.78	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074

**Conclusion: PASS**

**Test graphs as below:**

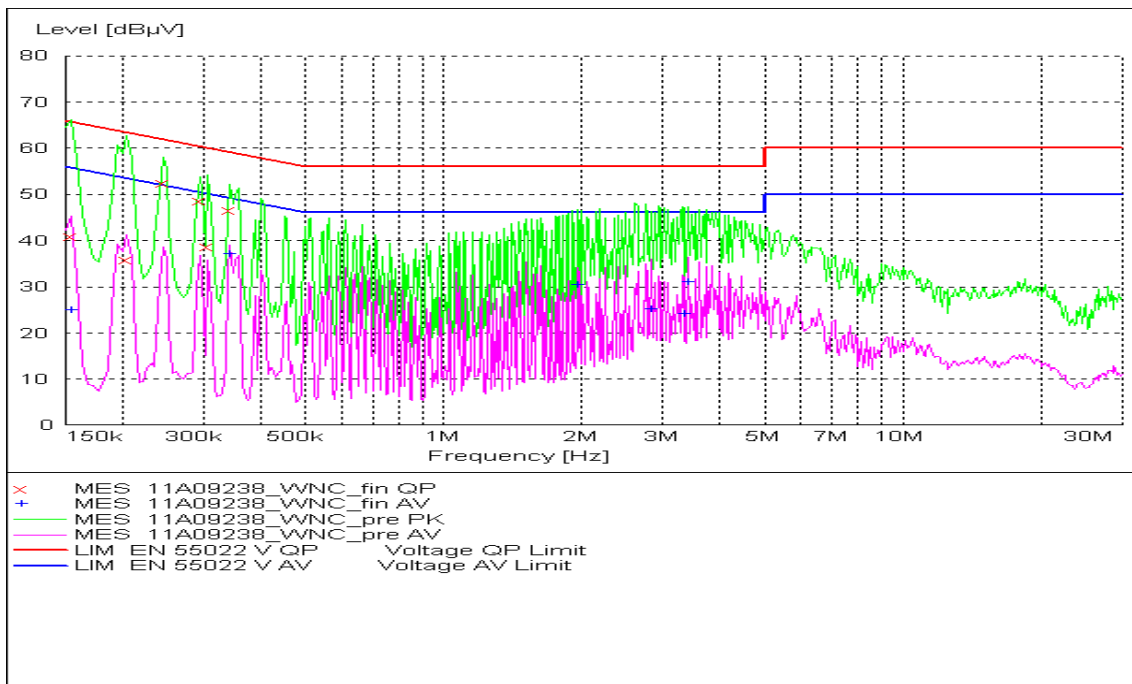



Fig. 77 AC Powerline Conducted Emission-802.11n

MEASUREMENT RESULT: "9238\_WNC\_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1545	40.9	10.2	66	24.8	L1	GND
0.204	35.8	10.2	63	27.7	N	GND
0.2445	52.5	10.2	62	9.4	N	GND
0.294	48.6	10.2	60	11.8	N	GND
0.3075	38.8	10.2	60	21.2	L1	GND
0.3435	46.6	10.2	59	12.5	N	GND

MEASUREMENT RESULT: "9238\_WNC\_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1545	25	10.2	56	30.7	L1	GND
0.3435	37.2	10.2	49	11.9	L1	GND
1.9635	30.5	10.2	46	15.5	N	GND
2.839837	25.2	10.2	46	20.8	N	GND
3.357102	24.1	10.2	46	21.9	N	GND
3.411031	31.1	10.2	46	14.9	L1	GND

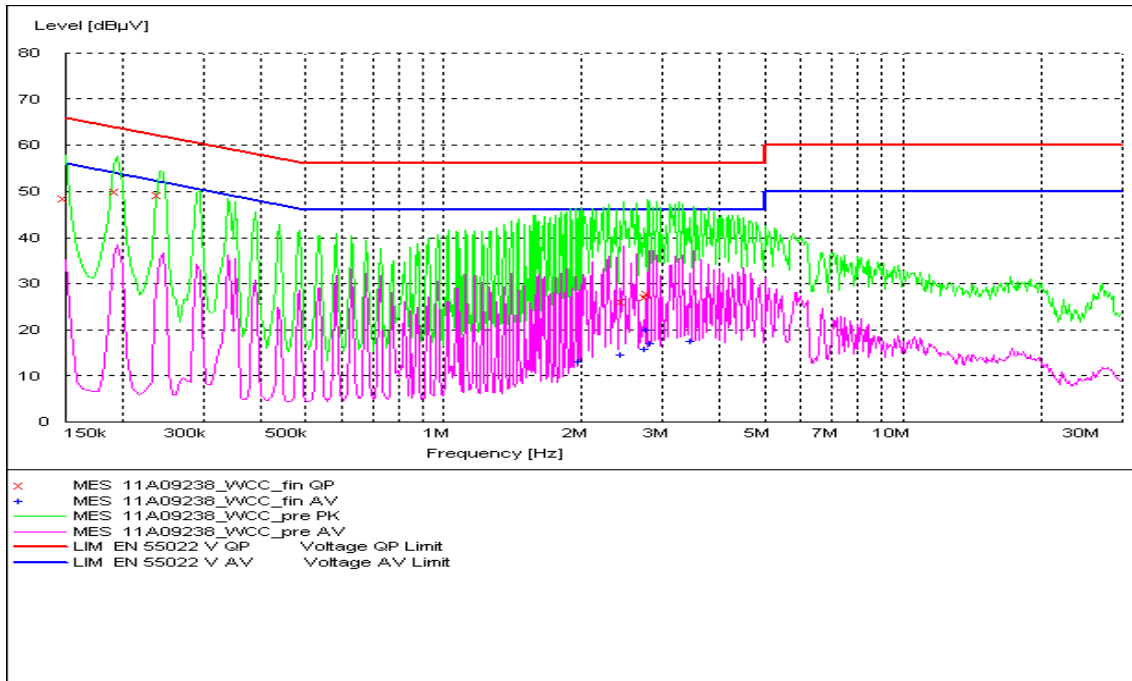

**Fig. 78 AC Powerline Conducted Emission-IDLE**

MEASUREMENT RESULT: "9238\_WCC\_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.15	48.6	10.2	66	17.4	N	GND
0.195	50.1	10.2	64	13.7	N	GND
0.24	49.3	10.2	62	12.8	N	GND
2.480072	26.1	10.2	56	29.9	N	GND
2.772757	27.1	10.2	56	28.9	L1	GND
2.817299	27.9	10.2	56	28.1	N	GND

MEASUREMENT RESULT: "9238\_WCC\_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
1.9905	13	10.2	46	33	N	GND
2.480072	14.6	10.2	46	31.4	N	GND
2.772757	15.8	10.2	46	30.2	N	GND
2.817299	19.9	10.2	46	26.1	N	GND
2.862556	17	10.2	46	29	N	GND
3.493552	17.5	10.2	46	28.5	N	GND

**Fig. 79 AC Powerline Conducted Emission-802.11n-20MHz**

MEASUREMENT RESULT: "5567\_MNC\_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.375	43.5	10.1	58	14.9	L1	GND
0.4605	37.9	10.1	57	18.8	L1	GND
0.537	38.4	10.1	56	17.6	L1	GND
1.392	33.2	10.1	56	22.8	L1	GND
1.9095	39.9	10.1	56	16.1	L1	GND
3.309804	38.4	10.1	56	17.6	L1	GND

MEASUREMENT RESULT: "5567\_MNC\_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.339	34.0	10.1	49	15.2	N	GND
0.3795	37.2	10.1	48	11.1	L1	GND
0.4155	32.7	10.1	48	14.8	N	GND
0.4605	30.8	10.1	47	15.9	L1	GND
0.5415	31.1	10.1	46	14.9	L1	GND
3.309804	28.6	10.1	46	17.4	L1	GND

### A.8. Occupied 20dB Bandwidth

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) A8.2	/

The measurement is made according to ANSI C63.4 and KDB558074

**Measurement Uncertainty:**

Measurement Uncertainty	60.80Hz
-------------------------	---------

**Measurement Result:**

**802.11b/g mode**


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.79	13269	P
	6	Fig.80	13205	P
	11	Fig.81	13269	P
802.11g	1	Fig.82	18590	P
	6	Fig.83	18590	P
	11	Fig.84	18526	P

**802.11n mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (20MHz)	1	Fig.85	19231	P
	6	Fig.86	18974	P
	11	Fig.87	19359	P
802.11n (40MHz)	/	/	/	/
	/	/	/	/
	/	/	/	/


**Conclusion: PASS**

**Test graphs as below:**

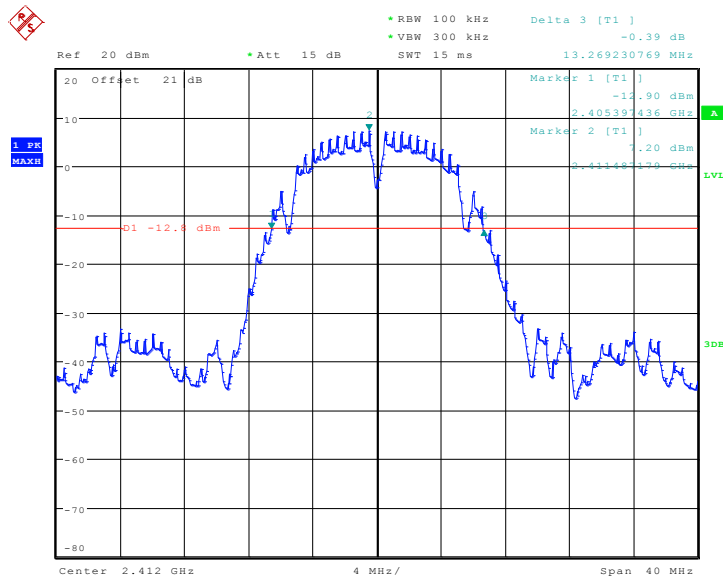


Date: 13.JUN.2003 11:11:58

**Fig. 80 Occupied 6dB Bandwidth (802.11b, Ch 1)**

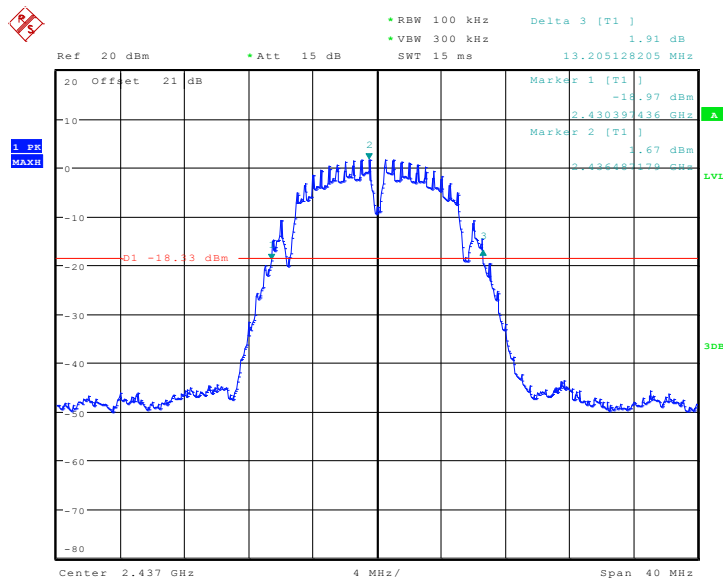


Date: 13.JUN.2003 11:14:26

**Fig. 81 Occupied 6dB Bandwidth (802.11b, Ch 6)**

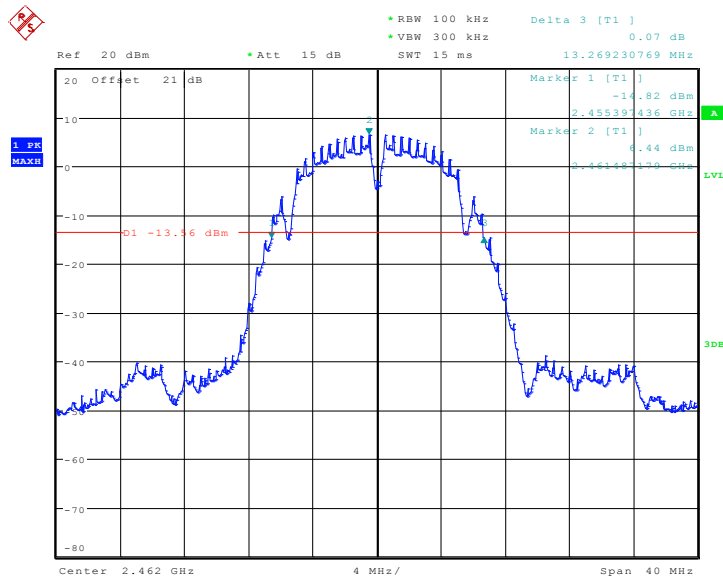


Date: 13.JUN.2003 11:16:34

**Fig. 82 Occupied 6dB Bandwidth (802.11b, Ch 11)**

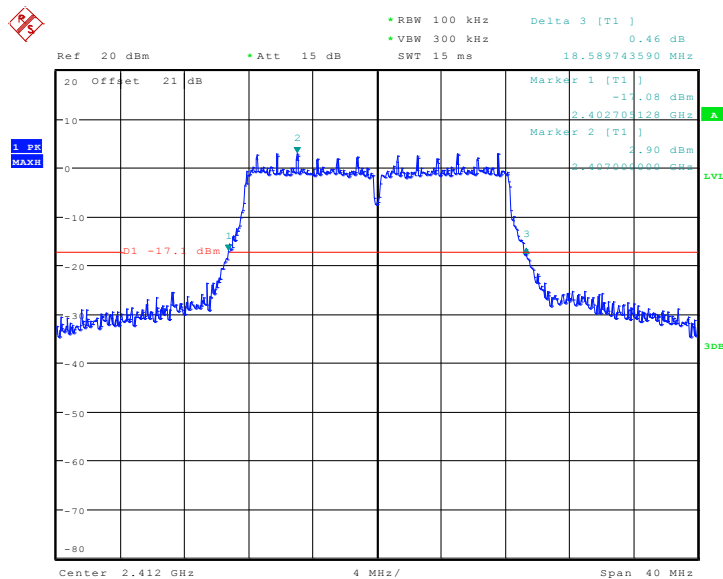


Date: 13.JUN.2003 11:18:36

**Fig. 83 Occupied 6dB Bandwidth (802.11g, Ch 1)**

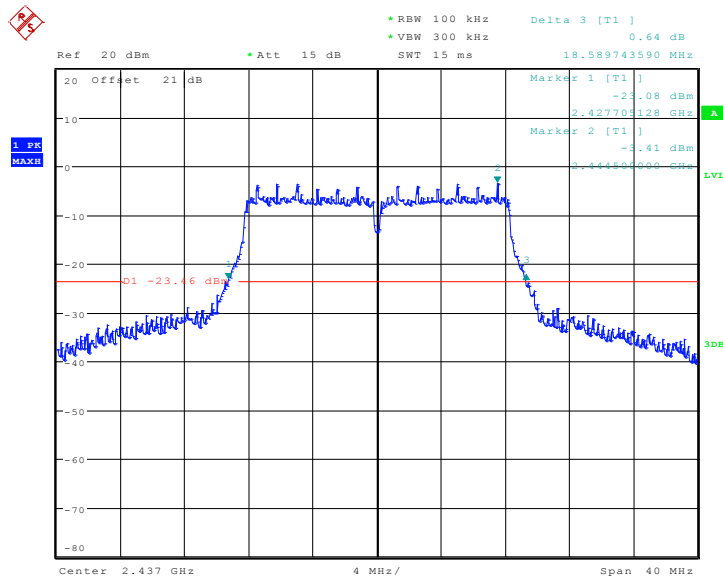

Date: 13.JUN.2003 11:20:28


**Fig. 84 Occupied 6dB Bandwidth (802.11g, Ch 6)**

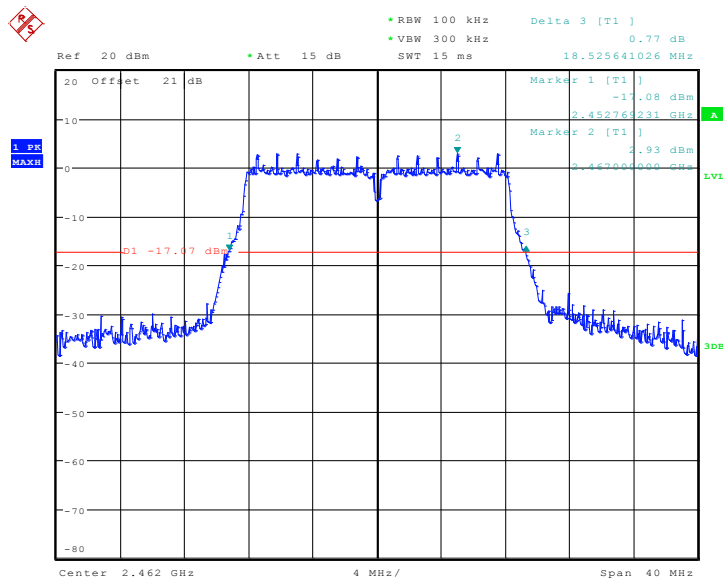

Date: 13.JUN.2003 11:22:26


**Fig. 85 Occupied 6dB Bandwidth (802.11g, Ch 11)**



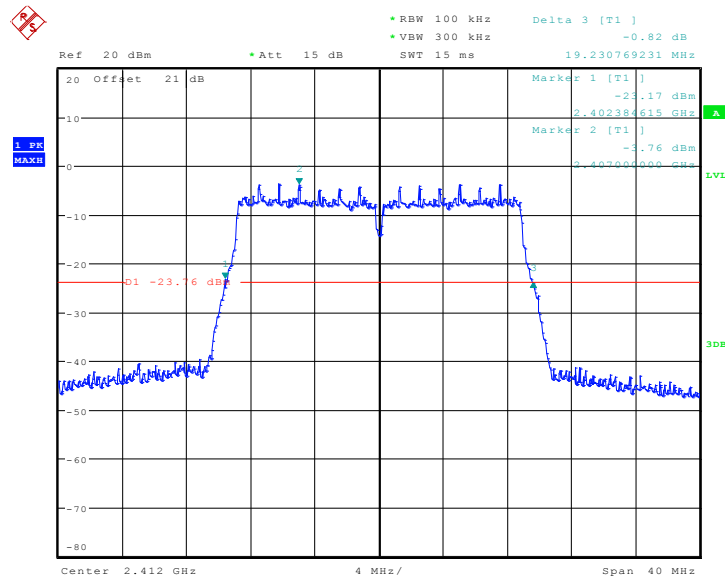


Date: 13.JUN.2003 11:24:25

Fig. 86 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 1)

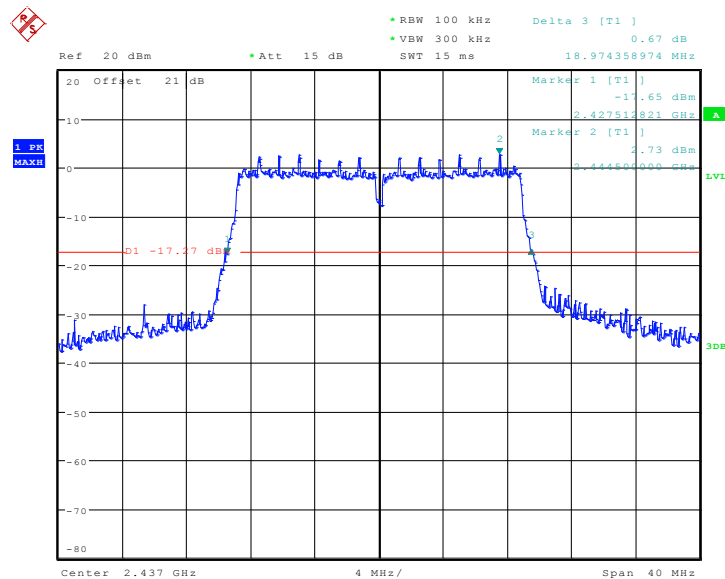

Date: 13.JUN.2003 11:26:07

Fig. 87 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 6)

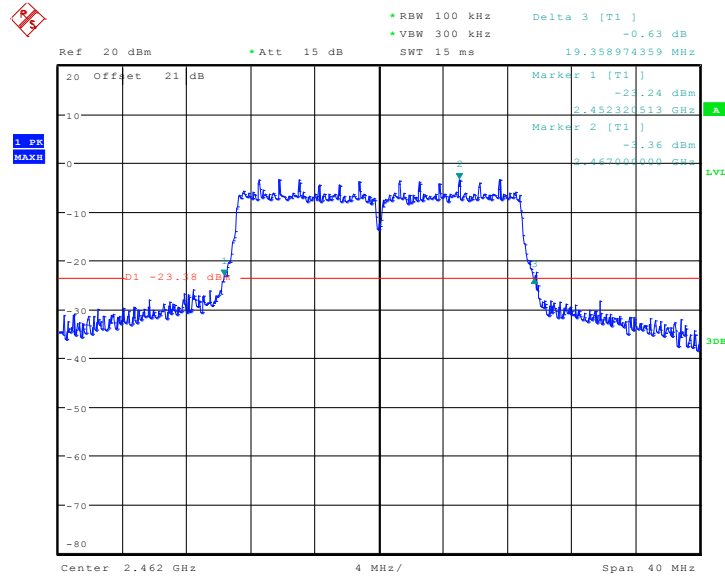

Date: 13.JUN.2003 11:28:02

**Fig. 88 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)**

**\*\*\* END OF REPORT BODY \*\*\***