



TEST REPORT

No. 2012TAR585

for

TCT Mobile Limited

UMTS Triband / GSM Quadband mobile phone

Model Name: MiniQ 3G AWS1

Marketing Name: ONE TOUCH 875T

FCC ID: RAD296

with

Hardware Version: PIO02

Software Version: G15

Issued Date: Jan. 8, 2013

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1 OUTPUT POWER	11
A.2 EMISSION LIMIT.....	17
A.3 CONDUCTED EMISSION	24
A.4 FREQUENCY STABILITY	33
A.5 OCCUPIED BANDWIDTH	36
A.6 EMISSION BANDWIDTH	42
A.7 BAND EDGE COMPLIANCE.....	48
A.8 CONDUCTED SPURIOUS EMISSION	51

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Dec. 21, 2012
Testing End Date: Jan. 7, 2013

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	UMTS Triband / GSM Quadband mobile phone
Model Name	MiniQ 3G AWS1
Marketing Name	ONE TOUCH 875T
FCC ID	RAD296
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA Band II;WCDMA Band IV;WCDMA Band V
Antenna	Internal or external
Power supply	Battery or Charger (AC Adaptor)
Output power	25.82dBm maximum EIRP measured for WCDMA Band IV
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N05	013337000009788	PIO02	G15
N11	013337000009812	PIO02	G15
N12	013337000008129	PIO02	G15
N13	013337000009424	PIO02	G15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Battery
AE3	Charger
AE4	Charger

AE1

Model	CAB3120000C1
Manufacturer	BYD
Capacitance	850mAh
Nominal Voltage	3.7V

AE2

Model	CAB3120000C3
-------	--------------

Manufacturer	BAK
Capacitance	850mAh
Nominal Voltage	3.7V

AE3

Model	CBA3002AG0C1
Manufacturer	BYD
Length of DC line	125cm

AE4

Model	CBA3002AG0C3
Manufacturer	Yingju
Length of DC line	125cm

*AE ID: is used to identify the test sample in the lab internally..

3.4. General Description

The Equipment Under Test (EUT) is a model of UMTS Triband / GSM Quadband mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	V 10.1.09
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	2011

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(c)/27.50(d)(2)	P
2	Emission Limit	2.1051/22.917/24.238/27.53(h)	P
3	CONDUCTED EMISSION	15.107/15.207	P
4	Frequency Stability	2.1055/24.235/ 27.54	P
5	Occupied Bandwidth	2.1049(h)(i)	P
6	Emission Bandwidth	22.917(b)/24.238(b)/ 27.53(g)	P
7	Band Edge Compliance	22.917(b)/24.238(b)/ 27.53(g)	P
8	Conducted Spurious Emission	2.1057/22.917/24.238/ 27.53(g)	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2013-03-28
2	Test Receiver	ESU26	100376	R&S	2013-11-08
3	BiLog Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
4	BiLog Antenna	3117	00139065	ETS-Lindgren	2014-07-31
5	Signal Generator	SMB100A	102063	R&S	2013-04-05
6	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
7	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-06
8	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2013-03-16
9	Spectrum Analyzer	E4440A	MY48250642	Agilent	2013-03-04
10	EMI Antenna	9117	177	Schwarzbeck	2013-06-28
11	EMI Antenna	VULB 9163	482	Schwarzbeck	2014-02-17
12	EMI Antenna	3117	00119024	ETS-Lindgren	2014-02-02
13	EMI Antenna	3117	00058889	ETS-Lindgren	2014-02-02
14	Signal Generator	N5183A	MY49060052	Agilent	2013-03-19
15	Climatic chamber	PL-2G	343074	ESPEC	2013-05-12
16	Spectrum Analyzer	FSU26	200030	R&S	2013-06-19

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (RMS) These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II;826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V and 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV(bottom, middle and top of operational frequency range).

Limit

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

WCDMA Band II

Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	output power(dBm)
	9262	1852.4	23.32
	9400	1880.0	23.36
	9538	1907.6	23.17

WCDMA Band V

Measurement result

WCDMA (Band V)	CH	Frequency(MHz)	output power(dBm)
	4132	826.4	23.18
	4183	836.6	23.06
	4233	846.6	23.01

WCDMA Band IV

Measurement result

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band IV)	1312	1712.4	23.46
	1450	1740.0	23.45
	1513	1752.6	23.40

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts." Rule Part 27.50(d)(2) specifies, "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

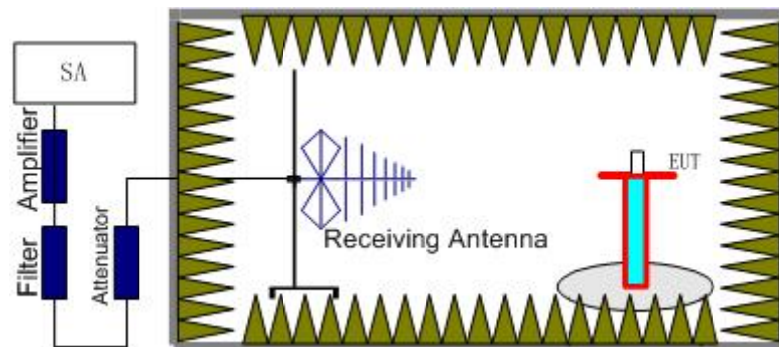

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

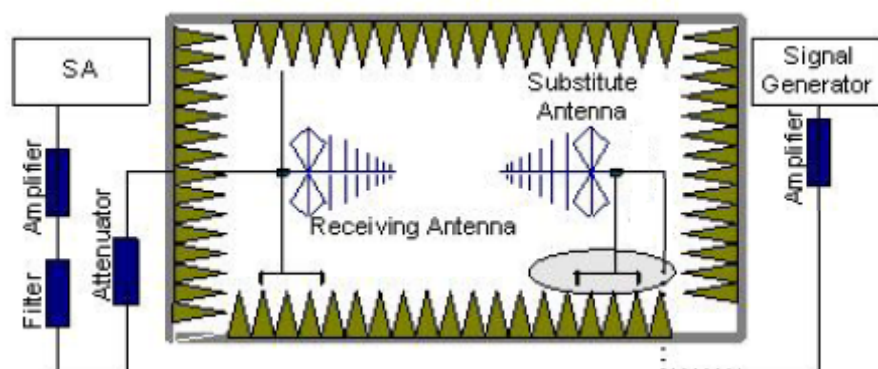

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

WCDMA Band II-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	33dBm (2W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Polarization
1852.40	-27.00	3.18	-50.00	-4.55	24.37	V
1880.00	-27.76	3.11	-50.00	-4.43	23.56	V
1907.60	-26.37	3.18	-50.00	-4.31	24.76	H

Frequency: 1907.60MHz

Peak EIRP(dBm)= P_{Mea}(-26.37dBm)- P_{cl}(3.18dB)- P_{Ag}(-50.00dB) - G_a (-4.31dB) =24.76dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

WCDMA Band V-ERP

Limits

	Burst Peak ERP (dBm)
WCDMA Band V	38.45dBm (7W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
826.40	-38.42	2.07	-53.00	0.85	2.15	9.51	V
836.60	-38.99	2.08	-53.00	0.90	2.15	8.88	V
846.60	-38.43	2.09	-53.00	0.94	2.15	9.39	H

Frequency: 826.40MHz

Peak ERP(dBm)= P_{Mea}(-38.42dBm)- P_{cl}(2.07dB)- P_{Ag}(-53.00dB)-G_a (0.85dB)-2.15dB=9.51dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

WCDMA Band IV-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	30dBm (2W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Polarization
1712.40	-28.22	2.97	-50.00	-5.17	23.98	H
1740.00	-27.24	2.99	-50.00	-5.04	24.81	H
1752.60	-26.16	3.01	-50.00	-4.99	25.82	H

Frequency: 1752.60MHz

Peak EIRP(dBm)= P_{Mea}(-26.16dBm)- P_{cl}(3.01dB)- P_{Ag}(-50.00dB) - G_a (-4.99dB) =25.82dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

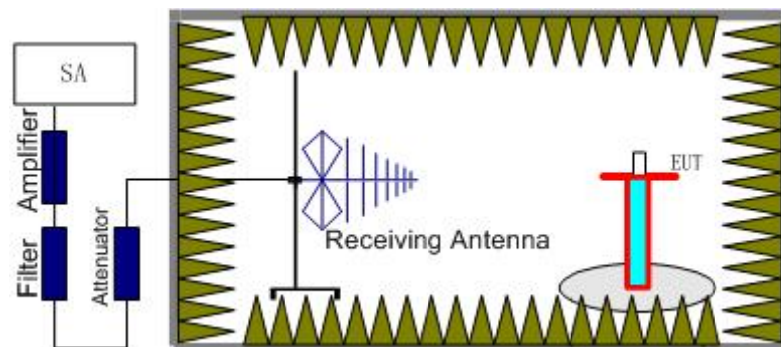

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

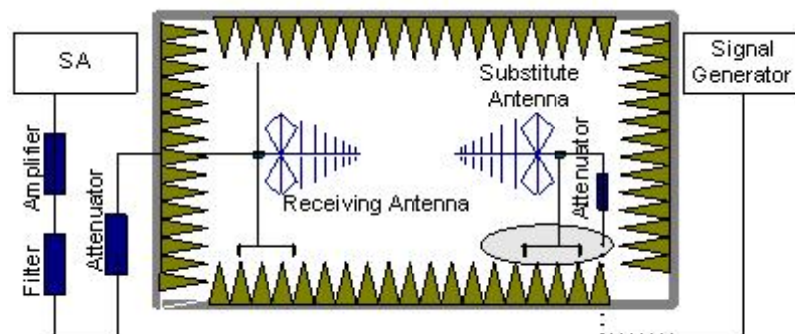

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238 , Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) , WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
WCDMA Band IV	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4019.42	-66.89	4.66	-8.51	-63.04	-13.00	V
5537.57	-68.07	5.46	-10.02	-63.51	-13.00	V
8501.91	-64.84	7.01	-12.20	-59.65	-13.00	V
10268.39	-63.24	7.59	-12.45	-58.38	-13.00	V
16219.37	-61.64	10.02	-12.74	-58.92	-13.00	V
17615.84	-61.48	10.68	-13.37	-58.79	-13.00	V

WCDMA BAND II Mode Channel 9400/1880MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3821.88	-64.61	4.50	-8.29	-60.82	-13.00	H
6981.43	-66.18	6.25	-11.08	-61.35	-13.00	H
8969.54	-64.69	7.27	-12.58	-59.38	-13.00	H
10175.70	-64.71	7.76	-12.44	-60.03	-13.00	H
12348.07	-65.31	8.70	-12.64	-61.37	-13.00	V
15527.18	-60.84	9.95	-13.38	-57.41	-13.00	V

WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3811.79	-68.93	4.48	-8.27	-65.14	-13.00	V
5145.18	-67.13	5.24	-9.79	-62.58	-13.00	H
6603.05	-69.11	6.10	-10.70	-64.51	-13.00	H
9552.43	-69.61	7.78	-12.58	-64.81	-13.00	H
12173.39	-63.48	8.85	-12.57	-59.76	-13.00	V
16004.38	-61.69	10.47	-12.99	-59.17	-13.00	V

WCDMA BAND V Mode Channel 4132/826.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1387.61	-67.31	2.68	-5.04	2.15	-67.10	-13.00	H
2198.35	-61.49	3.38	-4.50	2.15	-62.52	-13.00	V
3709.36	-67.66	4.41	-8.15	2.15	-66.07	-13.00	H
4995.98	-68.30	5.17	-9.69	2.15	-65.93	-13.00	H
6850.30	-67.27	6.16	-10.95	2.15	-64.63	-13.00	H
8009.69	-66.16	6.88	-11.91	2.15	-63.28	-13.00	H

WCDMA BAND V Mode Channel 4183/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1671.45	-58.63	2.98	-5.35	2.15	-58.41	-13.00	V
2236.38	-58.31	3.44	-4.61	2.15	-59.29	-13.00	V
3467.16	-68.22	4.24	-7.82	2.15	-66.79	-13.00	V
4640.10	-65.53	4.95	-9.05	2.15	-63.58	-13.00	H
6963.40	-67.10	6.25	-11.06	2.15	-64.44	-13.00	V
8632.41	-65.71	7.37	-12.31	2.15	-62.92	-13.00	H

WCDMA BAND V Mode Channel 4233/846.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1690.80	-52.81	2.95	-5.26	2.15	-52.65	-13.00	V
2327.24	-57.53	3.50	-4.88	2.15	-58.30	-13.00	H
3837.39	-70.43	4.54	-8.30	2.15	-68.82	-13.00	V
5009.82	-66.14	5.17	-9.71	2.15	-63.75	-13.00	H
6261.07	-65.94	5.83	-10.41	2.15	-63.51	-13.00	H
7174.27	-65.21	6.36	-11.20	2.15	-62.52	-13.00	V

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4021.94	-70.63	4.67	-8.51	-66.79	-13.00	V
5296.20	-70.27	5.37	-9.88	-65.76	-13.00	V
6583.11	-67.15	6.12	-10.68	-62.59	-13.00	H
8608.77	-67.16	7.49	-12.29	-62.36	-13.00	V
10228.65	-62.86	7.50	-12.45	-57.91	-13.00	V
13178.29	-64.73	9.28	-13.48	-60.53	-13.00	H

WCDMA BAND IV Mode Channel 1450/1740MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
3403.08	-68.69	4.20	-7.67	-65.22	-13.00	H
5121.36	-68.97	5.24	-9.77	-64.44	-13.00	V
7483.99	-67.62	6.57	-11.39	-62.80	-13.00	H
10115.35	-66.40	8.12	-12.42	-62.10	-13.00	H
12456.11	-61.63	8.75	-12.68	-57.70	-13.00	H
14436.62	-61.73	9.34	-13.65	-57.42	-13.00	V

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
4033.35	-69.61	4.68	-8.52	-65.77	-13.00	V
5422.03	-67.30	5.40	-9.95	-62.75	-13.00	H
7128.56	-69.30	6.43	-11.18	-64.55	-13.00	V
8952.73	-65.86	7.34	-12.56	-60.64	-13.00	V
11468.93	-63.59	8.63	-12.40	-59.82	-13.00	V
13205.01	-64.41	9.17	-13.51	-60.07	-13.00	V

A.3 CONDUCTED EMISSION

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result

WCDMA Band II-AE3

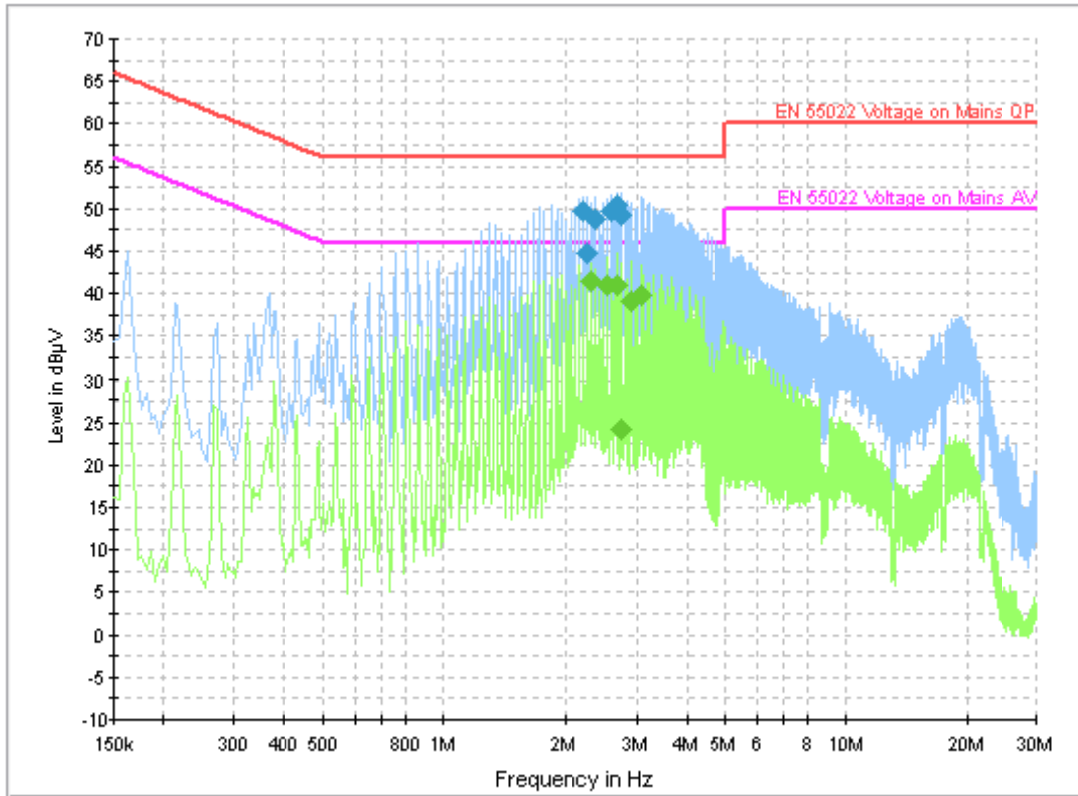


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.211000	49.8	GND	L1	10.0	6.2	56.0
2.269500	44.8	GND	L1	10.0	11.2	56.0
2.373000	48.8	GND	L1	10.0	7.2	56.0
2.589000	49.7	GND	L1	10.0	6.3	56.0
2.697000	50.4	GND	L1	10.0	5.6	56.0
2.751000	49.2	GND	L1	10.0	6.8	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.319000	41.4	GND	L1	10.0	4.6	46.0
2.535000	41.0	GND	L1	10.0	5.0	46.0
2.697000	41.0	GND	L1	10.0	5.0	46.0
2.751000	24.2	GND	L1	10.0	21.8	46.0
2.913000	39.2	GND	L1	10.0	6.8	46.0
3.075000	39.8	GND	L1	10.0	6.2	46.0

WCDMA Band V-AE3

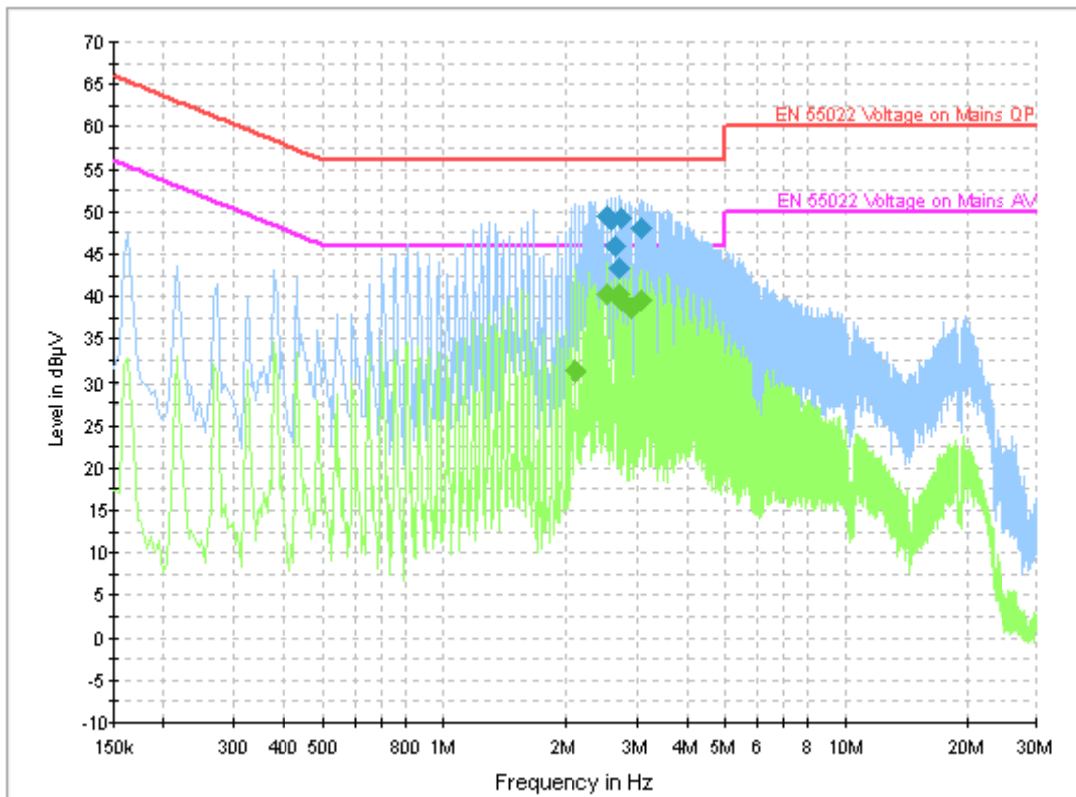


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.539500	49.4	GND	L1	10.0	6.6	56.0
2.593500	49.1	GND	L1	10.0	6.9	56.0
2.652000	46.0	GND	L1	10.0	10.0	56.0
2.706000	43.3	GND	L1	10.0	12.7	56.0
2.755500	49.2	GND	L1	10.0	6.8	56.0
3.079500	48.0	GND	L1	10.0	8.0	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.112000	31.4	GND	L1	10.0	14.6	46.0
2.539500	40.2	GND	L1	10.0	5.8	46.0
2.701500	40.4	GND	L1	10.0	5.6	46.0
2.755500	39.5	GND	L1	10.0	6.5	46.0
2.917500	38.6	GND	L1	10.0	7.4	46.0
3.079500	39.6	GND	L1	10.0	6.4	46.0

WCDMA Band IV-AE3

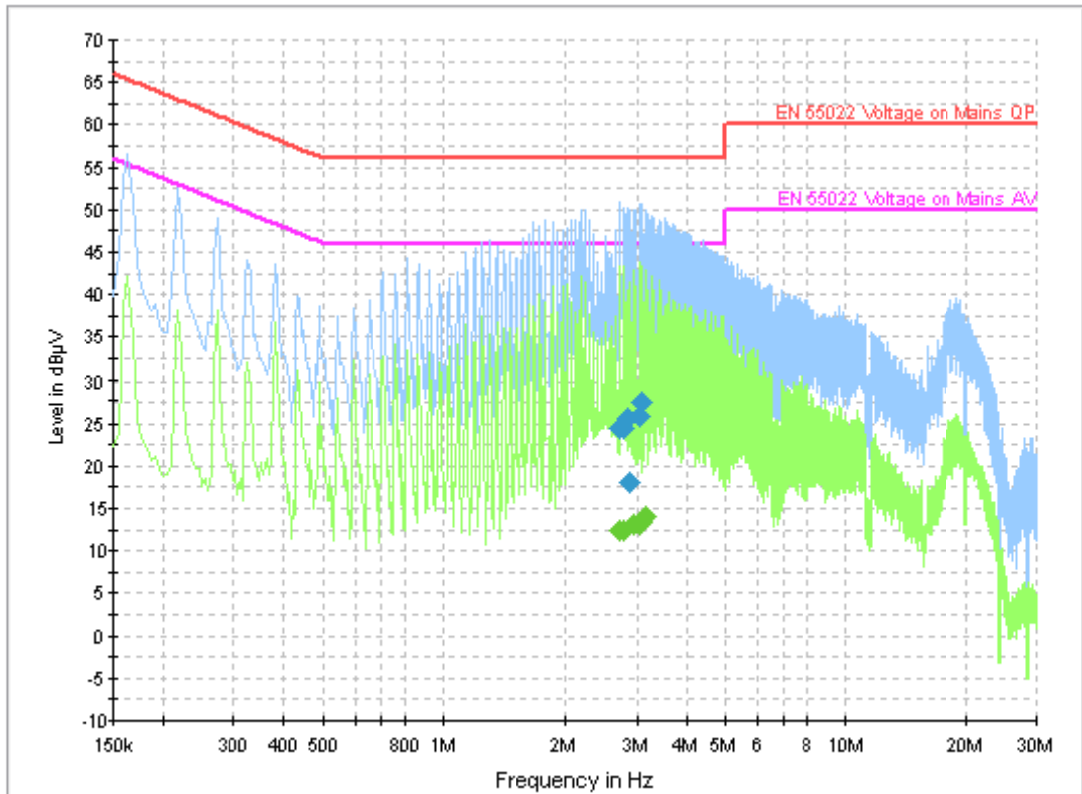


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.719500	24.5	GND	L1	10.0	31.5	56.0
2.769000	24.4	GND	L1	10.0	31.6	56.0
2.827500	25.6	GND	L1	10.0	30.4	56.0
2.877000	18.1	GND	N	10.0	37.9	56.0
3.043500	26.0	GND	L1	10.0	30.0	56.0
3.097500	27.5	GND	L1	10.0	28.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.719500	12.3	GND	L1	10.0	33.7	46.0
2.769000	12.5	GND	L1	10.0	33.5	46.0
2.931000	13.0	GND	L1	10.0	33.0	46.0
3.043500	13.2	GND	L1	10.0	32.8	46.0
3.097500	13.4	GND	L1	10.0	32.6	46.0
3.147000	14.1	GND	L1	10.0	31.9	46.0

WCDMA Band II-AE4

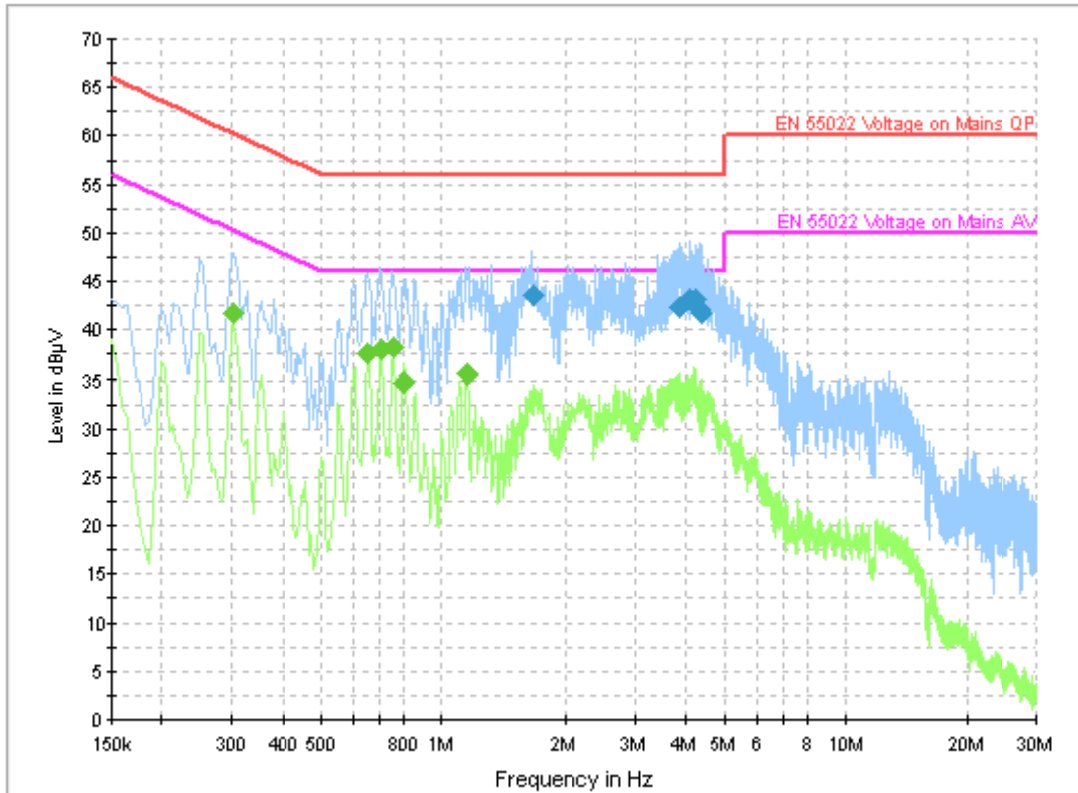


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.666500	43.6	GND	L1	10.0	12.4	56.0
3.867000	42.4	GND	L1	10.0	13.6	56.0
4.101000	43.2	GND	L1	10.0	12.8	56.0
4.204500	43.1	GND	L1	10.0	12.9	56.0
4.308000	42.1	GND	L1	10.0	13.9	56.0
4.357500	41.7	GND	L1	10.0	14.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.303000	41.7	GND	N	10.0	8.5	50.2
0.654000	37.6	GND	N	10.0	8.4	46.0
0.703500	37.9	GND	N	10.0	8.1	46.0
0.753000	38.3	GND	N	10.0	7.7	46.0
0.802500	34.8	GND	N	10.0	11.2	46.0
1.158000	35.5	GND	N	10.0	10.5	46.0

WCDMA Band V-AE4

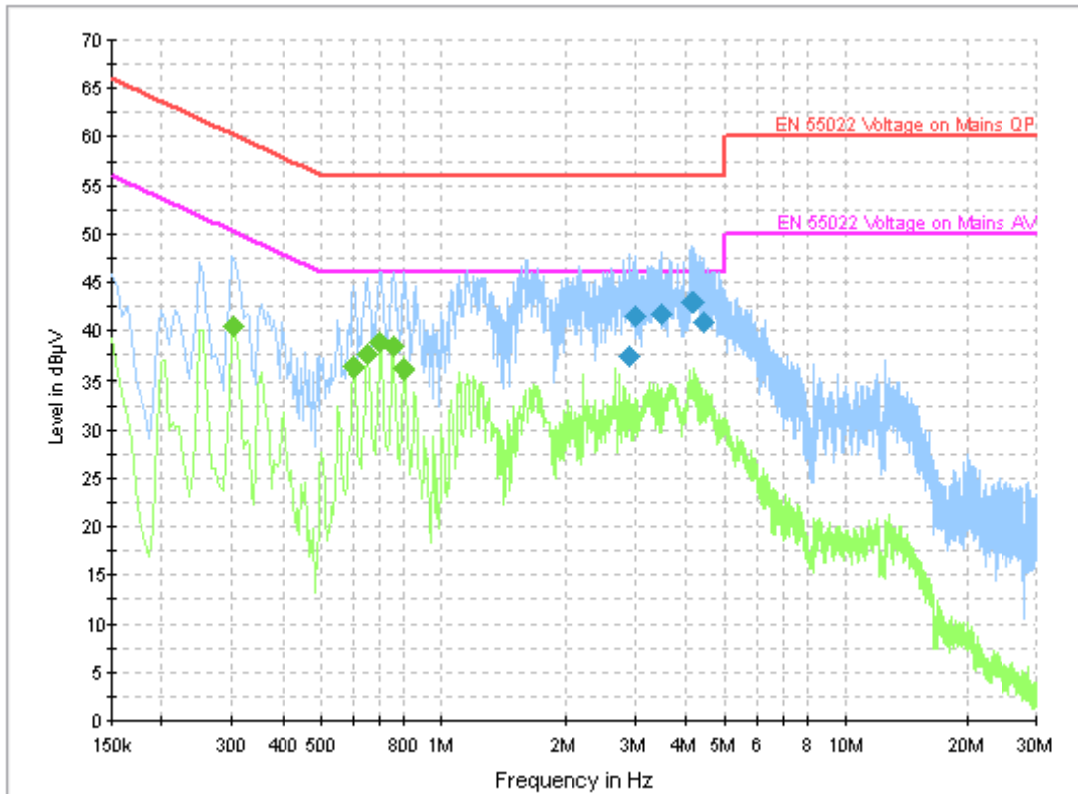


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.886000	37.4	GND	N	10.0	18.6	56.0
2.976000	41.4	GND	L1	10.0	14.6	56.0
3.484500	41.6	GND	L1	10.0	14.4	56.0
4.128000	43.0	GND	L1	10.0	13.0	56.0
4.150500	43.0	GND	L1	10.0	13.0	56.0
4.425000	40.9	GND	L1	10.0	15.1	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.303000	40.5	GND	N	10.0	9.7	50.2
0.600000	36.4	GND	N	10.0	9.6	46.0
0.649500	37.7	GND	N	10.0	8.3	46.0
0.699000	38.8	GND	N	10.0	7.2	46.0
0.753000	38.4	GND	N	10.0	7.6	46.0
0.802500	36.2	GND	N	10.0	9.8	46.0

WCDMA Band IV-AE4

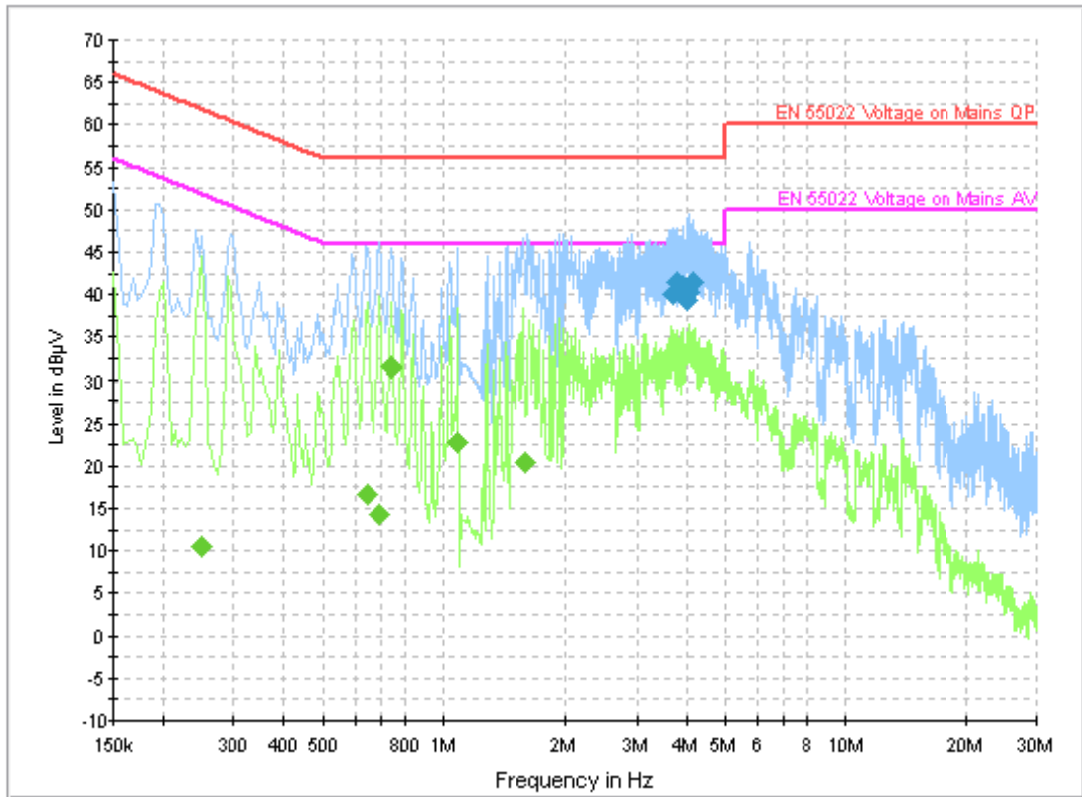


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.696000	40.0	GND	L1	10.0	16.0	56.0
3.799500	41.5	GND	L1	10.0	14.5	56.0
3.939000	41.0	GND	L1	10.0	15.0	56.0
4.033500	39.2	GND	L1	10.0	16.8	56.0
4.083000	40.3	GND	L1	10.0	15.7	56.0
4.177500	41.5	GND	L1	10.0	14.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.249000	10.4	GND	N	10.0	41.3	51.8
0.645000	16.6	GND	N	10.0	29.4	46.0
0.694500	14.3	GND	N	10.0	31.7	46.0
0.744000	31.6	GND	N	10.0	14.4	46.0
1.081500	22.9	GND	N	10.0	23.1	46.0
1.581000	20.4	GND	N	10.0	25.6	46.0

MP3

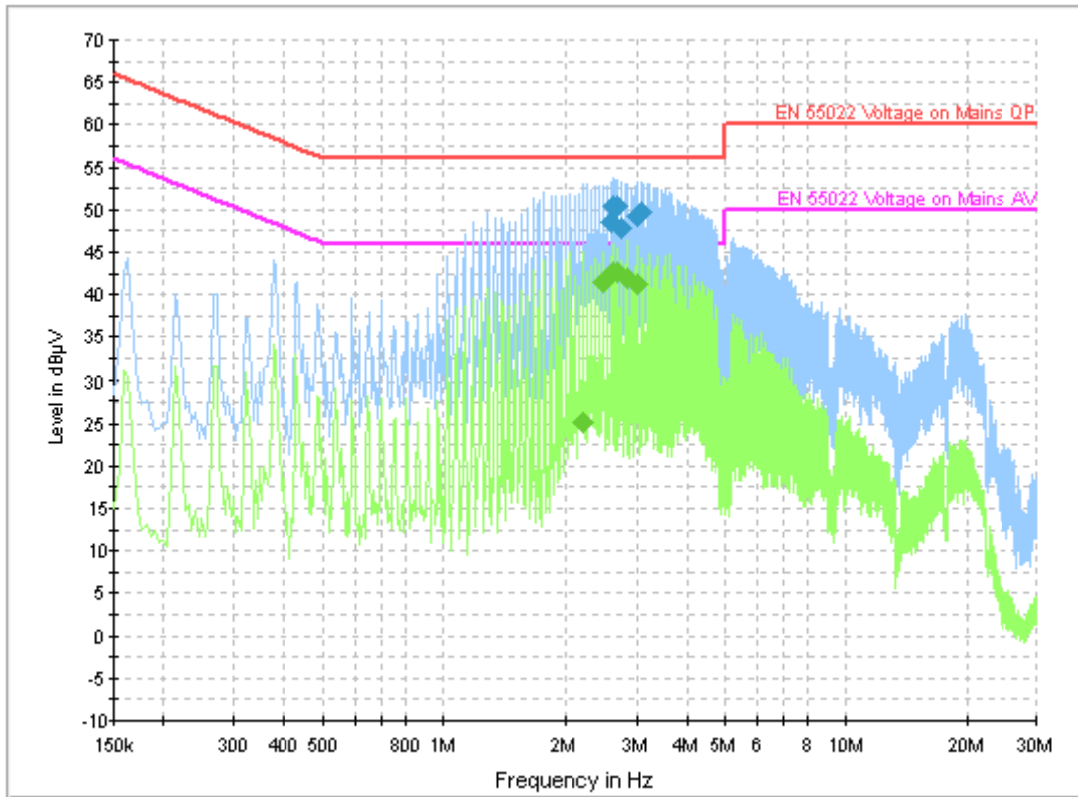


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.589000	48.5	GND	L1	10.0	7.5	56.0
2.638500	50.3	GND	L1	10.0	5.7	56.0
2.692500	50.4	GND	L1	10.0	5.6	56.0
2.751000	47.7	GND	L1	10.0	8.3	56.0
3.016500	49.3	GND	L1	10.0	6.7	56.0
3.070500	49.7	GND	L1	10.0	6.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.211000	25.1	GND	L1	10.0	20.9	46.0
2.476500	41.4	GND	L1	10.0	4.6	46.0
2.638500	42.7	GND	L1	10.0	3.3	46.0
2.692500	42.7	GND	L1	10.0	3.3	46.0
2.854500	42.0	GND	L1	10.0	4.0	46.0
3.016500	41.3	GND	L1	10.0	4.7	46.0

Camera

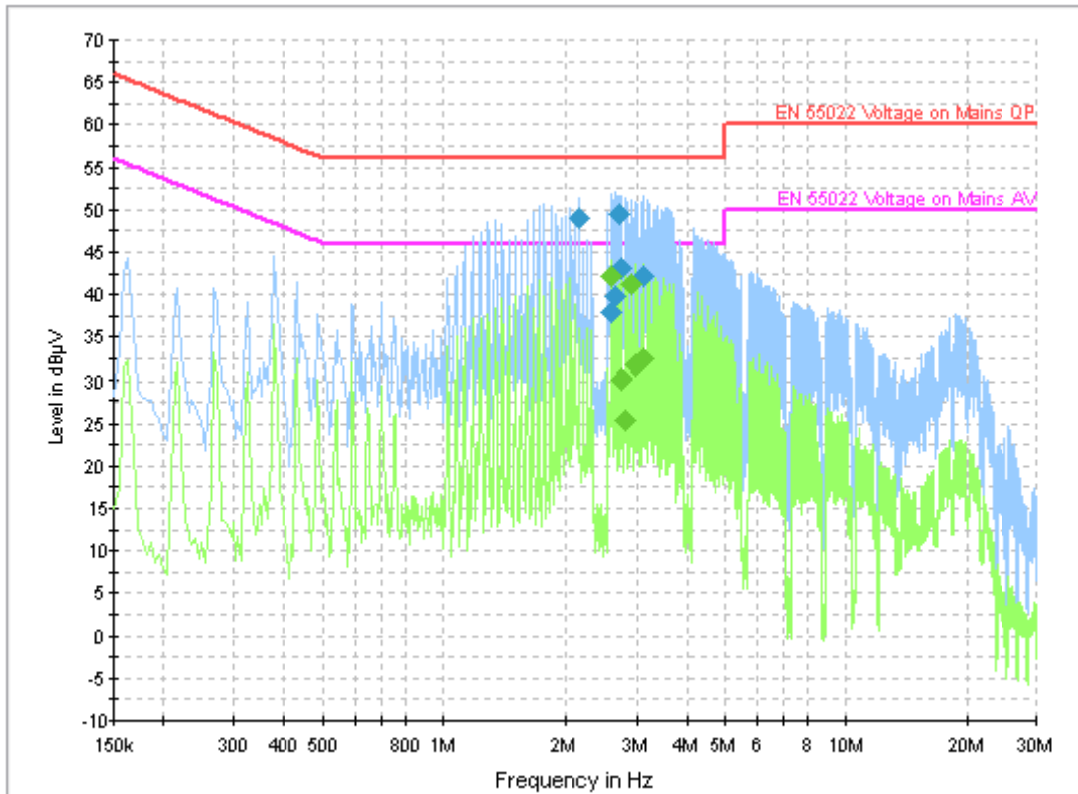

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.157000	49.0	GND	L1	10.0	7.0	56.0
2.589000	37.8	GND	L1	10.0	18.2	56.0
2.643000	39.9	GND	L1	10.0	16.1	56.0
2.701500	49.5	GND	L1	10.0	6.5	56.0
2.751000	43.1	GND	L1	10.0	12.9	56.0
3.129000	42.2	GND	L1	10.0	13.8	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.589000	42.2	GND	L1	10.0	3.8	46.0
2.751000	30.1	GND	L1	10.0	15.9	46.0
2.805000	25.4	GND	L1	10.0	20.6	46.0
2.913000	41.3	GND	L1	10.0	4.7	46.0
2.967000	31.9	GND	L1	10.0	14.1	46.0
3.129000	32.4	GND	L1	10.0	13.6	46.0

A.4 FREQUENCY STABILITY

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II, WCDMA Band V, and WCDMA BAND IV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the

nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

WCDMA Band II

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	10	0.005
3.8	-6	0.003
4.2	-6	0.003

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	6	0.003
-20	-6	0.003
-10	-7	0.004
0	5	0.003
10	-6	0.003
20	4	0.002
30	-8	0.004
40	-11	0.006
50	6	0.003

WCDMA Band V

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-6	0.007
3.8	-5	0.006
4.2	-4	0.005

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	6	0.007
-20	-4	0.005
-10	5	0.006
0	7	0.008
10	20	0.024
20	-4	0.005
30	-5	0.006
40	-4	0.005
50	-5	0.006

WCDMA Band IV

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	7	0.004
3.8	5	0.003
4.2	9	0.005

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	11	0.006
-20	-7	0.004
-10	10	0.006
0	5	0.003
10	9	0.005
20	-10	0.006
30	-9	0.005
40	11	0.006
50	11	0.006

A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II, WCDMA Band IV and WCDMA Band V . The table below lists the measured -20dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1852.4	4.183
1880.0	4.183
1907.6	4.167


WCDMA Band II

Channel 9262-Occupied Bandwidth (-20dBc BW)

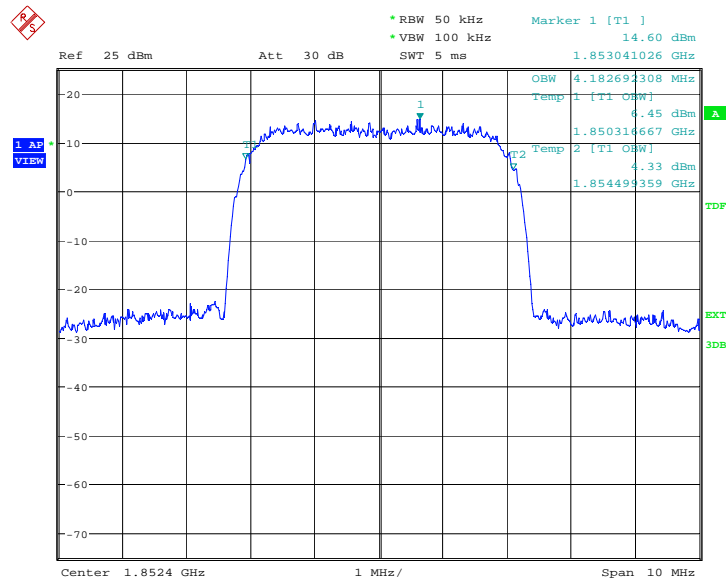


Date: 21.DEC.2012 07:16:43

Channel 9400-Occupied Bandwidth (-20dBc BW)

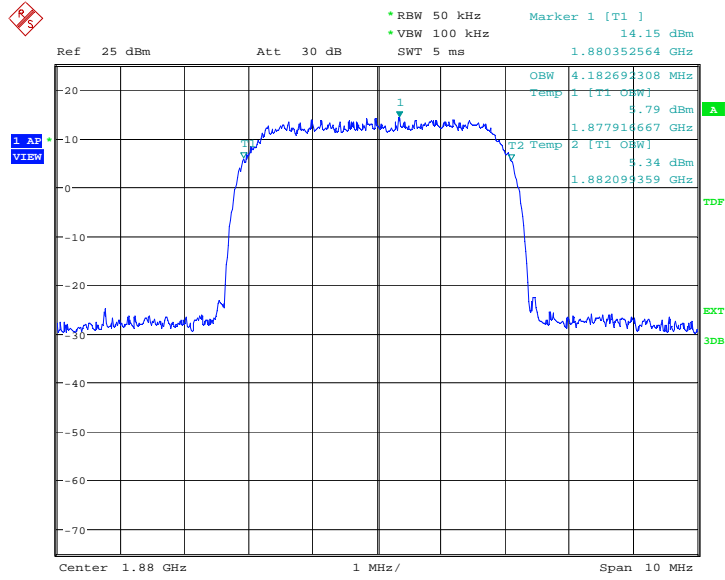

Channel 9538-Occupied Bandwidth (-20dBc BW)

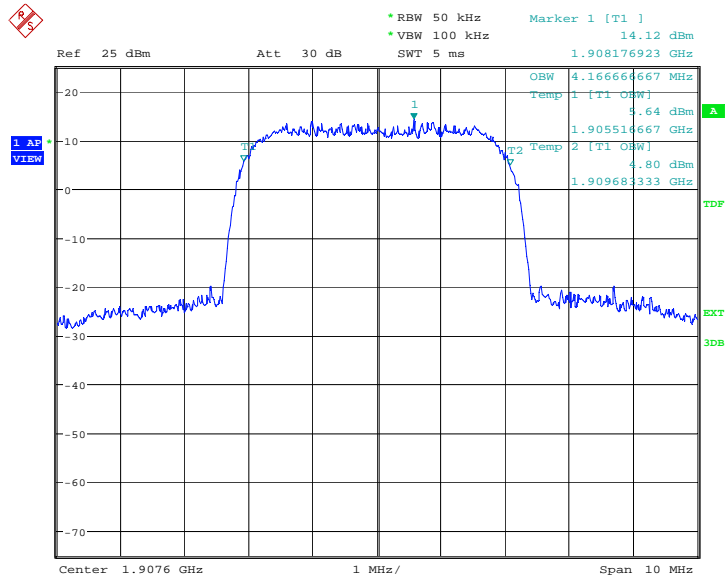


WCDMA Band IV(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	4.167
1740.0	4.167
1752.6	4.167


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-20dBc BW)

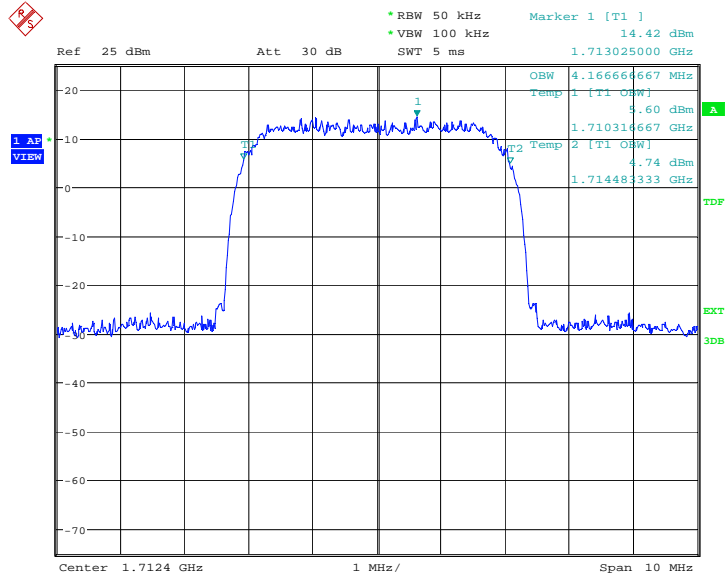


Date: 21.DEC.2012 07:34:50

Channel 1450-Occupied Bandwidth (-20dBc BW)

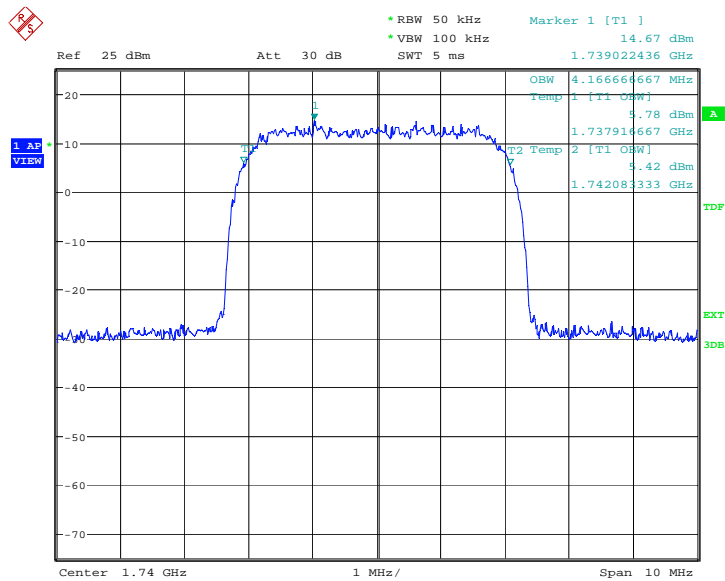

Date: 21.DEC.2012 07:35:24

Channel 1513-Occupied Bandwidth (-20dBc BW)

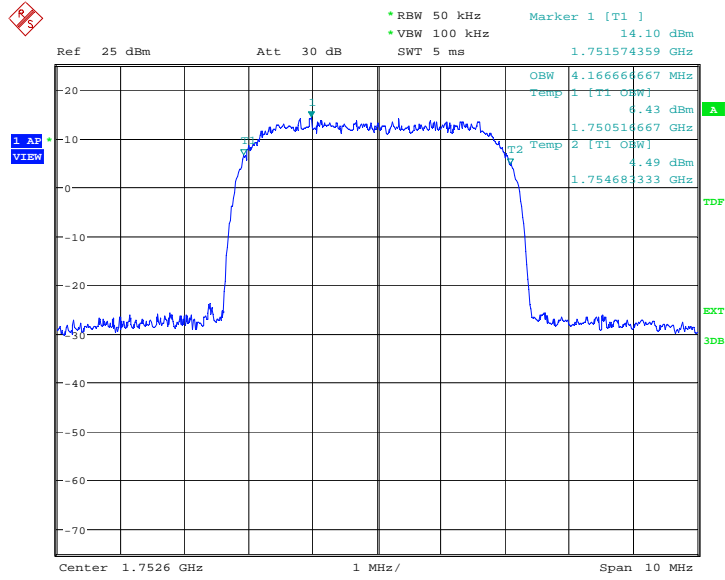


Date: 21.DEC.2012 07:35:59

WCDMA Band V(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
826.4	4.183
836.6	4.167
846.6	4.167


WCDMA Band V

Channel 4132-Occupied Bandwidth (-20dBc BW)

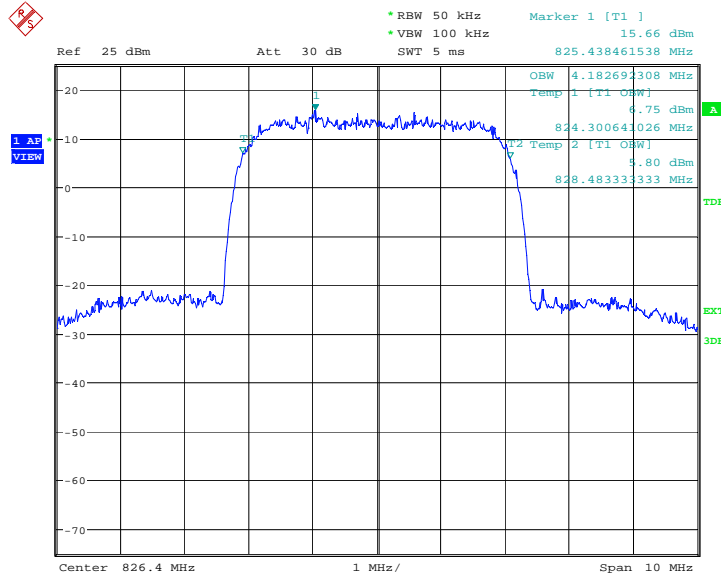


Date: 21.DEC.2012 07:53:21

Channel 4183-Occupied Bandwidth (-20dBc BW)

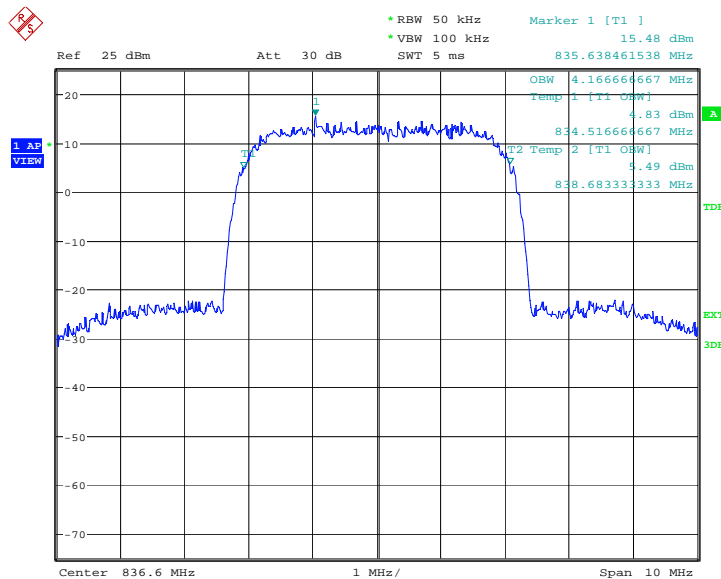

Date: 21.DEC.2012 07:53:55

Channel 4233-Occupied Bandwidth (-20dBc BW)

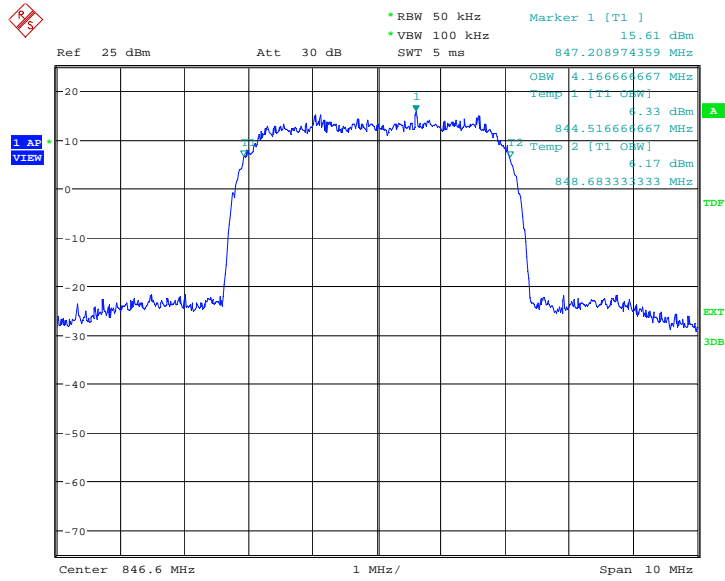

Date: 21.DEC.2012 07:54:30

A.6 EMISSION BANDWIDTH

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the WCDMA Band II, WCDMA Band IV and WCDMA Band V. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1852.4	4.487
1880.0	4.471
1907.6	4.503


WCDMA Band II

Channel 9262-Occupied Bandwidth (-26dBc BW)

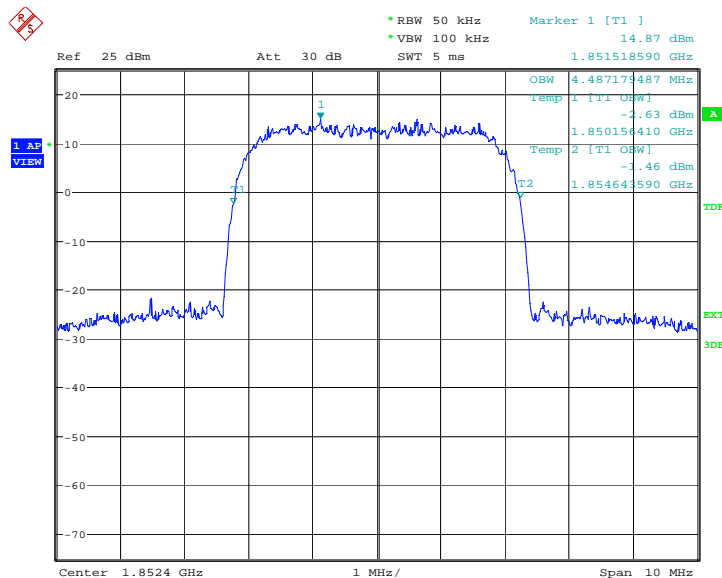


Date: 21.DEC.2012 07:18:28

Channel 9400-Occupied Bandwidth (-26dBc BW)

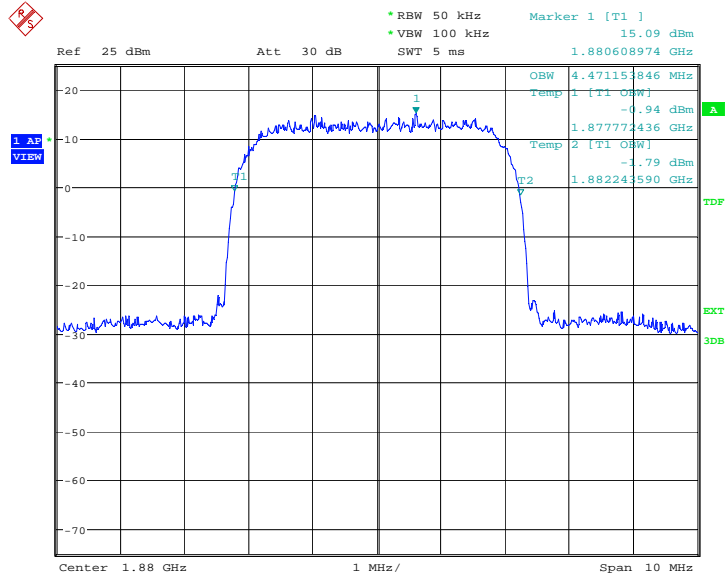

Date: 21.DEC.2012 07:19:03

Channel 9538-Occupied Bandwidth (-26dBc BW)

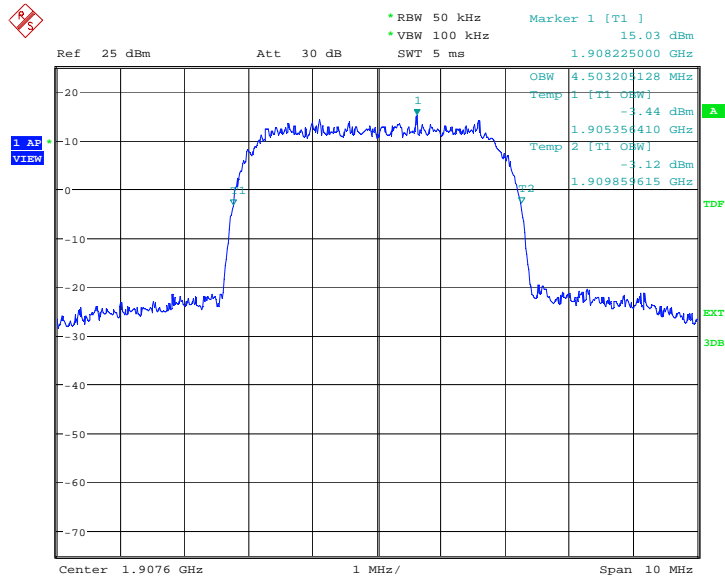


Date: 21.DEC.2012 07:19:38

WCDMA Band IV(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1712.4	4.487
1740.0	4.487
1752.6	4.487


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-26dBc BW)

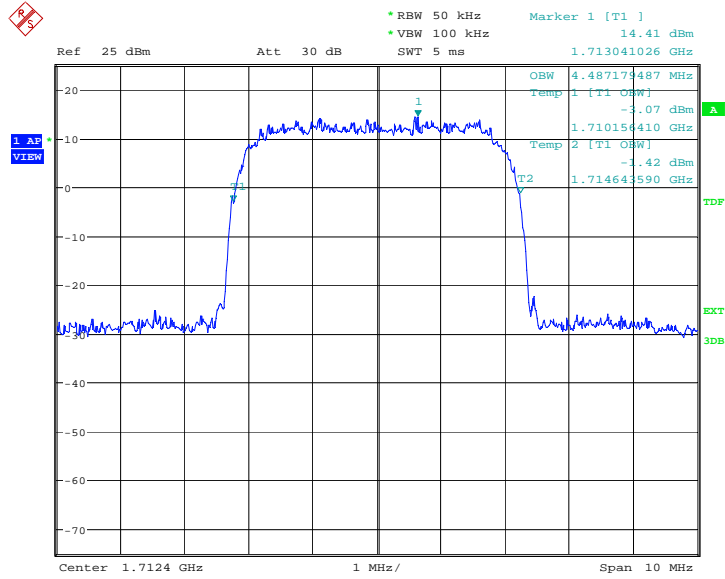


Date: 21.DEC.2012 07:36:35

Channel 1450-Occupied Bandwidth (-26dBc BW)

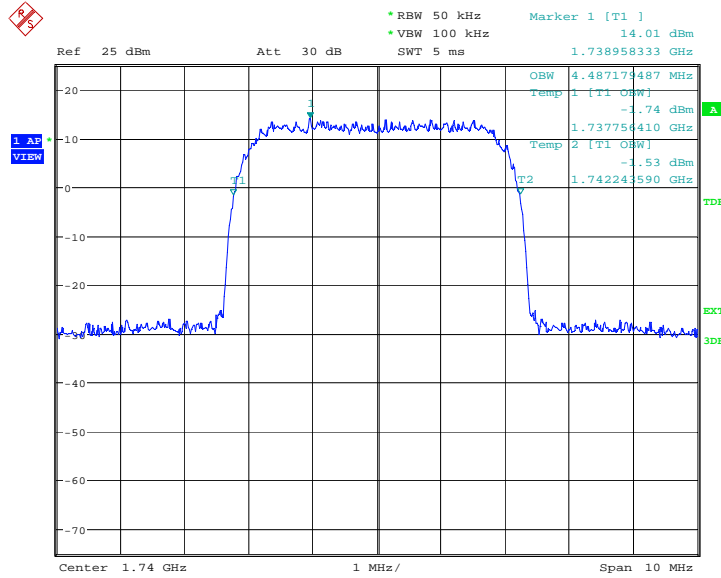

Date: 21.DEC.2012 07:37:09

Channel 1513-Occupied Bandwidth (-26dBc BW)

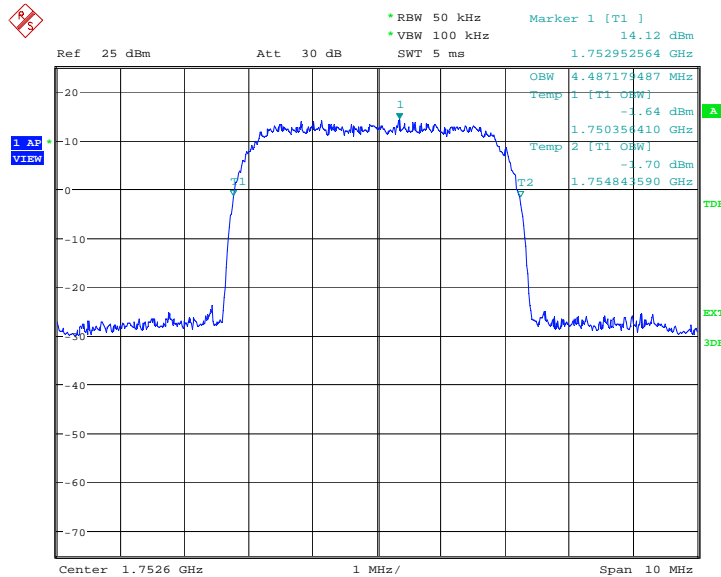


Date: 21.DEC.2012 07:37:44

WCDMA Band V(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
826.40	4.503
836.60	4.503
846.60	4.519


WCDMA Band V

Channel 4132-Occupied Bandwidth (-26dBc BW)

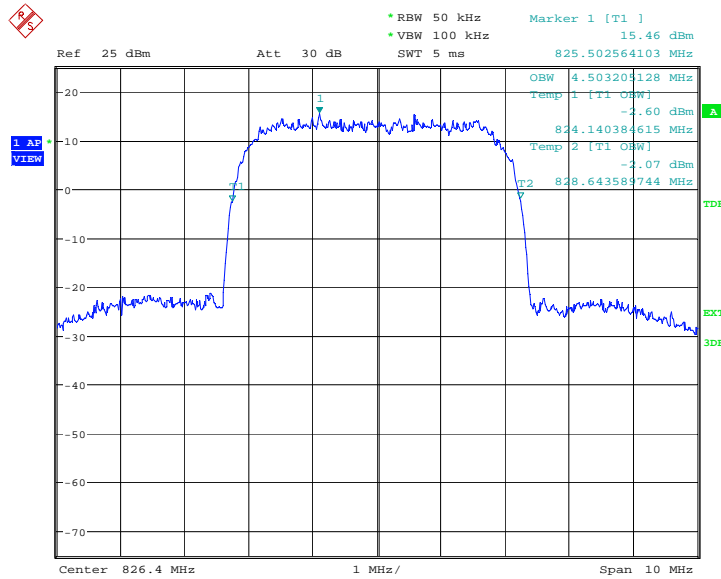


Date: 21.DEC.2012 07:55:06

Channel 4183-Occupied Bandwidth (-26dBc BW)

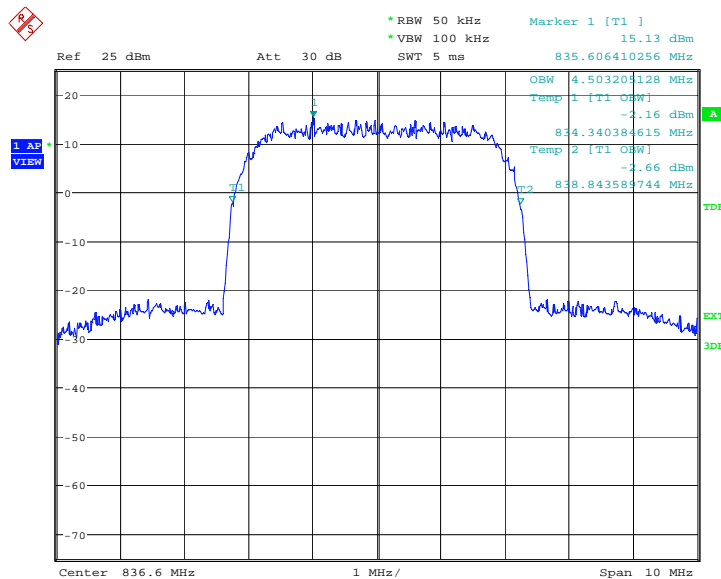

Date: 21.DEC.2012 07:55:40

Channel 4233-Occupied Bandwidth (-26dBc BW)

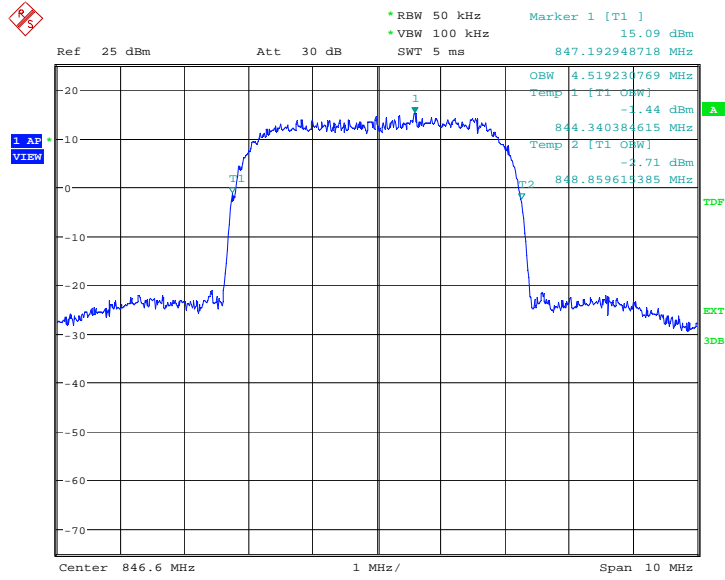


Date: 21.DEC.2012 07:56:15

A.7 BAND EDGE COMPLIANCE


WCDMA Band II

LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

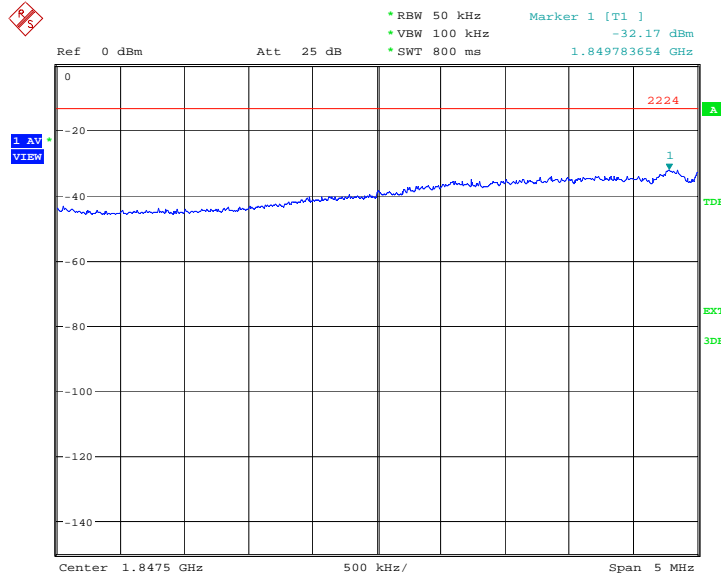


Date: 21.DEC.2012 07:19:49

HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

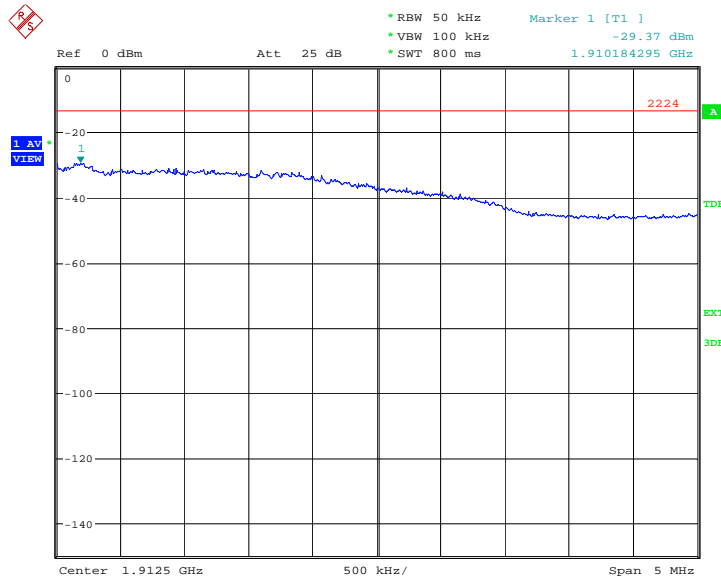


Date: 21.DEC.2012 07:20:00

**WCDMA Band IV
LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312**

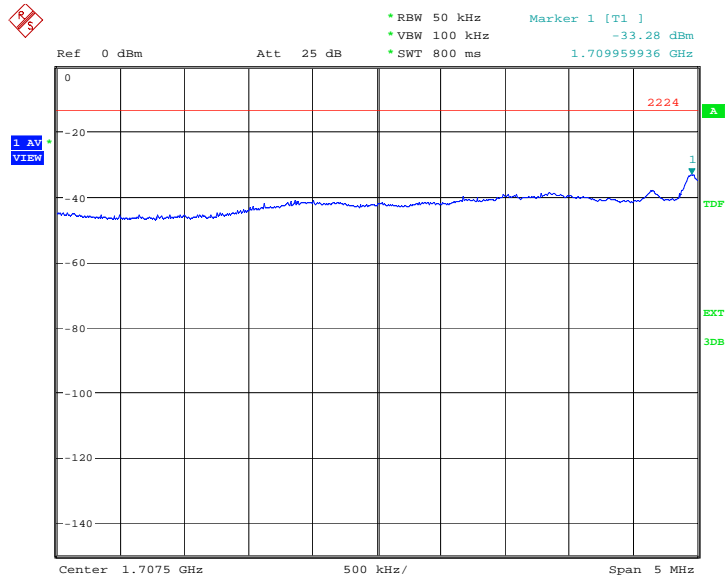


Date: 21.DEC.2012 07:37:55

HIGH BAND EDGE BLOCK-C (WCDMA Band IV) –Channel 1513

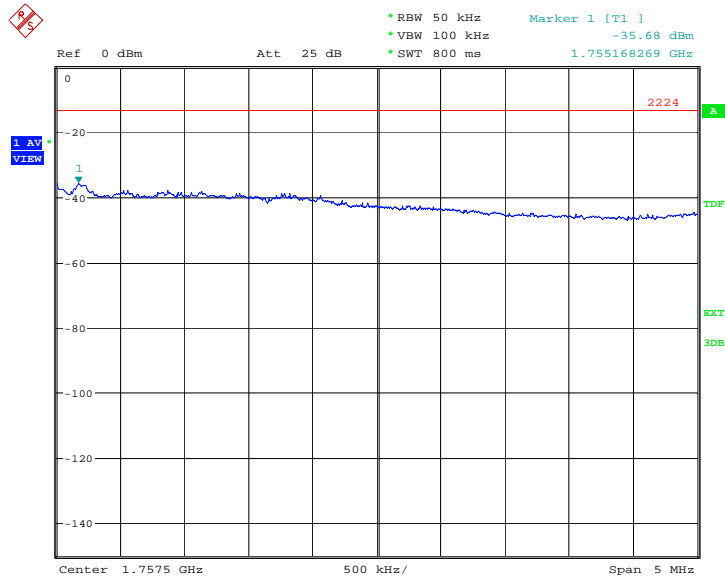


Date: 21.DEC.2012 07:38:06

WCDMA Band V
LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

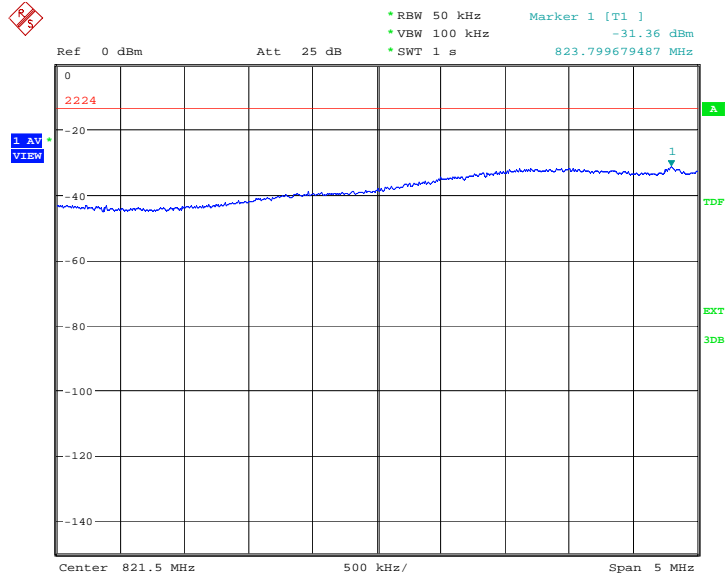

Date: 21.DEC.2012 07:56:26

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

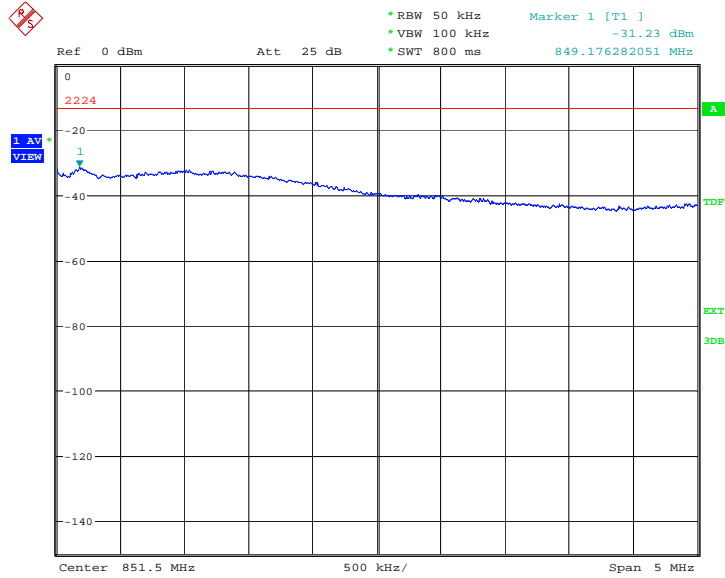

Date: 21.DEC.2012 07:56:37

A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band IV, data taken from 30 MHz to 20GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1450	1740.00
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 8.2 Measurement Limit

Part 24.238, Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a


limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3 Measurement result

WCDMA Band II

A.8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

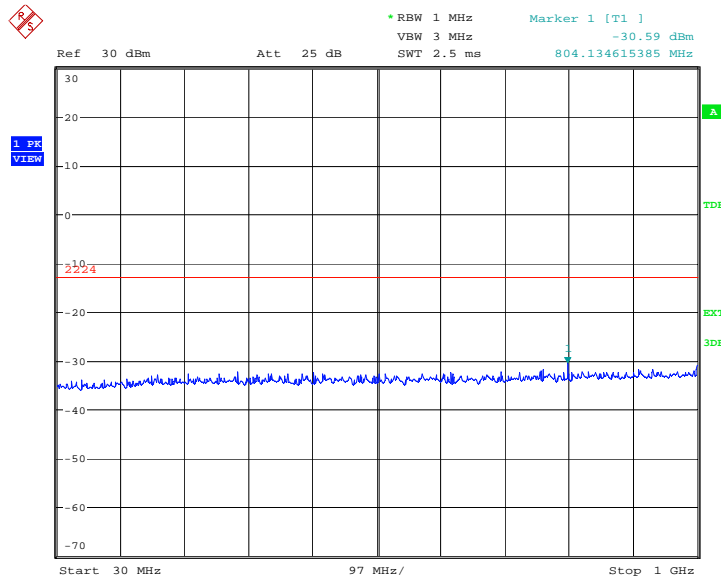


Date: 21.DEC.2012 07:20:31

A.8.3.2 Channel 9262: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

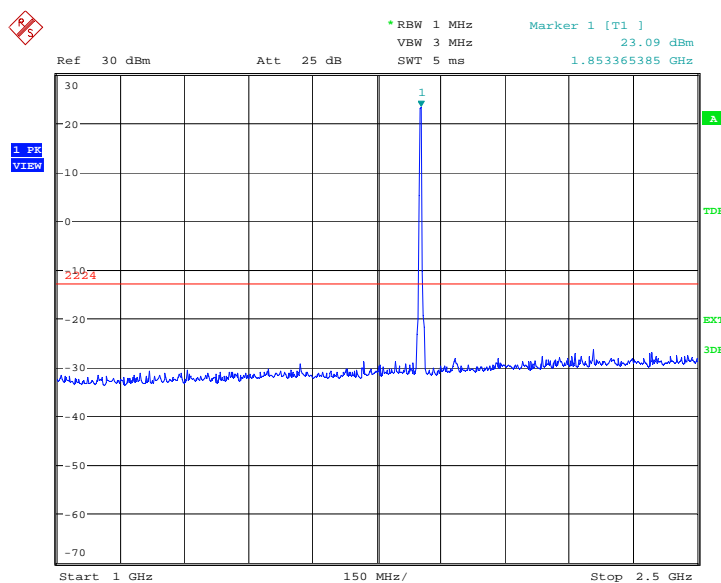


Date: 21.DEC.2012 07:20:59

A.8.3.3 Channel 9262: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

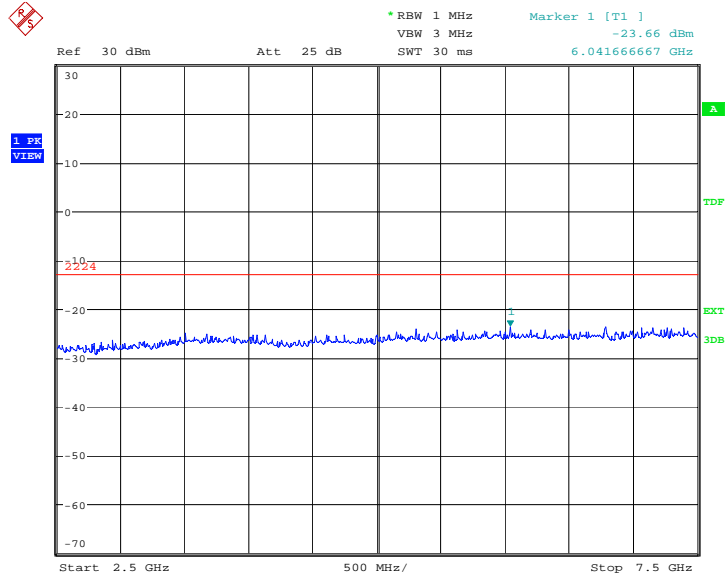


Date: 21.DEC.2012 07:21:28

A.8.3.4 Channel 9262: 7.5GHz –10GHz
Spurious emission limit –13dBm.

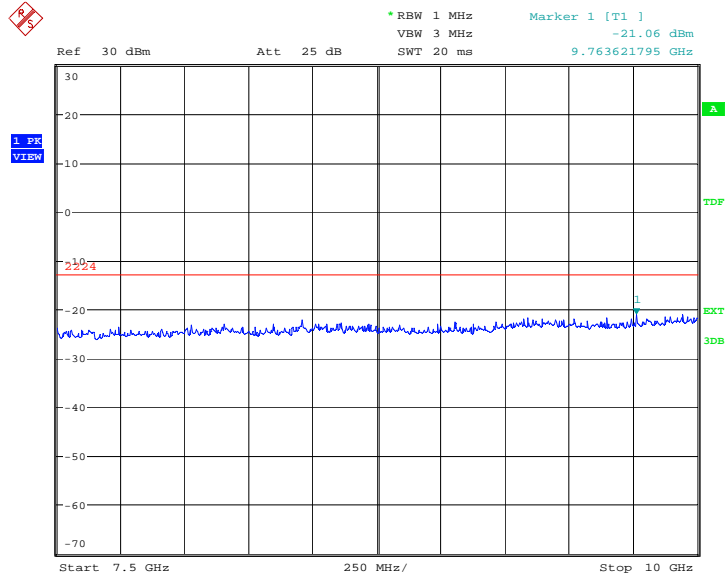


Date: 21.DEC.2012 07:21:56

A.8.3.5 Channel 9262: 10GHz –15GHz
Spurious emission limit –13dBm.

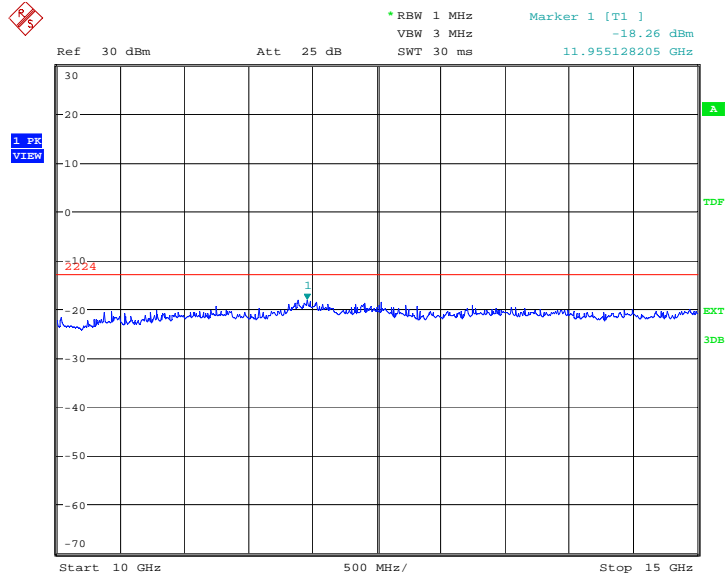


Date: 21.DEC.2012 07:22:24

A.8.3.6 Channel 9262: 15GHz –20GHz
Spurious emission limit –13dBm.

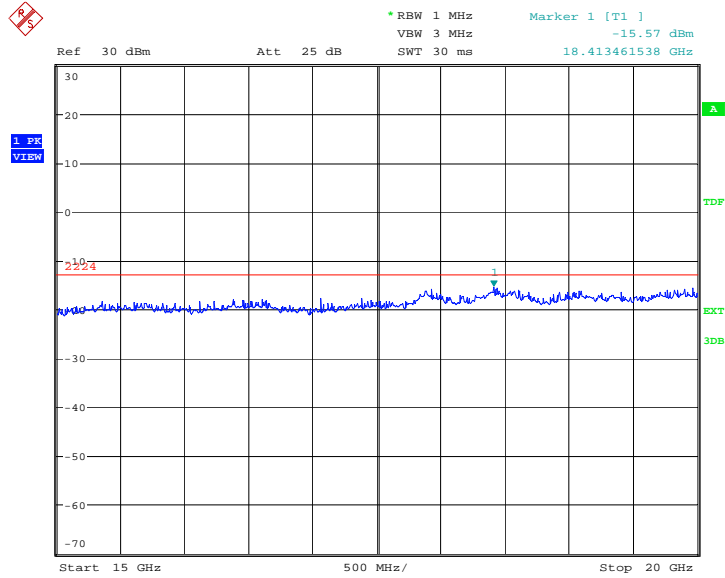

Date: 21.DEC.2012 07:22:52


A.8.3.7 Channel 9400: 30MHz –1GHz
Spurious emission limit –13dBm.

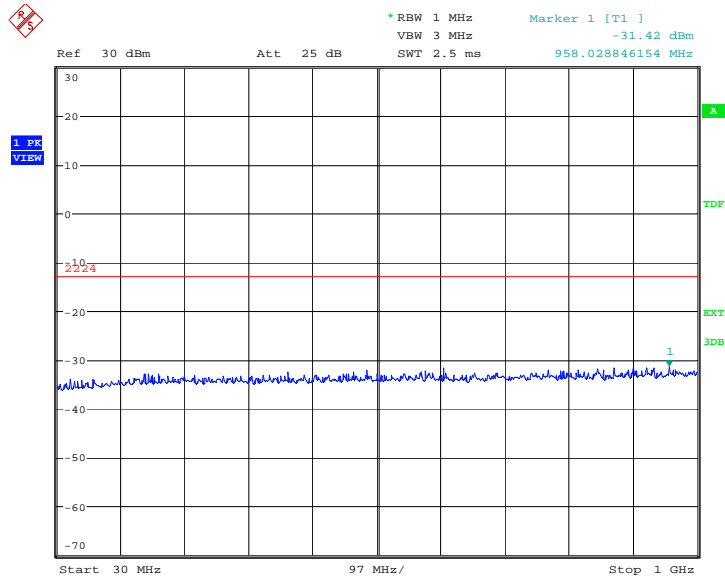

Date: 21.DEC.2012 07:23:23


A.8.3.8 Channel 9400: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

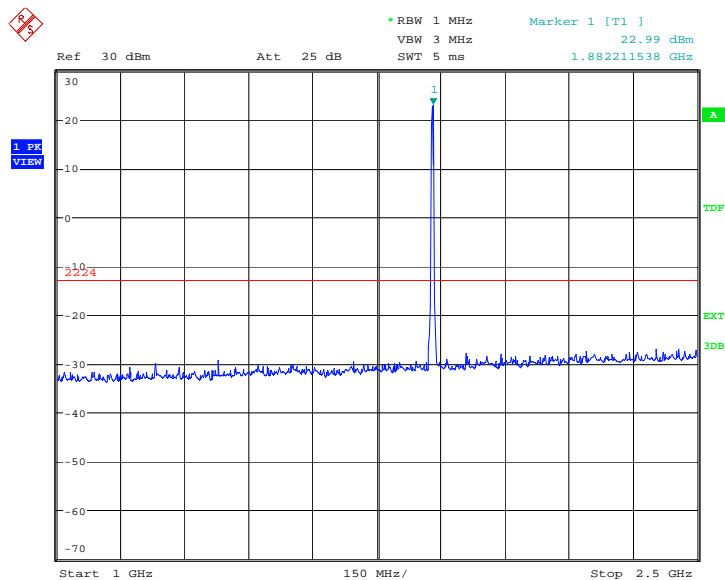


Date: 21.DEC.2012 07:23:52

A.8.3.9 Channel 9400: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

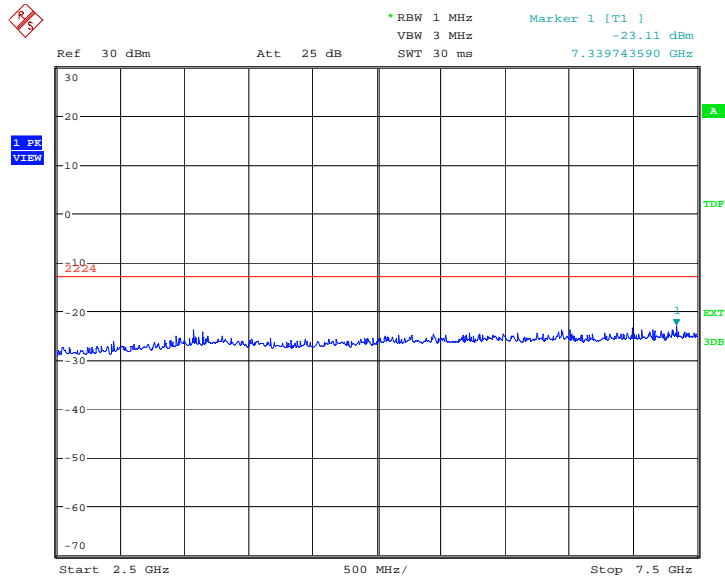


Date: 21.DEC.2012 07:24:20

A.8.3.10 Channel 9400: 7.5GHz –10GHz
Spurious emission limit –13dBm.

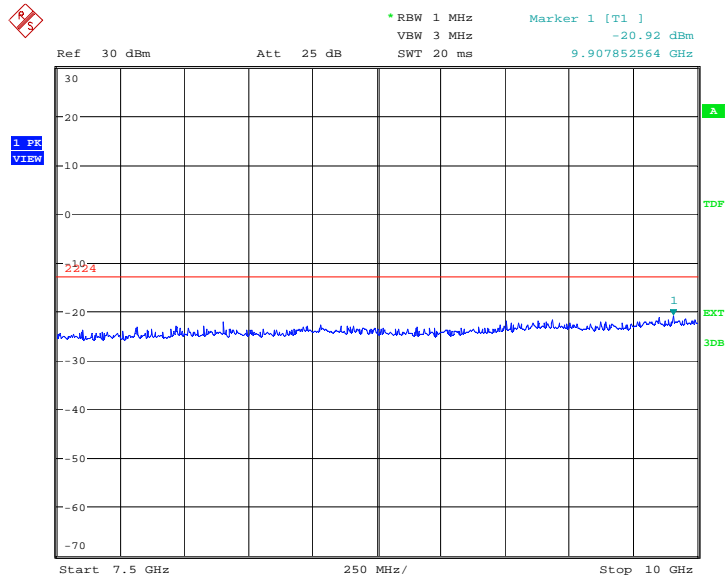


Date: 21.DEC.2012 07:24:48

A.8.3.11 Channel 9400: 10GHz –15GHz
Spurious emission limit –13dBm.

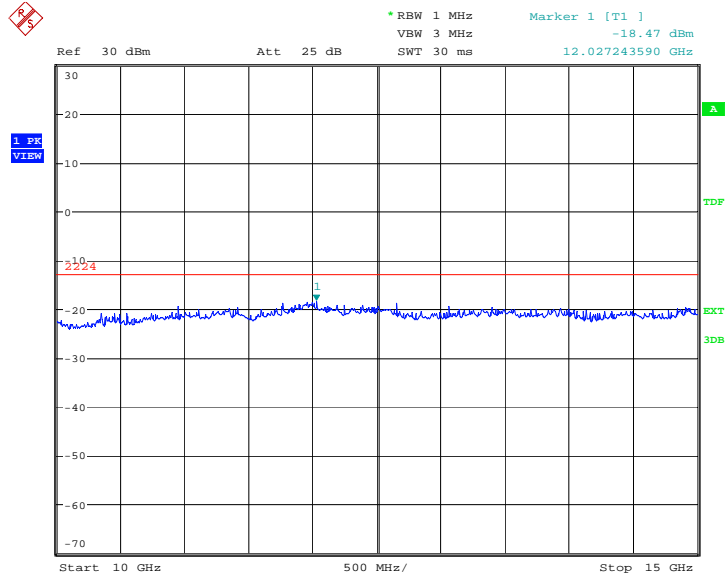


Date: 21.DEC.2012 07:25:16

A.8.3.12 Channel 9400: 15GHz –20GHz
Spurious emission limit –13dBm.

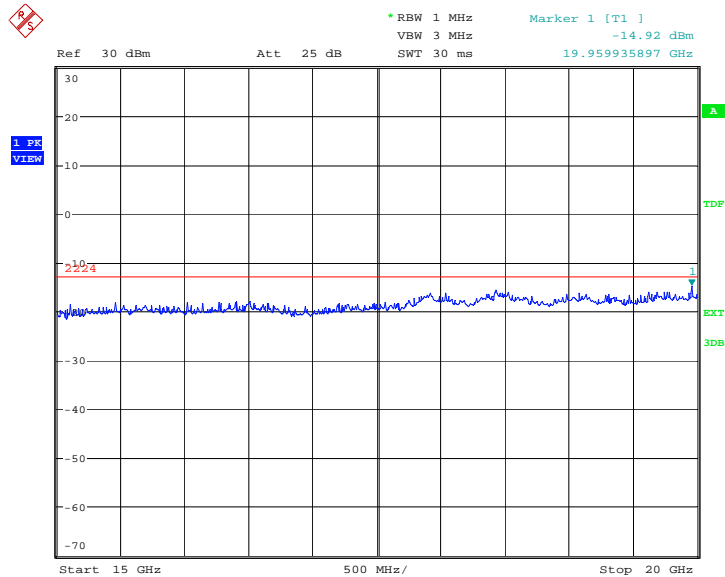

Date: 21.DEC.2012 07:25:44


A.8.3.13 Channel 9538: 30MHz –1GHz
Spurious emission limit –13dBm.

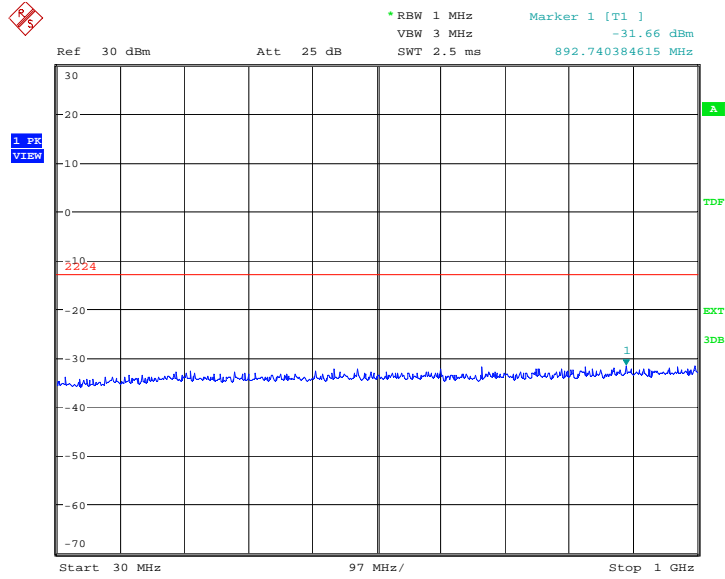

Date: 21.DEC.2012 07:26:16


A.8.3.14 Channel 9538: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

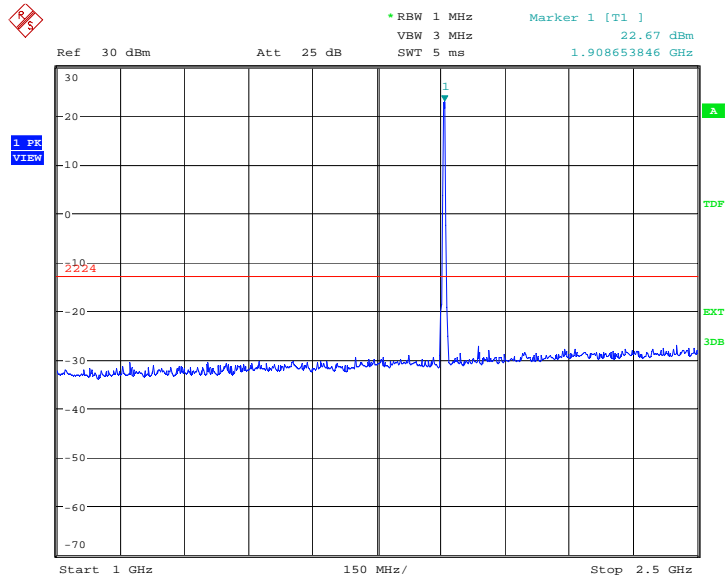


Date: 21.DEC.2012 07:26:44

A.8.3.15 Channel 9538: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

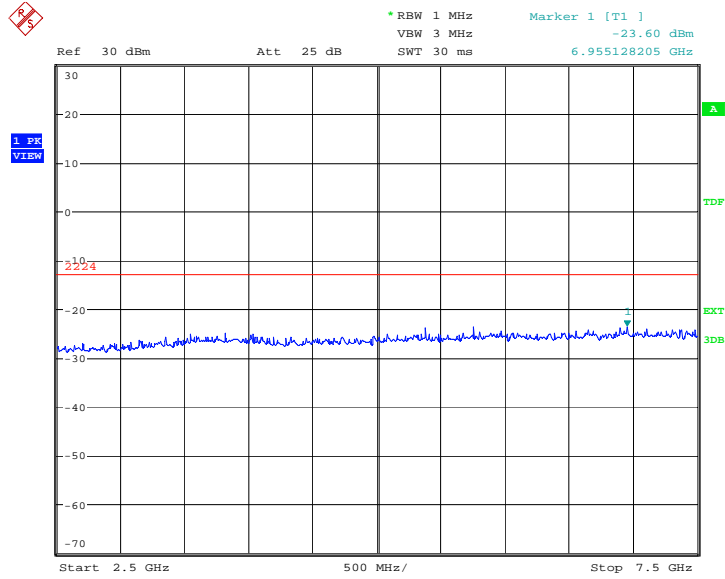


Date: 21.DEC.2012 07:27:12

A.8.3.16 Channel 9538: 7.5GHz –10GHz
Spurious emission limit –13dBm.

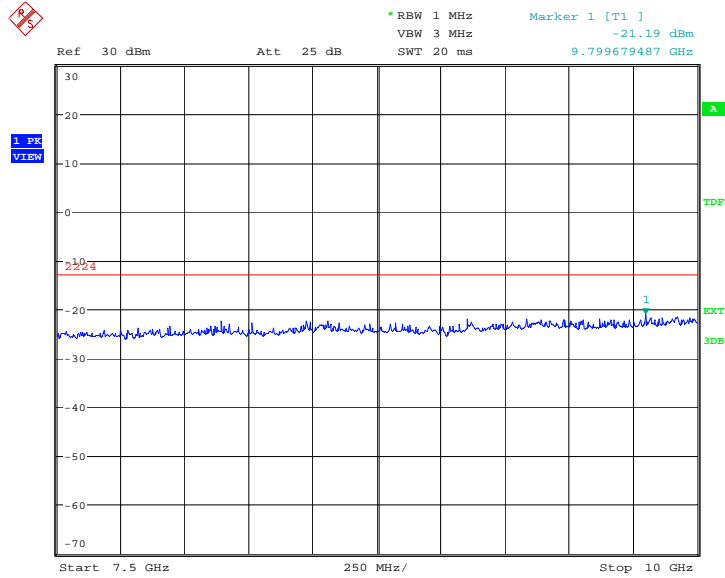


Date: 21.DEC.2012 07:27:40

A.8.3.17 Channel 9538: 10GHz –15GHz
Spurious emission limit –13dBm.

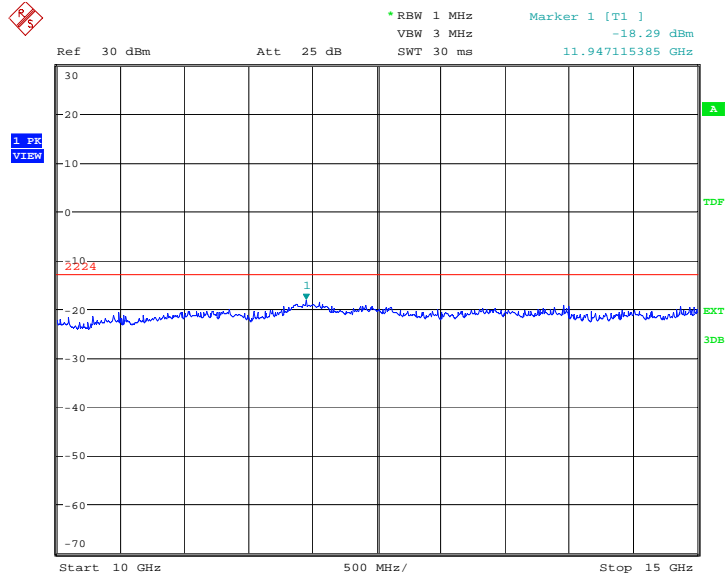


Date: 21.DEC.2012 07:28:08

A.8.3.18 Channel 9538: 15GHz –20GHz
Spurious emission limit –13dBm.

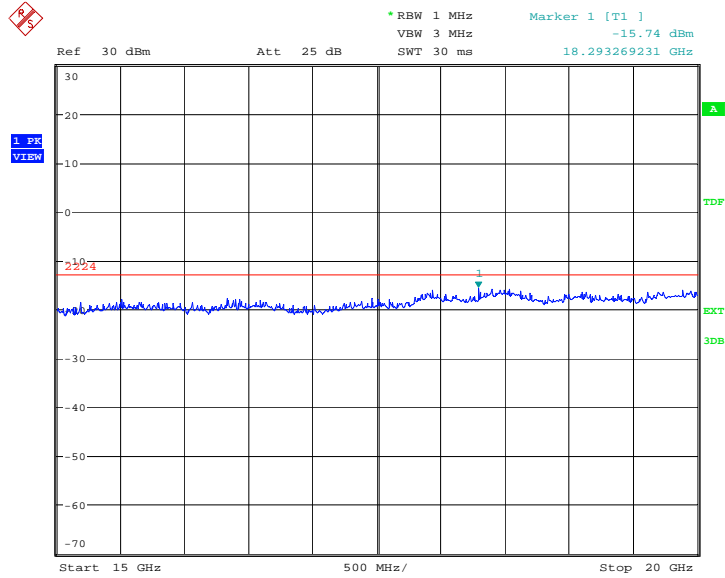


Date: 21.DEC.2012 07:28:37

A.8.3.19 Idle mode: 30MHz –1GHz
Spurious emission limit –13dBm.

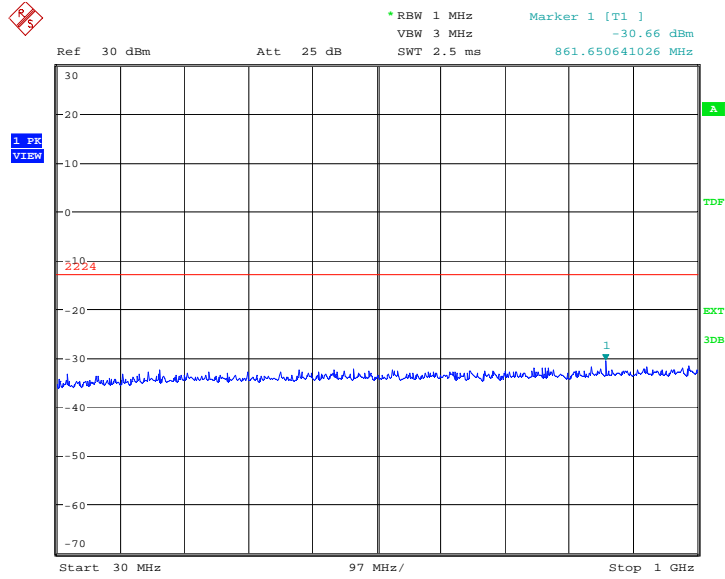


Date: 21.DEC.2012 07:29:06

A.8.3.20 Idle mode: 1GHz –2.5GHz
Spurious emission limit –13dBm.

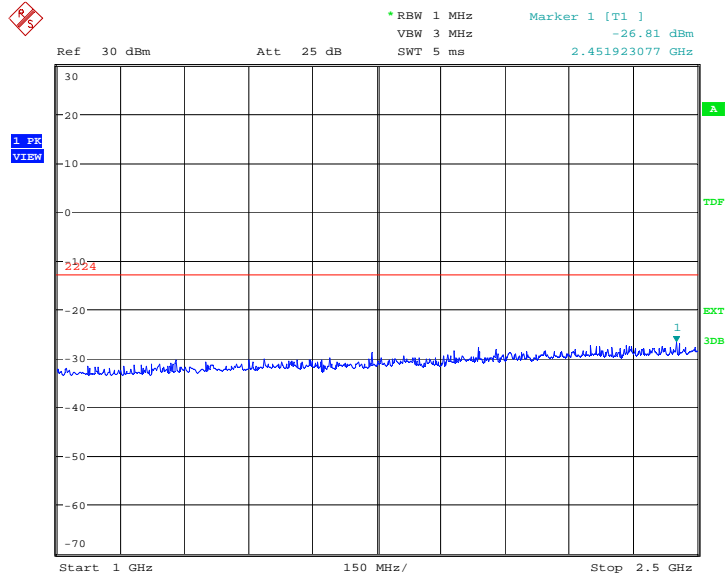


Date: 21.DEC.2012 07:29:34

A.8.3.21 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

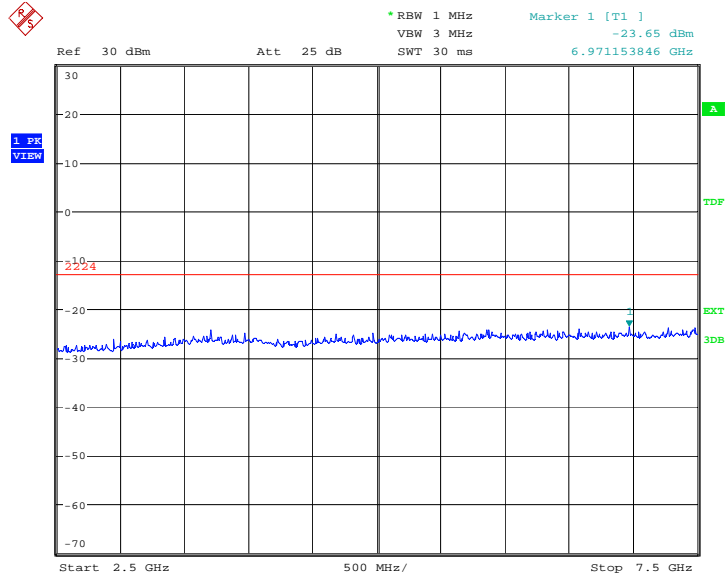


Date: 21.DEC.2012 07:30:02

A.8.3.22 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

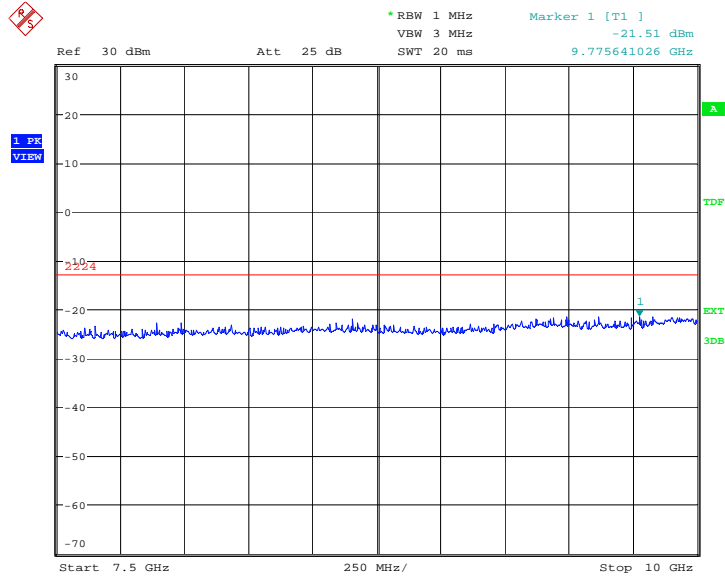


Date: 21.DEC.2012 07:30:30

A.8.3.23 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

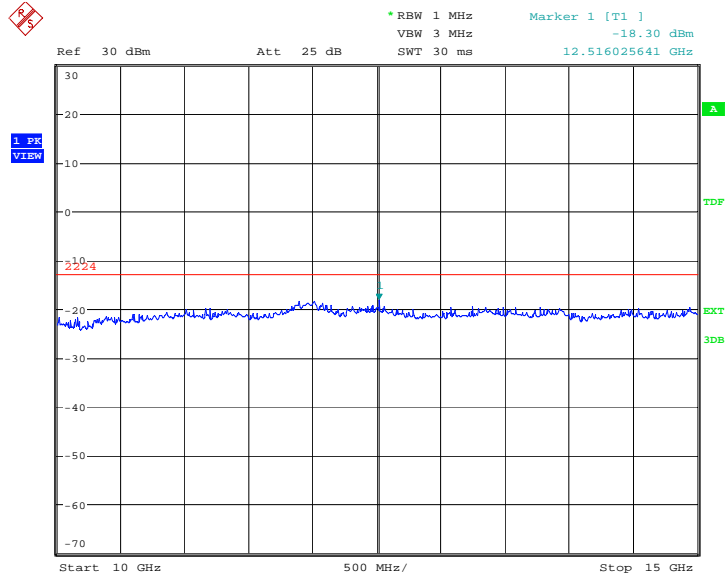

Date: 21.DEC.2012 07:30:59

A.8.3.24 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

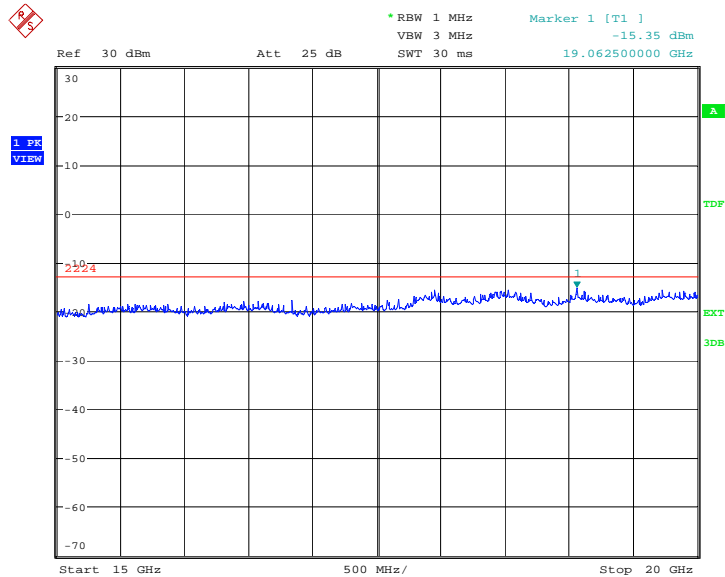


Date: 21.DEC.2012 07:31:27

WCDMA Band IV

A.8.3.25 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.

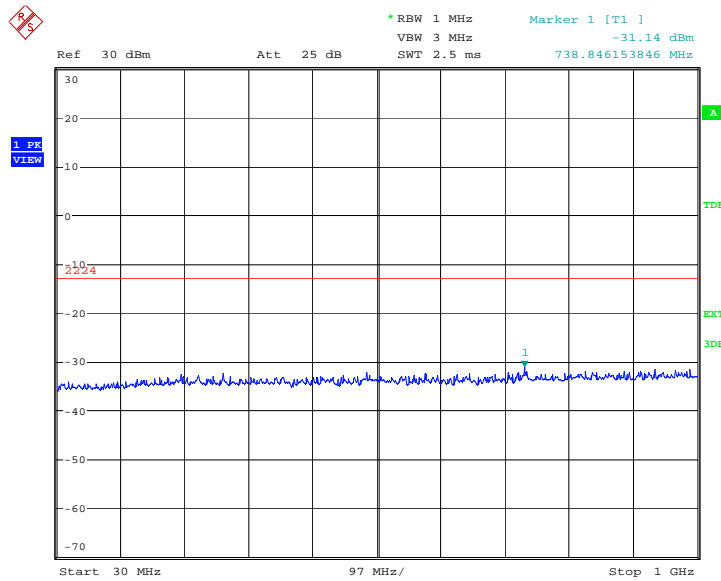


Date: 21.DEC.2012 07:38:37

A.8.3.26 Channel 1312: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

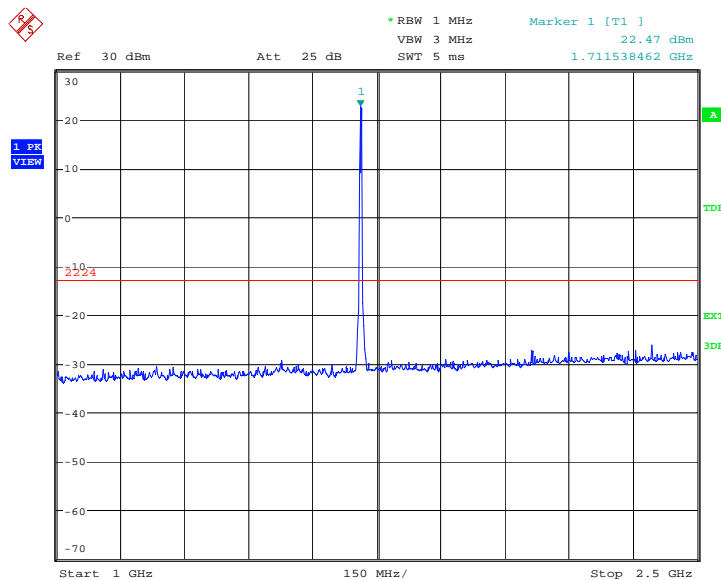


Date: 21.DEC.2012 07:39:06

A.8.3.27 Channel 1312: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

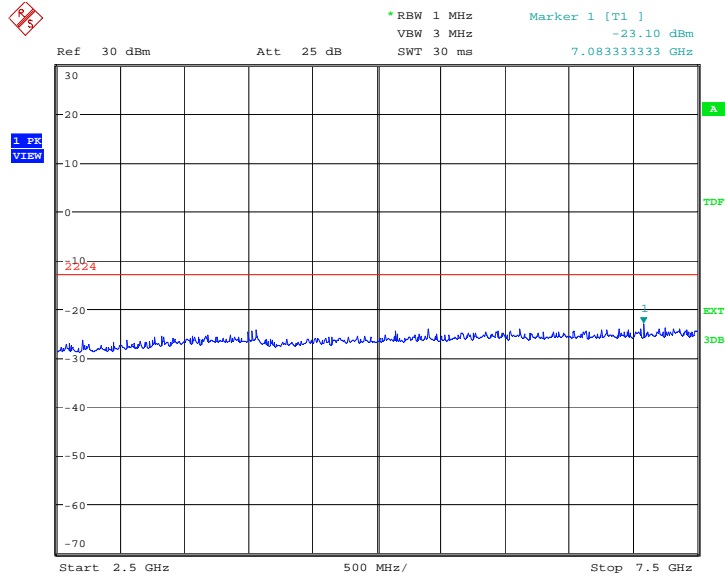


Date: 21.DEC.2012 07:39:34

A.8.3.28 Channel 1312: 7.5GHz –10GHz
Spurious emission limit –13dBm.

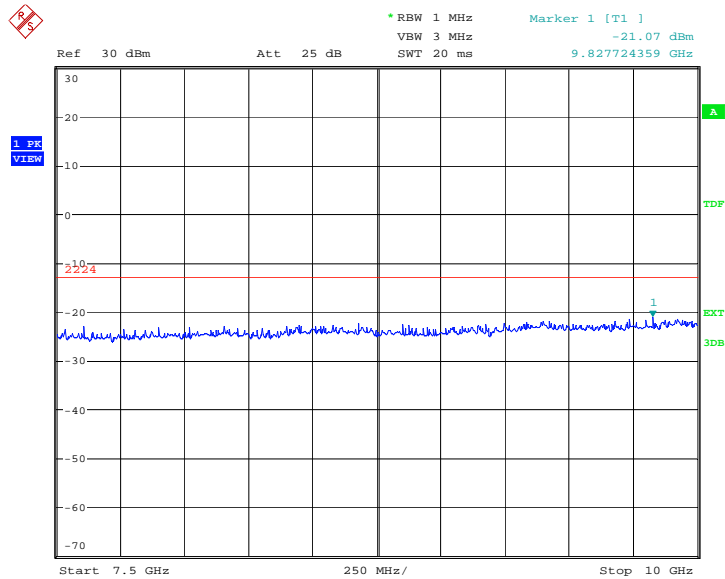


Date: 21.DEC.2012 07:40:02

A.8.3.29 Channel 1312: 10GHz –15GHz
Spurious emission limit –13dBm.

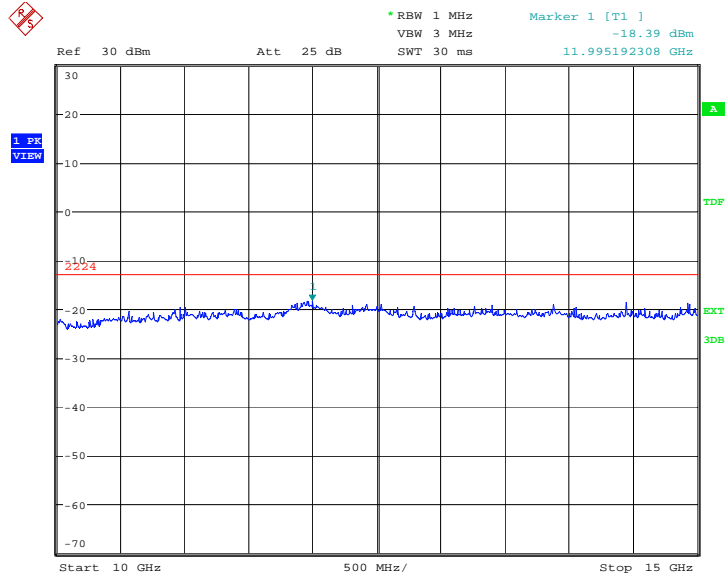


Date: 21.DEC.2012 07:40:30

A.8.3.30 Channel 1312: 15GHz –20GHz
Spurious emission limit –13dBm.

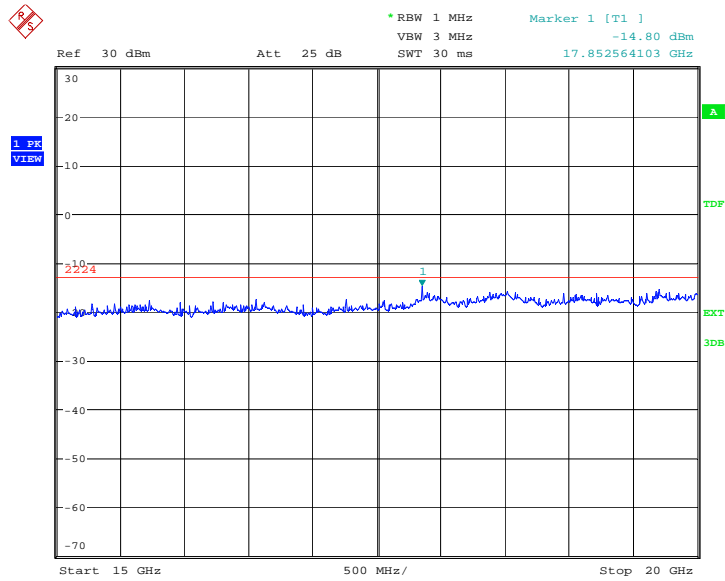

Date: 21.DEC.2012 07:40:59


A.8.3.31 Channel 1450: 30MHz –1GHz
Spurious emission limit –13dBm.

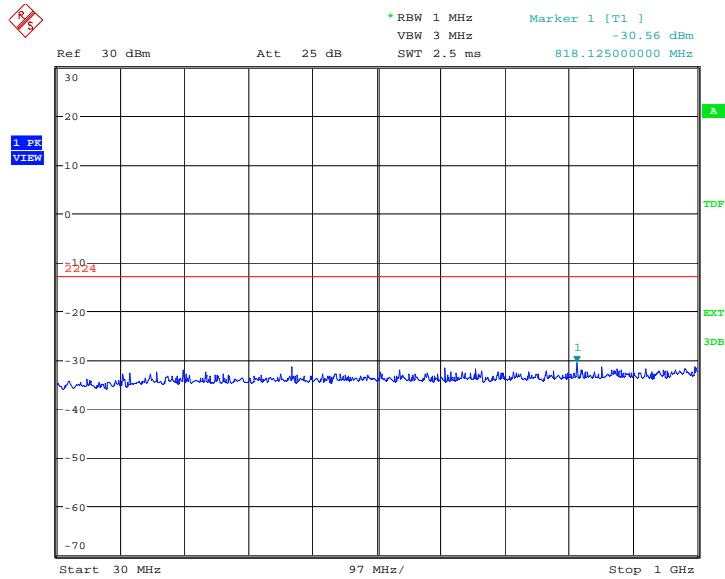

Date: 21.DEC.2012 07:41:30


A.8.3.32 Channel 1450: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

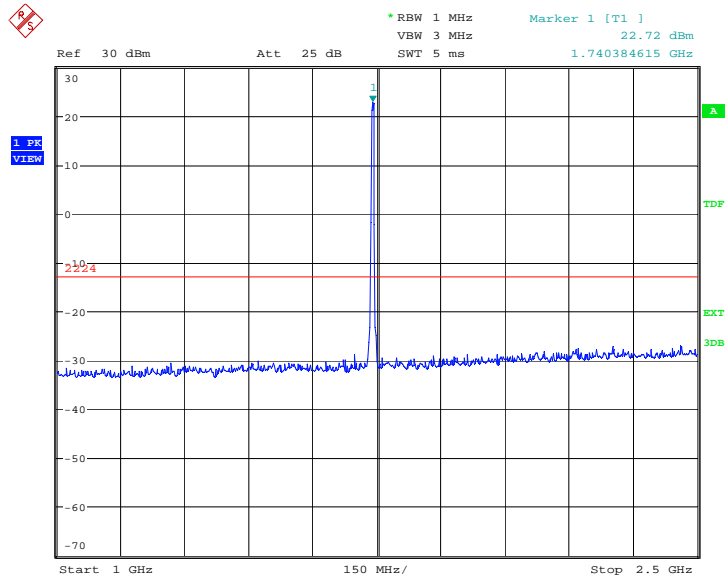


Date: 21.DEC.2012 07:41:58

A.8.3.33 Channel 1450: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

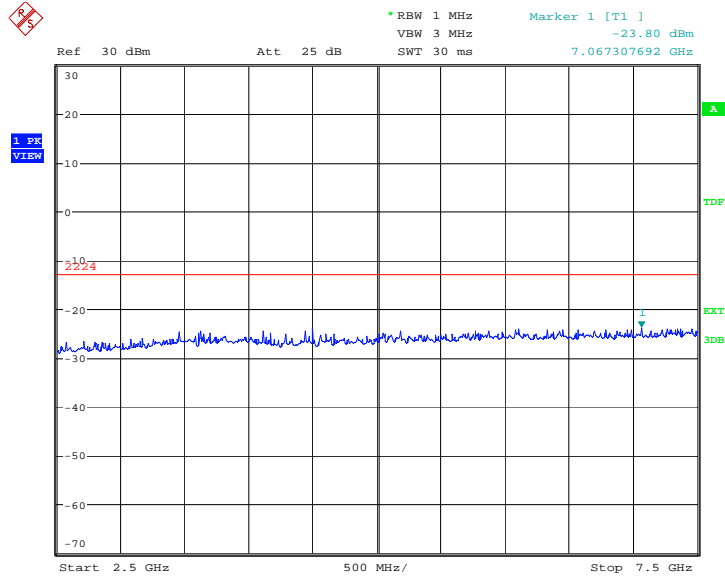


Date: 21.DEC.2012 07:42:26

A.8.3.34 Channel 1450: 7.5GHz –10GHz
Spurious emission limit –13dBm.

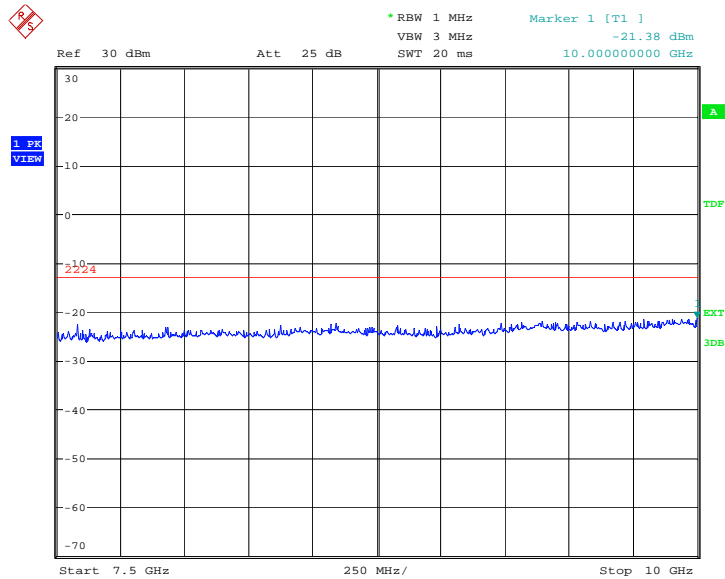


Date: 21.DEC.2012 07:42:54

A.8.3.35 Channel 1450: 10GHz –15GHz
Spurious emission limit –13dBm.

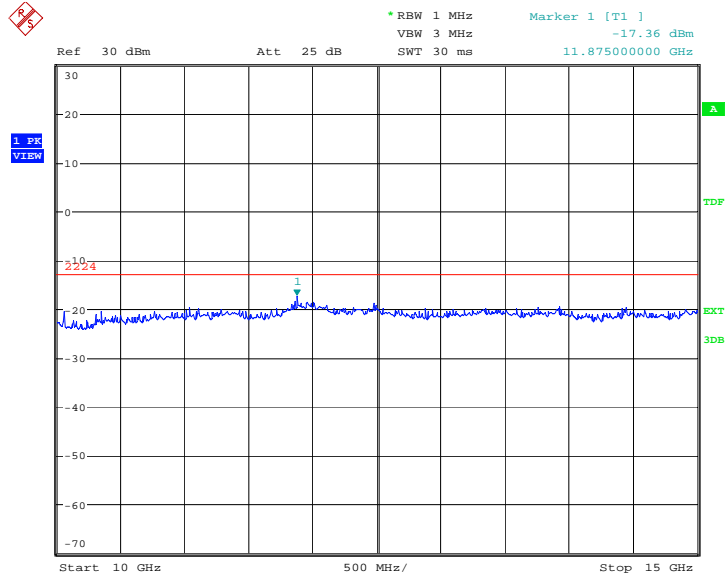


Date: 21.DEC.2012 07:43:23

A.8.3.36 Channel 1450: 15GHz –20GHz
Spurious emission limit –13dBm.

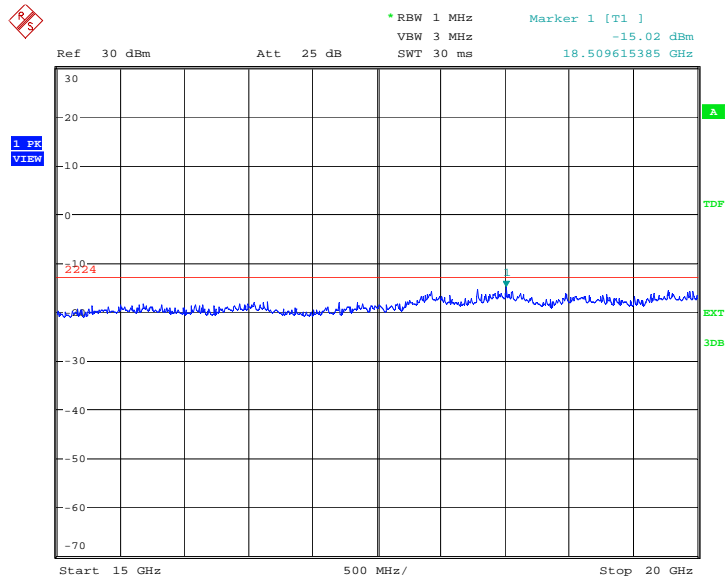

Date: 21.DEC.2012 07:43:51


A.8.3.37 Channel 1513: 30MHz –1GHz
Spurious emission limit –13dBm.

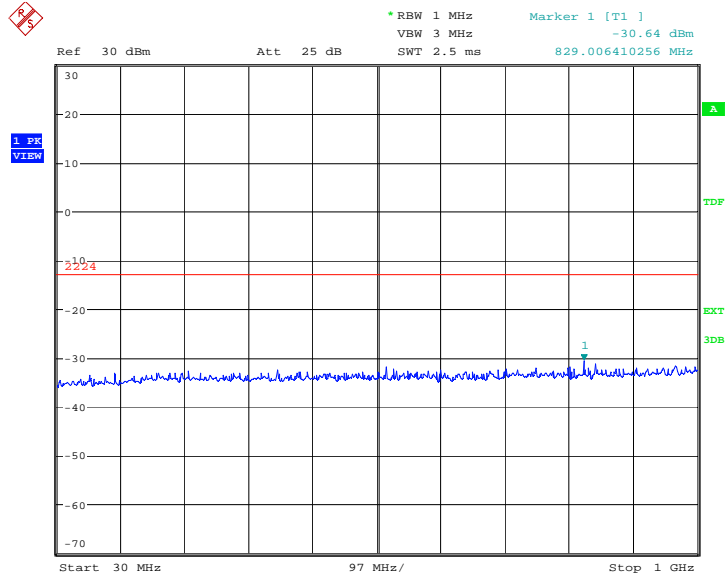

Date: 21.DEC.2012 07:44:22


A.8.3.38 Channel 1513: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

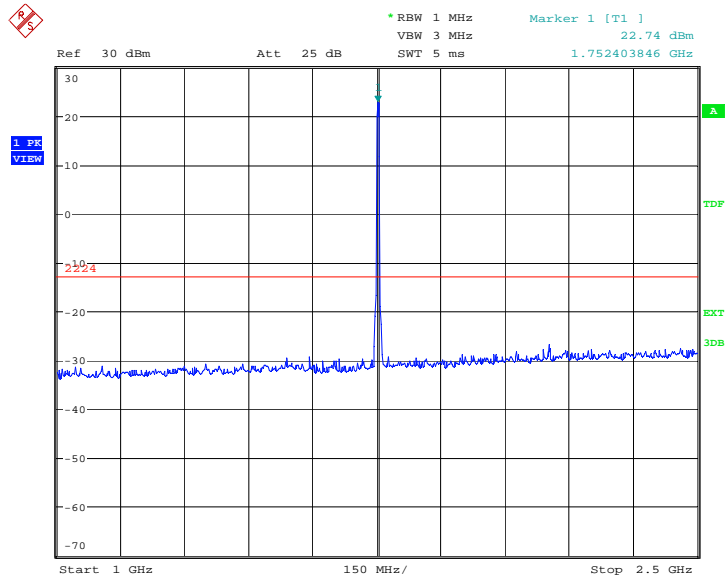


Date: 21.DEC.2012 07:44:50

A.8.3.39 Channel 1513: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

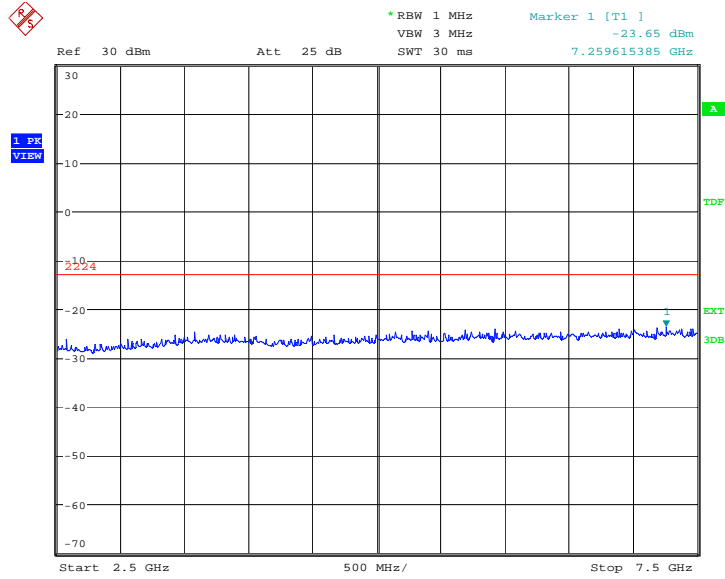


Date: 21.DEC.2012 07:45:18

A.8.3.40 Channel 1513: 7.5GHz –10GHz
Spurious emission limit –13dBm.

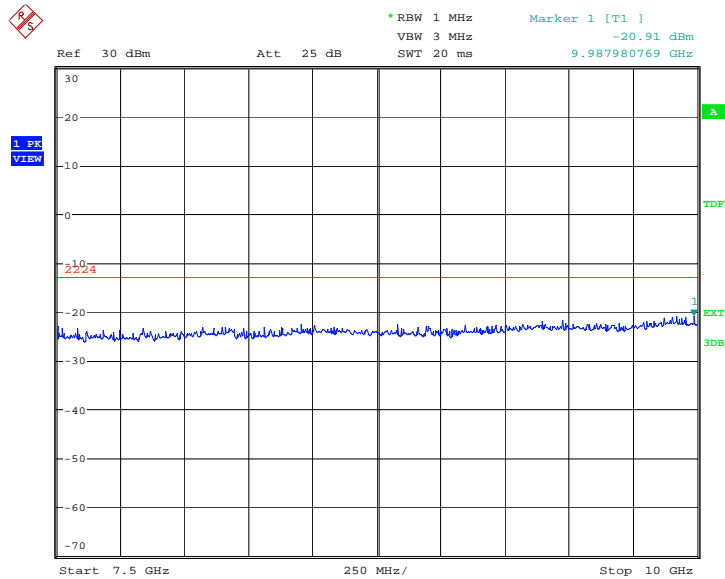


Date: 21.DEC.2012 07:45:47

A.8.3.41 Channel 1513: 10GHz –15GHz
Spurious emission limit –13dBm.

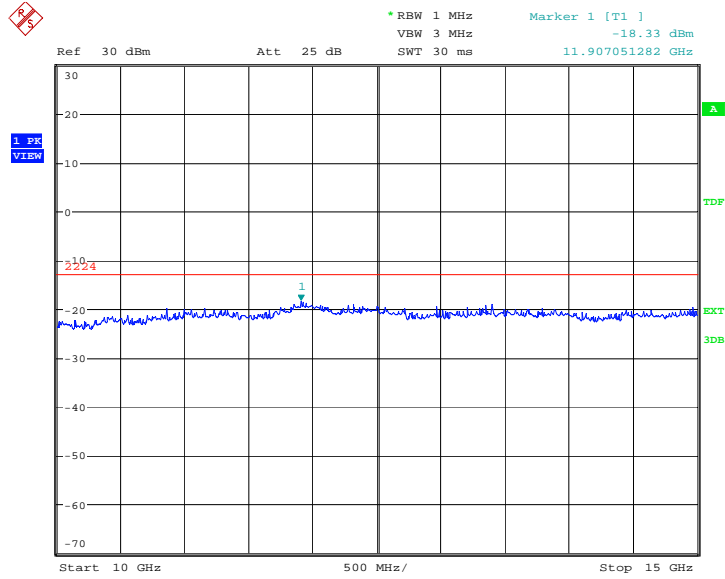


Date: 21.DEC.2012 07:46:15

A.8.3.42 Channel 1513: 15GHz –20GHz
Spurious emission limit –13dBm.

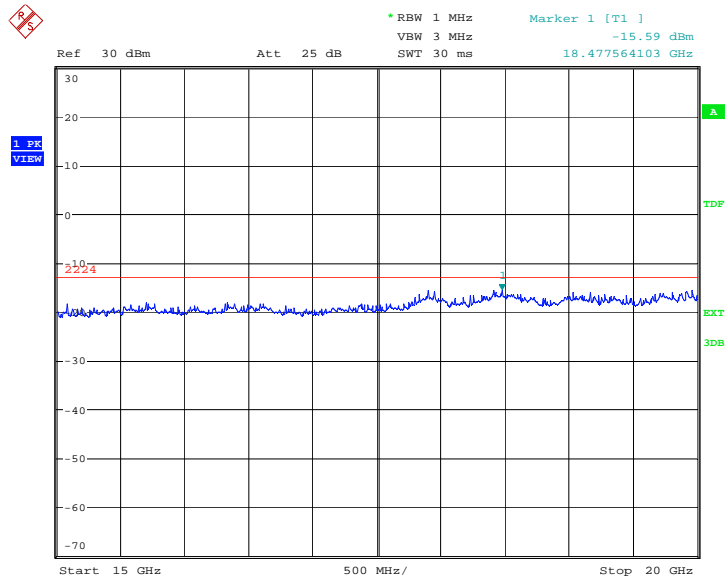


Date: 21.DEC.2012 07:46:43

A.8.3.43 Idle mode: 30MHz –1GHz
Spurious emission limit –13dBm.

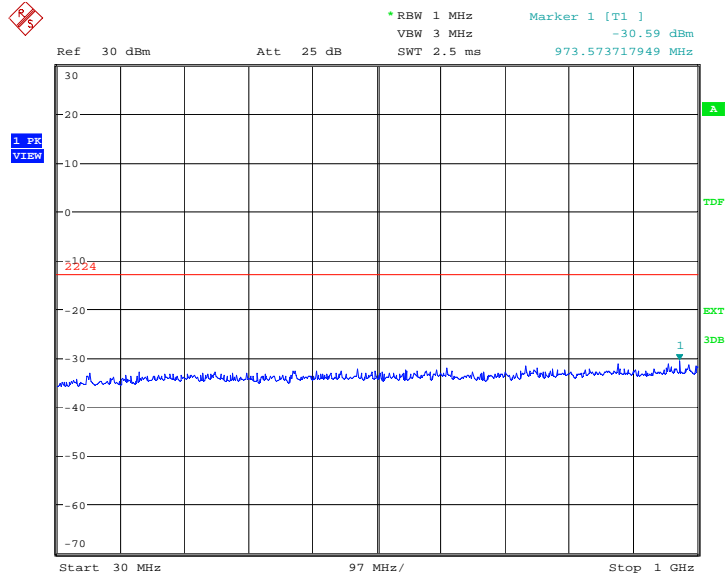


Date: 21.DEC.2012 07:47:12

A.8.3.44 Idle mode: 1GHz –2.5GHz
Spurious emission limit –13dBm.

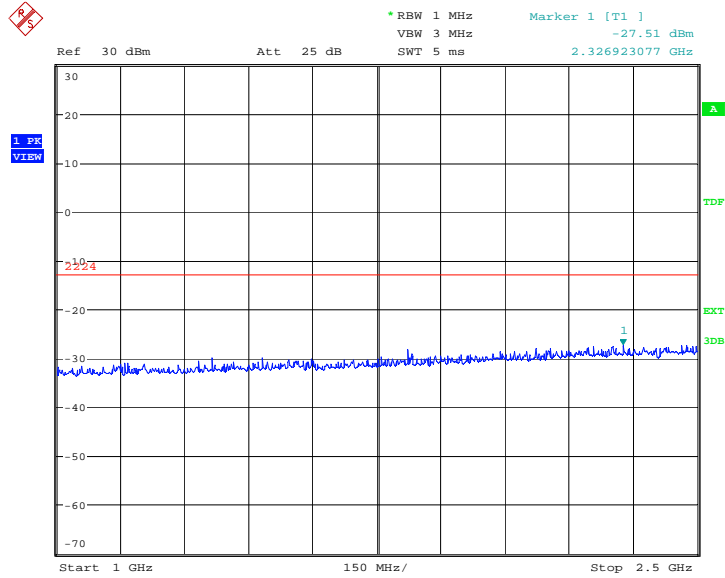


Date: 21.DEC.2012 07:47:40

A.8.3.45 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

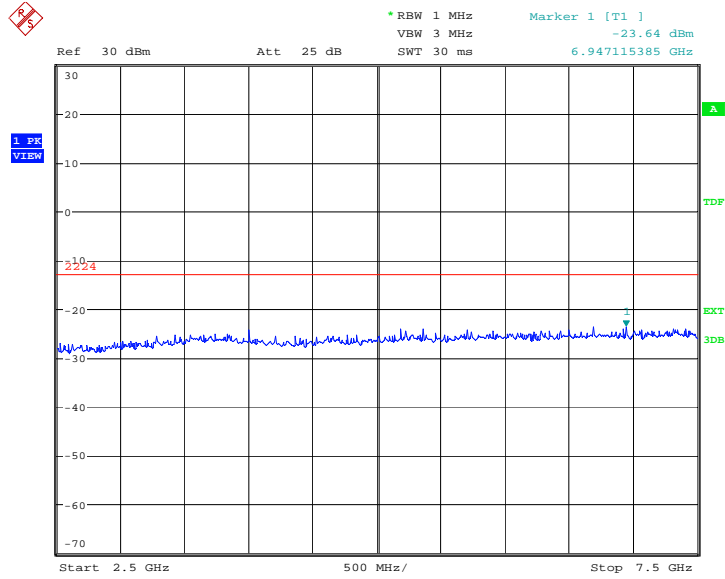


Date: 21.DEC.2012 07:48:09

A.8.3.46 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

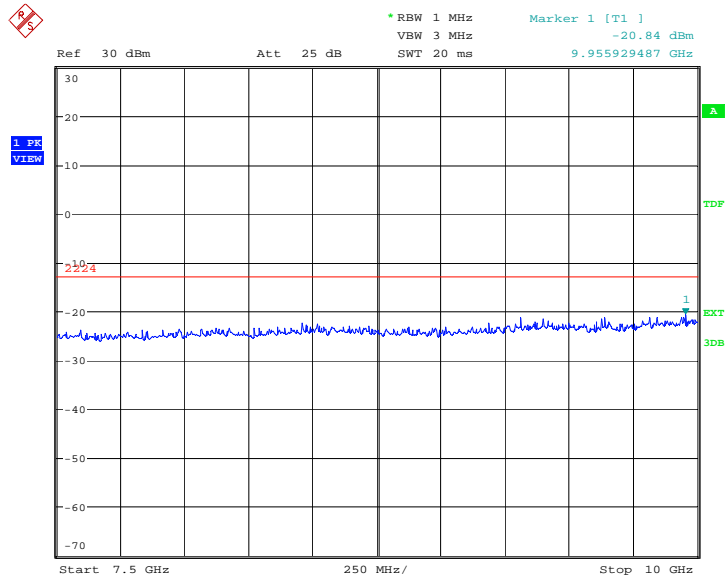


Date: 21.DEC.2012 07:48:37

A.8.3.47 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

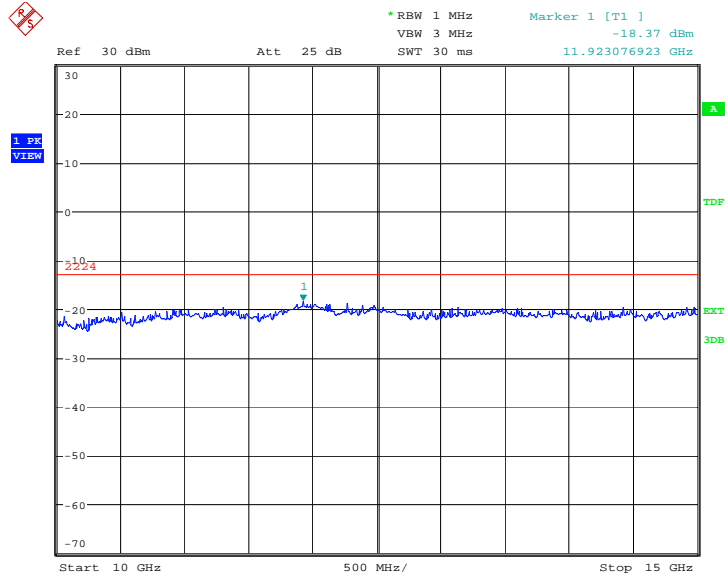

Date: 21.DEC.2012 07:49:05

A.8.3.48 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

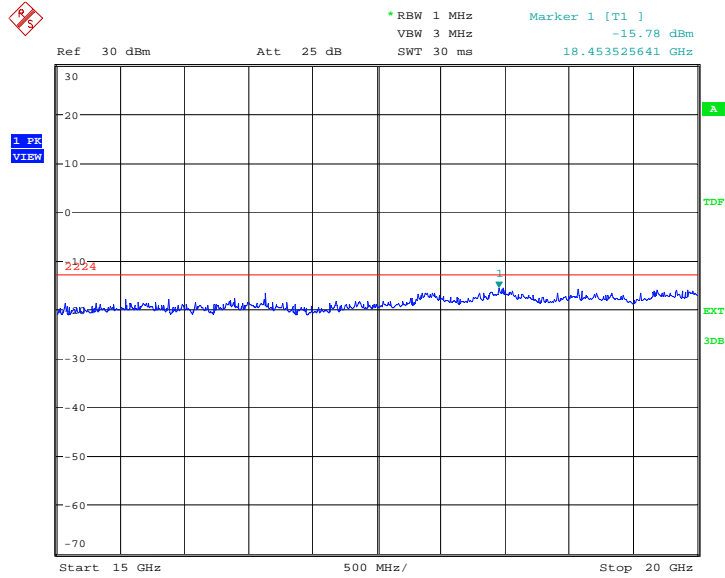


Date: 21.DEC.2012 07:49:33

WCDMA Band V

A.8.3.49 Channel 4132: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

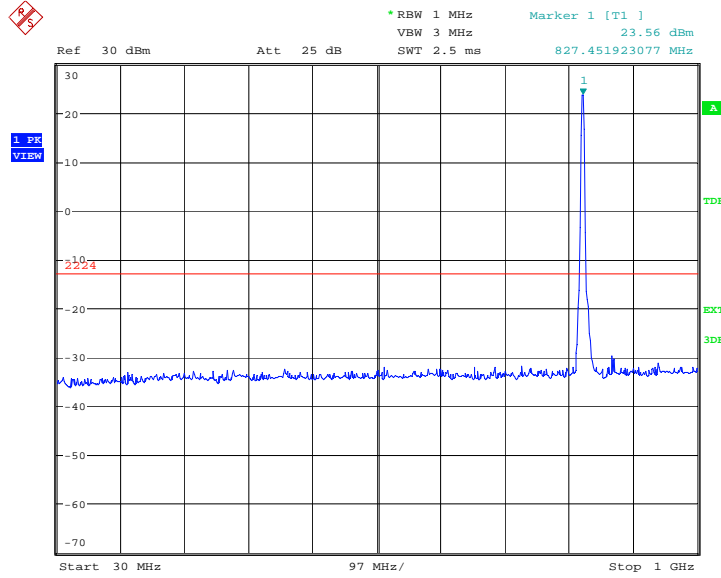

Date: 21.DEC.2012 07:57:08


A.8.3.50 Channel 4132: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

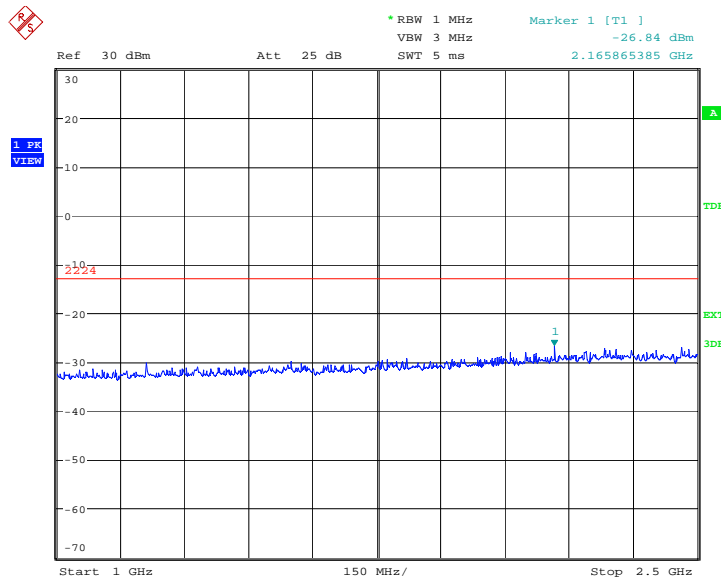


Date: 21.DEC.2012 07:57:37

A.8.3.51 Channel 4132: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

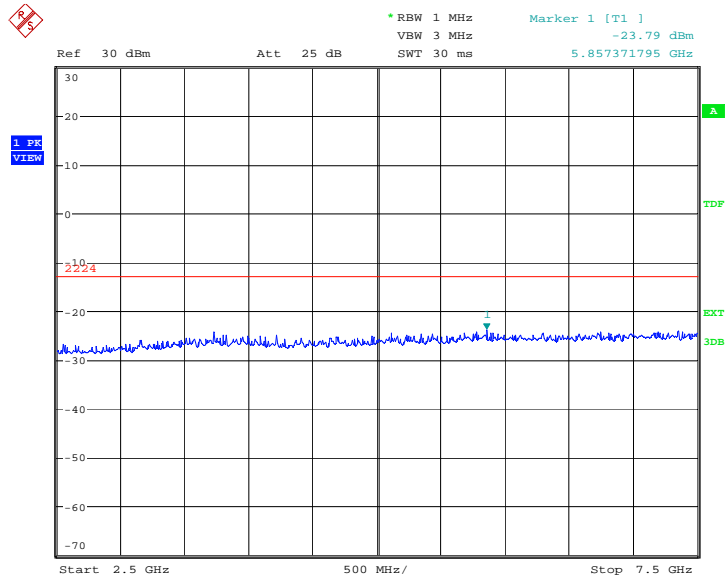

Date: 21.DEC.2012 07:58:05

A.8.3.52 Channel 4132: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

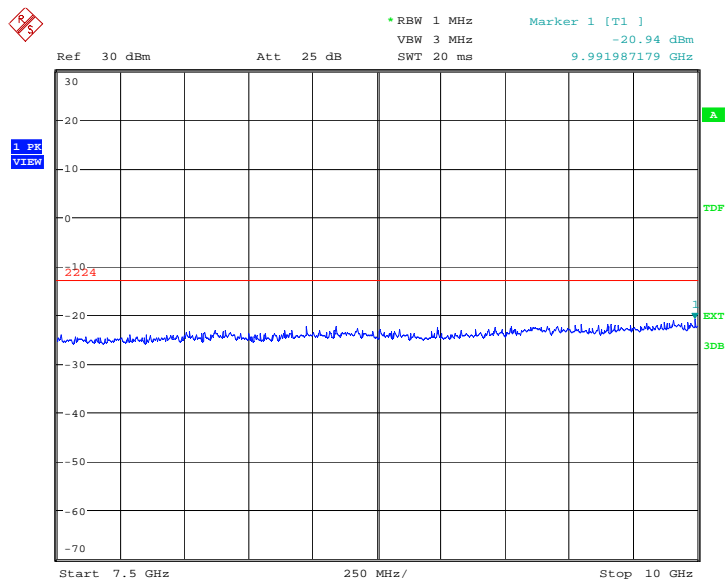


Date: 21.DEC.2012 07:58:33

A.8.3.53 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

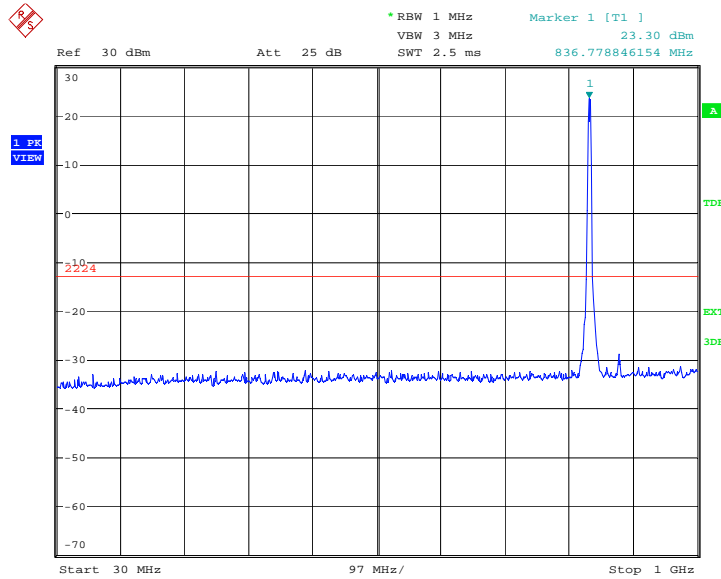

Date: 21.DEC.2012 07:59:04


A.8.3.54 Channel 4183: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

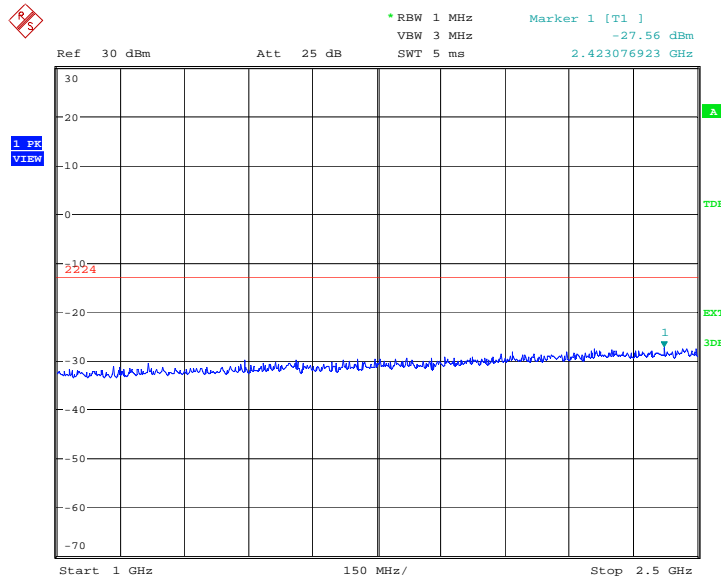


Date: 21.DEC.2012 07:59:32

A.8.3.55 Channel 4183: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

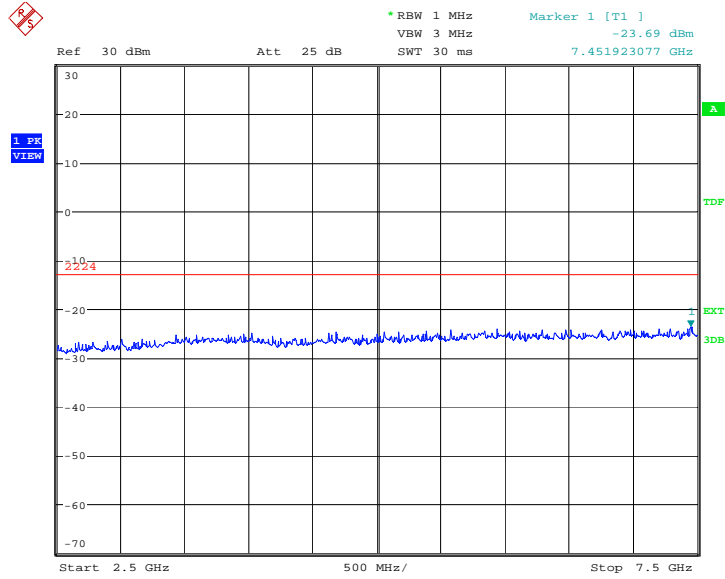

Date: 21.DEC.2012 08:00:00

A.8.3.56 Channel 4183: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

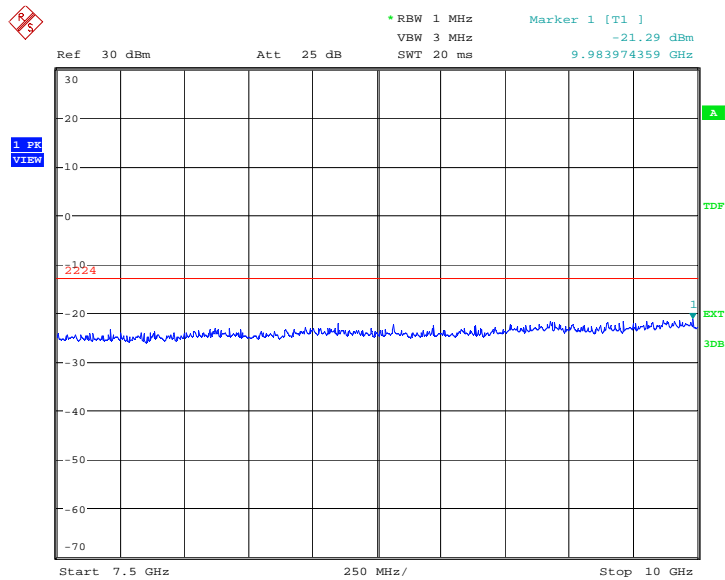


Date: 21.DEC.2012 08:00:29

A.8.3.57 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

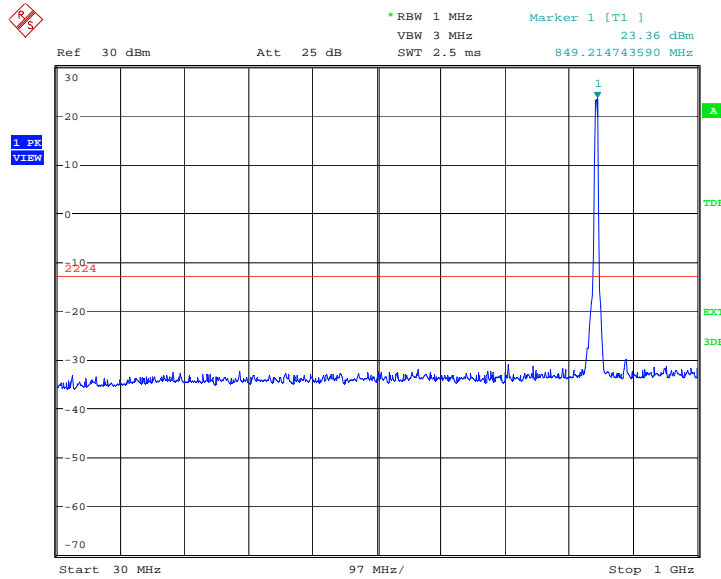

Date: 21.DEC.2012 08:01:00


A.8.3.58 Channel 4233: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

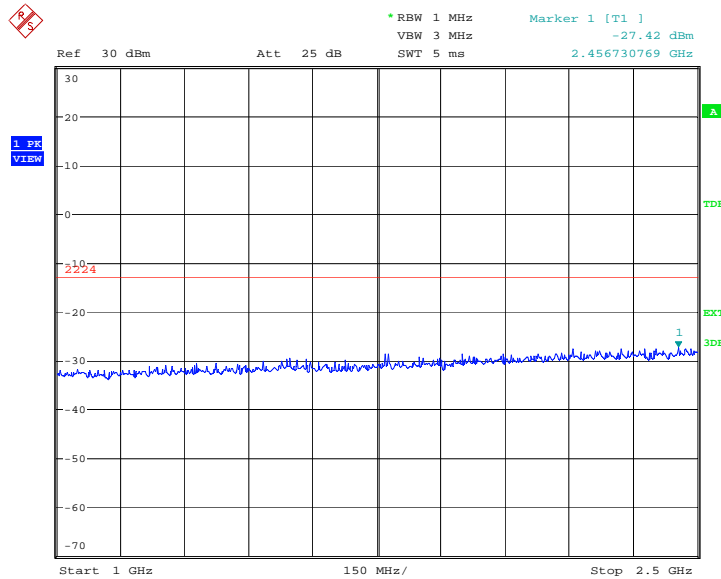


Date: 21.DEC.2012 08:01:28

A.8.3.59 Channel 4233: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

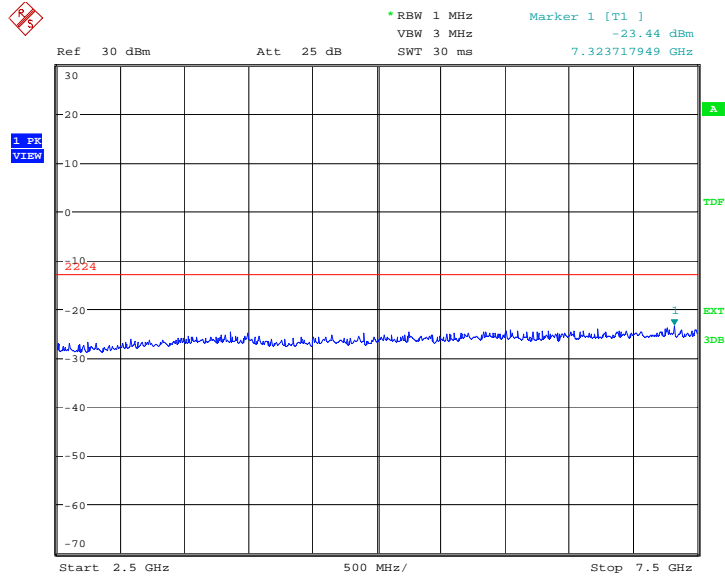


Date: 21.DEC.2012 08:01:56

A.8.3.60 Channel 4233: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

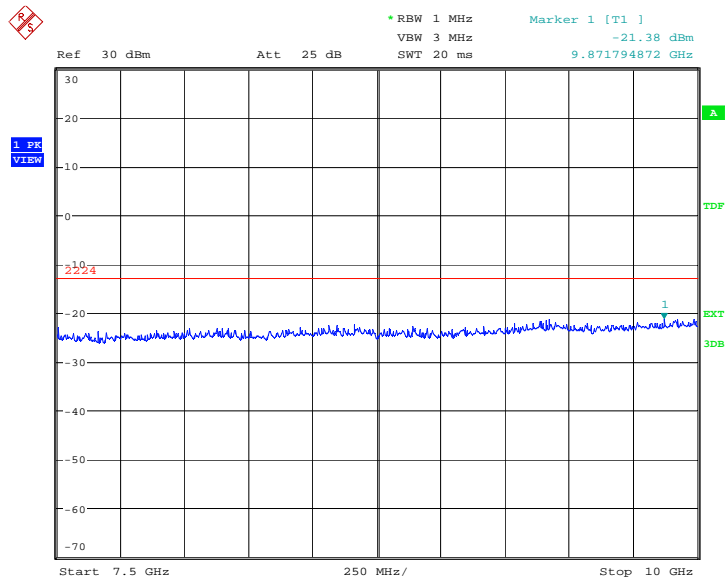


Date: 21.DEC.2012 08:02:24

A.8.3.61 Idle mode: 30MHz – 1GHz
Spurious emission limit -13dBm.

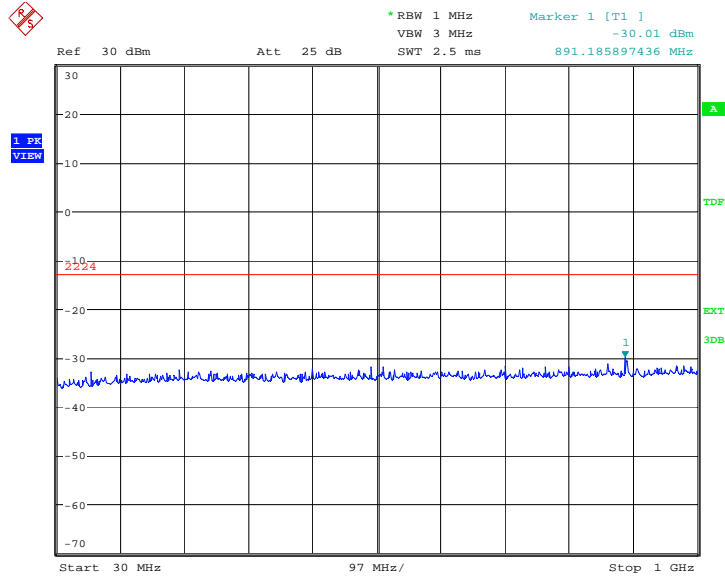


Date: 21.DEC.2012 08:02:54

A.8.3.62 Idle mode: 1GHz – 2.5GHz
Spurious emission limit -13dBm.

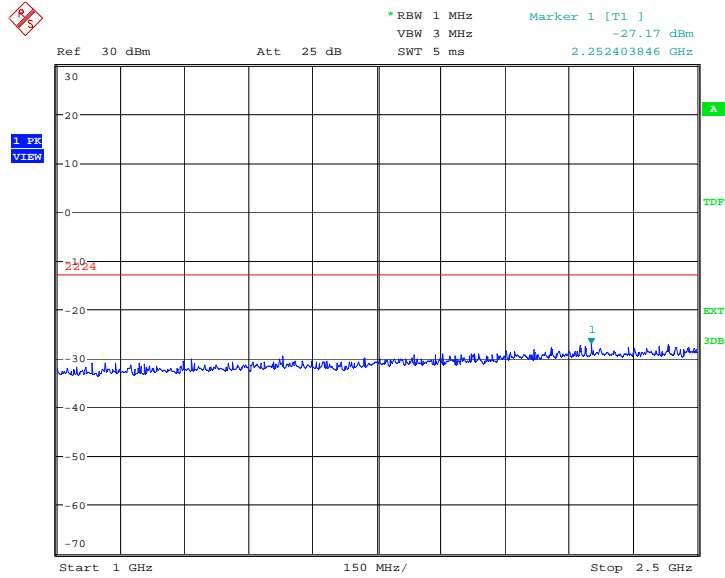


Date: 21.DEC.2012 08:03:22

A.8.3.63 Idle mode: 2.5GHz – 7.5GHz
Spurious emission limit -13dBm.

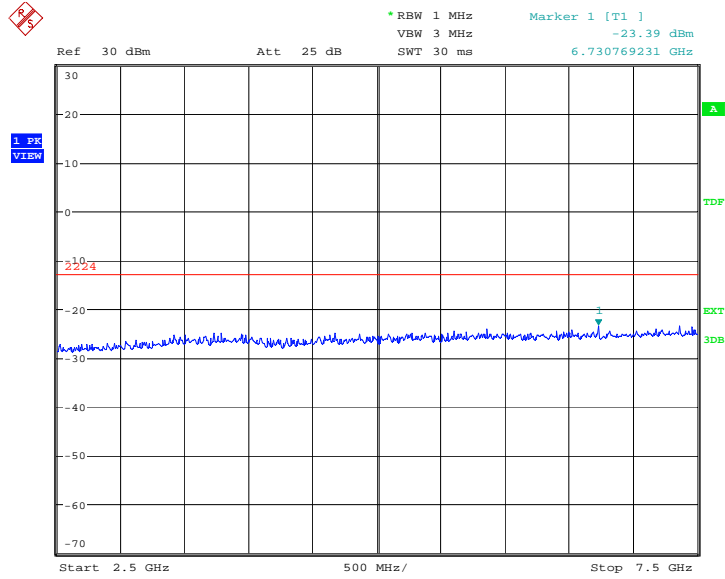

Date: 21.DEC.2012 08:03:50

A.8.3.64 Idle mode: 7.5GHz – 10GHz
Spurious emission limit -13dBm.

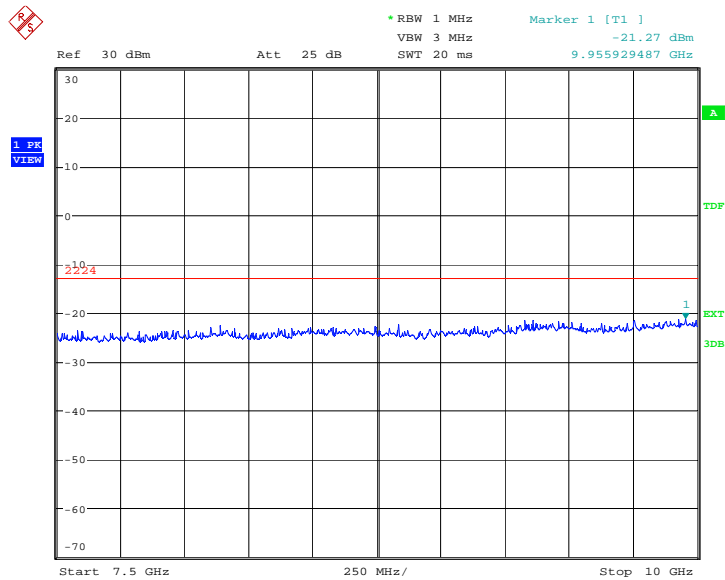

Date: 21.DEC.2012 08:04:18

END OF REPORT