



# TEST REPORT

No. 2012TAR574

for

**TCT Mobile Limited**

**GSM/EGPRS Quadband mobile phone**

**Model Name: Conet 2SIM**

**Marketing Name: ONE TOUCH 815D**

**FCC ID: RAD309**

with

**Hardware Version: PIO**

**Software Version: V321**

**Issued Date: Nov.28, 2012**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629B-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcom@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>3</b>
<b>1.1. TESTING LOCATION.....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT.....</b>	<b>3</b>
<b>1.3. PROJECT DATA.....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>11</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 0086-10-62304633-2561  
Fax: 0086-10-62304633-2504

### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Oct. 11<sup>th</sup>, 2012  
Testing End Date: Oct. 12<sup>th</sup>, 2012

### **1.4. Signature**




---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086 21 61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086 21 61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM/EGPRS Quadband mobile phone
Model Name	Conet 2SIM
Marketing Name	ONE TOUCH 815D
FCC ID	RAD309
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China. The EUT is a variant model of ONE TOUCH 815. All the result is coming from the initial model.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	866664010006464	PIO	V321

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN
AE1	Battery	B097156A26A
AE2	Battery	BAK2011110800333
AE3	Travel Adapter	/
AE4	USB Cable	/
AE5	USB Cable	/
AE6	USB Cable	/
AE7	USB Cable	/

##### AE1

Model	CAB3120000C1
Manufacturer	BYD
Capacitance	850 mAh
Nominal Voltage	3.7 V

##### AE2

Model	CAB3120000C3
Manufacturer	BAK
Capacitance	850 mAh
Nominal Voltage	3.7 V

##### AE3

Model	CBA3120AG0C2
Manufacturer	Tenpao
Length of cable	120 cm

##### AE4

Model	CDA3122002C1
Manufacturer	Juwei
Length of cable	150cm

AE5

Model	CDA3122002C2
Manufacturer	Shenhua
Length of cable	150cm

AE6

Model	CDA3122005C1
Manufacturer	Juwei
Length of cable	150cm

AE7

Model	CDA3122005C2
Manufacturer	Shenhua
Length of cable	150cm

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-10 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-2** (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz

**Control room/ conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
5	Test Receiver	ESCI	100344	R&S	2013-03-28
6	Universal Radio Communication Tester	CMU200	100680	R&S	2013-09-05
7	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-07
8	PC	OPTIPLEX 755	3908243625	DELL	N/A
9	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A
10	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
11	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-4000	1MHz/1MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.


### Charging Mode

Frequency(MHz)	Result(dBuV/m)	$G_{\text{PL}}$ (dB)	$G_A$ (dB/m)	$P_{\text{Mea}}$ (dBuV)	Polarity
2794.200	44.4	-26.3	33.3	37.438	Horizontal
2795.400	44.4	-26.3	33.3	37.438	Horizontal
2805.200	44.4	-27.6	33.8	38.241	Horizontal
2779.800	44.4	-26.3	33.3	37.438	Vertical
2797.600	44.4	-26.3	33.3	37.438	Vertical
2804.000	44.4	-27.6	33.8	38.241	Vertical


### USB Mode

Frequency(MHz)	Result(dBuV/m)	$G_{\text{PL}}$ (dB)	$G_A$ (dB/m)	$P_{\text{mea}}$ (dBuV)	Polarity
3000.000	45.2	-28.4	34.1	39.472	Horizontal
2792.800	44.5	-26.3	33.3	37.538	Horizontal
2798.200	44.4	-26.3	33.3	37.438	Vertical
2783.200	44.4	-26.3	33.3	37.438	Vertical
2793.200	44.4	-26.3	33.3	37.438	Horizontal
2789.800	44.4	-26.3	33.3	37.438	Horizontal


**Charging Mode**

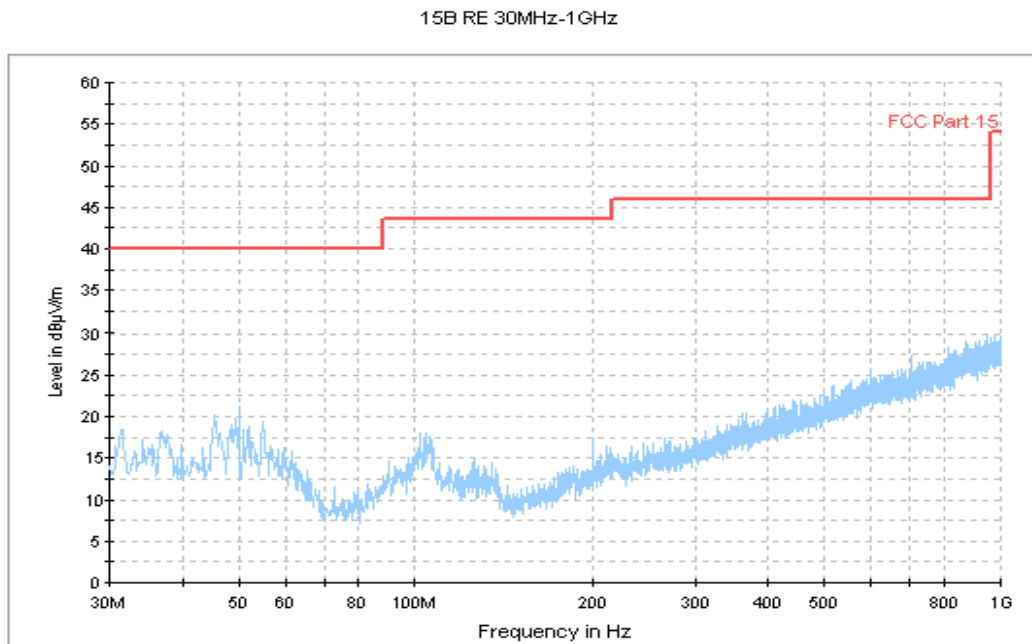

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

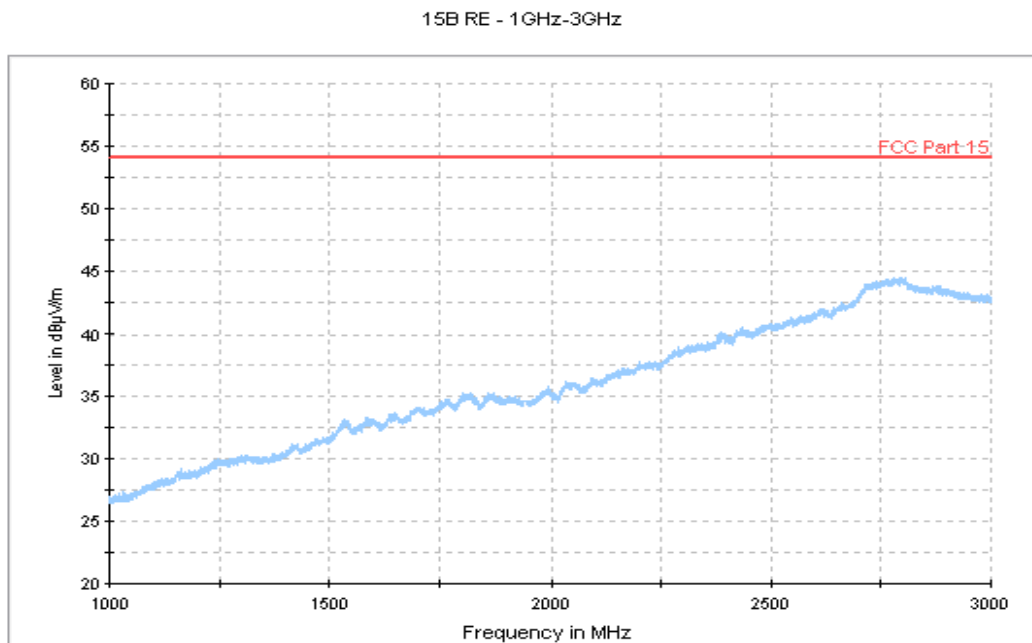


**Figure A.2 Radiated Emission from 1GHz to 3GHz**

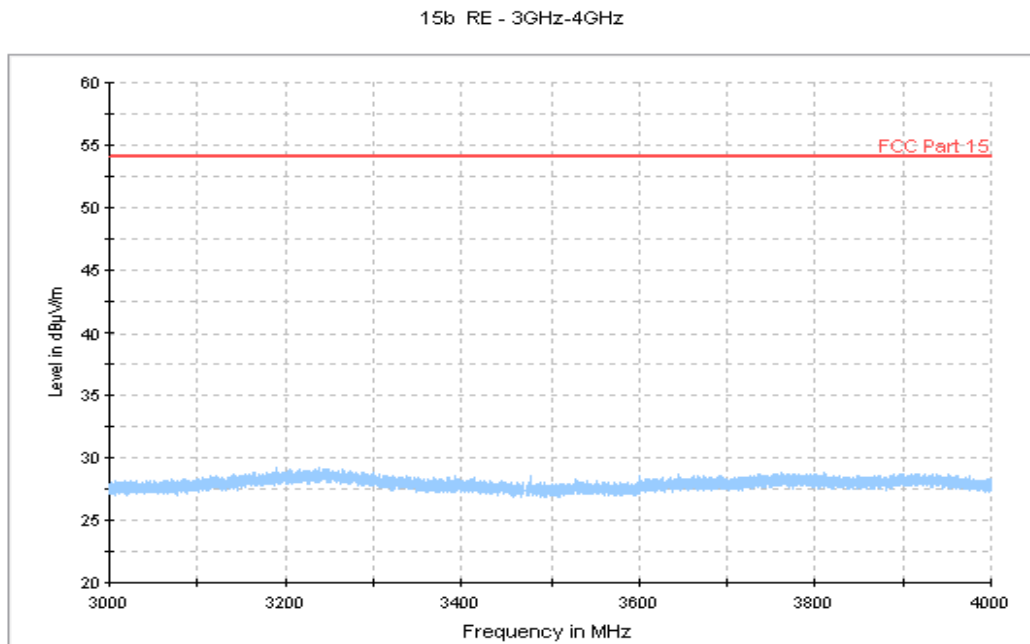


**Figure A.3 Radiated Emission from 3GHz to 4GHz**


**USB Mode**

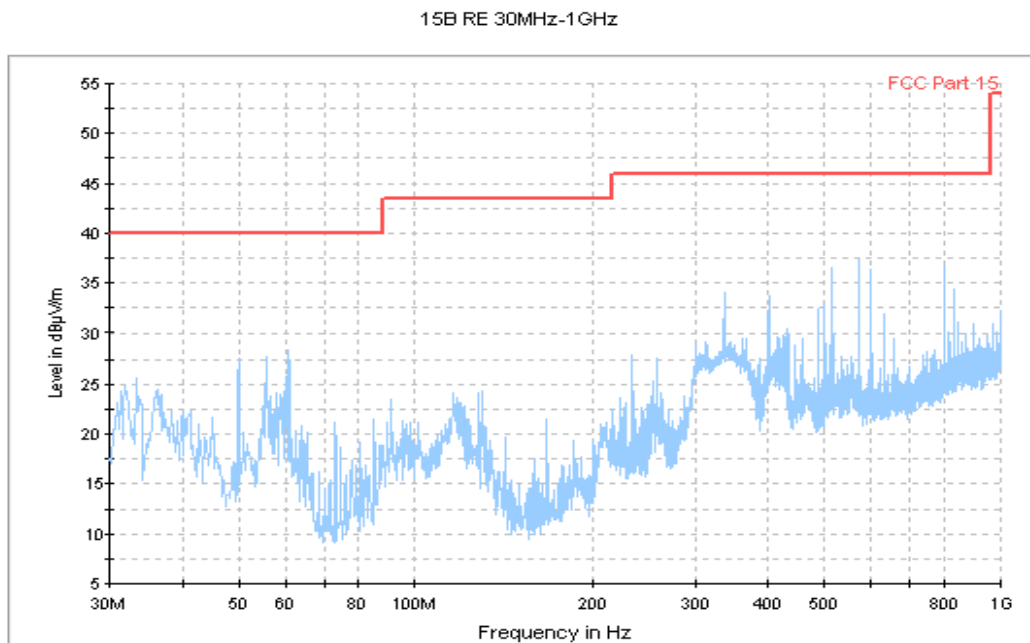

**Figure A.4 Radiated Emission from 30MHz to 1GHz**

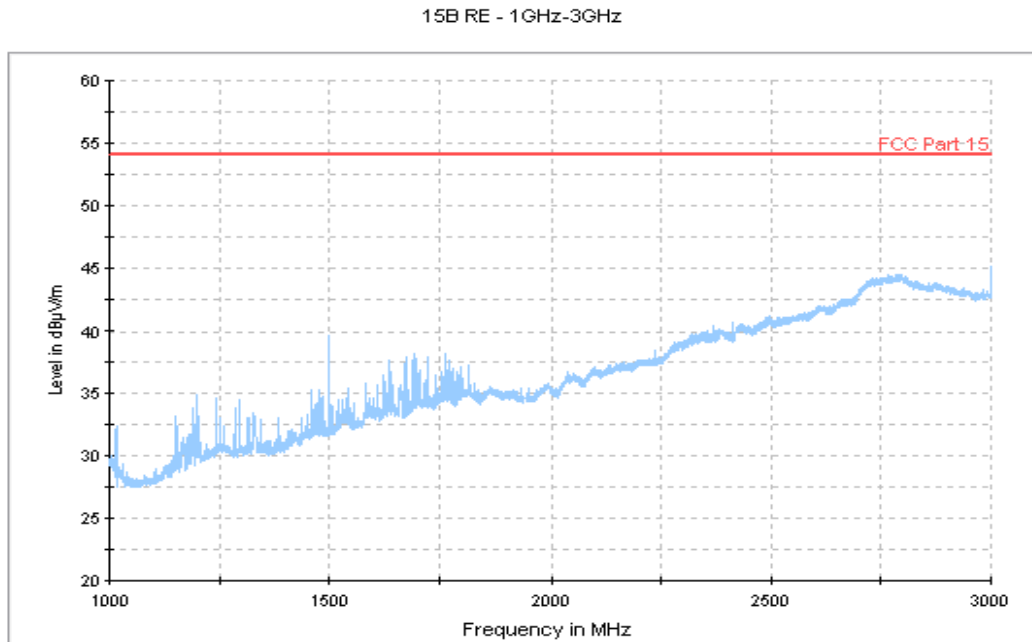

**Figure A.5 Radiated Emission from 1GHz to 3GHz**

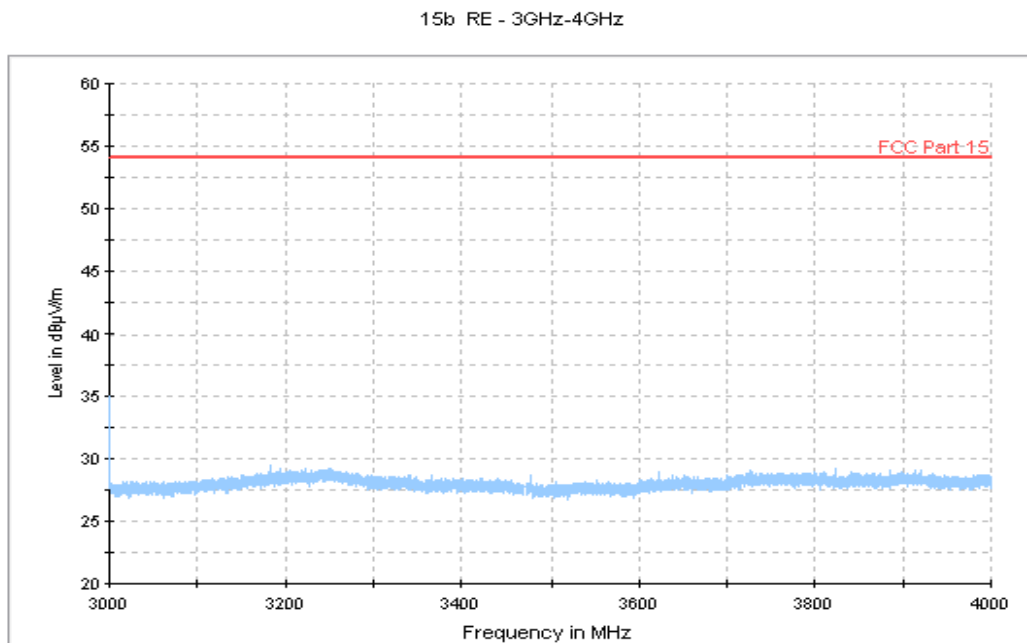

**Figure A.6 Radiated Emission from 3GHz to 4GHz**

## A.2 Conducted Emission (§15.107(a))

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

### A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency


### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1



**A.2.5 Measurement Results**  
**Charging Mode**

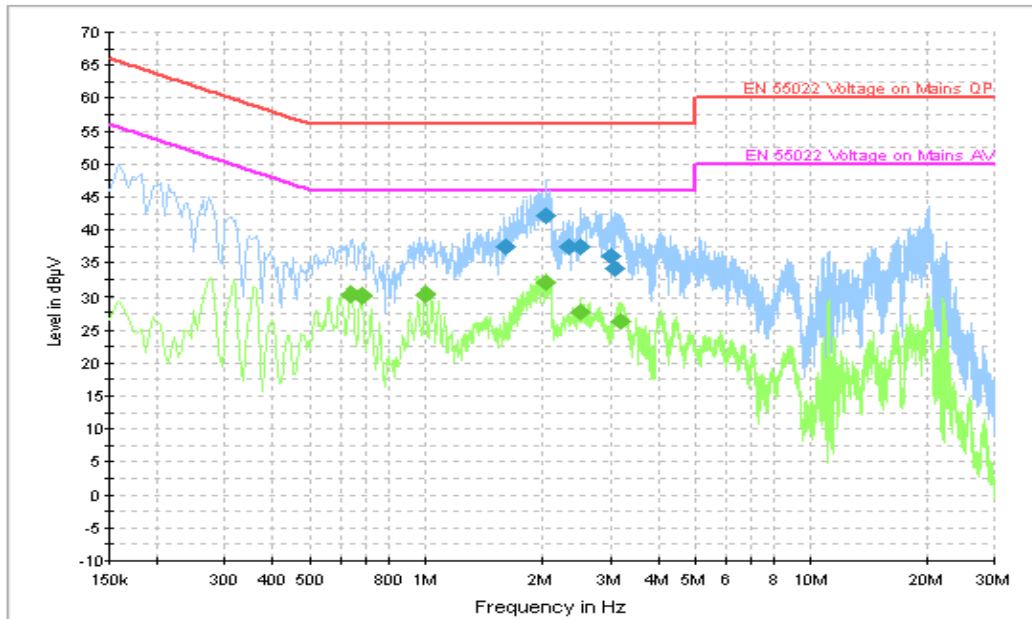

**Figure A.7 Conducted Emission**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.608000	37.4	GND	L1	10.0	18.6	56.0
2.040000	42.1	GND	L1	10.0	13.9	56.0
2.346000	37.4	GND	N	10.0	18.6	56.0
2.503500	37.5	GND	L1	10.0	18.5	56.0
3.007500	36.0	GND	L1	10.0	20.0	56.0
3.075000	34.2	GND	L1	10.0	21.8	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.640500	30.3	GND	N	10.0	15.7	46.0
0.681000	30.1	GND	N	10.0	15.9	46.0
0.996000	30.5	GND	N	10.0	15.5	46.0
2.040000	32.0	GND	L1	10.0	14.0	46.0
2.512500	27.8	GND	L1	10.0	18.2	46.0
3.201000	26.4	GND	N	10.0	19.6	46.0

USB Mode

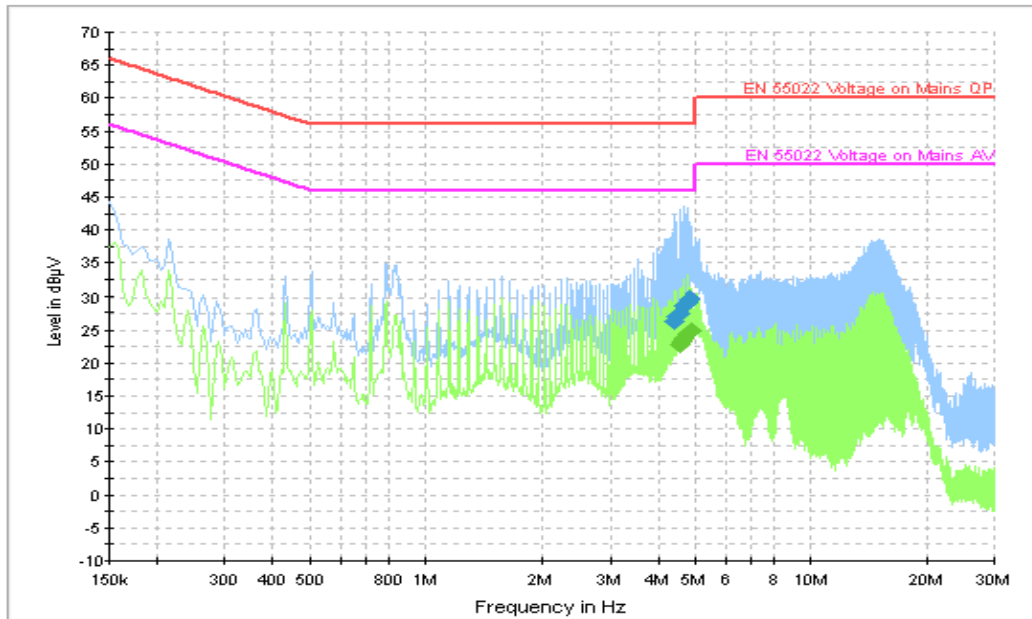


Figure A.8 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.393500	26.3	GND	N	10.0	29.7	56.0
4.465500	27.0	GND	N	10.0	29.0	56.0
4.537500	27.5	GND	N	10.0	28.5	56.0
4.686000	28.7	GND	N	10.0	27.3	56.0
4.758000	29.2	GND	N	10.0	26.8	56.0
4.830000	29.6	GND	N	10.0	26.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.542000	22.9	GND	N	10.0	23.1	46.0
4.614000	23.3	GND	N	10.0	22.7	46.0
4.686000	23.8	GND	N	10.0	22.2	46.0
4.758000	24.4	GND	N	10.0	21.6	46.0
4.830000	24.8	GND	N	10.0	21.2	46.0
4.902000	24.8	GND	N	10.0	21.2	46.0

\*\*\*END OF REPORT\*\*\*