



# SAR TEST REPORT

No. 2012SAR00132

For

**TCT Mobile Limited**

**HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone**

**Mode Name: Beetle 2SIM US**

**Marketing Name: ONE TOUCH 4030E**

With

**Hardware Version: proto**

**Software Version: vFA2**

**FCCID: RAD316**

**Issued Date: 2012-12-27**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. [www.emcite.com](http://www.emcite.com)

### Revision Version

<b>Report Number</b>	<b>Revision</b>	<b>Date</b>	<b>Memo</b>
2012SAR00132	00	2012-12-22	Initial creation of test report
2012SAR00132	01	2012-12-27	Update the evaluation of simultaneous transmission for BT and WiFi antenna

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>5</b>
1.1 TESTING LOCATION .....	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA .....	5
1.4 SIGNATURE.....	5
<b>2 STATEMENT OF COMPLIANCE .....</b>	<b>6</b>
<b>3 CLIENT INFORMATION .....</b>	<b>7</b>
3.1 APPLICANT INFORMATION .....	7
3.2 MANUFACTURER INFORMATION .....	7
<b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
4.1 ABOUT EUT .....	8
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
<b>5 TEST METHODOLOGY .....</b>	<b>9</b>
5.1 APPLICABLE LIMIT REGULATIONS .....	9
5.2 APPLICABLE MEASUREMENT STANDARDS.....	9
<b>6 SPECIFIC ABSORPTION RATE (SAR).....</b>	<b>10</b>
6.1 INTRODUCTION.....	10
6.2 SAR DEFINITION.....	10
<b>7 SAR MEASUREMENT SETUP .....</b>	<b>11</b>
7.1 MEASUREMENT SET-UP .....	11
7.2 DASY4 OR DASY5 E-FIELD PROBE SYSTEM .....	12
7.3 E-FIELD PROBE CALIBRATION .....	12
7.4 OTHER TEST EQUIPMENT .....	13
7.4.1 DATA ACQUISITION ELECTRONICS(DAE).....	13
7.4.2 ROBOT.....	14
7.4.3 MEASUREMENT SERVER.....	14
7.4.4 DEVICE HOLDER FOR PHANTOM.....	15
7.4.5 PHANTOM.....	16
<b>8. POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .....</b>	<b>17</b>
8.1 GENERAL CONSIDERATIONS.....	17
8.2 BODY-WORN DEVICE .....	18
8.3 DESKTOP DEVICE.....	18
8.4 DUT SETUP PHOTOS .....	20
<b>9 TISSUE SIMULATING LIQUIDS .....</b>	<b>21</b>
9.1 EQUIVALENT TISSUES.....	21
9.2 DIELECTRIC PERFORMANCE .....	21

<b>10 SYSTEM VALIDATION</b> .....	<b>23</b>
10.1 SYSTEM VALIDATION.....	23
10.2 SYSTEM SETUP.....	23
<b>11 MEASUREMENT PROCEDURES</b> .....	<b>25</b>
11.1 TESTS TO BE PERFORMED.....	25
11.2 MEASUREMENT PROCEDURE.....	26
11.3 WCDMA MEASUREMENT PROCEDURES FOR SAR.....	27
11.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR .....	28
11.5 POWER DRIFT .....	28
<b>12 CONDUCTED OUTPUT POWER</b> .....	<b>29</b>
12.1 GSM MEASUREMENT RESULT .....	29
12.2 WCDMA MEASUREMENT RESULT .....	30
12.3 WI-FI AND BT MEASUREMENT RESULT .....	30
<b>13 SIMULTANEOUS TX SAR CONSIDERATIONS</b> .....	<b>32</b>
13.1 INTRODUCTION.....	32
13.2 TRANSMIT ANTENNA SEPARATION DISTANCES .....	32
13.3 SIMULTANEOUS TRANSMISSION FOR EUT .....	32
<b>14 SAR TEST RESULT</b> .....	<b>34</b>
14.1 THE EVALUATION OF MULTI-BATTERIES .....	34
14.1 SAR TEST RESULT .....	34
<b>15 MEASUREMENT UNCERTAINTY</b> .....	<b>38</b>
<b>16 MAIN TEST INSTRUMENTS</b> .....	<b>39</b>
<b>ANNEX A GRAPH RESULTS</b> .....	<b>40</b>
<b>ANNEX B SYSTEM VALIDATION RESULTS</b> .....	<b>156</b>
<b>ANNEX C PROBE CALIBRATION CERTIFICATE</b> .....	<b>162</b>
<b>ANNEX D DIPOLE CALIBRATION CERTIFICATE</b> .....	<b>173</b>
<b>ANNEX E SPOT CHECK TEST</b> .....	<b>197</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China  
Postal Code: 100191  
Telephone: +86-10-62304633  
Fax: +86-10-62304793

### 1.2 Testing Environment

Temperature: 18°C~25 °C,  
Relative humidity: 30%~ 70%  
Ground system resistance: < 0.5 Ω  
Ambient noise & Reflection: < 0.012 W/kg

### 1.3 Project Data


Project Leader: Qi Dianyuan  
Test Engineer: Lin Xiaojun  
Testing Start Date: December 12, 2012  
Testing End Date: December 14, 2012

### 1.4 Signature




---

Lin Xiaojun  
(Prepared this test report)

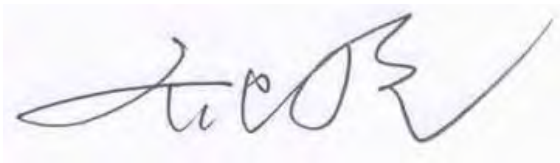

---

Qi Dianyuan  
(Reviewed this test report)



---

Xiao Li  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.2012SAR00131.

According to the client request, we quote the test results of report, No.2012SAR00131, for table 14.1 to 14.12. The results of spot check are presented in the annex E.

The maximum results of Specific Absorption Rate (SAR) found during testing for TCT Mobile Limited HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone Beetle 2SIM US / ONE TOUCH 4030E are as follows ( with expanded uncertainty 18.5%)

**Table 2.1: Max. SAR Measured (1g)**

Band	Position	SAR 1g (W/Kg)
GSM 850	Head	0.808
	Body	1.05
GSM 1900	Head	0.579
	Body	0.919
WCDMA 850	Head	0.690
	Body	1.01
WCDMA 1900	Head	1.18
	Body	1.14
Wi-Fi	Head	0.575
	Body	0.177

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in chapter 7 of this test report. A detailed description of the equipment under test can be found in chapter 3 of this test report. The maximum SAR value is obtained at the case of (**Table 2.1**), and the values are: **1.18 (1g)**.

### 3 Client Information

#### 3.1 Applicant Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: ShangHai  
Postal Code: 201203  
Country: P.R.China  
Contact: Gong Zhizhou  
Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

#### 3.2 Manufacturer Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: ShangHai  
Postal Code: 201203  
Country: P.R.China  
Contact: Gong Zhizhou  
Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Description:	HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone
Model name:	Beetle 2SIM US
Marketing name:	ONE TOUCH 4030E
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1900/2100, BT, Wi-Fi 825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900)
Tested Tx Frequency:	826.4 – 846.6(WCDMA 850) 1852.4 – 1907.6(WCDMA 1900) 2412 – 2462 MHz (Wi-Fi)
GPRS Multislot Class:	12
GPRS capability Class:	B
EGPRS Multislot Class:	12
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	11.5cm × 6.2 cm

### 4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	013460000051210 / 013460000050535	proto	vFA2

\*EUT ID: is used to identify the test sample in the lab internally.

### 4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB60B0000C1	\	BYD
AE2	Battery	CAB60B0000C2	\	BAK
AE3	Headset	CCB3160A11C1	\	Juwei
AE4	Headset	CCB3160A11C2	\	lianyun
AE5	Headset	CCB3160A15C1	\	Juwei
AE6	Headset	CCB3160A15C2	\	lianyun

\*AE ID: is used to identify the test sample in the lab internally.

**Note:** AE3 and AE5 are the same, so they can use the same results. AE4 and AE6 are the same, so they can use the same results.



## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**KDB648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05:** SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.

**KDB248227:** SAR measurement procedures for 802.112abg transmitters.

**KDB941225 :** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 SAR MEASUREMENT SETUP

### 7.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

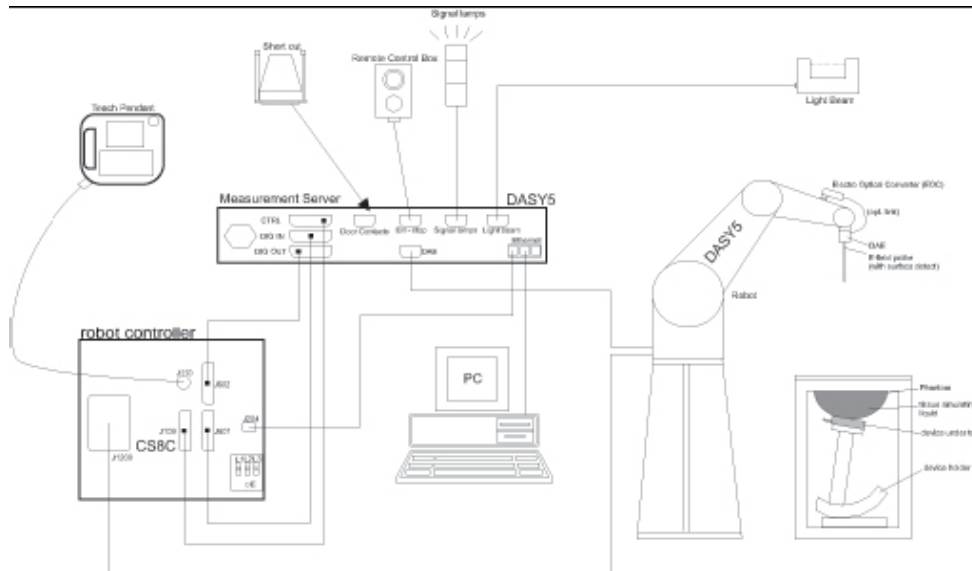

**Picture 7.1 SAR Lab Test Measurement Set-up**

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 7.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2<sup>nd</sup> order curve fitting. The approach is stopped at reaching the maximum.

### Probe Specifications:

<b>Model:</b>	<b>ES3DV3, EX3DV4</b>
<b>Frequency</b>	<b>10MHz — 6.0GHz(EX3DV4)</b>
<b>Range:</b>	<b>10MHz — 4GHz(ES3DV3)</b>
<b>Calibration:</b>	<b>In head and body simulating tissue at Frequencies from 835 up to 5800MHz</b>
<b>Linearity:</b>	<b>± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3</b>
<b>Dynamic Range:</b>	<b>10 mW/kg — 100W/kg</b>
<b>Probe Length:</b>	<b>330 mm</b>
<b>Probe Tip</b>	
<b>Length:</b>	<b>20 mm</b>
<b>Body Diameter:</b>	<b>12 mm</b>
<b>Tip Diameter:</b>	<b>2.5 mm (3.9 mm for ES3DV3)</b>
<b>Tip-Center:</b>	<b>1 mm (2.0mm for ES3DV3)</b>
<b>Application:</b>	<b>SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields</b>



Picture 7.2 Near-field Probe



Picture 7.3 E-field Probe

## 7.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density ( $1 \text{ mW/cm}^2$ ) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm<sup>2</sup>:

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## 7.4 Other Test Equipment

### 7.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Picture7.4: DAE

### 7.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture 7.5 DASY 4



Picture 7.6 DASY 5

### 7.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.





Picture 7.7 Server for DASY 4



Picture 7.8 Server for DASY 5

#### 7.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric


parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture 7.9-1: Device Holder

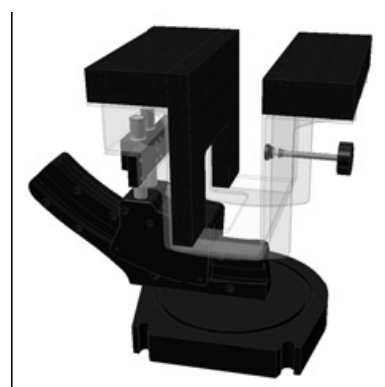

Picture 7.9-2: Laptop Extension Kit

### 7.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90<sup>th</sup> percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness:  $2 \pm 0.2$  mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




**Picture 7.10: SAM Twin Phantom**



## 8. Position of the wireless device in relation to the phantom


### 8.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

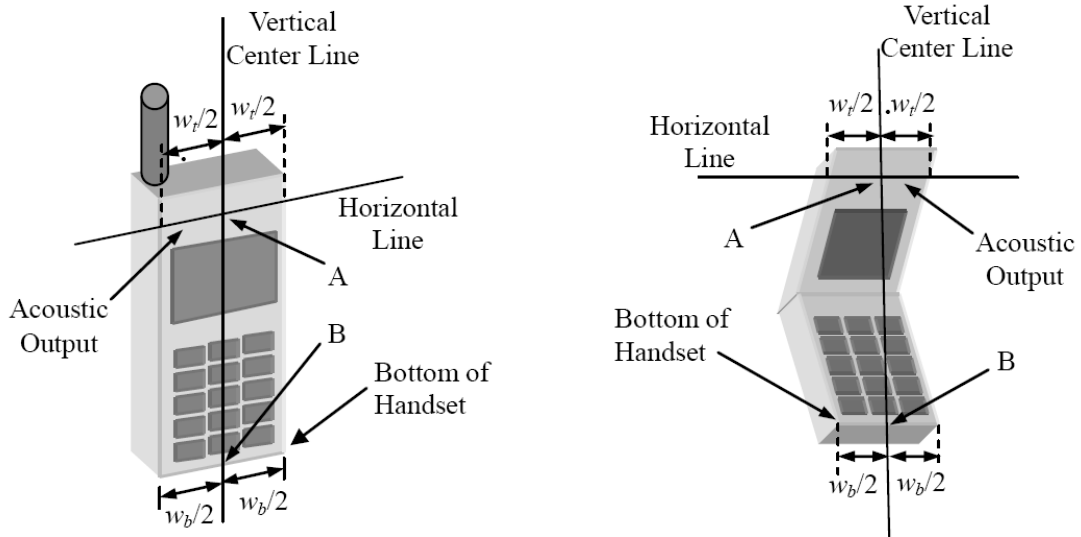


- $w_t$  Width of the handset at the level of the acoustic
- $w_b$  Width of the bottom of the handset
- A Midpoint of the width  $w_t$  of the handset at the level of the acoustic output
- B Midpoint of the width  $w_b$  of the bottom of the handset

Picture 8.1-a Typical “fixed” case handset      Picture 8.1-b Typical “clam-shell” case handset

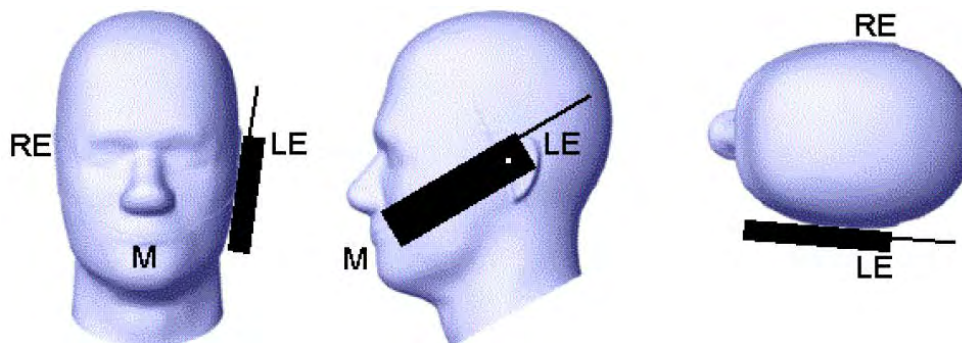


Picture 8.2 Cheek position of the wireless device on the left side of SAM

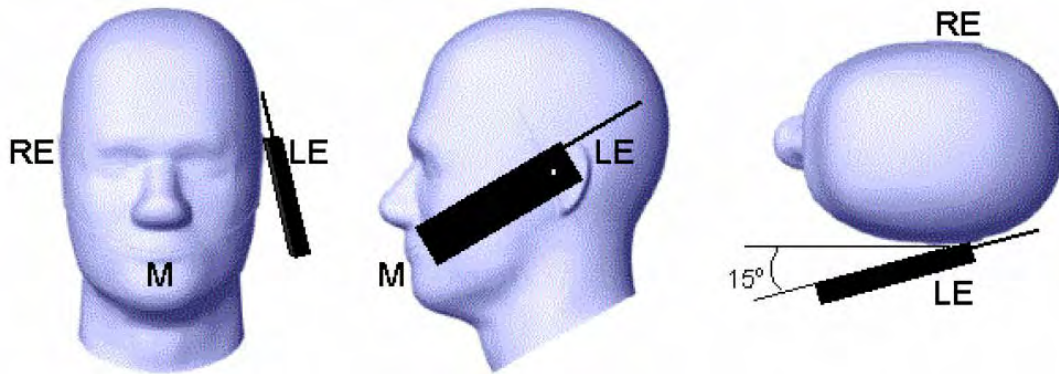

Picture 8.3 Tilt position of the wireless device on the left side of SAM

## 8.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

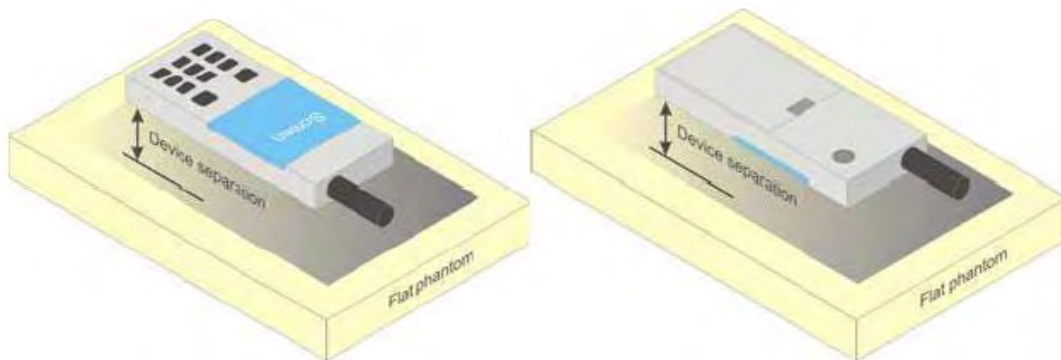


Picture 8.4 Test positions for body-worn devices

## 8.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

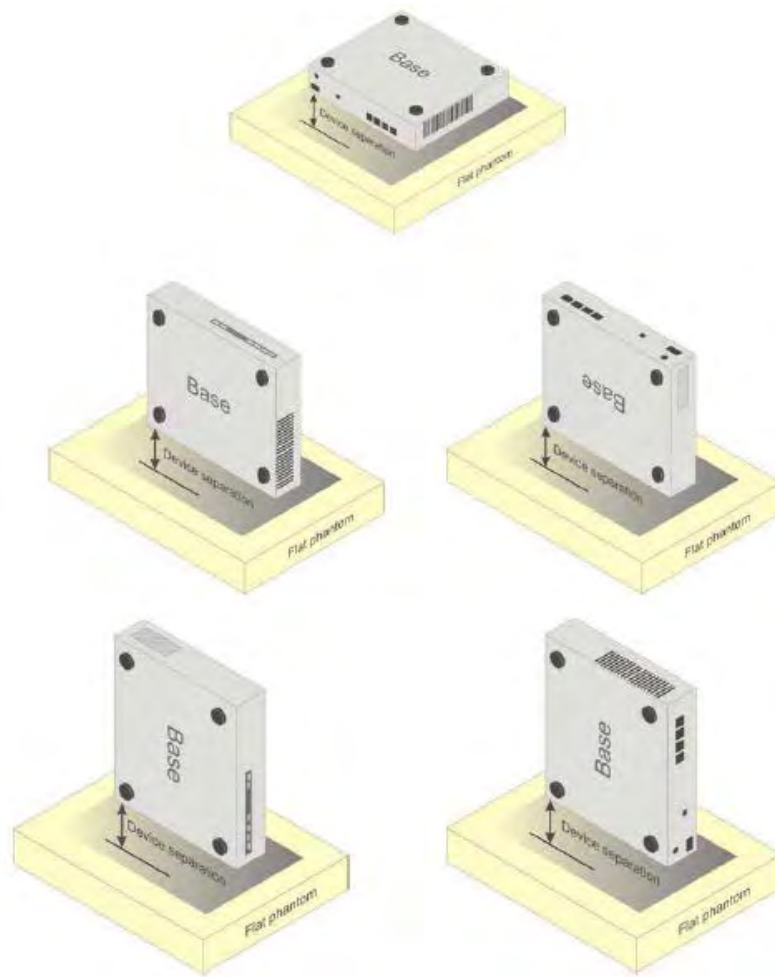

Picture 8.5 Test positions for desktop devices

**8.4 DUT Setup Photos****Picture 8.6**

## 9 Tissue Simulating Liquids

### 9.1 Equivalent Tissues

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 9.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

**Table 9.1: Composition of the Tissue Equivalent Matter**

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body
Ingredients (% by weight)						
Water	41.45	52.5	55.242	69.91	58.79	72.60
Sugar	56.0	45.0	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18
Preventol	0.1	0.1	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$


**Table 9.2: Targets for tissue simulating liquid**

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3

### 9.2 Dielectric Performance

**Table 9.3: Dielectric Performance of Tissue Simulating Liquid**

Measurement Date : 835 MHz <b>December 13, 2012</b> 1900 MHz <b>December 14, 2012</b> 2450 MHz <b>December 12, 2012</b>				
/	Type	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
<b>Measurement value</b>	Head	835 MHz	40.88	0.891
	Body	835 MHz	54.25	0.989
	Head	1900 MHz	40.93	1.385
	Body	1900 MHz	52.24	1.503
	Head	2450 MHz	39.66	1.827
	Body	2450 MHz	51.96	1.968

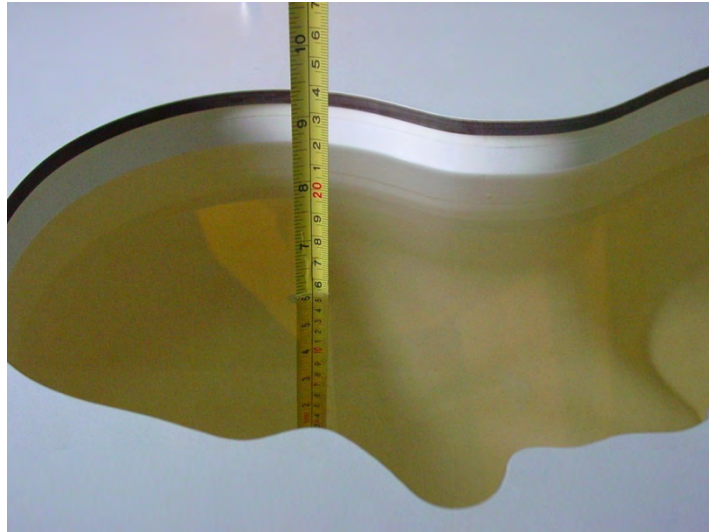

**Picture 9.1: Liquid depth in the Head Phantom (850 MHz)**



**Picture 9.2 Liquid depth in the Flat Phantom (1900MHz)**



**Picture 9.3 Liquid depth in the Flat Phantom (2450MHz)**




## 10 System Validation

### 10.1 System Validation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.


### 10.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

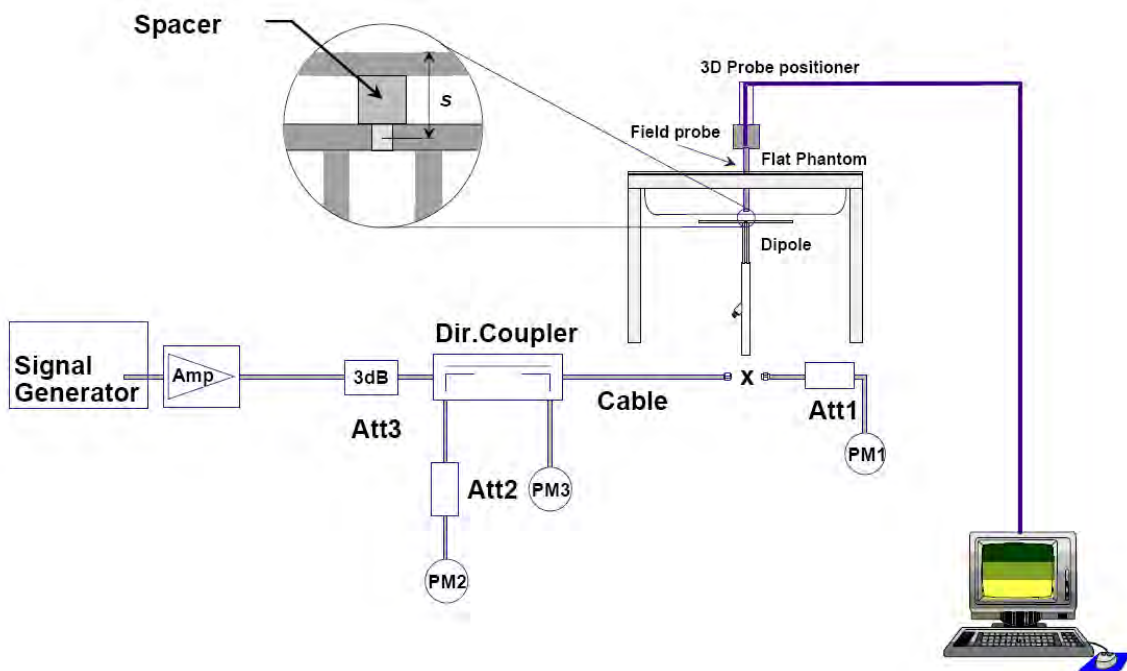

**Picture 10.1 System Setup for System Evaluation**

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

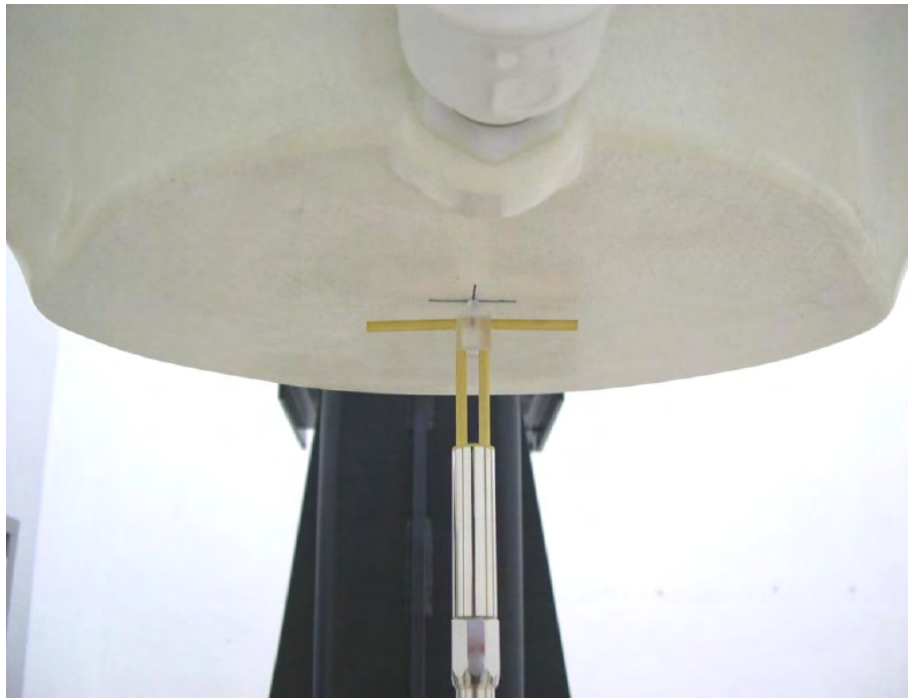

Picture 10.2 Photo of Dipole Setup

**Table 10.1: System Validation of Head**

Measurement Date : 835 MHz <u>December 13, 2012</u> 1900 MHz <u>December 14, 2012</u> 2450 MHz <u>December 12, 2012</u>							
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	6.07	9.30	6.20	9.48	2.14%	1.94%
	1900 MHz	20.6	39.1	20.08	38.28	-2.52%	-2.10%
2450 MHz	24.4	52.4	23.76	51.20	-2.62%	-2.29%	

**Table 10.2: System Validation of Body**

Measurement Date : 835 MHz <u>December 13, 2012</u> 1900 MHz <u>December 14, 2012</u> 2450 MHz <u>December 12, 2012</u>							
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	6.20	9.36	6.32	9.56	1.94%	2.14%
	1900 MHz	21.3	39.9	21.84	40.80	2.54%	2.26%
2450 MHz	23.6	50.4	23.32	50.80	-1.19%	0.79%	



## 11 Measurement Procedures

### 11.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


**Step 1:** The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

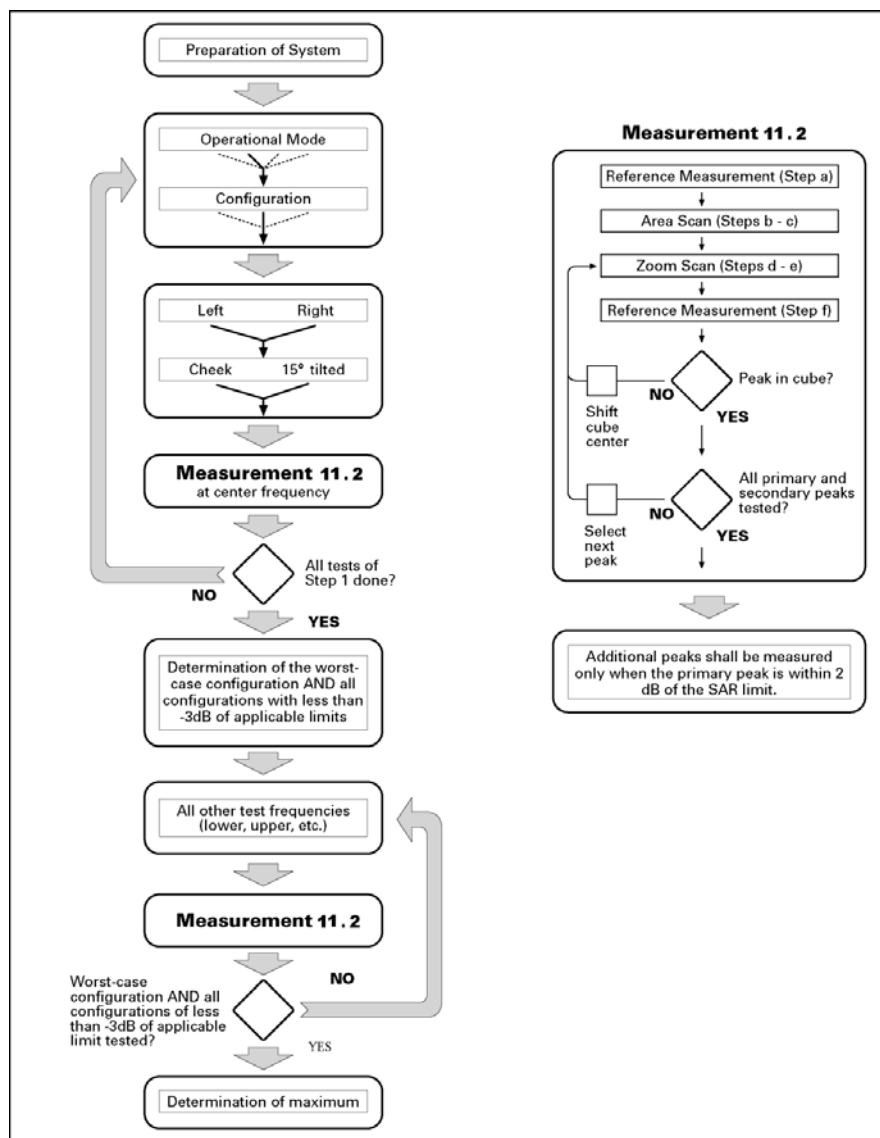

Picture 11.1 Block diagram of the tests to be performed

## 11.2 Measurement procedure

The following procedure shall be performed for each of the test conditions (see Picture 11.1) described in 11.1:

- a) Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- b) Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grip spacing of 20 mm for frequencies below 3 GHz and  $(60/f \text{ [GHz]})$  mm for frequencies of 3GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the

plane wave skin depth and  $\ln(x)$  is the natural logarithm. The maximum variation of the sensor-phantom surface shall be  $\pm 1$  mm for frequencies below 3 GHz and  $\pm 0.5$  mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than  $5^\circ$ . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be  $(24/f[\text{GHz}])$  mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be  $(8-f[\text{GHz}])$  mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be  $(12 / f[\text{GHz}])$  mm or less but not more than 4 mm, and the spacing between further points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than  $5^\circ$ . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing (e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

### 11.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output

conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

**For Release 5 HSDPA Data Devices:**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

**For Release 6 HSDPA Data Devices**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

### 11.4 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

### 11.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.1 to Table 14.12 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 12 Conducted Output Power

### 12.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 12.1: The conducted power measurement results for GSM850/1900**

GSM 850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.36	32.36	32.36
GSM 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1800MHz)	Channel 512(1850.2MHz)
	29.37	29.36	29.32

**Table 12.2: The conducted power measurement results for GPRS**

GSM 850 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.42	32.36	32.35	-9.03dB	23.39	23.33	23.32
2 Txslots	30.07	30.00	29.97	-6.02dB	24.05	23.98	23.95
3Txslots	28.21	28.12	28.09	-4.26dB	23.95	23.86	23.83
<b>4 Txslots</b>	27.12	27.05	27.02	-3.01dB	<b>24.11</b>	<b>24.04</b>	<b>24.01</b>
GSM 850 EGPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.43	32.35	32.37	-9.03dB	23.40	23.32	23.34
2 Txslots	30.08	29.98	29.99	-6.02dB	24.06	23.96	23.97
3Txslots	28.22	28.11	28.11	-4.26dB	23.96	23.85	23.85
<b>4 Txslots</b>	27.14	27.04	27.03	-3.01dB	<b>24.13</b>	<b>24.03</b>	<b>24.02</b>
PCS1900 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.34	29.34	29.30	-9.03dB	20.31	20.31	20.27
<b>2 Txslots</b>	29.00	28.99	28.97	-6.02dB	<b>22.98</b>	<b>22.97</b>	<b>22.95</b>
3Txslots	26.31	26.30	26.29	-4.26dB	22.05	22.04	22.03
4 Txslots	25.33	25.30	25.47	-3.01dB	22.32	22.29	22.46
PCS1900 EGPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.32	29.32	29.28	-9.03dB	20.29	20.29	20.25
<b>2 Txslots</b>	28.98	28.98	28.95	-6.02dB	<b>22.96</b>	<b>22.96</b>	<b>22.93</b>
3Txslots	26.29	26.28	26.27	-4.26dB	22.03	22.02	22.01
4 Txslots	25.31	25.30	25.41	-3.01dB	22.30	22.29	22.40

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB  
 3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB  
 4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and 2Txslots for GSM1900.**

## 12.2 WCDMA Measurement result

**Table 10: The conducted Power for WCDMA850/1900**

Item	band	FDDV result		
	ARFCN	4132 (826.4MHz)	4182 (836.4MHz)	4233 (846.6MHz)
WCDMA	\	22.71	22.73	22.55
HSUPA	1	19.87	19.95	19.66
	2	18.86	18.95	18.66
	3	19.35	19.44	19.15
	4	19.87	19.96	19.70
	5	21.84	21.91	21.64
Item	band	FDDII result		
	ARFCN	9262 (1852.4MHz)	9400 (1880MHz)	9538 (1907.6MHz)
WCDMA	\	23.11	23.07	23.01
HSUPA	1	20.03	20.15	20.09
	2	19.04	19.16	19.11
	3	19.53	19.63	19.58
	4	20.05	20.17	20.12
	5	22.04	22.15	22.09

**Note:** HSUPA body SAR are not required, because maximum average output power of each RF channel with HSDPA active is not 1/4 dB higher than that measured without HSUPA and the maximum SAR for WCDMA850 and WCDMA1900 are not above 75% of the SAR limit.

## 12.3 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	5.12	2.31	4.32

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	16.31	16.27	16.34	16.06
6	16.72	16.68	16.80	16.56
11	16.95	16.90	17.04	16.78

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	14.21	14.11	14.04	13.84	13.66	13.51	13.03	12.91
6	14.69	14.62	14.52	14.14	13.96	13.71	13.45	13.33
11	14.96	14.91	14.79	14.61	14.24	13.94	13.67	13.56

20M 802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	10.84	10.66	10.48	10.34	10.09	9.86	9.72	9.62
6	11.39	11.23	11.09	10.96	10.48	10.27	10.17	10.08
11	11.68	11.52	11.36	11.23	11.95	10.74	10.62	10.51

40M 802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	9.58	9.29	9.03	8.59	8.23	7.81	7.69	7.56
6	9.81	9.52	9.26	8.78	8.39	8.09	7.96	7.81
9	10.21	9.73	9.48	9.23	8.85	8.34	8.20	8.09

The peak conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	19.93	20.19	21.61	22.92
6	/	/	/	23.50
11	/	/	/	23.75

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	22.70	22.63	22.47	22.43	22.99	22.87	22.91	22.89
6	/	/	/	/	23.24	/	/	/
11	/	/	/	/	23.56	/	/	/

20M 802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	19.52	19.31	19.19	19.10	19.58	19.72	19.66	19.65
6	/	/	/	/	/	20.13	/	/
11	/	/	/	/	/	20.60	/	/

40M 802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	18.40	18.21	18.22	18.48	18.42	18.51	18.48	18.43
6	/	/	/	/	/	18.61	/	/
9	/	/	/	/	/	19.00	/	/

SAR is not required for 802.11g/n channels if the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for "802.11b, 1Mbps, channel 11".




## 13 Simultaneous TX SAR Considerations

### 13.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 13.2 Transmit Antenna Separation Distances

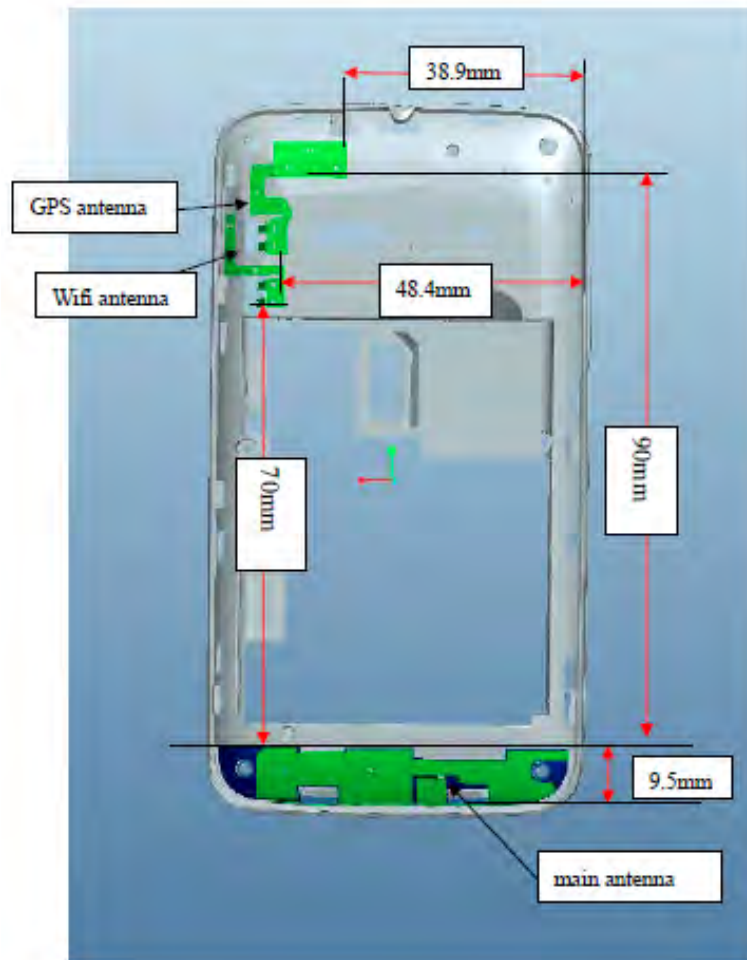

Picture 13.1 Antenna Locations

### 13.3 Simultaneous Transmission for EUT

Table 13.1: Summary of Transmitters

Band/Mode	F(GHz)	$2P_{Ref}$ power threshold (mW)	RF output power (mW)
Bluetooth	2.441	24.6	3.25
2.4GHz WLAN 802.11 b/g	2.45	24.5	49.55
Band/Mode	F(GHz)	$P_{Ref}$ power threshold (mW)	RF output power (mW)
Bluetooth	2.441	12.29	3.25



For the WiFi antenna and RF antenna, because the output of WiFi transmitter is  $> 2P_{Ref}$  and its antenna is  $> 5.0$  cm from RF antenna, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for WiFi is considered with measurement results of GSM/WCDMA and WiFi.

For the BT antenna and RF antenna, because the output of BT transmitter is  $< 2P_{Ref}$  and its antenna is  $> 5.0$  cm from RF antenna, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR for Bluetooth should not be performed.

For the BT antenna and WiFi antenna, because the output of BT transmitter is  $< P_{Ref}$ , its antenna is  $< 2.5$  cm from WiFi antenna and 1g SAR for WiFi antenna is  $< 1.2$ W/kg, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR for Bluetooth should not be performed.

**Table 13.2 SAR Evaluation Requirements for Multiple Transmitter Handsets**

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<b>SAR not required:</b> <u>Unlicensed only</u>
Unlicensed Transmitters	<p><u>When there is no simultaneous transmission –</u></p> <ul style="list-style-type: none"> <li>○ output <math>\leq 60</math>/f: SAR not required</li> <li>○ output <math>&gt; 60</math>/f: stand-alone SAR required</li> </ul> <p><u>When there is simultaneous transmission –</u> <u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> <li>○ output <math>\leq 2 \cdot P_{Ref}</math> and antenna is <math>\geq 5.0</math> cm from other antennas</li> <li>○ output <math>\leq P_{Ref}</math> and antenna is <math>\geq 2.5</math> cm from other antennas</li> <li>○ output <math>\leq P_{Ref}</math> and antenna is <math>&lt; 2.5</math> cm from other antennas, each with either output power <math>\leq P_{Ref}</math> or 1-g SAR <math>&lt; 1.2</math> W/kg</li> </ul> <p><u>Otherwise stand-alone SAR is required</u></p> <p><u>When stand-alone SAR is required</u></p> <ul style="list-style-type: none"> <li>○ test SAR on highest output channel for each wireless mode and exposure condition</li> <li>○ if SAR for highest output channel is <math>&gt; 50\%</math> of SAR limit, evaluate all channels according to normal procedures</li> </ul>	<ul style="list-style-type: none"> <li>○ when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <p><u>Licensed &amp; Unlicensed</u></p> <ul style="list-style-type: none"> <li>○ when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <p><b>SAR required:</b> <u>Licensed &amp; Unlicensed</u> antenna pairs with SAR to peak location separation ratio <math>\geq 0.3</math>; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p><b>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</b></p>

**Table 13.3: The sum of SAR values**

	Position	GSM / WCDMA	WiFi	Sum
<b>Maximum SAR value for Head</b>	Left hand, Touch cheek	0.943	0.575	<b>1.518</b>
	Right hand, Touch cheek	1.18	0.288	<b>1.468</b>
<b>Maximum SAR value for Body</b>	Toward Ground	1.14	0.158	<b>1.298</b>
	Right Side	0.669	0.177	<b>0.846</b>

According to the above table, the sum of SAR values for GSM and WiFi  $< 1.6$ W/kg. So the simultaneous transmission SAR is not required for WiFi transmitter.

## 14 SAR Test Result

### 14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.1: The evaluation of multi-batteries for Head Test

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
848.8	251	GSM850	Left	Touch	CAB60B0000C1	0.808	-0.13
848.8	251	GSM850	Left	Touch	CAB60B0000C2	0.746	-0.07

Note: According to the values in the above table, the battery, CAB60B0000C1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.2: The evaluation of multi-batteries for Body Test

Frequency		Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	661	\	Ground	10	CAB60B0000C1	0.918	0.11
1880	661	\	Ground	10	CAB60B0000C2	0.910	-0.16

Note: According to the values in the above table, the battery, CAB60B0000C1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

### 14.1 SAR Test Result

Table 14.3: SAR Values (GSM 850 MHz Band - Head)

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
848.8	251	GSM850	Left	Touch	CAB60B0000C1	0.808	-0.13
836.6	190	GSM850	Left	Touch	CAB60B0000C1	0.590	-0.00
824.2	128	GSM850	Left	Touch	CAB60B0000C1	0.428	-0.16
848.8	251	GSM850	Left	Tilt	CAB60B0000C1	0.365	-0.04
836.6	190	GSM850	Left	Tilt	CAB60B0000C1	0.280	0.04
824.2	128	GSM850	Left	Tilt	CAB60B0000C1	0.237	0.05
848.8	251	GSM850	Right	Touch	CAB60B0000C1	0.609	-0.15
836.6	190	GSM850	Right	Touch	CAB60B0000C1	0.450	0.01
824.2	128	GSM850	Right	Touch	CAB60B0000C1	0.334	0.12
848.8	251	GSM850	Right	Tilt	CAB60B0000C1	0.381	0.07
836.6	190	GSM850	Right	Tilt	CAB60B0000C1	0.307	-0.04
824.2	128	GSM850	Right	Tilt	CAB60B0000C1	0.242	0.05

Table 14.4: SAR Values (GSM 850 MHz Band - Body)

Frequency		Mode/Band	Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.						(W/kg)	
848.8	251	GPRS	\	Phantom	10	CAB60B0000C1	0.768	-0.01
848.8	251	GPRS	\	Ground	10	CAB60B0000C1	1.05	0.02
836.6	190	GPRS	\	Ground	10	CAB60B0000C1	0.920	-0.02
824.2	128	GPRS	\	Ground	10	CAB60B0000C1	0.697	0.03
848.8	251	GPRS	\	Left	10	CAB60B0000C1	0.722	-0.11
848.8	251	GPRS	\	Right	10	CAB60B0000C1	0.666	0.05
848.8	251	GPRS	\	Bottom	10	CAB60B0000C1	0.172	-0.06
848.8	251	EGPRS	\	Ground	10	CAB60B0000C1	1.02	-0.12
848.8	251	Speech	CCB3160A11C1	Ground	10	CAB60B0000C1	0.781	-0.14
848.8	251	Speech	CCB3160A11C2	Ground	10	CAB60B0000C1	0.792	0.14

Table 14.5: SAR Values (GSM 1900 MHz Band - Head)

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1909.8	810	GSM1900	Left	Touch	CAB60B0000C1	0.393	-0.13
1880	661	GSM1900	Left	Touch	CAB60B0000C1	0.390	0.04
1850.2	512	GSM1900	Left	Touch	CAB60B0000C1	0.370	-0.09
1909.8	810	GSM1900	Left	Tilt	CAB60B0000C1	0.174	-0.09
1880	661	GSM1900	Left	Tilt	CAB60B0000C1	0.168	-0.08
1850.2	512	GSM1900	Left	Tilt	CAB60B0000C1	0.153	-0.05
1909.8	810	GSM1900	Right	Touch	CAB60B0000C1	0.579	0.01
1880	661	GSM1900	Right	Touch	CAB60B0000C1	0.555	-0.17
1850.2	512	GSM1900	Right	Touch	CAB60B0000C1	0.484	-0.00
1909.8	810	GSM1900	Right	Tilt	CAB60B0000C1	0.184	0.03
1880	661	GSM1900	Right	Tilt	CAB60B0000C1	0.167	-0.05
1850.2	512	GSM1900	Right	Tilt	CAB60B0000C1	0.143	-0.07

Table 14.6: SAR Values (GSM 1900 MHz Band - Body)

Frequency		Mode/Band	Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.						(W/kg)	
1909.8	810	GPRS	\	Phantom	10	CAB60B0000C1	0.762	-0.15
1909.8	810	GPRS	\	Ground	10	CAB60B0000C1	0.890	-0.18
1880	661	GPRS	\	Ground	10	CAB60B0000C1	0.919	-0.06
1850.2	512	GPRS	\	Ground	10	CAB60B0000C1	0.898	0.15
1909.8	810	GPRS	\	Left	10	CAB60B0000C1	0.201	-0.05
1909.8	810	GPRS	\	Right	10	CAB60B0000C1	0.288	-0.03
1909.8	810	GPRS	\	Bottom	10	CAB60B0000C1	0.605	0.11
1880	661	EGPRS	\	Ground	10	CAB60B0000C1	0.918	0.11
1880	661	Speech	CCB3160A11C1	Ground	10	CAB60B0000C1	0.542	-0.00
1880	661	Speech	CCB3160A11C2	Ground	10	CAB60B0000C1	0.503	0.02

Table 14.7: SAR Values (WCDMA 850 MHz Band - Head)

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
846.6	4233	WCDMA850	Left	Touch	CAB60B0000C1	0.690	-0.18
836.4	4182	WCDMA850	Left	Touch	CAB60B0000C1	0.575	-0.01
826.4	4132	WCDMA850	Left	Touch	CAB60B0000C1	0.515	0.01
846.6	4233	WCDMA850	Left	Tilt	CAB60B0000C1	0.352	-0.00
836.4	4182	WCDMA850	Left	Tilt	CAB60B0000C1	0.297	-0.19
826.4	4132	WCDMA850	Left	Tilt	CAB60B0000C1	0.275	0.07
846.6	4233	WCDMA850	Right	Touch	CAB60B0000C1	0.507	-0.18
836.4	4182	WCDMA850	Right	Touch	CAB60B0000C1	0.431	0.12
826.4	4132	WCDMA850	Right	Touch	CAB60B0000C1	0.394	0.05
846.6	4233	WCDMA850	Right	Tilt	CAB60B0000C1	0.327	-0.08
836.4	4182	WCDMA850	Right	Tilt	CAB60B0000C1	0.291	0.02
826.4	4132	WCDMA850	Right	Tilt	CAB60B0000C1	0.286	0.02

Table 14.8: SAR Values (WCDMA 850 MHz Band - Body)

Frequency		Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
836.4	4182	\	Phantom	10	CAB60B0000C1	0.694	-0.03
846.6	4233	\	Ground	10	CAB60B0000C1	0.977	-0.01
836.4	4182	\	Ground	10	CAB60B0000C1	1.01	-0.03
826.4	4132	\	Ground	10	CAB60B0000C1	0.990	-0.01
836.4	4182	\	Left	10	CAB60B0000C1	0.765	-0.01
836.4	4182	\	Right	10	CAB60B0000C1	0.669	0.01
836.4	4182	\	Bottom	10	CAB60B0000C1	0.163	-0.04
846.6	4233	CCB3160A11C1	Ground	10	CAB60B0000C1	0.774	-0.07
836.4	4182	CCB3160A11C1	Ground	10	CAB60B0000C1	0.849	-0.03
826.4	4132	CCB3160A11C1	Ground	10	CAB60B0000C1	0.803	0.02
846.6	4233	CCB3160A11C2	Ground	10	CAB60B0000C1	0.818	0.03
836.4	4182	CCB3160A11C2	Ground	10	CAB60B0000C1	0.921	0.02
826.4	4132	CCB3160A11C2	Ground	10	CAB60B0000C1	0.857	0.00

Table 14.9: SAR Values (WCDMA 1900 MHz Band - Head)

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1907.6	9538	WCDMA1900	Left	Touch	CAB60B0000C1	0.943	0.18
1880	9400	WCDMA1900	Left	Touch	CAB60B0000C1	0.775	0.06
1852.4	9262	WCDMA1900	Left	Touch	CAB60B0000C1	0.823	0.09
1907.6	9538	WCDMA1900	Left	Tilt	CAB60B0000C1	0.400	-0.16
1880	9400	WCDMA1900	Left	Tilt	CAB60B0000C1	0.324	-0.12
1852.4	9262	WCDMA1900	Left	Tilt	CAB60B0000C1	0.314	0.10
1907.6	9538	WCDMA1900	Right	Touch	CAB60B0000C1	1.18	0.13

1880	9400	WCDMA1900	Right	Touch	CAB60B0000C1	0.868	-0.03
1852.4	9262	WCDMA1900	Right	Touch	CAB60B0000C1	0.829	-0.10
1907.6	9538	WCDMA1900	Right	Tilt	CAB60B0000C1	0.384	-0.00
1880	9400	WCDMA1900	Right	Tilt	CAB60B0000C1	0.313	0.15
1852.4	9262	WCDMA1900	Right	Tilt	CAB60B0000C1	0.345	-0.05
1907.6	9538	WCDMA1900	Right	Touch	CAB60B0000C2	1.06	0.12

Table 14.10: SAR Values (WCDMA 1900 MHz Band - Body)

Frequency		Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1852.4	9262	\	Phantom	10	CAB60B0000C1	0.739	-0.04
1907.6	9538	\	Ground	10	CAB60B0000C1	1.14	-0.02
1880	9400	\	Ground	10	CAB60B0000C1	1.06	0.16
1852.4	9262	\	Ground	10	CAB60B0000C1	1.09	0.03
1852.4	9262	\	Left	10	CAB60B0000C1	0.213	0.09
1852.4	9262	\	Right	10	CAB60B0000C1	0.259	0.13
1907.6	9538	\	Bottom	10	CAB60B0000C1	0.933	0.07
1880	9400	\	Bottom	10	CAB60B0000C1	0.866	0.07
1852.4	9262	\	Bottom	10	CAB60B0000C1	0.919	0.09
1907.6	9538	CCB3160A11C1	Ground	10	CAB60B0000C1	1.1	0.10
1880	9400	CCB3160A11C1	Ground	10	CAB60B0000C1	0.958	0.05
1852.4	9262	CCB3160A11C1	Ground	10	CAB60B0000C1	1.05	0.04
1907.6	9538	CCB3160A11C2	Ground	10	CAB60B0000C1	1.12	0.03
1880	9400	CCB3160A11C2	Ground	10	CAB60B0000C1	0.971	0.05
1852.4	9262	CCB3160A11C2	Ground	10	CAB60B0000C1	1.06	0.16
1907.6	9538	\	Ground	10	CAB60B0000C2	1.13	0.01

Table 14.11: SAR Values (Wi-Fi 802.11b - Head)

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
2462	11	802.11 b	Left	Touch	CAB60B0000C1	0.575	-0.14
2462	11	802.11 b	Left	Tilt	CAB60B0000C1	0.184	-0.04
2462	11	802.11 b	Right	Touch	CAB60B0000C1	0.288	0.15
2462	11	802.11 b	Right	Tilt	CAB60B0000C1	0.228	0.11

Table 14.12: SAR Values (Wi-Fi 802.11b - Body)

Frequency		Mode/Band	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
2462	11	802.11 b	Phantom	10	CAB60B0000C1	0.148	-0.06
2462	11	802.11 b	Ground	10	CAB60B0000C1	0.158	-0.19
2462	11	802.11 b	Right	10	CAB60B0000C1	0.177	-0.04
2462	11	802.11 b	Top	10	CAB60B0000C1	0.066	-0.10

## 15 Measurement Uncertainty

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test sample related</b>										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					18.5	18.2	

## 16 MAIN TEST INSTRUMENTS

**Table 16.1: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	February 14, 2012	One year
02	Power meter	NRVD	102083	September 11, 2012	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49070393	November 13, 2012	One Year
05	Amplifier	VTL5400	0505	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2012	One year
07	E-field Probe	SPEAG ES3DV3	3149	April 24, 2012	One year
08	DAE	SPEAG DAE4	771	November 20, 2012	One year
09	Dipole Validation Kit	SPEAG D835V2	443	May 03, 2012	One year
10	Dipole Validation Kit	SPEAG D1900V2	541	May 09, 2012	One year
11	Dipole Validation Kit	SPEAG D2450V2	853	May 02, 2012	One year

\*\*\*END OF REPORT BODY\*\*\*



## ANNEX A GRAPH RESULTS

### 850 Left Cheek High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 40.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.242 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.995 mW/g

**SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.611 mW/g**

Maximum value of SAR (measured) = 0.837 mW/g


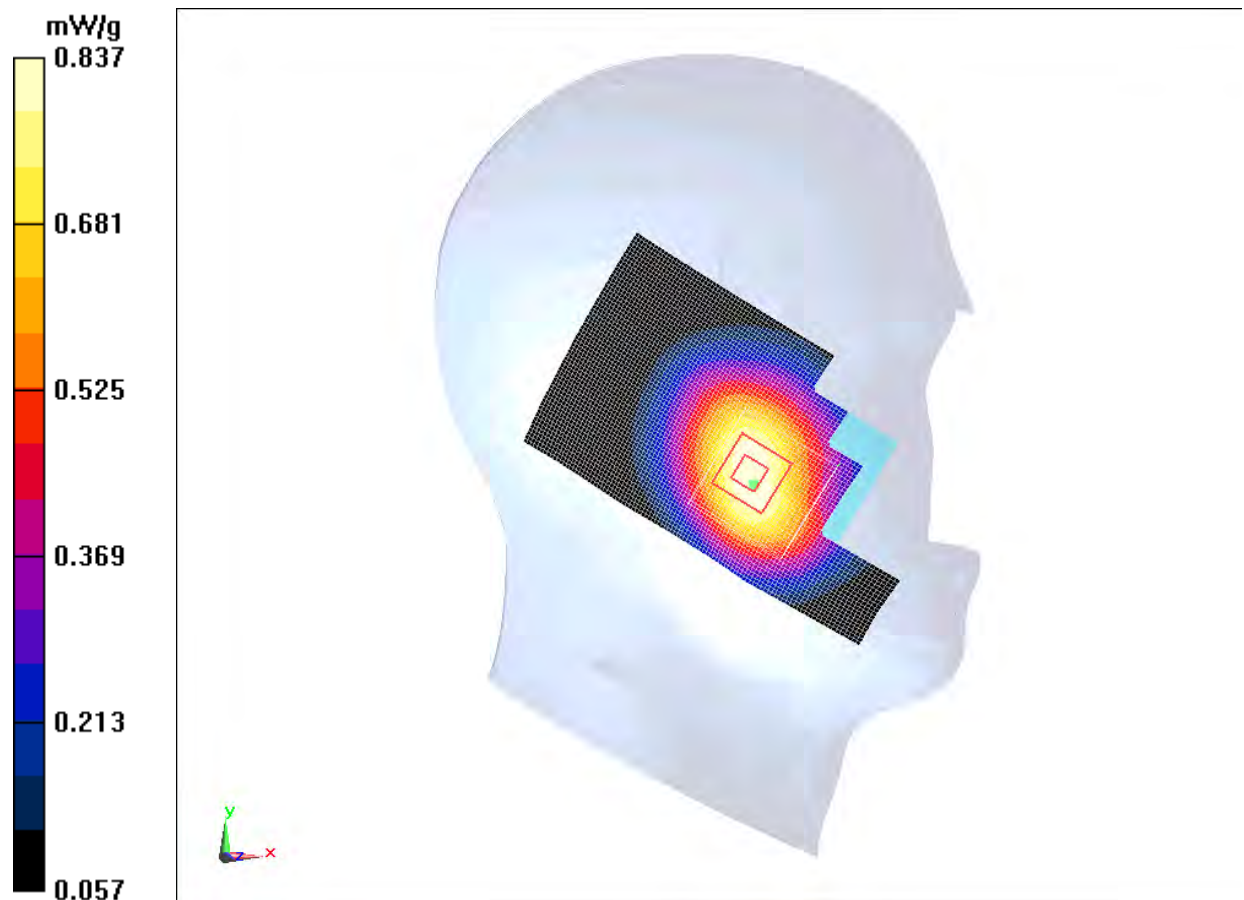


Fig. 1 850MHz CH251



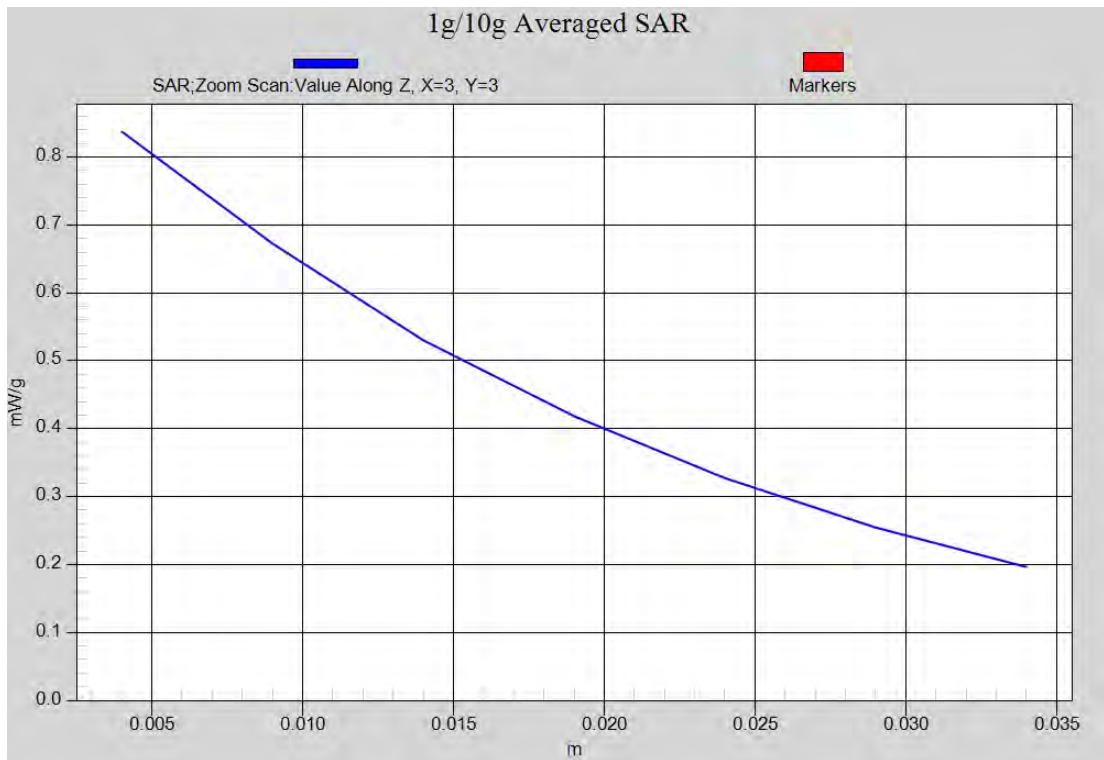

**Fig. 1-1 Z-Scan at power reference point (850 MHz CH251)**

**850 Left Cheek Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.621 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.108 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.744 mW/g

**SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.442 mW/g**

Maximum value of SAR (measured) = 0.614 mW/g

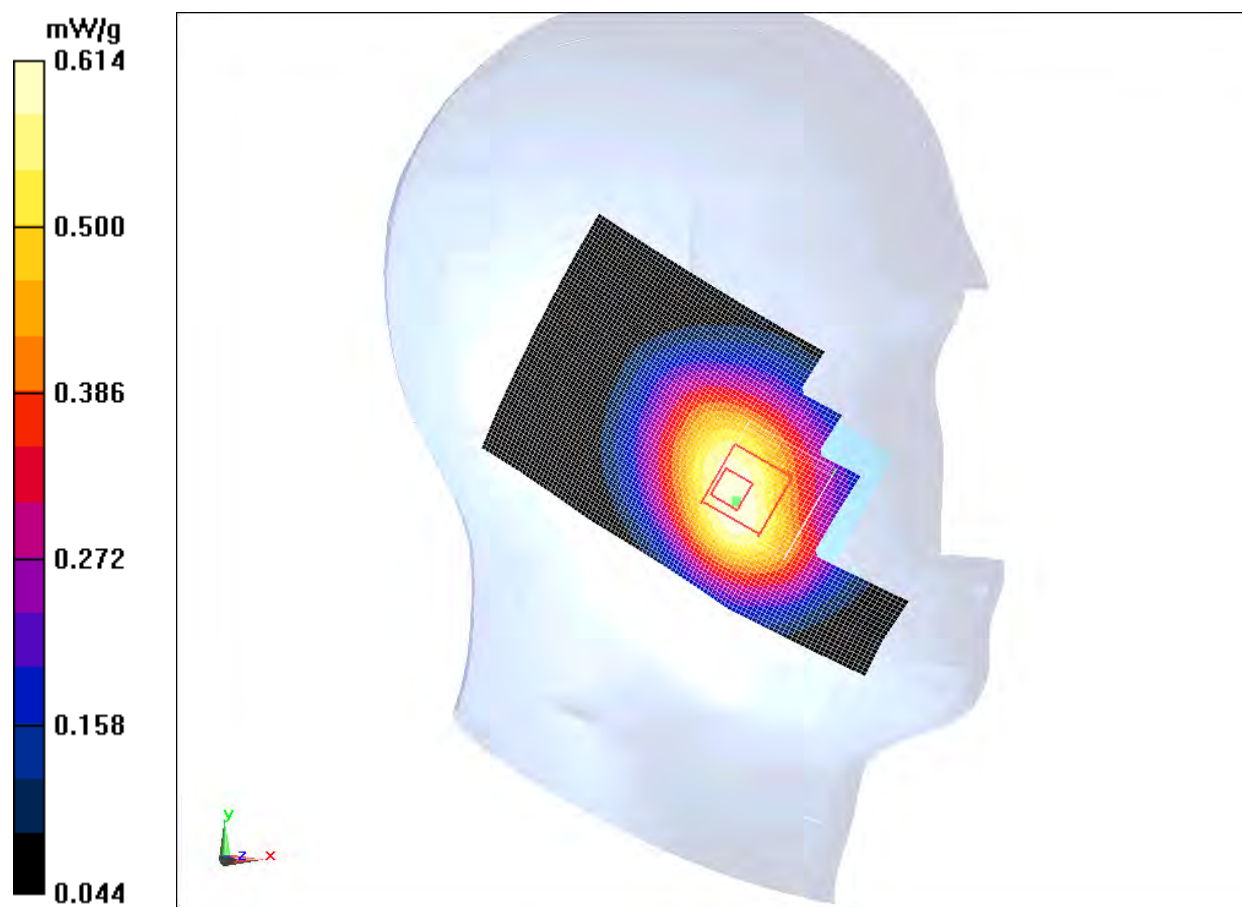

**Fig. 2 850 MHz CH190**

**850 Left Cheek Low**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.873 \text{ mho/m}$ ;  $\epsilon_r = 40.995$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$       Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: GSM; Frequency:  $824.2 \text{ MHz}$ ; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) =  $0.457 \text{ mW/g}$


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.467 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$

Peak SAR (extrapolated) =  $0.529 \text{ mW/g}$

**SAR(1 g) =  $0.428 \text{ mW/g}$ ; SAR(10 g) =  $0.325 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.445 \text{ mW/g}$

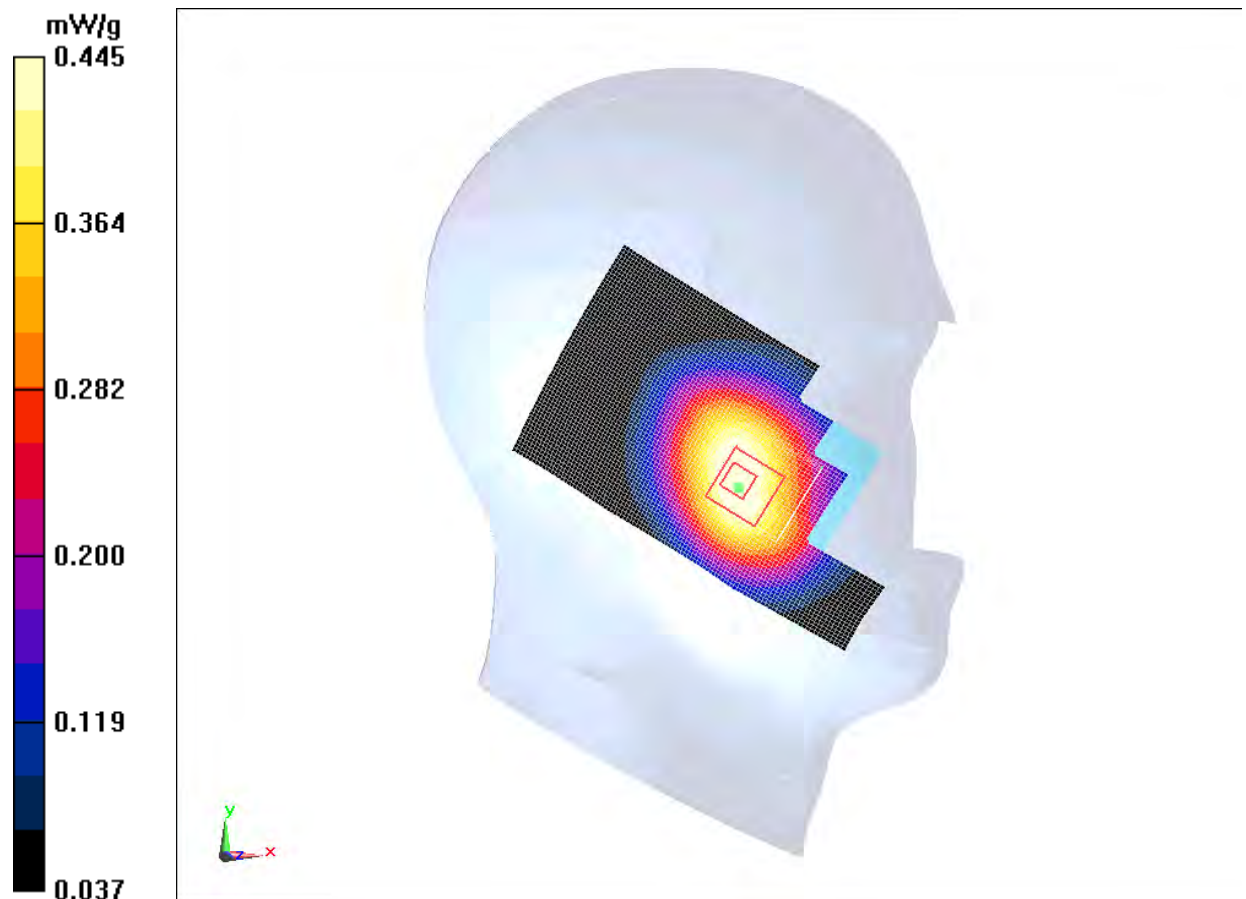

**Fig. 3 850 MHz CH128**

### 850 Left Tilt High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 40.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.384 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.071 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.456 mW/g

**SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.275 mW/g**

Maximum value of SAR (measured) = 0.384 mW/g

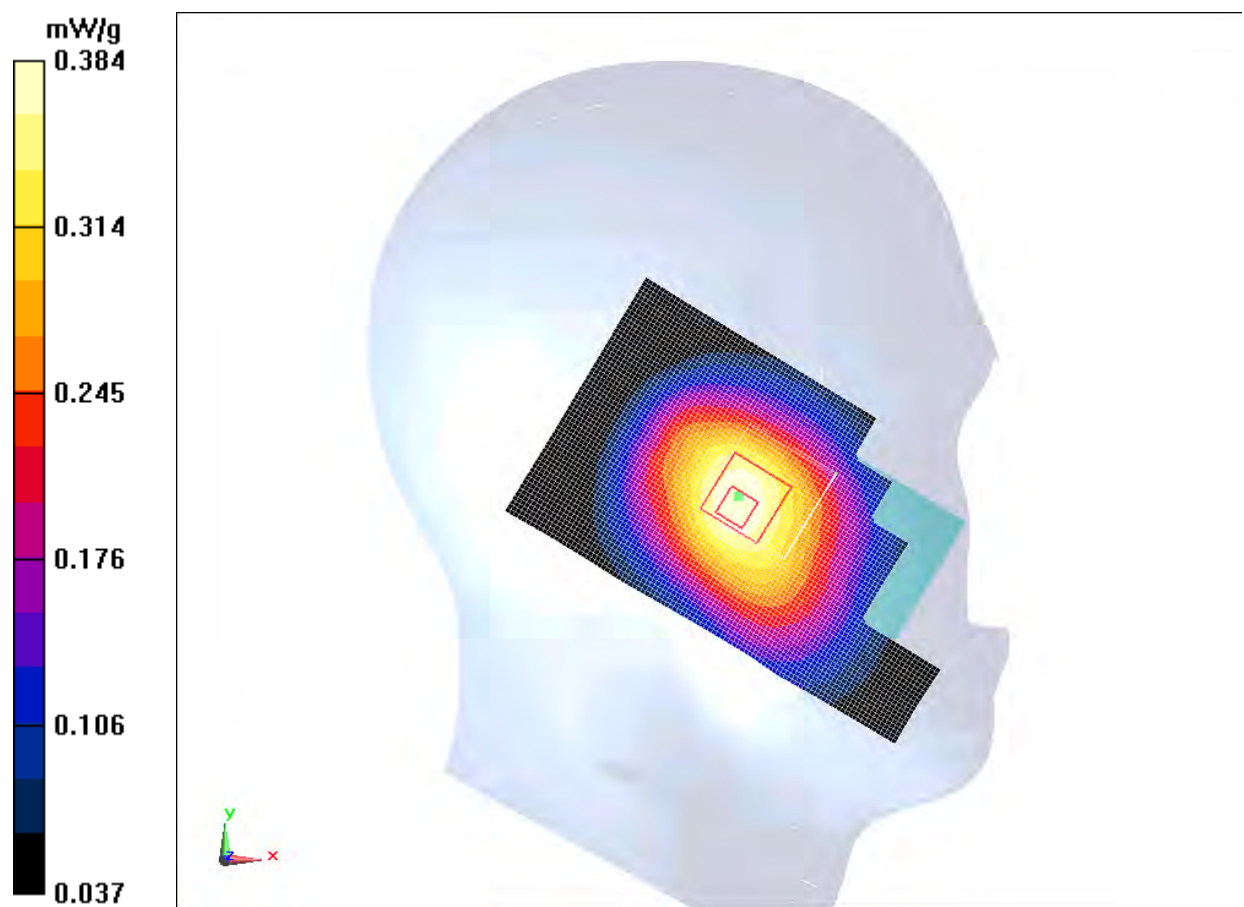


Fig.4 850 MHz CH251

### 850 Left Tilt Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.293 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.579 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.351 mW/g

**SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.210 mW/g**

Maximum value of SAR (measured) = 0.294 mW/g

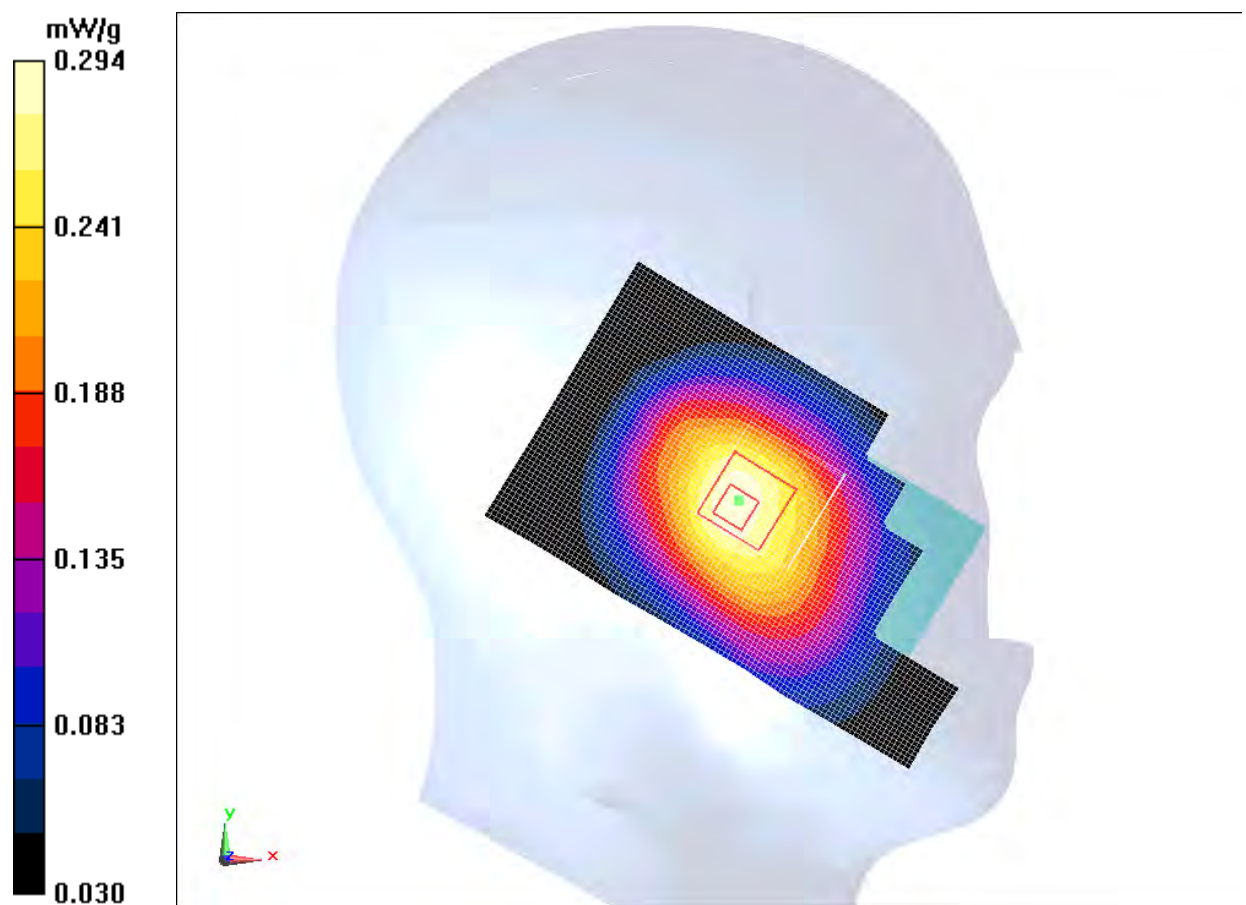


Fig.5 850 MHz CH190



**850 Left Tilt Low**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.873$  mho/m;  $\epsilon_r = 40.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.249 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.862 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.297 mW/g

**SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.179 mW/g**

Maximum value of SAR (measured) = 0.249 mW/g

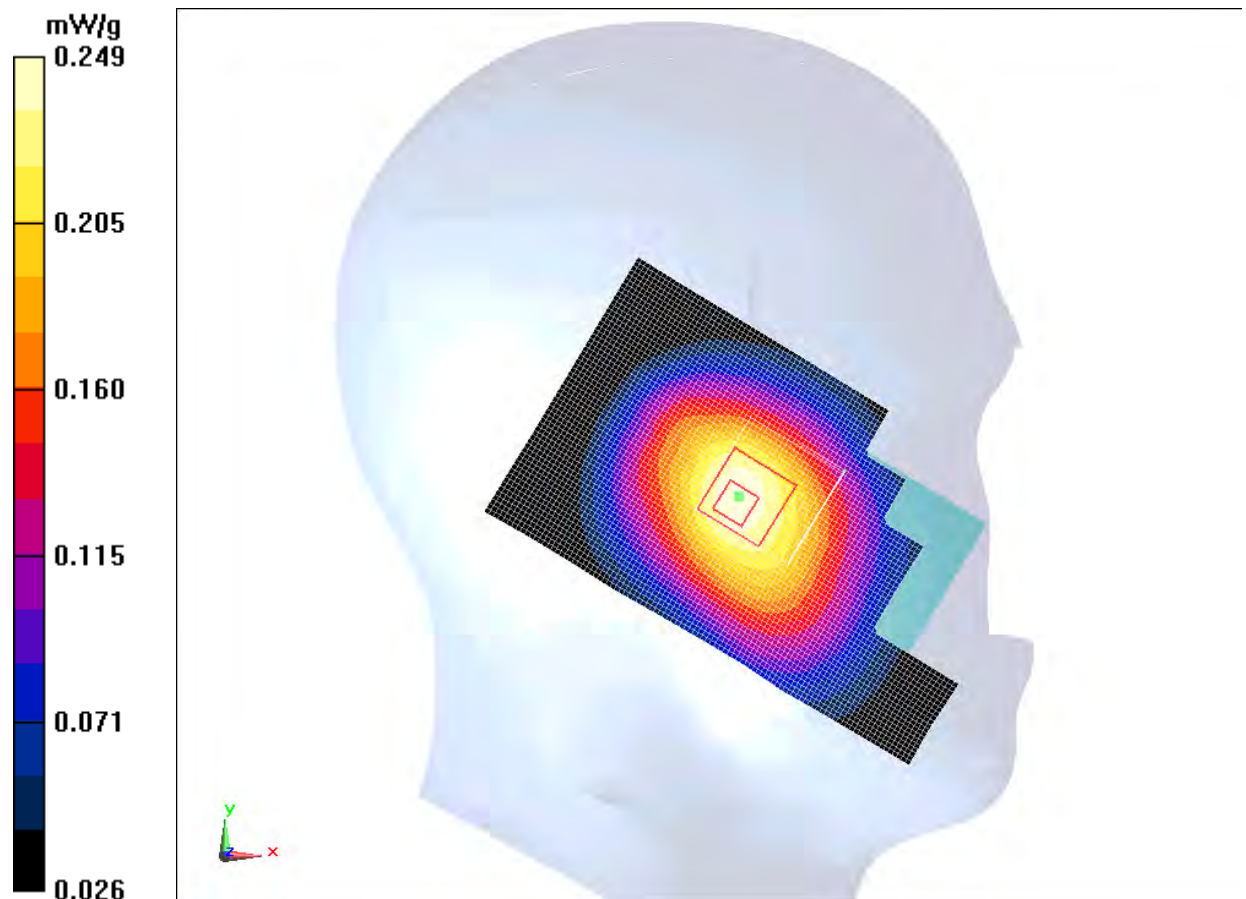

**Fig. 6 850 MHz CH128**

### 850 Right Cheek High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 40.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.639 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.337 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.756 mW/g

**SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.464 mW/g**

Maximum value of SAR (measured) = 0.634 mW/g

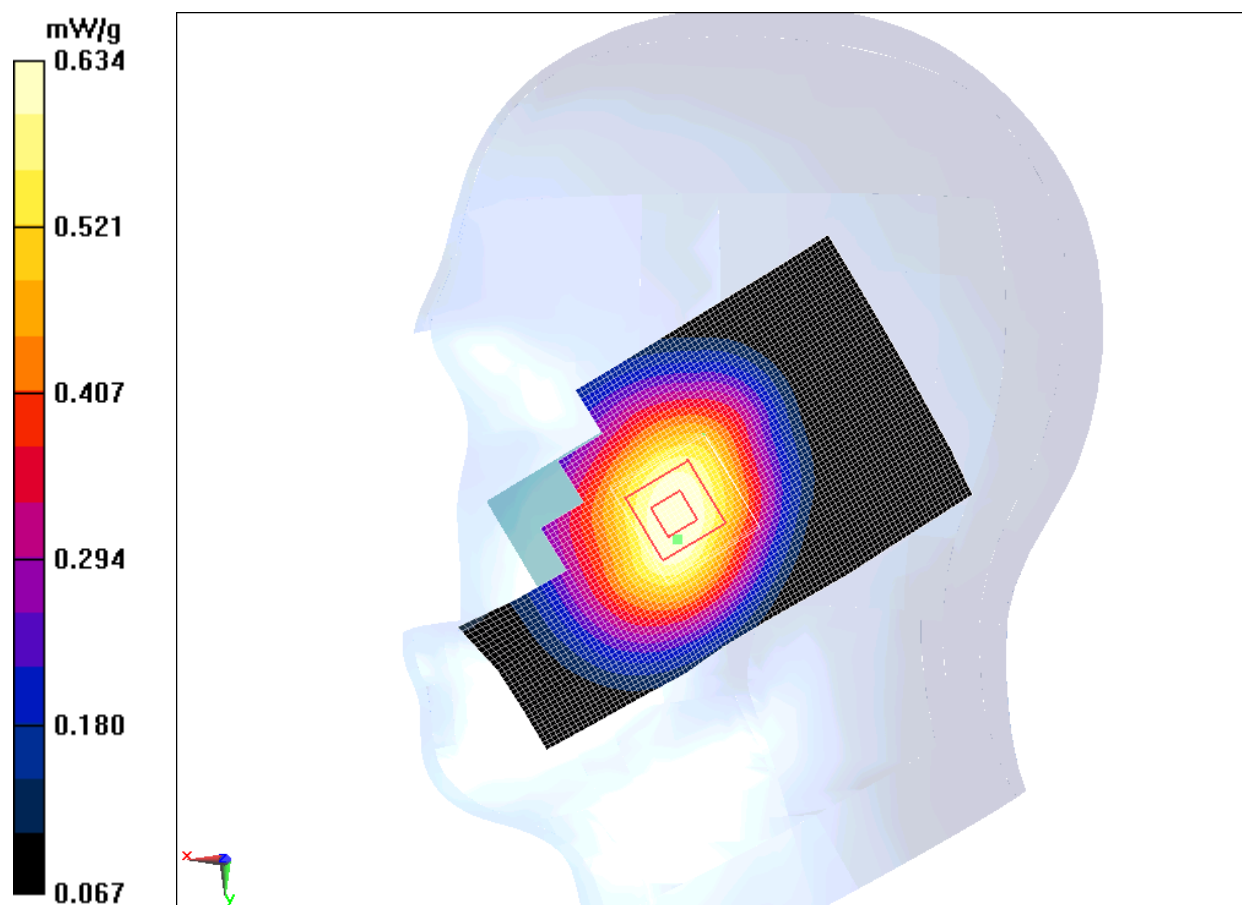


Fig. 7 850 MHz CH251

### 850 Right Cheek Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.458 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.048 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.551 mW/g

**SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.343 mW/g**

Maximum value of SAR (measured) = 0.469 mW/g

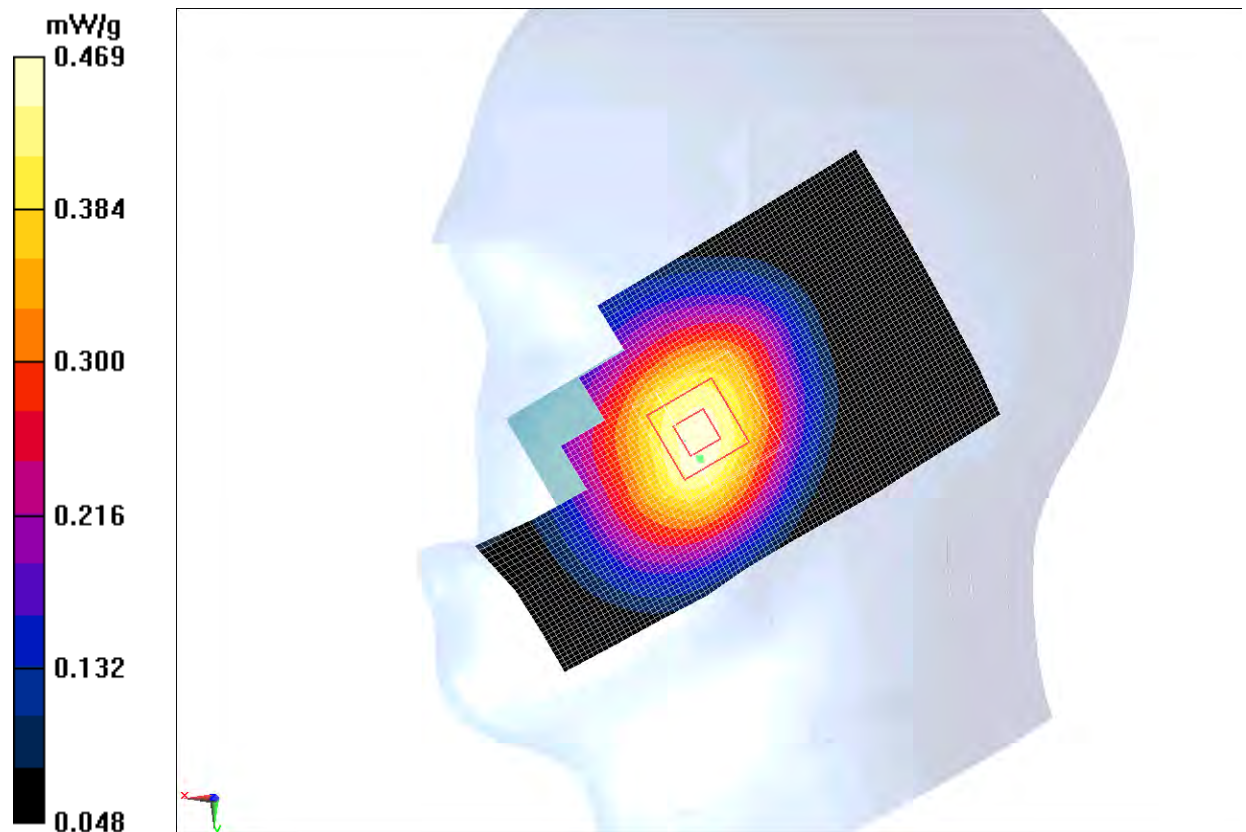


Fig. 8 850 MHz CH190



### 850 Right Cheek Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.873 \text{ mho/m}$ ;  $\epsilon_r = 40.995$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$       Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: GSM; Frequency:  $824.2 \text{ MHz}$ ; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) =  $0.356 \text{ mW/g}$

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.277 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$

Peak SAR (extrapolated) =  $0.415 \text{ mW/g}$

**SAR(1 g) =  $0.334 \text{ mW/g}$ ; SAR(10 g) =  $0.256 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.347 \text{ mW/g}$

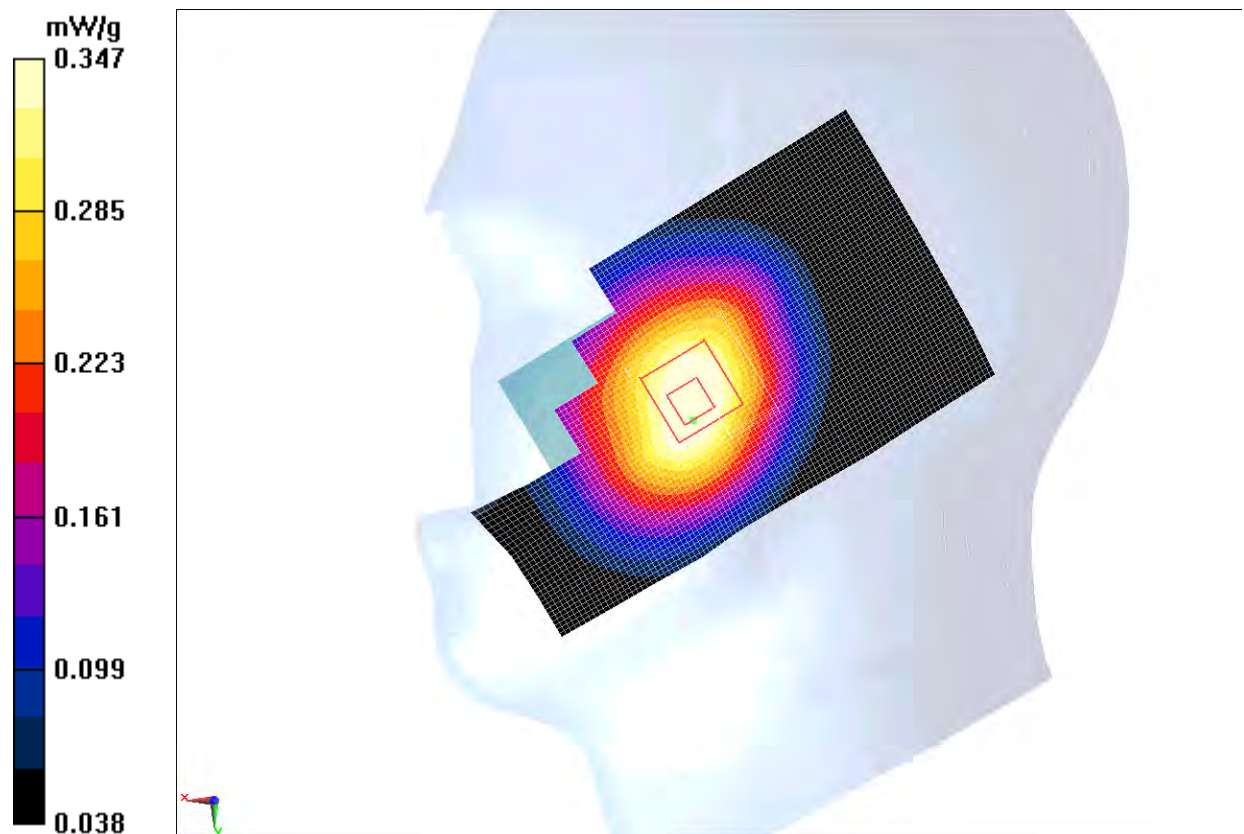


Fig. 9 850 MHz CH128

### 850 Right Tilt High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 40.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.396 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.794 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.474 mW/g

**SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.286 mW/g**

Maximum value of SAR (measured) = 0.397 mW/g

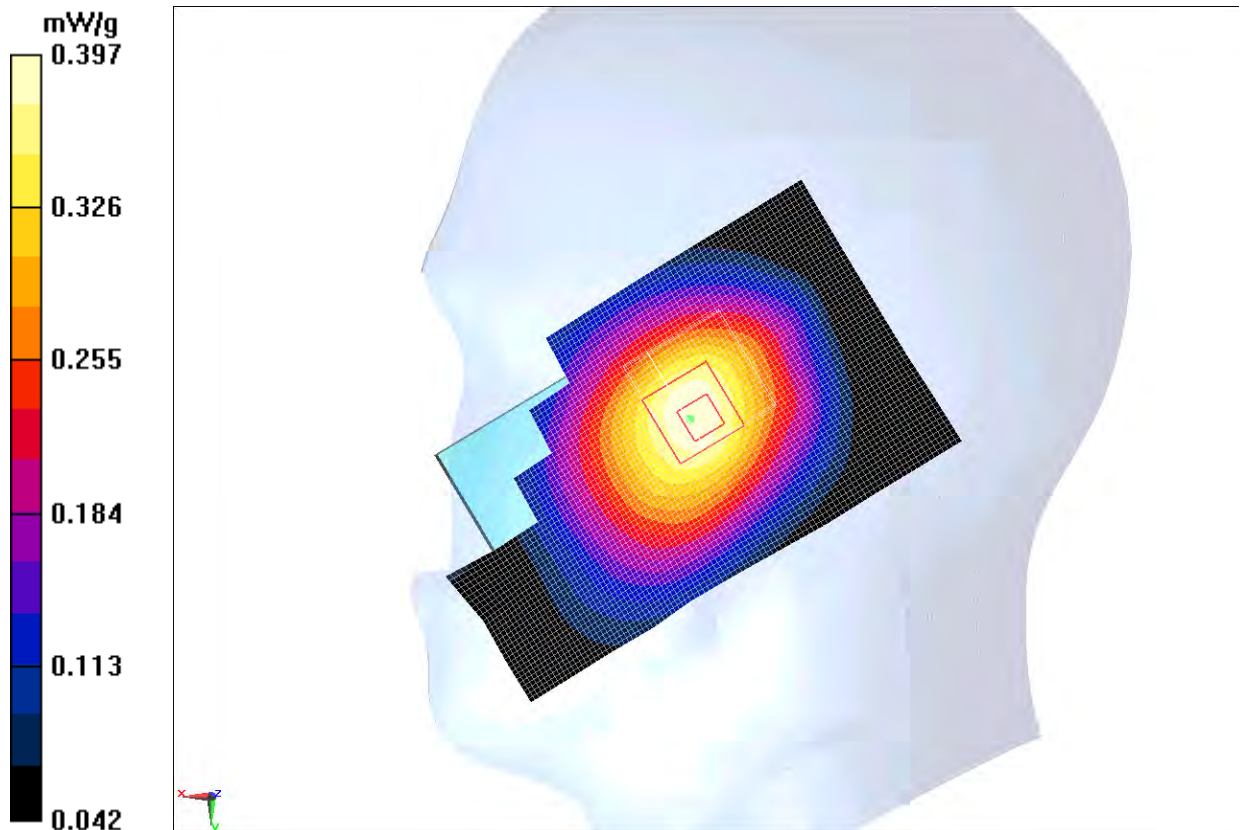


Fig.10 850 MHz CH251

**850 Right Tilt Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.325 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.577 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.380 mW/g

**SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.231 mW/g**

Maximum value of SAR (measured) = 0.321 mW/g

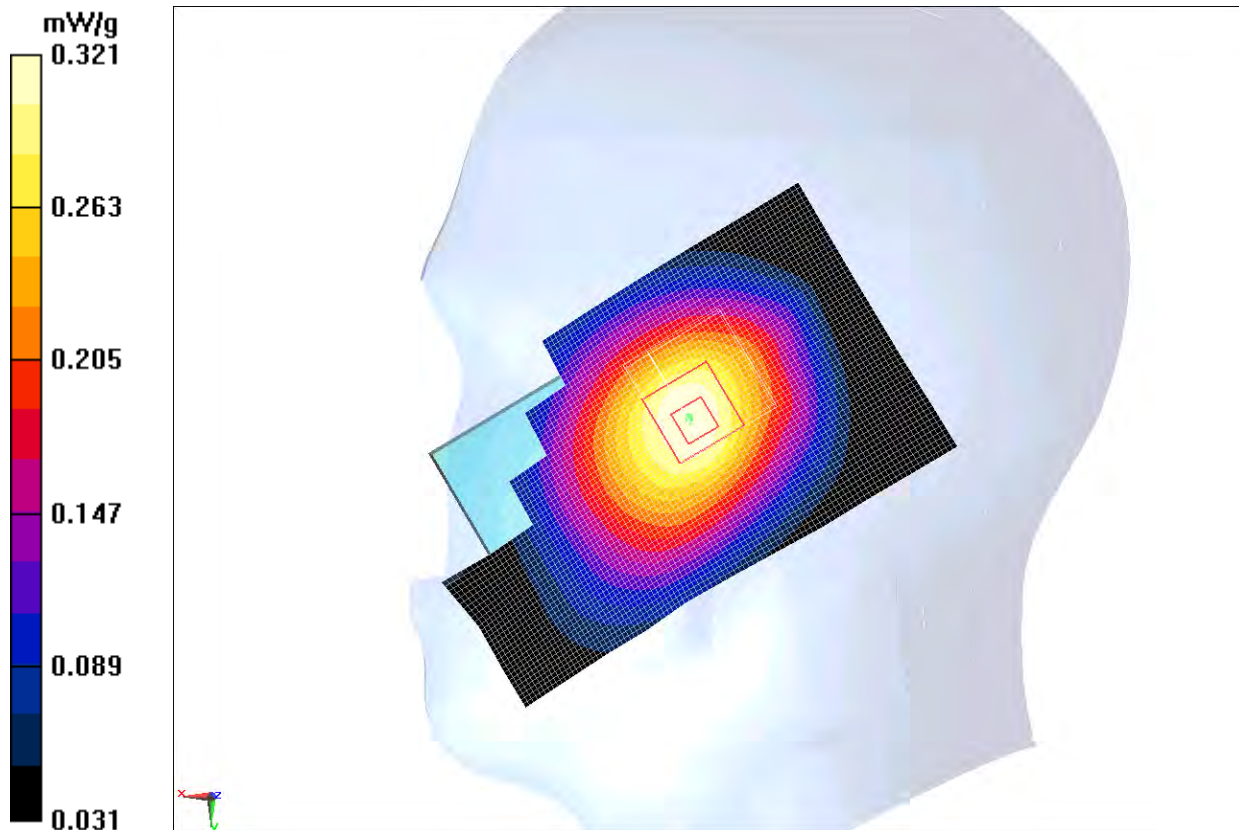


Fig.11 850 MHz CH190

### 850 Right Tilt Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.873$  mho/m;  $\epsilon_r = 40.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.251 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.331 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.298 mW/g

**SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.185 mW/g**

Maximum value of SAR (measured) = 0.252 mW/g

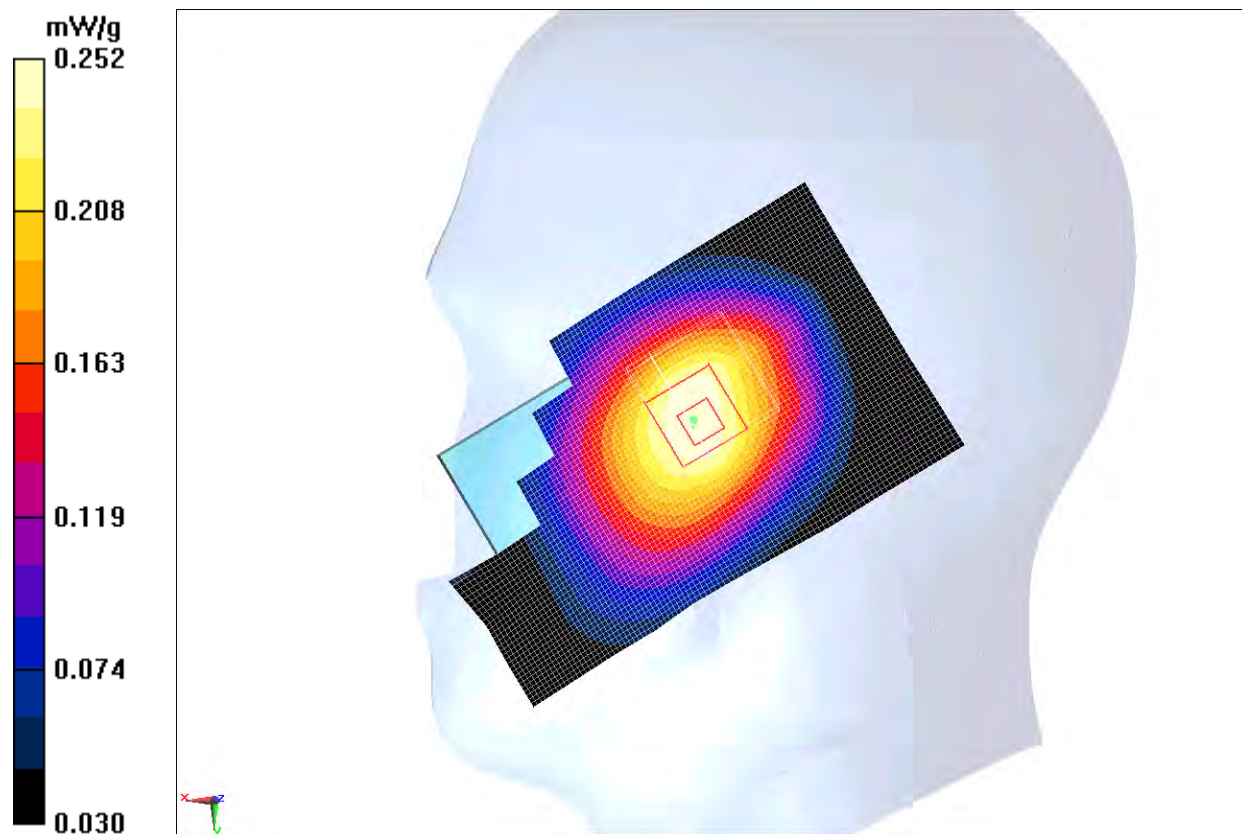


Fig. 12 850 MHz CH128



### 850 Body Towards Phantom High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Phantom High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.802 mW/g

**Toward Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.847 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.944 mW/g

**SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.588 mW/g**

Maximum value of SAR (measured) = 0.798 mW/g

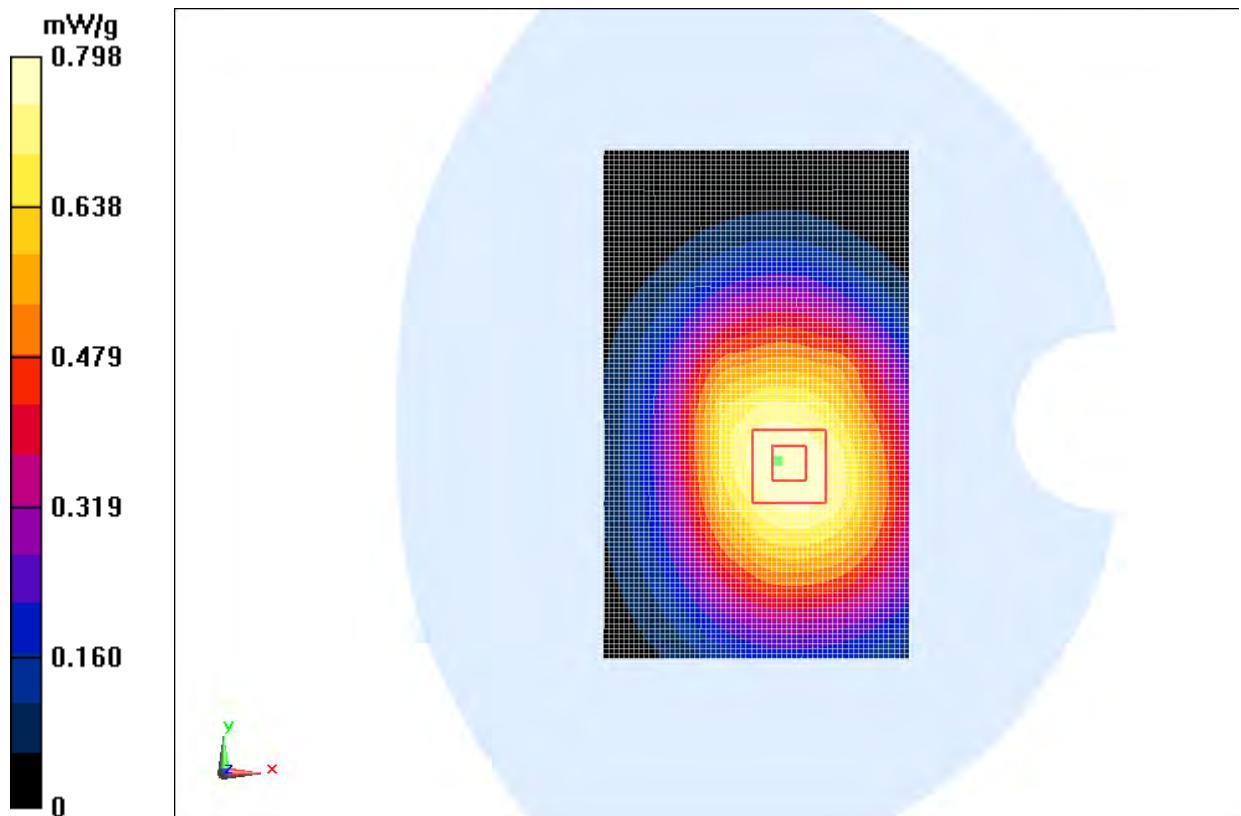


Fig. 13 850 MHz CH251

### 850 Body Towards Ground High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.12 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.172 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.355 mW/g

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.773 mW/g**

Maximum value of SAR (measured) = 1.10 mW/g


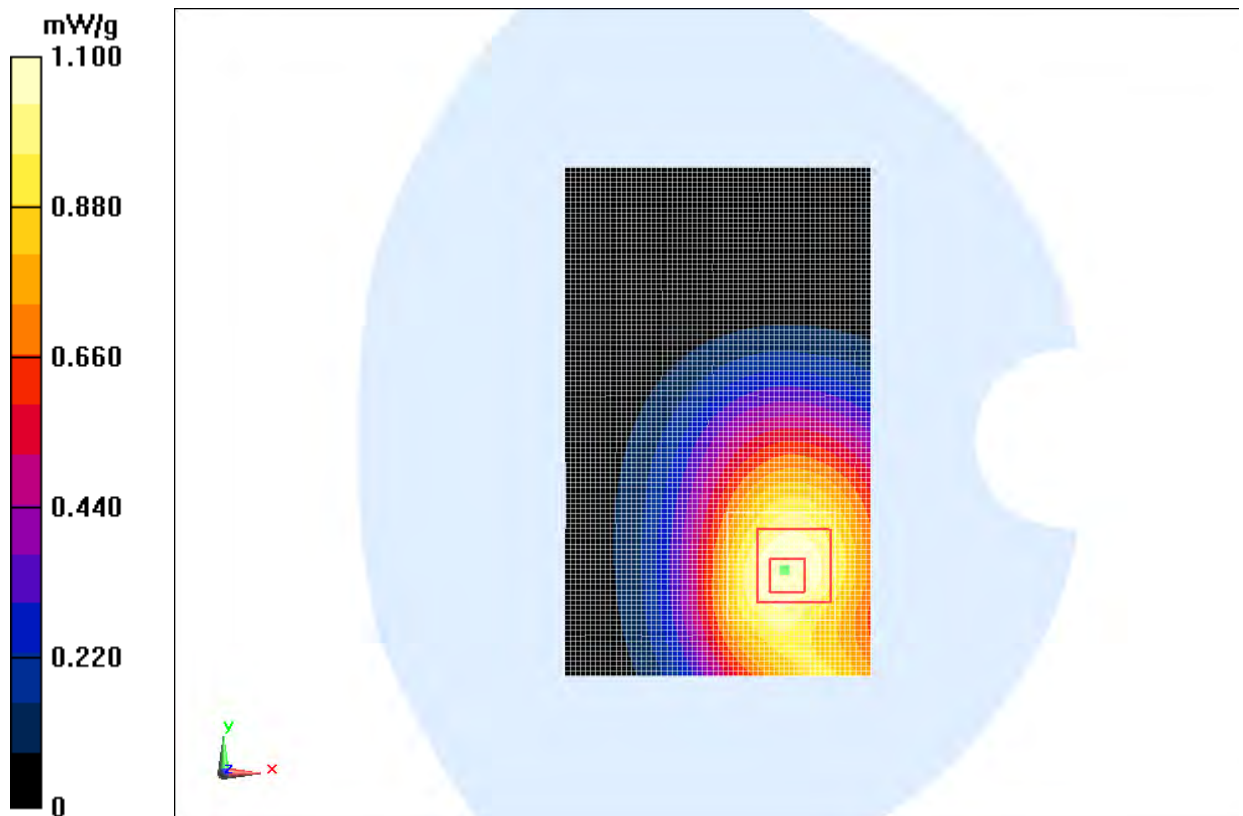


Fig. 14 850 MHz CH251

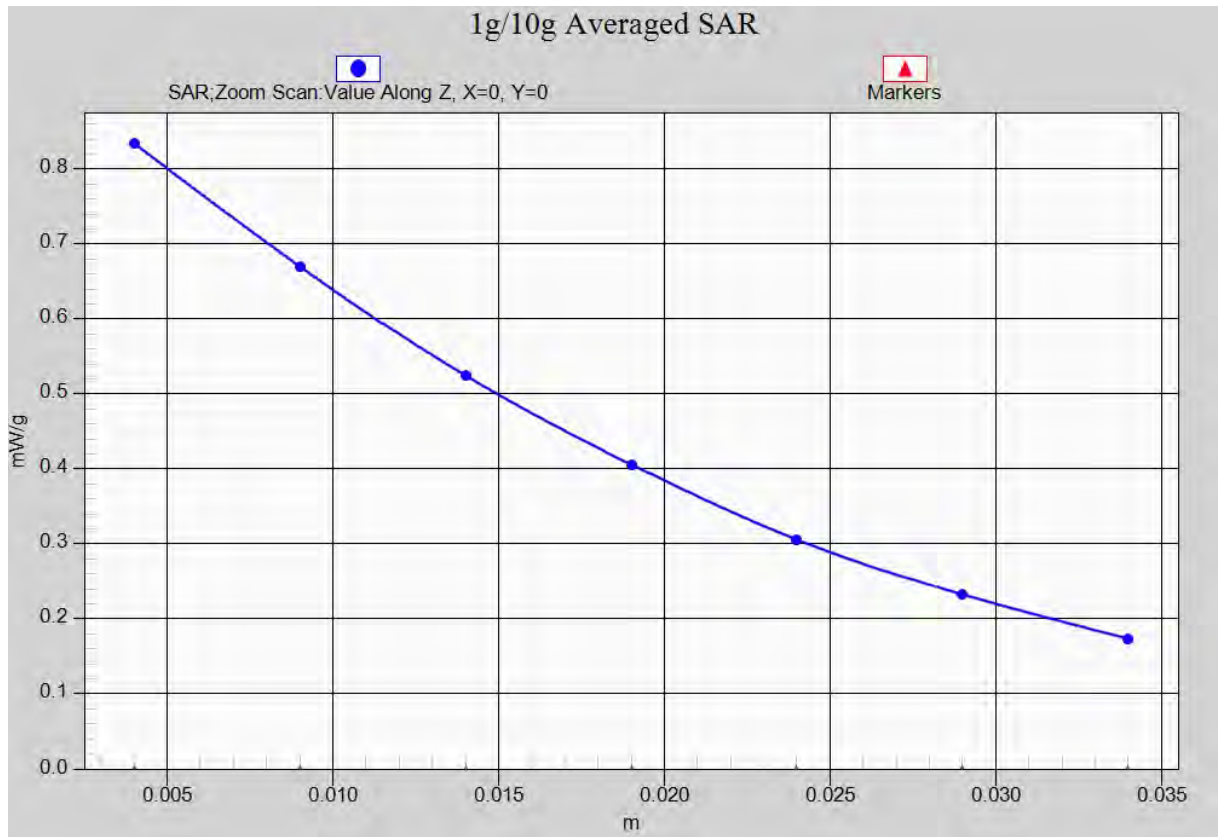

**Fig. 14-1 Z-Scan at power reference point (850 MHz CH251)**

### 850 Body Towards Ground Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.977 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.890 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.158 mW/g

**SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.681 mW/g**

Maximum value of SAR (measured) = 0.973 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.890 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.197 mW/g

**SAR(1 g) = 0.788 mW/g; SAR(10 g) = 0.558 mW/g**

Maximum value of SAR (measured) = 0.886 mW/g

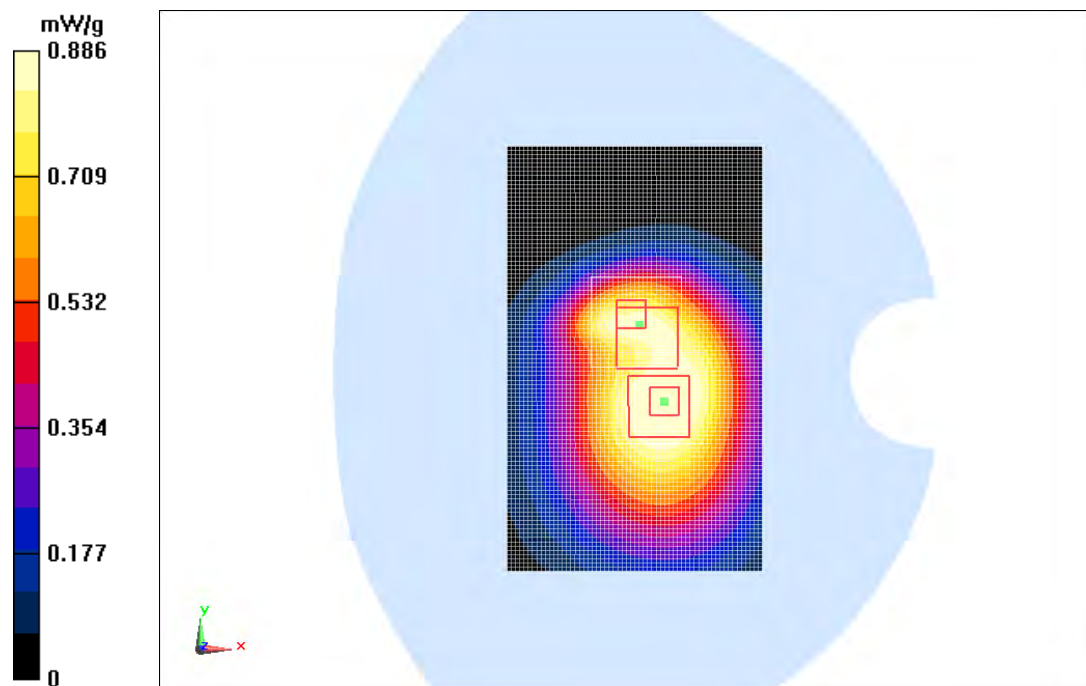


Fig. 15 850 MHz CH190



### 850 Body Towards Ground Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.982$  mho/m;  $\epsilon_r = 54.364$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.738 mW/g

**Toward Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.306 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.877 mW/g

**SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.519 mW/g**

Maximum value of SAR (measured) = 0.735 mW/g

**Toward Ground Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.306 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.905 mW/g

**SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.440 mW/g**

Maximum value of SAR (measured) = 0.697 mW/g

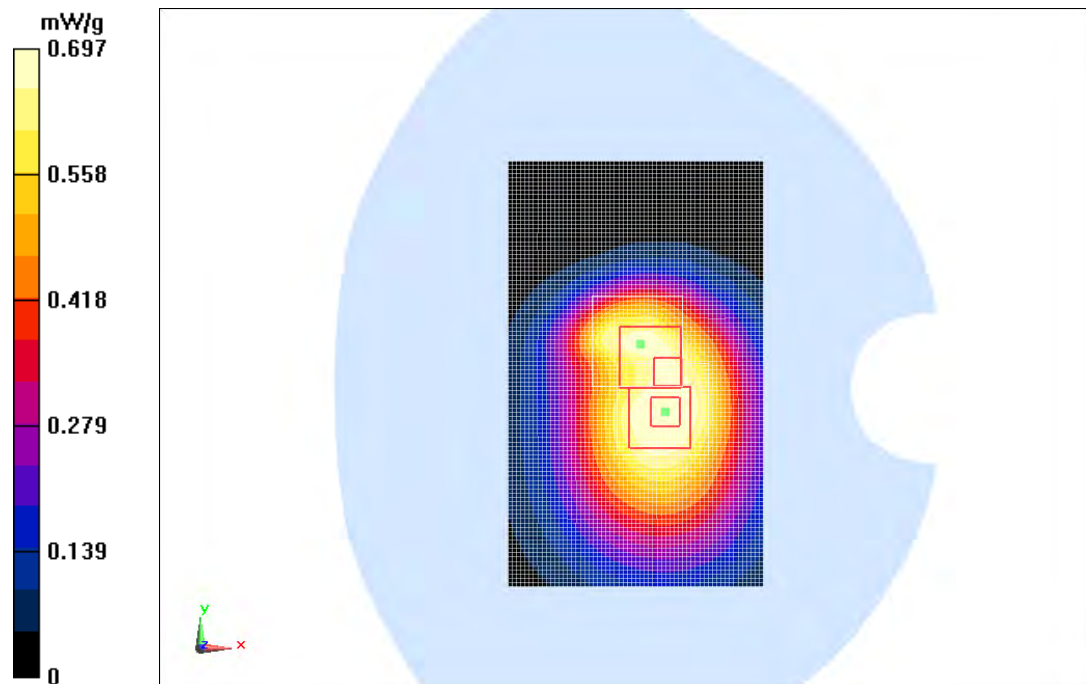


Fig. 16 850 MHz CH128

### 850 Body Left Side High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Left Side High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.779 mW/g

**Left Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.498 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.028 mW/g

**SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.502 mW/g**

Maximum value of SAR (measured) = 0.769 mW/g

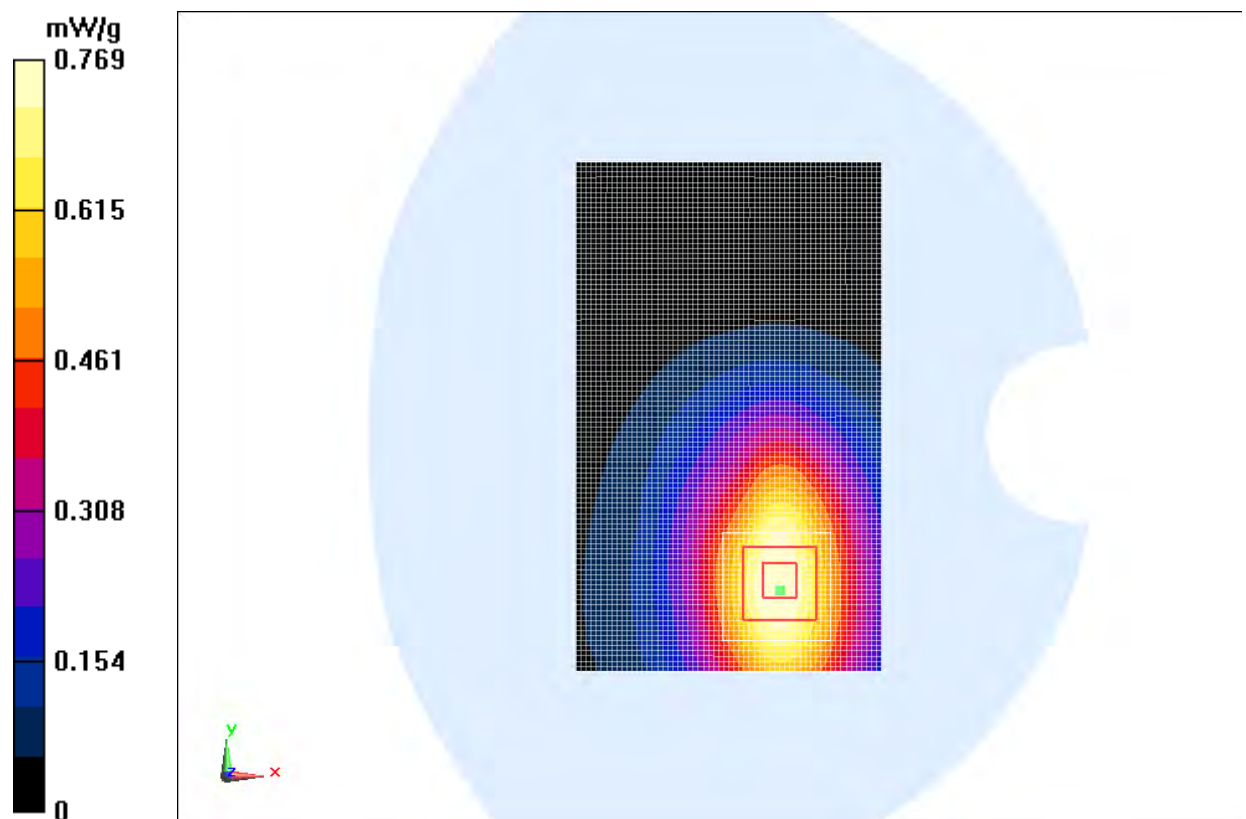


Fig. 17 850 MHz CH251

### 850 Body Right Side High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Right Side High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.716 mW/g

**Right Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.400 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.910 mW/g

**SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.461 mW/g**

Maximum value of SAR (measured) = 0.713 mW/g

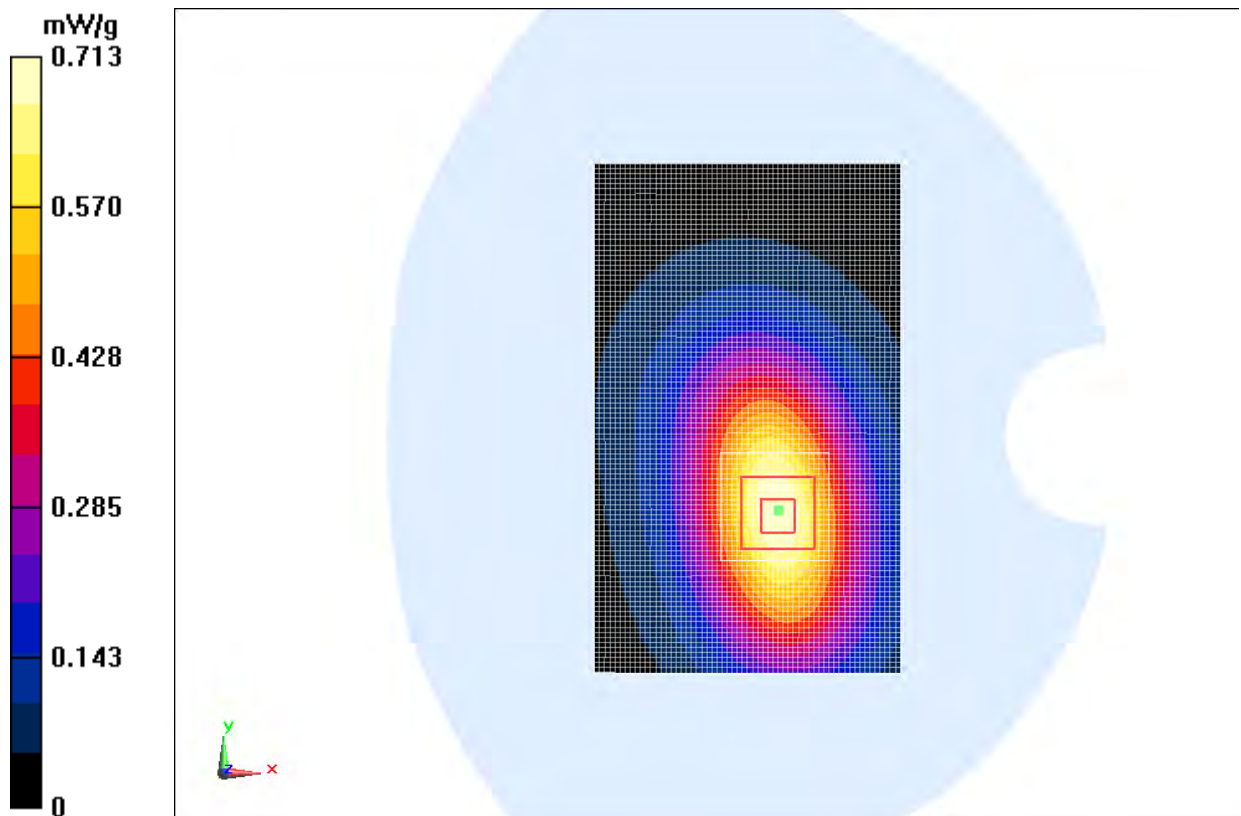


Fig. 18 850 MHz CH251

### 850 Body Bottom Side High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Bottom Side High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.192 mW/g

**Bottom Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.757 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.278 mW/g

**SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.103 mW/g**

Maximum value of SAR (measured) = 0.189 mW/g

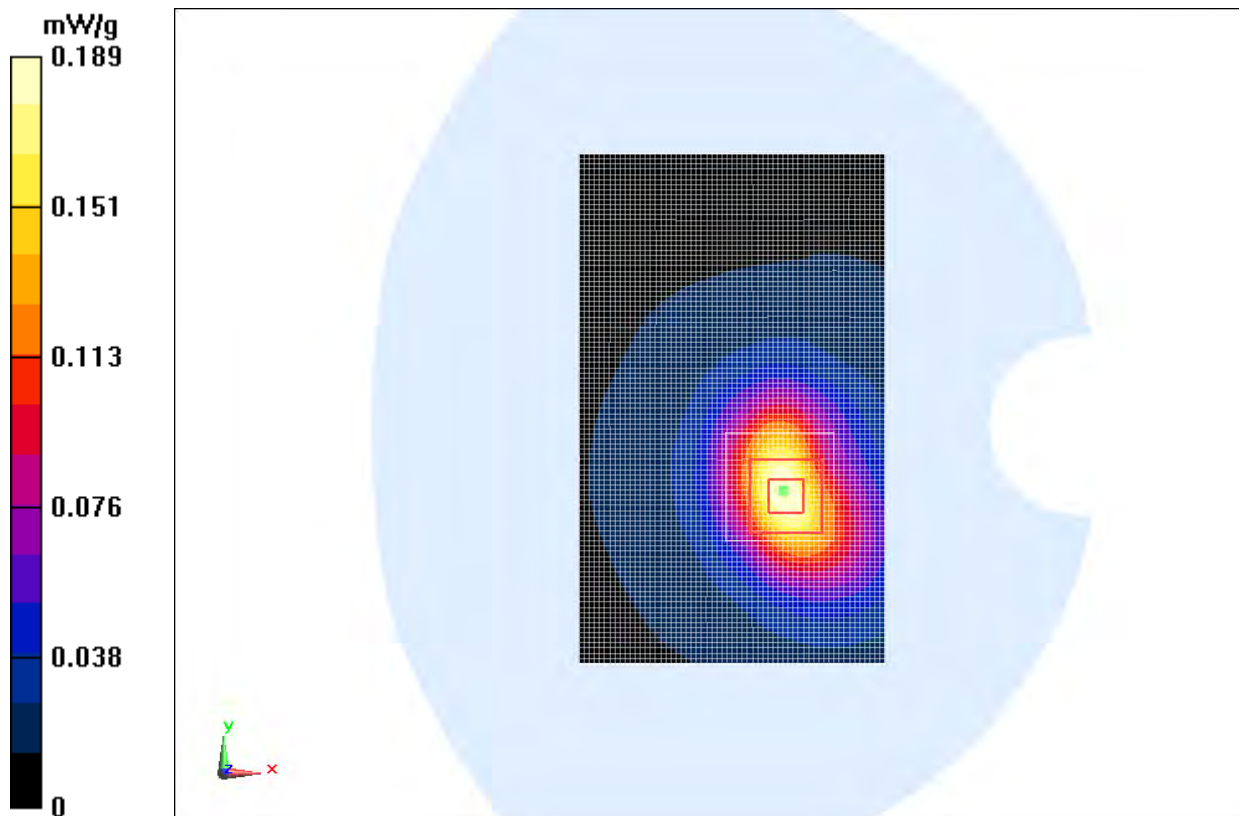


Fig. 19 850 MHz CH251

### 850 Body Towards Ground High with EGPRS

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 EGPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.09 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.376 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.298 mW/g

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.750 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.376 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.316 mW/g

**SAR(1 g) = 0.873 mW/g; SAR(10 g) = 0.609 mW/g**

Maximum value of SAR (measured) = 0.977 mW/g

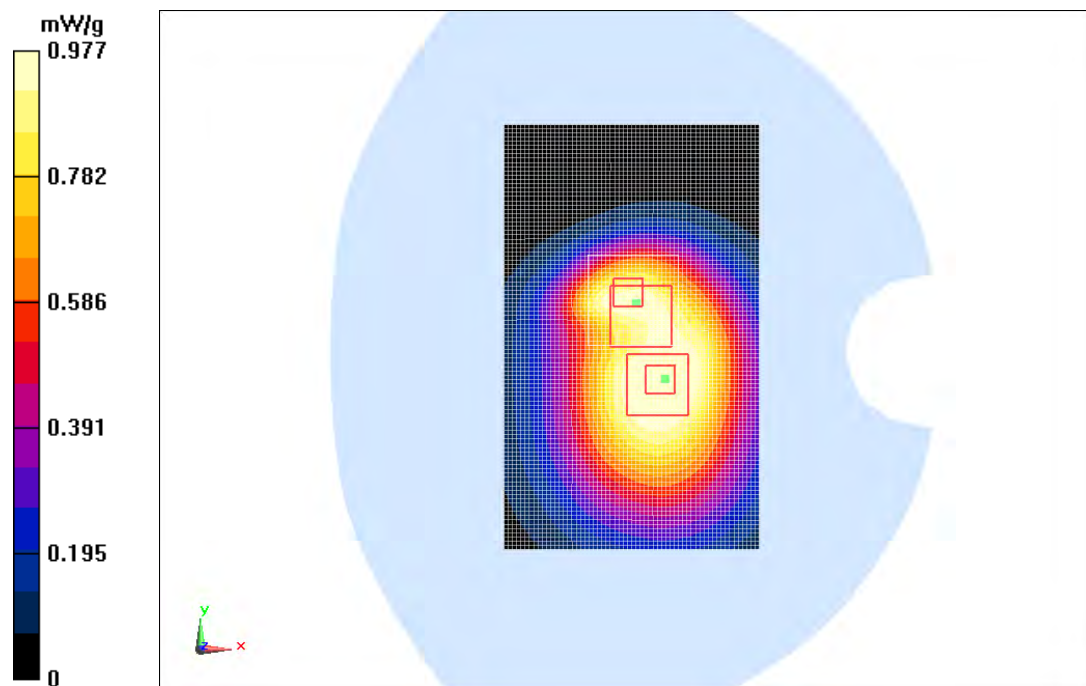


Fig. 20 850 MHz CH251



### 850 Body Towards Ground High with Headset CCB3160A11C1

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.822 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.204 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.003 mW/g

**SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.572 mW/g**

Maximum value of SAR (measured) = 0.824 mW/g

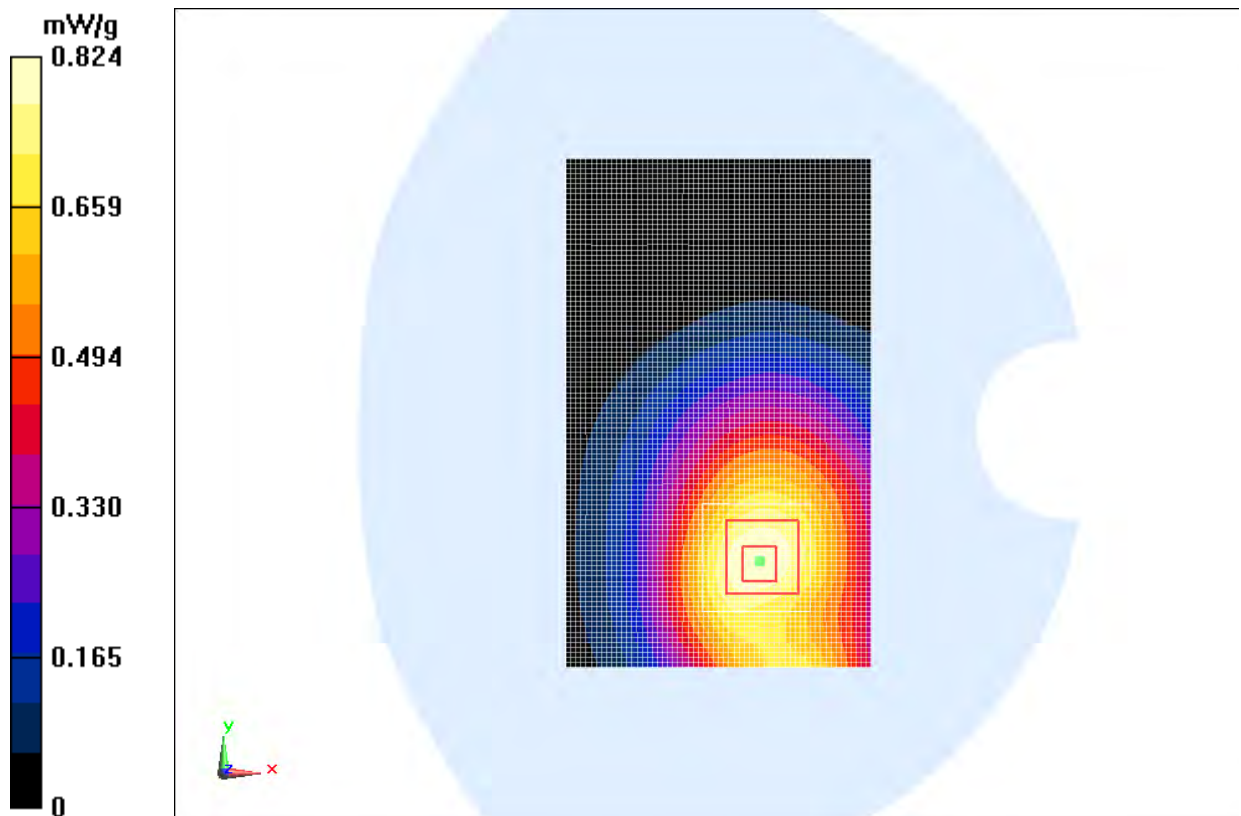


Fig. 21 850 MHz CH251

### 850 Body Towards Ground High with Headset CCB3160A11C2

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.008$  mho/m;  $\epsilon_r = 54.121$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.837 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.795 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.016 mW/g

**SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.587 mW/g**

Maximum value of SAR (measured) = 0.829 mW/g

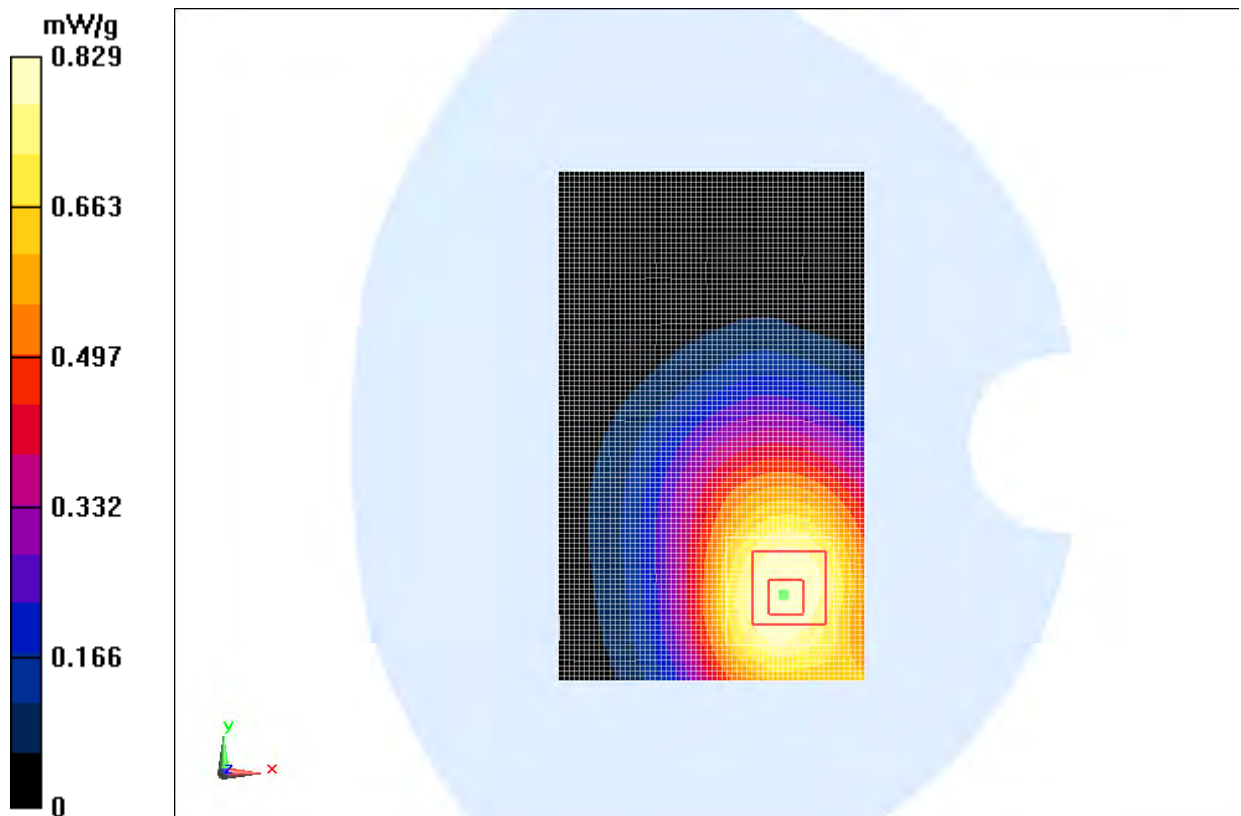


Fig. 22 850 MHz CH251

### 1900 Left Cheek High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.396$  mho/m;  $\epsilon_r = 40.896$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.440 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.319 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.584 mW/g

**SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.243 mW/g**

Maximum value of SAR (measured) = 0.419 mW/g

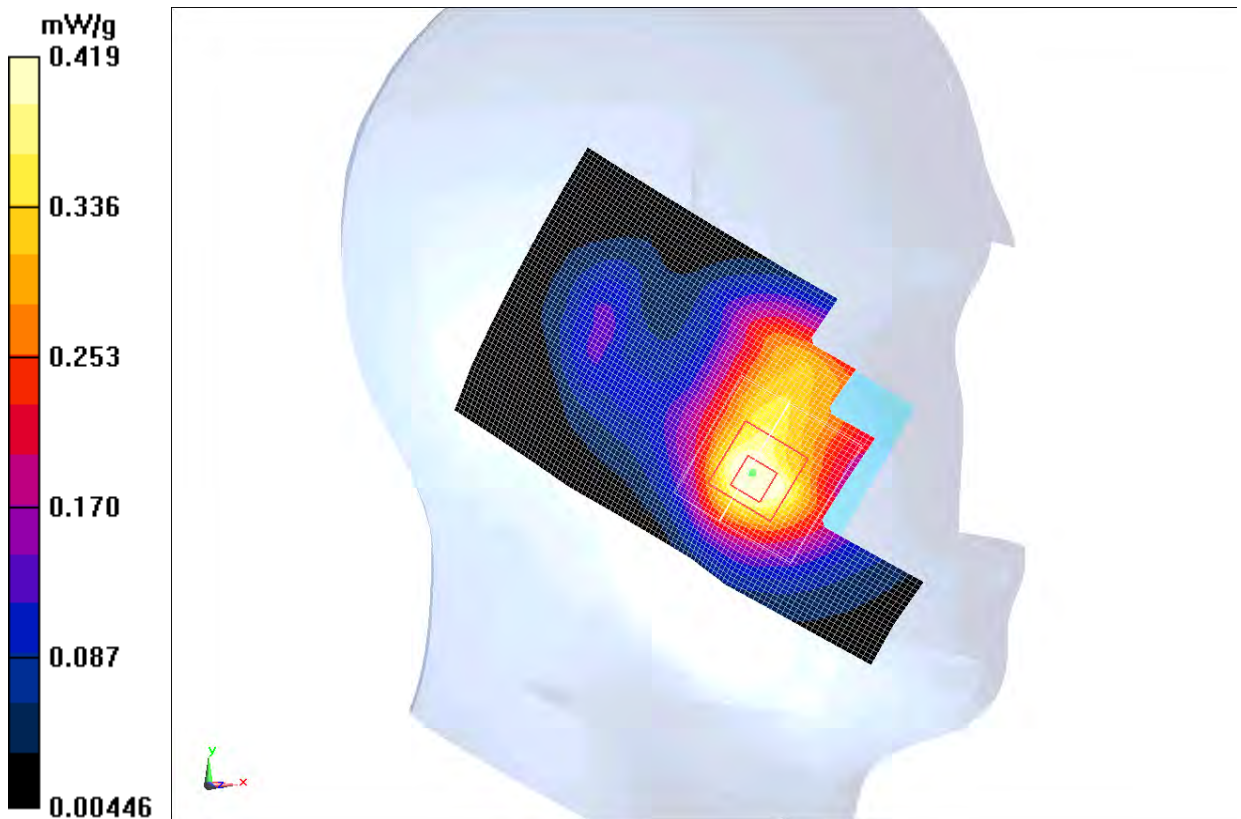


Fig. 23 1900 MHz CH810



**1900 Left Cheek Middle**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head GSM1900

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.368$  mho/m;  $\epsilon_r = 41.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.420 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.225 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.577 mW/g

**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.241 mW/g**

Maximum value of SAR (measured) = 0.421 mW/g

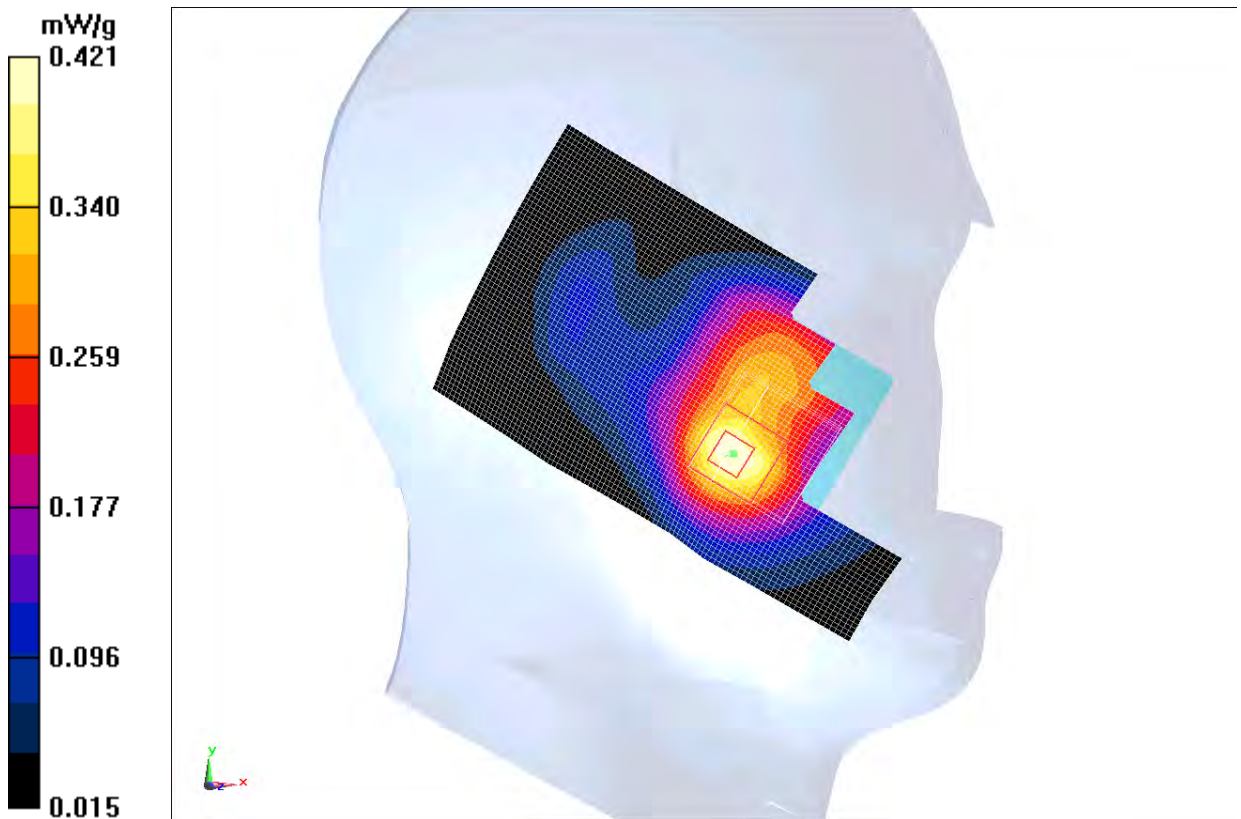

**Fig. 24 1900 MHz CH661**

**1900 Left Cheek Low**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.338$  mho/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.399 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.780 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.533 mW/g

**SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.231 mW/g**

Maximum value of SAR (measured) = 0.396 mW/g

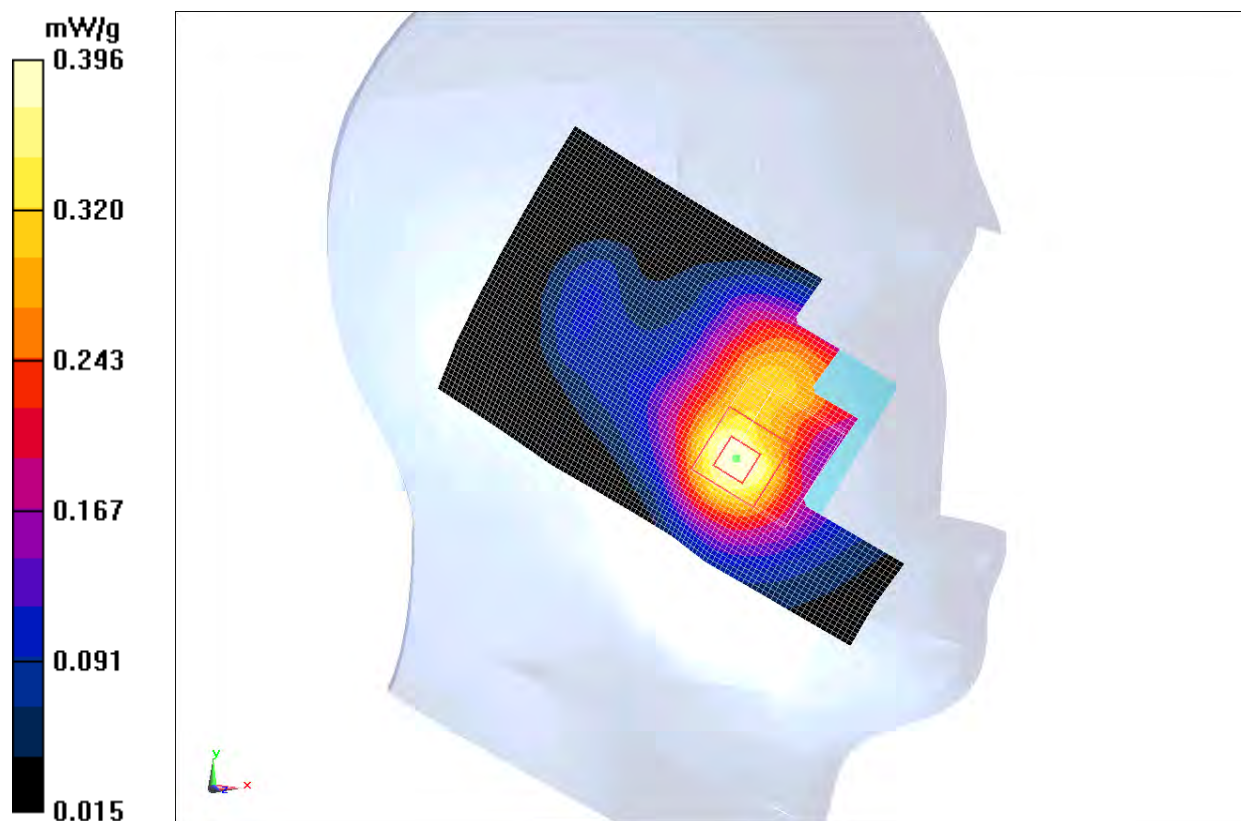

**Fig. 25 1900 MHz CH512**

### 1900 Left Tilt High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.396$  mho/m;  $\epsilon_r = 40.896$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.198 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.681 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.284 mW/g

**SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.095 mW/g**

Maximum value of SAR (measured) = 0.189 mW/g

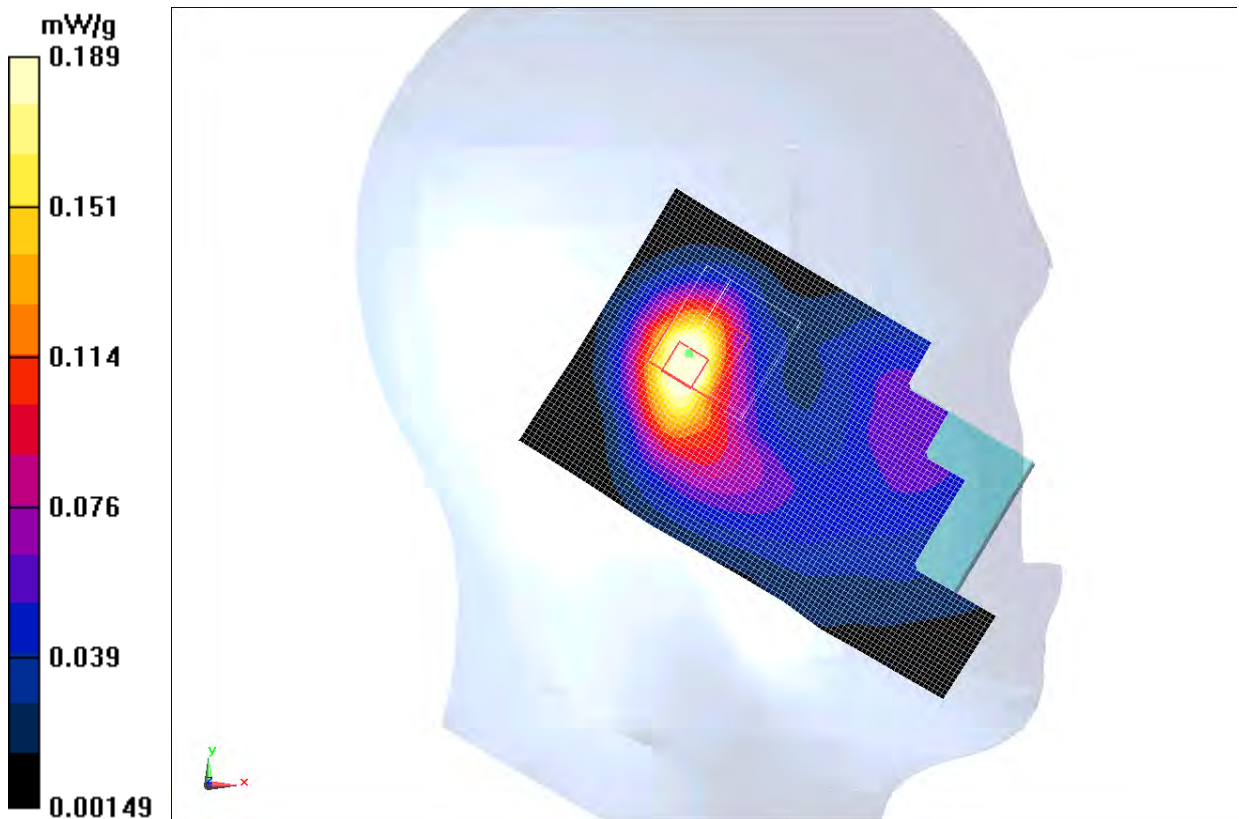


Fig. 26 1900 MHz CH810

**1900 Left Tilt Middle**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.368$  mho/m;  $\epsilon_r = 41.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.197 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.504 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.268 mW/g

**SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.093 mW/g**

Maximum value of SAR (measured) = 0.184 mW/g

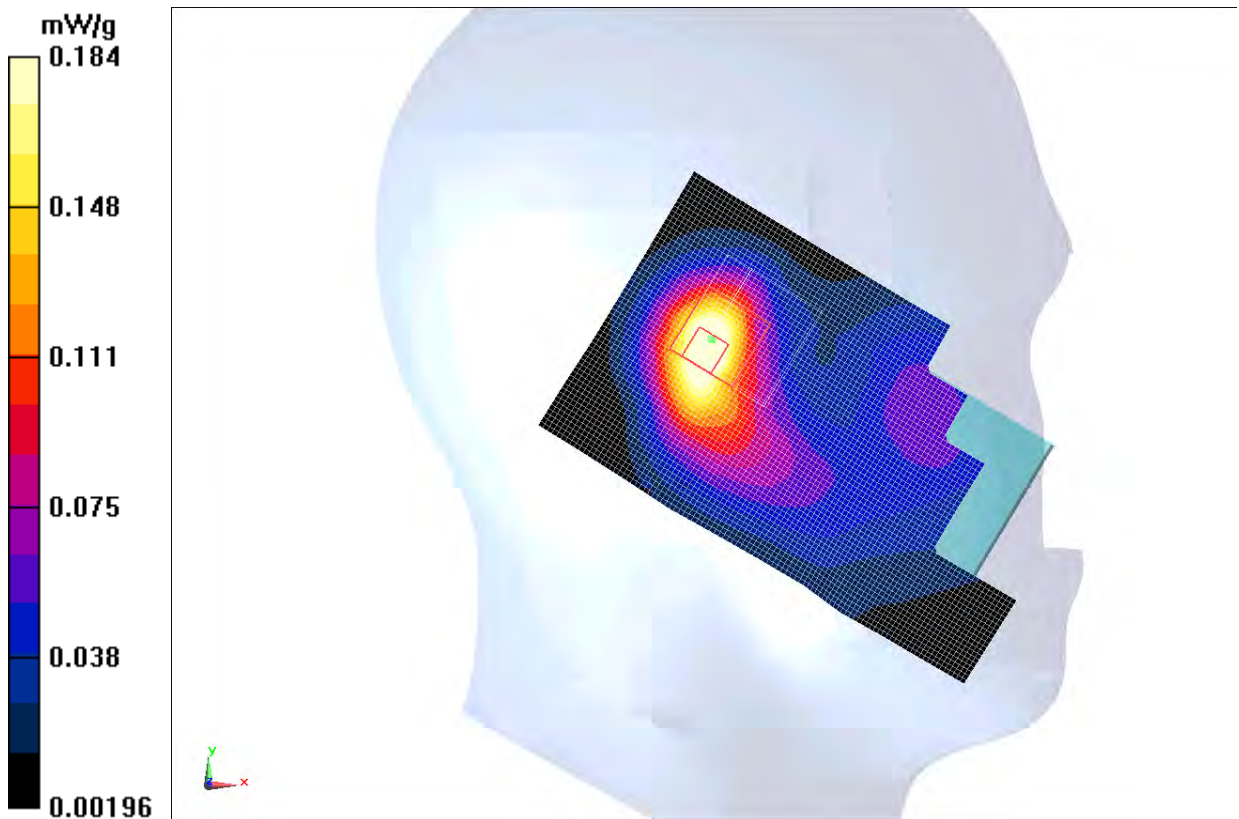

**Fig. 27 1900 MHz CH661**



**1900 Left Tilt Low**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.338$  mho/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.179 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.975 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.246 mW/g

**SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.085 mW/g**

Maximum value of SAR (measured) = 0.169 mW/g

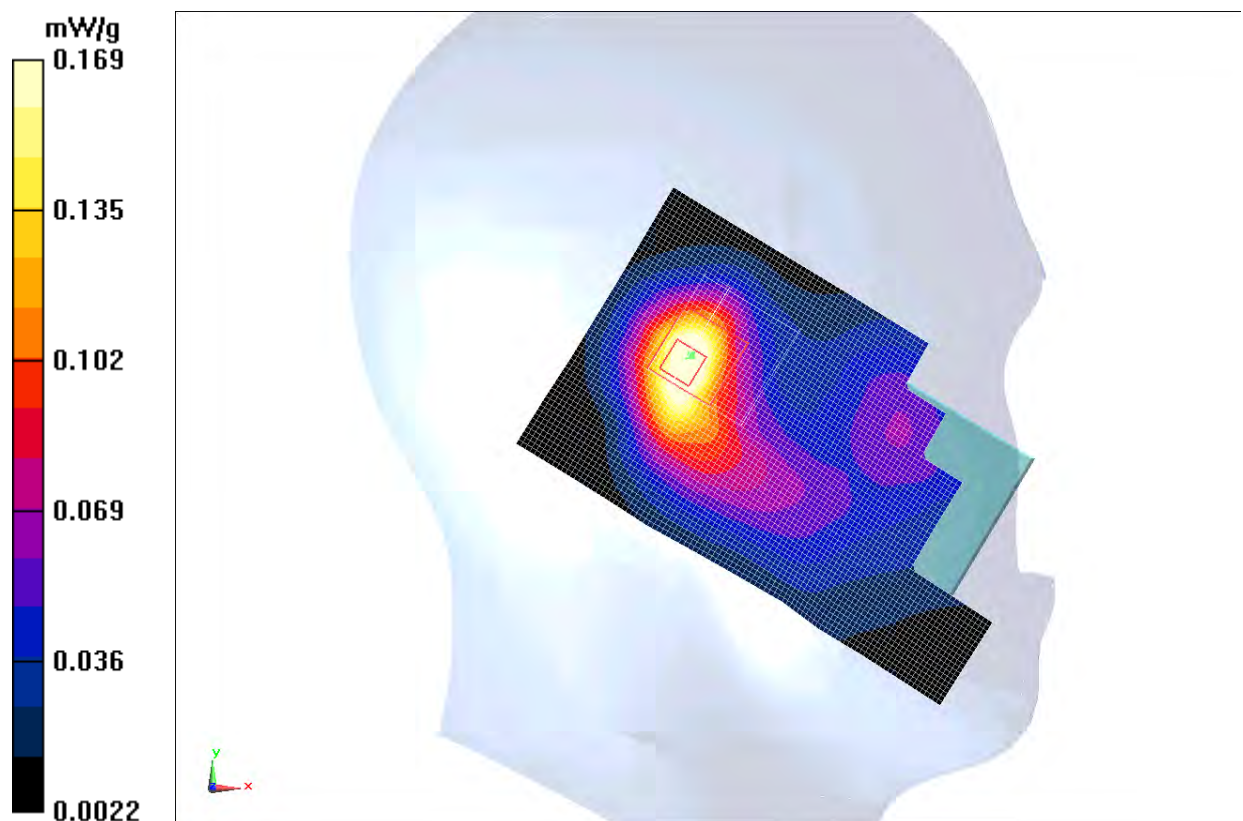


Fig. 28 1900 MHz CH512

### 1900 Right Cheek High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.396$  mho/m;  $\epsilon_r = 40.896$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.616 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.012 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.954 mW/g

**SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.334 mW/g**

Maximum value of SAR (measured) = 0.623 mW/g


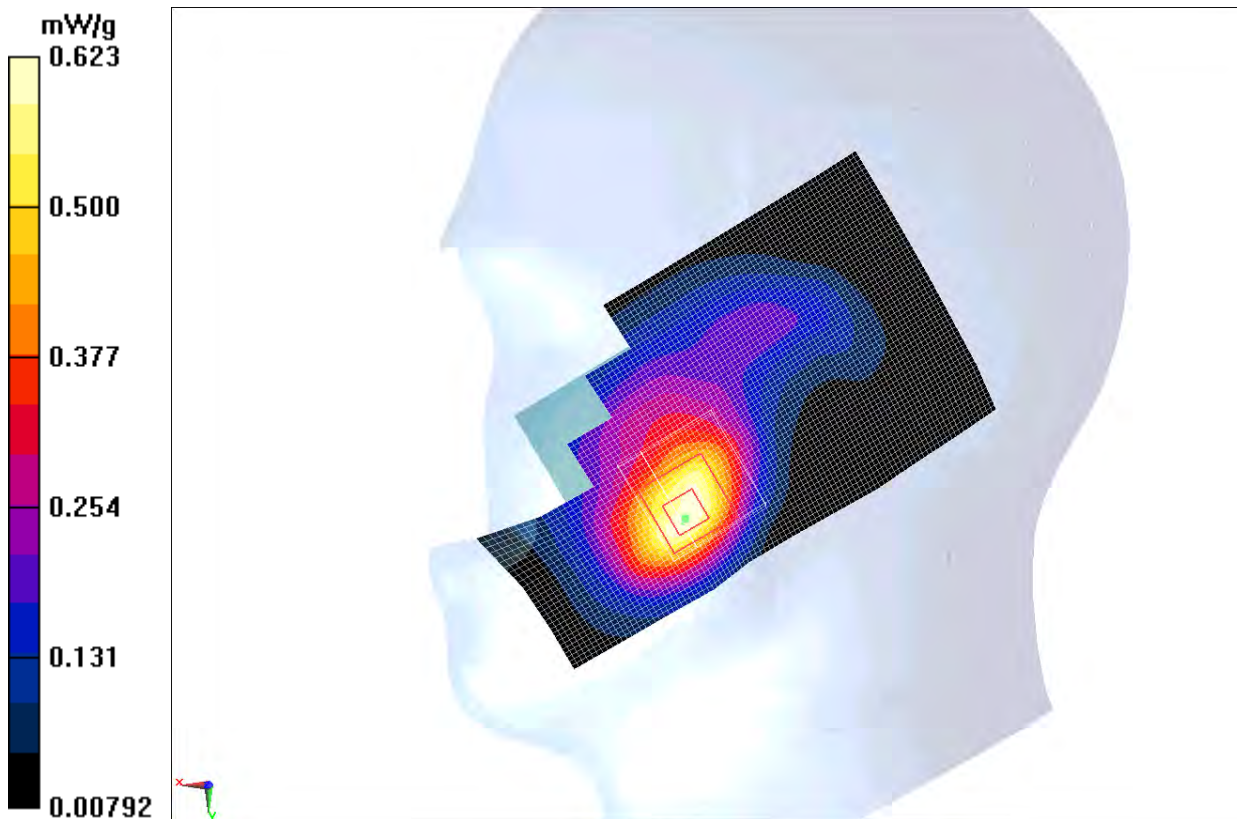


Fig. 29 1900 MHz CH810



**Fig. 29-1 Z-Scan at power reference point (1900 MHz CH810)**

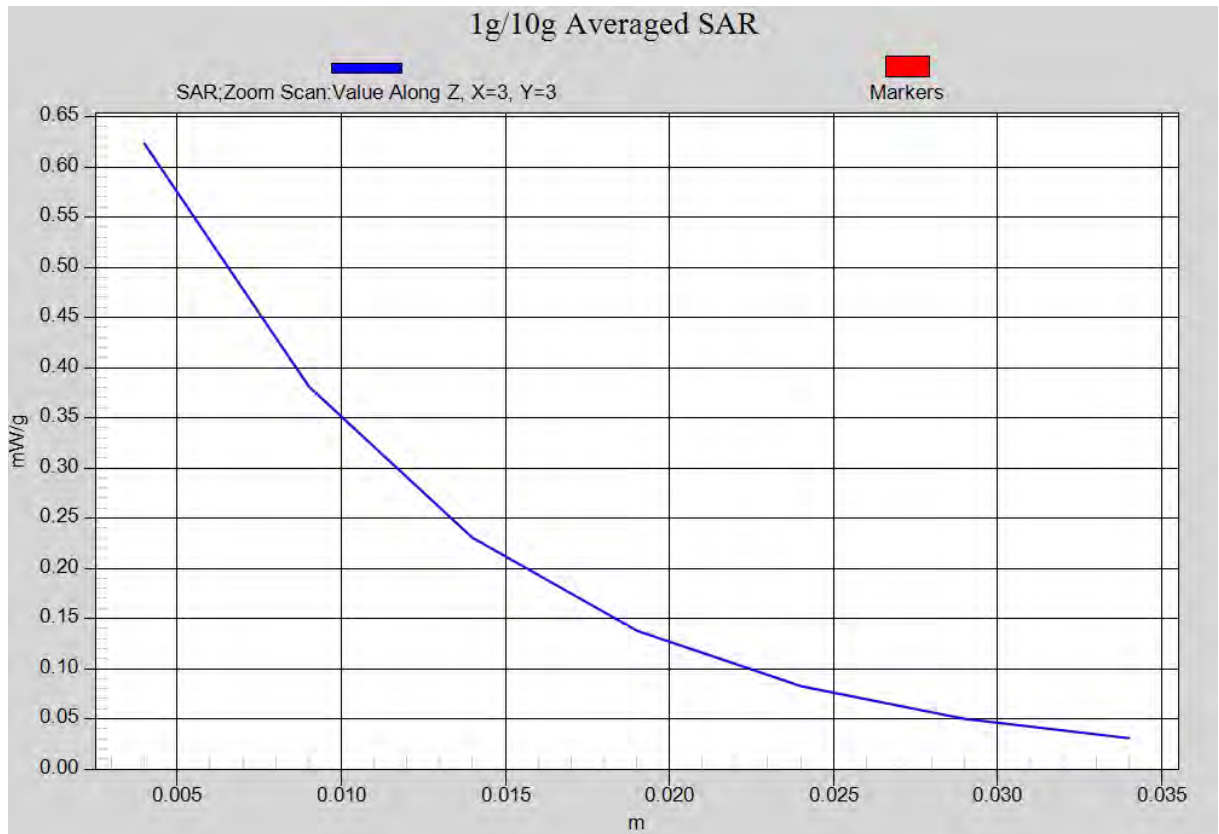

**1900 Right Cheek Middle**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.368$  mho/m;  $\epsilon_r = 41.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.585 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.703 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.930 mW/g

**SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.317 mW/g**

Maximum value of SAR (measured) = 0.597 mW/g

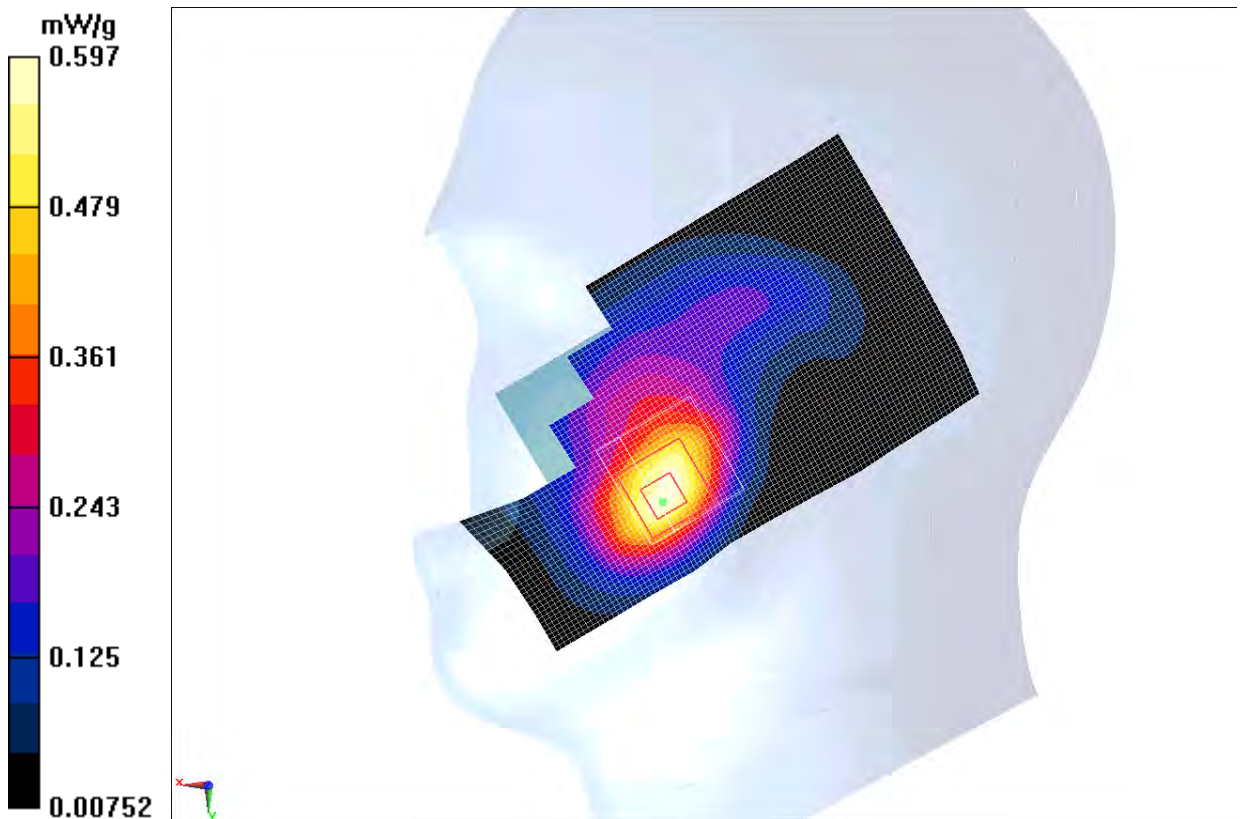


Fig. 30 1900 MHz CH661

**1900 Right Cheek Low**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.338$  mho/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.513 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.770 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.809 mW/g

**SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.521 mW/g

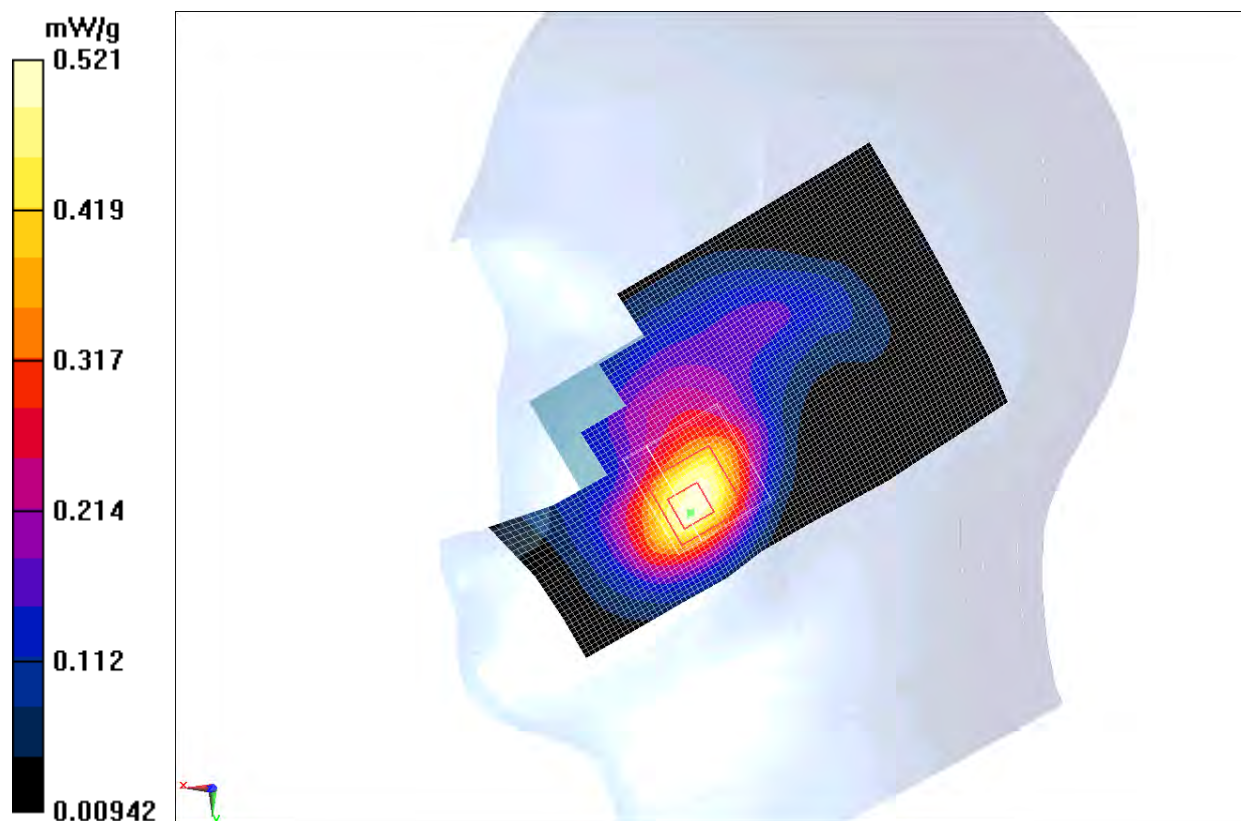


Fig. 31 1900 MHz CH512

### 1900 Right Tilt High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.396$  mho/m;  $\epsilon_r = 40.896$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.238 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.081 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.288 mW/g

**SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.106 mW/g**

Maximum value of SAR (measured) = 0.197 mW/g

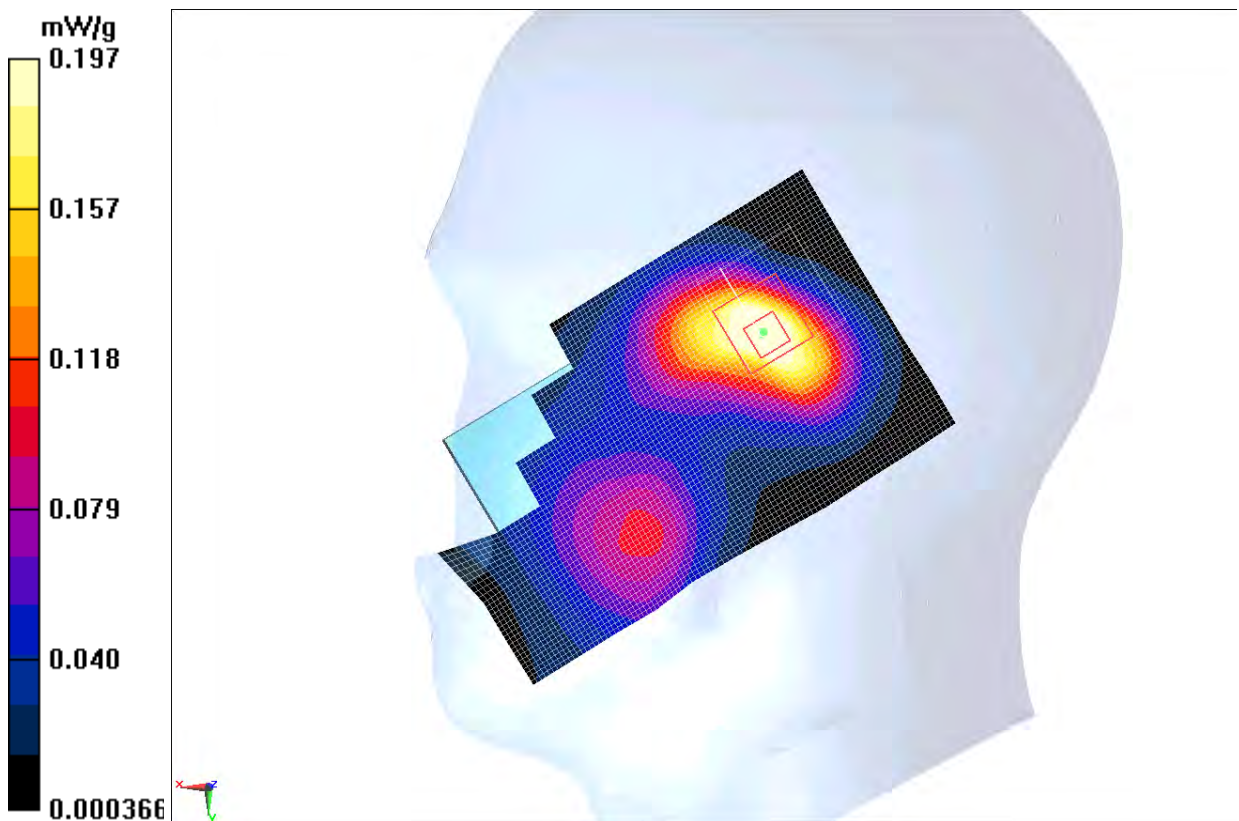


Fig. 32 1900 MHz CH810

**1900 Right Tilt Middle**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.368$  mho/m;  $\epsilon_r = 41.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.217 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.803 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.259 mW/g

**SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.178 mW/g

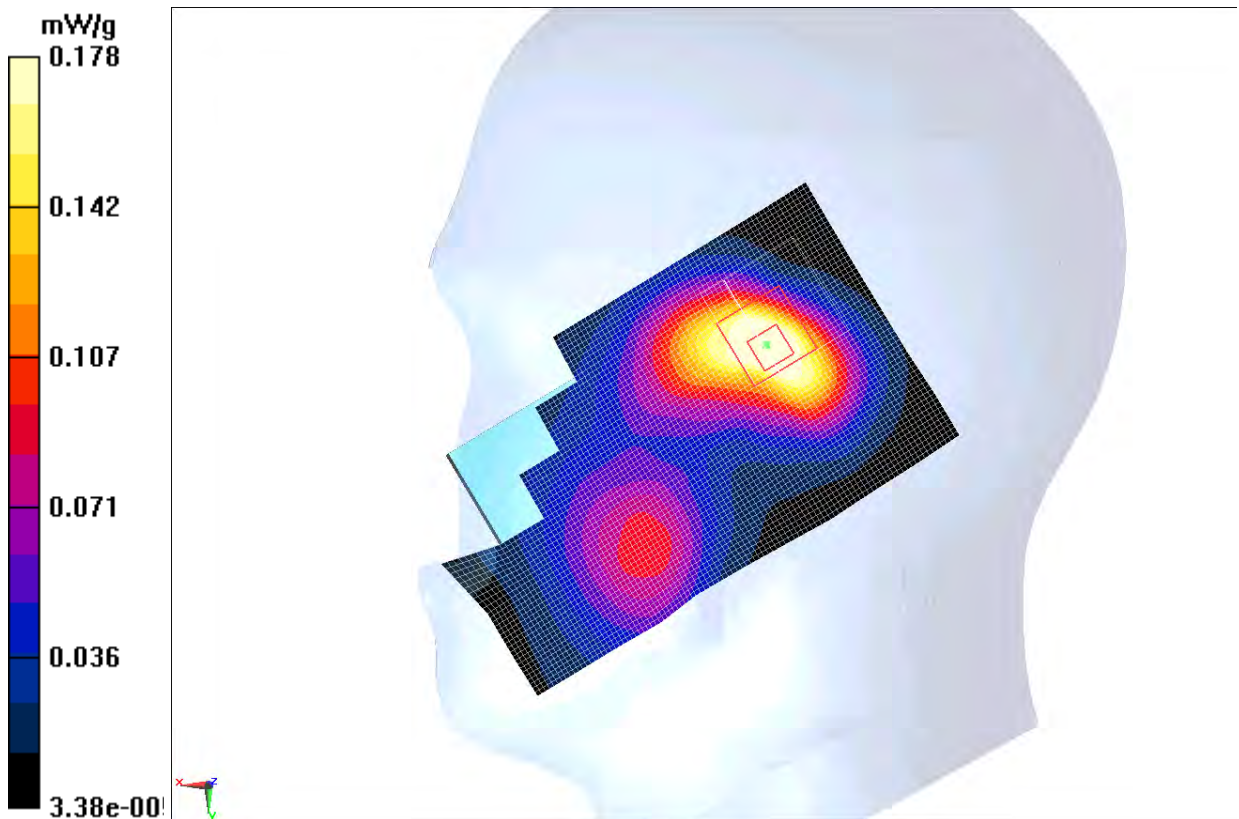


Fig.33 1900 MHz CH661



**1900 Right Tilt Low**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.338$  mho/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.182 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.132 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.221 mW/g

**SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.084 mW/g**

Maximum value of SAR (measured) = 0.151 mW/g

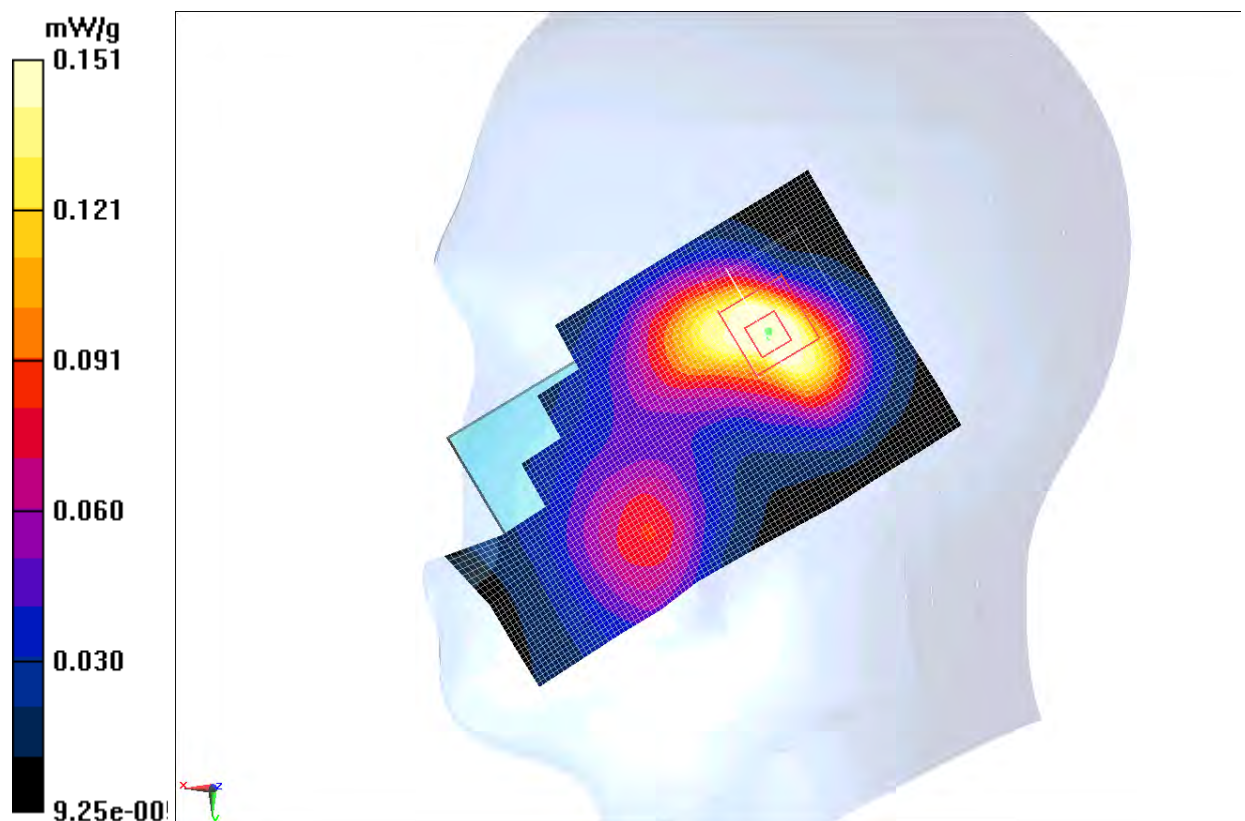

**Fig. 34 1900 MHz CH512**

### 1900 Body Towards Phantom High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.513$  mho/m;  $\epsilon_r = 52.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Phantom High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.832 mW/g

**Toward Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.151 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.296 mW/g

**SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.451 mW/g**

Maximum value of SAR (measured) = 0.802 mW/g

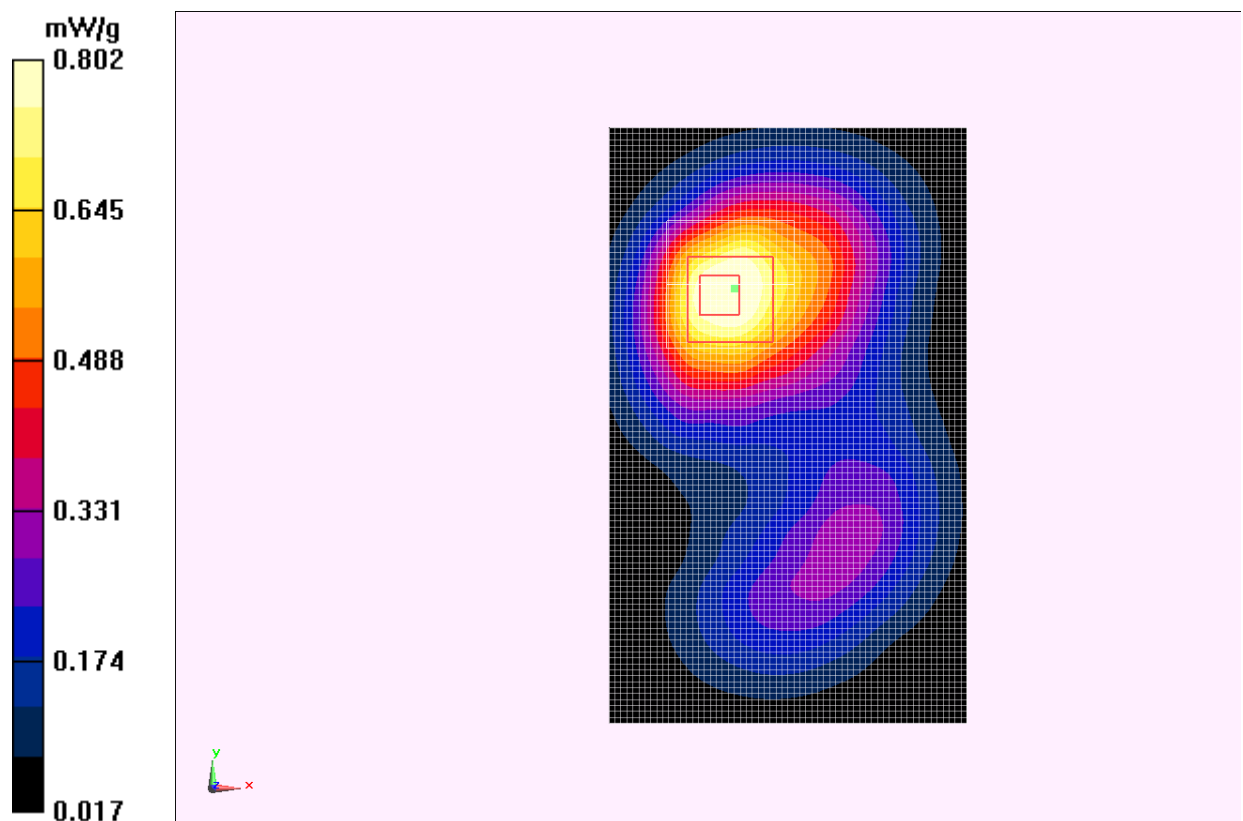


Fig. 35 1900 MHz CH810

### 1900 Body Towards Ground High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.513$  mho/m;  $\epsilon_r = 52.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.993 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.471 mW/g

**SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.541 mW/g**

Maximum value of SAR (measured) = 0.954 mW/g

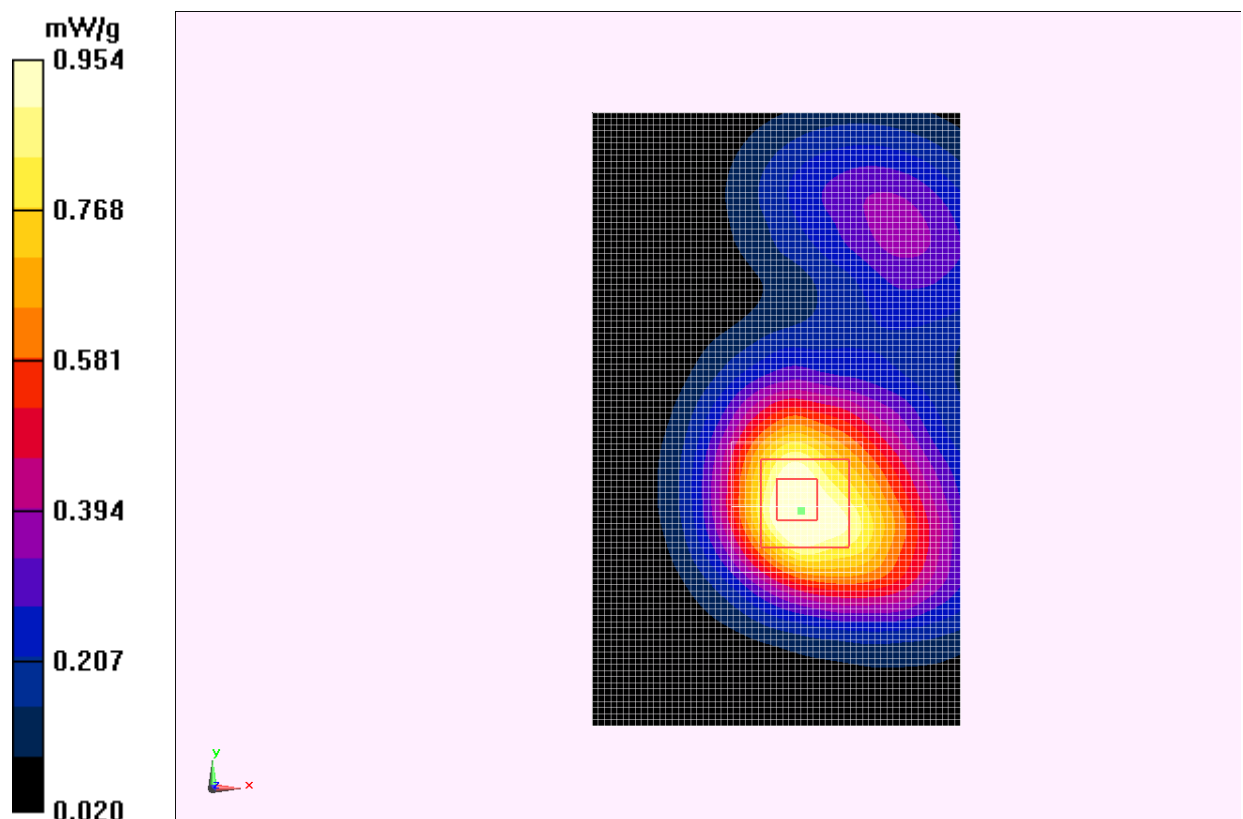


Fig. 36 1900 MHz CH810



### 1900 Body Towards Ground Middle

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.483$  mho/m;  $\epsilon_r = 52.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.925 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.520 mW/g

**SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.549 mW/g**

Maximum value of SAR (measured) = 0.992 mW/g


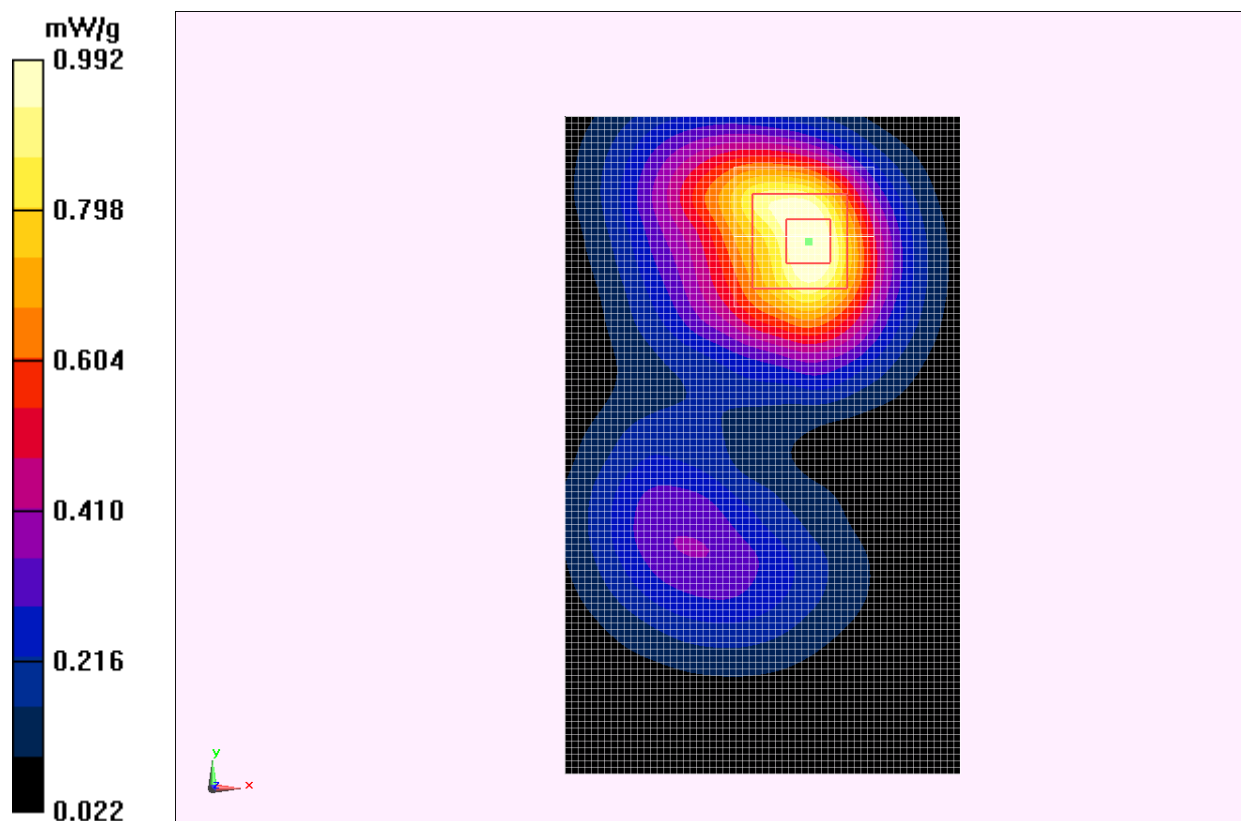


Fig. 37 1900 MHz CH661

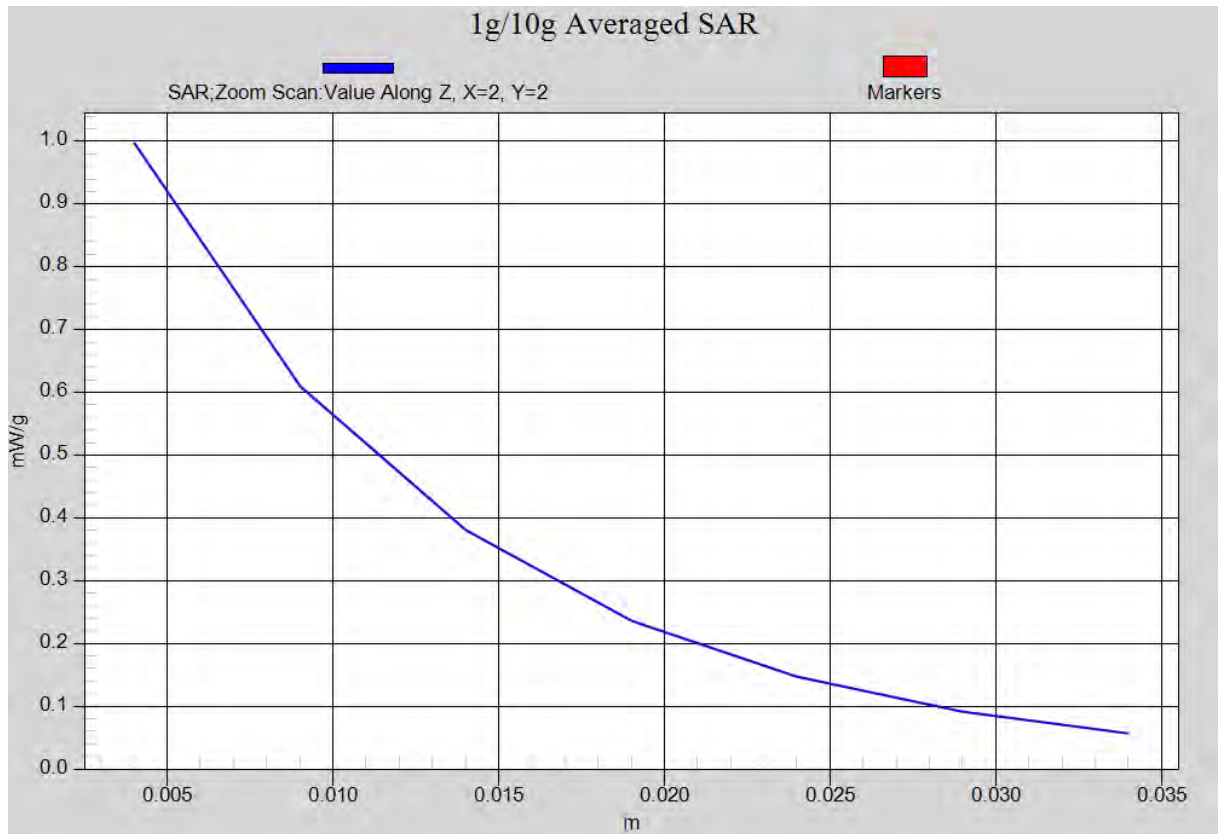

**Fig. 37-1 Z-Scan at power reference point (1900 MHz CH661)**

### 1900 Body Towards Ground Low

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 52.458$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g

**Toward Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.467 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.469 mW/g

**SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.542 mW/g**

Maximum value of SAR (measured) = 0.969 mW/g

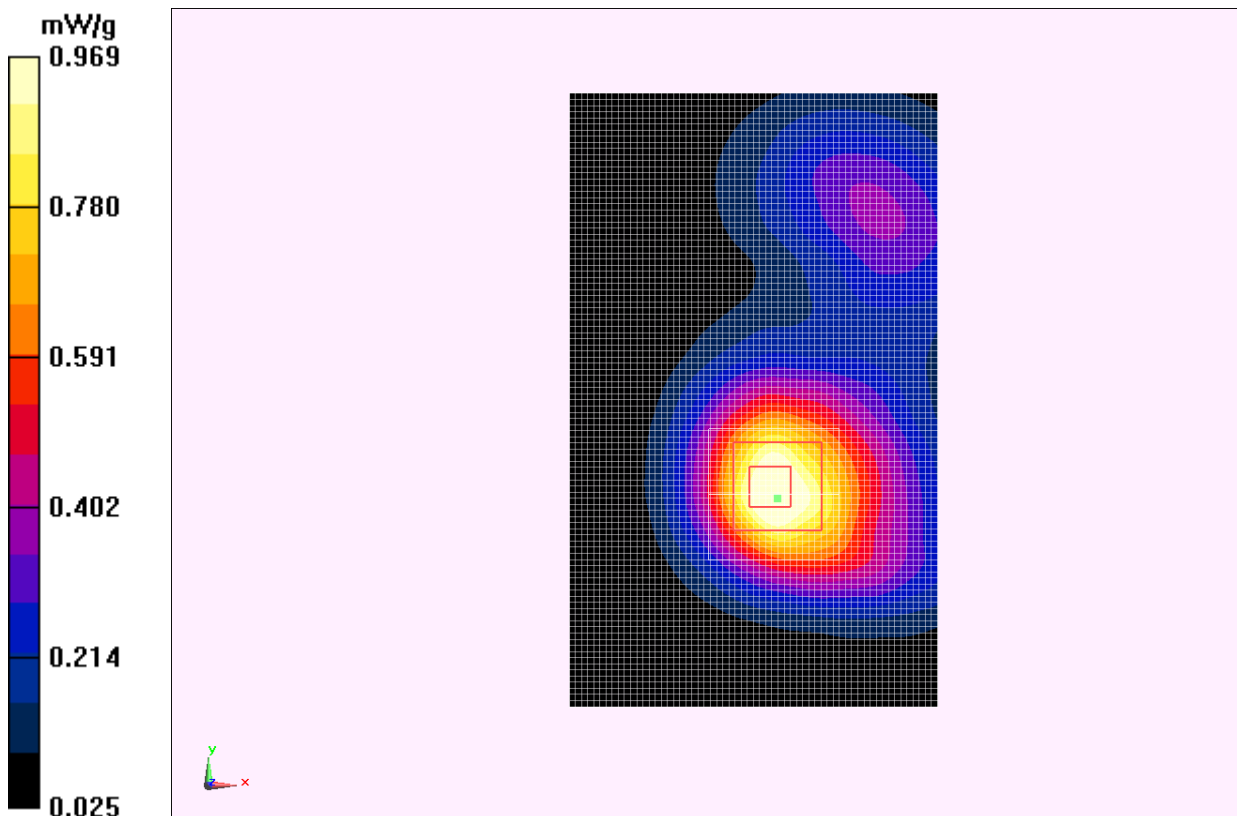


Fig. 38 1900 MHz CH512

### 1900 Body Left Side High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.513$  mho/m;  $\epsilon_r = 52.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Left Side/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.214 mW/g

**Left Side/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.313 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.328 mW/g

**SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.122 mW/g**

Maximum value of SAR (measured) = 0.219 mW/g

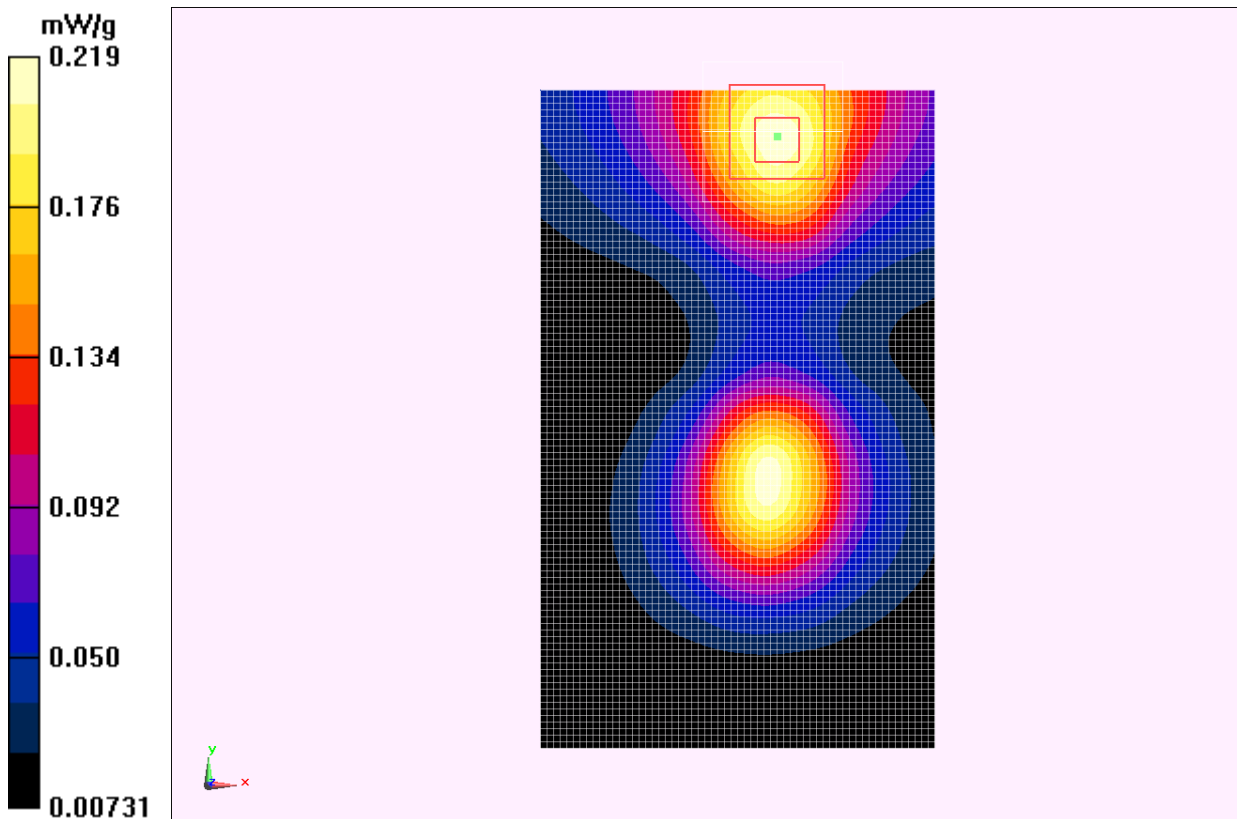


Fig. 39 1900 MHz CH810

### 1900 Body Right Side High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.513$  mho/m;  $\epsilon_r = 52.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Right Side/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.328 mW/g

**Right Side/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.228 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.485 mW/g

**SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.165 mW/g**

Maximum value of SAR (measured) = 0.310 mW/g

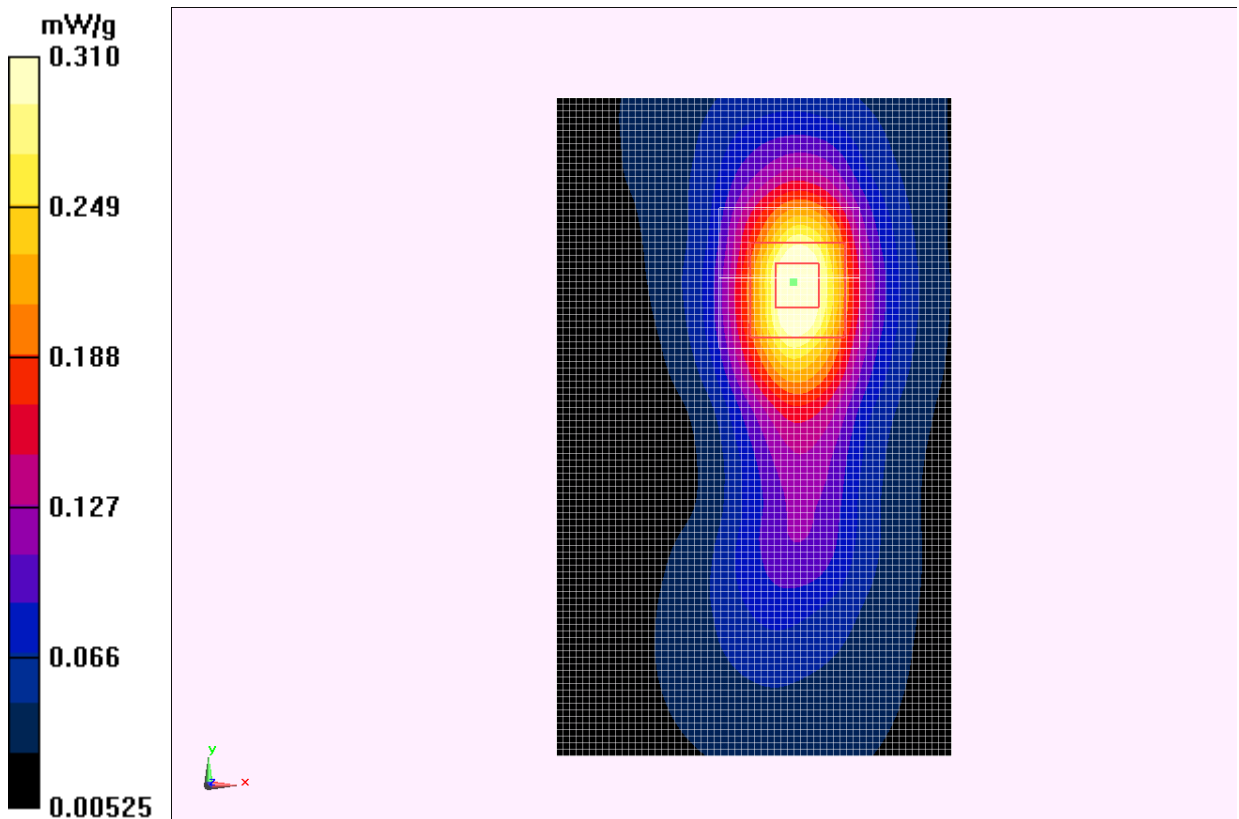


Fig. 40 1900 MHz CH810

### 1900 Body Bottom Side High

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.513$  mho/m;  $\epsilon_r = 52.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.665 mW/g

**Bottom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.290 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.983 mW/g

**SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.354 mW/g**

Maximum value of SAR (measured) = 0.656 mW/g

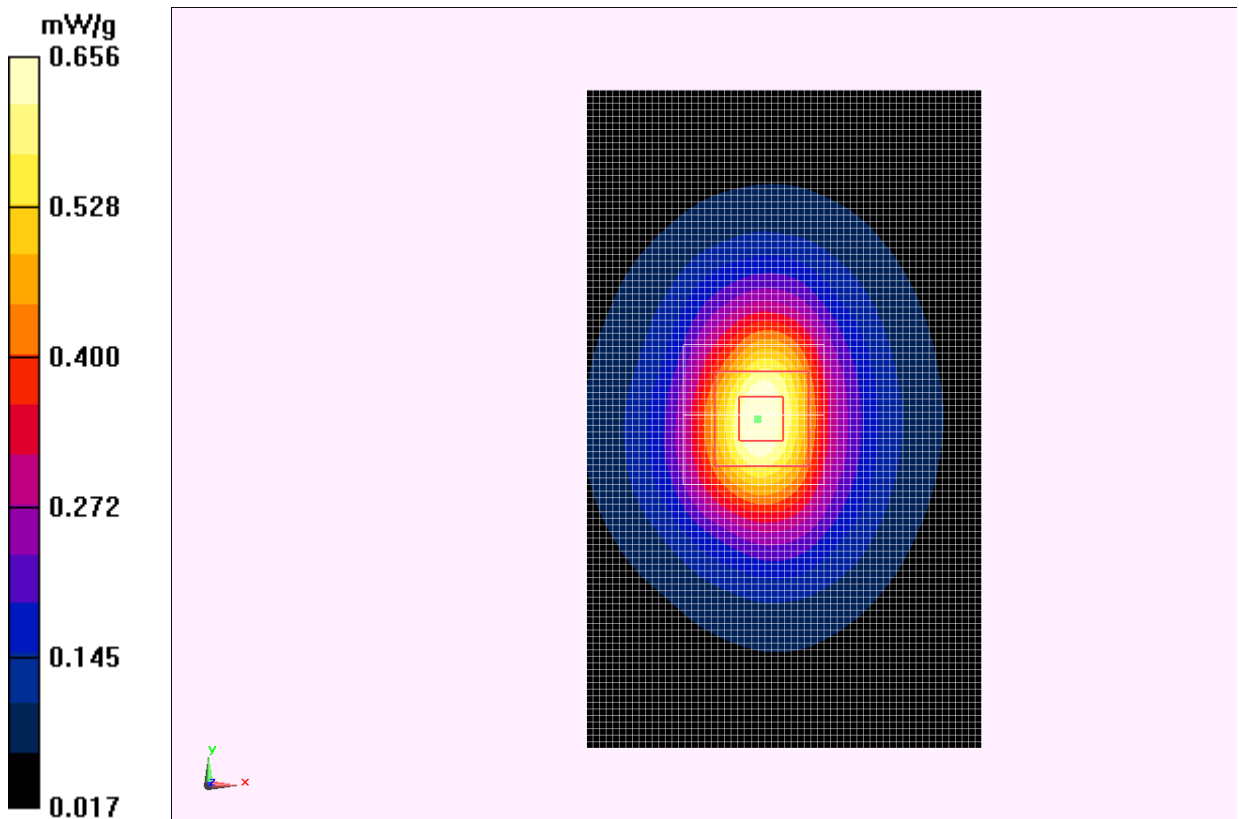


Fig. 41 1900 MHz CH810



**1900 Body Toward Ground Middle with EGPRS**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.483$  mho/m;  $\epsilon_r = 52.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Middle C1/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g


**Toward Ground Middle C1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.797 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.517 mW/g

**SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.548 mW/g**

Maximum value of SAR (measured) = 0.996 mW/g

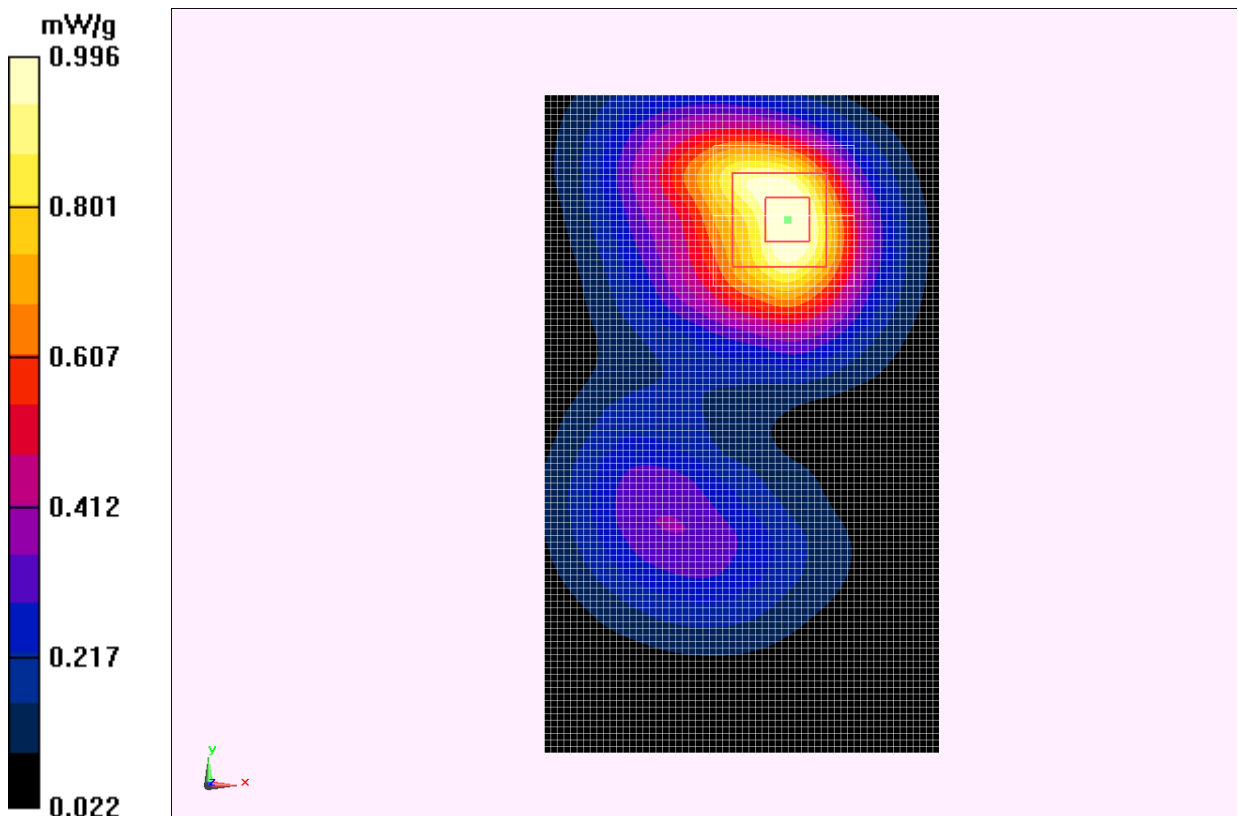

**Fig. 42 1900 MHz CH661**

**1900 Body Toward Ground Middle with Headset CCB3160A11C1**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.483$  mho/m;  $\epsilon_r = 52.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.625 mW/g


**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.984 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.900 mW/g

**SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.328 mW/g**

Maximum value of SAR (measured) = 0.580 mW/g

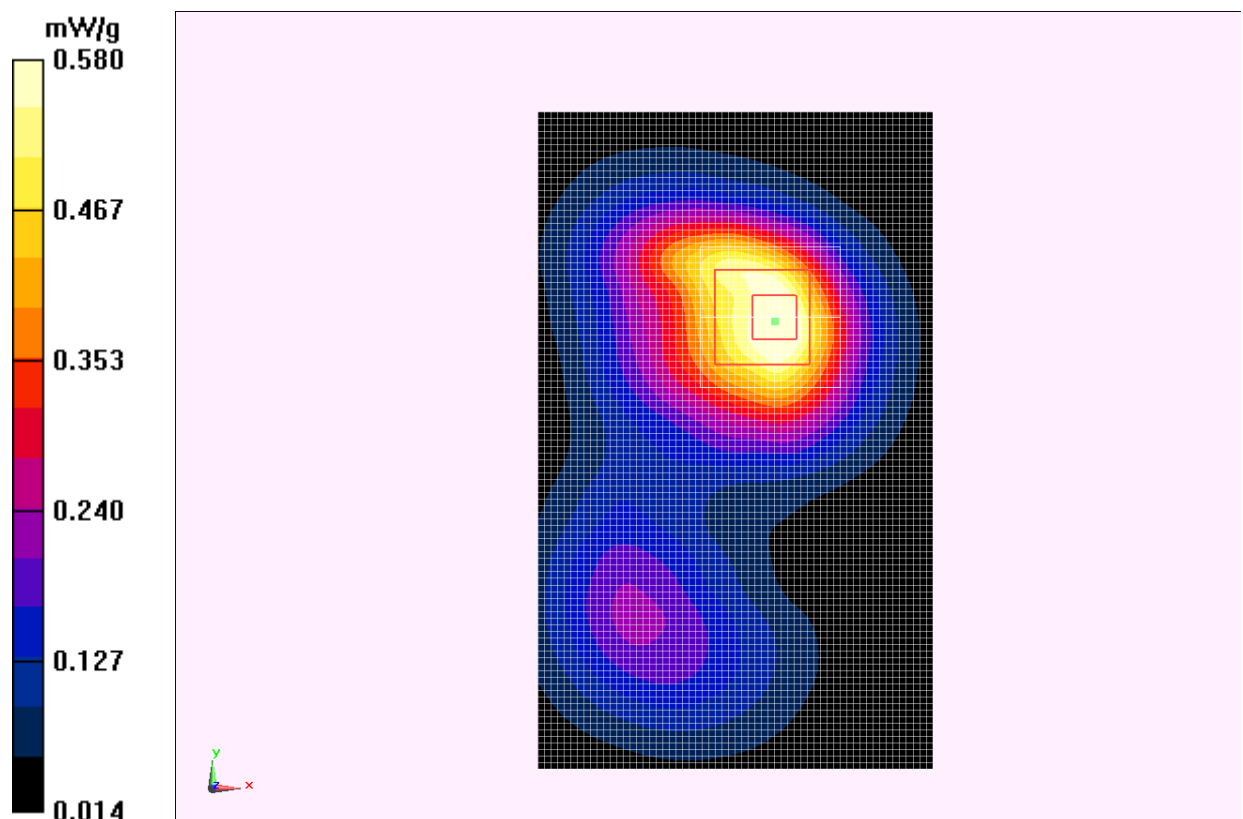

**Fig. 43 1900 MHz CH661**

**1900 Body Toward Ground Middle with Headset CCB3160A11C2**

Date: 2012-12-14

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.483$  mho/m;  $\epsilon_r = 52.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6°C      Liquid Temperature: 22.1°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.603 mW/g


**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.699 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.844 mW/g

**SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.303 mW/g**

Maximum value of SAR (measured) = 0.521 mW/g

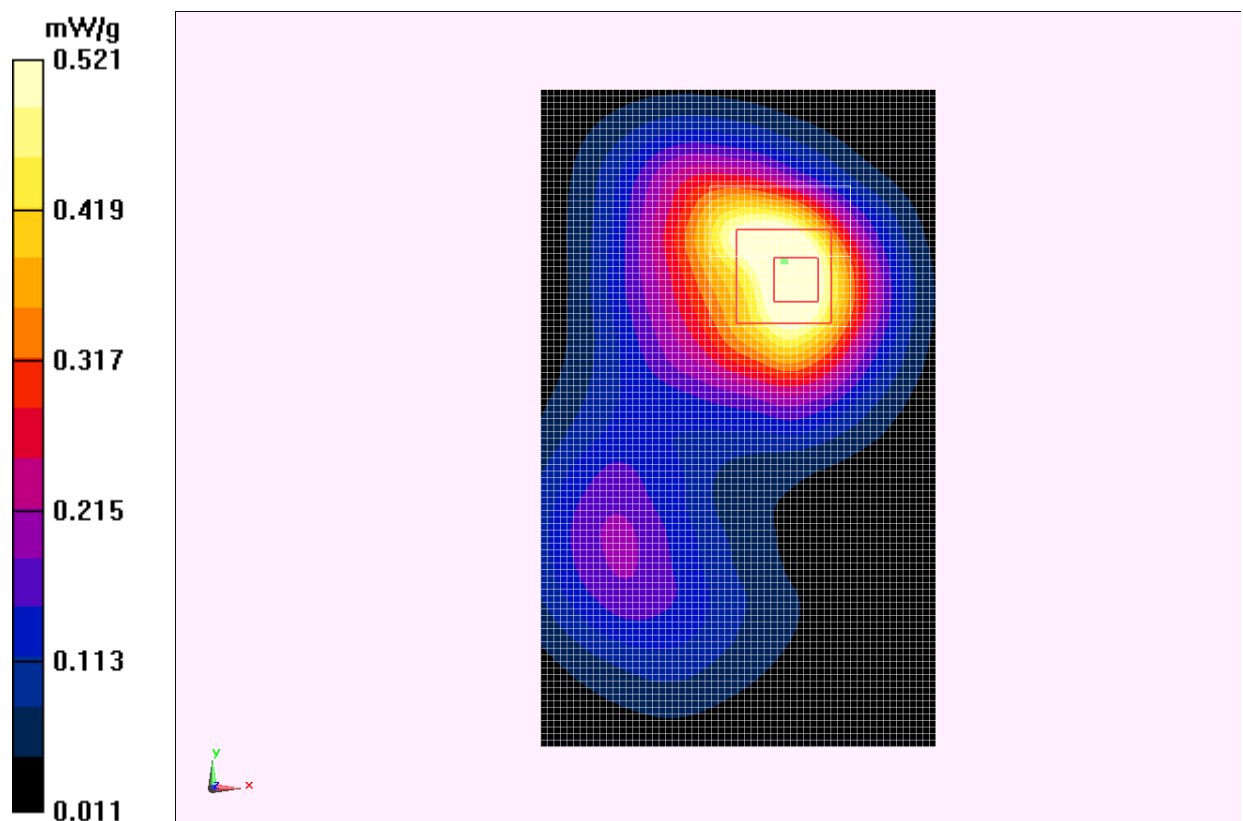

**Fig. 44 1900 MHz CH661**

### WCDMA 850 Left Cheek High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.903$  mho/m;  $\epsilon_r = 40.688$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.707 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.646 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.846 mW/g

**SAR(1 g) = 0.690 mW/g; SAR(10 g) = 0.525 mW/g**

Maximum value of SAR (measured) = 0.717 mW/g


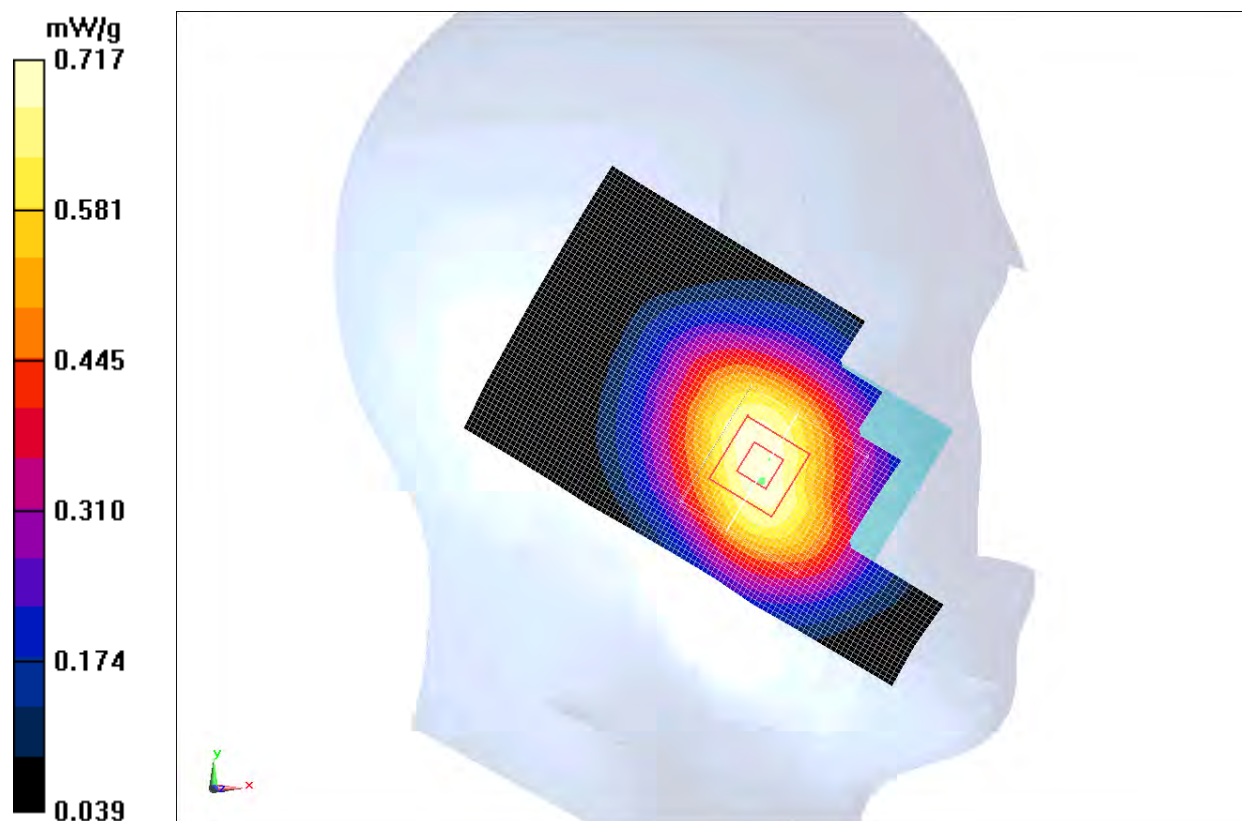


Fig. 45 WCDMA 850 CH4233

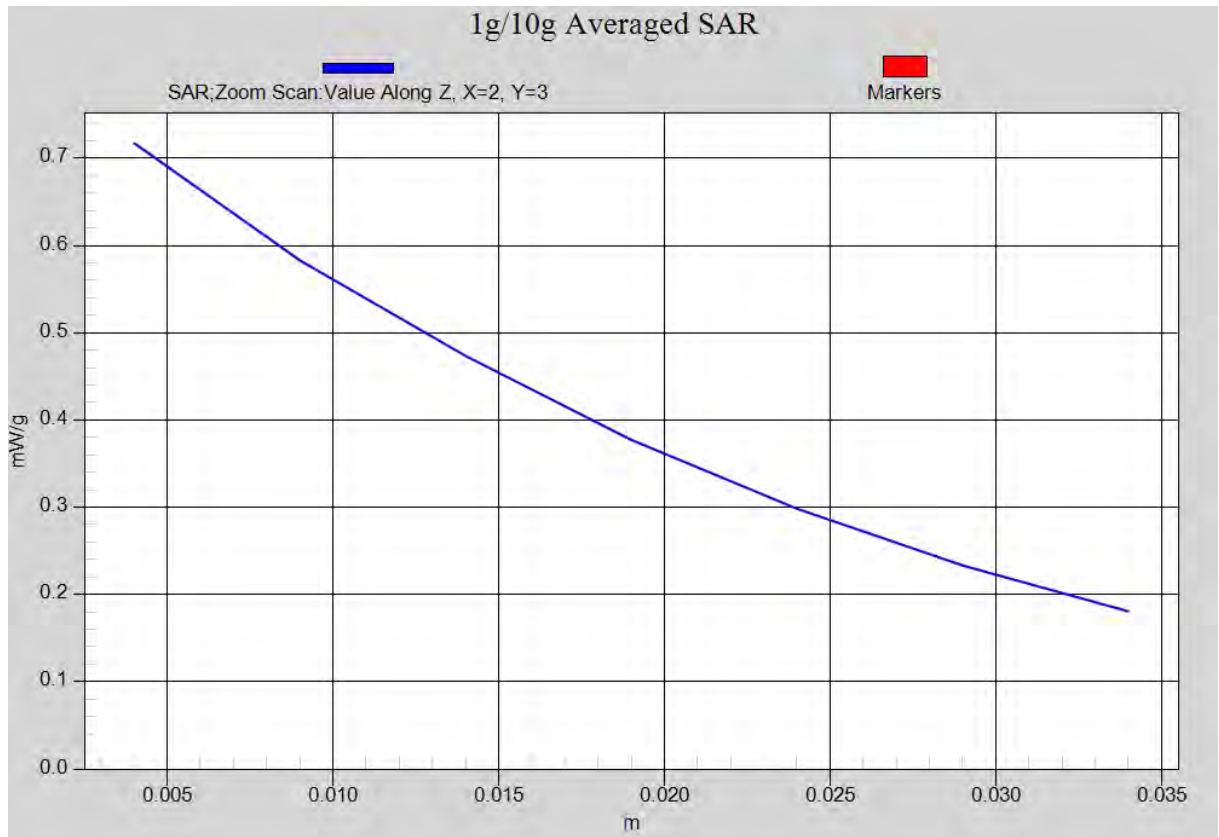

**Fig. 45-1 Z-Scan at power reference point (WCDMA 850 CH4233)**

**WCDMA 850 Left Cheek Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.600 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.971 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.716 mW/g

**SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.435 mW/g**

Maximum value of SAR (measured) = 0.603 mW/g

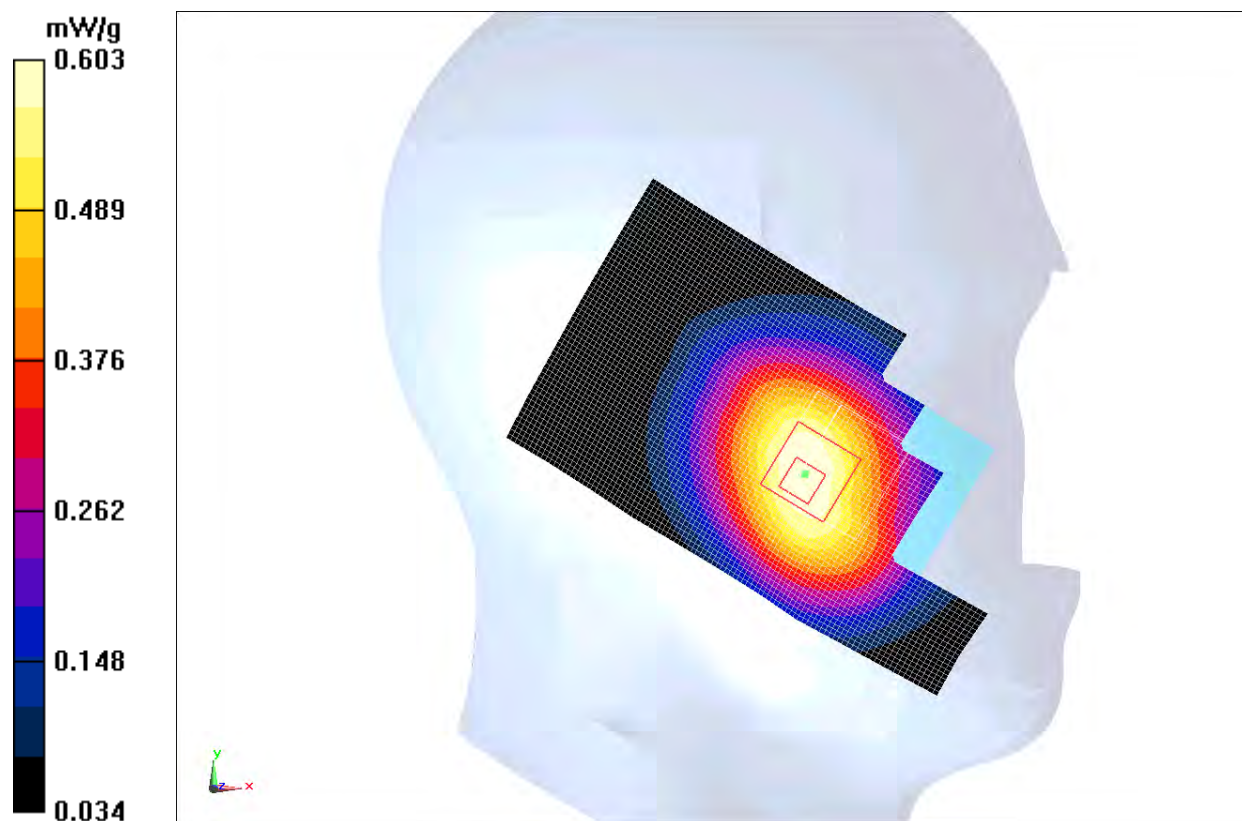


Fig. 46 WCDMA 850 CH4182



### WCDMA 850 Left Cheek Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.985$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.533 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.987 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.638 mW/g

**SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.388 mW/g**

Maximum value of SAR (measured) = 0.534 mW/g

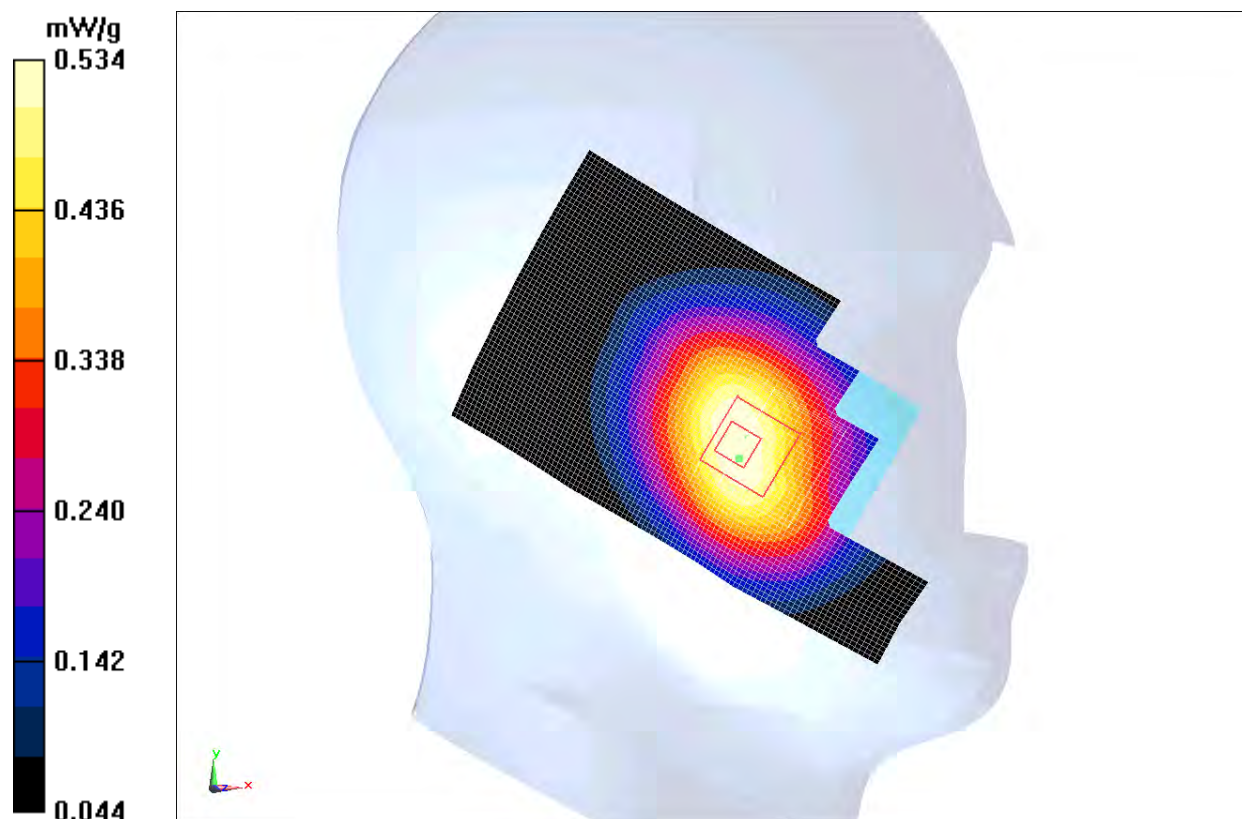


Fig. 47 WCDMA 850 CH4132

### WCDMA 850 Left Tilt High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.903$  mho/m;  $\epsilon_r = 40.688$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.369 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.530 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.439 mW/g

**SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.264 mW/g**

Maximum value of SAR (measured) = 0.370 mW/g

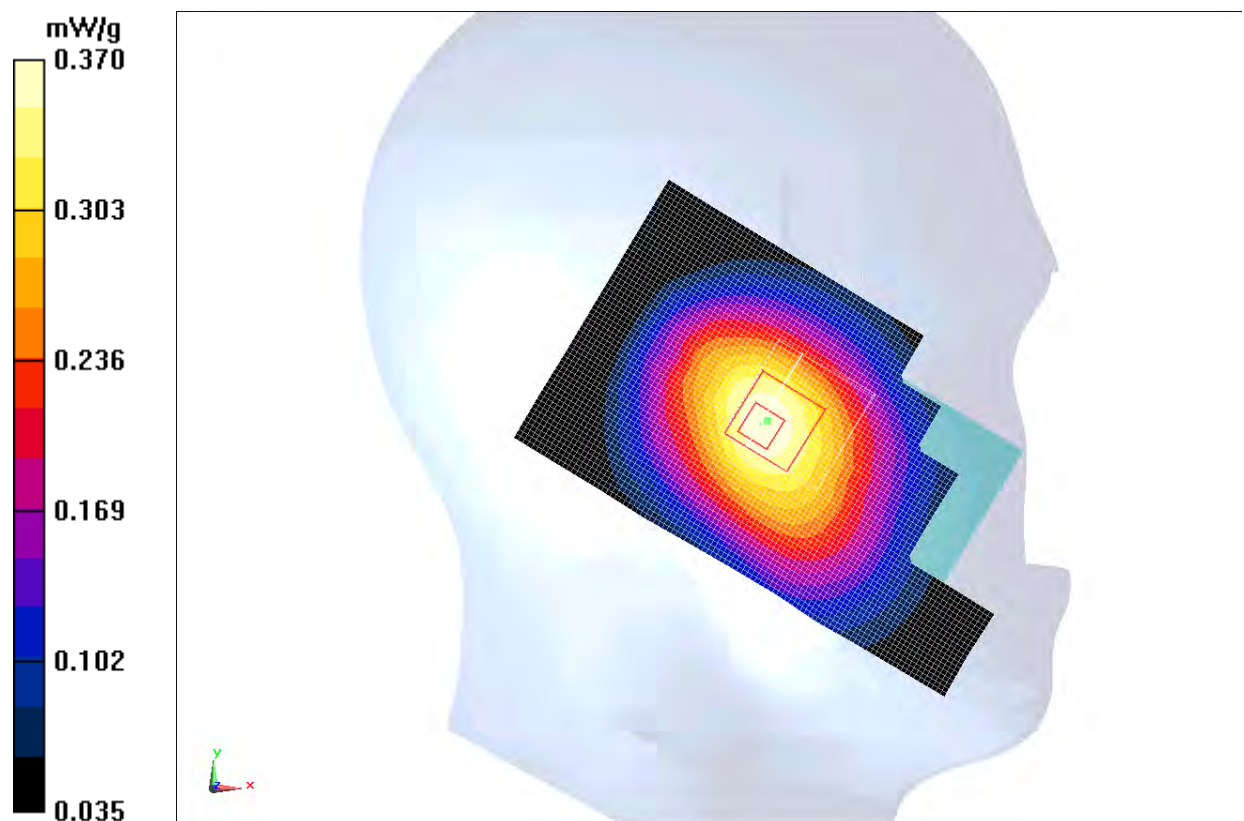


Fig. 48 WCDMA 850 CH4233

### WCDMA 850 Left Tilt Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.314 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.027 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.369 mW/g

**SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.225 mW/g**

Maximum value of SAR (measured) = 0.312 mW/g

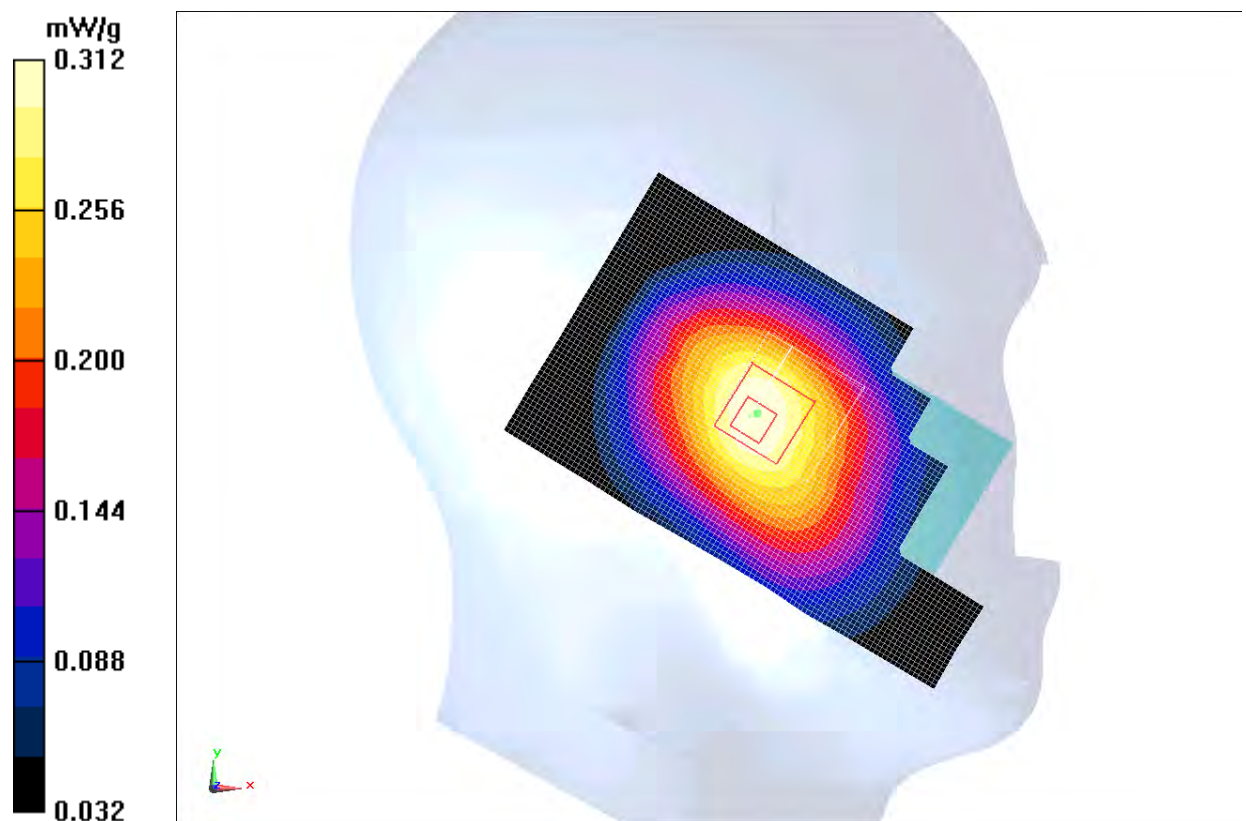


Fig. 49 WCDMA 850 CH4182

**WCDMA 850 Left Tilt Low**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.985$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.288 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.029 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.340 mW/g

**SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.287 mW/g

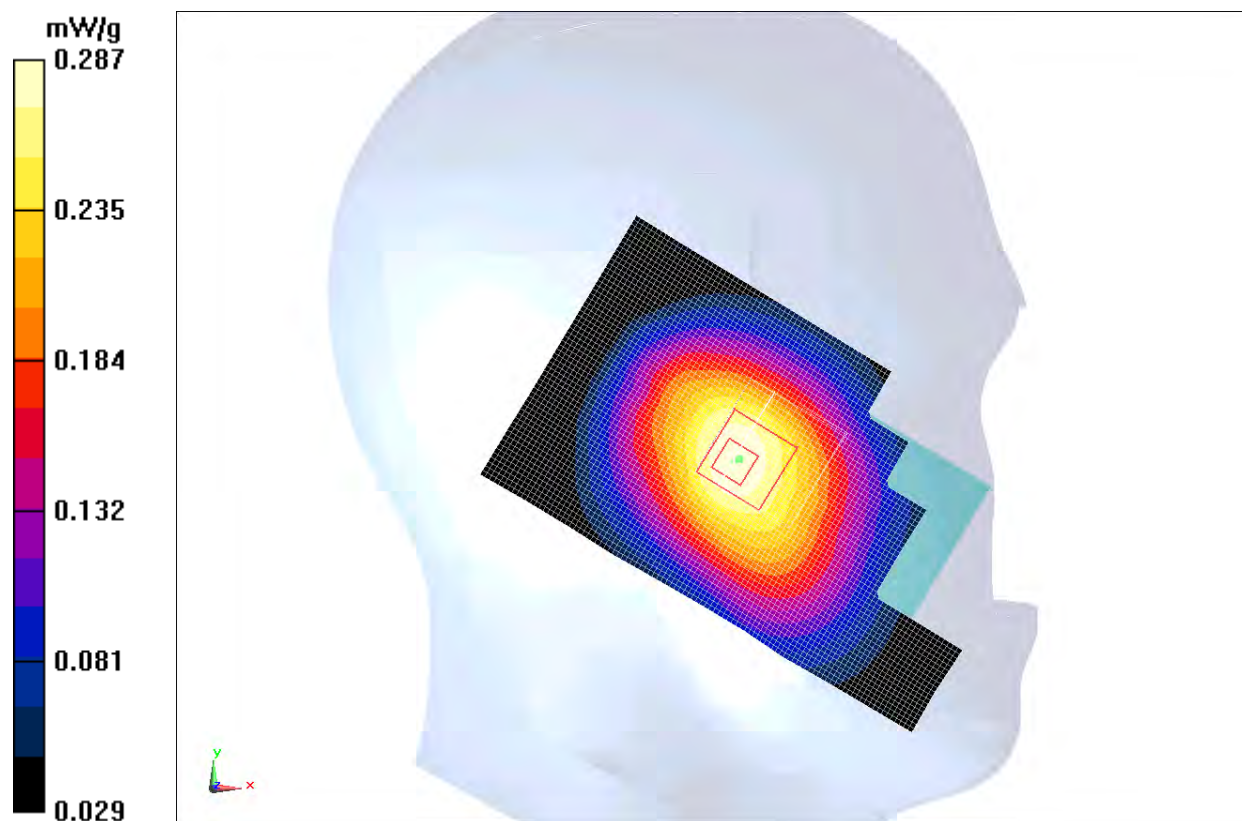


Fig. 50 WCDMA 850 CH4132



### WCDMA 850 Right Cheek High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.903$  mho/m;  $\epsilon_r = 40.688$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.536 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.305 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.608 mW/g

**SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.388 mW/g**

Maximum value of SAR (measured) = 0.533 mW/g

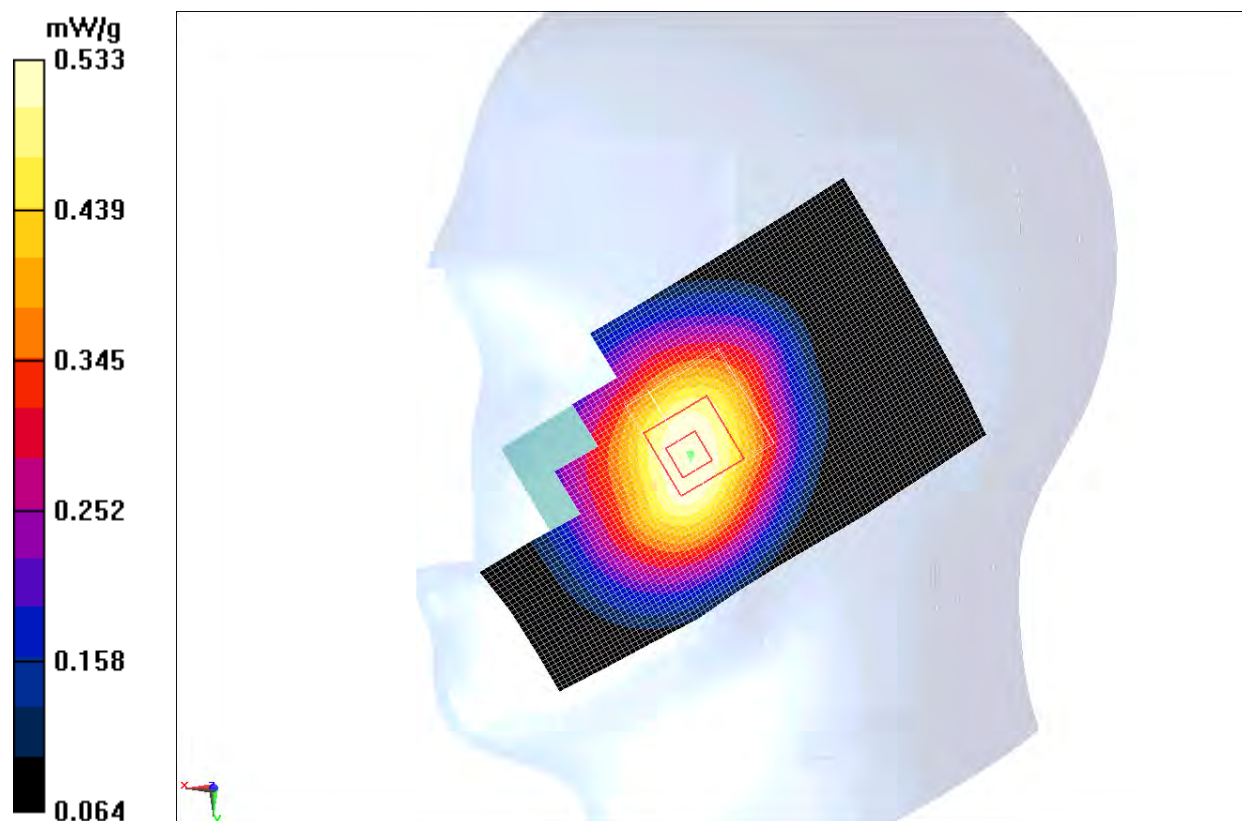


Fig. 51 WCDMA 850 CH4233

### WCDMA 850 Right Cheek Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.451 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.546 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.535 mW/g

**SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.330 mW/g**

Maximum value of SAR (measured) = 0.449 mW/g

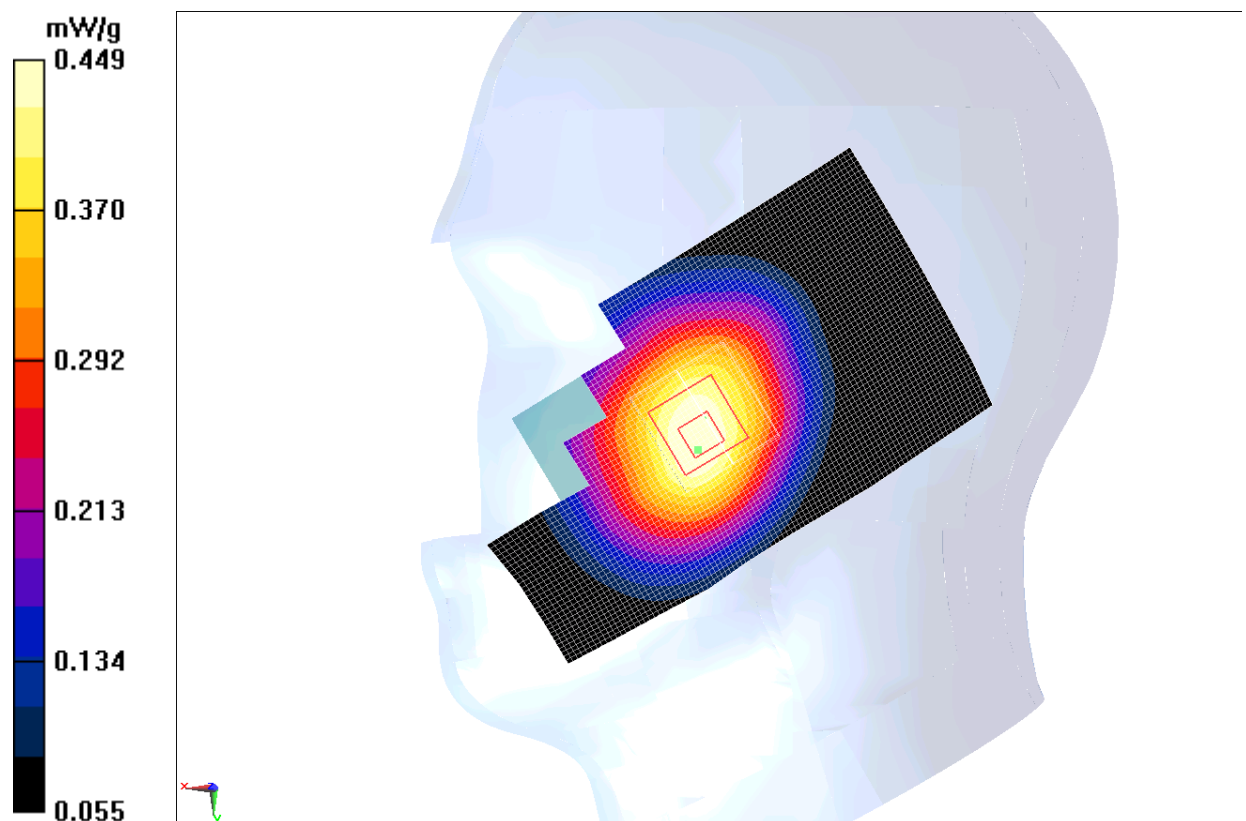


Fig. 52 WCDMA 850 CH4182



**WCDMA 850 Right Cheek Low**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.985$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.412 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.517 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.490 mW/g

**SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.301 mW/g**

Maximum value of SAR (measured) = 0.419 mW/g

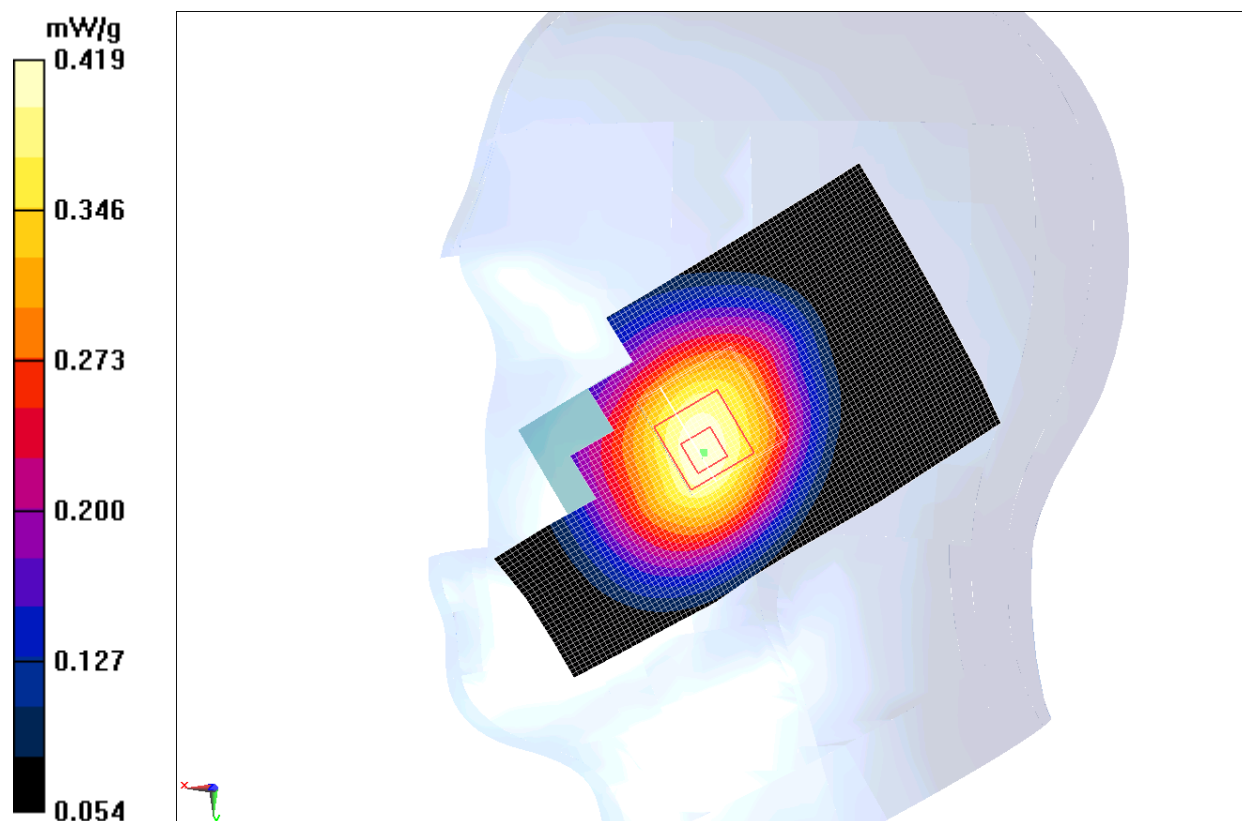


Fig. 53 WCDMA 850 CH4132

### WCDMA 850 Right Tilt High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.903$  mho/m;  $\epsilon_r = 40.688$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.349 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.117 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.410 mW/g

**SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.245 mW/g**

Maximum value of SAR (measured) = 0.340 mW/g

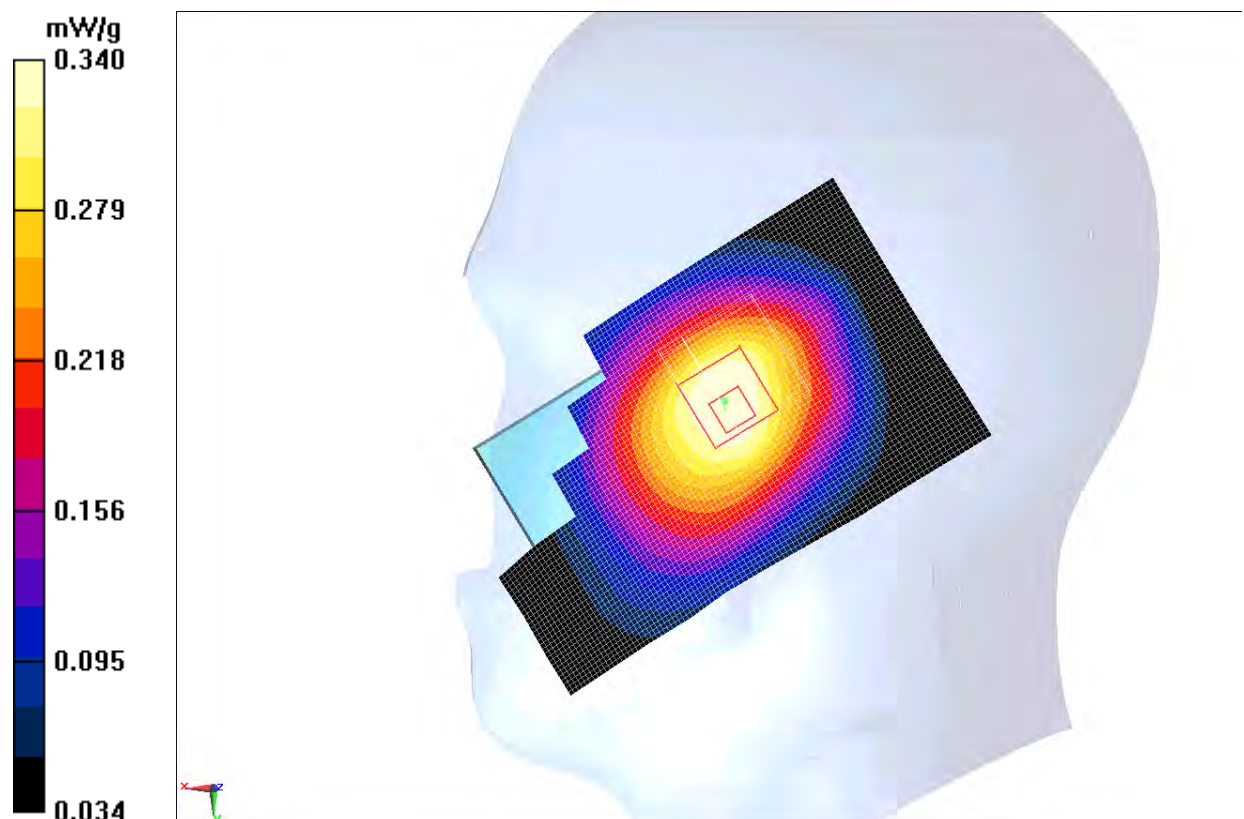


Fig. 54 WCDMA 850 CH4233

**WCDMA 850 Right Tilt Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.855$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.311 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.478 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.356 mW/g

**SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.221 mW/g**

Maximum value of SAR (measured) = 0.304 mW/g

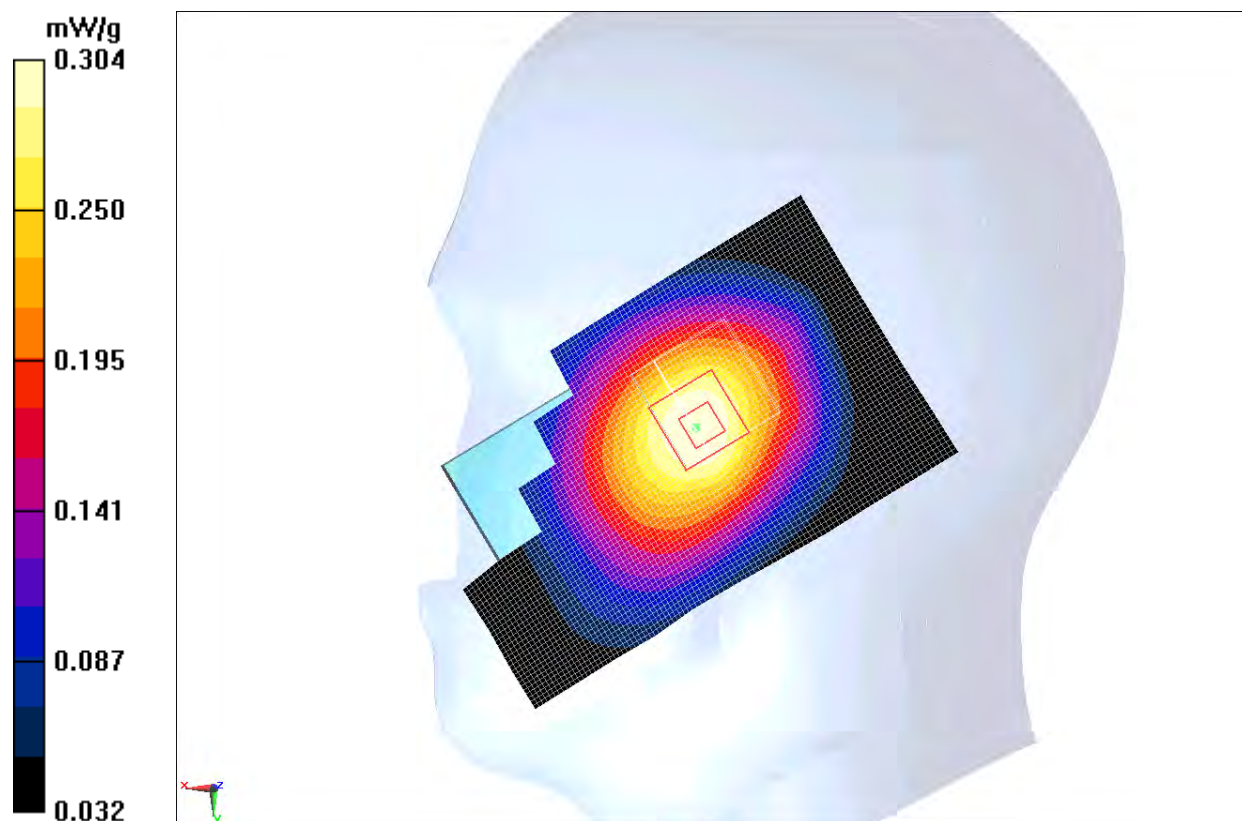


Fig. 55 WCDMA 850 CH4182

### WCDMA 850 Right Tilt Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.985$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.305 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.508 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.355 mW/g

**SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.217 mW/g**

Maximum value of SAR (measured) = 0.297 mW/g

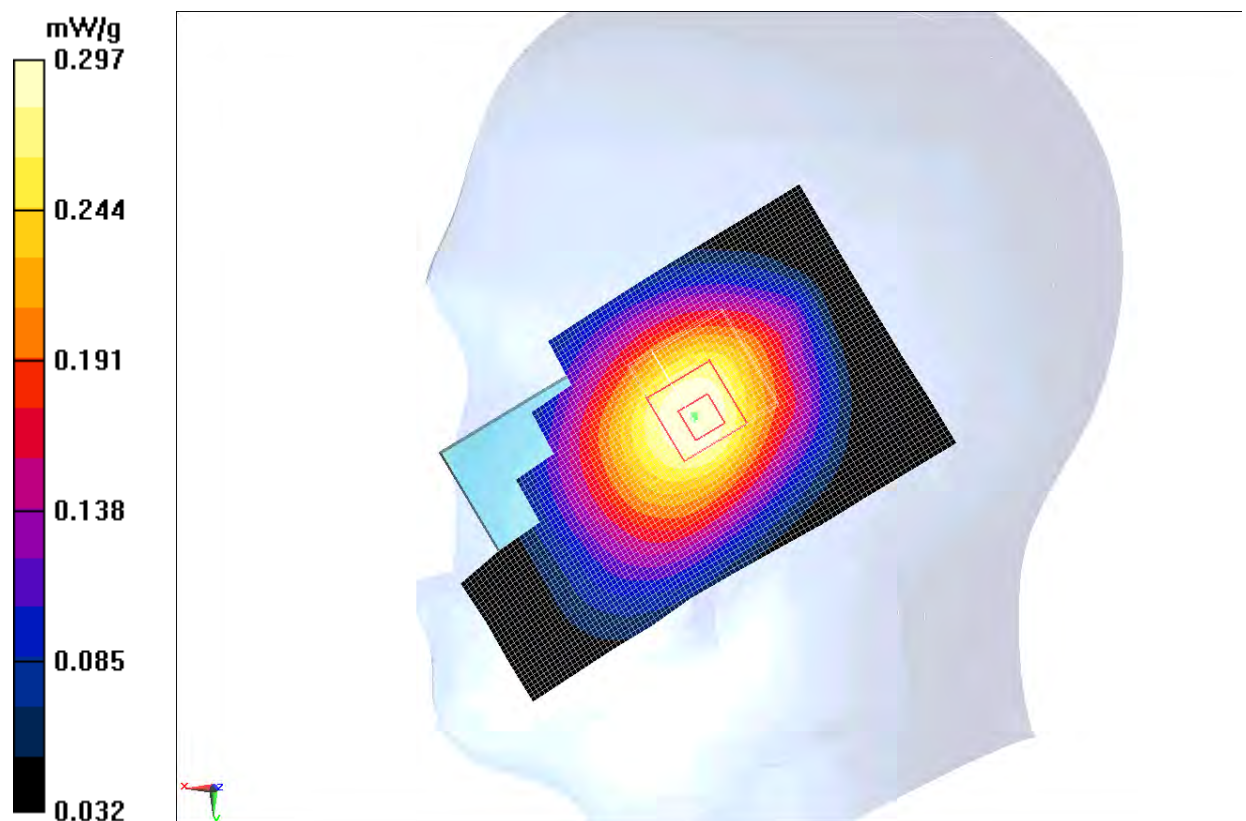


Fig. 56 WCDMA 850 CH4132

### WCDMA 850 Body Towards Phantom Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Phantom Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.725 mW/g

**Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.773 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.846 mW/g

**SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.533 mW/g**

Maximum value of SAR (measured) = 0.721 mW/g

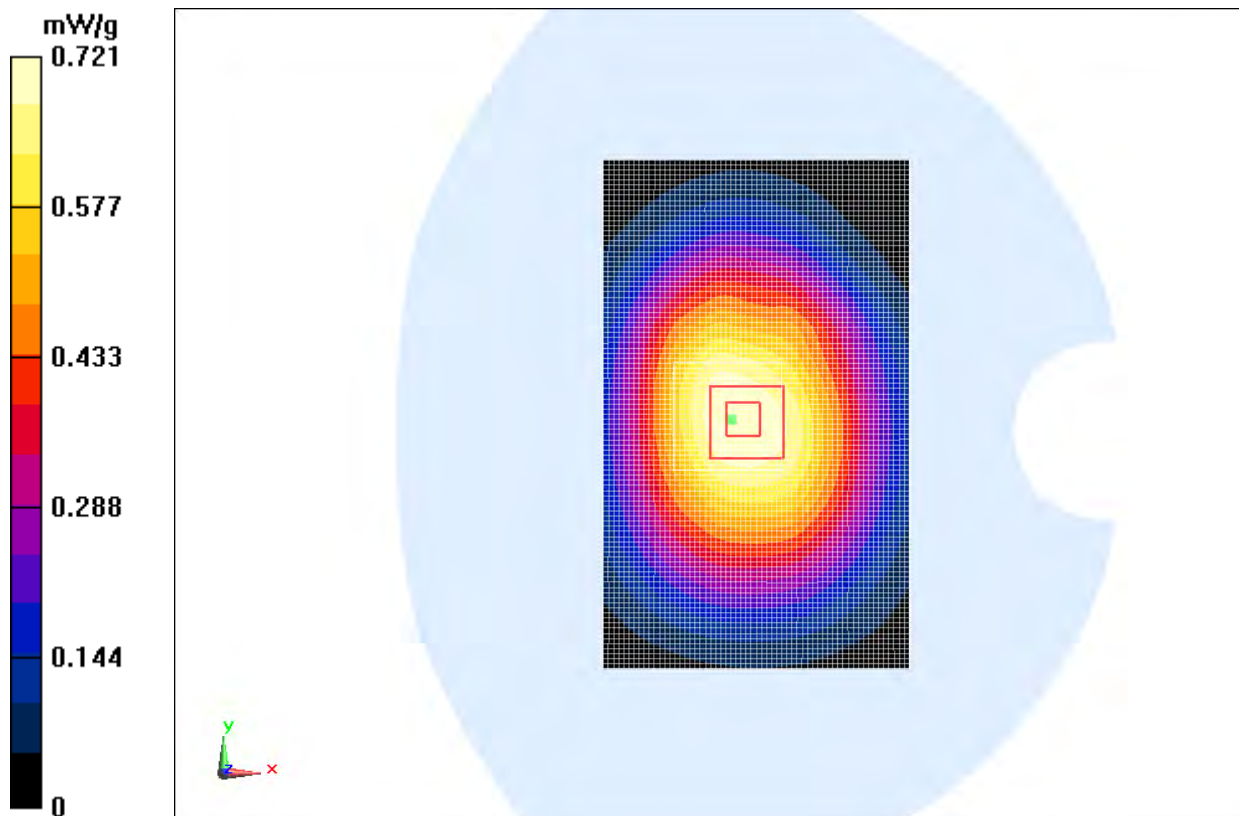


Fig. 57 WCDMA 850 CH4182



### WCDMA 850 Body Towards Ground High

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 1.005$  mho/m;  $\epsilon_r = 54.145$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.236 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.244 mW/g

**SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.722 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.236 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.399 mW/g

**SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.571 mW/g**

Maximum value of SAR (measured) = 0.965 mW/g

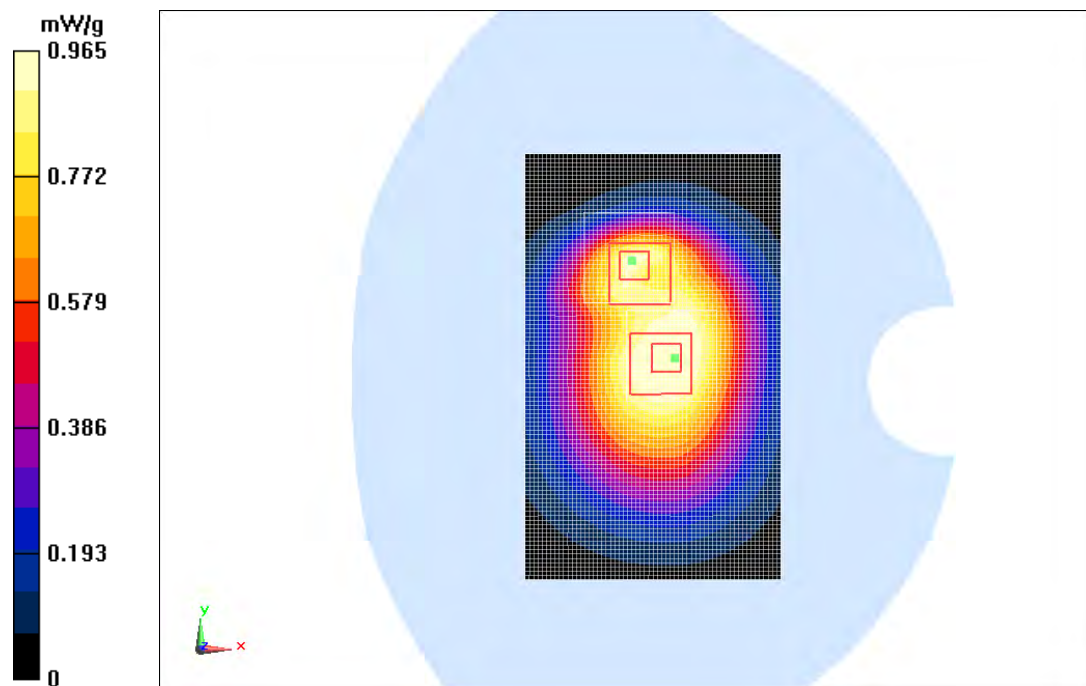


Fig. 58 WCDMA 850 CH4233



### WCDMA 850 Body Towards Ground Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.06 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.879 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.288 mW/g

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.748 mW/g**

Maximum value of SAR (measured) = 1.07 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.879 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.431 mW/g

**SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.594 mW/g**

Maximum value of SAR (measured) = 0.986 mW/g


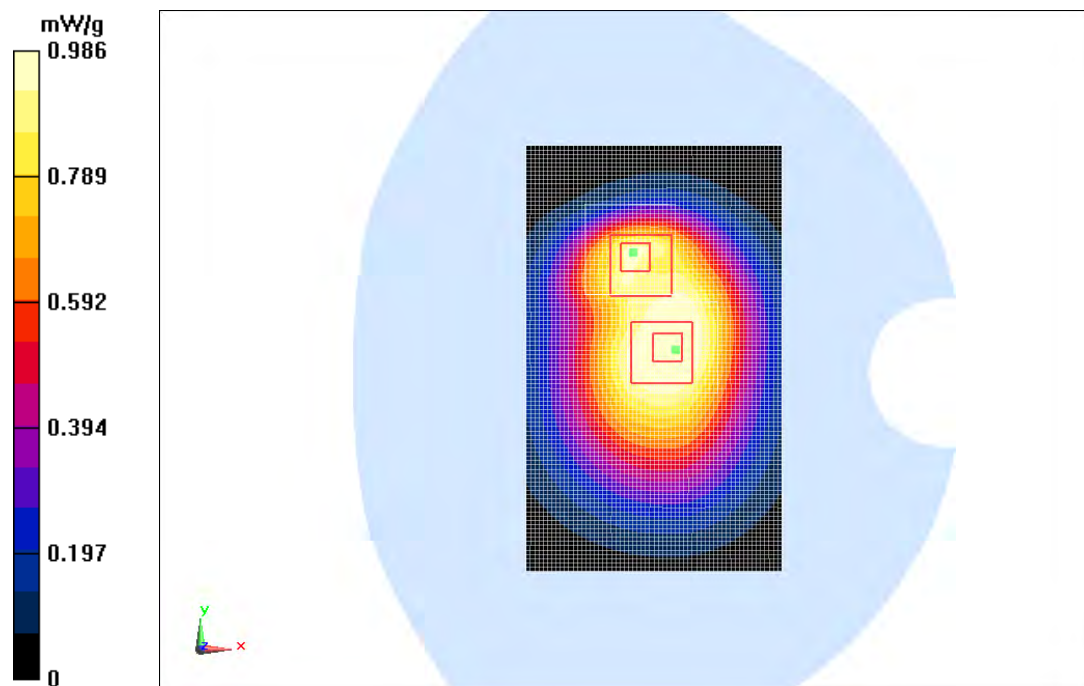


Fig. 59 WCDMA 850 CH4182

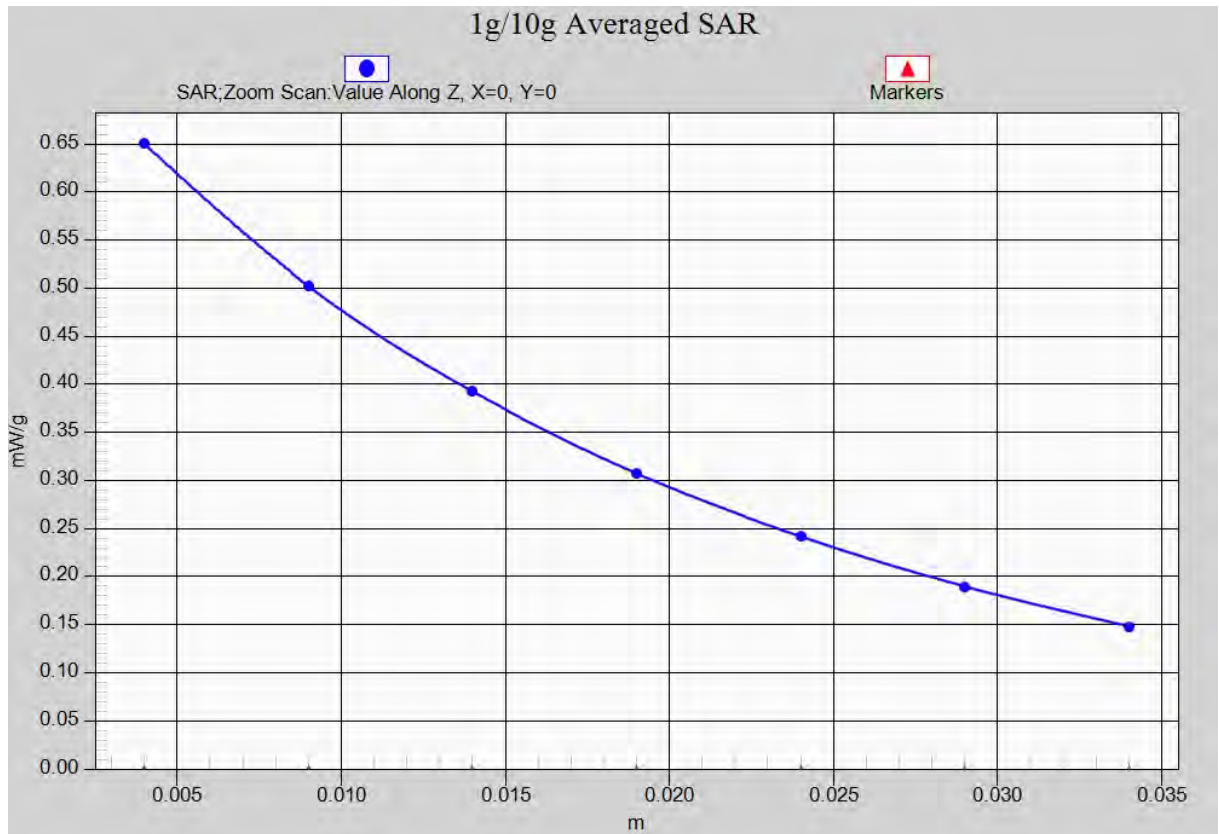

**Fig. 59-1 Z-Scan at power reference point (WCDMA850 CH4182)**

### WCDMA 850 Body Towards Ground Low

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r = 54.348$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g

**Toward Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.495 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.260 mW/g

**SAR(1 g) = 0.990 mW/g; SAR(10 g) = 0.733 mW/g**

Maximum value of SAR (measured) = 1.05 mW/g

**Toward Ground Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.495 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.404 mW/g

**SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.596 mW/g**

Maximum value of SAR (measured) = 0.989 mW/g

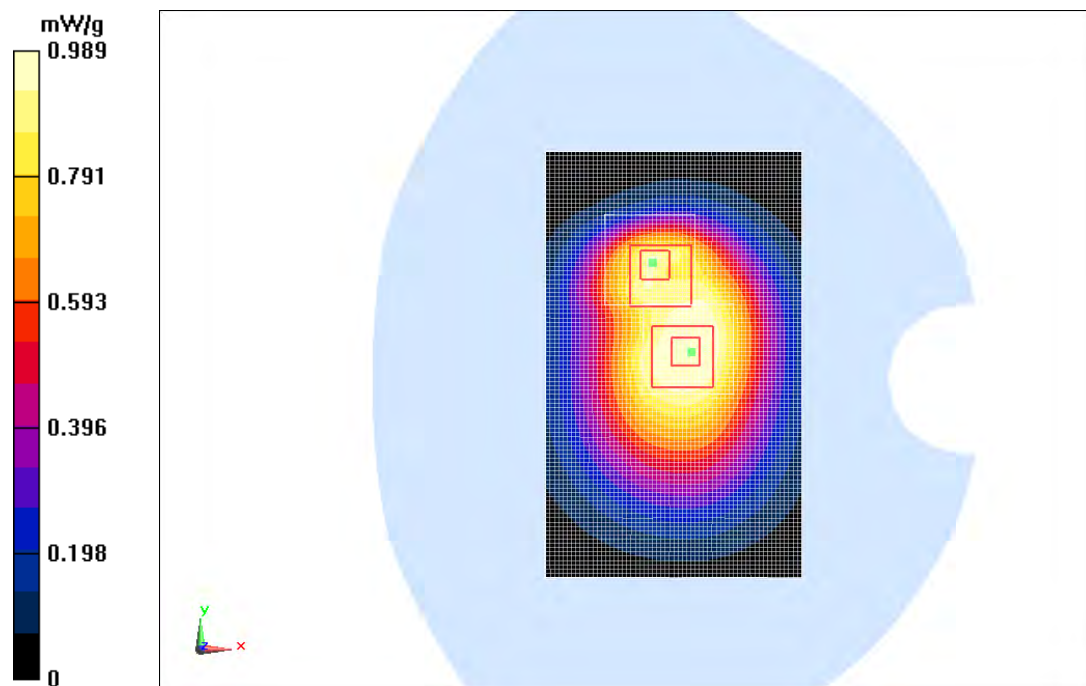


Fig. 60 WCDMA 850 CH4132

### WCDMA 850 Body Left Side Middle

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Left Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.815 mW/g

**Left Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.156 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.038 mW/g

**SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.538 mW/g**

Maximum value of SAR (measured) = 0.810 mW/g

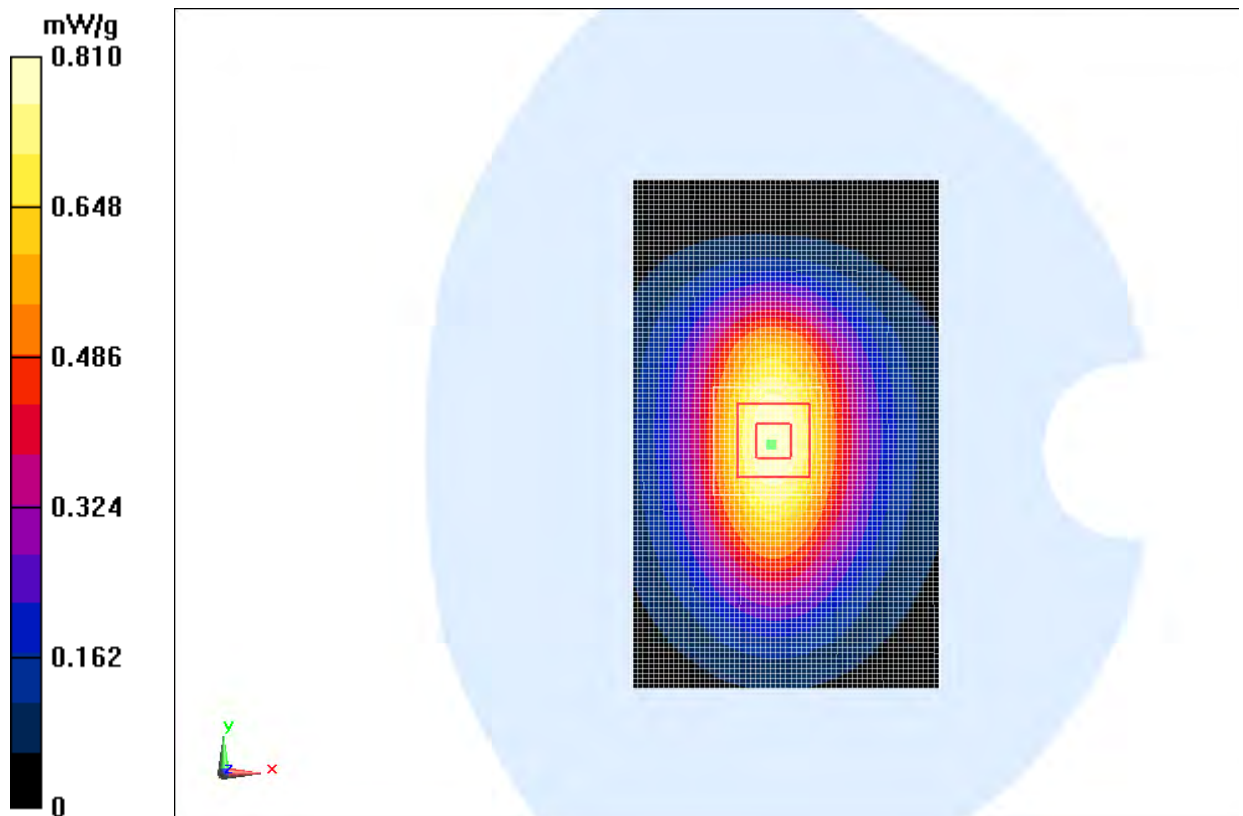


Fig. 61 WCDMA 850 CH4182

**WCDMA 850 Body Right Side Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Right Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.717 mW/g


**Right Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.561 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.921 mW/g

**SAR(1 g) = 0.669 mW/g; SAR(10 g) = 0.463 mW/g**

Maximum value of SAR (measured) = 0.713 mW/g

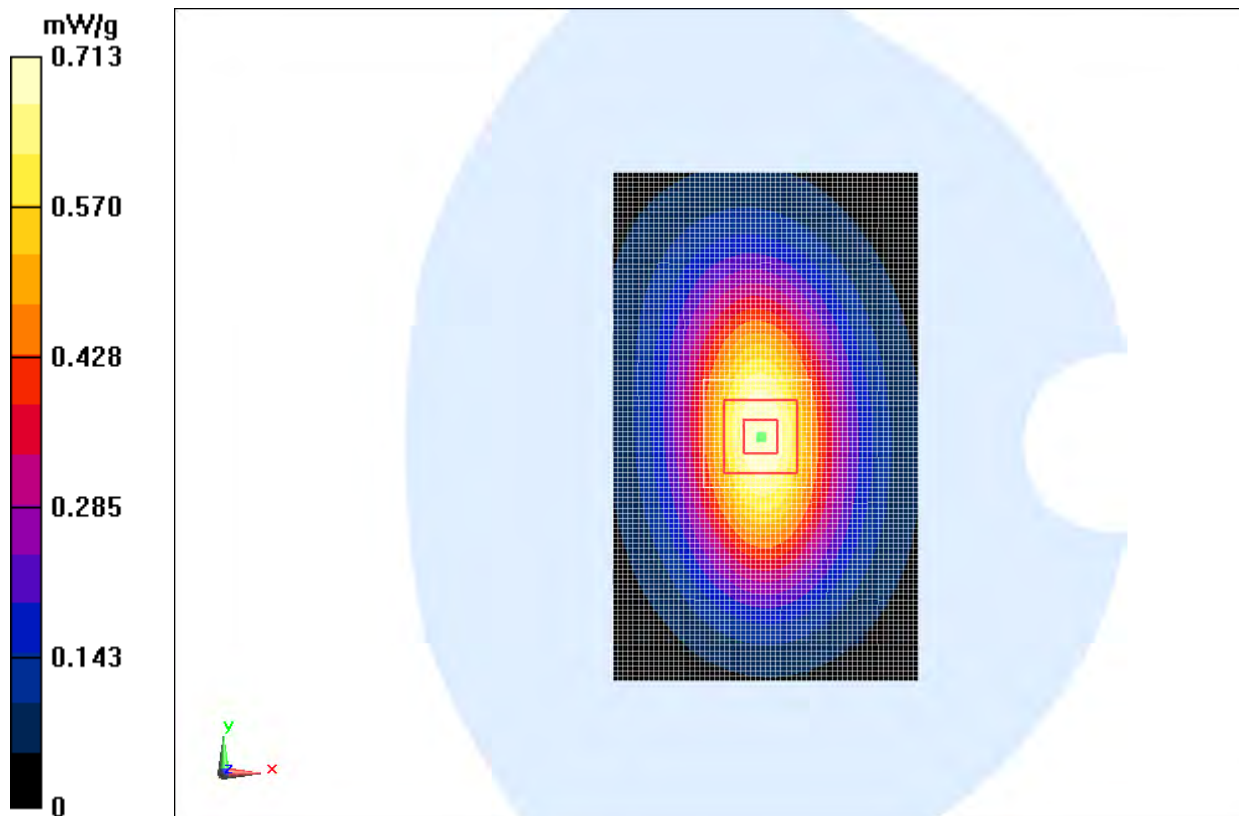

**Fig. 62 WCDMA 850 CH4182**



**WCDMA 850 Body Bottom Side Middle**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Bottom Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.183 mW/g


**Bottom Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.533 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.262 mW/g

**SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.098 mW/g**

Maximum value of SAR (measured) = 0.179 mW/g

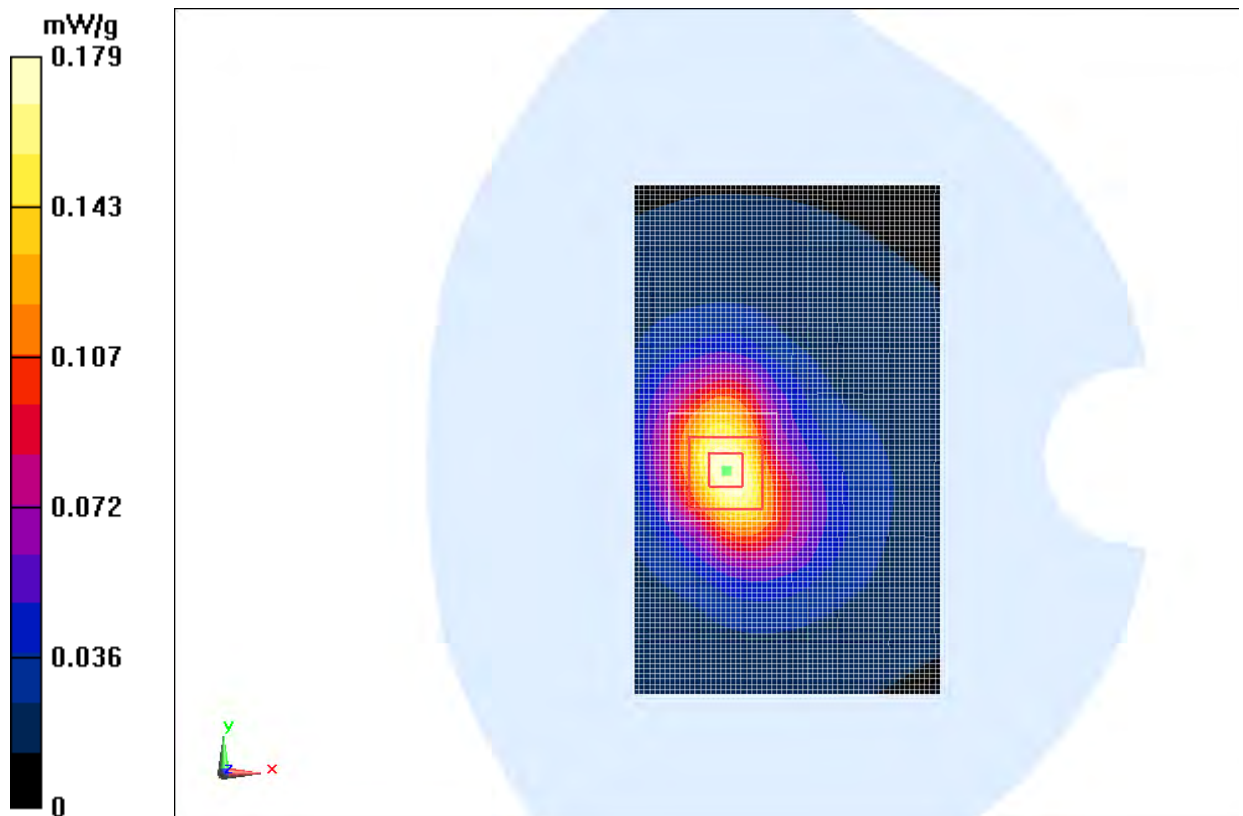

**Fig. 63 WCDMA 850 CH4182**



**WCDMA 850 Body Towards Ground High with Headset CCB3160A11C1**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 1.005$  mho/m;  $\epsilon_r = 54.145$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.818 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.179 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.983 mW/g

**SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.576 mW/g**

Maximum value of SAR (measured) = 0.815 mW/g


**Toward Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.179 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.248 mW/g

**SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.477 mW/g**

Maximum value of SAR (measured) = 0.845 mW/g

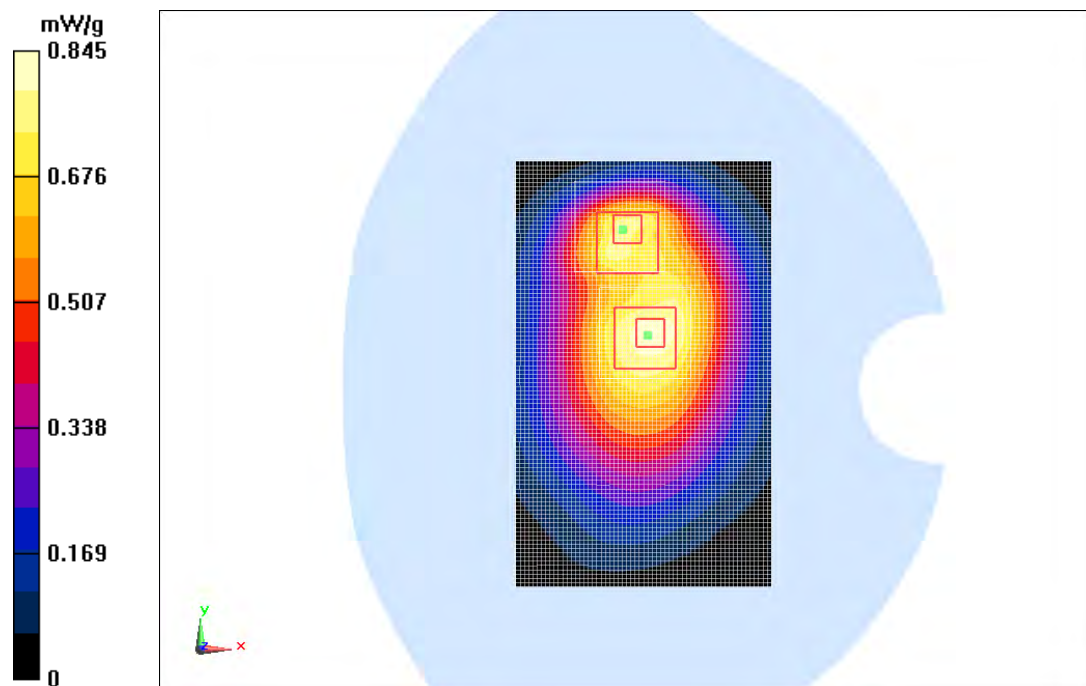

**Fig. 64 WCDMA 850 CH4233**

**WCDMA 850 Body Towards Ground Middle with Headset CCB3160A11C1**

Date: 2012-12-13

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C      Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.894 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.650 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.072 mW/g

**SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.633 mW/g**

Maximum value of SAR (measured) = 0.892 mW/g


**Toward Ground High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.650 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.307 mW/g

**SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.521 mW/g**

Maximum value of SAR (measured) = 0.838 mW/g

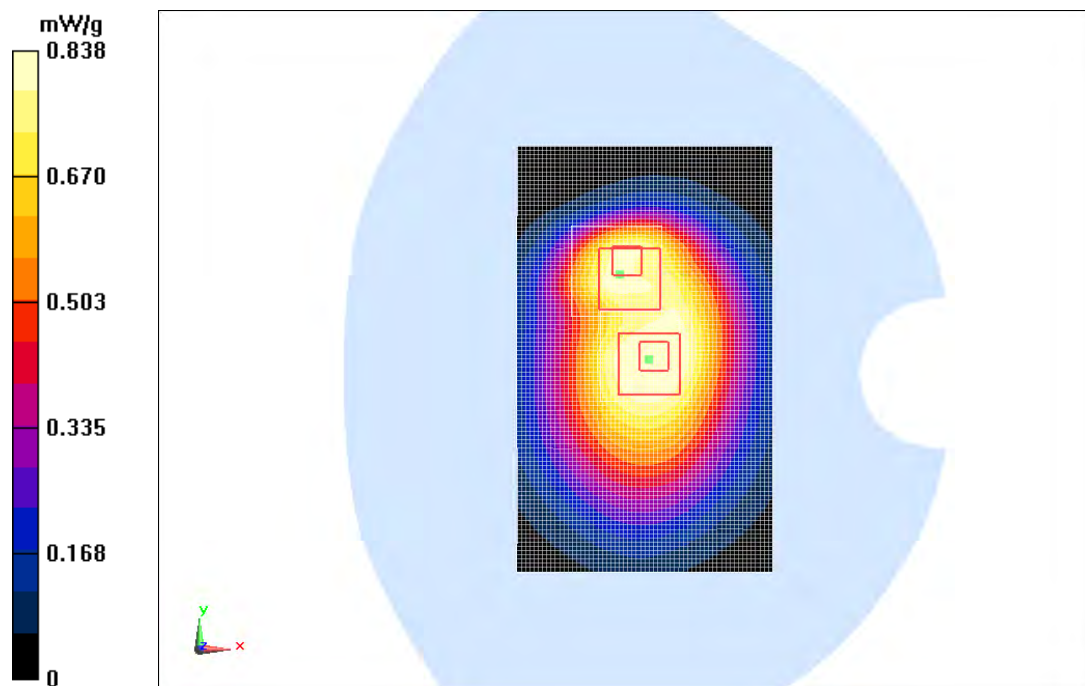

**Fig. 65 WCDMA 850 CH4182**