



# SAR TEST REPORT

No. 2013SAR00003

For

**TCT Mobile Limited**

**HSDPA/HSUPA/UMTS triband / GSM quad bands mobile phone**

**Model name: Beetle Lite US**

**Marketing name: ONE TOUCH 4010A**

With

**Hardware Version: Proto**

**Software Version: vCA2**

**FCC ID: RAD317**

**Issued Date: 2013-02-18**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. [www.emcite.com](http://www.emcite.com)

**Revision Version**

<b>Report Number</b>	<b>Revision</b>	<b>Date</b>	<b>Memo</b>
2013SAR00003	00	2013-02-06	Initial creation of test report
2013SAR00003	01	2013-02-18	1. Update the section 4.1 2. Modify the power tolerance and reported SAR for WiFi

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>5</b>
1.1 TESTING LOCATION .....	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA .....	5
1.4 SIGNATURE.....	5
<b>2 STATEMENT OF COMPLIANCE .....</b>	<b>6</b>
<b>3 CLIENT INFORMATION .....</b>	<b>7</b>
3.1 APPLICANT INFORMATION .....	7
3.2 MANUFACTURER INFORMATION .....	7
<b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
4.1 ABOUT EUT.....	8
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	8
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	8
<b>5 TEST METHODOLOGY .....</b>	<b>9</b>
5.1 APPLICABLE LIMIT REGULATIONS .....	9
5.2 APPLICABLE MEASUREMENT STANDARDS.....	9
<b>6 SPECIFIC ABSORPTION RATE (SAR).....</b>	<b>10</b>
6.1 INTRODUCTION.....	10
6.2 SAR DEFINITION.....	10
<b>7 TISSUE SIMULATING LIQUIDS .....</b>	<b>11</b>
7.1 TARGETS FOR TISSUE SIMULATING LIQUID .....	11
7.2 DIELECTRIC PERFORMANCE .....	11
<b>8 SYSTEM VERIFICATION .....</b>	<b>15</b>
8.1 SYSTEM SETUP.....	15
8.2 SYSTEM VERIFICATION.....	16
<b>9 MEASUREMENT PROCEDURES .....</b>	<b>17</b>
9.1 TESTS TO BE PERFORMED .....	17
9.2 GENERAL MEASUREMENT PROCEDURE.....	18
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR .....	19
9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR .....	20
9.5 POWER DRIFT.....	20
<b>10 AREA SCAN BASED 1-G SAR.....</b>	<b>21</b>
10.1 REQUIREMENT OF KDB.....	21
10.2 FAST SAR ALGORITHMS .....	21
<b>11 CONDUCTED OUTPUT POWER.....</b>	<b>22</b>
11.1 MANUFACTURING TOLERANCE .....	22
11.2 GSM MEASUREMENT RESULT .....	23
11.3 WCDMA MEASUREMENT RESULT.....	25
11.4 WI-FI AND BT MEASUREMENT RESULT .....	25

<b>12 SIMULTANEOUS TX SAR CONSIDERATIONS .....</b>	<b>27</b>
12.1 INTRODUCTION.....	27
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES.....	27
12.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....	27
<b>13 EVALUATION OF SIMULTANEOUS.....</b>	<b>28</b>
<b>14 SAR TEST RESULT .....</b>	<b>29</b>
14.1 THE EVALUATION OF MULTI-BATTERIES .....	29
14.2 SAR TEST RESULT .....	29
<b>15 SAR MEASUREMENT VARIABILITY.....</b>	<b>37</b>
<b>16 MEASUREMENT UNCERTAINTY .....</b>	<b>38</b>
<b>16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS .....</b>	<b>38</b>
<b>16.2 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS.....</b>	<b>39</b>
<b>17 MAIN TEST INSTRUMENTS.....</b>	<b>40</b>
<b>ANNEX A GRAPH RESULTS.....</b>	<b>41</b>
<b>ANNEX B SYSTEM VERIFICATION RESULTS .....</b>	<b>153</b>
<b>ANNEX C SAR MEASUREMENT SETUP .....</b>	<b>160</b>
C.1 MEASUREMENT SET-UP .....	160
C.2 DASY4 OR DASY5 E-FIELD PROBE SYSTEM .....	161
C.3 E-FIELD PROBE CALIBRATION .....	161
C.4 OTHER TEST EQUIPMENT.....	162
C.4.1 DATA ACQUISITION ELECTRONICS(DAE) .....	162
C.4.2 ROBOT.....	163
C.4.3 MEASUREMENT SERVER.....	163
C.4.4 DEVICE HOLDER FOR PHANTOM.....	164
C.4.5 PHANTOM.....	164
<b>ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .....</b>	<b>166</b>
D.1 GENERAL CONSIDERATIONS.....	166
D.2 BODY-WORN DEVICE .....	167
D.3 DESKTOP DEVICE.....	167
D.4 DUT SETUP PHOTOS.....	168
<b>ANNEX E EQUIVALENT MEDIA RECIPES .....</b>	<b>169</b>
<b>ANNEX F SYSTEM VALIDATION .....</b>	<b>170</b>
<b>ANNEX G PROBE CALIBRATION CERTIFICATE.....</b>	<b>171</b>
<b>ANNEX H DIPOLE CALIBRATION CERTIFICATE .....</b>	<b>182</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China  
Postal Code: 100191  
Telephone: +86-10-62304633  
Fax: +86-10-62304793

### 1.2 Testing Environment

Temperature: 18°C~25 °C,  
Relative humidity: 30%~ 70%  
Ground system resistance: < 0.5  $\Omega$   
Ambient noise & Reflection: < 0.012 W/kg

### 1.3 Project Data


Project Leader: Qi Dianyuan  
Test Engineer: Lin Xiaojun  
Testing Start Date: January 17, 2013  
Testing End Date: January 21, 2013

### 1.4 Signature




---

Lin Xiaojun  
(Prepared this test report)

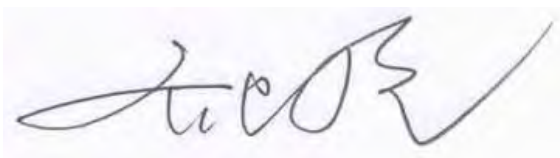

---

Qi Dianyuan  
(Reviewed this test report)



---

Xiao Li  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCT Mobile Limited HSDPA/HSUPA/UMTS triband / GSM quad bands mobile phone Beetle Lite US / ONE TOUCH 4010A are as follows:

**Table 2.1: Max. Reported SAR (1g)**

Band	Position	Reported SAR 1g (W/Kg)
GSM 850	Head	0.67
	Body	1.06
GSM 1900	Head	0.81
	Body	1.03
WCDMA 850	Head	0.79
	Body	1.27
WCDMA 1900	Head	1.41
	Body	1.35
WiFi	Head	0.13
	Body	0.12

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The maximum reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.41 W/kg (1g)**.

**Table 2.2: The sum of reported SAR values**

	Position	GSM/WCDMA	WiFi	Sum
<b>Maximum reported value for Head</b>	Left hand, Touch cheek	0.79	0.13	<b>0.92</b>
	Right hand, Touch cheek	1.41	0.07	<b>1.48</b>
<b>Maximum reported SAR value for Body</b>	Toward Ground	1.27	0.12	<b>1.39</b>
	Bottom Side	1.35	/	/

According to the above table, the maximum sum of reported SAR values for GSM and WiFi is **1.48 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

### 3 Client Information

#### 3.1 Applicant Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: ShangHai  
Postal Code: 201203  
Country: P.R.China  
Contact: Gong Zhizhou  
Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

#### 3.2 Manufacturer Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: ShangHai  
Postal Code: 201203  
Country: P.R.China  
Contact: Gong Zhizhou  
Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Description:	HSDPA/HSUPA/UMTS triband / GSM quad bands mobile phone
Model name:	Beetle Lite US
Marketing name:	ONE TOUCH 4010A
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1900/2100, BT, WiFi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	2412 – 2462 MHz (Wi-Fi)
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	B
WCDMA UE Category:	6
Release Version:	GSM: R99
	GPRS: Rel6
	UMTS: R6
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	11.5cm × 6.2 cm

### 4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	013461000100684 / 013461000100544	Proto	vCA2

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT (013461000100684) and conducted power with the EUT (013461000100544).

### 4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLi014A1	/	BYD
AE2	Battery	TLiB50B	/	BAK
AE3	Headset	CCB3160A11C2	/	Lianyun
AE4	Headset	CCB3160A11C4	/	Meihao
AE5	Headset	CCB3160A15C2	/	Lianyun
AE6	Headset	CCB3160A15C4	/	Meihao

\*AE ID: is used to identify the test sample in the lab internally.

**Note:** AE3 and AE5 are the same, so they can use the same results. AE4 and AE6 are the same, so they can use the same results.



## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**KDB447498 D01: General RF Exposure Guidance v05:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01:** SAR Evaluation Considerations for Wireless Handsets.

**865664 D01 SAR measurement 100 MHz to 6 GHz v01:** SAR Measurement Requirements for 100 MHz to 6 GHz

**865664 D02 SAR Reporting v01:** RF Exposure Compliance Reporting and Documentation Considerations

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid


**Table 7.1: Targets for tissue simulating liquid**

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3


### 7.2 Dielectric Performance

**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**


Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity $\epsilon$	Drift (%)	Conductivity $\sigma$ (S/m)	Drift (%)
2013-01-18	Head	835 MHz	40.83	-1.61	0.882	-2.00
	Body	835 MHz	55.58	0.69	0.984	1.44
2013-01-20	Head	1900 MHz	39.37	-1.58	1.408	0.57
	Body	1900 MHz	52.25	-1.97	1.511	-0.59
2013-01-17	Head	2450 MHz	38.69	-1.30	1.84	2.22
	Body	2450 MHz	52.03	-1.27	1.964	0.72

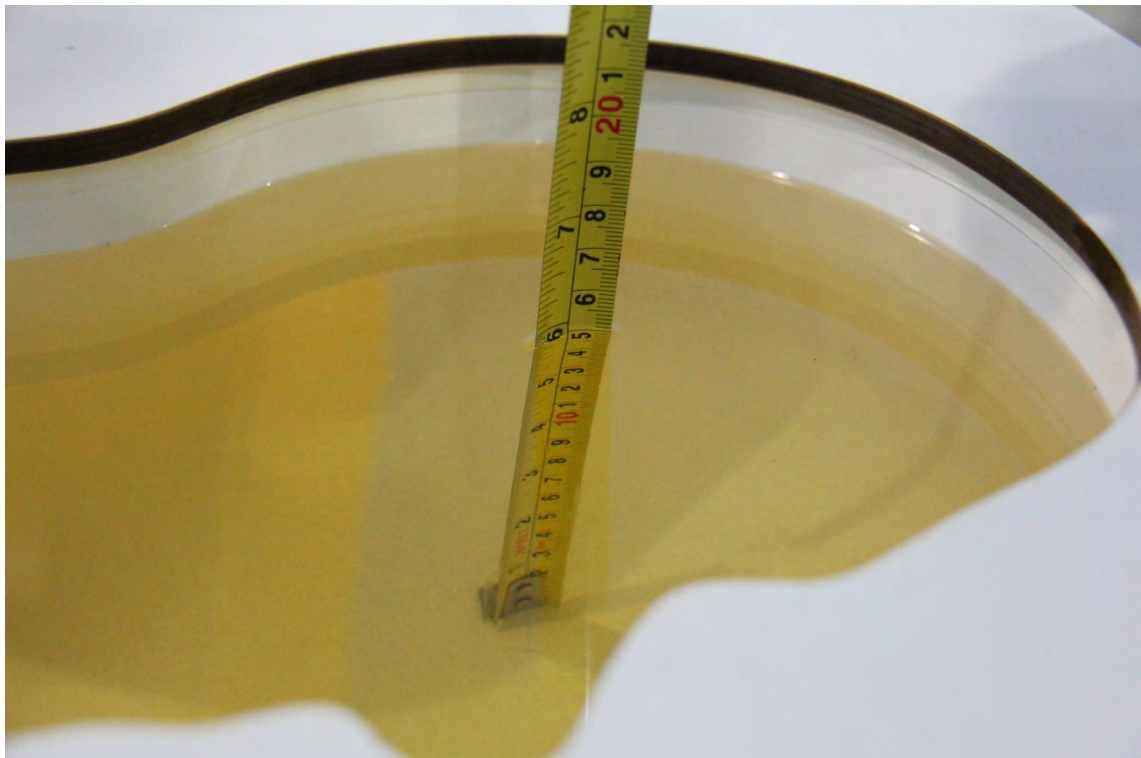


**Picture 7-1: Liquid depth in the Head Phantom (835 MHz)**

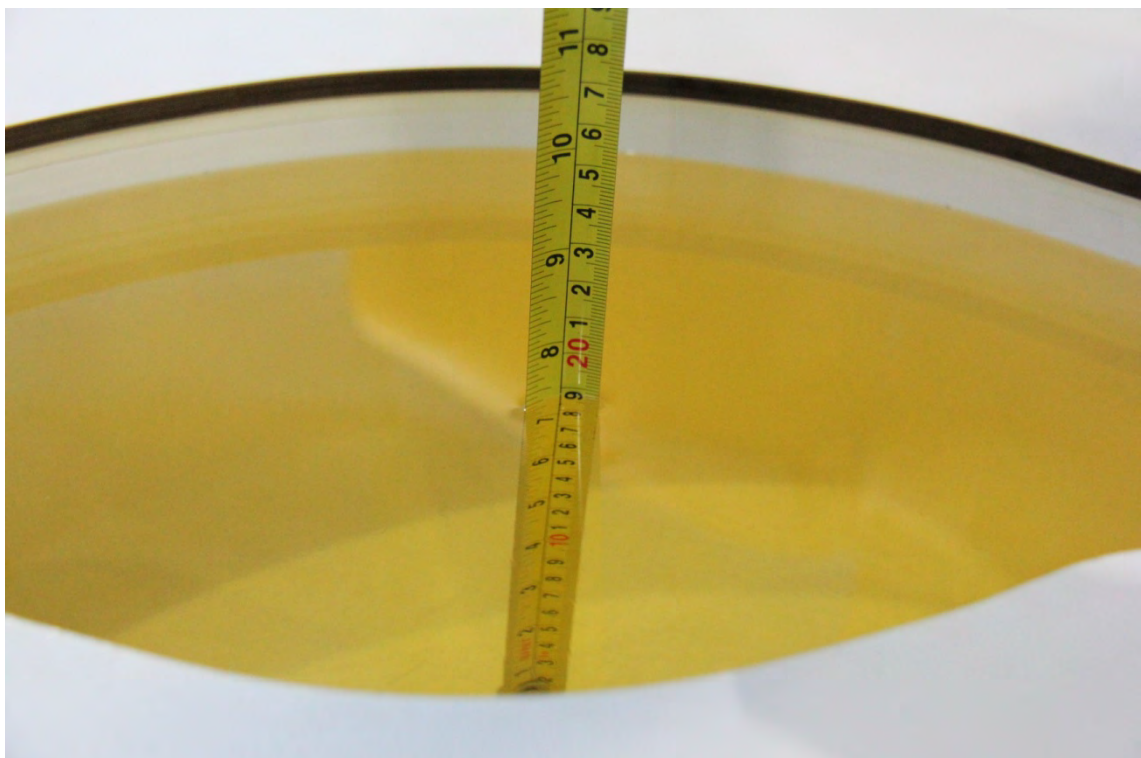


**Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)**

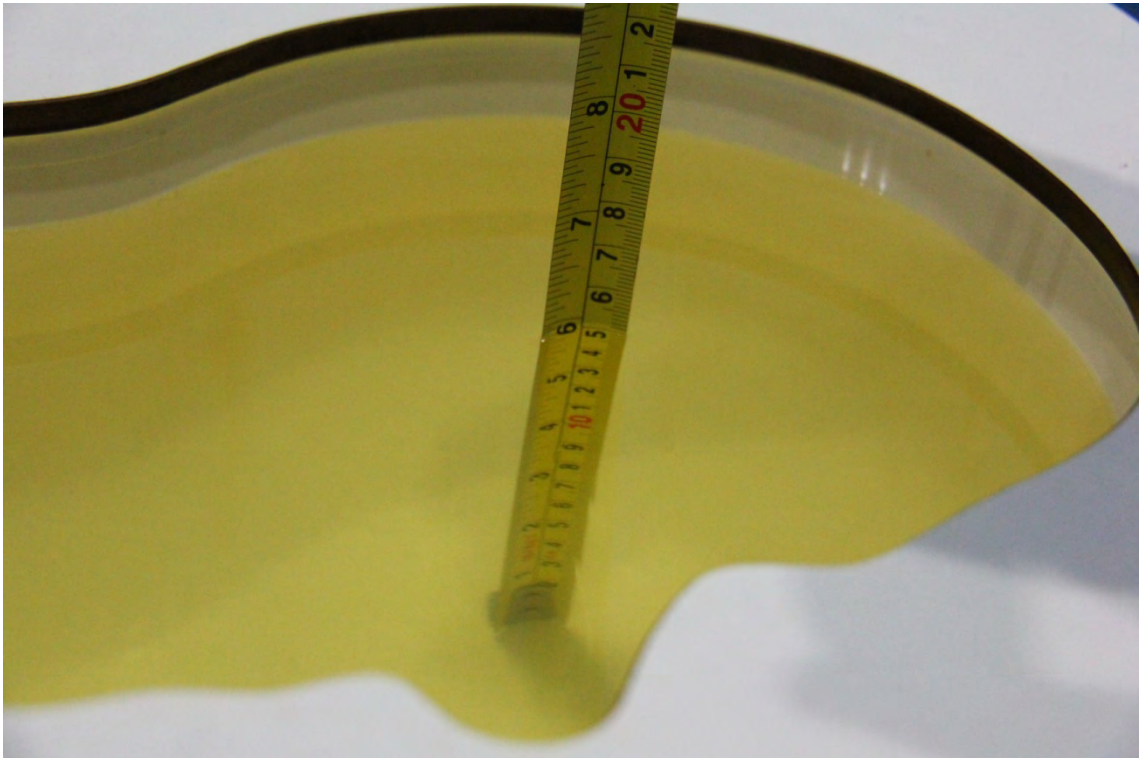


**Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)**

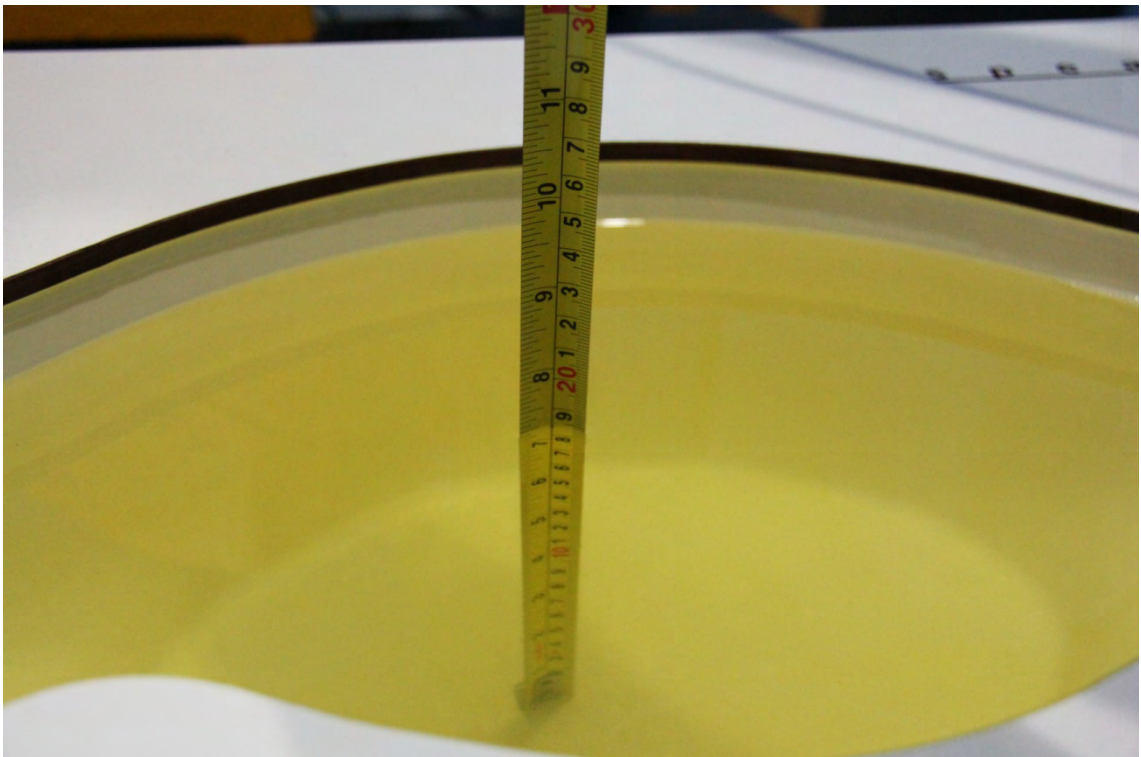

**Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)**

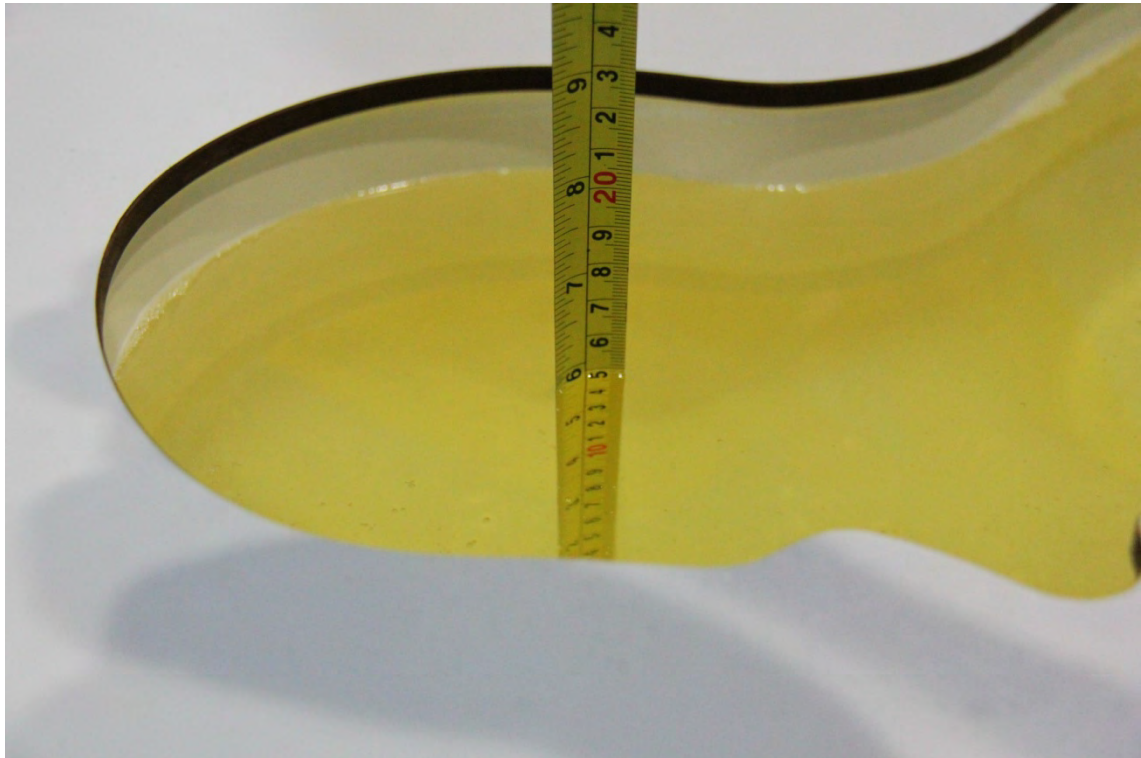

**Picture 7-5 Liquid depth in the Head Phantom (2450MHz)**

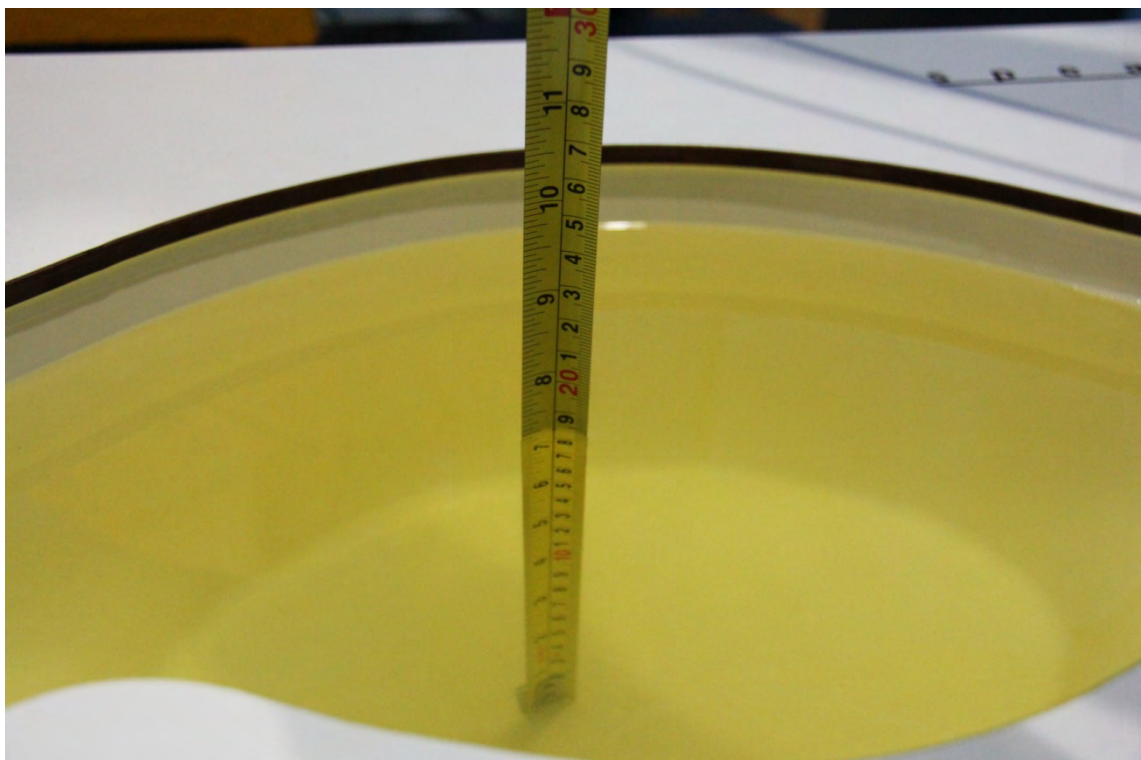


**Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)**


## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

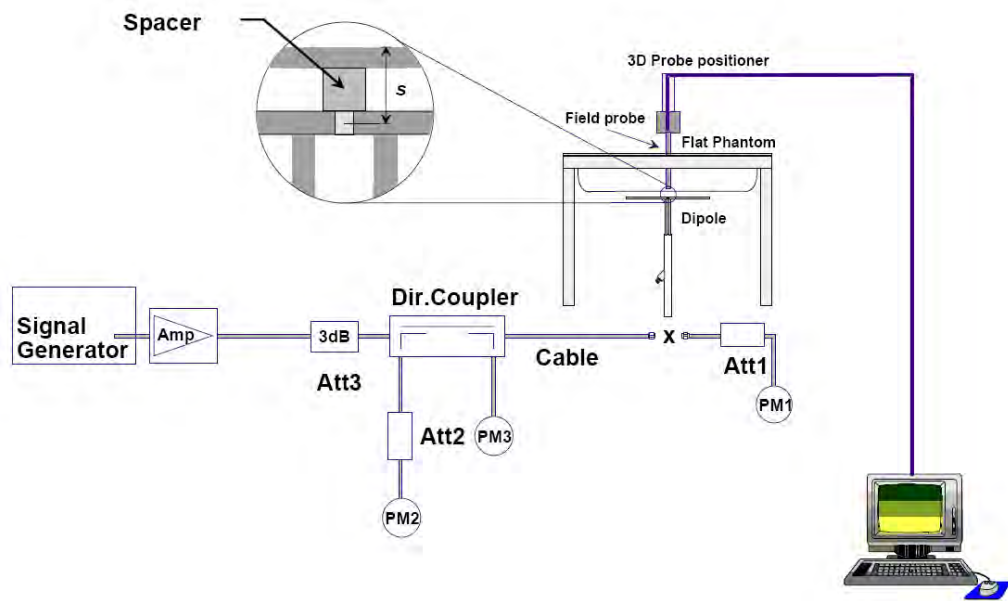

Picture 8.1 System Setup for System Evaluation

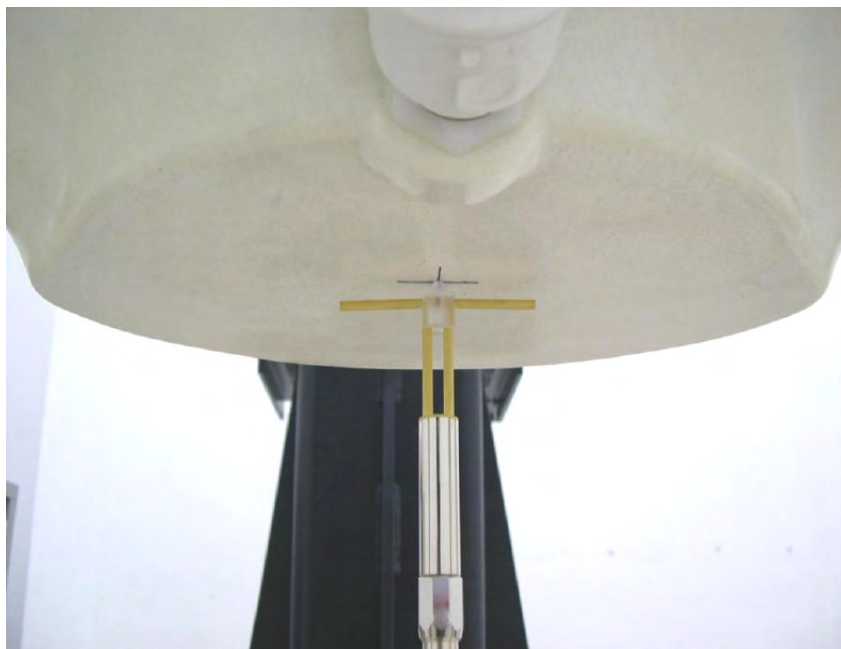

Picture 8.2 Photo of Dipole Setup

## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-01-19	835 MHz	6.07	9.30	6.28	9.60	3.46%	3.23%
2013-01-21	1900 MHz	20.6	39.1	20.36	38.76	-1.17%	-0.87%
2013-01-17	2450 MHz	24.4	52.4	23.60	52.00	-3.28%	-0.76%

**Table 8.2: System Verification of Body**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-01-19	835 MHz	6.20	9.36	6.32	9.52	1.94%	1.71%
2013-01-21	1900 MHz	21.3	39.9	21.52	40.40	1.03%	1.25%
2013-01-17	2450 MHz	23.6	50.4	23.68	51.20	0.34%	1.59%



## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


**Step 1:** The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

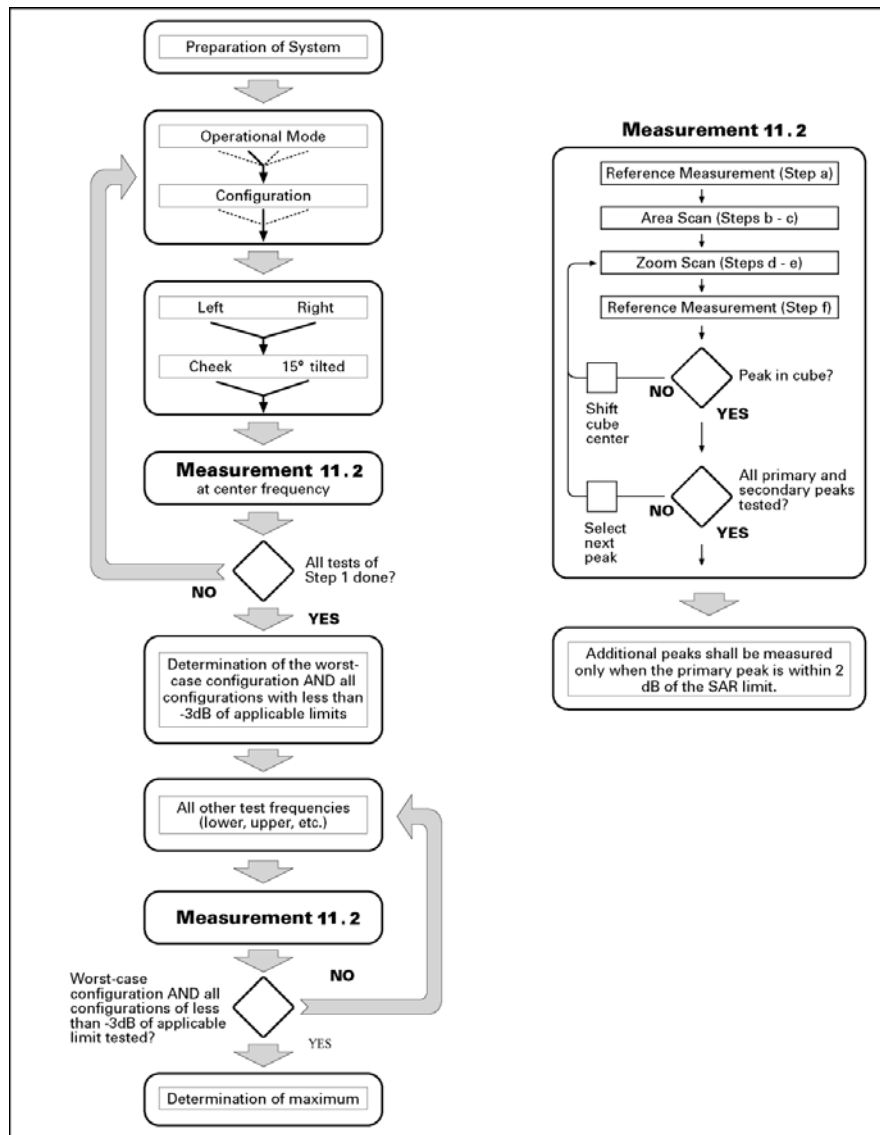

Picture 9.1 Block diagram of the tests to be performed

## 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

**For Release 5 HSDPA Data Devices:**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

**For Release 6 HSPA Data Devices**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1} : 47/15$ $\beta_{ed2} : 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

**9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR**

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

**9.5 Power Drift**

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.1 to Table 14.15 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## **10 Area Scan Based 1-g SAR**

### **10.1 Requirement of KDB**

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2$  W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### **10.2 Fast SAR Algorithms**

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

## 11 Conducted Output Power

### 11.1 Manufacturing tolerance

**Table 11.1: GSM Speech**

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.3	32.3	32.3
Tolerance $\pm$ (dB)	1	1	1
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.3	29.3	29.3
Tolerance $\pm$ (dB)	1	1	1

**Table 11.2: GPRS and EGPRS (GMSK Modulation)**

GSM 850 GPRS				
Channel		251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tolerance $\pm$ (dB)	1	1	1
2 Txslots	Target (dBm)	29.5	29.5	29.5
	Tolerance $\pm$ (dB)	1	1	1
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tolerance $\pm$ (dB)	1	1	1
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tolerance $\pm$ (dB)	1	1	1
GSM 850 EGPRS				
Channel		251	190	128
1 Txslot	Target (dBm)	32.3	32.3	32.3
	Tolerance $\pm$ (dB)	1	1	1
2 Txslots	Target (dBm)	29.5	29.5	29.5
	Tolerance $\pm$ (dB)	1	1	1
3Txslots	Target (dBm)	27.5	27.5	27.5
	Tolerance $\pm$ (dB)	1	1	1
4 Txslots	Target (dBm)	26.5	26.5	26.5
	Tolerance $\pm$ (dB)	1	1	1
GSM 1900 GPRS				
Channel		810	661	512
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tolerance $\pm$ (dB)	1	1	1
2 Txslots	Target (dBm)	27	27	27
	Tolerance $\pm$ (dB)	1	1	1
3Txslots	Target (dBm)	25	25	25
	Tolerance $\pm$ (dB)	1	1	1

4 Txslots	Target (dBm)	24	24	24
	Tolerance $\pm$ (dB)	1	1	1
GSM 1900 EGPRS				
Channel		<b>810</b>	<b>661</b>	<b>512</b>
1 Txslot	Target (dBm)	29.3	29.3	29.3
	Tolerance $\pm$ (dB)	1	1	1
2 Txslots	Target (dBm)	27	27	27
	Tolerance $\pm$ (dB)	1	1	1
3Txslots	Target (dBm)	25	25	25
	Tolerance $\pm$ (dB)	1	1	1
4 Txslots	Target (dBm)	24	24	24
	Tolerance $\pm$ (dB)	1	1	1

**Table 11.3: WCDMA**

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23	23	23
Tolerance $\pm$ (dB)	1	1	1
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22	22	22
Tolerance $\pm$ (dB)	1	1	1

**Table 11.4: WiFi**

Mode	Channel	Target (dBm)	Tolerance $\pm$ (dB)
802.11 b	1	15.5	1
	6	15.5	1
	11	15.5	1

## 11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 11.5: The conducted power measurement results for GSM850/1900**

GSM 850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.42	32.32	32.31
GSM 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.48	29.50	29.50

**Table 11.6: The conducted power measurement results for GPRS and EGPRS**

GSM 850 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.42	32.31	32.31	-9.03dB	23.39	23.28	23.28
2 Txslots	29.15	29.01	29.00	-6.02dB	23.13	22.99	22.98
<b>3Txslots</b>	28.24	28.09	28.07	-4.26dB	<b>23.98</b>	<b>23.83</b>	<b>23.81</b>
4 Txslots	26.37	26.23	26.19	-3.01dB	23.36	23.22	23.18
GSM 850 EGPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.41	32.32	32.30	-9.03dB	23.38	23.29	23.27
2 Txslots	29.13	29.03	28.99	-6.02dB	23.11	23.01	22.97
<b>3Txslots</b>	28.23	28.10	28.06	-4.26dB	<b>23.97</b>	<b>23.84</b>	<b>23.80</b>
4 Txslots	26.36	26.23	26.20	-3.01dB	23.35	23.22	23.19
PCS1900 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.48	29.50	29.51	-9.03dB	20.45	20.47	20.48
<b>2 Txslots</b>	27.17	27.18	27.19	-6.02dB	<b>21.15</b>	<b>21.16</b>	<b>21.17</b>
3Txslots	24.44	24.42	24.43	-4.26dB	20.18	20.16	20.17
4 Txslots	23.21	23.23	23.22	-3.01dB	20.20	20.22	20.21
PCS1900 EGPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.49	29.50	29.51	-9.03dB	20.46	20.47	20.48
<b>2 Txslots</b>	27.18	27.17	27.19	-6.02dB	<b>21.16</b>	<b>21.15</b>	<b>21.17</b>
3Txslots	24.45	24.42	24.43	-4.26dB	20.19	20.16	20.17
4 Txslots	23.21	23.23	23.22	-3.01dB	20.20	20.22	20.21

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 3Txslots for GSM850 and 2Txslots for GSM1900.**

**Note: According to the KDB941225 D03, “when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used”.**



### 11.3 WCDMA Measurement result

Table 11.7: The conducted Power for WCDMA850/1900

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	\	22.97	23.17	23.06
HSUPA	1	19.64	19.92	19.85
	2	18.63	18.92	18.85
	3	19.15	19.41	19.36
	4	19.67	19.93	19.86
	5	21.66	21.89	21.82
Item	band	FDDII result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	22.31	22.25	21.64
HSUPA	1	20.28	20.30	20.35
	2	19.27	19.32	19.38
	3	19.79	19.78	19.86
	4	20.24	20.27	20.39
	5	22.25	22.26	21.65

### 11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Channel	Ch 0 (2402 MHz)	Ch 39 (2441 MHz)	Ch 78 (2480 MHz)
Peak Conducted Output Power(dBm)	5.42	7.58	9.60

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	15.86	15.82	15.74	15.53
6	15.35	15.31	15.25	14.86
11	14.95	14.91	14.85	14.67

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	12.70	12.56	12.43	12.19	11.95	11.57	11.23	10.87
6	12.31	12.19	12.07	11.58	11.37	11.00	10.66	10.54
11	11.96	11.85	11.74	11.50	11.26	10.62	10.27	10.15

802.11n (dBm) - HT20

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	10.78	10.53	10.28	10.05	9.47	9.15	9.02	8.90
6	10.30	9.97	9.75	9.30	8.95	8.63	8.50	8.39
11	9.85	9.58	9.36	9.14	8.78	8.25	8.13	8.01

802.11n (dBm) - HT40

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	8.91	8.41	8.02	7.71	6.96	6.60	6.42	6.32
6	8.64	8.22	7.84	7.32	6.83	6.47	6.32	6.22
9	8.30	7.85	7.46	7.17	6.68	6.32	6.15	6.02

The peak conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	19.41	19.48	21.07	22.43
6	/	/	/	23.47
11	/	/	/	23.06

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	21.43	21.42	21.25	21.06	21.53	21.57	21.68	21.71
6	/	/	/	/	/	/	/	20.16
11	/	/	/	/	/	/	/	19.67

802.11n (dBm) - HT20

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	17.77	18.08	18.13	18.69	18.64	18.51	18.57	18.49
6	/	/	/	18.01	/	/	/	/
11	/	/	/	17.81	/	/	/	/

802.11n (dBm) - HT40

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
3	15.29	15.44	15.54	15.98	15.95	15.93	15.73	15.71
6	/	/	/	15.57	/	/	/	/
9	/	/	/	15.43	/	/	/	/

SAR is not required for 802.11g channels if the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for "802.11b, 1Mbps, channel 1".


## 12 Simultaneous TX SAR Considerations

### 12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances

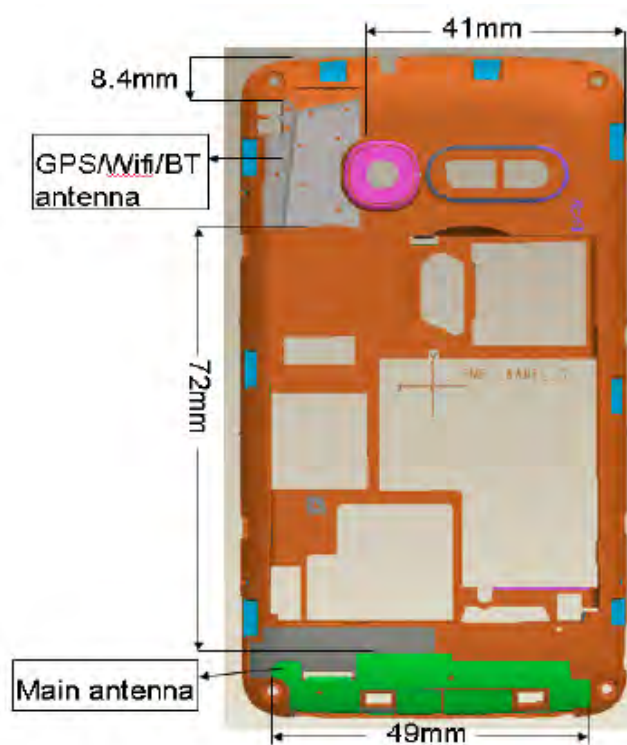

Picture 12.1 Antenna Locations

### 12.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

### Appendix A

#### SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Picture 12.2 Power Thresholds

## 13 Evaluation of Simultaneous

Table 13.1: Summary of Transmitters

Band/Mode	F(GHz)	SAR test exclusion threshold (mW)	RF output power (mW)
Bluetooth	2.441	19	9.12
2.4GHz WLAN 802.11 b	2.45	19	38.55

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for WiFi is considered with measurement results of GSM/WCDMA and WiFi. Stand-alone SAR and simultaneous transmission SAR for Bluetooth should not be performed.

Table 13.2: The sum of reported SAR values

	Position	GSM/WCDMA	WiFi	Sum
Maximum reported value for Head	Left hand, Touch cheek	0.79	0.13	<b>0.92</b>
	Right hand, Touch cheek	1.41	0.07	<b>1.48</b>
Maximum reported SAR value for Body	Toward Ground	1.27	0.12	<b>1.39</b>
	Bottom Side	1.35	/	/

According to the above table, the sum of reported SAR values for GSM/WCDMA and WiFi < 1.6W/kg. So the simultaneous transmission SAR is not required for WiFi transmitter.

## 14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

### 14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

**Table 14.1: The evaluation of multi-batteries for Head Test**

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1852.4	9262	WCDMA1900	Right	Touch	TLi014A1	1.03	0.04
1852.4	9262	WCDMA1900	Right	Touch	TLiB50B	1.02	0.05

Note: According to the values in the above table, the battery, TLi014A1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

**Table 14.2: The evaluation of multi-batteries for Body Test (Slide down)**

Frequency		Headset	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
848.8	251	\	Ground	10	TLi014A1	0.995	0.19
848.8	251	\	Ground	10	TLiB50B	0.734	0.11

Note: According to the values in the above table, the battery, TLi014A1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

### 14.2 SAR Test Result

**Table 14.3: Duty Cycle**

	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850	1:2.67
GPRS&EGPRS for GSM1900	1:4
WCDMA850/1900	1:1

**Table 14.4: SAR Values (GSM 850 MHz Band - Head) with battery TLI014A1**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
848.8	251	Left	Touch	Fig.1	32.42	0.406	<b>0.50</b>	0.549	<b>0.67</b>	0.09
836.6	190	Left	Touch	Fig.2	32.32	0.310	<b>0.39</b>	0.452	<b>0.57</b>	0.03
824.2	128	Left	Touch	Fig.3	32.31	0.268	<b>0.34</b>	0.389	<b>0.49</b>	0.08
848.8	251	Left	Tilt	Fig.4	32.42	0.222	<b>0.27</b>	0.322	<b>0.39</b>	0.10
836.6	190	Left	Tilt	Fig.5	32.32	0.179	<b>0.22</b>	0.259	<b>0.32</b>	0.02
824.2	128	Left	Tilt	Fig.6	32.31	0.159	<b>0.20</b>	0.230	<b>0.29</b>	0.05
848.8	251	Right	Touch	Fig.7	32.42	0.375	<b>0.46</b>	0.501	<b>0.61</b>	0.01
836.6	190	Right	Touch	Fig.8	32.32	0.294	<b>0.37</b>	0.430	<b>0.54</b>	-0.14
824.2	128	Right	Touch	Fig.9	32.31	0.255	<b>0.32</b>	0.372	<b>0.47</b>	0.02
848.8	251	Right	Tilt	Fig.10	32.42	0.213	<b>0.26</b>	0.312	<b>0.38</b>	0.07
836.6	190	Right	Tilt	Fig.11	32.32	0.180	<b>0.23</b>	0.261	<b>0.33</b>	0.10
824.2	128	Right	Tilt	Fig.12	32.31	0.160	<b>0.20</b>	0.231	<b>0.29</b>	0.06

**Table 14.4-1: SAR Values with Zoom scan for GSM850 Head**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
848.8	251	Left	Touch	32.42	0.406	<b>0.50</b>	0.549	<b>0.67</b>	0.09
848.8	251	Right	Touch	32.42	0.375	<b>0.46</b>	0.501	<b>0.61</b>	0.01

**Table 14.5: SAR Values (GSM 850 MHz Band - Body) with battery TLI014A1**

Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.6	190	GPRS (2.67)	Phantom	Fig.13	28.09	0.452	<b>0.50</b>	0.626	<b>0.69</b>	-0.18
848.8	251	GPRS (2.67)	Ground	Fig.14	28.24	0.723	<b>0.77</b>	0.995	<b>1.06</b>	0.19
836.6	190	GPRS (2.67)	Ground	Fig.15	28.09	0.618	<b>0.68</b>	0.894	<b>0.98</b>	-0.11
824.2	128	GPRS (2.67)	Ground	Fig.16	28.07	0.571	<b>0.63</b>	0.841	<b>0.93</b>	-0.02
836.6	190	GPRS (2.67)	Left	Fig.17	28.09	0.407	<b>0.45</b>	0.582	<b>0.64</b>	0.13
836.6	190	GPRS (2.67)	Right	Fig.18	28.09	0.331	<b>0.36</b>	0.477	<b>0.52</b>	0.13
836.6	190	GPRS (2.67)	Bottom	Fig.19	28.09	0.051	<b>0.06</b>	0.087	<b>0.10</b>	-0.16
848.8	251	EGPRS (2.67)	Ground	Fig.20	28.23	0.651	<b>0.69</b>	0.943	<b>1.00</b>	-0.10
836.6	190	EGPRS (2.67)	Ground	Fig.21	28.10	0.618	<b>0.68</b>	0.894	<b>0.98</b>	0.05
824.2	128	EGPRS (2.67)	Ground	Fig.22	28.06	0.544	<b>0.60</b>	0.788	<b>0.87</b>	0.09
848.8	251	Speech	Ground (Headset1)	Fig.23	32.42	0.536	<b>0.66</b>	0.778	<b>0.95</b>	-0.00
848.8	251	Speech	Ground (Headset2)	Fig.24	32.42	0.258	<b>0.32</b>	0.375	<b>0.46</b>	-0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3160A11C2, the type of Headset2 is CCB3160A11C4.

**Table 14.5-1: SAR Values with Zoom scan for GSM850 Body**

Frequency		Mode (number of timeslots)	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.6	190	GPRS (2.67)	Phantom	28.09	0.452	<b>0.50</b>	0.626	<b>0.69</b>	-0.18
848.8	251	GPRS (2.67)	Ground	28.24	0.723	<b>0.77</b>	0.995	<b>1.06</b>	0.19
836.6	190	GPRS (2.67)	Left	28.09	0.407	<b>0.45</b>	0.582	<b>0.64</b>	0.13
836.6	190	GPRS (2.67)	Right	28.09	0.331	<b>0.36</b>	0.477	<b>0.52</b>	0.13
836.6	190	GPRS (2.67)	Bottom	28.09	0.051	<b>0.06</b>	0.087	<b>0.10</b>	-0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.6: SAR Values (GSM 1900 MHz Band - Head) with battery TLi014A1**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1909.8	810	Left	Touch	Fig.25	29.48	0.175	<b>0.21</b>	0.293	<b>0.35</b>	0.15
1880	661	Left	Touch	Fig.26	29.50	0.163	<b>0.20</b>	0.276	<b>0.33</b>	-0.04
1850.2	512	Left	Touch	Fig.27	29.50	0.158	<b>0.19</b>	0.283	<b>0.34</b>	0.12
1909.8	810	Left	Tilt	Fig.28	29.48	0.089	<b>0.11</b>	0.162	<b>0.20</b>	0.15
1880	661	Left	Tilt	Fig.29	29.50	0.090	<b>0.11</b>	0.163	<b>0.20</b>	0.03
1850.2	512	Left	Tilt	Fig.30	29.50	0.079	<b>0.09</b>	0.142	<b>0.17</b>	-0.02
1909.8	810	Right	Touch	Fig.31	29.48	0.343	<b>0.41</b>	0.630	<b>0.76</b>	-0.01
1880	661	Right	Touch	Fig.32	29.50	0.389	<b>0.47</b>	0.672	<b>0.81</b>	0.04
1850.2	512	Right	Touch	Fig.33	29.50	0.330	<b>0.40</b>	0.610	<b>0.73</b>	0.08
1909.8	810	Right	Tilt	Fig.34	29.48	0.083	<b>0.10</b>	0.150	<b>0.18</b>	0.00
1880	661	Right	Tilt	Fig.35	29.50	0.089	<b>0.11</b>	0.158	<b>0.19</b>	-0.04
1850.2	512	Right	Tilt	Fig.36	29.50	0.085	<b>0.10</b>	0.151	<b>0.18</b>	0.03

**Table 14.6-1: SAR Values with Zoom scan for GSM1900 Head**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1880	661	Right	Touch	29.50	0.389	<b>0.47</b>	0.672	<b>0.81</b>	0.04

**Table 14.7: SAR Values (GSM 1900 MHz Band - Body) with battery TLi014A1**

Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	661	GPRS (2)	Phantom	Fig.37	27.18	0.282	<b>0.34</b>	0.449	<b>0.54</b>	0.03
1880	661	GPRS (2)	Ground	Fig.38	27.18	0.391	<b>0.47</b>	0.633	<b>0.76</b>	0.08
1880	661	GPRS (2)	Left	Fig.39	27.18	0.056	<b>0.07</b>	0.098	<b>0.12</b>	0.05
1880	661	GPRS (2)	Right	Fig.40	27.18	0.077	<b>0.09</b>	0.133	<b>0.16</b>	-0.07
1909.8	810	GPRS (2)	Bottom	Fig.41	27.17	0.469	<b>0.57</b>	0.850	<b>1.03</b>	0.10
1880	661	GPRS (2)	Bottom	Fig.42	27.18	0.432	<b>0.52</b>	0.796	<b>0.96</b>	0.11
1850.2	512	GPRS (2)	Bottom	Fig.43	27.19	0.372	<b>0.45</b>	0.678	<b>0.82</b>	0.04
1909.8	810	EGPRS (2)	Bottom	Fig.44	27.18	0.426	<b>0.51</b>	0.797	<b>0.96</b>	0.17
1909.8	810	Speech	Bottom (Headset1)	Fig.45	29.48	0.269	<b>0.32</b>	0.500	<b>0.60</b>	0.00
1909.8	810	Speech	Bottom (Headset2)	Fig.46	29.48	0.268	<b>0.32</b>	0.504	<b>0.61</b>	0.00

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3160A11C2, the type of Headset2 is CCB3160A11C4.

**Table 14.7-1: SAR Values with Zoom scan for GSM1900 Body**

Frequency		Mode (number of timeslots)	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1880	661	GPRS (2)	Ground	27.18	0.391	<b>0.47</b>	0.633	<b>0.76</b>	0.08
1909.8	810	GPRS (2)	Bottom	27.17	0.469	<b>0.57</b>	0.850	<b>1.03</b>	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.8: SAR Values (WCDMA 850 MHz Band - Head) with battery TLi014A1**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
846.6	4233	Left	Touch	Fig.47	22.97	0.351	<b>0.44</b>	0.516	<b>0.65</b>	0.12
836.4	4182	Left	Touch	Fig.48	23.17	0.481	<b>0.58</b>	0.652	<b>0.79</b>	0.10
826.4	4132	Left	Touch	Fig.49	23.06	0.311	<b>0.39</b>	0.456	<b>0.57</b>	-0.01
846.6	4233	Left	Tilt	Fig.50	22.97	0.201	<b>0.25</b>	0.292	<b>0.37</b>	0.06
836.4	4182	Left	Tilt	Fig.51	23.17	0.223	<b>0.27</b>	0.324	<b>0.39</b>	0.06
826.4	4132	Left	Tilt	Fig.52	23.06	0.173	<b>0.21</b>	0.252	<b>0.31</b>	0.00
846.6	4233	Right	Touch	Fig.53	22.97	0.334	<b>0.42</b>	0.487	<b>0.62</b>	0.05
836.4	4182	Right	Touch	Fig.54	23.17	0.444	<b>0.54</b>	0.591	<b>0.72</b>	0.03
826.4	4132	Right	Touch	Fig.55	23.06	0.300	<b>0.37</b>	0.438	<b>0.54</b>	0.09
846.6	4233	Right	Tilt	Fig.56	22.97	0.192	<b>0.24</b>	0.280	<b>0.35</b>	0.06
836.4	4182	Right	Tilt	Fig.57	23.17	0.229	<b>0.28</b>	0.333	<b>0.40</b>	0.06
826.4	4132	Right	Tilt	Fig.58	23.06	0.183	<b>0.23</b>	0.265	<b>0.33</b>	0.06



**Table 14.8-1: SAR Values with Zoom scan for WCDMA850 Head**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.4	4182	Left	Touch	23.17	0.481	<b>0.58</b>	0.652	<b>0.79</b>	0.10
836.4	4182	Right	Touch	23.17	0.444	<b>0.54</b>	0.591	<b>0.72</b>	0.03

**Table 14.9: SAR Values (WCDMA 850 MHz Band - Body) with battery TLi014A1**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.4	4182	Phantom	Fig.59	23.17	0.534	<b>0.65</b>	0.719	<b>0.87</b>	-0.01
846.6	4233	Ground	Fig.60	22.97	0.729	<b>0.92</b>	0.992	<b>1.26</b>	0.02
836.4	4182	Ground	Fig.61	23.17	0.764	<b>0.92</b>	1.05	<b>1.27</b>	0.01
826.4	4132	Ground	Fig.62	23.06	0.690	<b>0.86</b>	0.948	<b>1.18</b>	0.04
836.4	4182	Left	Fig.63	23.17	0.468	<b>0.57</b>	0.663	<b>0.80</b>	-0.06
836.4	4182	Right	Fig.64	23.17	0.402	<b>0.49</b>	0.572	<b>0.69</b>	0.01
836.4	4182	Bottom	Fig.65	23.17	0.059	<b>0.07</b>	0.099	<b>0.12</b>	-0.11
836.4	4182	Ground (Headset1)	Fig.66	23.17	0.462	<b>0.56</b>	0.713	<b>0.86</b>	-0.12
836.4	4182	Ground (Headset2)	Fig.67	23.17	0.526	<b>0.64</b>	0.729	<b>0.88</b>	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3160A11C2, the type of Headset2 is CCB3160A11C4.

**Table 14.9-1: SAR Values with Zoom scan for WCDMA850 Body**

Frequency		Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
836.4	4182	Phantom	23.17	0.534	<b>0.65</b>	0.719	<b>0.87</b>	-0.01
846.6	4233	Ground	22.97	0.729	<b>0.92</b>	0.992	<b>1.26</b>	0.02
836.4	4182	Ground	23.17	0.764	<b>0.92</b>	1.05	<b>1.27</b>	0.01
826.4	4132	Ground	23.06	0.690	<b>0.86</b>	0.948	<b>1.18</b>	0.04
836.4	4182	Left	23.17	0.468	<b>0.57</b>	0.663	<b>0.80</b>	-0.06
836.4	4182	Right	23.17	0.402	<b>0.49</b>	0.572	<b>0.69</b>	0.01
836.4	4182	Bottom	23.17	0.059	<b>0.07</b>	0.099	<b>0.12</b>	-0.11
836.4	4182	Ground (Headset1)	23.17	0.462	<b>0.56</b>	0.713	<b>0.86</b>	-0.12
836.4	4182	Ground (Headset2)	23.17	0.526	<b>0.64</b>	0.729	<b>0.88</b>	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3160A11C2, the type of Headset2 is CCB3160A11C4.

**Table 14.10: SAR Values (WCDMA 1900 MHz Band - Head) with battery TLi014A1**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1907.6	9538	Left	Touch	Fig.68	22.31	0.354	<b>0.41</b>	0.604	<b>0.71</b>	-0.15
1880	9400	Left	Touch	Fig.69	22.25	0.280	<b>0.33</b>	0.479	<b>0.57</b>	0.02
1852.4	9262	Left	Touch	Fig.70	21.64	0.328	<b>0.45</b>	0.559	<b>0.76</b>	0.05
1907.6	9538	Left	Tilt	Fig.71	22.31	0.157	<b>0.18</b>	0.283	<b>0.33</b>	0.04
1880	9400	Left	Tilt	Fig.72	22.25	0.137	<b>0.16</b>	0.243	<b>0.29</b>	0.01
1852.4	9262	Left	Tilt	Fig.73	21.64	0.162	<b>0.22</b>	0.285	<b>0.39</b>	-0.00
1907.6	9538	Right	Touch	Fig.74	22.31	0.512	<b>0.60</b>	0.939	<b>1.10</b>	-0.12
1880	9400	Right	Touch	Fig.75	22.25	0.472	<b>0.56</b>	0.868	<b>1.03</b>	-0.06
1852.4	9262	Right	Touch	Fig.76	21.64	0.597	<b>0.82</b>	1.03	<b>1.41</b>	0.04
1907.6	9538	Right	Tilt	Fig.77	22.31	0.133	<b>0.16</b>	0.240	<b>0.28</b>	0.02
1880	9400	Right	Tilt	Fig.78	22.25	0.133	<b>0.16</b>	0.238	<b>0.28</b>	-0.04
1852.4	9262	Right	Tilt	Fig.79	21.64	0.151	<b>0.21</b>	0.267	<b>0.37</b>	-0.02

**Table 14.10-1: SAR Values with Zoom scan for WCDMA1900 Head**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1852.4	9262	Right	Touch	21.64	0.597	<b>0.82</b>	1.03	<b>1.41</b>	0.04

**Table 14.11: SAR Values (WCDMA 1900 MHz Band - Body) with battery TLi014A1**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1907.6	9538	Phantom	Fig.80	22.31	0.456	<b>0.53</b>	0.762	<b>0.89</b>	-0.10
1907.6	9538	Ground	Fig.81	22.31	0.497	<b>0.58</b>	0.780	<b>0.91</b>	-0.01
1907.6	9538	Left	Fig.82	22.31	0.061	<b>0.07</b>	0.107	<b>0.13</b>	-0.02
1907.6	9538	Right	Fig.83	22.31	0.104	<b>0.12</b>	0.184	<b>0.22</b>	0.03
1907.6	9538	Bottom	Fig.84	22.31	0.475	<b>0.56</b>	0.903	<b>1.06</b>	-0.03
1880	9400	Bottom	Fig.85	22.25	0.473	<b>0.56</b>	0.893	<b>1.06</b>	-0.05
1852.4	9262	Bottom	Fig.86	21.64	0.562	<b>0.77</b>	0.990	<b>1.35</b>	0.01
1907.6	9538	Bottom (Headset1)	Fig.87	22.31	0.428	<b>0.50</b>	0.806	<b>0.94</b>	0.01
1880	9400	Bottom (Headset1)	Fig.88	22.25	0.435	<b>0.52</b>	0.812	<b>0.97</b>	0.01
1852.4	9262	Bottom (Headset1)	Fig.89	21.64	0.498	<b>0.68</b>	0.926	<b>1.27</b>	0.01
1907.6	9538	Bottom (Headset2)	Fig.90	22.31	0.481	<b>0.56</b>	0.904	<b>1.06</b>	0.01
1880	9400	Bottom (Headset2)	Fig.91	22.25	0.492	<b>0.58</b>	0.924	<b>1.10</b>	0.07

1852.4	9262	Bottom (Headset2)	Fig.92	21.64	0.499	<b>0.68</b>	0.927	<b>1.27</b>	0.02
--------	------	----------------------	--------	-------	-------	-------------	-------	-------------	------

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3160A11C2, the type of Headset2 is CCB3160A11C4.

**Table 14.11-1: SAR Values with Zoom scan for WCDMA1900 Body**

Frequency		Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
1907.6	9538	Ground	22.31	0.497	<b>0.73</b>	0.780	<b>1.15</b>	-0.01
1852.4	9262	Bottom	21.64	0.562	<b>0.77</b>	0.990	<b>1.35</b>	0.562

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.12: SAR Values (Wi-Fi 802.11b - Head) with battery TLi014A1**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2412	1	Left	Touch	Fig.93	15.86	0.046	<b>0.05</b>	0.112	<b>0.13</b>	0.02
2412	1	Left	Tilt	Fig.94	15.86	0.026	<b>0.03</b>	0.059	<b>0.07</b>	0.15
2412	1	Right	Touch	Fig.95	15.86	0.029	<b>0.03</b>	0.059	<b>0.07</b>	-0.15
2412	1	Right	Tilt	Fig.96	15.86	0.020	<b>0.02</b>	0.041	<b>0.05</b>	0.04

**Table 14.12-1: SAR Values with Zoom scan for WiFi 802.11b Head**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
2412	1	Left	Touch	15.86	0.046	<b>0.05</b>	0.112	<b>0.13</b>	0.02

**Table 14.13: SAR Values (Wi-Fi 802.11b - Body) with battery TLi014A1**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
2412	1	Phantom	Fig.97	15.86	0.017	<b>0.02</b>	0.031	<b>0.04</b>	-0.07
2412	1	Ground	Fig.98	15.86	0.039	<b>0.05</b>	0.102	<b>0.12</b>	-0.14
2412	1	Right	Fig.99	15.86	0.026	<b>0.03</b>	0.057	<b>0.07</b>	0.10
2412	1	Top	Fig.100	15.86	0.0088	<b>0.01</b>	0.018	<b>0.02</b>	-0.13

**Table 14.13-1: SAR Values with Zoom scan for WiFi 802.11b Body**

Frequency		Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
2412	1	Ground	15.86	0.039	<b>0.05</b>	0.102	<b>0.12</b>	-0.14

**Table 14.14: SAR Values (WCDMA 1900 MHz Band - Head) with battery TLiB50B**

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1852.4	9262	Right	Touch	Fig.101	21.64	0.595	<b>0.81</b>	1.02	<b>1.40</b>	0.05

**Table 14.14-1: SAR Values with Zoom scan for WCDMA1900 Head with battery TLiB50B**

Frequency		Side	Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1852.4	9262	Right	Touch	21.64	0.595	<b>0.81</b>	1.02	<b>1.40</b>	0.05

**Table 14.15: SAR Values (WCDMA 850 MHz Band - Body) with battery TLiB50B**

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.4	4182	Ground	Fig.102	23.17	0.755	<b>0.91</b>	1.03	<b>1.25</b>	-0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.15-1: SAR Values with Zoom scan for WCDMA1900 Body with battery TLiB50B**

Frequency		Test Position	Conducted Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
836.4	4182	Ground	23.17	0.755	<b>0.91</b>	1.03	<b>1.25</b>	-0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

## 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 15.1: SAR Measurement Variability for Body GSM 850 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
848.8	251	Ground	10	0.995	0.987	1.01	/

**Table 15.2: SAR Measurement Variability for Body GSM 1900 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1909.8	810	Bottom	10	0.850	0.848	1.00	/

**Table 15.3: SAR Measurement Variability for Body WCDMA 850 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
836.4	4182	Ground	10	1.05	1.03	1.02	/

**Table 15.4: SAR Measurement Variability for Head WCDMA1900 (1g)**

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1852.4	9262	Right	Touch	1.03	1.03	1.00	/

**Table 15.5: SAR Measurement Variability for Body WCDMA 1900 (1g)**

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1852.4	9262	Bottom	10	0.990	0.989	1.00	/

## 16 Measurement Uncertainty

### 16.1 Measurement Uncertainty for Normal SAR Tests

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test sample related</b>										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					18.5	18.2	

### 16.2 Measurement Uncertainty for Fast SAR Tests

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	$\infty$
<b>Test sample related</b>										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$

20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.2	19.9	

## 17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	February 14, 2012	One year
02	Power meter	NRVD	102083	September 11, 2012	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49070393	November 13, 2012	One Year
05	Amplifier	VTL5400	0505	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2012	One year
07	E-field Probe	SPEAG ES3DV3	3149	April 24, 2012	One year
08	DAE	SPEAG DAE4	771	November 20, 2012	One year
09	Dipole Validation Kit	SPEAG D835V2	443	May 03, 2012	One year
10	Dipole Validation Kit	SPEAG D1900V2	541	May 09, 2012	One year
11	Dipole Validation Kit	SPEAG D2450V2	853	May 02, 2012	One year

\*\*\*END OF REPORT BODY\*\*\*



## ANNEX A Graph Results

### 850 Left Cheek High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 40.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.572 W/kg

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.563 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.677 W/kg

**SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 0.567 W/kg


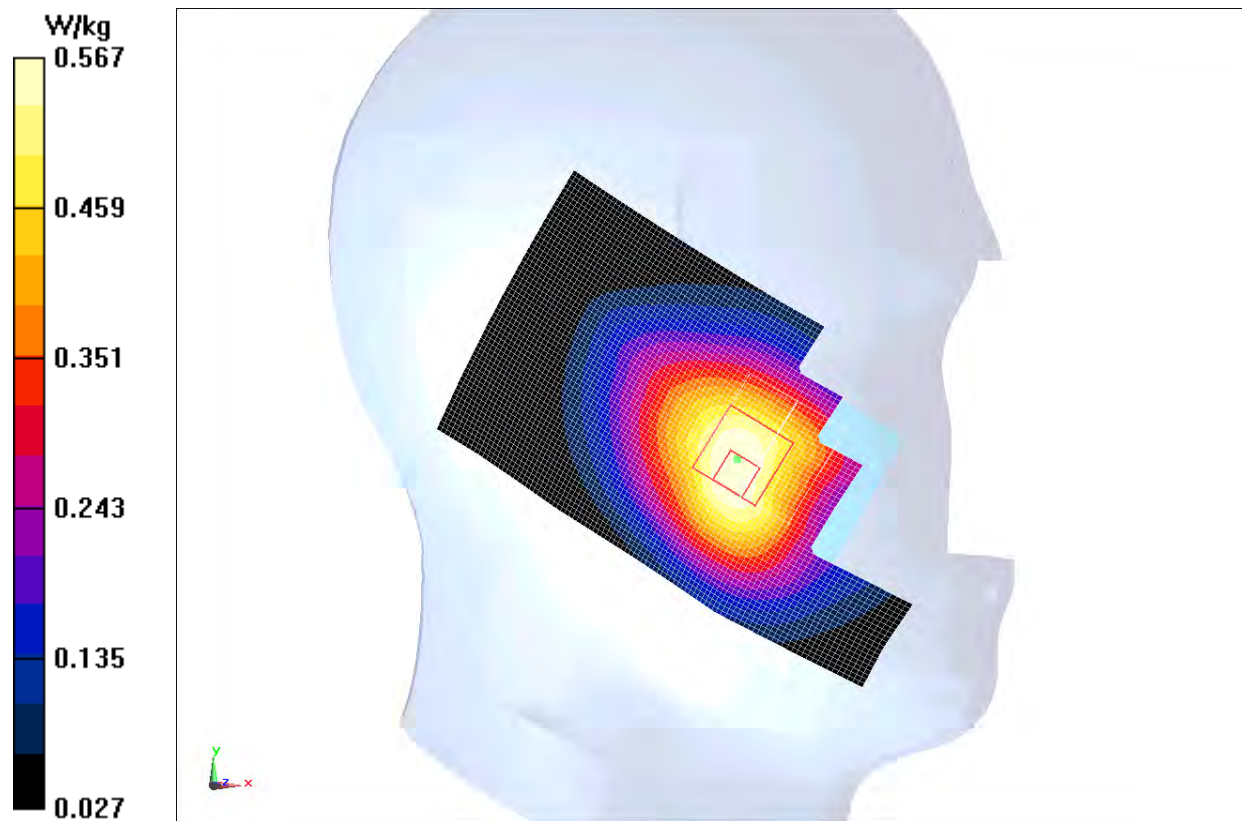


Fig. 1 850MHz CH251

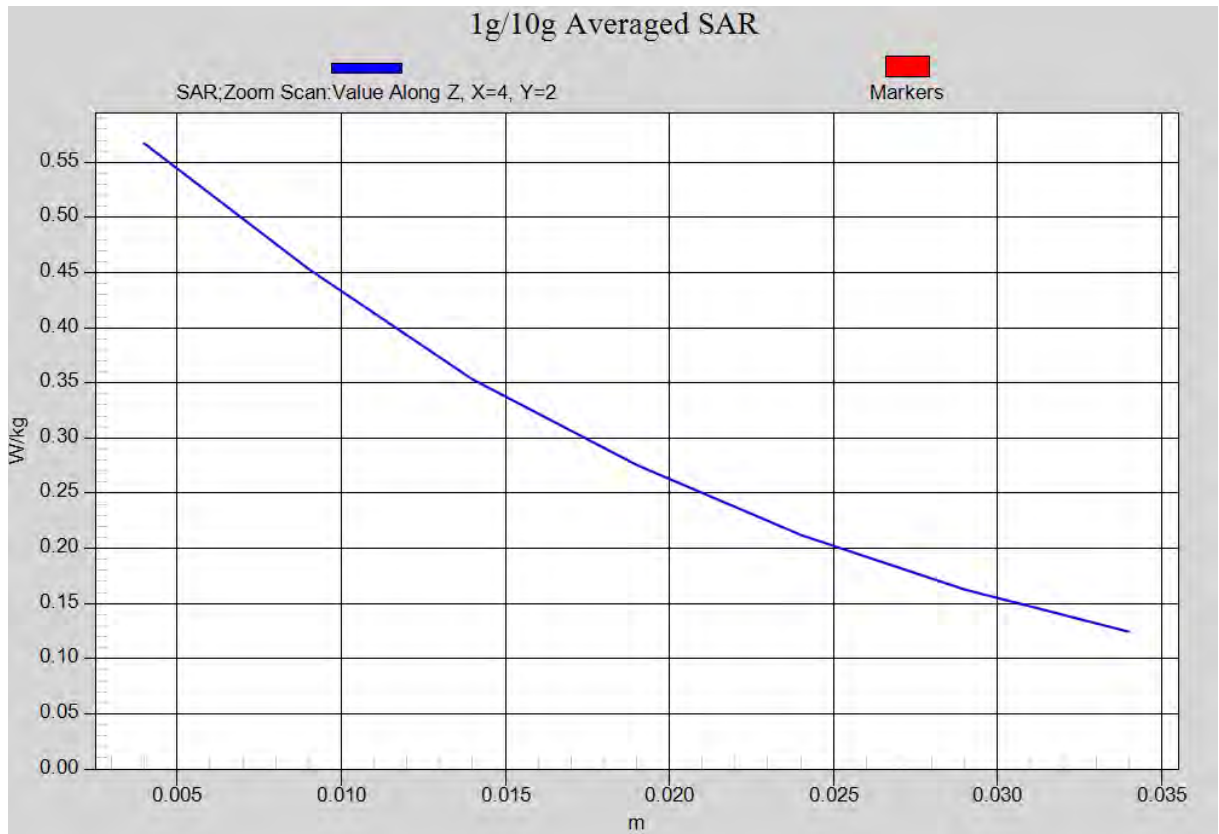

**Fig. 1-1 Z-Scan at power reference point (850 MHz CH251)**

### 850 Left Cheek Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.552 V/m; Power Drift = 0.03 dB

**Fast SAR: SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (interpolated) = 0.481 W/kg

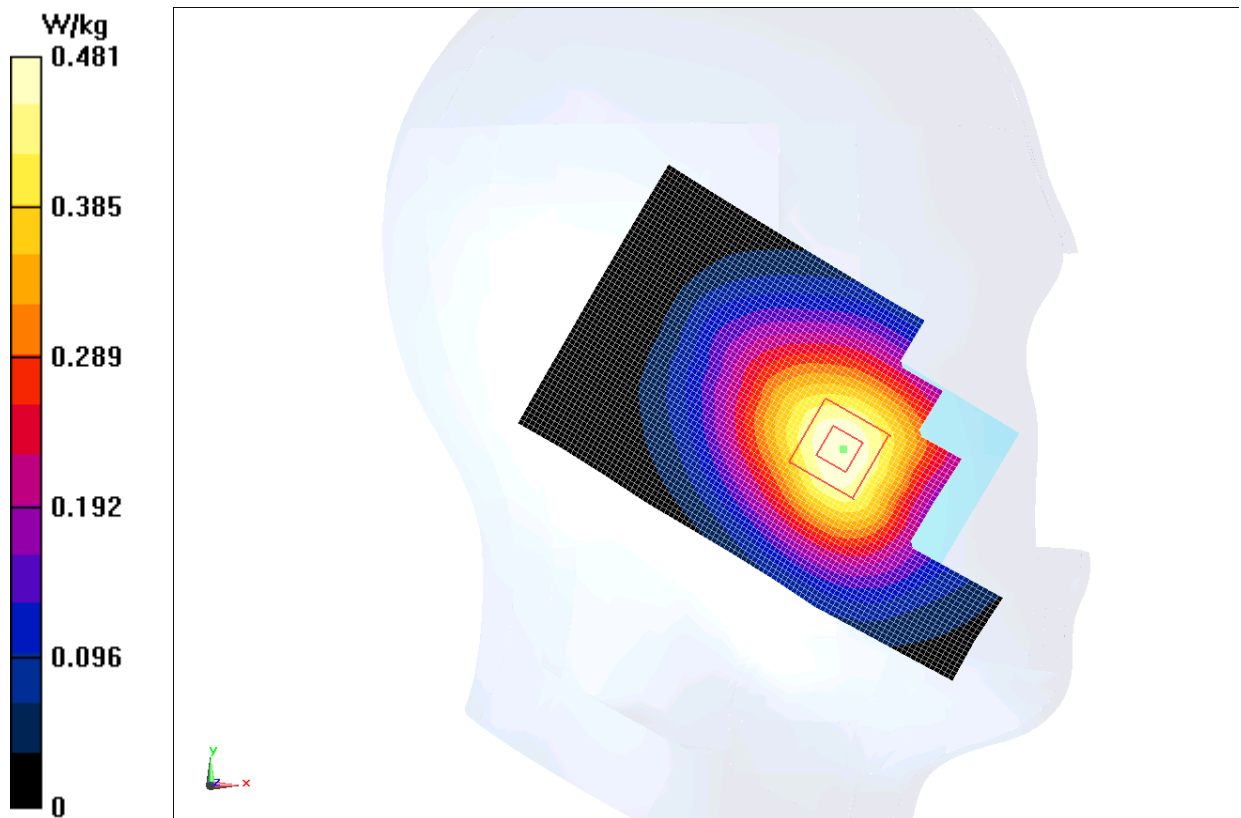


Fig. 2 850 MHz CH190

### 850 Left Cheek Low

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.872$  mho/m;  $\epsilon_r = 40.945$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.261 V/m; Power Drift = 0.08 dB

**Fast SAR: SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (interpolated) = 0.413 W/kg

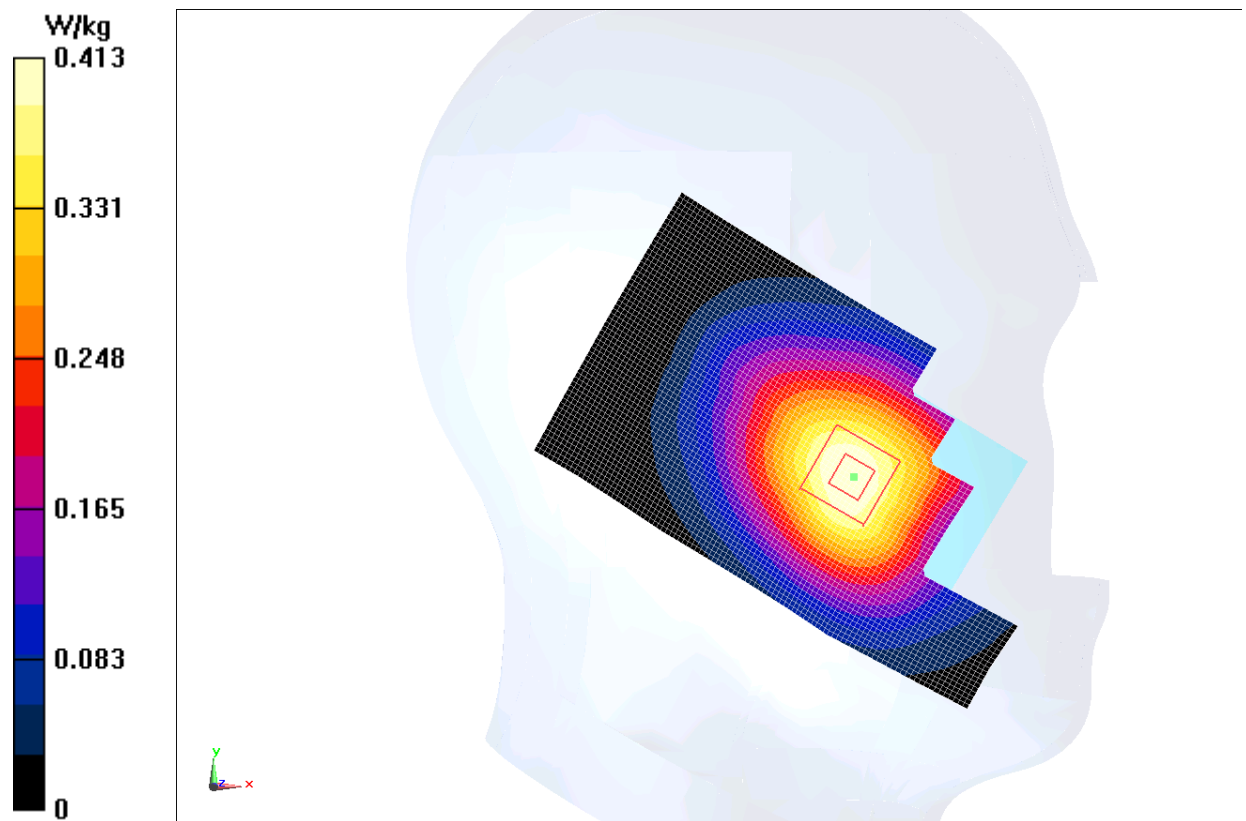


Fig. 3 850 MHz CH128

### 850 Left Tilt High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 40.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 12.512 V/m; Power Drift = 0.10 dB

**Fast SAR: SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (interpolated) = 0.344 W/kg

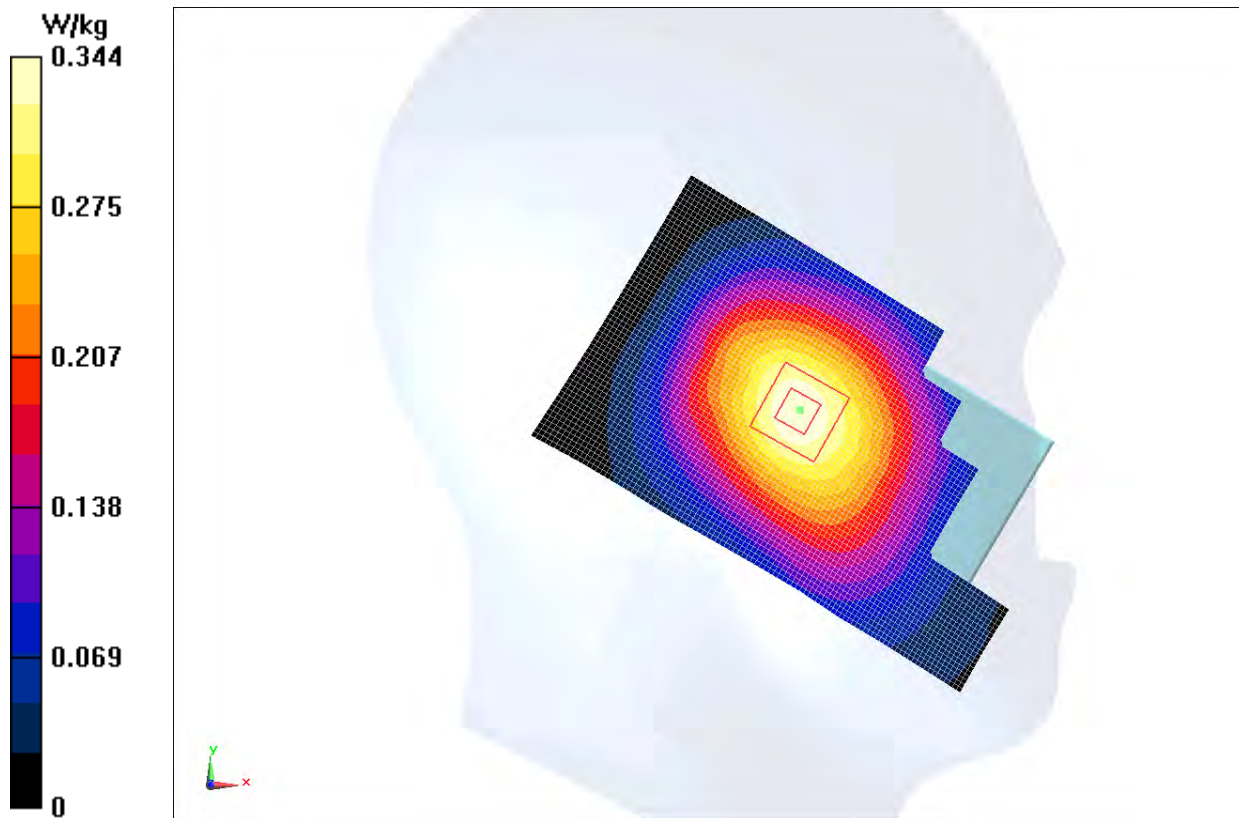


Fig.4 850 MHz CH251

### 850 Left Tilt Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 11.392 V/m; Power Drift = 0.02 dB

**Fast SAR: SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (interpolated) = 0.277 W/kg

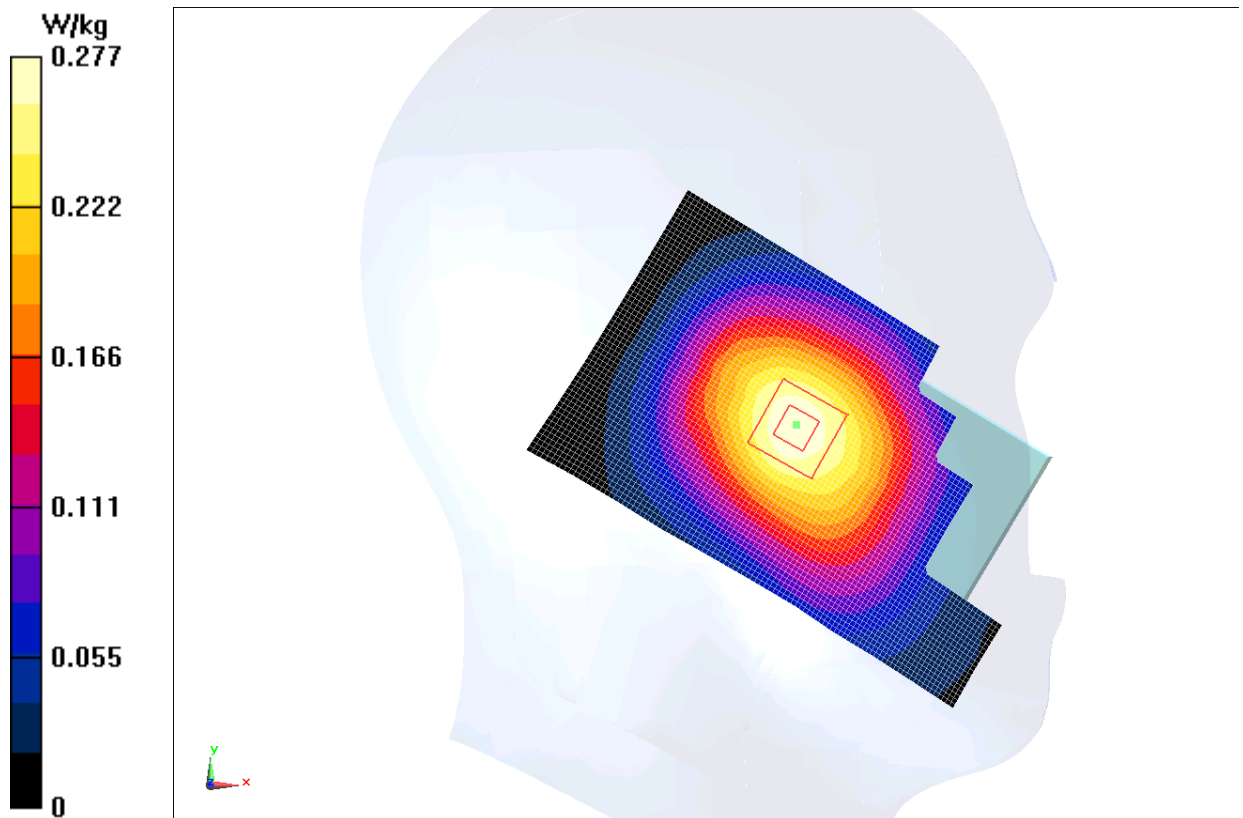


Fig.5 850 MHz CH190

### 850 Left Tilt Low

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.872 \text{ mho/m}$ ;  $\epsilon_r = 40.945$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.4^\circ\text{C}$       Liquid Temperature:  $21.9^\circ\text{C}$

Communication System: GSM 850 Frequency:  $824.2 \text{ MHz}$  Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid:  $dx=10 \text{ mm}$ ,  $dy=10 \text{ mm}$

Reference Value =  $10.907 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

**Fast SAR: SAR(1 g) =  $0.230 \text{ W/kg}$ ; SAR(10 g) =  $0.159 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $0.246 \text{ W/kg}$

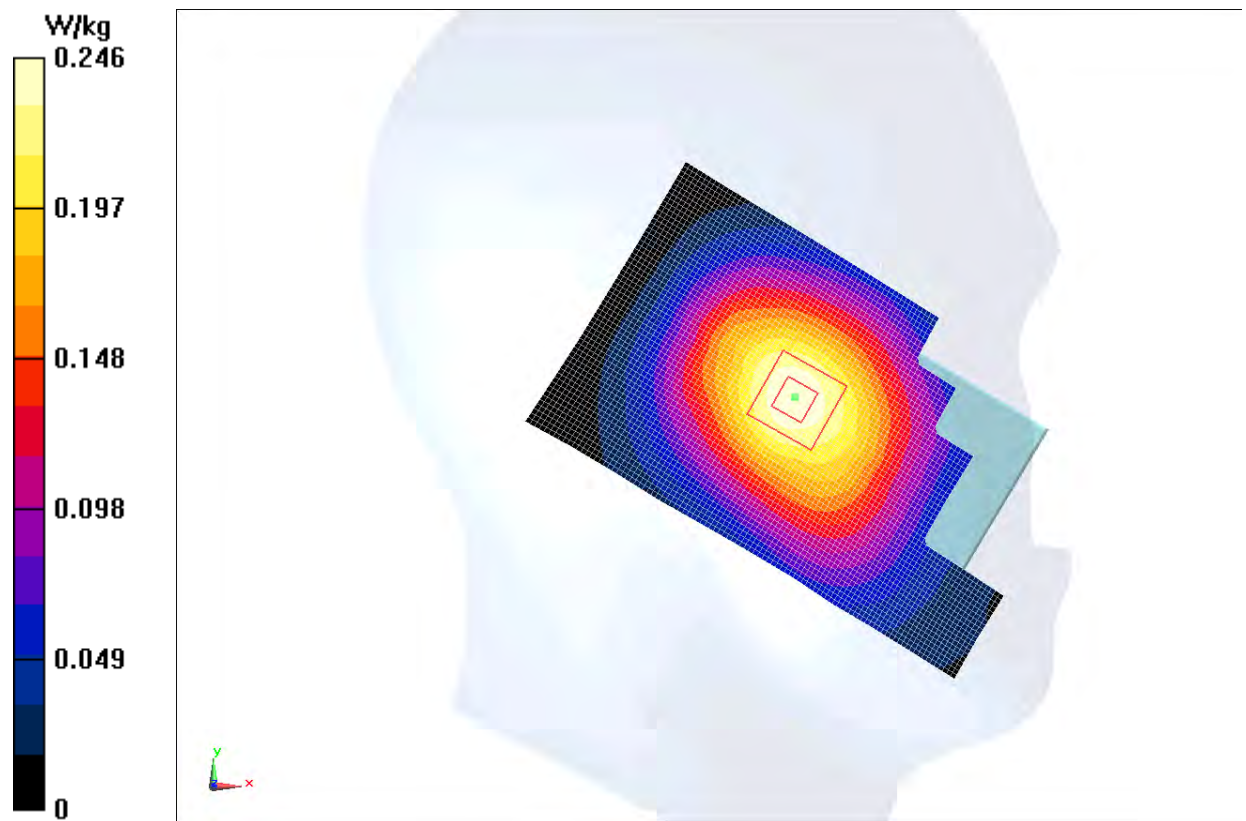


Fig. 6 850 MHz CH128

### 850 Right Cheek High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 40.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.536 W/kg

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.194 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.649 W/kg

**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.375 W/kg**

Maximum value of SAR (measured) = 0.527 W/kg

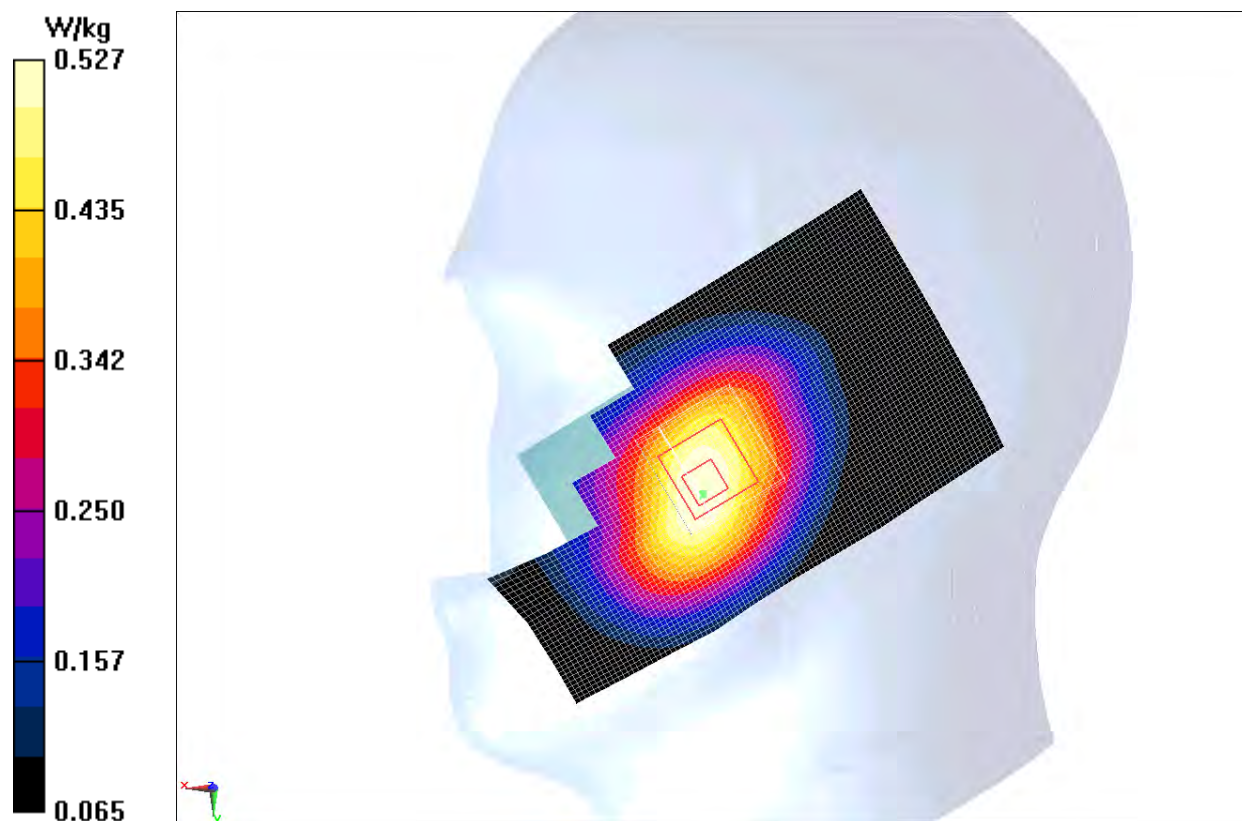


Fig. 7 850 MHz CH251



### 850 Right Cheek Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.702 V/m; Power Drift = -0.14 dB

**Fast SAR: SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.294 W/kg**

Maximum value of SAR (interpolated) = 0.459 W/kg

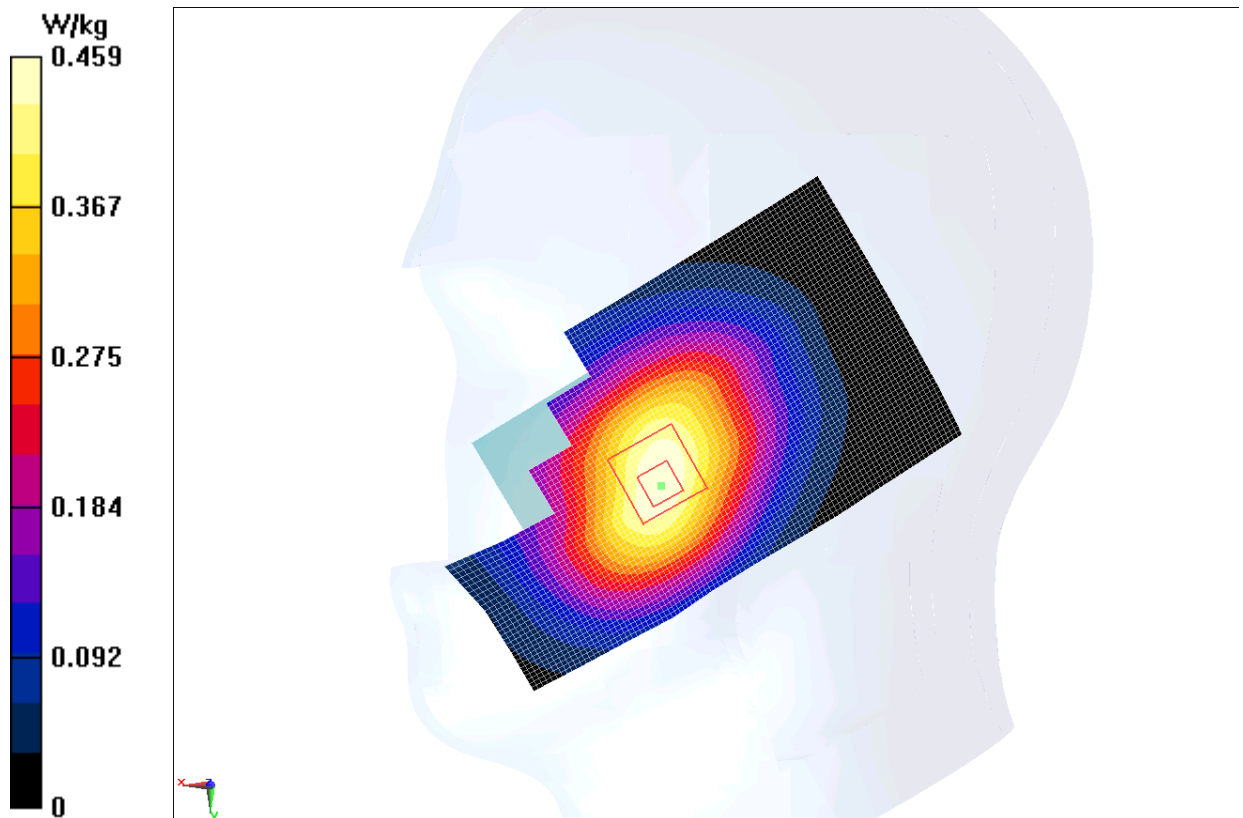


Fig. 8 850 MHz CH190

**850 Right Cheek Low**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.872$  mho/m;  $\epsilon_r = 40.945$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042


Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.357 V/m; Power Drift = 0.02 dB

**Fast SAR: SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.255 W/kg**

Maximum value of SAR (interpolated) = 0.398 W/kg

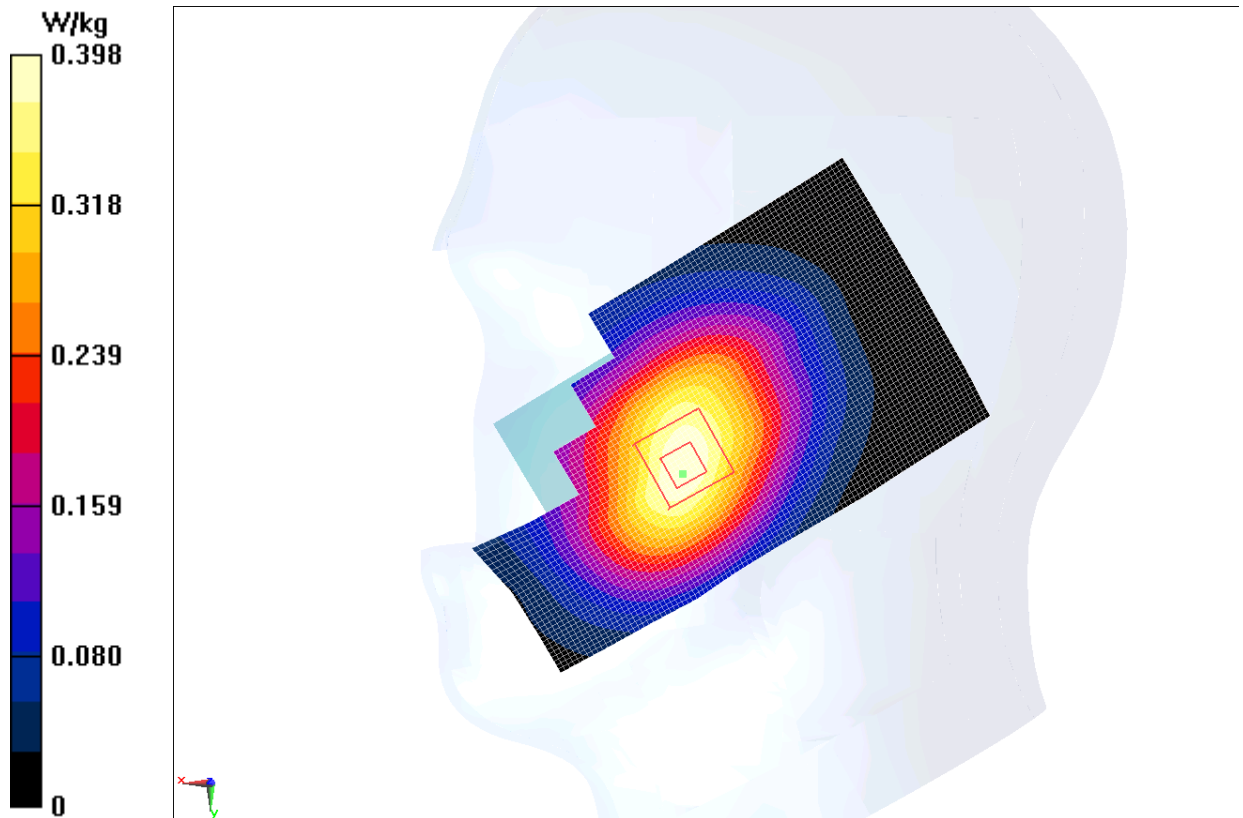

**Fig. 9 850 MHz CH128**

### 850 Right Tilt High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.895$  mho/m;  $\epsilon_r = 40.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 12.881 V/m; Power Drift = 0.07 dB

**Fast SAR: SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.213 W/kg**

Maximum value of SAR (interpolated) = 0.334 W/kg

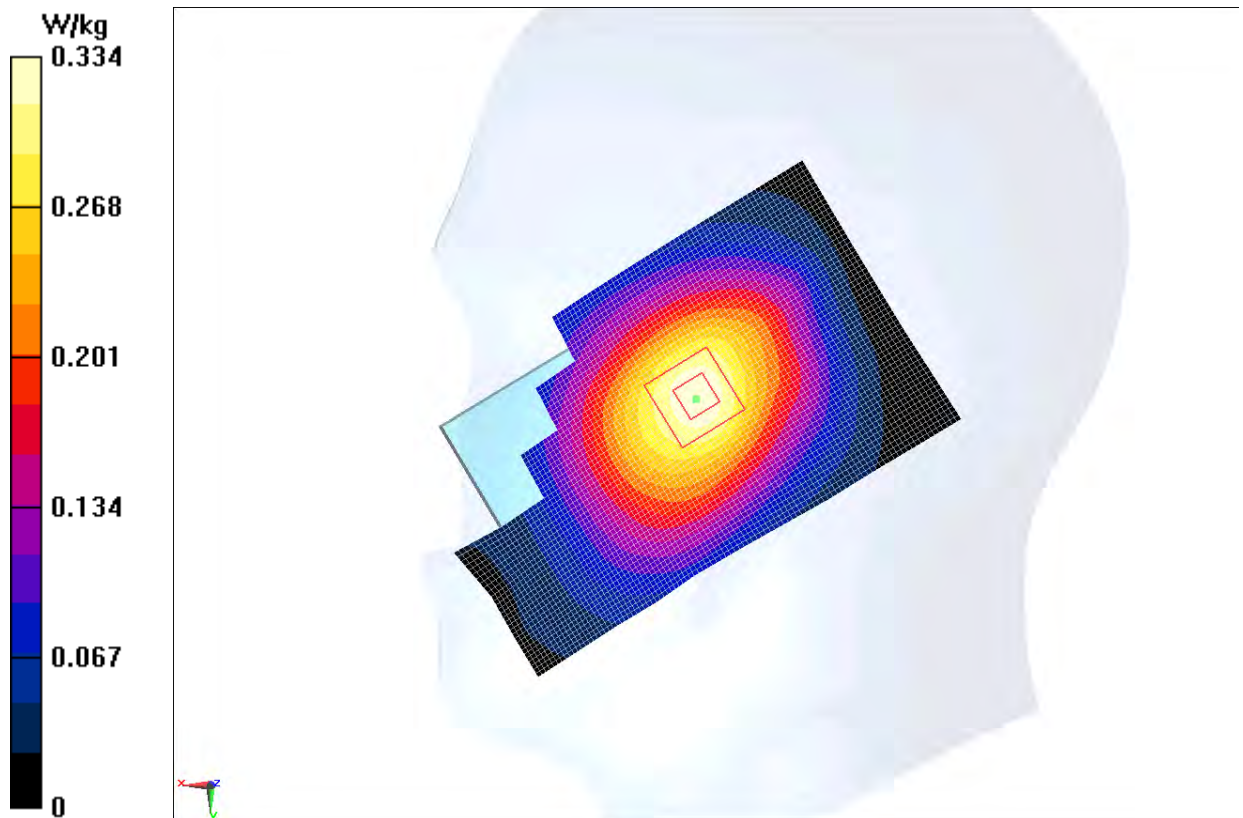


Fig.10 850 MHz CH251

### 850 Right Tilt Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.805$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 11.516 V/m; Power Drift = 0.10 dB

**Fast SAR: SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (interpolated) = 0.277 W/kg

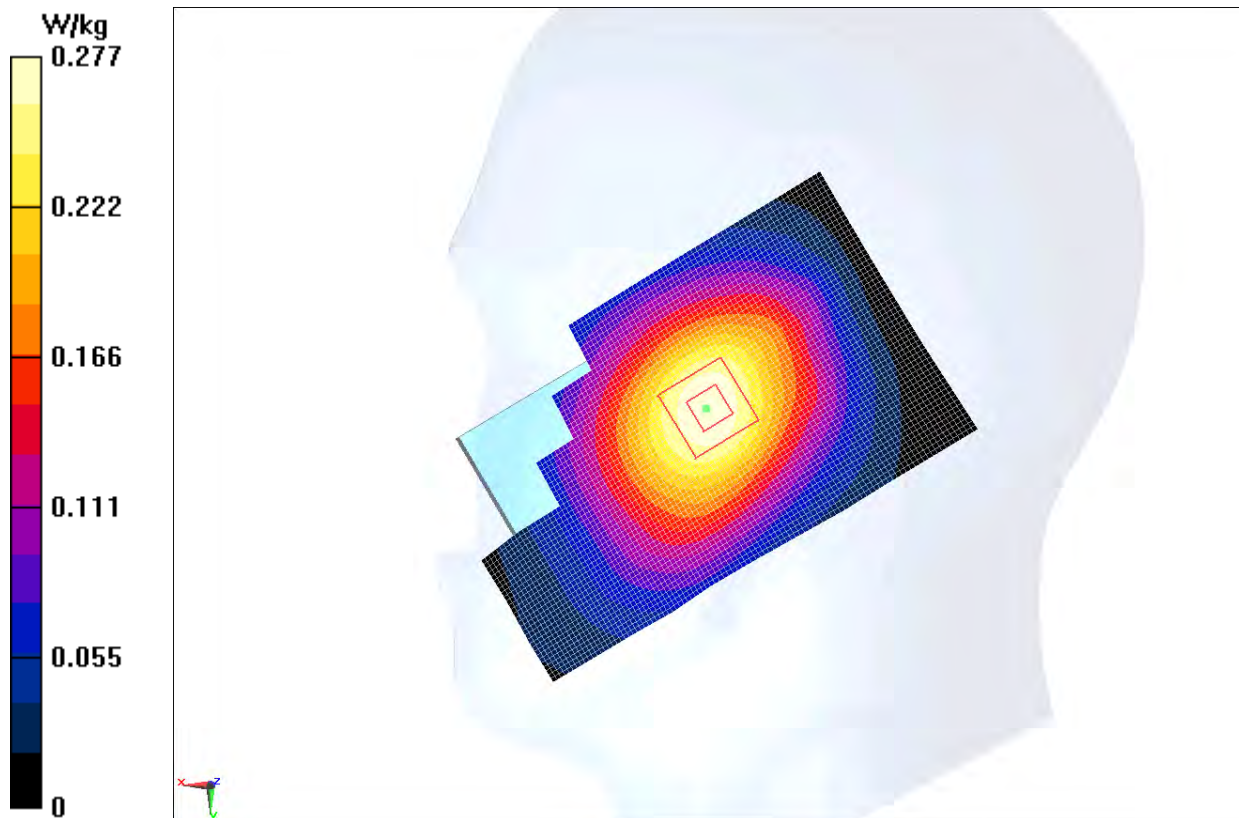


Fig.11 850 MHz CH190

### 850 Right Tilt Low

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.872$  mho/m;  $\epsilon_r = 40.945$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 11.003 V/m; Power Drift = 0.06 dB

**Fast SAR: SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (interpolated) = 0.245 W/kg

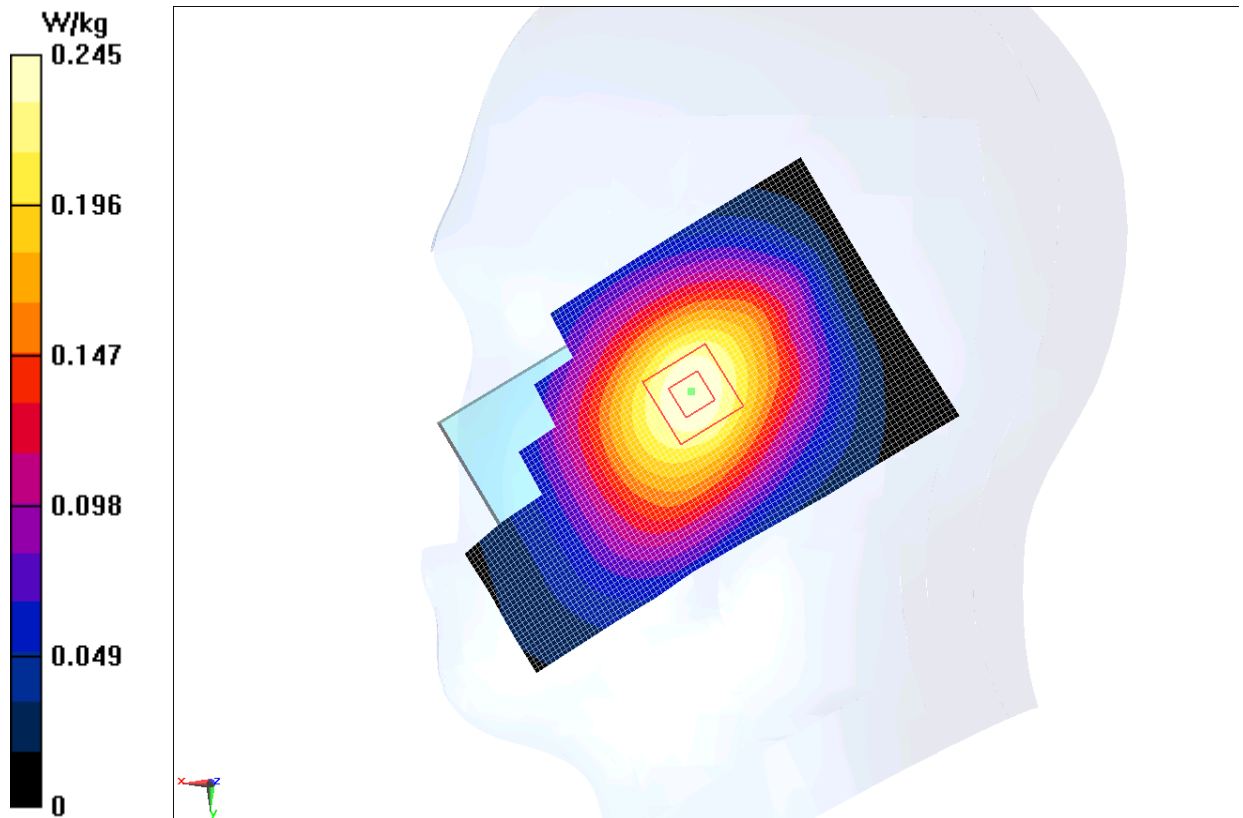


Fig. 12 850 MHz CH128

### 850 Body Toward Phantom Middle with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Phantom Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.649 W/kg

**Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.904 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.452 W/kg**

Maximum value of SAR (measured) = 0.651 W/kg

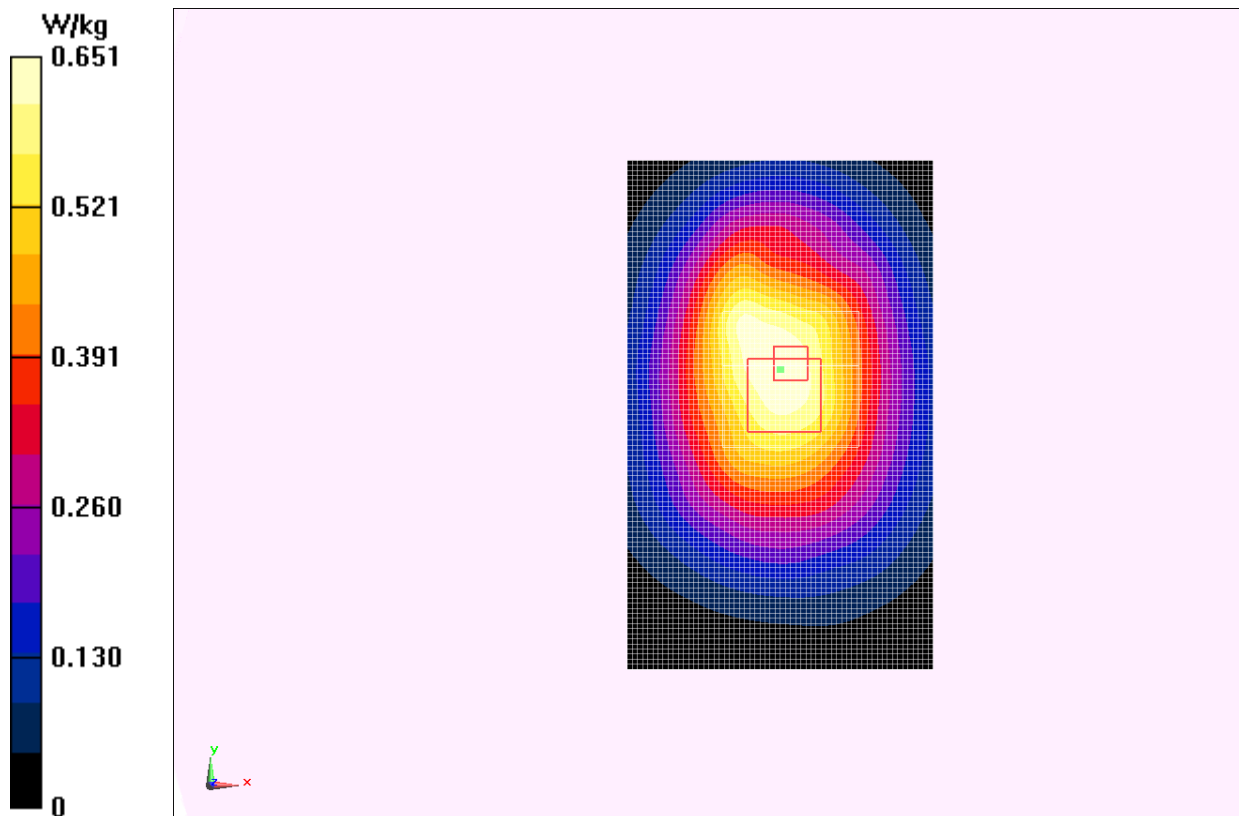


Fig. 13 850 MHz CH190

### 850 Body Toward Ground High with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.003$  mho/m;  $\epsilon_r = 55.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.359 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.723 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg


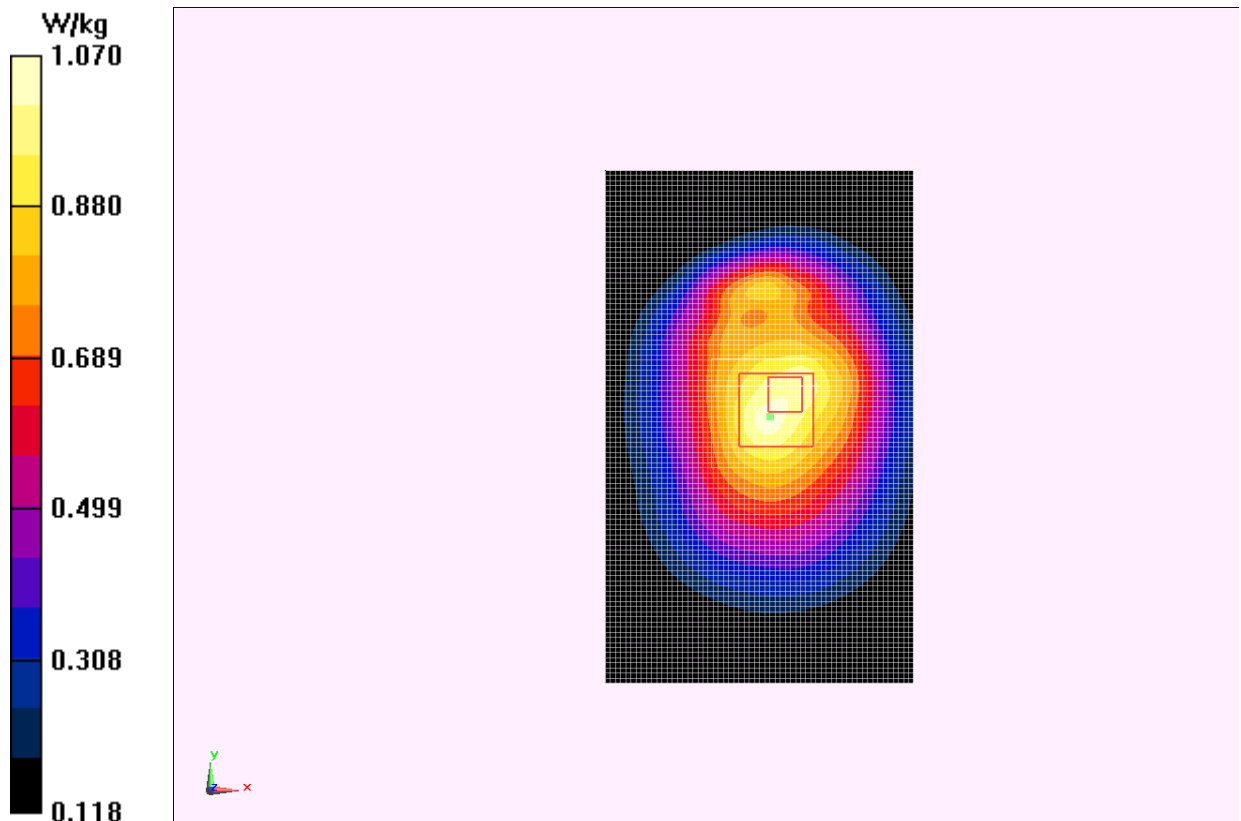


Fig. 14 850 MHz CH251



**Fig. 14-1 Z-Scan at power reference point (850 MHz CH251)**

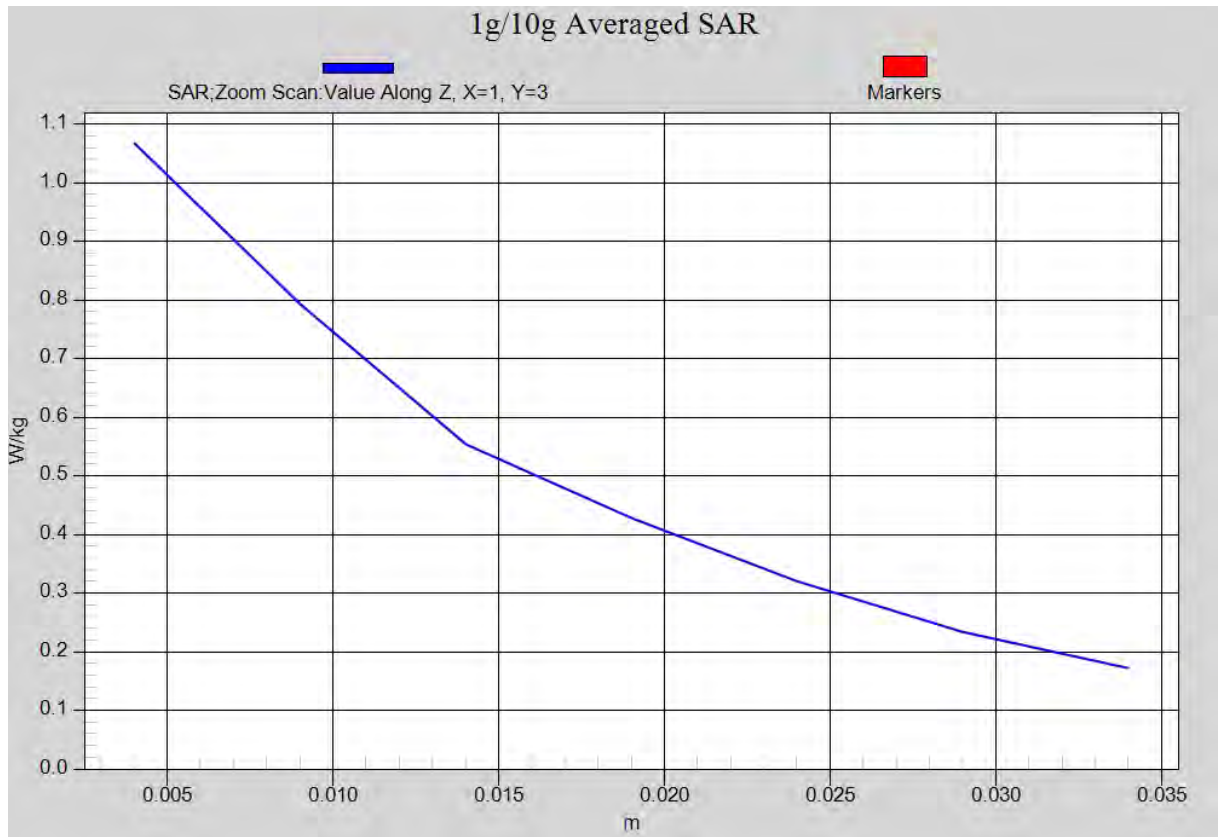

### 850 Body Toward Ground Middle with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 30.910 V/m; Power Drift = -0.11 dB

**Fast SAR: SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.618 W/kg**

Maximum value of SAR (interpolated) = 0.950 W/kg

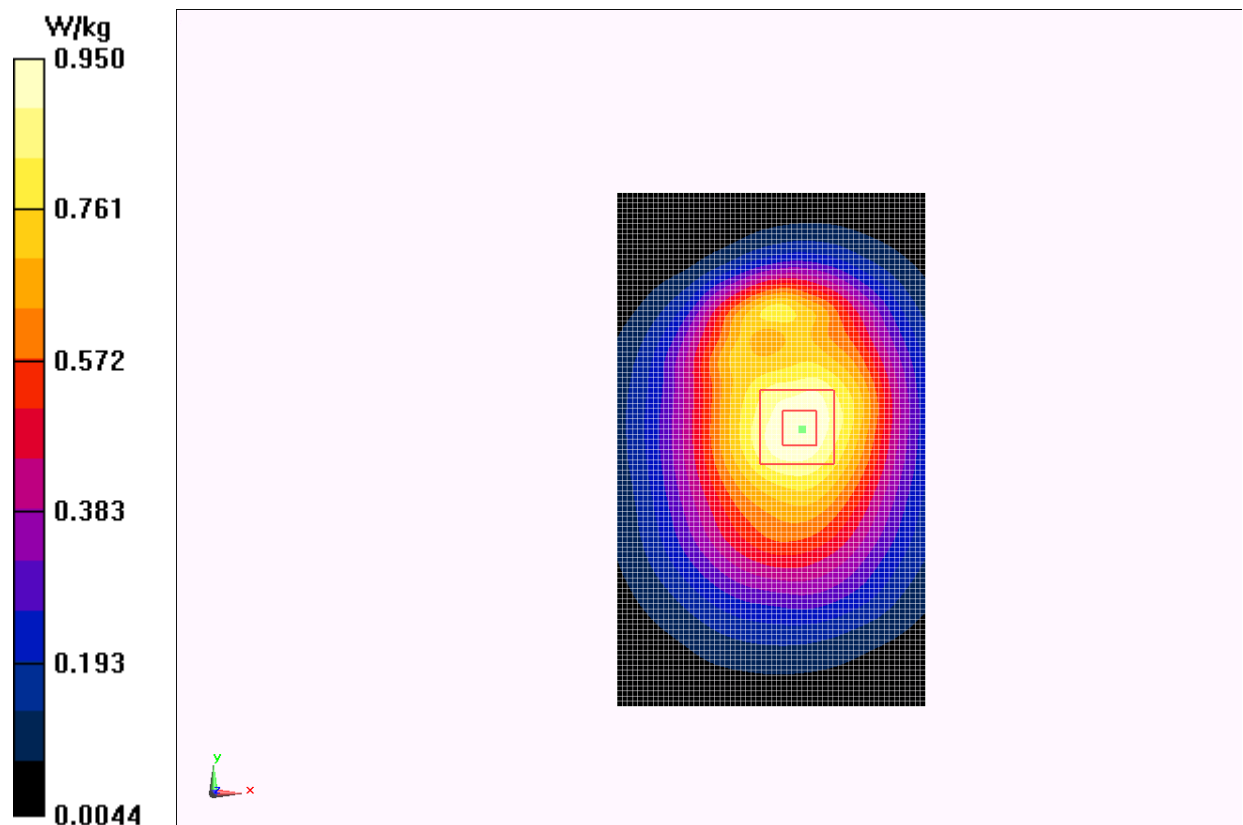


Fig. 15 850 MHz CH190

### 850 Body Toward Ground Low with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.977$  mho/m;  $\epsilon_r = 55.694$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 30.135 V/m; Power Drift = -0.02 dB

**Fast SAR: SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.571 W/kg**

Maximum value of SAR (interpolated) = 0.912 W/kg

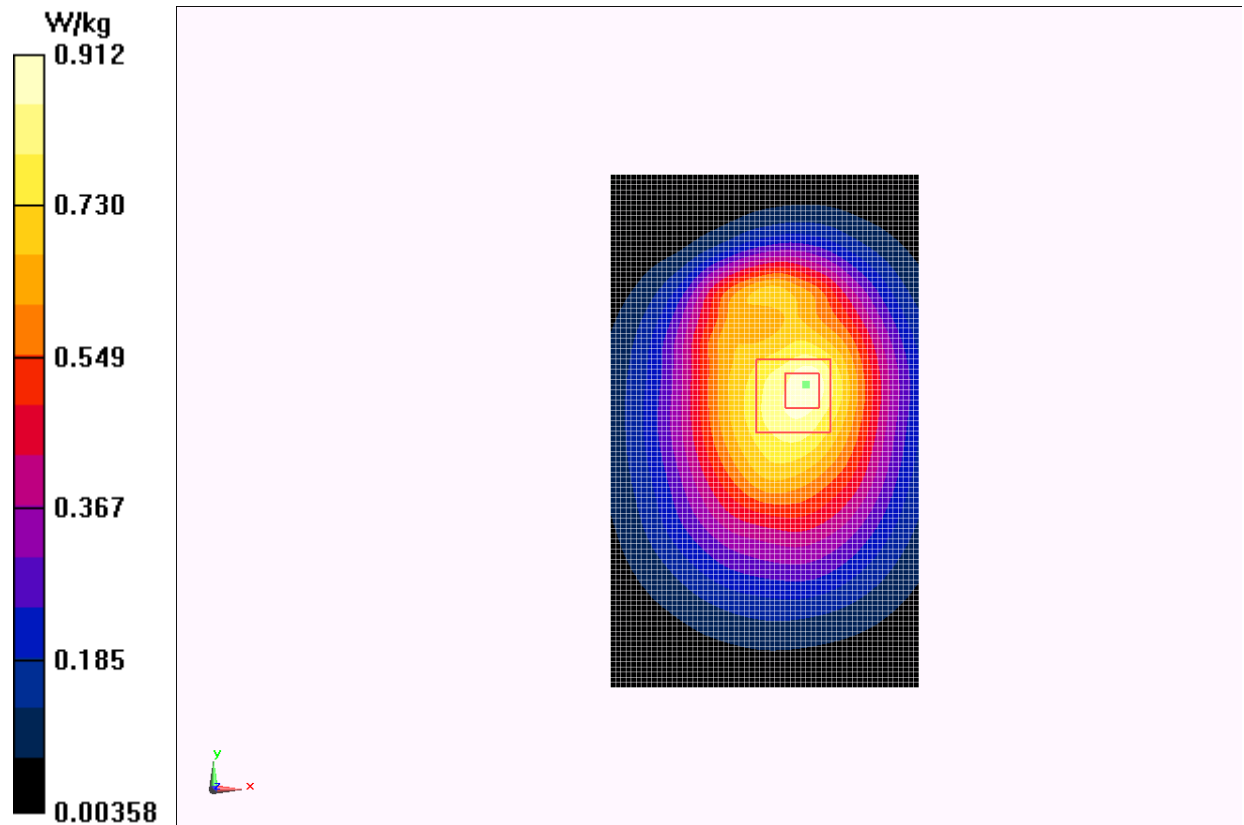


Fig. 16 850 MHz CH128

### 850 Body Left Side Middle with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Left Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.605 W/kg

**Left Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.951 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.851 W/kg

**SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.407 W/kg**

Maximum value of SAR (measured) = 0.626 W/kg

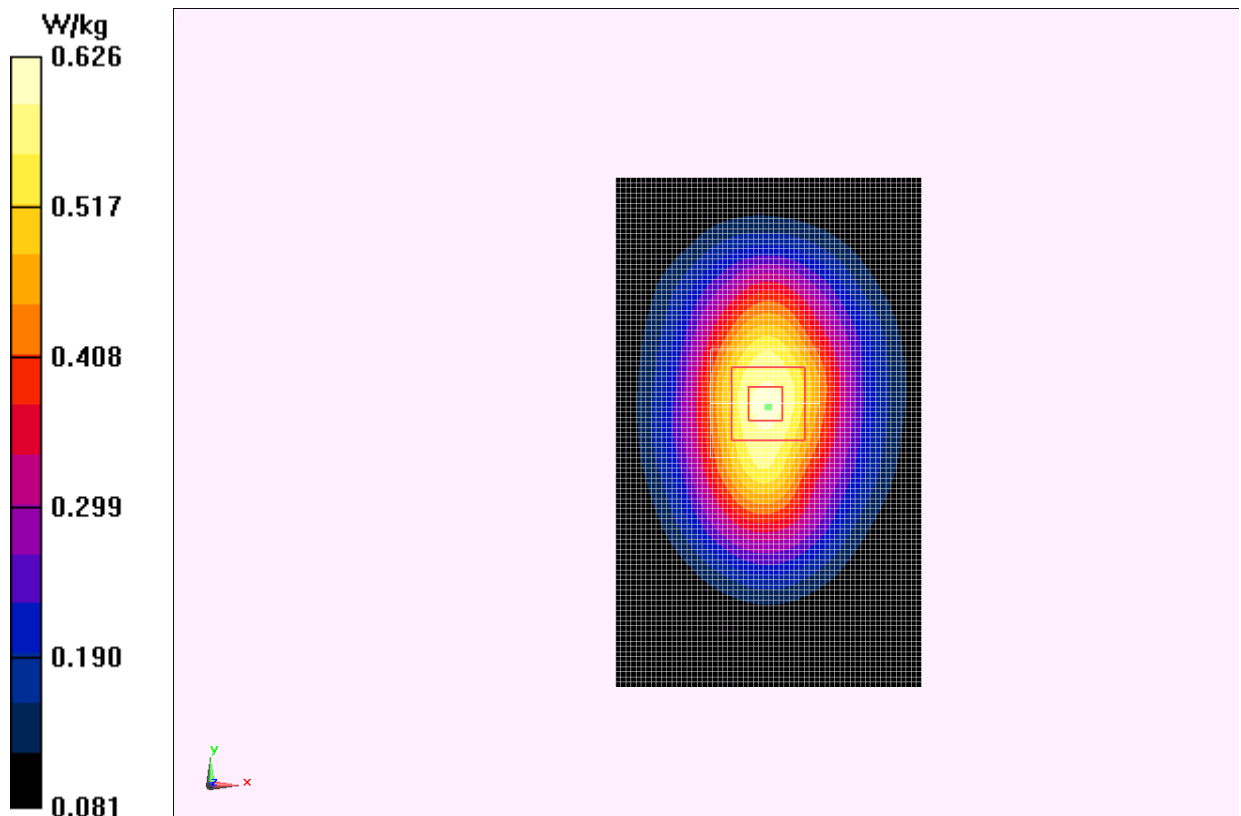


Fig. 17 850 MHz CH190

### 850 Body Right Side Middle with GPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Right Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.518 W/kg

**Right Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.184 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.665 W/kg

**SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.331 W/kg**

Maximum value of SAR (measured) = 0.531 W/kg

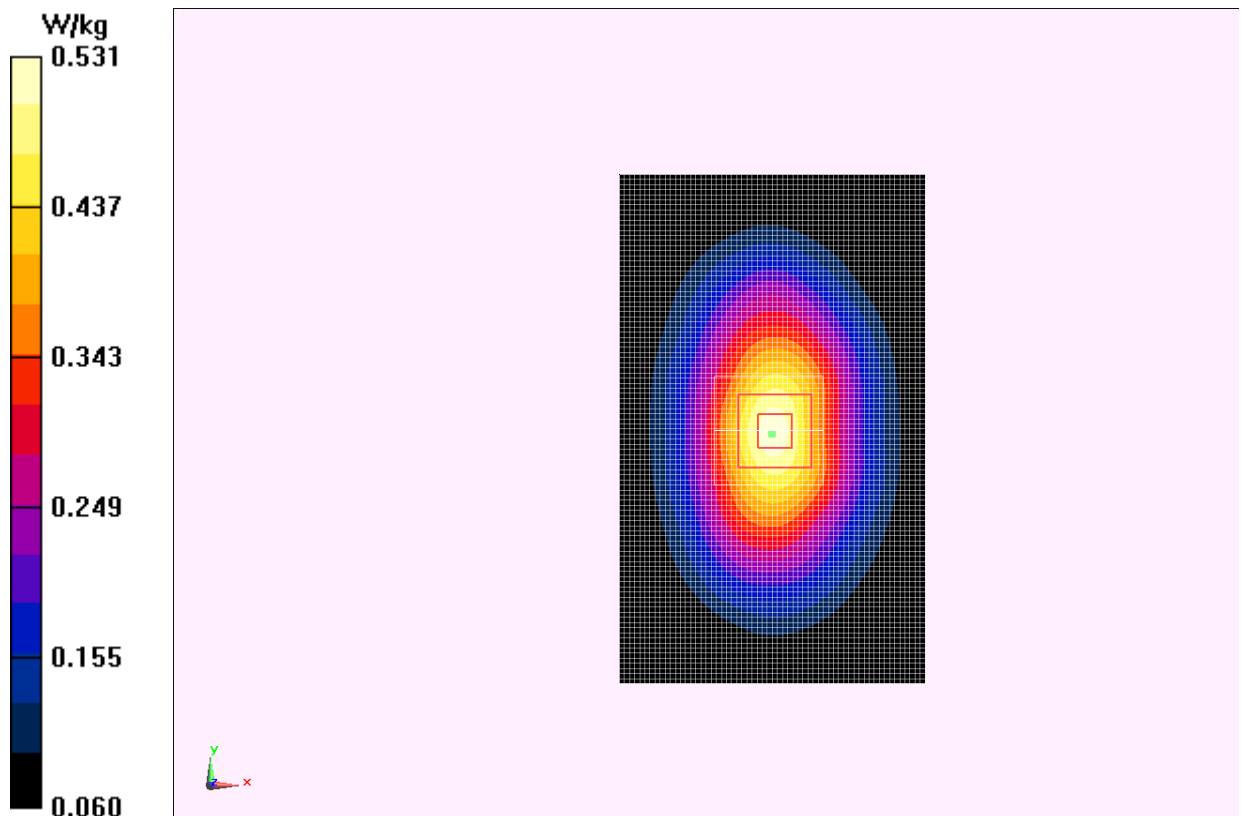


Fig. 18 850 MHz CH190

**850 Body Bottom Side Middle with GPRS**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Bottom Side Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0949 W/kg


**Bottom Side Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.969 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.0952 W/kg

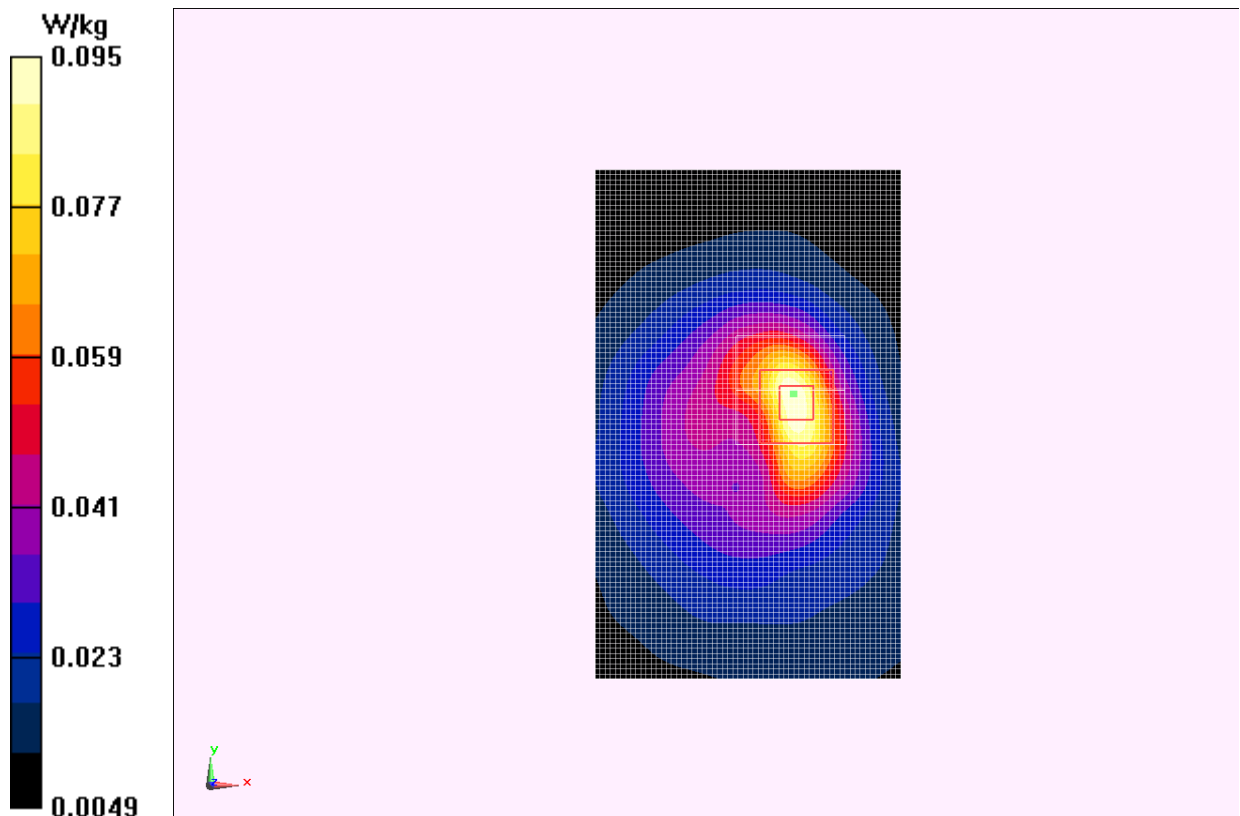

**Fig. 19 850 MHz CH190**

### 850 Body Toward Ground High with EGPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.003$  mho/m;  $\epsilon_r = 55.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 EGPRS Frequency: 848.8 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 32.727 V/m; Power Drift = -0.10 dB

**Fast SAR: SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.651 W/kg**

Maximum value of SAR (interpolated) = 1.01 W/kg

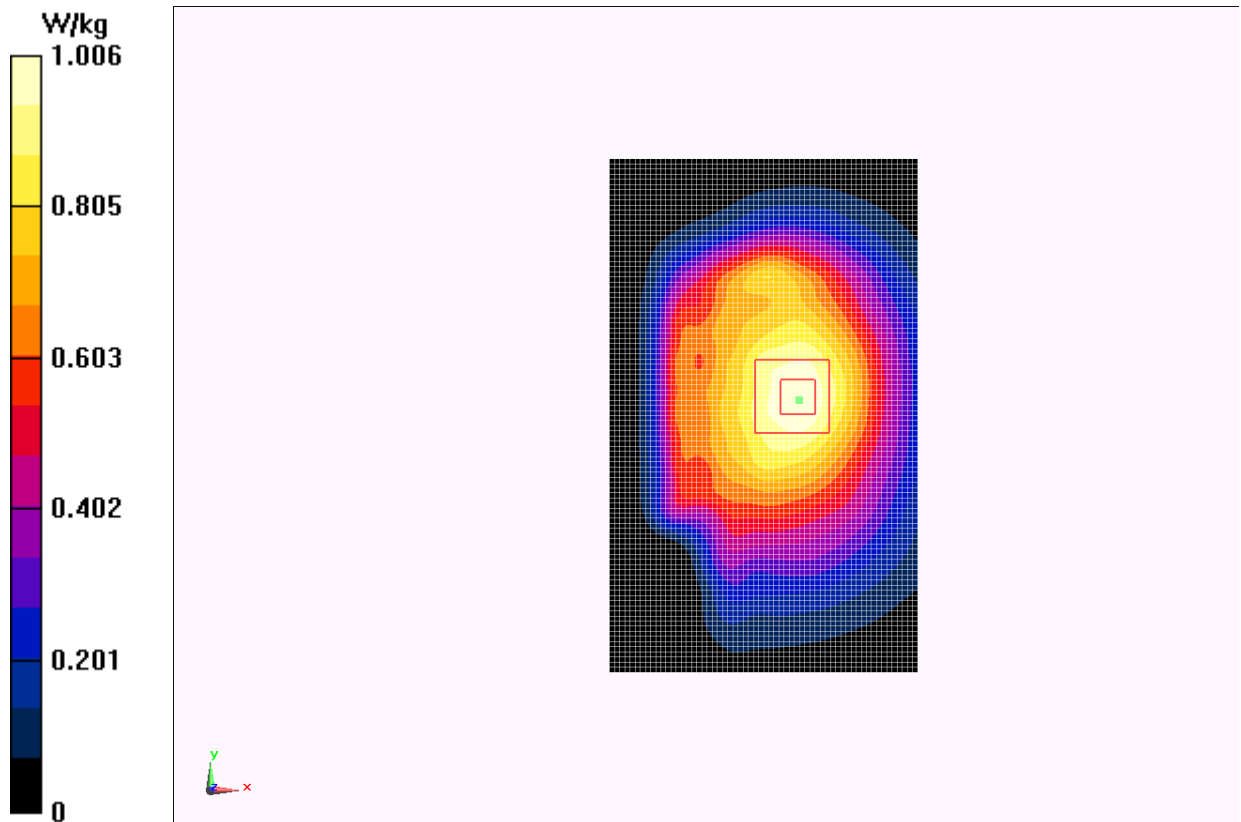


Fig. 20 850 MHz CH251

### 850 Body Toward Ground Middle with EGPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.567$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 EGPRS Frequency: 836.6 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 20.783 V/m; Power Drift = 0.05 dB

**Fast SAR: SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.618 W/kg**

Maximum value of SAR (interpolated) = 0.949 W/kg

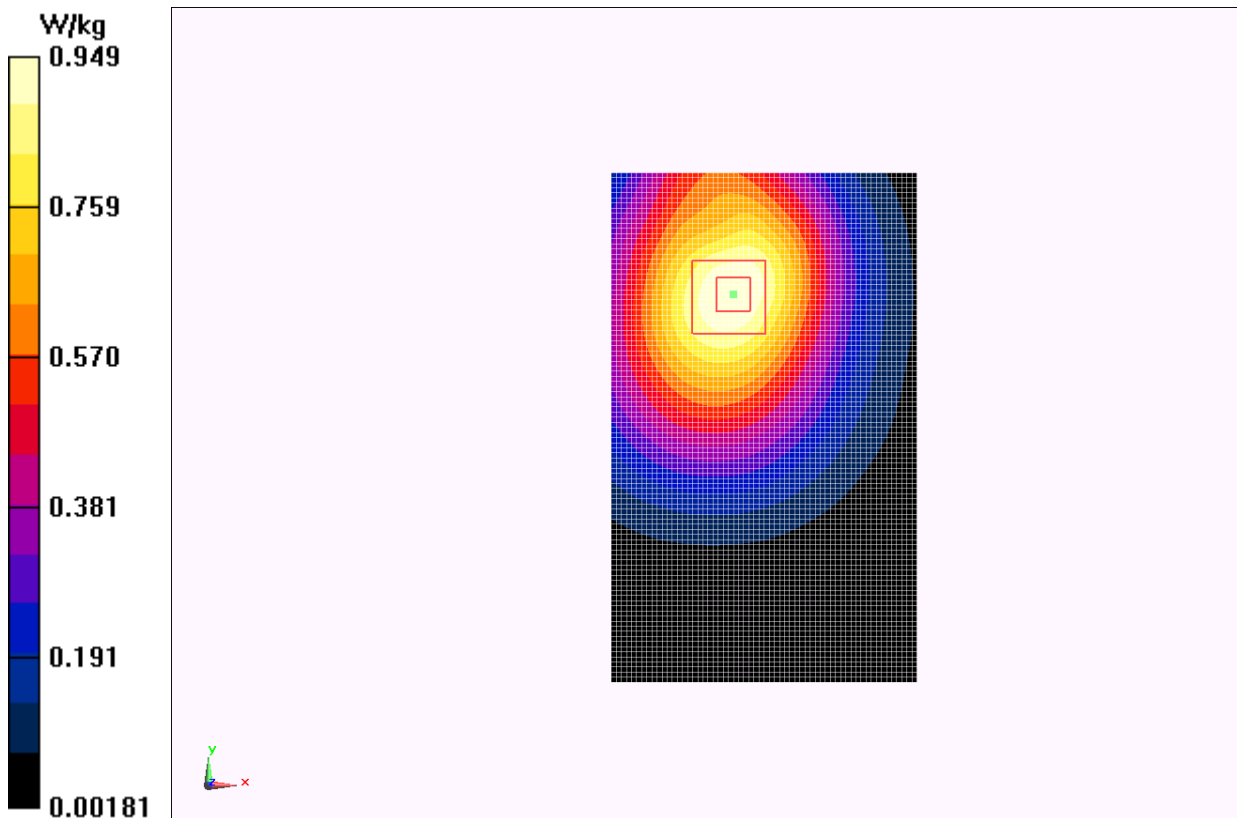


Fig. 21 850 MHz CH190

### 850 Body Toward Ground Low with EGPRS

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.977$  mho/m;  $\epsilon_r = 55.694$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 EGPRS Frequency: 824.2 MHz Duty Cycle: 1:2.67

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 19.130 V/m; Power Drift = 0.09 dB

**Fast SAR: SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.544 W/kg**

Maximum value of SAR (interpolated) = 0.838 W/kg

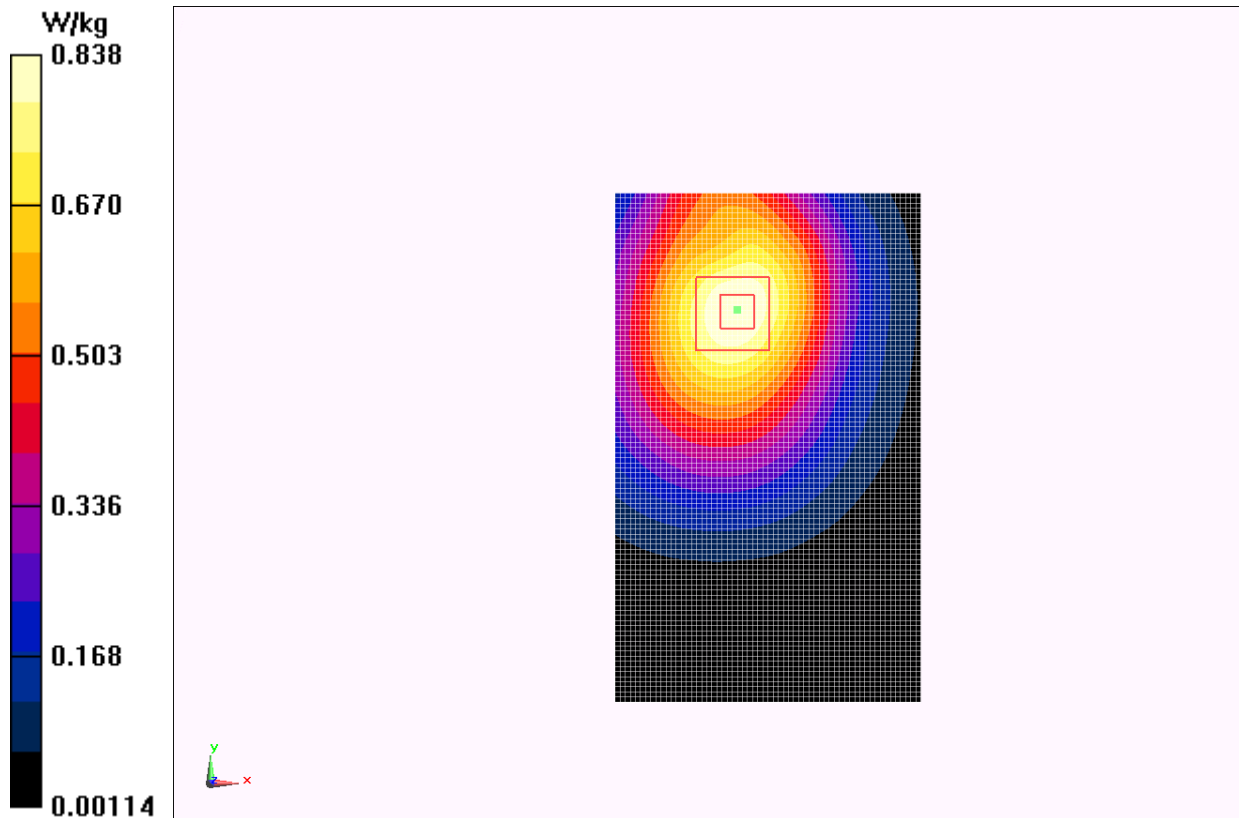


Fig. 22 850 MHz CH128



### 850 Body Toward Ground High with Headset CCB3160A11C2

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.003$  mho/m;  $\epsilon_r = 55.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 23.568 V/m; Power Drift = -0.00 dB

**Fast SAR: SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.536 W/kg**

Maximum value of SAR (interpolated) = 0.824 W/kg

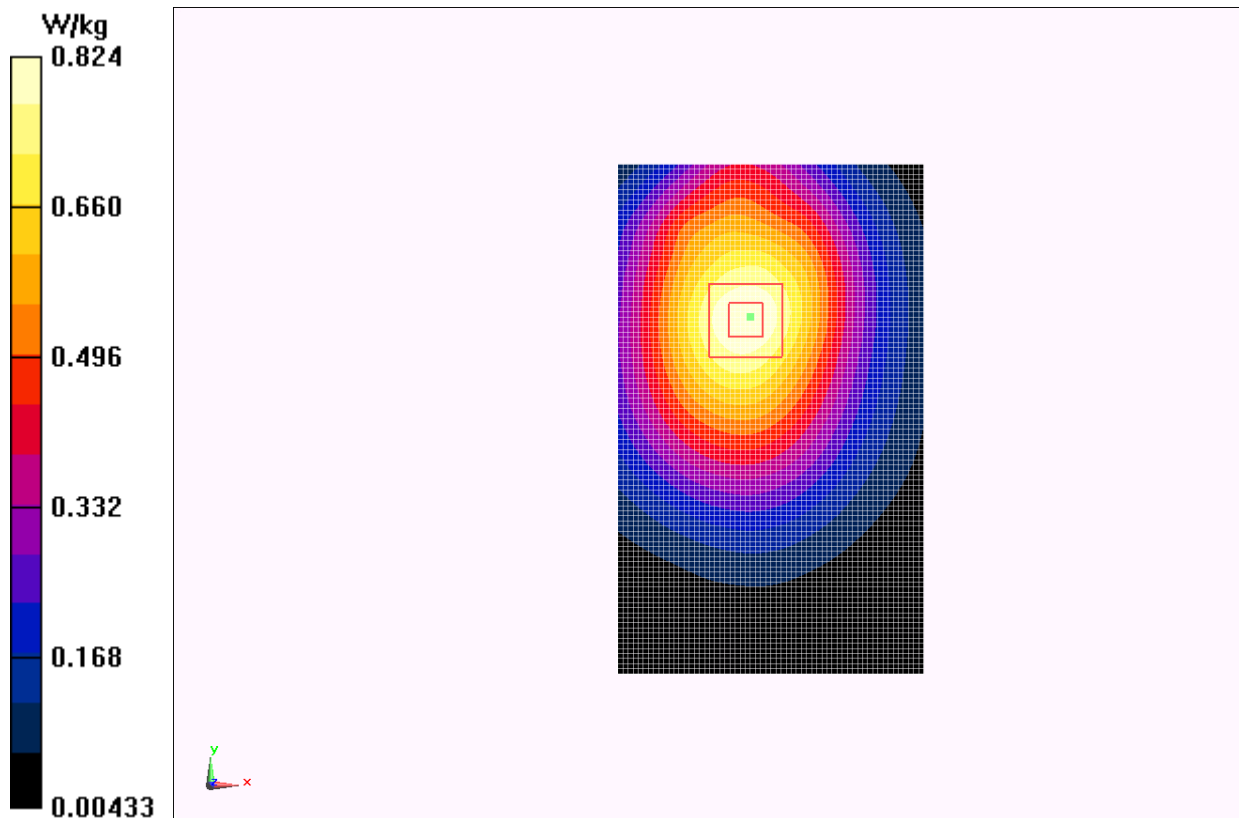


Fig. 23 850 MHz CH251

**850 Body Toward Ground High with Headset CCB3160A11C4**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.003$  mho/m;  $\epsilon_r = 55.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

**Toward Ground High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 14.651 V/m; Power Drift = -0.08 dB

**Fast SAR: SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (interpolated) = 0.400 W/kg

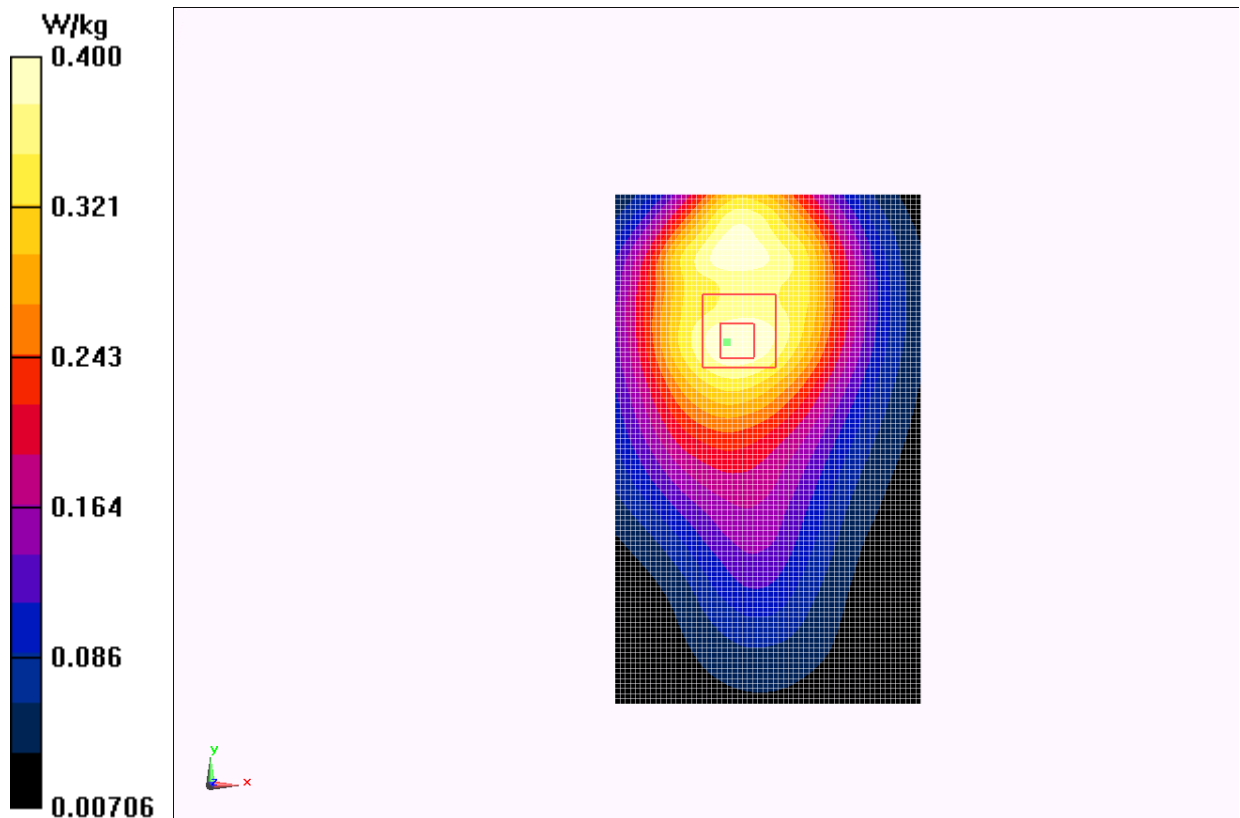


Fig. 24 850 MHz CH251

### 1900 Left Cheek High

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.419$  mho/m;  $\epsilon_r = 39.336$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek High/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.684 V/m; Power Drift = 0.15 dB

**Fast SAR: SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.175 mW/g**

Maximum value of SAR (interpolated) = 0.324 mW/g

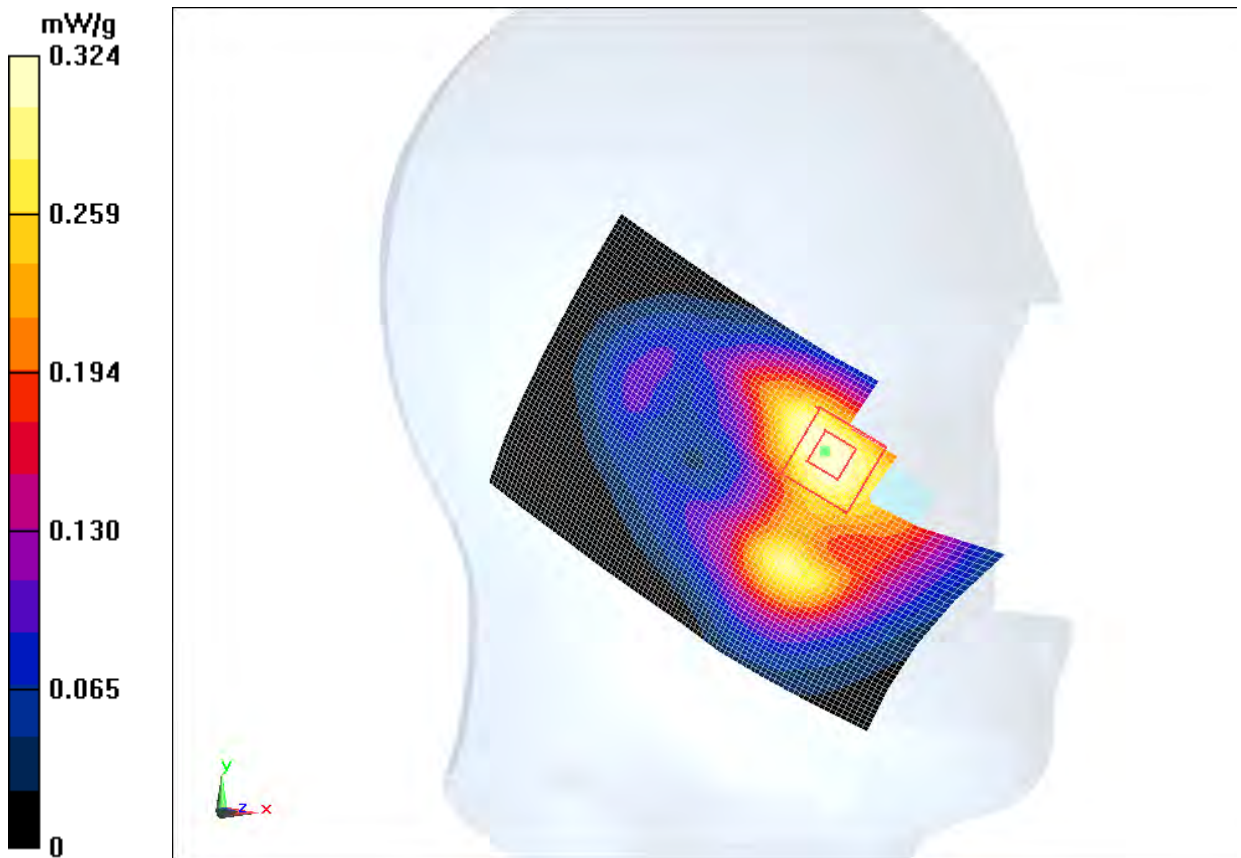


Fig. 25 1900 MHz CH810

**1900 Left Cheek Middle**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head GSM1900

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.391$  mho/m;  $\epsilon_r = 39.448$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Middle/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.979 V/m; Power Drift = -0.04 dB

**Fast SAR: SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.163 mW/g**

Maximum value of SAR (interpolated) = 0.316 mW/g

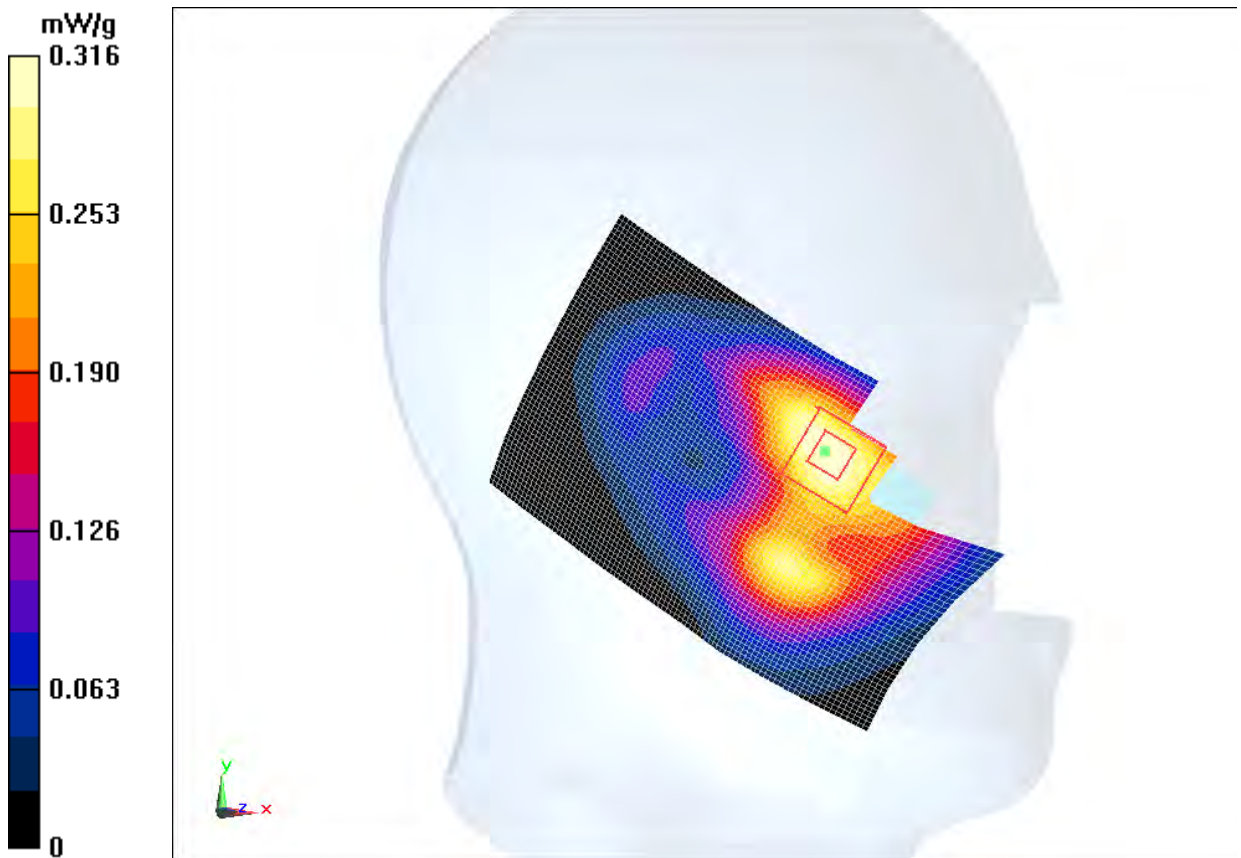


Fig. 26 1900 MHz CH661

**1900 Left Cheek Low**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.361$  mho/m;  $\epsilon_r = 39.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3


Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Low/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.677 V/m; Power Drift = 0.12 dB

**Fast SAR: SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.158 mW/g**

Maximum value of SAR (interpolated) = 0.326 mW/g

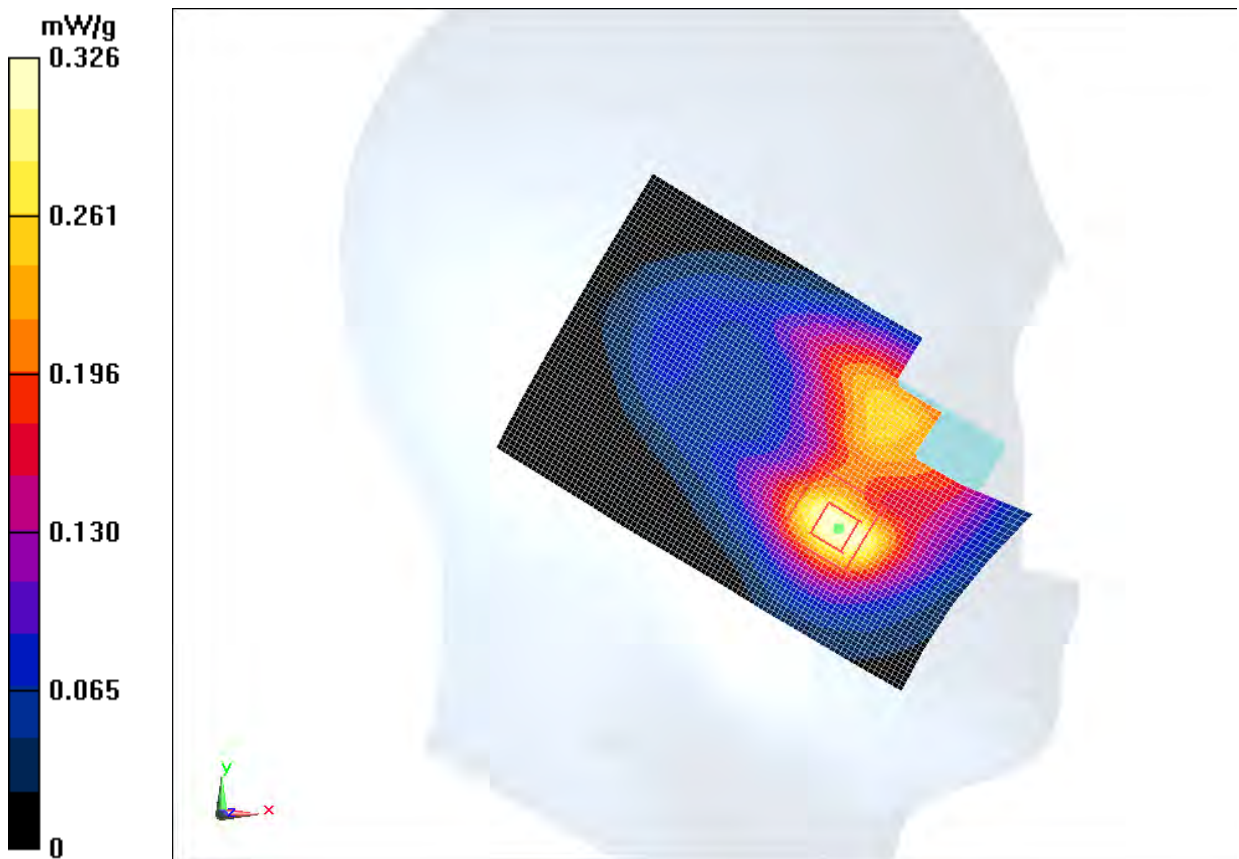

**Fig. 27 1900 MHz CH512**

**1900 Left Tilt High**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.419$  mho/m;  $\epsilon_r = 39.336$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3


Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt High/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 9.304 V/m; Power Drift = 0.15 dB

**Fast SAR: SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.089 mW/g**

Maximum value of SAR (interpolated) = 0.179 mW/g

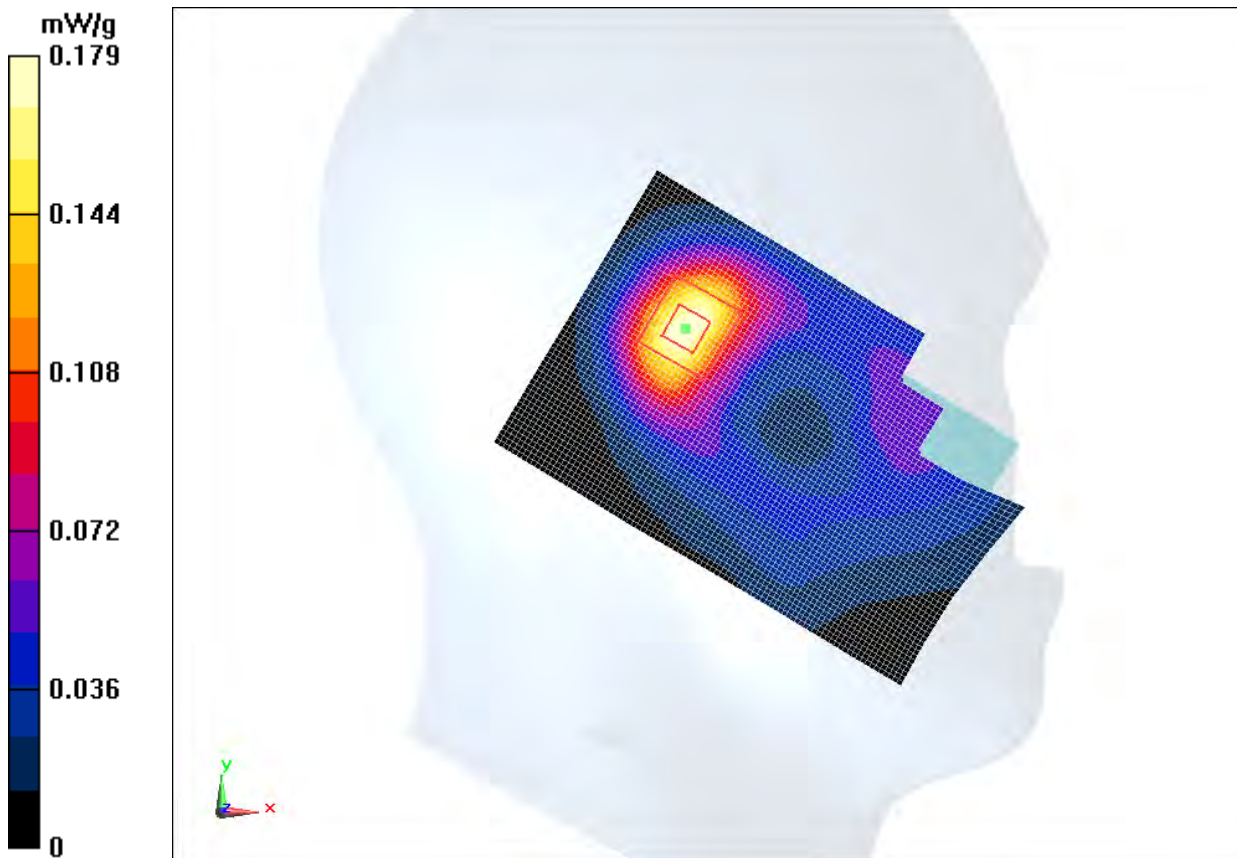

**Fig. 28 1900 MHz CH810**

**1900 Left Tilt Middle**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.391$  mho/m;  $\epsilon_r = 39.448$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Middle/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 9.764 V/m; Power Drift = 0.03 dB

**Fast SAR: SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.090 mW/g**

Maximum value of SAR (interpolated) = 0.181 mW/g

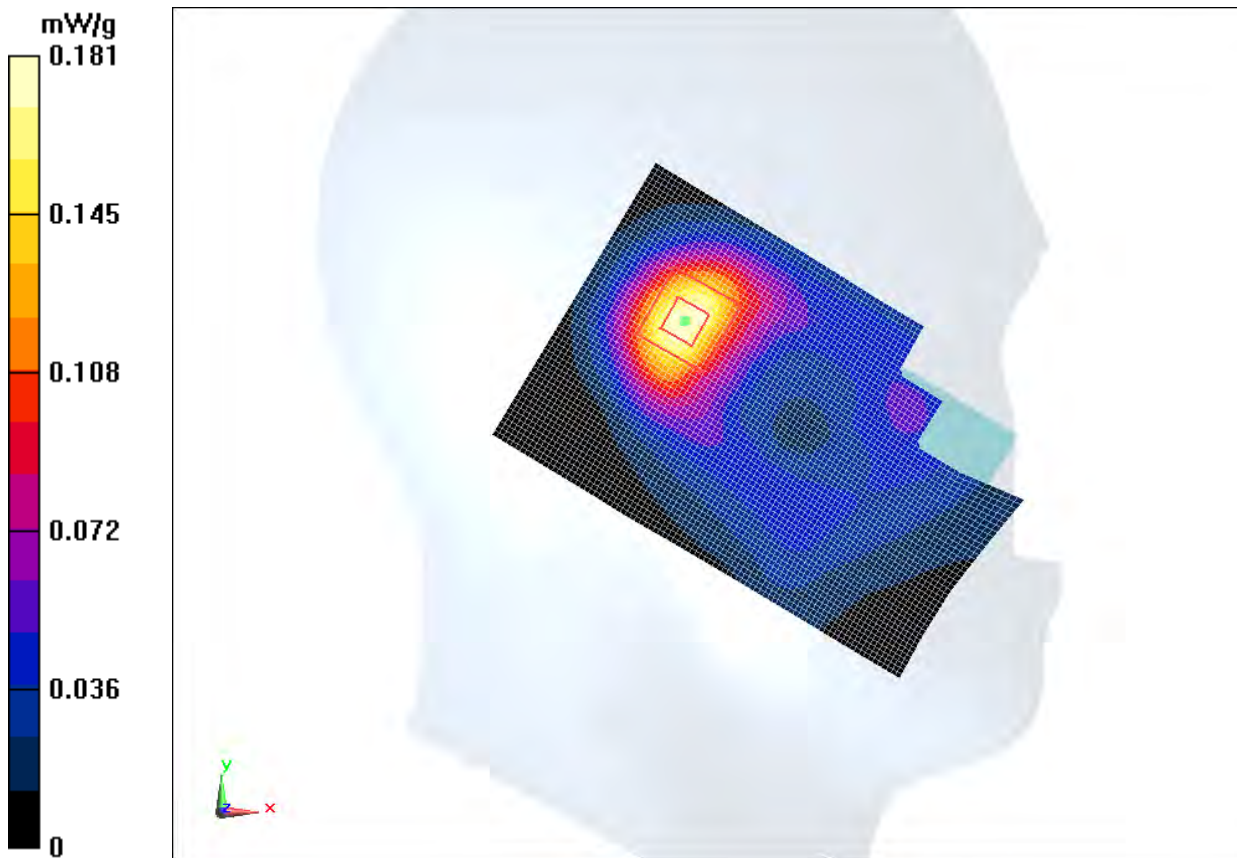


Fig. 29 1900 MHz CH661

### 1900 Left Tilt Low

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.361$  mho/m;  $\epsilon_r = 39.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Low/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 9.434 V/m; Power Drift = -0.02 dB

**Fast SAR: SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.079 mW/g**

Maximum value of SAR (interpolated) = 0.157 mW/g

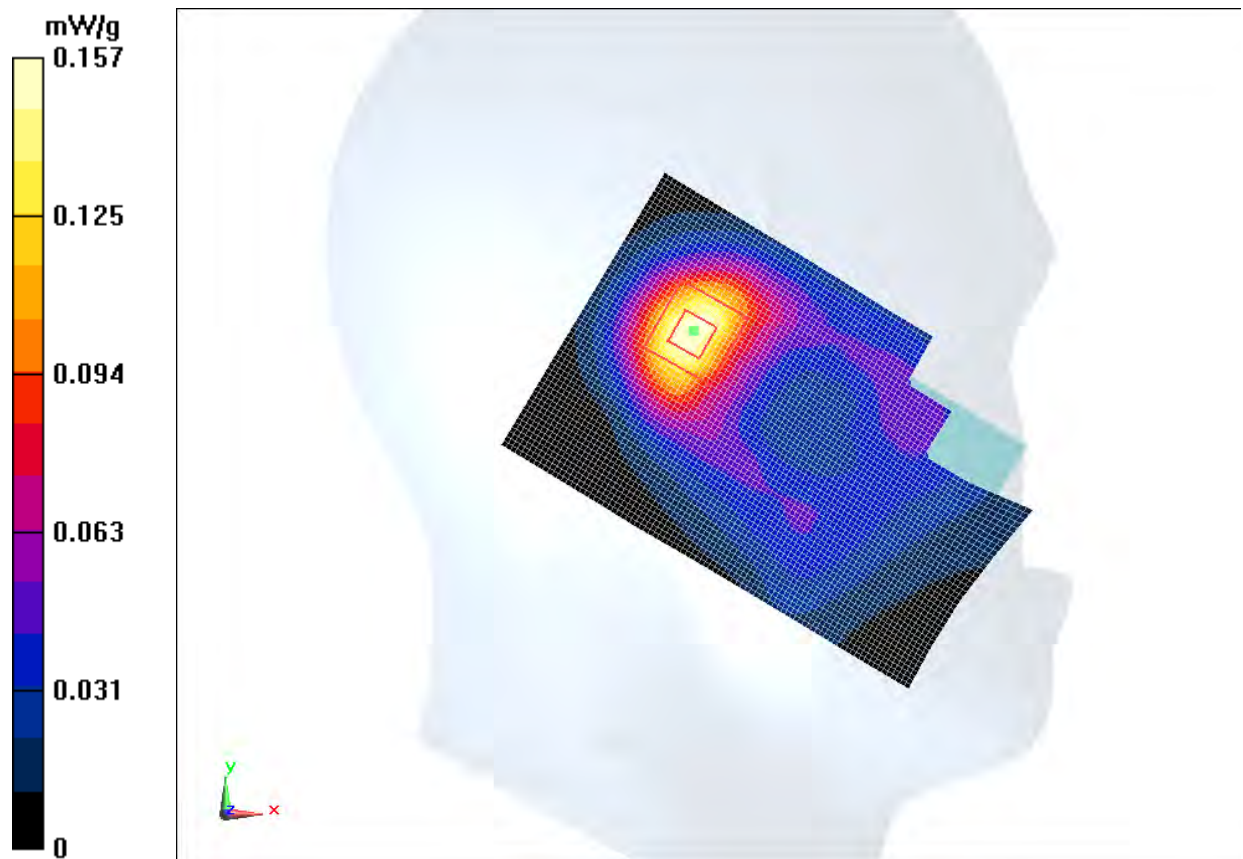


Fig. 30 1900 MHz CH512



**1900 Right Cheek High**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.419$  mho/m;  $\epsilon_r = 39.336$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3


Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek High/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.918 V/m; Power Drift = -0.01 dB

**Fast SAR: SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.343 mW/g**

Maximum value of SAR (interpolated) = 0.712 mW/g

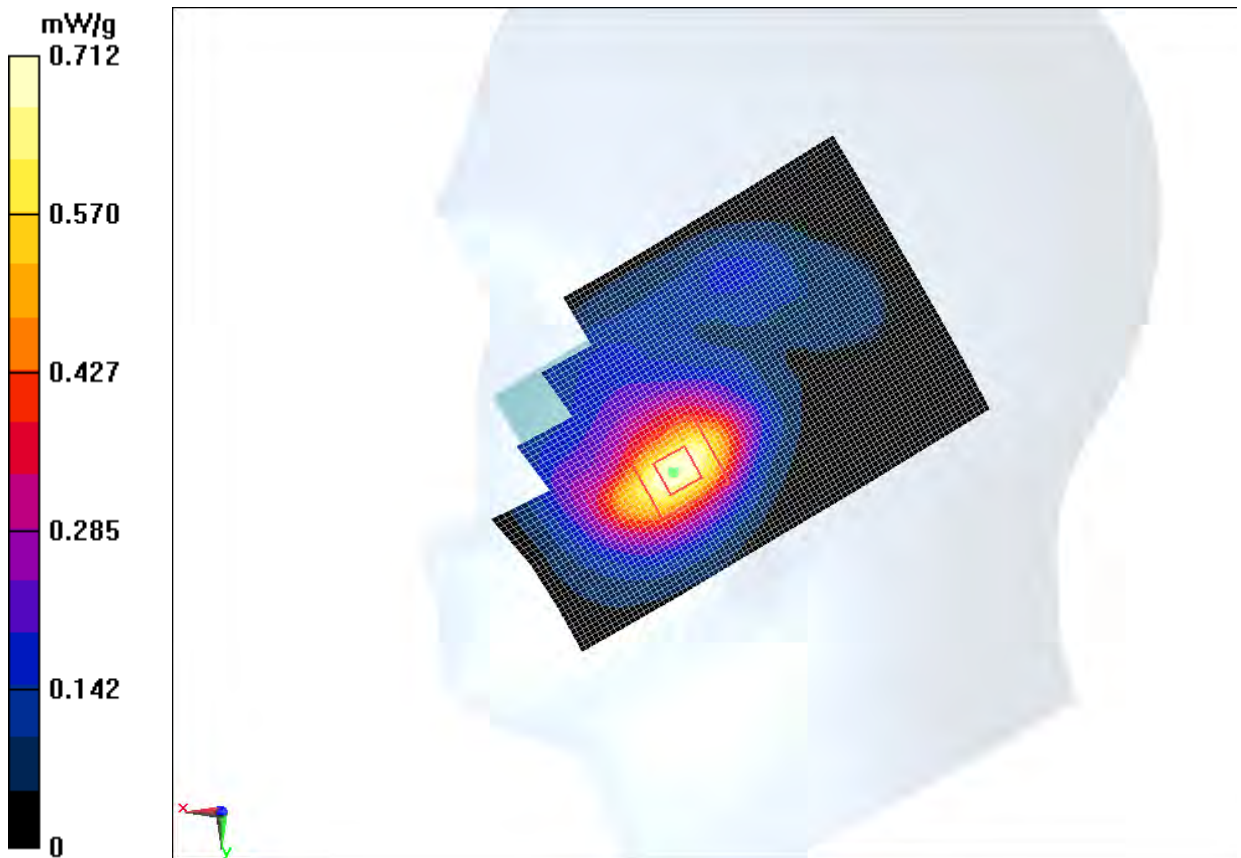

**Fig. 31 1900 MHz CH810**

### 1900 Right Cheek Middle

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.391$  mho/m;  $\epsilon_r = 39.448$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Middle/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.731 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.275 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.051 mW/g

**SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.389 mW/g**

Maximum value of SAR (measured) = 0.730 mW/g

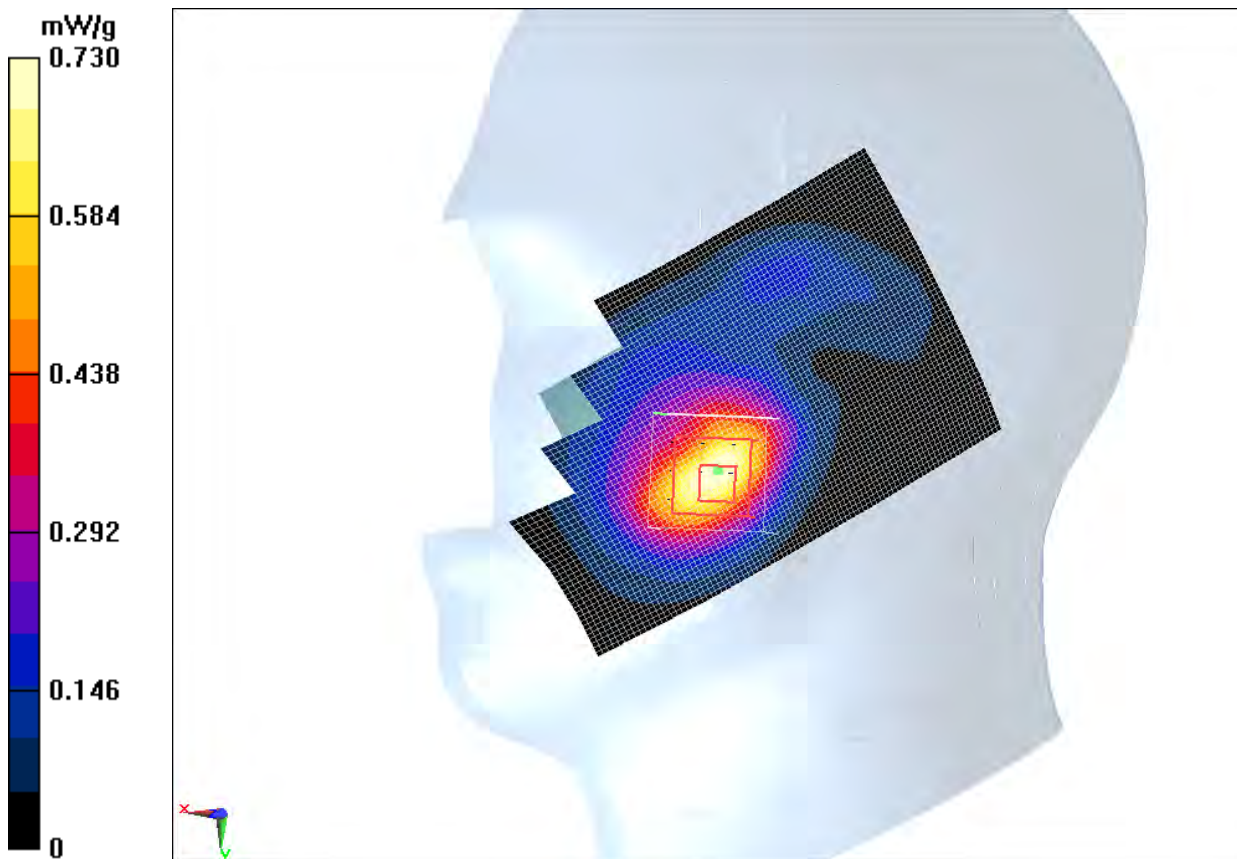


Fig. 32 1900 MHz CH661

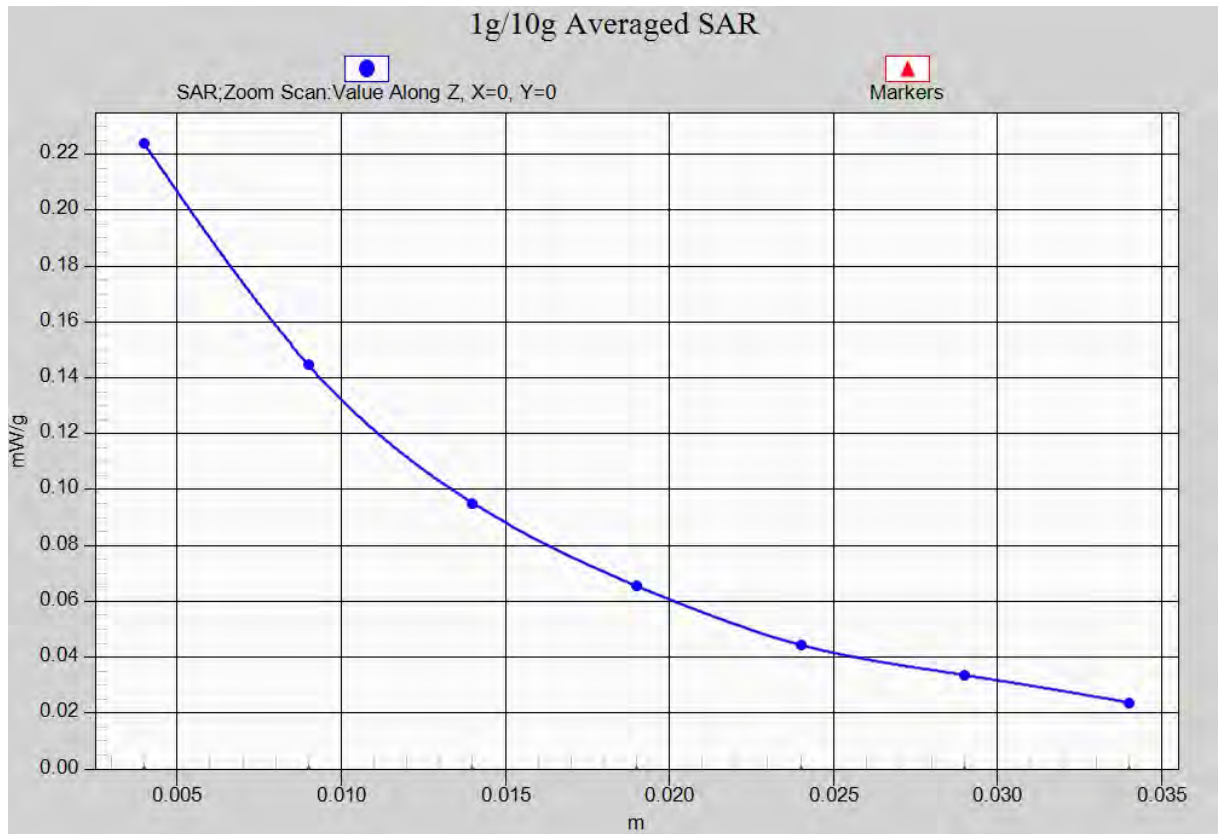


Fig. 32-1 Z-Scan at power reference point (1900 MHz CH661)

### 1900 Right Cheek Low

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.361$  mho/m;  $\epsilon_r = 39.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Cheek Low/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.862 V/m; Power Drift = 0.08 dB

**Fast SAR: SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.330 mW/g**

Maximum value of SAR (interpolated) = 0.692 mW/g

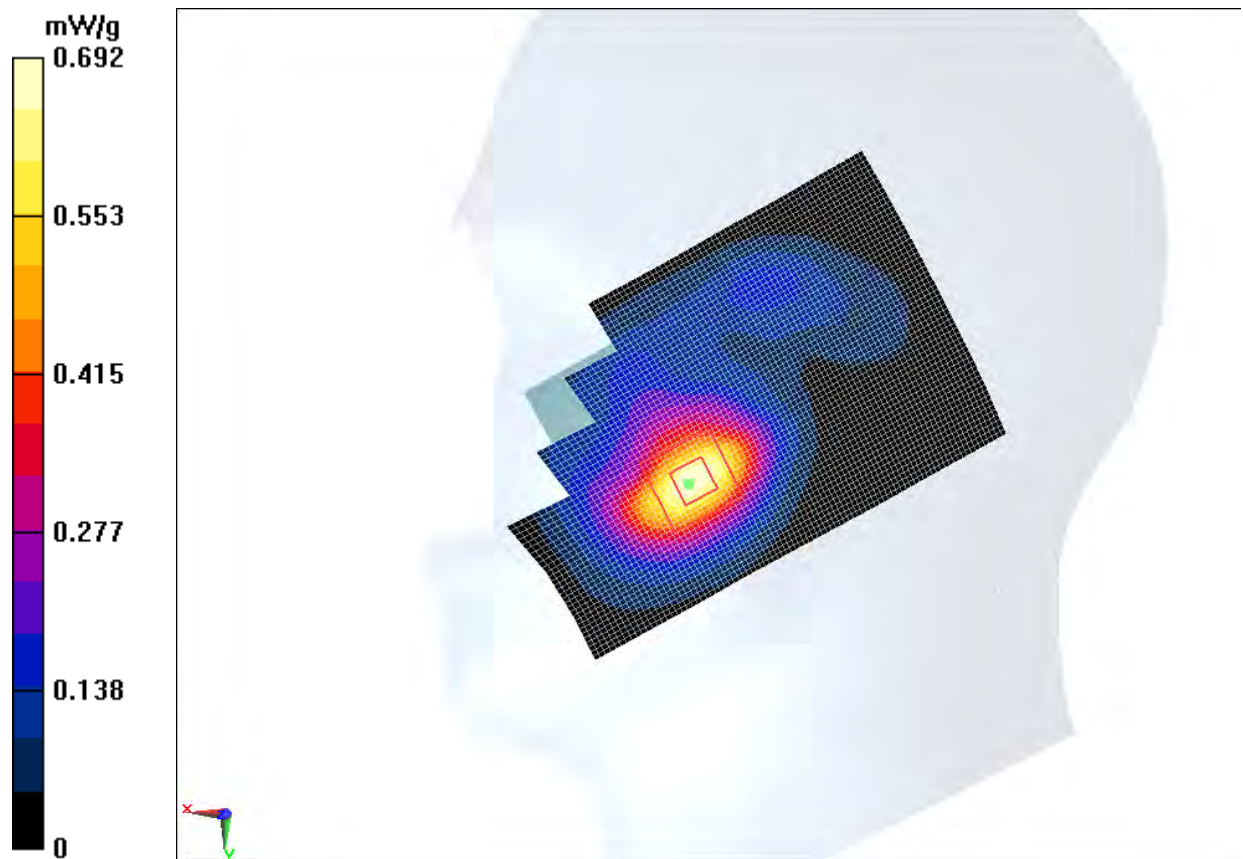


Fig. 33 1900 MHz CH512

**1900 Right Tilt High**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.419$  mho/m;  $\epsilon_r = 39.336$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt High/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 10.118 V/m; Power Drift = 0.00 dB

**Fast SAR: SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.083 mW/g**

Maximum value of SAR (interpolated) = 0.170 mW/g

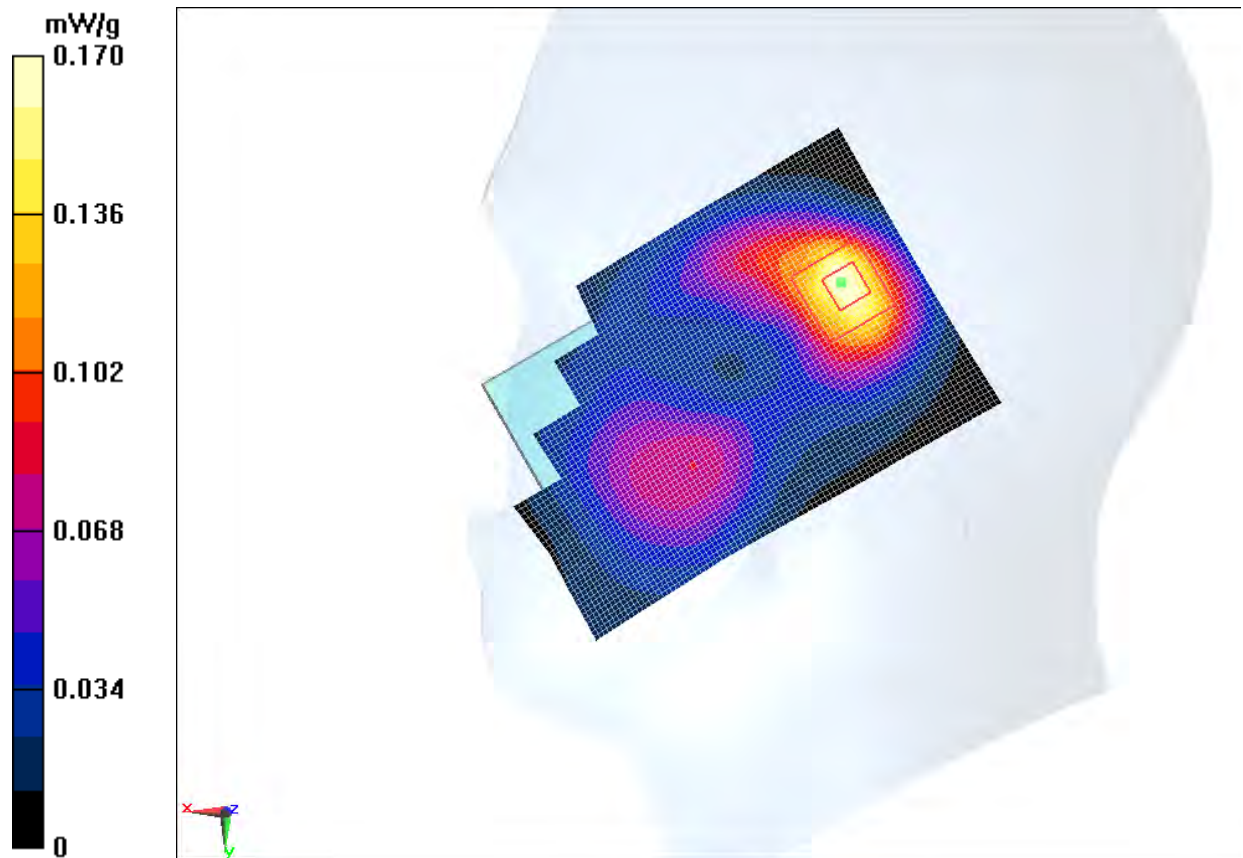


Fig. 34 1900 MHz CH810

**1900 Right Tilt Middle**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.391$  mho/m;  $\epsilon_r = 39.448$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Middle/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 10.574 V/m; Power Drift = -0.04 dB

**Fast SAR: SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.089 mW/g**

Maximum value of SAR (interpolated) = 0.178 mW/g

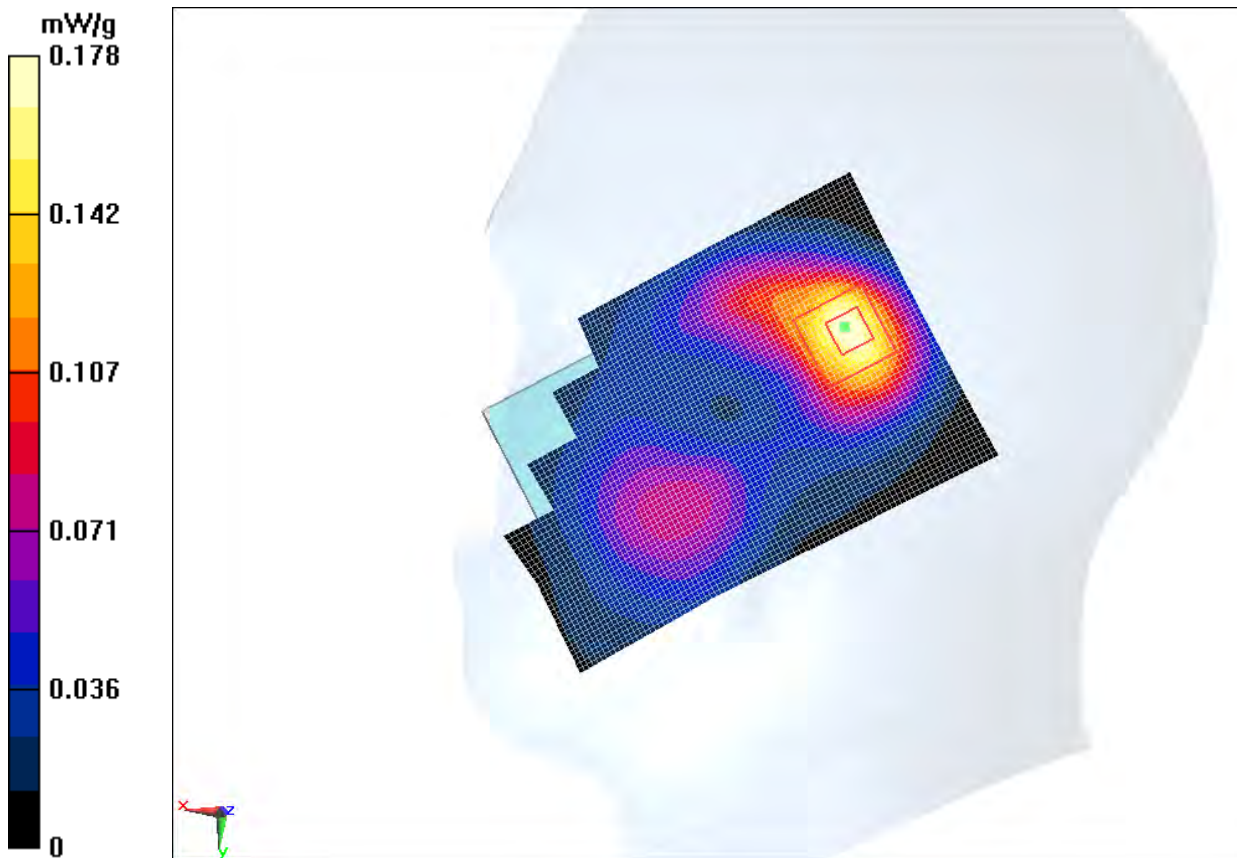


Fig.35 1900 MHz CH661

**1900 Right Tilt Low**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.361$  mho/m;  $\epsilon_r = 39.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3


Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

**Tilt Low/Area Scan (61x91x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 10.373 V/m; Power Drift = 0.03 dB

**Fast SAR: SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.085 mW/g**

Maximum value of SAR (interpolated) = 0.170 mW/g

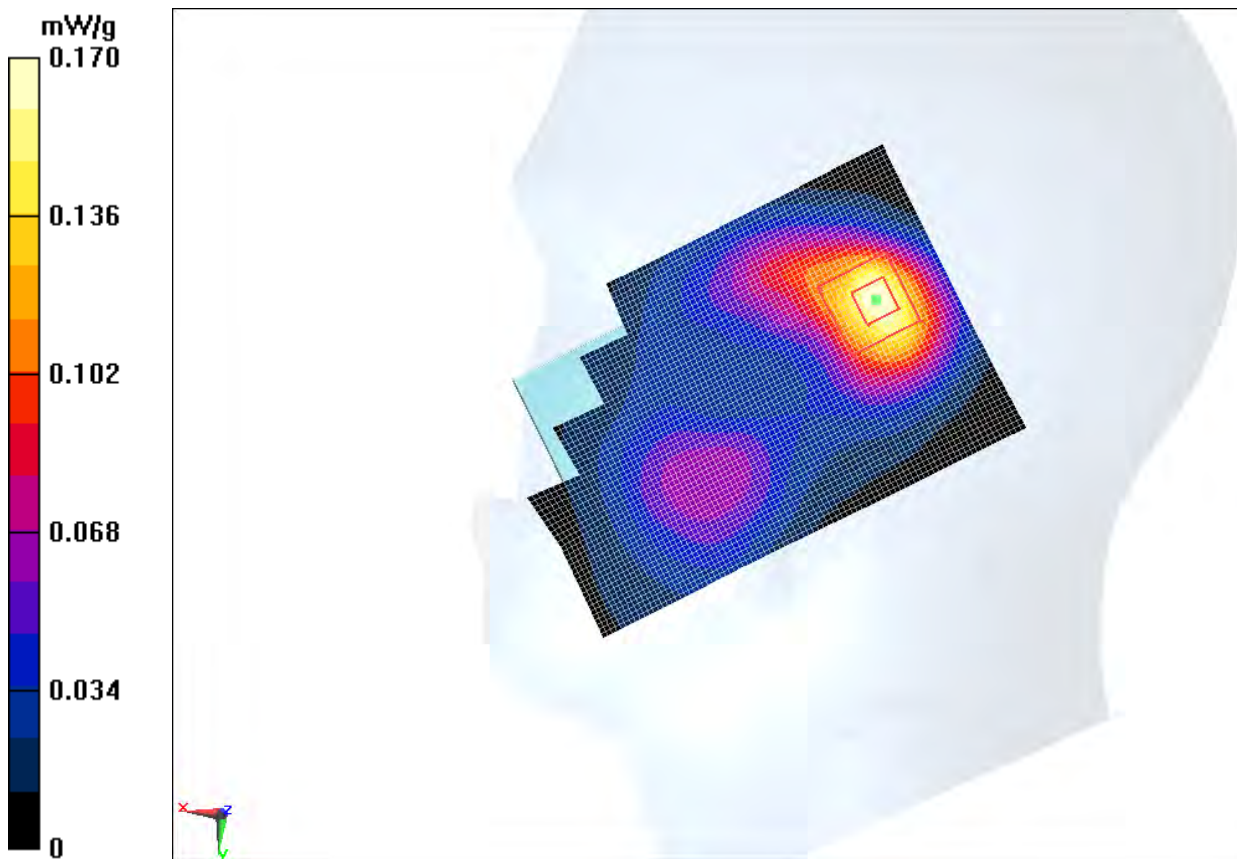

**Fig. 36 1900 MHz CH512**

**1900 Body Toward Phantom Middle with GPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 52.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Phantom Middle/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.154 V/m; Power Drift = 0.03 dB

**Fast SAR: SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (interpolated) = 0.484 mW/g

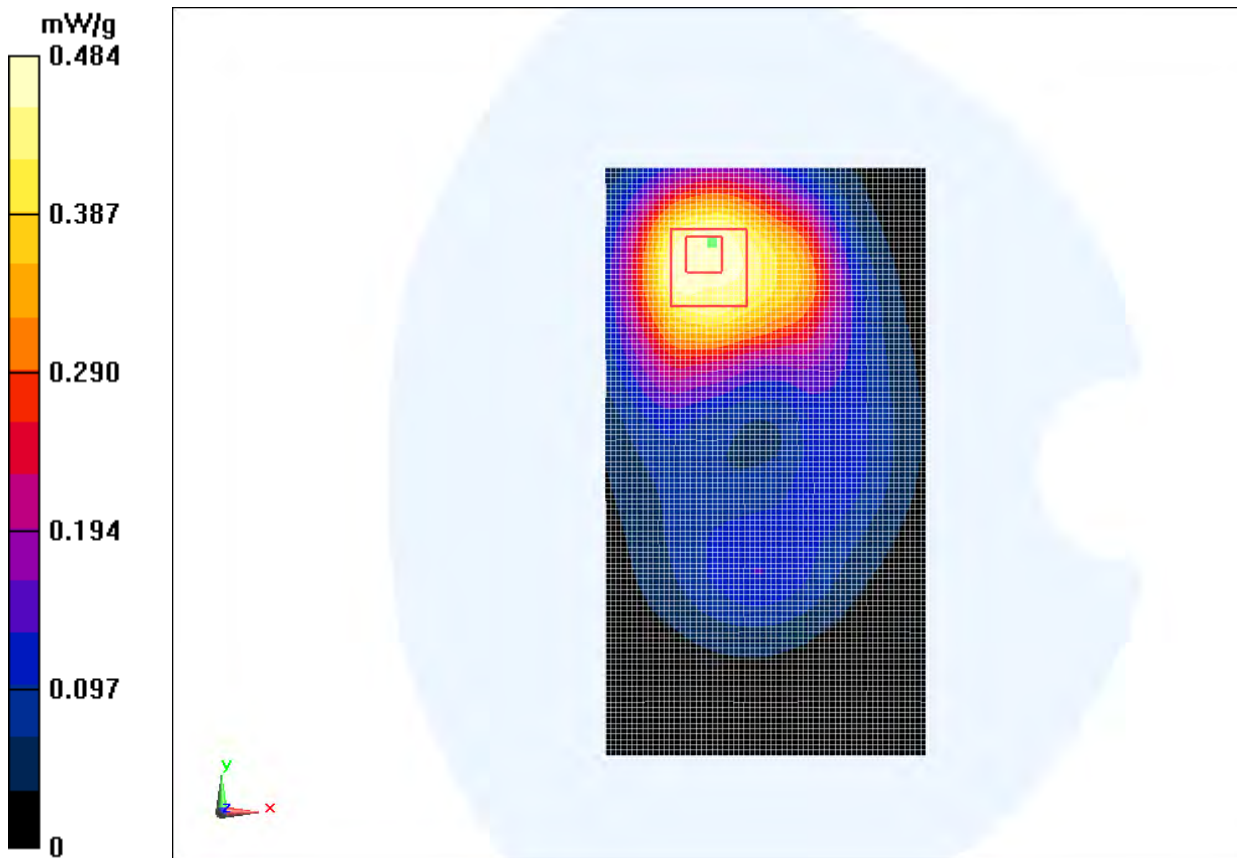


Fig. 37 1900 MHz CH661



**1900 Body Toward Ground Middle with GPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 52.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Toward Ground Middle/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.695 mW/g


**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.331 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.977 mW/g

**SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.391 mW/g**

Maximum value of SAR (measured) = 0.683 mW/g

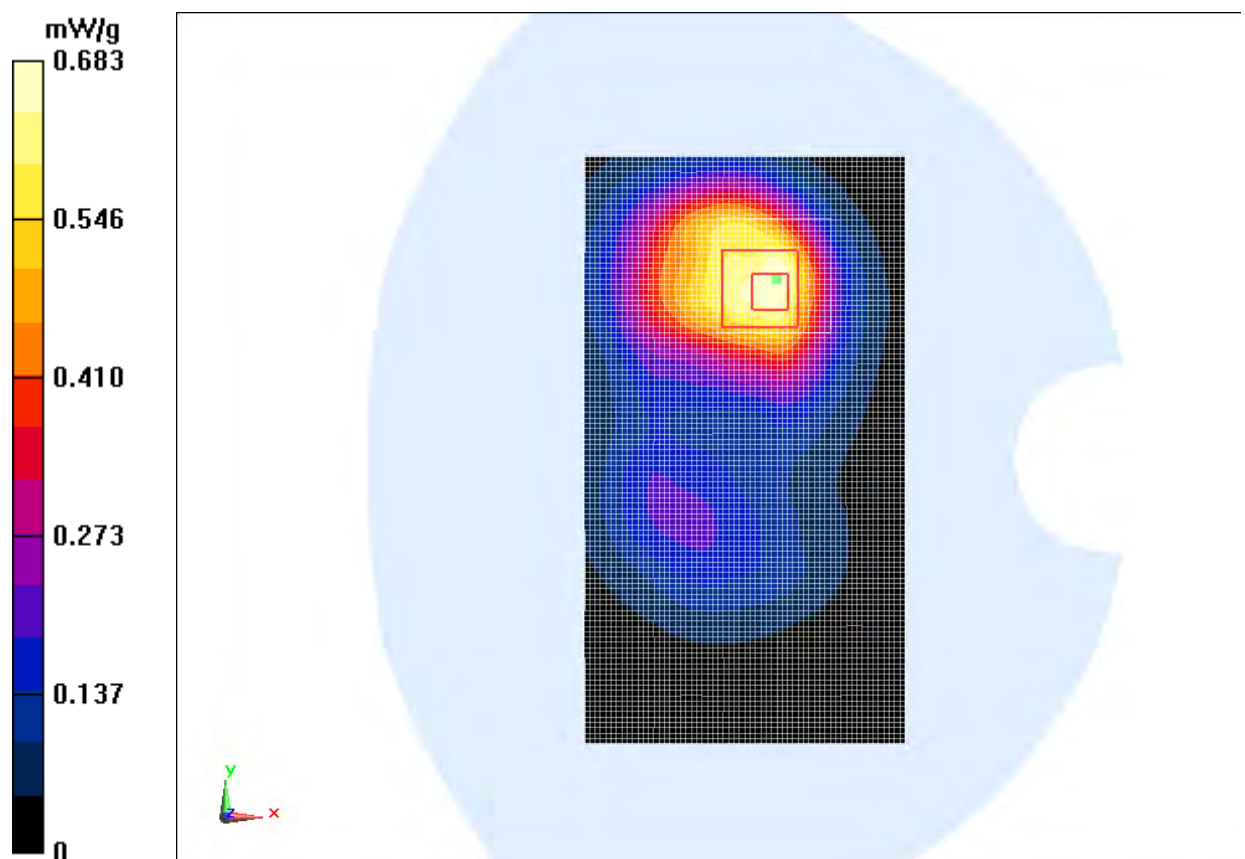

**Fig. 38 1900 MHz CH661**

**1900 Body Left Side Middle with GPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 52.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Left Side Middle/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 7.845 V/m; Power Drift = 0.05 dB

**Fast SAR: SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.056 mW/g**

Maximum value of SAR (interpolated) = 0.109 mW/g

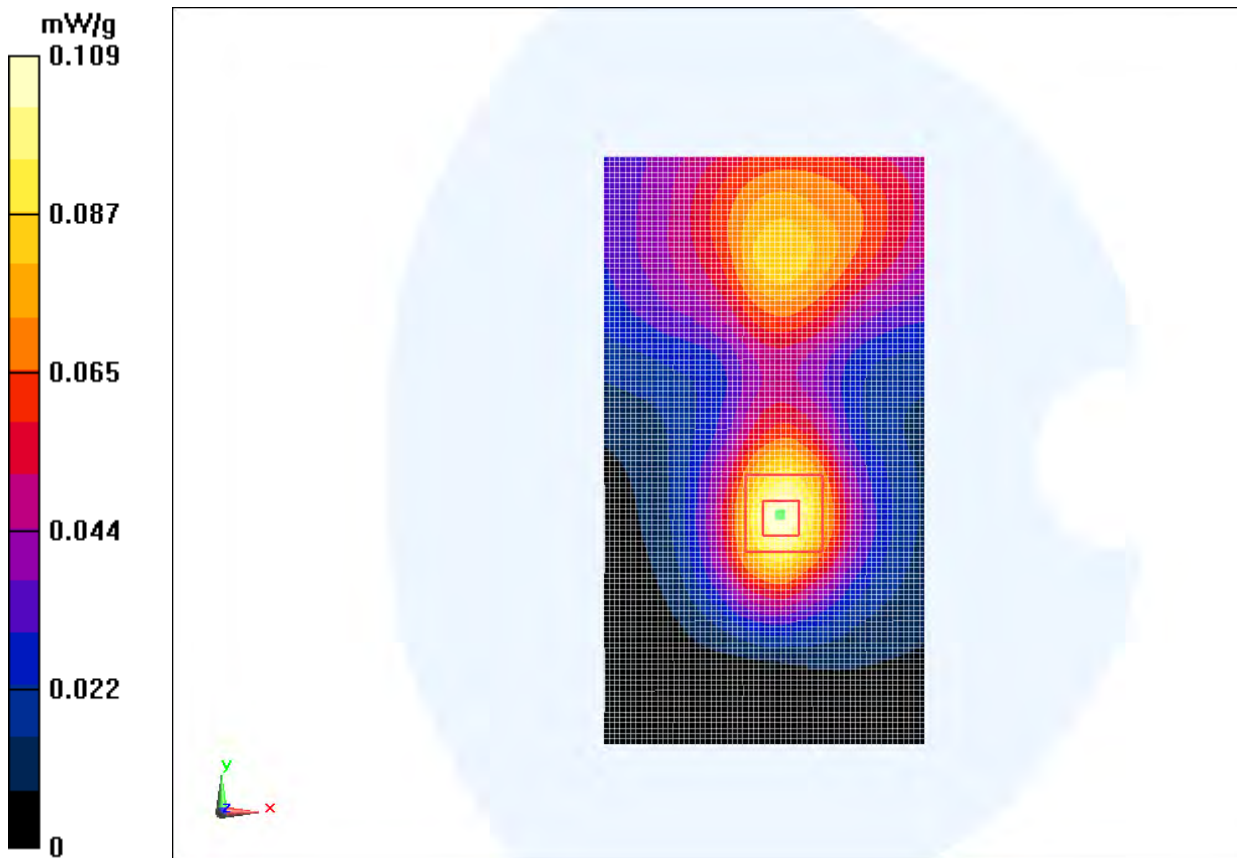


Fig. 39 1900 MHz CH661

### 1900 Body Right Side Middle with GPRS

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 52.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Right Side Middle/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 9.502 V/m; Power Drift = -0.07 dB

**Fast SAR: SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.077 mW/g**

Maximum value of SAR (interpolated) = 0.149 mW/g

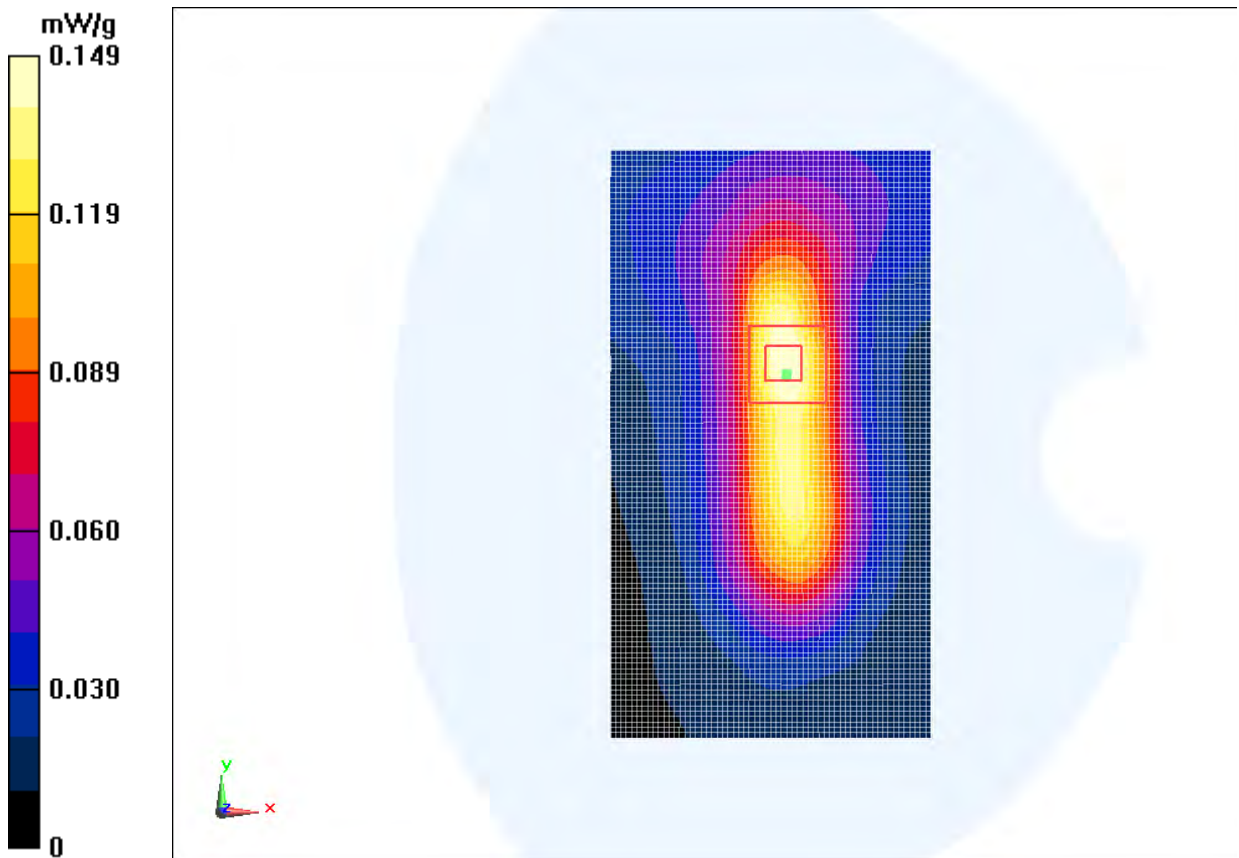


Fig. 40 1900 MHz CH661

**1900 Body Bottom Side High with GPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.521$  mho/m;  $\epsilon_r = 52.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side High/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.953 mW/g


**Bottom Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.856 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.390 mW/g

**SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.469 mW/g**

Maximum value of SAR (measured) = 0.981 mW/g

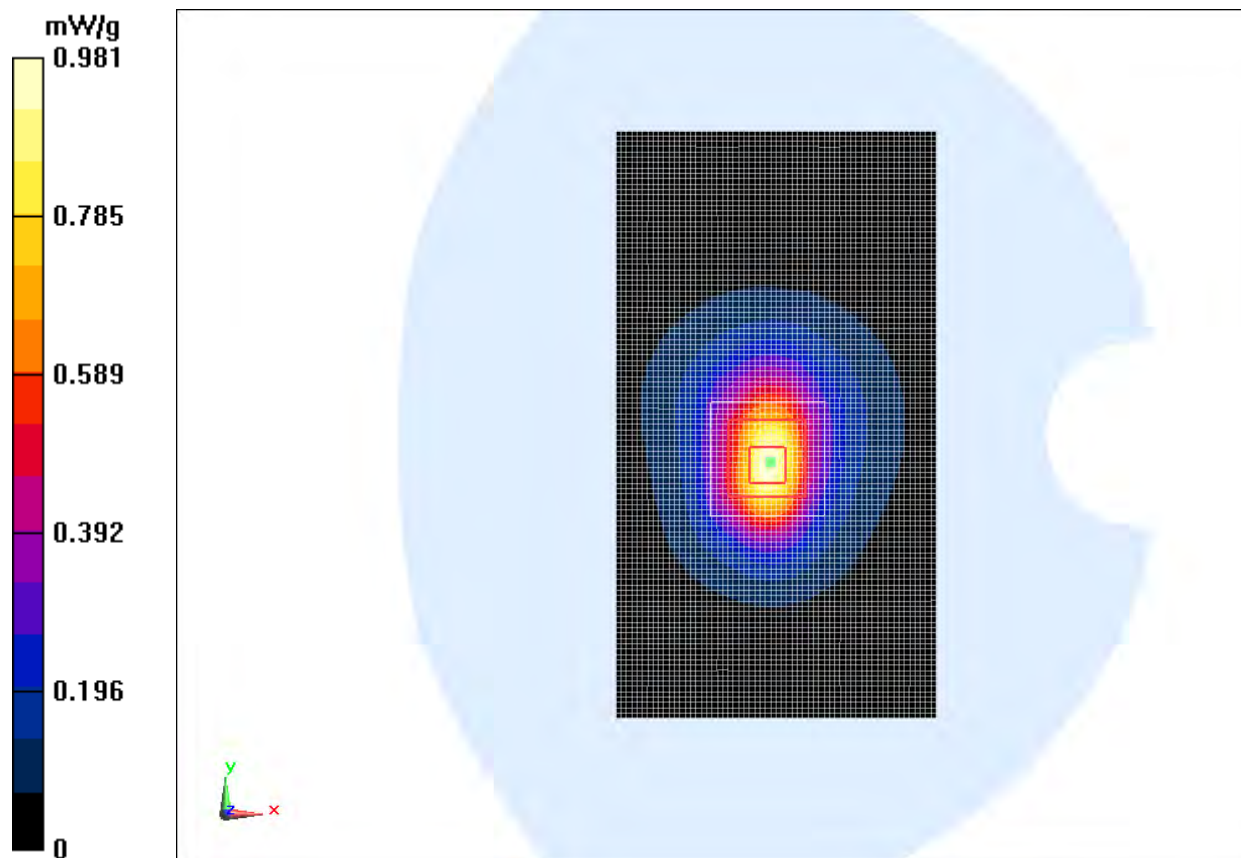

**Fig. 41    1900 MHz CH810**

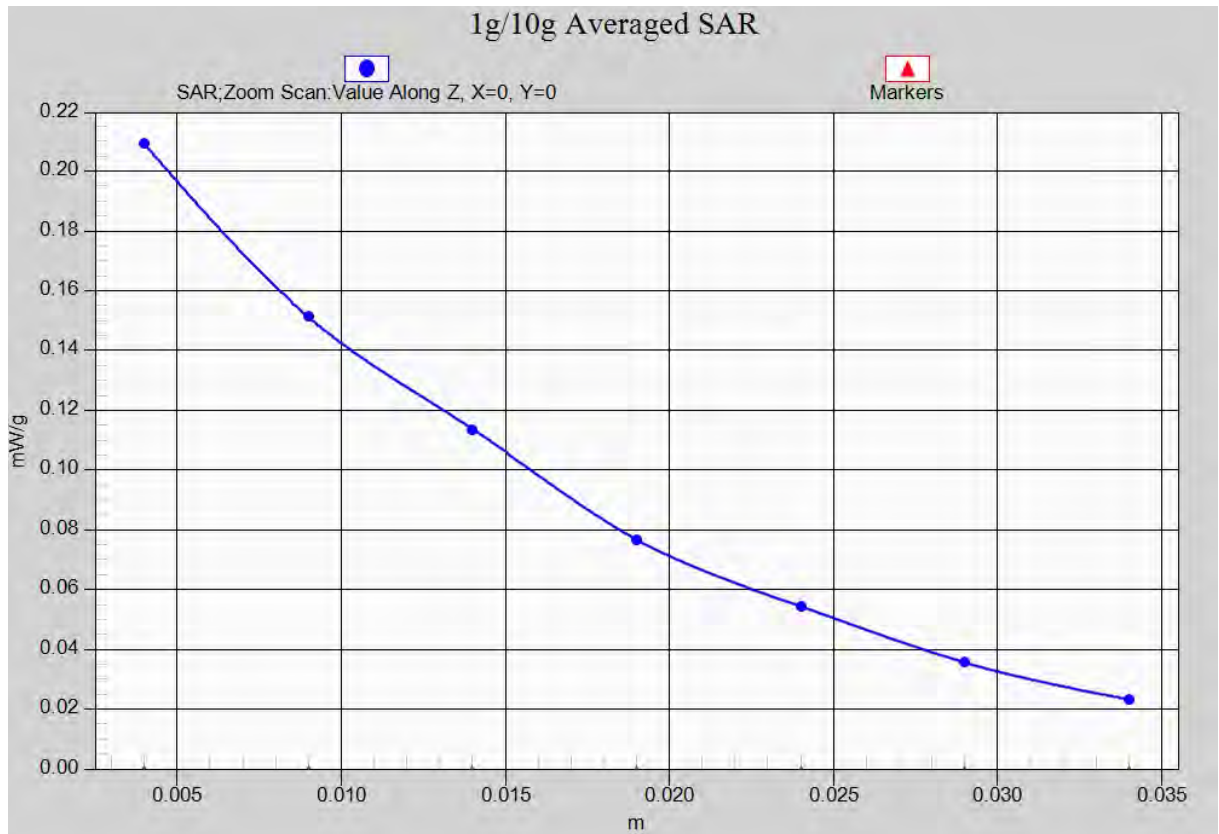

**Fig. 41-1 Z-Scan at power reference point (1900 MHz CH810)**

**1900 Body Bottom Side Middle with GPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.491$  mho/m;  $\epsilon_r = 52.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side Middle/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 24.080 V/m; Power Drift = 0.11 dB

**Fast SAR: SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.432 mW/g**

Maximum value of SAR (interpolated) = 0.902 mW/g

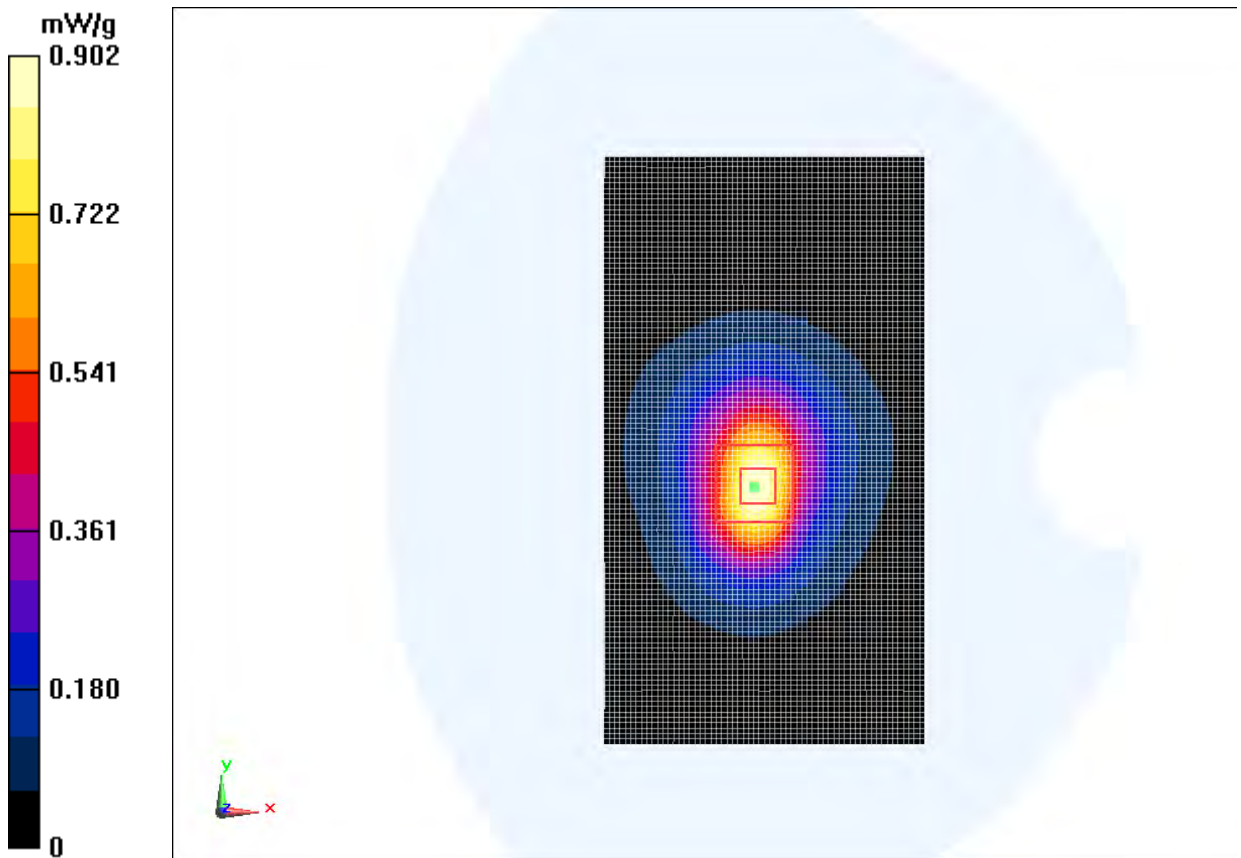


Fig. 42 1900 MHz CH661

### 1900 Body Bottom Side Low with GPRS

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.458$  mho/m;  $\epsilon_r = 52.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side Low/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 22.181 V/m; Power Drift = 0.04 dB

**Fast SAR: SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.372 mW/g**

Maximum value of SAR (interpolated) = 0.782 mW/g

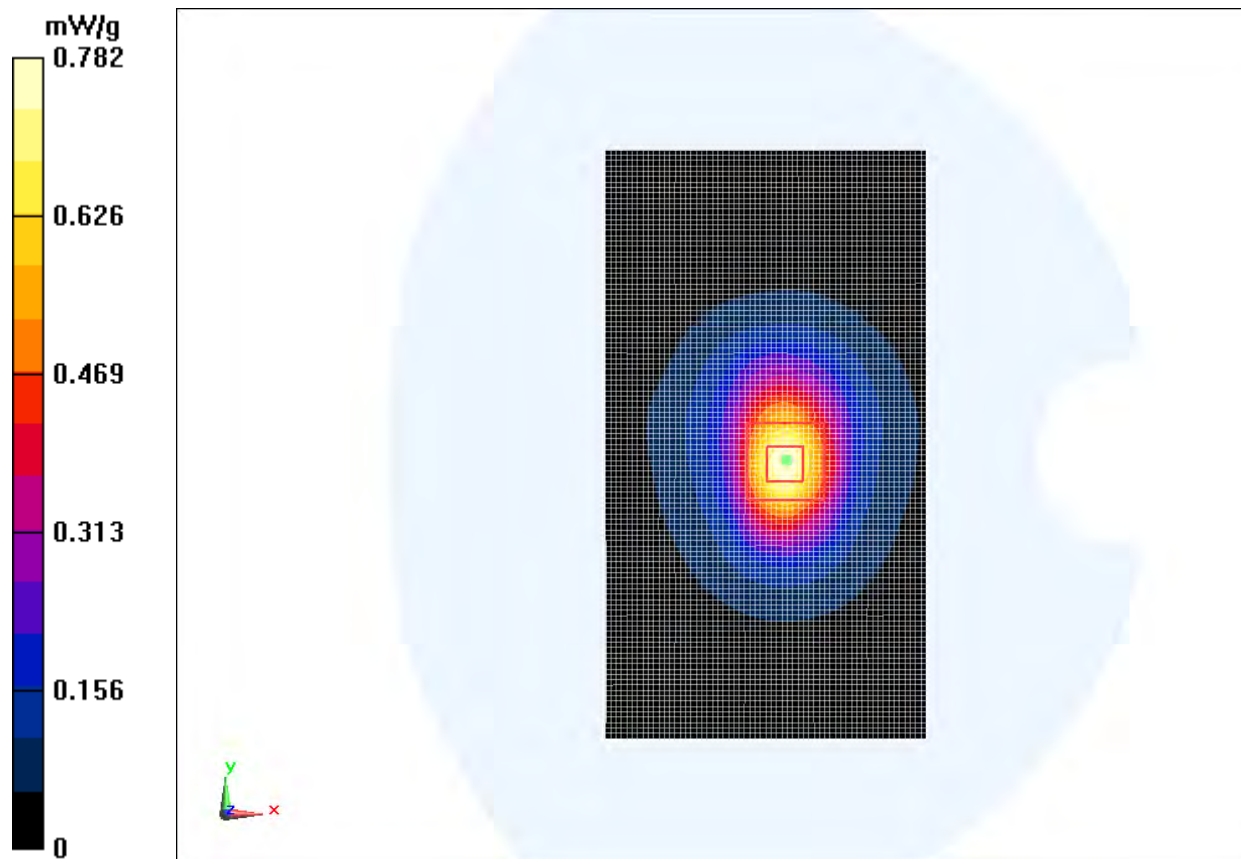


Fig. 43 1900 MHz CH512

**1900 Body Bottom Side High with EGPRS**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.521$  mho/m;  $\epsilon_r = 52.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz EGPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side High/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 23.918 V/m; Power Drift = 0.17 dB

**Fast SAR: SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.426 mW/g**

Maximum value of SAR (interpolated) = 0.907 mW/g

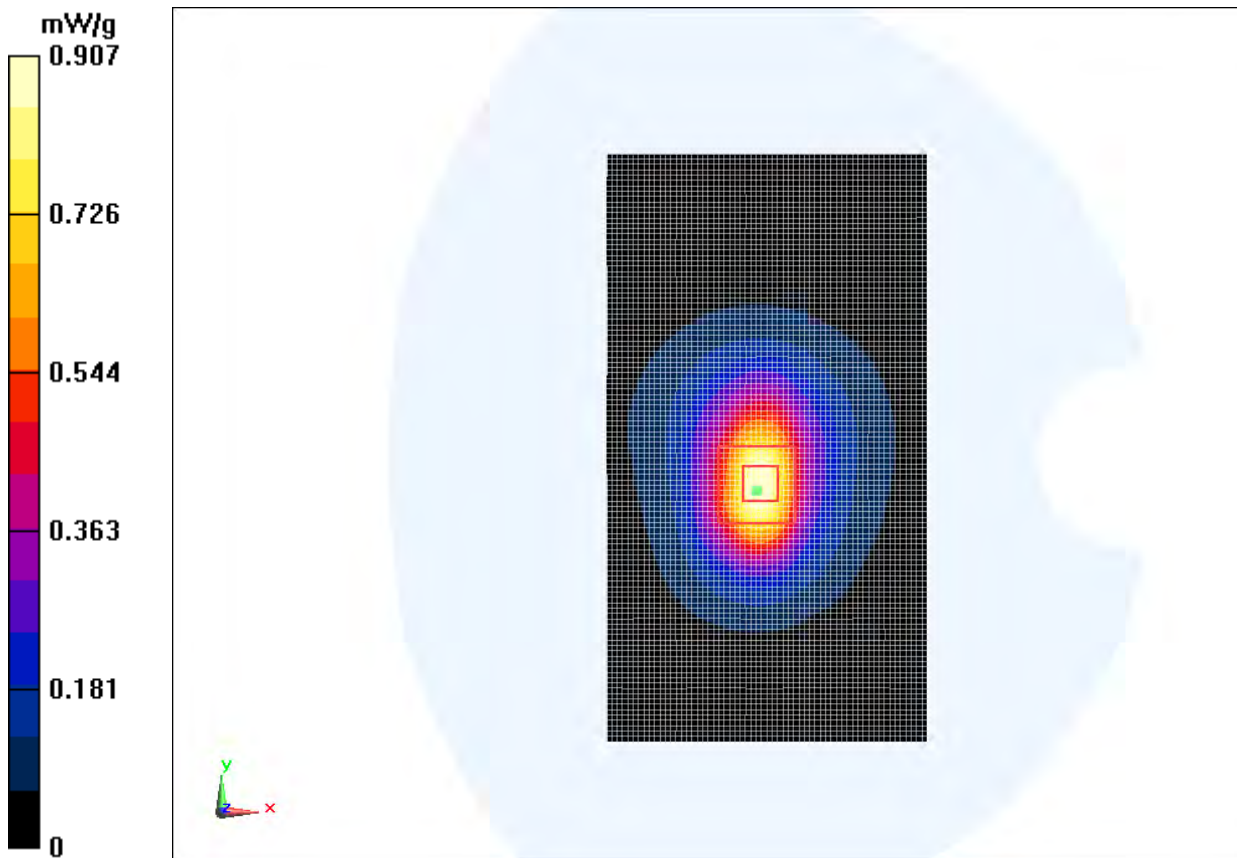


Fig. 44 1900 MHz CH810



**1900 Body Bottom Side High with Headset CCB3160A11C2**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.521$  mho/m;  $\epsilon_r = 52.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side High/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 19.005 V/m; Power Drift = 0.00 dB

**Fast SAR: SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.269 mW/g**

Maximum value of SAR (interpolated) = 0.567 mW/g

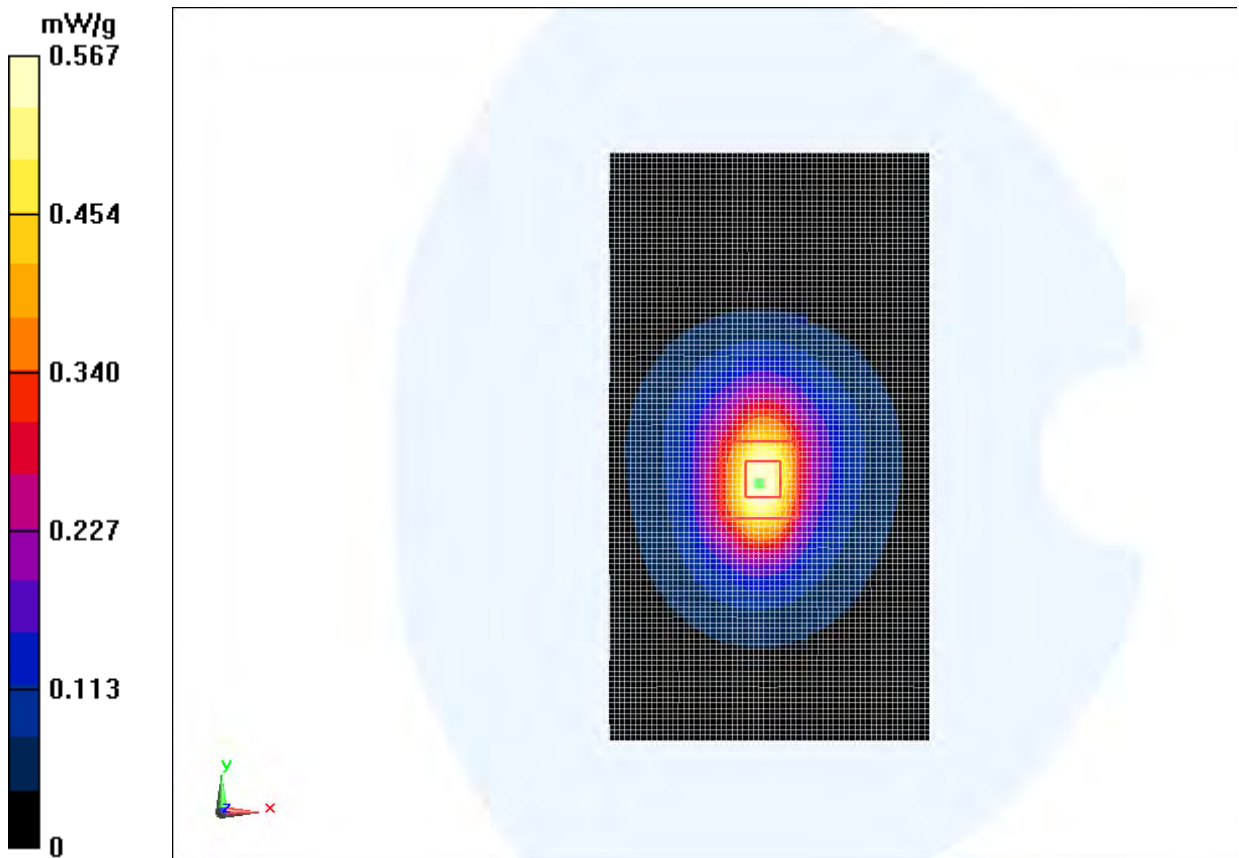


Fig. 45 1900 MHz CH810

**1900 Body Bottom Side High with Headset CCB3160A11C4**

Date: 2013-1-21

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.521$  mho/m;  $\epsilon_r = 52.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C      Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

**Bottom Side High/Area Scan (61x111x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 19.071 V/m; Power Drift = 0.00 dB

**Fast SAR: SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.268 mW/g**

Maximum value of SAR (interpolated) = 0.573 mW/g

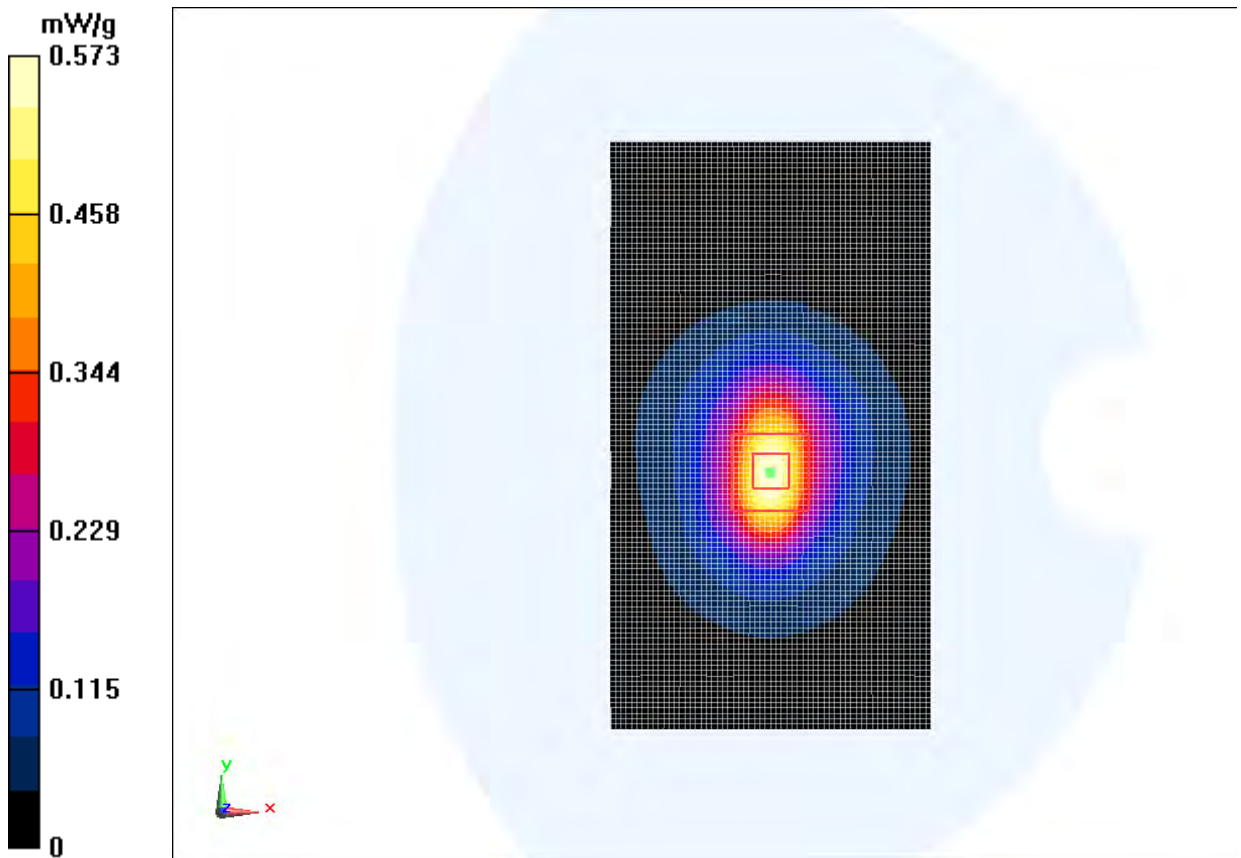


Fig. 46 1900 MHz CH810

### WCDMA 850 Left Cheek High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.893$  mho/m;  $\epsilon_r = 40.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 8.290 V/m; Power Drift = 0.12 dB

**Fast SAR: SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.351 W/kg**

Maximum value of SAR (interpolated) = 0.554 W/kg

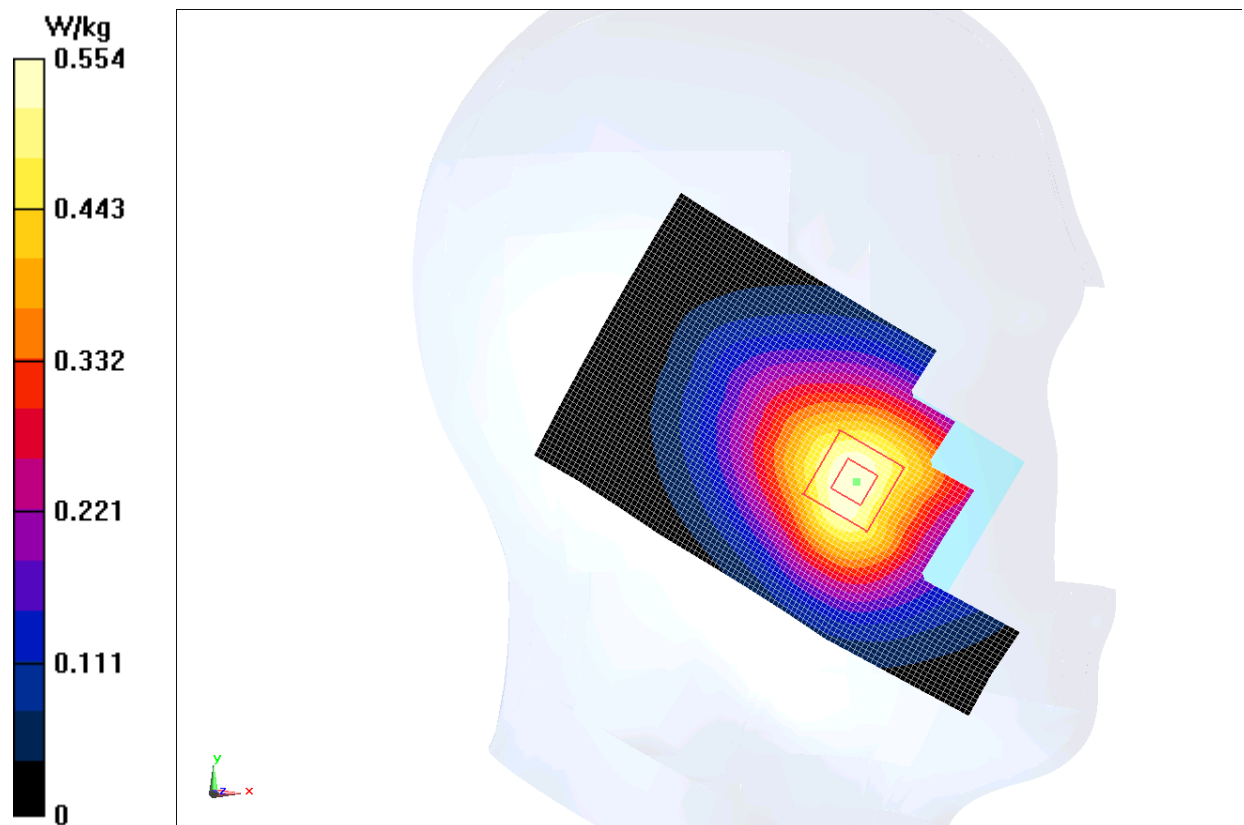


Fig. 47 WCDMA 850 CH4233

**WCDMA 850 Left Cheek Middle**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.807$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.659 W/kg

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.194 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.809 W/kg

**SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.481 W/kg**

Maximum value of SAR (measured) = 0.681 W/kg


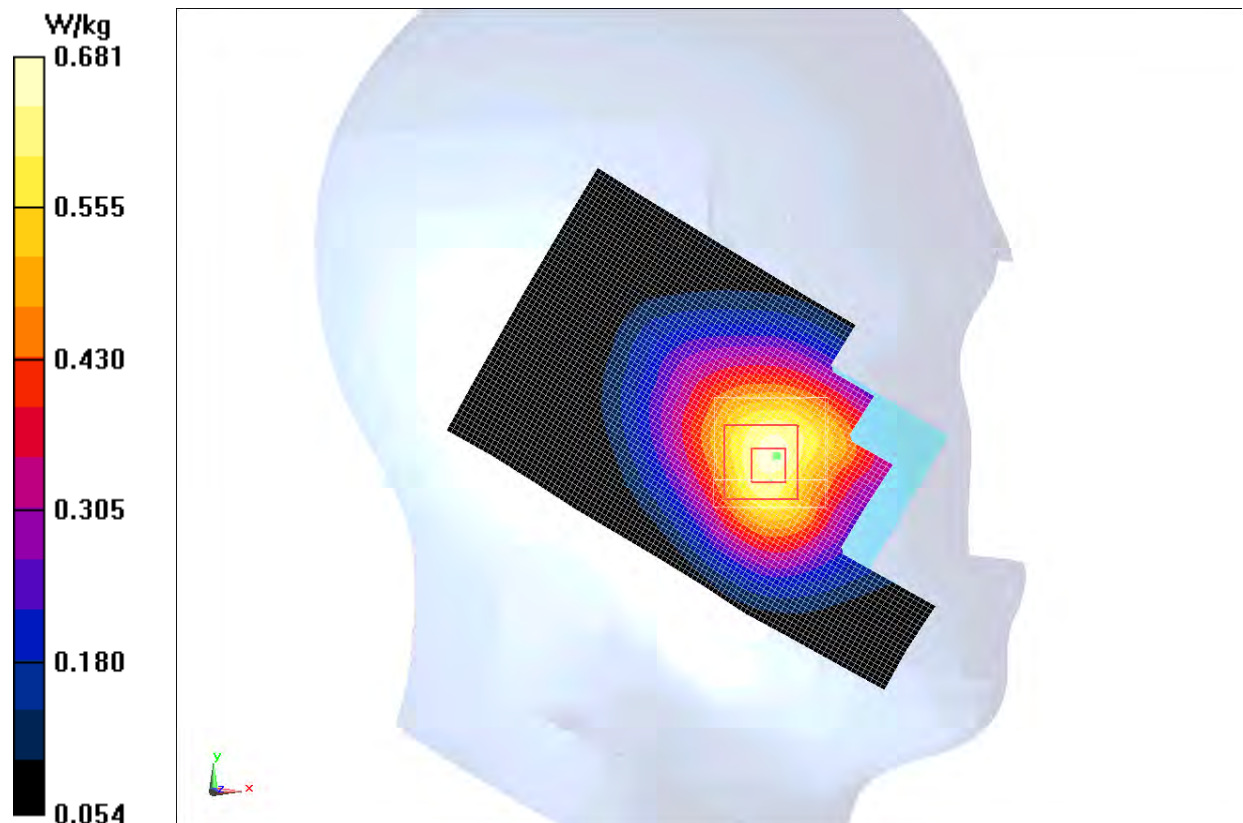


Fig. 48 WCDMA 850 CH4182

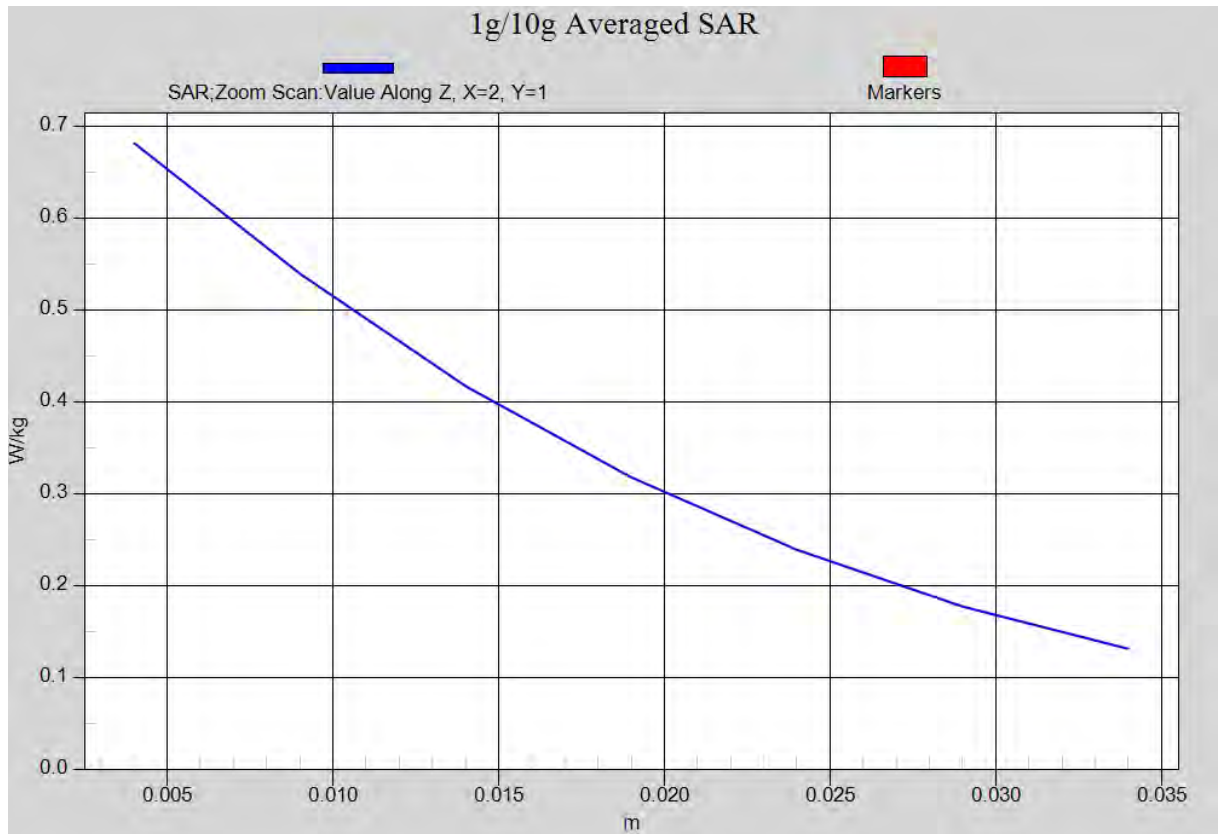

**Fig. 48-1 Z-Scan at power reference point (WCDMA 850 CH4182)**

### WCDMA 850 Left Cheek Low

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.873$  mho/m;  $\epsilon_r = 40.929$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 8.218 V/m; Power Drift = -0.01 dB

**Fast SAR: SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.311 W/kg**

Maximum value of SAR (interpolated) = 0.489 W/kg

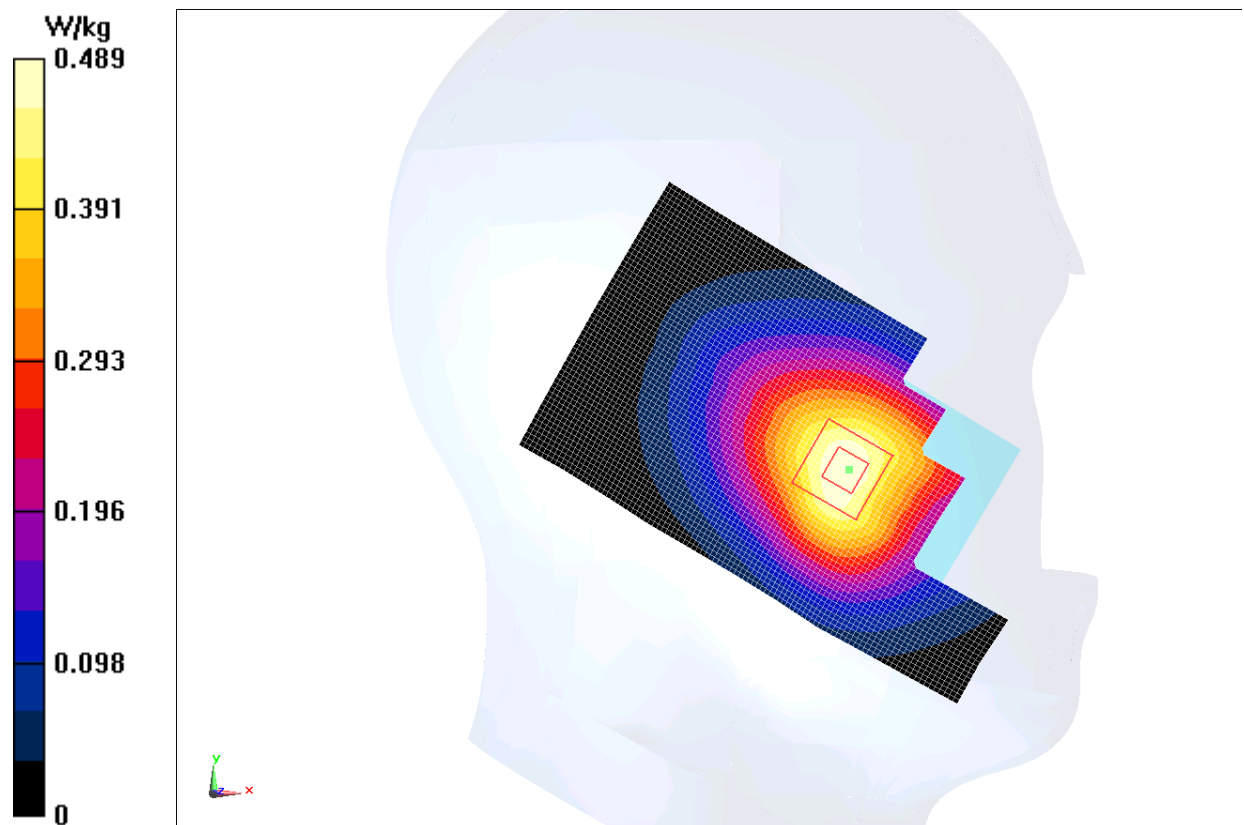


Fig. 49 WCDMA 850 CH4132

**WCDMA 850 Left Tilt High**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.893$  mho/m;  $\epsilon_r = 40.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1


Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 11.187 V/m; Power Drift = 0.06 dB

**Fast SAR: SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (interpolated) = 0.312 W/kg

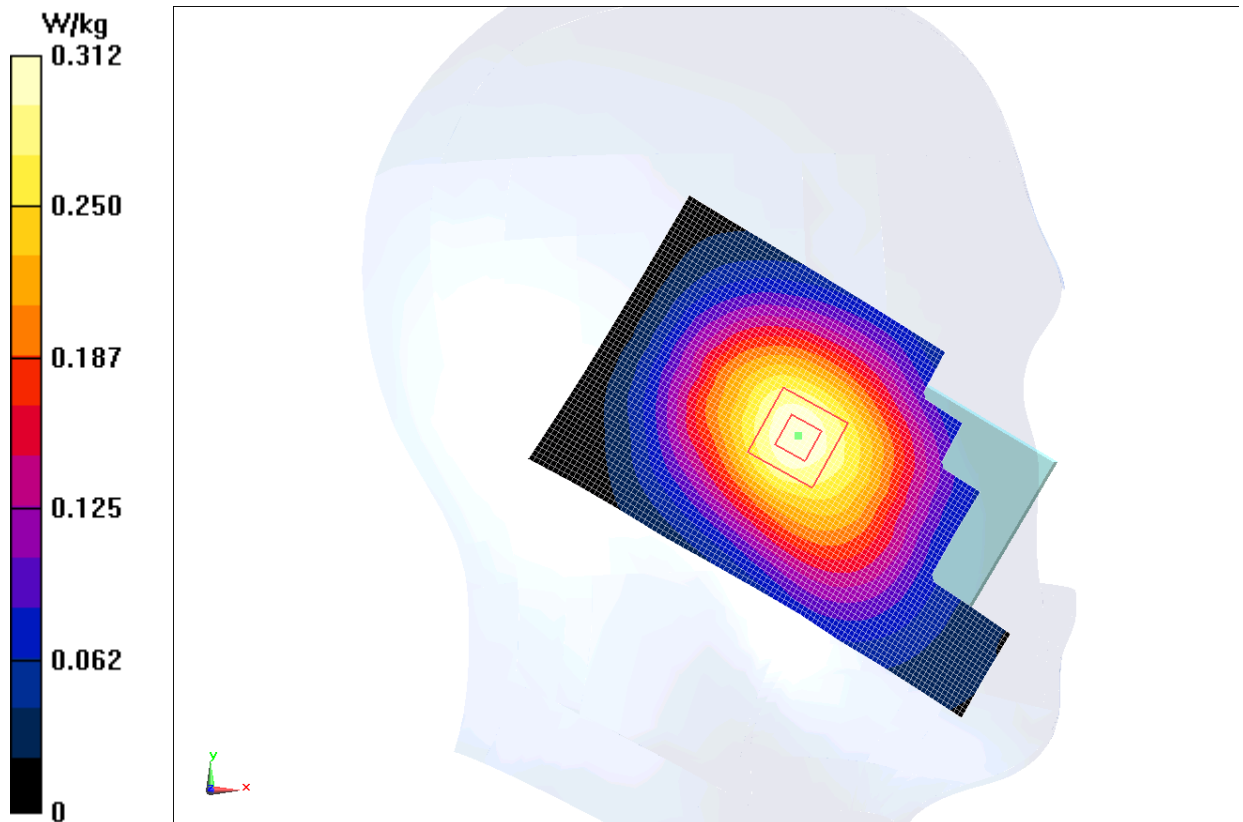

**Fig. 50 WCDMA 850 CH4233**

### WCDMA 850 Left Tilt Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.807$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 13.048 V/m; Power Drift = 0.06 dB

**Fast SAR: SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (interpolated) = 0.346 W/kg

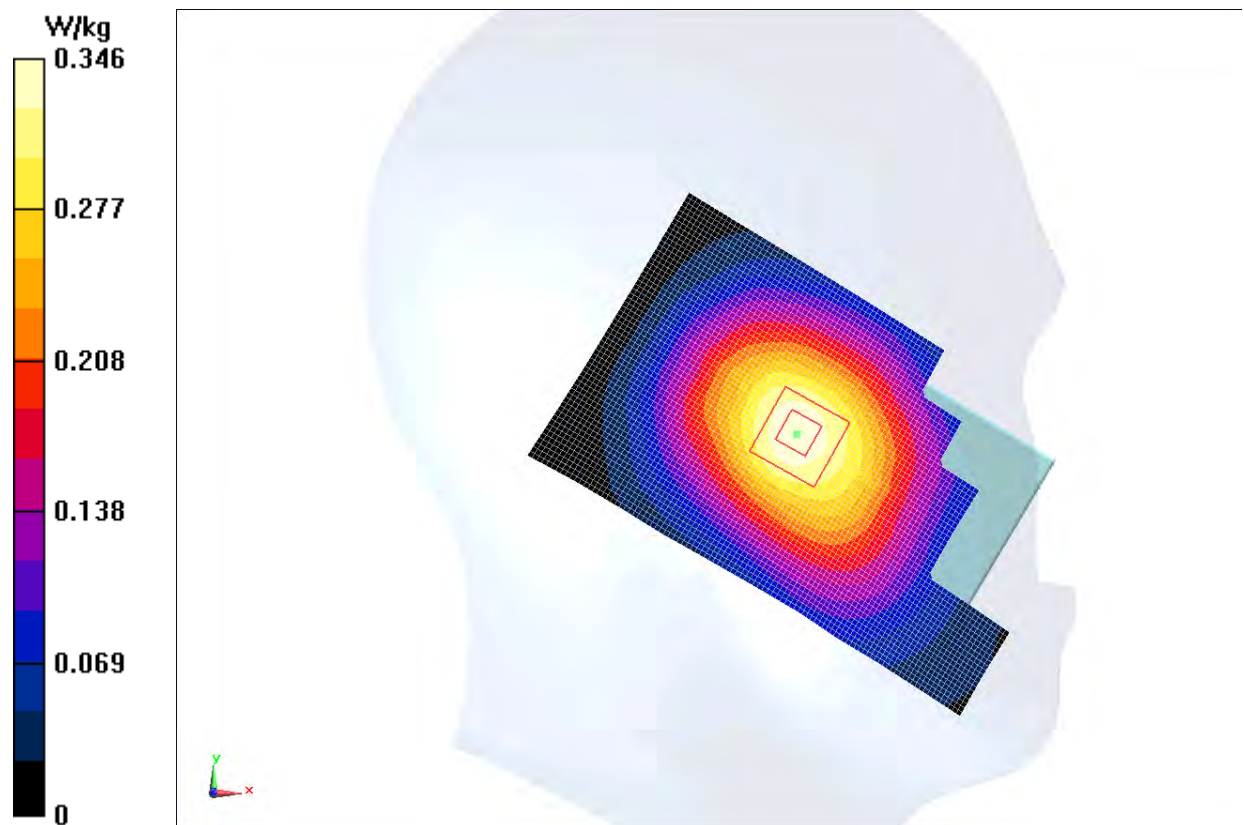


Fig. 51 WCDMA 850 CH4182



**WCDMA 850 Left Tilt Low**

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.873$  mho/m;  $\epsilon_r = 40.929$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1


Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Tilt Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 11.492 V/m; Power Drift = 0.00 dB

**Fast SAR: SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (interpolated) = 0.269 W/kg

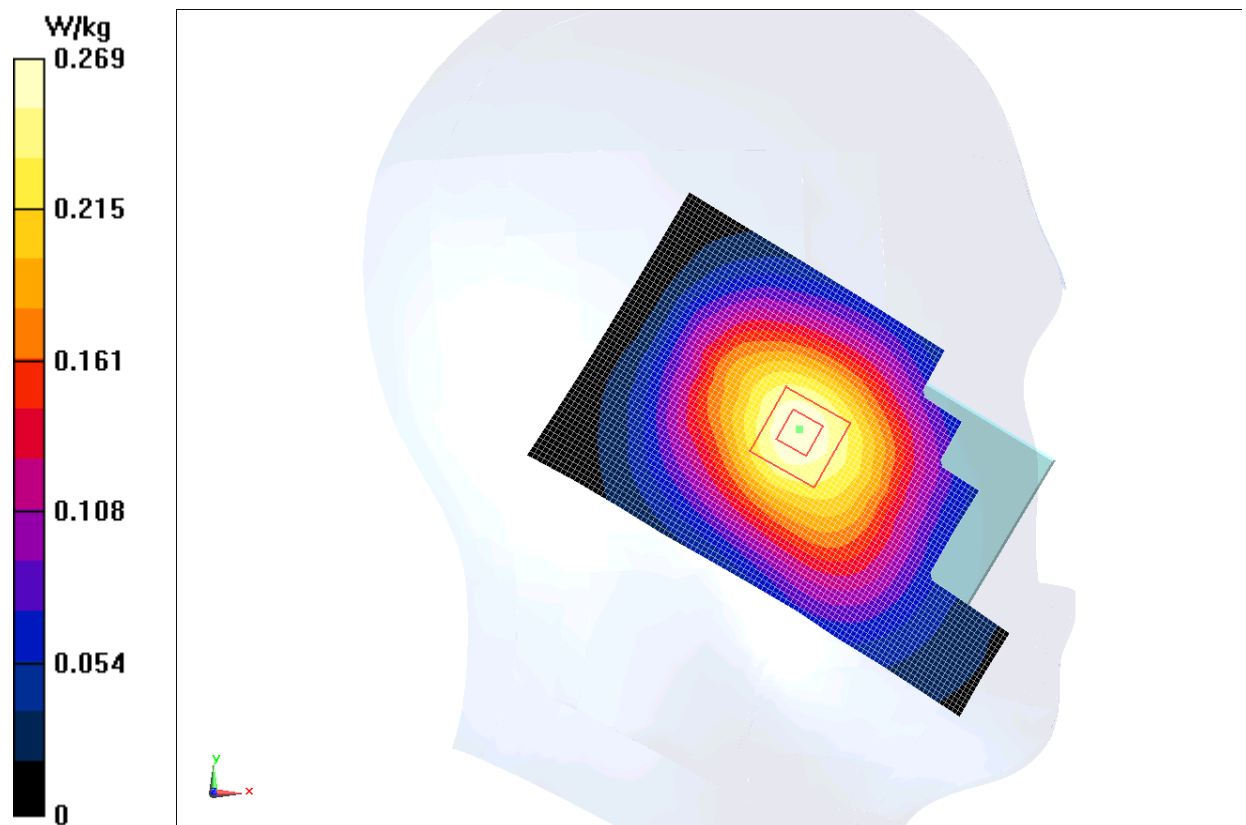

**Fig. 52 WCDMA 850 CH4132**

### WCDMA 850 Right Cheek High

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.893$  mho/m;  $\epsilon_r = 40.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek High/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.684 V/m; Power Drift = 0.05 dB

**Fast SAR: SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.334 W/kg**

Maximum value of SAR (interpolated) = 0.519 W/kg

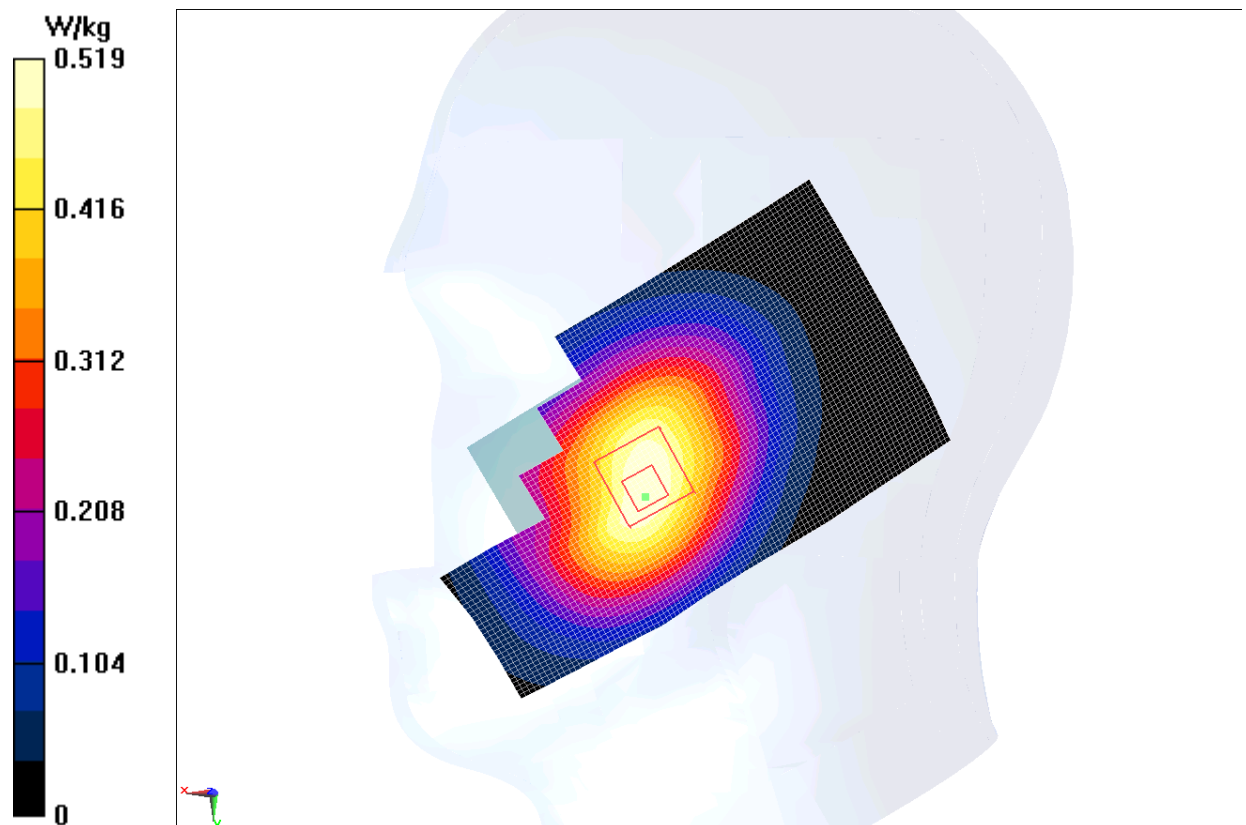


Fig. 53 WCDMA 850 CH4233

### WCDMA 850 Right Cheek Middle

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 40.807$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Middle/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.631 W/kg

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.418 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.797 W/kg

**SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.444 W/kg**

Maximum value of SAR (measured) = 0.621 W/kg

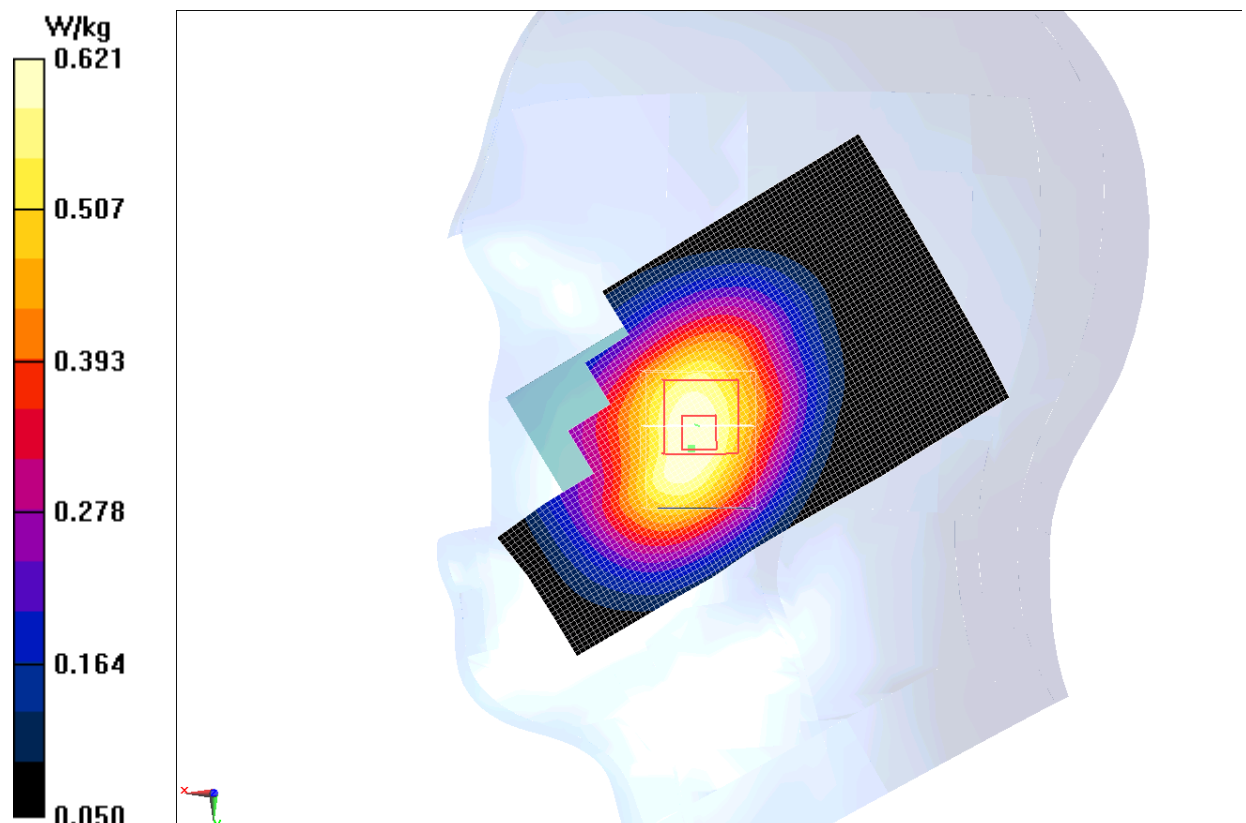


Fig. 54 WCDMA 850 CH4182

### WCDMA 850 Right Cheek Low

Date: 2013-1-19

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.873$  mho/m;  $\epsilon_r = 40.929$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4°C      Liquid Temperature: 21.9°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

**Cheek Low/Area Scan (61x101x1):** Measurement grid: dx=10 mm, dy=10 mm

Reference Value = 6.319 V/m; Power Drift = 0.09 dB

**Fast SAR: SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (interpolated) = 0.470 W/kg

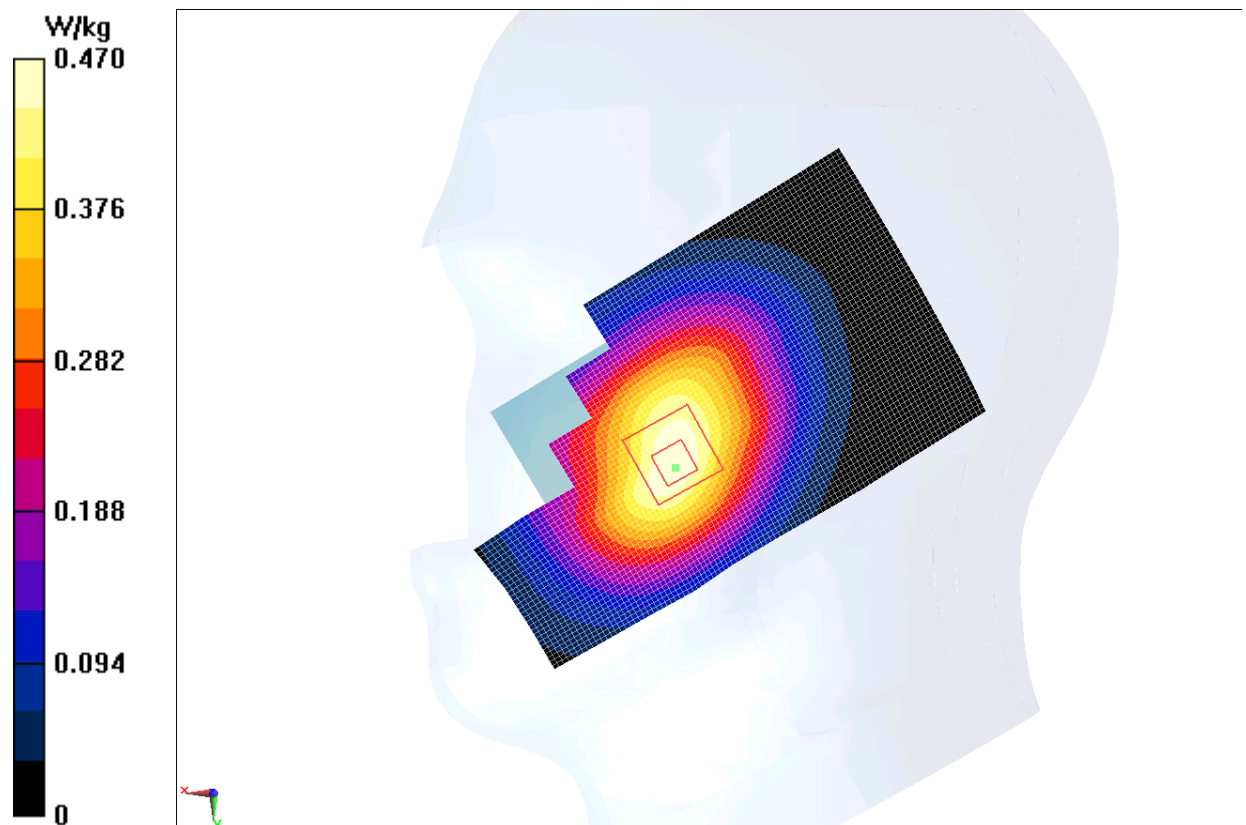


Fig. 55 WCDMA 850 CH4132