



TEST REPORT

No. 2013TAR035

for

TCT Mobile Limited

GSM quad bands mobile phone

Model Name: Beetle Lite US

Marketing Name: Beetle Lite Edge 2SIM

FCC ID: RAD320

with

Hardware Version: Proto

Software Version: vD15

Issued Date: Jan. 24th, 2013

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcme@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. EUT SET-UPS.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS.....	11

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 0086-10-62304633-2561
Fax: 0086-10-62304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Jan. 05th, 2013
Testing End Date: Jan. 07th, 2013

1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM quad bands mobile phone
Model Name	Beetle Lite Edge 2SIM
Marketing Name	ONE TOUCH 4005D
FCC ID	RAD320
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	869315010053827	Proto	vD15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Battery	BAK2012102400142
AE3	Travel Adapter	/
AE4	Travel Adapter	/
AE5	USB Cable	/
AE6	USB Cable	/
AE7	USB Cable	/
AE8	USB Cable	/

AE1

Model	CAB60B0000C1
Manufacturer	BYD
Capacitance	1400 mAh
Nominal Voltage	3.7 V

AE2

Model	CAB60B0000C2
Manufacturer	BAK
Capacitance	1400 mAh
Nominal Voltage	3.7 V

AE3

Model	CBA3007AG0C1
Manufacturer	BYD
Length of cable	101 cm

AE4

Model	CBA3007AG0C3
Manufacturer	Yingju
Length of cable	101 cm

AE5
 Model CDA3122002C1
 Manufacturer Juwei
 Length of cable 101 cm

AE6
 Model CDA3122002C2
 Manufacturer Shenghua
 Length of cable 101 cm

AE7
 Model CDA3122005C1
 Manufacturer Juwei
 Length of cable 101 cm

AE8
 Model CDA3122005C2
 Manufacturer Shenghua
 Length of cable 101 cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1/AE2 + AE3 + AE7	Charging mode
Set.2	EUT1+ AE1/AE2 + AE4 + AE7	Charging mode
Set.3	EUT1+ AE1/AE2 + AE7	USB mode

Note: During the tests, 1 SIM card and 1 micro-SD card were installed into EUT for all set-ups.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-10 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
5	Test Receiver	ESCI	100344	R&S	2013-03-28
6	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-07
7	Universal Radio Communication Tester	CMU200	100680	R&S	2013-09-05
8	PC	OPTIPLEX 755	3908243625	DELL	N/A
9	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A
10	Printer	LaserJet 1160	CNM2D33740	HP	N/A
11	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz IF Bandwidth	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Set.1 Charging mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2798.600	45.9	-26.3	33.3	38.938	VERTICAL
2793.600	45.9	-26.3	33.3	38.938	HORIZONTAL
2749.800	45.9	-27.1	33.3	39.685	VERTICAL
2805.000	45.9	-27.6	33.8	39.741	HORIZONTAL
2793.400	45.8	-26.3	33.3	38.838	VERTICAL
2799.000	45.8	-26.3	33.3	38.838	HORIZONTAL

Set.2 Charging mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2797.000	46.0	-26.3	33.3	39.038	VERTICAL
2797.200	46.0	-26.3	33.3	39.038	VERTICAL
2795.800	45.9	-26.3	33.3	38.938	VERTICAL
2771.400	45.8	-27.1	33.3	39.585	VERTICAL
2799.400	45.8	-26.3	33.3	38.838	HORIZONTAL
2794.600	45.8	-26.3	33.3	38.838	HORIZONTAL

Set.3 USB mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
3000.000	48.9	-28.4	34.1	43.172	VERTICAL
2999.800	47.8	-29.0	33.8	42.979	VERTICAL
2999.600	46.5	-29.0	33.8	41.679	VERTICAL
2799.000	46.0	-26.3	33.3	39.038	HORIZONTAL
2795.000	46.0	-26.3	33.3	39.038	HORIZONTAL
2803.600	45.9	-27.6	33.8	39.741	VERTICAL

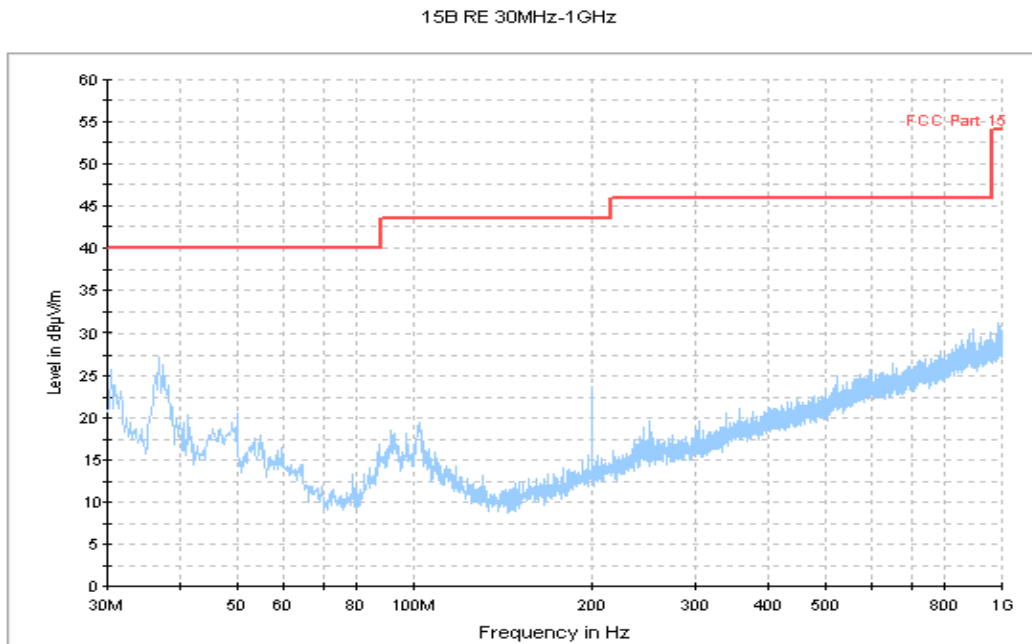


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

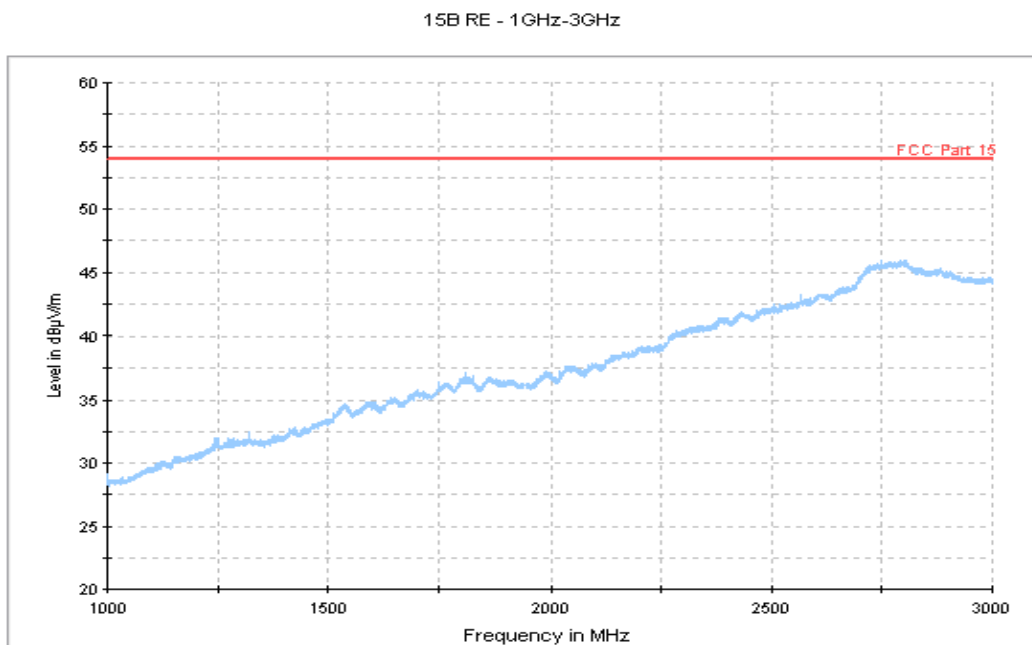


Figure A.2 Radiated Emission from 1GHz to 3GHz (Set.1, Charging mode)

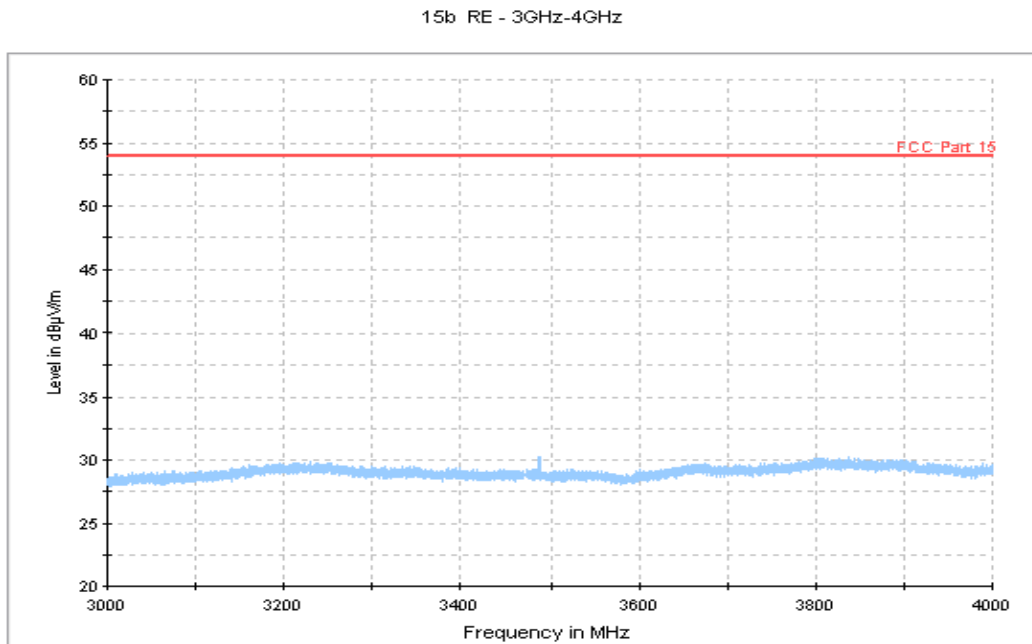


Figure A.3 Radiated Emission from 3GHz to 4GHz (Set.1, Charging mode)

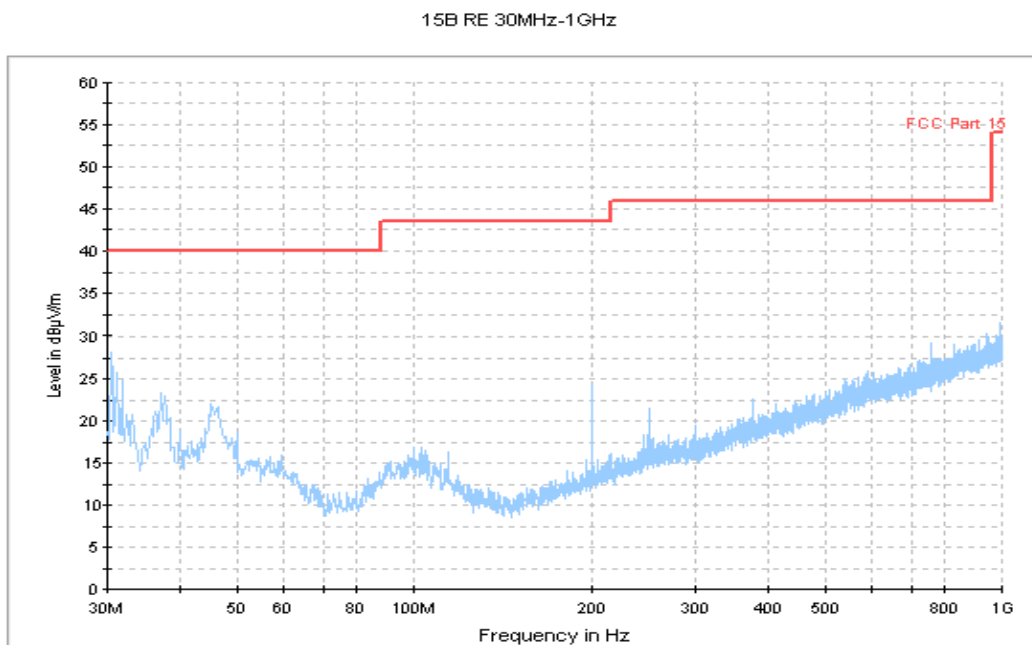


Figure A.4 Radiated Emission from 30MHz to 1GHz (Set.2, Charging mode)

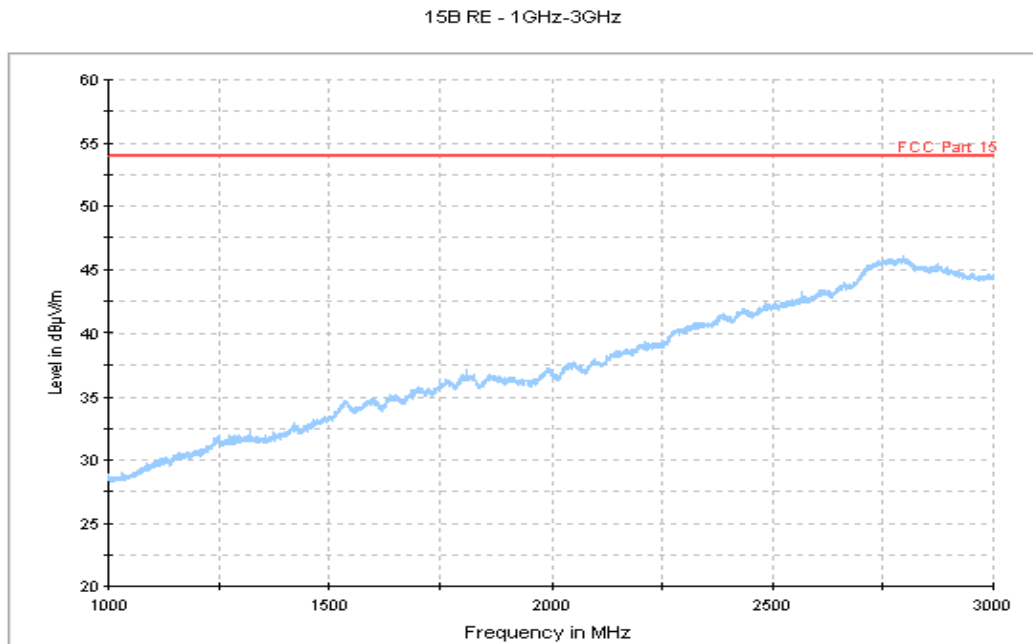


Figure A.5 Radiated Emission from 1GHz to 3GHz (Set.2, Charging mode)

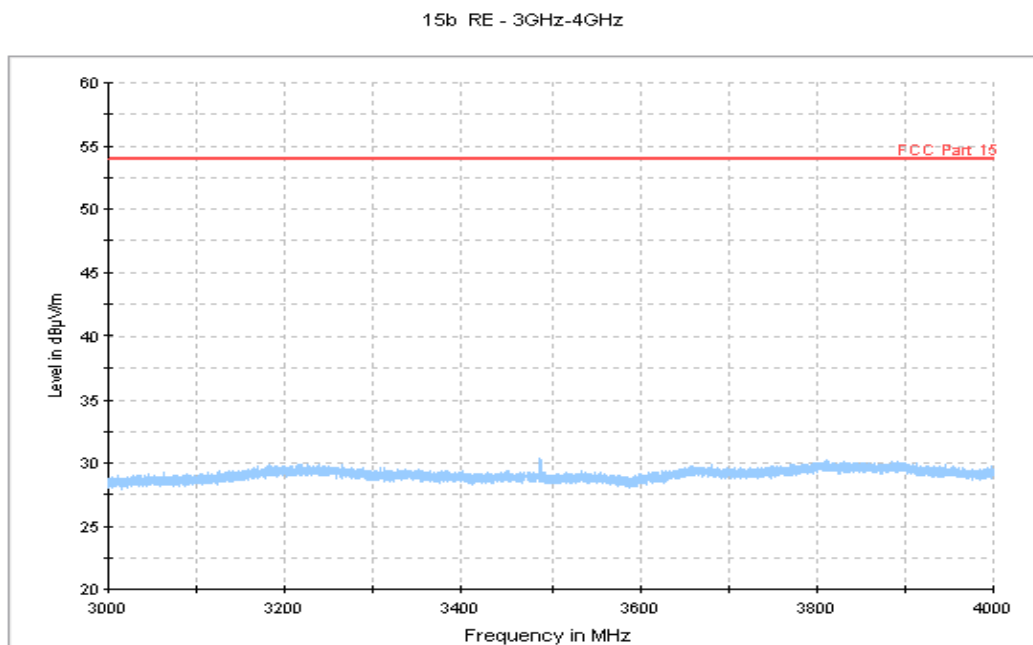


Figure A.6 Radiated Emission from 3GHz to 4GHz (Set.2, Charging mode)

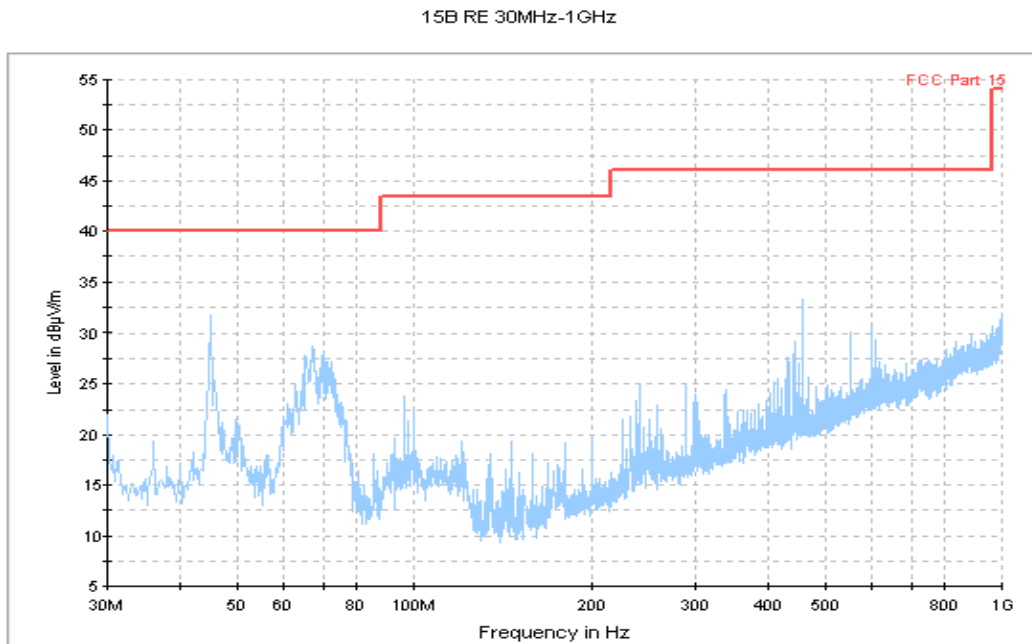


Figure A.7 Radiated Emission from 30MHz to 1GHz (Set.3, USB mode)

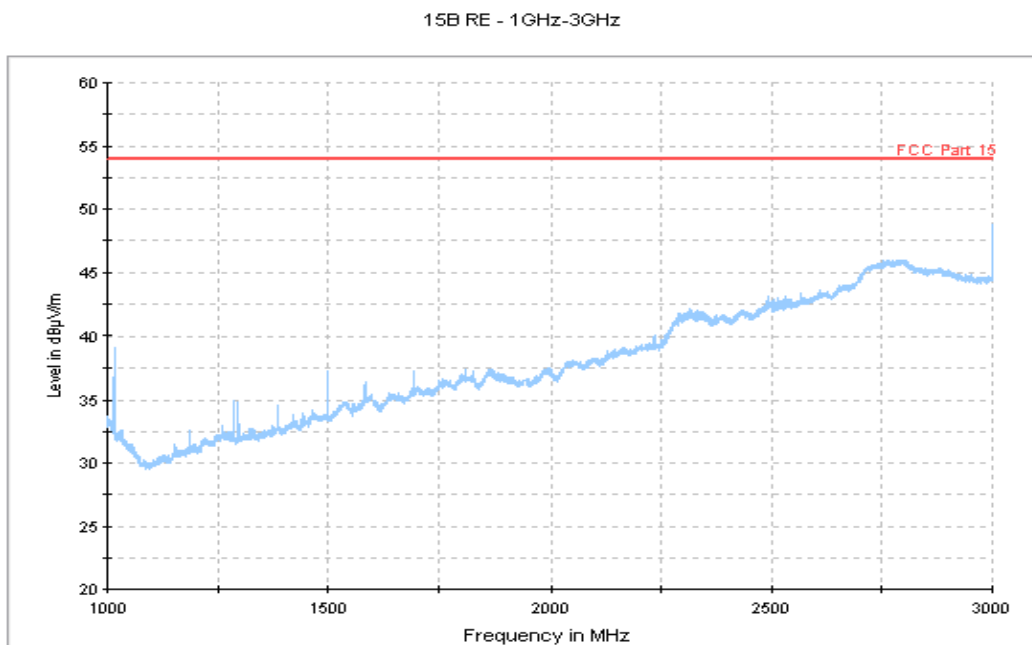


Figure A.8 Radiated Emission from 1GHz to 3GHz (Set.3, USB mode)

15b RE - 3GHz-4GHz

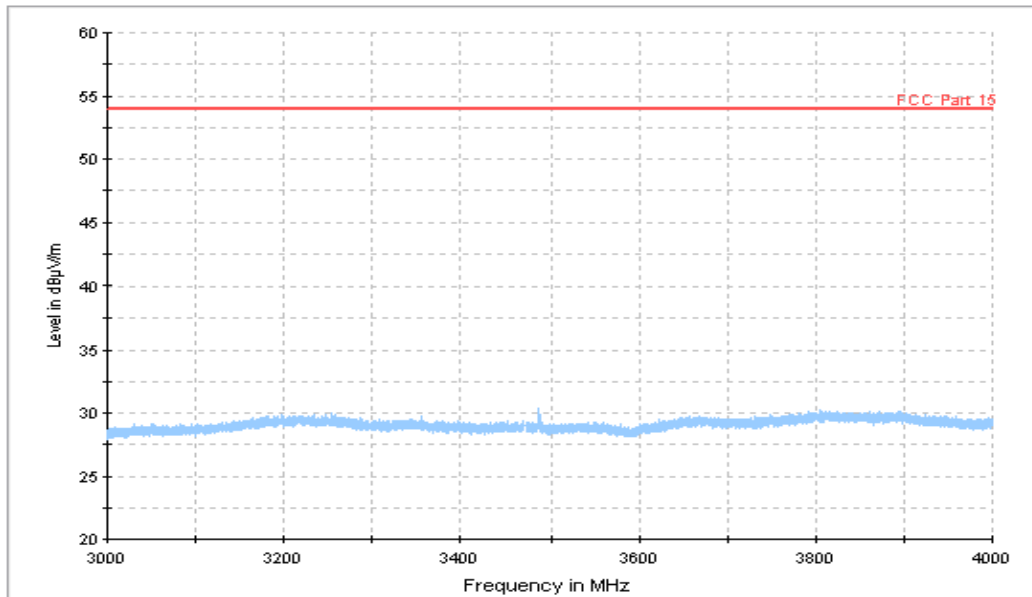


Figure A.9 Radiated Emission from 3GHz to 4GHz (Set.3, USB mode)

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

IF Bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

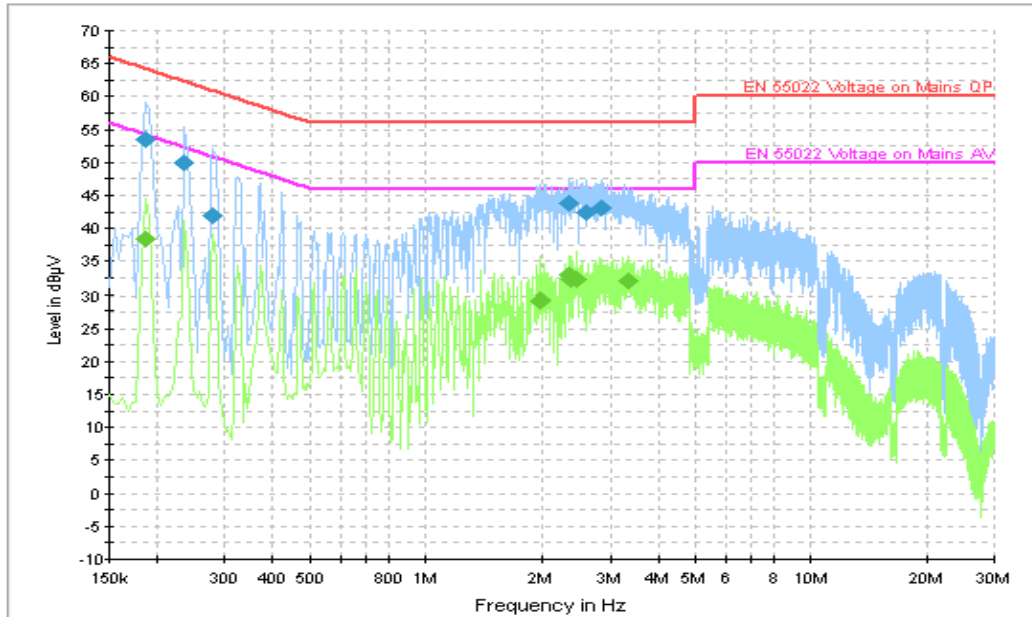


Figure A.10 Conducted Emission (Set.1, Charging mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	53.4	GND	L1	10.0	10.8	64.2
0.235500	49.9	GND	L1	10.0	12.4	62.3
0.280500	42.0	GND	L1	10.0	18.8	60.8
2.341500	43.8	GND	L1	10.0	12.2	56.0
2.584500	42.3	GND	L1	10.0	13.7	56.0
2.845500	43.1	GND	L1	10.0	12.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	38.4	GND	L1	10.0	15.8	54.2
1.963500	29.3	GND	L1	10.0	16.7	46.0
2.341500	32.9	GND	L1	10.0	13.1	46.0
2.364000	32.3	GND	L1	10.0	13.7	46.0
2.440500	32.1	GND	L1	10.0	13.9	46.0
3.331500	32.0	GND	L1	10.0	14.0	46.0

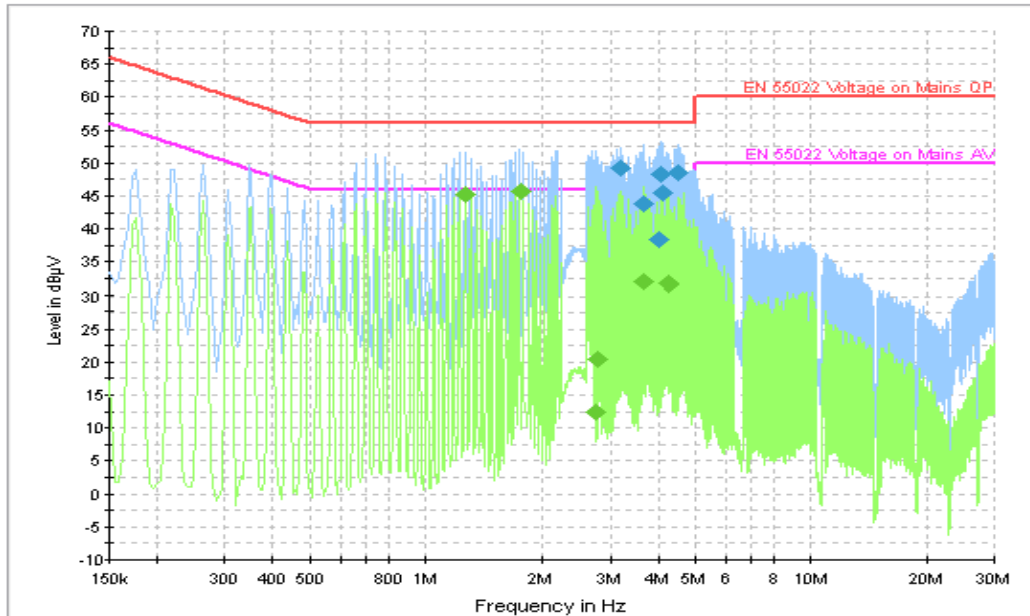


Figure A.11 Conducted Emission (Set.2, Charging mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.196500	49.3	GND	L1	10.0	6.7	56.0
3.678000	43.9	GND	L1	10.0	12.1	56.0
4.024500	38.4	GND	N	10.0	17.6	56.0
4.074000	48.3	GND	L1	10.0	7.7	56.0
4.119000	45.6	GND	L1	10.0	10.4	56.0
4.515000	48.5	GND	L1	10.0	7.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.270500	45.2	GND	L1	10.0	0.8	46.0
1.752000	45.7	GND	L1	10.0	0.3	46.0
2.733000	12.3	GND	L1	10.0	33.7	46.0
2.773500	20.5	GND	L1	10.0	25.5	46.0
3.678000	32.0	GND	L1	10.0	14.0	46.0
4.249500	31.8	GND	L1	10.0	14.2	46.0

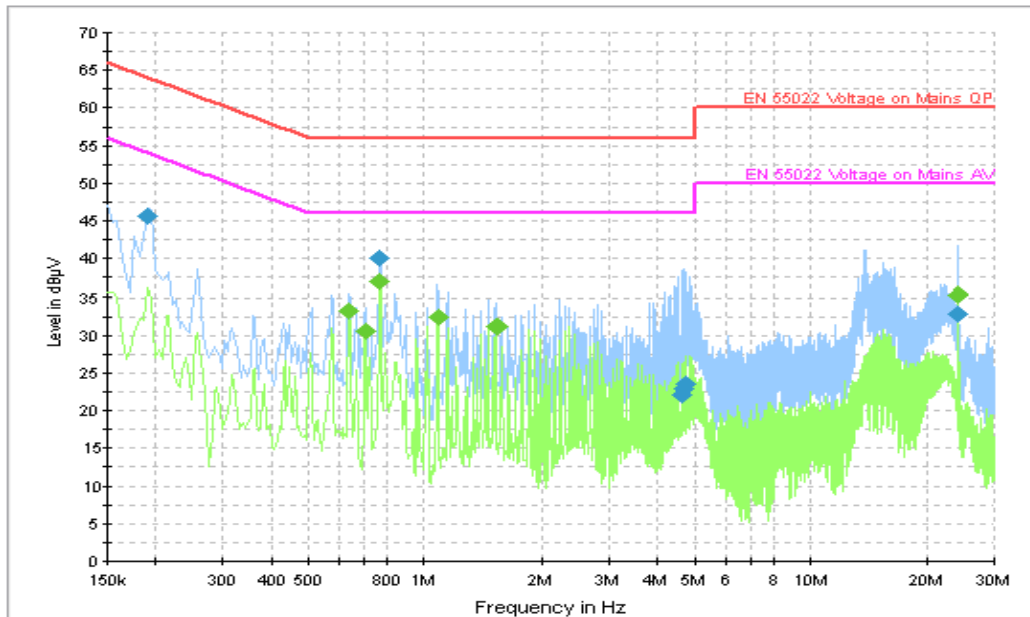


Figure A.12 Conducted Emission (Set.3, USB mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190500	45.6	GND	L1	10.0	18.4	64.0
0.766500	40.0	GND	N	10.0	16.0	56.0
4.614000	22.1	GND	N	10.0	33.9	56.0
4.686000	22.9	GND	N	10.0	33.1	56.0
4.758000	23.5	GND	N	10.0	32.5	56.0
24.058500	32.8	GND	N	9.6	27.2	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.636000	33.3	GND	N	10.0	12.7	46.0
0.703500	30.6	GND	N	10.0	15.4	46.0
0.766500	37.0	GND	L1	10.0	9.0	46.0
1.086000	32.3	GND	N	10.0	13.7	46.0
1.531500	31.2	GND	N	10.0	14.8	46.0
24.054000	35.3	GND	N	9.6	14.7	50.0

END OF REPORT