



SAR TEST REPORT

No. 2013SAR00029

For

TCT Mobile Limited

HSDPA/HSUPA/UMTS dual band / GSM quad bands mobile phone

Model name: Smart III 4

Marketing name: Vodafone 975

With

Hardware Version: PIO

Software Version: G6B

FCC ID: RAD351

Issued Date: 2013-03-12



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

Revision Version

| Report Number | Revision | Date | Memo |
|---------------|----------|------------|---------------------------------|
| 2013SAR00029 | 00 | 2013-03-12 | Initial creation of test report |

TABLE OF CONTENT

| | |
|--|-----------|
| 1 TEST LABORATORY | 5 |
| 1.1 TESTING LOCATION | 5 |
| 1.2 TESTING ENVIRONMENT..... | 5 |
| 1.3 PROJECT DATA | 5 |
| 1.4 SIGNATURE..... | 5 |
| 2 STATEMENT OF COMPLIANCE | 6 |
| 3 CLIENT INFORMATION..... | 7 |
| 3.1 APPLICANT INFORMATION | 7 |
| 3.2 MANUFACTURER INFORMATION | 7 |
| 4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 8 |
| 4.1 ABOUT EUT | 8 |
| 4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 8 |
| 4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 8 |
| 5 TEST METHODOLOGY | 9 |
| 5.1 APPLICABLE LIMIT REGULATIONS | 9 |
| 5.2 APPLICABLE MEASUREMENT STANDARDS..... | 9 |
| 6 SPECIFIC ABSORPTION RATE (SAR)..... | 10 |
| 6.1 INTRODUCTION..... | 10 |
| 6.2 SAR DEFINITION..... | 10 |
| 7 TISSUE SIMULATING LIQUIDS | 11 |
| 7.1 TARGETS FOR TISSUE SIMULATING LIQUID | 11 |
| 7.2 DIELECTRIC PERFORMANCE | 11 |
| 8 SYSTEM VERIFICATION..... | 15 |
| 8.1 SYSTEM SETUP..... | 15 |
| 8.2 SYSTEM VERIFICATION..... | 16 |
| 9 MEASUREMENT PROCEDURES | 17 |
| 9.1 TESTS TO BE PERFORMED | 17 |
| 9.2 GENERAL MEASUREMENT PROCEDURE..... | 18 |
| 9.3 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR | 19 |
| 9.4 POWER DRIFT..... | 20 |
| 10 AREA SCAN BASED 1-G SAR | 20 |
| 10.1 REQUIREMENT OF KDB..... | 20 |
| 10.2 FAST SAR ALGORITHMS | 20 |
| 11 CONDUCTED OUTPUT POWER..... | 21 |
| 11.1 MANUFACTURING TOLERANCE | 21 |
| 11.2 GSM MEASUREMENT RESULT | 23 |
| 11.3 WI-FI AND BT MEASUREMENT RESULT | 24 |

| | |
|---|-----------|
| 12 SIMULTANEOUS TX SAR CONSIDERATIONS | 26 |
| 12.1 INTRODUCTION..... | 26 |
| 12.2 TRANSMIT ANTENNA SEPARATION DISTANCES | 26 |
| 12.3 SAR MEASUREMENT POSITIONS | 26 |
| 12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 27 |
| 13 EVALUATION OF SIMULTANEOUS..... | 28 |
| 14 SAR TEST RESULT..... | 29 |
| 14.1 THE EVALUATION OF MULTI-BATTERIES | 29 |
| 14.2 SAR RESULTS FOR FAST SAR..... | 30 |
| 14.2 SAR RESULTS FOR STANDARD PROCEDURE | 33 |
| 15 SAR MEASUREMENT VARIABILITY..... | 34 |
| 16 MEASUREMENT UNCERTAINTY | 35 |
| 16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS | 35 |
| 16.2 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS | 36 |
| 17 MAIN TEST INSTRUMENTS | 37 |
| ANNEX A GRAPH RESULTS..... | 38 |
| ANNEX B SYSTEM VERIFICATION RESULTS..... | 50 |
| ANNEX C SAR MEASUREMENT SETUP | 57 |
| C.1 MEASUREMENT SET-UP | 57 |
| C.2 DASY4 OR DASY5 E-FIELD PROBE SYSTEM | 58 |
| C.3 E-FIELD PROBE CALIBRATION | 58 |
| C.4 OTHER TEST EQUIPMENT..... | 59 |
| C.4.1 DATA ACQUISITION ELECTRONICS(DAE) | 59 |
| C.4.2 ROBOT | 60 |
| C.4.3 MEASUREMENT SERVER | 60 |
| C.4.4 DEVICE HOLDER FOR PHANTOM..... | 61 |
| C.4.5 PHANTOM..... | 61 |
| ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM | 63 |
| D.1 GENERAL CONSIDERATIONS..... | 63 |
| D.2 BODY-WORN DEVICE | 64 |
| D.3 DESKTOP DEVICE..... | 64 |
| D.4 DUT SETUP PHOTOS..... | 65 |
| ANNEX E EQUIVALENT MEDIA RECIPES | 66 |
| ANNEX F SYSTEM VALIDATION | 67 |
| ANNEX G PROBE CALIBRATION CERTIFICATE | 68 |
| ANNEX H DIPOLE CALIBRATION CERTIFICATE..... | 79 |

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code: 100191
Telephone: +86-10-62304633
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω
Ambient noise & Reflection: < 0.012 W/kg

1.3 Project Data


Project Leader: Qi Dianyuan
Test Engineer: Lin Xiaojun
Testing Start Date: February 17, 2013
Testing End Date: February 19, 2013

1.4 Signature




Lin Xiaojun

(Prepared this test report)

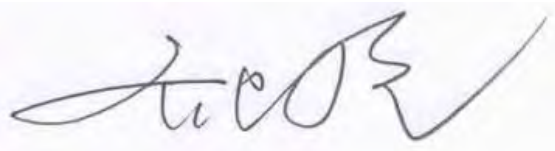

Qi Dianyuan

(Reviewed this test report)



Xiao Li

Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for TCT Mobile Limited HSDPA/HSUPA/UMTS dual band / GSM quad bands mobile phone Smart III 4 / Vodafone 975 are as follows:

Table 2.1: Max. Reported SAR (1g)

| Band | Position | Reported SAR 1g (W/Kg) |
|----------|----------|---------------------------|
| GSM 850 | Head | 0.53 |
| | Body | 1.02 |
| GSM 1900 | Head | 0.70 |
| | Body | 0.83 |
| Wi-Fi | Head | 0.06 |
| | Body | 0.29 |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. It is performed with microSD card during all testing.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The maximum reported SAR value is obtained at the case of (Table 2.1), and the values are: **1.02 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for GSM and WiFi

| | Position | GSM | WiFi | Sum |
|--|-------------------------|------|------|-------------|
| Maximum reported value for Head | Left hand, Touch cheek | 0.70 | 0.05 | 0.75 |
| | Right hand, Touch cheek | 0.53 | 0.06 | 0.59 |
| Maximum reported SAR value for Body | Toward Ground | 1.02 | 0.29 | 1.31 |

Table 2.3: The sum of reported SAR values for GSM and Bluetooth

| | Position | GSM | BT* | Sum |
|--|------------------------|------|-------|--------------|
| Maximum reported value for Head | Left hand, Touch cheek | 0.70 | 0.165 | 0.865 |
| Maximum reported SAR value for Body | Toward Ground | 1.02 | 0.165 | 1.185 |

According to the above tables, the maximum sum of reported SAR values is **1.31 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

3 Client Information

3.1 Applicant Information

| | |
|----------------|---|
| Company Name: | TCT Mobile Limited |
| Address /Post: | 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203 |
| City: | ShangHai |
| Postal Code: | 201203 |
| Country: | P.R.China |
| Contact: | Gong Zhizhou |
| Email: | zhizhou.gong@jrdcom.com |
| Telephone: | 0086-21-61460890 |
| Fax: | 0086-21-61460602 |

3.2 Manufacturer Information

| | |
|----------------|---|
| Company Name: | TCT Mobile Limited |
| Address /Post: | 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203 |
| City: | ShangHai |
| Postal Code: | 201203 |
| Country: | P.R.China |
| Contact: | Gong Zhizhou |
| Email: | zhizhou.gong@jrdcom.com |
| Telephone: | 0086-21-61460890 |
| Fax: | 0086-21-61460602 |

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

| | |
|---------------------------------------|---|
| Description: | HSDPA/HSUPA/UMTS dual band / GSM quad bands mobile phone |
| Model name: | Smart III 4 |
| Marketing name: | Vodafone 975 |
| Operating mode(s): | GSM 850/1900, BT, WiFi |
| Tested Tx Frequency: | 825 – 848.8 MHz (GSM 850) |
| | 1850.2 – 1910 MHz (GSM 1900) |
| | 2412 – 2462 MHz (Wi-Fi) |
| GPRS/EGPRS Multislot Class: | 12 |
| GPRS capability Class: | B |
| WCDMA UE Category: | 6 |
| Release Version: | GSM: R99 |
| | GPRS: Rel6 |
| | UMTS: R6 |
| Test device Production information: | Production unit |
| Device type: | Portable device |
| Antenna type: | Integrated antenna |
| Accessories/Body-worn configurations: | Headset |
| Hotspot mode: | Support simultaneous transmission of hotspot and voice(or data) |
| Form factor: | 12.3cm × 6.6 cm |

4.2 Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version |
|---------|-----------------|------------|------------|
| EUT1 | 869531010051013 | PIO | G6B |
| EUT2 | 869531010050965 | | |

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1 and conducted power with the EUT2.

4.3 Internal Identification of AE used during the test

| AE ID* | Description | Model | SN | Manufacturer |
|--------|-------------|--------------|----|--------------|
| AE1 | Battery | CAB32A0004C1 | / | BYD |
| AE2 | Battery | CAB32A0004C2 | / | SCUD |
| AE3 | Headset | CCB3000A12C1 | / | shunda |
| AE4 | Headset | CCB3000A12C2 | / | juwei |

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IC RSS-102 ISSUE4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

KDB447498 D01: General RF Exposure Guidance v05: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D06 Hot Spot SAR v01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

865664 D01 SAR measurement 100 MHz to 6 GHz v01: SAR Measurement Requirements for 100 MHz to 6 GHz

865664 D02 SAR Reporting v01: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid


Table 7.1: Targets for tissue simulating liquid

| Frequency (MHz) | Liquid Type | Conductivity (σ) | $\pm 5\%$ Range | Permittivity (ϵ) | $\pm 5\%$ Range |
|-----------------|-------------|---------------------------|-----------------|-----------------------------|-----------------|
| 835 | Head | 0.90 | 0.86~0.95 | 41.5 | 39.4~43.6 |
| 835 | Body | 0.97 | 0.92~1.02 | 55.2 | 52.4~58.0 |
| 1900 | Head | 1.40 | 1.33~1.47 | 40.0 | 38.0~42.0 |
| 1900 | Body | 1.52 | 1.44~1.60 | 53.3 | 50.6~56.0 |
| 2450 | Head | 1.80 | 1.71~1.89 | 39.2 | 37.2~41.2 |
| 2450 | Body | 1.95 | 1.85~2.05 | 52.7 | 50.1~55.3 |

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid


| Measurement Date (yyyy-mm-dd) | Type | Frequency | Permittivity ϵ | Drift (%) | Conductivity σ (S/m) | Drift (%) |
|-------------------------------|------|-----------|-------------------------|-----------|-----------------------------|-----------|
| 2013-02-18 | Head | 835 MHz | 40.52 | -2.36 | 0.883 | -1.89 |
| | Body | 835 MHz | 56.29 | 1.97 | 0.988 | 1.86 |
| 2013-02-19 | Head | 1900 MHz | 39.16 | -2.10 | 1.418 | 1.29 |
| | Body | 1900 MHz | 52.61 | -1.29 | 1.539 | 1.25 |
| 2013-02-17 | Head | 2450 MHz | 38.87 | -0.84 | 1.843 | 2.39 |
| | Body | 2450 MHz | 52.26 | -0.83 | 1.968 | 0.92 |

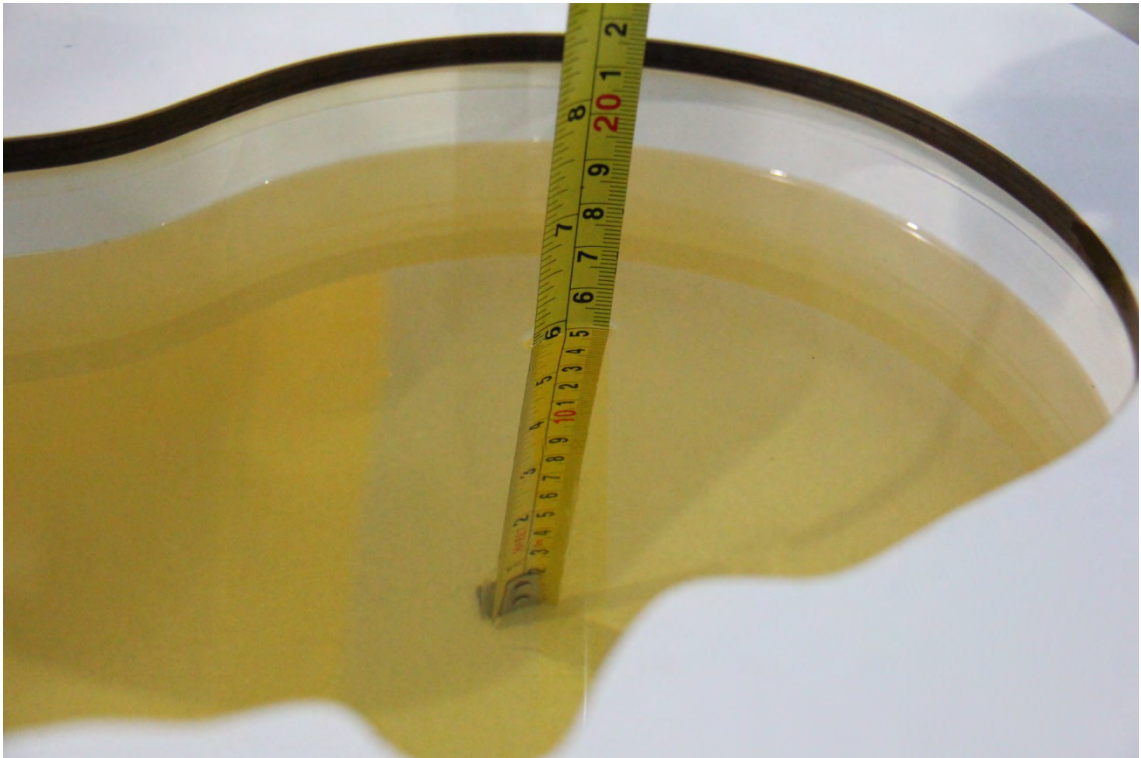


Picture 7-1: Liquid depth in the Head Phantom (835 MHz)




Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)

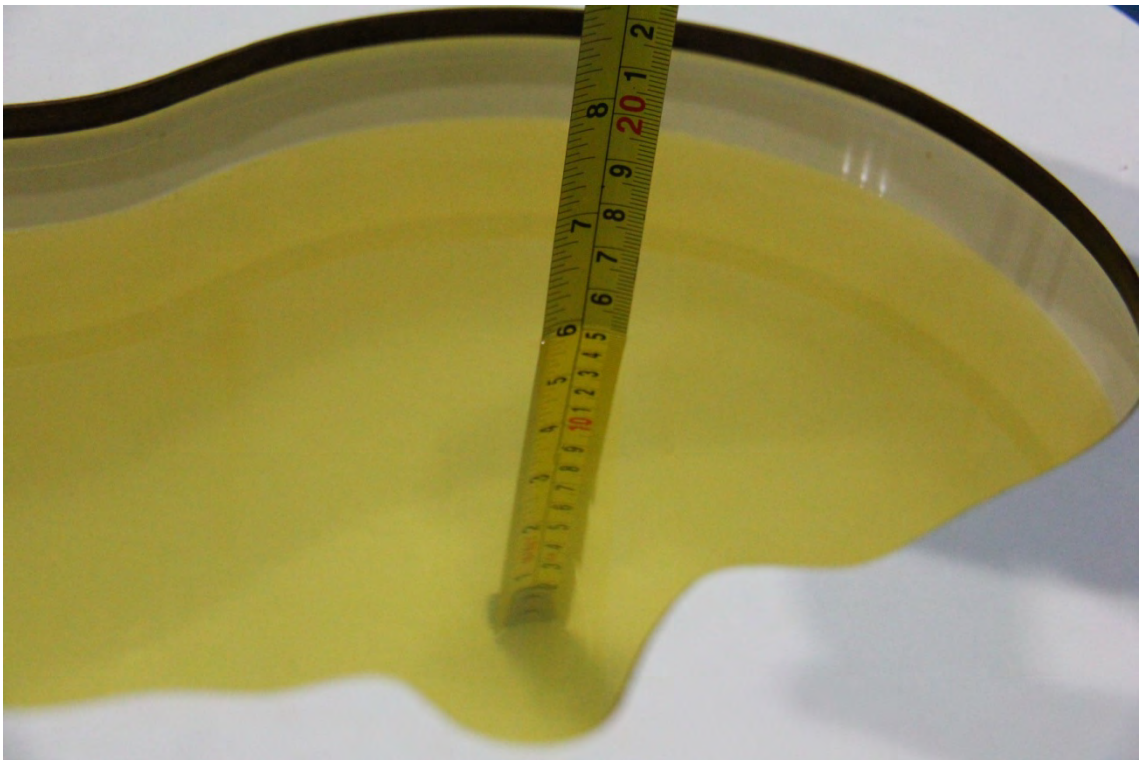


Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

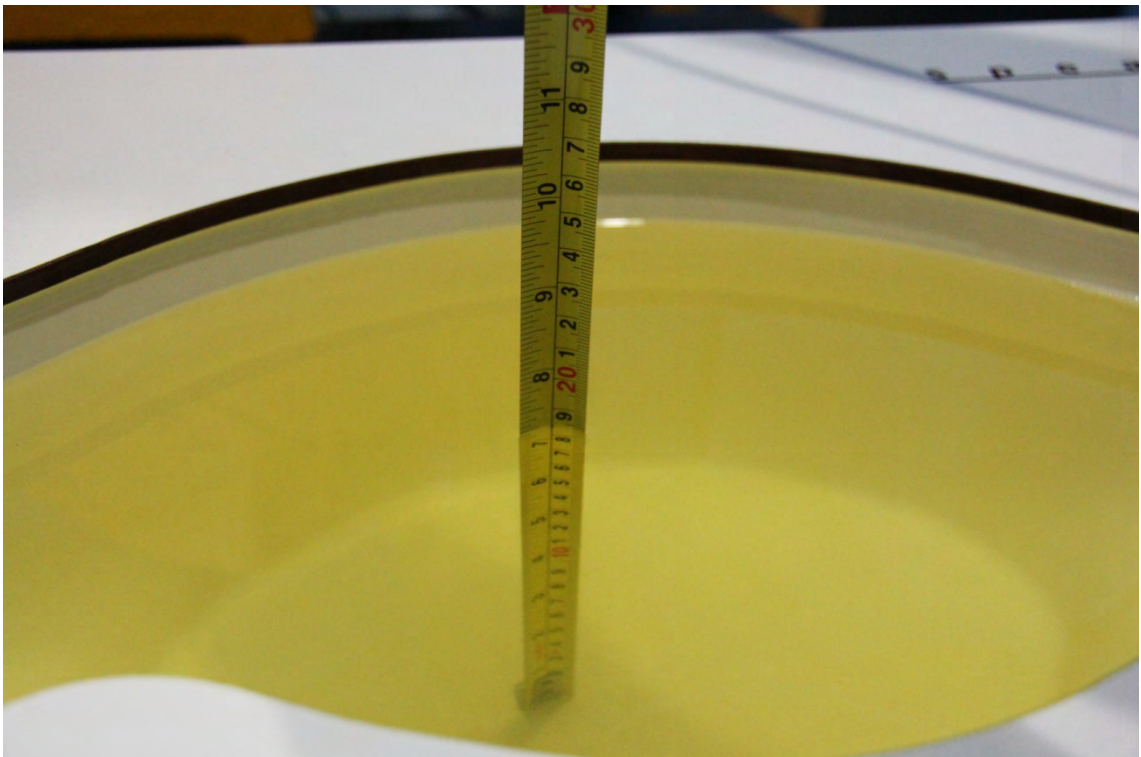

Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

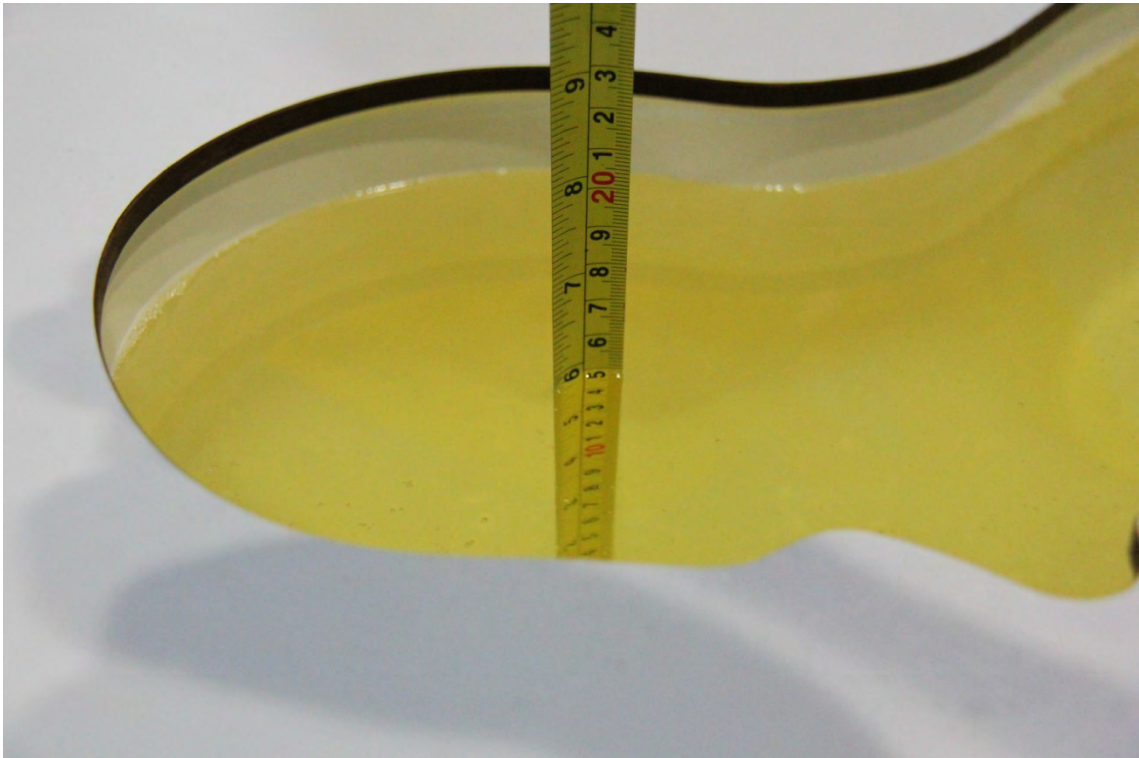

Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

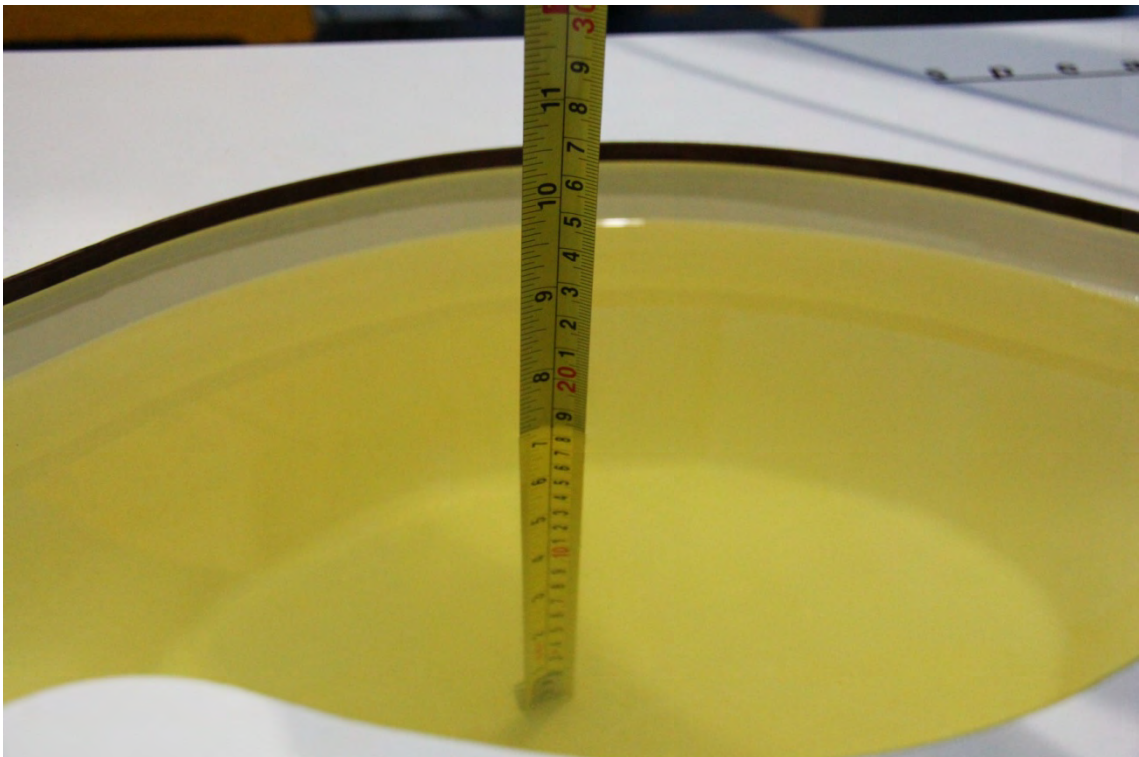


Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

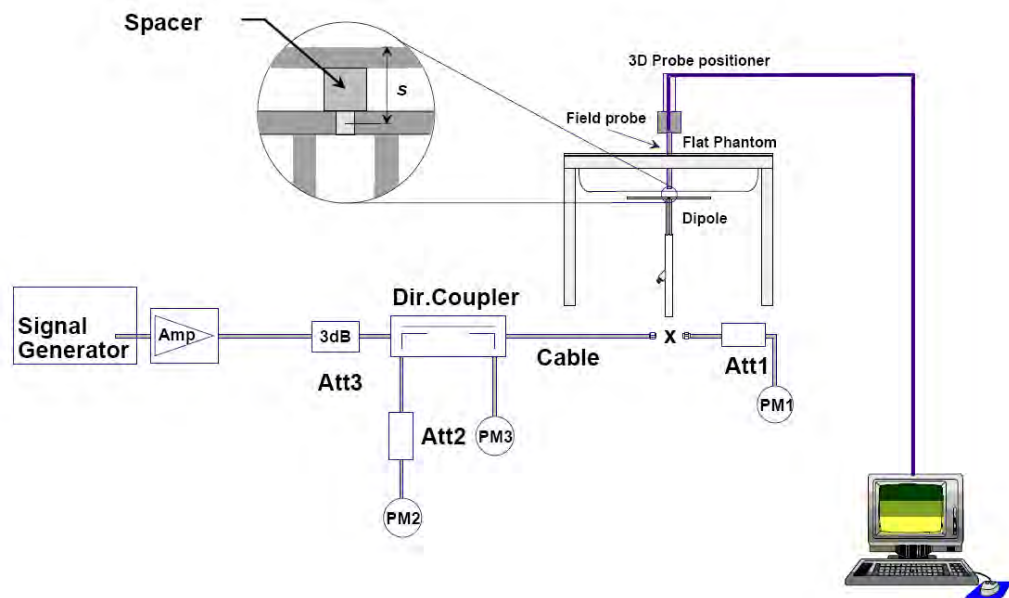

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

| Measurement Date (yyyy-mm-dd) | Frequency | Target value (W/kg) | | Measured value (W/kg) | | Deviation | |
|----------------------------------|-----------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|
| | | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average |
| 2013-02-18 | 835 MHz | 6.07 | 9.30 | 6.20 | 9.60 | 2.14% | 3.23% |
| 2013-02-19 | 1900 MHz | 20.6 | 39.1 | 20.32 | 38.68 | -1.36% | -1.07% |
| 2013-02-17 | 2450 MHz | 24.4 | 52.4 | 23.92 | 52.40 | -1.97% | 0.00% |

Table 8.2: System Verification of Body

| Measurement Date (yyyy-mm-dd) | Frequency | Target value (W/kg) | | Measured value (W/kg) | | Deviation | |
|----------------------------------|-----------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|
| | | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average |
| 2013-02-18 | 835 MHz | 6.20 | 9.36 | 6.32 | 9.56 | 1.94% | 2.14% |
| 2013-02-19 | 1900 MHz | 21.3 | 39.9 | 21.72 | 40.80 | 1.97% | 2.26% |
| 2013-02-17 | 2450 MHz | 23.6 | 50.4 | 23.80 | 51.20 | 0.85% | 1.59% |

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

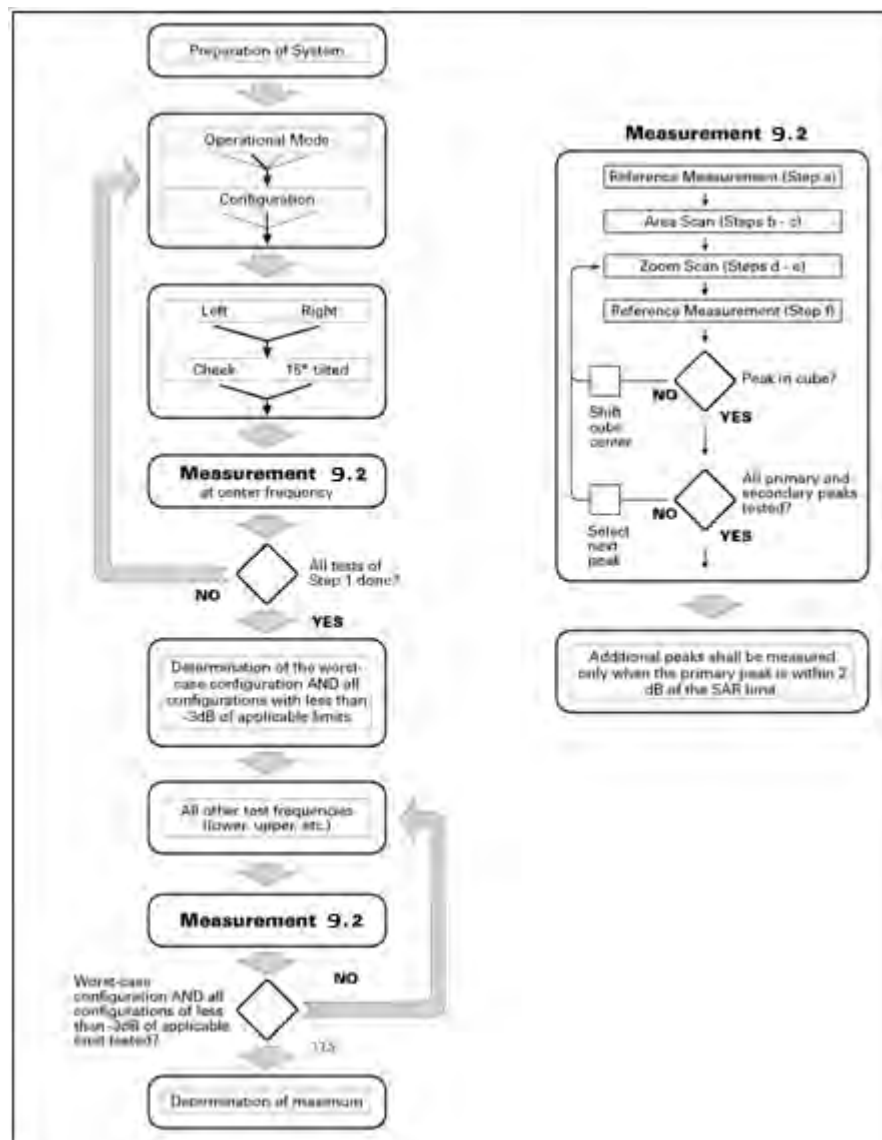

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

| | | | | |
|---|------------------------------------|--|--|--|
| | | | $\leq 3\text{ GHz}$ | $> 3\text{ GHz}$ |
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | | | $5 \pm 1\text{ mm}$ | $\frac{1}{4}\delta\ln(2) \pm 0.5\text{ mm}$ |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | | | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | | | $\leq 2\text{ GHz: } \leq 15\text{ mm}$ $2 - 3\text{ GHz: } \leq 12\text{ mm}$ | $3 - 4\text{ GHz: } \leq 12\text{ mm}$ $4 - 6\text{ GHz: } \leq 10\text{ mm}$ |
| | | | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |
| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | | $\leq 2\text{ GHz: } \leq 8\text{ mm}$ $2 - 3\text{ GHz: } \leq 5\text{ mm}^*$ | $3 - 4\text{ GHz: } \leq 5\text{ mm}^*$ $4 - 6\text{ GHz: } \leq 4\text{ mm}^*$ |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | | $\leq 5\text{ mm}$ | $3 - 4\text{ GHz: } \leq 4\text{ mm}$ $4 - 5\text{ GHz: } \leq 3\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$ |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | $\leq 4\text{ mm}$ | $3 - 4\text{ GHz: } \leq 3\text{ mm}$ $4 - 5\text{ GHz: } \leq 2.5\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$ |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | | $\geq 30\text{ mm}$ | $3 - 4\text{ GHz: } \geq 28\text{ mm}$ $4 - 5\text{ GHz: } \geq 25\text{ mm}$ $5 - 6\text{ GHz: } \geq 22\text{ mm}$ |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. | | | | |
| * When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4\text{ W/kg}$, $\leq 8\text{ mm}$, $\leq 7\text{ mm}$ and $\leq 5\text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

9.3 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.4 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.17 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

| GSM 850 | | | |
|----------------------|-------------|-------------|-------------|
| Channel | Channel 251 | Channel 190 | Channel 128 |
| Target (dBm) | 32.3 | 32.3 | 32.3 |
| Tolerance \pm (dB) | 1 | 1 | 1 |
| GSM 1900 | | | |
| Channel | Channel 810 | Channel 661 | Channel 512 |
| Target (dBm) | 29.3 | 29.3 | 29.3 |
| Tolerance \pm (dB) | 1 | 1 | 1 |

Table 11.2: GPRS and EGPRS (GMSK Modulation)

| GSM 850 GPRS | | | | |
|---------------|----------------------|------|------|------|
| Channel | | 251 | 190 | 128 |
| 1 Txslot | Target (dBm) | 32.3 | 32.3 | 32.3 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 2 Txslots | Target (dBm) | 29 | 29 | 29 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 3Txslots | Target (dBm) | 27.2 | 27.2 | 27.2 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 4 Txslots | Target (dBm) | 26 | 26 | 26 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| GSM 850 EGPRS | | | | |
| Channel | | 251 | 190 | 128 |
| 1 Txslot | Target (dBm) | 32.3 | 32.3 | 32.3 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 2 Txslots | Target (dBm) | 29 | 29 | 29 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 3Txslots | Target (dBm) | 27.2 | 27.2 | 27.2 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 4 Txslots | Target (dBm) | 26 | 26 | 26 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| GSM 1900 GPRS | | | | |
| Channel | | 810 | 661 | 512 |
| 1 Txslot | Target (dBm) | 29.3 | 29.3 | 29.3 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 2 Txslots | Target (dBm) | 26 | 26 | 26 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 3Txslots | Target (dBm) | 24.2 | 24.2 | 24.2 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |

| | | | | |
|----------------|----------------------|------------|------------|------------|
| 4 Txslots | Target (dBm) | 23 | 23 | 23 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| GSM 1900 EGPRS | | | | |
| Channel | | 810 | 661 | 512 |
| 1 Txslot | Target (dBm) | 29.3 | 29.3 | 29.3 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 2 Txslots | Target (dBm) | 26 | 26 | 26 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 3Txslots | Target (dBm) | 24.2 | 24.2 | 24.2 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |
| 4 Txslots | Target (dBm) | 23 | 23 | 23 |
| | Tolerance \pm (dB) | 1 | 1 | 1 |

Table 11.3: Bluetooth

| Mode | Channel | Target (dBm) | Tolerance \pm (dB) |
|---------------|---------|--------------|----------------------|
| GFSK | 0 | 7 | 1 |
| | 39 | 6 | 1 |
| | 78 | 4.5 | 1 |
| EDR2M-4_DQPSK | 0 | 6 | 3 |
| | 39 | 4.5 | 3 |
| | 78 | 3 | 3 |
| EDR3M-8DPSK | 0 | 6 | 3 |
| | 39 | 4.5 | 3 |
| | 78 | 3 | 3 |

Table 11.4: WiFi

| Mode | Channel | Target (dBm) | Tolerance \pm (dB) |
|--------------------------------|---------|--------------|----------------------|
| 802.11 b | 1 | 15.5 | 1 |
| | 6 | 15.5 | 1 |
| | 11 | 15.5 | 1 |
| 802.11 g | 1 | 13.5 | 1 |
| | 6 | 13.5 | 1 |
| | 11 | 13.5 | 1 |
| 802.11 n – HT20 | 1 | 11 | 1 |
| | 6 | 11 | 1 |
| | 11 | 11 | 1 |
| 802.11 n – HT40 (MCS0~MCS3) | 1 | 9.5 | 1 |
| | 6 | 9.5 | 1 |
| | 11 | 9.5 | 1 |
| 802.11 n – HT40 (MCS4~MCS7) | 1 | 8.5 | 1 |
| | 6 | 8.5 | 1 |
| | 11 | 8.5 | 1 |

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.5: The conducted power measurement results for GSM850/1900

| GSM 850MHZ | Conducted Power (dBm) | | |
|----------------|------------------------|-----------------------|------------------------|
| | Channel 251(848.8MHz) | Channel 190(836.6MHz) | Channel 128(824.2MHz) |
| | 32.27 | 32.31 | 32.32 |
| GSM 1900MHZ | Conducted Power (dBm) | | |
| | Channel 810(1909.8MHz) | Channel 661(1880MHz) | Channel 512(1850.2MHz) |
| | 29.16 | 29.13 | 29.06 |

Table 11.6: The conducted power measurement results for GPRS and EGPRS

| GSM 850 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|------------------|----------------------|-------|-------|-------------|----------------------|-------|-------|
| | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1 Txslot | 32.27 | 32.30 | 32.33 | -9.03dB | 23.24 | 23.27 | 23.30 |
| 2 Txslots | 28.40 | 28.45 | 28.48 | -6.02dB | 22.38 | 22.43 | 22.46 |
| 3Txslots | 26.68 | 26.69 | 26.67 | -4.26dB | 22.42 | 22.43 | 22.41 |
| 4 Txslots | 25.48 | 25.45 | 25.46 | -3.01dB | 22.47 | 22.44 | 22.45 |
| GSM 850 EGPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1 Txslot | 32.26 | 32.29 | 32.31 | -9.03dB | 23.23 | 23.26 | 23.28 |
| 2 Txslots | 28.39 | 28.44 | 28.46 | -6.02dB | 22.37 | 22.42 | 22.44 |
| 3Txslots | 26.68 | 26.65 | 26.64 | -4.26dB | 22.42 | 22.39 | 22.38 |
| 4 Txslots | 25.47 | 25.46 | 25.45 | -3.01dB | 22.46 | 22.45 | 22.44 |
| PCS1900 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1 Txslot | 29.13 | 29.09 | 29.03 | -9.03dB | 20.10 | 20.06 | 20.00 |
| 2 Txslots | 25.75 | 25.63 | 25.59 | -6.02dB | 19.73 | 19.61 | 19.57 |
| 3Txslots | 23.92 | 23.79 | 23.68 | -4.26dB | 19.66 | 19.53 | 19.42 |
| 4 Txslots | 22.88 | 22.73 | 22.61 | -3.01dB | 19.87 | 19.72 | 19.60 |
| PCS1900 EGPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1 Txslot | 29.15 | 29.09 | 29.03 | -9.03dB | 20.12 | 20.06 | 20.00 |
| 2 Txslots | 25.78 | 25.66 | 25.58 | -6.02dB | 19.76 | 19.64 | 19.56 |
| 3Txslots | 23.93 | 23.79 | 23.67 | -4.26dB | 19.67 | 19.53 | 19.41 |
| 4 Txslots | 22.88 | 22.74 | 22.61 | -3.01dB | 19.87 | 19.73 | 19.60 |

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 1Txslots for GSM850 and GSM1900.

Note: According to the KDB941225 D03, “when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used”.

11.3 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

| Mode | Peak Conducted Power (dBm) | | |
|---------------|----------------------------|----------------------|----------------------|
| | Channel 0 (2402MHz) | Channel 39 (2441MHz) | Channel 78 (2480MHz) |
| GFSK | 7.88 | 6.27 | 4.78 |
| EDR2M-4_DQPSK | 7.62 | 6.01 | 4.50 |
| EDR3M-8DPSK | 7.96 | 6.33 | 4.82 |

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

| Channel\data rate | 1Mbps | 2Mbps | 5.5Mbps | 11Mbps |
|-------------------|-------|-------|---------|--------|
| 1 | 16.23 | 16.14 | 16.08 | 15.89 |
| 6 | 16.36 | 16.29 | 16.27 | 16.01 |
| 11 | 15.82 | 15.77 | 15.70 | 15.51 |

802.11g (dBm)

| Channel\data rate | 6Mbps | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
|-------------------|-------|-------|--------|--------|--------|--------|--------|--------|
| 1 | 14.42 | 14.29 | 14.19 | 13.94 | 13.76 | 13.45 | 13.19 | 13.05 |
| 6 | 14.50 | 14.41 | 14.33 | 14.16 | 13.78 | 13.47 | 13.21 | 13.10 |
| 11 | 14.11 | 13.82 | 13.91 | 13.54 | 13.37 | 13.06 | 12.80 | 12.68 |

802.11n (dBm) - HT20

| Channel\data rate | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1 | 11.57 | 11.34 | 11.19 | 11.04 | 10.71 | 10.47 | 10.39 | 10.27 |
| 6 | 11.63 | 11.50 | 11.35 | 11.21 | 10.95 | 10.57 | 10.46 | 10.34 |
| 11 | 11.19 | 11.02 | 10.90 | 10.74 | 10.55 | 10.24 | 10.12 | 10.03 |

802.11n (dBm) - HT40

| Channel\data rate | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
|-------------------|-------|------|------|------|------|------|------|------|
| 1 | 10.27 | 9.95 | 9.66 | 9.12 | 8.71 | 8.39 | 8.26 | 8.11 |
| 6 | 10.11 | 9.83 | 9.56 | 9.28 | 8.90 | 8.59 | 8.46 | 8.13 |
| 11 | 9.85 | 9.54 | 9.16 | 8.88 | 8.47 | 8.15 | 8.02 | 7.87 |

The peak conducted power for Wi-Fi is as following:

802.11b (dBm)

| Channel\data rate | 1Mbps | 2Mbps | 5.5Mbps | 11Mbps |
|-------------------|-------|-------|---------|--------|
| 1 | 19.85 | 19.83 | 21.39 | 22.67 |
| 6 | / | / | / | 22.80 |
| 11 | / | / | / | 22.48 |

802.11g (dBm)

| Channel\data rate | 6Mbps | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
|-------------------|-------|-------|--------|--------|--------|--------|--------|--------|
| 1 | 22.87 | 22.81 | 22.64 | 22.66 | 23.09 | 23.06 | 22.89 | 22.92 |
| 6 | / | / | / | / | 23.16 | / | / | / |
| 11 | / | / | / | / | 22.76 | / | / | / |

802.11n (dBm) - HT20

| Channel\data rate | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1 | 20.11 | 19.91 | 19.86 | 20.36 | 20.30 | 20.39 | 20.28 | 20.20 |
| 6 | / | / | / | / | / | 20.50 | / | / |
| 11 | / | / | / | / | / | 19.96 | / | / |

802.11n (dBm) - HT40

| Channel\data rate | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1 | 18.89 | 18.75 | 18.52 | 18.94 | 18.93 | 18.97 | 18.95 | 18.91 |
| 6 | / | / | / | / | / | 19.06 | / | / |
| 11 | / | / | / | / | / | 18.71 | / | / |


SAR is not required for 802.11g channels if the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for “802.11b, 1Mbps, channel 6”.

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

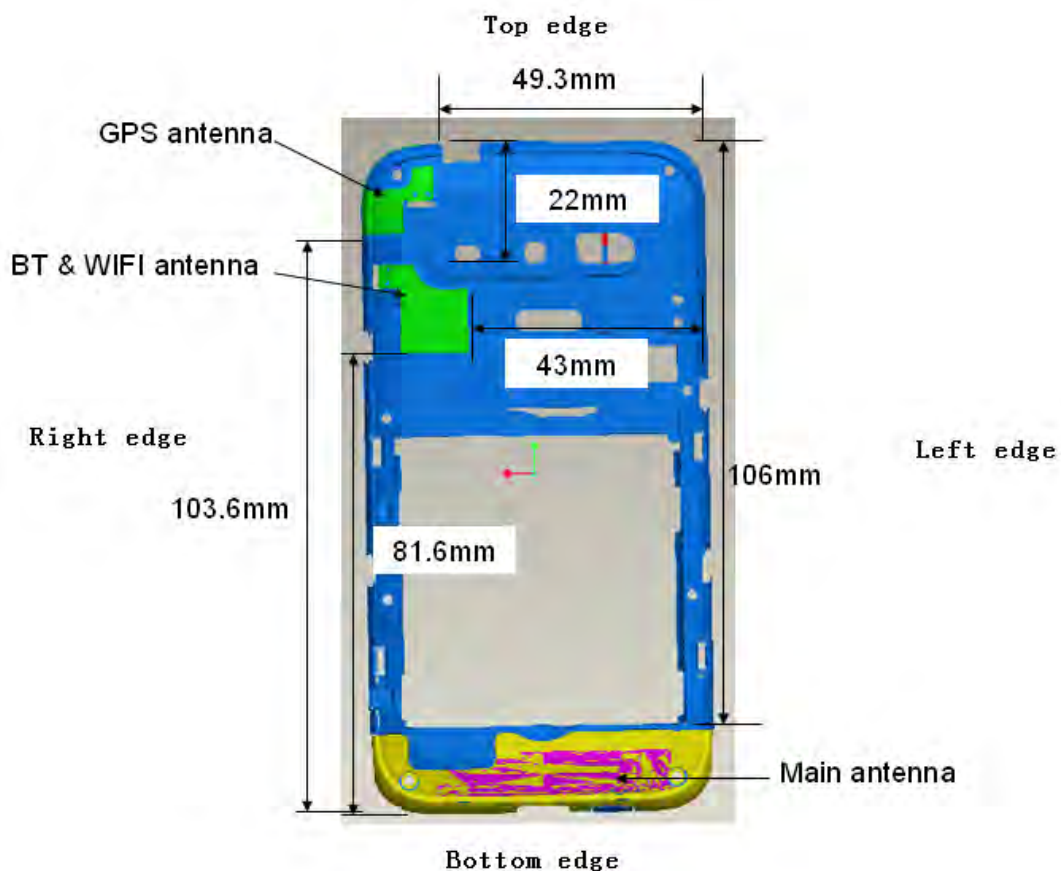

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

| SAR measurement positions | | | | | | |
|---------------------------|-------|------|-----------|------------|----------|-------------|
| Mode | Front | Rear | Left edge | Right edge | Top edge | Bottom edge |
| GSM850/1900 | Yes | Yes | Yes | Yes | No | Yes |
| WLAN | Yes | Yes | No | Yes | Yes | No |

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 10m test separation distances is 19mW.

Appendix A

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

| MHz | 5 | 10 | 15 | 20 | 25 | mm |
|------|----|----|-----|-----|-----|---|
| 150 | 39 | 77 | 116 | 155 | 194 | SAR Test Exclusion Threshold (mW) |
| 300 | 27 | 55 | 82 | 110 | 137 | |
| 450 | 22 | 45 | 67 | 89 | 112 | |
| 835 | 16 | 33 | 49 | 66 | 82 | |
| 900 | 16 | 32 | 47 | 63 | 79 | |
| 1500 | 12 | 24 | 37 | 49 | 61 | |
| 1900 | 11 | 22 | 33 | 44 | 54 | |
| 2450 | 10 | 19 | 29 | 38 | 48 | |
| 3600 | 8 | 16 | 24 | 32 | 40 | |
| 5200 | 7 | 13 | 20 | 26 | 33 | |
| 5400 | 6 | 13 | 19 | 26 | 32 | |
| 5800 | 6 | 12 | 19 | 25 | 31 | |

Picture 12.2 Power Thresholds

Table 12.1: Standalone SAR test exclusion considerations

| Band/Mode | F(GHz) | SAR test exclusion threshold (mW) | RF output power | | SAR test exclusion |
|----------------------|--------|--------------------------------------|-----------------|-------|-----------------------|
| | | | dBm | mW | |
| Bluetooth | 2.441 | 19 | 7.96 | 6.25 | No |
| 2.4GHz WLAN 802.11 b | 2.45 | 19 | 16.36 | 43.25 | Yes |

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for GSM and WiFi

| | Position | GSM | WiFi | Sum |
|--|-------------------------|------|------|-------------|
| Maximum reported value for Head | Left hand, Touch cheek | 0.70 | 0.05 | 0.75 |
| | Right hand, Touch cheek | 0.53 | 0.06 | 0.59 |
| Maximum reported SAR value for Body | Toward Ground | 1.02 | 0.29 | 1.31 |

Table 13.2: The sum of reported SAR values for GSM and Bluetooth

| | Position | GSM | BT* | Sum |
|--|------------------------|------|-------|--------------|
| Maximum reported value for Head | Left hand, Touch cheek | 0.70 | 0.165 | 0.865 |
| Maximum reported SAR value for Body | Toward Ground | 1.02 | 0.165 | 1.185 |

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

| Mode/Band | F (GHz) | Distance (mm) | Upper limit of power * | | Estimated _{1g} (W/kg) |
|-----------|---------|---------------|------------------------|------|-----------------------------------|
| | | | dBm | mW | |
| Bluetooth | 2.441 | 10 | 9 | 7.94 | 0.165 |

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) · [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is $< 1.6\text{W/kg}$. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The Reported SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

| | Duty Cycle |
|----------------------------|------------|
| Speech for GSM850/1900 | 1:8.3 |
| GPRS&EGPRS for GSM850/1900 | 1:8.3 |
| WiFi | 1:1 |

14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.2: The evaluation of multi-batteries for Head Test

| Frequency | | Side | Test Position | Battery Type | SAR(1g) | Power Drift(dB) |
|-----------|-----|------|---------------|--------------|---------|-----------------|
| MHz | Ch. | | | | (W/kg) | |
| 1880 | 661 | Left | Touch | CAB32A0004C1 | 0.535 | 0.08 |
| 1880 | 661 | Left | Touch | CAB32A0004C2 | 0.523 | 0.05 |

Note: According to the values in the above table, the battery, CAB32A0004C1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.3: The evaluation of multi-batteries for Body Test

| Frequency | | Test Position | Spacing (mm) | Battery Type | SAR(1g) | Power Drift(dB) |
|-----------|-----|---------------|--------------|--------------|---------|-----------------|
| MHz | Ch. | | | | (W/kg) | |
| 848.8 | 251 | Ground | 10 | CAB32A0004C1 | 0.805 | -0.04 |
| 848.8 | 251 | Ground | 10 | CAB32A0004C2 | 0.758 | 0.02 |

Note: According to the values in the above table, the battery, CAB32A0004C1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

14.2 SAR results for Fast SAR

Table 14.4: SAR Values (GSM 850 MHz Band - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.4 °C | | | | | Liquid Temperature: 21.9 °C | | | | | |
|------------------------------|-----|-------|---------------|------------|-----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | Left | Touch | / | 32.27 | 0.316 | 0.40 | 0.420 | 0.53 | -0.00 |
| 836.6 | 190 | Left | Touch | / | 32.31 | 0.260 | 0.33 | 0.377 | 0.47 | 0.11 |
| 824.2 | 128 | Left | Touch | / | 32.32 | 0.240 | 0.30 | 0.349 | 0.44 | -0.10 |
| 848.8 | 251 | Left | Tilt | / | 32.27 | 0.192 | 0.24 | 0.277 | 0.35 | -0.03 |
| 836.6 | 190 | Left | Tilt | / | 32.31 | 0.177 | 0.22 | 0.255 | 0.32 | 0.04 |
| 824.2 | 128 | Left | Tilt | / | 32.32 | 0.163 | 0.20 | 0.234 | 0.29 | 0.01 |
| 848.8 | 251 | Right | Touch | Fig.1 | 32.27 | 0.319 | 0.40 | 0.421 | 0.53 | 0.09 |
| 836.6 | 190 | Right | Touch | / | 32.31 | 0.262 | 0.33 | 0.379 | 0.48 | -0.11 |
| 824.2 | 128 | Right | Touch | / | 32.32 | 0.237 | 0.30 | 0.343 | 0.43 | 0.03 |
| 848.8 | 251 | Right | Tilt | / | 32.27 | 0.204 | 0.26 | 0.296 | 0.38 | 0.04 |
| 836.6 | 190 | Right | Tilt | / | 32.31 | 0.186 | 0.23 | 0.269 | 0.34 | 0.11 |
| 824.2 | 128 | Right | Tilt | / | 32.32 | 0.171 | 0.21 | 0.247 | 0.31 | 0.03 |

Table 14.5: SAR Values (GSM 850 MHz Band - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.4 °C | | | | | Liquid Temperature: 21.9 °C | | | | | |
|------------------------------|-----|----------------------------------|----------------------|---------------|-----------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|
| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 836.6 | 190 | GPRS (1) | Phantom | / | 32.30 | 0.287 | 0.36 | 0.411 | 0.52 | -0.03 |
| 848.8 | 251 | GPRS (1) | Ground | Fig.2 | 32.27 | 0.607 | 0.77 | 0.805 | 1.02 | -0.04 |
| 836.6 | 190 | GPRS (1) | Ground | / | 32.30 | 0.527 | 0.66 | 0.760 | 0.96 | 0.17 |
| 824.2 | 128 | GPRS (1) | Ground | / | 32.33 | 0.508 | 0.64 | 0.732 | 0.92 | -0.10 |
| 836.6 | 190 | GPRS (1) | Left | / | 32.30 | 0.295 | 0.37 | 0.435 | 0.55 | -0.02 |
| 836.6 | 190 | GPRS (1) | Right | / | 32.30 | 0.292 | 0.37 | 0.386 | 0.49 | -0.03 |
| 836.6 | 190 | GPRS (1) | Bottom | / | 32.30 | 0.018 | 0.02 | 0.027 | 0.03 | -0.12 |
| 848.8 | 251 | EGPRS (1) | Ground | / | 32.26 | 0.590 | 0.75 | 0.787 | 1.00 | -0.01 |
| 848.8 | 251 | Speech | Ground (Headset1) | / | 32.27 | 0.382 | 0.48 | 0.509 | 0.65 | -0.11 |
| 848.8 | 251 | Speech | Ground (Headset2) | / | 32.27 | 0.460 | 0.58 | 0.608 | 0.77 | 0.02 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3000A12C1, the type of Headset2 is CCB3000A12C2.

Table 14.6: SAR Values (GSM 1900 MHz Band - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.3 °C | | | | | Liquid Temperature: 21.8 °C | | | | | |
|------------------------------|-----|-------|---------------|------------|-----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 1909.8 | 810 | Left | Touch | / | 29.16 | 0.255 | 0.33 | 0.460 | 0.60 | -0.17 |
| 1880 | 661 | Left | Touch | Fig.3 | 29.13 | 0.309 | 0.40 | 0.535 | 0.70 | 0.08 |
| 1850.2 | 512 | Left | Touch | / | 29.06 | 0.276 | 0.37 | 0.491 | 0.65 | -0.01 |
| 1909.8 | 810 | Left | Tilt | / | 29.16 | 0.090 | 0.12 | 0.161 | 0.21 | 0.08 |
| 1880 | 661 | Left | Tilt | / | 29.13 | 0.097 | 0.13 | 0.167 | 0.22 | 0.04 |
| 1850.2 | 512 | Left | Tilt | / | 29.06 | 0.093 | 0.12 | 0.158 | 0.21 | 0.05 |
| 1909.8 | 810 | Right | Touch | / | 29.16 | 0.108 | 0.14 | 0.184 | 0.24 | 0.15 |
| 1880 | 661 | Right | Touch | / | 29.13 | 0.134 | 0.18 | 0.215 | 0.28 | 0.11 |
| 1850.2 | 512 | Right | Touch | / | 29.06 | 0.120 | 0.16 | 0.202 | 0.27 | 0.11 |
| 1909.8 | 810 | Right | Tilt | / | 29.16 | 0.089 | 0.12 | 0.161 | 0.21 | -0.07 |
| 1880 | 661 | Right | Tilt | / | 29.13 | 0.105 | 0.14 | 0.188 | 0.25 | 0.05 |
| 1850.2 | 512 | Right | Tilt | / | 29.06 | 0.099 | 0.13 | 0.172 | 0.23 | 0.07 |

Table 14.7: SAR Values (GSM 1900 MHz Band - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.3 °C | | | | | Liquid Temperature: 21.8 °C | | | | | |
|------------------------------|-----|----------------------------------|----------------------|---------------|-----------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|
| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 1880 | 661 | GPRS (1) | Phantom | / | 29.09 | 0.272 | 0.36 | 0.467 | 0.62 | -0.03 |
| 1909.8 | 810 | GPRS (1) | Ground | Fig.4 | 29.13 | 0.378 | 0.49 | 0.633 | 0.83 | 0.08 |
| 1880 | 661 | GPRS (1) | Ground | / | 29.09 | 0.355 | 0.47 | 0.622 | 0.82 | -0.19 |
| 1850.2 | 512 | GPRS (1) | Ground | / | 29.03 | 0.351 | 0.47 | 0.614 | 0.82 | 0.02 |
| 1880 | 661 | GPRS (1) | Left | / | 29.09 | 0.110 | 0.15 | 0.196 | 0.26 | 0.12 |
| 1880 | 661 | GPRS (1) | Right | / | 29.09 | 0.052 | 0.07 | 0.090 | 0.12 | -0.10 |
| 1880 | 661 | GPRS (1) | Bottom | / | 29.09 | 0.084 | 0.11 | 0.149 | 0.20 | -0.11 |
| 1909.8 | 810 | EGPRS (1) | Ground | / | 29.15 | 0.377 | 0.49 | 0.630 | 0.82 | -0.01 |
| 1909.8 | 810 | Speech | Ground (Headset1) | / | 29.16 | 0.230 | 0.30 | 0.374 | 0.49 | 0.07 |
| 1909.8 | 810 | Speech | Ground (Headset2) | / | 29.16 | 0.226 | 0.29 | 0.377 | 0.49 | 0.03 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The type of Headset1 is CCB3000A12C1, the type of Headset2 is CCB3000A12C2.

Table 14.8: SAR Values (Wi-Fi 802.11b - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.6°C | | | | | Liquid Temperature: 22.0°C | | | | | |
|-----------------------------|-----|-------|---------------|------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 2437 | 6 | Left | Touch | / | 16.36 | 0.025 | 0.03 | 0.053 | 0.05 | 0.11 |
| 2437 | 6 | Left | Tilt | / | 16.36 | 0.022 | 0.02 | 0.044 | 0.05 | 0.13 |
| 2437 | 6 | Right | Touch | Fig.5 | 16.36 | 0.030 | 0.03 | 0.060 | 0.06 | 0.16 |
| 2437 | 6 | Right | Tilt | / | 16.36 | 0.025 | 0.03 | 0.050 | 0.05 | -0.10 |

Table 14.9: SAR Values (Wi-Fi 802.11b - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.6 °C | | | | | Liquid Temperature: 22.0 °C | | | | |
|------------------------------|-----|---------------|------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | |
| 2437 | 6 | Phantom | / | 16.36 | 0.00751 | 0.01 | 0.015 | 0.02 | -0.10 |
| 2437 | 6 | Ground | Fig.6 | 16.36 | 0.132 | 0.14 | 0.276 | 0.29 | 0.18 |
| 2437 | 6 | Right | / | 16.36 | 0.031 | 0.03 | 0.065 | 0.07 | 0.19 |
| 2437 | 6 | Top | / | 16.36 | 0.028 | 0.03 | 0.053 | 0.05 | -0.03 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.10: SAR Values (GSM 1900 MHz Band - Head) with battery CAB32A0004C2

| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|------|---------------|------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 1880 | 661 | Left | Touch | / | 29.13 | 0.301 | 0.39 | 0.523 | 0.68 | 0.05 |

Table 14.11: SAR Values (GSM 850 MHz Band - Body) with battery CAB32A0004C2

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|----------------------------|---------------|------------|-----------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | GPRS (1) | Ground | / | 32.27 | 0.571 | 0.72 | 0.758 | 0.96 | 0.02 |

Note: The distance between the EUT and the phantom bottom is 10mm.

14.2 SAR results for Standard procedure

There is not zoom scan measurement to be added except the highest measured SAR in each exposure configuration and band, because all SAR values are < 1.2 W/kg.

Table 14.12: SAR Values (GSM 850 MHz Band - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.4 °C | | | | | Liquid Temperature: 21.9 °C | | | | | |
|------------------------------|-----|-------|---------------|------------|-----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | Right | Touch | Fig.1 | 32.27 | 0.319 | 0.40 | 0.421 | 0.53 | 0.09 |

Table 14.13: SAR Values (GSM 850 MHz Band - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.4 °C | | | | | Liquid Temperature: 21.9 °C | | | | | |
|------------------------------|-----|----------------------------------|------------------|---------------|-----------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|
| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | GPRS (1) | Ground | Fig.2 | 32.27 | 0.607 | 0.77 | 0.805 | 1.02 | -0.04 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.14: SAR Values (GSM 1900 MHz Band - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.3 °C | | | | | Liquid Temperature: 21.8 °C | | | | | |
|------------------------------|-----|------|---------------|------------|-----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 1880 | 661 | Left | Touch | Fig.3 | 29.13 | 0.309 | 0.40 | 0.535 | 0.70 | 0.08 |

Table 14.15: SAR Values (GSM 1900 MHz Band - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.3 °C | | | | | Liquid Temperature: 21.8 °C | | | | | |
|------------------------------|-----|----------------------------------|------------------|---------------|-----------------------------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------|
| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 1909.8 | 810 | GPRS (1) | Ground | Fig.4 | 29.13 | 0.378 | 0.49 | 0.633 | 0.83 | 0.08 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.16: SAR Values (Wi-Fi 802.11b - Head) with battery CAB32A0004C1

| Ambient Temperature: 22.6°C | | | | | Liquid Temperature: 22.0°C | | | | | |
|-----------------------------|-----|-------|---------------|------------|----------------------------|--------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Side | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | | |
| 2437 | 6 | Right | Touch | Fig.5 | 16.36 | 0.030 | 0.03 | 0.060 | 0.06 | 0.16 |

Table 14.17: SAR Values (Wi-Fi 802.11b - Body) with battery CAB32A0004C1

| Ambient Temperature: 22.6 °C | | | | | Liquid Temperature: 22.0 °C | | | | |
|------------------------------|-----|---------------|------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------------|------------------|
| Frequency | | Test Position | Figure No. | Conducted Power (dBm) | Measured SAR(10g) (W/kg) | Reported SAR(10g) (W/kg) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
| MHz | Ch. | | | | | | | | |
| 2437 | 6 | Ground | Fig.6 | 16.36 | 0.132 | 0.14 | 0.276 | 0.29 | 0.18 |

Note1: The distance between the EUT and the phantom bottom is 10mm.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body GSM 850 (1g)

| Frequency | | Test Position | Spacing (mm) | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio | Second Repeated SAR (W/kg) |
|-----------|-----|---------------|--------------|---------------------|---------------------------|-----------|----------------------------|
| MHz | Ch. | | | | | | |
| 848.8 | 251 | Ground | 10 | 0.805 | 0.799 | 1.01 | / |

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests

| No. | Error Description | Type | Uncertainty value | Probably Distribution | Div. | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|---|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| Measurement system | | | | | | | | | | |
| 1 | Probe calibration | B | 5.5 | N | 1 | 1 | 1 | 5.5 | 5.5 | ∞ |
| 2 | Isotropy | B | 4.7 | R | $\sqrt{3}$ | 0.7 | 0.7 | 1.9 | 1.9 | ∞ |
| 3 | Boundary effect | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 4 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 | ∞ |
| 5 | Detection limit | B | 1.0 | N | 1 | 1 | 1 | 0.6 | 0.6 | ∞ |
| 6 | Readout electronics | B | 0.3 | R | $\sqrt{3}$ | 1 | 1 | 0.3 | 0.3 | ∞ |
| 7 | Response time | B | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| 8 | Integration time | B | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | 1.5 | ∞ |
| 9 | RF ambient conditions-noise | B | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| 10 | RF ambient conditions-reflection | B | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| 11 | Probe positioned mech. restrictions | B | 0.4 | R | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 | ∞ |
| 12 | Probe positioning with respect to phantom shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 13 | Post-processing | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Test sample related | | | | | | | | | | |
| 14 | Test sample positioning | A | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 | 71 |
| 15 | Device holder uncertainty | A | 3.4 | N | 1 | 1 | 1 | 3.4 | 3.4 | 5 |
| 16 | Drift of output power | B | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and set-up | | | | | | | | | | |
| 17 | Phantom uncertainty | B | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| 18 | Liquid conductivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| 19 | Liquid conductivity (meas.) | A | 2.06 | N | 1 | 0.64 | 0.43 | 1.32 | 0.89 | 43 |
| 20 | Liquid permittivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| 21 | Liquid permittivity (meas.) | A | 1.6 | N | 1 | 0.6 | 0.49 | 1.0 | 0.8 | 521 |

| | | | | | | | | |
|--|---|--|--|--|--|------|------|-----|
| Combined standard uncertainty | $u'_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ | | | | | 9.25 | 9.12 | 257 |
| Expanded uncertainty (confidence interval of 95 %) | $u_e = 2u_c$ | | | | | 18.5 | 18.2 | |

16.2 Measurement Uncertainty for Fast SAR Tests

| No. | Error Description | Type | Uncertainty value | Probably Distribution | Div. | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------|---|------|-------------------|-----------------------|------------|---------|----------|----------------|-----------------|-------------------|
| Measurement system | | | | | | | | | | |
| 1 | Probe calibration | B | 5.5 | N | 1 | 1 | 1 | 5.5 | 5.5 | ∞ |
| 2 | Isotropy | B | 4.7 | R | $\sqrt{3}$ | 0.7 | 0.7 | 1.9 | 1.9 | ∞ |
| 3 | Boundary effect | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 4 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 | ∞ |
| 5 | Detection limit | B | 1.0 | N | 1 | 1 | 1 | 0.6 | 0.6 | ∞ |
| 6 | Readout electronics | B | 0.3 | R | $\sqrt{3}$ | 1 | 1 | 0.3 | 0.3 | ∞ |
| 7 | Response time | B | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| 8 | Integration time | B | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | 1.5 | ∞ |
| 9 | RF ambient conditions-noise | B | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| 10 | RF ambient conditions-reflection | B | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| 11 | Probe positioned mech. Restrictions | B | 0.4 | R | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 | ∞ |
| 12 | Probe positioning with respect to phantom shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 13 | Post-processing | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 14 | Fast SAR z-Approximation | B | 7.0 | R | $\sqrt{3}$ | 1 | 1 | 4.0 | 4.0 | ∞ |
| Test sample related | | | | | | | | | | |
| 15 | Test sample positioning | A | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 | 71 |
| 16 | Device holder uncertainty | A | 3.4 | N | 1 | 1 | 1 | 3.4 | 3.4 | 5 |
| 17 | Drift of output power | B | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and set-up | | | | | | | | | | |
| 18 | Phantom uncertainty | B | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| 19 | Liquid conductivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |

| | | | | | | | | | | |
|--|------------------------------|---|------|---|------------|------|------|------|------|----------|
| 20 | Liquid conductivity (meas.) | A | 2.06 | N | 1 | 0.64 | 0.43 | 1.32 | 0.89 | 43 |
| 21 | Liquid permittivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| 22 | Liquid permittivity (meas.) | A | 1.6 | N | 1 | 0.6 | 0.49 | 1.0 | 0.8 | 521 |
| Combined standard uncertainty | | $u'_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$ | | | | | | 10.1 | 9.95 | 257 |
| Expanded uncertainty (confidence interval of 95 %) | | $u_e = 2u_c$ | | | | | | 20.2 | 19.9 | |

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|---------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | E5071C | MY46110673 | February 15, 2013 | One year |
| 02 | Power meter | NRVD | 102083 | September 11, 2012 | One year |
| 03 | Power sensor | NRV-Z5 | 100542 | | |
| 04 | Signal Generator | E4438C | MY49070393 | November 13, 2012 | One Year |
| 05 | Amplifier | VTL5400 | 0505 | No Calibration Requested | |
| 06 | BTS | E5515C | MY48363198 | July 11, 2012 | One year |
| 07 | E-field Probe | SPEAG ES3DV3 | 3149 | April 24, 2012 | One year |
| 08 | DAE | SPEAG DAE4 | 771 | November 20, 2012 | One year |
| 09 | Dipole Validation Kit | SPEAG D835V2 | 443 | May 03, 2012 | One year |
| 10 | Dipole Validation Kit | SPEAG D1900V2 | 541 | May 09, 2012 | One year |
| 11 | Dipole Validation Kit | SPEAG D2450V2 | 853 | May 02, 2012 | One year |

END OF REPORT BODY

ANNEX A GRAPH RESULTS

850 Right Cheek High

Date: 2013-2-18

Electronics: DAE4 Sn771

Medium: Head 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 40.338$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

Cheek High/Area Scan (61x101x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.439 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.121 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.440 W/kg

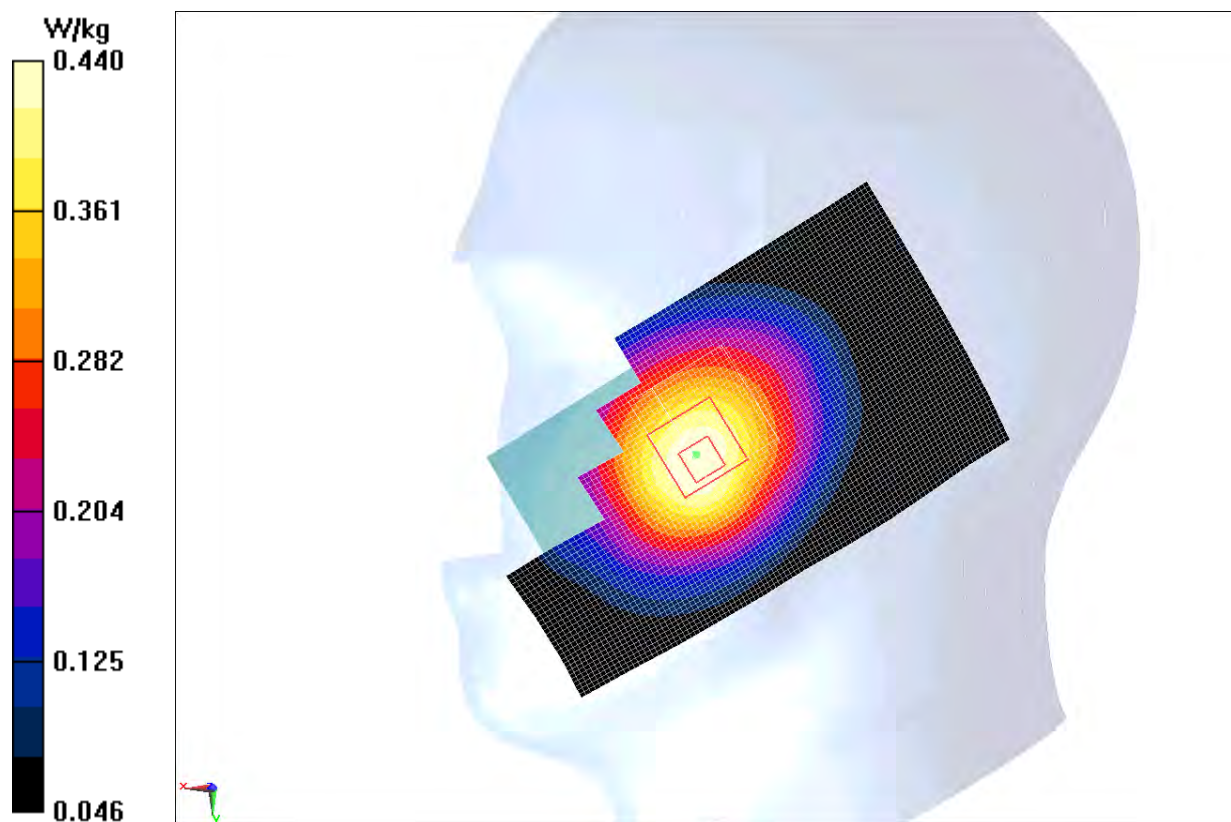


Fig. A.1 850 MHz CH251

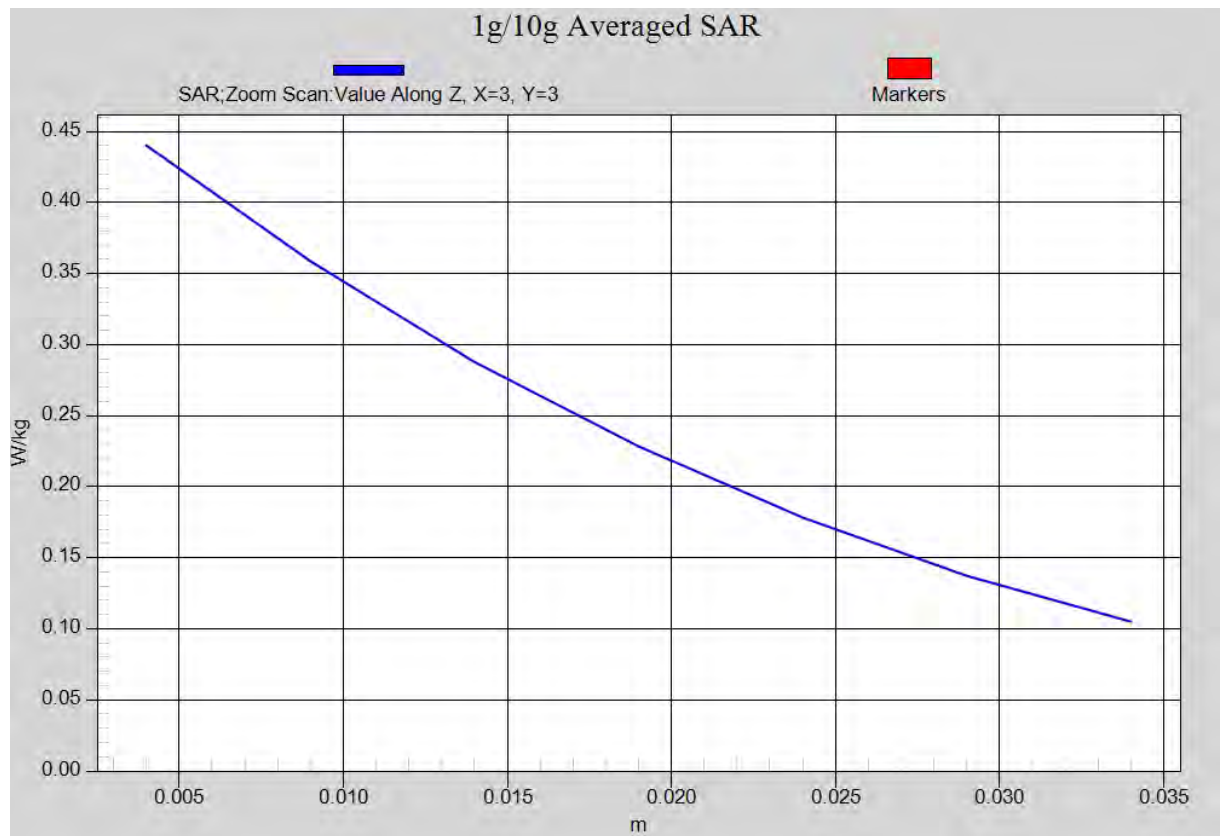


Fig. A.1-1 Z-Scan at power reference point (850 MHz CH251)

850 Body Toward Ground High with GPRS

Date: 2013-2-18

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 56.161$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Toward Ground High/Area Scan (61x101x1): Measurement grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.841 W/kg

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.407 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.607 W/kg

Maximum value of SAR (measured) = 0.847 W/kg

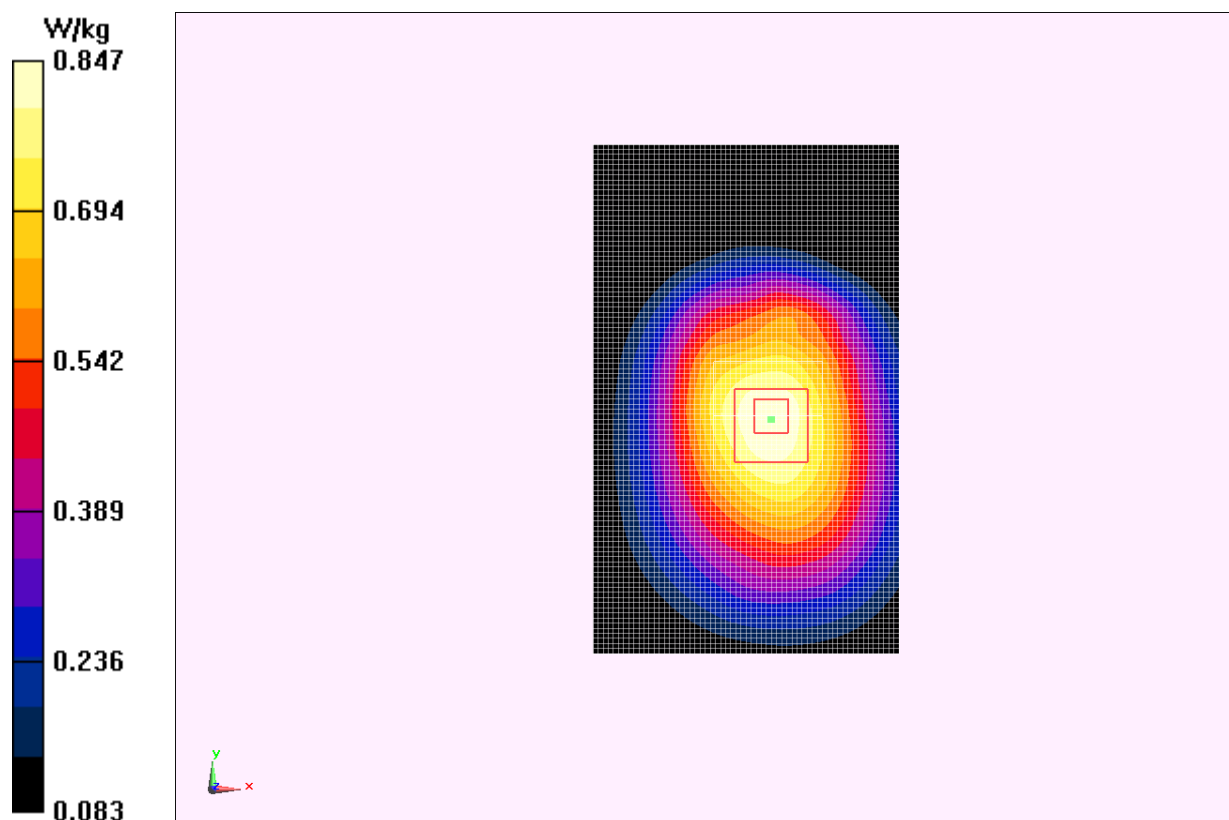


Fig. A.2 850 MHz CH251

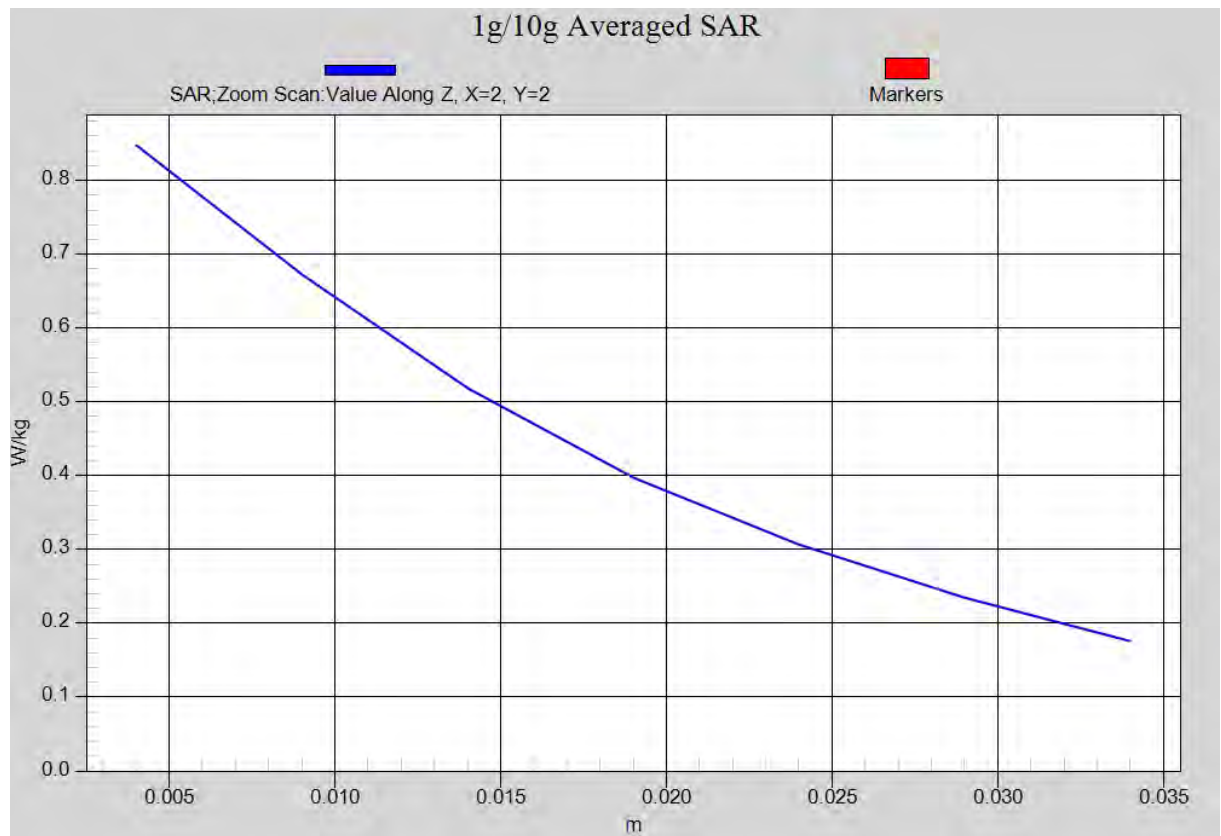


Fig. A.2-1 Z-Scan at power reference point (850 MHz CH251)

1900 Left Cheek Middle

Date: 2013-2-19

Electronics: DAE4 Sn771

Medium: Head GSM1900

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ mho/m; $\epsilon_r = 39.238$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.583 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.196 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.847 mW/g

SAR(1 g) = 0.535 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

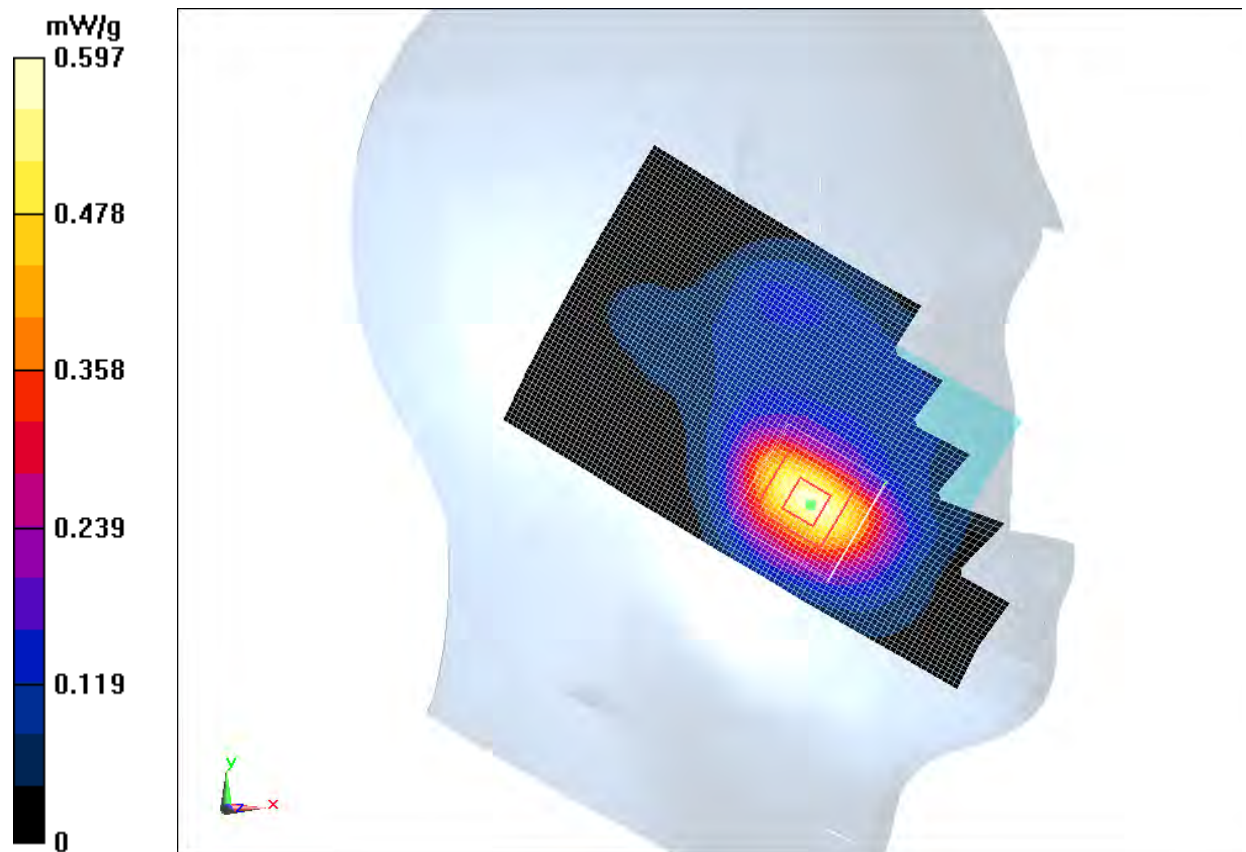


Fig. A.3 1900 MHz CH661

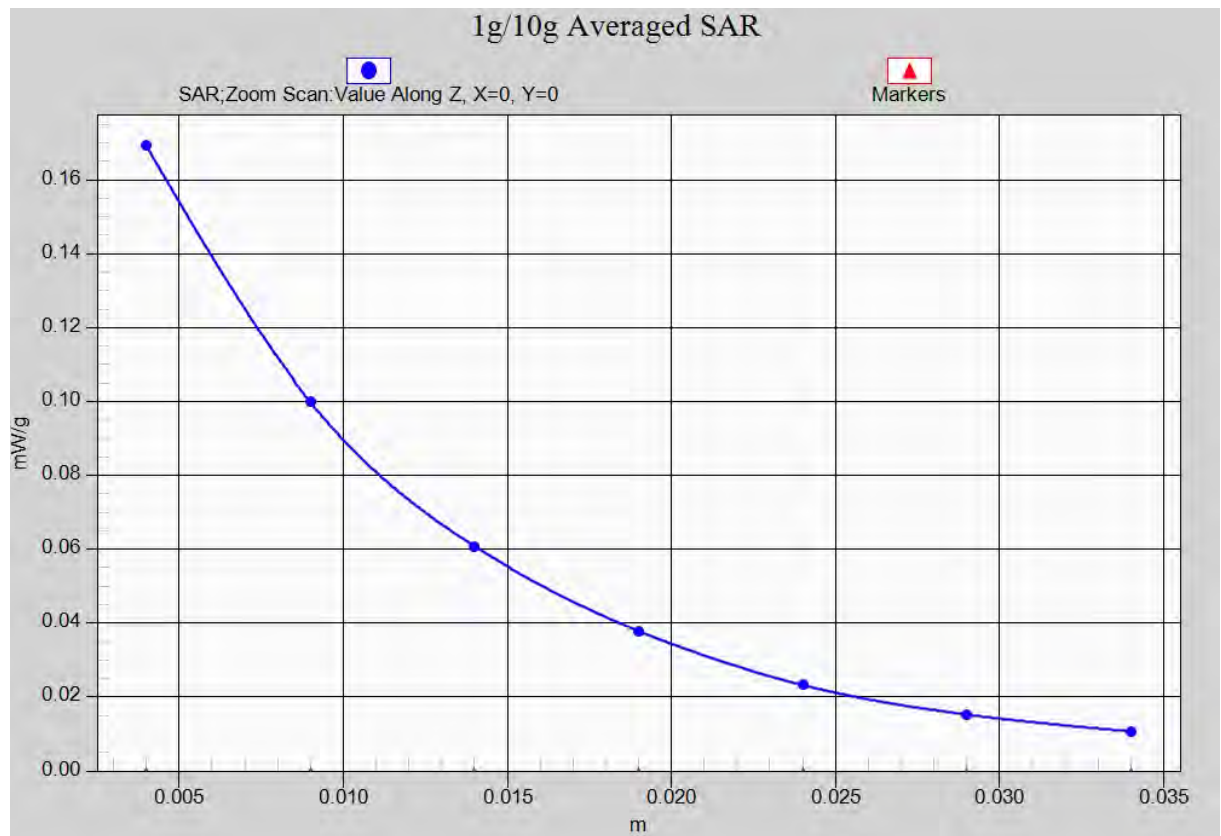


Fig. A.3-1 Z-Scan at power reference point (1900 MHz CH661)

1900 Body Toward Ground High with GPRS

Date: 2013-2-19

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.549$ mho/m; $\epsilon_r = 52.571$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground High/Area Scan (71x111x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.724 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.125 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.999 mW/g

SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.701 mW/g

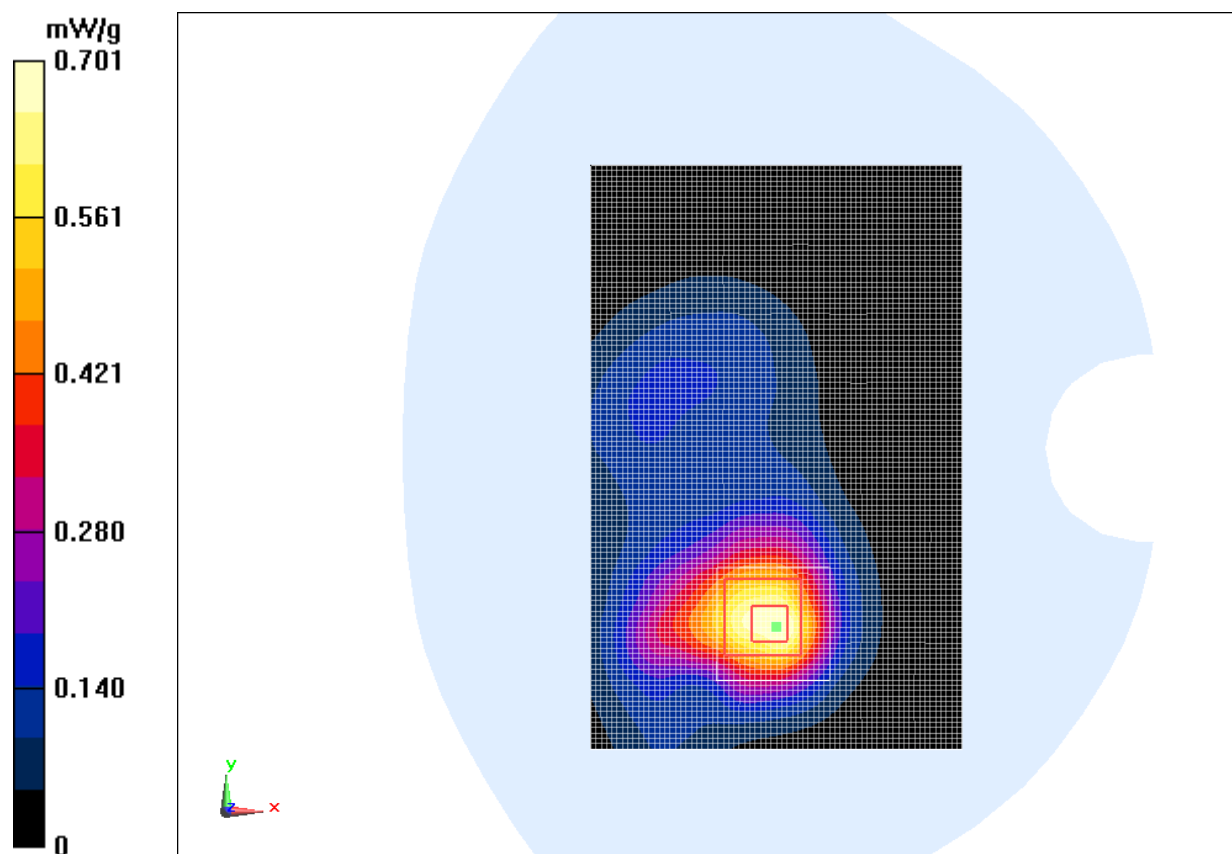


Fig. A.4 1900 MHz CH810

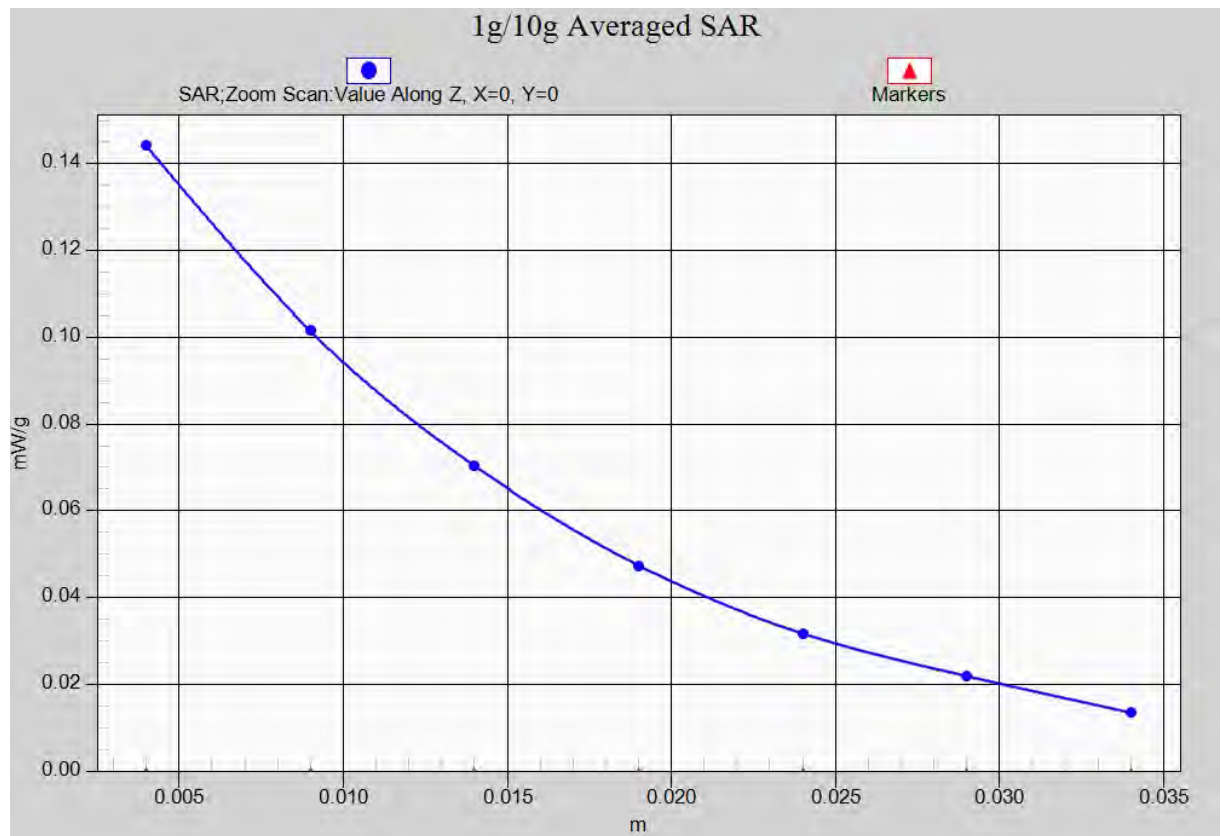


Fig. A.4-1 Z-Scan at power reference point (1900 MHz CH810)

Wifi Right Cheek Middle

Date: 2013-2-17

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.830$ mho/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.0°C

Communication System: Wlan 2450 Frequency: 2437 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

Cheek Middle/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0632 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.592 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.117 mW/g

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0657 mW/g

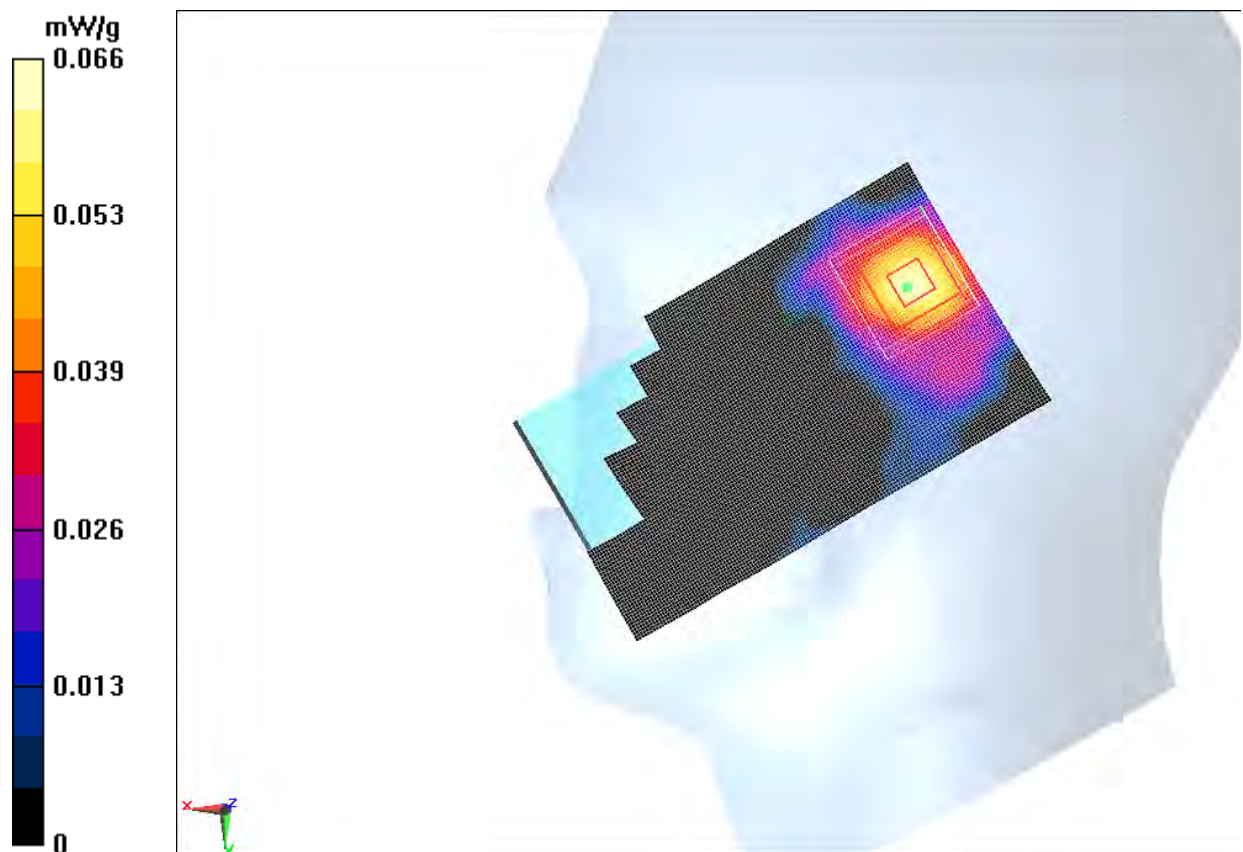


Fig. A.5 2450 MHz CH6

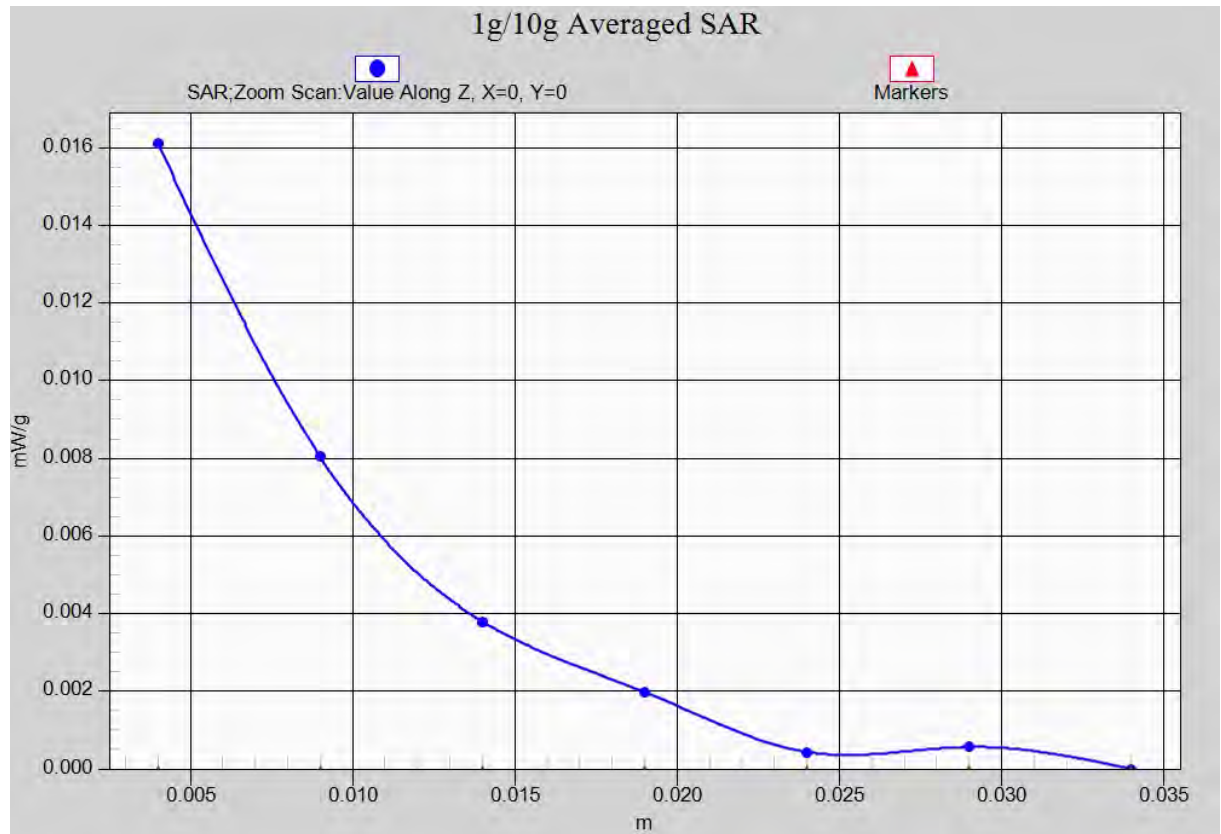


Fig. A.5-1 Z-Scan at power reference point (2450 MHz CH6)

Wifi Body Toward Ground Low

Date: 2013-2-17

Electronics: DAE4 Sn771

Medium: 2450 Body

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.954$ mho/m; $\epsilon_r = 52.307$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.0°C

Communication System: Wlan 2450 Frequency: 2437 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.15, 4.15, 4.15)

Toward Ground Middle/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.321 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.876 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.511 mW/g

SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

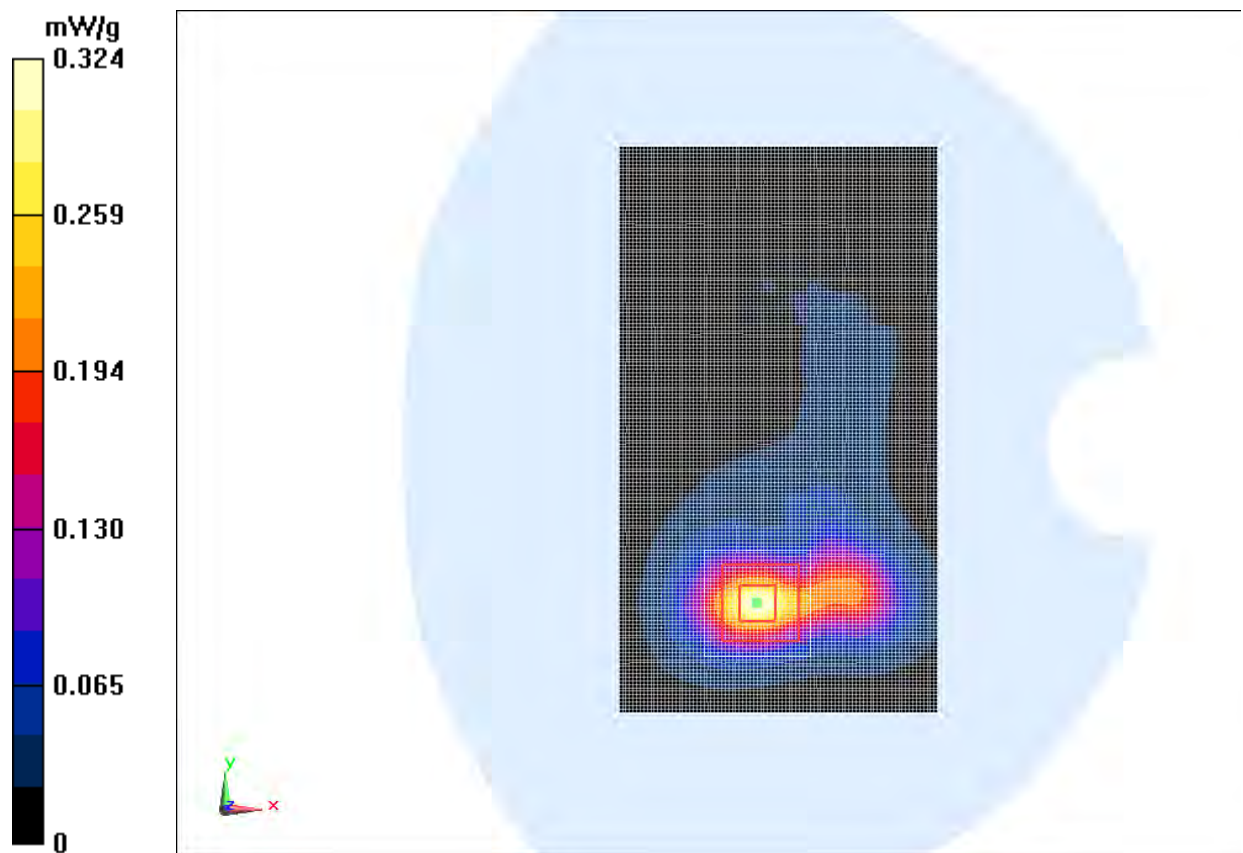


Fig. A.6 2450 MHz CH6

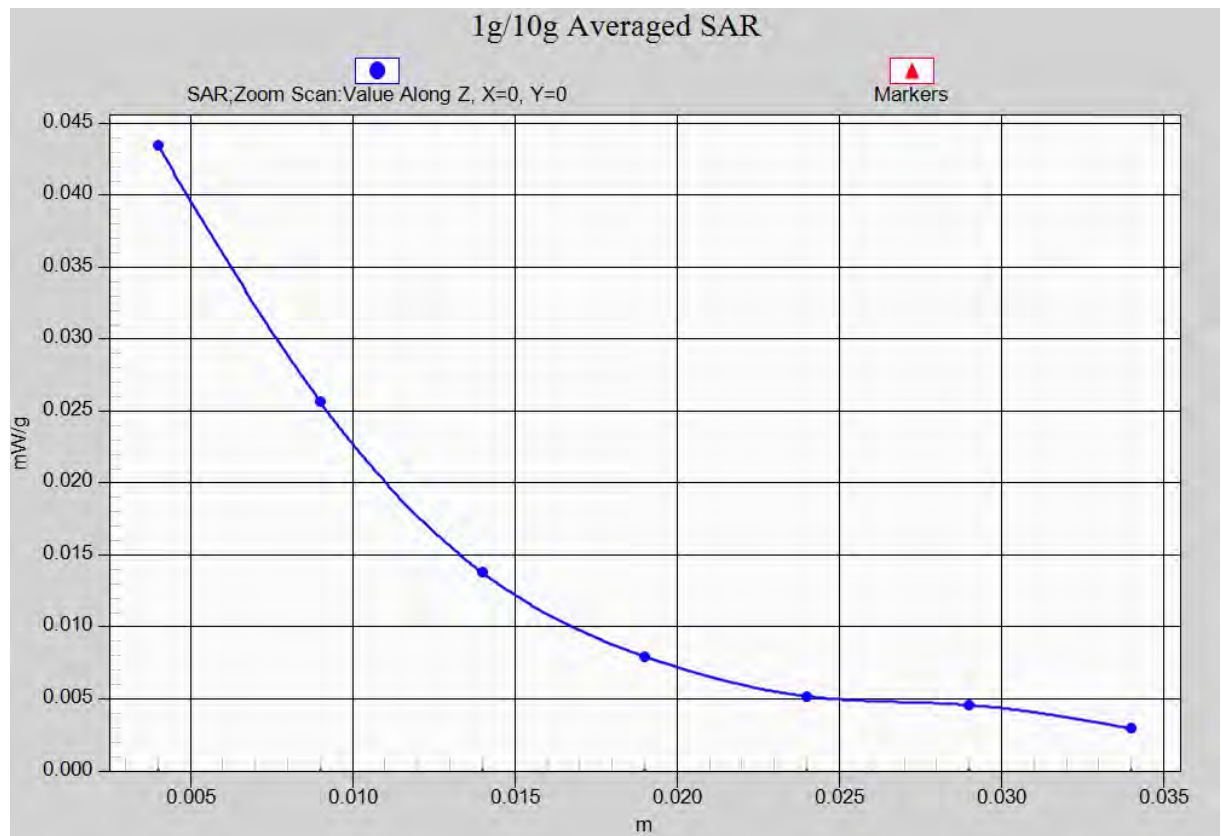


Fig. A.6-1 Z-Scan at power reference point (2450 MHz CH6)

ANNEX B System Verification Results

835MHz

Date: 2013-2-18

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.893$ mho/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.26, 6.26, 6.26)

System Validation /Area Scan (81x161x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 53.008 V/m; Power Drift = -0.081 dB

Fast SAR: SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (interpolated) = 2.58 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.008 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 3.547 W/kg

SAR(1 g) = 2.40 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.59 mW/g

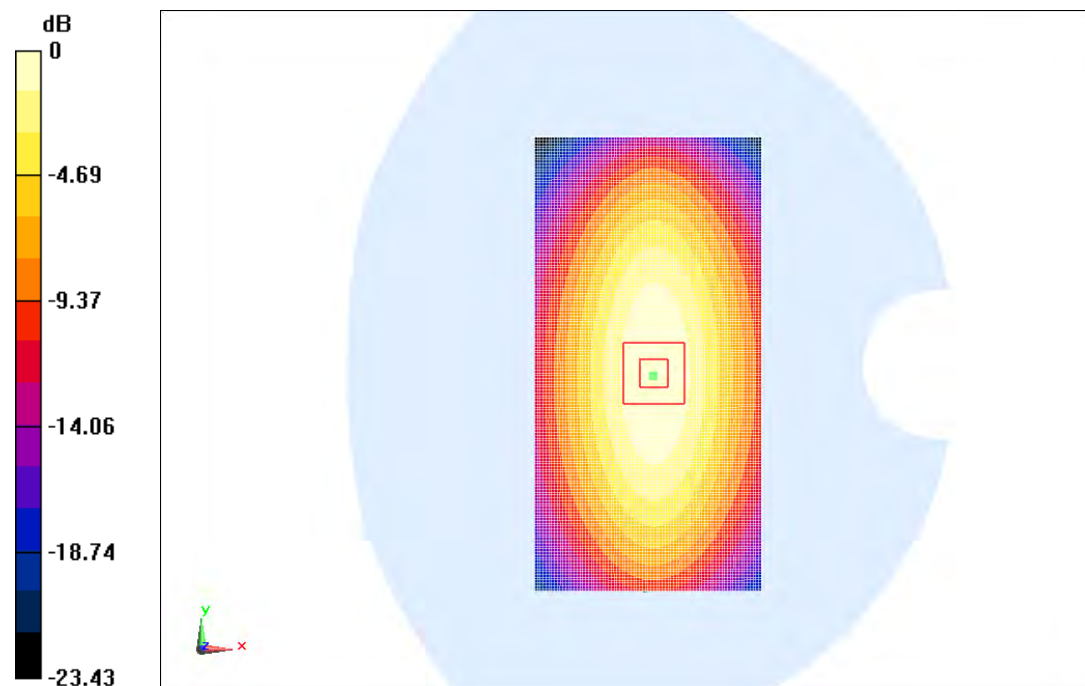

0 dB = 2.59 mW/g = 8.27 dB mW/g

Fig.B.1 validation 835MHz 250mW

835MHz

Date: 2013-2-18

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.29$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

System Validation /Area Scan (81x171x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 46.243 V/m ; Power Drift = 0.063 dB

Fast SAR: SAR(1 g) = 2.37 mW/g ; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (interpolated) = 2.59 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 46.243 V/m ; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 3.582 W/kg

SAR(1 g) = 2.39 mW/g ; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.59 mW/g

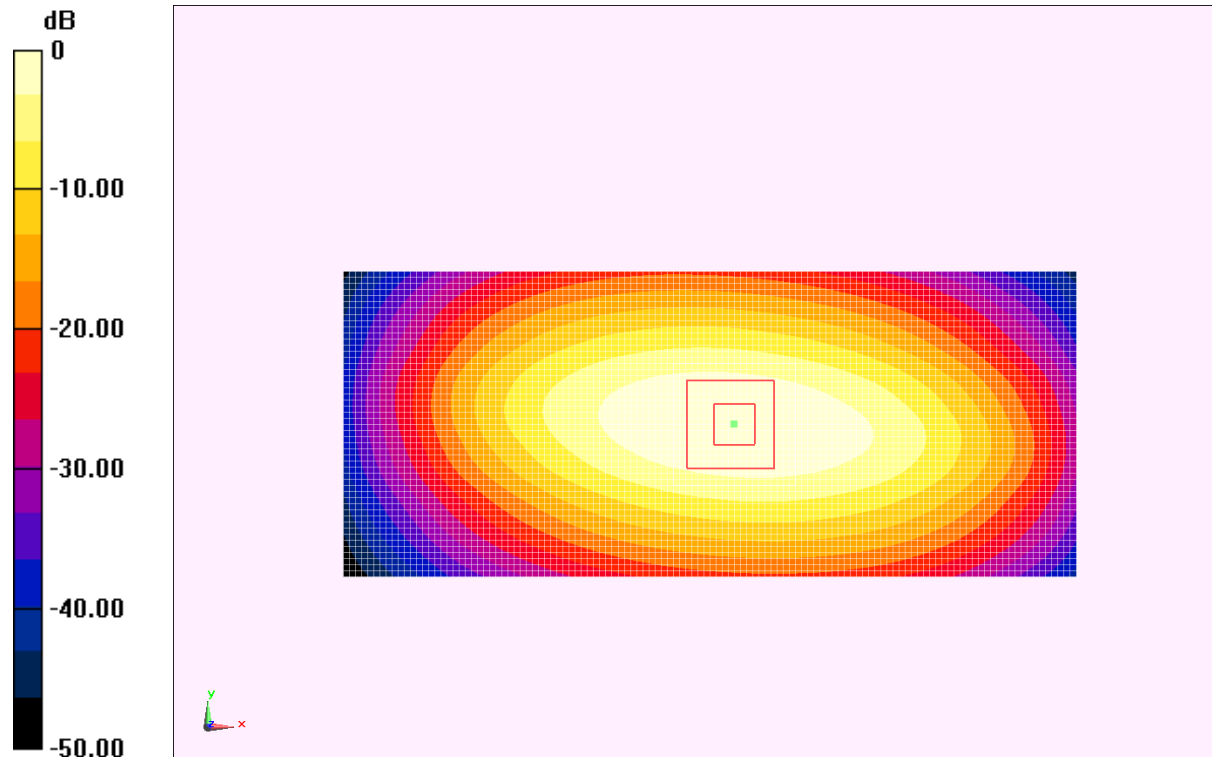

$0 \text{ dB} = 2.59 \text{ mW/g} = 8.27 \text{ dB mW/g}$

Fig.B.2 validation 835MHz 250mW

1900MHz

Date: 2013-2-19

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.418 \text{ mho/m}$; $\epsilon_r = 39.16$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

System Validation/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 94.579 V/m ; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 9.76 mW/g ; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (interpolated) = 11.0 mW/g


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 94.579 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 17.991 W/kg

SAR(1 g) = 9.67 mW/g ; SAR(10 g) = 5.08 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

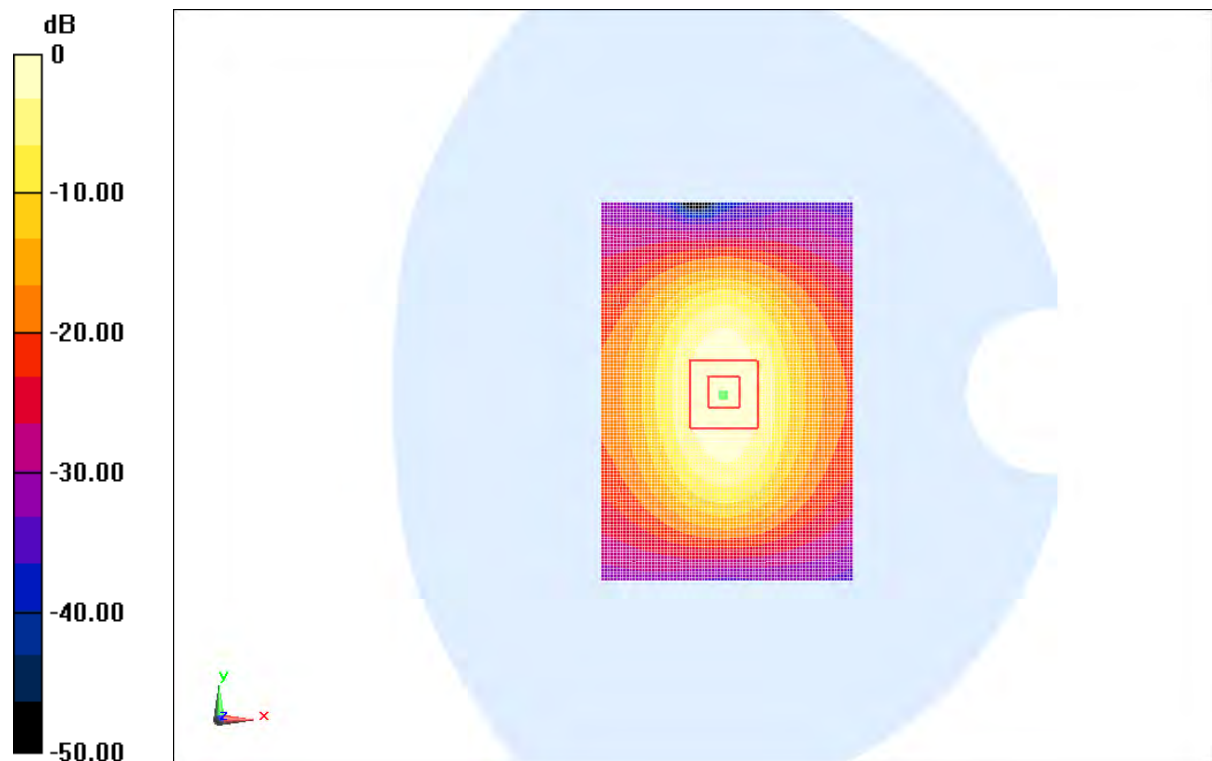

0 dB = 10.9 mW/g = 20.75 dB mW/g

Fig.B.3 validation 1900MHz 250mW

1900MHz

Date: 2013-2-19

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.539$ mho/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

System Validation/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 88.092 V/m; Power Drift = -0.054 dB

Fast SAR: SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (interpolated) = 11.6 mW/g


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.092 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 17.684 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.43 mW/g

Maximum value of SAR (measured) = 11.7 mW/g

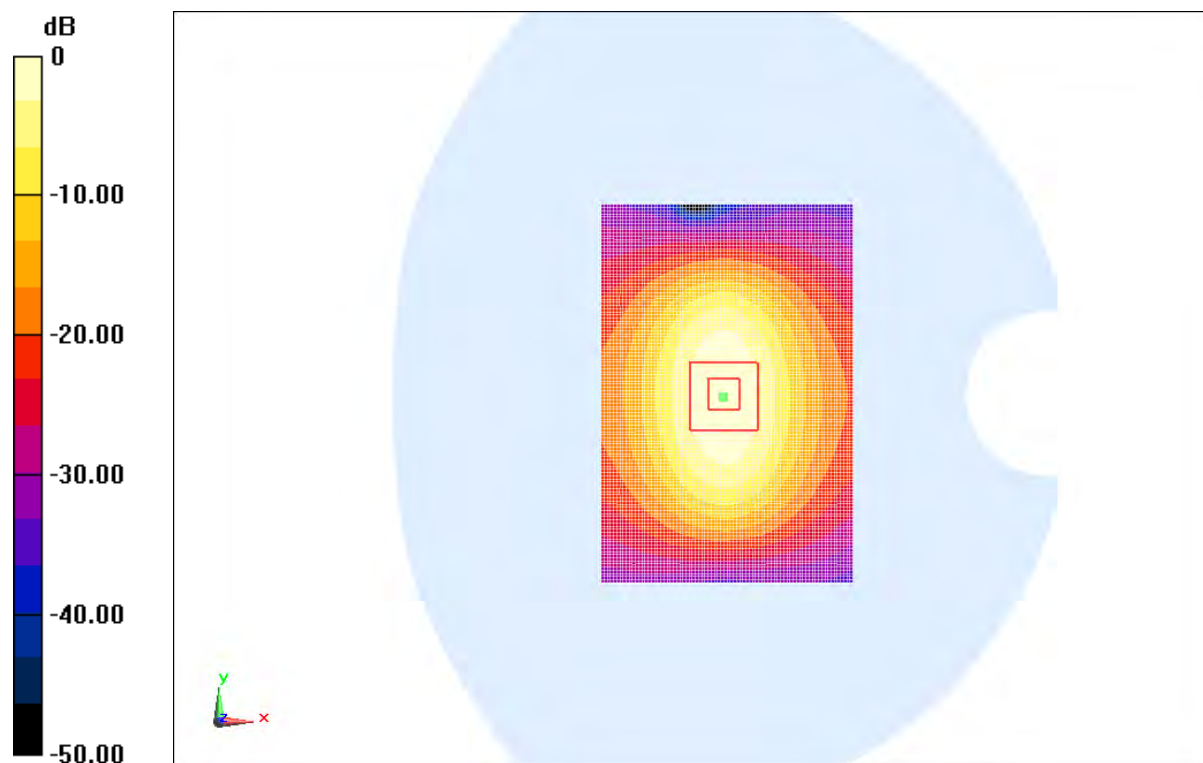

0 dB = 11.7 mW/g = 21.36 dB mW/g

Fig.B.4 validation 1900MHz 250mW

2450MHz

Date: 2013-01-17

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.843$ mho/m; $\epsilon_r = 38.87$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

System Validation /Area Scan (81x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 95.478 V/m; Power Drift = -0.077 dB

Fast SAR: SAR(1 g) = 13.2 mW/g; SAR(10 g) = 6.13 mW/g

Maximum value of SAR (interpolated) = 15.0 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.478 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 28.956 mW/g

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 5.98 mW/g

Maximum value of SAR (measured) = 14.9 mW/g

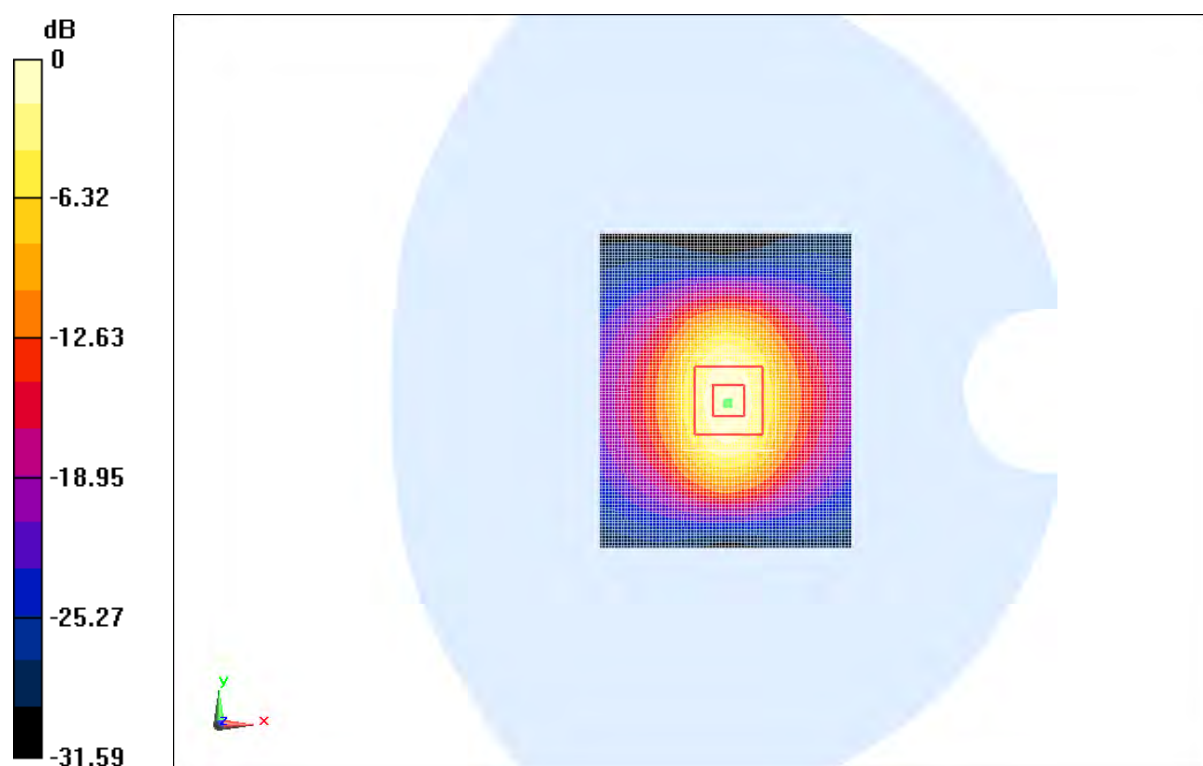

0 dB = 14.9 mW/g = 23.49 dB mW/g

Fig.B.5 validation 2450MHz 250mW

2450MHz

Date: 2013-2-17

Electronics: DAE4 Sn771

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.968$ mho/m; $\epsilon_r = 52.26$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.15, 4.15, 4.15)

System Validation/Area Scan (81x101x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Reference Value = 93.873 V/m; Power Drift = 0.068 dB

Fast SAR: SAR(1 g) = 12.9 mW/g; SAR(10 g) = 6.06 mW/g

Maximum value of SAR (interpolated) = 14.8 mW/g


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 93.873 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 25.971 mW/g

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.95 mW/g

Maximum value of SAR (measured) = 14.7 mW/g

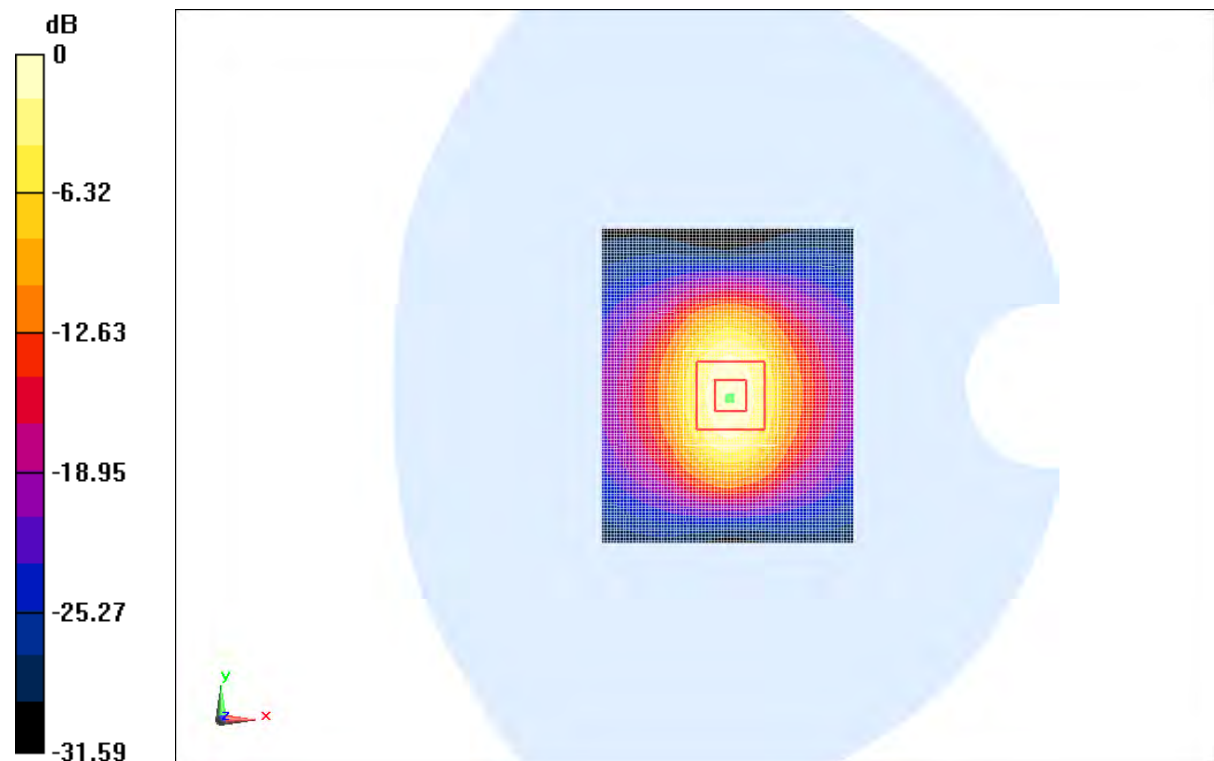

0 dB = 14.7 mW/g = 23.35 dB mW/g

Fig.B.6 validation 2450MHz 250mW

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.


Table B.1 Comparison between area scan and zoom scan for system verification

| Band | Position | Area scan (1g) | Zoom scan (1g) | Drift (%) |
|------|----------|----------------|----------------|-----------|
| 835 | Head | 2.35 | 2.40 | -2.08 |
| 835 | Body | 2.37 | 2.39 | -0.84 |
| 1900 | Head | 9.76 | 9.67 | 0.93 |
| 1900 | Body | 10.1 | 10.2 | -0.98 |
| 2450 | Head | 13.2 | 13.1 | 0.76 |
| 2450 | Body | 12.9 | 12.8 | 0.78 |

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

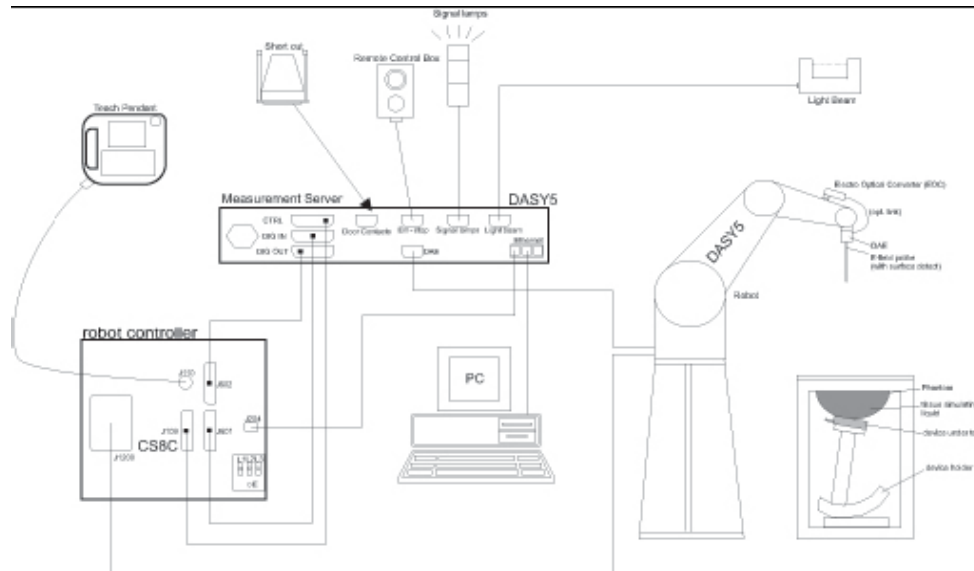

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

| | |
|-----------------------|--|
| Model: | ES3DV3, EX3DV4 |
| Frequency | 10MHz — 6.0GHz(EX3DV4) |
| Range: | 10MHz — 4GHz(ES3DV3) |
| Calibration: | In head and body simulating tissue at Frequencies from 835 up to 5800MHz |
| Linearity: | ± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3 |
| Dynamic Range: | 10 mW/kg — 100W/kg |
| Probe Length: | 330 mm |
| Probe Tip | |
| Length: | 20 mm |
| Body Diameter: | 12 mm |
| Tip Diameter: | 2.5 mm (3.9 mm for ES3DV3) |
| Tip-Center: | 1 mm (2.0mm for ES3DV3) |
| Application: | SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields |



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 4



Picture C.6 DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7 Server for DASY 4



Picture C.8 Server for DASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss

POM material having the following dielectric


parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.9-1: Device Holder

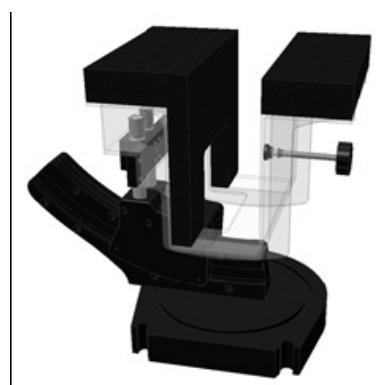

Picture C.9-2: Laptop Extension Kit

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation

of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.10: SAM Twin Phantom

ANNEX D Position of the wireless device in relation to the phantom

D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

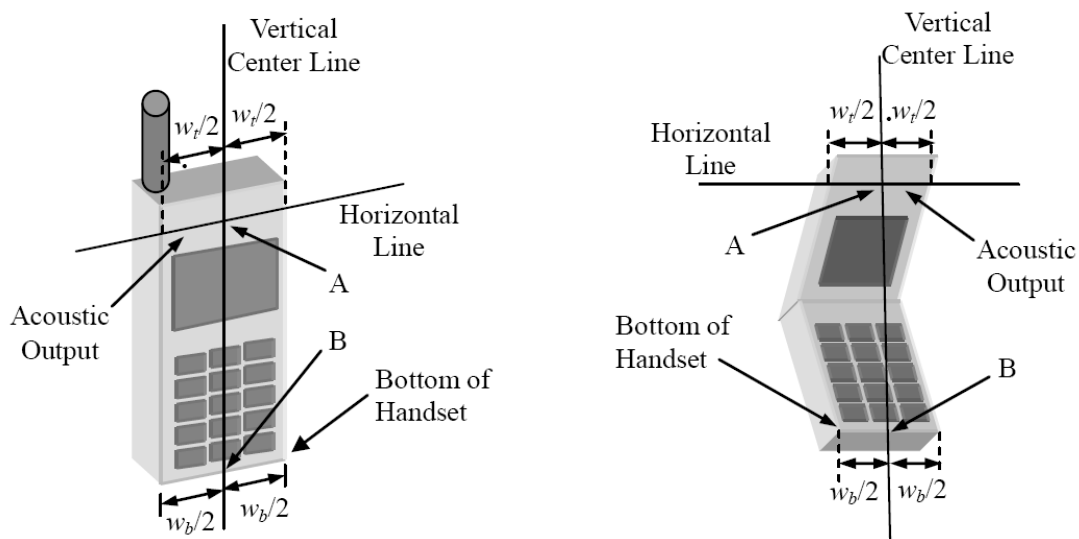


w_t Width of the handset at the level of the acoustic

w_b Width of the bottom of the handset


A Midpoint of the width w_t of the handset at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

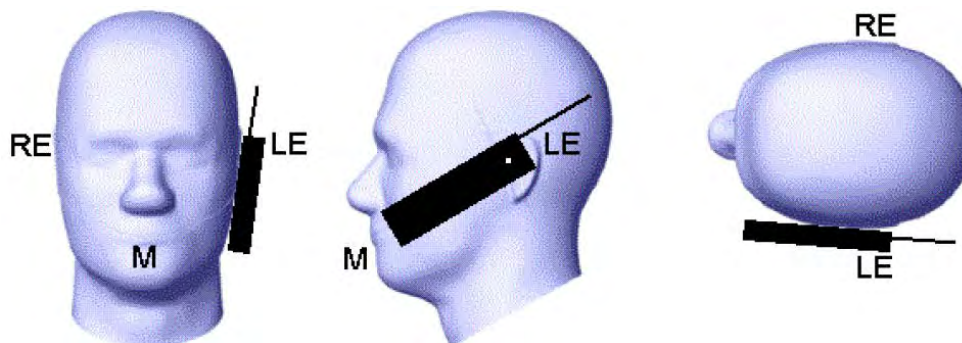


Picture D.2 Cheek position of the wireless device on the left side of SAM

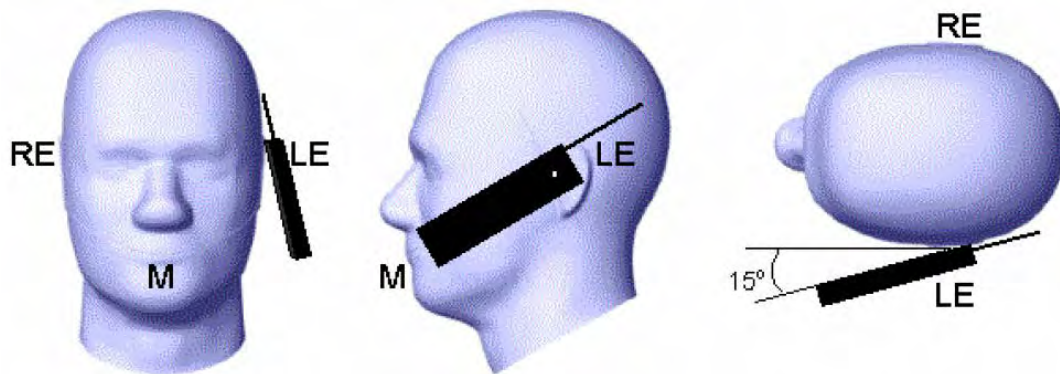

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

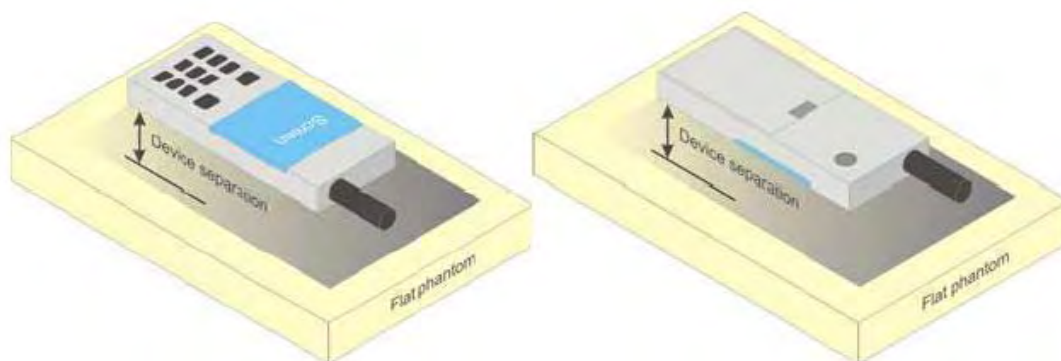


Picture D.4 Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

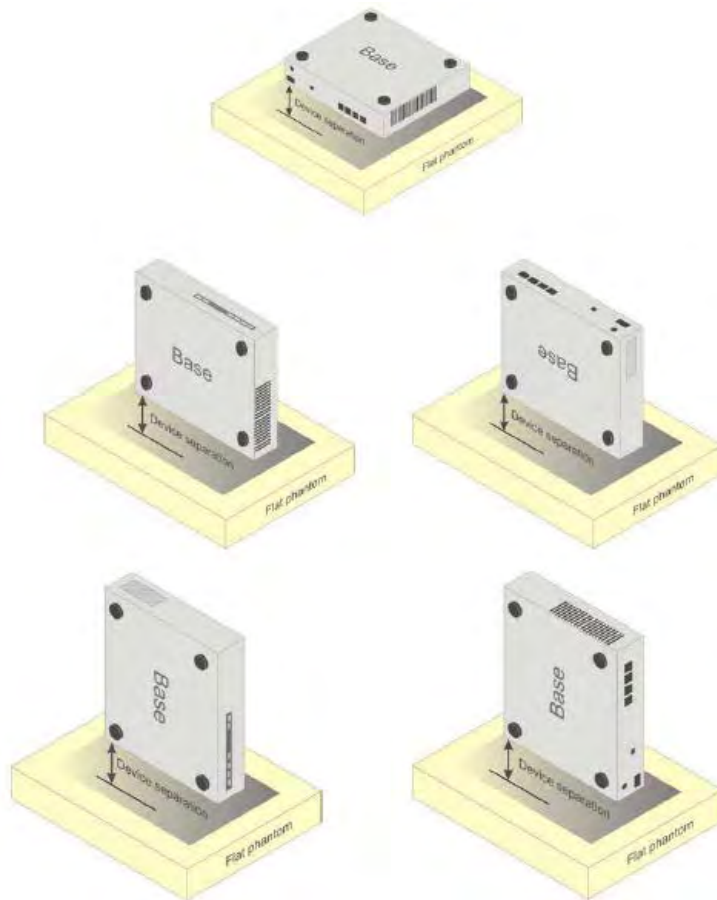

Picture D.5 Test positions for desktop devices

D.4 DUT Setup Photos



Picture D.6

ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 Head | 835 Body | 1900 Head | 1900 Body | 2450 Head | 2450 Body |
|------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Ingredients (% by weight) | | | | | | |
| Water | 41.45 | 52.5 | 55.242 | 69.91 | 58.79 | 72.60 |
| Sugar | 56.0 | 45.0 | \ | \ | \ | \ |
| Salt | 1.45 | 1.4 | 0.306 | 0.13 | 0.06 | 0.18 |
| Preventol | 0.1 | 0.1 | \ | \ | \ | \ |
| Cellulose | 1.0 | 1.0 | \ | \ | \ | \ |
| Glycol Monobutyl | \ | \ | 44.452 | 29.96 | 41.15 | 27.22 |
| Dielectric Parameters Target Value | $\epsilon=41.5$ $\sigma=0.90$ | $\epsilon=55.2$ $\sigma=0.97$ | $\epsilon=40.0$ $\sigma=1.40$ | $\epsilon=53.3$ $\sigma=1.52$ | $\epsilon=39.2$ $\sigma=1.80$ | $\epsilon=52.7$ $\sigma=1.95$ |

ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation

| Probe SN. | Liquid name | Validation date | Frequency point | Status (OK or Not) |
|-----------|--------------|-----------------|-----------------|--------------------|
| 3149 | Head 750MHz | Sep. 17, 2012 | 750 MHz | OK |
| 3149 | Head 850MHz | Sep. 17, 2012 | 850 MHz | OK |
| 3149 | Head 900MHz | Sep. 17, 2012 | 900 MHz | OK |
| 3149 | Head 1800MHz | Sep. 18, 2012 | 1800 MHz | OK |
| 3149 | Head 1900MHz | Sep. 18, 2012 | 1900 MHz | OK |
| 3149 | Head 2000MHz | Sep. 18, 2012 | 2000 MHz | OK |
| 3149 | Head 2100MHz | Sep. 18, 2012 | 2100 MHz | OK |
| 3149 | Head 2450MHz | Sep. 19, 2012 | 2450 MHz | OK |
| 3149 | Head 2550MHz | Sep. 19, 2012 | 2550 MHz | OK |
| 3149 | Head 2600MHz | Sep. 19, 2012 | 2600 MHz | OK |
| 3149 | Body 750MHz | Sep. 20, 2012 | 750 MHz | OK |
| 3149 | Body 850MHz | Sep. 20, 2012 | 850 MHz | OK |
| 3149 | Body 900MHz | Sep. 20, 2012 | 900 MHz | OK |
| 3149 | Body 1800MHz | Sep. 21, 2012 | 1800 MHz | OK |
| 3149 | Body 1900MHz | Sep. 21, 2012 | 1900 MHz | OK |
| 3149 | Body 2000MHz | Sep. 21, 2012 | 2000 MHz | OK |
| 3149 | Body 2100MHz | Sep. 21, 2012 | 2100 MHz | OK |
| 3149 | Body 2450MHz | Sep. 22, 2012 | 2450 MHz | OK |
| 3149 | Body 2550MHz | Sep. 22, 2012 | 2550 MHz | OK |
| 3149 | Body 2600MHz | Sep. 22, 2012 | 2600 MHz | OK |

ANNEX G Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC Beijing**

Certificate No: **ES3-3149_Apr12**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3149**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**



Calibration date: **April 24, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 29-Mar-12 (No. 217-01508) | Apr-13 |
| Power sensor E4412A | MY41498087 | 29-Mar-12 (No. 217-01508) | Apr-13 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 27-Mar-12 (No. 217-01531) | Apr-13 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 27-Mar-12 (No. 217-01529) | Apr-13 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 27-Mar-12 (No. 217-01532) | Apr-13 |
| Reference Probe ES3DV2 | SN: 3013 | 29-Dec-11 (No. ES3-3013_Dec11) | Dec-12 |
| DAE4 | SN: 660 | 10-Jan-12 (No. DAE4-660_Jan12) | Jan-13 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-11) | In house check: Apr-13 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |
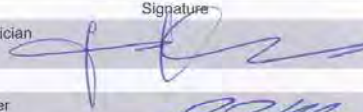
| | | | |
|----------------|-------------------------------|-----------------------------------|--|
| Calibrated by: | Name Jeton Kastrati | Function Laboratory Technician | Signature  |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature  |

Issued: April 24, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 – SN:3149

April 24, 2012

Probe ES3DV3

SN:3149

Manufactured: June 12, 2007
Calibrated: April 24, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV3- SN:3149

April 24, 2012

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3149

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.21 | 1.24 | 1.24 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 101.1 | 100.9 | 100.5 | |

Modulation Calibration Parameters

| UID | Communication System Name | PAR | | A dB | B dB | C dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|------|---|---------|---------|---------|----------|---------------------------|
| 0 | CW | 0.00 | X | 0.00 | 0.00 | 1.00 | 112.7 | $\pm 2.2 \%$ |
| | | | Y | 0.00 | 0.00 | 1.00 | 114.2 | |
| | | | Z | 0.00 | 0.00 | 1.00 | 118.9 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV3- SN:3149

April 24, 2012

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3149

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750 | 41.9 | 0.89 | 6.50 | 6.50 | 6.50 | 0.24 | 2.36 | ± 12.0 % |
| 850 | 41.5 | 0.92 | 6.26 | 6.26 | 6.26 | 0.25 | 2.14 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 6.17 | 6.17 | 6.17 | 0.21 | 2.55 | ± 12.0 % |
| 1800 | 40.0 | 1.40 | 5.23 | 5.23 | 5.23 | 0.43 | 1.64 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.19 | 5.19 | 5.19 | 0.45 | 1.64 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 5.11 | 5.11 | 5.11 | 0.52 | 1.46 | ± 12.0 % |
| 2100 | 39.8 | 1.49 | 5.12 | 5.12 | 5.12 | 0.49 | 1.52 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.49 | 4.49 | 4.49 | 0.71 | 1.37 | ± 12.0 % |
| 2550 | 39.1 | 1.91 | 4.34 | 4.34 | 4.34 | 0.69 | 1.26 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.26 | 4.26 | 4.26 | 0.55 | 1.29 | ± 12.0 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV3– SN:3149

April 24, 2012

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3149

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750 | 55.5 | 0.96 | 6.29 | 6.29 | 6.29 | 0.43 | 1.56 | ± 12.0 % |
| 850 | 55.2 | 0.99 | 6.14 | 6.14 | 6.14 | 0.41 | 1.63 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 6.16 | 6.16 | 6.16 | 0.63 | 1.30 | ± 12.0 % |
| 1800 | 53.3 | 1.52 | 4.84 | 4.84 | 4.84 | 0.28 | 2.97 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.64 | 4.64 | 4.64 | 0.34 | 2.25 | ± 12.0 % |
| 2000 | 53.3 | 1.52 | 4.63 | 4.63 | 4.63 | 0.35 | 2.21 | ± 12.0 % |
| 2100 | 53.2 | 1.62 | 4.91 | 4.91 | 4.91 | 0.36 | 2.20 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.15 | 4.15 | 4.15 | 0.80 | 0.61 | ± 12.0 % |
| 2550 | 52.6 | 2.09 | 4.07 | 4.07 | 4.07 | 0.80 | 0.50 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 3.99 | 3.99 | 3.99 | 0.80 | 0.51 | ± 12.0 % |


^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV3—SN:3149

April 24, 2012

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

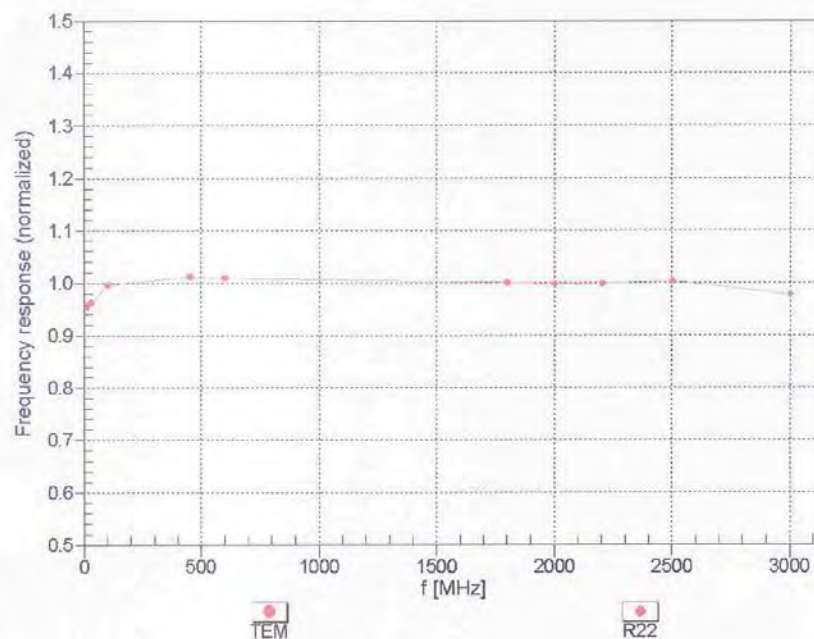


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3- SN:3149



April 24, 2012

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

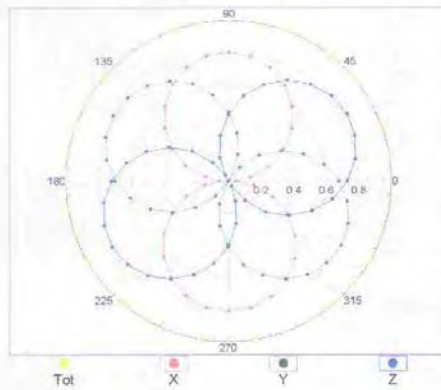

f=1800 MHz,R22

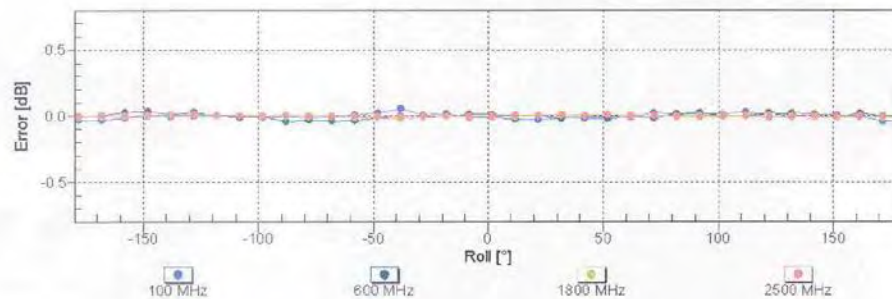
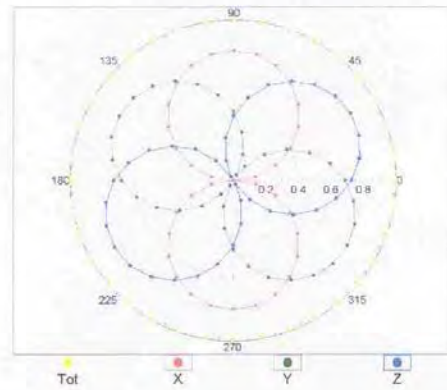


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3- SN:3149

April 24, 2012

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

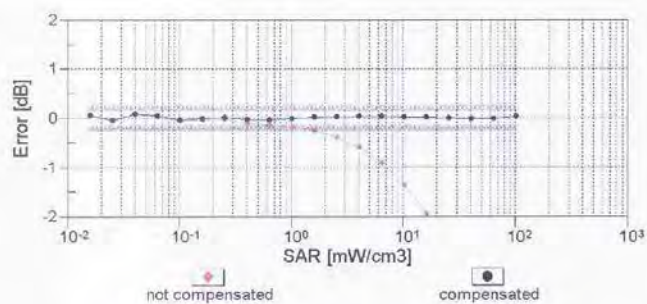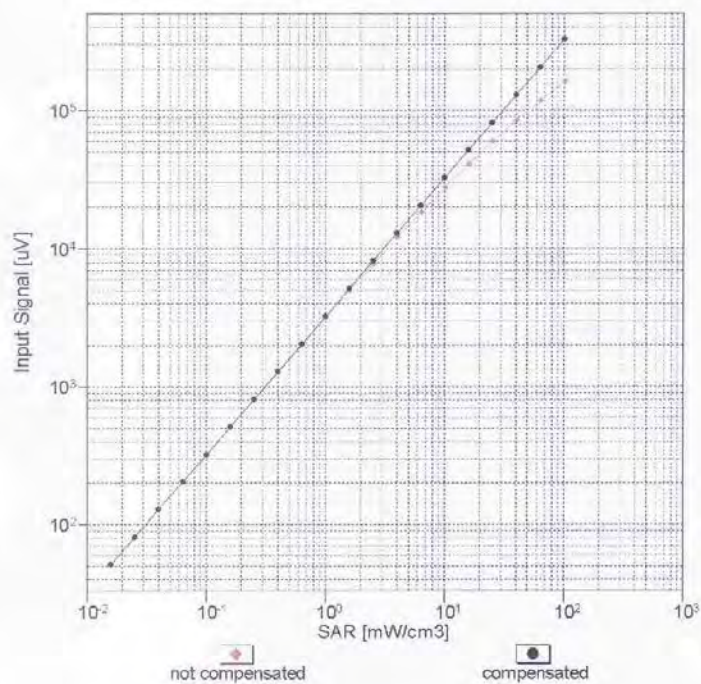


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


ES3DV3- SN:3149

April 24, 2012

Conversion Factor Assessment

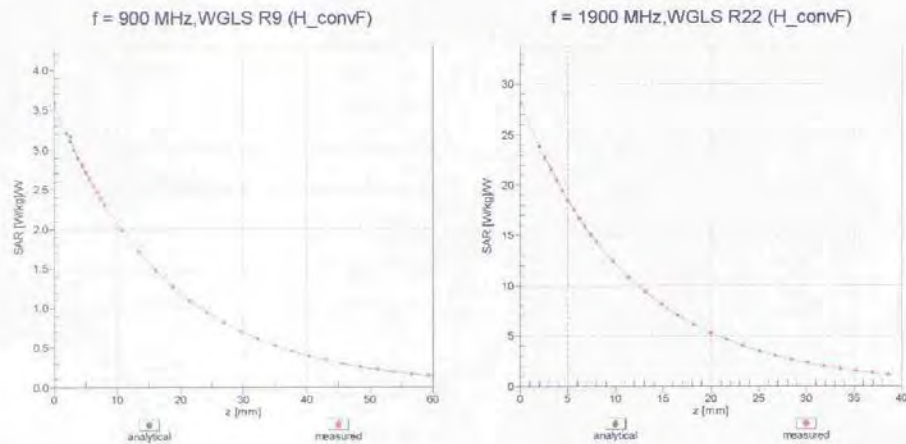

Deviation from Isotropy in Liquid Error (ϕ , θ), $f = 900 \text{ MHz}$

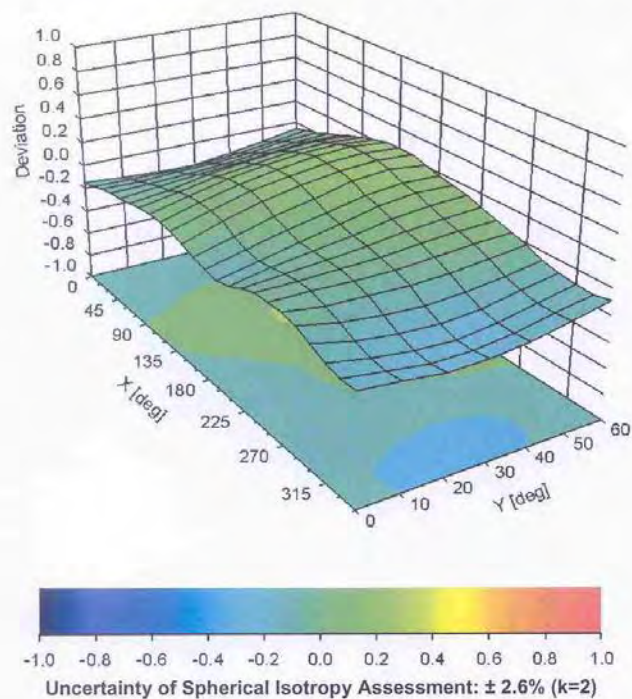

ES3DV3- SN:3149

April 24, 2012

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3149

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 51.8 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

ANNEX H Dipole Calibration Certificate

835 MHz Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC Beijing**

Certificate No: **D835V2-443_May12**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 443**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 03, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Power sensor HP 8481A | US37292783 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 27-Mar-12 (No. 217-01530) | Apr-13 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 27-Mar-12 (No. 217-01533) | Apr-13 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-11 (No. ES3-3205_Dec11) | Dec-12 |
| DAE4 | SN: 601 | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

| | | | |
|----------------|----------------|-----------------------|---|
| | Name | Function | Signature |
| Calibrated by: | Jeton Kastrati | Laboratory Technician |  |
| Approved by: | Katja Pokovic | Technical Manager |  |

Issued: May 3, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.1 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.1 \pm 6 % | 0.90 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 2.33 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.30 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
| SAR measured | 250 mW input power | 1.52 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.07 mW / g \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.5 \pm 6 % | 1.01 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 2.42 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.36 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
| SAR measured | 250 mW input power | 1.59 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.20 mW / g \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.8 \Omega - 6.7 j\Omega$ |
| Return Loss | - 23.5 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $46.8 \Omega - 7.8 j\Omega$ |
| Return Loss | - 21.2 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.387 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 26, 2001 |

DASY5 Validation Report for Head TSL

Date: 03.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 443

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=250 mW, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.826 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.423 mW/g


SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.52 mW/g

Maximum value of SAR (measured) = 2.71 mW/g

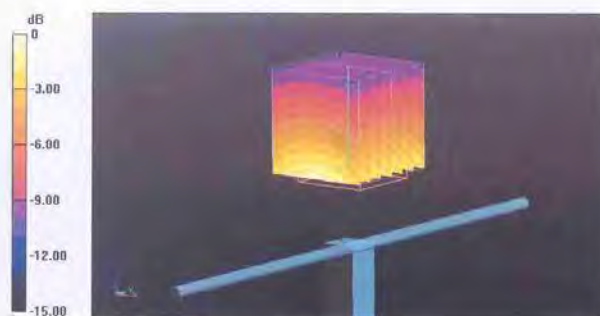

0 dB = 2.71 mW/g = 8.66 dB mW/g

Impedance Measurement Plot for Head TSL

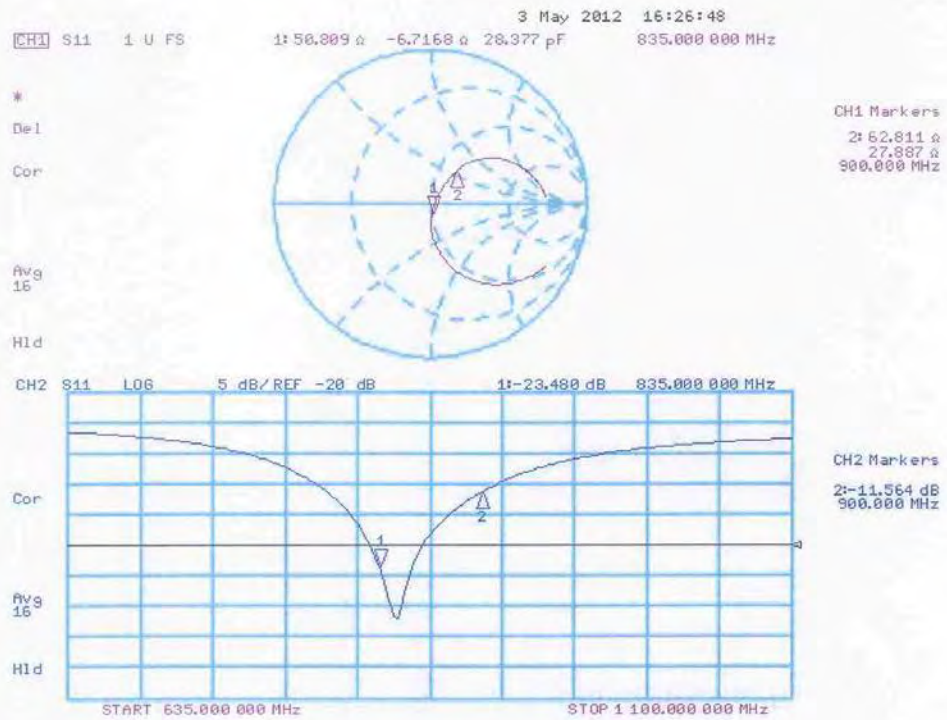

DASY5 Validation Report for Body TSL

Date: 03.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 443

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.758 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.514 mW/g


SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.82 mW/g

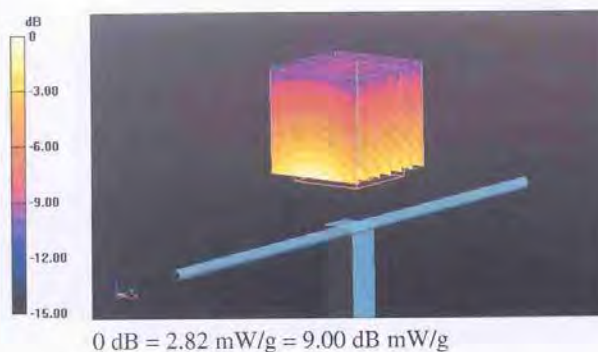

0 dB = 2.82 mW/g = 9.00 dB mW/g

Impedance Measurement Plot for Body TSL

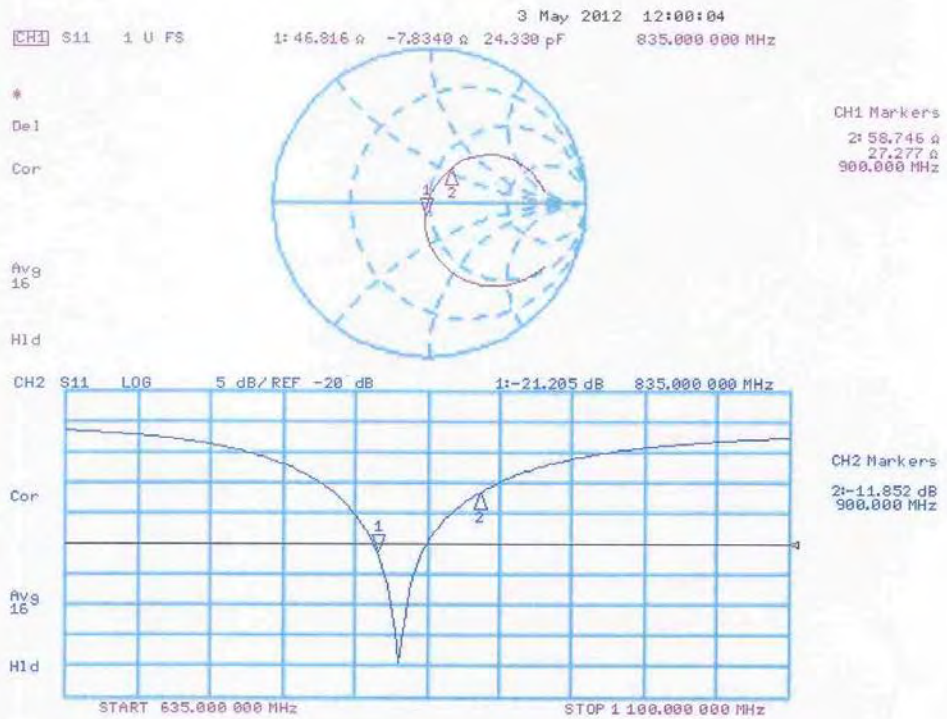

1900 MHz Dipole Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC Beijing**

Certificate No: **D1900V2-541_May12**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 541**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz



Calibration date: **May 09, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Power sensor HP 8481A | US37292783 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 27-Mar-12 (No. 217-01530) | Apr-13 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 27-Mar-12 (No. 217-01533) | Apr-13 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-11 (No. ES3-3205_Dec11) | Dec-12 |
| DAE4 | SN: 601 | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

| | | | |
|----------------|----------------|-----------------------|---|
| | Name | Function | Signature |
| Calibrated by: | Israa El-Naouq | Laboratory Technician |  |
| Approved by: | Katja Pokovic | Technical Manager |  |

Issued: May 9, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.1 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 40.5 \pm 6 % | 1.37 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 9.62 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 39.1 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
| SAR measured | 250 mW input power | 5.11 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 20.6 mW / g \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 52.9 \pm 6 % | 1.52 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 10.0 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 39.9 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
| SAR measured | 250 mW input power | 5.33 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 21.3 mW / g \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.6 \Omega + 6.2 j\Omega$ |
| Return Loss | - 23.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.6 \Omega + 6.9 j\Omega$ |
| Return Loss | - 23.0 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.197 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 26, 2001 |

DASY5 Validation Report for Head TSL

Date: 09.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 541

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.763 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 17.071 mW/g

SAR(1 g) = 9.62 mW/g; SAR(10 g) = 5.11 mW/g

Maximum value of SAR (measured) = 12.0 mW/g

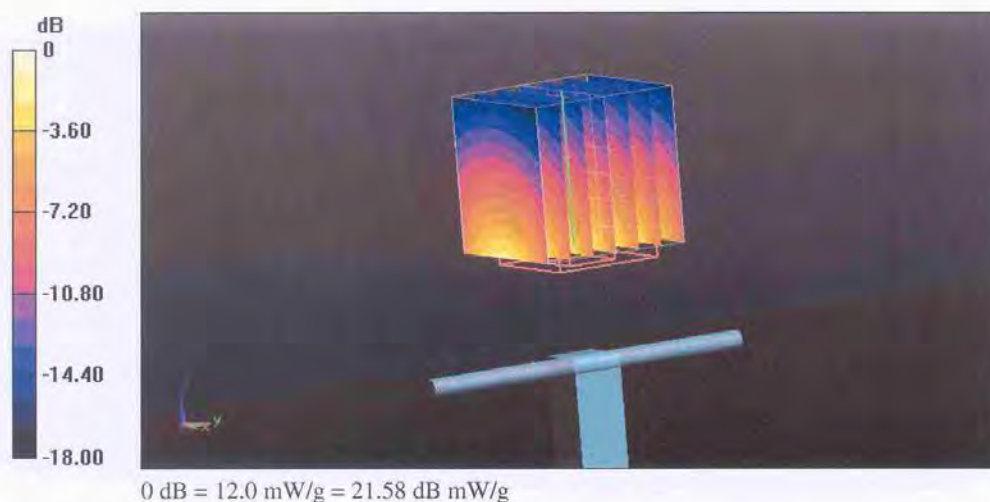

Impedance Measurement Plot for Head TSL

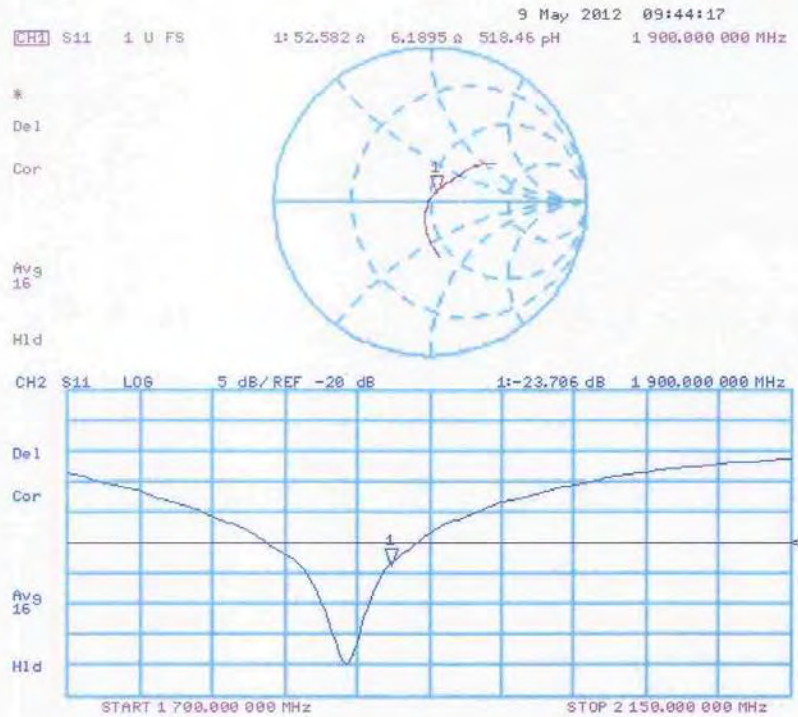

DASY5 Validation Report for Body TSL

Date: 04.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 541

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 95.165 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.442 mW/g


SAR(1 g) = 10 mW/g; SAR(10 g) = 5.33 mW/g

Maximum value of SAR (measured) = 12.7 mW/g

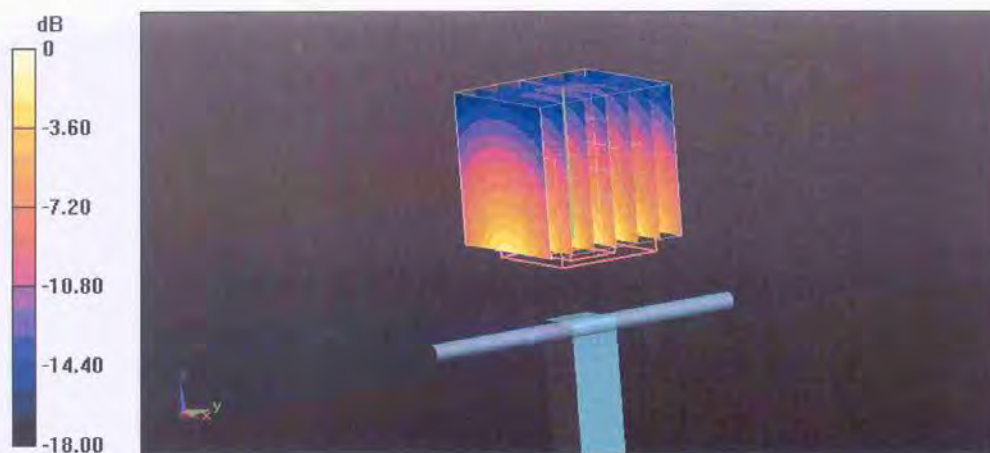

0 dB = 12.7 mW/g = 22.08 dB mW/g

Impedance Measurement Plot for Body TSL

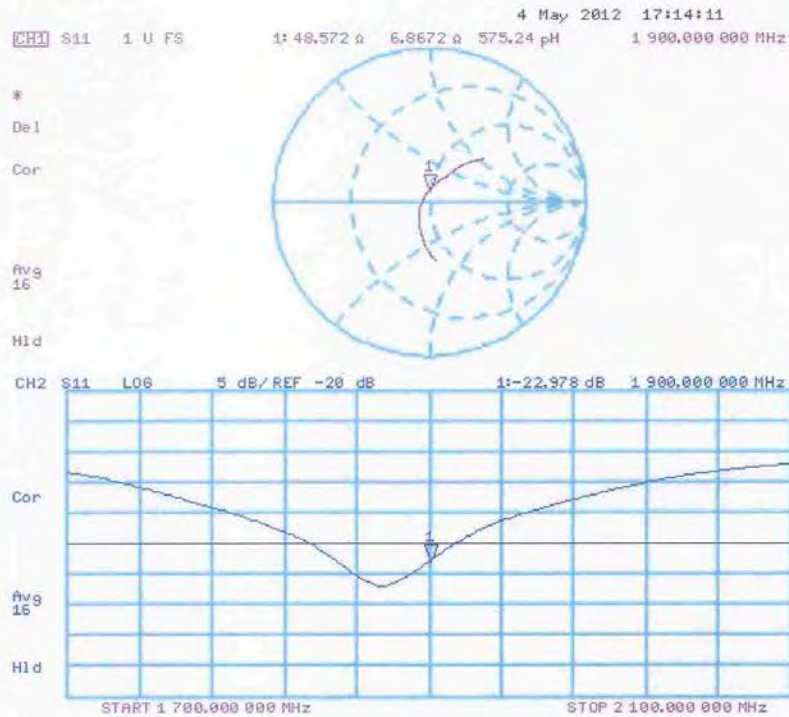

2450 MHz Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC Beijing**

Certificate No: **D2450V2-853_May12**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 853**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 02, 2012**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|--------------------------------|-----------------------|
| Power meter EPM-442A | GB37480704 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Power sensor HP 8481A | US37292783 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 27-Mar-12 (No. 217-01530) | Apr-13 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 27-Mar-12 (No. 217-01533) | Apr-13 |
| Reference Probe ES3DV3 | SN: 3205 | 30-Dec-11 (No. ES3-3205_Dec11) | Dec-12 |
| DAE4 | SN: 601 | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|------------------|-----------------------------------|------------------------|
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | in house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | in house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | in house check: Oct-12 |

| | | | |
|----------------|----------------|-----------------------|---|
| | Name | Function | Signature |
| Calibrated by: | Israe El-Naouq | Laboratory Technician |  |
| Approved by: | Katja Pokovic | Technical Manager |  |

Issued: May 2, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.1 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.6 \pm 6 % | 1.81 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 13.1 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 52.4 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
| SAR measured | 250 mW input power | 6.09 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.4 mW / g \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 52.4 \pm 6 % | 1.98 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 12.7 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 50.4 mW / g \pm 17.0 % (k=2) |

| | | |
|---|--------------------|--------------------------------|
| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
| SAR measured | 250 mW input power | 5.92 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 23.6 mW / g \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.7 \Omega + 3.2 j\Omega$ |
| Return Loss | - 26.4 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $49.9 \Omega + 4.8 j\Omega$ |
| Return Loss | - 26.4 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.163 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------------------|
| Manufactured by | SPEAG |
| Manufactured on | November 10, 2009 |

DASY5 Validation Report for Head TSL

Date: 02.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 853

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.81 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 26.785 mW/g

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.09 mW/g

Maximum value of SAR (measured) = 16.7 mW/g

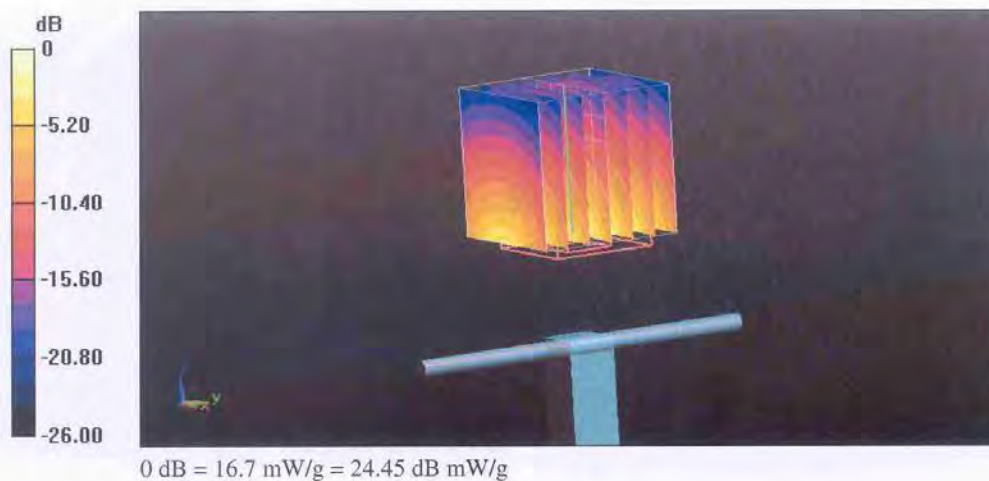

Impedance Measurement Plot for Head TSL

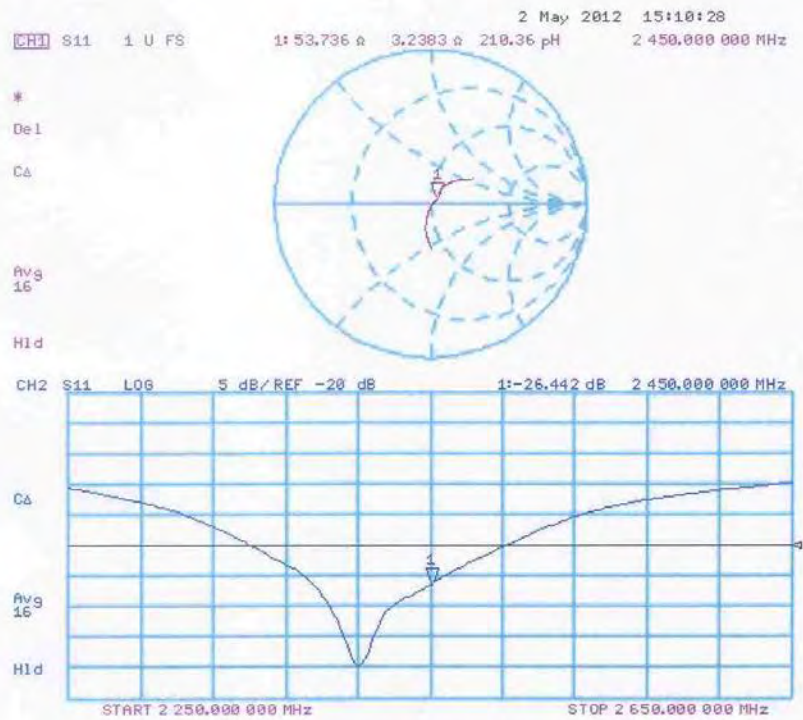

DASY5 Validation Report for Body TSL

Date: 02.05.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 853

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.26, 4.26, 4.26); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.306 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 26.029 mW/g

SAR(1 g) = 12.7 mW/g; SAR(10 g) = 5.92 mW/g

Maximum value of SAR (measured) = 16.8 mW/g

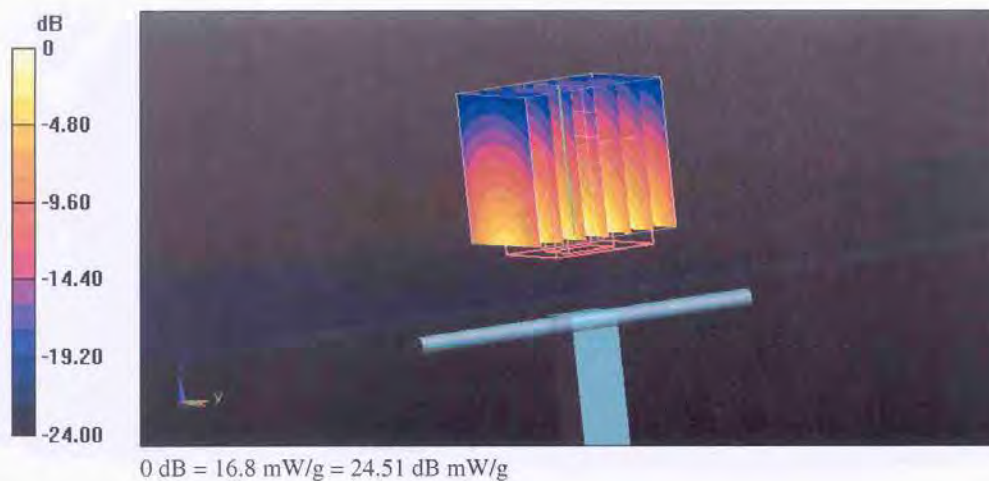

Impedance Measurement Plot for Body TSL

