



TEST REPORT

No. 2013TAR571

for

TCT Mobile Limited

HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone

Model Name: California 2SIM US

Marketing Name: ONE TOUCH 6012E

FCC ID: RAD391

with

Hardware Version: Proto2

Software Version: 3A0B

Issued Date: Aug. 02nd, 2013

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

Location D

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No.18A, Kangding Street, Beijing Economic-Technological
Development Area, Beijing, China
Postal Code: 100176

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Jul. 19th, 2012
Testing End Date: Jul. 22nd, 2013

1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 12F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District, Shenzhen,
Guangdong, P.R. China. 518057
City: Guang dong
Postal Code: 518057
Country: China
Contact Person: Lv Meixian
Contact Email: meixian.lv@tcl.com
Telephone: 0086 -755-33956929
Fax: 0086 -755-36645072

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 12F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District, Shenzhen,
Guangdong, P.R. China. 518057
City: Guang dong
Postal Code: 518057
Country: China
Telephone: 0086 -755-33956929
Fax: 0086 -755-36645072

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUP	A/HSDPA/UMTS triband/GSM quadband mobile phone
Model Name	California 2SIM US	
Marketing Name	ONE TOUCH 6012E	
FCC ID	RAD391	
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)	

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1 0137	69000100078	Proto2	3A0B

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Battery	/
AE3	T ravel charger	/
AE4	T ravel charger	/
AE5	USB cable	/
AE6	USB cable	/
AE7	USB cable	/
AE8	USB cable	/

AE1

Model	CAC170	0001C1
Manufacturer	BYD	
Capacitance	1700	mAh
Nominal voltage	3.8V	

AE2

Model	CAC170	0003C2
Manufacturer	SCUD	
Capacitance	1700	mAh
Nominal voltage	3.8V	

AE3

Model	CBA3007AG0C1
Manufacturer	BYD
Length of cable	/

AE4

Model	CBA3007AG0C2
Manufacturer	Tenpao

Length of cable	/
AE5	
Model	CDA3122005C1
Manufacturer	Juwei
Length of cable	100cm
AE6	
Model	CDA3122005C2
Manufacturer	Shenhua
Length of cable	100cm
AE7	
Model	CDA3122002C1
Manufacturer	Juwei
Length of cable	100cm
AE8	
Model	CDA3122002C2
Manufacturer	Shenhua
Length of cable	100cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1/AE2 + AE5	USB mode
Set.2	EUT1+ AE1/AE2 + AE3 + AE5	Charging mode1
Set.3	EUT1+ AE1/AE2 + AE4 + AE5	Charging mode 2

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-12 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters × 6.7meters × 6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber F AC-3 (9 meters × 6.5 meters × 4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P Pass	
	F Fail	
	NA Not applicable	applicable
	NM Not measured	measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

Clause	List	Clause in FCC rules	Verdict	Test Location
1 Radiated	Emission	15.109(a)	P	D
2 Conducted	Emission	15.107(a)	P	D

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH3-Z5	825562/028	R&S	2013-06-14
6	Universal Radio Communication Tester	CMU200	102228	R&S 2014	-06-23
7	PC	OPTIPLEX 755	3908243625	DELL	N/A
8	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL N/A	
9	Printer	LaserJet 1160	CNM2D33740	HP	N/A
10	Keyboard	L100	CN0RH659658 907ATOI40	DELL N/A	
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A
12	Universal Radio Communication Tester	CMW500 1274	06	R&S	2014-01-07

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz) Field	strength (microvolts/meter)
30-88 100	
88-216 150	
216-960 200	
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz) RBW/VBW	Sweep Time(s)
30-1000 120kHz IF Bandwidth	5
1000-4000 1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Set.1 USB mode_Peak detector

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
2996.800	54.4	-29.0	33.2	50.179	HORIZONTAL
2989.400	54.4	-29.0	33.2	50.179	HORIZONTAL
2994.200	54.4	-29.0	33.2	50.179	HORIZONTAL
2979.800	54.4	-29.0	33.1	50.279	HORIZONTAL
3000.000	54.3	-28.4	32.8	49.872	HORIZONTAL
2996.000	54.3	-29.0	33.2	50.079	HORIZONTAL

Set.1 USB mode_Average detector

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
2996.800	42.5	-29.0	33.2	38.279	HORIZONTAL
2989.400	42.2	-29.0	33.2	37.979	HORIZONTAL
2994.200	42.8	-29.0	33.2	38.579	HORIZONTAL
2979.800	42.0	-29.0	33.1	37.879	HORIZONTAL
3000.000	44.5	-28.4	32.8	40.072	HORIZONTAL
2996.000	42.7	-29.0	33.2	38.479	HORIZONTAL

Set.2 Charging mode_Peak detector

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2992.800	55.3	-29.0	33.2	51.079	HORIZONTAL
2974.000	54.8	-28.6	33.1	50.315	VERTICAL
2989.800	54.6	-29.0	33.2	50.379	VERTICAL
2994.000	54.5	-29.0	33.2	50.279	VERTICAL
2982.400	54.3	-29.0	33.2	50.079	VERTICAL
2987.600	54.3	-29.0	33.2	50.079	HORIZONTAL

Set.2 Charging mode_Average detector

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2992.800	42.5	-29.0	33.2	38.279	HORIZONTAL
2974.000	42.1	-28.6	33.1	37.615	VERTICAL
2989.800	42.5	-29.0	33.2	38.279	VERTICAL
2994.000	42.4	-29.0	33.2	38.179	VERTICAL
2982.400	42.0	-29.0	33.2	37.779	VERTICAL
2987.600	42.1	-29.0	33.2	37.879	HORIZONTAL

Set.3 Charging mode _Peak detector

Frequency(MHz)	Result(dBuV/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dBuV)	Polarity
2991.000	55.3	-29.0	33.2	51.079	VERTICAL
2942.600	54.7	-28.1	32.5	50.311	HORIZONTAL
2998.400	54.5	-29.0	33.2	50.279	VERTICAL
2997.800	54.4	-29.0	33.2	50.179	HORIZONTAL
2981.600	54.3	-29.0	33.2	50.079	HORIZONTAL
2997.400	54.3	-29.0	33.2	50.079	VERTICAL

Set.3 Charging mode _ Average detector

Frequency(MHz)	Result(dBuV/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dBuV)	Polarity
2991.000	42.4	-29.0	33.2	38.179	VERTICAL
2942.600	42.0	-28.1	32.5	37.611	HORIZONTAL
2998.400	42.6	-29.0	33.2	38.379	VERTICAL
2997.800	42.6	-29.0	33.2	38.379	HORIZONTAL
2981.600	42.2	-29.0	33.2	37.979	HORIZONTAL
2997.400	42.7	-29.0	33.2	38.479	VERTICAL

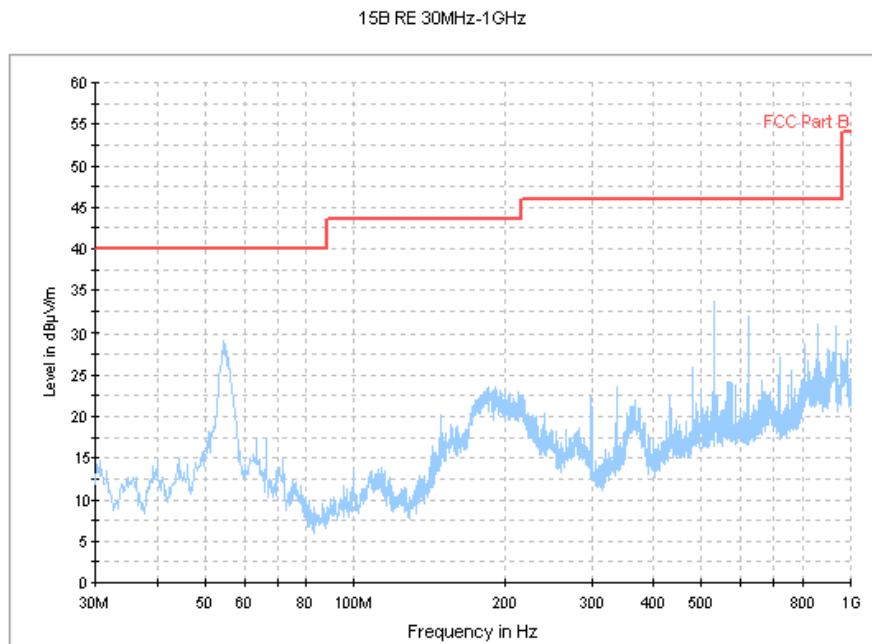


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, USB mode)

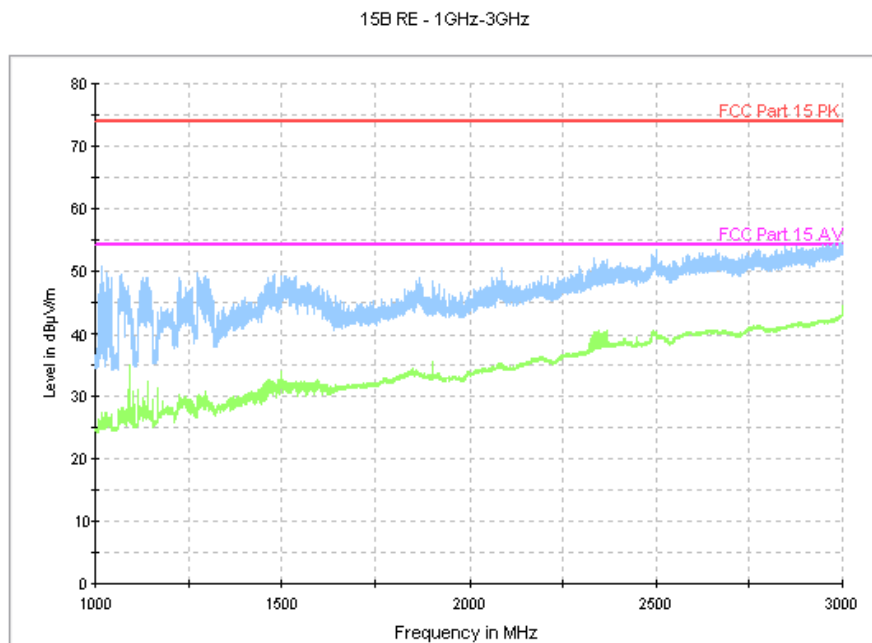


Figure A.2 Radiated Emission from 1GHz to 3GHz (Set.1, USB mode)

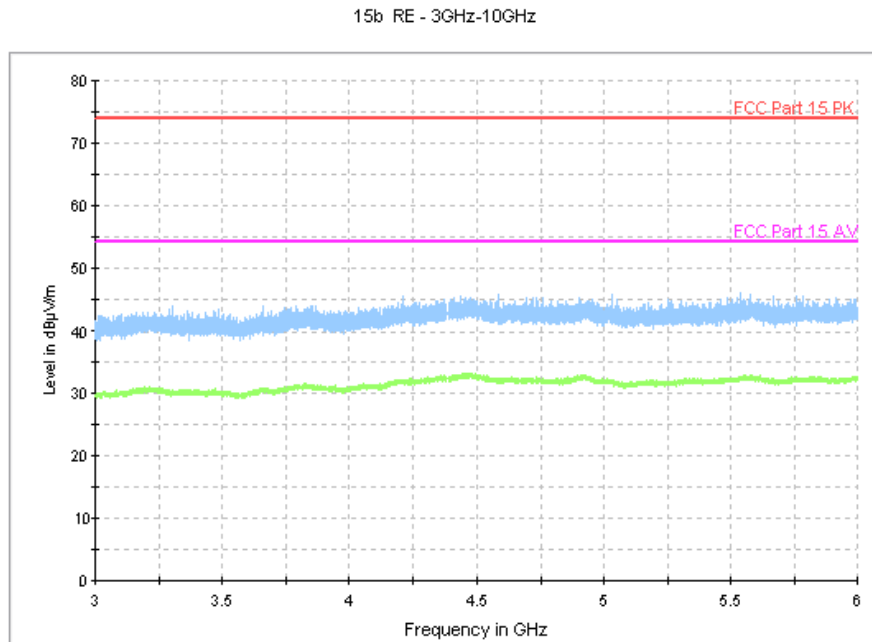


Figure A.3 Radiated Emission from 3GHz to 4GHz (Set.1, USB mode)

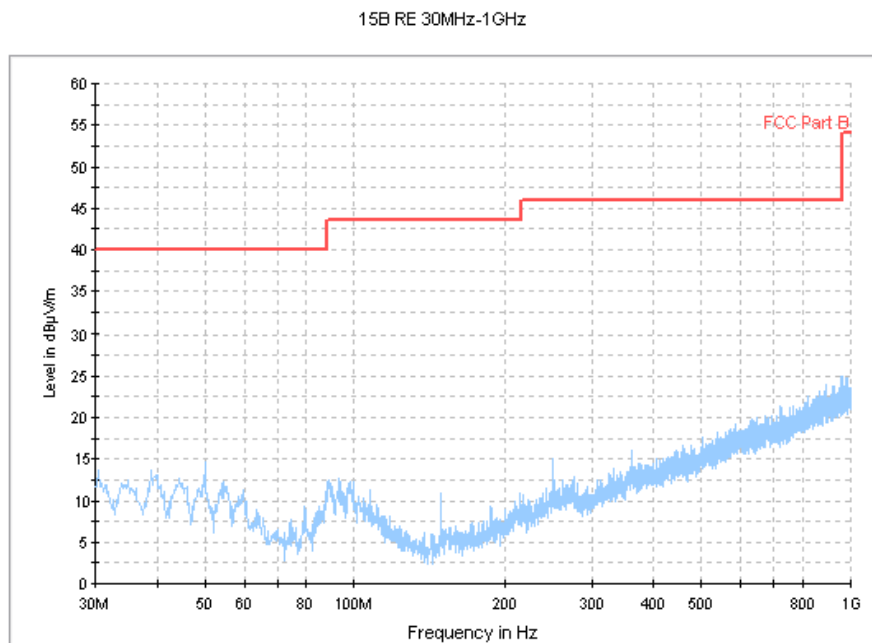


Figure A.4 Radiated Emission from 30MHz to 1GHz (Set.2, Charging mode)

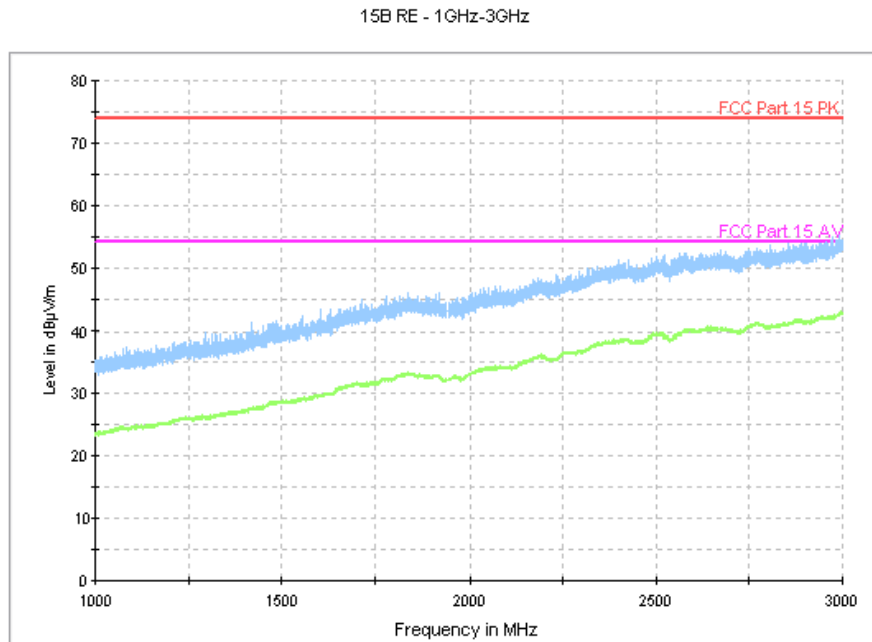


Figure A.5 Radiated Emission from 1GHz to 3GHz (Set.2, Charging mode)

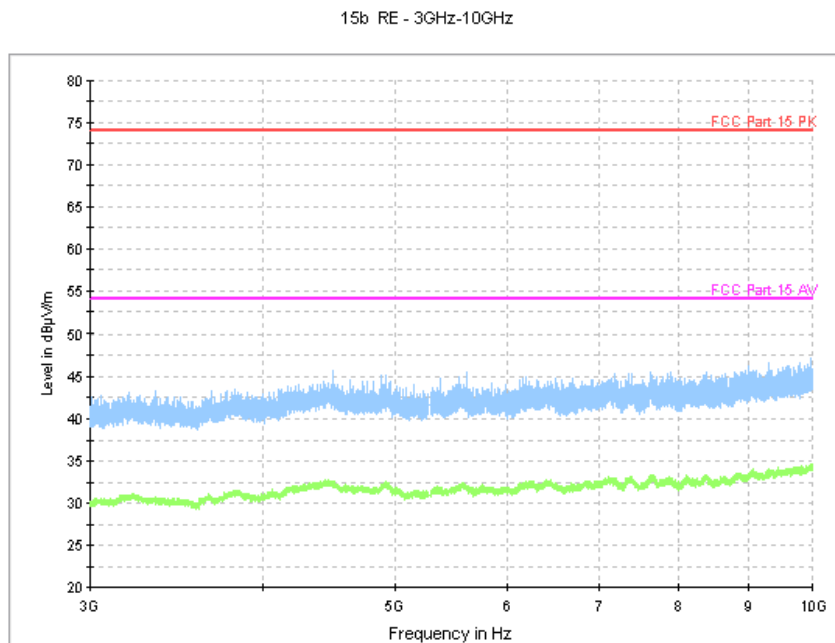


Figure A.6 Radiated Emission from 3GHz to 4GHz (Set.2, Charging mode)

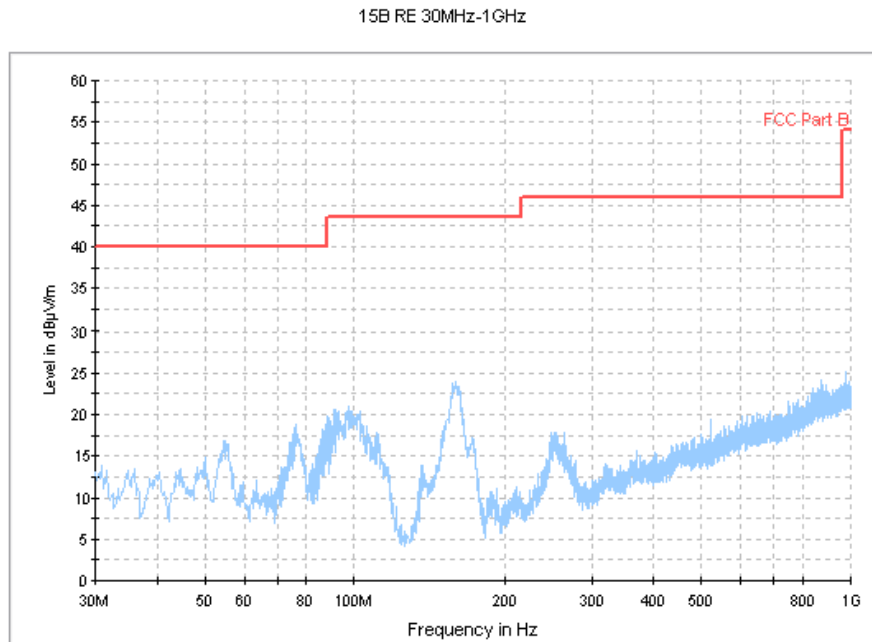


Figure A.7 Radiated Emission from 30MHz to 1GHz (Set.3, Charging mode)

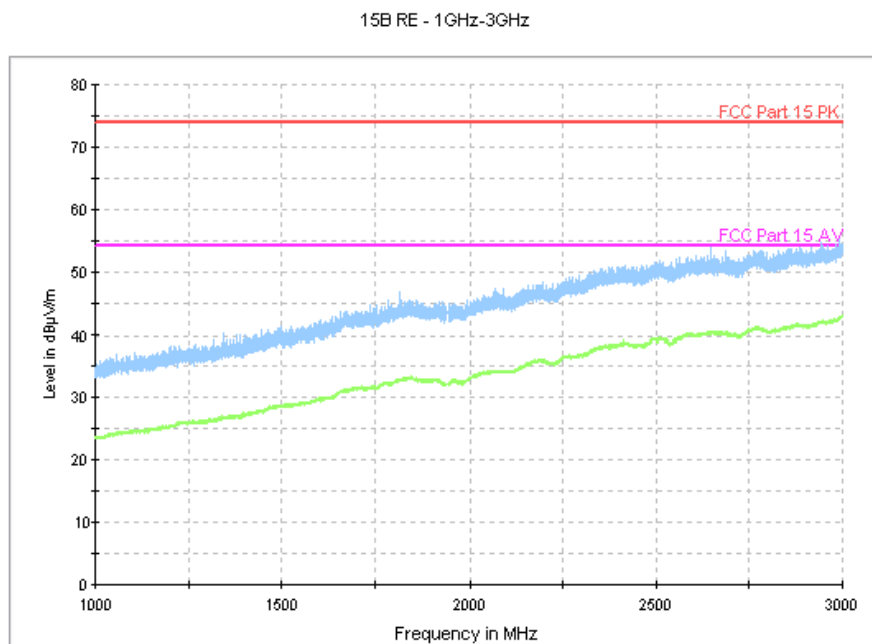


Figure A.8 Radiated Emission from 1GHz to 3GHz (Set.3, Charging mode)

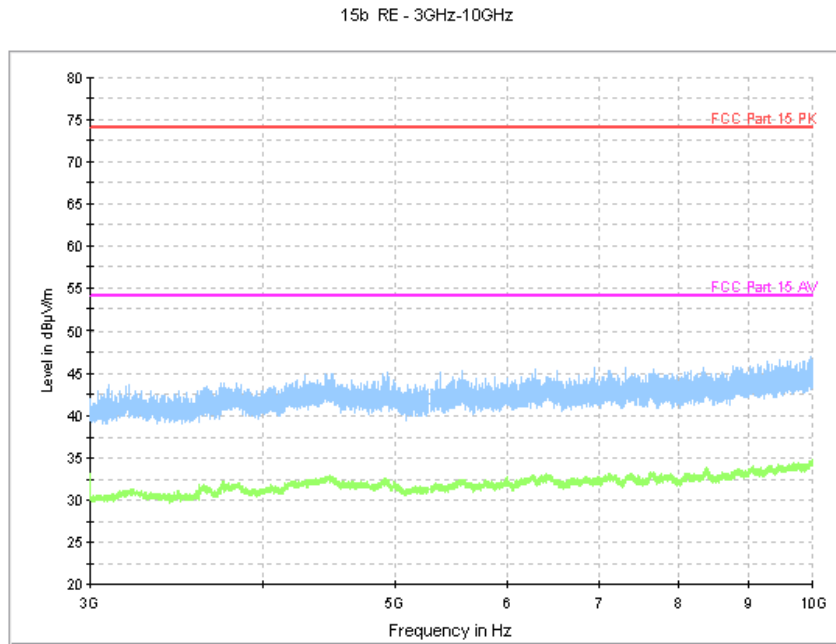


Figure A.9 Radiated Emission from 3GHz to 4GHz (Set.3, Charging mode)

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak A	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5.56		46
5-30.60		50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

IF Bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

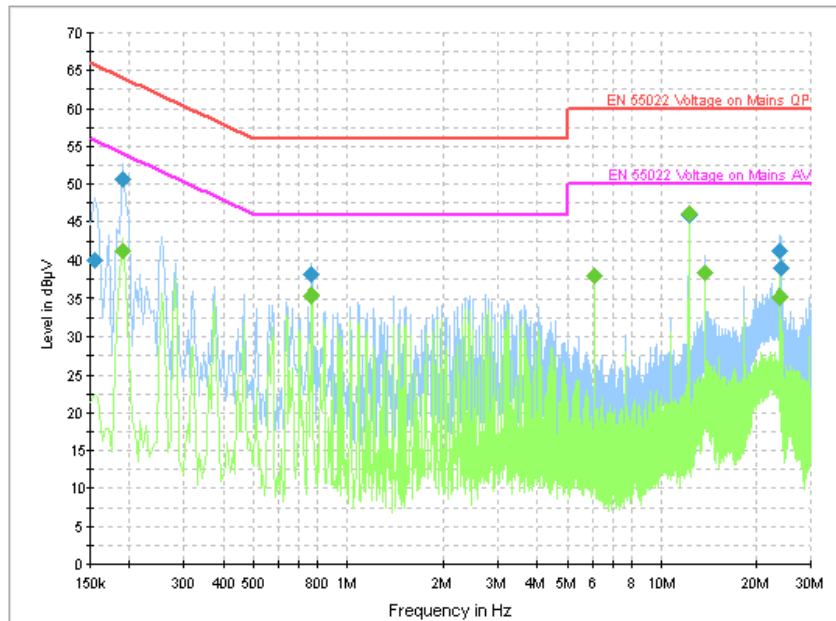


Figure A.10 Conducted Emission (Set.1, USB mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154501	40.0	GND	N	9.9	25.8	65.8
0.190501	50.7	GND	N	9.9	13.3	64.0
0.766501	38.1	GND	L1	9.9	17.9	56.0
12.201001	45.9	GND	N	9.7	14.1	60.0
23.977501	41.3	GND	L1	9.5	18.7	60.0
24.040501	38.8	GND	L1	9.5	21.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190501	41.1	GND	N	9.9	12.9	54.0
0.766501	35.4	GND	L1	9.9	10.6	46.0
6.099001	38.0	GND	N	9.8	12.0	50.0
12.201001	46.1	GND	N	9.7	3.9	50.0
13.726501	38.2	GND	N	9.6	11.8	50.0
23.977501	35.3	GND	L1	9.5	14.7	50.0

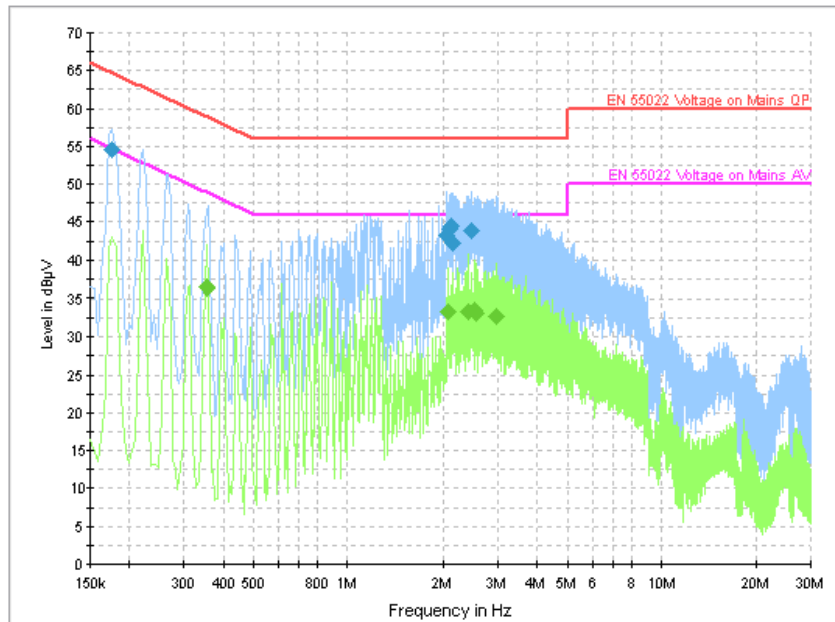


Figure A.11 Conducted Emission (Set.2, Charging mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177001	54.6	GND	N	9.9	10.0	64.6
2.058001	43.3	GND	N	9.9	12.7	56.0
2.089501	44.0	GND	N	9.9	12.0	56.0
2.121001	44.5	GND	N	9.9	11.5	56.0
2.152501	42.1	GND	N	9.9	13.9	56.0
2.463001	43.8	GND	N	9.9	12.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.352501	36.3	GND	N	9.9	12.6	48.9
2.076001	33.3	GND	N	9.9	12.7	46.0
2.418001	33.3	GND	N	9.9	12.7	46.0
2.526001	33.6	GND	N	9.9	12.4	46.0
2.557501	33.2	GND	N	9.9	12.8	46.0
2.962501	32.8	GND	N	9.9	13.2	46.0

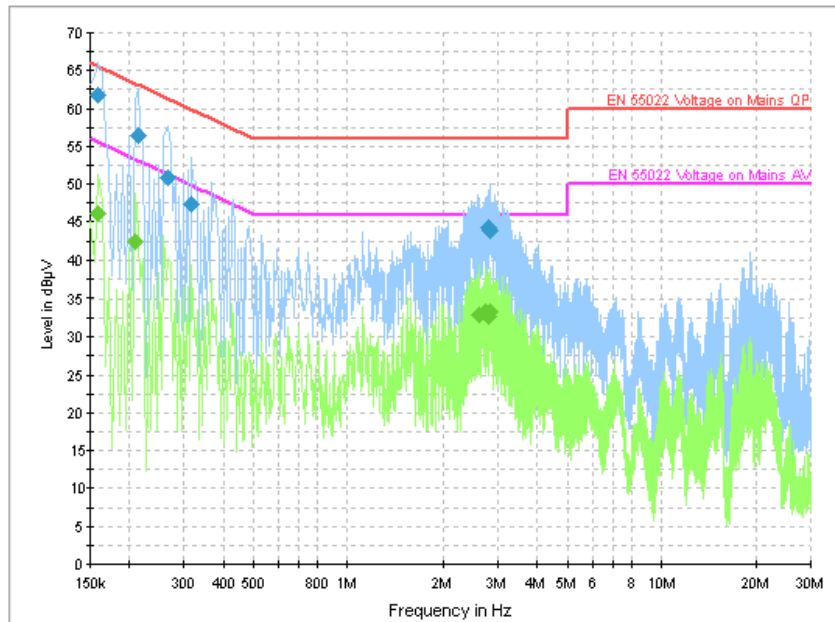


Figure A.12 Conducted Emission (Set.3, Charging mode)

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159001	61.9	GND	L1	9.9	3.7	65.5
0.213001	56.4	GND	L1	9.9	6.6	63.1
0.267001	50.9	GND	L1	9.9	10.3	61.2
0.316501	47.3	GND	L1	9.9	12.5	59.8
2.796001	44.3	GND	N	9.9	11.7	56.0
2.827501	44.0	GND	N	9.9	12.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159001	46.1	GND	L1	9.9	9.4	55.5
0.208501	42.5	GND	L1	9.9	10.8	53.3
2.611501	32.9	GND	N	9.9	13.1	46.0
2.719501	33.5	GND	N	9.9	12.5	46.0
2.782501	32.7	GND	N	9.9	13.3	46.0
2.827501	33.3	GND	N	9.9	12.7	46.0

END OF REPORT