



FCC SAR Test Report

APPLICANT : TCT Mobile Limited
EQUIPMENT : Tablet PC
BRAND NAME : ALCATEL
MODEL NAME : ONE TOUCH EVO 7HD / ONE TOUCH E710
(Module:one touch M600Y)
FCC ID : RAD402
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was integrated the WWAN Module (Brand Name: ALCATEL, Model Name: one touch M600Y, FCC ID: RAD383) during test.

The product was completely tested on Jun. 09, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL : 86-755-8637-9589

FAX : 86-755-8637-9595

FCC ID : RAD402

Page Number : 1 of 45

Report Issued Date : Jun. 21, 2013

Report Version : Rev. 01



Table of Contents

1. Statement of Compliance4

2. Administration Data5

 2.1 Testing Laboratory.....5

 2.2 Applicant5

 2.3 Manufacturer.....5

 2.4 Application Details.....5

3. General Information6

 3.1 Description of Equipment Under Test (EUT)6

 3.2 Maximum RF output power among production units.....7

 3.3 Applied Standard.....8

 3.4 Device Category and SAR Limits8

 3.5 Test Conditions.....8

4. Specific Absorption Rate (SAR).....9

 4.1 Introduction9

 4.2 SAR Definition.....9

5. SAR Measurement System.....10

 5.1 E-Field Probe10

 5.2 Data Acquisition Electronics (DAE)11

 5.3 Robot12

 5.4 Measurement Server.....12

 5.5 Phantom.....13

 5.6 Device Holder13

 5.7 Data Storage and Evaluation14

 5.8 Test Equipment List.....16

6. Tissue Simulating Liquids.....17

7. SAR System Verification18

 7.1 Purpose of System Performance check18

 7.2 System Setup.....18

 7.3 SAR System Verification Results19

8. EUT Testing Position20

9. Measurement Procedures20

 9.1 Spatial Peak SAR Evaluation.....20

 9.2 Power Reference Measurement.....21

 9.3 Area & Zoom Scan Procedures.....21

 9.4 Volume Scan Procedures.....22

 9.5 SAR Averaged Methods.....22

 9.6 Power Drift Monitoring.....22

10. Conducted RF Output Power (Unit: dBm).....23

11. Exposure Positions Consideration.....28

12. SAR Test Results31

 12.1 Test Records for Body SAR Test.....31

 12.2 Repeated SAR Measurement33

 12.3 Highest SAR Plot34

13. Simultaneous Multi-band Transmission Analysis.....39

 13.1 Tablet Body Co-location Simultaneous Transmission Analysis.....40

 13.2 Simultaneous analysis - SPLSR calculation.....42

14. Uncertainty Assessment43

15. References45

Appendix A. Plots of System Performance Check

Appendix B. Plots of SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA342211-01	Rev. 01	Initial issue of report	Jun. 21, 2013



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **TCT Mobile Limited**
DUT: Tablet PC, Brand Name: ALCATEL, Model Name: ONE TOUCH EVO 7HD / ONE TOUCH E710,
(Module:one touch M600Y) are as follows.

<Highest Reported Standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Body-worn (0cm Gap)	GSM850	0.25	PCB	1.44
	GSM1900	0.34		
	WCDMA Band V	0.31		
	WCDMA Band II	1.44		
	WLAN 2.4GHz Band	1.18	DTS	1.18

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM1900	PCB	Body (0cm Gap)	1.51
WLAN 2.4GHz Band	DTS		
GSM850	PCB	Body (1cm Gap)	1.44
Bluetooth	DSS		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595

2.2 Applicant

Company Name	TCT Mobile Limited
Address	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

2.3 Manufacturer

Company Name	TCL COMMUNICATION TECHNOLOGY HOLDINGS LIMITED
Address	70 Huifeng 4rd, ZhongKai Hi-tech Development District, Huizhou, Guangdong 516006 P.R.China (TCL Mobile Communication Co., LTD. Huizhou)

2.4 Application Details

Date of Start during the Test	Jun. 08, 2013
Date of End during the Test	Jun. 09, 2013



3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Tablet PC
Brand Name	ALCATEL
Model Name	ONE TOUCH EVO 7HD / ONE TOUCH E710 (Module:one touch M600Y)
FCC ID	RAD402
TX Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Antenna Type	WWAN: Monopole Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	JUPITER_MAIN_V6.0
SW Version	UPDATA_111_104
Type of Modulation	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA (Rel 99): QPSK HSDPA (Rel 6): QPSK HSUPA (Rel 6): QPSK HSPA+ (Rel 7): 16QAM (Downlink Only) 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit
Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	



3.2 Maximum RF output power among production units

Maximum Target Burst Average Power for Production Unit		
Mode / Band	GSM 850	GSM 1900
GPRS/ EDGE (GMSK, 1 Tx slot)	34	31
GPRS/ EDGE (GMSK, 2 Tx slots)	29	27
GPRS/ EDGE (GMSK, 3 Tx slots)	27	25
GPRS/ EDGE (GMSK, 4 Tx slots)	26	24
EDGE (8PSK, 1 Tx slot)	27	26
EDGE (8PSK, 2 Tx slots)	24	23
EDGE (8PSK, 3 Tx slots)	23	22
EDGE (8PSK, 4 Tx slots)	21	20

Maximum Target Power for Production Unit		
Mode / Band	WCDMA Band V	WCDMA Band II
RMC 12.2K	24	22.5
HSDPA Subtest-1	23	22
HSDPA Subtest-2	23	22
HSDPA Subtest-3	23	22
HSDPA Subtest-4	23	22
HSUPA Subtest-1	22	21.5
HSUPA Subtest-2	22	21.5
HSUPA Subtest-3	22	21.5
HSUPA Subtest-4	22	21.5
HSUPA Subtest-5	22	21.5

Maximum Target Average Power for Production Unit					
Mode/Band	a	b	g	n-HT20	n-HT40
WLAN 2.4GHz Band		13.5	14	14	13.5

Maximum Target Average Power for Production Unit			
Mode / Band	1Mbps (GFSK)	2Mbps (π/4-DQPSK)	3Mbps (8-DPSK)
Bluetooth	6	4	5



3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05
- FCC KDB 248227 D01 v01r02
- FCC KDB 616217 D04 v01
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 865664 D01 v01

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

Duty factor observed as below:

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

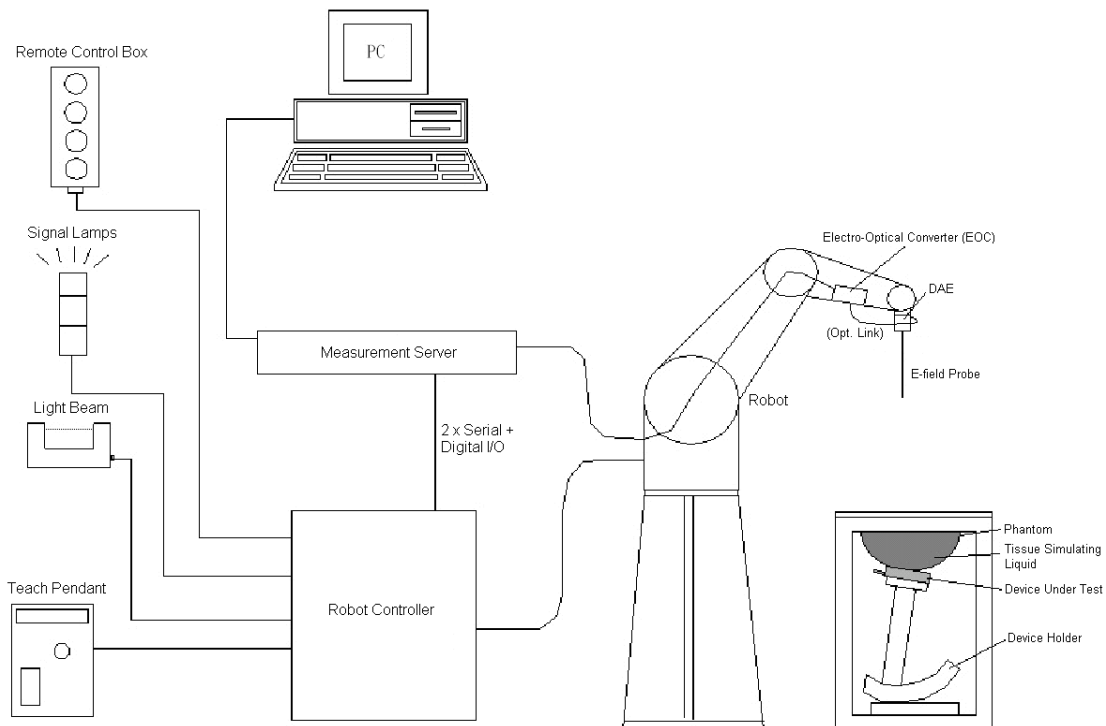


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically $< 1 \mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

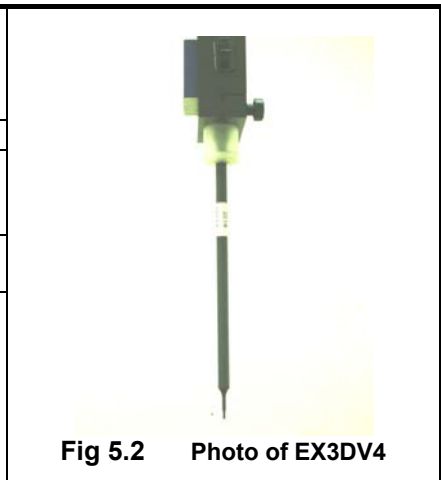


Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

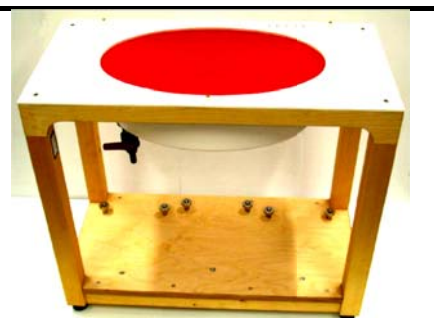


Fig 5.6 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

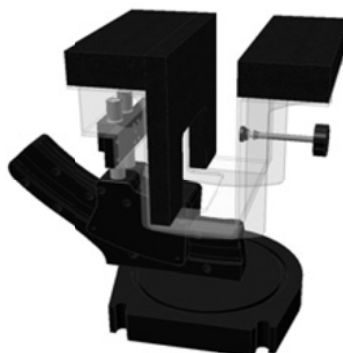


Fig 5.7 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
	Media parameters :	- Conductivity
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 16, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 16, 2013
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	Data Acquisition Electronics	DAE4	1303	Nov. 22, 2012	Nov. 21, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 26, 2012	Nov. 25, 2013
SPEAG	ELI4 Phantom	SM 000 T01 DA	1149	NCR	NCR
SPEAG	Test Arch Phantom	Par phantom	1105	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Base Station	E5515C	MY50267224	Dec. 29, 2012	Dec. 28, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	Aug. 31, 2012	Aug. 30, 2013
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
AR	Amplifier	551G4	333096	NCR	NCR
Anritsu	Power Meter	ML2495A	1218010	Mar. 28, 2013	Mar. 27, 2014
Anritsu	Power Sensor	MA2411B	1207253	Mar. 28, 2013	Mar. 27, 2014
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005-3	N/A	Note 4	
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	0328767	Note 6	
R&S	Spectrum Analyzer	FSP30	100818	Aug. 22, 2012	Aug. 21, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118 and D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
7. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Body	21.8	0.968	57.458	0.97	55.2	-0.21	4.09	±5	Jun. 08, 2013
1900	Body	21.5	1.528	54.867	1.52	53.3	0.53	2.94	±5	Jun. 08, 2013
2450	Body	21.5	1.976	54.13	1.95	52.7	1.33	2.71	±5	Jun. 09, 2013

Table 6.2 Measuring Results for Simulating Liquid

7. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

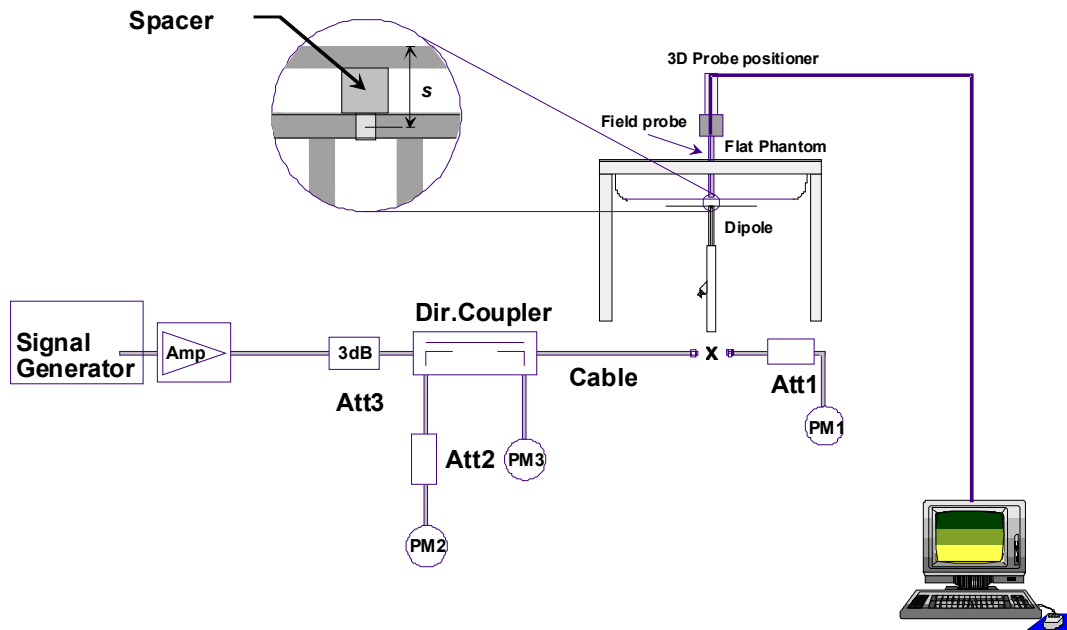


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Jun. 08, 2013	835	Body	250	9.42	2.35	9.4	-0.21
Jun. 08, 2013	1900	Body	250	41.8	10.2	40.8	-2.39
Jun. 09, 2013	2450	Body	250	52.3	13.8	55.2	5.54

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

This EUT was tested in seven different positions. They are bottom-face, Edge1, Edge2, Edge3, Edge4, Curved surface of Edge2 and Curved surface of Edge3. In these positions, the surface of EUT is touching with phantom 0cm. Please refer to Appendix D for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

For any secondary peaks found in the area scan which are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan should be repeated

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom(n)}	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid Δz _{Zoom(1)} : between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	Δz _{Zoom(n>1)} : between subsequent points	≤ 1.5·Δz _{Zoom(n-1)}	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>I.g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. The DUT do not support DTM function.
3. For Body SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS 1 Tx slot for GSM850 and GSM1900 due to its highest frame-average power.

Band: GSM850 Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GPRS (GMSK, 1 Tx slot) – CS1	32.42	32.62	32.85	23.42	23.62	23.85
GPRS (GMSK, 2 Tx slots) – CS1	28.57	28.75	28.97	22.57	22.75	22.97
GPRS (GMSK, 3 Tx slots) – CS1	26.55	26.74	26.97	22.29	22.48	22.71
GPRS (GMSK, 4 Tx slots) – CS1	25.53	25.74	25.94	22.53	22.74	22.94
EDGE (GMSK, 1 Tx slot) – MCS1	32.40	32.61	32.84	23.40	23.61	23.84
EDGE (GMSK, 2 Tx slots) – MCS1	28.50	28.72	28.96	22.50	22.72	22.96
EDGE (GMSK, 3 Tx slots) – MCS1	26.50	26.70	26.91	22.24	22.44	22.65
EDGE (GMSK, 4 Tx slots) – MCS1	25.51	25.71	25.90	22.51	22.71	22.90
EDGE (8PSK, 1 Tx slot) – MCS5	26.33	26.57	26.80	17.33	17.57	17.80
EDGE (8PSK, 2 Tx slots) – MCS5	23.42	23.63	23.89	17.42	17.63	17.89
EDGE (8PSK, 3 Tx slots) – MCS5	22.41	22.62	22.82	18.15	18.36	18.56
EDGE (8PSK, 4 Tx slots) – MCS5	20.41	20.58	20.79	17.41	17.58	17.79

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band: GSM1900 Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GPRS (GMSK, 1 Tx slot) – CS1	29.32	29.45	29.57	20.32	20.45	20.57
GPRS (GMSK, 2 Tx slots) – CS1	26.30	26.45	26.56	20.30	20.45	20.56
GPRS (GMSK, 3 Tx slots) – CS1	24.31	24.46	24.58	20.05	20.20	20.32
GPRS (GMSK, 4 Tx slots) – CS1	23.32	23.46	23.56	20.32	20.46	20.56
EDGE (GMSK, 1 Tx slot) – MCS1	29.30	29.42	29.54	20.30	20.42	20.54
EDGE (GMSK, 2 Tx slots) – MCS1	26.25	26.41	26.54	20.25	20.41	20.54
EDGE (GMSK, 3 Tx slots) – MCS1	24.30	24.44	24.52	20.04	20.18	20.26
EDGE (GMSK, 4 Tx slots) – MCS1	23.30	23.42	23.51	20.30	20.42	20.51
EDGE (8PSK, 1 Tx slot) – MCS5	24.99	25.21	25.41	15.99	16.21	16.41
EDGE (8PSK, 2 Tx slots) – MCS5	22.19	22.33	22.53	16.19	16.33	16.53
EDGE (8PSK, 3 Tx slots) – MCS5	21.19	21.37	21.56	16.93	17.11	17.30
EDGE (8PSK, 4 Tx slots) – MCS5	19.20	19.41	19.55	16.20	16.41	16.55

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration



<WCDMA Conducted Power>

Note:

1. By design, HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
2. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Band		WCDMA Band V			WCDMA Band II		
Tx Channel		4132	4182	4233	9262	9400	9538
Rx Channel		4357	4407	4458	9662	9800	9938
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6
3GPP Rel 99	RMC 12.2Kbps	22.58	22.29	22.37	21.84	21.98	22.10
3GPP Rel 6	HSDPA Subtest-1	22.50	22.24	22.27	21.74	21.88	21.97
3GPP Rel 6	HSDPA Subtest-2	22.45	22.20	22.22	21.70	21.85	21.95
3GPP Rel 6	HSDPA Subtest-3	22.40	22.15	22.20	21.61	21.77	21.87
3GPP Rel 6	HSDPA Subtest-4	22.35	22.10	22.17	21.60	21.76	21.86
3GPP Rel 6	HSUPA Subtest-1	21.80	21.53	21.55	20.94	21.07	21.17
3GPP Rel 6	HSUPA Subtest-2	21.91	21.67	21.71	21.12	21.27	21.38
3GPP Rel 6	HSUPA Subtest-3	21.90	21.64	21.68	21.11	21.24	21.30
3GPP Rel 6	HSUPA Subtest-4	21.91	21.65	21.70	21.20	21.33	21.40
3GPP Rel 6	HSUPA Subtest-5	21.39	21.12	21.16	20.63	20.77	20.88
3GPP MPR specification	MPR result	WCDMA Band V			WCDMA Band II		
0	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00
0	HSDPA Subtest-2	0.05	0.04	0.05	0.04	0.03	0.02
≤0.5	HSDPA Subtest-3	0.10	0.09	0.07	0.13	0.11	0.10
≤0.5	HSDPA Subtest-4	0.15	0.14	0.10	0.14	0.12	0.11
≤0	HSUPA Subtest-1	-0.41	-0.41	-0.39	-0.31	-0.30	-0.29
≤2	HSUPA Subtest-2	-0.52	-0.55	-0.55	-0.49	-0.50	-0.50
≤1	HSUPA Subtest-3	-0.51	-0.52	-0.52	-0.48	-0.47	-0.42
≤2	HSUPA Subtest-4	-0.52	-0.53	-0.54	-0.57	-0.56	-0.52
≤0	HSUPA Subtest-5	0.00	0.00	0.00	0.00	0.00	0.00



<WLAN 2.4GHz Conducted Power>

802.11b Average Power (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412	12.96	12.92	12.04	11.59
CH 06	2437	13.13	13.12	12.21	12.31
CH 11	2462	13.42	13.35	12.71	12.53

802.11g Average Power (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 01	2412	13.19	13.19	13.20	13.26	13.25	13.28	13.32	12.90
CH 06	2437	13.51	13.49	13.51	13.54	13.53	13.52	13.50	13.48
CH 11	2462	13.58	13.54	13.52	13.51	13.49	13.47	13.50	13.52

WLAN 2.4GHz Band 802.11n-HT20 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	13.29	13.28	13.32	12.86	12.93	12.73	12.54	13.03
CH 06	2437	13.59	13.60	13.57	13.59	13.61	13.60	13.56	13.58
CH 11	2462	13.63	13.61	13.61	13.59	13.60	13.58	13.58	13.57

WLAN 2.4GHz Band 802.11n-HT40 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422	11.88	11.89	11.84	11.79	11.65	11.70	11.69	11.69
CH 06	2437	13.18	13.22	13.17	13.11	13.14	13.20	13.23	13.22
CH 09	2452	13.35	13.33	13.27	13.28	13.31	13.26	13.25	13.13

Note:

- Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
- For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
- Per KDB 248227 D01 v01r02, 11g, 11n-HT20 and 11n-HT40 average power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded. But 11g and 11n-HT20 tune up power is higher than 1/4dB higher than 11b mode, these modes SAR will be verified at the highest RF exposure position found in 802.11b SAR testing. 11n-HT40 tune-up power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<Bluetooth Conducted Power>

Bluetooth Average Power (dBm)										
Channel	Frequency (MHz)	Data Rate								
		DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
CH 00	2402	5.72	4.12	3.66	3.36	1.18	0.50	3.27	1.14	0.34
CH 39	2441	5.86	3.93	3.51	3.17	1.14	0.54	3.30	1.18	0.44
CH 78	2480	5.88	4.49	4.12	3.58	1.79	1.13	4.65	1.80	1.03

Note:


- Per KDB 447498 D01v05, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
6	3.98	0	2.48	1.25

Per KDB 447498 D01v05 exclusion thresholds is 1.25 < 3, RF exposure evaluation is not required.

11. Exposure Positions Consideration

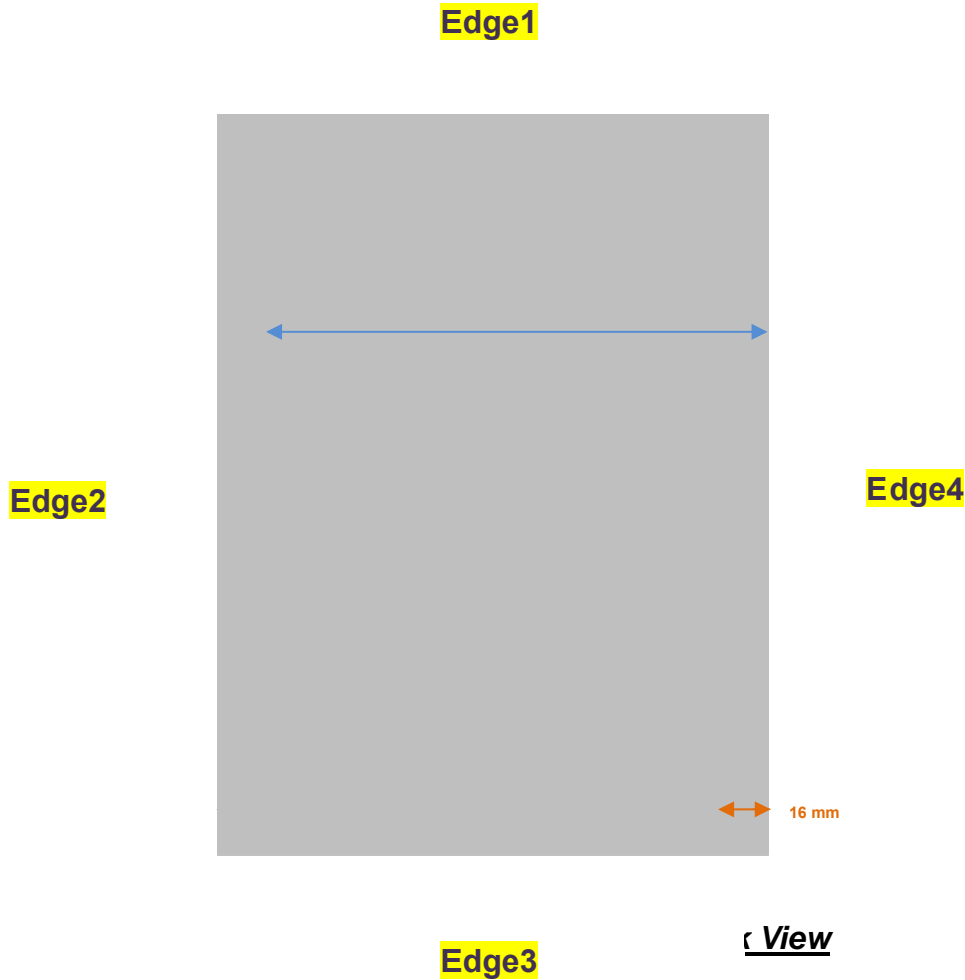

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM850
	GSM1900
	WCDMA Band V
	WCDMA Band II
Bluetooth & WLAN Antenna (Tx / Rx)	WLAN 2.4GHz
	Bluetooth



SAR test exclusion table distance is ≤ 50mm

Exposure Position	Wireless Interface	GPRS850 1 Tx slot	GPRS1900 1 Tx slot	WCDMA Band V	WCDMA Band II	802.11b	802.11g	802.11n HT20
		Tune-up Maximum power (dBm)	34	31	24	22.5	13.5	14
Bottom Face	Antenna to user (mm)	5				5	5	5
	SAR exclusion threshold	462.62	347.88	46.21	49.11	7.03	7.88	7.88
	SAR testing required?	Yes	Yes	Yes	Yes	YES	YES	YES
Edge 1	Antenna to user (mm)							
	SAR exclusion threshold							
	SAR testing required?							
Edge 2	Antenna to user (mm)					5	5	5
	SAR exclusion threshold					7.03	7.88	7.88
	SAR testing required?					YES	YES	YES
Edge 3	Antenna to user (mm)	5						
	SAR exclusion threshold	462.62	347.88	46.21	49.11			
	SAR testing required?	Yes	Yes	Yes	Yes			
Edge 4	Antenna to user (mm)	16						
	SAR exclusion threshold	144.57	108.71	14.44	15.35			
	SAR testing required?	Yes	Yes	Yes	Yes			



SAR test exclusion table distance is > 50mm

Exposure Position	Wireless Interface	GPRS850 1 Tx slot	GPRS1900 1 Tx slot	WCDMA Band V	WCDMA Band II	802.11b	802.11g	802.11n HT20
	Tune-up Maximum power (dBm)	34	31	24	22.5	13.5	14	14
	Tune-up Maximum rated power (mW)	2511.89	1258.93	251.19	177.83	22.39	25.12	25.12
Edge 1	Antenna to user (mm)	182				60	60	60
	SAR exclusion threshold (mW)	909.13	1428.56	907.56	1428.62	195.6	195.6	195.6
	SAR testing required?	Yes	No	No	No	No	No	No
Edge 2	Antenna to user (mm)	53						
	SAR exclusion threshold (mW)	179.85	138.56	180	138.62			
	SAR testing required?	Yes	Yes	Yes	Yes			
Edge 3	Antenna to user (mm)					120	120	120
	SAR exclusion threshold (mW)					795.6	795.6	795.6
	SAR testing required?					No	No	No
Edge 4	Antenna to user (mm)					114	114	114
	SAR exclusion threshold (mW)					735.6	735.6	735.6
	SAR testing required?					No	No	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05, for larger devices, the *test separation distance* is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v05, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
 This formula is $[3.0] / [\sqrt{f(GHz)}] \cdot [(min. test separation distance, mm)] =$ exclusion threshold of mW.
- Per KDB 447498 D01v05, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

12. SAR Test Results

Note:

- Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 $Scaling\ Factor = \frac{tune-up\ limit\ power\ (mW)}{EUT\ RF\ power\ (mW)}$, where tune-up limit is the maximum rated power among all production units.
 $Reported\ SAR(W/kg) = Measured\ SAR(W/kg) * Scaling\ Factor$
- Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Considering the curvature transition from bottom face to the edge, SAR testing at the curvature was performed. The SAR test setup is included in test setup photo exhibit, and the details of the curvature are included in operation description exhibit.

12.1 Test Records for Body SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#18	GSM850	GPRS(1 Tx slot)	Bottom Face	0	251	848.8	32.85	34	1.303	-0.08	0.192	0.250
#31	GSM850	GPRS(1 Tx slot)	Edge 1	0	251	848.8	32.85	34	1.303	-0.02	0.00348	0.005
#19	GSM850	GPRS(1 Tx slot)	Edge 2	0	251	848.8	32.85	34	1.303	-0.06	0.00136	0.002
#20	GSM850	GPRS(1 Tx slot)	Edge 3	0	251	848.8	32.85	34	1.303	-0.07	0.109	0.142
#21	GSM850	GPRS(1 Tx slot)	Edge 4	0	251	848.8	32.85	34	1.303	-0.11	0.00156	0.002
#23	GSM850	GPRS(1 Tx slot)	Curved surface of Edge3	0	251	848.8	32.85	34	1.303	-0.09	0.167	0.218
#10	GSM1900	GPRS(1 Tx slot)	Bottom Face	0	810	1909.8	29.57	31	1.390	-0.11	0.235	0.327
#11	GSM1900	GPRS(1 Tx slot)	Edge 2	0	810	1909.8	29.57	31	1.390	0.16	0.012	0.017
#12	GSM1900	GPRS(1 Tx slot)	Edge 3	0	810	1909.8	29.57	31	1.390	-0.09	0.232	0.322
#13	GSM1900	GPRS(1 Tx slot)	Edge 4	0	810	1909.8	29.57	31	1.390	-0.08	0.015	0.021
#15	GSM1900	GPRS(1 Tx slot)	Curved surface of Edge3	0	810	1909.8	29.57	31	1.390	-0.16	0.247	0.343

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#25	WCDMA Band V	RMC 12.2K	Bottom Face	0	4132	826.4	22.58	24	1.387	-0.12	0.225	0.312
#26	WCDMA Band V	RMC 12.2K	Edge 2	0	4132	826.4	22.58	24	1.387	0.06	0.0472	0.065
#27	WCDMA Band V	RMC 12.2K	Edge 3	0	4132	826.4	22.58	24	1.387	-0.06	0.126	0.175
#28	WCDMA Band V	RMC 12.2K	Edge 4	0	4132	826.4	22.58	24	1.387	-0.06	0.018	0.025
#30	WCDMA Band V	RMC 12.2K	Curved surface of Edge3	0	4132	826.4	22.58	24	1.387	-0.15	0.216	0.300
#01	WCDMA Band II	RMC 12.2K	Bottom Face	0	9538	1907.6	22.10	22.5	1.096	-0.08	0.565	0.620
#02	WCDMA Band II	RMC 12.2K	Edge 2	0	9538	1907.6	22.10	22.5	1.096	-0.01	0.039	0.043
#03	WCDMA Band II	RMC 12.2K	Edge 3	0	9538	1907.6	22.10	22.5	1.096	0.11	0.678	0.743
#04	WCDMA Band II	RMC 12.2K	Edge 4	0	9538	1907.6	22.10	22.5	1.096	0.02	0.00116	0.001
#06	WCDMA Band II	RMC 12.2K	Curved surface of Edge3	0	9538	1907.6	22.10	22.5	1.096	-0.17	0.749	0.821
#07	WCDMA Band II	RMC 12.2K	Curved surface of Edge3	0	9262	1852.4	21.84	22.5	1.164	-0.05	1.240	1.444
#08	WCDMA Band II	RMC 12.2K	Curved surface of Edge3	0	9400	1880	21.98	22.5	1.127	-0.07	0.629	0.709



<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#32	WLAN 2.4GHz	802.11b	Bottom Face	0	11	2462	1M	13.42	13.5	1.019	-0.02	1.160	1.182
#33	WLAN 2.4GHz	802.11b	Edge 2	0	11	2462	1M	13.42	13.5	1.019	-0.12	0.534	0.544
#34	WLAN 2.4GHz	802.11b	Bottom Face	0	1	2412	1M	12.96	13.5	1.132	0.01	0.812	0.920
#35	WLAN 2.4GHz	802.11b	Bottom Face	0	6	2437	1M	13.13	13.5	1.089	0.03	0.860	0.936
#36	WLAN 2.4GHz	802.11b	Curved surface of Edge2	0	11	2462	1M	13.42	13.5	1.019	-0.05	0.739	0.753
#37	WLAN 2.4GHz	802.11g	Bottom Face	0	11	2462	6M	13.58	14	1.102	0.01	0.718	0.791
#38	WLAN 2.4GHz	802.11n HT20	Bottom Face	0	11	2462	MCS0	13.63	14	1.089	-0.04	0.909	0.990
#39	WLAN 2.4GHz	802.11n HT20	Bottom Face	0	1	2412	MCS0	13.29	14	1.178	0.02	0.933	1.099
#40	WLAN 2.4GHz	802.11n HT20	Bottom Face	0	6	2437	MCS0	13.59	14	1.099	-0.02	1.070	1.176



12.2 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Data Rate	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Ratio	Reported SAR _{1g} (W/kg)
#07	WCDMA Band II	RMC 12.2K	Curved surface of Edge3	0	9262	1852.4	-	21.84	22.5	1.164	-0.05	1.240	1	1.444
#17	WCDMA Band II	RMC 12.2K	Curved surface of Edge3	0	9262	1852.4	-	21.84	22.5	1.164	-0.12	1.220	1.016	1.420
#32	WLAN 2.4GHz	802.11b	Bottom Face	0	11	2462	1M	13.42	13.5	1.019	-0.02	1.160	1	1.182
#41	WLAN 2.4GHz	802.11b	Bottom Face	0	11	2462	1M	13.42	13.5	1.019	-0.15	1.120	1.036	1.141

Note:

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12.3 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 08.06.2013

#18 GSM 850_GPRS(1 Tx slot)_Bottom Face_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (91x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.346 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.366 mW/g

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.291 W/kg

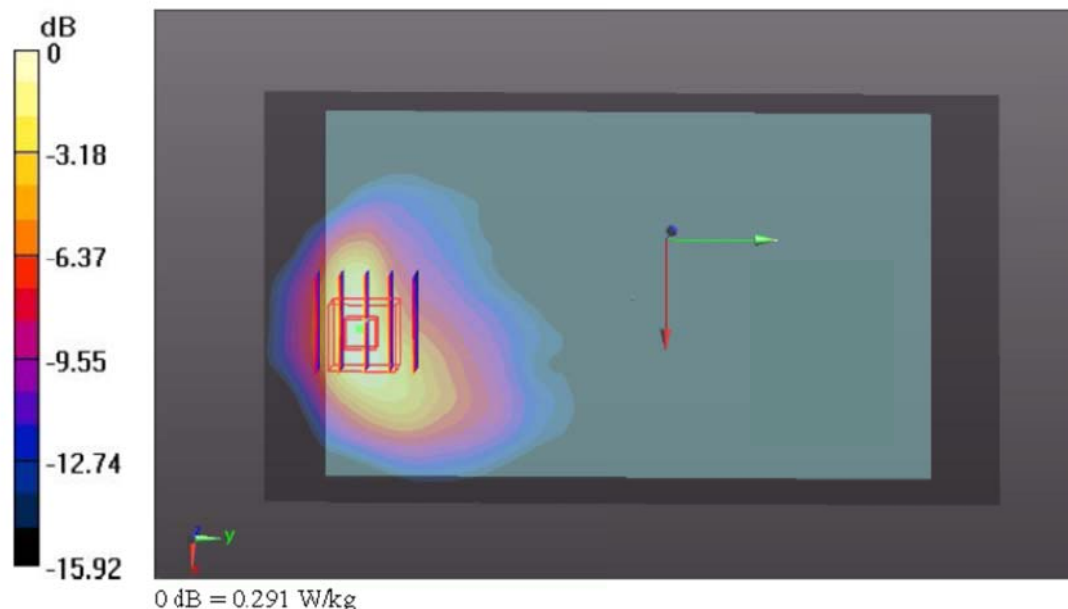

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 08.06.2013

#15 GSM1900_GPRS(1 Tx slot)_Curved surface of Edge3_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz, $\sigma = 1.536$ mho/m, $\epsilon_r =$

54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012

- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149

- Measurement SW: DASY52, Version 52.3 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (10x13x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.433 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.515 mW/g

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.376 W/kg

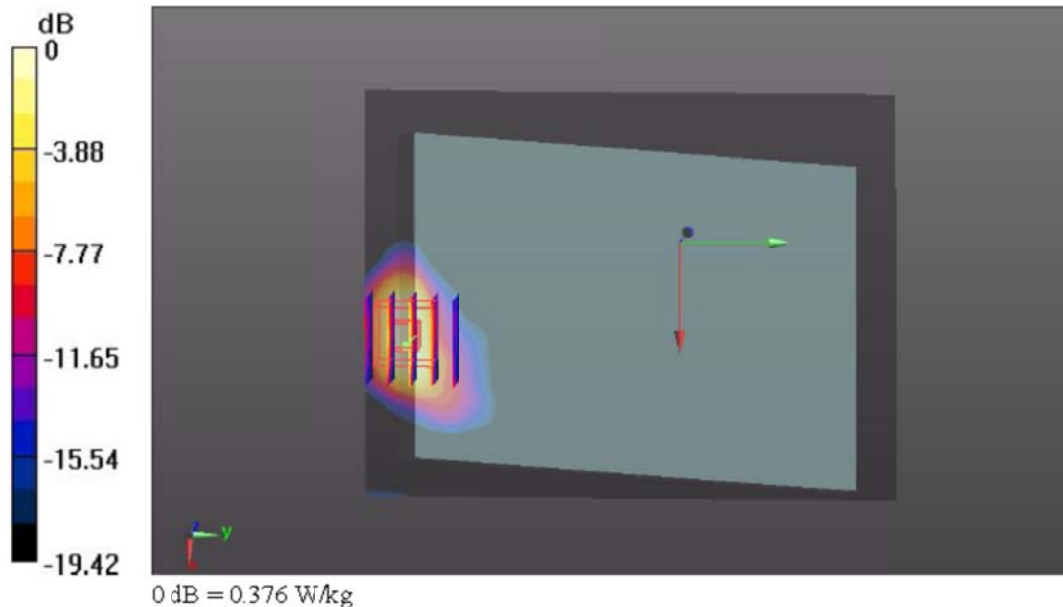

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 08.06.2013

#25 WCDMA Band V_RMC 12.2K_Bottom Face_0cm_Ch4132

DUT: 342211-01


Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: MSL_835_130608 Medium parameters used: $f = 826.4 \text{ MHz}$, $\sigma = 0.96 \text{ mho/m}$, $\epsilon_r = 57.537$,
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.8 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8(2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (91x161x1): Interpolated grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.347 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value= 6.999 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.426 mW/g
SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.120 mW/g
 Maximum value of SAR (measured) = 0.333 W/kg

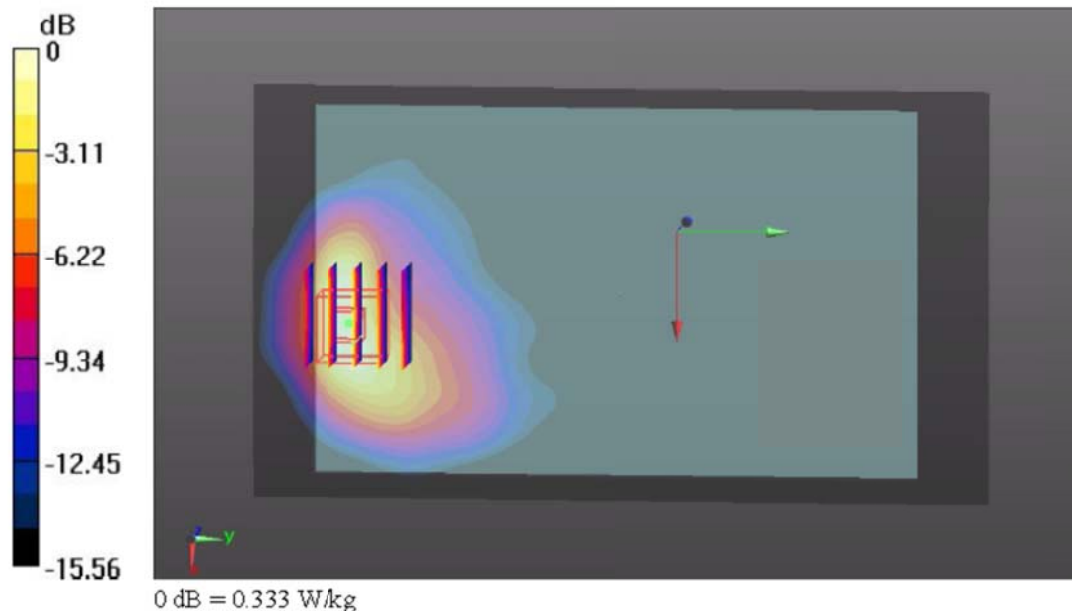

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 08.06.2013

#07 WCDMA Band II_RMC 12.2K_Curved surface of Edge3_0cm_Ch9262

DUT: 342211-01

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$

54.965 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012

- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.15 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.041 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.606 mW/g

SAR(1 g) = 1.240 mW/g SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 1.89 W/kg

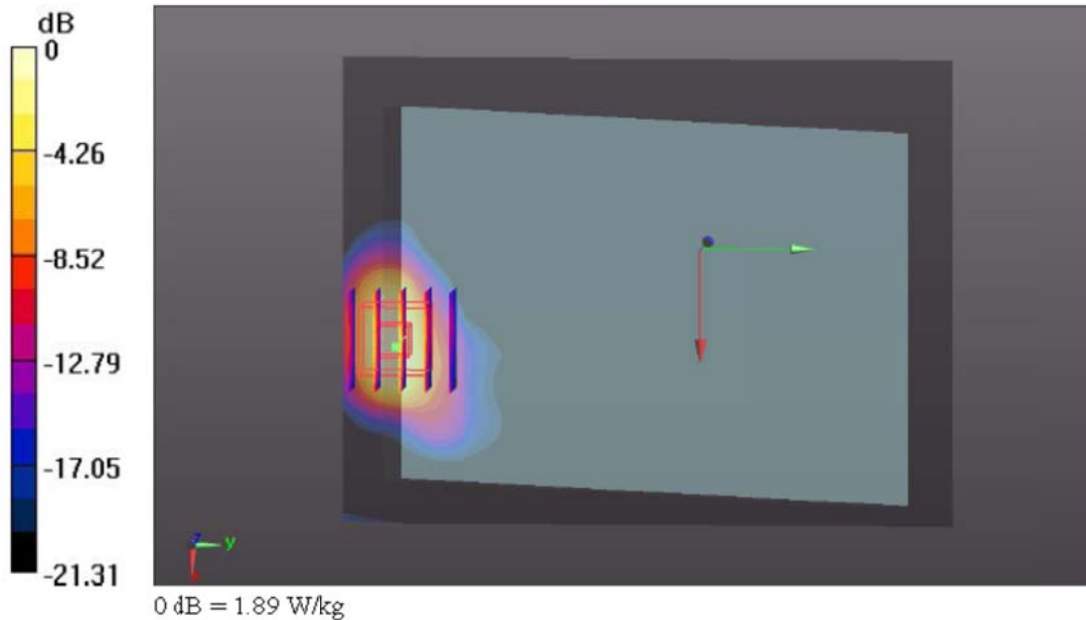

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 09.06.2013

#32 WLAN 2.4GHz 802.11b_Bottom Face_0cm_Ch11

DUT: 342211-01


Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium: MSL_2450_130609 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 54.071$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21), Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (131x191x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (interpolated) = 2.13 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 31.843 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 3.391 mW/g
SAR(1 g) = 1.160 mW/g SAR(10 g) = 0.447 mW/g
 Maximum value of SAR (measured) = 2.04 W/kg

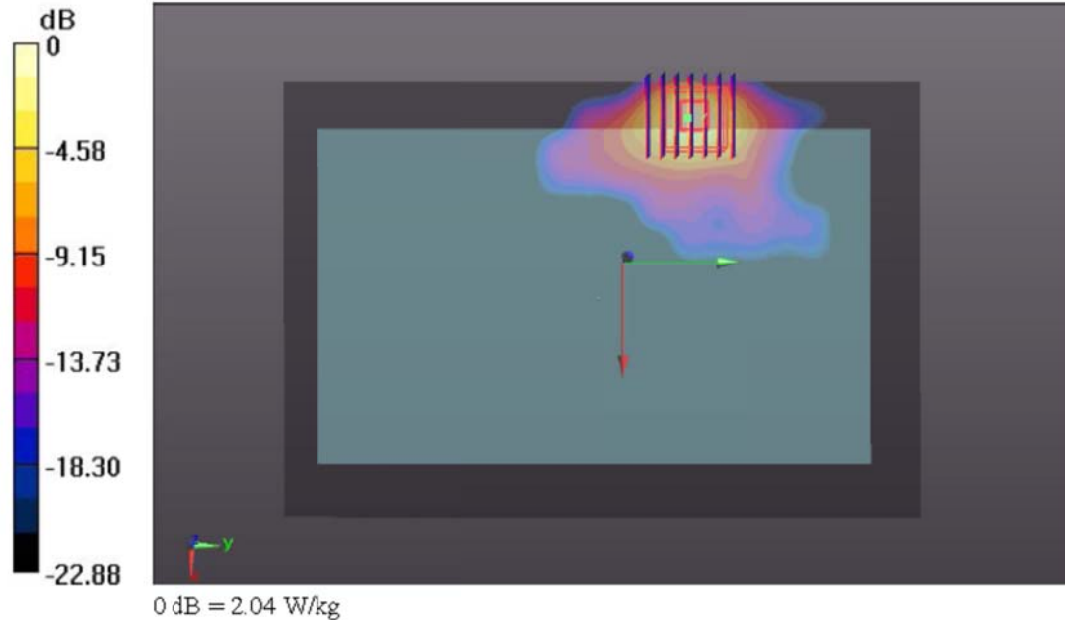

13. Simultaneous Multi-band Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body	Note
1.	GPRS/EDGE(Data) + WLAN 2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN 2.4GHz(data)	Yes	2.4GHz Hotspot
3.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Bluetooth Tethering
4.	WCDMA(Data) + Bluetooth(data)	Yes	Bluetooth Tethering

Note:

1. WLAN 2.4GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM/WCDMA according to the network signal condition; therefore, GSM/WCDMA cannot transmit simultaneously.
3. The Reported SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.
 - i) $(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

In this report, 50mm separation is applied to conservatively estimate SAR value for separation distance > 50mm

Max Power	Exposure Position	Bottom Face	Edge 2	Curved surface of Edge2
	Test separation	0	0	0
6 dBm	Estimated SAR (W/kg)	0.167	0.167	0.167



13.1 Tablet Body Co-location Simultaneous Transmission Analysis

<WWAN-PCB+WLAN2.4GHz-DTS>

Position	WWAN-PCB			WLAN 2.4GHz Band-DTS		WWAN + WLAN 2.4GHz Band (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR _{1g} (W/kg)	Plot No	Max. WLAN 2.4GHz Band SAR _{1g} (W/kg)			
Bottom Face	GSM850	#18	0.250	#32	1.182	1.43	-	-
	GSM1900	#10	0.327	#32	1.182	1.51	-	-
	WCDMA Band V	#25	0.312	#32	1.182	1.49	-	-
	WCDMA Band II	#01	0.620	#32	1.182	1.80	0.02	#1
Edge2	GSM850	#19	0.002	#33	0.544	0.55	-	-
	GSM1900	#11	0.017	#33	0.544	0.56	-	-
	WCDMA Band V	#26	0.065	#33	0.544	0.61	-	-
	WCDMA Band II	#02	0.043	#33	0.544	0.59	-	-
Edge3	GSM850	#20	0.142	-	-	0.14	-	-
	GSM1900	#12	0.322	-	-	0.32	-	-
	WCDMA Band V	#27	0.175	-	-	0.18	-	-
	WCDMA Band II	#03	0.743	-	-	0.74	-	-
Edge4	GSM850	#21	0.002	-	-	0.00	-	-
	GSM1900	#13	0.021	-	-	0.02	-	-
	WCDMA Band V	#28	0.025	-	-	0.03	-	-
	WCDMA Band II	#04	0.001	-	-	0.00	-	-
Curved surface of Edge2	GSM850	-	-	#36	0.753	0.75	-	-
	GSM1900	-	-	#36	0.753	0.75	-	-
	WCDMA Band V	-	-	#36	0.753	0.75	-	-
	WCDMA Band II	-	-	#36	0.753	0.75	-	-
Curved surface of Edge3	GSM850	#23	0.218	-	-	0.22	-	-
	GSM1900	#15	0.343	-	-	0.34	-	-
	WCDMA Band V	#30	0.300	-	-	0.30	-	-
	WCDMA Band II	#07	1.444	-	-	1.44	-	-




<WWAN-PCB + Bluetooth-DSS>

Position	WWAN-PCB			Bluetooth-DSS	WWAN + Bluetooth (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR _{1g} (W/kg)	Estimated Bluetooth SAR (W/kg)			
Bottom Face	GSM850	#18	0.250	0.167	0.42	-	-
	GSM1900	#10	0.327	0.167	0.49	-	-
	WCDMA Band V	#25	0.312	0.167	0.48	-	-
	WCDMA Band II	#01	0.620	0.167	0.79	-	-
Edge2	GSM850	#19	0.002	0.167	0.17	-	-
	GSM1900	#11	0.017	0.167	0.18	-	-
	WCDMA Band V	#26	0.065	0.167	0.23	-	-
	WCDMA Band II	#02	0.043	0.167	0.21	-	-
Edge3	GSM850	#20	0.142	-	0.14	-	-
	GSM1900	#12	0.322	-	0.32	-	-
	WCDMA Band V	#27	0.175	-	0.18	-	-
	WCDMA Band II	#03	0.743	-	0.74	-	-
Edge4	GSM850	#21	0.002	-	0.002	-	-
	GSM1900	#13	0.021	-	0.02	-	-
	WCDMA Band V	#28	0.025	-	0.03	-	-
	WCDMA Band II	#04	0.001	-	0.001	-	-
Curved surface of Edge2	GSM850	-	-	0.167	0.17	-	-
	GSM1900	-	-	0.167	0.17	-	-
	WCDMA Band V	-	-	0.167	0.17	-	-
	WCDMA Band II	-	-	0.167	0.17	-	-
Curved surface of Edge3	GSM850	#23	0.218	-	0.22	-	-
	GSM1900	#15	0.343	-	0.34	-	-
	WCDMA Band V	#30	0.300	-	0.30	-	-
	WCDMA Band II	#07	1.444	-	1.44	-	-

13.2 Simultaneous analysis - SPLSR calculation

Plot No	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (cm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
					X	Y	Z				
#01	WCDMA Band II	Bottom Face	0.620	0	0.0325	-0.087	-0.18	157.4	1.80	0.02	Not Required
#32	WLAN 2.4GHz	Bottom Face	1.182	0	-0.0616	0.0392	-0.179				

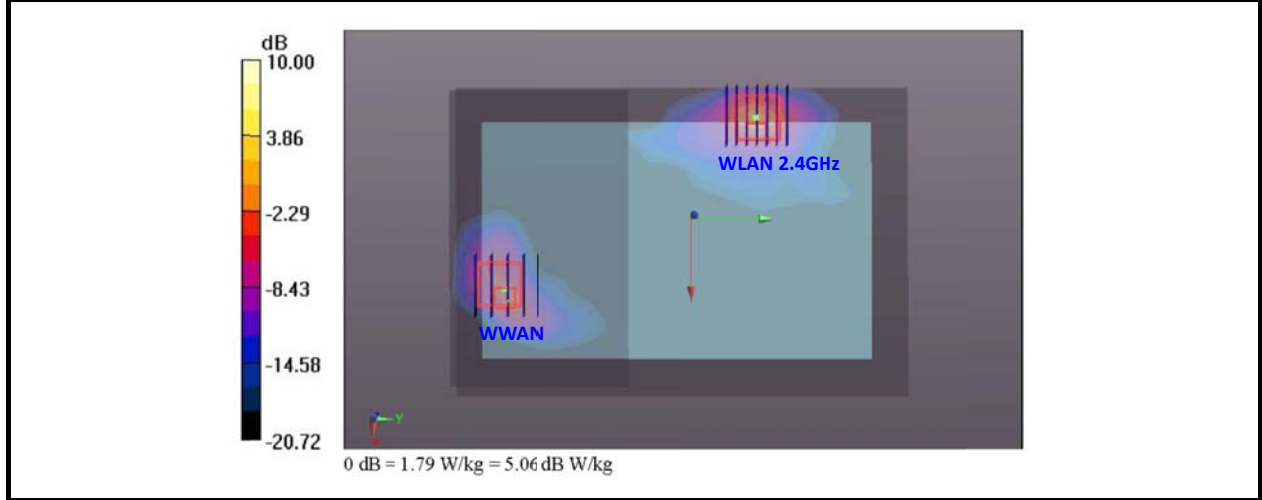

Remark:

1. Per KDB 447498 D01v05, SAR test exclusion is determined by the SAR to peak location separation ratio, SPLSR.
2. If $SPLSR \leq 0.04$, simultaneously transmission SAR is not necessary.

Test Engineer : Krin Wu

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 14.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value (±%)	Distribution		(1g)	(10g)	Uncertainty (1g)	Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 14.2 Uncertainty Budget for frequency range 300 MHz to 3 GHz



15. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v05, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, October 2012
- [8] FCC KDB 616217 D04 v01, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, October 2012
- [9] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [10] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [11] FCC KDB 865664 D01 v01, “SAR Measurement Requirements for 100MHz to 6GHz”, October 2012



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Body_835MHz_130608

DUT: D835V2 - SN: 4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.968 \text{ mho/m}$; $\epsilon_r = 57.458$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.54 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.216 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.453 mW/g

SAR(1 g) = 2.35 mW/g ; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.52 W/kg

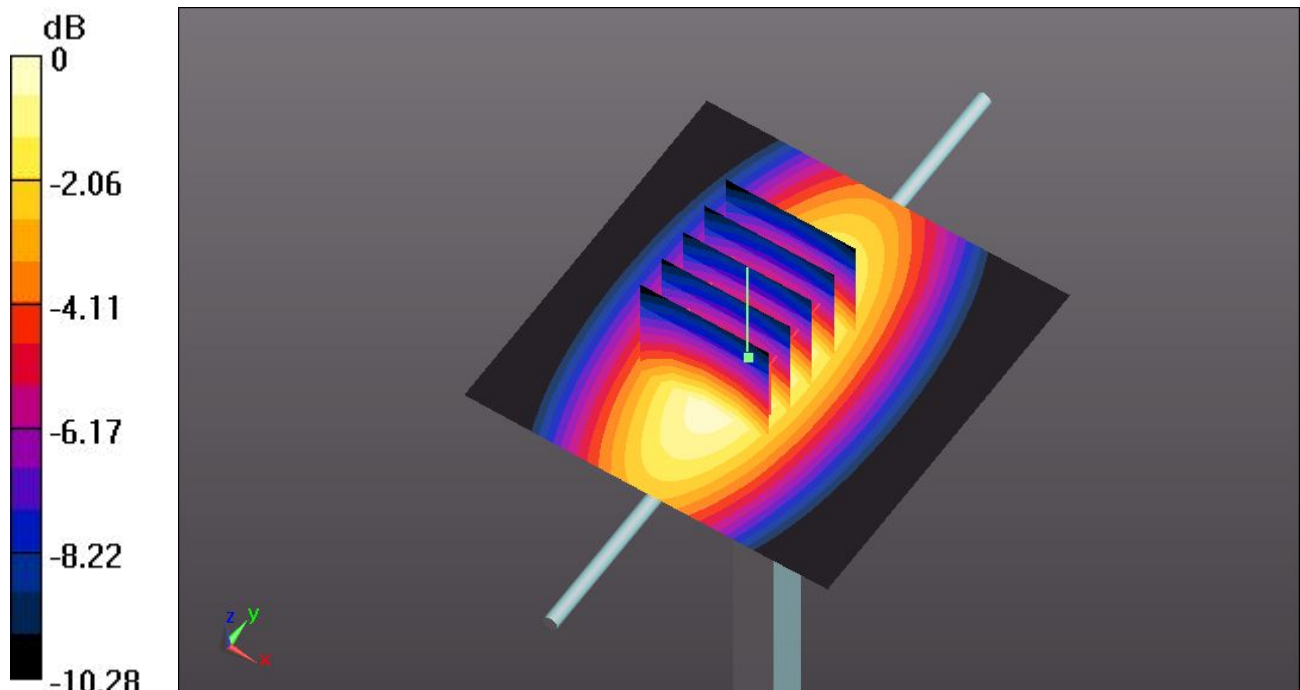

0 dB = 2.52 W/kg

System Check_Body_1900MHz_130608

DUT: D1800V2 - SN: 5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.528 \text{ mho/m}$; $\epsilon_r =$

54.867 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 14.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 85.872 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.438 mW/g

SAR(1 g) = 10.2 mW/g ; SAR(10 g) = 5.27 mW/g

Maximum value of SAR (measured) = 14.6 W/kg

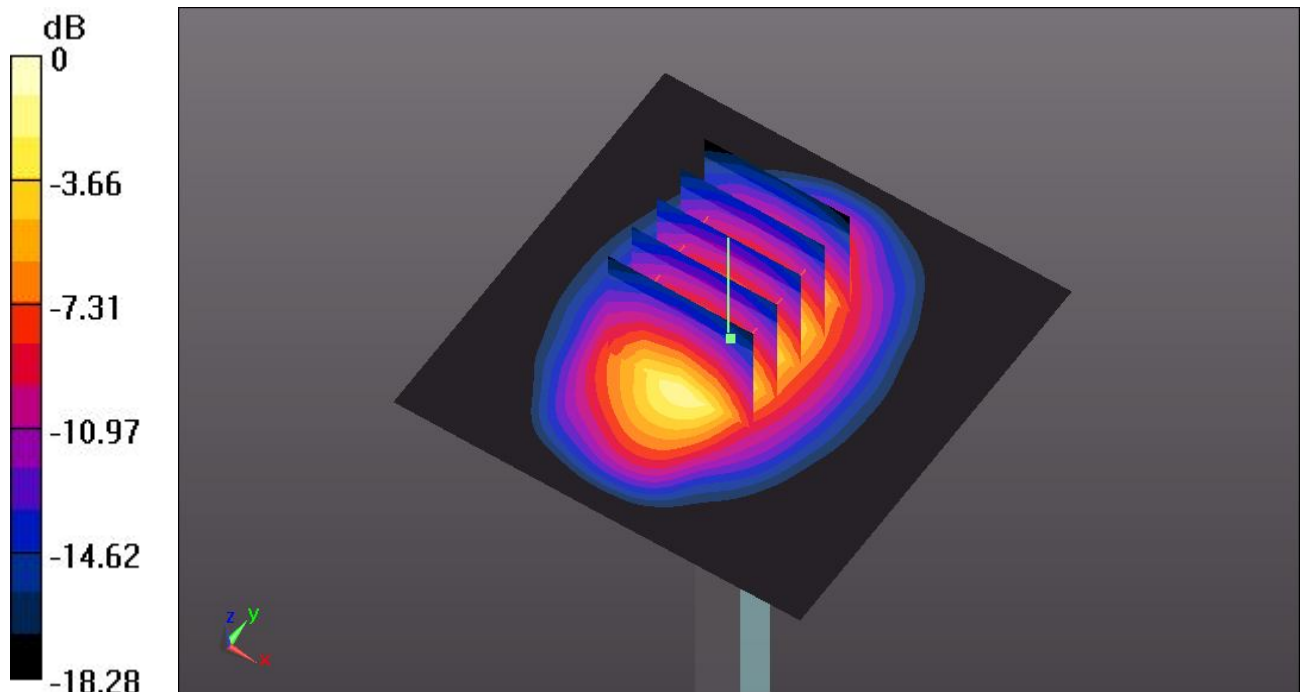

0 dB = 14.6 W/kg

System Check_Body_2450MHz_130609

DUT: D2450V2 - SN: 736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.976 \text{ mho/m}$; $\epsilon_r = 54.13$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 21.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 88.812 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.025 mW/g

SAR(1 g) = 13.8 mW/g ; SAR(10 g) = 6.34 mW/g

Maximum value of SAR (measured) = 21.3 W/kg

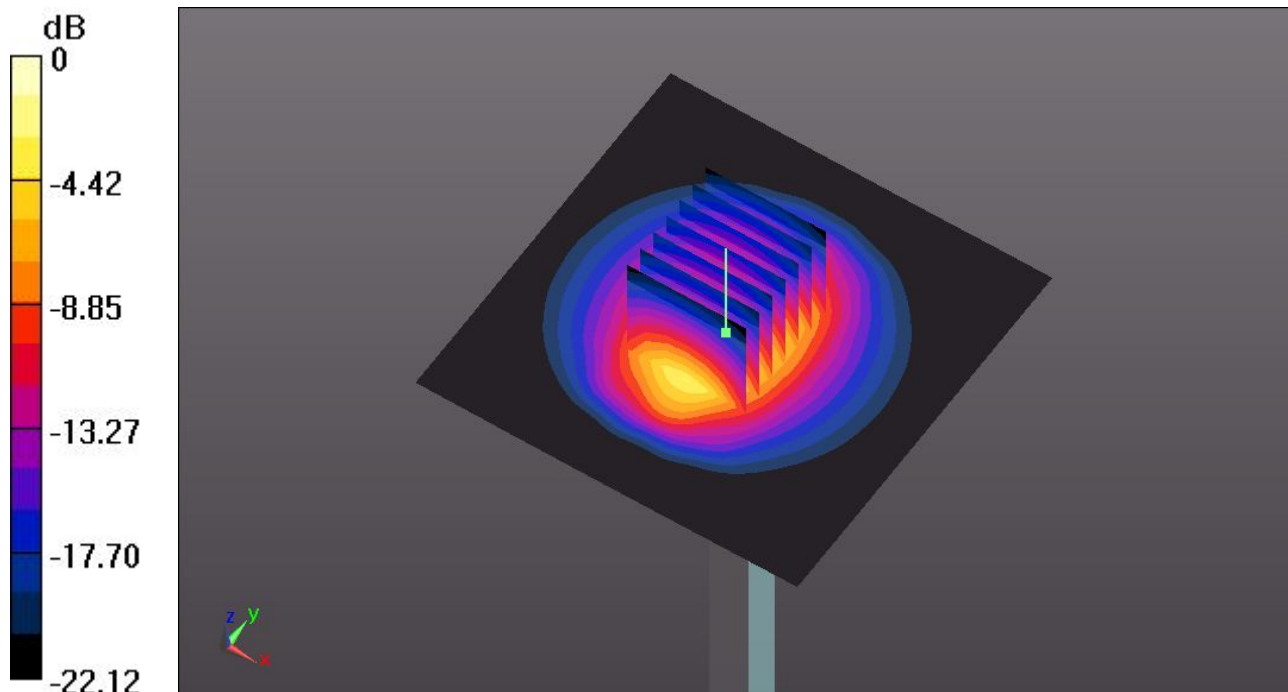

0 dB = 21.3 W/kg



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

18 GSM 850_GPRS(1 Tx slot)_Bottom Face_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (91x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.346 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.366 mW/g

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.291 W/kg

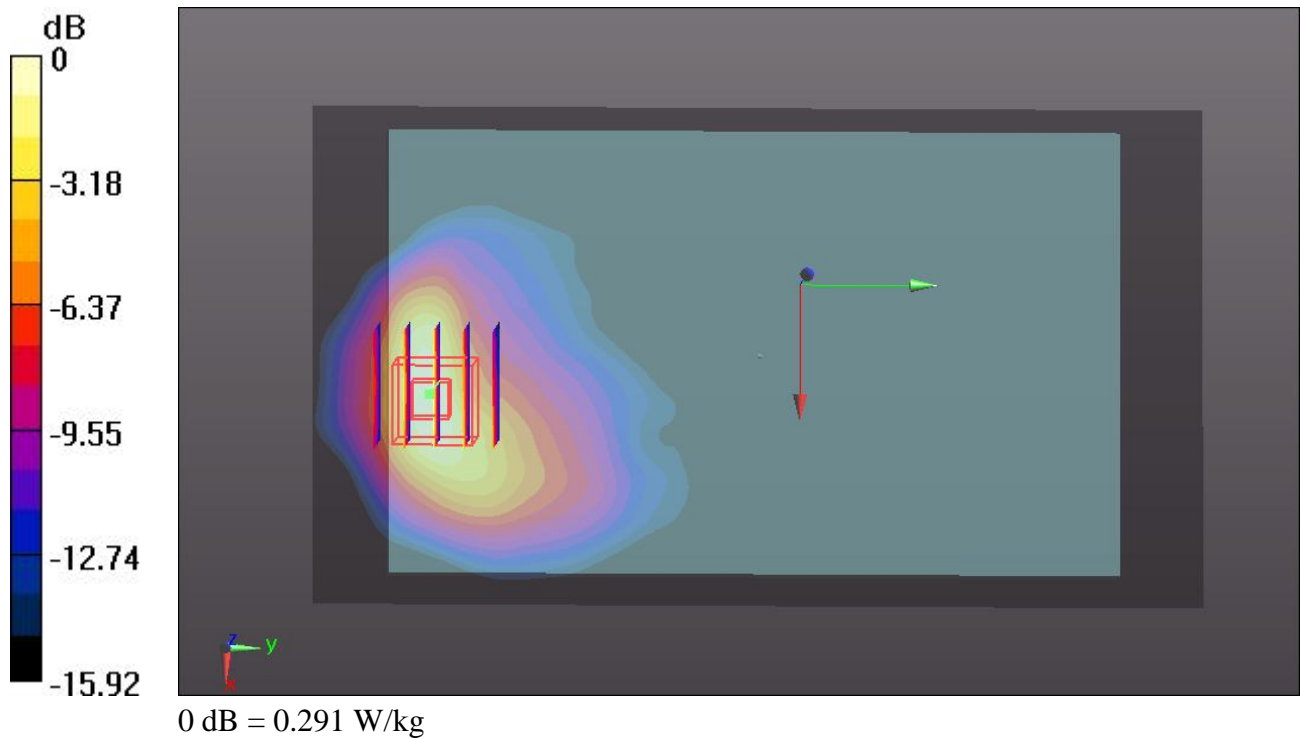

31 GSM 850_GPRS(1 Tx slot)_Edge1_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (51x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00511 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.328 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.00825 mW/g

SAR(1 g) = 0.00348 mW/g; SAR(10 g) = 0.00214 mW/g

Maximum value of SAR (measured) = 0.00577 W/kg

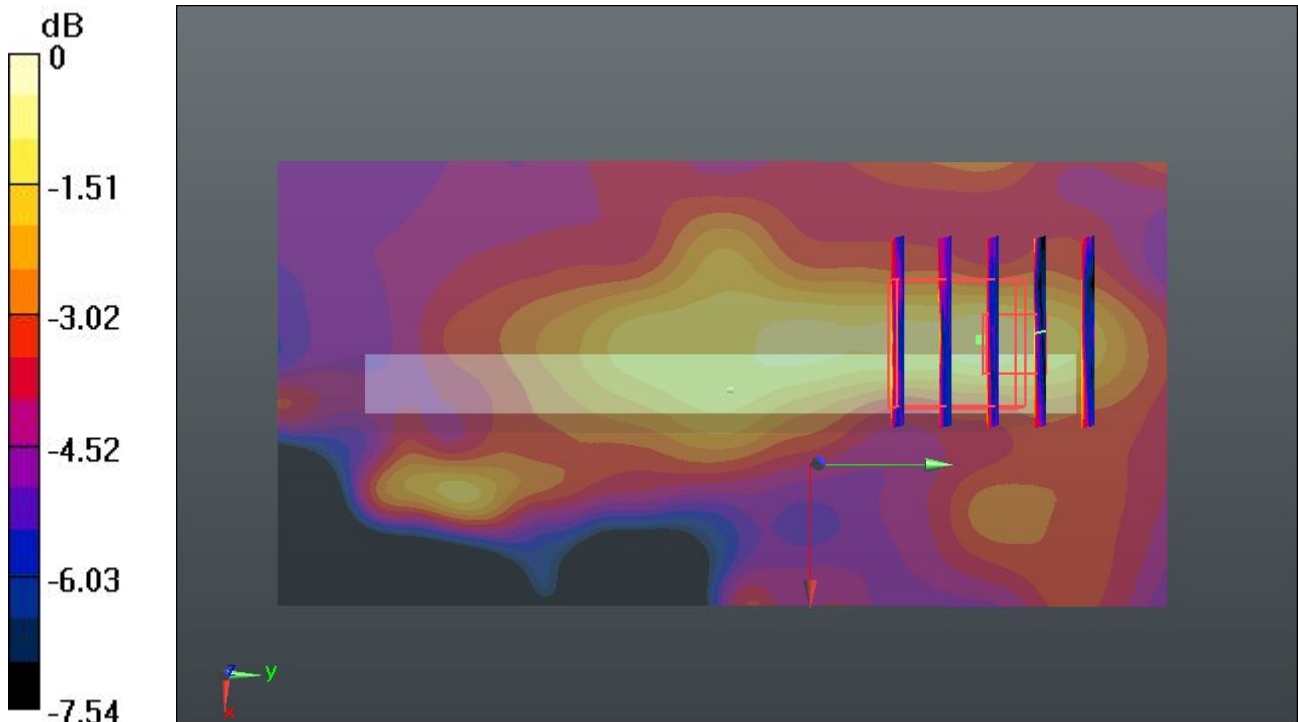

0 dB = 0.00577 W/kg

19 GSM 850_GPRS(1 Tx slot)_Edge2_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (51x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00614 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.252 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.00499 mW/g

SAR(1 g) = 0.00136 mW/g; SAR(10 g) = 0.000435 mW/g

Maximum value of SAR (measured) = 0.00282 W/kg

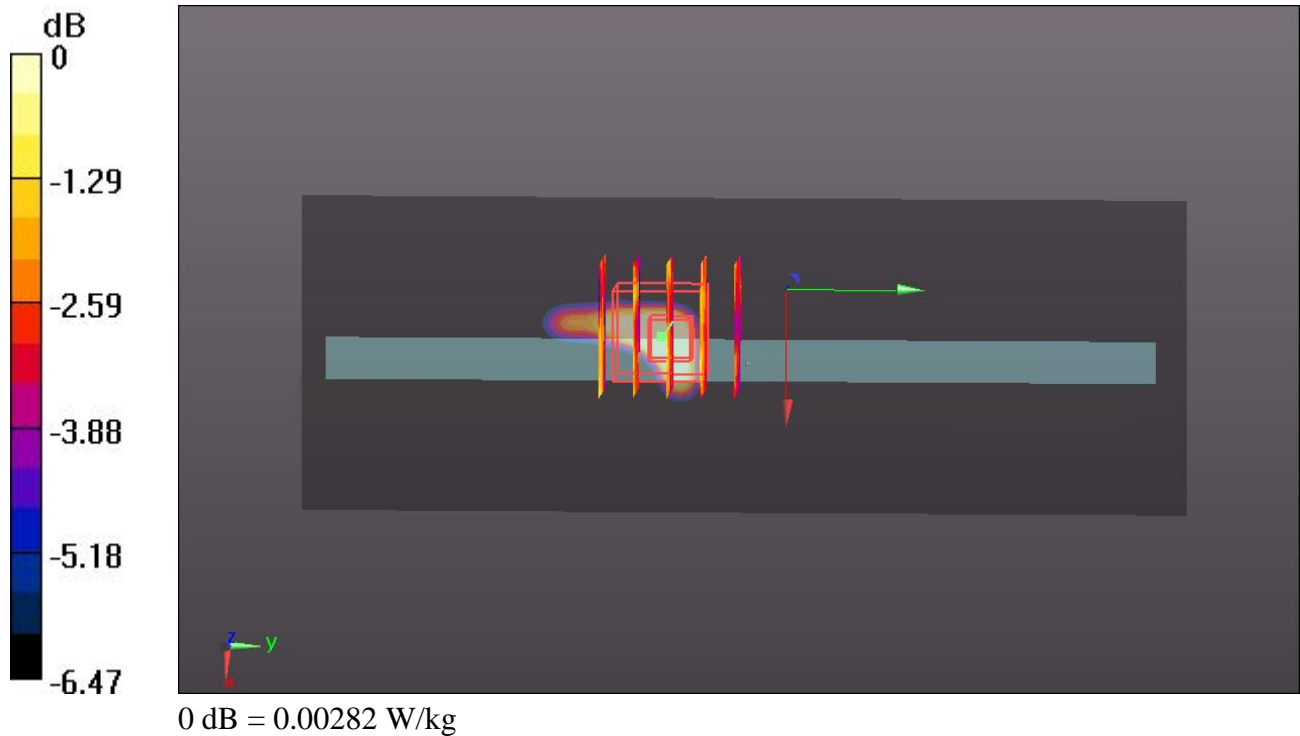

20 GSM 850_GPRS(1 Tx slot)_Edge3_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 57.335$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (51x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.151 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.414 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.205 mW/g

SAR(1 g) = 0.109 mW/g ; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.148 W/kg

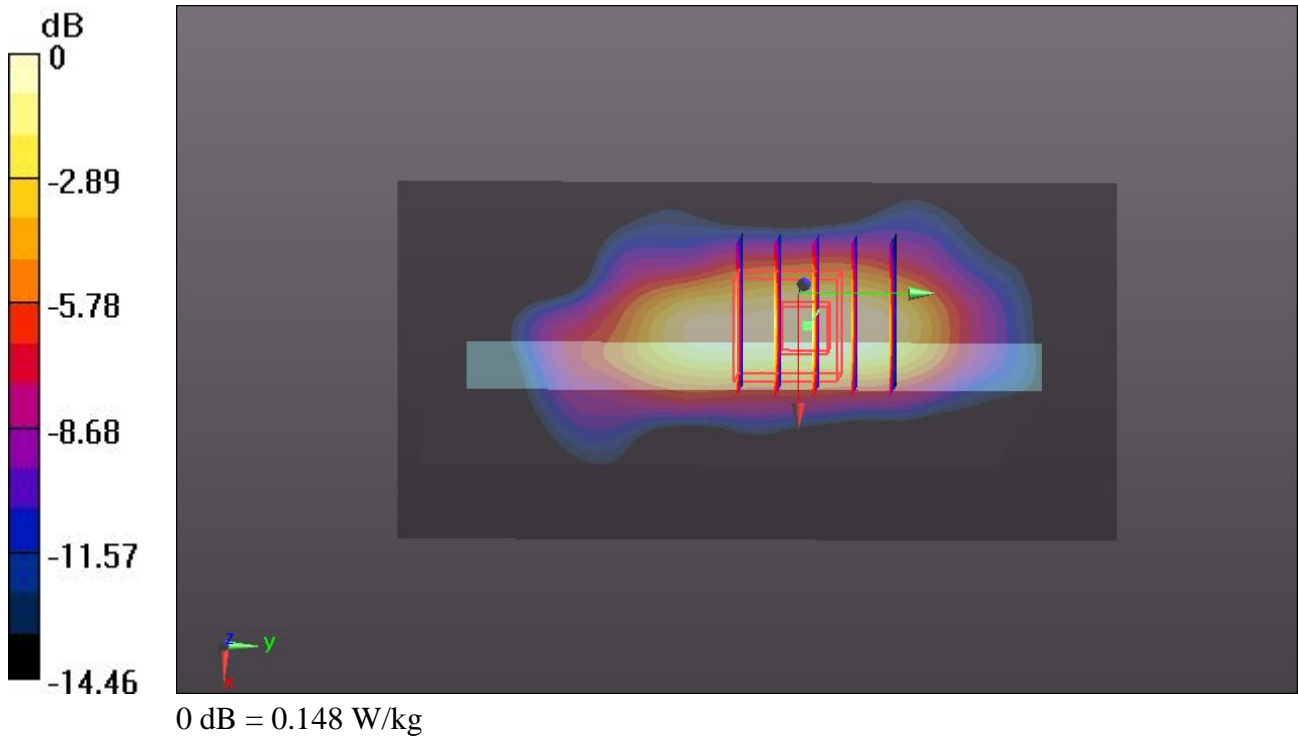

21 GSM 850_GPRS(1 Tx slot)_Edge4_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (51x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00549 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.030 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.00949 mW/g

SAR(1 g) = 0.00156 mW/g; SAR(10 g) = 0.000382 mW/g

Maximum value of SAR (measured) = 0.00466 W/kg

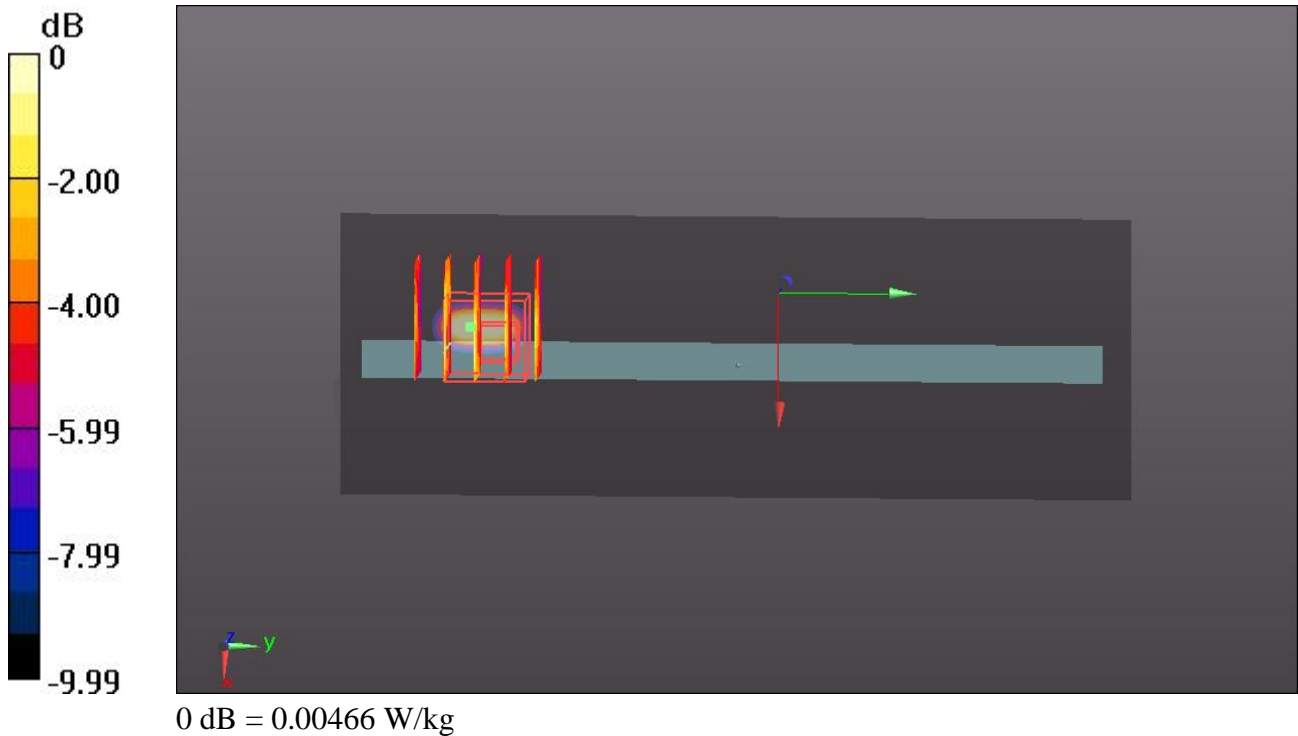

23 GSM850_GPRS(1 Tx slot)_Curve Face 3 tilted 30 Degree_0cm_Ch251

DUT: 342211-01

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130608 Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 57.335$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.183 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.708 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.355 mW/g

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.261 W/kg

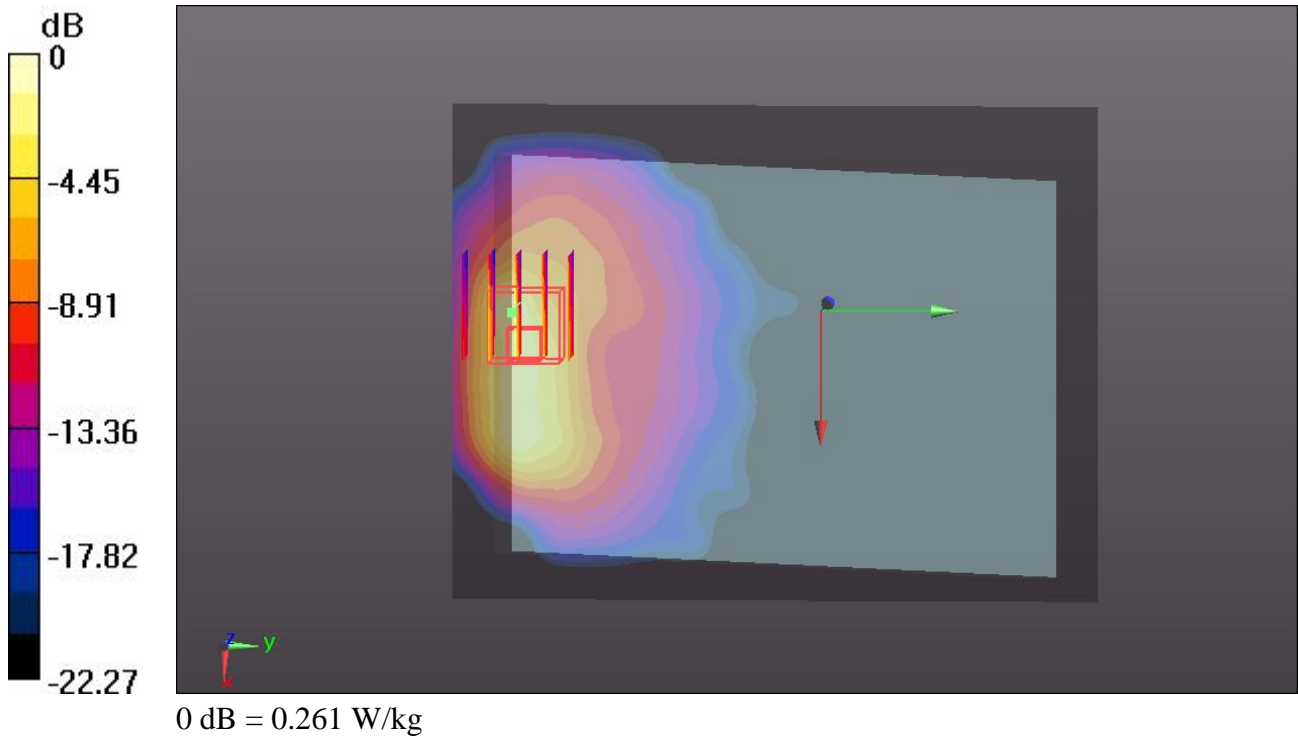

10 GSM1900_GPRS(1 Tx slot)_Bottom Face_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (91x151x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.318 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.050 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.646 mW/g

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.363 W/kg

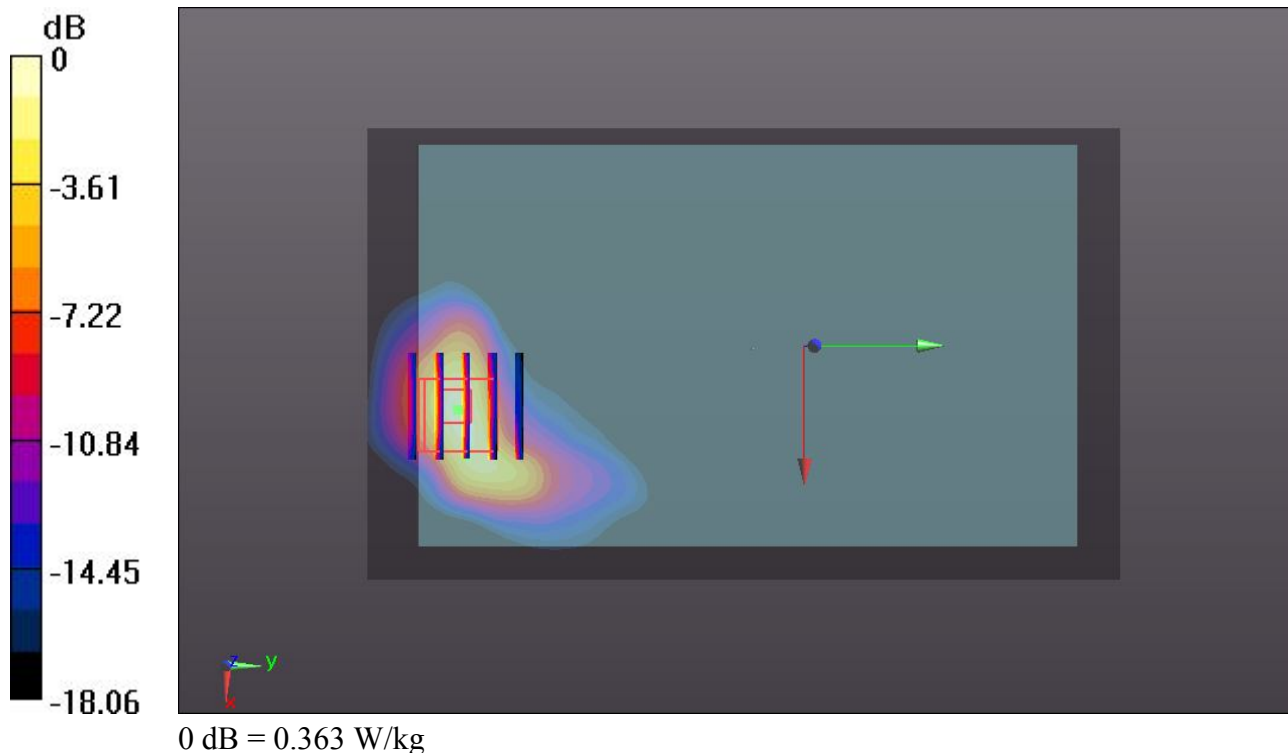

11 GSM1900_GPRS(1 Tx slot)_Edge 2_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (51x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0236 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.496 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.028 mW/g

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00402 mW/g

Maximum value of SAR (measured) = 0.0195 W/kg

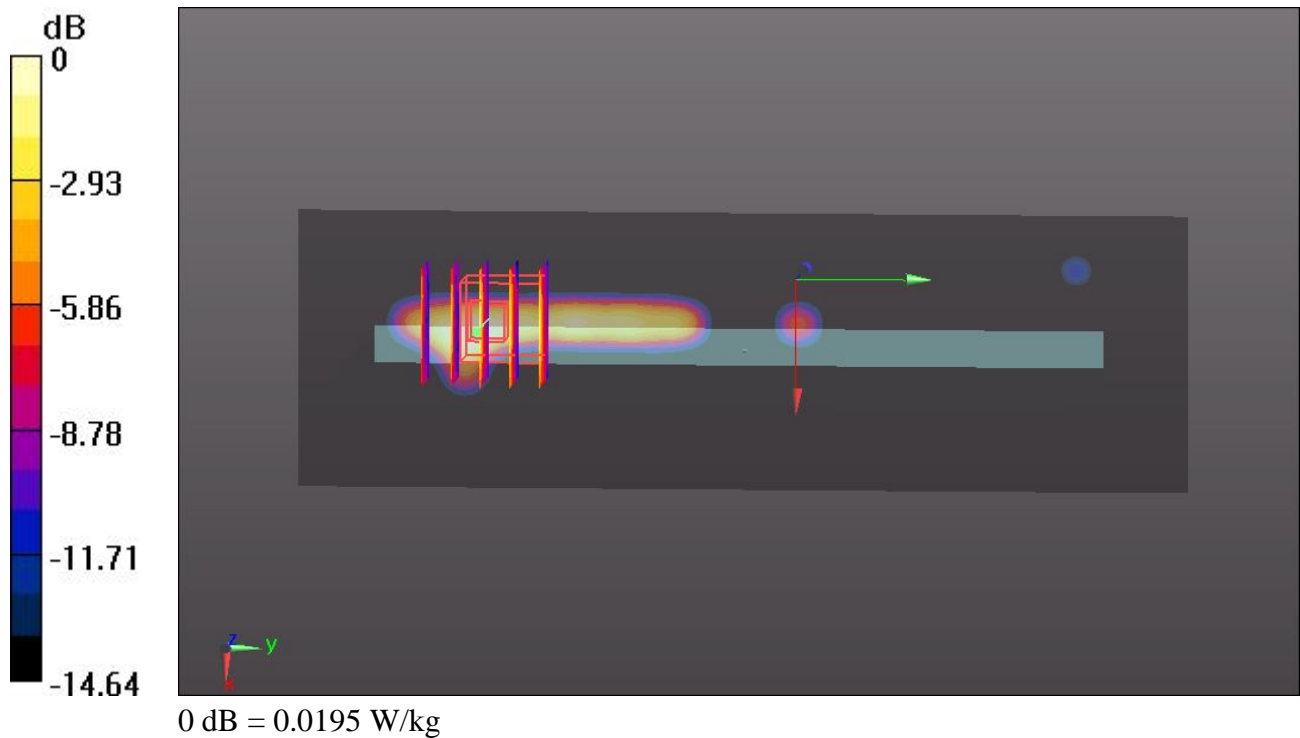

12 GSM1900_GPRS(1 Tx slot)_Edge 3_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (41x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.454 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.960 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.524 mW/g

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.375 W/kg

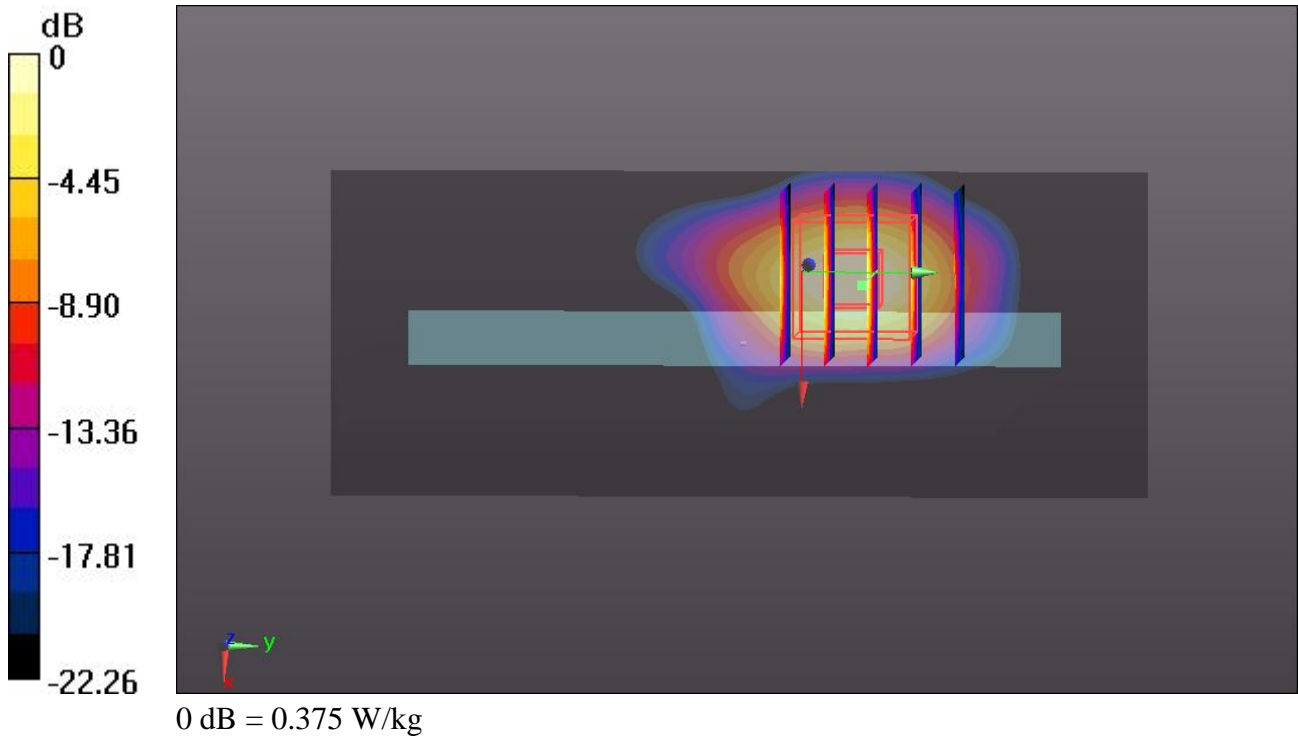

13 GSM1900_GPRS(1 Tx slot)_Edge 4_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (51x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0252 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.533 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.043 mW/g

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00629 mW/g

Maximum value of SAR (measured) = 0.0207 W/kg

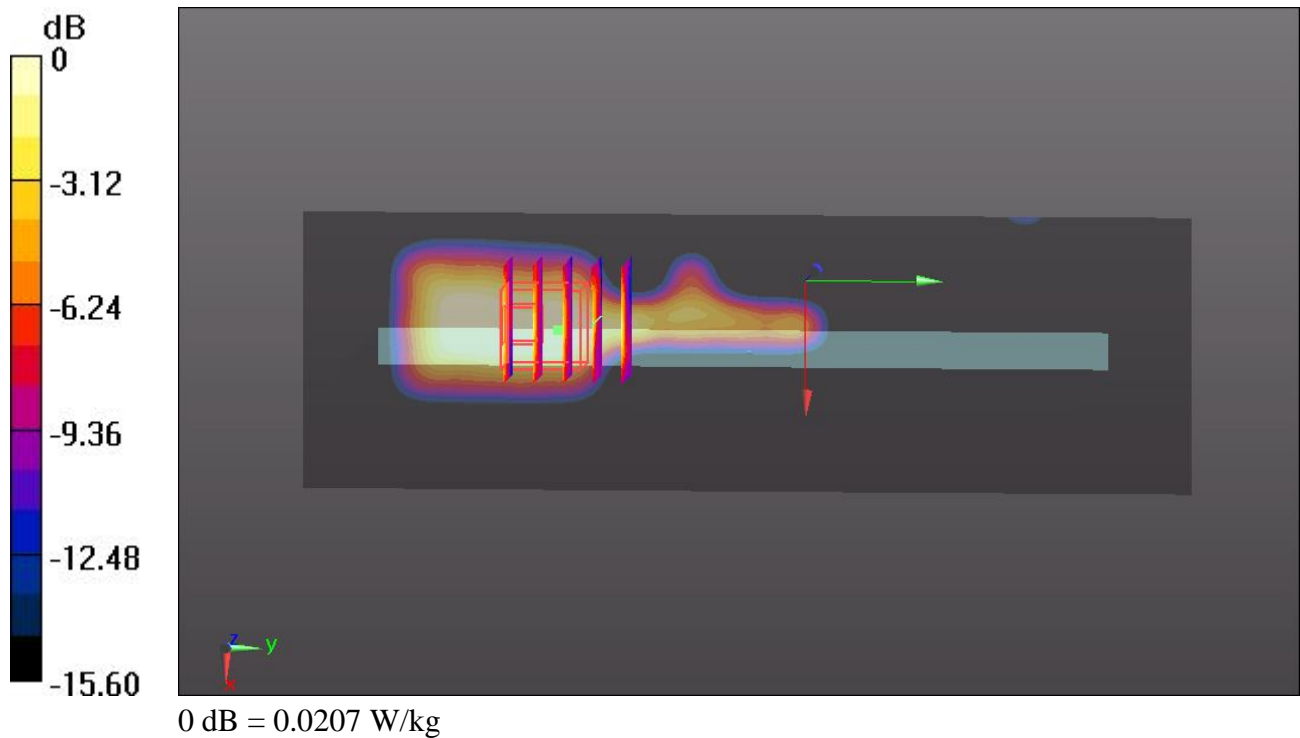

15 GSM1900_GPRS(1 Tx slot)_Curve Face 3 tilted 30 Degree_0cm_Ch810

DUT: 342211-01

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130608 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.433 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.515 mW/g

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.376 W/kg

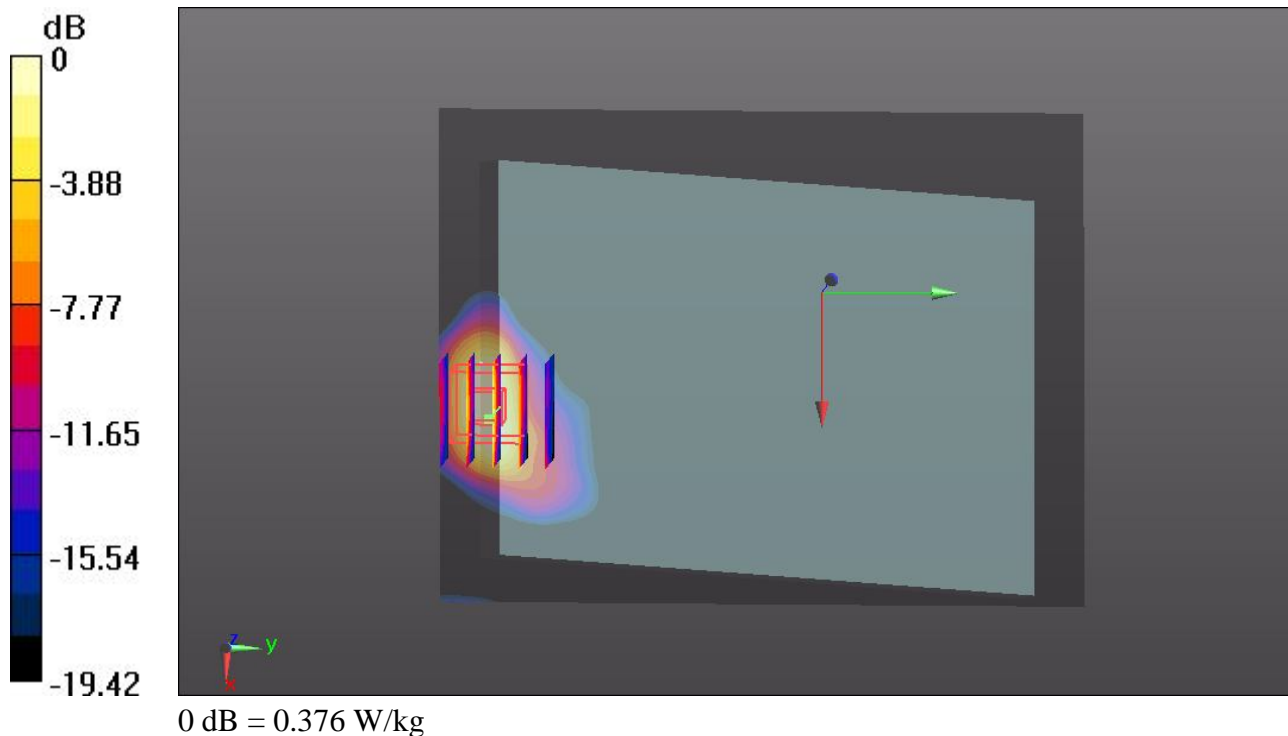

25 WCDMA V_RMC 12.2K_Bottom Face_0cm_Ch4132

DUT: 342211-01

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 57.537$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (91x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.347 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.999 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.426 mW/g

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.333 W/kg

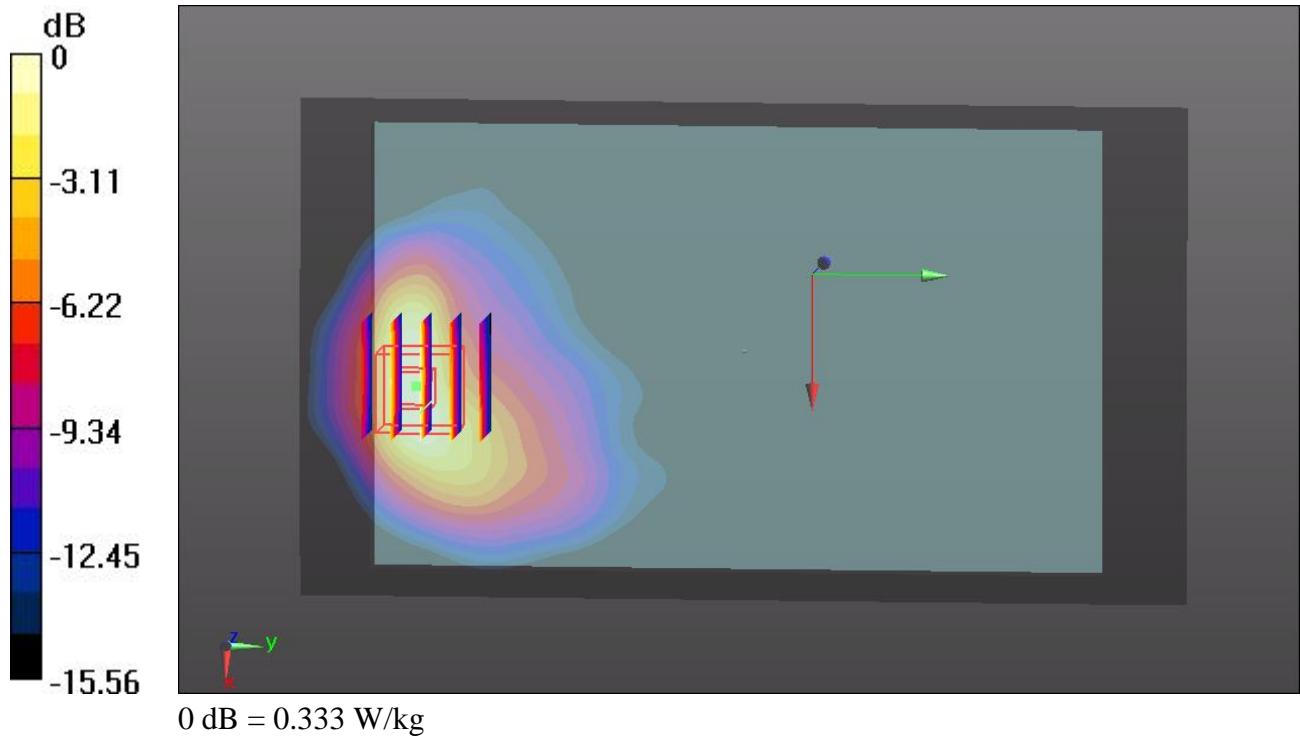

26 WCDMA V_RMC 12.2K_Edge2_0cm_Ch4132

DUT: 342211-01

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 57.537$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (51x161x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.00643 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.372 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.00729 mW/g

SAR(1 g) = 0.00472 mW/g ; SAR(10 g) = 0.00327 mW/g

Maximum value of SAR (measured) = 0.00589 W/kg

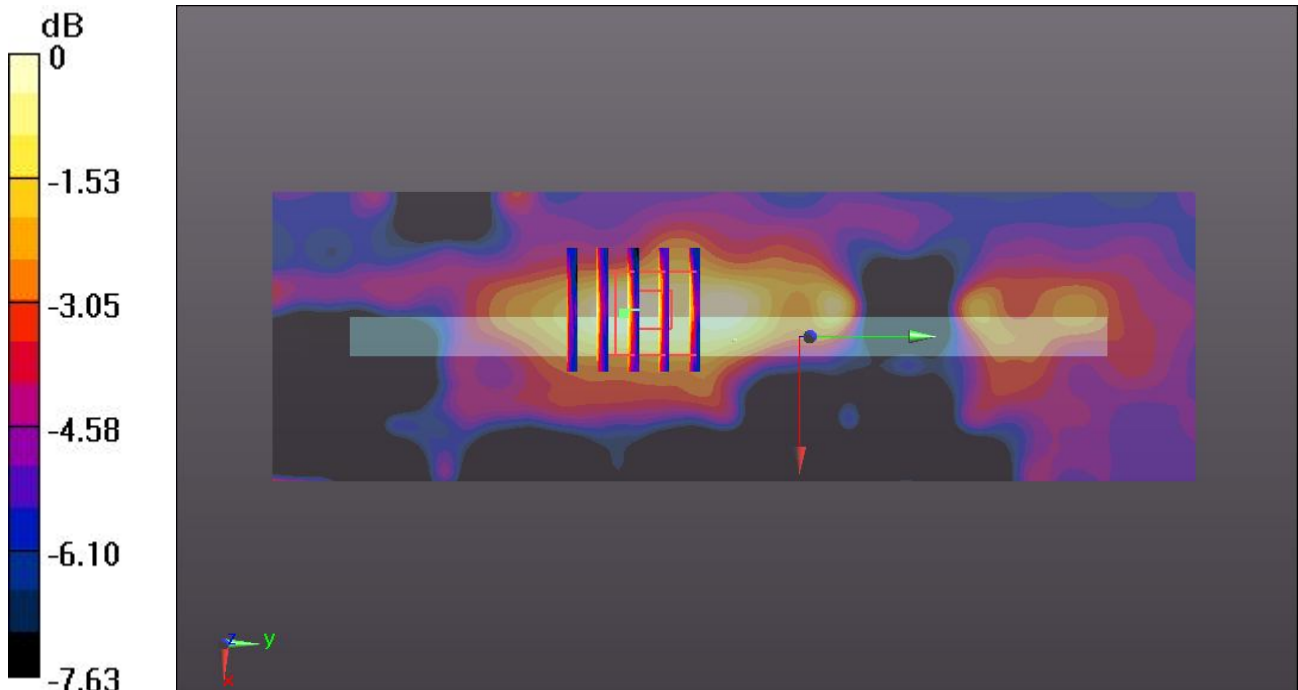

0 dB = 0.00589 W/kg

27 WCDMA V_RMC 12.2K_Edge3_0cm_Ch4132

DUT: 342211-01

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 57.537$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (51x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.173 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.689 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.217 mW/g

SAR(1 g) = 0.126 mW/g ; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.170 W/kg

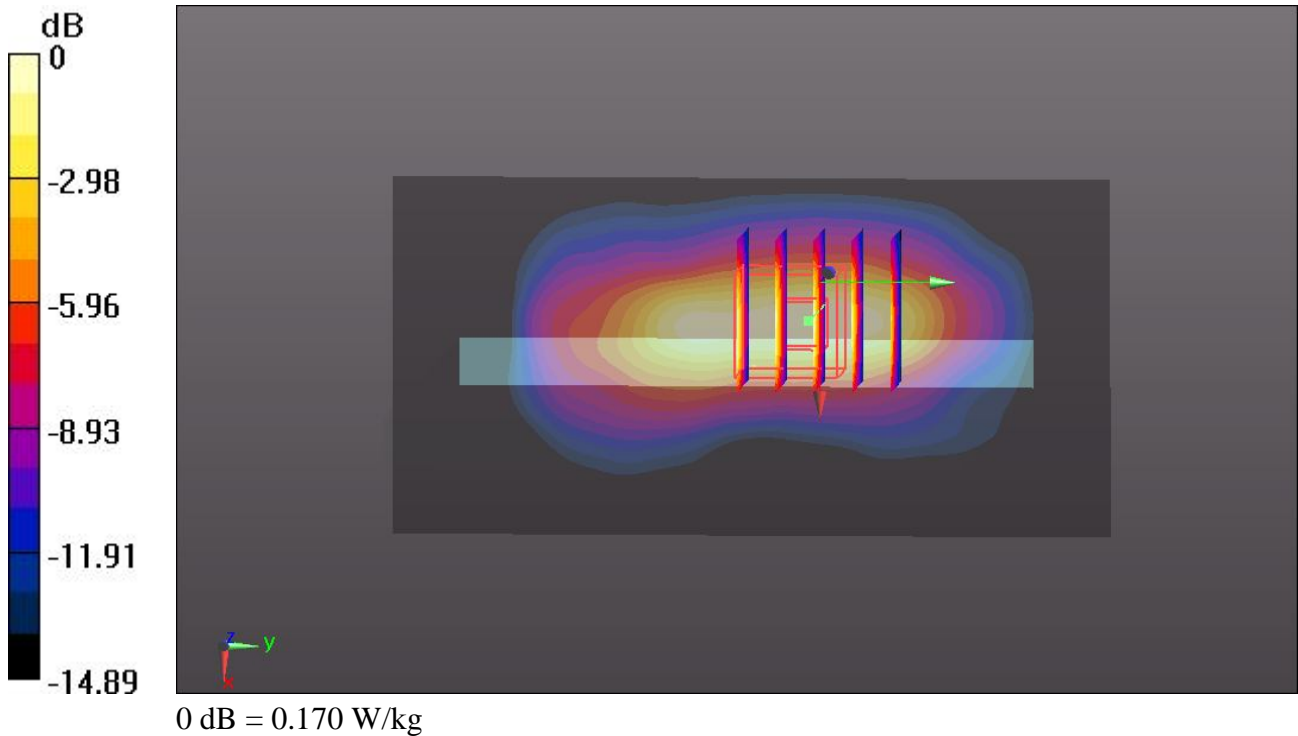

28 WCDMA V_RMC 12.2K_Edge4_0cm_Ch4132

DUT: 342211-01

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 57.537$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (51x141x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.0271 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.646 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.041 mW/g

SAR(1 g) = 0.018 mW/g ; SAR(10 g) = 0.00872 mW/g

Maximum value of SAR (measured) = 0.0274 W/kg

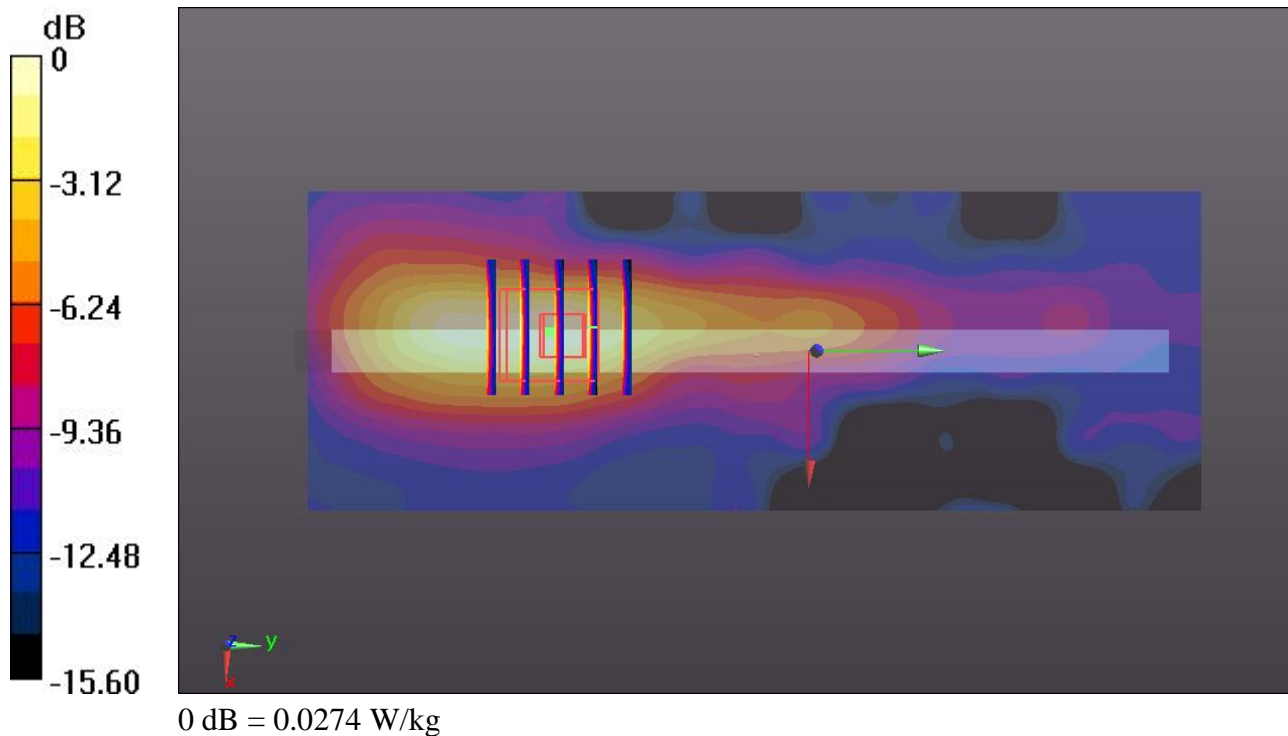

30 WCDMA V_RMC 12.2K_Curve Face 3 tilted 30 Degree_0cm_Ch4132

DUT: 342211-01

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130608 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 57.537$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4132/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.894 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.486 mW/g

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.352 W/kg

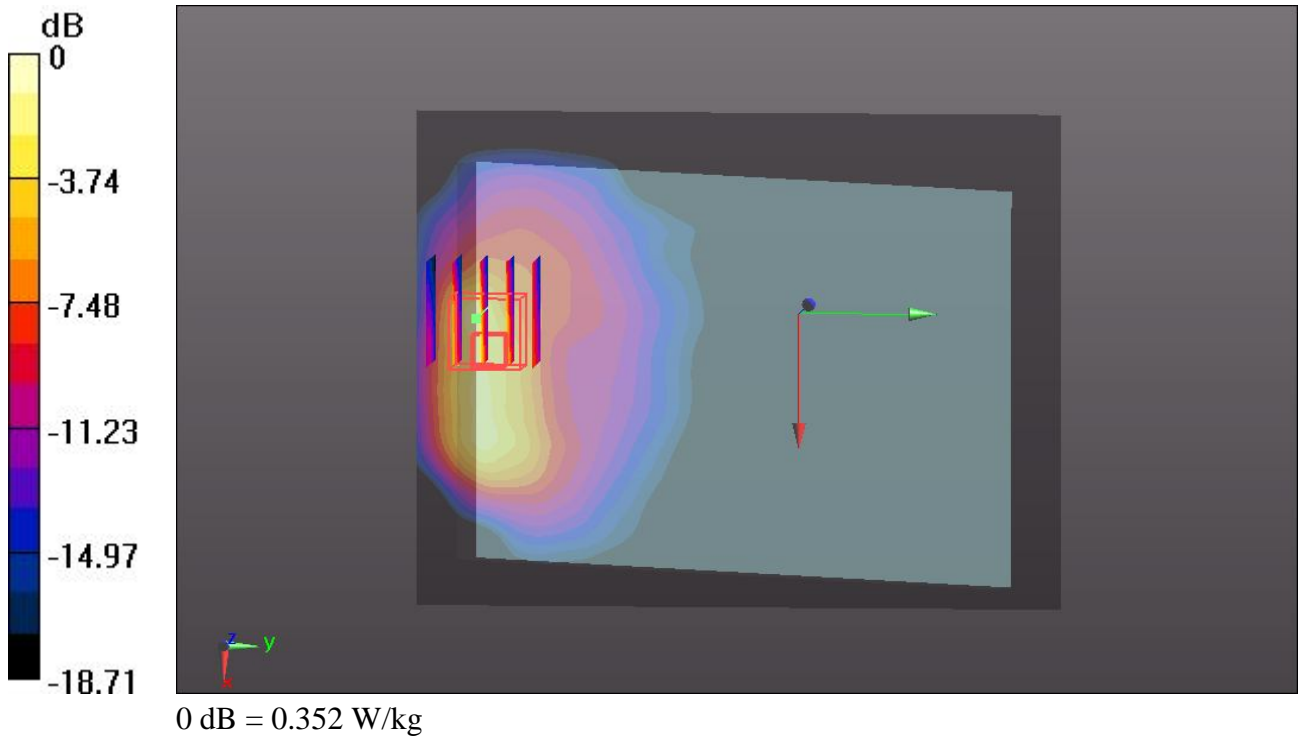

01 WCDMA II_RMC 12.2K_Bottom Face_0cm_Ch9538

DUT: 342211-01

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r =$

54.854 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (101x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.910 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.636 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.496 mW/g

SAR(1 g) = 0.565 mW/g ; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

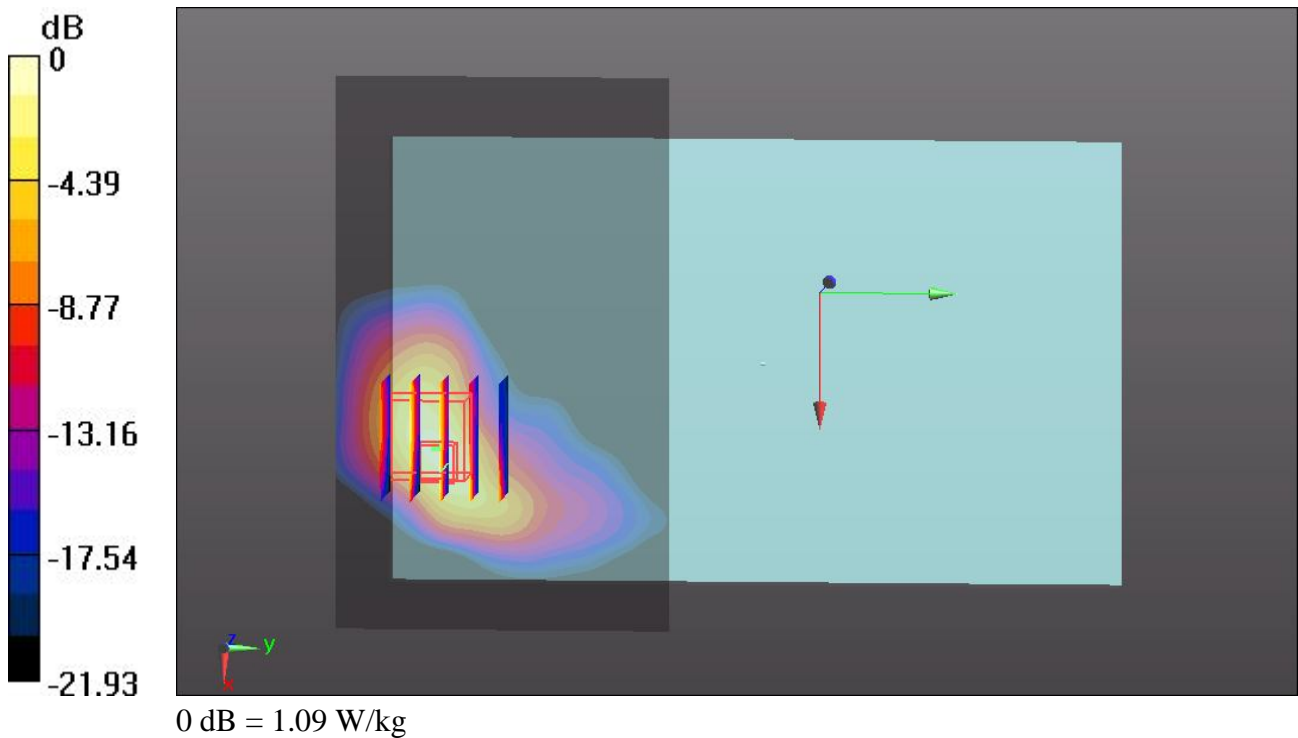

02 WCDMA II_RMC 12.2K_Edge 2_0cm_Ch9538

DUT: 342211-01

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r =$

54.854 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (51x161x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.0598 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.468 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.077 mW/g

SAR(1 g) = 0.039 mW/g ; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.0606 W/kg

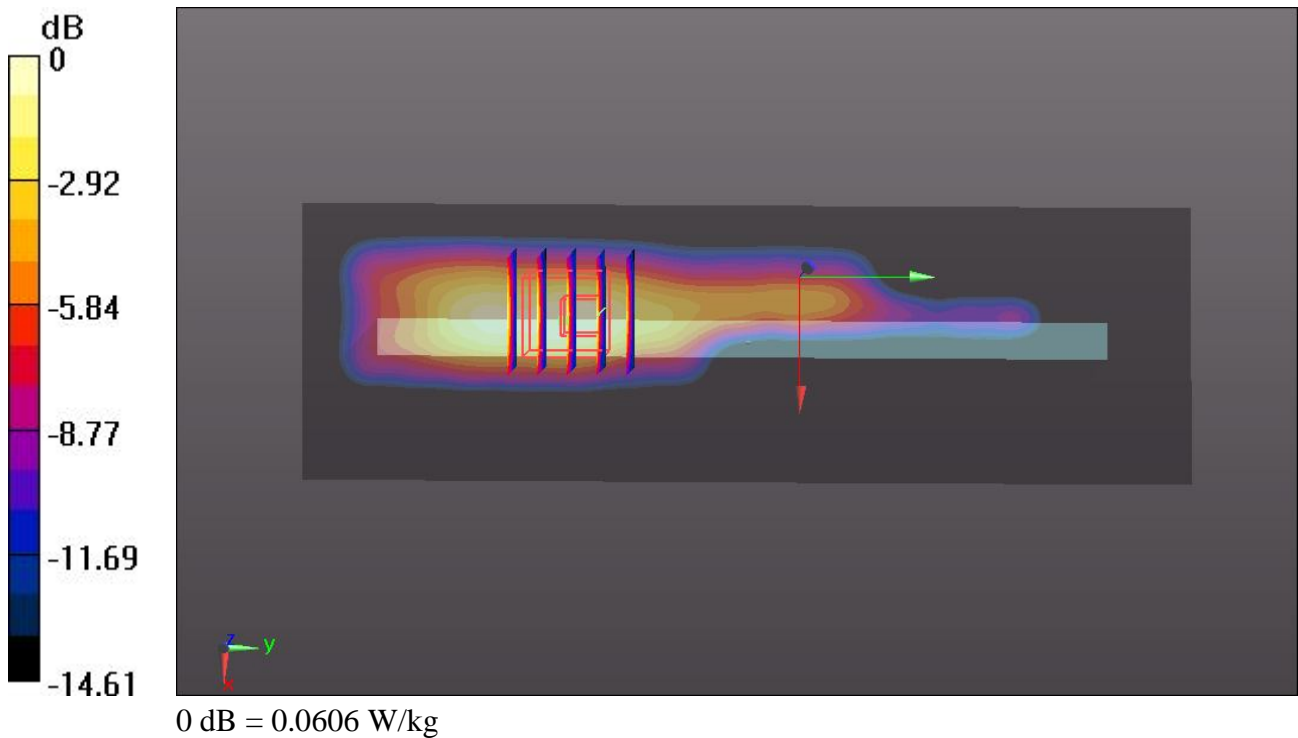

03 WCDMA II_RMC 12.2K_Edge 3_0cm_Ch9538

DUT: 342211-01

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r =$

54.854 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (51x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.04 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.350 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.533 mW/g

SAR(1 g) = 0.678 mW/g ; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 1.11 W/kg

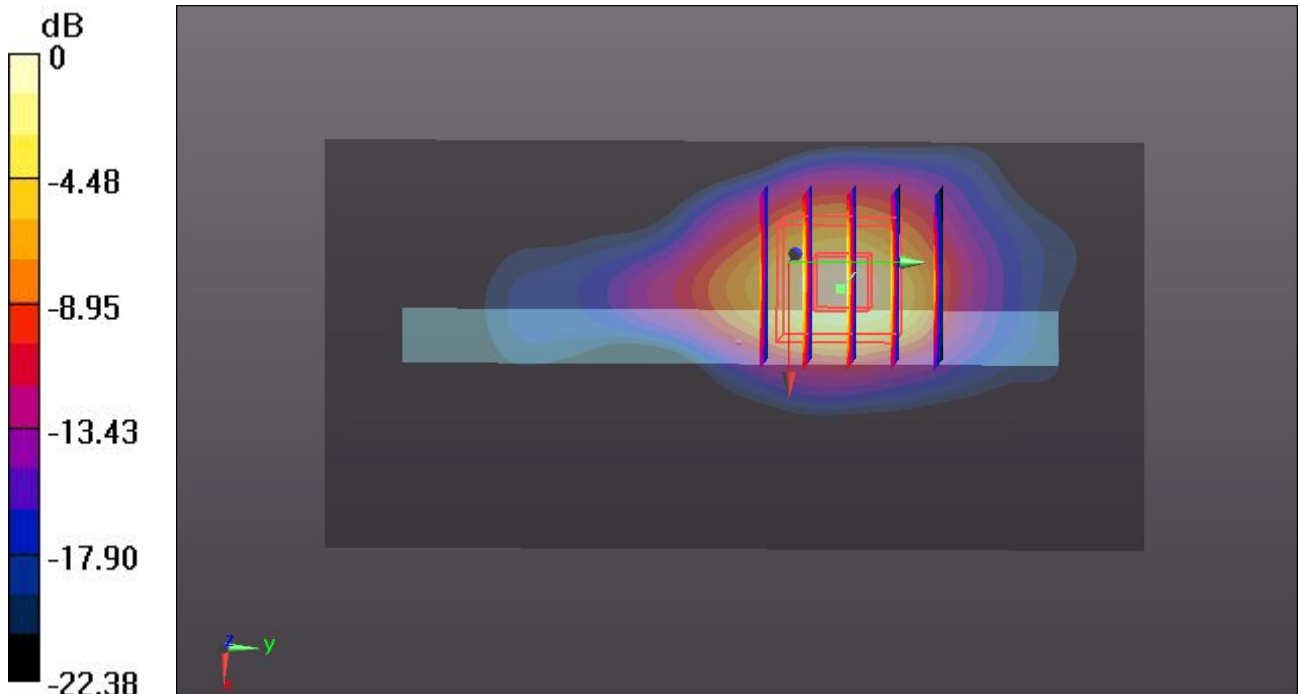

0 dB = 1.11 W/kg

04 WCDMA II_RMC 12.2K_Edge 4_0cm_Ch9538

DUT: 342211-01

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (51x161x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00422 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.234 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.00678 mW/g

SAR(1 g) = 0.00116 mW/g; SAR(10 g) = 0.000275 mW/g

Maximum value of SAR (measured) = 0.00424 W/kg

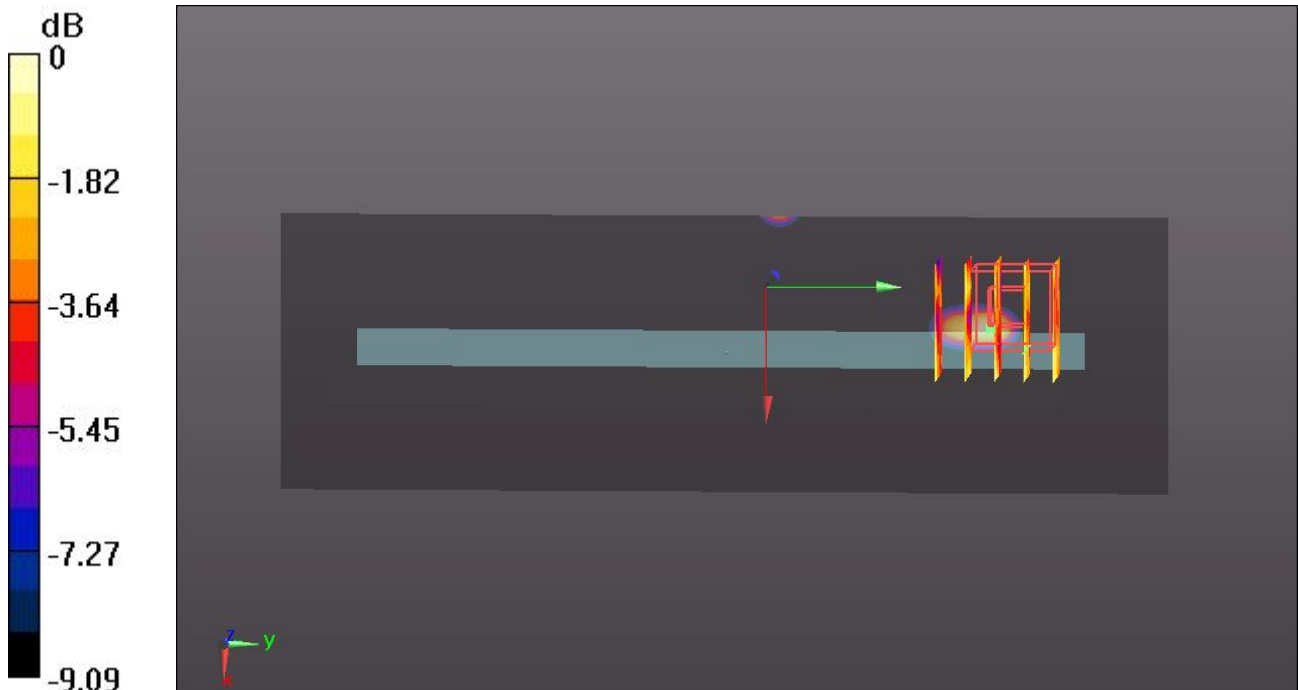

0 dB = 0.00424 W/kg

06 WCDMA II_RMC 12.2K_Curve Face 3 tilted 30 Degree_0cm_Ch9538

DUT: 342211-01

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r =$

54.854 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (101x131x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.26 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.667 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.571 mW/g

SAR(1 g) = 0.749 mW/g ; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 1.15 W/kg

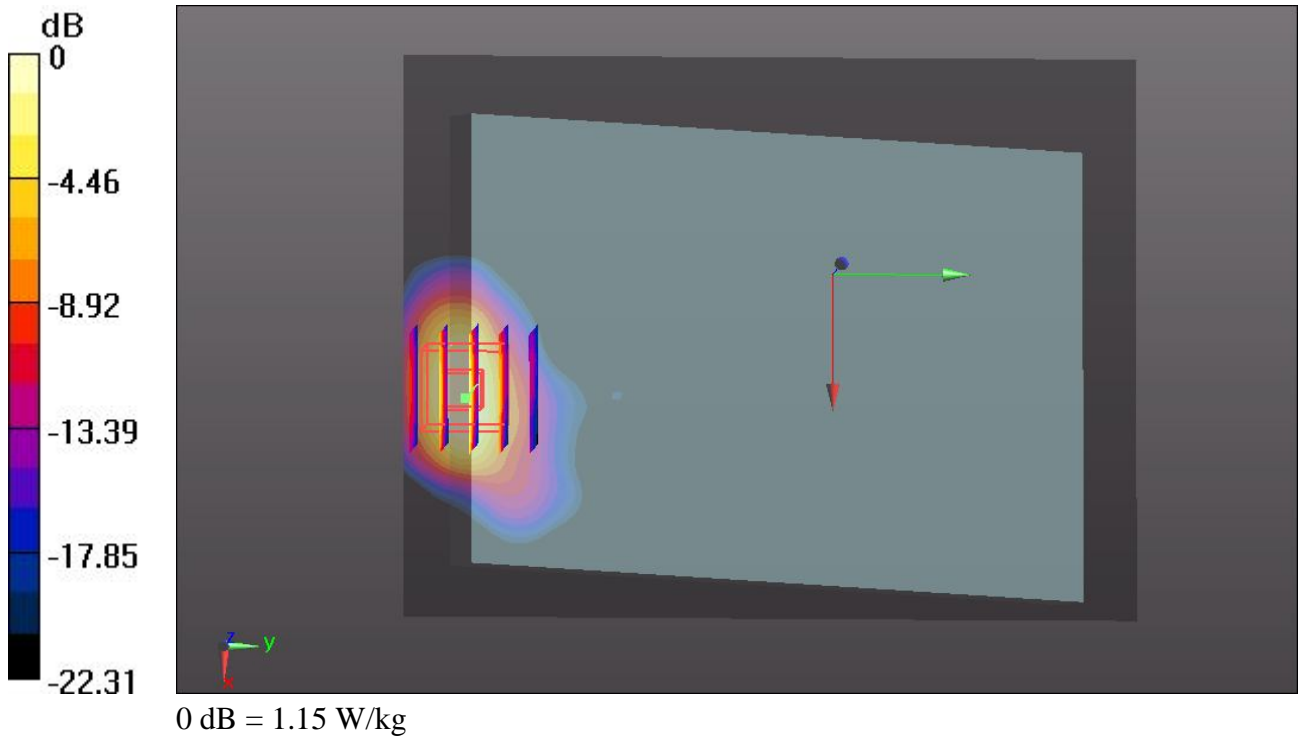

07 WCDMA II_RMC 12.2K_Curve Face 3 tilted 30 Degree_0cm_Ch9262

DUT: 342211-01

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.469 \text{ mho/m}$; $\epsilon_r =$

54.965 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (101x131x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.15 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.041 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.606 mW/g

SAR(1 g) = 1.24 mW/g ; SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 1.89 W/kg

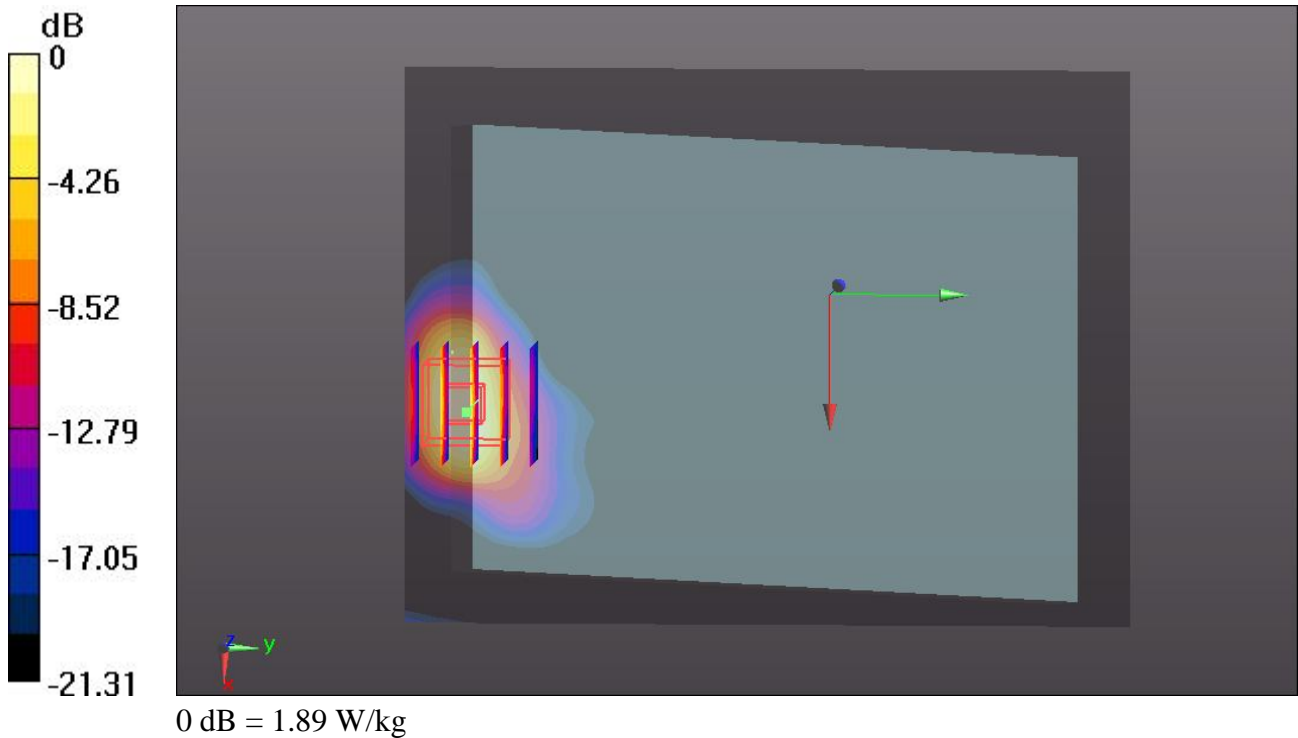

17 WCDMA II_RMC 12.2K_Curve Face 3 tilted 30 Degree_0cm_Ch9262_Repeat SAR

DUT: 342211-01

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$

54.965 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.03 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.236 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.629 mW/g

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 1.95 W/kg

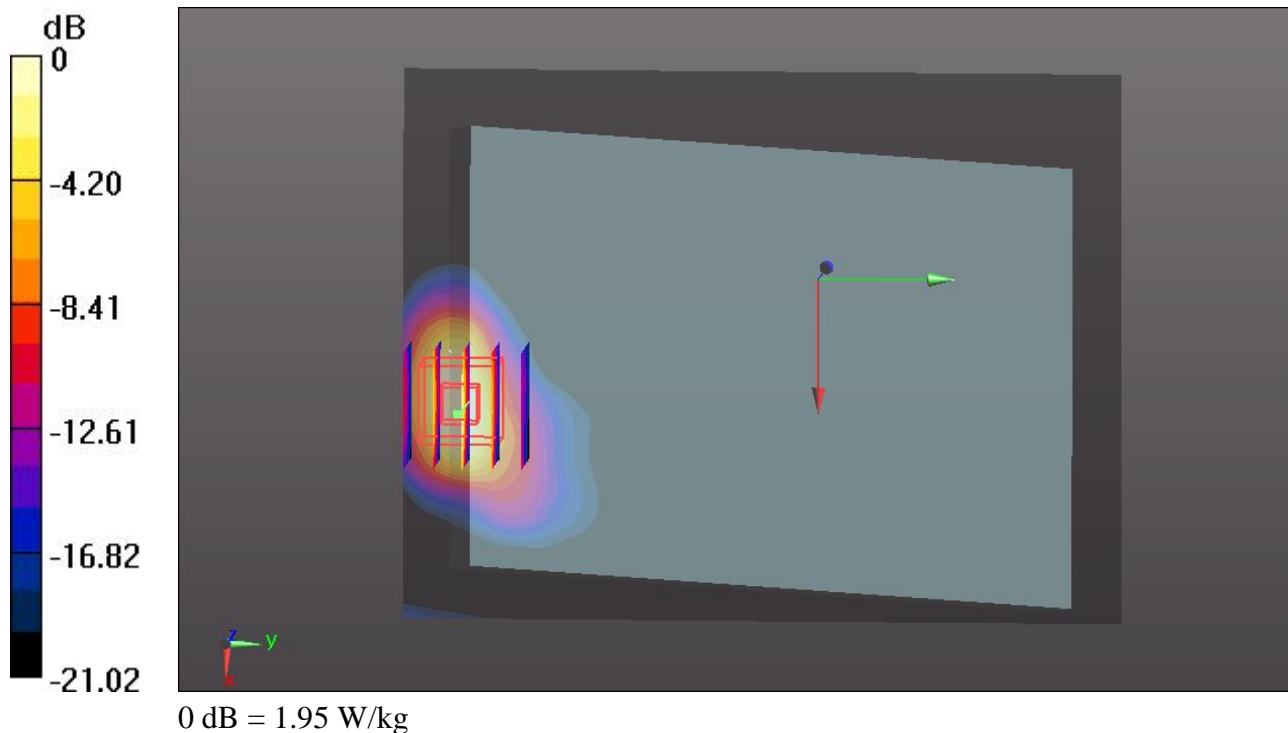

08 WCDMA II_RMC 12.2K_Curve Face 3 tilted 30 Degree_0cm_Ch9400

DUT: 342211-01

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130608 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (101x131x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.847 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.316 mW/g

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.961 W/kg

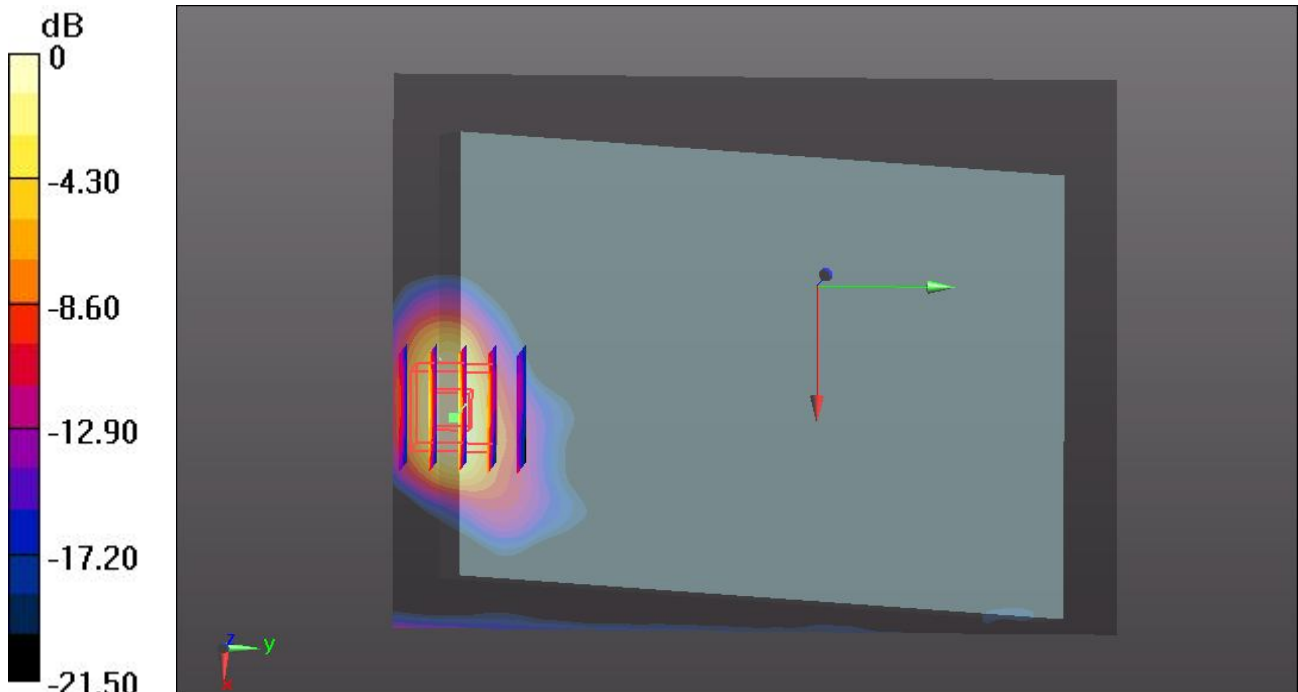

0 dB = 0.961 W/kg

32 WLAN2.4G 802.11b_Bottom Face_0cm_Ch11

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (131x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 2.13 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.843 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.391 mW/g

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 2.04 W/kg

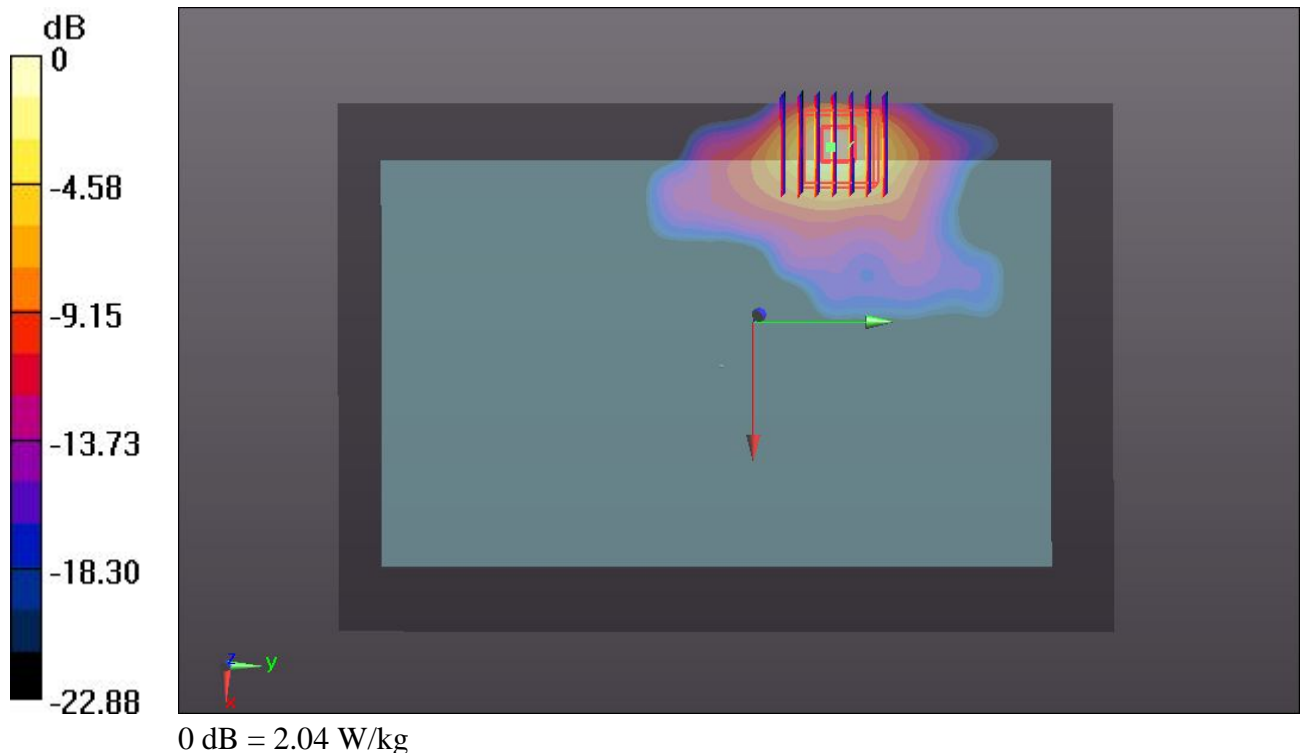

41 WLAN2.4G 802.11b_Bottom Face_0cm_Ch11_Repeat SAR

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 54.071$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (131x191x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 1.93 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.499 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.925 mW/g

SAR(1 g) = 1.12 mW/g ; SAR(10 g) = 0.395 mW/g

Maximum value of SAR (measured) = 1.79 W/kg

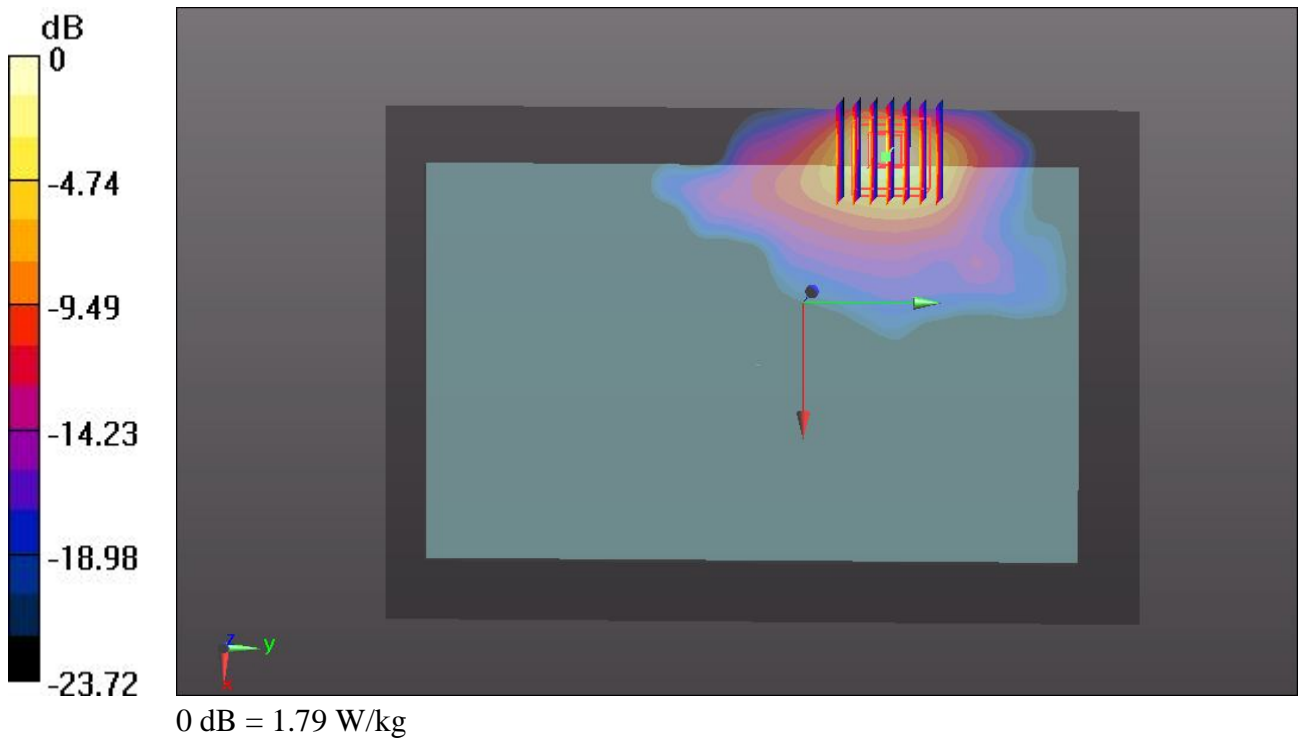

33 WLAN2.4G 802.11b_Edge 2_0cm_Ch11

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (61x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.638 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.300 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.644 mW/g

SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 1.07 W/kg

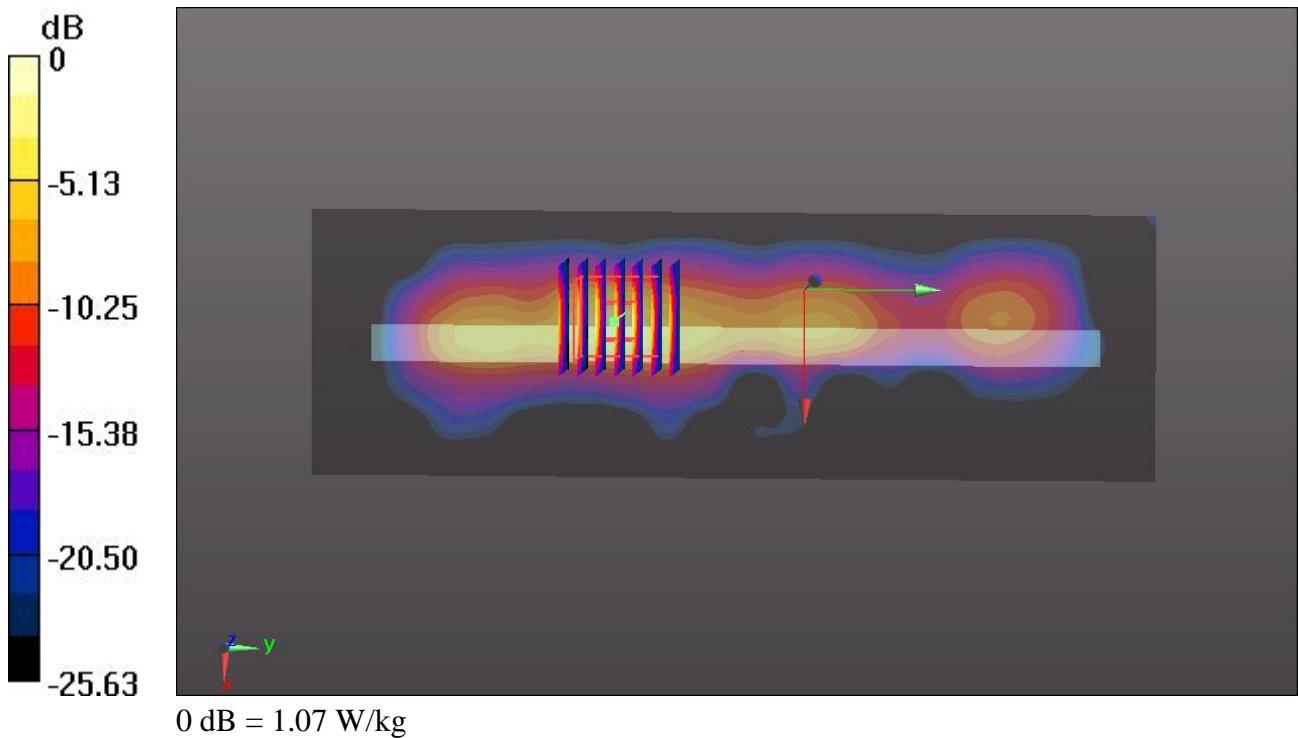

34 WLAN2.4G 802.11b_Bottom Face_0cm_Ch1

DUT: 342211-01

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.906 \text{ mho/m}$; $\epsilon_r =$

54.182 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (61x191x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 1.21 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.031 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.338 mW/g

SAR(1 g) = 0.812 mW/g ; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 1.50 W/kg

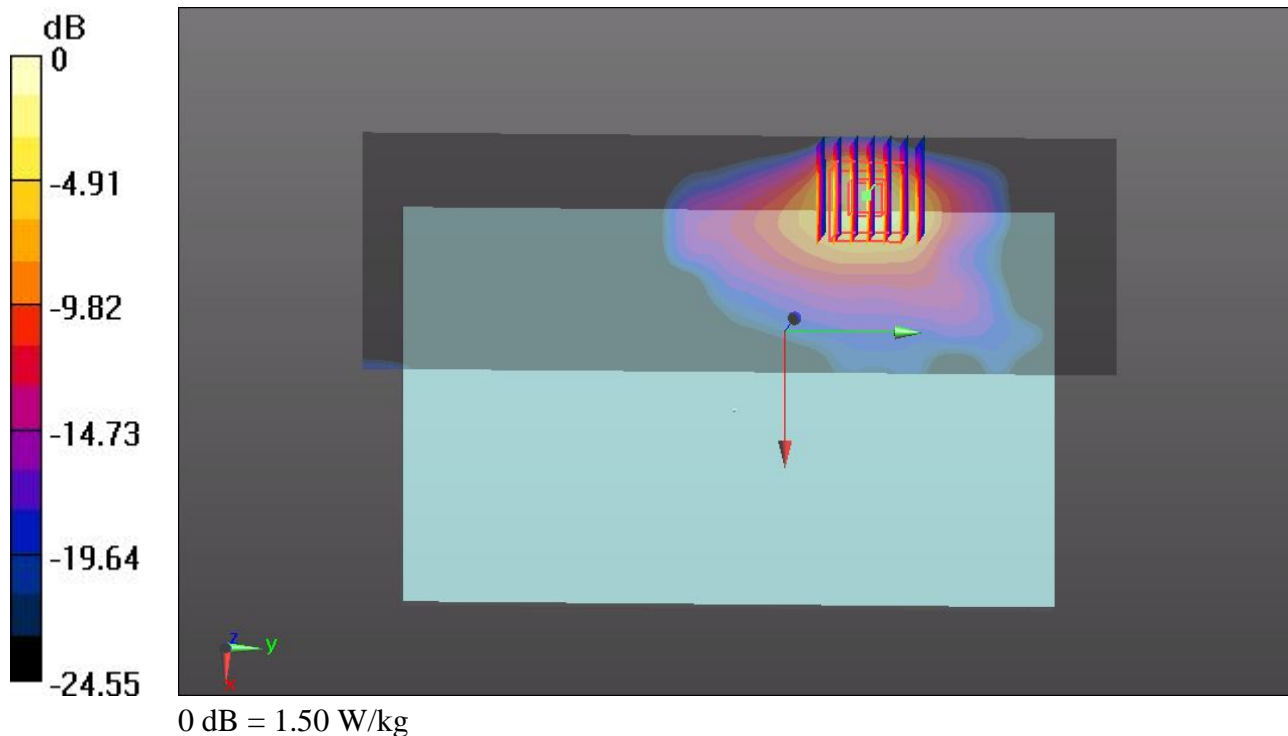

35 WLAN2.4G 802.11b_Bottom Face_0cm_Ch6

DUT: 342211-01

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.949 \text{ mho/m}$; $\epsilon_r =$

54.149 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch6/Area Scan (61x191x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 1.17 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.642 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.501 mW/g

SAR(1 g) = 0.860 mW/g ; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 1.56 W/kg

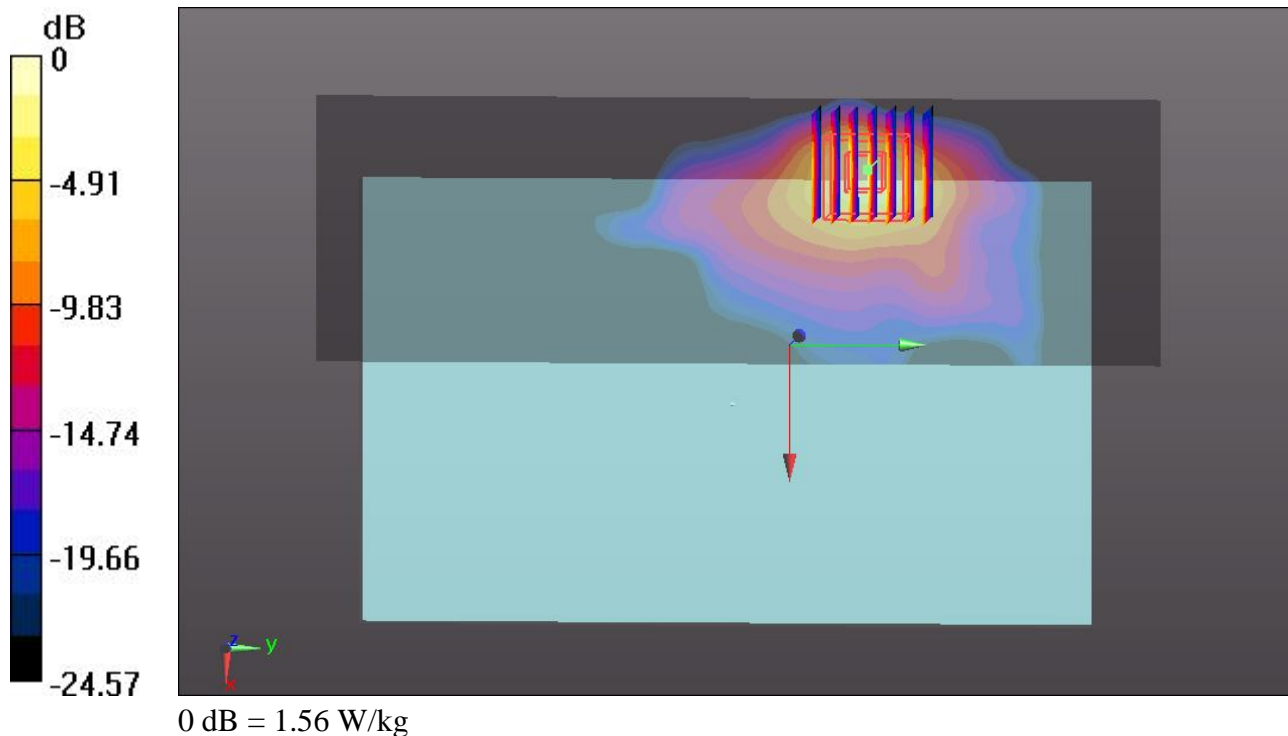

36 WLAN2.4G 802.11b_Curve Face tilted 30 Degree_0cm_Ch11

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (131x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.560 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.361 mW/g

SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 1.29 W/kg

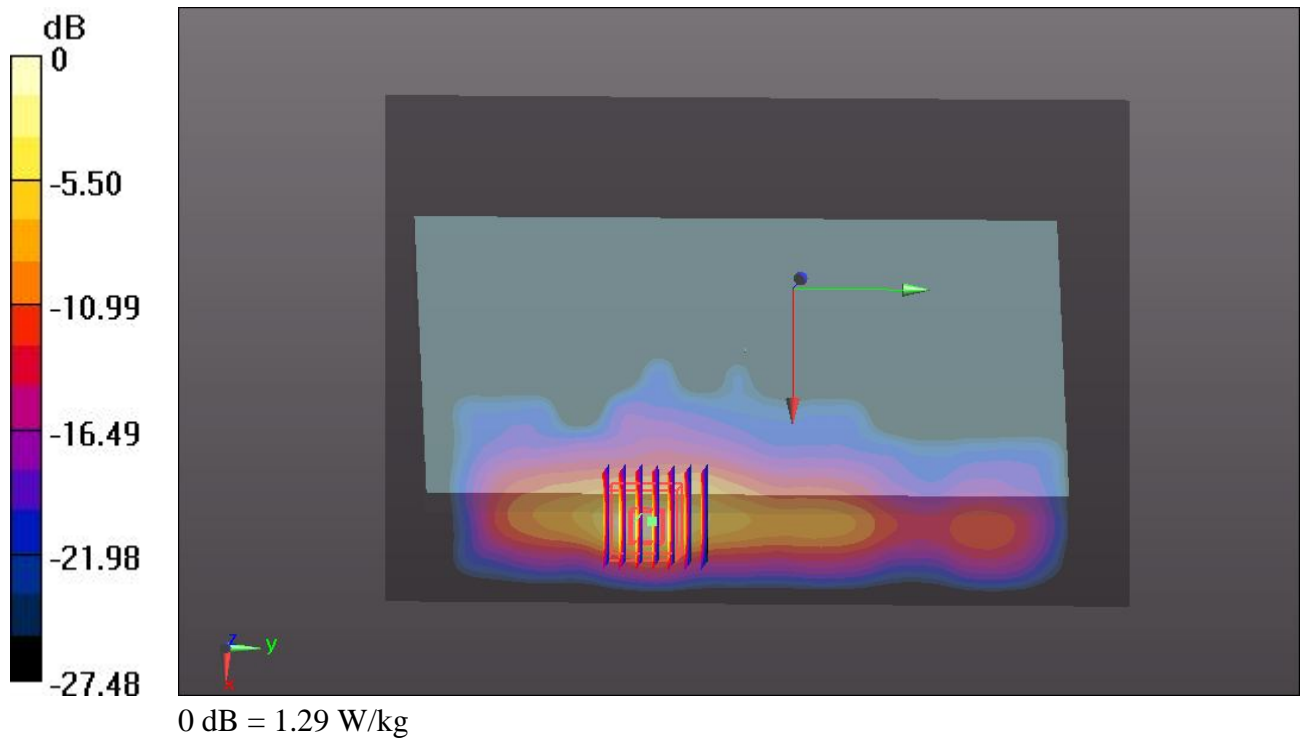

37 WLAN2.4G 802.11g_Bottom Face_0cm_Ch11

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (71x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.382 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.152 mW/g

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 1.35 W/kg

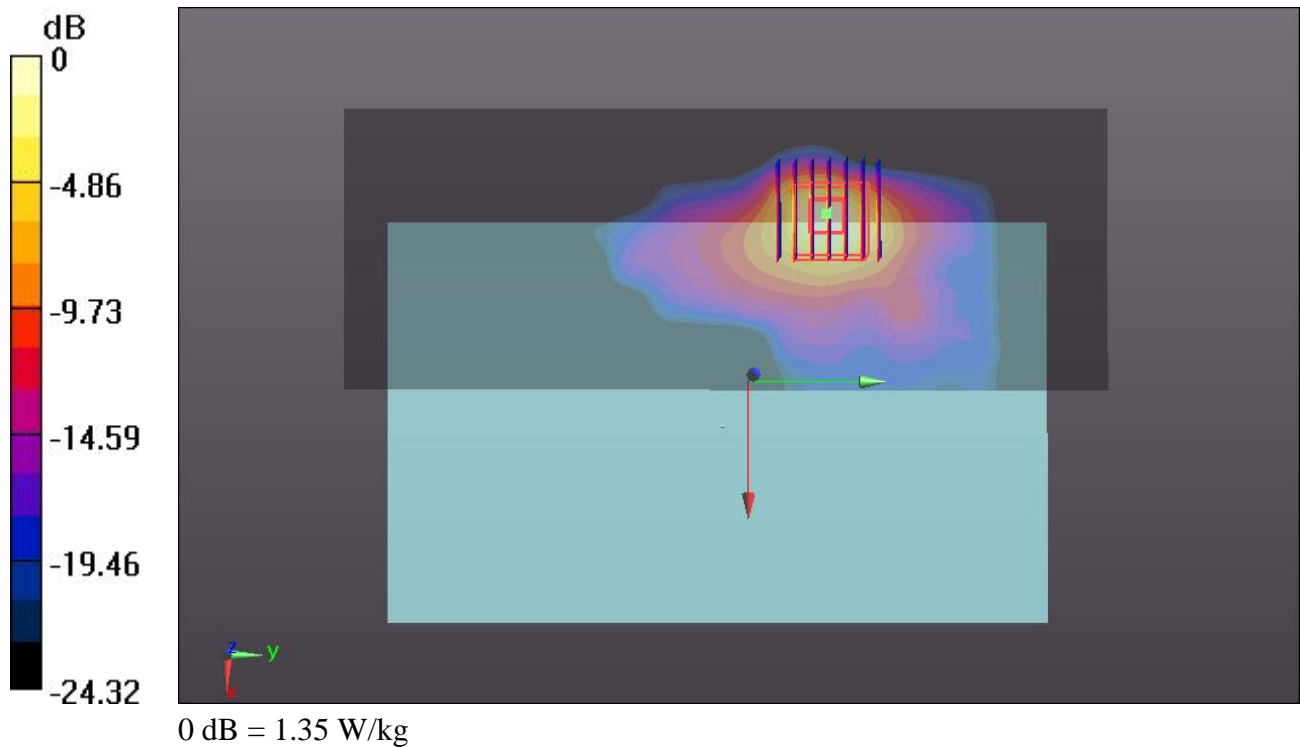

38 WLAN2.4G 802.11n_20M_Bottom Face_0cm_Ch11

DUT: 342211-01

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (71x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.57 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.682 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.684 mW/g

SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 1.62 W/kg

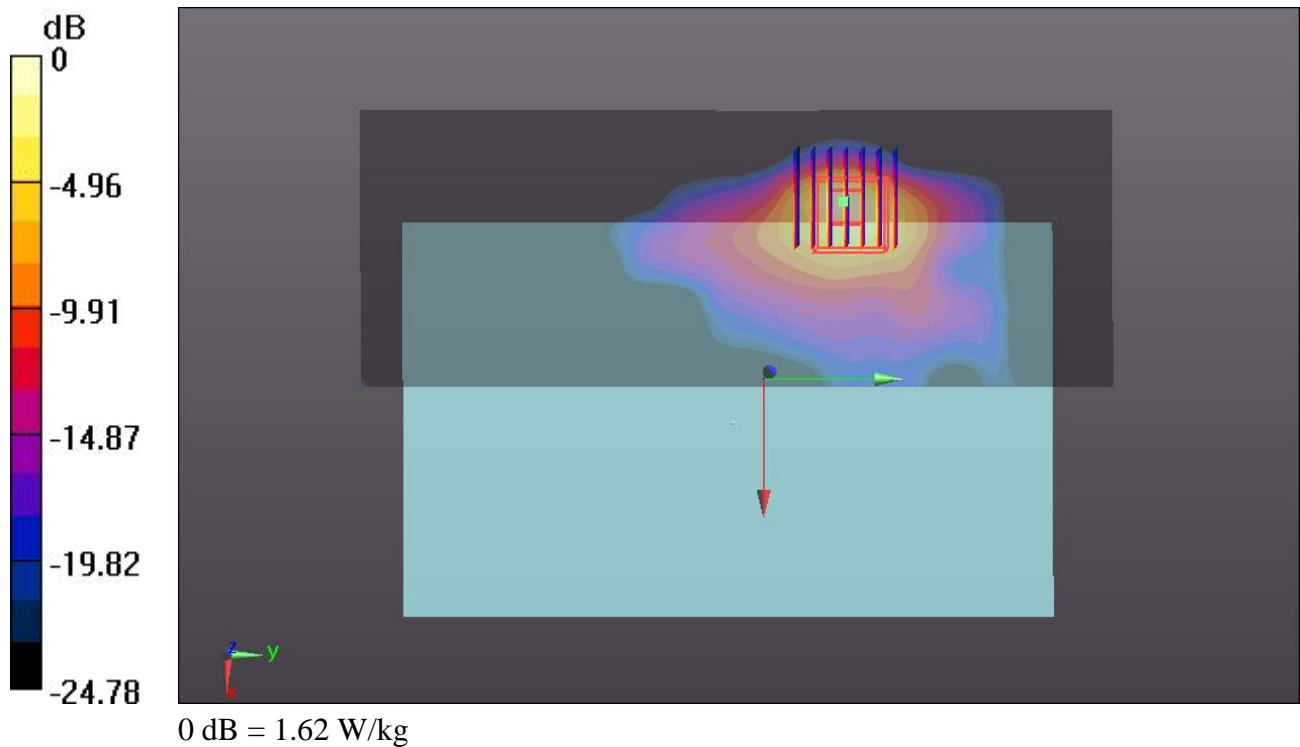

39 WLAN2.4G 802.11n_20M_Bottom Face_0cm_Ch1

DUT: 342211-01

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.906$ mho/m; $\epsilon_r = 54.182$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (71x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.583 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.747 mW/g

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 1.72 W/kg

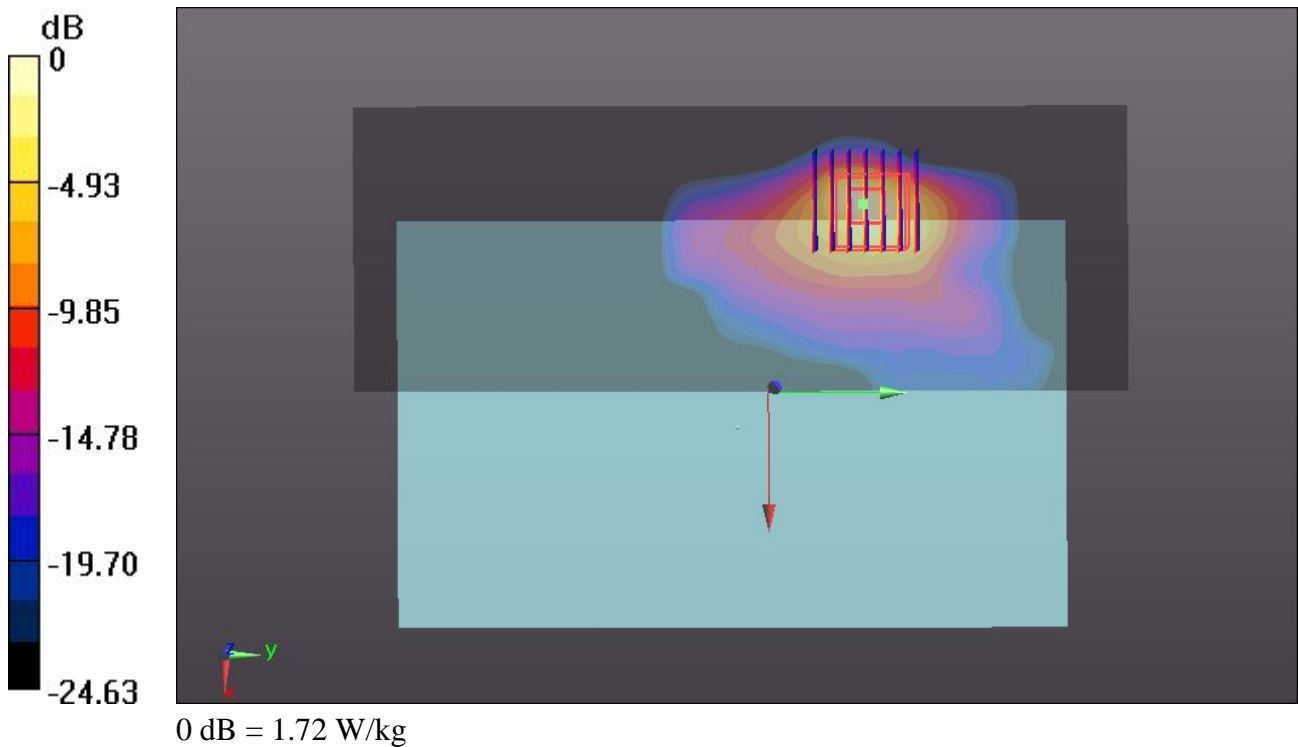

39 WLAN2.4G 802.11n_20M_Bottom Face_0cm_Ch1

DUT: 342211-01

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.906$ mho/m; $\epsilon_r = 54.182$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (71x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.583 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.747 mW/g

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 1.72 W/kg

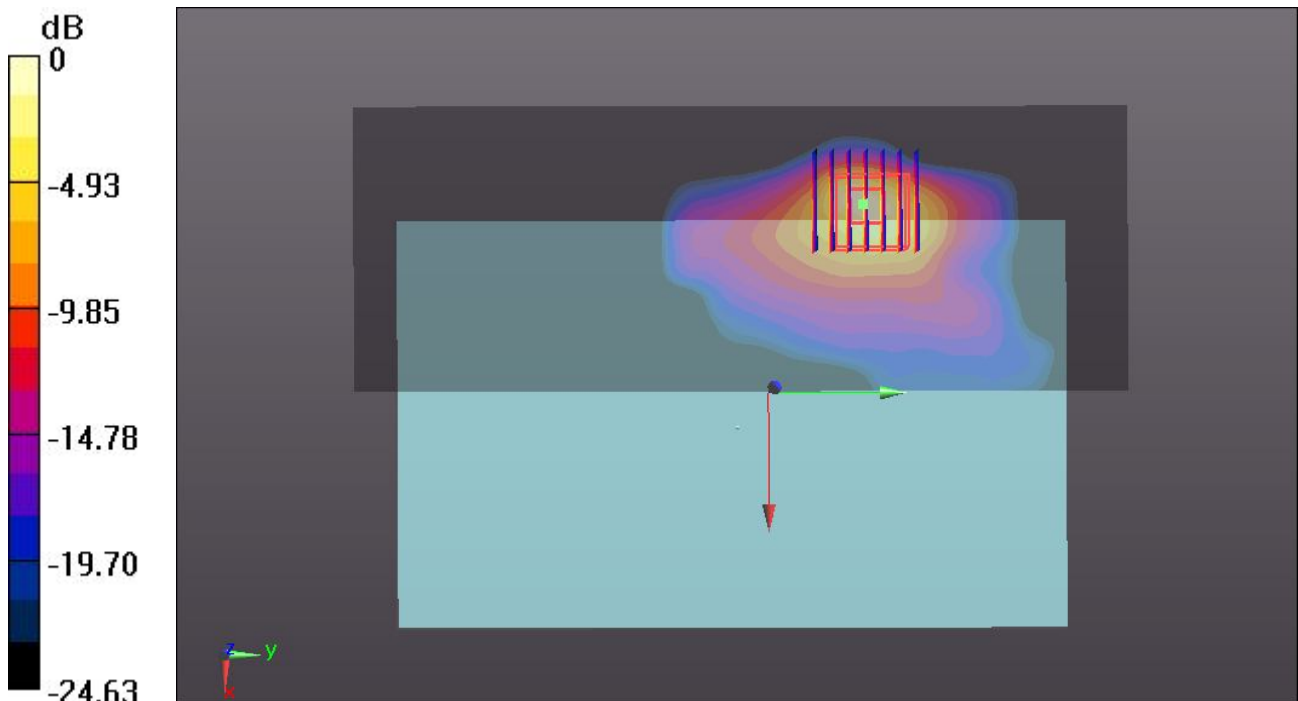

0 dB = 1.72 W/kg

40 WLAN2.4G 802.11n_20M_Bottom Face_0cm_Ch6

DUT: 342211-01

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130609 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.949$ mho/m; $\epsilon_r = 54.149$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch6/Area Scan (71x191x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.96 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.538 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.335 mW/g

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 2.03 W/kg

