



The Photos of SAR test

No. I14Z47765-SEM01

For

TCT Mobile Limited

HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone

Model Name: Yaris L US 1SIM ATV

Marketing Name: ONE TOUCH 5036A


With

Hardware Version: Lot1

Software Version: v4F16

FCC ID: RAD412

Issued Date: 2014-12-30

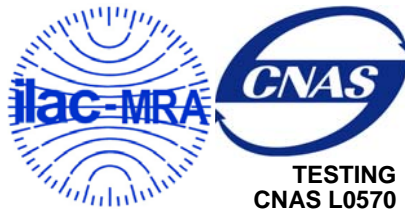

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504


Email:cttl_terminals@catr.cn, website:www.chinattl.com




Picture 1: Constituents of the sample Front



Picture 2: Constituents of the sample Rear

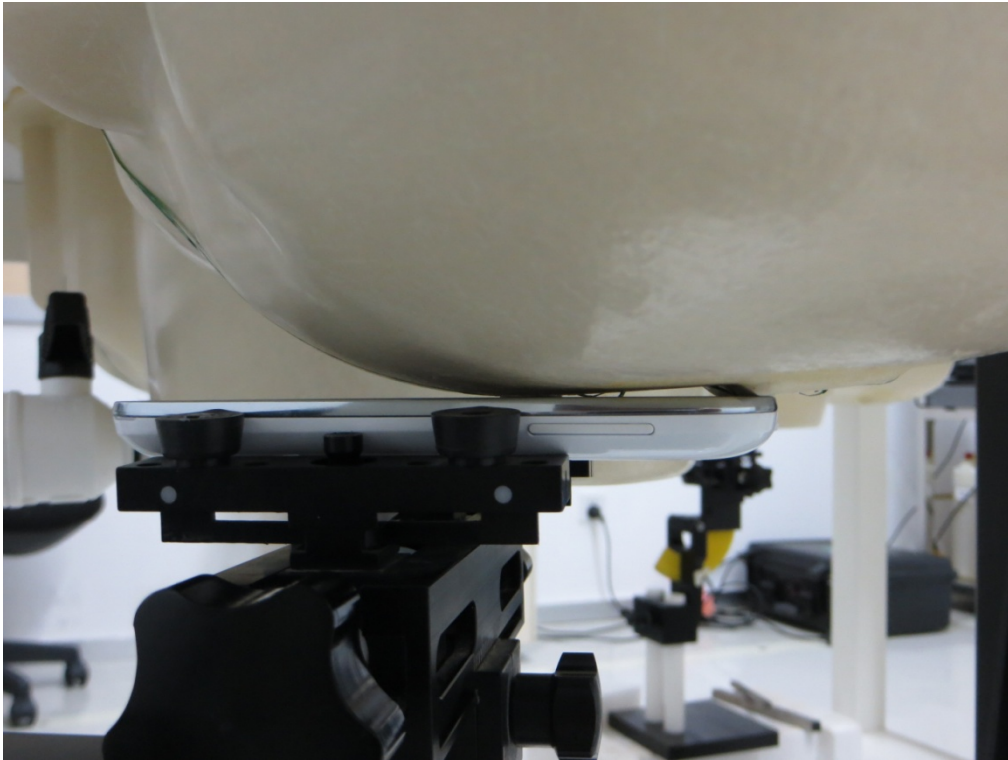


Picture 3: Left Hand Touch Cheek Position

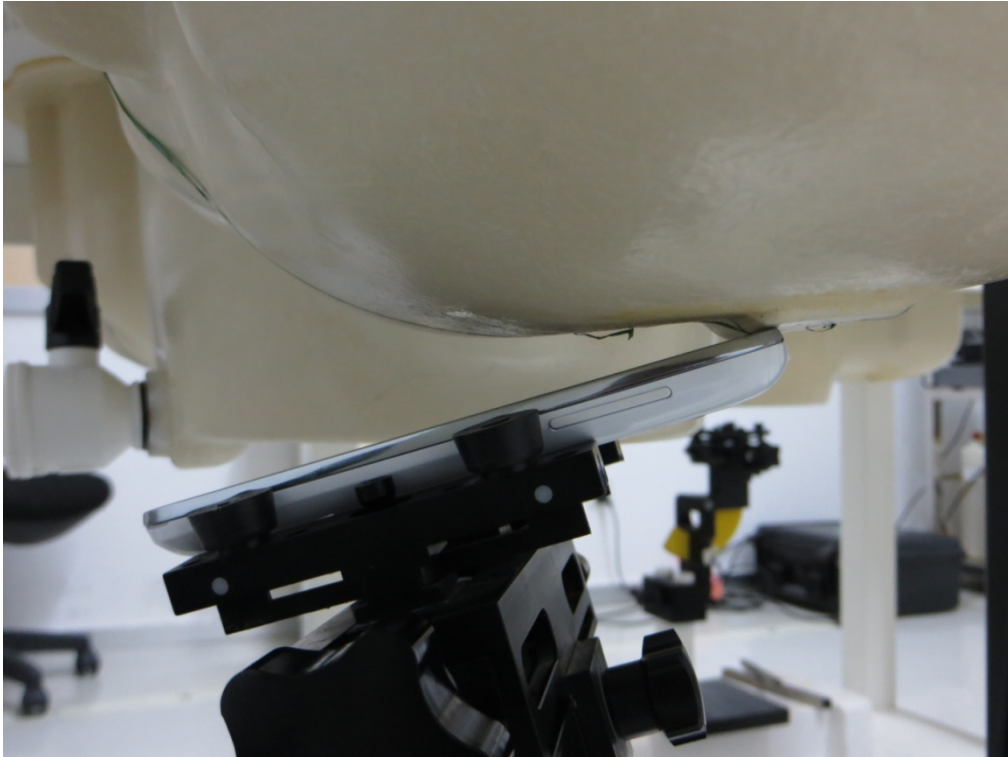

Picture 4: Left Hand Tilt 15° Position




Picture 5: Right Hand Touch Cheek Position

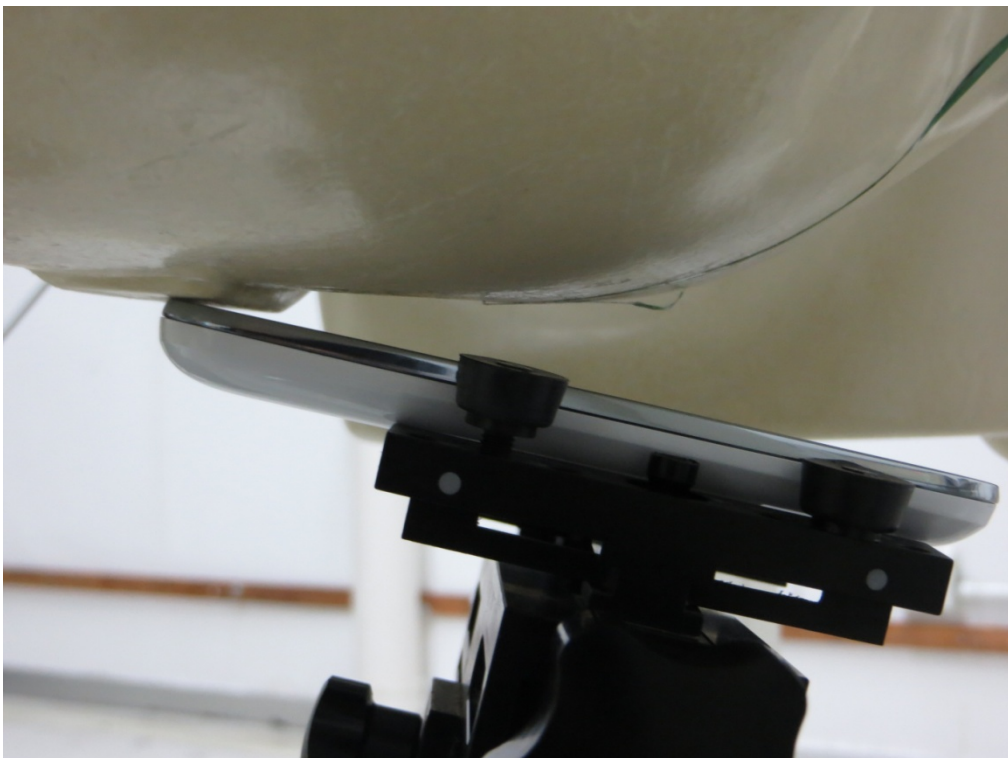


Picture 6: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

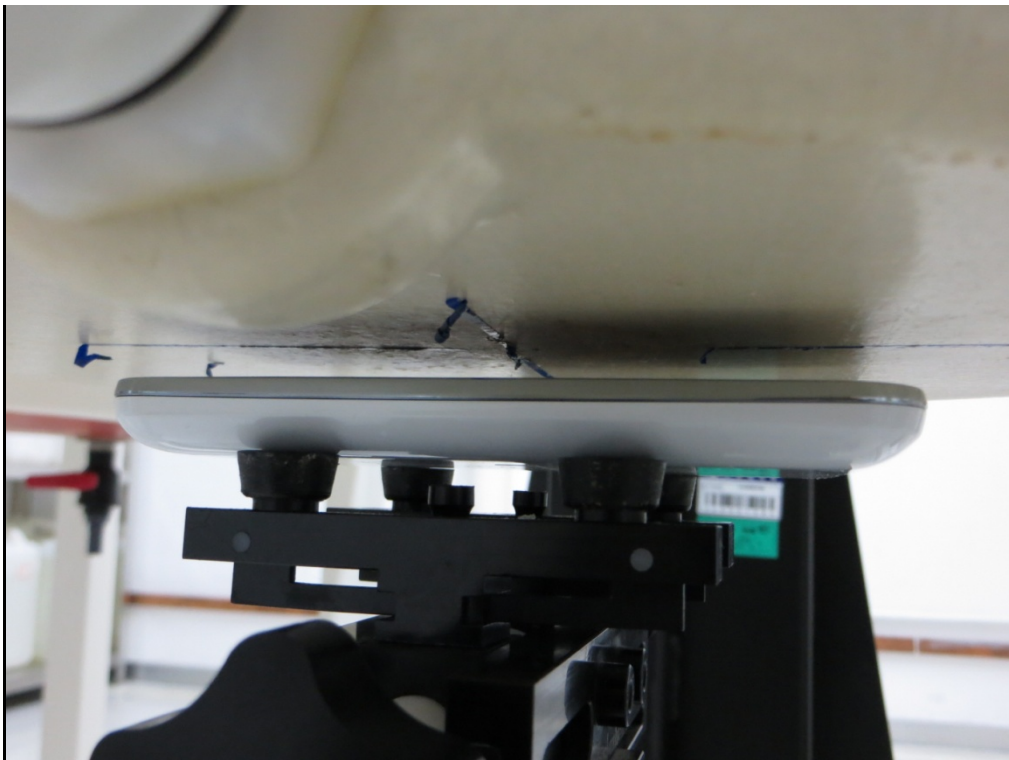


Picture 7: Front

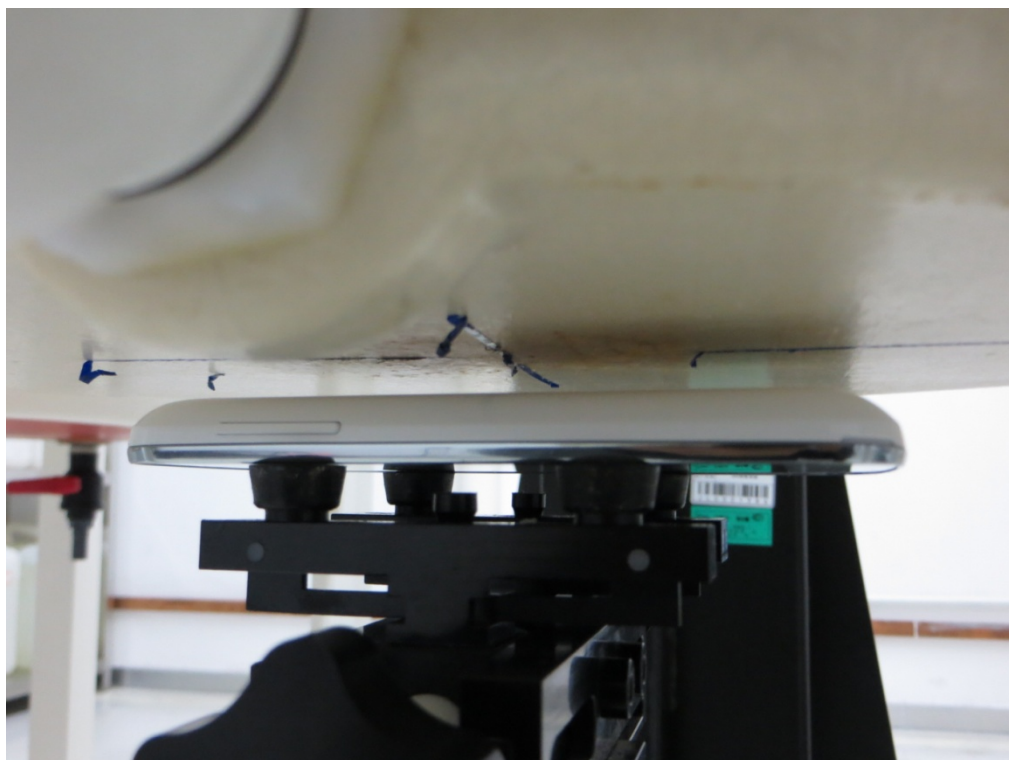


Picture 8: Rear

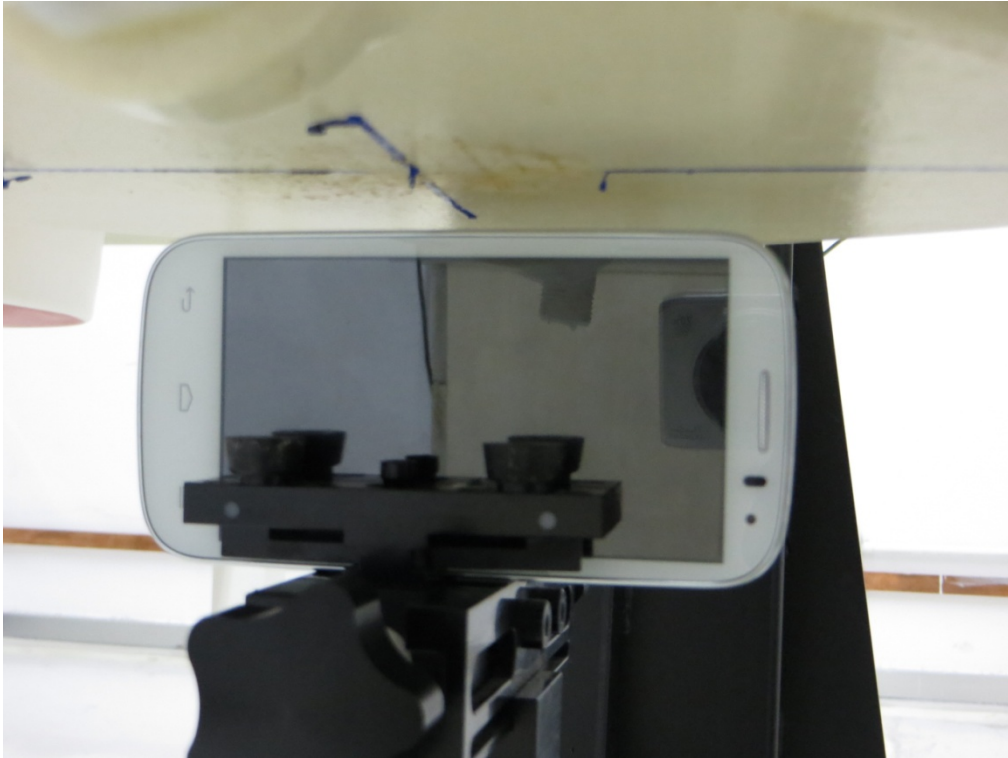


Picture 9: Left

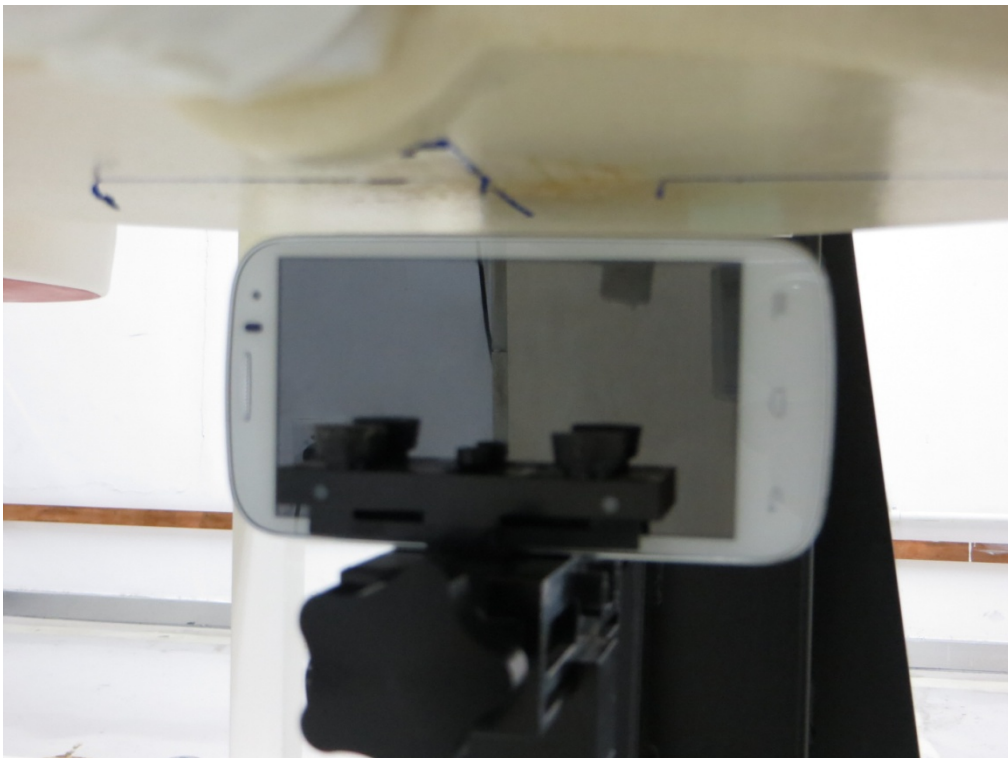


Picture 10: Right Edge

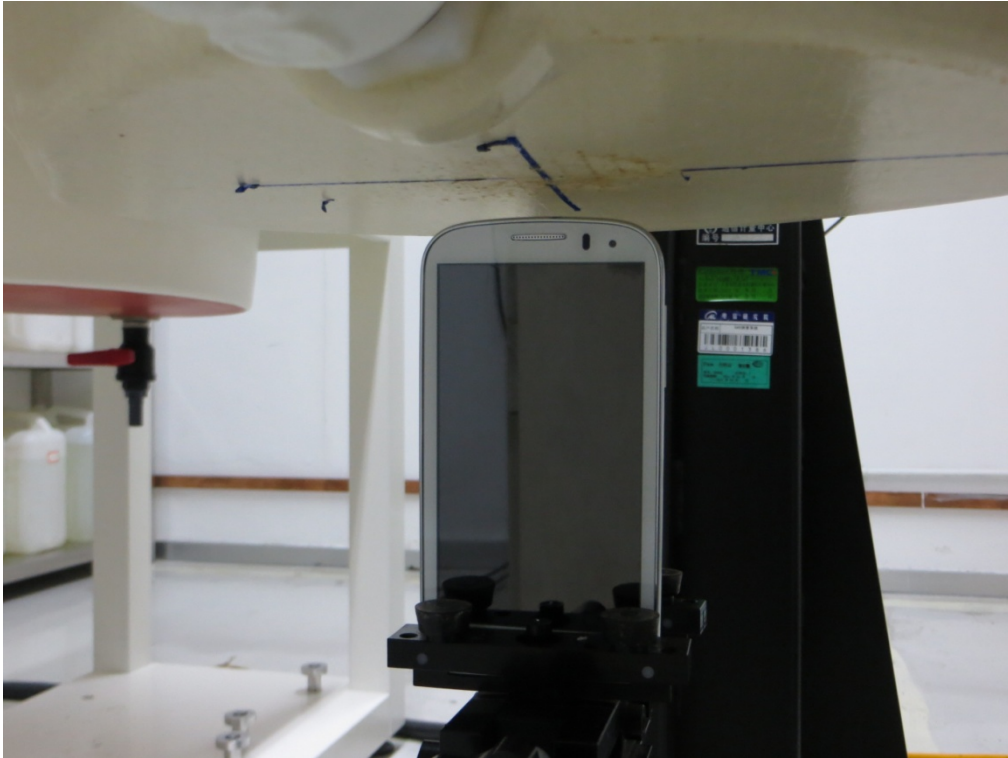

Picture 11: Top Edge

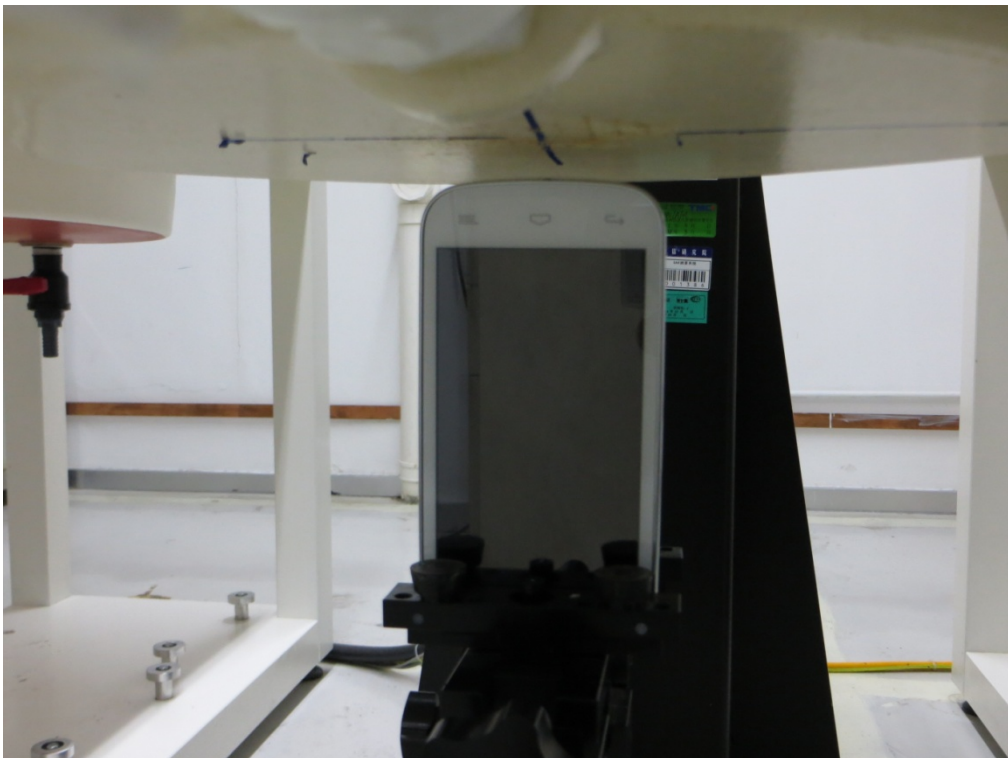

Picture 12: Bottom Edge

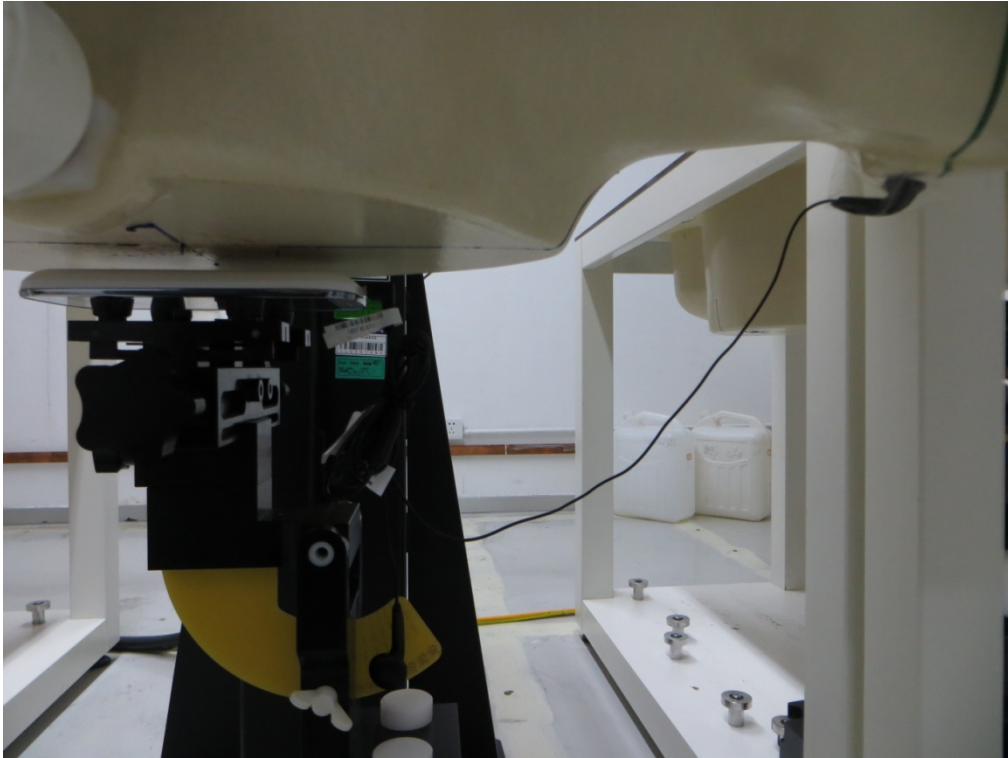

Picture 13: Rear Edge with Headset