



TEST REPORT

No. 2013TAR793

for

TCT Mobile Limited

GSM Quad band UMTS Tri-band mobile phone

Model Name: Tango+ 3G

Marketing Name: ALCATEL A383G

FCC ID: RAD422

with

Hardware Version: PIO2

Software Version: B32

Issued Date: 2013-12-19

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. NORMAL ACCESSORY SETTING	6
3.5. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS	11
A.1 OUTPUT POWER	11
A.2 EMISSION LIMIT	17
A.3 CONDUCTED EMISSION	24
A.4 FREQUENCY STABILITY	30
A.5 OCCUPIED BANDWIDTH	33
A.6 EMISSION BANDWIDTH	39
A.7 BAND EDGE COMPLIANCE	45
A.8 CONDUCTED SPURIOUS EMISSION	48

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2013-11-18
Testing End Date: 2013-12-05

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited#
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited#
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad band UMTS Tri-band mobile phone
Model Name	Tango+ 3G
Marketing Name	ALCATEL A383G
FCC ID	RAD422
Frequency	GSM850; PCS1900; WCDMA Band II; WCDMA Band IV;WCDMA Band V
Antenna	Integrated
Output power	24.12dBm maximum EIRP measured for Band II
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N14	013859000003156	PIO2	B32
N15	013859000002083	PIO2	B32

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	TCT-B-0194
AE2	Battery	/	TCT-B-0210
AE3	Battery	/	TCT-B-0493
AE4	Battery	/	TCT-B-1026
AE5	Travel charger	/	TCT-CHR-0645
AE6	Travel charger	/	TCT-CHR-0964

AE1, AE2, AE3, AE4

Model	CAB31L0000C1
Manufacturer	BYD
Capacitance	1000 mAh
Nominal voltage	3.8V

AE5, AE6

Model	CBA3007AG0C1
Manufacturer	BYD

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM Quad band UMTS Tri-band mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-12 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-12 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-12 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	2011

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(c)/27.50(d)(2)	P
2	Emission Limit	2.1051/22.917/24.238/27.53(h)	P
3	CONDUCTED EMISSION	15.107/15.207	P
4	Frequency Stability	2.1055/24.235/ 27.54	P
5	Occupied Bandwidth	2.1049(h)(i)	P
6	Emission Bandwidth	22.917(b)/24.238(b)/ 27.53(g)	P
7	Band Edge Compliance	22.917(b)/24.238(b)/ 27.53(g)	P
8	Conducted Spurious Emission	2.1057/22.917/24.238/ 27.53(g)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2014-03-28
2	Test Receiver	ESU26	100235	R&S	2014-01-05
3	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
4	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
5	LISN	ESH2-Z5	829991/012	R&S	2014-04-14
6	Universal Radio Communication Tester	CMU200	102228	R&S	2014-06-23
7	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2014-03-16
8	Spectrum Analyzer	E4440A	MY48250642	Agilent	2014-03-04
9	EMI Antenna	9117	177	Schwarzbeck	2014-06-29
10	EMI Antenna	VULB 9163	482	Schwarzbeck	2014-02-17
11	EMI Antenna	3117	00119024	ETS-Lindgren	2014-02-02
12	EMI Antenna	3117	00058889	ETS-Lindgren	2014-02-02
13	Signal Generator	N5183A	MY49060052	Agilent	2014-03-18
14	Climate chamber	SH-241	92003546	ESPEC	2014-05-11
15	Loop Antenna	HFH2-Z2	829324/007	R&S	2014-12-12

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak). These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V and 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV (bottom, middle and top of operational frequency range).

Limit

According to FCC §2.1046.

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

WCDMA Band II

Measurement result

WCDMA (Band II)	CH	Frequency(MHz)	output power(dBm)
	9262	1852.4	22.07
	9400	1880.0	21.73
	9538	1907.6	21.87

WCDMA Band V

Measurement result

WCDMA (Band V)	CH	Frequency(MHz)	output power(dBm)
	4132	826.4	22.07
	4183	836.6	21.97
	4233	846.6	22.00

WCDMA Band IV
Measurement result

WCDMA (Band IV)	CH	Frequency(MHz)	output power(dBm)
	1312	1712.4	22.59
	1450	1740.0	22.51
	1513	1752.6	22.39

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts." Rule Part 27.50(d)(2) specifies, "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

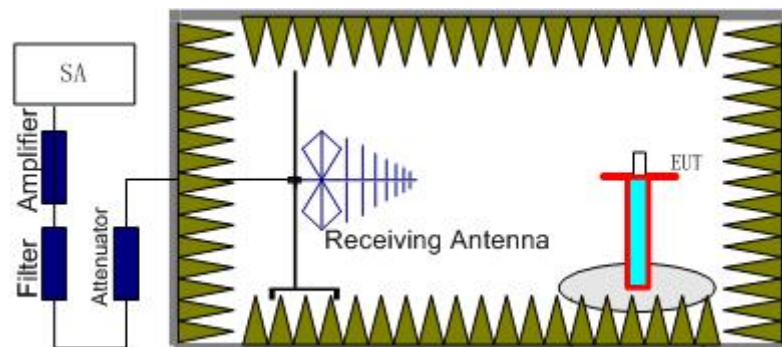

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

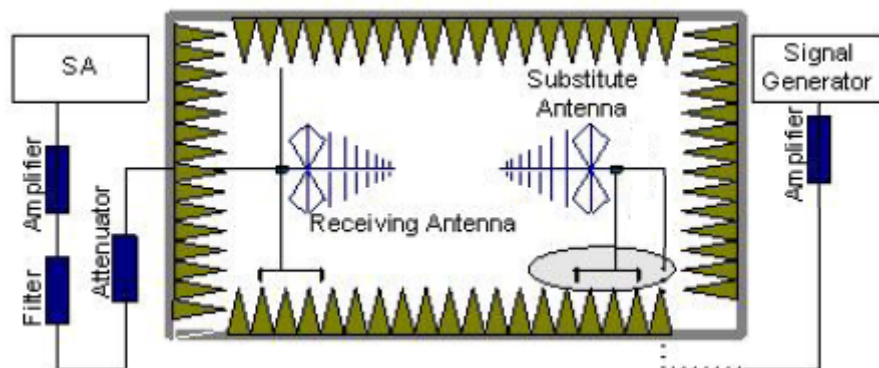

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

WCDMA Band II-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.40	-30.24	3.18	-50.00	-4.55	21.13	33.00	11.87	H
1880.00	-29.24	3.11	-50.00	-4.43	22.08	33.00	10.92	H
1907.60	-27.01	3.18	-50.00	-4.31	24.12	33.00	8.88	H

Frequency: 1907.60MHz

Peak EIRP(dBm)= P_{Mea}(-27.01dBm)- P_{cl}(3.18dB)- P_{Ag}(-50.00dB)-G_a(-4.31dB) =24.12dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz

WCDMA Band V-ERP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band V	≤38.45dBm

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.40	-25.20	2.07	-53.00	0.85	2.15	22.73	38.45	15.72	H
836.60	-25.04	2.08	-53.00	0.90	2.15	22.83	38.45	15.62	H
846.60	-24.27	2.09	-53.00	0.94	2.15	23.55	38.45	14.90	H

Frequency: 846.60MHz

Peak ERP(dBm)= P_{Mea}(-24.27dBm)- P_{cl}(2.09dB)- P_{Ag}(-53.00dB)-G_a (0.94dB)-2.15dB=23.55dBm

ANALYZER SETTINGS: RBW = VBW = 5MHz

WCDMA Band IV-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	30dBm (1W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.40	-29.94	2.97	-50.00	-5.17	22.26	30.00	10.74	H
1740.00	-28.32	2.99	-50.00	-5.04	23.73	30.00	9.27	H
1752.60	-28.50	3.01	-50.00	-4.99	23.48	30.00	9.52	H

Frequency: 1740.00MHz

Peak EIRP(dBm)= $P_{\text{Mea}}(-28.32\text{dBm}) - P_{\text{cl}}(2.99\text{dB}) - P_{\text{Ag}}(-50.00\text{dB}) - G_{\text{a}}(-5.04\text{dB}) = 23.73\text{dBm}$

ANALYZER SETTINGS: RBW = VBW = 5MHz

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

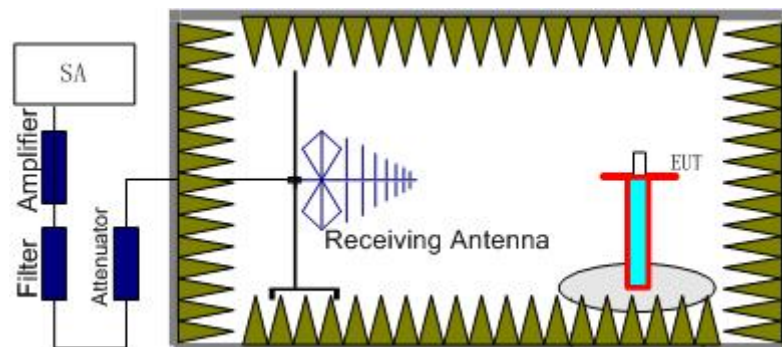

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

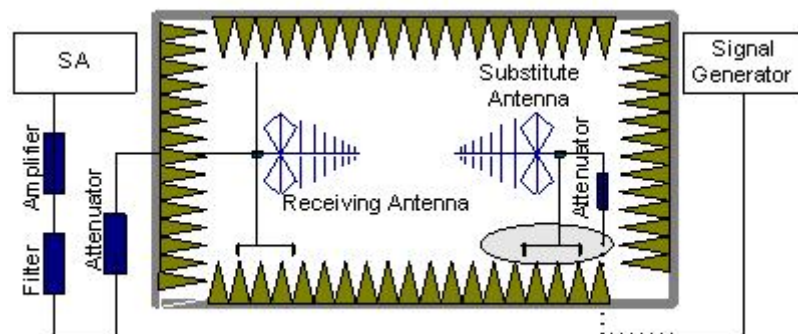

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238 , Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) , WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II and WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	9KHz-10GHz	Pass
	Middle	9KHz-10GHz	Pass
	High	9KHz-10GHz	Pass
WCDMA Band II	Low	9KHz-20GHz	Pass
	Middle	9KHz-20GHz	Pass
	High	9KHz-20GHz	Pass
WCDMA Band IV	Low	9KHz-20GHz	Pass
	Middle	9KHz-20GHz	Pass
	High	9KHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.000009~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.000009~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
WCDMA Band IV	0.000009~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3706.45	-52.61	4.42	-8.15	-48.88	-13.00	35.88	V
5555.84	-48.17	5.45	-10.02	-43.60	-13.00	30.60	H
7805.39	-61.63	6.85	-11.71	-56.77	-13.00	43.77	H
8958.40	-60.78	7.31	-12.57	-55.52	-13.00	42.52	H
10250.87	-59.30	7.50	-12.45	-54.35	-13.00	41.35	H
12445.82	-55.92	8.76	-12.68	-52.00	-13.00	39.00	H

WCDMA BAND II Mode Channel 9400/1880MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3762.63	-51.13	4.52	-8.22	-47.43	-13.00	34.43	H
5636.39	-40.90	5.46	-10.05	-36.31	-13.00	23.31	H
7516.75	-60.66	6.76	-11.42	-56.00	-13.00	43.00	H
8830.23	-61.93	7.37	-12.46	-56.84	-13.00	43.84	V
10104.97	-59.35	8.19	-12.42	-55.12	-13.00	42.12	H
12834.04	-57.82	9.06	-13.10	-53.78	-13.00	40.78	V

WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3816.81	-49.29	4.49	-8.28	-45.50	-13.00	32.50	H
5726.26	-36.70	5.54	-10.09	-32.15	-13.00	19.15	H
6877.13	-61.52	6.07	-10.98	-56.61	-13.00	43.61	H
8740.82	-59.83	7.32	-12.39	-54.76	-13.00	41.76	H
9983.89	-60.94	7.95	-12.41	-56.48	-13.00	43.48	H
12517.78	-59.37	8.89	-12.72	-55.54	-13.00	42.54	V

WCDMA BAND V Mode Channel 4132/826.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3302.47	-48.23	4.19	-7.43	2.15	-47.14	-13.00	34.14	V
4138.10	-59.06	4.67	-8.58	2.15	-57.30	-13.00	44.30	V
5403.13	-64.18	5.41	-9.94	2.15	-61.80	-13.00	48.80	V
6836.04	-60.19	6.18	-10.94	2.15	-57.58	-13.00	44.58	V
7898.43	-61.04	6.92	-11.80	2.15	-58.31	-13.00	45.31	H
8503.09	-62.17	7.01	-12.20	2.15	-59.13	-13.00	46.13	H

WCDMA BAND V Mode Channel 4183/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3342.22	-56.76	4.21	-7.52	2.15	-55.60	-13.00	42.60	V
4177.78	-62.16	4.69	-8.61	2.15	-60.39	-13.00	47.39	V
4944.08	-63.16	5.11	-9.60	2.15	-60.82	-13.00	47.82	V
5658.69	-61.03	5.46	-10.06	2.15	-58.58	-13.00	45.58	V
6609.47	-61.73	6.10	-10.71	2.15	-59.27	-13.00	46.27	H
7968.36	-60.16	7.00	-11.87	2.15	-57.44	-13.00	44.44	H

WCDMA BAND V Mode Channel 4233/846.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3381.62	-55.16	4.23	-7.62	2.15	-53.92	-13.00	40.92	H
4322.51	-62.24	4.86	-8.69	2.15	-60.56	-13.00	47.56	V
5135.25	-61.52	5.24	-9.78	2.15	-59.13	-13.00	46.13	V
6321.40	-61.27	5.87	-10.46	2.15	-58.83	-13.00	45.83	V
6879.09	-61.88	6.07	-10.98	2.15	-59.12	-13.00	46.12	V
7904.19	-60.91	7.01	-11.80	2.15	-58.27	-13.00	45.27	H

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422.37	-55.56	4.19	-7.71	-52.04	-13.00	39.04	V
5133.61	-61.71	5.25	-9.78	-57.18	-13.00	44.18	H
6844.78	-59.76	6.17	-10.94	-54.99	-13.00	41.99	V
9119.13	-61.23	7.61	-12.60	-56.24	-13.00	43.24	V
10133.80	-58.40	7.96	-12.43	-53.93	-13.00	40.93	H
13251.11	-56.07	9.11	-13.55	-51.63	-13.00	38.63	H

WCDMA BAND IV Mode Channel 1450/1740MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3482.48	-54.34	4.25	-7.86	-50.73	-13.00	37.73	H
5101.64	-62.22	5.22	-9.76	-57.68	-13.00	44.68	V
6824.53	-61.41	6.18	-10.92	-56.67	-13.00	43.67	V
8579.70	-60.93	7.23	-12.26	-55.90	-13.00	42.90	H
10086.33	-59.35	8.23	-12.42	-55.16	-13.00	42.16	H
10757.58	-59.12	7.87	-12.45	-54.54	-13.00	41.54	H

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3506.73	-54.87	4.32	-7.91	-51.28	-13.00	38.28	V
5261.68	-61.53	5.30	-9.86	-56.97	-13.00	43.97	V
7005.26	-60.78	6.28	-11.10	-55.96	-13.00	42.96	V
8620.95	-61.06	7.42	-12.30	-56.18	-13.00	43.18	V
10101.72	-59.27	8.20	-12.42	-55.05	-13.00	42.05	V
11369.66	-58.17	8.64	-12.40	-54.41	-13.00	41.41	V

Note:

The radiated spurious emission measurement over 9kHz - 30MHz had been investigated. All spurious emissions were attenuated at least 20dB compared to the limit.

A.3 CONDUCTED EMISSION


The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

A.3.2 Measurement result

WCDMA Band II

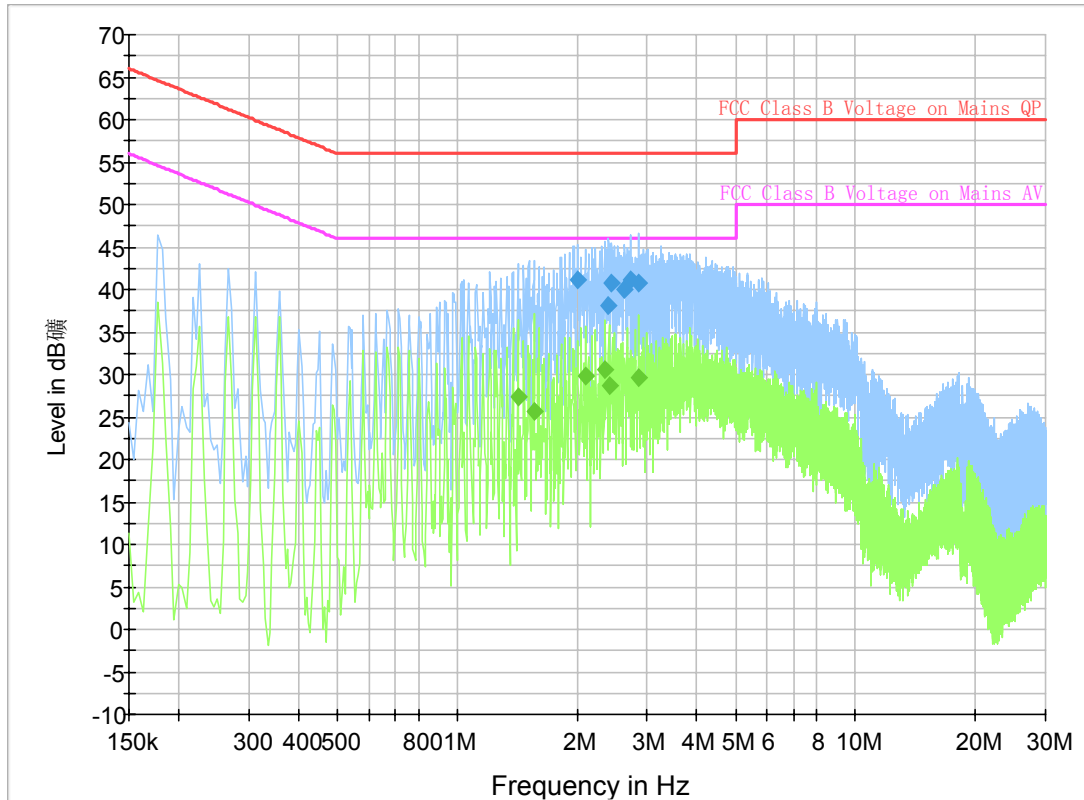


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.004000	41.1	GND	N	9.7	14.9	56.0
2.400000	38.1	GND	N	9.7	17.9	56.0
2.445000	40.8	GND	L1	9.7	15.2	56.0
2.634000	40.0	GND	L1	9.7	16.0	56.0
2.719500	41.2	GND	N	9.7	14.8	56.0
2.850000	40.8	GND	N	9.7	15.2	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.423500	27.3	GND	L1	9.7	18.7	46.0
1.563000	25.6	GND	L1	9.7	20.4	46.0
2.098500	29.8	GND	L1	9.7	16.2	46.0
2.359500	30.5	GND	L1	9.7	15.5	46.0
2.404500	28.7	GND	L1	9.7	17.3	46.0
2.850000	29.7	GND	N	9.7	16.3	46.0

WCDMA Band V

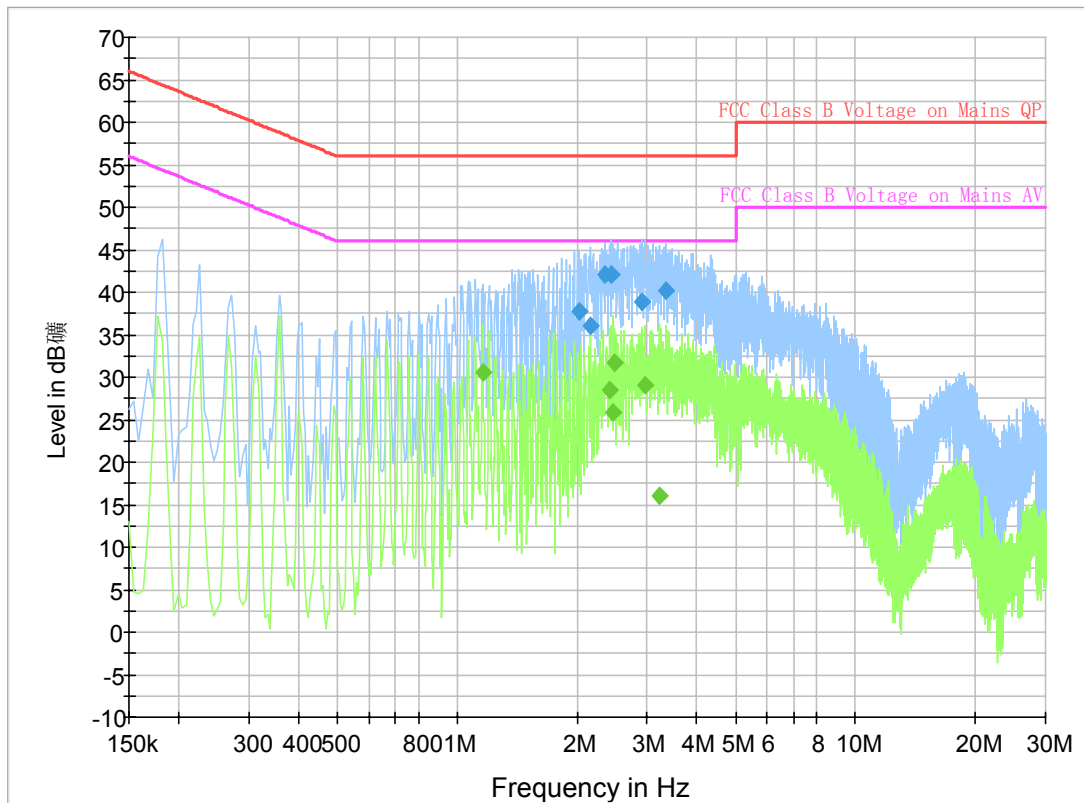


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.017500	37.7	GND	L1	9.7	18.3	56.0
2.166000	36.1	GND	N	9.7	19.9	56.0
2.350500	42.1	GND	L1	9.7	13.9	56.0
2.440500	42.0	GND	N	9.7	14.0	56.0
2.904000	38.8	GND	L1	9.7	17.2	56.0
3.340500	40.1	GND	L1	9.7	15.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.158000	30.6	GND	L1	9.7	15.4	46.0
2.409000	28.5	GND	L1	9.7	17.5	46.0
2.454000	25.9	GND	L1	9.7	20.1	46.0
2.485500	31.7	GND	N	9.7	14.3	46.0
2.967000	29.0	GND	N	9.7	17.0	46.0
3.210000	16.0	GND	L1	9.7	30.0	46.0

WCDMA Band IV

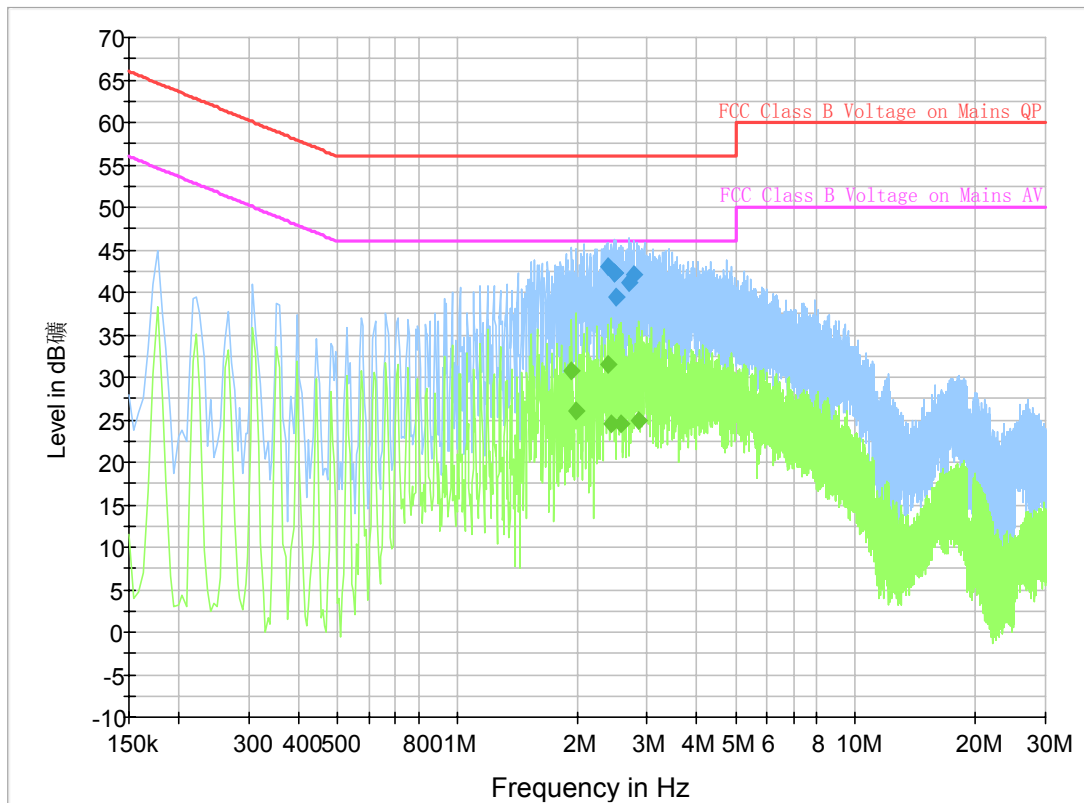


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.382000	43.1	GND	L1	9.7	12.9	56.0
2.472000	42.2	GND	L1	9.7	13.8	56.0
2.494500	42.3	GND	N	9.7	13.7	56.0
2.512500	39.5	GND	L1	9.7	16.5	56.0
2.710500	41.1	GND	N	9.7	14.9	56.0
2.773500	42.1	GND	L1	9.7	13.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.941000	30.7	GND	L1	9.7	15.3	46.0
1.986000	26.1	GND	L1	9.7	19.9	46.0
2.382000	31.4	GND	L1	9.7	14.6	46.0
2.427000	24.5	GND	L1	9.7	21.5	46.0
2.580000	24.5	GND	N	9.7	21.5	46.0
2.863500	24.8	GND	L1	9.7	21.2	46.0

MP3

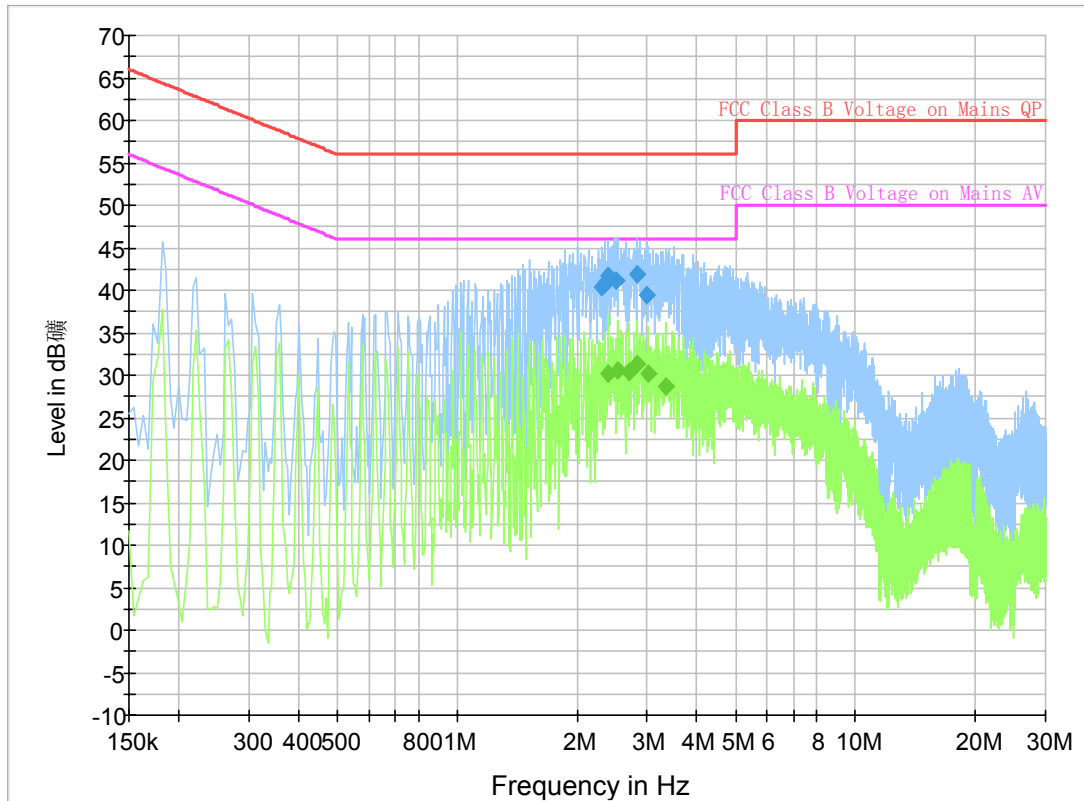


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.314500	40.4	GND	L1	9.7	15.6	56.0
2.355000	40.7	GND	L1	9.7	15.3	56.0
2.400000	41.7	GND	L1	9.7	14.3	56.0
2.503500	41.1	GND	N	9.7	14.9	56.0
2.836500	41.9	GND	L1	9.7	14.1	56.0
2.980500	39.5	GND	L1	9.7	16.5	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.400000	30.3	GND	L1	9.7	15.7	46.0
2.530500	30.6	GND	L1	9.7	15.4	46.0
2.706000	30.4	GND	L1	9.7	15.6	46.0
2.832000	31.4	GND	N	9.7	14.6	46.0
3.007500	30.2	GND	N	9.7	15.8	46.0
3.327000	28.6	GND	N	9.7	17.4	46.0

CAMERA

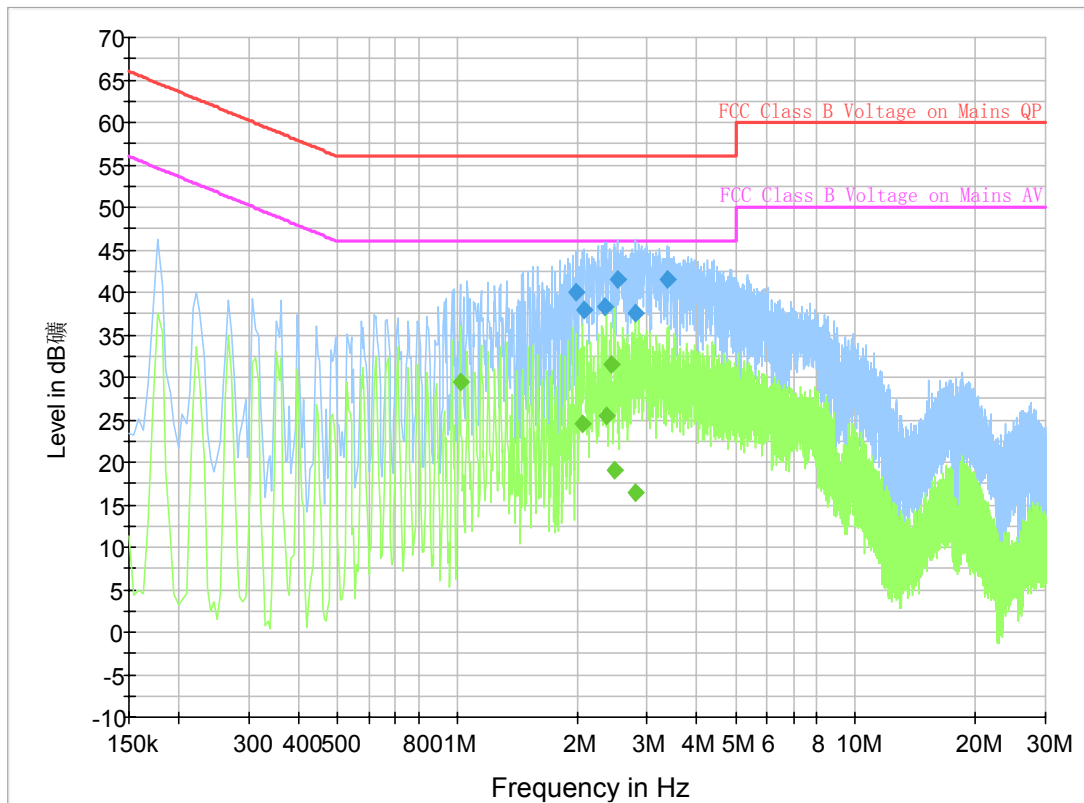

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.990500	40.1	GND	N	9.7	15.9	56.0
2.089500	38.0	GND	L1	9.7	18.0	56.0
2.355000	38.3	GND	L1	9.7	17.7	56.0
2.521500	41.4	GND	N	9.7	14.6	56.0
2.805000	37.6	GND	L1	9.7	18.5	56.0
3.358500	41.4	GND	L1	9.7	14.6	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.018500	29.5	GND	L1	9.7	16.5	46.0
2.062500	24.6	GND	L1	9.7	21.4	46.0
2.368500	25.5	GND	L1	9.7	20.5	46.0
2.431500	31.5	GND	N	9.7	14.5	46.0
2.476500	19.1	GND	N	9.7	26.9	46.0
2.805000	16.4	GND	L1	9.7	29.6	46.0

A.4 FREQUENCY STABILITY

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

WCDMA Band II

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	5	0.003
3.8	12	0.006
4.2	-7	0.004

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	8	0.004
-20	-8	0.004
-10	6	0.003
0	5	0.003
10	-9	0.005
20	-8	0.004
30	5	0.003
40	4	0.002
50	-5	0.003

WCDMA Band V

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	9	0.010
3.8	8	0.009
4.2	-5	0.006

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-4	0.005
-20	2	0.002
-10	4	0.005
0	8	0.009
10	4	0.005
20	6	0.007
30	-4	0.005
40	4	0.005
50	6	0.008

WCDMA Band IV

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	8	0.005
3.8	9	0.005
4.2	-9	0.005

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	7	0.004
-20	7	0.004
-10	7	0.004
0	8	0.005
10	9	0.005
20	6	0.004
30	5	0.003
40	5	0.003
50	9	0.005

A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II, WCDMA Band IV and WCDMA Band V . The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.167
1880.0	4.183
1907.6	4.151


WCDMA Band II

Channel 9262-Occupied Bandwidth (99% BW)

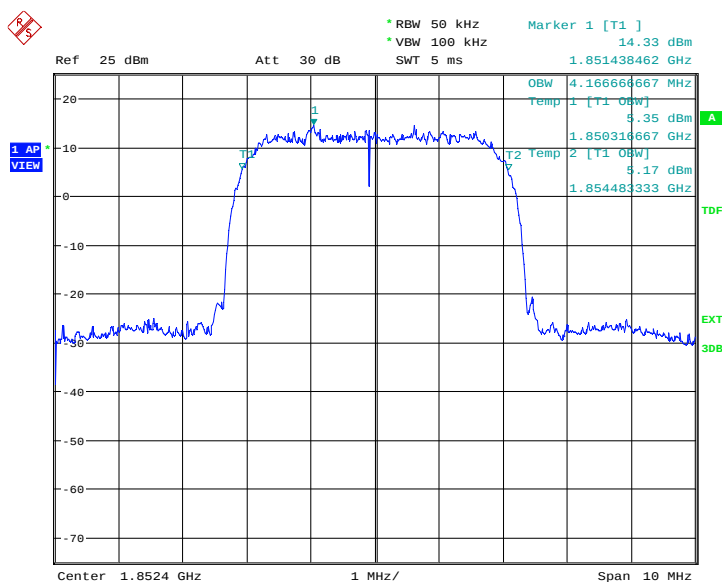


Date: 18.NOV.2013 16:26:46

Channel 9400-Occupied Bandwidth (99% BW)

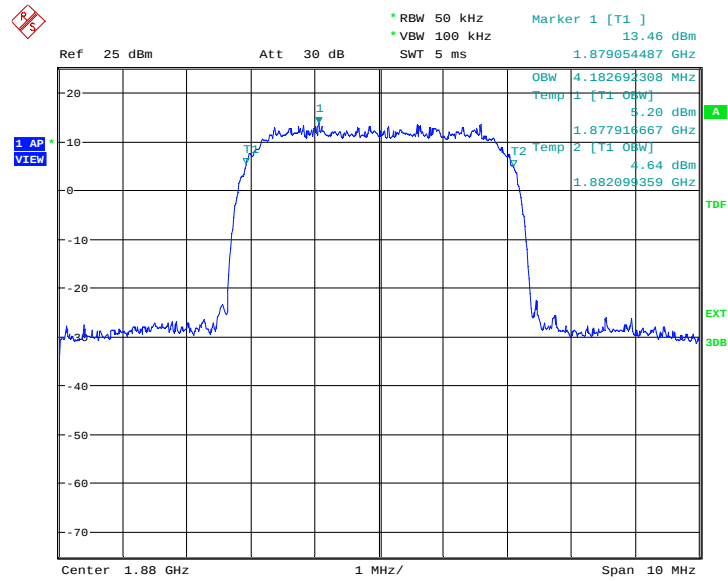

Date: 18.NOV.2013 16:27:20

Channel 9538-Occupied Bandwidth (99% BW)

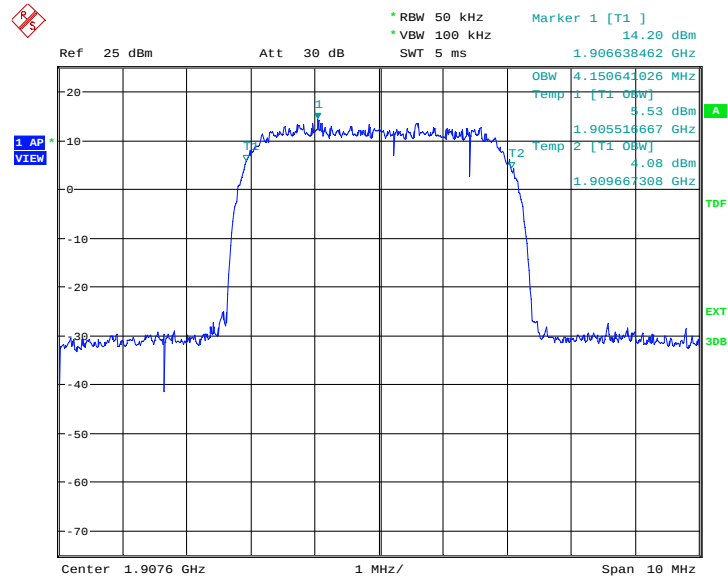


Date: 18.NOV.2013 16:27:54

WCDMA Band IV(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1712.4	4.167
1740.0	4.183
1752.6	4.167


WCDMA Band IV

Channel 1312-Occupied Bandwidth (99% BW)

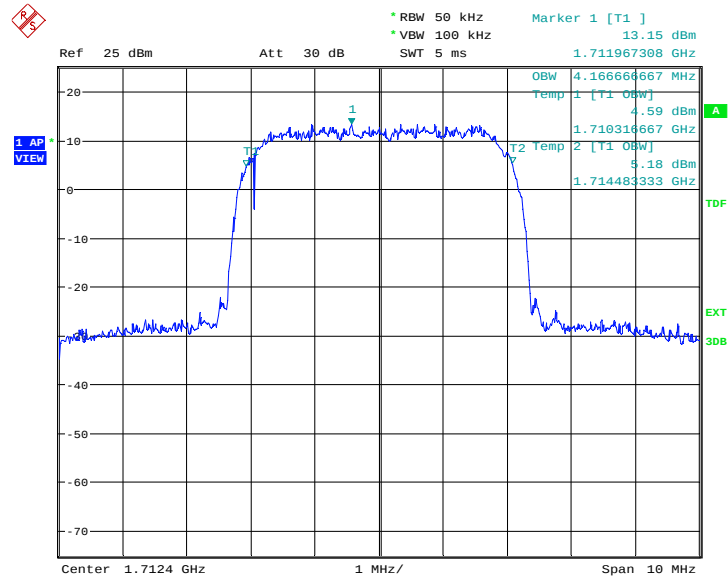

Date: 19.NOV.2013 09:24:13

Channel 1450-Occupied Bandwidth (99% BW)

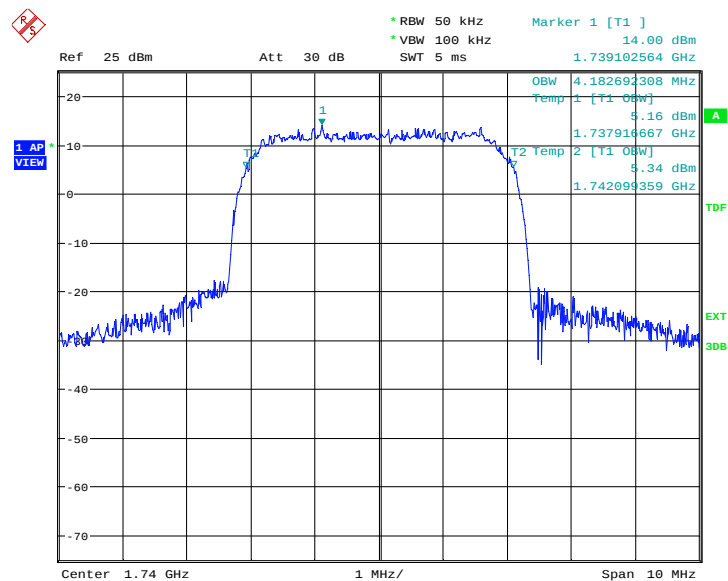

Date: 19.NOV.2013 09:24:47

* RBW 50 kHz
 * VBW 100 kHz
 SWT 5 ms

Ref 25 dBm
 Att 30 dB

Marker 1 [T1]
 14.01 dBm
 1.751622436 GHz

OBW 4.166666667 MHz
 Temp 1 [T1 OBW]
 5.33 dBm
 1.750516667 GHz
 T2 Temp 2 [T1 OBW]
 5.00 dBm
 1.754683333 GHz

1 AP VIEW

Center 1.7526 GHz
 1 MHz/
 Span 10 MHz


Date: 19.NOV.2013 09:25:21

WCDMA Band V(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
826.4	4.183
836.6	4.215
846.6	4.167


WCDMA Band V

Channel 4132-Occupied Bandwidth (99% BW)

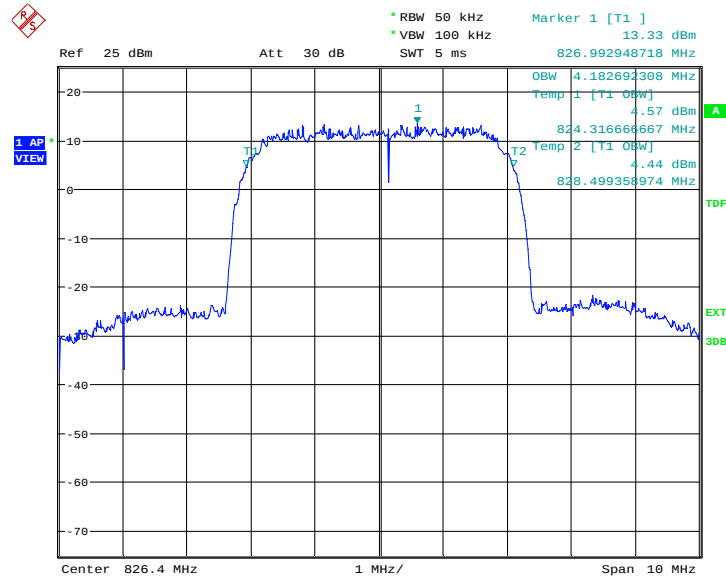


Date: 19.NOV.2013 09:42:20

Channel 4183-Occupied Bandwidth (99% BW)

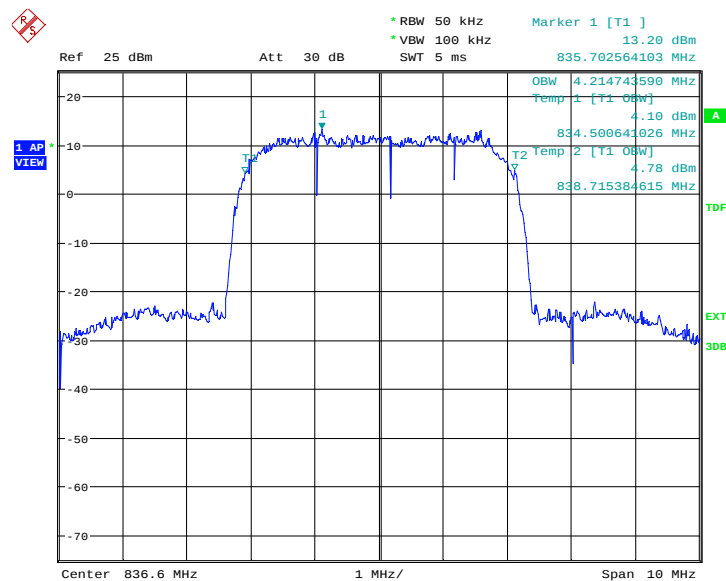

Date: 19.NOV.2013 09:42:54

Channel 4233-Occupied Bandwidth (99% BW)

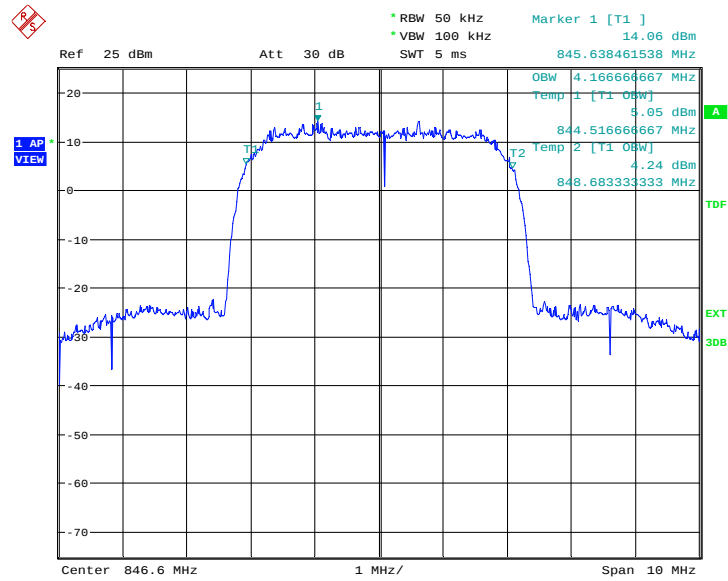

Date: 19.NOV.2013 09:43:28

A.6 EMISSION BANDWIDTH

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the WCDMA Band II, WCDMA Band IV and WCDMA Band V. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band II(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(MHz)
1852.4	4.471
1880.0	4.471
1907.6	4.471


WCDMA Band II

Channel 9262-Emission Bandwidth (100% BW)

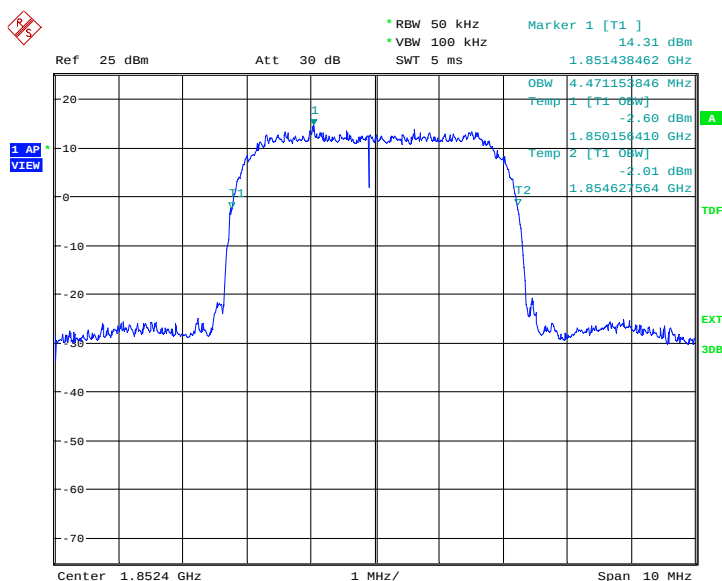


Date: 18.NOV.2013 16:28:29

Channel 9400-Emission Bandwidth (100% BW)

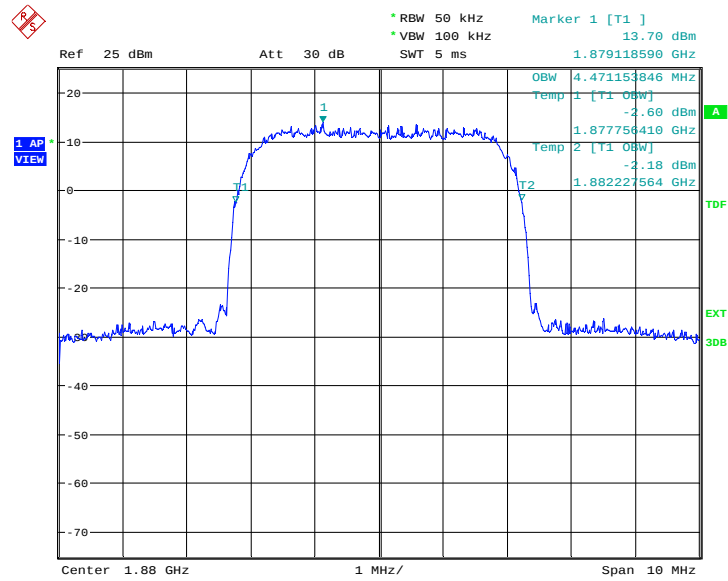

Date: 18.NOV.2013 16:29:03

Channel 9538-Emission Bandwidth (100% BW)

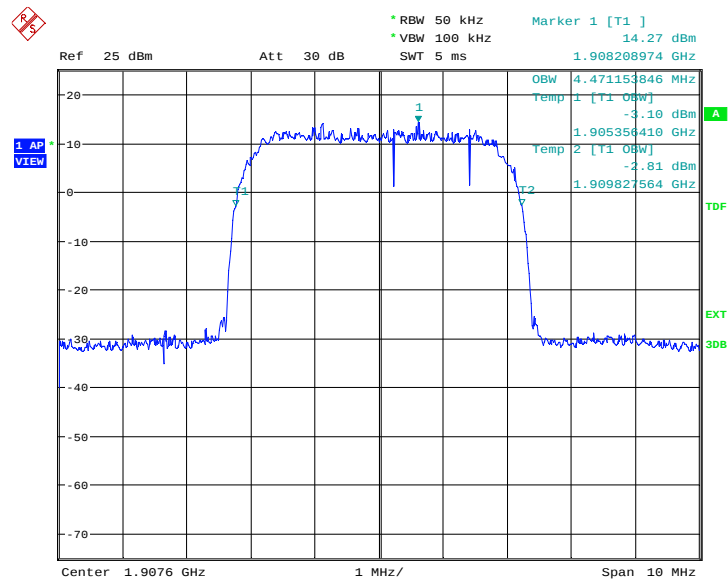


Date: 18.NOV.2013 16:29:37

WCDMA Band IV(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(MHz)
1712.4	4.471
1740	4.471
1752.6	4.455


WCDMA Band IV

Channel 1312-Emission Bandwidth (100% BW)

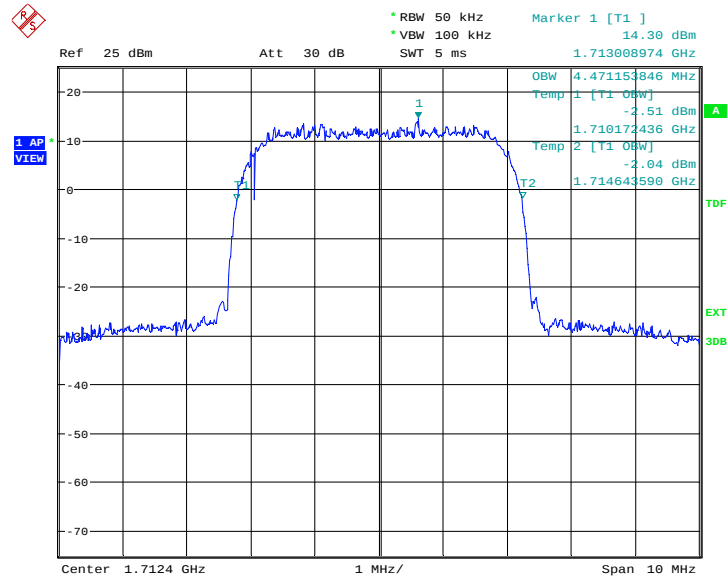


Date: 19.NOV.2013 09:25:56

Channel 1450-Emission Bandwidth (100% BW)

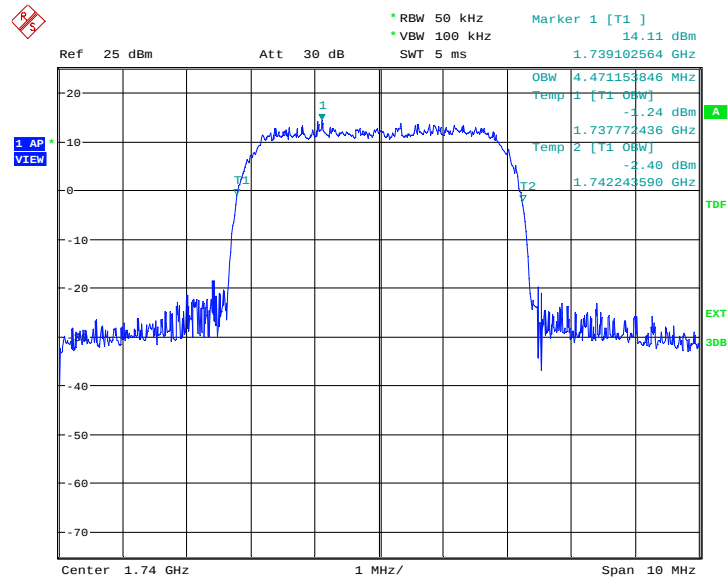

Date: 19.NOV.2013 09:26:30

Channel 1513-Emission Bandwidth (100% BW)

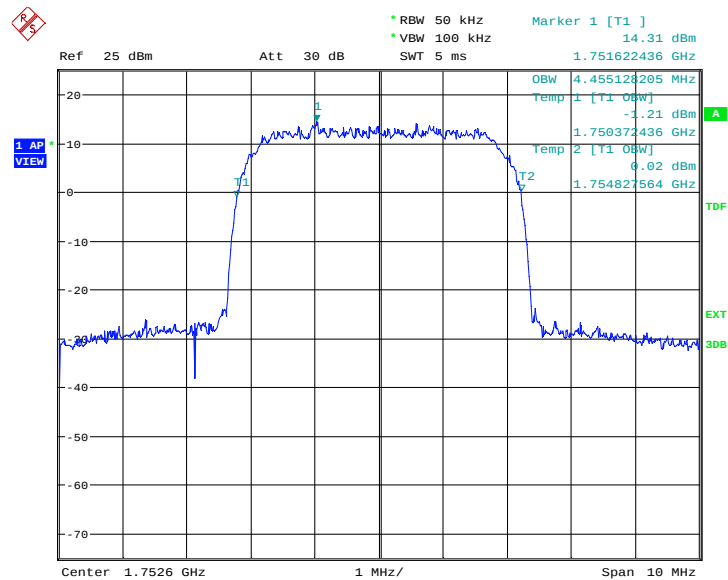


Date: 19.NOV.2013 09:27:04

WCDMA Band V(100% BW)

Frequency(MHz)	Emission Bandwidth (100% BW)(MHz)
826.40	4.503
836.60	4.487
846.60	4.487


WCDMA Band V

Channel 4132-Emission Bandwidth (100% BW)

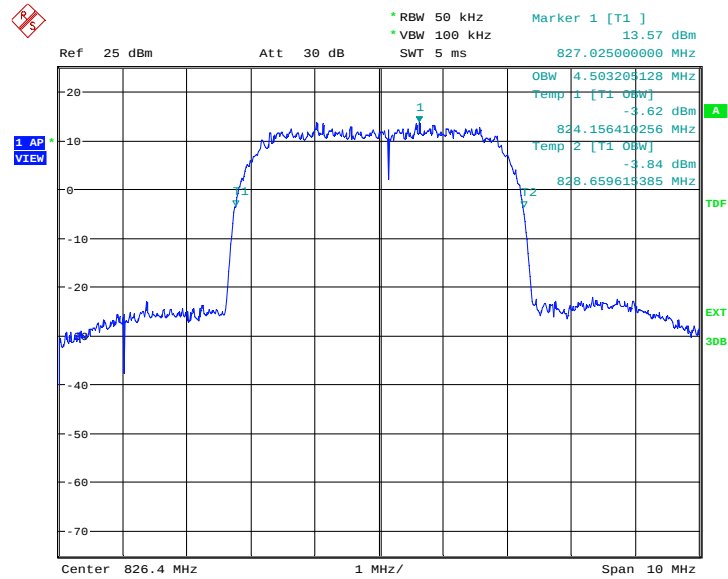


Date: 19.NOV.2013 09:44:03

Channel 4183-Emission Bandwidth (100% BW)

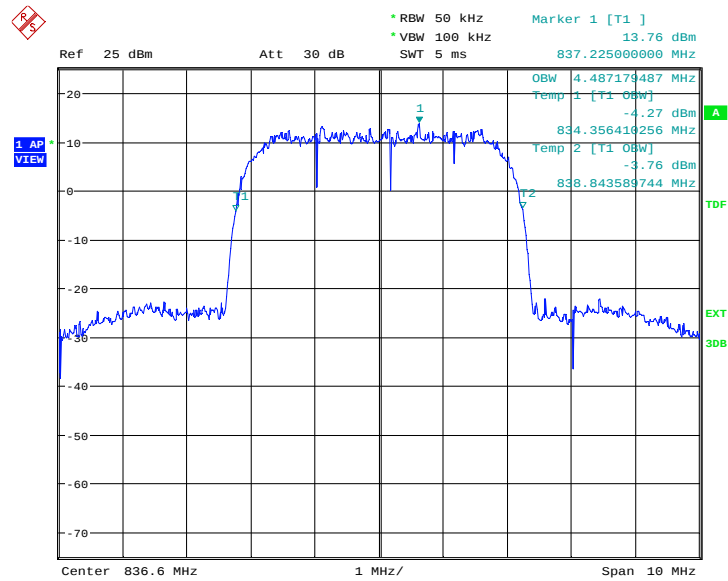

Date: 19.NOV.2013 09:44:37

Channel 4233-Emission Bandwidth (100% BW)

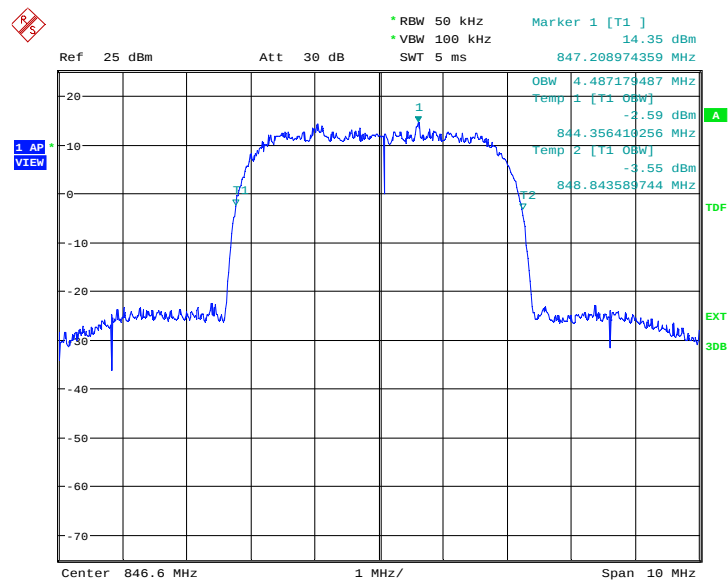


Date: 19.NOV.2013 09:45:11

A.7 BAND EDGE COMPLIANCE


WCDMA Band II

LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

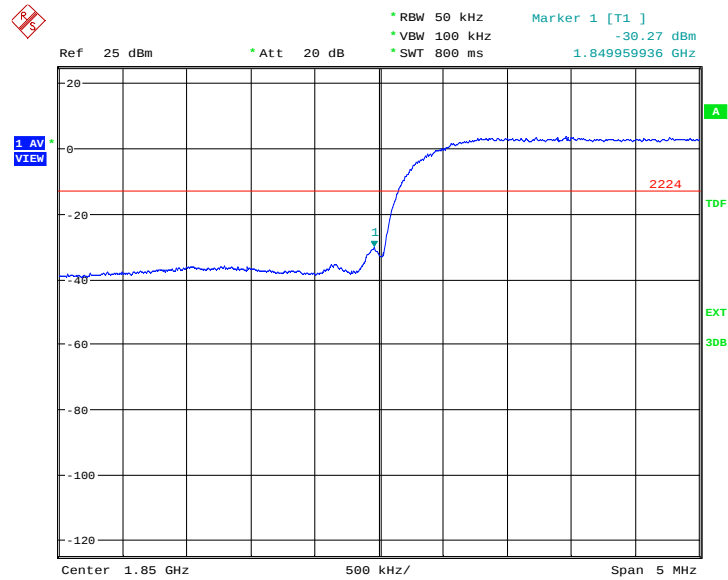

Date: 18.NOV.2013 16:29:52


HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

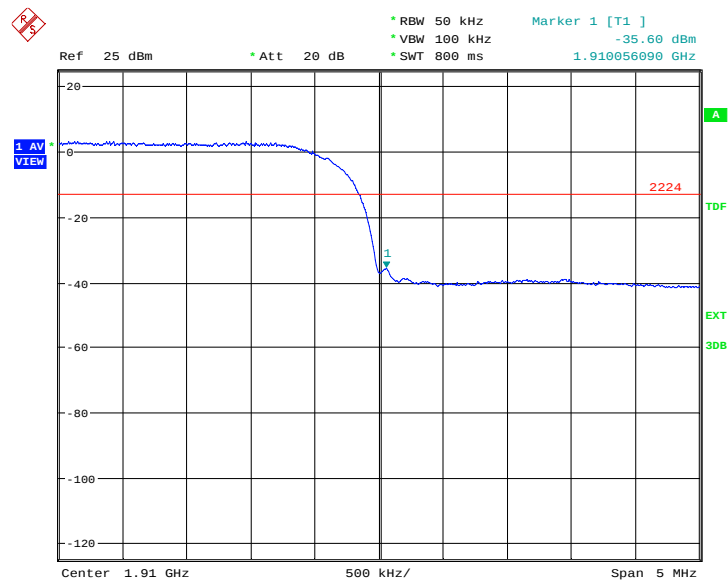

Date: 18.NOV.2013 16:30:07


WCDMA Band IV

LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312

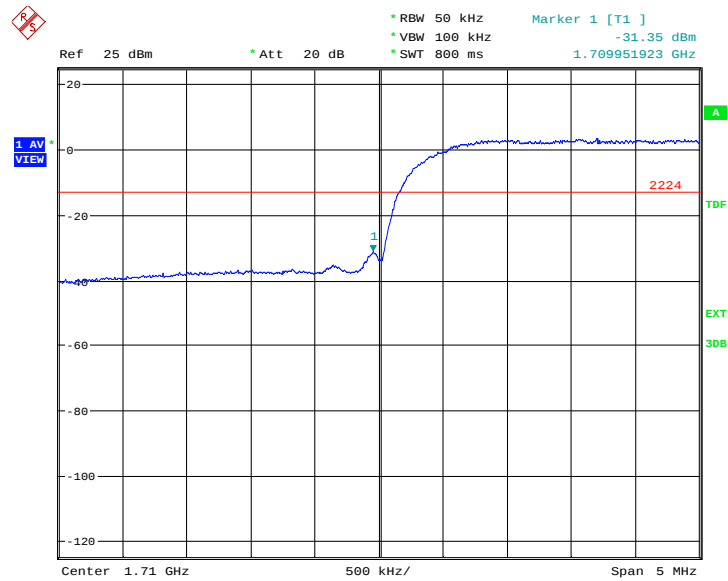

Date: 19.NOV.2013 09:27:19


HIGH BAND EDGE BLOCK-C (WCDMA Band IV) -Channel 1513

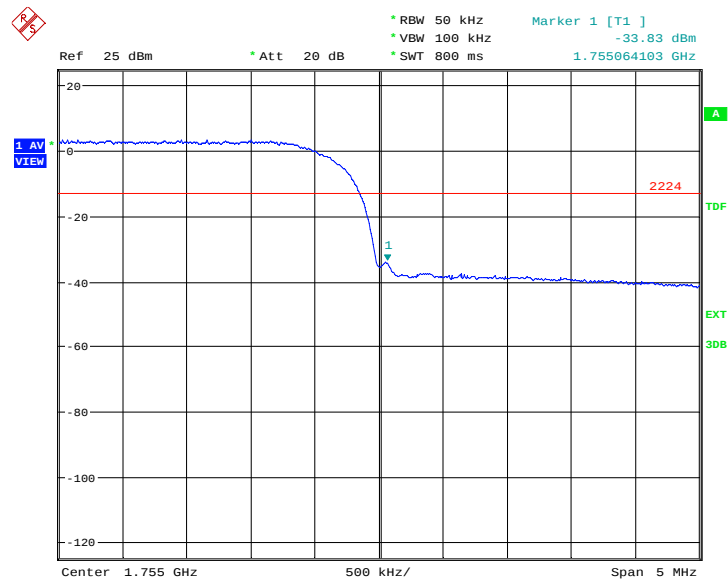

Date: 19.NOV.2013 09:27:33


WCDMA Band V

LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

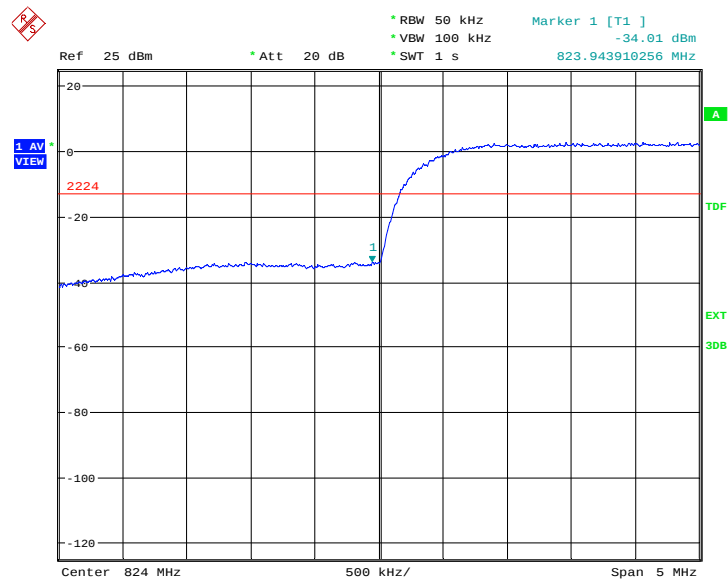

Date: 19.NOV.2013 09:45:26

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

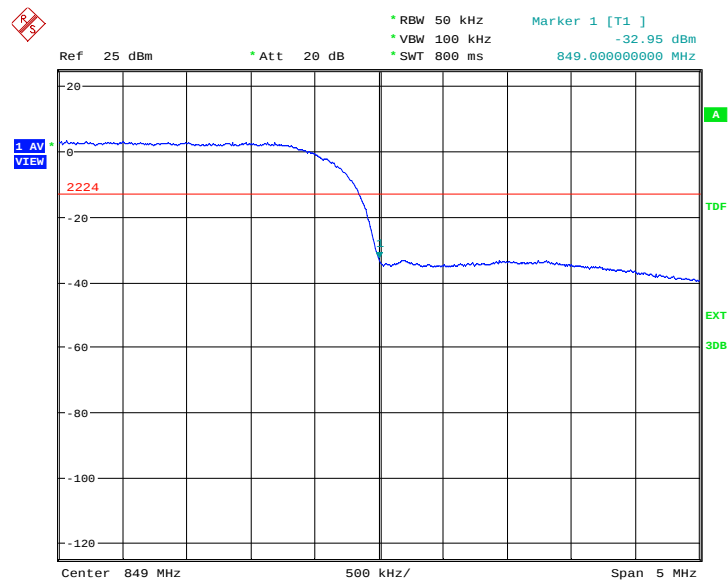

Date: 19.NOV.2013 09:45:40

A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 9KHz to 19.1 GHz, data taken from 9KHz to 20 GHz. For WCDMA Band IV, data taken from 9KHz to 20GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1450	1740.00
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 8.2 Measurement Limit

Part 24.238, Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the

specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3 Measurement result


Note:

The conducted spurious emission measurement over 9kHz - 30MHz had been investigated.
All spurious emissions were attenuated at least 20dB compared to the limit.

WCDMA Band II

A.8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

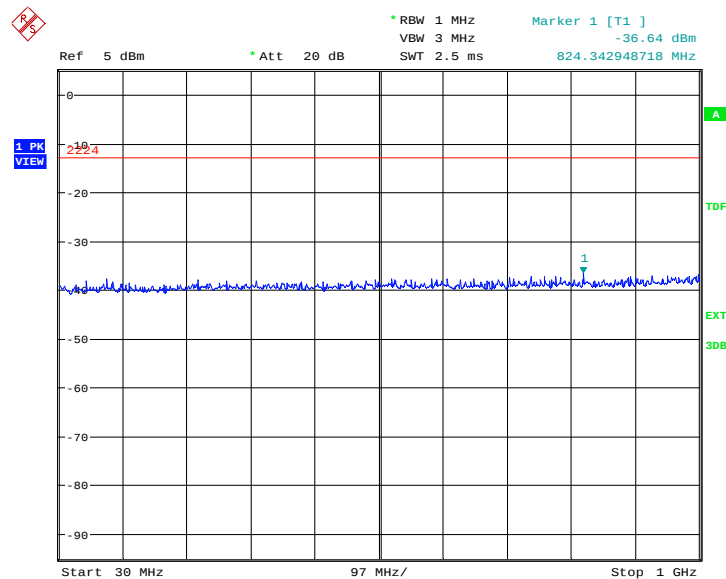


Date: 18.NOV.2013 16:30:37

A.8.3.2 Channel 9262: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

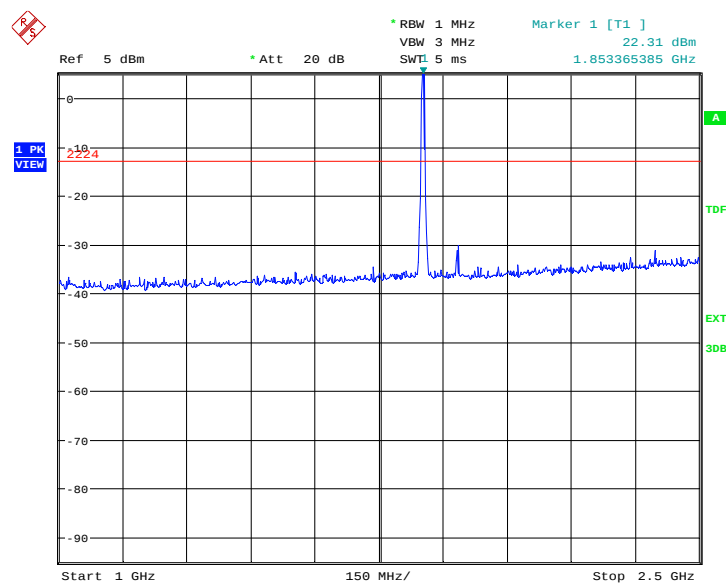

Date: 18.NOV.2013 16:31:04

A.8.3.3 Channel 9262: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

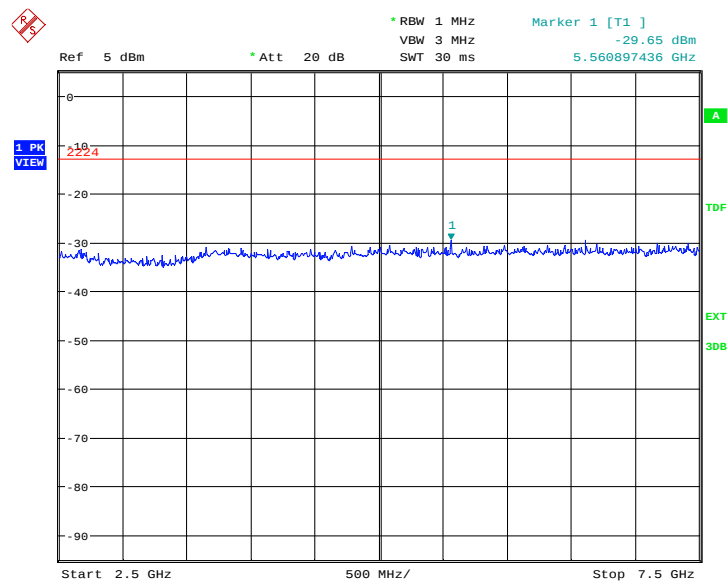

Date: 18.NOV.2013 16:31:31

A.8.3.4 Channel 9262: 7.5GHz -10GHz


Spurious emission limit -13dBm.

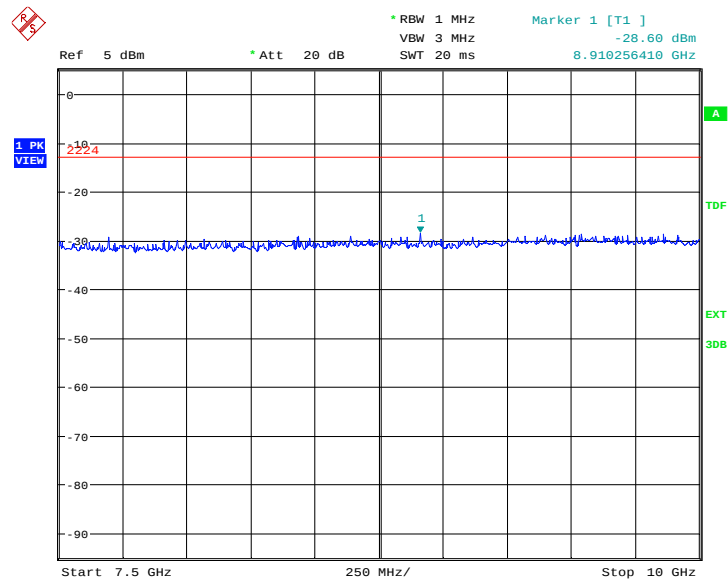

Date: 18.NOV.2013 16:31:58

A.8.3.5 Channel 9262: 10GHz –15GHz


Spurious emission limit –13dBm.

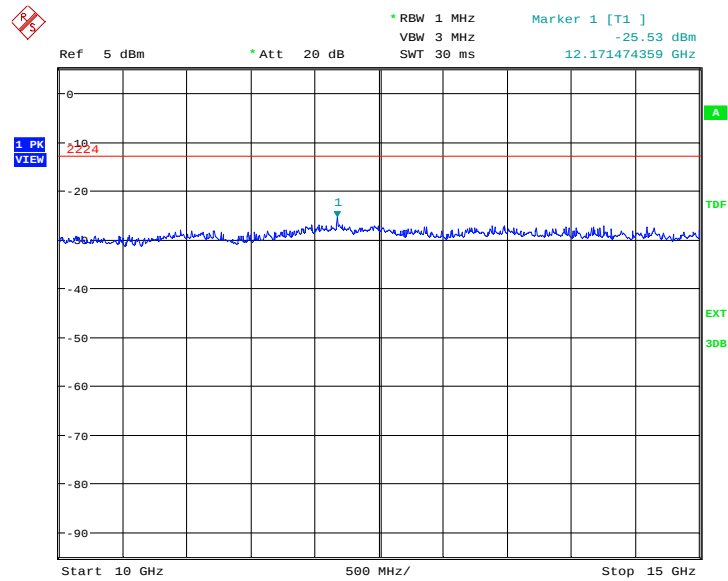

Date: 18.NOV.2013 16:32:25

A.8.3.6 Channel 9262: 15GHz –20GHz


Spurious emission limit –13dBm.

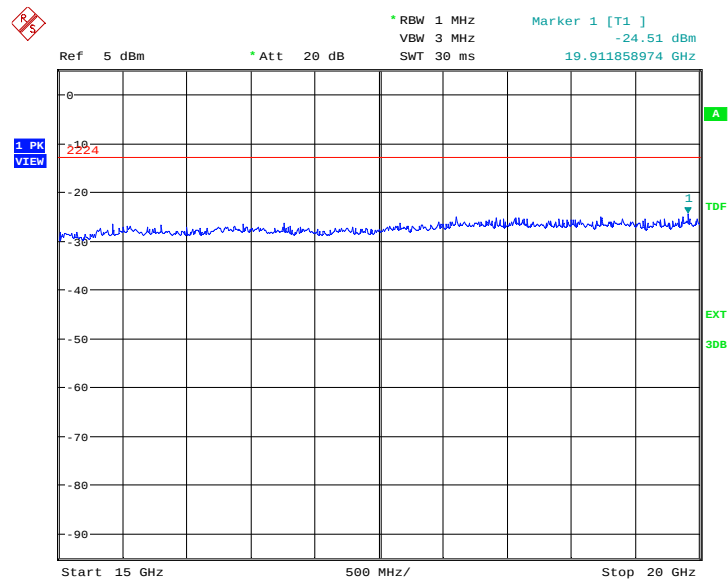

Date: 18.NOV.2013 16:32:52

A.8.3.7 Channel 9400: 30MHz –1GHz

Spurious emission limit –13dBm.

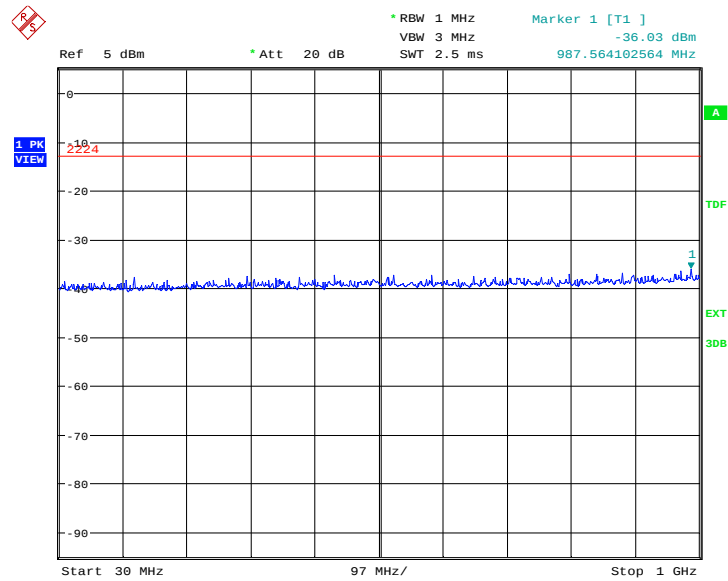


Date: 18.NOV.2013 16:33:22

A.8.3.8 Channel 9400: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

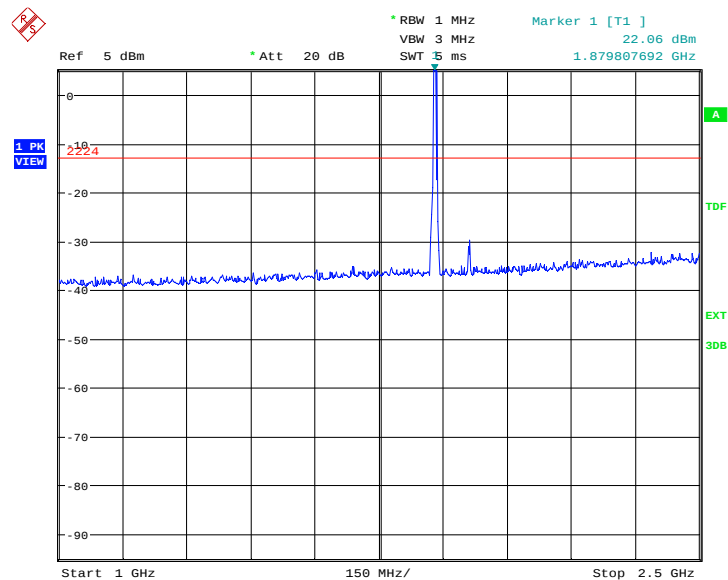

Date: 18.NOV.2013 16:33:49

A.8.3.9 Channel 9400: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

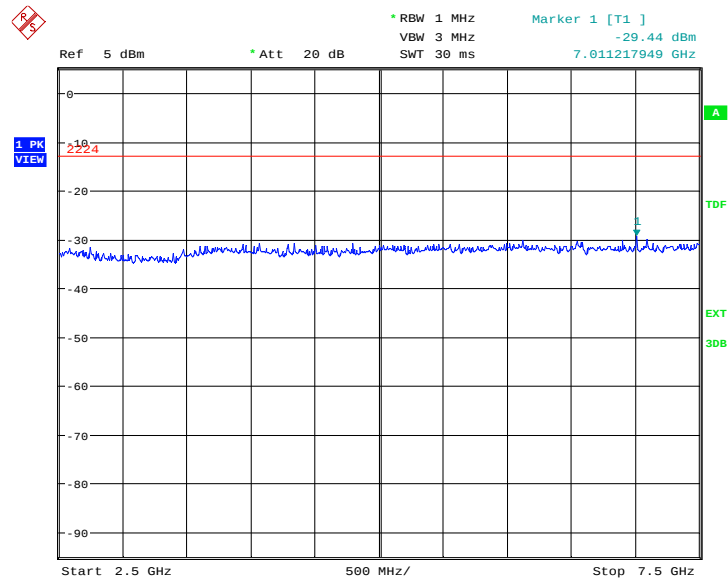

Date: 18.NOV.2013 16:34:16

A.8.3.10 Channel 9400: 7.5GHz –10GHz


Spurious emission limit –13dBm.

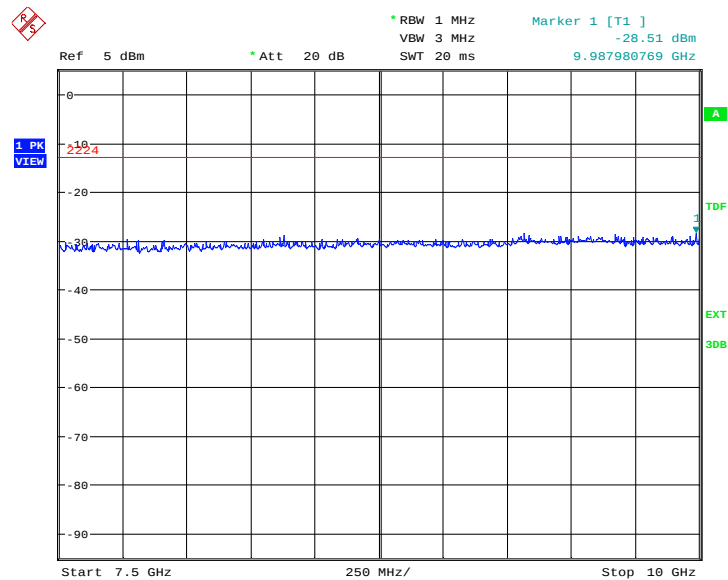

Date: 18.NOV.2013 16:34:43

A.8.3.11 Channel 9400: 10GHz –15GHz


Spurious emission limit –13dBm.

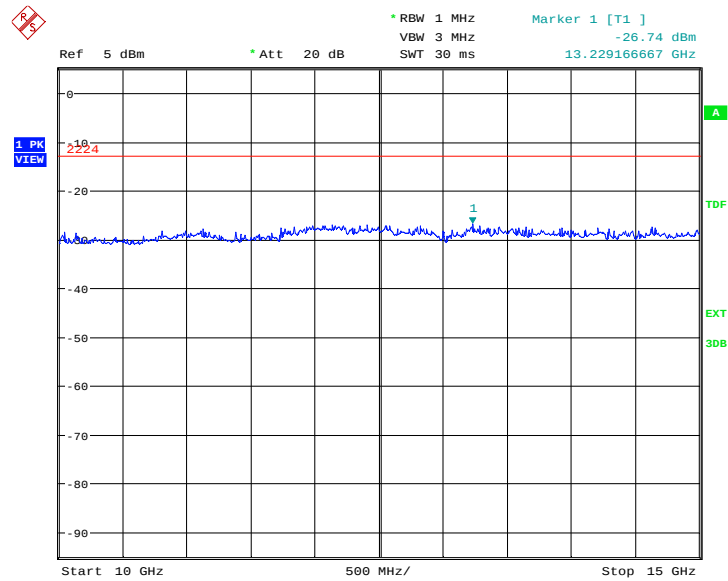

Date: 18.NOV.2013 16:35:10

A.8.3.12 Channel 9400: 15GHz –20GHz


Spurious emission limit –13dBm.

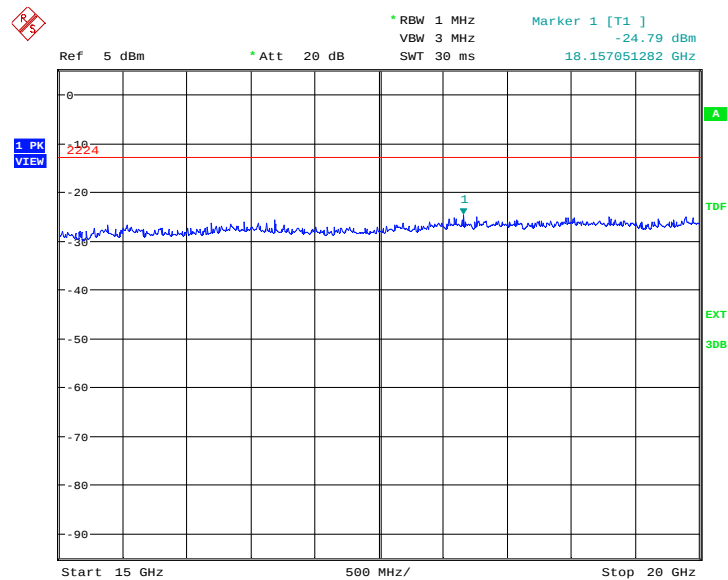

Date: 18.NOV.2013 16:35:37

A.8.3.13 Channel 9538: 30MHz –1GHz

Spurious emission limit –13dBm.

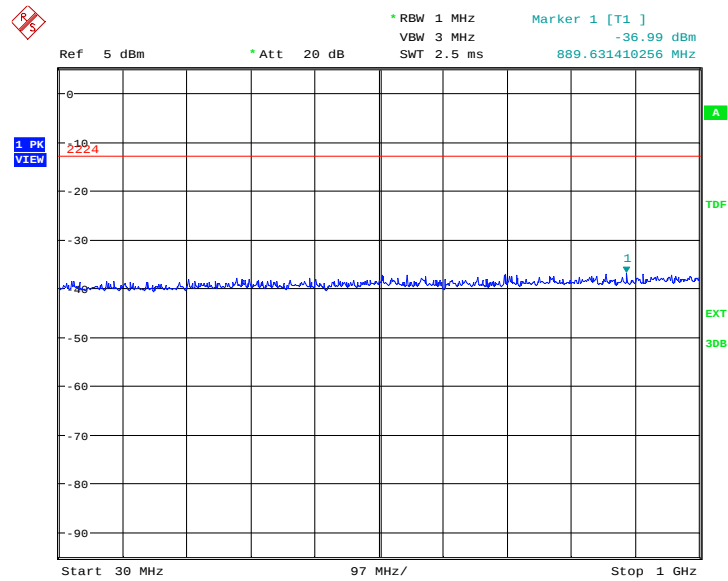


Date: 18.NOV.2013 16:36:07

A.8.3.14 Channel 9538: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

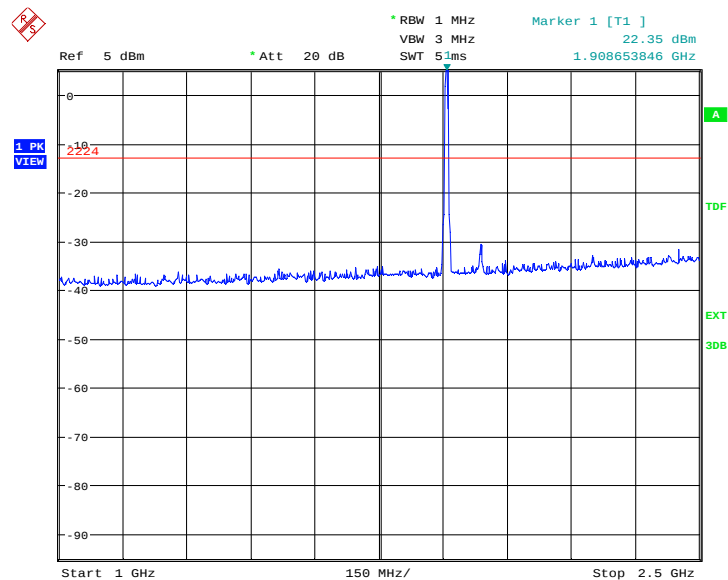

Date: 18.NOV.2013 16:36:34

A.8.3.15 Channel 9538: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

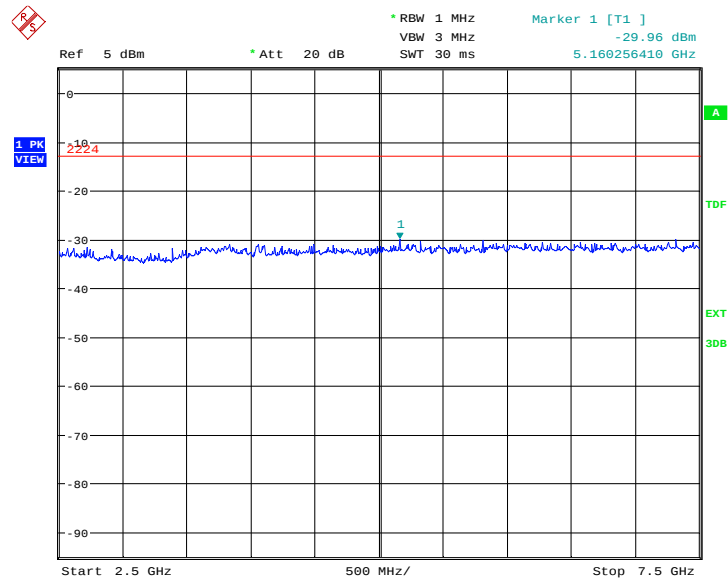

Date: 18.NOV.2013 16:37:01

A.8.3.16 Channel 9538: 7.5GHz –10GHz


Spurious emission limit –13dBm.

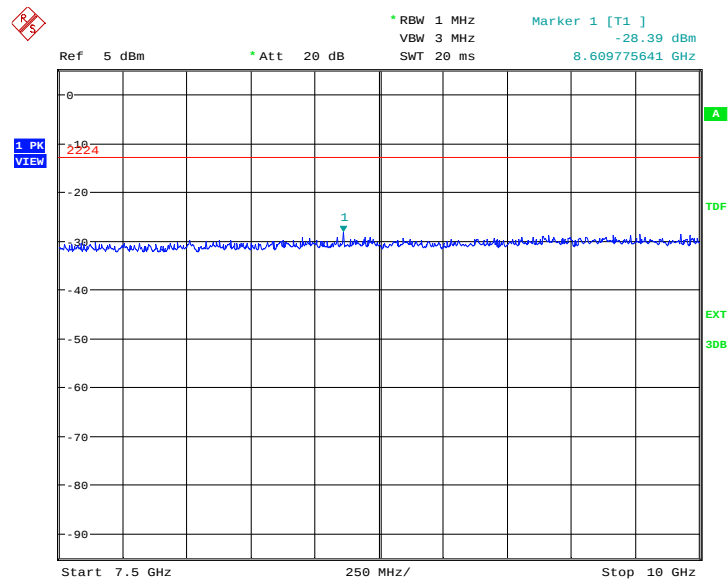

Date: 18.NOV.2013 16:37:28

A.8.3.17 Channel 9538: 10GHz –15GHz


Spurious emission limit –13dBm.

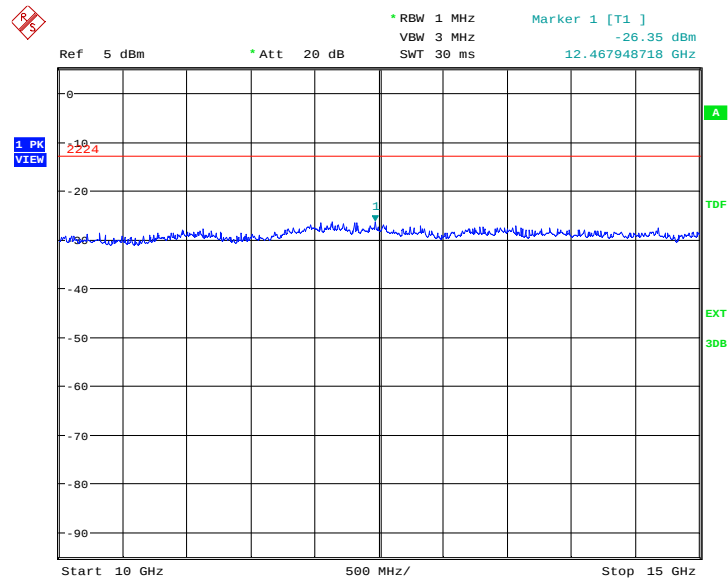

Date: 18.NOV.2013 16:37:55

A.8.3.18 Channel 9538: 15GHz –20GHz


Spurious emission limit –13dBm.

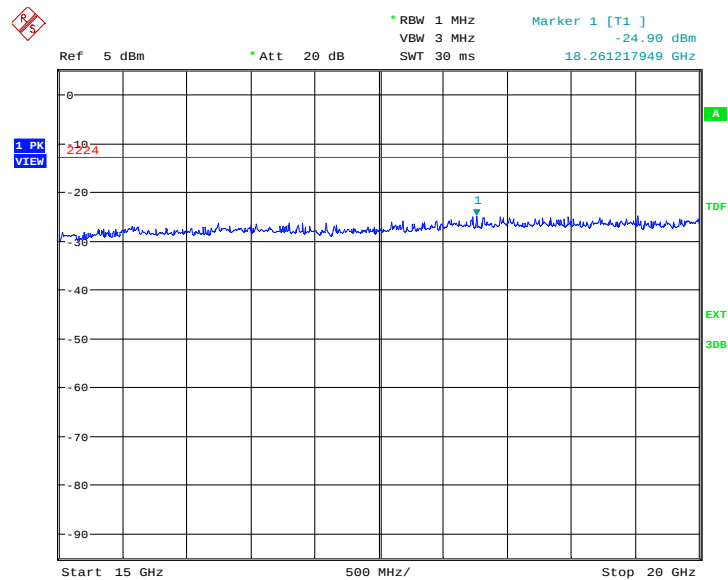

Date: 18.NOV.2013 16:38:22

A.8.3.19 Idle mode: 30MHz –1GHz


Spurious emission limit –13dBm.

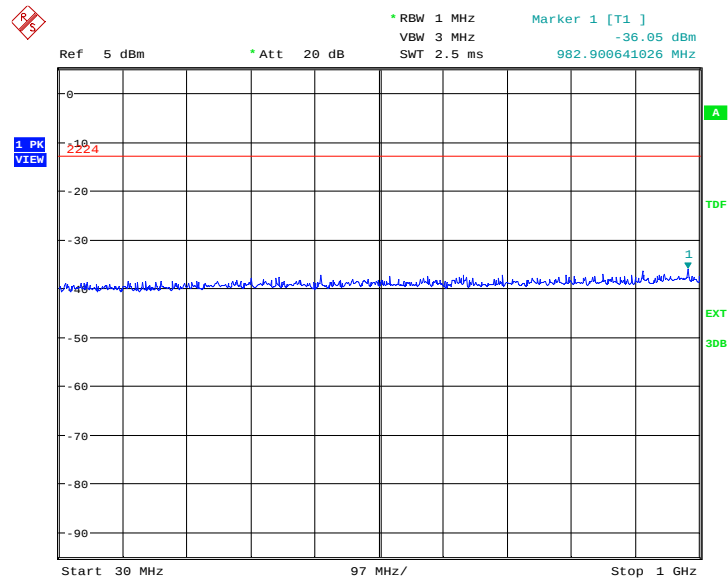

Date: 18.NOV.2013 16:38:50

A.8.3.20 Idle mode: 1GHz –2.5GHz


Spurious emission limit –13dBm.

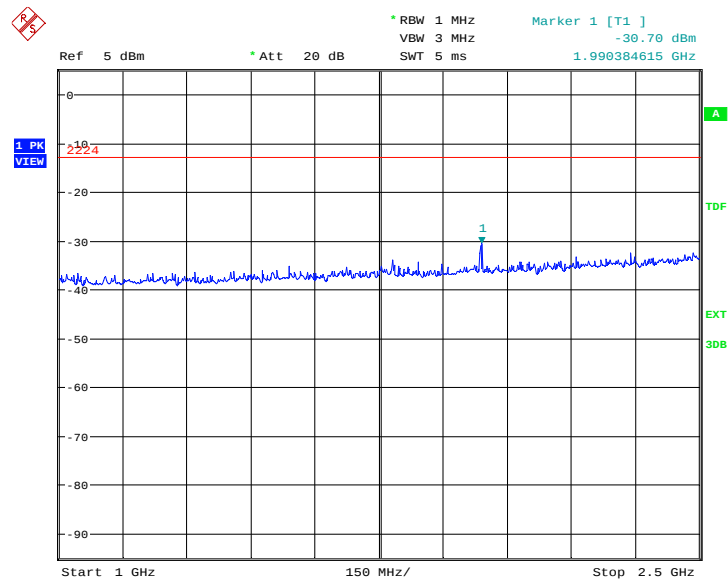

Date: 18.NOV.2013 16:39:17

A.8.3.21 Idle mode: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

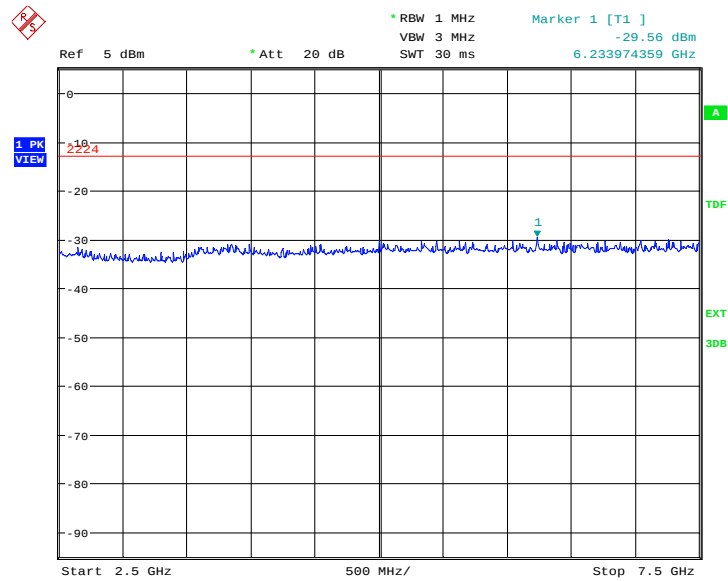

Date: 18.NOV.2013 16:39:44

A.8.3.22 Idle mode: 7.5GHz –10GHz


Spurious emission limit –13dBm.

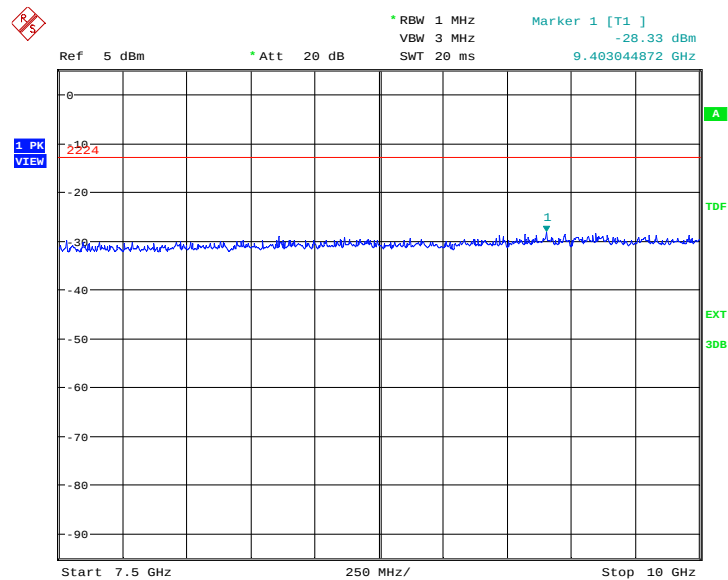

Date: 18.NOV.2013 16:40:11

A.8.3.23 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

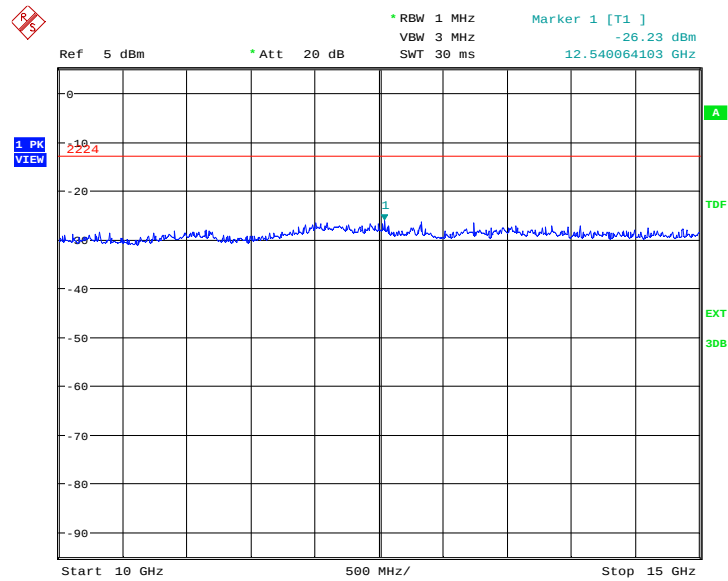

Date: 18.NOV.2013 16:40:38

A.8.3.24 Idle mode: 15GHz –20GHz

Spurious emission limit –13dBm.

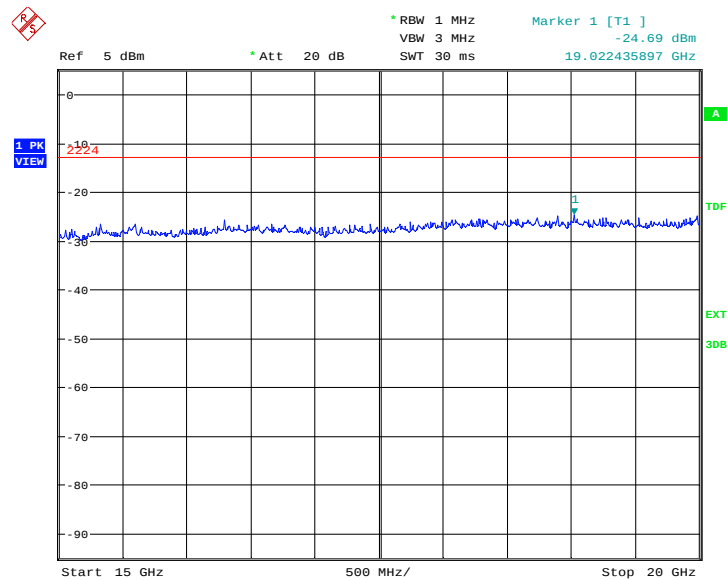


Date: 18.NOV.2013 16:41:05

WCDMA Band IV

A.8.3.25 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.

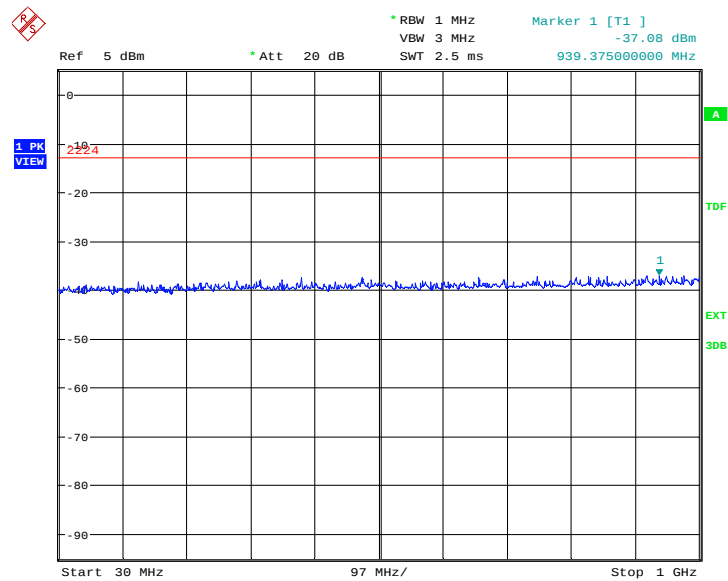


Date: 19.NOV.2013 09:28:03

A.8.3.26 Channel 1312: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

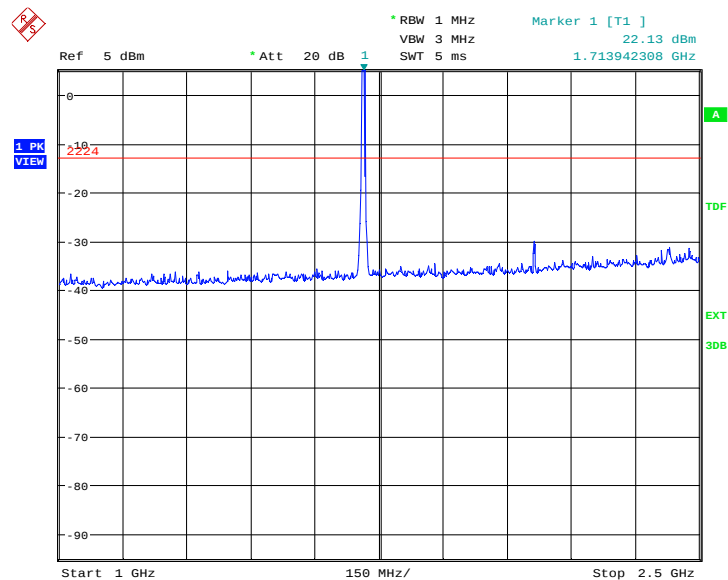

Date: 19.NOV.2013 09:28:30

A.8.3.27 Channel 1312: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

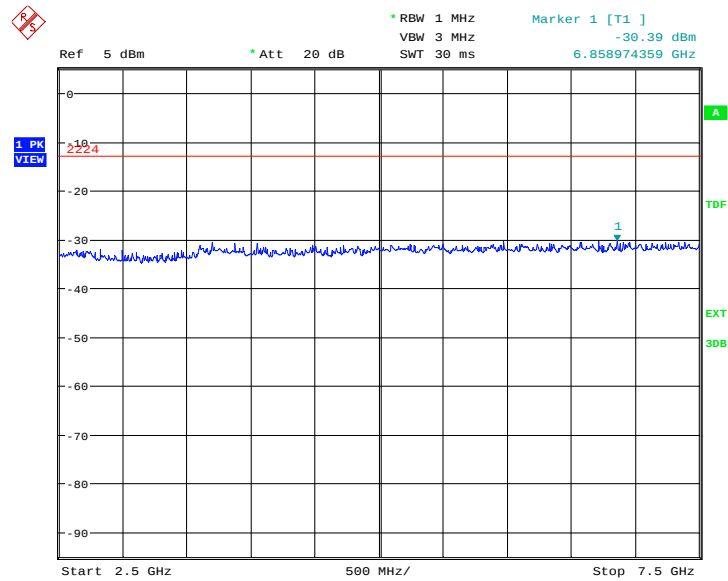

Date: 19.NOV.2013 09:28:57

A.8.3.28 Channel 1312: 7.5GHz –10GHz


Spurious emission limit –13dBm.

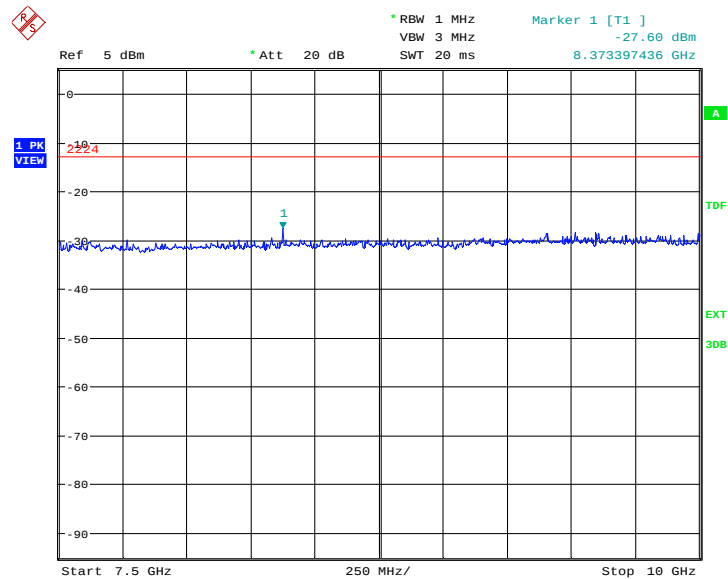

Date: 19.NOV.2013 09:29:24

A.8.3.29 Channel 1312: 10GHz –15GHz


Spurious emission limit –13dBm.

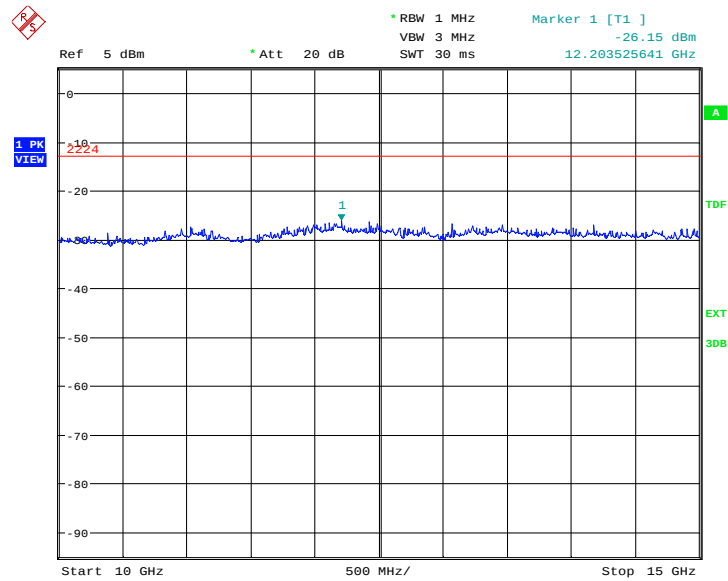

Date: 19.NOV.2013 09:29:51

A.8.3.30 Channel 1312: 15GHz –20GHz


Spurious emission limit –13dBm.

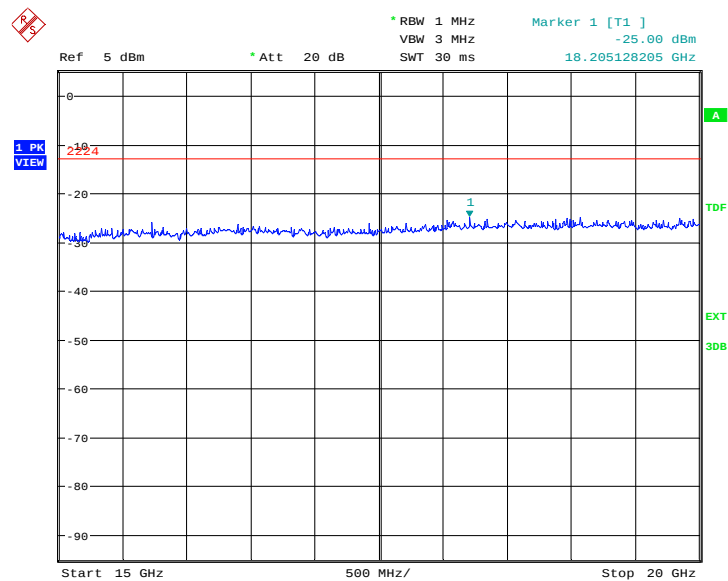

Date: 19.NOV.2013 09:30:19

A.8.3.31 Channel 1450: 30MHz –1GHz

Spurious emission limit –13dBm.

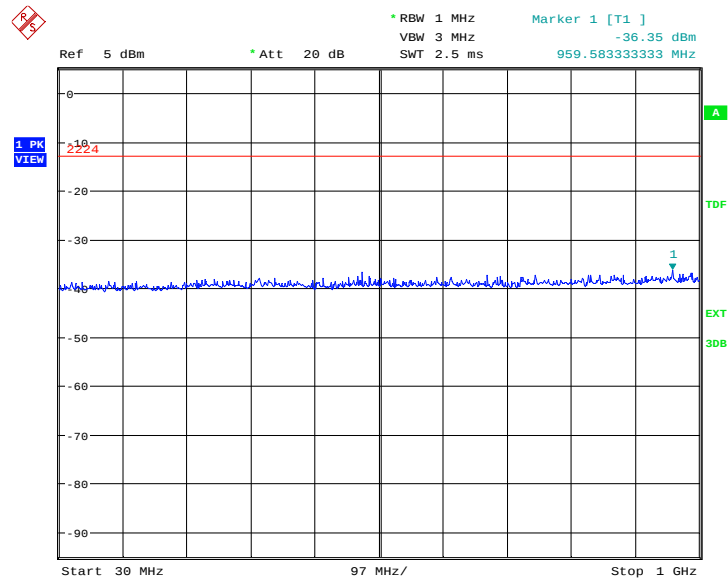


Date: 19.NOV.2013 09:30:48

A.8.3.32 Channel 1450: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

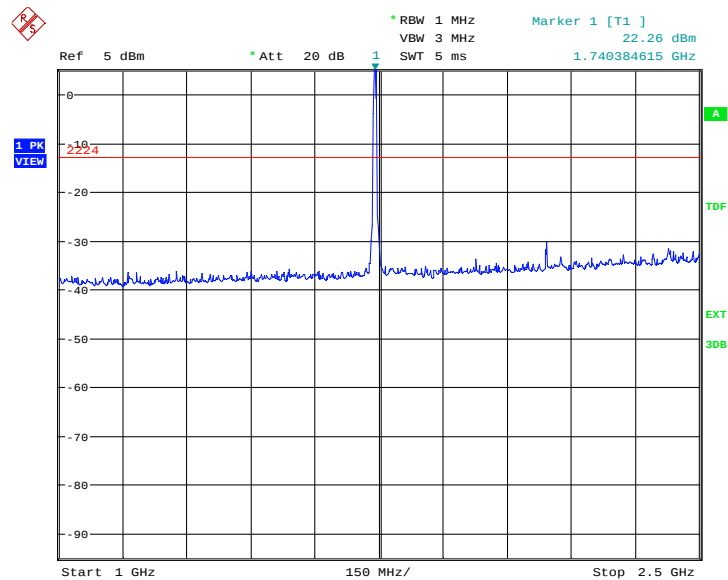

Date: 19.NOV.2013 09:31:15

A.8.3.33 Channel 1450: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

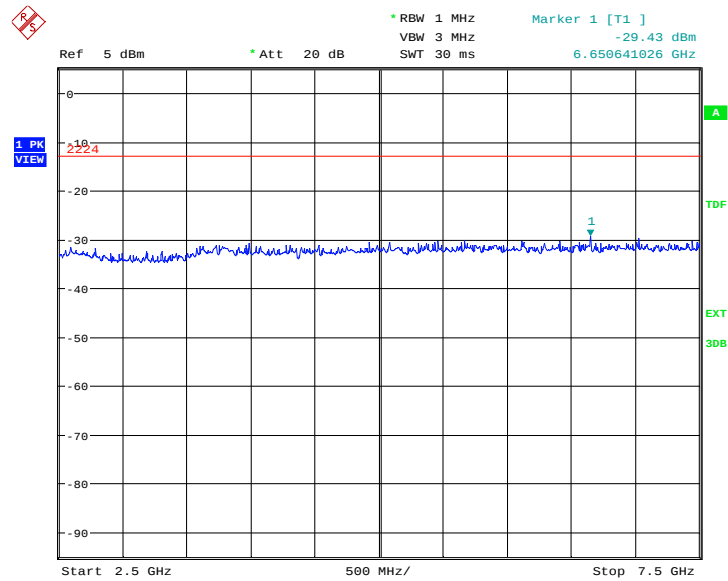

Date: 19.NOV.2013 09:31:42

A.8.3.34 Channel 1450: 7.5GHz –10GHz


Spurious emission limit –13dBm.

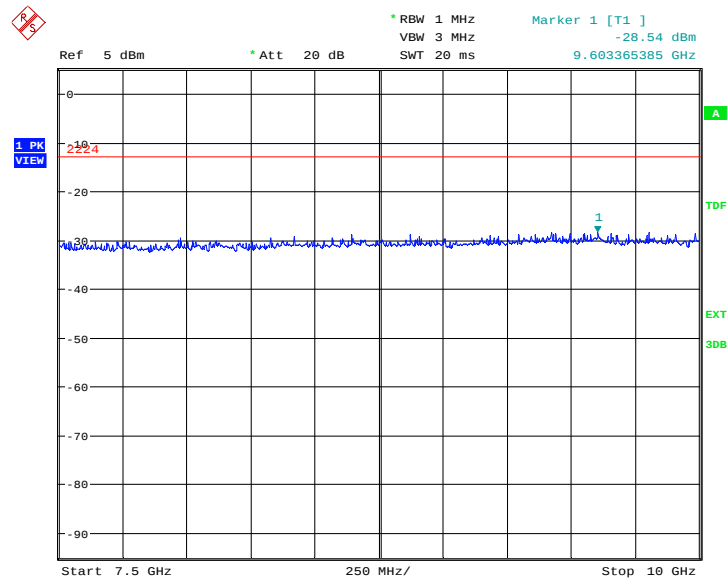

Date: 19.NOV.2013 09:32:09

A.8.3.35 Channel 1450: 10GHz –15GHz


Spurious emission limit –13dBm.

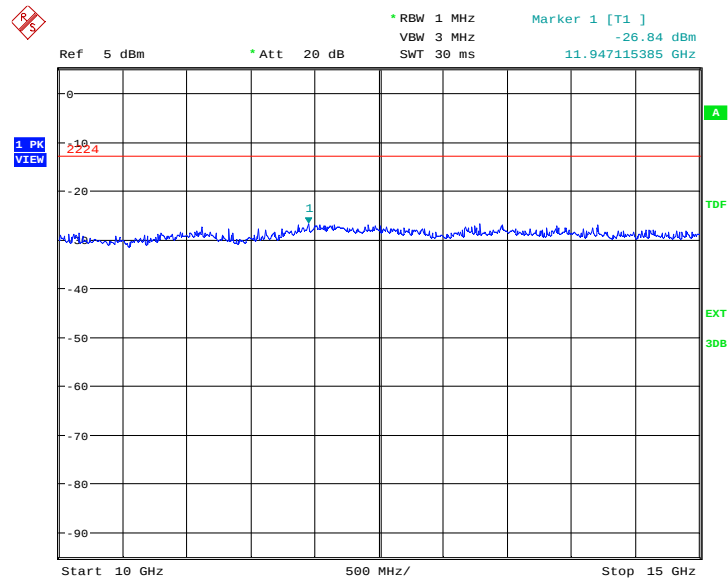

Date: 19.NOV.2013 09:32:36

A.8.3.36 Channel 1450: 15GHz –20GHz


Spurious emission limit –13dBm.

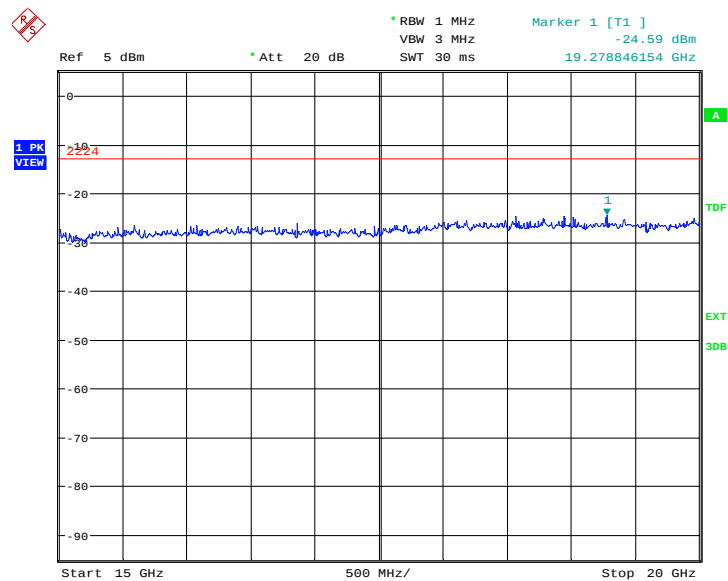

Date: 19.NOV.2013 09:33:04

A.8.3.37 Channel 1513: 30MHz –1GHz

Spurious emission limit –13dBm.

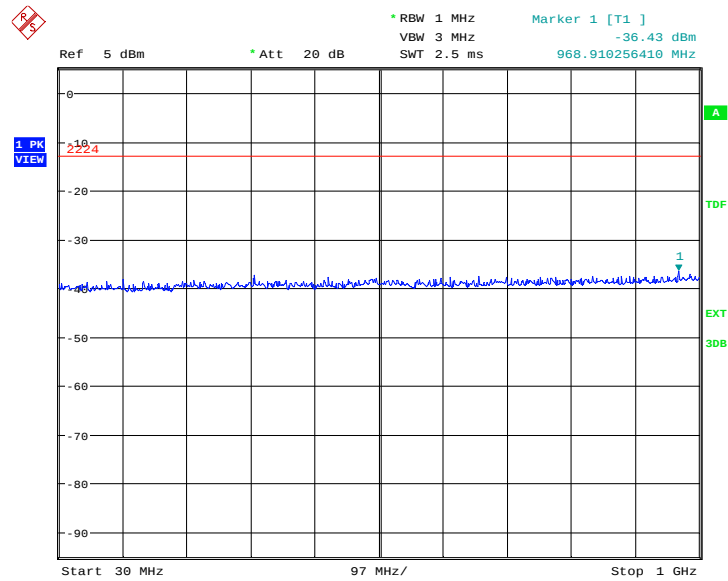


Date: 19.NOV.2013 09:33:33

A.8.3.38 Channel 1513: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

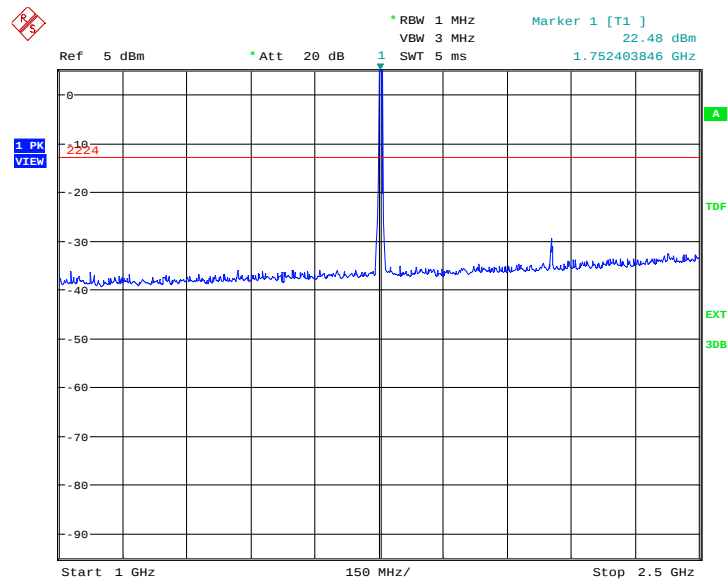

Date: 19.NOV.2013 09:34:00

A.8.3.39 Channel 1513: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

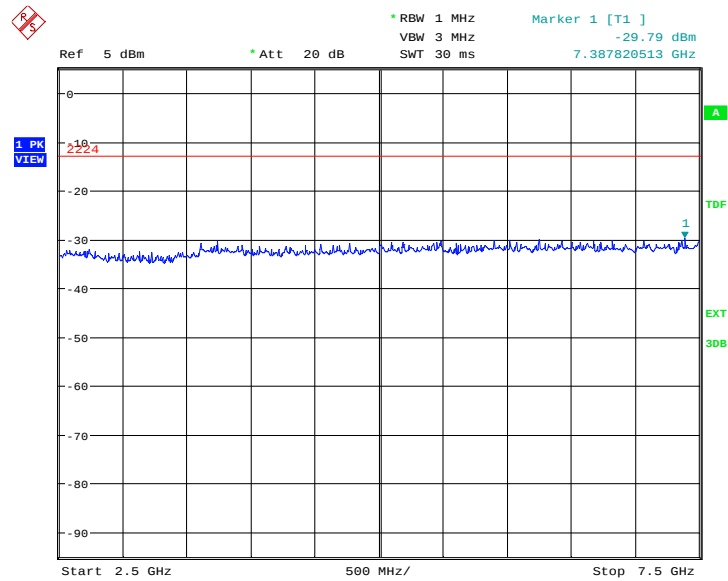

Date: 19.NOV.2013 09:34:27

A.8.3.40 Channel 1513: 7.5GHz –10GHz


Spurious emission limit –13dBm.

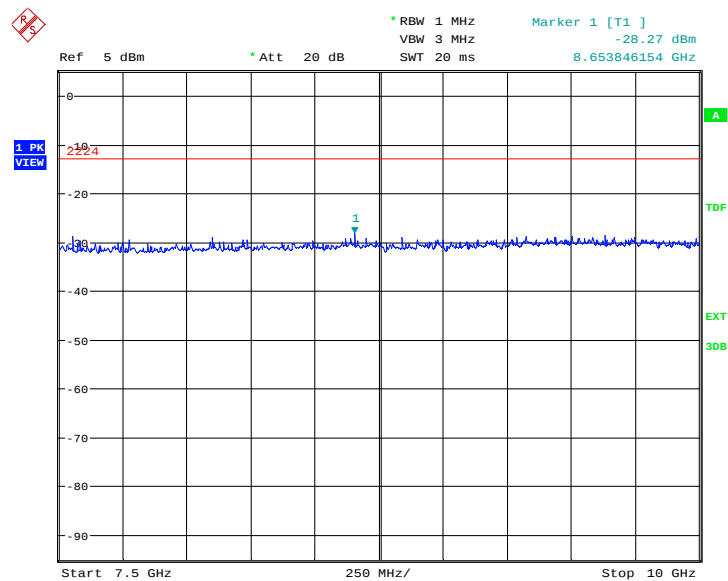

Date: 19.NOV.2013 09:34:54

A.8.3.41 Channel 1513: 10GHz –15GHz


Spurious emission limit –13dBm.

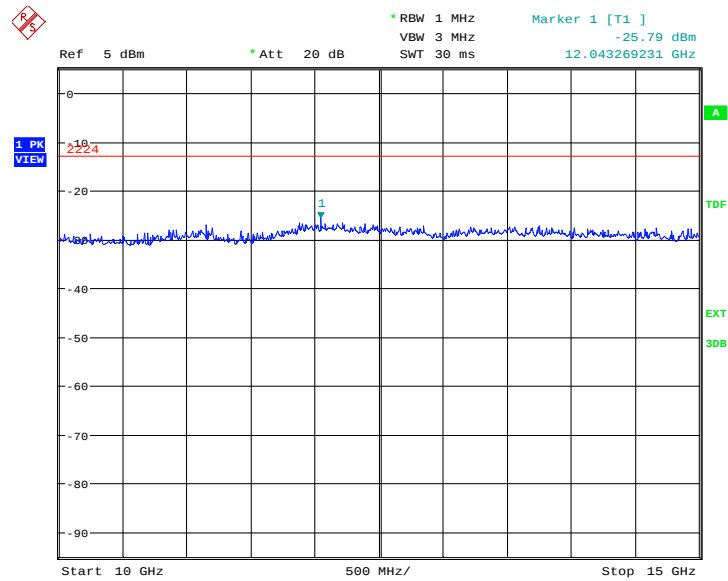

Date: 19.NOV.2013 09:35:21

A.8.3.42 Channel 1513: 15GHz –20GHz


Spurious emission limit –13dBm.

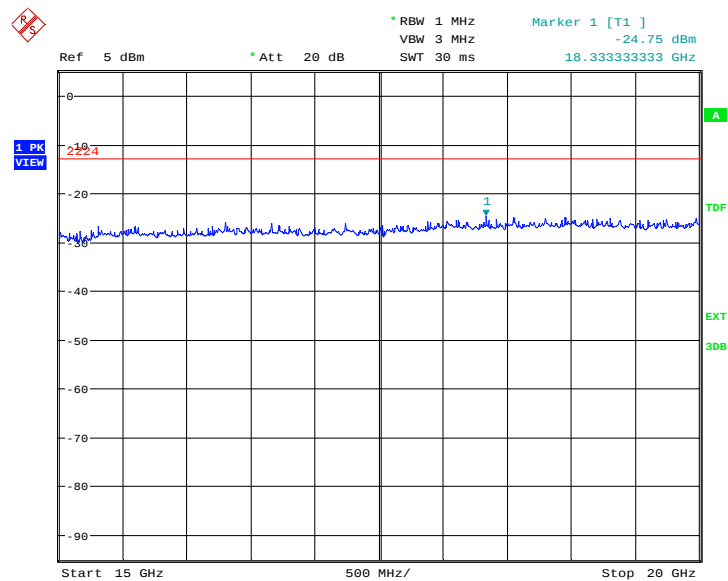

Date: 19.NOV.2013 09:35:49

A.8.3.43 Idle mode: 30MHz –1GHz


Spurious emission limit –13dBm.

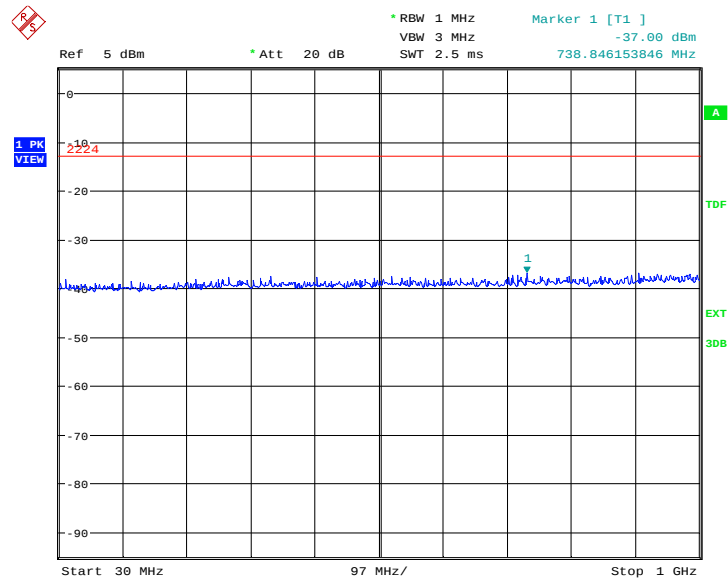

Date: 19.NOV.2013 09:36:16

A.8.3.44 Idle mode: 1GHz –2.5GHz


Spurious emission limit –13dBm.

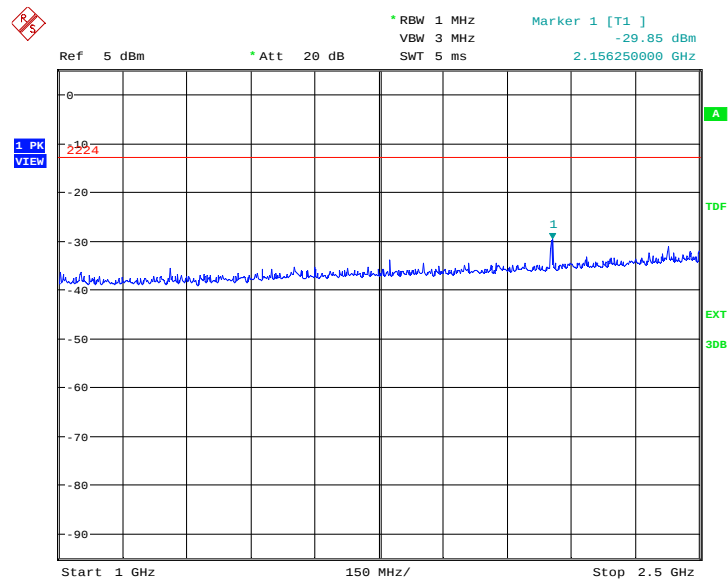

Date: 19.NOV.2013 09:36:43

A.8.3.45 Idle mode: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

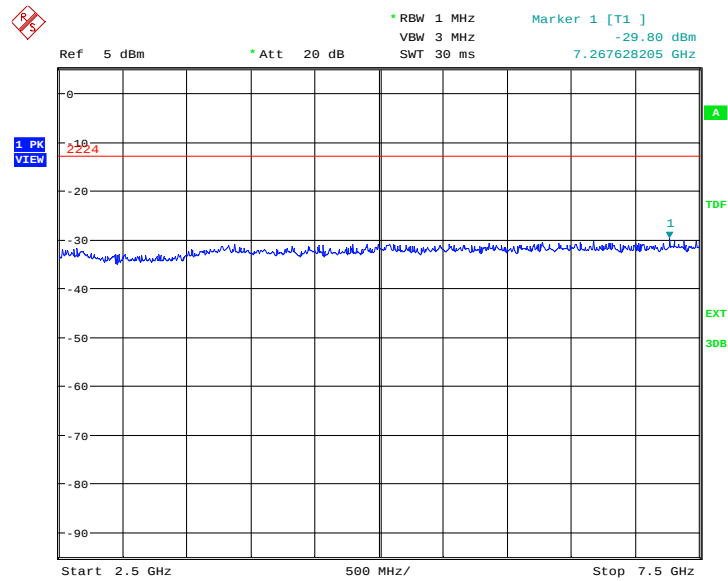

Date: 19.NOV.2013 09:37:10

A.8.3.46 Idle mode: 7.5GHz –10GHz


Spurious emission limit –13dBm.

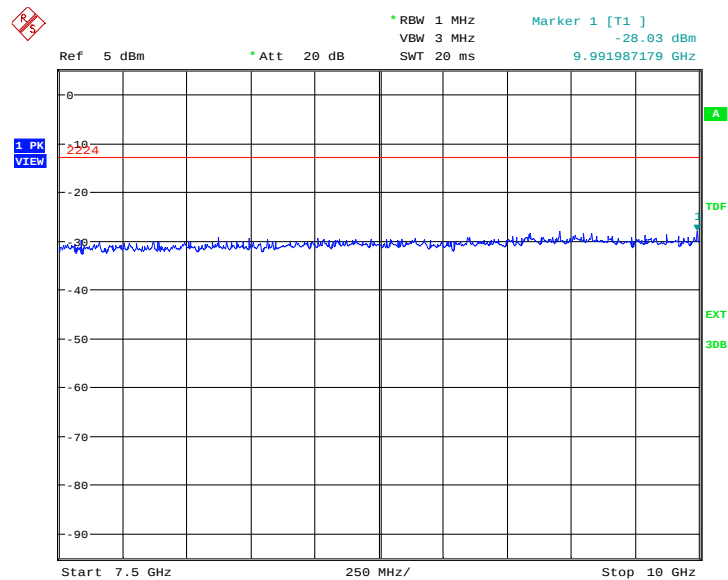

Date: 19.NOV.2013 09:37:37

A.8.3.47 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

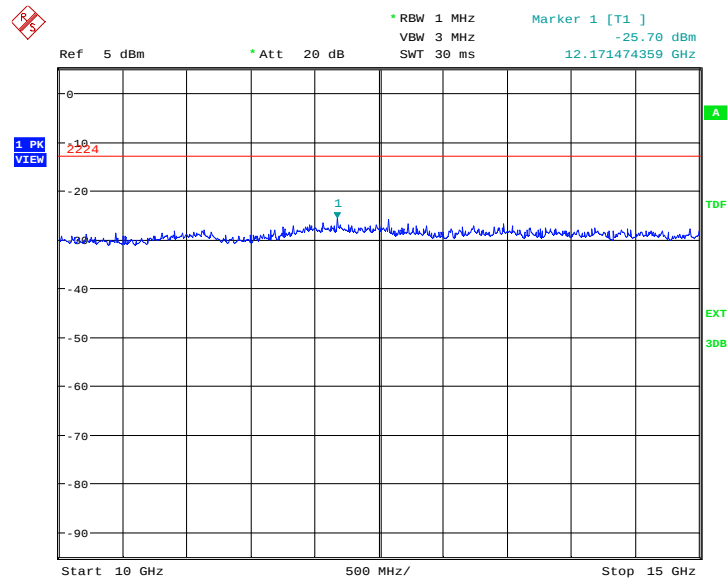

Date: 19.NOV.2013 09:38:04

A.8.3.48 Idle mode: 15GHz –20GHz

Spurious emission limit –13dBm.

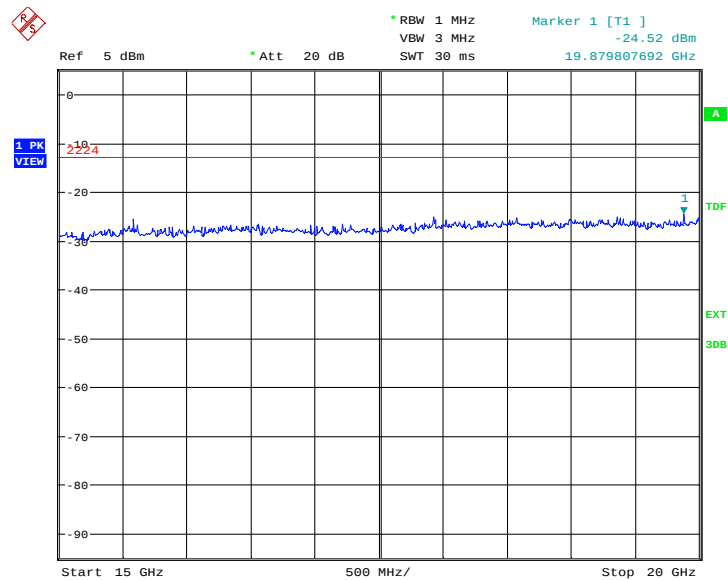


Date: 19.NOV.2013 09:38:31

WCDMA Band V

A.8.3.49 Channel 4132: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

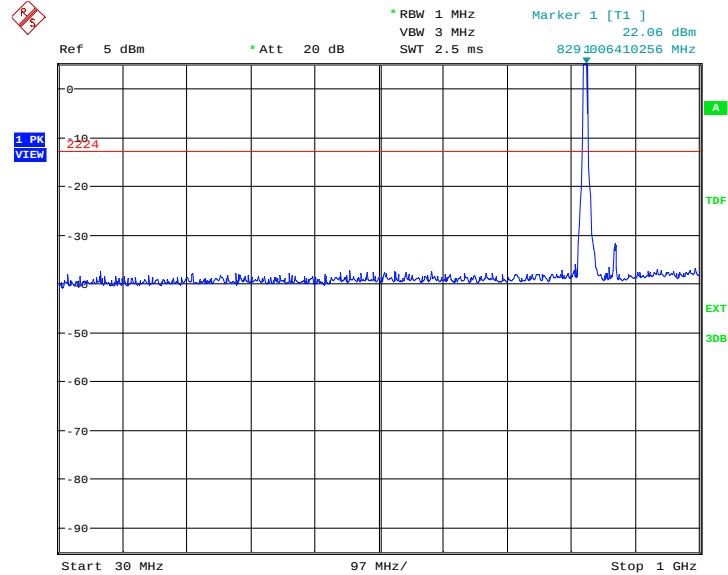

Date: 19.NOV.2013 09:46:10

A.8.3.50 Channel 4132: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

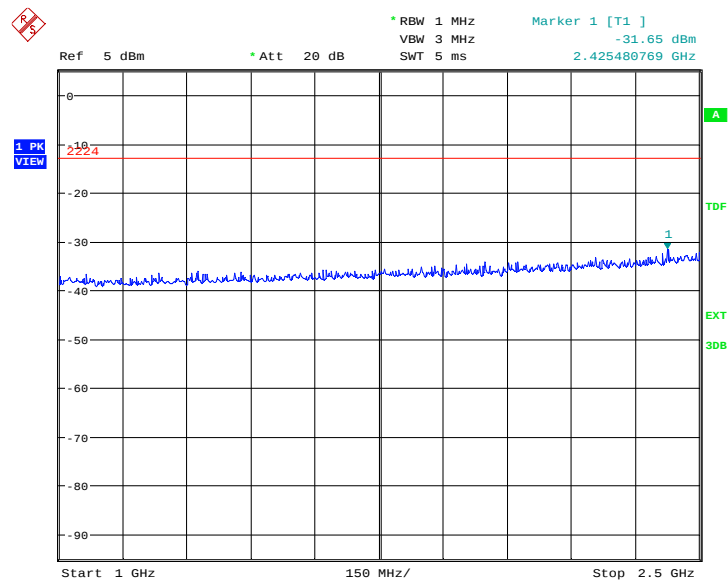

Date: 19.NOV.2013 09:46:37

A.8.3.51 Channel 4132: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

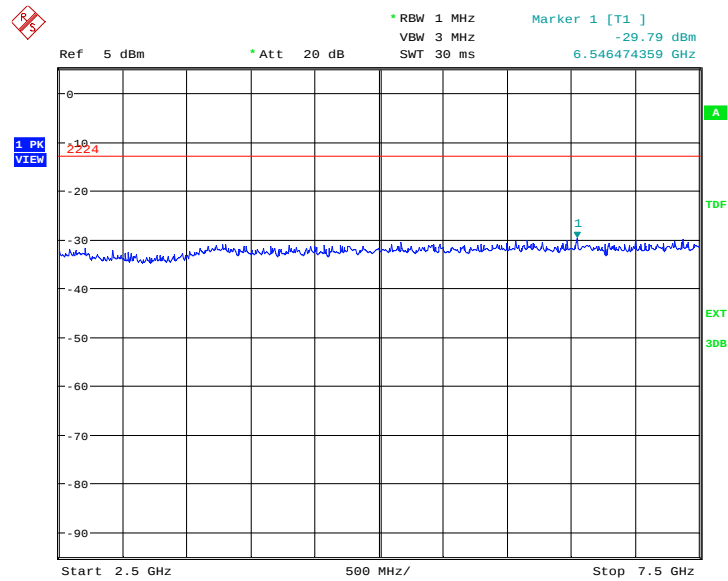

Date: 19.NOV.2013 09:47:04

A.8.3.52 Channel 4132: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

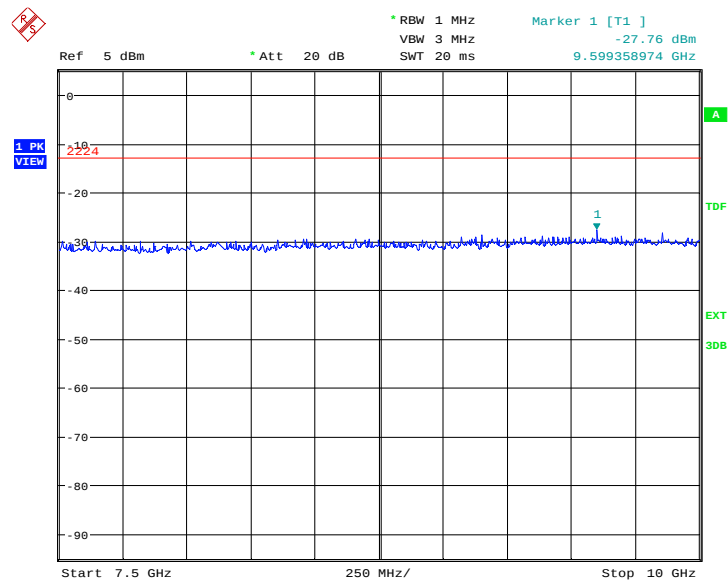


Date: 19.NOV.2013 09:47:31

A.8.3.53 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

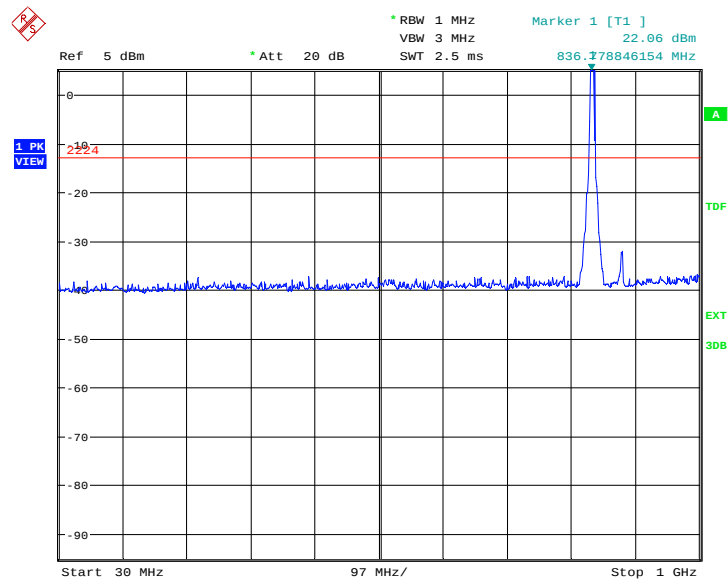

Date: 19.NOV.2013 09:48:01

A.8.3.54 Channel 4183: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

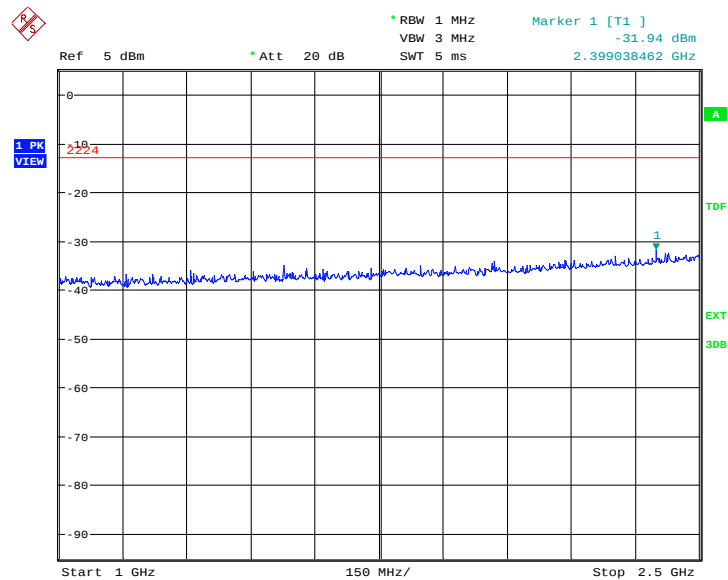

Date: 19.NOV.2013 09:48:28

A.8.3.55 Channel 4183: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

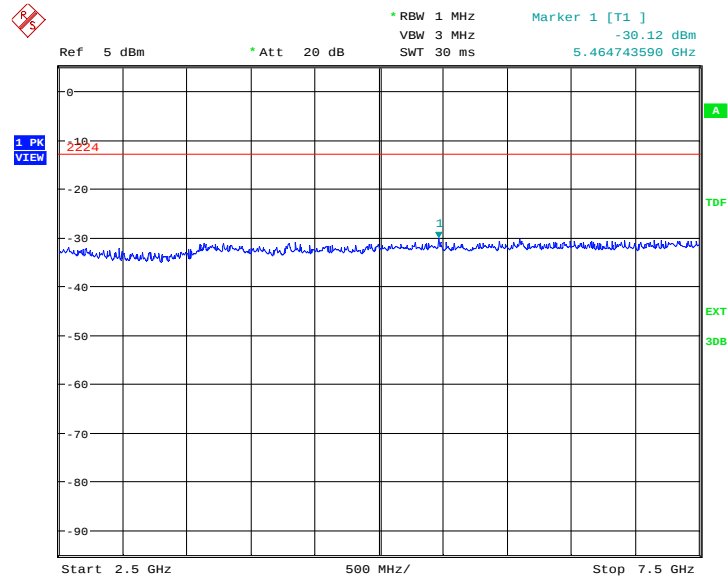

Date: 19.NOV.2013 09:48:55

A.8.3.56 Channel 4183: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

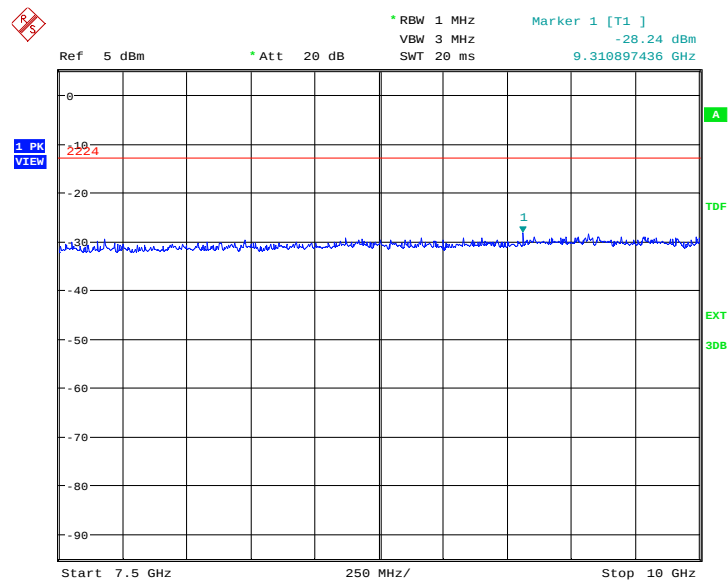


Date: 19.NOV.2013 09:49:22

A.8.3.57 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

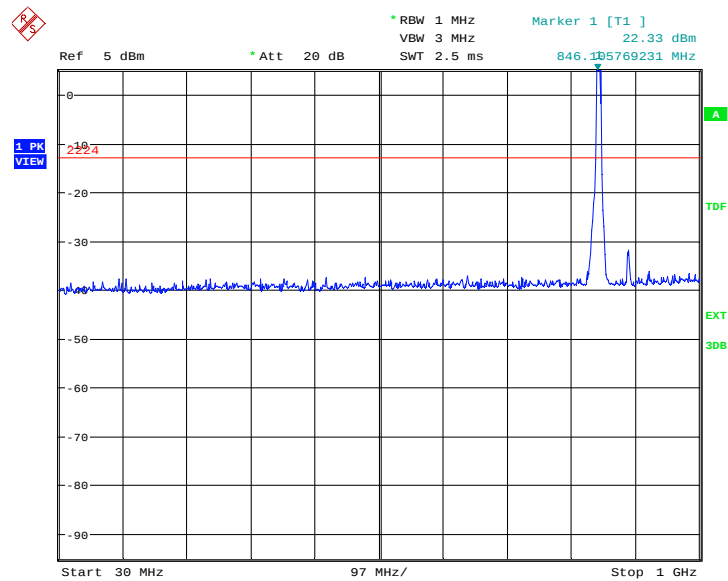

Date: 19.NOV.2013 09:49:52

A.8.3.58 Channel 4233: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

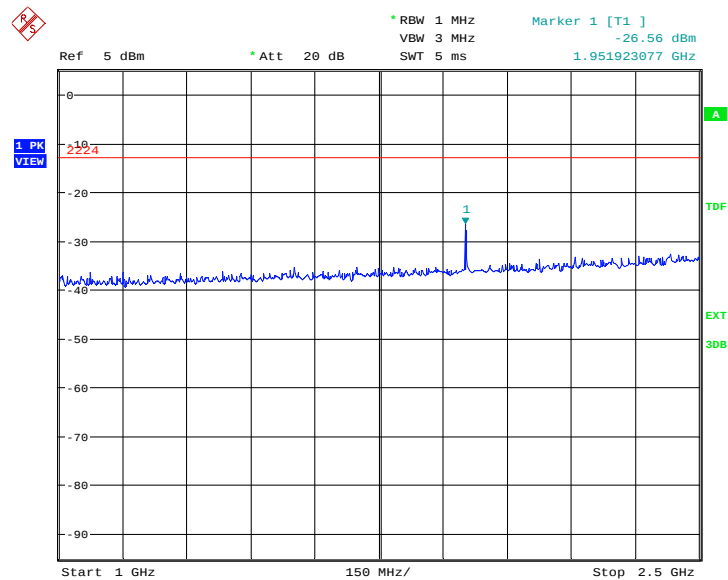

Date: 19.NOV.2013 09:50:19

A.8.3.59 Channel 4233: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

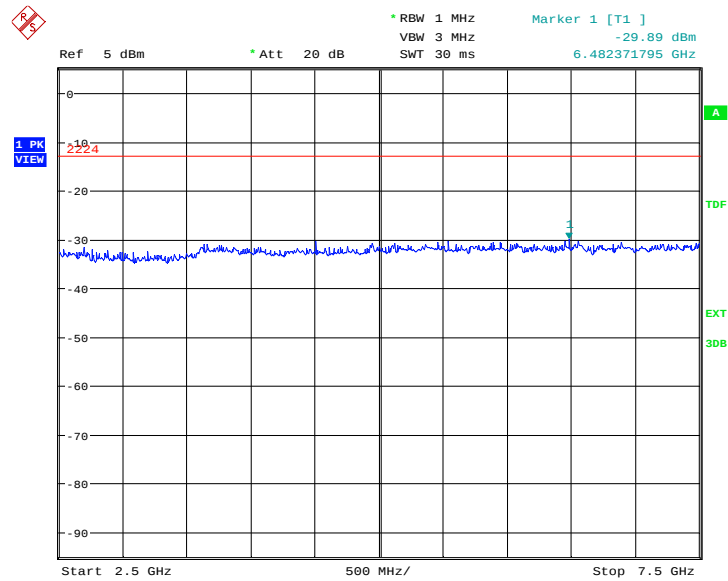

Date: 19.NOV.2013 09:50:46

A.8.3.60 Channel 4233: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

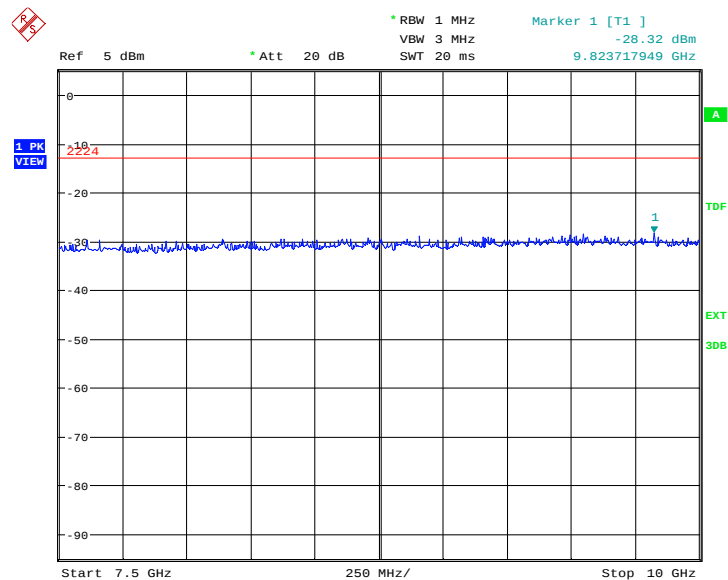

Date: 19.NOV.2013 09:51:13

A.8.3.61 Idle mode: 30MHz – 1GHz


Spurious emission limit -13dBm.

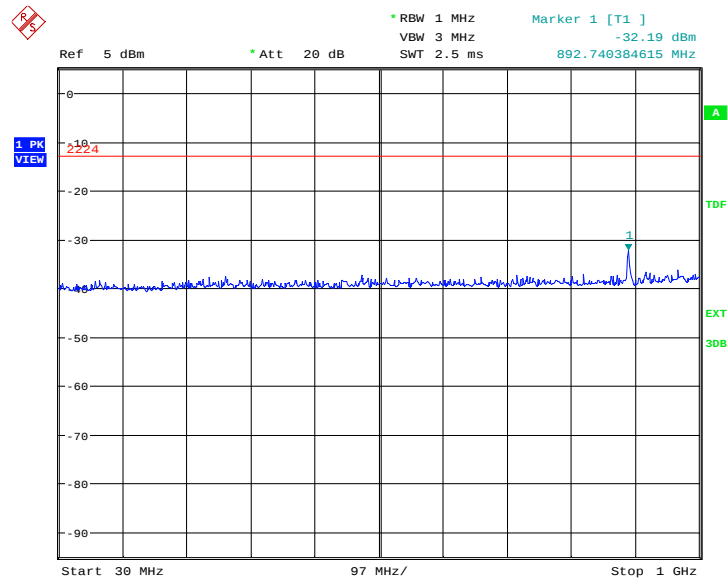

Date: 19.NOV.2013 09:51:41

A.8.3.62 Idle mode: 1GHz – 2.5GHz


Spurious emission limit -13dBm.

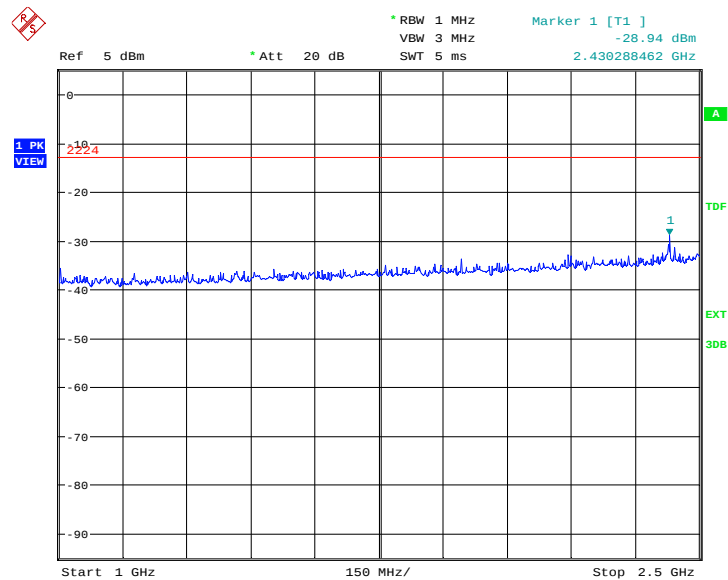

Date: 19.NOV.2013 09:52:08

A.8.3.63 Idle mode: 2.5GHz – 7.5GHz


Spurious emission limit -13dBm.

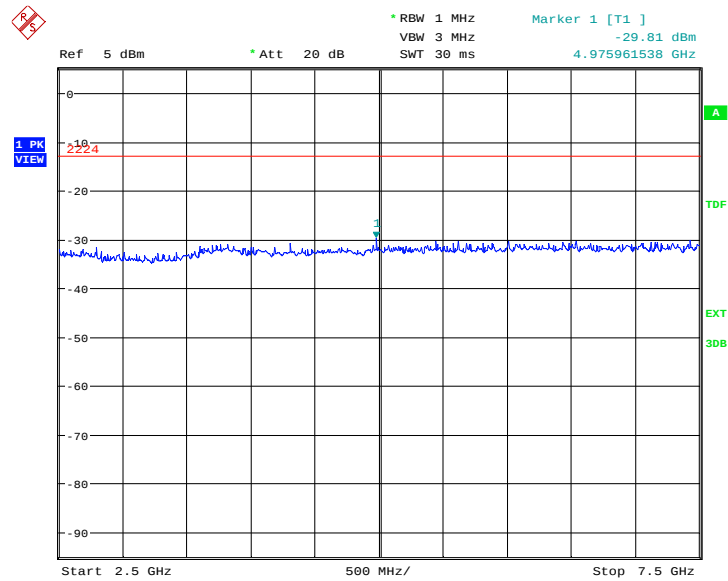

Date: 19.NOV.2013 09:52:35

A.8.3.64 Idle mode: 7.5GHz – 10GHz

Spurious emission limit -13dBm.

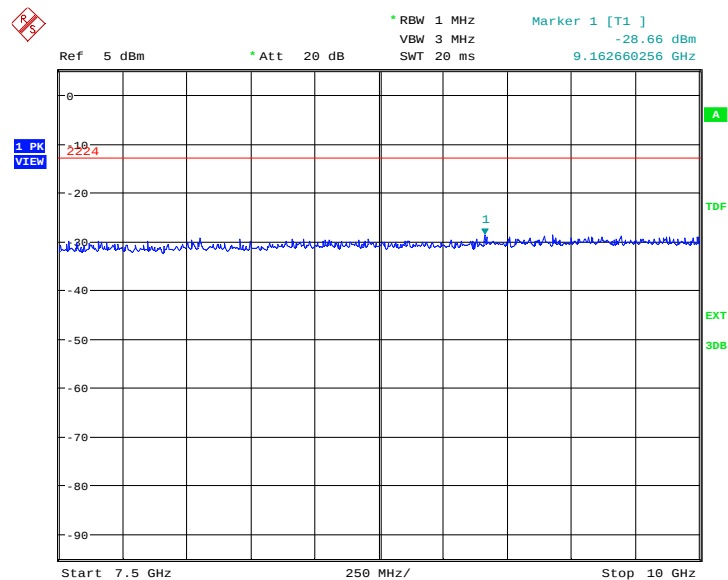

Date: 19.NOV.2013 09:53:02

END OF REPORT