



# FCC PART 15C TEST REPORT No. 2013TAR850

for

**TCT Mobile Limited**

**HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone**

**Model Name: Yaris-3.5**

**Marketing Name: 4015N**

**FCC ID: RAD429**

**with**

**Hardware Version: PIO**

**Software Version: VBB5**

**Issued Date: 2013-12-27**



**DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01**

**FCC 2.948 Listed: No.733176**

**IC O.A.T.S listed: No.6629B-1**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com

## **CONTENTS**

<b>CONTENTS .....</b>	<b>2</b>
<b>1. TEST LABORATORY .....</b>	<b>3</b>
1.1. TESTING LOCATION .....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA .....	3
1.4. SIGNATURE .....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION .....	4
2.2. MANUFACTURER INFORMATION .....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. NORMAL ACCESSORY SETTING .....	6
3.5. GENERAL DESCRIPTION.....	7
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>12</b>
A.1. MEASUREMENT METHOD .....	12
A.2. PEAK OUTPUT POWER - CONDUCTED .....	13
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	14
A.4. CONDUCTED EMISSION .....	16
A.5. RADIATED EMISSION.....	25
A.6. 6dB BANDWIDTH.....	33
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	35
A.8. AC POWERLINE CONDUCTED EMISSION.....	37

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,  
Beijing, P.R.China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304633

### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Extreme Temperature: -20/+55°C  
Relative Humidity: 20-75%

### 1.3. Project data

Project Leader: Zi Xiaogang  
Testing Start Date: 2013-12-09  
Testing End Date: 2013-12-24

### 1.4. Signature

Zi Xiaogang

(Prepared this test report)

Sun Xiangqian

(Reviewed this test report)

Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email: zhizhou.gong@jrdcom.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone
Model Name	Yaris-3.5
Marketing Name	4015N
FCC ID	RAD429
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

Note: The EUT is a variant model of 4015A. All the result is coming from the 4015A.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
N08	863462020051437	PIO	VBB5
N11	863462020050751	PIO	VBB5

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description		
AE1	Battery	/	TCT-B-1064
AE2	Battery	/	TCT-B-1059
AE3	Battery	/	TCT-B-0520
AE4	Battery	/	TCT-B-0888
AE5	Battery	/	TCT-B-0880
AE6	Travel charger	/	TCT-CHR-1265
AE7	Travel charger	/	TCT-CHR-1399
AE8	Travel charger	/	13169CHR10
AE9	USB cable	/	TCT-DC-0203
AE10	USB cable	/	TCT-DC-0499
AE11	USB cable	/	/
AE12	USB cable	/	/
AE1, AE2			
Model	CAB31P0000C1		
Manufacturer	BYD		
Capacitance	1300 mAh		
Nominal voltage	3.7V		
AE3			

Model	CAB31P0000C2
Manufacturer	BAK
Capacitance	1300 mAh
Nominal voltage	3.7V
AE4, AE5	
Model	CAB31P0000C3
Manufacturer	SCUD
Capacitance	1300 mAh
Nominal voltage	3.7V
AE6	
Model	CBA3007AG0C2
Manufacturer	TENPAO
Length of cable	/
AE7	
Model	CBA3007AG0C3
Manufacturer	YINGJU
Length of cable	/
AE8	
Model	CBA3007AG0C1
Manufacturer	BYD
Length of cable	/
AE9	
Model	CDA3122002C1
Manufacturer	JUWEI
Length of cable	100 cm
AE10	
Model	CDA3122002C2
Manufacturer	Shenghua
Length of cable	100 cm
AE11	
Model	CDA3122005C1
Manufacturer	JUWEI
Length of cable	/
AE12	
Model	CDA3122005C2
Manufacturer	Shenghua
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. Normal Accessory setting

Fully charged battery is used during the test.

### 3.5. General Description

The Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	10-1-12
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	2009

## **5. LABORATORY ENVIRONMENT**

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

## **6. SUMMARY OF TEST RESULTS**

### **6.1. Summary of Test Results**

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.  
**F** Fail, The EUT does not comply with the essential requirements in the standard  
**NA** Not Applicable, The test was not applicable  
**NP** Not Performed, The test was not performed by TMC

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
Conducted Emission	15.247 (d)	<b>P</b>
Radiated Emission	15.247, 15.205, 15.209	<b>P</b>
Frequency Band Edges	15.247 (d)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### **6.2. Statements**

TMC has evaluated the test cases requested by the applicant /manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 7. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	CALIBRATION INTERVAL
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2014-06-12	1 year

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	Rohde & Schwarz	2014-01-05	1 year
2	EMI Antenna	VULB 9163	9163482	Schwarzbeck	2014-02-17	3 year
3	EMI Antenna	3117	00119024	EMCO	2014-02-03	1 year
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	2014-06-30	3 year
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-30	3 year
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	2014-09-15	1 year
7	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-03-17	1 year
8	Pre-amplifier (18GHz)	SCU18	1005277	Rohde & Schwarz	/	/
9	Pre-amplifier (26.5GHz)	SCU26	1006788	Rohde & Schwarz	/	/
10	Loop Antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2014-12-12	3 year

### Anechoic chamber

Fully anechoic chamber by Frankonia German.


## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

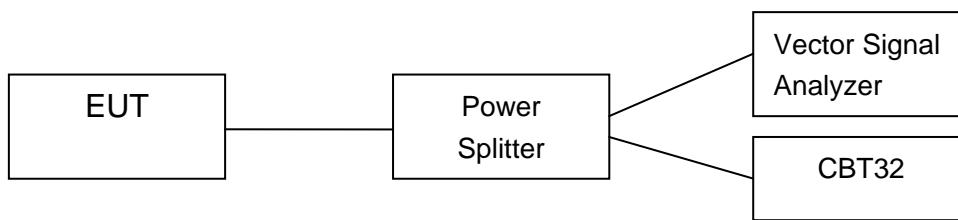

#### A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

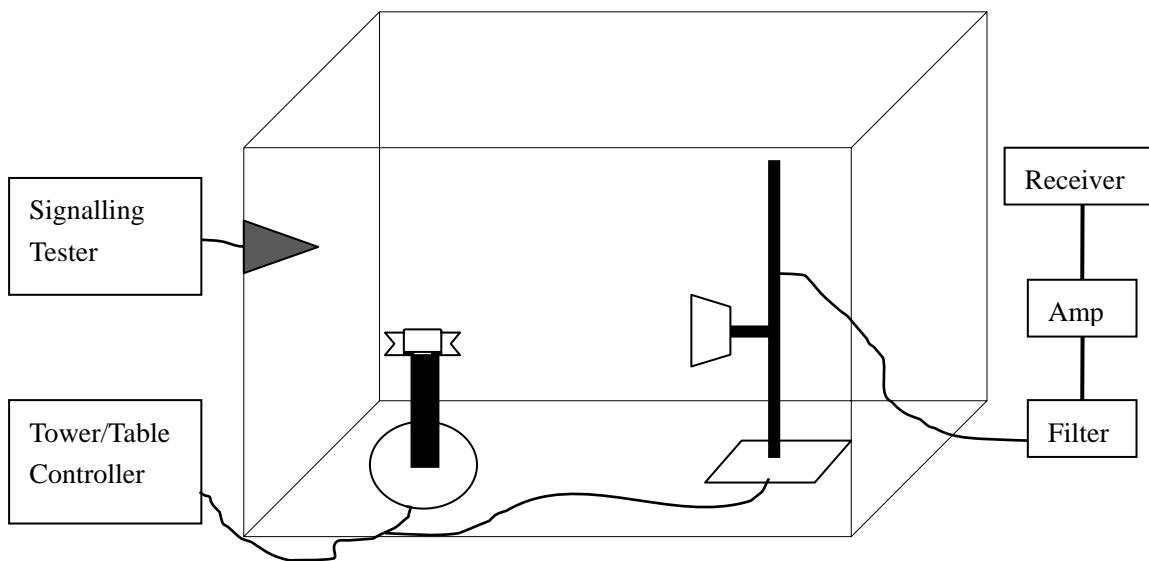

### A.2. Peak Output Power - Conducted

#### Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

The measurement is made according to ANSI C63.10.

#### Test Condition

Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	1MHz	5MHz	0	5ms

#### Measurement Results:

##### For GFSK

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	-0.23	0.10	0.21	P

**Conclusion: PASS**

### A.3. Frequency Band Edges - Conducted Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.10.


#### Measurement Result:

##### For GFSK

Frequency	Hopping	Band Edge Power ( dBc)		Conclusion
2402MHz	Hopping OFF	Fig.1	-55.18	P
2480MHz	Hopping OFF	Fig.2	-59.02	P


**Conclusion: PASS**

**Test graphs as below**

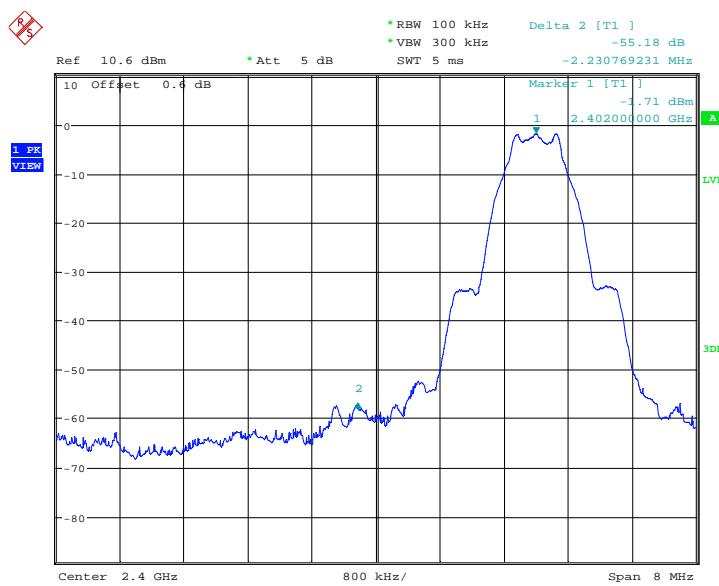

Date: 2.DEC.2013 14:41:41

Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

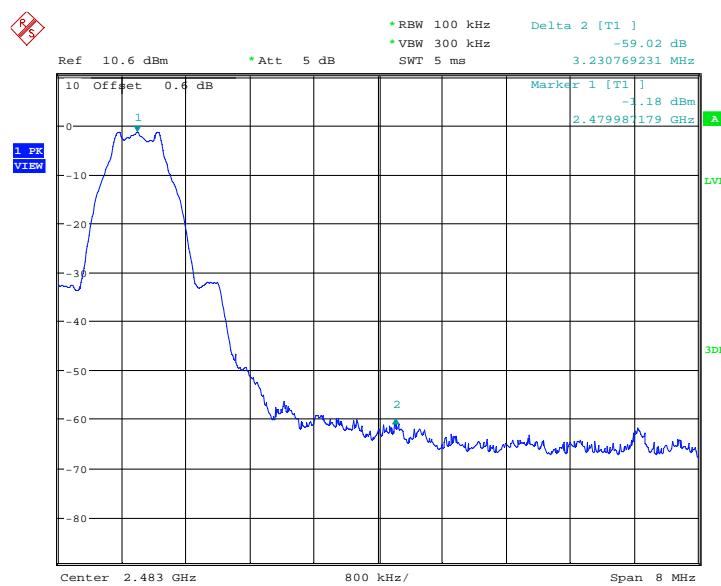

Date: 2.DEC.2013 14:54:17

Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

**A.4. Conducted Emission****Measurement Limit:**


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.10.

**Measurement Results:****For GFSK**


Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	Center Frequency	Fig.3	P
	30 MHz ~ 1 GHz	Fig.4	P
	1 GHz ~ 3 GHz	Fig.5	P
	3 GHz ~ 10 GHz	Fig.6	P
	10GHz ~ 26 GHz	Fig.7	P
2440 MHz	Center Frequency	Fig.8	P
	30 MHz ~ 1 GHz	Fig.9	P
	1 GHz ~ 3 GHz	Fig.10	P
	3 GHz ~ 10 GHz	Fig.11	P
	10GHz ~ 26 GHz	Fig.12	P
2480 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS****Test graphs as below**

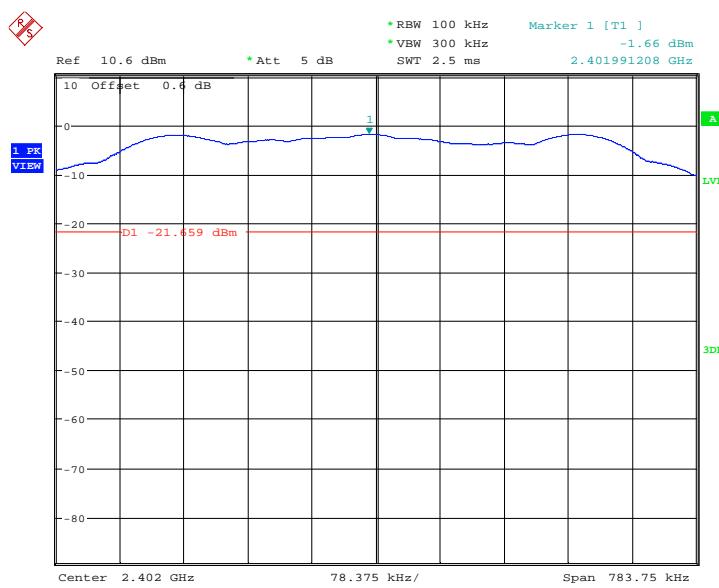


Date: 2.DEC.2013 14:40:05

Fig.3. Conducted spurious emission: GFSK, 2402MHz

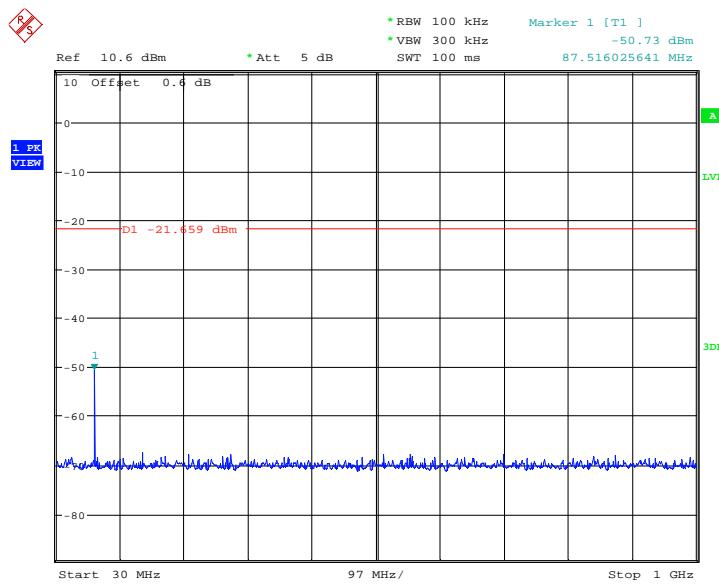


Date: 2.DEC.2013 14:40:21

Fig.4. Conducted spurious emission: GFSK, 2402 MHz, 30MHz - 1GHz

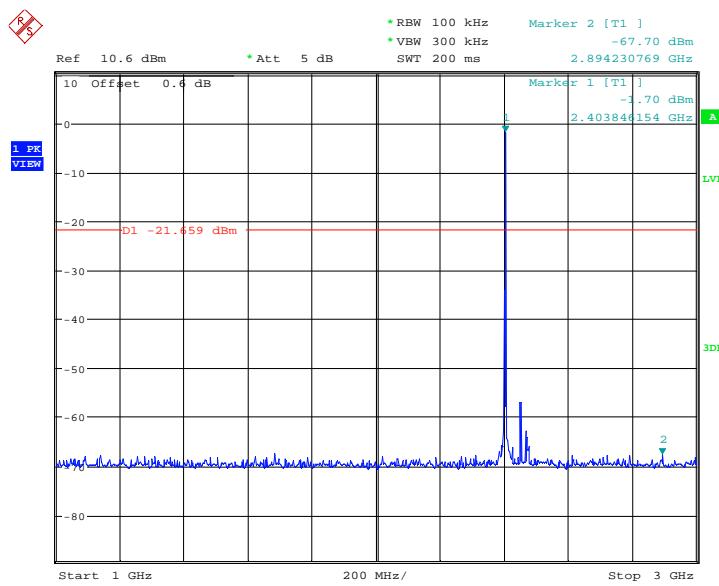


Date: 2.DEC.2013 14:40:52

Fig.5. Conducted spurious emission: GFSK, 2402 MHz, 1GHz - 3GHz

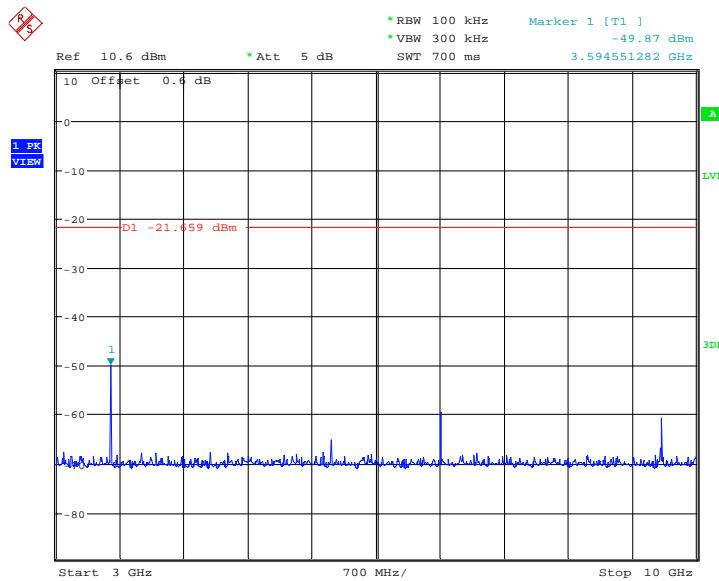


Date: 2.DEC.2013 14:41:08

Fig.6. Conducted spurious emission: GFSK, 2402 MHz, 3GHz - 10GHz

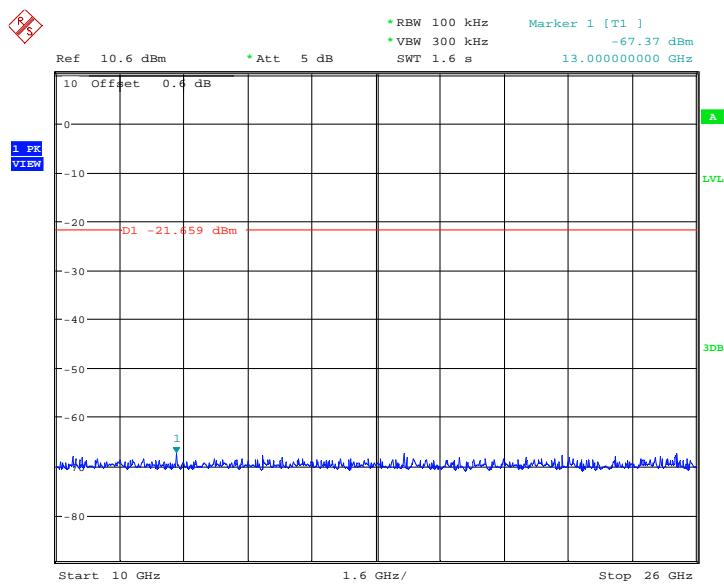


Date: 2.DEC.2013 14:41:24

Fig.7. Conducted spurious emission: GFSK, 2402 MHz, 10GHz - 26GHz

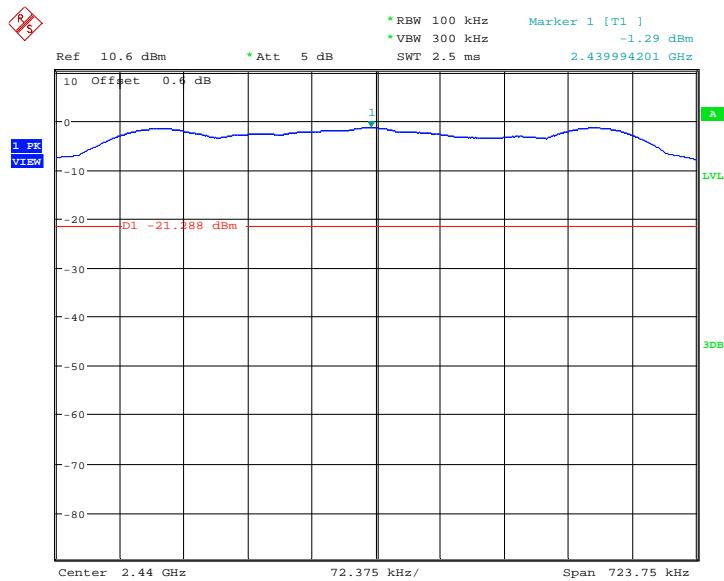


Date: 2.DEC.2013 14:46:33

Fig.8. Conducted spurious emission: GFSK, 2440MHz

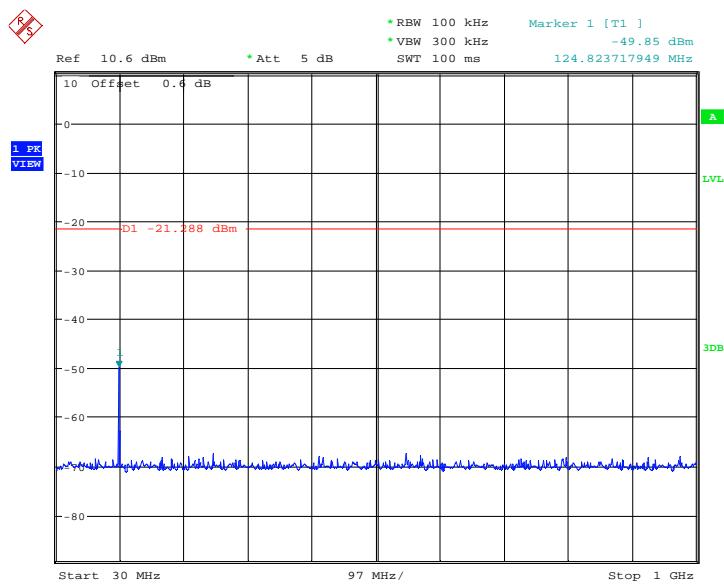


Date: 2.DEC.2013 14:46:49

Fig.9. Conducted spurious emission: GFSK, 2440 MHz, 30MHz - 1GHz

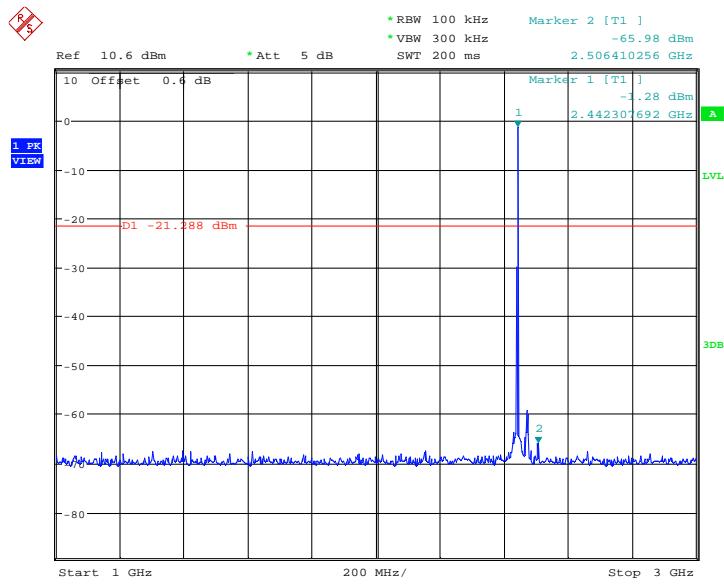


Date: 2.DEC.2013 14:47:20

Fig.10. Conducted spurious emission: GFSK, 2440 MHz, 1GHz – 3GHz

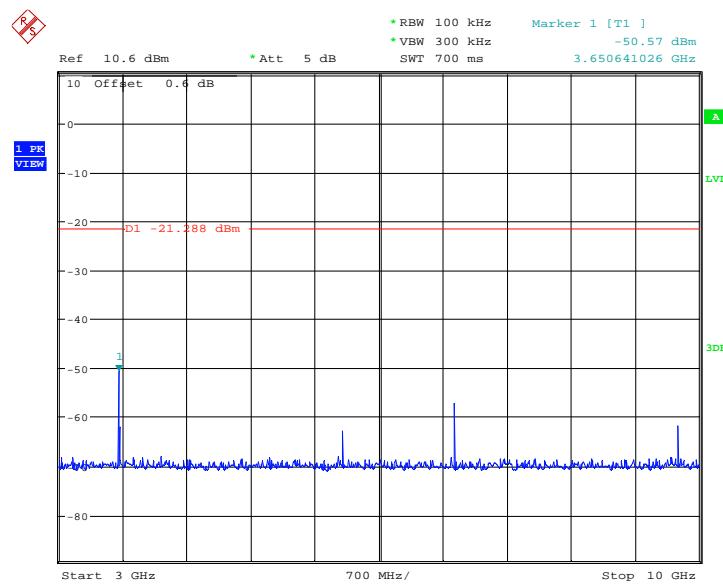


Date: 2.DEC.2013 14:47:36

Fig.11. Conducted spurious emission: GFSK, 2440 MHz, 3GHz – 10GHz

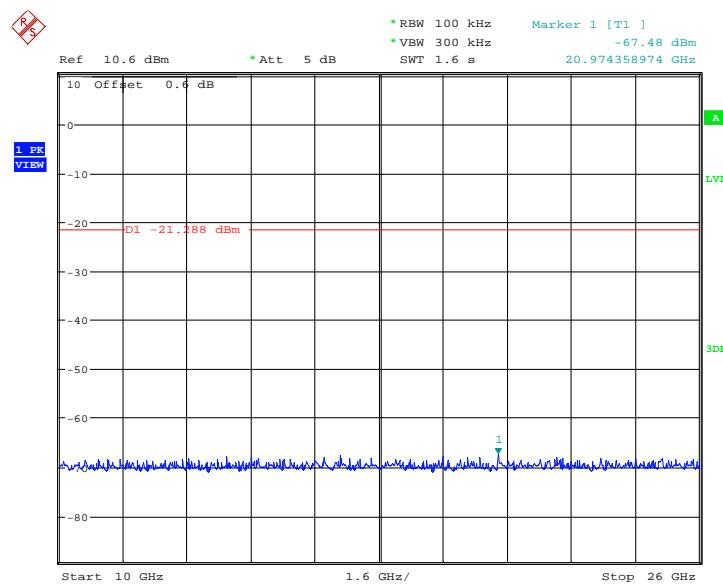


Date: 2.DEC.2013 14:47:52

Fig.12. Conducted spurious emission: GFSK, 2440 MHz, 10GHz – 26GHz

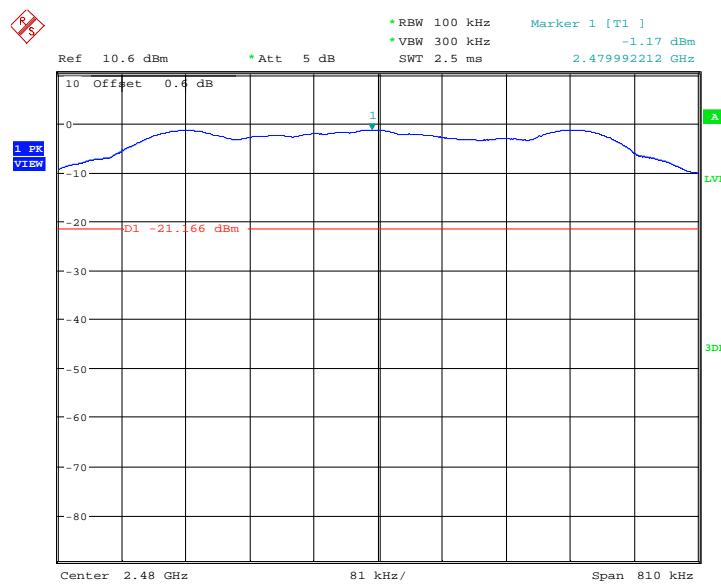


Date: 2.DEC.2013 14:52:41

Fig.13. Conducted spurious emission: GFSK, 2480 MHz

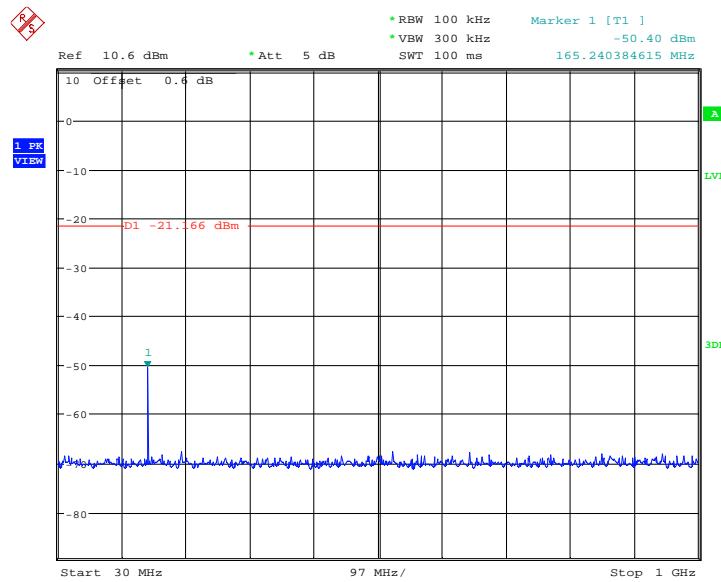


Date: 2.DEC.2013 14:52:57

Fig.14. Conducted spurious emission: GFSK, 2480 MHz, 30MHz - 1GHz

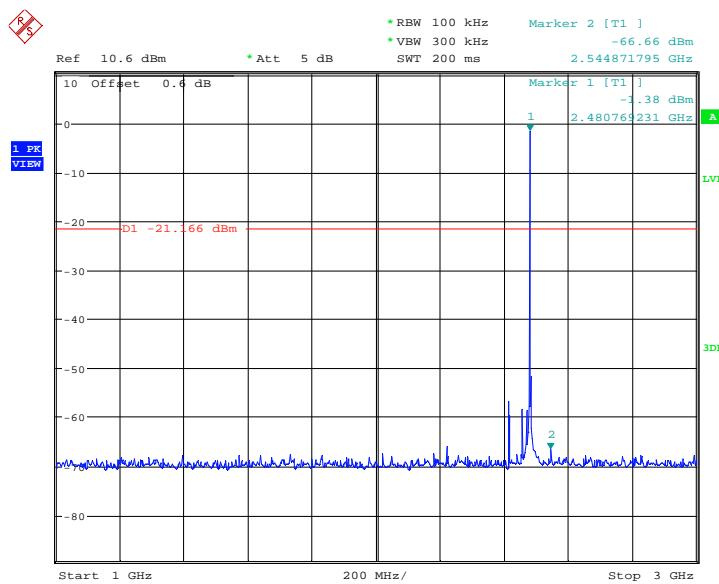


Date: 2.DEC.2013 14:53:28

Fig.15. Conducted spurious emission: GFSK, 2480 MHz, 1GHz - 3GHz

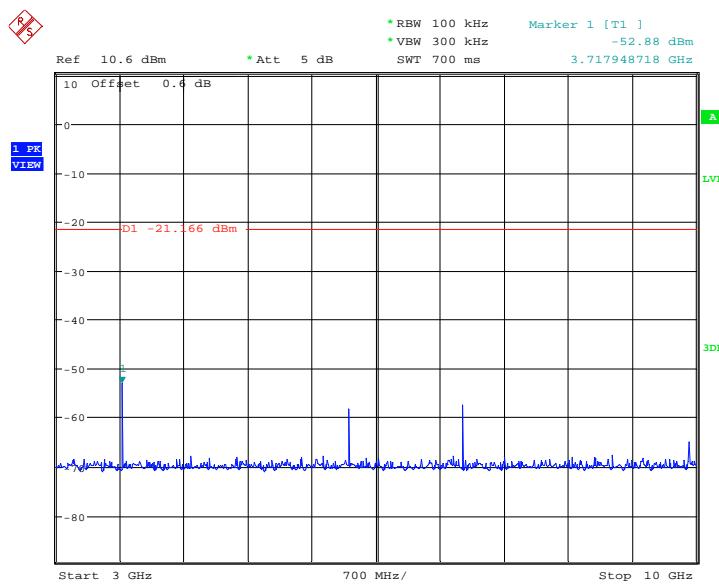

Date: 2.DEC.2013 14:53:44

Fig.16. Conducted spurious emission: GFSK, 2480 MHz, 3GHz - 10GHz

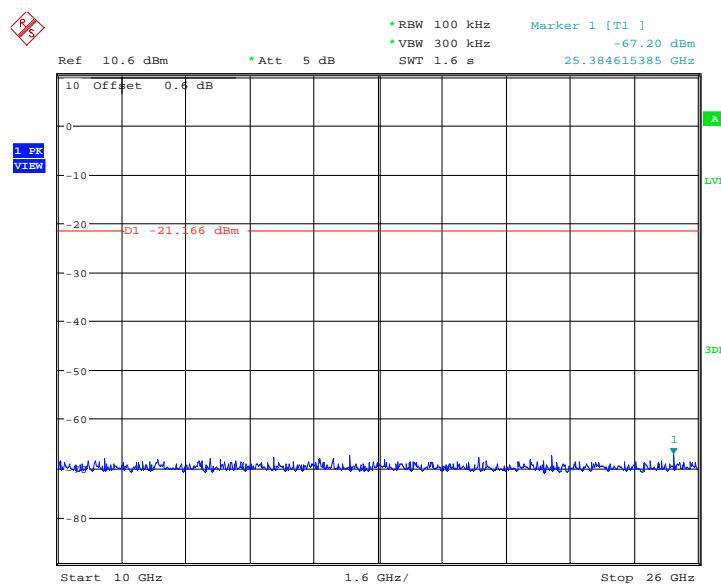

Date: 2.DEC.2013 14:53:59

Fig.17. Conducted spurious emission: GFSK, 2480 MHz, 10GHz - 26GHz

## A.5. Radiated Emission

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

### Measurement Results:

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{RPL}}$$

### For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	30 MHz ~ 1 GHz	Fig.18	P
	1 GHz ~ 3 GHz	Fig.19	P
	3 GHz ~ 18 GHz	Fig.20	P
2441 MHz	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P

2480 MHz	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 18 GHz	Fig.26	P
Power	2.38GHz~2.4GHz---L	Fig.27	P
Power	2.45GHz~2.5GHz---H	Fig.28	P
For all channels	18 GHz ~ 26 GHz	Fig.29	P

**GFSK 2402MHz -Average**

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
2390.000	36.5	11.1	47.600	V
17929.500	45.9	27.9	18.000	H
17788.500	45.6	27.1	18.500	H
17878.500	45.4	27.1	18.300	H
17832.000	45.3	27.1	18.200	V
17802.000	45.2	27.1	18.100	H

**GFSK 2440MHz -Average**

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
17748.000	45.9	27.1	18.800	H
17802.000	45.7	27.1	18.600	H
17920.500	45.1	27.9	17.200	V
17959.500	45.1	27.9	17.200	H
17914.500	44.8	27.9	16.900	H
17932.500	44.6	27.9	16.700	H

**GFSK 2480MHz -Average**

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
2483.500	36.9	11.2	48.100	V
17853.000	46.3	27.1	19.200	H
17811.000	46.0	27.1	18.900	V
17641.500	45.8	26.7	19.100	V
17968.500	45.7	27.9	17.800	V
17704.500	45.5	26.7	18.800	H

**Conclusion: PASS**
**Test graphs as below:**

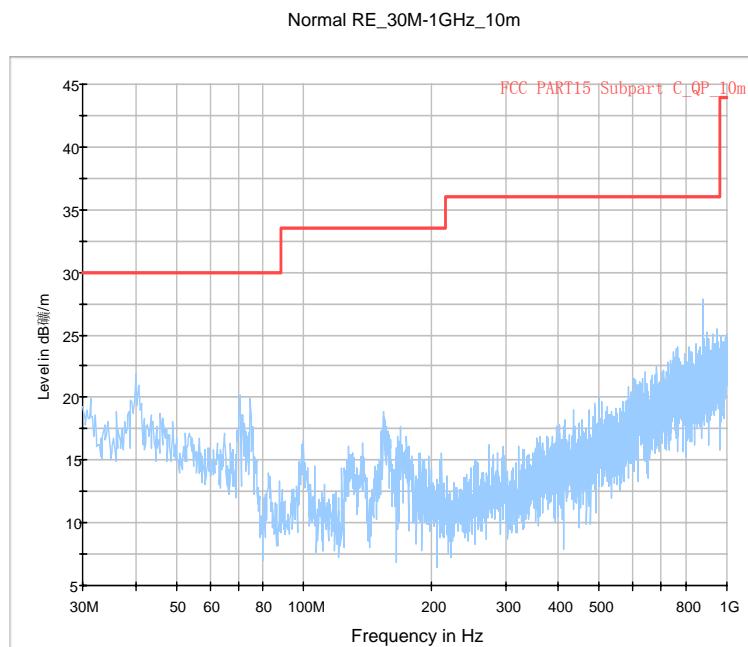


Fig.18. Radiated emission: GFSK, 2402MHz, 30 MHz - 1 GHz

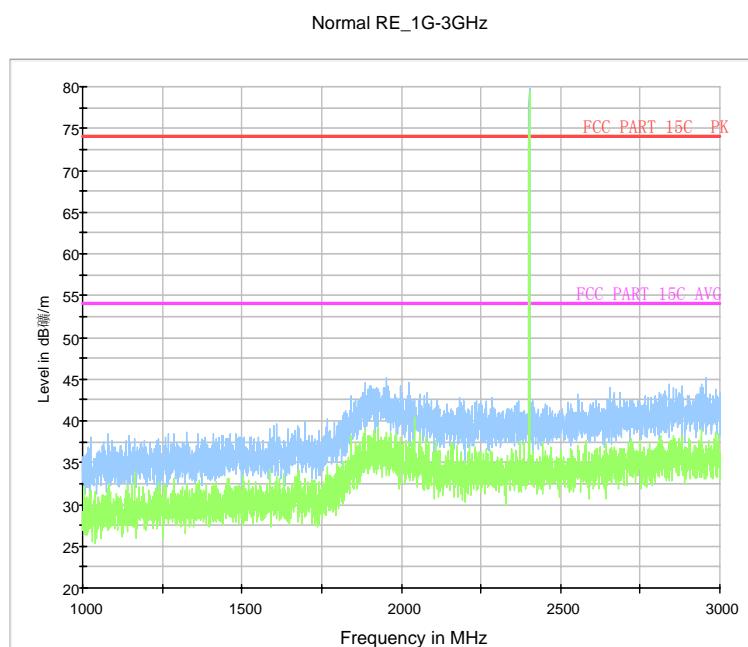


Fig.19. Radiated emission: GFSK, 2402MHz, 1 GHz - 3GHz

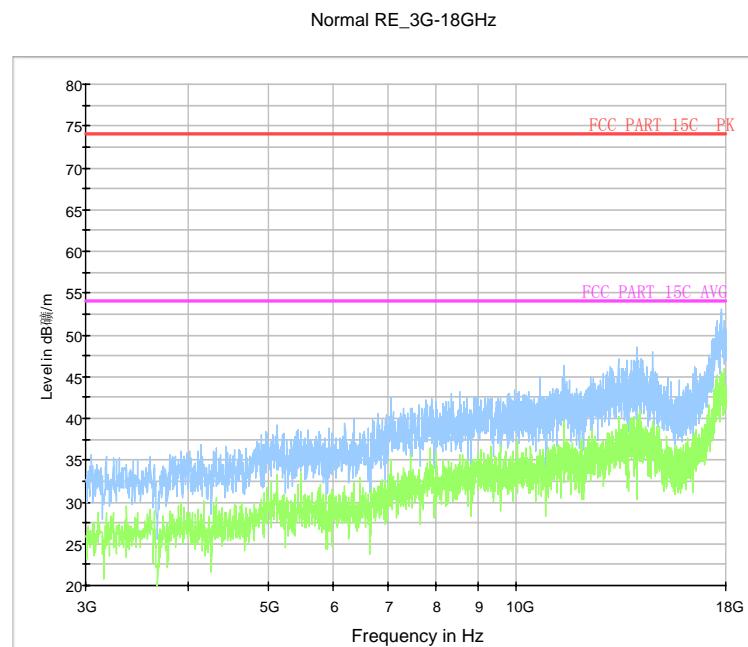


Fig.20. Radiated emission: GFSK, 2402MHz, 3 GHz - 18 GHz

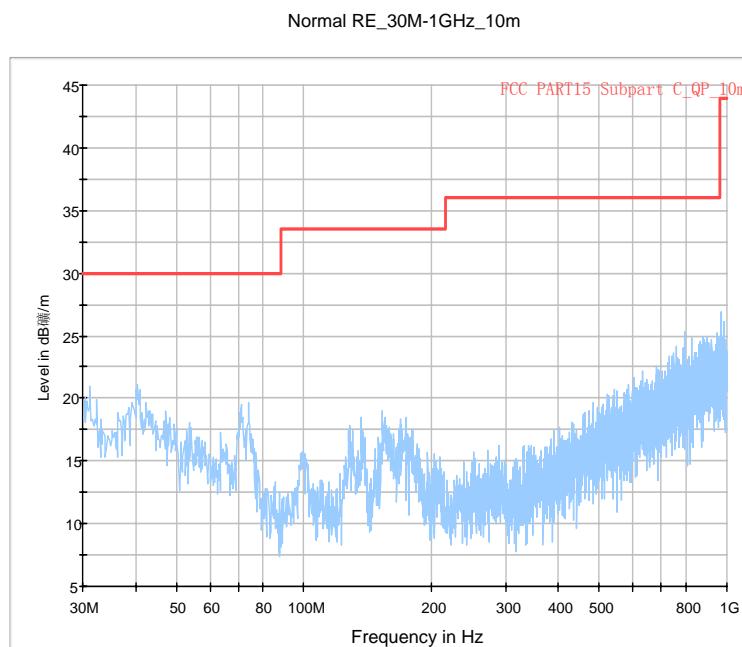


Fig.21. Radiated emission: GFSK, 2440MHz, 30 MHz - 1 GHz

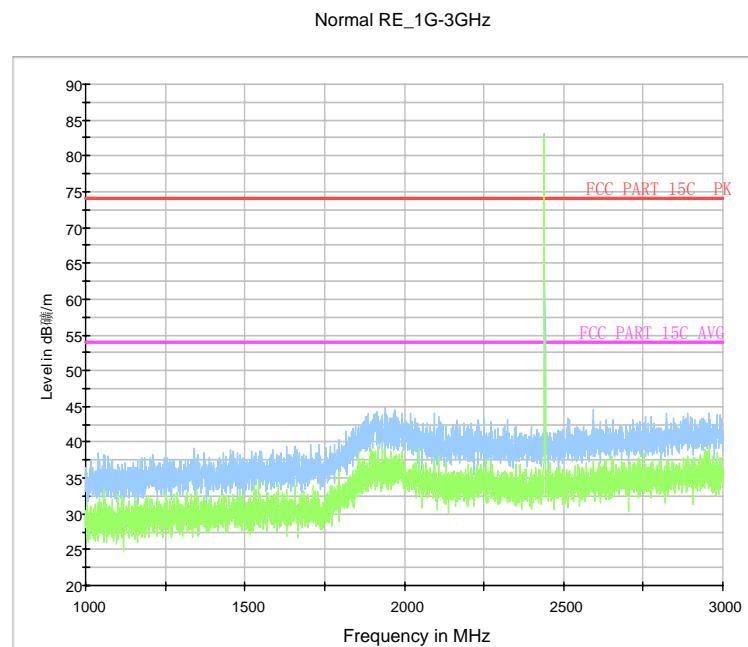


Fig.22. Radiated emission: GFSK, 2440MHz, 1 GHz - 3 GHz

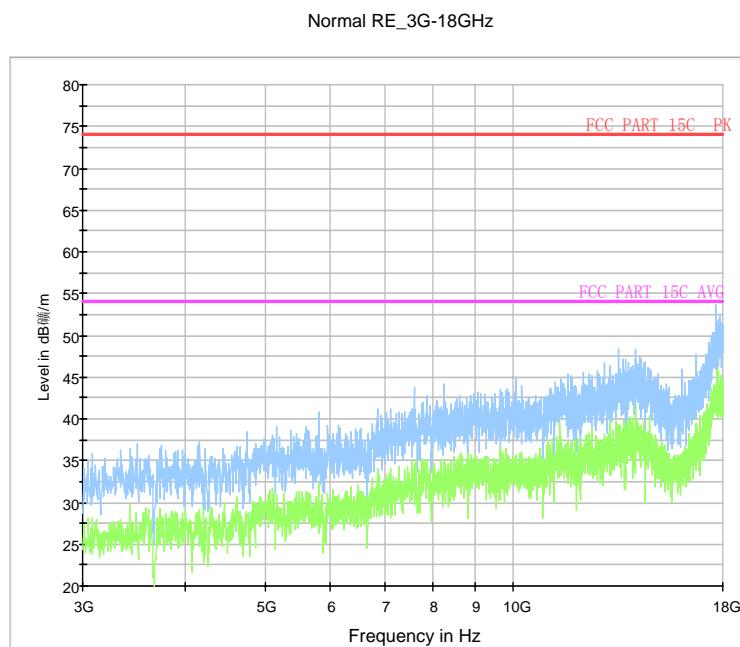


Fig.23. Radiated emission: GFSK, 2440MHz, 3 GHz - 18 GHz

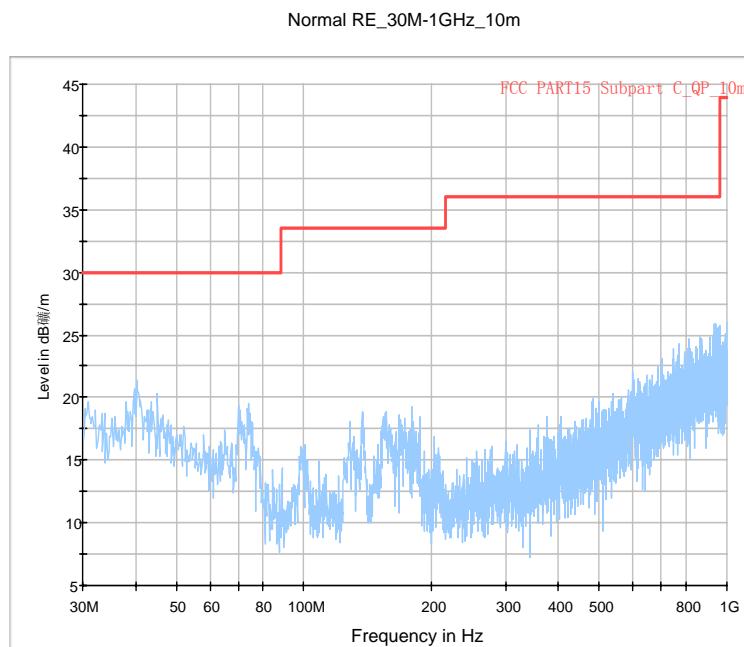


Fig.24. Radiated emission: GFSK, 2480MHz, 30 MHz - 1 GHz

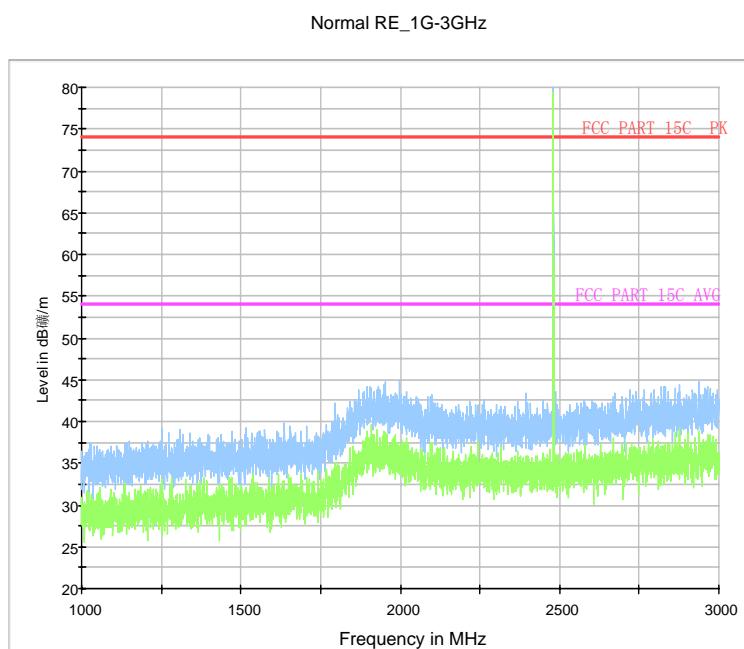


Fig.25. Radiated emission: GFSK, 2480MHz, 1 GHz - 3 GHz

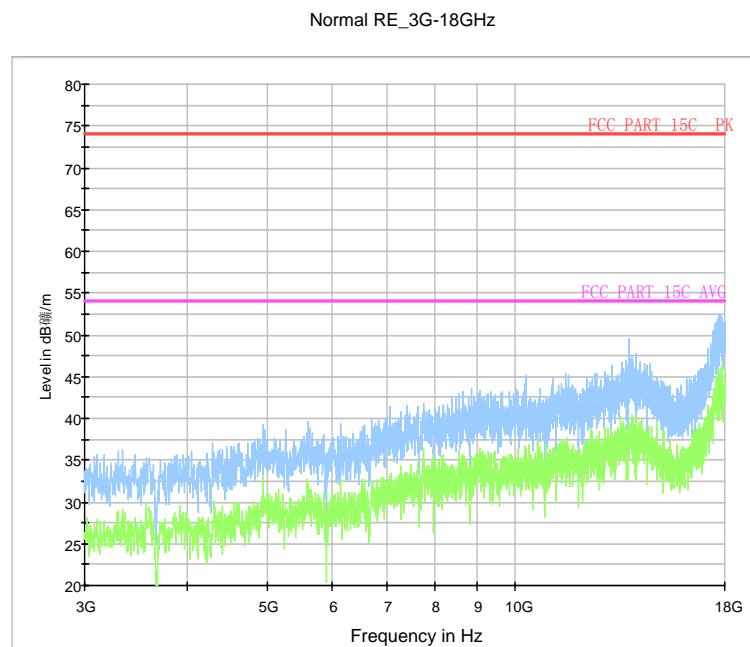


Fig.26. Radiated emission: GFSK, 2480MHz, 3 GHz - 18 GHz

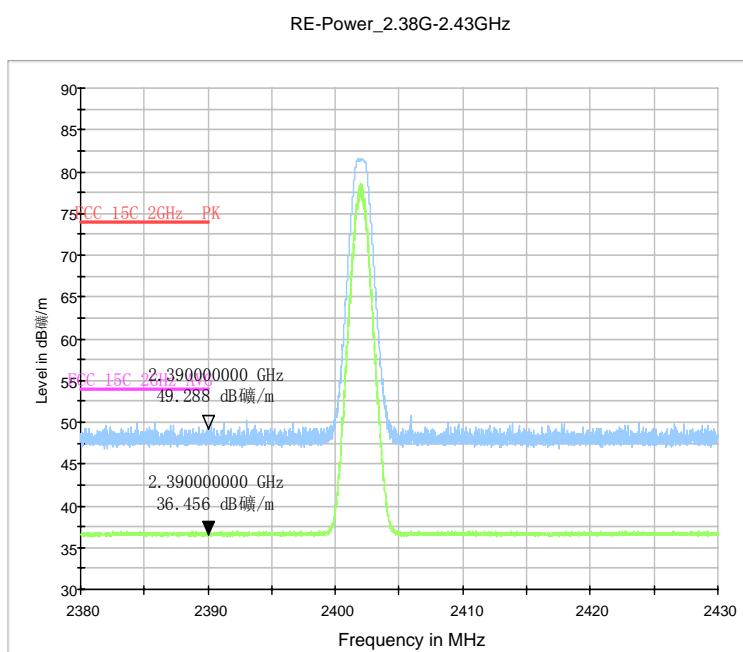


Fig.27. Radiated emission (Power): GFSK low channel

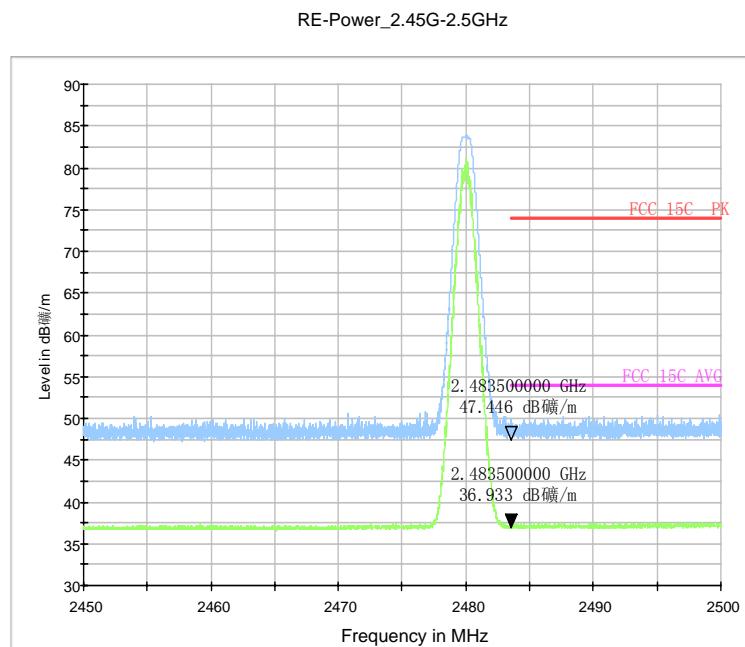


Fig.28. Radiated emission (Power): GFSK high channel

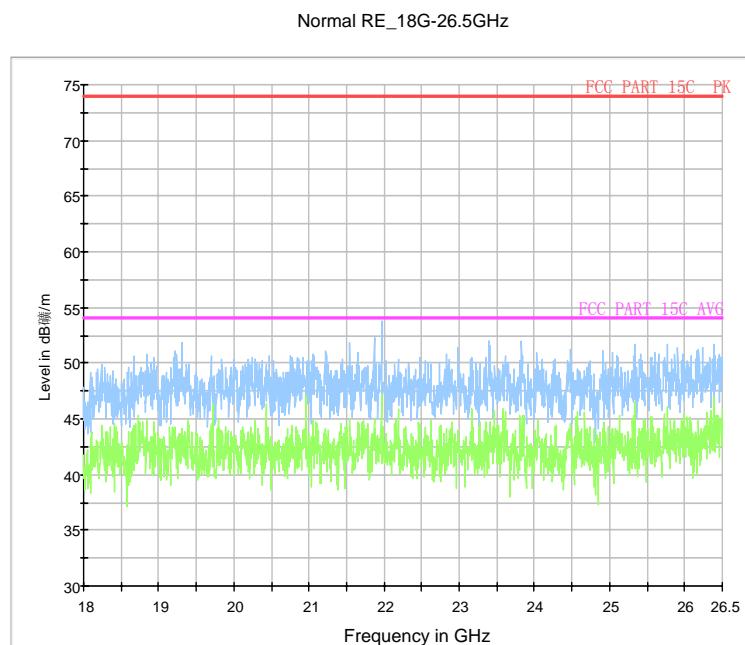


Fig.29. Radiated emission: GFSK, 18 GHz - 26 GHz

## A.6. 6dB Bandwidth

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	>= 500KHz

The measurement is made according to ANSI C63.10


### Measurement Results:

#### For GFSK

Frequency	6dB Bandwidth (kHz)		Conclusion
2402MHz	Fig.30	669.87	P
2440MHz	Fig.31	618.59	P
2480MHz	Fig.32	692.31	P


**Conclusion: PASS**

**Test graphs as below:**

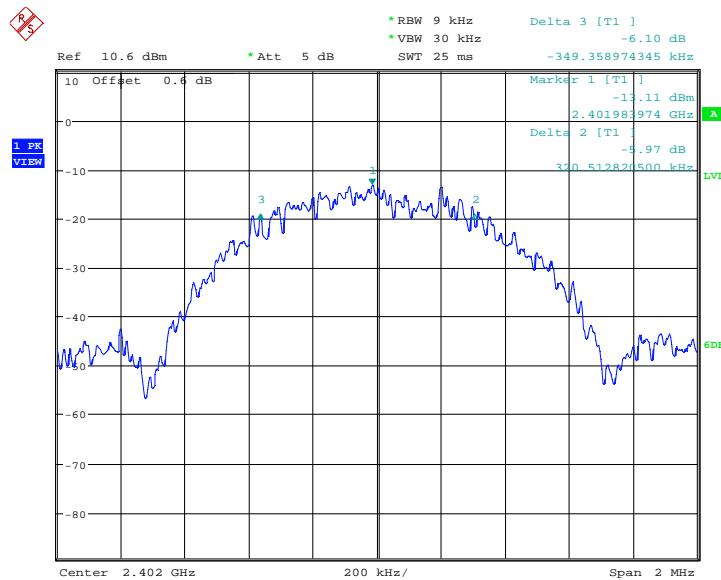


Date: 2.DEC.2013 14:39:23

Fig.30. 6dB Bandwidth: GFSK, 2402 MHz

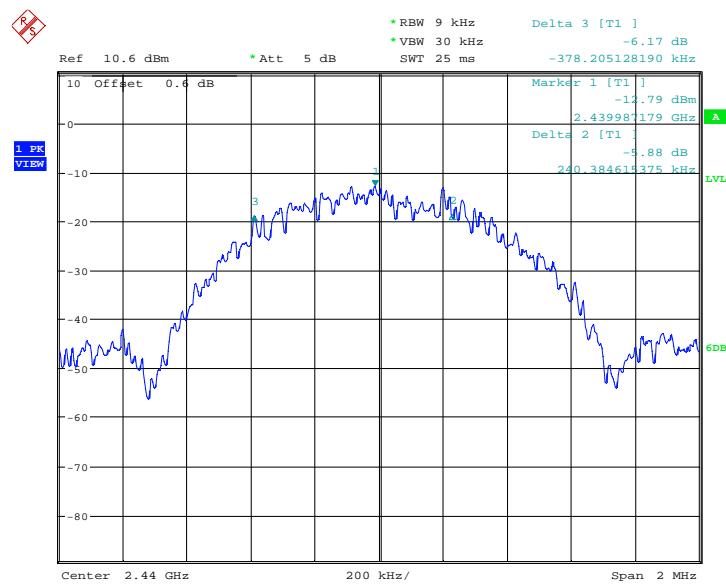

Date: 2.DEC.2013 14:45:51

Fig.31. 6dB Bandwidth: GFSK, 2440 MHz

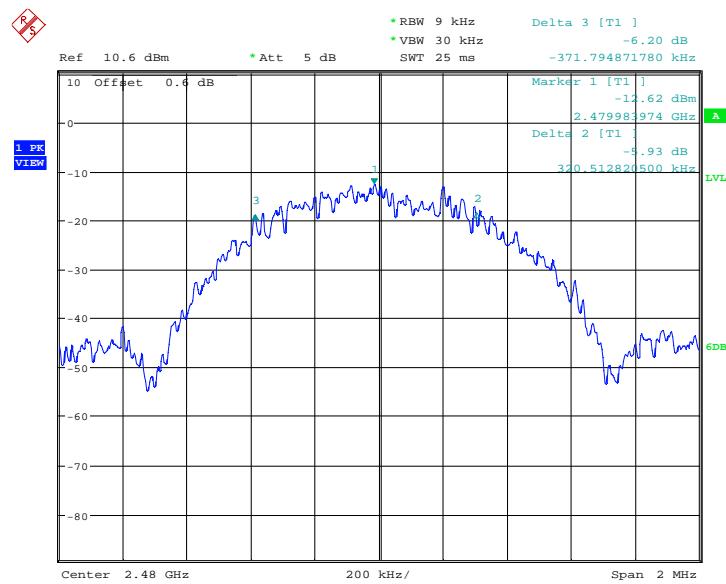

Date: 2.DEC.2013 14:51:59

Fig.32. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	<=8.0dBm


Use the peak marker function of spectrum analyzer to determine the maximum power level in any 100 kHz band. Then Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF =  $10\log(3 \text{ kHz}/100\text{kHz}) = -15.2 \text{ dB}$

### Measurement Results:

#### For GFSK


Frequency	Maximum Power Spectral Density Level(dBm)	Conclusion
2402MHz	Fig.33	-16.85
2440MHz	Fig.34	-16.49
2480MHz	Fig.35	-16.37

### Test graphs as below:

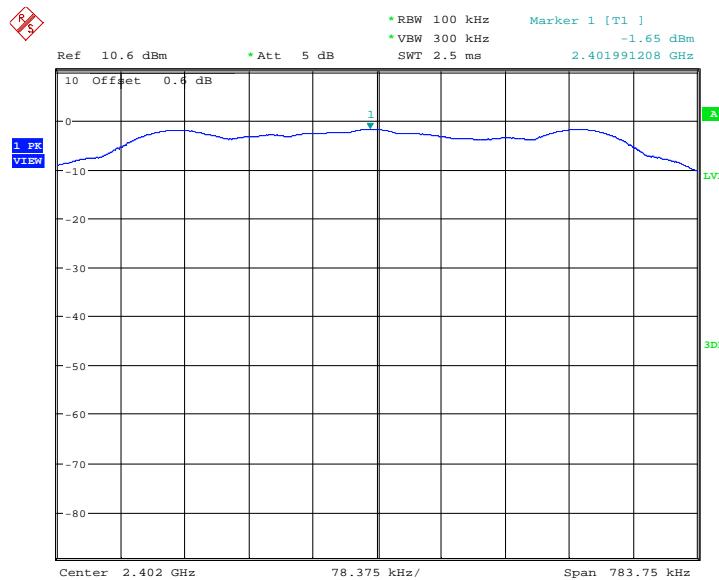


Date: 2.DBC.2013 14:39:48

Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

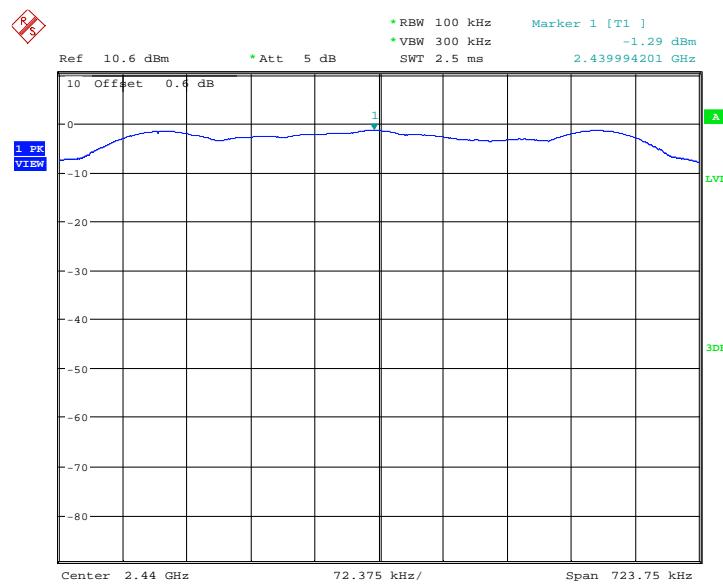

Date: 2.DEC.2013 14:46:16

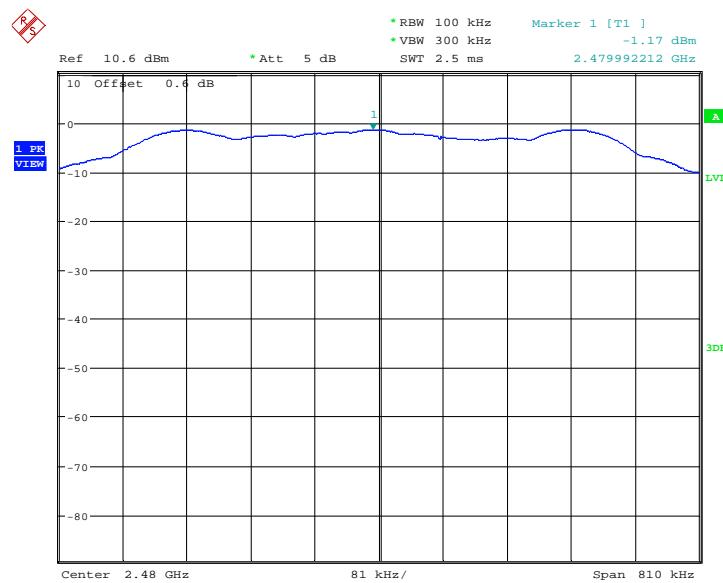**Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz**


Date: 2.DEC.2013 14:52:23

**Fig.35. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz**

**A.8. AC Powerline Conducted Emission****Test Condition**

Voltage (V)	Frequency (Hz)
120	60

**Measurement Result and limit:****Bluetooth (Quasi-peak Limit)**

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Bluetooth (Average Limit)**

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

Note: the worst case is given.


**Test graphs as below:**

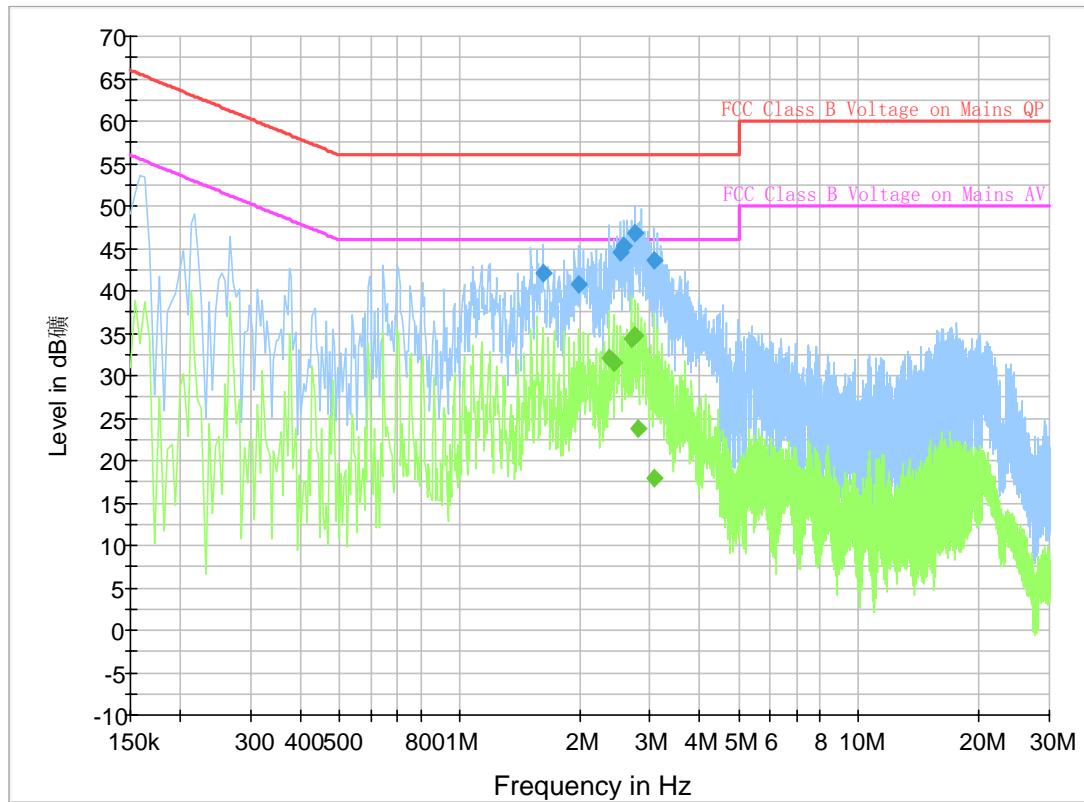**Traffic:**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
1.617000	42.0	GND	L1	9.7	14.0	56.0
1.986000	40.8	GND	L1	9.7	15.2	56.0
2.526000	44.6	GND	L1	9.7	11.4	56.0
2.584500	45.3	GND	L1	9.7	10.7	56.0
2.746500	46.9	GND	L1	9.7	9.1	56.0
3.066000	43.6	GND	L1	9.7	12.4	56.0

**Final Result 2**

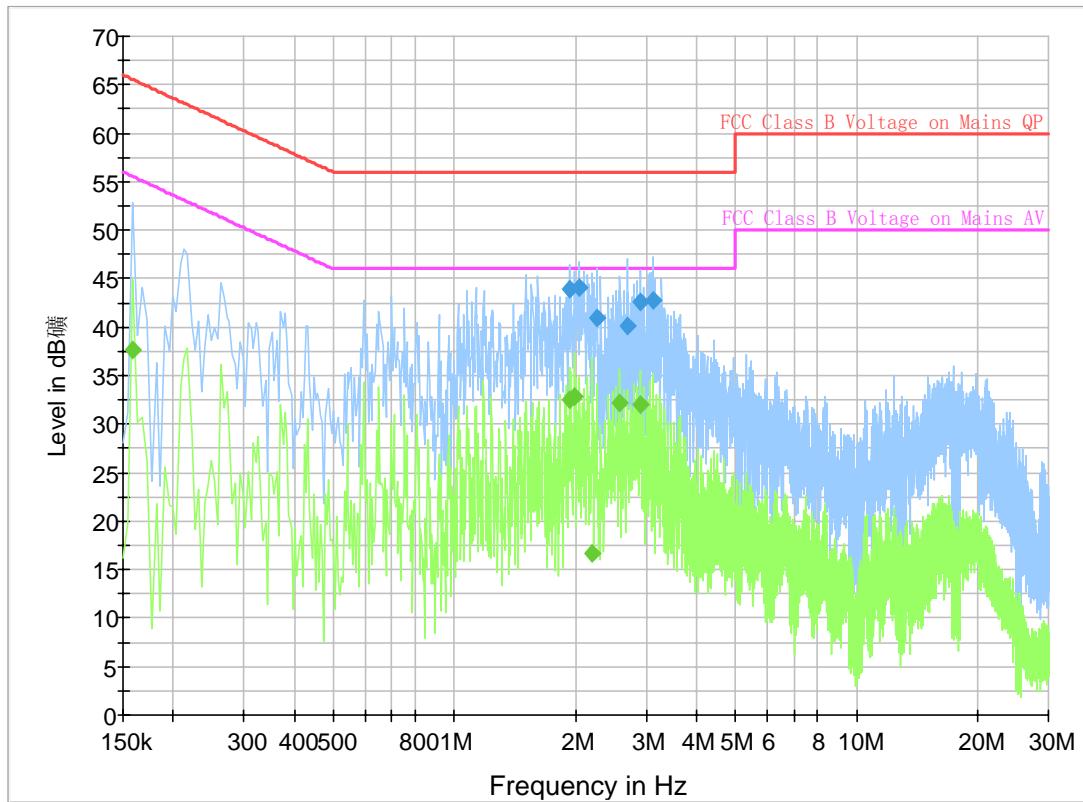Frequency (MHz)	Average (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
2.368500	32.0	GND	L1	9.7	14.0	46.0
2.427000	31.5	GND	L1	9.7	14.5	46.0
2.688000	34.3	GND	L1	9.7	11.7	46.0
2.746500	34.8	GND	L1	9.7	11.2	46.0
2.805000	23.8	GND	L1	9.7	22.2	46.0
3.066000	17.9	GND	L1	9.7	28.1	46.0

**Idle:**


### Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
1.936500	43.9	GND	L1	9.7	12.1	56.0
2.044500	44.0	GND	L1	9.7	12.0	56.0
2.265000	41.0	GND	L1	9.7	15.0	56.0
2.692500	40.0	GND	N	9.7	16.0	56.0
2.904000	42.6	GND	N	9.7	13.4	56.0
3.124500	42.7	GND	L1	9.7	13.3	56.0

### Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.159000	37.7	GND	L1	9.8	17.9	55.5
1.936500	32.5	GND	L1	9.7	13.5	46.0
1.990500	32.9	GND	L1	9.7	13.1	46.0
2.206500	16.7	GND	L1	9.7	29.3	46.0
2.584500	32.2	GND	N	9.7	13.8	46.0
2.904000	32.0	GND	N	9.7	14.0	46.0

\*\*\* END OF REPORT BODY \*\*\*