



TEST REPORT

No. 2013TAR789

for

TCT Mobile Limited

**HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 3 bands
mobile phone**

Model Name: Diablo HD LTE LATAM V2

Marketing Name: ONE TOUCH 6034Y

FCC ID: RAD433

with

Hardware Version: PIO

Software Version: v1B2T

Issued Date: 2013-12-06

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. NORMAL ACCESSORY SETTING	6
3.5. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS	11
A.1 OUTPUT POWER	11
A.2 EMISSION LIMIT	23
A.3 CONDUCTED EMISSION	29
A.4 FREQUENCY STABILITY	36
A.5 OCCUPIED BANDWIDTH	43
A.6 EMISSION BANDWIDTH	56
A.7 BAND EDGE COMPLIANCE	69
A.8 CONDUCTED SPURIOUS EMISSION	94

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2013-11-16
Testing End Date: 2013-12-05


1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 3 bands mobile phone
Model name	Diablo HD LTE LATAM V2
Marketing Name	ONE TOUCH 6034Y
FCC ID	RAD433
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA Band V;WCDMA BAND II;LTE BAND II;LTE BAND IV
Antenna	Integrated
Output power	Maximum EIRP measured 21.70dBm for LTE BAND 2
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.9VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N07	013922000050906	PIO	v1B2T
N09	013922000050831	PIO	v1B2T

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Battery
AE3	Travel charger
AE4	Travel charger

AE1

Model	CAC2000005C2
Manufacturer	SCUD
Nominal voltage	3.8V

AE2

Model	CAC2000008C1
Manufacturer	BYD
Nominal voltage	3.8V

AE3

Model	CBA3000AG0C1
-------	--------------

Manufacturer	Tenpao
AE4	
Model	CBA3000AG0C2
Manufacturer	BYD

*AE ID: is used to identify the test sample in the lab internally..

3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 3 bands Mobile Phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-12 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-12 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:

P	Pass
NA	Not applicable
F	Fail

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(b)	A.1	P
2	Emission Limit	24.238, 2.1051	A.2	P
3	Conducted Emission	15.107/207	A.3	P
4	Frequency Stability	24.235, 2.1055	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P
6	Emission Bandwidth	24.238(b)	A.6	P
7	Band Edge Compliance	24.238(b)	A.7	P
8	Conducted Spurious Emission	24.238, 2.1057	A.8	P

LTE Band 4

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(2)	A.1	P
2	Emission Limit	27.53(h), 2.1051	A.2	P
3	Conducted Emission	15.107/15.207	A.3	P
4	Frequency Stability	27.54, 2.1055	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P
6	Emission Bandwidth	27.53(h)	A.6	P
7	Band Edge Compliance	27.53(h)	A.7	P
8	Conducted Spurious Emission	27.53(h), 2.1057	A.8	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2014-03-27
2	Test Receiver	ESU26	100235	R&S	2014-01-05
3	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
4	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
5	LISN	ESH2-Z5	829991/012	R&S	2014-04-14
6	Spectrum Analyzer	E4440A	MY48250642	Agilent	2014-03-04
7	EMI Antenna	9117	177	Schwarzbeck	2014-06-29
8	EMI Antenna	VULB 9163	482	Schwarzbeck	2014-02-17
9	EMI Antenna	3117	00119024	ETS-Lindgren	2014-02-02
10	EMI Antenna	3117	00058889	ETS-Lindgren	2014-02-02
11	Signal Generator	N5183A	MY49060052	Agilent	2014-03-19
12	Climate chamber	SH-241	92003546	ESPEC	2014-05-11
13	Universal Radio Communication Tester	CMW500	101675	R&S	2014-07-10
14	Spectrum Analyzer	FSU26	200030	R&S	2014-06-12
15	Vector Signal Analyzer	FSQ40	200089	R&S	2014-07-07

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 24.232(b), 27.50(d)(2).

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with spectrum analyzer's peak detector.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

LTE band 2

Measurement result

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	21.07	19.87
		1880.0	21.61	20.41
		1850.7	21.56	20.36
	1 RB low	1909.3	21.20	20.04
		1880.0	21.57	20.28
		1850.7	21.63	20.38
	50% RB mid	1909.3	21.08	20.06
		1880.0	21.63	20.63
		1850.7	21.58	20.42
	100% RB	1909.3	20.16	19.25
		1880.0	20.54	19.69
		1850.7	20.65	19.62
3MHz	1 RB high	1908.5	21.07	20.50
		1880.0	21.44	20.89
		1851.5	21.52	20.96
	1 RB low	1908.5	21.35	20.82
		1880.0	21.54	20.92
		1851.5	21.46	20.92
	50% RB mid	1908.5	20.30	19.32

		1880.0	20.72	19.74
		1851.5	20.62	19.63
	100% RB	1908.5	20.32	19.27
		1880.0	20.64	19.66
		1851.5	20.59	19.59
5MHz	1 RB high	1907.5	21.13	19.78
		1880.0	21.71	20.20
		1852.5	21.75	20.36
	1 RB low	1907.5	21.37	20.06
		1880.0	21.51	20.14
		1852.5	21.64	20.21
	50% RB mid	1907.5	20.38	19.41
		1880.0	20.72	19.66
		1852.5	20.69	19.61
	100% RB	1907.5	20.42	19.33
		1880.0	20.51	19.61
		1852.5	20.66	19.67
10MHz	1 RB high	1905.0	21.22	20.87
		1880.0	21.61	21.19
		1855.0	21.70	21.32
	1 RB low	1905.0	21.41	21.07
		1880.0	21.54	21.25
		1855.0	21.55	21.20
	50% RB mid	1905.0	20.44	19.41
		1880.0	20.50	19.65
		1855.0	20.65	19.61
	100% RB	1905.0	20.26	19.22
		1880.0	20.44	19.45
		1855.0	20.47	19.40
15MHz	1 RB high	1902.5	21.21	20.83
		1880.0	21.62	21.26
		1857.5	21.72	21.37
	1 RB low	1902.5	21.58	21.13
		1880.0	21.64	21.27
		1857.5	21.48	21.18
	50% RB mid	1902.5	20.12	19.56
		1880.0	20.49	19.70
		1857.5	20.43	19.85
	100% RB	1902.5	20.23	19.21
		1880.0	20.39	19.41

		1857.5	20.46	19.46
20MHz	1 RB high	1900.0	21.29	20.14
		1880.0	21.66	20.52
		1860.0	21.74	20.64
	1 RB low	1900.0	21.47	20.35
		1880.0	21.61	20.58
		1860.0	21.40	20.34
	50% RB mid	1900.0	20.25	19.27
		1880.0	20.39	19.46
		1860.0	20.56	19.53
	100% RB	1900.0	20.33	19.35
		1880.0	20.46	19.52
		1860.0	20.63	19.56

LTE band 4
Measurement result

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1754.3	22.61	21.40
		1732.5	22.72	21.50
		1710.7	22.79	21.53
	1 RB low	1754.3	22.63	21.36
		1732.5	22.61	21.33
		1710.7	22.82	21.57
	50% RB mid	1754.3	22.61	21.62
		1732.5	22.54	21.67
		1710.7	22.90	21.90
	100% RB	1754.3	21.61	20.69
		1732.5	21.53	20.65
		1710.7	21.78	20.87
3MHz	1 RB high	1753.5	22.47	21.83
		1732.5	22.50	21.90
		1711.5	22.57	21.95
	1 RB low	1753.5	22.47	21.88
		1732.5	22.47	21.86
		1711.5	22.74	22.11
	50% RB mid	1753.5	21.53	20.56
		1732.5	21.47	20.55
		1711.5	21.67	20.74
	100% RB	1753.5	21.49	20.52
		1732.5	21.47	20.42
		1711.5	21.69	20.62
5MHz	1 RB high	1752.5	22.51	21.20
		1732.5	22.66	21.51
		1712.5	22.57	21.48
	1 RB low	1752.5	22.51	21.11
		1732.5	22.51	21.33
		1712.5	22.72	21.49
	50% RB mid	1752.5	21.58	20.56
		1732.5	21.53	20.47
		1712.5	21.64	20.58
	100% RB	1752.5	21.48	20.54
		1732.5	21.42	20.51
		1712.5	21.54	20.53
10MHz	1 RB high	1750.0	22.55	21.98

		1732.5	22.89	22.41
		1715.0	22.56	22.05
		1750.0	22.65	22.10
	1 RB low	1732.5	22.39	21.95
		1715.0	22.76	22.22
		1750.0	21.46	20.51
	50% RB mid	1732.5	21.41	20.35
		1715.0	21.58	20.51
		1750.0	21.32	20.28
	100% RB	1732.5	21.38	20.36
		1715.0	21.35	20.36
		1750.0	21.32	20.28
		1732.5	21.38	20.36
15MHz	1 RB high	1747.5	22.58	22.00
		1732.5	22.80	22.34
		1717.5	22.54	22.02
	1 RB low	1747.5	22.57	22.08
		1732.5	22.35	21.87
		1717.5	22.59	22.08
	50% RB mid	1747.5	21.30	20.78
		1732.5	21.33	20.66
		1717.5	21.38	20.62
	100% RB	1747.5	21.43	20.42
		1732.5	21.41	20.36
		1717.5	21.20	20.27
20MHz	1 RB high	1745.0	22.73	21.64
		1732.5	22.67	21.71
		1720.0	22.64	21.53
	1 RB low	1745.0	22.71	21.60
		1732.5	22.55	21.40
		1720.0	22.60	21.53
	50% RB mid	1745.0	21.42	20.35
		1732.5	21.50	20.39
		1720.0	21.32	20.38
	100% RB	1745.0	21.32	20.45
		1732.5	21.38	20.38
		1720.0	21.35	20.40

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

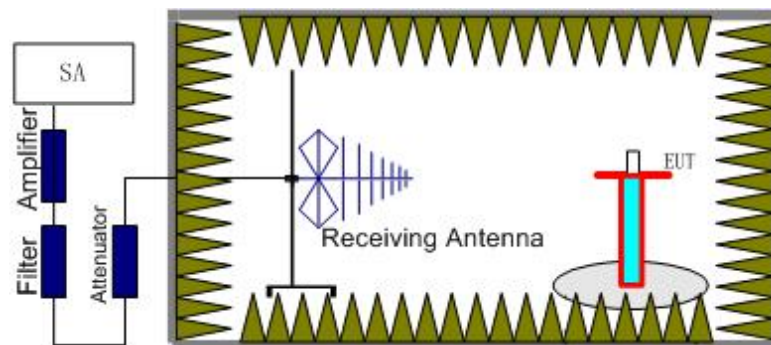

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

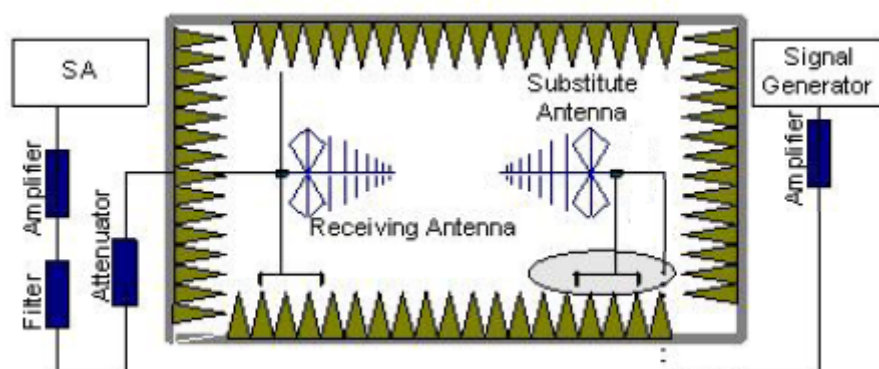

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

LTE Band 2- EIRP 24.232(b)

Test Condition:

RBW	VBW
20MHz	30MHz

Limits: $\leq 33\text{dBm}$ (2W)

Measurement result

LTE Band 2_1.4MHz-QPSK

Frequency (MHz)	P _{mea} (dBm)	Cable Loss(dB)	P _{ag} (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-32.41	3.18	-50.00	-4.56	18.97	33.00	14.03	H
1880.00	-30.06	3.11	-50.00	-4.43	21.26	33.00	11.74	H
1909.30	-29.82	3.18	-50.00	-4.30	21.30	33.00	11.70	H

LTE Band 2_1.4MHz-16QAM

Frequency (MHz)	P _{mea} (dBm)	Cable Loss(dB)	P _{ag} (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-32.50	3.18	-50.00	-4.56	18.88	33.00	14.12	H
1880.00	-30.56	3.11	-50.00	-4.43	20.76	33.00	12.24	H
1909.30	-29.98	3.18	-50.00	-4.30	21.14	33.00	11.86	H

LTE Band 2_3MHz-QPSK

Frequency (MHz)	P _{mea} (dBm)	Cable Loss(dB)	P _{ag} (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-32.26	3.18	-50.00	-4.55	19.11	33.00	13.89	H
1880.00	-29.85	3.11	-50.00	-4.43	21.47	33.00	11.53	H
1908.50	-29.47	3.18	-50.00	-4.30	21.65	33.00	11.35	H

LTE Band 2_3MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-32.54	3.18	-50.00	-4.55	18.83	33.00	14.17	H
1880.00	-30.25	3.11	-50.00	-4.43	21.07	33.00	11.93	H
1908.50	-29.52	3.18	-50.00	-4.30	21.60	33.00	11.40	H

LTE Band 2_5MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-32.35	3.18	-50.00	-4.55	19.02	33.00	13.98	H
1880.00	-30.08	3.11	-50.00	-4.43	21.24	33.00	11.76	H
1907.50	-29.53	3.18	-50.00	-4.31	21.60	33.00	11.40	H

LTE Band 2_5MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-32.79	3.18	-50.00	-4.55	18.58	33.00	14.42	H
1880.00	-30.34	3.11	-50.00	-4.43	20.98	33.00	12.02	H
1907.50	-29.43	3.18	-50.00	-4.31	21.70	33.00	11.30	H

LTE Band 2_10MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-32.65	3.16	-50.00	-4.54	18.73	33.00	14.27	H
1880.00	-30.75	3.11	-50.00	-4.43	20.57	33.00	12.43	H
1905.00	-29.75	3.17	-50.00	-4.32	21.40	33.00	11.60	H

LTE Band 2_10MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-33.33	3.16	-50.00	-4.54	18.05	33.00	14.95	H
1880.00	-30.97	3.11	-50.00	-4.43	20.35	33.00	12.65	H
1905.00	-30.16	3.17	-50.00	-4.32	20.99	33.00	12.01	H

LTE Band 2_15MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-33.38	3.15	-50.00	-4.53	18.00	33.00	15.00	H
1880.00	-31.36	3.11	-50.00	-4.43	19.96	33.00	13.04	H
1902.50	-30.77	3.16	-50.00	-4.33	20.40	33.00	12.60	H

LTE Band 2_15MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-33.43	3.15	-50.00	-4.53	17.95	33.00	15.05	H
1880.00	-31.94	3.11	-50.00	-4.43	19.38	33.00	13.62	H
1902.50	-31.27	3.16	-50.00	-4.33	19.90	33.00	13.10	H

LTE Band 2_20MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-34.38	3.14	-50.00	-4.52	17.00	33.00	16.00	H
1880.00	-32.25	3.11	-50.00	-4.43	19.07	33.00	13.93	H
1900.00	-31.98	3.16	-50.00	-4.34	19.20	33.00	13.80	H

LTE Band 2_20MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-34.71	3.14	-50.00	-4.52	16.67	33.00	16.33	H
1880.00	-32.62	3.11	-50.00	-4.43	18.70	33.00	14.30	H
1900.00	-32.03	3.16	-50.00	-4.34	19.15	33.00	13.85	H

Frequency: 1907.50 MHz

Peak EIRP(dBm)=P_{Mea}(-29.43dBm) - P_{cl}(3.18dB) - P_{Ag}(-50.00dB)-G_a(-4.31dB)= 21.70dBm

LTE Band 4- EIRP 27.50(d)
Test Condition:

RBW	VBW
20MHz	30MHz

Limits: ≤30dBm (1W)

Measurement result
LTE Band 4_1.4MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-35.08	2.96	-50.00	-5.17	17.13	30.00	12.87	H
1732.50	-34.78	2.99	-50.00	-5.08	17.31	30.00	12.69	H
1754.30	-34.45	3.01	-50.00	-4.98	17.52	30.00	12.48	H

LTE Band 4_1.4MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-35.53	2.96	-50.00	-5.17	16.68	30.00	13.32	H
1732.50	-35.06	2.99	-50.00	-5.08	17.03	30.00	12.97	H
1754.30	-34.82	3.01	-50.00	-4.98	17.15	30.00	12.85	H

LTE Band 4_3MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-35.17	2.96	-50.00	-5.17	17.04	30.00	12.96	H
1732.50	-34.69	2.99	-50.00	-5.08	17.40	30.00	12.60	H
1753.50	-34.46	3.01	-50.00	-4.98	17.51	30.00	12.49	H

LTE Band 4_3MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-35.66	2.96	-50.00	-5.17	16.55	30.00	13.45	H
1732.50	-34.90	2.99	-50.00	-5.08	17.19	30.00	12.81	H
1753.50	-34.76	3.01	-50.00	-4.98	17.21	30.00	12.79	H

LTE Band 4_5MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-35.23	2.97	-50.00	-5.17	16.97	30.00	13.03	H
1732.50	-34.90	2.99	-50.00	-5.08	17.19	30.00	12.81	H
1752.50	-34.38	3.01	-50.00	-4.99	17.60	30.00	12.40	H

LTE Band 4_5MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-35.68	2.97	-50.00	-5.17	16.52	30.00	13.48	H
1732.50	-34.78	2.99	-50.00	-5.08	17.31	30.00	12.69	H
1752.50	-34.80	3.01	-50.00	-4.99	17.18	30.00	12.82	H

LTE Band 4_10MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-35.63	2.97	-50.00	-5.15	16.55	30.00	13.45	H
1732.50	-35.39	2.99	-50.00	-5.08	16.70	30.00	13.30	H
1750.00	-34.86	3.00	-50.00	-5.00	17.14	30.00	12.86	H

LTE Band 4_10MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-36.23	2.97	-50.00	-5.15	15.95	30.00	14.05	H
1732.50	-35.63	2.99	-50.00	-5.08	16.46	30.00	13.54	H
1750.00	-35.60	3.00	-50.00	-5.00	16.40	30.00	13.60	H

LTE Band 4_15MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-36.76	2.97	-50.00	-5.14	15.41	30.00	14.59	H
1732.50	-36.21	2.99	-50.00	-5.08	15.88	30.00	14.12	H
1747.50	-35.99	3.00	-50.00	-5.01	16.02	30.00	13.98	H

LTE Band 4_15MHz-16QAM

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-37.43	2.97	-50.00	-5.14	14.74	30.00	15.26	H
1732.50	-36.70	2.99	-50.00	-5.08	15.39	30.00	14.61	H
1747.50	-36.58	3.00	-50.00	-5.01	15.43	30.00	14.57	H

LTE Band 4_20MHz-QPSK

Frequency (MHz)	Pmea (dBm)	Cable Loss(dB)	Pag (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-38.16	2.97	-50.00	-5.13	14.00	30.00	16.00	H
1732.50	-37.03	2.99	-50.00	-5.08	15.06	30.00	14.94	H
1745.00	-37.16	3.00	-50.00	-5.02	14.86	30.00	15.14	H

LTE Band 4_20MHz-16QAM

Frequency (MHz)	P _{mea} (dBm)	Cable Loss(dB)	P _{ag} (dB)	Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-38.34	2.97	-50.00	-5.13	13.82	30.00	16.18	H
1732.50	-37.36	2.99	-50.00	-5.08	14.73	30.00	15.27	H
1745.00	-37.73	3.00	-50.00	-5.02	14.29	30.00	15.71	H

Frequency: 1752.50MHz

Peak EIRP(dBm)=P_{Mea}(-34.38dBm) - P_{cl}(3.01dB) - P_{Ag}(-50.00dB)-G_a(-4.99dB)= 17.60 dBm

A.2 EMISSION LIMIT

Reference


FCC: CFR Part 2.1051, 24.238(a), 27.53(h).

A.2.1 Measurement Method


The measurements procedures in TIA-603C-2004 are used. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of LTE Band 2, Band 4.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

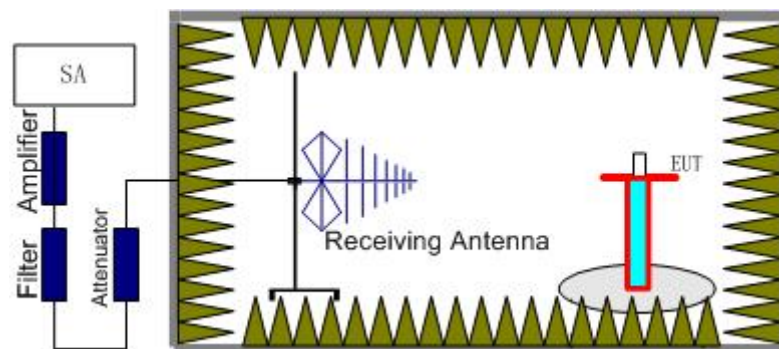

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

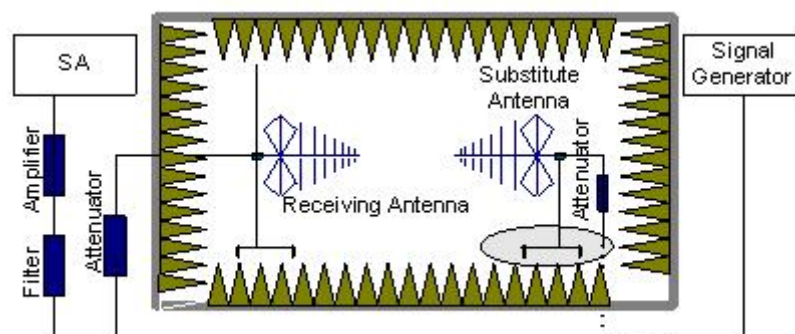

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3700.59	-55.42	4.44	-8.14	-51.72	-13.00	38.72	H
5550.79	-40.34	5.46	-10.02	-35.78	-13.00	22.78	H
7401.20	-48.15	6.42	-11.34	-43.23	-13.00	30.23	H
9251.28	-51.70	7.65	-12.60	-46.75	-13.00	33.75	H
10142.63	-59.43	7.91	-12.43	-54.91	-13.00	41.91	H
11820.79	-57.39	8.80	-12.46	-53.73	-13.00	40.73	V

LTE Band 2, 1.4MHz, 16QAM, Channel 18607

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5551.00	-40.57	5.46	-10.02	-36.01	-13.00	23.01	H
7401.41	-48.59	6.42	-11.34	-43.67	-13.00	30.67	H
9251.17	-53.31	7.65	-12.60	-48.36	-13.00	35.36	V
10349.01	-59.60	7.99	-12.47	-55.12	-13.00	42.12	H
11873.37	-57.75	8.55	-12.47	-53.83	-13.00	40.83	V
13572.01	-56.54	9.22	-13.83	-51.93	-13.00	38.93	V

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5638.60	-39.42	5.45	-10.06	-34.81	-13.00	21.81	H
7518.20	-45.19	6.79	-11.42	-40.56	-13.00	27.56	H
9063.01	-61.18	7.53	-12.60	-56.11	-13.00	43.11	H
10344.19	-59.35	7.98	-12.47	-54.86	-13.00	41.86	H
11277.29	-49.80	8.52	-12.40	-45.92	-13.00	32.92	H
13160.28	-56.27	9.14	-13.46	-51.95	-13.00	38.95	V

LTE Band 2, 1.4MHz, 16QAM, Channel 18900

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3758.91	-57.50	4.53	-8.21	-53.82	-13.00	40.82	H
5638.63	-41.26	5.45	-10.06	-36.65	-13.00	23.65	H
7518.16	-47.46	6.79	-11.42	-42.83	-13.00	29.83	H
10129.73	-58.43	7.98	-12.43	-53.98	-13.00	40.98	V
11277.12	-54.78	8.52	-12.40	-50.90	-13.00	37.90	H
13531.67	-56.93	9.47	-13.81	-52.59	-13.00	39.59	V

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3817.72	-57.40	4.49	-8.28	-53.61	-13.00	40.61	H
5726.54	-36.52	5.54	-10.09	-31.97	-13.00	18.97	H
7635.44	-45.60	6.78	-11.54	-40.84	-13.00	27.84	V
9544.30	-53.99	7.77	-12.58	-49.18	-13.00	36.18	V
11453.27	-42.25	8.64	-12.40	-38.49	-13.00	25.49	H
13674.97	-57.65	8.96	-13.87	-52.74	-13.00	39.74	H

LTE Band 2, 1.4MHz, 16QAM, Channel 19193

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3817.71	-56.08	4.49	-8.28	-52.29	-13.00	39.29	H
5726.70	-37.45	5.54	-10.09	-32.90	-13.00	19.90	H
7635.52	-46.86	6.78	-11.54	-42.10	-13.00	29.10	H
10202.23	-59.73	7.65	-12.44	-54.94	-13.00	41.94	H
11453.08	-43.29	8.64	-12.40	-39.53	-13.00	26.53	H
13589.07	-58.20	9.23	-13.84	-53.59	-13.00	40.59	V

LTE Band 4, 1.4MHz, QPSK, Channel 19957

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3420.38	-54.65	4.19	-7.71	-51.13	-13.00	38.13	H
5130.72	-45.29	5.25	-9.78	-40.76	-13.00	27.76	H
6840.89	-45.13	6.17	-10.94	-40.36	-13.00	27.36	H
8855.35	-59.81	7.31	-12.48	-54.64	-13.00	41.64	H
10228.71	-57.41	7.50	-12.45	-52.46	-13.00	39.46	H
11971.75	-42.25	8.59	-12.49	-38.35	-13.00	25.35	H

LTE Band 4, 1.4MHz, 16QAM, Channel 19957

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3420.47	-56.08	4.19	-7.71	-52.56	-13.00	39.56	H
5130.91	-46.26	5.25	-9.78	-41.73	-13.00	28.73	H
6841.03	-44.97	6.17	-10.94	-40.20	-13.00	27.20	H
8551.10	-57.80	7.28	-12.24	-52.84	-13.00	39.84	V
10374.23	-59.90	8.06	-12.47	-55.49	-13.00	42.49	V
11971.93	-43.31	8.59	-12.49	-39.41	-13.00	26.41	H

LTE Band 4, 1.4MHz, QPSK, Channel 20175

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3464.21	-49.83	4.24	-7.81	-46.26	-13.00	33.26	H
5130.78	-64.20	5.25	-9.78	-59.67	-13.00	46.67	V
7153.37	-60.77	6.36	-11.19	-55.94	-13.00	42.94	V
7962.92	-61.90	6.95	-11.86	-56.99	-13.00	43.99	V
8952.84	-59.31	7.34	-12.56	-54.09	-13.00	41.09	H
10151.46	-60.06	7.86	-12.43	-55.49	-13.00	42.49	V

LTE Band 4, 1.4MHz, 16QAM, Channel 20175

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3464.12	-50.13	4.24	-7.81	-46.56	-13.00	33.56	H
5196.50	-54.61	5.22	-9.82	-50.01	-13.00	37.01	H
6872.01	-60.07	6.07	-10.97	-55.17	-13.00	42.17	H
8660.43	-61.32	7.44	-12.33	-56.43	-13.00	43.43	V
10173.31	-59.50	7.77	-12.43	-54.84	-13.00	41.84	V
12124.42	-50.38	8.81	-12.55	-46.64	-13.00	33.64	H

LTE Band 4, 1.4MHz, QPSK, Channel 20393

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3507.58	-51.24	4.32	-7.91	-47.65	-13.00	34.65	H
5261.58	-44.02	5.30	-9.86	-39.46	-13.00	26.46	H
6983.85	-62.21	6.24	-11.08	-57.37	-13.00	44.37	V
9064.81	-60.36	7.53	-12.60	-55.29	-13.00	42.29	H
10173.01	-59.26	7.77	-12.43	-54.60	-13.00	41.60	H
12276.79	-44.02	8.86	-12.61	-40.27	-13.00	27.27	H

LTE Band 4, 1.4MHz, 16QAM, Channel 20393

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3507.58	-52.05	4.32	-7.91	-48.46	-13.00	35.46	H
5261.53	-44.32	5.30	-9.86	-39.76	-13.00	26.76	H
7015.25	-54.37	6.34	-11.11	-49.60	-13.00	36.60	H
8616.85	-61.71	7.45	-12.29	-56.87	-13.00	43.87	H
10475.44	-59.58	8.02	-12.50	-55.10	-13.00	42.10	H
12276.94	-42.87	8.86	-12.61	-39.12	-13.00	26.12	H

A.3 CONDUCTED EMISSION

Reference

FCC: CFR Part 15.107/207


The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

A.3.2 Measurement result

LTE Band 2-AE3

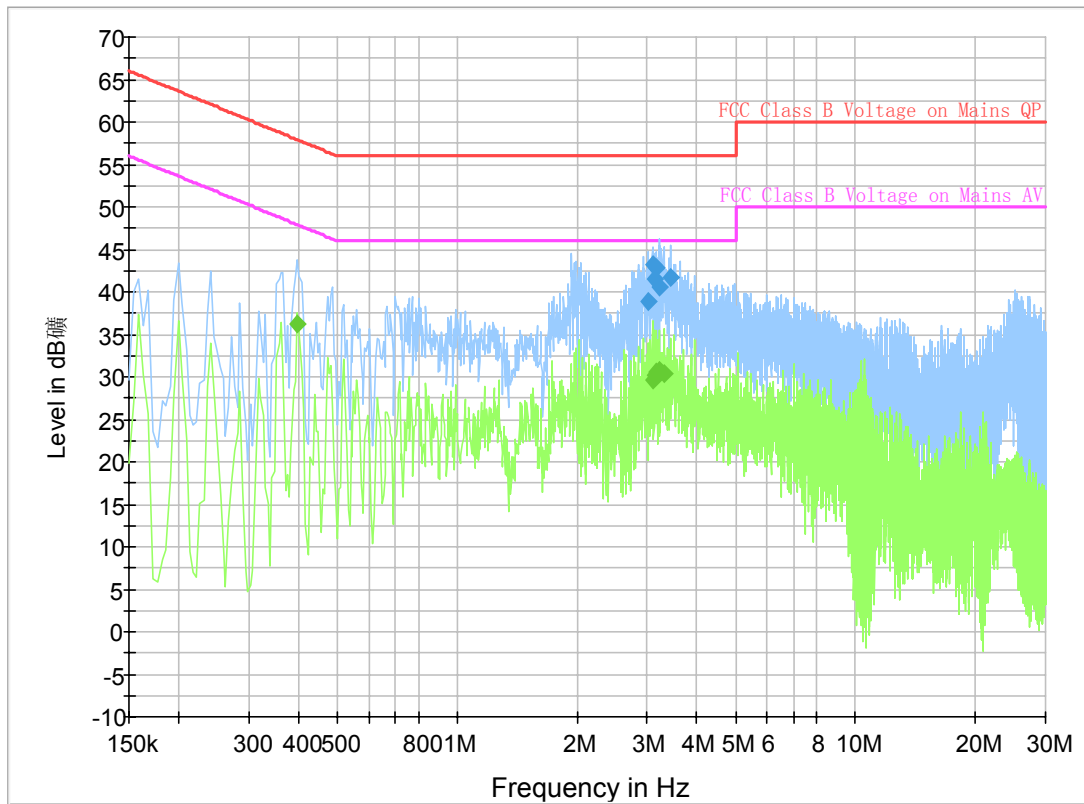


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.025500	38.9	GND	L1	9.7	17.1	56.0
3.088500	43.3	GND	L1	9.7	12.7	56.0
3.142500	41.4	GND	L1	9.7	14.6	56.0
3.169500	42.8	GND	L1	9.7	13.2	56.0
3.228000	40.6	GND	L1	9.7	15.4	56.0
3.430500	41.7	GND	L1	9.7	14.3	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.397500	36.3	GND	L1	9.8	11.6	47.9
3.088500	29.7	GND	L1	9.7	16.3	46.0
3.133500	30.2	GND	L1	9.7	15.8	46.0
3.169500	30.5	GND	L1	9.7	15.5	46.0
3.219000	30.7	GND	L1	9.7	15.3	46.0
3.300000	30.4	GND	L1	9.7	15.6	46.0

LTE Band 2-AE4

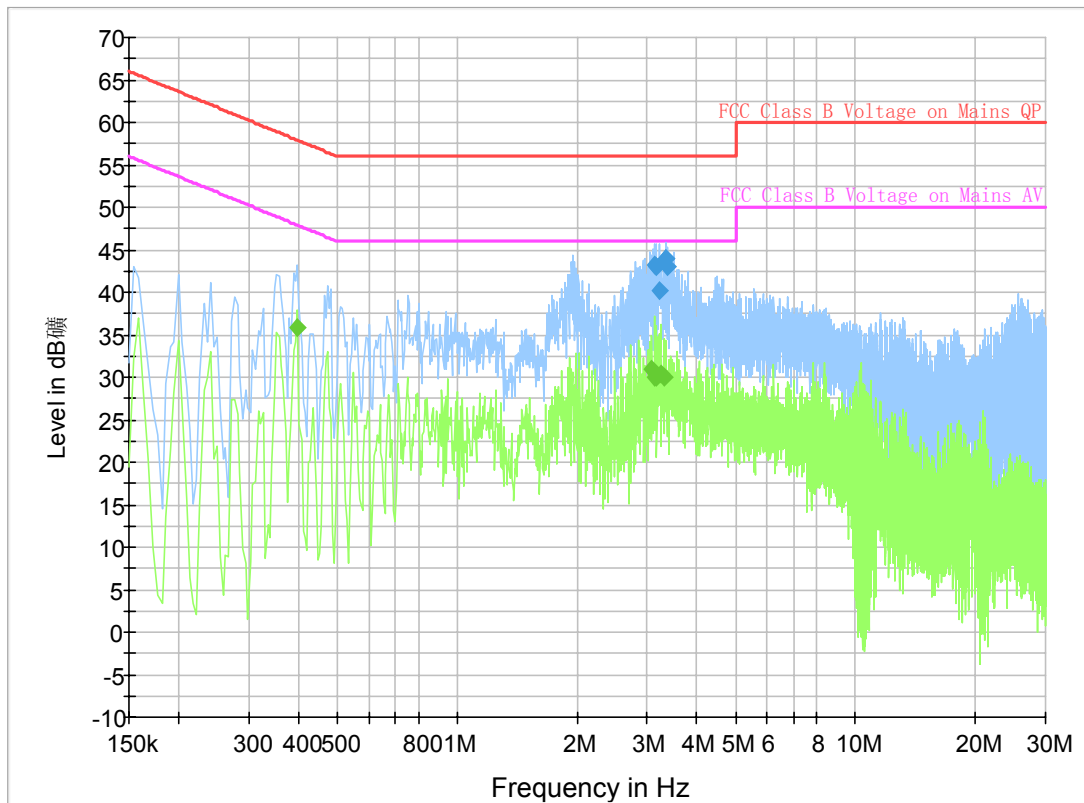


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.129000	43.2	GND	L1	9.7	12.8	56.0
3.156000	42.9	GND	L1	9.7	13.1	56.0
3.214500	40.1	GND	L1	9.7	15.9	56.0
3.340500	43.9	GND	L1	9.7	12.1	56.0
3.354000	43.9	GND	L1	9.7	12.1	56.0
3.381000	43.0	GND	L1	9.7	13.0	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.397500	35.8	GND	L1	9.8	12.1	47.9
3.084000	31.0	GND	L1	9.7	15.0	46.0
3.129000	30.0	GND	L1	9.7	16.0	46.0
3.165000	30.0	GND	L1	9.7	16.0	46.0
3.237000	30.5	GND	L1	9.7	15.5	46.0
3.318000	30.0	GND	L1	9.7	16.0	46.0

LTE Band 4-AE3

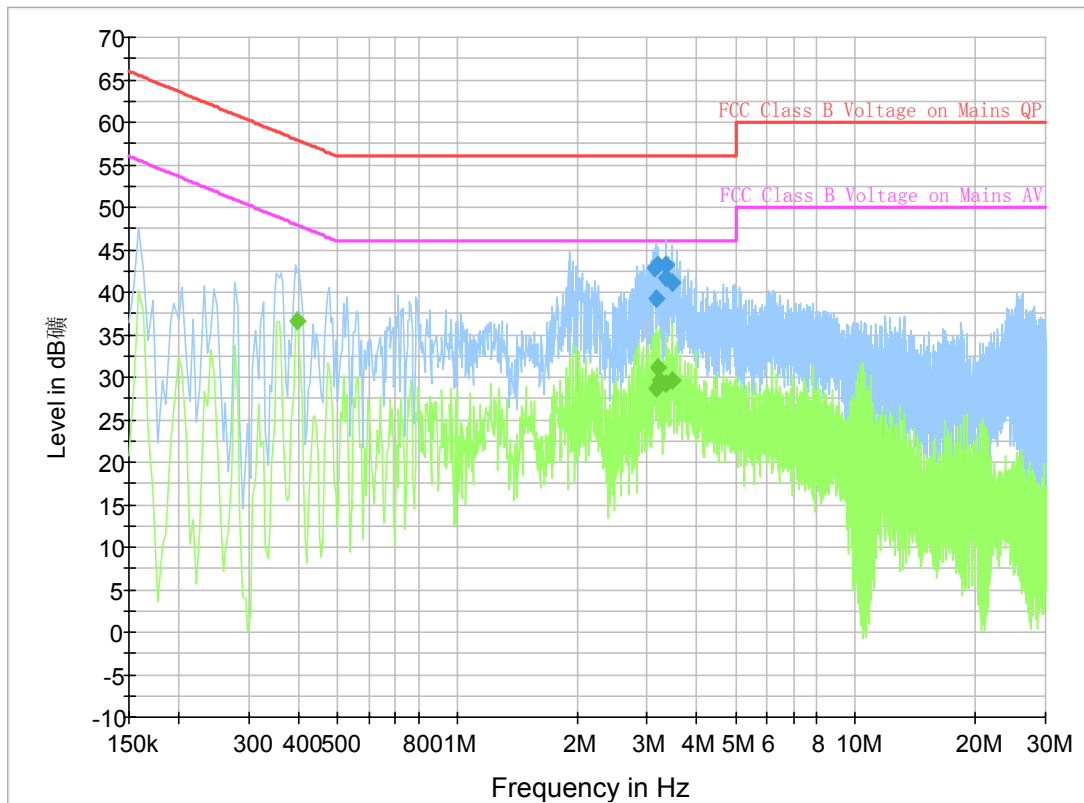


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.138000	42.9	GND	L1	9.7	13.1	56.0
3.151500	39.2	GND	L1	9.7	16.8	56.0
3.178500	43.3	GND	L1	9.7	12.7	56.0
3.327000	41.6	GND	L1	9.7	14.4	56.0
3.354000	43.2	GND	L1	9.7	12.8	56.0
3.471000	41.1	GND	L1	9.7	14.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.397500	36.5	GND	L1	9.8	11.4	47.9
3.151500	28.7	GND	L1	9.7	17.3	46.0
3.178500	31.1	GND	L1	9.7	14.9	46.0
3.210000	29.7	GND	L1	9.7	16.3	46.0
3.354000	29.2	GND	L1	9.7	16.8	46.0
3.471000	29.5	GND	L1	9.7	16.5	46.0

LTE Band 4-AE4

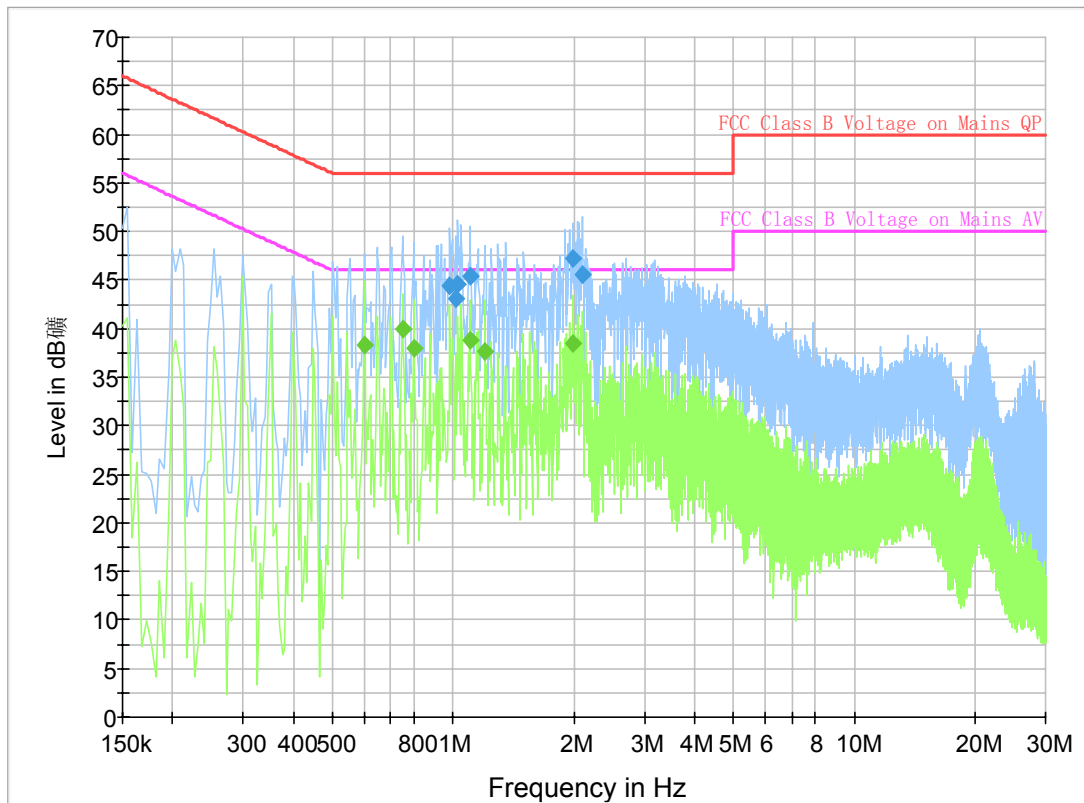


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.982500	44.4	GND	L1	9.7	11.6	56.0
1.014000	43.1	GND	L1	9.7	13.0	56.0
1.027500	44.6	GND	L1	9.7	11.4	56.0
1.104000	45.4	GND	L1	9.7	10.6	56.0
1.995000	47.3	GND	L1	9.7	8.7	56.0
2.098500	45.5	GND	L1	9.7	10.5	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.600000	38.2	GND	L1	9.8	7.8	46.0
0.748500	39.9	GND	L1	9.8	6.1	46.0
0.798000	38.0	GND	L1	9.8	8.0	46.0
1.099500	38.9	GND	L1	9.7	7.1	46.0
1.198500	37.6	GND	L1	9.7	8.4	46.0
1.995000	38.4	GND	L1	9.7	7.6	46.0


MP3

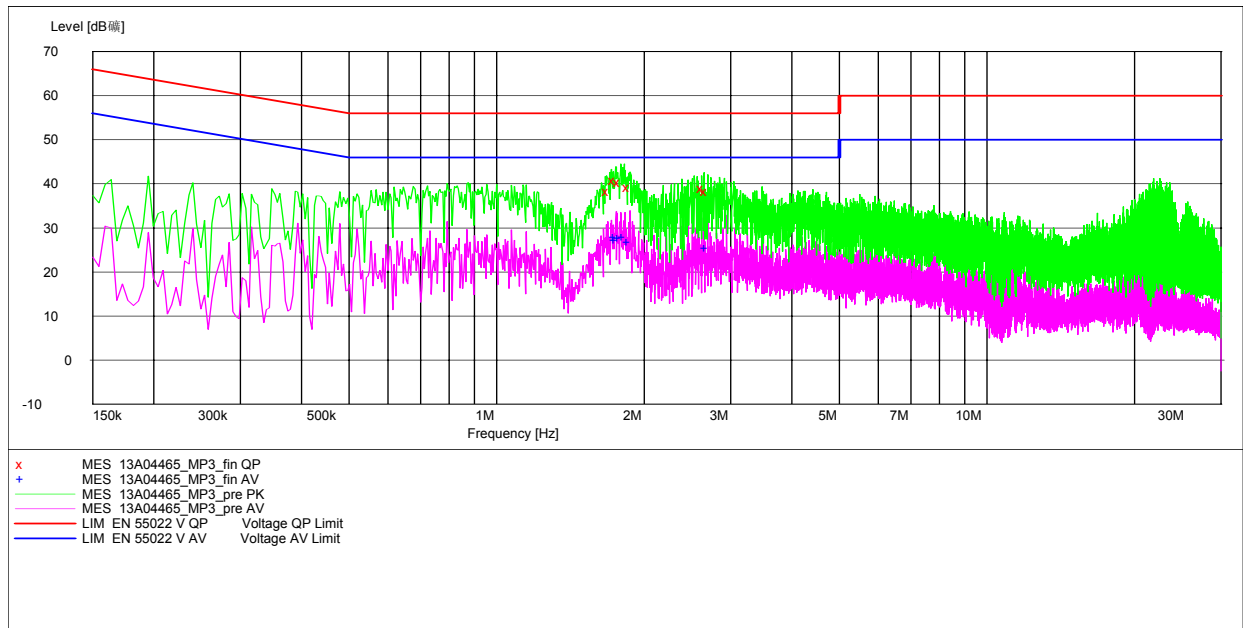

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.698000	38.30	9.7	56	17.7	L1	GND
1.747500	40.70	9.7	56	15.3	L1	GND
1.792500	40.30	9.7	56	15.7	N	GND
1.869000	39.30	9.7	56	16.7	N	GND
2.648000	39.10	9.7	56	16.9	L1	GND
2.693000	38.30	9.7	56	17.7	L1	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.752000	27.90	9.7	46	18.1	N	GND
1.761000	27.10	9.7	46	18.9	L1	GND
1.792500	27.60	9.7	46	18.4	L1	GND
1.828500	27.80	9.7	46	18.2	L1	GND
1.869000	26.80	9.7	46	19.2	N	GND
2.693000	25.30	9.7	46	20.7	L1	GND

CAMERA

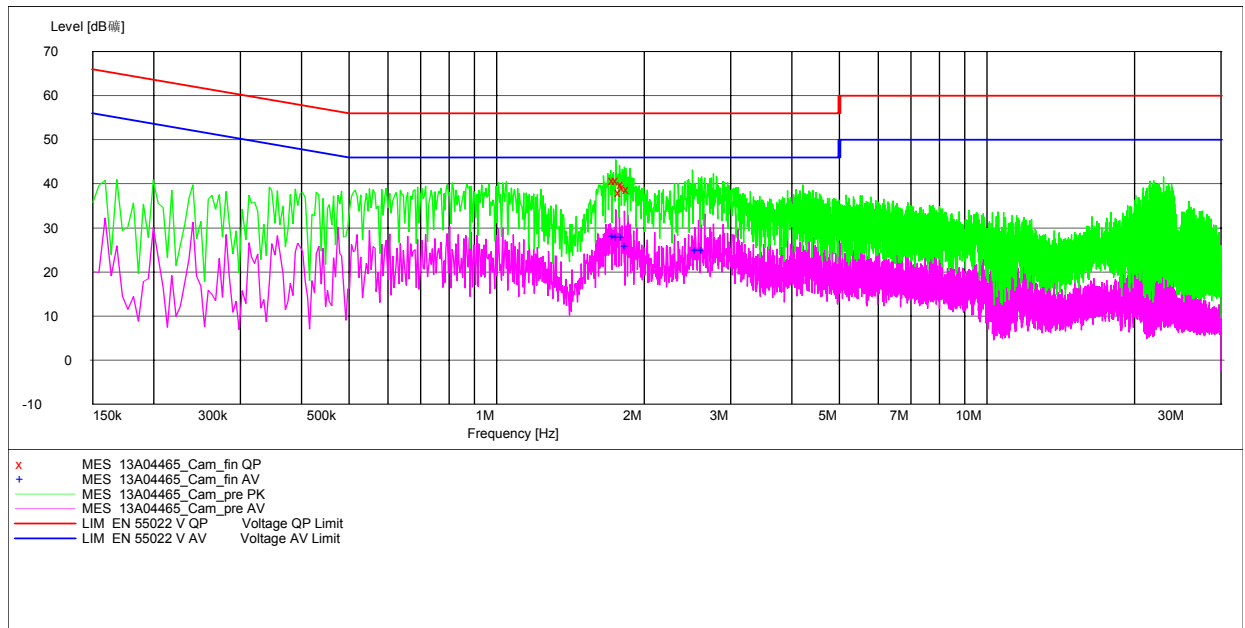

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.747500	40.70	9.7	56	15.3	L1	GND
1.779000	40.70	9.7	56	15.3	L1	GND
1.801500	38.00	9.7	56	18.0	L1	GND
1.824000	39.90	9.7	56	16.1	N	GND
1.833000	39.30	9.7	56	16.7	N	GND
1.869000	38.70	9.7	56	17.3	N	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.747500	28.00	9.7	46	18.0	N	GND
1.779000	27.80	9.7	46	18.2	L1	GND
1.824000	27.90	9.7	46	18.1	L1	GND
1.855500	25.90	9.7	46	20.1	L1	GND
2.580500	24.80	9.7	46	21.2	L1	GND
2.652500	24.90	9.7	46	21.1	L1	GND

A.4 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 24.235, 27.54.

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 661 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.9VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -5.4 % and +10.8 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

LTE Band 2, 1.4MHz

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-9	7	0.005	0.004
3.9	-14	15	0.007	0.008
4.35	-9	27	0.005	0.014

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	-8	13	0.004	0.007
-20	-9	5	0.005	0.003
-10	5	19	0.003	0.010
0	-13	10	0.007	0.005
10	-15	4	0.008	0.002
20	3	21	0.001	0.011
30	-6	19	0.003	0.010
40	-16	0	0.009	0.000
50	2	18	0.001	0.010

LTE Band 2, 3MHz

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-12	-32	0.007	0.017
3.9	9	-5	0.005	0.003
4.35	-10	-16	0.005	0.008

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	6	-24	0.003	0.013
-20	-14	-3	0.008	0.002
-10	3	-9	0.002	0.005
0	-11	-9	0.006	0.005
10	5	-13	0.003	0.007
20	-6	-15	0.003	0.008
30	-14	-17	0.008	0.009
40	-2	-20	0.001	0.011
50	2	-20	0.001	0.010

LTE Band 2, 5MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	5	-4	0.003	0.002
3.9	-1	-4	0.000	0.002
4.35	0	-2	0.000	0.001

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	-5	-4	0.003	0.002
-20	-11	-2	0.006	0.001
-10	-15	-3	0.008	0.002
0	-18	-2	0.009	0.001
10	9	-3	0.005	0.002
20	4	1	0.002	0.001
30	2	0	0.001	0.000
40	-15	-2	0.008	0.001
50	-2	-2	0.001	0.001

LTE Band 2, 10MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	0	-12	0.000	0.006
3.9	-15	-16	0.008	0.008
4.35	-7	-17	0.004	0.009

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	-4	-23	0.002	0.012
-20	0	-15	0.000	0.008
-10	3	-19	0.002	0.010
0	-10	-11	0.005	0.006
10	-1	-8	0.001	0.004
20	-21	-8	0.011	0.004
30	-3	-8	0.002	0.004
40	-7	-4	0.004	0.002
50	-21	-5	0.011	0.003

LTE Band 2, 15MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-10	9	0.005	0.005
3.9	-3	-15	0.001	0.008
4.35	4	-11	0.002	0.006

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	-8	-4	0.004	0.002
-20	8	10	0.004	0.005
-10	-2	-12	0.001	0.006
0	-14	-5	0.007	0.003
10	4	6	0.002	0.003
20	-4	-11	0.002	0.006
30	-9	-6	0.005	0.003
40	-16	-22	0.009	0.012
50	-13	6	0.007	0.003

LTE Band 2, 20MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-18	-17	0.010	0.009
3.9	4	-3	0.002	0.001
4.35	0	-15	0.000	0.008

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	3	-17	0.001	0.009
-20	4	4	0.002	0.002
-10	-18	-8	0.009	0.004
0	-14	-12	0.008	0.007
10	-10	-23	0.005	0.012
20	2	-2	0.001	0.001
30	-18	-12	0.010	0.006
40	-11	-4	0.006	0.002
50	-4	-20	0.002	0.011

LTE Band 4, 1.4MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	2	19	0.001	0.011
3.9	-3	19	0.002	0.011
4.35	-1	23	0.000	0.013

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	4	15	0.002	0.009
-20	-2	20	0.001	0.012
-10	-1	17	0.000	0.010
0	2	22	0.001	0.013
10	-2	24	0.001	0.014
20	6	25	0.004	0.015
30	5	22	0.003	0.012
40	3	26	0.001	0.015
50	3	23	0.002	0.013

LTE Band 4, 3MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	1	-6	0.001	0.004
3.9	4	-4	0.003	0.002
4.35	1	-6	0.001	0.004

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	3	-10	0.002	0.006
-20	1	-4	0.000	0.002
-10	3	-5	0.002	0.003
0	-6	-5	0.003	0.003
10	3	-6	0.002	0.003
20	0	-7	0.000	0.004
30	0	-7	0.000	0.004
40	-1	-3	0.000	0.002
50	2	-9	0.001	0.005

LTE Band 4, 5MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-4	1	0.003	0.001
3.9	-1	-1	0.000	0.000
4.35	0	2	0.000	0.001

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	4	-3	0.003	0.002
-20	3	2	0.002	0.001
-10	-1	0	0.001	0.000
0	10	0	0.006	0.000
10	1	2	0.001	0.001
20	-1	6	0.000	0.003
30	7	-7	0.004	0.004
40	3	2	0.002	0.001
50	4	1	0.002	0.000

LTE Band 4, 10MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	-2	-1	0.001	0.001
3.9	3	-2	0.002	0.001
4.35	-1	1	0.000	0.001

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	2	-4	0.001	0.002
-20	-1	-6	0.001	0.004
-10	1	-3	0.001	0.002
0	5	-5	0.003	0.003
10	4	0	0.002	0.000
20	6	0	0.003	0.000
30	-3	-3	0.002	0.002
40	0	-3	0.000	0.002
50	0	-2	0.000	0.001

LTE Band 4, 15MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	5	-1	0.003	0.001
3.9	4	9	0.002	0.005
4.35	3	8	0.002	0.005

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	6	5	0.004	0.003
-20	5	5	0.003	0.003
-10	9	2	0.005	0.001
0	0	9	0.000	0.005
10	0	5	0.000	0.003
20	6	7	0.003	0.004
30	1	3	0.001	0.002
40	-1	1	0.000	0.001
50	10	5	0.006	0.003

LTE Band 4, 20MHz
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
3.5	1	-1	0.001	0.000
3.9	-4	-4	0.002	0.002
4.35	4	-7	0.002	0.004

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)		Frequency error(ppm)	
Modulation	QPSK	16QAM	QPSK	16QAM
-30	1	-3	0.001	0.002
-20	3	-4	0.002	0.003
-10	-4	-8	0.002	0.004
0	5	-3	0.003	0.002
10	-3	-8	0.002	0.004
20	-4	-1	0.002	0.000
30	2	-3	0.001	0.001
40	2	-4	0.001	0.003
50	-2	2	0.001	0.001

A.5 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)


A.5.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

LTE band 2, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	1091.35	1096.15

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

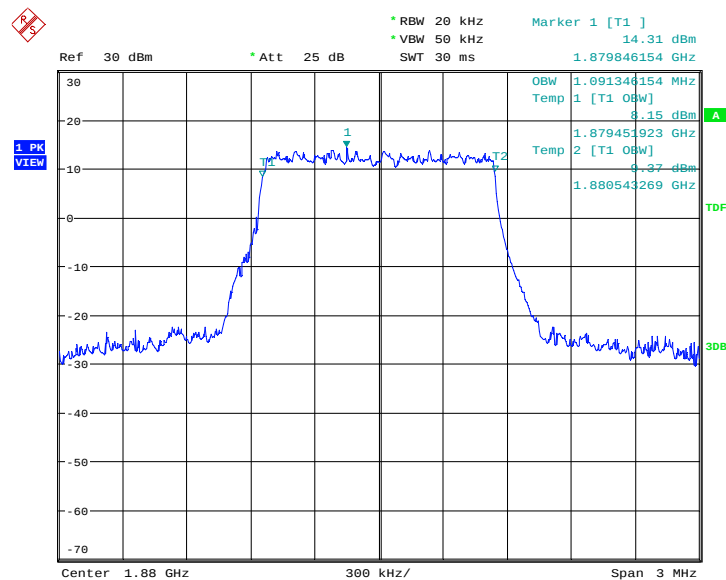

Date: 3.DEC.2013 15:54:17

LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)

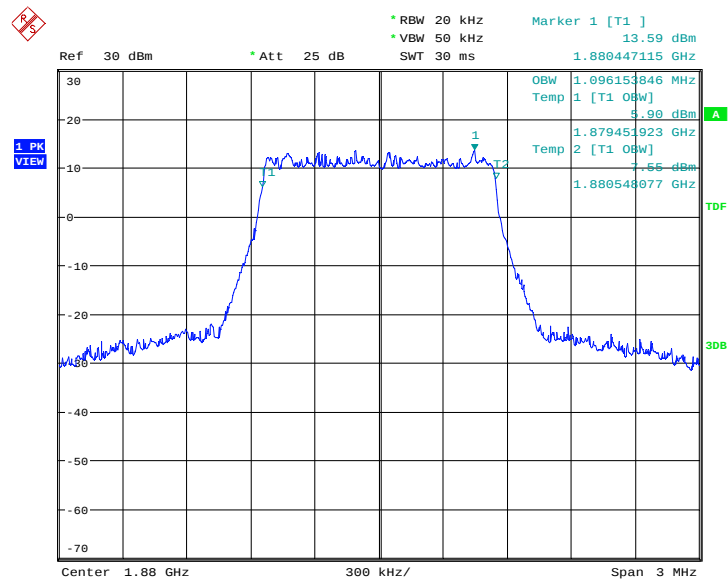


Date: 3.DEC.2013 15:54:30

LTE band 2, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	2692.31	2692.31

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

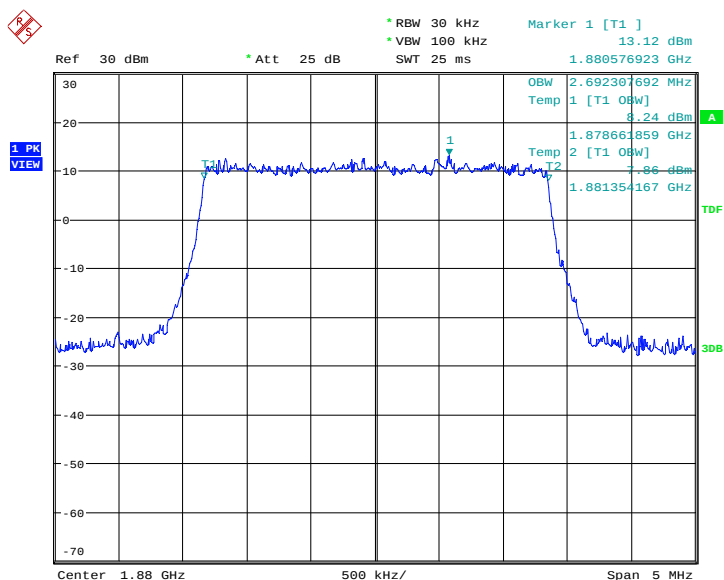

Date: 3.DEC.2013 16:19:57

LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)

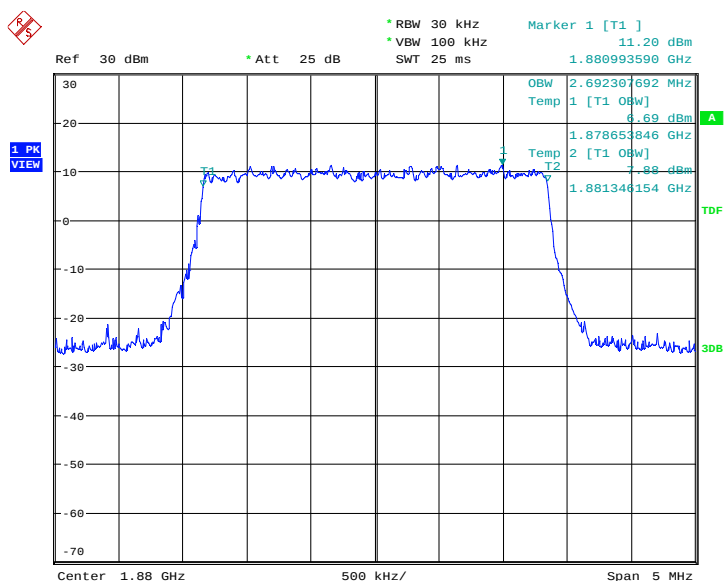


Date: 3.DEC.2013 16:20:10

LTE band 2, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4487.18	4471.15

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

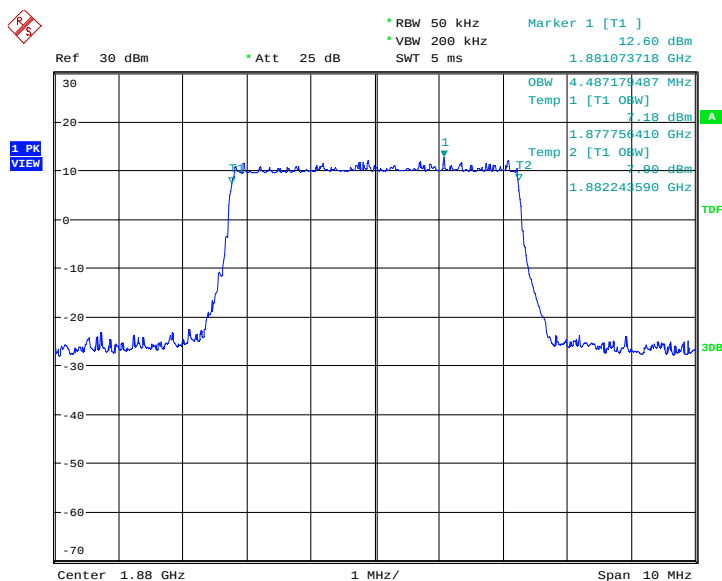

Date: 3.DEC.2013 16:45:38

LTE band 2, 5MHz Bandwidth,16QAM (99% BW)

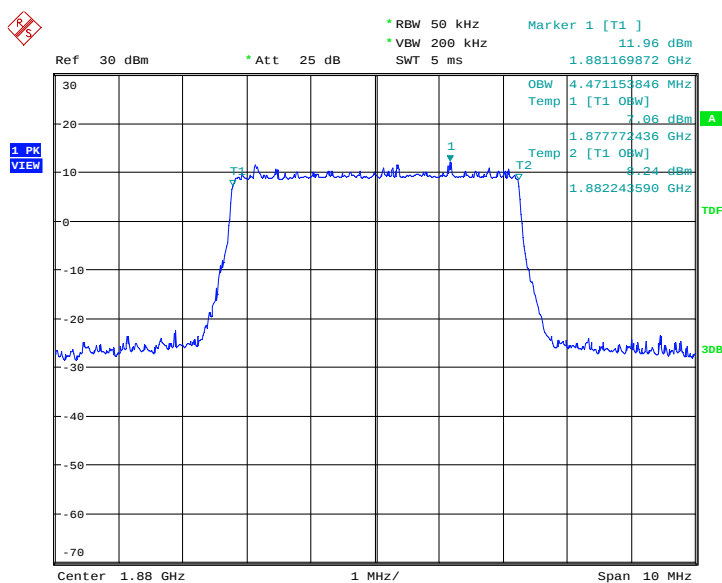


Date: 3.DEC.2013 16:45:51

LTE band 2, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	8942.31	8942.31

LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

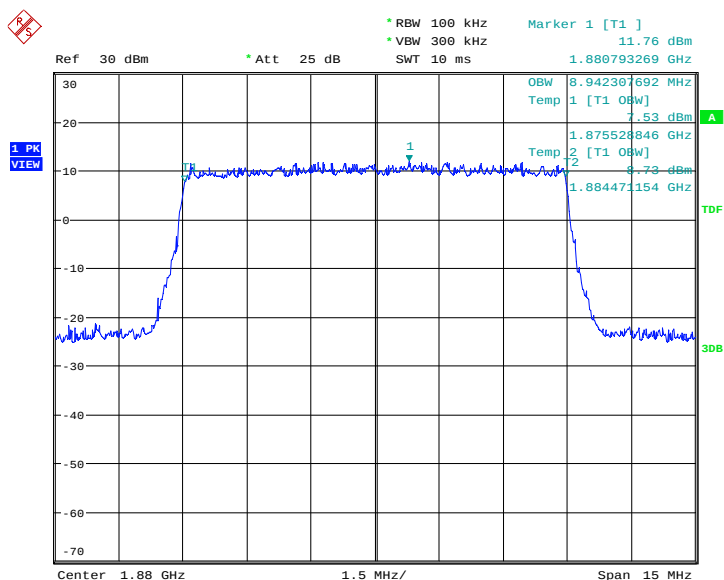

Date: 4.DEC.2013 18:43:18

LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)

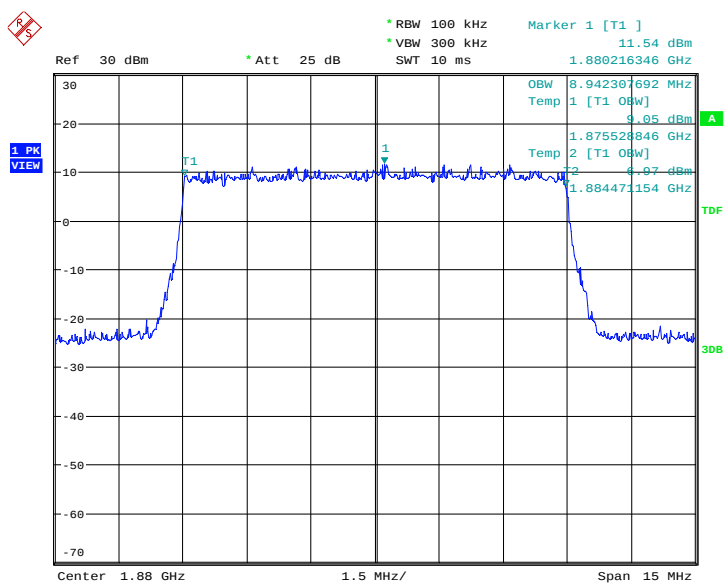


Date: 4.DEC.2013 18:43:31

LTE band 2, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	13429.49	13461.54

LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

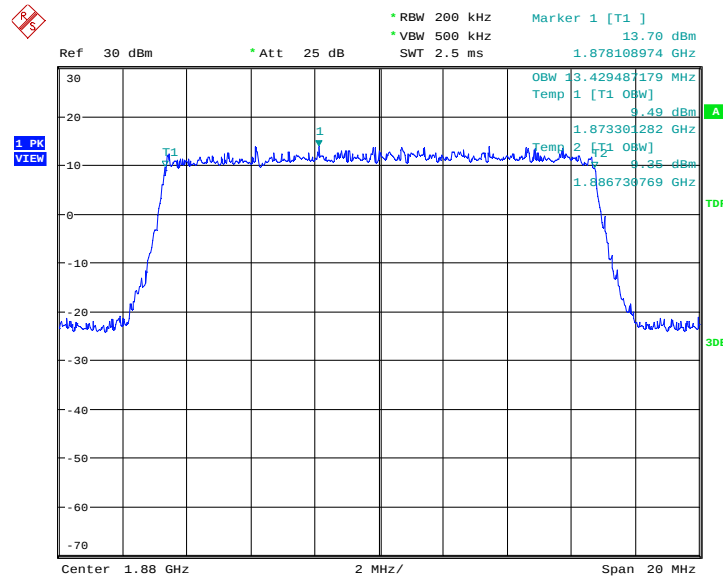

Date: 4.DEC.2013 18:26:02

LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)

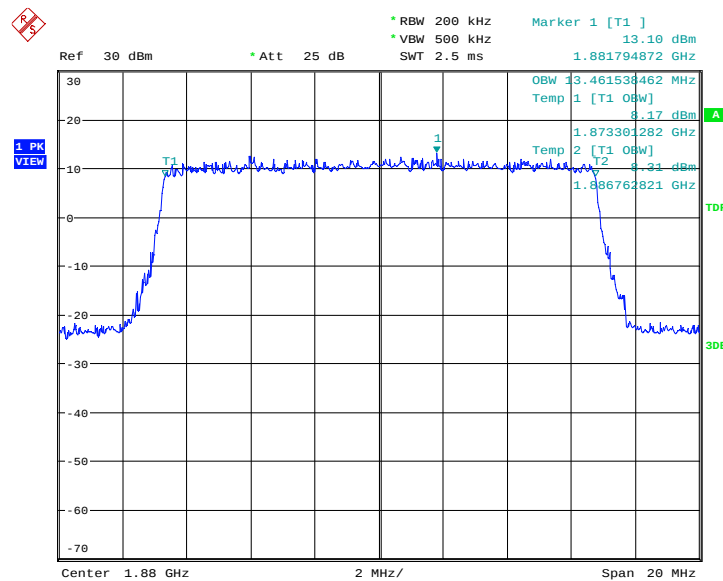


Date: 4.DEC.2013 18:26:16

LTE band 2, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	17884.62	17836.54

LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

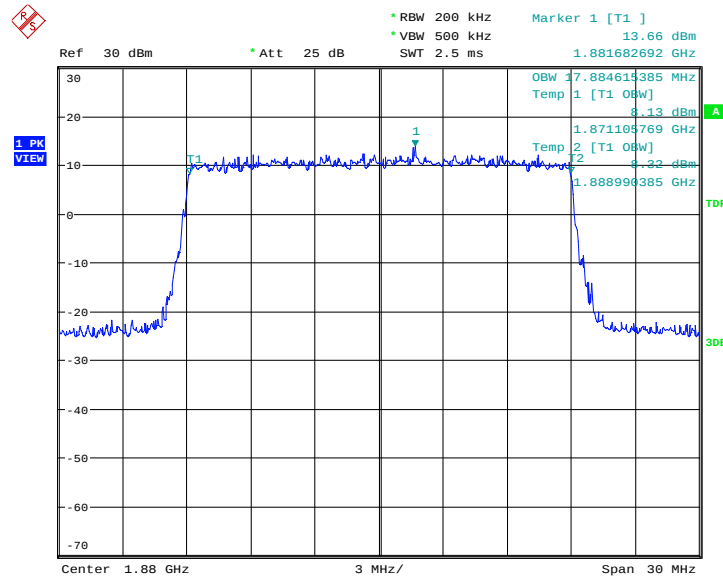

Date: 4.DEC.2013 19:04:07

LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)

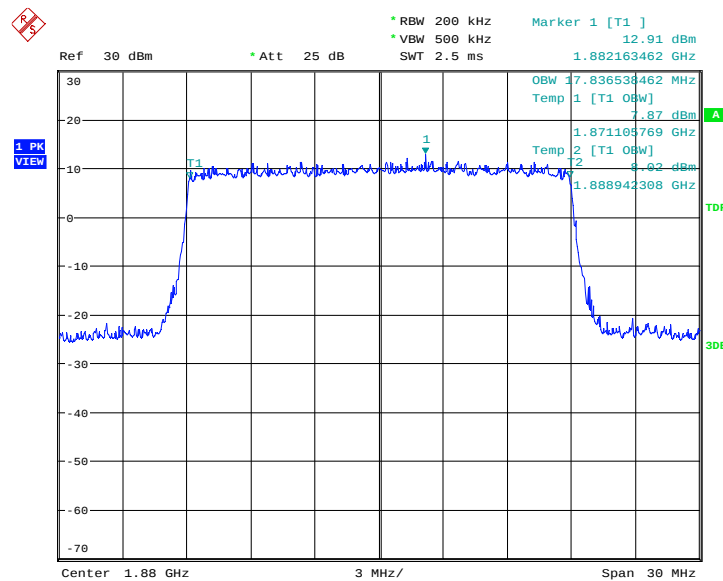


Date: 4.DEC.2013 19:04:21

LTE band 4, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	1091.35	1096.15

LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)

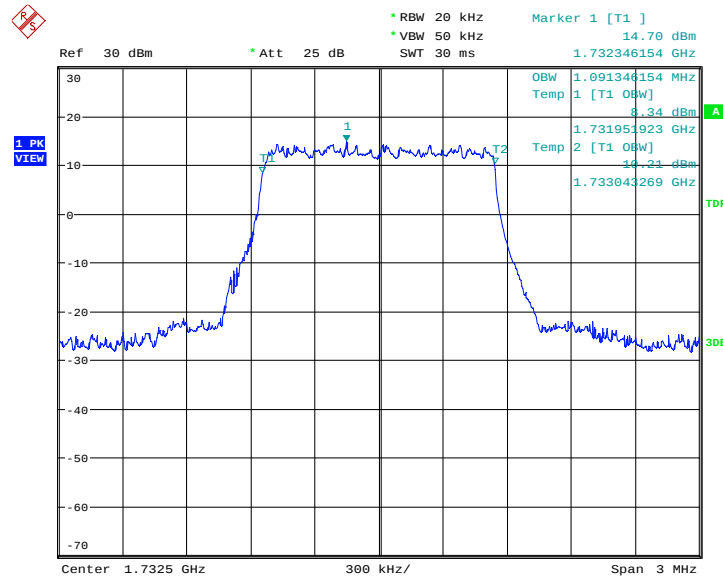

Date: 4.DEC.2013 16:00:56

LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)

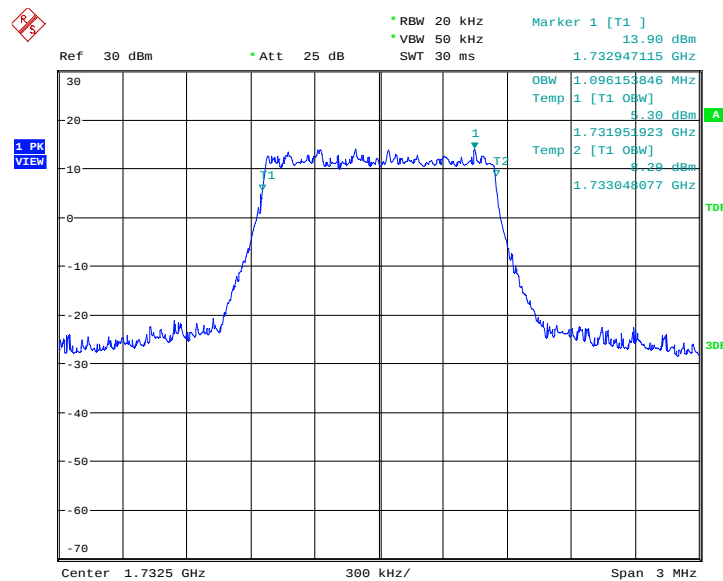


Date: 4.DEC.2013 16:01:09

LTE band 4, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	2692.31	2692.31

LTE band 4, 3MHz Bandwidth, QPSK (99% BW)

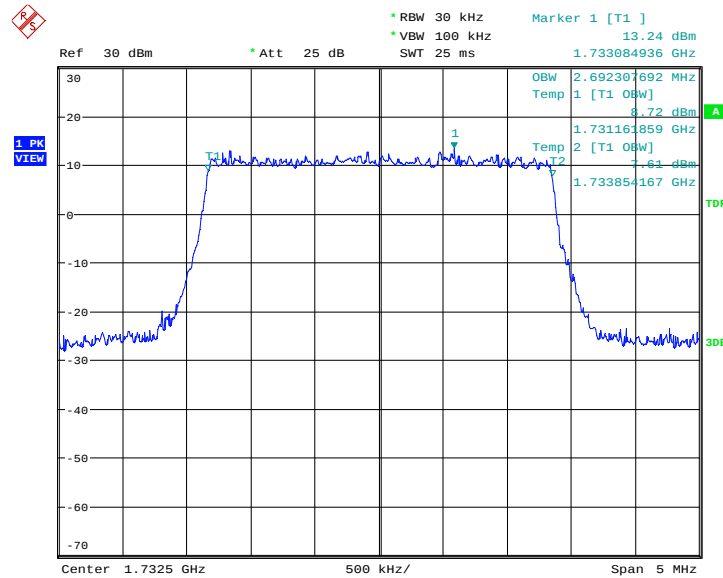

Date: 4.DEC.2013 16:33:54

LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)

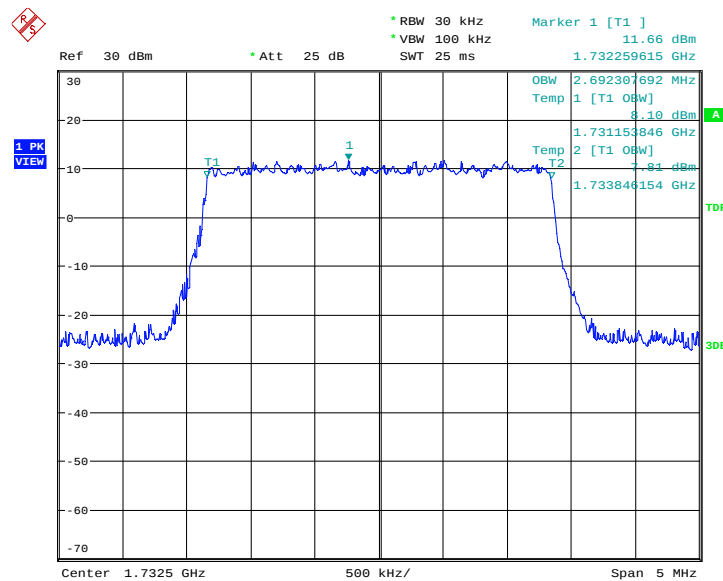


Date: 4.DEC.2013 16:34:08

LTE band 4, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	4487.18	4487.18

LTE band 4, 5MHz Bandwidth, QPSK (99% BW)

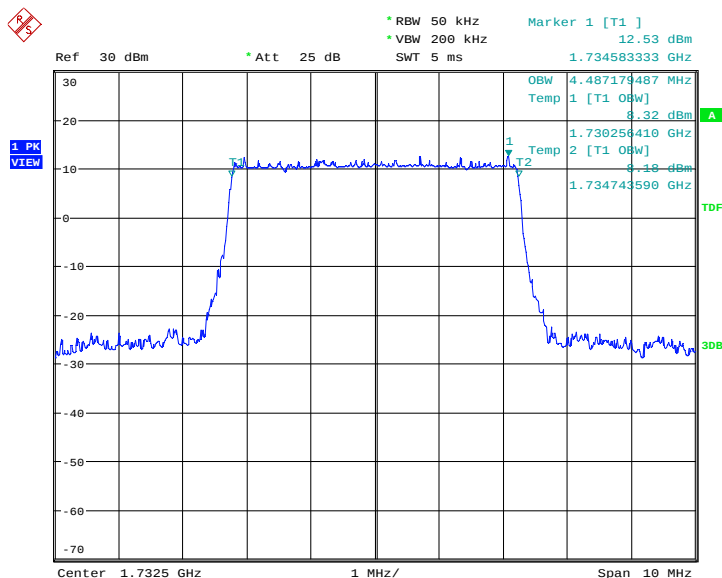

Date: 4.DEC.2013 16:54:42

LTE band 4, 5MHz Bandwidth,16QAM (99% BW)

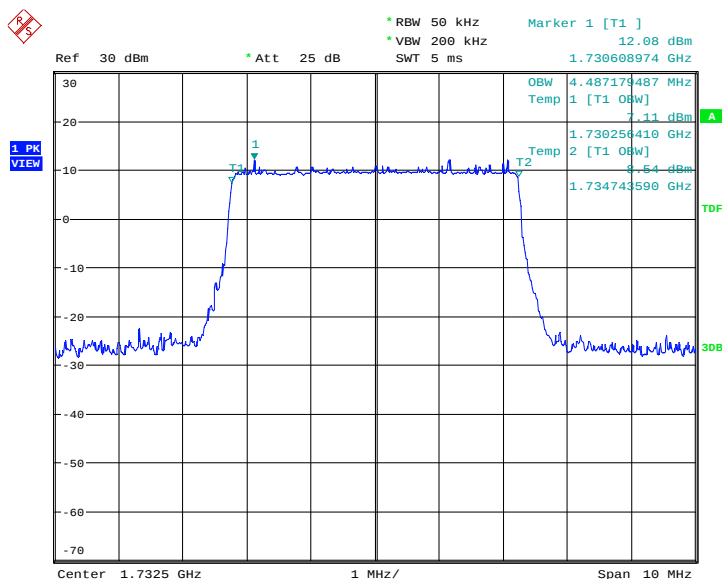


Date: 4.DEC.2013 16:54:55

LTE band 4, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	8966.35	8966.35

LTE band 4, 10MHz Bandwidth, QPSK (99% BW)

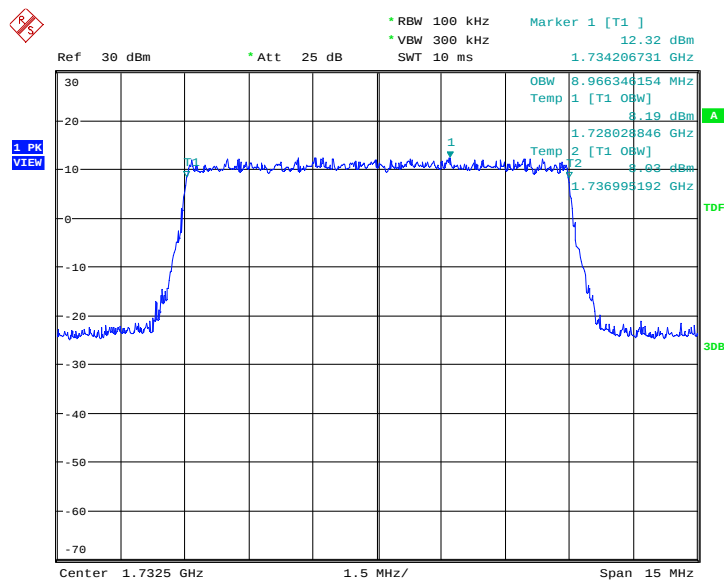

Date: 4.DEC.2013 17:15:29

LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)

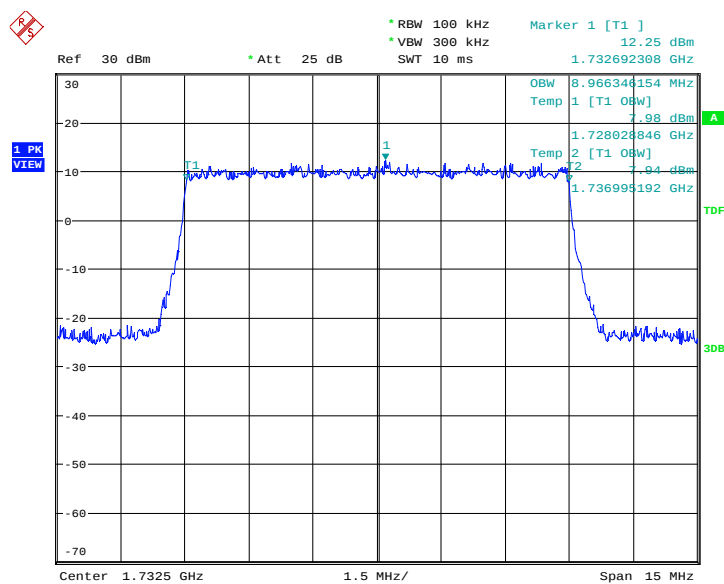


Date: 4.DEC.2013 17:15:43

LTE band 4, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	13461.54	13461.54

LTE band 4, 15MHz Bandwidth, QPSK (99% BW)

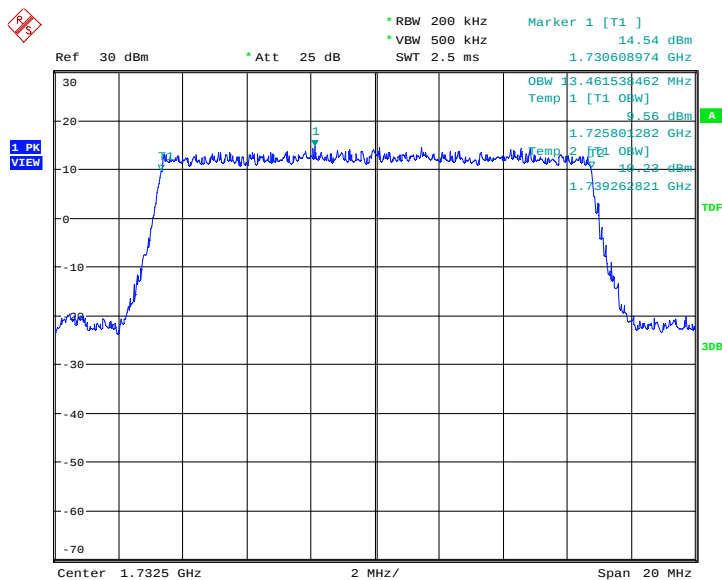

Date: 4.DEC.2013 19:29:01

LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)

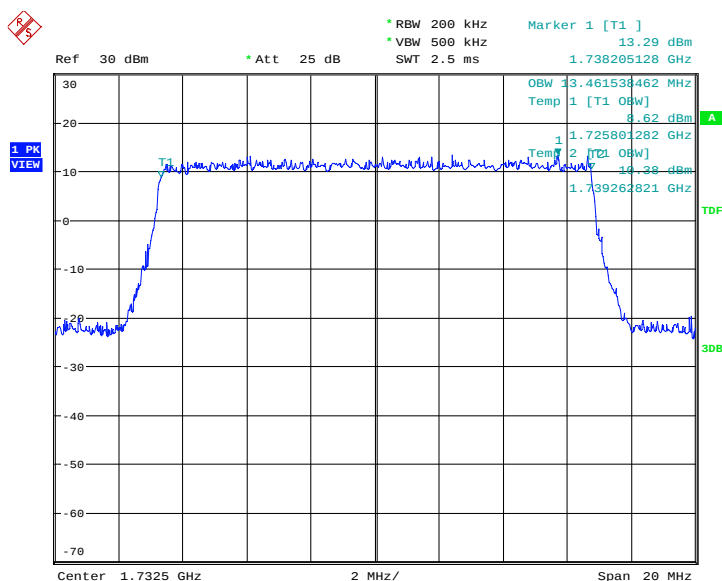


Date: 4.DEC.2013 19:29:15

LTE band 4, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	17884.62	17932.69

LTE band 4, 20MHz Bandwidth, QPSK (99% BW)

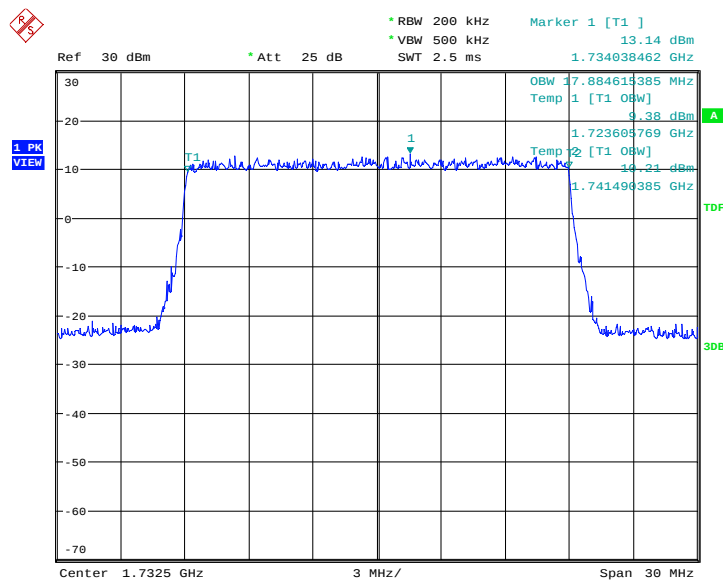

Date: 4.DEC.2013 19:51:53

LTE band 4, 20MHz Bandwidth, 16QAM (99% BW)

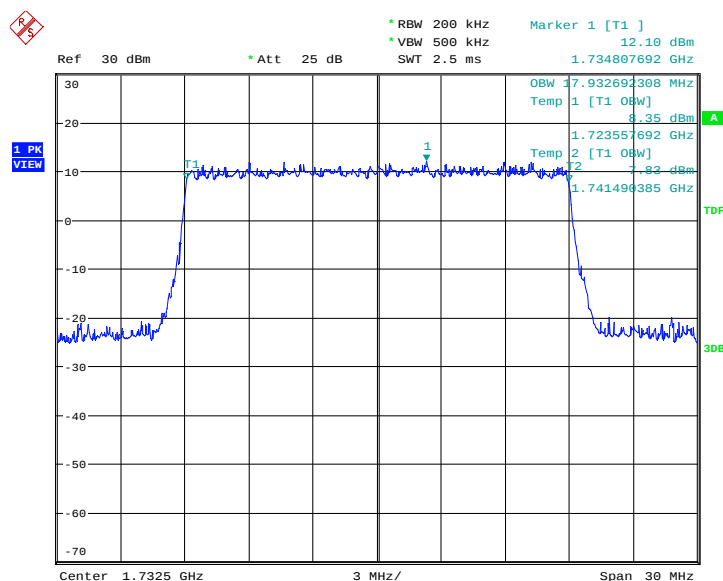

Date: 4.DEC.2013 19:52:07

A.6 EMISSION BANDWIDTH

Reference

FCC: CFR Part 24.238(a), 27.53(h)


A.6.1 Emission Bandwidth Results

Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 2, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	1288.46	1322.12

LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)

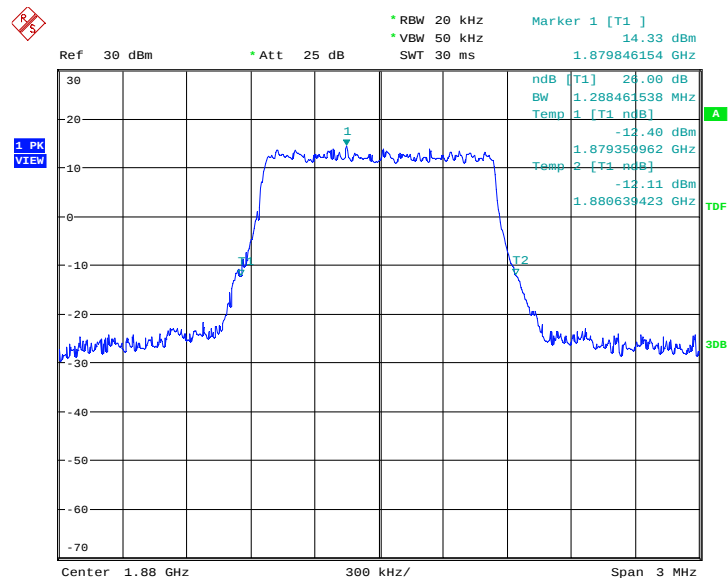

Date: 3.DEC.2013 15:58:30

LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

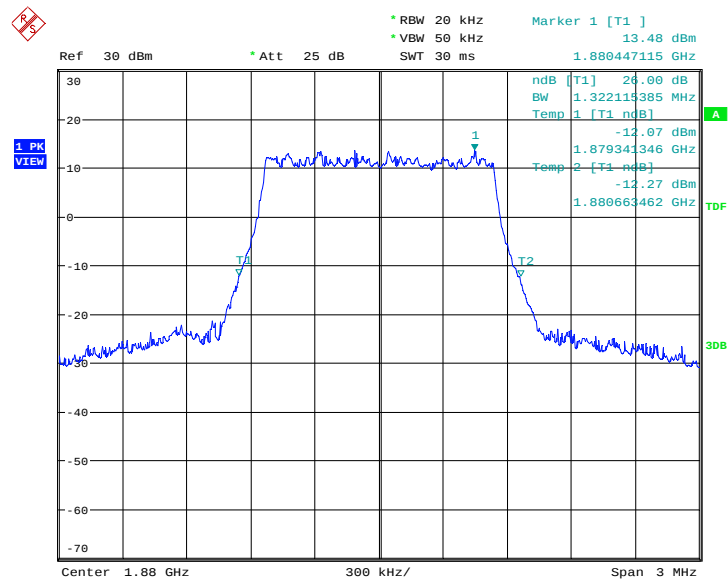


Date: 3.DEC.2013 15:58:45

LTE band 2, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	3012.82	3012.82

LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)

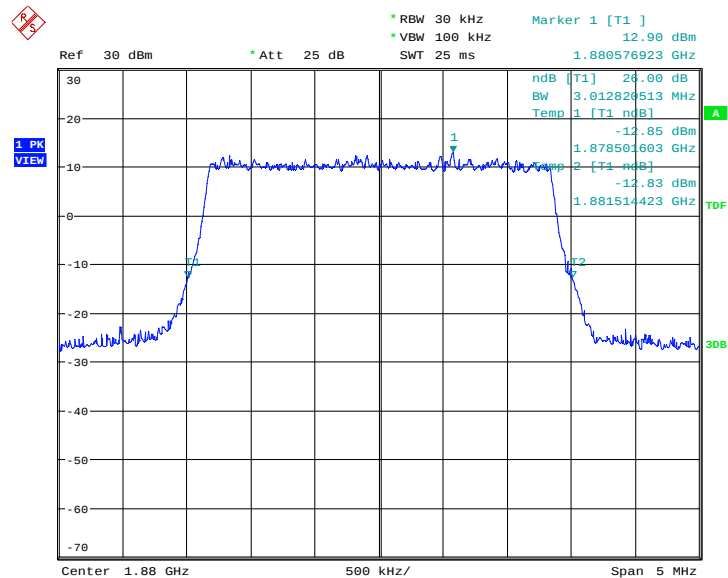

Date: 3.DEC.2013 16:24:09

LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)

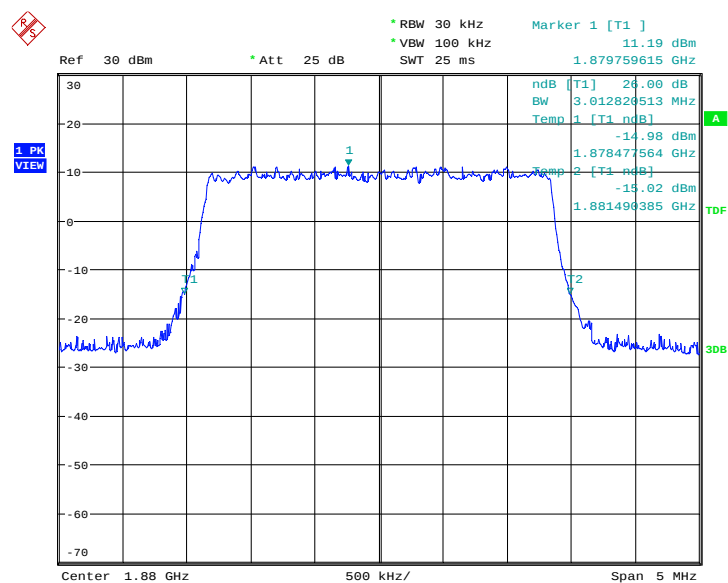


Date: 3.DEC.2013 16:24:24

LTE band 2, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	4935.90	4967.95

LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)

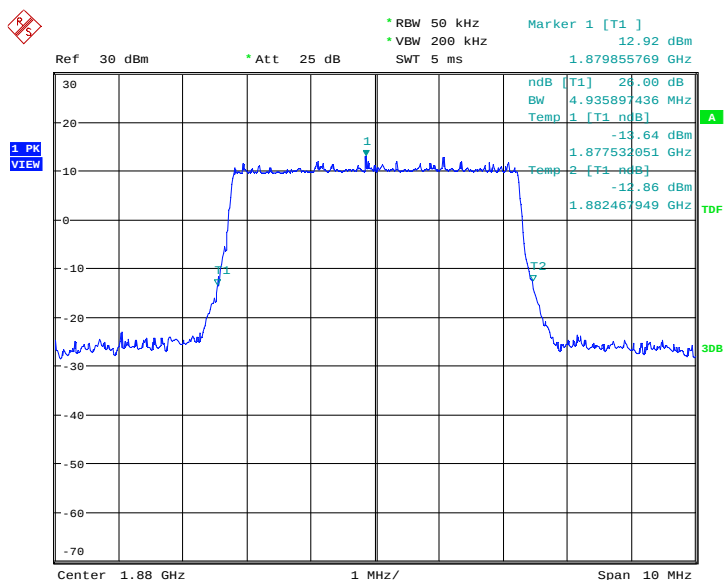

Date: 3.DEC.2013 16:49:51

LTE band 2, 5MHz Bandwidth, 16QAM (-26dBc BW)

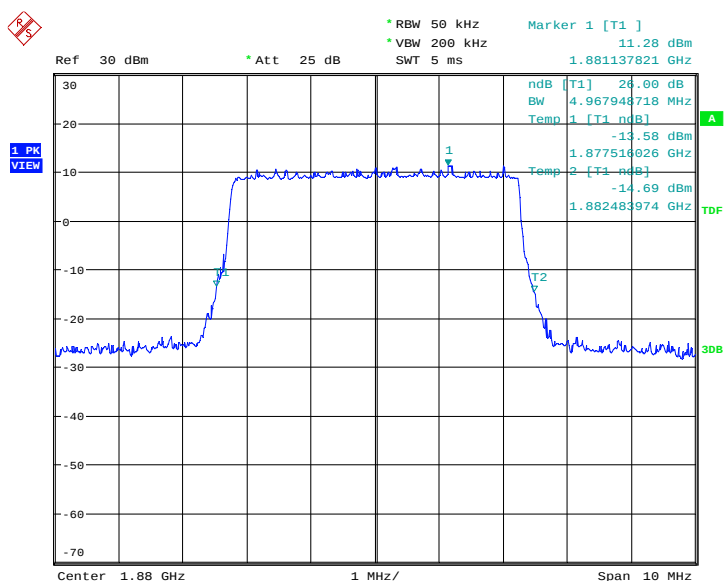


Date: 3.DEC.2013 16:50:06

LTE band 2, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	9855.77	9783.65

LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)

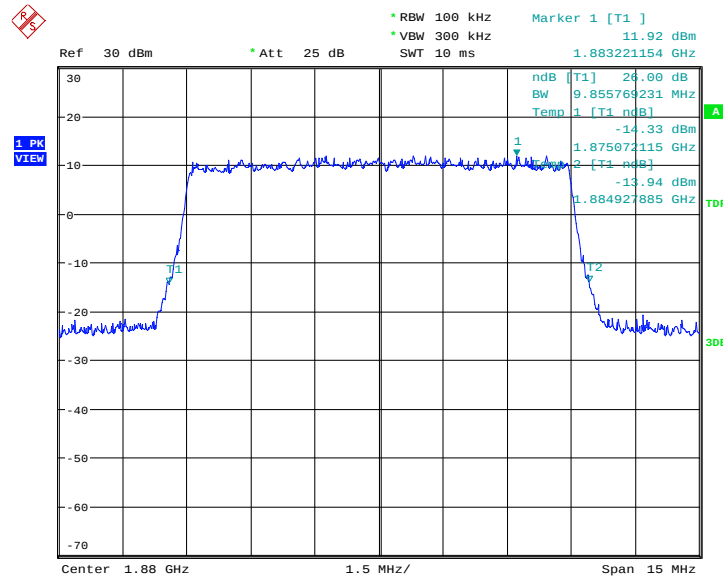

Date: 4.DEC.2013 18:47:39

LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)

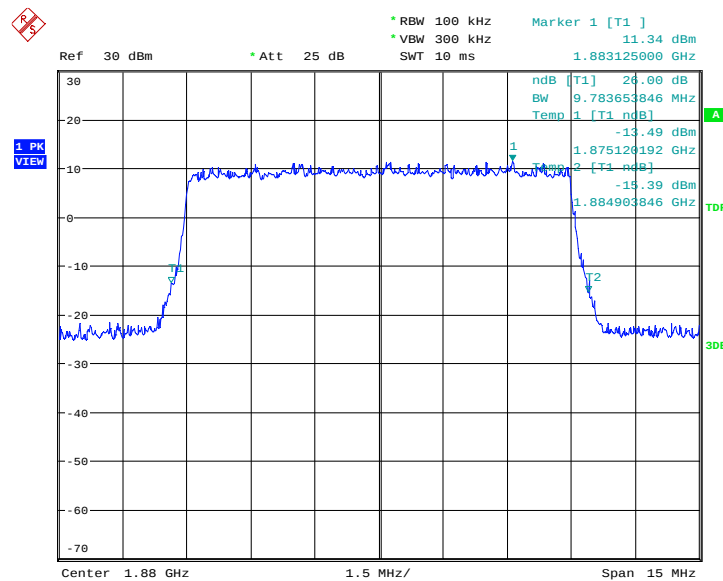


Date: 4.DEC.2013 18:47:55

LTE band 2, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	14647.44	14583.33

LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)

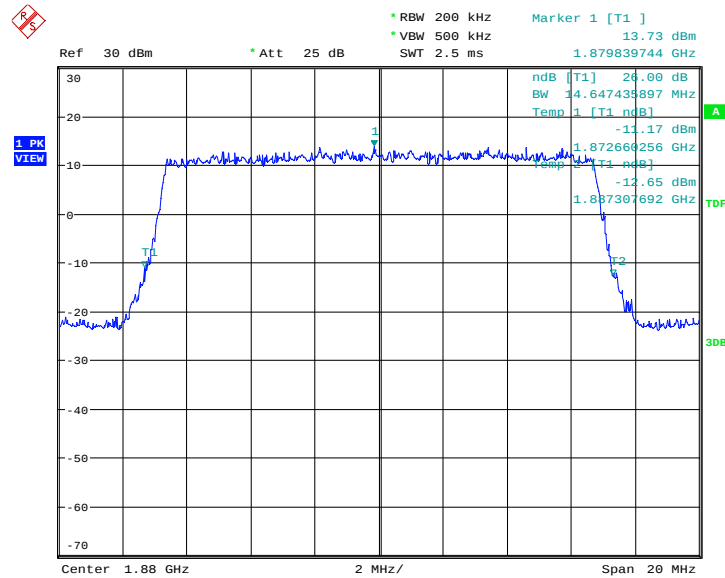

Date: 4.DEC.2013 18:30:25

LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)

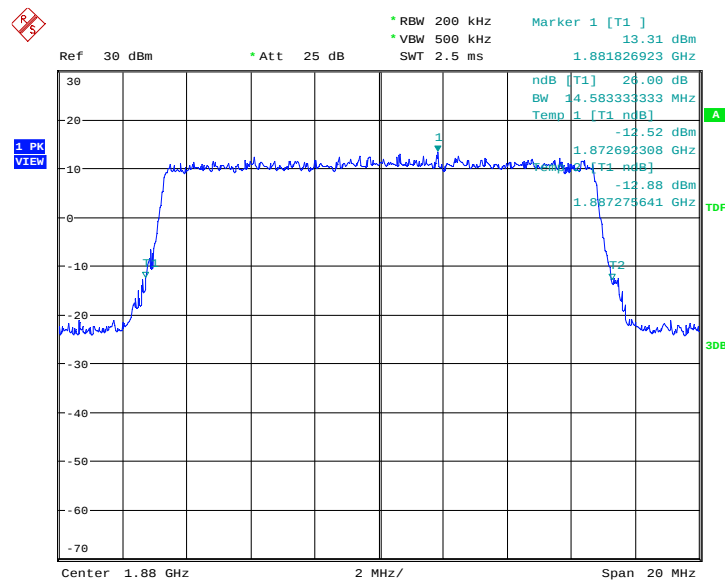


Date: 4.DEC.2013 18:30:40

LTE band 2, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	19278.85	19230.77

LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)

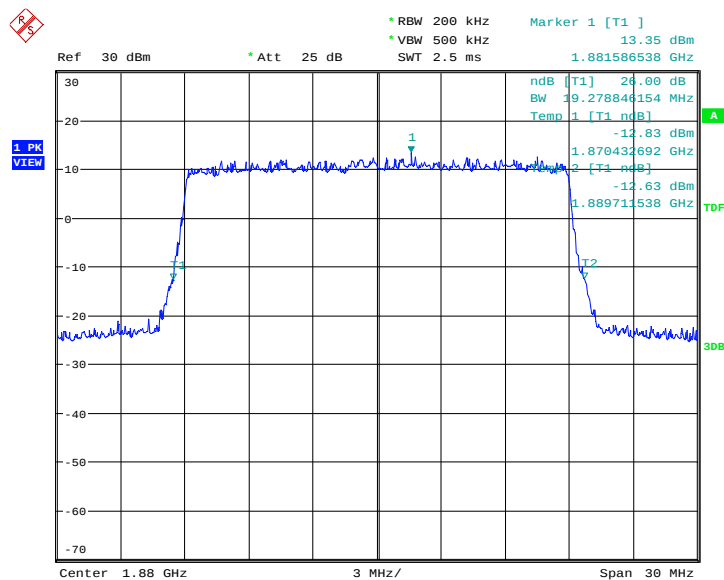

Date: 4.DEC.2013 19:08:29

LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)

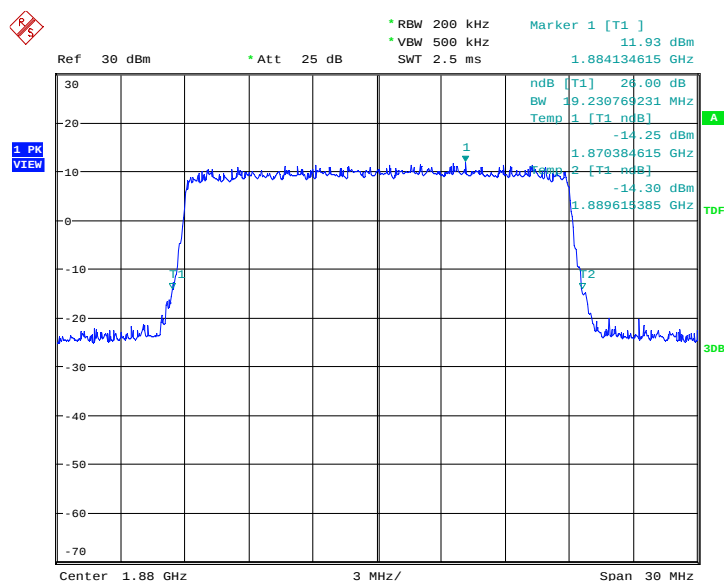


Date: 4.DEC.2013 19:08:45

LTE band 4, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	1307.69	1307.69

LTE band 4, 1.4MHz Bandwidth, QPSK (-26dBc BW)

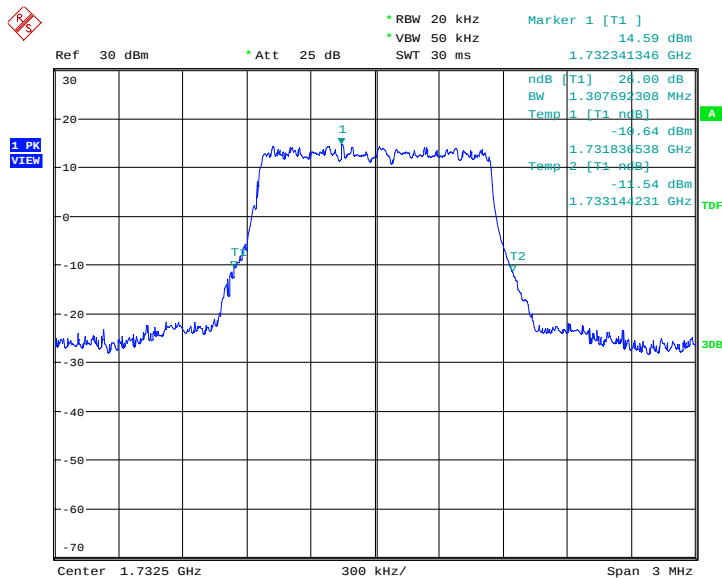

Date: 4.DEC.2013 16:05:17

LTE band 4, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

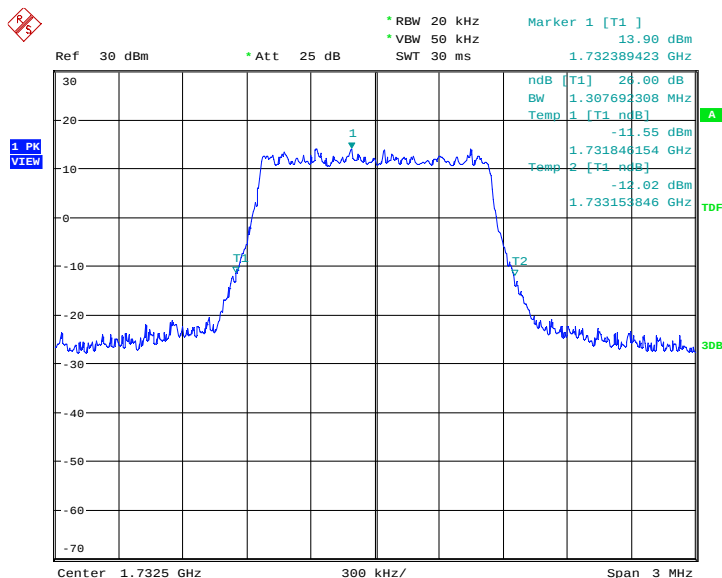


Date: 4.DEC.2013 16:05:32

LTE band 4, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	2980.77	3028.85

LTE band 4, 3MHz Bandwidth, QPSK (-26dBc BW)

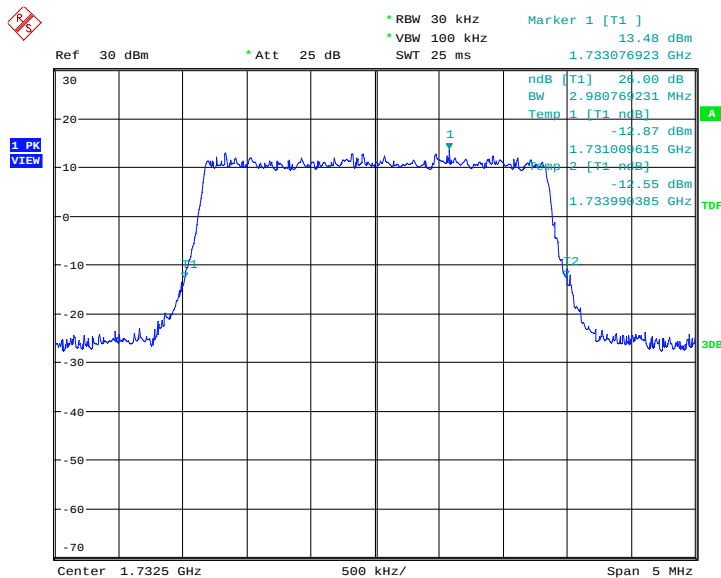

Date: 4.DEC.2013 16:38:15

LTE band 4, 3MHz Bandwidth, 16QAM (-26dBc BW)

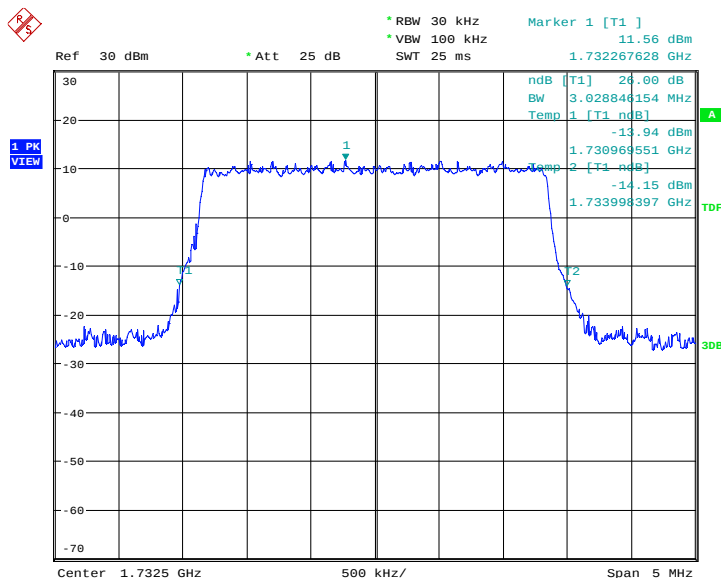


Date: 4.DEC.2013 16:38:31

LTE band 4, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	4887.82	4951.92

LTE band 4, 5MHz Bandwidth, QPSK (-26dBc BW)

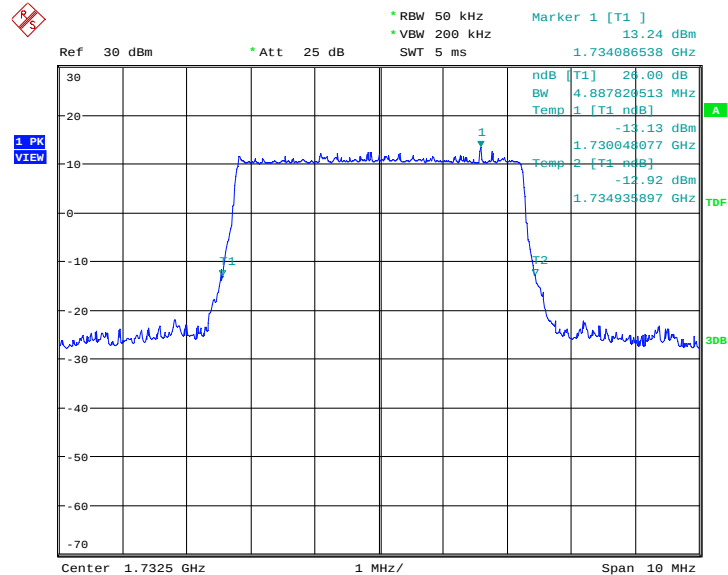

Date: 4.DEC.2013 16:59:03

LTE band 4, 5MHz Bandwidth, 16QAM (-26dBc BW)

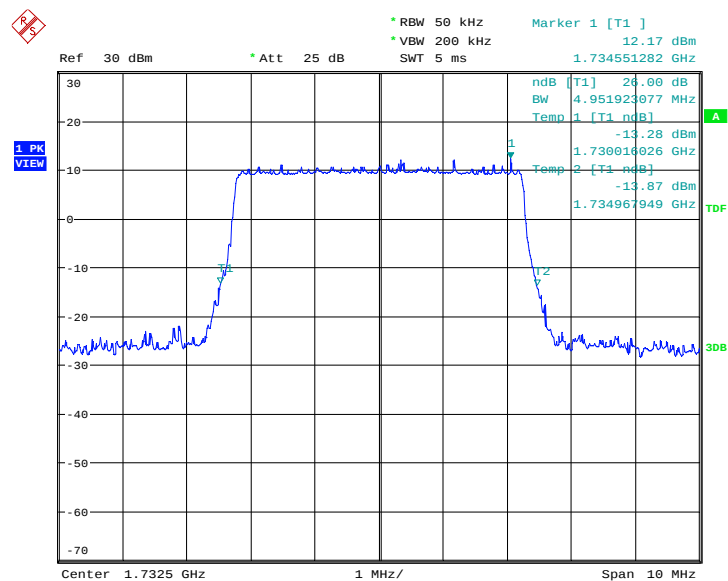


Date: 4.DEC.2013 16:59:19

LTE band 4, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	9855.77	9783.65

LTE band 4, 10MHz Bandwidth, QPSK (-26dBc BW)

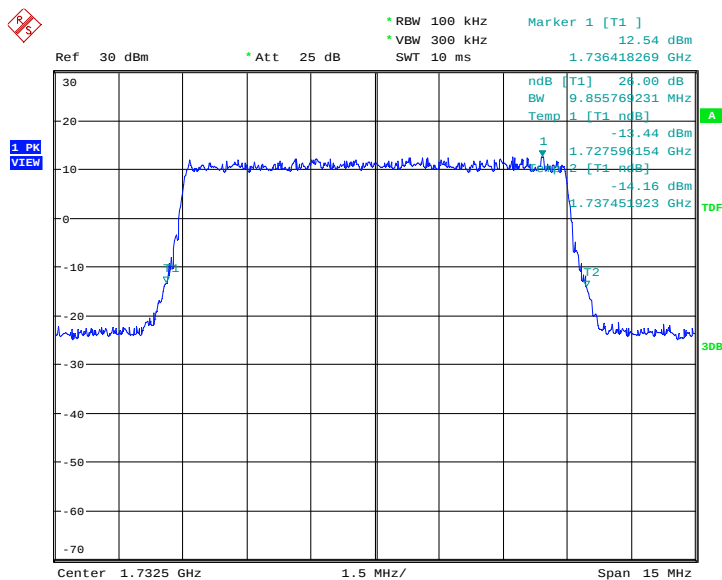

Date: 4.DEC.2013 17:19:51

LTE band 4, 10MHz Bandwidth, 16QAM (-26dBc BW)

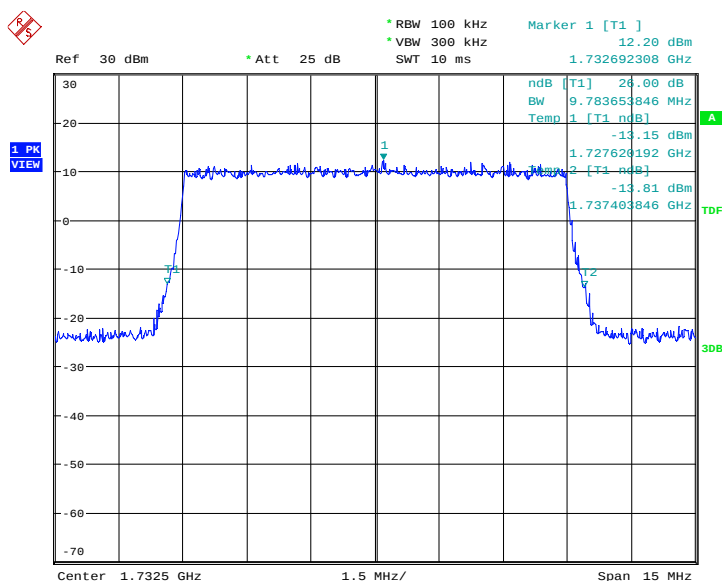


Date: 4.DEC.2013 17:20:07

LTE band 4, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	14743.59	14647.44

LTE band 4, 15MHz Bandwidth, QPSK (-26dBc BW)

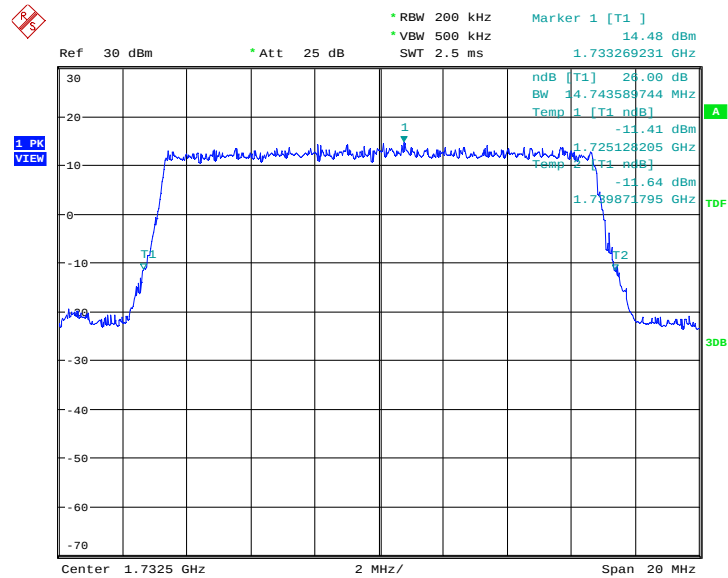

Date: 4.DEC.2013 19:33:23

LTE band 4, 15MHz Bandwidth, 16QAM (-26dBc BW)

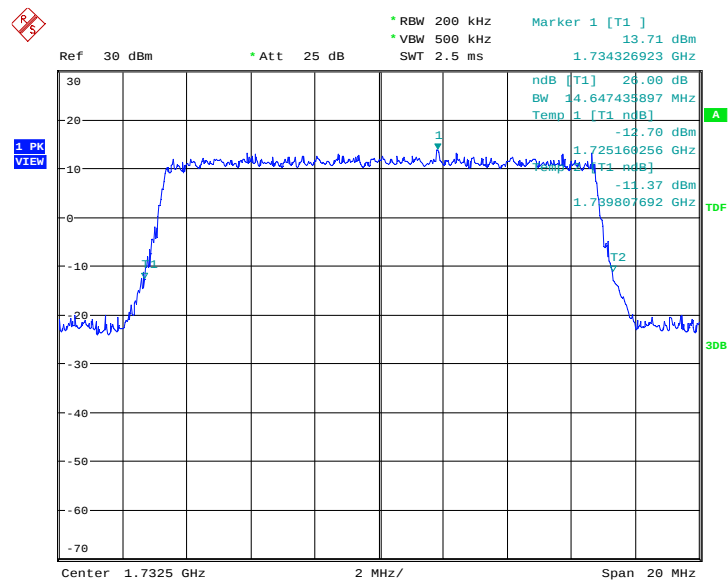


Date: 4.DEC.2013 19:33:39

LTE band 4, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1732.5	QPSK	16QAM
	19375.00	19326.92

LTE band 4, 20MHz Bandwidth, QPSK (-26dBc BW)

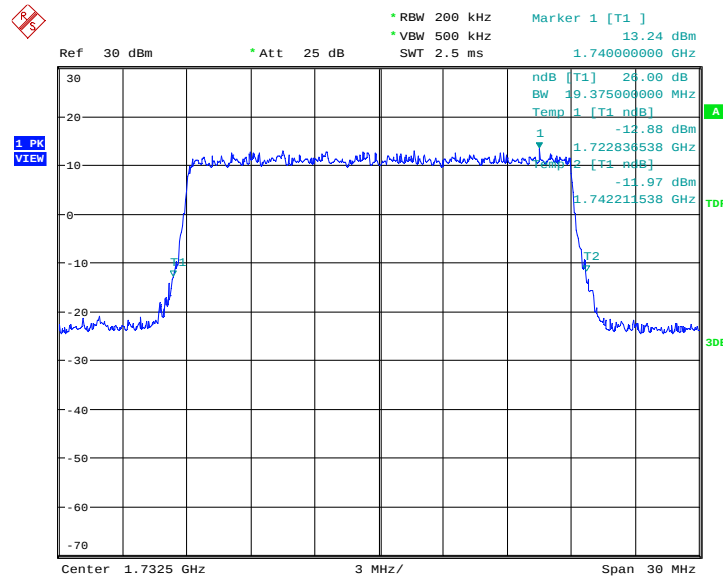

Date: 4.DEC.2013 19:59:45

LTE band 4, 20MHz Bandwidth, 16QAM (-26dBc BW)

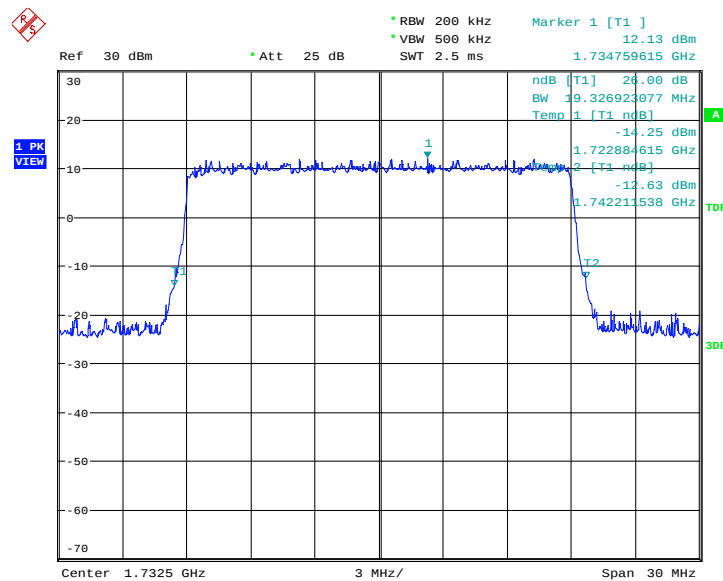

Date: 4.DEC.2013 20:00:01

A.7 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 24.238(a), 27.53(h).


A.7.1 Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

A.7.2 Measurement result


LTE band 2, 1.4MHz

LOW BAND EDGE BLOCK-QPSK

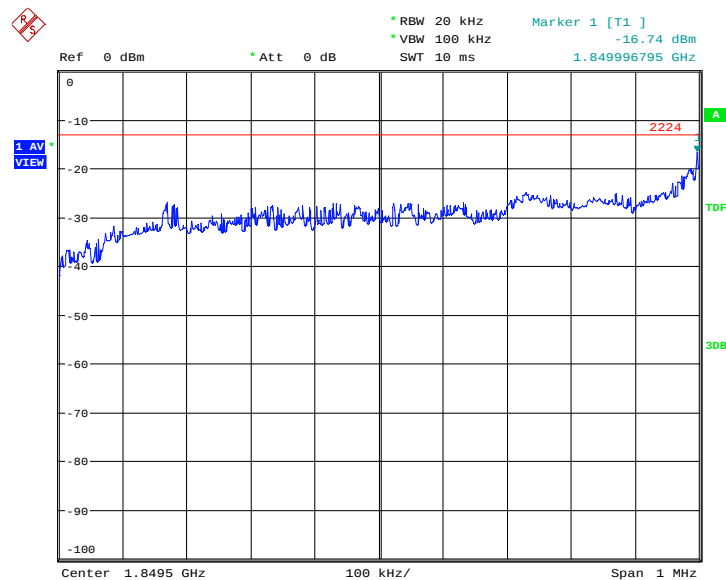


Date: 3.DEC.2013 15:57:27

HIGH BAND EDGE BLOCK-QPSK

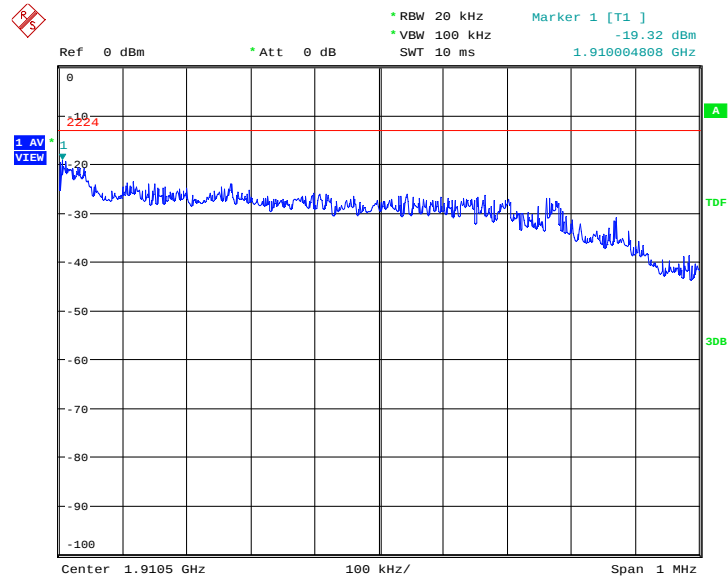


Date: 3.DEC.2013 16:00:41

LOW BAND EDGE BLOCK-16QAM

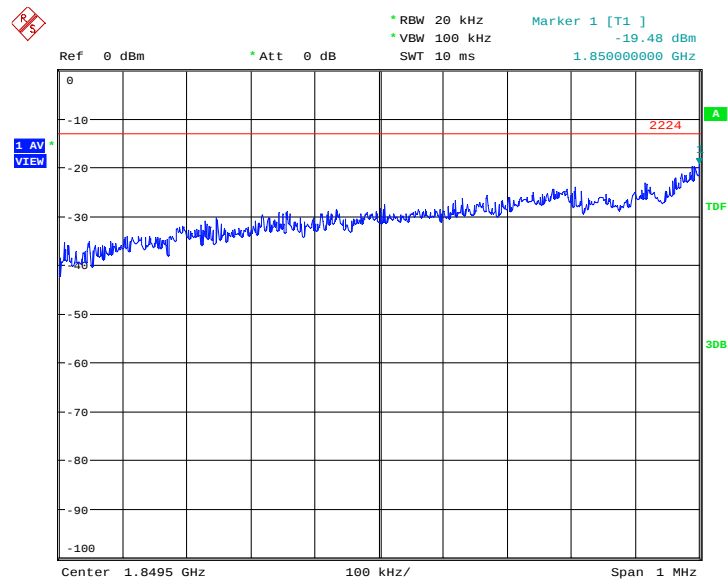


Date: 3.DEC.2013 15:57:36

HIGH BAND EDGE BLOCK-16QAM

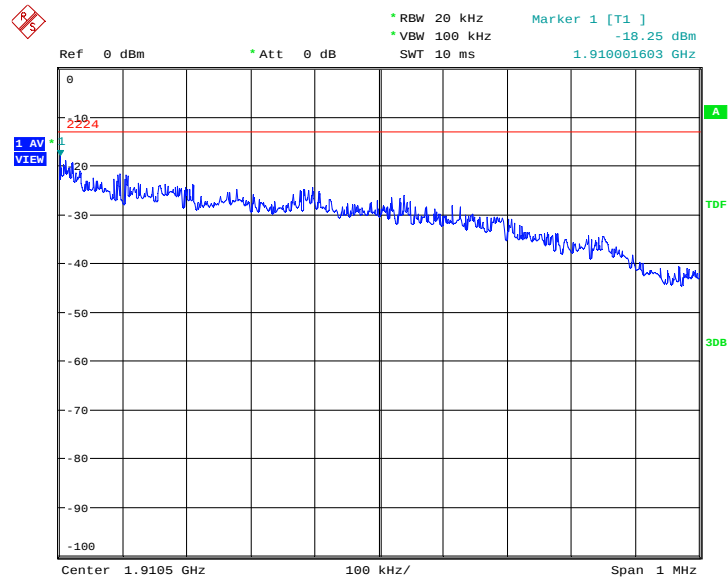


Date: 3.DEC.2013 16:00:50

LTE band 2, 3MHz LOW BAND EDGE BLOCK-QPSK

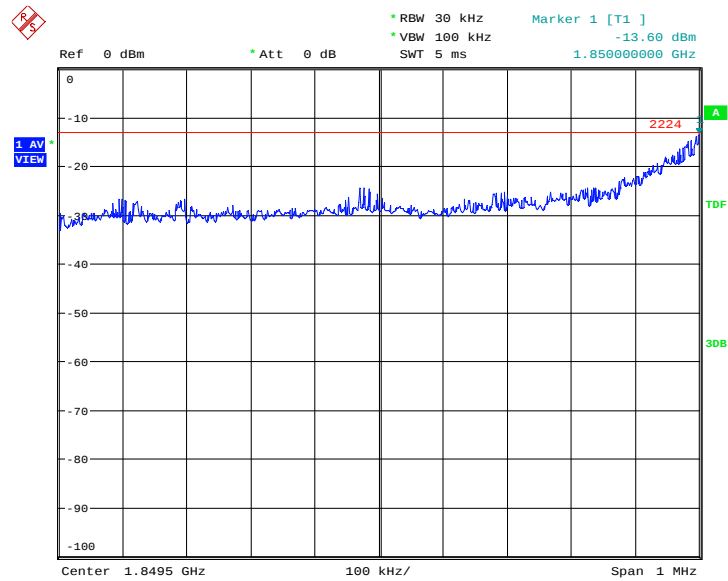


Date: 3.DEC.2013 16:23:07

HIGH BAND EDGE BLOCK-QPSK

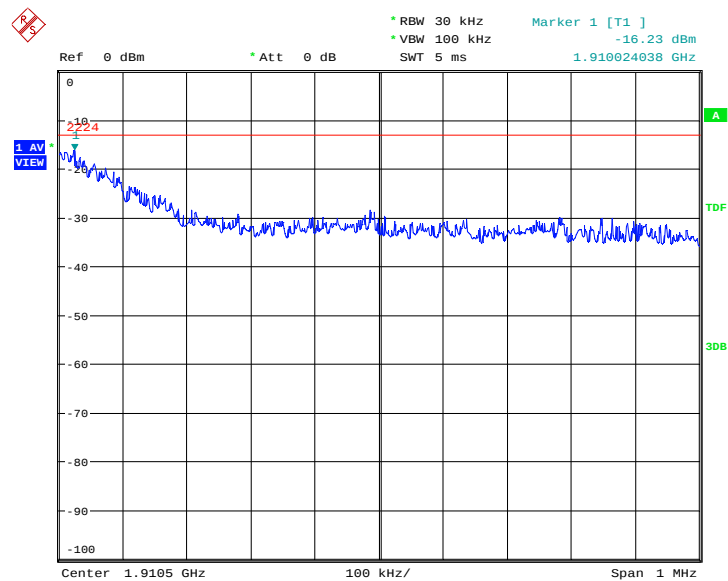


Date: 5.DEC.2013 08:59:15

LOW BAND EDGE BLOCK-16QAM

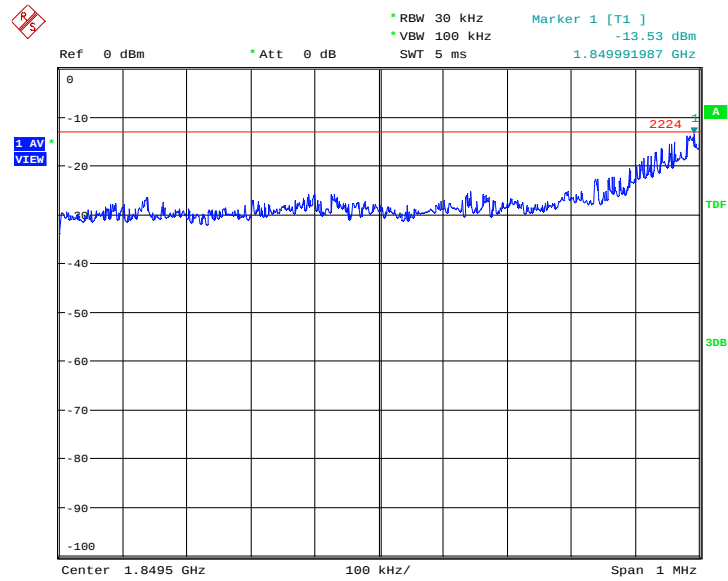


Date: 3.DEC.2013 16:23:16

HIGH BAND EDGE BLOCK-16QAM

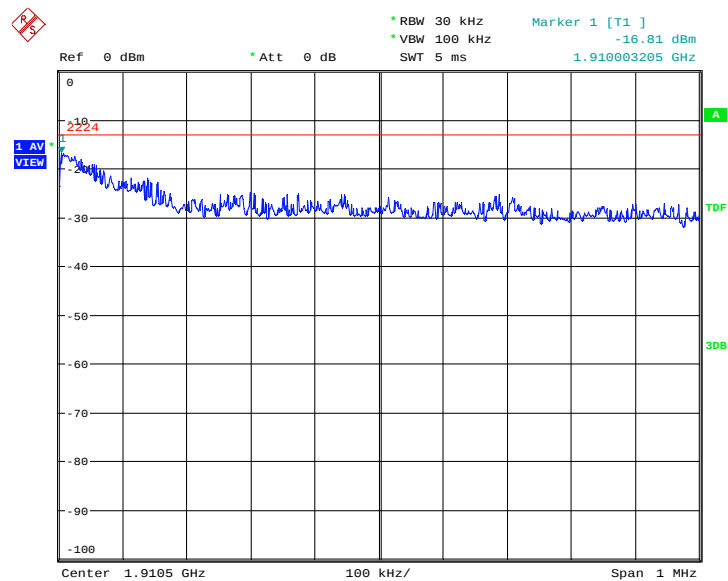


Date: 3.DEC.2013 16:26:29

LTE band 2, 5MHz LOW BAND EDGE BLOCK-QPSK

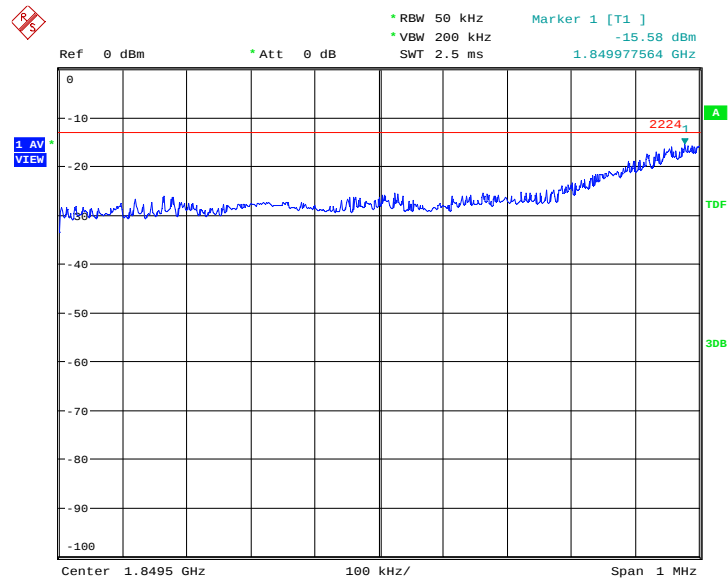


Date: 3.DEC.2013 16:48:48

HIGH BAND EDGE BLOCK-QPSK

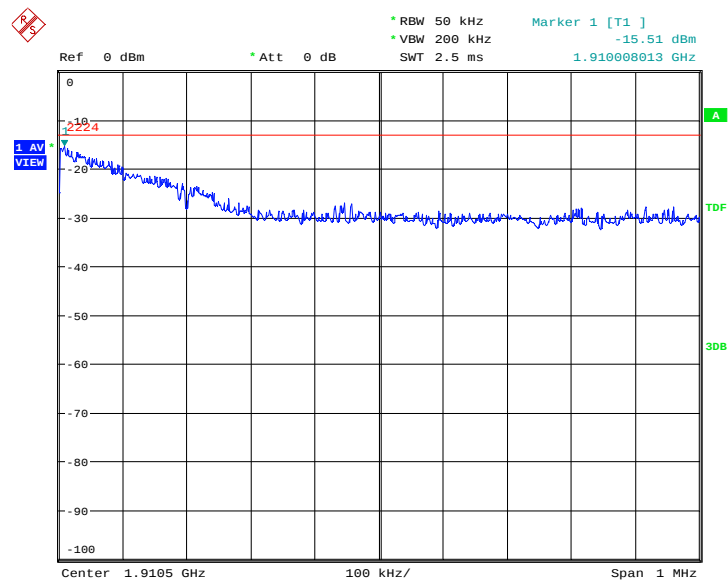


Date: 3.DEC.2013 16:52:02

LOW BAND EDGE BLOCK-16QAM

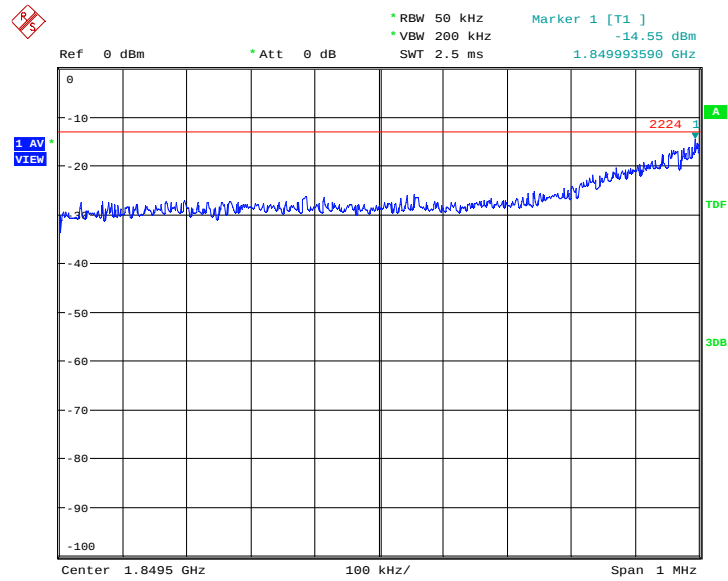


Date: 3.DEC.2013 16:48:57

HIGH BAND EDGE BLOCK-16QAM

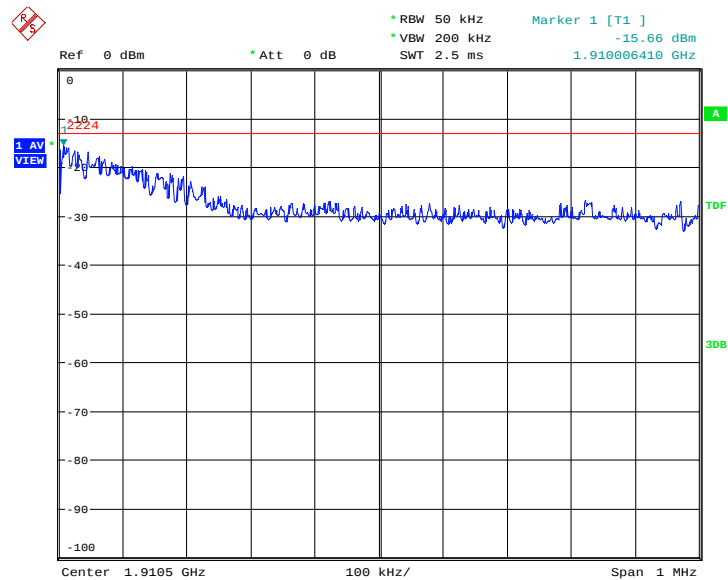


Date: 3.DEC.2013 16:52:11

LTE band 2, 10MHz LOW BAND EDGE BLOCK-QPSK

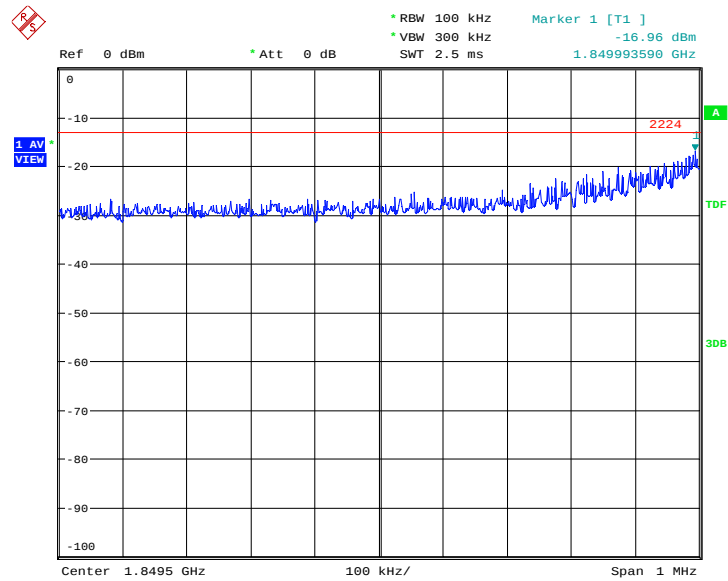


Date: 4.DEC.2013 18:46:34

HIGH BAND EDGE BLOCK-QPSK

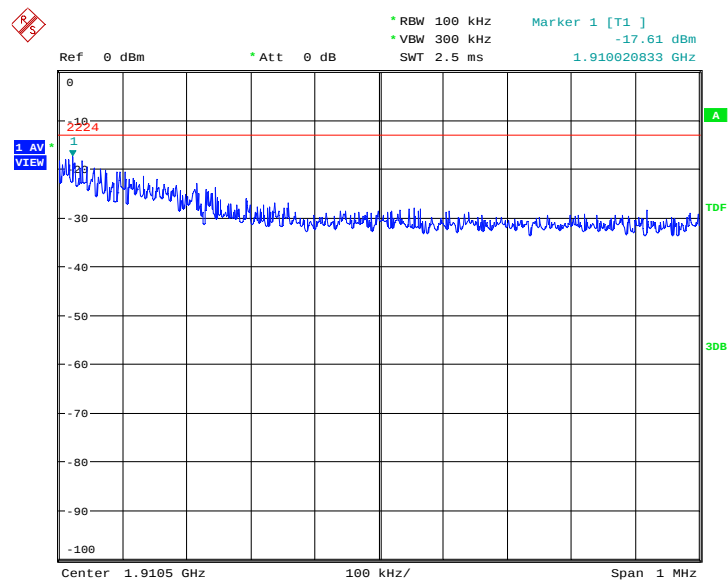


Date: 4.DEC.2013 18:49:54

LOW BAND EDGE BLOCK-16QAM

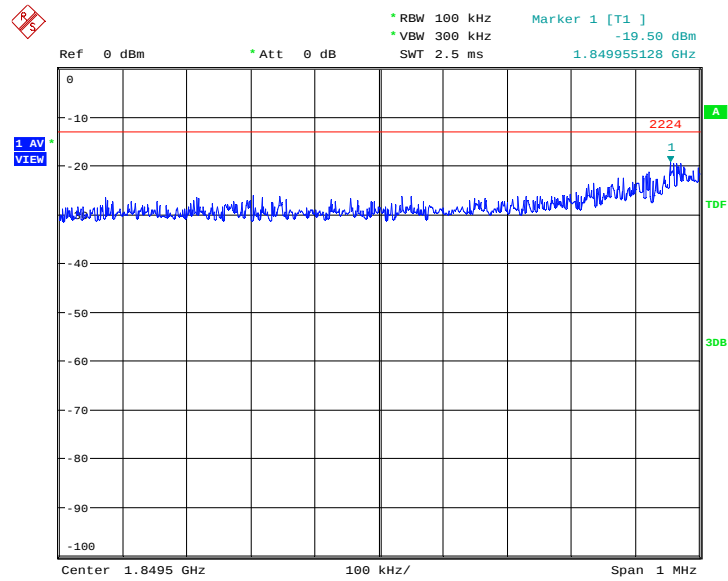


Date: 4.DEC.2013 18:46:44

HIGH BAND EDGE BLOCK-16QAM

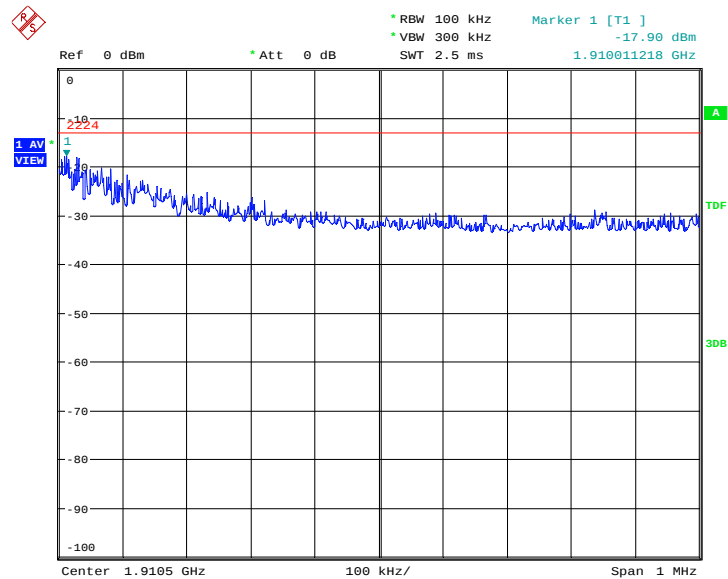


Date: 4.DEC.2013 18:50:04

LTE band 2, 15MHz LOW BAND EDGE BLOCK-QPSK

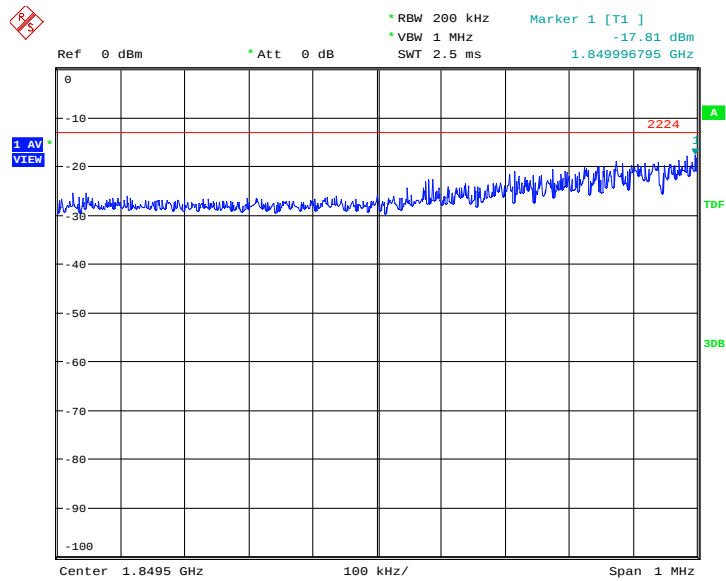


Date: 4.DEC.2013 18:29:19

HIGH BAND EDGE BLOCK-QPSK

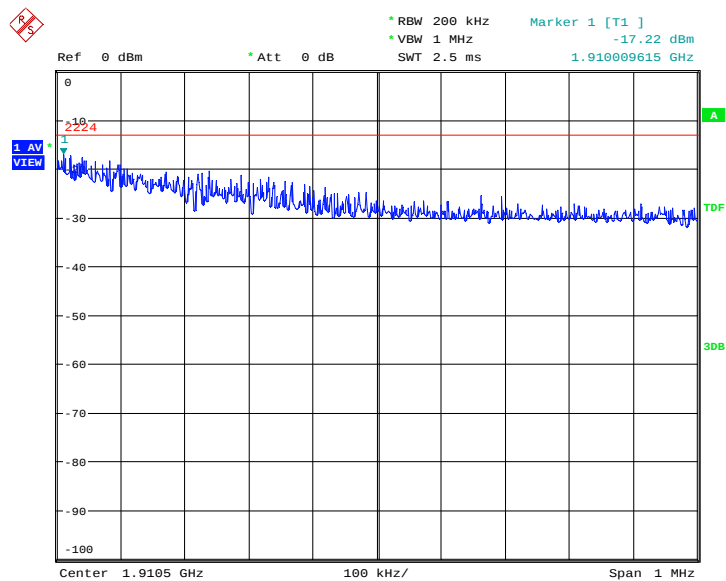


Date: 4.DEC.2013 18:33:40

LOW BAND EDGE BLOCK-16QAM

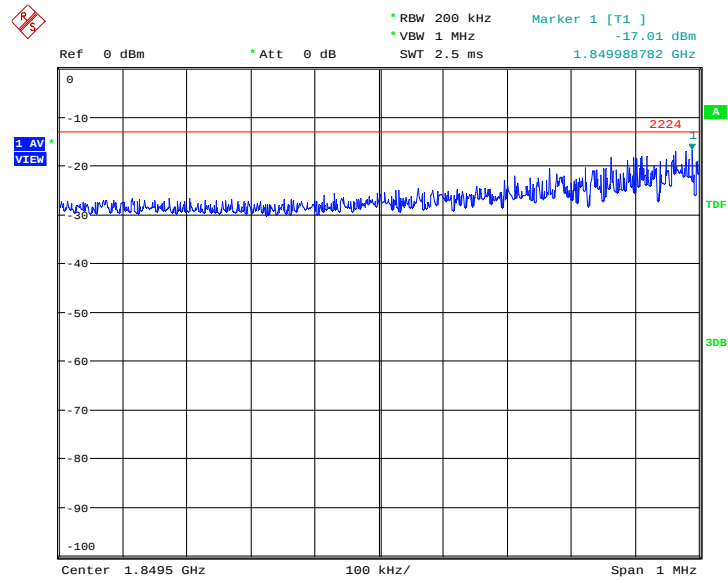


Date: 4.DEC.2013 18:29:29

HIGH BAND EDGE BLOCK-16QAM

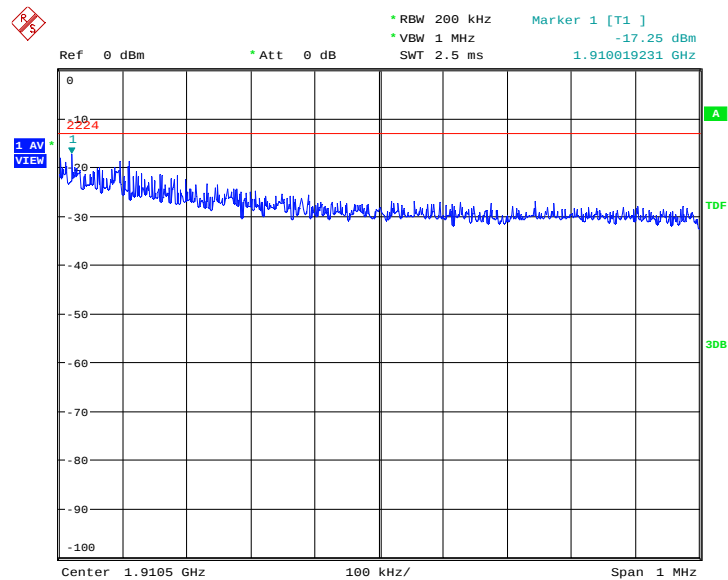


Date: 4.DEC.2013 18:33:51

LTE band 2, 20MHz LOW BAND EDGE BLOCK-QPSK

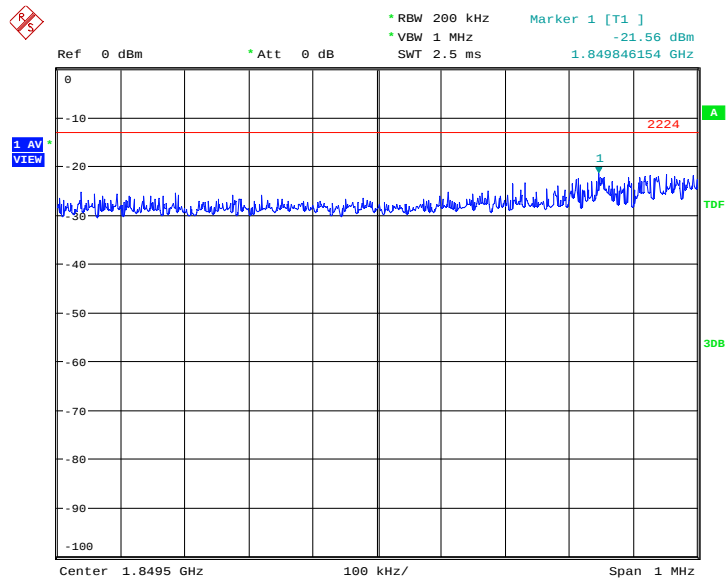


Date: 4.DEC.2013 19:07:23

HIGH BAND EDGE BLOCK-QPSK

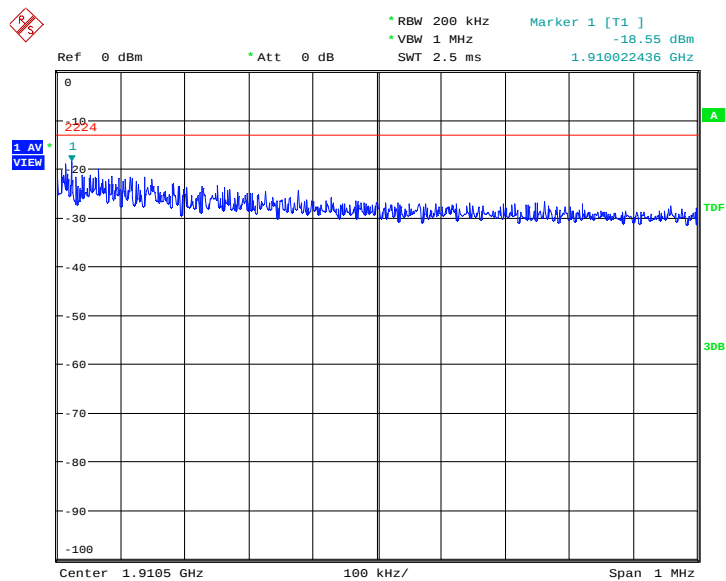


Date: 4.DEC.2013 19:10:44

LOW BAND EDGE BLOCK-16QAM

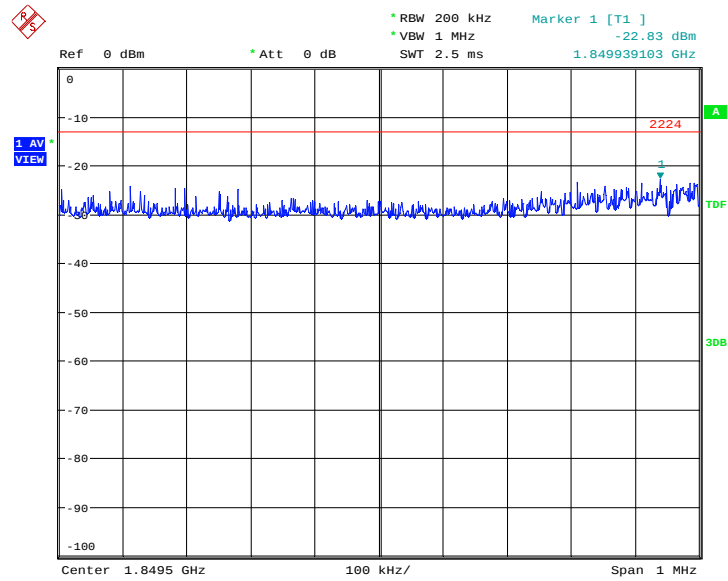


Date: 4.DEC.2013 19:07:34

HIGH BAND EDGE BLOCK-16QAM

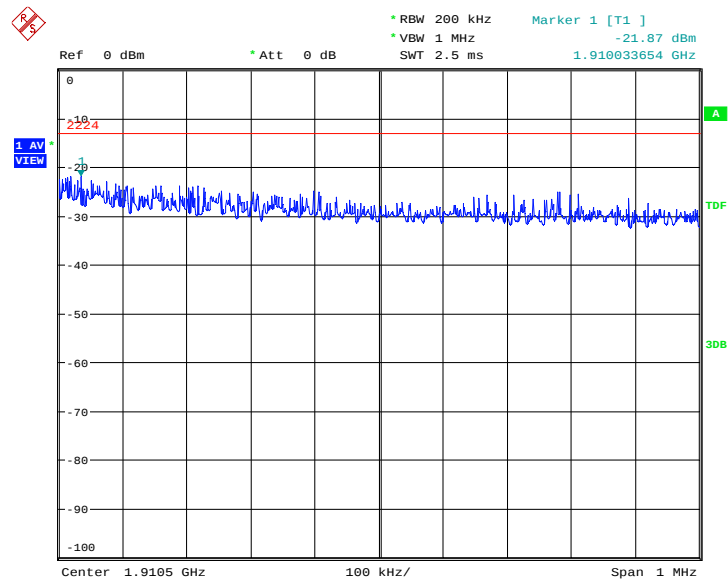


Date: 4.DEC.2013 19:10:55

LTE band 4, 1.4MHz LOW BAND EDGE BLOCK-QPSK

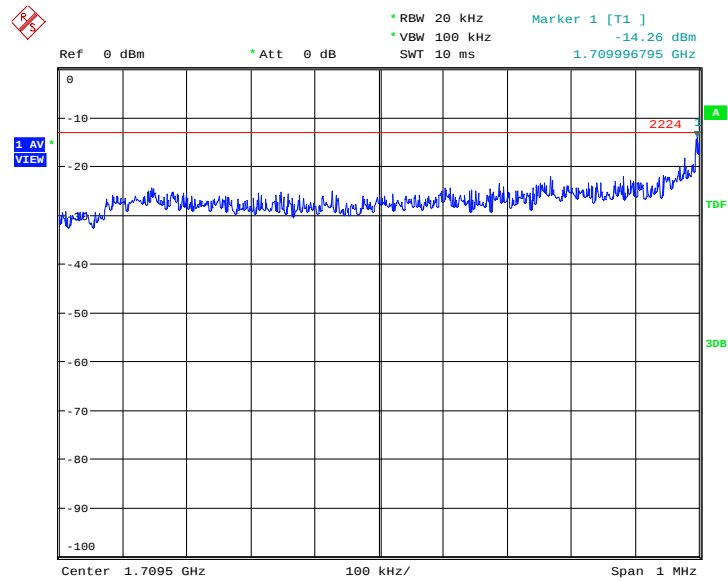


Date: 4.DEC.2013 16:04:11

HIGH BAND EDGE BLOCK-QPSK

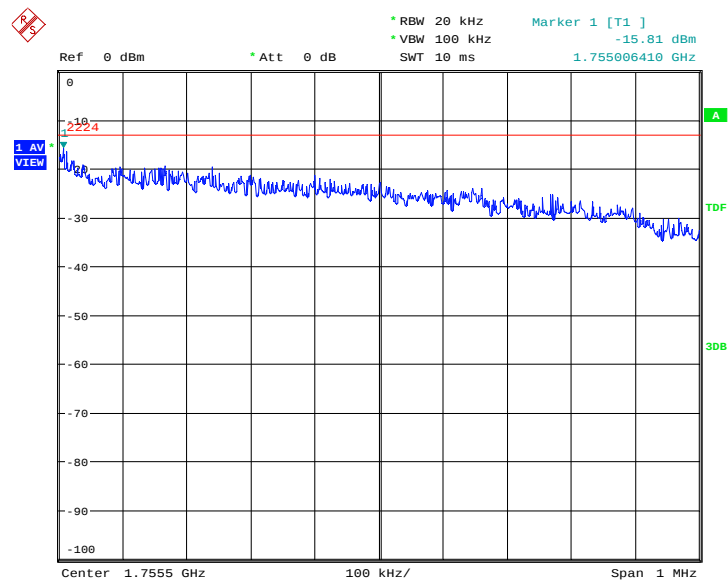


Date: 4.DEC.2013 16:07:32

LOW BAND EDGE BLOCK-16QAM

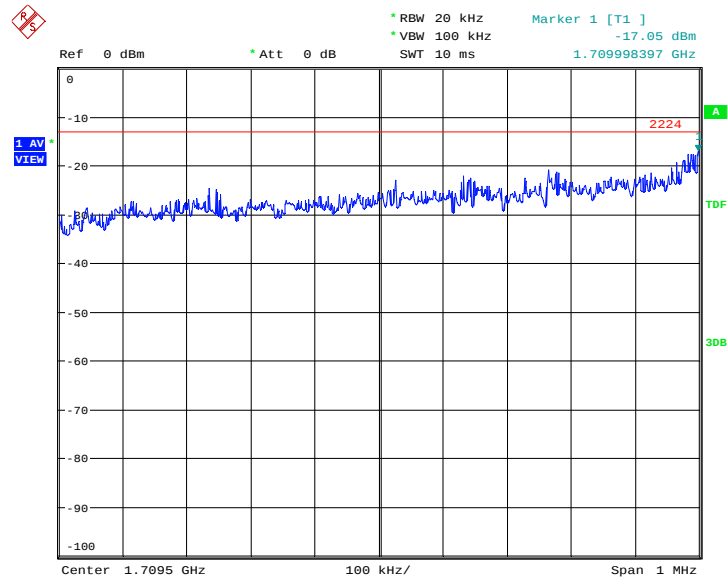


Date: 4.DEC.2013 16:04:21

HIGH BAND EDGE BLOCK-16QAM

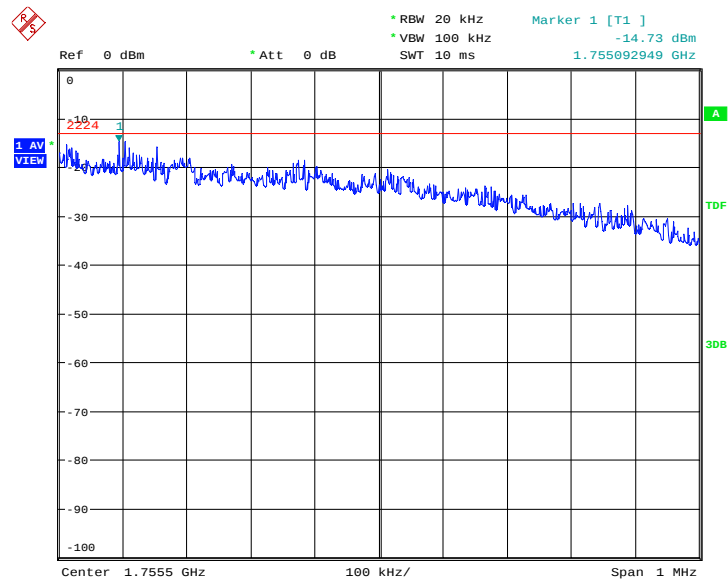


Date: 4.DEC.2013 16:07:42

LTE band 4, 3MHz LOW BAND EDGE BLOCK-QPSK

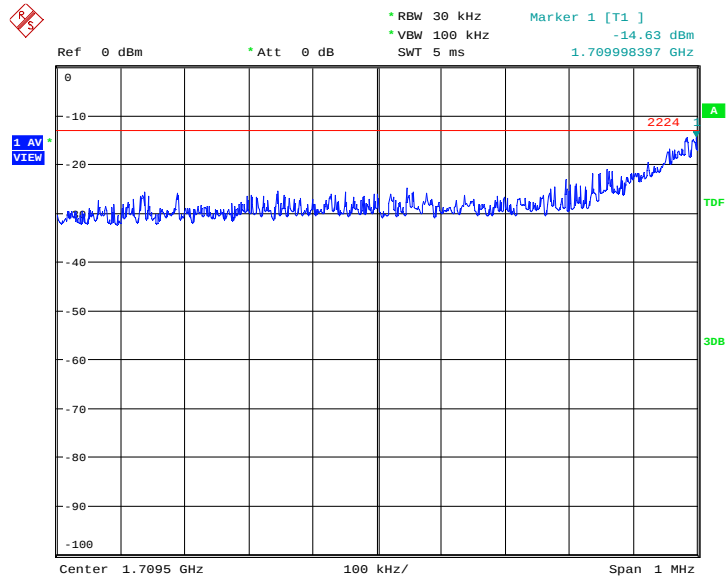


Date: 4.DEC.2013 16:37:10

HIGH BAND EDGE BLOCK-QPSK

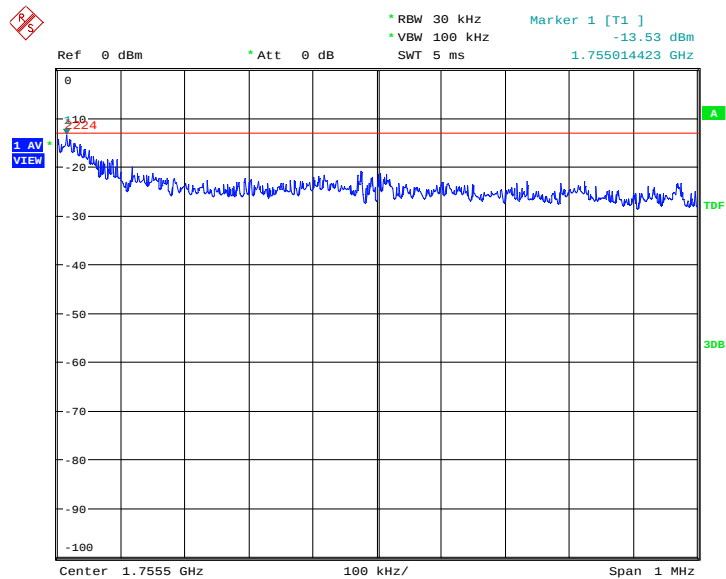


Date: 5.DEC.2013 09:01:00

LOW BAND EDGE BLOCK-16QAM

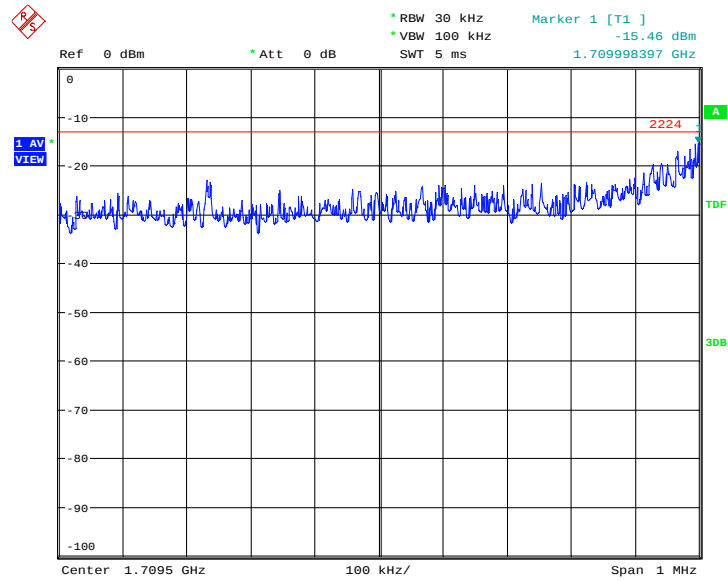


Date: 5.DEC.2013 09:11:31

HIGH BAND EDGE BLOCK-16QAM

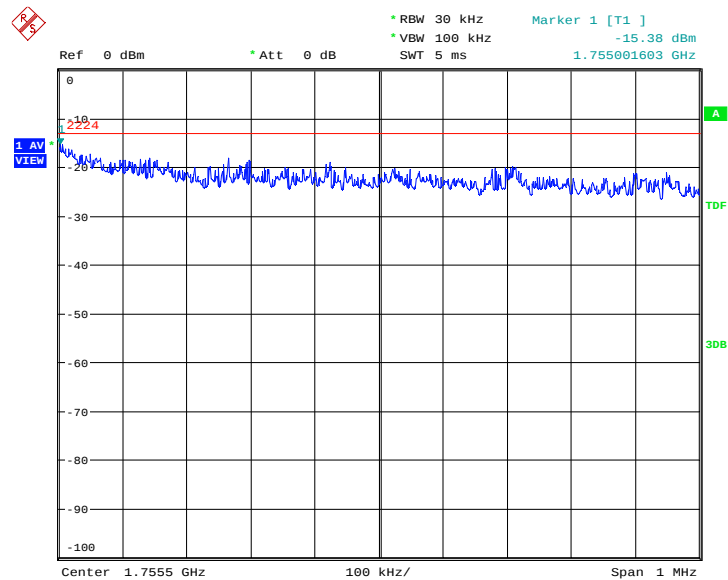


Date: 4.DEC.2013 16:40:41

LTE band 4, 5MHz LOW BAND EDGE BLOCK-QPSK

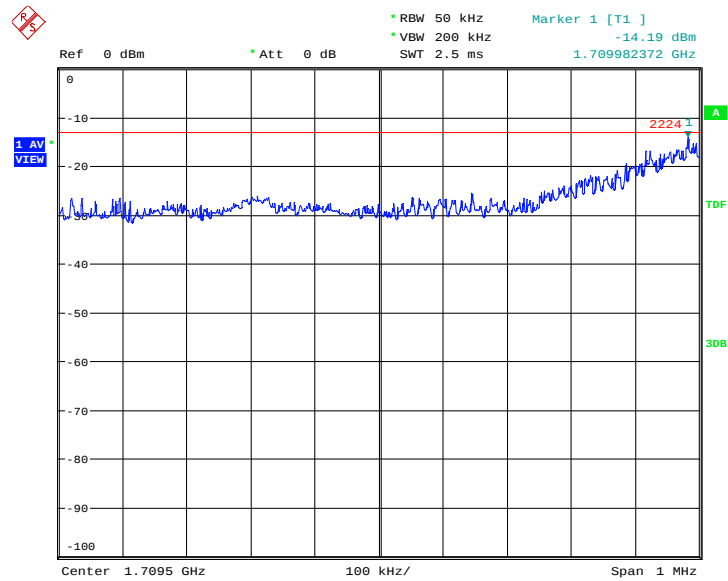


Date: 4.DEC.2013 16:57:58

HIGH BAND EDGE BLOCK-QPSK

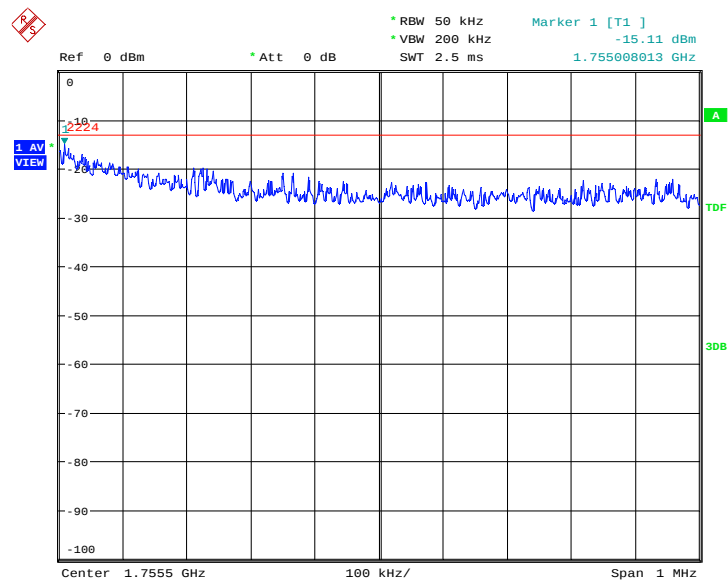


Date: 4.DEC.2013 17:01:18

LOW BAND EDGE BLOCK-16QAM

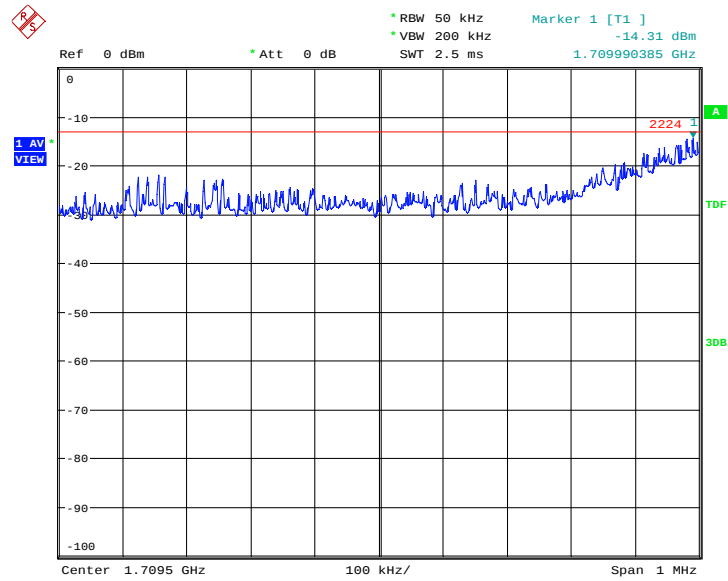


Date: 4.DEC.2013 16:58:08

HIGH BAND EDGE BLOCK-16QAM

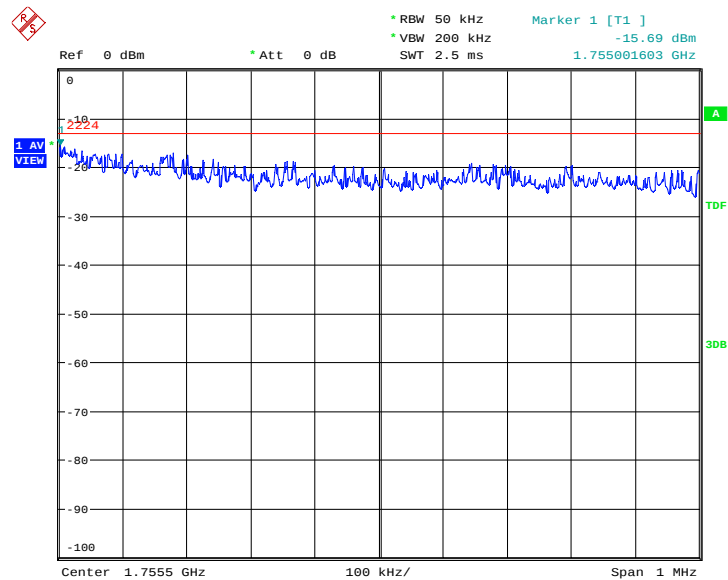


Date: 4.DEC.2013 17:01:29

LTE band 4, 10MHz LOW BAND EDGE BLOCK-QPSK

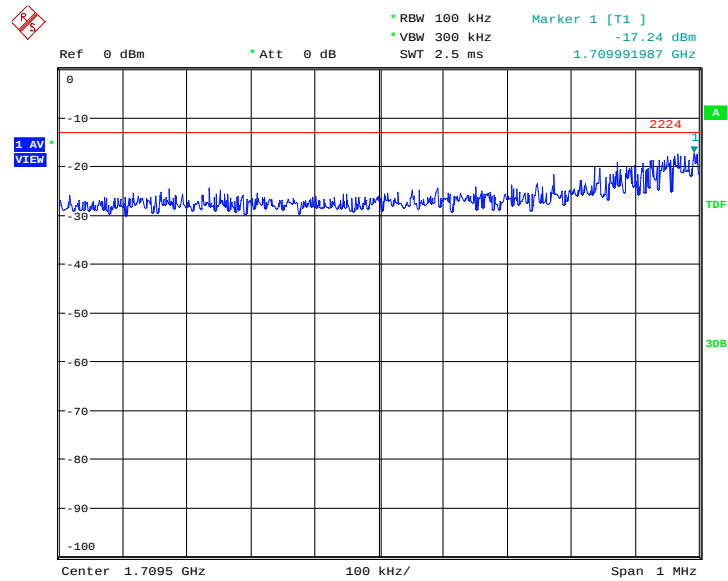


Date: 4.DEC.2013 17:18:45

HIGH BAND EDGE BLOCK-QPSK

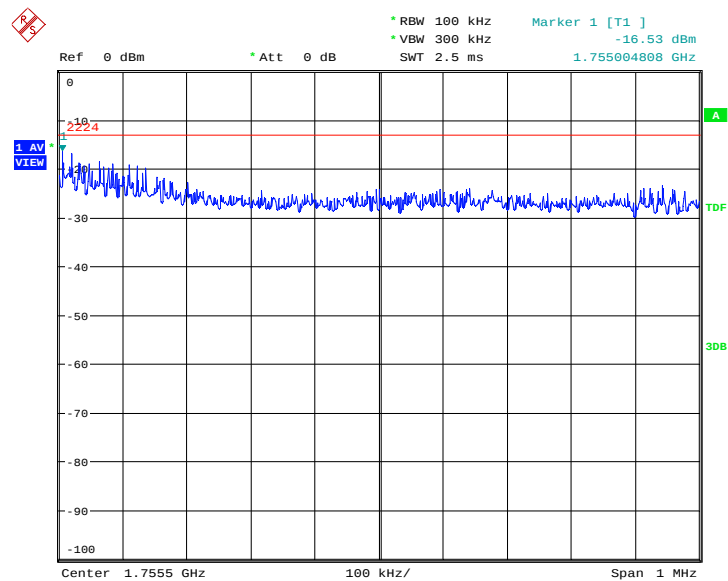


Date: 4.DEC.2013 17:22:06

LOW BAND EDGE BLOCK-16QAM

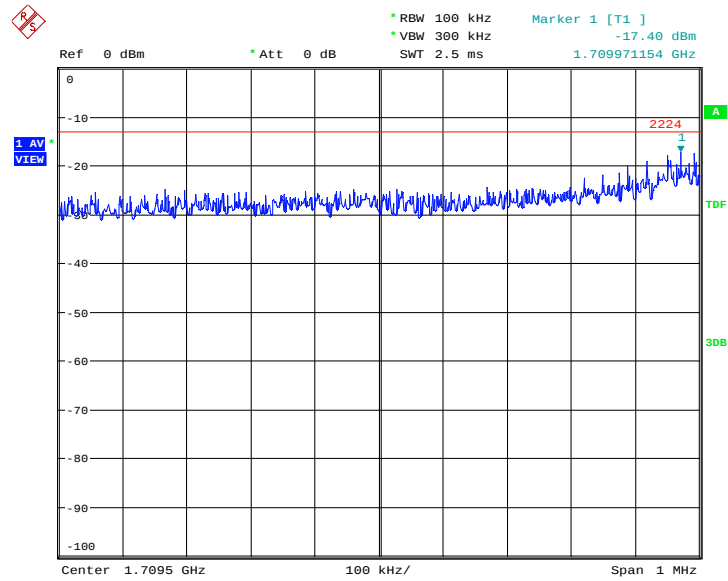


Date: 4.DEC.2013 17:18:56

HIGH BAND EDGE BLOCK-16QAM

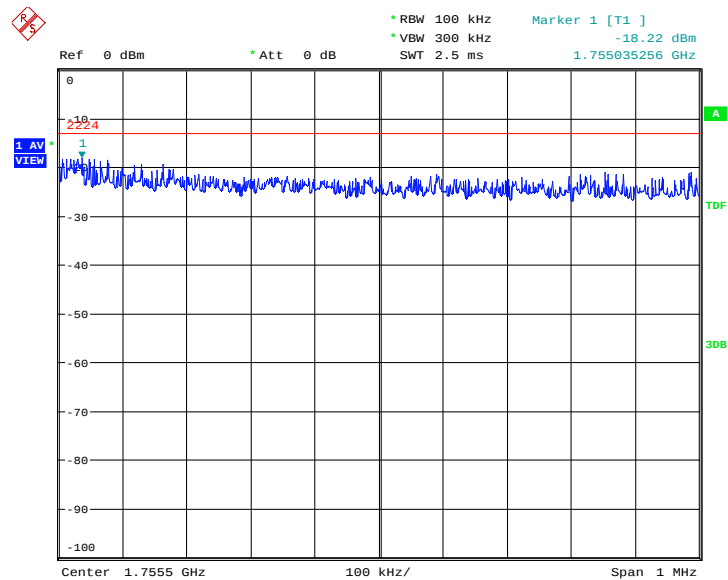


Date: 4.DEC.2013 17:22:16

LTE band 4, 15MHz LOW BAND EDGE BLOCK-QPSK

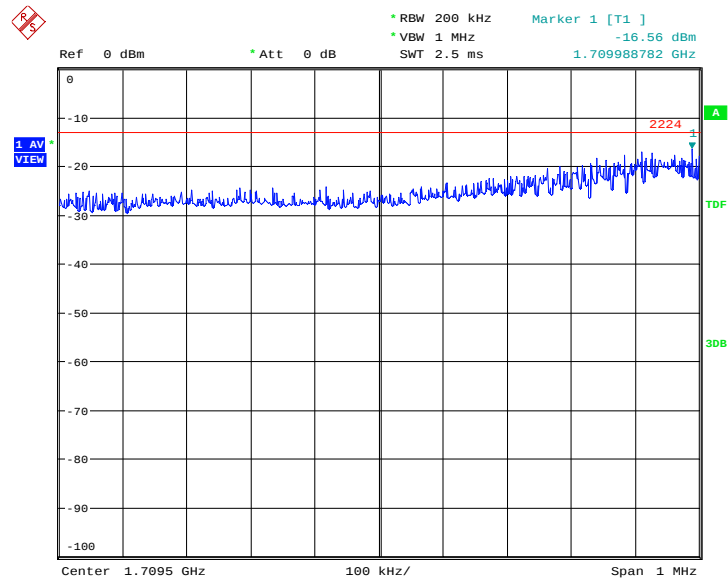


Date: 4.DEC.2013 19:32:18

HIGH BAND EDGE BLOCK-QPSK

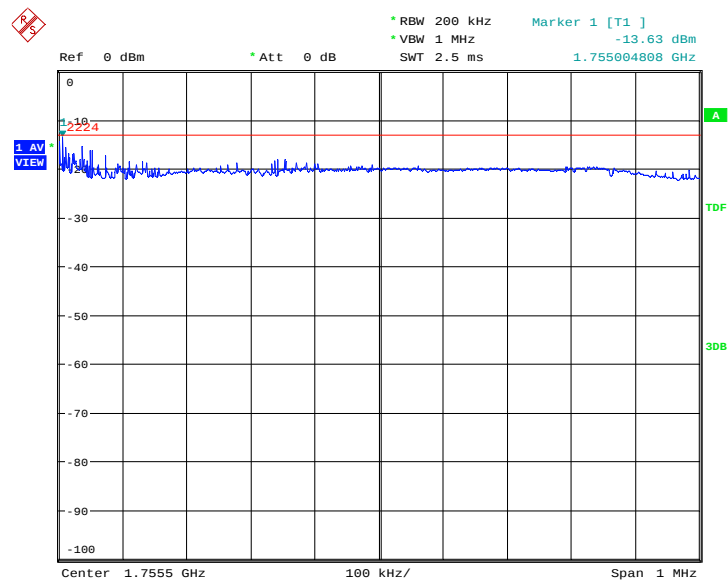


Date: 4.DEC.2013 19:35:39

LOW BAND EDGE BLOCK-16QAM

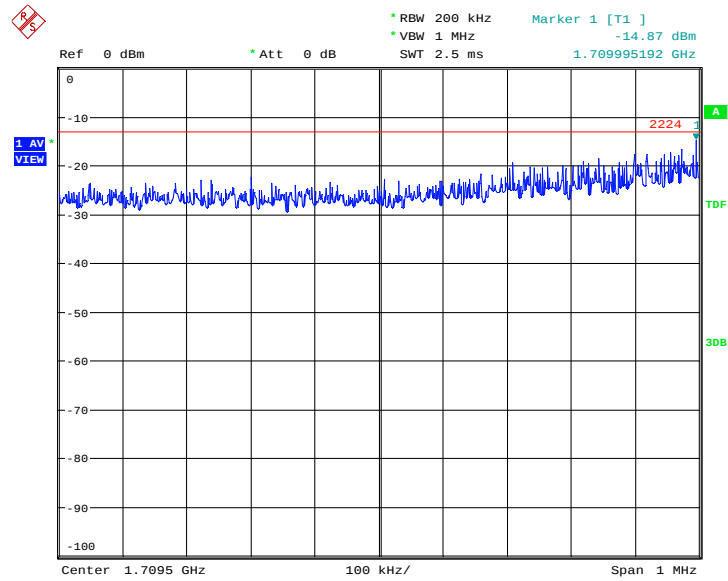


Date: 4.DEC.2013 19:32:28

HIGH BAND EDGE BLOCK-16QAM

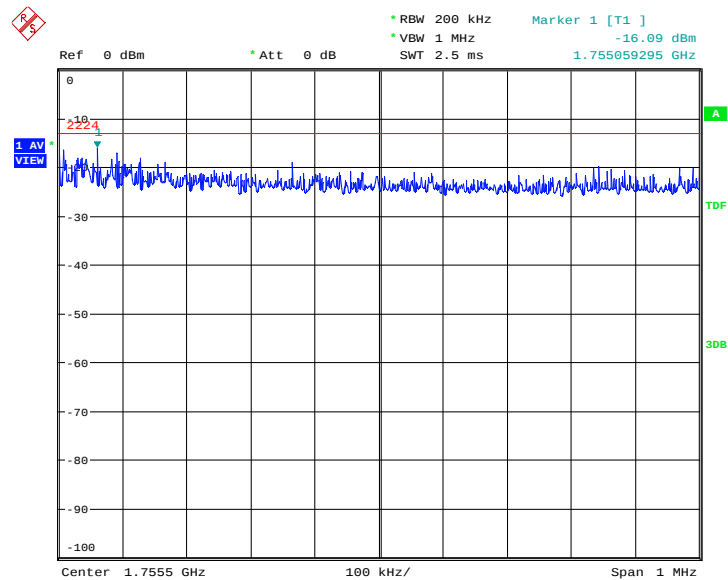


Date: 4.DEC.2013 19:35:49

LTE band 4, 20MHz LOW BAND EDGE BLOCK-QPSK

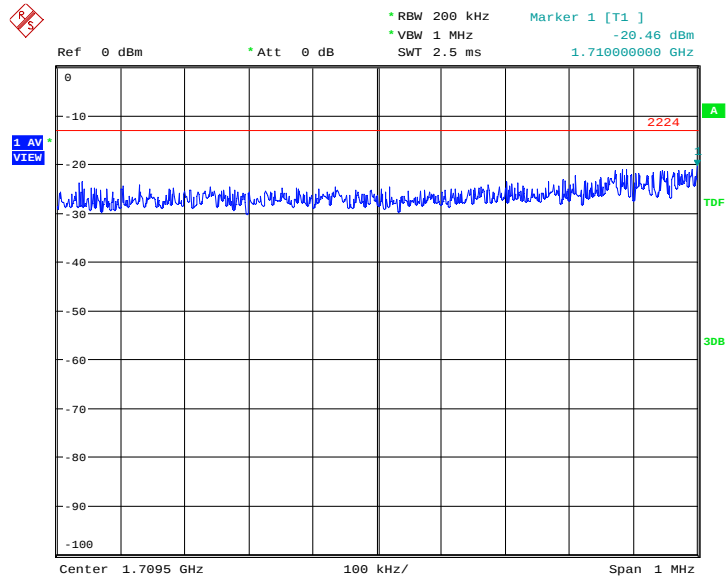


Date: 4.DEC.2013 19:58:40

HIGH BAND EDGE BLOCK-QPSK

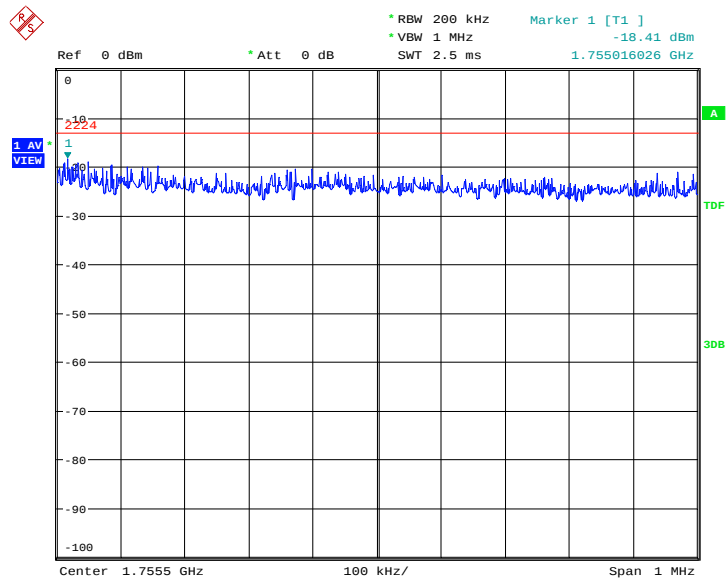


Date: 5.DEC.2013 10:22:22

LOW BAND EDGE BLOCK-16QAM

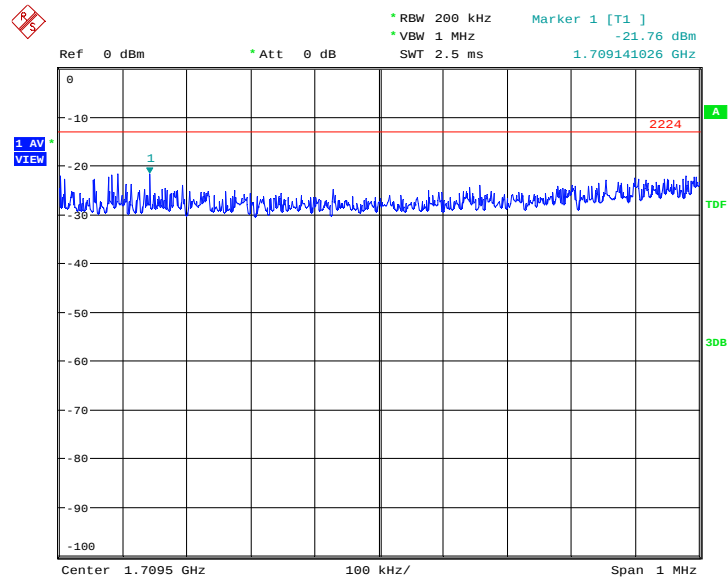

Date: 4.DEC.2013 19:58:50

HIGH BAND EDGE BLOCK-16QAM

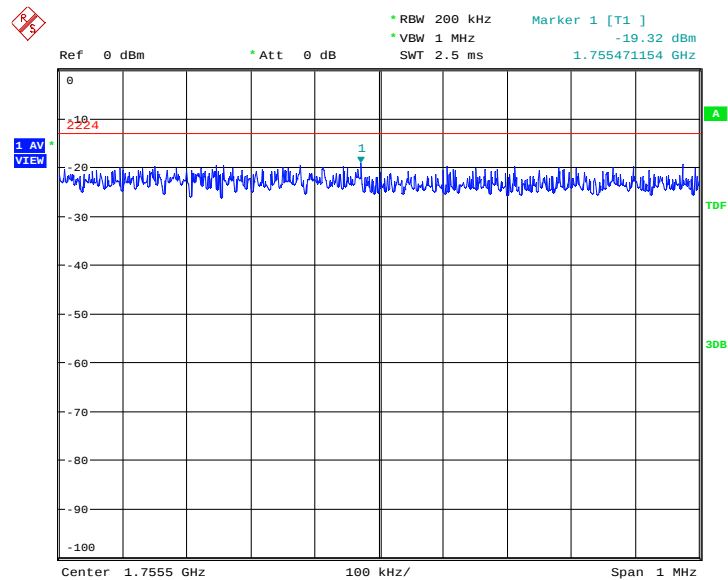

Date: 5.DEC.2013 10:22:32

A.8 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 24.238, 27.53(h).

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

A. 8.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A. 8.3 Measurement result

LTE band 2, 1.4MHz bandwidth

QPSK: 30MHz – 1GHz


Spurious emission limit –13dBm.

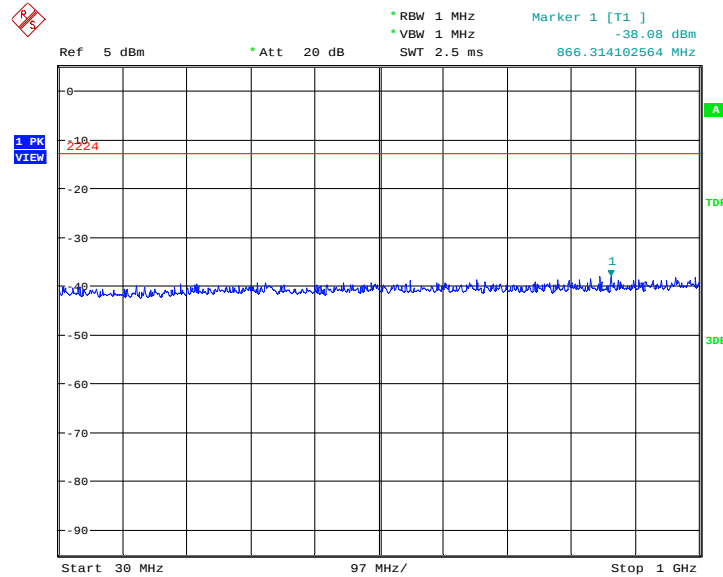

Date: 3.DEC.2013 16:05:07

QPSK: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

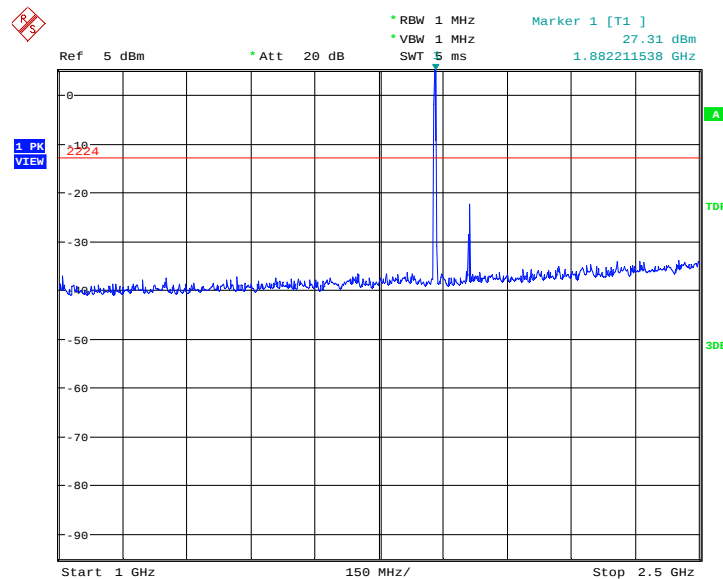

Date: 3.DEC.2013 16:05:14

QPSK: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

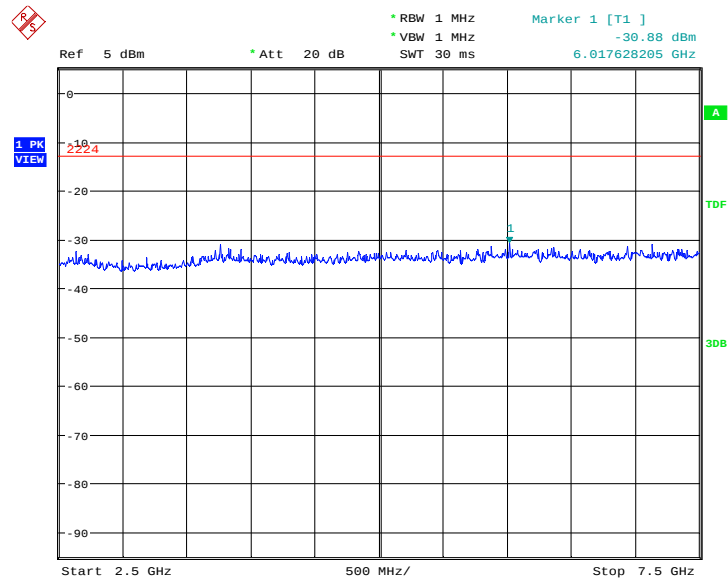

Date: 3.DEC.2013 16:05:21

QPSK: 7.5GHz –10GHz


Spurious emission limit –13dBm.

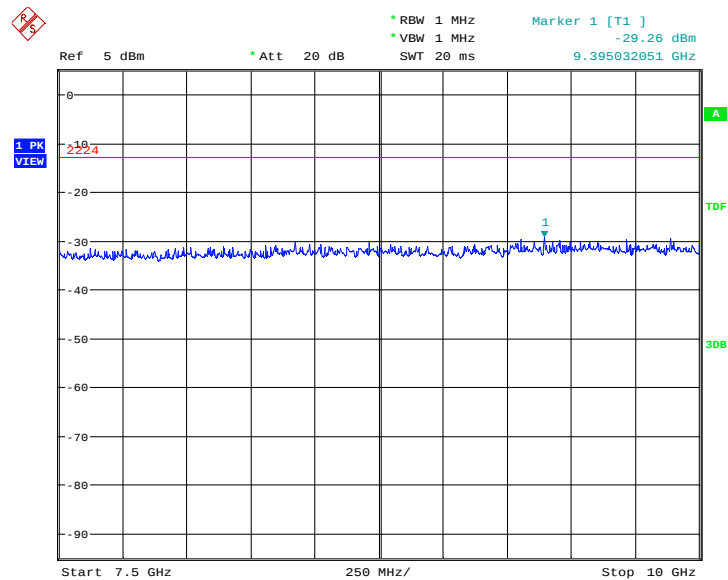

Date: 3.DEC.2013 16:05:27

QPSK: 10GHz –15GHz


Spurious emission limit –13dBm.

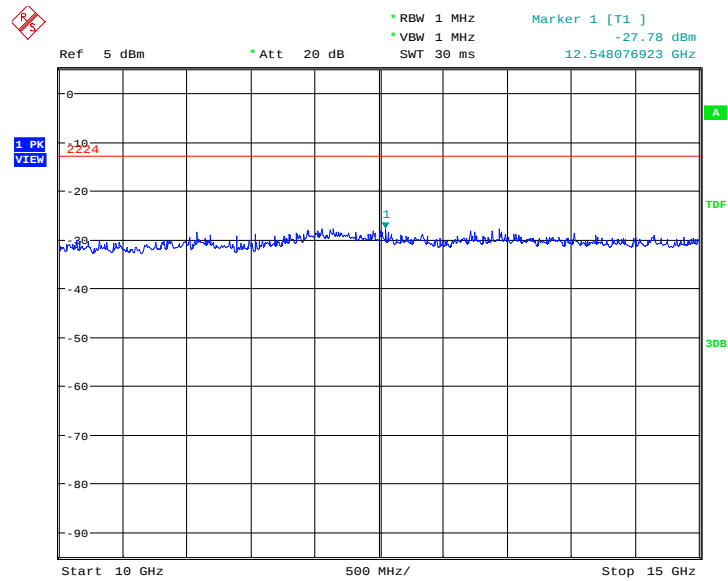

Date: 3.DEC.2013 16:05:34

QPSK: 15GHz –20GHz


Spurious emission limit –13dBm.

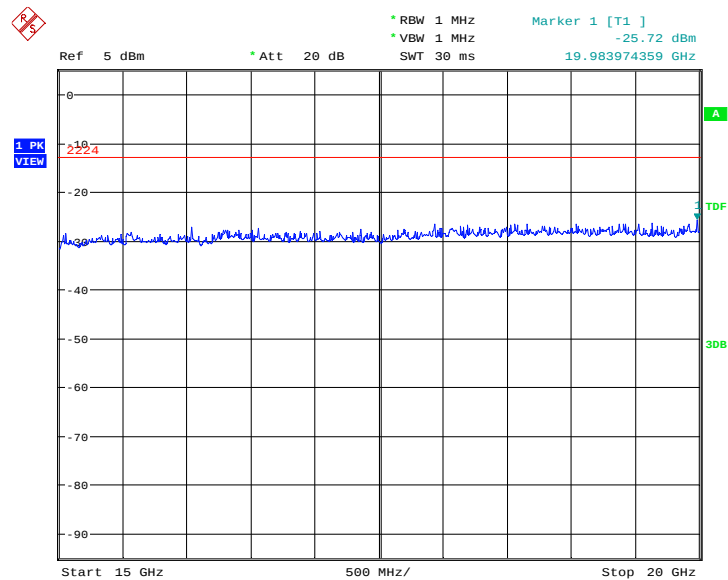

Date: 3.DEC.2013 16:05:41

16QAM: 30MHz – 1GHz


Spurious emission limit –13dBm.

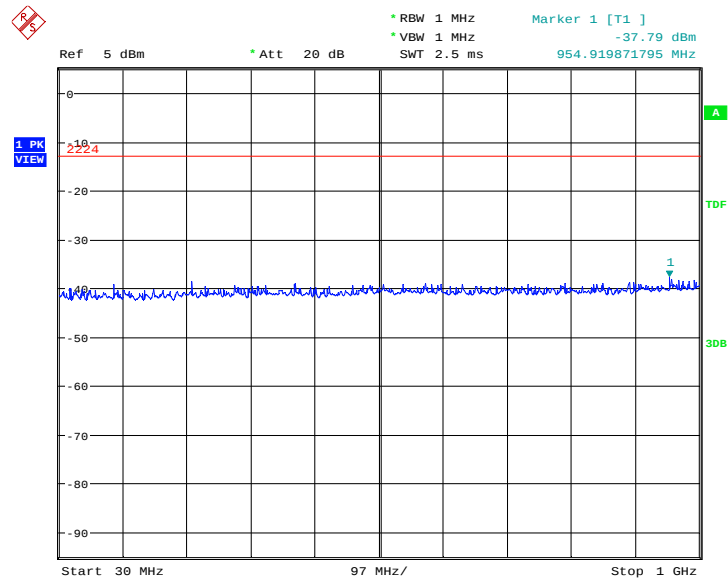

Date: 3.DEC.2013 16:06:33

16QAM: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

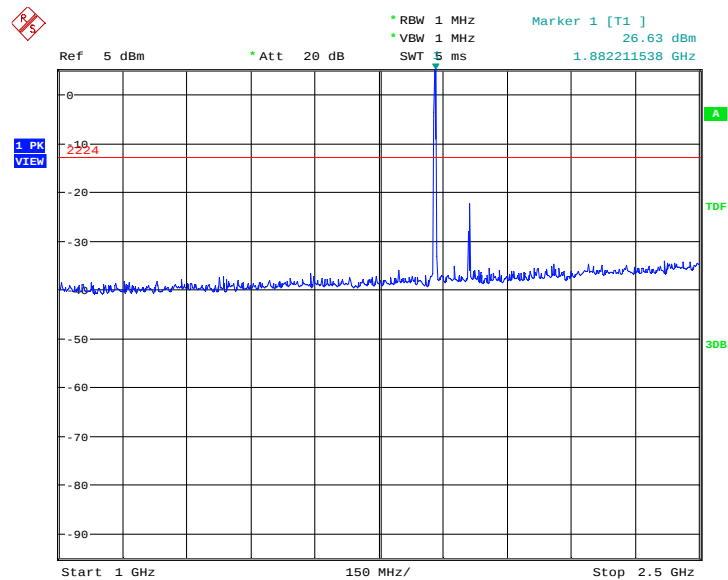

Date: 3.DEC.2013 16:06:40

16QAM: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

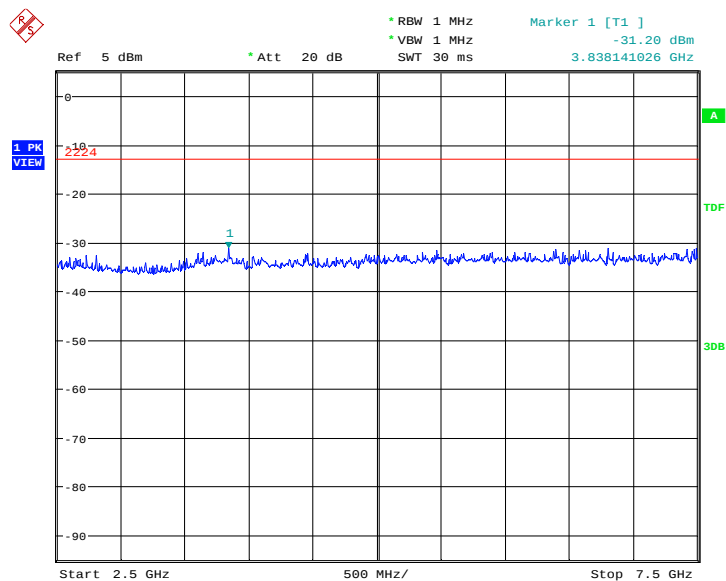

Date: 3.DEC.2013 16:06:47

16QAM: 7.5GHz –10GHz


Spurious emission limit –13dBm.

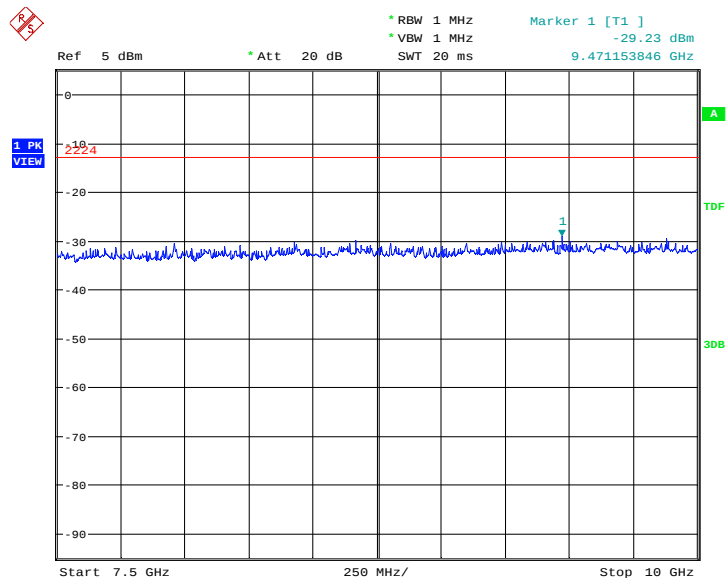

Date: 3.DEC.2013 16:06:53

16QAM: 10GHz –15GHz


Spurious emission limit –13dBm.

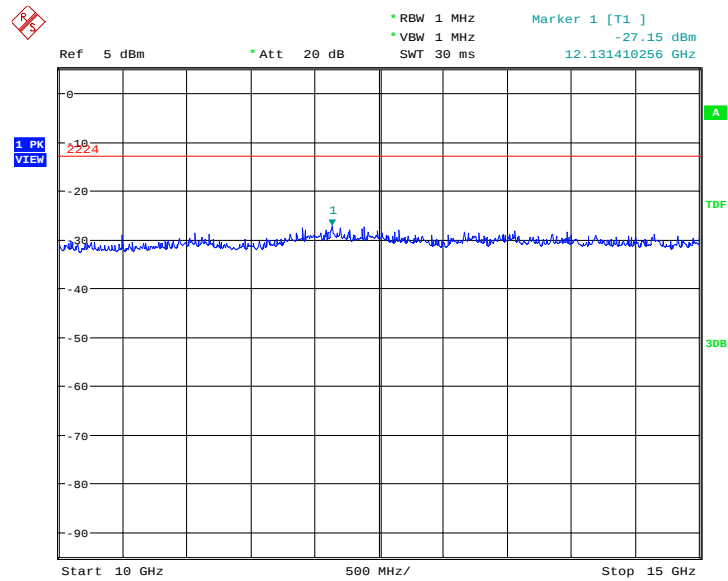

Date: 3.DEC.2013 16:07:00

16QAM: 15GHz –20GHz

Spurious emission limit –13dBm.

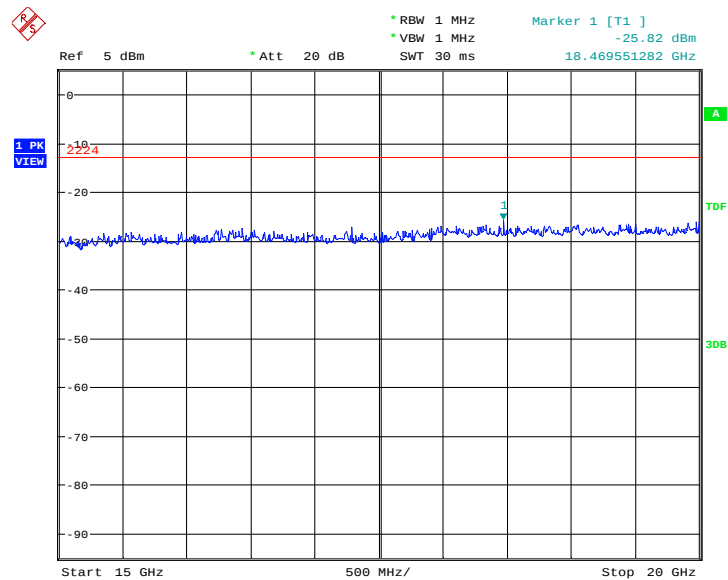


Date: 3.DEC.2013 16:07:07

LTE band 4, 1.4MHz bandwidth

QPSK: 30MHz – 1GHz


Spurious emission limit –13dBm.

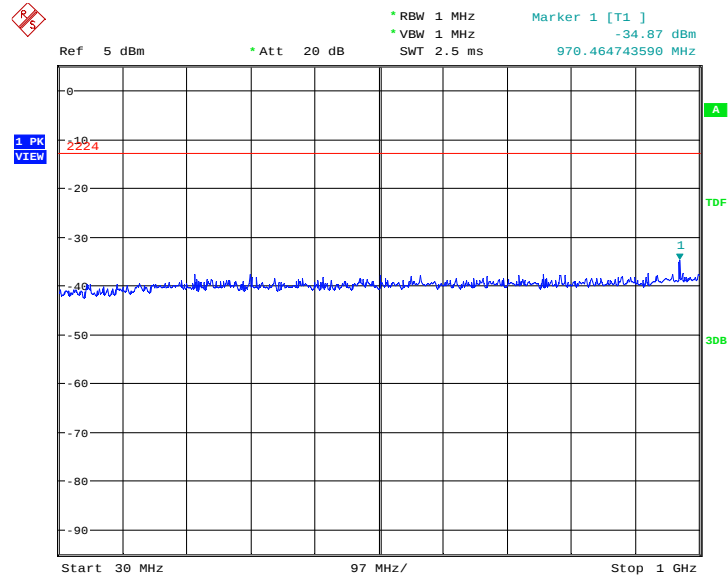

Date: 4.DEC.2013 16:12:14

QPSK: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

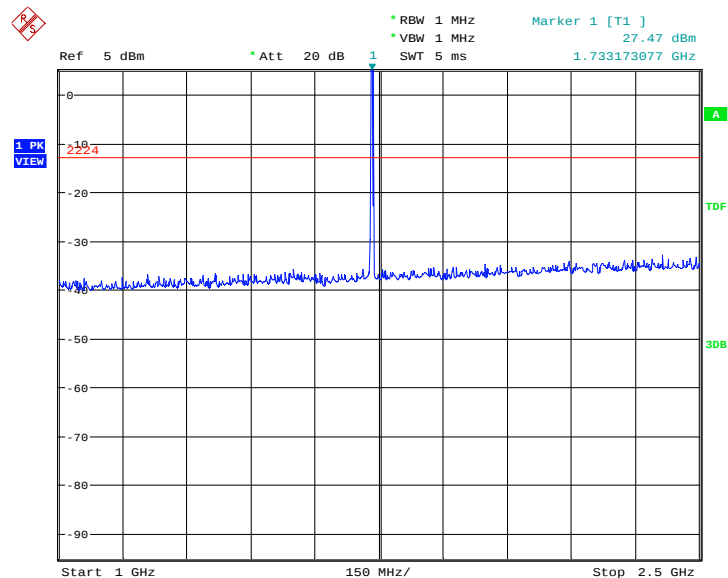

Date: 4.DEC.2013 16:12:20

QPSK: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

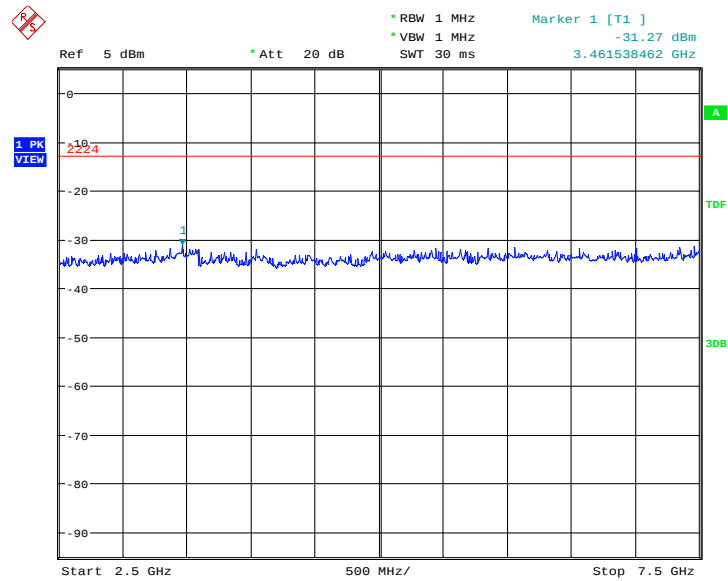

Date: 4.DEC.2013 16:12:27

QPSK: 7.5GHz –10GHz


Spurious emission limit –13dBm.

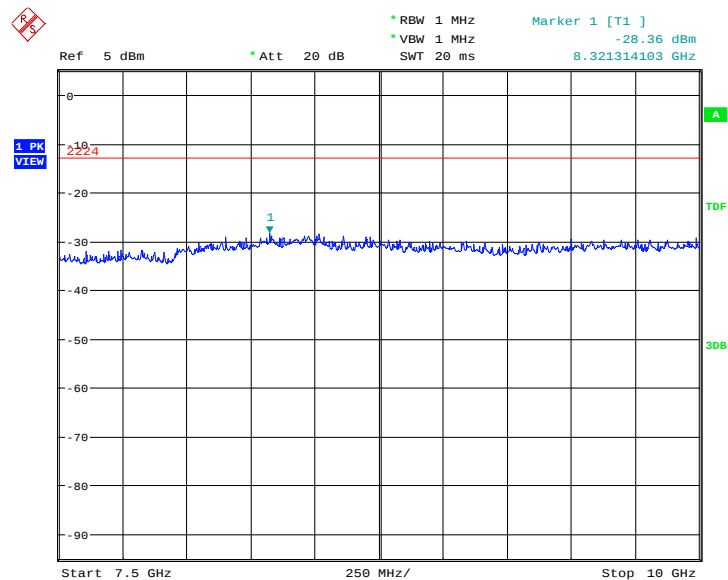

Date: 4.DEC.2013 16:12:34

QPSK: 10GHz –15GHz


Spurious emission limit –13dBm.

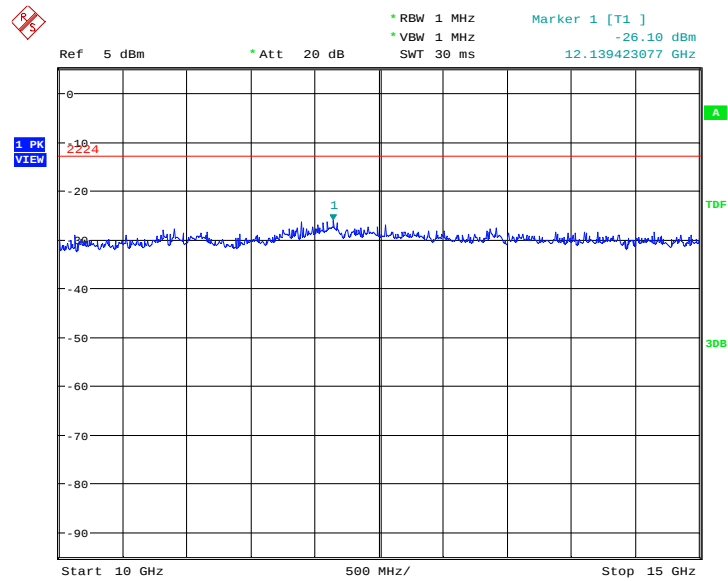

Date: 4.DEC.2013 16:12:41

QPSK: 15GHz –20GHz


Spurious emission limit –13dBm.

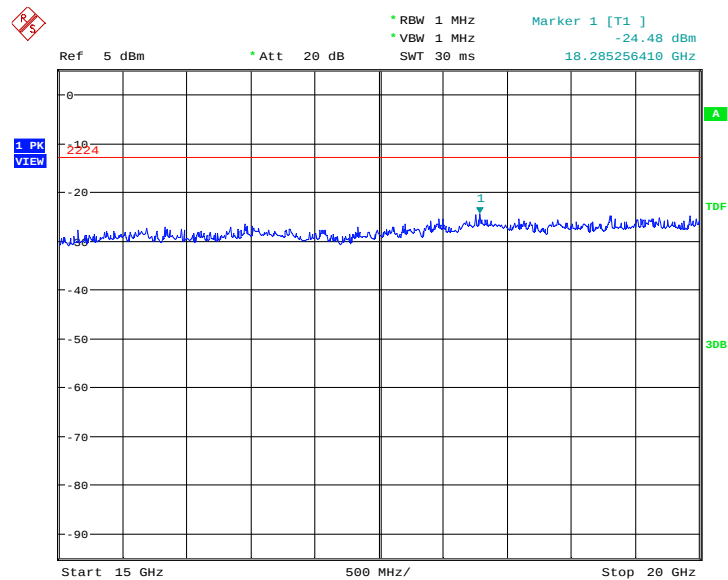

Date: 4.DEC.2013 16:12:48

16QAM: 30MHz – 1GHz


Spurious emission limit –13dBm.

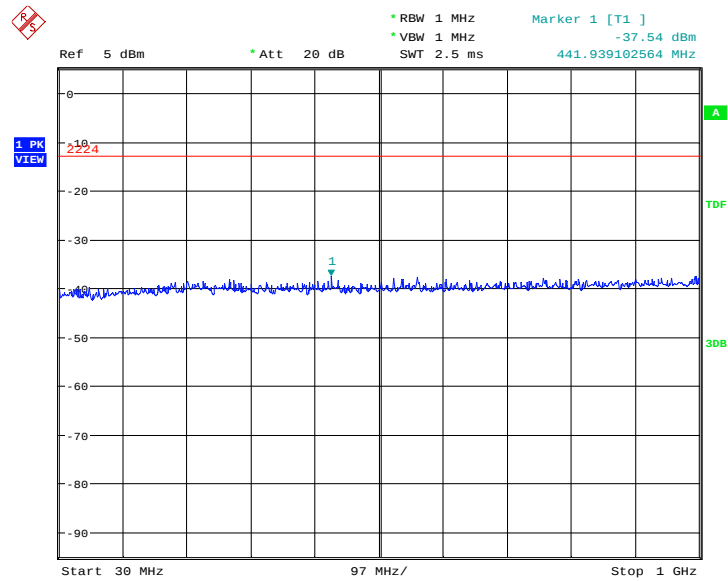

Date: 4.DEC.2013 16:13:40

16QAM: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

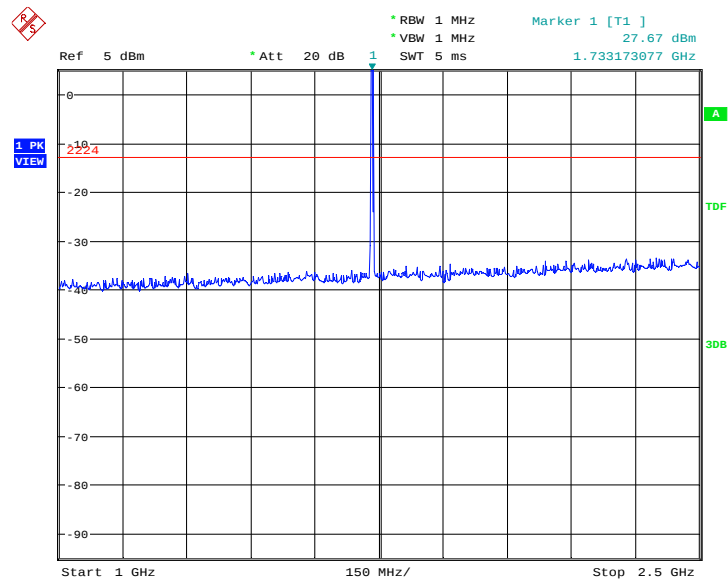

Date: 4.DEC.2013 16:13:47

16QAM: 2.5GHz – 7.5GHz


Spurious emission limit –13dBm.

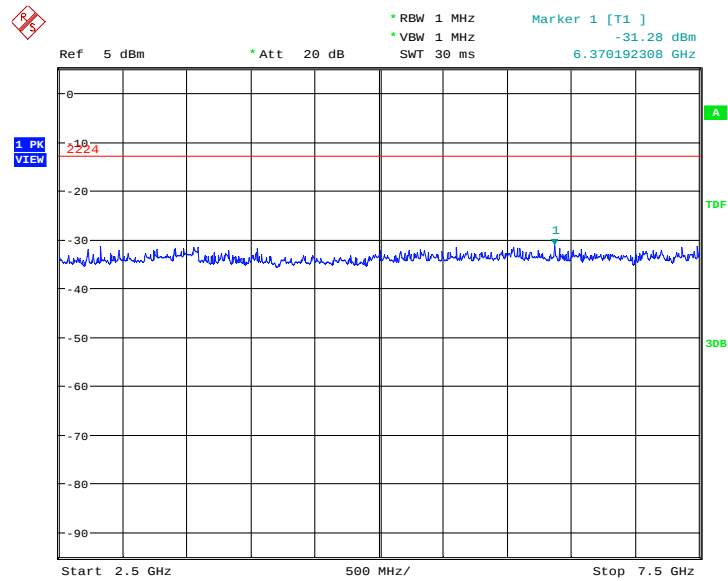

Date: 4.DEC.2013 16:13:54

16QAM: 7.5GHz –10GHz


Spurious emission limit –13dBm.

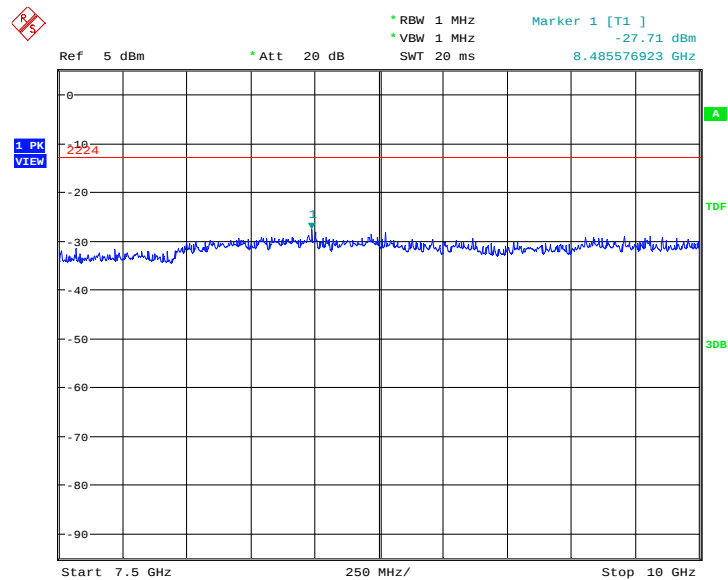

Date: 4.DEC.2013 16:14:00

16QAM: 10GHz –15GHz


Spurious emission limit –13dBm.

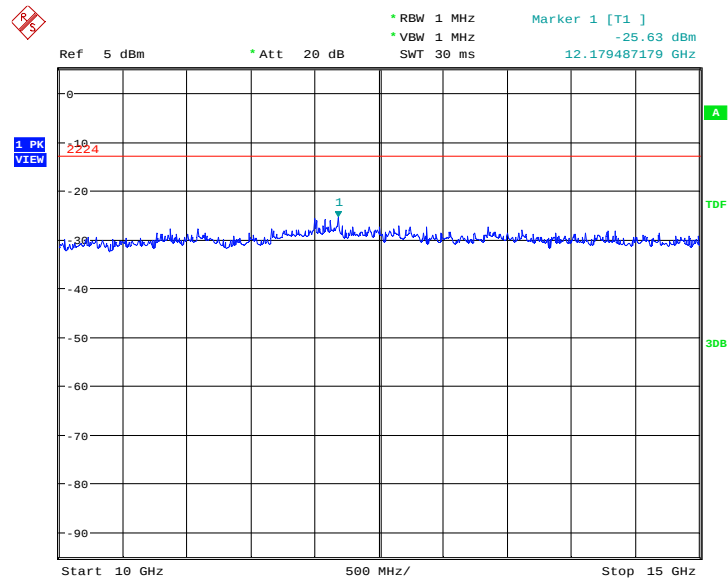

Date: 4.DEC.2013 16:14:07

16QAM: 15GHz –20GHz

Spurious emission limit –13dBm.

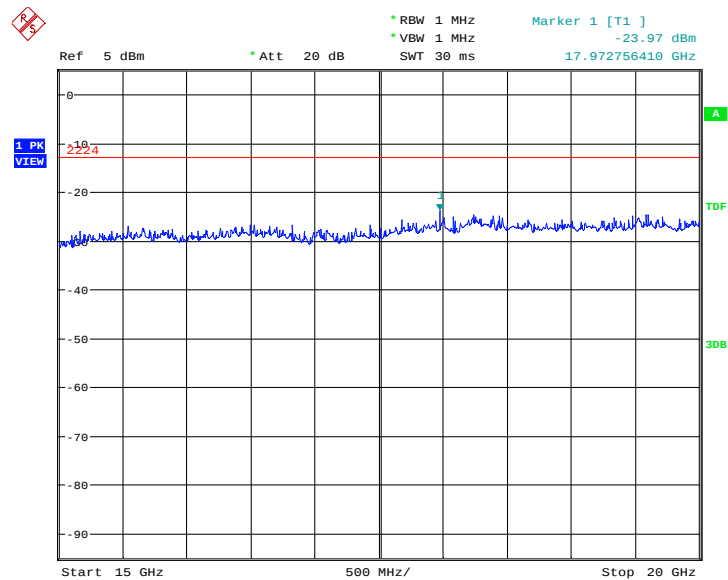

Date: 4.DEC.2013 16:14:14

END OF REPORT