



# TEST REPORT

No. 2013EEB00643-EMC

for

**TCT Mobile Limited**

**HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone**

**Model Name: Yaris-3.5**

**Marketing Name: 4015T**

**FCC ID: RAD436**

with

**Hardware Version: 05 (PIO)**

**Software Version: vC28**

**Issued Date: 2014-01-26**

**Test Laboratory:**

*FCC 2.948 Listed: No.310359*

*IC O.A.T.S listed: No.6629C-1*

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>5</b>
<b>3.4. EUT SET-UPS .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>11</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Shenzhen, Telecommunication Metrology Center of MIIT  
Address: No. 12 Building, Shangsha Innovation and Technology Park, Futian District  
Postal Code: 518048  
Telephone: +86(0)755-33322000  
Fax: +86(0)755-33322001


### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data

Testing Start Date: 2013-11-01  
Testing End Date: 2014-01-24

### 1.4. Signature



---

Du Zhaoxuan


(Prepared this test report)



---

Zhang Bojun

(Reviewed this test report)



---

Lu Minniu

Director of the laboratory

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
Contact: Gong Zhizhou  
Email: zhizhou.gong@tcl.com  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone
Model Name	Yaris-3.5
Marketing Name	4015T
FCC ID	RAD436

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	013929000057567	05 (PIO)	vC28

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>
AE1	Battery	/
AE2	Travel charger	/
AE3	USB cable	/

##### AE1-1

Model	CAB1400002C1
Manufacturer	BYD
Capacitance	1400mAh
Nominal voltage	3.7V

##### AE1-2

Model	CAB60BA000C1
Manufacturer	SCUD
Capacitance	1400mAh
Nominal voltage	3.7V

##### AE2

Model	CBA0016AG0C2
Manufacturer	TENPAO
Length of cable	102cm

##### AE3

Model	CDA3122006C2
Manufacturer	Shenghua,
Length of cable	102cm

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1+ AE1 + AE2	Charging mode
Set.2	EUT1+ AE1 + AE3	USB mode

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-2012 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (11.20 meters×6.10meters×5.60meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 6 GHz, 3 m distance



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Radiated Emission	15.109(a)	A.1	P
2	Conducted Emission	15.107(a)	A.2	P

**7. Test Equipments Utilized**

<b>NO.</b>	<b>Description</b>	<b>TYPE</b>	<b>SERIES NUMBER</b>	<b>MANUFACTURE</b>	<b>CAL DUE DATE</b>	<b>CAL PERIOD</b>
1	Test Receiver	ESCI	100701	R&S	2014.07.31	1 year
2	Test Receiver	ESCI	100702	R&S	2014.07.31	1 year
3	Test Receiver	FSP 40	100378	R&S	2014.12.20	1 year
4	BiLog Antenna	VULB9163	9163 330	Schwarzbeck	2014.02.24	3 years
5	LISN	ESH2-Z5	100196	R&S	2014.01.23	1 year
6	Dual-Ridge Waveguide Horn Antenna	3117	00066577	ETS-Lindgren	2016.04.01	3 years
7	Universal Radio Communication Tester	E5515C	GB44051324	Agilent	2014.05.21	1 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **Reference**

FCC: CFR Part 15.109(a)

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

\*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/1MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Note: the result contains vertical part and Horizontal part

#### Set.1 Charging mode / Average detector

Frequency(MHz)	Result(dBuV/m)	$A_{\text{Rpl}}$ (dB)	$P_{\text{mea}}$ (dBuV)	Polarity
16744	47.4	14.3	33.1	H
15738	46.9	13.2	33.7	H
13678	43.5	11.5	32	V
10519	39.8	10.1	29.7	V
8041.75	37.7	7.5	30.2	V
2356.5	36.7	1.7	35	V

#### Set.1 Charging mode / Peak detector

Frequency(MHz)	Result(dBuV/m)	$A_{\text{Rpl}}$ (dB)	$P_{\text{mea}}$ (dBuV)	Polarity
17313	60	14.4	45.6	H
16246	59.5	13.7	45.8	V
16632	59.4	14.2	45.2	H
16749	59.4	14.3	45.1	H
16735	59.3	14.3	45	V
17504	59.3	14.5	44.8	V

**Set.2 USB mode/ Average detector**

Frequency(MHz)	Result(dBuV/m)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBuV)	Polarity
16757	47.9	14.3	33.6	V
16214	47.6	13.7	33.9	H
15679	47	13.1	33.9	H
13671	43.6	11.5	32.1	H
1500	41.7	-3.4	45.1	V
6000.375	41.3	7.2	34.1	V

**Set.2 USB mode/ Peak detector**

Frequency(MHz)	Result(dBuV/m)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBuV)	Polarity
17354	60.1	14.4	45.7	V
16817	59.9	14.3	45.6	V
17295	59.9	14.3	45.6	V
17716	59.4	14.5	44.9	V
17189	59.3	14.2	45.1	H
16779	59.2	14.3	44.9	H

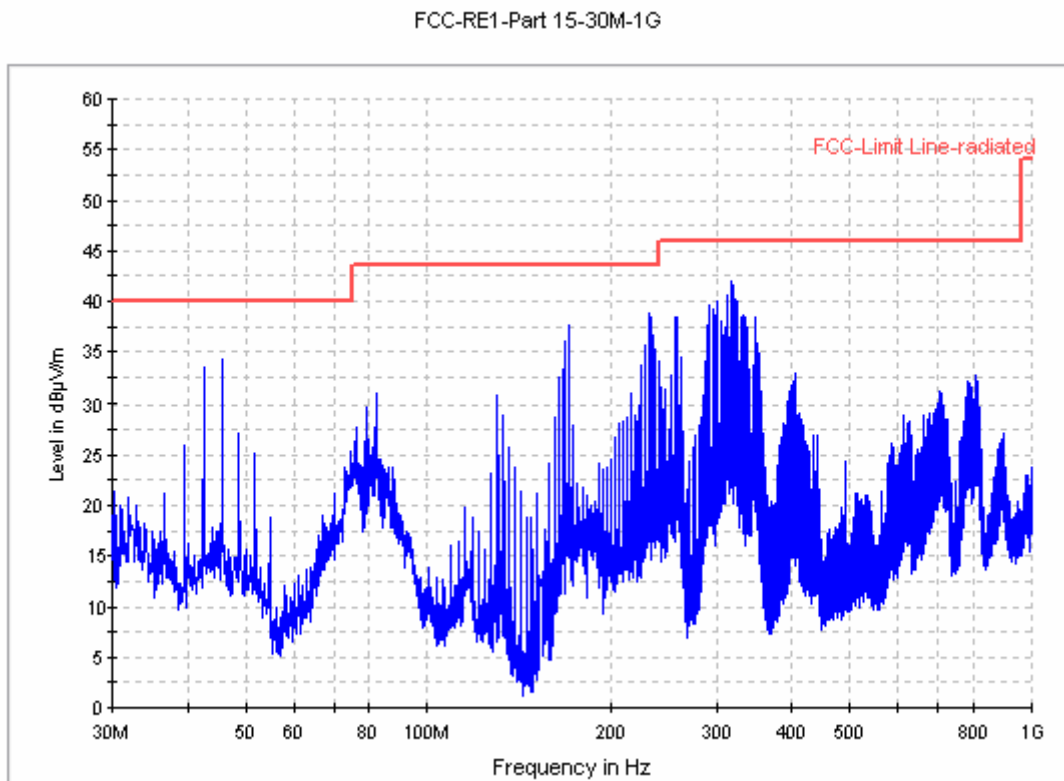


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

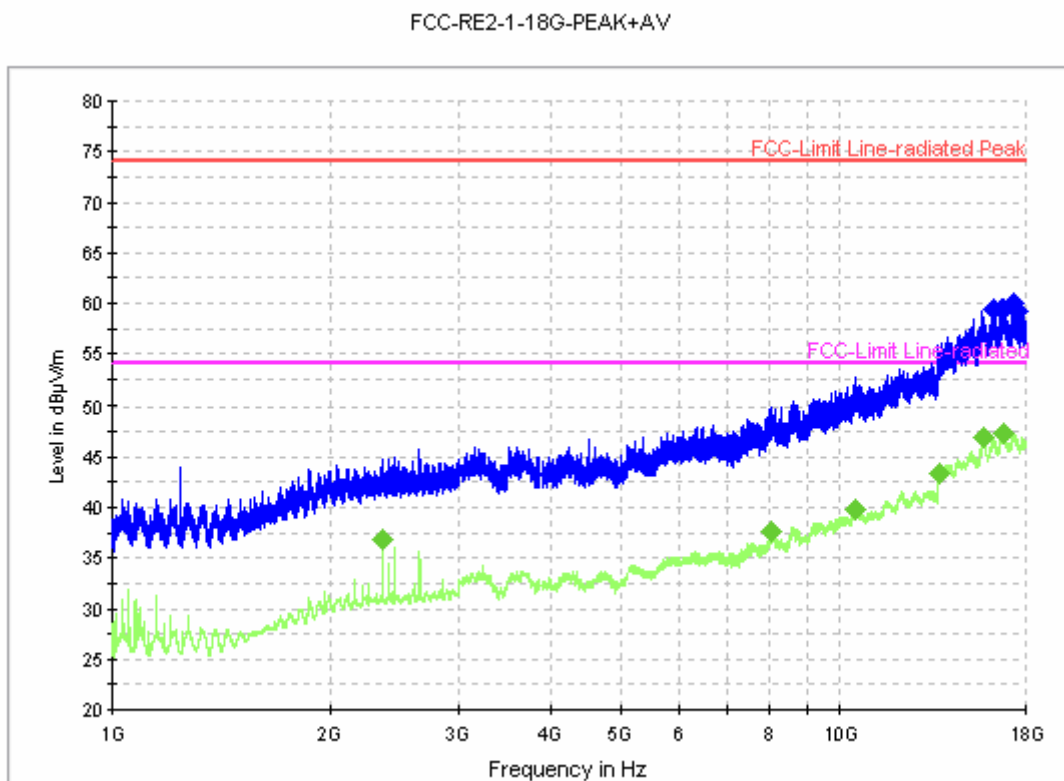


Figure A.2 Radiated Emission from 1GHz to 18GHz (Set.1, Charging mode)

FCC Part15 30MHz-1GHz

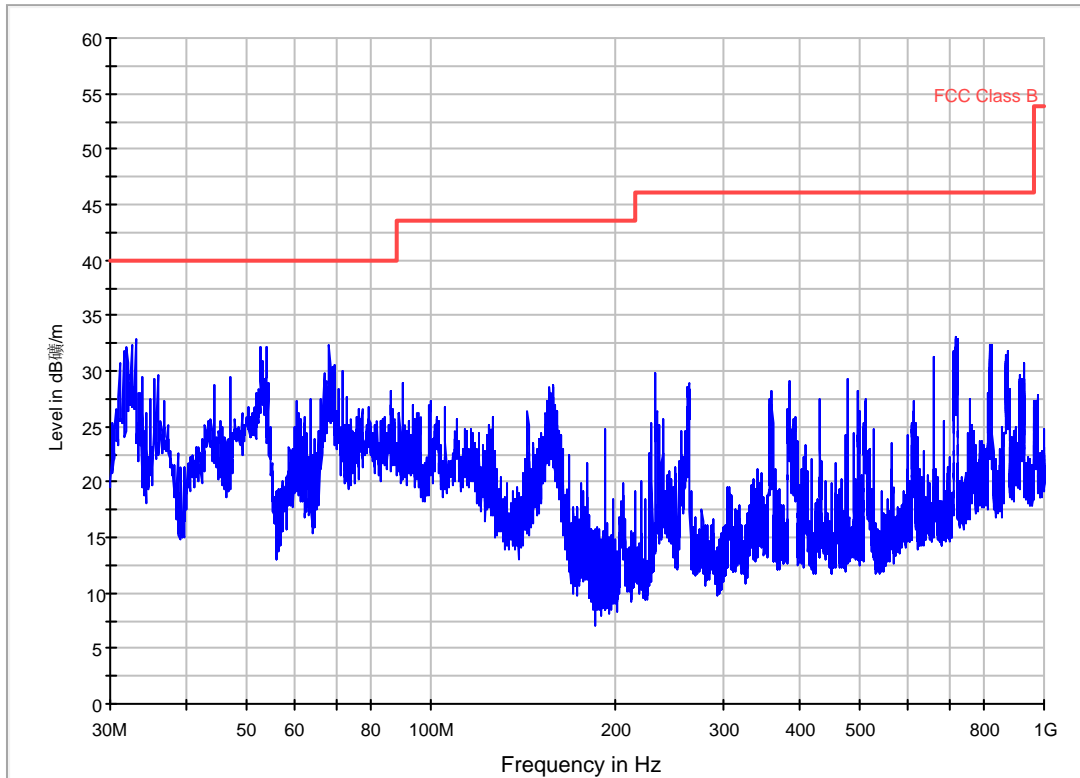


Figure A.3 Radiated Emission from 30MHz to 1GHz (Set.2, USB mode)

FCC-RE2-1-18G-PEAK+AV

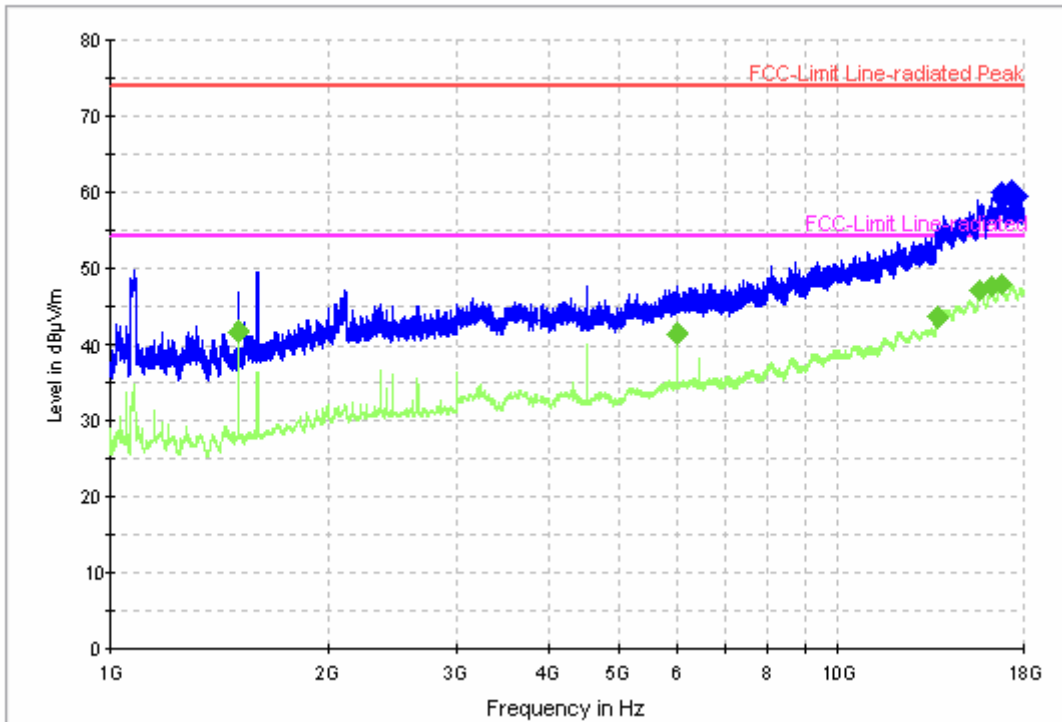


Figure A.4 Radiated Emission from 1GHz to 18GHz (Set.2, USB mode)

## A.2 Conducted Emission (§15.107(a))

### Reference

FCC: CFR Part 15.107(a)

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

### A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode


Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1



### A.2.5 Measurement Results

ESH2-Z5 Scan-FCC

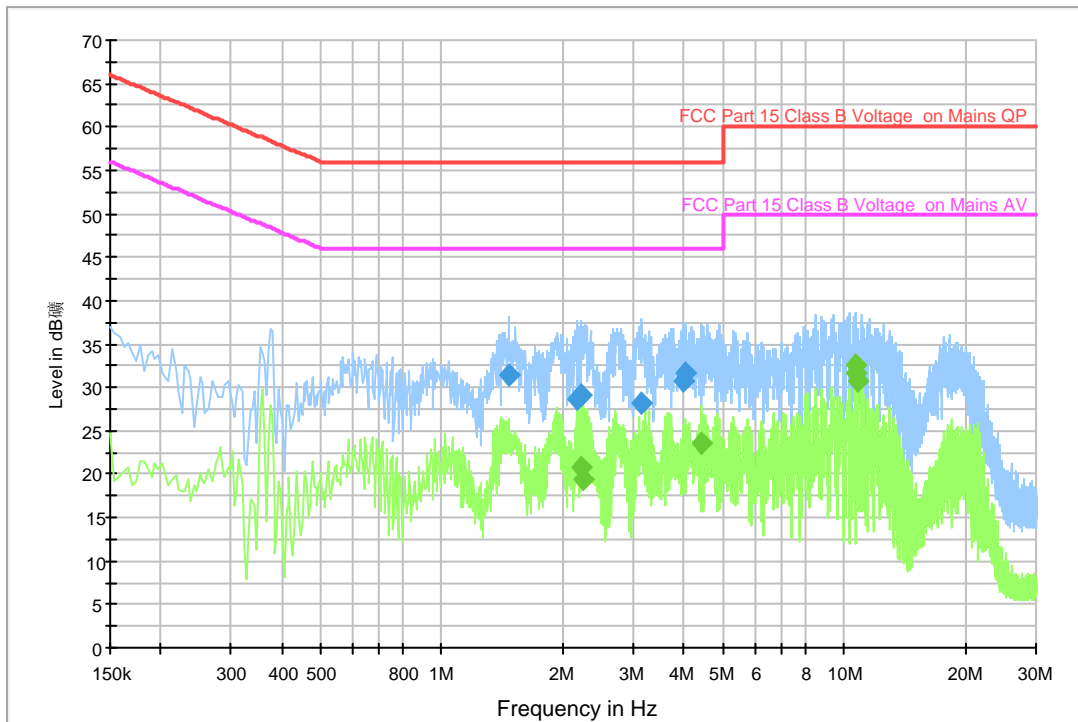


**Figure A.5 Conducted Emission (Set.1, Charging mode)**

#### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.474000	31.4	FLO	L1	10.1	24.6	56.0
2.178000	28.8	FLO	L1	10.1	27.2	56.0
2.222000	29.1	FLO	L1	10.1	26.9	56.0
3.122000	28.2	FLO	L1	10.2	27.8	56.0
4.006000	30.7	FLO	L1	10.2	25.3	56.0
4.026000	31.6	FLO	L1	10.2	24.4	56.0

#### Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.222000	20.8	FLO	L1	10.1	25.2	46.0
2.238000	19.4	FLO	L1	10.1	26.6	46.0
4.422000	23.5	FLO	L1	10.2	22.5	46.0
10.710000	32.5	FLO	L1	10.3	17.5	50.0
10.730000	31.6	FLO	L1	10.3	18.4	50.0
10.750000	30.7	FLO	L1	10.3	19.3	50.0

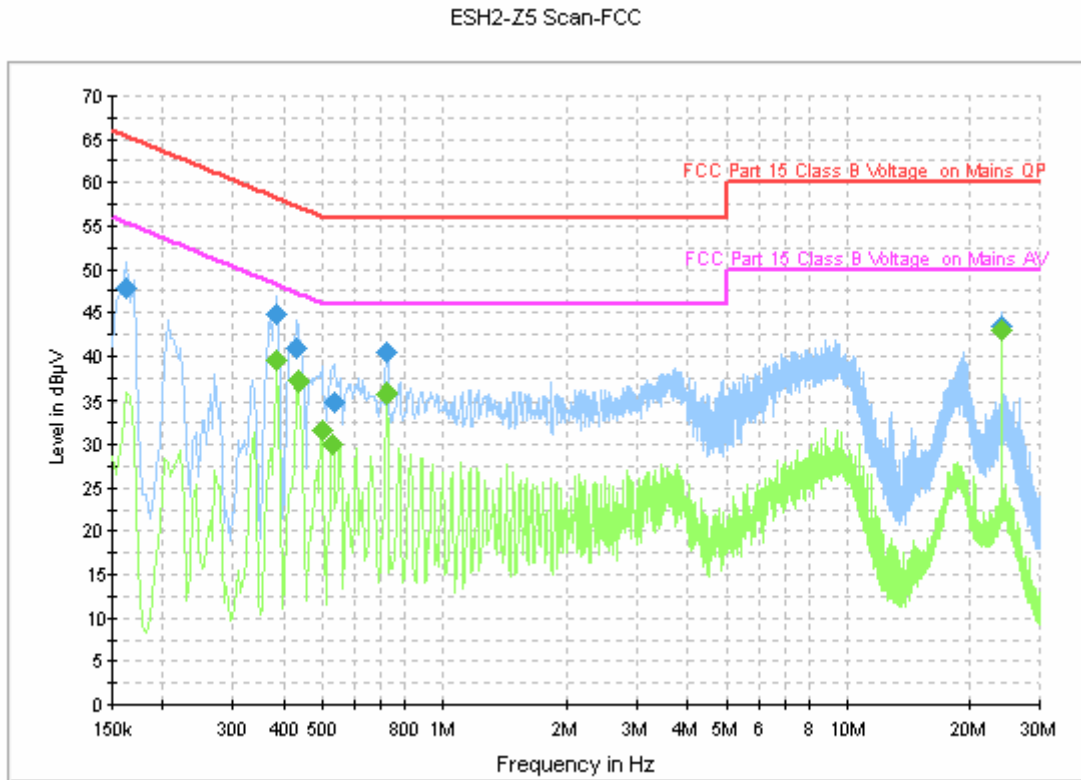

**Figure A.6 Conducted Emission (Set.2, USB mode)**

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.162000	47.7	FLO	L1	10.0	17.6	65.4
0.386000	44.9	FLO	N	10.0	13.3	58.1
0.430000	41.0	FLO	L1	10.0	16.3	57.3
0.534000	35.0	FLO	L1	10.1	21.0	56.0
0.722000	40.4	FLO	L1	10.0	15.6	56.0
24.002000	43.5	FLO	N	10.6	16.5	60.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.386000	39.6	FLO	N	10.0	8.6	48.1
0.434000	37.2	FLO	L1	10.0	10.0	47.2
0.498000	31.7	FLO	L1	10.0	14.3	46.0
0.530000	29.9	FLO	L1	10.0	16.1	46.0
0.722000	35.9	FLO	L1	10.0	10.1	46.0
24.002000	43.0	FLO	L1	10.6	7.0	50.0

\*\*\*END OF REPORT\*\*\*