

FCC RF Test Report

APPLICANT : TCT Mobile Limited
EQUIPMENT : Tablet PC
BRAND NAME : ALCATEL
MODEL NAME : ONE TOUCH EVO 7HD / ONE TOUCH E710
FCC ID : RAD381
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 22, 2013 and completely tested on May 21, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Testing Site 6

 1.6 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency Channel 7

 2.2 Pre-Scanned RF Power 8

 2.3 Test Mode 9

 2.4 Connection Diagram of Test System 10

 2.5 Support Unit used in test configuration and system 11

 2.6 RF Utility 11

 2.7 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Output Power Measurement..... 22

 3.3 Power Spectral Density Measurement 25

 3.4 Conducted Band Edges and Spurious Emission Measurement 40

 3.5 Radiated Band Edges and Spurious Emission Measurement 57

 3.6 AC Conducted Emission Measurement..... 89

 3.7 Antenna Requirements 93

4 LIST OF MEASURING EQUIPMENT 94

5 UNCERTAINTY OF EVALUATION 95

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	Under limit 4.78 dB at 4874.000 MHz
		Radiated Spurious Emission			
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.41 dB at 0.700 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

TCT Mobile Limited

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

1.2 Manufacturer

TCL COMMUNICATION TECHNOLOGY HOLDINGS LIMITED

70 Huifeng 4rd, ZhongKai Hi-tech Development District, Huizhou, Guangdong 516006 P.R.China (TCL Mobile Communication Co., LTD. Huizhou)

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	ALCATEL
Model Name	ONE TOUCH EVO 7HD / ONE TOUCH E710
FCC ID	RAD381
EUT supports Radios application	WLAN 11bgn / Bluetooth
HW Version	JUPITER_MAIN_V6.0
SW Version	UPDATA_111_104
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The model names (ONE TOUCH EVO 7HD, ONE TOUCH E710) are identical on hardware. The difference is only for market purpose.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 16.74 dBm (0.0472 W) 802.11g : 23.28 dBm (0.2128 W) 802.11n HT20 : 23.36 dBm (0.2168 W) 802.11n HT40 : 23.43 dBm (0.2203 W)
Antenna Type	PIFA Antenna type with gain 0.9 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-SZ	CO01-SZ	03CH01-SZ	831040/4086F-1

The test site complies with ANSI C63.4 2003 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.38	16.37	15.02	14.45
CH 06	2437 MHz	16.50	16.53	15.2	15.32
CH 11	2462 MHz	16.74	16.71	15.25	15.49

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	23.21	23.18	23.14	23.03	23.01	22.92	23.07	23.02
CH 06	2437 MHz	22.97	22.95	22.91	22.88	22.86	22.85	22.81	22.79
CH 11	2462 MHz	23.28	23.25	23.21	23.17	23.15	23.14	23.10	23.09

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	23.31	23.14	23.16	22.83	22.77	22.75	22.90	23.04
CH 06	2437 MHz	23.15	23.13	23.10	23.07	23.08	23.05	23.04	23.01
CH 11	2462 MHz	23.36	23.25	23.18	22.86	22.81	22.78	22.95	22.99

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		13.5 Mbps	27 Mbps	40.5 Mbps	54 Mbps	81 Mbps	108 Mbps	121.5 Mbps	135 Mbps
CH 03	2422 MHz	22.92	22.84	22.81	22.84	22.79	22.54	22.24	22.17
CH 06	2437 MHz	23.30	23.23	23.21	23.18	23.03	22.92	22.88	22.75
CH 09	2452 MHz	23.43	23.31	23.25	23.19	23.06	22.95	22.83	22.71


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

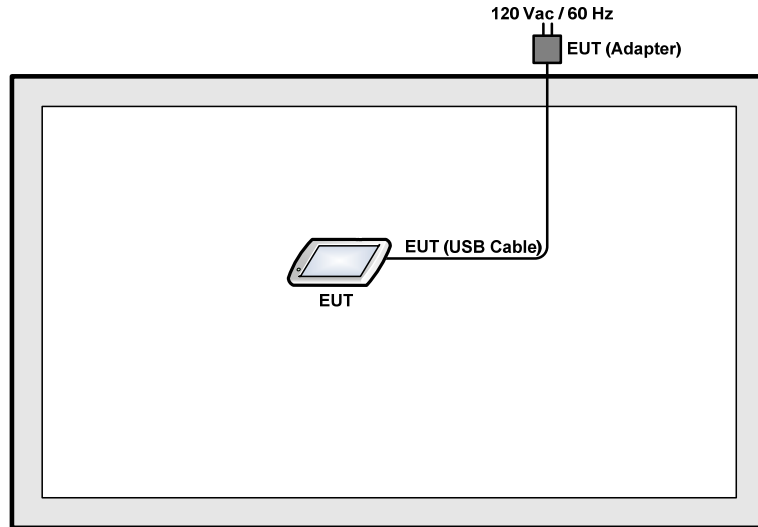

<AC Conducted Emission Mode>

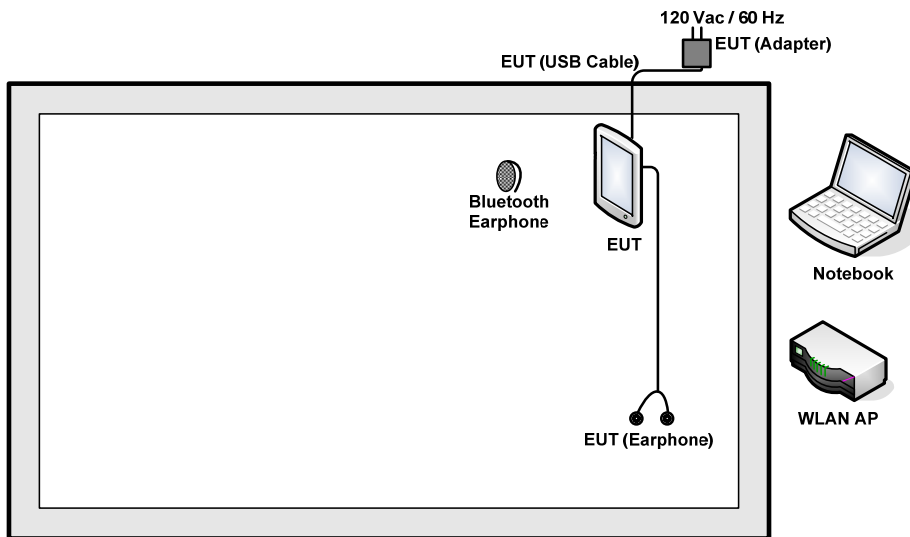

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	Netcore	NW616	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	VOSTRO 1440	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	2010DP1340	N/A	N/A

2.6 RF Utility

For WLAN function, programmed RF utility, execute “adbtool” software to make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 7.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 7.5 + 10 = 17.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

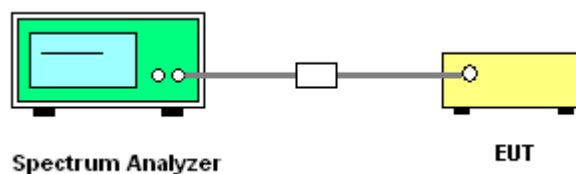




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	9.08	0.5	Pass
06	2437	9.04	0.5	Pass
11	2462	9.08	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

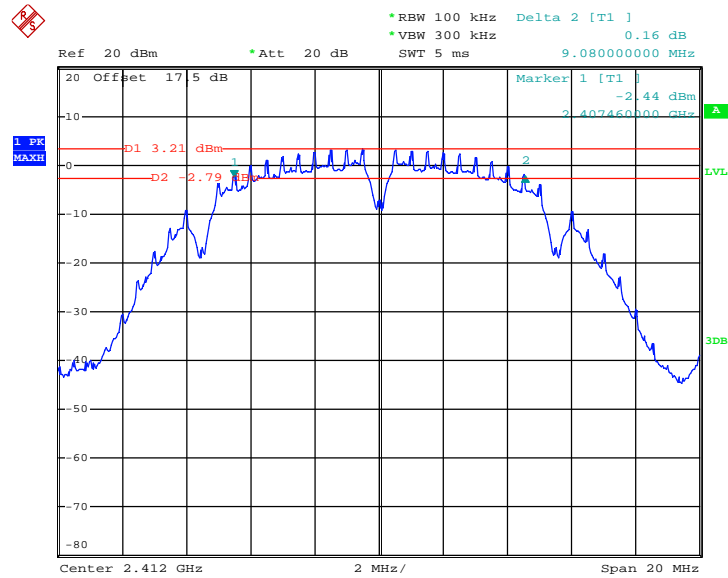

Date: 16.MAY.2013 02:53:10




6 dB Bandwidth Plot on 802.11b Channel 06

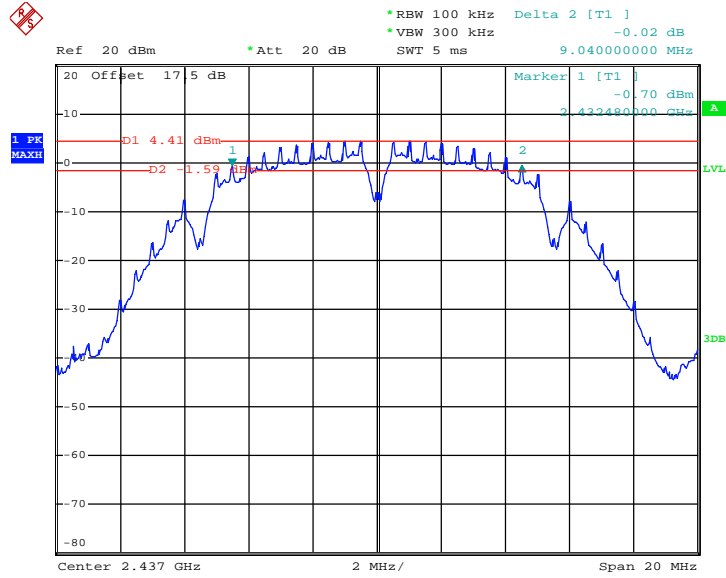

Date: 16.MAY.2013 03:02:27

6 dB Bandwidth Plot on 802.11b Channel 11

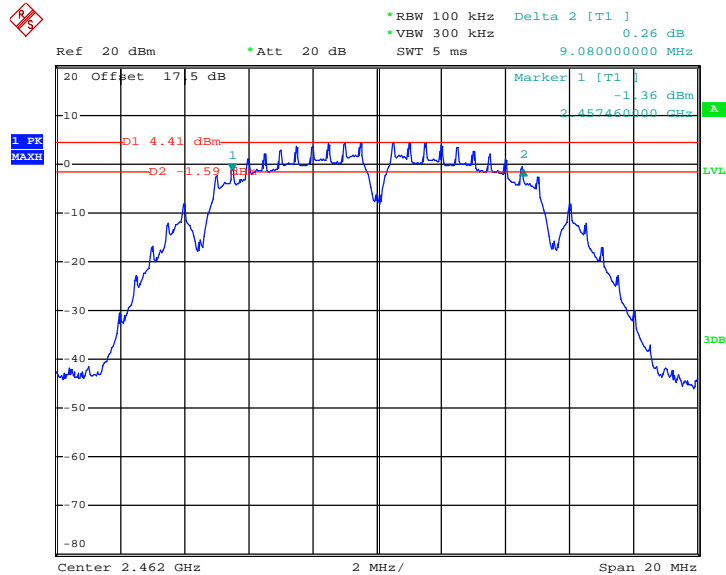


Date: 16.MAY.2013 03:07:12



Test Mode :	802.11g	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.40	0.5	Pass
06	2437	16.48	0.5	Pass
11	2462	16.48	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

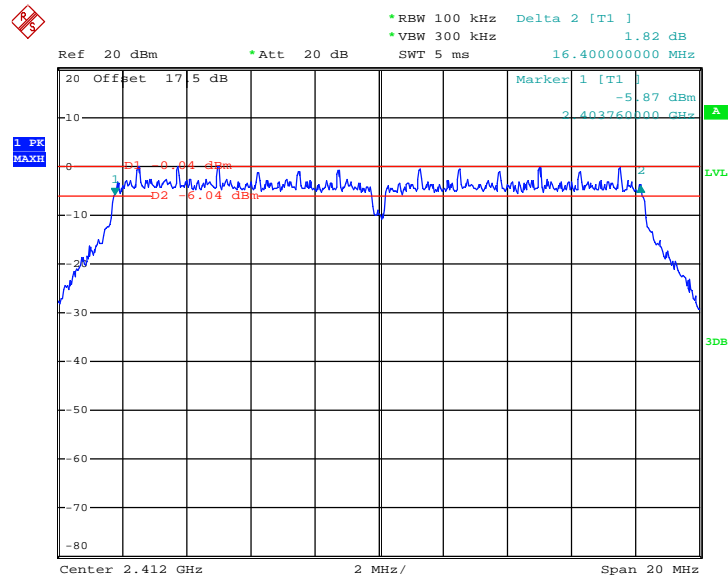

Date: 16.MAY.2013 03:35:26




6 dB Bandwidth Plot on 802.11g Channel 06

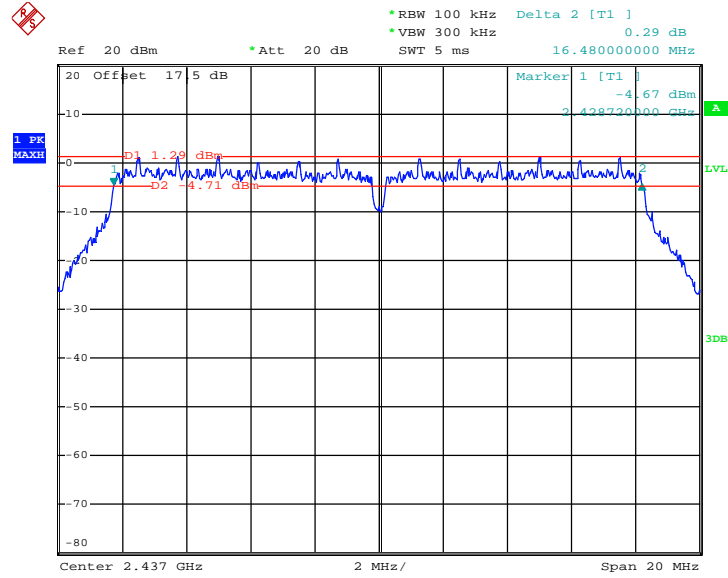

Date: 16.MAY.2013 03:23:56

6 dB Bandwidth Plot on 802.11g Channel 11

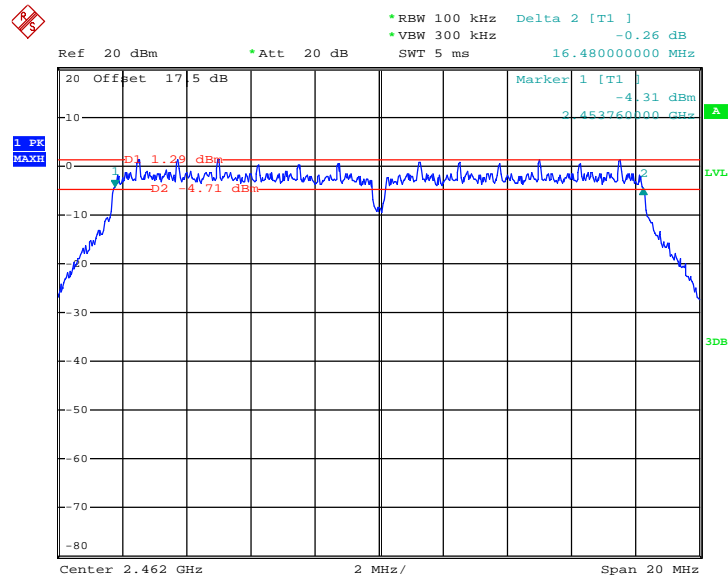


Date: 16.MAY.2013 03:29:42



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.64	0.5	Pass
06	2437	17.64	0.5	Pass
11	2462	17.68	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01

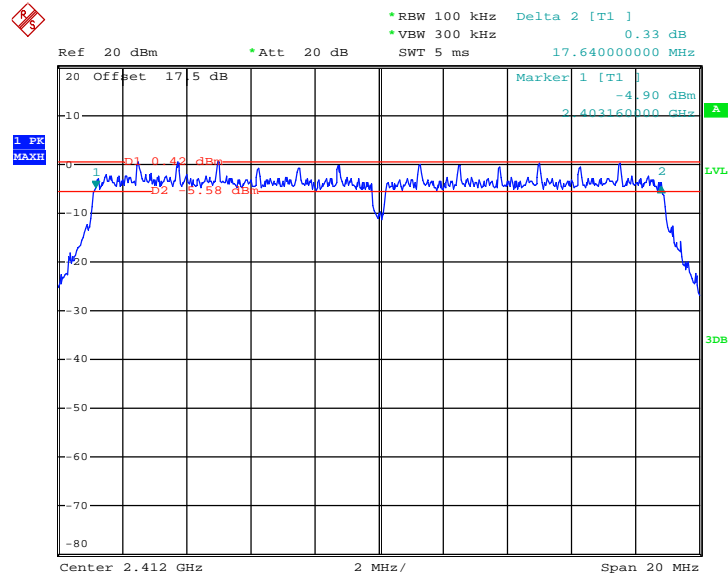

Date: 16.MAY.2013 03:43:01




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

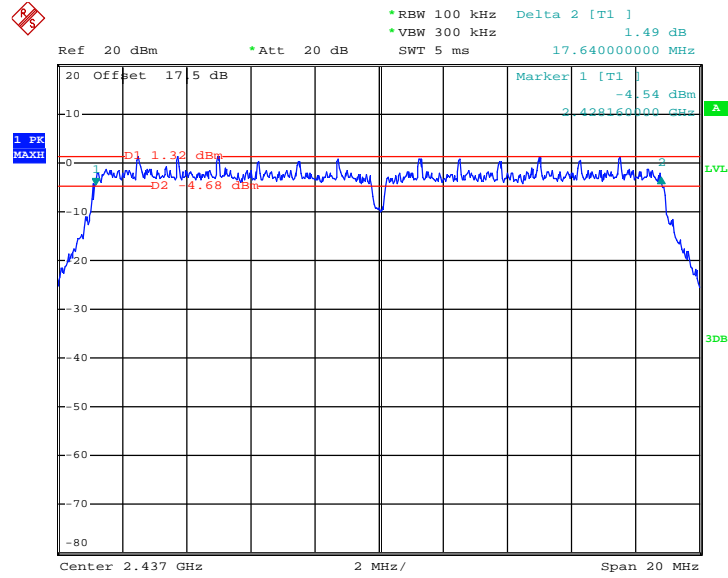

Date: 16.MAY.2013 03:50:30

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

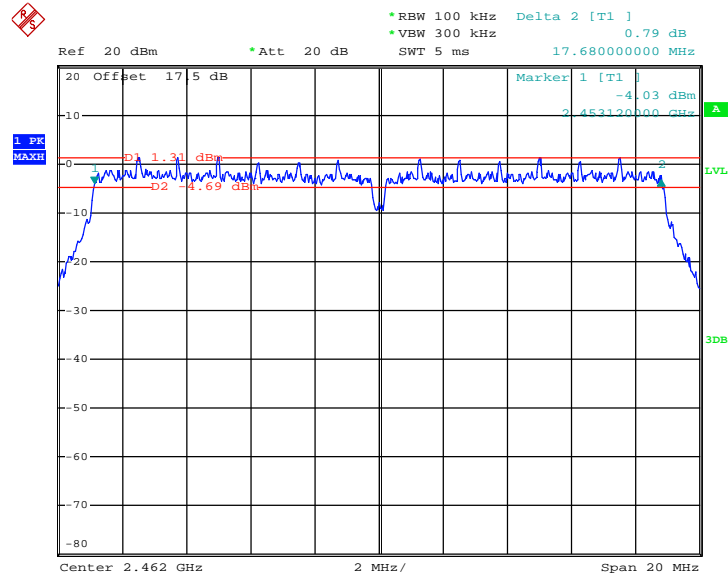


Date: 16.MAY.2013 03:55:46



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n HT40 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
03	2422	35.92	0.5	Pass
06	2437	35.68	0.5	Pass
09	2452	35.64	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT40 Channel 03

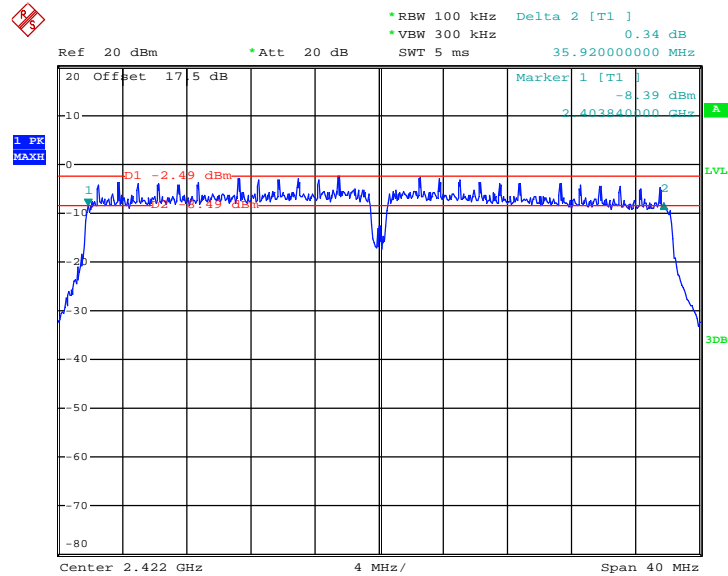

Date: 16.MAY.2013 04:07:08




6 dB Bandwidth Plot on 802.11n HT40 Channel 06

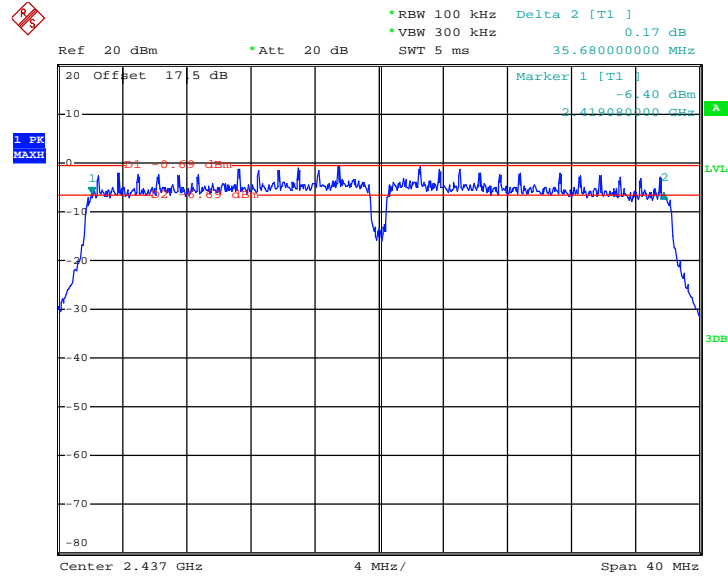

Date: 16.MAY.2013 04:13:52

6 dB Bandwidth Plot on 802.11n HT40Channel 09

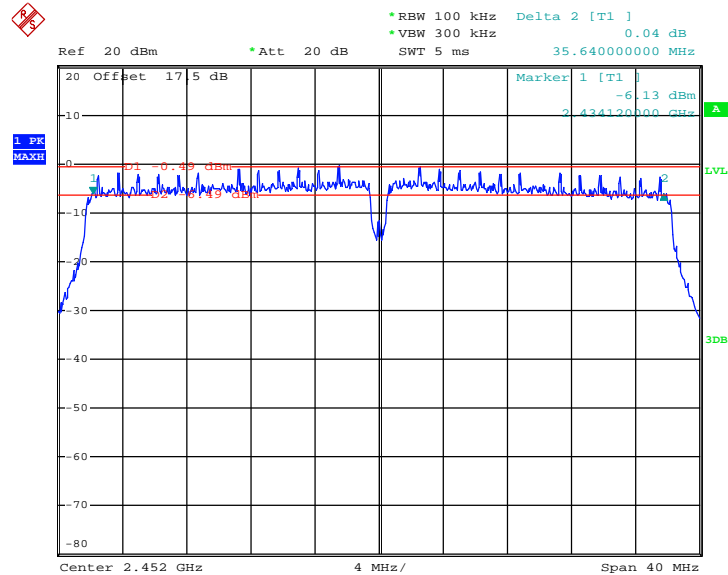

Date: 16.MAY.2013 04:20:08

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

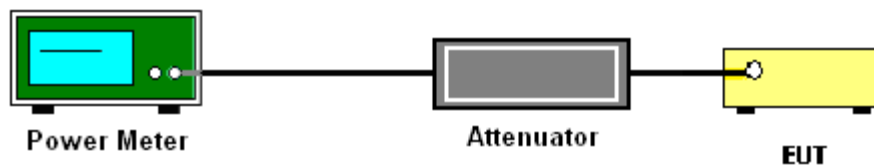



3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	16.38	30	Pass
06	2437	16.50	30	Pass
11	2462	16.74	30	Pass

Test Mode :	802.11g	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	23.21	30	Pass
06	2437	22.97	30	Pass
11	2462	23.28	30	Pass

Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	23.31	30	Pass
06	2437	23.15	30	Pass
11	2462	23.36	30	Pass

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	22.92	30	Pass
06	2437	23.30	30	Pass
09	2452	23.43	30	Pass

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%
Duty Cycle:	100%	Duty Factor:	0dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	12.96
06	2437	13.13
11	2462	13.42

Test Mode :	802.11g	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%
Duty Cycle:	97.21%	Duty Factor:	0.12dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	13.19
06	2437	13.51
11	2462	13.58

Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%
Duty Cycle:	97.31%	Duty Factor:	0.12dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	13.29
06	2437	13.59
11	2462	13.63

Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%
Duty Cycle:	94.77%	Duty Factor:	0.23dB

Channel	Frequency (MHz)	802.11n HT40 Average Output Power (dBm)
03	2422	11.88
06	2437	13.18
09	2452	13.35

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

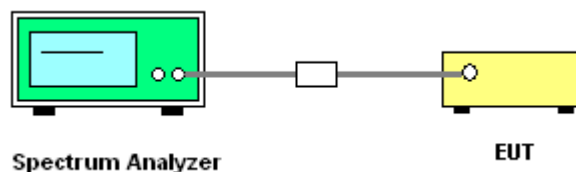

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	3.02	-11.54	8	Pass
06	2437	4.36	-8.44	8	Pass
11	2462	3.91	-9.47	8	Pass

Test Mode :	802.11g	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-0.07	-14.79	8	Pass
06	2437	1.01	-12.72	8	Pass
11	2462	1.21	-12.09	8	Pass



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	0.24	-13.79	8	Pass
06	2437	1.23	-12.15	8	Pass
11	2462	1.28	-11.65	8	Pass

Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n HT40 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
03	2422	-2.44	-17.35	8	Pass
06	2437	-0.65	-15.95	8	Pass
09	2452	-0.40	-15.11	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.




3.3.6 Test Result of Power Spectral Density Plots (100 kHz)

PSD 100kHz Plot on 802.11b Channel 01

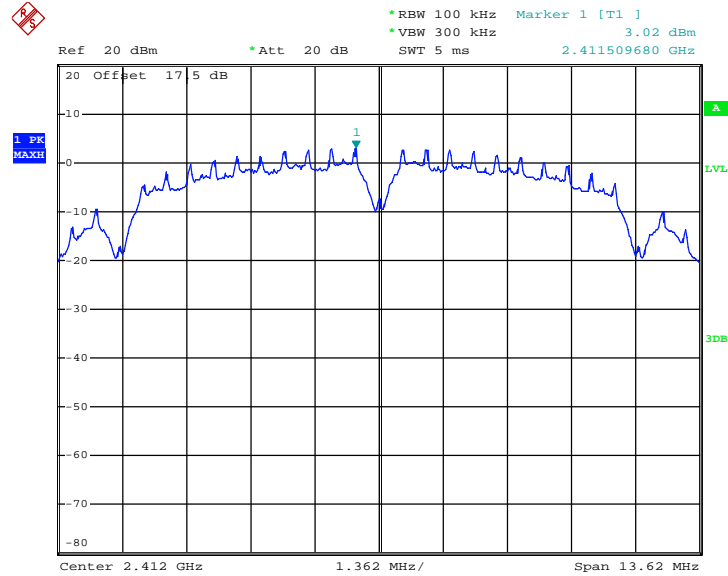

Date: 16.MAY.2013 02:54:07


PSD 100kHz Plot on 802.11b Channel 06

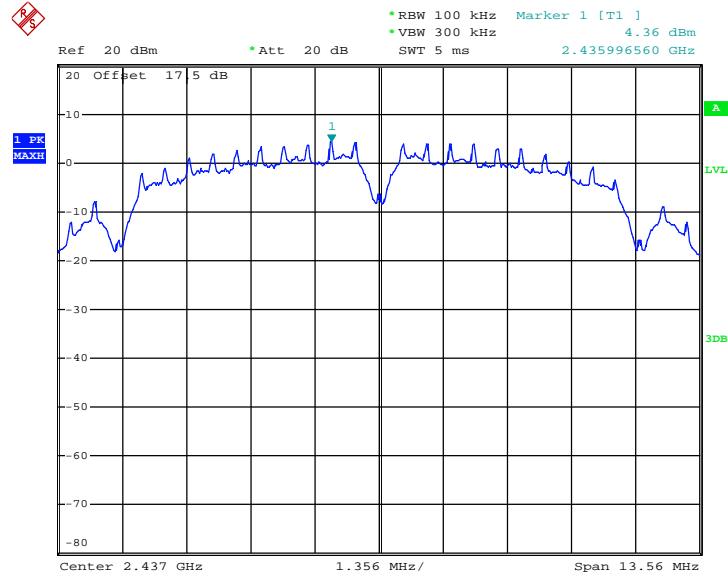

Date: 16.MAY.2013 03:03:55




PSD 100kHz Plot on 802.11b Channel 11

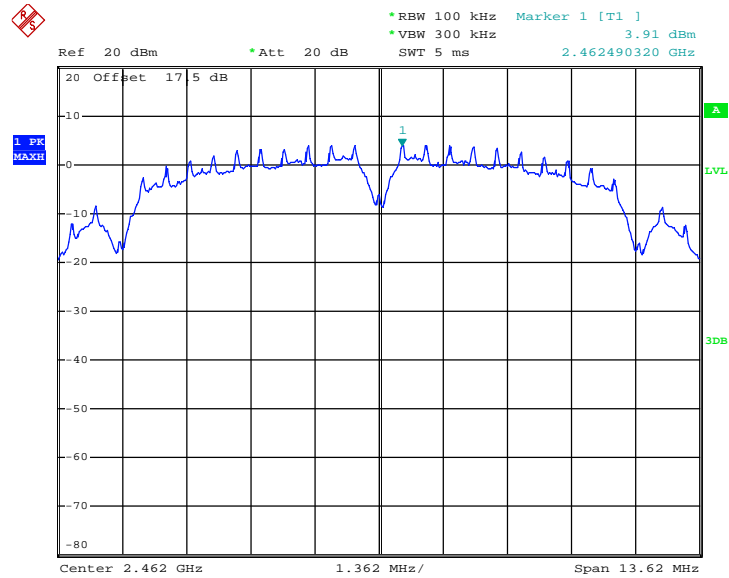

Date: 16.MAY.2013 03:08:03


PSD 100kHz Plot on 802.11g Channel 01

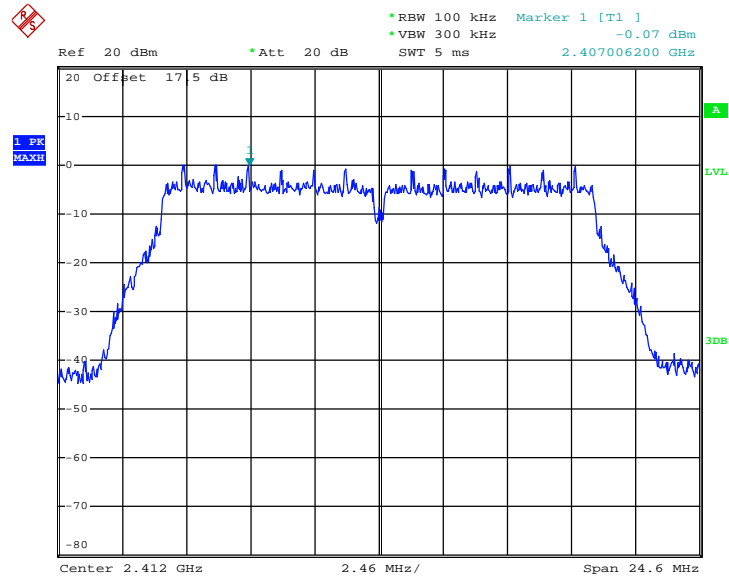

Date: 16.MAY.2013 03:37:27




PSD 100kHz Plot on 802.11g Channel 06

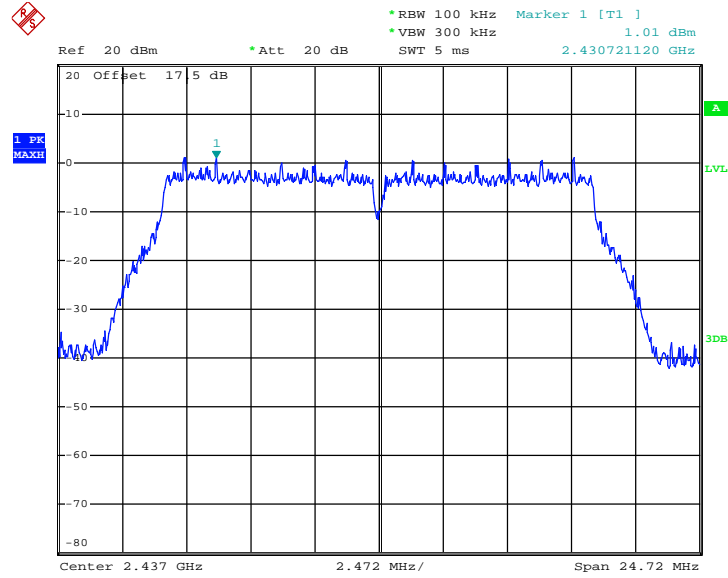

Date: 16.MAY.2013 03:24:41


PSD 100kHz Plot on 802.11g Channel 11

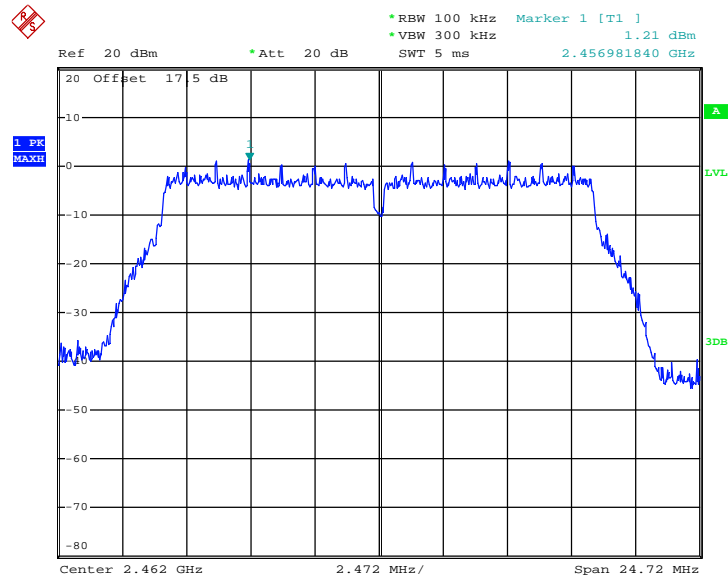

Date: 16.MAY.2013 03:30:22




PSD 100kHz Plot on 802.11n HT20 Channel 01

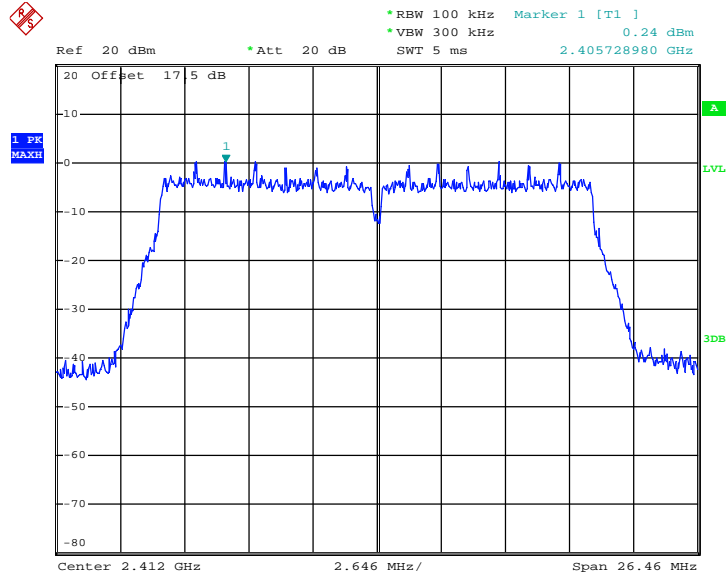

Date: 16.MAY.2013 03:44:02


PSD 100kHz Plot on 802.11n HT20 Channel 06

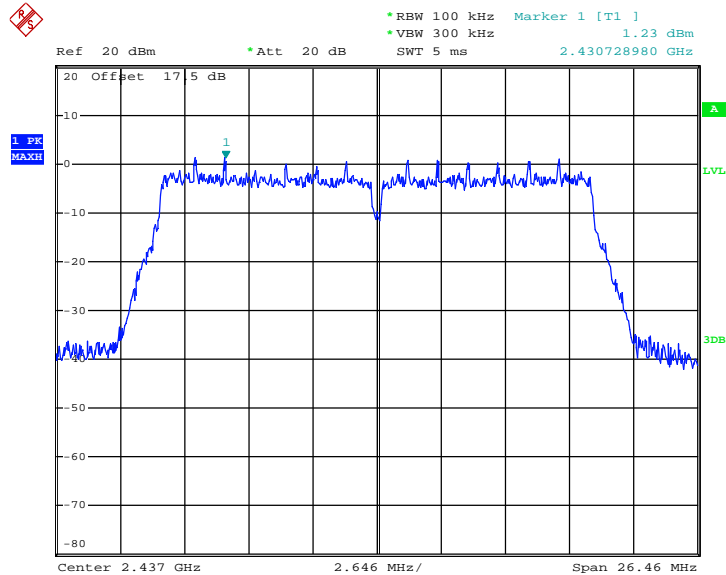

Date: 16.MAY.2013 03:51:30




PSD 100kHz Plot on 802.11n HT20 Channel 11

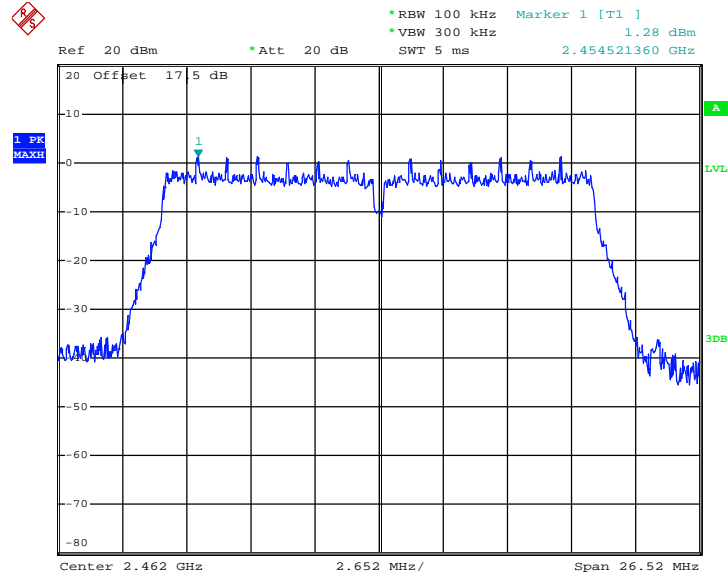

Date: 16.MAY.2013 03:56:32


PSD 100kHz Plot on 802.11n HT40 Channel 03

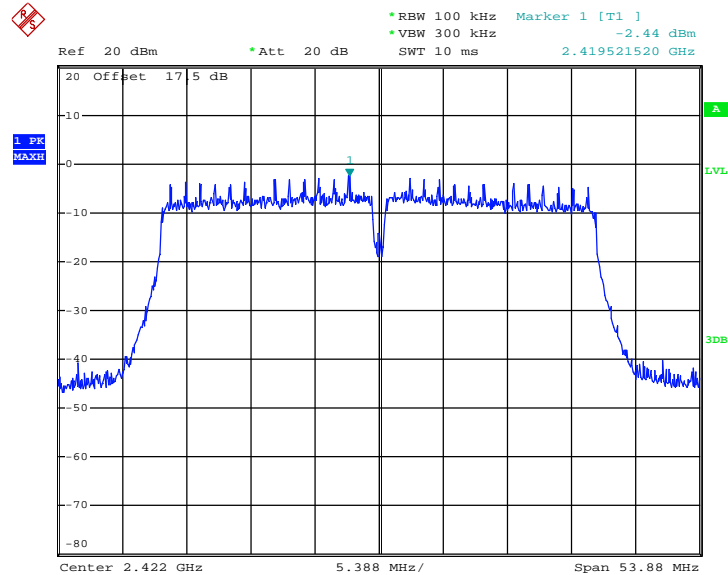

Date: 16.MAY.2013 04:08:00




PSD 100kHz Plot on 802.11n HT40 Channel 06

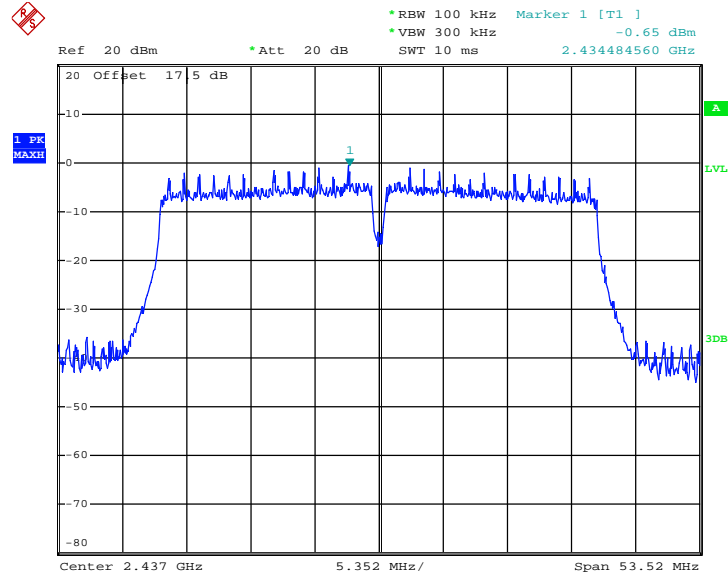

Date: 16.MAY.2013 04:14:42

PSD 100kHz Plot on 802.11n HT40 Channel 09

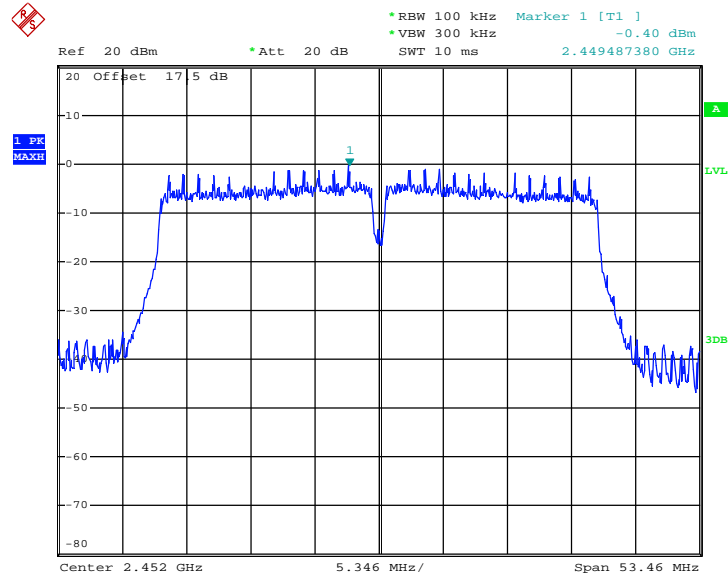


Date: 16.MAY.2013 04:20:57




3.3.7 Test Result of Power Spectral Density Plots (3 kHz)

PSD 3kHz Plot on 802.11b Channel 01

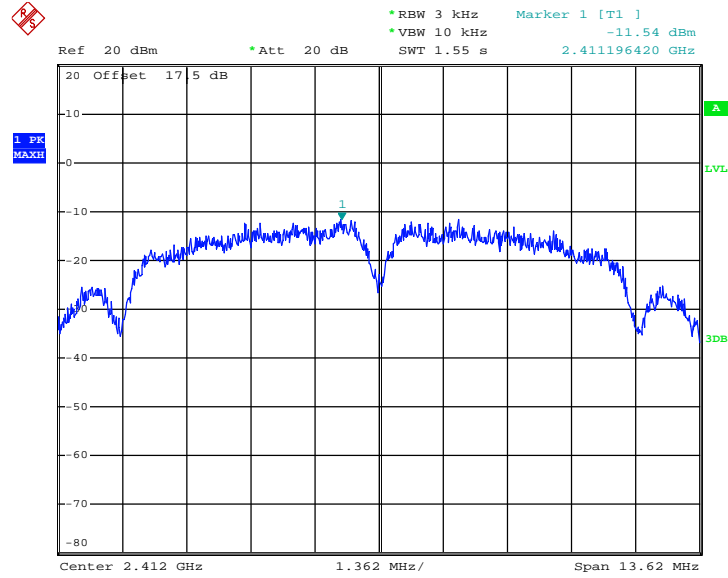

Date: 16.MAY.2013 02:53:45


PSD 3kHz Plot on 802.11b Channel 06

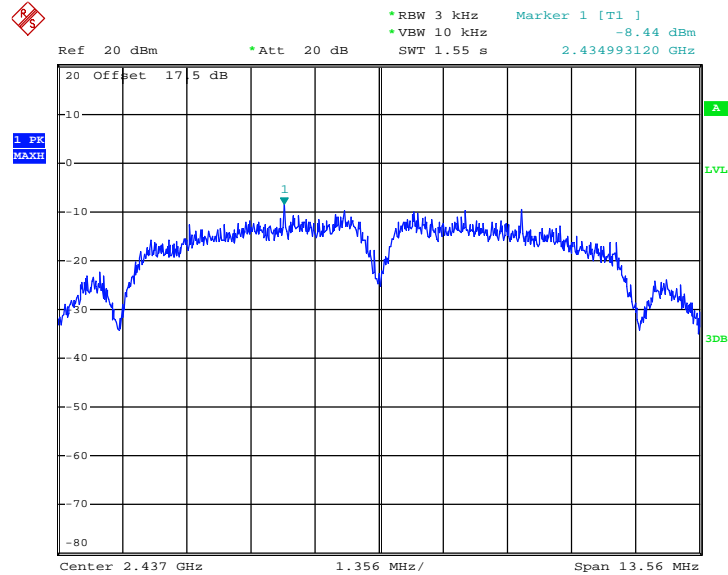

Date: 16.MAY.2013 03:03:40




PSD 3kHz Plot on 802.11b Channel 11

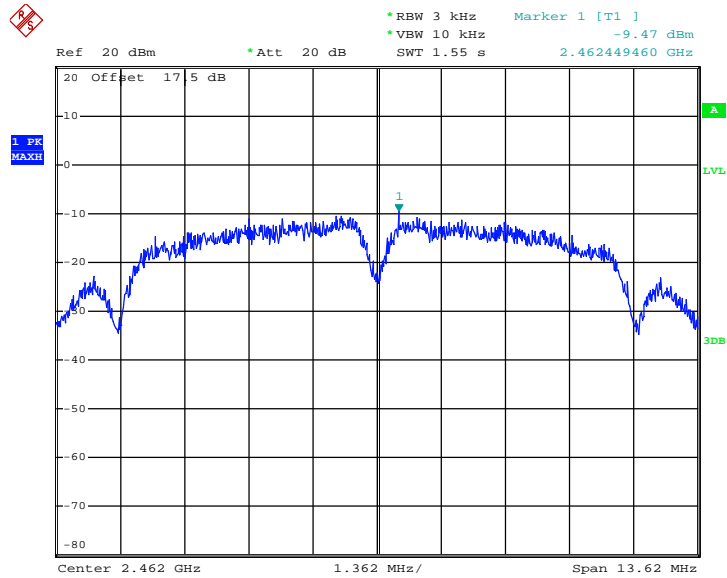

Date: 16.MAY.2013 03:07:39


PSD 3kHz Plot on 802.11g Channel 01

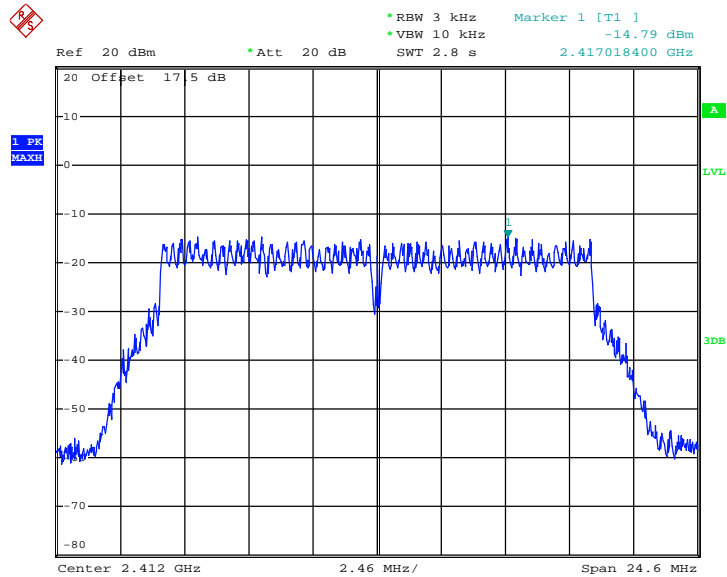

Date: 16.MAY.2013 03:37:03




PSD 3kHz Plot on 802.11g Channel 06

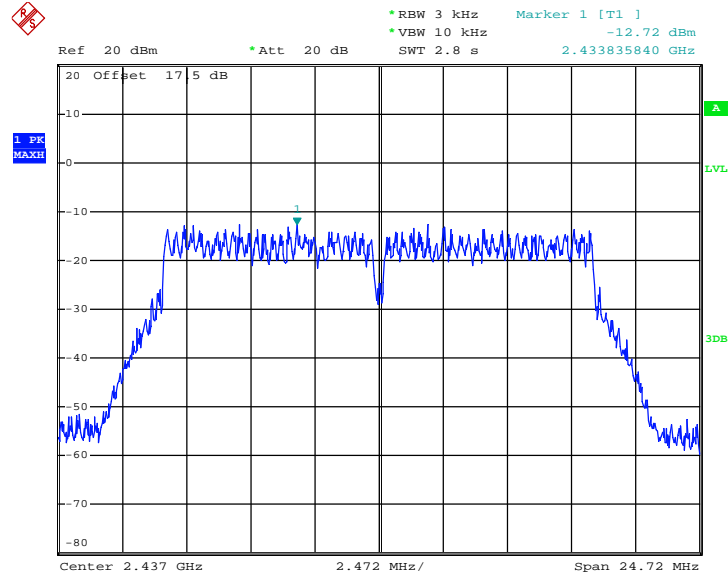

Date: 16.MAY.2013 03:24:24


PSD 3kHz Plot on 802.11g Channel 11

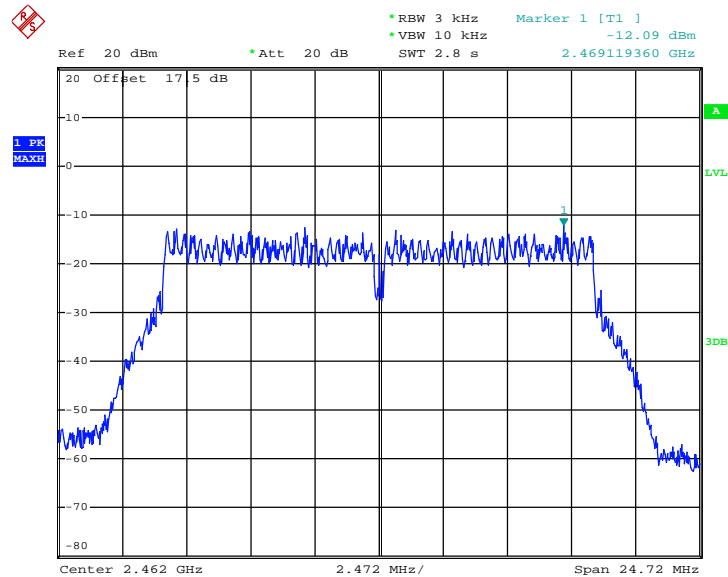

Date: 16.MAY.2013 03:30:09




PSD 3kHz Plot on 802.11n HT20 Channel 01

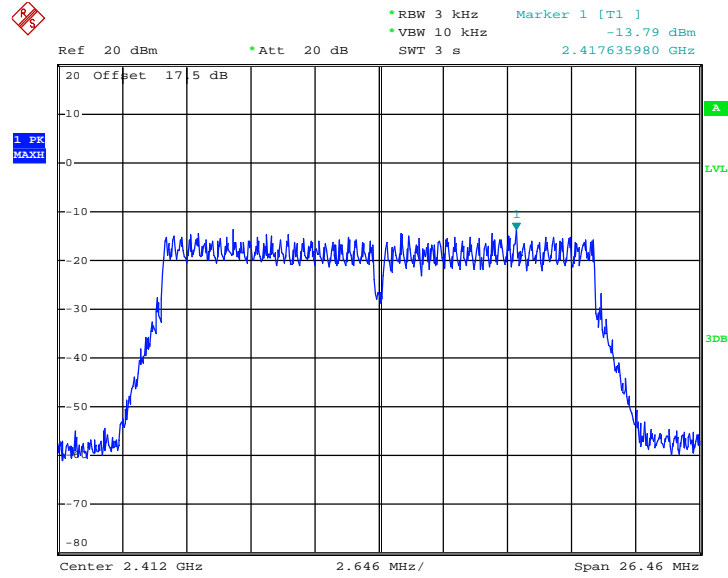

Date: 16.MAY.2013 03:43:34


PSD 3kHz Plot on 802.11n HT20 Channel 06

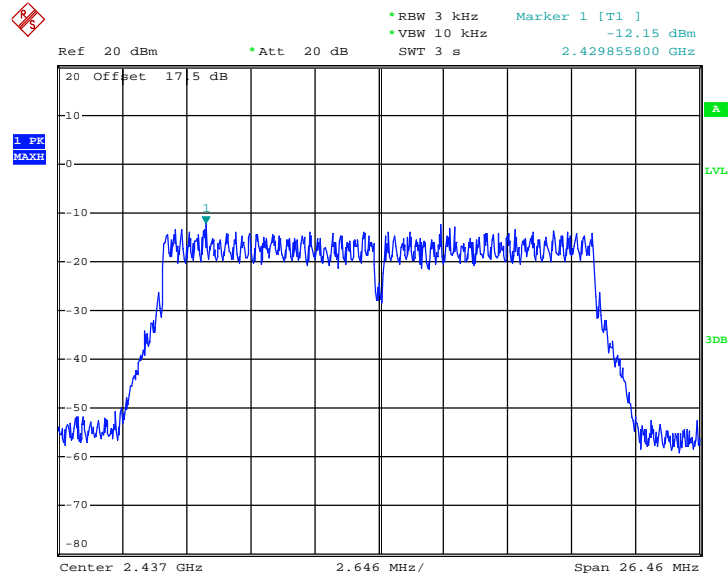

Date: 16.MAY.2013 03:51:10




PSD 3kHz Plot on 802.11n HT20 Channel 11

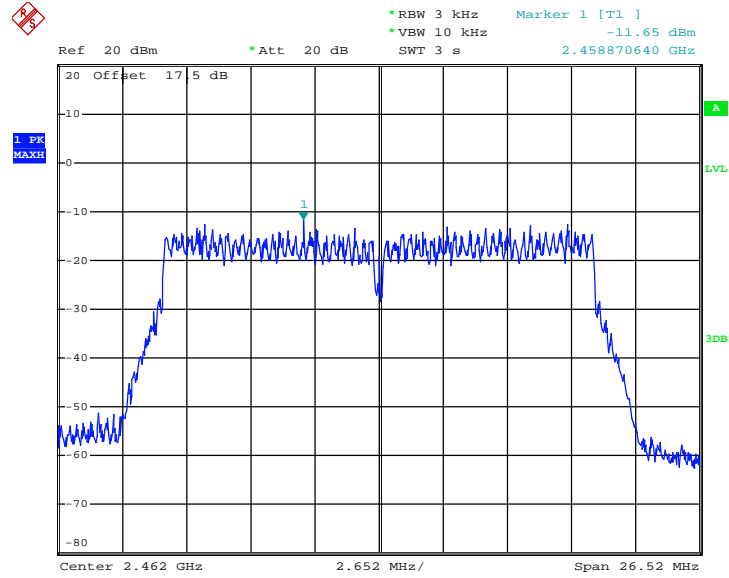

Date: 16.MAY.2013 03:56:17


PSD 3kHz Plot on 802.11n HT40 Channel 03

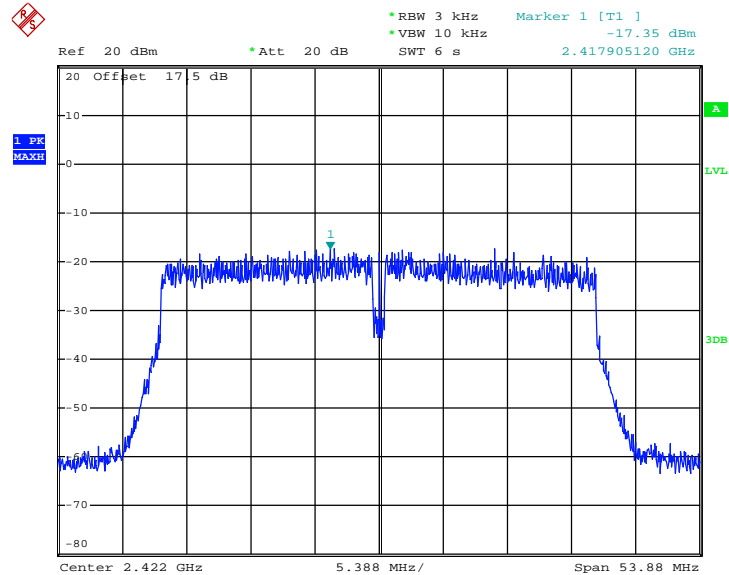

Date: 16.MAY.2013 04:07:43




PSD 3kHz Plot on 802.11n HT40 Channel 06

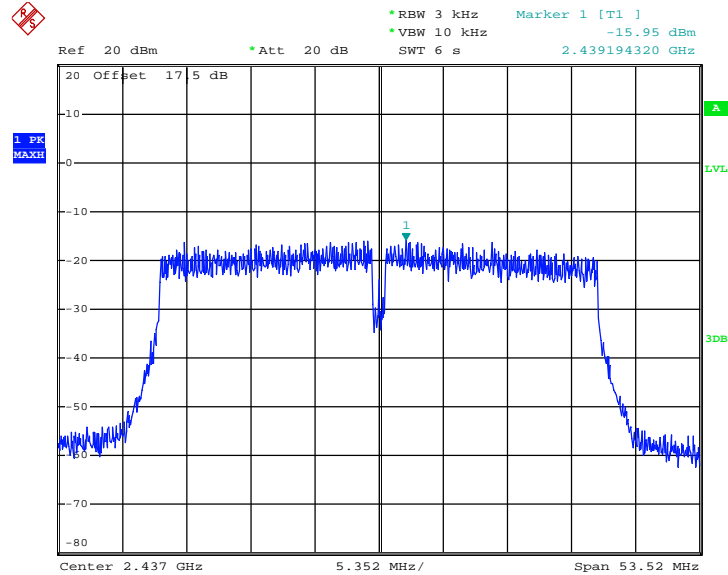

Date: 16.MAY.2013 04:14:28

PSD 3kHz Plot on 802.11n HT40 Channel 09

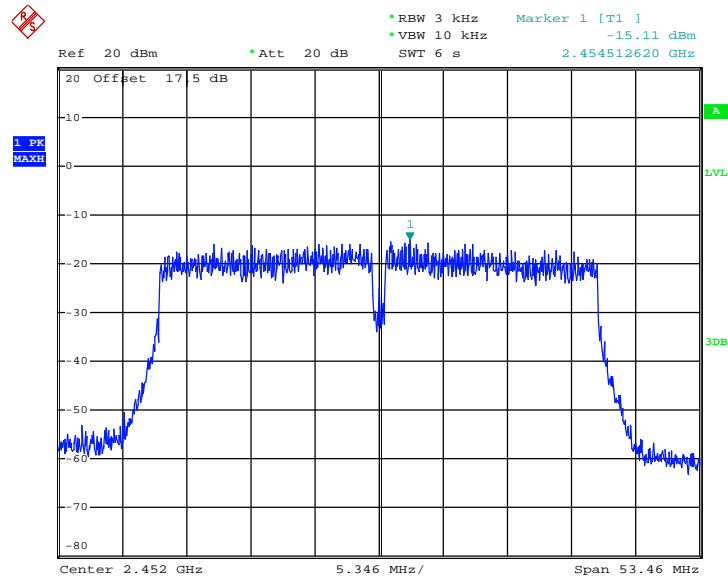

Date: 16.MAY.2013 04:20:40

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.

3.4.4 Test Setup

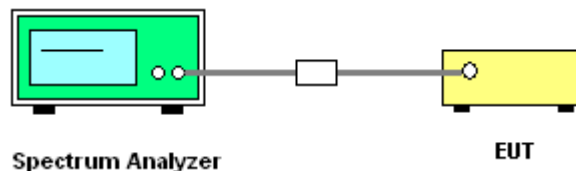




3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Liang

Low Band Edge Plot on 802.11b Channel 01

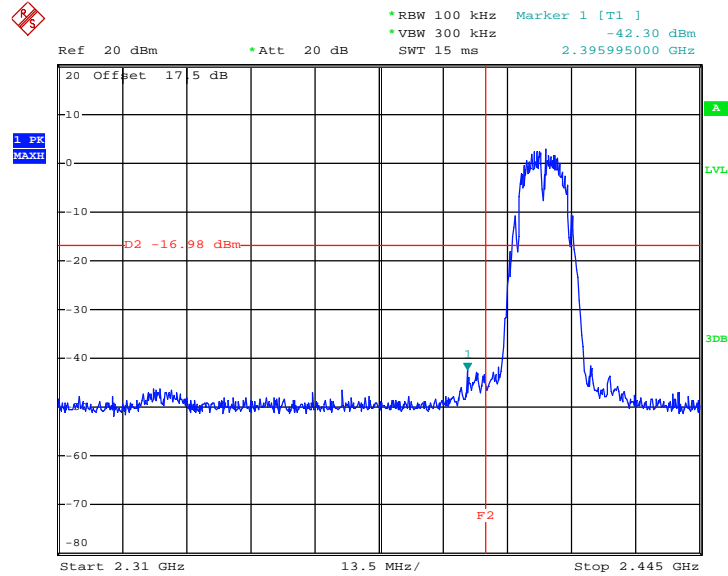

Date: 16.MAY.2013 02:54:28

High Band Edge Plot on 802.11b Channel 11

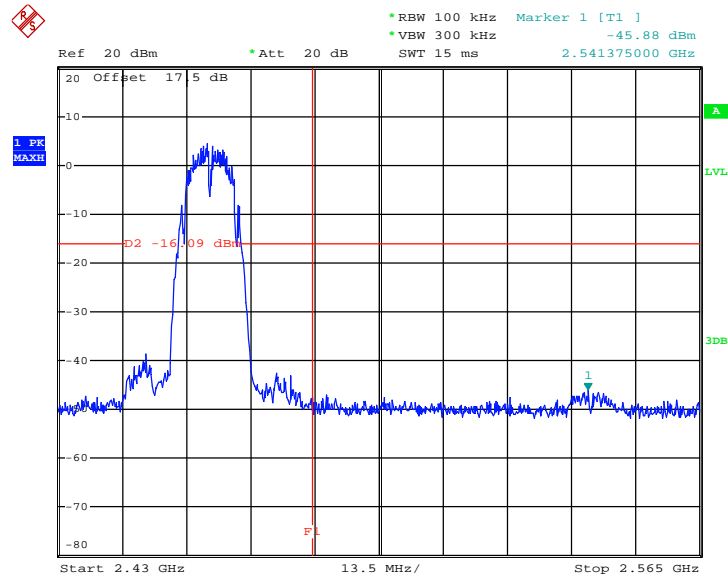


Date: 16.MAY.2013 03:08:25




Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Liang

Low Band Edge Plot on 802.11g Channel 01

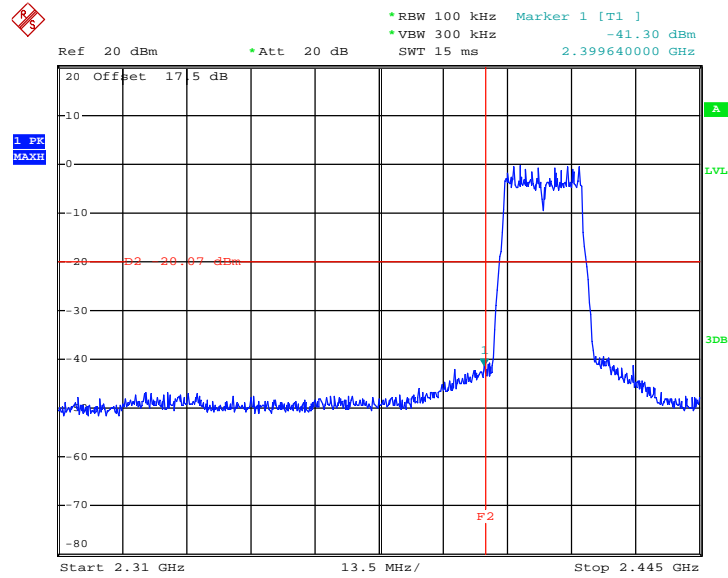

Date: 16.MAY.2013 03:37:54

High Band Edge Plot on 802.11g Channel 11

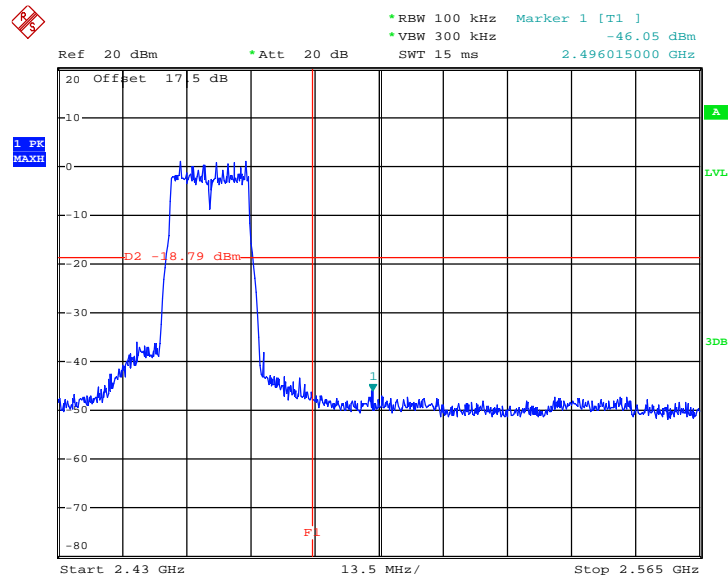


Date: 16.MAY.2013 03:30:40




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Fly Liang

Low Band Edge Plot on 802.11n HT20 Channel 01

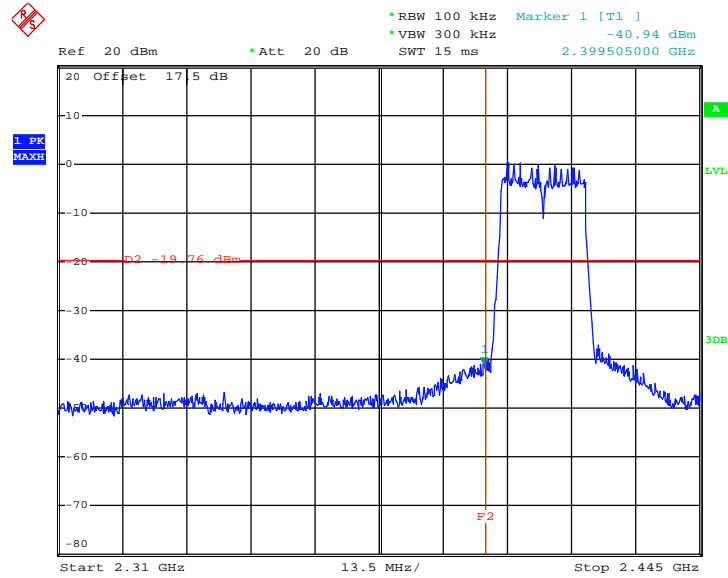

Date: 16.MAY.2013 03:44:24

High Band Edge Plot on 802.11n HT20 Channel 11

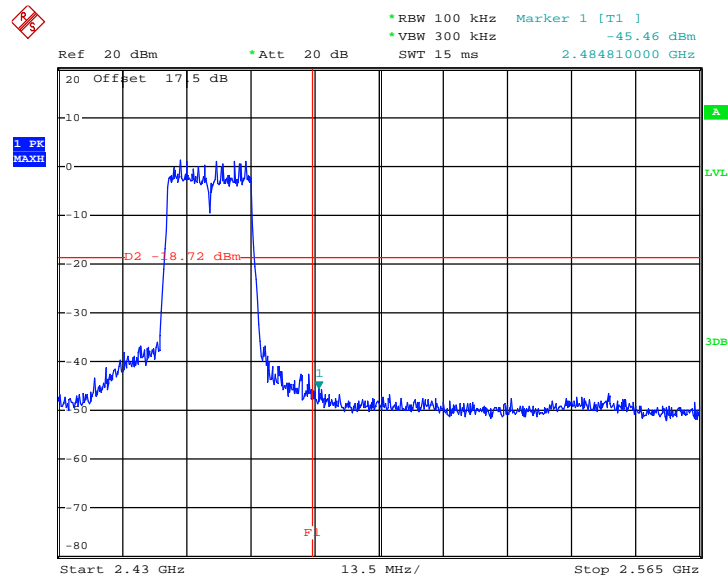


Date: 16.MAY.2013 03:57:03




Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	03 and 09	Test Engineer :	Fly Liang

Low Band Edge Plot on 802.11n HT40 Channel 03

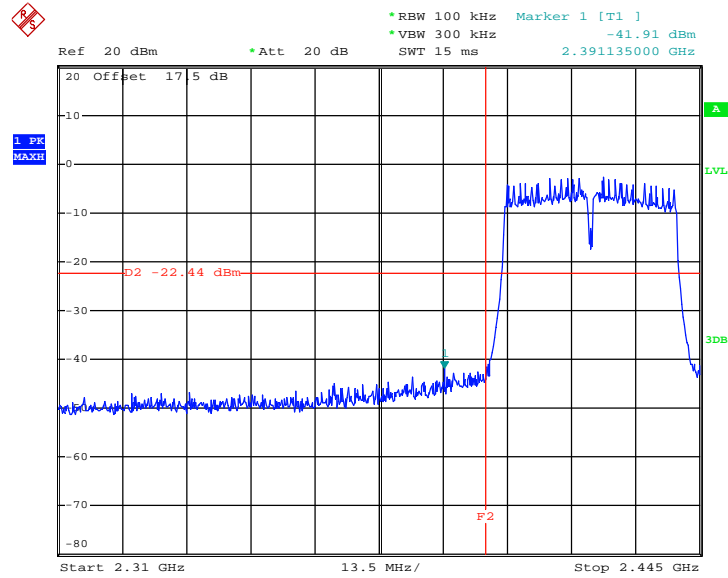

Date: 16.MAY.2013 04:08:34

High Band Edge Plot on 802.11n HT40 Channel 09

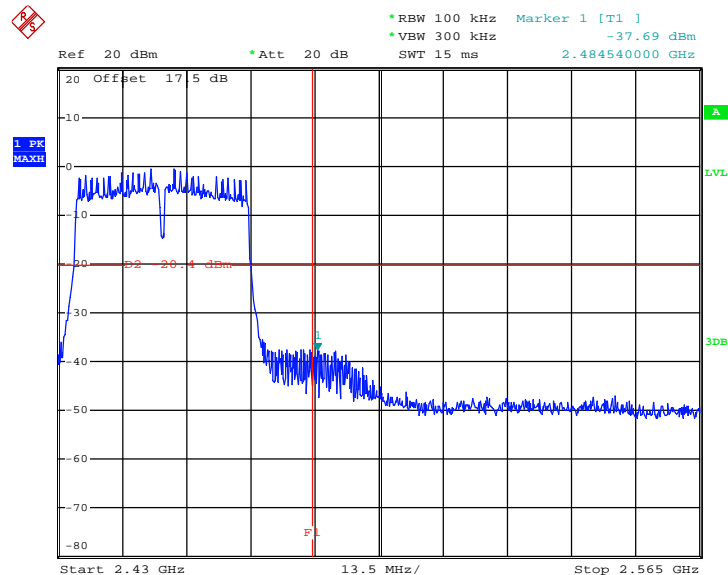


Date: 16.MAY.2013 04:21:52

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Liang

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

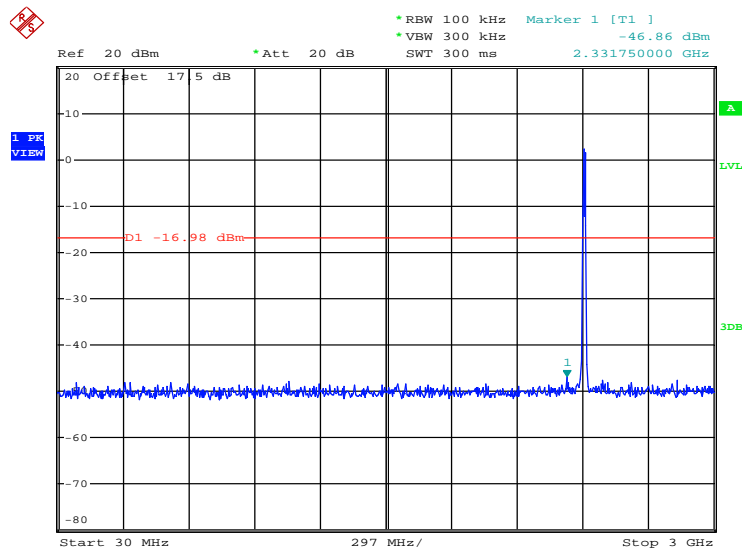

Date: 16.MAY.2013 02:55:01

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

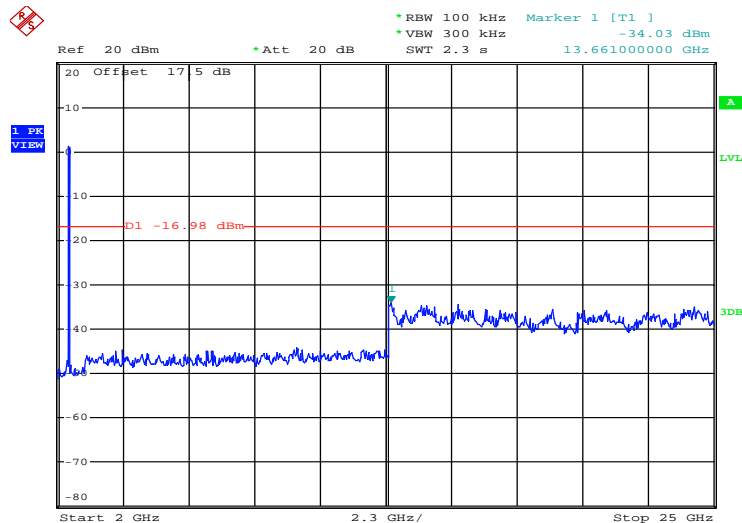

Date: 16.MAY.2013 02:55:19

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

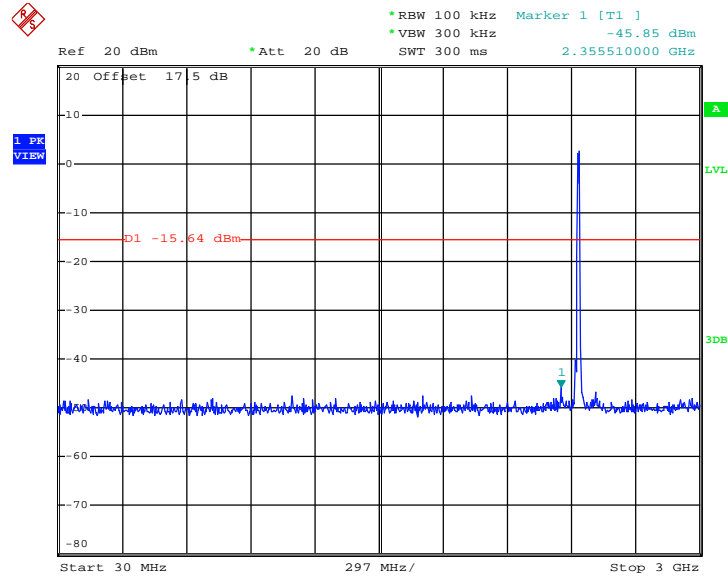

Date: 16.MAY.2013 03:04:22

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 06

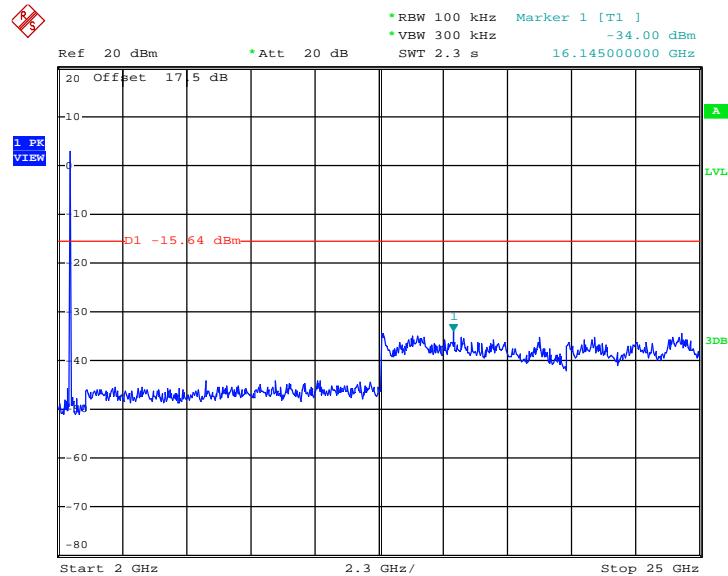

Date: 16.MAY.2013 03:04:40

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

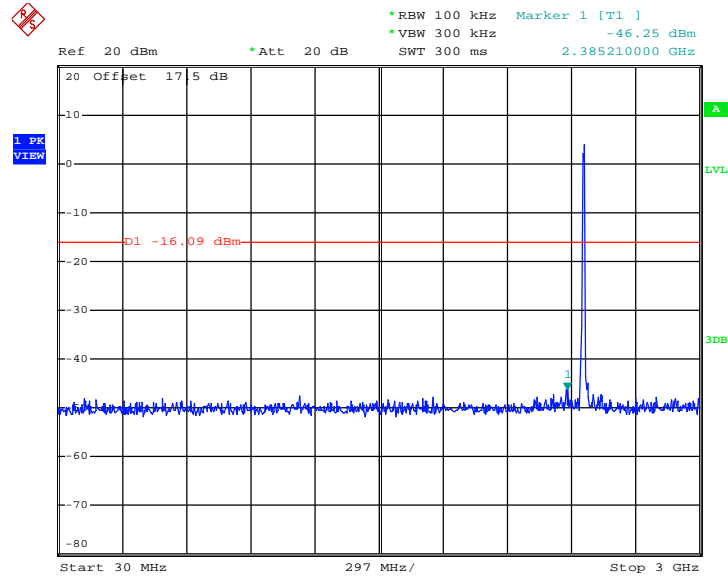

Date: 16.MAY.2013 03:09:14

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

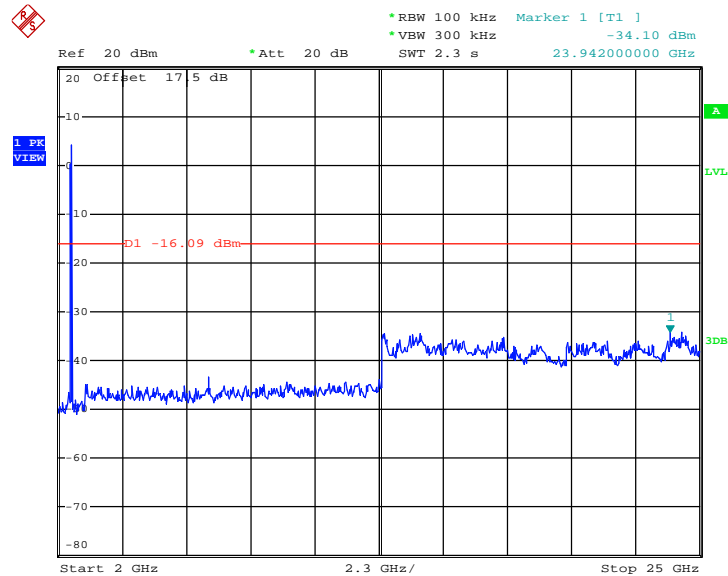


Date: 16.MAY.2013 03:09:32



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Liang

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

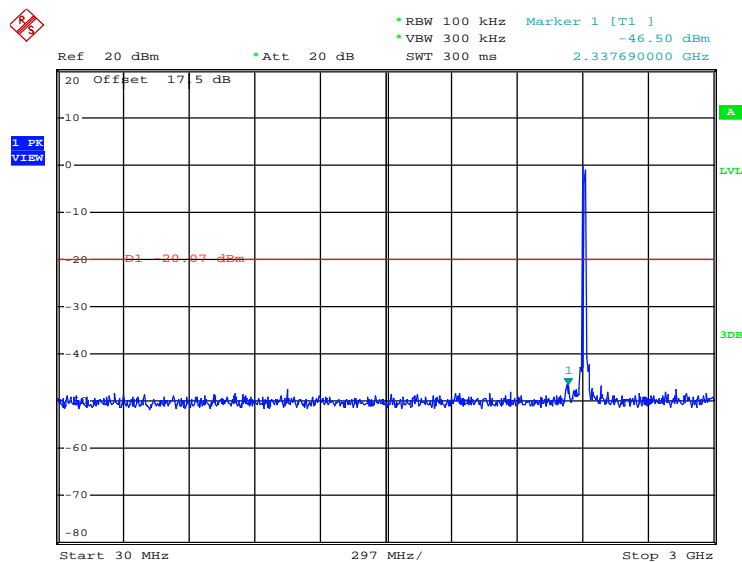

Date: 16.MAY.2013 03:38:19

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

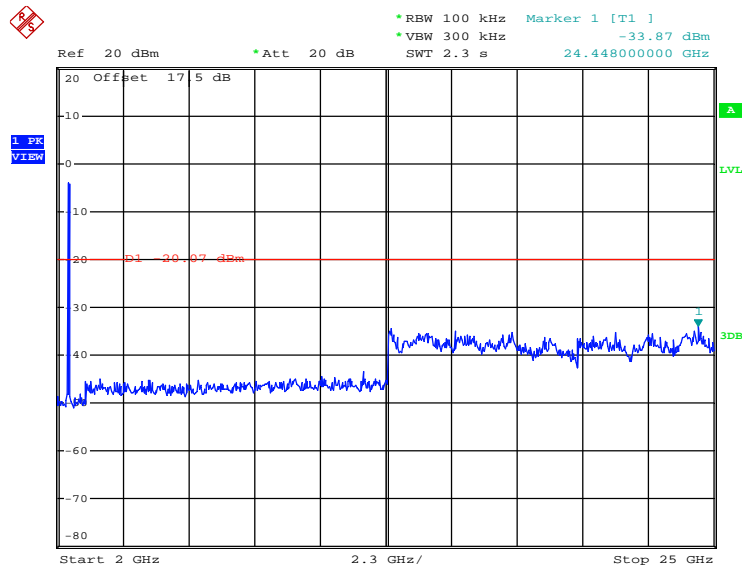


Date: 16.MAY.2013 03:38:37



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

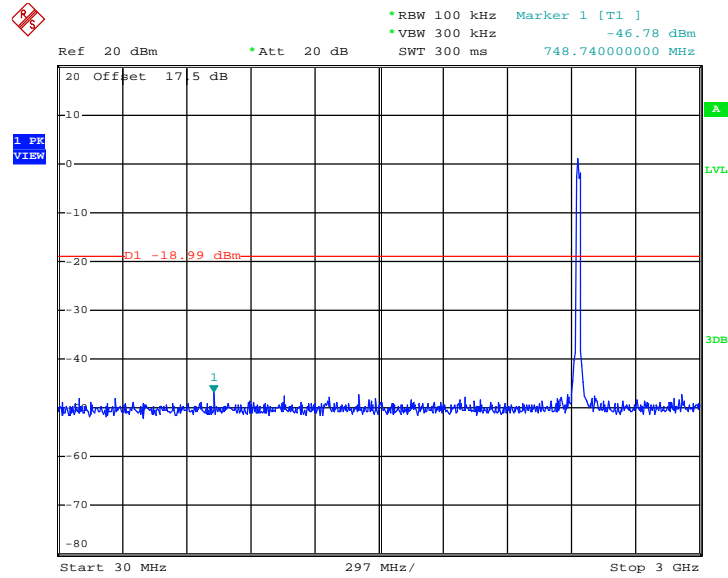

Date: 16.MAY.2013 03:25:14

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

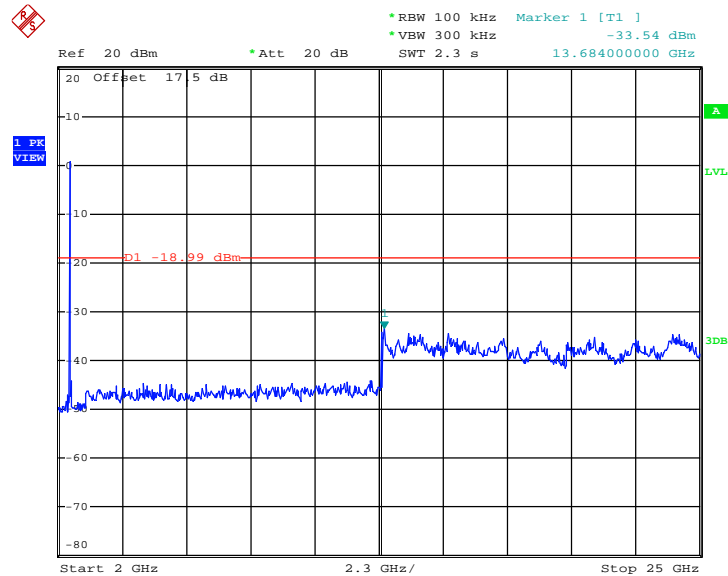


Date: 16.MAY.2013 03:25:32



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

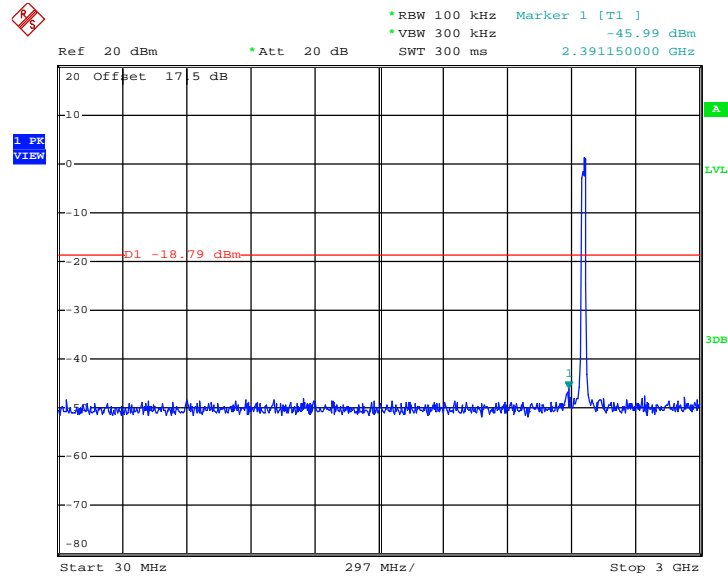

Date: 16.MAY.2013 03:31:09

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

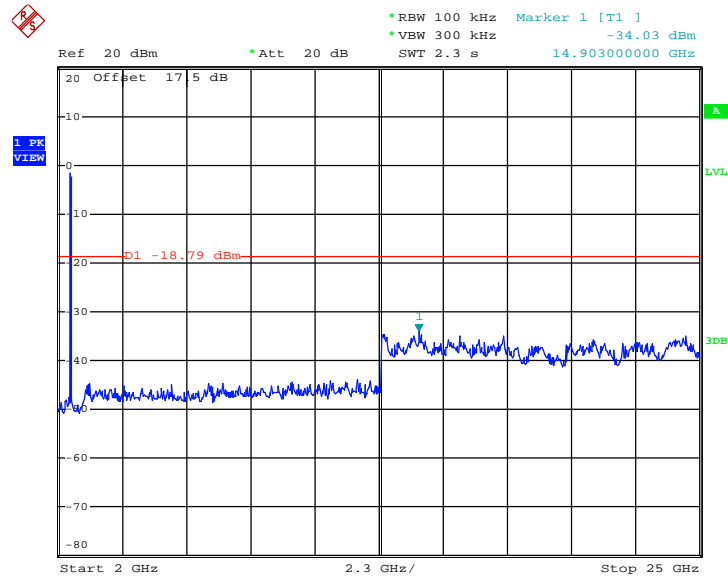


Date: 16.MAY.2013 03:31:27



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Fly Liang

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

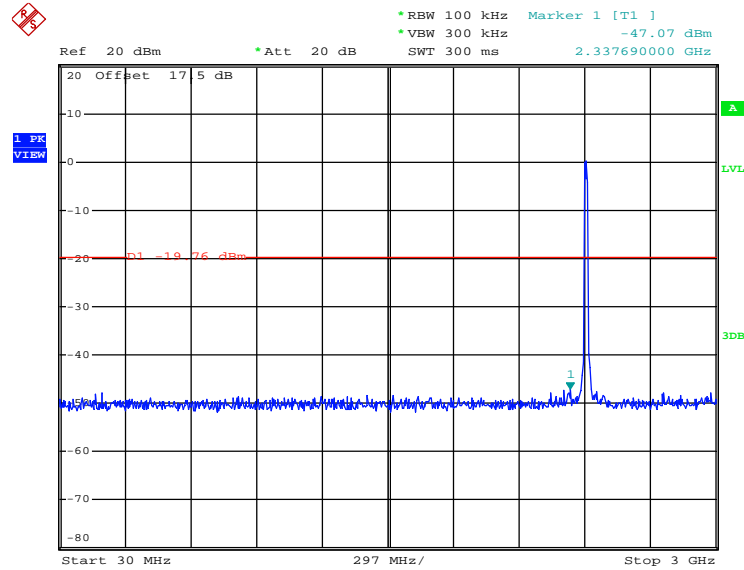

Date: 16.MAY.2013 03:44:53

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

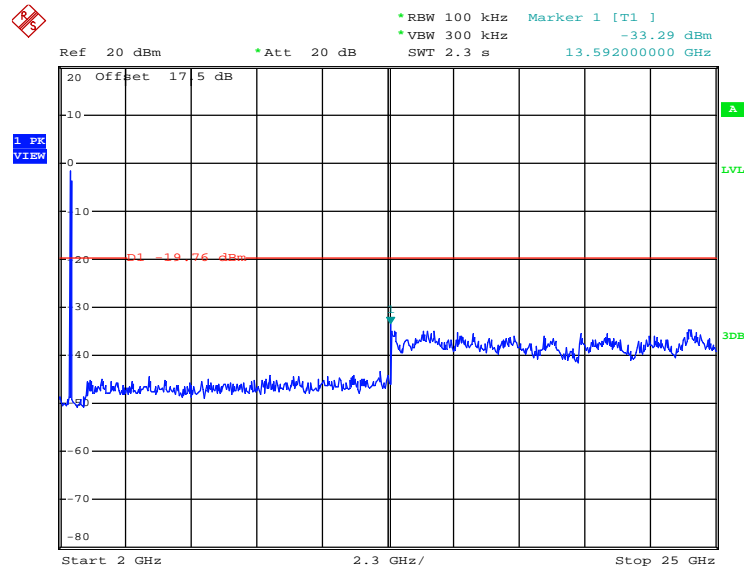


Date: 16.MAY.2013 03:45:12



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

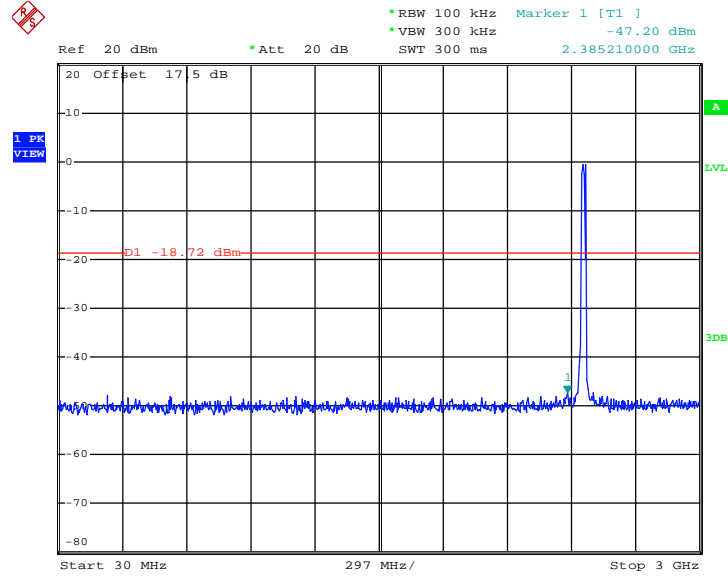

Date: 16.MAY.2013 04:00:06

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

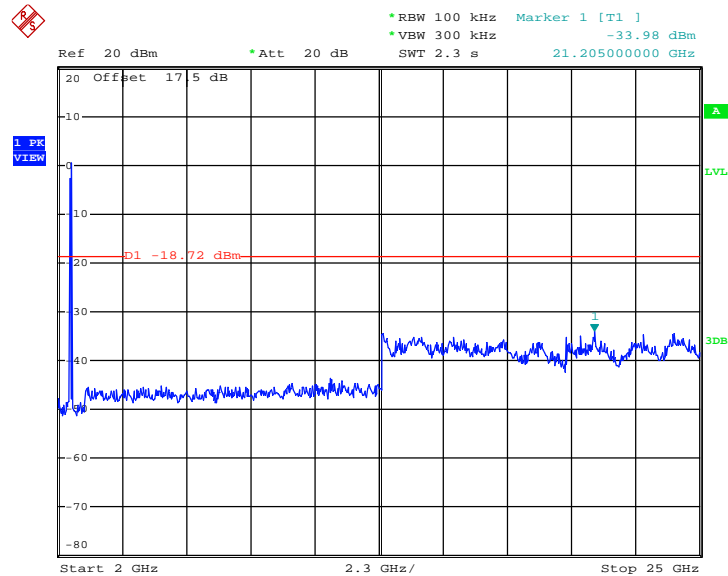


Date: 16.MAY.2013 04:00:25



Test Mode :	802.11n HT40	Temperature :	24~26
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53
Test Channel :	03, 06, 09	Test Engineer :	Fly Liang

802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 03

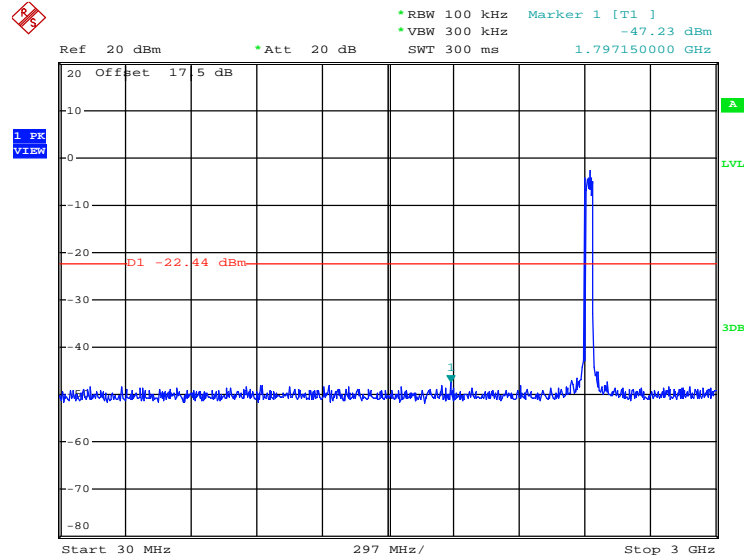

Date: 16.MAY.2013 04:09:03

802.11n HT40 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 03

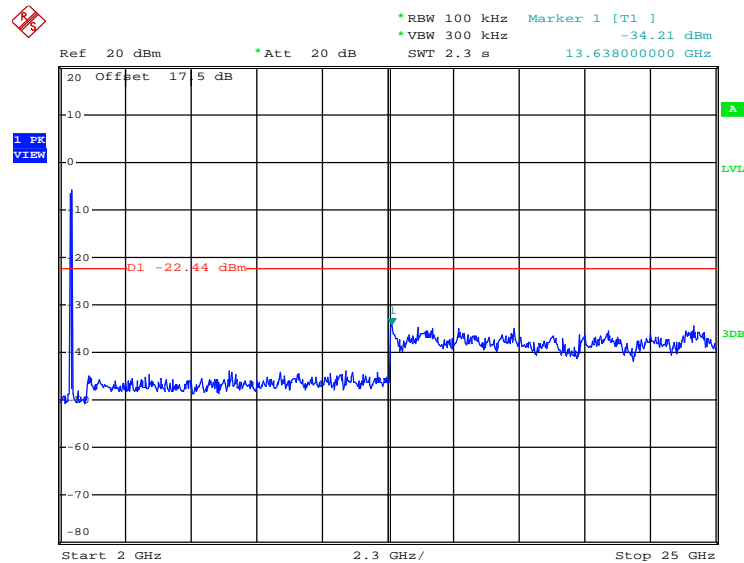

Date: 16.MAY.2013 04:09:21

802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

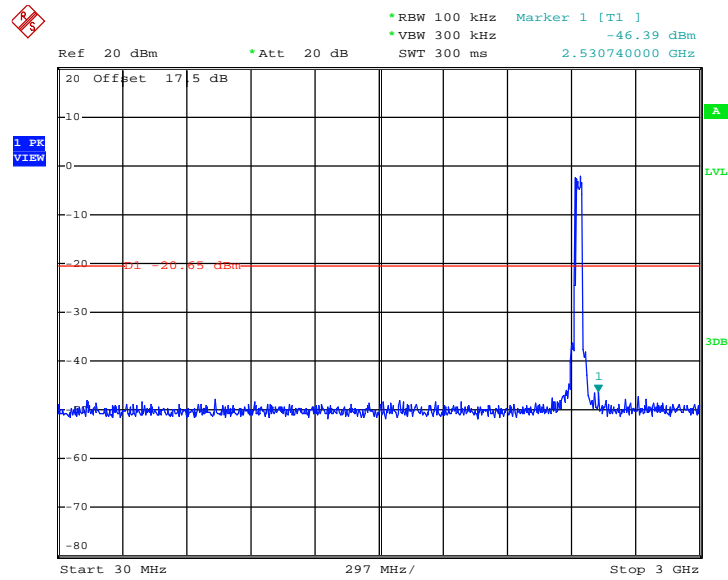

Date: 16.MAY.2013 04:15:14

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

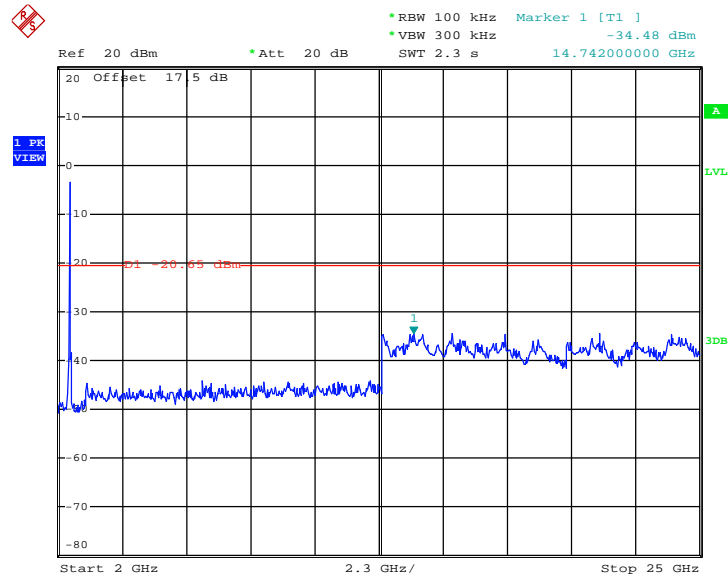


Date: 16.MAY.2013 04:15:32



802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 09

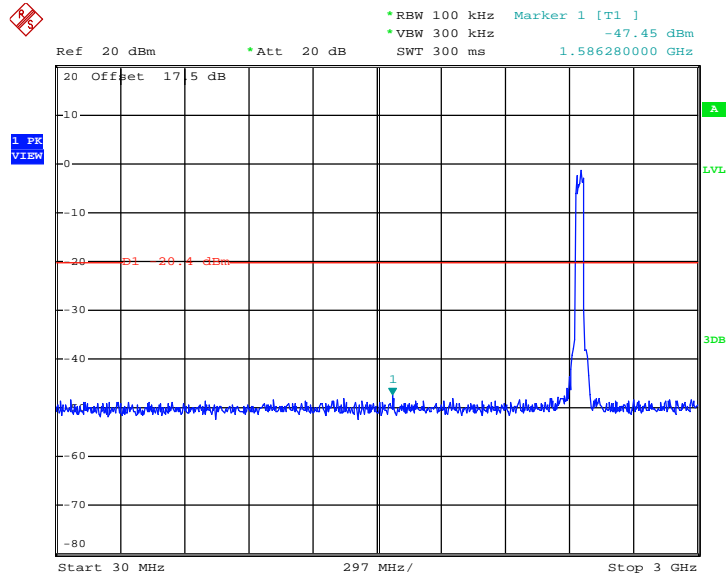

Date: 16.MAY.2013 04:22:27

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 09

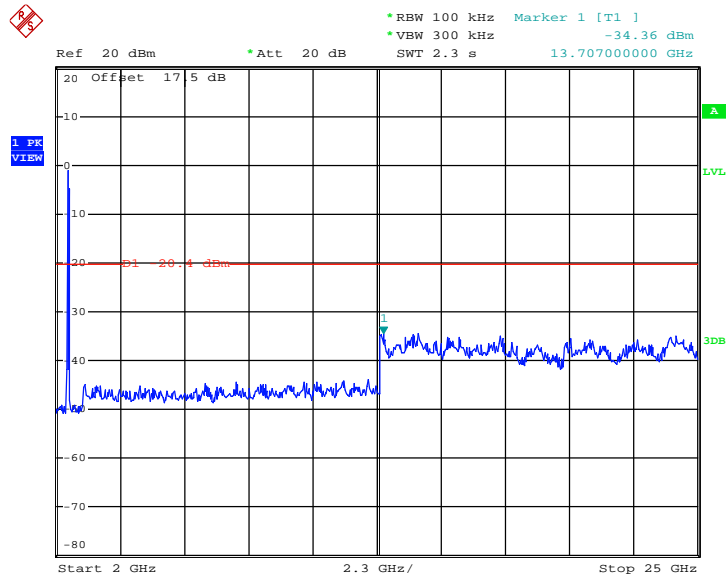

Date: 16.MAY.2013 04:22:46

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100.00	-	-	10Hz
802.11g	97.21	1.39	0.72	1kHz
2.4G 802.11n HT20	97.31	1.31	0.76	1kHz
2.4G 802.11n HT40	94.77	0.65	1.53	3kHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

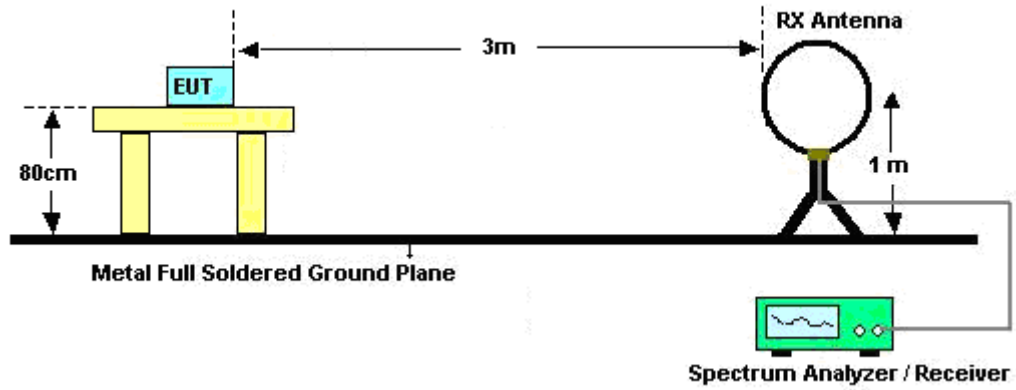

For radiated emissions from 30MHz to 1GHz

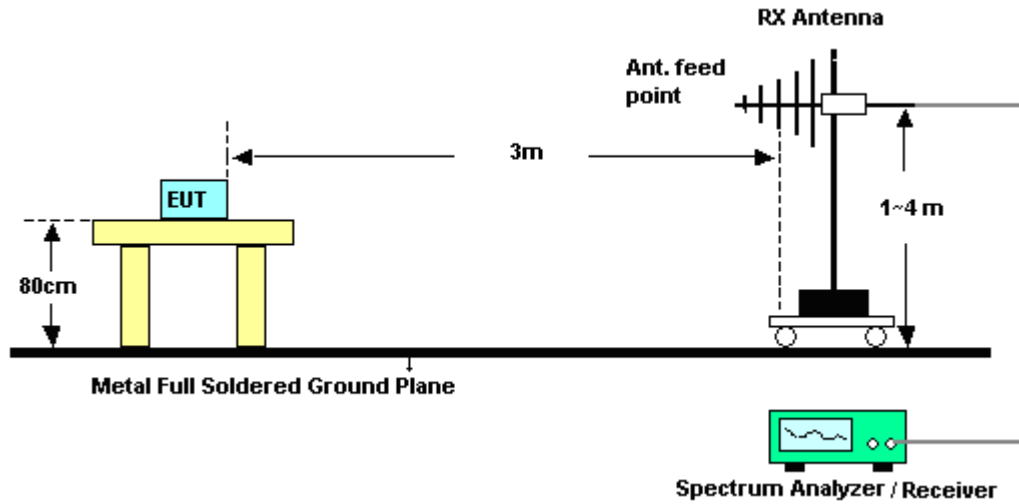

For radiated emissions above 1GHz

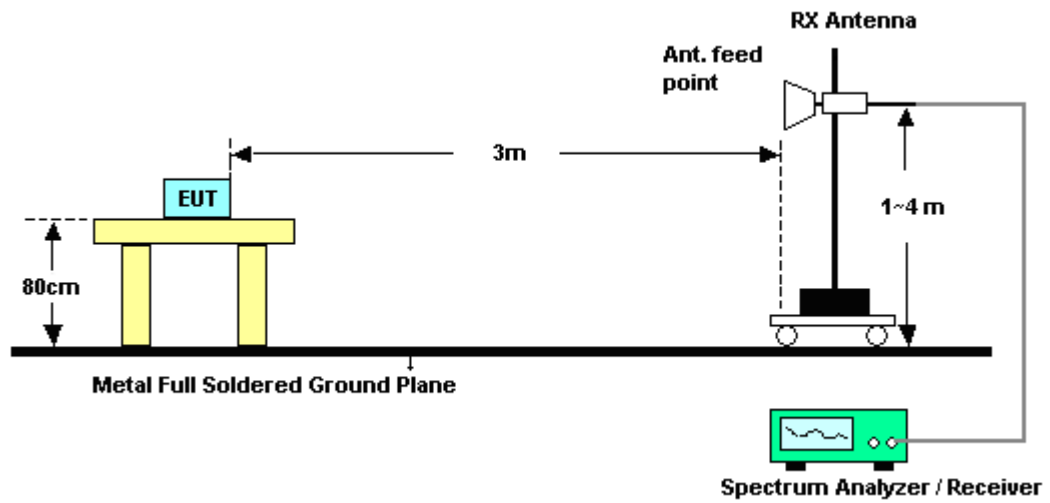

3.5.5 Test Results of Radiated Spurious Emission (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	49~50%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2332.5	55.36	-18.64	74	49.87	32.05	4.34	30.9	100	309	Peak
2331.42	43.33	-10.67	54	37.84	32.05	4.34	30.9	100	309	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2328.27	53.86	-20.14	74	48.37	32.05	4.34	30.9	132	13	Peak
2331.42	41.63	-12.37	54	36.14	32.05	4.34	30.9	132	13	Average

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	49~50%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2495.86	54.48	-19.52	74	48.47	32.29	4.49	30.77	100	308	Peak
2483.5	42.06	-11.94	54	36.1	32.27	4.47	30.78	100	308	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2499.52	54.66	-19.34	74	48.65	32.29	4.49	30.77	104	281	Peak
2483.5	41.23	-12.77	54	35.27	32.27	4.47	30.78	104	281	Average



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	49~50%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.93	60.55	-13.45	74	54.85	32.14	4.42	30.86	100	316	Peak
2390	47.06	-6.94	54	41.36	32.14	4.42	30.86	100	316	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	61.46	-12.54	74	55.76	32.14	4.42	30.86	106	274	Peak
2389.74	46.09	-7.91	54	40.39	32.14	4.42	30.86	106	274	Average

Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	49~50%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.33	52.8	-21.2	74	46.84	32.27	4.47	30.78	193	42	Peak
2483.53	40.49	-13.51	54	34.53	32.27	4.47	30.78	193	42	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.77	53.44	-20.56	74	47.48	32.27	4.47	30.78	121	106	Peak
2483.53	41.04	-12.96	54	35.08	32.27	4.47	30.78	121	106	Average



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	49~50%
Test Channel :	01	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.21	65.48	-8.52	74	59.78	32.14	4.42	30.86	106	38	Peak
2390	44.64	-9.36	54	38.94	32.14	4.42	30.86	106	38	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	61.84	-12.16	74	56.14	32.14	4.42	30.86	100	111	Peak
2390	45.29	-8.71	54	39.59	32.14	4.42	30.86	100	111	Average

Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	49~50%
Test Channel :	11	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.16	67.99	-6.01	74	62.03	32.27	4.47	30.78	108	331	Peak
2483.5	47.06	-6.94	54	41.1	32.27	4.47	30.78	108	331	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.83	66.37	-7.63	74	60.41	32.27	4.47	30.78	121	116	Peak
2483.5	46.48	-7.52	54	40.52	32.27	4.47	30.78	121	116	Average



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	49~50%
Test Channel :	03	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.4	58.62	-15.38	74	52.92	32.14	4.42	30.86	122	314	Peak
2389.29	43.66	-10.34	54	37.96	32.14	4.42	30.86	122	314	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	55.66	-18.34	74	49.96	32.14	4.42	30.86	100	277	Peak
2379.57	41.18	-12.82	54	35.5	32.12	4.42	30.86	100	277	Average

Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	49~50%
Test Channel :	09	Test Engineer :	Robin Luo

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.4	57.15	-16.85	74	51.19	32.27	4.47	30.78	162	133	Peak
2483.83	42.01	-11.99	54	36.05	32.27	4.47	30.78	162	133	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.7	57.82	-16.18	74	51.86	32.27	4.47	30.78	100	106	Peak
2484.37	43.12	-10.88	54	37.16	32.27	4.47	30.78	100	106	Average

3.5.7 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Note: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2412 MHz is fundamental signal which can be ignored. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 104.7 dBuV/m - 20dB = 84.7 dBuV/m. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	60.31	-24.39	84.7	54.6	32.14	4.42	30.85	100	309	Peak
2412	104.7	-	-	98.92	32.17	4.44	30.83	100	309	Peak
2412	95.39	-	-	89.61	32.17	4.44	30.83	100	309	Average
4824	46.43	-27.57	74	34.86	33.68	5.95	28.06	100	360	Peak
7236	49.61	-35.09	84.7	34.88	35.29	7.58	28.14	100	65	Peak



Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	61.91	-20.4	82.31	56.2	32.14	4.42	30.85	131	13	Peak
2412	102.31	-	-	96.53	32.17	4.44	30.83	131	13	Peak
2412	92.23	-	-	86.45	32.17	4.44	30.83	131	13	Average
4824	46.11	-27.89	74	34.54	33.68	5.95	28.06	136	227	Peak
7236	51.31	-31	82.31	36.58	35.29	7.58	28.14	100	336	Peak



Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	105.58	-	-	99.73	32.22	4.45	30.82	100	320	Peak
2437	96.04	-	-	90.19	32.22	4.45	30.82	100	320	Average
4874	46.71	-27.29	74	34.69	33.8	6.02	27.8	100	225	Peak
7311	49.66	-24.34	74	34.58	35.31	7.8	28.03	100	96	Peak



Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.28	-	-	98.43	32.22	4.45	30.82	108	278	Peak
2437	96.43	-	-	90.58	32.22	4.45	30.82	108	278	Average
4874	47.14	-26.86	74	35.12	33.8	6.02	27.8	100	102	Peak
7311	50.07	-23.93	74	34.99	35.31	7.8	28.03	200	112	Peak



Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	105.43	-	-	99.52	32.24	4.47	30.8	100	308	Peak
2462	95.39	-	-	89.48	32.24	4.47	30.8	100	308	Average
4924	47.58	-26.42	74	35.18	33.92	6.1	27.62	100	112	Peak
7386	50.49	-23.51	74	34.93	35.35	8.12	27.91	100	360	Peak



Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	103.49	-	-	97.58	32.24	4.47	30.8	104	281	Peak
2462	93.92	-	-	88.01	32.24	4.47	30.8	104	281	Average
4924	47.14	-26.86	74	34.74	33.92	6.1	27.62	100	228	Peak
7386	50.13	-23.87	74	34.57	35.35	8.12	27.91	110	224	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	65.7	-20.58	86.28	59.99	32.14	4.42	30.85	100	316	Peak
2412	106.28	-	-	100.5	32.17	4.44	30.83	100	316	Peak
2412	89.9	-	-	84.12	32.17	4.44	30.83	100	316	Average
4824	45.64	-28.36	74	34.07	33.68	5.95	28.06	100	221	Peak
7236	49.6	-36.68	86.28	34.87	35.29	7.58	28.14	100	332	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	62.99	-21.92	84.91	57.28	32.14	4.42	30.85	106	274	Peak
2412	104.91	-	-	99.13	32.17	4.44	30.83	106	274	Peak
2412	89.42	-	-	83.64	32.17	4.44	30.83	106	274	Average
4824	46.17	-27.83	74	34.6	33.68	5.95	28.06	200	112	Peak
7236	49.03	-35.88	84.91	34.3	35.29	7.58	28.14	115	221	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.48	-	-	100.63	32.22	4.45	30.82	100	311	Peak
2437	91.7	-	-	85.85	32.22	4.45	30.82	100	311	Average
4874	47.8	-26.2	74	35.78	33.8	6.02	27.8	100	221	Peak
7311	50.31	-23.69	74	35.23	35.31	7.8	28.03	122	336	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	101.47	-	-	95.62	32.22	4.45	30.82	125	37	Peak
2437	86.25	-	-	80.4	32.22	4.45	30.82	125	37	Average
4874	46.18	-27.82	74	34.16	33.8	6.02	27.8	150	221	Peak
7311	49.98	-24.02	74	34.9	35.31	7.8	28.03	150	96	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.26	-	-	100.35	32.24	4.47	30.8	193	42	Peak
2462	98.29	-	-	92.38	32.24	4.47	30.8	193	42	Average
4924	34.04	-39.96	74	21.64	33.92	6.1	27.62	100	124	Peak
7386	50.81	-23.19	74	35.25	35.35	8.12	27.91	100	221	Peak



Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	105.35	-	-	99.44	32.24	4.47	30.8	121	106	Peak
2462	97.17	-	-	91.26	32.24	4.47	30.8	121	106	Average
4924	47.03	-26.97	74	34.63	33.92	6.1	27.62	200	122	Peak
7386	51.13	-22.87	74	35.57	35.35	8.12	27.91	200	136	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2412 MHz is fundamental signal which can be ignored. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	64.51	-22.26	86.77	58.8	32.14	4.42	30.85	106	38	Peak
2412	106.77	-	-	100.99	32.17	4.44	30.83	106	38	Peak
2412	88.52	-	-	82.74	32.17	4.44	30.83	106	38	Average
4824	46.04	-27.96	74	34.47	33.68	5.95	28.06	100	221	Peak
7236	49.62	-37.15	86.77	34.89	35.29	7.58	28.14	100	110	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	65.97	-20.87	86.84	60.26	32.14	4.42	30.85	100	111	Peak
2412	106.84	-	-	101.06	32.17	4.44	30.83	100	111	Peak
2412	88.28	-	-	82.5	32.17	4.44	30.83	100	111	Average
4824	47.37	-26.63	74	35.8	33.68	5.95	28.06	100	113	Peak
7236	49.28	-37.56	86.84	34.55	35.29	7.58	28.14	122	335	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	107.47	-	-	101.62	32.22	4.45	30.82	200	214	Peak
2437	89	-	-	83.15	32.22	4.45	30.82	200	214	Average
4874	46.28	-27.72	74	34.26	33.8	6.02	27.8	100	336	Peak
7311	49.36	-24.64	74	34.28	35.31	7.8	28.03	120	332	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	109	-	-	103.15	32.22	4.45	30.82	100	105	Peak
2437	89.84	-	-	83.99	32.22	4.45	30.82	100	105	Average
4874	46.37	-27.63	74	34.35	33.8	6.02	27.8	105	220	Peak
7311	49.94	-24.06	74	34.86	35.31	7.8	28.03	100	221	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	109.08	-	-	103.17	32.24	4.47	30.8	108	331	Peak
2462	90.7	-	-	84.79	32.24	4.47	30.8	108	331	Average
4924	45.8	-28.2	74	33.4	33.92	6.1	27.62	100	21	Peak
7386	50.52	-23.48	74	34.96	35.35	8.12	27.91	100	245	Peak



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.71	-	-	100.8	32.24	4.47	30.8	121	116	Peak
2462	88.96	-	-	83.05	32.24	4.47	30.8	121	116	Average
4924	45.96	-28.04	74	33.56	33.92	6.1	27.62	200	144	Peak
7386	50.34	-23.66	74	34.78	35.35	8.12	27.91	100	100	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	03	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. 2399 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	60.77	-20.31	81.08	55.06	32.14	4.42	30.85	122	314	Peak
2422	101.08	-	-	95.28	32.19	4.44	30.83	122	314	Peak
2422	89.82	-	-	84.02	32.19	4.44	30.83	122	314	Average
4844	44.94	-29.06	74	33.17	33.72	5.98	27.93	110	123	Peak
7266	51.07	-22.93	74	36.18	35.3	7.69	28.1	100	123	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	03	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. 2399 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	56.52	-23.4	79.92	50.81	32.14	4.42	30.85	100	277	Peak
2422	99.92	-	-	94.12	32.19	4.44	30.83	100	277	Peak
2422	88.06	-	-	82.26	32.19	4.44	30.83	100	277	Average
4844	44.45	-29.55	74	32.68	33.72	5.98	27.93	200	145	Peak
7266	49.5	-24.5	74	34.61	35.3	7.69	28.1	200	321	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
58.82	26.06	-13.94	40	63.54	-7.78	0.83	30.53	100	226	Peak
66.73	22.77	-17.23	40	58.87	-6.48	0.93	30.55	-	-	Peak
79.24	23.68	-16.32	40	55.92	-2.65	1.01	30.6	-	-	Peak
102.72	28.48	-15.02	43.5	64.19	-6.22	1.17	30.66	-	-	Peak
118.6	27.97	-15.53	43.5	62.64	-5.29	1.22	30.6	-	-	Peak
213.02	23.9	-19.6	43.5	57.7	-5.03	1.52	30.29	-	-	Peak
2437	102.66	-	-	96.81	32.22	4.45	30.82	100	119	Peak
2437	92.12	-	-	86.27	32.22	4.45	30.82	100	119	Average
4874	55.02	-18.98	74	43	33.8	6.02	27.8	100	226	Peak
4874	49.22	-4.78	54	37.2	33.8	6.02	27.8	100	226	Average
7311	50.71	-23.29	74	35.63	35.31	7.8	28.03	100	210	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
55.41	24.34	-15.66	40	66.43	-9.35	0.83	33.57	-	-	Peak
62.65	25.36	-14.64	40	64.86	-6.77	0.85	33.58	125	33	Peak
79.8	22.92	-17.08	40	55.16	0.34	1.01	33.59	-	-	Peak
100.23	20.27	-23.23	43.5	58.08	-5.36	1.16	33.61	-	-	Peak
155.91	19.82	-23.68	43.5	53.5	-1.37	1.26	33.57	-	-	Peak
176.89	22.3	-21.2	43.5	58.93	-4.35	1.28	33.56	-	-	Peak
2437	99.93	-	-	94.08	32.22	4.45	30.82	100	226	Peak
2437	89.77	-	-	83.92	32.22	4.45	30.82	100	226	Average
4874	45.52	-28.48	74	33.5	33.8	6.02	27.8	100	112	Peak
7311	50.07	-23.93	74	34.99	35.31	7.8	28.03	120	36	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	09	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	100.6	-	-	94.74	32.22	4.45	30.81	100	25	Peak
2452	92.21	-	-	86.35	32.22	4.45	30.81	100	25	Average
4904	46.3	-27.7	74	34.04	33.88	6.06	27.68	110	123	Peak
7356	50.66	-23.34	74	35.28	35.33	8.01	27.96	100	245	Peak



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Channel :	09	Relative Humidity :	49~50%
Test Engineer :	Robin Luo	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	100.19	-	-	94.33	32.22	4.45	30.81	100	25	Peak
2452	92.91	-	-	87.05	32.22	4.45	30.81	100	25	Average
4904	47.37	-26.63	74	35.11	33.88	6.06	27.68	100	113	Peak
7356	49.28	-24.72	74	33.9	35.33	8.01	27.96	122	335	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

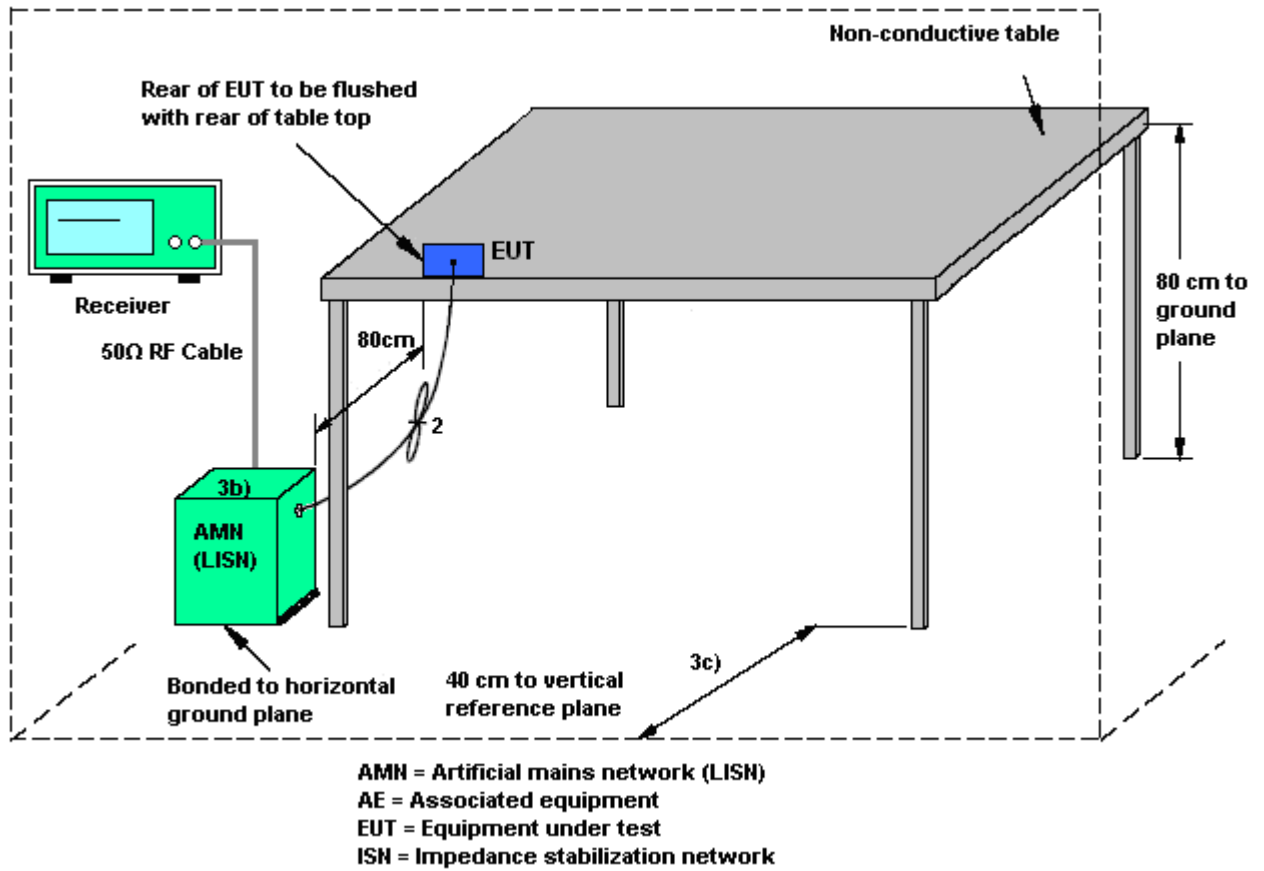



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Jerry Yi	Relative Humidity :	51~54%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

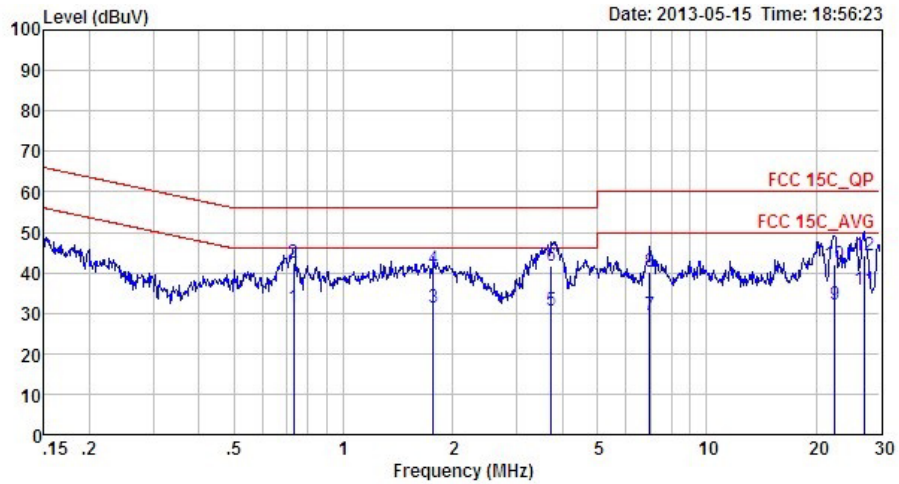


Site : CO01-SZ
 Condition: FCC 15C_QP LISN_L_2000601 LINE

Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.73	31.25	-14.75	46.00	21.13	0.02	10.10	Average
2 *	0.73	42.27	-13.73	56.00	32.15	0.02	10.10	QP
3	1.77	31.26	-14.74	46.00	21.09	0.03	10.14	Average
4	1.77	40.85	-15.15	56.00	30.68	0.03	10.14	QP
5	3.74	30.59	-15.41	46.00	20.35	0.05	10.19	Average
6	3.74	41.77	-14.23	56.00	31.53	0.05	10.19	QP
7	6.99	29.69	-20.31	50.00	19.39	0.10	10.20	Average
8	6.99	40.40	-19.60	60.00	30.10	0.10	10.20	QP
9	22.54	32.05	-17.95	50.00	21.17	0.43	10.45	Average
10	22.54	42.16	-17.84	60.00	31.28	0.43	10.45	QP
11	27.27	35.89	-14.11	50.00	24.88	0.58	10.43	Average
12	27.27	44.27	-15.73	60.00	33.26	0.58	10.43	QP



Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Jerry Yi	Relative Humidity :	51~54%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

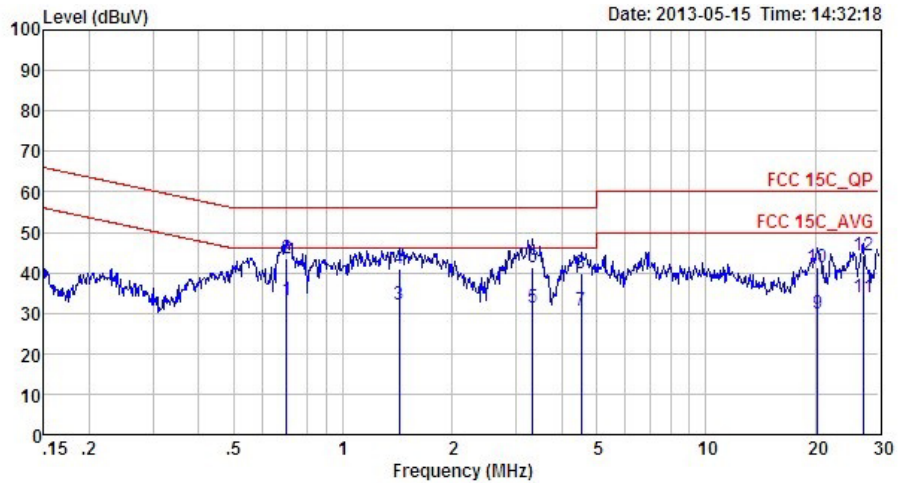

Site : C001-SZ
 Condition: FCC 15C_QP LISN_N_2000601 NEUTRAL

Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.70	33.06	-12.94	46.00	22.94	0.02	10.10	Average
2 *	0.70	43.59	-12.41	56.00	33.47	0.02	10.10	QP
3	1.43	32.16	-13.84	46.00	22.00	0.03	10.13	Average
4	1.43	41.14	-14.86	56.00	30.98	0.03	10.13	QP
5	3.33	31.24	-14.76	46.00	21.00	0.05	10.19	Average
6	3.33	41.40	-14.60	56.00	31.16	0.05	10.19	QP
7	4.53	30.65	-15.35	46.00	20.39	0.07	10.19	Average
8	4.53	40.00	-16.00	56.00	29.74	0.07	10.19	QP
9	20.27	30.07	-19.93	50.00	18.98	0.50	10.59	Average
10	20.27	41.25	-18.75	60.00	30.16	0.50	10.59	QP
11	27.13	33.95	-16.05	50.00	22.62	0.90	10.43	Average
12	27.13	44.41	-15.59	60.00	33.08	0.90	10.43	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	May 16, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	May 16, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	May 16, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
DC Power Supply	TOPWORD	3303DR	N/A714621	N/A	Mar. 28, 2013	May 16, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Thermal Chamber	Hongzhan	LP-150U	HD20120425	N/A	Mar. 28, 2013	May 16, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
ESCI TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Mar. 28, 2013	May 21, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP30	101362	9kHz~30GHz	Oct. 11, 2012	May 21, 2013	Oct. 10, 2013	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	May 21, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Nov. 03, 2012	May 21, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3GHz Gain 30dB	Mar. 28, 2013	May 21, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	May 21, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170249	14GHz~40GHz	Nov. 23, 2012	May 21, 2013	Nov. 22, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2012	May 21, 2013	Oct. 21, 2013	Radiation (03CH01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz~3GHz	Mar. 28, 2013	May 15, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	May 15, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	May 15, 2013	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	N/A	Nov. 20, 2012	May 15, 2013	Nov. 19, 2013	Conduction (CO01-SZ)
AC Filter	ETS-LINDGREN	LRE-2030/P EN 256260	00093783	N/A	N/A	May 15, 2013	N/A	Conduction (CO01-SZ)
AC Filter	ETS-LINDGREN	LRE-2030/P EN 256260	00097973	N/A	N/A	May 15, 2013	N/A	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP342211 as below.