



---

# TEST REPORT

---

Report No.: SRTC2014-H024-E0017

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: 6037B

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part 24E, Part 22H, Part 2

(April 25, 2013 edition)

FCC ID: RAD457

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

## CONTENTS

1. General information .....	3
1.1 Notes of the test report .....	3
1.2 Information about the testing laboratory .....	3
1.3 Applicant's details .....	3
1.4 Manufacturer's details .....	3
1.5 Application details .....	4
1.6 Reference specification .....	4
1.7 Information of EUT .....	4
1.7.1 General information .....	4
1.7.2 EUT details .....	5
1.7.3 Auxiliary equipment details .....	5
2. Test information .....	7
2.1 Summary of the test results .....	7
2.2 Test result .....	8
2.2.1 GSM850 .....	8
2.2.1.1 RF Power Output-FCC Part2.1046 .....	8
2.2.1.2 Effective Radiated Power-FCC Part22.913(a) .....	10
2.2.1.3 Occupied Bandwidth-FCC Part2.1049 .....	13
2.2.1.4 Emission Bandwidth-FCC Part22.917(b) .....	17
2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917(a) .....	18
2.2.1.6 Band Edges Compliance-FCC Part2.1051/22.917(a) .....	22
2.2.1.7 Frequency Stability-FCC Part2.1055/22.355 .....	25
2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a) .....	27
2.2.2 PCS1900 .....	32
2.2.2.1 RF Power Output-FCC Part2.1046 .....	32
2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c) .....	34
2.2.2.3 Occupied Bandwidth-FCC Part2.1049 .....	37
2.2.2.4 Emission Bandwidth-FCC Part24.238(b) .....	41
2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238(a) .....	42
2.2.2.6 Band Edges Compliance-FCC Part2.1051/24.238(a) .....	46
2.2.2.7 Frequency Stability-FCC Part2.1055/24.235 .....	49
2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/24.238(a) .....	51
2.3. List of test equipments .....	56
Appendix .....	57

## 1. General information

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company: The State Radio\_monitoring\_center Testing Center (SRTC)  
Address: No.80 Beilishi Road, Xicheng District, Beijing China  
City: Beijing  
Country or Region: China  
Contacted person: Wang Junfeng  
Tel: +86 10 68009181 +86 10 68009202  
Fax: +86 10 68009195 +86 10 68009205  
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

### 1.3 Applicant's details

Company: TCT Mobile Limited  
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang  
High-Tech Park, Pudong Area  
City: Shanghai  
Country or Region: P.R.China  
Grantee Code: RAD  
Contacted person: Gong Zhizhou  
Tel: +86-21-61460890  
Fax: +86-21-61460602  
Email: zhizhou.gong@tcl.com

### 1.4 Manufacturer's details

Company: TCT Mobile Limited  
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang  
High-Tech Park, Pudong Area  
City: Shanghai  
Country or Region: P.R.China  
Contacted person: Gong Zhizhou  
Tel: +86-21-61460890  
Fax: +86-21-61460602  
Email: zhizhou.gong@tcl.com

## 1.5 Application details

Date of reception of test sample: 3<sup>rd</sup> March 2014

Date of test: 4<sup>th</sup> March 2014 to 25<sup>th</sup> March 2014

## 1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (April 25, 2013 edition)

## 1.7 Information of EUT

### 1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD457
Frequency Range	GSM850: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz
Rated Output Power	GSM850:33.0dBm PCS1900:30.0dBm
Modulation Type	GSM/GPRS:GMSK EDGE:GMSK/8PSK
Emission Designator	GSM/GPRS:300KGXW EDGE:300KG7W
Duplex Mode	FDD
Duplex Spacing	GSM850:45MHz PCS1900:80MHz
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.8V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.35V
HW Version	PIO
SW Version	v3EH9-US

### 1.7.2 EUT details

Product Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	6037B	014017009000082

### 1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	one touch UC12US
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	one touch UC12EU
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	one touch UC12UK
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Model Number	TLp020C2
Capacity	2000mAh
Rated Voltage	4.35V d.c.

---

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA0000025C1

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA0000025C2




Note: As the information described above, there are three different models of charger manufactured by the same company and two different models of data cable manufactured by two different companies.

The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger and one model of data cable) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger one touch UC12US and the data cable CDA0000025C1.

## 2. Test information

### 2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)/24.232(c)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	22.917(b)/24.238(b)	Pass
5	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)	Pass
6	Band Edges Compliance	2.1051/22.917(a)/24.238(a)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)	Pass

This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab 	Checked by: Mr. Wang Junfeng Deputy director of the test lab 
Tested by: Mr. Zhang Wentao Test engineer 	Issued date:  <b>2014.04.11</b>

## 2.2 Test result


### 2.2.1 GSM850

#### 2.2.1.1 RF Power Output-FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits	$\leq 33\text{dBm}$
--------	---------------------

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.75
836.4	189	32.78
848.8	251	32.75

EDGE (GMSK, 1Slot) MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.76
836.4	189	32.77
848.8	251	32.74



EDGE (8PSK, 1Slot) MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	25.24
836.4	189	25.38
848.8	251	25.44


\* For EDGE Mode, GMSK modulation type is selected as worse condition. So the following cases 2.2.1.3 – 2.2.1.8 are performed with this condition.

### 2.2.1.2 Effective Radiated Power-FCC Part22.913(a)


Ambient condition:

Temperature	Relative humidity	Pressure
19.3°C	41.3%	100.7kPa

Test setup:

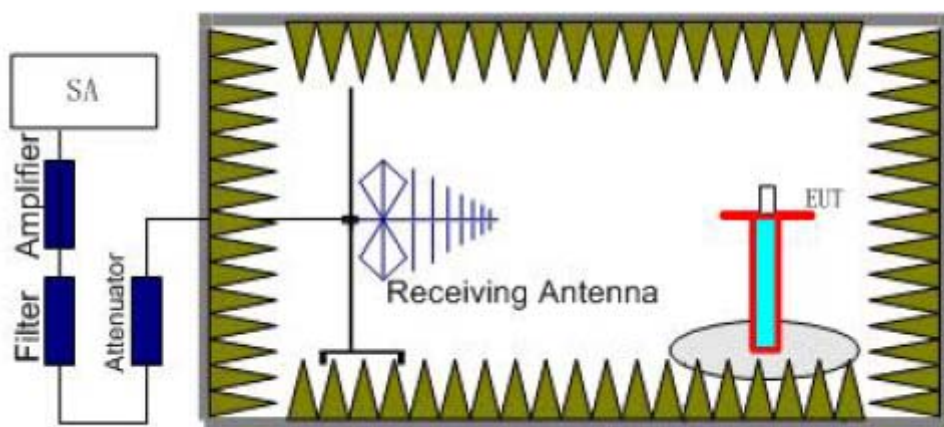

Step 1

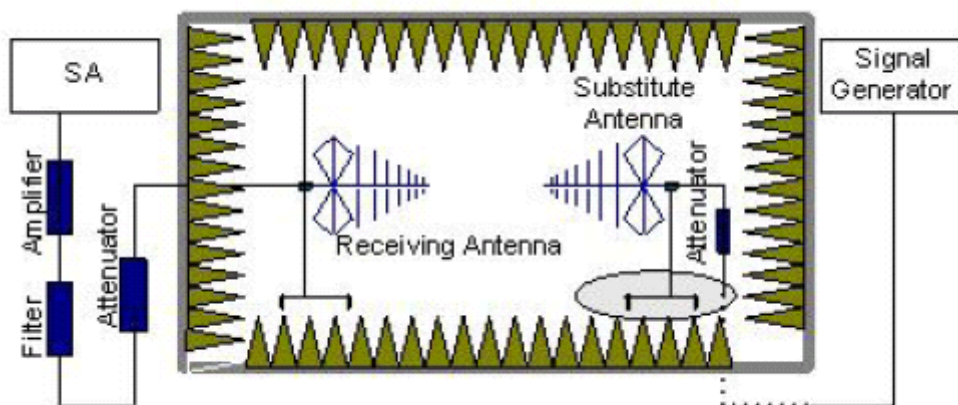

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the

test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

**Step 2:**

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).

The measurement will be done at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

**Limits:**

Operation Mode	Power Step	E.R.P. (dBm)
GSM	5	≤38.45
GPRS	3	≤38.45
EDGE	6	≤38.45

Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	31.2	-3.8	8.6	2.15	28.55	Vertical
836.4	5	30.8	-3.8	8.6	2.15	28.15	Vertical
848.8	5	30.7	-3.8	8.6	2.15	28.05	Vertical

EDGE (GMSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	6	26.8	-3.8	8.6	2.15	24.15	Vertical
836.4	6	27.2	-3.8	8.6	2.15	24.55	Vertical
848.8	6	27.7	-3.8	8.6	2.15	25.05	Vertical

EDGE (8PSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	6	24.0	-3.8	8.6	2.15	21.35	Vertical
836.4	6	24.1	-3.8	8.6	2.15	21.45	Vertical
848.8	6	24.9	-3.8	8.6	2.15	22.25	Vertical

Frequency: 824.2MHz


Peak ERP(dBm) = Pmea(28.55dBm)+Pca(-3.8dB)+Ga(8.6dB)-2.15dB = 31.2dBm

### 2.2.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

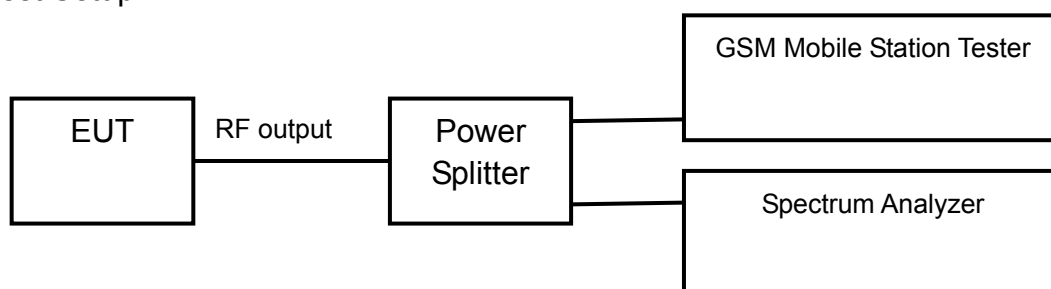

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	246.12
836.4	189	246.35
848.8	251	244.35


EDGE (GMSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	245.92
836.4	189	246.85
848.8	251	244.61


GSM/GPRS MODE:

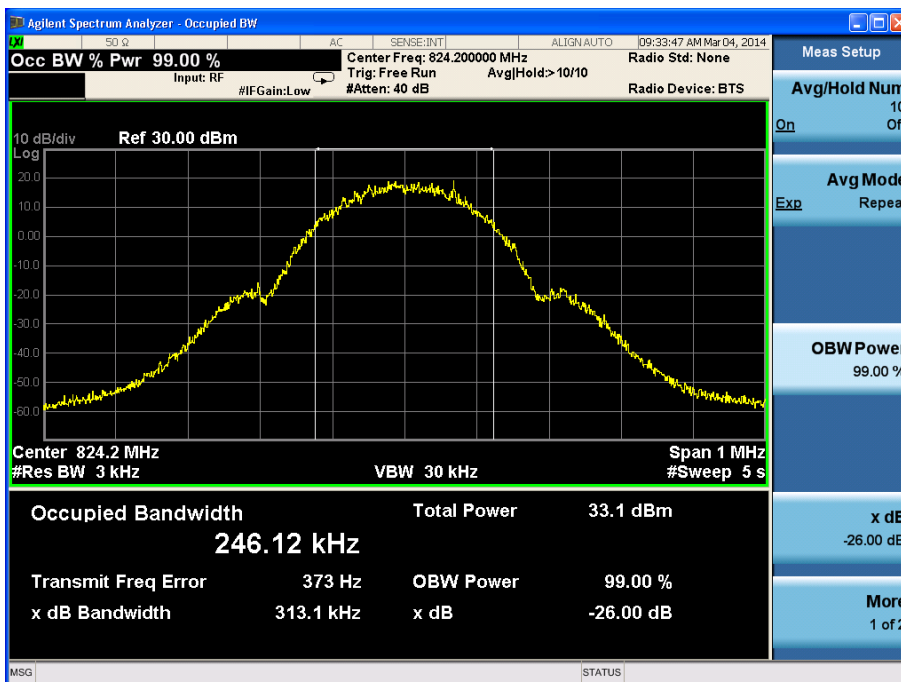

Channel 128

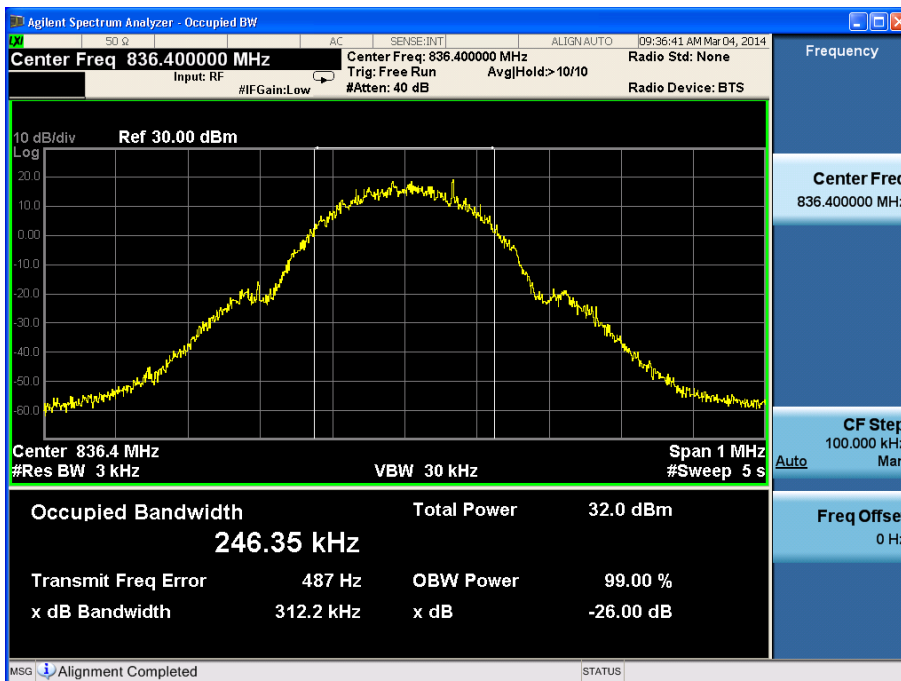


Channel 189

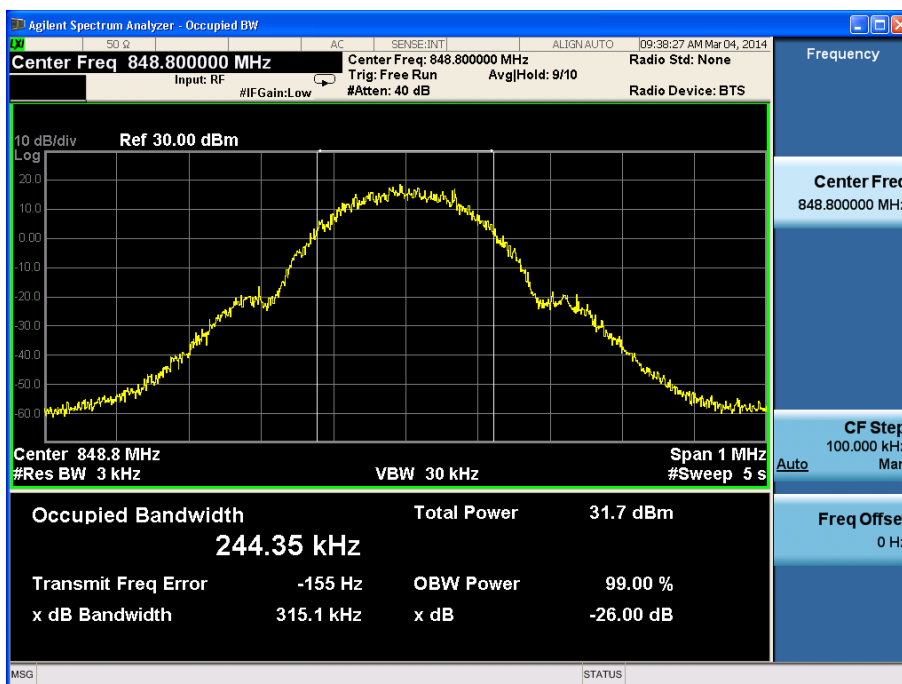


Channel 251


EDGE (GMSK) MODE:

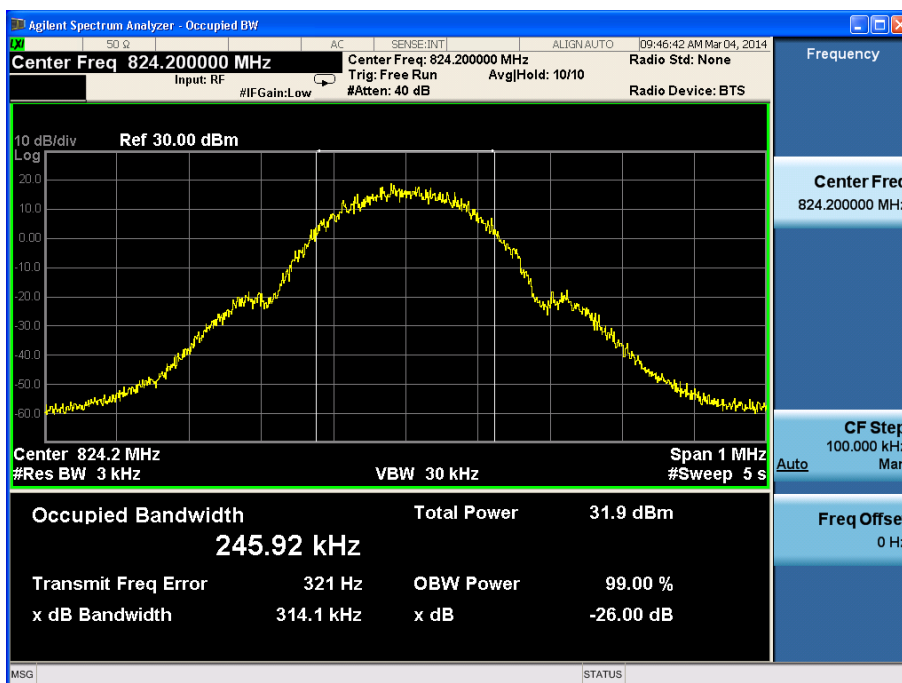

Channel 128

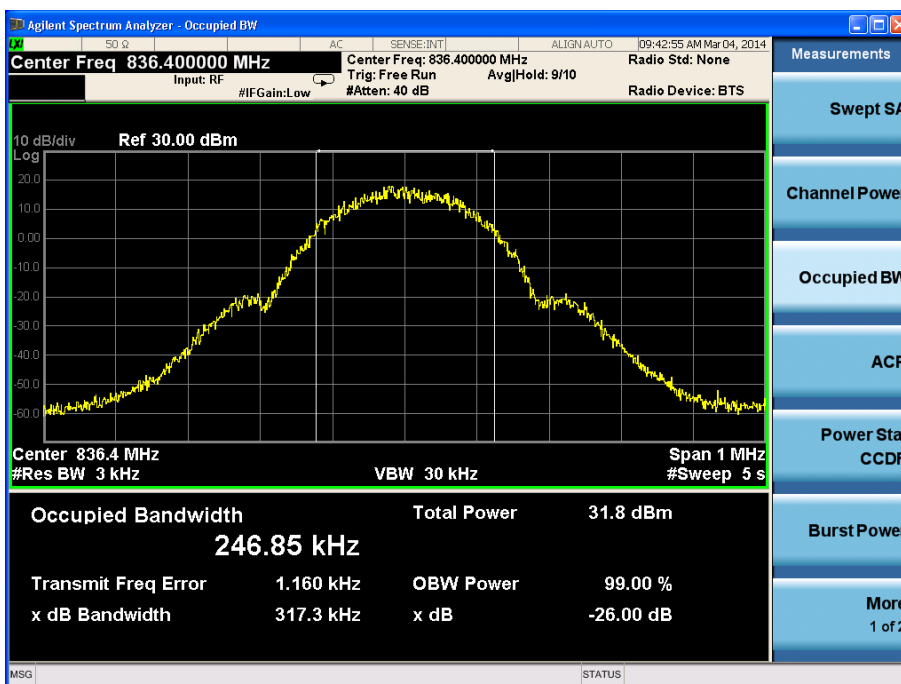

Channel 189

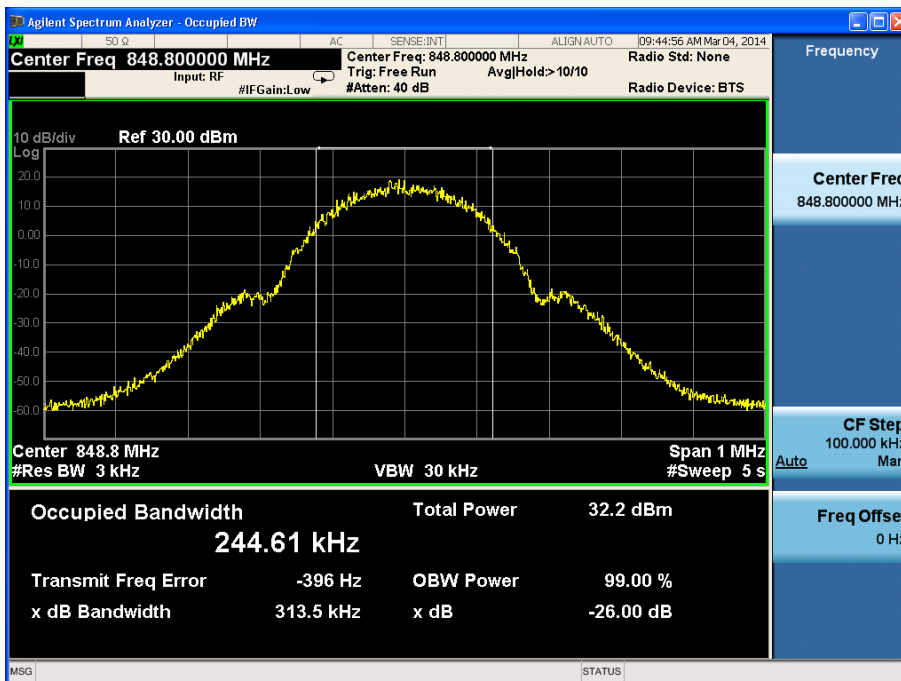

Channel 251




### 2.2.1.4 Emission Bandwidth-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23℃	42%	101.9kPa

Test Setup:

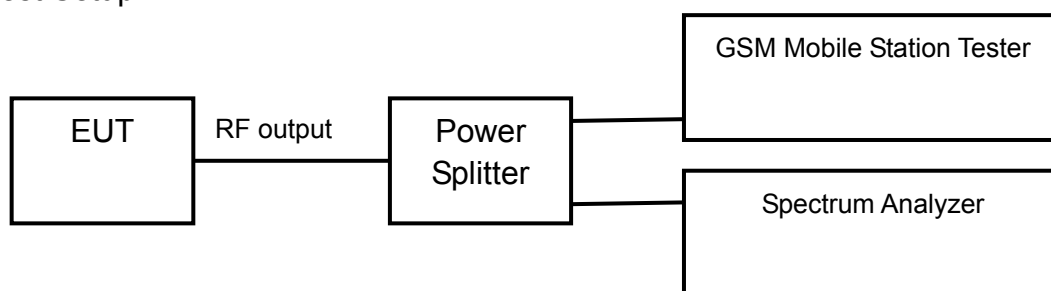

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of -26dB transmitter power can be read on spectrum analyzer.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits: No specific emission bandwidth requirements in part 22.917(b)

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
824.2	128	313.1
836.4	189	312.2
848.8	251	315.1

EDGE (GMSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
824.2	128	314.1
836.4	189	317.3
848.8	251	313.5

### 2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

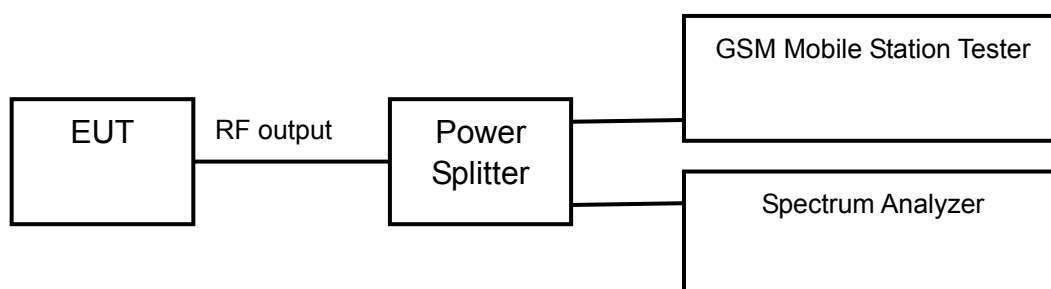

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No189 (middle channel of GSM850 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

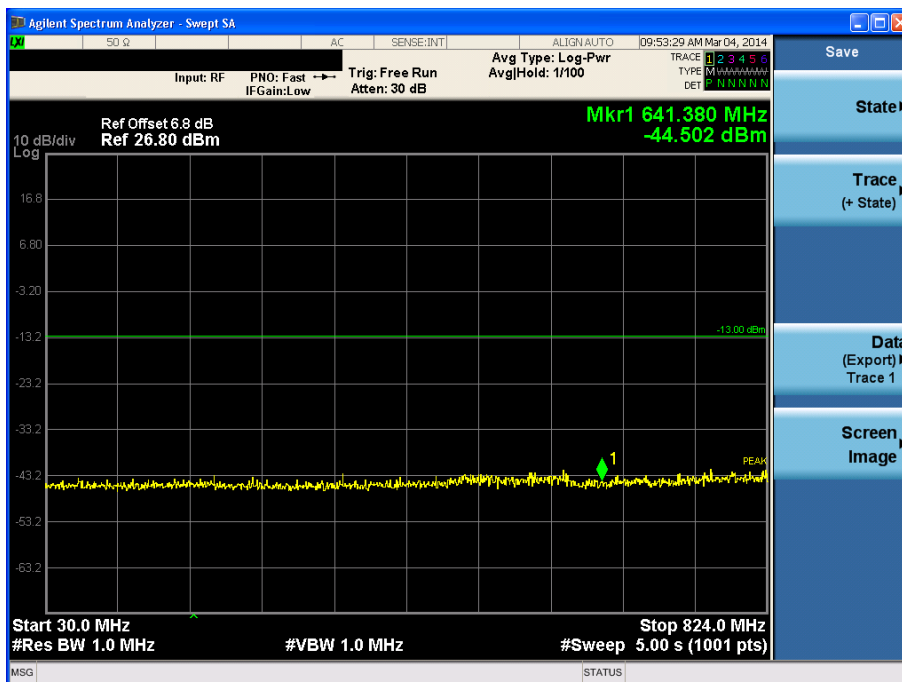


Channel 189, 30MHz~824MHz

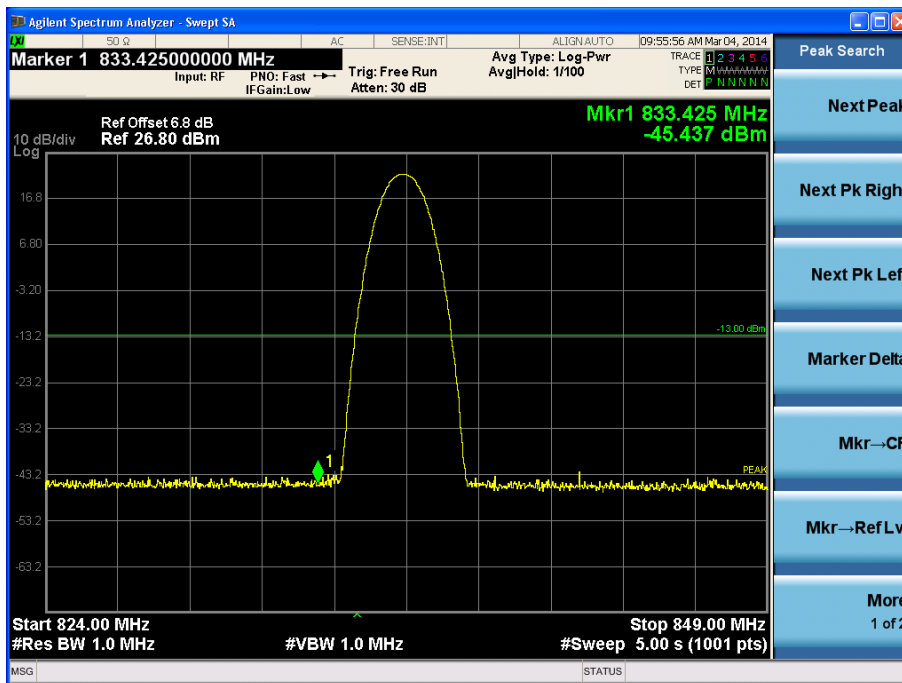


Channel 189, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

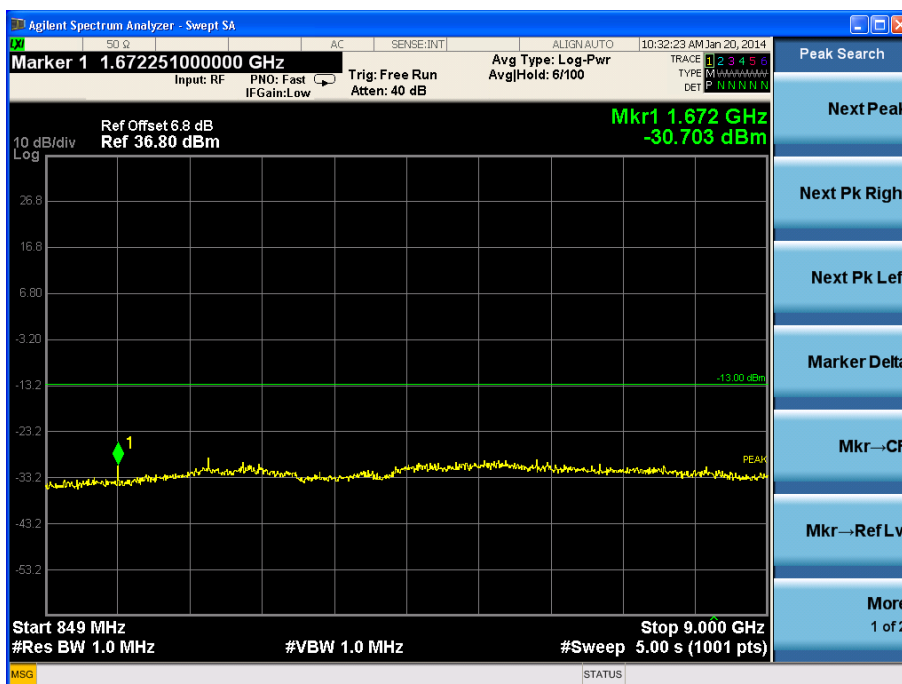


Channel 189, 849MHz~9GHz

EDGE (GMSK) MODE:

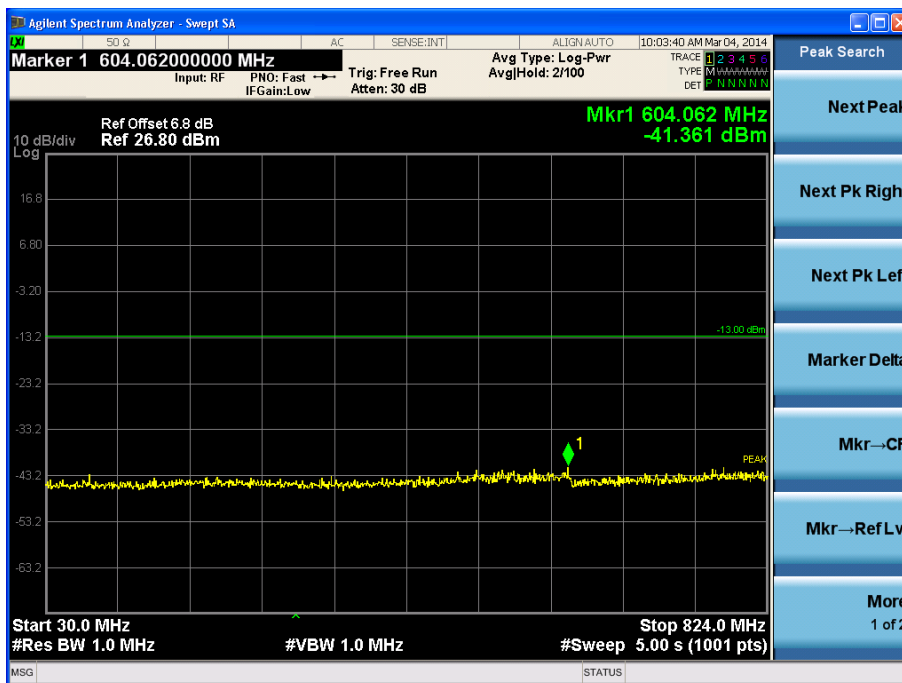


Channel 189, 30MHz~824MHz

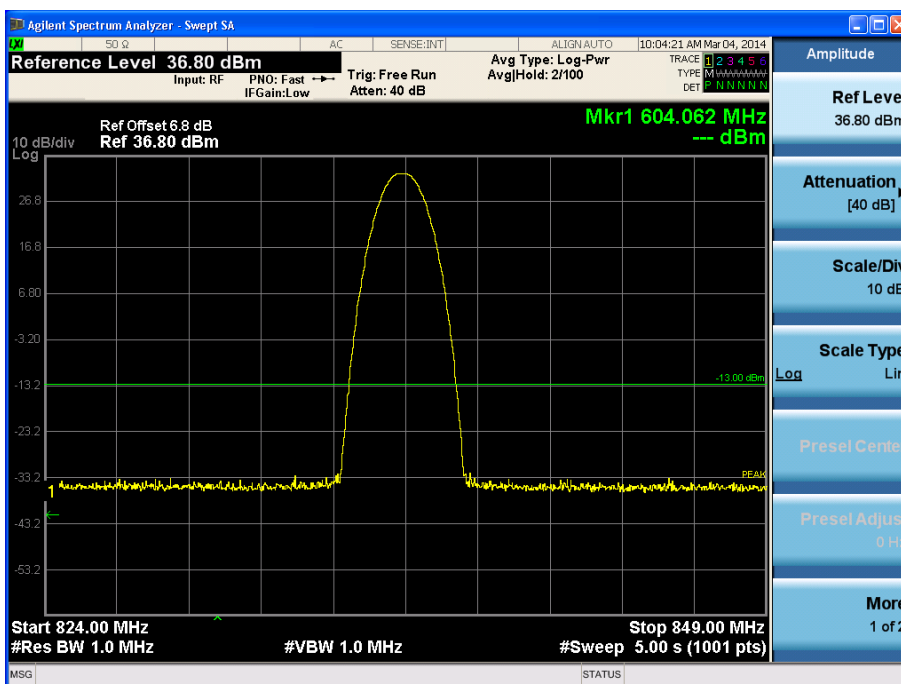

Channel 189, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

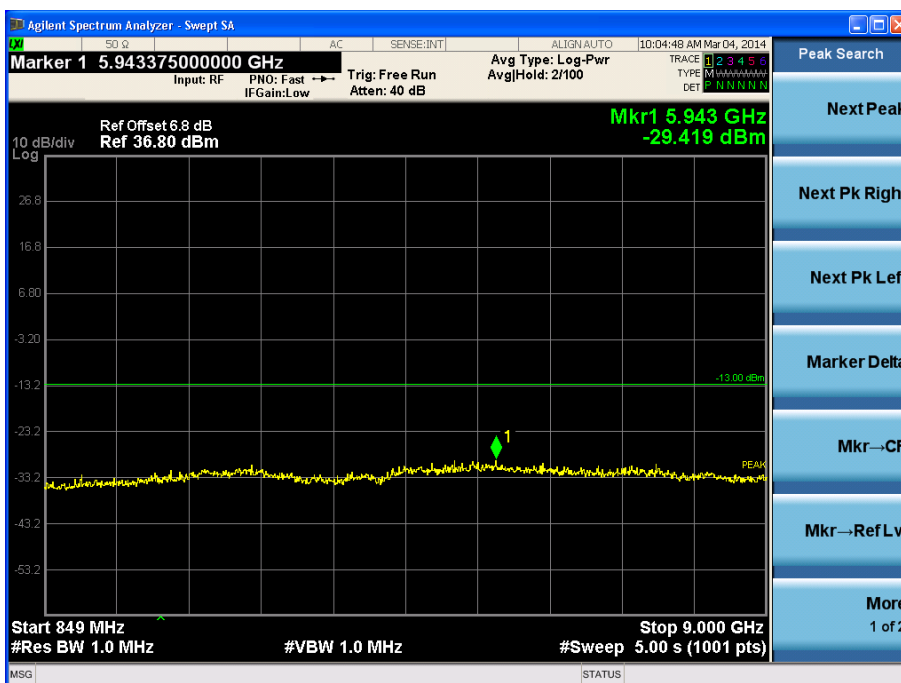


Channel 189, 849MHz~9GHz

### 2.2.1.6 Band Edges Compliance-FCC Part2.1051/22.917(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

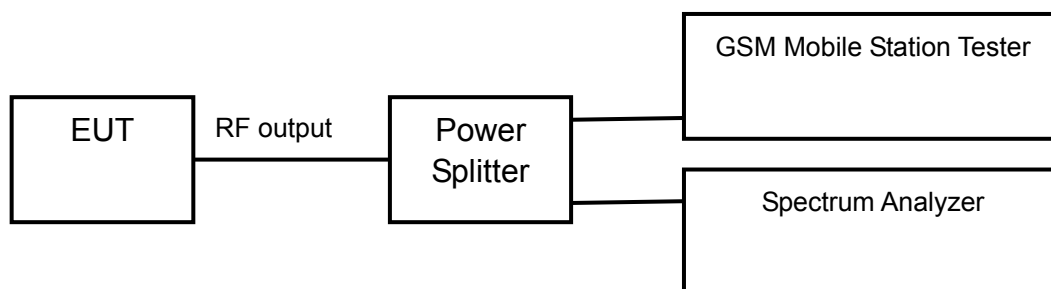

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No128 and No251 (Bottom and top channels of GSM850 band)

Limits	$\leq -13\text{dBm}$
--------	----------------------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

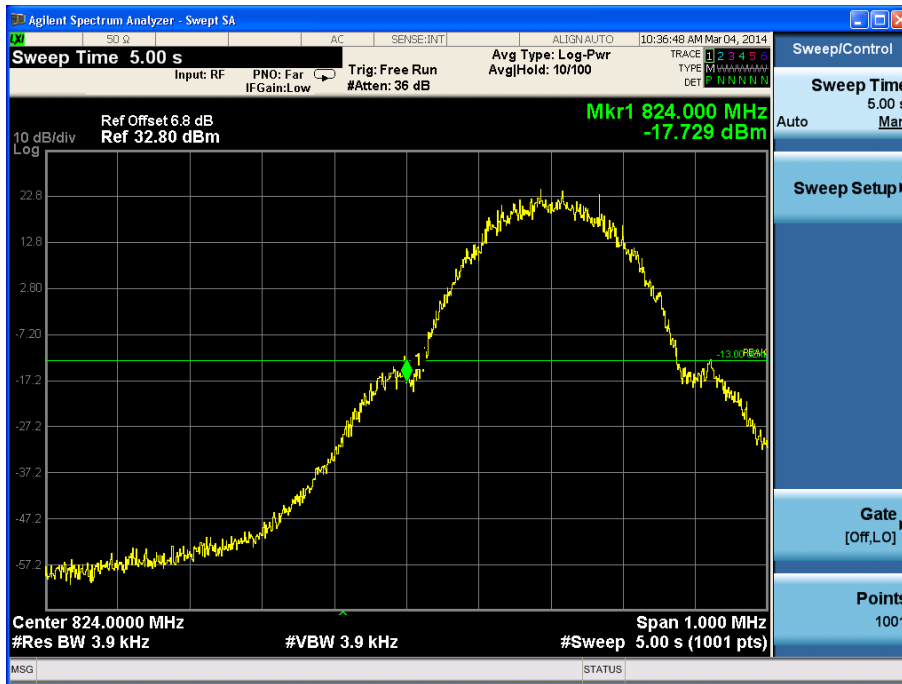


Channel 128

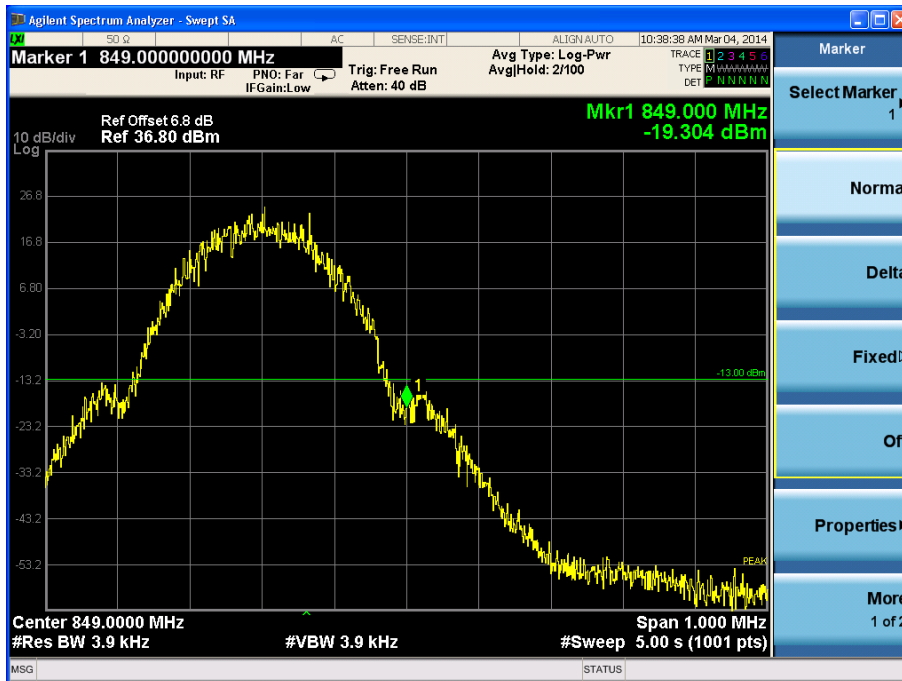


Channel 251

EDGE (GMSK) MODE:

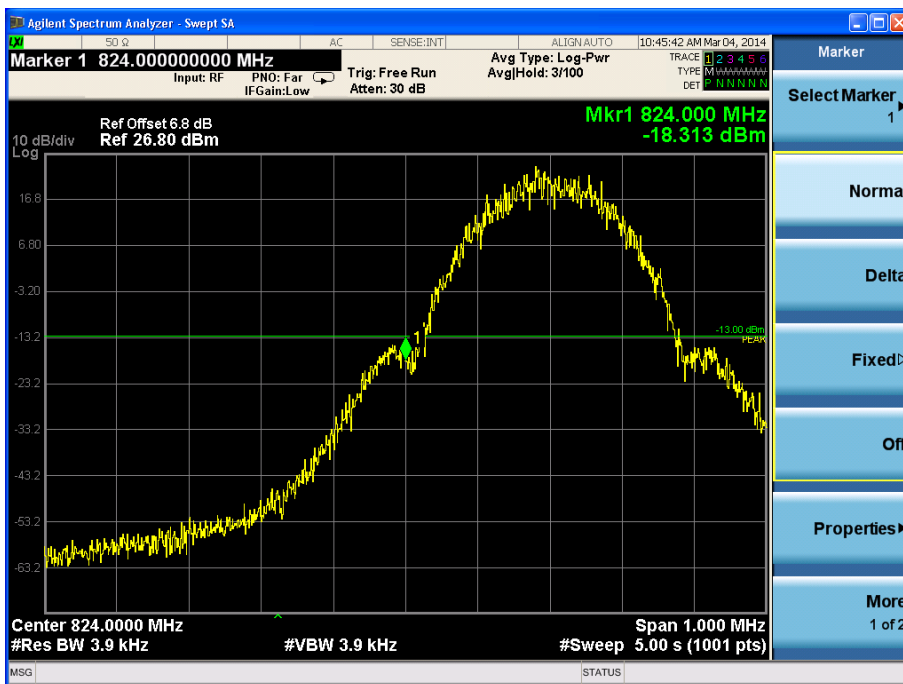

Channel 128

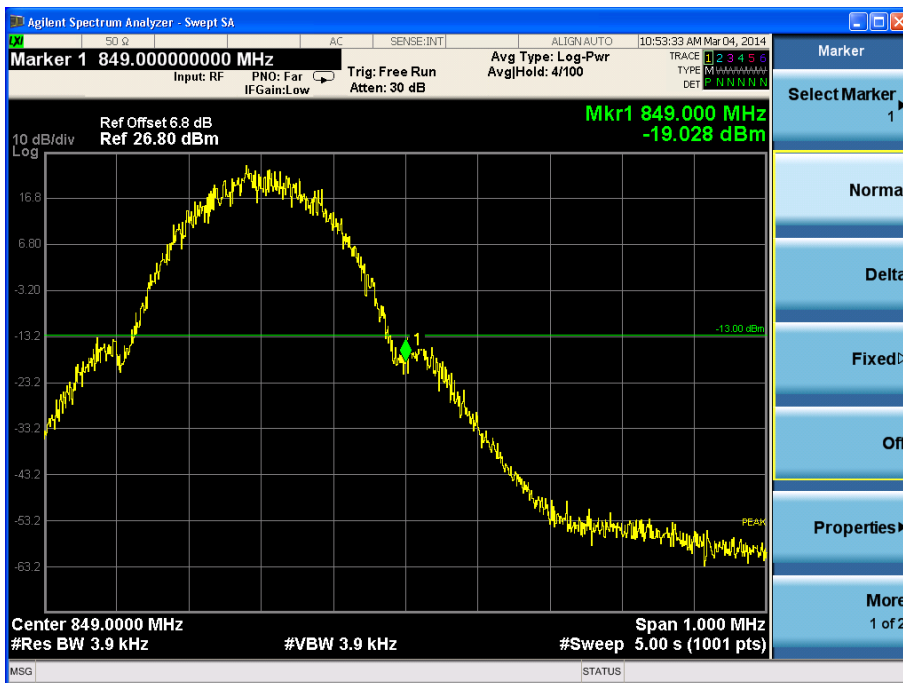

Channel 251




### 2.2.1.7 Frequency Stability-FCC Part2.1055/22.355

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

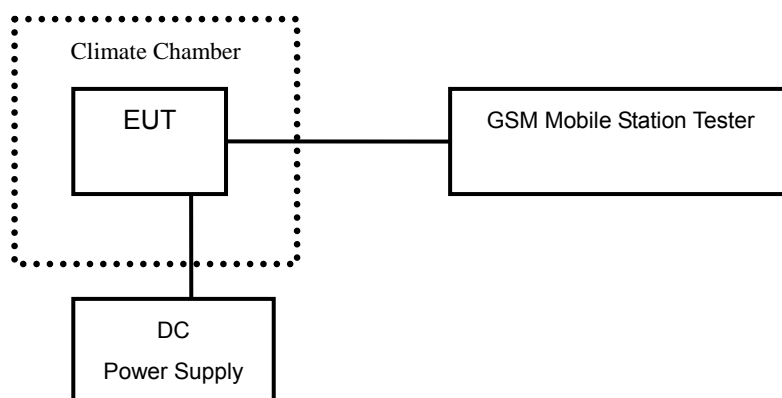

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.35V. The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

Test result:

GSM/GPRS MODE:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 128	Channel 189	Channel 251
-30	0.014	0.012	0.015
-20	0.012	0.011	0.012
-10	0.011	0.010	0.014
0	0.009	0.011	0.010
+10	0.010	0.011	0.011
+20	0.010	0.013	0.015
+30	0.011	0.011	0.008
+40	0.010	0.014	0.010
+50	0.014	0.015	0.011

Voltage (V)	Test Result (ppm)@20°C		
	Channel 128	Channel 189	Channel 251
3.5	0.013	0.015	0.015
4.35	0.015	0.014	0.016

EDGE (GMSK) MODE:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 128	Channel 189	Channel 251
-30	0.013	0.012	0.012
-20	0.011	0.011	0.010
-10	0.012	0.009	0.012
0	0.011	0.011	0.011
+10	0.010	0.008	0.010
+20	0.011	0.012	0.011
+30	0.012	0.012	0.014
+40	0.012	0.012	0.013
+50	0.014	0.010	0.014


Voltage (V)	Test Result (ppm)@20°C		
	Channel 128	Channel 189	Channel 251
3.5	0.009	0.011	0.010
4.35	0.011	0.010	0.009

### 2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)


Ambient condition

Temperature	Relative humidity	Pressure
23°C	43%	99.7kPa

Test Setup:

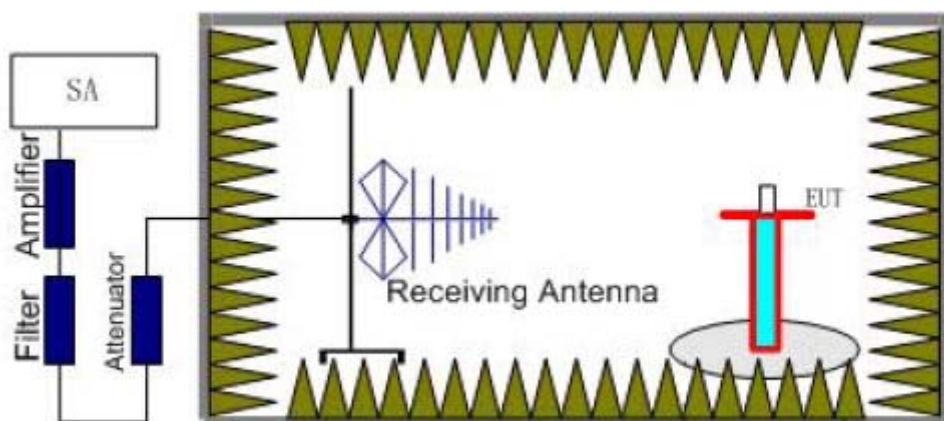

Step 1

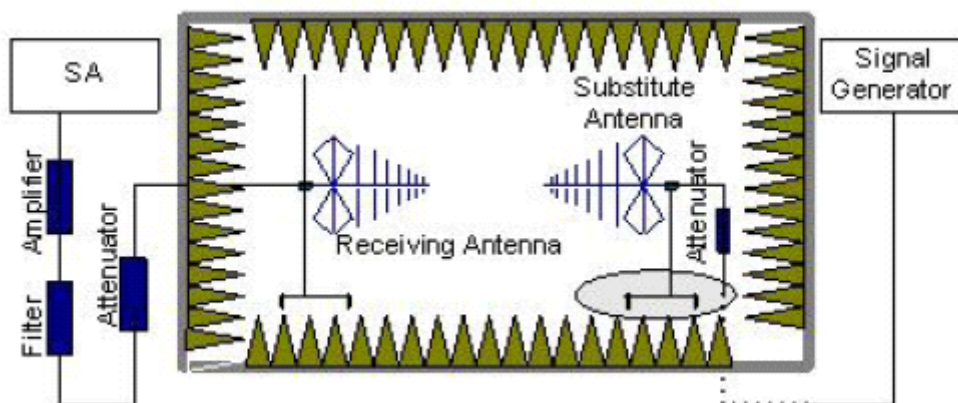

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed

on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 128), middle (Channel 189) and top (Channel 251) channels of the GSM 850 band.

### Test result

#### GSM/GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1605.52	-42.3	-4.6	8.3	-46.0	-13	Vertical
2575.34	-42.2	-5.9	8.9	-45.2	-13	Vertical
2786.56	-42.6	-5.9	8.9	-45.6	-13	Vertical
3302.72	-51.7	-7.5	10.2	-54.4	-13	Vertical
7034.46	-54.6	-9.4	12.0	-57.2	-13	Vertical
9948.87	-54.8	-11.4	13.8	-57.2	-13	Horizontal

#### EDGE (GMSK) MODE Channel 128:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1634.95	-41.7	-4.6	8.3	-45.4	-13	Vertical
2579.31	-42.5	-5.9	8.9	-45.5	-13	Vertical
2832.64	-42.8	-5.9	8.9	-45.8	-13	Vertical
3354.78	-52.6	-7.5	10.2	-55.3	-13	Vertical
7013.38	-54.4	-9.4	12.0	-57.0	-13	Vertical
9958.95	-55.1	-11.4	13.8	-57.5	-13	Vertical

GSM/GPRS MODE Channel 189:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1632.13	-41.5	-4.6	8.3	-45.2	-13	Vertical
2567.73	-42.4	-5.9	8.9	-45.4	-13	Vertical
2854.34	-42.6	-5.9	8.9	-45.6	-13	Vertical
3326.76	-52.6	-7.5	10.2	-55.3	-13	Vertical
6965.34	-54.7	-9.4	12.0	-57.3	-13	Vertical
9945.74	-55.7	-11.4	13.8	-58.1	-13	Vertical

EDGE (GMSK) MODE Channel 189:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1656.63	-41.3	-4.6	8.3	-45.0	-13	Vertical
2532.27	-42.5	-5.9	8.9	-45.5	-13	Horizontal
2758.64	-43.4	-5.9	8.9	-46.4	-13	Vertical
3369.68	-52.6	-7.5	10.2	-55.3	-13	Vertical
6954.72	-54.5	-9.4	12.0	-57.1	-13	Vertical
9966.25	-55.4	-11.4	13.8	-57.8	-13	Vertical

GSM/GPRS MODE Channel 251:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1654.57	-41.8	-4.6	8.3	-45.5	-13	Vertical
2556.21	-42.4	-5.9	8.9	-45.4	-13	Horizontal
2842.48	-42.8	-5.9	8.9	-45.8	-13	Vertical
3351.32	-53.9	-7.5	10.2	-56.6	-13	Vertical
7032.75	-54.2	-9.4	12.0	-56.8	-13	Vertical
9968.31	-55.1	-11.4	13.8	-57.5	-13	Vertical

EDGE (GMSK) MODE Channel 251:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1635.67	-41.4	-4.6	8.3	-45.1	-13	Vertical
2542.62	-42.2	-5.9	8.9	-45.2	-13	Vertical
2785.58	-42.5	-5.9	8.9	-45.5	-13	Vertical
3352.24	-53.7	-7.5	10.2	-56.4	-13	Vertical I
6997.47	-54.8	-9.4	12.0	-57.4	-13	Horizontal
9935.83	-55.6	-11.4	13.8	-58.0	-13	Vertical


## 2.2.2 PCS1900

### 2.2.2.1 RF Power Output-FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

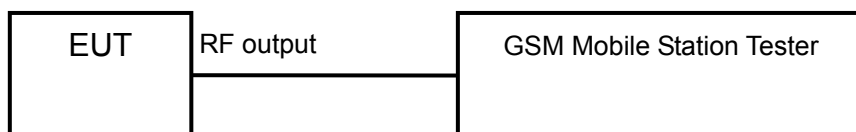

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	≤30dBm

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.23
1880.0	661	29.35
1909.8	810	29.44

EDGE (GMSK, 1Slot) MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.25
1880.0	661	29.29
1909.8	810	29.42



EDGE (8PSK, 1Slot) MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	23.72
1880.0	661	23.38
1909.8	810	23.98


\* For EDGE Mode, GMSK modulation type is selected as worse condition. So the following cases 2.2.2.3 – 2.2.2.8 are performed with this condition.

### 2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c)


Ambient condition:

Temperature	Relative humidity	Pressure
23°C	43%	99.7kPa

Test setup:

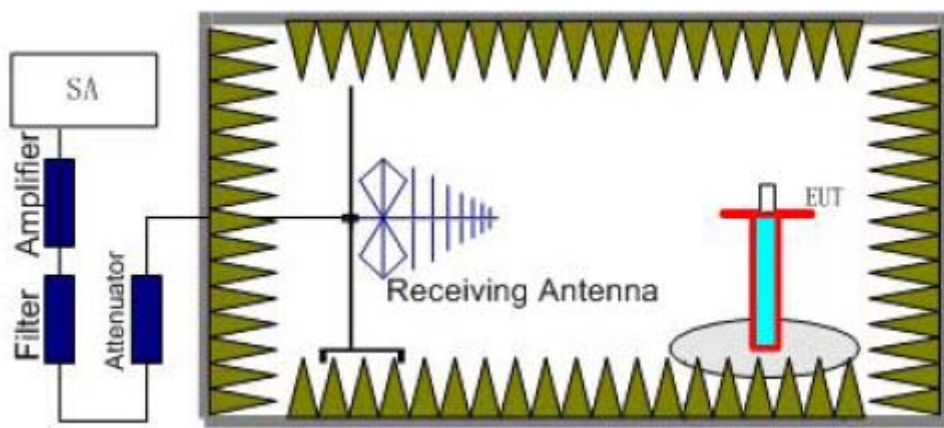

Step 1

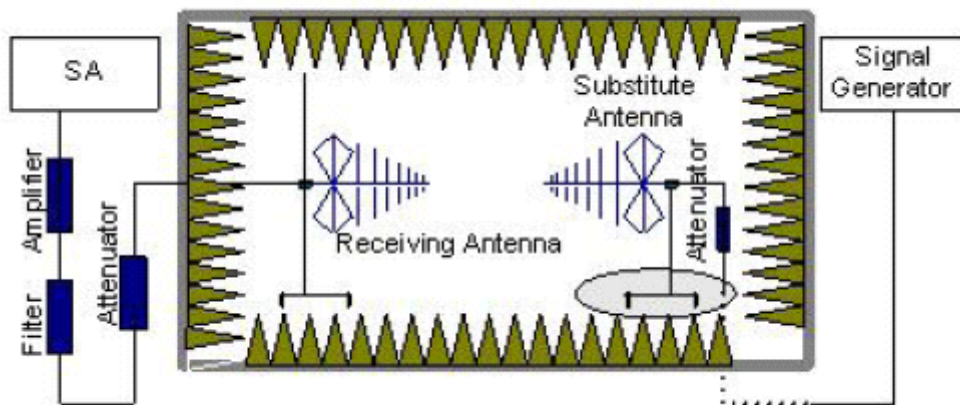

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed

on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

**Step 2:**

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

The measurement will be done at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

**Limits:**

Operation Mode	Power Step	E.I.R.P. (dBm)
GSM	0	≤33
GPRS	3	≤33
EDGE	5	≤33

Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	30.4	-4.8	8.6	26.6	Vertical
1880.0	0	30.6	-4.8	8.6	26.8	Vertical
1909.8	0	30.8	-4.8	8.6	27.0	Vertical

EDGE (GMSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	5	24.3	-4.8	8.6	20.5	Vertical
1880.0	5	24.4	-4.8	8.6	20.6	Vertical
1909.8	5	24.2	-4.8	8.6	20.4	Vertical

EDGE (8PSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	5	21.4	-4.8	8.6	17.6	Vertical
1880.0	5	21.6	-4.8	8.6	17.8	Vertical
1909.8	5	21.0	-4.8	8.6	17.2	Vertical

Frequency: 1909.8MHz


Peak EIRP(dBm) = Pmea (27.0dBm)+Pca(-4.8dB)+Ga(8.6dB) = 30.8dBm

### 2.2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

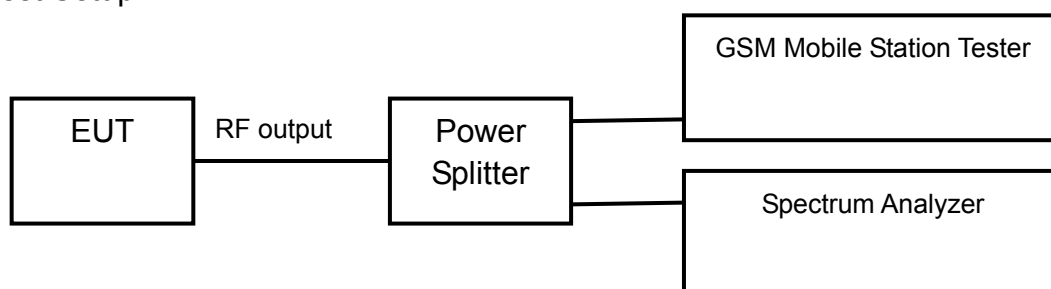

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	245.58
1880.0	661	245.38
1909.8	810	245.77


EDGE (GMSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	243.85
1880.0	661	245.18
1909.8	810	243.22


GSM/GPRS MODE:

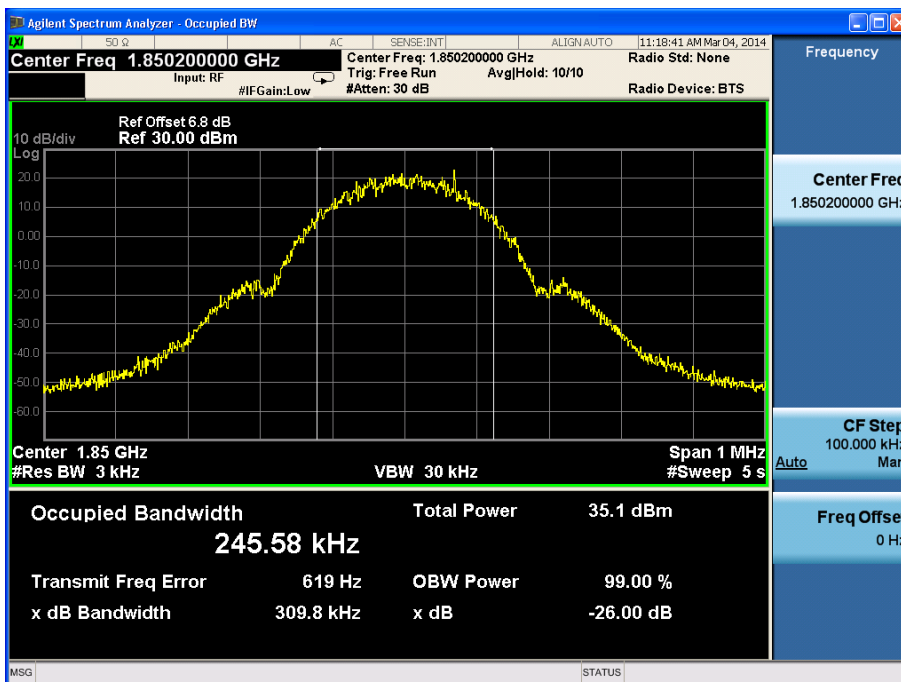

Channel 512

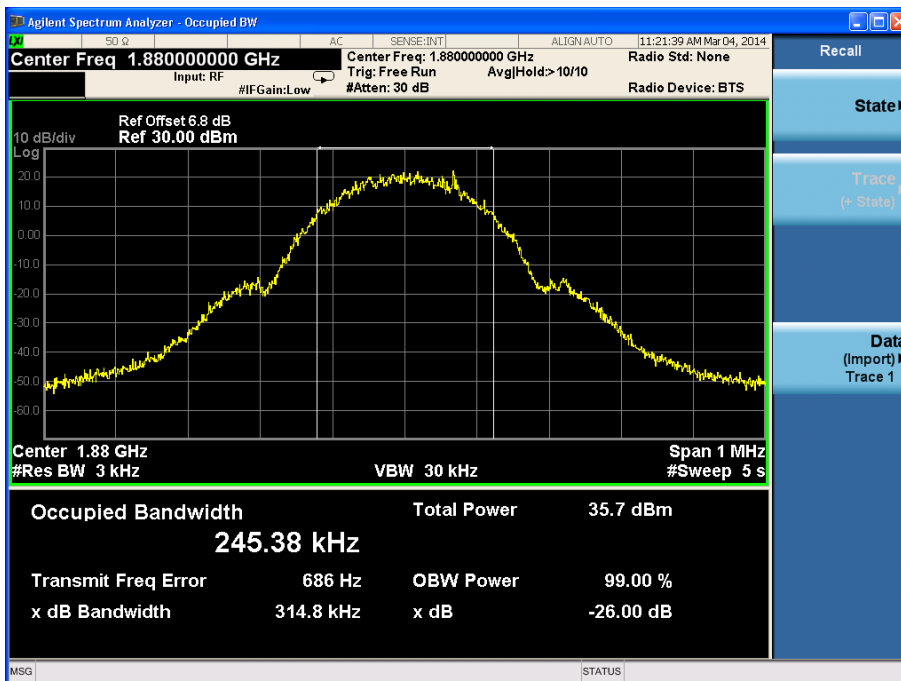


Channel 661

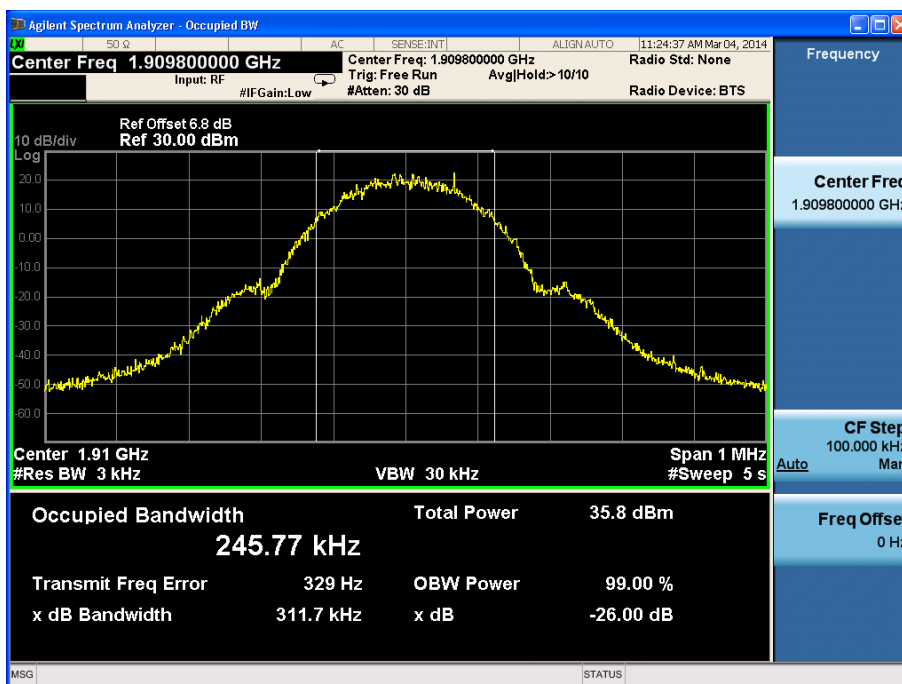


Channel 810


EDGE (GMSK) MODE:

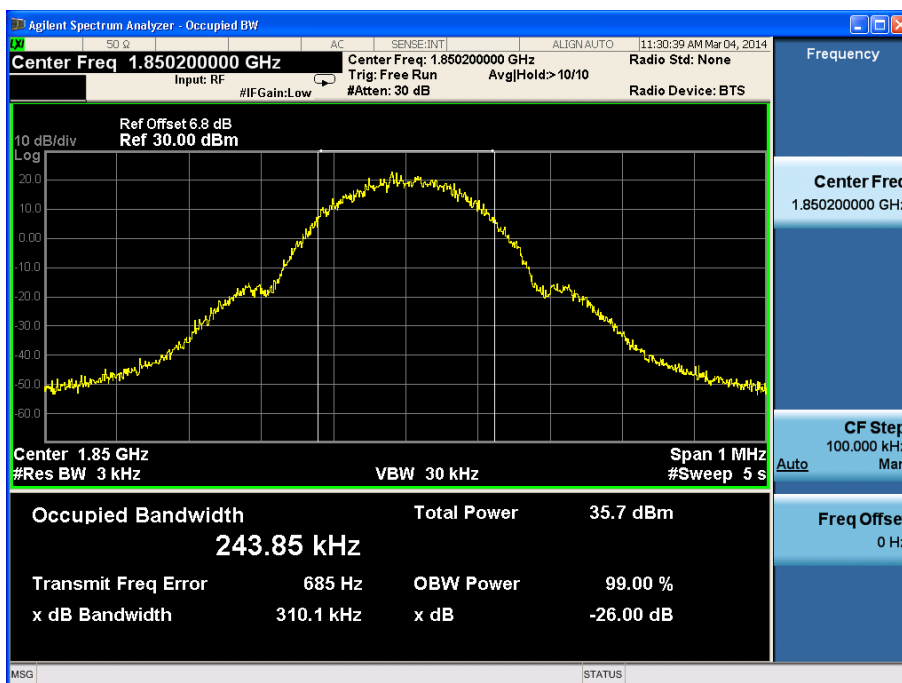

Channel 512

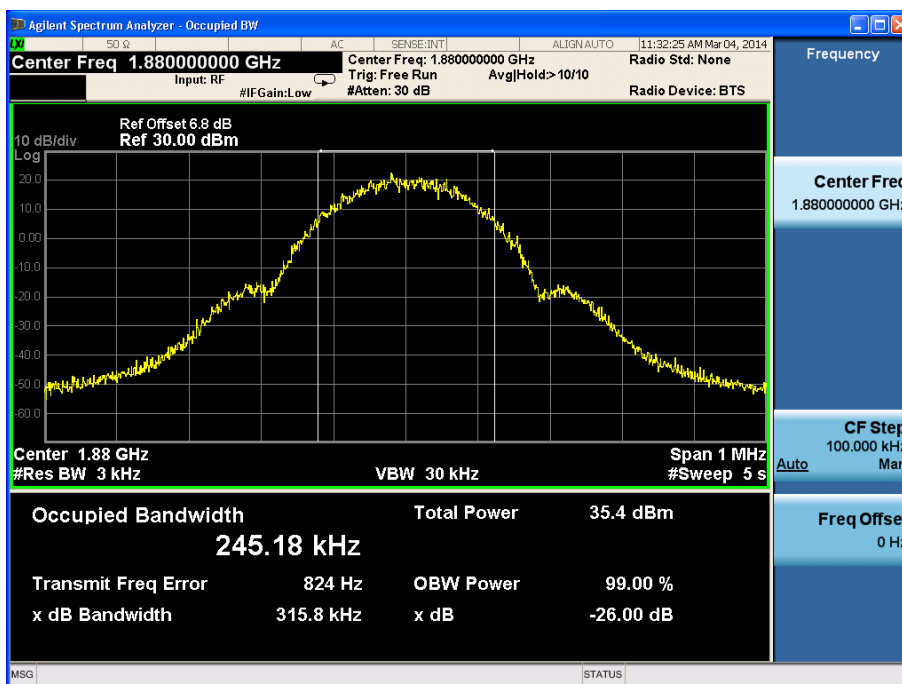

Channel 661

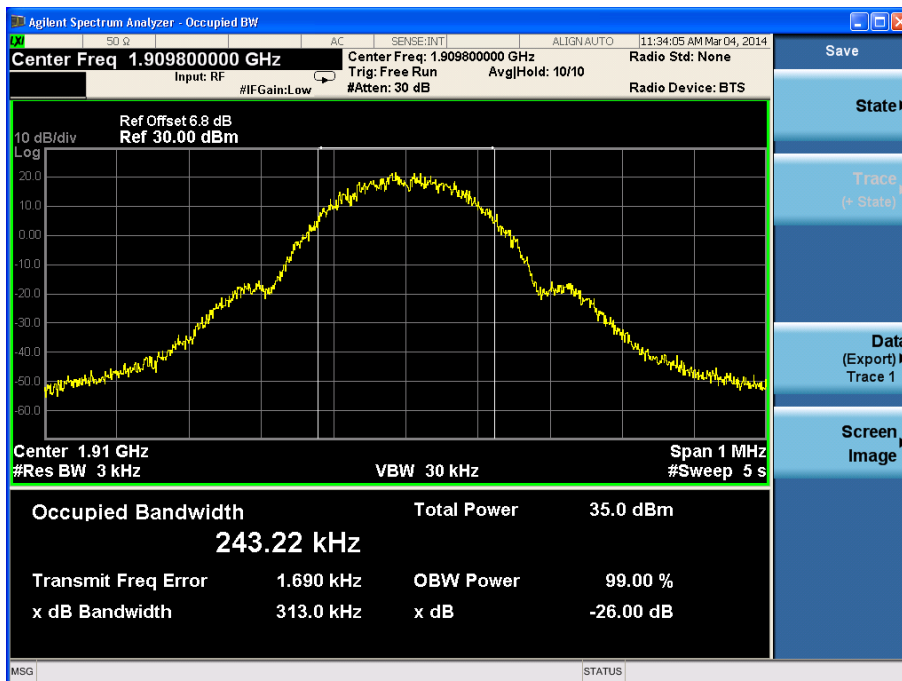

Channel 810




### 2.2.2.4 Emission Bandwidth-FCC Part24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

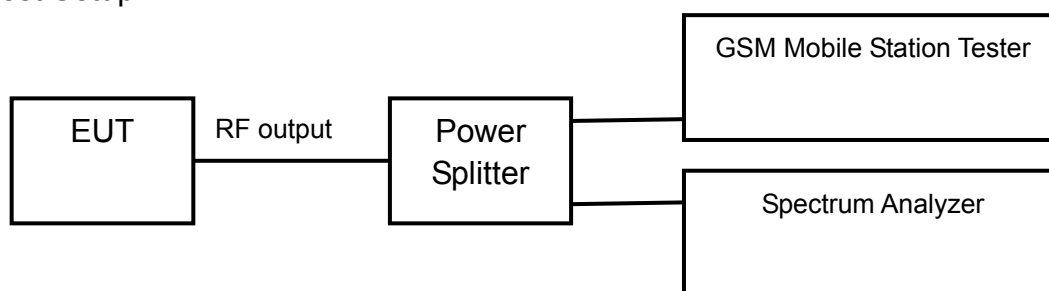

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of -26dB transmitter power can be read on spectrum analyzer.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits: No specific emission bandwidth requirements in part 24.238(b)

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
1850.2	512	309.8
1880.0	661	314.8
1909.8	810	311.7

EDGE (GMSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power (kHz)
1850.2	512	310.1
1880.0	661	315.8
1909.8	810	313.0

### 2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

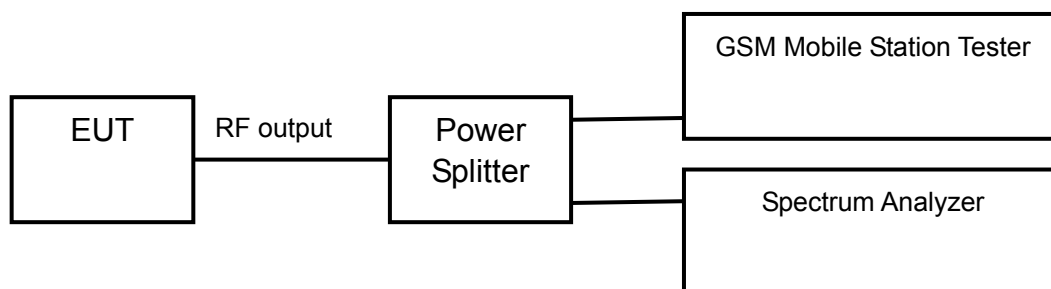

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No661 (middle channel of PCS1900 band)

Limits	≤-13dBm


Test result:

Refer to the following figures.

GSM/GPRS MODE:

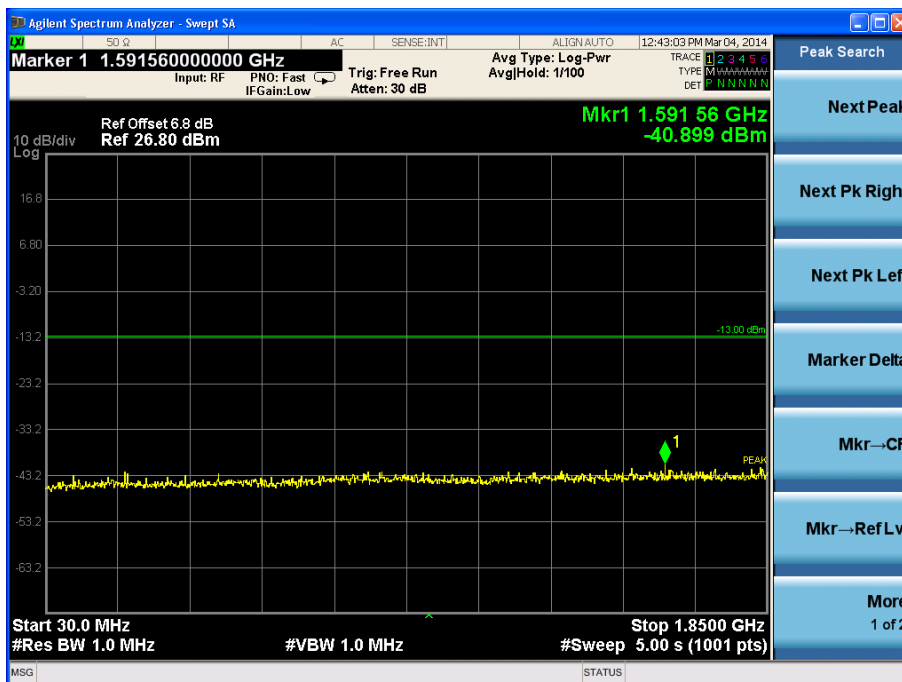

Channel 661, 30MHz~1850MHz

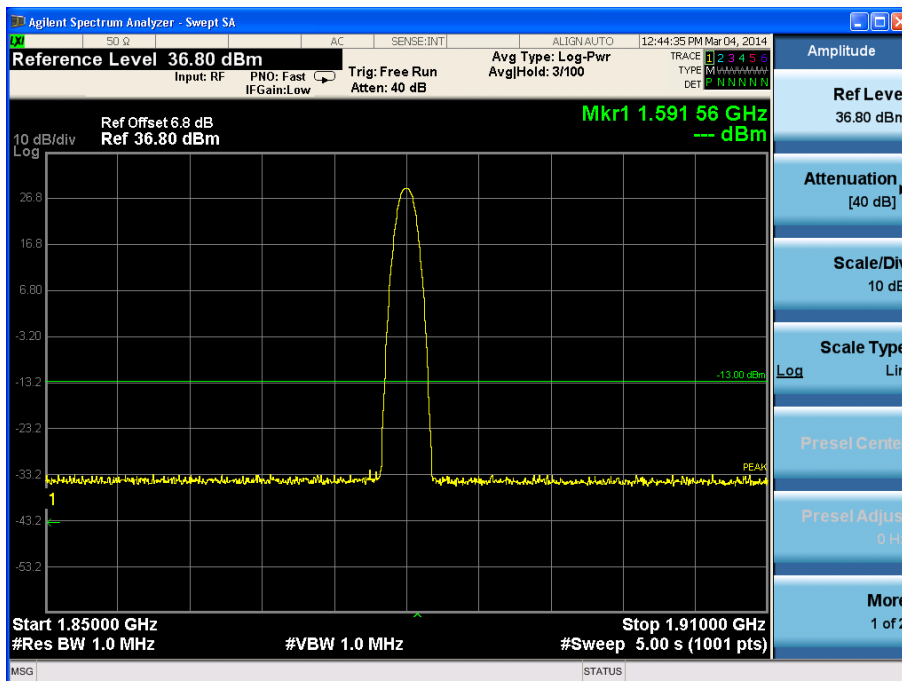


Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 661, 1910MHz~20GHz

EDGE (GMSK) MODE:

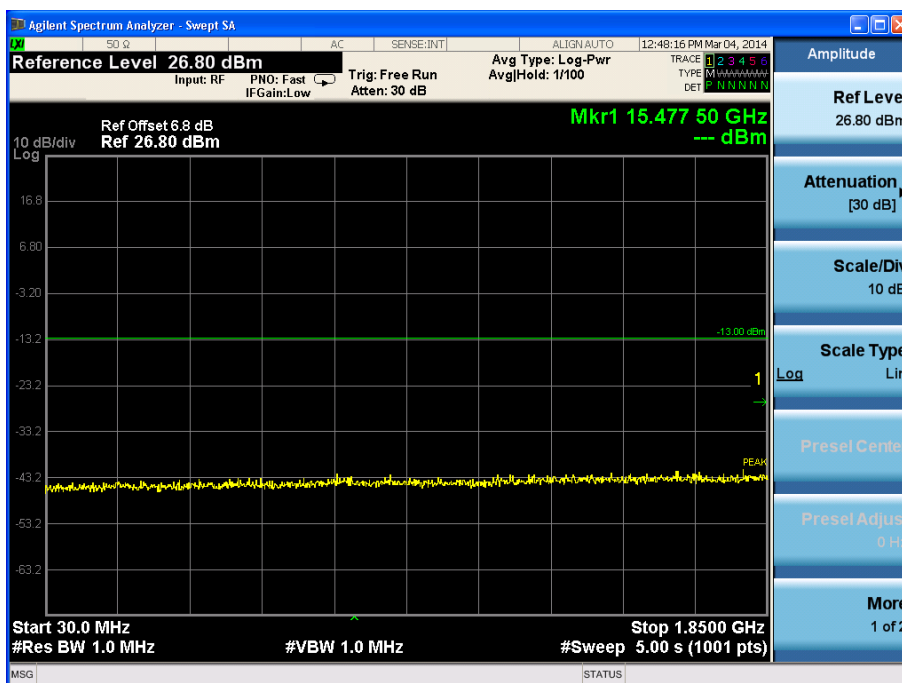


Channel 661, 30MHz~1850MHz

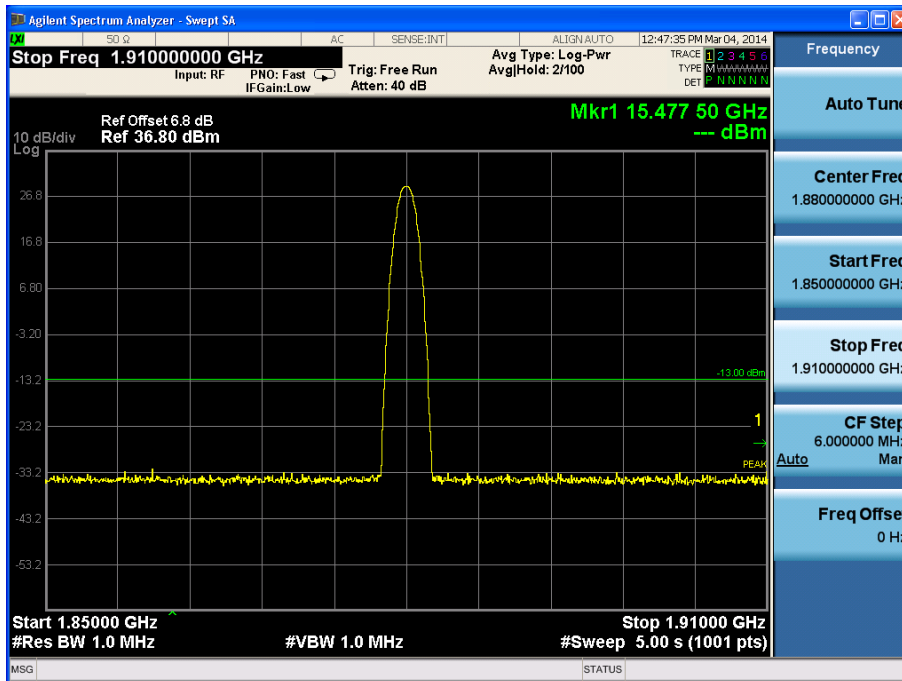

Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

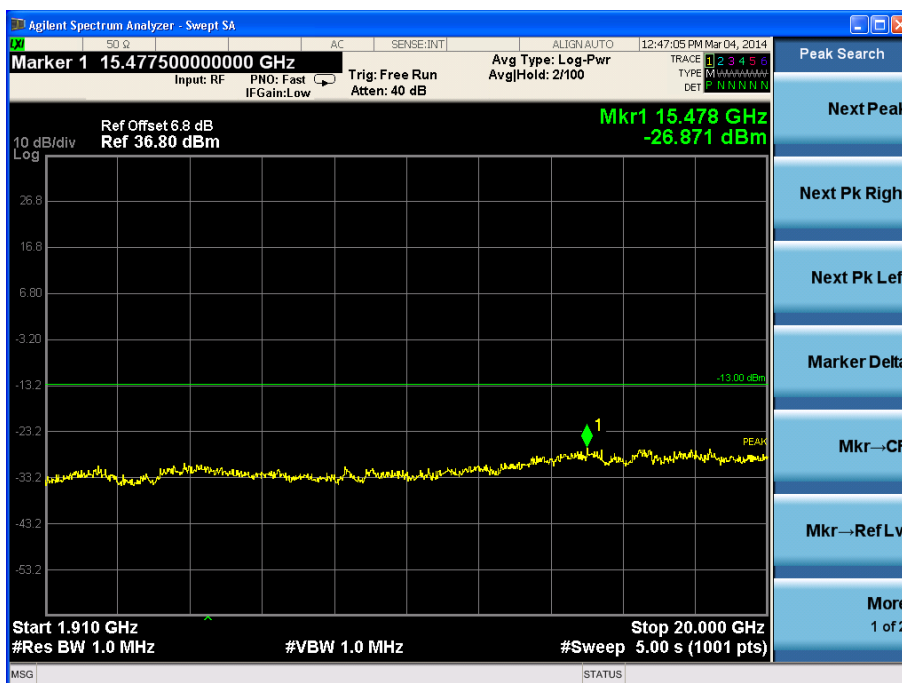


Channel 661, 1910MHz~20GHz

### 2.2.2.6 Band Edges Compliance-FCC Part2.1051/24.238(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

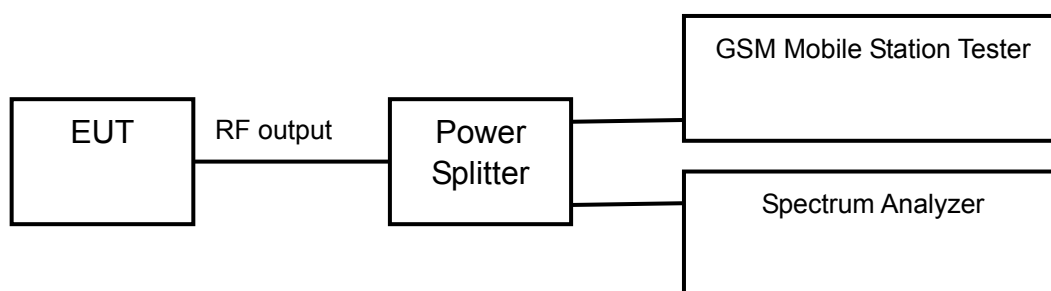

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No512 and No810 (Bottom and top channels of PCS1900 band)

Limits	$\leq -13\text{dBm}$
--------	----------------------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

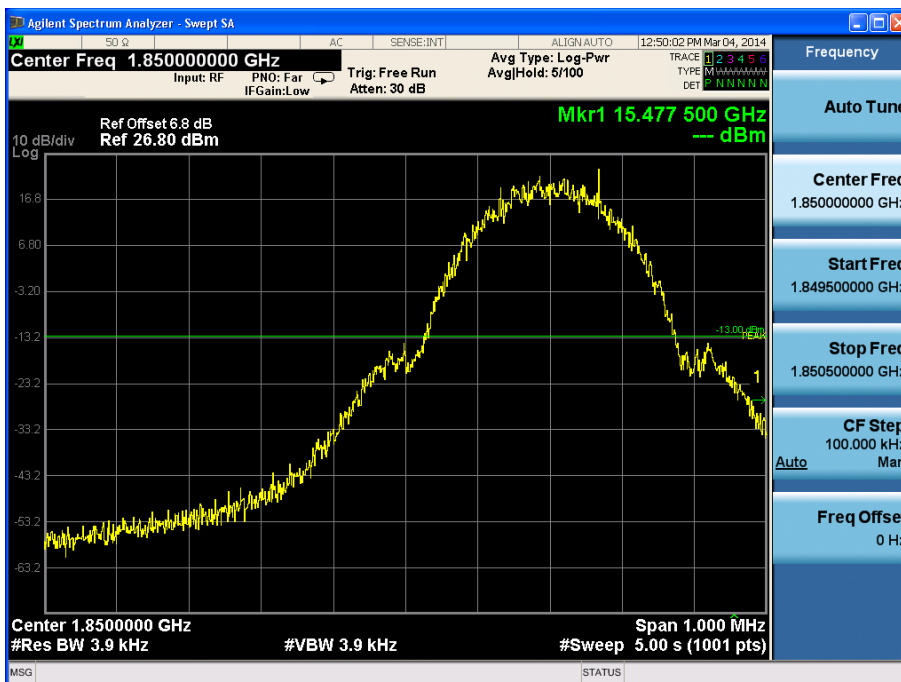


Channel 512

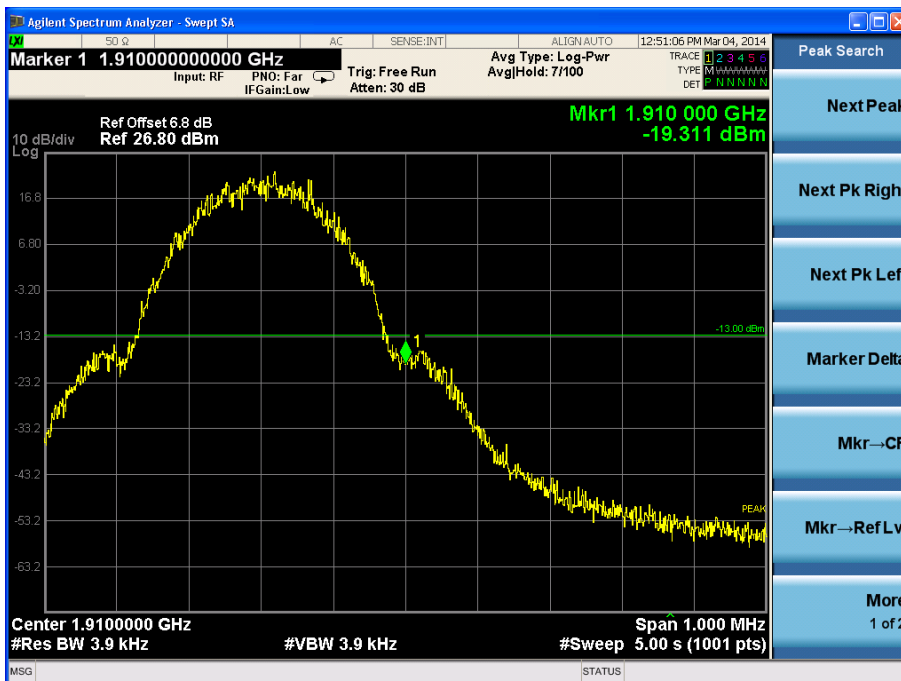


Channel 810

EDGE (GMSK) MODE:

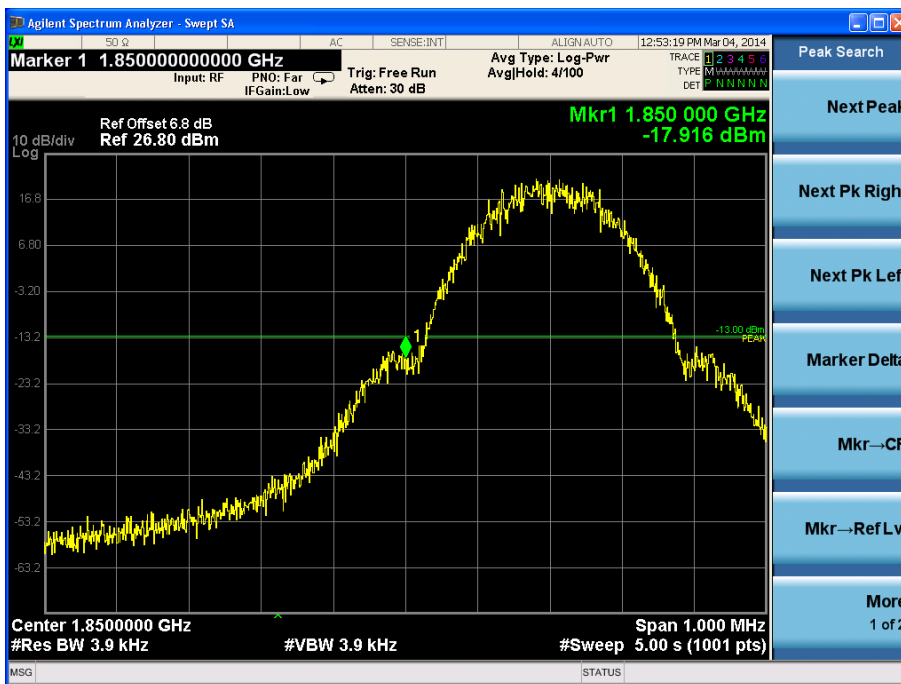

Channel 512

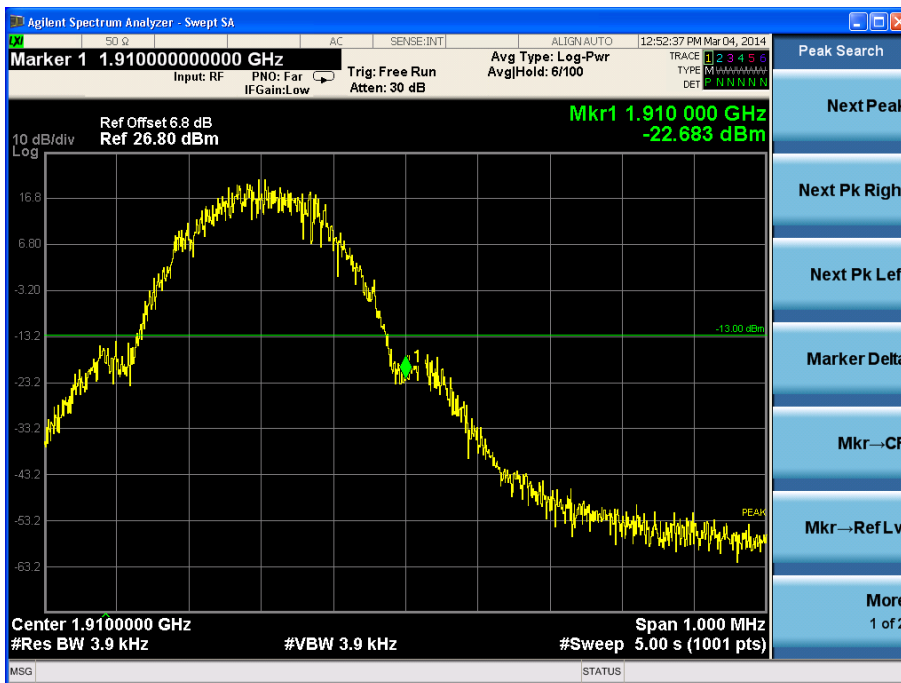

Channel 810




### 2.2.2.7 Frequency Stability-FCC Part2.1055/24.235

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

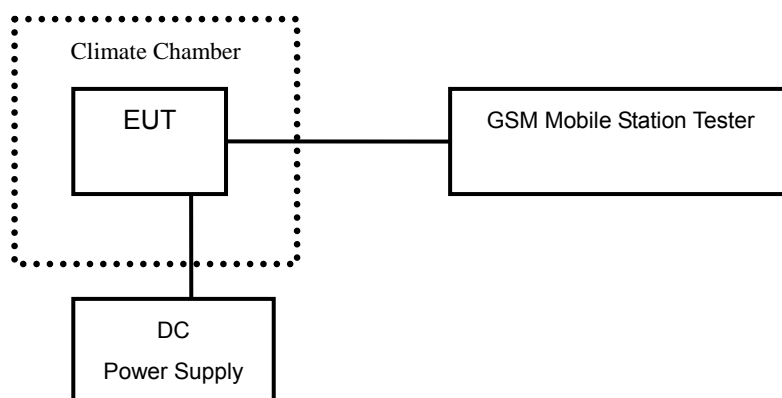

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.35V. The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band).

Limits: No specific frequency stability requirements in part 2.1055 and part 24.235.

Test result:

GSM/GPRS MODE:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 512	Channel 661	Channel 810
-30	0.012	0.013	0.012
-20	0.013	0.012	0.013
-10	0.012	0.013	0.014
0	0.013	0.013	0.013
+10	0.014	0.013	0.014
+20	0.015	0.014	0.015
+30	0.014	0.013	0.014
+40	0.013	0.013	0.013
+50	0.013	0.014	0.013

Voltage (V)	Test Result (ppm)@20°C		
	Channel 512	Channel 661	Channel 810
3.5	0.011	0.013	0.015
4.35	0.010	0.014	0.014

EDGE (GMSK) MODE:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 512	Channel 661	Channel 810
-30	0.012	0.011	0.012
-20	0.011	0.011	0.011
-10	0.010	0.012	0.011
0	0.011	0.011	0.012
+10	0.012	0.011	0.011
+20	0.011	0.011	0.012
+30	0.011	0.011	0.011
+40	0.011	0.012	0.011
+50	0.012	0.011	0.012


Voltage (V)	Test Result (ppm)@20°C		
	Channel 512	Channel 661	Channel 810
3.5	0.012	0.011	0.014
4.35	0.012	0.012	0.013

### 2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/24.238(a)


Ambient condition

Temperature	Relative humidity	Pressure
19.3°C	41.3%	100.7kPa

Test Setup:

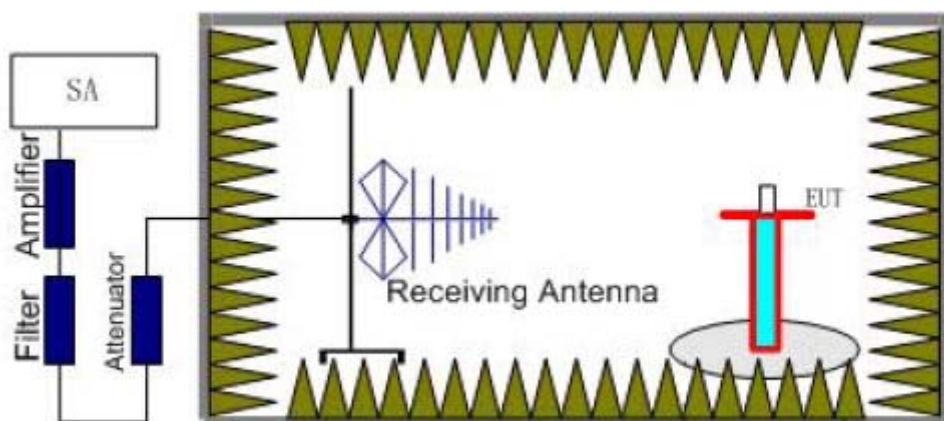

Step 1

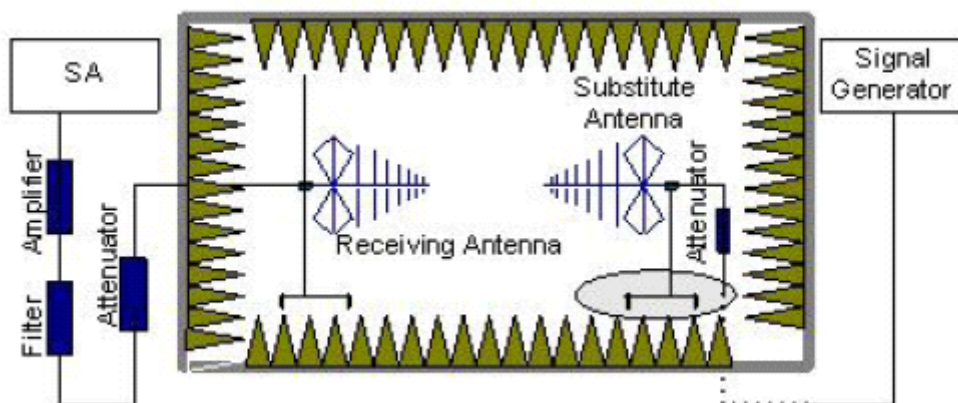

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed

on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15$  (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 512), middle (Channel 661) and top (Channel 810) channels of PCS 1900 band.

Test result:

GSM/GPRS MODE Channel 512:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2843.63	-53.5	-5.8	8.9	-56.6	-13	Vertical
2852.45	-53.4	-5.8	8.9	-56.5	-13	Vertical
3655.75	-54.2	-7.9	10.4	-56.7	-13	Horizontal
6987.25	-54.7	-9.4	12.0	-57.3	-13	Vertical
7568.54	-55.3	-10.8	12.0	-56.5	-13	Vertical
17365.13	-55.8	-13.9	12.3	-54.2	-13	Vertical

EDGE (GMSK) MODE Channel 512:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2875.32	-53.3	-5.8	8.9	-56.4	-13	Vertical
2894.34	-53.5	-5.8	8.9	-56.6	-13	Vertical
3682.62	-54.2	-7.9	10.4	-56.7	-13	Vertical
6988.56	-54.6	-9.4	12.0	-57.2	-13	Vertical
7546.76	-55.5	-10.8	12.0	-56.7	-13	Vertical
17335.56	-56.4	-13.9	12.3	-54.8	-13	Vertical

GSM/GPRS MODE Channel 661:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2834.63	-52.6	-5.8	8.9	-55.7	-13	Vertical
2906.45	-53.4	-5.8	8.9	-56.5	-13	Vertical
3724.78	-53.6	-7.9	10.4	-56.1	-13	Vertical
6986.34	-54.3	-9.4	12.0	-56.9	-13	Vertical
7567.26	-54.7	-10.8	12.0	-55.9	-13	Vertical
17355.62	-55.7	-13.9	12.3	-54.1	-13	Vertical

EDGE (GMSK) MODE Channel 661:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2813.63	-53.4	-5.8	8.9	-56.5	-13	Vertical
2854.52	-53.1	-5.8	8.9	-56.2	-13	Horizontal
3776.54	-53.6	-7.9	10.4	-56.1	-13	Vertical
6965.62	-54.5	-9.4	12.0	-57.1	-13	Vertical
7537.56	-55.4	-10.8	12.0	-56.6	-13	Vertical
17373.42	-56.4	-13.9	12.3	-54.8	-13	Vertical

GSM/GPRS MODE Channel 810:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2834.57	-52.3	-5.8	8.9	-55.4	-13	Vertical
2874.35	-52.8	-5.8	8.9	-55.9	-13	Vertical
3767.18	-53.4	-7.9	10.4	-55.9	-13	Vertical
6984.87	-54.5	-9.4	12.0	-57.1	-13	Vertical
7532.58	-55.3	-10.8	12.0	-56.5	-13	Horizontal
17318.83	-56.1	-13.9	12.3	-54.5	-13	Vertical

EDGE (GMSK) MODE Channel 810:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2843.92	-52.6	-5.8	8.9	-55.7	-13	Vertical
2875.42	-53.1	-5.8	8.9	-56.2	-13	Vertical
3784.63	-53.8	-7.9	10.4	-56.3	-13	Vertical
6998.73	-54.3	-9.4	12.0	-56.9	-13	Vertical
7567.87	-55.6	-10.8	12.0	-56.8	-13	Horizontal
17376.55	-56.4	-13.9	12.3	-54.8	-13	Vertical

### 2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	MY48367401	2014.8
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2014.8
3	DC Power Supply E3645A	Agilent	MY40000740	2014.8
4	Power Splitter 11850C	Agilent	026057	2014.8
5	Temperature chamber SH241	ESPEC	92000390	2014.8
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	----	----
7	Turn table Diameter:1m	HD	----	----
8	Antenna master FAC(MA4.0)	MATURO	----	----
9	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2014.8
10	HL562 Ultra log antenna	R&S	100016	2014.8
11	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2014.8
12	ESI 40 EMI test receiver	R&S	100015	2014.8
13	Radio tester	CMU 200	114667	2014.8



## Appendix

### Appendix1 Test Setup