



SAR TEST REPORT

No. 2013SAR00172

For

TCT Mobile Limited

HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 5 bands mobile phone

Mode Name: Diablo HD LTE EMEA 1.2GHz

Marketing Name: ONE TOUCH 6034R

With

Hardware Version: PIO1

Software Version: v1B28

FCC ID: RAD468

Issued Date: 2014-01-17



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

Revision Version

Report Number	Revision	Date	Memo
2013SAR00172	00	2014-01-13	Initial creation of test report
2013SAR00172	01	2014-01-17	Update the antenna location in section 12.2 on page 35

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT	5
1.3 PROJECT DATA.....	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT.....	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	18
8.1 SYSTEM SETUP	18
8.2 SYSTEM VERIFICATION.....	19
9 MEASUREMENT PROCEDURES	20
9.1 TESTS TO BE PERFORMED.....	20
9.2 GENERAL MEASUREMENT PROCEDURE	22
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR.....	23
9.4 SAR MEASUREMENT FOR LTE	24
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	24
9.6 POWER DRIFT	25
10 AREA SCAN BASED 1-G SAR.....	25
10.1 REQUIREMENT OF KDB.....	25
10.2 FAST SAR ALGORITHMS.....	25
11 CONDUCTED OUTPUT POWER	26

11.1 MANUFACTURING TOLERANCE	26
11.2 GSM MEASUREMENT RESULT	29
11.3 WCDMA MEASUREMENT RESULT	31
11.4 LTE MEASUREMENT RESULT	31
11.5 WI-FI AND BT MEASUREMENT RESULT	33
12 SIMULTANEOUS TX SAR CONSIDERATIONS	35
12.1 INTRODUCTION	35
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	35
12.3 SAR MEASUREMENT POSITIONS	36
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	36
13 EVALUATION OF SIMULTANEOUS	37
14 SAR TEST RESULT	38
14.1 THE EVALUATION OF MULTI-BATTERIES	38
14.2 SAR RESULTS FOR FAST SAR	39
14.3 SAR RESULTS FOR STANDARD PROCEDURE	45
15 SAR MEASUREMENT VARIABILITY	47
16 MEASUREMENT UNCERTAINTY	48
17 MAIN TEST INSTRUMENTS	52
ANNEX A GRAPH RESULTS	53
ANNEX B SYSTEM VERIFICATION RESULTS	77
ANNEX C SAR MEASUREMENT SETUP	90
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	96
ANNEX E EQUIVALENT MEDIA RECIPES	99
ANNEX F SYSTEM VALIDATION	100
ANNEX G PROBE CALIBRATION CERTIFICATE	101
ANNEX H DIPOLE CALIBRATION CERTIFICATE	112

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P.R.China
Postal Code: 100191
Telephone: +86-10-62304633
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω
Ambient noise & Reflection: < 0.012 W/kg


1.3 Project Data

Project Leader: Qi Dianyuan
Test Engineer: Lin Xiaojun
Testing Start Date: September 28, 2013
Testing End Date: January 8, 2014

1.4 Signature



Lin Xiaojun
(Prepared this test report)

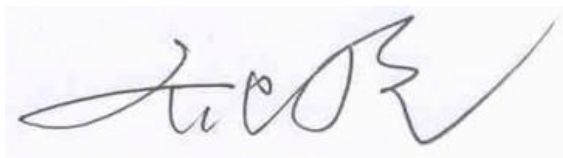

Qi Dianyuan
(Reviewed this test report)



Xiao Li
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.2013SAR00137. According to the client request, we quote the test results of original report except LTE Band7 and perform the measurement for LTE Band7.

The maximum results of Specific Absorption Rate (SAR) found during testing for TCT Mobile Limited HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 5 bands mobile phone Diablo HD LTE EMEA 1.2GHz / ONE TOUCH 6034R are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.32	PCE
	PCS 1900	0.47	
	UMTS FDD 5	0.33	
	LTE Band 7	0.39	
	WLAN 2.4&5.8 GHz	0.39	DTS
	WLAN 5 GHz	0.69	UNII
Body-worn (Separation Distance 10mm)	GSM 850	0.68	PCE
	PCS 1900	1.13	
	UMTS FDD 5	0.69	
	LTE Band 7	1.09	
	WLAN 2.4&5.8 GHz	0.34	DTS
	WLAN 5.0 GHz	0.20	UNII

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.13 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.47	0.69	1.16
Highest reported SAR value for Body	Front	1.13	0.11	1.24
	Rear	0.90	0.34	1.24

Table 2.3: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.47	0.15	0.62
Highest reported SAR value for Body	Front	1.13	0.07	1.20

BT* - Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.24 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

3 Client Information

3.1 Applicant Information

Company Name:	TCT Mobile Limited
Address /Post:	5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	ShangHai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@jrdcom.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

3.2 Manufacturer Information

Company Name:	TCT Mobile Limited
Address /Post:	5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	ShangHai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@jrdcom.com
Telephone:	0086-21-61460890
Fax:	0086-21-61460602

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	HSDPA/HSUPA/UMTS Tri bands / GSM quad bands/LTE 5 bands mobile phone
Mode Name:	Diablo HD LTE EMEA 1.2GHz
Marketing Name:	ONE TOUCH 6034R
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/900/2100 BT, Wi-Fi (2.4G&5G), LTE Band 1/3/7/8/20
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	2502.5 – 2567.5 MHz (LTE Band 7)
	2412 – 2462 MHz (Wi-Fi 2.4G)
5180 – 5825 MHz (Wi-Fi 5G)	
GPRS/EGPRS Multislot Class:	12
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	013913000100379	PIO	V1B2T
EUT2	013913000100304	PIO	V1B2T
EUT3	013913000100122	PIO	V1B2T
EUT4	862780020000125	PIO1	v1B28

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&4 and conducted power with the EUT2&3.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAC2000005C2	/	SCUD
AE2	Battery	CAC2000008C1	/	BYD
AE3	Headset	CCB3001A15C1	/	Lianyun
AE4	Headset	CCB3001A15C2	/	Juwei
AE5	Headset	CCB3001A14C1	/	Lianyun
AE6	Headset	CCB3001A14C2	/	Juwei

*AE ID: is used to identify the test sample in the lab internally.

Note: AE3 is same as AE5. AE4 is same as AE6. So they can use the same results

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

KDB447498 D01: General RF Exposure Guidance v05r01: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r01: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D05 SAR for LTE Devices v02r02: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v01r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227: SAR measurement procedures for 802.112abg transmitters

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r01: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.06~40.96
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1
5200	Head	4.66	4.43~4.89	35.99	34.19~37.79
5200	Body	5.30	5.04~5.56	49.0	46.6~51.4
5800	Head	5.27	5.01~5.53	35.3	33.5~37.1
5800	Body	6.00	5.70~6.30	48.2	45.8~50.6

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2013-10-02	Head	835 MHz	40.28	-2.94	0.896	-0.44
	Body	835 MHz	56.51	2.37	0.976	0.62
2013-10-03	Head	1900 MHz	39.29	-1.78	1.418	1.29
	Body	1900 MHz	52.34	-1.80	1.537	1.12
2013-09-28	Head	2450 MHz	38.41	-2.02	1.824	1.33
	Body	2450 MHz	53.28	1.10	1.973	1.18
2013-10-01	Head	5200 MHz	36.64	1.81	4.581	-1.70
	Body	5200 MHz	50.62	3.31	5.178	-2.30
	Head	5800 MHz	35.34	0.11	5.377	2.03
	Body	5800 MHz	49.31	2.30	6.138	2.30
2014-01-08	Head	2600 MHz	38.34	-1.72	1.985	1.28
	Body	2600 MHz	52.98	0.34	2.174	0.65


Note: The liquid temperature is 22.0 °C

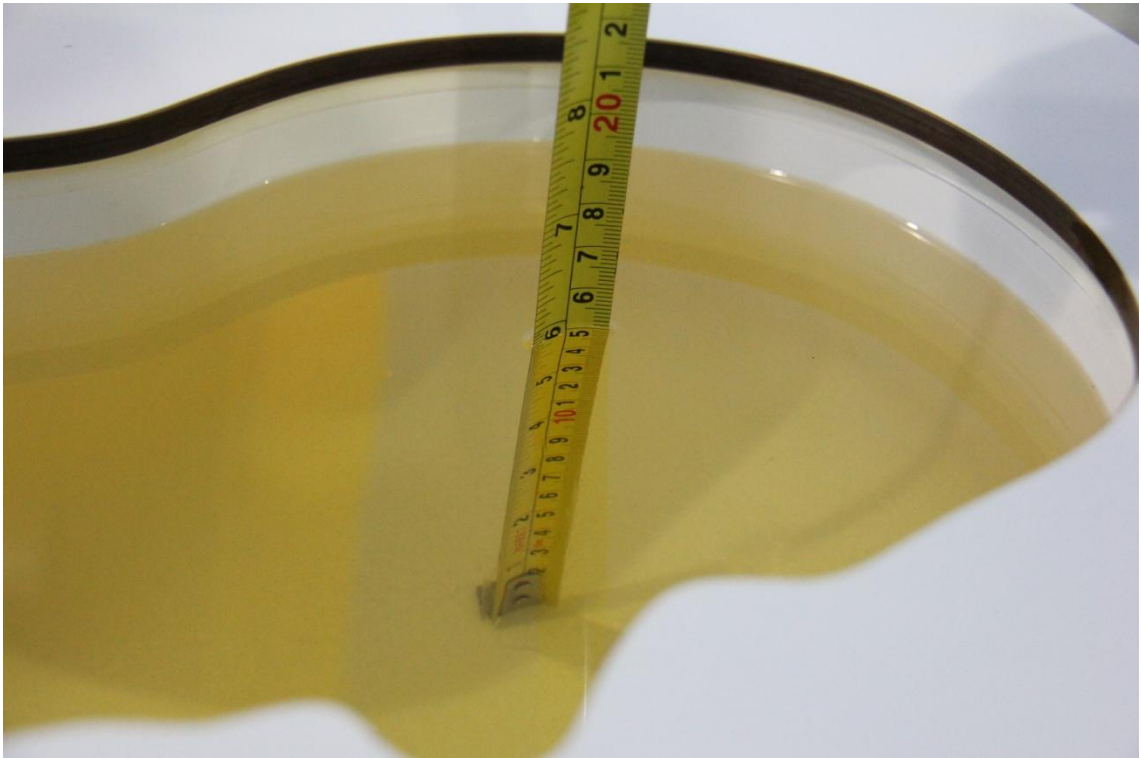


Picture 7-1: Liquid depth in the Head Phantom (835 MHz)

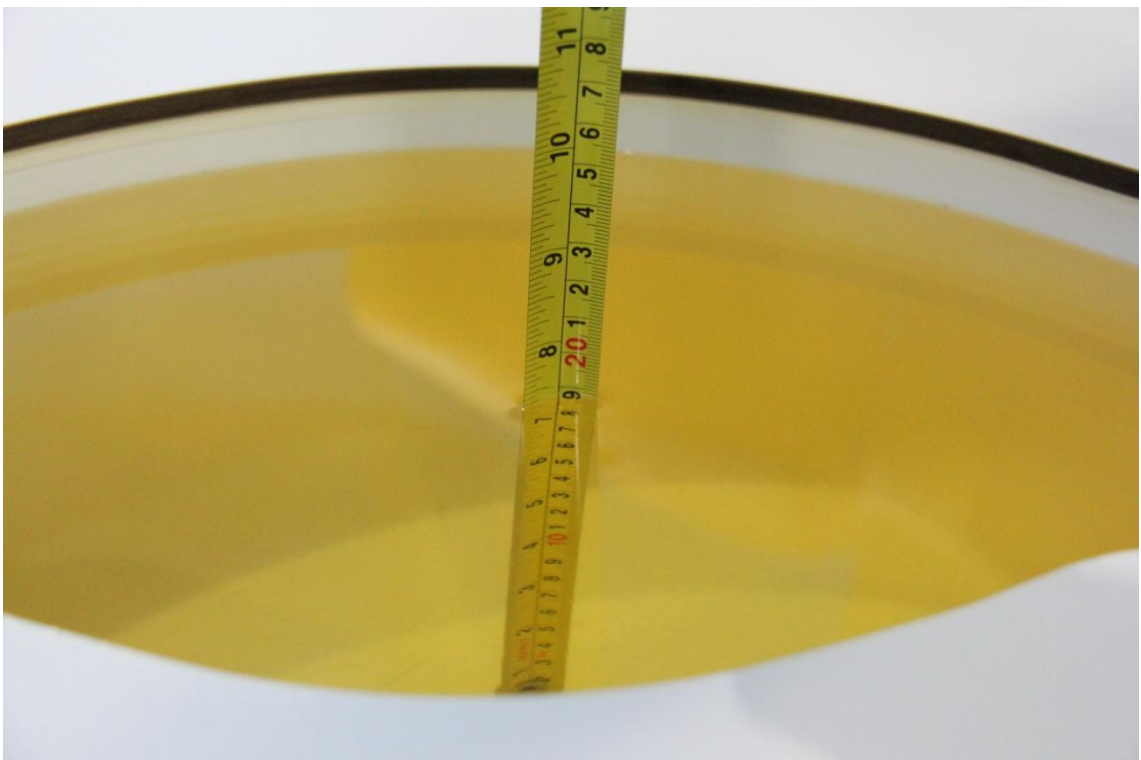


Picture 7-2: Liquid depth in the Flat Phantom (835 MHz)

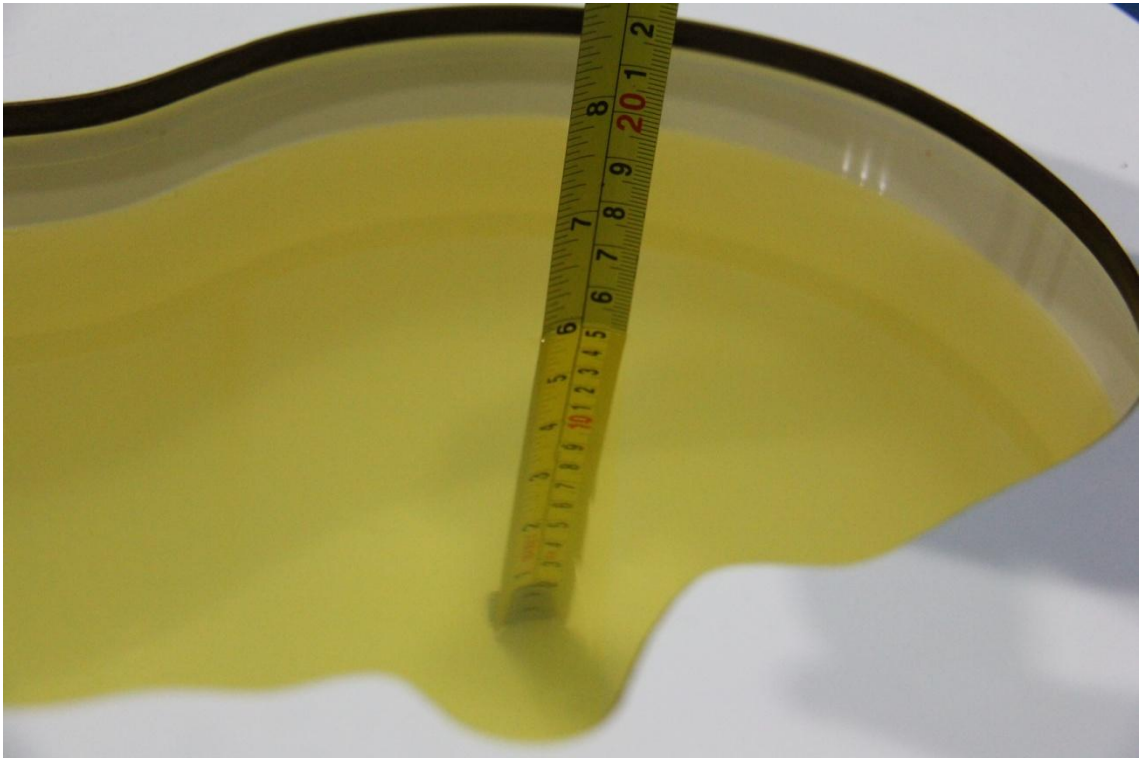


Picture 7-3: Liquid depth in the Head Phantom (1900 MHz)

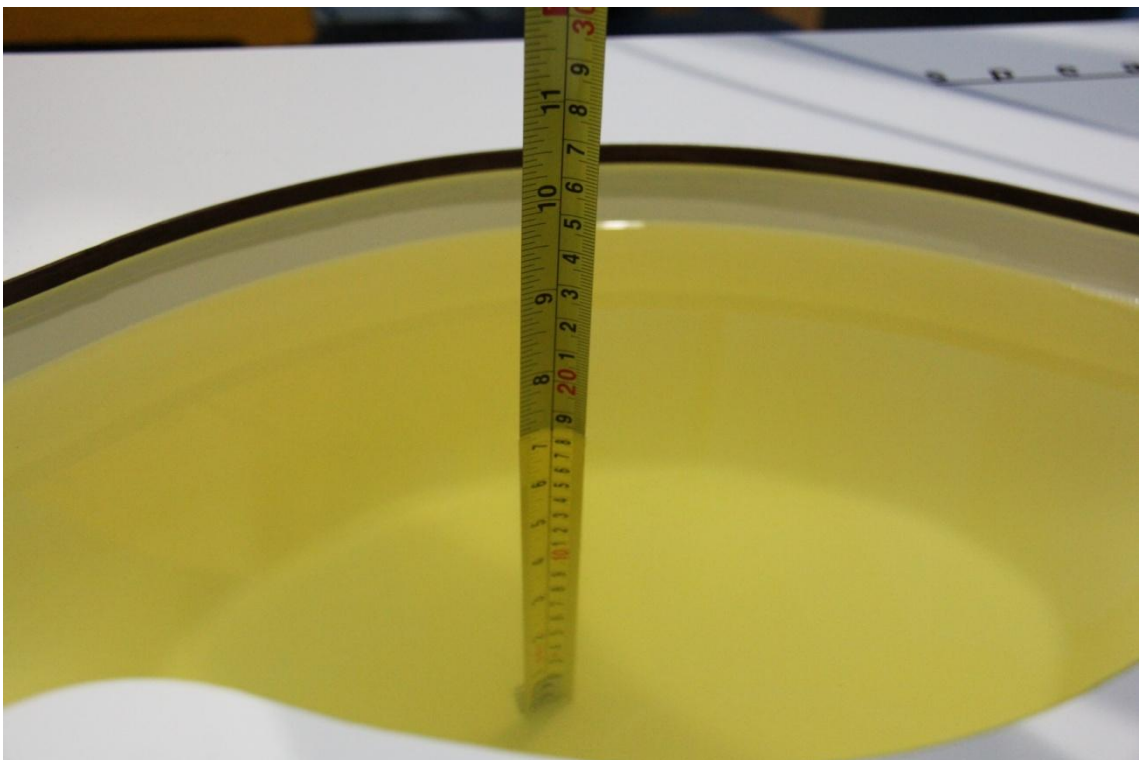


Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)

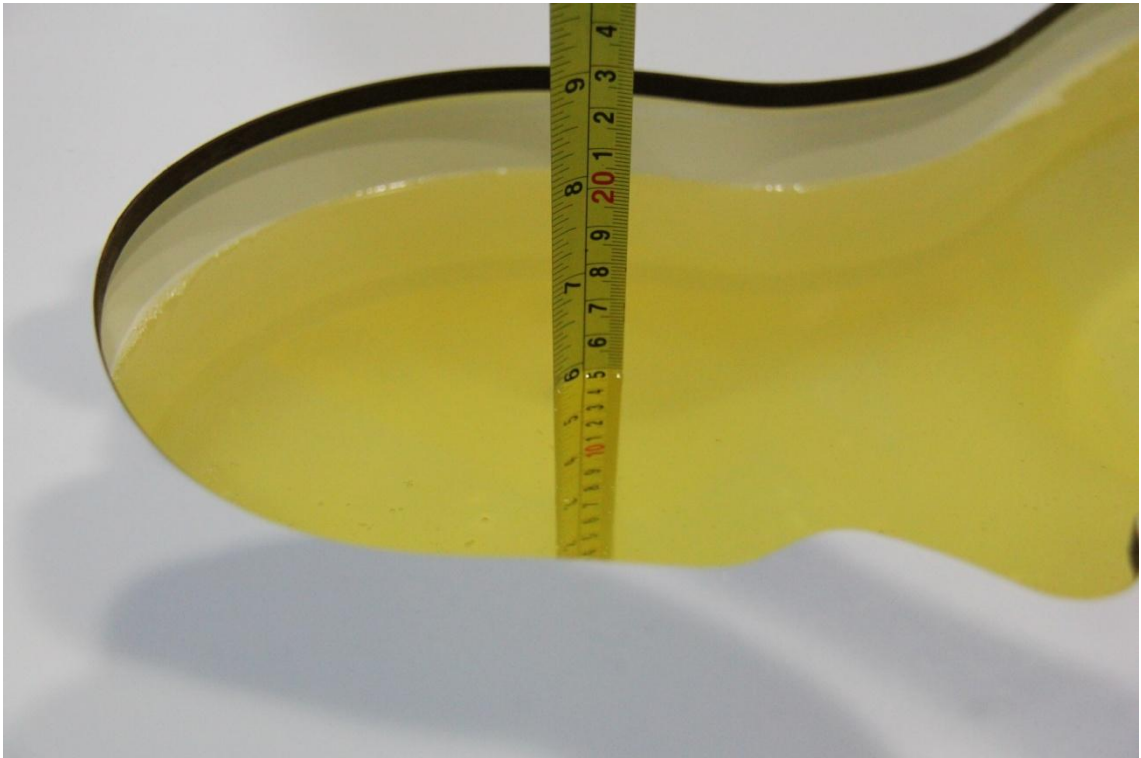


Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

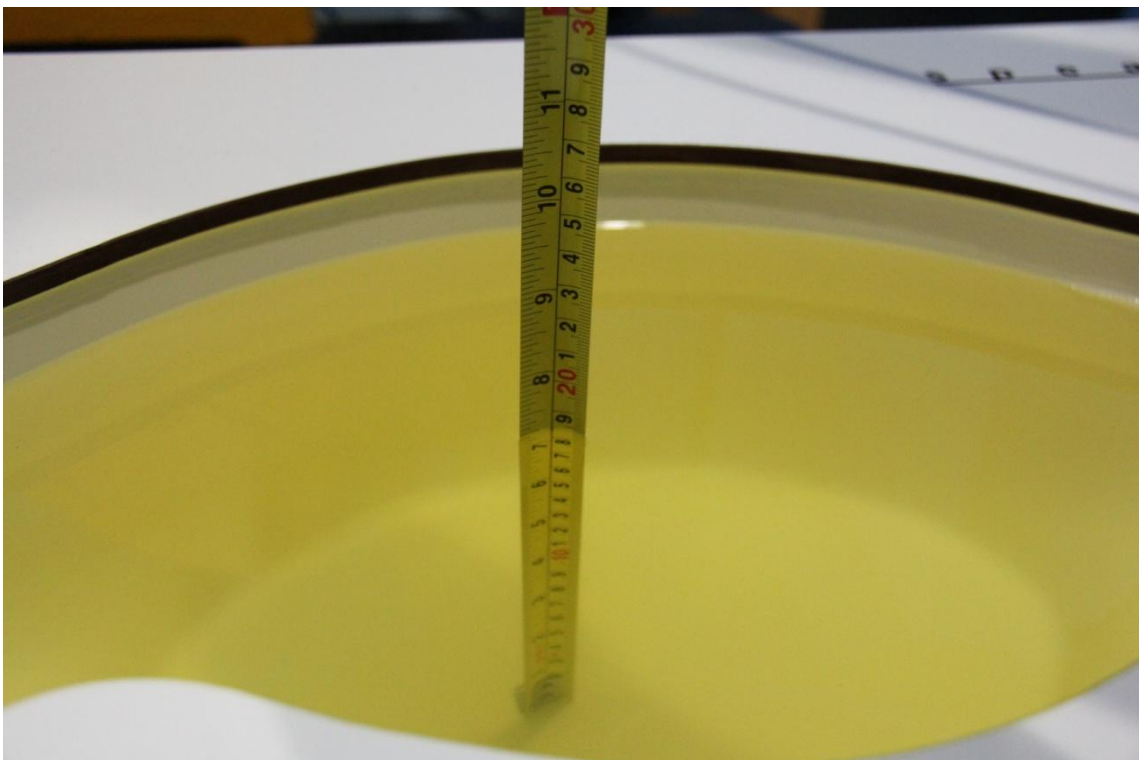

Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)

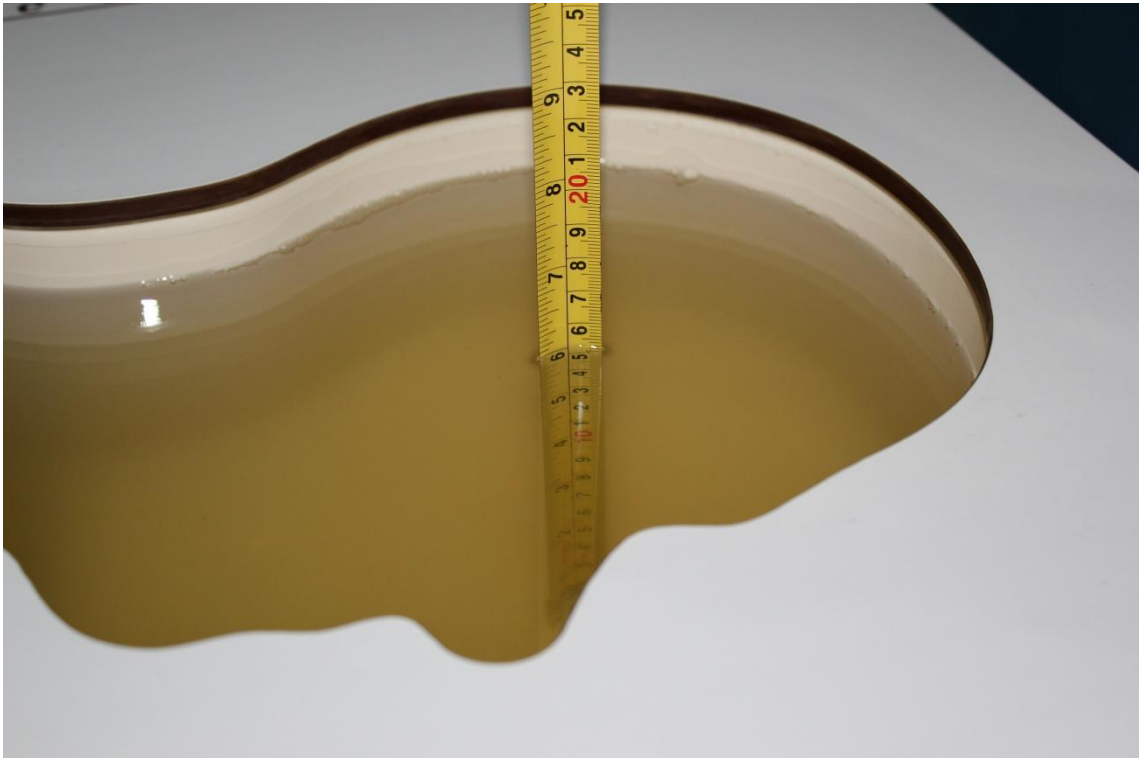

Picture 7-7 Liquid depth in the Head Phantom (2600 MHz Head)

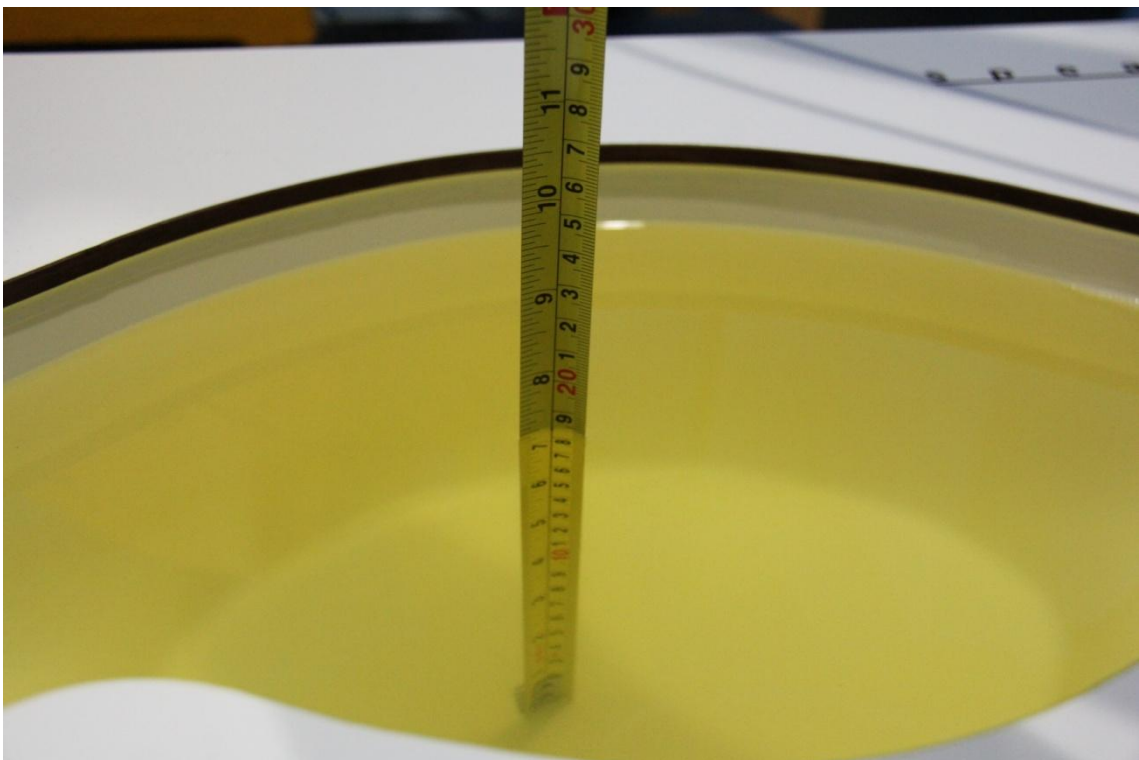

Picture 7-8 Liquid depth in the Flat Phantom (2600MHz)



Picture 7-9 Liquid depth in the Head Phantom (5GHz)




Picture 7-10 Liquid depth in the Flat Phantom (5GHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

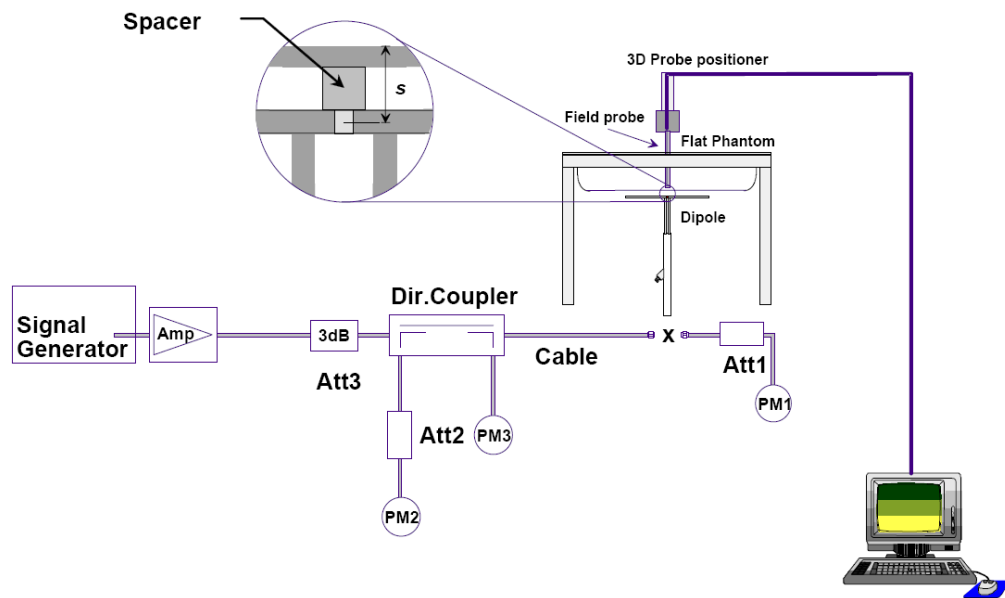

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-10-02	835 MHz	6.16	9.44	6.00	9.24	-2.60%	-2.12%
2013-10-03	1900 MHz	21.3	40.4	20.96	39.52	-1.60%	-2.18%
2013-09-28	2450 MHz	24.9	53.4	24.28	51.60	-2.49%	-3.37%
2013-10-01	5200 MHz	22.8	79.7	23.30	81.50	2.19%	2.26%
	5800 MHz	22.2	78.2	21.50	77.40	-3.15%	-1.02%
2014-01-08	2600 MHz	25.8	58.0	26.16	57.20	1.40%	-1.38%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2013-10-02	835 MHz	6.20	9.40	6.32	9.56	1.94%	1.70%
2013-10-03	1900 MHz	21.9	41.3	21.60	40.80	-1.37%	-1.21%
2013-09-28	2450 MHz	23.4	50.4	23.92	51.20	2.22%	1.59%
2013-10-01	5200 MHz	21.0	74.9	20.50	73.40	-2.38%	-2.00%
	5800 MHz	20.5	74.5	21.30	75.20	3.90%	0.94%
2014-01-08	2600 MHz	24.8	56.1	25.56	57.60	3.06%	2.67%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

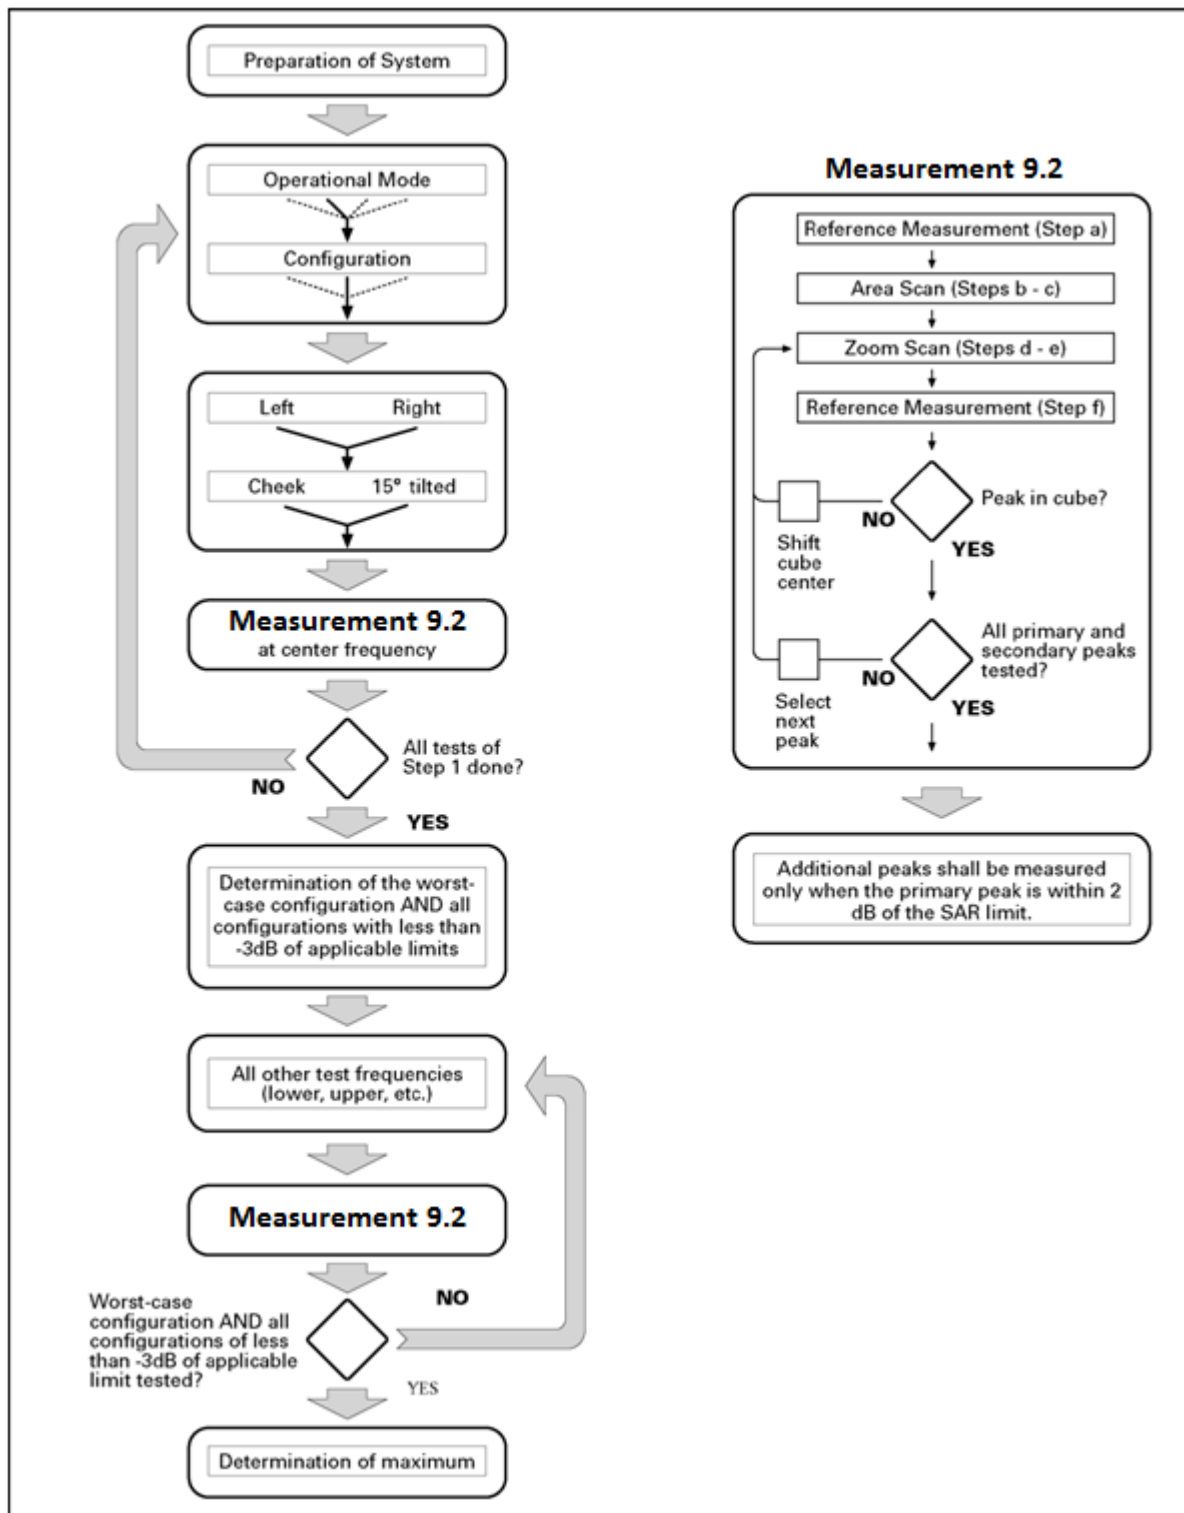

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.29 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	33	33	33
Tune-up (dBm)	33.7	33.7	33.7
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.7	29.7	29.7
Tune-up (dBm)	30.7	30.7	30.7

Table 11.2: GPRS and EGPRS

GSM 850 GPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.9	32.5	32.5
	Tune-up (dBm)	33.6	33.2	33.2
2 Txslots	Target (dBm)	30.9	30.9	30.9
	Tune-up (dBm)	31.6	31.6	31.6
3 Txslots	Target (dBm)	28.9	28.9	28.9
	Tune-up (dBm)	29.6	29.6	29.6
4 Txslots	Target (dBm)	27.9	27.9	27.9
	Tune-up (dBm)	28.6	28.6	28.6
GSM 850 EGPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.8	32.5	32.5
	Tune-up (dBm)	33.5	33.2	33.2
2 Txslots	Target (dBm)	30.9	30.9	30.9
	Tune-up (dBm)	31.6	31.6	31.6
3 Txslots	Target (dBm)	28.9	28.9	28.9
	Tune-up (dBm)	29.6	29.6	29.6
4 Txslots	Target (dBm)	27.9	27.9	27.9
	Tune-up (dBm)	28.6	28.6	28.6
GSM 850 EGPRS (8PSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	27.4	27.3	27.1
	Tune-up (dBm)	28.1	28	27.8
2 Txslots	Target (dBm)	26.5	26.3	26.4
	Tune-up (dBm)	27.2	27	27.1
3 Txslots	Target (dBm)	24.5	24.3	24.4
	Tune-up (dBm)	25.2	25	25.1
4 Txslots	Target (dBm)	23.5	23.3	23.4
	Tune-up (dBm)	24.2	24	24.1

GSM 1900 GPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29	29.1	29.2
	Tune-up (dBm)	30	30.1	30.2
2 Txslots	Target (dBm)	26.5	26.3	26.4
	Tune-up (dBm)	27.5	27.3	27.4
3 Txslots	Target (dBm)	24.7	24.5	24.6
	Tune-up (dBm)	25.7	25.5	25.6
4 Txslots	Target (dBm)	23.5	23.3	23.4
	Tune-up (dBm)	24.5	24.3	24.4
GSM 1900 EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	28.9	29	29.1
	Tune-up (dBm)	29.9	30	30.1
2 Txslots	Target (dBm)	26.5	26.4	26.4
	Tune-up (dBm)	27.5	27.4	27.4
3 Txslots	Target (dBm)	24.7	24.5	24.6
	Tune-up (dBm)	25.7	25.5	25.6
4 Txslots	Target (dBm)	23.5	23.3	23.4
	Tune-up (dBm)	24.5	24.3	24.4
GSM 1900 EGPRS (8PSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	25.6	25.5	25.8
	Tune-up (dBm)	26.6	26.5	26.8
2 Txslots	Target (dBm)	24.5	24.4	24.5
	Tune-up (dBm)	25.5	25.4	25.5
3 Txslots	Target (dBm)	22.5	22.4	22.5
	Tune-up (dBm)	23.5	23.4	23.5
4 Txslots	Target (dBm)	21.5	21.4	21.5
	Tune-up (dBm)	22.5	22.4	22.5

Table 11.3: WCDMA

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23.5	23.5	23.5
Tune-up (dBm)	24.2	24.2	24.2
HSUPA (sub-test 1)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.0	21.7	21.5
Tune-up (dBm)	22.7	22.5	22.5
HSUPA (sub-test 2)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.1	21.1	21.0
Tune-up (dBm)	22.0	22.0	22.0

HSUPA (sub-test 3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	20.6	20.9	20.8
Tune-up (dBm)	22.0	22.2	21.8
HSUPA (sub-test 4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.1	21.5	21.5
Tune-up (dBm)	22.4	22.2	22.2
HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.5	22.2	22.2
Tune-up (dBm)	23.2	23.2	22.9
DC-HSDPA (sub-test 1)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.1	22.1	22.1
Tune-up (dBm)	22.8	22.8	22.8
DC-HSDPA (sub-test 2)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.1	22.2	22.1
Tune-up (dBm)	22.8	22.9	22.8
DC-HSDPA (sub-test 3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.7	21.8	21.7
Tune-up (dBm)	22.4	22.5	22.4
DC-HSDPA (sub-test 4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21.7	21.8	21.7
Tune-up (dBm)	22.4	22.5	22.4

Table 11.4: LTE

Band	Mode	BW (MHz)	RB allocation	Target (dBm)	Tune-up (dBm)
LTE Band 7	QPSK	5, 10, 15, 20	1&50%&100%	20.8	21.5
	16QAM	5	1&50%&100%	19.8	20.5
			1	20.5	21.5
		10	50%&100%	19.3	20.0
			1	20.5	21.5
		15	50%&100%	19.3	20.0
			1	20.3	21.0
	20	50%&100%	19.3	20.0	

Table 11.5: Bluetooth

Bluetooth (GFSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	4	4	3
Tune-up (dBm)	5.5	5.5	4.5
Bluetooth (DQPSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	2.5	3.5	1.5
Tune-up (dBm)	4	5	3
Bluetooth (8DPSK)			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	2.5	3.5	1.5
Tune-up (dBm)	4	5	3

Table 11.6: WiFi

Band	Target (dBm)	Tune-up (dBm)
802.11b (2.4GHz)	17.5	19.5
802.11g (2.4GHz)	14	16
802.11n HT20 (2.4GHz)	13	15
802.11a (5GHz) channel 36-48	12.5	14.5
802.11a (5GHz) channel 149-153	10.5	12.5
802.11a (5GHz) channel 157-165	11	13
802.11n HT20 (5GHz) channel 36-48	11.5	13.5
802.11n HT20 (5GHz) channel 149	9.5	11.5
802.11n HT20 (5GHz) channel 153-165	9.5	11.5
802.11n HT40 (5GHz) channel 38-46	12	14
802.11n HT40 (5GHz) channel 151	10	12
802.11n HT40 (5GHz) channel 159	10.5	12.5

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.7: The conducted power measurement results for GSM850/1900

GSM	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
850MHz	32.79	32.84	32.76
GSM	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
1900MHz	29.31	29.46	29.41

Table 11.8: The conducted power measurement results for GPRS and EGPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.82	32.80	32.77	-9.03dB	23.79	23.77	23.74
2 Txslots	30.72	30.89	30.95	-6.02dB	24.70	24.87	24.93
3Txslots	28.54	28.69	28.75	-4.26dB	24.28	24.43	24.49
4 Txslots	27.83	27.96	28.00	-3.01dB	24.82	24.95	24.99
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.79	32.86	32.76	-9.03dB	23.76	23.83	23.73
2 Txslots	30.66	30.83	30.87	-6.02dB	24.64	24.81	24.85
3Txslots	28.46	28.60	28.66	-4.26dB	24.20	24.34	24.40
4 Txslots	27.79	27.97	27.96	-3.01dB	24.78	24.96	24.95
GSM 850 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	27.18	27.23	27.21	-9.03dB	18.15	18.20	18.18
2 Txslots	25.49	25.51	25.42	-6.02dB	19.47	19.49	19.40
3Txslots	23.28	23.27	23.26	-4.26dB	19.02	19.01	19.00
4 Txslots	22.33	22.40	22.41	-3.01dB	19.32	19.39	19.40
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.34	29.49	29.44	-9.03dB	20.31	20.46	20.41
2 Txslots	26.68	26.62	26.65	-6.02dB	20.66	20.60	20.63
3Txslots	24.82	25.01	24.83	-4.26dB	20.56	20.75	20.57
4 Txslots	23.53	23.63	23.59	-3.01dB	20.52	20.62	20.58
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.34	29.49	29.45	-9.03dB	20.31	20.46	20.42
2 Txslots	26.70	26.63	26.56	-6.02dB	20.68	20.61	20.54
3Txslots	24.85	24.93	24.85	-4.26dB	20.59	20.67	20.59
4 Txslots	23.59	23.68	23.63	-3.01dB	20.58	20.67	20.62
PCS1900 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	25.98	26.07	26.05	-9.03dB	16.95	17.04	17.02
2 Txslots	24.83	24.94	24.74	-6.02dB	18.81	18.92	18.72
3Txslots	22.64	22.73	22.70	-4.26dB	18.38	18.47	18.44
4 Txslots	21.58	21.73	21.58	-3.01dB	18.57	18.72	18.57

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and 2/3/4Txslots for GSM1900.

Note: According to the KDB941225 D03, “when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used”.

11.3 WCDMA Measurement result

Table 11.9: The conducted Power for WCDMA850/1900

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	\	23.66	23.63	23.36
HSUPA	1	22.29	22.27	21.86
	2	21.90	21.85	21.28
	3	21.54	21.99	21.11
	4	22.20	21.99	21.79
	5	23.05	22.96	22.35
DC-HSDPA	1	21.93	21.98	22.00
	2	21.90	21.94	22.03
	3	21.87	21.99	22.03
	4	21.92	21.92	22.02

Note: HSUPA&DC-HSDPA body SAR for WCDMA850 are not required, because maximum average output power of each RF channel with HSUPA&DC-HSDPA active is not 1/4 dB higher than that measured without HSUPA&DC-HSDPA.

11.4 LTE Measurement result

Band 7				
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)	
	RB offset		QPSK	16QAM
5MHz	1RB_High	2567.5	20.92	19.51
		2535	21.15	20.06
		2502.5	21.29	19.91
	1RB_Middle	2567.5	20.90	19.48
		2535	21.12	20.00
		2502.5	21.19	19.72
	1RB_Low	2567.5	20.82	19.45
		2535	21.00	19.81
		2502.5	21.12	19.68
	12RB_High	2567.5	19.91	18.90
		2535	20.08	19.21
		2502.5	20.14	19.19

	12RB_Middle	2567.5	19.82	18.88	
		2535	20.15	19.28	
		2502.5	20.24	19.27	
	12RB_Low	2567.5	19.87	18.82	
		2535	19.99	19.16	
		2502.5	20.12	19.21	
	25RB	2567.5	19.80	18.95	
		2535	20.08	19.33	
		2502.5	20.23	19.44	
10MHz	1RB_High	2565	20.57	20.45	
		2535	21.18	21.01	
		2505	21.27	20.82	
	1RB_Middle	2565	20.67	20.32	
		2535	21.11	20.89	
		2505	21.17	20.78	
	1RB_Low	2565	20.92	20.74	
		2535	21.08	20.90	
		2505	21.07	20.58	
	25RB_High	2565	20.01	18.98	
		2535	19.99	18.82	
		2505	20.24	19.32	
	25RB_Middle	2565	19.90	18.93	
		2535	20.08	19.10	
		2505	20.21	19.42	
	25RB_Low	2565	20.10	19.02	
		2535	20.01	19.12	
		2505	20.13	19.33	
	50RB	2565	19.78	18.83	
		2535	19.97	19.15	
		2505	20.19	19.22	
	15MHz	1RB_High	2562.5	20.60	20.42
			2535	21.29	21.07
			2507.5	21.26	21.11
		1RB_Middle	2562.5	20.81	20.61
			2535	21.05	20.81
			2507.5	21.18	20.94
1RB_Low		2562.5	20.98	20.84	
		2535	20.98	20.77	
		2507.5	21.21	20.91	
36RB_High		2562.5	19.96	19.08	
		2535	20.01	19.12	
		2507.5	20.11	19.21	

	36RB_Middle	2562.5	19.87	19.17
		2535	20.06	19.38
		2507.5	20.26	19.52
	36RB_Low	2562.5	20.03	19.09
		2535	20.12	19.21
		2507.5	20.21	19.36
	75RB	2562.5	19.71	18.76
		2535	19.91	19.07
		2507.5	20.19	19.16
20MHz	1RB_High	2560	20.64	19.53
		2535	21.18	20.17
		2510	21.33	20.55
	1RB_Middle	2560	20.97	19.23
		2535	21.21	20.13
		2510	21.07	20.43
	1RB_Low	2560	21.16	19.99
		2535	20.99	19.86
		2510	21.17	20.53
	50RB_High	2560	20.03	18.97
		2535	19.98	19.02
		2510	20.27	19.17
	50RB_Middle	2560	19.92	18.88
		2535	19.97	19.12
		2510	20.23	19.23
	50RB_Low	2560	19.89	18.84
		2535	20.07	19.21
		2510	20.18	19.07
	100RB	2560	19.90	19.00
		2535	20.02	19.13
		2510	20.24	19.25

11.5 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)
GFSK	4.40	5.04	3.45
EDR2M-4_DQPSK	2.70	3.56	1.96
EDR3M-8DPSK	2.69	3.55	1.80

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	17.88	17.89	18.10	18.00
6	18.54	18.56	18.75	18.66
11	17.92	17.94	18.18	18.07

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	14.46	14.45	14.45	14.41	14.35	14.33	14.32	14.31
6	15.08	15.08	15.07	15.04	15.01	14.98	14.94	14.93
11	14.38	14.39	14.38	14.36	14.32	14.29	14.24	14.23

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	13.53	13.51	13.47	13.45	13.43	13.42	13.40	13.39
6	14.20	14.17	14.15	14.13	14.09	14.06	14.04	14.04
11	13.50	13.48	13.47	13.42	13.40	13.37	13.36	13.35

802.11a (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36(5180 MHz)	13.47	13.46	13.44	13.44	13.40	13.37	13.35	13.33
40(5200 MHz)	13.35	13.35	13.34	13.33	13.28	13.25	13.22	13.21
44(5220 MHz)	13.23	13.23	13.22	13.20	13.17	13.13	13.10	13.09
48(5240 MHz)	12.76	12.76	12.75	12.75	12.70	12.68	12.64	12.63
149(5745 MHz)	11.01	11.02	11.00	10.99	10.95	10.92	10.88	10.88
153(5765 MHz)	11.04	11.04	11.03	11.01	10.97	10.95	10.91	10.90
157(5785 MHz)	11.55	11.54	11.53	11.52	11.48	11.44	11.41	11.40
161(5805 MHz)	11.60	11.59	11.58	11.56	11.52	11.49	11.47	11.46
165(5825 MHz)	11.17	11.16	11.16	11.15	11.11	11.07	11.04	11.02

802.11n (dBm) - HT20 (5G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
36(5180 MHz)	12.54	12.55	12.53	12.50	12.50	12.46	12.44	12.43
40(5200 MHz)	12.44	12.42	12.43	12.36	12.34	12.31	12.30	12.29
44(5220 MHz)	12.31	12.31	12.30	12.26	12.23	12.19	12.18	12.13
48(5240 MHz)	11.87	11.87	11.85	11.79	11.77	11.74	11.73	11.72
149(5745 MHz)	10.07	10.07	10.05	10.01	9.97	9.95	9.92	9.92
153(5765 MHz)	10.10	10.09	10.08	10.03	10.01	9.97	9.95	9.94
157(5785 MHz)	10.61	10.60	10.59	10.53	10.51	10.46	10.45	10.45
161(5805 MHz)	10.66	10.66	10.65	10.59	10.57	10.54	10.53	10.53
165(5825 MHz)	10.26	10.25	10.25	10.19	10.17	10.14	10.12	10.11

802.11n (dBm) - HT40 (5G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
38(5190 MHz)	12.57	12.58	12.56	12.50	12.49	12.46	12.45	12.43
46(5230 MHz)	12.38	12.39	12.38	12.30	12.28	12.26	12.25	12.23
151(5755 MHz)	10.51	10.53	10.52	10.45	10.44	10.42	10.42	10.41
159(5795 MHz)	11.10	11.11	11.10	11.03	11.03	11.00	10.99	10.99


12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

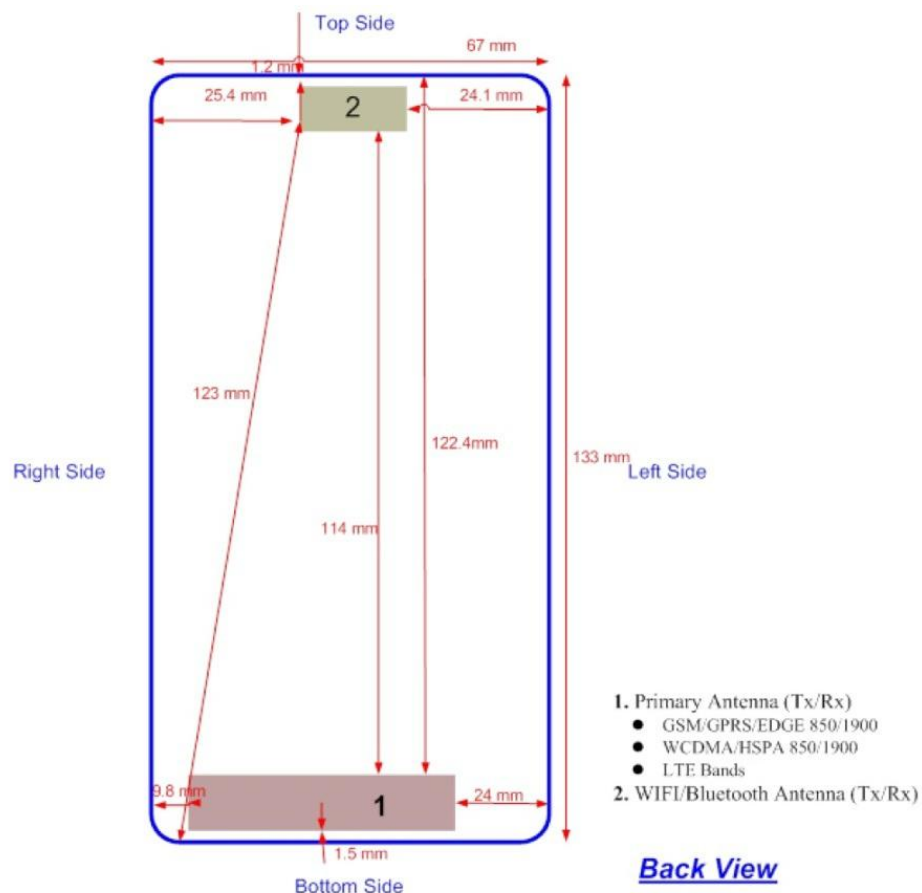

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	Yes	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Appendix A

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Picture 12.2 Power Thresholds

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
			dBm	mW	
Bluetooth	2.441	19	5.04	3.19	Yes
WLAN 2.4GHz	2.45	19	18.75	74.99	No
WLAN 5GHz	5.745	12	14.09	25.64	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.47	0.69	1.16
Highest reported SAR value for Body	Front	1.13	0.11	1.24
	Rear	0.90	0.34	1.24

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.47	0.15	0.62
Highest reported SAR value for Body	Front	1.13	0.07	1.20

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
Bluetooth	2.441	Head	5	5.5	3.55	0.15
Bluetooth	2.441	Body	10	5.5	3.55	0.07

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is $< 1.6 \text{ W/kg}$. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850	1:2
GPRS for GSM1900	1:2.67 or 1:4
EGPRS for GSM1900	1:2 or 1:4
WCDMA850<E& WiFi	1:1

14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.2: The evaluation of multi-batteries for Head Test

Frequency		Mode	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	661	GSM 1900	Right	Touch	CAC2000005C2	0.268	-0.08
1880	661	GSM 1900	Right	Touch	CAC2000008C1	0.307	0.11

Note: According to the values in the above table, the battery, CAC2000008C1, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.3: The evaluation of multi-batteries for Body Test

Frequency		Mode	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1880	661	GSM 1900	Rear	10	CAC2000005C2	0.533	0.09
1880	661	GSM 1900	Rear	10	CAC2000008C1	0.574	-0.05

Note: According to the values in the above table, the battery, CAC2000008C1, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

14.2 SAR results for Fast SAR

Table 14.4: SAR Values (GSM 850 MHz Band - Head) with battery CAC2000008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	Left	Touch	/	32.79	33.7	0.186	0.23	0.240	0.30	0.05
836.6	190	Left	Touch	/	32.84	33.7	0.122	0.15	0.176	0.21	0.11
824.2	128	Left	Touch	/	32.76	33.7	0.091	0.11	0.132	0.16	0.02
848.8	251	Left	Tilt	/	32.79	33.7	0.111	0.14	0.161	0.20	-0.02
836.6	190	Left	Tilt	/	32.84	33.7	0.086	0.10	0.124	0.15	0.04
824.2	128	Left	Tilt	/	32.76	33.7	0.066	0.08	0.095	0.12	-0.11
848.8	251	Right	Touch	Fig.1	32.79	33.7	0.199	0.25	0.262	0.32	0.02
836.6	190	Right	Touch	/	32.84	33.7	0.135	0.16	0.196	0.24	-0.06
824.2	128	Right	Touch	/	32.76	33.7	0.103	0.13	0.149	0.19	0.05
848.8	251	Right	Tilt	/	32.79	33.7	0.111	0.14	0.160	0.20	-0.01
836.6	190	Right	Tilt	/	32.84	33.7	0.088	0.11	0.126	0.15	-0.00
824.2	128	Right	Tilt	/	32.76	33.7	0.072	0.09	0.103	0.13	-0.03

Table 14.5: SAR Values (GSM 850 MHz Band - Body) with battery CAC2000008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	GPRS (4)	Front	/	27.96	28.6	0.281	0.33	0.396	0.46	-0.02
848.8	251	GPRS (4)	Rear	Fig.2	27.83	28.6	0.443	0.53	0.570	0.68	0.01
836.6	190	GPRS (4)	Rear	/	27.96	28.6	0.363	0.42	0.527	0.61	0.16
824.2	128	GPRS (4)	Rear	/	28.00	28.6	0.390	0.45	0.555	0.64	-0.15
836.6	190	GPRS (4)	Left	/	27.96	28.6	0.246	0.29	0.363	0.42	0.13
836.6	190	GPRS (4)	Right	/	27.96	28.6	0.255	0.30	0.380	0.44	-0.06
836.6	190	GPRS (4)	Bottom	/	27.96	28.6	0.066	0.08	0.102	0.12	-0.00
848.8	251	EGPRS (4)	Rear	/	27.79	28.6	0.376	0.45	0.534	0.64	-0.18
848.8	251	Speech	Rear Headset1	/	32.79	33.7	0.294	0.36	0.418	0.52	0.13
848.8	251	Speech	Rear Headset2	/	32.79	33.7	0.291	0.36	0.413	0.51	0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: Headset1 is CCB3001A15C1, Headset2 is CCB3001A15C2.

Table 14.6: SAR Values (GSM 1900 MHz Band - Head) with battery CAC2000008C1

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.4 °C		Liquid Temperature: 21.9 °C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
1909.8	810	Left	Touch	/	29.31	30.7	0.145	0.20	0.242	0.33	0.10
1880	661	Left	Touch	/	29.46	30.7	0.153	0.20	0.255	0.34	-0.12
1850.2	512	Left	Touch	/	29.41	30.7	0.188	0.25	0.297	0.40	0.10
1909.8	810	Left	Tilt	/	29.31	30.7	0.037	0.05	0.062	0.09	-0.08
1880	661	Left	Tilt	/	29.46	30.7	0.036	0.05	0.060	0.08	0.06
1850.2	512	Left	Tilt	/	29.41	30.7	0.033	0.04	0.057	0.08	0.05
1909.8	810	Right	Touch	/	29.31	30.7	0.184	0.25	0.309	0.43	0.15
1880	661	Right	Touch	/	29.46	30.7	0.184	0.24	0.307	0.41	0.11
1850.2	512	Right	Touch	Fig.3	29.41	30.7	0.213	0.29	0.351	0.47	0.18
1909.8	810	Right	Tilt	/	29.31	30.7	0.037	0.05	0.062	0.09	0.01
1880	661	Right	Tilt	/	29.46	30.7	0.037	0.05	0.061	0.08	0.11
1850.2	512	Right	Tilt	/	29.41	30.7	0.031	0.04	0.051	0.07	0.19

Table 14.7: SAR Values (GSM 1900 MHz Band - Body) with battery CAC2000008C1

Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.4 °C		Liquid Temperature: 21.9 °C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
1909.8	810	GPRS (2)	Front	/	26.68	27.5	0.482	0.58	0.903	1.09	-0.14
1880	661	GPRS (3)	Front	/	25.01	25.5	0.404	0.45	0.781	0.87	-0.06
1850.2	512	GPRS (2)	Front	Fig.4	26.65	27.4	0.534	0.63	0.948	1.13	-0.06
1880	661	GPRS (3)	Rear	/	25.01	25.5	0.262	0.29	0.574	0.64	-0.05
1880	661	GPRS (3)	Left	/	25.01	25.5	0.060	0.07	0.100	0.11	-0.08
1880	661	GPRS (3)	Right	/	25.01	25.5	0.093	0.10	0.162	0.18	-0.10
1880	661	GPRS (3)	Bottom	/	25.01	25.5	0.366	0.41	0.672	0.75	-0.16
1850.2	512	EGPRS (4)	Front	/	23.63	24.4	0.468	0.56	0.838	1.00	0.10
1850.2	512	Speech	Front Headset1	/	29.41	30.7	0.451	0.61	0.783	1.05	0.09
1850.2	512	Speech	Front Headset2	/	29.41	30.7	0.414	0.56	0.710	0.96	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: Headset1 is CCB3001A15C1, Headset2 is CCB3001A15C2.

Table 14.8: SAR Values (WCDMA 850 MHz Band - Head) with battery CAC2000008C1

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C				Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
846.6	4233	Left	Touch	/	23.66	24.2	0.218	0.25	0.288	0.33	0.06
836.4	4182	Left	Touch	/	23.63	24.2	0.145	0.17	0.212	0.24	0.13
826.4	4132	Left	Touch	/	23.36	24.2	0.111	0.13	0.163	0.20	0.15
846.6	4233	Left	Tilt	/	23.66	24.2	0.120	0.14	0.174	0.20	0.04
836.4	4182	Left	Tilt	/	23.63	24.2	0.094	0.11	0.136	0.16	-0.06
826.4	4132	Left	Tilt	/	23.36	24.2	0.070	0.08	0.101	0.12	0.17
846.6	4233	Right	Touch	Fig.5	23.66	24.2	0.226	0.26	0.295	0.33	0.07
836.4	4182	Right	Touch	/	23.63	24.2	0.153	0.17	0.222	0.25	-0.12
826.4	4132	Right	Touch	/	23.36	24.2	0.119	0.14	0.173	0.21	0.13
846.6	4233	Right	Tilt	/	23.66	24.2	0.128	0.14	0.184	0.21	-0.04
836.4	4182	Right	Tilt	/	23.63	24.2	0.105	0.12	0.150	0.17	0.08
826.4	4132	Right	Tilt	/	23.36	24.2	0.081	0.10	0.115	0.14	-0.05

Table 14.9: SAR Values (WCDMA 850 MHz Band - Body) with battery CAC2000008C1

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C				Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
836.4	4182	Front	/	23.63	24.2	0.231	0.26	0.327	0.37	-0.12
846.6	4233	Rear	Fig.6	23.66	24.2	0.471	0.53	0.611	0.69	0.01
836.4	4182	Rear	/	23.63	24.2	0.304	0.35	0.434	0.49	0.03
826.4	4132	Rear	/	23.36	24.2	0.245	0.30	0.351	0.43	-0.07
836.4	4182	Left	/	23.63	24.2	0.188	0.21	0.278	0.32	0.02
836.4	4182	Right	/	23.63	24.2	0.235	0.27	0.348	0.40	0.01
836.4	4182	Bottom	/	23.63	24.2	0.052	0.06	0.079	0.09	0.02
846.6	4233	Rear Headset1	/	23.66	24.2	0.386	0.44	0.550	0.62	0.09
846.6	4233	Rear Headset2	/	23.66	24.2	0.385	0.44	0.548	0.62	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: Headset1 is CCB3001A15C1, Headset2 is CCB3001A15C2.

Table 14.10: SAR Values (LTE Band 7 - Head) with battery CAC200008C1

Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
Ambient Temperature: 22.2 °C Liquid Temperature: 21.7 °C												
2510	20850	1RB_High	Left	Touch	/	21.33	21.5	0.086	0.09	0.160	0.17	0.12
2510	20850	1RB_High	Left	Tilt	/	21.33	21.5	0.050	0.05	0.101	0.11	0.19
2510	20850	1RB_High	Right	Touch	Fig.7	21.33	21.5	0.188	0.20	0.371	0.39	-0.14
2510	20850	1RB_High	Right	Tilt	/	21.33	21.5	0.031	0.03	0.069	0.07	0.17
2510	20850	50RB_High	Left	Touch	/	20.27	20.5	0.045	0.05	0.090	0.09	0.13
2510	20850	50RB_High	Left	Tilt	/	20.27	20.5	0.027	0.03	0.058	0.06	0.18
2510	20850	50RB_High	Right	Touch	/	20.27	20.5	0.104	0.11	0.223	0.24	0.18
2510	20850	50RB_High	Right	Tilt	/	20.27	20.5	0.021	0.02	0.046	0.05	0.15

Note1: The LTE mode is QPSK_20MHz.

Table 14.11: SAR Values (LTE Band 7 - Body) with battery CAC200008C1

Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.2 °C Liquid Temperature: 21.7 °C											
2510	20850	1RB_High	Front	/	21.33	21.5	0.304	0.32	0.630	0.66	0.06
2560	21350	1RB_High	Rear	/	21.33	21.5	0.377	0.39	0.794	0.83	0.19
2535	21100	1RB_High	Rear	/	21.33	21.5	0.368	0.38	0.766	0.80	0.03
2510	20850	1RB_High	Rear	/	21.33	21.5	0.422	0.44	0.869	0.90	0.17
2510	20850	1RB_High	Left	/	21.33	21.5	0.027	0.03	0.049	0.05	-0.18
2510	20850	1RB_High	Right	/	21.33	21.5	0.048	0.05	0.088	0.09	-0.01
2560	21350	1RB_High	Bottom	/	21.33	21.5	0.424	0.44	0.932	0.97	0.02
2535	21100	1RB_High	Bottom	/	21.33	21.5	0.397	0.41	0.866	0.90	0.02
2510	20850	1RB_High	Bottom	Fig.8	21.33	21.5	0.513	0.53	1.05	1.09	0.02
2510	20850	50RB_High	Front	/	20.27	20.5	0.226	0.24	0.447	0.47	0.11
2510	20850	50RB_High	Rear	/	20.27	20.5	0.287	0.30	0.592	0.62	0.12
2510	20850	50RB_High	Left	/	20.27	20.5	0.020	0.02	0.036	0.04	0.15
2510	20850	50RB_High	Right	/	20.27	20.5	0.038	0.04	0.065	0.07	-0.16
2510	20850	50RB_High	Bottom	/	20.27	20.5	0.301	0.32	0.654	0.69	0.02
2510	20850	100RB	Rear	/	20.24	20.5	0.327	0.35	0.673	0.71	0.08
2510	20850	100RB	Bottom	/	20.24	20.5	0.394	0.42	0.806	0.86	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.12: SAR Values (Wi-Fi 802.11b - Head) with battery CAC2000008C1

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.6 °C		Liquid Temperature: 22.1 °C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
2437	6	Left	Touch	Fig.9	18.54	19.5	0.136	0.17	0.316	0.39	0.01
2437	6	Left	Tilt	/	18.54	19.5	0.116	0.14	0.256	0.32	0.19
2437	6	Right	Touch	/	18.54	19.5	0.129	0.16	0.289	0.36	0.07
2437	6	Right	Tilt	/	18.54	19.5	0.115	0.14	0.252	0.31	0.11

Table 14.13: SAR Values (Wi-Fi 802.11b - Body) with battery CAC2000008C1

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.6 °C		Liquid Temperature: 22.1 °C		Power Drift (dB)
MHz	Ch.					Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
2437	6	Front	/	18.54	19.5	0.036	0.04	0.068	0.08	-0.09
2437	6	Rear	Fig.10	18.54	19.5	0.129	0.16	0.275	0.34	-0.09
2437	6	Left	/	18.54	19.5	0.010	0.01	0.022	0.03	-0.17
2437	6	Right	/	18.54	19.5	0.005	0.01	0.011	0.01	0.16
2437	6	Top	/	18.54	19.5	0.061	0.08	0.124	0.15	-0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.14: SAR Values (Wi-Fi 802.11a - Head) with battery CAC2000008C1

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.5 °C		Liquid Temperature: 22.0 °C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
5180	36	Left	Touch	/	13.47	14.5	0.120	0.15	0.343	0.43	-0.11
5180	36	Left	Tilt	/	13.47	14.5	0.098	0.12	0.315	0.40	0.08
5180	36	Right	Touch	Fig.11	13.47	14.5	0.156	0.20	0.543	0.69	-0.08
5180	36	Right	Tilt	/	13.47	14.5	0.137	0.17	0.468	0.59	-0.04
5805	161	Left	Touch	/	11.60	13.0	0.017	0.02	0.076	0.10	-0.06
5805	161	Left	Tilt	/	11.60	13.0	0.016	0.02	0.074	0.10	0.02
5805	161	Right	Touch	/	11.60	13.0	0.007	0.01	0.048	0.07	0.17
5805	161	Right	Tilt	/	11.60	13.0	0.007	0.01	0.045	0.06	-0.09

Table 14.15: SAR Values (Wi-Fi 802.11a - Body) with battery CAC2000008C1

Ambient Temperature: 22.5 °C					Liquid Temperature: 22.0 °C					
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
5180	36	Front	/	13.47	14.5	0.032	0.04	0.087	0.11	-0.04
5180	36	Rear	/	13.47	14.5	0.013	0.02	0.035	0.04	-0.08
5180	36	Left	/	13.47	14.5	0.014	0.02	0.037	0.05	0.04
5180	36	Right	/	13.47	14.5	0.012	0.02	0.030	0.04	0.11
5180	36	Top	Fig.12	13.47	14.5	0.058	0.07	0.156	0.20	-0.15
5805	161	Front	/	11.60	13.0	0.009	0.01	0.024	0.03	0.15
5805	161	Rear	/	11.60	13.0	0.009	0.01	0.023	0.03	-0.08
5805	161	Left	/	11.60	13.0	0.006	0.01	0.017	0.02	0.04
5805	161	Right	/	11.60	13.0	0.006	0.01	0.019	0.03	-0.08
5805	161	Top	/	11.60	13.0	0.012	0.02	0.042	0.06	0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.16: SAR Values (Wi-Fi 802.11a - Head) with battery CAC2000005C2

Ambient Temperature: 22.5 °C					Liquid Temperature: 22.0 °C						
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
5180	36	Right	Touch	/	13.47	14.5	0.138	0.17	0.474	0.60	0.10

Table 14.17: SAR Values (LTE Band 7 - Body) with battery CAC2000005C2

Ambient Temperature: 22.2 °C					Liquid Temperature: 21.7 °C						
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2510	20850	1RB_High	Bottom	/	21.33	21.5	0.477	0.50	0.976	1.01	-0.07

14.3 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.18: SAR Values (GSM 850 MHz Band - Head) with battery CAC200008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	Right	Touch	Fig.1	32.79	33.7	0.199	0.25	0.262	0.32	0.02

Table 14.19: SAR Values (GSM 850 MHz Band - Body) with battery CAC200008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	GPRS (4)	Rear	Fig.2	27.83	28.6	0.443	0.53	0.570	0.68	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.20: SAR Values (GSM 1900 MHz Band - Head) with battery CAC200008C1

Ambient Temperature: 22.4 °C						Liquid Temperature: 21.9 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	Right	Touch	Fig.3	29.41	30.7	0.213	0.29	0.351	0.47	0.18

Table 14.21: SAR Values (GSM 1900 MHz Band - Body) with battery CAC200008C1

Ambient Temperature: 22.4 °C						Liquid Temperature: 21.9 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	GPRS (2)	Front	Fig.4	26.65	27.4	0.534	0.63	0.948	1.13	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.22: SAR Values (WCDMA 850 MHz Band - Head) with battery CAC200008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
846.6	4233	Right	Touch	Fig.5	23.66	24.2	0.226	0.26	0.295	0.33	0.07

Table 14.23: SAR Values (WCDMA 850 MHz Band - Body) with battery CAC200008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
846.6	4233	Rear	Fig.6	23.66	24.2	0.471	0.53	0.611	0.69	0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.24: SAR Values (LTE Band 7 - Head) with battery CAC2000008C1

Ambient Temperature: 22.2 °C						Liquid Temperature: 21.7 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
2510	20850	1RB_High	Right	Touch	Fig.7	21.33	21.5	0.188	0.20	0.371	0.39	-0.14

Note1: The LTE mode is QPSK_20MHz.

Table 14.25: SAR Values (LTE Band 7 - Body) with battery CAC2000008C1

Ambient Temperature: 22.2 °C						Liquid Temperature: 21.7 °C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2510	20850	1RB_High	Bottom	Fig.8	21.33	21.5	0.513	0.53	1.05	1.09	0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.26: SAR Values (Wi-Fi 802.11b - Head) with battery CAC2000008C1

Ambient Temperature: 22.6 °C						Liquid Temperature: 22.1 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2437	6	Left	Touch	Fig.9	18.54	19.5	0.136	0.17	0.316	0.39	0.01

Table 14.27: SAR Values (Wi-Fi 802.11b - Body) with battery CAC2000008C1

Ambient Temperature: 22.6 °C						Liquid Temperature: 22.1 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
2437	6	Rear	Fig.10	18.54	19.5	0.129	0.16	0.275	0.34	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.28: SAR Values (Wi-Fi 802.11a - Head) with battery CAC2000008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
5180	36	Right	Touch	Fig.11	13.47	14.5	0.156	0.20	0.543	0.69	-0.08

Table 14.29: SAR Values (Wi-Fi 802.11a - Body) with battery CAC2000008C1

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
5180	36	Top	Fig.12	13.47	14.5	0.058	0.07	0.156	0.20	-0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body GSM 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1850.2	512	Front	10	0.948	0.941	1.01	/

Table 15.2: SAR Measurement Variability for Body LTE Band 7 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
2510	20850	Bottom	10	1.05	1.04	1.01	/

Note: The LTE mode is QPSK_20MHz_1RB_High.

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$							9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$							18.5	18.2	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.8	10.7	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.6	21.4	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										

18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.2	19.9	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample	A	3.3	N	1	1	1	3.3	3.3	71

	positioning									
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.3	13.2	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						26.6	26.4	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	February 15, 2013	One year
02	Power meter	NRVD	102083	September 11, 2013	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49071430	February 08, 2013	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 30, 2013	One year
07	E-field Probe	SPEAG EX3DV4	3846	September 03, 2013	One year
08	DAE	SPEAG DAE4	771	November 12, 2013	One year
09	Dipole Validation Kit	SPEAG D835V2	443	August 29, 2013	One year
10	Dipole Validation Kit	SPEAG D1900V2	5d101	July 09, 2013	One year
11	Dipole Validation Kit	SPEAG D2450V2	853	July 08, 2013	One year
12	Dipole Validation Kit	SPEAG D2600V2	1012	July 05, 2013	One year
13	Dipole Validation Kit	SPEAG D5GHzV2	1060	July 03, 2013	One year

END OF REPORT BODY

ANNEX A Graph Results

850 Right Cheek High

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.135$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(8.92, 8.92, 8.92)

Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.278 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.539 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

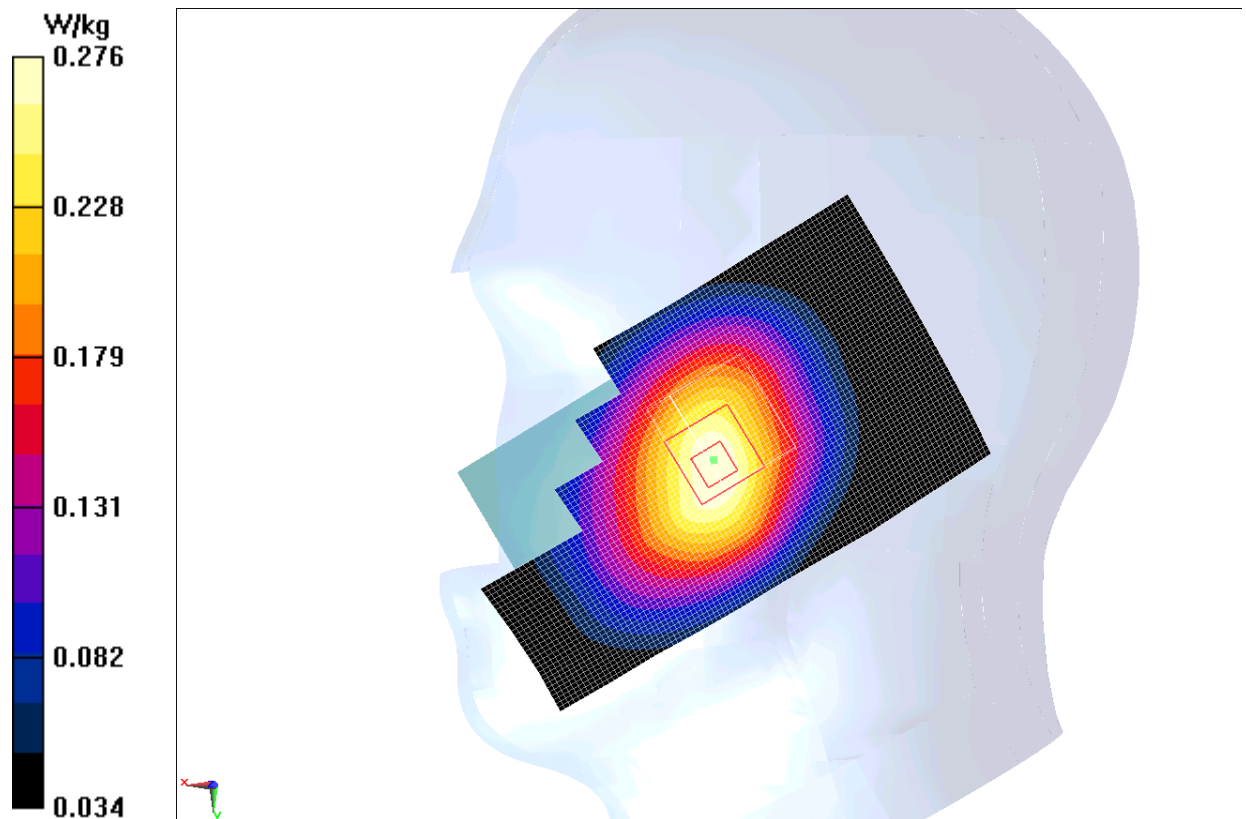


Fig.1 850MHz CH251

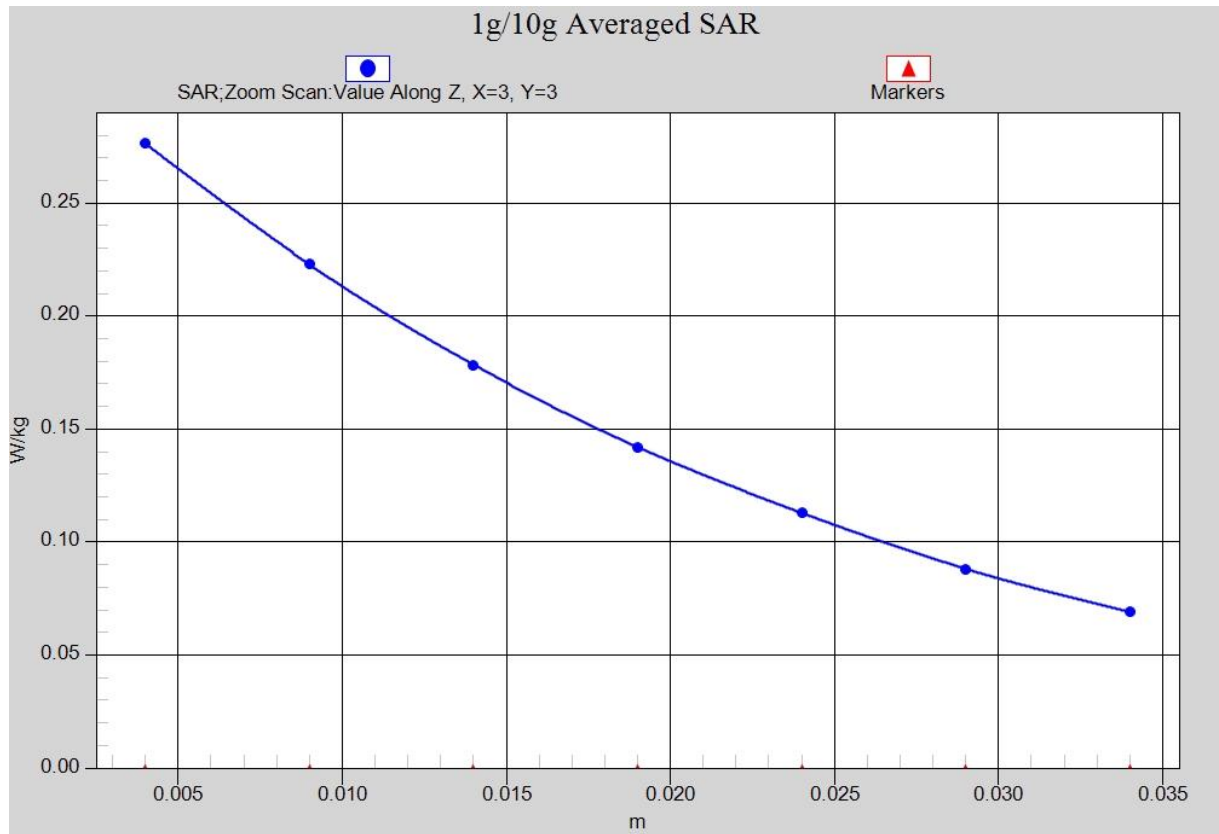


Fig. 1-1 Z-Scan at power reference point (850 MHz CH251)

850 Body Rear High

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 56.339$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: EX3DV4 - SN3846 ConvF(8.73, 8.73, 8.73)

Rear High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.596 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.491 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 0.593 W/kg

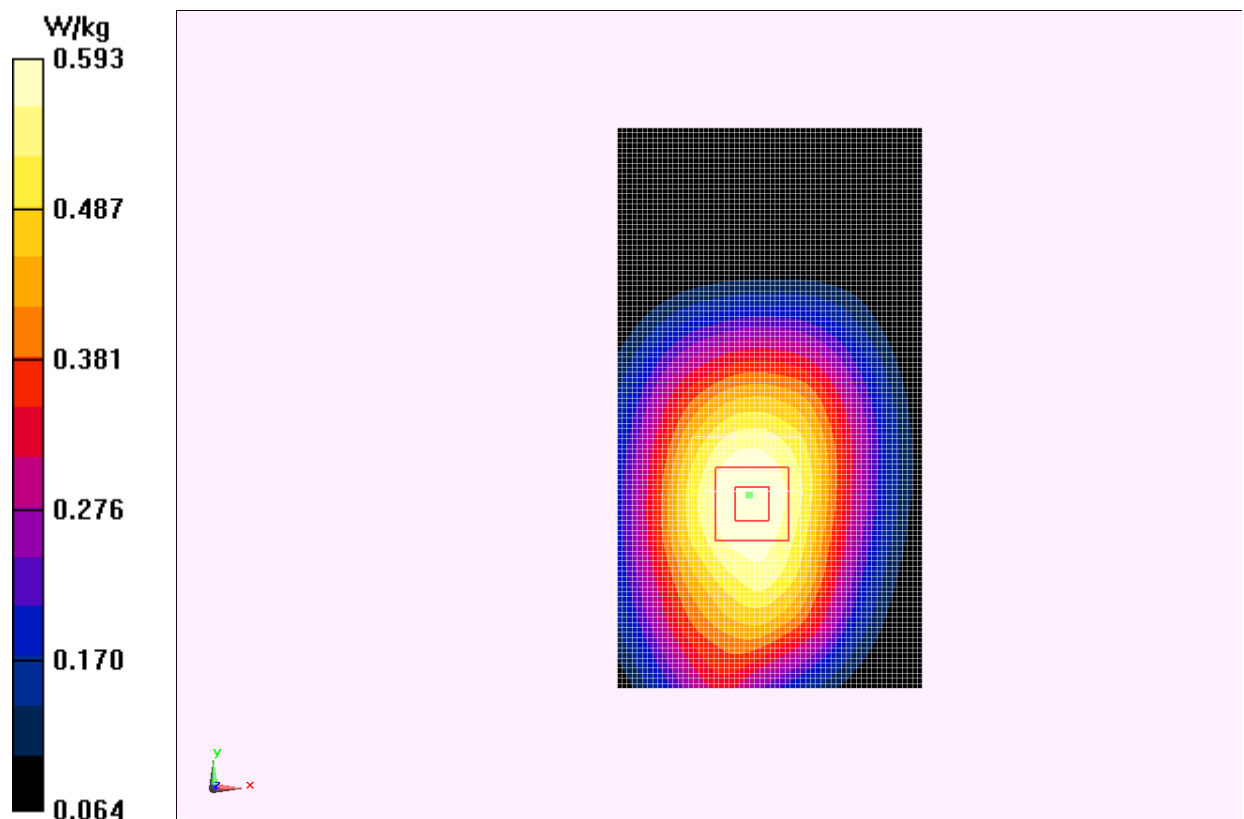


Fig.2 850 MHz CH251

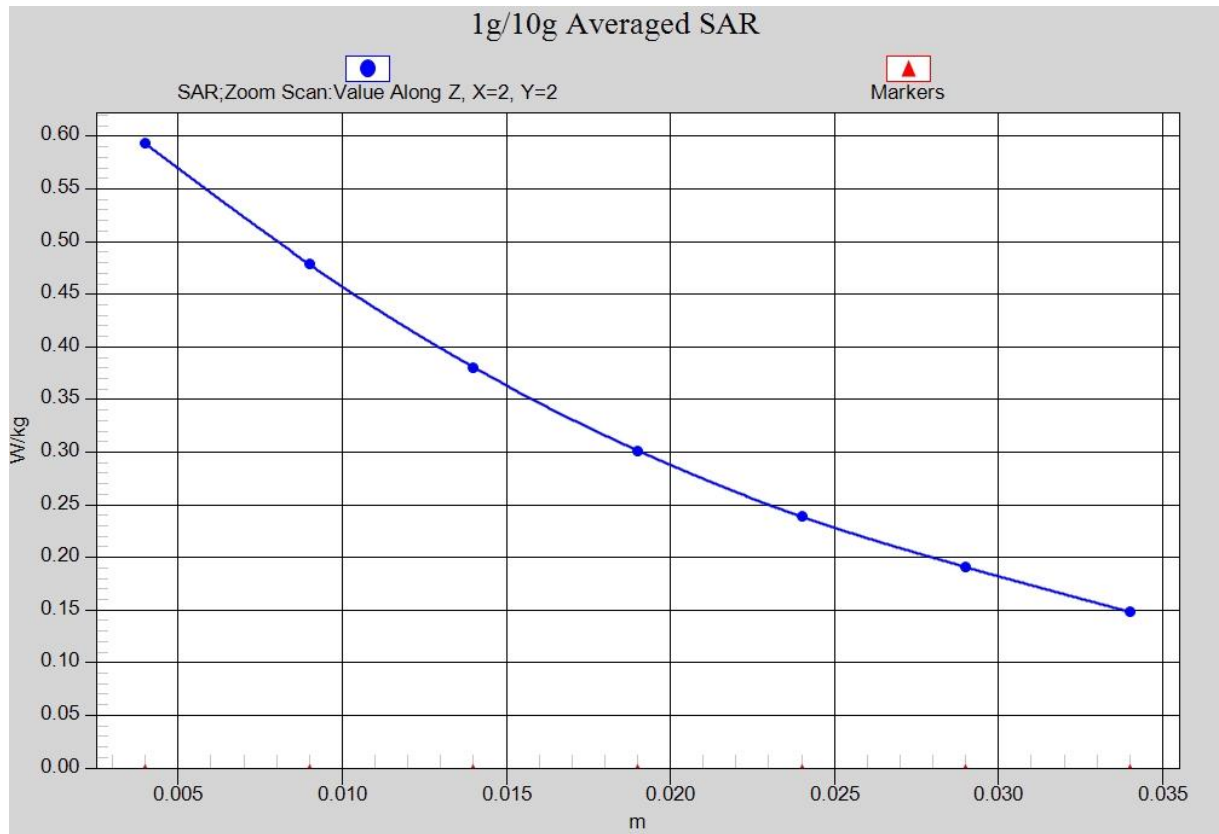


Fig. 2-1 Z-Scan at power reference point (850 MHz CH251)

1900 Right Cheek Low

Date: 2013-10-3

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.334$ mho/m; $\epsilon_r = 39.799$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(7.57, 7.57, 7.57)

Cheek Low/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.378 W/kg

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.905 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

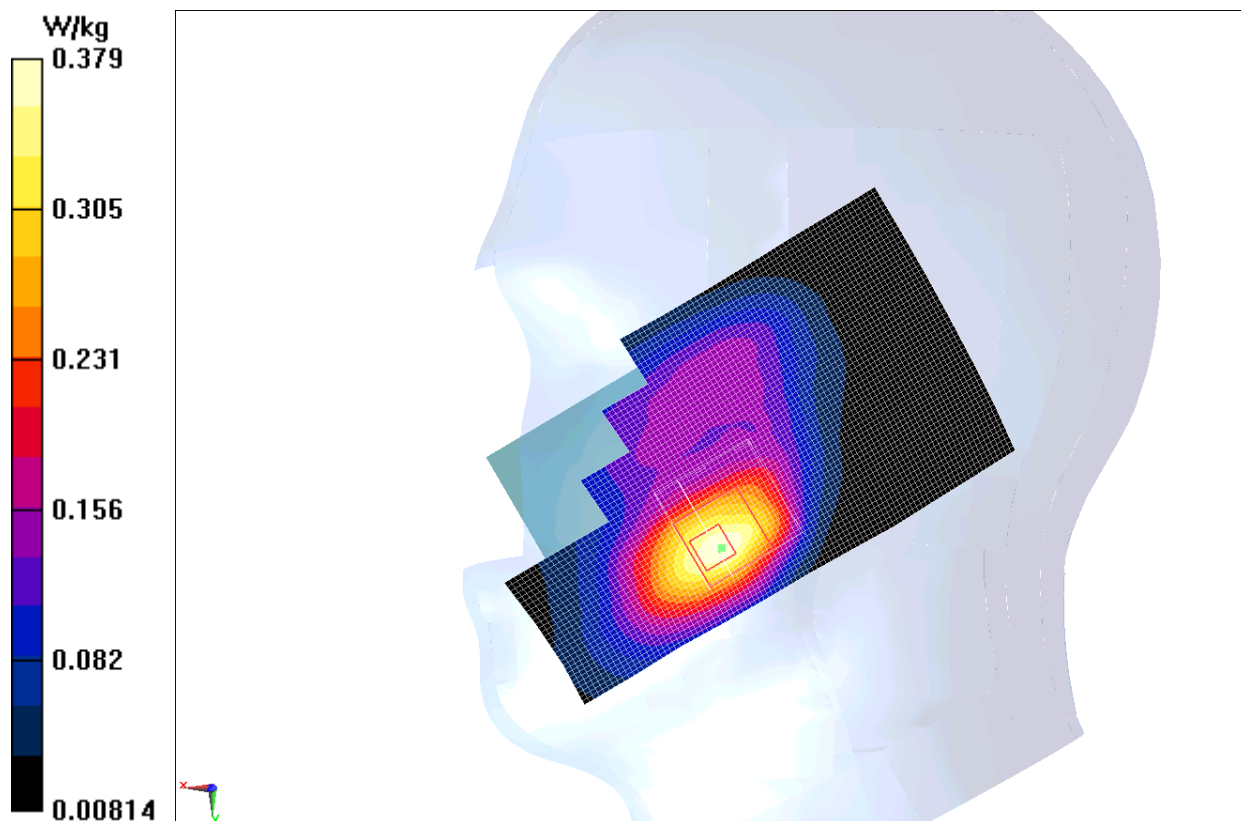


Fig.3 1900 MHz CH512

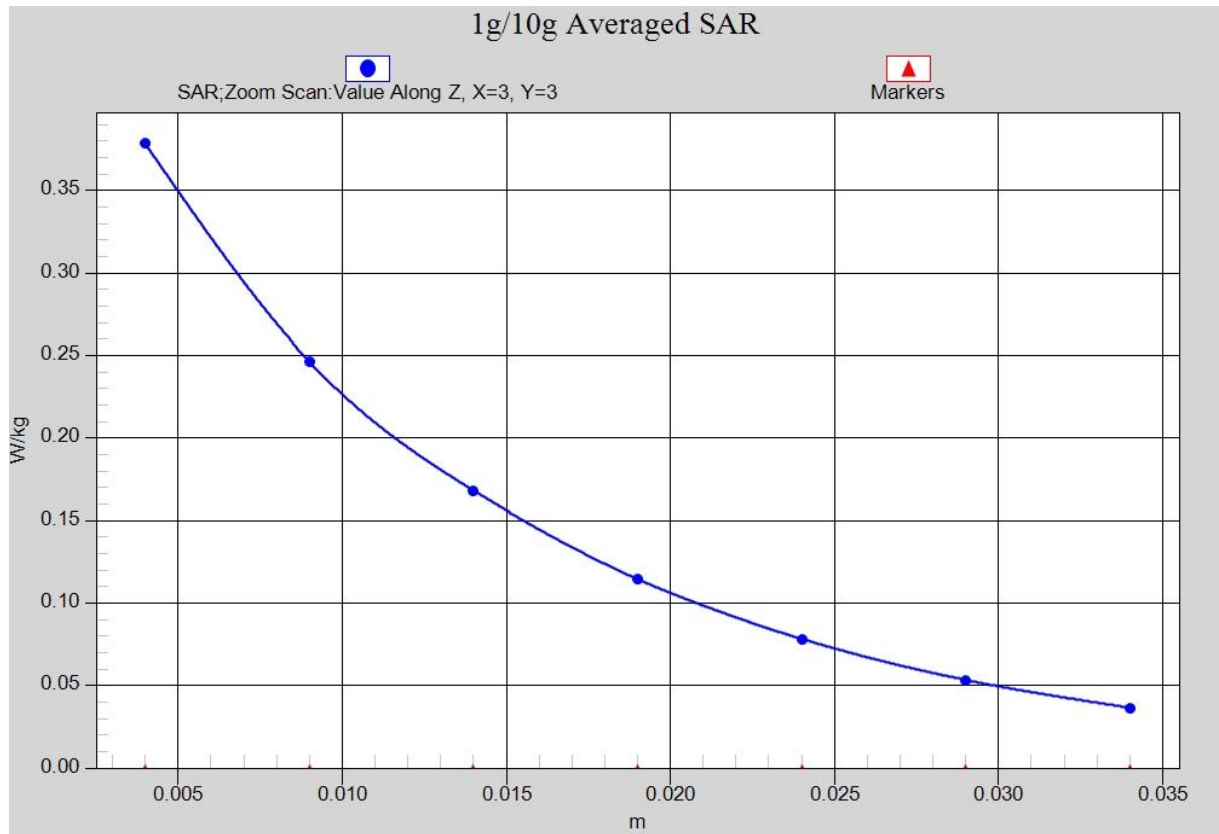


Fig. 3-1 Z-Scan at power reference point (1900 MHz CH512)

1900 Body Front Low

Date: 2013-10-3

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.511$ mho/m; $\epsilon_r = 54.592$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN3846 ConvF(7.03, 7.03, 7.03)

Front Low/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.950 W/kg

Front Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.345 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.534 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

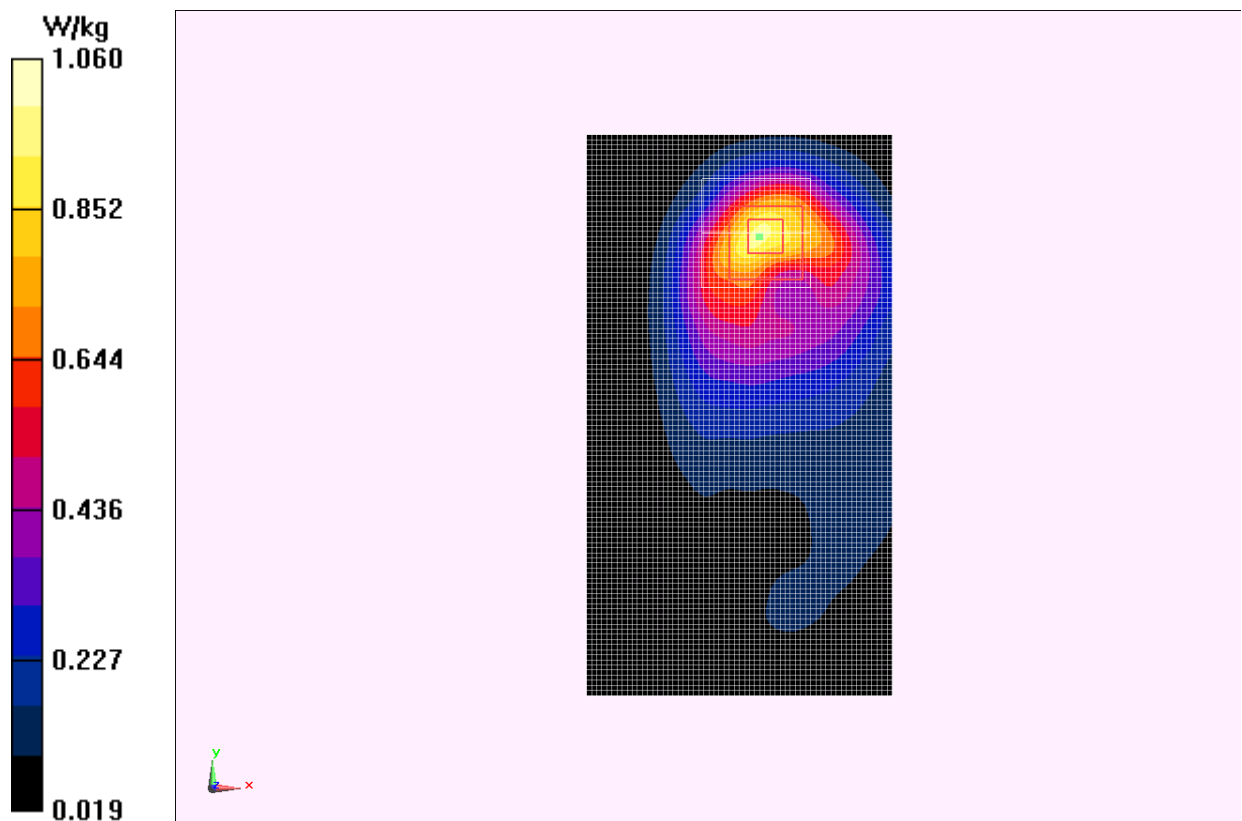


Fig.4 1900 MHz CH512

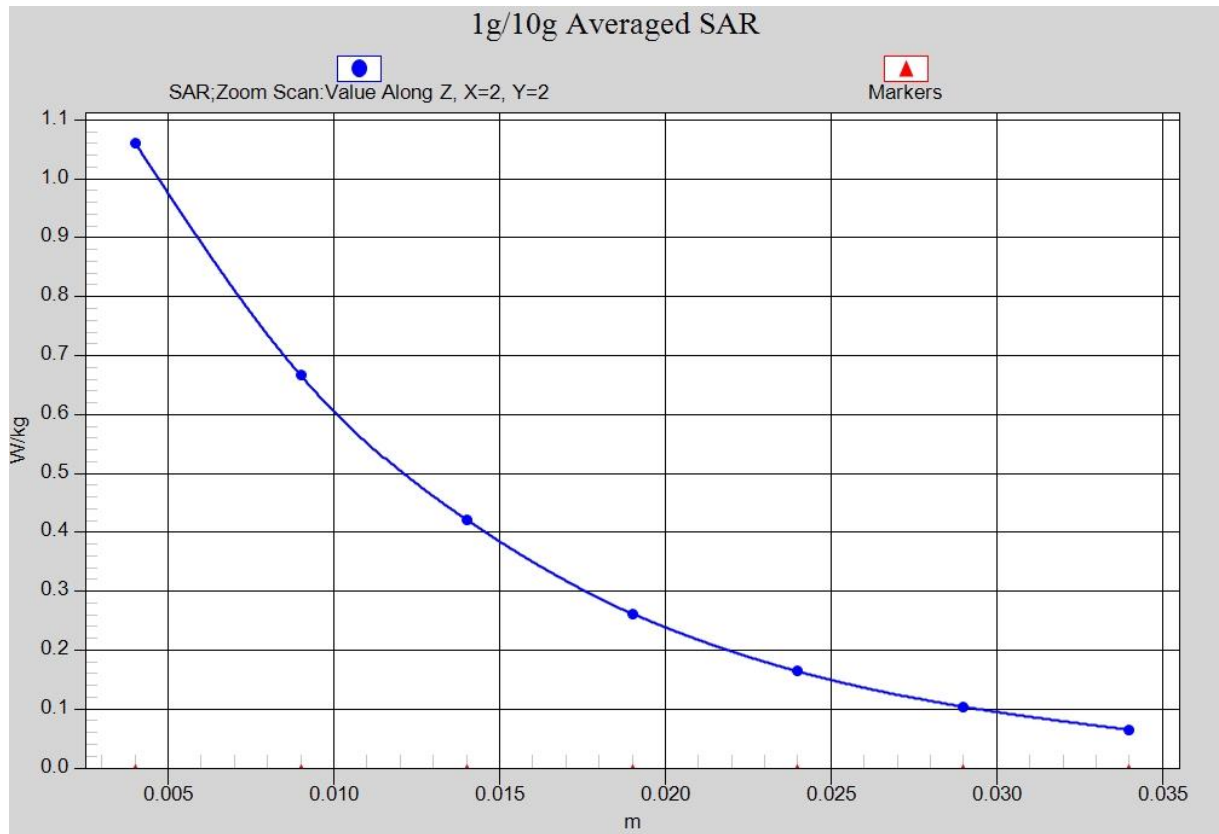


Fig.4-1 Z-Scan at power reference point (1900 MHz CH512)

WCDMA 850 Right Cheek High

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 40.152$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(8.92, 8.92, 8.92)

Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.311 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.927 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

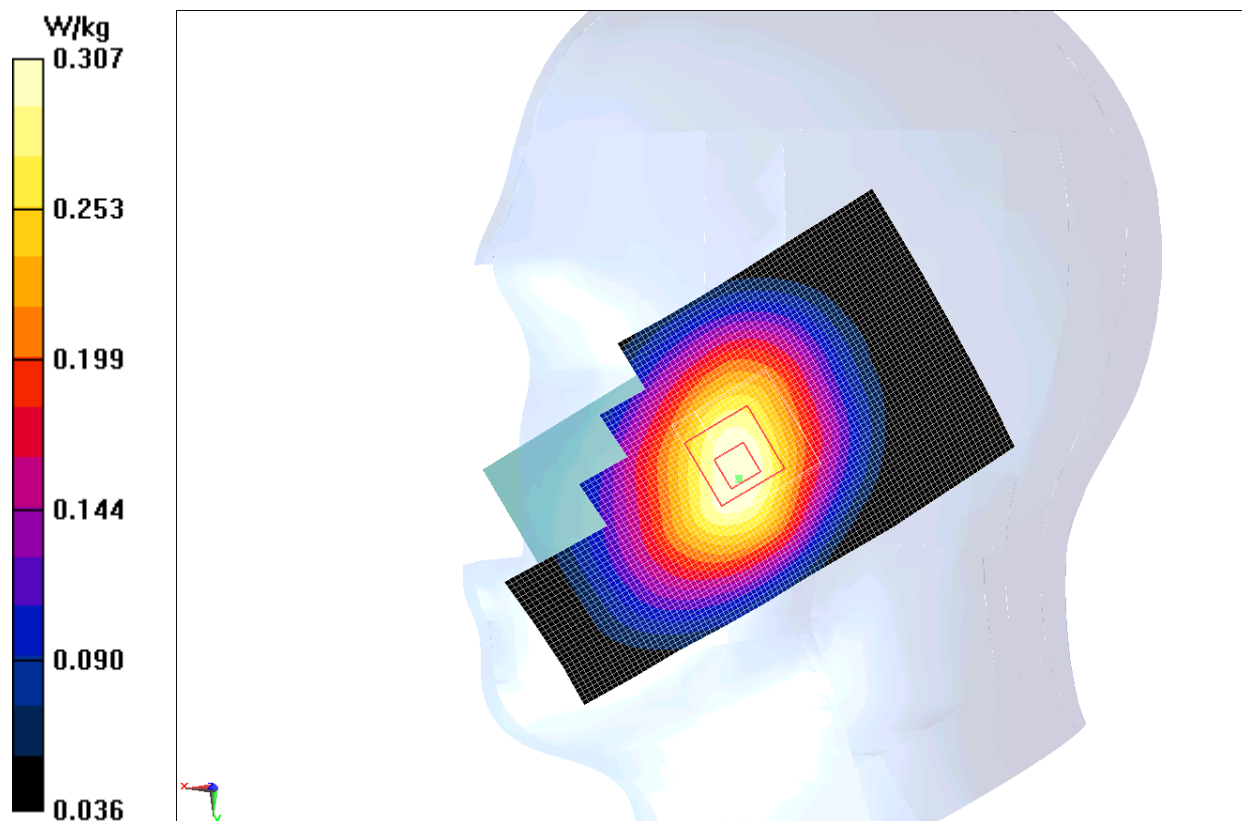


Fig.5 WCDMA 850 CH4233

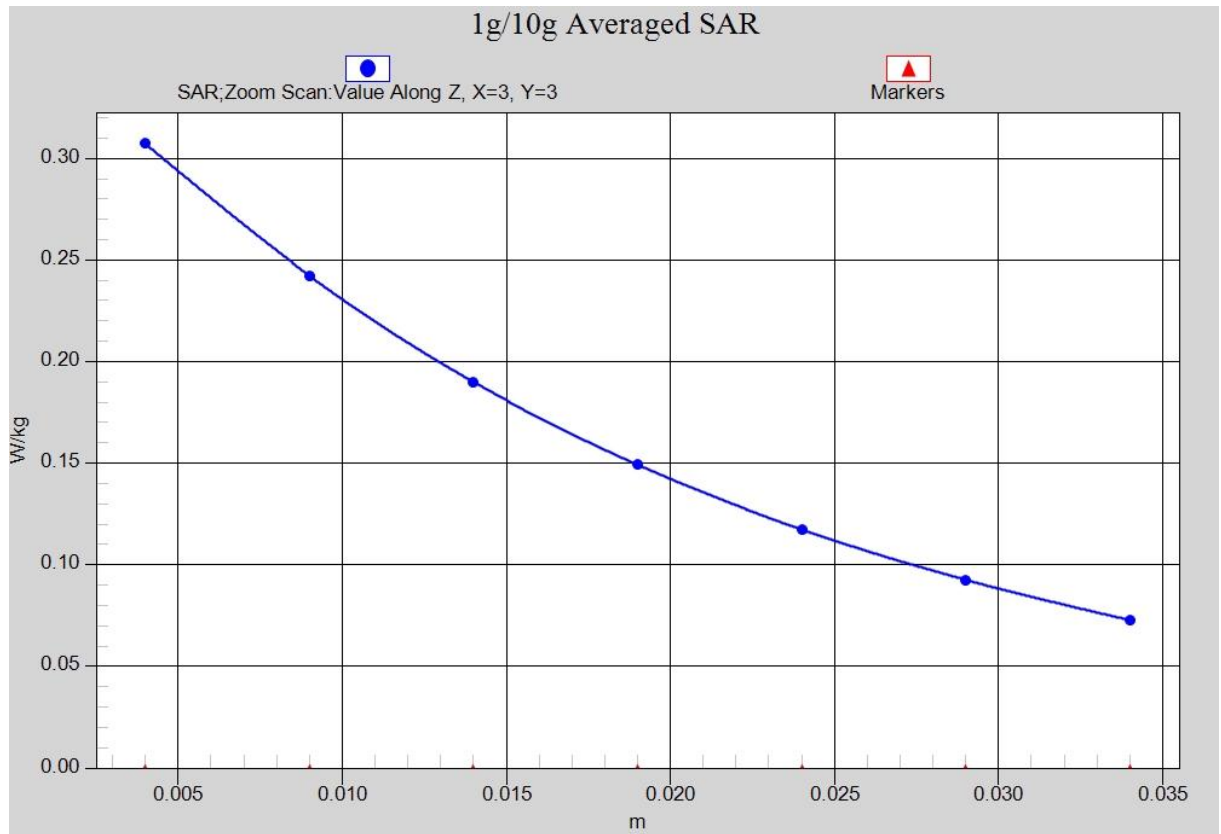


Fig. 5-1 Z-Scan at power reference point (WCDMA 850 CH4233)

WCDMA 850 Body Rear High

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.987$ mho/m; $\epsilon_r = 56.366$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(8.73, 8.73, 8.73)

Rear High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.639 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.631 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 0.641 W/kg

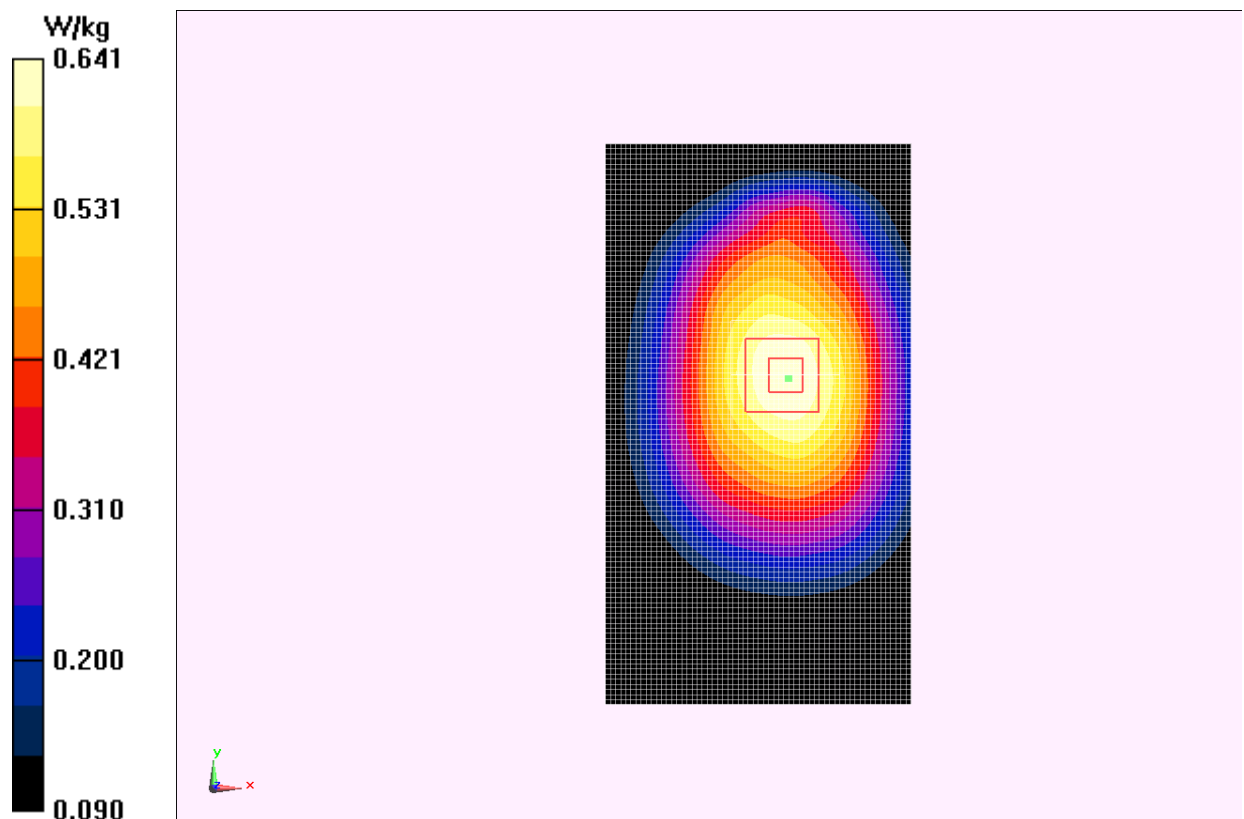


Fig.6 WCDMA 850 CH4233

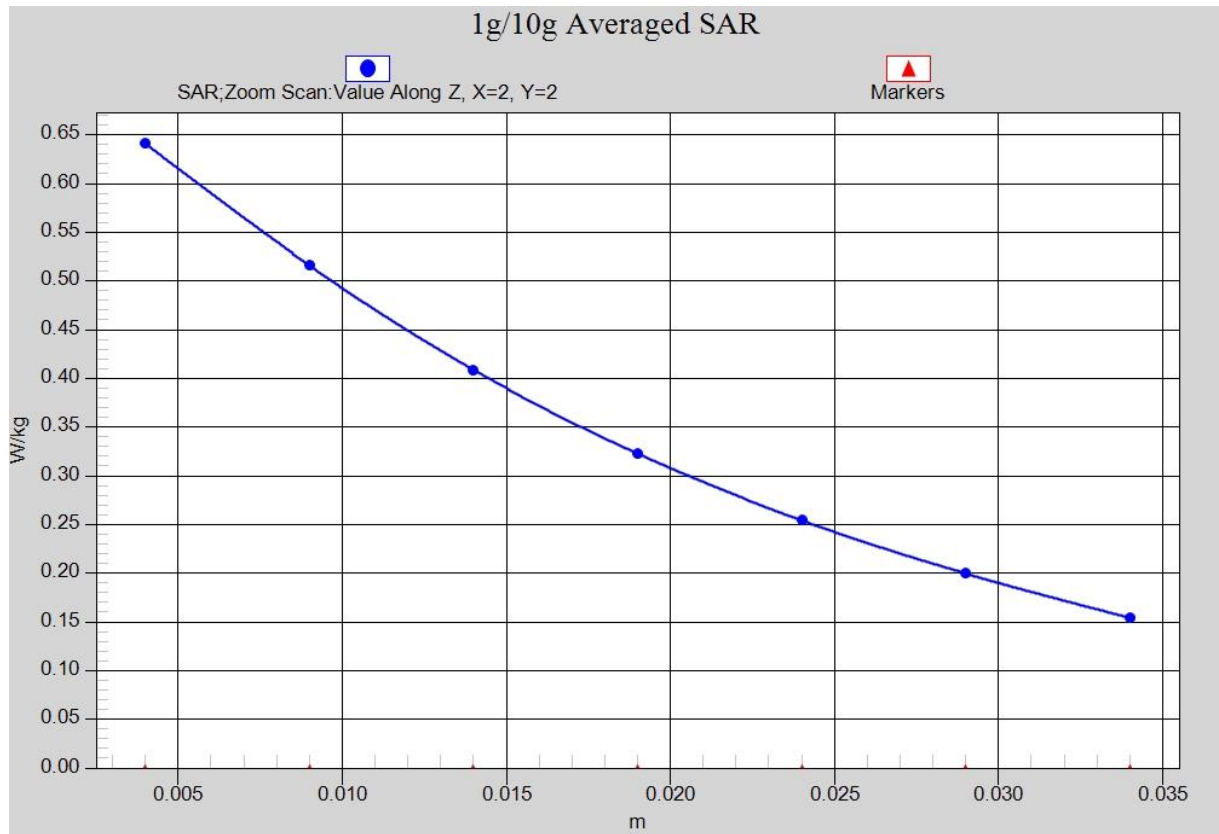


Fig. 6-1 Z-Scan at power reference point (WCDMA850 CH4233)

LTE Band7 Right Cheek Low with QPSK_20M_1RB_High

Date: 2014-1-8

Electronics: DAE4 Sn771

Medium: Head 2600 MHz

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.894$ mho/m; $\epsilon_r = 38.709$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

Communication System: LTE Band7 Frequency: 2510 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.68, 6.68, 6.68)

Cheek Low/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.525 W/kg

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.962 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

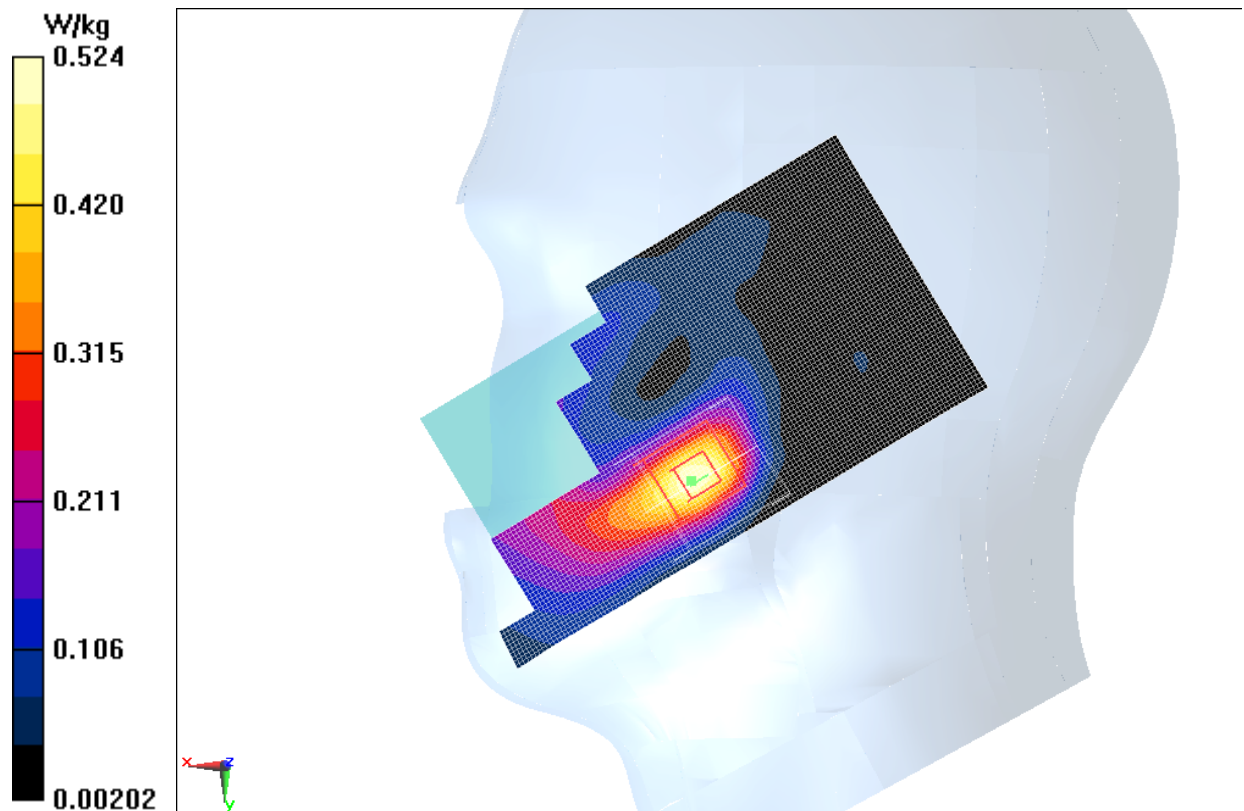


Fig.7 LTE Band7 CH20850

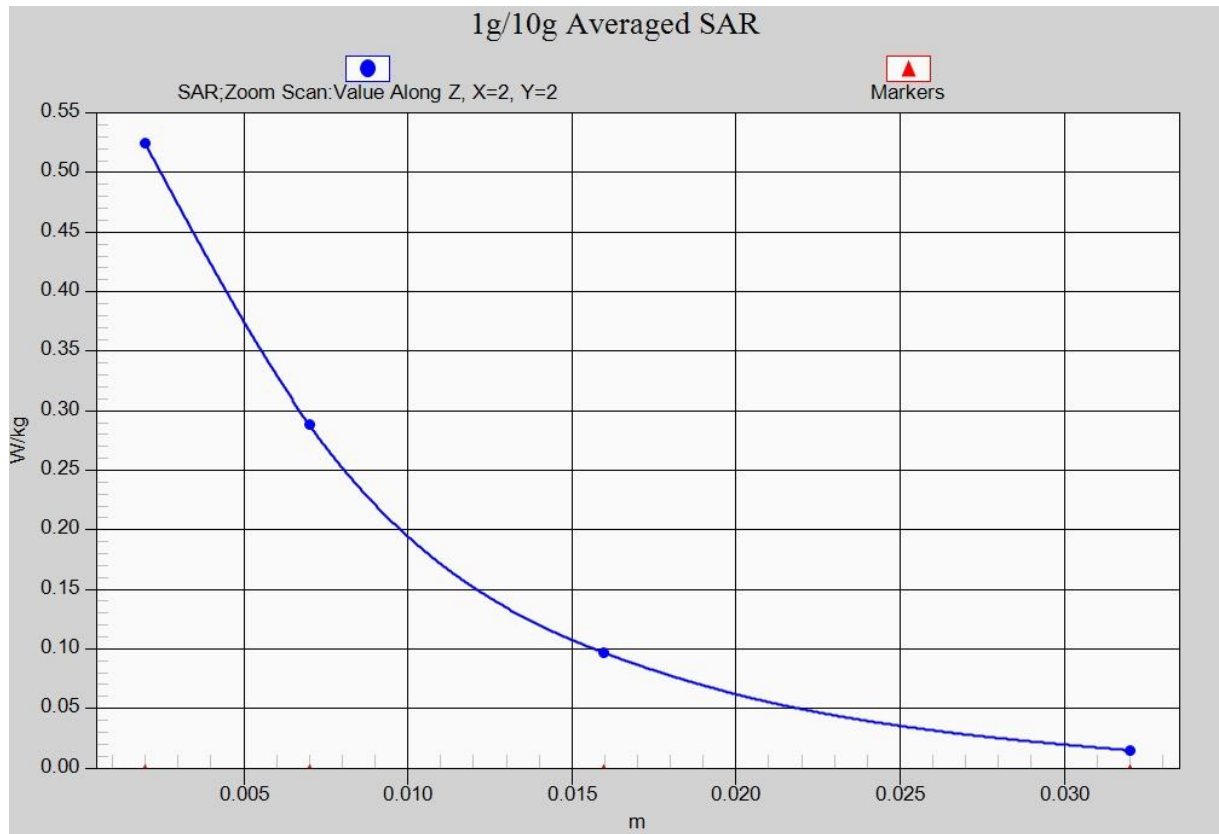


Fig. 7-1 Z-Scan at power reference point (LTE Band7 CH20850)

LTE Band7 Body Bottom Edge Low with QPSK_20M_1RB_High

Date: 2014-01-08

Electronics: DAE4 Sn771

Medium: Body 2600 MHz

Medium parameters used: $f = 2510$ MHz; $\sigma = 2.069$ mho/m; $\epsilon_r = 53.261$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

Communication System: LTE Band7 Frequency: 2510 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.59, 6.59, 6.59)

Bottom Edge Low/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Bottom Edge Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.775 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

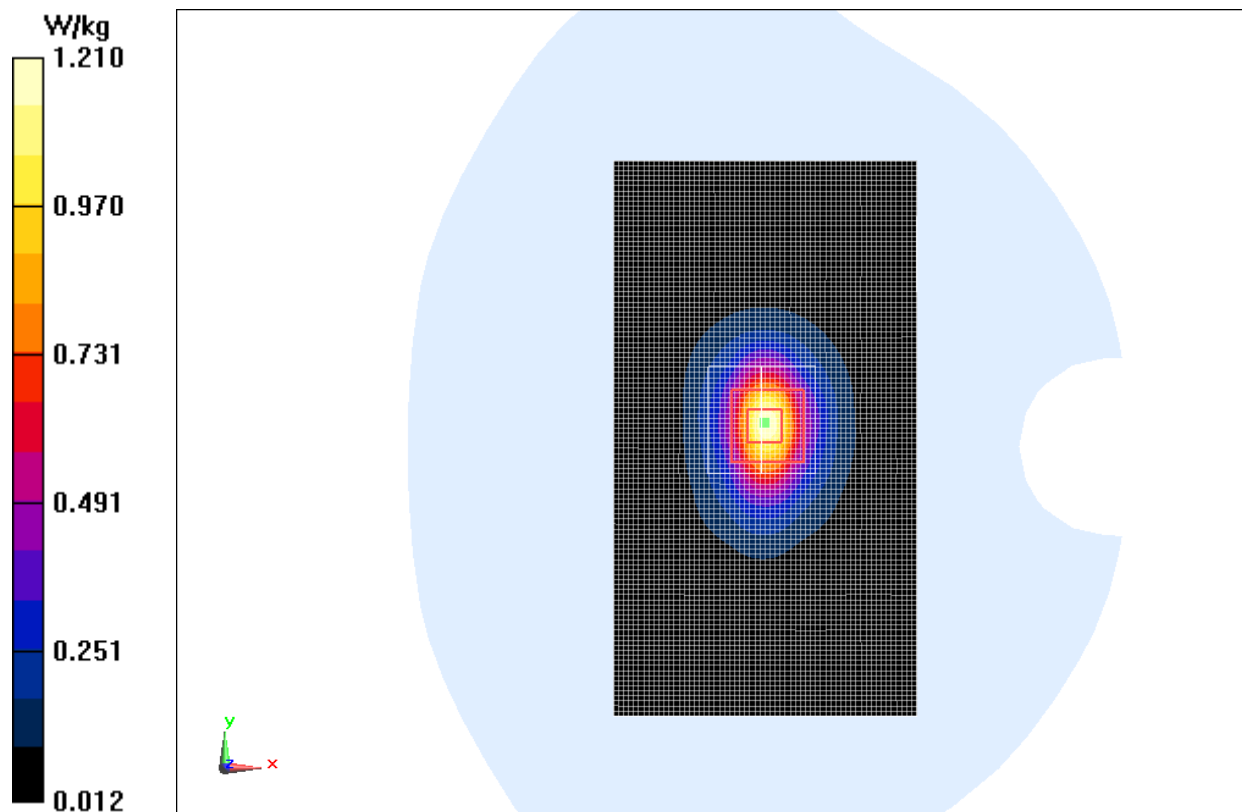


Fig.8 LTE Band7 CH20850

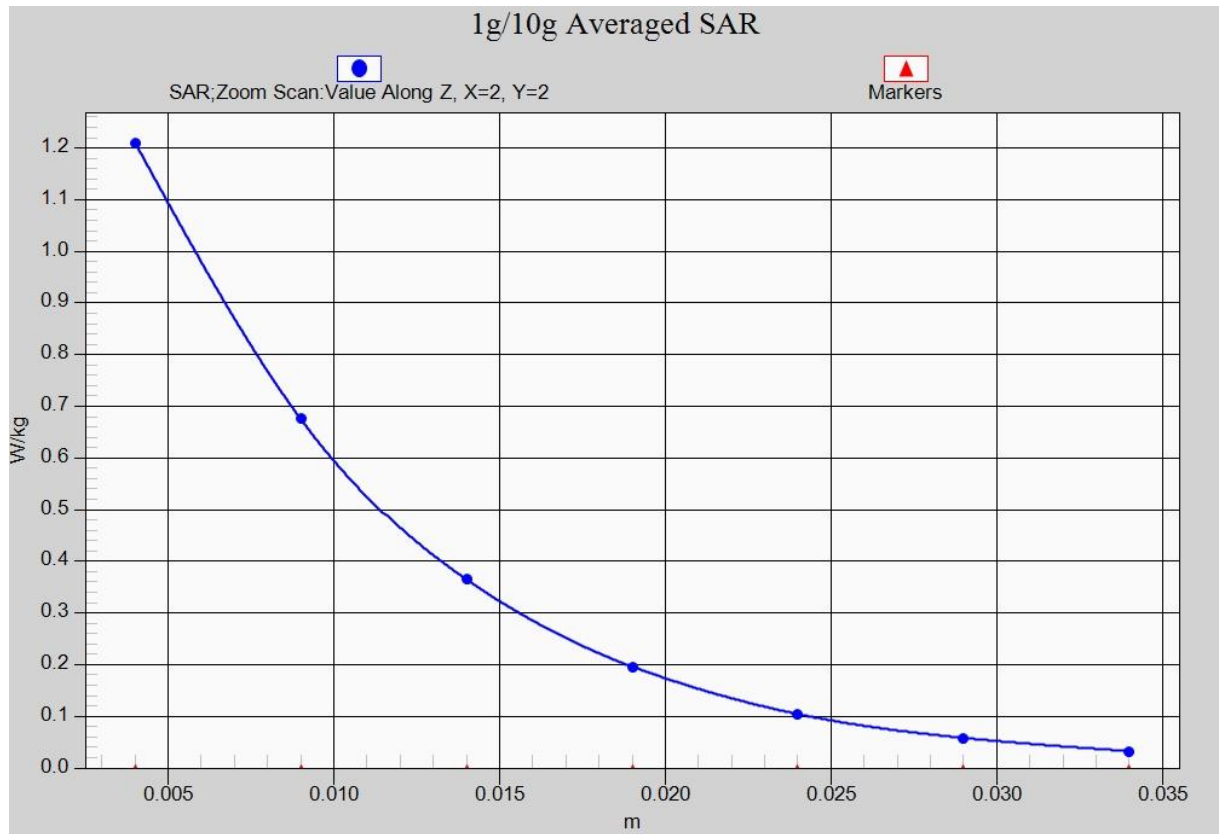


Fig. 8-1 Z-Scan at power reference point (LTE Band7 CH20850)

Wifi 802.11b Left Cheek Channel 6

Date: 2013-9-28

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.462$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.1°C

Communication System: WLAN 2450 Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.78, 6.78, 6.78)

Cheek Middle/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.430 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.139 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

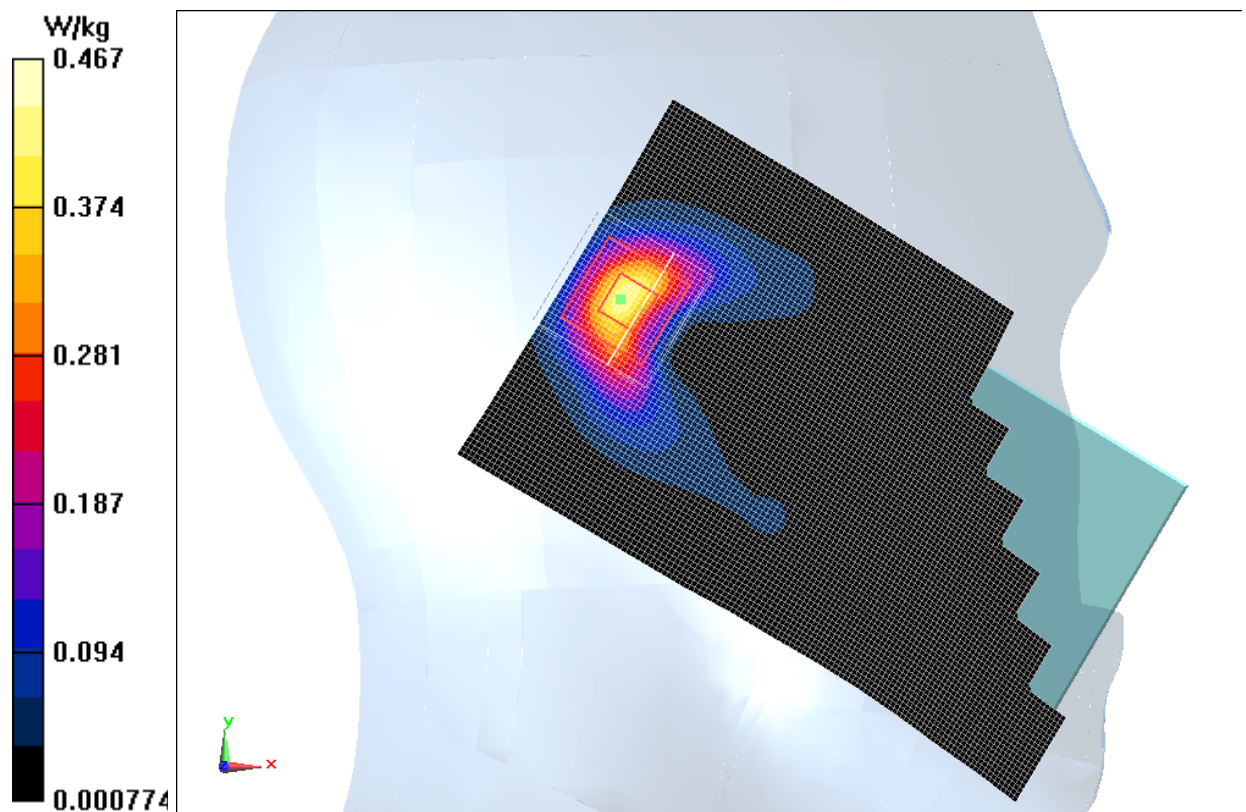


Fig.9 2450 MHz CH6

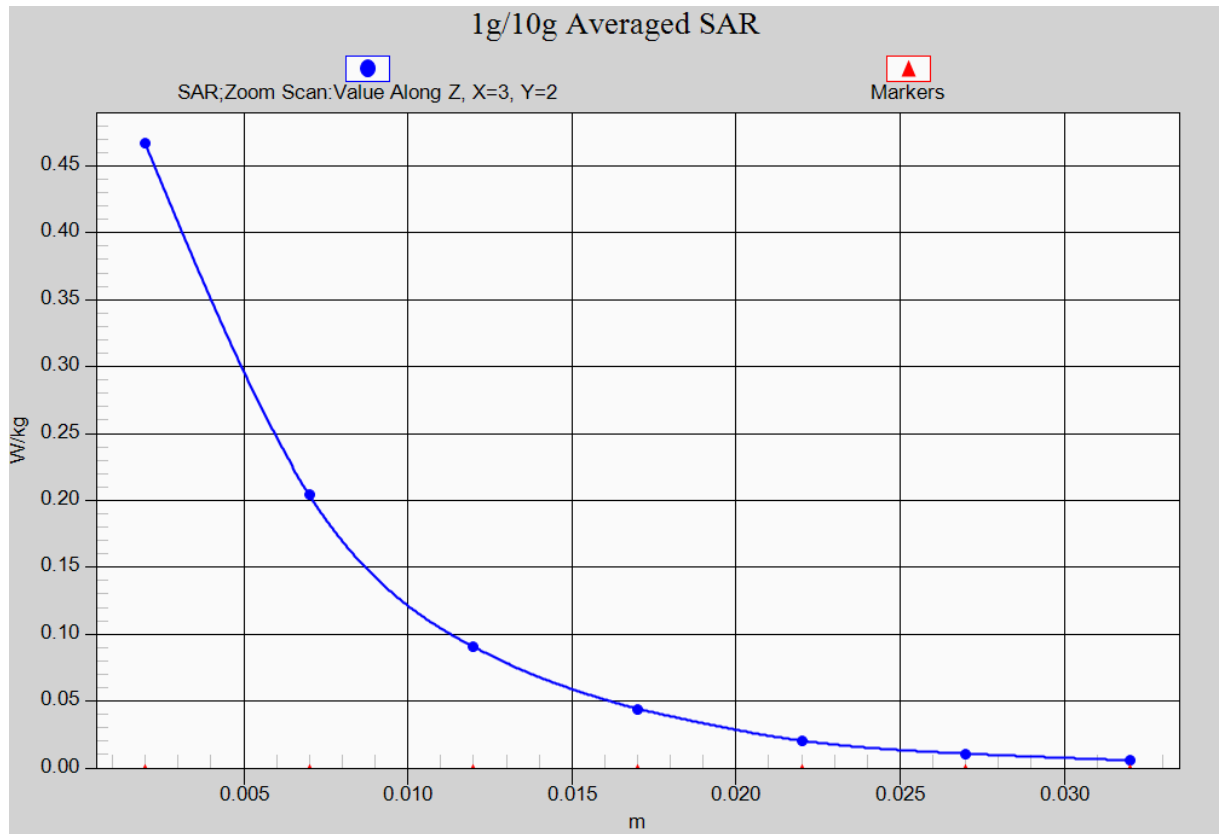


Fig. 9-1 Z-Scan at power reference point (2450 MHz CH6)

Wifi 802.11b Body Rear Channel 6

Date: 2013-9-28

Electronics: DAE4 Sn771

Medium: Body 2450 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.959$ mho/m; $\epsilon_r = 53.326$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.1°C

Communication System: WLAN 2450 Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.73, 6.73, 6.73)

Rear Middle/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.409 W/kg

Rear Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.114 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.408 W/kg

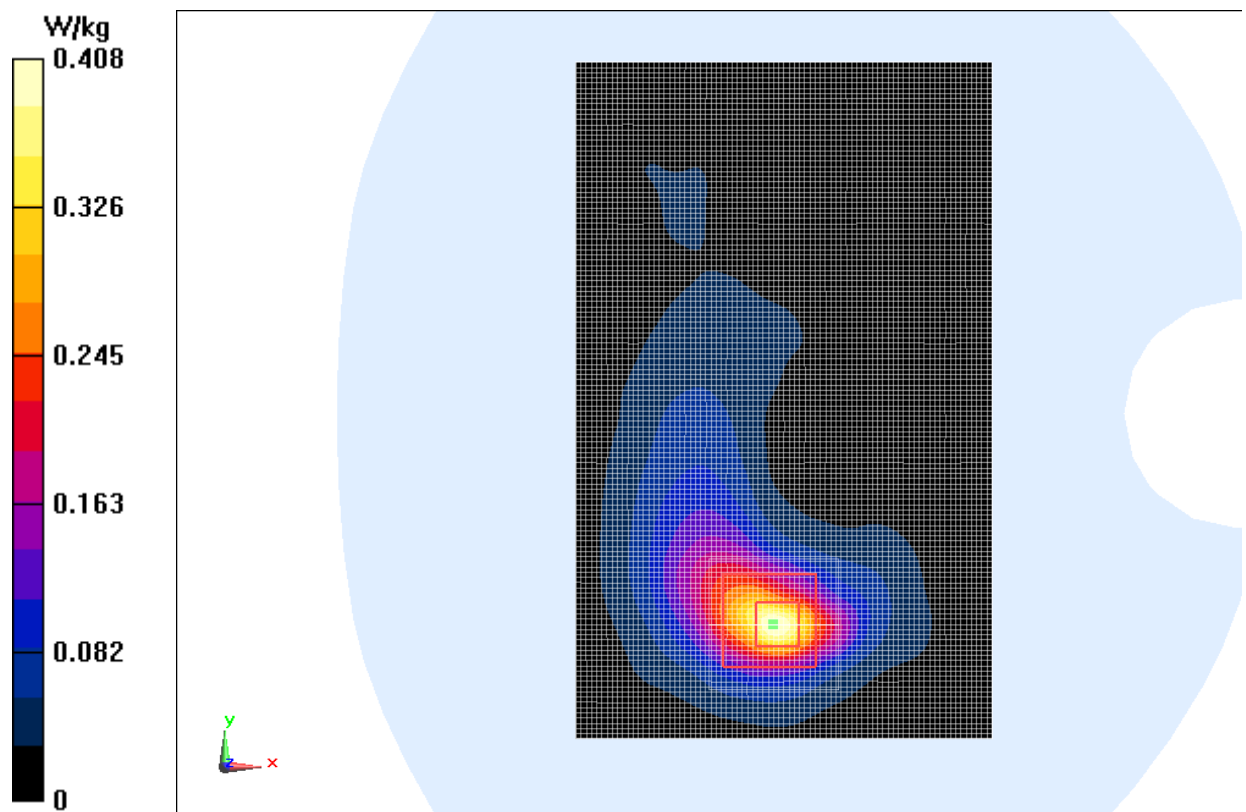


Fig.10 2450 MHz CH6

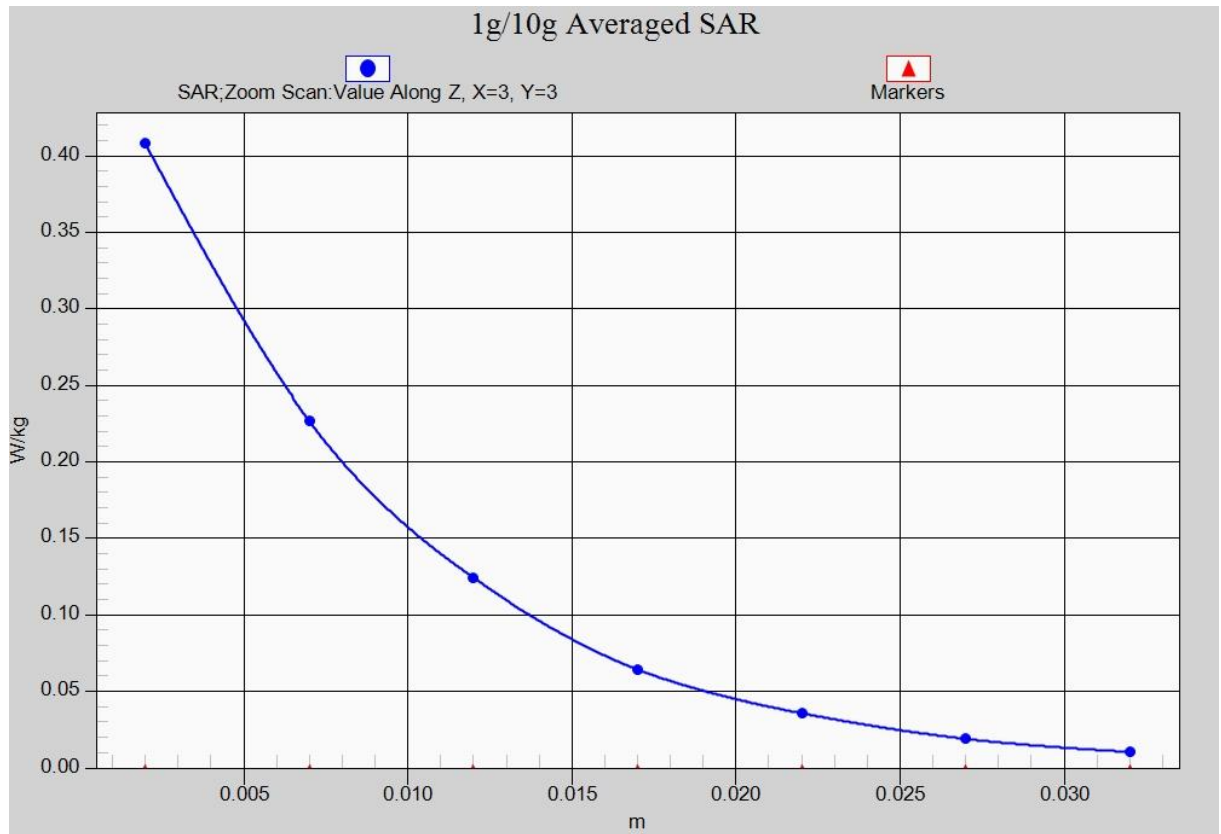


Fig. 10-1 Z-Scan at power reference point (2450 MHz CH6)

Wifi 802.11a Right Cheek Channel 36

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Head 5200 MHz

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.558$ mho/m; $\epsilon_r = 36.693$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: Wlan 5G Frequency: 5180 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(5.25, 5.25, 5.25)

Cheek/Area Scan (91x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Cheek/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.898 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

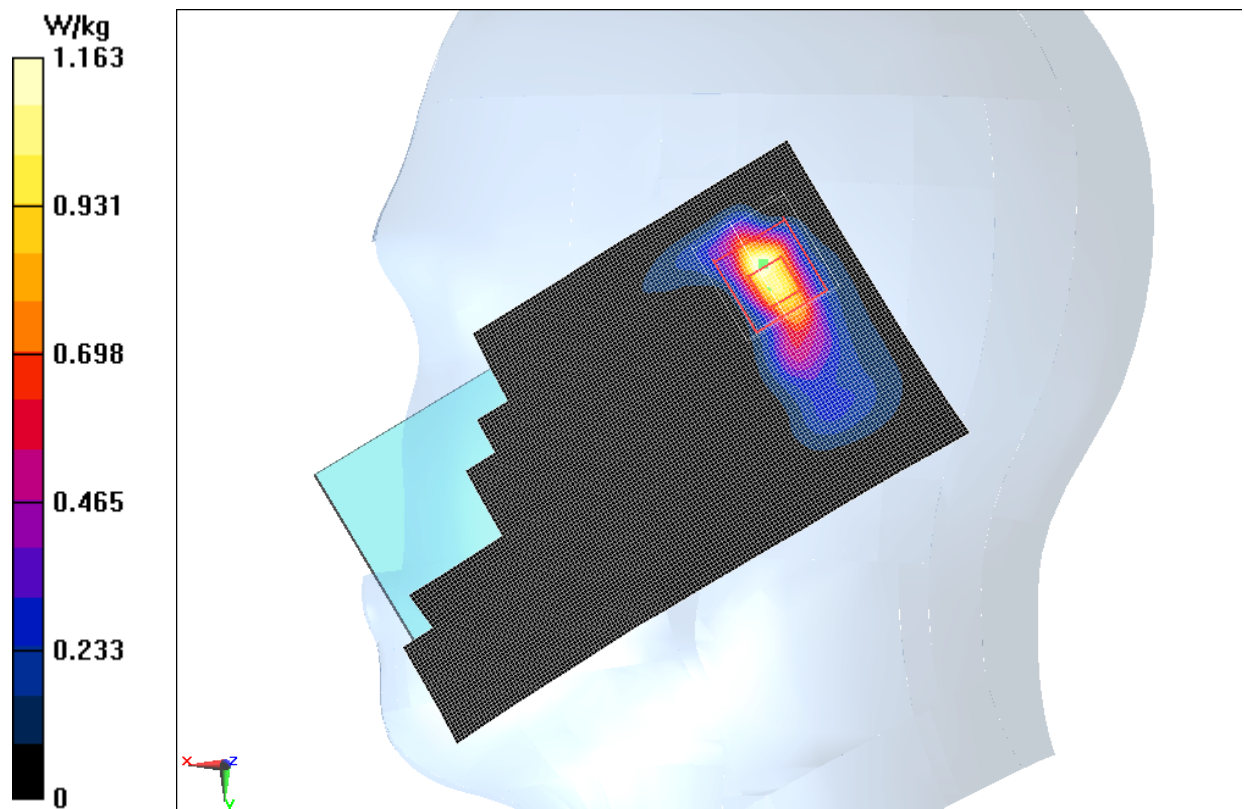


Fig.11 5GHz CH36

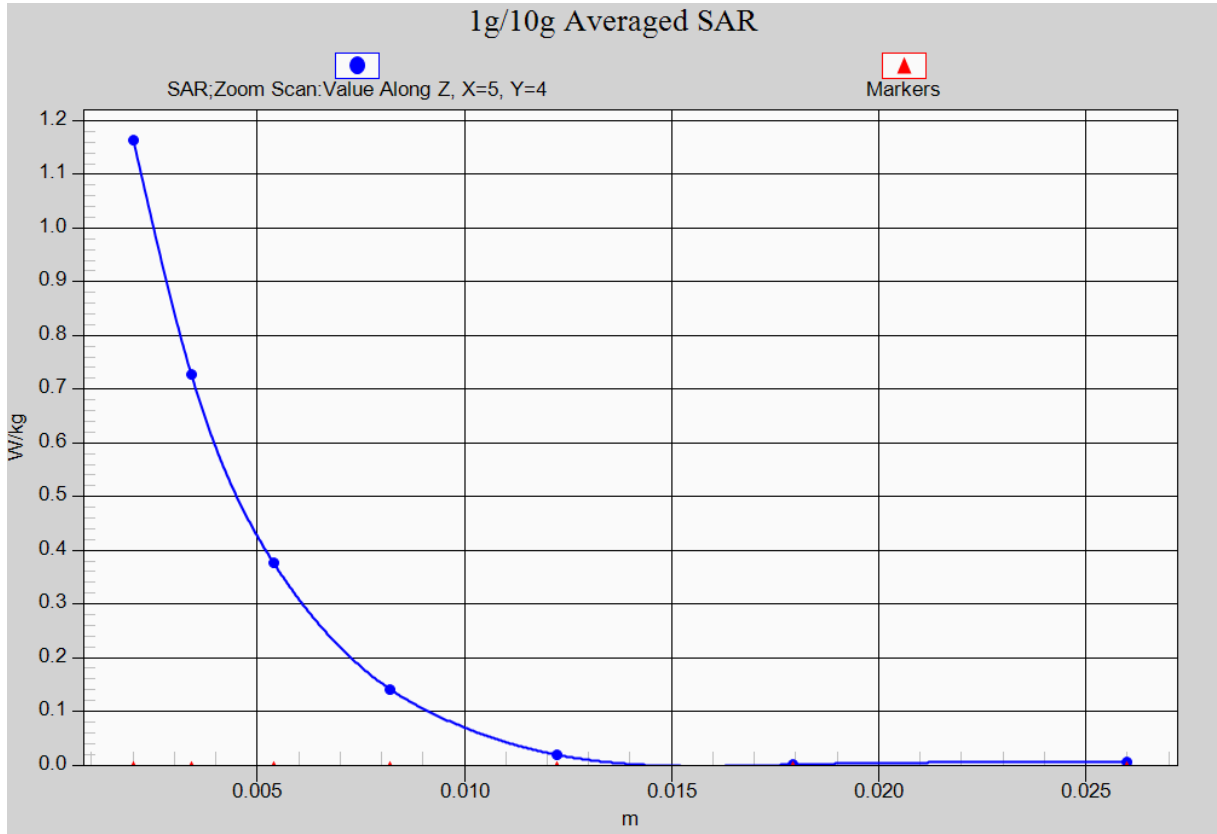


Fig. 11-1 Z-Scan at power reference point (5GHz CH36)

Wifi 802.11a Top Edge Channel 36

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Body 5300 MHz

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.368$ mho/m; $\epsilon_r = 50.366$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: WLAN 5G Frequency: 5320 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(4.17, 4.17, 4.17)

Top Edge/Area Scan (91x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.326 W/kg

Top Edge/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.029 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

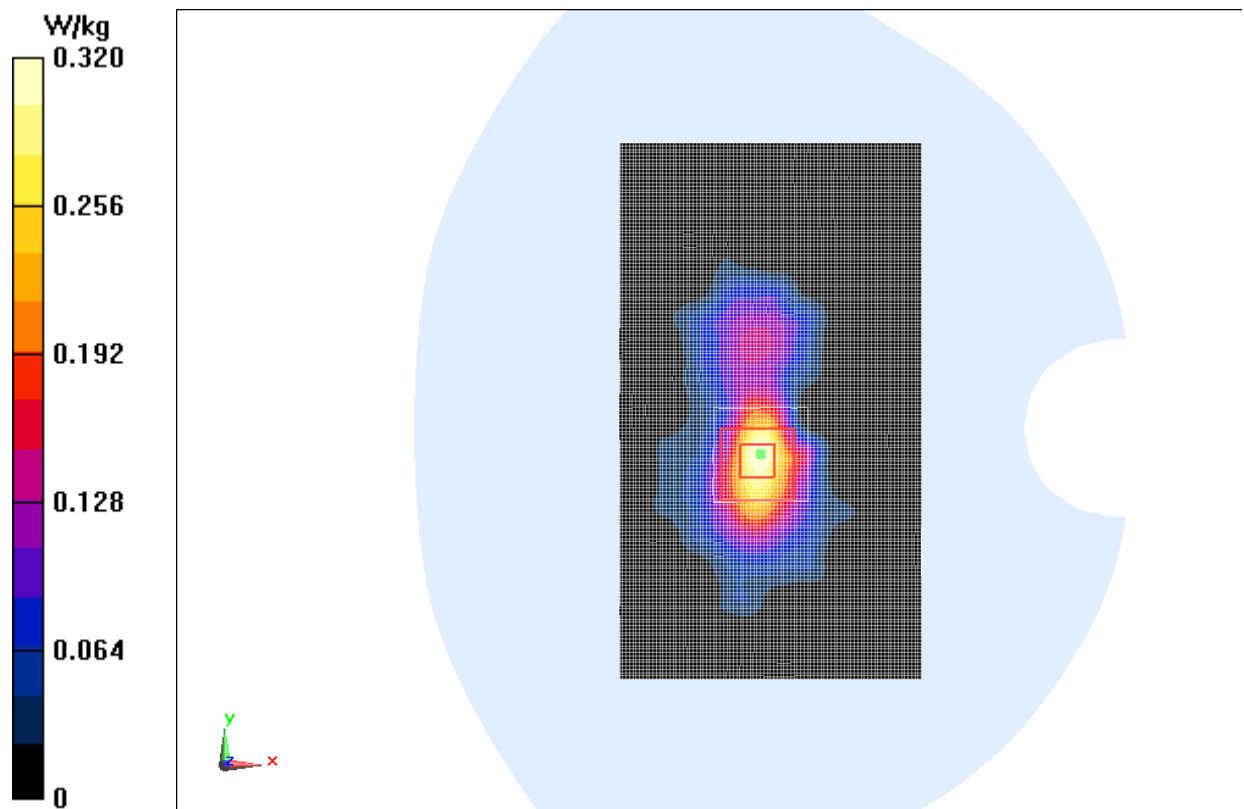


Fig.12 5GHz CH36

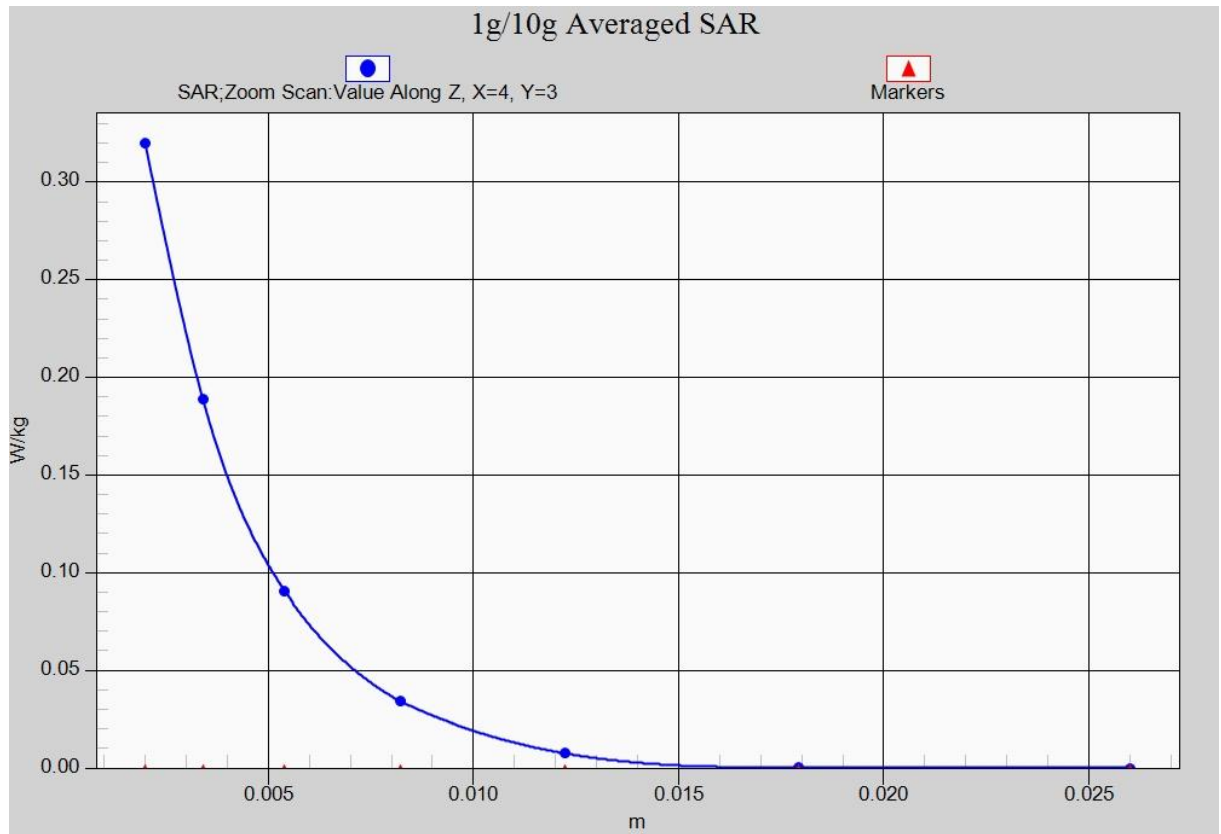


Fig. 12-1 Z-Scan at power reference point (5GHz CH36)

ANNEX B System Verification Results

835MHz

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 40.28$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(8.92, 8.92, 8.92)

System Validation/Area Scan (81x161x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 53.657 V/m ; Power Drift = 0.15 dB

Fast SAR: SAR(1 g) = 2.34 W/kg ; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (interpolated) = 2.57 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.657 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.31 W/kg ; SAR(10 g) = 1.50 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

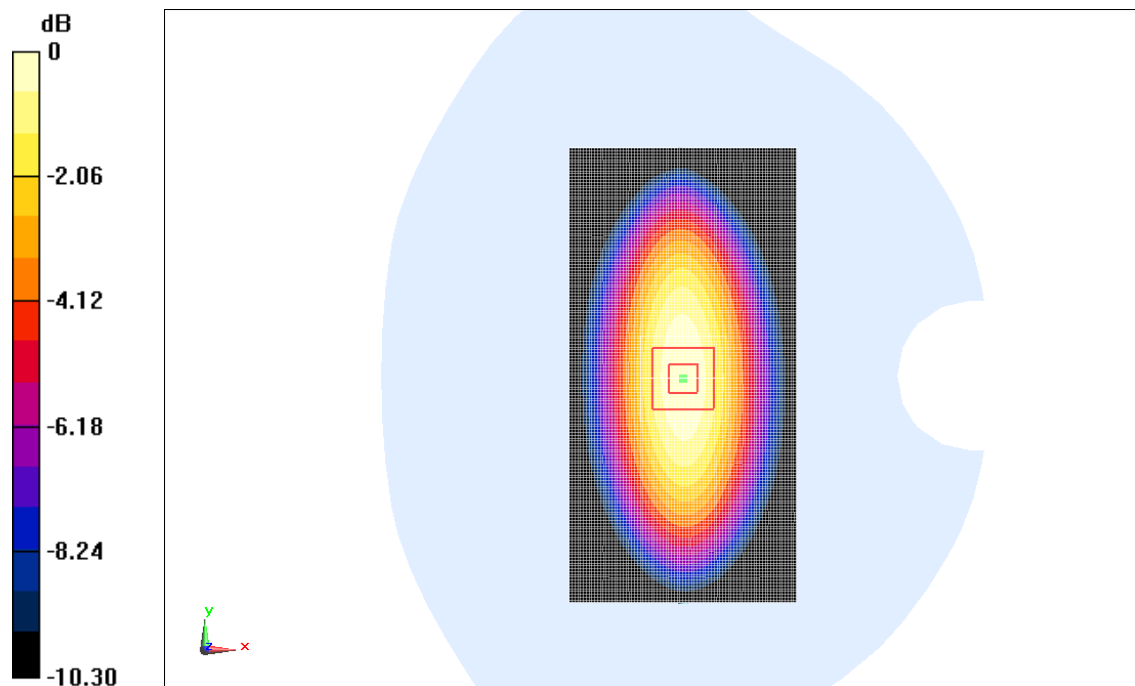

0 dB = 2.57 W/kg = 8.20 dBW/kg

Fig.B.1 validation 835MHz 250mW

835MHz

Date: 2013-10-2

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 56.51$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(8.73, 8.73, 8.73)

System Validation /Area Scan (81x171x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 51.811 V/m ; Power Drift = 0.08 dB

Fast SAR: SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (interpolated) = 2.61 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.811 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 2.39 W/kg ; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 2.63 W/kg

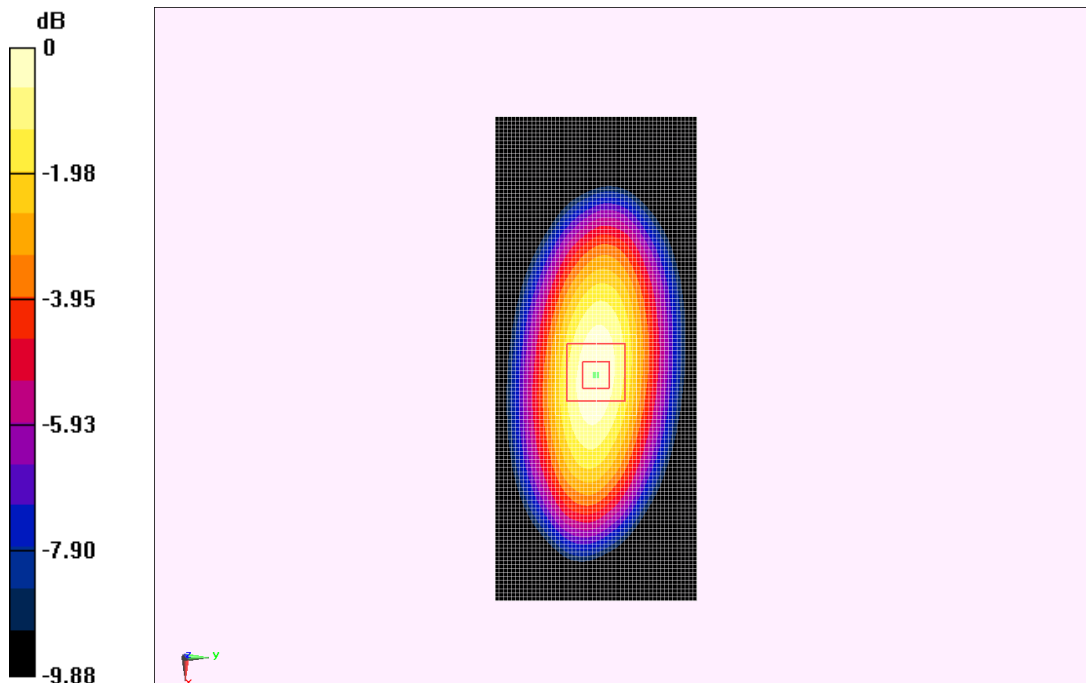

0 dB = 2.61 W/kg = 8.33 dBW/kg

Fig.B.2 validation 835MHz 250mW

1900MHz

Date: 2013-10-3

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.418 \text{ mho/m}$; $\epsilon_r = 39.29$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(7.57, 7.57, 7.57)

System Validation/Area Scan (81x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 100.59 V/m ; Power Drift = -0.10 dB

Fast SAR: SAR(1 g) = 9.98 W/kg ; SAR(10 g) = 5.32 W/kg

Maximum value of SAR (interpolated) = 11.5 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 100.59 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 18.24 W/kg

SAR(1 g) = 9.88 W/kg ; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 11.4 W/kg

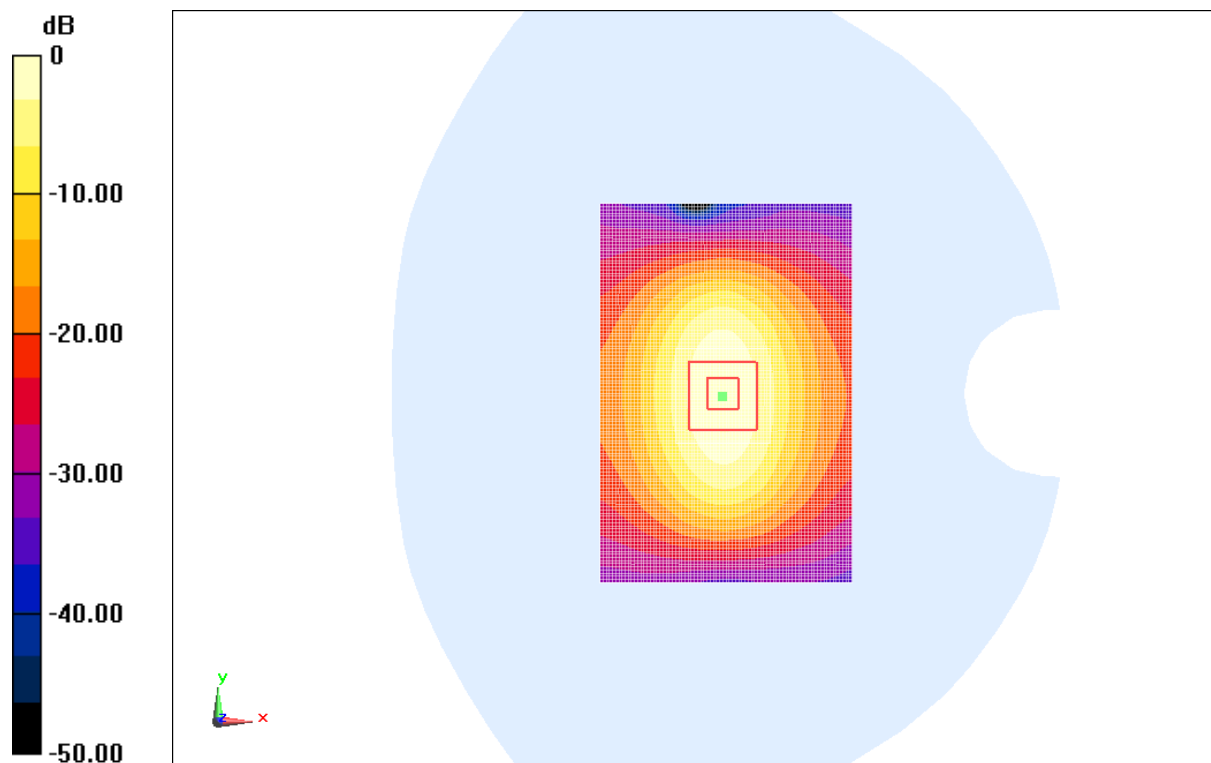

0 dB = 11.5 W/kg = 21.21 dB W/kg

Fig.B.3 validation 1900MHz 250mW

1900MHz

Date: 2013-10-3

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.537 \text{ mho/m}$; $\epsilon_r = 52.34$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.4°C Liquid Temperature: 21.9°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(7.03, 7.03, 7.03)

System Validation/Area Scan (81x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 84.861 V/m ; Power Drift = -0.07 dB

Fast SAR: SAR(1 g) = 10.1 W/kg ; SAR(10 g) = 5.34 W/kg

Maximum value of SAR (interpolated) = 11.5 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.861 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 17.43 W/kg

SAR(1 g) = 10.2 W/kg ; SAR(10 g) = 5.40 W/kg

Maximum value of SAR (measured) = 11.6 W/kg

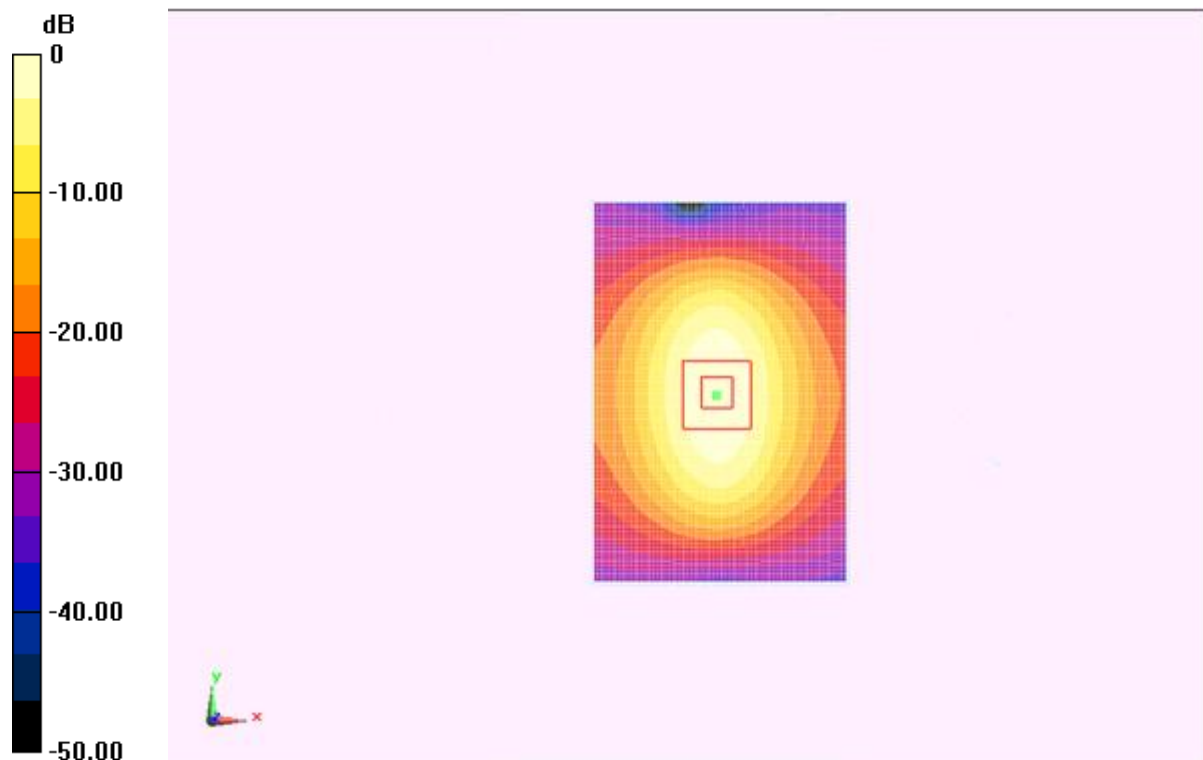

0 dB = 11.5 W/kg = 21.21 dBW/kg

Fig.B.4 validation 1900MHz 250mW

2450MHz

Date: 2013-9-28

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r = 38.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.6°C Liquid Temperature: 22.1°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(7.13, 7.13, 7.13)

System Validation /Area Scan (81x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 14.9 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.375 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 26.03 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 14.8 W/kg

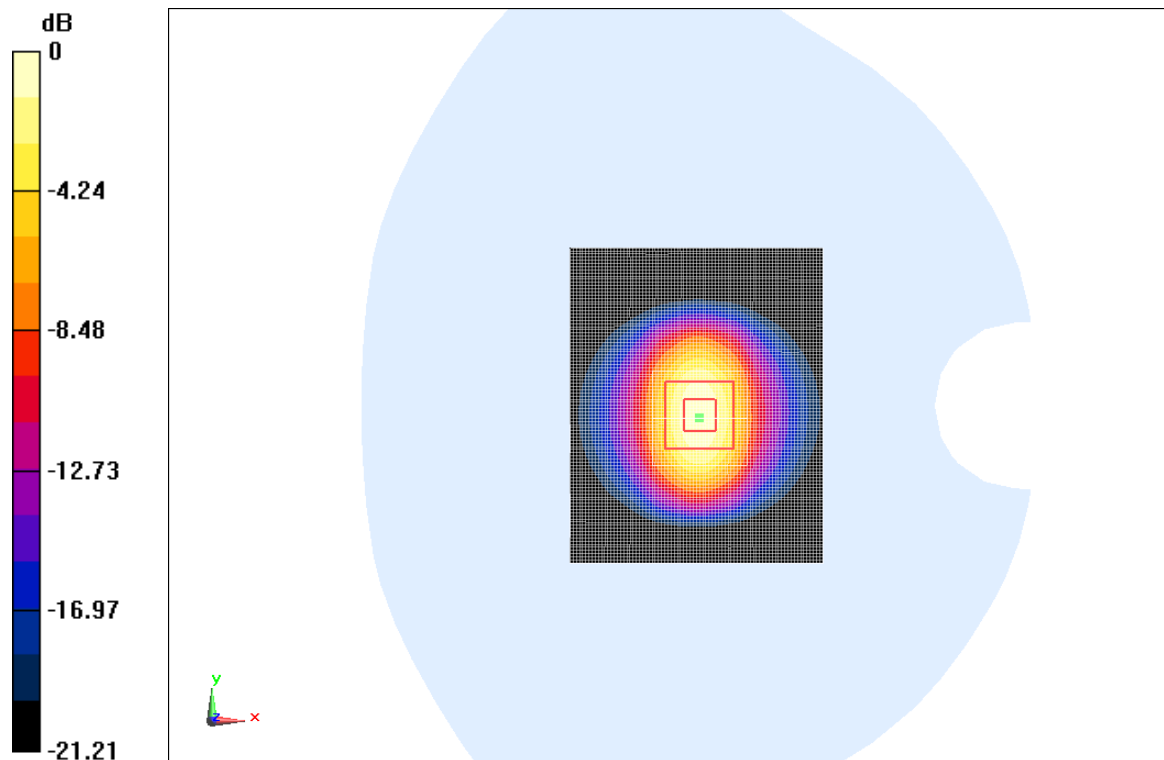

0 dB = 14.9 W/kg = 23.46 dB W/kg

Fig.B.5 validation 2450MHz 250mW

2450MHz

Date: 2013-9-28

Electronics: DAE4 Sn771

Medium: Body 2450 MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.973 \text{ mho/m}$; $\epsilon_r = 53.28$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.6°C Liquid Temperature: 22.1°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(7.00, 7.00, 7.00)

System Validation/Area Scan (81x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 14.8 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 94.708 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 25.94 W/kg

SAR(1 g) = 12.8 W/kg ; SAR(10 g) = 5.98 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

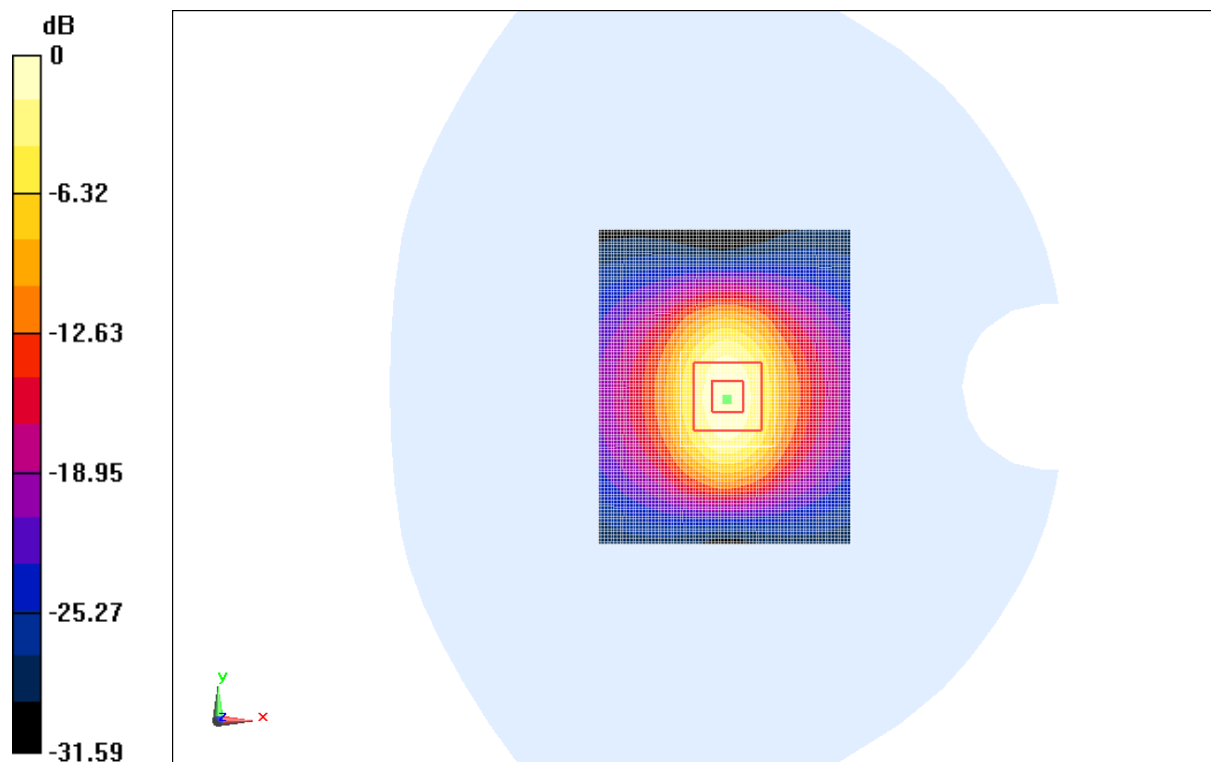

0 dB = 14.8 W/kg = 23.41 dB W/kg

Fig.B.6 validation 2450MHz 250mW

5200MHz

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Head 5200 MHz

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.581 \text{ mho/m}$; $\epsilon_r = 36.64$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 5200 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(5.25, 5.25, 5.25)

System Validation /Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 9.82 W/kg


System Validation /Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$,
 $dz=4\text{mm}$

Reference Value = 61.774 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 35.01 W/kg

SAR(1 g) = 8.15 W/kg ; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 9.84 W/kg

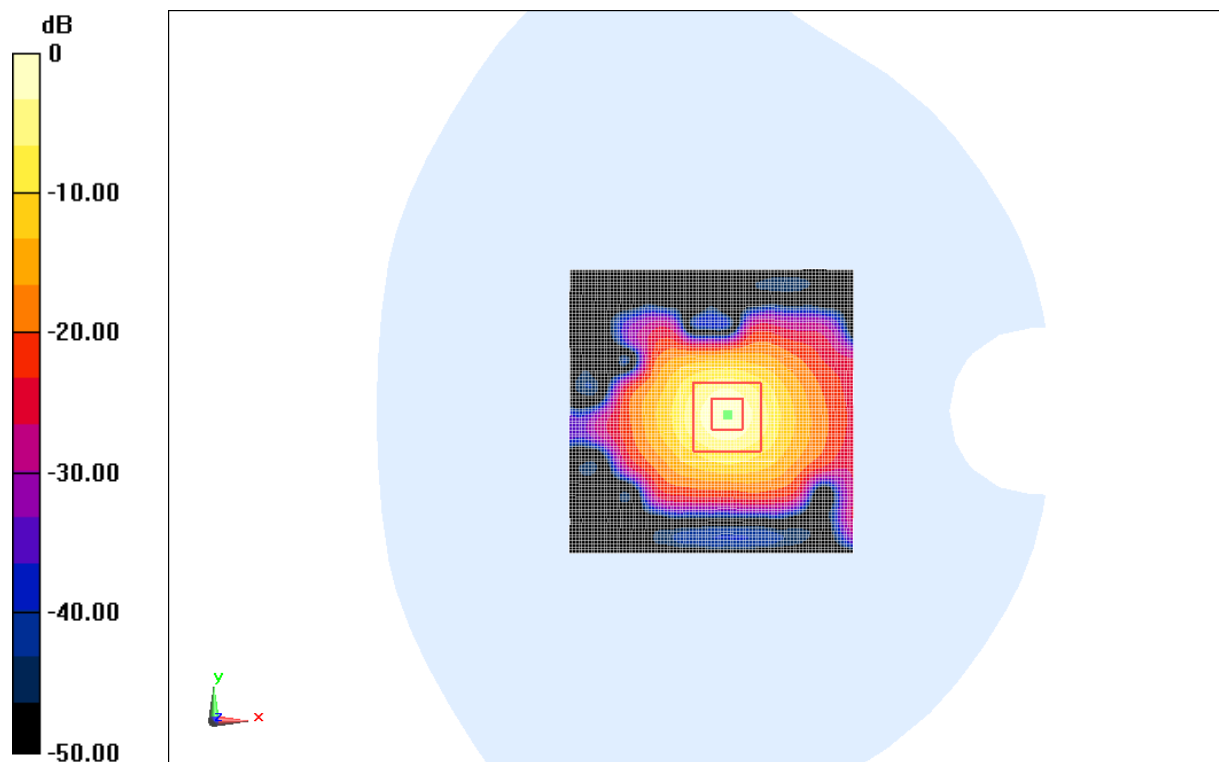

0 dB = 9.82 W/kg = 19.84 dB W/kg

Fig.B.7 validation 5200MHz 100mW

5200MHz

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Body 5200 MHz

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.178 \text{ mho/m}$; $\epsilon_r = 50.62$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 5200 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(4.36, 4.36, 4.36)

System Validation /Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 8.95 W/kg


System Validation /Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=4\text{mm}$

Reference Value = 58.885 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.23 W/kg

SAR(1 g) = 7.34 W/kg ; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 9.01 W/kg

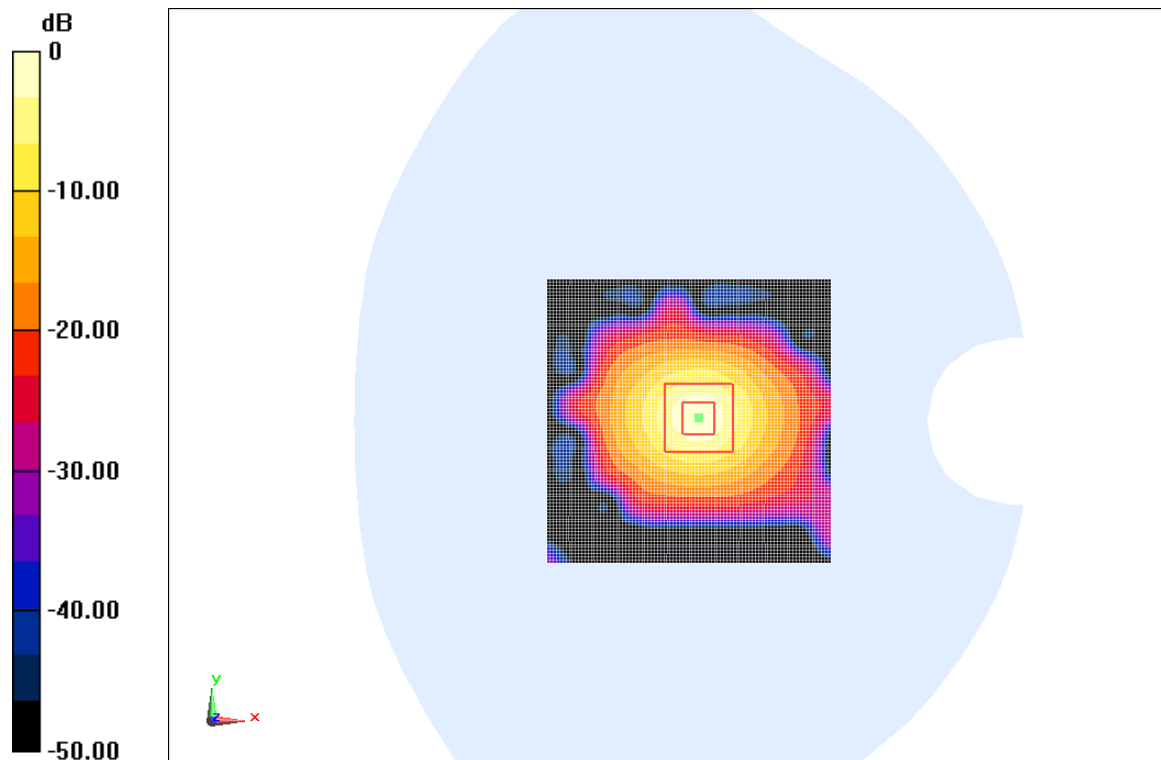

0 dB = $8.95 \text{ W/kg} = 19.04 \text{ dB W/kg}$

Fig.B.8 validation 5200MHz 100mW

5800MHz

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Head 5800 MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.377 \text{ mho/m}$; $\epsilon_r = 35.34$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 5800 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(4.51, 4.51, 4.51)

System Validation /Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 9.53 W/kg


System Validation /Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$,
 $dz=4\text{mm}$

Reference Value = 52.276 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 33.64 W/kg

SAR(1 g) = 7.74 W/kg ; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 9.58 W/kg

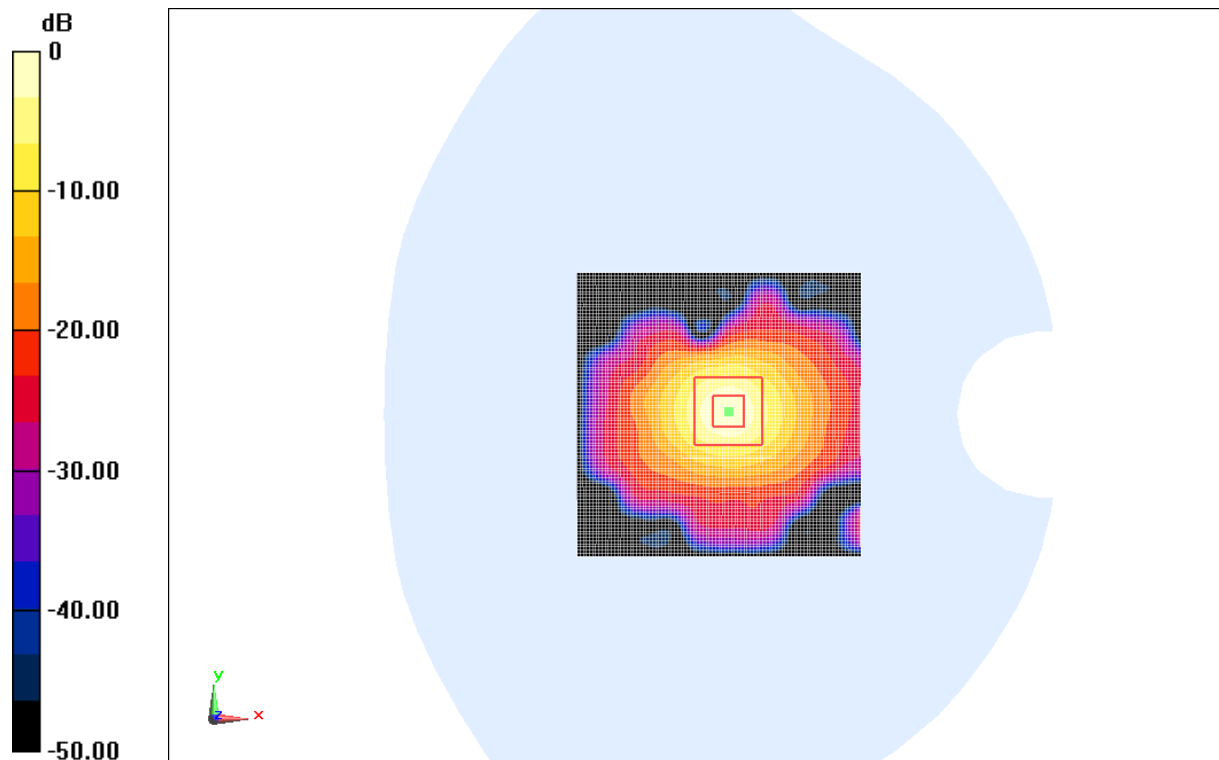

$0 \text{ dB} = 9.53 \text{ W/kg} = 19.58 \text{ dB W/kg}$

Fig.B.9 validation 5800MHz 100mW

5800MHz

Date: 2013-10-1

Electronics: DAE4 Sn771

Medium: Body 5800 MHz

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.138 \text{ mho/m}$; $\epsilon_r = 49.31$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Communication System: CW Frequency: 5800 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(3.94, 3.94, 3.94)

System Validation /Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 9.07 W/kg


System Validation /Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=4\text{mm}$

Reference Value = 61.125 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.76 W/kg

SAR(1 g) = 7.52 W/kg ; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 9.12 W/kg

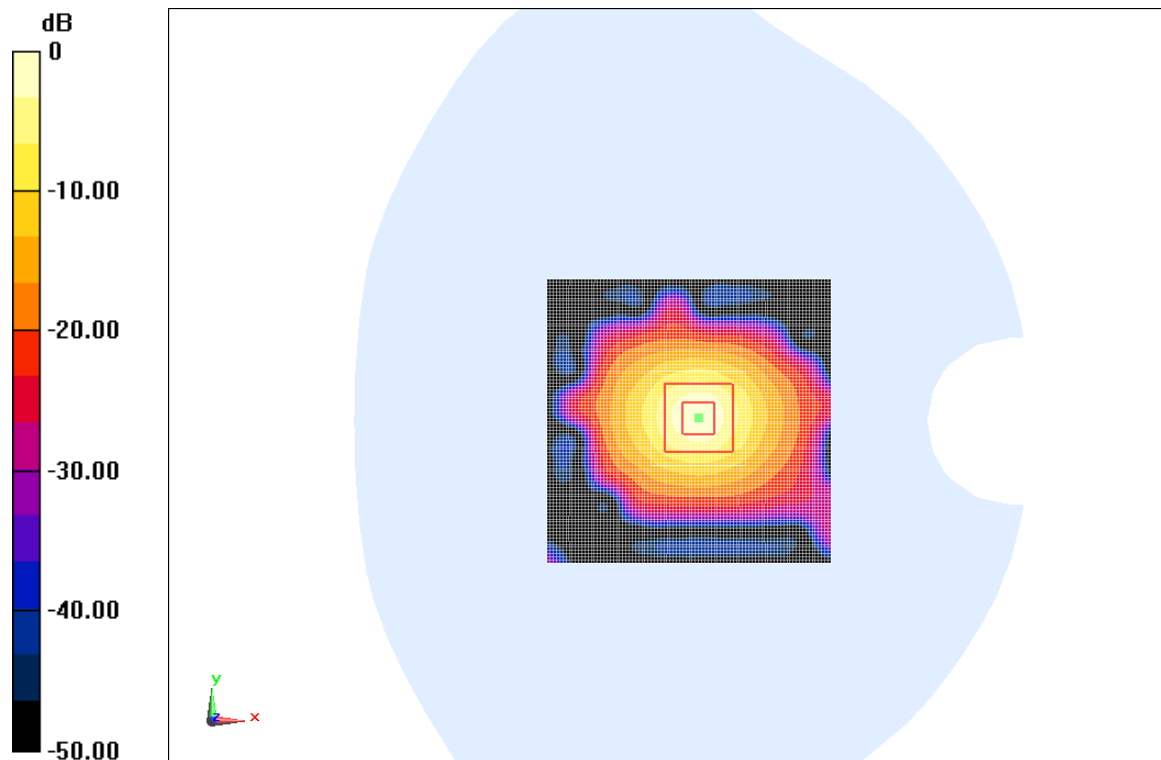

0 dB = 9.07 W/kg = 19.15 dB W/kg

Fig.B.10 validation 5800MHz 100mW

2600MHz

Date: 2014-1-8

Electronics: DAE4 Sn771

Medium: Head 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.985$ mho/m; $\epsilon_r = 38.34$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.68, 6.68, 6.68)

System Validation /Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 16.5 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.856 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 31.10 mW/g

SAR(1 g) = 14.3 mW/g; SAR(10 g) = 6.54 mW/g

Maximum value of SAR (measured) = 16.4 mW/g

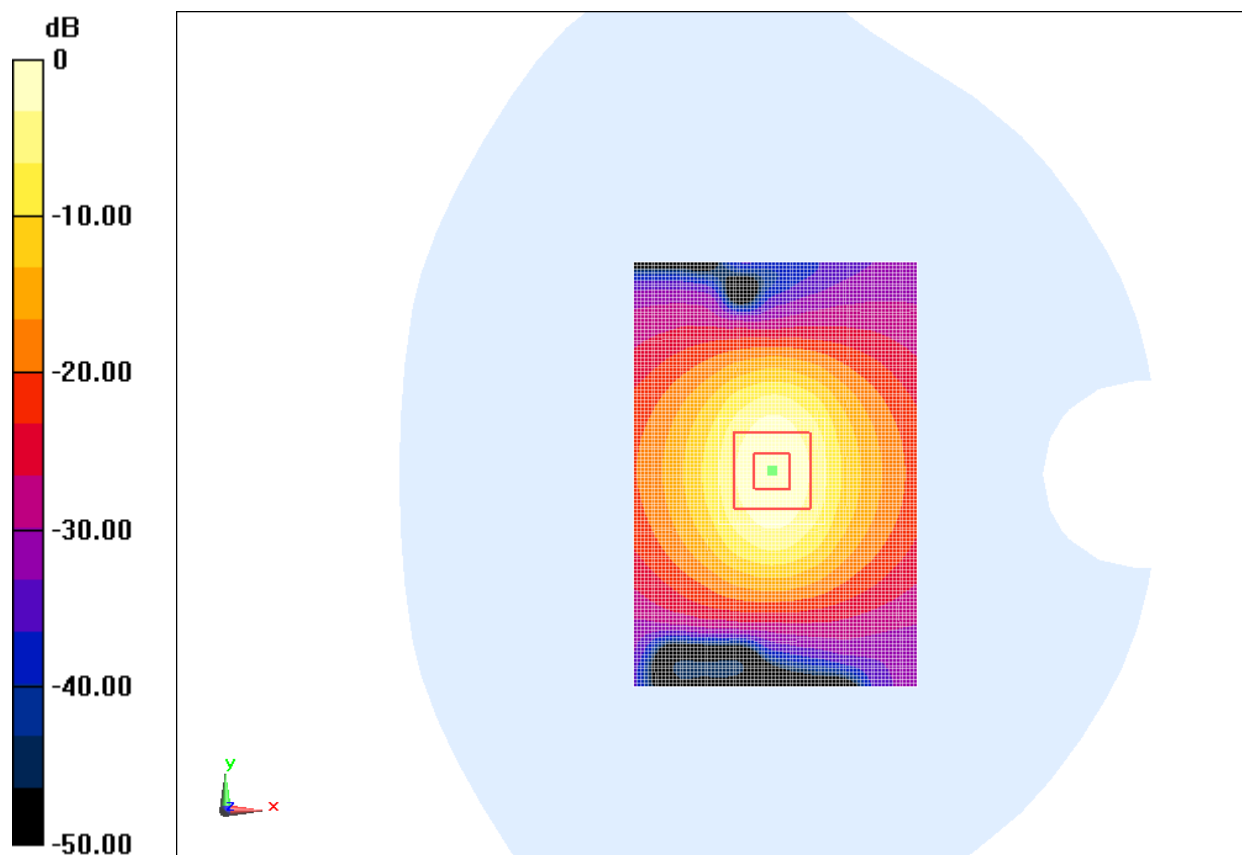

0 dB = 16.5 mW/g = 24.35 dB mW/g

Fig.B.11 validation 2600MHz 250mW

2600MHz

Date: 2014-01-08

Electronics: DAE4 Sn771

Medium: Body 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.174$ mho/m; $\epsilon_r = 52.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(6.59, 6.59, 6.59)

System Validation /Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 16.7 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.838 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 31.65 mW/g

SAR(1 g) = 14.4 mW/g; SAR(10 g) = 6.39 mW/g

Maximum value of SAR (measured) = 16.6 mW/g

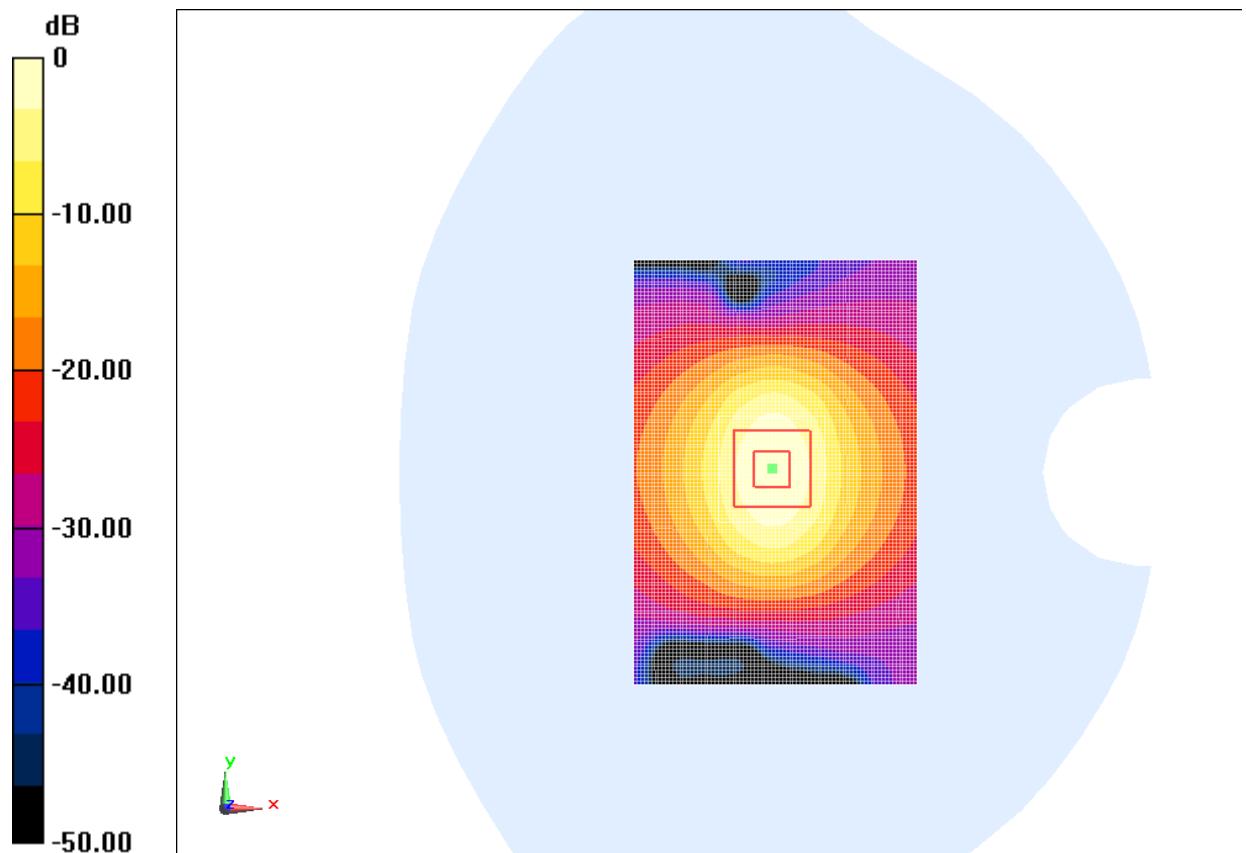

0 dB = 16.7 mW/g = 24.45 dB mW/g

Fig.B.12 validation 2600MHz 250mW

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.


Table B.1 Comparison between area scan and zoom scan for system verification

Band	Position	Area scan (1g)	Zoom scan (1g)	Drift (%)
835	Head	2.34	2.31	1.30
835	Body	2.35	2.39	-1.67
1900	Head	9.98	9.88	1.01
1900	Body	10.1	10.2	-0.98

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

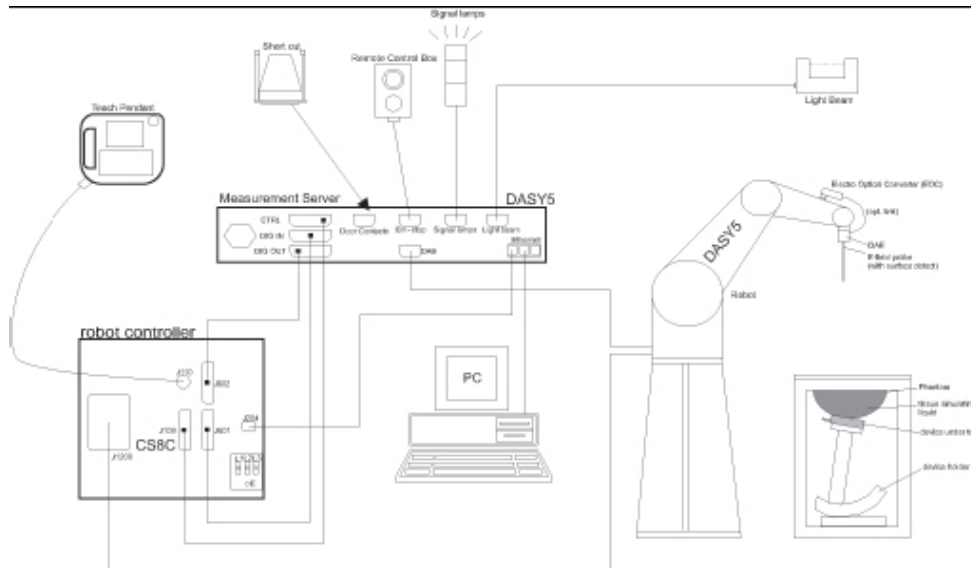

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model:	ES3DV3, EX3DV4
Frequency	10MHz — 6.0GHz(EX3DV4)
Range:	10MHz — 4GHz(ES3DV3)
Calibration:	In head and body simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3
Dynamic Range:	10 mW/kg — 100W/kg
Probe Length:	330 mm
Probe Tip	
Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9 mm for ES3DV3)
Tip-Center:	1 mm (2.0mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm²:

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 4



Picture C.6 DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7 Server for DASY 4



Picture C.8 Server for DASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric


parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.9-1: Device Holder

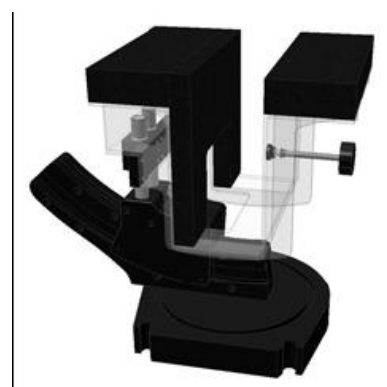

Picture C.9-2: Laptop Extension Kit

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation

of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.10: SAM Twin Phantom

ANNEX D Position of the wireless device in relation to the phantom


D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

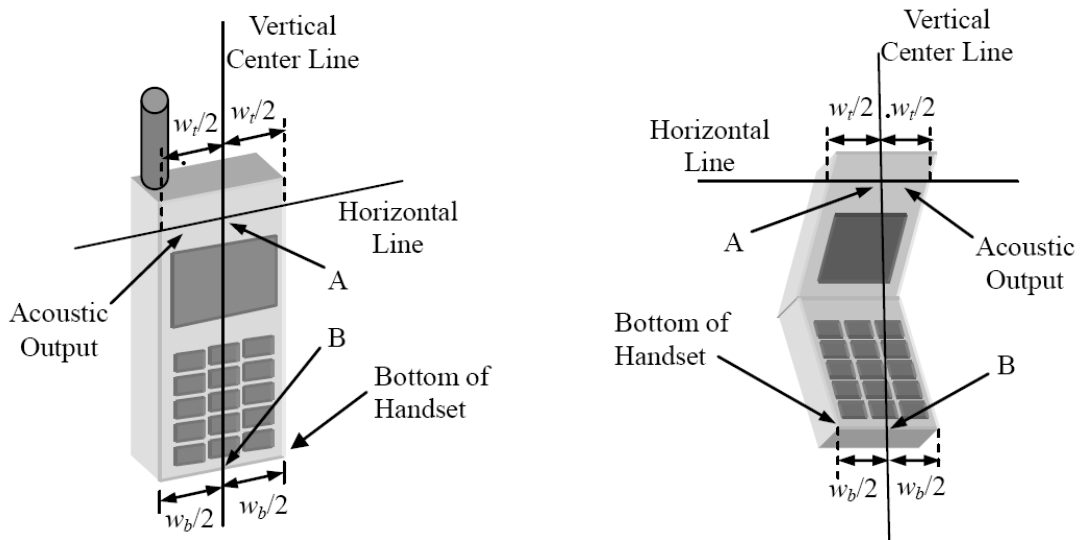


- w_t Width of the handset at the level of the acoustic
- w_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

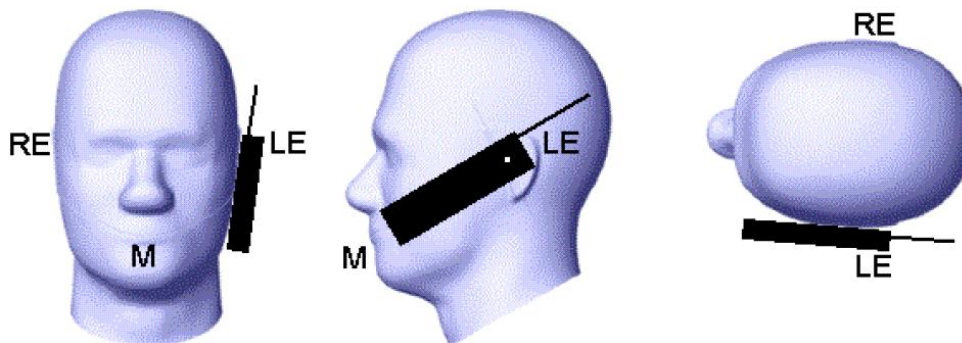


Picture D.2 Cheek position of the wireless device on the left side of SAM

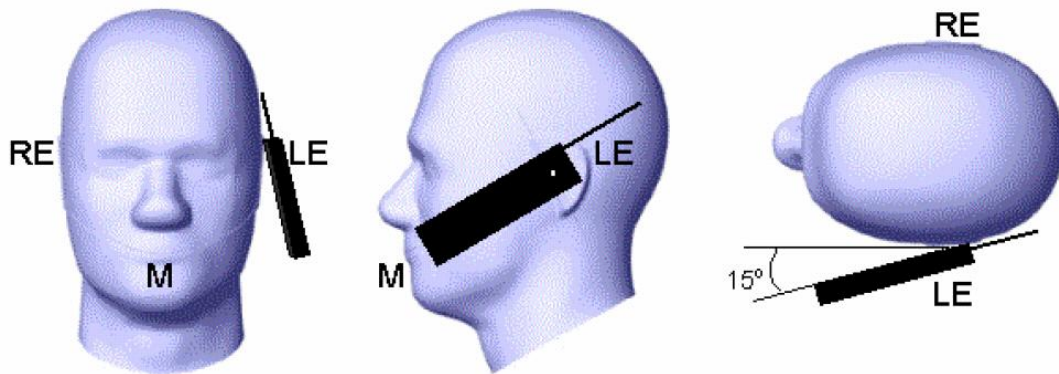

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

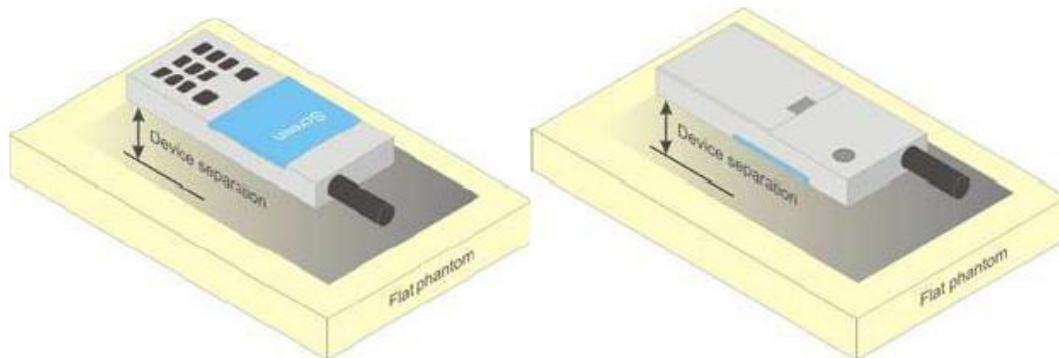


Picture D.4 Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

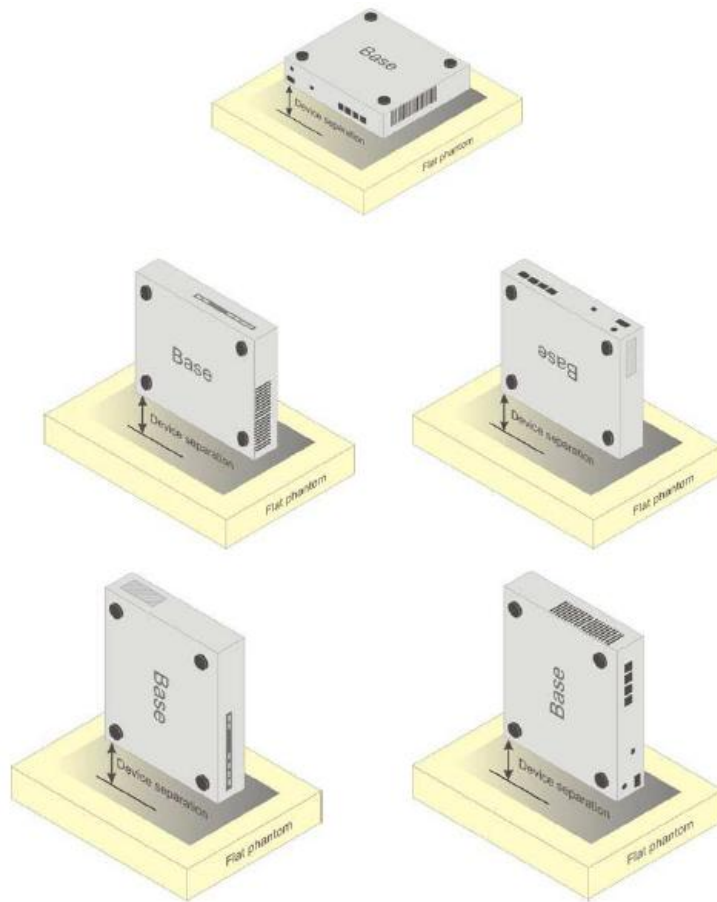

Picture D.5 Test positions for desktop devices

D.4 DUT Setup Photos



Picture D.6

ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body	5800 Head	5800 Body
Ingredients (% by weight)								
Water	41.45	52.5	55.242	69.91	58.79	72.60	65.53	65.53
Sugar	56.0	45.0	\	\	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18	\	\
Preventol	0.1	0.1	\	\	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22	\	\
Diethyenglycol monohexylether	\	\	\	\	\	\	17.24	17.24
Triton X-100	\	\	\	\	\	\	17.24	17.24
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$	$\epsilon=35.3$ $\sigma=5.27$	$\epsilon=48.2$ $\sigma=6.00$

ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation

Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
3846	Head 750MHz	Mar. 06, 2013	750 MHz	OK
3846	Head 850MHz	Mar. 06, 2013	850 MHz	OK
3846	Head 900MHz	Mar. 01, 2013	900 MHz	OK
3846	Head 1750MHz	Mar. 03, 2013	1750 MHz	OK
3846	Head 1810MHz	Mar. 03, 2013	1810 MHz	OK
3846	Head 1900MHz	Mar. 07, 2013	1900 MHz	OK
3846	Head 1950MHz	Mar. 04, 2013	1950 MHz	OK
3846	Head 2000MHz	Mar. 04, 2013	2000 MHz	OK
3846	Head 2100MHz	Mar. 05, 2013	2100 MHz	OK
3846	Head 2300MHz	Mar. 05, 2013	2300 MHz	OK
3846	Head 2450MHz	Mar. 02, 2013	2450 MHz	OK
3846	Head 2550MHz	Mar. 08, 2013	2550 MHz	OK
3846	Head 2600MHz	Mar. 08, 2013	2600 MHz	OK
3846	Head 3500MHz	Mar. 09, 2013	3500 MHz	OK
3846	Head 3700MHz	Mar. 09, 2013	3700 MHz	OK
3846	Head 5200MHz	Mar. 10, 2013	5200 MHz	OK
3846	Head 5500MHz	Mar. 10, 2013	5500 MHz	OK
3846	Head 5800MHz	Mar. 10, 2013	5800 MHz	OK
3846	Body 750MHz	Mar. 06, 2013	750 MHz	OK
3846	Body 850MHz	Mar. 06, 2013	850 MHz	OK
3846	Body 900MHz	Mar. 01, 2013	900 MHz	OK
3846	Body 1750MHz	Mar. 03, 2013	1750 MHz	OK
3846	Body 1810MHz	Mar. 03, 2013	1810 MHz	OK
3846	Body 1900MHz	Mar. 07, 2013	1900 MHz	OK
3846	Body 1950MHz	Mar. 04, 2013	1950 MHz	OK
3846	Body 2000MHz	Mar. 04, 2013	2000 MHz	OK
3846	Body 2100MHz	Mar. 05, 2013	2100 MHz	OK
3846	Body 2300MHz	Mar. 05, 2013	2300 MHz	OK
3846	Body 2450MHz	Mar. 02, 2013	2450 MHz	OK
3846	Body 2550MHz	Mar. 08, 2013	2550 MHz	OK
3846	Body 2600MHz	Mar. 08, 2013	2600 MHz	OK
3846	Body 3500MHz	Mar. 09, 2013	3500 MHz	OK
3846	Body 3700MHz	Mar. 09, 2013	3700 MHz	OK
3846	Body 5200MHz	Mar. 10, 2013	5200 MHz	OK
3846	Body 5500MHz	Mar. 10, 2013	5500 MHz	OK
3846	Body 5800MHz	Mar. 10, 2013	5800 MHz	OK