

Fig.A.6.1.83 Conducted Spurious Emission (802.11n-HT40, Ch6, 1 GHz-2.5 GHz)

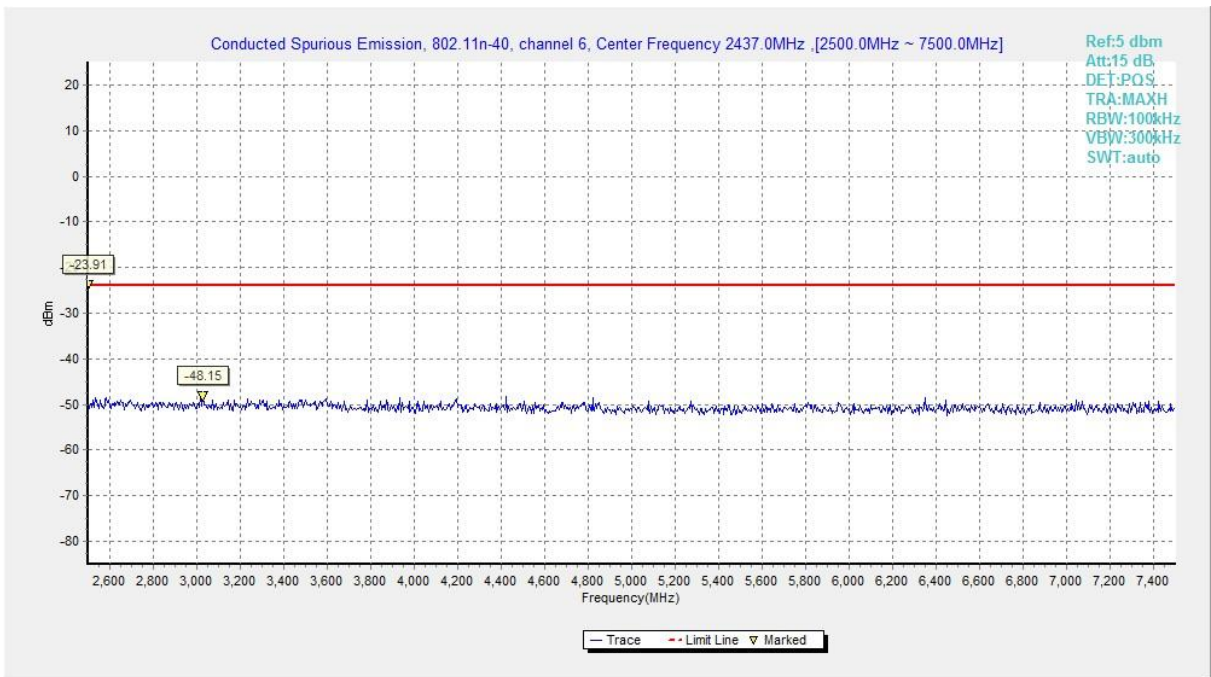


Fig.A.6.1.84 Conducted Spurious Emission (802.11n-HT40, Ch6, 2.5 GHz-7.5 GHz)

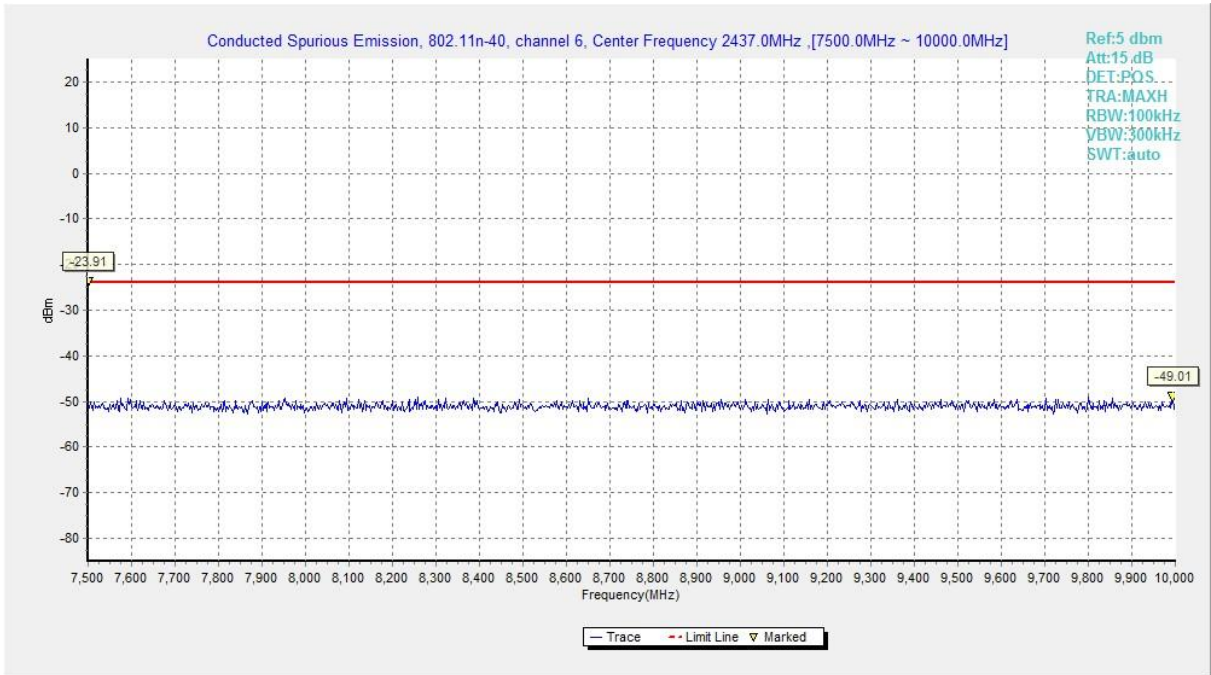


Fig.A.6.1.85 Conducted Spurious Emission (802.11n-HT40, Ch6, 7.5 GHz-10 GHz)

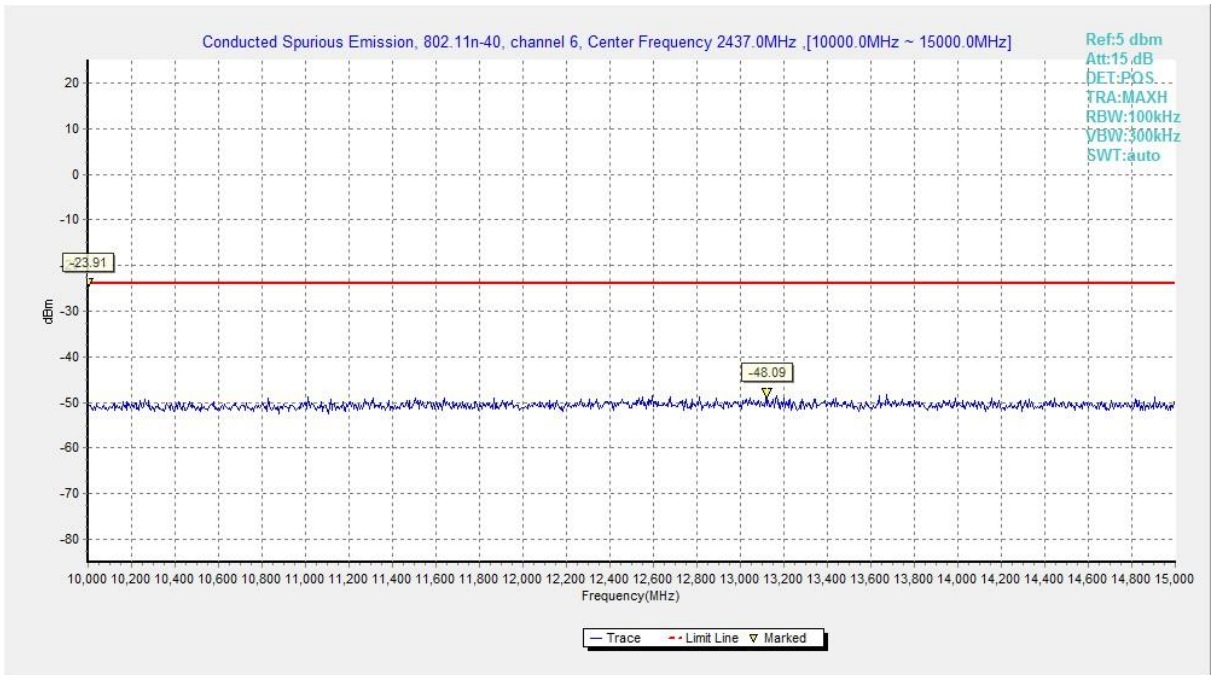


Fig.A.6.1.86 Conducted Spurious Emission (802.11n-HT40, Ch6, 10 GHz-15 GHz)

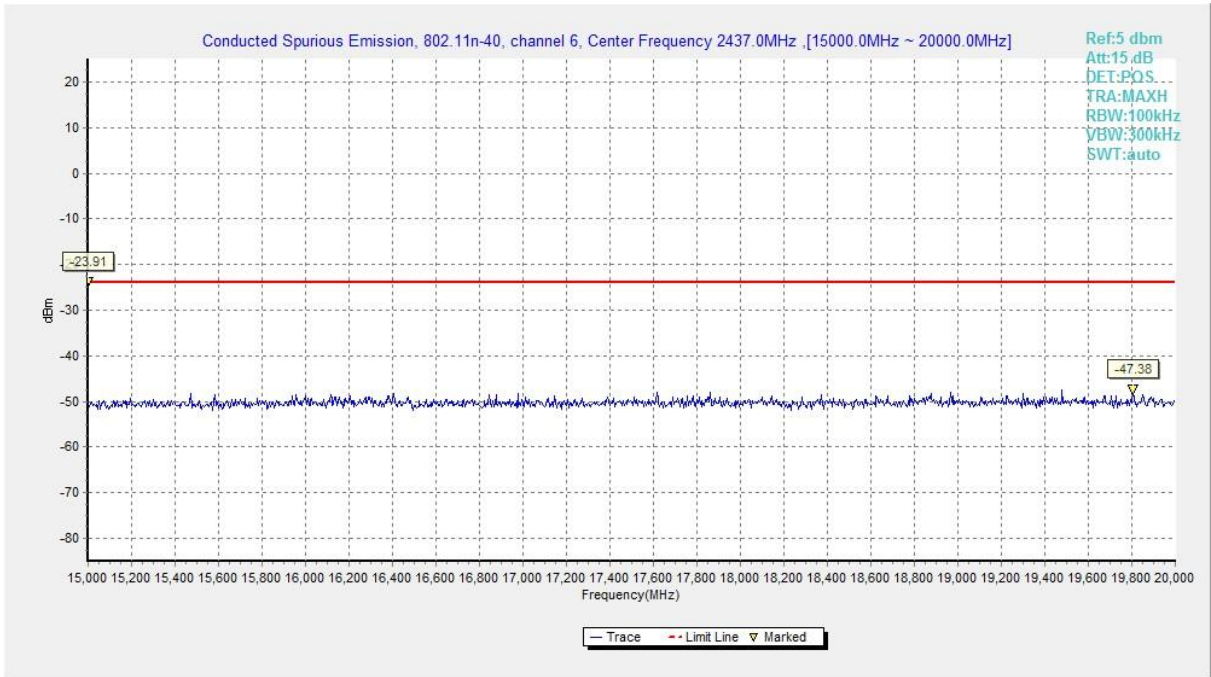


Fig.A.6.1.87 Conducted Spurious Emission (802.11n-HT40, Ch6, 15 GHz-20 GHz)

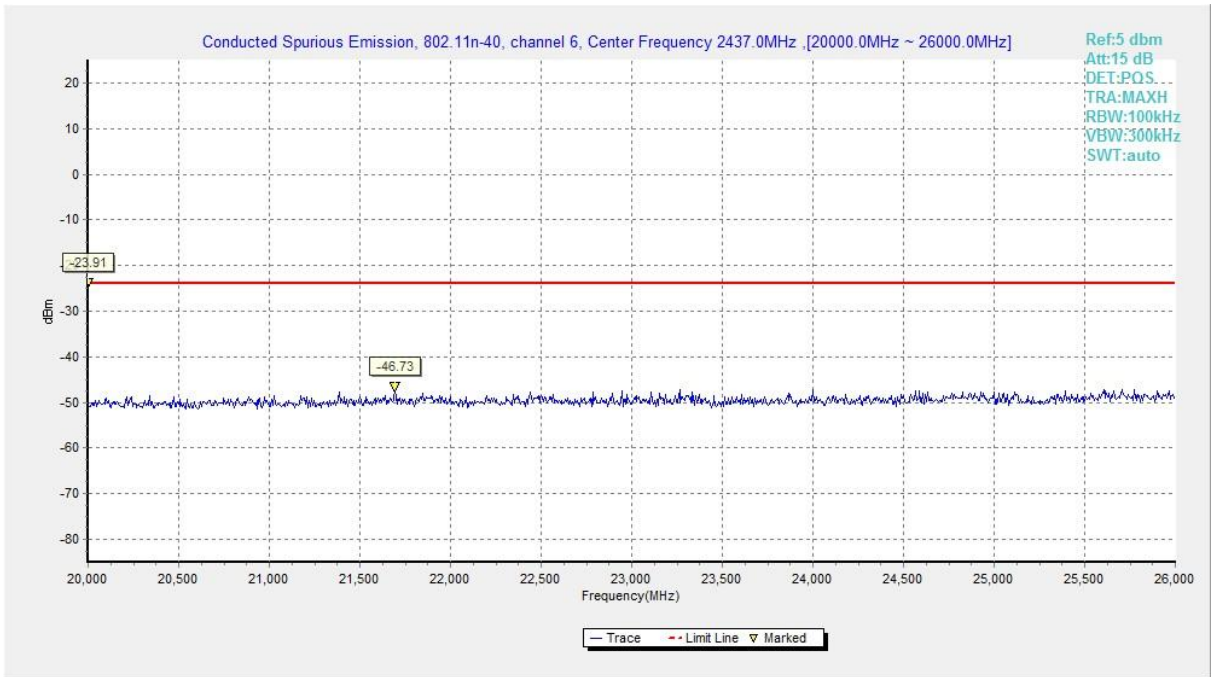


Fig.A.6.1.88 Conducted Spurious Emission (802.11n-HT40, Ch6, 20 GHz-26 GHz)

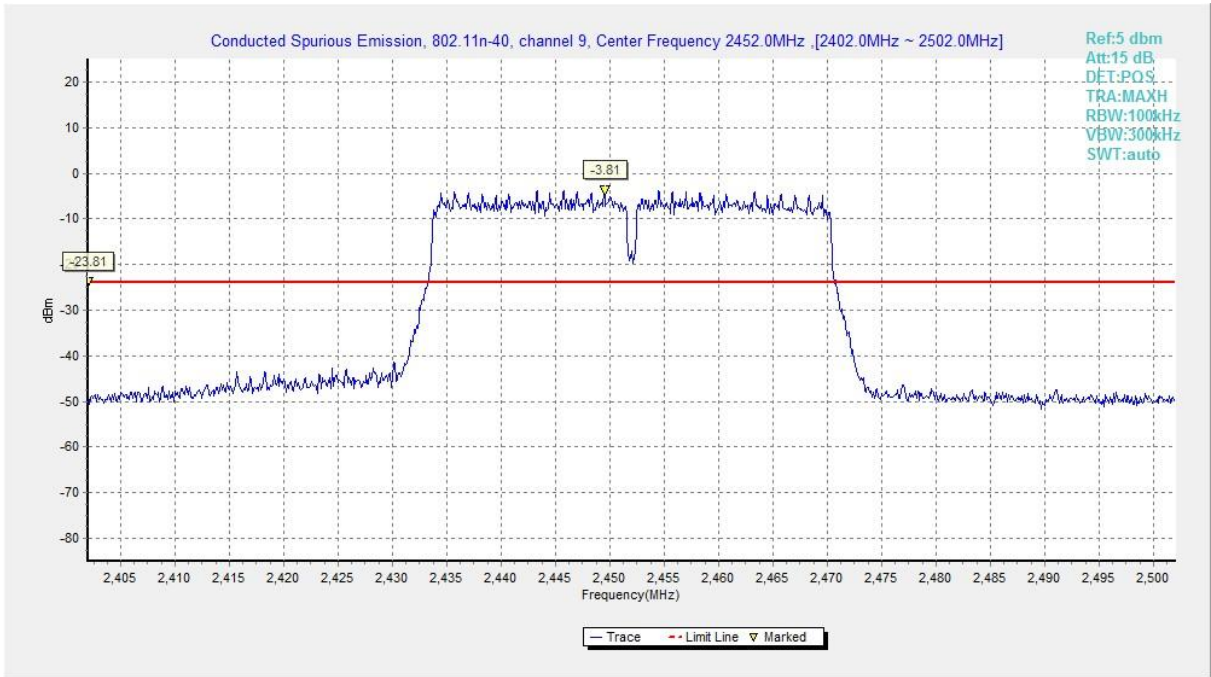


Fig.A.6.1.89 Conducted Spurious Emission (802.11n-HT40, Ch9, Center Frequency)

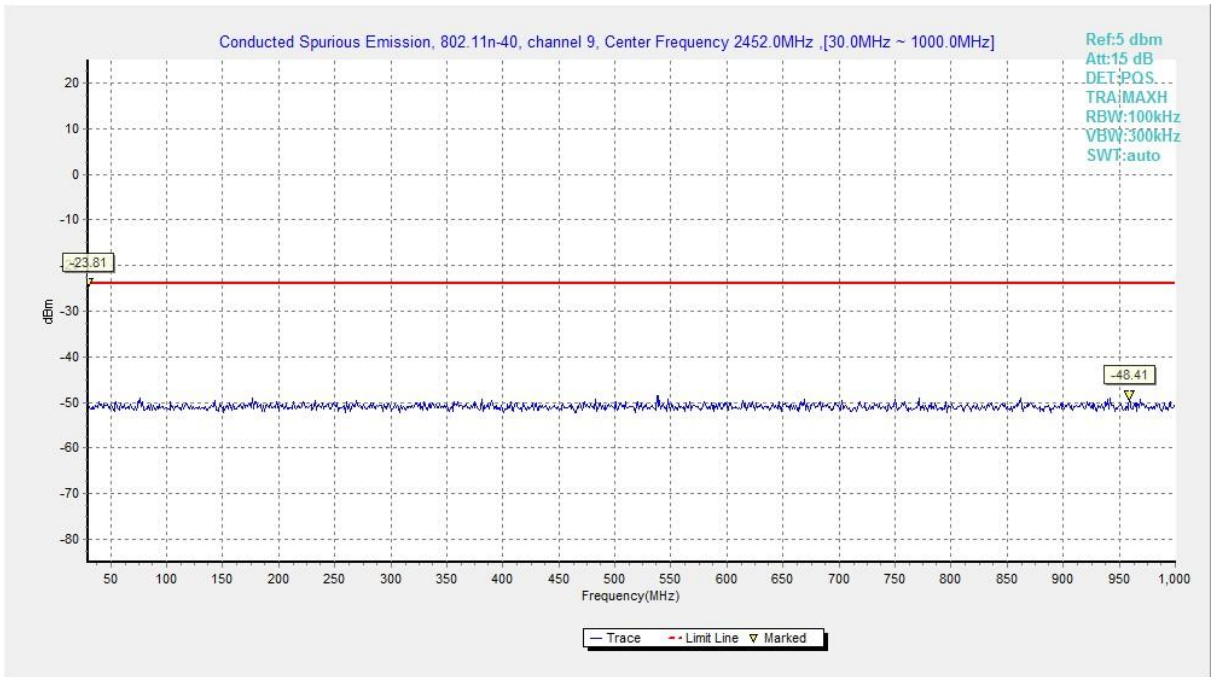


Fig.A.6.1.90 Conducted Spurious Emission (802.11n-HT40, Ch9, 30 MHz-1 GHz)

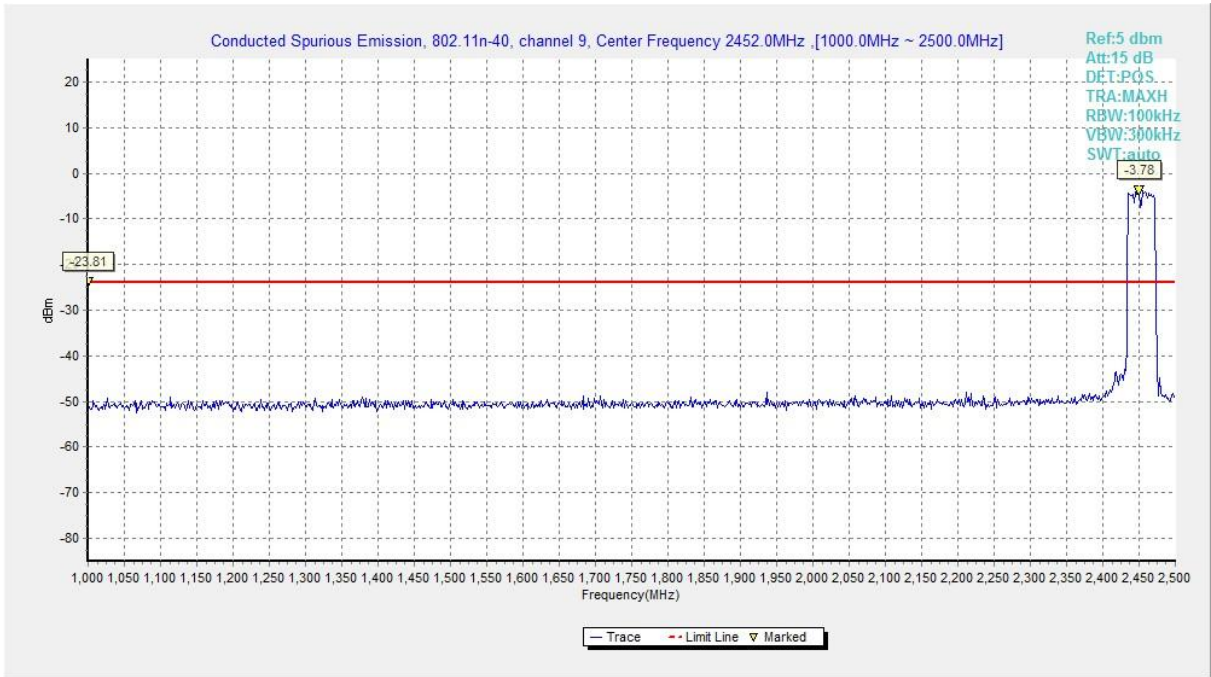


Fig.A.6.1.91 Conducted Spurious Emission (802.11n-HT40, Ch9, 1 GHz-2.5 GHz)

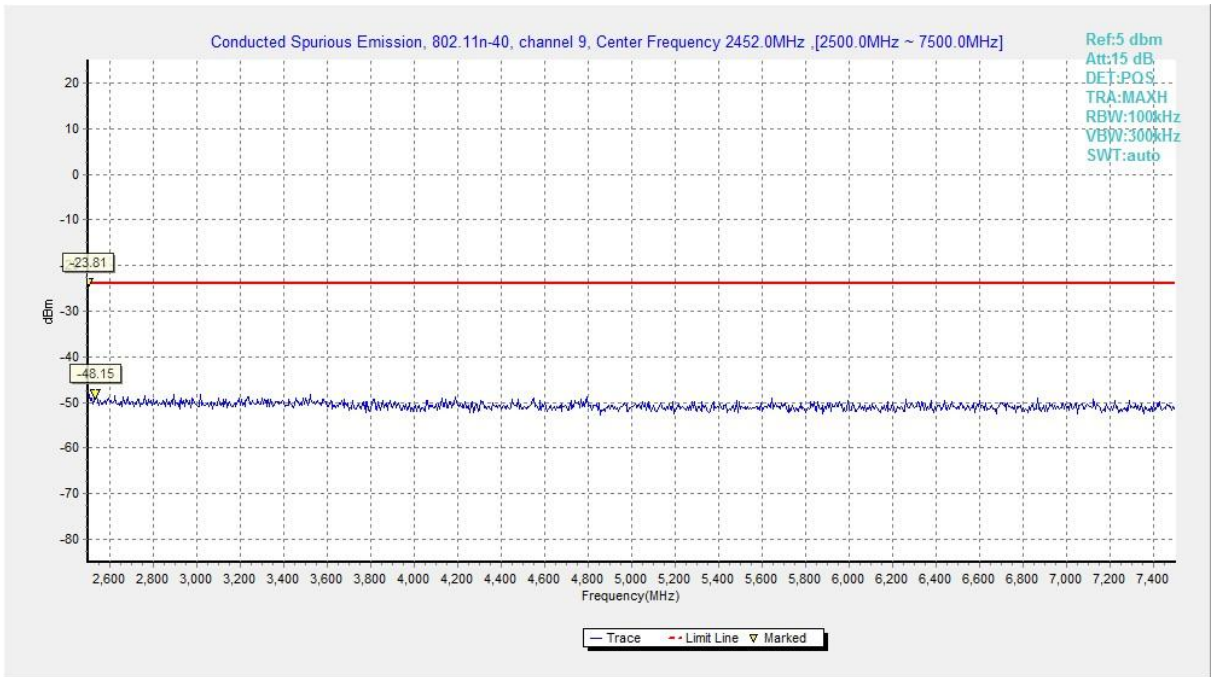


Fig.A.6.1.92 Conducted Spurious Emission (802.11n-HT40, Ch9, 2.5 GHz-7.5 GHz)

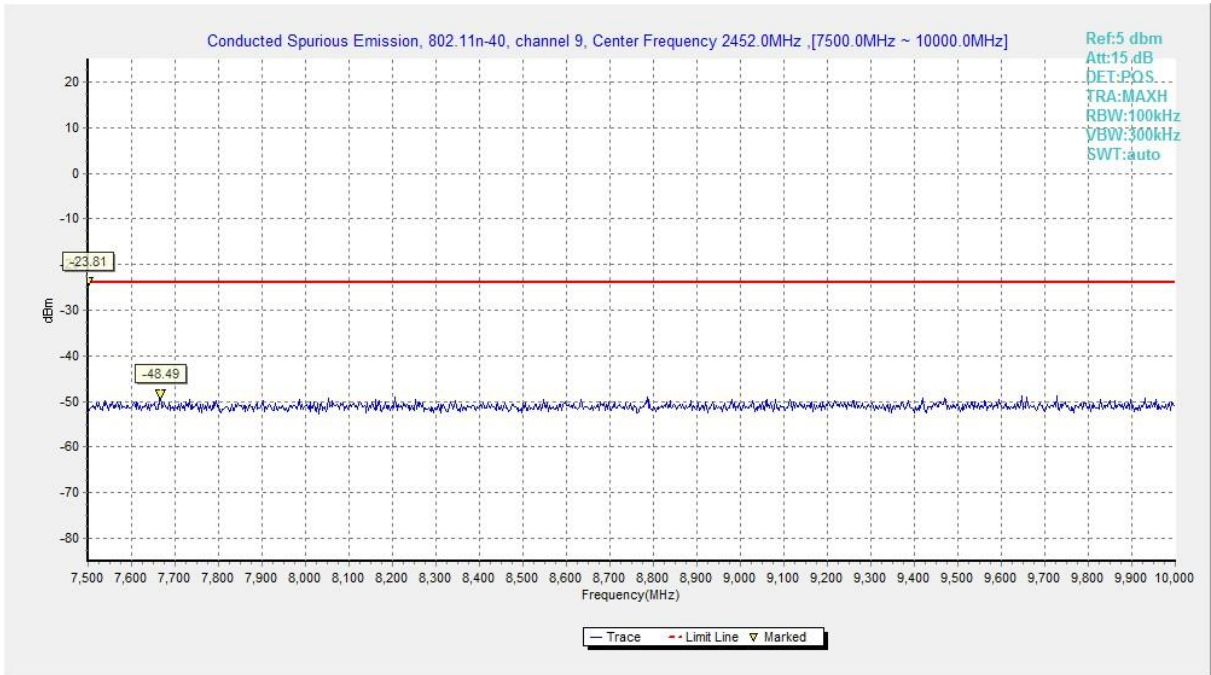


Fig.A.6.1.93 Conducted Spurious Emission (802.11n-HT40, Ch9, 7.5 GHz-10 GHz)

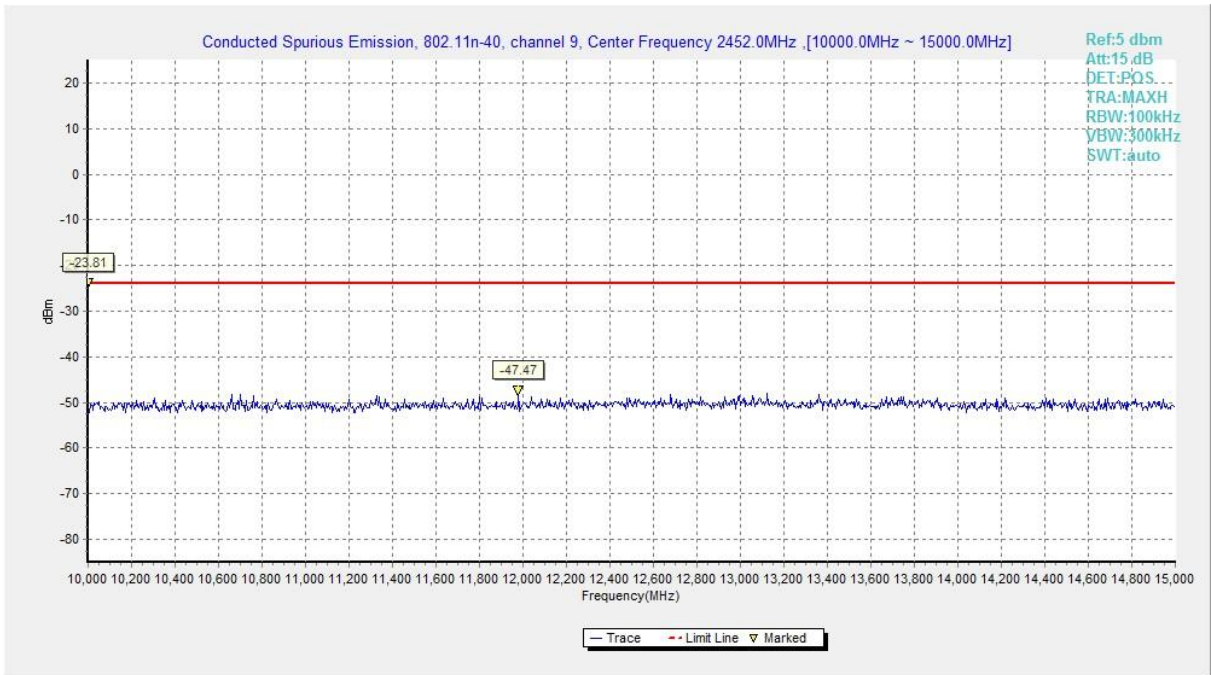


Fig.A.6.1.94 Conducted Spurious Emission (802.11n-HT40, Ch9, 10 GHz-15 GHz)

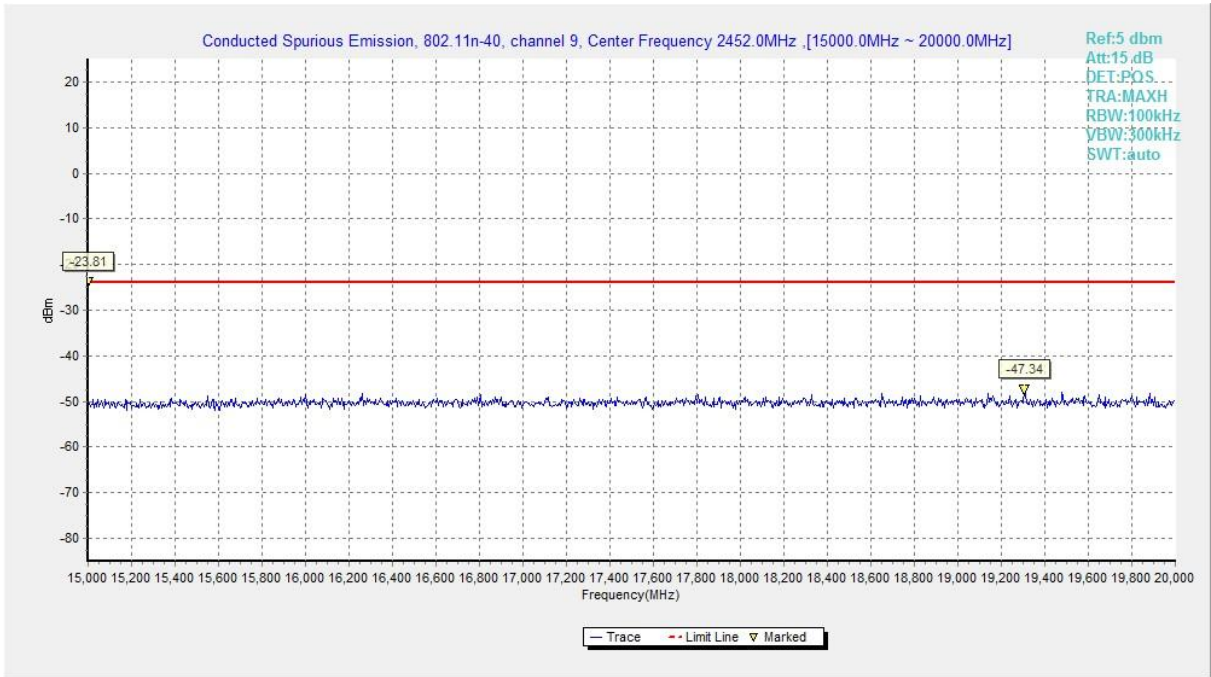


Fig.A.6.1.95 Conducted Spurious Emission (802.11n-HT40, Ch9, 15 GHz-20 GHz)

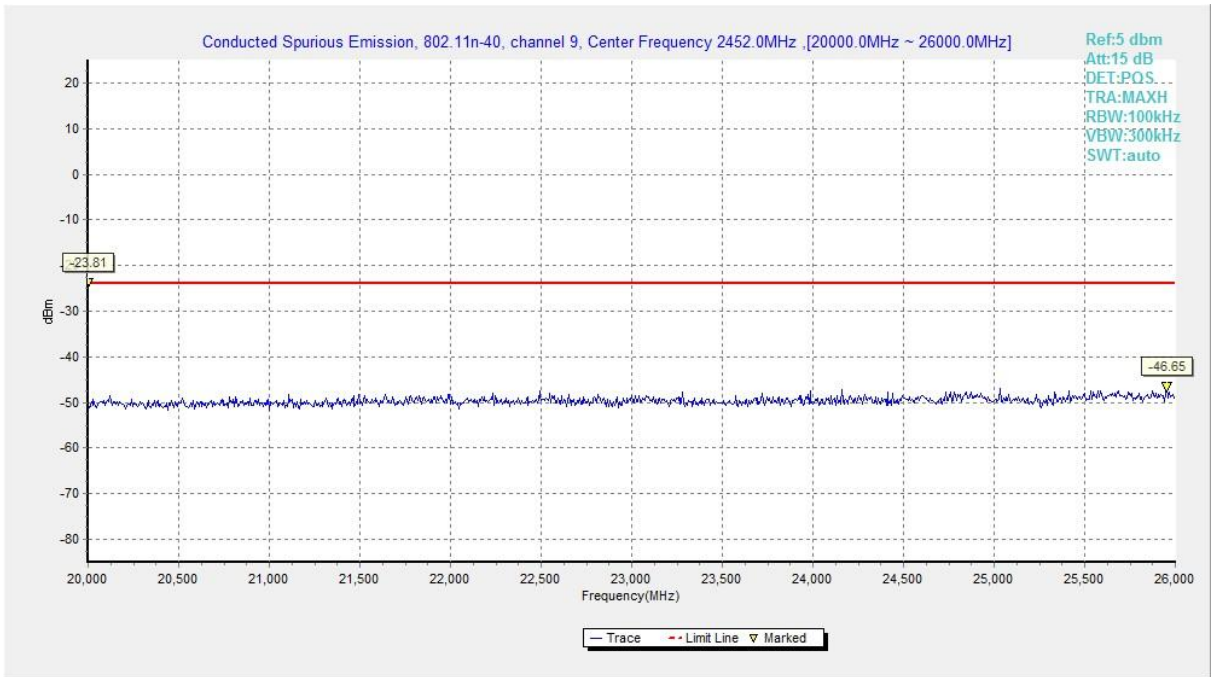


Fig.A.6.1.96 Conducted Spurious Emission (802.11n-HT40, Ch9, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to KDB558074.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID:EUT1

Modulation type and data rate tested:

802.11b	802.11g	802.11n-HT20	802.11n-HT40
11Mbps(CCK)	24Mbps(OFDM)	MCS6(OFDM)	MCS3(OFDM)

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	P
		3 GHz ~ 18 GHz	Fig.A.6.2.3	P
	6	30 MHz ~1 GHz	Fig.A.6.2.4	P
		1 GHz ~ 3 GHz	Fig.A.6.2.5	P
		3 GHz ~ 18 GHz	Fig.A.6.2.6	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.7	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.8	P
		3 GHz ~ 18 GHz	Fig.A.6.2.9	P
	802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.10
1		1 GHz ~ 3 GHz	Fig.A.6.2.11	P
		3 GHz ~ 18 GHz	Fig.A.6.2.12	P
6		30 MHz ~1 GHz	Fig.A.6.2.13	P
		1 GHz ~ 3 GHz	Fig.A.6.2.14	P
		3 GHz ~ 18 GHz	Fig.A.6.2.15	P
Power		2.45GHz ~2.5GHz	Fig.A.6.2.16	P
11		1 GHz ~ 3 GHz	Fig.A.6.2.17	P
		3 GHz ~ 18 GHz	Fig.A.6.2.18	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.19	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.20	P
		3 GHz ~ 18 GHz	Fig.A.6.2.21	P
	6	30 MHz ~1 GHz	Fig.A.6.2.22	P
		1 GHz ~ 3 GHz	Fig.A.6.2.23	P
		3 GHz ~ 18 GHz	Fig.A.6.2.24	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.25	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.26	P
		3 GHz ~ 18 GHz	Fig.A.6.2.27	P
	802.11n (HT40)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.28
1		1 GHz ~ 3 GHz	Fig.A.6.2.29	P
		3 GHz ~ 18 GHz	Fig.A.6.2.30	P
6		30 MHz ~1 GHz	Fig.A.6.2.31	P
		1 GHz ~ 3 GHz	Fig.A.6.2.32	P
		3 GHz ~ 18 GHz	Fig.A.6.2.33	P
Power		2.45GHz ~2.5GHz	Fig.A.6.2.34	P
11		1 GHz ~ 3 GHz	Fig.A.6.2.35	P
	3 GHz ~ 18 GHz	Fig.A.6.2.36	P	
/	All channels	18 GHz~ 26.5 GHz	Fig.A.6.2.37	P

Conclusion: Pass

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
f ≤ 1GHz	3.9
f > 1GHz	4.3

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2386.700	47.4	-38.8	27.7	58.500	H
17803.500	54.4	-18.5	45.6	27.300	V
17776.500	53.8	-18.5	45.6	26.700	H
17986.500	53.2	-17.7	45.6	25.300	V
17995.500	53.0	-17.7	45.6	25.100	V
17982.000	52.9	-17.7	45.6	25.000	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17983.500	53.0	-17.7	45.6	25.100	H
17838.000	52.7	-18.5	45.6	25.600	V
17989.500	52.6	-17.7	45.6	24.700	V
17782.500	52.5	-18.5	45.6	25.400	V
17995.500	52.4	-17.7	45.6	24.500	V
17914.500	52.4	-17.7	45.6	24.500	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2483.875	45.5	-38.9	27.7	56.700	V
17982.000	53.2	-17.7	45.6	25.300	H
17949.000	52.8	-17.7	45.6	24.900	H
17995.500	52.7	-17.7	45.6	24.800	V
17824.500	52.5	-18.5	45.6	25.400	V
17895.000	52.4	-18.5	45.6	25.300	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2389.650	60.5	-38.8	27.7	71.600	H
17736.000	52.9	-18.9	45.6	26.200	V
17806.500	52.7	-18.5	45.6	25.600	V
17809.500	52.6	-18.5	45.6	25.500	V
17776.500	52.6	-18.5	45.6	25.500	V
17982.000	52.5	-17.7	45.6	24.600	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17995.500	53.6	-17.7	45.6	25.700	H
17964.000	53.3	-17.7	45.6	25.400	V
17851.500	52.4	-18.5	45.6	25.300	V
17982.000	52.4	-17.7	45.6	24.500	V
17796.000	52.2	-18.5	45.6	25.100	V
17998.500	52.0	-17.7	45.6	24.100	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.630	62.4	-38.9	27.7	73.600	H
17914.500	53.2	-17.7	45.6	25.300	V
17986.500	52.3	-17.7	45.6	24.400	V
17992.500	52.1	-17.7	45.6	24.200	V
17844.000	52.0	-18.5	45.6	24.900	H
17952.000	52.0	-17.7	45.6	24.100	V

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2389.480	58.2	-38.8	27.7	69.300	V
17817.000	52.7	-18.5	45.6	25.600	V
17979.000	52.3	-17.7	45.6	24.400	V
17808.000	52.1	-18.5	45.6	25.000	H
17764.500	52.0	-18.5	45.6	24.900	V
17809.500	51.9	-18.5	45.6	24.800	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17817.000	53.3	-18.5	45.6	26.200	V
17914.500	52.5	-17.7	45.6	24.600	H
18000.000	52.5	-45.6	44.5	53.566	V
17979.000	52.1	-17.7	45.6	24.200	H
17938.500	52.0	-17.7	45.6	24.100	H
17985.000	51.8	-17.7	45.6	23.900	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2485.850	60.1	-38.9	27.7	71.300	V
17773.500	53.0	-18.5	45.6	25.900	V
17701.500	52.5	-18.9	45.6	25.800	H
17995.500	52.2	-17.7	45.6	24.300	V
17979.000	52.2	-17.7	45.6	24.300	H
17851.500	52.2	-18.5	45.6	25.100	V

802.11n-HT40

Ch3

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2388.180	58.4	-38.8	27.7	69.500	V
17766.000	52.3	-18.5	45.6	25.200	V
17676.000	52.1	-18.9	45.6	25.400	H
17998.500	52.1	-17.7	45.6	24.200	V
17721.000	52.0	-18.9	45.6	25.300	H
17806.500	51.9	-18.5	45.6	24.800	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17979.000	52.1	-17.7	45.6	24.200	V
17992.500	52.1	-17.7	45.6	24.200	H
17968.500	52.0	-17.7	45.6	24.100	V
17668.500	52.0	-18.9	45.6	25.300	H
17827.500	52.0	-18.5	45.6	24.900	H
17965.500	52.0	-17.7	45.6	24.100	V

Ch9

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2485.600	57.1	-38.9	27.7	68.300	H
17925.000	52.9	-17.7	45.6	25.000	V
18000.000	52.6	-45.6	44.5	53.666	H
17709.000	52.2	-18.9	45.6	25.500	V
17998.500	52.0	-17.7	45.6	24.100	V
17553.000	52.0	-19.2	45.6	25.600	V

Test graphs as below:

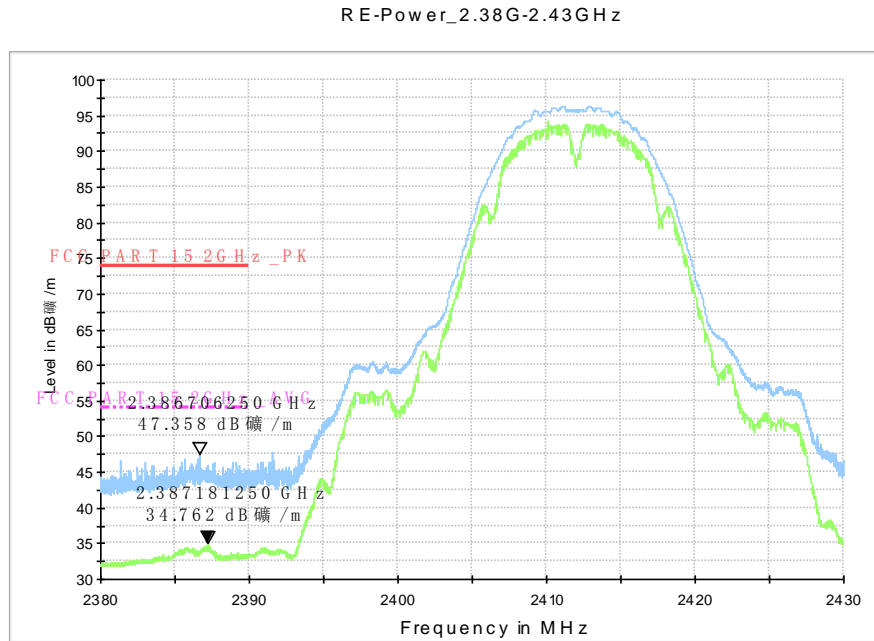


Fig.A.6.2.1 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz – 2.45GHz

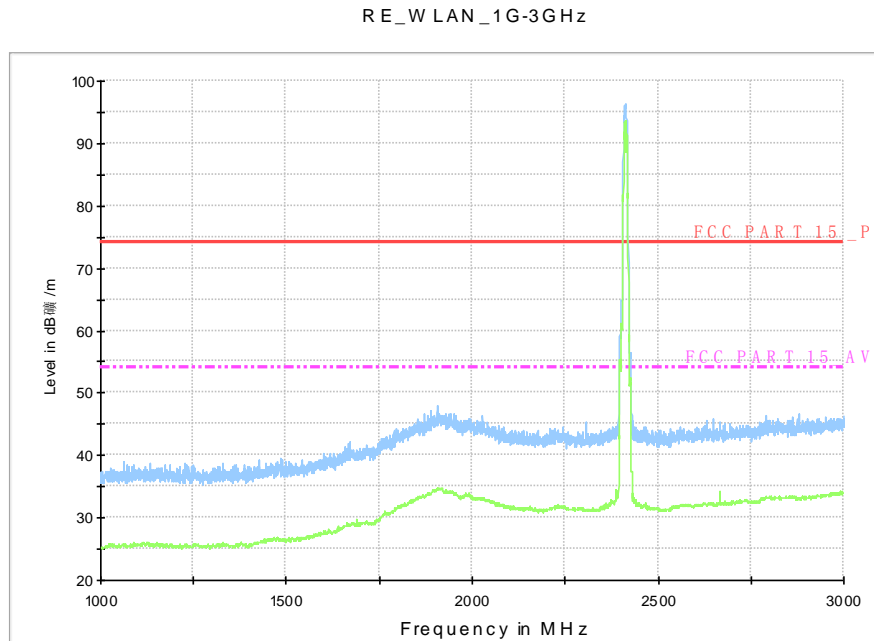


Fig.A.6.2.2 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-3 GHz)

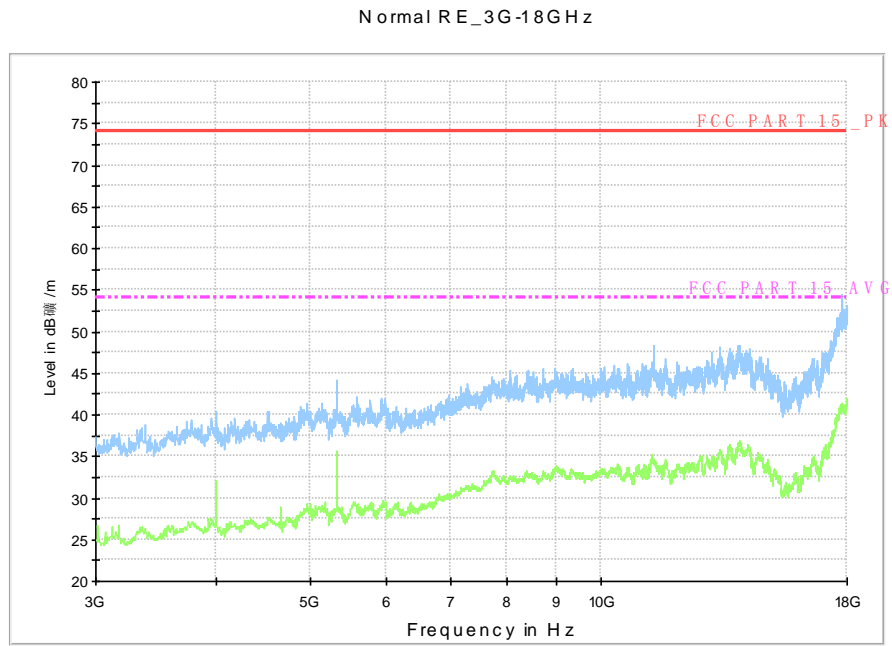


Fig.A.6.2.3 Radiated Spurious Emission (802.11b, Ch1, 3 GHz-18 GHz)

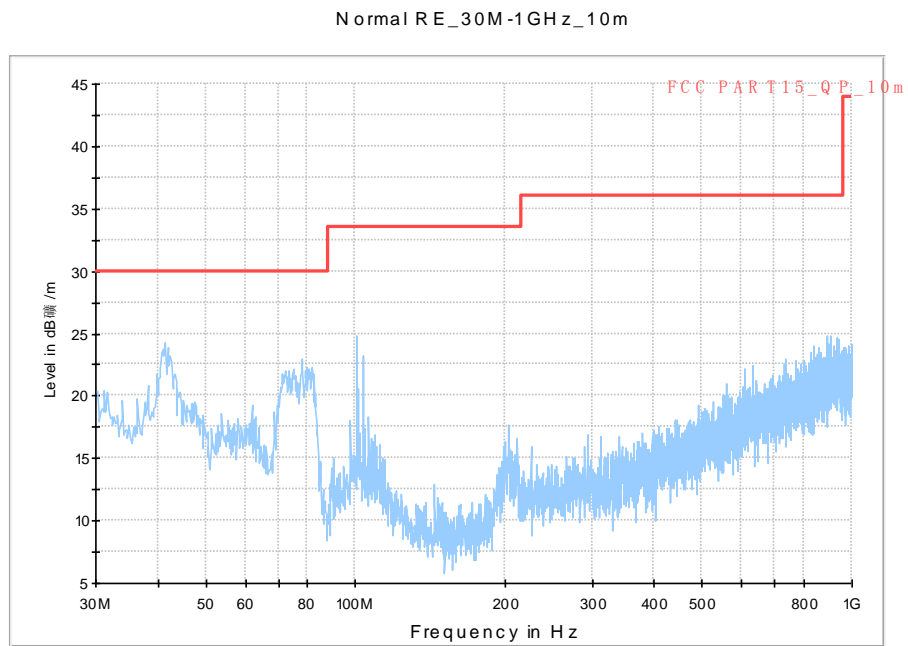


Fig.A.6.2.4 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

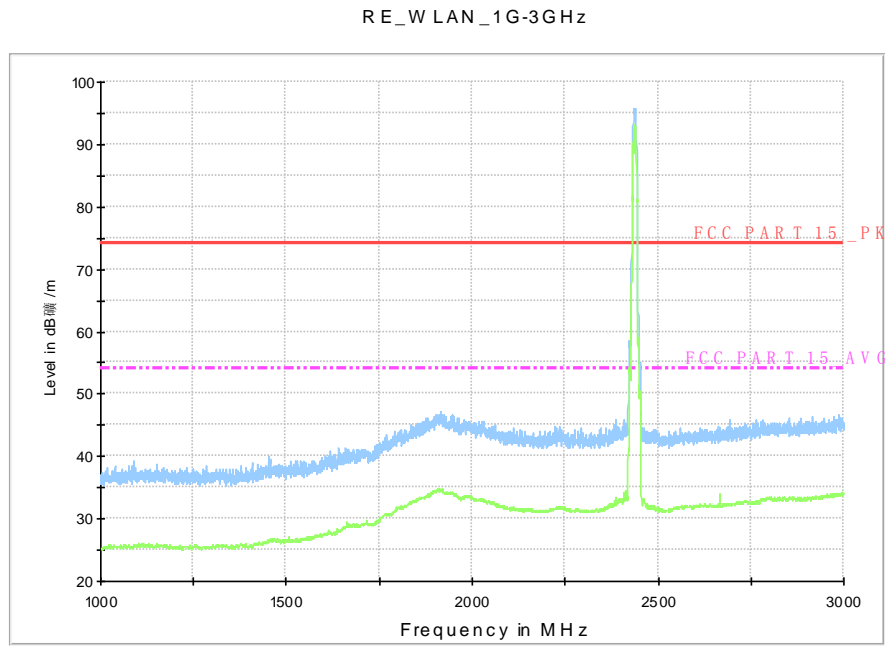


Fig.A.6.2.5 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-3 GHz)

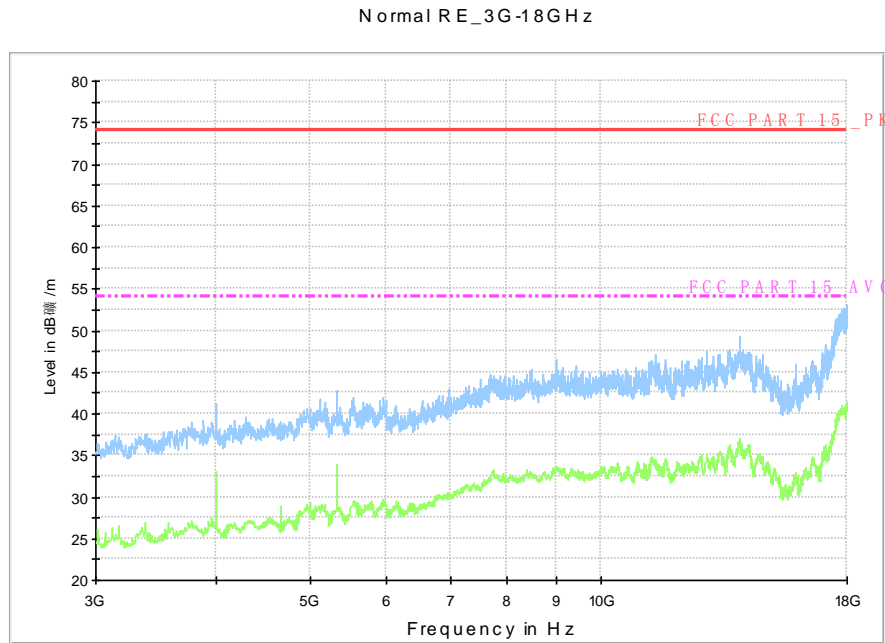


Fig.A.6.2.6 Radiated Spurious Emission (802.11b, Ch6, 3 GHz-18 GHz)

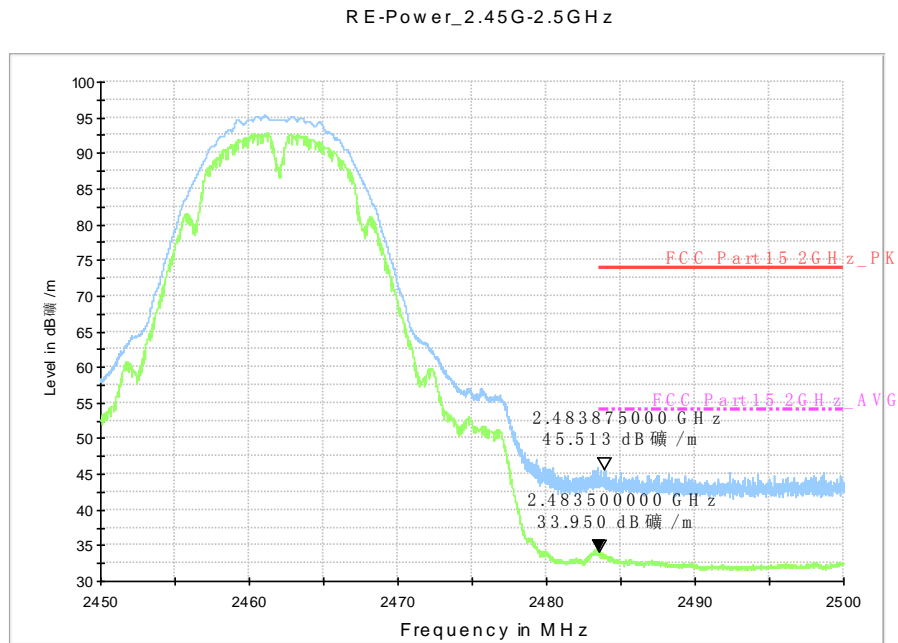


Fig.A.6.2.7 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

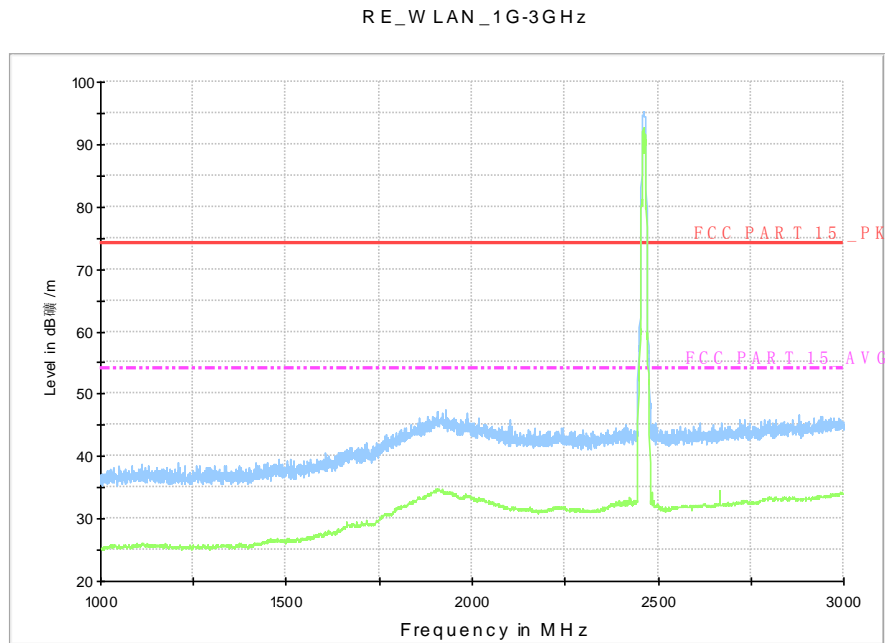


Fig.A.6.2.8 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-3 GHz)

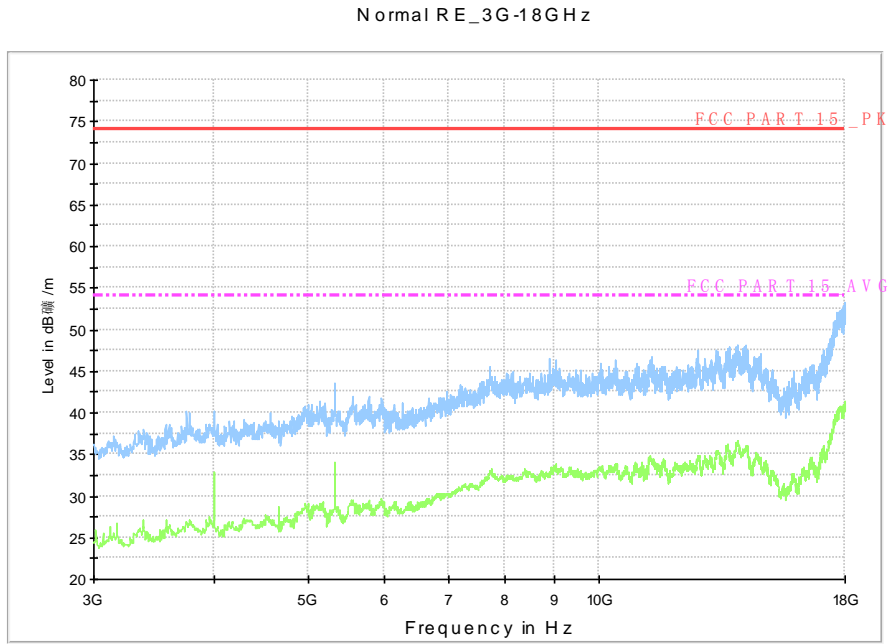


Fig.A.6.2.9 Radiated Spurious Emission (802.11b, Ch11, 3 GHz-18 GHz)

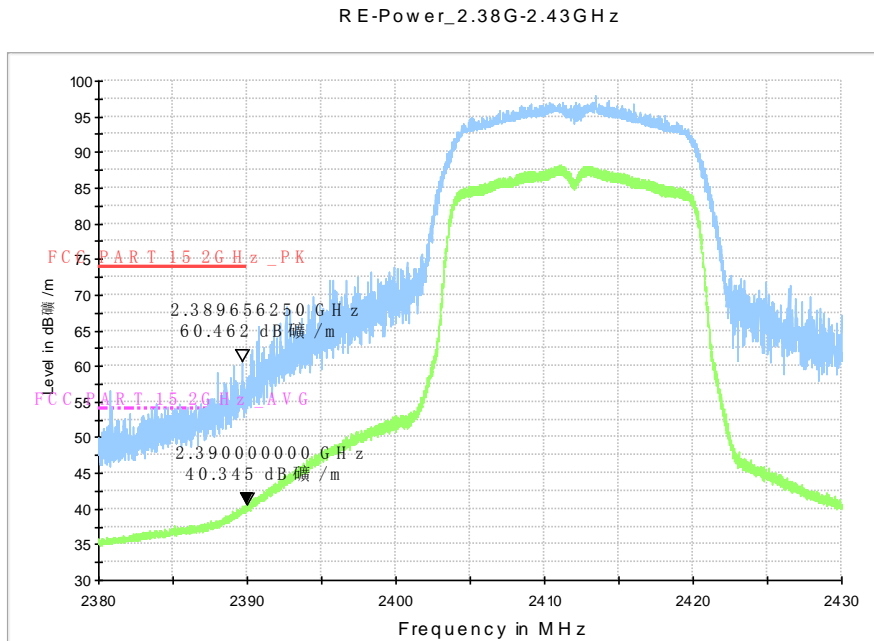


Fig.A.6.2.10 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

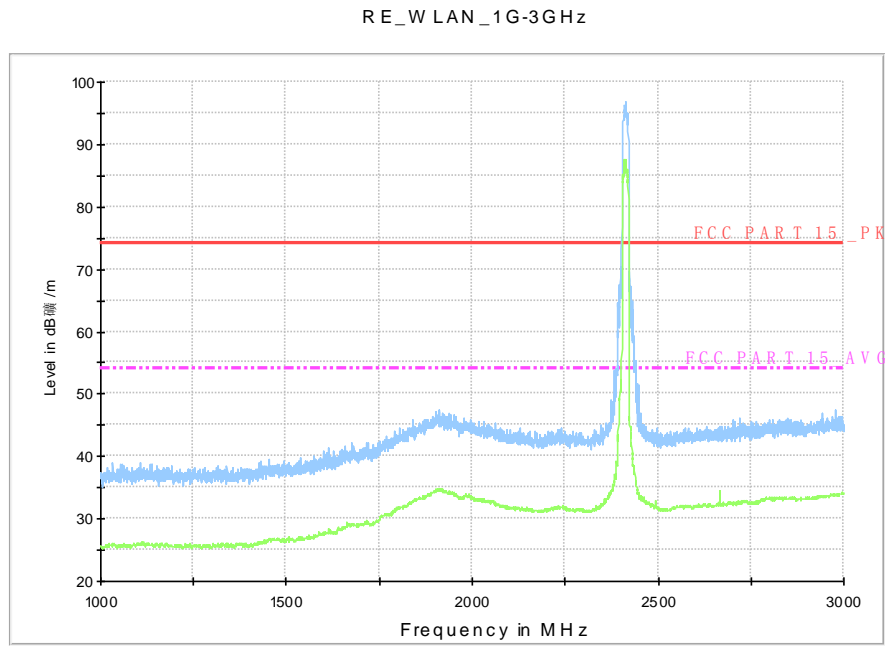


Fig.A.6.2.11 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-3 GHz)

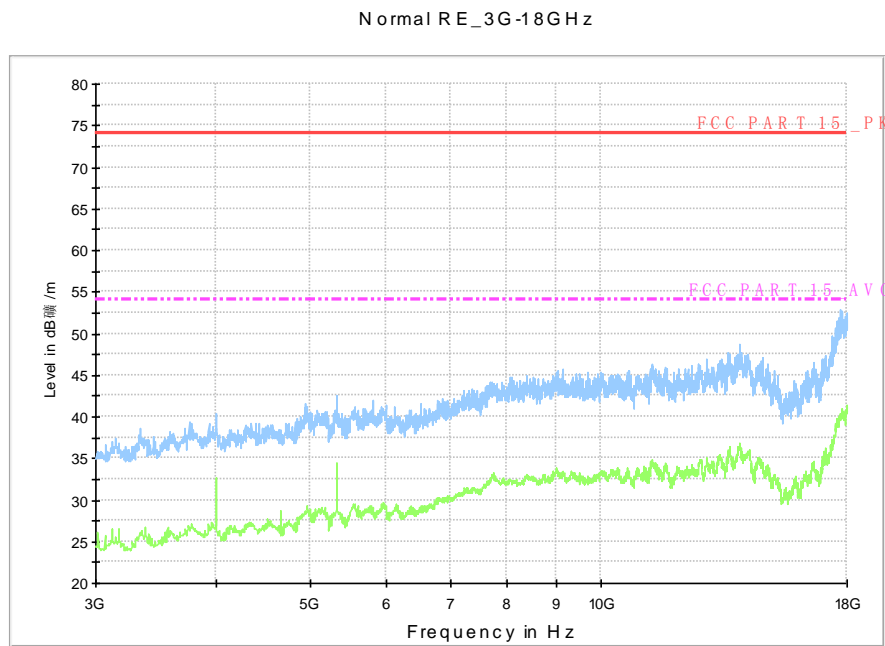


Fig.A.6.2.12 Radiated Spurious Emission (802.11g, Ch1, 3 GHz-18 GHz)

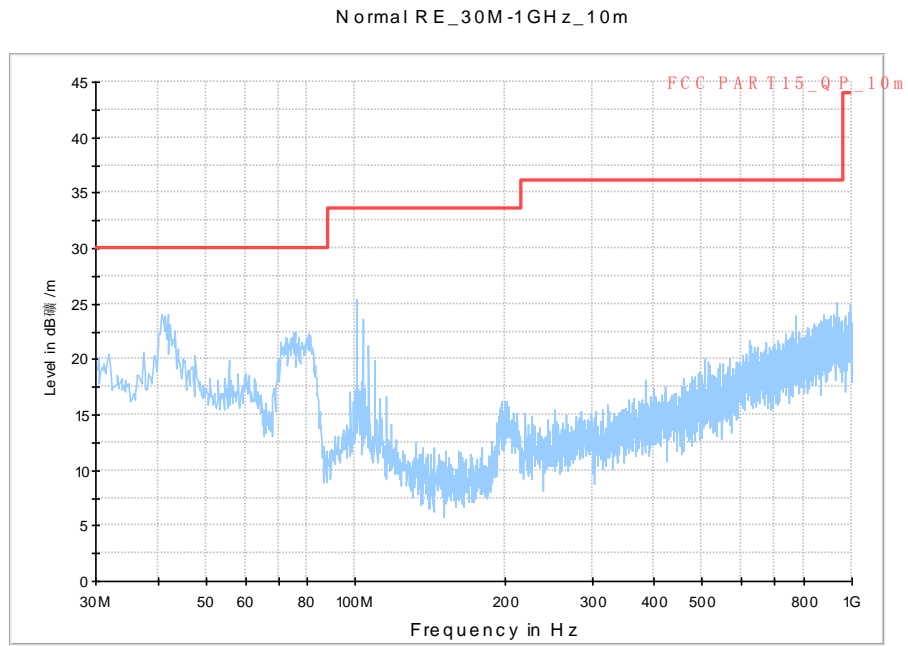


Fig.A.6.2.13 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

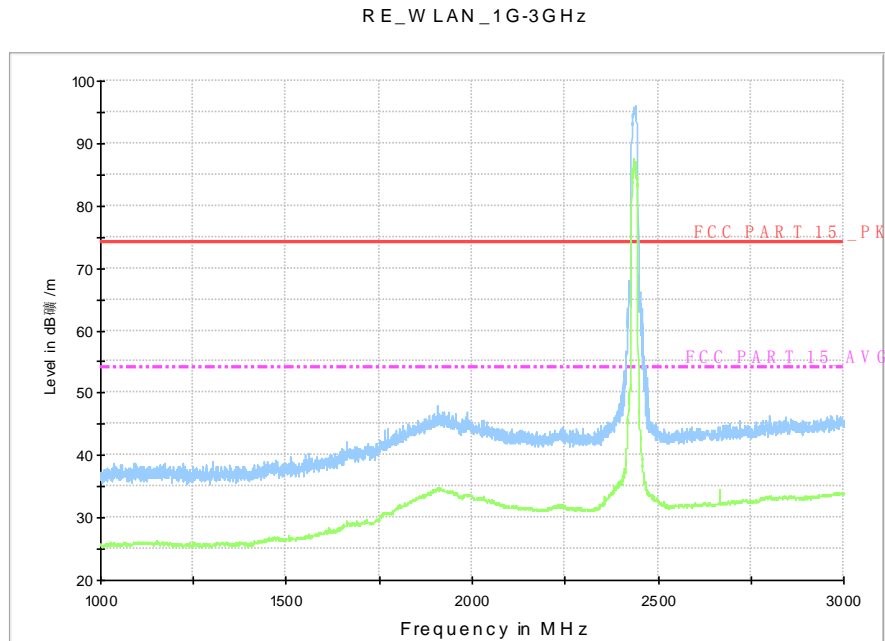


Fig.A.6.2.14 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-3 GHz)

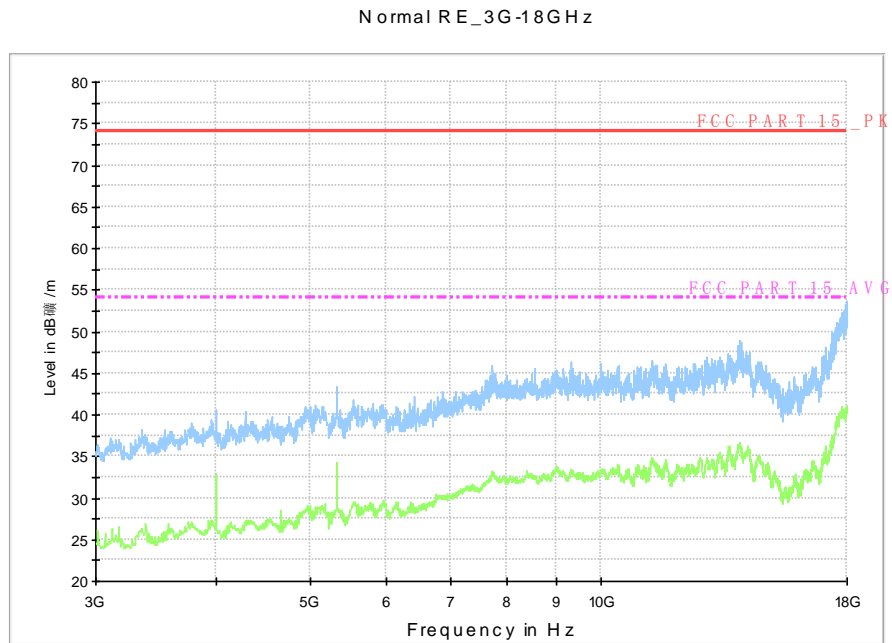


Fig.A.6.2.15 Radiated Spurious Emission (802.11g, Ch6, 3 GHz-18 GHz)

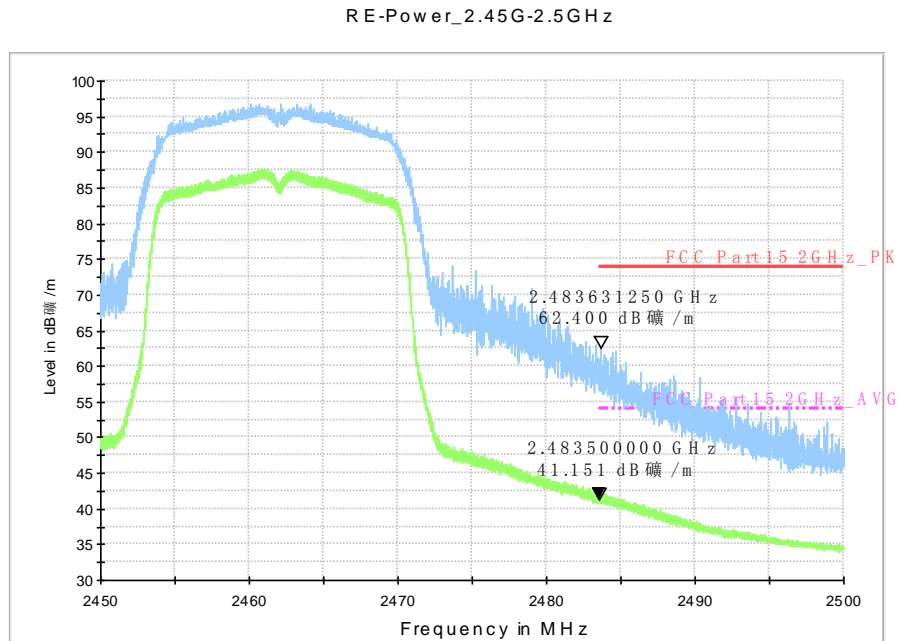


Fig.A.6.2.16 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

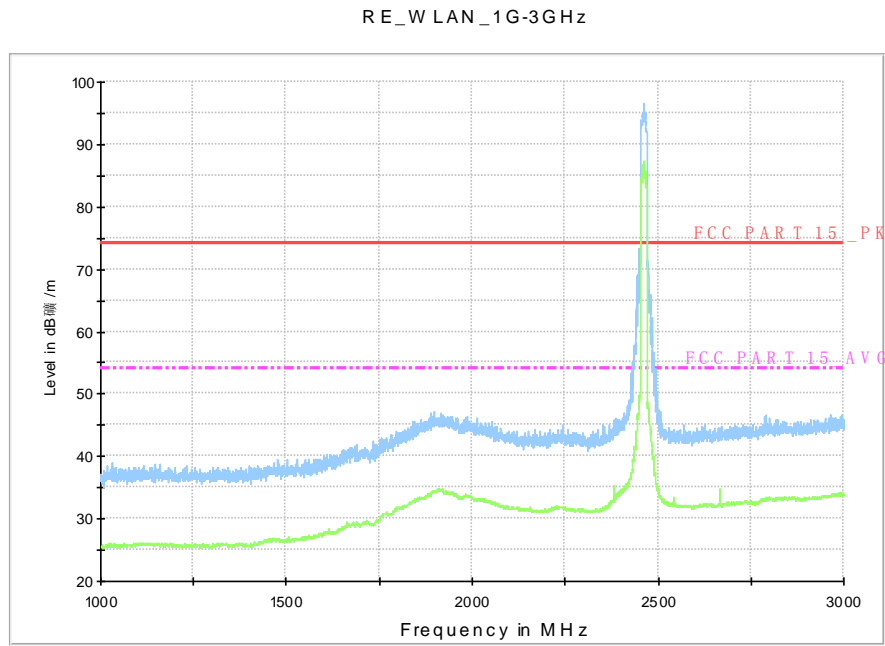


Fig.A.6.2.17 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-3 GHz)

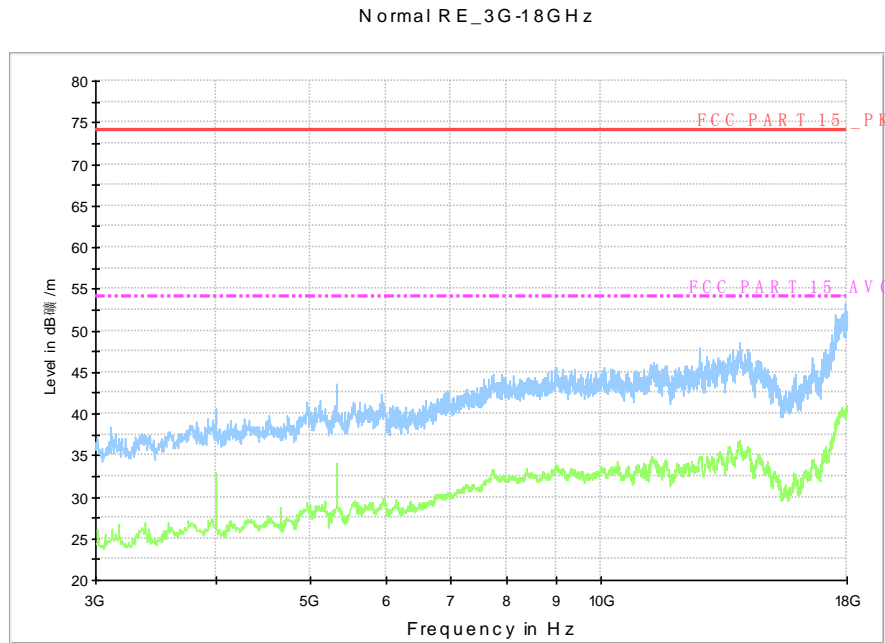


Fig.A.6.2.18 Radiated Spurious Emission (802.11g, Ch11, 3 GHz-18 GHz)

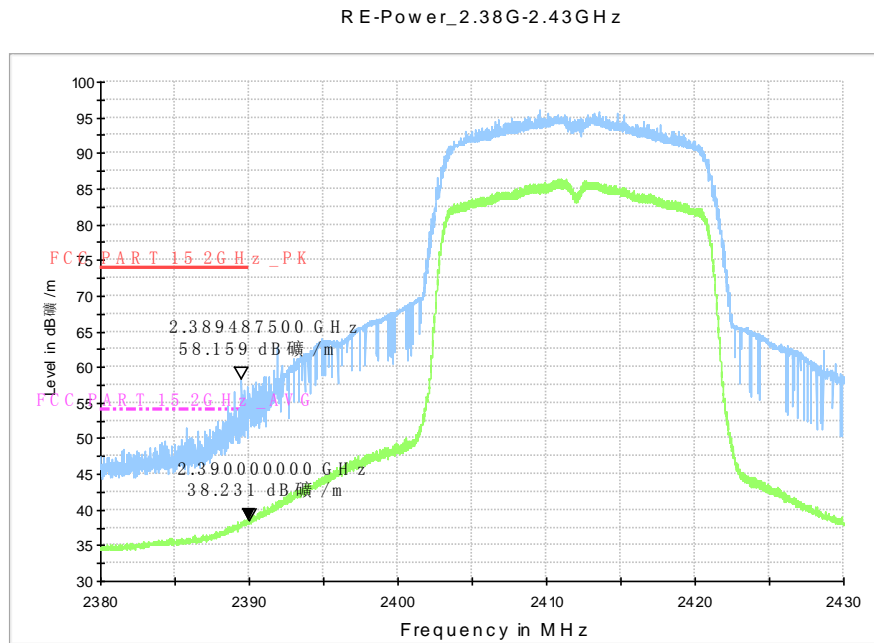


Fig.A.6.2.19 Radiated Spurious Emission (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

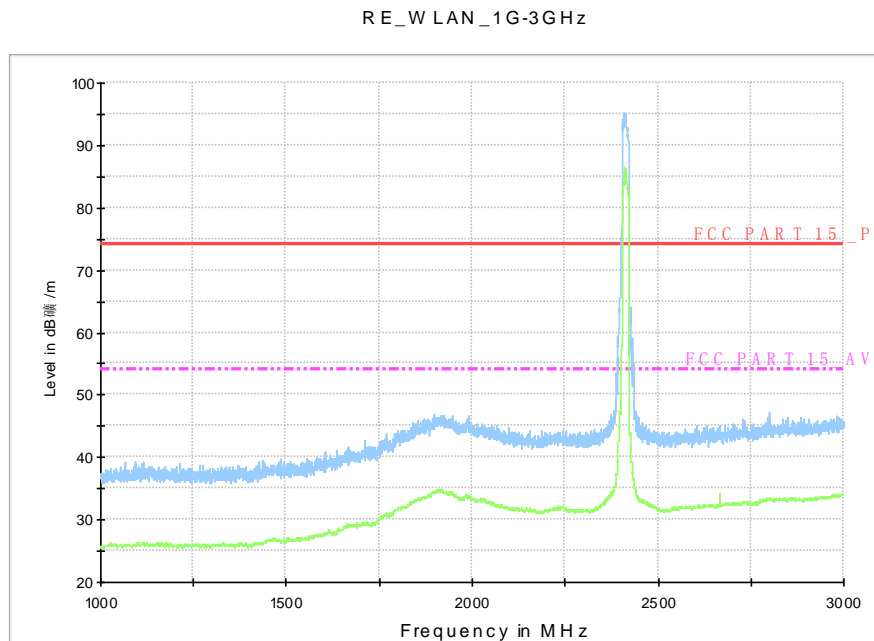


Fig.A.6.2.20 Radiated Spurious Emission (802.11n-HT20, Ch1, 1 GHz-3 GHz)

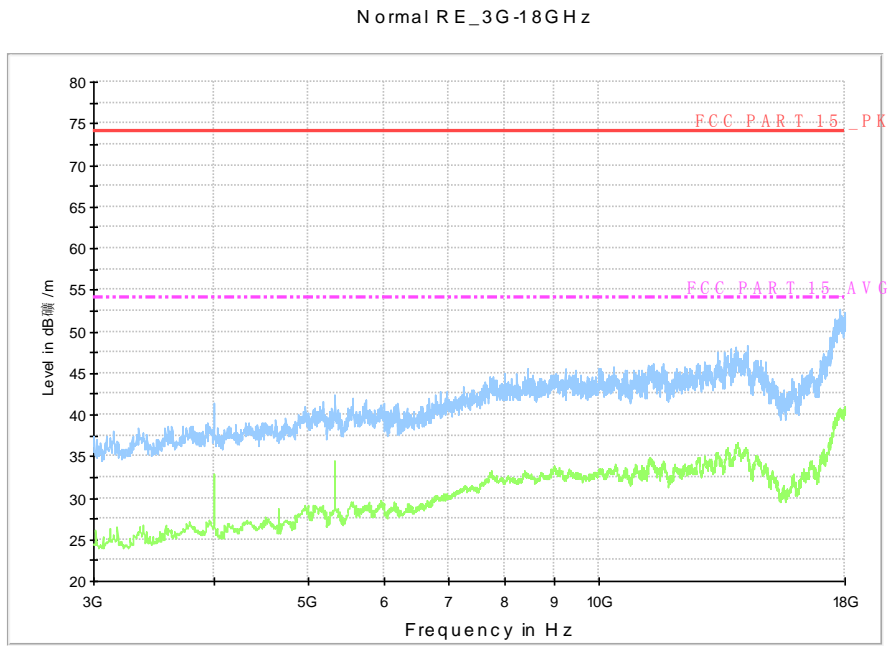


Fig.A.6.2.21 Radiated Spurious Emission (802.11n-HT20, Ch1, 3 GHz-18 GHz)

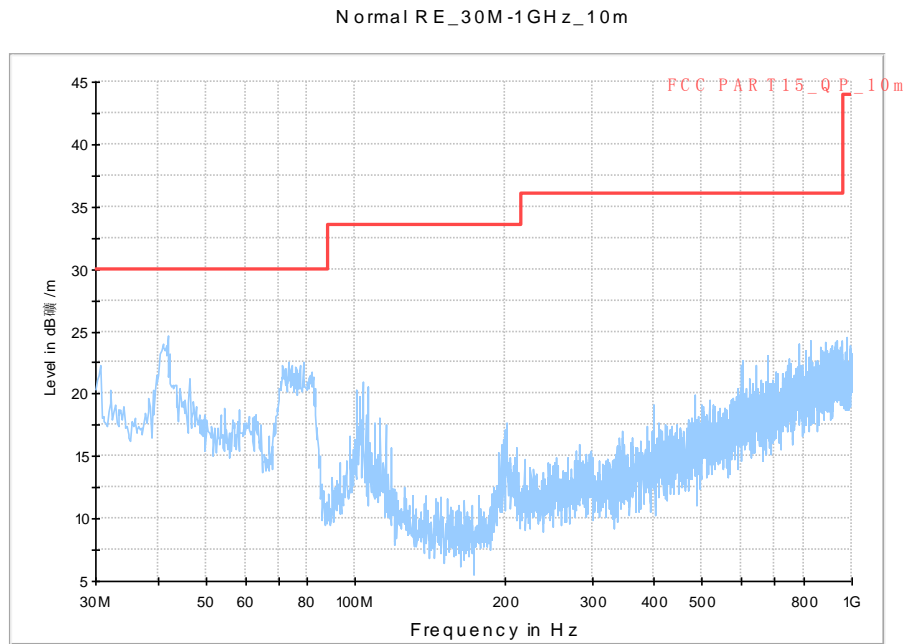


Fig.A.6.2.22 Radiated Spurious Emission (802.11n-HT20, Ch6, 30 MHz-1 GHz)

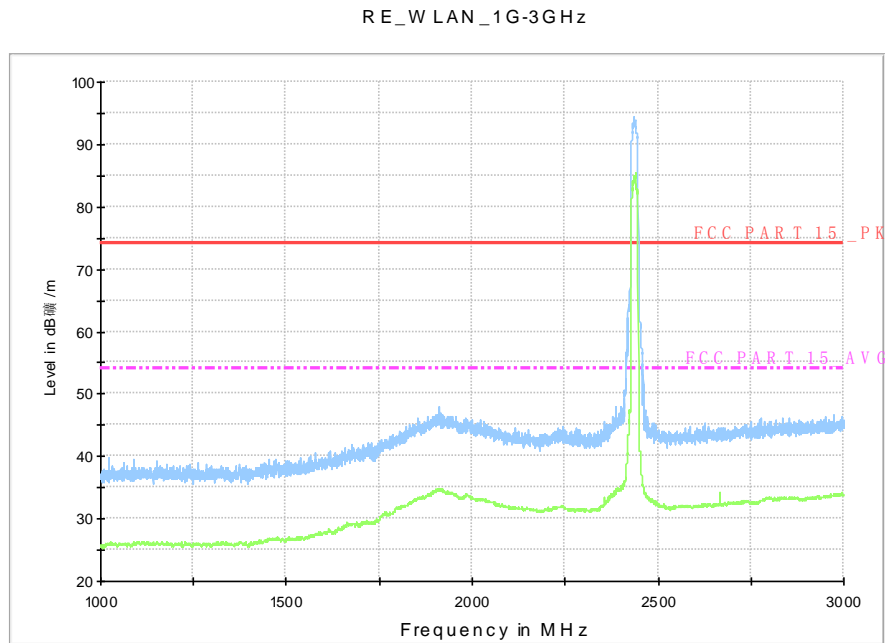


Fig.A.6.2.23 Radiated Spurious Emission (802.11n-HT20, Ch6, 1 GHz-3 GHz)

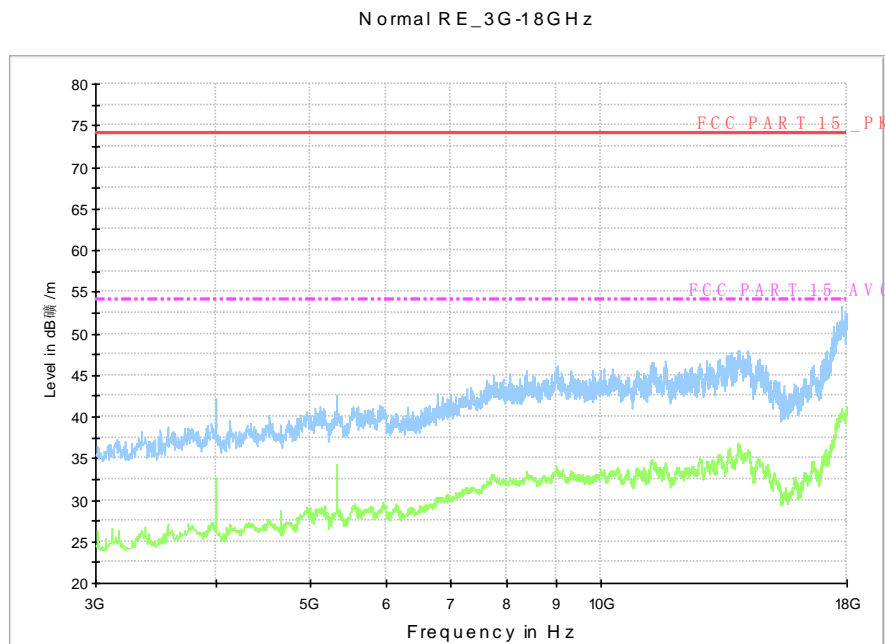


Fig.A.6.2.24 Radiated Spurious Emission (802.11n-HT20, Ch6, 3 GHz-18 GHz)

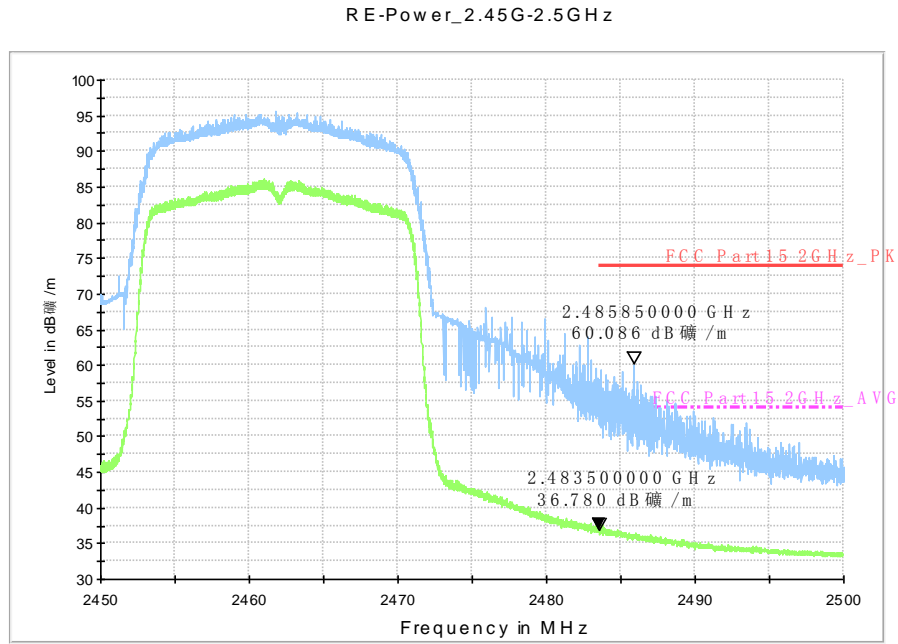


Fig.A.6.2.25 Radiated Spurious Emission (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

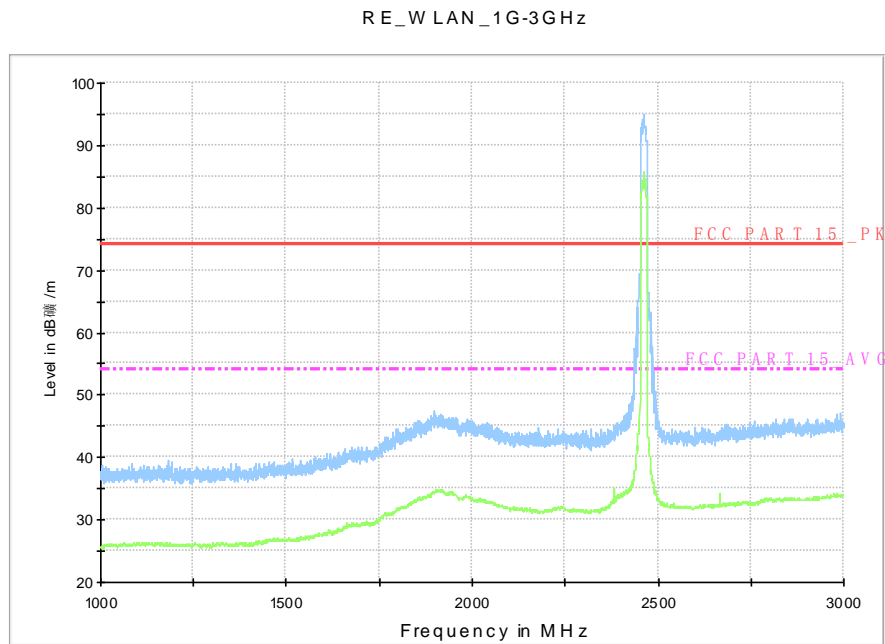


Fig.A.6.2.26 Radiated Spurious Emission (802.11n-HT20, Ch11, 1 GHz-3 GHz)

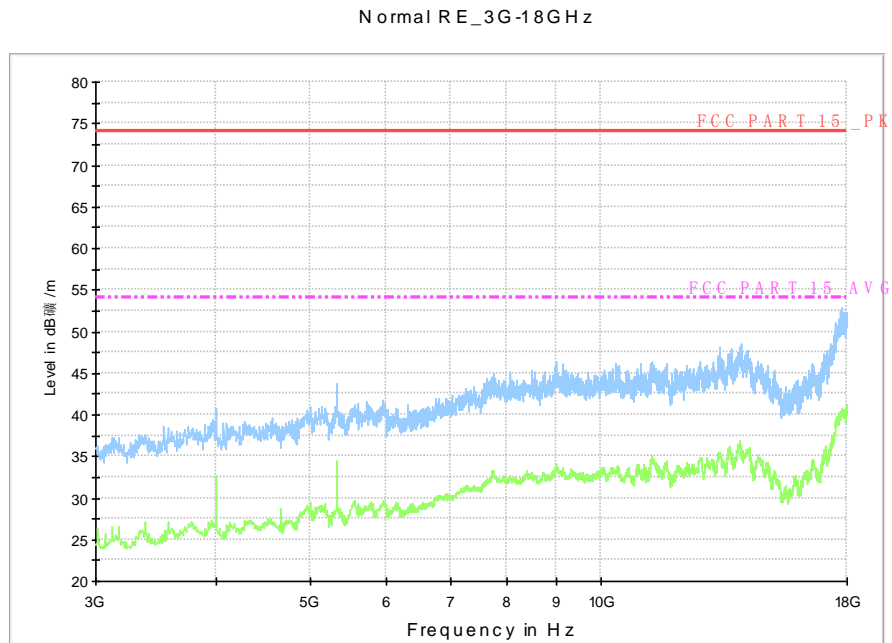


Fig.A.6.2.27 Radiated Spurious Emission (802.11n-HT20, Ch11, 3 GHz-18 GHz)

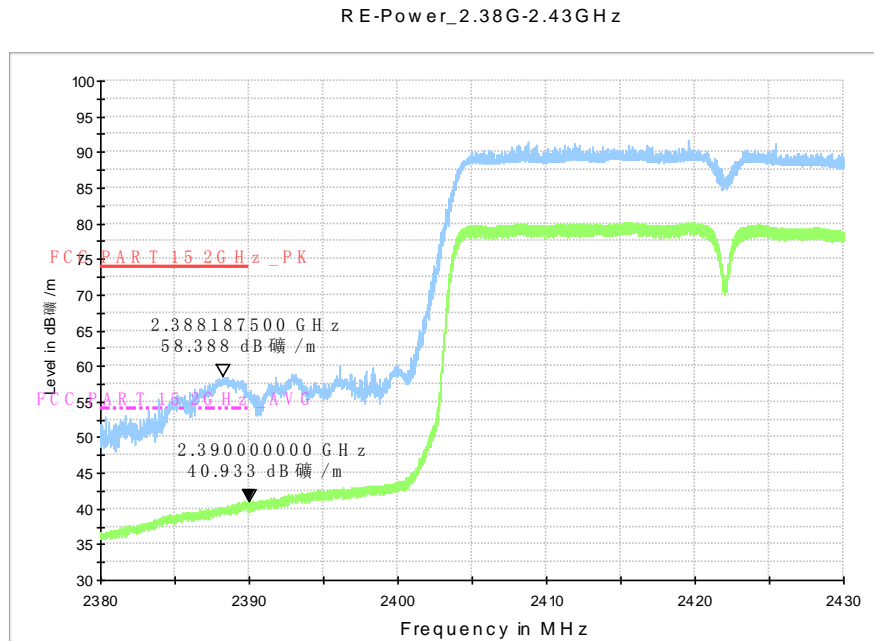


Fig.A.6.2.28 Radiated Spurious Emission (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.45GHz

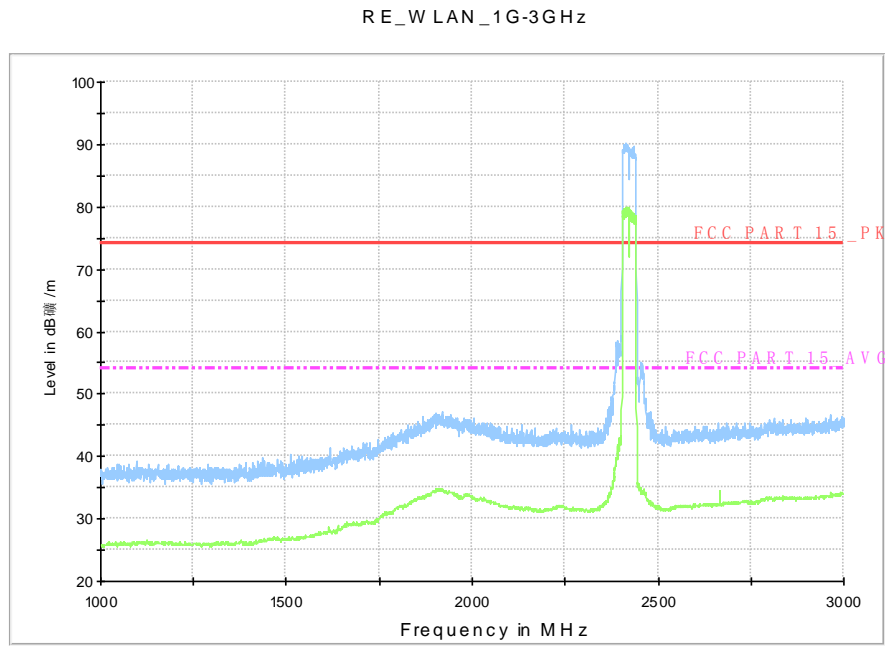


Fig.A.6.2.29 Radiated Spurious Emission (802.11n-HT40, ch3, 1 GHz-3 GHz)

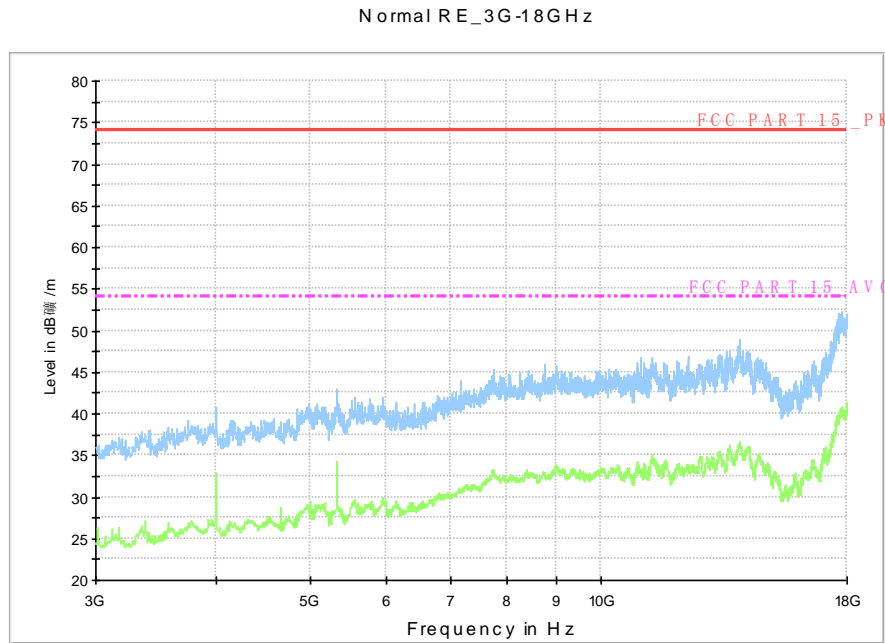


Fig.A.6.2.30 Radiated Spurious Emission (802.11n-HT40, ch3, 3 GHz-18 GHz)

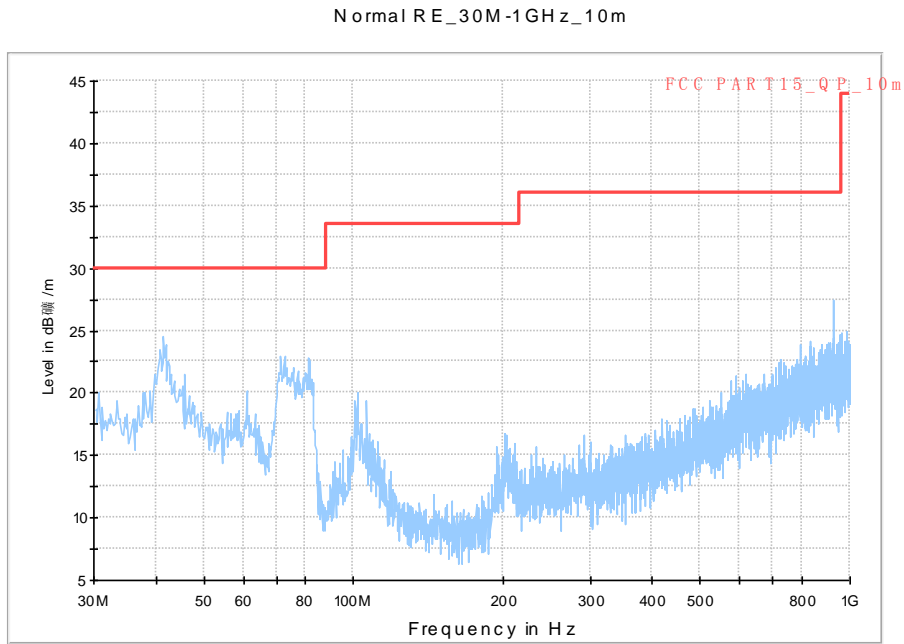


Fig.A.6.2.31 Radiated Spurious Emission (802.11n-HT40, Ch6, 30 MHz-1 GHz)

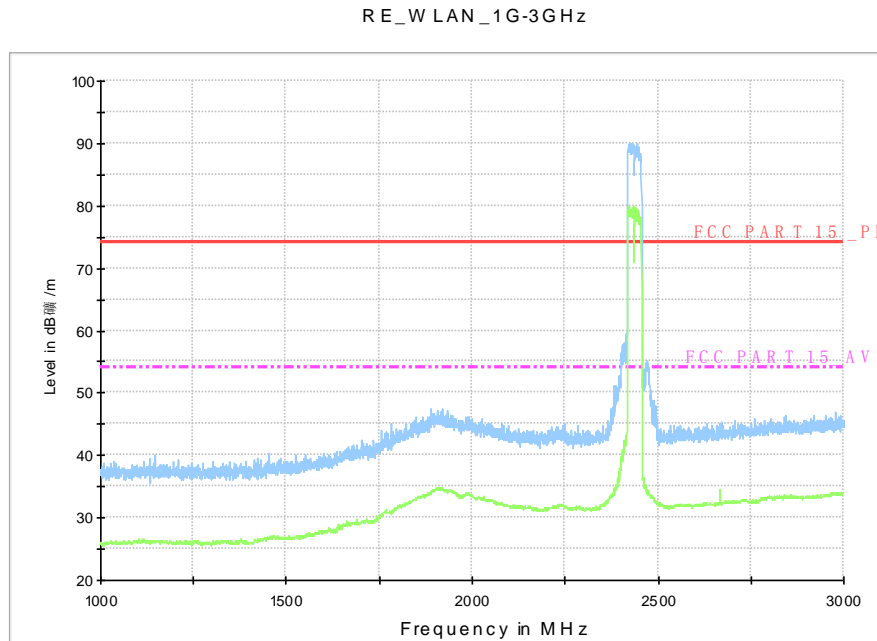


Fig.A.6.2.32 Radiated Spurious Emission (802.11n-HT40, Ch6, 1 GHz-3 GHz)

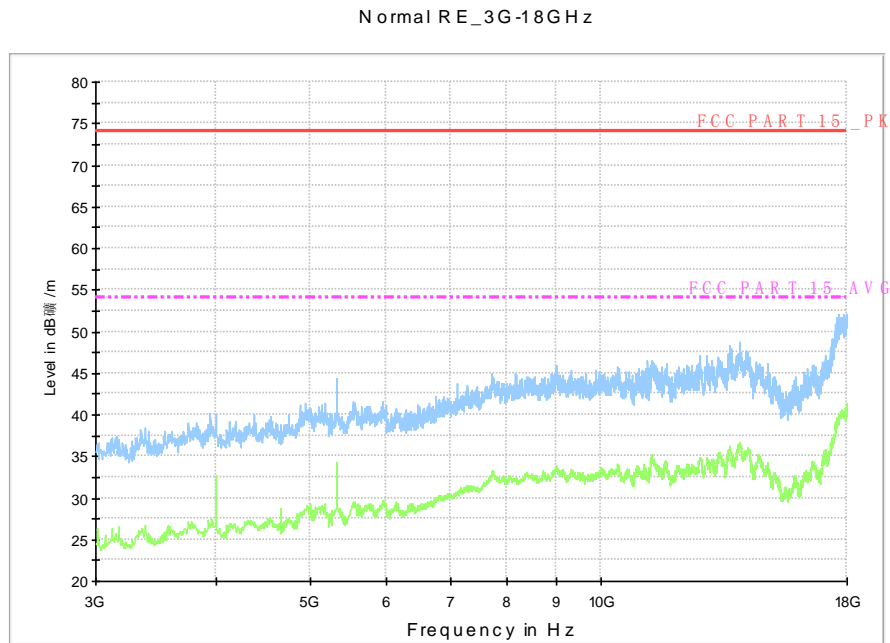


Fig.A.6.2.33 Radiated Spurious Emission (802.11n-HT40, Ch6, 3 GHz-18 GHz)

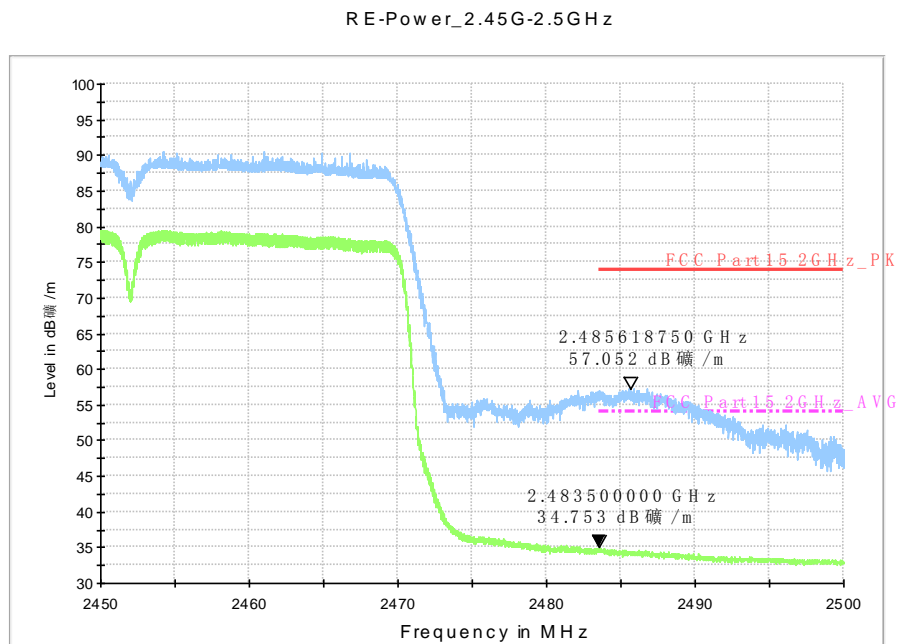


Fig.A.6.2.34 Radiated Spurious Emission (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

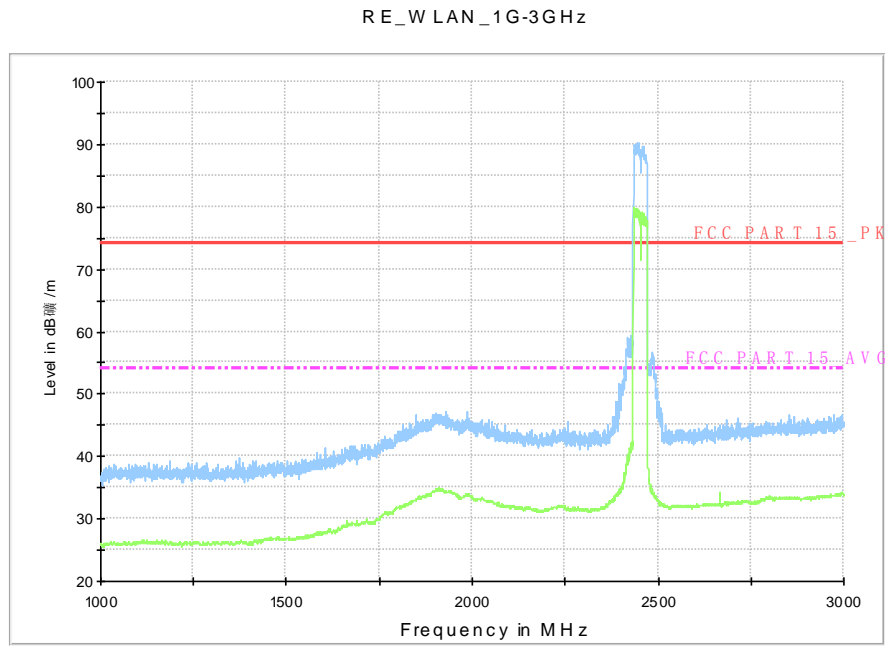


Fig.A.6.2.35 Radiated Spurious Emission (802.11n-HT40, ch9, 1 GHz-3 GHz)

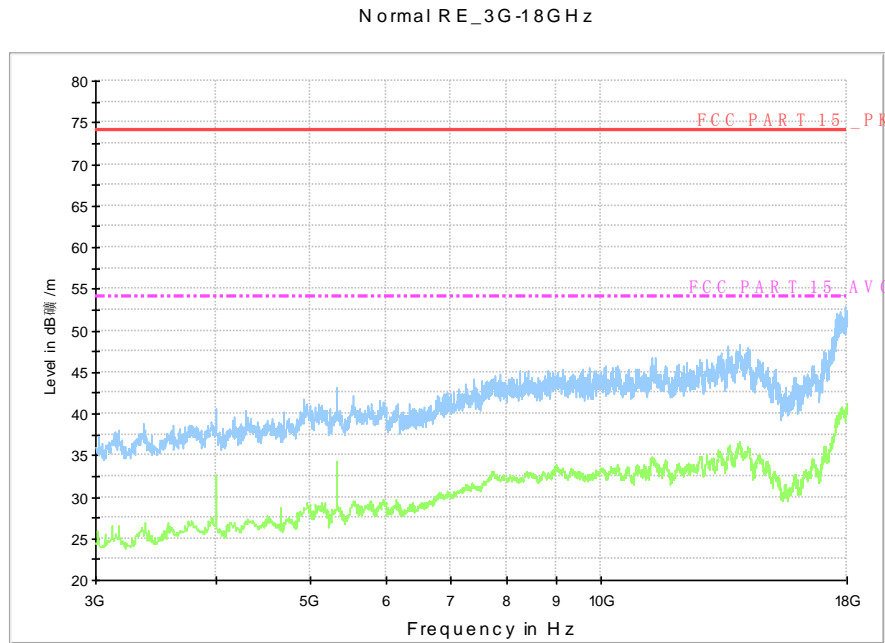


Fig.A.6.2.36 Radiated Spurious Emission (802.11n-HT40, ch9, 3 GHz-18 GHz)

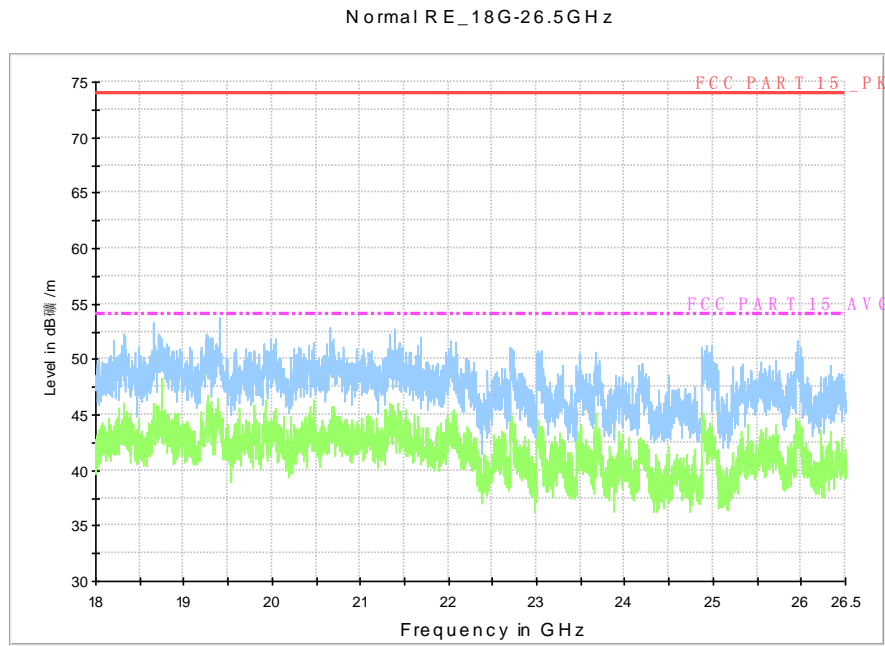


Fig.A.6.2.37 Radiated Spurious Emission (All channels): 18GHz – 26.5GHz

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.2dB, k=2.

Test graphs as below:

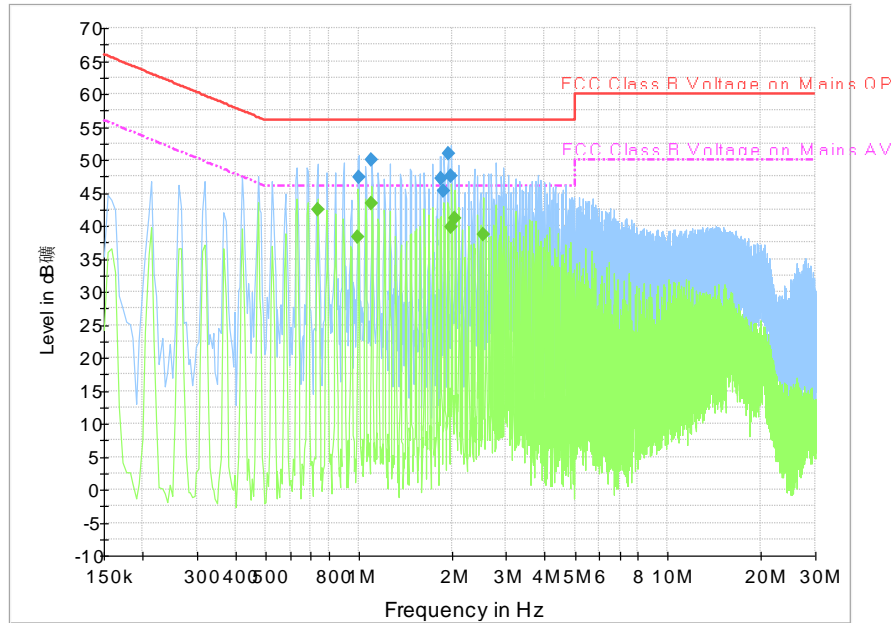


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.000500	47.4	GND	N	9.7	8.6	56.0
1.104000	50.0	GND	L1	9.7	6.0	56.0
1.842000	47.3	GND	N	9.7	8.7	56.0
1.887000	45.4	GND	L1	9.7	10.6	56.0
1.945500	50.9	GND	L1	9.7	5.1	56.0
1.995000	47.6	GND	L1	9.7	8.4	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.735000	42.4	GND	L1	9.8	3.6	46.0
0.996000	38.3	GND	L1	9.7	7.7	46.0
1.104000	43.5	GND	L1	9.7	2.5	46.0
1.995000	39.8	GND	L1	9.7	6.2	46.0
2.049000	41.2	GND	L1	9.7	4.8	46.0
2.521500	38.7	GND	L1	9.7	7.3	46.0

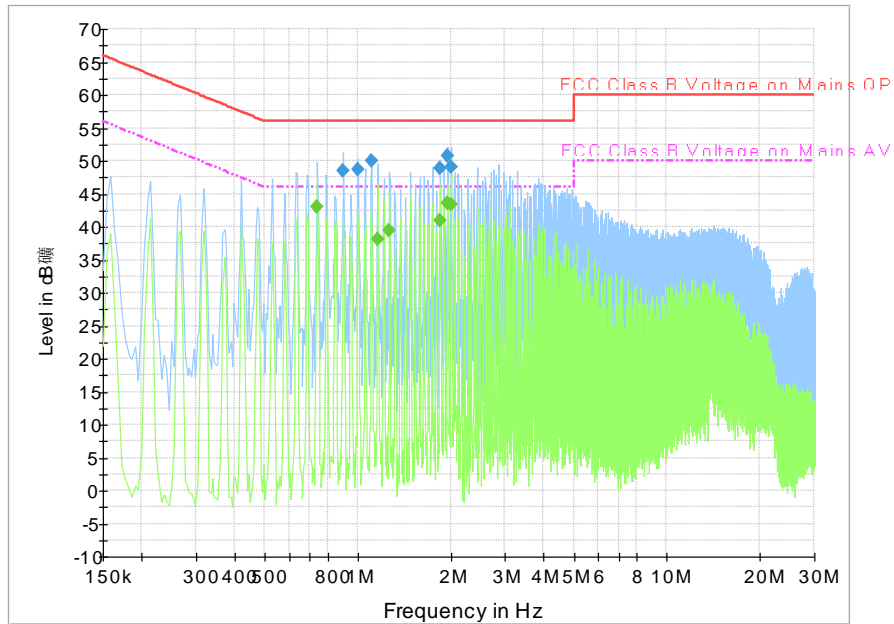


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.897000	48.5	GND	L1	9.7	7.5	56.0
1.005000	48.7	GND	L1	9.7	7.3	56.0
1.108500	49.9	GND	L1	9.7	6.1	56.0
1.846500	48.9	GND	L1	9.7	7.1	56.0
1.954500	50.8	GND	L1	9.7	5.2	56.0
2.004000	49.0	GND	L1	9.7	7.0	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.739500	43.0	GND	L1	9.8	3.0	46.0
1.158000	38.1	GND	L1	9.7	7.9	46.0
1.266000	39.5	GND	L1	9.7	6.5	46.0
1.846500	40.9	GND	L1	9.7	5.1	46.0
1.954500	43.7	GND	L1	9.7	2.3	46.0
2.004000	43.3	GND	L1	9.7	2.7	46.0