



Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2488.100	44.8	-38.9	27.7	56.000	H
17989.500	54.9	-17.7	45.6	27.000	V
17848.500	54.7	-18.5	45.6	27.600	V
17773.500	54.5	-18.5	45.6	27.400	V
17929.500	54.3	-17.7	45.6	26.400	H
17979.000	54.3	-17.7	45.6	26.400	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2390.000	47.1	-38.8	27.7	58.200	H
17668.500	53.3	-18.9	45.6	26.600	V
17929.500	53.0	-17.7	45.6	25.100	V
17722.500	52.2	-18.9	45.6	25.500	H
17799.000	52.2	-18.5	45.6	25.100	H
17847.000	52.2	-18.5	45.6	25.100	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17751.000	52.7	-18.5	45.6	25.600	V
17776.500	52.5	-18.5	45.6	25.400	H
17940.000	52.3	-17.7	45.6	24.400	V
17823.000	52.2	-18.5	45.6	25.100	H
17785.500	52.1	-18.5	45.6	25.000	V
17821.500	51.7	-18.5	45.6	24.600	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.680	53.9	-38.9	27.7	65.100	V
17916.000	54.8	-17.7	45.6	26.900	V
17974.500	54.5	-17.7	45.6	26.600	H
17949.000	54.3	-17.7	45.6	26.400	H
17995.500	54.1	-17.7	45.6	26.200	H
17904.000	54.0	-18.5	45.6	26.900	V

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2389.600	44.8	-38.8	27.7	55.900	V
17965.500	55.3	-17.7	45.6	27.400	V
17979.000	54.9	-17.7	45.6	27.000	H
17958.000	54.5	-17.7	45.6	26.600	H
17980.500	54.5	-17.7	45.6	26.600	H
17788.500	54.2	-18.5	45.6	27.100	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
18000.000	55.0	-45.6	44.5	56.066	V
17992.500	54.8	-17.7	45.6	26.900	H
17961.000	54.5	-17.7	45.6	26.600	H
17977.500	54.4	-17.7	45.6	26.500	H
17998.500	54.3	-17.7	45.6	26.400	V
17953.500	54.3	-17.7	45.6	26.400	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.500	63.9	-38.9	27.7	75.100	V
17934.000	56.2	-17.7	45.6	28.300	H
17977.500	55.3	-17.7	45.6	27.400	H
17998.500	55.2	-17.7	45.6	27.300	V
17994.000	55.1	-17.7	45.6	27.200	H
17997.000	54.7	-17.7	45.6	26.800	H



802.11n-HT40

Ch3

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2386.800	50.6	-38.8	27.7	61.700	V
17922.000	55.0	-17.7	45.6	27.100	H
17998.500	54.5	-17.7	45.6	26.600	V
17946.000	54.4	-17.7	45.6	26.500	H
17959.500	54.3	-17.7	45.6	26.400	H
17992.500	54.2	-17.7	45.6	26.300	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17991.000	54.9	-17.7	45.6	27.000	V
17995.500	54.8	-17.7	45.6	26.900	H
17998.500	54.7	-17.7	45.6	26.800	V
17973.000	54.6	-17.7	45.6	26.700	H
17979.000	54.5	-17.7	45.6	26.600	V
17947.500	54.5	-17.7	45.6	26.600	V

Ch9

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2484.300	52.3	-38.9	27.7	63.500	V
17952.000	55.1	-17.7	45.6	27.200	H
17950.500	55.0	-17.7	45.6	27.100	V
17965.500	54.8	-17.7	45.6	26.900	H
17995.500	54.6	-17.7	45.6	26.700	H
17932.500	54.5	-17.7	45.6	26.600	V

Test graphs as below:

RE-Power_2.38G-2.43GHz

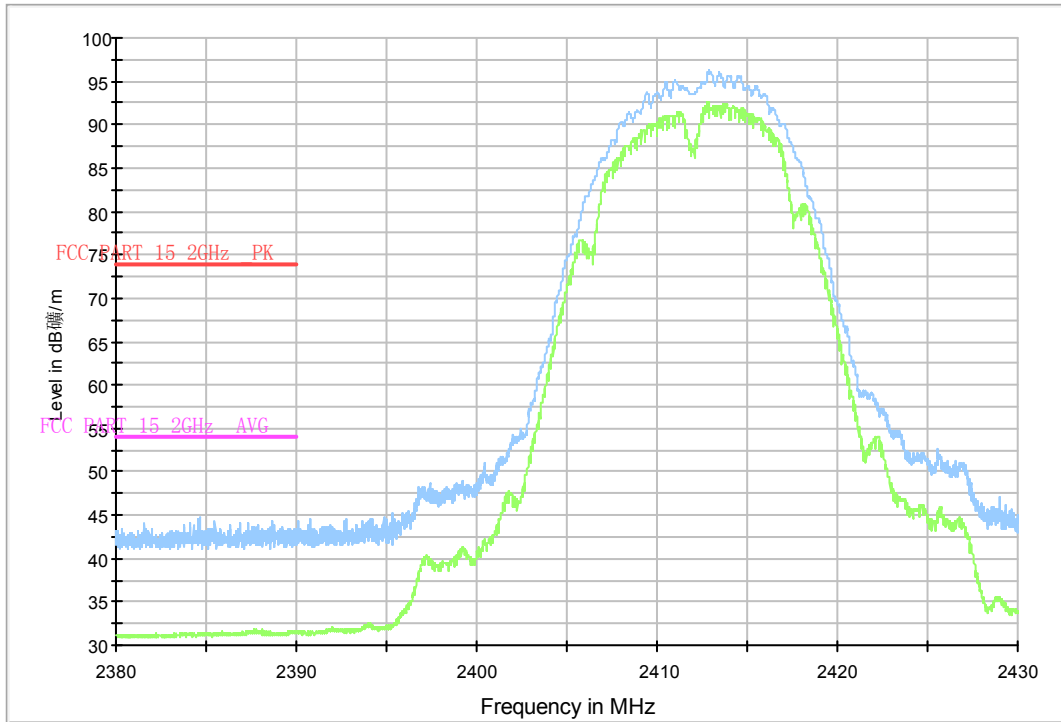


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz - 2.45GHz

RE_WLAN_1G-3GHz

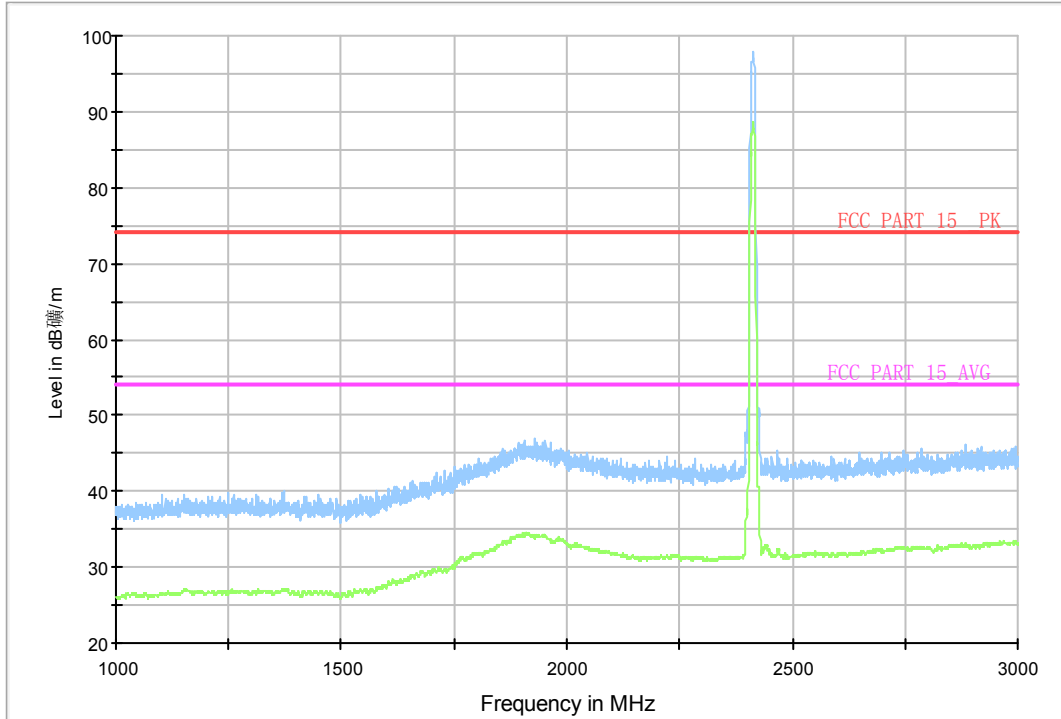


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 1 GHz-3 GHz)

Normal RE_3G-18GHz

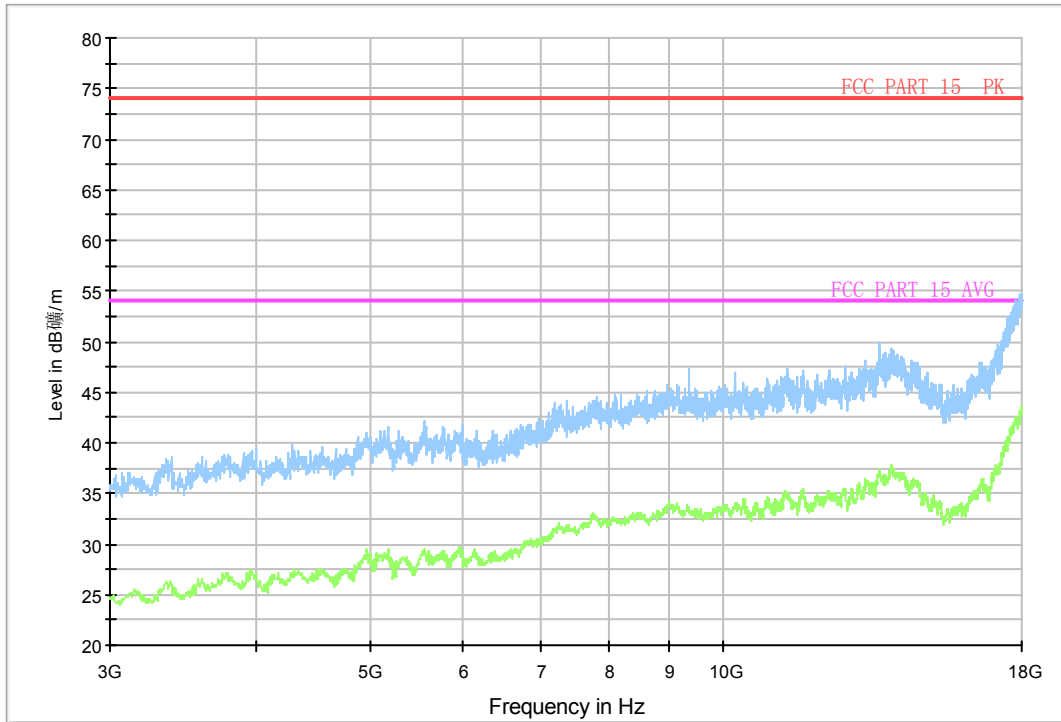


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 3 GHz-18 GHz)

RE_9kHz-30MHz

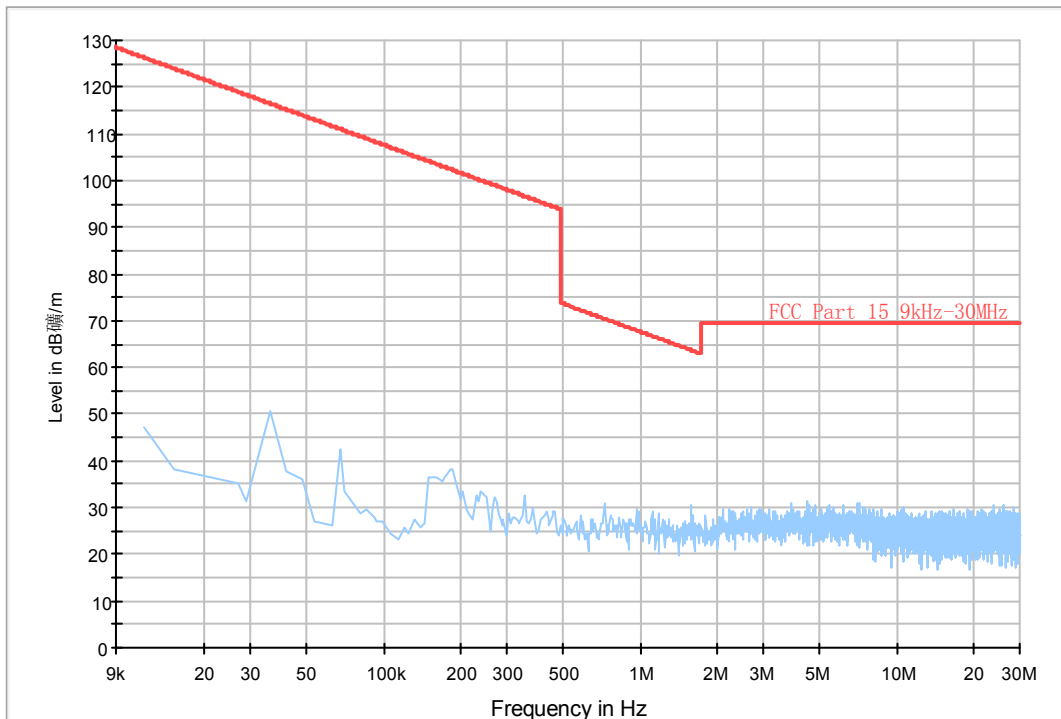


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 9kHz-30 MHz)

Normal RE_30M-1GHz_10m

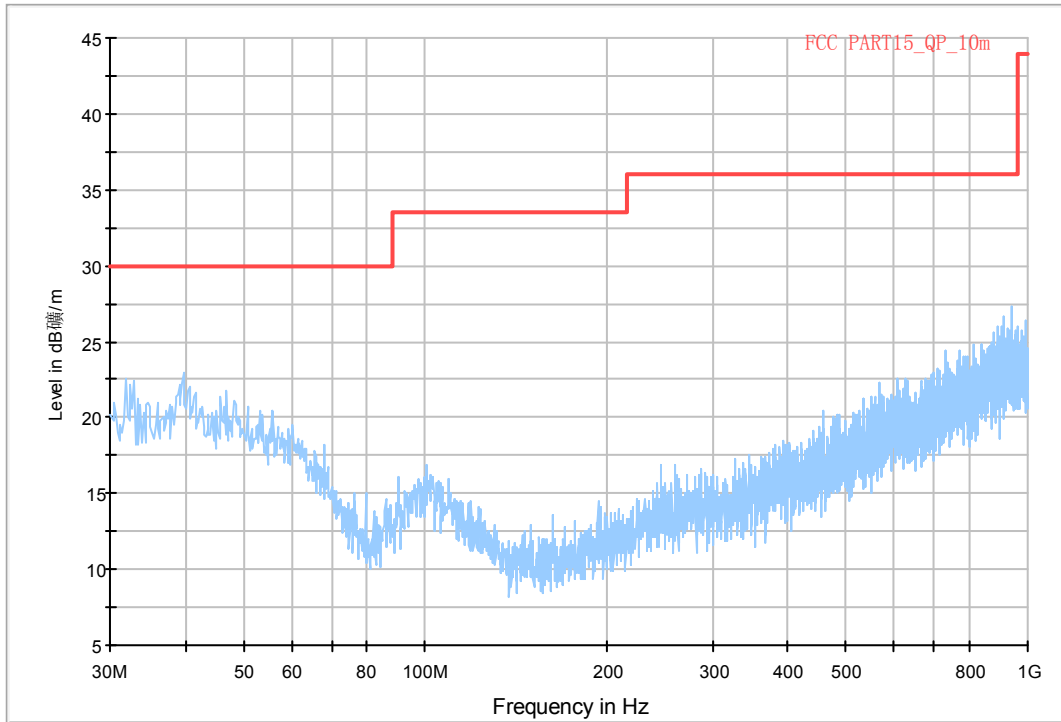


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 30 MHz-1 GHz)

RE_WLAN_1G-3GHz

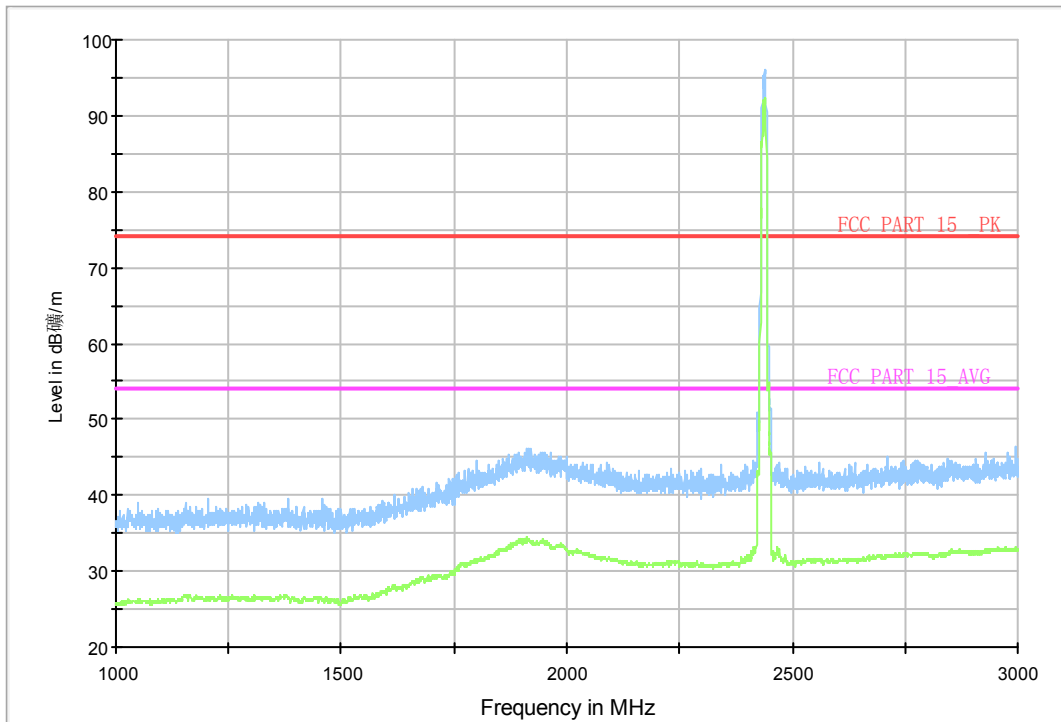


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 1 GHz-3 GHz)

Normal RE_3G-18GHz

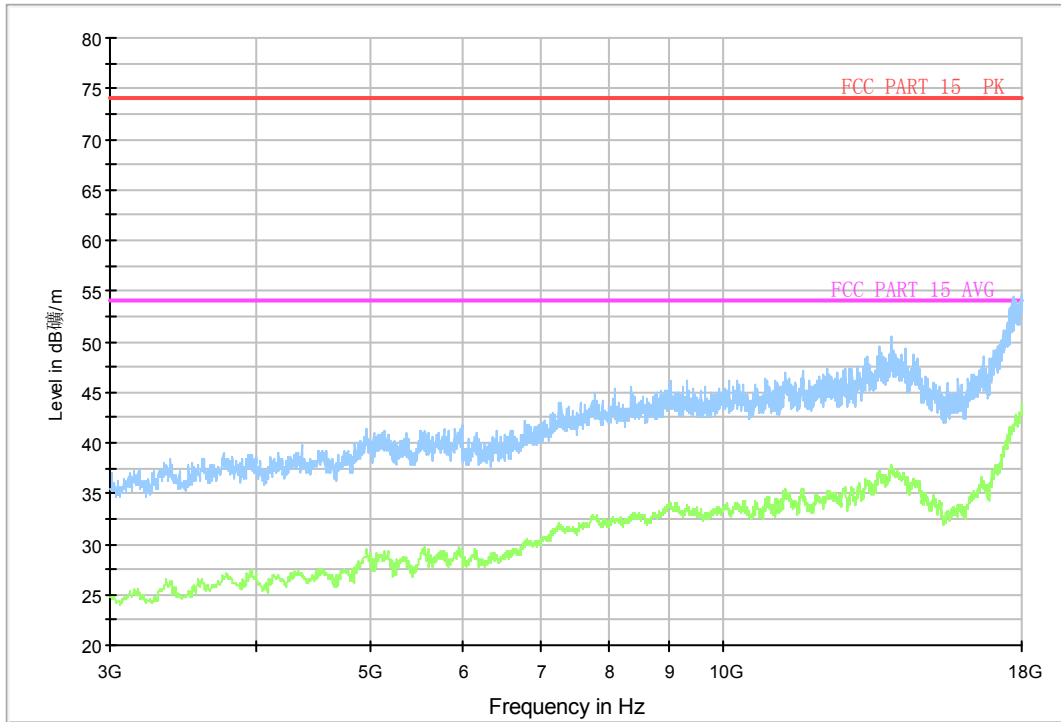


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 3 GHz-18 GHz)

Normal RE_18G-26.5GHz

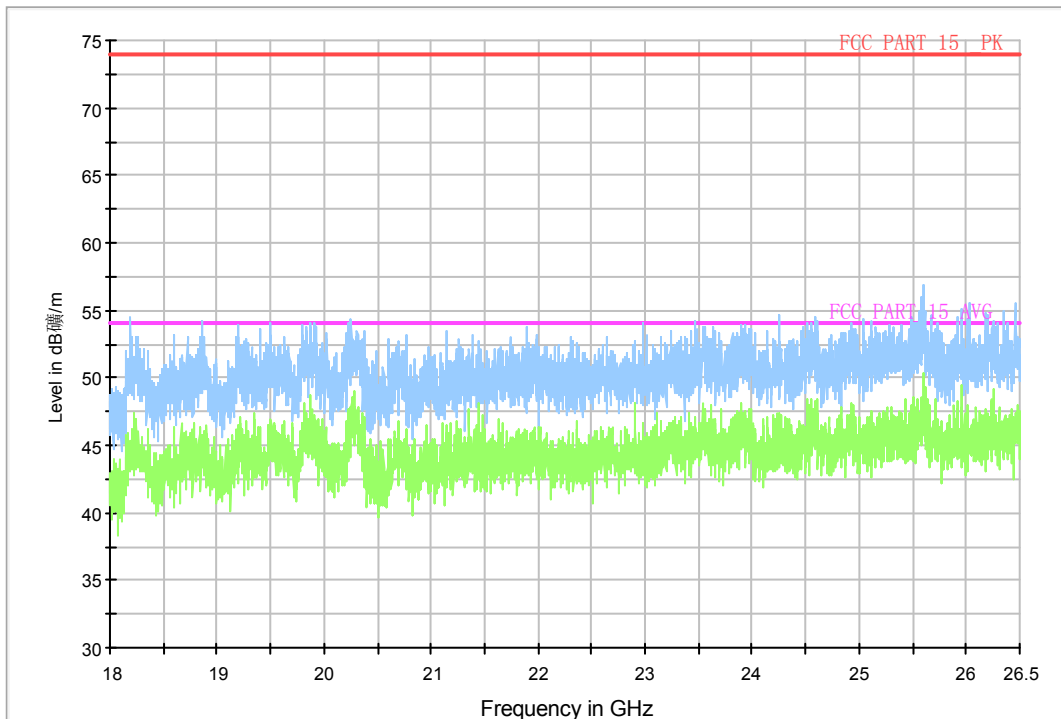


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 18GHz - 26.5GHz)

RE-Power_2.45G-2.5GHz

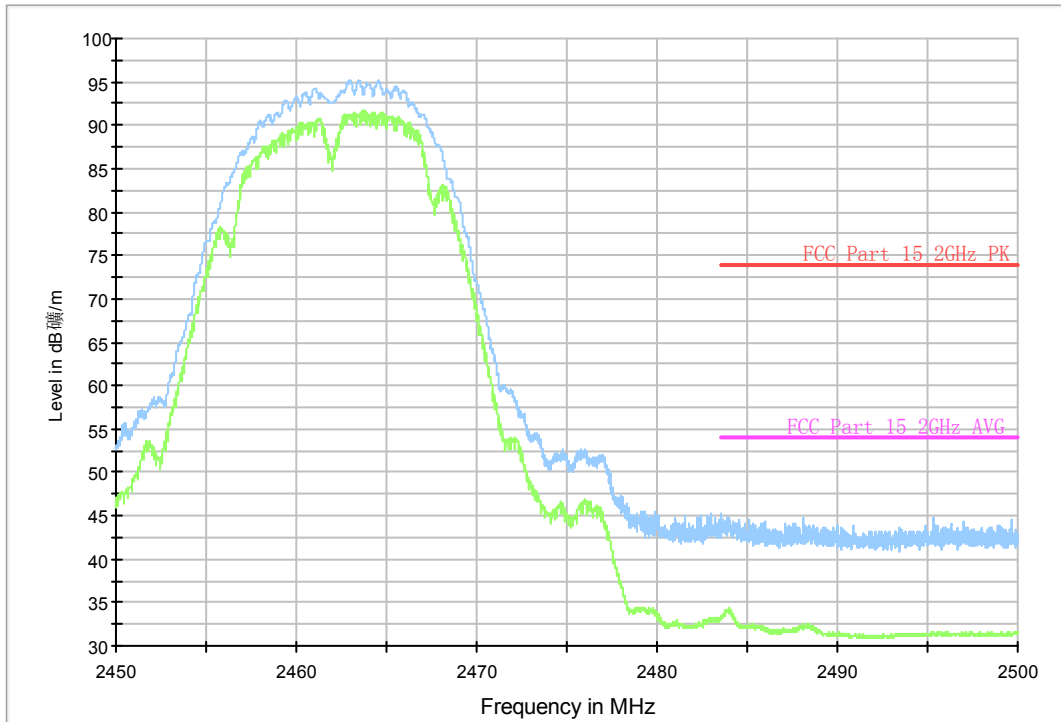


Fig.A.6.2.9 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

RE_WLAN_1G-3GHz

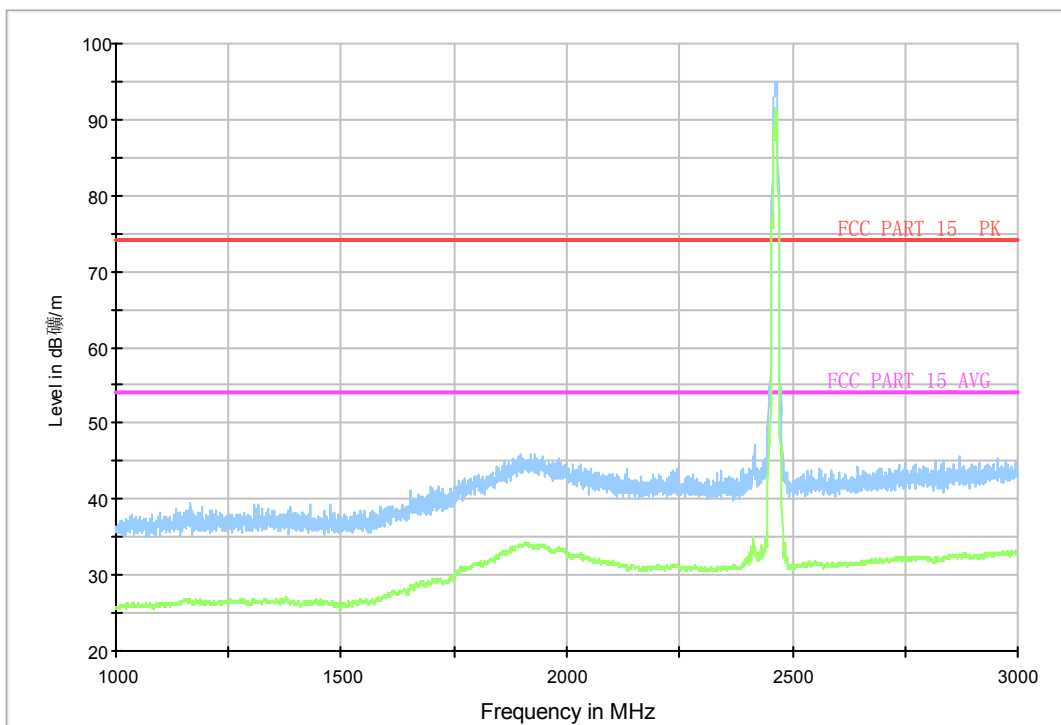


Fig.A.6.2.10 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 1 GHz-3 GHz)

Normal RE_3G-18GHz

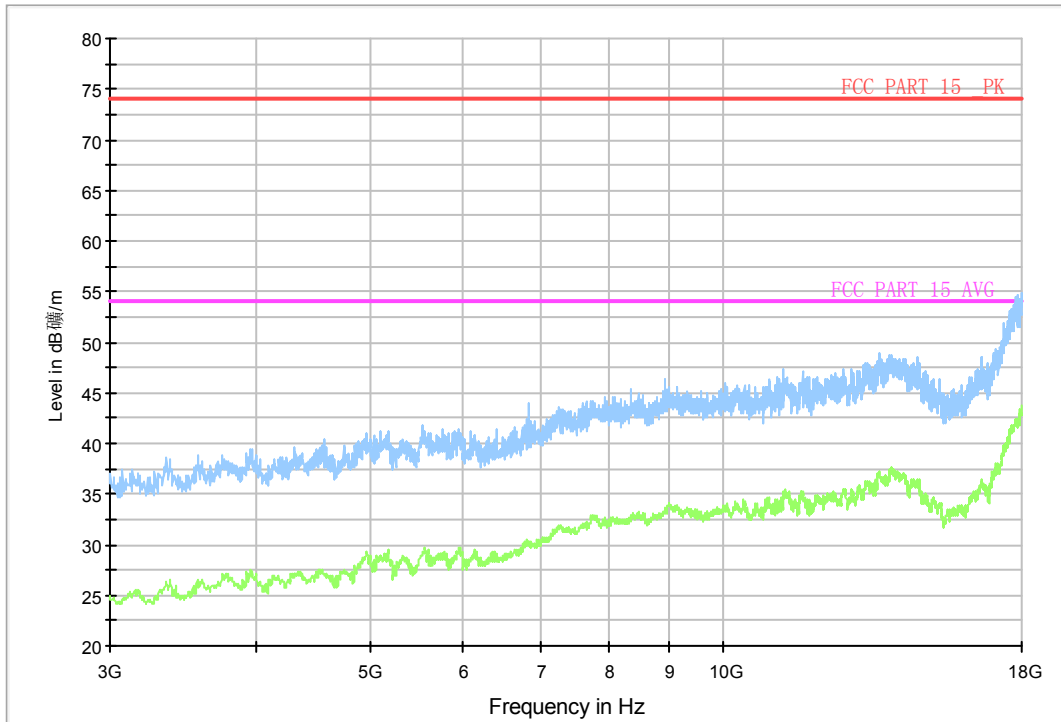


Fig.A.6.2.11 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 3 GHz-18 GHz)

RE-BT-Power_2.38G-2.43GHz

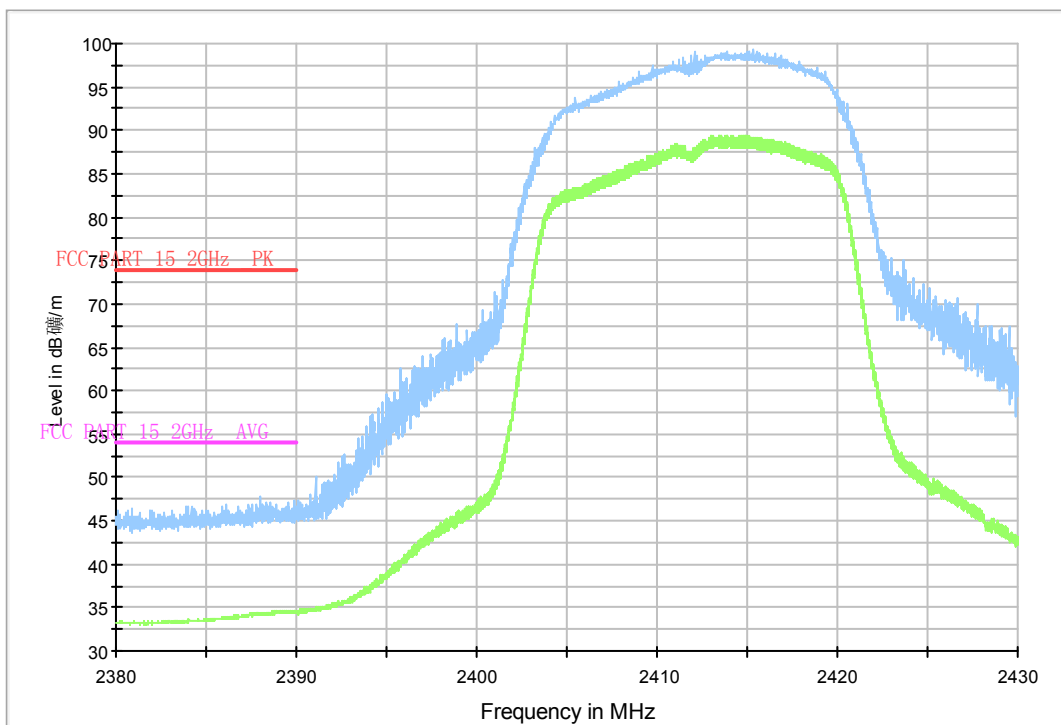


Fig.A.6.2.12 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

RE_WLAN_1G-3GHz

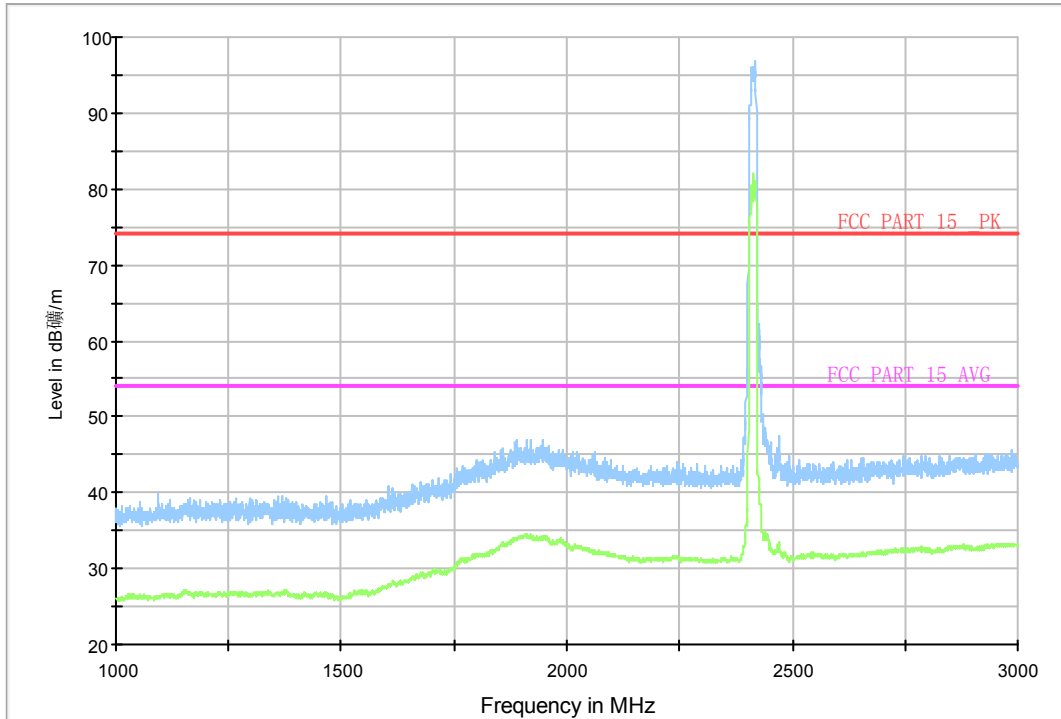


Fig.A.6.2.13 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 1 GHz-3 GHz)

Normal RE_3G-18GHz

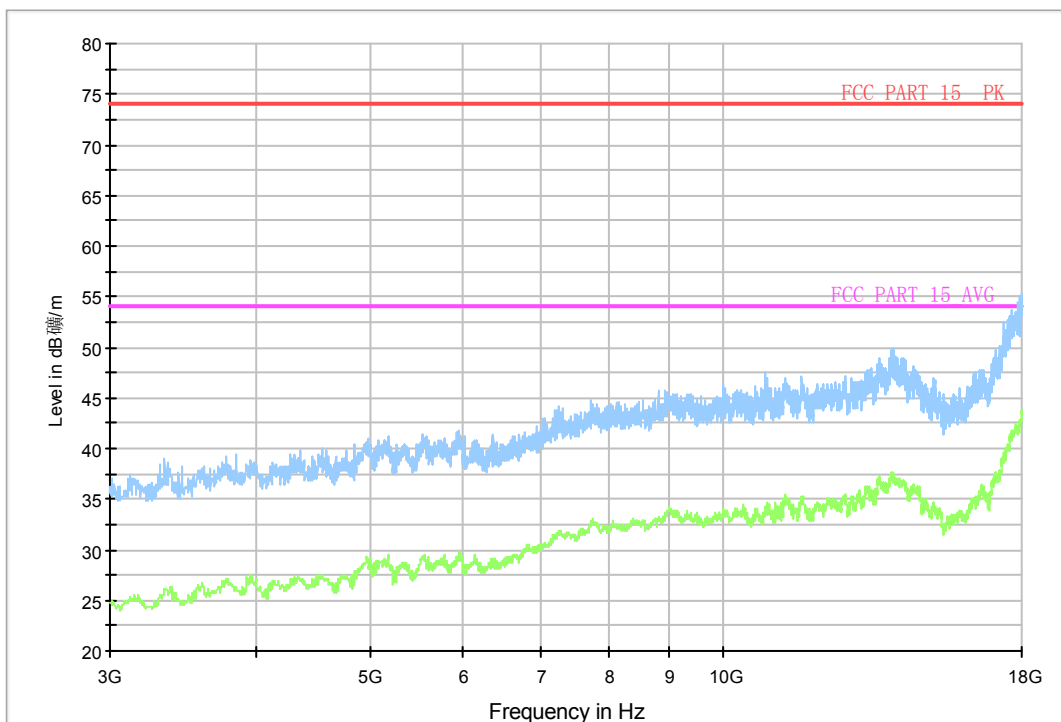


Fig.A.6.2.14 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 3 GHz-18 GHz)

Normal RE_30M-1GHz_10m

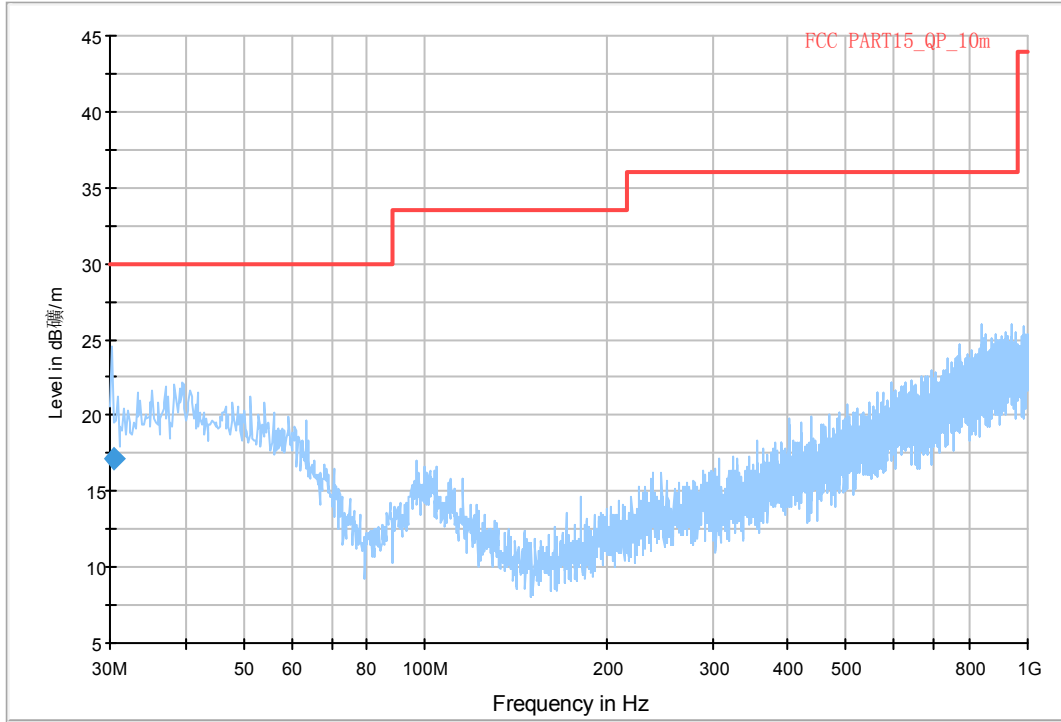


Fig.A.6.2.15 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 30 MHz-1 GHz)

RE_WLAN_1G-3GHz

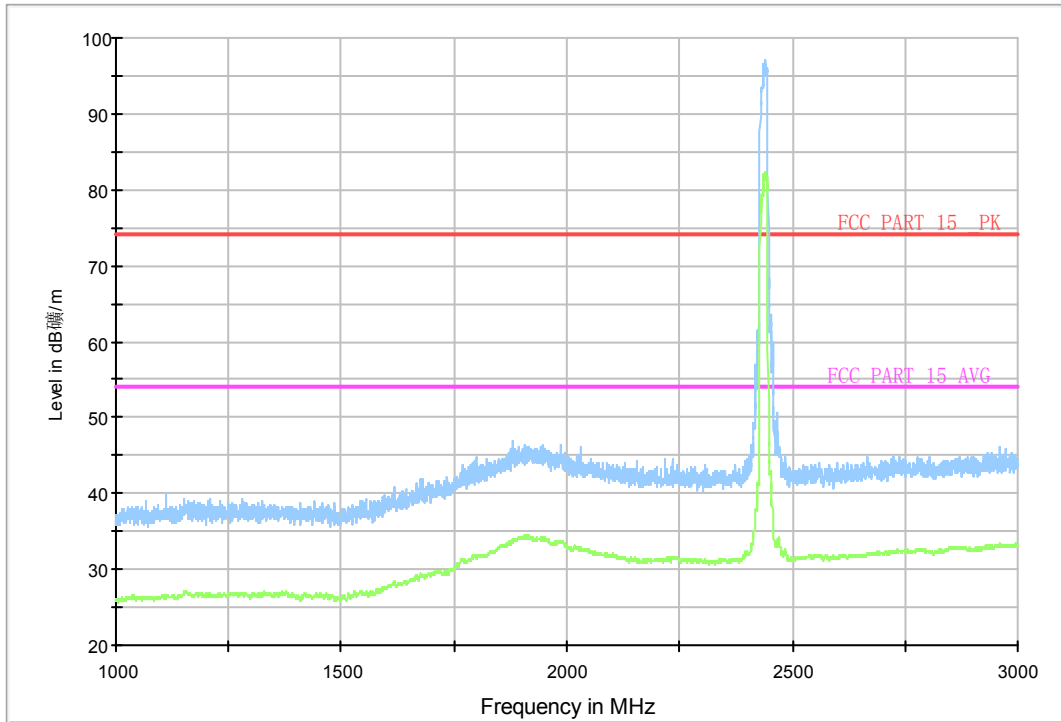


Fig.A.6.2.16 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 1 GHz-3 GHz)

Normal RE_3G-18GHz

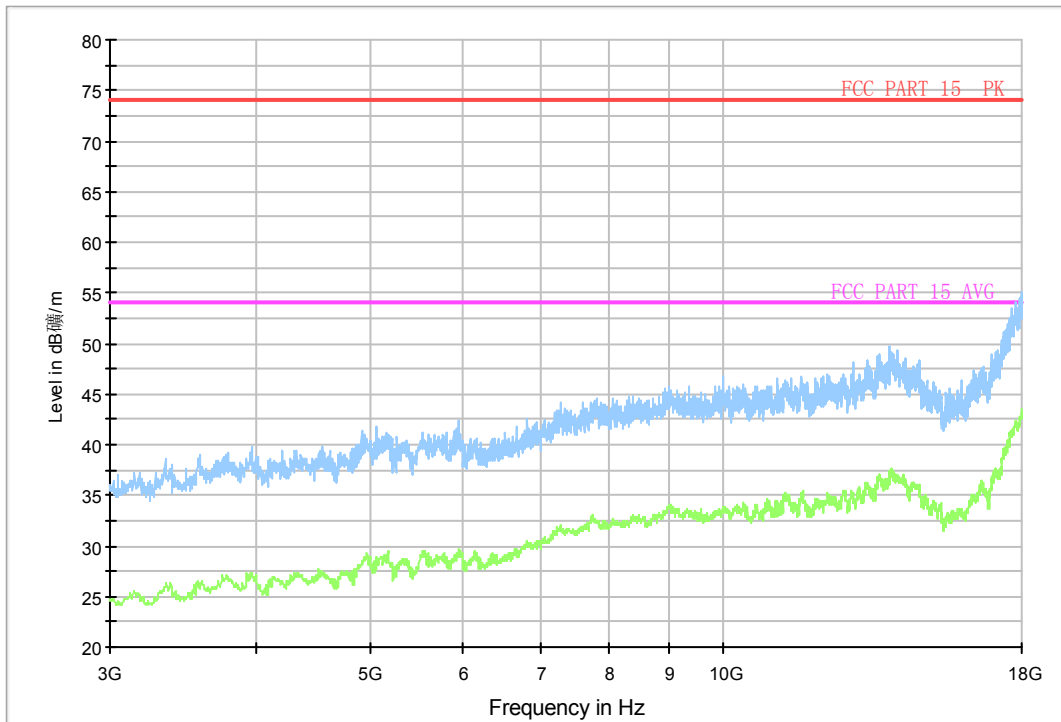


Fig.A.6.2.17 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 3 GHz-18 GHz)

Normal RE_18G-26.5GHz

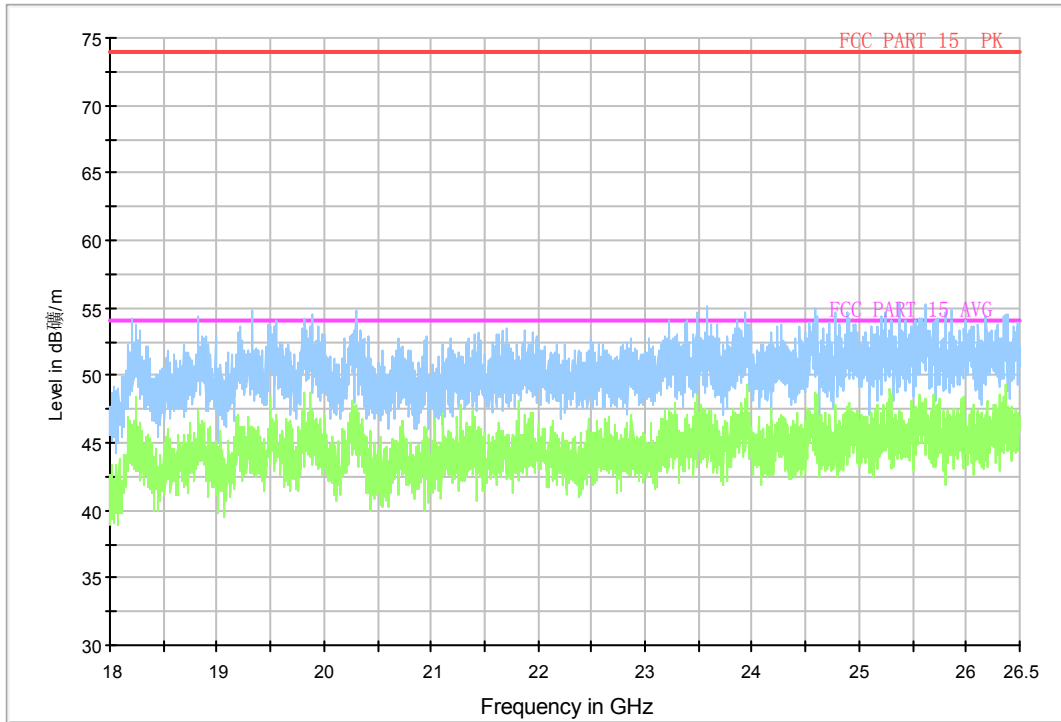


Fig.A.6.2.18 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 18GHz – 26.5GHz)

RE-Power_2.45G-2.5GHz

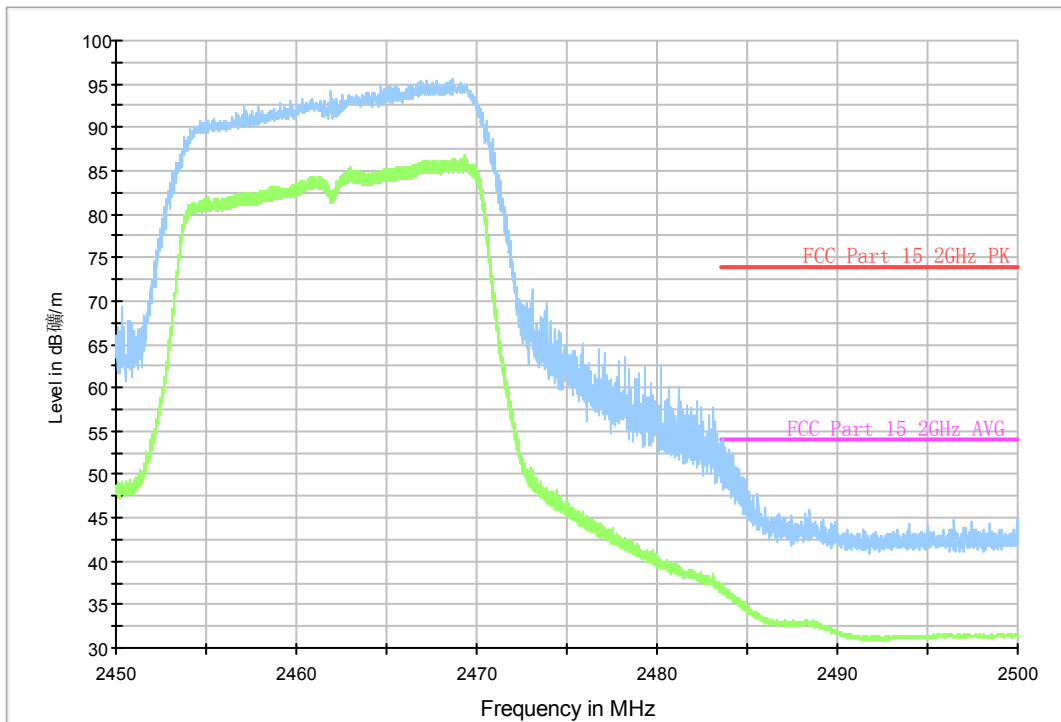


Fig.A.6.2.19 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

RE_WLAN_1G-3GHz

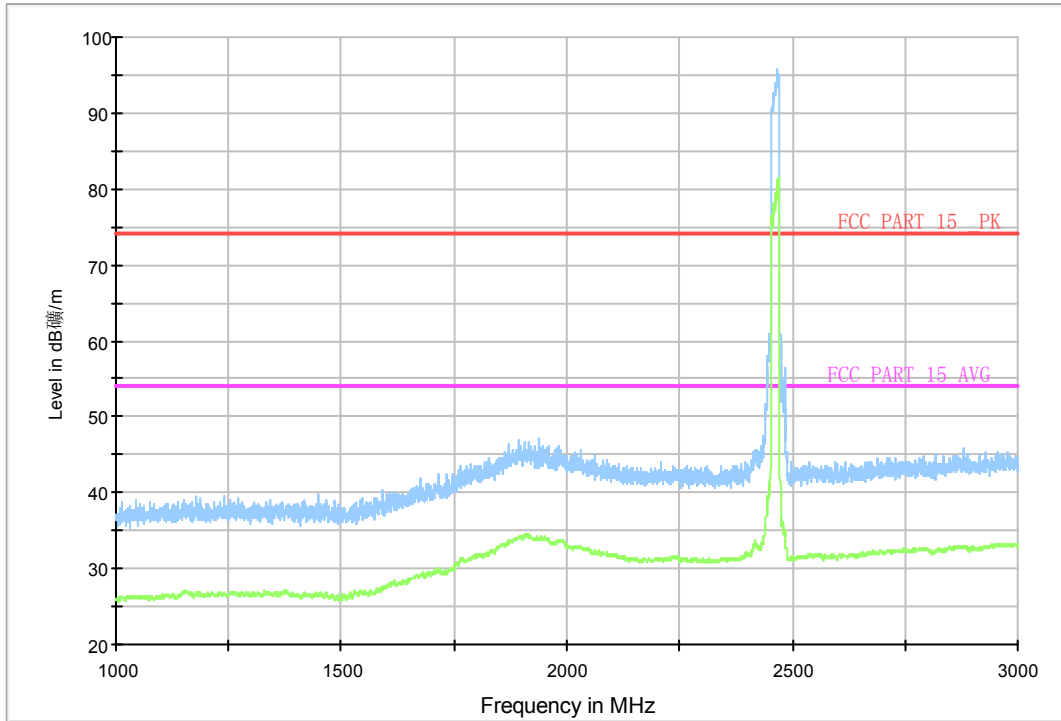


Fig.A.6.2.20 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 1 GHz-3 GHz)

Normal RE_3G-18GHz

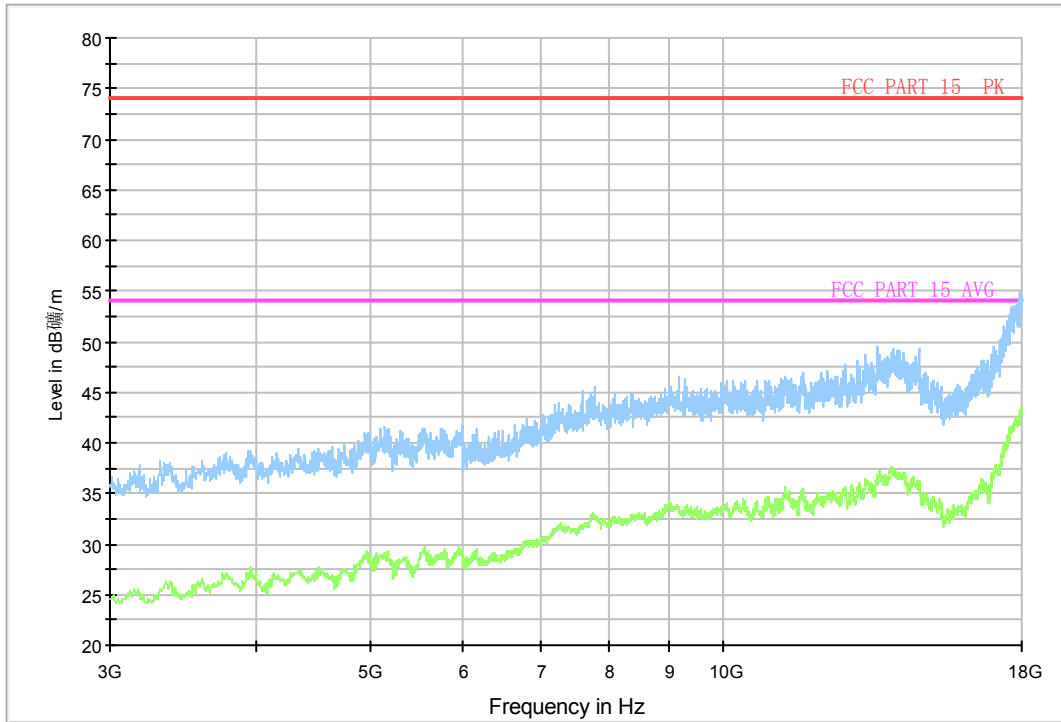


Fig.A.6.2.21 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 3 GHz-18 GHz)

RE-Power_2.38G-2.43GHz

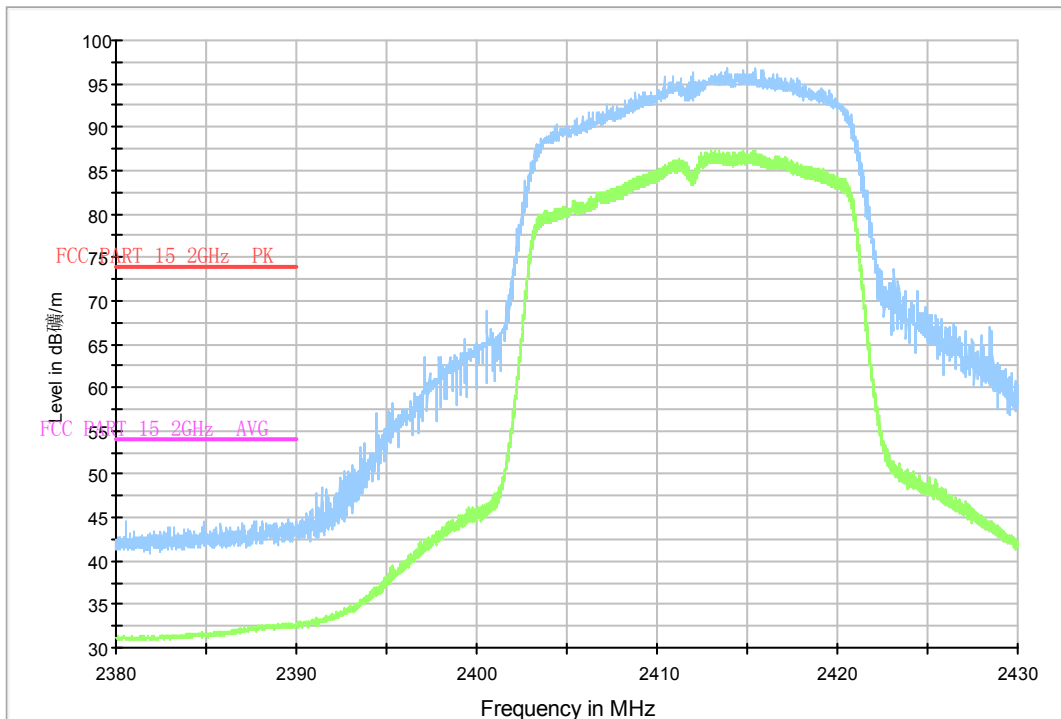


Fig.A.6.2.22 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

RE_WLAN_1G-3GHz

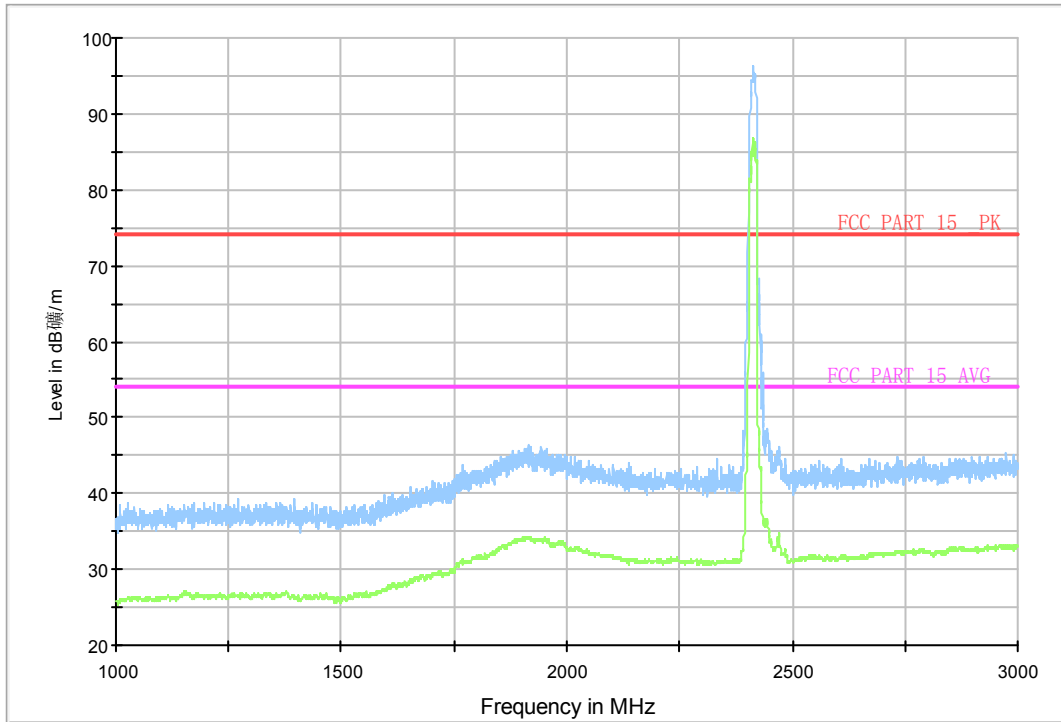


Fig.A.6.2.23 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 1 GHz-3 GHz)

Normal RE_3G-18GHz

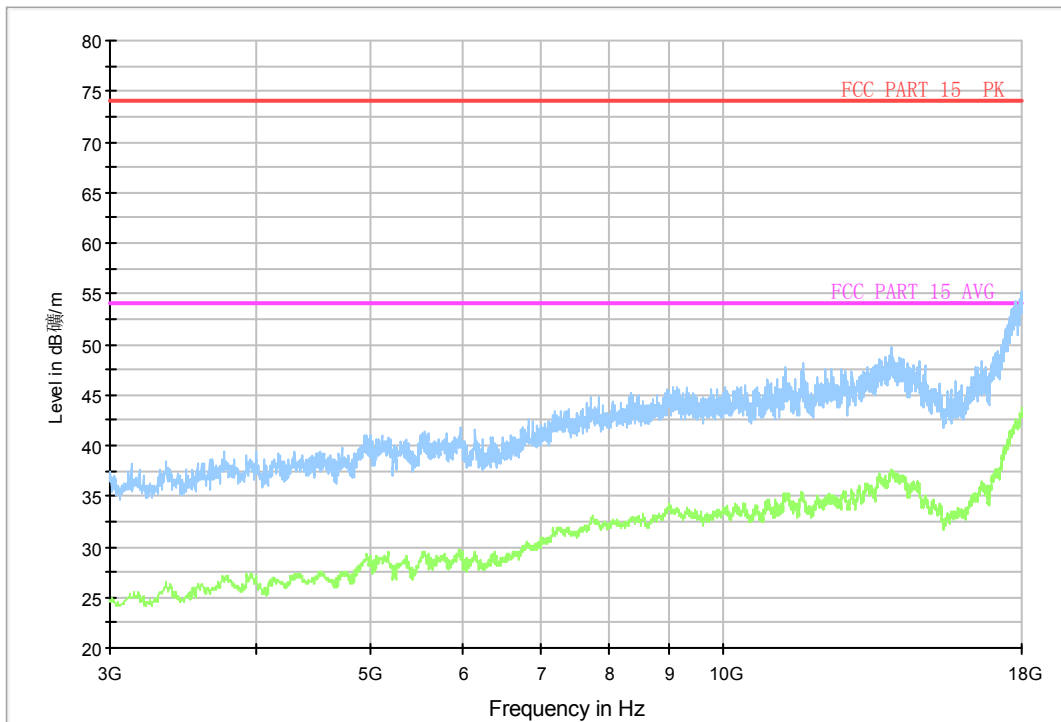


Fig.A.6.2.24 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 3 GHz-18 GHz)

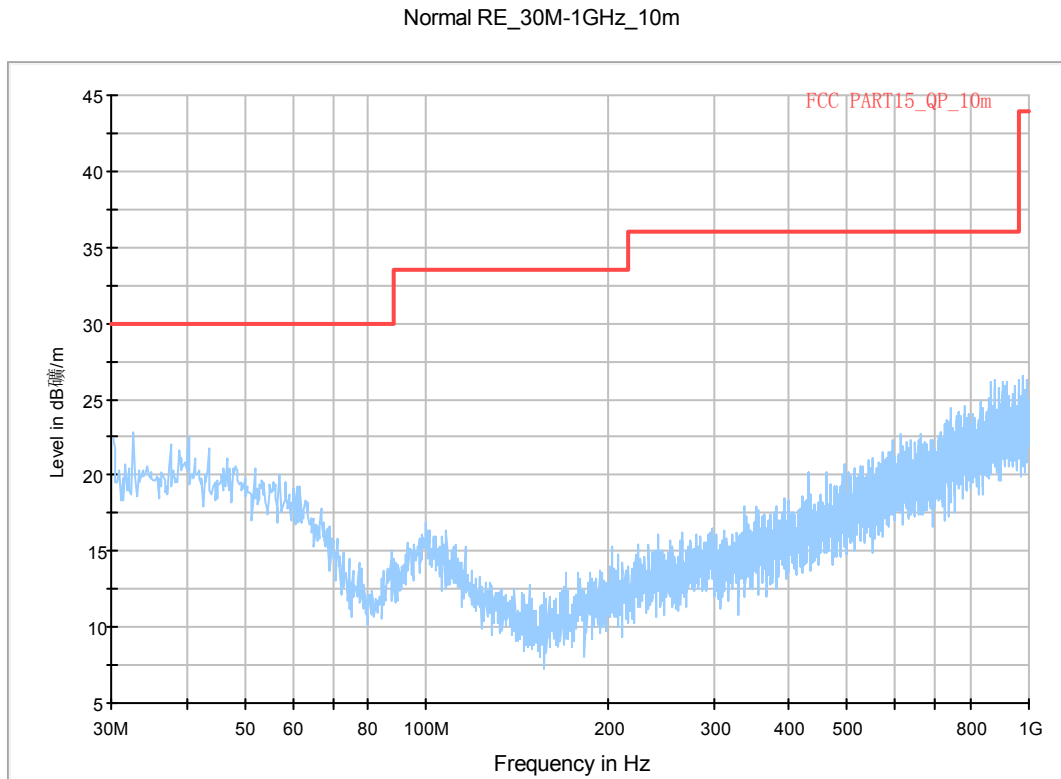


Fig.A.6.2.25 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 30 MHz-1 GHz)

RE_WLAN_1G-3GHz

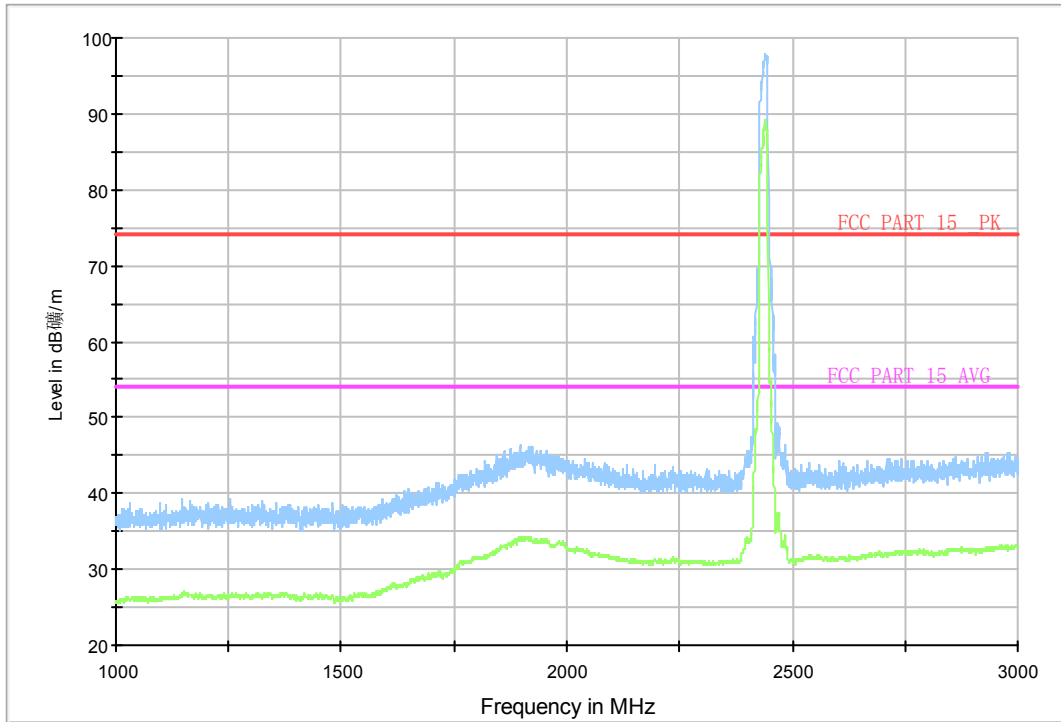


Fig.A.6.2.26 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 1 GHz-3 GHz)

Normal RE_3G-18GHz

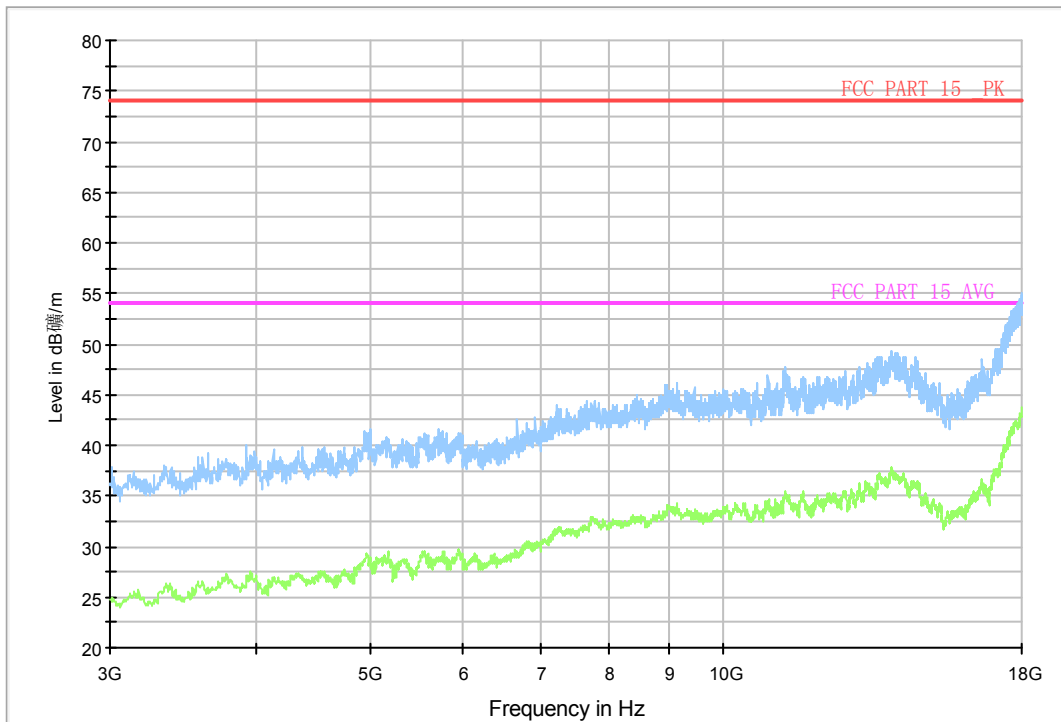


Fig.A.6.2.27 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 3 GHz-18 GHz)

GHz)

Normal RE_18G-26.5GHz

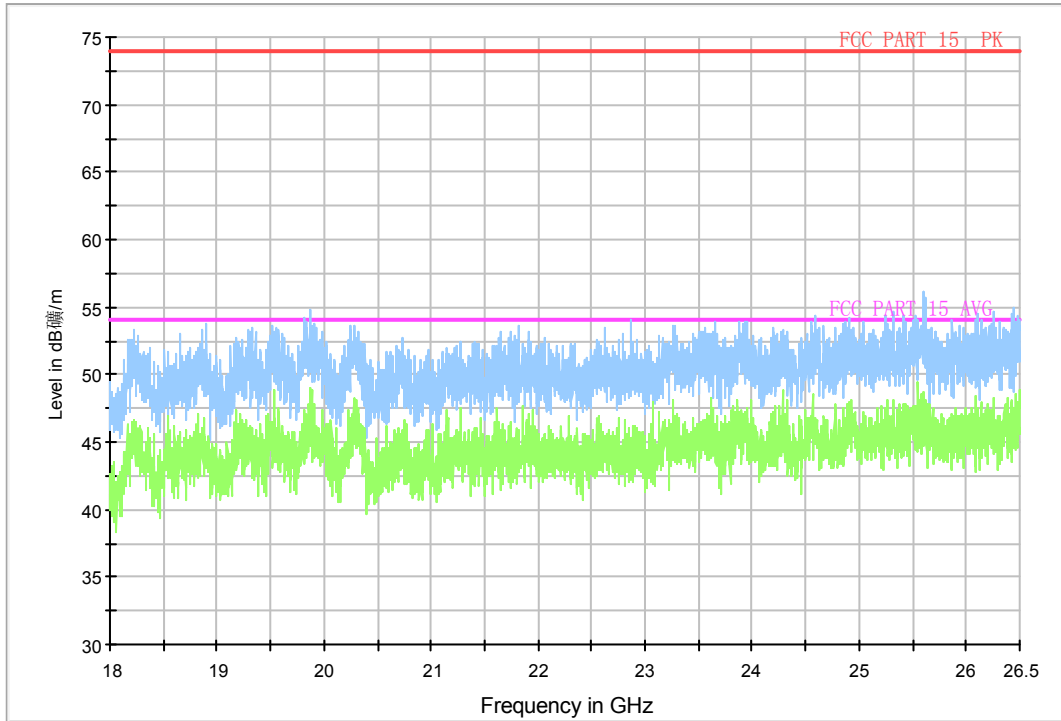


Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz – 26.5GHz)

RE-BT-Power_2.45G-2.5GHz

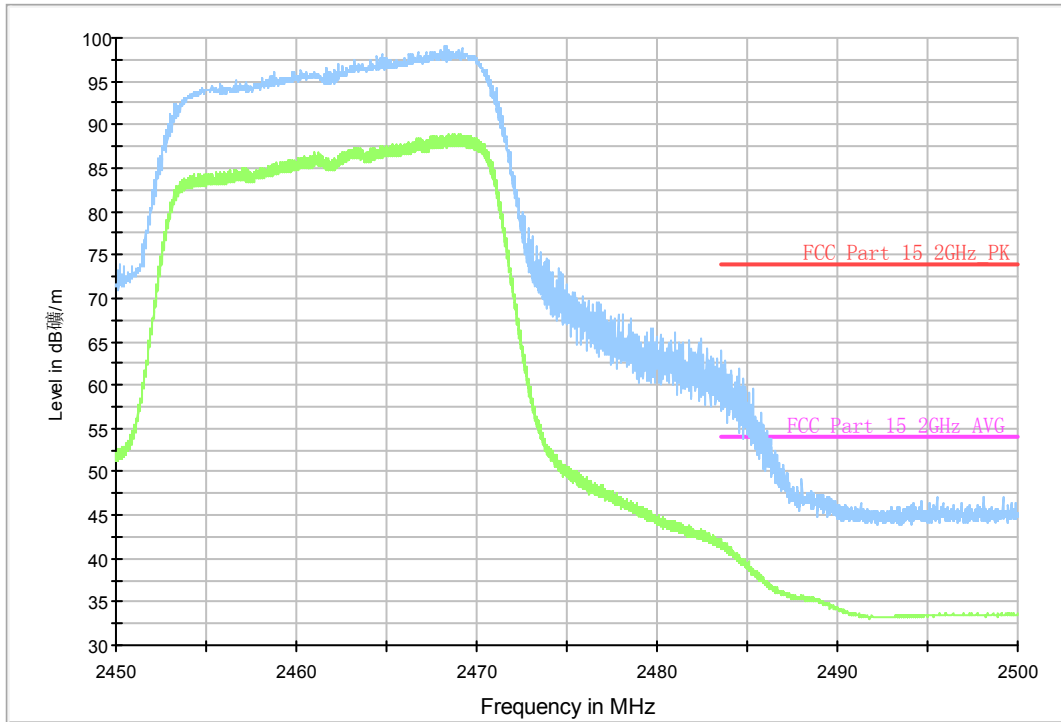


Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

RE_WLAN_1G-3GHz

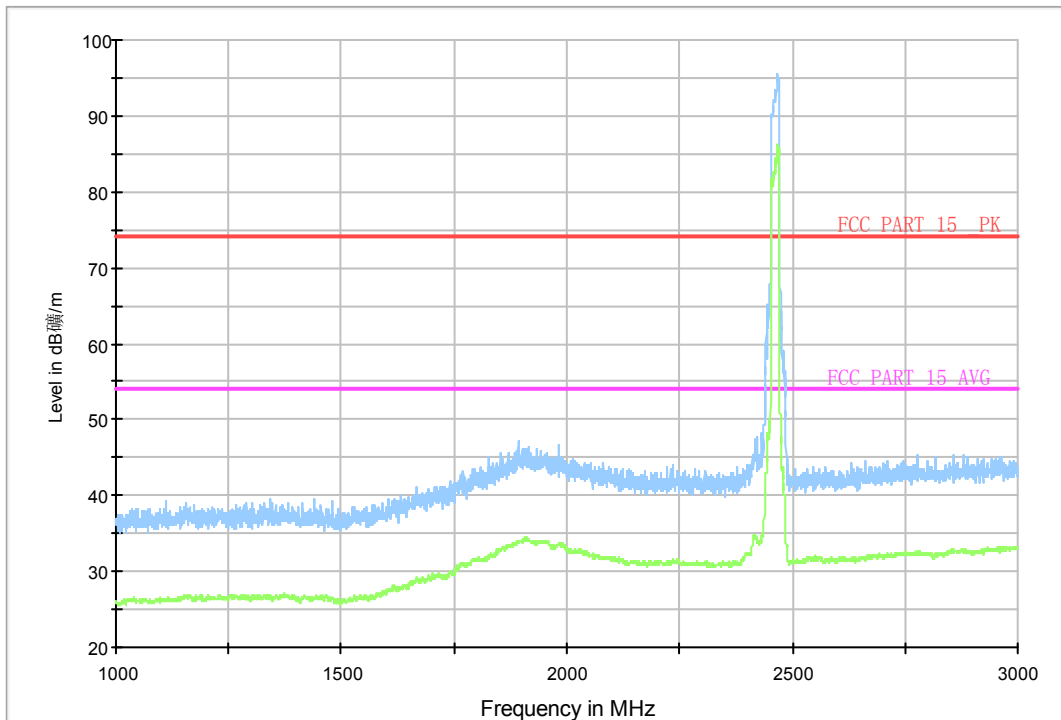


Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3

GHz)

Normal RE_3G-18GHz

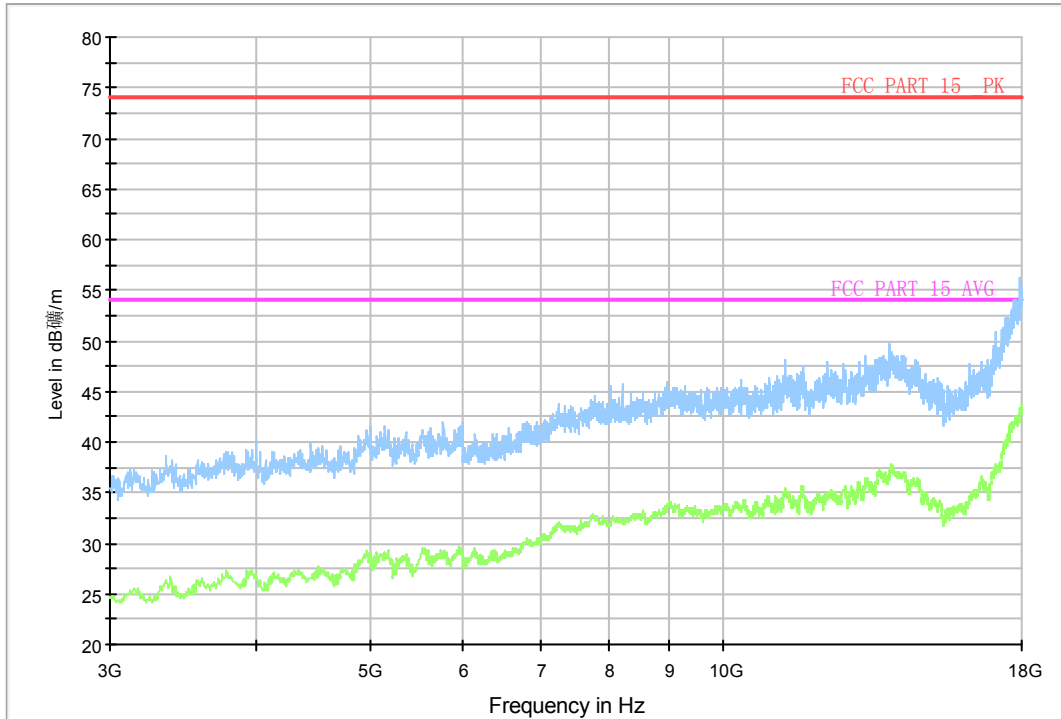


Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)

RE-Power_2.38G-2.43GHz

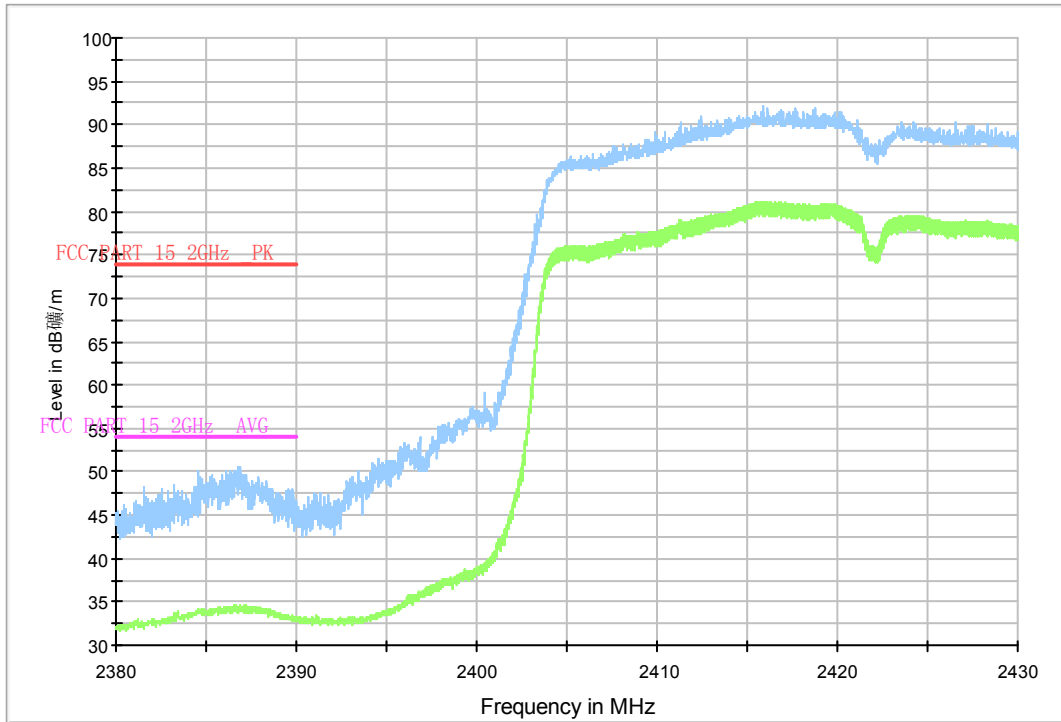


Fig.A.6.2.32 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.45GHz

RE_WLAN_1G-3GHz

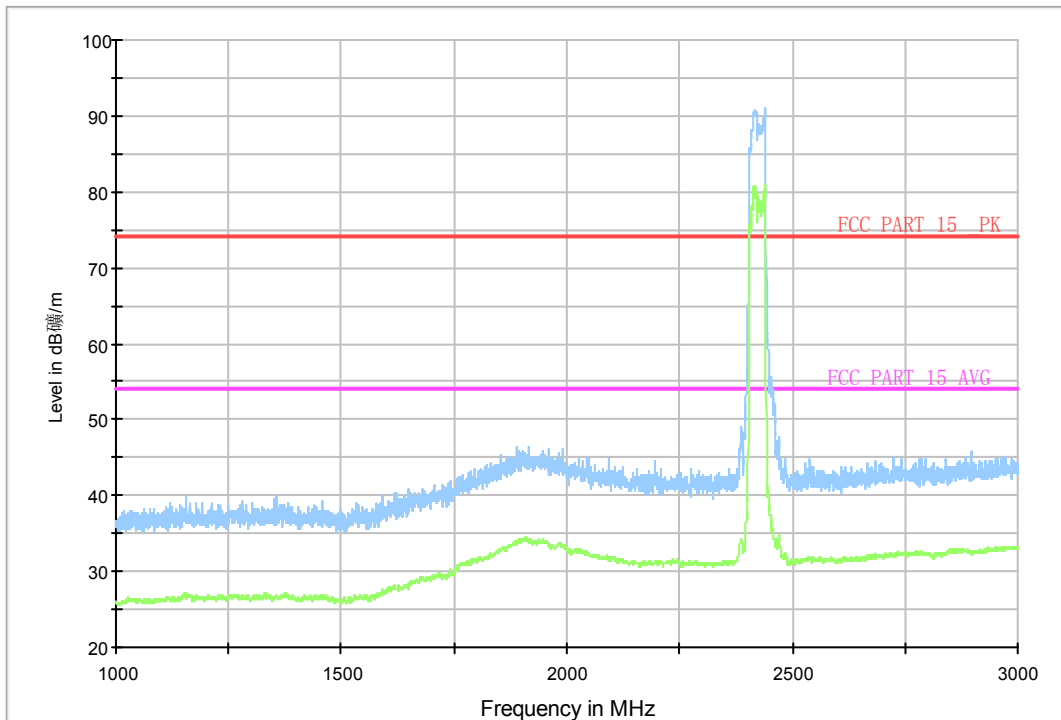


Fig.A.6.2.33 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 1 GHz-3

GHz)

Normal RE_3G-18GHz

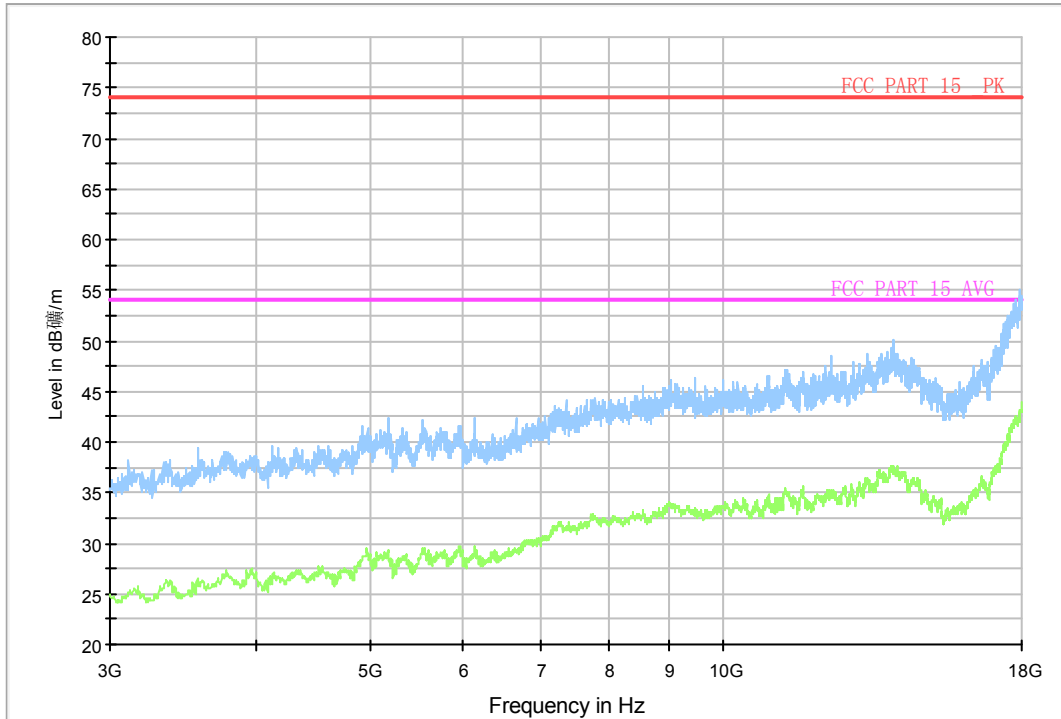


Fig.A.6.2.34 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 3 GHz-18 GHz)

Normal RE_30M-1GHz_10m

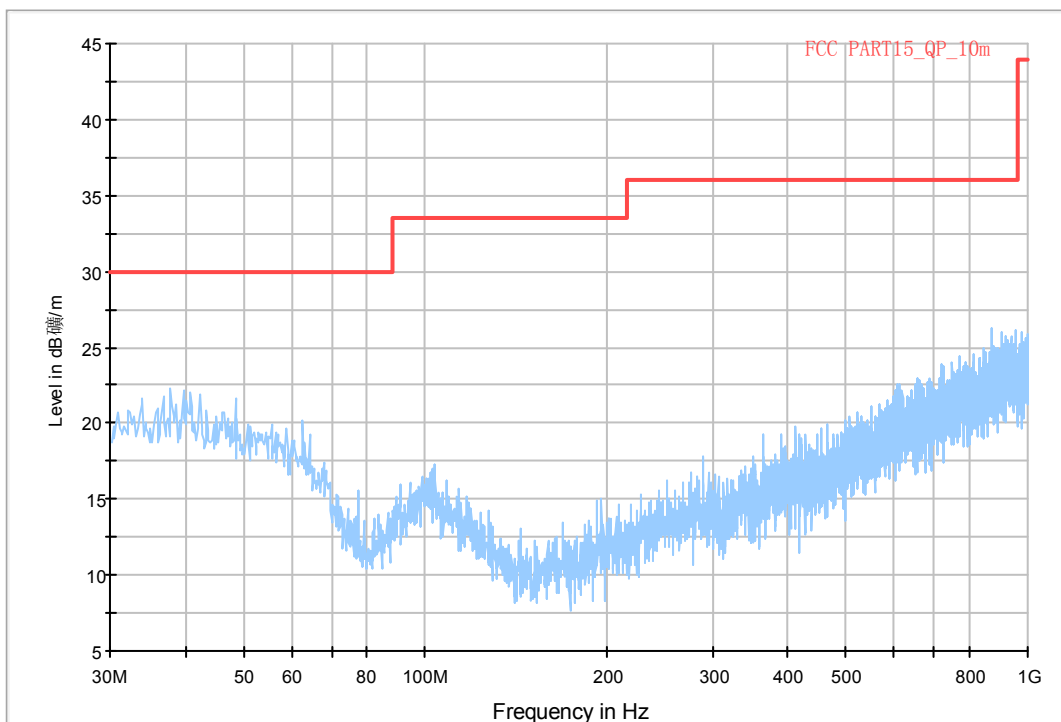


Fig.A.6.2.35 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 30 MHz-1 GHz)

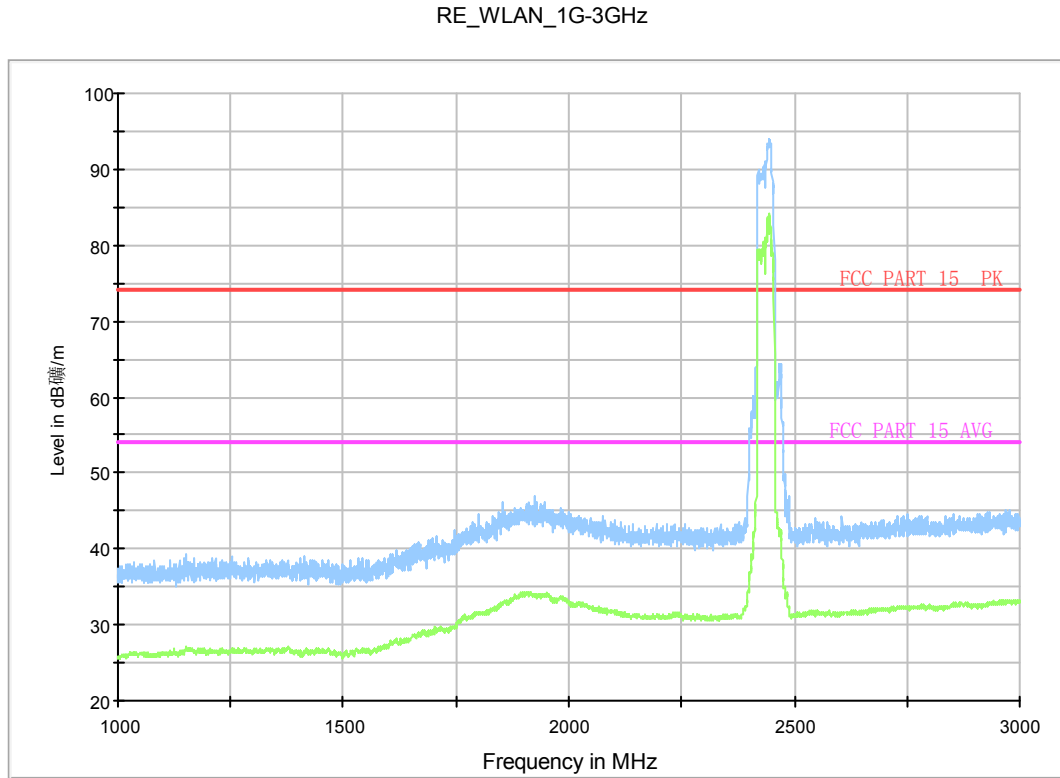


Fig.A.6.2.36 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 1 GHz-3 GHz)

Normal RE_3G-18GHz

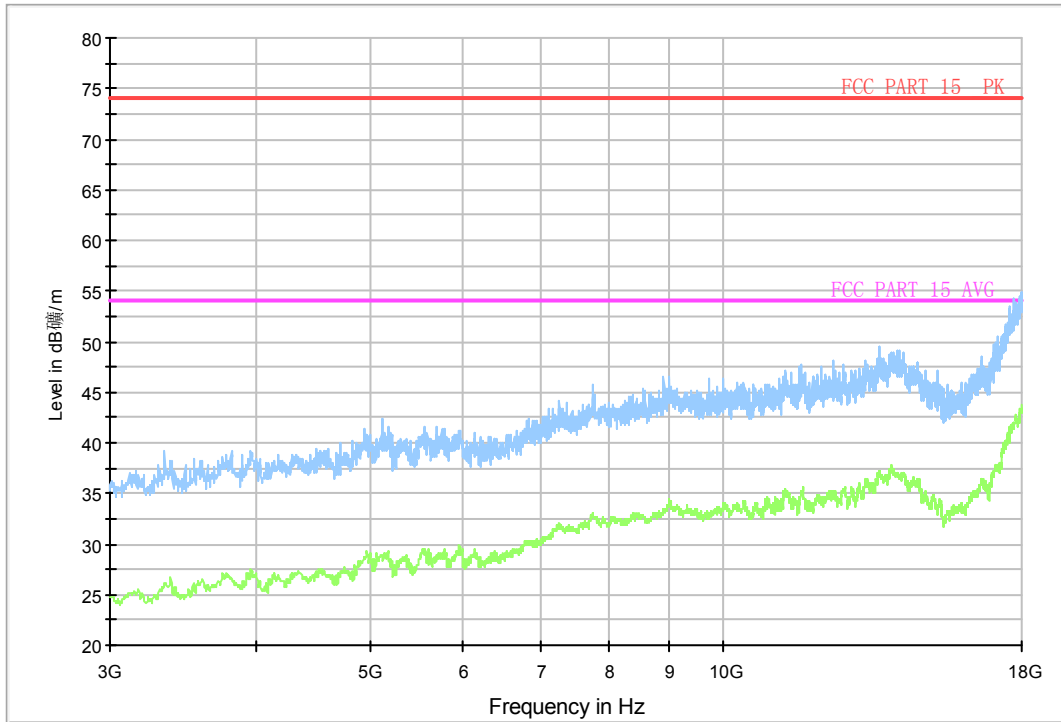


Fig.A.6.2.37 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 3 GHz-18 GHz)

Normal RE_18G-26.5GHz

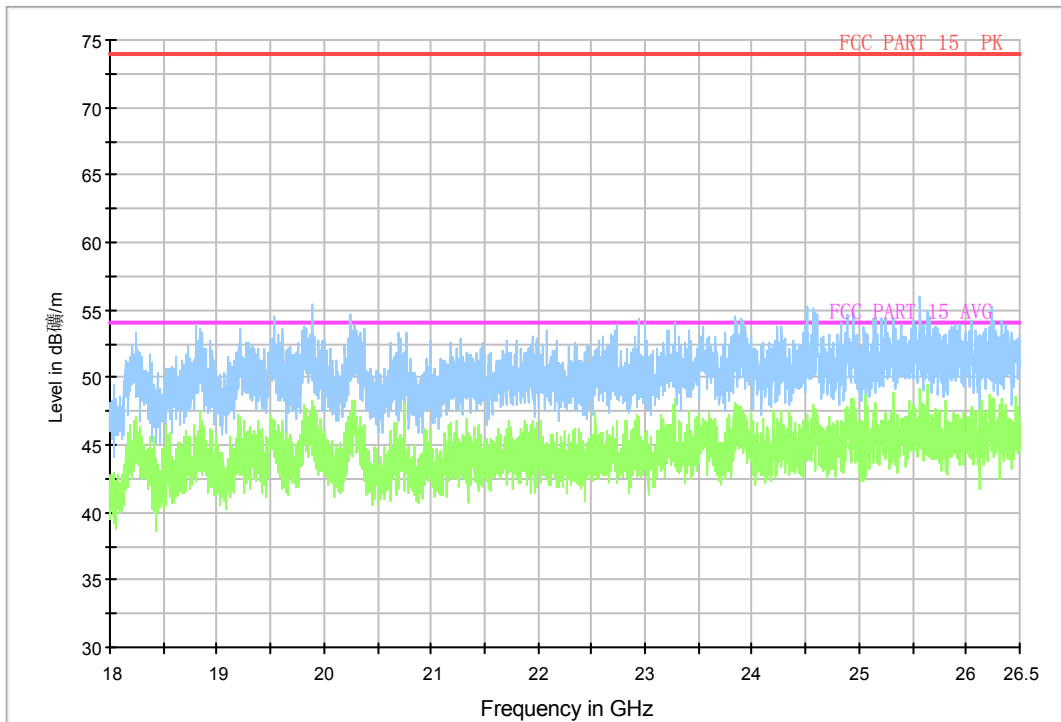


Fig.A.6.2.38 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 18GHz - 26.5GHz)

26.5GHz)

RE-Power_2.45G-2.5GHz

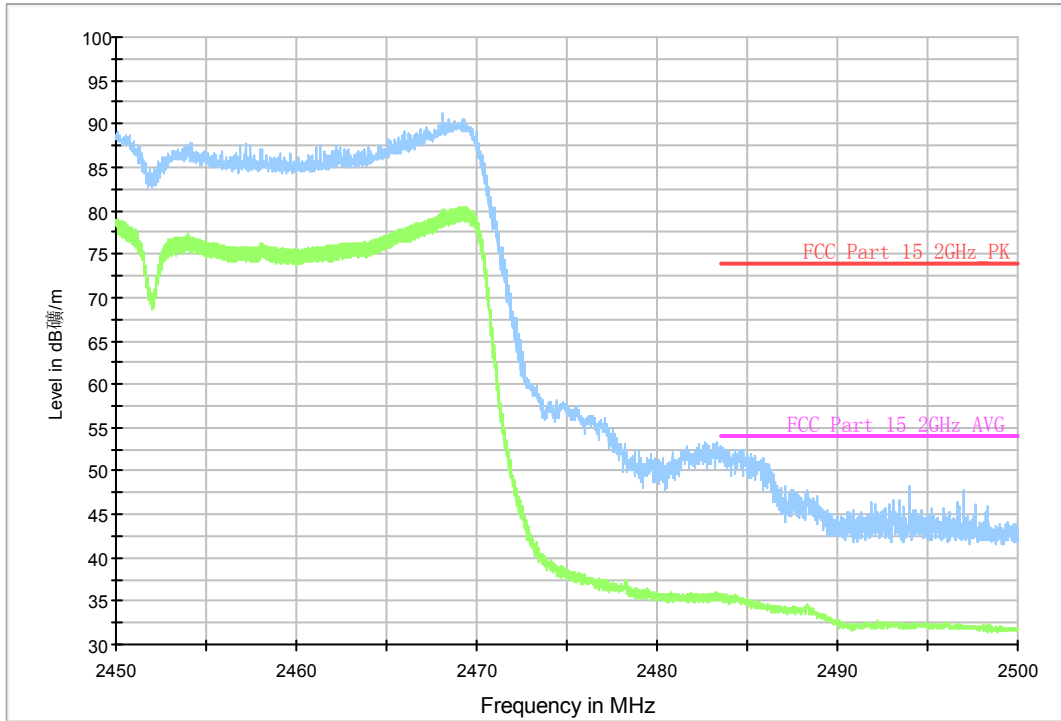


Fig.A.6.2.39 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

RE_WLAN_1G-3GHz

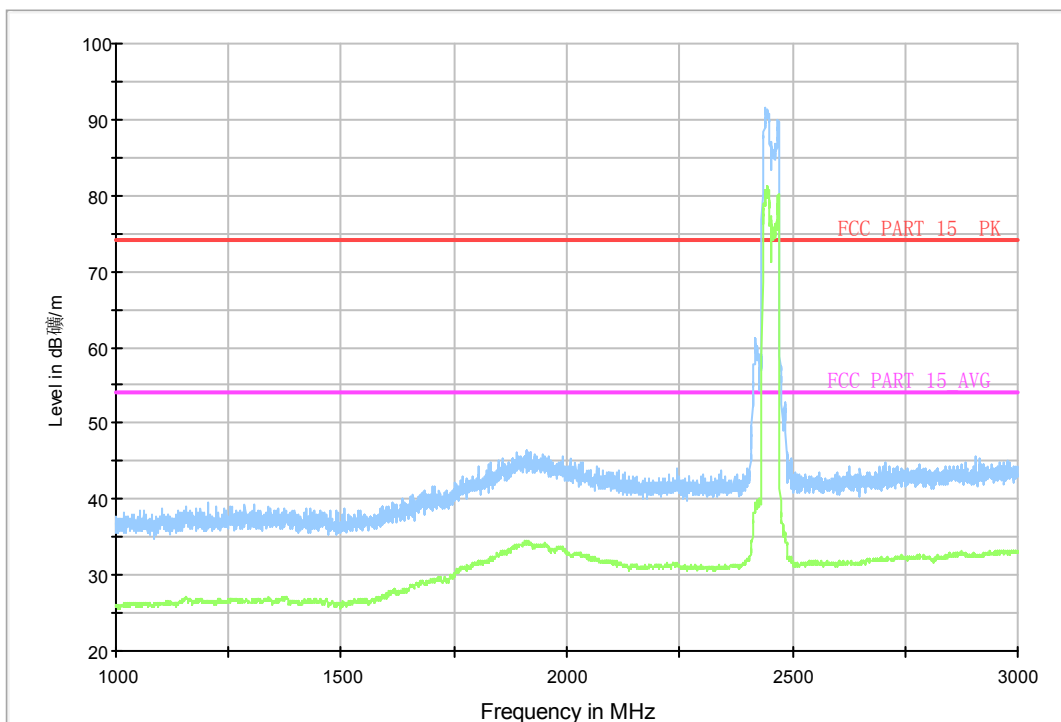


Fig.A.6.2.40 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 1 GHz-3 GHz)

Normal RE_3G-18GHz

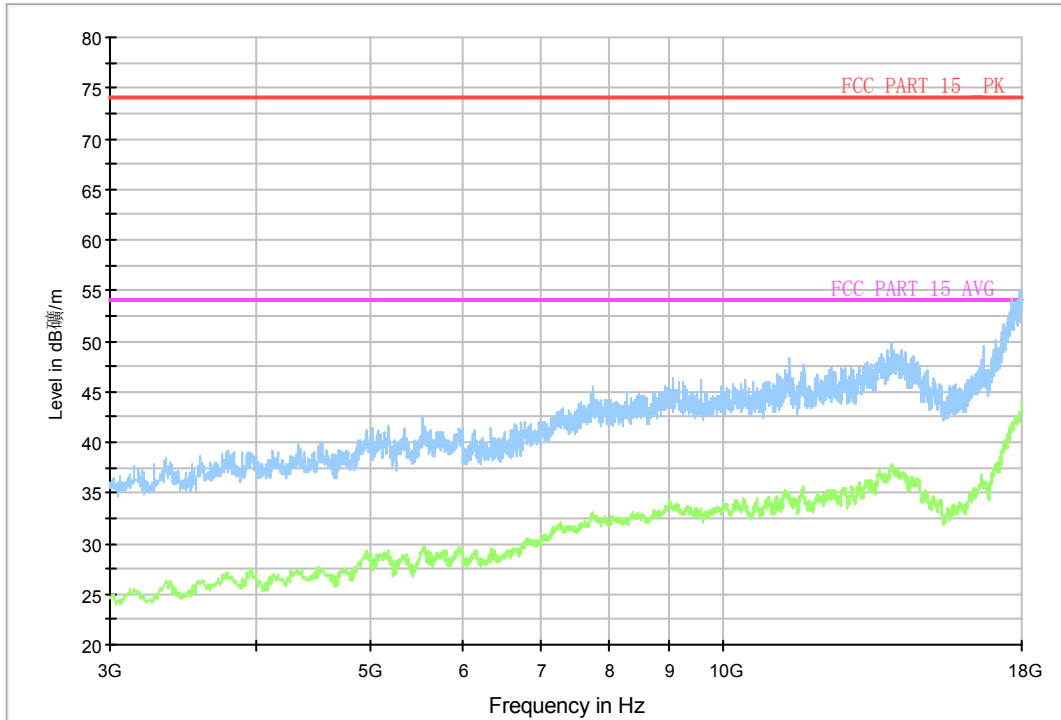


Fig.A.6.2.41 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 3 GHz-18 GHz)

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

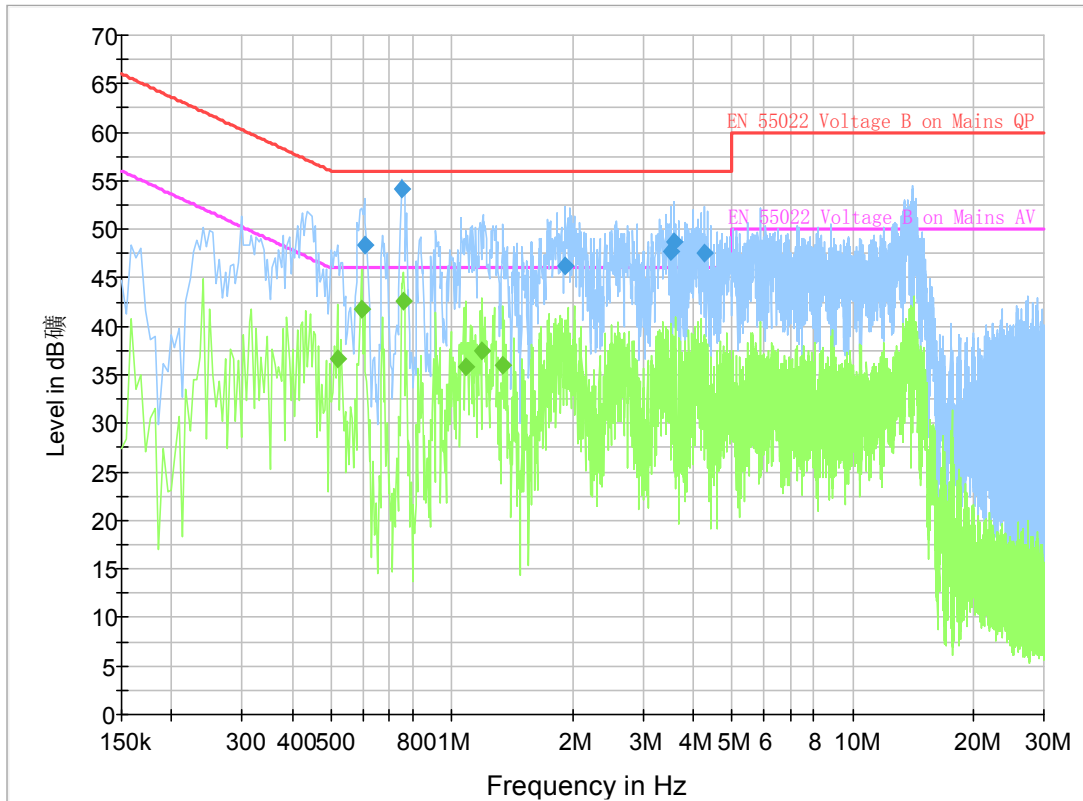


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.604500	48.4	2000.0	9.000	On	N	20.0	7.6	56.0
0.753000	54.2	2000.0	9.000	On	L1	19.9	1.8	56.0
1.914000	46.2	2000.0	9.000	On	L1	19.8	9.8	56.0
3.516000	47.7	2000.0	9.000	On	N	19.7	8.3	56.0
3.588000	48.7	2000.0	9.000	On	L1	19.7	7.3	56.0
4.272000	47.5	2000.0	9.000	On	N	19.6	8.5	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.519000	36.7	2000.0	9.000	On	L1	20.0	9.3	46.0
0.595500	41.8	2000.0	9.000	On	L1	20.0	4.2	46.0
0.757500	42.6	2000.0	9.000	On	N	19.9	3.4	46.0
1.081500	35.9	2000.0	9.000	On	N	19.8	10.1	46.0
1.189500	37.5	2000.0	9.000	On	N	19.8	8.5	46.0
1.342500	35.9	2000.0	9.000	On	L1	19.9	10.1	46.0

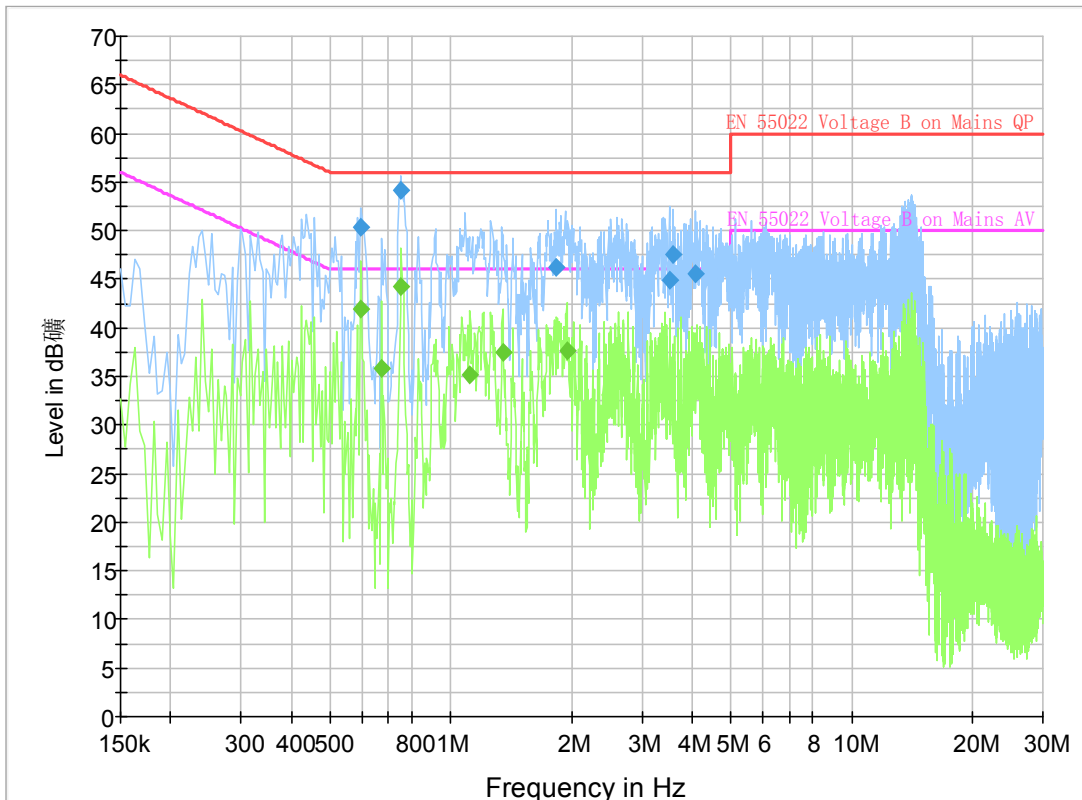


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1



Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.595500	50.4	2000.0	9.000	On	L1	20.0	5.6	56.0
0.753000	54.2	2000.0	9.000	On	N	19.9	1.8	56.0
1.833000	46.2	2000.0	9.000	On	N	19.8	9.8	56.0
3.502500	44.9	2000.0	9.000	On	N	19.7	11.1	56.0
3.588000	47.6	2000.0	9.000	On	N	19.7	8.4	56.0
4.065000	45.6	2000.0	9.000	On	L1	19.7	10.4	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.595500	42.0	2000.0	9.000	On	N	20.0	4.0	46.0
0.672000	35.9	2000.0	9.000	On	L1	20.0	10.1	46.0
0.753000	44.2	2000.0	9.000	On	L1	19.9	1.8	46.0
1.117500	35.2	2000.0	9.000	On	L1	19.8	10.8	46.0
1.347000	37.5	2000.0	9.000	On	N	19.8	8.5	46.0
1.945500	37.6	2000.0	9.000	On	L1	19.8	8.4	46.0

ANNEX B: Accreditation Certificate



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L0570)

**Telecommunication Technology Labs,
Academy of Telecommunication Research, MIIT**
No.52, Huayuan North Road, Haidian District, Beijing, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue: 2014-06-20
Date of Expiry: 2017-06-19
Date of Initial Accreditation: 1998-07-03
Date of Update: 2014-06-20



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0010044

END OF REPORT