



**FCC PART 15
TEST REPORT
No. I14Z46912-SRD12**

for

TCT Mobile Limited

Wi-Fi dual-band tablet

Model Name: D819

With

Hardware Version: PIO

Software Version: vJ58

Issued Date: 2014-09-18

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P.R.China 100191

Tel: +86(0)10-62304633-2561, Fax: +86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

CONTENTS	2
1. TEST LATORATORY	7
1.1. TESTING LOCATION	7
1.2. PROJECT DATA.....	7
1.3. SIGNATURE	7
2. CLIENT INFORMATION	8
2.1. APPLICANT INFORMATION	8
2.2. MANUFACTURER INFORMATION.....	8
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	9
3.1. ABOUT EUT.....	9
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	9
3.4. GENERAL DESCRIPTION	9
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
6.1. SUMMARY OF TEST RESULTS.....	11
6.2. STATEMENTS.....	11
6.3. TEST CONDITIONS.....	11
7. TEST EQUIPMENTS UTILIZED	12
ANNEX A: MEASUREMENT RESULTS	13
A.1. MEASUREMENT METHOD	13
A.2. MAXIMUM OUTPUT POWER.....	14
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED)	15
A.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED)	17
FIG. 1 OCCUPIED 26DB BANDWIDTH (802.11A, 5180MHZ).....	18
FIG. 2 OCCUPIED 26DB BANDWIDTH (802.11A, 5200MHZ).....	18
FIG. 3 OCCUPIED 26DB BANDWIDTH (802.11A, 5240MHZ).....	19
FIG. 4 OCCUPIED 26DB BANDWIDTH (802.11A, 5260MHZ).....	19
FIG. 5 OCCUPIED 26DB BANDWIDTH (802.11A, 5280MHZ).....	20
FIG. 6 OCCUPIED 26DB BANDWIDTH (802.11A, 5320MHZ).....	20
FIG. 7 OCCUPIED 26DB BANDWIDTH (802.11A, 5500MHZ).....	21
FIG. 8 OCCUPIED 26DB BANDWIDTH (802.11A, 5600MHZ).....	21
FIG. 9 OCCUPIED 26DB BANDWIDTH (802.11A, 5700MHZ).....	22
FIG. 10 OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5180MHZ).....	22

FIG. 11	OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5200MHZ).....	23
FIG. 12	OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5240MHZ).....	23
FIG. 13	OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5260MHZ).....	24
FIG. 14	OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5280MHZ).....	24
FIG. 15	OCCUPIED 26DB BANDWIDTH (802.11N-HT20, 5320MHZ).....	25
FIG. 16	OCCUPIED 26DB BANDWIDTH (802. 11N-HT20, 5500MHZ).....	25
FIG. 17	OCCUPIED 26DB BANDWIDTH (802. 11N-HT20, 5600MHZ).....	26
FIG. 18	OCCUPIED 26DB BANDWIDTH (802. 11N-HT20, 5700MHZ).....	26
FIG. 19	OCCUPIED 26DB BANDWIDTH (802.11N-HT40, 5190MHZ).....	27
FIG. 20	OCCUPIED 26DB BANDWIDTH (802.11N-HT40, 5230MHZ).....	27
FIG. 21	OCCUPIED 26DB BANDWIDTH (802.11N-HT40, 5270MHZ).....	28
FIG. 22	OCCUPIED 26DB BANDWIDTH (802.11N-HT40, 5310MHZ).....	28
FIG. 23	OCCUPIED 26DB BANDWIDTH (802. 11N-HT40, 5510MHZ).....	29
FIG. 24	OCCUPIED 26DB BANDWIDTH (802. 11N-HT40, 5590MHZ).....	29
FIG. 25	OCCUPIED 26DB BANDWIDTH (802. 11N-HT40, 5670MHZ).....	30
A.5. BAND EDGES COMPLIANCE		31
A5.1 BAND EDGES - CONDUCTED		31
FIG. 26	BAND EDGES (802.11A, 5180MHZ)	32
FIG. 27	BAND EDGES (802.11A, 5320MHZ)	32
FIG. 28	BAND EDGES (802.11A, 5500MHZ)	33
FIG. 29	BAND EDGES (802.11N-HT20, 5180MHZ).....	34
FIG. 30	BAND EDGES (802.11N-HT20, 5320MHZ).....	34
FIG. 31	BAND EDGES (802.11N-HT20, 5500MHZ).....	35
FIG. 32	BAND EDGES (802.11N-HT40, 5190MHZ).....	36
FIG. 33	BAND EDGES (802.11N-HT40, 5310MHZ).....	36
FIG. 34	BAND EDGES (802.11N-HT40, 5510MHZ).....	37
A5.2 BAND EDGES - RADIATED.....		38
FIG. 35	BAND EDGES (802.11A, 5180MHZ)	39
FIG. 36	BAND EDGES (802.11A, 5320MHZ)	39
FIG. 37	BAND EDGES (802.11A, 5550MHZ)	40
FIG. 38	BAND EDGES (802.11N-HT20, 5180MHZ).....	41
FIG. 39	BAND EDGES (802.11N-HT20, 5320MHZ).....	41
FIG. 40	BAND EDGES (802.11N-HT20, 5500MHZ).....	42
FIG. 41	BAND EDGES (802.11N-HT40, 5190MHZ).....	43
FIG. 42	BAND EDGES (802.11N-HT40, 5310MHZ).....	43
FIG. 43	BAND EDGES (802.11N-HT40, 5510MHZ).....	44
A.6. TRANSMITTER SPURIOUS EMISSION		45
FIG. 44	RADIATED SPURIOUS EMISSION (802.11A, CH36, 1 GHZ-6 GHZ).....	55
FIG. 45	RADIATED SPURIOUS EMISSION (802.11A, CH36, 6 GHZ-18 GHZ).....	56
FIG. 46	RADIATED SPURIOUS EMISSION (802.11A, CH40, 30 MHZ-1 GHZ).....	56
FIG. 47	RADIATED SPURIOUS EMISSION (802.11A, CH40, 1 GHZ-6 GHZ).....	57
FIG. 48	RADIATED SPURIOUS EMISSION (802.11A, CH40, 6 GHZ-18 GHZ).....	57
FIG. 49	RADIATED SPURIOUS EMISSION (802.11A, CH40, 18 GHZ-26.5 GHZ).....	58
FIG. 50	RADIATED SPURIOUS EMISSION (802.11A, CH40, 26.5 GHZ-40 GHZ).....	58

FIG. 51	RADIATED SPURIOUS EMISSION (802.11A, CH48, 1 GHZ-6 GHZ).....	59
FIG. 52	RADIATED SPURIOUS EMISSION (802.11A, CH48, 6 GHZ-18 GHZ).....	59
FIG. 53	RADIATED SPURIOUS EMISSION (802.11A, CH52, 1 GHZ-6 GHZ).....	60
FIG. 54	RADIATED SPURIOUS EMISSION (802.11A, CH52, 6 GHZ-18 GHZ).....	60
FIG. 55	RADIATED SPURIOUS EMISSION (802.11A, CH56, 30 MHZ-1 GHZ).....	61
FIG. 56	RADIATED SPURIOUS EMISSION (802.11A, CH56, 1 GHZ-6 GHZ).....	61
FIG. 57	RADIATED SPURIOUS EMISSION (802.11A, CH56, 6 GHZ-18 GHZ).....	62
FIG. 58	RADIATED SPURIOUS EMISSION (802.11A, CH56, 18 GHZ-26.5 GHZ).....	62
FIG. 59	RADIATED SPURIOUS EMISSION (802.11A, CH56, 26.5 GHZ-40 GHZ).....	63
FIG. 60	RADIATED SPURIOUS EMISSION (802.11A, CH64, 1 GHZ-6 GHZ).....	63
FIG. 61	RADIATED SPURIOUS EMISSION (802.11A, CH64, 6 GHZ-18 GHZ).....	64
FIG. 62	RADIATED SPURIOUS EMISSION (802.11A, CH100, 1 GHZ-6 GHZ).....	64
FIG. 63	RADIATED SPURIOUS EMISSION (802.11A, CH100, 6 GHZ-18 GHZ).....	65
FIG. 64	RADIATED SPURIOUS EMISSION (802.11A, CH116, 30 MHZ-1 GHZ).....	65
FIG. 65	RADIATED SPURIOUS EMISSION (802.11A, CH116, 1 GHZ-6 GHZ).....	66
FIG. 66	RADIATED SPURIOUS EMISSION (802.11A, CH116, 6 GHZ-18 GHZ).....	66
FIG. 67	RADIATED SPURIOUS EMISSION (802.11A, CH116, 18 GHZ-26.5 GHZ).....	67
FIG. 68	RADIATED SPURIOUS EMISSION (802.11A, CH116, 26.5 GHZ-40 GHZ).....	67
FIG. 69	RADIATED SPURIOUS EMISSION (802.11A, CH140, 1 GHZ-6 GHZ).....	68
FIG. 70	RADIATED SPURIOUS EMISSION (802.11A, CH140, 6 GHZ-18 GHZ).....	68
FIG. 71	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH36, 1 GHZ-6 GHZ).....	69
FIG. 72	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH36, 6 GHZ-18 GHZ).....	69
FIG. 73	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 30 MHZ-1 GHZ).....	70
FIG. 74	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 1 GHZ-6 GHZ).....	70
FIG. 75	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 6 GHZ-18 GHZ).....	71
FIG. 76	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 18 GHZ-26.5 GHZ).....	71
FIG. 77	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH40, 26.5 GHZ-40 GHZ).....	72
FIG. 78	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH48, 1 GHZ-6 GHZ).....	72
FIG. 79	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH48, 6 GHZ-18 GHZ).....	73
FIG. 80	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH52, 1 GHZ-6 GHZ).....	73
FIG. 81	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH52, 6 GHZ-18 GHZ).....	74
FIG. 82	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 30 MHZ-1 GHZ).....	75
FIG. 83	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 1 GHZ-6 GHZ).....	75
FIG. 84	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 6 GHZ-18 GHZ).....	76
FIG. 85	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 18 GHZ-26.5 GHZ).....	77
FIG. 86	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH56, 26.5 GHZ-40 GHZ).....	77
FIG. 87	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH64, 1 GHZ-6 GHZ).....	78
FIG. 88	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH64, 6 GHZ-18 GHZ).....	79
FIG. 89	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH100, 1 GHZ-6 GHZ).....	79
FIG. 90	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH100, 6 GHZ-18 GHZ).....	80
FIG. 91	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH116, 30 MHZ-1 GHZ).....	81
FIG. 92	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH116, 1 GHZ-6 GHZ).....	81
FIG. 93	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH116, 6 GHZ-18 GHZ).....	82
FIG. 94	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH116, 18 GHZ-26.5 GHZ).....	83

FIG. 95	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH116, 26.5 GHZ-40 GHZ).....	83
FIG. 96	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH140, 1 GHZ-6 GHZ).....	84
FIG. 97	RADIATED SPURIOUS EMISSION (802.11N-HT20, CH140, 6 GHZ-18 GHZ).....	85
FIG. 98	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH38, 30 MHZ-1 GHZ)	85
FIG. 99	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH38, 1 GHZ-6 GHZ).....	86
FIG. 100	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH38, 6 GHZ-18 GHZ).....	87
FIG. 101	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH38, 18 GHZ-26.5 GHZ).....	87
FIG. 102	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH38, 26.5 GHZ-40 GHZ).....	88
FIG. 103	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH46, 1 GHZ-6 GHZ).....	89
FIG. 104	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH46, 6 GHZ-18 GHZ).....	89
FIG. 105	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH54, 30 MHZ-1 GHZ)	90
FIG. 106	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH54, 1 GHZ-6 GHZ).....	91
FIG. 107	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH54, 6 GHZ-18 GHZ).....	91
FIG. 108	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH54, 18 GHZ-26.5 GHZ).....	92
FIG. 109	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH54, 26.5 GHZ-40 GHZ).....	93
FIG. 110	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH62, 1 GHZ-6 GHZ).....	93
FIG. 111	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH62, 6 GHZ-18 GHZ).....	94
FIG. 112	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH102, 1 GHZ-6 GHZ).....	95
FIG. 113	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH102, 6 GHZ-18 GHZ).....	95
FIG. 114	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH110, 30 MHZ-1 GHZ).....	96
FIG. 115	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH110, 1 GHZ-6 GHZ).....	96
FIG. 116	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH110, 6 GHZ-18 GHZ).....	97
FIG. 117	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH110, 18 GHZ-26.5 GHZ).....	98
FIG. 118	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH110, 26.5 GHZ-40 GHZ).....	98
FIG. 119	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH134, 1 GHZ-6 GHZ).....	99
FIG. 120	RADIATED SPURIOUS EMISSION (802.11N-HT40, CH134, 6 GHZ-18 GHZ).....	100
A.7.	SPURIOUS EMISSIONS RADIATED < 30MHZ	101
FIG. 121	RADIATED SPURIOUS EMISSION (802.11A, CH40, 9 KHZ ~30 MHZ).....	101
A.8.	CONDUCTED EMISSION (150KHZ- 30MHZ).....	102
FIG. 122	CONDUCTED EMISSION(802.11A, CH40, TX).....	103
FIG. 123	CONDUCTED EMISSION(802.11A, IDLE).....	104
A.9.	PEAK EXCURSION.....	105
FIG. 124	PEAK EXCURSIONS (802.11A, CH36, PEAK)	107
FIG. 125	PEAK EXCURSIONS (802.11A, CH40, PEAK)	107
FIG. 126	PEAK EXCURSIONS (802.11A, CH48, PEAK)	108
FIG. 127	PEAK EXCURSIONS (802.11A, CH36, AVERAGE)	108
FIG. 128	PEAK EXCURSIONS (802.11A, CH40, AVERAGE)	109
FIG. 129	PEAK EXCURSIONS (802.11A, CH48, AVERAGE)	109
FIG. 130	PEAK EXCURSIONS (802.11A, CH52, PEAK)	110
FIG. 131	PEAK EXCURSIONS (802.11A, CH56, PEAK)	110
FIG. 132	PEAK EXCURSIONS (802.11A, CH64, PEAK)	111
FIG. 133	PEAK EXCURSIONS (802.11A, CH52, AVERAGE)	111
FIG. 134	PEAK EXCURSIONS (802.11A, CH56, AVERAGE)	112
FIG. 135	PEAK EXCURSIONS (802.11A, CH64, AVERAGE)	112

FIG. 136	PEAK EXCURSIONS (802.11A, CH100, PEAK)	113
FIG. 137	PEAK EXCURSIONS (802.11A, CH120, PEAK)	113
FIG. 138	PEAK EXCURSIONS (802.11A, CH140, PEAK)	114
FIG. 139	PEAK EXCURSIONS (802.11A, CH100, AVERAGE)	114
FIG. 140	PEAK EXCURSIONS (802.11A, CH120, AVERAGE)	115
FIG. 141	PEAK EXCURSIONS (802.11A, CH140, AVERAGE)	115
FIG. 142	PEAK EXCURSIONS (802.11N-HT20, CH36, PEAK).....	116
FIG. 143	PEAK EXCURSIONS (802.11N-HT20, CH40, PEAK).....	116
FIG. 144	PEAK EXCURSIONS (802.11N-HT20, CH48, PEAK).....	117
FIG. 145	PEAK EXCURSIONS (802.11N-HT20, CH36, AVERAGE).....	117
FIG. 146	PEAK EXCURSIONS (802.11N-HT20, CH40, AVERAGE).....	118
FIG. 147	PEAK EXCURSIONS (802.11N-HT20, CH48, AVERAGE).....	118
FIG. 148	PEAK EXCURSIONS (802.11N-HT20, CH52, PEAK).....	119
FIG. 149	PEAK EXCURSIONS (802.11N-HT20, CH56, PEAK).....	119
FIG. 150	PEAK EXCURSIONS (802.11N-HT20, CH64, PEAK).....	120
FIG. 151	PEAK EXCURSIONS (802.11N-HT20, CH52, AVERAGE).....	120
FIG. 152	PEAK EXCURSIONS (802.11N-HT20, CH56, AVERAGE).....	121
FIG. 153	PEAK EXCURSIONS (802.11N-HT20, CH64, AVERAGE).....	121
FIG. 154	PEAK EXCURSIONS (802.11N-HT20, CH100, PEAK).....	122
FIG. 155	PEAK EXCURSIONS (802.11N-HT20, CH120, PEAK).....	122
FIG. 156	PEAK EXCURSIONS (802.11N-HT20, CH140, PEAK).....	123
FIG. 157	PEAK EXCURSIONS (802.11N-HT20, CH100, AVERAGE).....	123
FIG. 158	PEAK EXCURSIONS (802.11N-HT20, CH120, AVERAGE).....	124
FIG. 159	PEAK EXCURSIONS (802.11N-HT20, CH140, AVERAGE).....	124
FIG. 160	PEAK EXCURSIONS (802.11N-HT40, CH38, PEAK).....	125
FIG. 161	PEAK EXCURSIONS (802.11N-HT40, CH46, PEAK).....	125
FIG. 162	PEAK EXCURSIONS (802.11N-HT40, CH54, PEAK).....	126
FIG. 163	PEAK EXCURSIONS (802.11N-HT40, CH62, PEAK).....	126
FIG. 164	PEAK EXCURSIONS (802.11N-HT40, CH38, AVERAGE).....	127
FIG. 165	PEAK EXCURSIONS (802.11N-HT40, CH46, AVERAGE).....	127
FIG. 166	PEAK EXCURSIONS (802.11N-HT40, CH54, AVERAGE).....	128
FIG. 167	PEAK EXCURSIONS (802.11N-HT40, CH62, AVERAGE).....	128
FIG. 168	PEAK EXCURSIONS (802.11N-HT40, CH102, PEAK).....	129
FIG. 169	PEAK EXCURSIONS (802.11N-HT40, CH118, PEAK).....	129
FIG. 170	PEAK EXCURSIONS (802.11N-HT40, CH134, PEAK).....	130
FIG. 171	PEAK EXCURSIONS (802.11N-HT40, CH102, AVERAGE).....	130
FIG. 172	PEAK EXCURSIONS (802.11N-HT40, CH118, AVERAGE).....	131
FIG. 173	PEAK EXCURSIONS (802.11N-HT40, CH134, AVERAGE).....	131
A.10.	FREQUENCY STABILITY	132
A.11.	POWER CONTROL	132
ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP.....		133

1. TEST LATORATORY

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52 Hua Yuanbei Road, Haidian District, Beijing, P.R.China
Postal Code: 100191
Telephone: 008610623046332561
Fax: 008610623046332504


1.2. Project data

Testing Start Date: 2014-07-13
Testing End Date: 2014-09-18

1.3. Signature



Xu Zhongfei
(Prepared this test report)



Jiang Afang
(Reviewed this test report)



Xiao Li
Deputy Director of the laboratory
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
Contact Person: Gong Zhizhou
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
Contact Person: Gong Zhizhou
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY

EQUIPMENT(AE)

3.1. About EUT

Description	Wi-Fi dual-band tablet
Model name	D819
FCC ID	RAD494
IC ID	9238A-0033
WLAN Frequency Range	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
MAX Conducted Power	15.10 dBm(OFDM)
Extreme Temperature	-20/+55°C
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	PIO	vJ58
EUT2	/	PIO	vJ58

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Dummy battery	/	/
AE2	Battery	CAC4060002C2	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Wi-Fi dual-band tablet with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2014
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
UNII: KDB 789033 D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E	v01

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Band edge compliance	15.247	/	P
Transmitter spurious emissions radiated	15.407	/	P
Spurious emissions radiated < 30 MHz	15.407	/	P
Spurious emissions conducted < 30 MHz	15.407	/	P
Peak Excursion	15.407	/	P
Frequency Stability	15.407	/	NA
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

TMC has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2014-07-08	2015-07-07
2	Test Receiver	ESS	847151/015	Rohde & Schwarz	2013-11-29	2014-11-28
3	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-4-15	2015-4-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system


No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2013-11-6	2014-11-5
2	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	2011-11-11	2014-11-10
3	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS-Lindgren	2014-4-20	2017-4-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2012-7-1	2015-06-30
5	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2011-12-21	2014-12-20
6	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

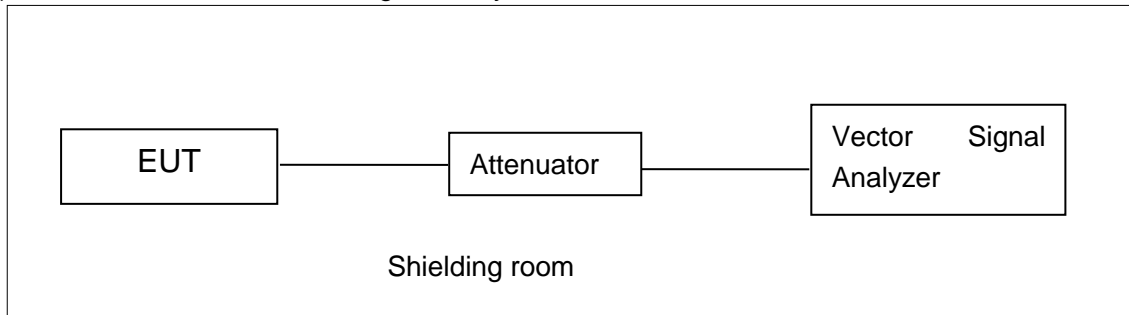


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

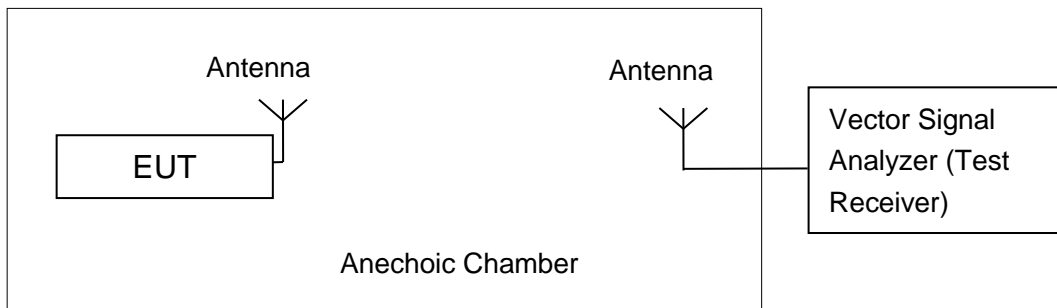

The measurement is made according to KDB 789033 D02

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-1 is made according to KDB 789033 D02

Measurement Results:

802.11a mode

Mode	Channel	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz (Ch36)	14.97	14.37	14.82	14.00	13.81	12.69	12.79	12.17
	5200MHz (Ch40)	14.73	/	/	/	/	/	/	/
	5240MHz(Ch48)	14.54	/	/	/	/	/	/	/
	5260MHz(Ch52)	14.70	/	/	/	/	/	/	/
	5280MHz(Ch56)	14.71	/	/	/	/	/	/	/
	5320MHz(Ch64)	14.46	/	/	/	/	/	/	/
	5500MHz(Ch100)	14.30	/	/	/	/	/	/	/
	5580MHz(Ch116)	14.98	/	/	/	/	/	/	/
	5700MHz(Ch140)	14.83	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz (Ch36)	15.10	14.13	14.03	13.32	12.66	12.34	12.17	12.01
	5200MHz (Ch40)	14.89	/	/	/	/	/	/	/
	5240MHz(Ch48)	14.46	/	/	/	/	/	/	/
	5260MHz(Ch52)	14.65	/	/	/	/	/	/	/
	5280MHz(Ch56)	14.66	/	/	/	/	/	/	/
	5320MHz(Ch64)	14.13	/	/	/	/	/	/	/
	5500MHz(Ch100)	14.42	/	/	/	/	/	/	/
	5580MHz(Ch116)	14.91	/	/	/	/	/	/	/
	5700MHz(Ch140)	14.76	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Channel	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz (Ch38)	14.29	13.06	13.06	12.07	11.94	10.88	11.18	11.08
	5230MHz(Ch46)	14.52	/	/	/	/	/	/	/
	5270MHz(Ch54)	14.12	/	/	/	/	/	/	/
	5310MHz(Ch62)	14.01	/	/	/	/	/	/	/
	5510MHz(Ch102)	14.27	/	/	/	/	/	/	/
	5550MHz(Ch110)	14.27	/	/	/	/	/	/	/
	5670MHz(Ch134)	14.30	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method SA-1 is made according to KDB 789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	6.89	P
	5200 MHz	6.60	P
	5240 MHz	6.83	P
	5260 MHz	6.24	P
	5280 MHz	6.23	P
	5320 MHz	6.17	P
	5500 MHz	6.93	P
	5580 MHz	6.77	P
802.11n HT20	5180 MHz	6.80	P
	5200 MHz	6.86	P
	5240 MHz	6.86	P
	5260 MHz	6.44	P
	5280 MHz	6.30	P
	5320 MHz	6.21	P
	5500 MHz	7.01	P
	5580 MHz	6.98	P
802.11n HT40	5190 MHz	3.34	P
	5230 MHz	3.46	P
	5270 MHz	2.78	P
	5310 MHz	2.69	P
	5510 MHz	3.32	P
	5550 MHz	3.00	P
	5670 MHz	3.23	P

Conclusion: PASS

A.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033 D02

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 26dB Bandwidth (kHz)		conclusion
		Fig.	Value	
802.11a	5180 MHz	Fig.1	25200	P
	5200 MHz	Fig.2	24200	P
	5240 MHz	Fig.3	25600	P
	5260 MHz	Fig.4	24300	P
	5280 MHz	Fig.5	23900	P
	5320 MHz	Fig.6	26150	P
	5500 MHz	Fig.7	31750	P
	5580 MHz	Fig.8	29700	P
802.11n HT20	5700 MHz	Fig.9	27750	P
	5180 MHz	Fig.10	26050	P
	5200 MHz	Fig.11	26600	P
	5240 MHz	Fig.12	31750	P
	5260 MHz	Fig.13	26900	P
	5280 MHz	Fig.14	25300	P
	5320 MHz	Fig.15	29150	P
	5500 MHz	Fig.16	27800	P
802.11n HT40	5580 MHz	Fig.17	29700	P
	5700 MHz	Fig.18	29000	P
	5190 MHz	Fig.19	55760	P
	5230 MHz	Fig.20	47360	P
	5270 MHz	Fig.21	64000	P
	5310 MHz	Fig.22	53360	P
	5510 MHz	Fig.23	62280	P
5550 MHz	Fig.24	65360	P	
5670 MHz	Fig.25	67360	P	

Conclusion: PASS

Test graphs as below:

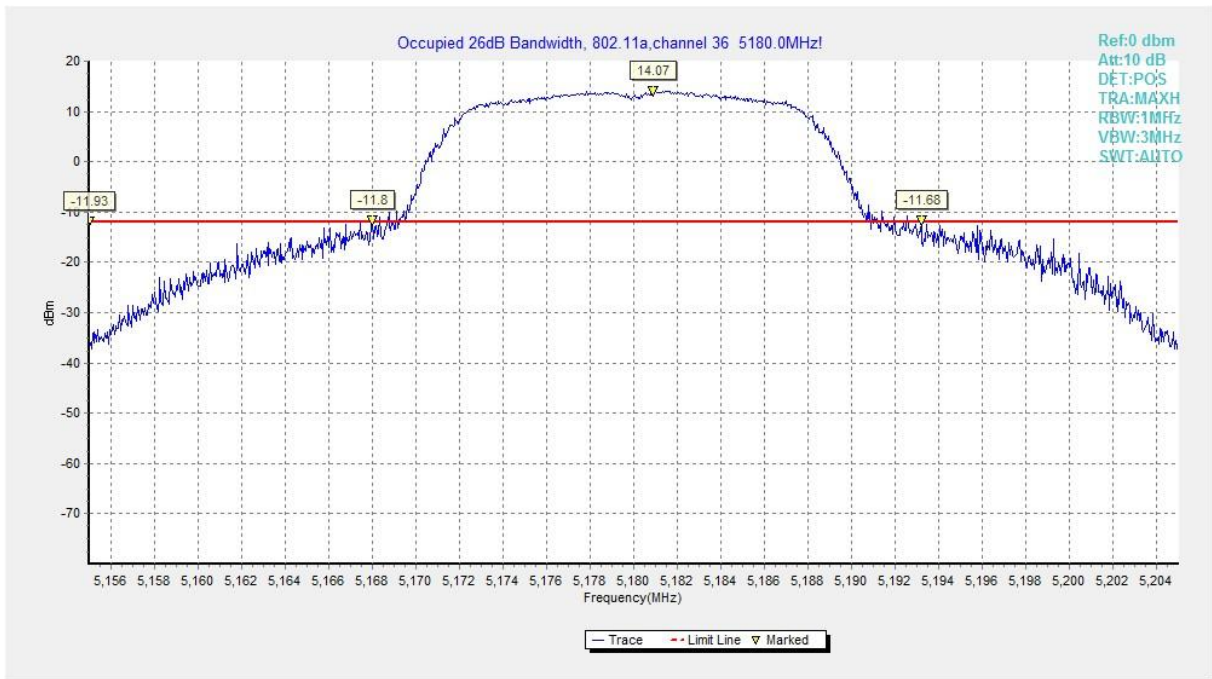


Fig. 1 Occupied 26dB Bandwidth (802.11a, 5180MHz)

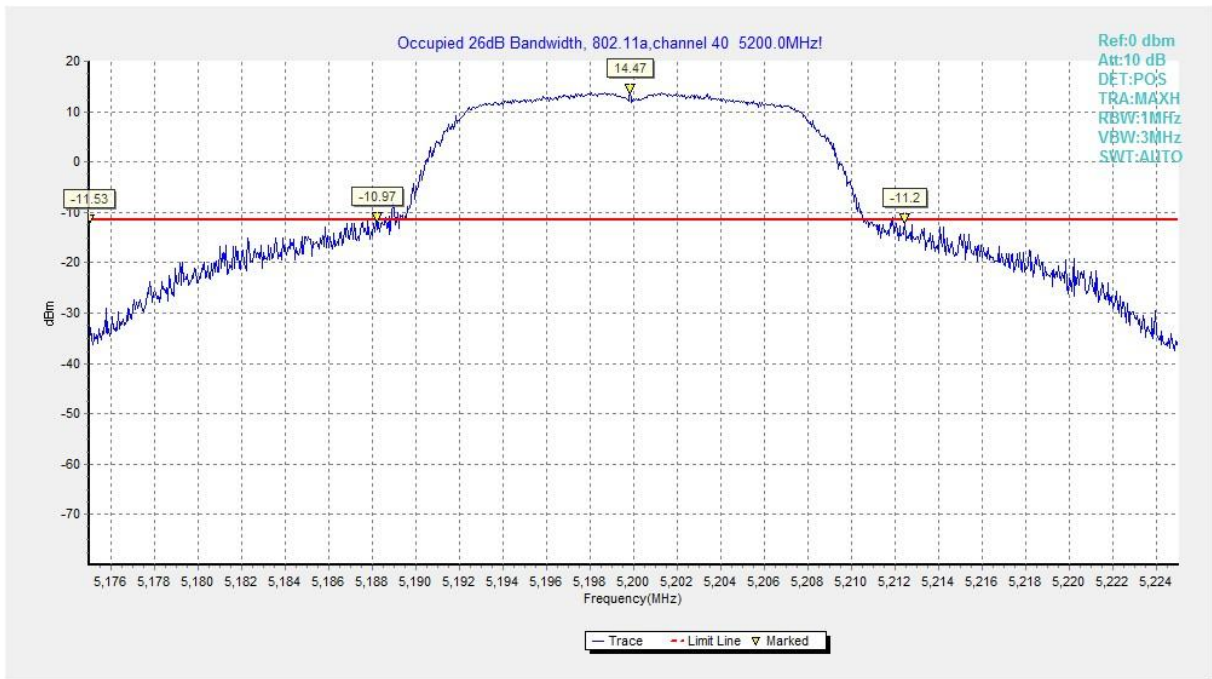


Fig. 2 Occupied 26dB Bandwidth (802.11a, 5200MHz)

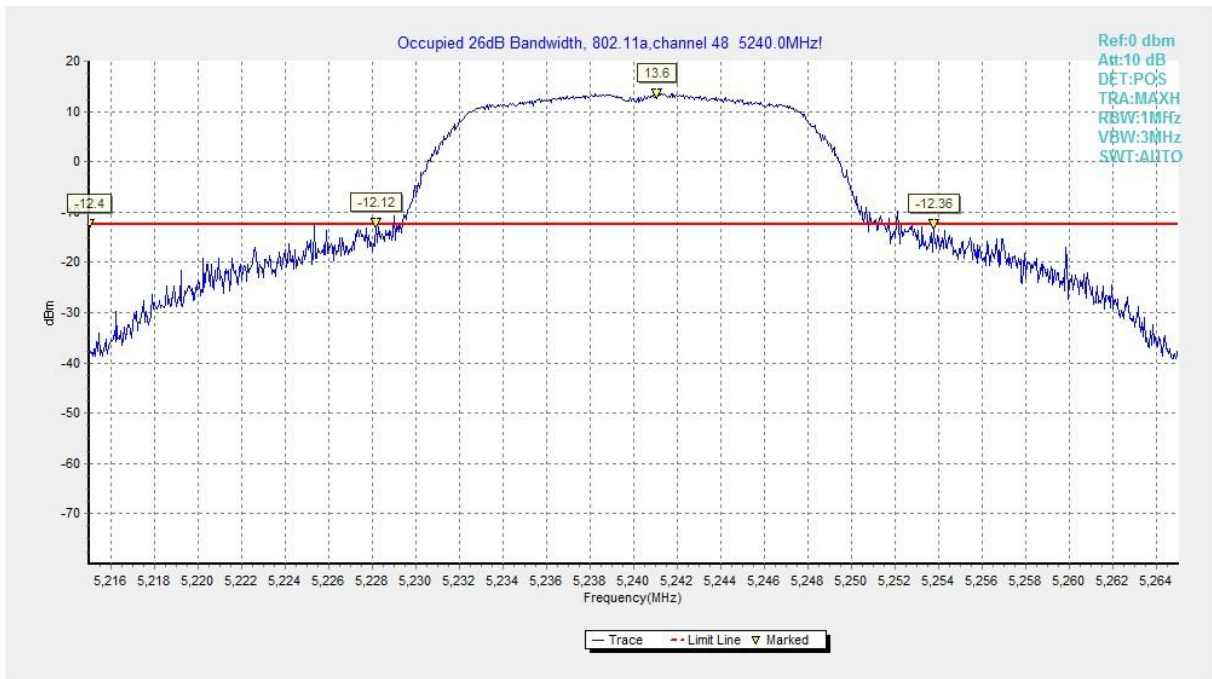


Fig. 3 Occupied 26dB Bandwidth (802.11a, 5240MHz)

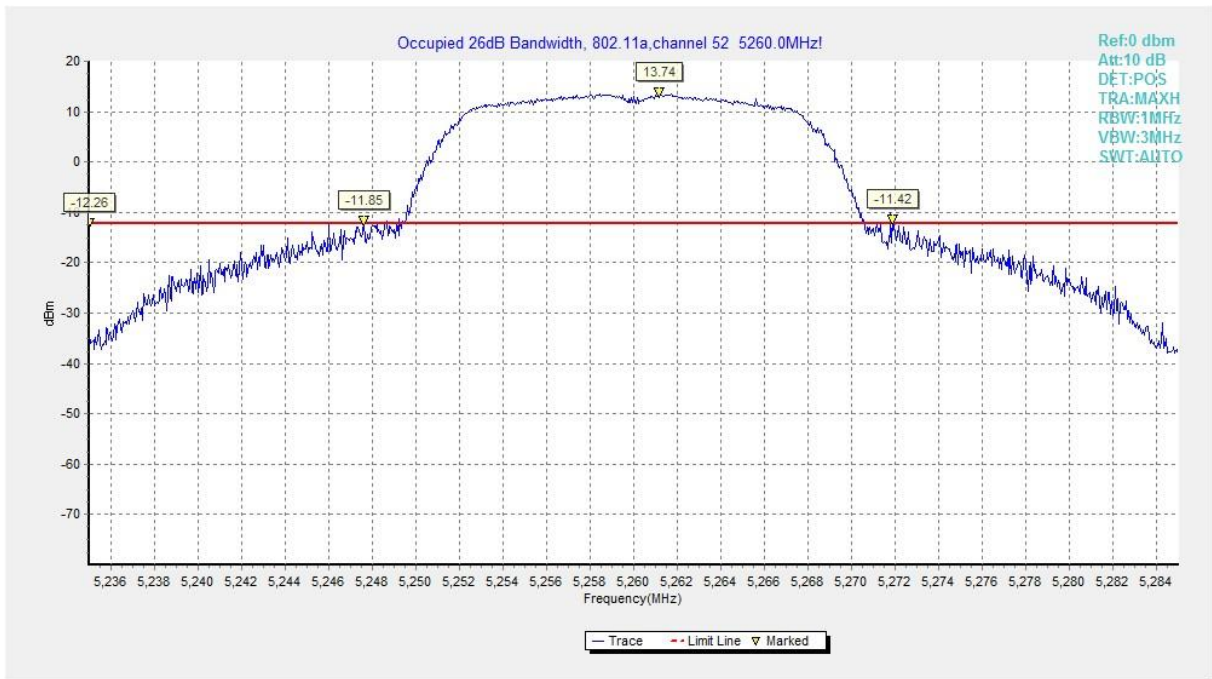


Fig. 4 Occupied 26dB Bandwidth (802.11a, 5260MHz)

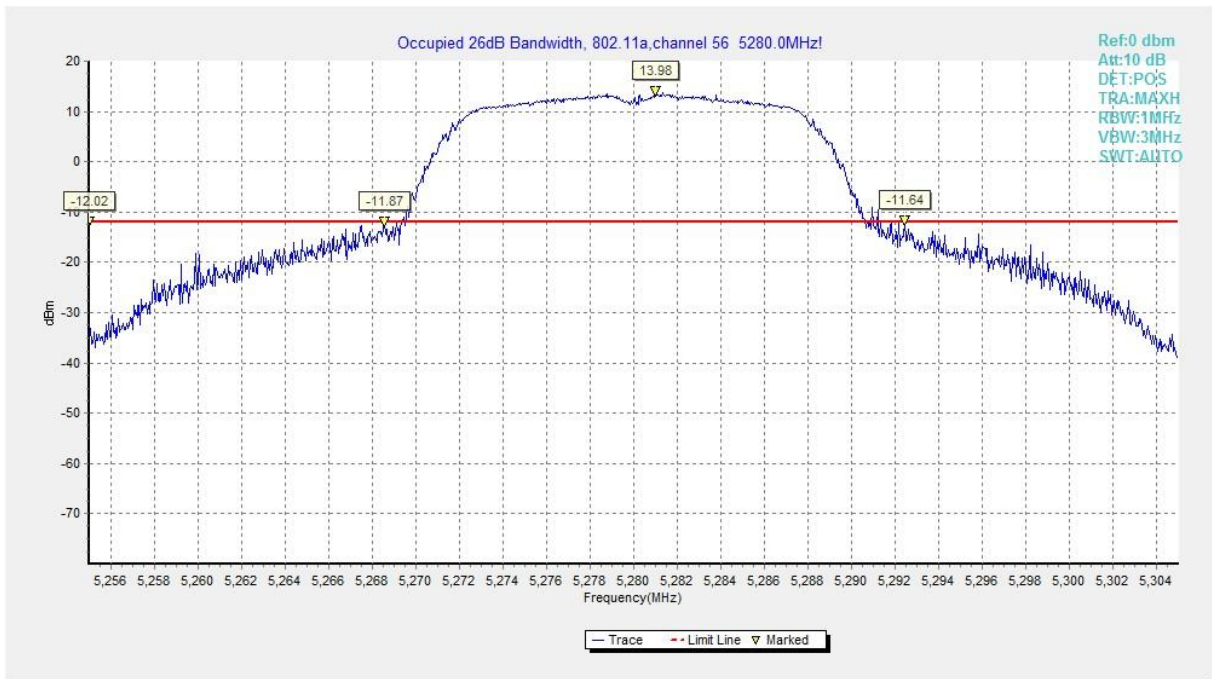


Fig. 5 Occupied 26dB Bandwidth (802.11a, 5280MHz)

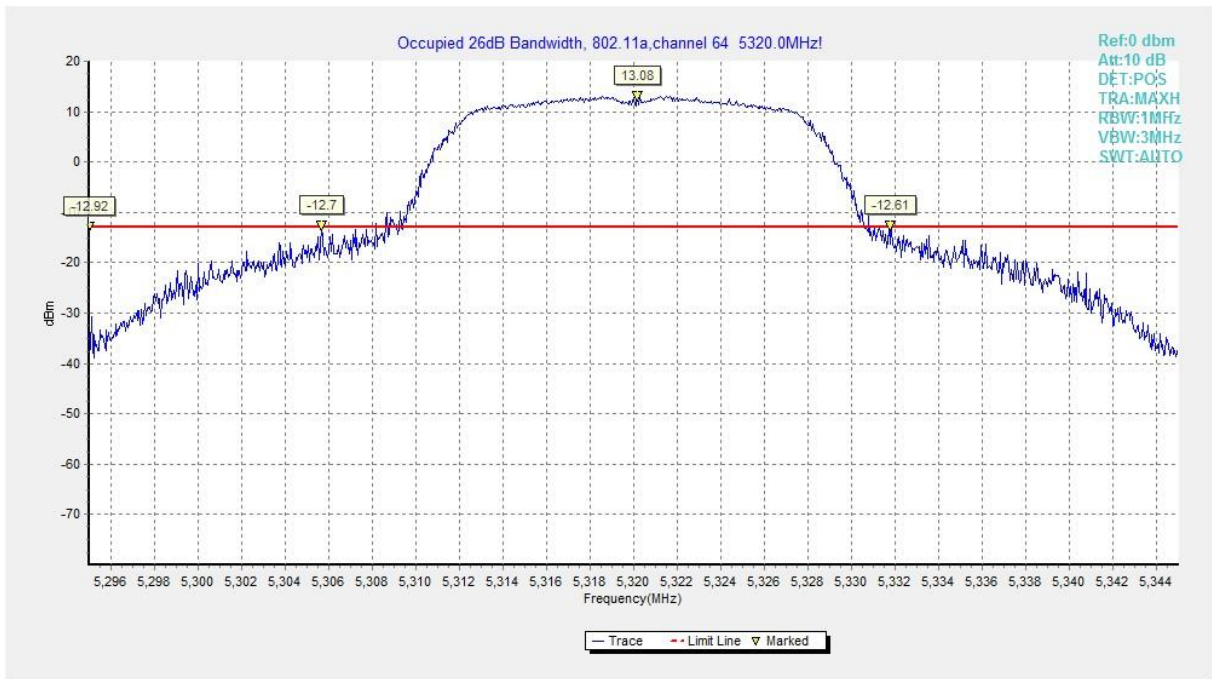


Fig. 6 Occupied 26dB Bandwidth (802.11a, 5320MHz)

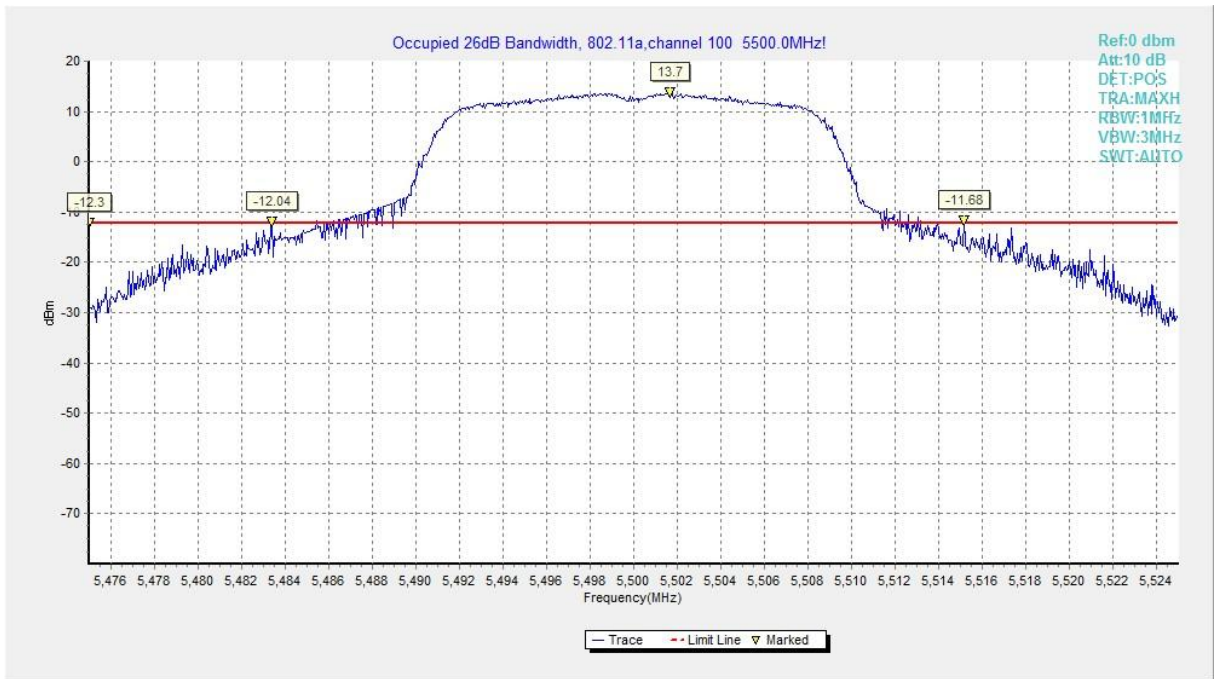


Fig. 7 Occupied 26dB Bandwidth (802.11a, 5500MHz)

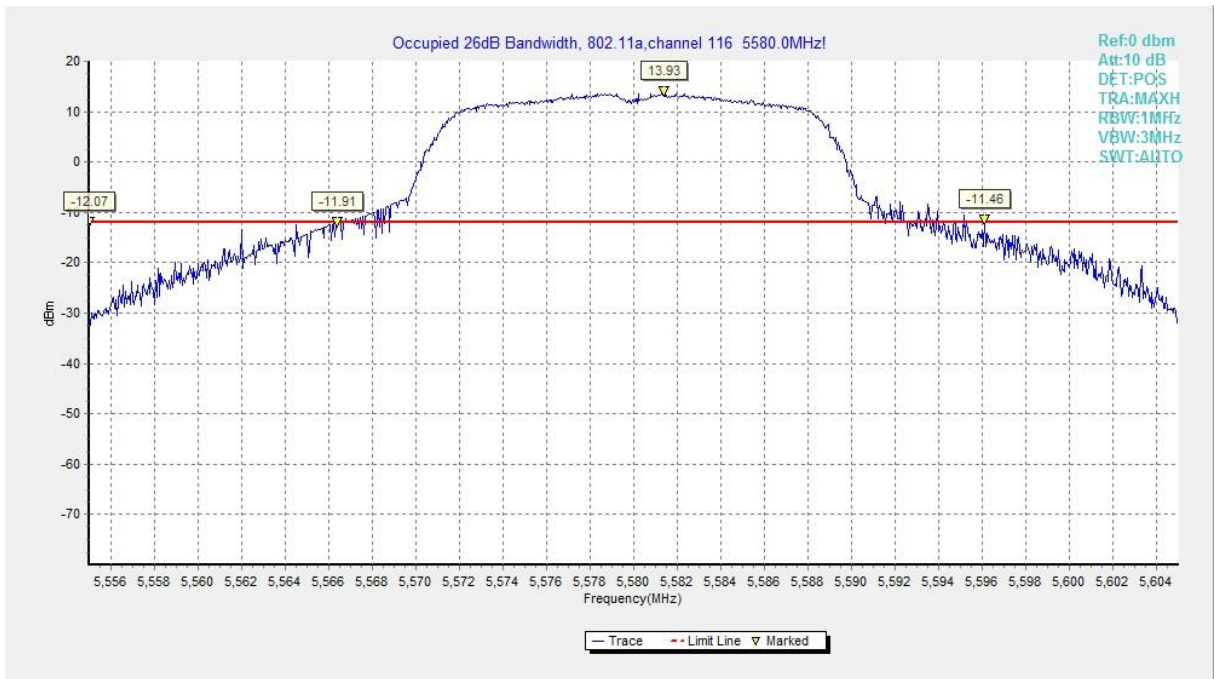


Fig. 8 Occupied 26dB Bandwidth (802.11a, 5600MHz)

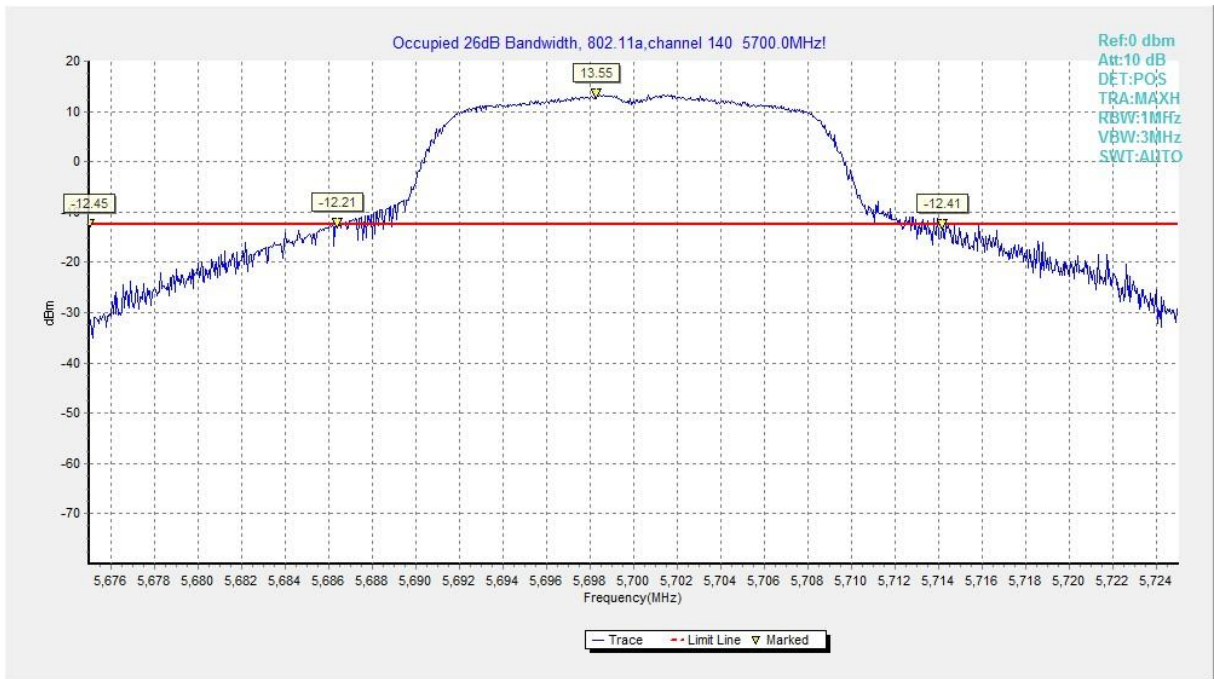


Fig. 9 Occupied 26dB Bandwidth (802.11a, 5700MHz)

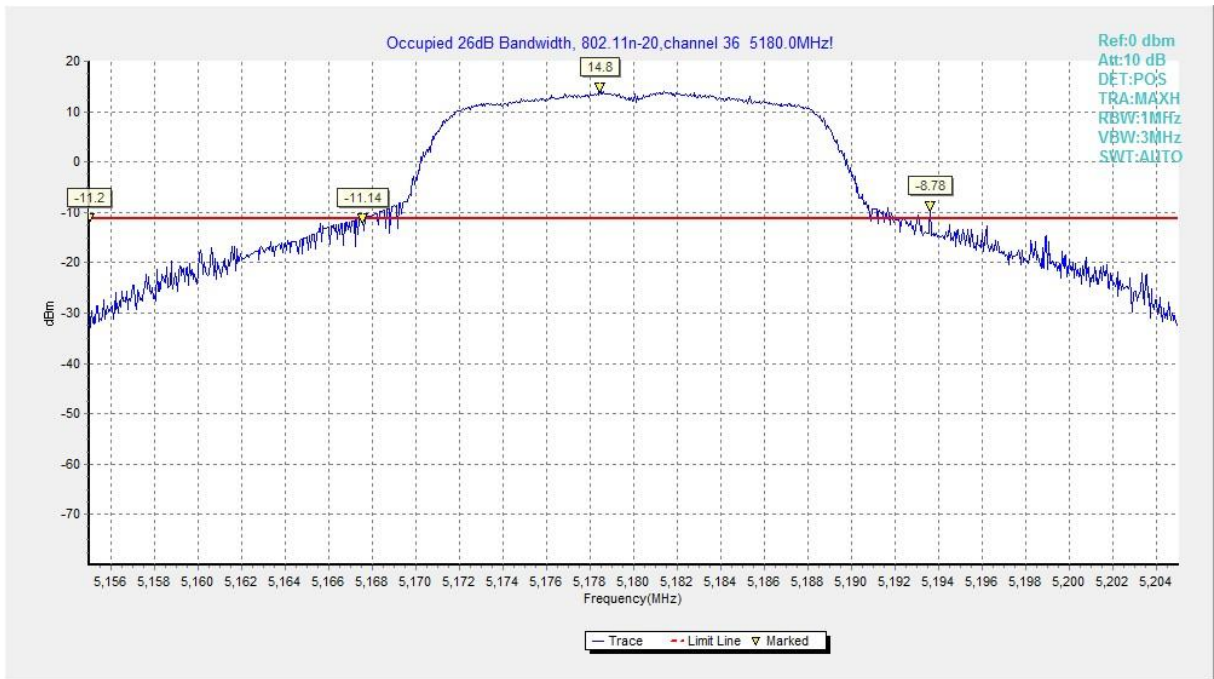


Fig. 10 Occupied 26dB Bandwidth (802.11n-HT20, 5180MHz)

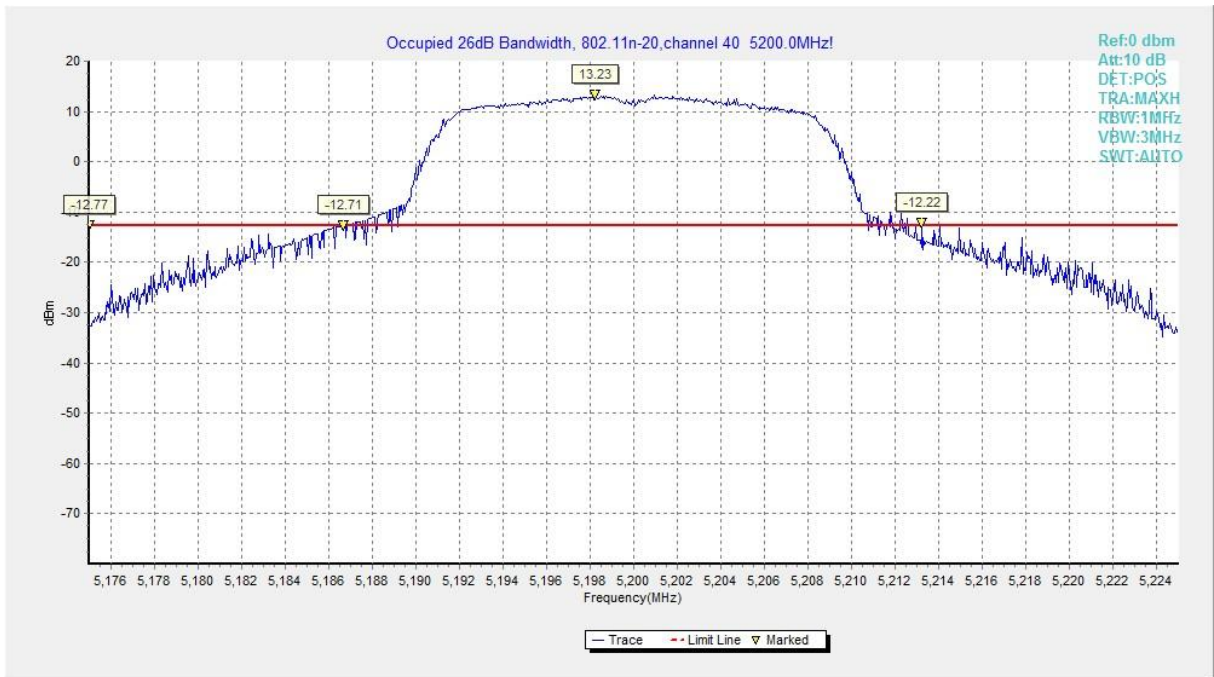


Fig. 11 Occupied 26dB Bandwidth (802.11n-HT20, 5200MHz)

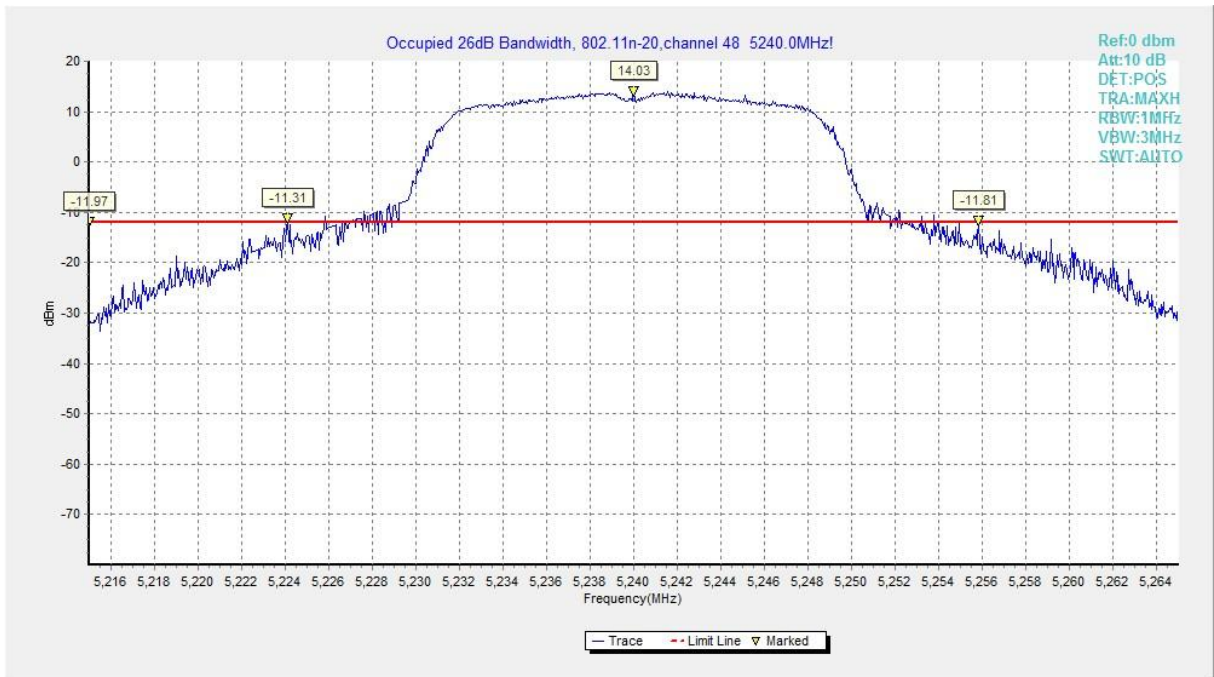


Fig. 12 Occupied 26dB Bandwidth (802.11n-HT20, 5240MHz)

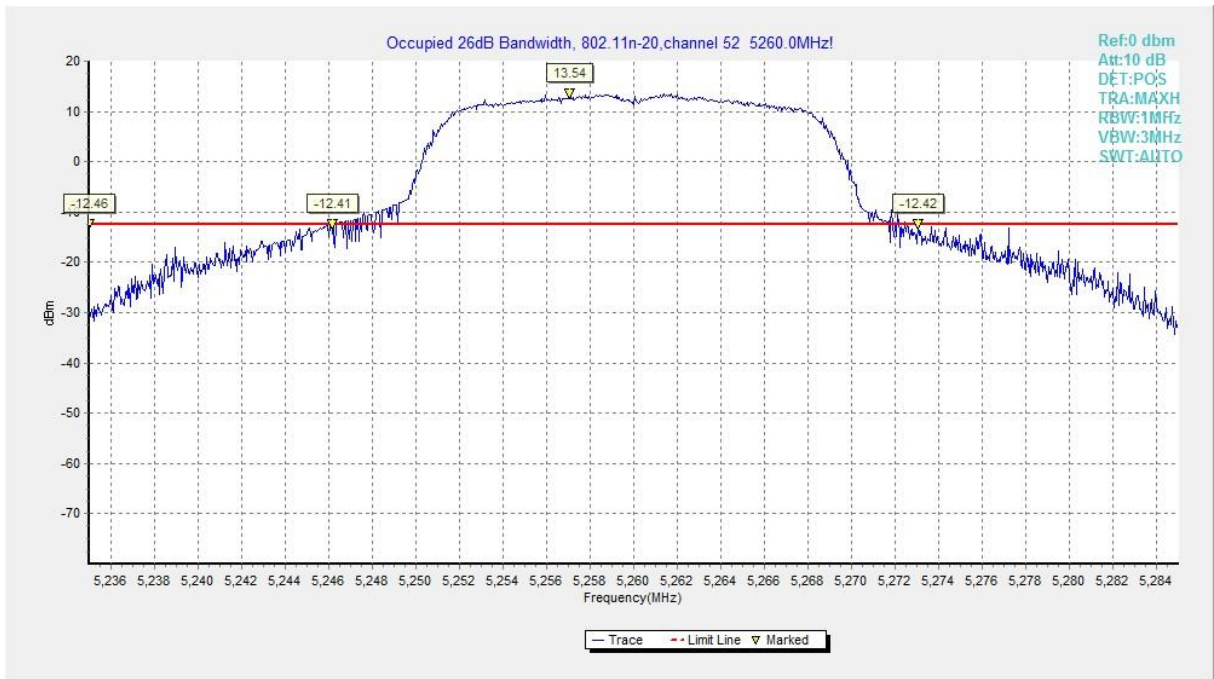


Fig. 13 Occupied 26dB Bandwidth (802.11n-HT20, 5260MHz)

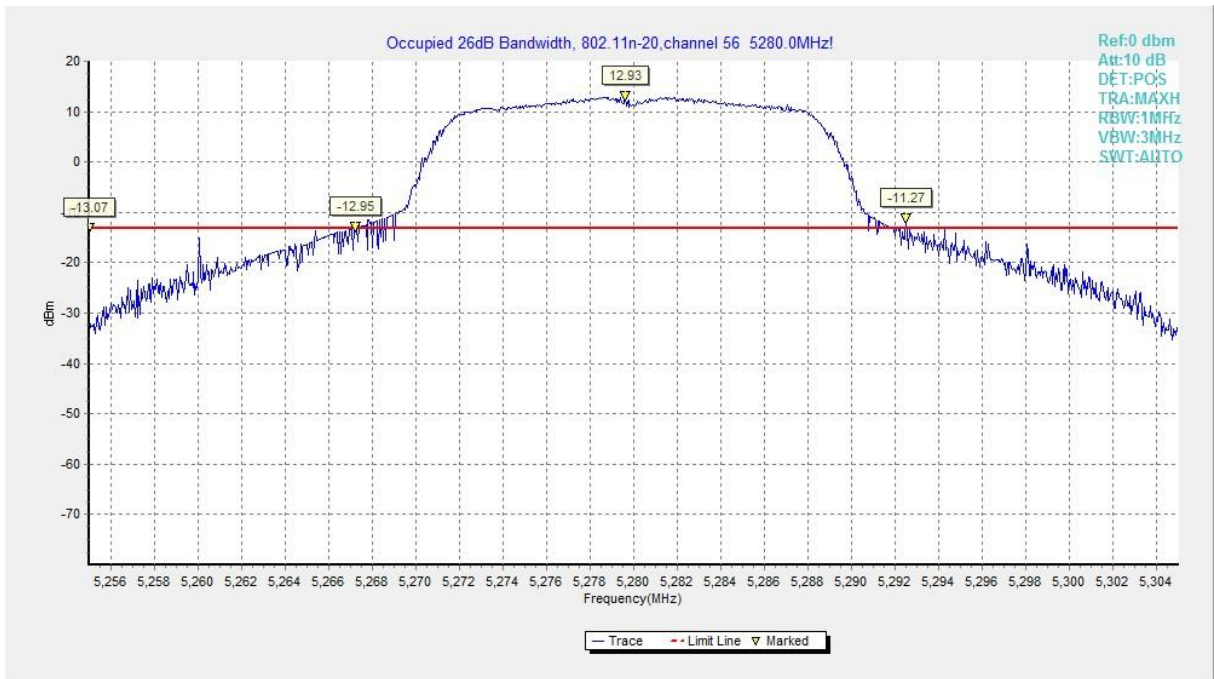


Fig. 14 Occupied 26dB Bandwidth (802.11n-HT20, 5280MHz)

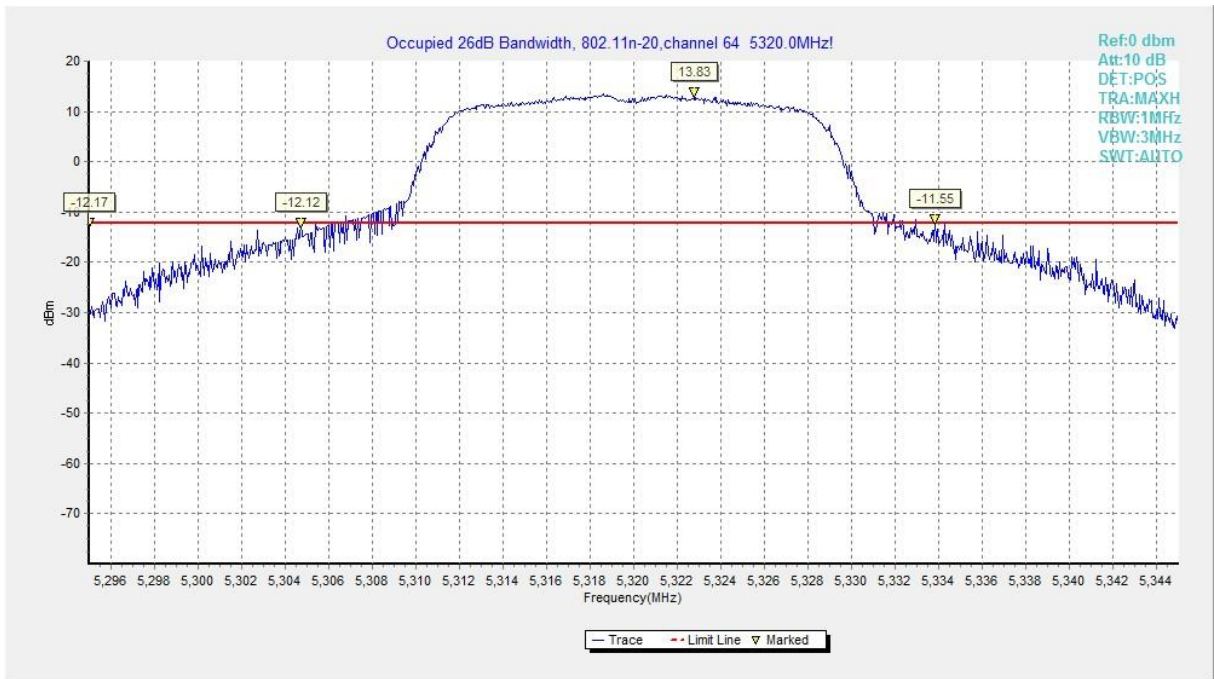


Fig. 15 Occupied 26dB Bandwidth (802.11n-HT20, 5320MHz)

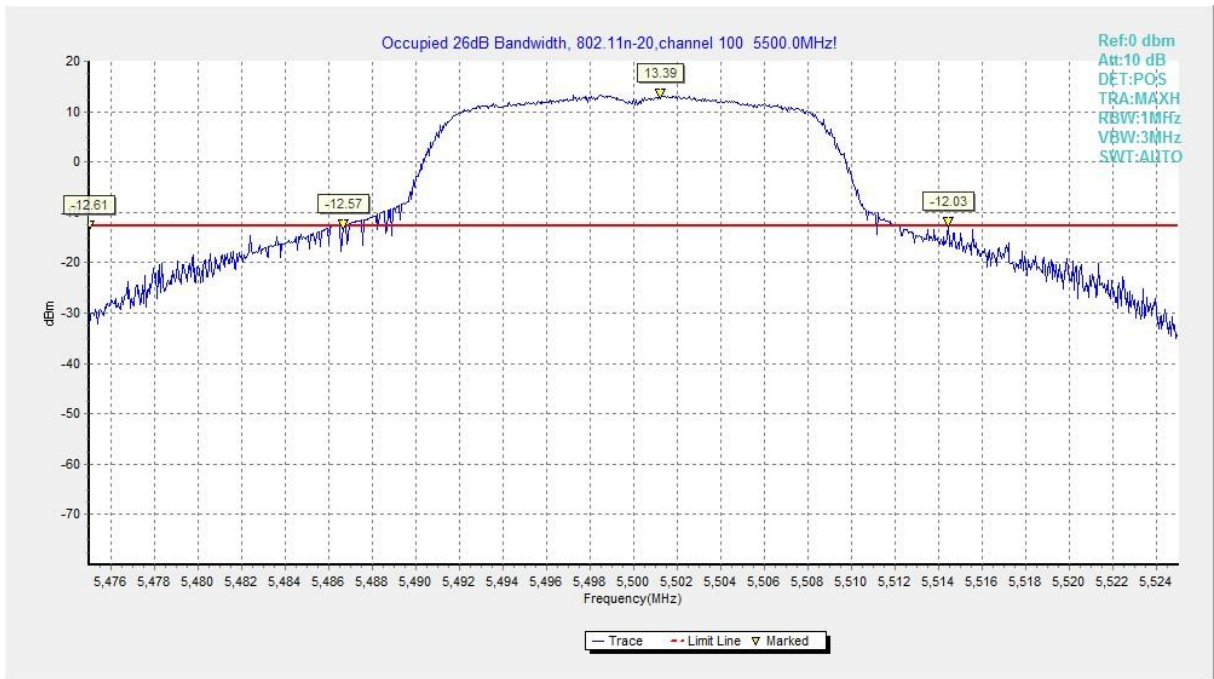


Fig. 16 Occupied 26dB Bandwidth (802.11n-HT20, 5500MHz)

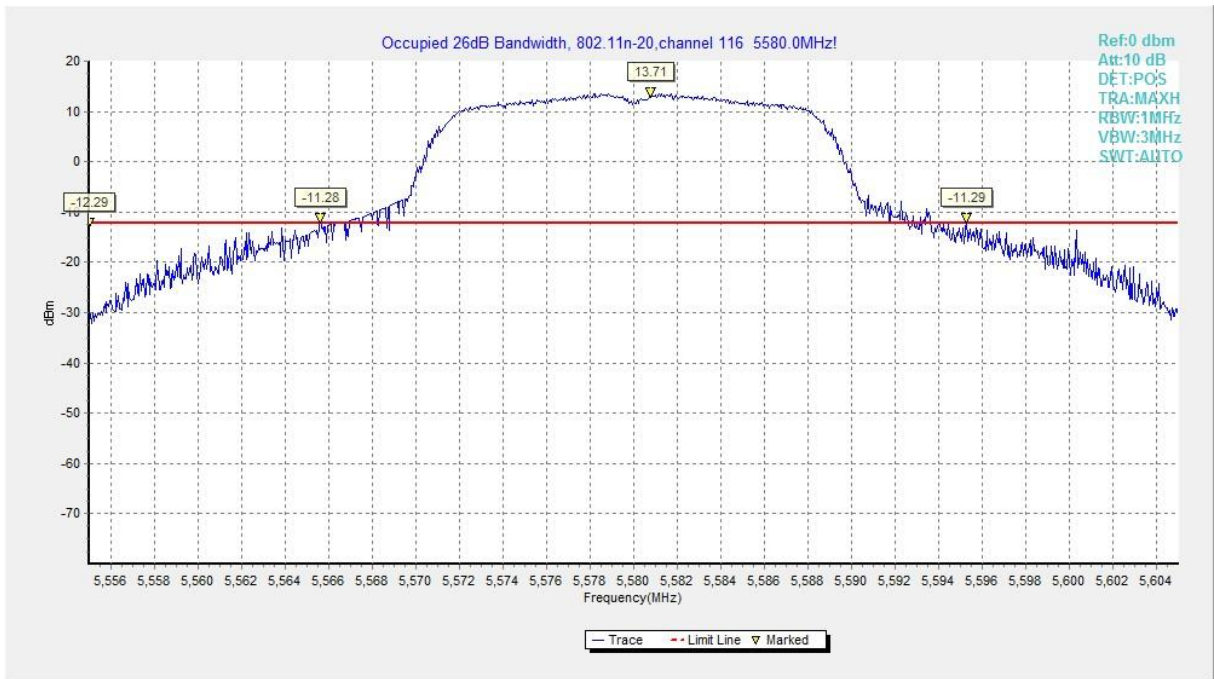


Fig. 17 Occupied 26dB Bandwidth (802. 11n-HT20, 5600MHz)

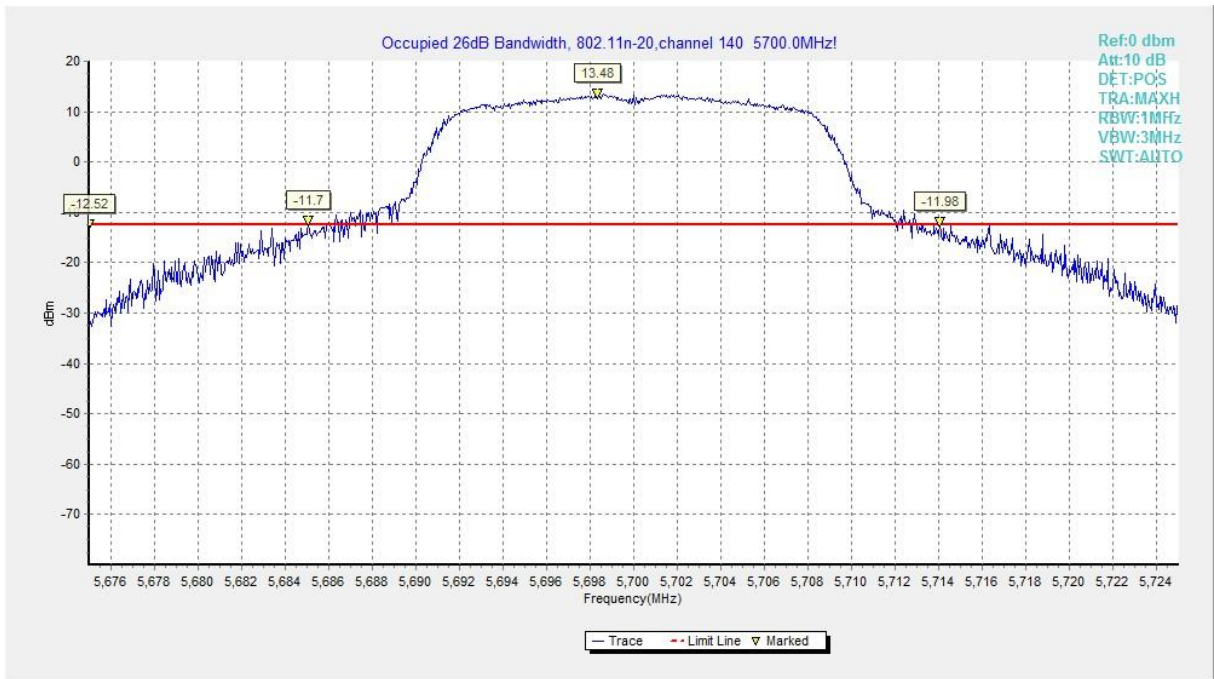


Fig. 18 Occupied 26dB Bandwidth (802. 11n-HT20, 5700MHz)

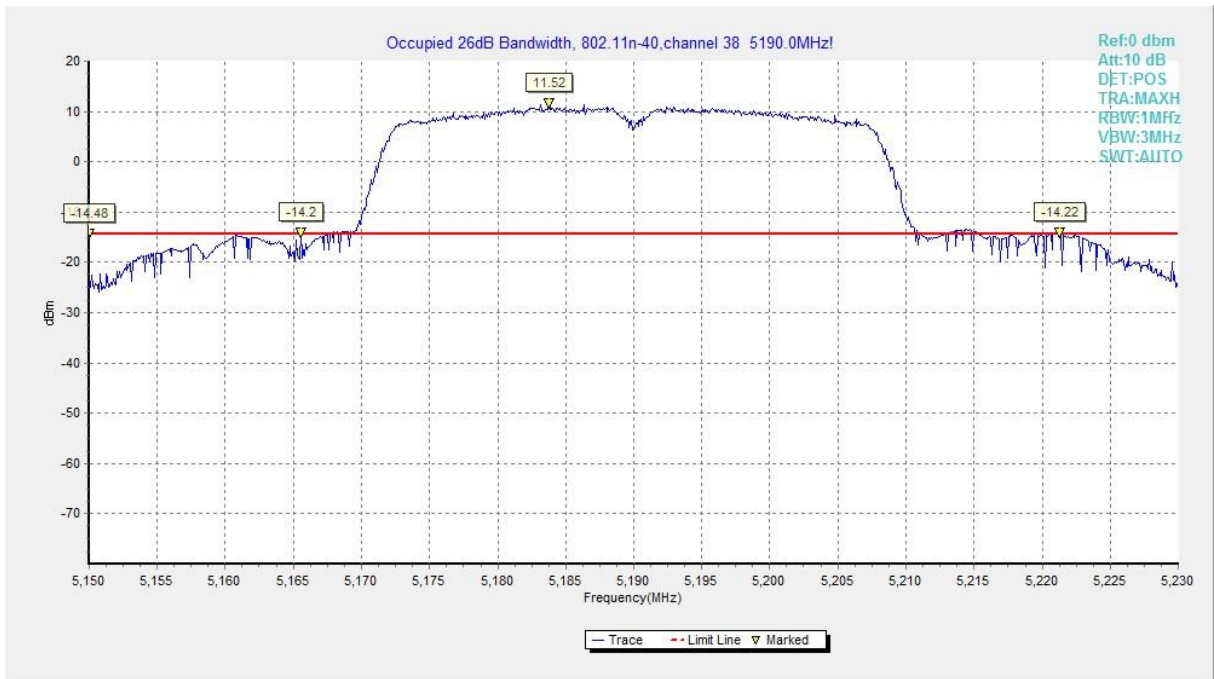


Fig. 19 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)

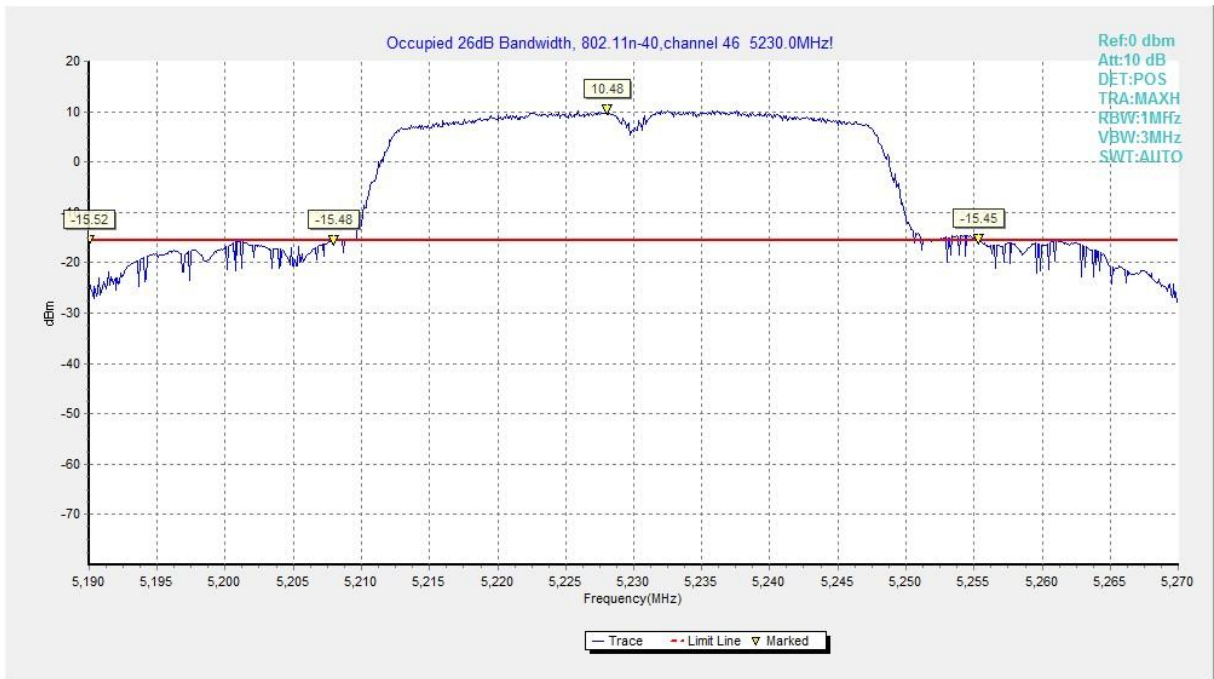


Fig. 20 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)

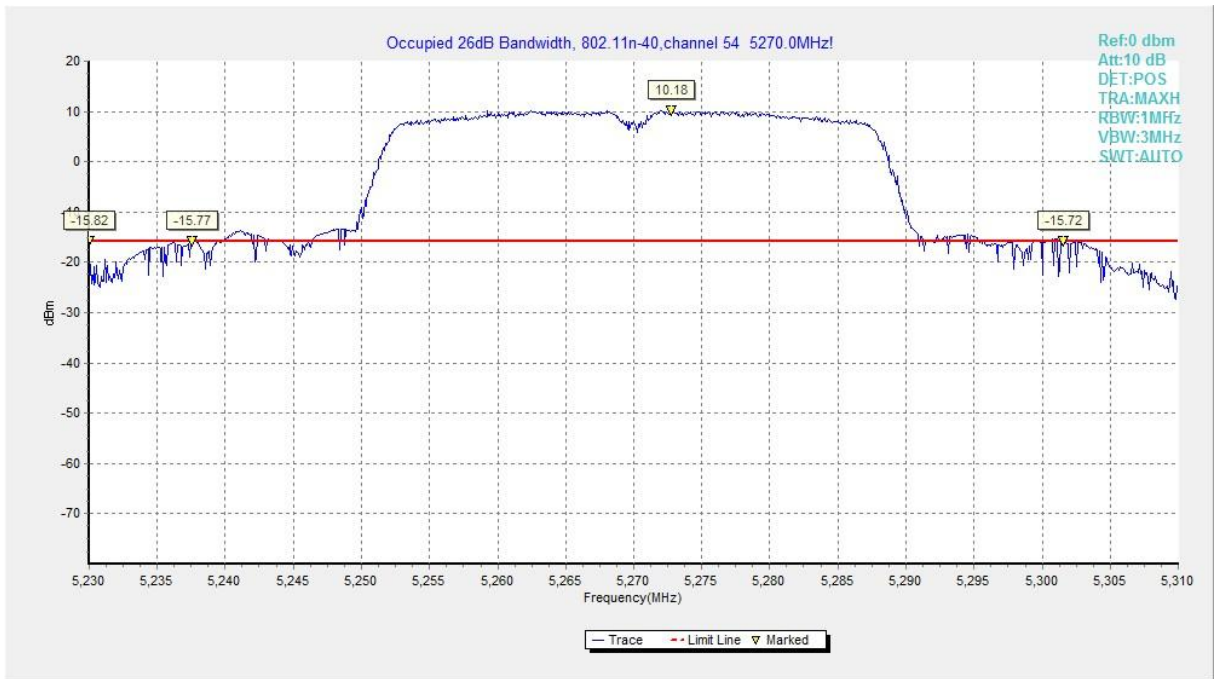


Fig. 21 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)

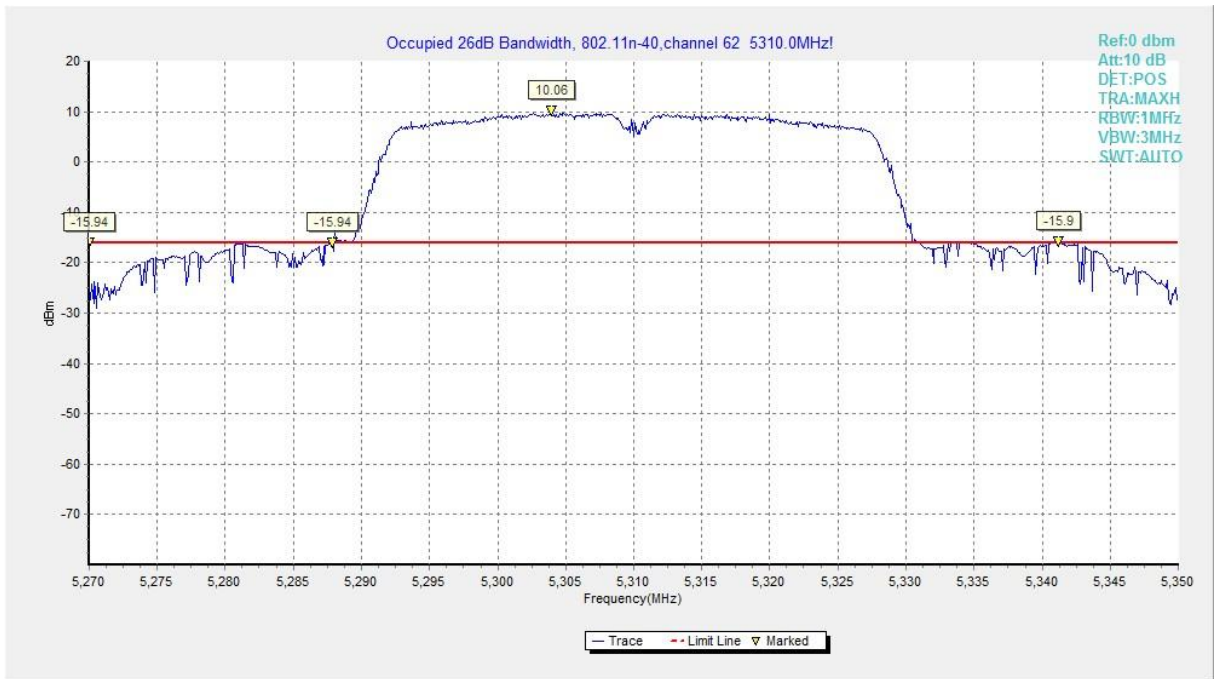


Fig. 22 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)

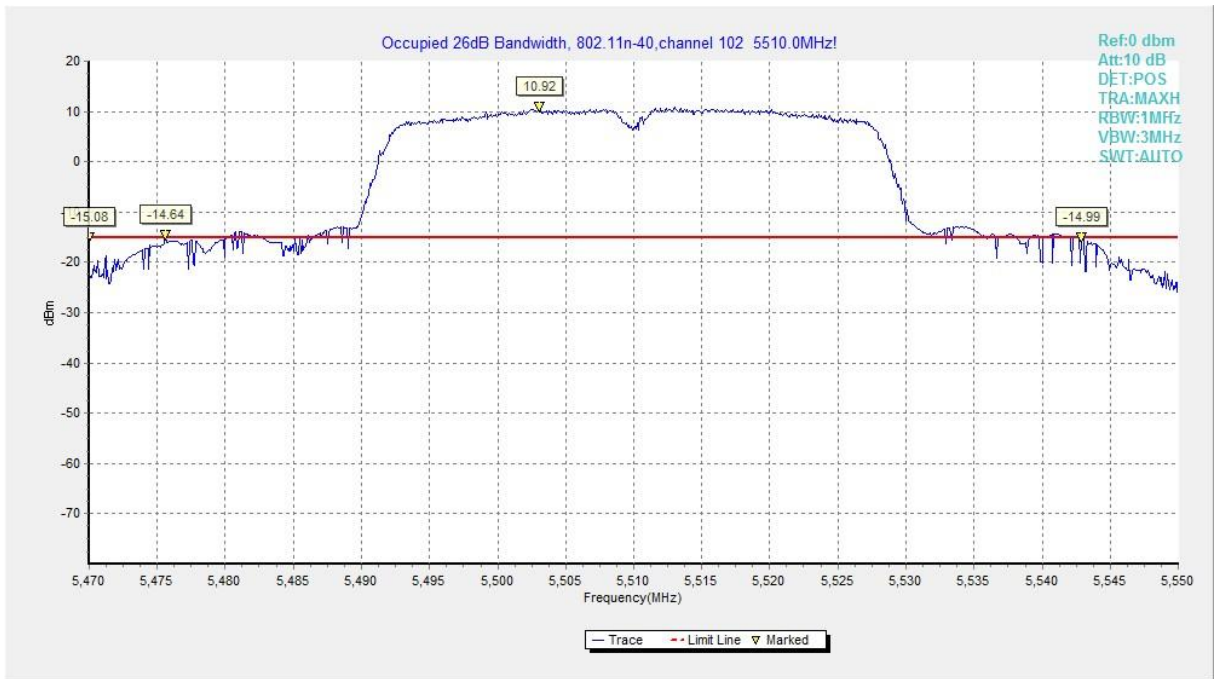


Fig. 23 Occupied 26dB Bandwidth (802. 11n-HT40, 5510MHz)

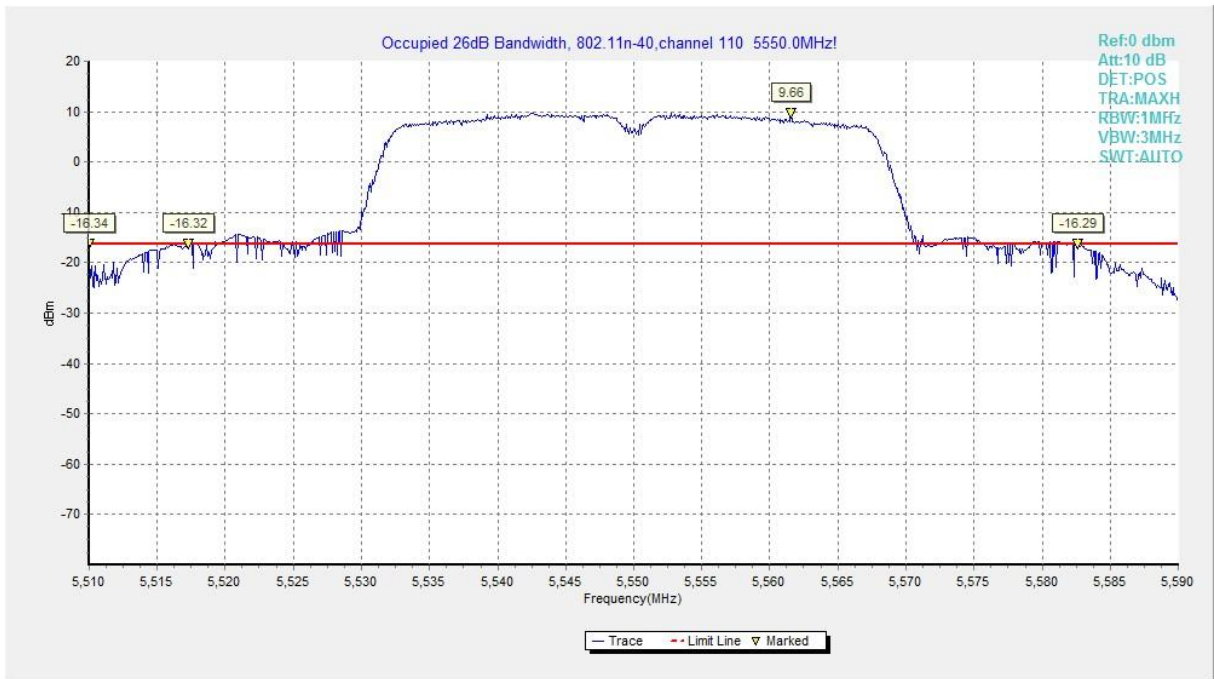


Fig. 24 Occupied 26dB Bandwidth (802. 11n-HT40, 5590MHz)

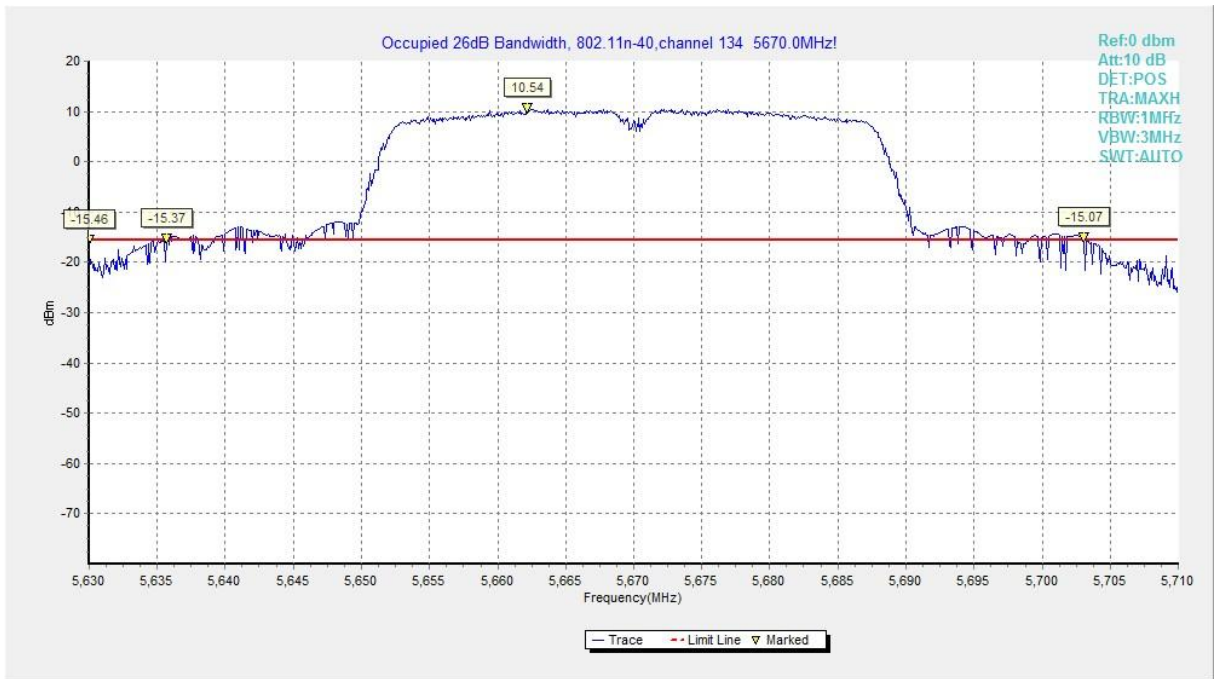


Fig. 25 Occupied 26dB Bandwidth (802. 11n-HT40, 5670MHz)

A.5. Band Edges Compliance

A5.1 Band Edges - conducted

Measurement Limit:

Standard	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	< -27

The measurement is made according to KDB 789033 D02

Measurement Uncertainty:


Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.26	P
	5320 MHz	Fig.27	P
	5500 MHz	Fig.28	P
	5700 MHz	Fig.29	P
802.11n HT20	5180 MHz	Fig.30	P
	5320 MHz	Fig.31	P
	5500 MHz	Fig.32	P
	5700 MHz	Fig.33	P
802.11n HT40	5190 MHz	Fig.34	P
	5310 MHz	Fig.35	P
	5510 MHz	Fig.36	P
	5670 MHz	Fig.37	P


Conclusion: PASS

Test graphs as below:

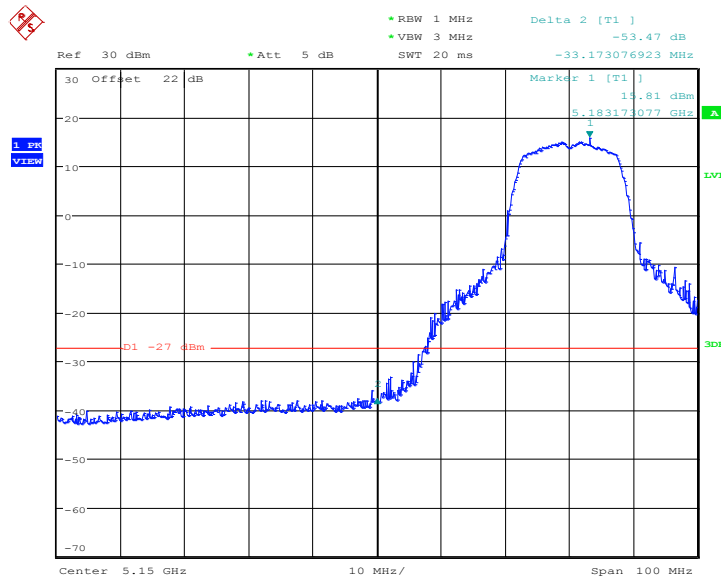


Date: 18.SEP.2014 16:19:56

Fig. 26 Band Edges (802.11a, 5180MHz)

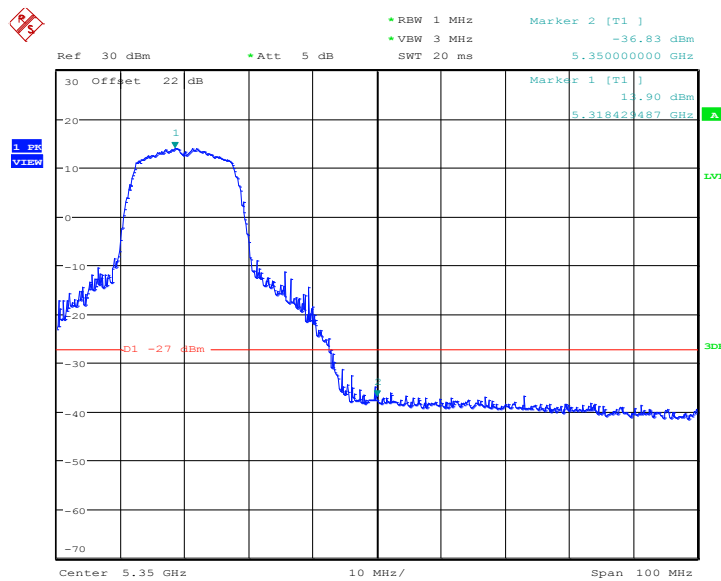


Date: 18.SEP.2014 16:28:17

Fig. 27 Band Edges (802.11a, 5320MHz)

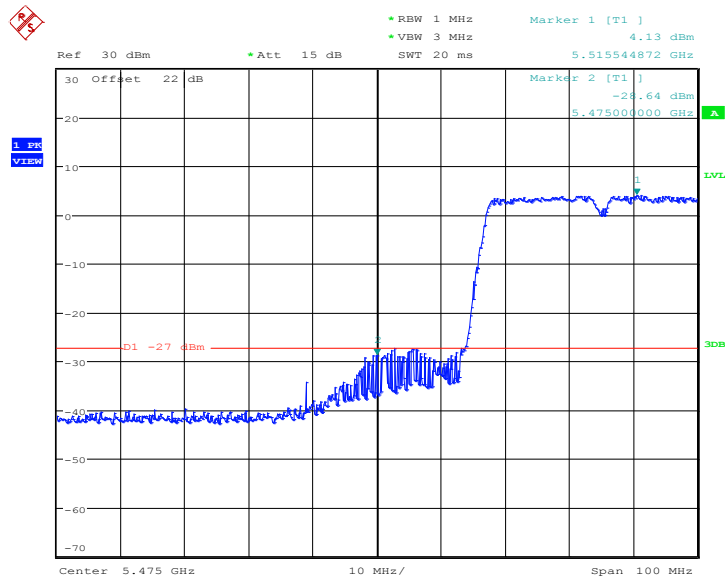


Date: 18.SEP.2014 16:45:39

Fig. 28 Band Edges (802.11a, 5500MHz)

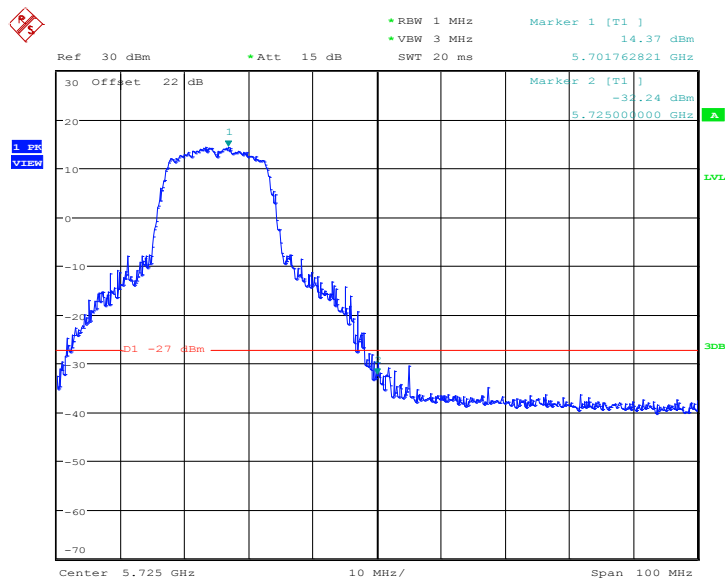


Date: 18.SEP.2014 16:48:28

Fig. 29 Band Edges (802.11a, 5700MHz)

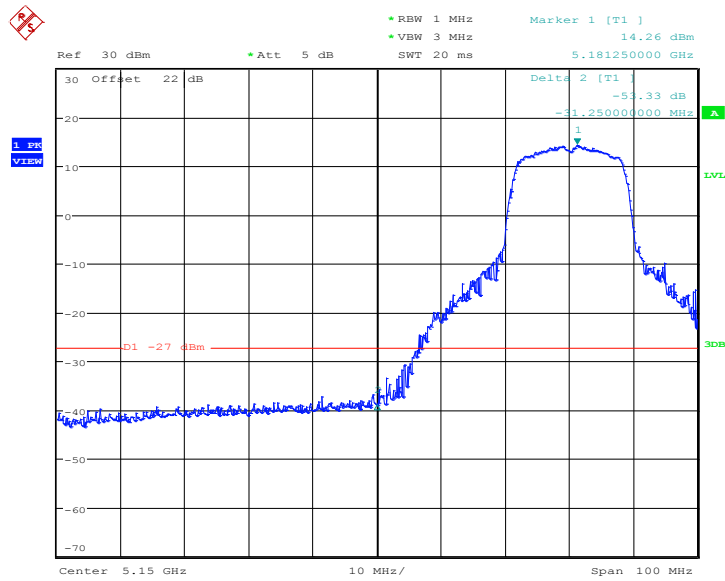


Date: 18.SEP.2014 16:20:33

Fig. 30 Band Edges (802.11n-HT20, 5180MHz)

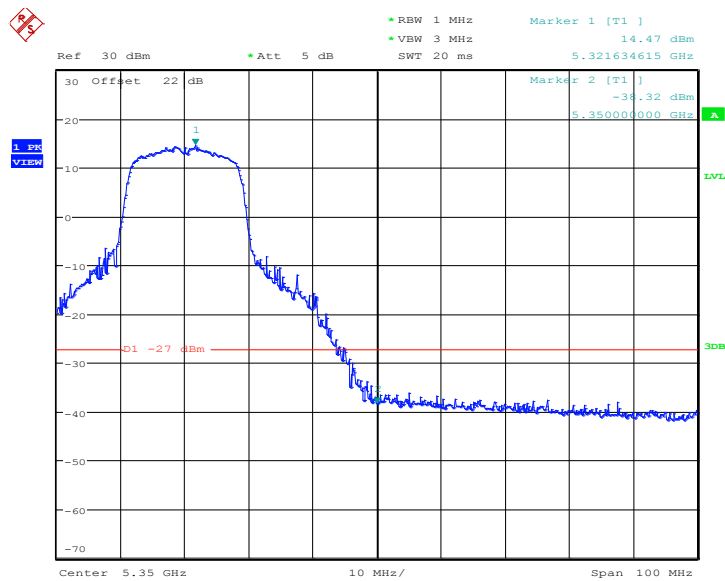


Date: 18.SEP.2014 16:25:50

Fig. 31 Band Edges (802.11n-HT20, 5320MHz)

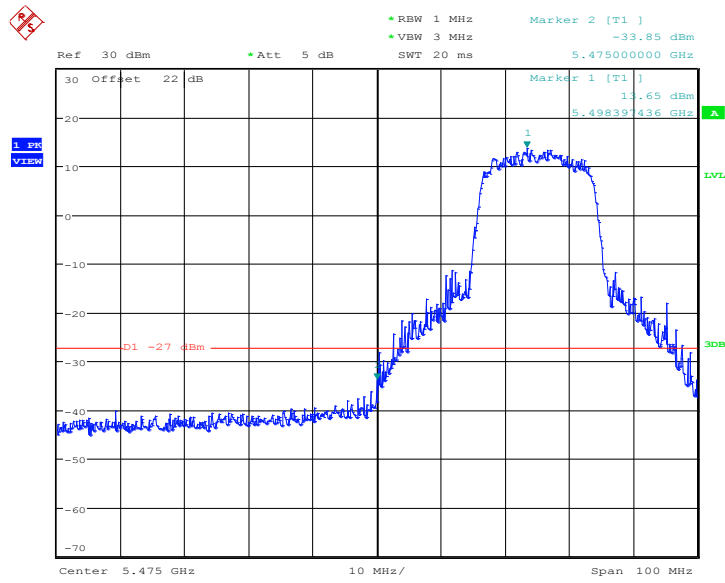


Date: 18.SEP.2014 16:31:45

Fig. 32 Band Edges (802.11n-HT20, 5500MHz)

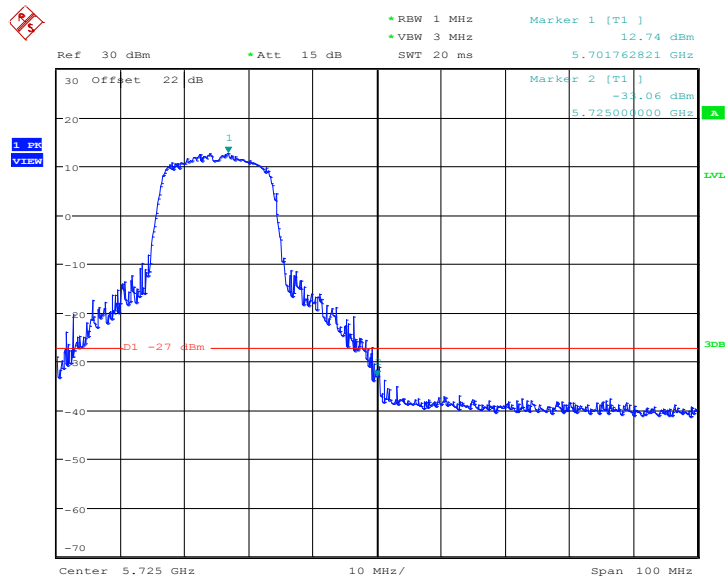


Date: 18.SEP.2014 16:48:00

Fig. 33 Band Edges (802.11n-HT20, 5700MHz)

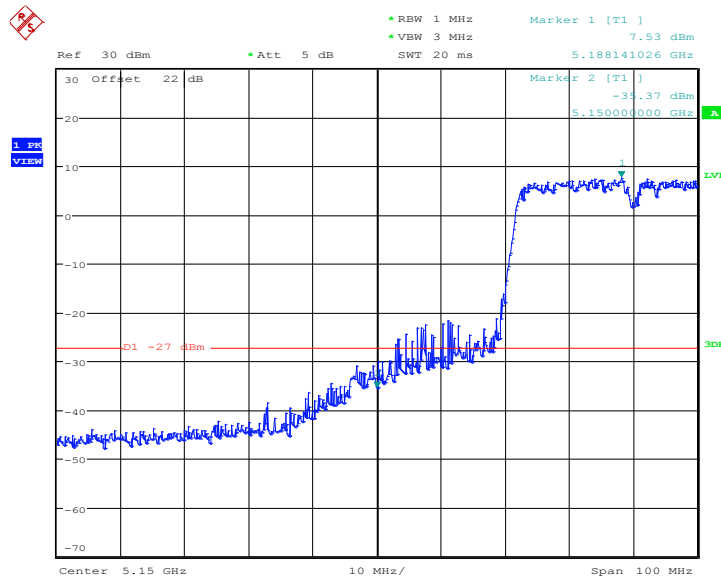


Date: 18.SEP.2014 16:22:44

Fig. 34 Band Edges (802.11n-HT40, 5190MHz)

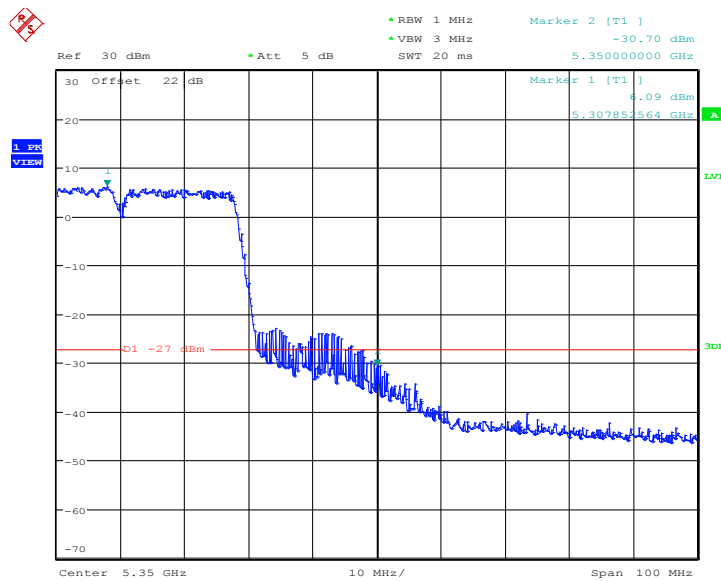


Date: 18.SEP.2014 16:24:39

Fig. 35 Band Edges (802.11n-HT40, 5310MHz)

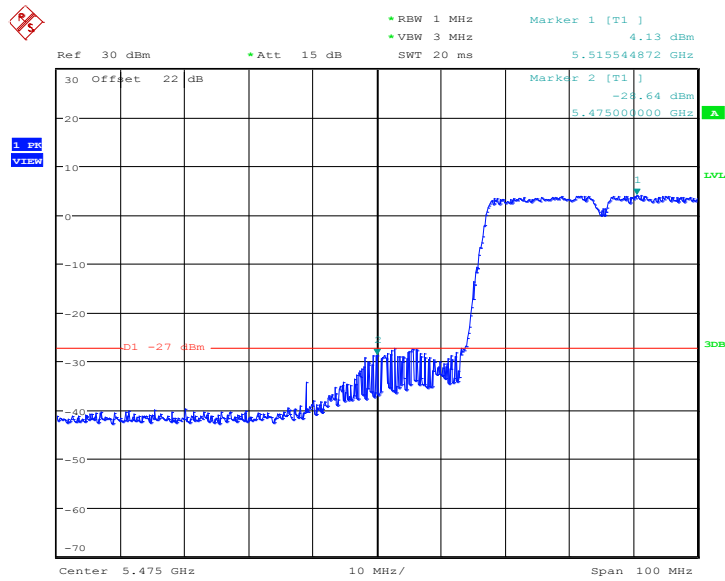

Date: 18.SEP.2014 16:45:39

Fig. 36 Band Edges (802.11n-HT40, 5510MHz)

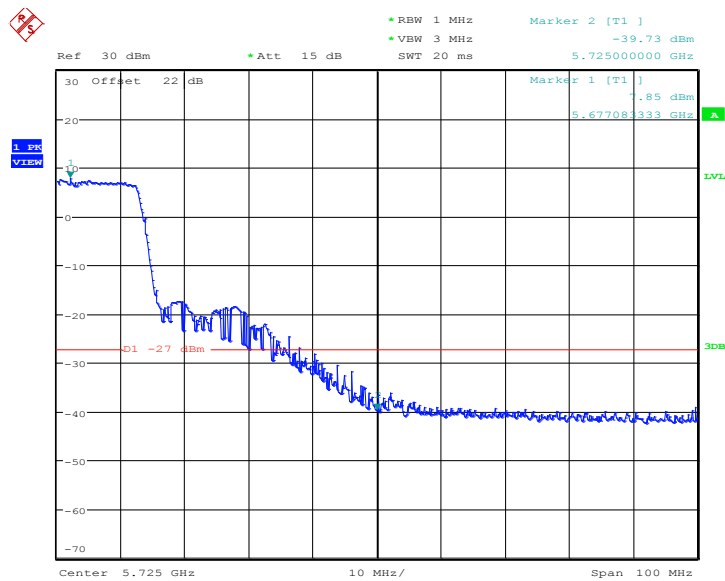

Date: 18.SEP.2014 16:46:44

Fig. 37 Band Edges (802.11n-HT40, 5670MHz)

A5.2 Band Edges - Radiated

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.209	> 20

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.38	P
	5320 MHz	Fig.39	P
	5500 MHz	Fig.40	P
	5700 MHz	Fig.41	P
802.11n HT20	5180 MHz	Fig.42	P
	5320 MHz	Fig.43	P
	5500 MHz	Fig.44	P
	5700 MHz	Fig.45	P
802.11n HT40	5190 MHz	Fig.46	P
	5310 MHz	Fig.47	P
	5510 MHz	Fig.48	P
	5670 MHz	Fig.49	P

Conclusion: PASS

Test graphs as below:

RE-Power_5.125G-5.175GHz

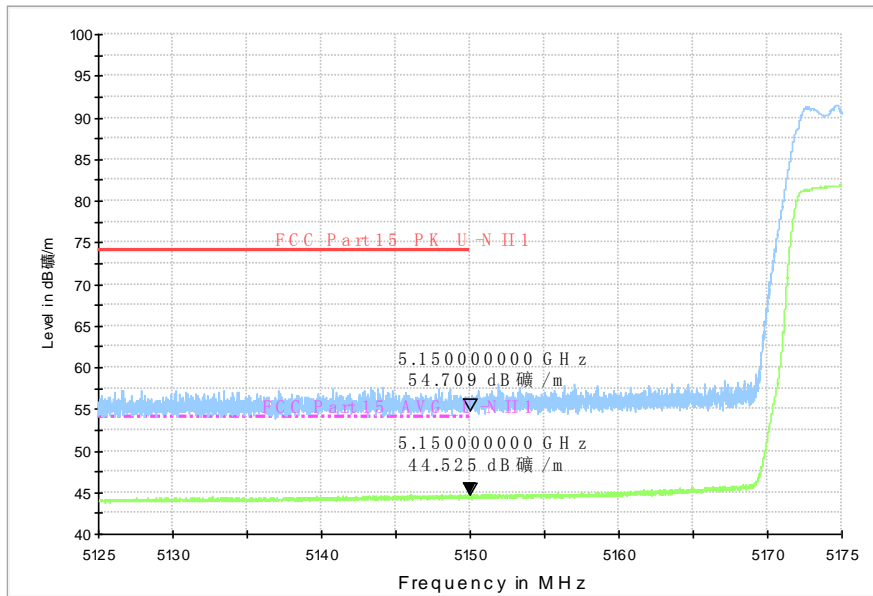


Fig. 38 Band Edges (802.11a, 5180MHz)

RE-Power_5.325G-5.375GHz

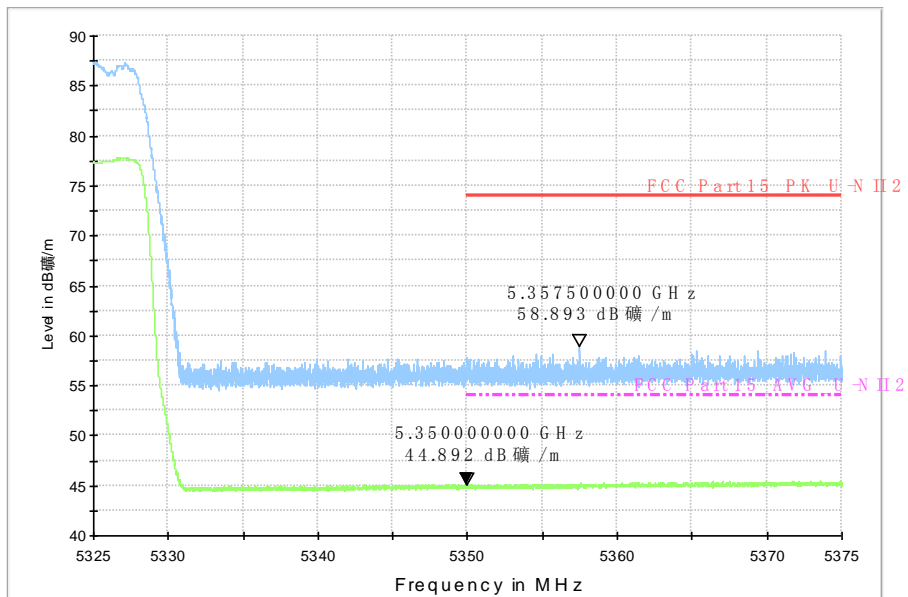


Fig. 39 Band Edges (802.11a, 5320MHz)

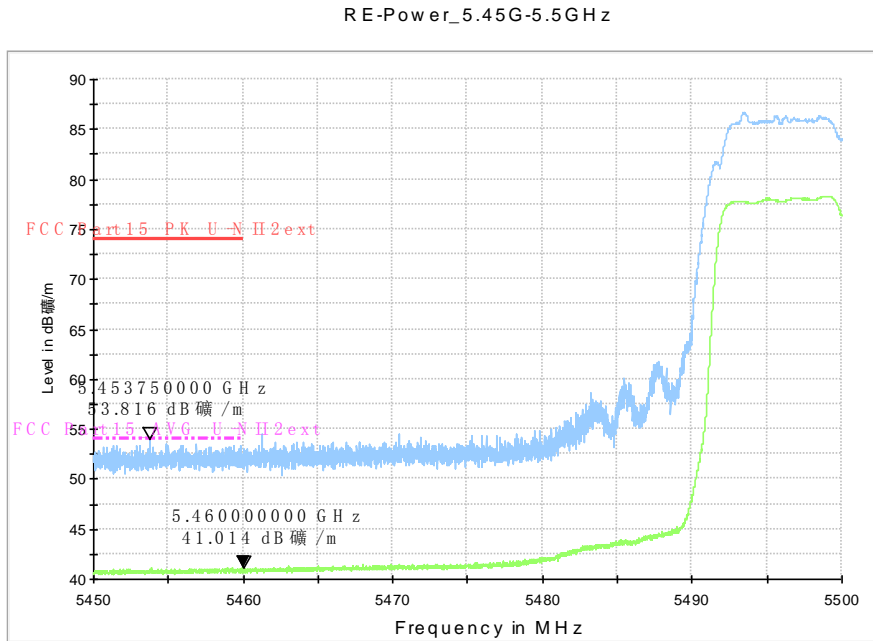


Fig. 40 Band Edges (802.11a, 5500MHz)

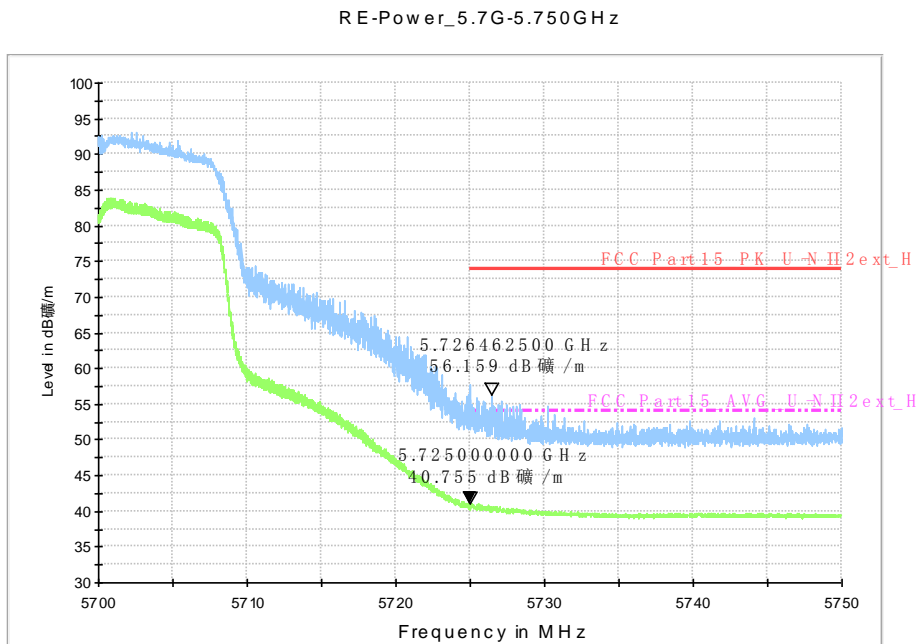


Fig. 41 Band Edges (802.11a, 5700MHz)

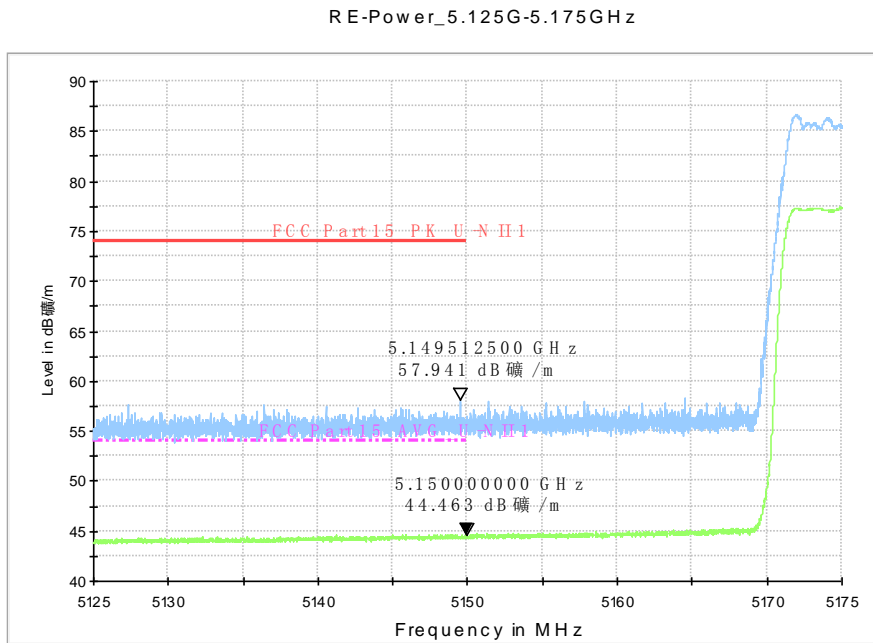


Fig. 42 Band Edges (802.11n-HT20, 5180MHz)

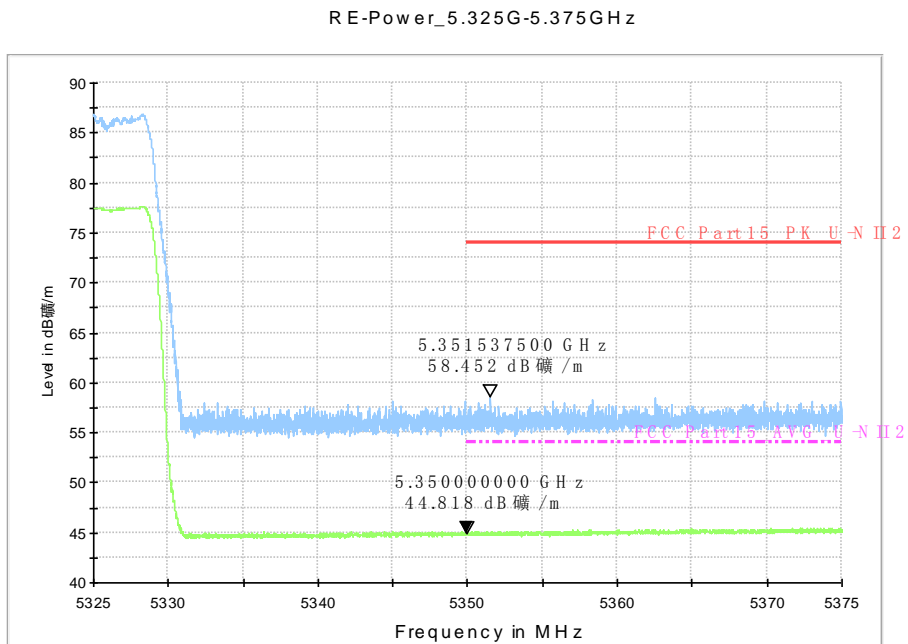


Fig. 43 Band Edges (802.11n-HT20, 5320MHz)

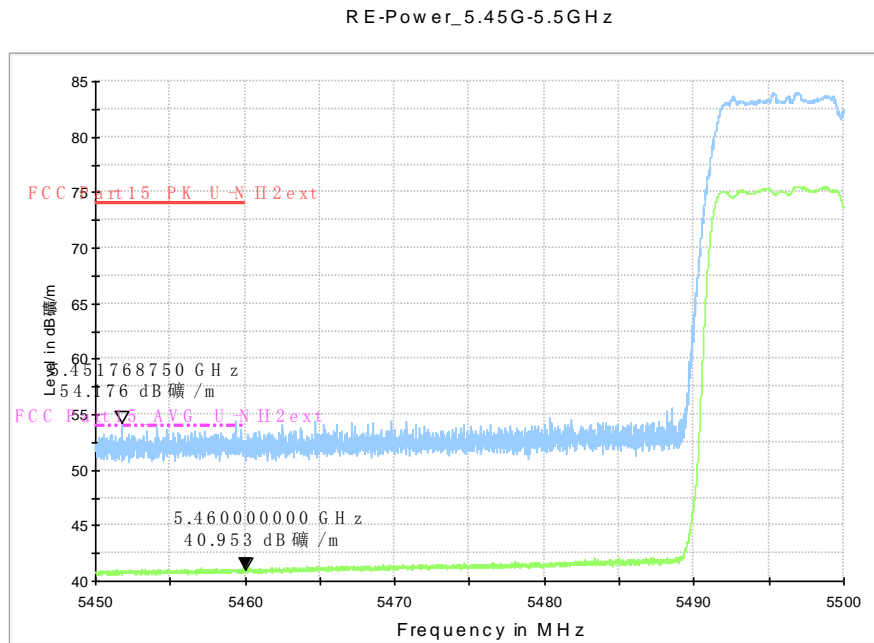


Fig. 44 Band Edges (802.11n-HT20, 5500MHz)

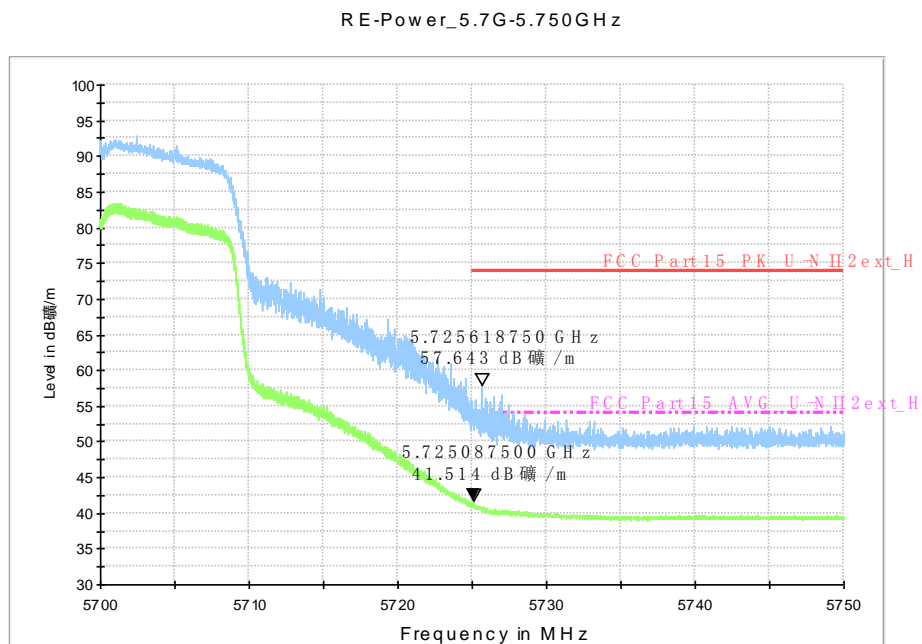


Fig. 45 Band Edges (802.11n-HT20, 5700MHz)

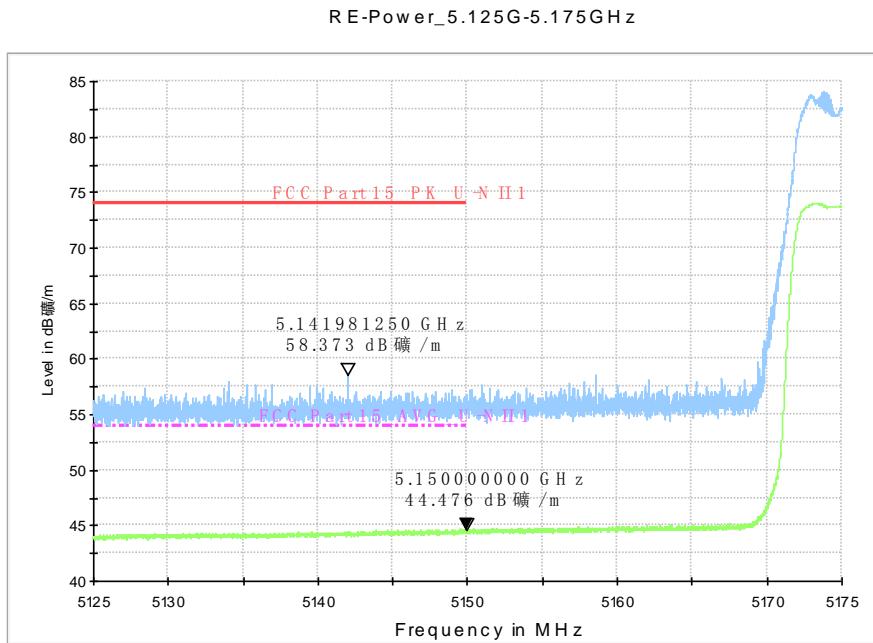


Fig. 46 Band Edges (802.11n-HT40, 5190MHz)

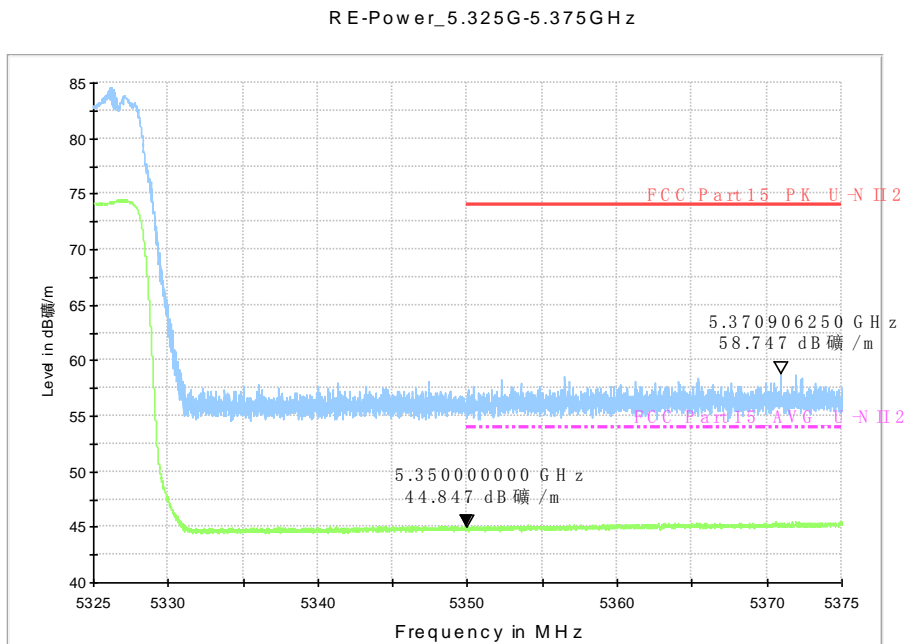


Fig. 47 Band Edges (802.11n-HT40, 5310MHz)

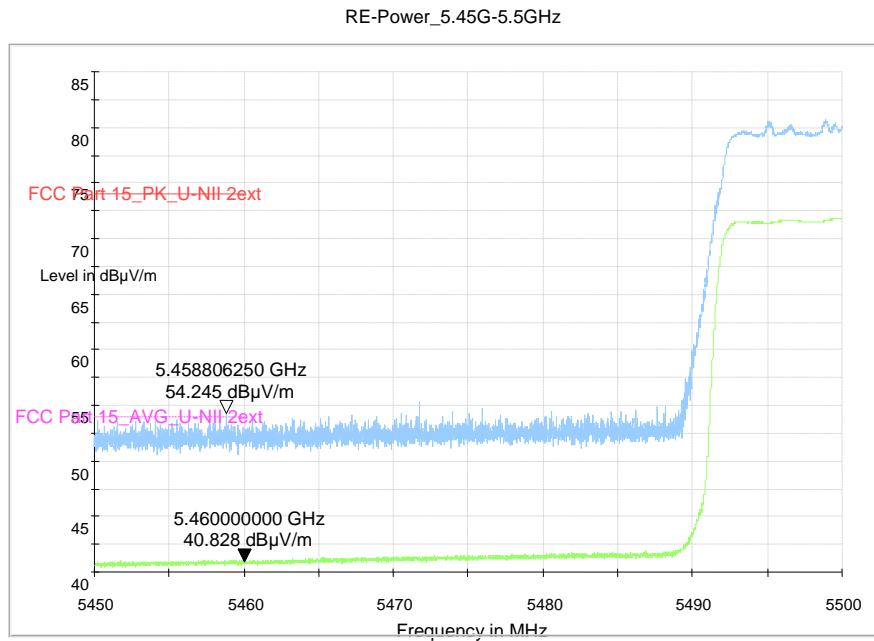


Fig. 48 Band Edges (802.11n-HT40, 5510MHz)

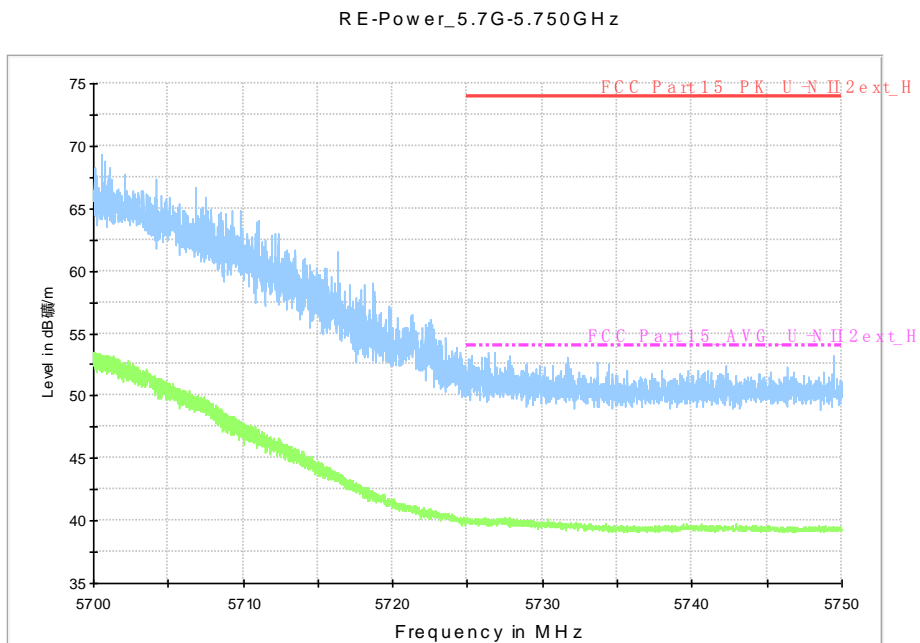


Fig. 49 Band Edges (802.11n-HT40, 5670MHz)

A.6. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(dB μ V/m)	Measurement distance(m)
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Note: for frequency range below 960MHz, the limit in 15.209 is defined in 10m test distance. The limit used above is calculated from 10m to 3m

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.9 dB, k=2.

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	36(5180MHz)	1 GHz ~ 6 GHz	Fig.50	P
		6 GHz ~ 18 GHz	Fig.51	P
	40(5200MHz)	30 MHz ~1 GHz	Fig.52	P
		1 GHz ~ 6 GHz	Fig.53	P
		6 GHz ~ 18 GHz	Fig.54	P
		18 GHz ~ 26.5 GHz	Fig.55	P
		26.5 GHz ~ 40 GHz	Fig.56	P
	48(5240MHz)	1 GHz ~ 6 GHz	Fig.57	P
		6 GHz ~ 18 GHz	Fig.58	P
	52(5260MHz)	1 GHz ~ 6 GHz	Fig.59	P
		6 GHz ~ 18 GHz	Fig.60	P
	56(5280MHz)	30 MHz ~1 GHz	Fig.61	P
		1 GHz ~ 6 GHz	Fig.62	P
		6 GHz ~ 18 GHz	Fig.63	P
		18 GHz ~ 26.5 GHz	Fig.64	P
		26.5 GHz ~ 40 GHz	Fig.65	P
	64(5320MHz)	1 GHz ~ 6 GHz	Fig.66	P
		6 GHz ~ 18 GHz	Fig.67	P
	100(5500MHz)	1 GHz ~ 6 GHz	Fig.68	P
		6 GHz ~ 18 GHz	Fig.69	P
	120(5600MHz)	30 MHz ~1 GHz	Fig.70	P
		1 GHz ~ 6 GHz	Fig.71	P
		6 GHz ~ 18 GHz	Fig.72	P
		18 GHz ~ 26.5 GHz	Fig.73	P
		26.5 GHz ~ 40 GHz	Fig.74	P
	140(5700MHz)	1 GHz ~ 6 GHz	Fig.75	P
		6 GHz ~ 18 GHz	Fig.76	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~ 6 GHz	Fig.77	P
		6 GHz ~ 18 GHz	Fig.78	P
	40(5200MHz)	30 MHz ~1 GHz	Fig.79	P
		1 GHz ~ 6 GHz	Fig.80	P
		6 GHz ~ 18 GHz	Fig.81	P
		18 GHz ~ 26.5 GHz	Fig.82	P
		26.5 GHz ~ 40 GHz	Fig.83	P
	48(5240MHz)	1 GHz ~ 6 GHz	Fig.84	P
		6 GHz ~ 18 GHz	Fig.85	P
	52(5260MHz)	1 GHz ~ 6 GHz	Fig.86	P
		6 GHz ~ 18 GHz	Fig.87	P
	56(5280MHz)	30 MHz ~1 GHz	Fig.88	P
		1 GHz ~ 6 GHz	Fig.89	P
		6 GHz ~ 18 GHz	Fig.90	P
		18 GHz ~ 26.5 GHz	Fig.91	P
		26.5 GHz ~ 40 GHz	Fig.92	P
	64(5320MHz)	1 GHz ~ 6 GHz	Fig.93	P
		6 GHz ~ 18 GHz	Fig.94	P
	100(5500MHz)	1 GHz ~ 6 GHz	Fig.95	P
		6 GHz ~ 18 GHz	Fig.96	P
	120(5600MHz)	30 MHz ~1 GHz	Fig.97	P
		1 GHz ~ 6 GHz	Fig.98	P
		6 GHz ~ 18 GHz	Fig.99	P
		18 GHz ~ 26.5 GHz	Fig.100	P
		26.5 GHz ~ 40 GHz	Fig.101	P
	140(5700MHz)	1 GHz ~ 6 GHz	Fig.102	P
		6 GHz ~ 18 GHz	Fig.103	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	38(5190MHz)	30 MHz ~1 GHz	Fig.104	P
		1 GHz ~ 6 GHz	Fig.105	P
		6 GHz ~ 18 GHz	Fig.106	P
		18 GHz ~ 26.5 GHz	Fig.107	P
		26.5 GHz ~ 40 GHz	Fig.108	P
	46(5230MHz)	1 GHz ~ 6 GHz	Fig.109	P
		6 GHz ~ 18 GHz	Fig.110	P
		1 GHz ~ 6 GHz	Fig.111	P
		6 GHz ~ 18 GHz	Fig.112	P
	62(5310MHz)	30 MHz ~1 GHz	Fig.113	P
		1 GHz ~ 6 GHz	Fig.114	P
		6 GHz ~ 18 GHz	Fig.115	P
		18 GHz ~ 26.5 GHz	Fig.116	P
		26.5 GHz ~ 40 GHz	Fig.117	P
	102(5510MHz)	1 GHz ~ 6 GHz	Fig.118	P
		6 GHz ~ 18 GHz	Fig.119	P
	120(5600MHz)	30 MHz ~1 GHz	Fig.120	P
		1 GHz ~ 6 GHz	Fig.121	P
		6 GHz ~ 18 GHz	Fig.122	P
		18 GHz ~ 26.5 GHz	Fig.123	P
26.5 GHz ~ 40 GHz		Fig.124	P	
134(5670MHz)	1 GHz ~ 6 GHz	Fig.125	P	
	6 GHz ~ 18 GHz	Fig.126	P	

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11a

Channel 36

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5148.618	57.4	-35.1	34.6	57.900	H
17989.500	55.7	-17.7	45.6	27.800	V
17964.000	55.5	-17.7	45.6	27.600	V
17977.500	55.2	-17.7	45.6	27.300	V
17814.000	55.2	-18.5	45.6	28.100	V
17806.500	54.8	-18.5	45.6	27.700	V

Channel 40

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17992.500	56.0	-17.7	45.6	28.100	V
17997.000	55.9	-17.7	45.6	28.000	V
17986.500	55.8	-17.7	45.6	27.900	V
17964.000	55.4	-17.7	45.6	27.500	H
17971.500	55.0	-17.7	45.6	27.100	V
17991.000	54.9	-17.7	45.6	27.000	V

Channel 48

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17953.500	55.2	-17.7	45.6	27.300	V
17685.000	55.0	-18.9	45.6	28.300	V
17928.000	55.0	-17.7	45.6	27.100	H
17997.000	54.9	-17.7	45.6	27.000	V
17995.500	54.8	-17.7	45.6	26.900	V
17985.000	54.7	-17.7	45.6	26.800	V

Channel 52

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17986.500	44.2	-17.7	45.6	16.3	V
17991.000	44.1	-17.7	45.6	16.2	V
17985.000	44.1	-17.7	45.6	16.2	V
18000.000	44.0	-17.7	44.5	17.2	H
17988.000	44.0	-17.7	45.6	16.1	H
17997.000	43.9	-17.7	45.6	16.0	V

Channel 56

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17995.500	44.3	-17.7	45.6	16.4	V
17986.500	44.3	-17.7	45.6	16.4	V
17997.000	44.2	-17.7	45.6	16.3	H
17992.500	44.2	-17.7	45.6	16.3	V
17982.000	44.2	-17.7	45.6	16.3	V
17988.000	44.1	-17.7	45.6	16.2	V

Channel 64

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.000	44.9	-34.8	34.6	45.1	V
17994.000	44.4	-17.7	45.6	16.5	H
17997.000	44.4	-17.7	45.6	16.5	V
17988.000	44.3	-17.7	45.6	16.4	V
17991.000	44.3	-17.7	45.6	16.4	H
17980.500	44.1	-17.7	45.6	16.2	V

Channel 100

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5460.000	41.0	-34.9	34.6	41.3	H
17992.500	44.7	-17.7	45.6	16.8	H
17991.000	44.6	-17.7	45.6	16.7	V
17988.000	44.6	-17.7	45.6	16.7	V
17989.500	44.5	-17.7	45.6	16.6	V
17995.500	44.5	-17.7	45.6	16.6	V

Channel 120

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17991.000	44.5	-17.7	45.6	16.6	V
17994.000	44.3	-17.7	45.6	16.4	V
17998.500	44.2	-17.7	45.6	16.3	V
17985.000	44.2	-17.7	45.6	16.3	V
17997.000	44.2	-17.7	45.6	16.3	V
17988.000	44.2	-17.7	45.6	16.3	V

Channel 140

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17985.000	44.4	-17.7	45.6	16.5	V
17986.500	44.4	-17.7	45.6	16.5	V
17992.500	44.3	-17.7	45.6	16.4	V
17994.000	44.2	-17.7	45.6	16.3	V
17983.500	44.2	-17.7	45.6	16.3	V
17988.000	44.2	-17.7	45.6	16.3	V

802.11n-HT20

Channel 36

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5149.500	57.9	-35.1	34.6	58.400	V
17997.000	55.9	-17.7	45.6	28.000	V
17920.500	55.9	-17.7	45.6	28.000	V
17973.000	55.3	-17.7	45.6	27.400	V
17796.000	55.2	-18.5	45.6	28.100	V
17902.500	55.2	-18.5	45.6	28.100	H

Channel 40

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17974.500	56.1	-17.7	45.6	28.200	V
17964.000	55.5	-17.7	45.6	27.600	H
17994.000	55.5	-17.7	45.6	27.600	V
17913.000	55.1	-18.5	45.6	28.000	V
17776.500	55.0	-18.5	45.6	27.900	V
17970.000	54.9	-17.7	45.6	27.000	V

Channel 48

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17983.500	55.8	-17.7	45.6	27.900	V
18000.000	55.7	-17.7	44.5	28.900	V
17980.500	55.7	-17.7	45.6	27.800	V
17899.500	55.2	-18.5	45.6	28.100	V
17833.500	55.2	-18.5	45.6	28.100	V
17991.000	55.2	-17.7	45.6	27.300	H

Channel 52

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17988.000	44.5	-17.7	45.6	16.6	V
17985.000	44.4	-17.7	45.6	16.5	V
17989.500	44.2	-17.7	45.6	16.3	H
17997.000	44.2	-17.7	45.6	16.3	H
17982.000	44.1	-17.7	45.6	16.2	V
17991.000	44.1	-17.7	45.6	16.2	V

Channel 56

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17997.000	44.3	-17.7	45.6	16.4	V
17998.500	44.3	-17.7	45.6	16.4	V
17983.500	44.2	-17.7	45.6	16.3	V
17989.500	44.2	-17.7	45.6	16.3	V
17991.000	44.1	-17.7	45.6	16.2	V
17992.500	44.1	-17.7	45.6	16.2	V

Channel 64

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.000	44.8	-34.8	34.6	45.0	V
17986.500	44.3	-17.7	45.6	16.4	V
17985.000	44.2	-17.7	45.6	16.3	V
17983.500	44.2	-17.7	45.6	16.3	V
17991.000	44.2	-17.7	45.6	16.3	V
17980.500	44.2	-17.7	45.6	16.3	V

Channel 100

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5460.000	41.0	-34.9	34.6	41.3	V
17997.000	44.5	-17.7	45.6	16.6	V
17991.000	44.5	-17.7	45.6	16.6	H
17988.000	44.4	-17.7	45.6	16.5	V
17986.500	44.3	-17.7	45.6	16.4	V
17994.000	44.3	-17.7	45.6	16.4	V

Channel 120

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17985.000	44.3	-17.7	45.6	16.4	V
17998.500	44.2	-17.7	45.6	16.3	V
17988.000	44.2	-17.7	45.6	16.3	V
17991.000	44.2	-17.7	45.6	16.3	H
17992.500	44.2	-17.7	45.6	16.3	V
17994.000	44.1	-17.7	45.6	16.2	V

Channel 140

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17988.000	44.4	-17.7	45.6	16.5	V
17991.000	44.3	-17.7	45.6	16.4	H
17992.500	44.3	-17.7	45.6	16.4	V
17995.500	44.2	-17.7	45.6	16.3	V
17994.000	44.2	-17.7	45.6	16.3	V
17997.000	44.2	-17.7	45.6	16.3	V

802.11n-HT40

Channel 38

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5141.980	58.4	-35.1	34.6	58.900	V
17968.500	55.9	-17.7	45.6	28.000	V
17811.000	55.3	-18.5	45.6	28.200	V
17979.000	55.2	-17.7	45.6	27.300	V
17791.500	55.1	-18.5	45.6	28.000	V
17929.500	54.8	-17.7	45.6	26.900	V

Channel 46

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17985.000	55.4	-17.7	45.6	27.500	V
17986.500	55.0	-17.7	45.6	27.100	V
17974.500	54.9	-17.7	45.6	27.000	V
17982.000	54.9	-17.7	45.6	27.000	V
17997.000	54.9	-17.7	45.6	27.000	V
17949.000	54.9	-17.7	45.6	27.000	H

Channel 54

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17986.500	44.4	-17.7	45.6	16.5	V
17991.000	44.4	-17.7	45.6	16.5	H
17994.000	44.3	-17.7	45.6	16.4	V
17988.000	44.2	-17.7	45.6	16.3	V
17989.500	44.2	-17.7	45.6	16.3	V
17983.500	44.2	-17.7	45.6	16.3	V

Channel 62

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5350.000	44.8	-34.8	34.6	45.0	V
17988.000	44.5	-17.7	45.6	16.6	V
17991.000	44.4	-17.7	45.6	16.5	V
17994.000	44.3	-17.7	45.6	16.4	H
17985.000	44.2	-17.7	45.6	16.3	V
17989.500	44.2	-17.7	45.6	16.3	V

Channel 102

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
5460.000	40.8	-34.9	34.6	41.1	H
17997.000	44.4	-17.7	45.6	16.5	V
17995.500	44.4	-17.7	45.6	16.5	V
17992.500	44.3	-17.7	45.6	16.4	V
17988.000	44.2	-17.7	45.6	16.3	V
17991.000	44.2	-17.7	45.6	16.3	V

Channel 118

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17994.000	44.4	-17.7	45.6	16.5	V
17988.000	44.3	-17.7	45.6	16.4	V
17983.500	44.3	-17.7	45.6	16.4	V
17991.000	44.3	-17.7	45.6	16.4	V
17995.500	44.2	-17.7	45.6	16.3	V
17997.000	44.2	-17.7	45.6	16.3	H

Channel 134

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17991.000	44.5	-17.7	45.6	16.6	H
17994.000	44.4	-17.7	45.6	16.5	V
17985.000	44.2	-17.7	45.6	16.3	V
17988.000	44.2	-17.7	45.6	16.3	H
17989.500	44.2	-17.7	45.6	16.3	V
17983.500	44.2	-17.7	45.6	16.3	V

Test graphs as below:

RE_WLAN_1G-6GHz

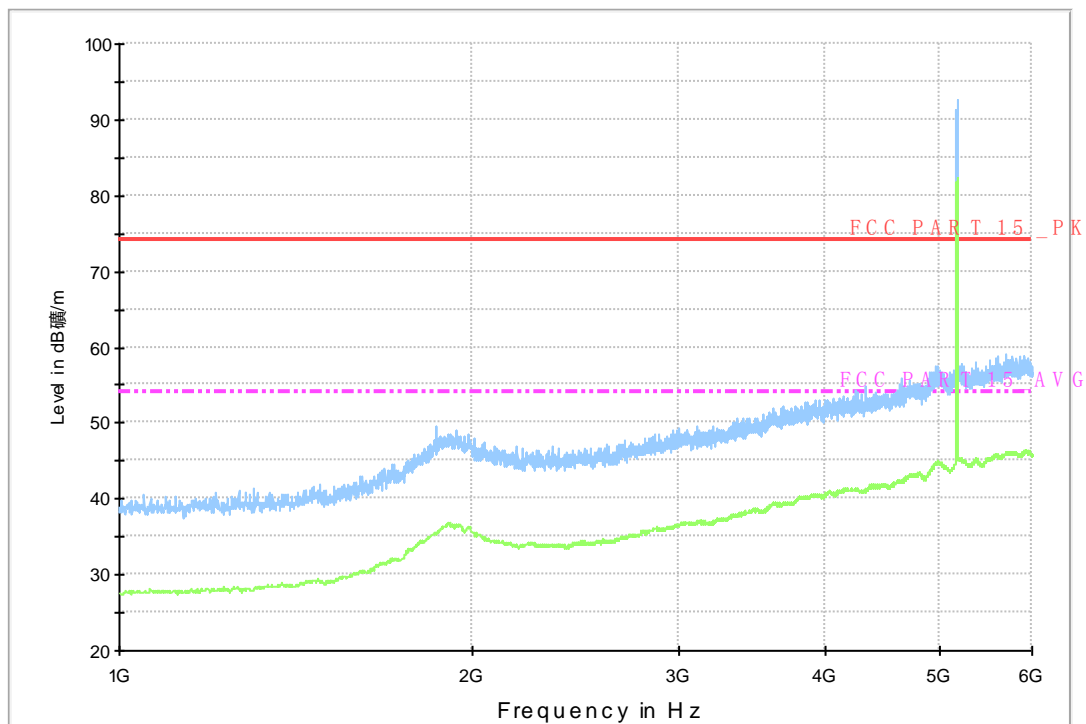


Fig. 50 Radiated Spurious Emission (802.11a, ch36, 1 GHz-6 GHz)

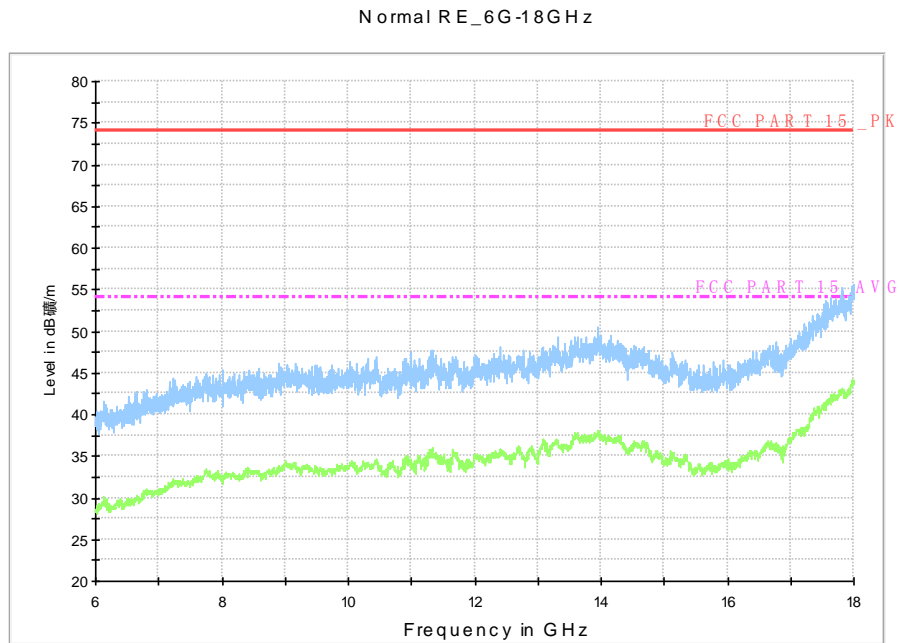


Fig. 51 Radiated Spurious Emission (802.11a, ch36, 6 GHz-18 GHz)

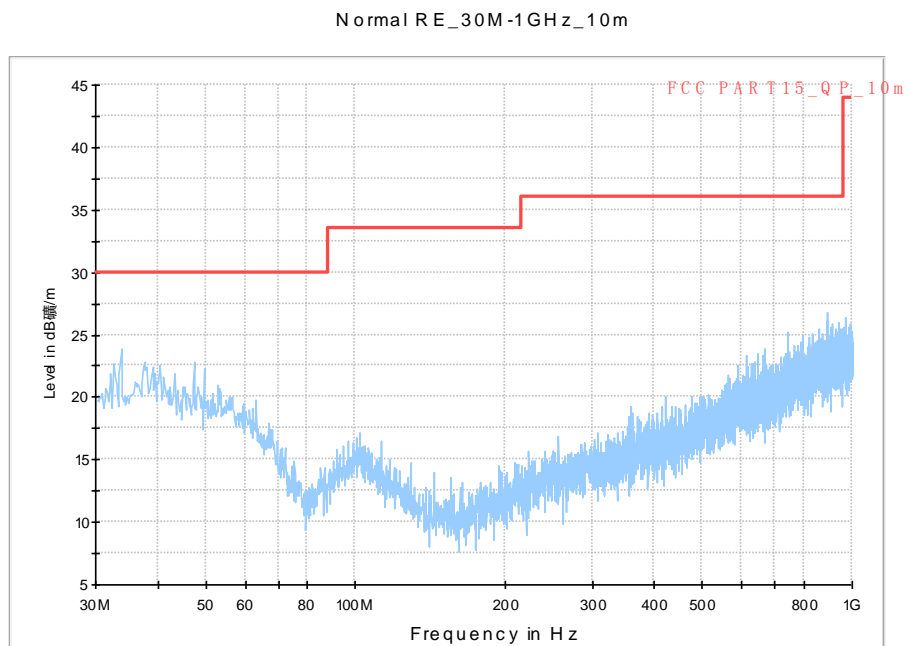


Fig. 52 Radiated Spurious Emission (802.11a, ch40, 30 MHz-1 GHz)

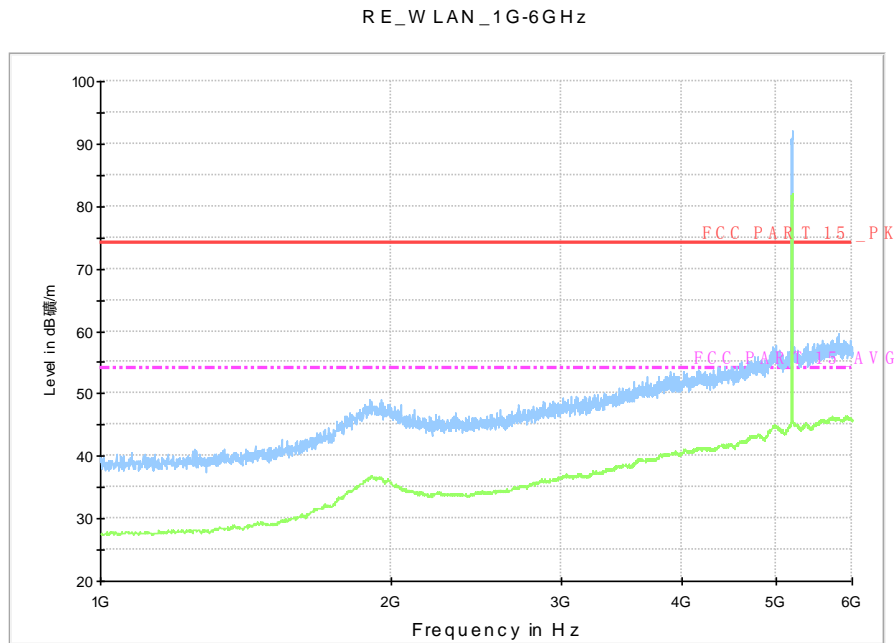


Fig. 53 Radiated Spurious Emission (802.11a, ch40, 1 GHz-6 GHz)

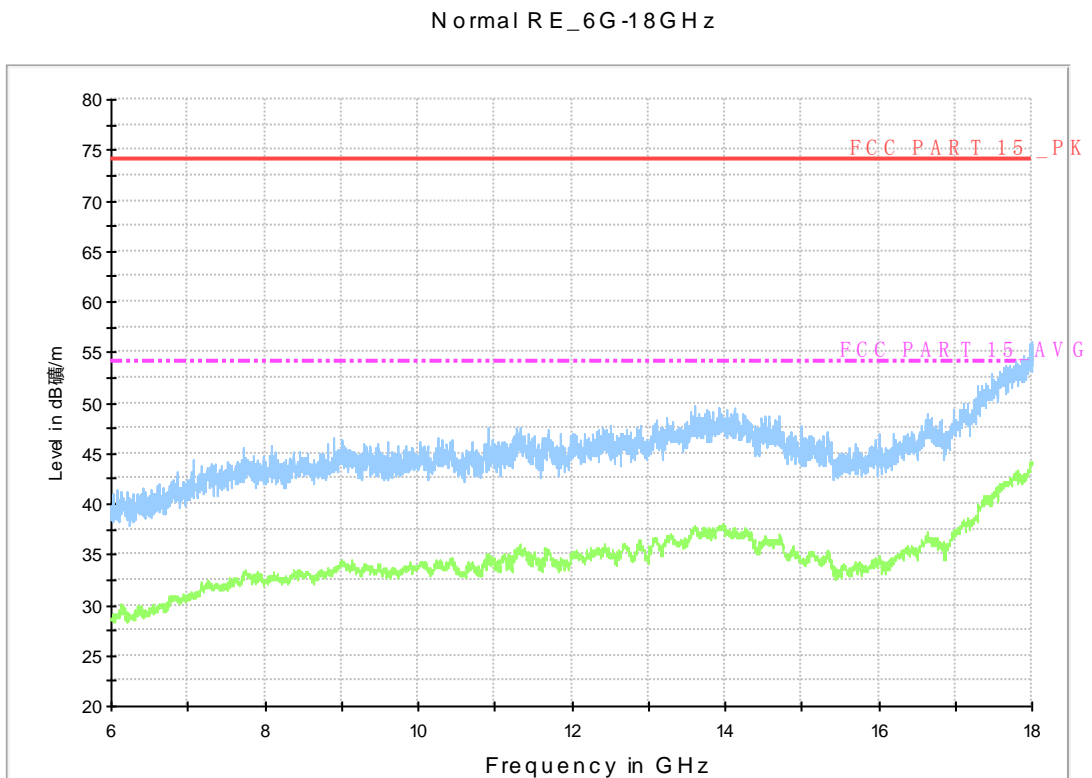


Fig. 54 Radiated Spurious Emission (802.11a, ch40, 6 GHz-18 GHz)

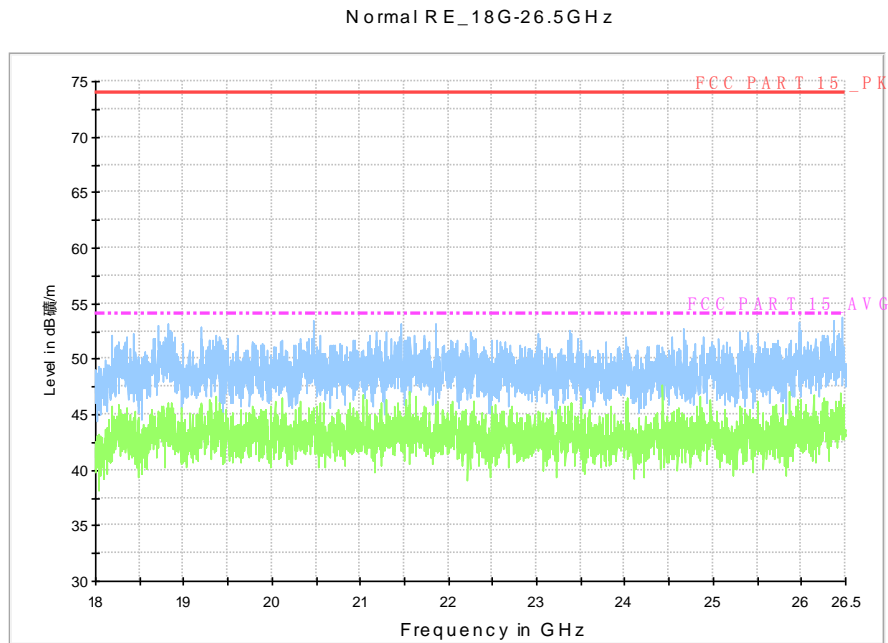


Fig. 55 Radiated Spurious Emission (802.11a, ch40, 18 GHz-26.5 GHz)

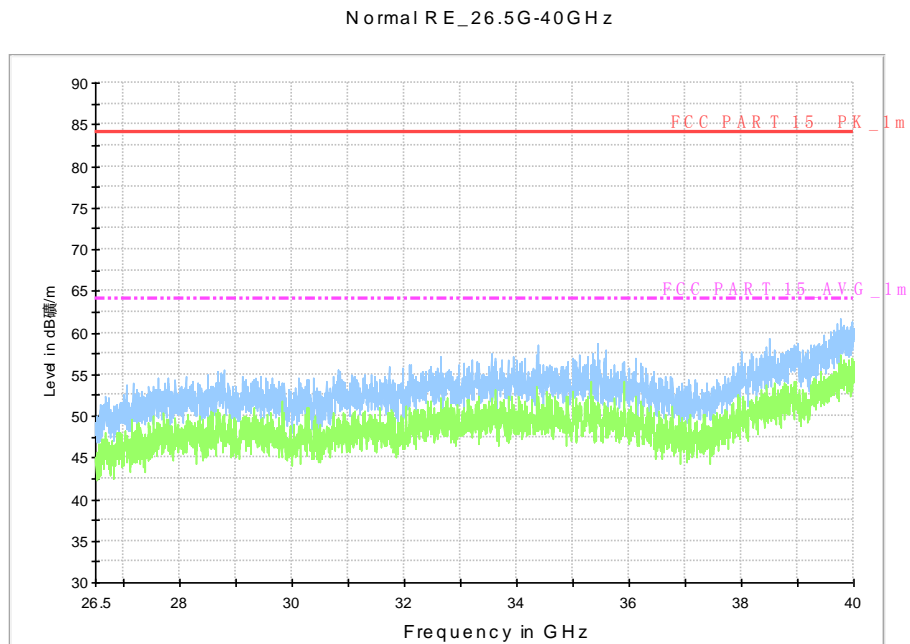


Fig. 56 Radiated Spurious Emission (802.11a, ch40, 26.5 GHz-40 GHz)

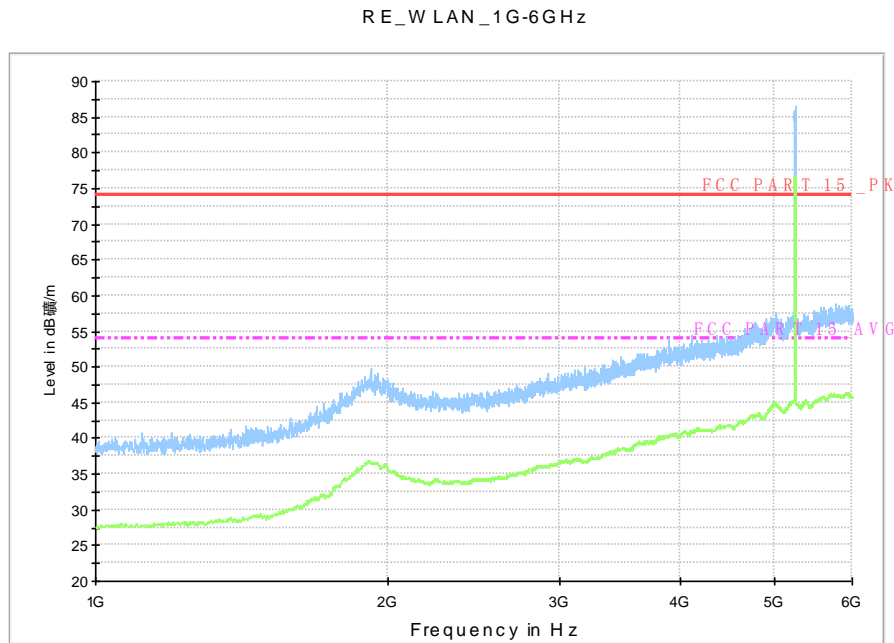


Fig. 57 Radiated Spurious Emission (802.11a, ch48, 1 GHz-6 GHz)

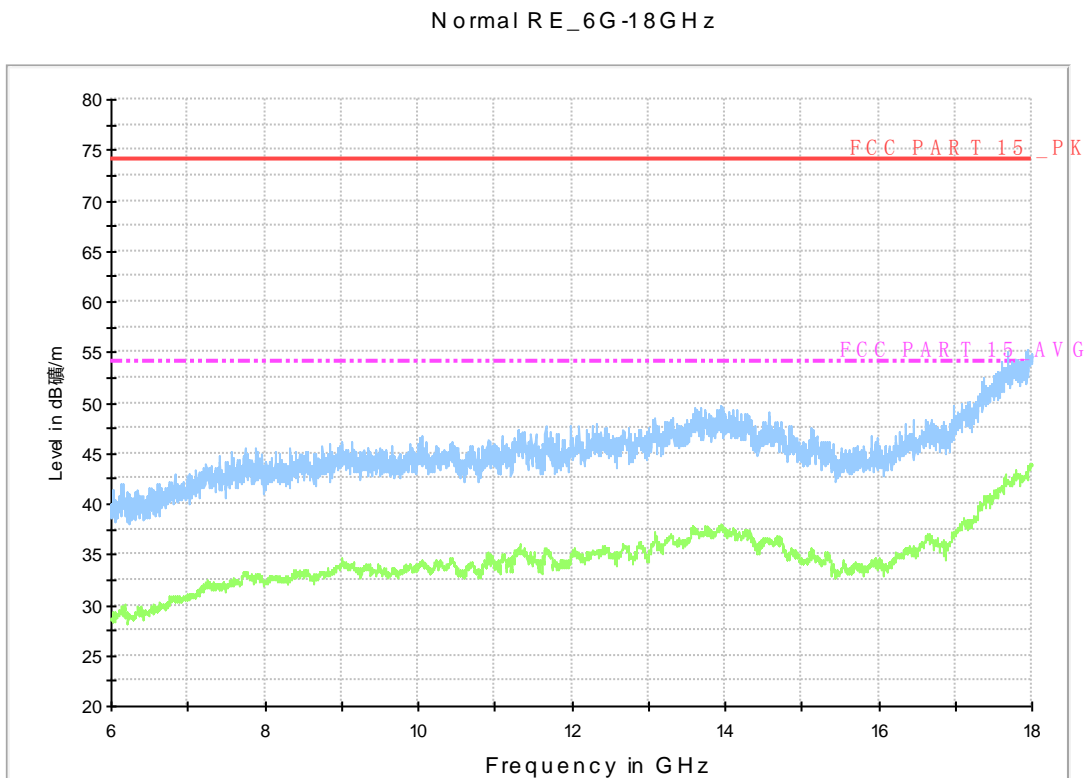


Fig. 58 Radiated Spurious Emission (802.11a, ch48, 6 GHz-18 GHz)

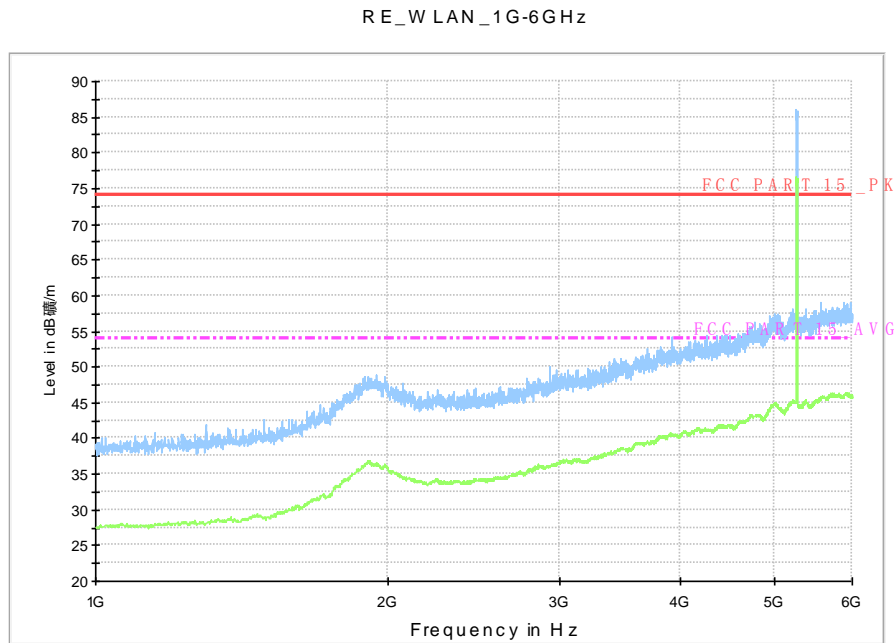


Fig. 59 Radiated Spurious Emission (802.11a, ch52, 1 GHz-6 GHz)

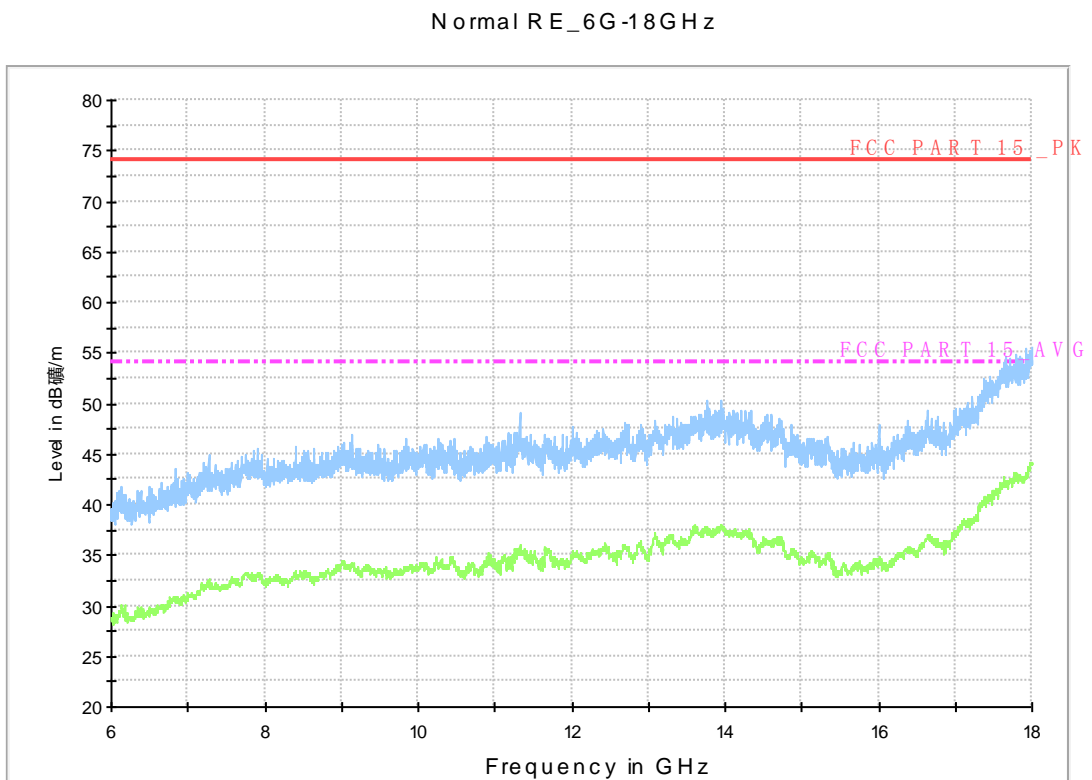


Fig. 60 Radiated Spurious Emission (802.11a, ch52, 6 GHz-18 GHz)

Normal RE_30M-1GHz_10m

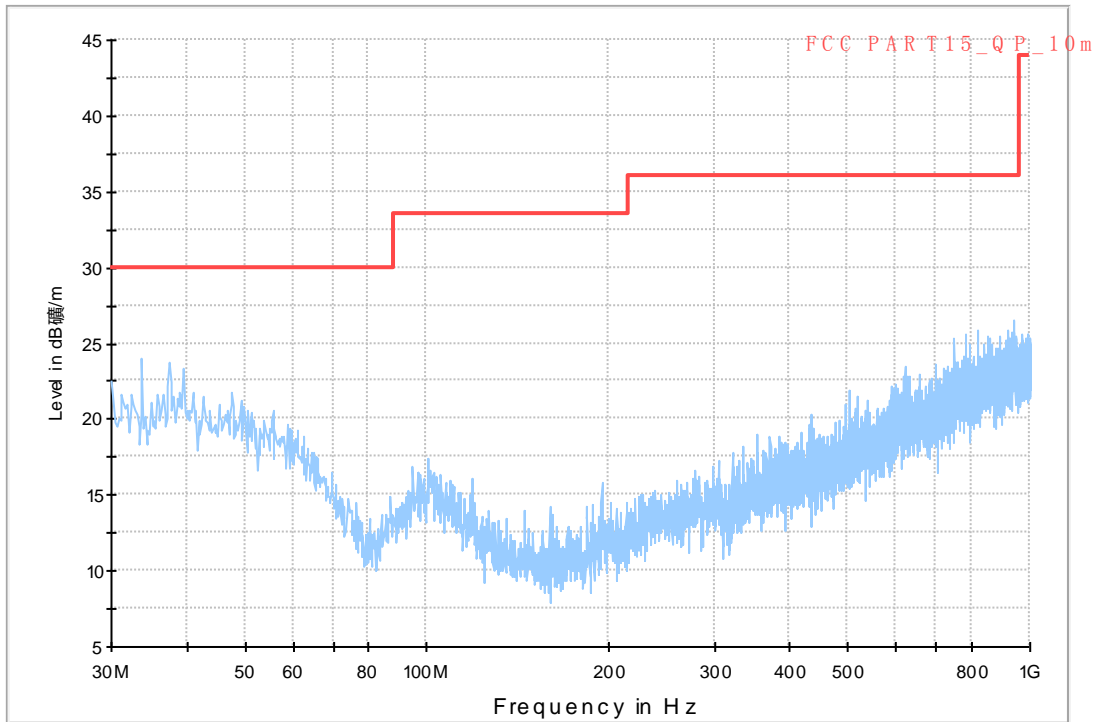


Fig. 61 Radiated Spurious Emission (802.11a, ch56, 30 MHz-1 GHz)

RE_WLAN_1G-6GHz

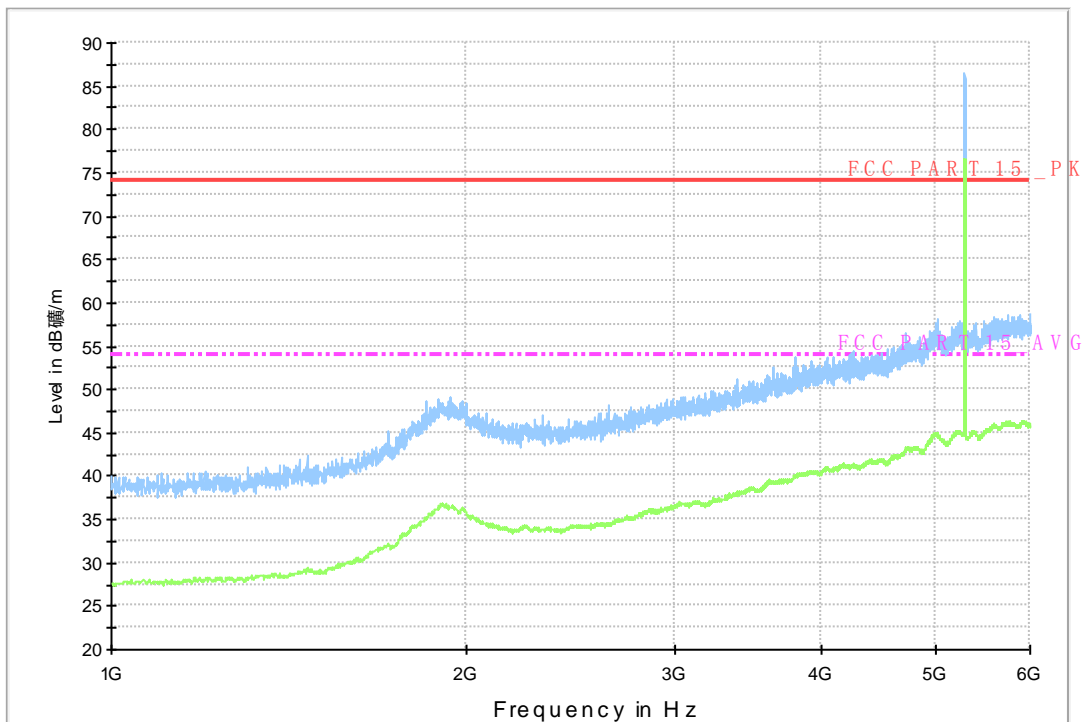


Fig. 62 Radiated Spurious Emission (802.11a, ch56, 1 GHz-6 GHz)

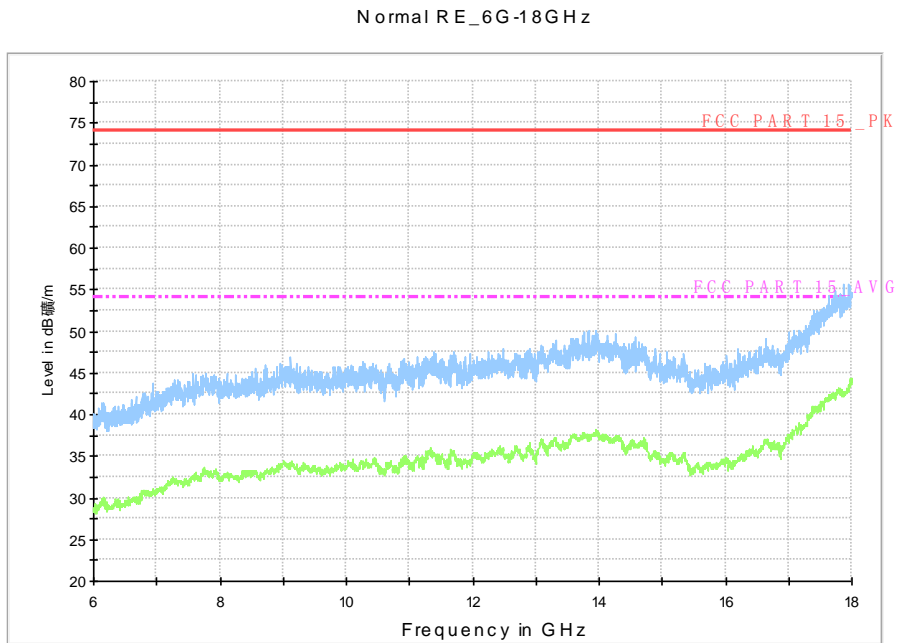


Fig. 63 Radiated Spurious Emission (802.11a, ch56, 6 GHz-18 GHz)

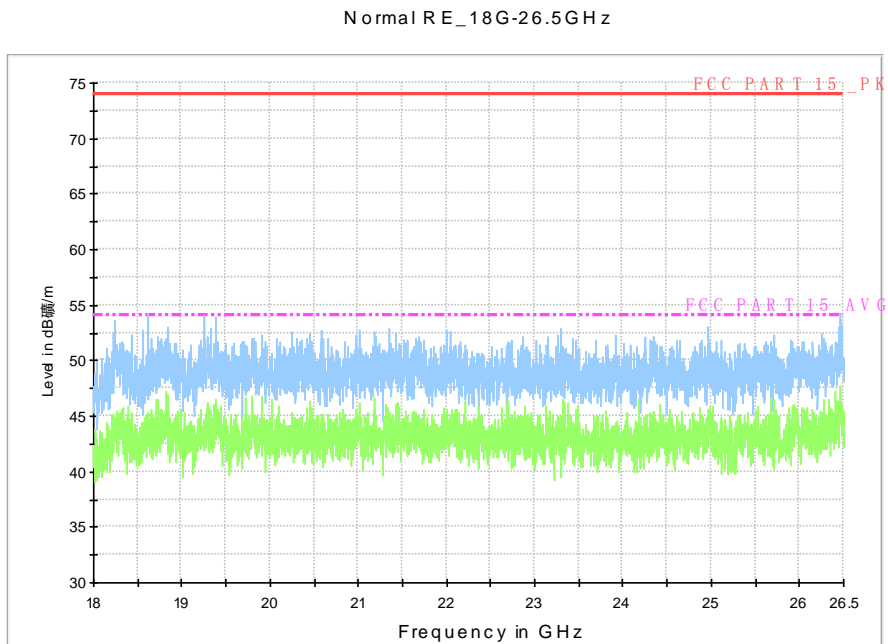


Fig. 64 Radiated Spurious Emission (802.11a, ch56, 18 GHz-26.5 GHz)

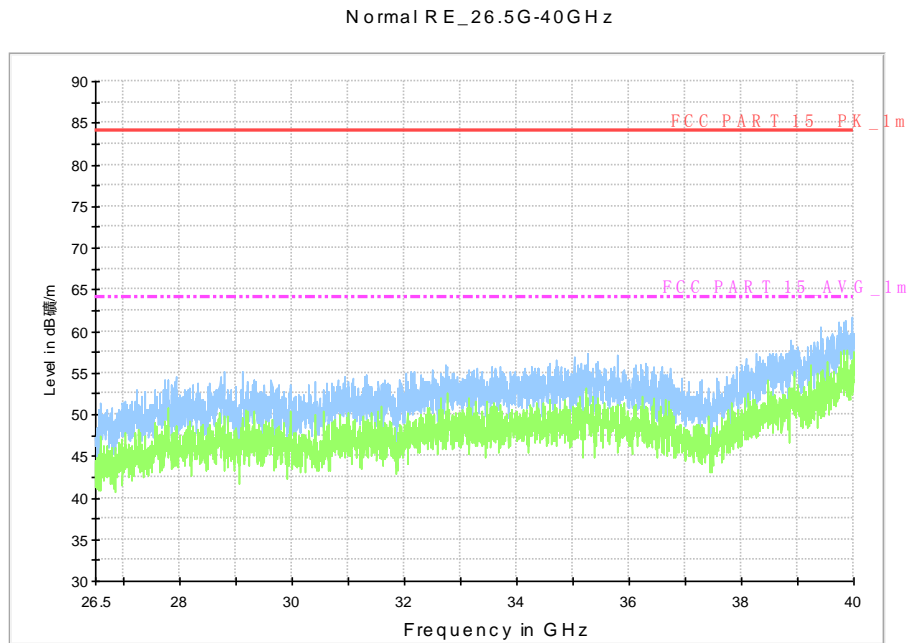


Fig. 65 Radiated Spurious Emission (802.11a, ch56, 26.5 GHz-40 GHz)

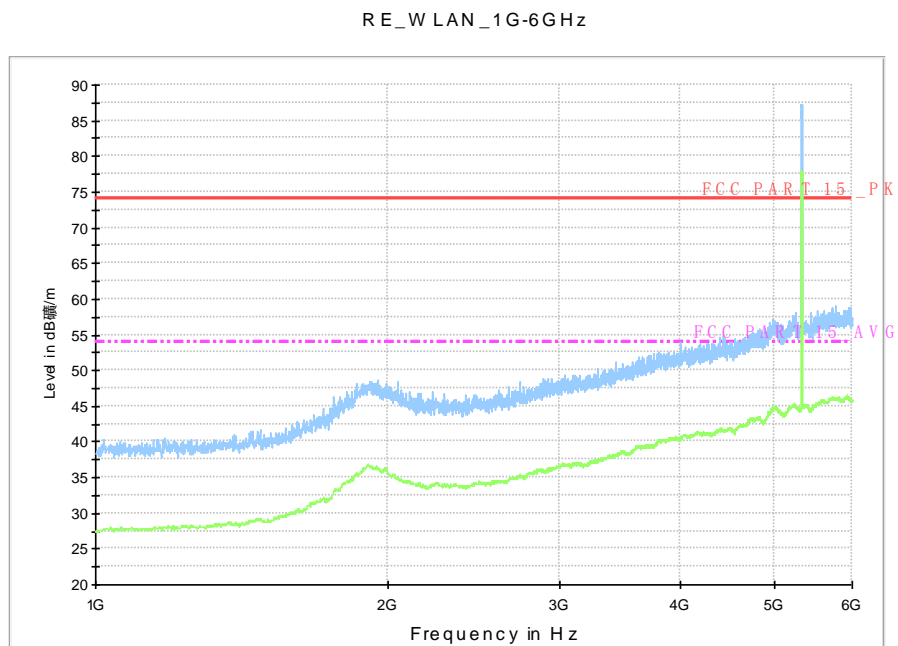


Fig. 66 Radiated Spurious Emission (802.11a, ch64, 1 GHz-6 GHz)

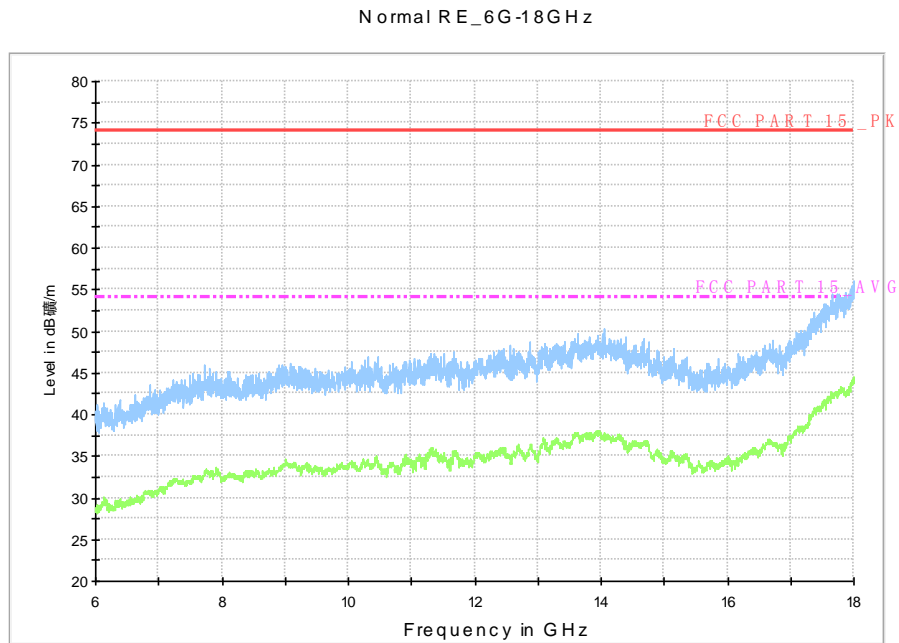


Fig. 67 Radiated Spurious Emission (802.11a, ch64, 6 GHz-18 GHz)

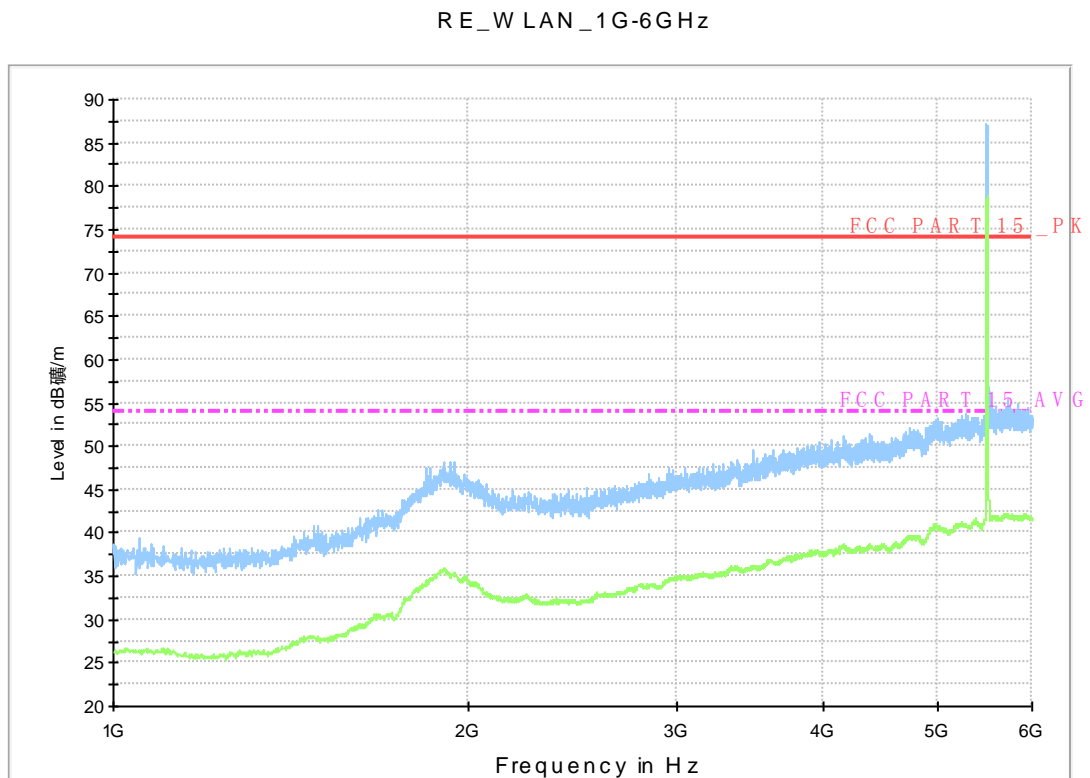


Fig. 68 Radiated Spurious Emission (802.11a, ch100, 1 GHz-6 GHz)

Normal RE_6G-18GHz

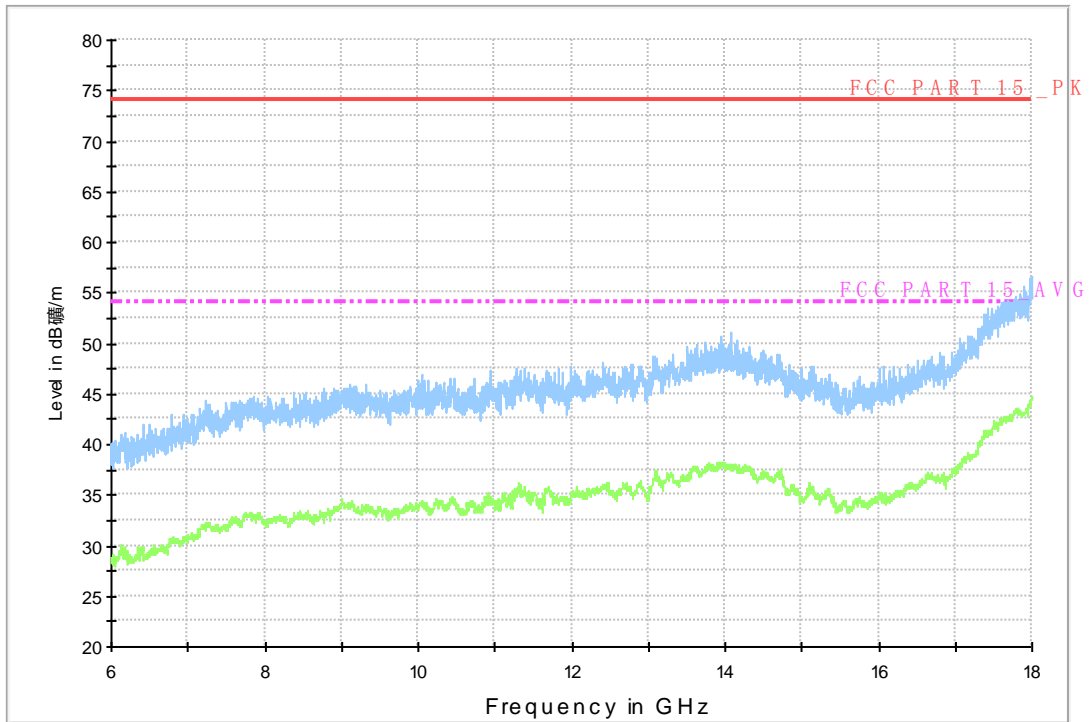


Fig. 69 Radiated Spurious Emission (802.11a, ch100, 6 GHz-18 GHz)

Normal RE_30M-1GHz_10m

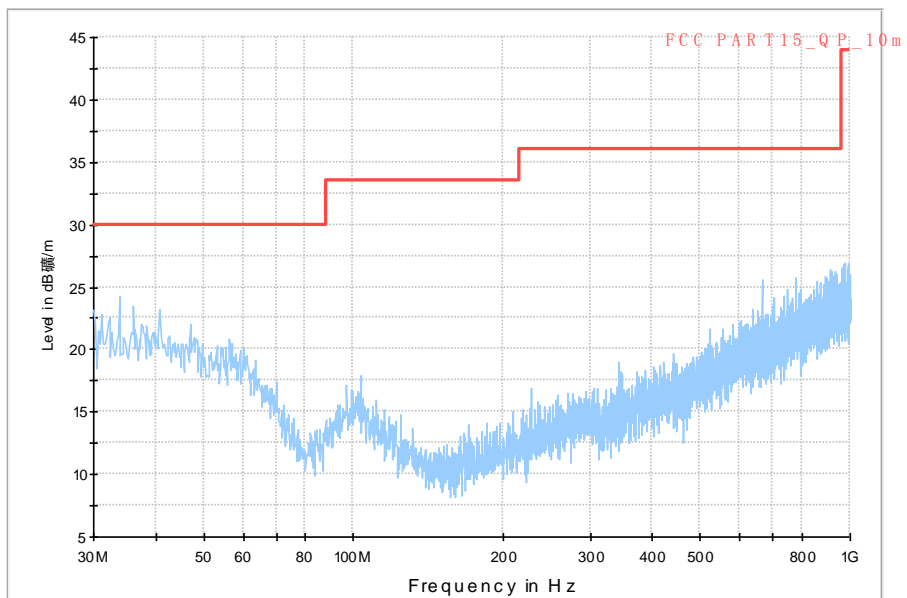


Fig. 70 Radiated Spurious Emission (802.11a, ch120, 30 MHz-1 GHz)

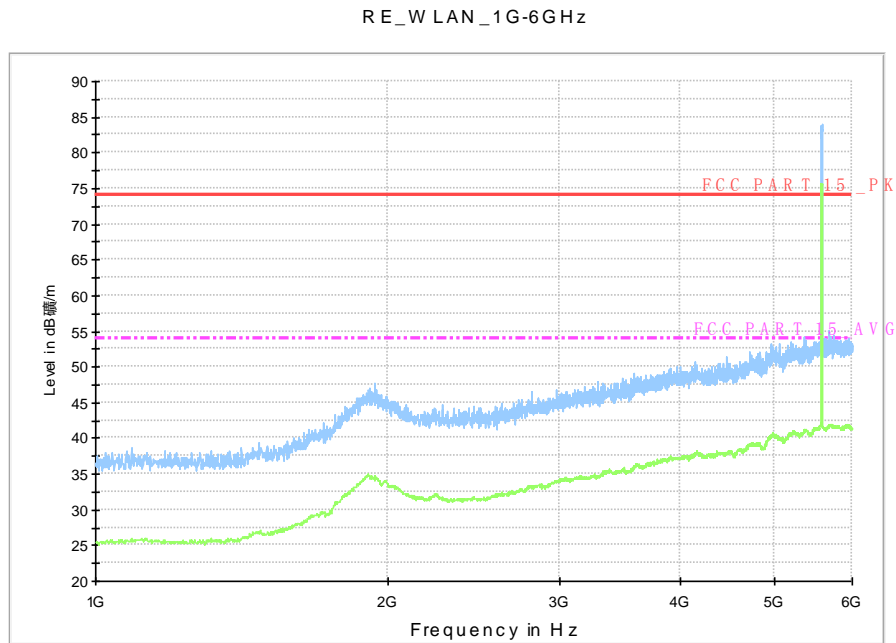


Fig. 71 Radiated Spurious Emission (802.11a, ch120, 1 GHz-6 GHz)

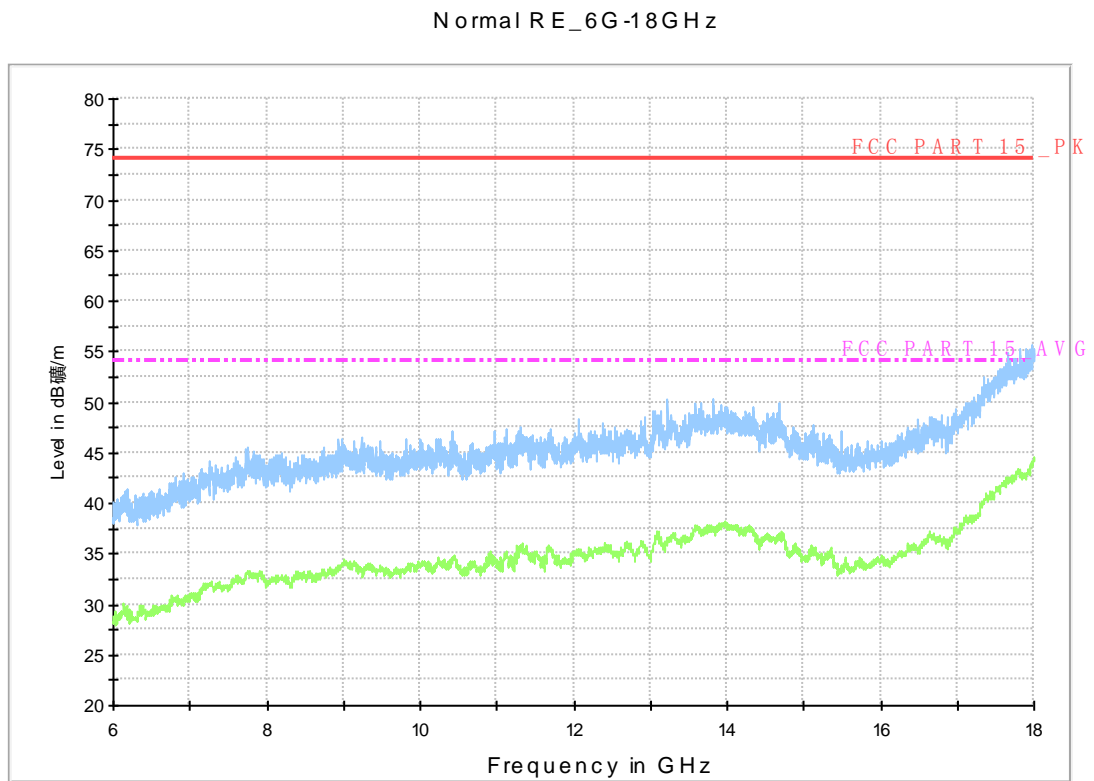


Fig. 72 Radiated Spurious Emission (802.11a, ch120, 6 GHz-18 GHz)

Normal RE_18G-26.5GHz

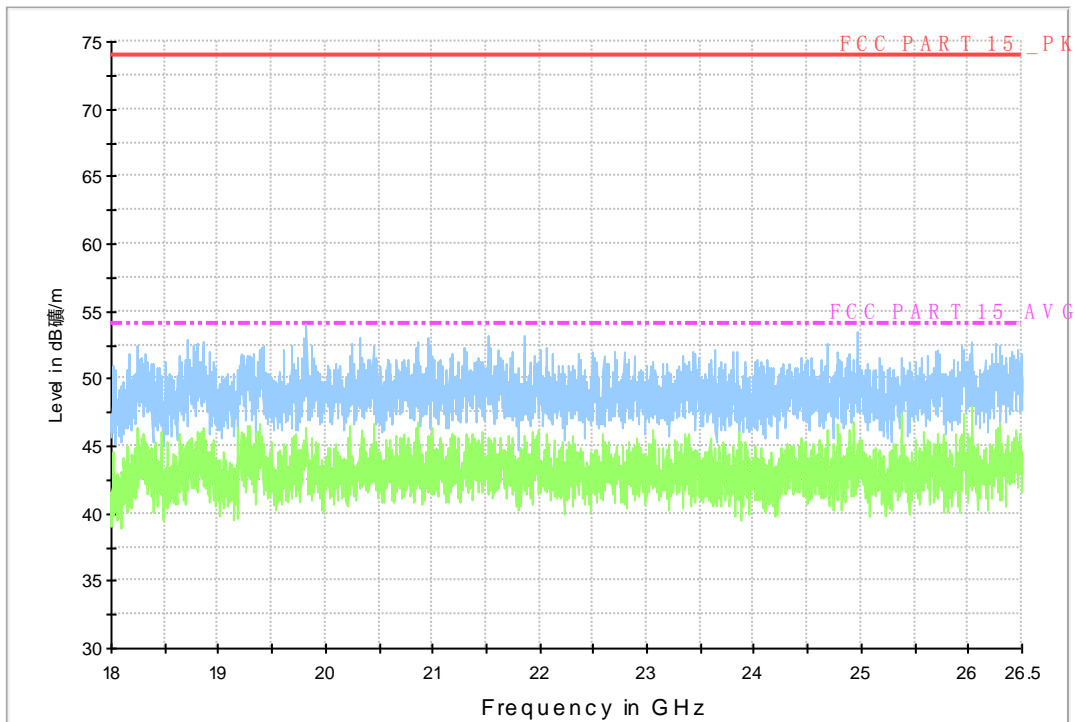


Fig. 73 Radiated Spurious Emission (802.11a, ch120, 18 GHz-26.5 GHz)

Normal RE_26.5G-40GHz

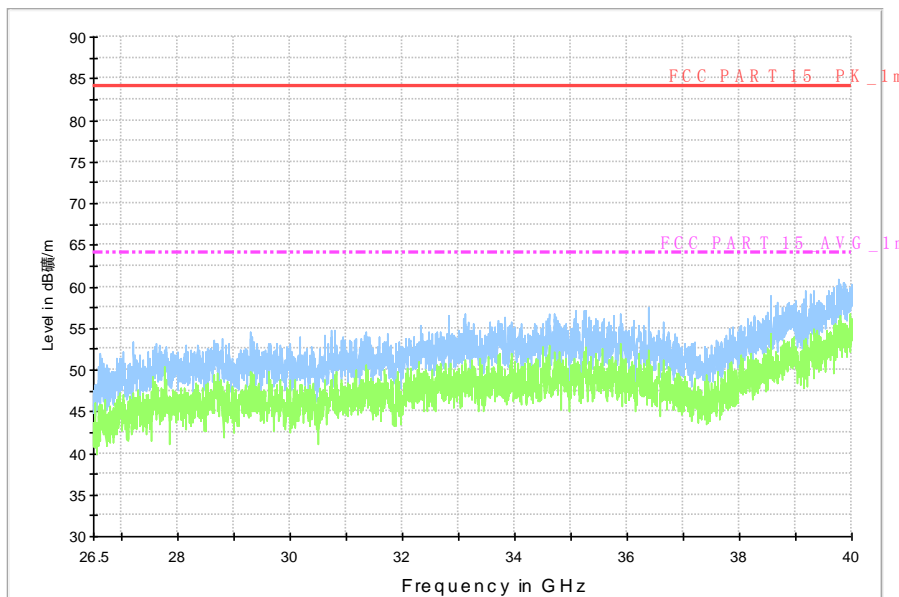


Fig. 74 Radiated Spurious Emission (802.11a, ch120, 26.5 GHz-40 GHz)

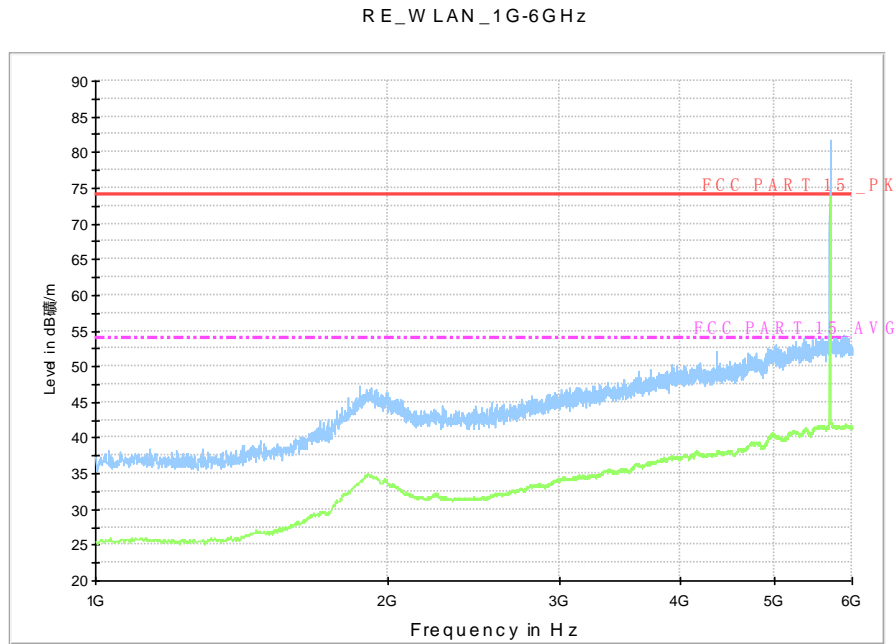


Fig. 75 Radiated Spurious Emission (802.11a, ch140, 1 GHz-6 GHz)

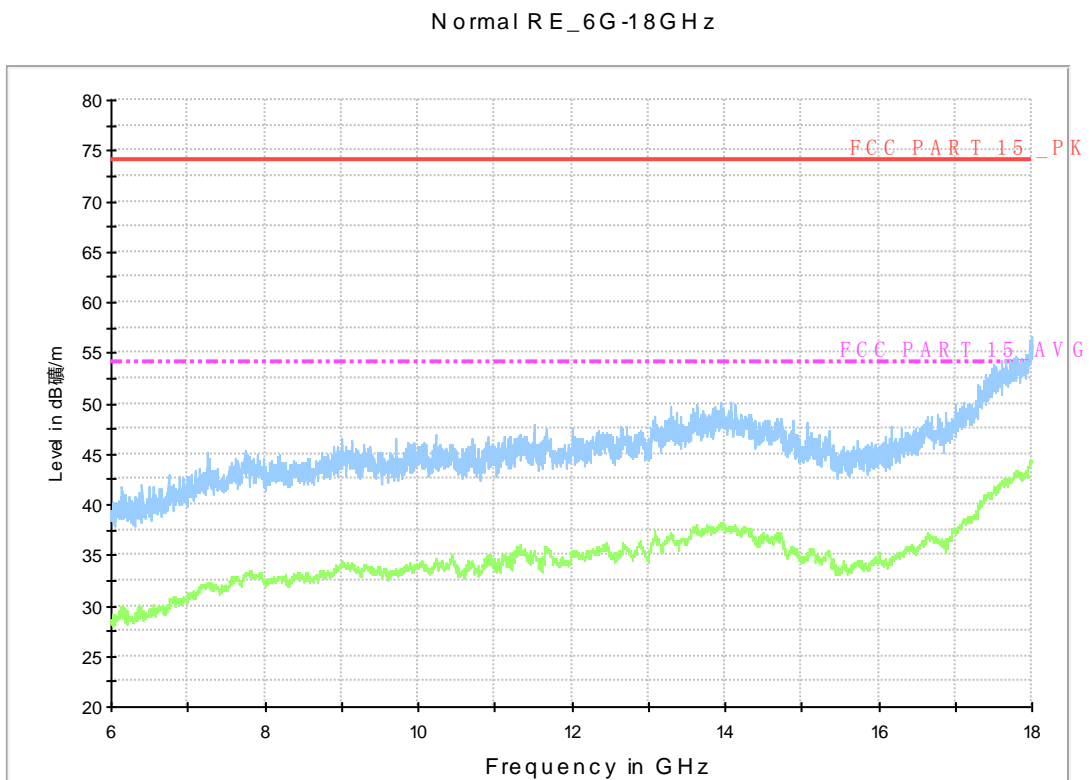


Fig. 76 Radiated Spurious Emission (802.11a, ch140, 6 GHz-18 GHz)

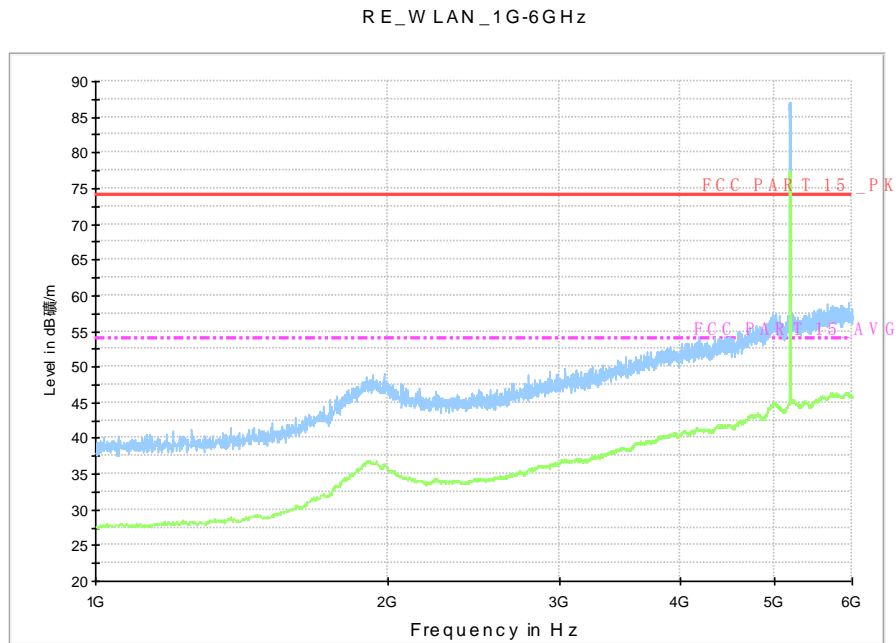


Fig. 77 Radiated Spurious Emission (802.11n-HT20, ch36, 1 GHz-6 GHz)

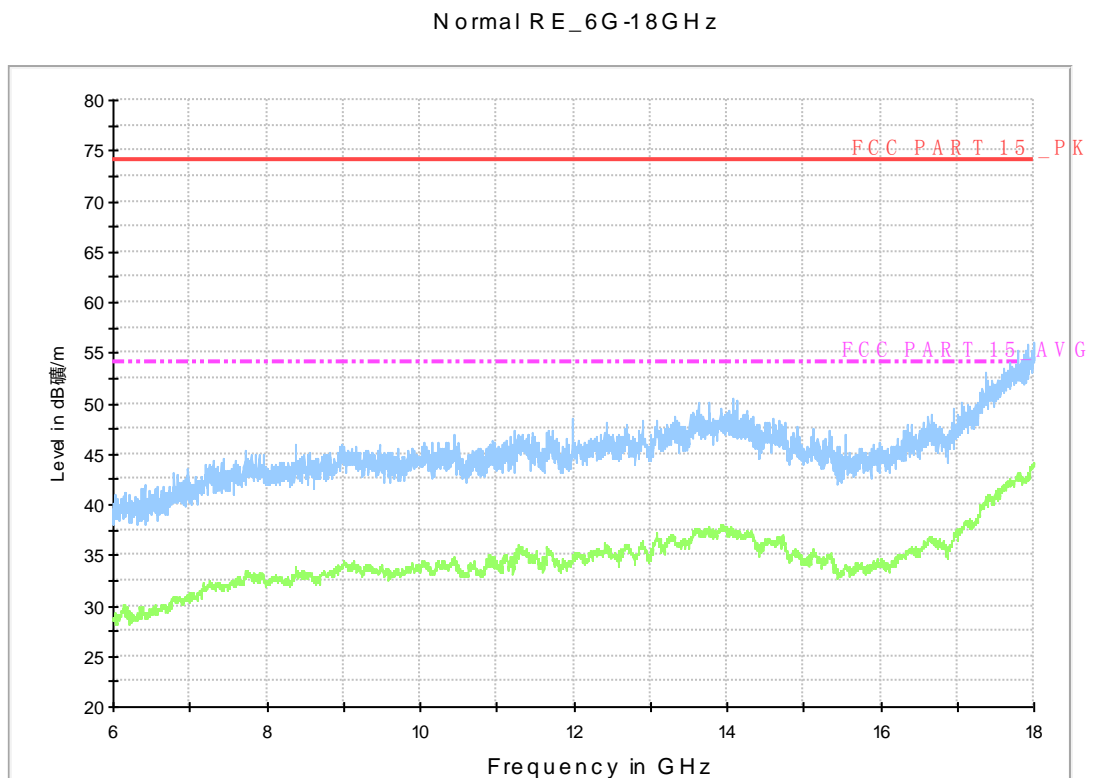


Fig. 78 Radiated Spurious Emission (802.11n-HT20, ch36, 6 GHz-18 GHz)

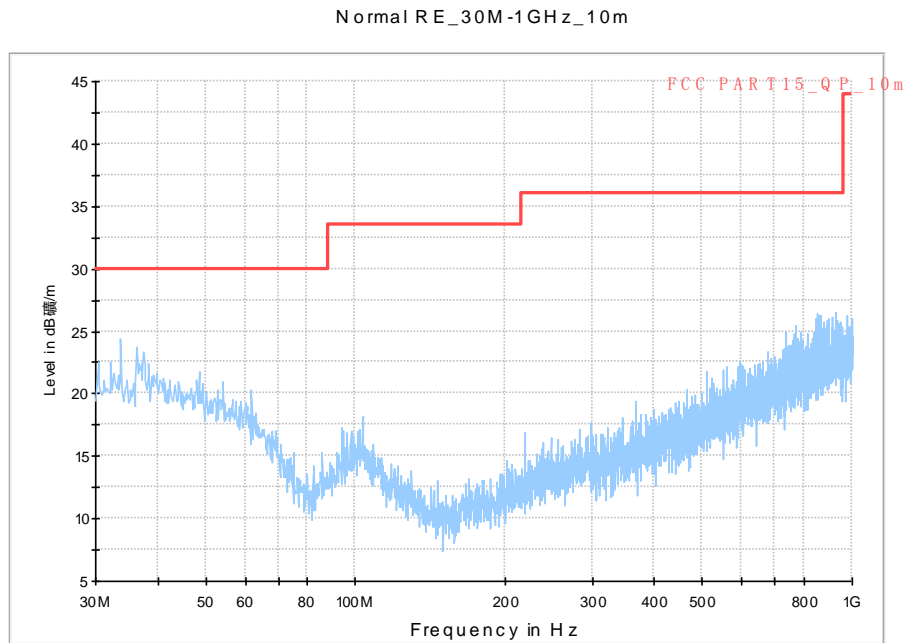


Fig. 79 Radiated Spurious Emission (802.11n-HT20, ch40, 30 MHz-1 GHz)

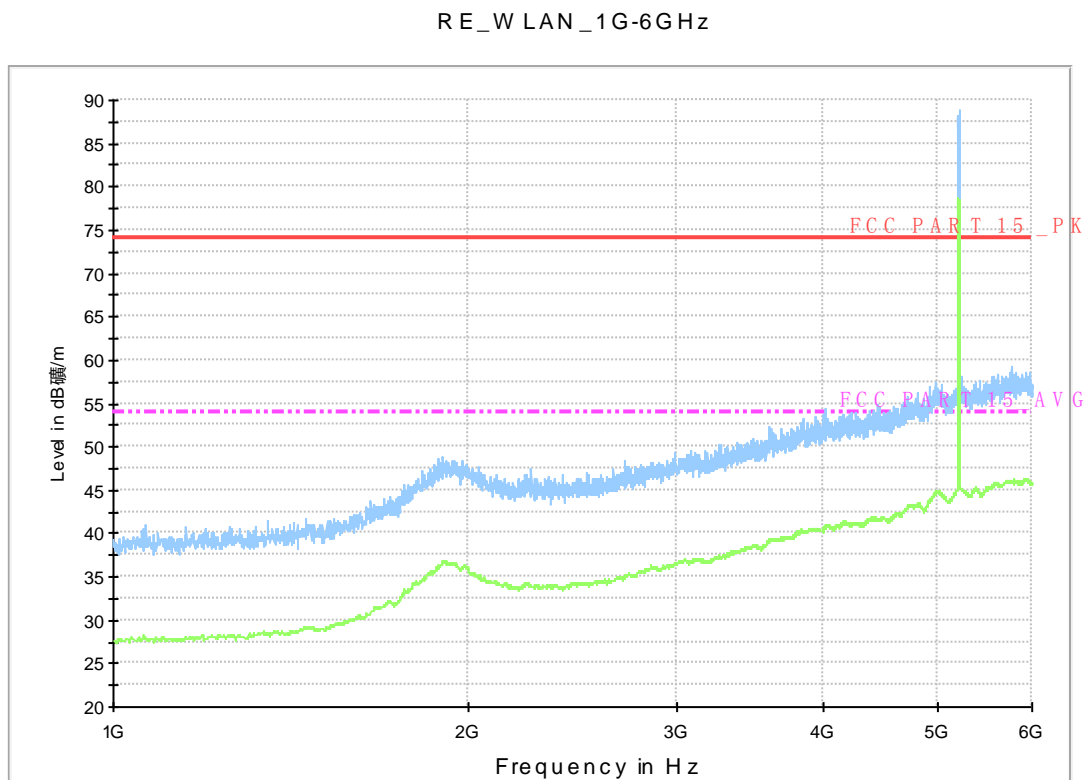


Fig. 80 Radiated Spurious Emission (802.11n-HT20, ch40, 1 GHz-6 GHz)

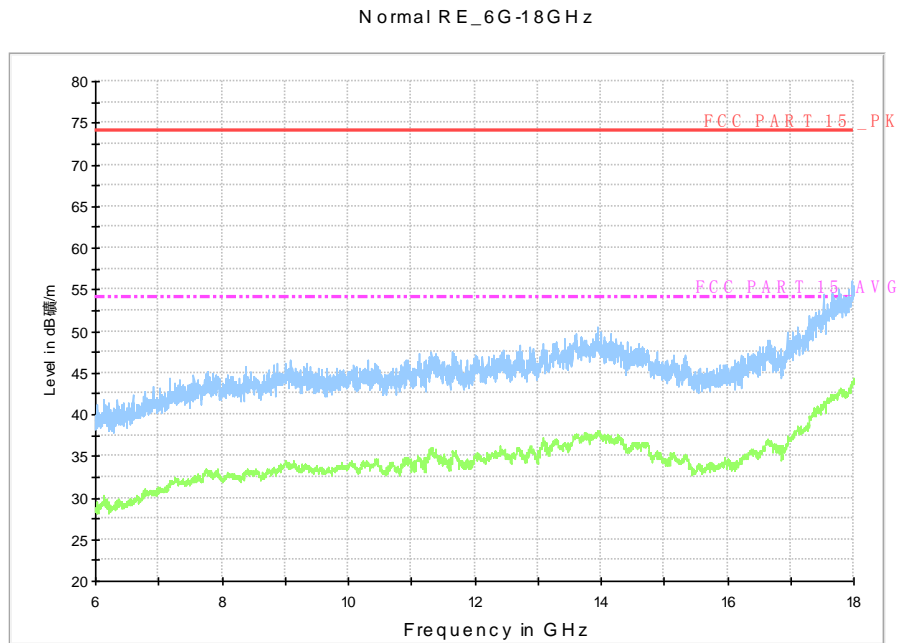


Fig. 81 Radiated Spurious Emission (802.11n-HT20, ch40, 6 GHz-18 GHz)

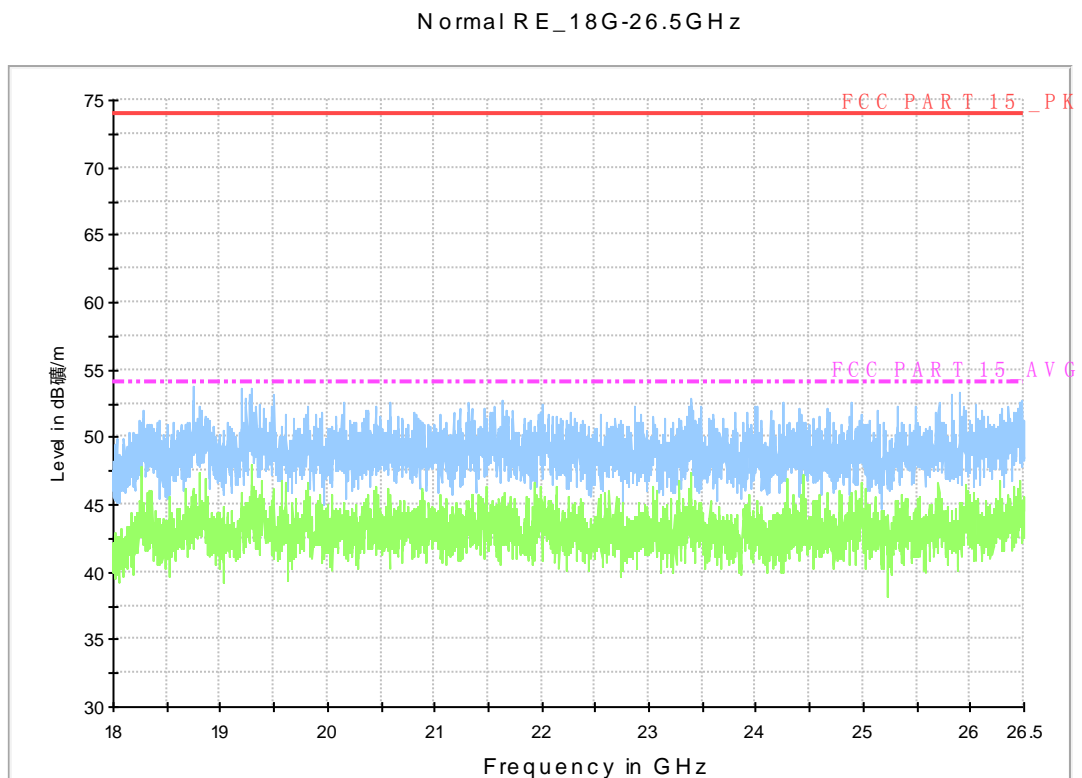


Fig. 82 Radiated Spurious Emission (802.11n-HT20, ch40, 18 GHz-26.5 GHz)