



# The Photos of SAR test

No. I14Z45690-SEM01

For

**TCT Mobile Limited**

**HSUPA/HSDPA+/UMTS triband/GSM quad-band mobile phone**

**Mode Name: Yaris 4 ULC**

**Marketing Name: 4032E**

With

**Hardware Version: PIO**

**Software Version: vE71**

**FCC ID: RAD498**

**Issued Date: 2014-04-15**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of MIIT


No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. [www.emcite.com](http://www.emcite.com)


©Copyright. All rights reserved by TMC Beijing.




**Picture 1: Constituents of the sample**

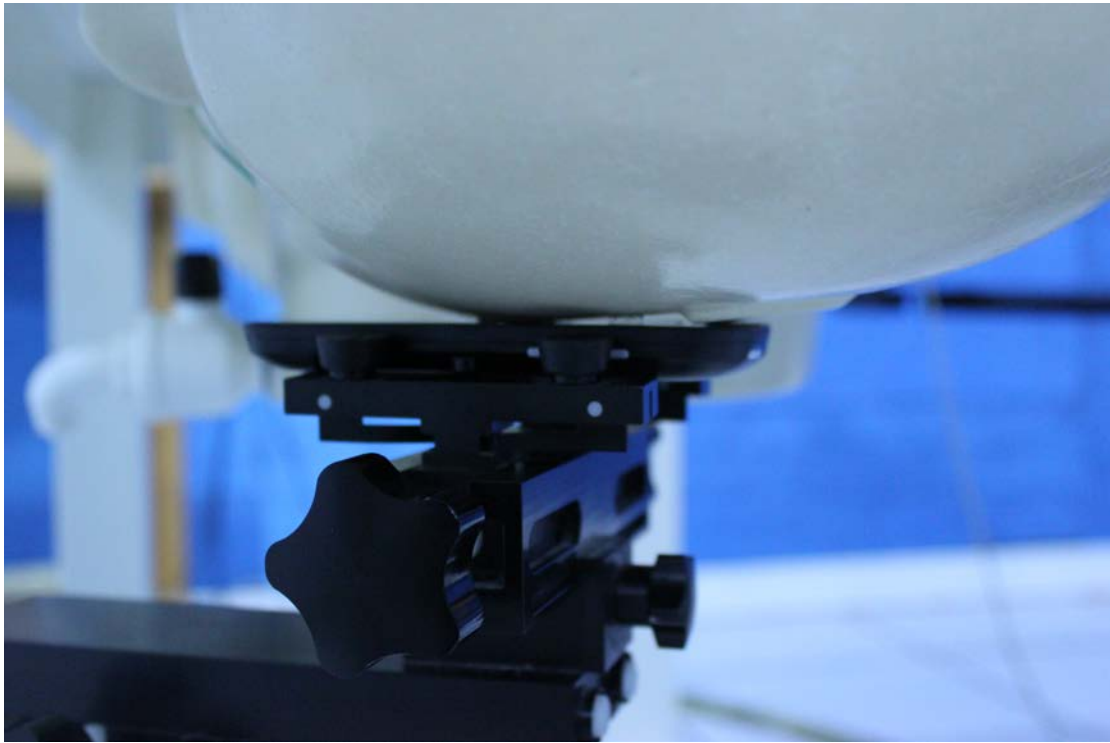


**Picture 2: Left Hand Touch Cheek Position**

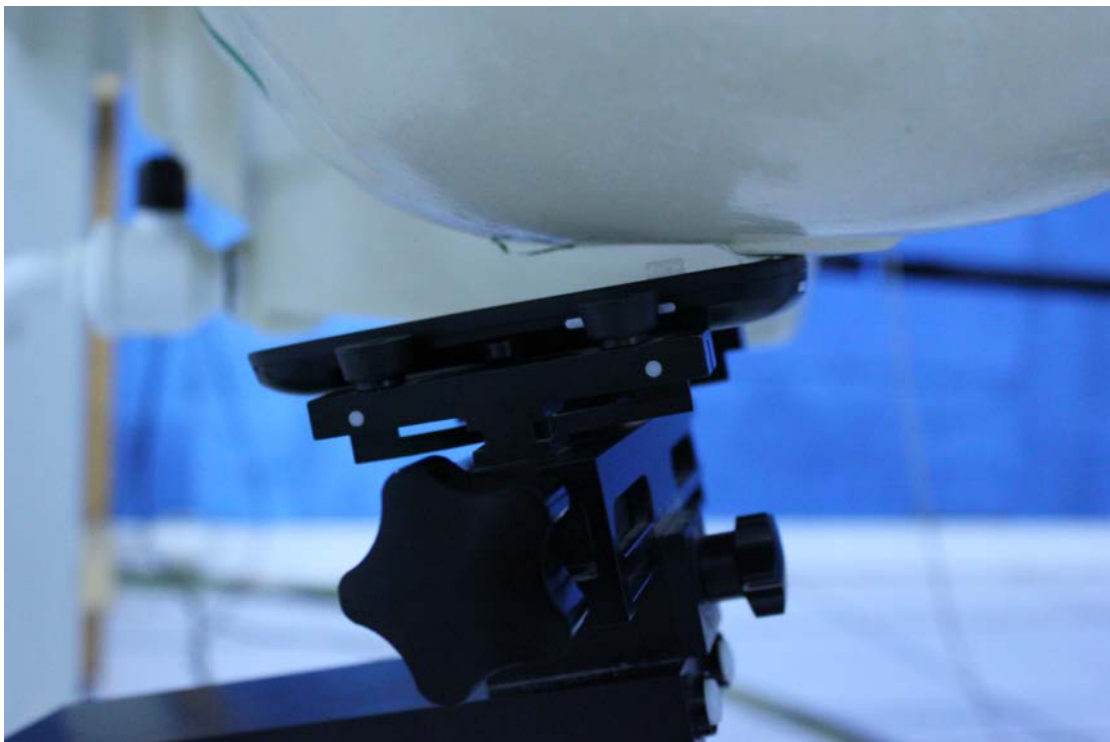

**Picture 3: Left Hand Tilt 15° Position**

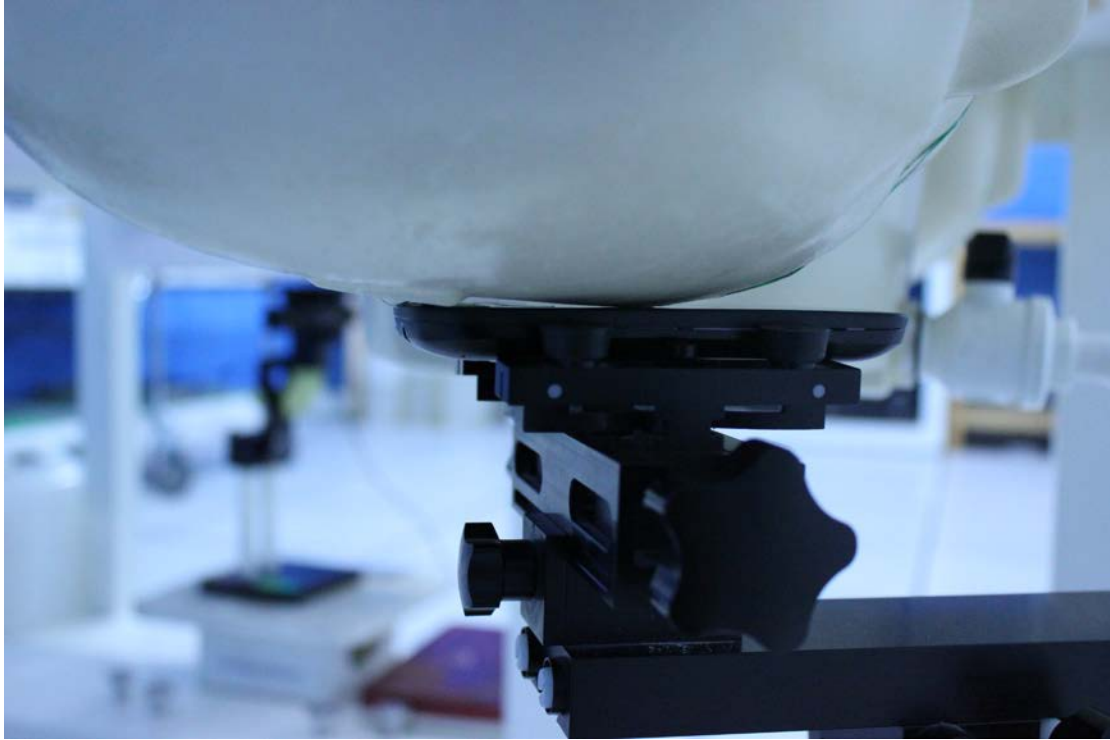



**Picture 4: Right Hand Touch Cheek Position**

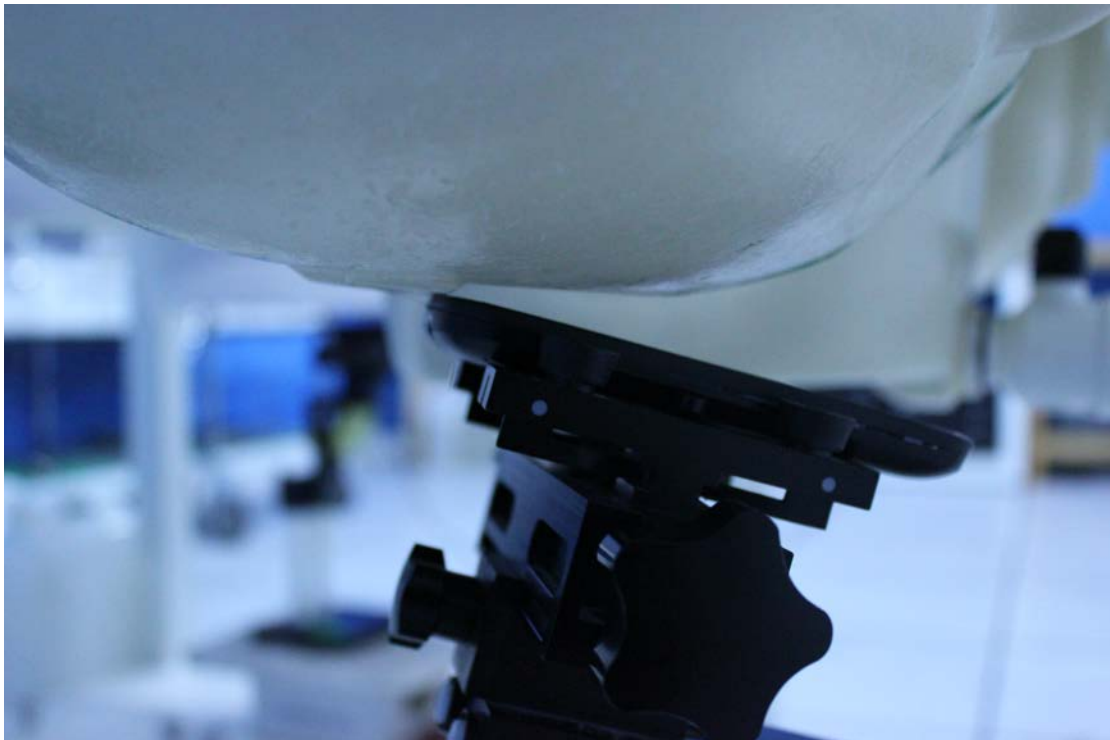


**Picture 5: Right Hand Tilt 15° Position**

**Test positions for body:**



The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

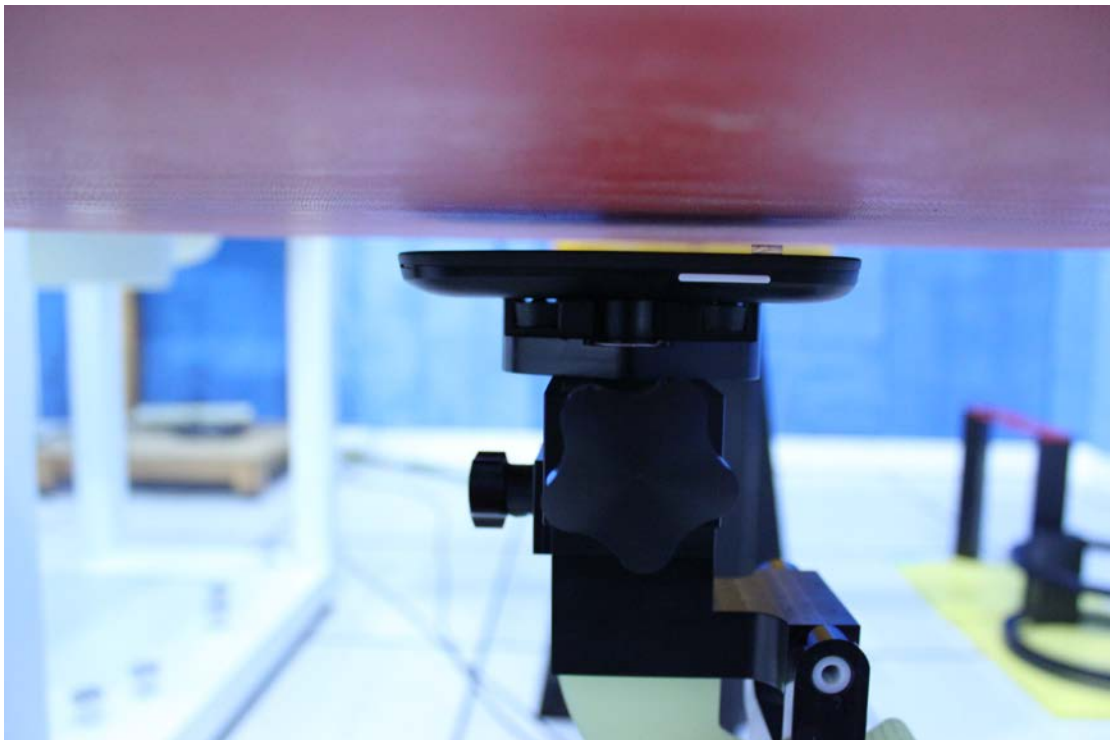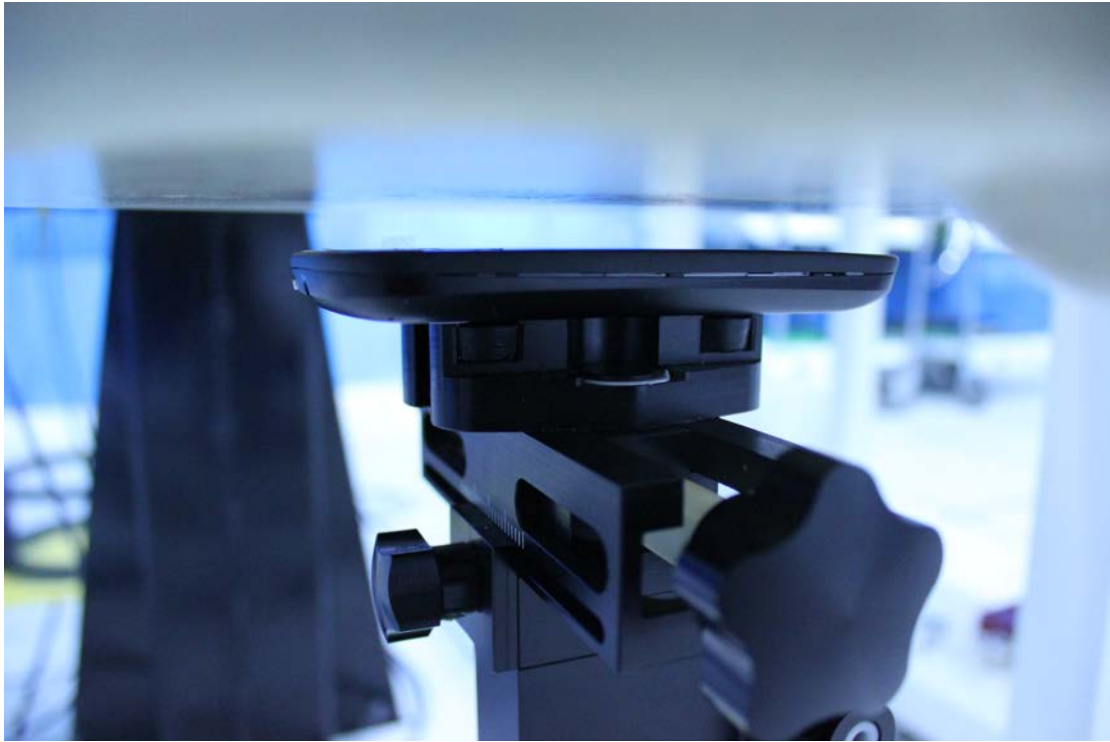


**Picture 6: Front**

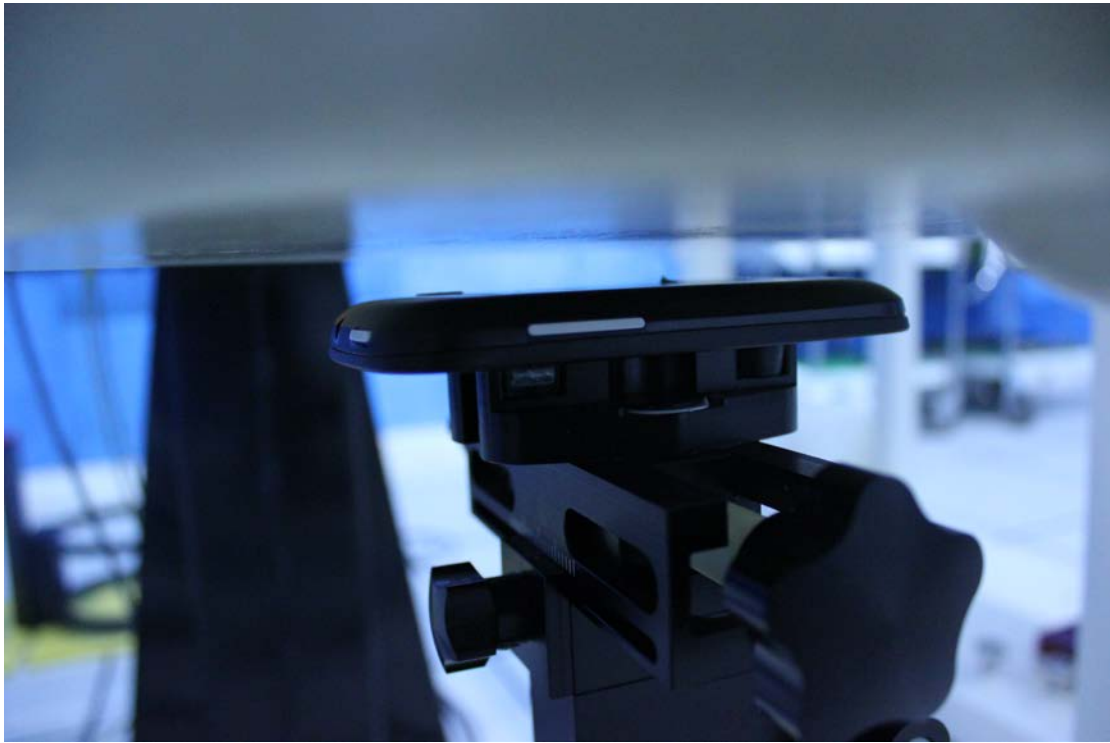

Picture 7: Rear

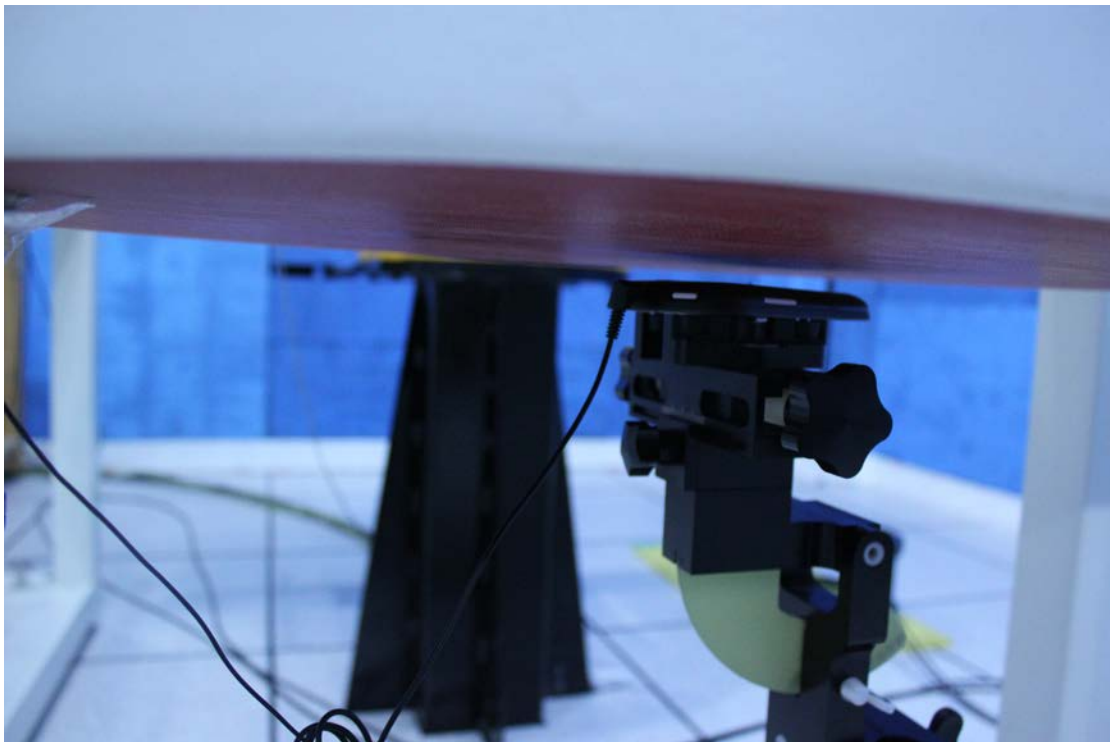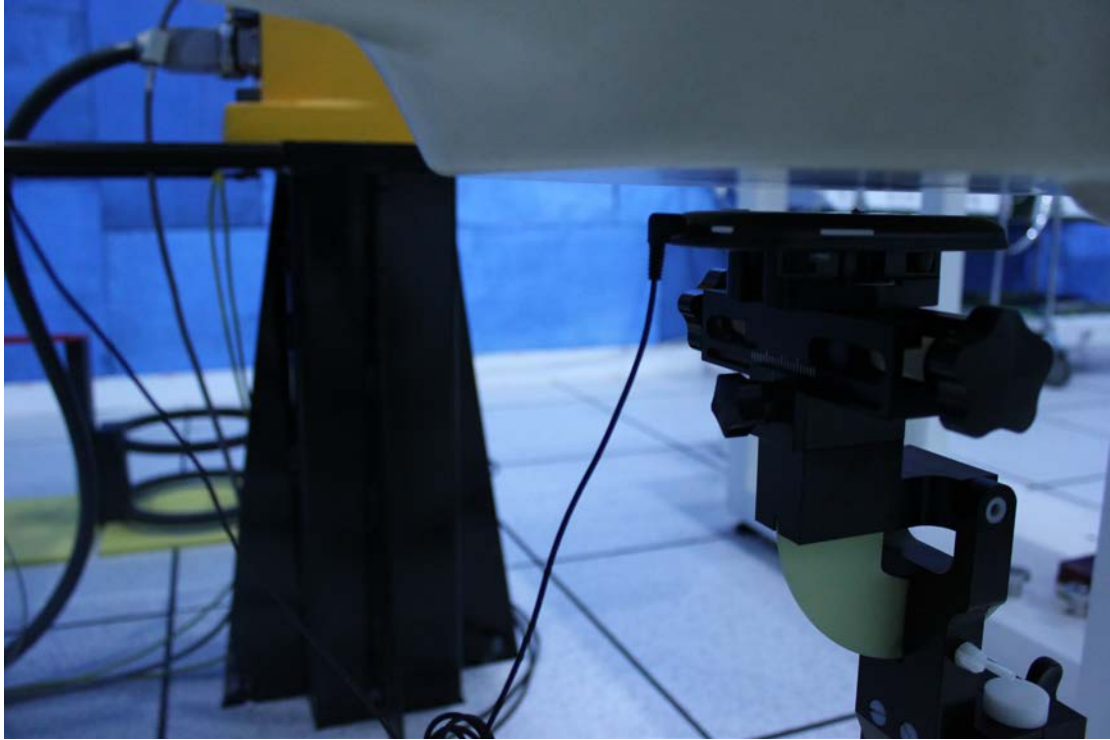


**Picture 7-1: Rear with Headset**

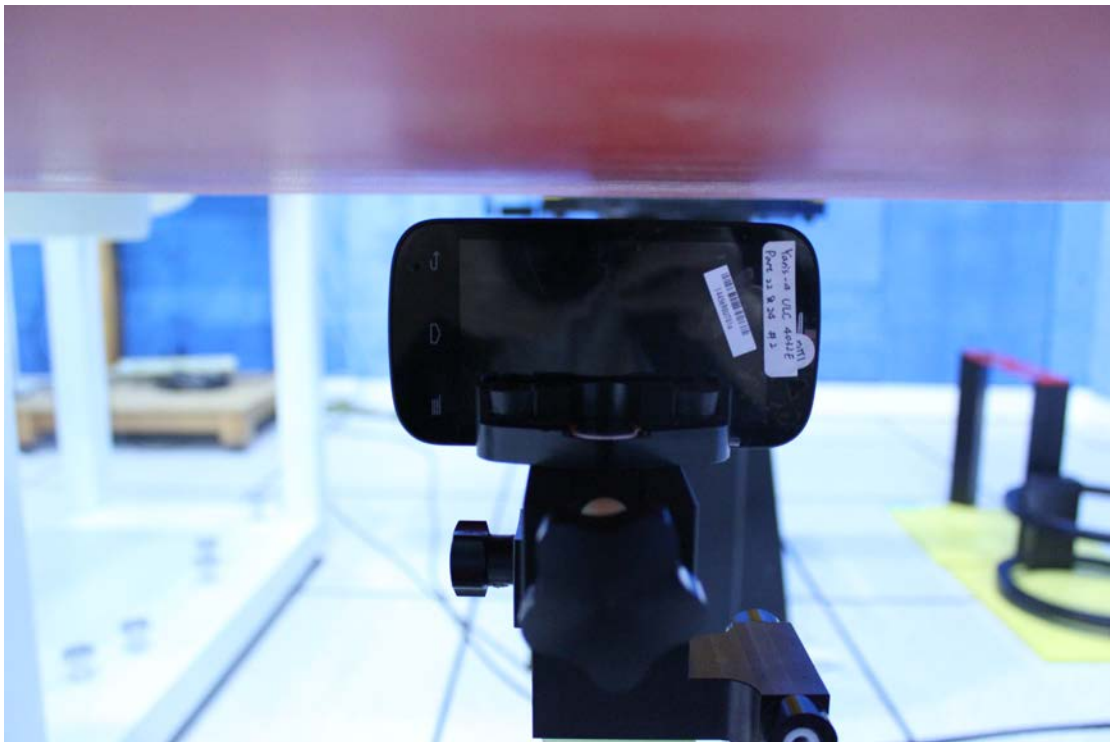


Picture 8: Left Edge




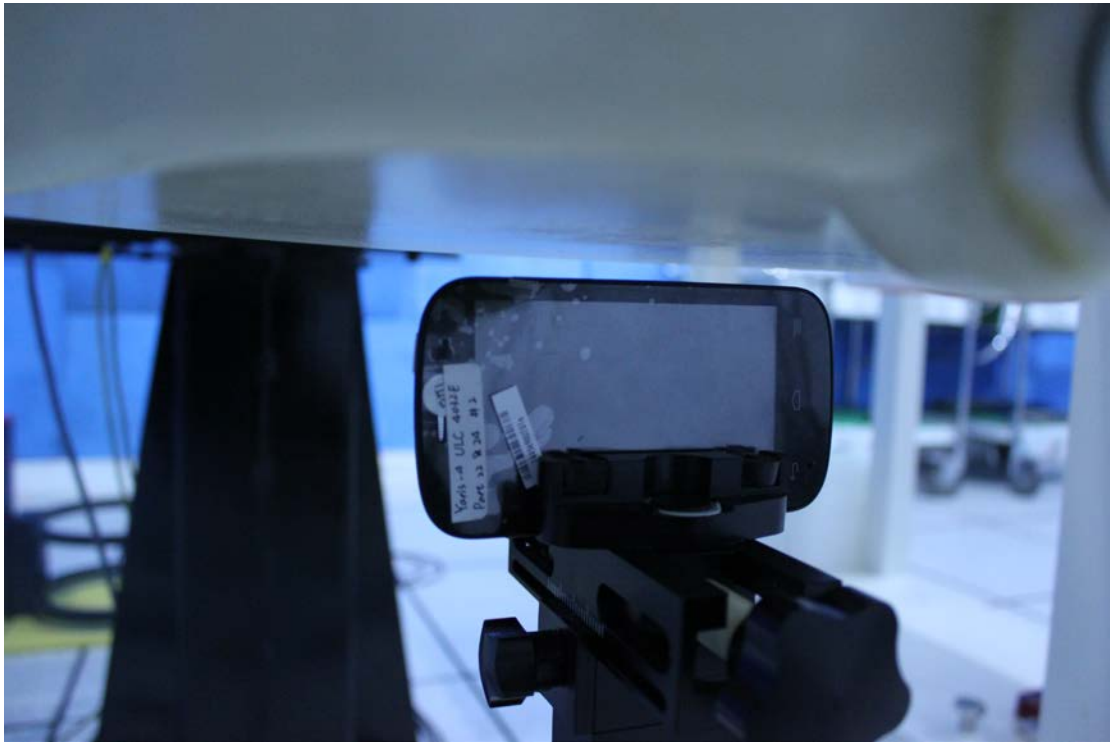

Picture 9: Right Edge

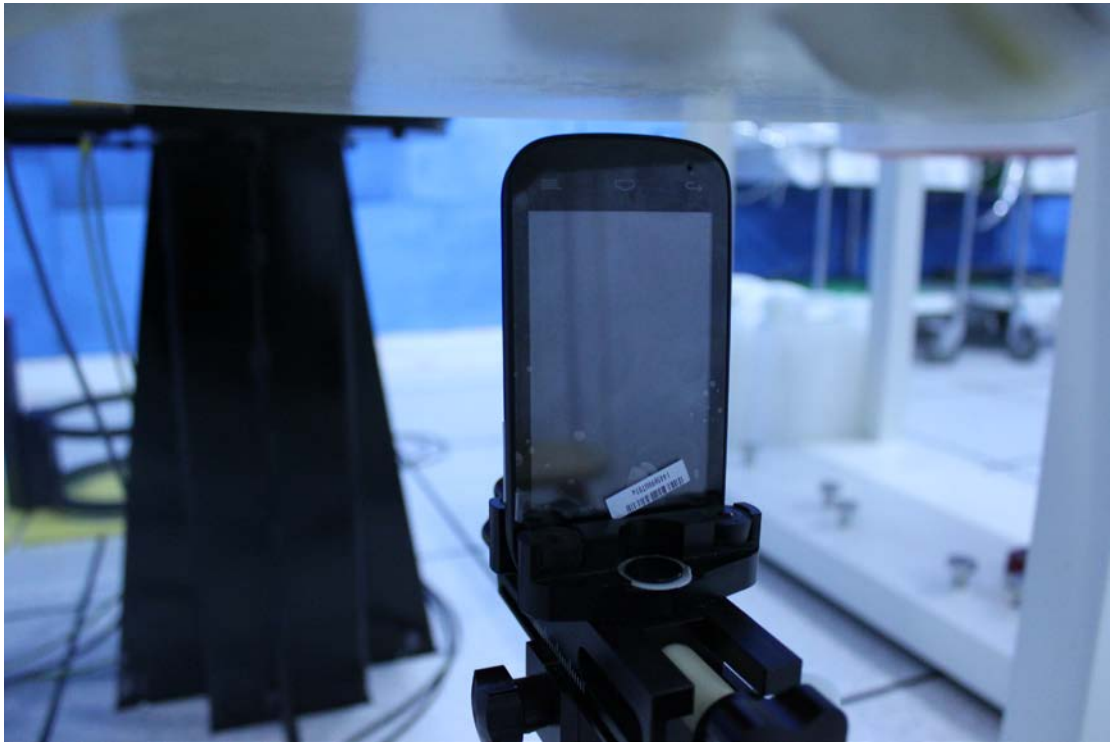

Picture 10: Bottom Edge

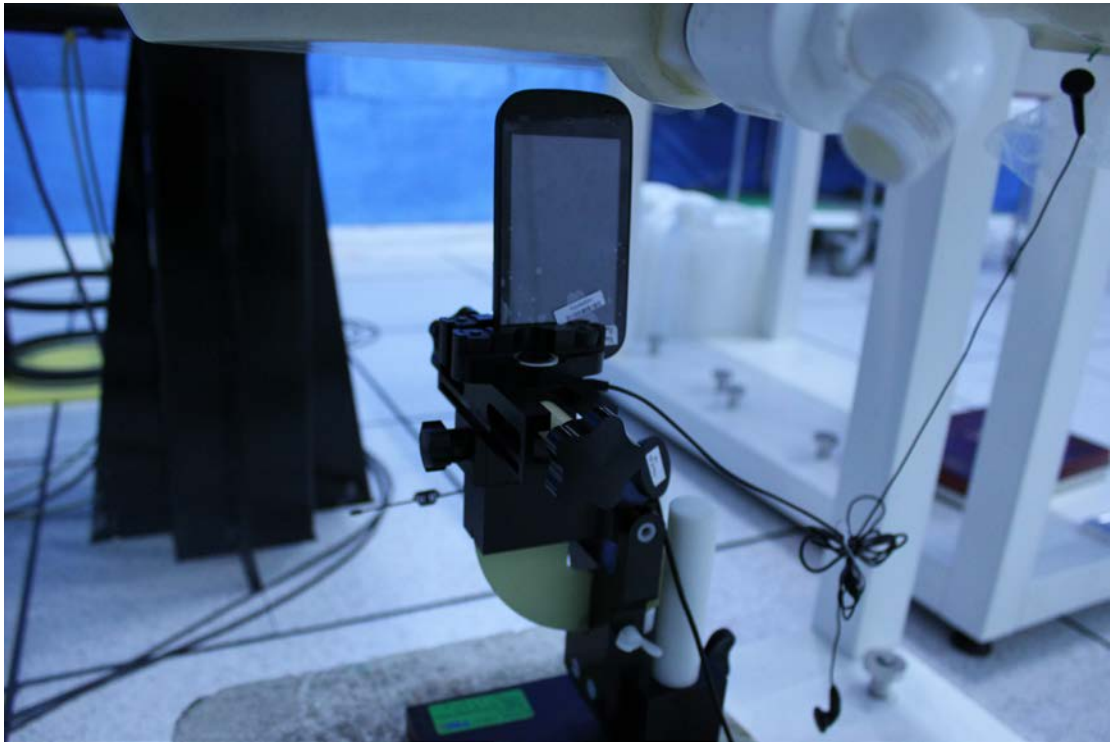

**Picture 10-1: Bottom Edge with Headset**



**Picture 11: Top Edge**