



**FCC PART 15C
TEST REPORT
No. I14Z45965-GTE04**

for

TCT Mobile Limited

**HSDPA/HSUPA/HSPA+/UMTS Quad bands / GSM quad bands/LTE 5
bands mobile phone**

Model Name: EOS 4G BELL

Marketing Name: 6050A

FCC ID: RAD500

IC No. : 9238A-0034

Hardware Version: 02

Software Version: 7D1Q

Issued Date: 2014-06-18



DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. NORMAL ACCESSORY SETTING.....	6
3.5. GENERAL DESCRIPTION.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS.....	9
6.2. STATEMENTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1. MEASUREMENT METHOD	11
A.2. PEAK OUTPUT POWER - CONDUCTED	12
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	13
A.4. CONDUCTED EMISSION.....	20
A.5. RADIATED EMISSION.....	45
A.6. TIME OF OCCUPANCY (DWELL TIME)	64
A.7. 20dB BANDWIDTH.....	74
A.8. CARRIER FREQUENCY SEPARATION	80
A.9. NUMBER OF HOPPING CHANNELS.....	82
A.10. AC POWERLINE CONDUCTED EMISSION.....	86
A.11. RECEIVER RADIATION EMISSION	89

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,
Beijing, P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Extreme Temperature: -20/+55°C
Relative Humidity: 20-75%

1.3. Project data

Project Leader: Zi Xiaogang
Testing Start Date: 2014-05-27
Testing End Date: 2014-06-18

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/HSUPA/HSPA+/UMTS Quad bands / GSM quad bands/LTE 5 bands mobile phone
Model Name	EOS 4G BELL
Marketing Name	6050A
FCC ID	RAD500
IC Number	9238A-0034
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT13a	014103000011706	02	7D1Q
UT19a	014103000011995	02	7D1Q

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	Inbuilt
AE2	Battery	/	Inbuilt
AE3	Travel charger	/	TCT-CHR-1011
AE4	USB cable	/	TCT-DC-0549
AE5	USB cable	/	/
AE1			
Model	CAB2000013C2		
Manufacturer	SCUD		
Capacitance	2150 mAh		
Nominal voltage	3.8 V		
AE2			
Model	CAB2000010C1		
Manufacturer	/		
Capacitance	/		
Nominal voltage	/		
AE3			
Model	CBA3000AG0C1		
Manufacturer	TEN PAO		
Length of cable	/		
AE4			

Model	CDA3122002C1
Manufacturer	JUWEI
Length of cable	102cm
AE5	
Model	CDA0000026C2
Manufacturer	Shenghua
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of HSDPA/HSUPA/HSPA+/UMTS Quad bands / GSM quad bands/LTE 5 bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	10-1-13
FCC Part15	15.209 Radiated emission limits, general requirements;	Edition
	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	
FCC Part 2	Frequency Allocations and Radio Treaty Matters;	10-1-13
	General Rules and Regulations	Edition
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	2009
	Spectrum Management and Telecommunications - Radio Standards Specification	
RSS - Gen	General Requirements and Information for the Certification of Radiocommunication Equipment	Issue3
RSS -210	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment	Issue8

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by TMC

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	IC	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	RSS-210 A8.4 (2)	P
Frequency Band Edges	15.247 (d)	RSS-210 A8.5	P
Conducted Emission	15.247 (d)	RSS-210 A8.5	P
Radiated Emission	15.247, 15.205, 15.209	RSS-210 A8.5	P
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	RSS-210 A8.1 (4)	P
20dB Bandwidth	15.247 (a)(1)	RSS-210 A8.1 (1)	NA
Carrier Frequency Separation	15.247 (a)(1)	RSS-210 A8.1 (2)	P
Number of hopping channels	15.247 (a)(b)(iii)	RSS-210 A8.1 (4)	P
AC Powerline Conducted Emission	15.107, 15.207	RSS-Gen 7.2.2	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

6.2. Statements

TMC has evaluated the test cases requested by the applicant /manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2015-06-11
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	2015-02-09

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2014-11-05
2	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2014-07-13
3	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	2014-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-30
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	2014-09-15
7	LISN	NV216	101200	R&S	2014-07-11
8	Loop Antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2014-12-12
9	Pre-amplifier(18GHz)	SCU18	1005277	Rohde & Schwarz	/
10	Pre-amplifier(26.5GHz)	SCU26	1006788	Rohde & Schwarz	/

Anechoic chamber

Fully anechoic chamber by Frankonia German.


ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

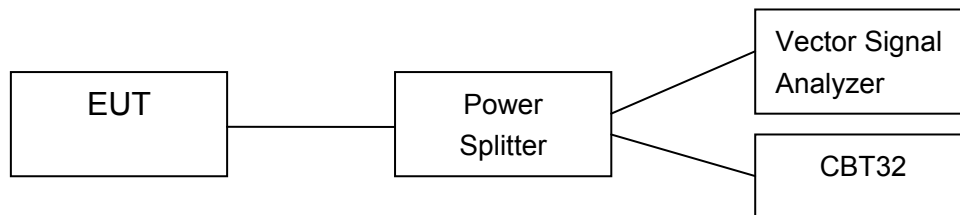

A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

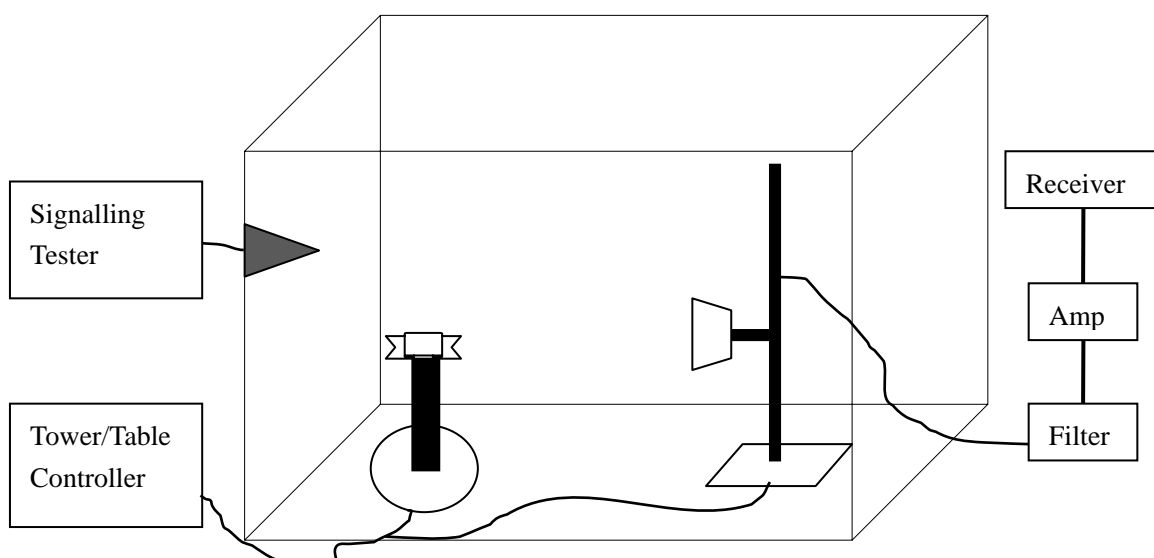

A.2. Peak Output Power - Conducted

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)/ / RSS-210 A8.4 (2)	< 30

The measurement is made according to ANSI C63.10.

Test Condition

Hopping Mode	RBW	VBW	Span	Sweeptime	Detector	Trace Mode
Hopping OFF	3MHz	3MHz	5MHz	2.5ms	Peak	Max Hold

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.53	6.00	5.37	P

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	4.60	6.08	5.37	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	5.06	6.55	5.83	P

Conclusion: PASS

A.3. Frequency Band Edges - Conducted

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) RSS-210 A8.4(2)	> 20

The measurement is made according to ANSI C63.10.

Test Condition

Hopping Mode	RBW	VBW	Span	Sweptime	Detector	Trace Mode
Hopping OFF/ON	100KHz	300KHz	10MHz	5ms	Peak	Max Hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-56.74	P
	Hopping ON	Fig.2	-57.72	P
78	Hopping OFF	Fig.3	-62.43	P
	Hopping ON	Fig.4	-62.79	P

For $\pi/4$ DQPSK


Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-55.84	P
	Hopping ON	Fig.6	-56.09	P
78	Hopping OFF	Fig.7	-61.06	P
	Hopping ON	Fig.8	-61.18	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-55.40	P
	Hopping ON	Fig.10	-55.30	P
78	Hopping OFF	Fig.11	-61.31	P
	Hopping ON	Fig.12	-58.74	P


Conclusion: PASS

Test graphs as below

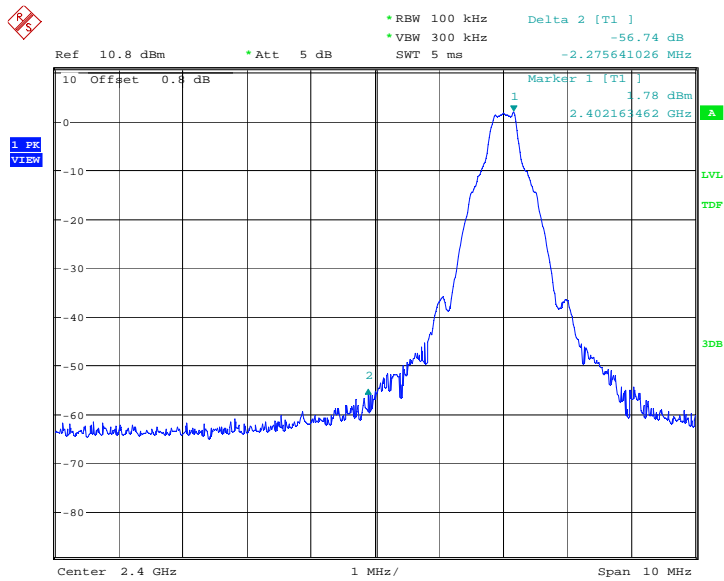


Date: 27.MAY.2014 11:10:59

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

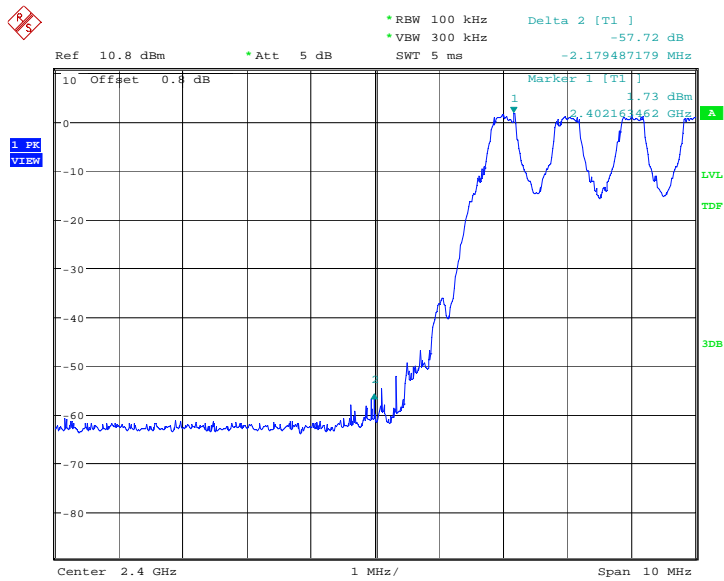


Date: 27.MAY.2014 11:13:19

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

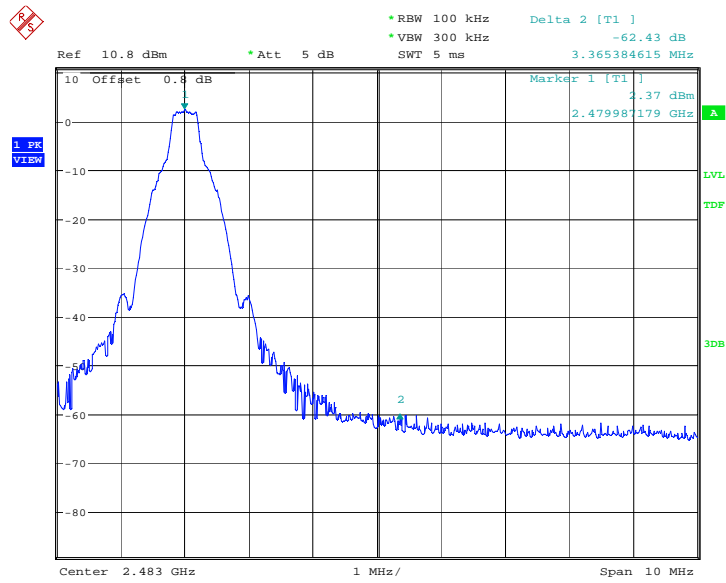


Date: 27.MAY.2014 11:11:17

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

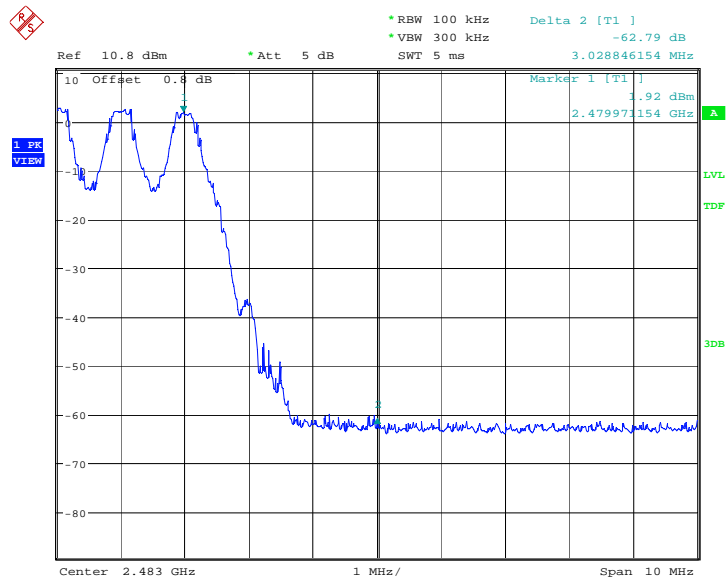


Date: 27.MAY.2014 11:15:22

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

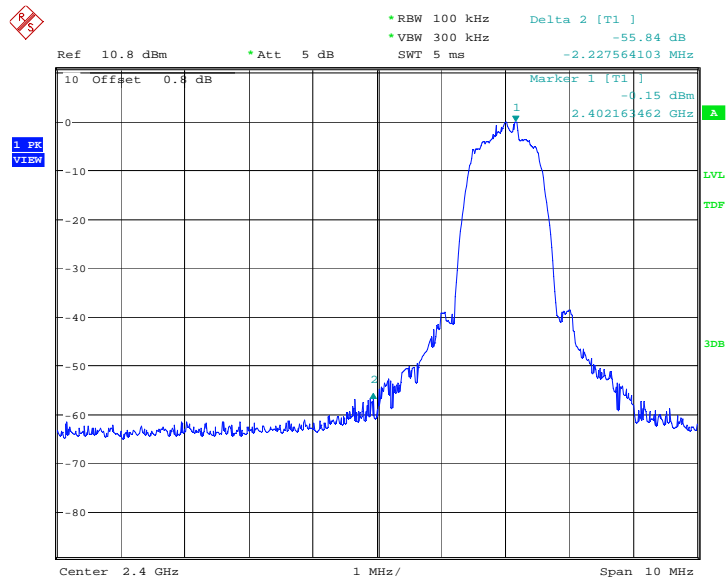


Date: 27.MAY.2014 11:32:31

Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

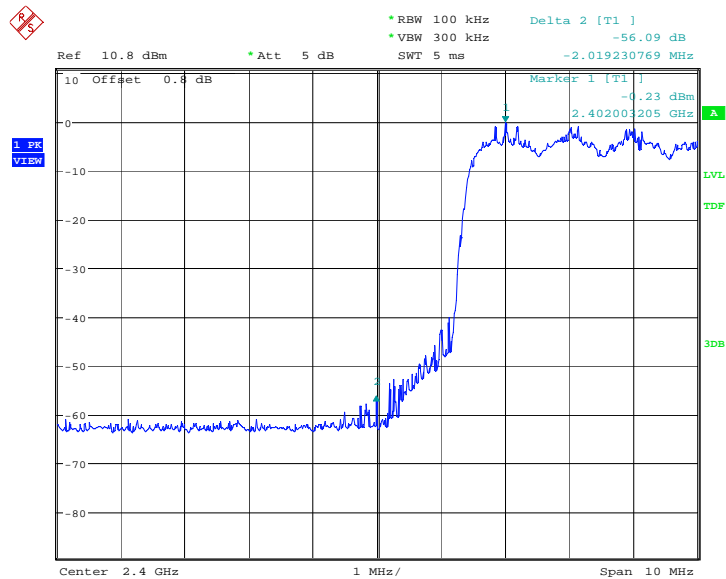


Date: 27.MAY.2014 11:34:50

Fig.6. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

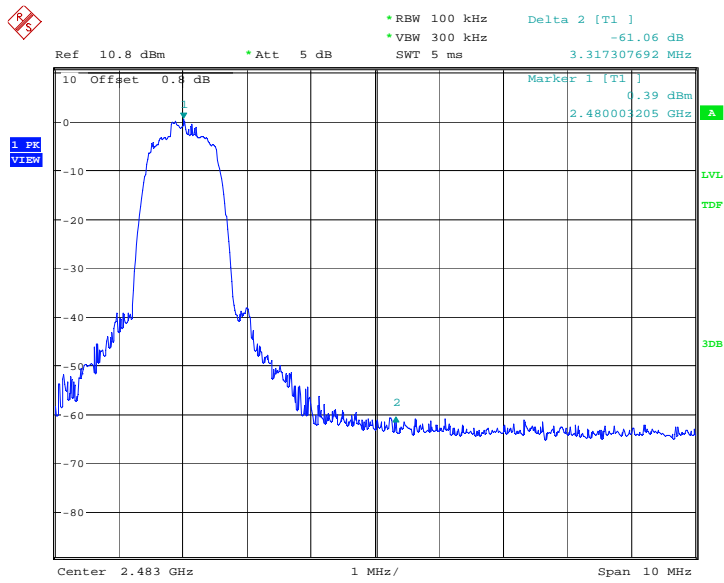


Date: 27.MAY.2014 11:32:48

Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

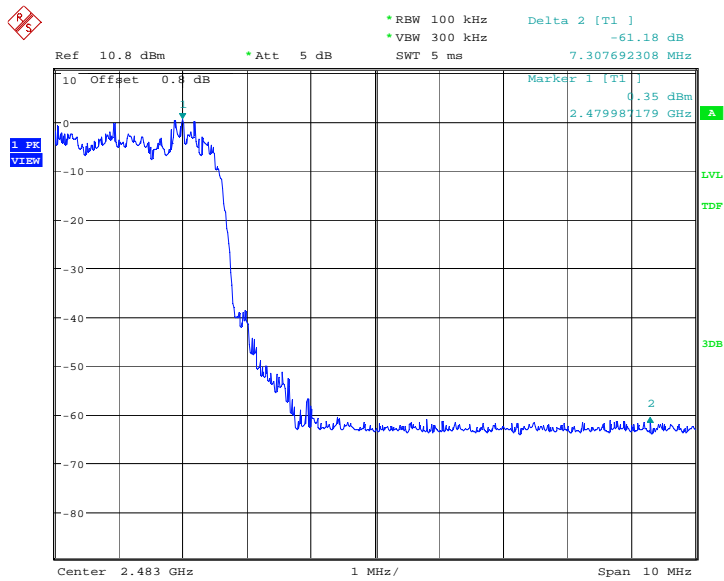


Date: 27.MAY.2014 11:36:53

Fig.8. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

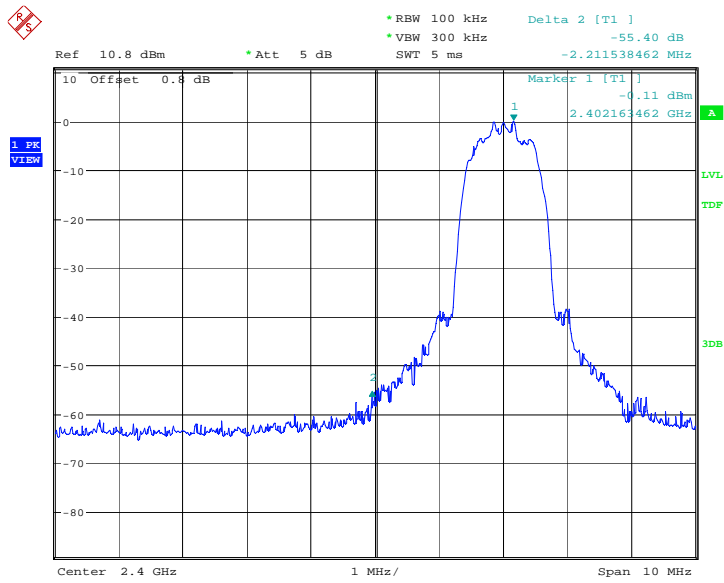


Date: 27.MAY.2014 11:54:01

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

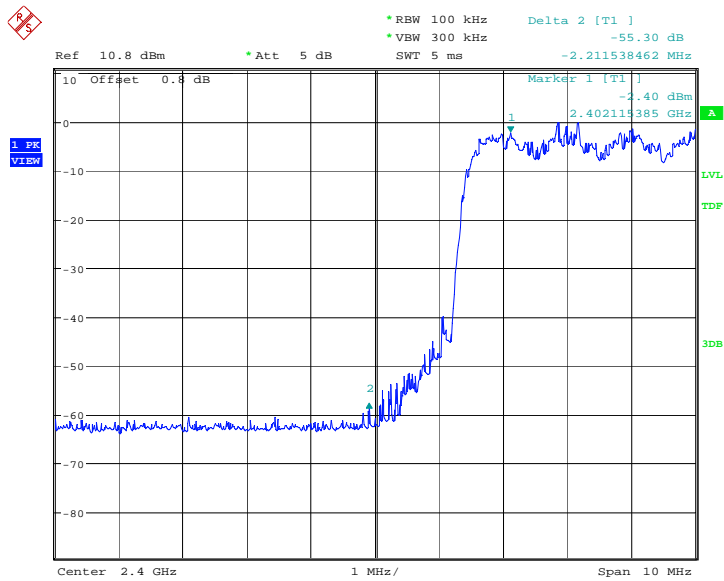


Date: 27.MAY.2014 11:56:20

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

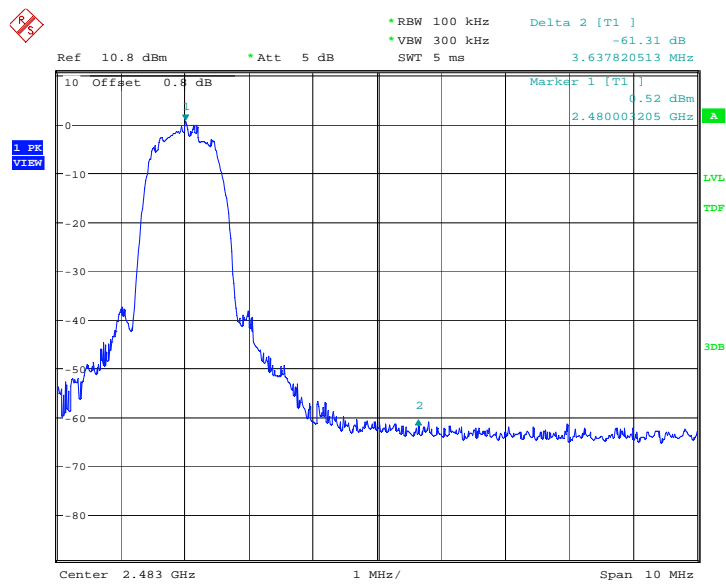

Date: 27.MAY.2014 11:54:18

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

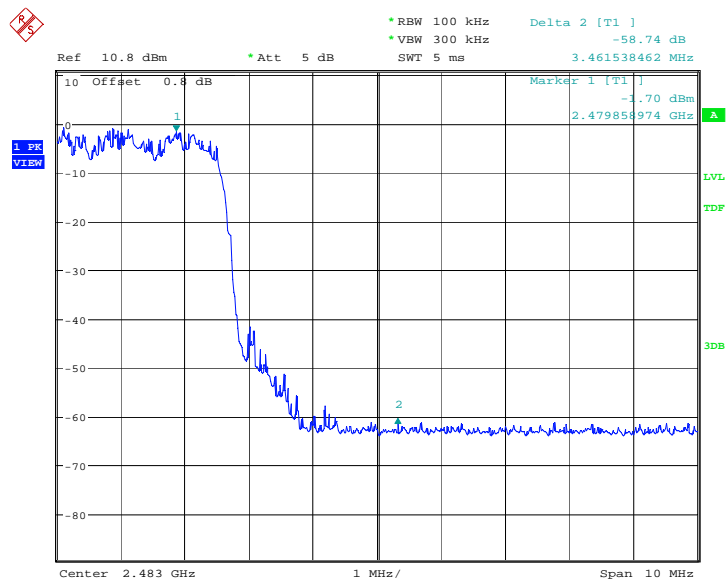

Date: 27.MAY.2014 11:58:23

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) RSS-210 A8.5	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.10

Test Condition

Hopping Mode	RBW	VBW	Sweeptime	Detector	Trace Mode
Hopping OFF	100KHz	300KHz	Auto	Peak	Max Hold

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P


For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P

	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P
Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P


Conclusion: PASS

Test graphs as below

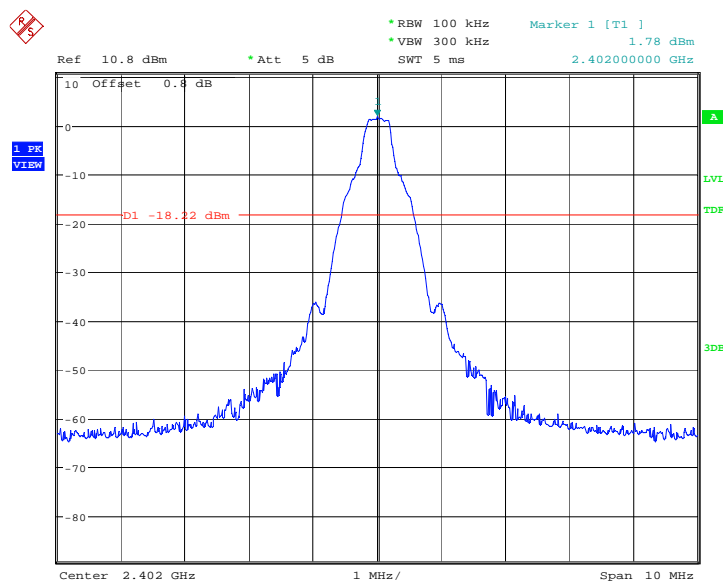


Date: 27.MAY.2014 11:15:41

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

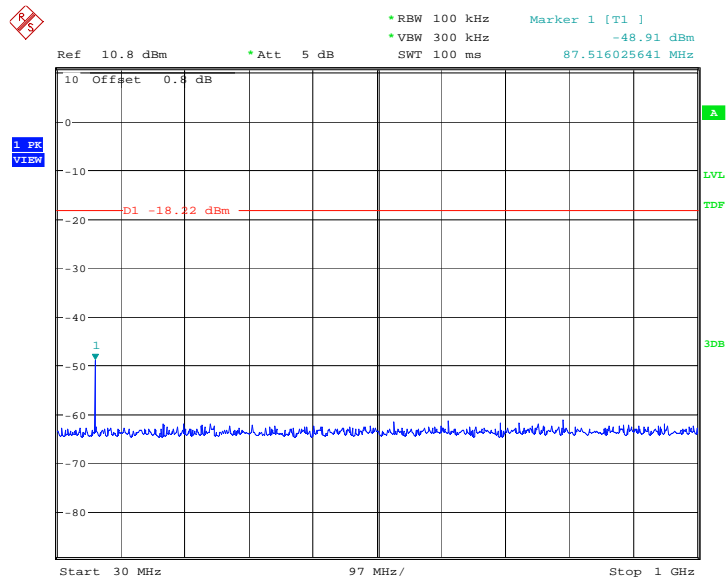


Date: 27.MAY.2014 11:15:57

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

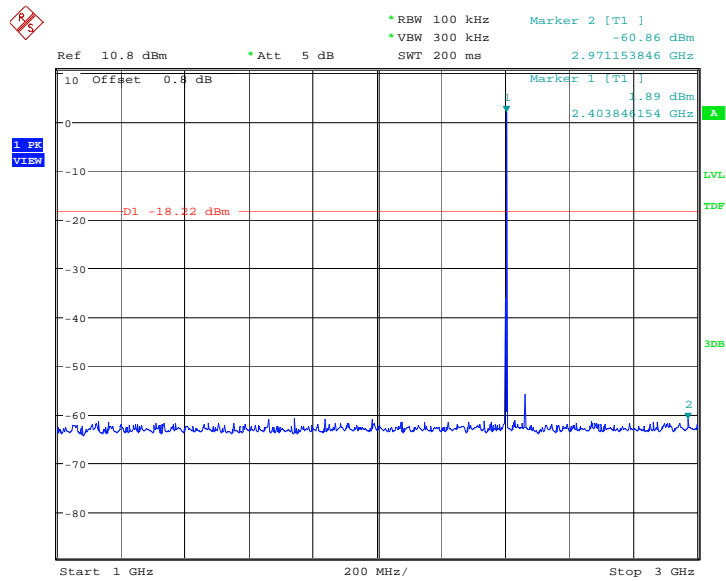


Date: 27.MAY.2014 11:16:29

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

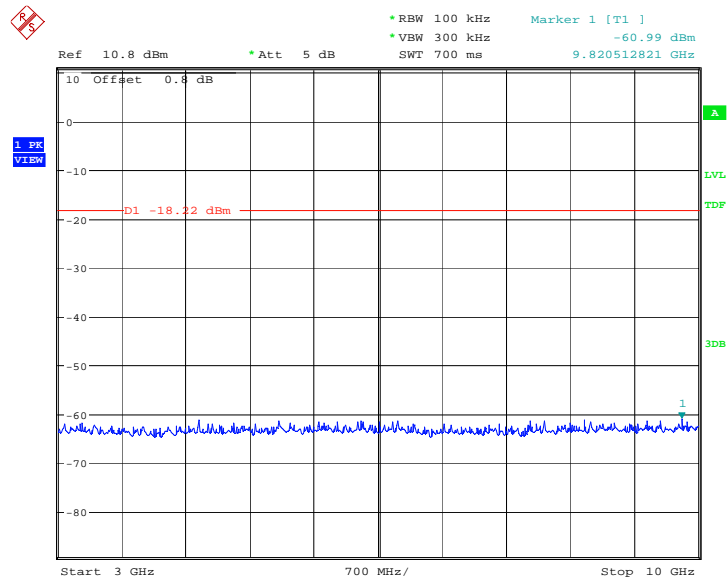


Date: 27.MAY.2014 11:16:45

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

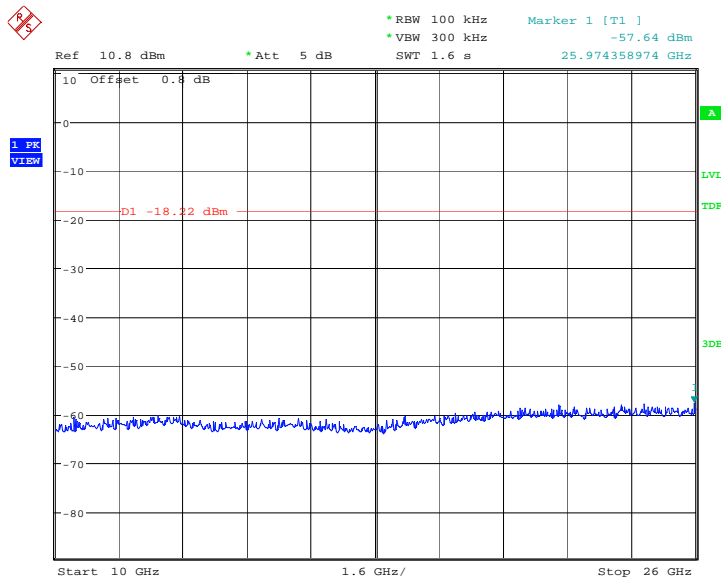


Date: 27.MAY.2014 11:17:02

Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

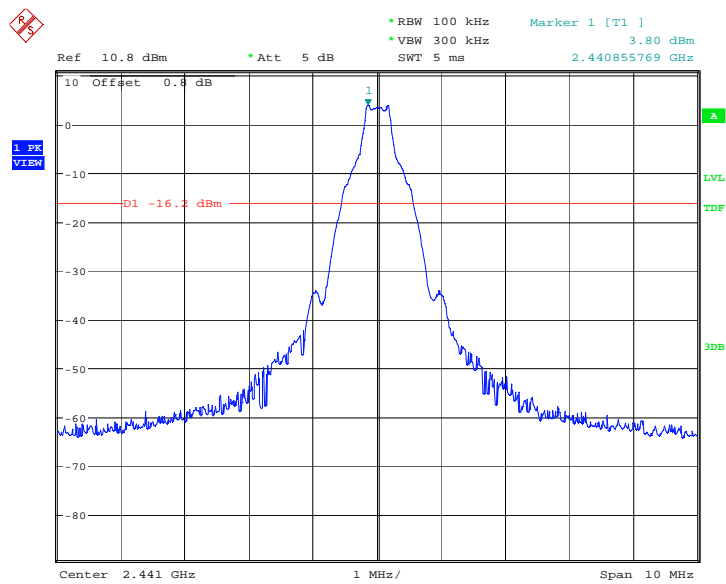


Date: 27.MAY.2014 11:17:19

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

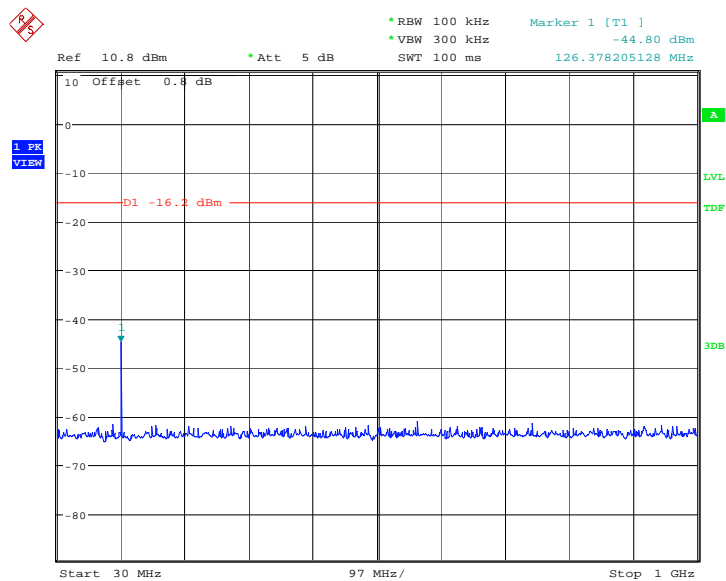


Date: 27.MAY.2014 11:17:35

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

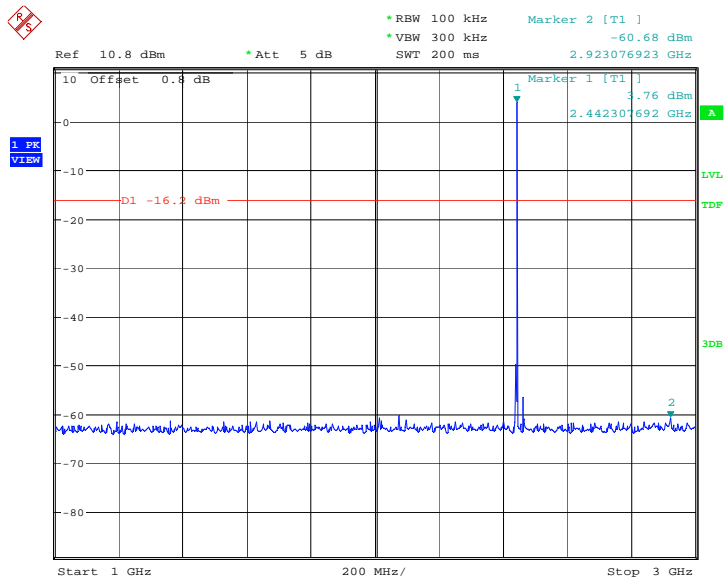


Date: 27.MAY.2014 11:18:07

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

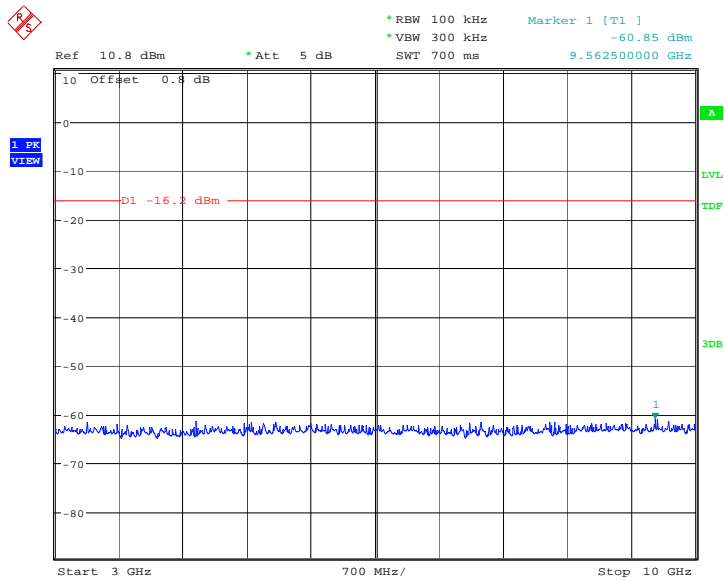


Date: 27.MAY.2014 11:18:24

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

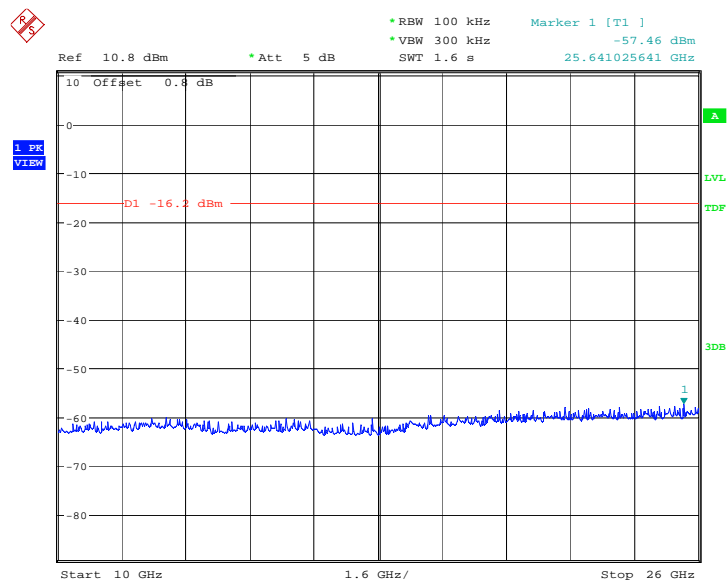


Date: 27.MAY.2014 11:18:40

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

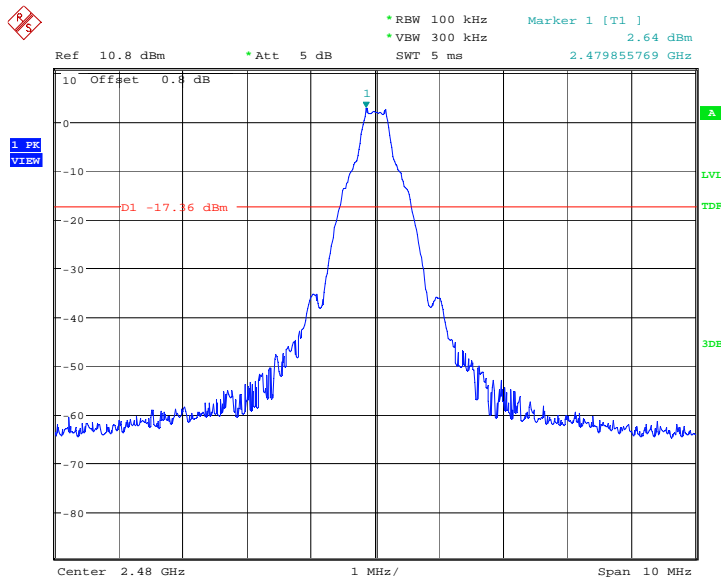


Date: 27.MAY.2014 11:18:57

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

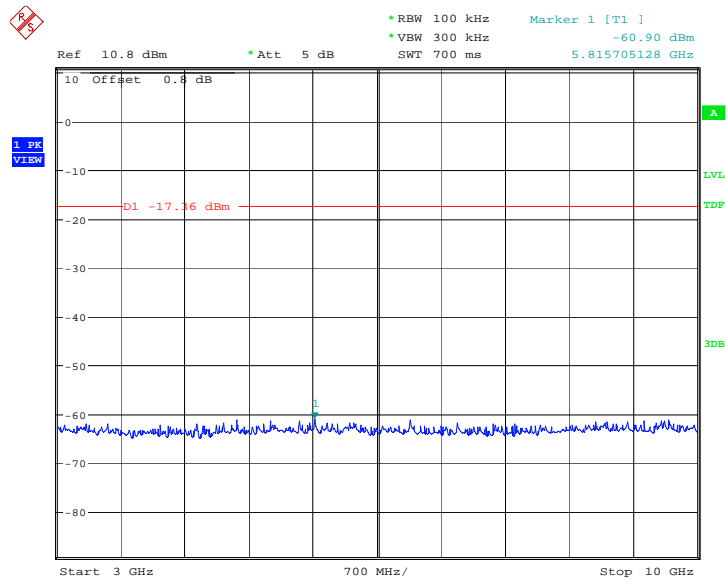


Date: 27.MAY.2014 11:20:02

Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

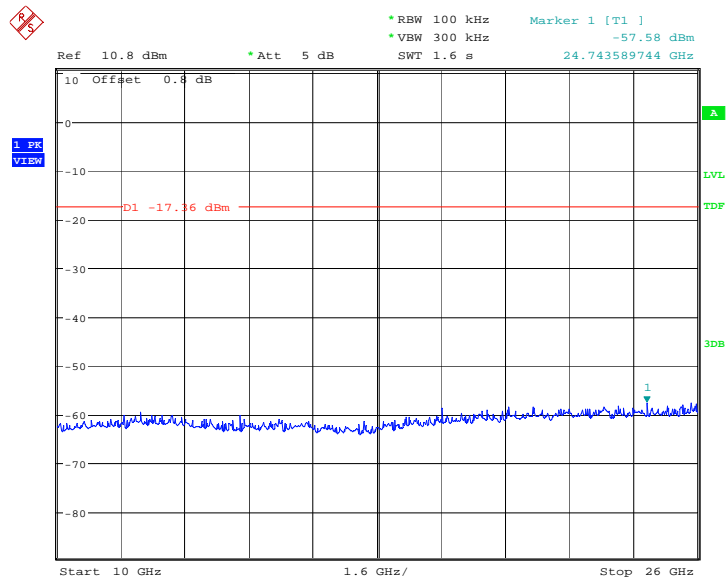


Date: 27.MAY.2014 11:20:18

Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

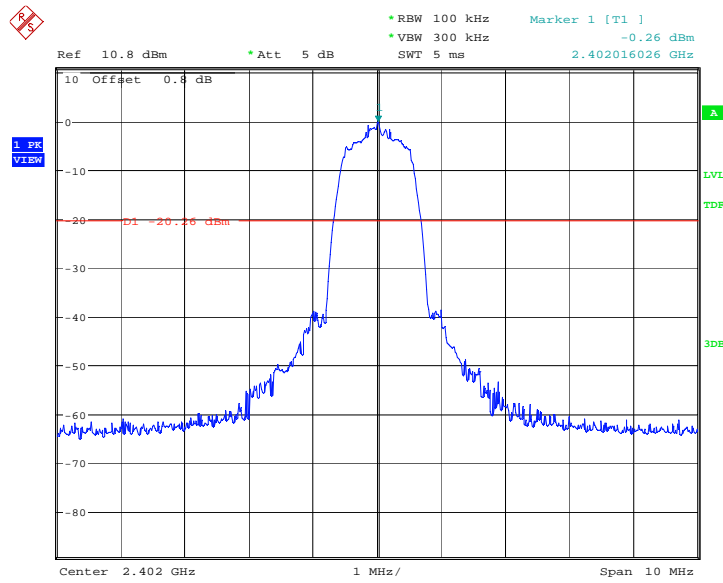


Date: 27.MAY.2014 11:37:12

Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

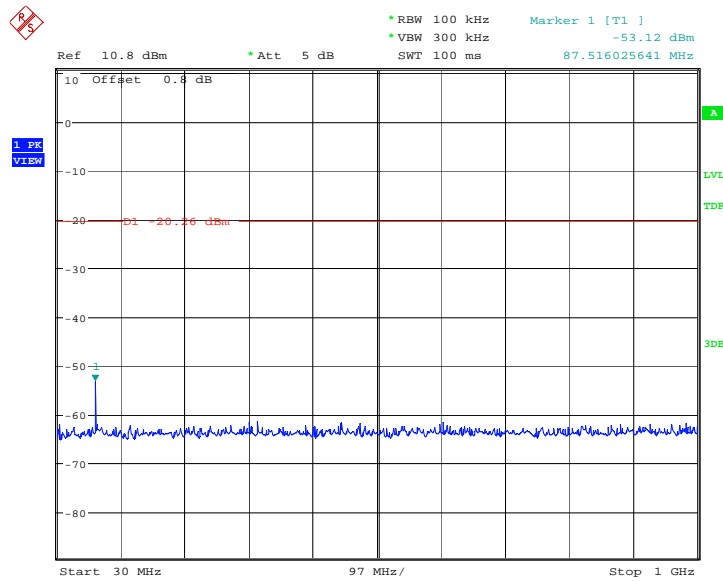


Date: 27.MAY.2014 11:37:28

Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

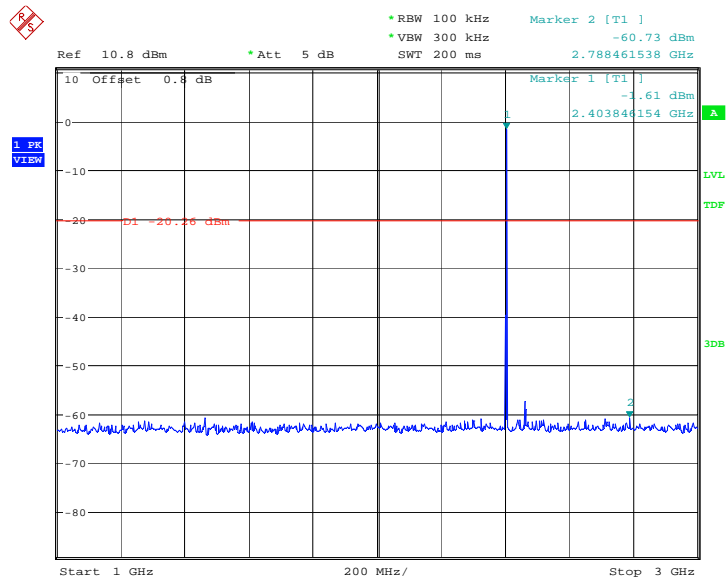


Date: 27.MAY.2014 11:38:00

Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

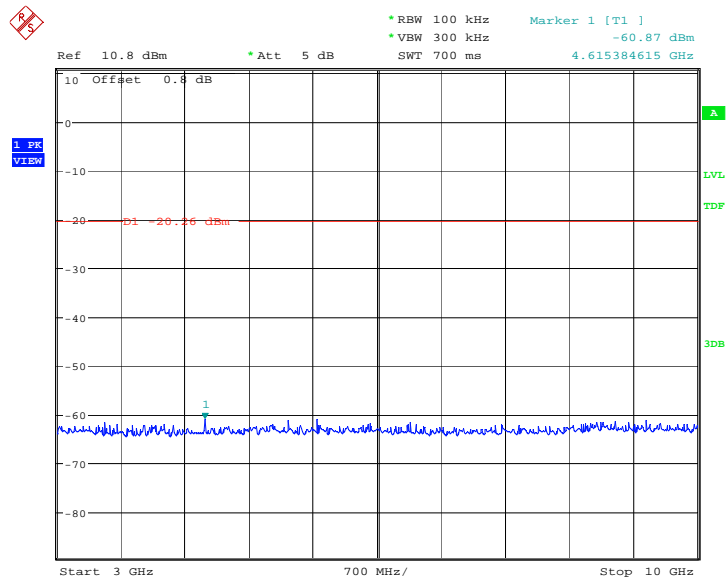


Date: 27.MAY.2014 11:38:16

Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

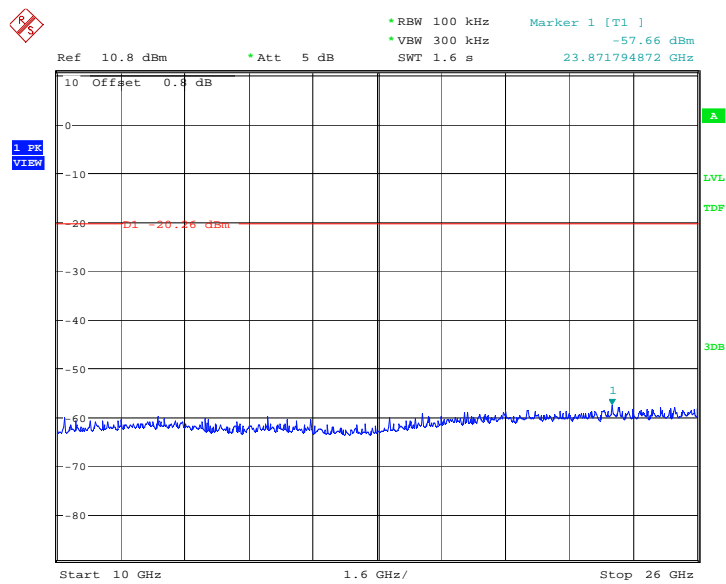


Date: 27.MAY.2014 11:38:33

Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 10GHz - 26GHz

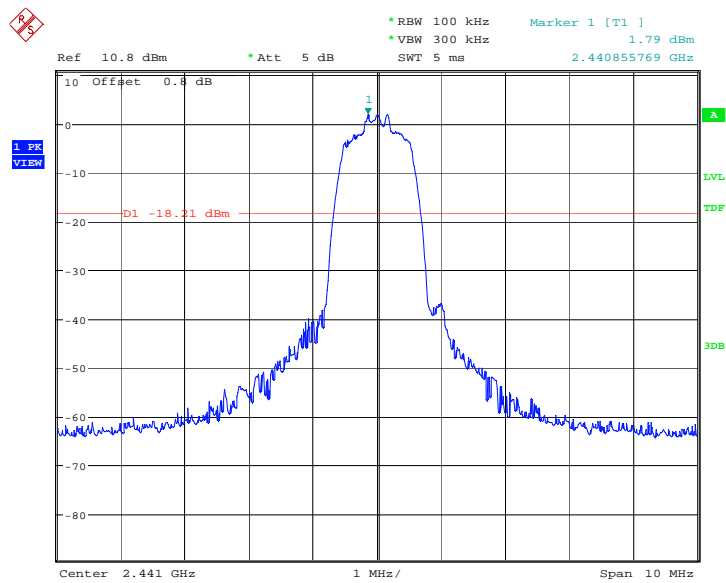


Date: 27.MAY.2014 11:38:50

Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

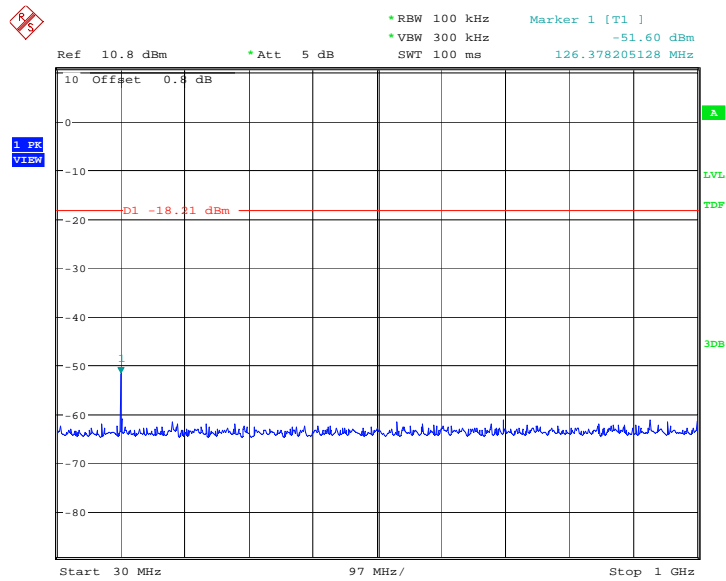


Date: 27.MAY.2014 11:39:06

Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

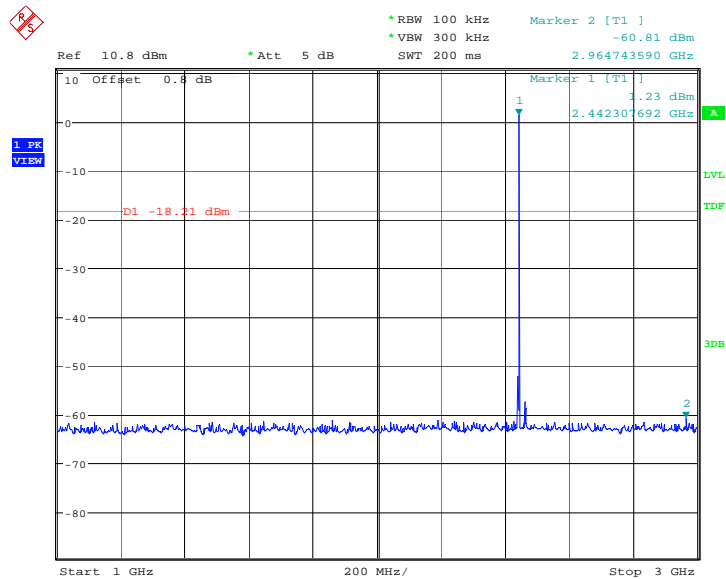


Date: 27.MAY.2014 11:39:38

Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

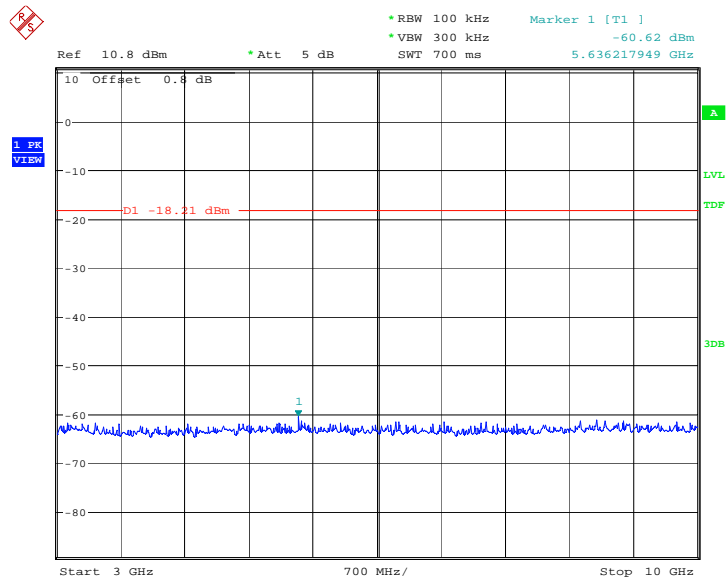


Date: 27.MAY.2014 11:39:54

Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

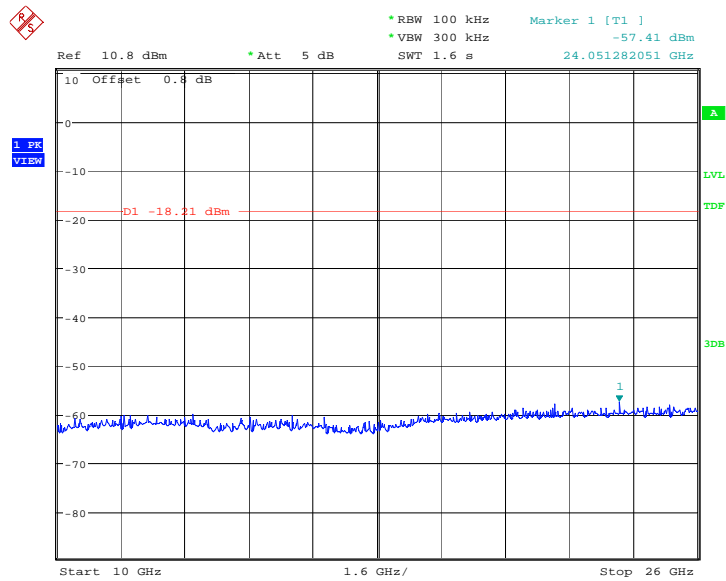


Date: 27.MAY.2014 11:40:11

Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

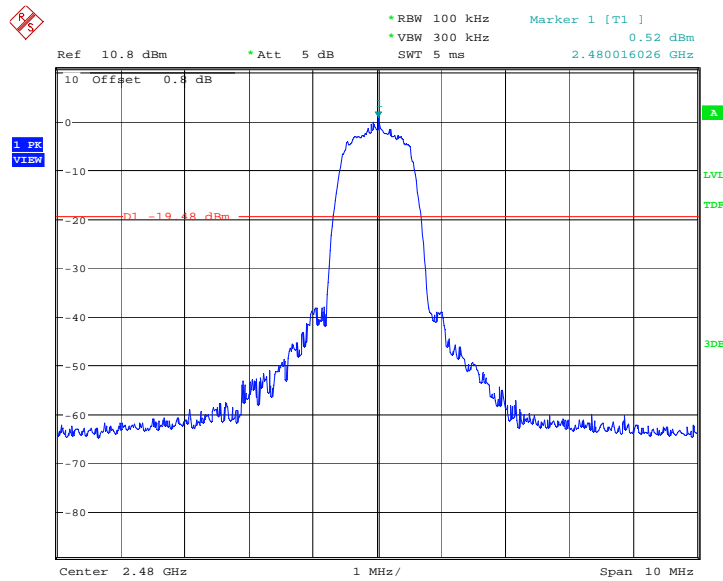


Date: 27.MAY.2014 11:40:28

Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

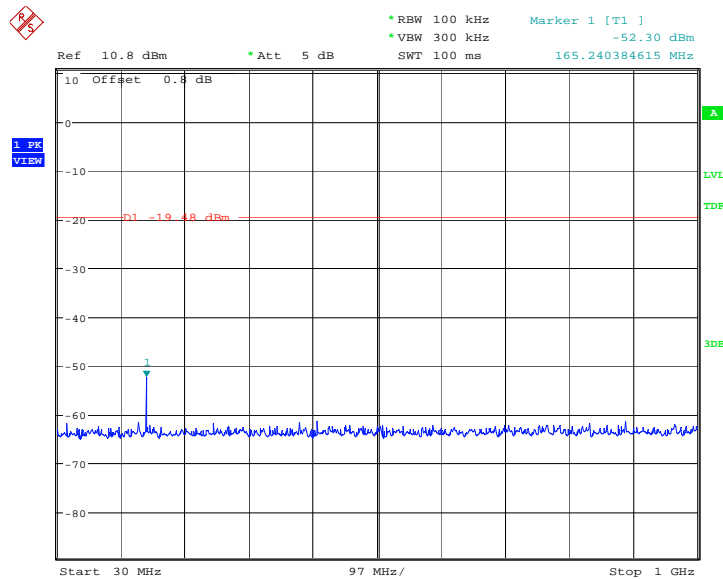


Date: 27.MAY.2014 11:40:44

Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

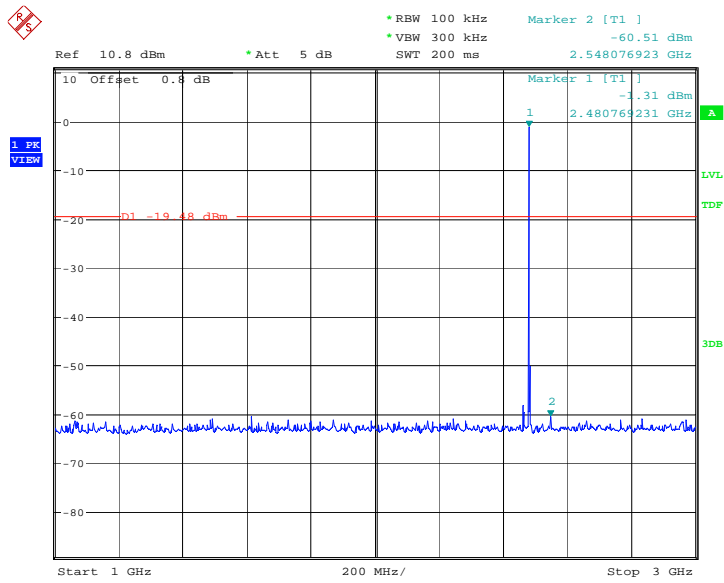


Date: 27.MAY.2014 11:41:16

Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

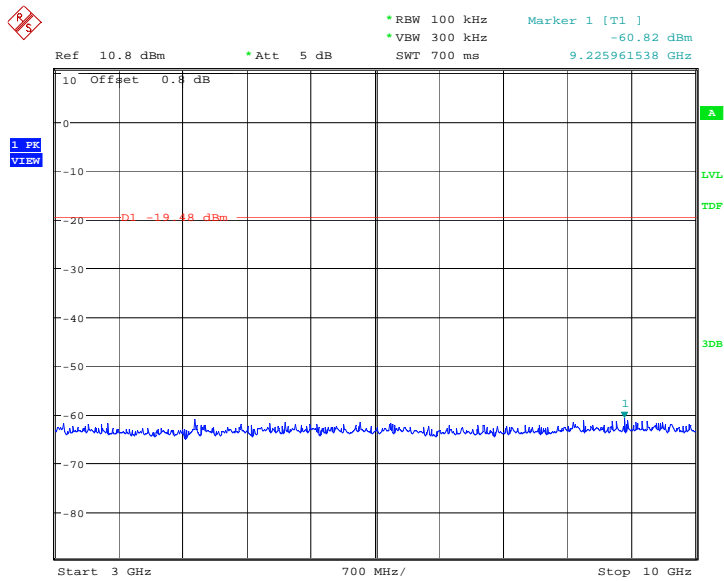


Date: 27.MAY.2014 11:41:32

Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

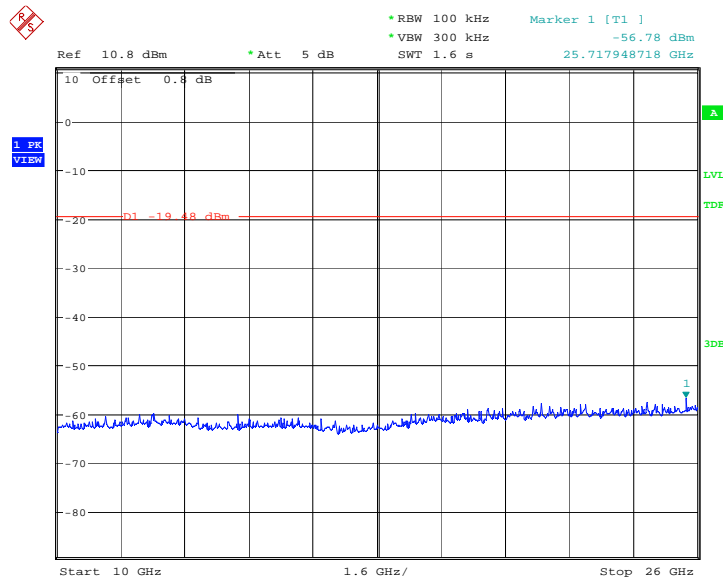


Date: 27.MAY.2014 11:41:49

Fig.42. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

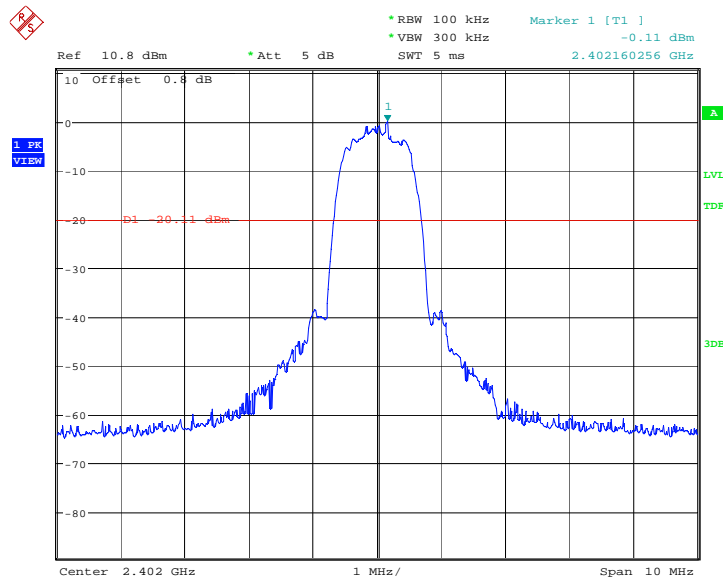


Date: 27.MAY.2014 11:58:41

Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

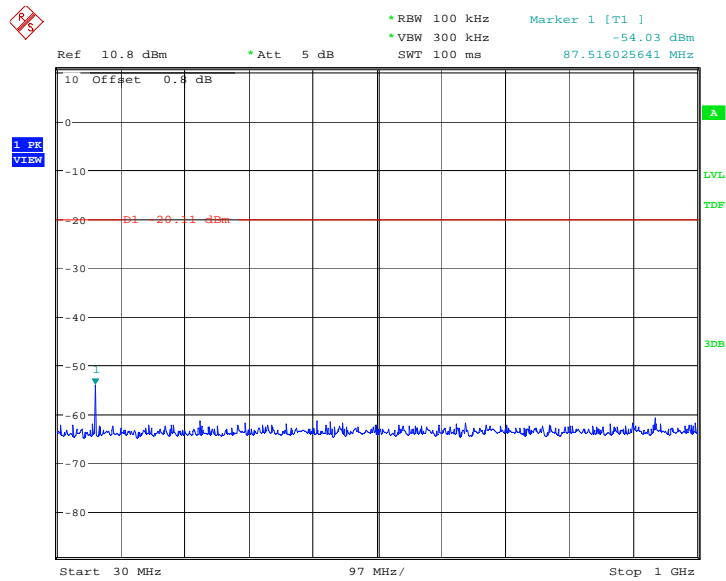


Date: 27.MAY.2014 11:58:58

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

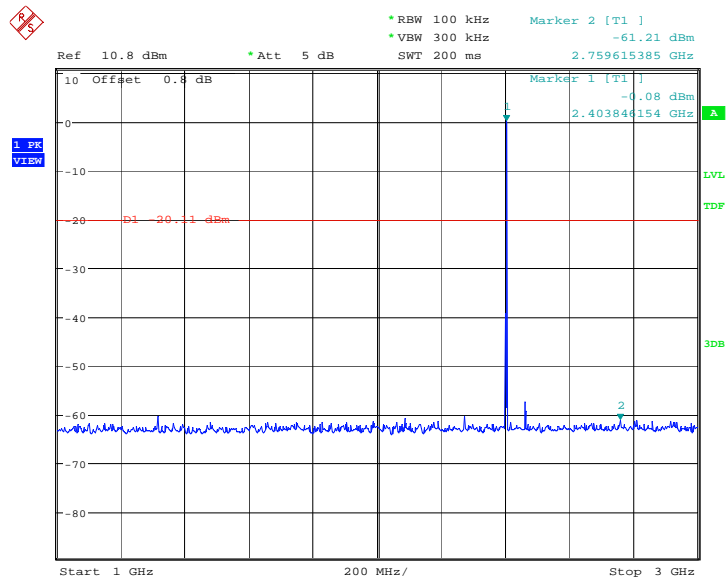


Date: 27.MAY.2014 11:59:30

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

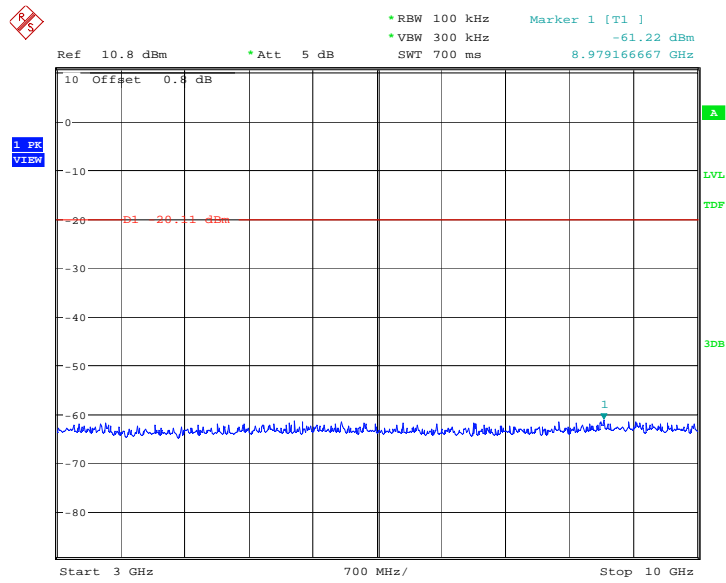


Date: 27.MAY.2014 11:59:46

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

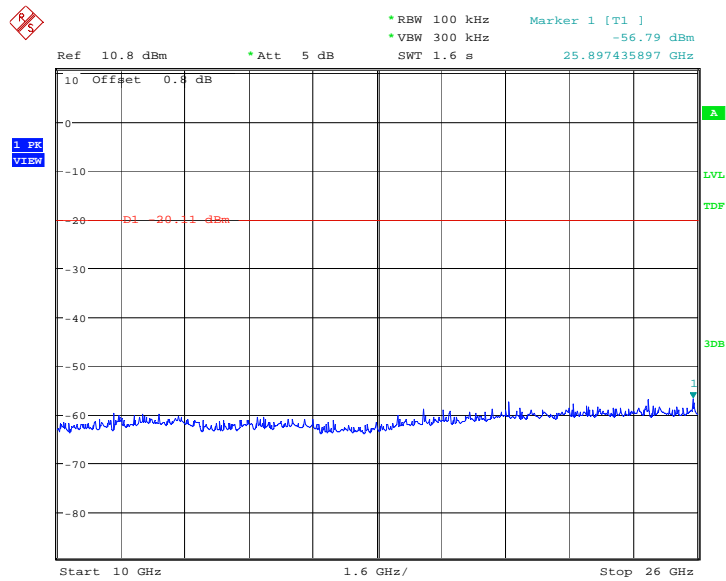


Date: 27.MAY.2014 12:00:03

Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz

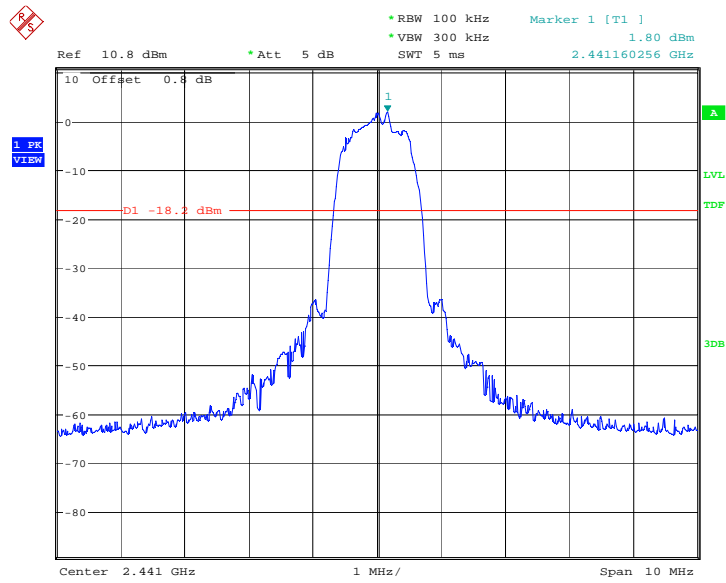


Date: 27.MAY.2014 12:00:20

Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

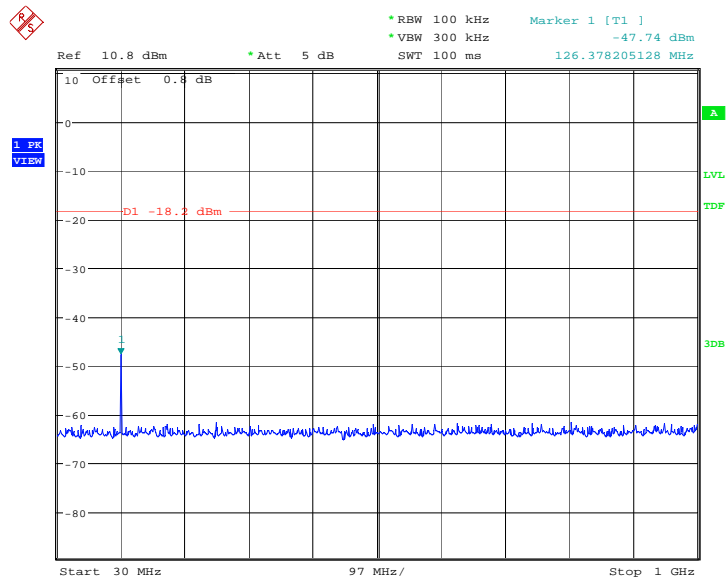


Date: 27.MAY.2014 12:00:36

Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

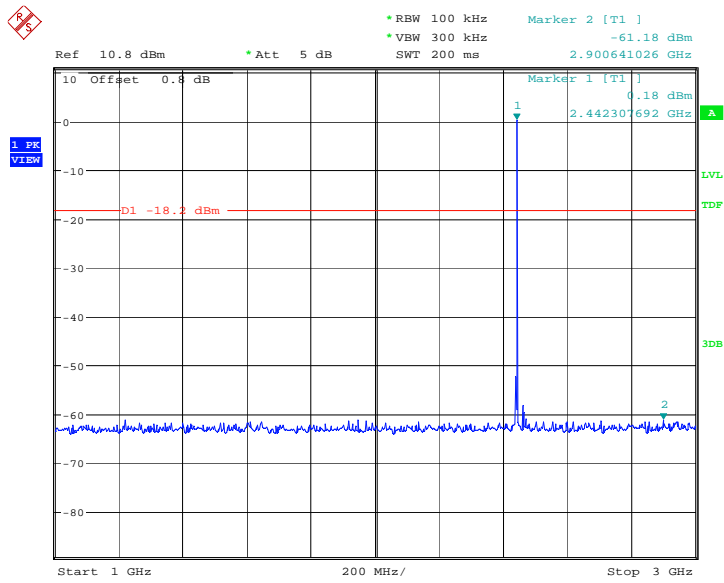


Date: 27.MAY.2014 12:01:08

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

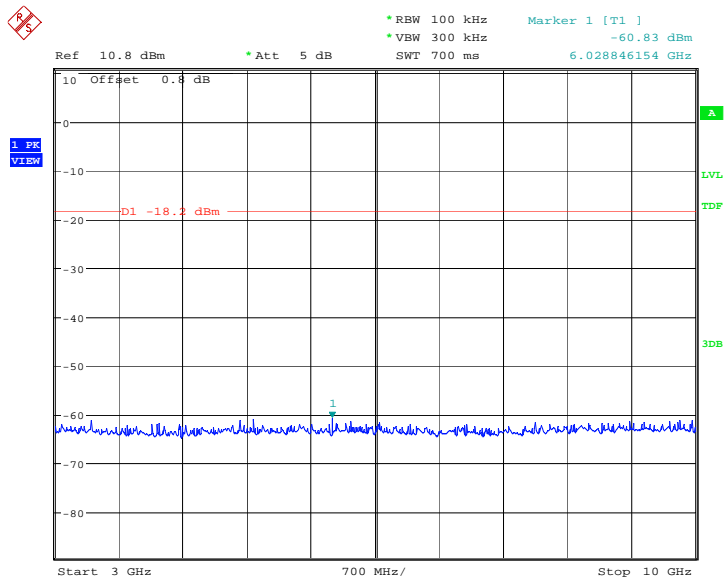


Date: 27.MAY.2014 12:01:24

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

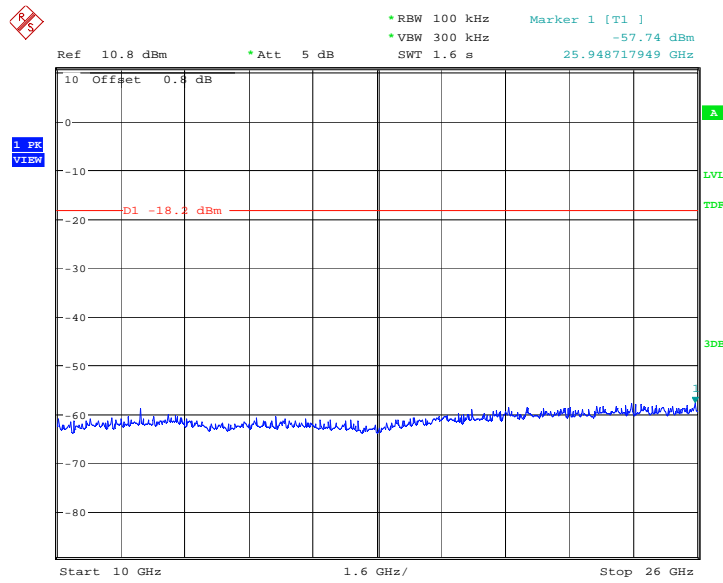


Date: 27.MAY.2014 12:01:40

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

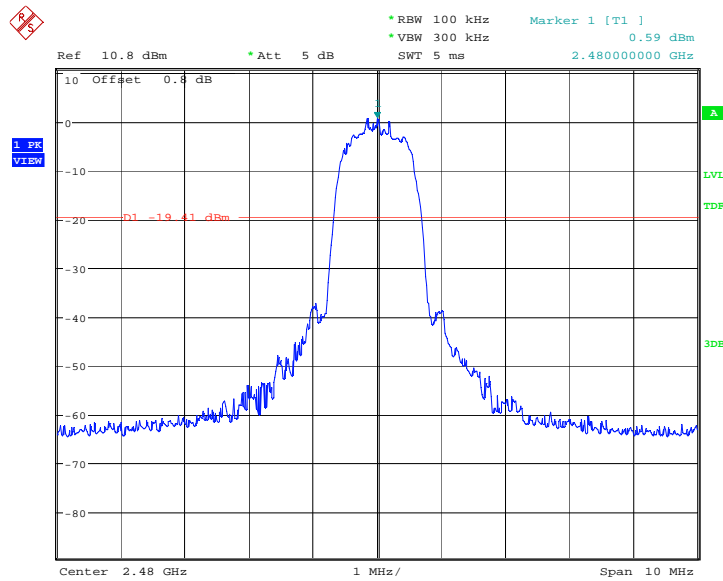


Date: 27.MAY.2014 12:01:56

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

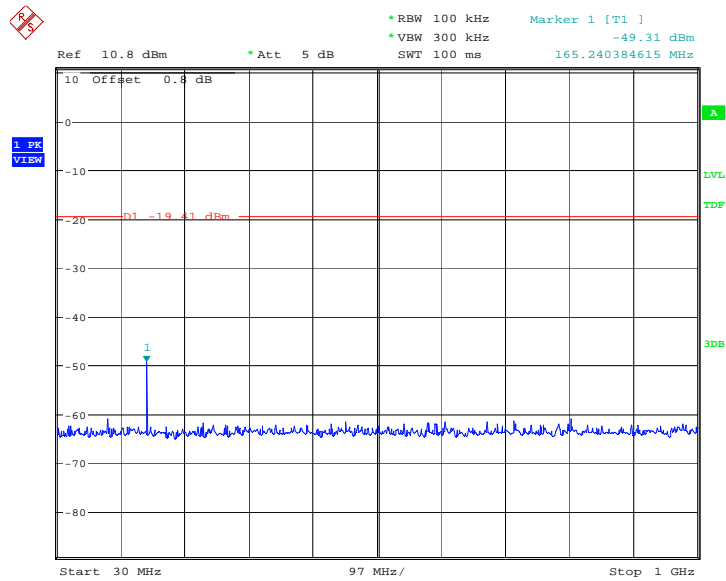


Date: 27.MAY.2014 12:02:12

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

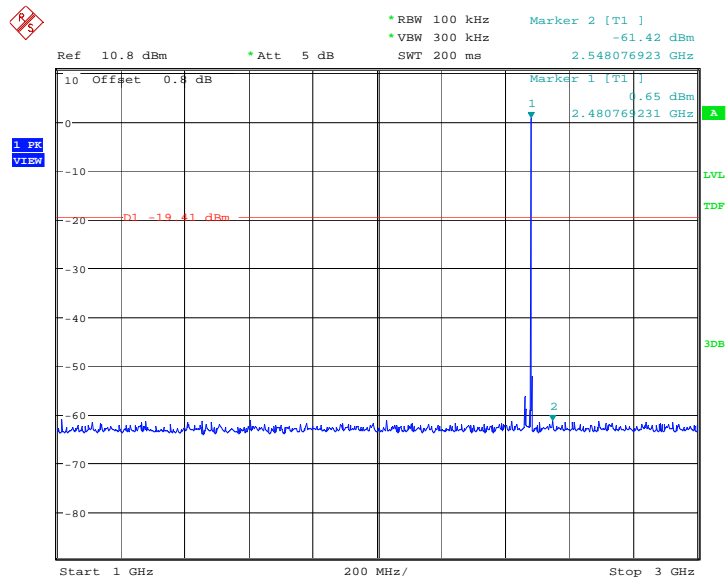


Date: 27.MAY.2014 12:02:43

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

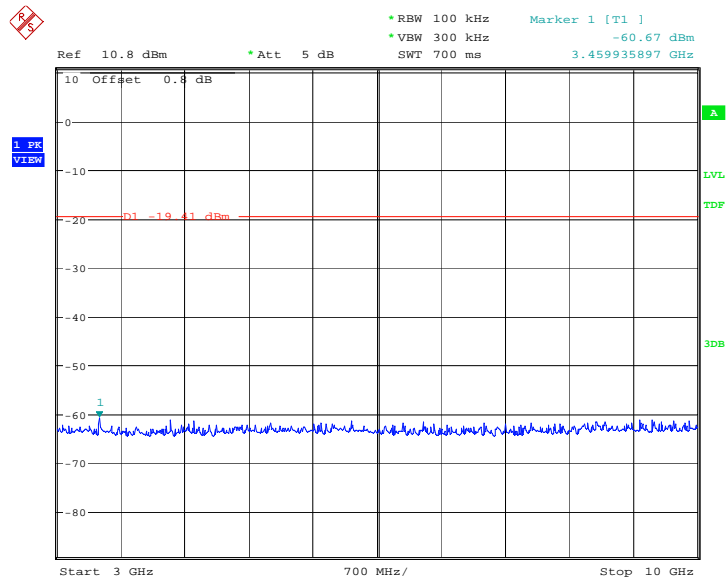

Date: 27.MAY.2014 12:02:59

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

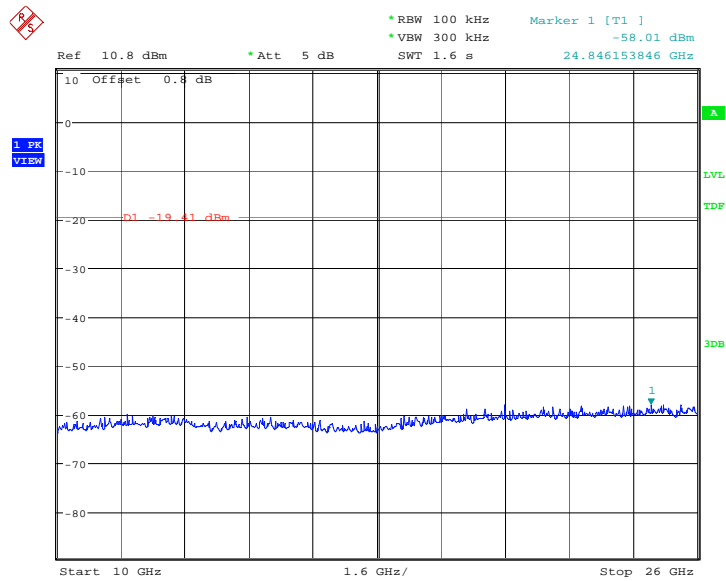

Date: 27.MAY.2014 12:03:15

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 RSS-210 A8.5	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
0.009-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result= $P_{Mea} + ARPL$

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.58	P
	3 GHz ~ 18 GHz	Fig.59	P
Ch 39 2441 MHz	9 KHz ~ 30 MHz	Fig.60	P
	30 MHz ~ 1 GHz	Fig.61	P
	1 GHz ~ 3 GHz	Fig.62	P
Ch 78 2480 MHz	3 GHz ~ 18 GHz	Fig.63	P
	1 GHz ~ 3 GHz	Fig.64	P
Power	3 GHz ~ 18 GHz	Fig.65	P
	2.38GHz~2.4GHz---L	Fig.66	P

Power	2.45GHz~2.5GHz---H	Fig.67	P
For all channels	18 GHz ~ 26 GHz	Fig.68	P

Forπ/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.69	P
	3 GHz ~ 18 GHz	Fig.70	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.71	P
	1 GHz ~ 3 GHz	Fig.72	P
	3 GHz ~ 18 GHz	Fig.73	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.74	P
	3 GHz ~ 18 GHz	Fig.75	P
Power	2.38GHz~2.4GHz---L	Fig.76	P
Power	2.45GHz~2.5GHz---H	Fig.77	P
For all channels	18 GHz ~ 26 GHz	Fig.78	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.79	P
	3 GHz ~ 18 GHz	Fig.80	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.81	P
	1 GHz ~ 3 GHz	Fig.82	P
	3 GHz ~ 18 GHz	Fig.83	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.84	P
	3 GHz ~ 18 GHz	Fig.85	P
Power	2.38GHz~2.4GHz---L	Fig.86	P
Power	2.45GHz~2.5GHz---H	Fig.87	P
For all channels	18 GHz ~ 26 GHz	Fig.88	P

GFSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
2390.000	33.1	-11.1	44.2	H
17982.000	39.6	27.9	11.7	V
17806.500	39.6	27.1	12.5	H
17979.000	39.5	27.9	11.6	V
17992.500	39.5	27.9	11.6	V
17827.500	39.4	27.1	12.3	V

GFSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17995.500	40.2	27.9	12.3	V
17979.000	40.2	27.9	12.3	V
17982.000	40.1	27.9	12.2	V
17806.500	40.0	27.1	12.9	V

17992.500	40.0	27.9	12.1	V
17998.500	40.0	27.9	12.1	V

GFSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	33.1	-11.2	44.3	V
17995.500	40.4	27.9	12.5	V
17982.000	40.3	27.9	12.4	H
17979.000	40.2	27.9	12.3	V
17992.500	40.1	27.9	12.2	V
17998.500	40.1	27.9	12.2	V

$\pi/4$ DQPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2390.000	33.3	-11.1	44.4	V
17979.000	40.5	27.9	12.6	V
17779.500	40.4	27.1	13.3	V
17982.000	40.4	27.9	12.5	H
17992.500	40.4	27.9	12.5	V
17782.500	40.4	27.1	13.3	H

$\pi/4$ DQPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17986.500	40.3	27.9	12.4	V
17982.000	40.2	27.9	12.3	V
17989.500	40.2	27.9	12.3	H
17995.500	40.1	27.9	12.2	H
17766.000	40.1	27.1	13.0	V
17998.500	40.1	27.9	12.2	V

$\pi/4$ DQPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	33.1	-11.2	44.3	V
17982.000	40.6	27.9	12.7	V
17995.500	40.5	27.9	12.6	V
17979.000	40.3	27.9	12.4	H
17992.500	40.2	27.9	12.3	V
17986.500	40.2	27.9	12.3	V

8DPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2390.000	33.2	-11.1	44.3	V
17989.500	40.6	27.9	12.7	V
17992.500	40.5	27.9	12.6	H
17979.000	40.5	27.9	12.6	V

17982.000	40.4	27.9	12.5	H
17949.000	40.4	27.9	12.5	V

8DPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17982.000	40.6	27.9	12.700	V
17995.500	40.4	27.9	12.500	V
17806.500	40.3	27.1	13.200	H
17979.000	40.3	27.9	12.400	V
17803.500	40.2	27.1	13.100	H
17779.500	40.2	27.1	13.100	V

8DPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	33.1	-11.2	44.3	V
17989.500	40.8	27.9	12.9	V
17982.000	40.6	27.9	12.7	H
17779.500	40.6	27.1	13.5	V
17806.500	40.5	27.1	13.4	V
17998.500	40.4	27.9	12.5	V

Conclusion: PASS

Test graphs as below:

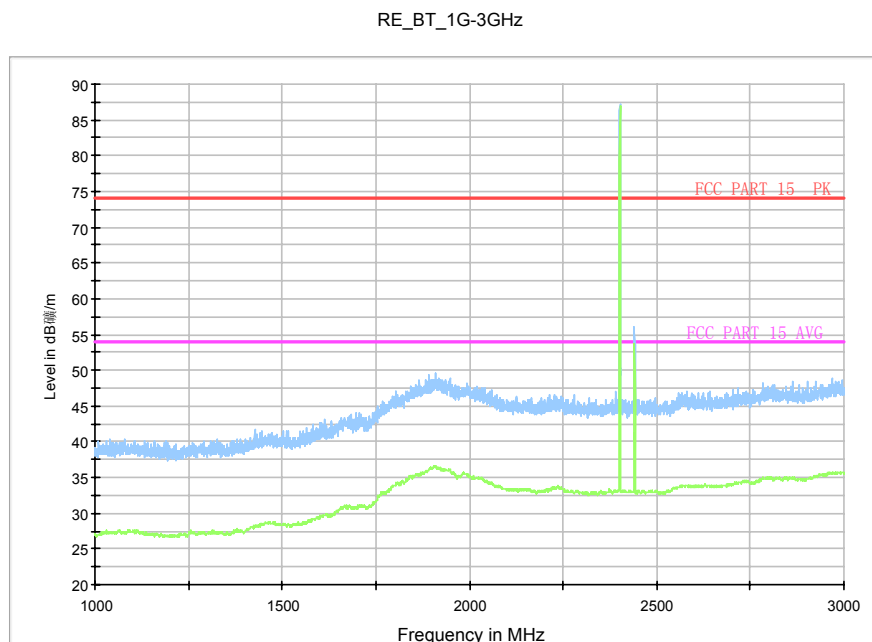


Fig.58. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

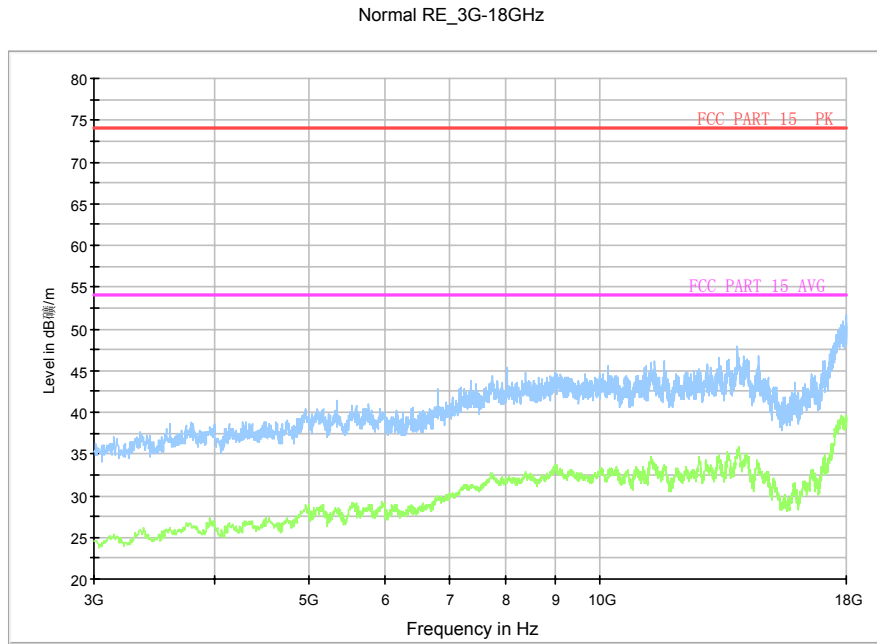


Fig.59. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

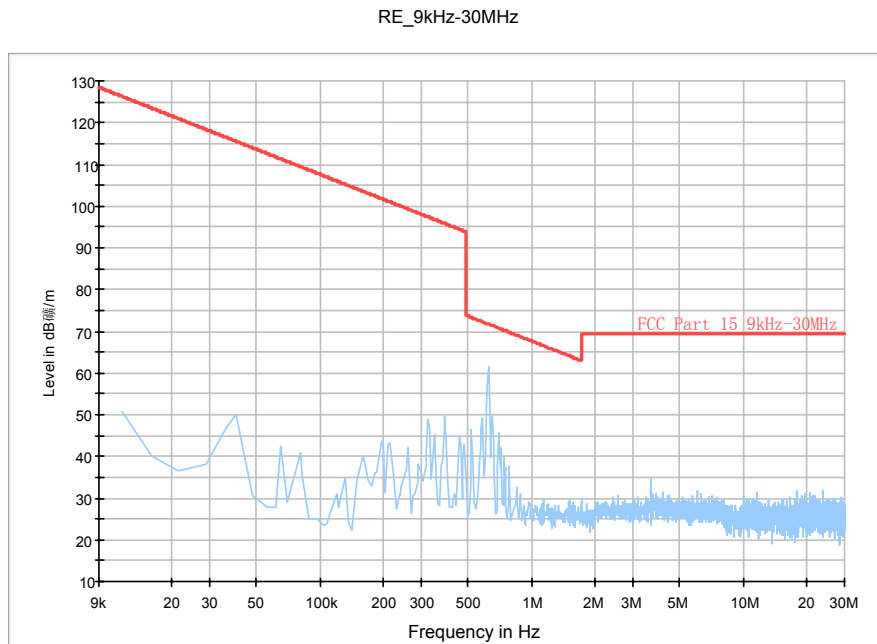


Fig.60. Radiated emission: GFSK, Channel 39, 9 KHz - 30 MHz

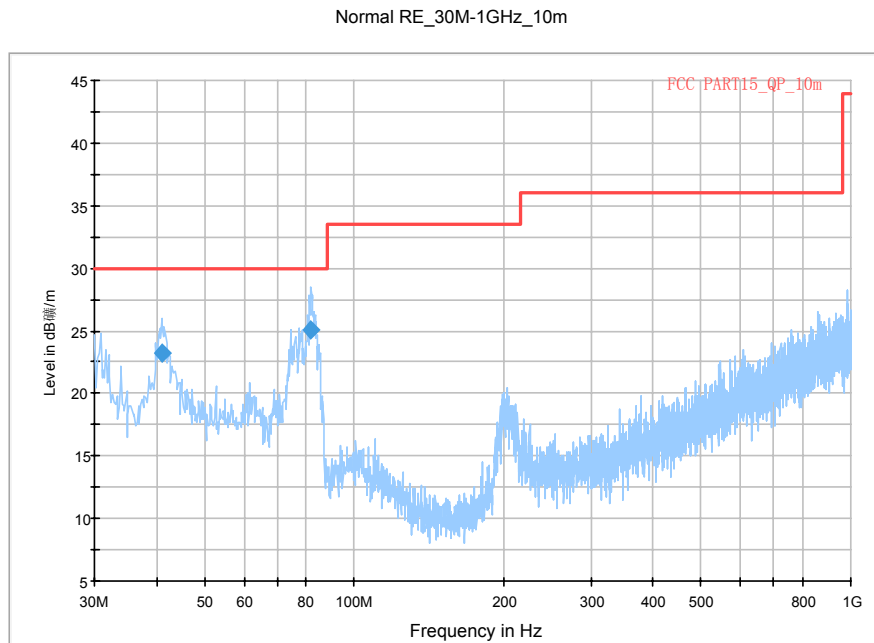


Fig.61. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

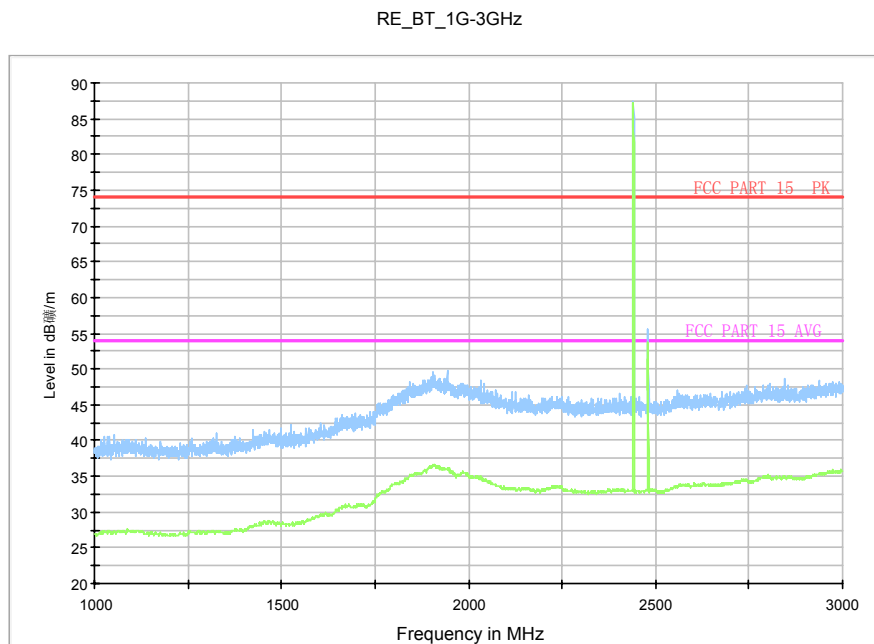


Fig.62. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

Normal RE_3G-18GHz

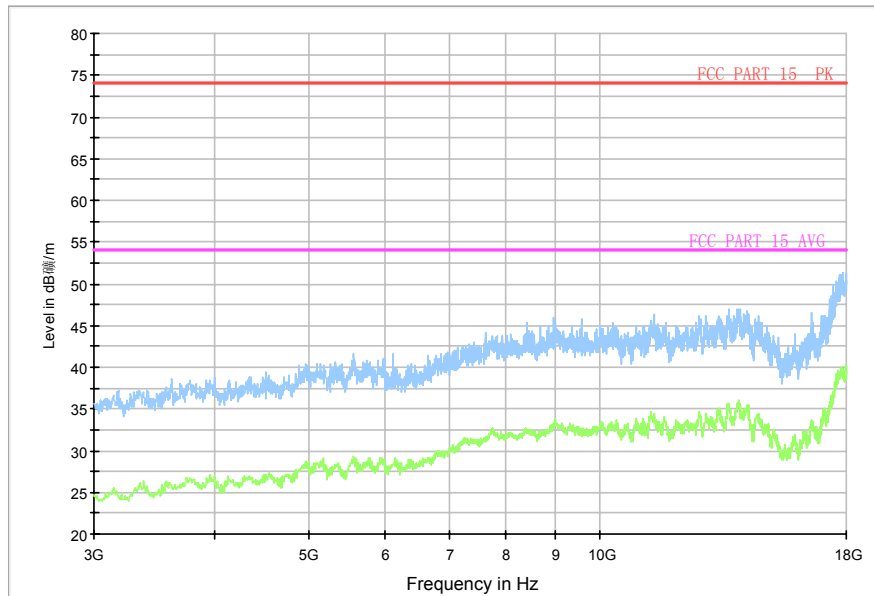


Fig.63. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

RE_BT_1G-3GHz

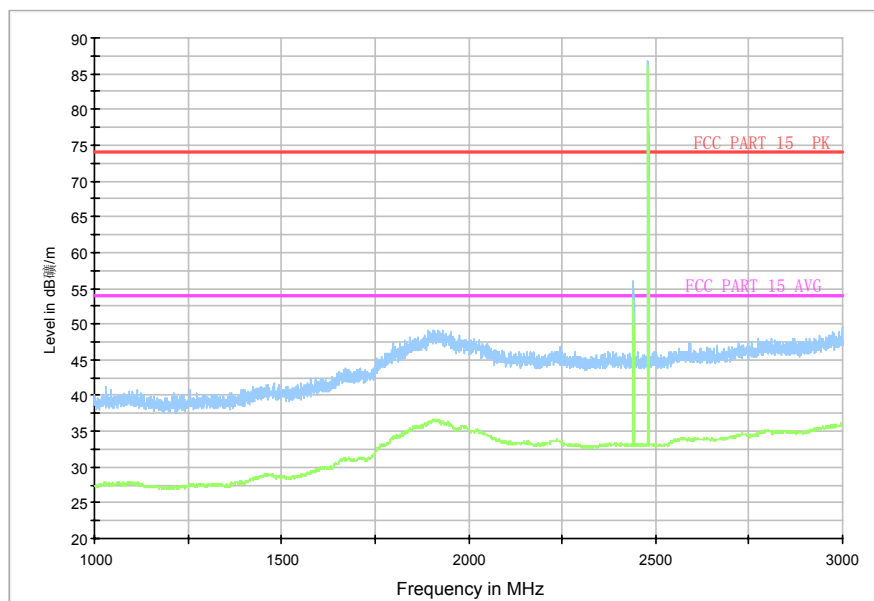


Fig.64. Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

Normal RE_3G-18GHz

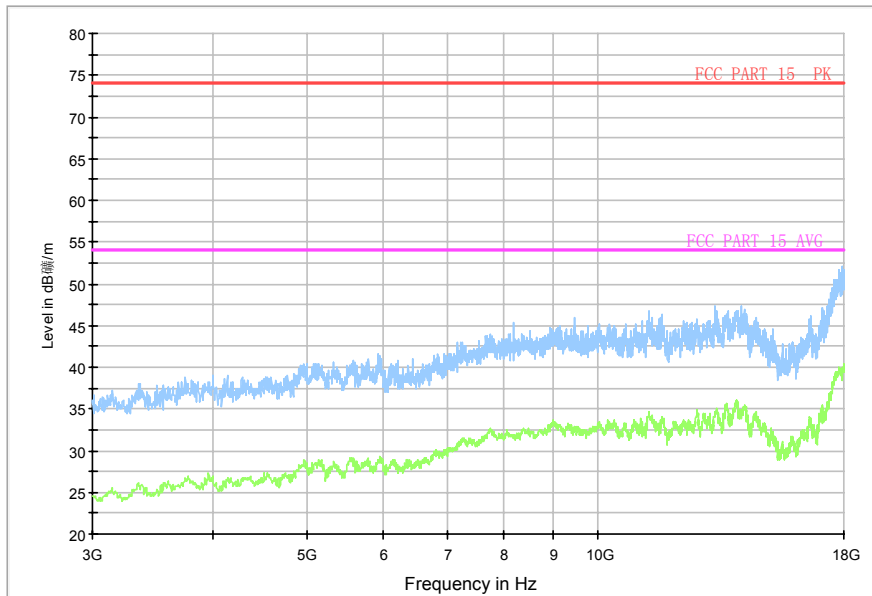


Fig.65. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

RE-BT-Power_2.38G-2.43GHz

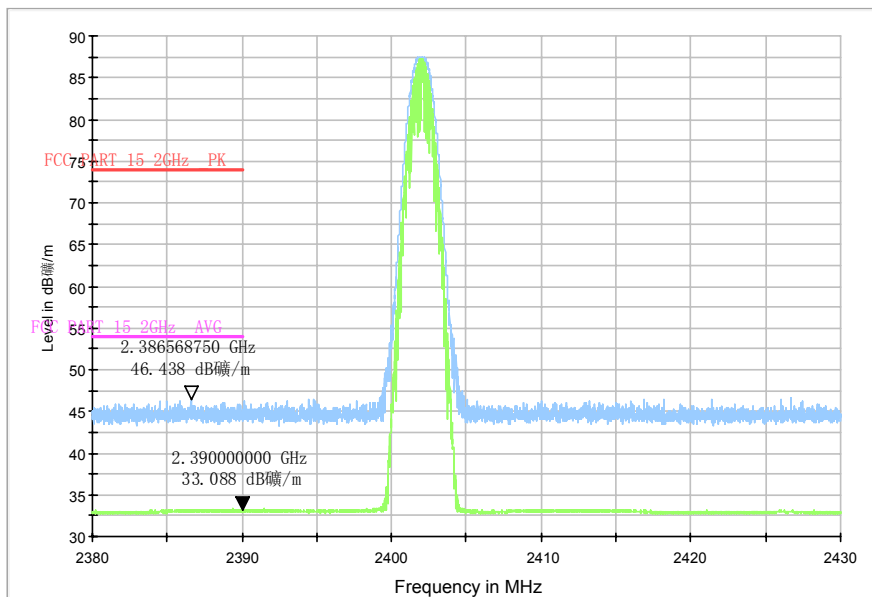


Fig.66. Radiated emission (Power): GFSK, low channel

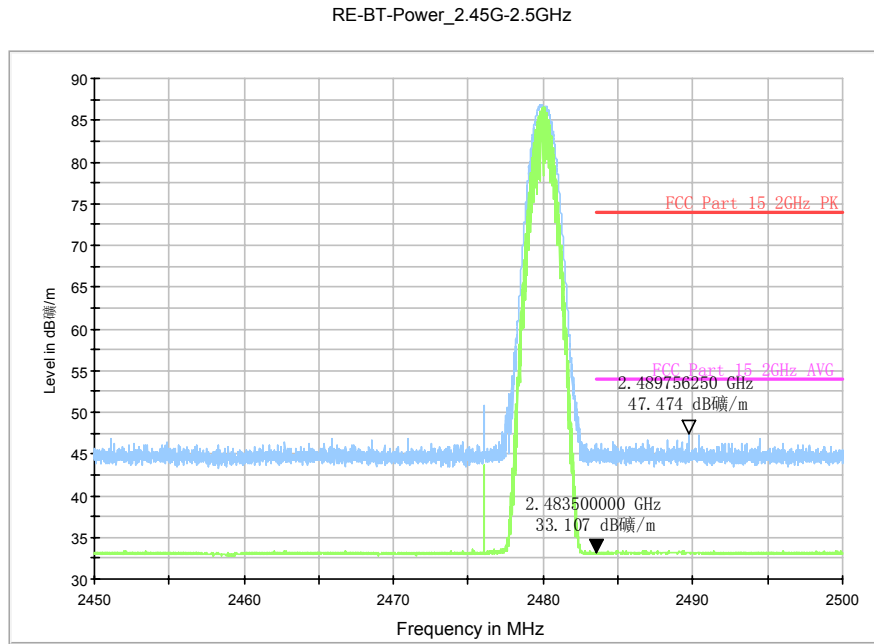


Fig.67. Radiated emission (Power) GFSK, high channel

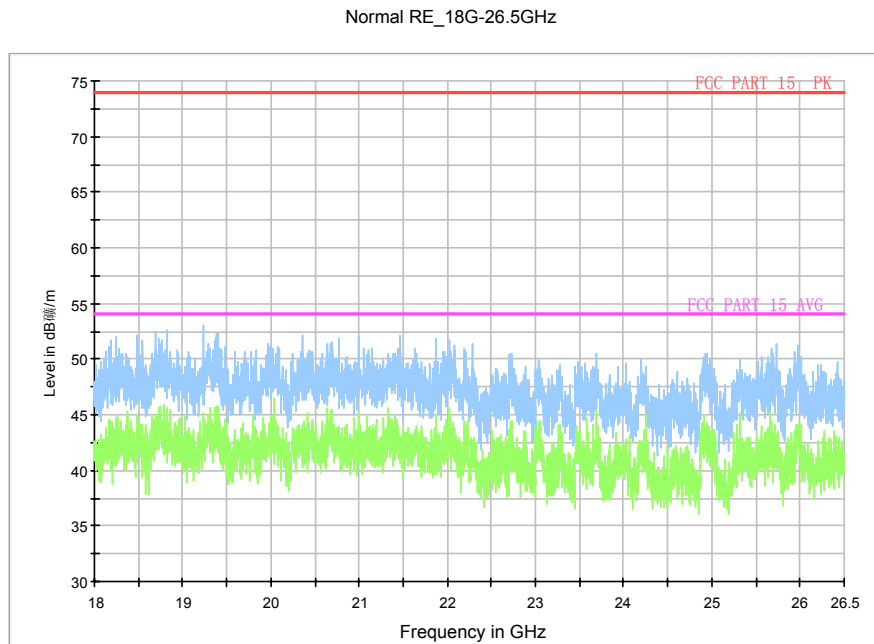


Fig.68. Radiated emission: GFSK, 18 GHz - 26 GHz

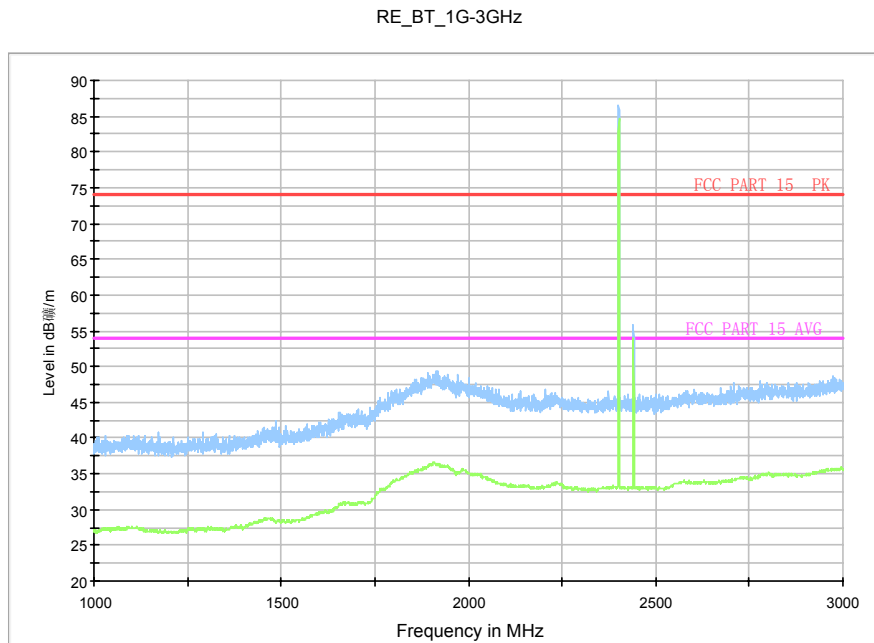


Fig.69. Radiated emission: $\pi/4$ DQPSK, Channel 0, 1 GHz - 3 GHz

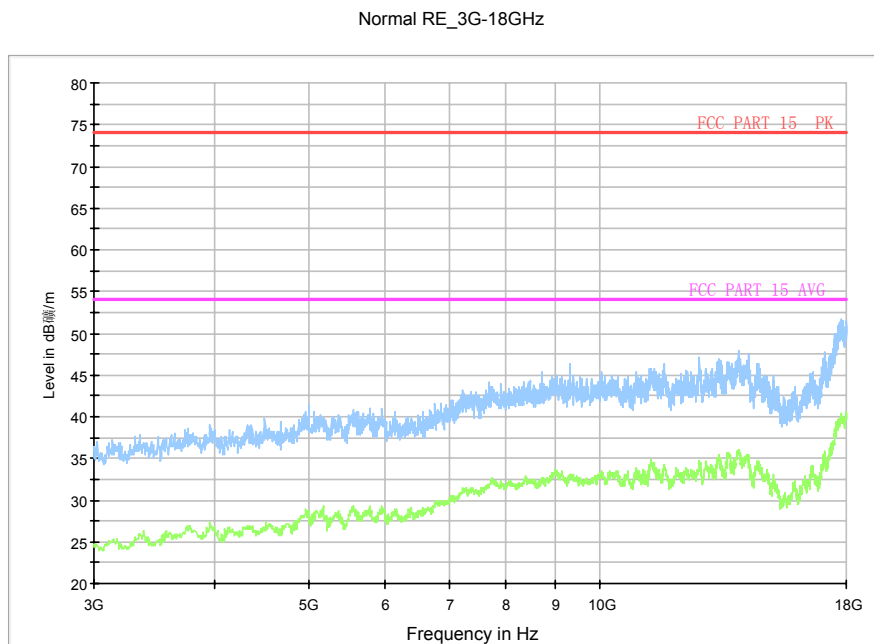


Fig.70. Radiated emission: $\pi/4$ DQPSK, Channel 0, 3 GHz - 18 GHz

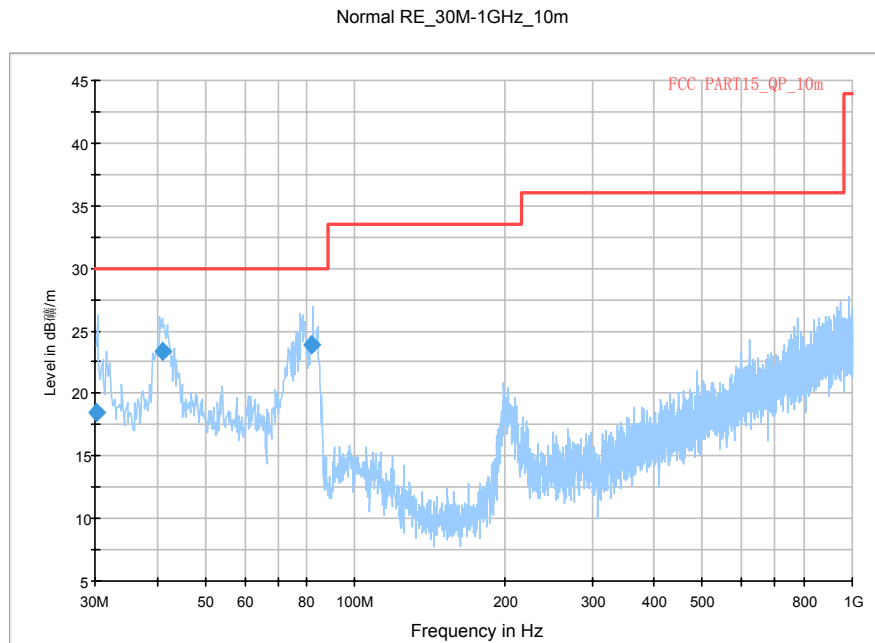


Fig.71. Radiated emission: $\pi/4$ DQPSK, Channel 39, 30 MHz - 1 GHz

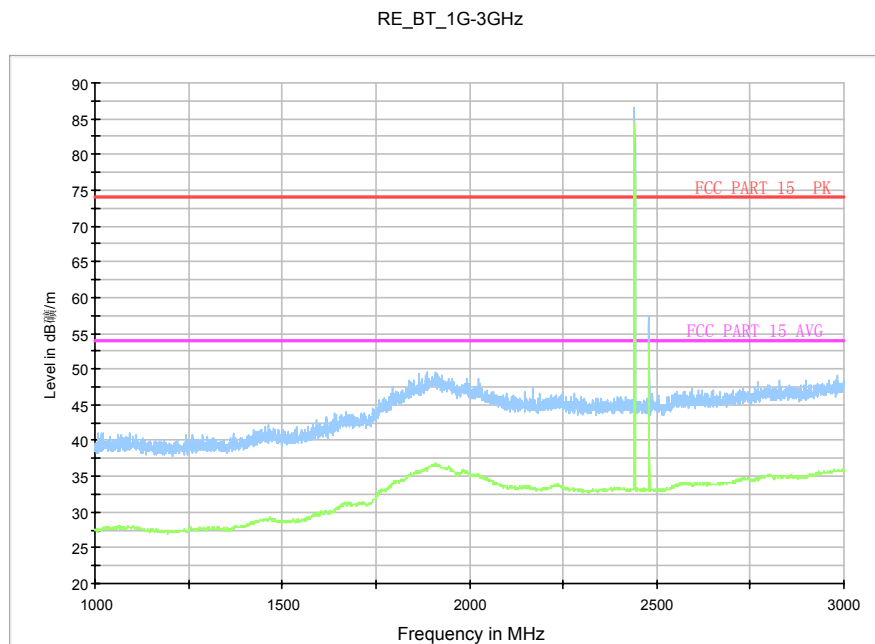


Fig.72. Radiated emission: $\pi/4$ DQPSK, Channel 39, 1 GHz - 3 GHz

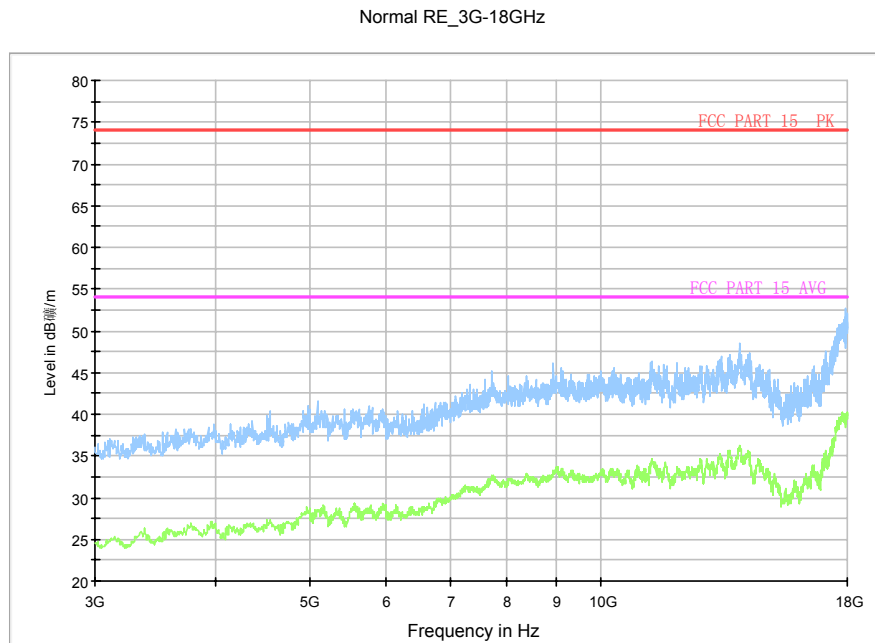


Fig.73. Radiated emission: $\pi/4$ DQPSK, Channel 39, 3 GHz - 18 GHz

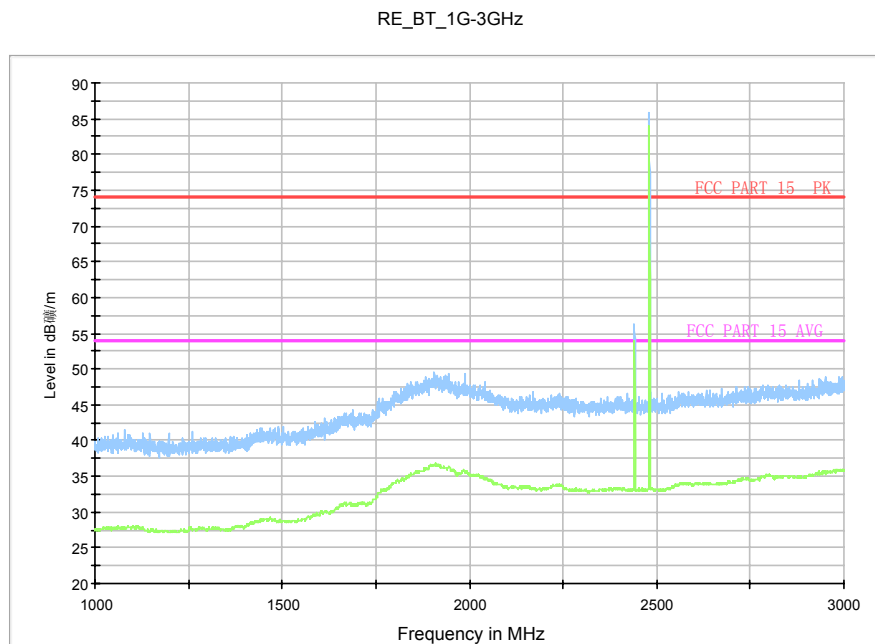


Fig.74. Radiated emission: $\pi/4$ DQPSK, Channel 78, 1 GHz - 3 GHz

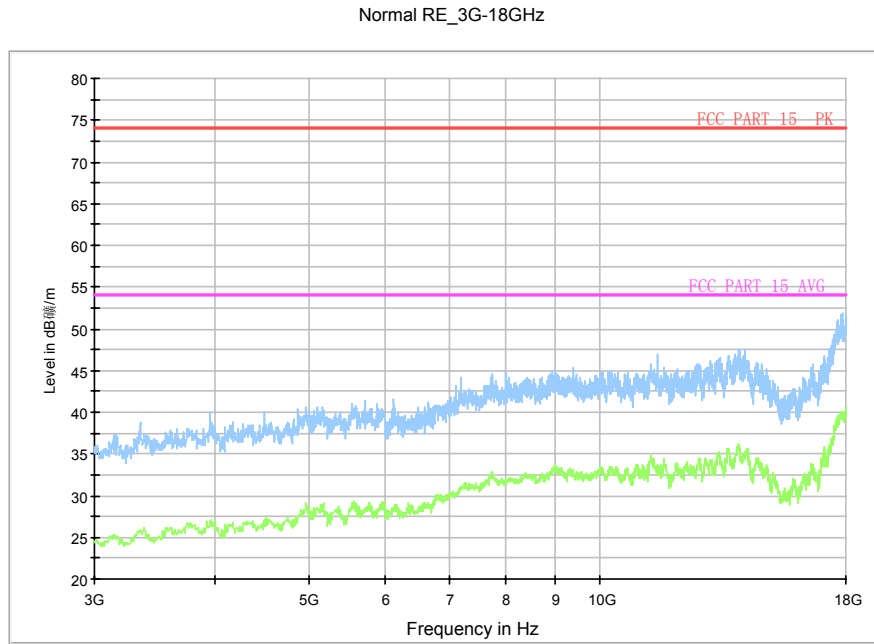


Fig.75. Radiated emission: $\pi/4$ DQPSK, Channel 78, 3 GHz - 18 GHz

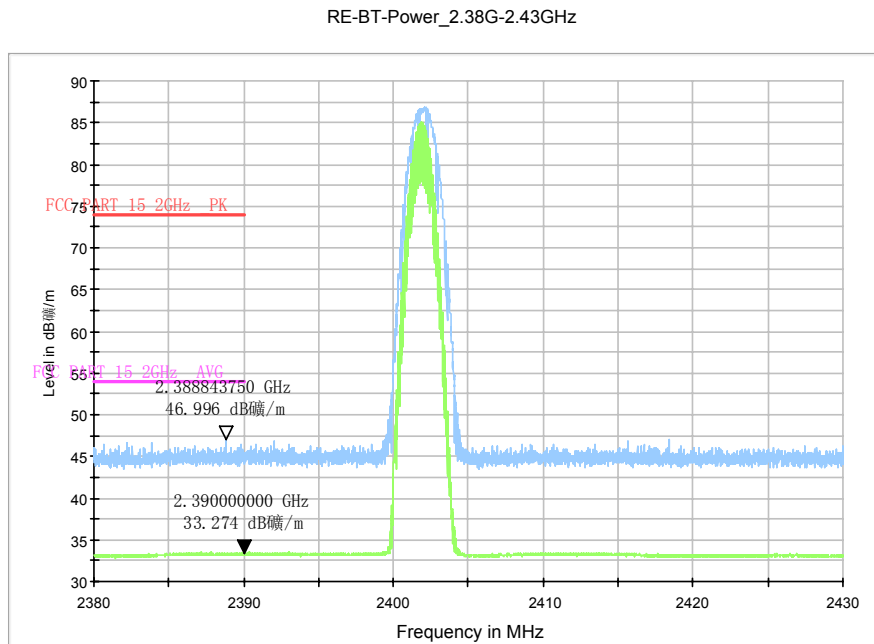


Fig.76. Radiated emission (Power): $\pi/4$ DQPSK, low channel

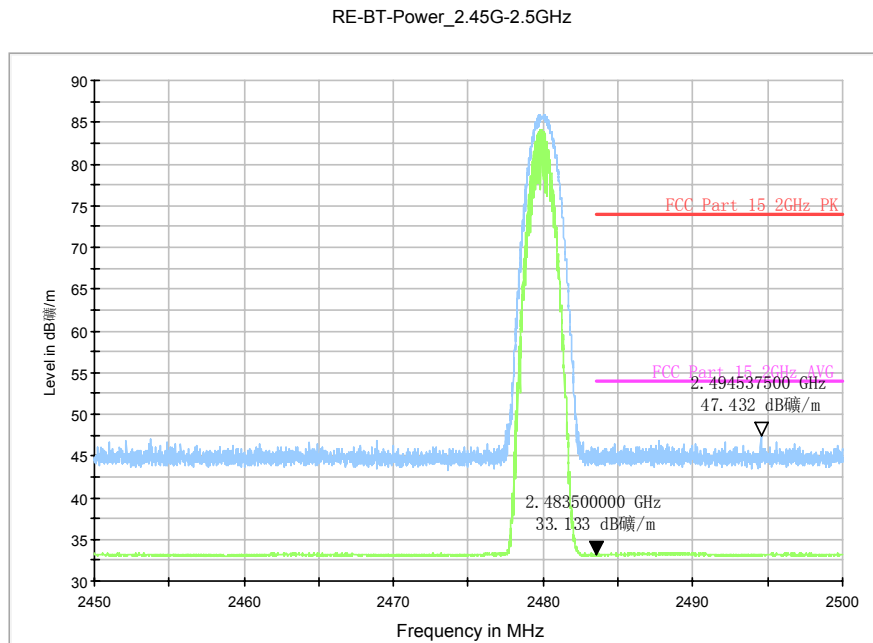


Fig.77. Radiated emission (Power): $\pi/4$ DQPSK, high channel

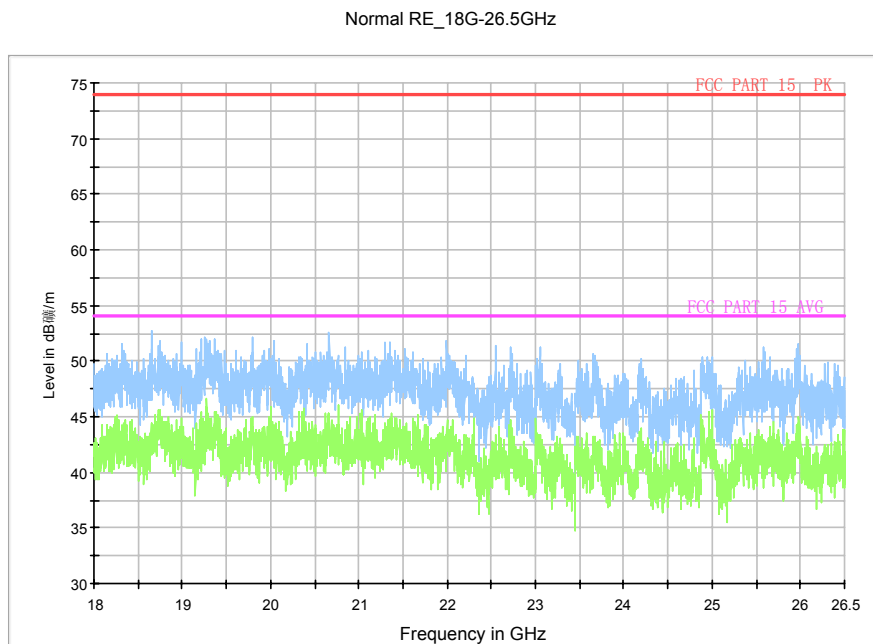


Fig.78. Radiated emission: $\pi/4$ DQPSK, 18 GHz - 26 GHz

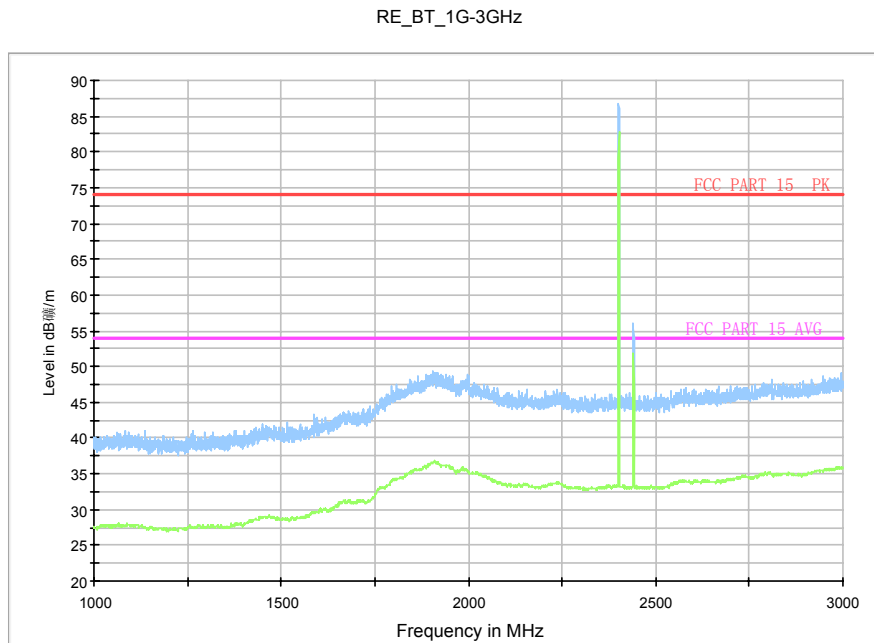


Fig.79. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

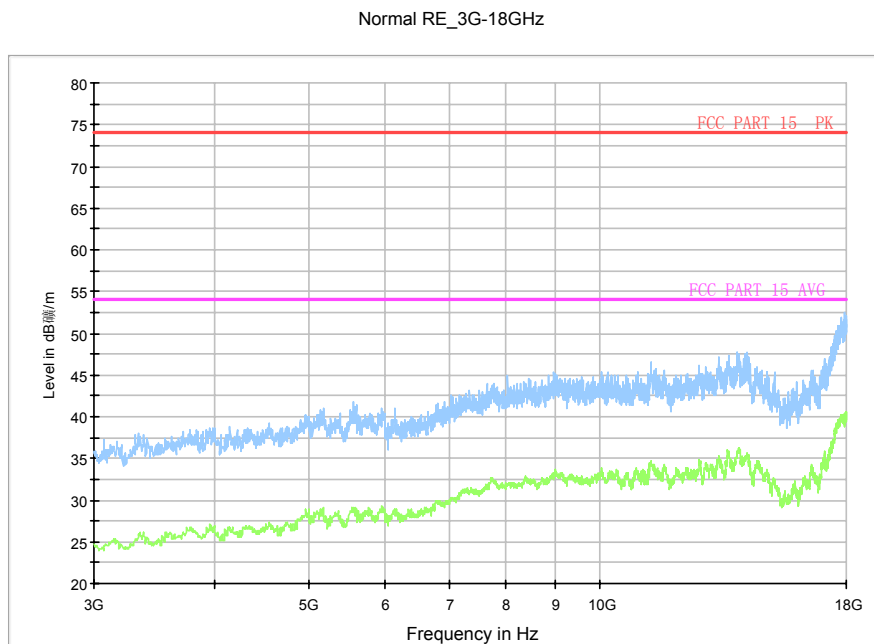


Fig.80. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz

Normal RE_30M-1GHz_10m

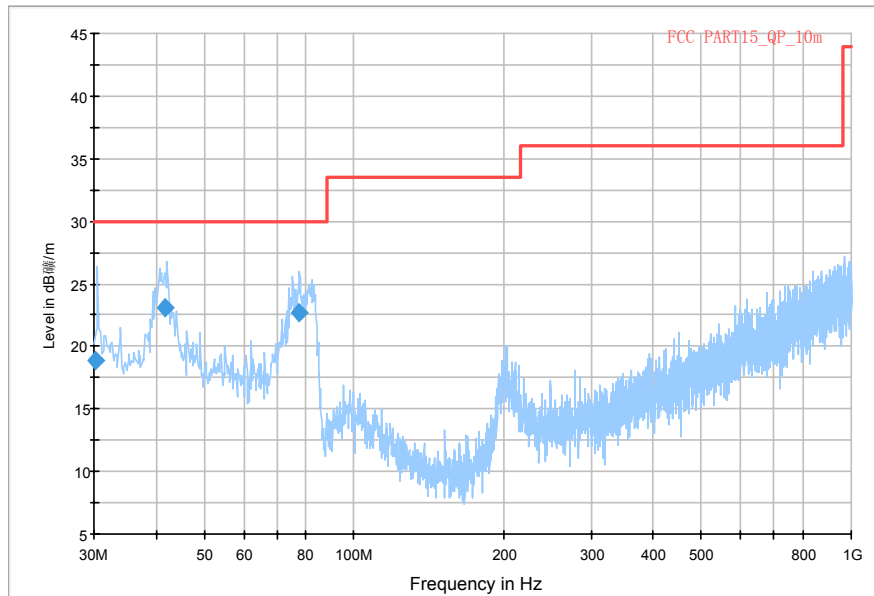


Fig.81. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

RE_BT_1G-3GHz

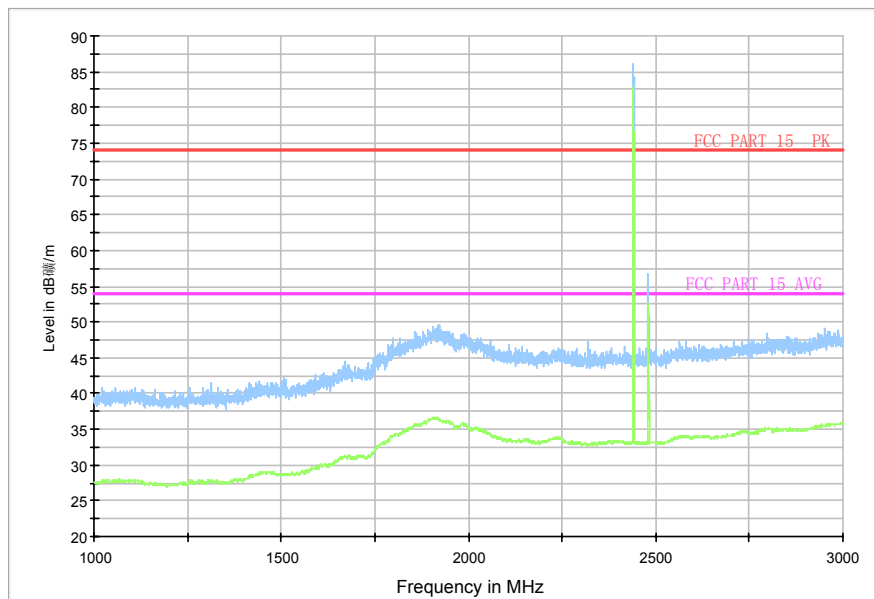


Fig.82. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

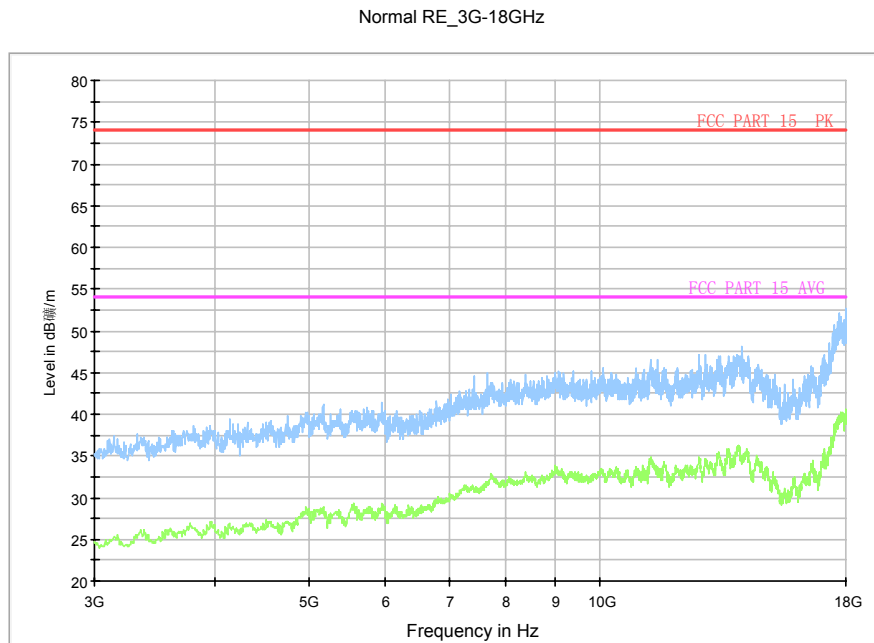


Fig.83. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

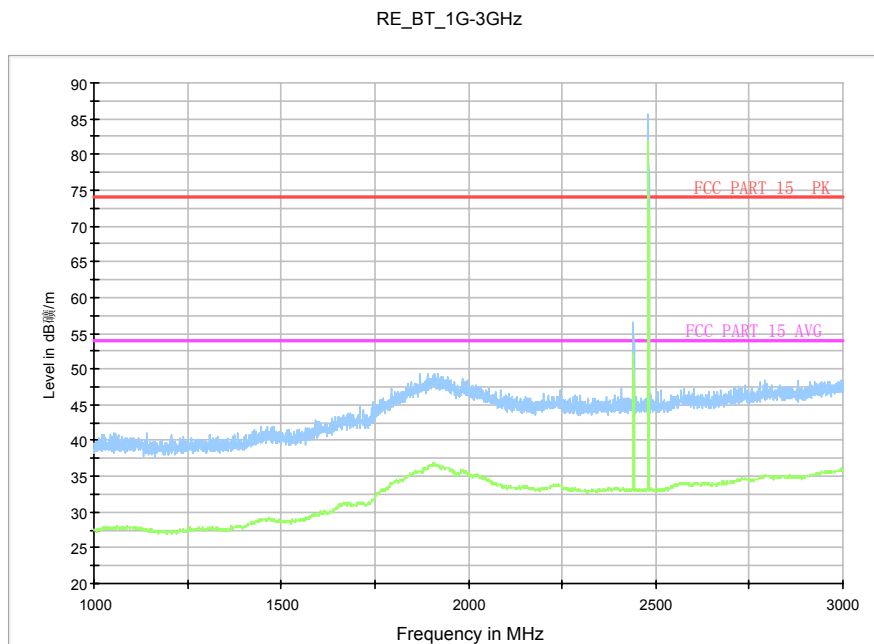


Fig.84. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

Normal RE_3G-18GHz

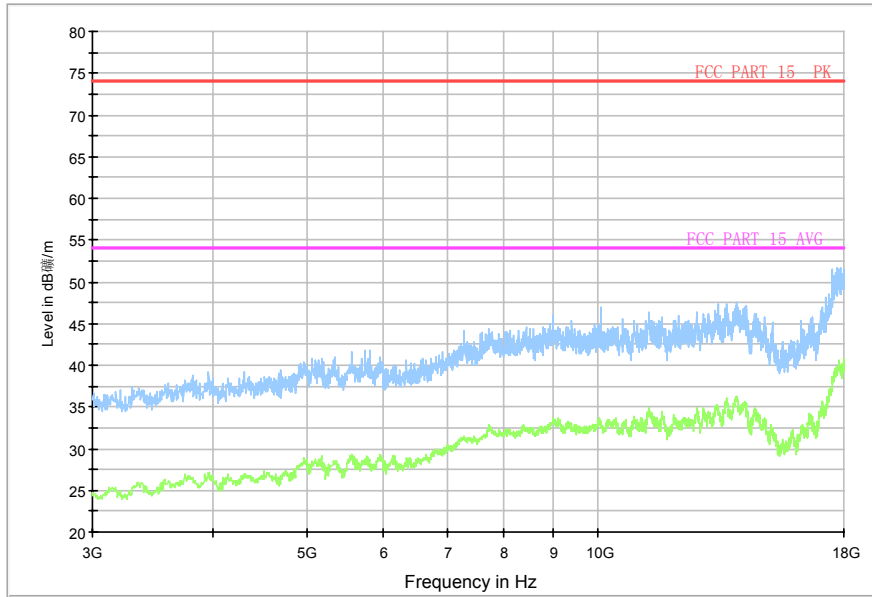


Fig.85. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

RE-BT-Power_2.38G-2.43GHz

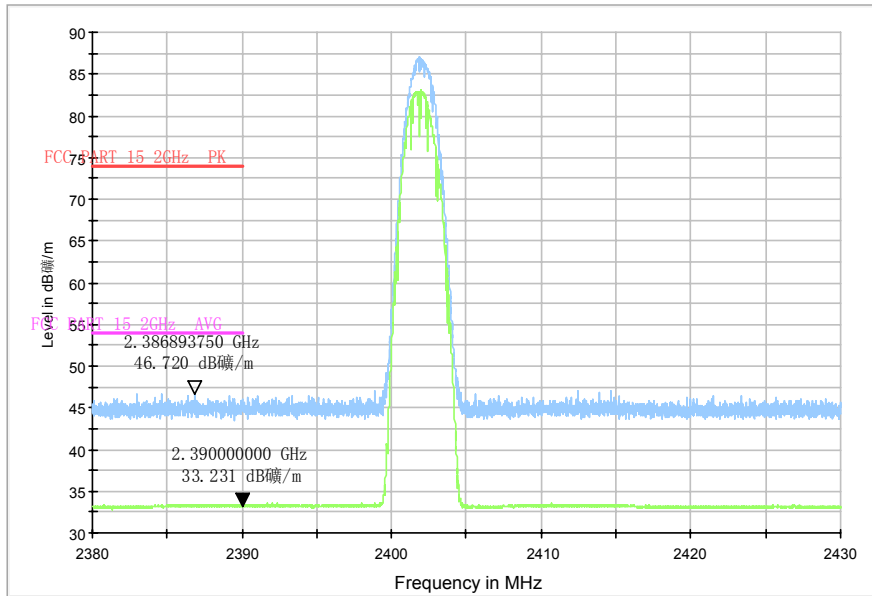


Fig.86. Radiated emission (Power): 8DPSK, low channel

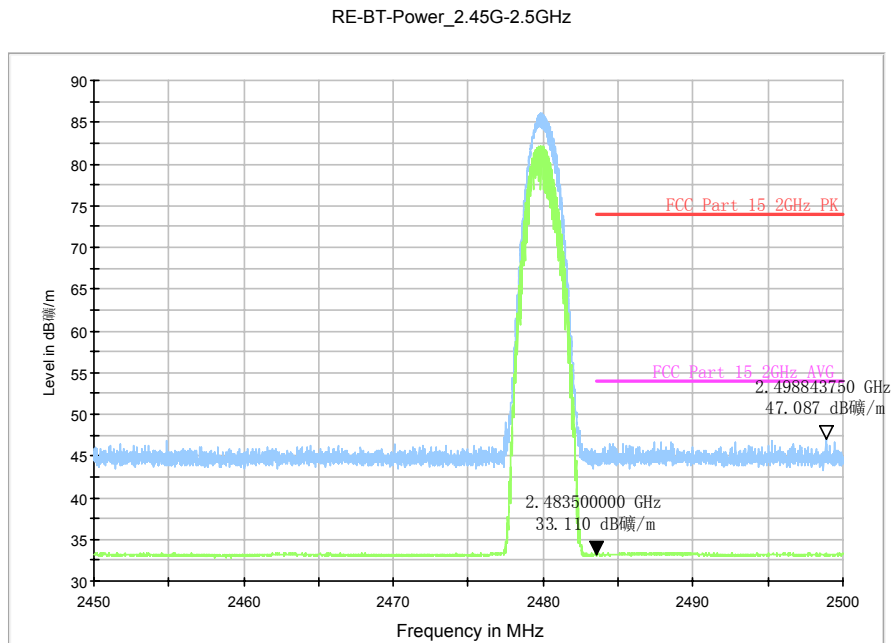


Fig.87. Radiated emission (Power): 8DPSK, high channel

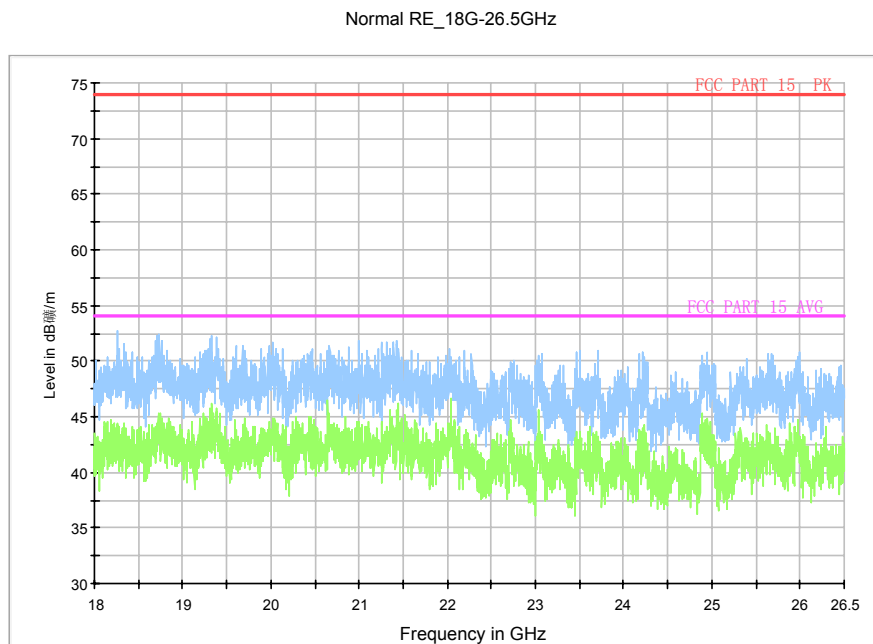


Fig.88. Radiated emission: 8DPSK, 18 GHz - 26 GHz

A.6. Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	< 400

The measurement is made according to ANSI C63.10

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.89	109.66	P
		Fig.90		
	DH3	Fig.91	174.90	P
		Fig.92		
	DH5	Fig.93	183.25	P
		Fig.94		

For $\pi/4$ DQPSK


Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.95	110.36	P
		Fig.96		
	DH3	Fig.97	177.12	P
		Fig.98		
	DH5	Fig.99	215.24	P
		Fig.100		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.101	107.71	P
		Fig.102		
	DH3	Fig.103	173.25	P
		Fig.104		
	DH5	Fig.105	209.80	P
		Fig.106		


Conclusion: PASS

Test graphs as below:

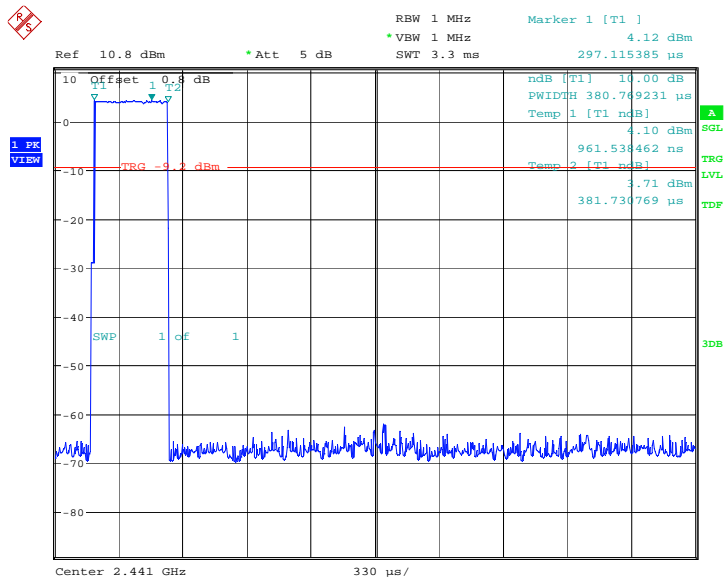


Date: 27.MAY.2014 11:21:44

Fig.89. Time of occupancy (Dwell Time): Channel 39, Packet DH1

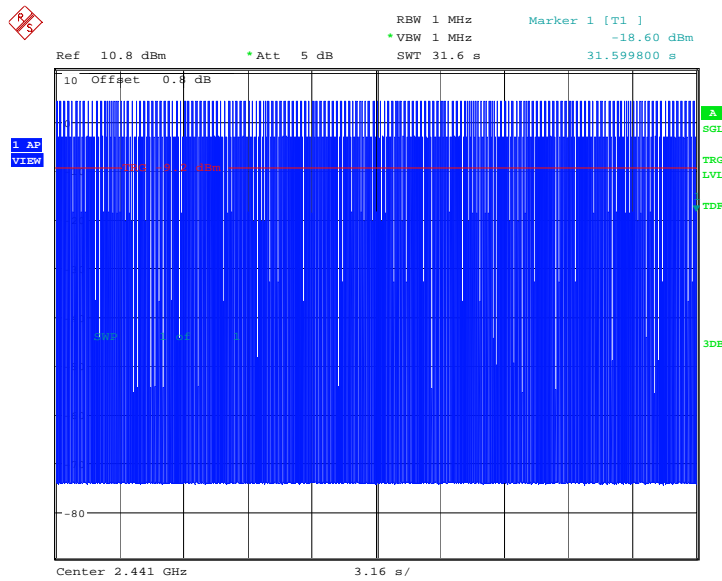


Date: 27.MAY.2014 11:21:33

Fig.90. Number of Transmissions Measurement: Channel 39, Packet DH1

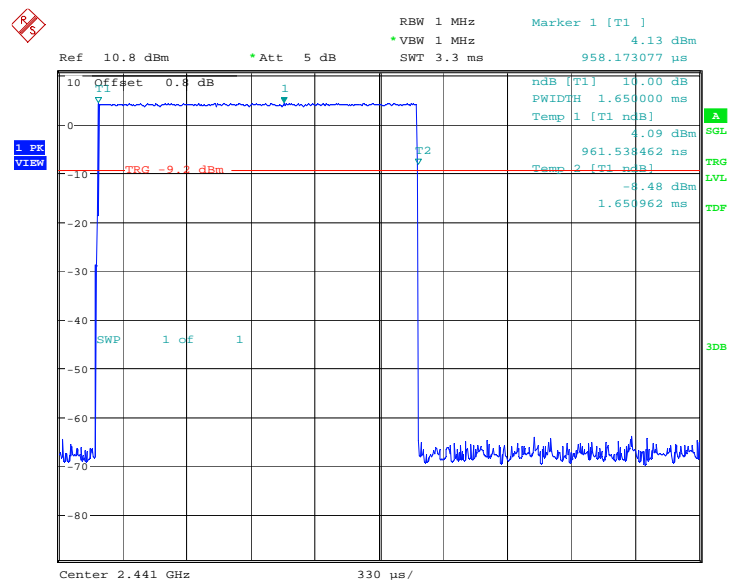


Date: 27.MAY.2014 11:23:05

Fig.91. Time of occupancy (Dwell Time): Channel 39, Packet DH3

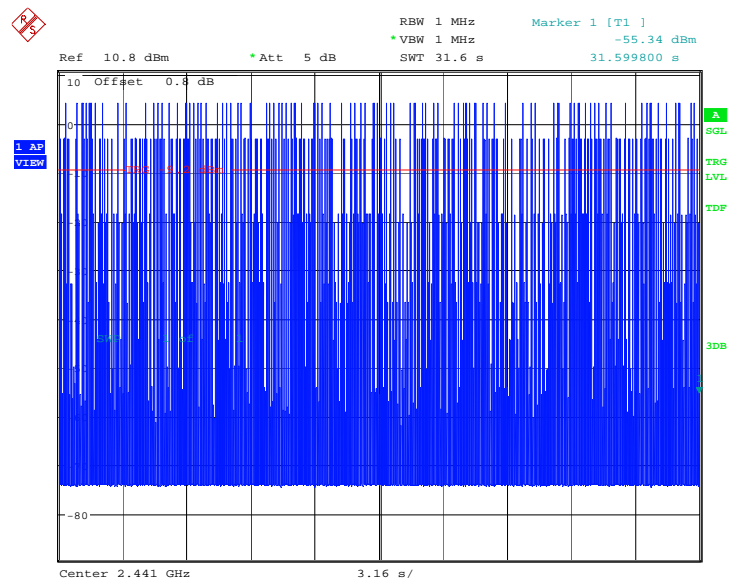


Date: 27.MAY.2014 11:22:53

Fig.92. Number of Transmissions Measurement:Channel 39,Packet DH3

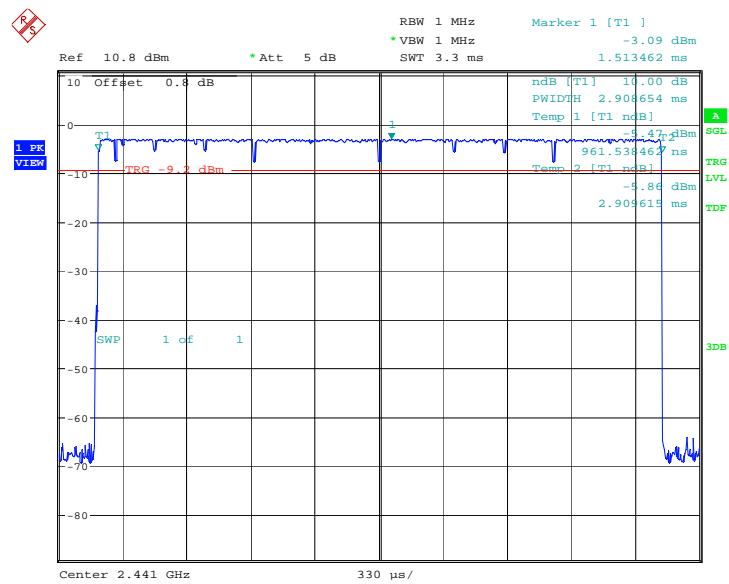


Date: 27.MAY.2014 11:24:22

Fig.93. Time of occupancy (Dwell Time): Channel 39, Packet DH5

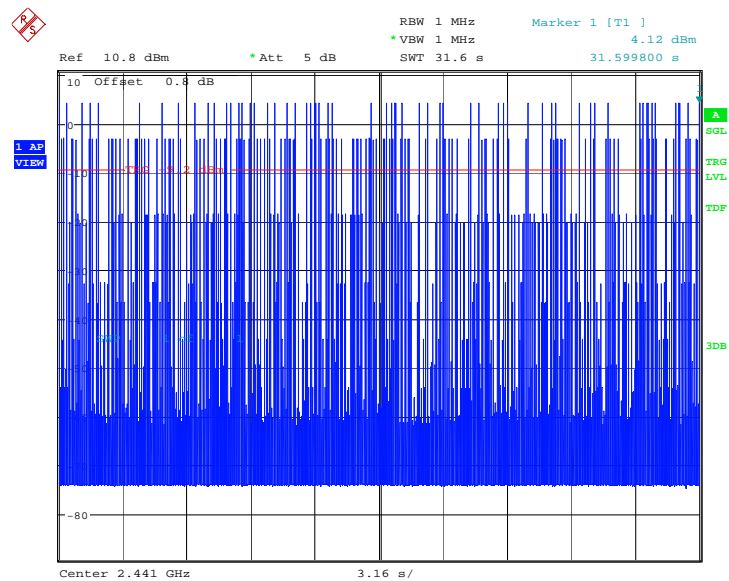


Date: 27.MAY.2014 11:24:10

Fig.94. Number of Transmissions Measurement: Channel 39, Packet DH5

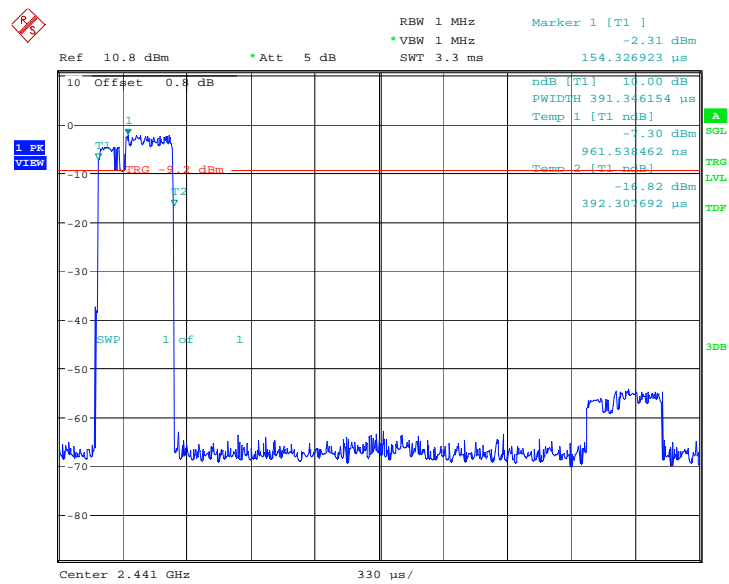


Date: 27.MAY.2014 11:43:15

Fig.95. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

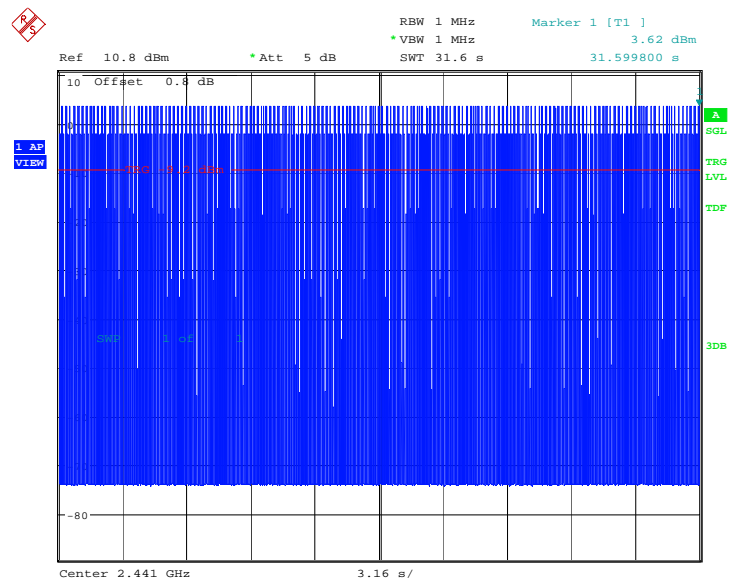


Date: 27.MAY.2014 11:43:03

Fig.96. Number of Transmissions Measurement: Channel 39, Packet 2-DH1

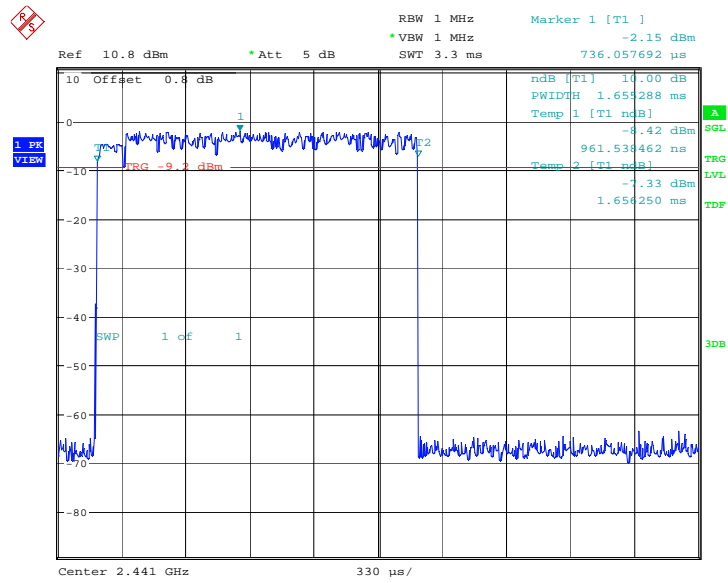


Date: 27.MAY.2014 11:44:35

Fig.97. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

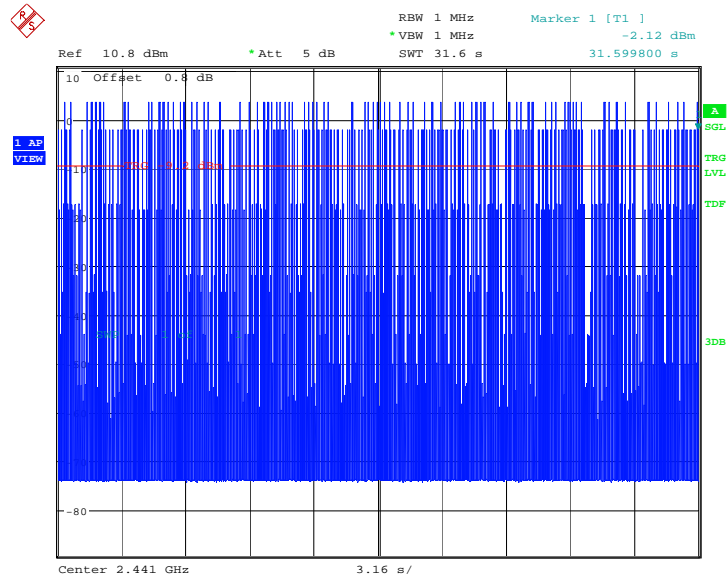


Date: 27.MAY.2014 11:44:23

Fig.98. Number of Transmissions Measurement: Channel 39, Packet 2-DH3

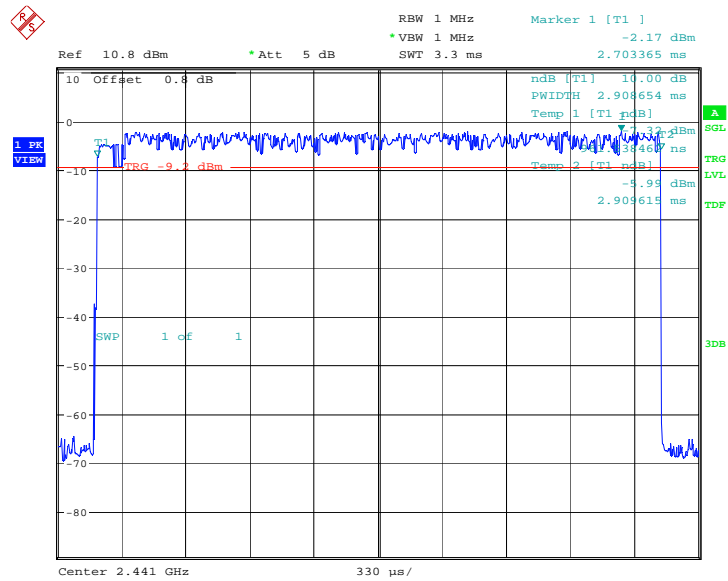


Date: 27.MAY.2014 11:45:53

Fig.99. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

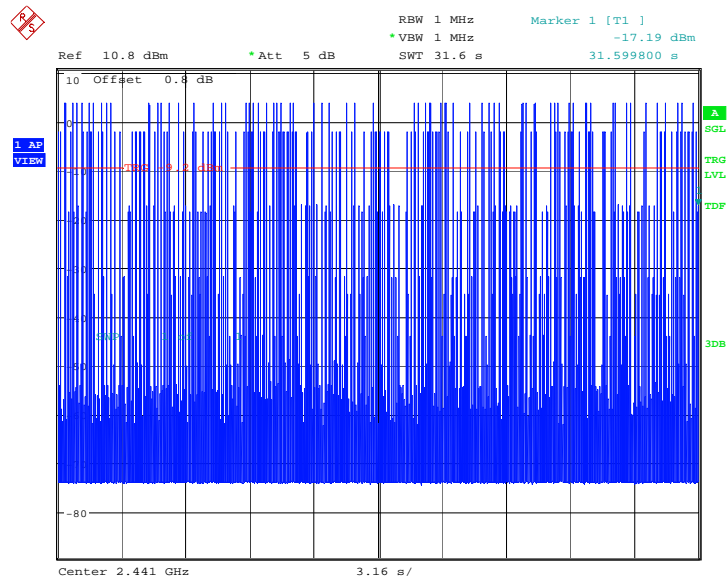


Date: 27.MAY.2014 11:45:41

Fig.100. Number of Transmissions Measurement:Channel 39,Packet 2-DH5

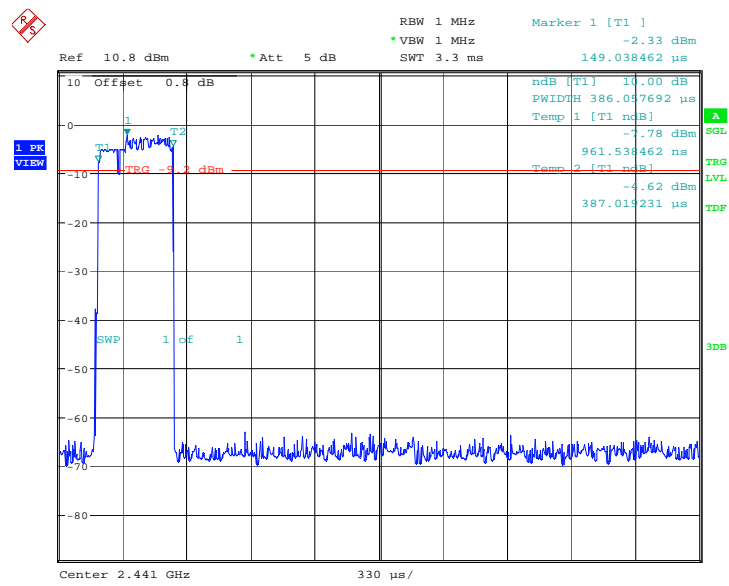


Date: 27.MAY.2014 12:04:41

Fig.101. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

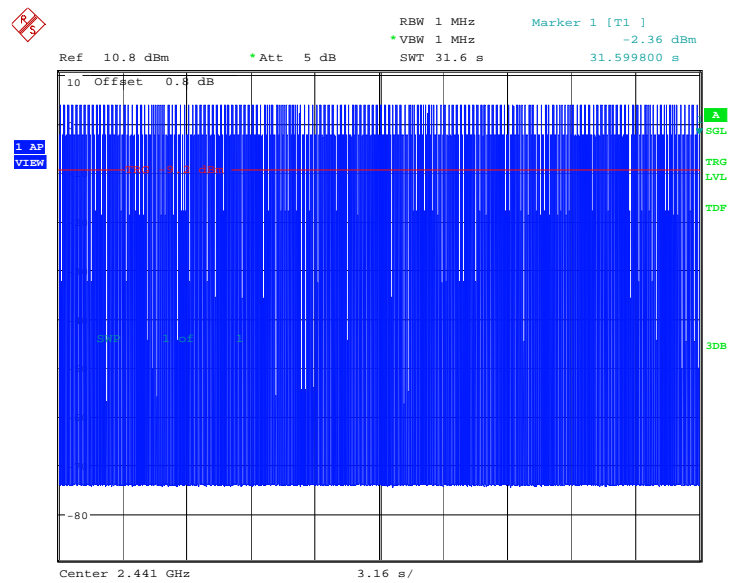


Date: 27.MAY.2014 12:04:29

Fig.102. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

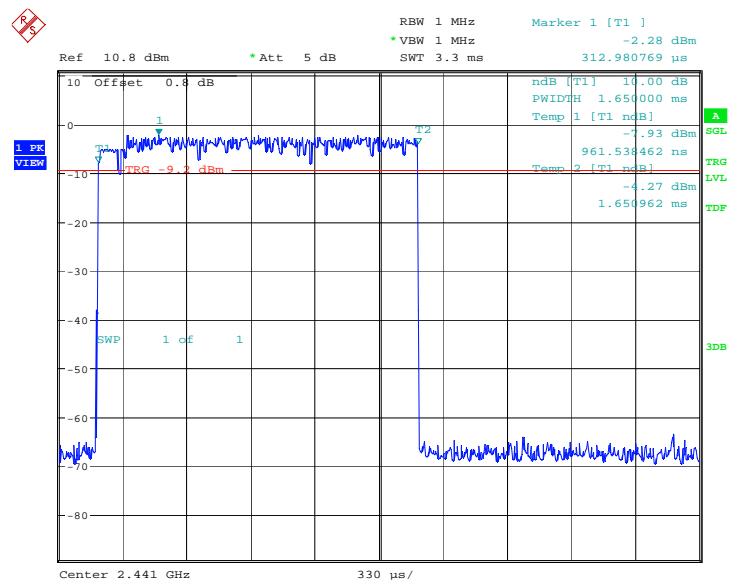


Date: 27.MAY.2014 12:05:58

Fig.103. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

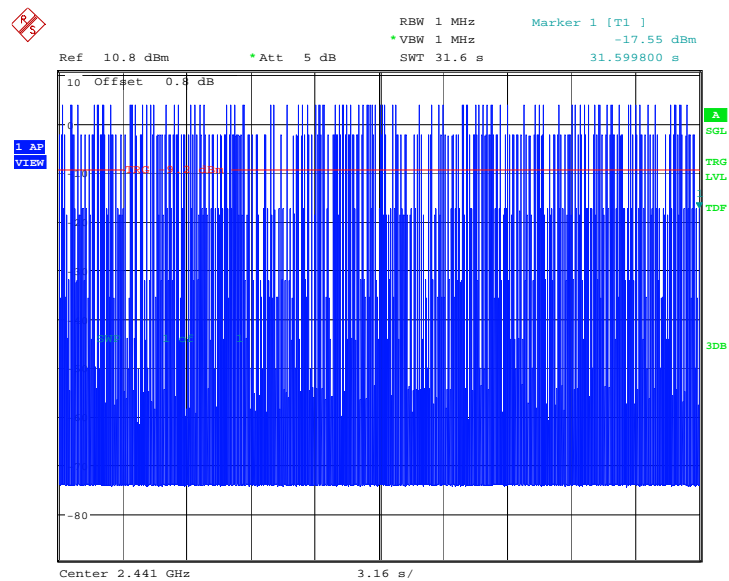


Date: 27.MAY.2014 12:05:46

Fig.104. Number of Transmissions Measurement:Channel 39,Packet 3-DH3

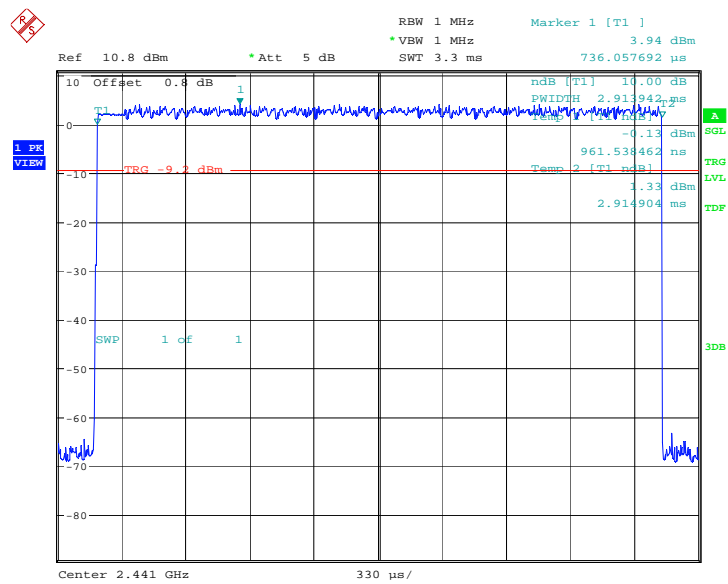

Date: 27.MAY.2014 12:07:16

Fig.105. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

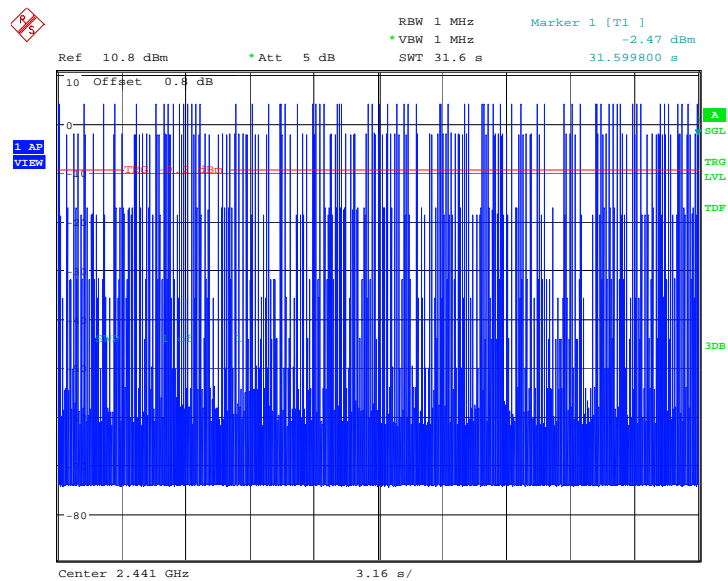

Date: 27.MAY.2014 12:07:04

Fig.106. Number of Transmissions Measurement:Channel 39,Packet 3-DH5

A.7. 20dB Bandwidth

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

The measurement is made according to ANSI C63.10

Test Condition

Hopping Mode	RBW	VBW	SPAN	Sweptime	Detector	Trace Mode
Hopping OFF	20KHz	100KHz	3MHz	Auto	Peak	Max Hold

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.107	865.38	NA
39	Fig.108	865.38	NA
78	Fig.109	865.38	NA

For $\pi/4$ DQPSK


Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.110	1264.42	NA
39	Fig.111	1269.23	NA
78	Fig.112	1264.42	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.113	1259.62	NA
39	Fig.114	1283.65	NA
78	Fig.115	1259.62	NA


Conclusion: NA

Test graphs as below:

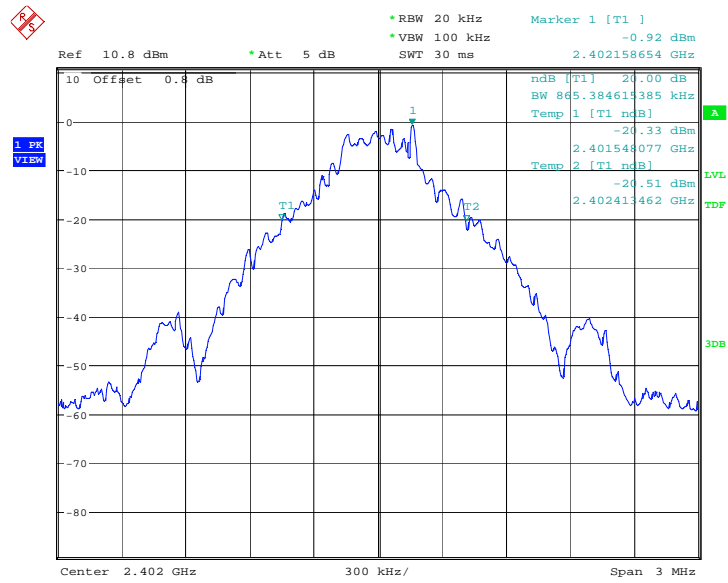


Date: 27.MAY.2014 11:24:56

Fig.107. 20dB Bandwidth: GFSK, Channel 0

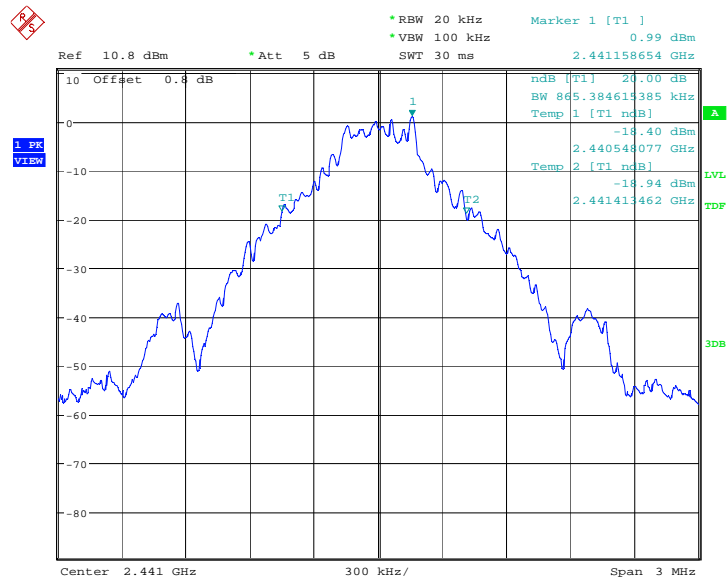


Date: 27.MAY.2014 11:25:28

Fig.108. 20dB Bandwidth: GFSK, Channel 39

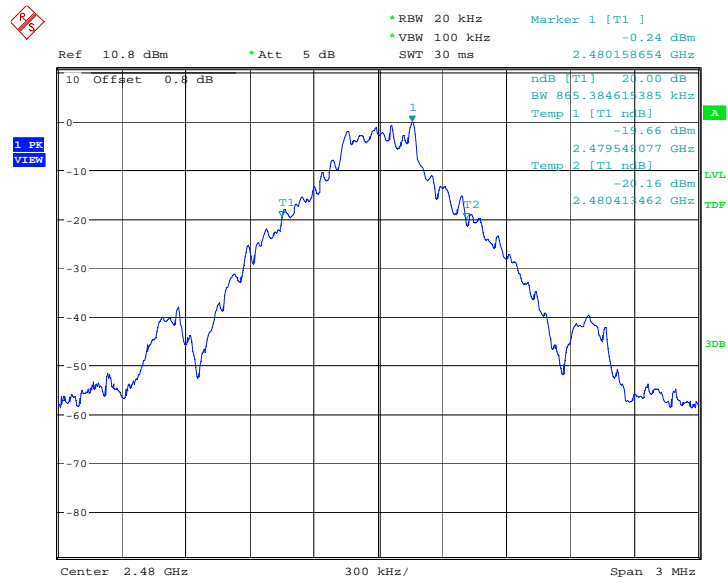


Date: 27.MAY.2014 11:26:00

Fig.109. 20dB Bandwidth: GFSK, Channel 78

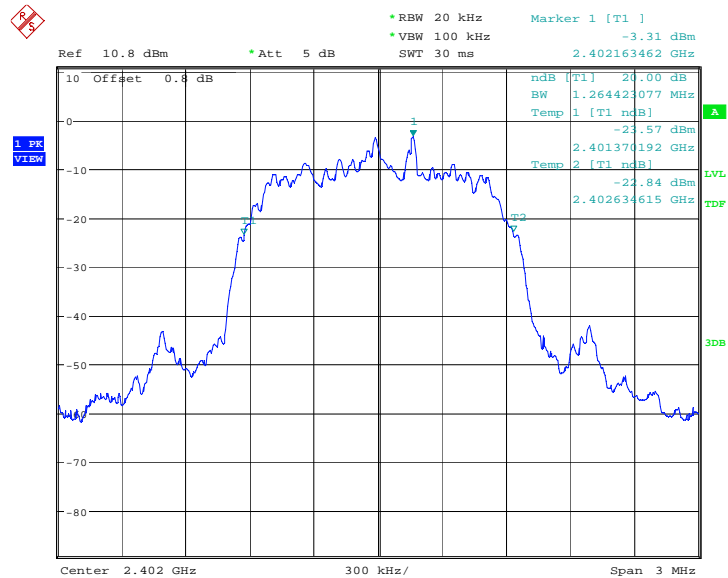


Date: 27.MAY.2014 11:46:26

Fig.110. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

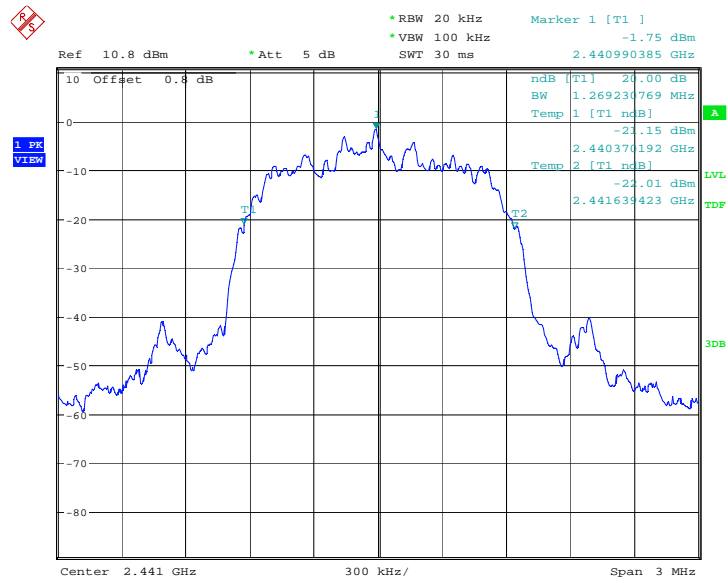


Date: 27.MAY.2014 11:46:58

Fig.111. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

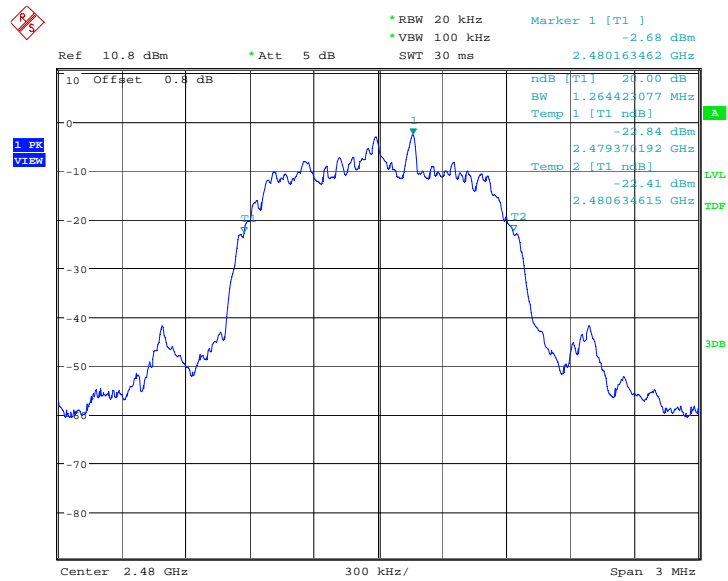


Date: 27.MAY.2014 11:47:30

Fig.112. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

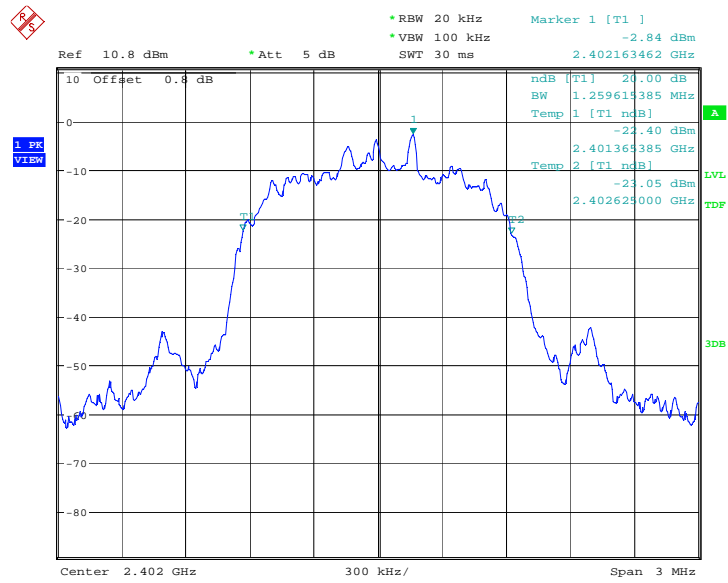


Date: 27.MAY.2014 12:07:50

Fig.113. 20dB Bandwidth: 8DPSK, Channel 0

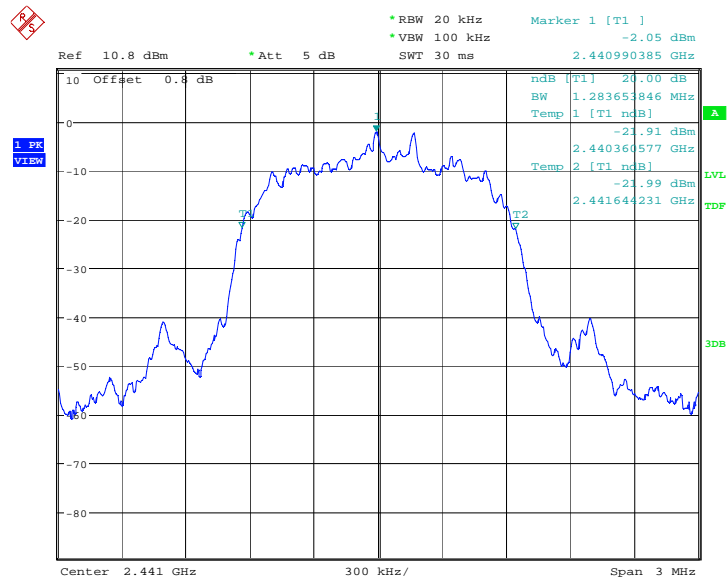

Date: 27.MAY.2014 12:08:22

Fig.114. 20dB Bandwidth: 8DPSK, Channel 39

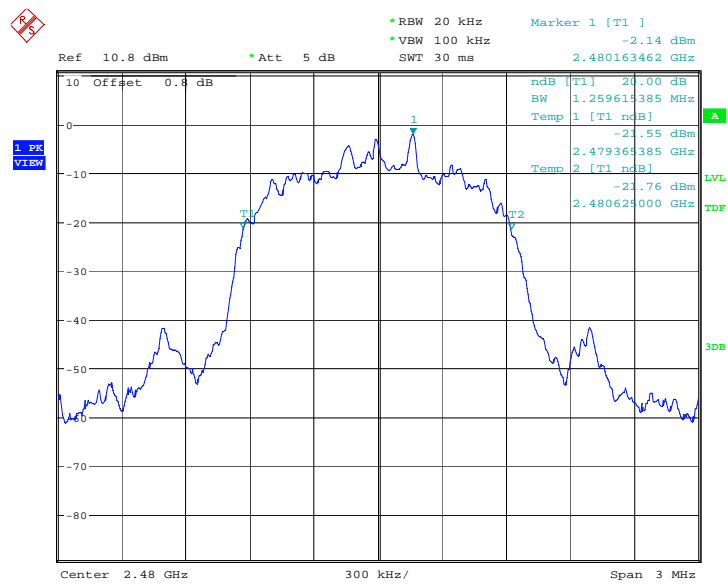

Date: 27.MAY.2014 12:08:54

Fig.115. 20dB Bandwidth: 8DPSK, Channel 78

A.8. Carrier Frequency Separation

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1) RSS-210 A8.1 (2)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

The measurement is made according to ANSI C63.10

Test Condition

Hopping Mode	RBW	VBW	SPAN	Sweptime	Detector	Trace Mode
Hopping ON	300KHz	1MHz	3MHz	Auto	Peak	Max Hold

Search the peak marks of the middle frequency and adjacent channel, the record the separation between them. This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.116	P

For $\pi/4$ DQPSK


Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.117	P

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion
39	Fig.118	P


Conclusion: PASS

Test graphs as below:

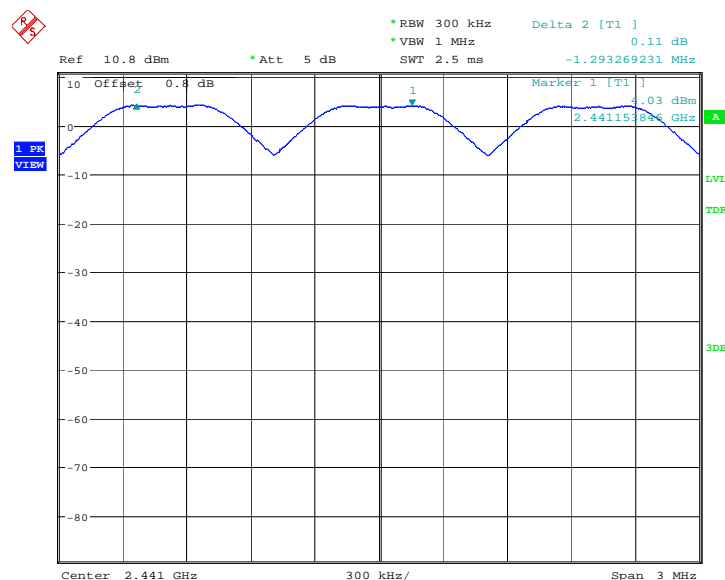


Date: 27.MAY.2014 11:28:04

Fig.116. Carrier frequency separation measurement: GFSK, Channel 39

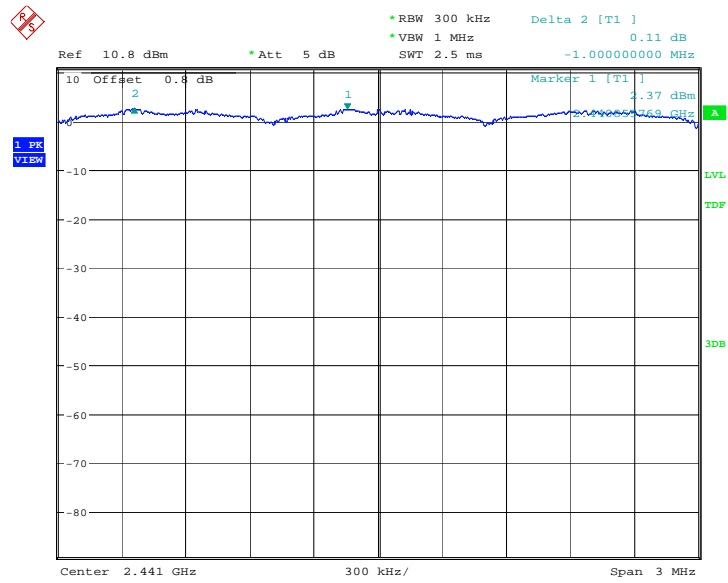

Date: 27.MAY.2014 11:49:34

Fig.117. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

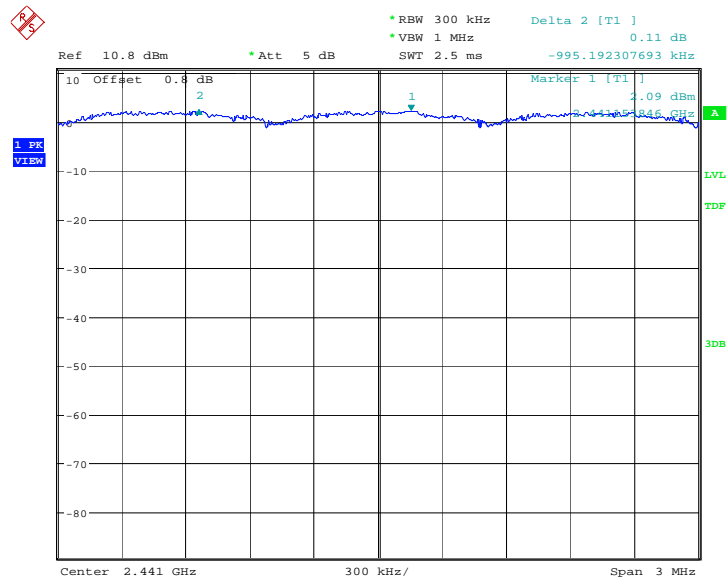

Date: 27.MAY.2014 12:10:58

Fig.118. Carrier frequency separation measurement: 8DPSK, Channel 39

A.9. Number of Hopping Channels

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	At least 15 non-overlapping channels

The measurement is made according to ANSI C63.10

Test Condition

Hopping Mode	RBW	VBW	Sweeptime	Detector	Trace Mode
Hopping ON	500KHz	500KHz	Auto	Peak	Max Hold

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.119	79 P
40~78	Fig.120	

For $\pi/4$ DQPSK


Channel	Number of hopping channels	Conclusion
0~39	Fig.121	79 P
40~78	Fig.122	

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.123	79 P
40~78	Fig.124	


Conclusion: PASS

Test graphs as below:

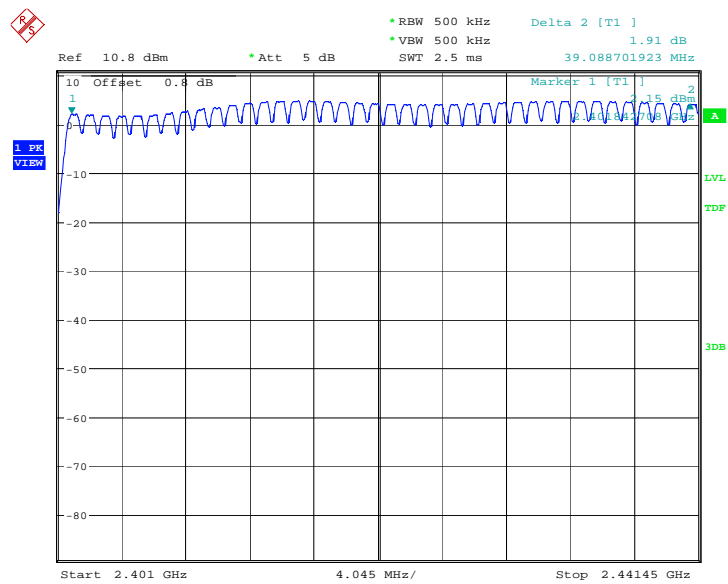


Date: 27.MAY.2014 11:30:09

Fig.119. Number of hopping frequencies: GFSK, Channel 0 - 39

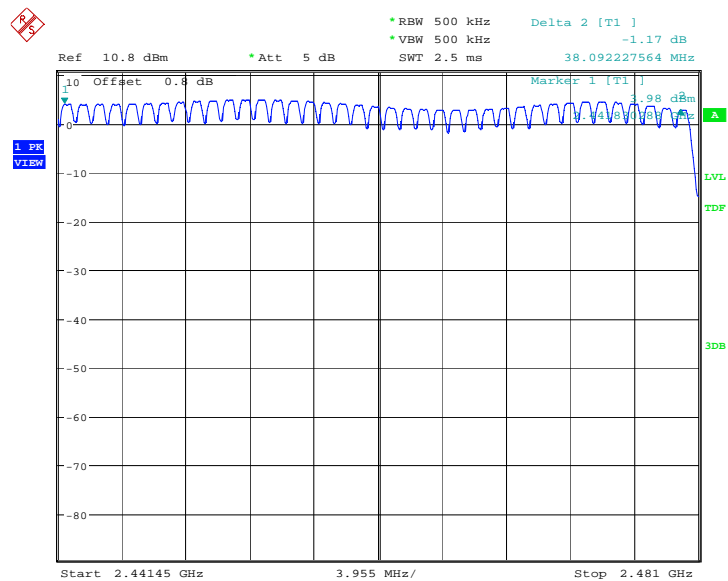


Date: 27.MAY.2014 11:32:11

Fig.120. Number of hopping frequencies: GFSK, Channel 40 - 78

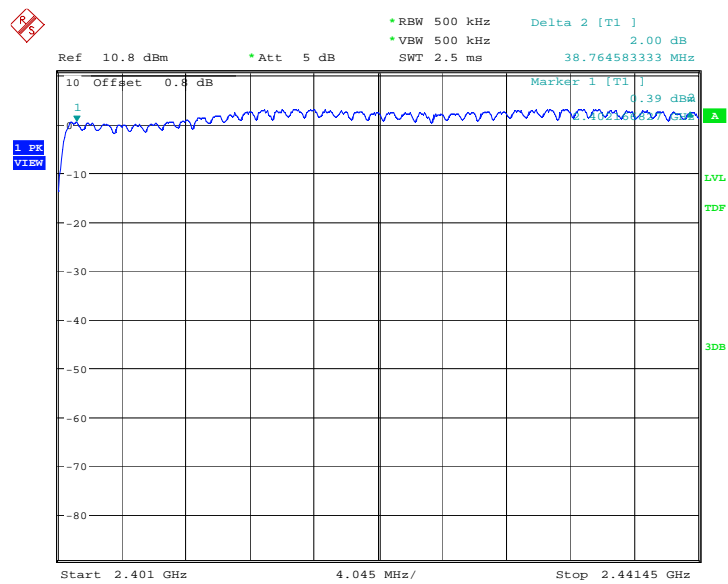


Date: 27.MAY.2014 11:51:39

Fig.121. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

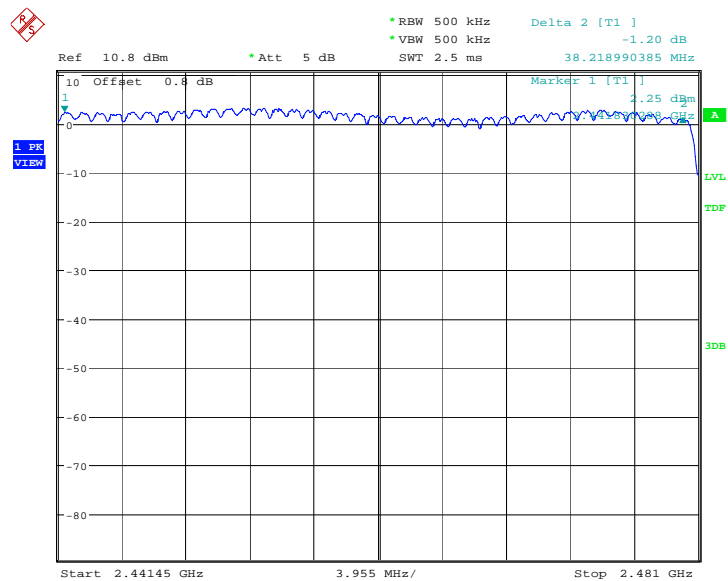


Date: 27.MAY.2014 11:53:41

Fig.122. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

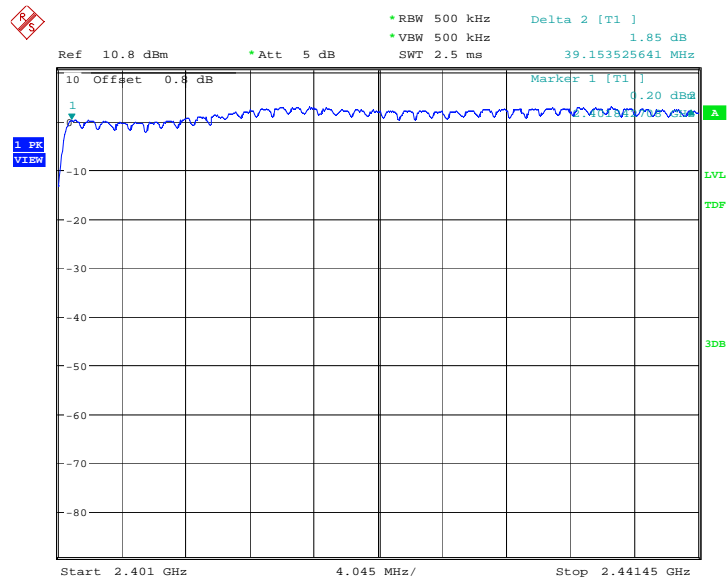

Date: 27.MAY.2014 12:13:02

Fig.123. Number of hopping frequencies: 8DPSK, Channel 0 - 39

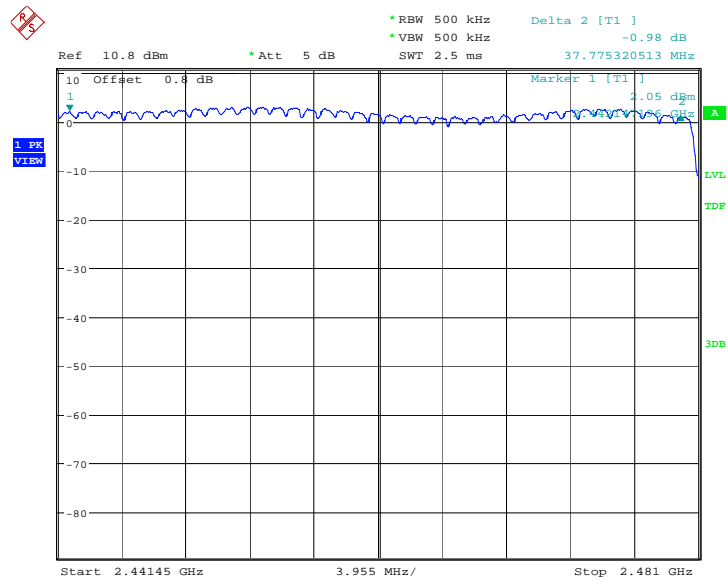

Date: 27.MAY.2014 12:15:04

Fig.124. Number of hopping frequencies: 8DPSK, Channel 40 - 78

A.10. AC Powerline Conducted Emission

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic:

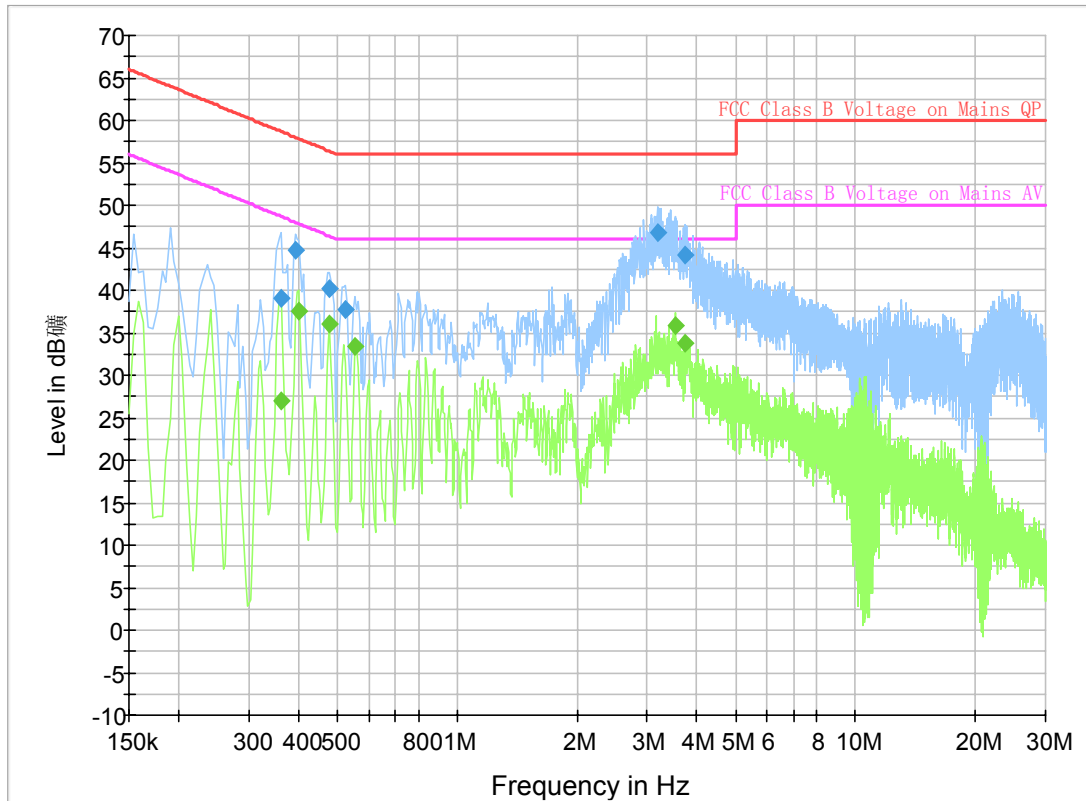


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.361500	39.1	GND	L1	9.8	19.6	58.7
0.393000	44.8	GND	L1	9.8	13.2	58.0
0.478500	40.1	GND	N	9.8	16.3	56.4
0.523500	37.8	GND	N	9.8	18.2	56.0
3.174000	46.8	GND	L1	9.7	9.2	56.0
3.745500	44.2	GND	L1	9.7	11.8	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.361500	27.1	GND	L1	9.8	21.6	48.7
0.402000	37.5	GND	L1	9.8	10.4	47.8
0.478500	36.0	GND	L1	9.8	10.4	46.4
0.555000	33.3	GND	L1	9.8	12.7	46.0
3.520500	35.8	GND	L1	9.7	10.2	46.0
3.718500	33.7	GND	L1	9.7	12.3	46.0

Idle:

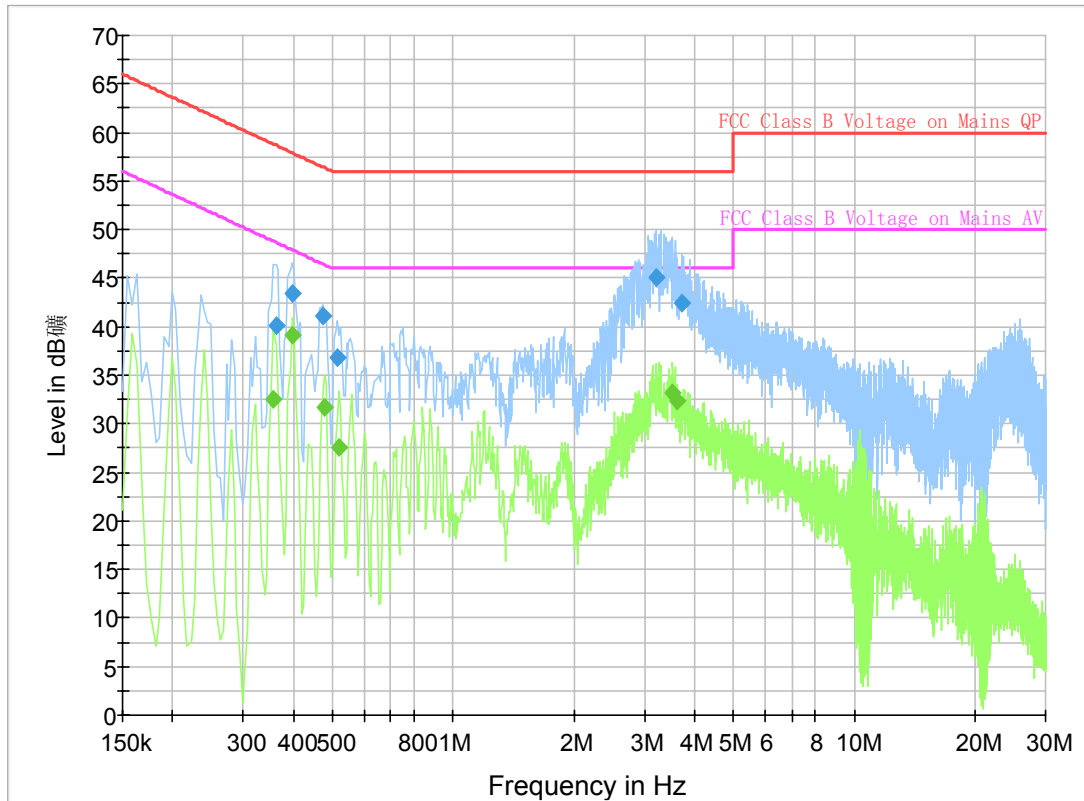

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.361500	40.2	GND	L1	9.8	18.5	58.7
0.397500	43.4	GND	L1	9.8	14.5	57.9
0.474000	41.2	GND	L1	9.8	15.3	56.4
0.514500	36.8	GND	N	9.8	19.2	56.0
3.214500	45.0	GND	L1	9.7	11.0	56.0
3.718500	42.5	GND	L1	9.7	13.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.357000	32.5	GND	L1	9.8	16.3	48.8
0.397500	39.1	GND	L1	9.8	8.8	47.9
0.478500	31.7	GND	L1	9.8	14.7	46.4
0.519000	27.5	GND	L1	9.8	18.5	46.0
3.534000	33.2	GND	L1	9.7	12.8	46.0
3.615000	32.3	GND	L1	9.7	13.7	46.0

A.11.Receiver Radiation Emission

Reference

FCC: CFR Part 15.109, 2.1053/ RSS-Gen 7.2.2

A.11.1 Method of Measurement

The measurement procedure in ANSI C63.10-2009 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.11.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 11.3 Measurement results

IF bandwidth: 120 kHz

Idle Mode: 30MHz-1GHz


Normal RE_30M-1GHz_10m

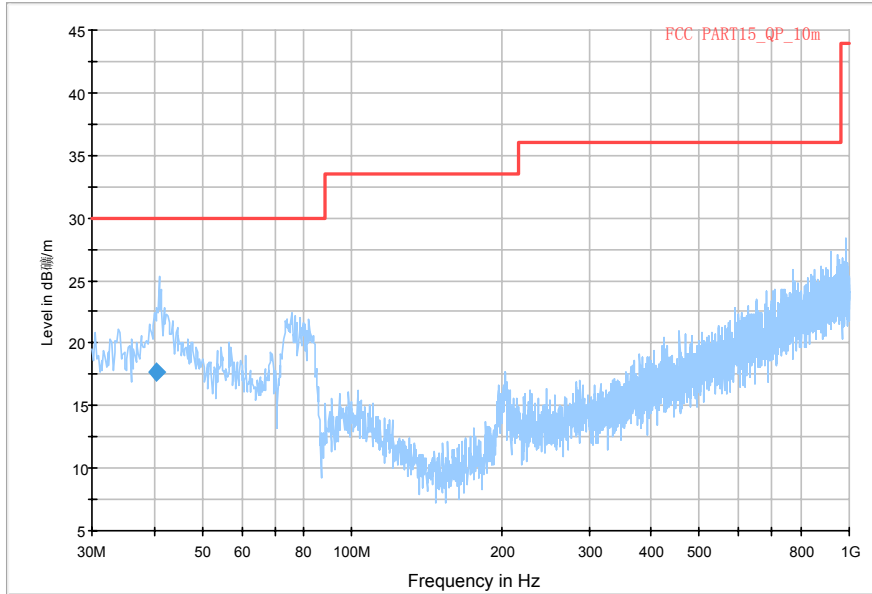

RBW / VBW 1 MHz

Idle Mode: 1GHz-3GHz

RE_BT_1G-3GHz

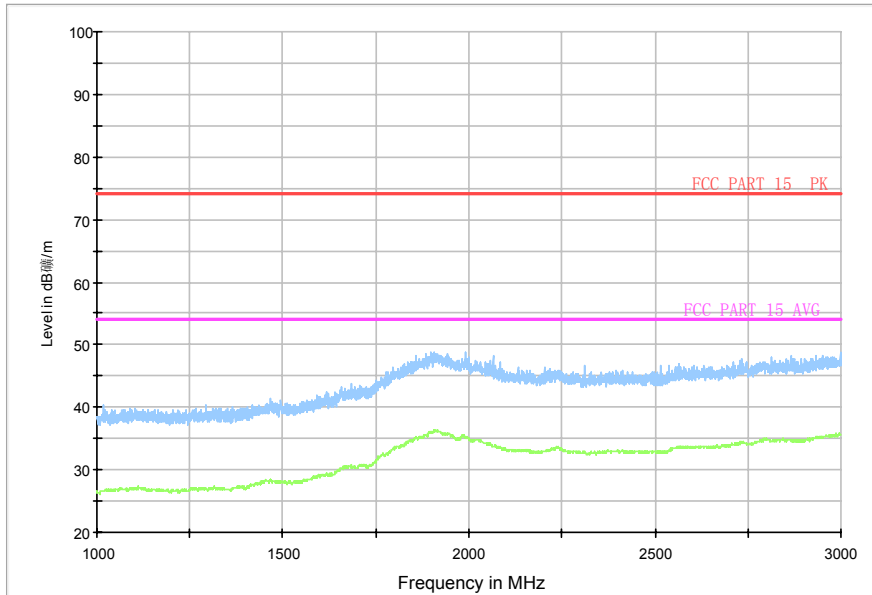

RBW / VBW 1 MHz

Idle Mode: 3GHz-18GHz

Normal RE_3G-18GHz

