



**FCC PART 15C  
TEST REPORT  
No. I14Z45965-GTE05**

**for**

**TCT Mobile Limited**

**HSDPA/HSUPA/HSPA+/UMTS Quad bands / GSM quad bands/LTE 5  
bands mobile phone**

**Model Name: EOS 4G BELL**

**Marketing Name: 6050A**

**FCC ID: RAD500**

**IC No. : 9238A-0034**

**Hardware Version: 02**

**Software Version: 7D1Q**

**Issued Date: 2014-06-18**



***DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629B-1***

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology  
Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191  
Tel:+86(0)10-62304633, Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
1.1. TESTING LOCATION .....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA .....	3
1.4. SIGNATURE.....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION .....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. NORMAL ACCESSORY SETTING.....	6
3.5. GENERAL DESCRIPTION.....	6
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
6.1. SUMMARY OF TEST RESULTS.....	9
6.2. STATEMENTS.....	9
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>11</b>
A.1. MEASUREMENT METHOD .....	11
A.2. PEAK OUTPUT POWER - CONDUCTED .....	12
A.3. FREQUENCY BAND EDGES - CONDUCTED.....	13
A.4. CONDUCTED EMISSION.....	15
A.5. RADIATED EMISSION.....	24
A.6. 6dB BANDWIDTH.....	32
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	35
A.8. AC POWERLINE CONDUCTED EMISSION.....	38
A.9. RECEIVER RADIATION EMISSION.....	41

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,  
Beijing, P.R.China  
Postal Code: 100191  
Telephone: 0086 1062304633  
Fax: 0086 1062304633-2504


### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data

Project Leader: Zi Xiaogang  
Testing Start Date: 2014-05-27  
Testing End Date: 2014-06-18

### 1.4. Signature




---

**Zi Xiaogang**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shangh ai  
Postal Code: 201203  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email zhizhou.gong@jrdcom.com  
Telephone: 0086 -21-61460890  
Fax: 0086 -21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China.  
City: Shangh ai  
Postal Code: 201203  
Country: China  
Telephone: 0086 -21-61460890  
Fax: 0086 -21-61460602

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	HSDP	A/HSUPA/HSPA+/UMTS Quad bands / GSM quad bands/LTE 5 bands mobile phone
Model Name		EOS 4G BELL
Marketing Name		6050A
FCC ID		RAD500
IC Number		9238A-0034
Frequency Band		ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)		GFSK
Number of Channels(LE mode)		40
Power Supply		3.8V DC by Battery

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT13a 0141	03000011706	02	7D1Q
UT19a 0141	03000011995	02	7D1Q

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	Inbuilt
AE2	Battery	/	Inbuilt
AE3	Travel charger	/	TCT-CHR-1011
AE4	USB cable	/	TCT-DC-0549
AE5	USB cable	/	/
AE1			
	Model CAB20000	13C2	
	Manufacturer	SCUD	
	Capacitance 2150	mAh	
	Nominal voltage	3.8 V	
AE2			
	Model	CAB2000010C1	
	Manufacturer	/	
	Capacitance /		
	Nominal voltage	/	
AE3			
	Model	CBA3000AG0C1	
	Manufacturer	TEN PAO	
	Length of cable	/	
AE4			

Model	CDA3122002C1
Manufacturer	JUWEI
Length of cable	102cm
AE5	
Model	CDA0000026C2
Manufacturer	Shenghua
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. Normal Accessory setting**

Fully charged battery is used during the test.

### **3.5. General Description**

The Equipment Under Test (EUT) is a model of HSDPA/HSUPA/HSPA+ /UMTS Quad bands / GSM quad bands/LTE 5 bands with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	10-1-13
FCC Part15	15.209 Radiated emission limits, general requirements;	
	15.247 Operation within the bands 902–928MHz,	
	2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	2009
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations	10–1–13
	Spectrum Management and Telecommunications - Radio Standards Specification	
RSS - Gen	General Requirements and Information for the Certification of Radiocommunication Equipment	Issue3
RSS -210	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment	Issue8

## 5. LABORATORY ENVIRONMENT

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz



## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by TMC

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	IC	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	RSS-210 A8.4 (2)	<b>P</b>
Frequency Band Edges	15.247 (d)	RSS-210 A8.5	<b>P</b>
Conducted Emission	15.247 (d)	RSS-210 A8.5	<b>P</b>
Radiated Emission	15.247, 15.205, 15.209	RSS-210 A8.5	<b>P</b>
6dB Bandwidth	15.247 (a)(2)	RSS-210 A8.2	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	RSS-210 A8.2	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	RSS-Gen 7.2.2	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 6.2. S tatements

TMC has evaluated the test cases requested by the applicant /manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 7. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2015-06-11

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2014-11-05
2	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2014-07-13
3	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20
4	Dual-Ridge Waveguide Horn Antenna	3116 2663		ETS-Lindgren	2014-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116 2661		ETS-Lindgren	2014-06-30
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	2014-09-15
7	LISN	NV216	101200	R&S	2014-07-11
8	Pre-amplifier (18GHz)	HFH2-Z2	829324/007	Rohde & Schwarz	2014-12-12
9	Pre-amplifier (26.5GHz)	SCU18	1005277	Rohde & Schwarz	/
10	Loop Antenna	SCU26	1006788	Rohde & Schwarz	/

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3 m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

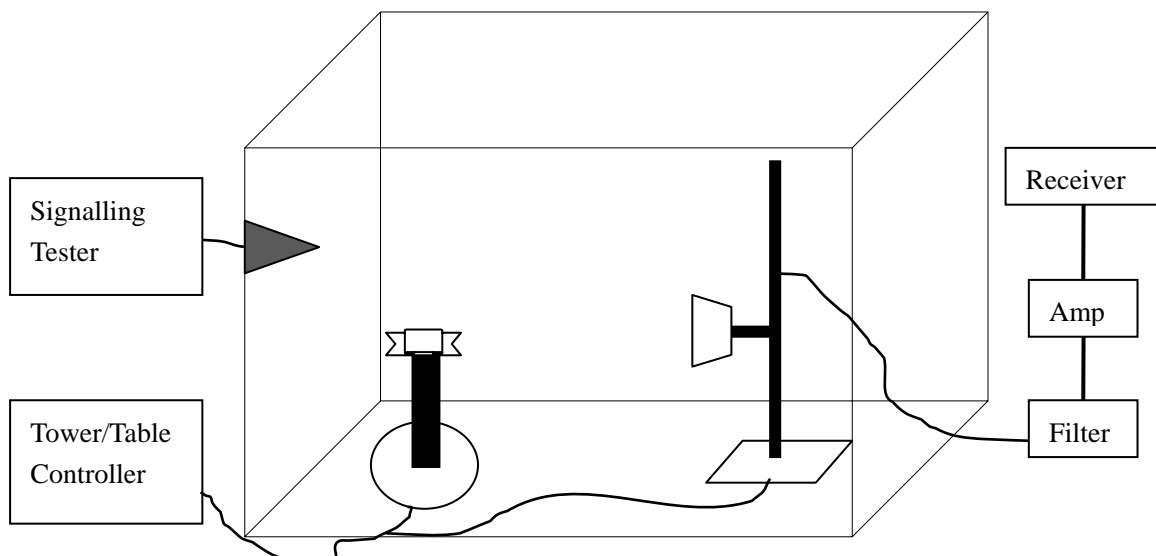

**A.2. Peak Output Power - Conducted**  
**Measurement Limit:**

Standard Limit	(dBm)
FCC Part 15.247(b)(1)	< 30

The measurement is made according to ANSI C63.10.

**Test Condition**

Hopping Mode	RBW	VBW	Span	Sweeptime	Detector	Trace Mode
Hopping OFF	1MHz	5MHz	0	5ms	Peak	Max Hold

**Measurement Results:**

**For GFSK**

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	0.55	1.49	1.12	P

**Conclusion: PASS**

### A.3. Frequency Band Edges - Conducted

#### Measurement Limit:

Standard Limit	(dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.10.

#### Test Condition

Hopping Mode	RBW	VBW	Span	Sweeptime	Detector	Trace Mode
Hopping OFF	100KHz	300KHz	8MHz	5ms	Peak	Max Hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.


#### Measurement Result:

##### For GFSK

Frequency	Hopping	Band Edge Power ( dBc)	Conclusion
2402MHz	Hopping OFF	Fig.1	P
2480MHz	Hopping OFF	Fig.2	P


#### Conclusion: PASS

#### Test graphs as below

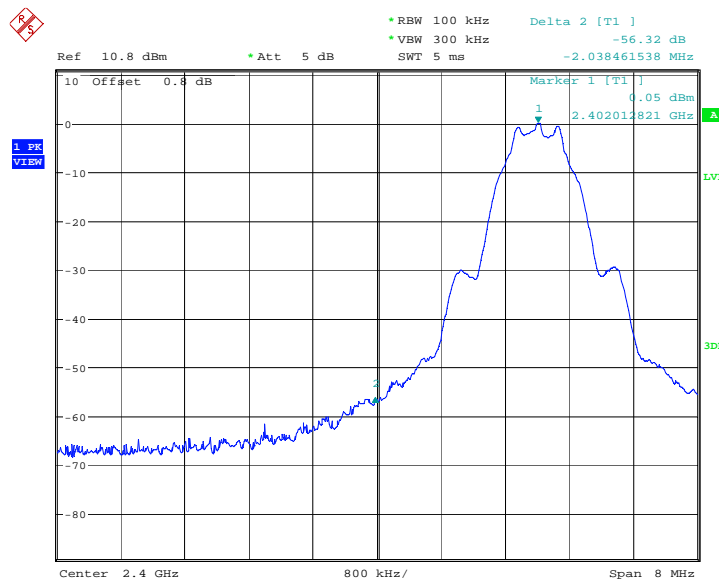

Date: 27.MAY.2014 09:19:09

Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

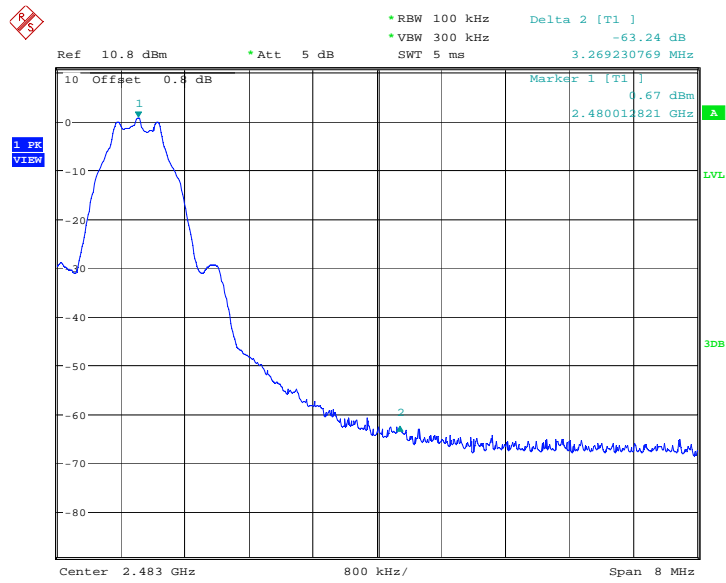

Date: 27.MAY.2014 09:27:46

Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

#### A.4. Conducted Emission

##### Measurement Limit:

Standard Limit	
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.10.

##### Test Condition

Hopping Mode	RBW	VBW	Sweeptime	Detector	Trace Mode
Hopping OFF	100KHz	300KHz	Auto	Peak	Max Hold

##### Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

##### Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

**Measurement Results:  
For GFSK**

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	Center Frequency	Fig.3	P
	30 MHz ~ 1 GHz	Fig.4	P
	1 GHz ~ 3 GHz	Fig.5	P
	3 GHz ~ 10 GHz	Fig.6	P
	10GHz ~ 26 GHz	Fig.7	P
2440 MHz	Center Frequency	Fig.8	P
	30 MHz ~ 1 GHz	Fig.9	P
	1 GHz ~ 3 GHz	Fig.10	P
	3 GHz ~ 10 GHz	Fig.11	P
	10GHz ~ 26 GHz	Fig.12	P
2480 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**


**Test graphs as below**

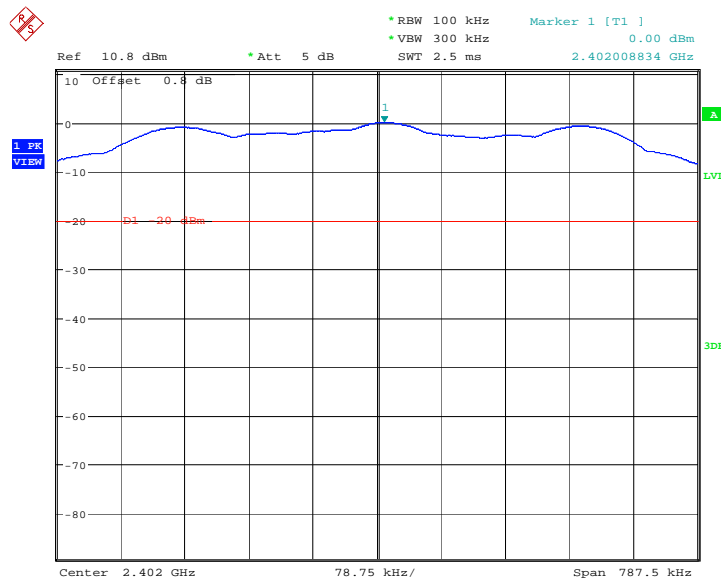

Date: 27.MAY.2014 09:17:28


Fig.3. Conducted spurious emission: GFSK,2402MHz



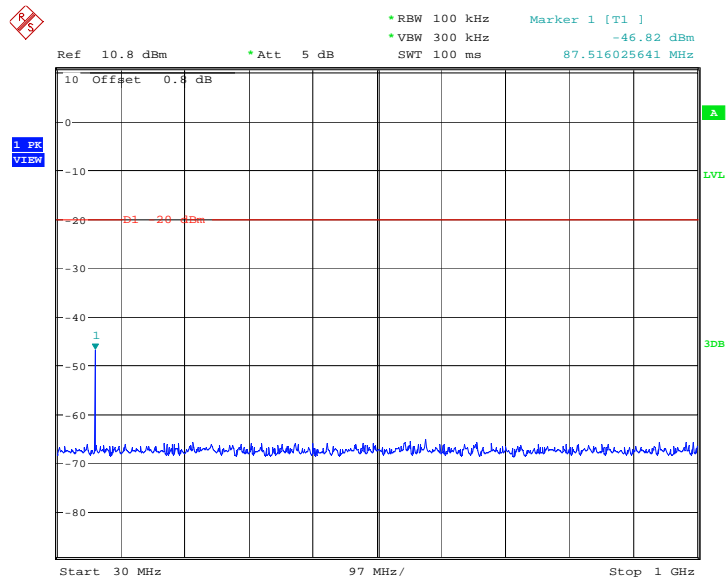


Date: 27.MAY.2014 09:17:44

Fig.4. Conducted spurious emission: GFSK, 2402 MHz, 30MHz - 1GHz

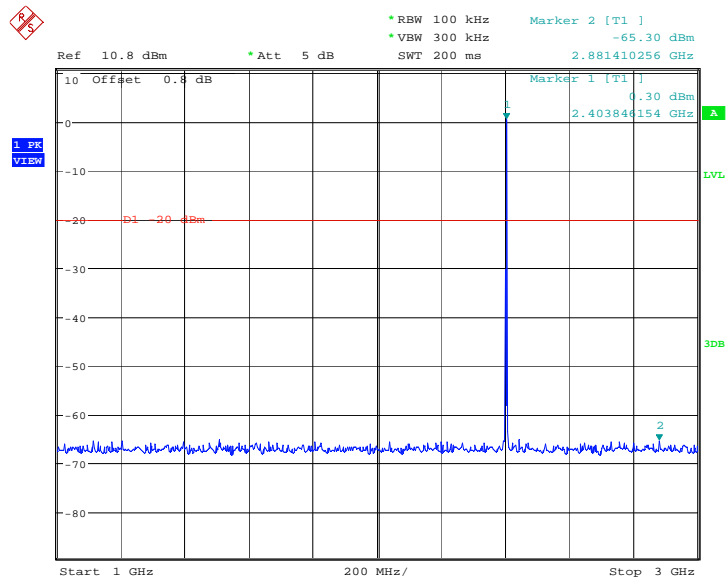


Date: 27.MAY.2014 09:18:16

Fig.5. Cond ucted spurious emission: GFSK, 2402 MHz, 1GHz - 3GHz

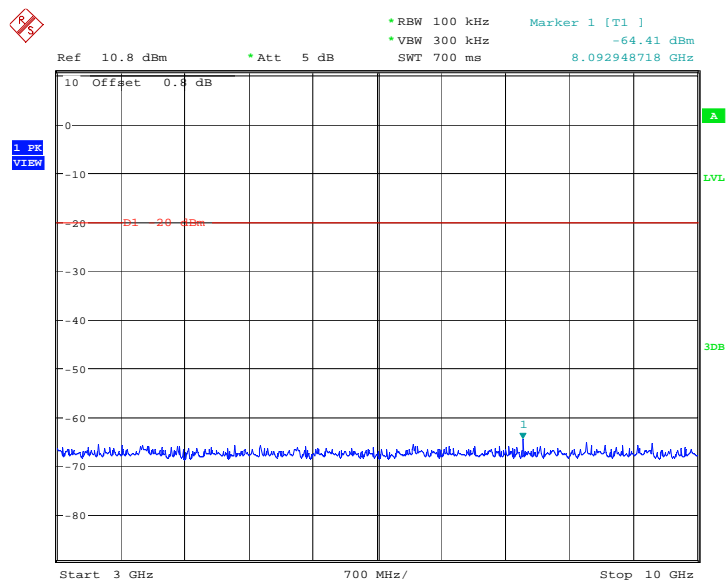


Date: 27.MAY.2014 09:18:33

Fig.6. Conducted spurious emission: GFSK, 2402 MHz, 3GHz - 10GHz

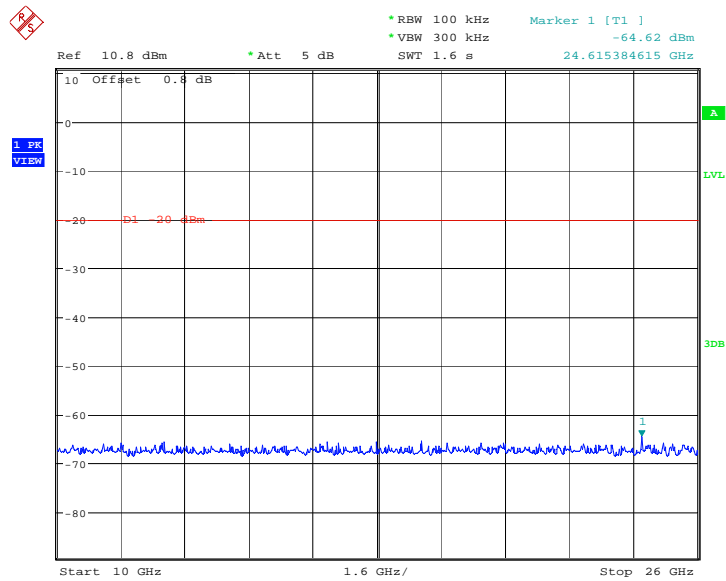


Date: 27.MAY.2014 09:18:49

Fig.7. Conducted spurious emission: GFSK, 2402 MHz, 10GHz - 26GHz

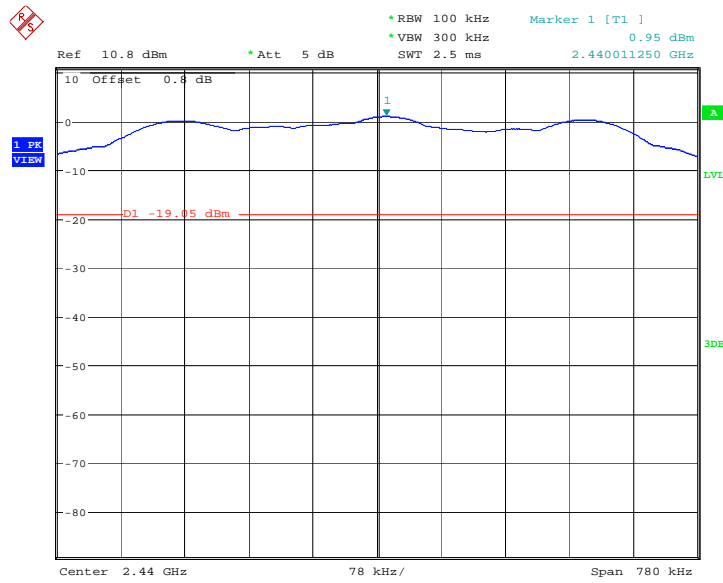


Date: 27.MAY.2014 09:22:56

Fig.8. Conducted spurious emission: GFSK, 2440MHz

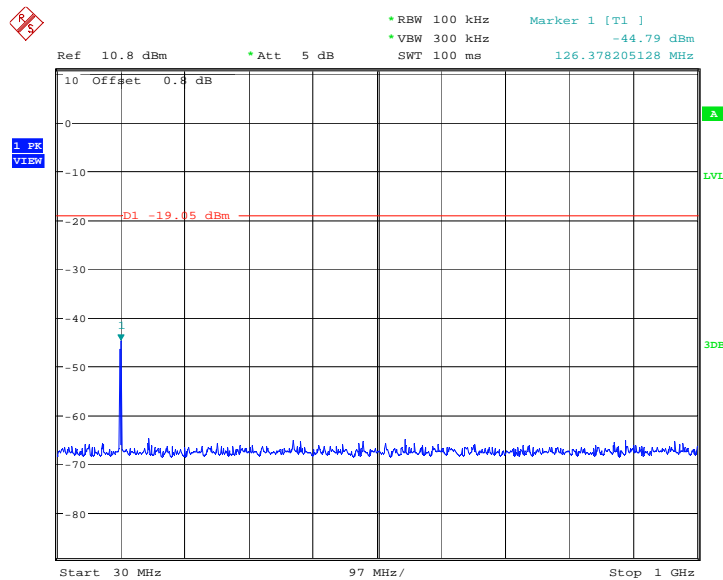


Date: 27.MAY.2014 09:23:13

Fig.9. Conducted spurious emission: GFSK, 2440 MHz, 30MHz - 1GHz

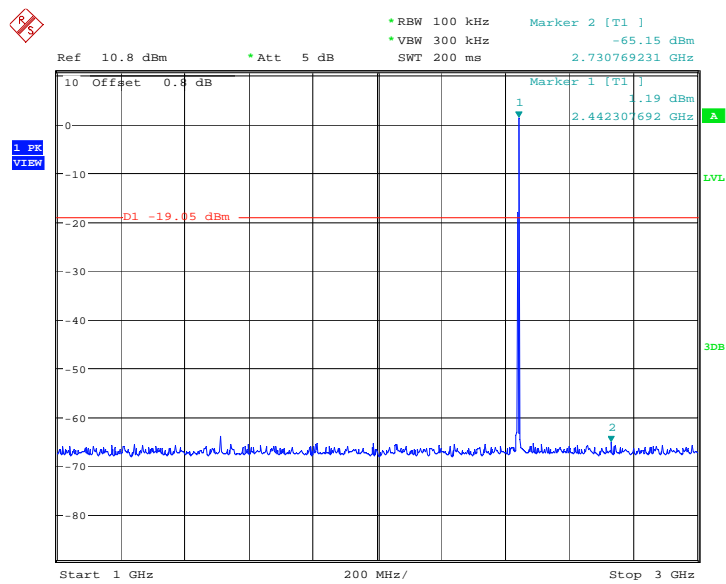


Date: 27.MAY.2014 09:23:44

Fig.10. Conducted spurious emission: GFSK, 2440 MHz, 1GHz – 3GHz

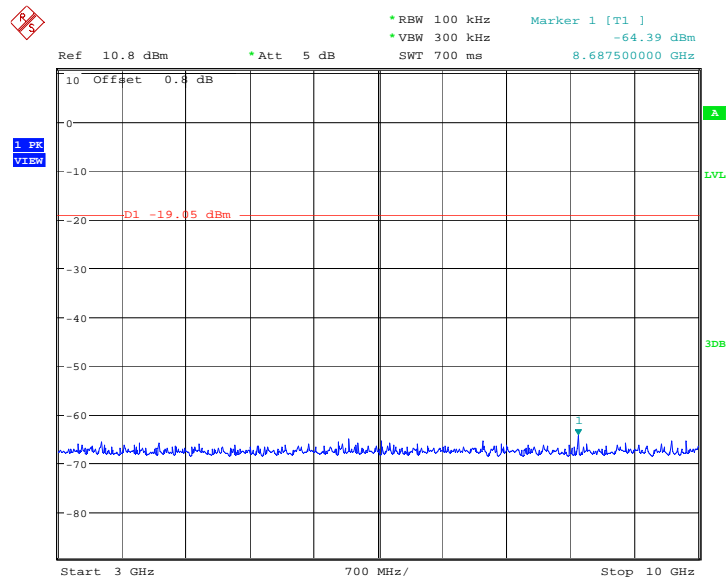


Date: 27.MAY.2014 09:24:01

Fig.11. Conducted spurious emission: GFSK, 2440 MHz, 3GHz – 10GHz

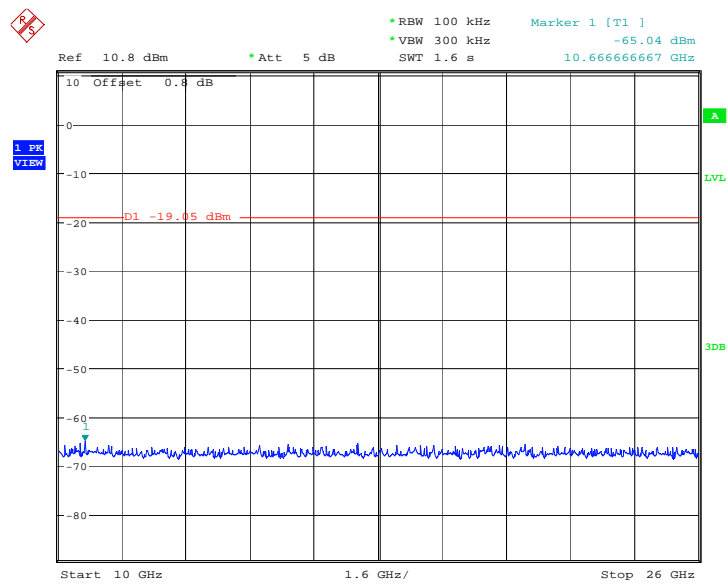


Date: 27.MAY.2014 09:24:18

Fig.12. Conducted spurious emission: GFSK, 2440 MHz, 10GHz – 26GHz

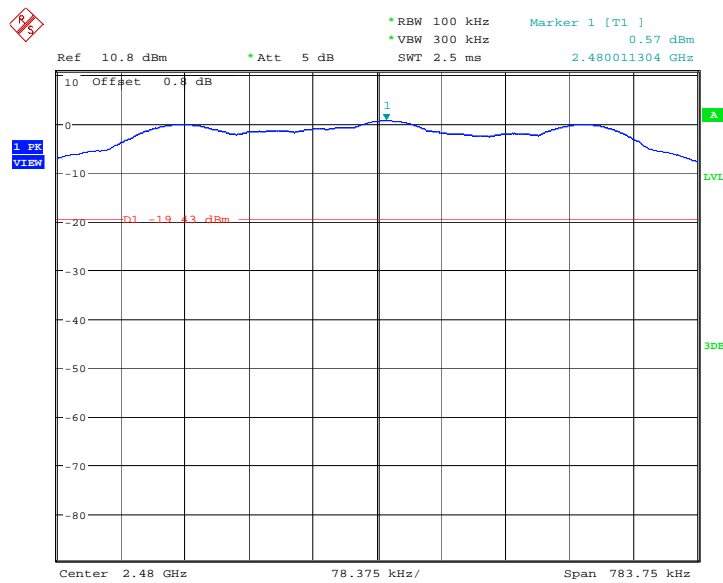


Date: 27.MAY.2014 09:26:05

Fig.13. Cond ucted spurious emission: GFSK, 2480 MHz

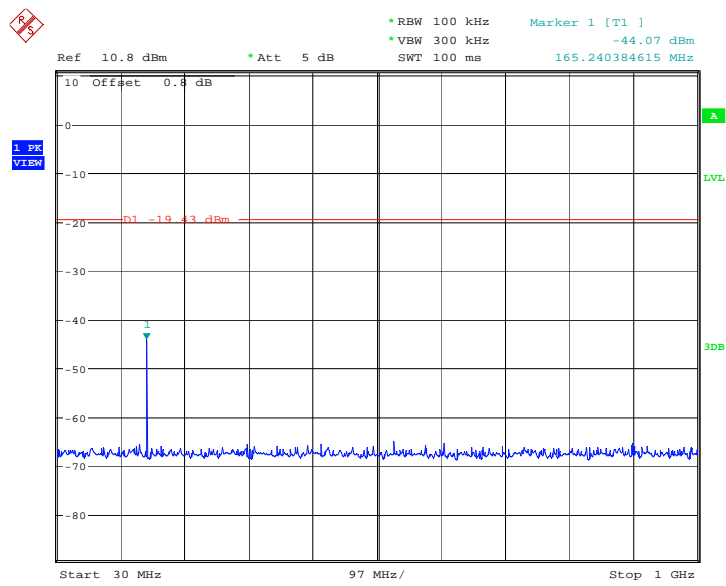


Date: 27.MAY.2014 09:26:22

Fig.14. Conducted spurious emission: GFSK, 2480 MHz, 30MHz - 1GHz

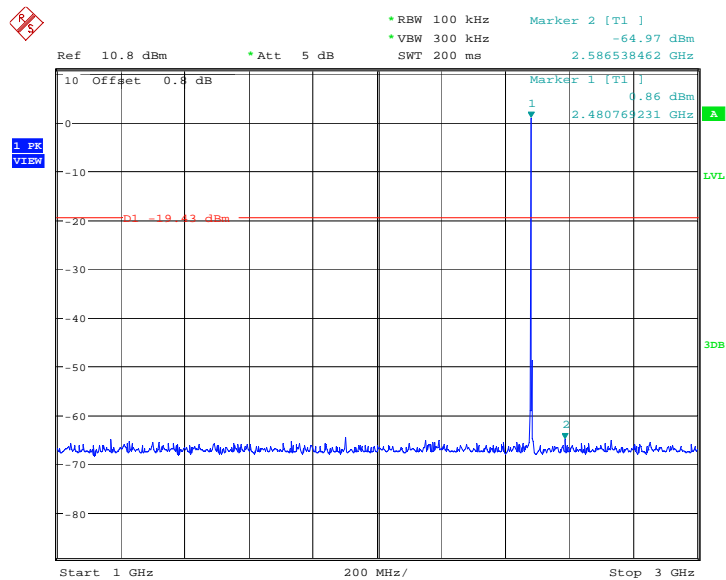


Date: 27.MAY.2014 09:26:53

Fig.15. Conducted spurious emission: GFSK, 2480 MHz, 1GHz - 3GHz

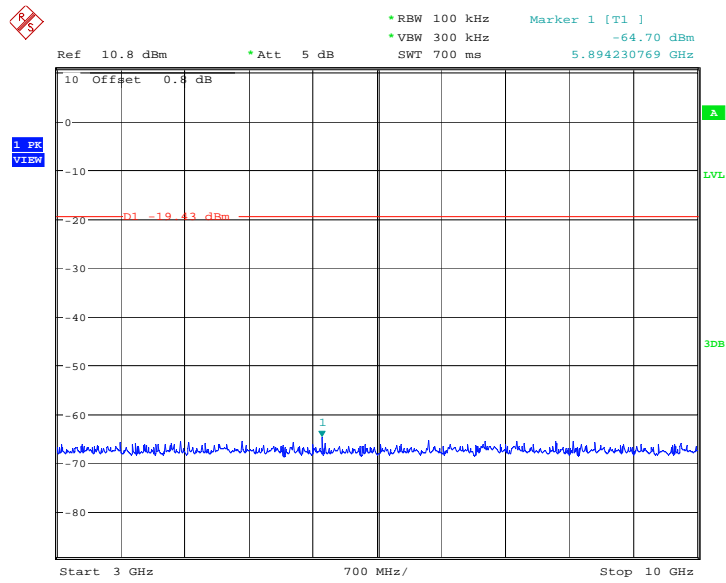

Date: 27.MAY.2014 09:27:10

Fig.16. Conducted spurious emission: GFSK, 2480 MHz, 3GHz - 10GHz

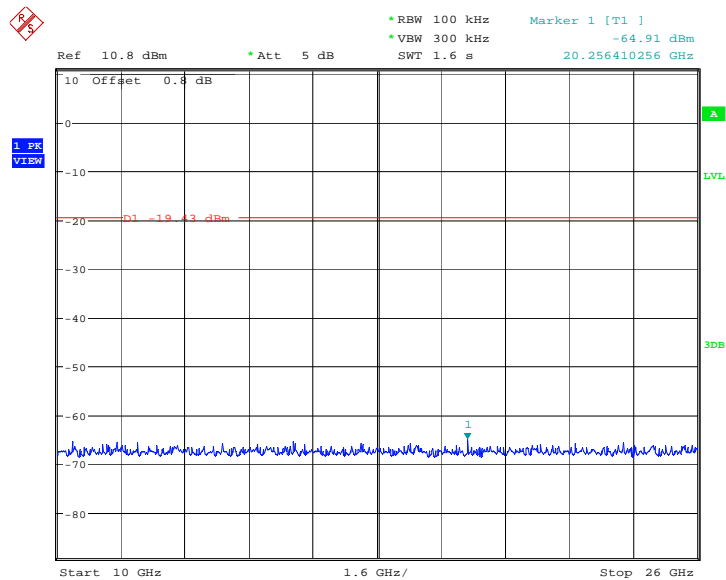

Date: 27.MAY.2014 09:27:27

Fig.17. Conducted spurious emission: GFSK, 2480 MHz, 10GHz - 26GHz

### A.5. Radiated Emission

#### Measurement Limit:

Standard Limit	
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88 100		40
88-216 150		43.5
216-960 200		46
Above 960	500	54

#### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW Sweep	Time(s)
0.009-1000 100KHz/300	KHz	5
1000-4000 1MHz/1MHz		15
4000-18000 1MHz/1MHz		40
18000-26500 1MHz/1MHz		20

#### Measurement Results:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

#### For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	Fig.18	P
	3 GHz ~ 18 GHz	Fig.19	P
2440 MHz	9 KHz ~ 30 MHz	Fig.20	P
	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P



2480 MHz	1 GHz ~ 3 GHz	Fig.24	P
	3 GHz ~ 18 GHz	Fig.25	P
Power 2.38GHz~2.	4GHz---L	Fig.26	P
Power 2.45GHz~2.	5GHz---H	Fig.27	P
For all channels	18 GHz ~ 26.5 GHz	Fig.28	P

**GFSK 2402MHz--Average**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2390.000	32.9	-11.1	44.000	V
17982.000	41.1	27.9	13.200	V
17995.500	40.5	27.9	12.600	V
17989.500	40.4	27.9	12.500	V
17806.500	40.4	27.1	13.300	V
17800.500	40.3	27.1	13.200	H

**GFSK 2440MHz--Average**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
17992.500	40.8	27.9	12.9	V
17982.000	40.6	27.9	12.7	V
17776.500	40.5	27.1	13.4	V
17995.500	40.5	27.9	12.6	H
17979.000	40.4	27.9	12.5	V
17811.000	40.1	27.1	13.0	V

**GFSK 2480MHz--Average**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2483.700	32.9	-11.2	44.1	V
17992.500	40.7	27.9	12.8	V
17979.000	40.6	27.9	12.7	H
17989.500	40.6	27.9	12.7	V
17995.500	40.5	27.9	12.6	V
17982.000	40.5	27.9	12.6	V

**Conclusion: PASS**

**Test graphs as below:**

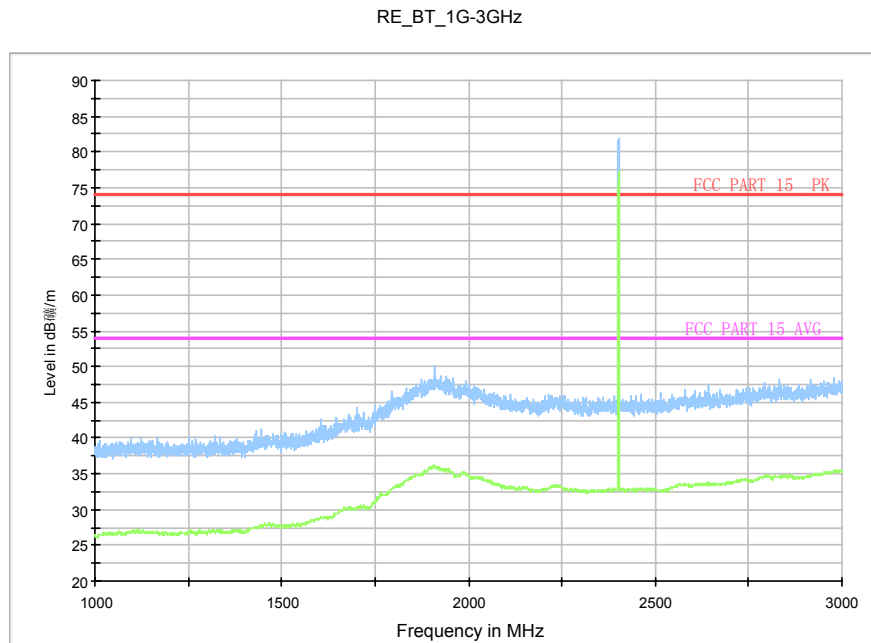


Fig.18. Radiated emission: GFSK, 2402MHz, 1 GHz - 3GHz

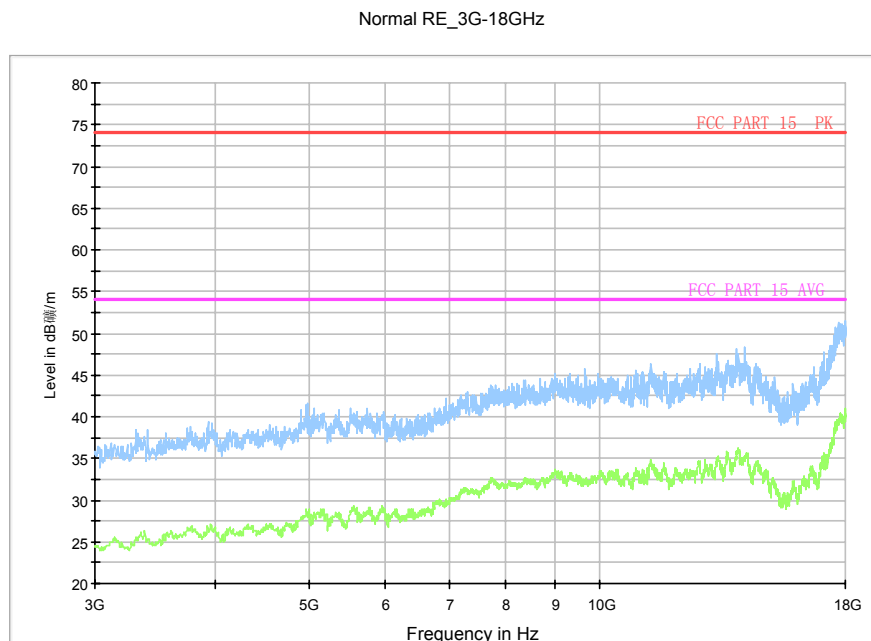


Fig.19. Radiated emission: GFSK, 2402MHz, 3 GHz - 18 GHz

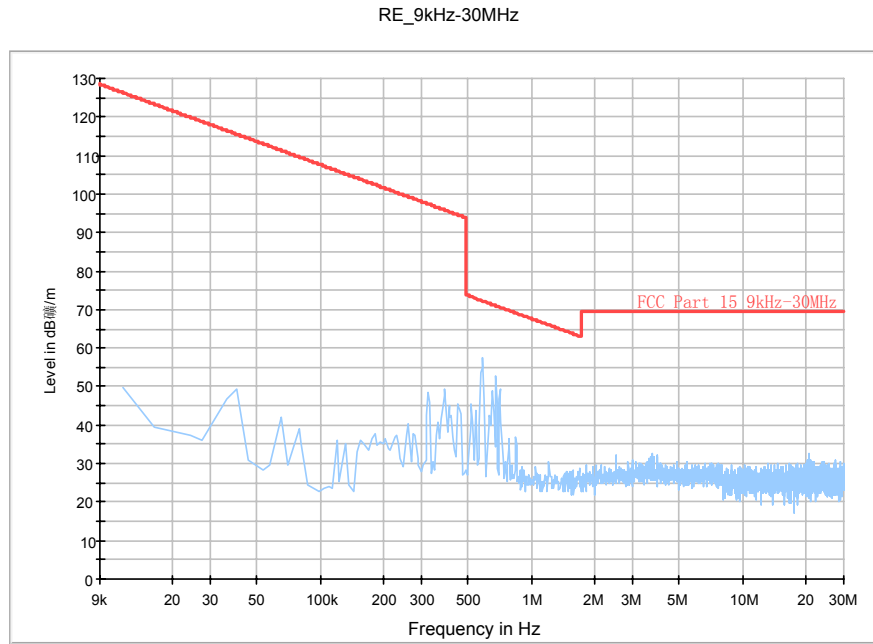


Fig.20. Radiated emission: GFSK, 2440MHz, 9 KHz - 30 MHz

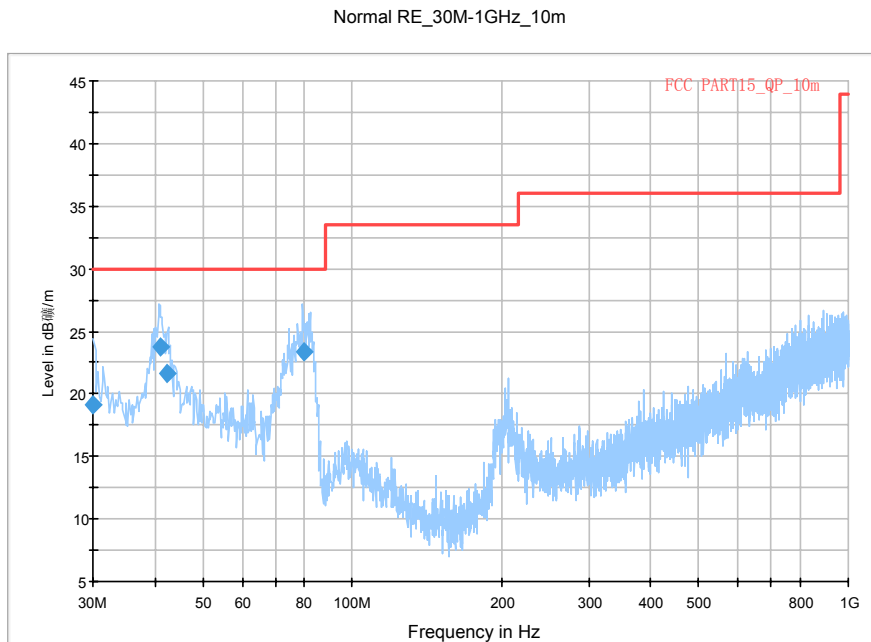


Fig.21. Radiated emission: GFSK, 2440MHz, 30 MHz - 1 GHz

RE\_BT\_1G-3GHz

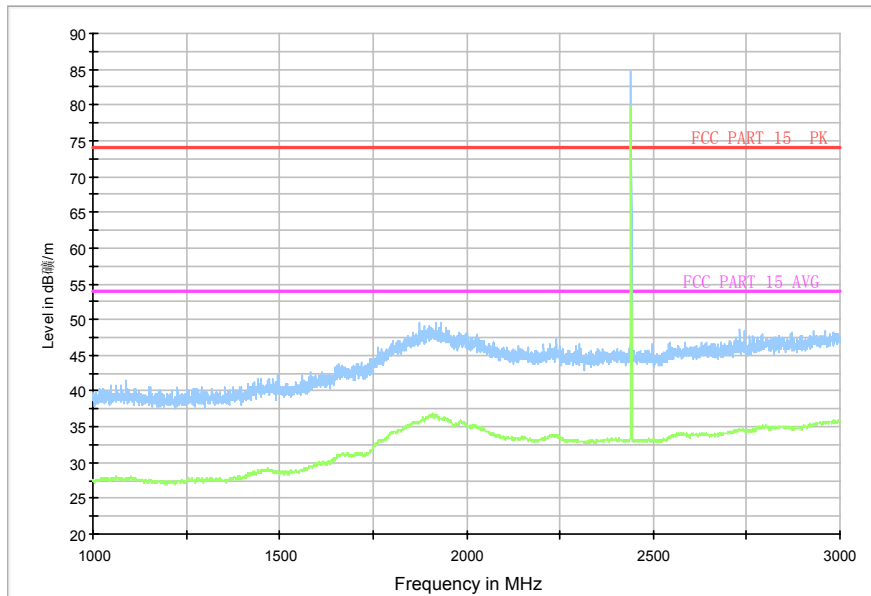


Fig.22. Radiated emission: GFSK, 2440MHz, 1 GHz - 3 GHz

Normal RE\_3G-18GHz

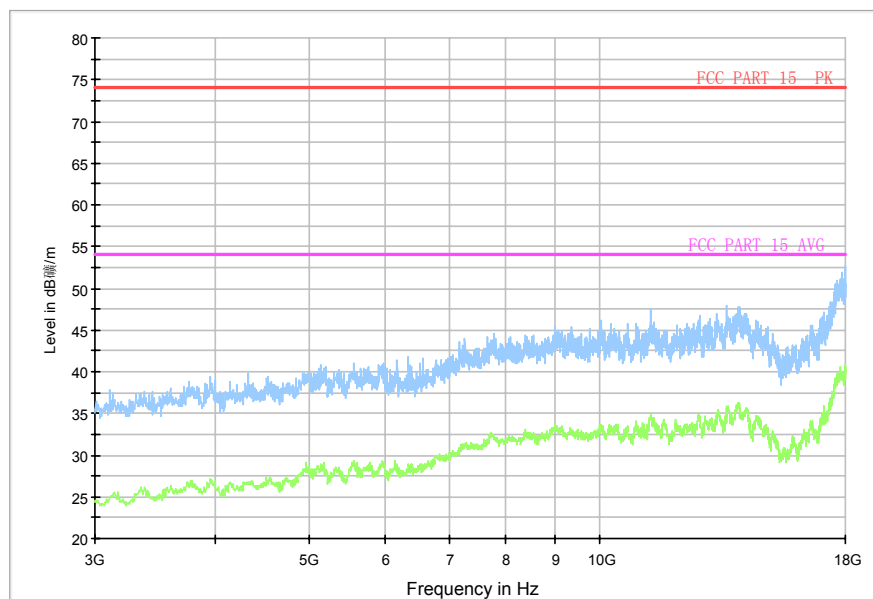


Fig.23. Radiated emission: GFSK, 2440MHz, 3 GHz - 18 GHz

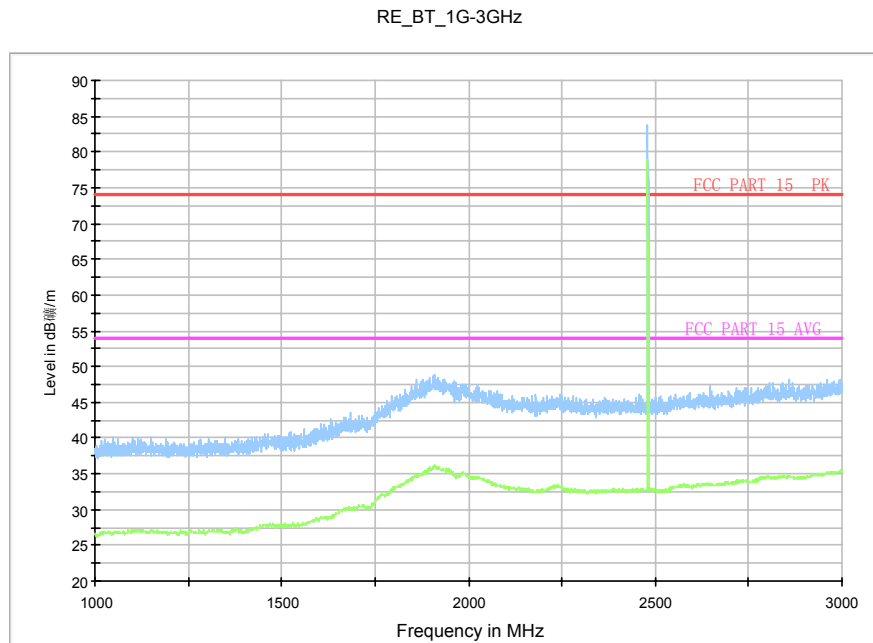


Fig.24. Radiated emission: GFSK, 2480MHz, 1 GHz - 3 GHz

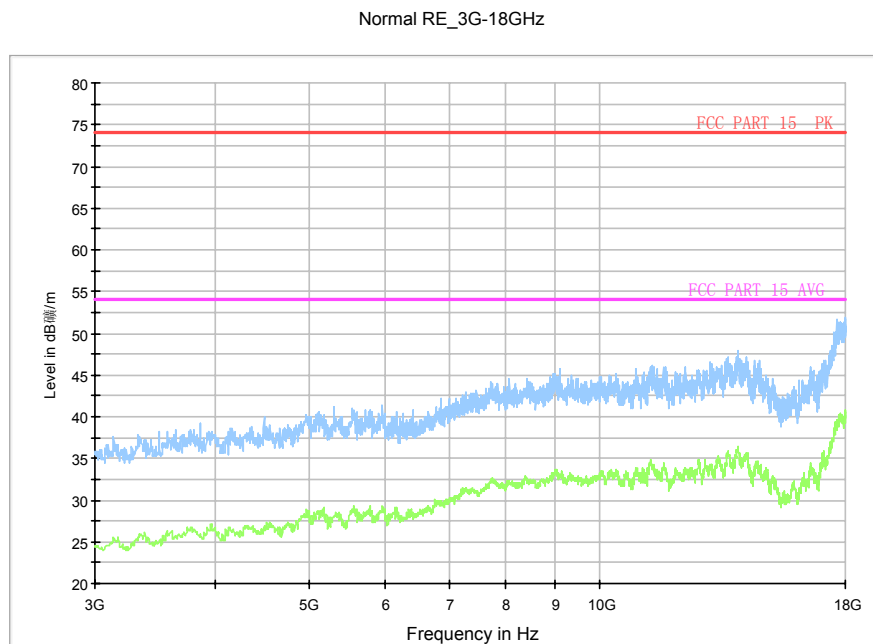


Fig.25. Radiated emission: GFSK, 2480MHz, 3 GHz - 18 GHz

RE-BT-Power\_2.38G-2.43GHz

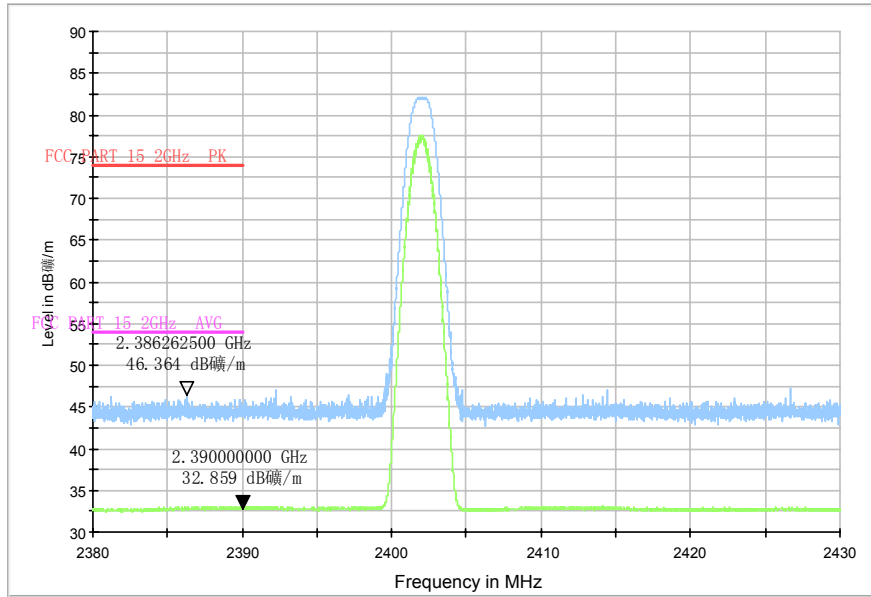


Fig.26. Radiated emission (Power): GFSK low channel

RE-BT-Power\_2.45G-2.5GHz

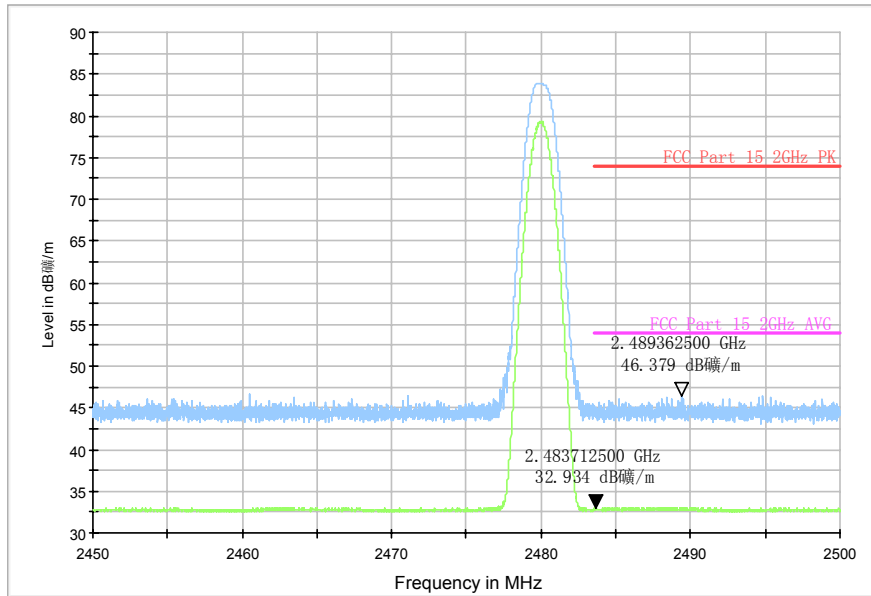


Fig.27. Radiated emission (Power): GFSK high channel

Normal RE\_18G-26.5GHz

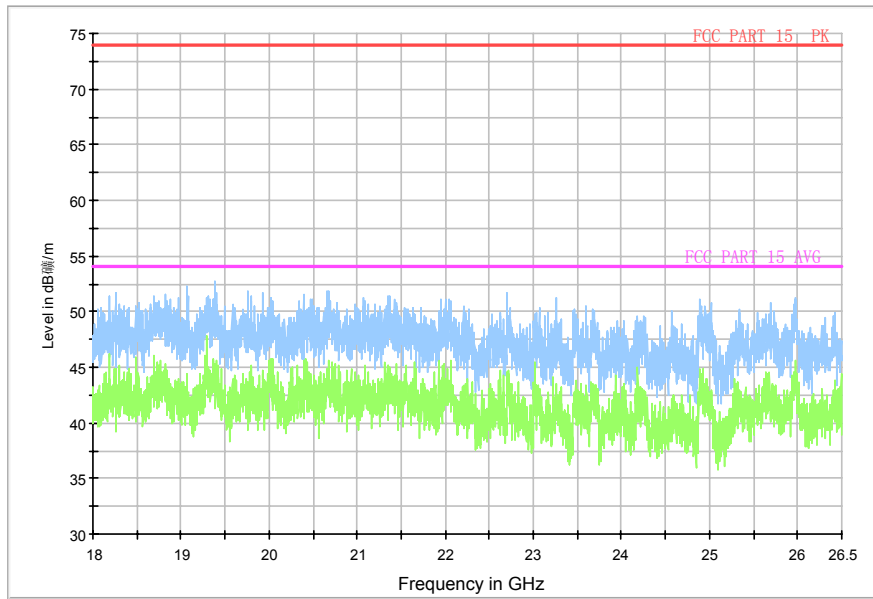


Fig.28. Radiated emission: GFSK, 18 GHz - 26 GHz

### A.6. 6dB Bandwidth

#### Measurement Limit:

Standard Limit	
FCC 47 CFR Part 15.247(a)(2)	>= 500KHz

The measurement is made according to ANSI C63.10

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  3RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Condition

Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	100kHz	300kHz 2MHz		2.5ms

#### Measurement Results:


##### For GFSK

Frequency	6dB Bandwidth (kHz)		Conclusion
2402MHz Fig.29		673.08	P
2440MHz Fig.30		666.67	P
2480MHz Fig.31		669.87	P

**Conclusion: PASS**


**Test graphs as below:**



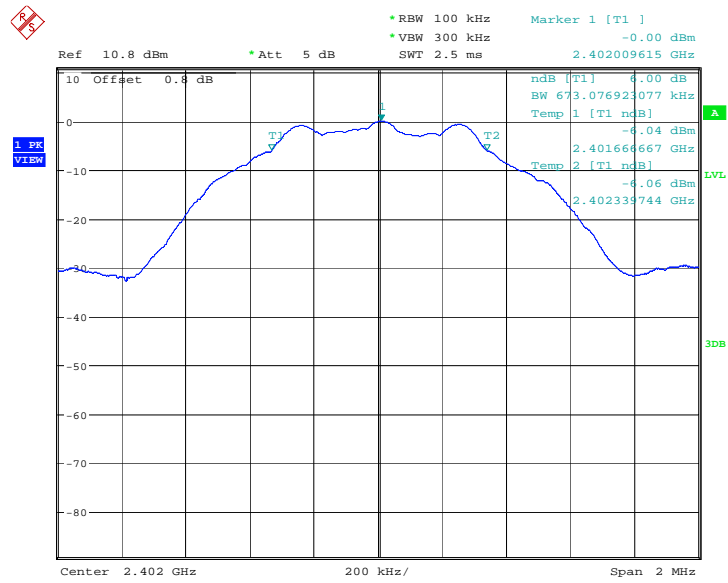


Date: 27.MAY.2014 09:16:42

Fig.29. 6dB Bandwidth: GFSK, 2402 MHz

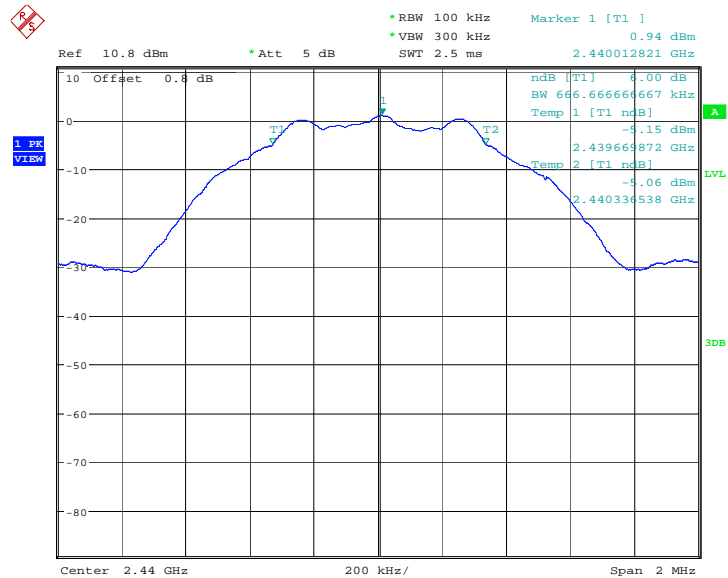

Date: 27.MAY.2014 09:22:11

Fig.30. 6dB Bandwidth: GFSK, 2440 MHz

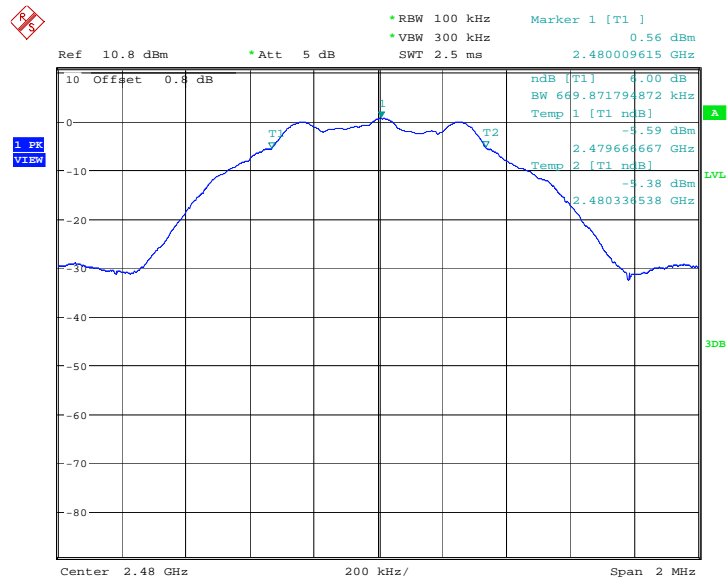

Date: 27.MAY.2014 09:25:20

Fig.31. 6dB Bandwidth: GFSK, 2480 MHz

### A.7. Maximum Power Spectral Density Level

#### Measurement Limit:

Standard Limit	
FCC 47 CFR Part 15.247(e)	<=8.0dBm


1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
9. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{kHz} = -15.2\text{ dB})$ .

#### Measurement Results:

##### For GFSK


Frequency	Maximum Power Spectral Density Level(dBm)	Conclusion
2402MHz Fig.32	-15.21	P
2440MHz Fig.33	-14.26	P
2480MHz Fig.34	-14.63	P

Test graphs as below:

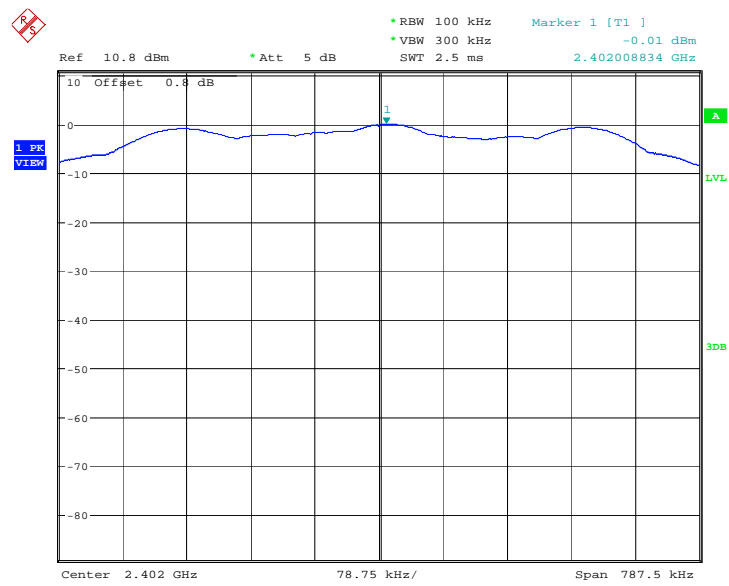


Date: 27.MAY.2014 09:17:09

Fig.32. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

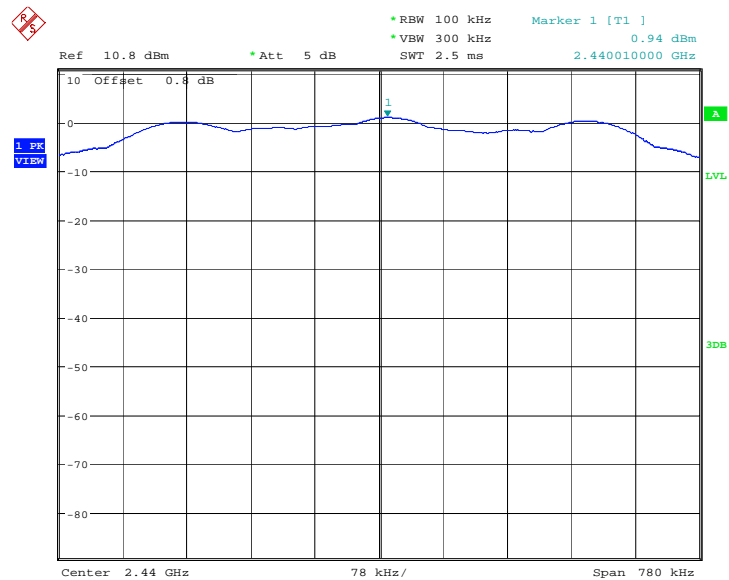

Date: 27.MAY.2014 09:22:38

Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

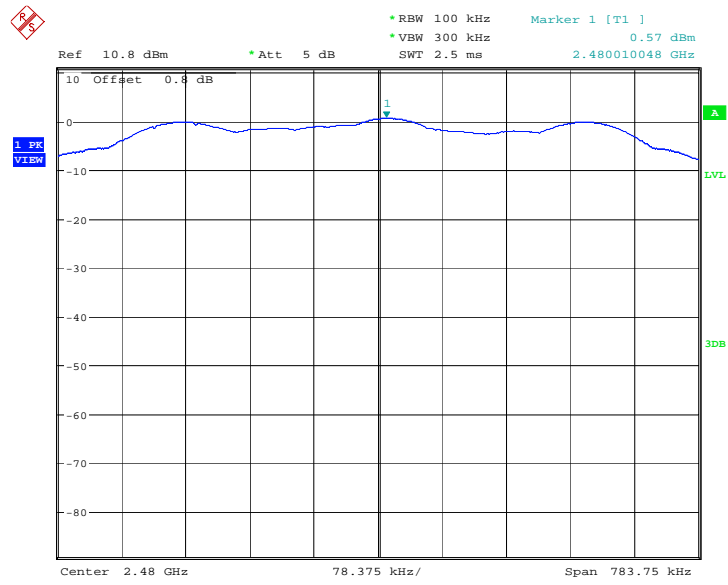

Date: 27.MAY.2014 09:25:47

Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

### A.8. AC Powerline Conducted Emission

#### Test Condition

Voltage (V)	Freque	ncy (Hz)
120	60	

#### Measurement Result and limit:

##### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

##### Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

Traffic:

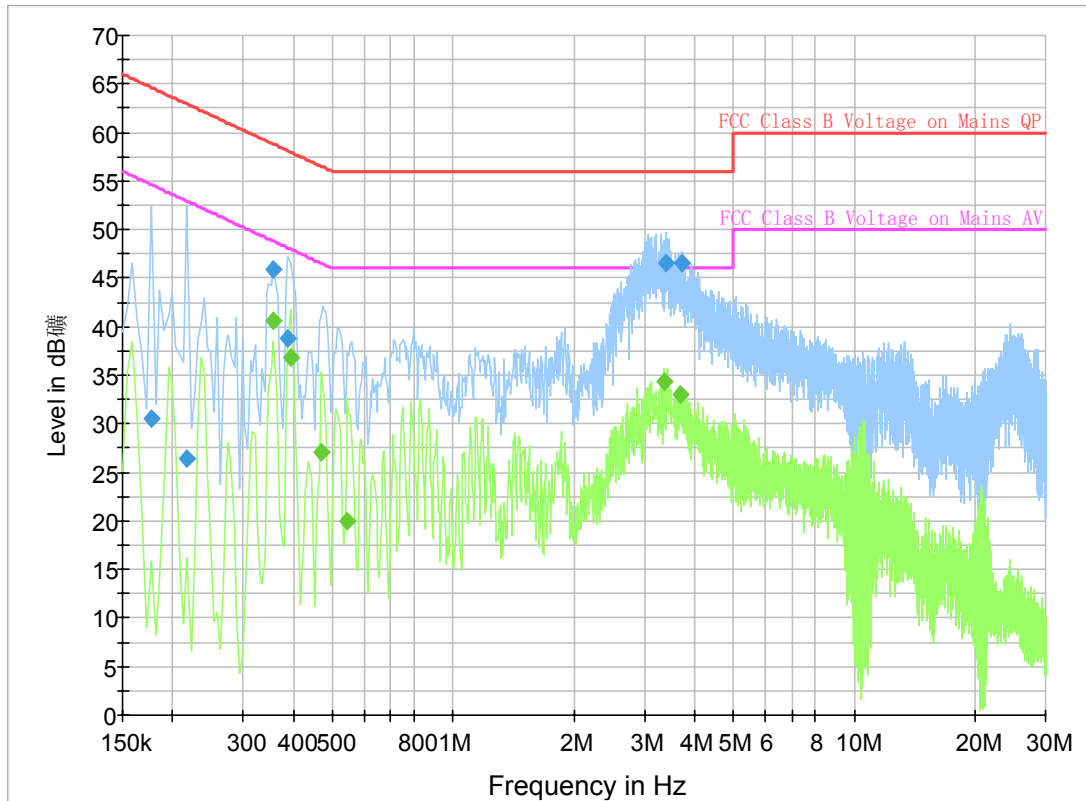


**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.177000	30.	6	GND L1	9.8	34.1	64.6
0.217500	26.	3	GND L1	9.8	36.6	62.9
0.357000	45.	9	GND L1	9.8	12.9	58.8
0.388500	38.	7	GND L1	9.8	19.4	58.1
3.390000	46.	6	GND L1	9.7	9.4	56.0
3.718500	46.	5	GND L1	9.7	9.5	56.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.357000	40.	7	GND L1	9.8	8.1	48.8
0.393000	36.	9	GND L1	9.8	11.1	48.0
0.469500	27.	1	GND L1	9.8	19.4	46.5
0.546000	20.	1	GND L1	9.8	25.9	46.0
3.349500	34.	4	GND L1	9.7	11.6	46.0
3.678000	33.	0	GND L1	9.7	13.0	46.0

Idle:

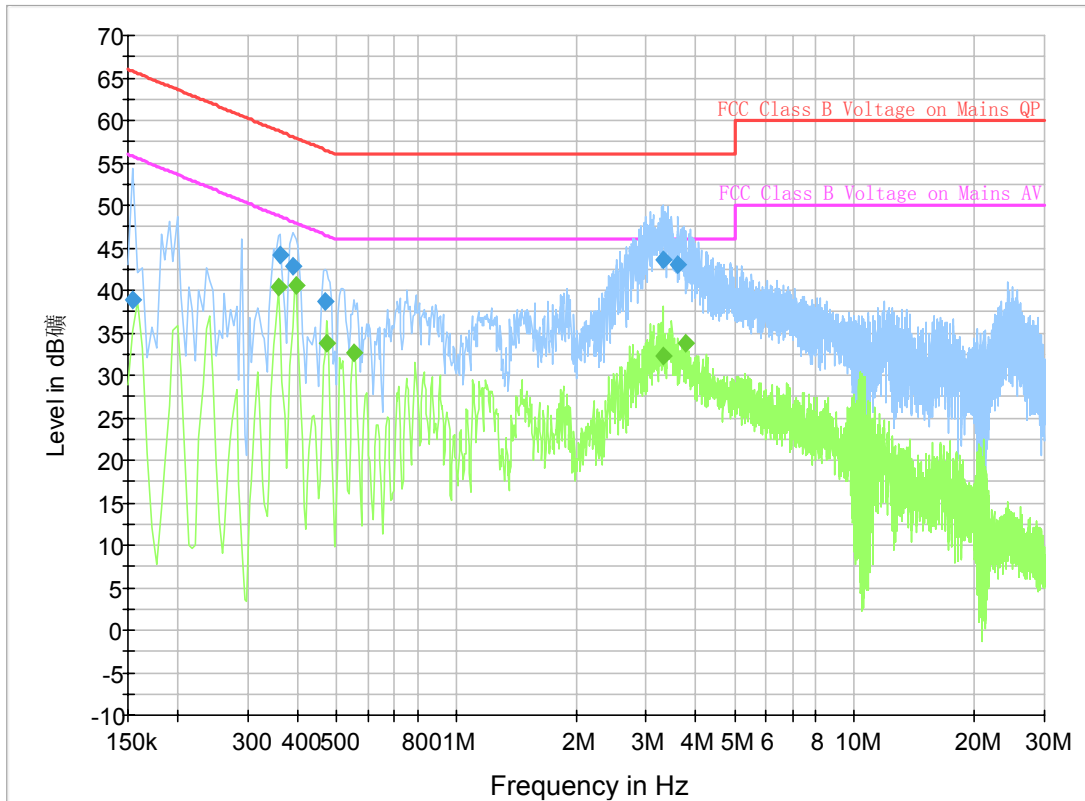

### Final Result 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.154500	38.	9	GND L1	9.8	26.8	65.8
0.361500	44.	1	GND L1	9.8	14.6	58.7
0.388500	42.	9	GND L1	9.8	15.2	58.1
0.469500	38.	7	GND N	9.8	17.8	56.5
3.300000	43.	7	GND L1	9.7	12.3	56.0
3.610500	43.	0	GND L1	9.7	13.0	56.0

### Final Result 2

Frequency (MHz)	Average (dB $\mu$ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.357000	40.	3	GND L1	9.8	8.5	48.8
0.397500	40.	5	GND L1	9.8	7.4	47.9
0.474000	33.	8	GND L1	9.8	12.6	46.4
0.555000	32.	7	GND L1	9.8	13.3	46.0
3.300000	32.	3	GND L1	9.7	13.7	46.0
3.781500	33.	8	GND L1	9.7	12.2	46.0



## A.9 Receiver Radiation Emission

### Reference

FCC: CFR Part 15.109, 2.1053

### A.9.1 Method of Measurement

The measurement procedure in ANSI C63.10-2009 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without C MU200's signaling.

### A.9.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB $\mu$ V/m)	Measurement Distance (m)
30-88 30		10
88-216 33.5		10
216-960 36		10
960-1000 44		10
>1000 54		3

### A. 9.3 Measurement results

IF bandwidth: 120 kHz

#### Idle Mode: 30MHz-1GHz


Normal RE\_30M-1GHz\_10m

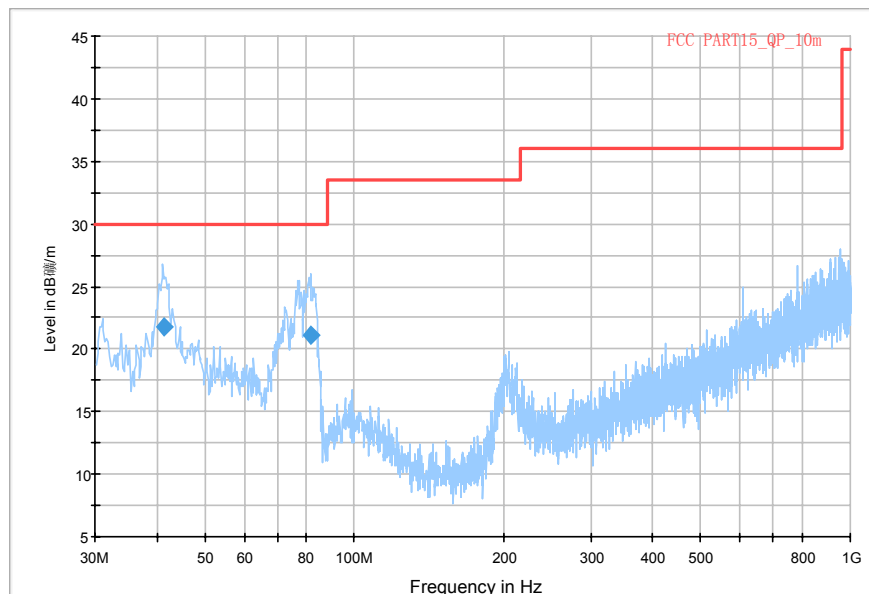

RBW / VBW 1 MHz

**Idle Mode: 1GHz-3GHz**


RE\_BT\_1G-3GHz

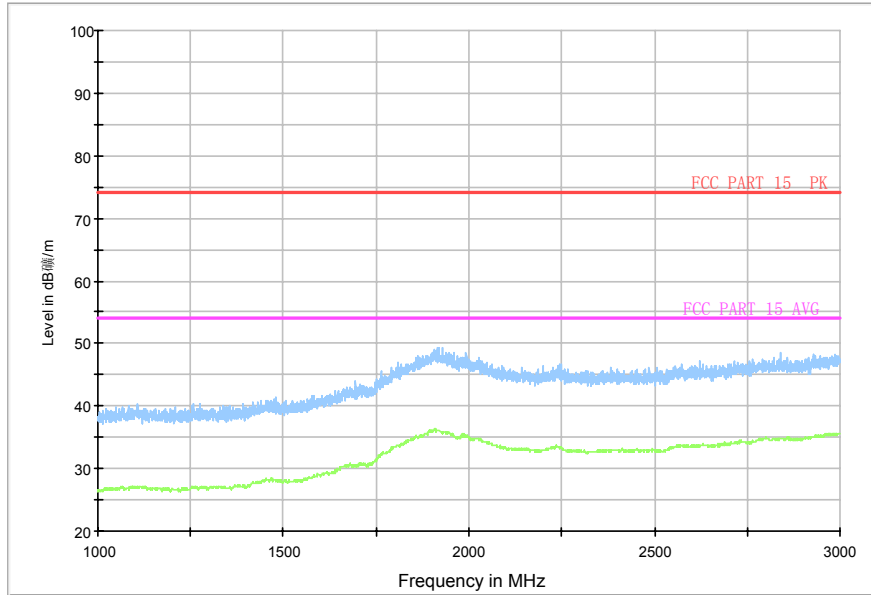

RBW / VBW 1 MHz

**Idle Mode: 3GHz-18GHz**

Normal RE\_3G-18GHz

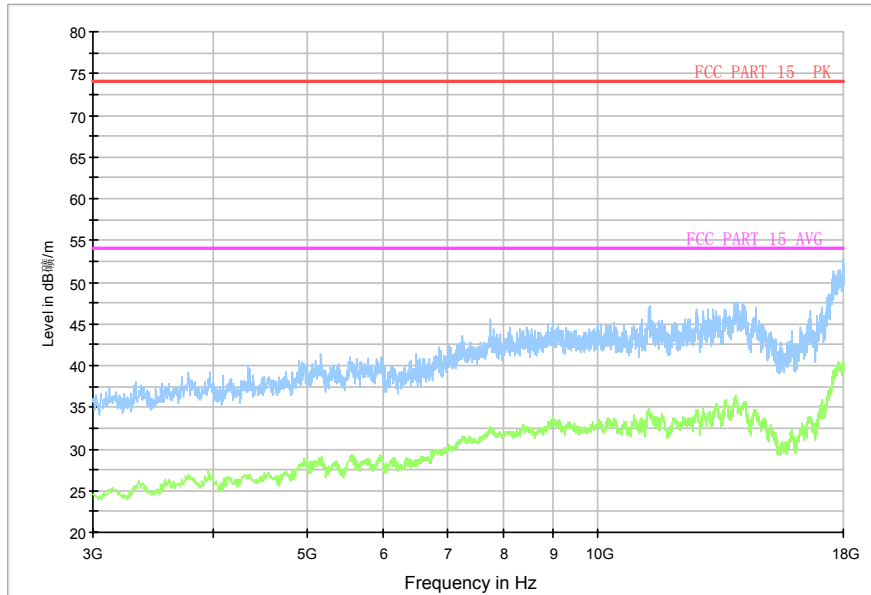

\*\*\* END OF REPORT BODY \*\*\*