



The Photos of SAR test

No. I14Z47396-SEM01

For

TCT Mobile Limited

HSUPA/HSDPA/UMTS dual band/GSM quad-band mobile phone

Model Name: 4018M

With

Hardware Version: PIO

Software Version: v8I1F

FCC ID: RAD515

Issued Date: 2014-08-01



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.


Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com



Picture 1: Constituents of the sample




Picture 2: Left Hand Touch Cheek Position

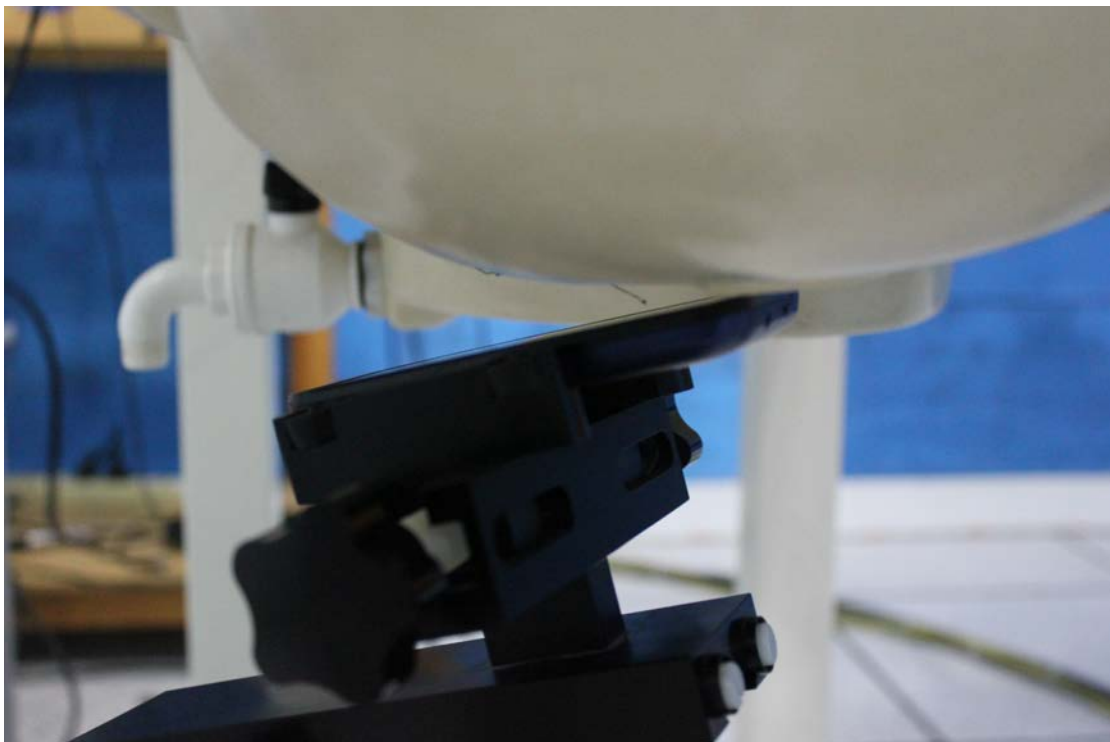

Picture 3: Left Hand Tilt 15° Position



Picture 4: Right Hand Touch Cheek Position

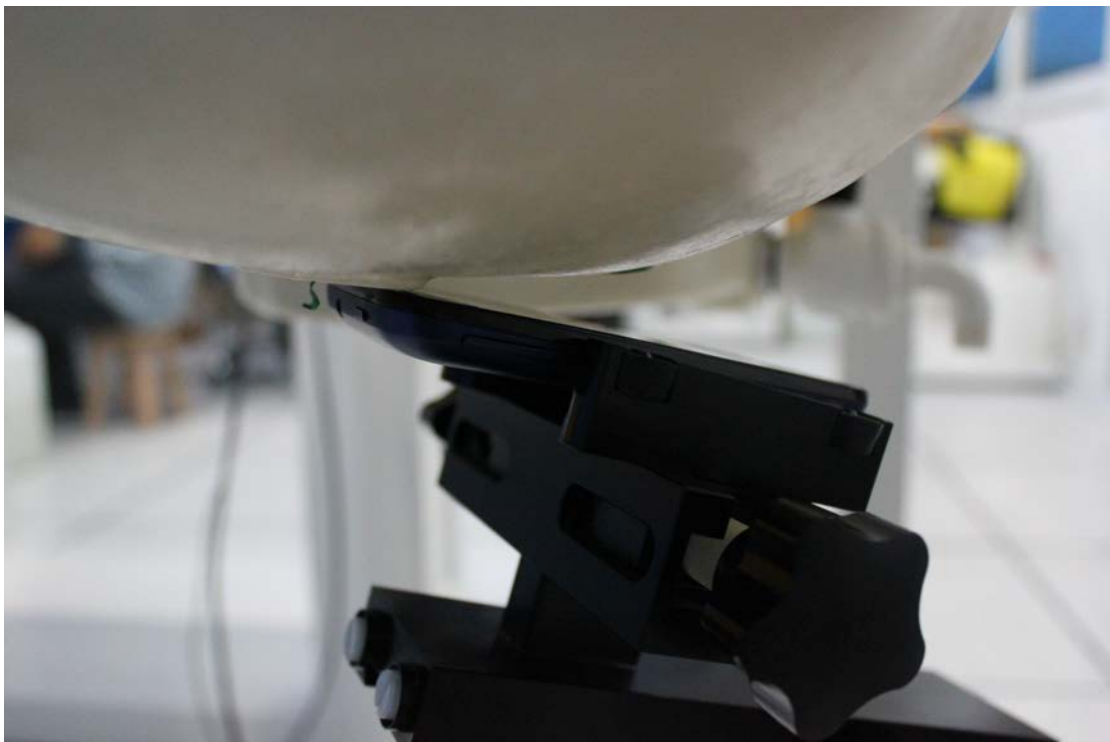

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:



Picture 6: Front



Picture 7: Rear

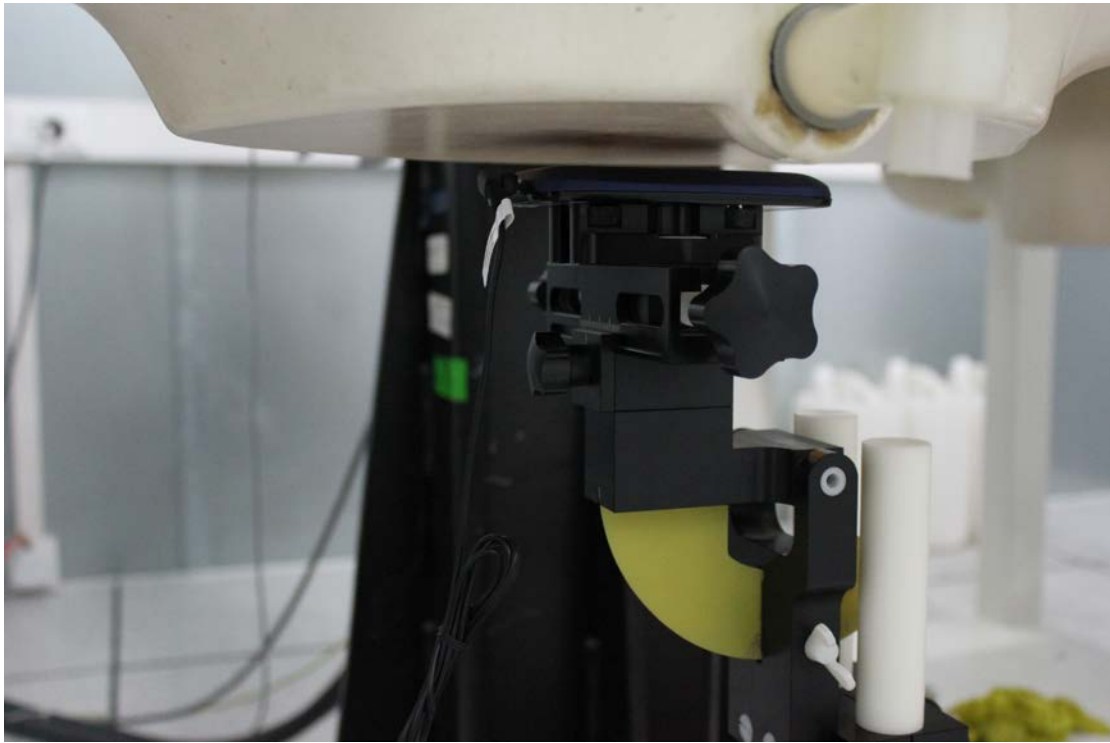

Picture 7-1: Rear with Headset



Picture 8: Left Edge




Picture 9: Right Edge



Picture 10: Top Edge



Picture 11: Bottom Edge

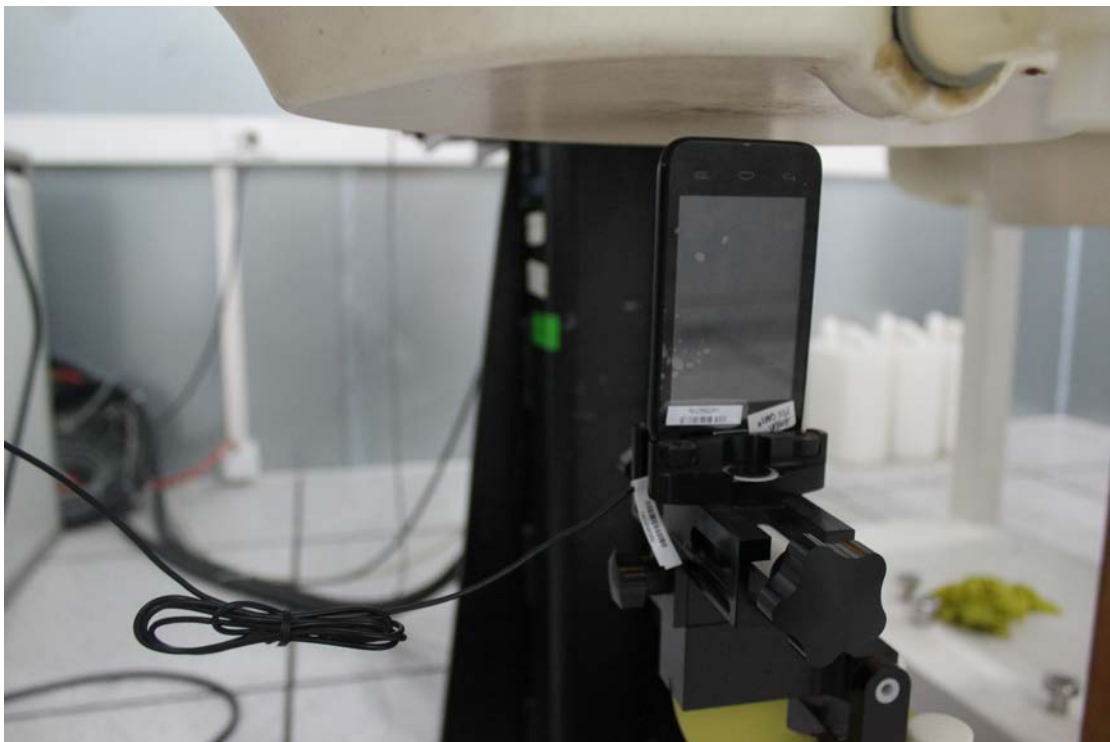

Picture 11-1: Bottom Edge with Headset