

Fig.A.6.1.59 Conducted Spurious Emission (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)

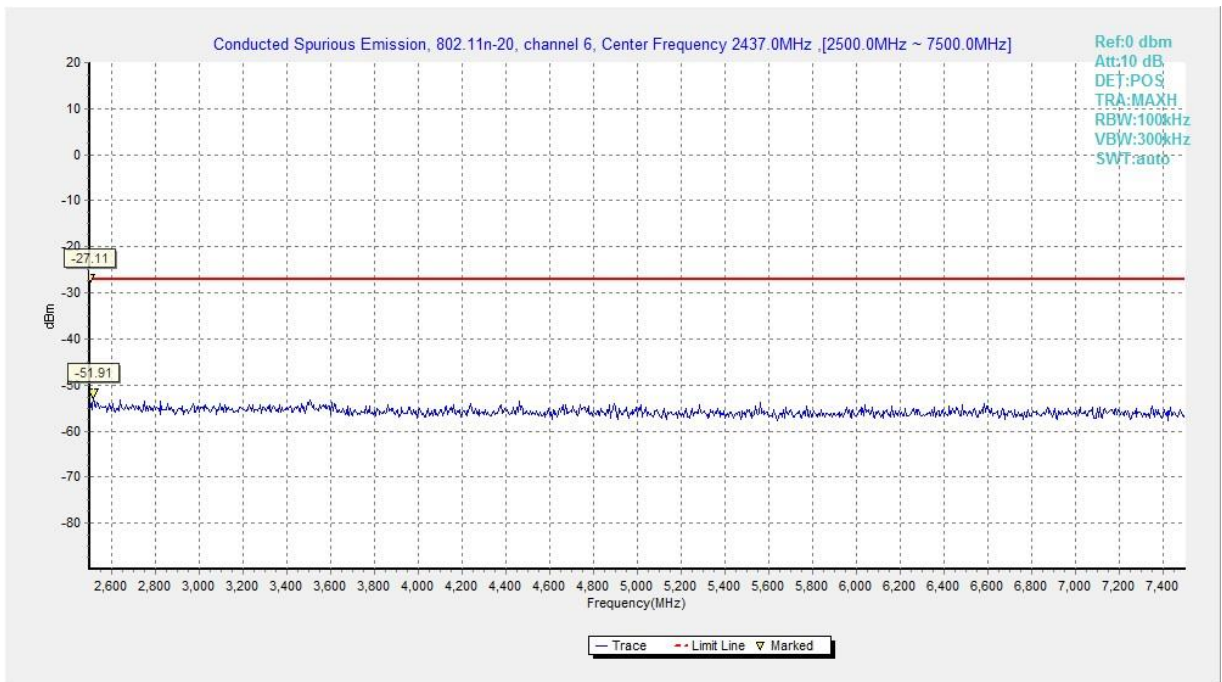


Fig.A.6.1.60 Conducted Spurious Emission (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)

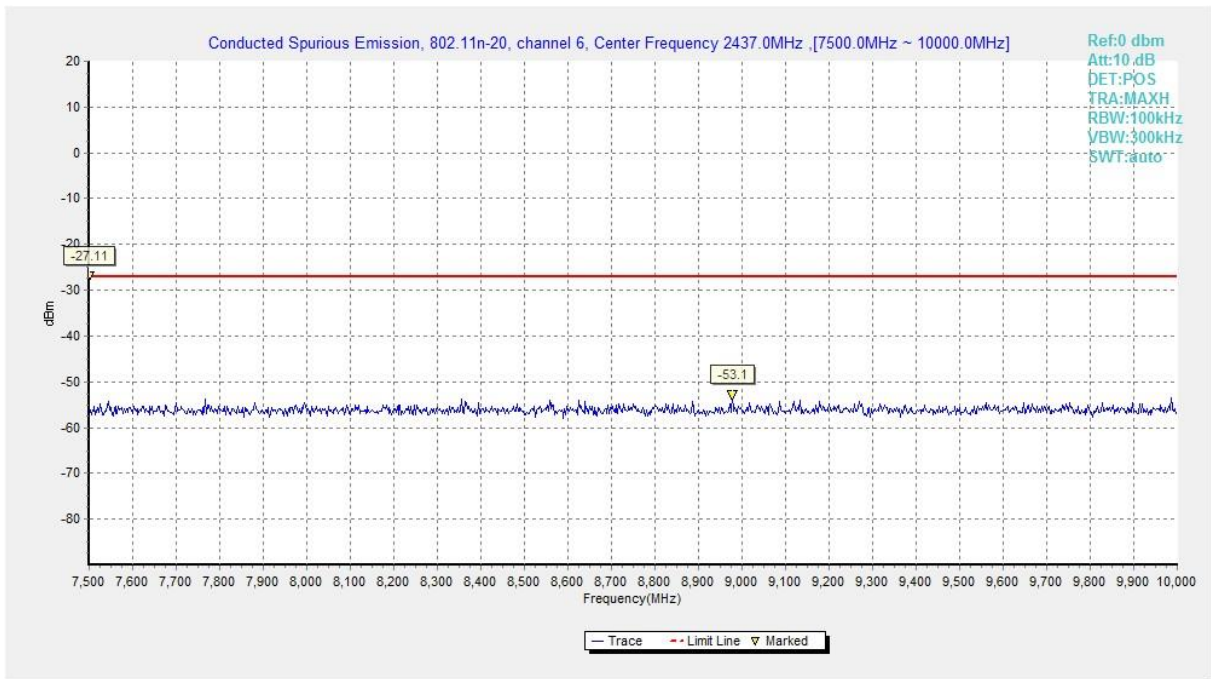


Fig.A.6.1.61 Conducted Spurious Emission (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)

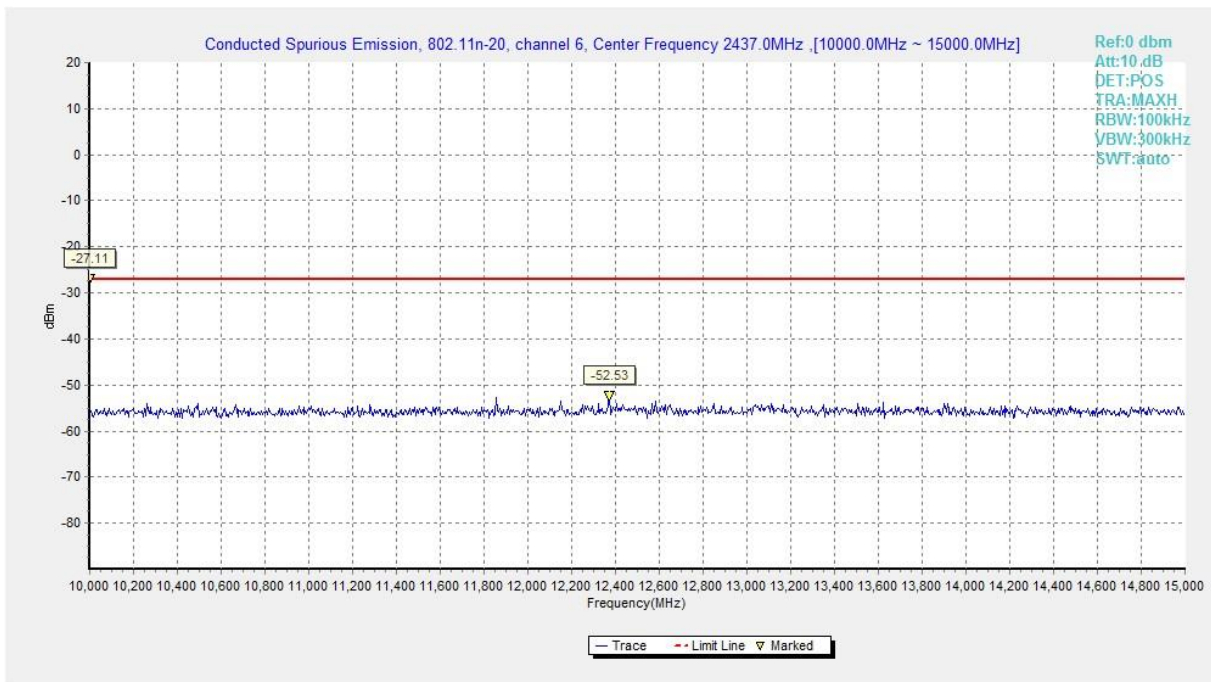


Fig.A.6.1.62 Conducted Spurious Emission (802.11n-HT20, Ch6, 10 GHz-15 GHz)

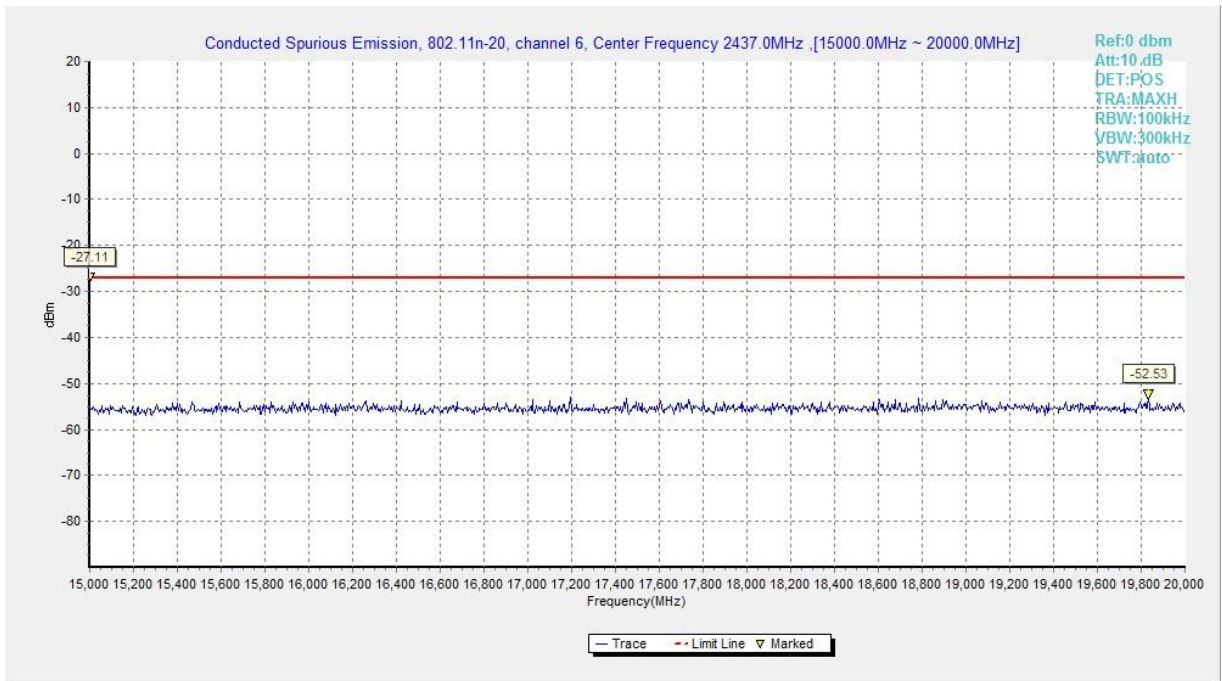


Fig.A.6.1.63 Conducted Spurious Emission (802.11n-HT20, Ch6, 15 GHz-20 GHz)

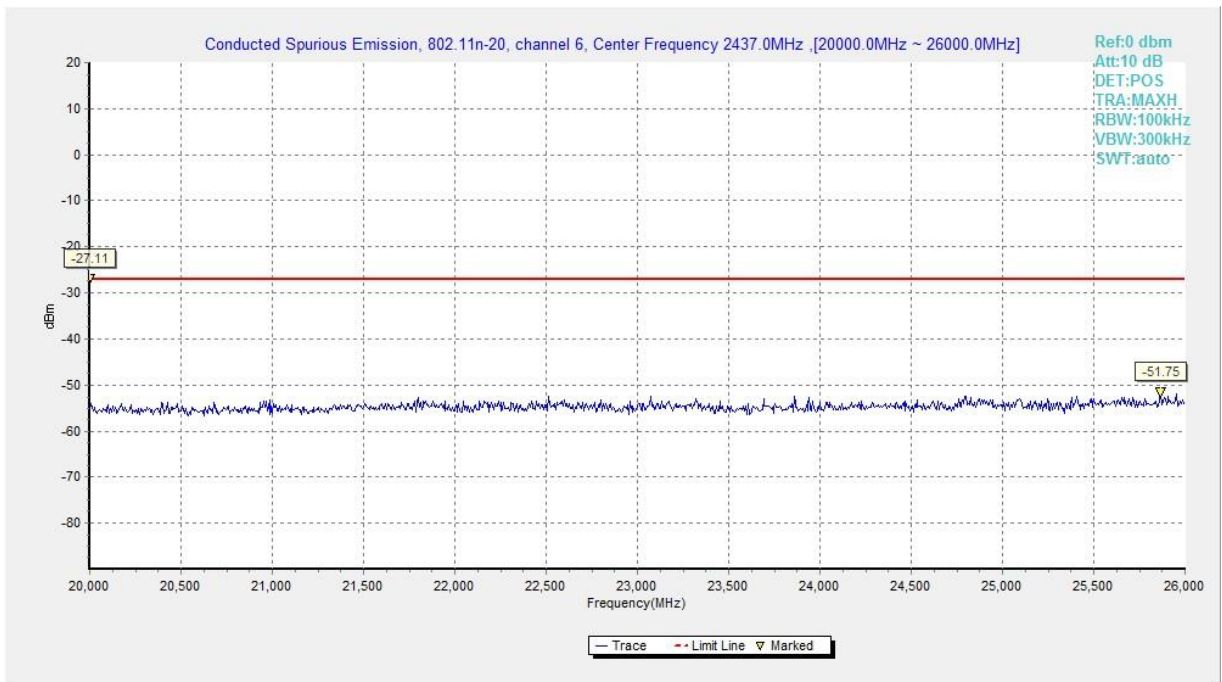


Fig.A.6.1.64 Conducted Spurious Emission (802.11n-HT20, Ch6, 20 GHz-26 GHz)

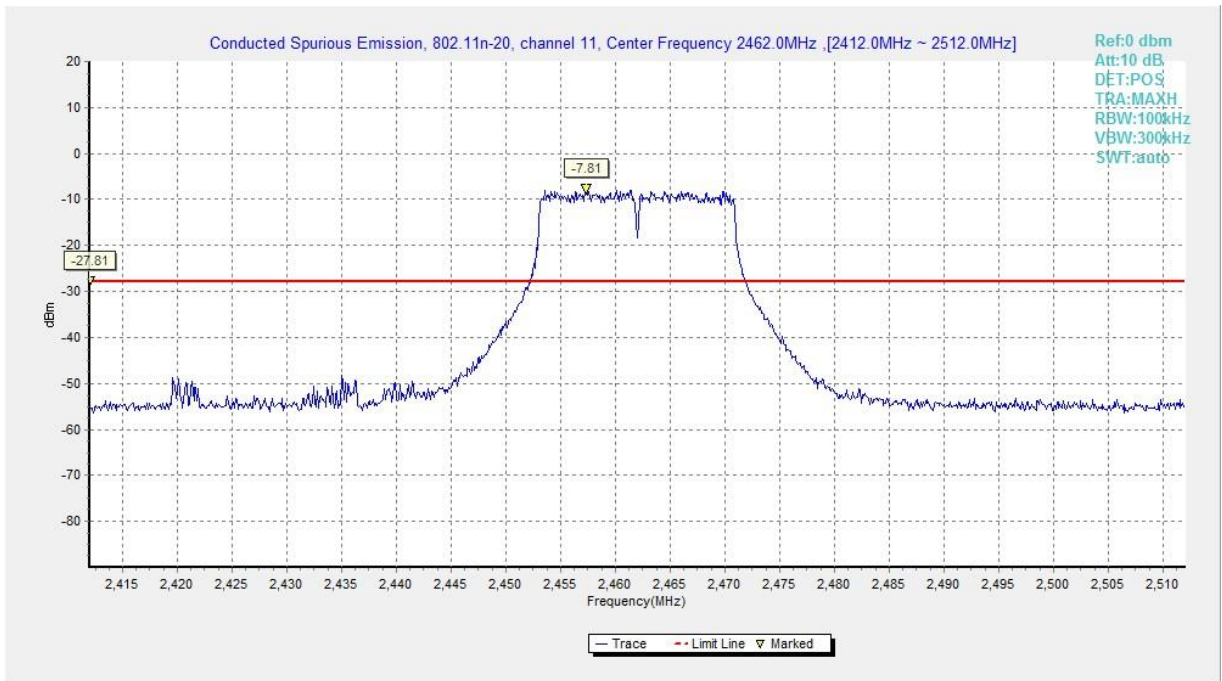


Fig.A.6.1.65 Conducted Spurious Emission (802.11n-HT20, Ch11, Center Frequency)

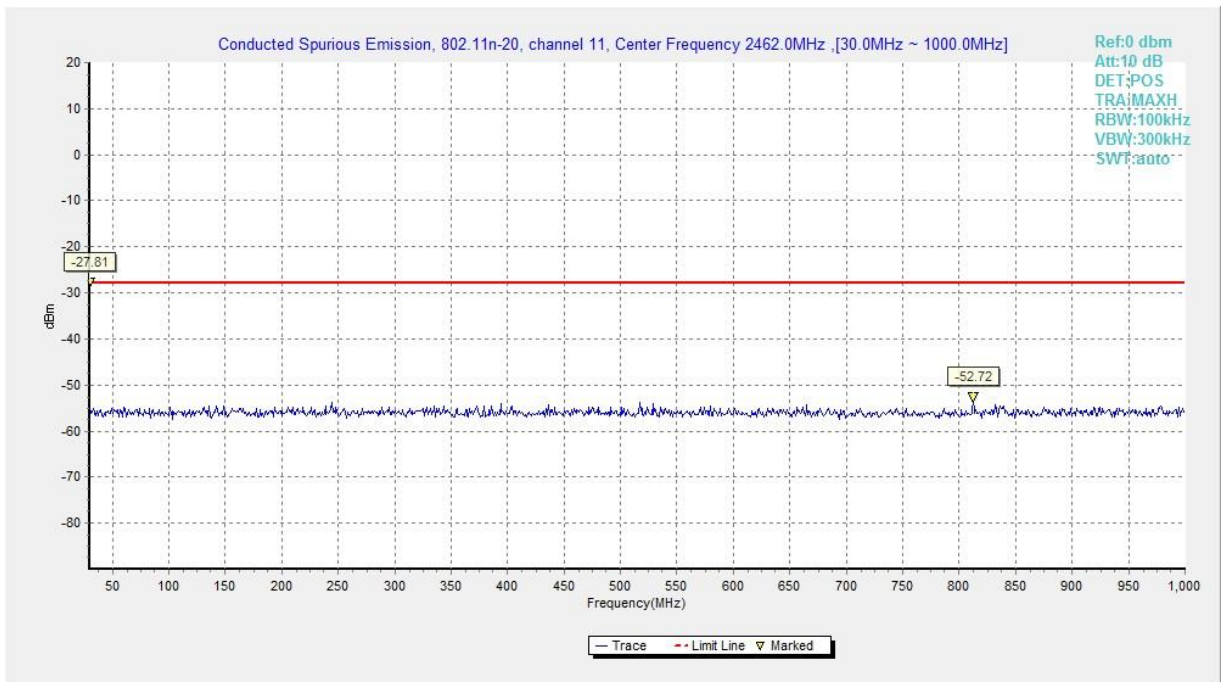


Fig.A.6.1.66 Conducted Spurious Emission (802.11n-HT20, Ch11, 30 MHz-1 GHz)

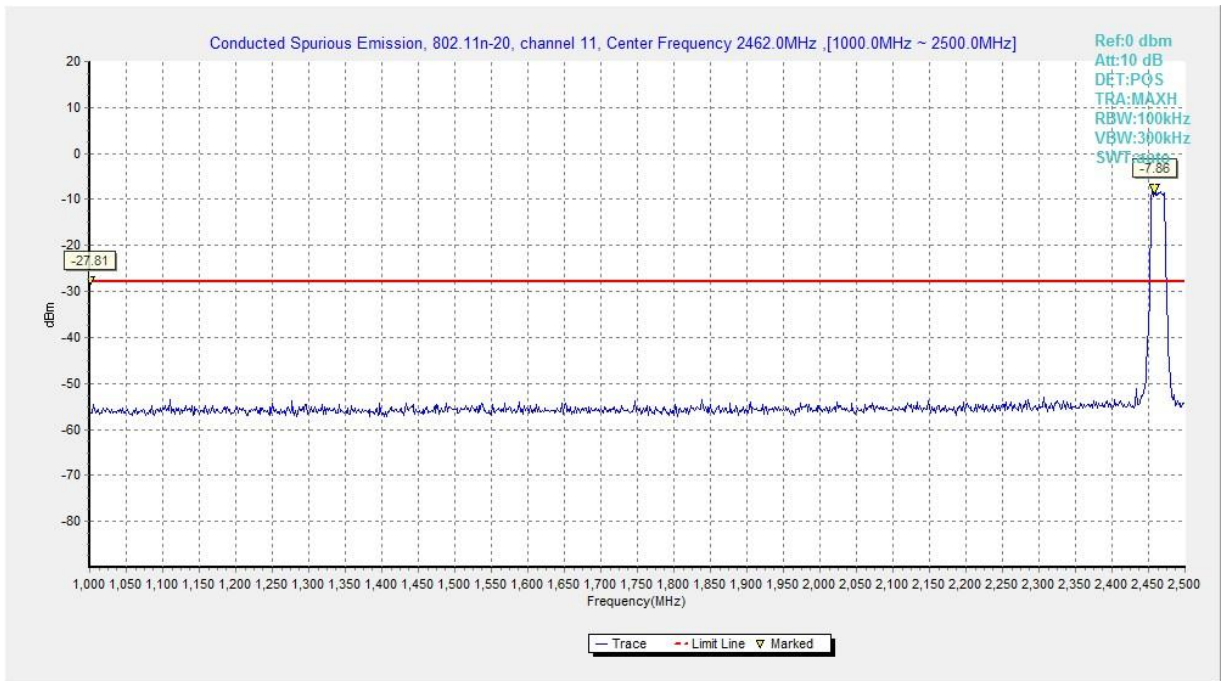


Fig.A.6.1.67 Conducted Spurious Emission (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

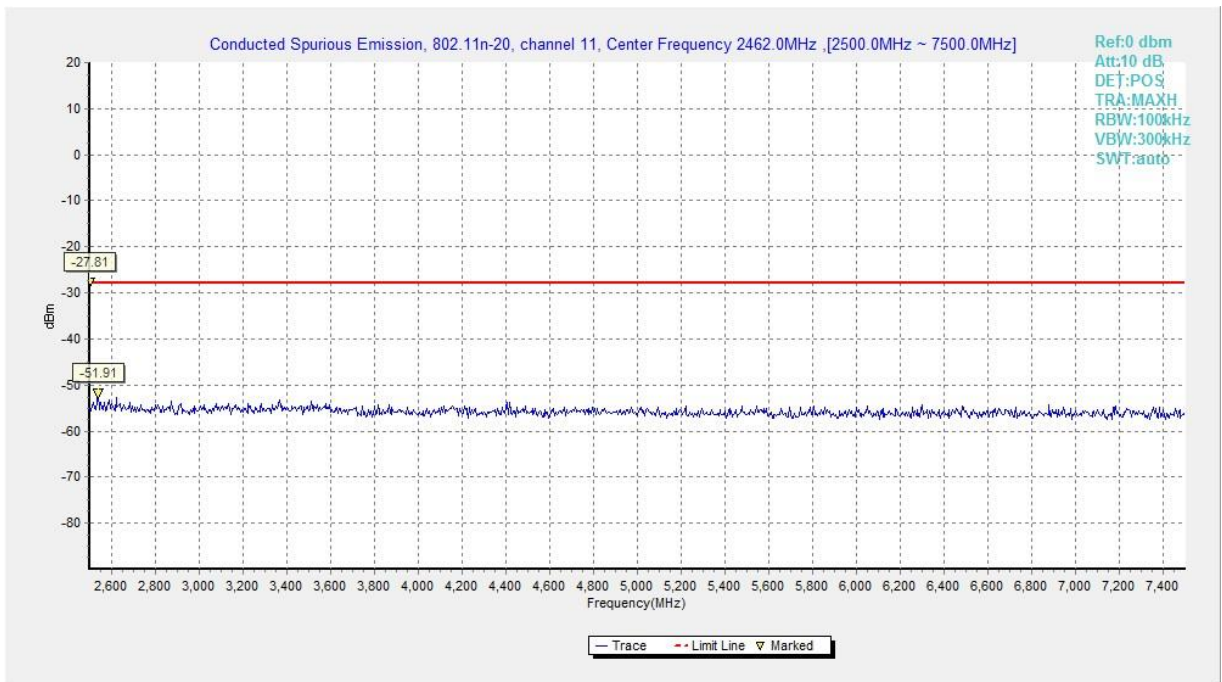


Fig.A.6.1.68 Conducted Spurious Emission (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)

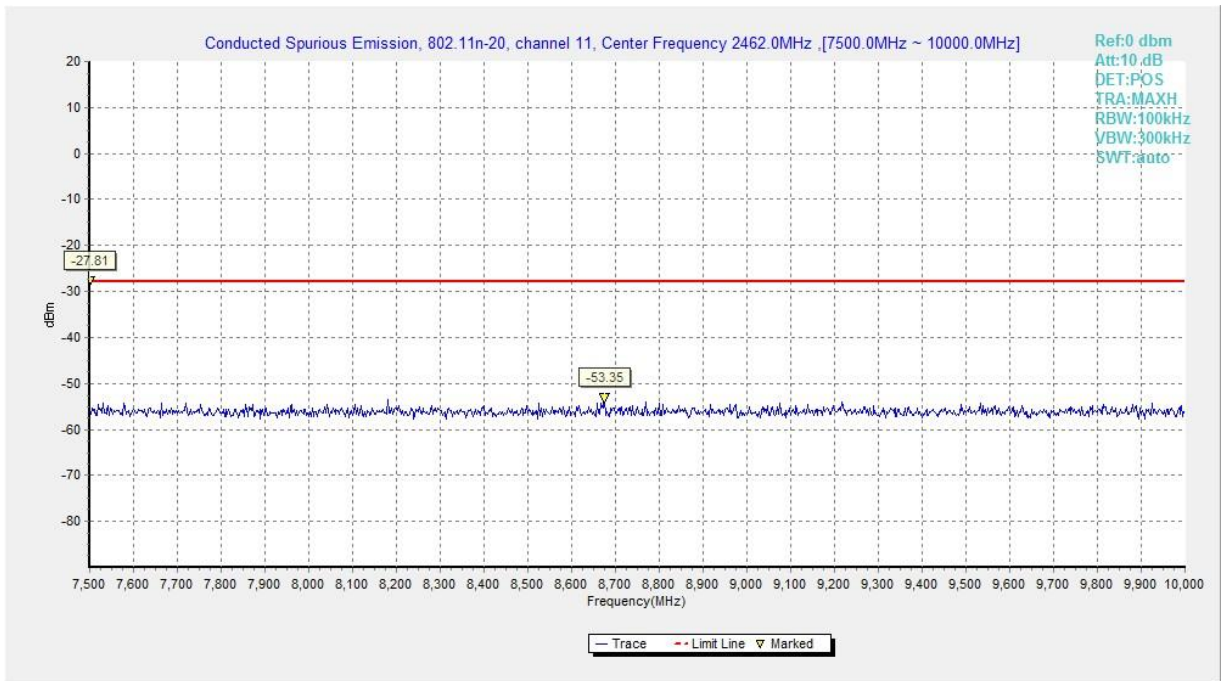


Fig.A.6.1.69 Conducted Spurious Emission (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

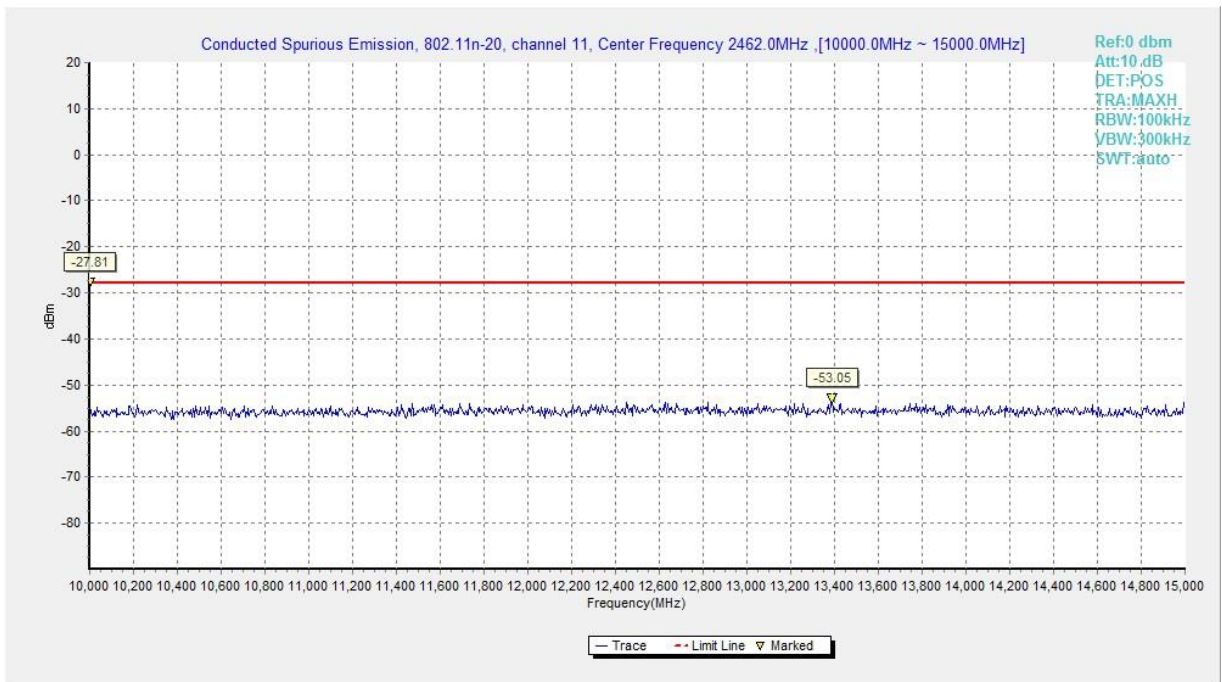


Fig.A.6.1.70 Conducted Spurious Emission (802.11n-HT20, Ch11, 10 GHz-15 GHz)

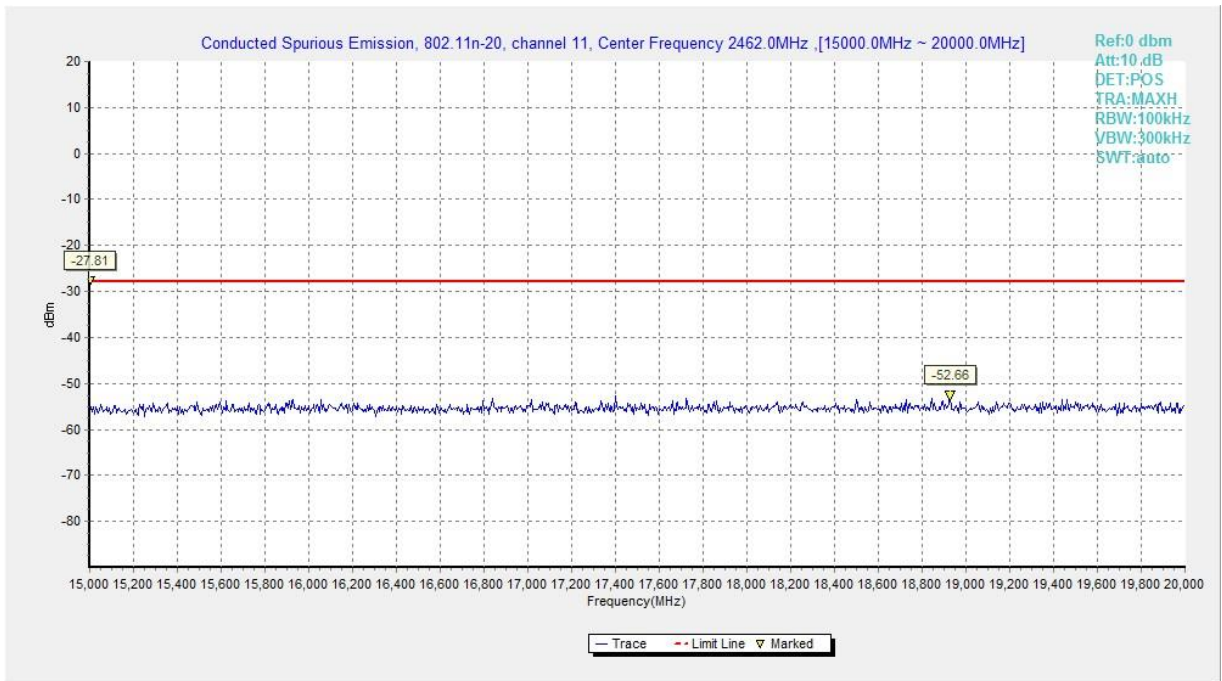


Fig.A.6.1.71 Conducted Spurious Emission (802.11n-HT20, Ch11, 15 GHz-20 GHz)

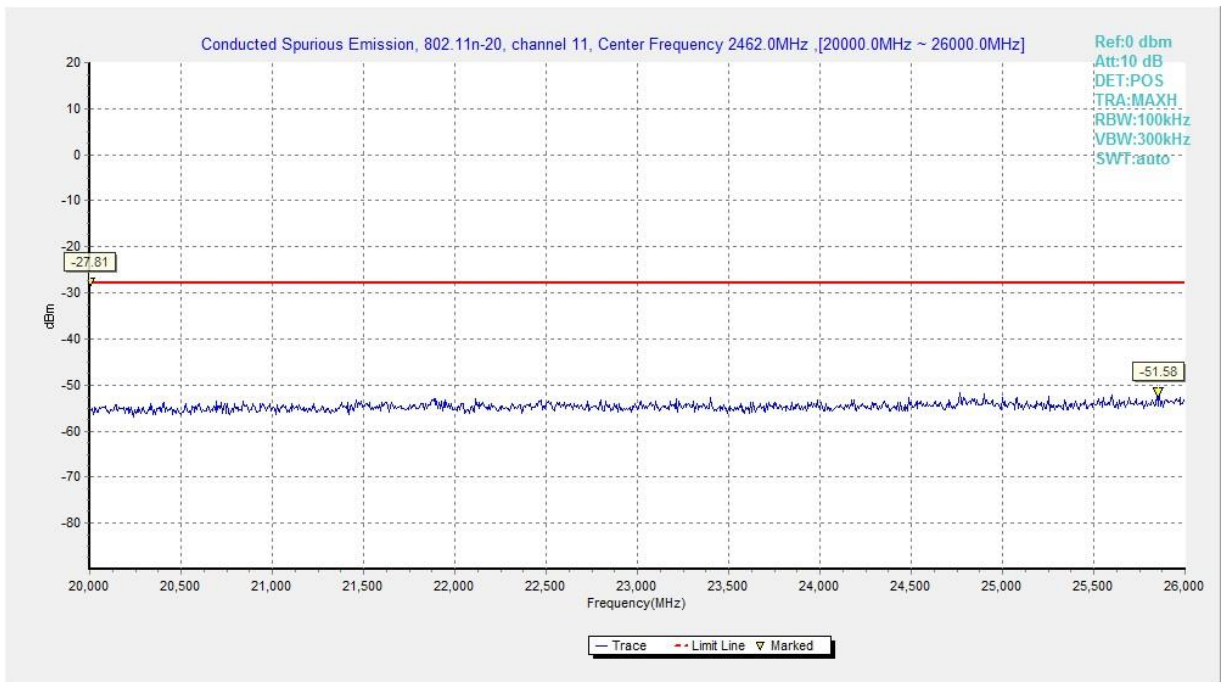


Fig.A.6.1.72 Conducted Spurious Emission (802.11n-HT20, Ch11, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)). The measurement is made according to KDB558074 D01 V03R02.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID:EUT1

Modulation type and data rate tested:

802.11b	802.11g	802.11n-HT20
11Mbps(CCK)	54Mbps(OFDM)	MCS7(OFDM)

Measurement Results:

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	P
		3 GHz ~ 18 GHz	Fig.A.6.2.3	P
	6	30 MHz ~1 GHz	Fig.A.6.2.4	P
		1 GHz ~ 3 GHz	Fig.A.6.2.5	P
		3 GHz ~ 18 GHz	Fig.A.6.2.6	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.7	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.8	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.9	P
		3 GHz ~ 18 GHz	Fig.A.6.2.10	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.11	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.12	P
		3 GHz ~ 18 GHz	Fig.A.6.2.13	P
	6	30 MHz ~1 GHz	Fig.A.6.2.14	P
		1 GHz ~ 3 GHz	Fig.A.6.2.15	P
		3 GHz ~ 18 GHz	Fig.A.6.2.16	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.17	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.18	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.19	P
		3 GHz ~ 18 GHz	Fig.A.6.2.20	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.21	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.22	P
		3 GHz ~ 18 GHz	Fig.A.6.2.23	P
	6	30 MHz ~1 GHz	Fig.A.6.2.24	P
		1 GHz ~ 3 GHz	Fig.A.6.2.25	P
		3 GHz ~ 18 GHz	Fig.A.6.2.26	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.27	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.28	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.29	P
		3 GHz ~ 18 GHz	Fig.A.6.2.30	P

Conclusion: Pass

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
f ≤ 1GHz	3.9
f > 1GHz	4.3

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2388.925	46.5	-38.8	27.7	57.600	V
17995.500	56.1	-17.7	45.6	28.200	H
17992.500	55.2	-17.7	45.6	27.300	V
17998.500	55.0	-17.7	45.6	27.100	H
17955.000	54.8	-17.7	45.6	26.900	V
17745.000	54.7	-18.5	45.6	27.600	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
17992.500	55.0	-17.7	45.6	27.100	V
17979.000	55.0	-17.7	45.6	27.100	V
18000.000	54.8	-17.7	44.5	28.000	V
17971.500	54.6	-17.7	45.6	26.700	V
17995.500	54.4	-17.7	45.6	26.500	V
17985.000	54.3	-17.7	45.6	26.400	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2484.537	47.3	-38.9	27.7	58.500	V
17959.500	54.6	-17.7	45.6	26.700	V
17965.500	54.5	-17.7	45.6	26.600	V
17973.000	54.4	-17.7	45.6	26.500	V
17860.500	54.4	-18.5	45.6	27.300	V
17614.500	54.4	-18.9	45.6	27.700	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2389.375	46.7	-38.8	27.7	57.800	H
17995.500	54.9	-17.7	45.6	27.000	V
17857.500	54.5	-18.5	45.6	27.400	V
17979.000	54.5	-17.7	45.6	26.600	V
17989.500	54.4	-17.7	45.6	26.500	V
17971.500	54.3	-17.7	45.6	26.400	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17955.000	54.6	-17.7	45.6	26.700	V
17956.500	54.5	-17.7	45.6	26.600	V
17988.000	54.4	-17.7	45.6	26.500	V
17965.500	54.4	-17.7	45.6	26.500	V
17992.500	54.3	-17.7	45.6	26.400	V
17985.000	54.1	-17.7	45.6	26.200	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2484.750	47.6	-38.9	27.7	58.800	V
17998.500	54.9	-17.7	45.6	27.000	V
18000.000	54.4	-17.7	44.5	27.600	V
17988.000	54.3	-17.7	45.6	26.400	H
17920.500	54.3	-17.7	45.6	26.400	V
17986.500	54.2	-17.7	45.6	26.300	V

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2388.800	47.0	-38.8	27.7	58.100	V
17991.000	56.2	-17.7	45.6	28.300	H
17989.500	55.3	-17.7	45.6	27.400	V
17967.000	55.0	-17.7	45.6	27.100	V
17992.500	54.9	-17.7	45.6	27.000	V
17998.500	54.8	-17.7	45.6	26.900	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
17997.000	54.8	-17.7	45.6	26.900	V
17985.000	54.6	-17.7	45.6	26.700	V
17815.500	54.6	-18.5	45.6	27.500	V
17989.500	54.6	-17.7	45.6	26.700	H
17988.000	54.4	-17.7	45.6	26.500	V
17959.500	54.3	-17.7	45.6	26.400	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2484.493	47.2	-38.9	27.7	58.400	V
18000.000	55.6	-17.7	44.5	28.800	H
17832.000	54.7	-18.5	45.6	27.600	V
17895.000	54.5	-18.5	45.6	27.400	V
17995.500	54.5	-17.7	45.6	26.600	V
17914.500	54.5	-17.7	45.6	26.600	V

Test graphs as below:

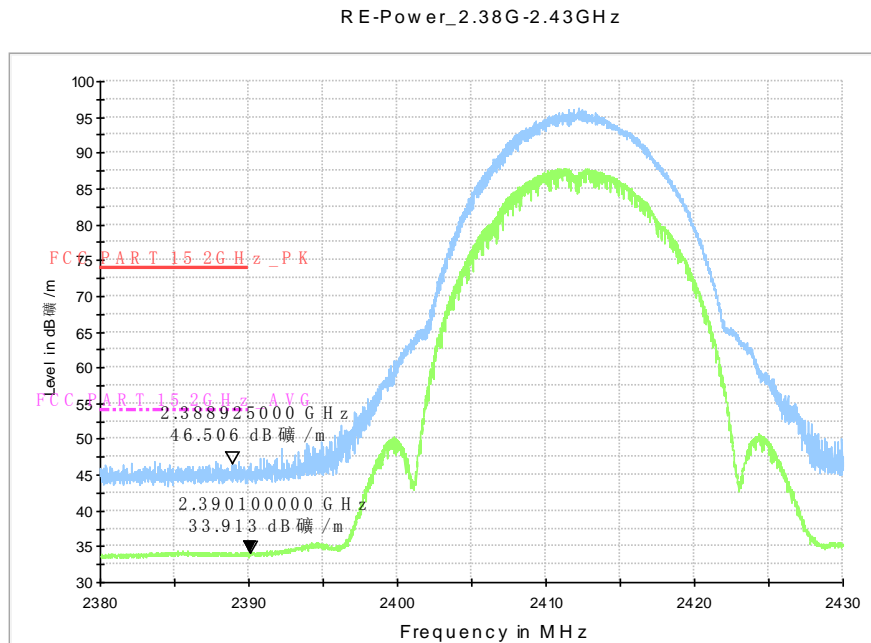


Fig.A.6.2.1 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz – 2.45GHz

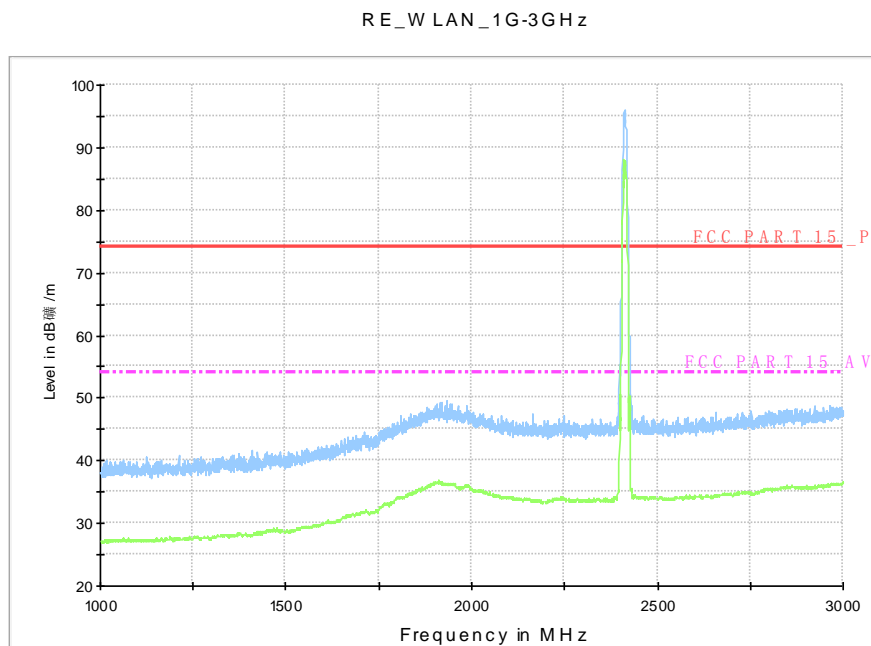


Fig.A.6.2.2 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-3 GHz)

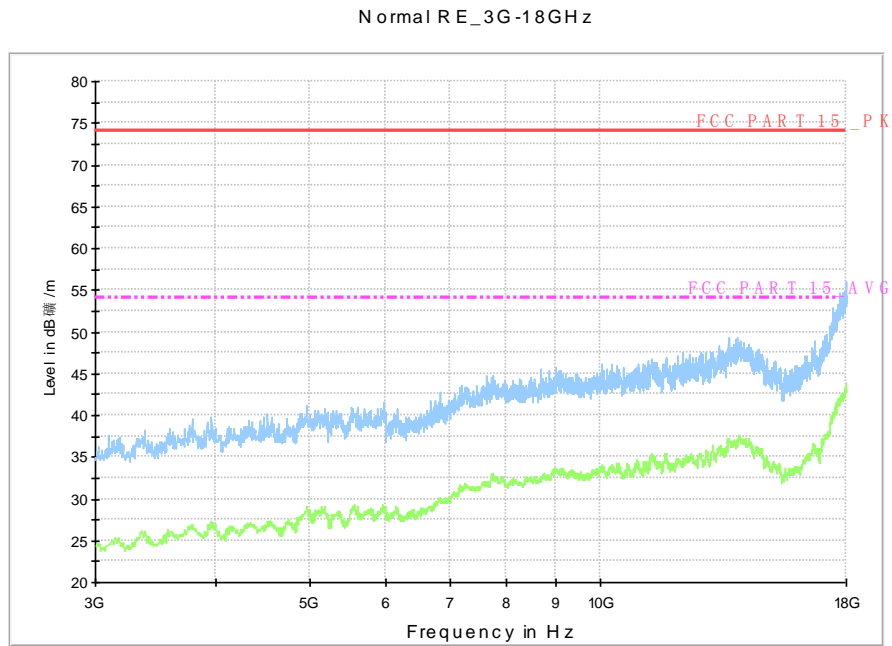


Fig.A.6.2.3 Radiated Spurious Emission (802.11b, Ch1, 3 GHz-18 GHz)

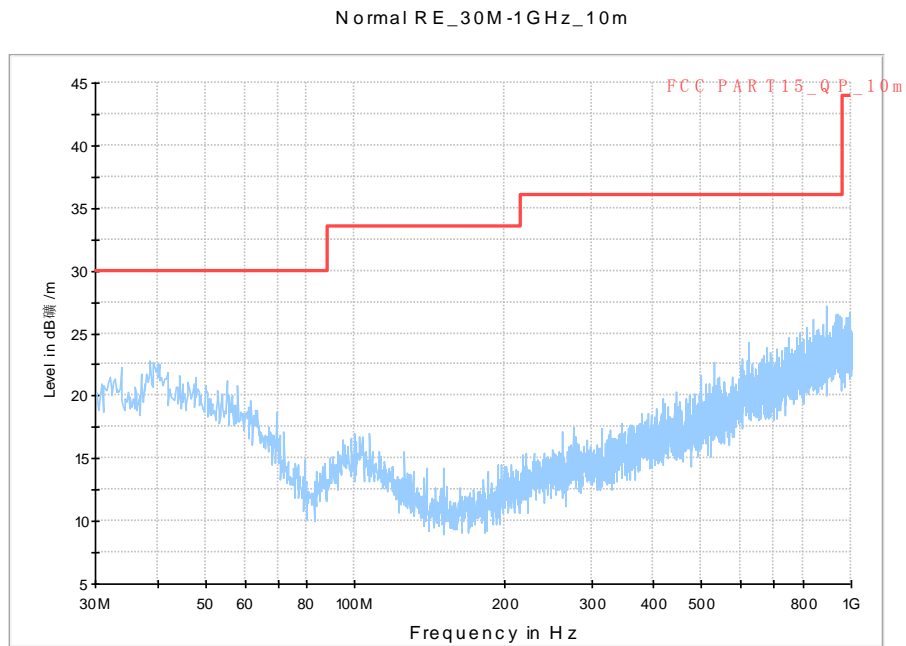


Fig.A.6.2.4 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

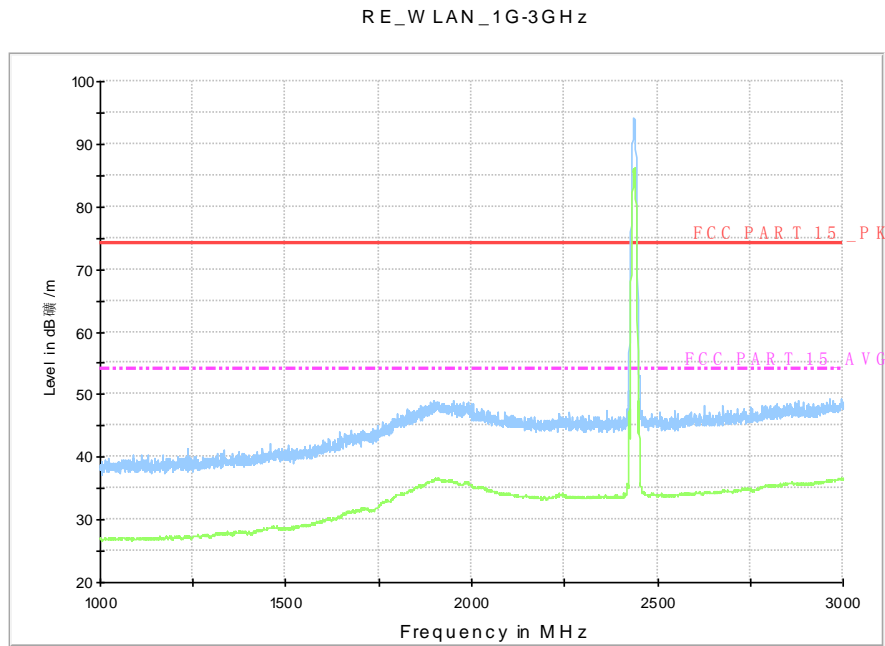


Fig.A.6.2.5 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-3 GHz)

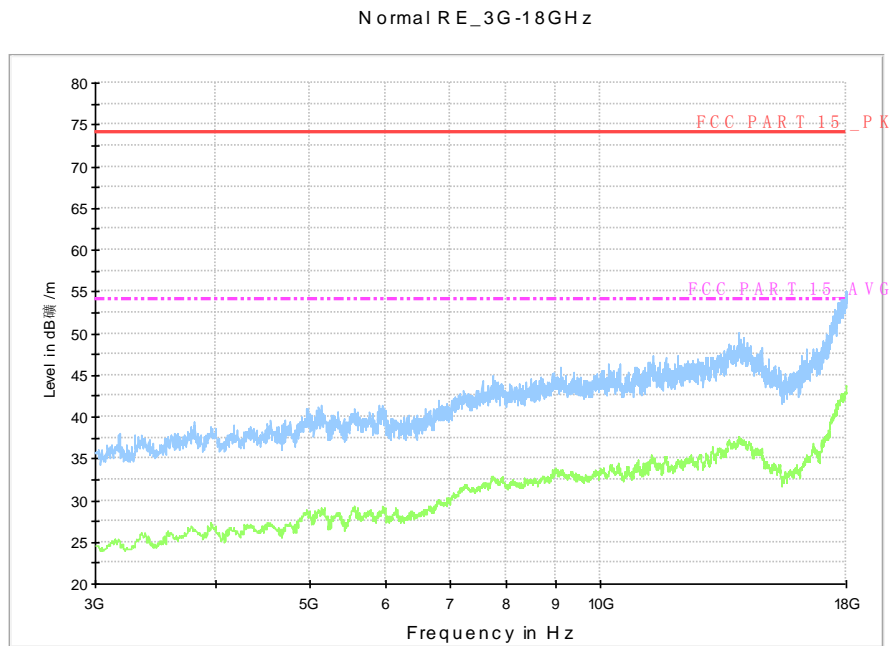


Fig.A.6.2.6 Radiated Spurious Emission (802.11b, Ch6, 3 GHz-18 GHz)

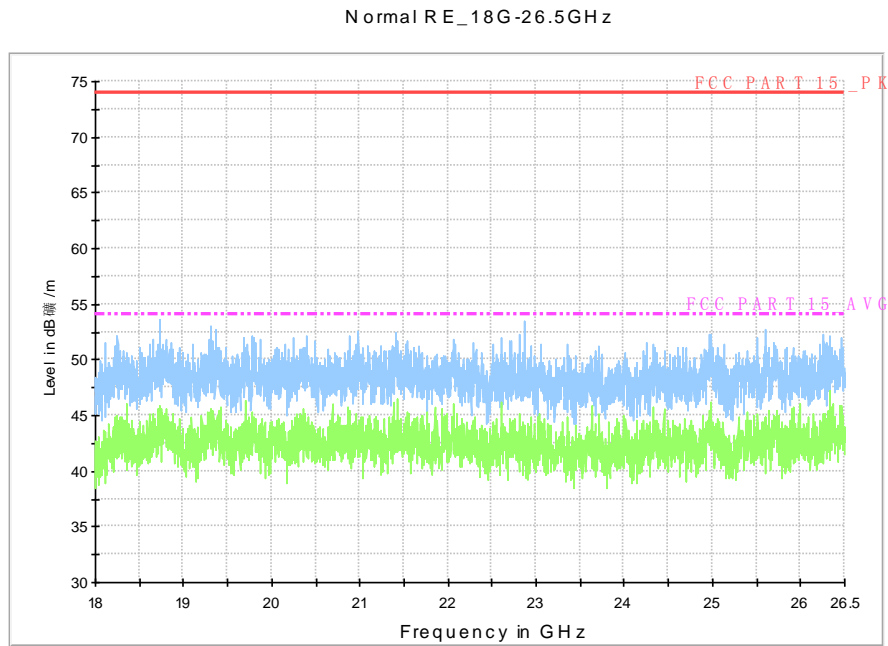


Fig.A.6.2.7 Radiated Spurious Emission (802.11b, Ch6, 18GHz – 26.5GHz)

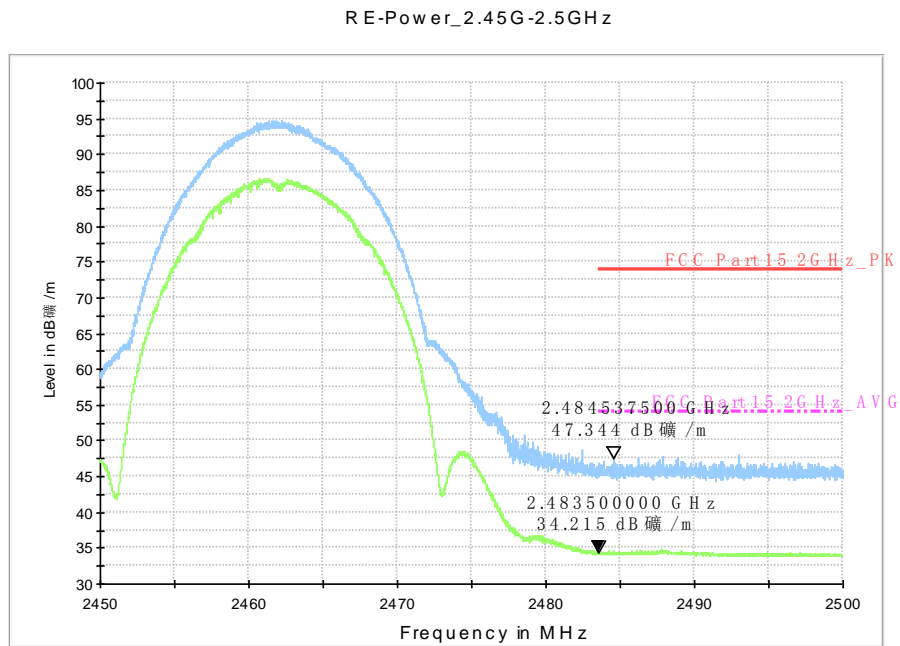


Fig.A.6.2.8 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

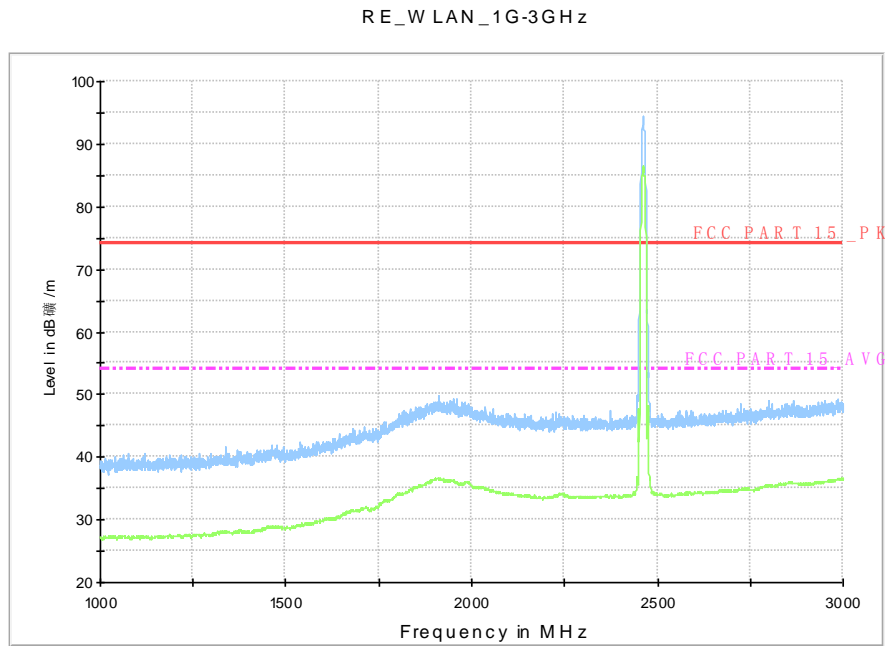


Fig.A.6.2.9 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-3 GHz)

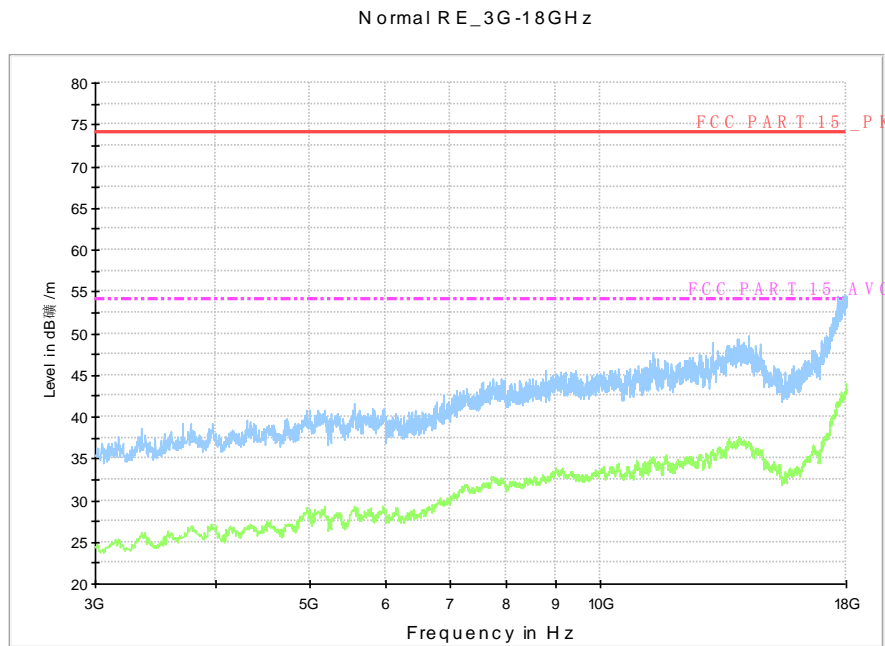


Fig.A.6.2.10 Radiated Spurious Emission (802.11b, Ch11, 3 GHz-18 GHz)

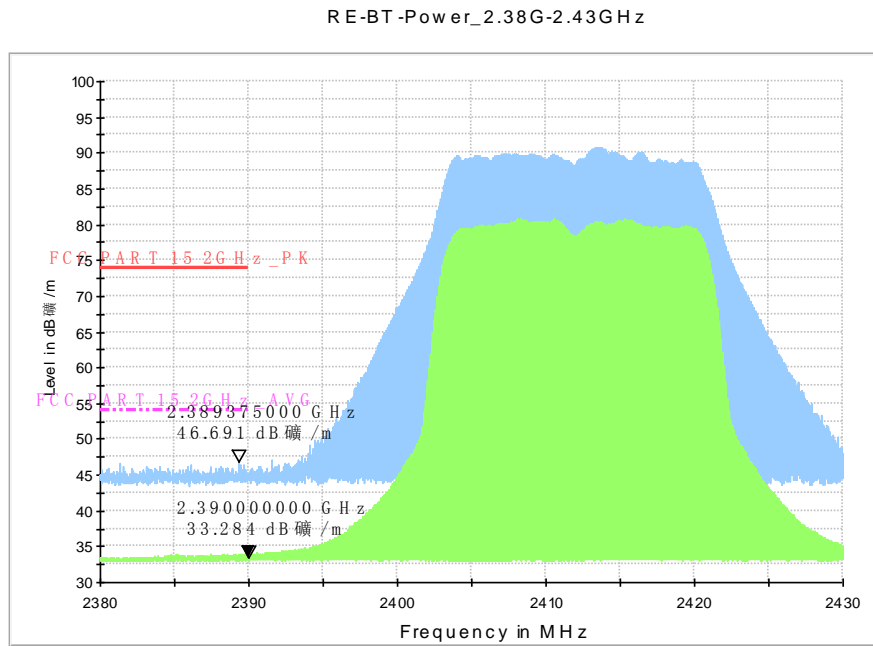


Fig.A.6.2.11 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

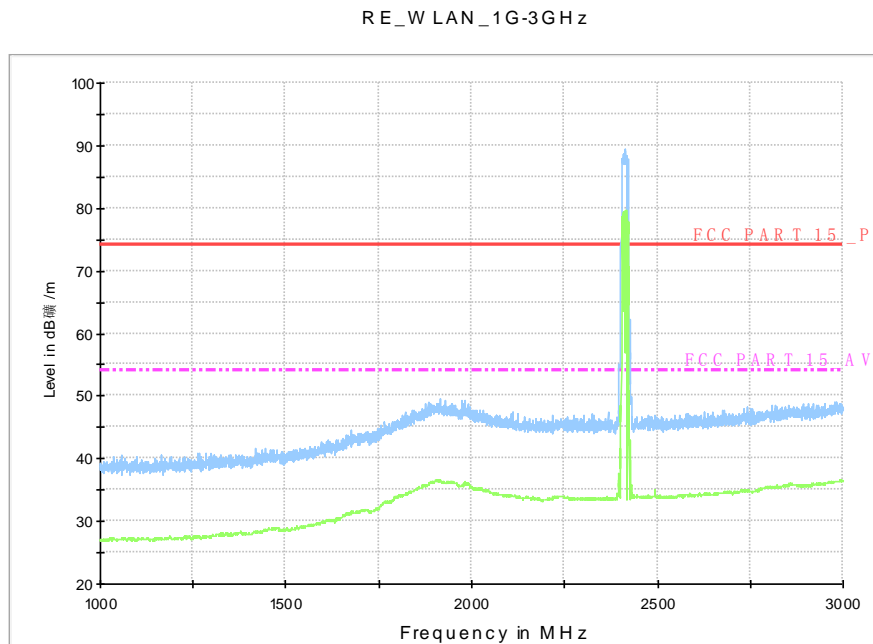


Fig.A.6.2.12 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-3 GHz)

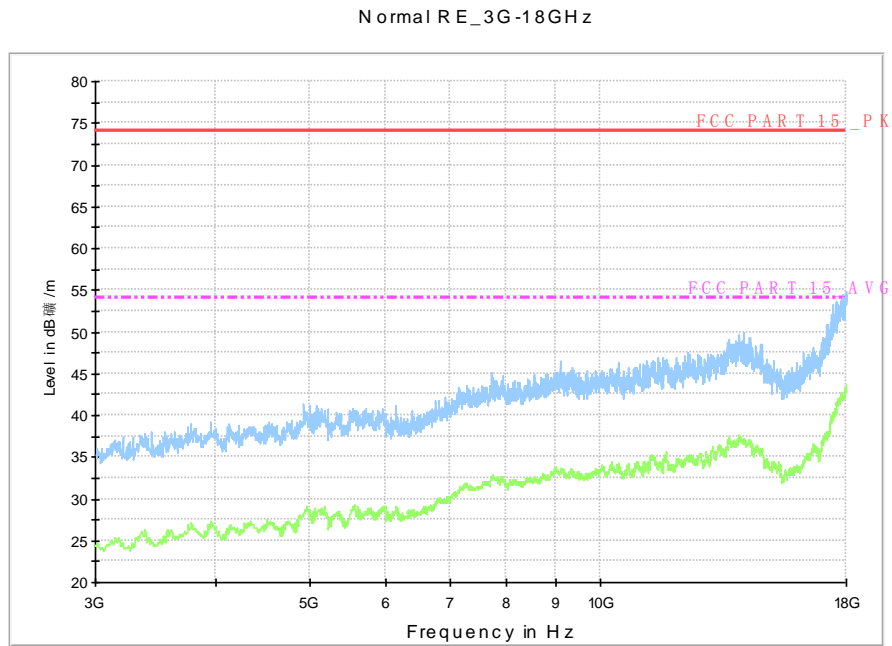


Fig.A.6.2.13 Radiated Spurious Emission (802.11g, Ch1, 3 GHz-18 GHz)

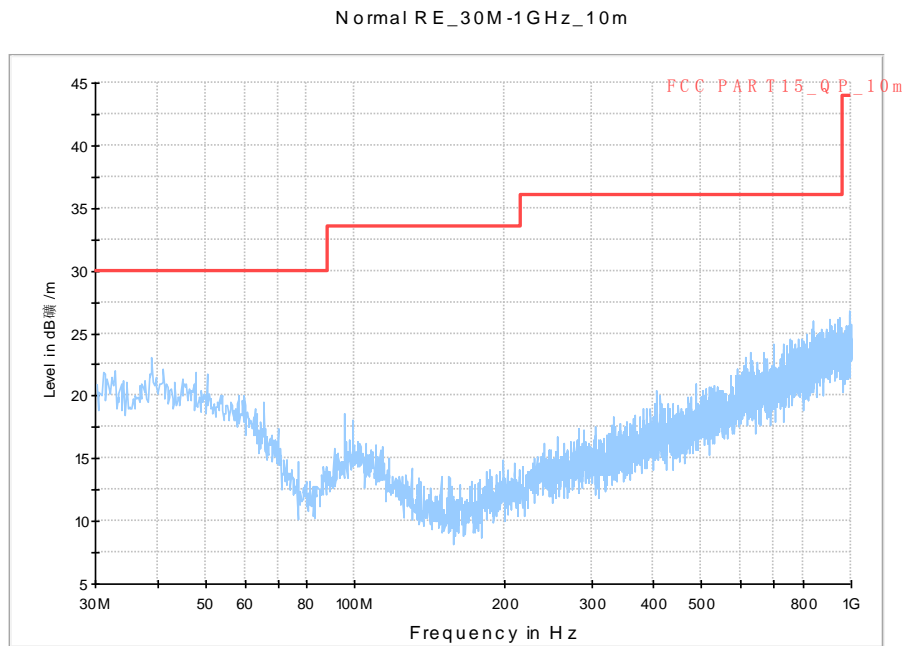


Fig.A.6.2.14 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

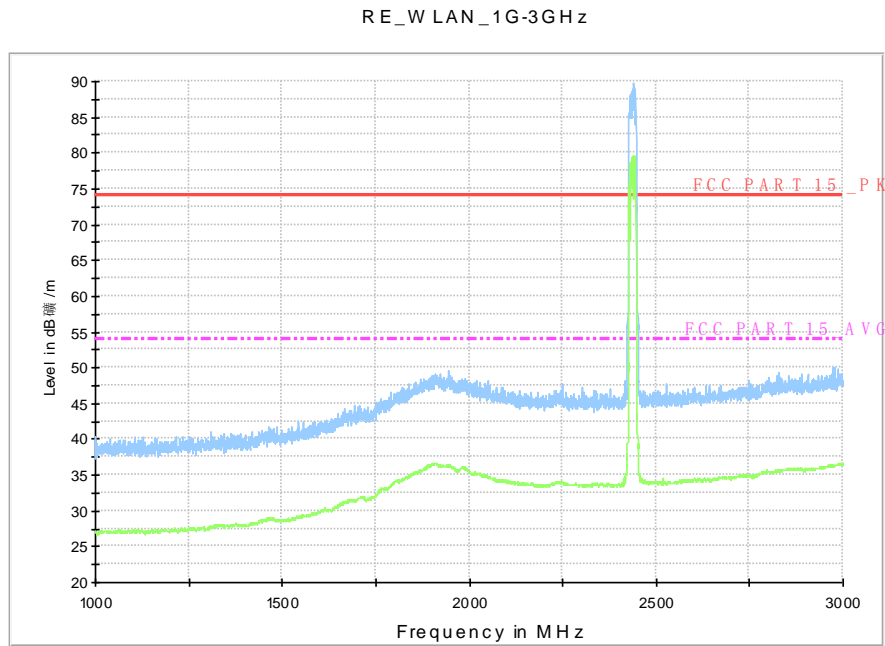


Fig.A.6.2.15 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-3 GHz)

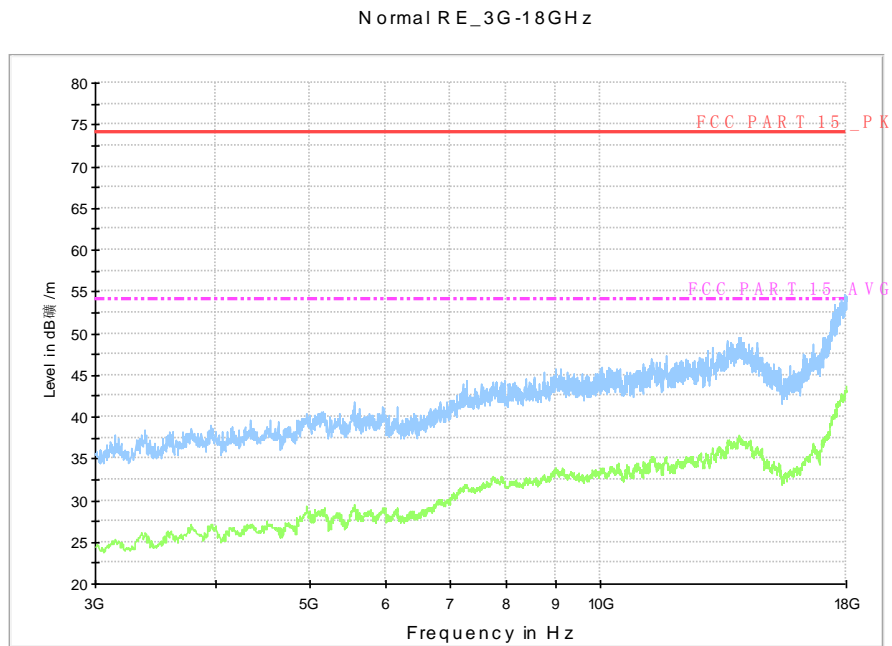


Fig.A.6.2.16 Radiated Spurious Emission (802.11g, Ch6, 3 GHz-18 GHz)

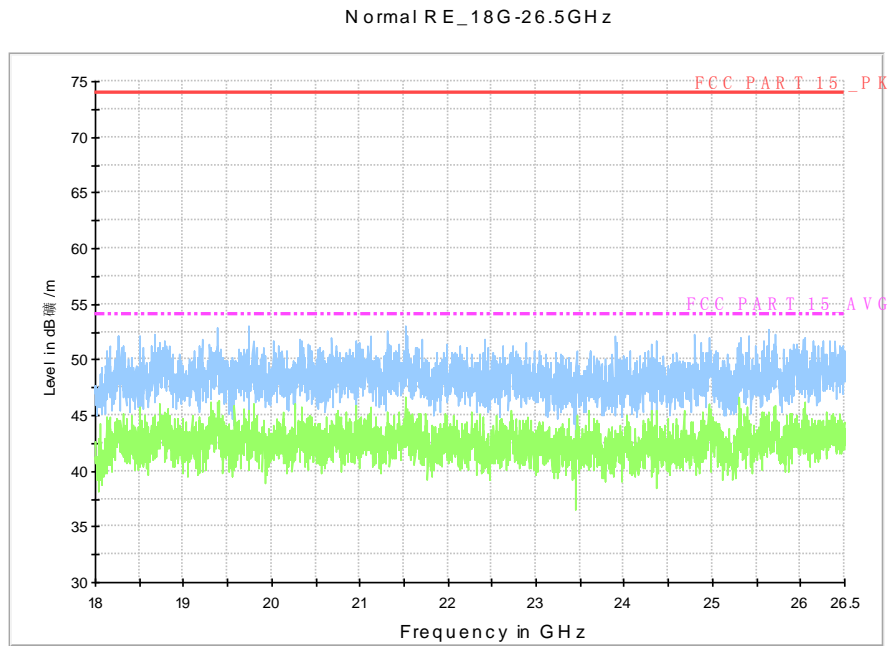


Fig.A.6.2.17 Radiated Spurious Emission (802.11g, Ch6, 18GHz – 26.5GHz)

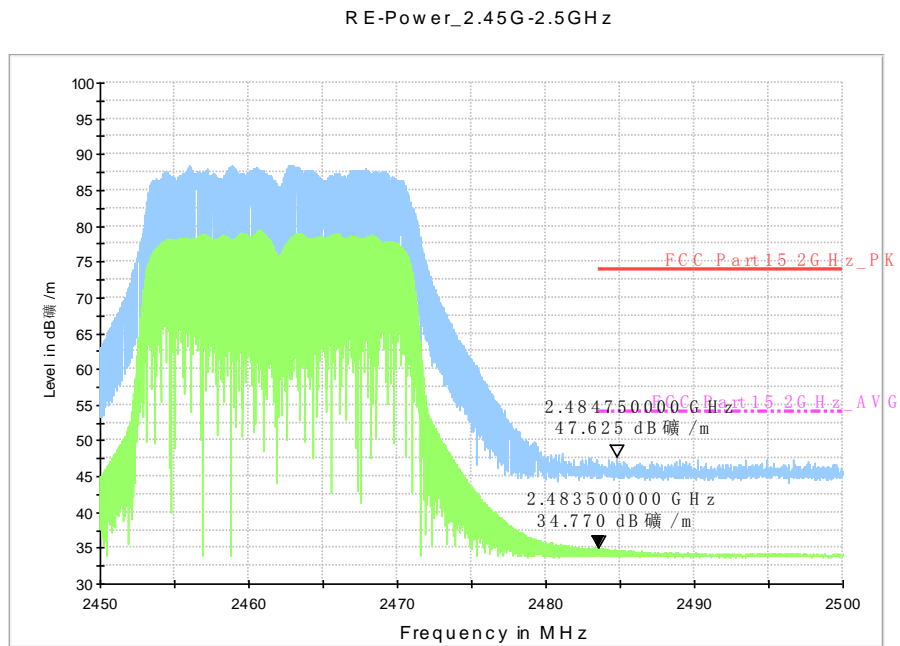


Fig.A.6.2.18 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

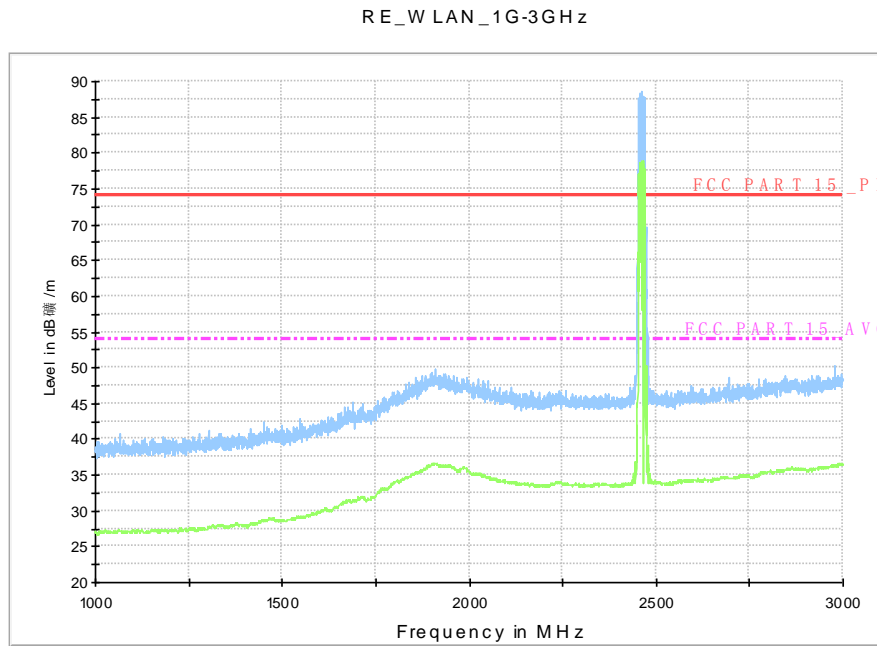


Fig.A.6.2.19 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-3 GHz)

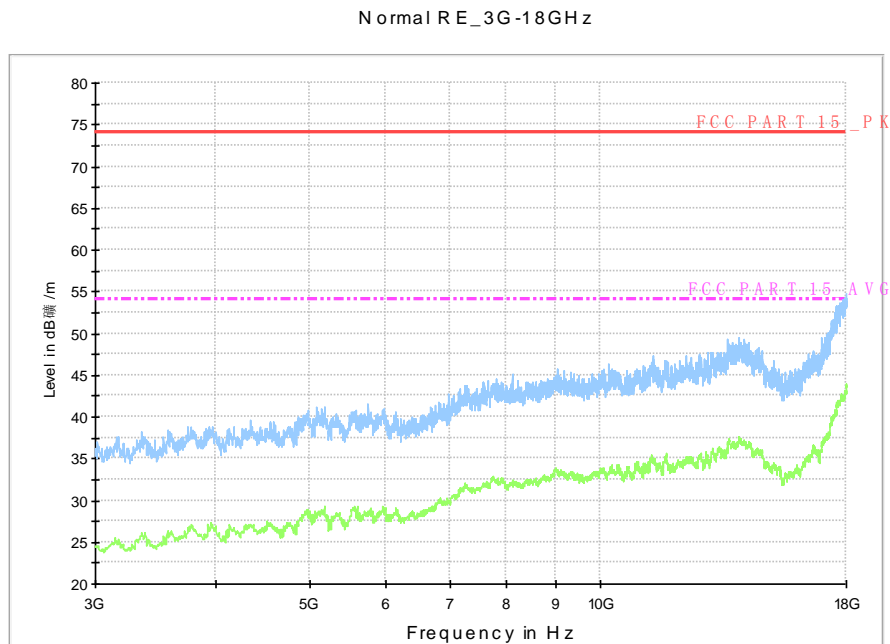


Fig.A.6.2.20 Radiated Spurious Emission (802.11g, Ch11, 3 GHz-18 GHz)

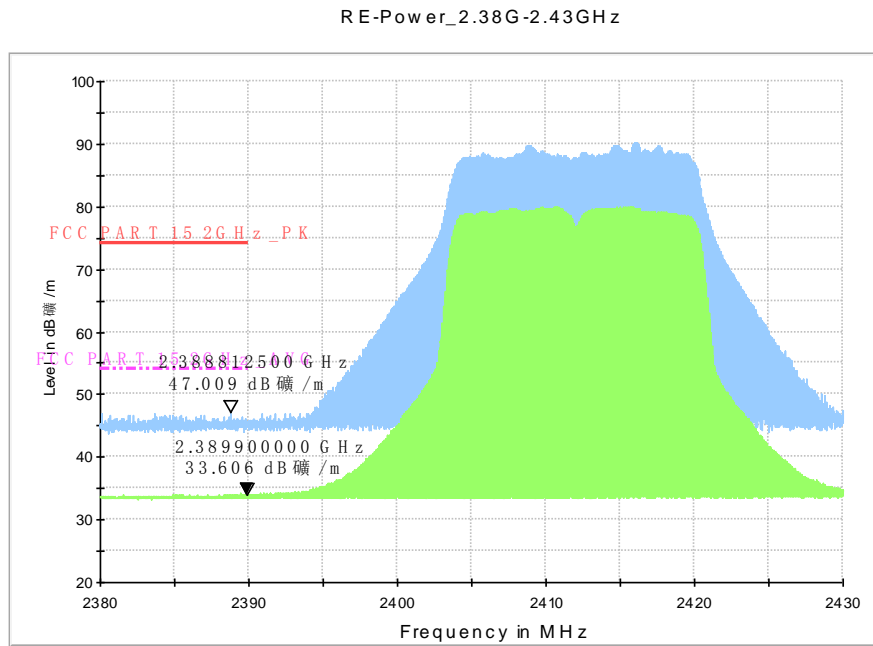


Fig.A.6.2.21 Radiated Spurious Emission (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

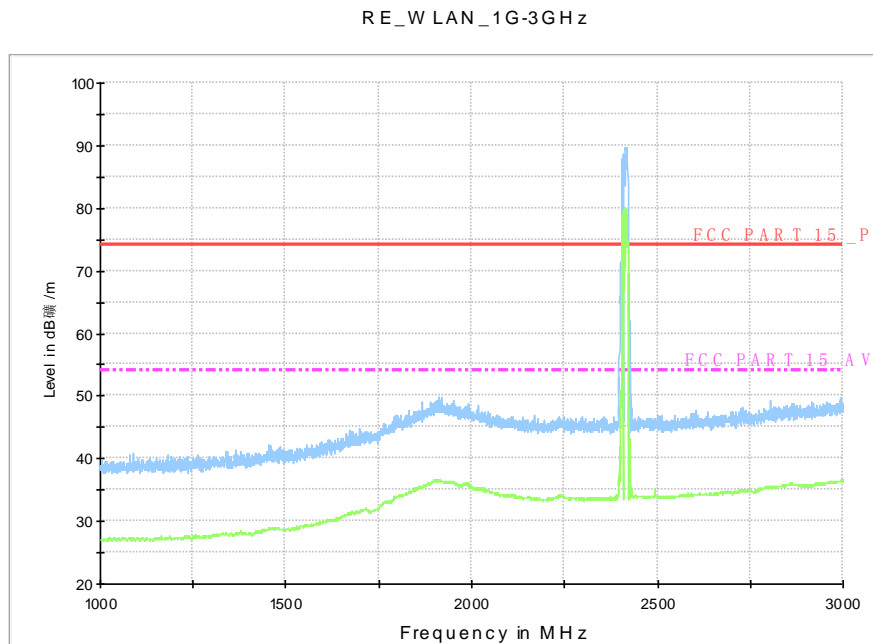


Fig.A.6.2.22 Radiated Spurious Emission (802.11n-HT20, Ch1, 1 GHz-3 GHz)

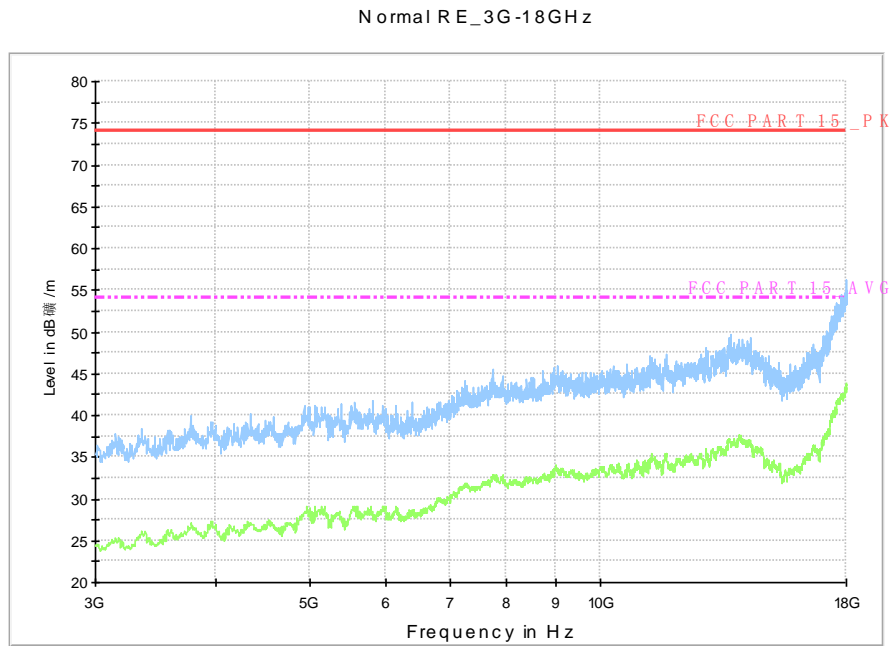


Fig.A.6.2.23 Radiated Spurious Emission (802.11n-HT20, Ch1, 3 GHz-18 GHz)

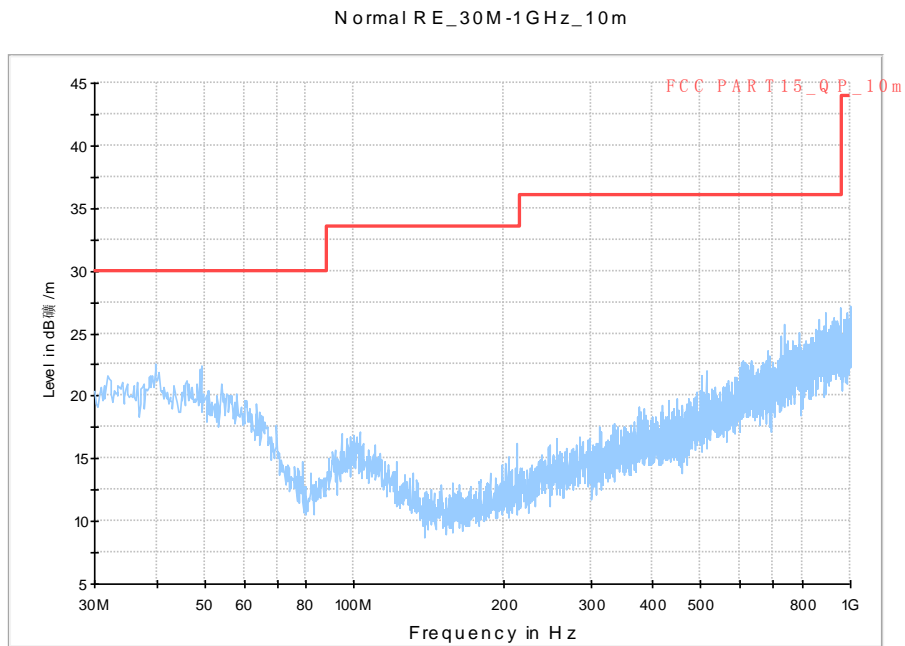


Fig.A.6.2.24 Radiated Spurious Emission (802.11n-HT20, Ch6, 30 MHz-1 GHz)

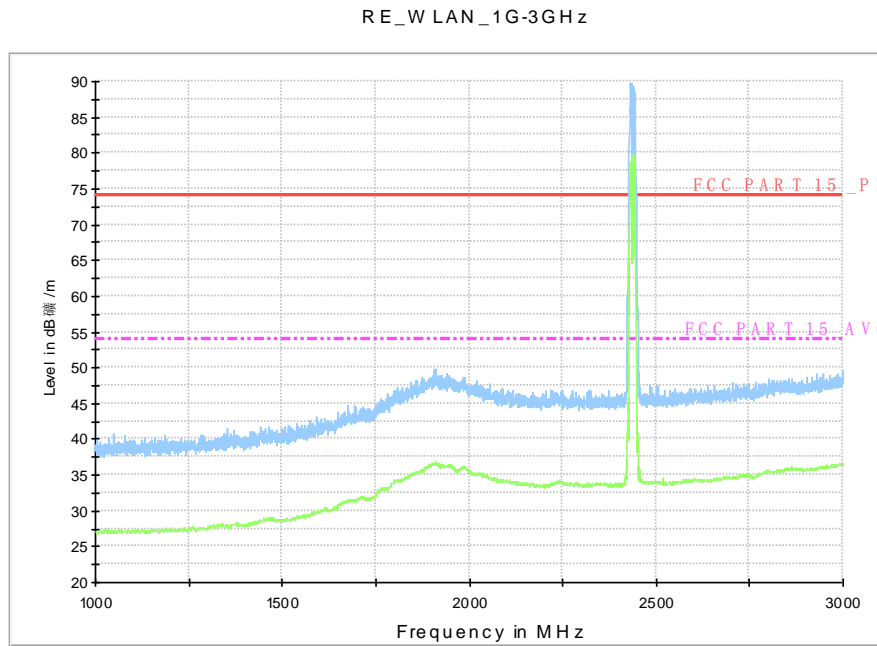


Fig.A.6.2.25 Radiated Spurious Emission (802.11n-HT20, Ch6, 1 GHz-3 GHz)

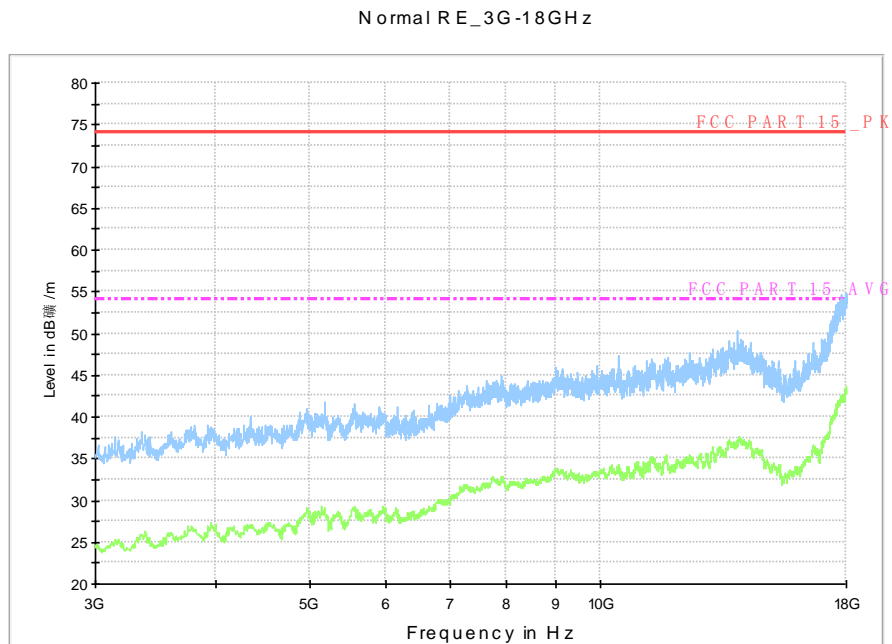


Fig.A.6.2.26 Radiated Spurious Emission (802.11n-HT20, Ch6, 3 GHz-18 GHz)

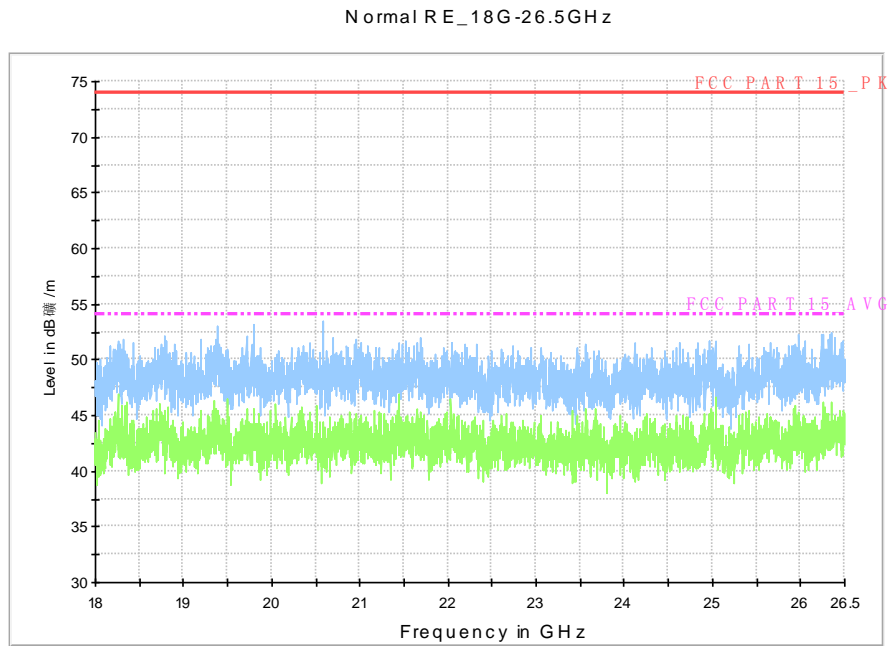


Fig.A.6.2.27 Radiated Spurious Emission (802.11n-HT20, Ch6, 18GHz – 26.5GHz)

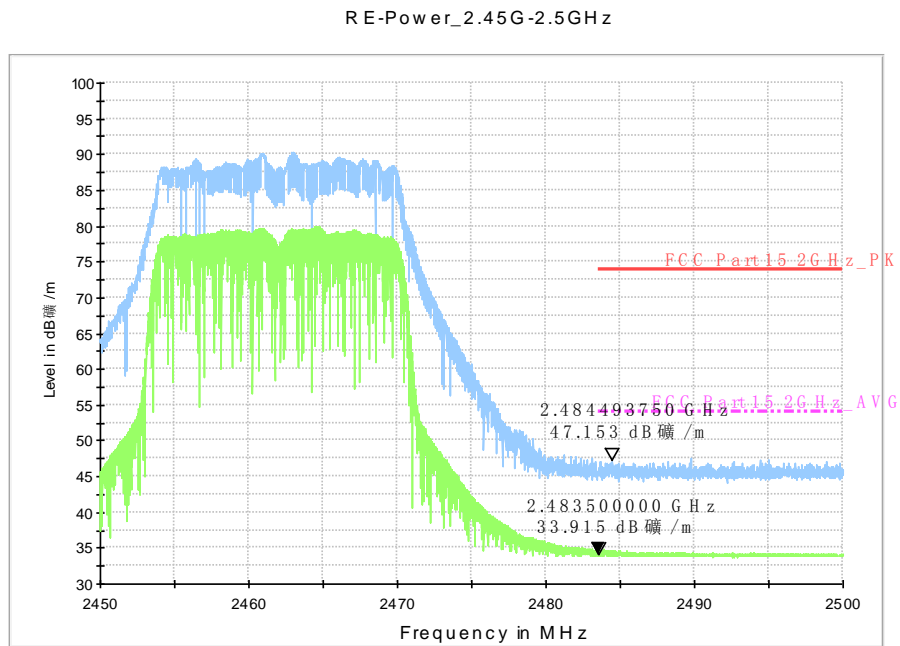


Fig.A.6.2.28 Radiated Spurious Emission (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

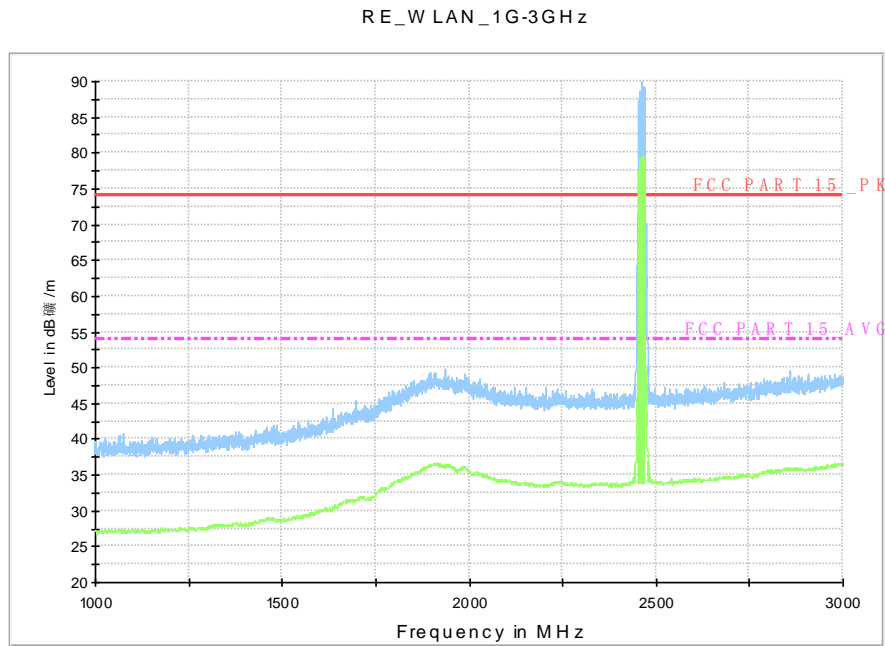


Fig.A.6.2.29 Radiated Spurious Emission (802.11n-HT20, Ch11, 1 GHz-3 GHz)

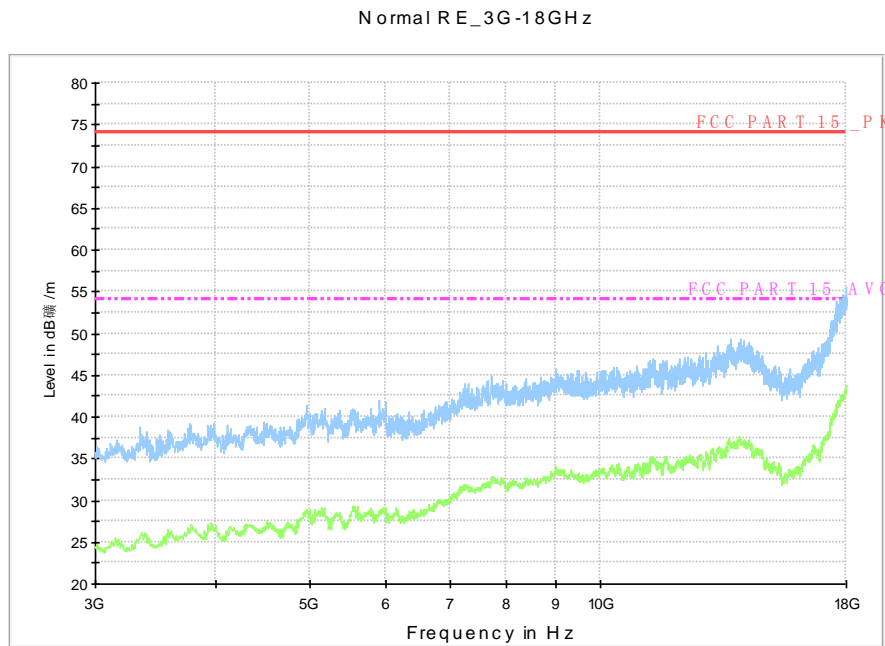


Fig.A.6.2.30 Radiated Spurious Emission (802.11n-HT20, Ch11, 3 GHz-18 GHz)

A.7. Spurious Emissions Radiated < 30MHz

Measurement Limit:

Frequency (MHz)	Field strength($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Results:

Mode	Frequency Range	Test Results	Conclusion
802.11b	9 kHz ~30 MHz	Fig.A.7.1	P

Conclusion: PASS

Test graphs as below:

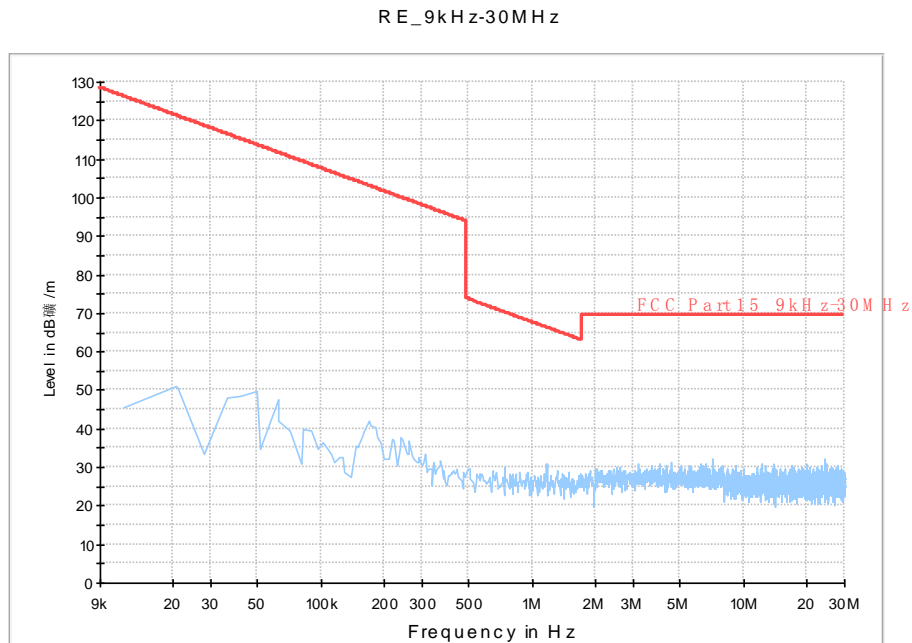


Fig.A.7.1 Radiated Spurious Emission (802.11b, 9 kHz ~30 MHz)

A.8. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.8.1	Fig.A.8.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.2dB, k=2.

Test graphs as below:

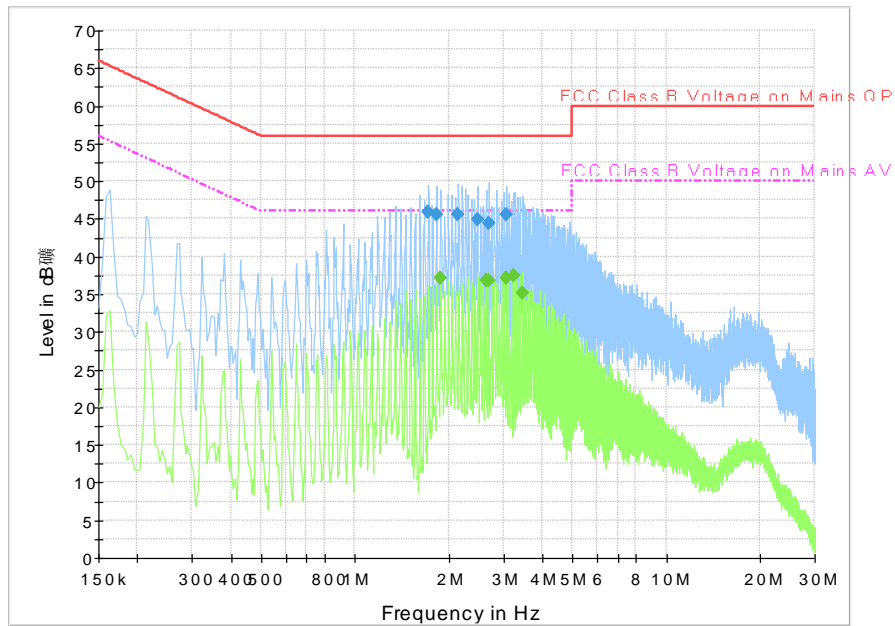


Fig.A.8.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.720500	45.9	GND	N	9.7	10.1	56.0
1.828500	45.6	GND	N	9.7	10.4	56.0
2.148000	45.5	GND	N	9.7	10.5	56.0
2.472000	44.9	GND	N	9.7	11.1	56.0
2.688000	44.4	GND	N	9.7	11.6	56.0
3.066000	45.5	GND	N	9.7	10.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.882500	37.1	GND	N	9.7	8.9	46.0
2.634000	36.9	GND	N	9.7	9.1	46.0
2.688000	36.7	GND	N	9.7	9.3	46.0
3.066000	37.1	GND	N	9.7	8.9	46.0
3.228000	37.5	GND	N	9.7	8.5	46.0
3.444000	35.1	GND	N	9.7	10.9	46.0

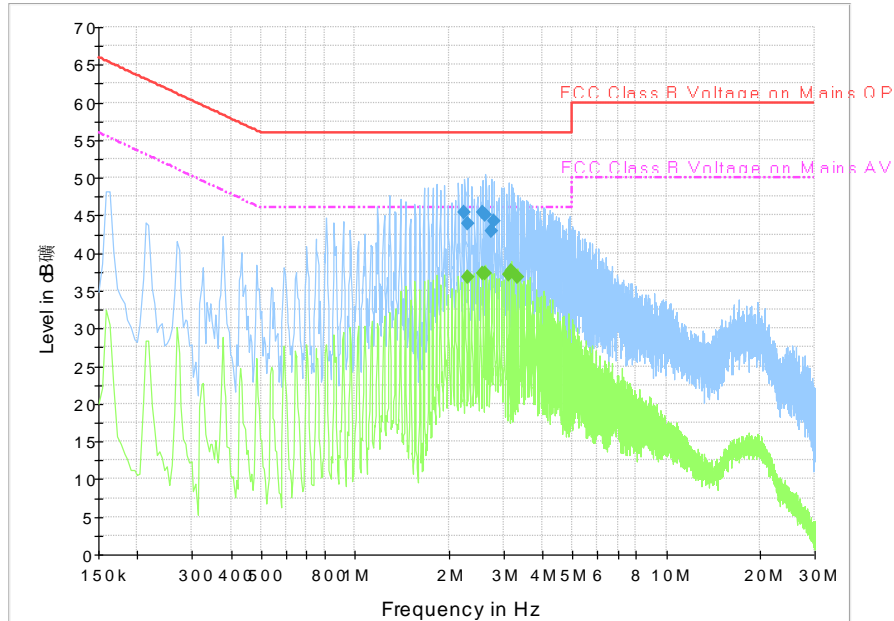


Fig.A.8.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
2.251500	45.4	GND	N	9.7	10.6	56.0
2.310000	44.0	GND	N	9.7	12.0	56.0
2.575500	45.4	GND	N	9.7	10.6	56.0
2.629500	45.1	GND	N	9.7	10.9	56.0
2.742000	42.9	GND	N	9.7	13.1	56.0
2.791500	44.2	GND	N	9.7	11.8	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
2.310000	36.8	GND	N	9.7	9.2	46.0
2.575500	37.3	GND	N	9.7	8.7	46.0
2.629500	37.3	GND	N	9.7	8.7	46.0
3.115500	37.1	GND	N	9.7	8.9	46.0
3.169500	37.7	GND	N	9.7	8.3	46.0
3.331500	36.8	GND	N	9.7	9.2	46.0

*** END OF REPORT BODY ***