



TEST REPORT

Report No.: SRTC2014-H024-E0054

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Marketing Name: ONE TOUCH 7040E

Product Model: Yaris-5

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part 15, Subpart C (October 9, 2012 edition)

FCC ID: RAD520

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report.....	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details.....	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details	5
2. Test information.....	7
2.1 Summary of the test results	7
2.2 Test result.....	8
2.2.1 Peak Power Output.....	8
2.2.2 Occupied Bandwidth	17
2.2.3 Transmitter Power Spectral Density	26
2.2.4 Spurious RF Conducted Emissions.....	35
2.2.5 Spurious Radiated Emissions	60
2.2.6 Band Edge Compliance	72
2.2.7 AC Power line Conducted Emission.....	91
2.3. Measurement Uncertainty	93
2.4. List of test equipment.....	94
Appendix.....	95

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Grantee Code: RAD
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.4 Manufacturer's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.5 Application details

Date of reception of test sample: 9th September 2013

Date of test: 9th September 2013 to 25th July 2014

1.6 Reference specification

FCC Part 15, Subpart C (October 9, 2012 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD520
Frequency Range	2.4GHz~2.4835GHz
Number of Channel	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	1Mbps/2Mbps/5.5Mbps/11Mbps/6Mbps/9Mbps/12Mbps /18Mbps/24Mbps/36Mbps/48Mbps/54Mbps/6.5Mbps /13.0Mbps/13.5Mbps/19.5Mbps/26.0Mbps/27.0Mbps /39.0Mbps/40.5Mbps/52.0Mbps/58.5Mbps/65Mbps /81.0Mbps/108.0Mbps/121.5Mbps/135.0Mbps
Transmit Mode	Continuously
Duty Cycles	98%
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.8V
HW Version	BAB33A000EC1
SW Version	AQU

1.7.2 EUT details

Product Name	Marketing Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	ONE TOUCH 7040E	Yaris-5	863603020000078

1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	Ten Pao Industrial Co., Ltd.
Model Number	S005UU0500100
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	TUUS050100-A00
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi020F1
Capacity	2000mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi019B1
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Model Number	TLi019B2
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122002C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122002C2

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122005C1




Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122005C2

Note: As the information described above, there are two different models of charger manufactured by two different companies, three different models of battery manufactured by two different companies and four different models of data cable manufactured by two different companies. The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger, one model of battery and one model of data cable) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger S005UU0500100, the battery TLi020F1 and the data cable CDA3122002C1.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Peak Power Output	15.247(b)(3)	Pass
2	Occupied Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e)	Pass
4	Spurious RF Conducted Emissions	15.247(d)	Pass
5	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
6	Band Edge Compliance	15.247(d)	Pass
7	AC Power line Conducted Emission	15.207	Pass

This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab 	Checked by: Mr. Wang Junfeng Deputy director of the test lab 
Tested by: Mr. Jiang Shuo Test engineer 	Issued date: 2014.07.29

2.2 Test result

2.2.1 Peak Power Output

2.2.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa


2.2.1.2 Test Description

The measurement is made according to KDB 558074 D01 DTS Meas Guidance v03r01 Section 9.1.1.

WIFI is operating in 98% Duty Factor mode.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 x RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

The used resolution bandwidth in output power measuring is 20MHz for 802.11b/802.11g/802.11n(HT20) and 40MHz for 802.11n(HT40).

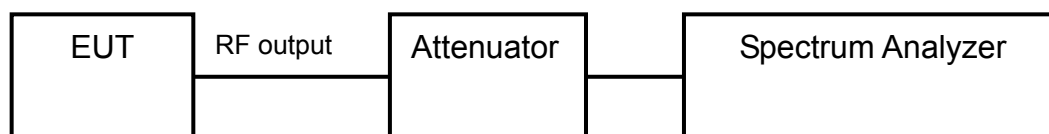

2.2.1.3 Test limit

FCC Part15.247(b)(3):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

2.2.1.4 Test result


Modulation type		Average power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	15.74	15.74	15.92
	2 Mbps	15.72	15.73	15.79
	5.5 Mbps	16.51	16.57	16.68
	11 Mbps	16.13	16.25	16.17
11g	6 Mbps	12.91	13.82	12.80
	9 Mbps	12.95	13.86	12.93
	12 Mbps	12.79	13.78	12.96
	18 Mbps	12.89	13.78	13.02
	24 Mbps	12.91	13.96	12.84
	36 Mbps	12.71	14.12	12.97
	48 Mbps	12.76	14.19	12.99
11n HT20	54 Mbps	12.70	13.79	13.18
	6.5 Mbps	12.75	14.18	13.17
	13 Mbps	12.80	13.92	12.96
	19.5 Mbps	12.83	13.96	13.19
	26 Mbps	12.90	14.03	13.02
	39 Mbps	12.68	13.90	13.03
	52 Mbps	12.79	13.95	13.13
	58.5 Mbps	12.75	13.92	13.10
65 Mbps	12.89	14.05	13.19	

Modulation type		Average power output (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	10.66	13.72	13.75
	27 Mbps	10.67	13.79	13.82
	40.5 Mbps	10.57	13.72	13.67
	54 Mbps	10.79	13.79	14.23
	81 Mbps	10.43	13.57	13.87
	108 Mbps	10.39	13.67	13.56
	121.5 Mbps	10.58	13.89	13.91
	135 Mbps	10.77	14.01	13.94


Modulation type		Peak power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	19.42	19.48	19.60
	2 Mbps	19.39	19.40	19.55
	5.5 Mbps	19.31	19.30	19.47
	11 Mbps	19.24	19.36	19.51
11g	6 Mbps	22.69	23.08	23.08
	9 Mbps	22.84	23.10	23.12
	12 Mbps	22.71	23.10	23.15
	18 Mbps	22.79	23.16	23.14
	24 Mbps	22.69	23.19	23.08
	36 Mbps	22.69	23.11	23.22
	48 Mbps	22.65	23.18	23.10
	54 Mbps	22.71	23.21	23.04
11n HT20	6.5 Mbps	22.87	23.39	23.41
	13 Mbps	22.92	23.32	23.35
	19.5 Mbps	22.81	23.33	23.30
	26 Mbps	22.91	23.32	23.27
	39 Mbps	22.67	23.34	23.26
	52 Mbps	22.71	23.35	23.34
	58.5 Mbps	22.76	23.24	23.22
	65 Mbps	22.85	23.34	23.37

Modulation type		Peak power output (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	23.01	24.20	24.38
	27 Mbps	22.87	23.98	23.89
	40.5 Mbps	22.67	23.78	23.67
	54 Mbps	22.84	23.66	23.76
	81 Mbps	22.34	23.98	23.89
	108 Mbps	22.67	23.88	24.01
	121.5 Mbps	22.28	23.74	23.91
	135 Mbps	22.19	23.64	23.95


* The data rate 1Mbps, 36Mbps, 6.5Mbps, 13.5Mbps are selected as worse condition, and the following cases are performed with this condition.

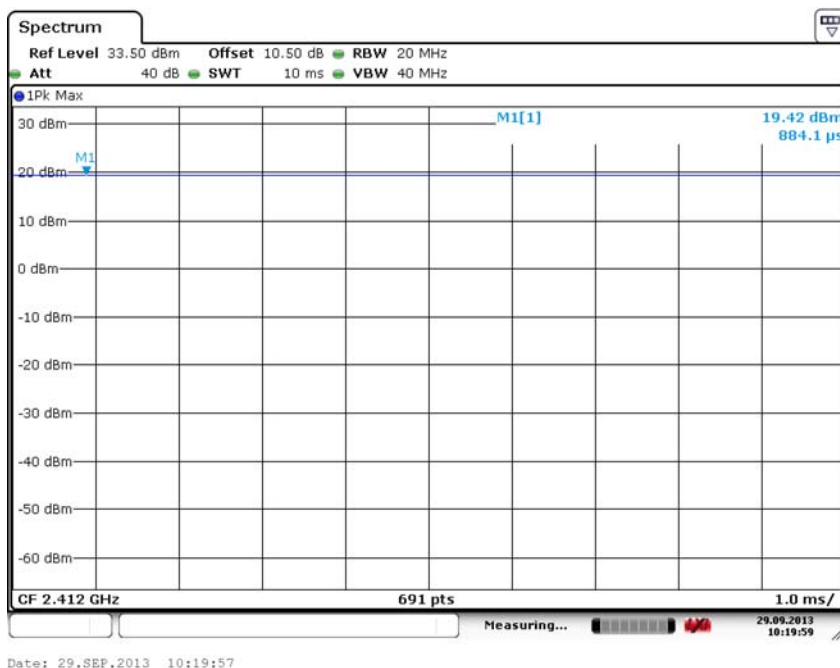


Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b

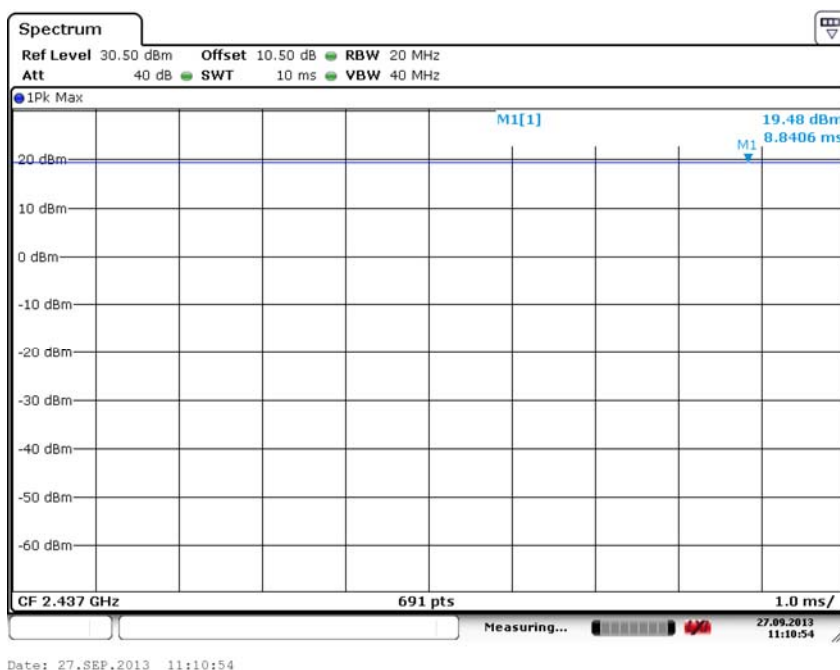


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11b

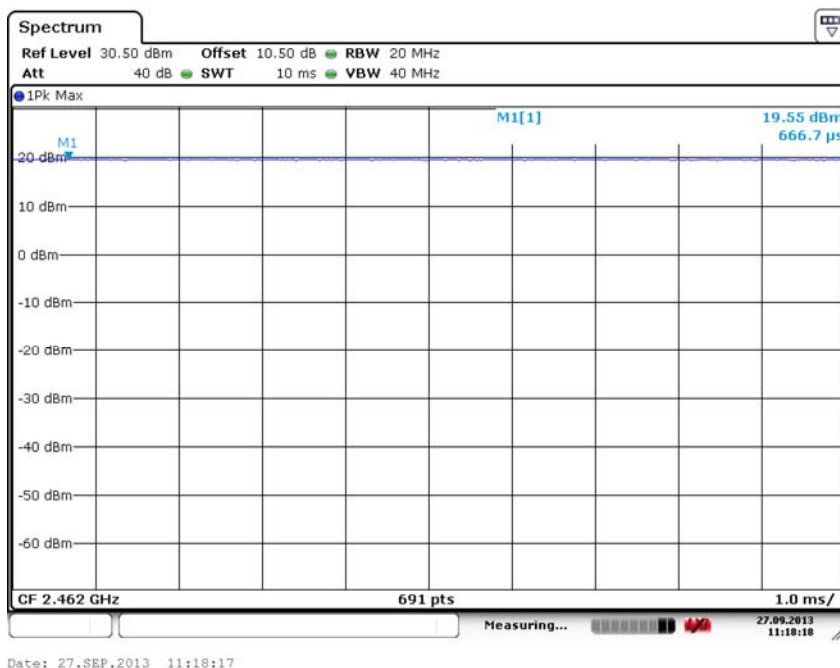


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b

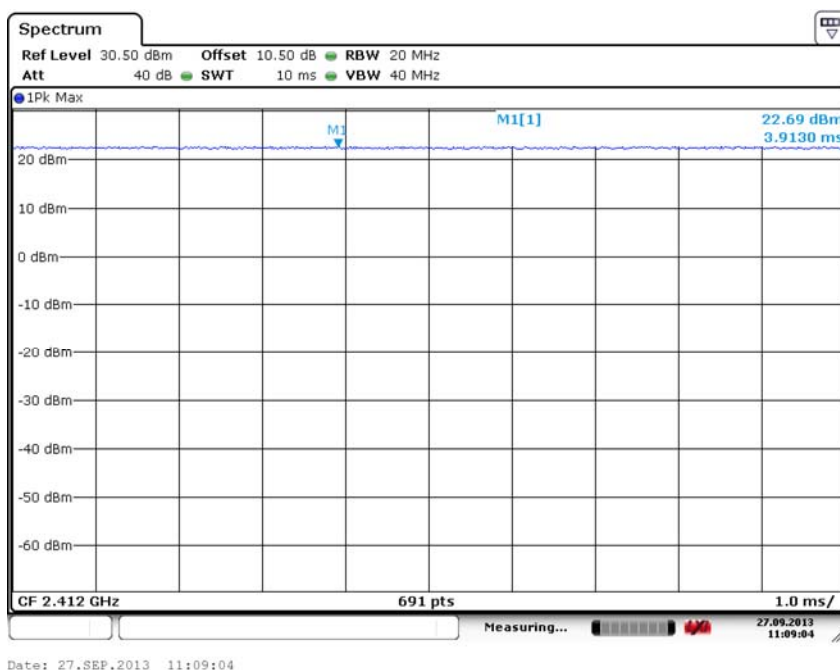


Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

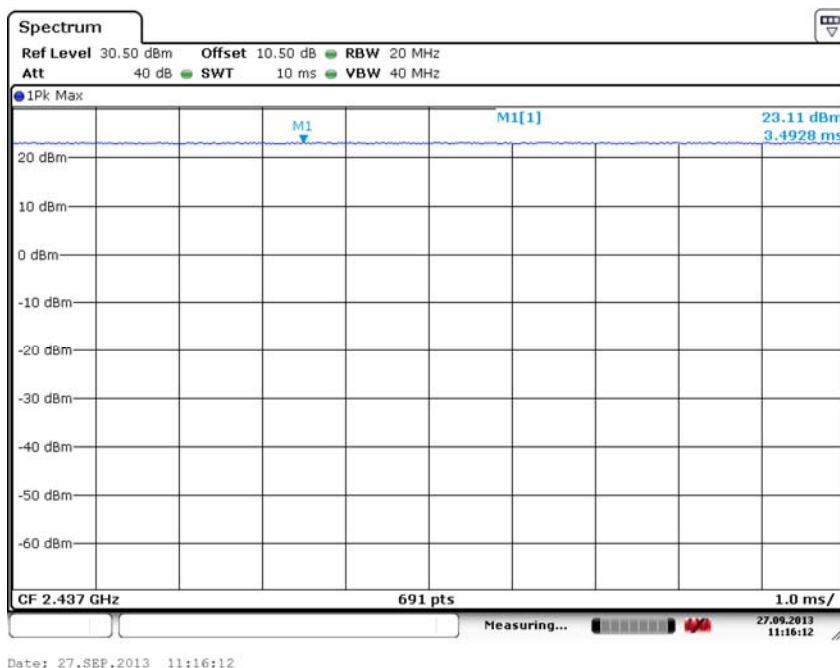


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

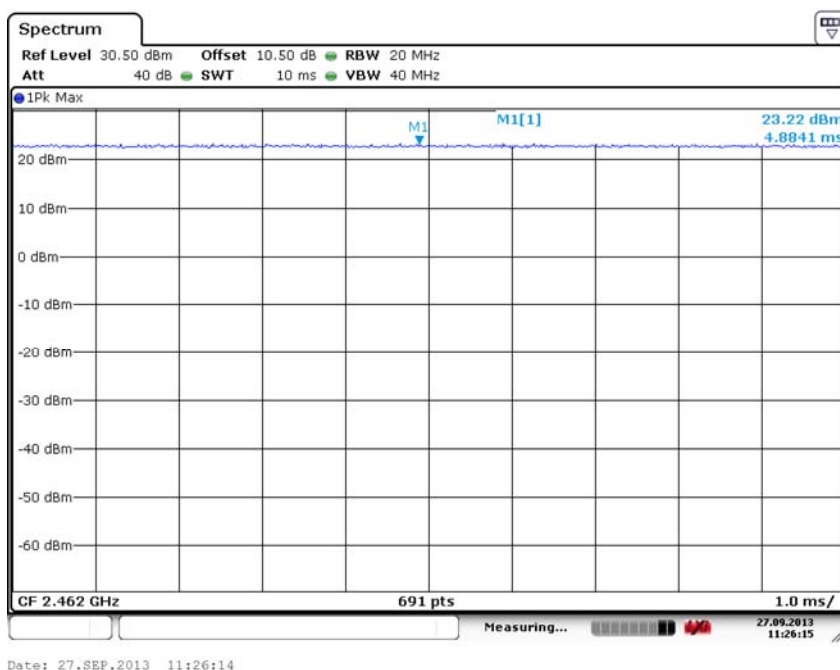


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g

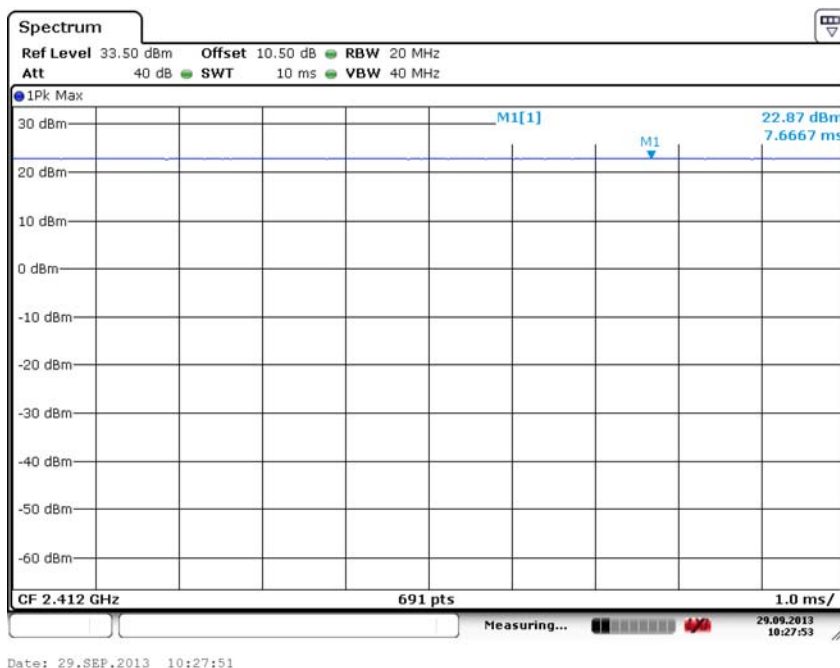


Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

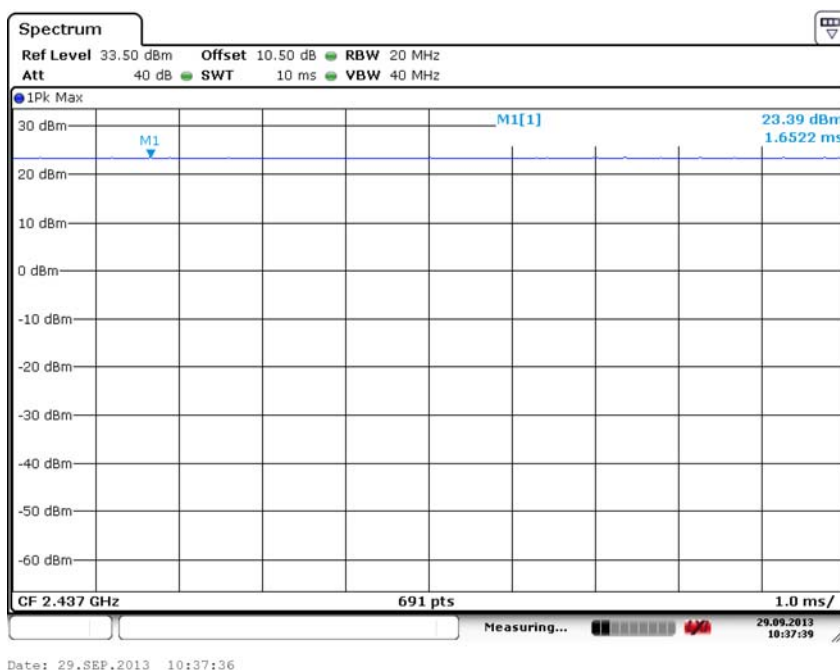


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT20)

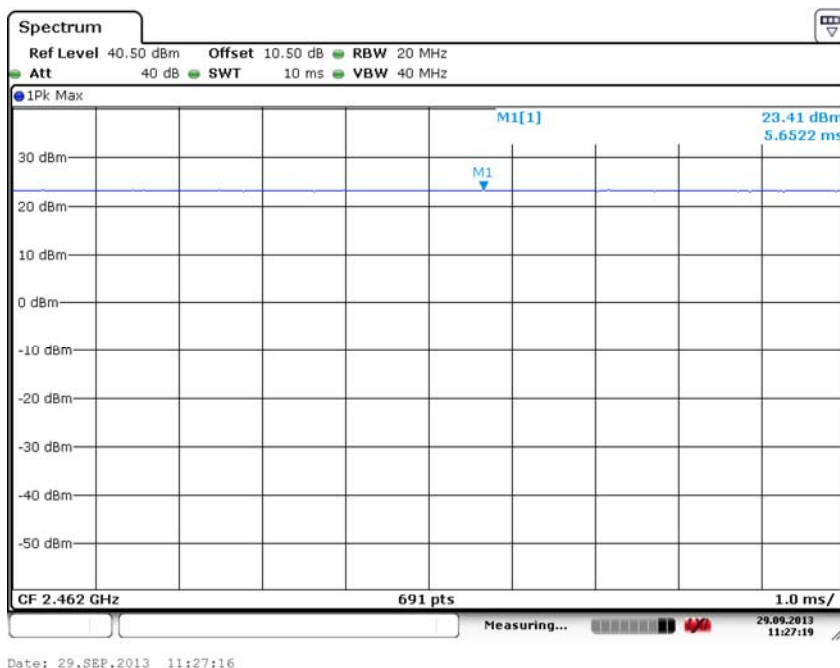


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)

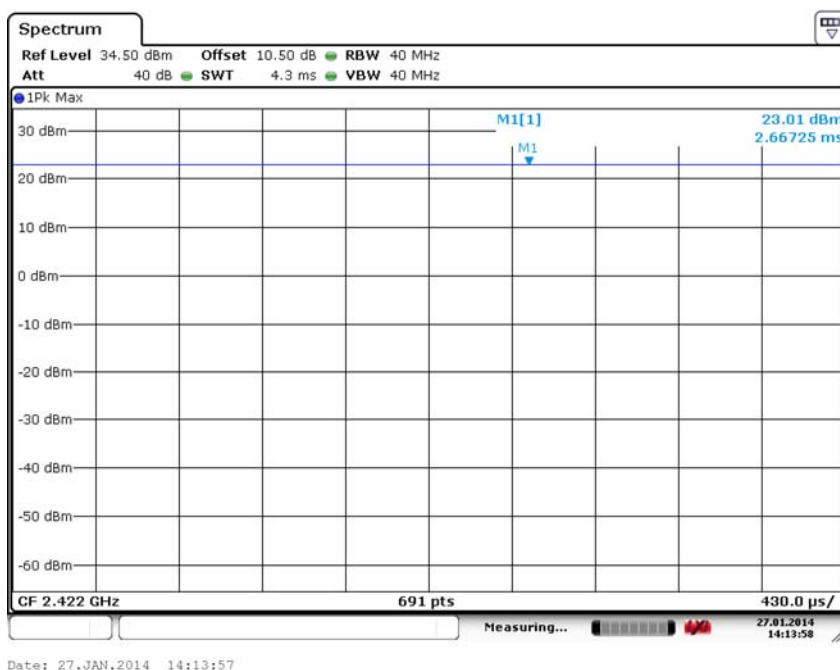

Carrier frequency (MHz): 2412
Channel No.:3
Test Mode: 802.11n(HT40)

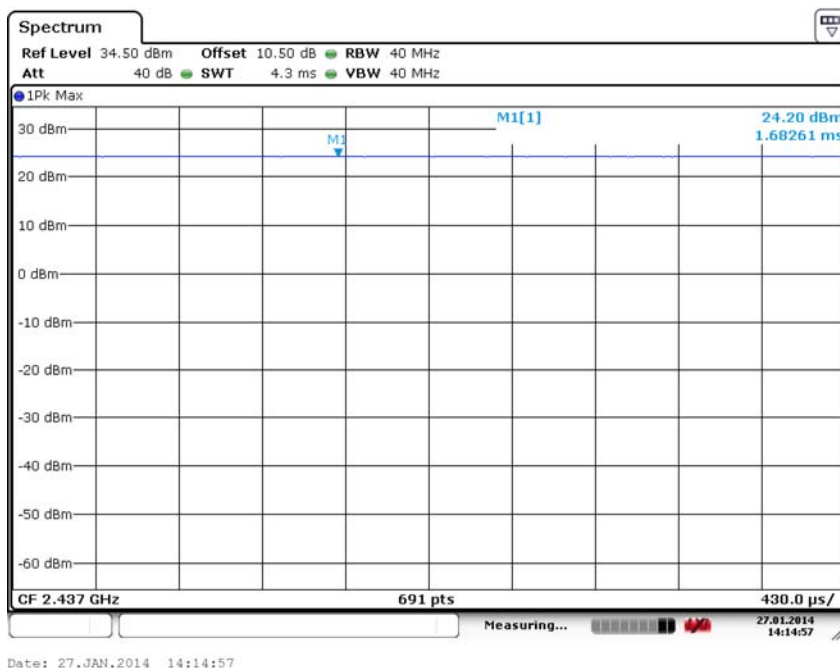

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT40)

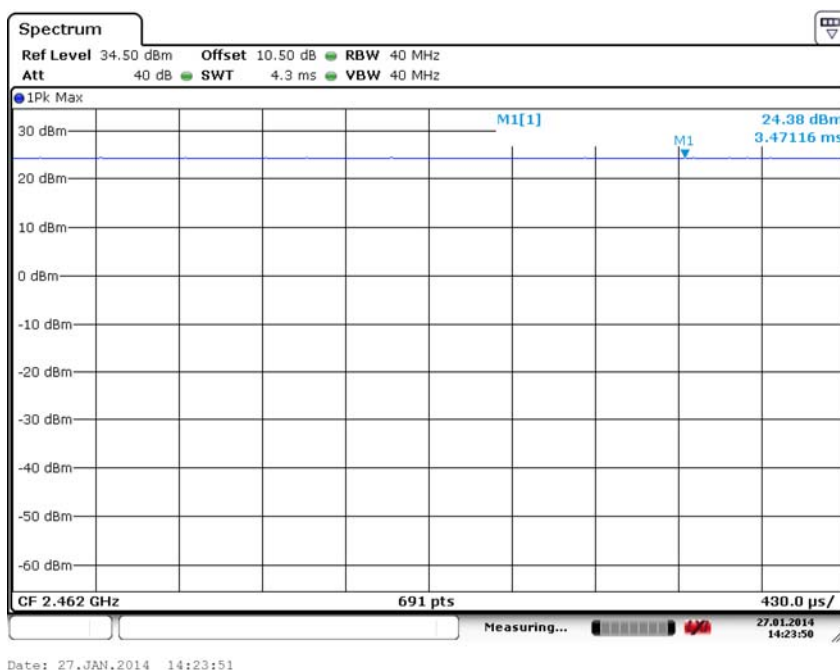

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT40)

2.2.2 Occupied Bandwidth

2.2.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.2.2 Test Description


The measurement is made according to KDB 558074 D01 DTS Meas Guidance v03r01 Section 8.1.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

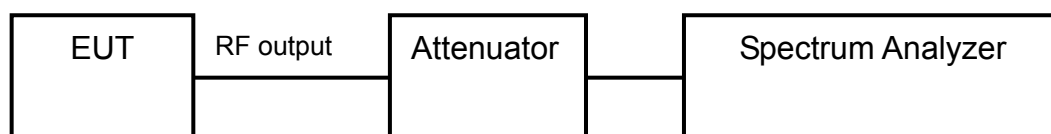

2.2.2.3 Test limit


FCC Part15.247(a)(2)

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

2.2.2.4 Test result

Test Mode: 802.11b

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	10.13
2437	6	10.13
2462	11	10.13

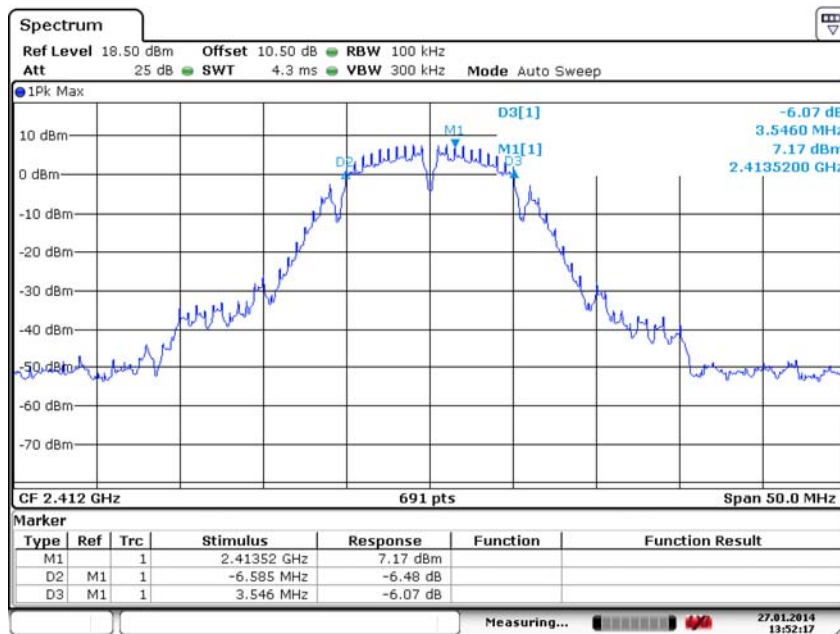


Date: 27.JAN.2014 13:52:18

Carrier frequency (MHz): 2412


Channel No.:1

Test Mode: 802.11b

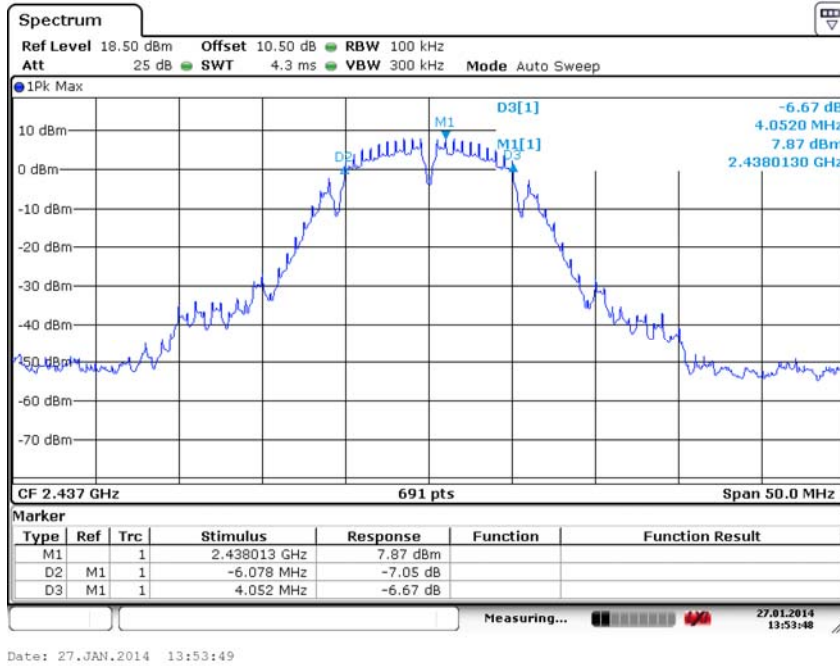

Date: 27.JAN.2014 13:53:49

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11b

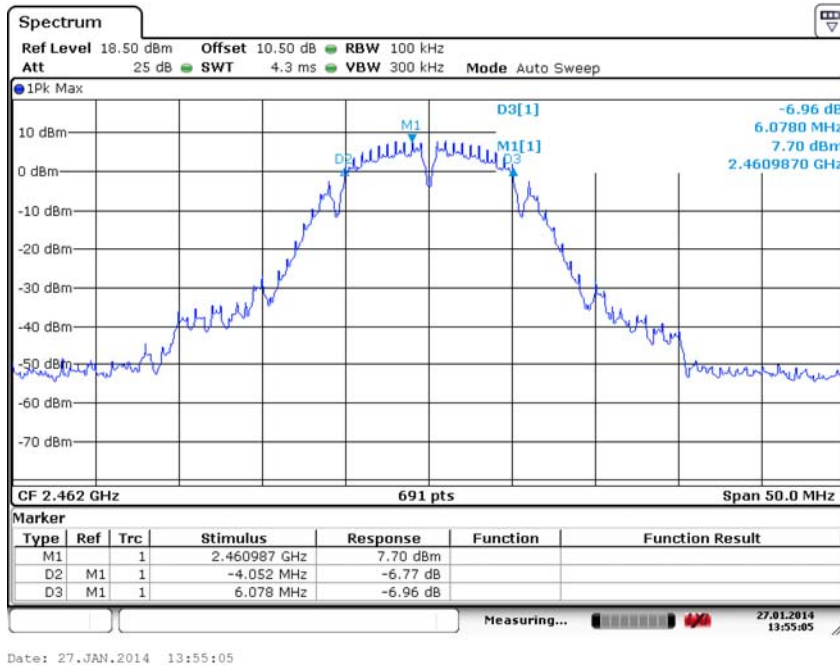


Date: 27.JAN.2014 13:55:05

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.50
2437	6	15.92
2462	11	16.43

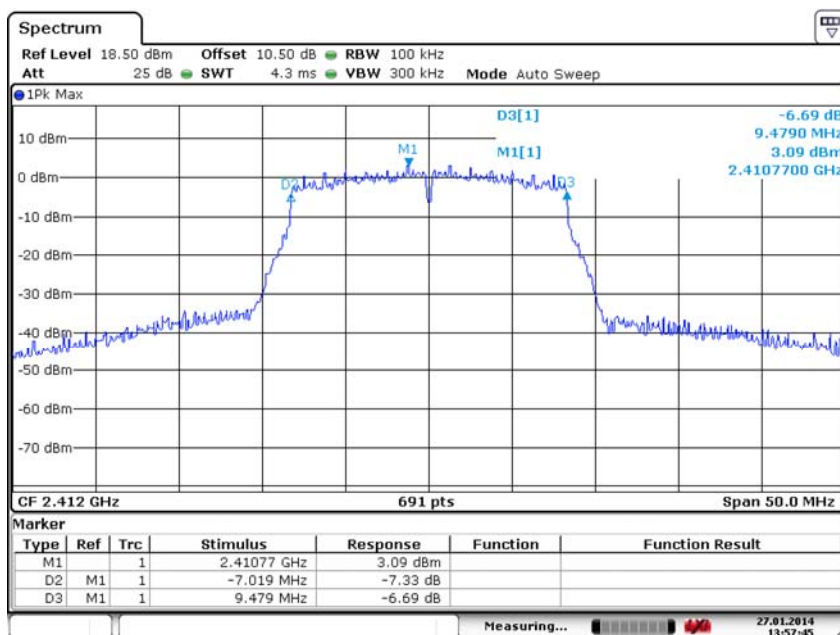


Date: 27.JAN.2014 13:57:45

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

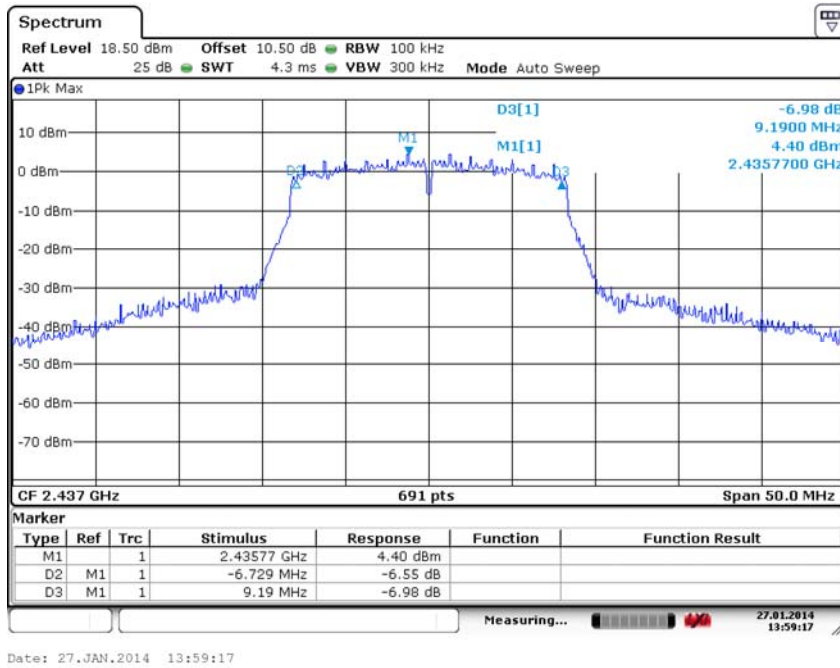


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

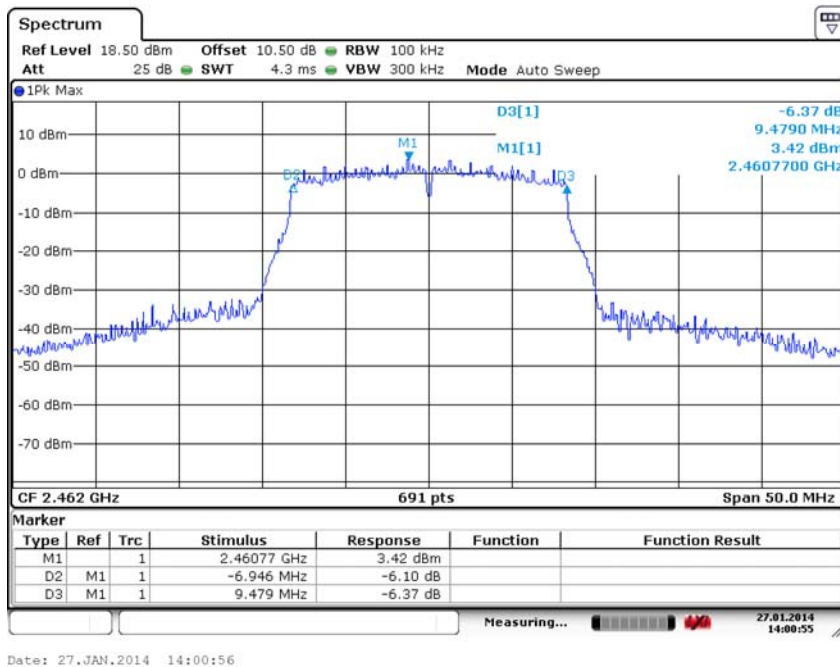

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g


Test Mode: 802.11n(HT20)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.93
2437	6	15.20
2462	11	16.43

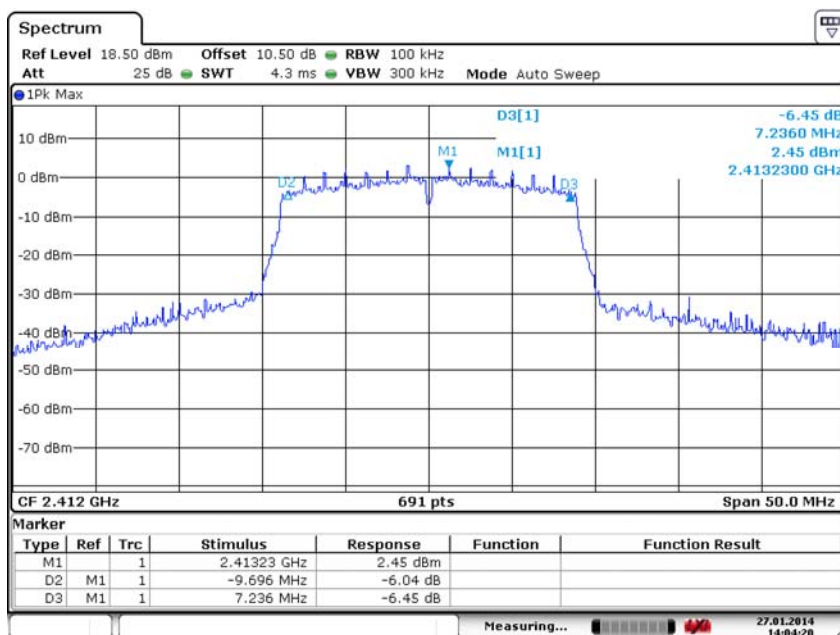


Date: 27.JAN.2014 14:04:21

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

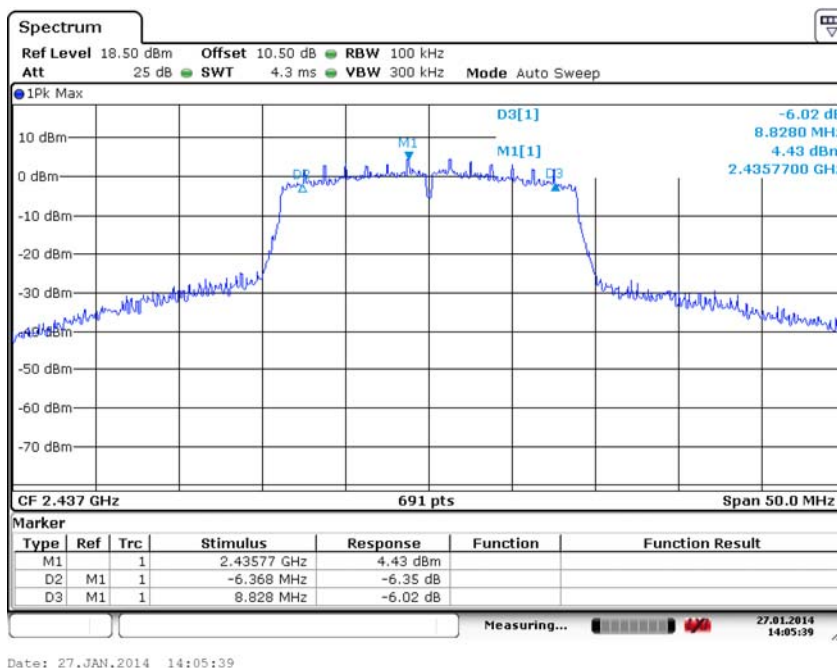

Date: 27, JAN, 2014 14:05:39

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT20)

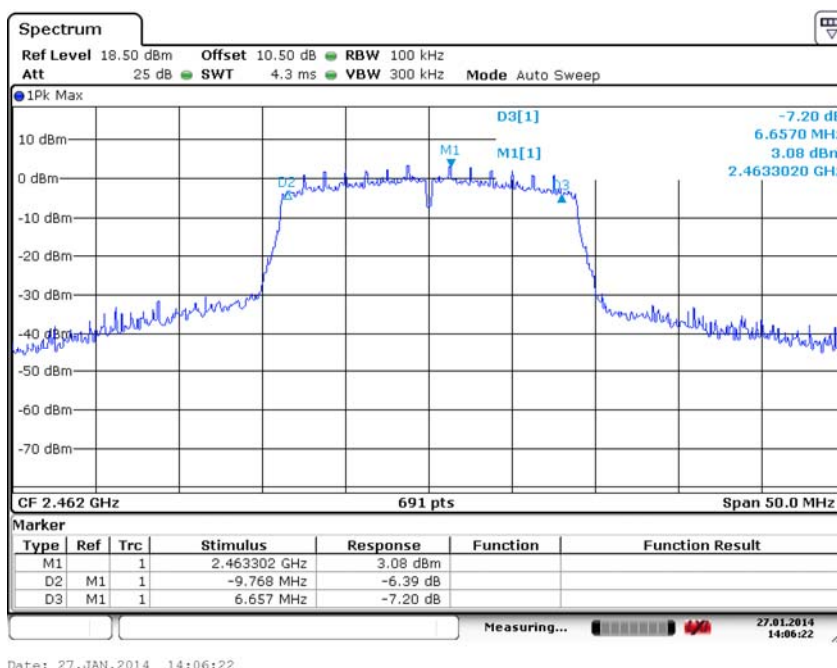


Date: 27, JAN, 2014 14:06:22

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)


Test Mode: 802.11n(HT40)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	35.31
2437	6	35.32
2462	11	35.32

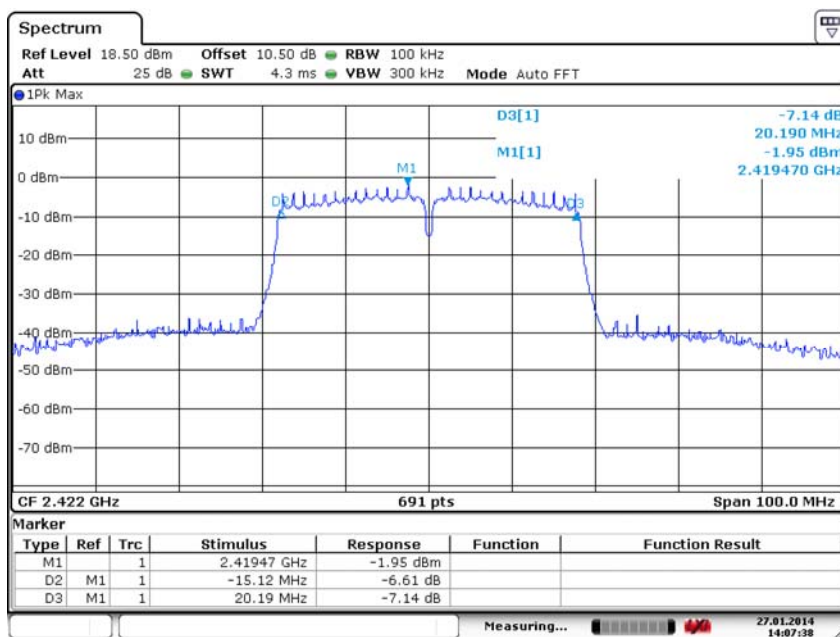


Date: 27.JAN.2014 14:07:38

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)

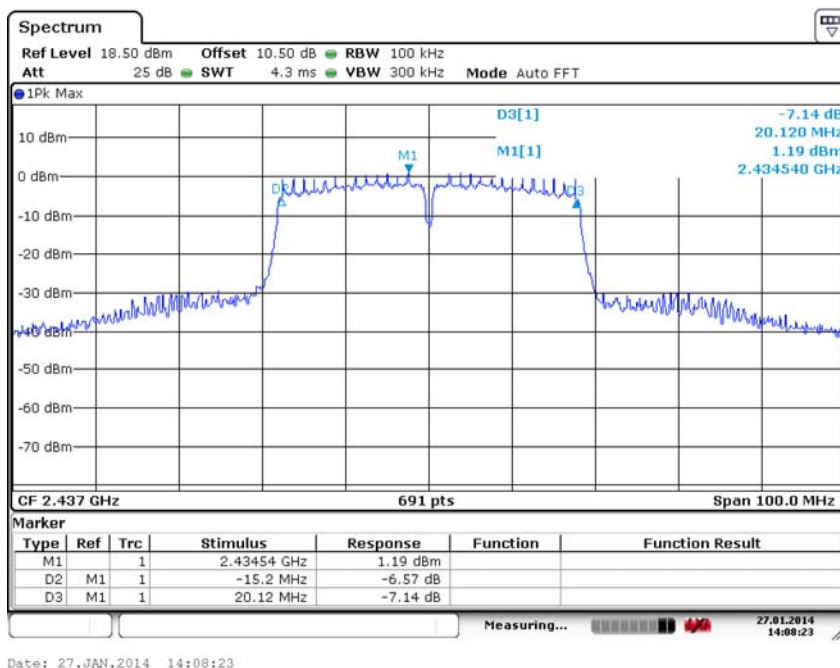

Date: 27, JAN, 2014 14:08:23

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT40)

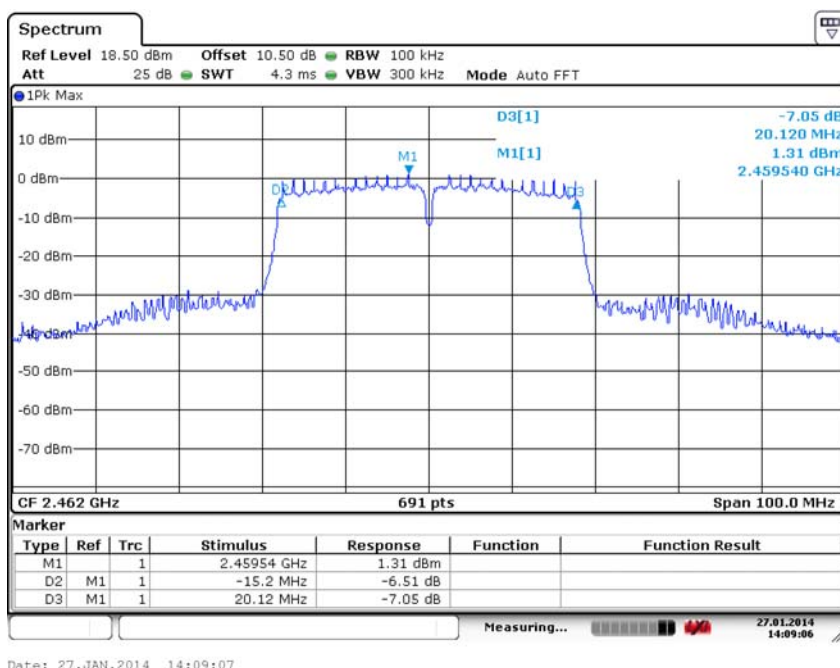

Date: 27, JAN, 2014 14:09:07

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT40)

2.2.3 Transmitter Power Spectral Density

2.2.3.1 Ambient condition


Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.3.2 Test Description

The measurement is made according to KDB 558074 D01 DTS Meas Guidance v03r01 Section 10.2.

The EUT was connected to the spectrum analyzer and WiFi set via a attenuator with a known loss.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

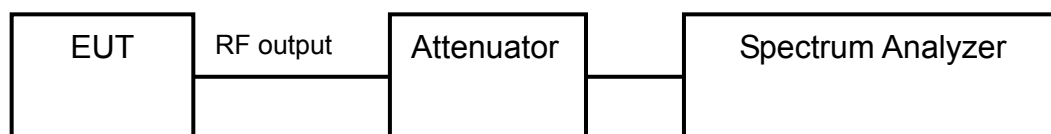

2.2.3.3 Test limit


FCC Par15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.2.3.4 Test result

Test Mode: 802.11b


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-6.39
2437	6	-6.42
2462	11	-6.65

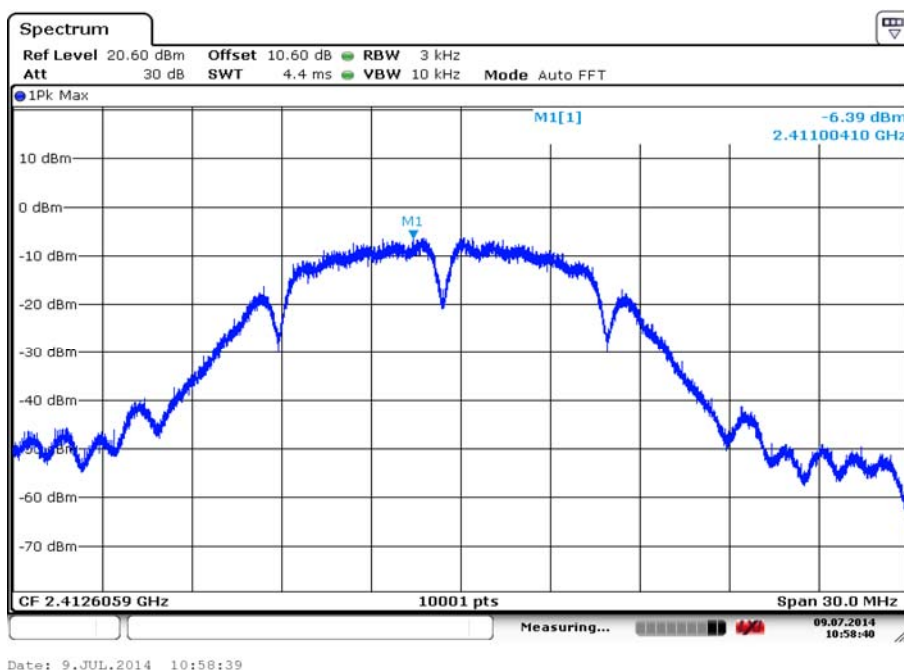

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11b

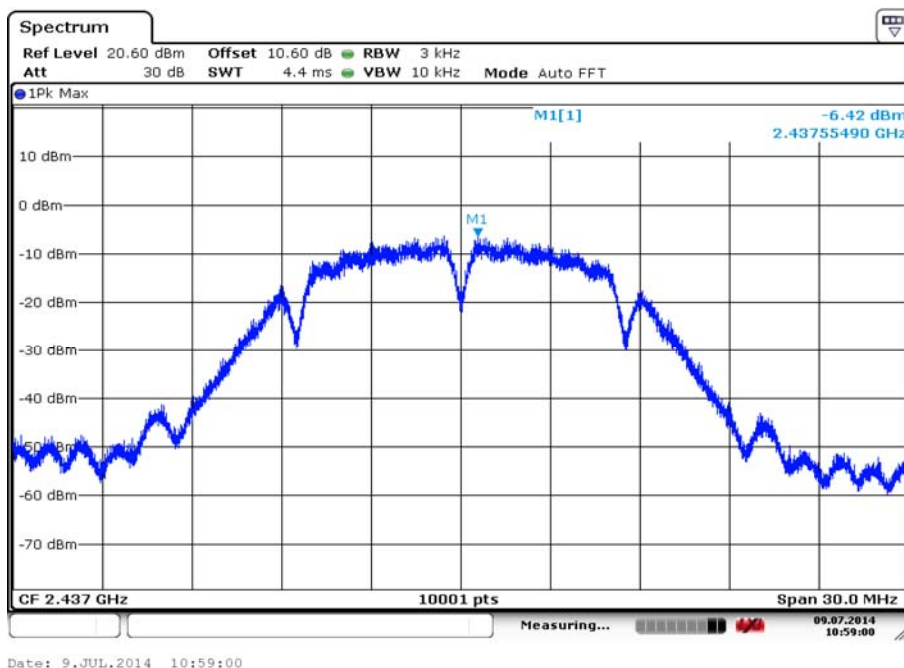


Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11b

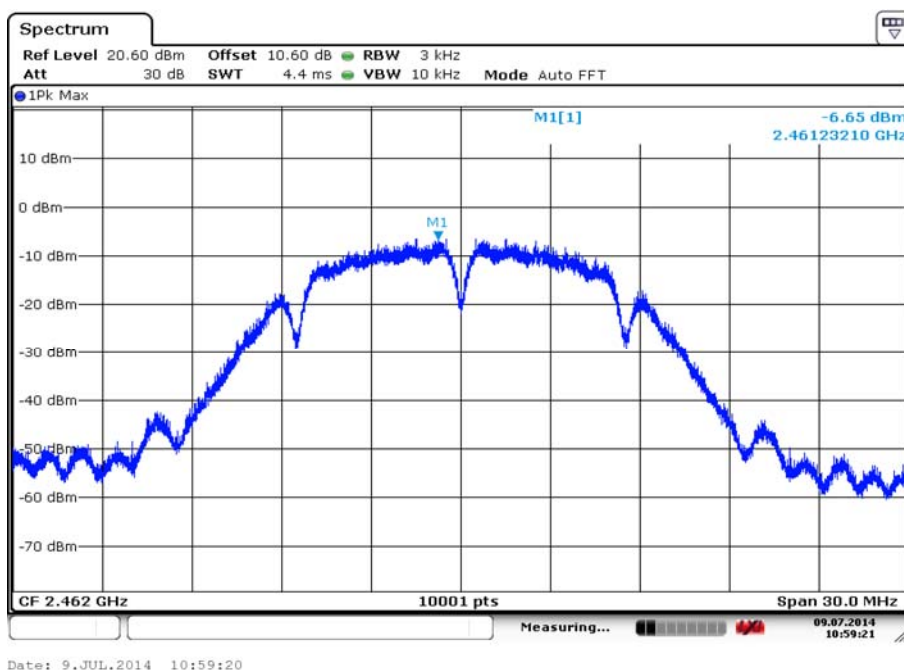


Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11b

Test Mode: 802.11g

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-9.93
2442	6	-8.68
2472	11	-8.45

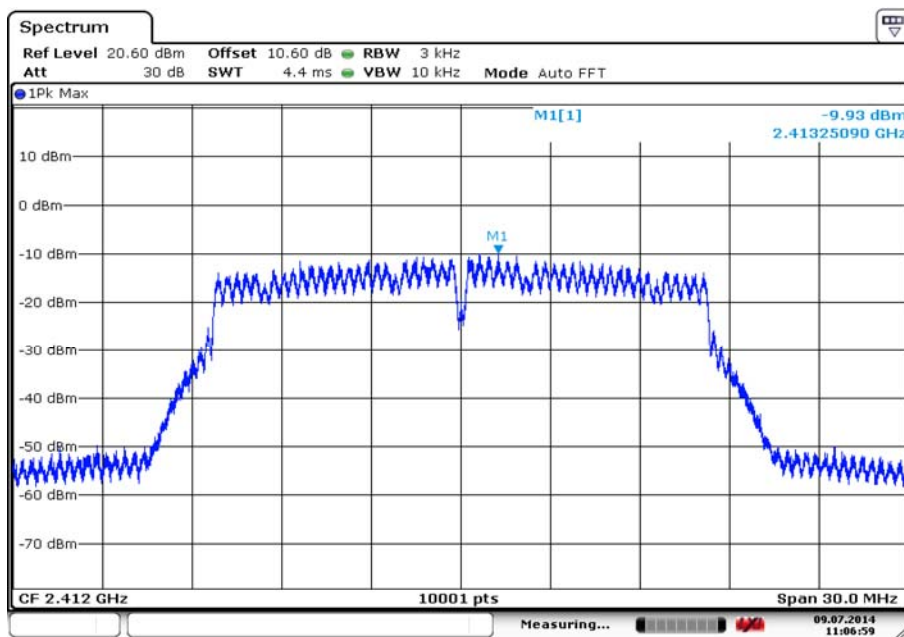


Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11g

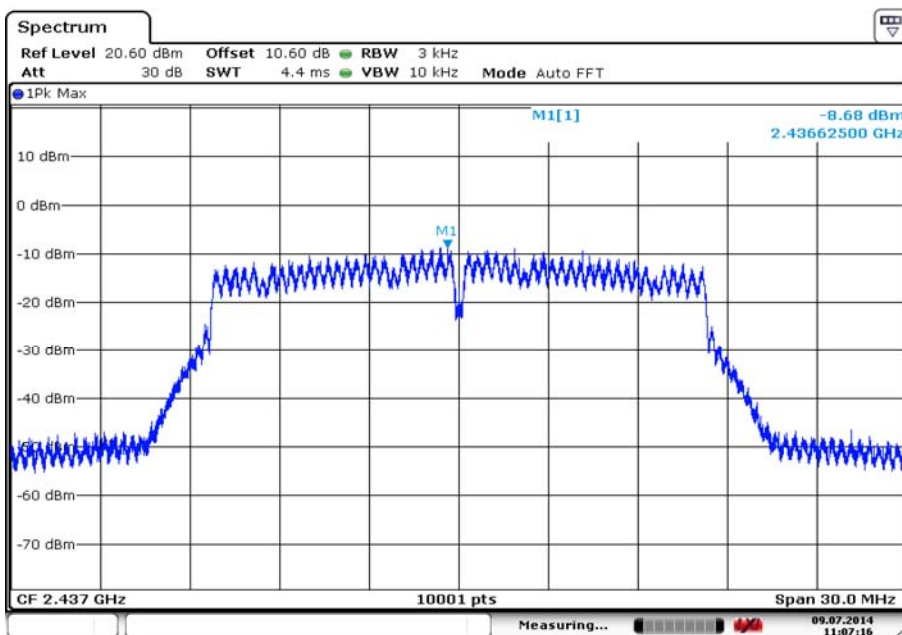

Date: 9.JUL.2014 11:07:15

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11g

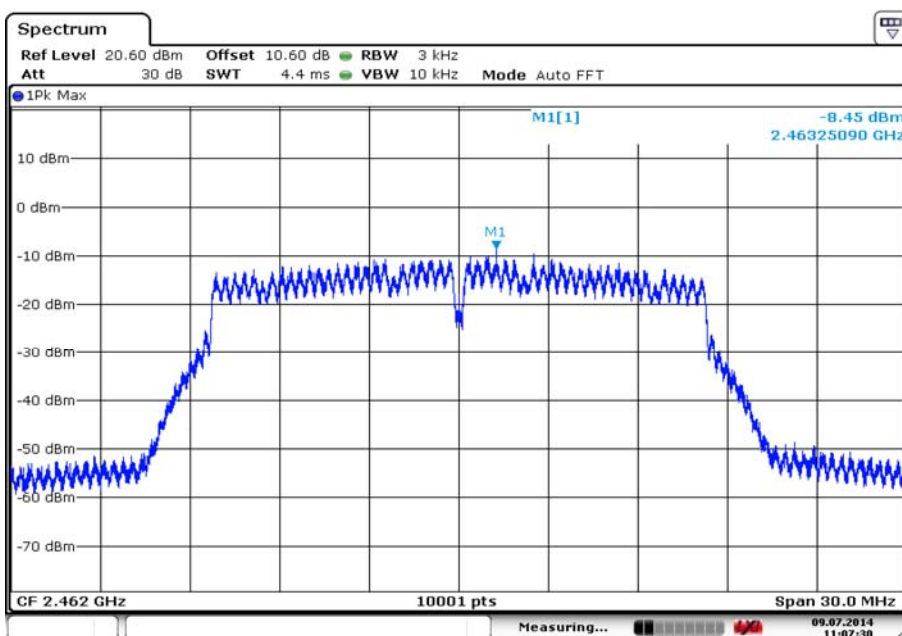


Date: 9.JUL.2014 11:07:29

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11g


Test Mode: 802.11n(HT20)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-10.75
2437	6	-9.98
2462	11	-9.55

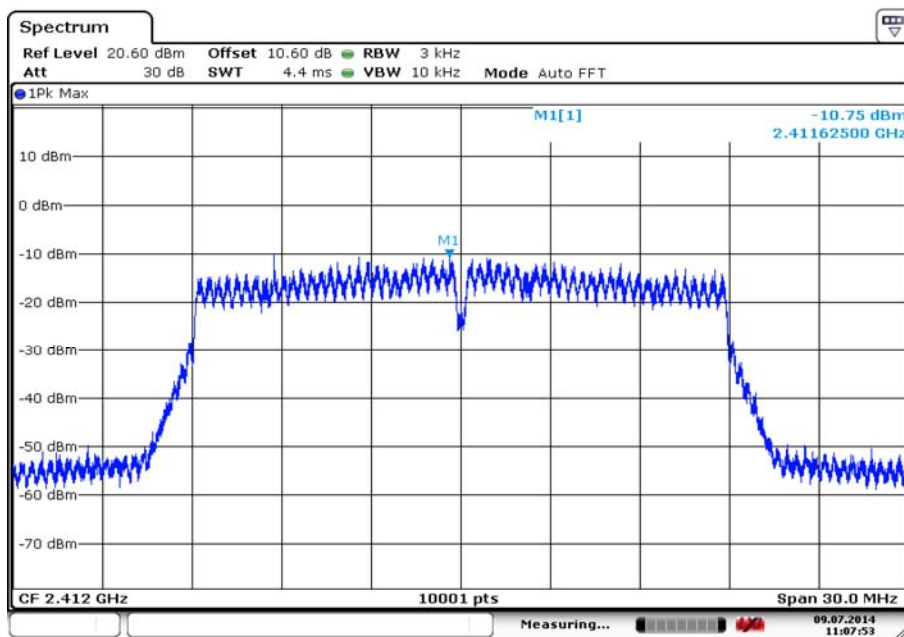


Date: 9.JUL.2014 11:07:52

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11n(HT20)

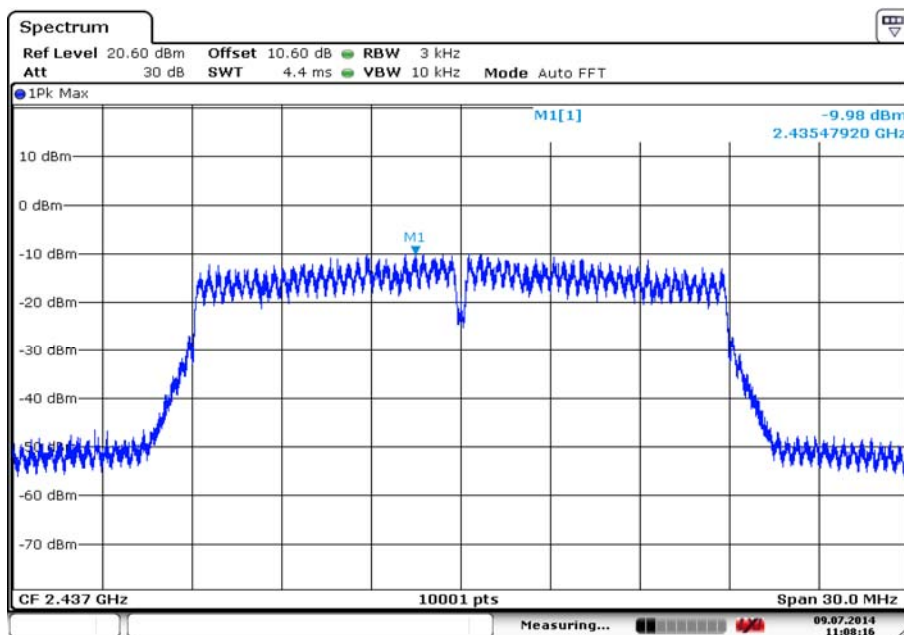

Date: 9.JUL.2014 11:08:15

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11n(HT20)

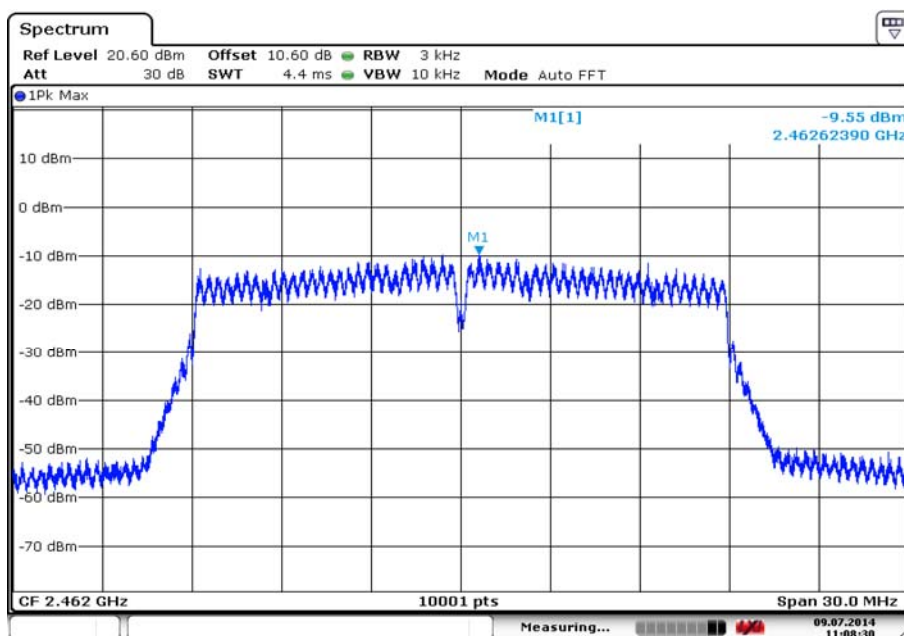


Date: 9.JUL.2014 11:08:29

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11n(HT20)


Test Mode: 802.11n(HT40)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-14.99
2437	6	-13.14
2462	11	-13.14

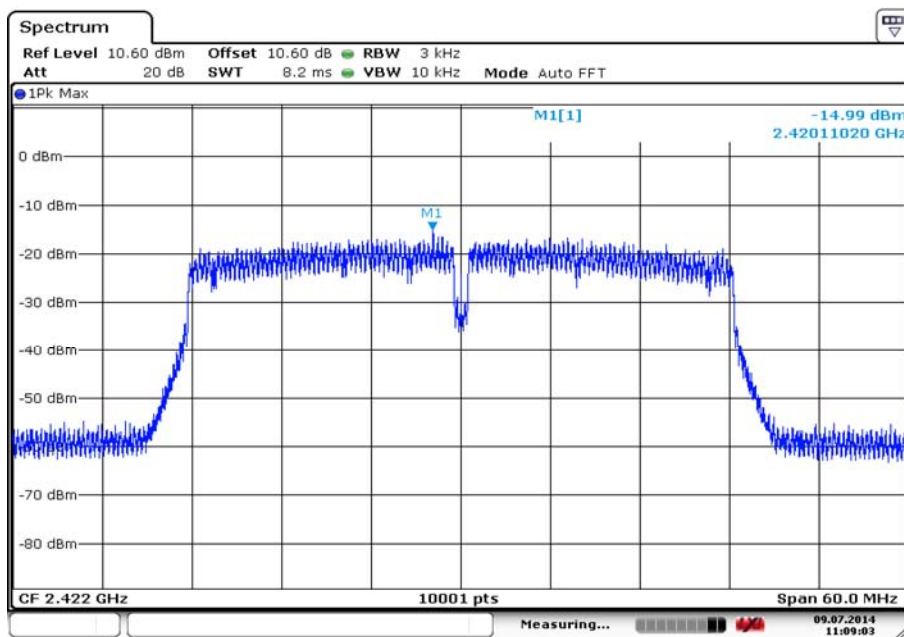


Date: 9.JUL.2014 11:09:03

Carrier frequency (MHz): 2422
 Channel No.3
 Test Mode: 802.11n(HT40)

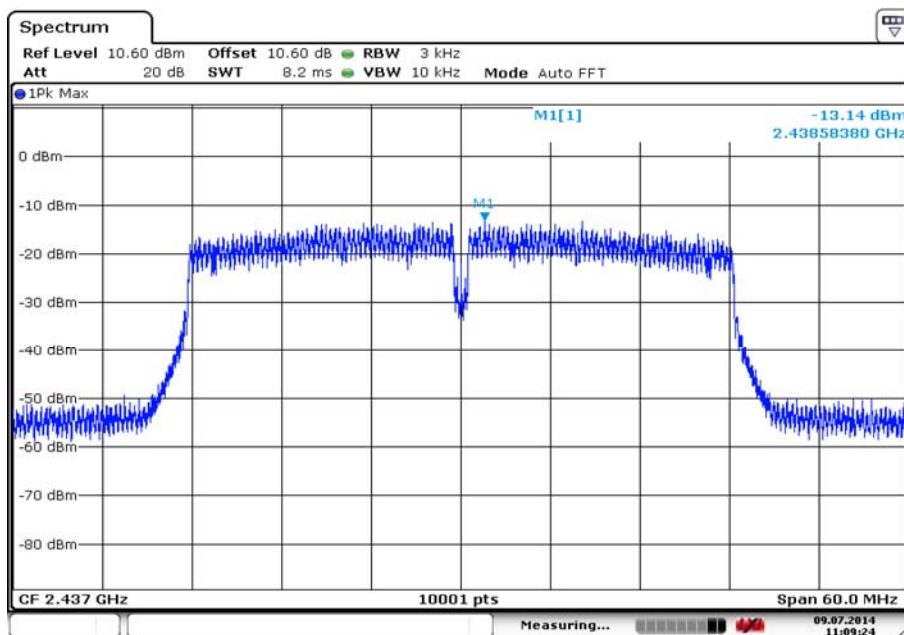

Date: 9.JUL.2014 11:09:23

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11n(HT40)

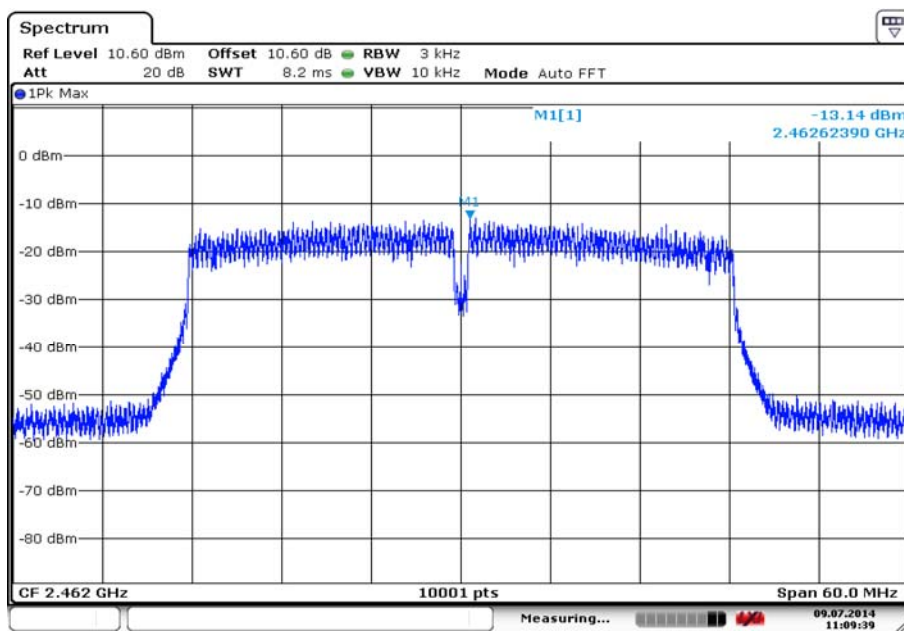

Date: 9.JUL.2014 11:09:38

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11n(HT40)

2.2.4 Spurious RF Conducted Emissions

2.2.4.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.4.2 Test Description


The measurement is made according to KDB 558074 D01 DTS Meas Guidance v03r01 Section 11.3.

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to the spectrum analyzer and WiFi set via a attenuator with a known loss.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 1 MHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Ensure that the number of measurement points \geq span/RBW
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 4.5). This value is used to calculate the 20 dBc limit.

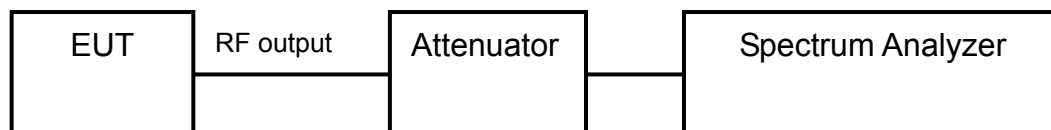

2.2.4.3 Test limit

FCC Part15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

2.2.4.4 Test result

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.70	7.59	-12.41
1GHz~12.75GHz	-44.38	7.59	-12.41
12.75GHz~25GHz	-53.71	7.59	-12.41

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11b

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.39	8.11	-11.89
1GHz~12.75GHz	-42.74	8.11	-11.89
12.75GHz~25GHz	-53.36	8.11	-11.89


Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11b

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-61.70	7.94	-12.06
1GHz~12.75GHz	-42.48	7.94	-12.06
12.75GHz~25GHz	-53.91	7.94	-12.06


Note: The Reference value see 2.2.6 Band edge compliance

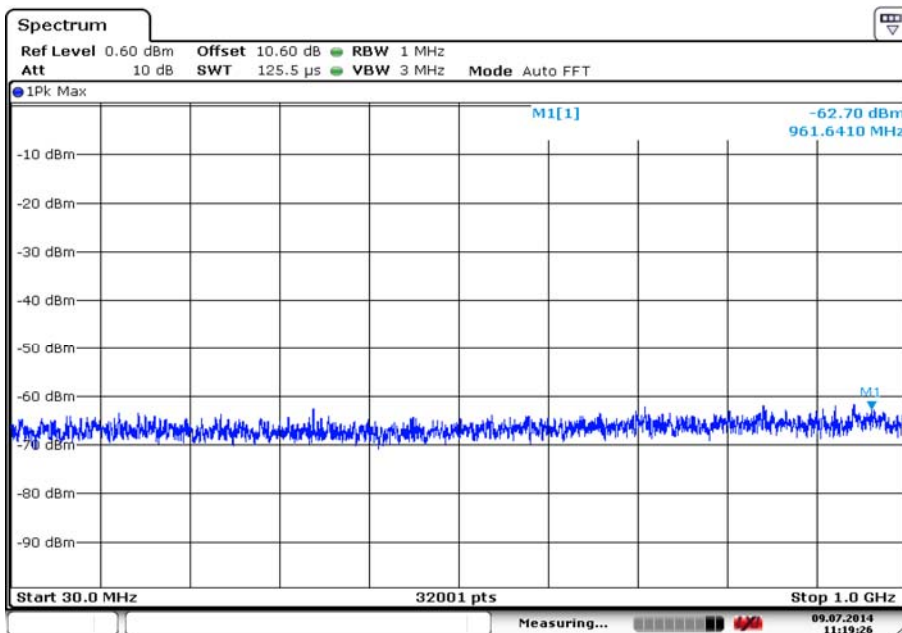


Date: 9.JUL.2014 11:19:26

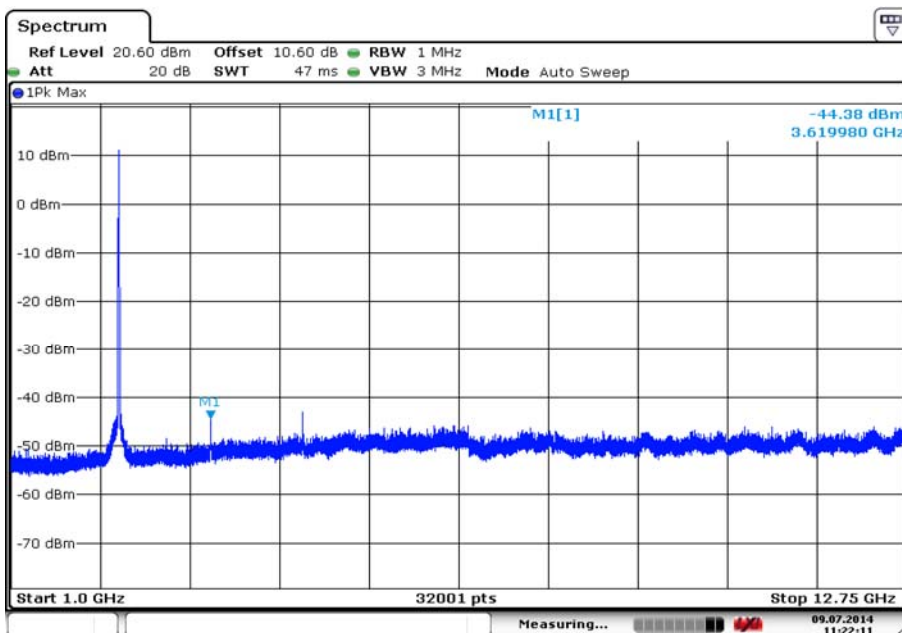


Date: 9.JUL.2014 11:22:11

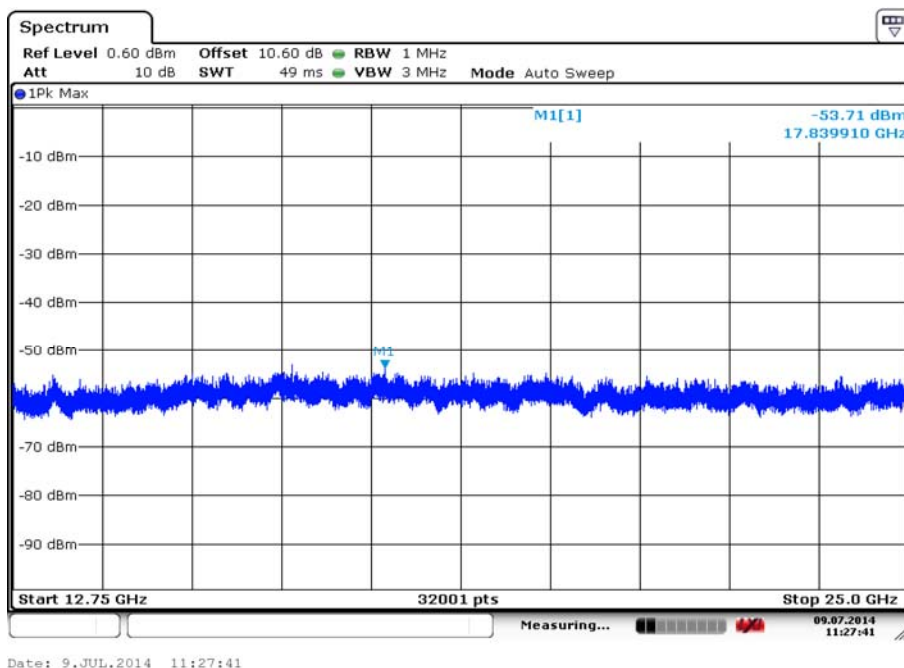


Carrier frequency (MHz): 2412
 Channel No.:1
 Test Mode: 802.11b

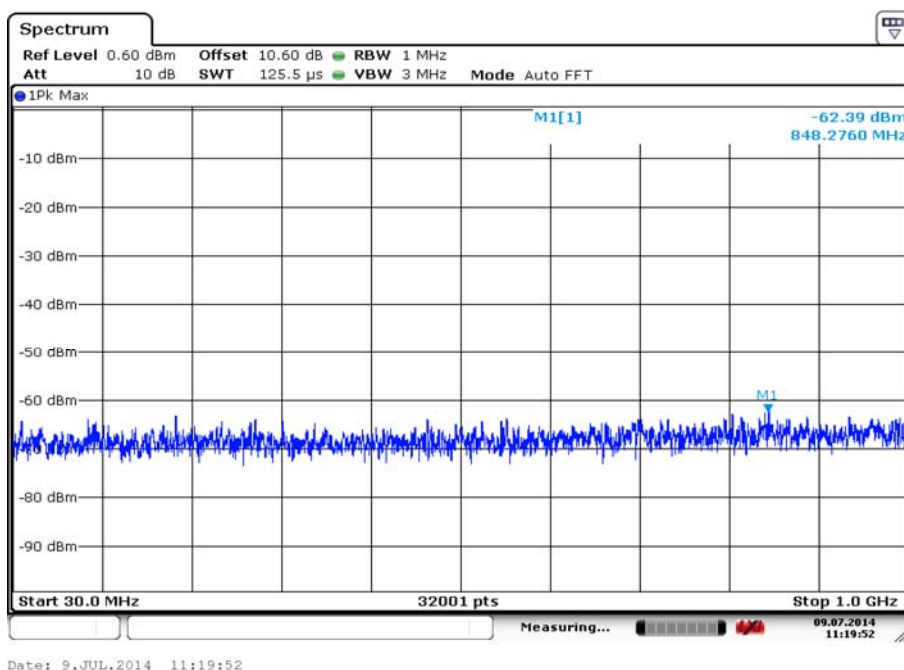


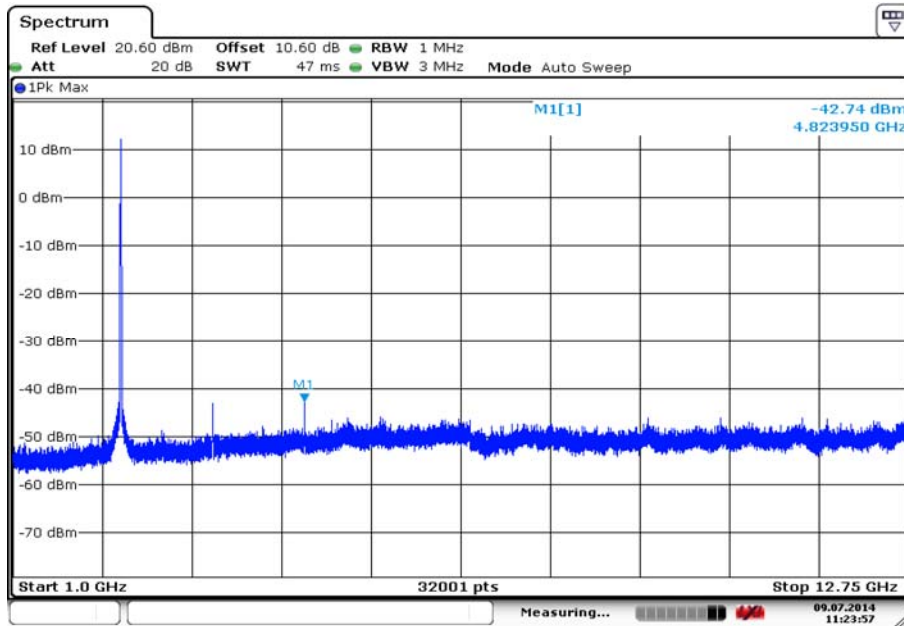



Date: 9.JUL.2014 11:23:56

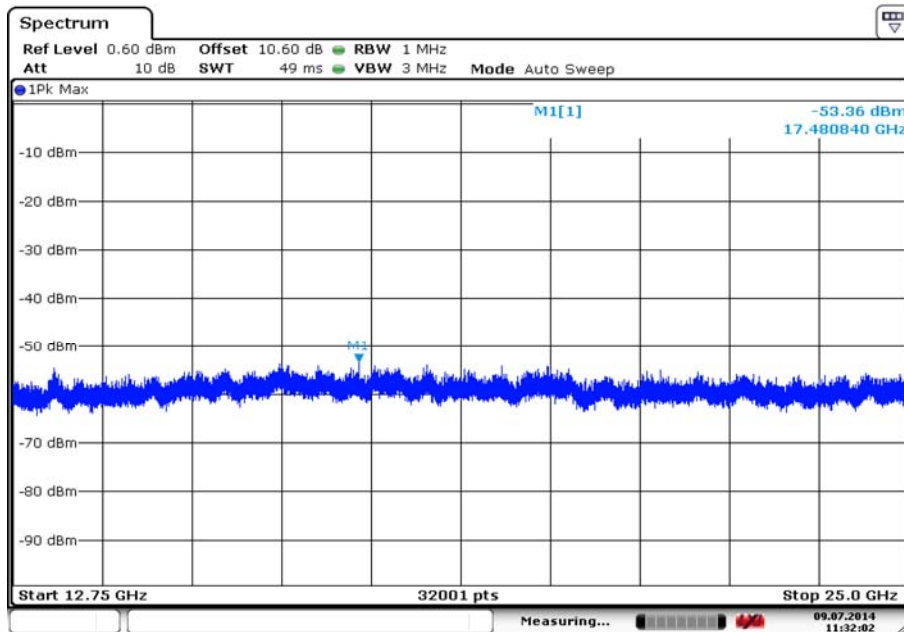

Date: 9.JUL.2014 11:32:02

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11b

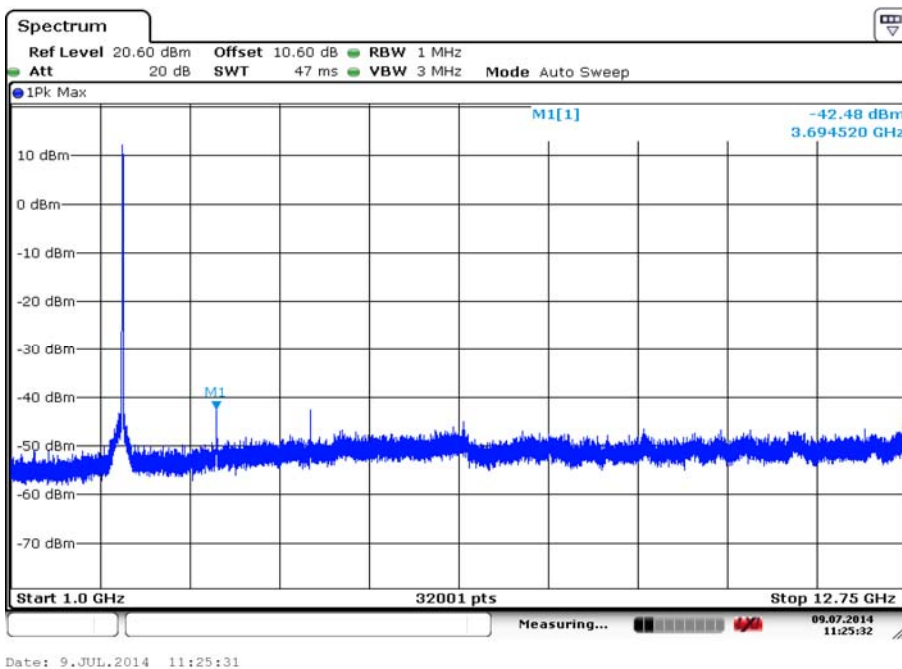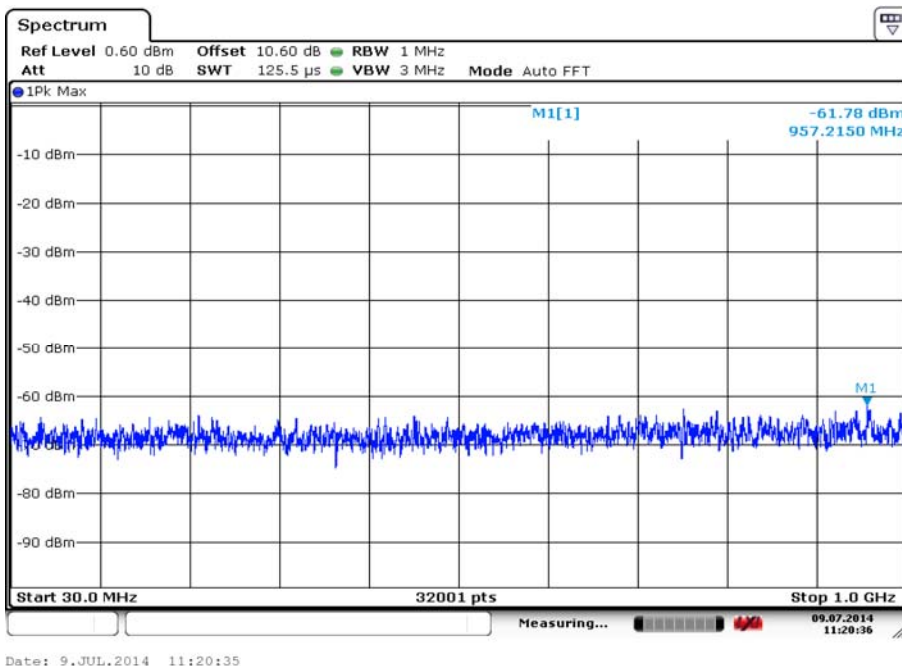

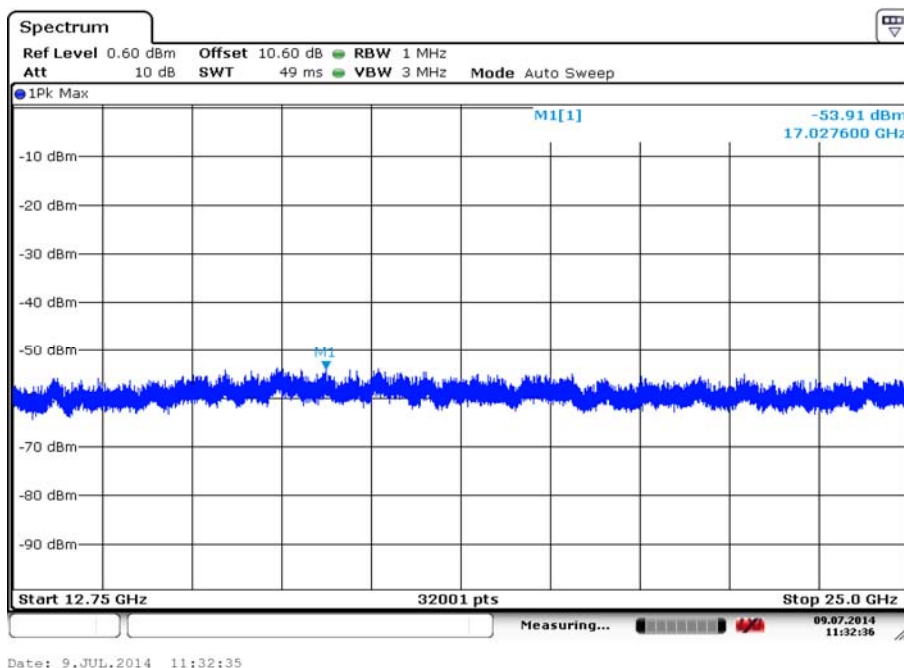

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-61.06	3.11	-16.89
1GHz~12.75GHz	-46.12	3.11	-16.89
12.75GHz~25GHz	-54.34	3.11	-16.89

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11g

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-61.88	4.56	-15.44
1GHz~12.75GHz	-46.71	4.56	-15.44
12.75GHz~25GHz	-53.43	4.56	-15.44



Carrier frequency (MHz): 2462


Channel No.:11

Test Mode: 802.11g


Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.16	7.94	-12.06
1GHz~12.75GHz	-46.68	7.94	-12.06
12.75GHz~25GHz	-53.00	7.94	-12.06



Note: The Reference value see 2.2.6 Band edge compliance

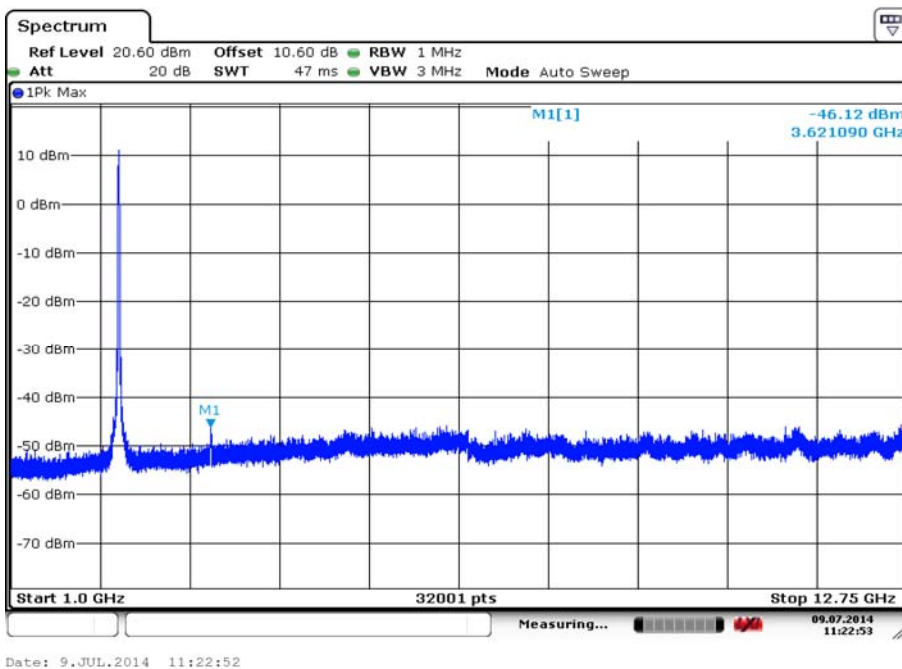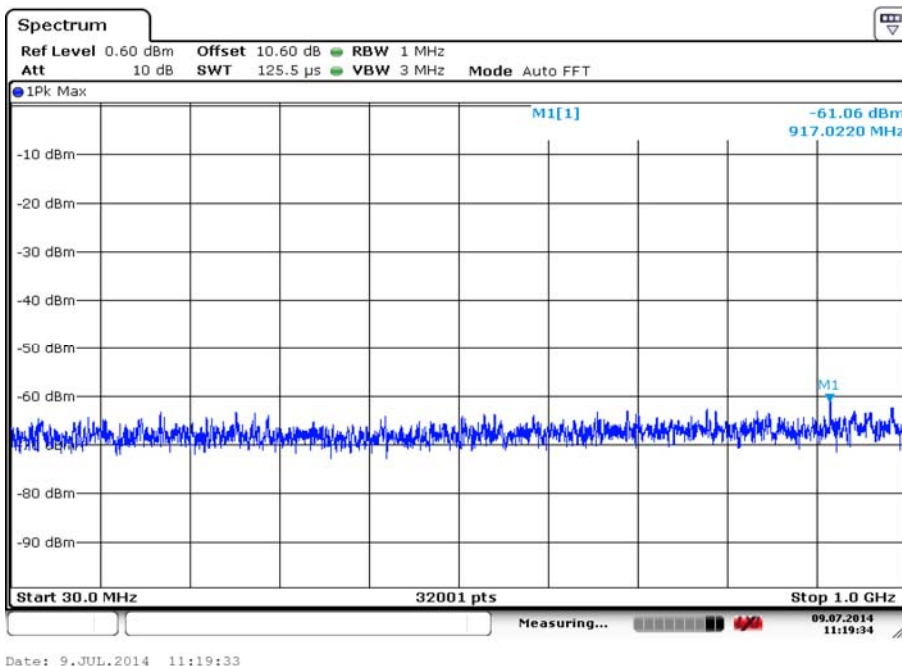

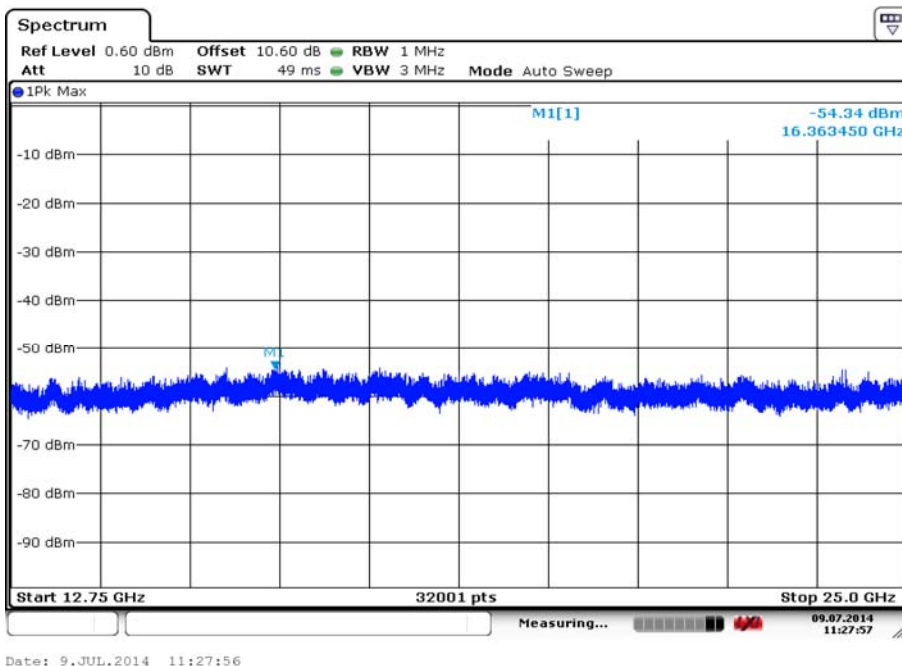


Carrier frequency (MHz): 2412
 Channel No.:1
 Test Mode: 802.11g

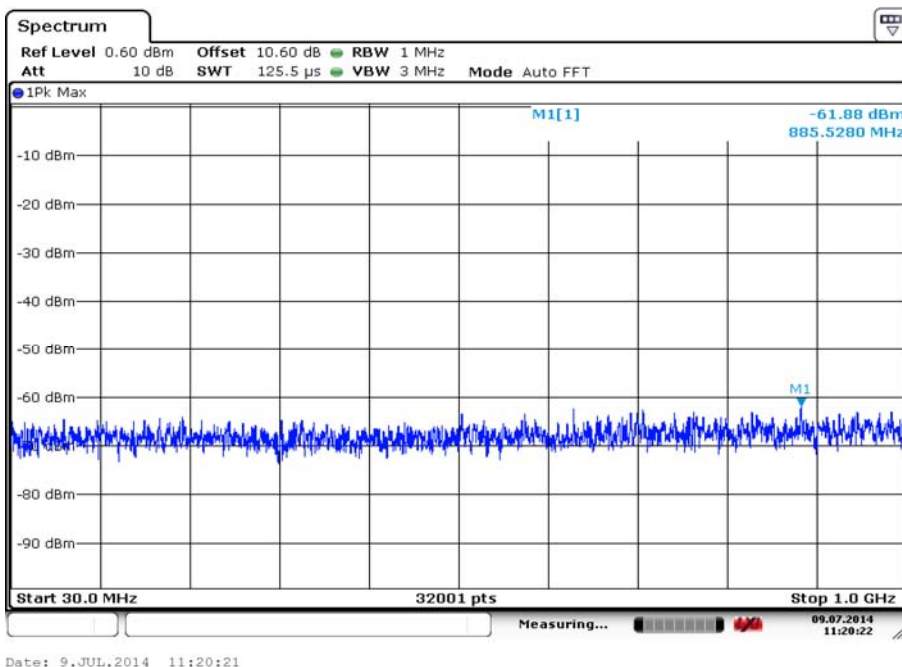


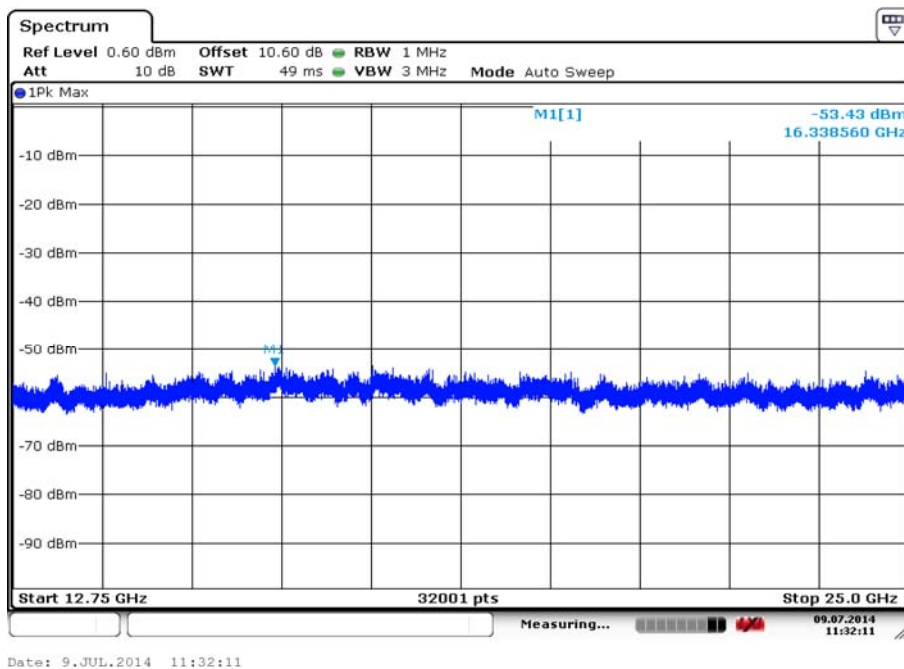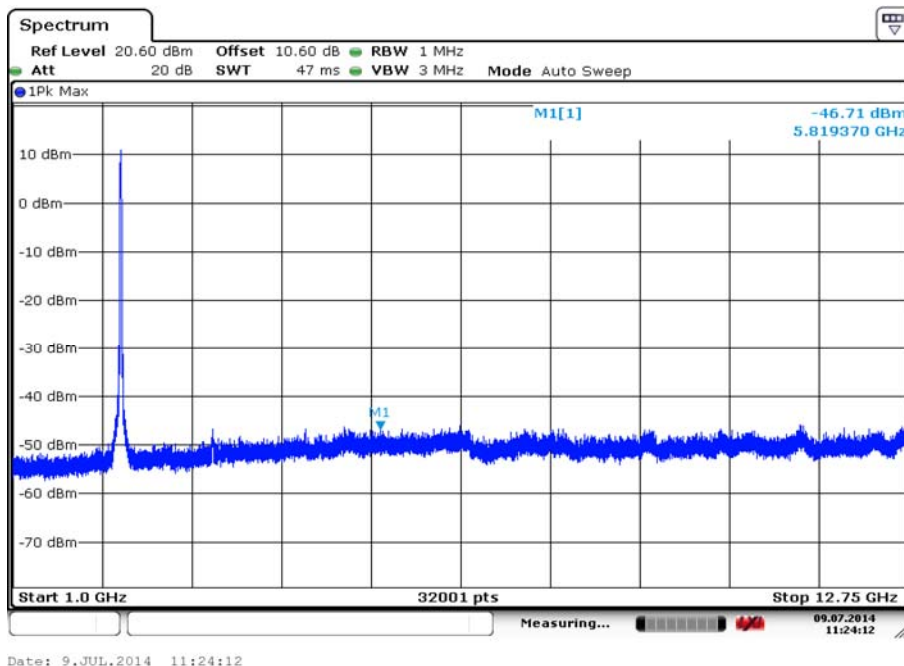


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

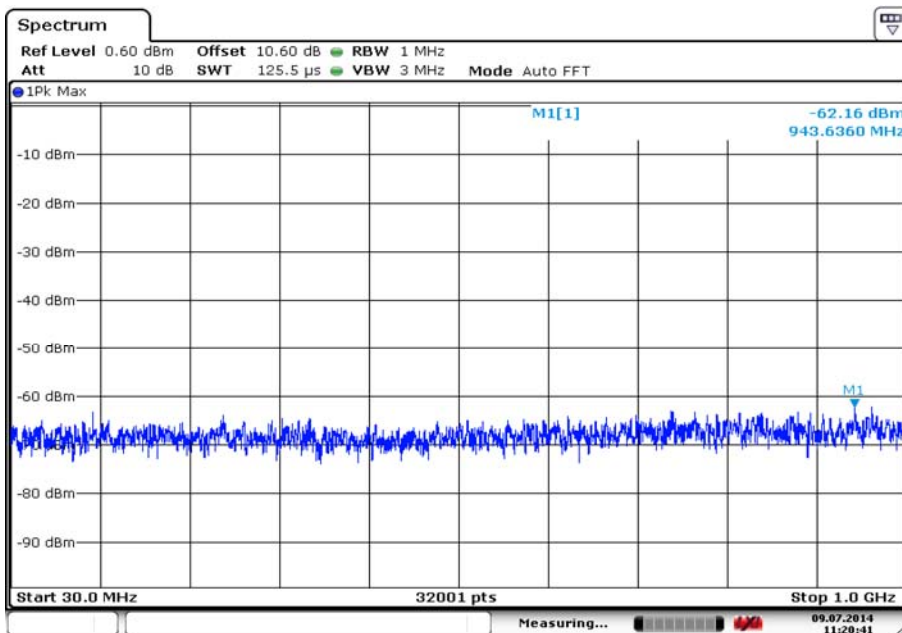

Date: 9.JUL.2014 11:20:40

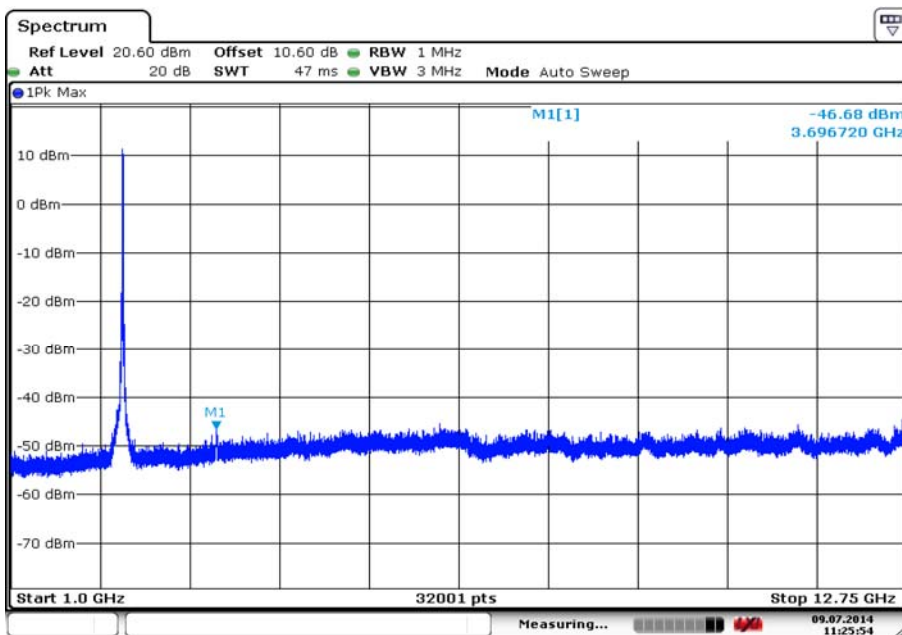

Date: 9.JUL.2014 11:25:54

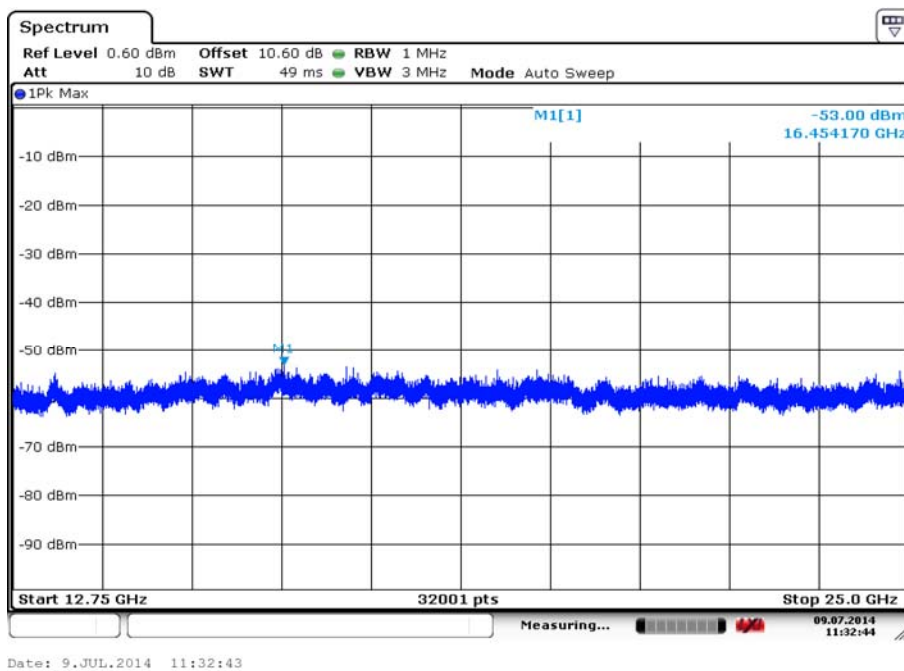

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.58	2.74	-17.26
1GHz~12.75GHz	-45.68	2.74	-17.26
12.75GHz~25GHz	-53.20	2.74	-17.26

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11n(HT20)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-63.88	4.42	-15.58
1GHz~12.75GHz	-46.26	4.42	-15.58
12.75GHz~25GHz	-53.73	4.42	-15.58


Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11n(HT20)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.26	3.62	-16.38
1GHz~12.75GHz	-45.37	3.62	-16.38
12.75GHz~25GHz	-53.73	3.62	-16.38


Note: The Reference value see 2.2.6 Band edge compliance

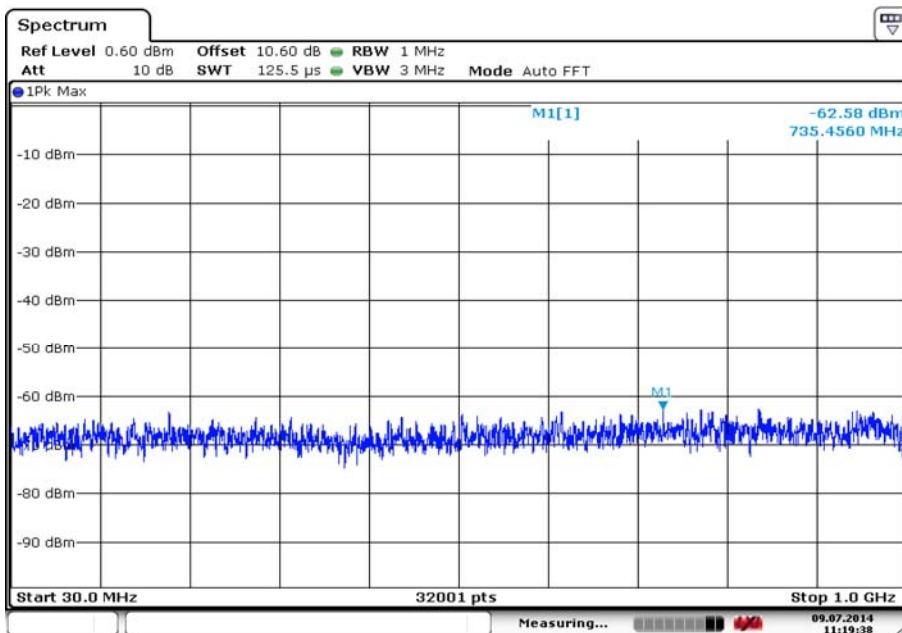


Date: 9.JUL.2014 11:19:38


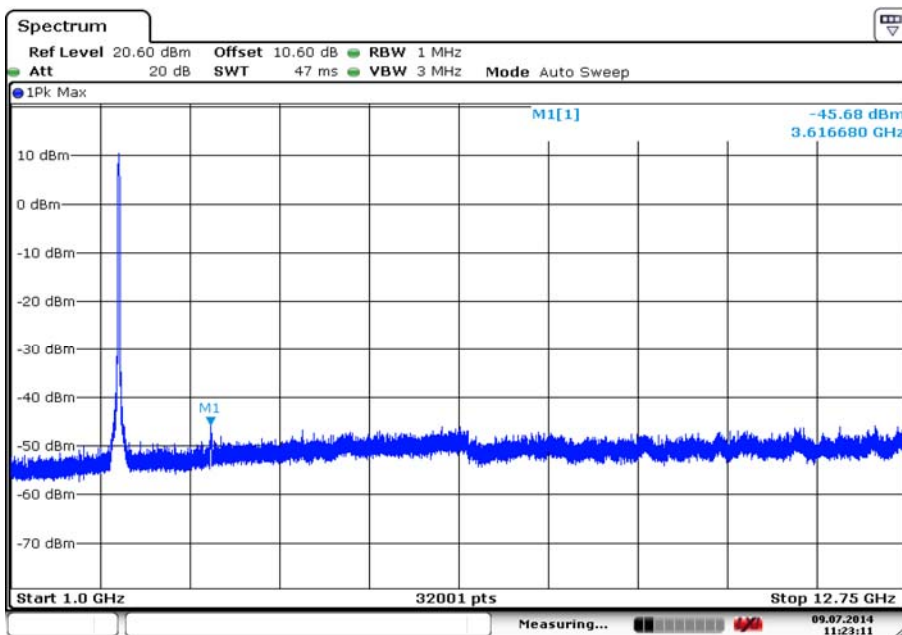


Date: 9.JUL.2014 11:23:10

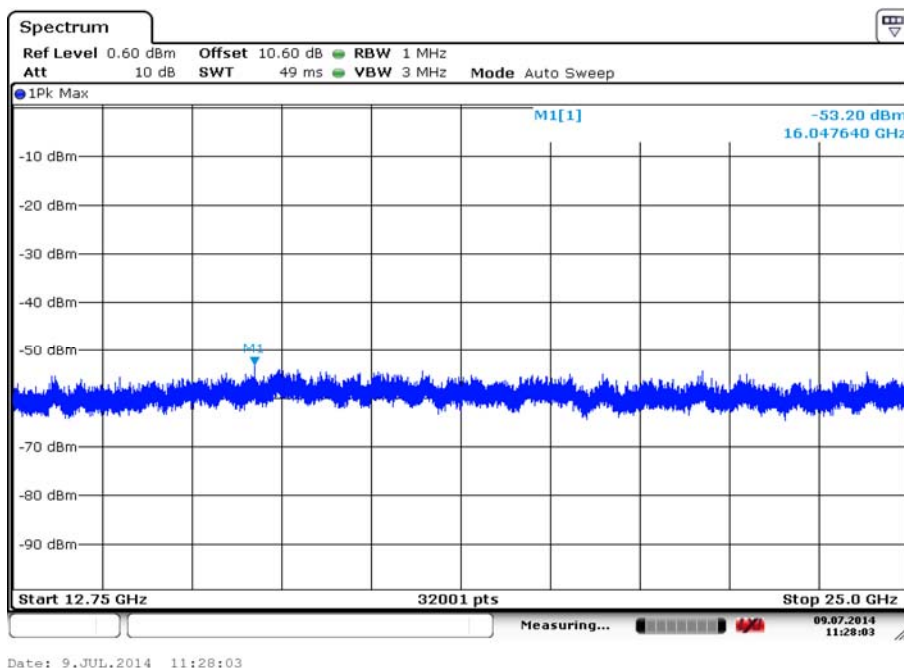


Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

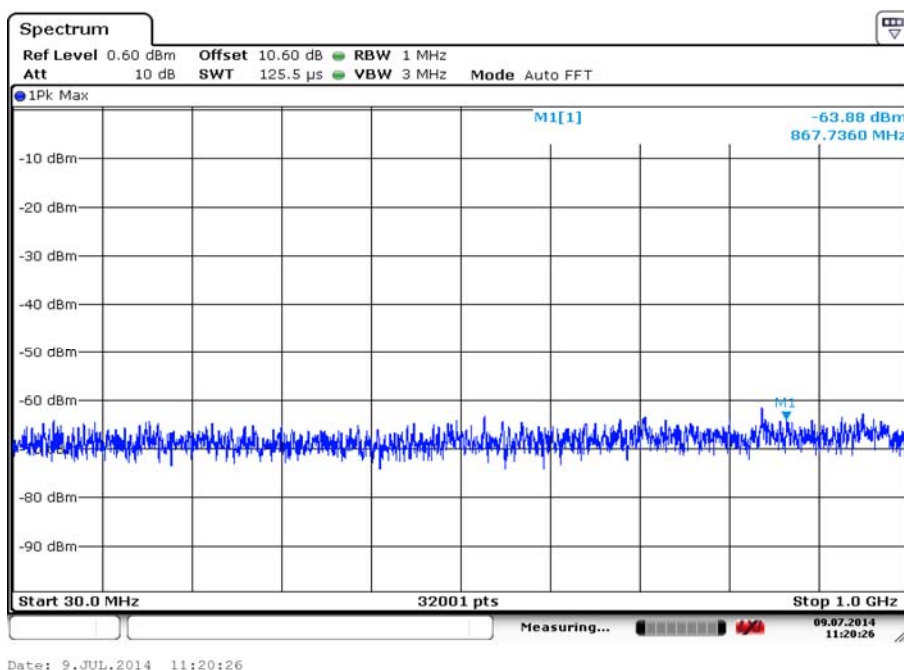


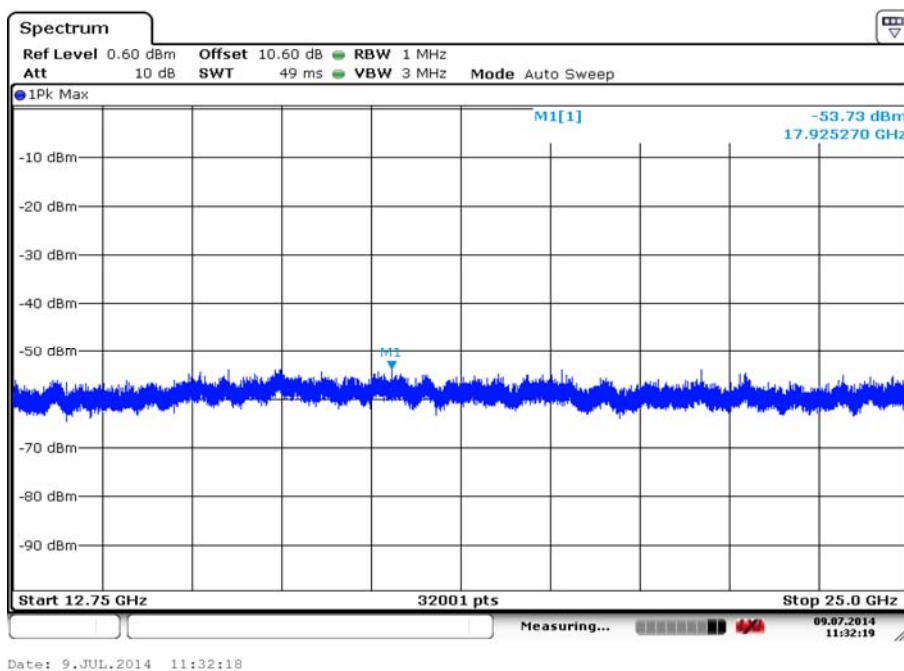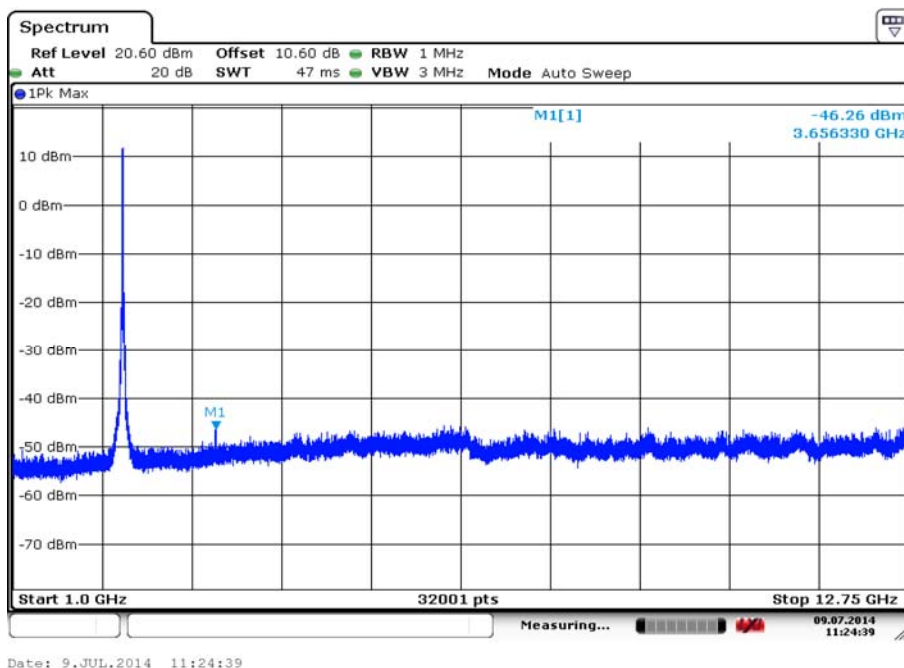


Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT20)

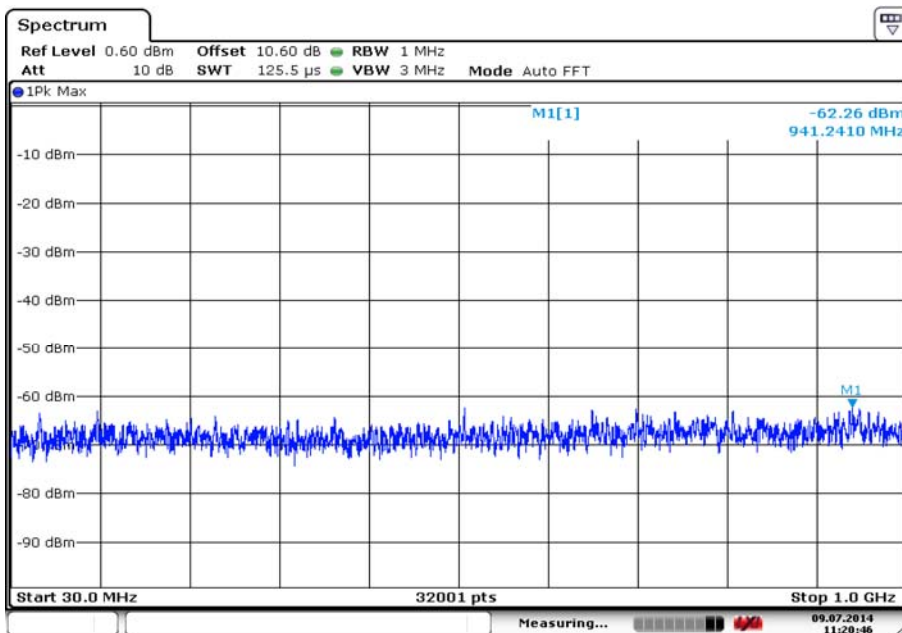

Date: 9.JUL.2014 11:20:46

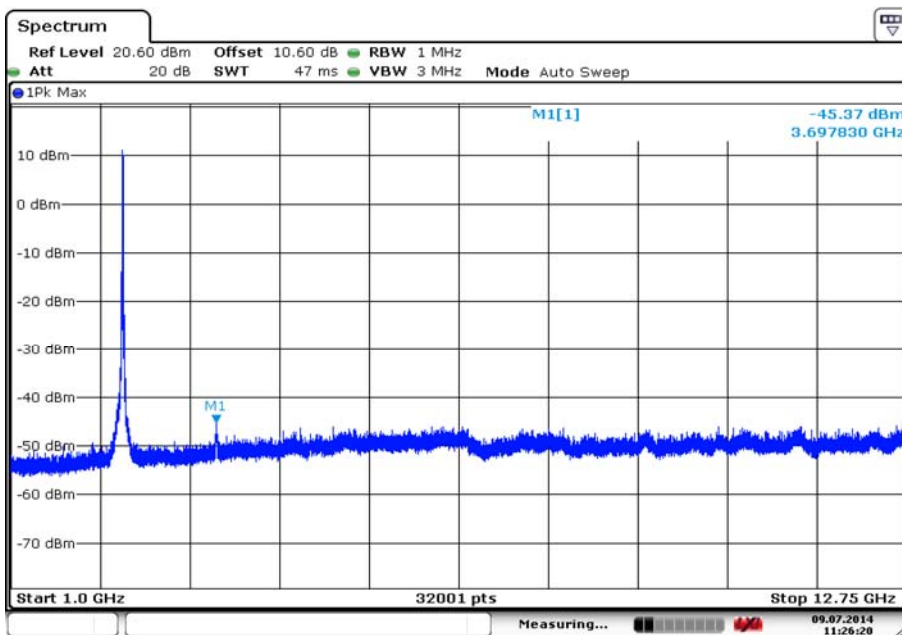

Date: 9.JUL.2014 11:26:19

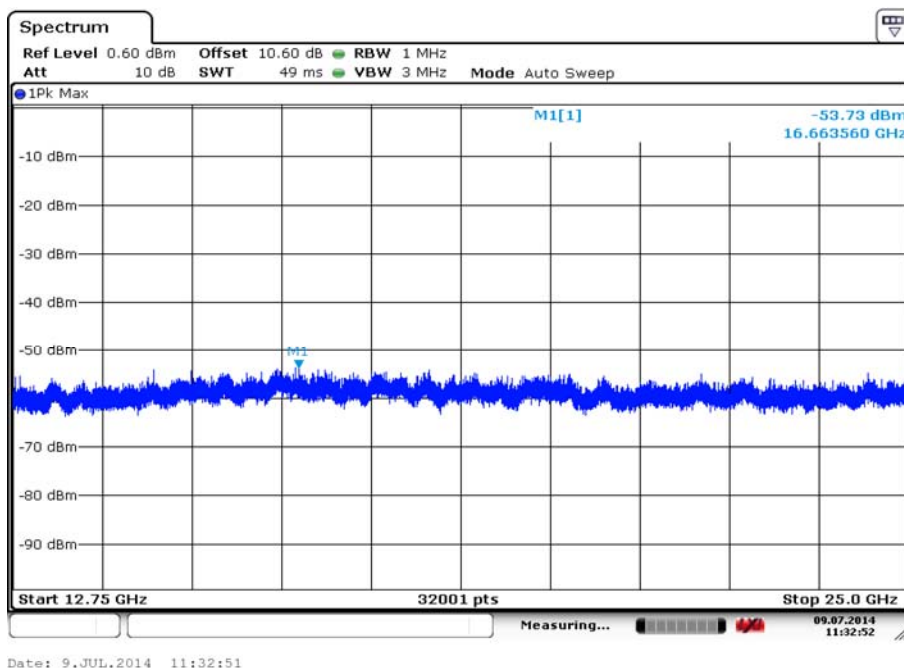

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-56.39	-2.33	-22.33
1GHz~12.75GHz	-45.57	-2.33	-22.33
12.75GHz~25GHz	-52.45	-2.33	-22.33

Carrier frequency (MHz): 2437

Channel No.:6

Test Mode: 802.11n(HT40)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.37	1.20	-18.80
1GHz~12.75GHz	-46.26	1.20	-18.80
12.75GHz~25GHz	-53.00	1.20	-18.80


Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11n(HT40)

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-62.63	-8.65	-28.65
1GHz~12.75GHz	-45.88	-8.65	-28.65
12.75GHz~25GHz	-53.13	-8.65	-28.65


Note: The Reference value see 2.2.6 Band edge compliance

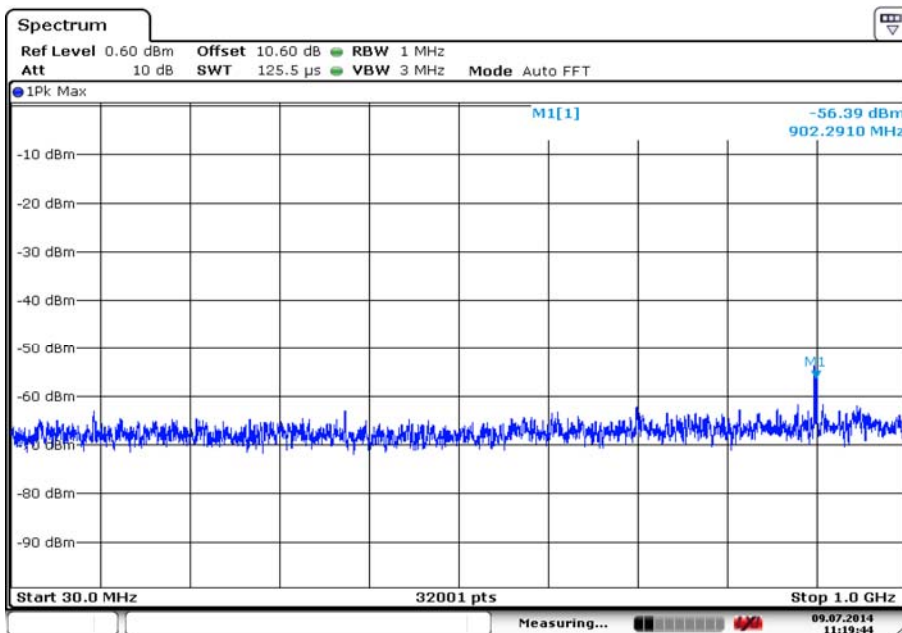


Date: 9.JUL.2014 11:19:44

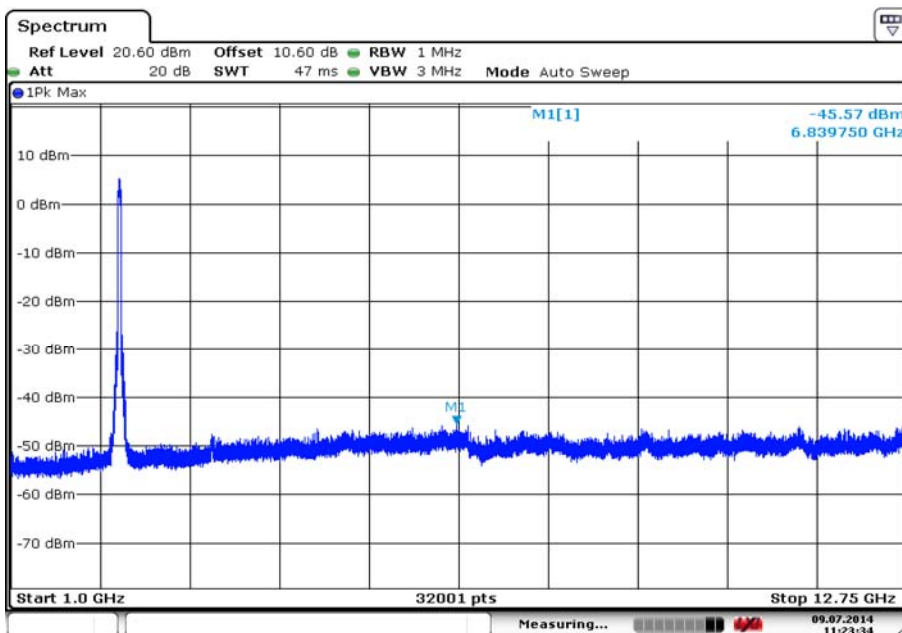


Date: 9.JUL.2014 11:23:33

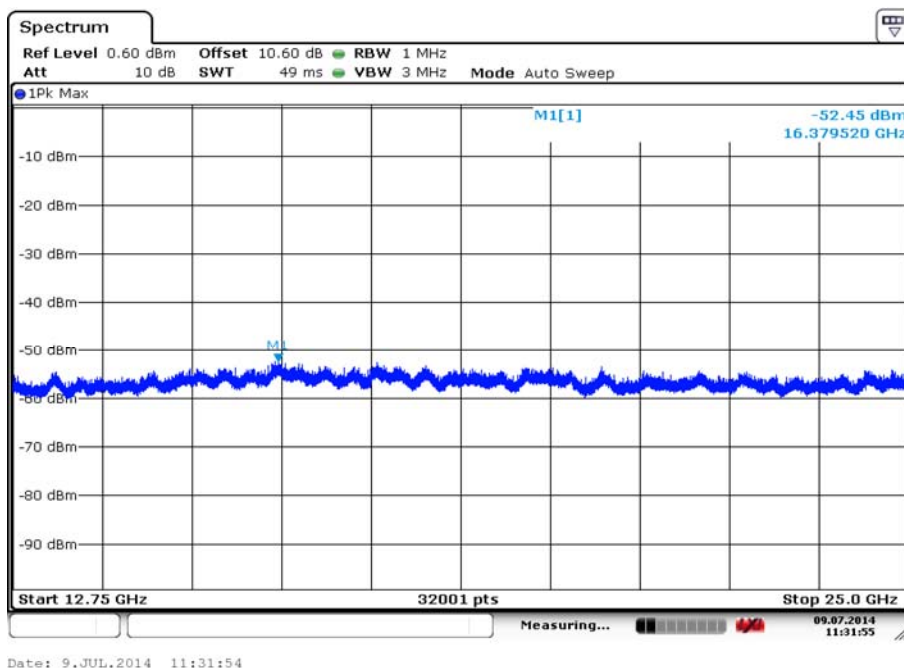


Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)

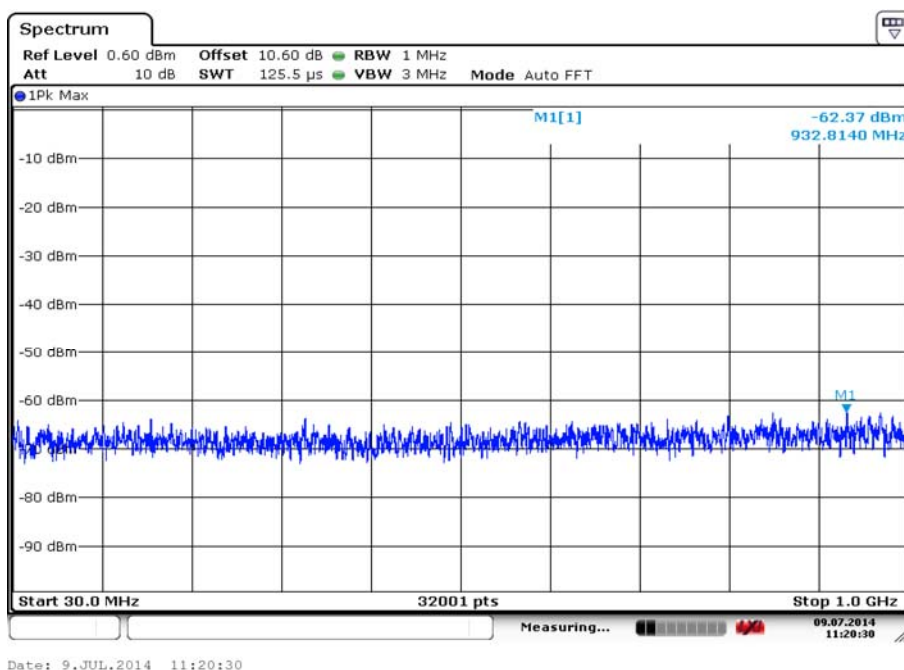


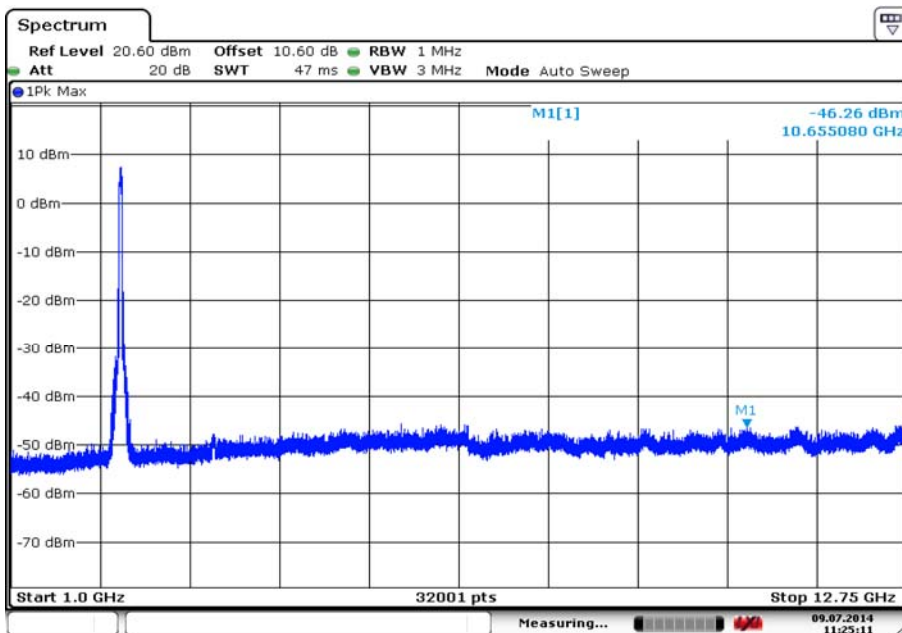



Date: 9.JUL.2014 11:25:11

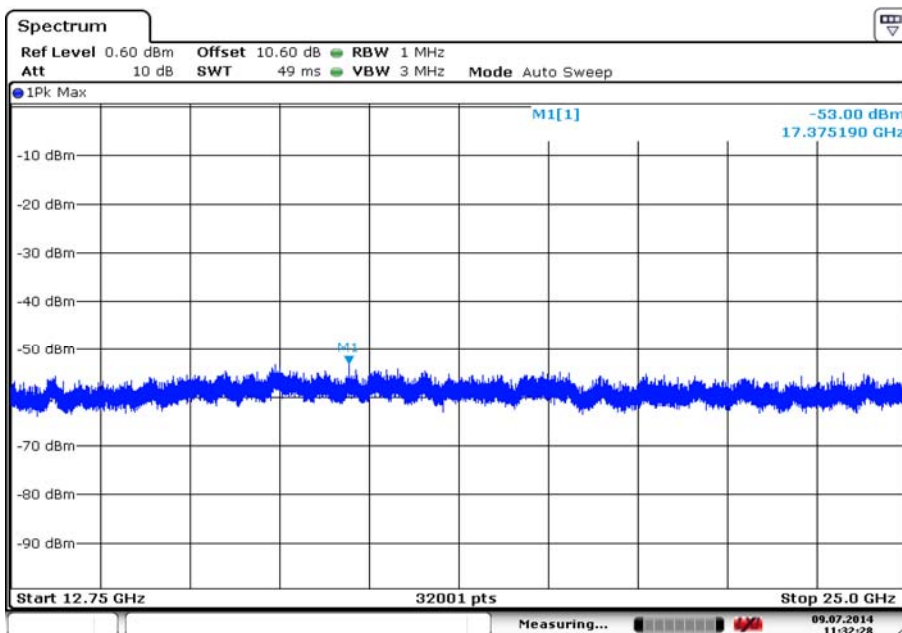

Date: 9.JUL.2014 11:32:27

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT40)

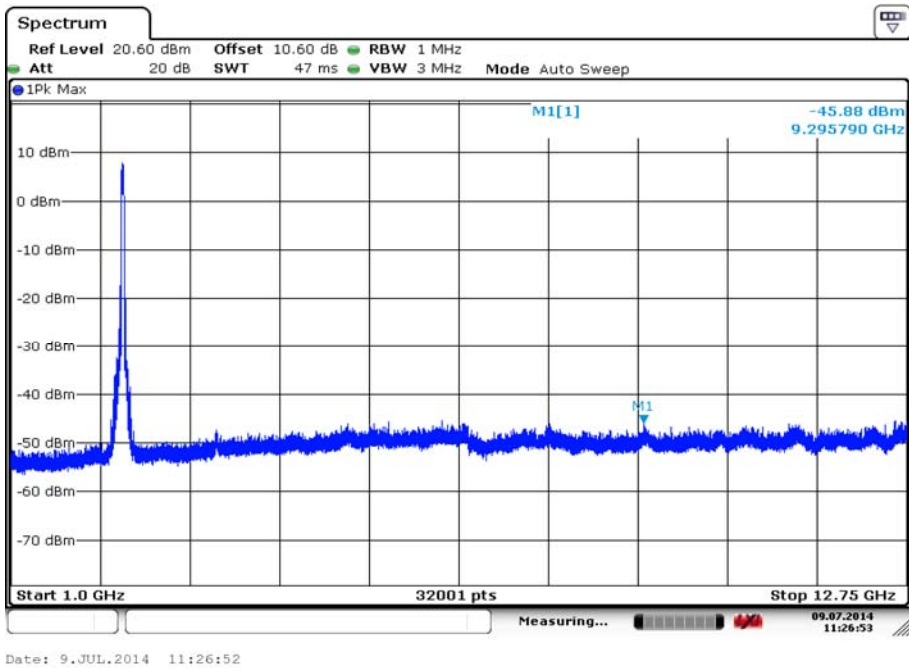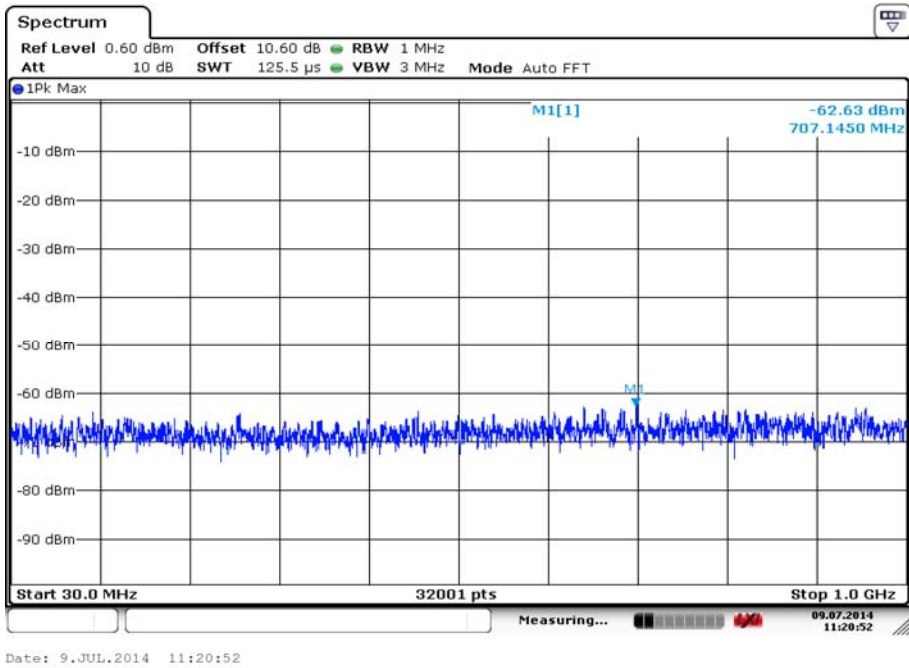

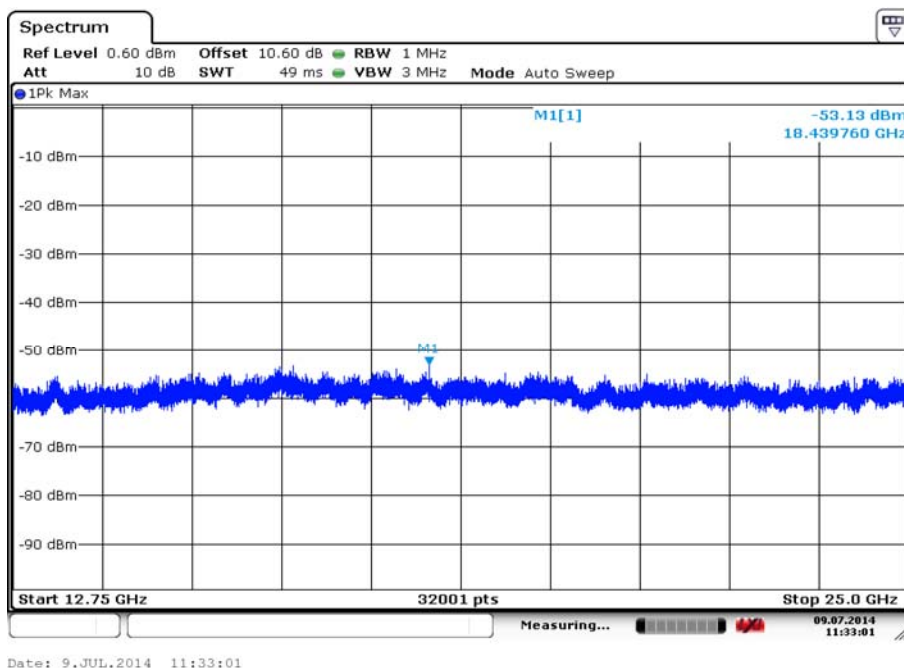

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT40)

2.2.5 Spurious Radiated Emissions

2.2.5.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.5.2 Test Description

The measurement is made according to ANSI C63.4-2009 Section 8.3 and KDB 558074 D01 DTS Meas Guidance v03r01 Section 12.2, 13.3.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.


The radiated emissions measurements were made in a typical installation configuration.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906.

During the test, the height of receive antenna shall be moved from 1 to meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The results (reference to 2.2.5.4) shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

As the fundamental emissions are sometimes too high, easily cased the amplifier overload, so add a notch filter integrated in the test system to avoid this situation (the notch filter's offset in the frequency of the fundamental bandwidth is not calculated in the test results when the level of any unwanted emissions not exceed the level of the fundamental frequency.)

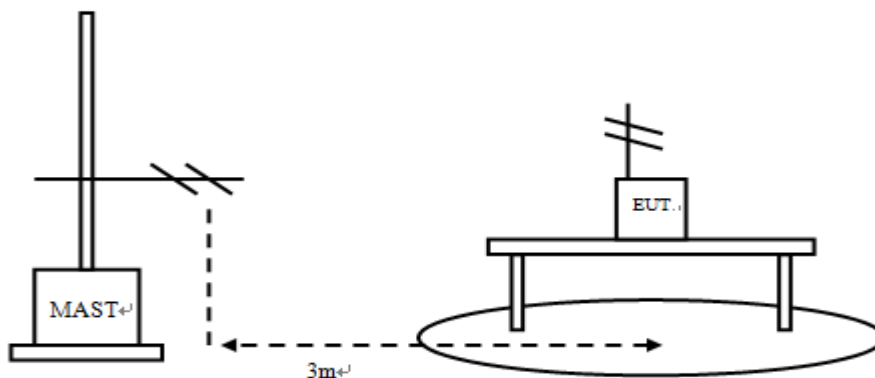

Test Procedures Used

KDB 558074 v03r01 – Section 12.2.5 (average power measurements)

KDB 558074 v03r01 – Section 12.2.4 (peak power measurements)

Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

2.2.5.3 Test limit

FCC Part15.247(d):

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part15.209:

Radiated Emission Limits

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

FCC Part15.35(b):

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

2.2.5.4 Test result

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

The worst case attitude: The mobile lay down.

For 802.11b

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
41.04	23.10	15.30	7.80	Vertical	40.0
86.22	18.30	8.30	10.00	Vertical	40.0
102.10	13.30	9.30	4.00	Vertical	43.5
294.70	10.90	12.30	-1.40	Vertical	46.0
549.68	18.10	19.10	-1.00	Vertical	46.0
940.58	26.30	25.40	0.90	Vertical	46.0

For 802.11g

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
30.12	18.40	15.30	3.10	Vertical	40.0
40.62	23.40	15.50	7.90	Vertical	40.0
87.84	17.00	8.4	8.60	Vertical	40.0
101.74	13.80	9.3	4.50	Vertical	43.5
558.14	18.30	19.40	-1.10	Vertical	46.0
922.88	25.20	25.50	-0.30	Vertical	46.0

For 802.11n(HT20)


Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.62	23.60	15.50	8.10	Vertical	40.0
85.02	17.40	8.20	9.20	Vertical	40.0
101.74	13.80	9.30	4.50	Vertical	40.0
300.74	11.70	12.40	-0.70	Vertical	43.5
555.44	18.20	19.30	-1.10	Vertical	46.0
929.78	25.20	25.40	-0.20	Vertical	46.0

For 802.11n(HT40)

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
30.12	18.40	15.30	3.10	Vertical	40.0
40.62	24.20	15.50	8.70	Vertical	40.0
85.32	18.20	8.30	9.90	Vertical	40.0
550.04	18.00	19.20	-1.20	Vertical	46.0
733.28	21.70	22.60	-0.90	Vertical	46.0
932.24	25.20	25.40	-0.20	Vertical	46.0

Carrier frequency (MHz): 2437


Channel No.:6

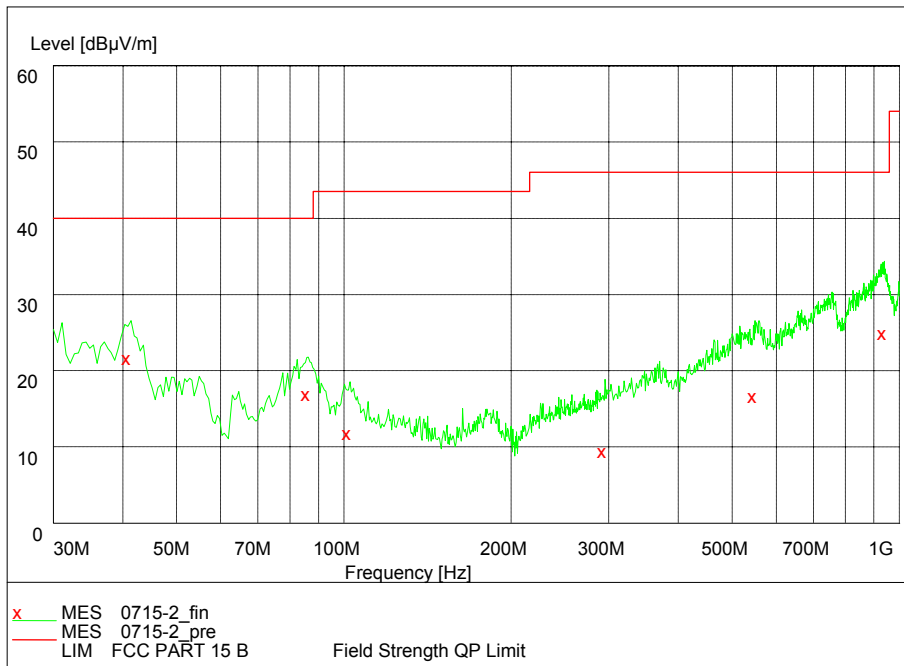

Frequency Range: 30MHz -1GHz

Detector: QP mode


Test Mode: 802.11b

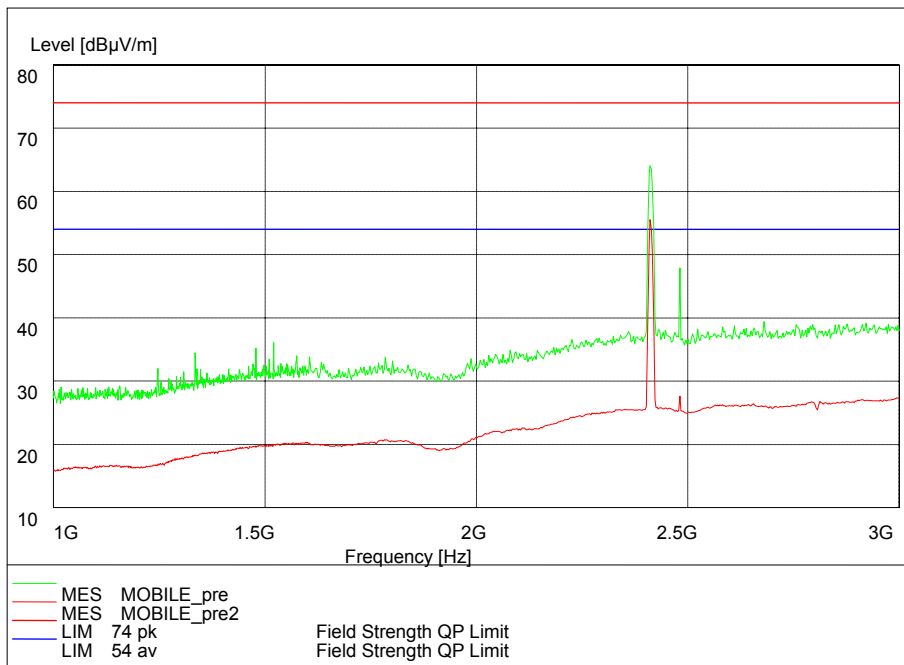


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11b

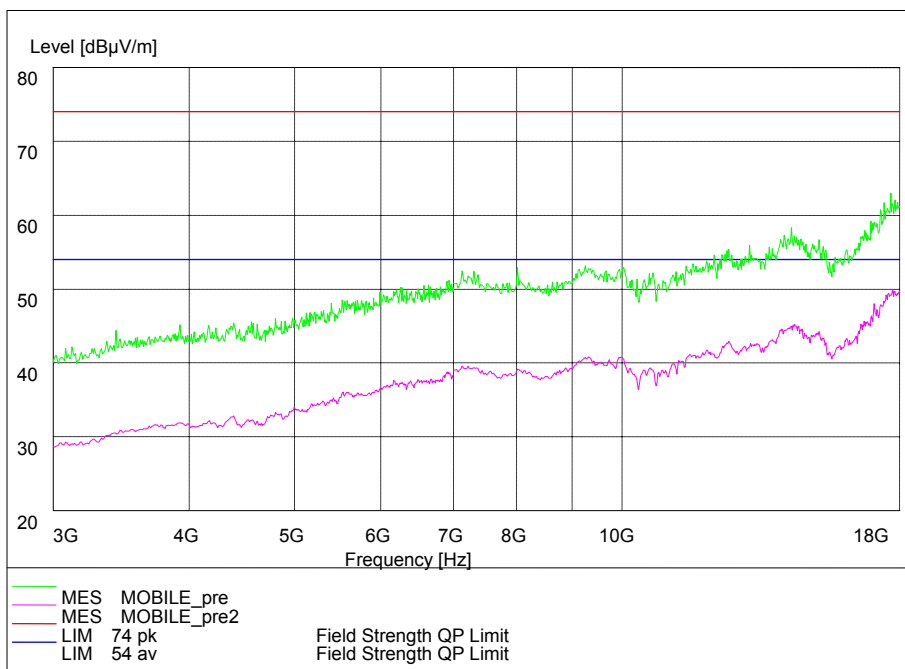

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

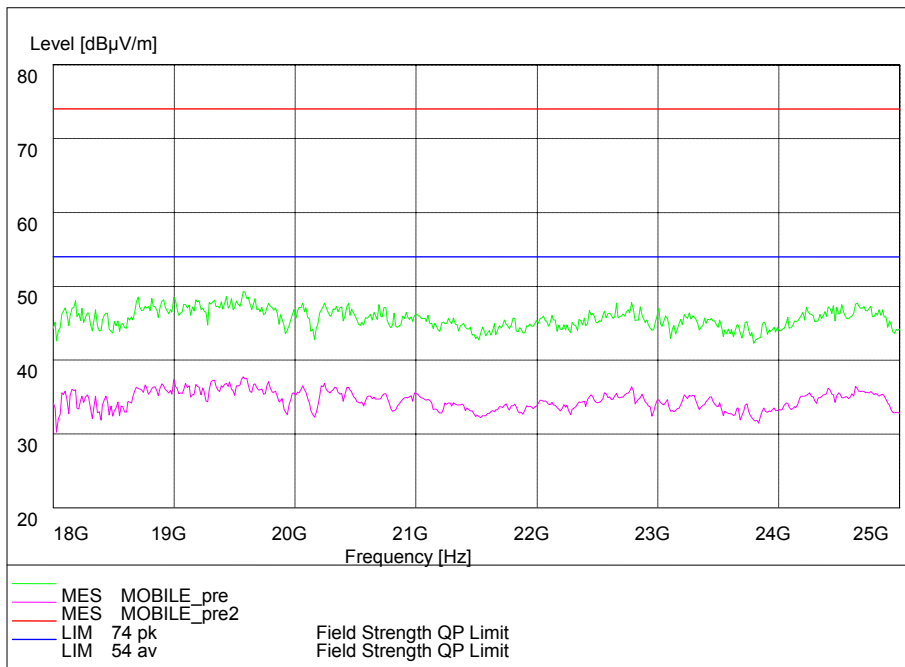


Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

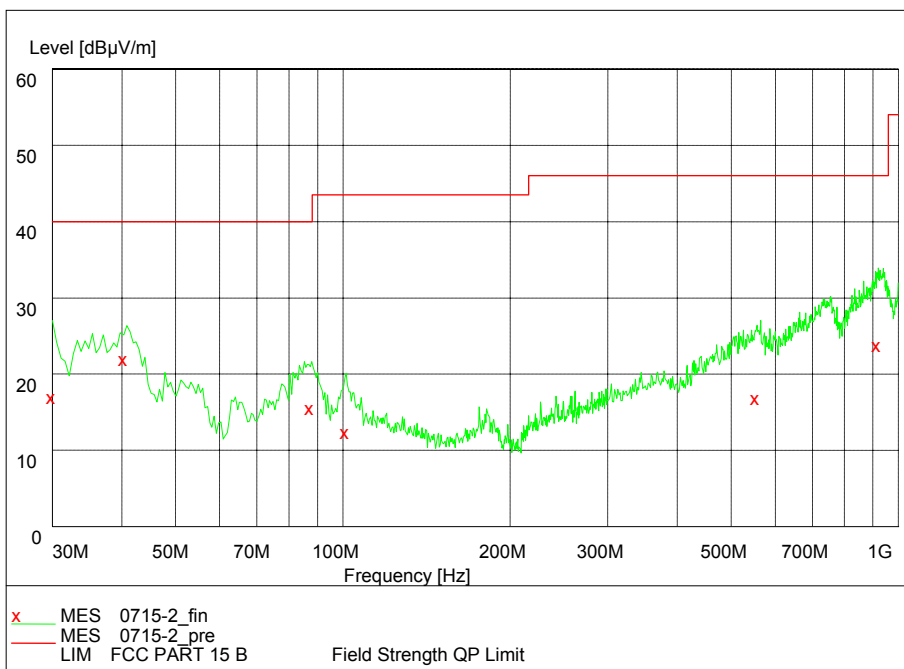

Frequency Range: 30MHz -1GHz

Detector: QP mode


Modulation type: 802.11g

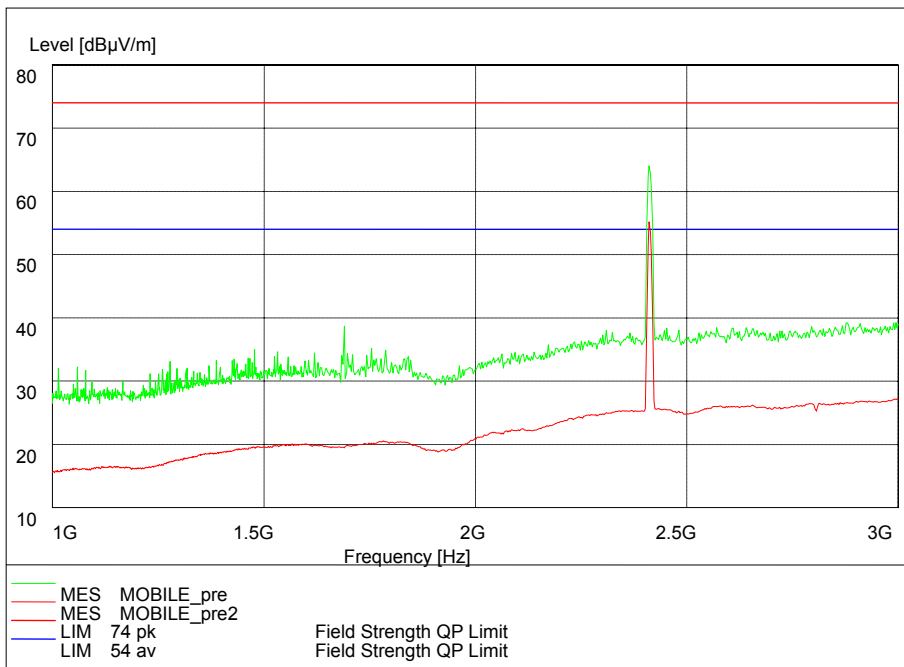


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11g

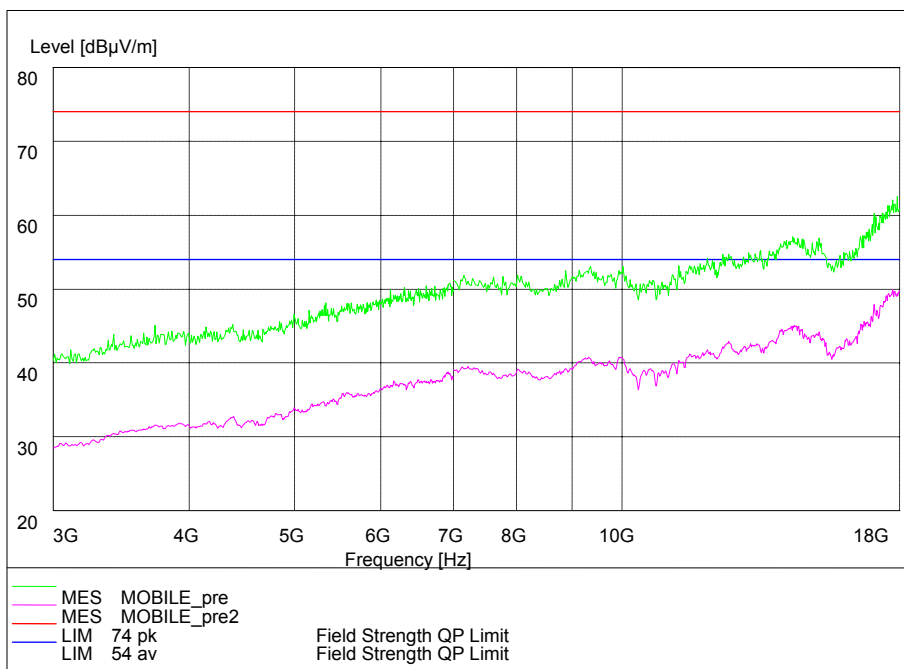

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

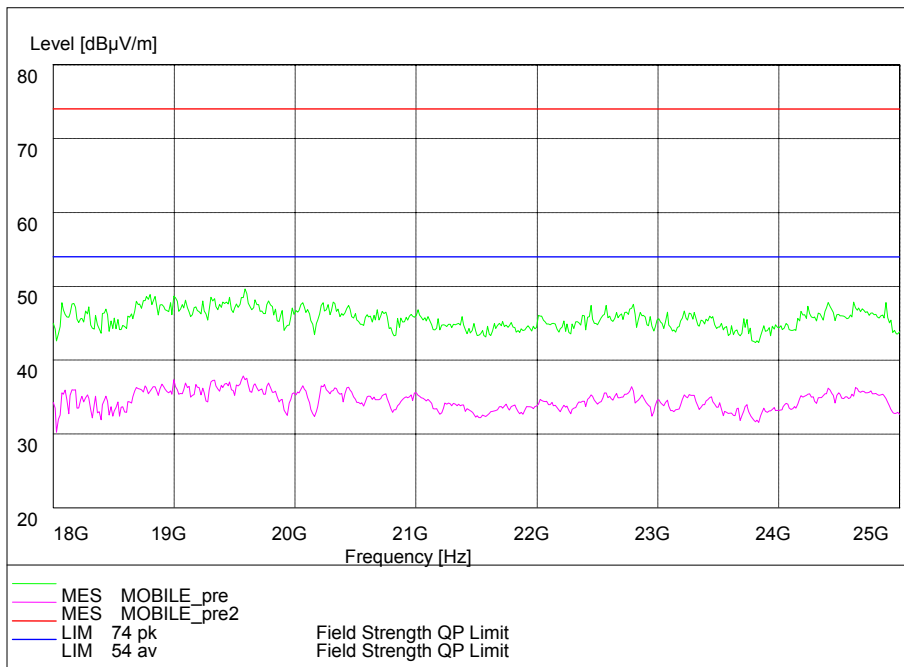


Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

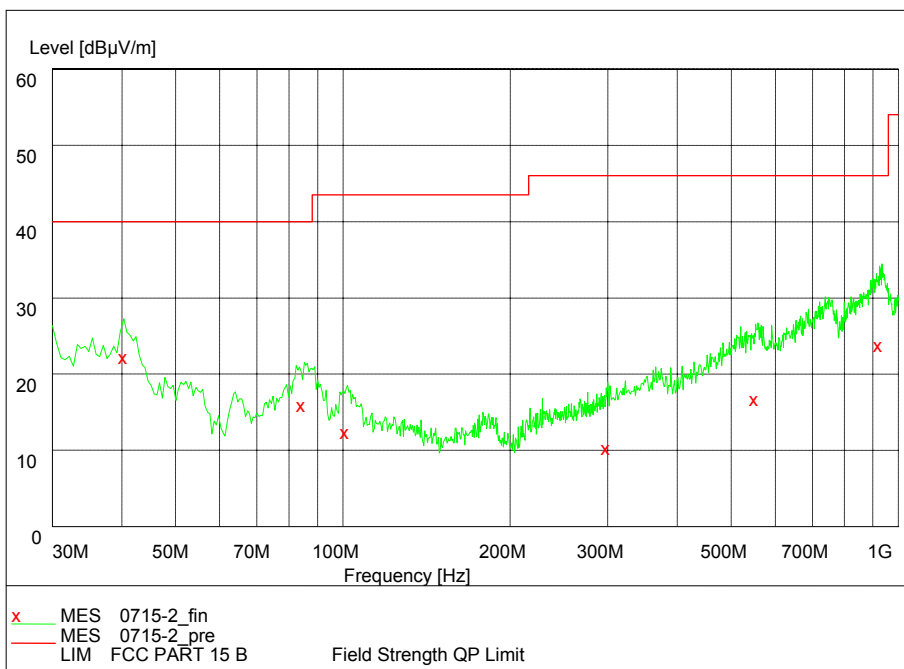

Frequency Range: 30MHz -1GHz

Detector: QP mode


Test Mode: 802.11n(HT20)

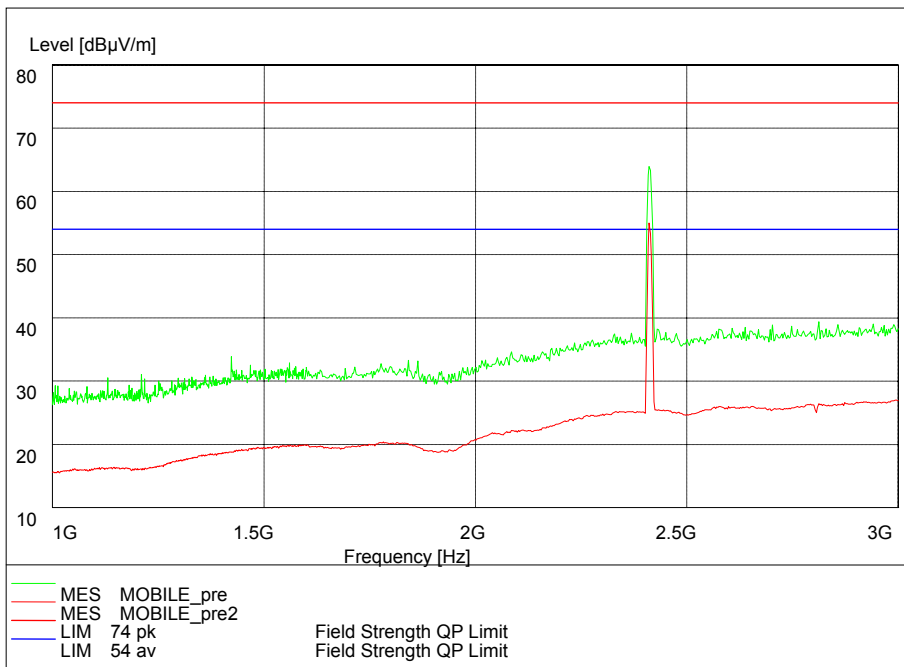


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)

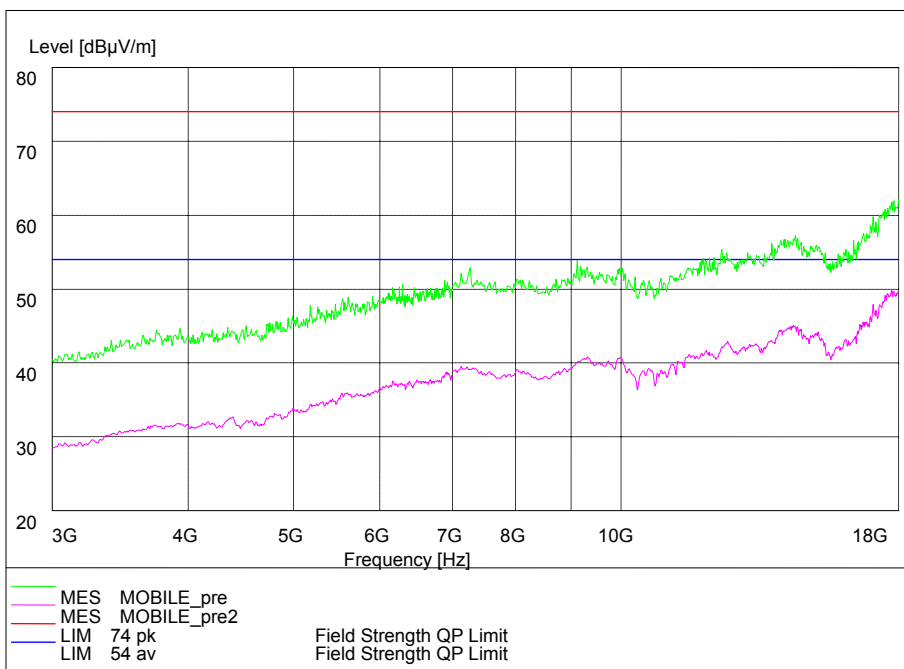

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

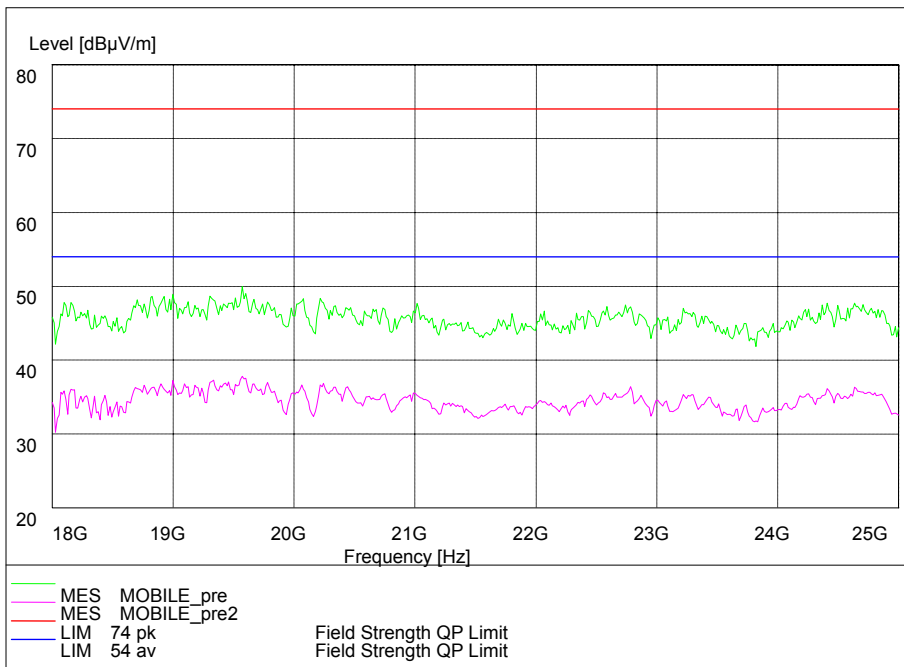


Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

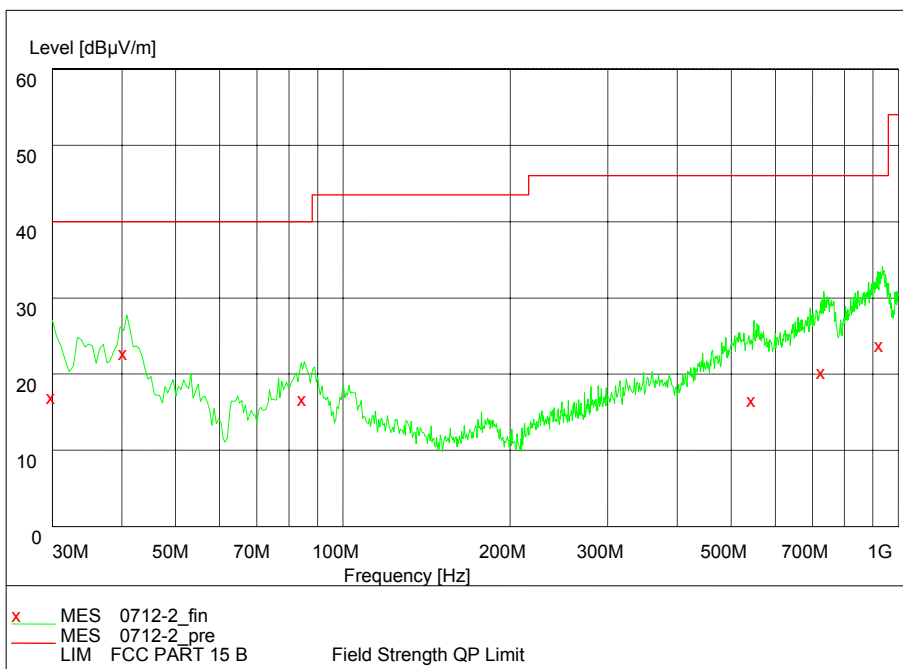

Frequency Range: 30MHz -1GHz

Detector: QP mode


Modulation type: 802.11n(HT40)

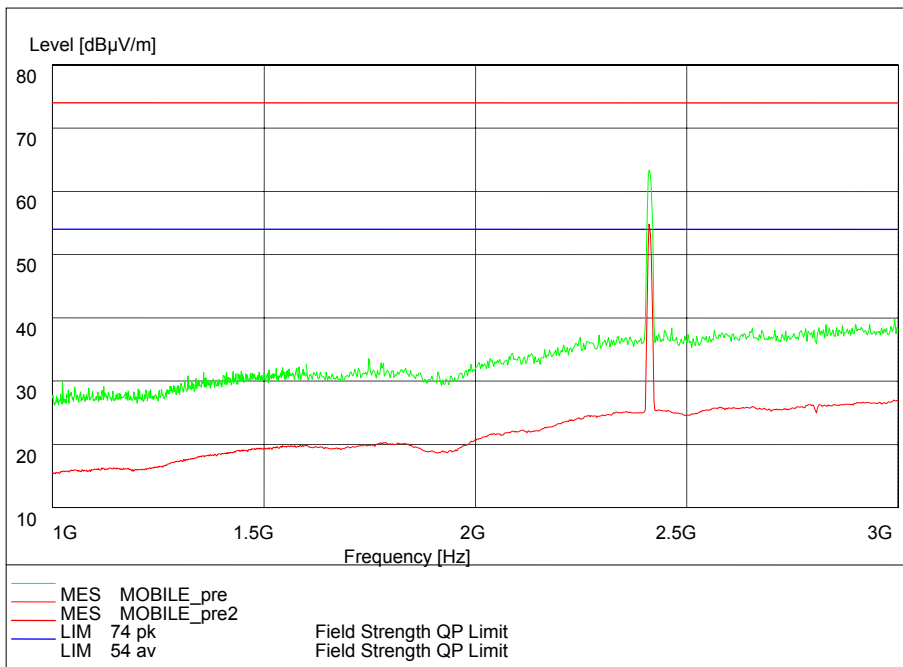


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT40)

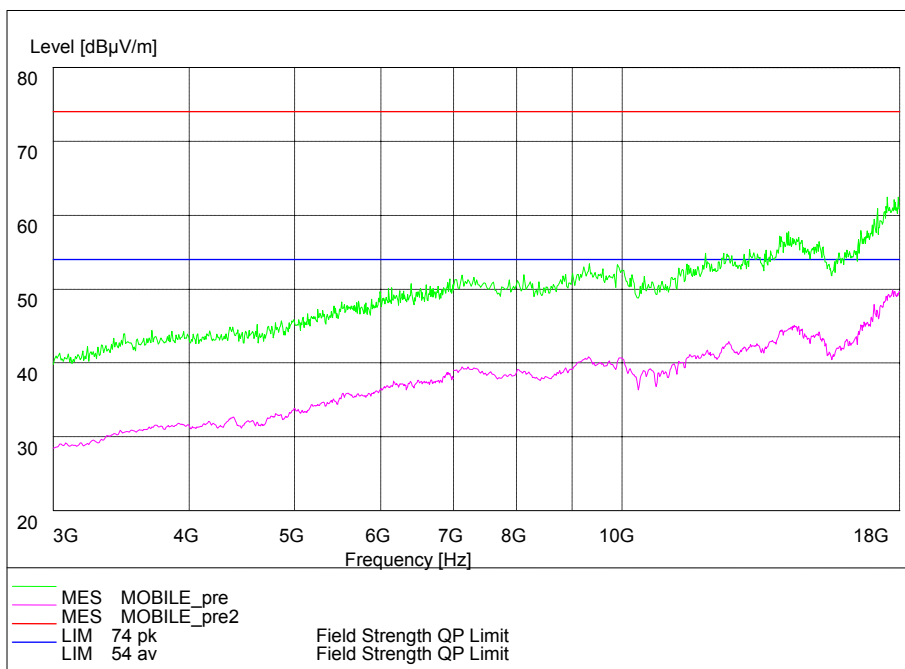

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)

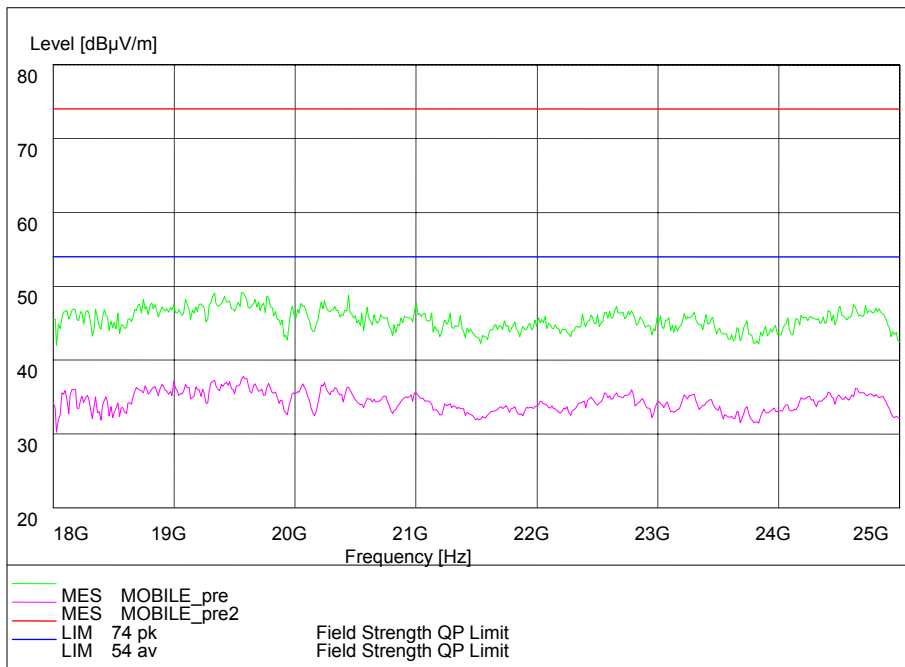

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)

2.2.6 Band Edge Compliance

2.2.6.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.6.2 Test Description

The measurement is made according to KDB 558074 D01 DTS Meas Guidance v03r01 Section 13.3.

2.2.6.2.1 RF Conducted Measurement

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to the spectrum analyzer and WiFi test set via a power splitter with a known loss.

For the first measurement the EUT is set to transmit on the lowest channel (2412 MHz). The lower band edge is 2400 MHz.


Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2462MHz). The higher band edge is 2483.5 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

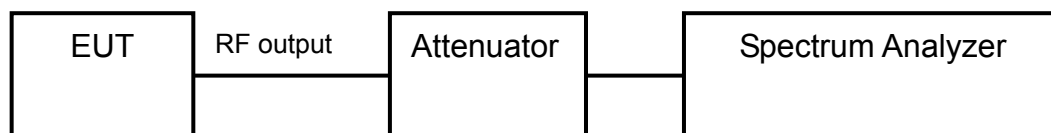


2.2.6.2.2 Radiated Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The results (reference to 2.2.6.5) shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

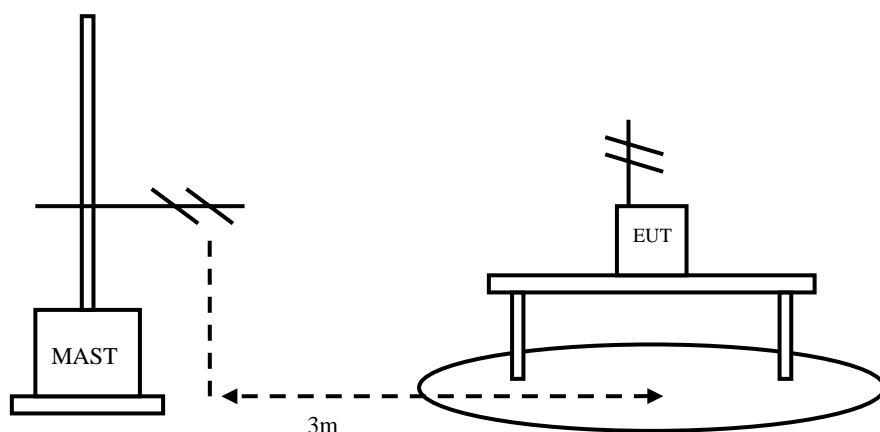

Test Procedures Used

KDB 558074 v03r01 – Section 13.3 Integration method

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

2.2.6.3 Test limit

FCC Part15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

2.2.6.4 Test result

2.2.6.4.1 RF Conducted Measurement

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b


Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2400	-36.18	7.59	-12.41

Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11b

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2483.5	-54.64	7.94	-12.06

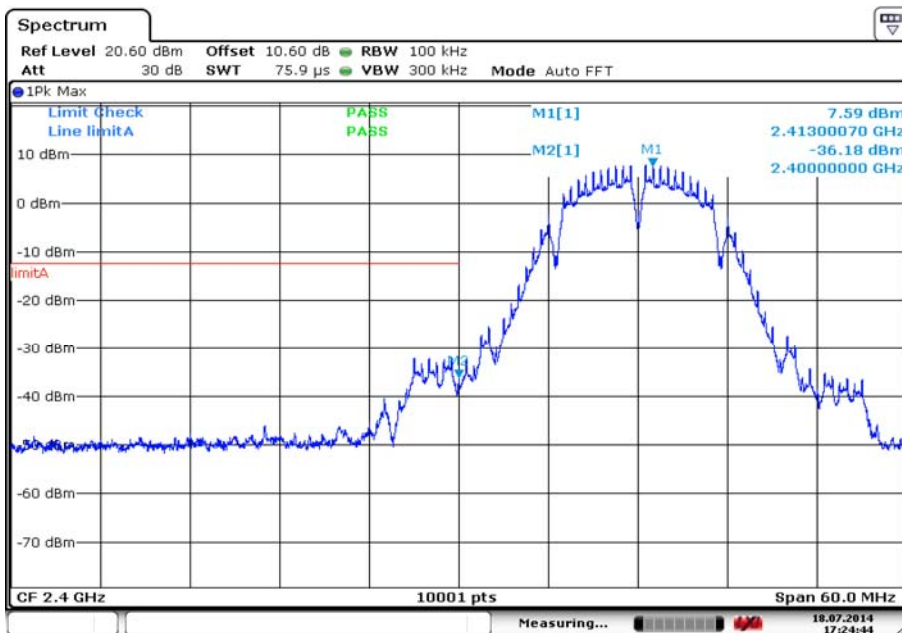


Date: 18.JUL.2014 17:24:44

Carrier frequency (MHz): 2412
 Channel No.:1
 Test Mode: 802.11b

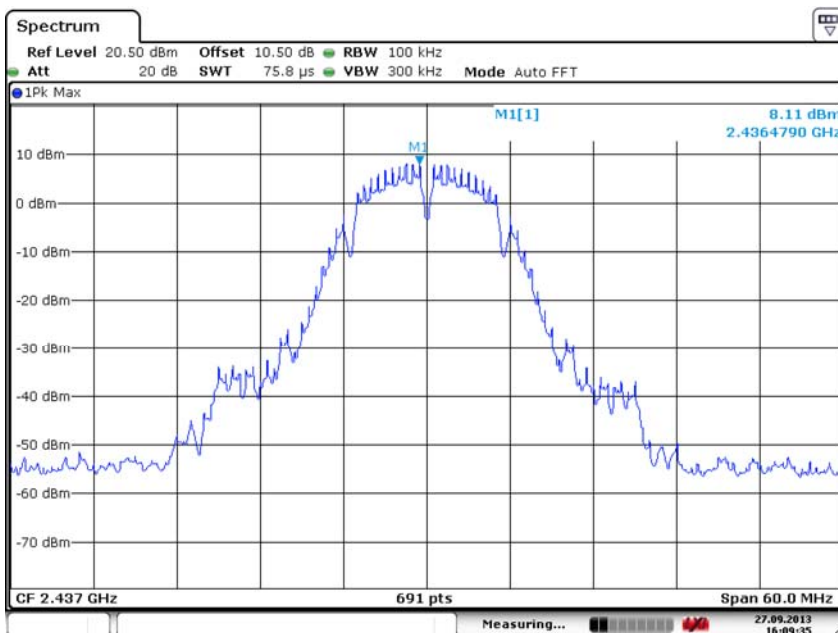

Date: 27.SEP.2013 16:09:33

Carrier frequency (MHz): 2437
 Channel No.:6
 Test Mode: 802.11b

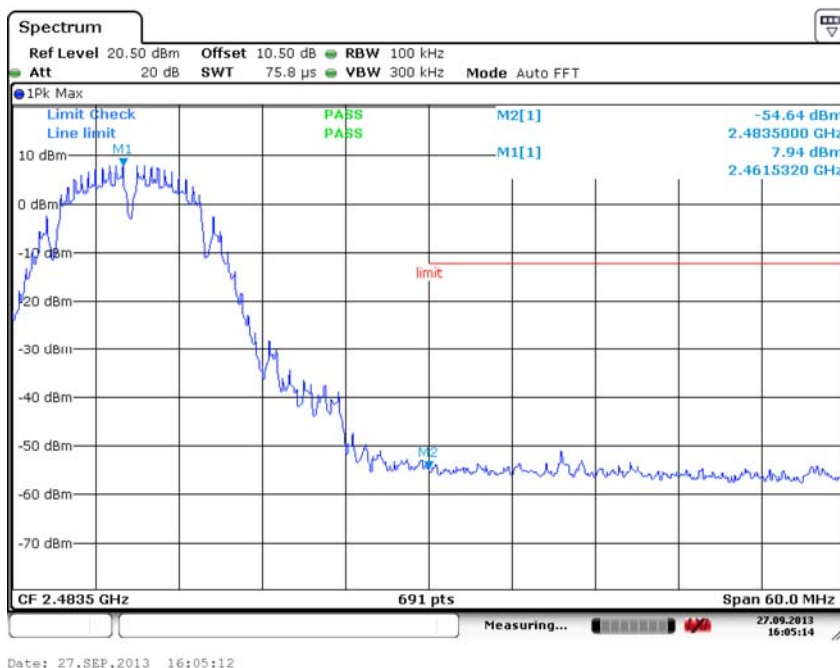


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2400	-33.02	3.11	-16.89


Carrier frequency (MHz): 2462
Channel No.:13
Test Mode: 802.11g

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2483.5	-45.15	7.94	-12.06

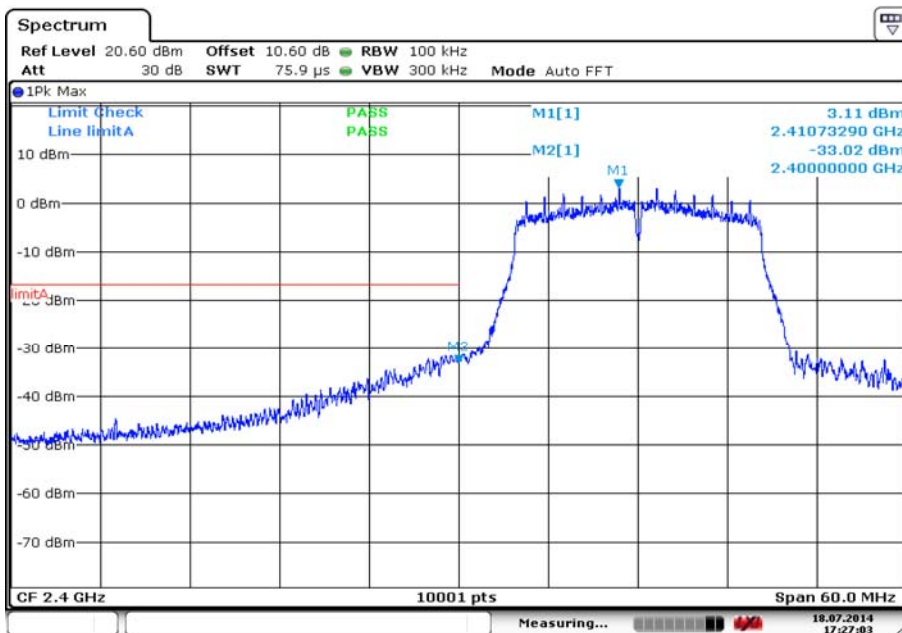


Date: 18.JUL.2014 17:27:04

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

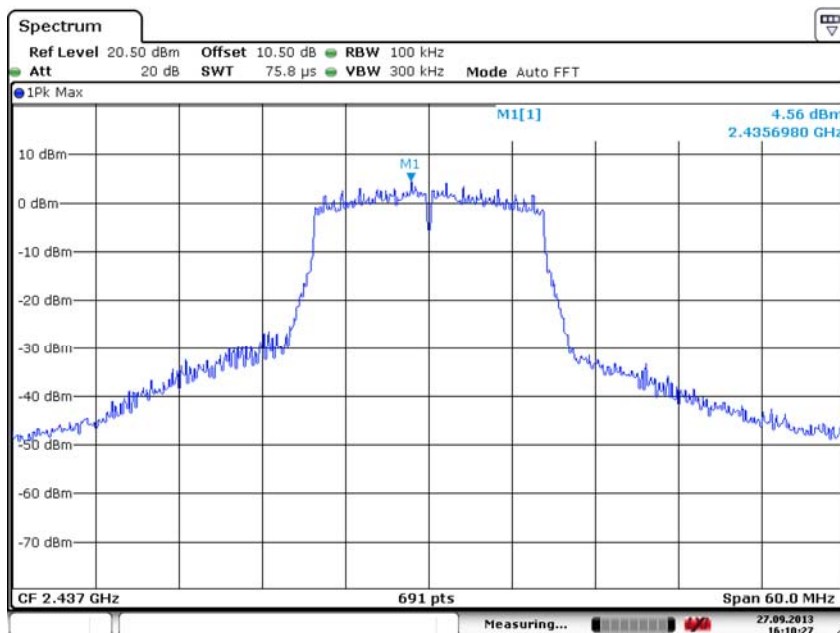

Date: 27.SEP.2013 16:10:25

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

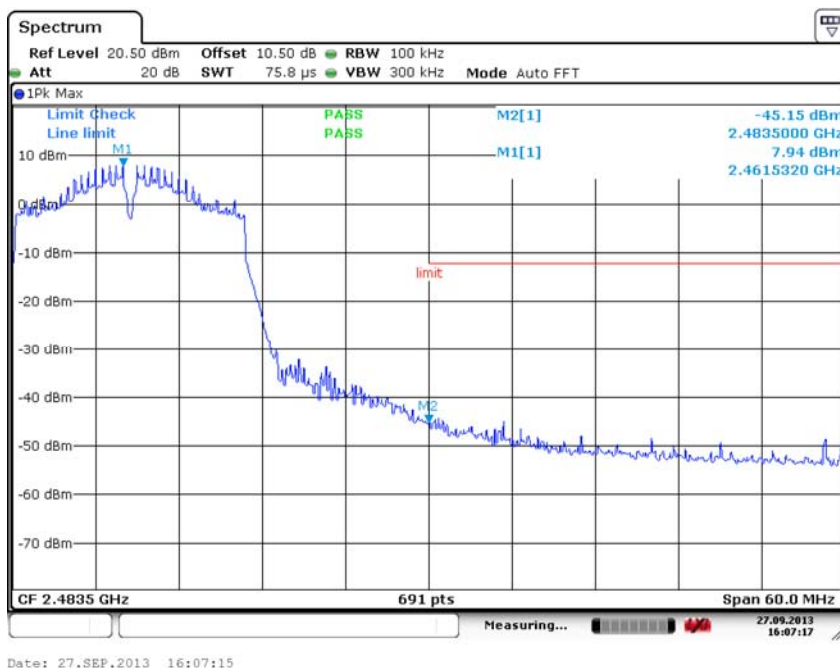


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2400	-33.21	2.74	-17.26


Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2483.5	-39.00	3.62	-16.38

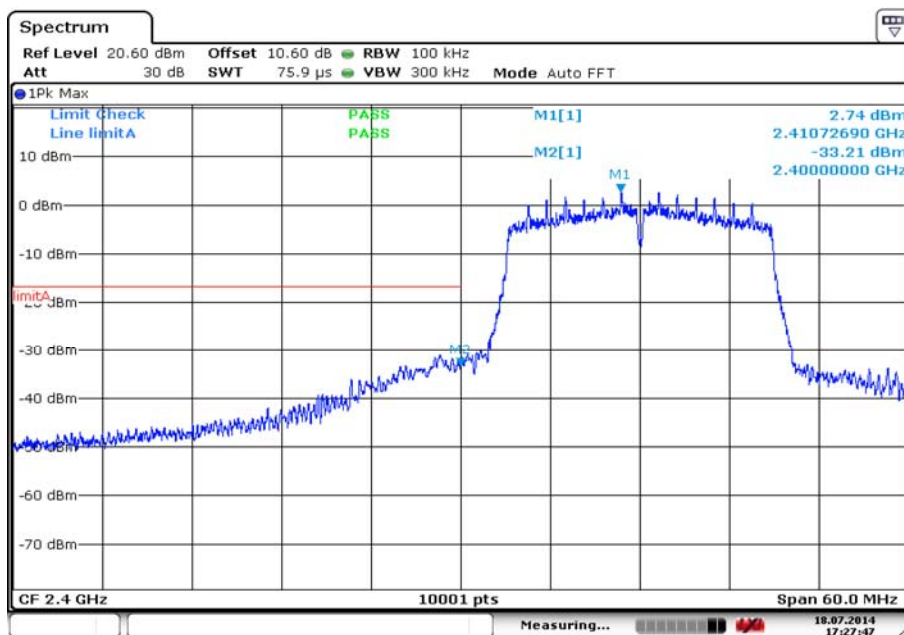


Date: 18.JUL.2014 17:27:47

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

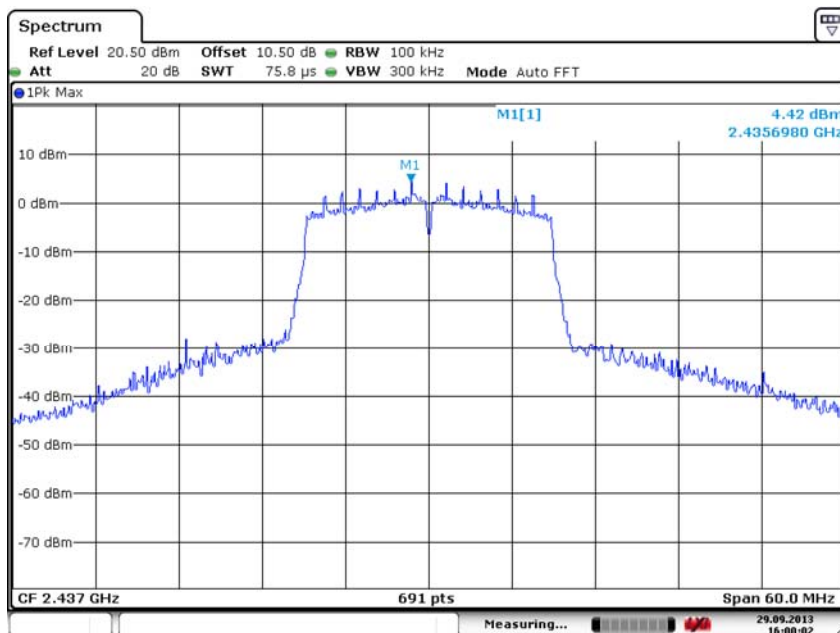

Date: 29.SEP.2013 15:59:58

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT20)

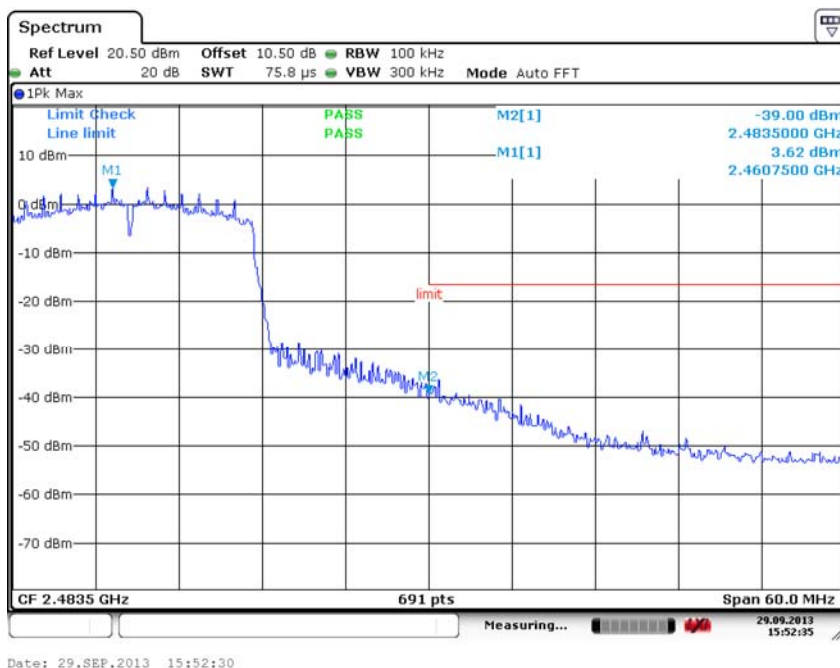


Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11n(HT20)

Carrier frequency (MHz): 2422
 Channel No.:3
 Test Mode: 802.11n(HT40)

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2400	-43.78	-2.33	-22.33


Carrier frequency (MHz): 2462
 Channel No.:11
 Test Mode: 802.11n(HT40)

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm
2483.5	-51.68	-8.65	-28.65

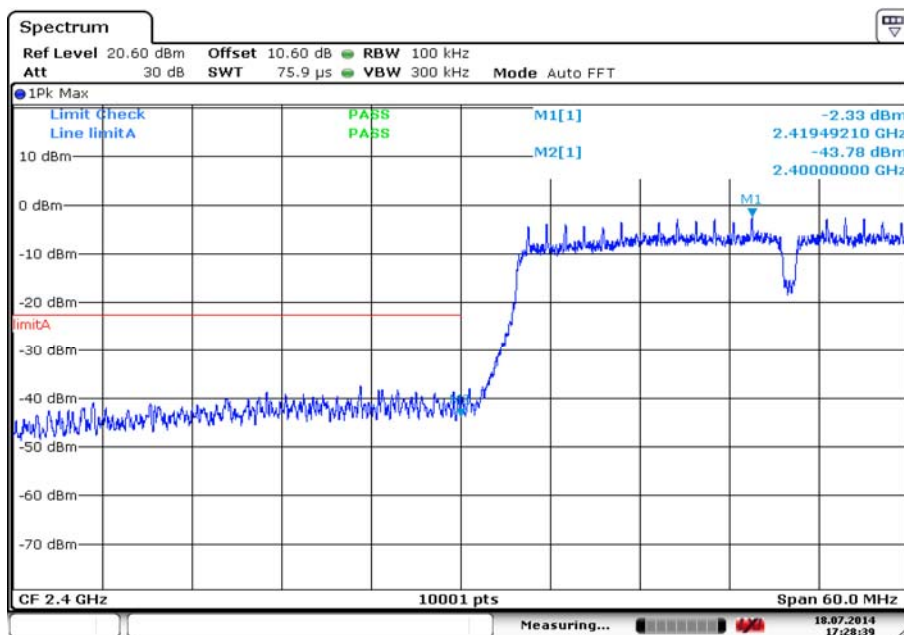


Date: 18.JUL.2014 17:28:39

Carrier frequency (MHz): 2422
 Channel No.:3
 Test Mode: 802.11n(HT40)

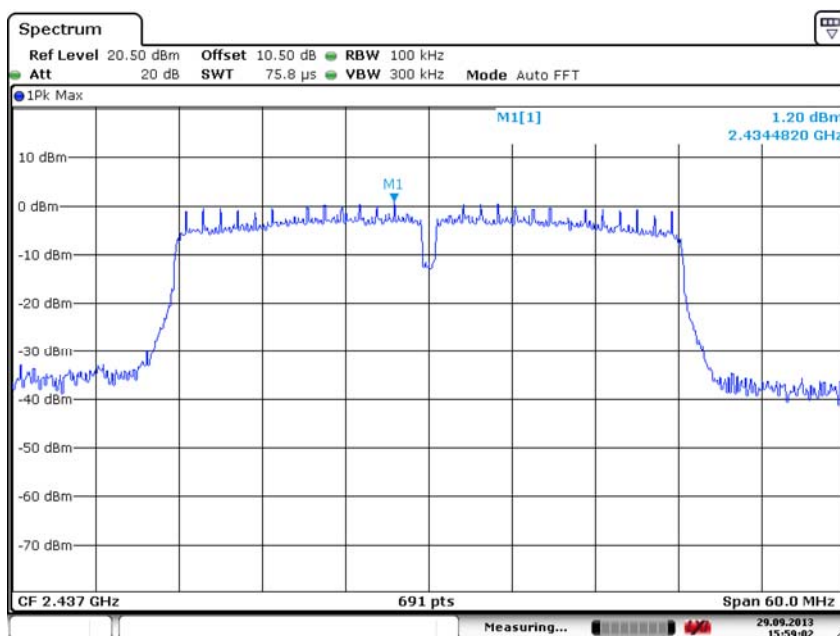

Date: 29.SEP.2013 15:58:57

Carrier frequency (MHz): 2437
 Channel No.:6
 Test Mode: 802.11n(HT40)

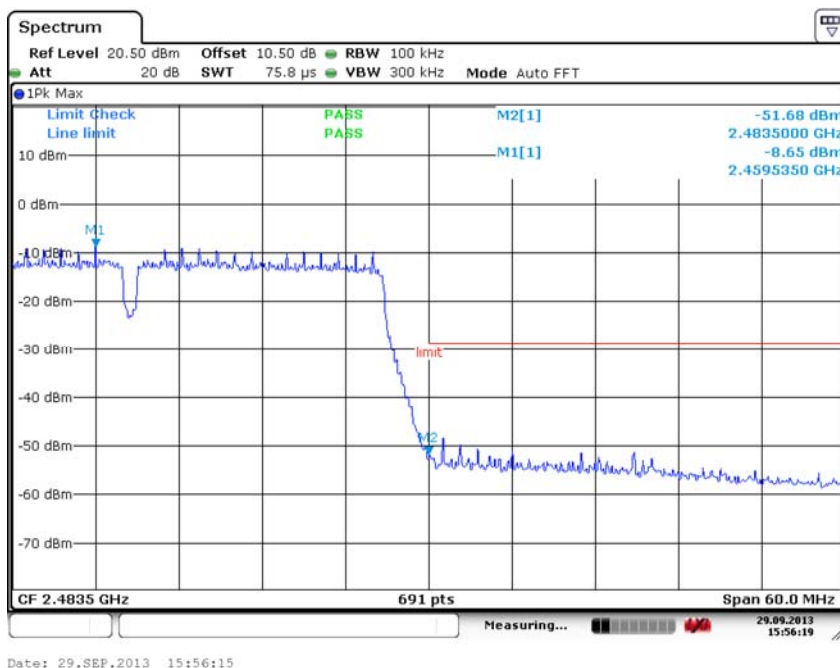

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT40)

2.2.6.4.2 Radiated Emission Band Edge

The worst case attitude: The mobile lay down.

Peak detector: RBW=1MHz,VBW=3MHz,sweep time= auto;
Average detector: RBW=1MHz,VBW=3MHz,sweep time=auto;

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	100.15	66.15	N/A	N/A	8.90	25.10
2	2390	55.93	21.93	-18.07	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.69	62.69	N/A	N/A	8.90	25.10
2	2390	54.71	20.71	-19.29	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	94.75	60.75	N/A	N/A	8.90	25.10
2	2390	42.97	8.97	-11.03	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	86.71	52.71	N/A	N/A	8.90	25.10
2	2390	42.58	8.58	-11.42	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.93	66.93	N/A	N/A	8.90	25.10
2	2483.5	57.37	23.37	-16.63	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.70	61.70	N/A	N/A	8.90	25.10
2	2483.5	57.41	23.41	-16.59	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.11	59.11	N/A	N/A	8.90	25.10
2	2483.5	42.25	8.25	-11.75	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.26	54.26	N/A	N/A	8.90	25.10
2	2483.5	41.77	7.77	-12.23	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	102.58	68.58	N/A	N/A	8.90	25.10
2	2390	56.00	22.00	-18.00	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	94.31	60.31	N/A	N/A	8.90	25.10
2	2390	57.25	23.25	-16.75	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.11	58.11	N/A	N/A	8.90	25.10
2	2390	42.11	8.11	-11.89	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	85.78	51.78	N/A	N/A	8.90	25.10
2	2390	41.84	7.84	-12.16	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.99	67.99	N/A	N/A	8.90	25.10
2	2483.5	54.60	20.60	-19.40	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.73	62.73	N/A	N/A	8.90	25.10
2	2483.5	54.50	20.50	-19.50	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.29	59.29	N/A	N/A	8.90	25.10
2	2483.5	42.75	8.75	-11.25	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	86.01	52.01	N/A	N/A	8.90	25.10
2	2483.5	42.41	8.41	-11.59	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	100.38	66.38	N/A	N/A	8.90	25.10
2	2390	54.79	20.79	-19.21	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.54	64.54	N/A	N/A	8.90	25.10
2	2390	54.85	20.85	-19.15	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	91.62	57.62	N/A	N/A	8.90	25.10
2	2390	42.02	8.02	-11.98	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	86.74	52.74	N/A	N/A	8.90	25.10
2	2390	42.84	8.84	-11.16	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.20	67.20	N/A	N/A	8.90	25.10
2	2483.5	57.10	23.10	-16.90	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.10	61.10	N/A	N/A	8.90	25.10
2	2483.5	56.83	22.83	-17.17	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.47	58.47	N/A	N/A	8.90	25.10
2	2483.5	41.23	7.23	-12.77	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.16	54.16	N/A	N/A	8.90	25.10
2	2483.5	42.59	8.59	-11.41	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	100.35	66.35	N/A	N/A	8.90	25.10
2	2390	57.16	23.16	-16.84	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	97.23	63.23	N/A	N/A	8.90	25.10
2	2390	55.57	21.57	-18.43	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	93.72	59.72	N/A	N/A	8.90	25.10
2	2390	42.84	8.84	-11.16	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	86.58	52.58	N/A	N/A	8.90	25.10
2	2390	42.35	8.35	-11.65	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.85	67.85	N/A	N/A	8.90	25.10
2	2483.5	55.37	21.37	-18.63	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.56	61.56	N/A	N/A	8.90	25.10
2	2483.5	55.99	21.99	-18.01	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	91.96	57.96	N/A	N/A	8.90	25.10
2	2483.5	42.35	8.35	-11.65	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.11

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.20	54.20	N/A	N/A	8.90	25.10
2	2483.5	41.37	7.37	-12.63	54.00	8.90	25.10

2.2.7 AC Power line Conducted Emission

2.2.7.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.7.2 Test limit


FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2009

2.2.7.3 Test result

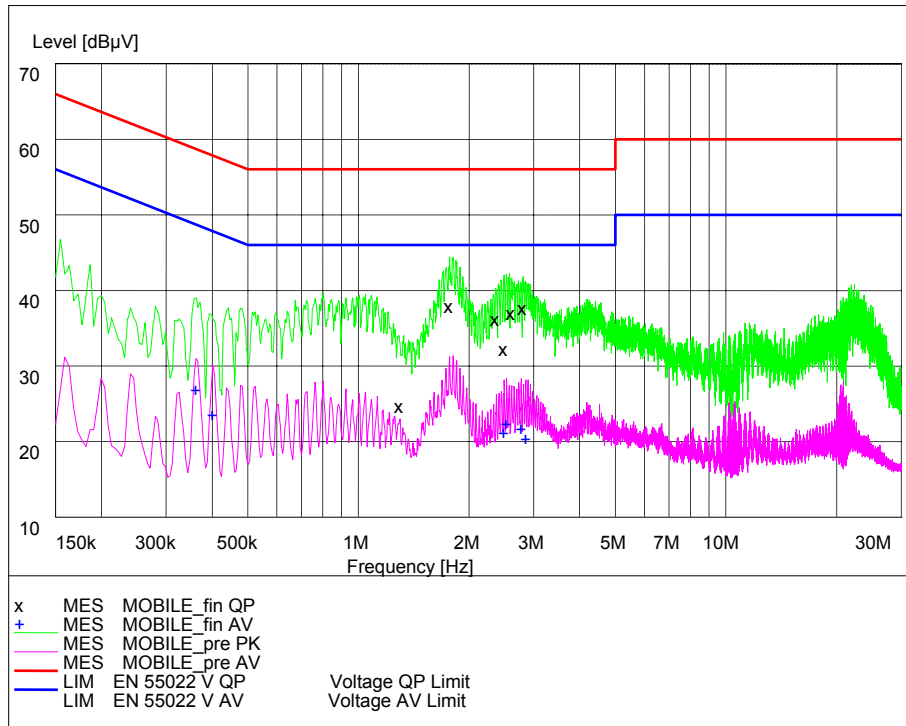

L +N Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.361000	28.30	20.2	49	20.4	N	---
0.564000	24.90	20.2	48	22.9	L1	---
2.455000	22.50	20.3	46	23.5	L1	---
2.530000	23.80	20.3	46	22.2	N	---
2.773000	23.10	20.3	46	22.9	L1	---
2.854000	21.80	20.3	46	24.2	L1	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
1.767000	39.40	20.2	56	16.6	L1	---
2.361000	37.70	20.3	56	18.3	L1	---
2.495000	33.70	20.3	56	22.3	L1	---
2.574000	33.00	20.3	56	23.0	L1	---
2.607000	38.40	20.3	56	17.6	N	---
2.806000	39.10	20.3	56	16.9	L1	---

2.3. Measurement Uncertainty

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Transmitter Power Spectral Density	0.75dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

2.4. List of test equipment

No.	Name/Model	Manufacturer	S/N	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2014.8
2.	Signal Generator MG3700A	Anritsu	6200677084	2014.8
3.	Attenuation 6810.17.B	HUBER+SUHNER	768710	2014.8
4.	Cable 104EA	SUCOFLEX	9272/4EA	2014.8
5.	Cable 104EA	SUCOFLEX	9266/4EA	2014.8
6.	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	----	----
7.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----
8.	Turn table Diameter:1m	HD	----	----
9.	Turn table Diameter:5m	HD	----	----
10.	Antenna master FAC(MA4.0)	MATURO	----	----
11.	Antenna master SAC(MA4.0)	MATURO	----	----
12.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----
13.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2014.8
14.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	2014.8
15.	HL562 Ultra log antenna	R&S	100016	2014.8
16.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2014.8
17.	ESI 40 EMI test receiver	R&S	100015	2014.8
18.	Radio tester	CMU 200	114667	2014.8
19.	ESCS30 EMI test receiver	R&S	100029	2014.8
20.	HL562 Receive antenna	R&S	100167	2014.8
21.	ESH3-Z5 LISN	R&S	100020	2014.8

Appendix

Appendix1 Test Setup