



TEST REPORT

No. I14Z48893-EMC01

for

TCT Mobile Limited

HSDPA/HSUPA/HSPA+/UMTS quad band /GSM quad band/LTE 5

band mobile phone

Model Name: 7043A

FCC ID: RAD530

with

Hardware Version: PIO

Software Version: 3H2G

Issued Date: 2015-01-15

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14Z48893-EMC01	Rev.0	1st edition	2015-01-15



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: 2014-12-27

Testing End Date: 2014-12-28


1.4. Signature



Zhang Hui
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/HSUPA/HSPA+/UMTS quad band /GSM quad band/LTE 5 band mobile phone
Model Name	7043A
FCC ID	RAD530
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT4	014243000001826	PIO	3H2G

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	Inbuilt
AE3	USB	/	1448893DC003
AE4	USB	/	/
AE5	Charger	/	1448893CH002
AE6	Charger	/	14TCT-CH-1754
AE7	Charger	/	14TCT-CH-1775
AE8	Charger	/	1448893CH004

AE1

Model	CAC2500007C1
Manufacturer	BYD
Capacitance	2500mAh
Nominal voltage	3.8V

AE3

Model	CDA3122002C2
Manufacturer	Shenghua
Length of cable	99cm

AE4

Model	CDA3122002C1
Manufacturer	Jiuwei
Length of cable	/



AE5、AE6、AE7

Model	CBA3000AG0C2
Manufacturer	BYD
Length of cable	/

AE8

Model	CBA3000AG0C1
Manufacturer	TEN PAO
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT7+ AE1+ AE3 + AE5	Charger
Set.2	EUT7+ AE1+ AE3 + AE8	Charger
Set.3	EUT7+ AE1+ AE3	USB模式



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-13 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	Section 5	B.1	P	A
2	Conducted Emission	15.107(a)	Section 5	B.2	P	A



7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESCI	100344	R&S	2015-03-03	1 year
2	Test Receiver	ESCI 7	100948	R&S	2015-07-16	1 year
3	Universal Radio Communication Tester	CMU200	109914	R&S	2015-04-13	1 year
4	Test Receiver	FSV	101047	R&S	2015-07-03	1 year
5	LISN	ENV216	101200	R&S	2015-07-07	1 year
6	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15	3 years
7	EMI Antenna	3115	6914	ETS-Lindgren	2016-12-15	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
11	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17875.688	49.5	-18.5	45.6	22.400	VERTICAL
17872.500	49.2	-18.5	45.6	22.100	VERTICAL
17878.875	49.2	-18.5	45.6	22.100	VERTICAL
17882.063	49.2	-18.5	45.6	22.100	HORIZONTAL
17893.750	49.1	-18.5	45.6	22.000	VERTICAL
17883.125	49.1	-18.5	45.6	22.000	VERTICAL

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17890.563	60.7	-18.5	45.6	33.600	VERTICAL
17920.313	60.4	-17.7	45.6	32.500	VERTICAL
17924.563	60.4	-17.7	45.6	32.500	HORIZONTAL
17923.500	60.3	-17.7	45.6	32.400	VERTICAL
17941.563	60.3	-17.7	45.6	32.400	HORIZONTAL
17967.063	60.2	-17.7	45.6	32.300	HORIZONTAL

Measurement results for Set.2:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17879.938	49.1	-18.5	45.6	22.000	HORIZONTAL
17892.688	48.9	-18.5	45.6	21.800	HORIZONTAL
17898.000	48.9	-18.5	45.6	21.800	VERTICAL
17867.188	48.9	-18.5	45.6	21.800	HORIZONTAL
17871.438	48.8	-18.5	45.6	21.700	HORIZONTAL
17894.813	48.8	-18.5	45.6	21.700	HORIZONTAL

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17875.688	60.9	-18.5	45.6	33.800	HORIZONTAL
17896.938	60.8	-18.5	45.6	33.700	VERTICAL
17884.188	60.8	-18.5	45.6	33.700	VERTICAL
17997.875	60.6	-17.7	45.6	32.700	VERTICAL
17890.563	60.3	-18.5	45.6	33.200	HORIZONTAL
17977.688	60.3	-17.7	45.6	32.400	VERTICAL

Measurement result for Set.3:

USB Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17892.688	49.1	-18.5	45.6	22.000	HORIZONTAL
17888.438	49.1	-18.5	45.6	22.000	HORIZONTAL
17895.875	49.1	-18.5	45.6	22.000	VERTICAL
17881.000	49.1	-18.5	45.6	22.000	VERTICAL
17889.500	49.0	-18.5	45.6	21.900	VERTICAL
17900.125	49.0	-18.5	45.6	21.900	VERTICAL

USB Mode/ Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17917.125	61.2	-17.7	45.6	33.300	VERTICAL
17873.563	61.1	-18.5	45.6	34.000	HORIZONTAL
17935.188	61.1	-17.7	45.6	33.200	HORIZONTAL
17908.625	61.0	-18.5	45.6	33.900	VERTICAL
17856.563	60.9	-18.5	45.6	33.800	VERTICAL
17902.250	60.8	-18.5	45.6	33.700	VERTICAL

Note: The measurement results of Set.1, Set.2, Set.3 showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.1

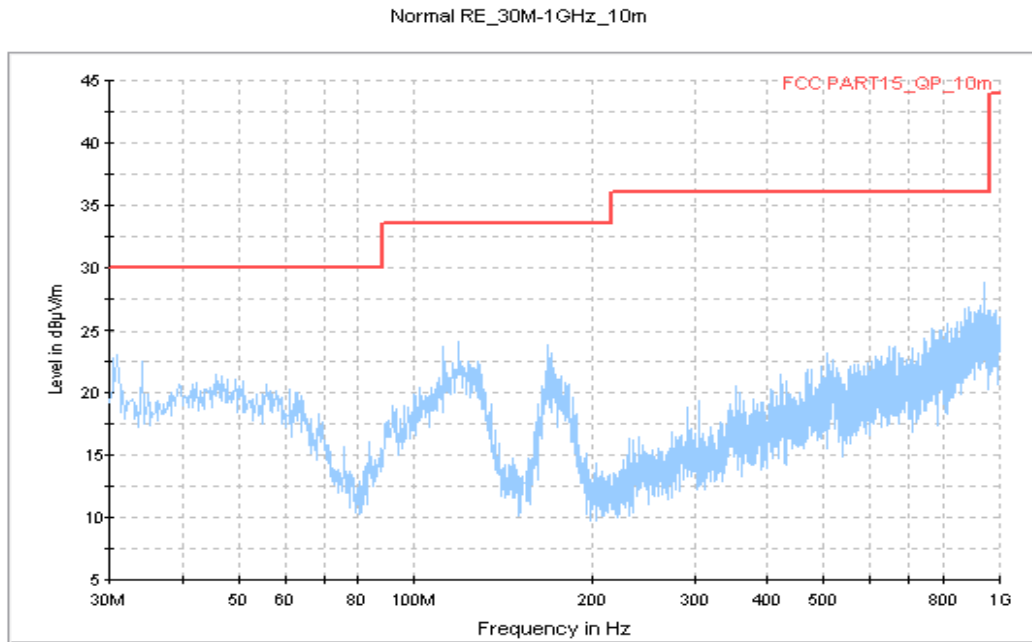


Figure A.1 Radiated Emission from 30MHz to 1GHz

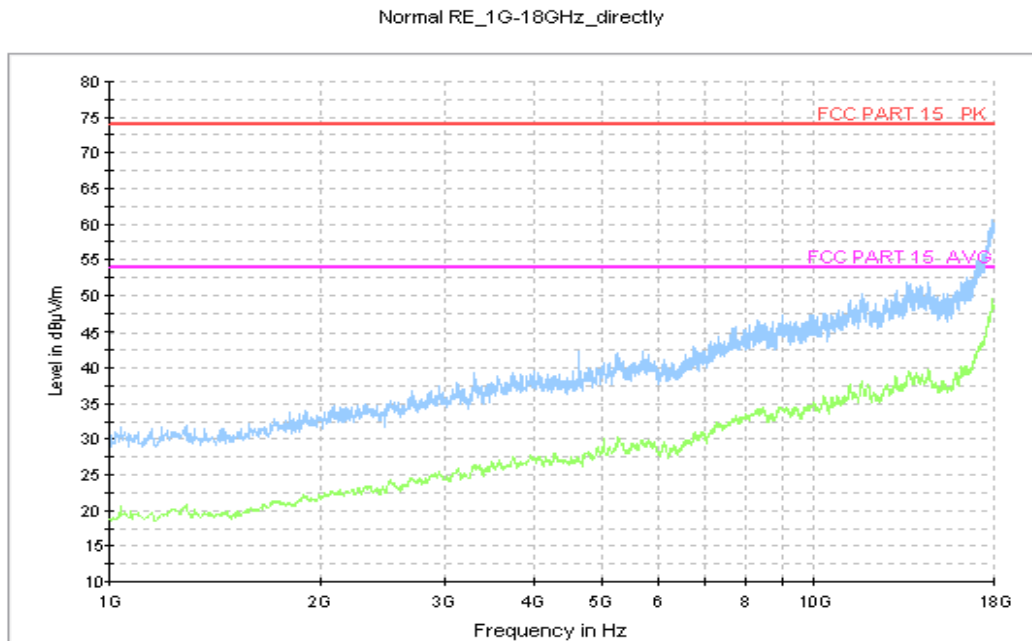


Figure A.2 Radiated Emission from 1GHz to 18GHz

Charging Mode, Set.2

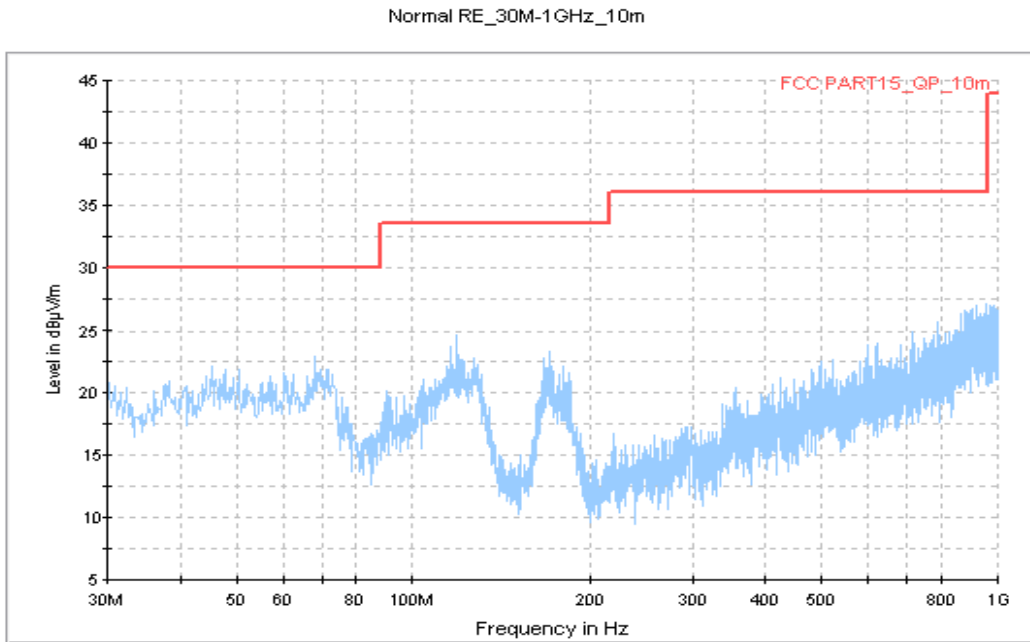


Figure A.3 Radiated Emission from 30MHz to 1GHz

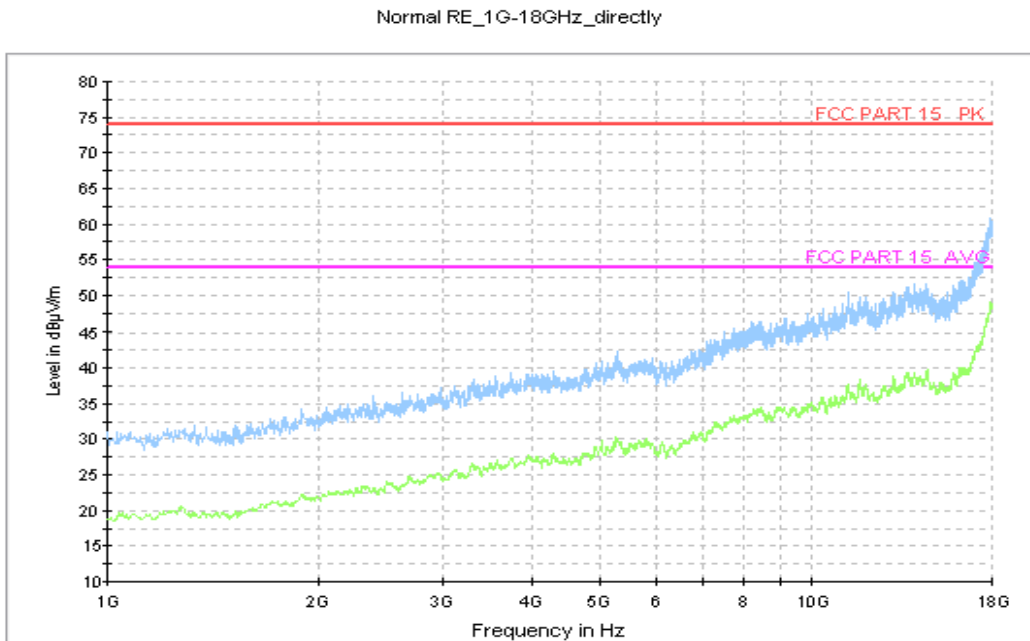


Figure A.4 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.3

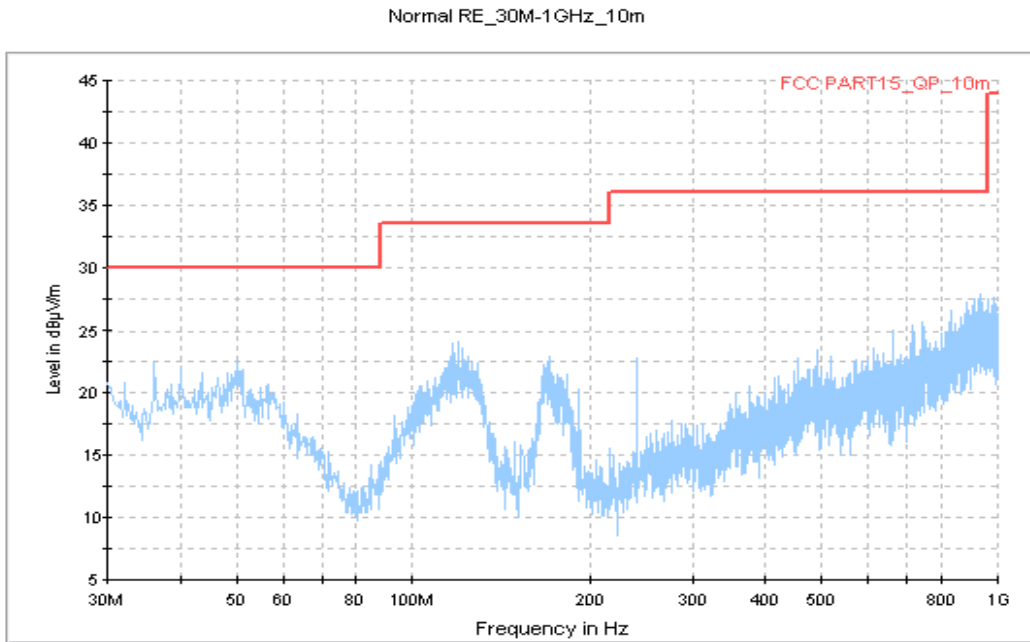


Figure A.5 Radiated Emission from 30MHz to 1GHz

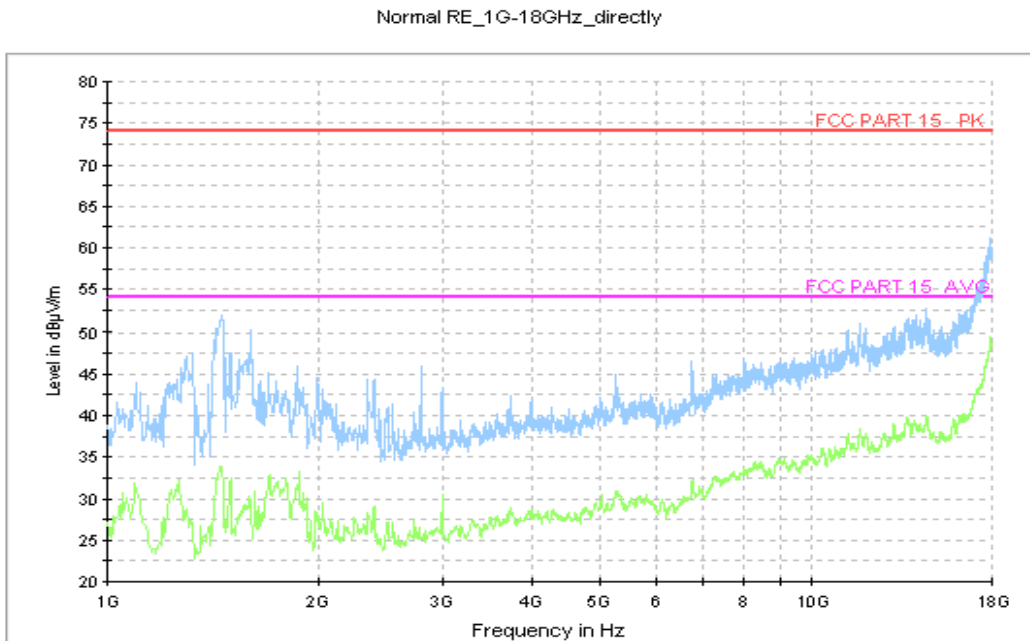


Figure A.6 Radiated Emission from 1GHz to18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 2.9 \text{ dB}$, $k=2$.

Charging Mode, Set.1

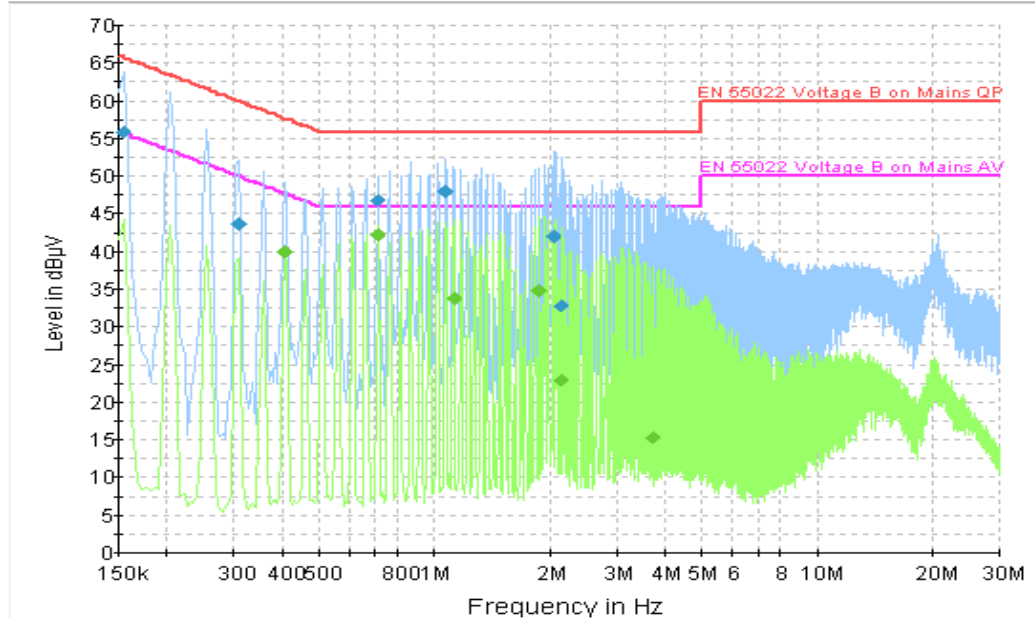


Figure A.7 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	56.0	2000.0	9.000	On	L1	19.7	9.8	65.8
0.307500	43.7	2000.0	9.000	On	L1	19.9	16.3	60.0
0.712500	46.9	2000.0	9.000	On	L1	19.9	9.1	56.0
1.068000	48.1	2000.0	9.000	On	N	19.8	7.9	56.0
2.035500	42.1	2000.0	9.000	On	N	19.7	13.9	56.0
2.139000	32.9	2000.0	9.000	On	L1	19.7	23.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.406500	40.0	2000.0	9.000	On	N	20.0	7.7	47.7
0.712500	42.3	2000.0	9.000	On	L1	19.9	3.7	46.0
1.122000	33.8	2000.0	9.000	On	L1	19.8	12.2	46.0
1.882500	34.8	2000.0	9.000	On	L1	19.7	11.2	46.0
2.139000	22.9	2000.0	9.000	On	L1	19.7	23.1	46.0
3.714000	15.4	2000.0	9.000	On	L1	19.7	30.6	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.2

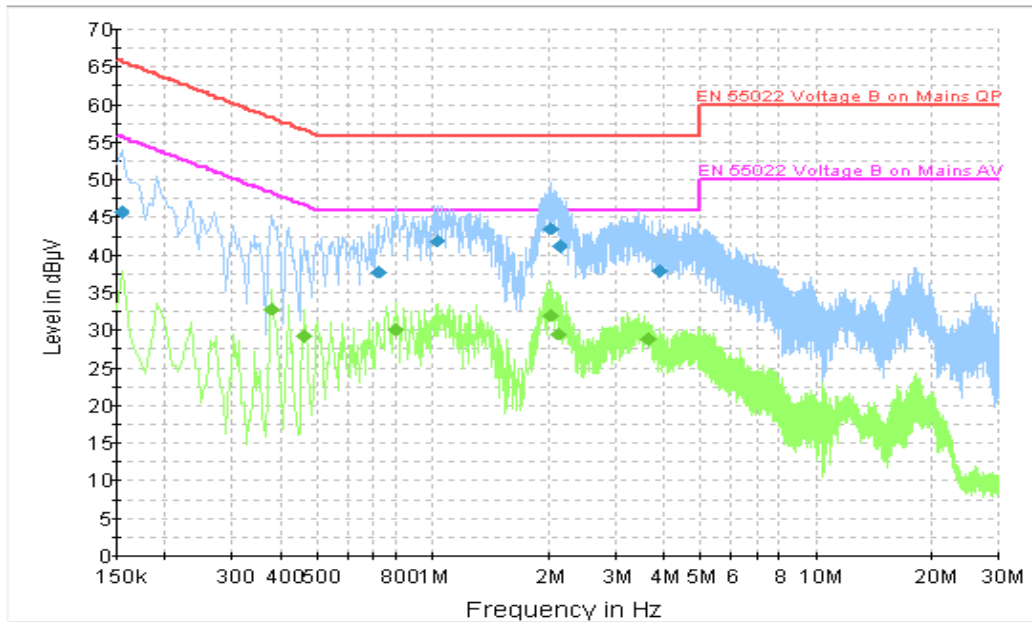


Figure A.8 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154500	45.7	2000.0	9.000	On	L1	19.7	20.1	65.8
0.721500	37.8	2000.0	9.000	On	L1	19.9	18.2	56.0
1.023000	41.9	2000.0	9.000	On	L1	19.7	14.1	56.0
2.017500	43.6	2000.0	9.000	On	L1	19.7	12.4	56.0
2.139000	41.2	2000.0	9.000	On	L1	19.7	14.8	56.0
3.930000	38.0	2000.0	9.000	On	L1	19.7	18.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.379500	32.8	2000.0	9.000	On	L1	19.9	15.5	48.3
0.460500	29.2	2000.0	9.000	On	L1	20.0	17.5	46.7
0.798000	30.1	2000.0	9.000	On	L1	19.9	15.9	46.0
2.017500	32.1	2000.0	9.000	On	L1	19.7	13.9	46.0
2.130000	29.5	2000.0	9.000	On	L1	19.7	16.5	46.0
3.651000	28.8	2000.0	9.000	On	L1	19.7	17.2	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.3

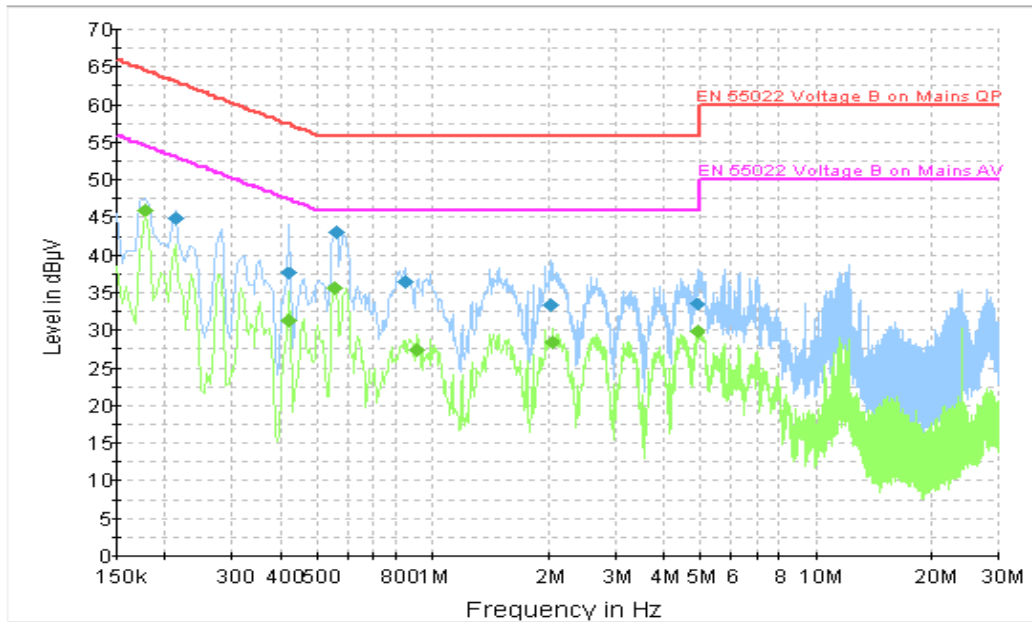


Figure A.9 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.213000	44.9	2000.0	9.000	On	N	19.9	18.2	63.1
0.420000	37.6	2000.0	9.000	On	L1	20.0	19.8	57.4
0.559500	43.0	2000.0	9.000	On	L1	20.0	13.0	56.0
0.843000	36.4	2000.0	9.000	On	N	19.9	19.6	56.0
2.031000	33.3	2000.0	9.000	On	L1	19.7	22.7	56.0
4.920000	33.5	2000.0	9.000	On	L1	19.7	22.5	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	46.0	2000.0	9.000	On	N	19.9	8.6	54.6
0.420000	31.4	2000.0	9.000	On	L1	20.0	16.0	47.4
0.555000	35.7	2000.0	9.000	On	N	20.0	10.4	46.0
0.910500	27.3	2000.0	9.000	On	L1	19.8	18.7	46.0
2.040000	28.4	2000.0	9.000	On	N	19.7	17.6	46.0
4.915500	30.0	2000.0	9.000	On	N	19.7	16.0	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

END OF REPORT