



**FCC PART 15C  
TESTREPORT  
No. I15Z40307-SRD01**

**for**

**TCT Mobile Limited**

**HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone**

**MODEL NAME: A460G**

**with**

**FCC ID: RAD540**

**Hardware Version: HVN04**

**Software Version: v4A59**

**Issued Date: 2015-03-27**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:[cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website:[www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I15Z40307-SRD01	Rev.0	1st edition	2015-03-27



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
<b>1.1. TESTING LOCATION .....</b>	<b>5</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>6</b>
<b>1.3. PROJECT DATA .....</b>	<b>6</b>
<b>1.4. SIGNATURE.....</b>	<b>6</b>
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>7</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>7</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
<b>3.1. ABOUT EUT.....</b>	<b>8</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT .....</b>	<b>8</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE.....</b>	<b>8</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>9</b>
<b>3.5. INTERPRETATION OF THE TEST ENVIRONMENT .....</b>	<b>9</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>9</b>
<b>4.1. DOCUMENTS SUPPLIED BY APPLICANT.....</b>	<b>9</b>
<b>4.2. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>9</b>
<b>5. TEST RESULTS.....</b>	<b>10</b>
<b>5.1. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>5.2. STATEMENTS.....</b>	<b>10</b>
<b>5.3. TEST CONDITIONS.....</b>	<b>10</b>
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>12</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>12</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>13</b>
<b>A.2.1. PEAK OUTPUT POWER-CONDUCTED .....</b>	<b>13</b>
<b>A.2.2. AVERAGE OUTPUT POWER-CONDUCTED.....</b>	<b>14</b>
<b>A.3. PEAK POWER SPECTRAL DENSITY .....</b>	<b>16</b>
<b>A.4. DTS 6-DB SIGNAL BANDWIDTH .....</b>	<b>24</b>
<b>A.5. BAND EDGES COMPLIANCE .....</b>	<b>31</b>
<b>A.6. TRANSMITTER SPURIOUS EMISSION .....</b>	<b>36</b>



A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED .....	36
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED .....	89
<b>A.7. AC POWER-LINE CONDUCTED EMISSION.....</b>	<b>116</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>121</b>



## **1. Test Laboratory**

### **1.1. Testing Location**

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China100191


## 1.2. Testing Environment

Normal Temperature: 15-35°C  
Extreme Temperature: -20/+55°C  
Relative Humidity: 20-75%

## 1.3. Project data


Testing Start Date: 2015-02-09  
Testing End Date: 2015-03-27

## 1.4. Signature




---

Xu Zhongfei  
(Prepared this test report)



---

Li Zhibin  
(Reviewed this test report)



---

Lv Songdong  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-51798260  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-51798260  
Fax: 0086-21-61460602



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone
Model name	A460G
FCC ID	RAD540
IC ID	/
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	25.01dBm(OFDM)
Power Supply	3.8V DC by Battery

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
UT01a	014350000000631	HVN04	v4A59
UT02a	014350000000516	HVN04	v4A59

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>
AE1	Battery	---
AE2	Charger	---
AE3	Charger	---

##### AE1

Commercial name	Battery
Type	CAB1400002C2
Manufacturer	/
Length of cable	/

##### AE2

Commercial name	Charger
Type	CBA3002AG0C3
Manufacturer	/
Length of cable	/



AE2

Commercial name	Charger
Type	CBA0066AG0C1
Manufacturer	/
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment under Test (EUT) is a model of HSUPA/HSDPA/UMTS triband/GSM quadband mobile phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable and Phone.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### **3.5. Interpretation of the Test Environment**

For the test methods, the test environment uncertainty figures correspond to an expansion factor k=2.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2014
	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB558074 v03r01	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247	2013

## 5. Test Results

### 5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	<b>P</b>
Peak Power Spectral Density	15.247 (e)	/	<b>P</b>
Occupied 6dB Bandwidth	15.247 (a)	/	<b>P</b>
Band Edges Compliance	15.247 (d)	/	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	/	<b>P</b>
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	/	<b>P</b>

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard
F	Fail, The EUT does not comply with the essential requirements in the standard

### 5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

### 5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.8V(By battery)
Humidity	H nom	44%

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2014-07-08	2015-07-07
2	Test Receiver	ESS	847151/015	Rohde & Schwarz	2014-11-29	2015-11-28
3	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-4-15	2015-4-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2014-11-6	2015-11-5
2	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	2012-11-11	2015-11-10
3	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS-Lindgren	2014-4-20	2017-04-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2014-7-1	2017-06-30
5	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2012-12-21	2015-12-20
6	Semi-anechoic chamber	/	CT000332-1074	Frankonia German	/	/

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

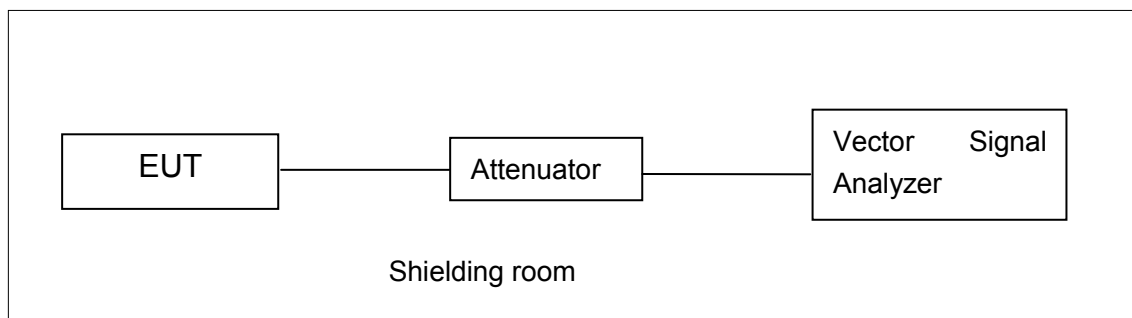


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

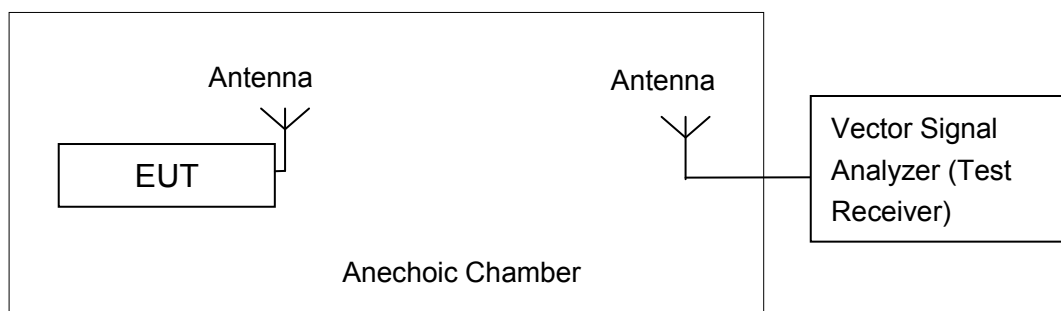


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

## **A.2. Maximum Output Power**

**Method of Measurement: See ANSI C63.10-2009-clause 6.10**

- a) Set span to encompass the entire EBW of the signal.
- b) Set RBW = 1 MHz
- c) Set VBW =3 MHz
- d) Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise, use peak detector mode
- e) Use a video trigger with the trigger level set to enable triggering only on full power pulses.  
Unlicensed wireless device must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run.” Power-gated sweeping may be used to ensure the analyzer sweeps only while the device is transmitting.
- f) Trace average across 100 traces in power averaging mode.
- g) Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**EUT ID: EUT2**

### **A.2.1. Peak Output Power-conducted**

**Measurement Results:**

**802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.19	/	/
	2	20.44	/	/
	5.5	21.78	/	/
	11	23.32	23.47	23.52
802.11g	6	23.68	/	/
	9	23.79	/	/
	12	23.53	/	/
	18	23.25	/	/
	24	23.76	/	/
	36	23.80	25.01	24.28
	48	23.61	/	/
	54	23.62	/	/

The data rate 11Mbps and 36Mbps are selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	23.75	/	/
	MCS1	23.24	/	/
	MCS2	23.21	/	/
	MCS3	23.80	23.65	24.27
	MCS4	23.75	/	/
	MCS5	23.54	/	/
	MCS6	23.56	/	/
	MCS7	23.63	/	/

The data rate MCS3 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	20.33	20.58	20.77
	MCS1	20.14	/	/
	MCS2	20.13	/	/
	MCS3	20.27	/	/
	MCS4	20.27	/	/
	MCS5	20.31	/	/
	MCS6	20.20	/	/
	MCS7	20.14	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**Conclusion: Pass**

**A.2.2. Average Output Power-conducted**

**802.11b/g mode**

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	16.57	16.73	16.99
802.11g	14.63	15.68	14.91



**802.11n-HT20 mode**

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	14.64	14.59	14.86

**802.11n-HT40 mode**

Mode	Test Result (dBm)		
	2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n(40MHz)	10.84	11.09	11.23

**Conclusion: Pass**



### **A.3. Peak Power Spectral Density**

#### **Method of Measurement: See ANSI C63.10-2009-clause 6.11.2.4**

The measurement procedure shall be as follows:

Connect the antenna port to be measured through the 20 dB pad to the spectrum analyzer input. Configure the spectrum analyzer as described below (all losses between the unlicensed wireless device output and the spectrum analyzer, such as attenuator value, cable losses and other offsets shall be recorded). Locate and zoom in on emission peak(s) within the passband.

- a) Set RBW = 3 kHz
- b) Set VBW ≤ 9 kHz
- c) Set Sweep time to Automatic
- d) Use a peak detector. A sample detector mode can be used only if the following conditions can be achieved with automatic sweep time and adjusting the bin width.
  - 1) Bin width (i.e., span/number of points in spectrum display) < 0.5 RBW.
  - 2) The transmission pulse or sequence of pulses remains at maximum transmit power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
- e) Use a video trigger (or RF gating) with the trigger level set to enable the sweep only during full power pulses. Transmitter shall operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run.”
- f) Trace average 100 traces in power averaging mode. Do not use video averaging mode.

NOTE—Some analyzers will automatically select sample mode when trace averaging is selected. If a peak detector is used, then peak detector must be manually selected when trace averaging is enabled.

#### **Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

#### **Measurement Results:**

##### **802.11b/g mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11b	1	Fig.A.3.1	-7.1	<b>P</b>
	6	Fig.A.3.2	0.23	<b>P</b>
	11	Fig.A.3.3	-6.92	<b>P</b>
802.11g	1	Fig.A.3.4	-11.42	<b>P</b>
	6	Fig.A.3.5	-7.64	<b>P</b>
	11	Fig.A.3.6	-10.07	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Power Spectral Density	Conclusion
------	---------	------------------------	------------




		( dBm/3 kHz )		
802.11n (HT20)	1	Fig.A.3.7	-9.80	<b>P</b>
	6	Fig.A.3.8	-9.89	<b>P</b>
	11	Fig.A.3.9	-10.57	<b>P</b>

**802.11n-HT40 mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT40)	3	Fig.A.3.10	-17.69	<b>P</b>
	6	Fig.A.3.11	-17.19	<b>P</b>
	9	Fig.A.3.12	-16.57	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**

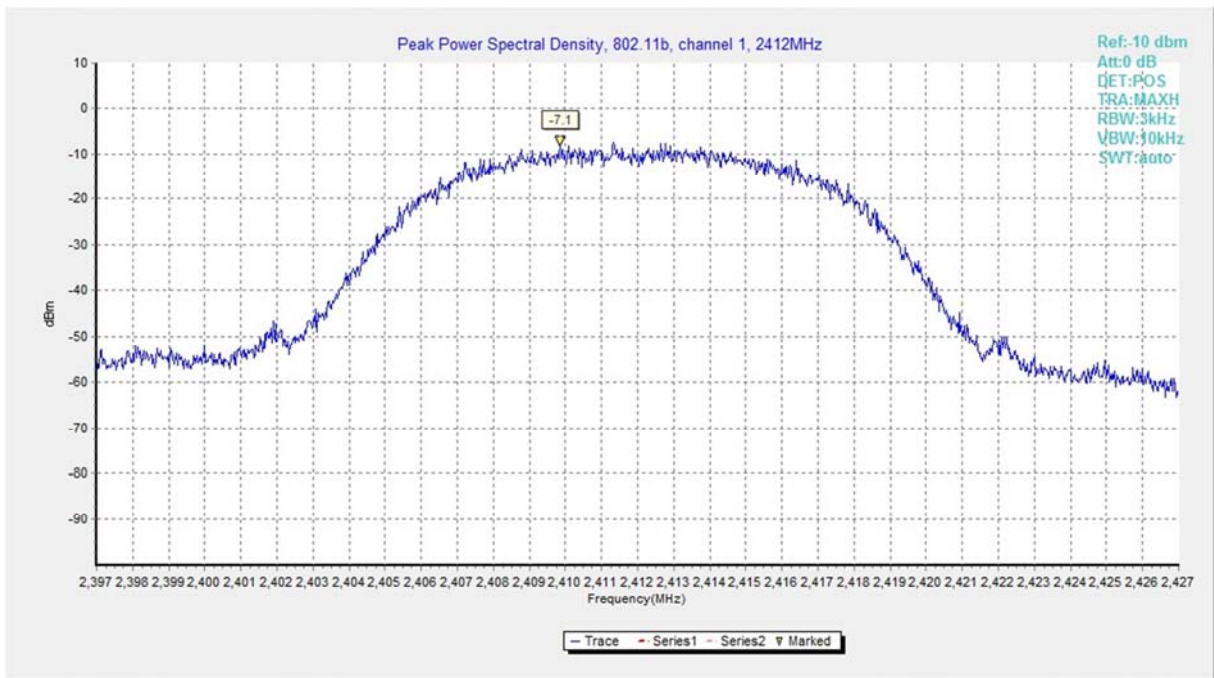

**Fig.A.3.1 Power Spectral Density(802.11b,Ch1)**

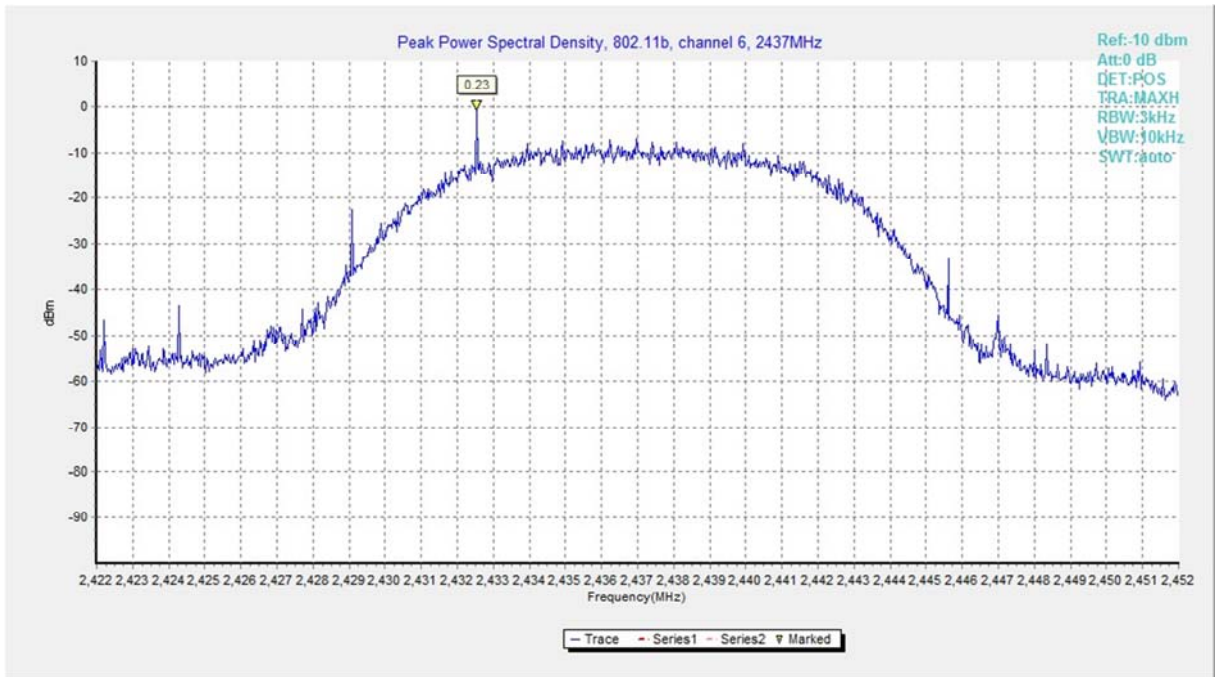


Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)



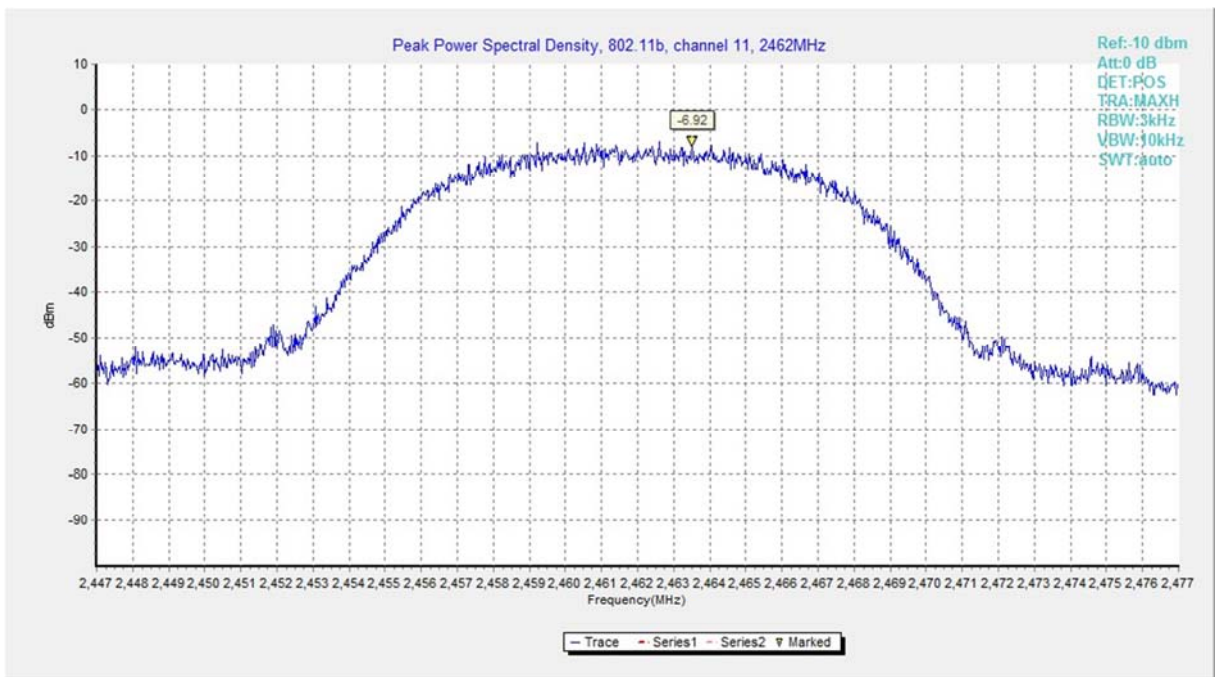


Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)

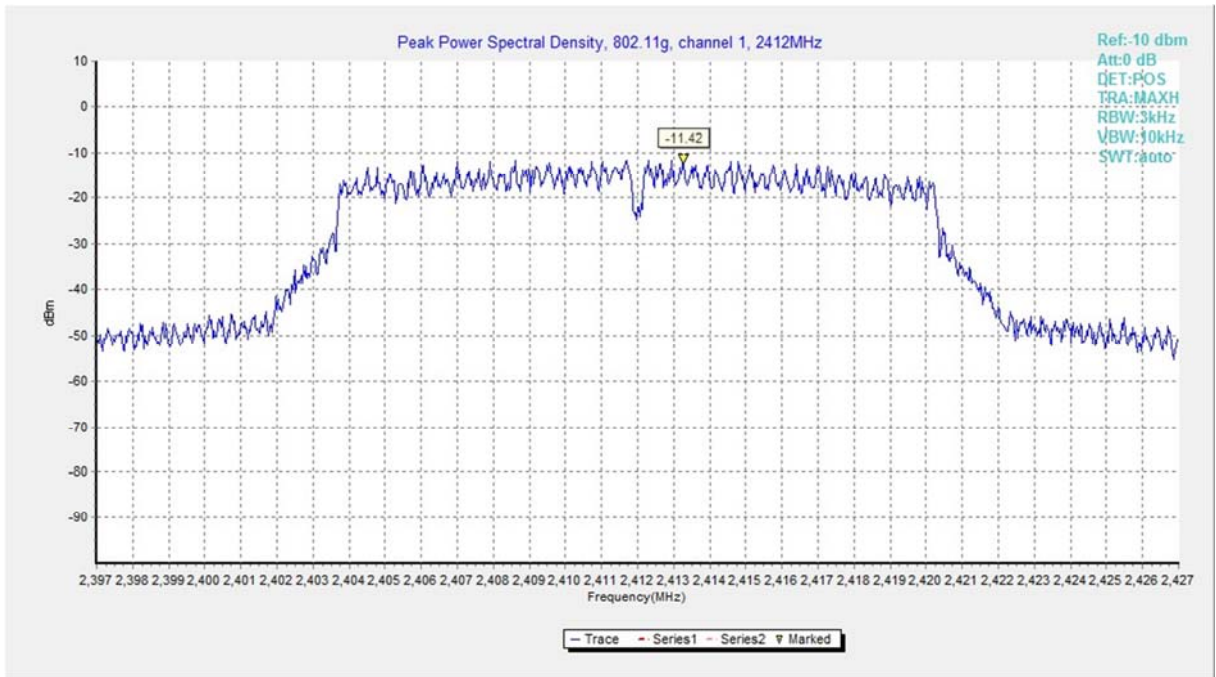

**Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)**

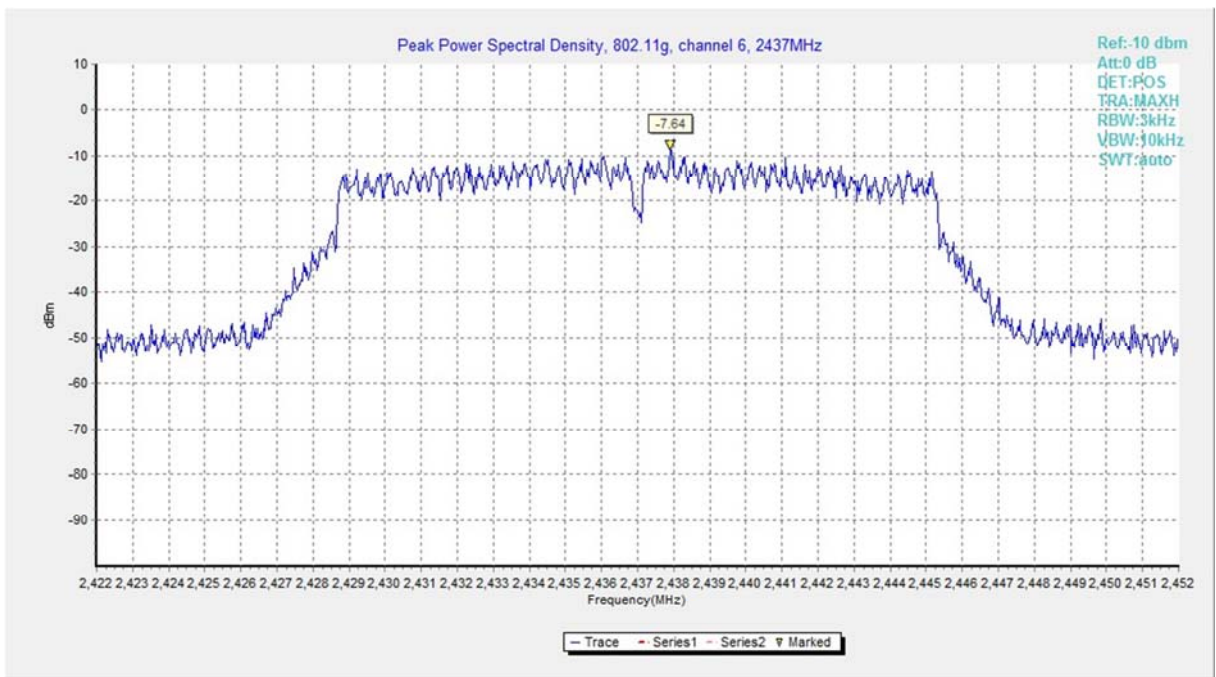

**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**



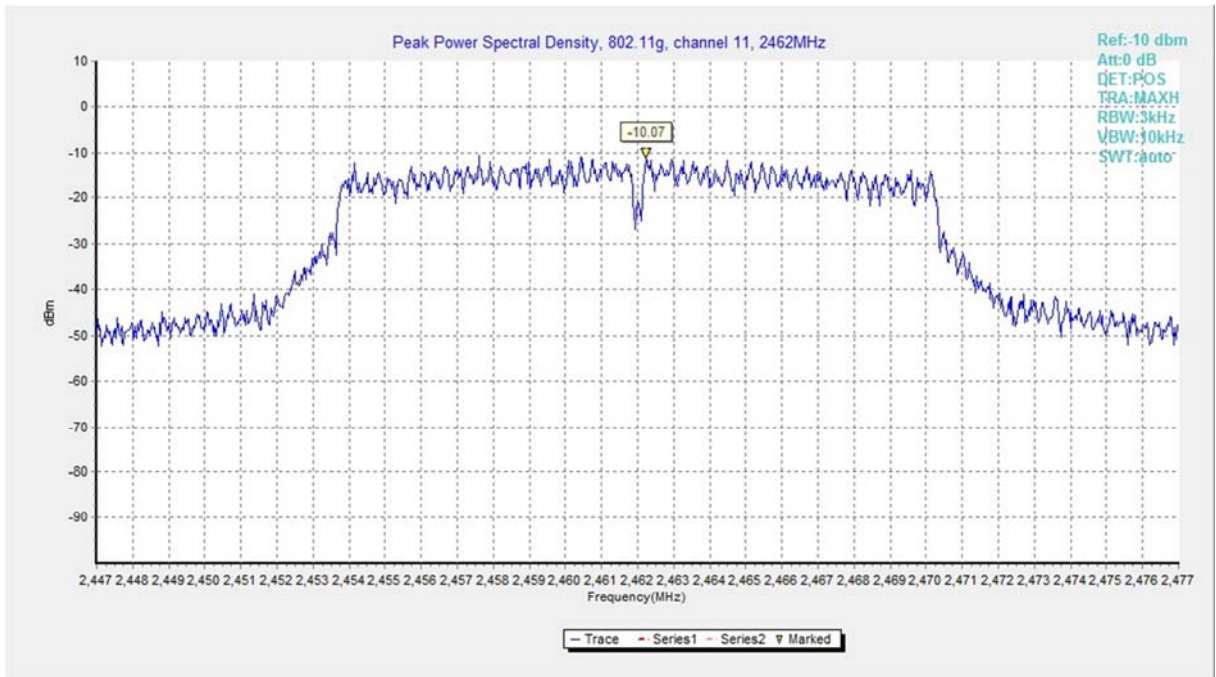


Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)



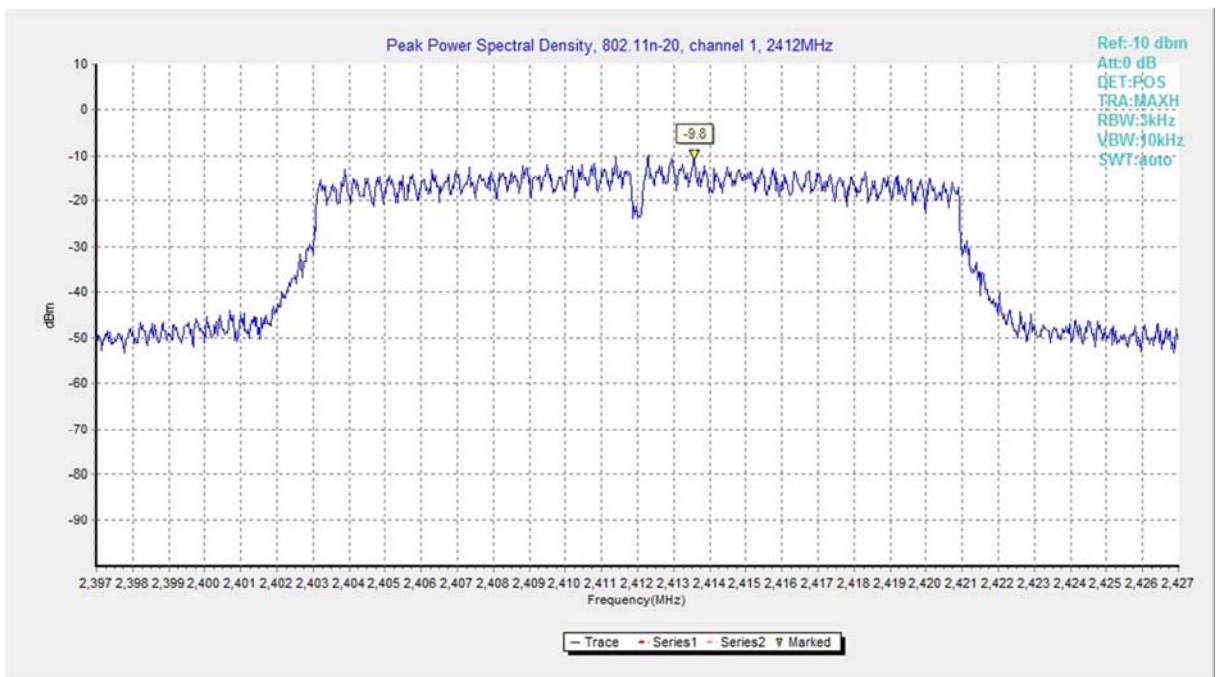


Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)

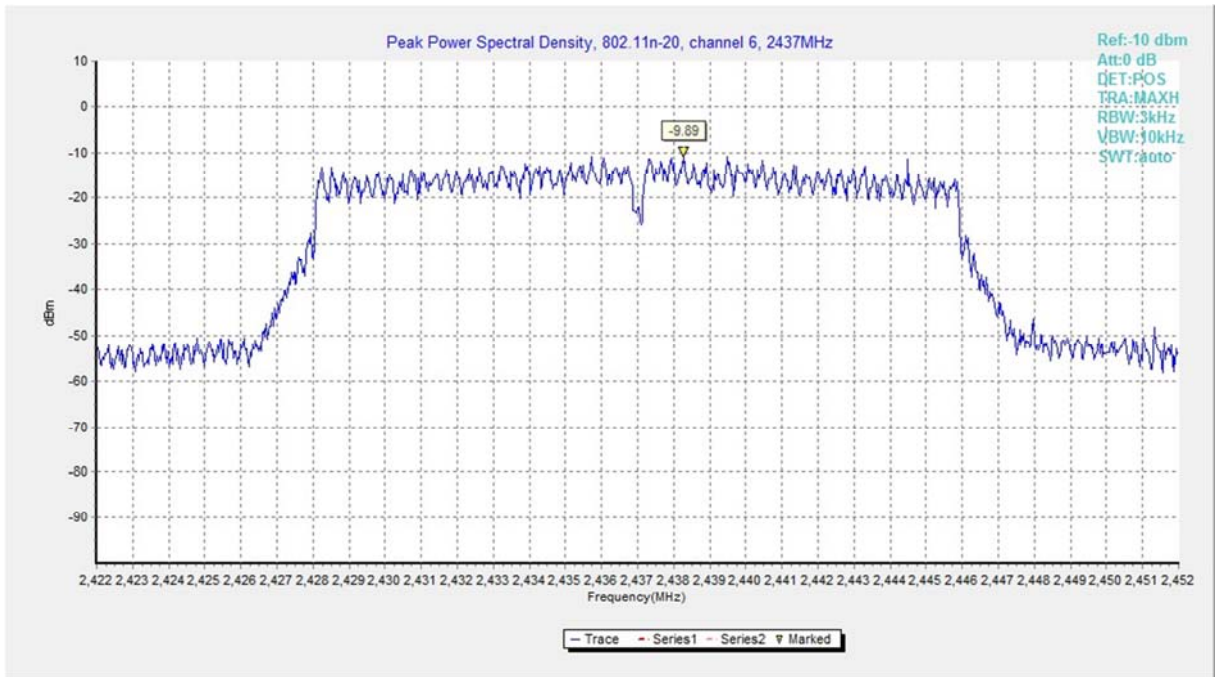

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

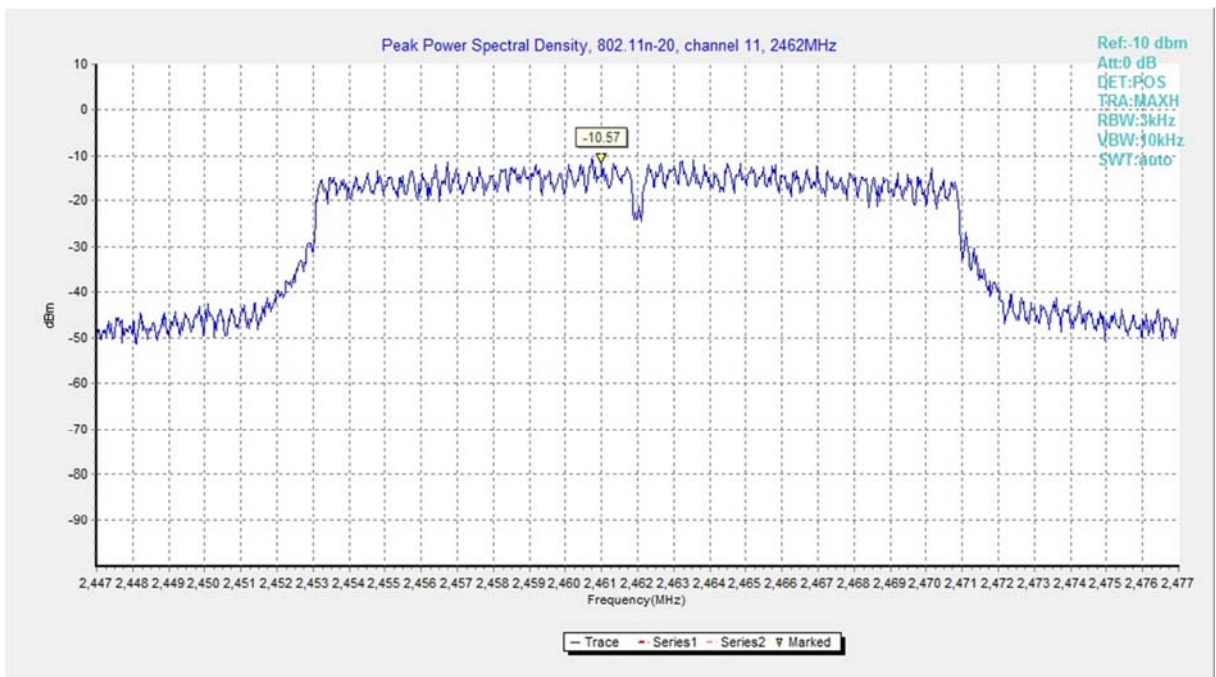

**Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)**

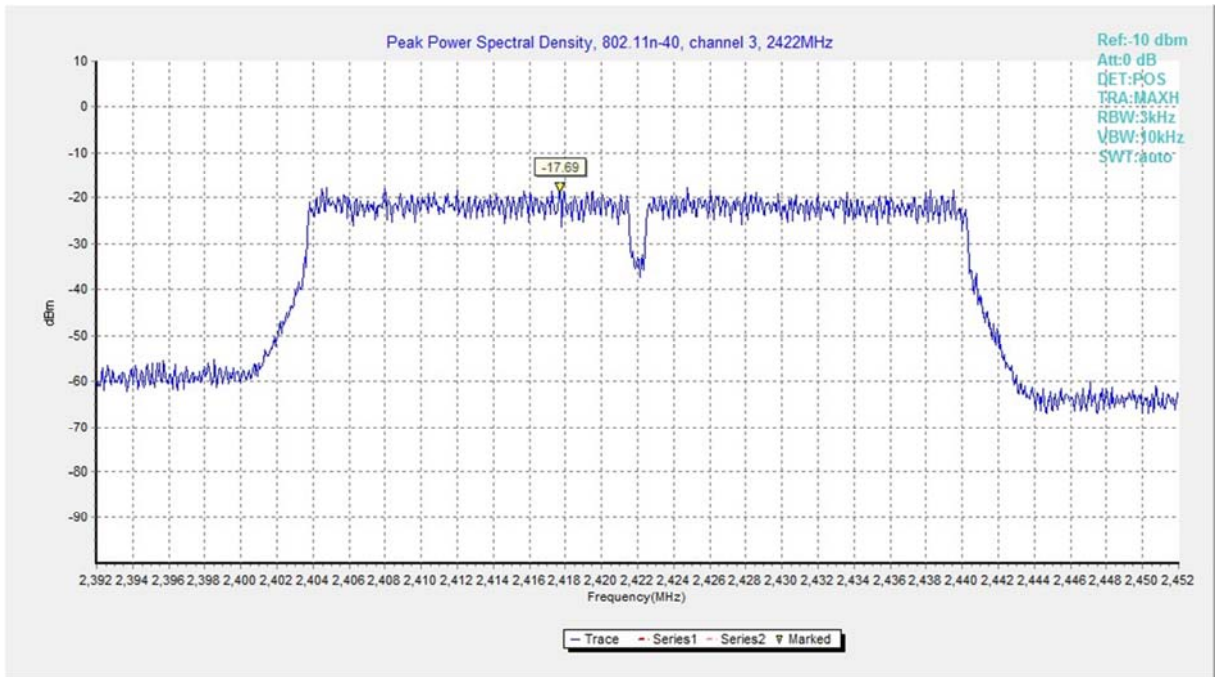


Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)

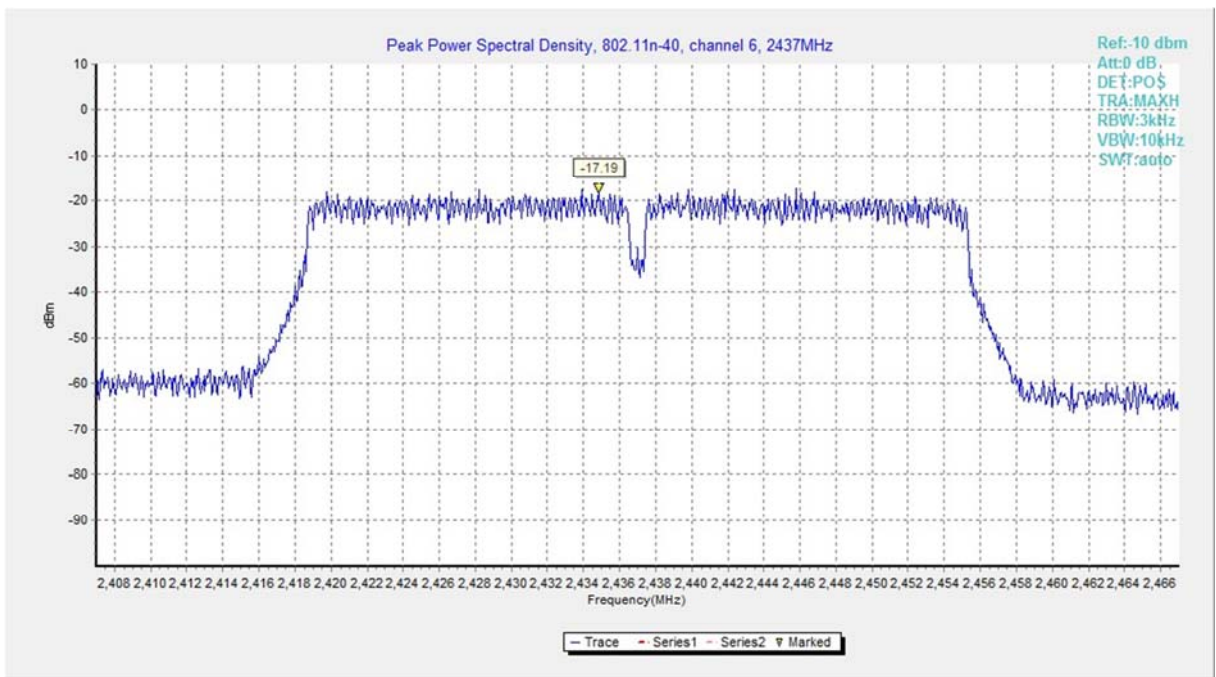


Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)



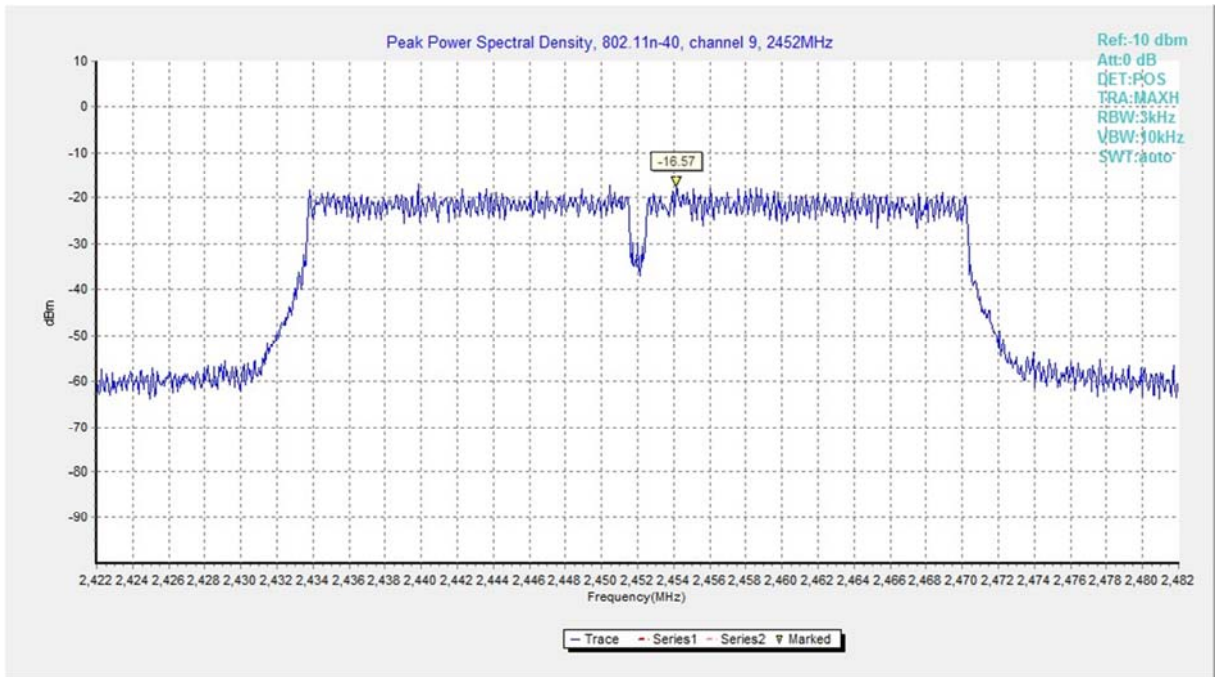


Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See KDB558074 section 8.1 (Option 1).**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: EUT2**

**Measurement Result:**

##### **802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.A.4.1	9150	<b>P</b>
	6	Fig.A.4.2	9350	<b>P</b>
	11	Fig.A.4.3	9650	<b>P</b>
802.11g	1	Fig.A.4.4	16250	<b>P</b>
	6	Fig.A.4.5	16350	<b>P</b>
	11	Fig.A.4.6	16300	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17200	<b>P</b>
	6	Fig.A.4.8	17200	<b>P</b>
	11	Fig.A.4.9	16900	<b>P</b>

##### **802.11n-HT40 mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (HT40)	3	Fig.A.4.10	36080	<b>P</b>
	6	Fig.A.4.11	35840	<b>P</b>
	9	Fig.A.4.12	36320	<b>P</b>

**Conclusion: Pass**



Test graphs as below:

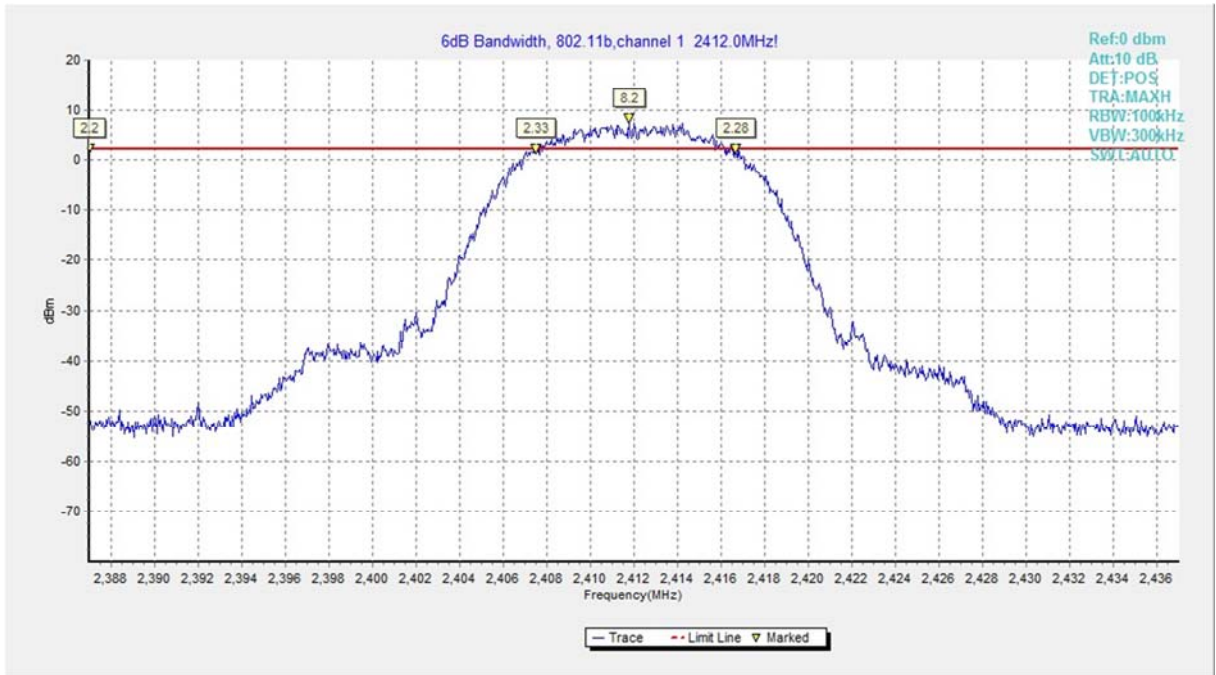


Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)

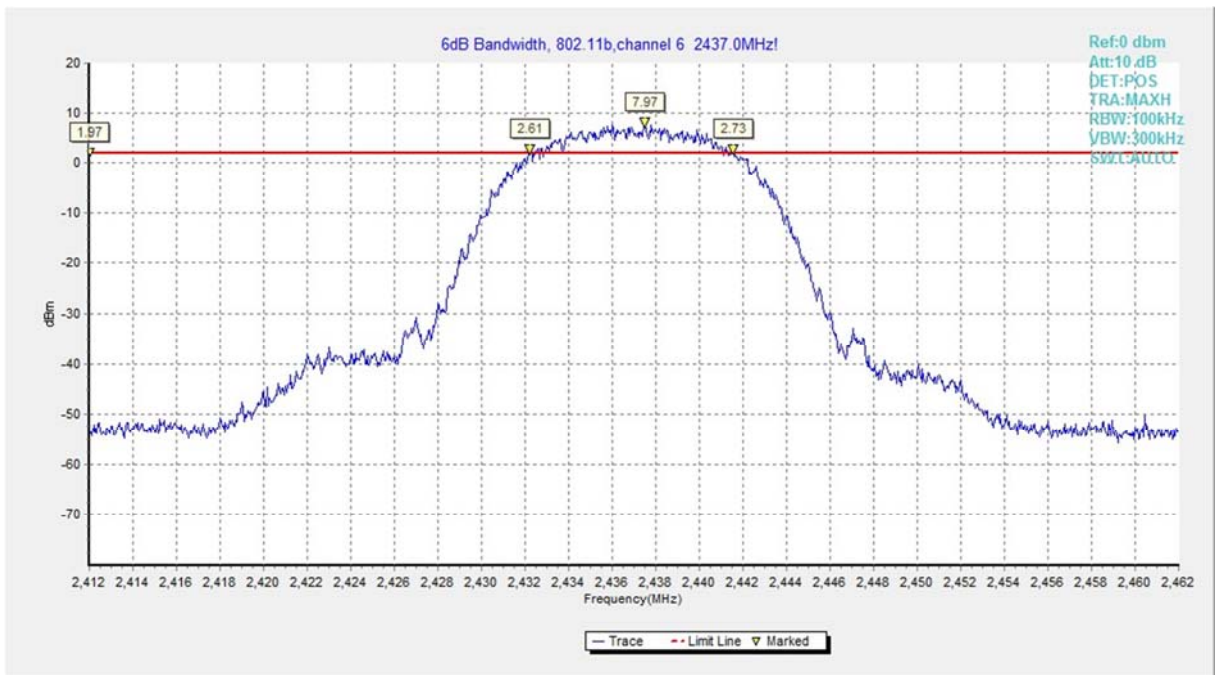


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)



Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)

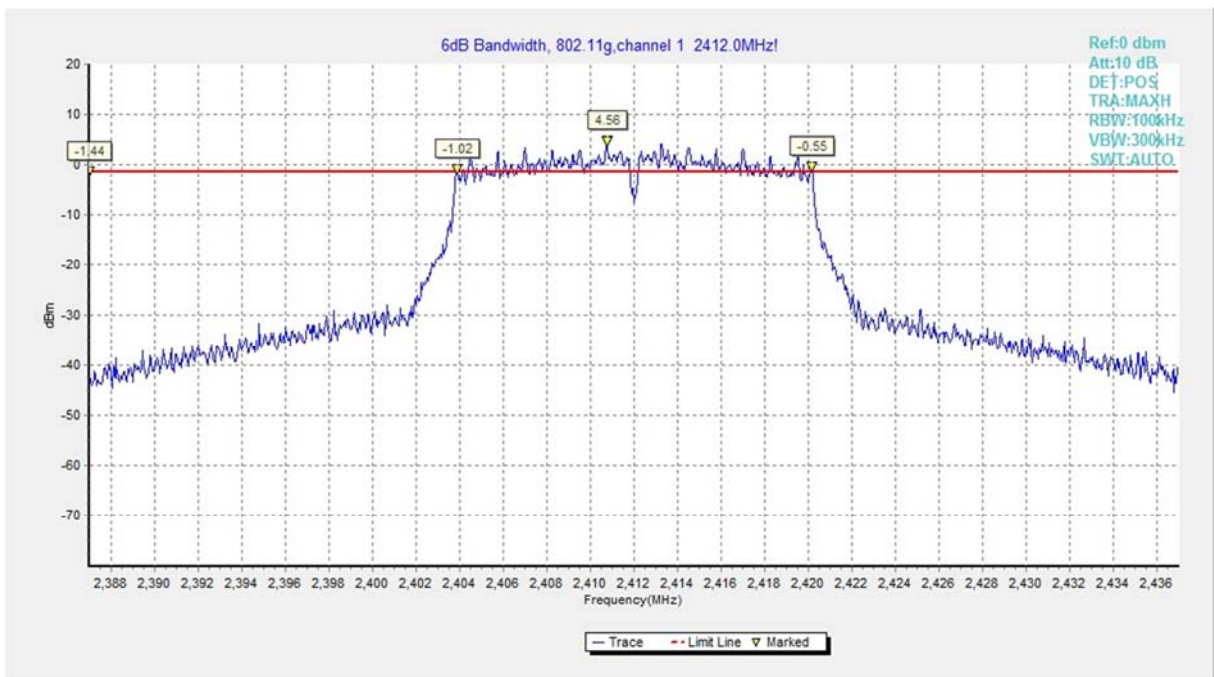


Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)

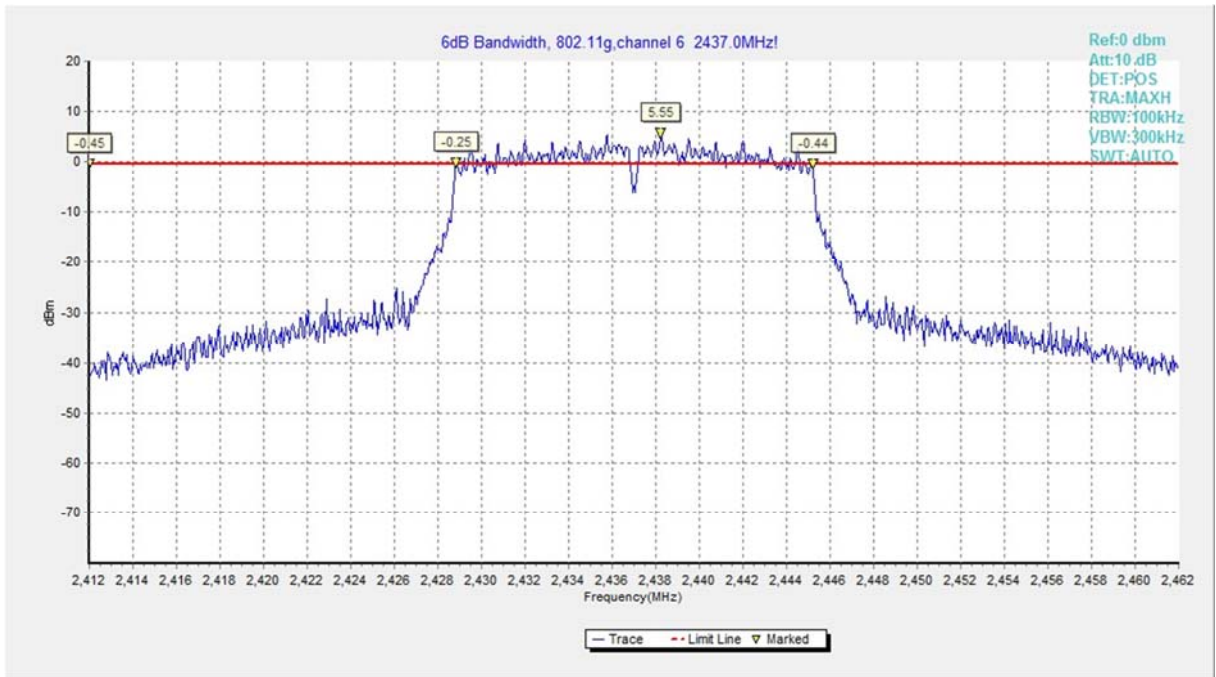


Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)

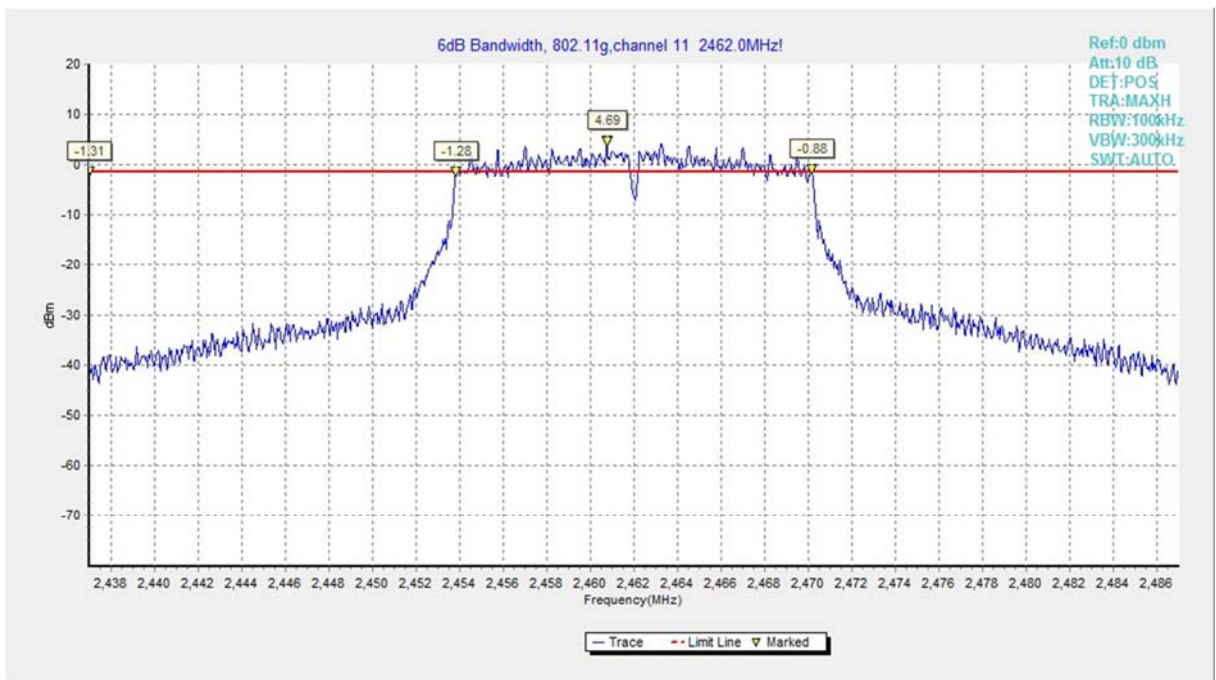


Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)



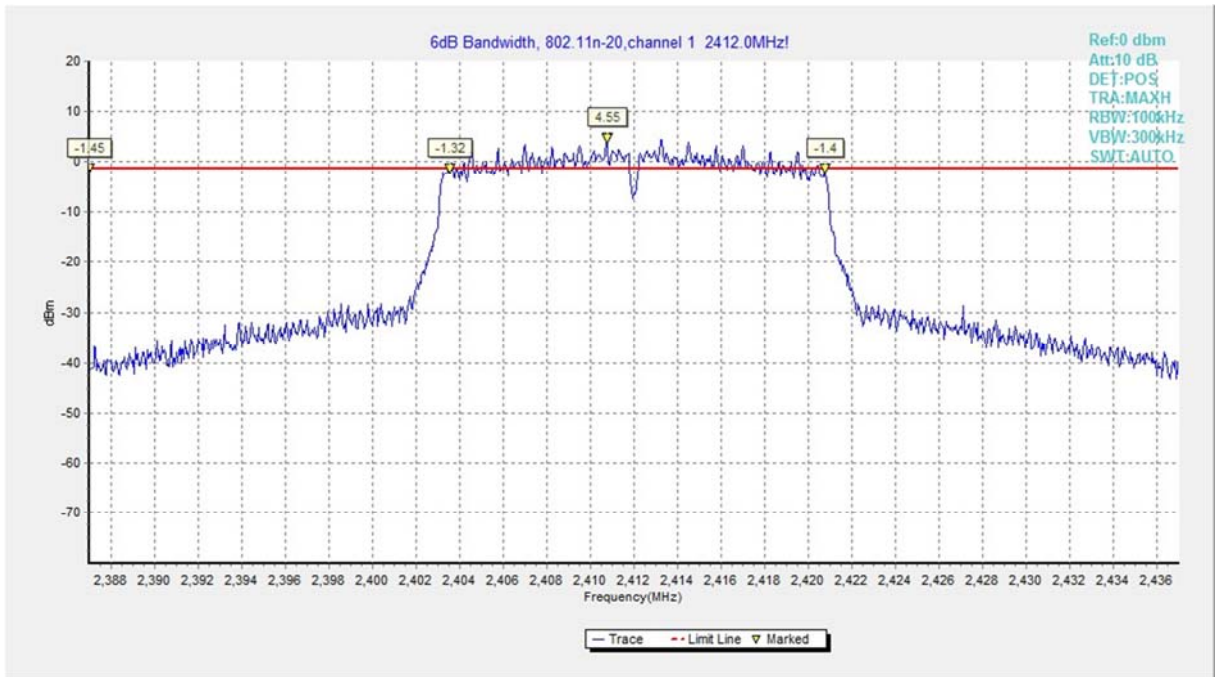


Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

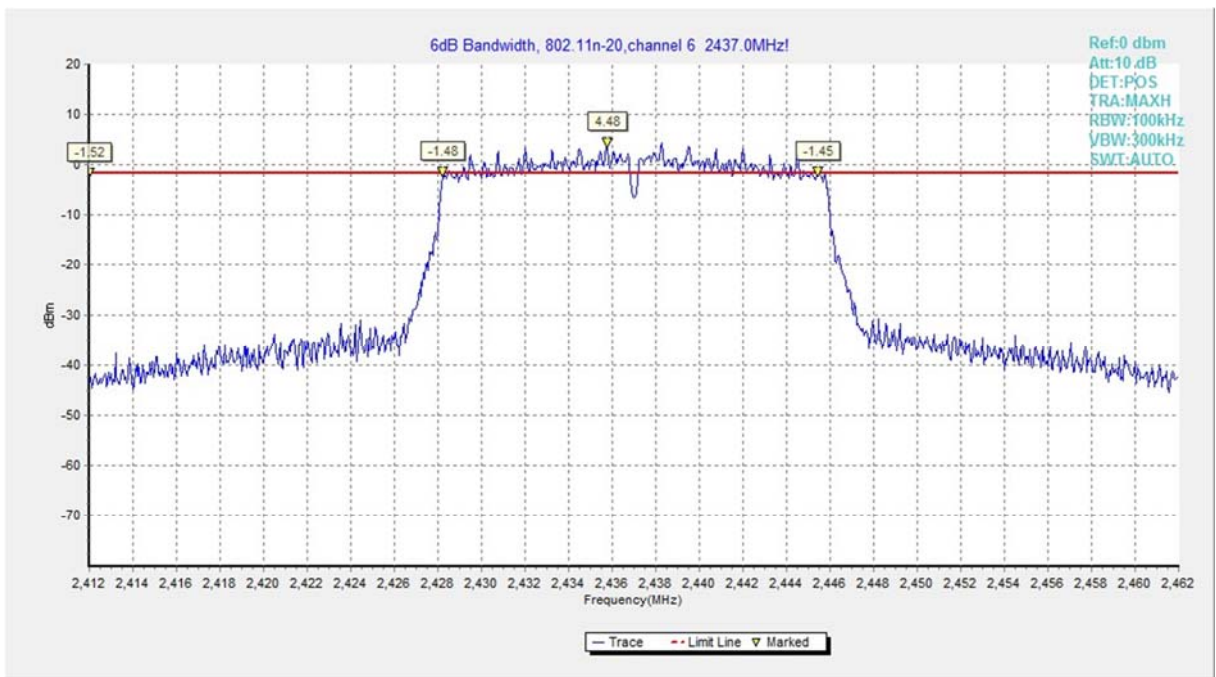


Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)

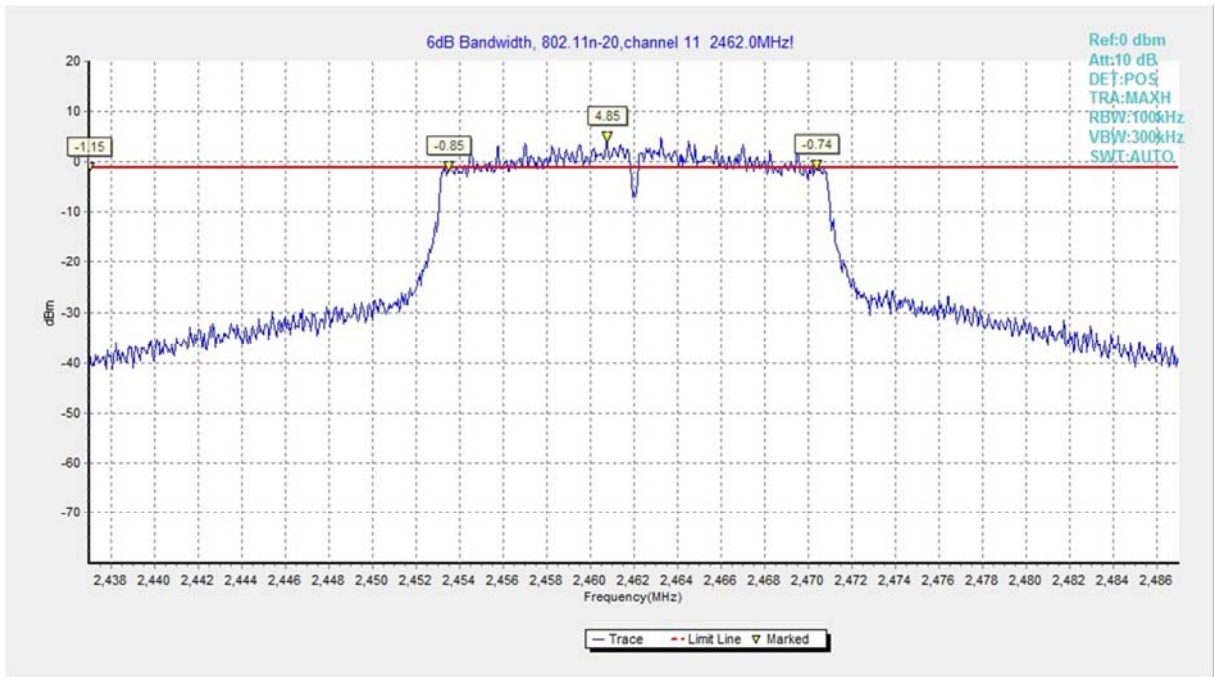


Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)

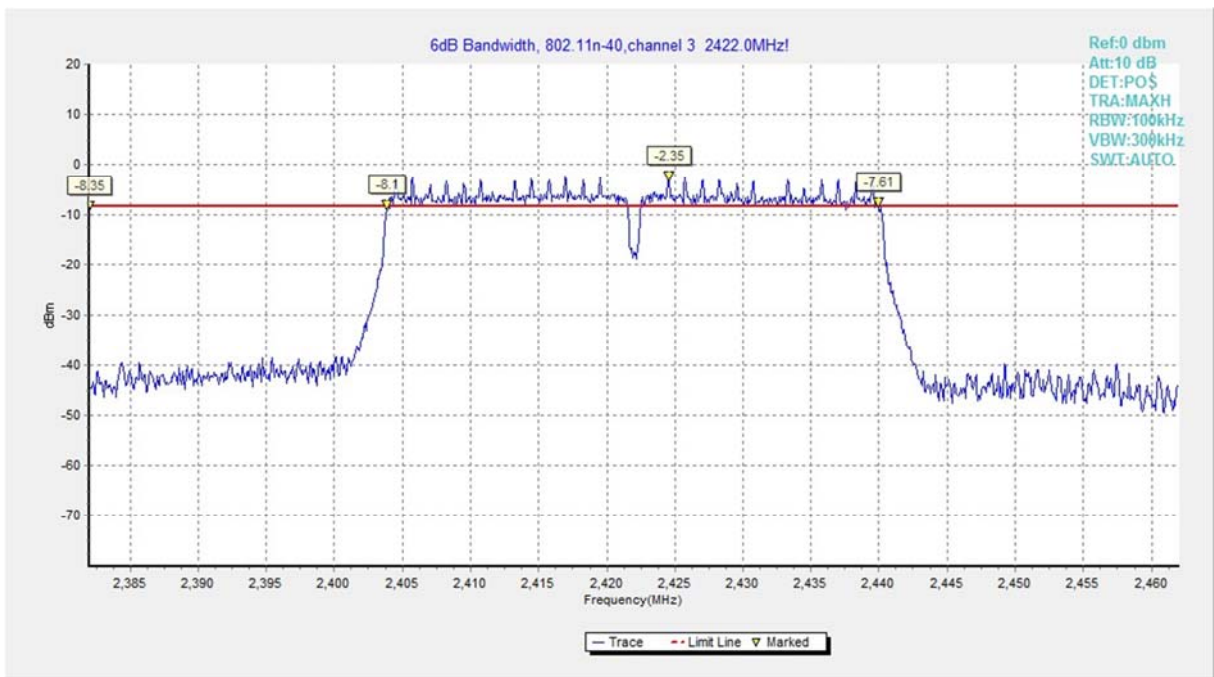


Fig.A.4.10 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 3)

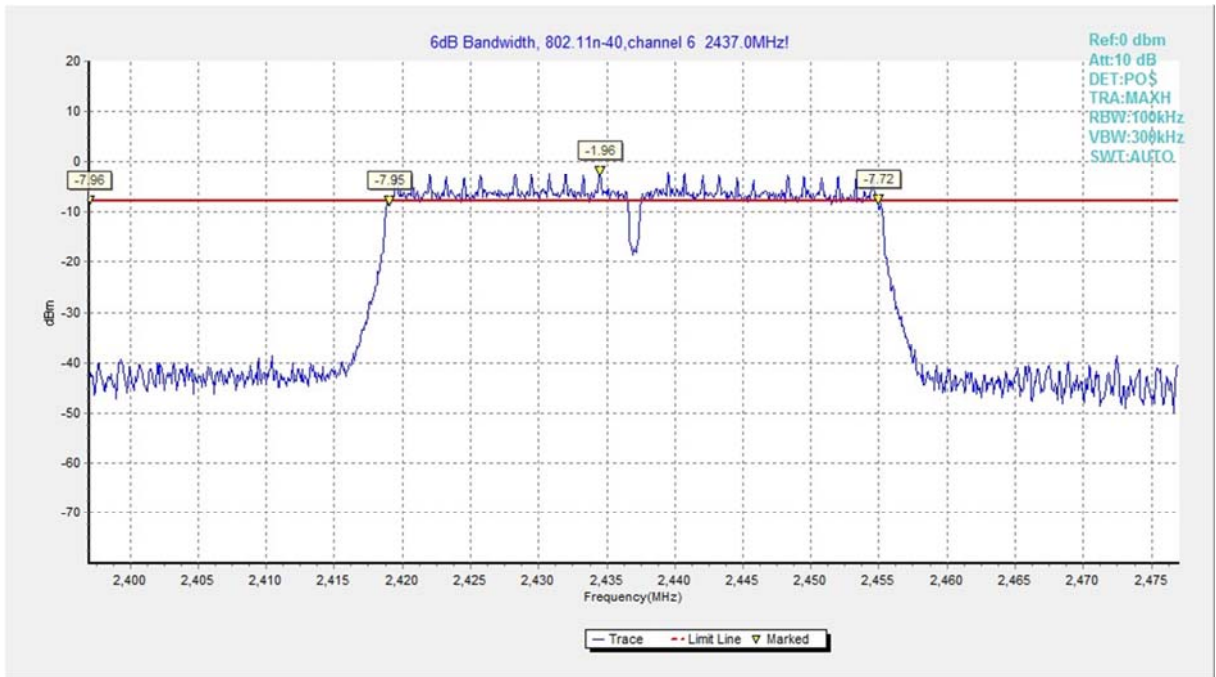


Fig.A.4.11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 6)

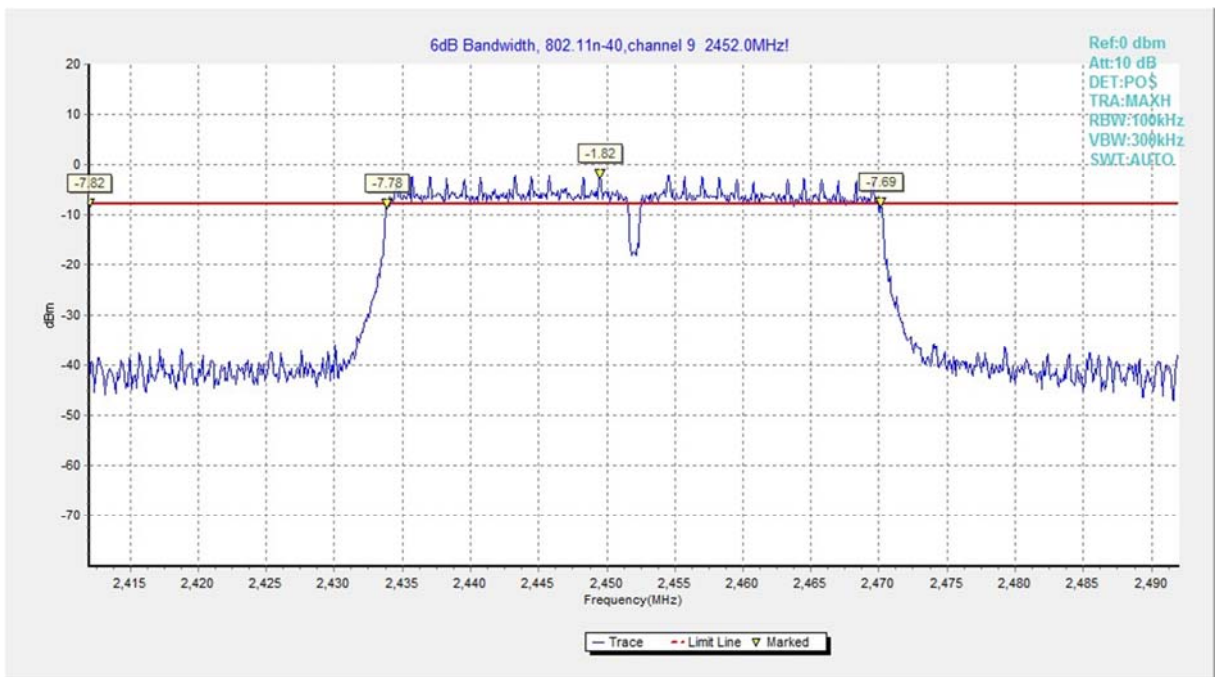


Fig.A.4.12 Occupied 6dB Bandwidth (802.11n-HT40, Ch 9)

### **A.5. Band Edges Compliance**

**Method of Measurement: See ANSI C63.10-2009-clause 6.9.2**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: Set Span for minimum 50 MHz
- Reference Level: 110 dB  $\mu$  V (corrected for gains and losses of test antenna factor, preamp gain and cable loss)
- Attenuation: 10 dB
- Sweep Time: Coupled
- Resolution Bandwidth: Up to and including 1 GHz =  $\geq$  100 kHz
- Resolution Bandwidth: Above 1 GHz = 1 MHz
- Video Bandwidth: Below 1 GHz = 300 kHz
- Video Bandwidth: Up to and including 1 GHz =  $\geq$  3 MHz for peak and 10 Hz for average
- Detector: Peak

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

**EUT ID: EUT2**

**Measurement Result:**

**802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	<b>P</b>
	11	Fig.A.5.2	<b>P</b>
802.11g	1	Fig.A.5.3	<b>P</b>
	11	Fig.A.5.4	<b>P</b>

**802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	<b>P</b>
	11	Fig.A.5.6	<b>P</b>

**802.11n-HT40 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.5.7	<b>P</b>
	9	Fig.A.5.8	<b>P</b>

**Conclusion: Pass**

**Test graphs as below:**



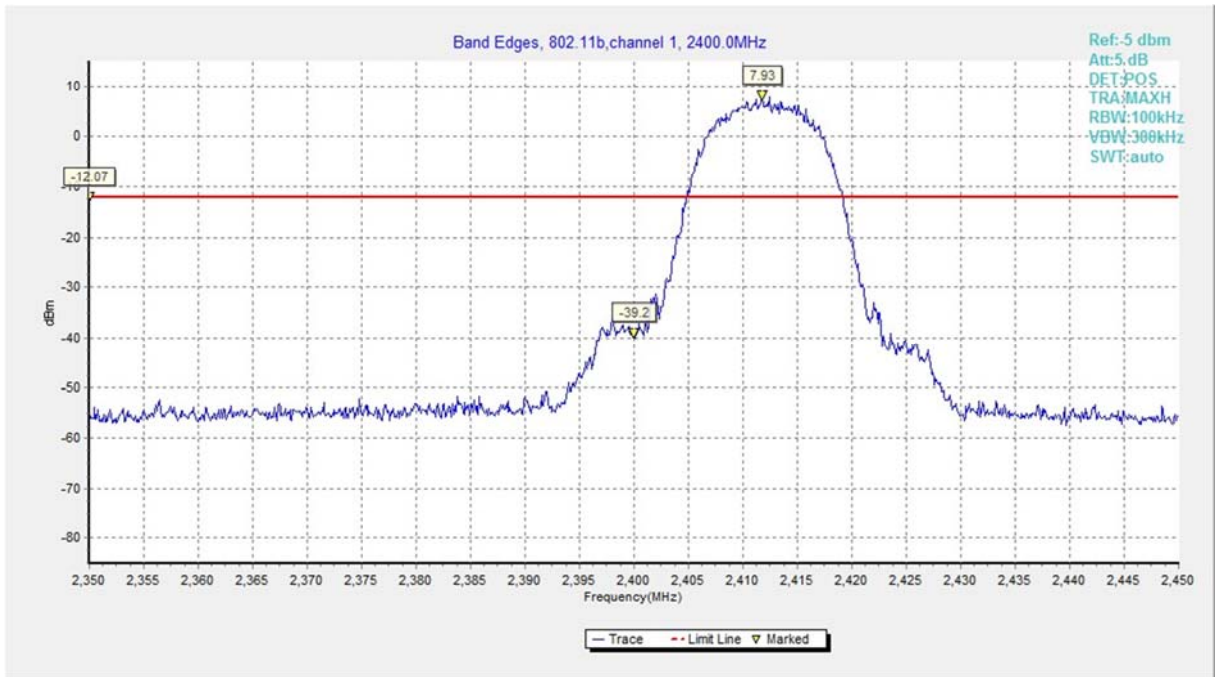


Fig.A.5.1 Band Edges (802.11b, Ch 1)

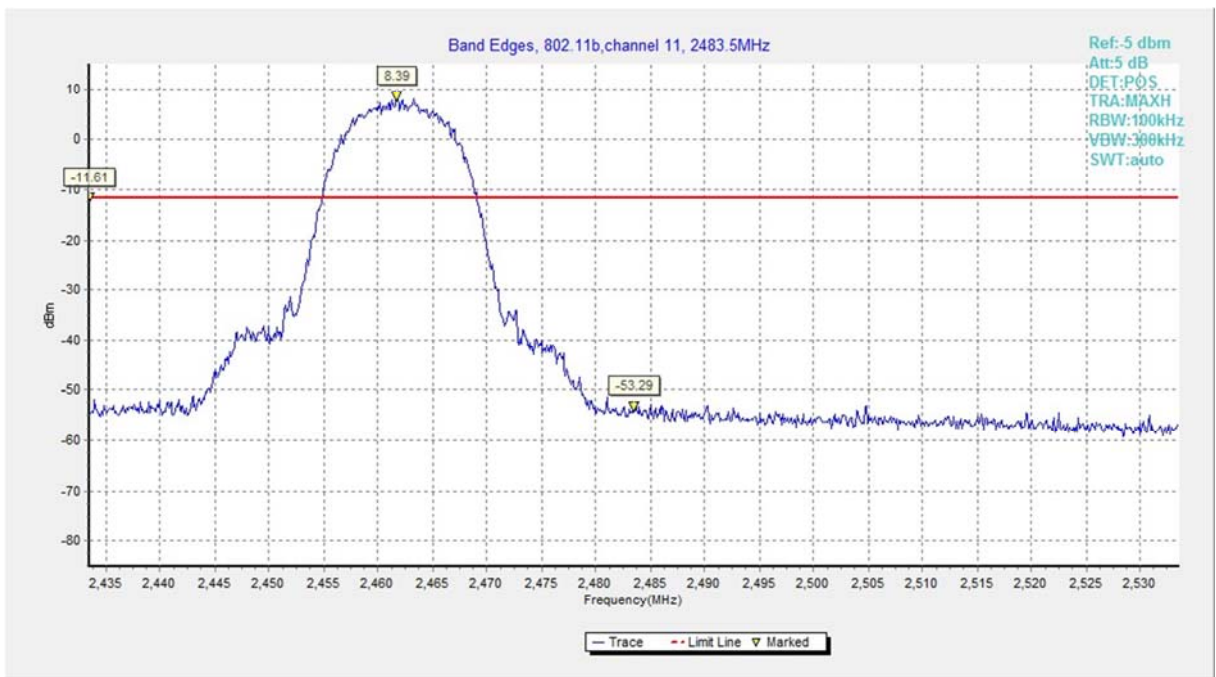


Fig.A.5.2 Band Edges (802.11b, Ch 11)



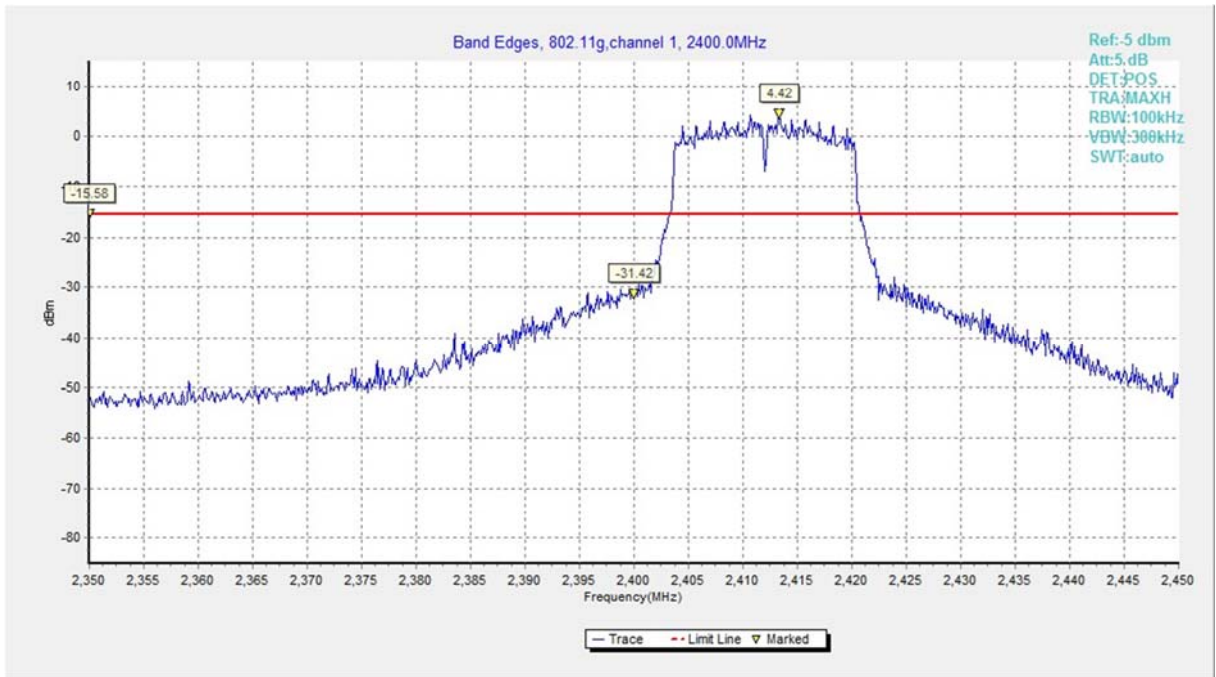


Fig.A.5.3 Band Edges (802.11g, Ch 1)

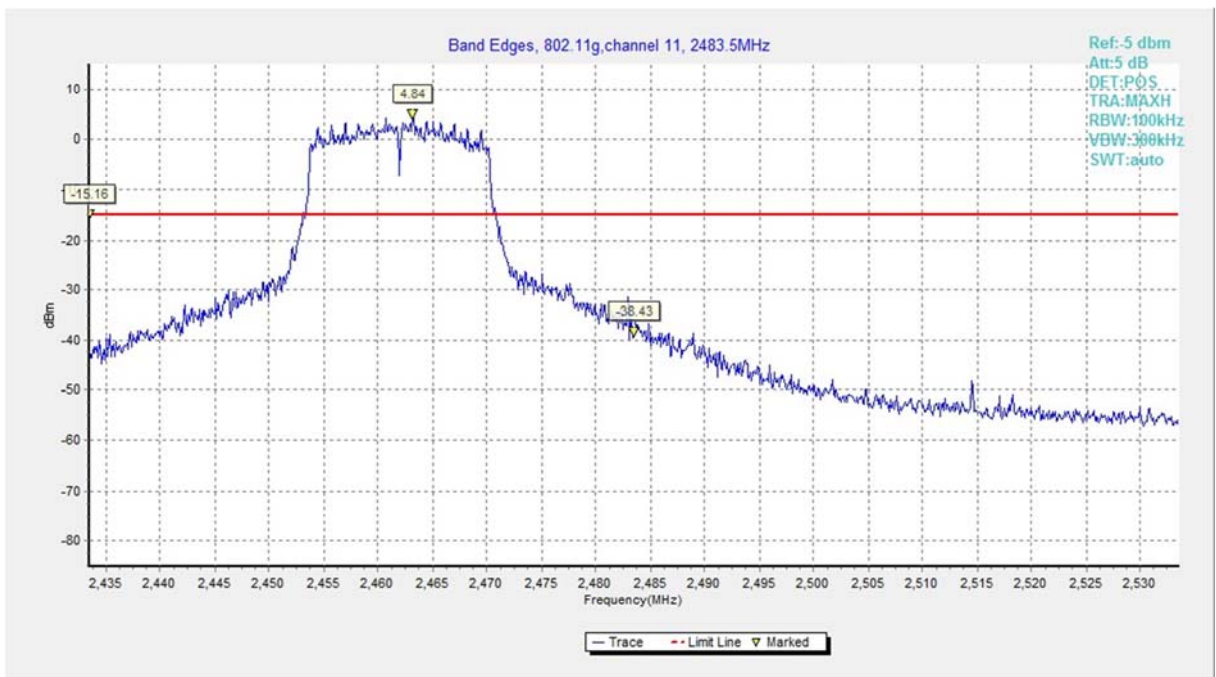


Fig.A.5.4 Band Edges (802.11g, Ch 11)

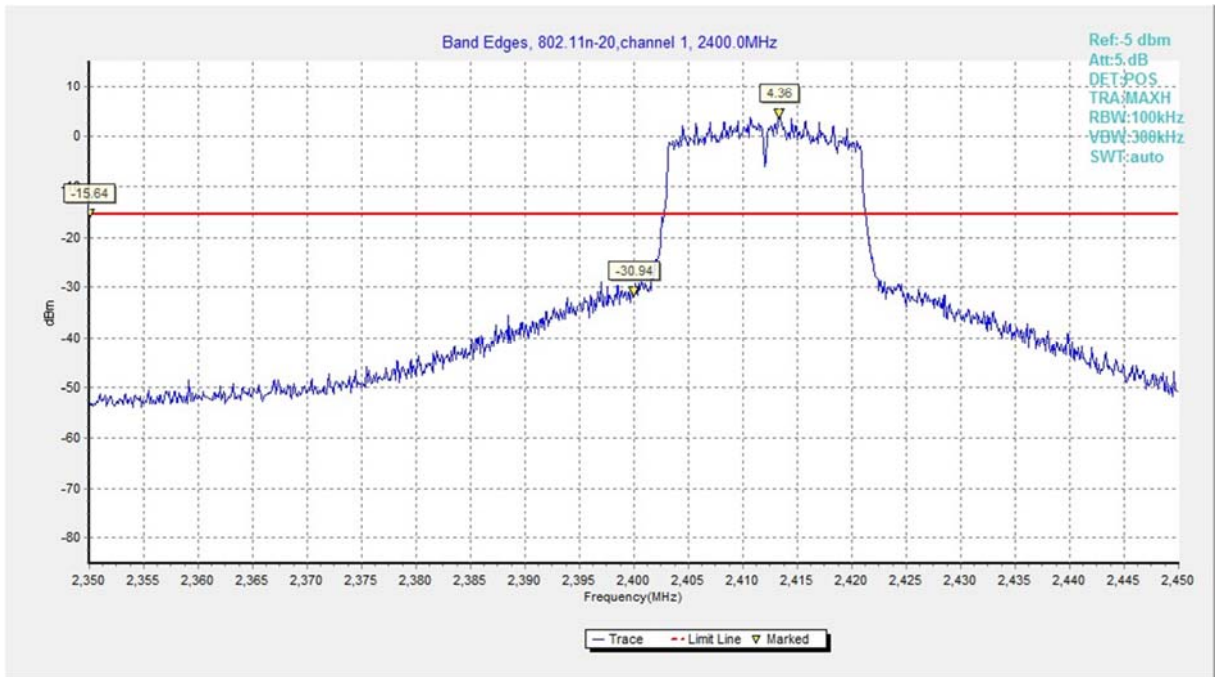


Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)

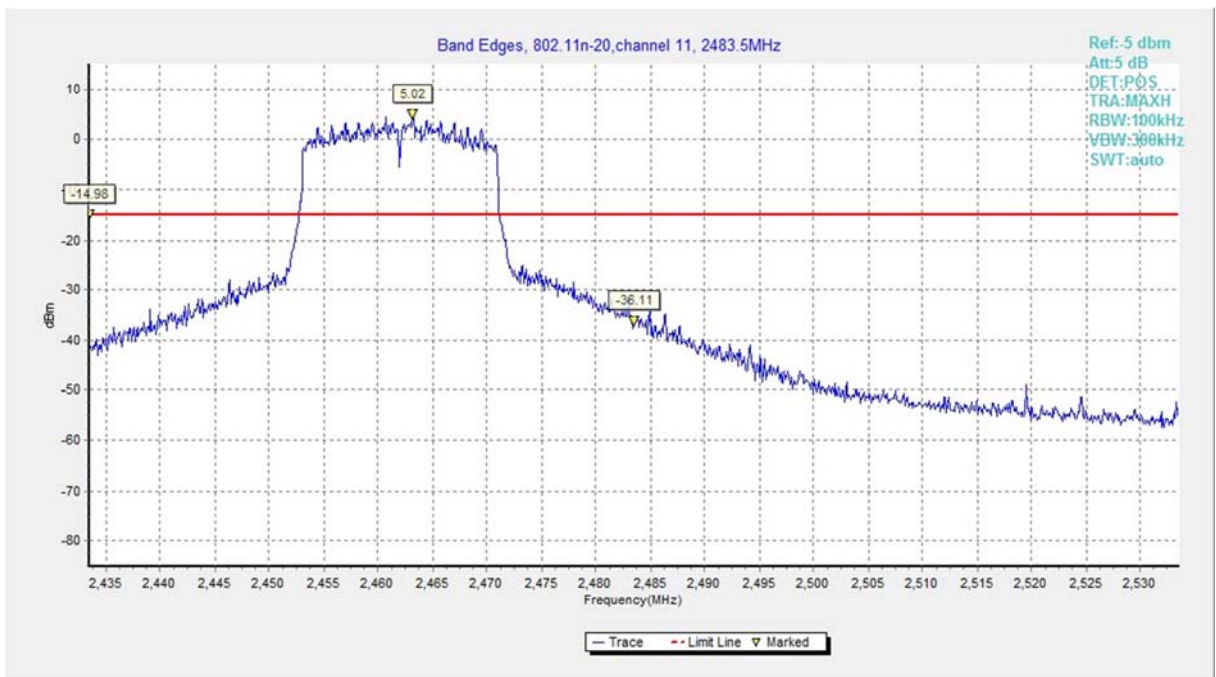


Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)



Fig.A.5.7 Band Edges (802.11n-HT40, Ch 3)

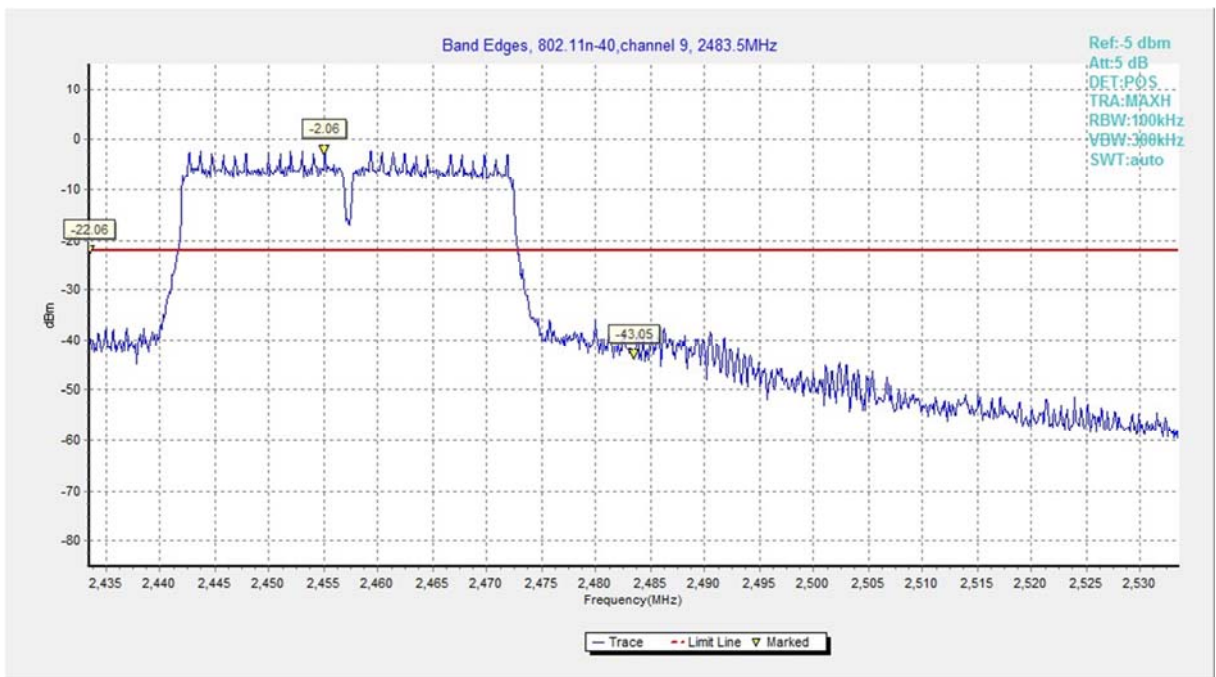


Fig.A.5.8 Band Edges (802.11n-HT40, Ch 9)



## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

**Method of Measurement: See ANSI C63.10-2009-clause 6.10.4**

The following procedure shall be used for measuring peak excursion:

- a) Connect the cable from the spectrum analyzer to the EUT antenna port using an appropriate RF attenuator.
- b) Verify the antenna port selected is the active one if the system has more than one antenna.
- c) Verify the unlicensed wireless device is set to operate at 100 % duty cycle at the maximum allowed power for operation.
- d) Testing shall be done on the center frequency of each U-NII band.
- e) Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be  $\geq 13$  dB for all frequencies across the emission bandwidth.
  - 1) First trace: set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max hold settings.
  - 2) Second trace:  
create the second trace using the settings described in A.1.
- f) Submit a plot of the data with the test report.

#### **Measurement Limit:**

<b>Standard</b>	<b>Limit</b>
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**EUT ID: EUT2**

**Measurement Results:**

802.11b mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.A.6.1.1	P
		30 MHz ~ 1 GHz	Fig.A.6.1.2	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.3	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.4	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.5	P
		10 GHz ~ 15 GHz	Fig.A.6.1.6	P
		15 GHz ~ 20 GHz	Fig.A.6.1.7	P
		20 GHz ~ 26 GHz	Fig.A.6.1.8	P
	6	2.437 GHz	Fig.A.6.1.9	P
		30 MHz ~ 1 GHz	Fig.A.6.1.10	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.11	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.12	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.13	P
		10 GHz ~ 15 GHz	Fig.A.6.1.14	P
		15 GHz ~ 20 GHz	Fig.A.6.1.15	P
		20 GHz ~ 26 GHz	Fig.A.6.1.16	P
	11	2.462 GHz	Fig.A.6.1.17	P
		30 MHz ~ 1 GHz	Fig.A.6.1.18	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.19	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.20	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.21	P
		10 GHz ~ 15 GHz	Fig.A.6.1.22	P
		15 GHz ~ 20 GHz	Fig.A.6.1.23	P
		20 GHz ~ 26 GHz	Fig.A.6.1.24	P



802.11g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.25	P
		30 MHz ~ 1 GHz	Fig.A.6.1.26	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.27	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.28	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.29	P
		10 GHz ~ 15 GHz	Fig.A.6.1.30	P
		15 GHz ~ 20 GHz	Fig.A.6.1.31	P
		20 GHz ~ 26 GHz	Fig.A.6.1.32	P
	6	2.437 GHz	Fig.A.6.1.33	P
		30 MHz ~ 1 GHz	Fig.A.6.1.34	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.35	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.36	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.37	P
		10 GHz ~ 15 GHz	Fig.A.6.1.38	P
		15 GHz ~ 20 GHz	Fig.A.6.1.39	P
		20 GHz ~ 26 GHz	Fig.A.6.1.40	P
	11	2.462 GHz	Fig.A.6.1.41	P
		30 MHz ~ 1 GHz	Fig.A.6.1.42	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.43	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.44	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.45	P
		10 GHz ~ 15 GHz	Fig.A.6.1.46	P
		15 GHz ~ 20 GHz	Fig.A.6.1.47	P
		20 GHz ~ 26 GHz	Fig.A.6.1.48	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.49	P
		30 MHz ~ 1 GHz	Fig.A.6.1.50	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.51	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.52	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.53	P
		10 GHz ~ 15 GHz	Fig.A.6.1.54	P
		15 GHz ~ 20 GHz	Fig.A.6.1.55	P
		20 GHz ~ 26 GHz	Fig.A.6.1.56	P
	6	2.437 GHz	Fig.A.6.1.57	P
		30 MHz ~ 1 GHz	Fig.A.6.1.58	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.59	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.60	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.61	P
		10 GHz ~ 15 GHz	Fig.A.6.1.62	P
		15 GHz ~ 20 GHz	Fig.A.6.1.63	P
		20 GHz ~ 26 GHz	Fig.A.6.1.64	P
	11	2.462 GHz	Fig.A.6.1.65	P
		30 MHz ~ 1 GHz	Fig.A.6.1.66	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.67	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.68	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.69	P
		10 GHz ~ 15 GHz	Fig.A.6.1.70	P
		15 GHz ~ 20 GHz	Fig.A.6.1.71	P
		20 GHz ~ 26 GHz	Fig.A.6.1.72	P


**802.11n-HT40 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.422 GHz	Fig.A.6.1.73	P
		30 MHz ~ 1 GHz	Fig.A.6.1.74	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.75	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.76	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.77	P
		10 GHz ~ 15 GHz	Fig.A.6.1.78	P
		15 GHz ~ 20 GHz	Fig.A.6.1.79	P
		20 GHz ~ 26 GHz	Fig.A.6.1.80	P
	6	2.437 GHz	Fig.A.6.1.81	P
		30 MHz ~ 1 GHz	Fig.A.6.1.82	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.83	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.84	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.85	P
		10 GHz ~ 15 GHz	Fig.A.6.1.86	P
		15 GHz ~ 20 GHz	Fig.A.6.1.87	P
		20 GHz ~ 26 GHz	Fig.A.6.1.88	P
	9	2.452 GHz	Fig.A.6.1.89	P
		30 MHz ~ 1 GHz	Fig.A.6.1.90	P
		1 GHz ~ 2.5 GHz	Fig.A.6.1.91	P
		2.5 GHz ~ 7.5 GHz	Fig.A.6.1.92	P
		7.5 GHz ~ 10 GHz	Fig.A.6.1.93	P
		10 GHz ~ 15 GHz	Fig.A.6.1.94	P
		15 GHz ~ 20 GHz	Fig.A.6.1.95	P
		20 GHz ~ 26 GHz	Fig.A.6.1.96	P


**Conclusion: Pass**

**Test graphs as below:**



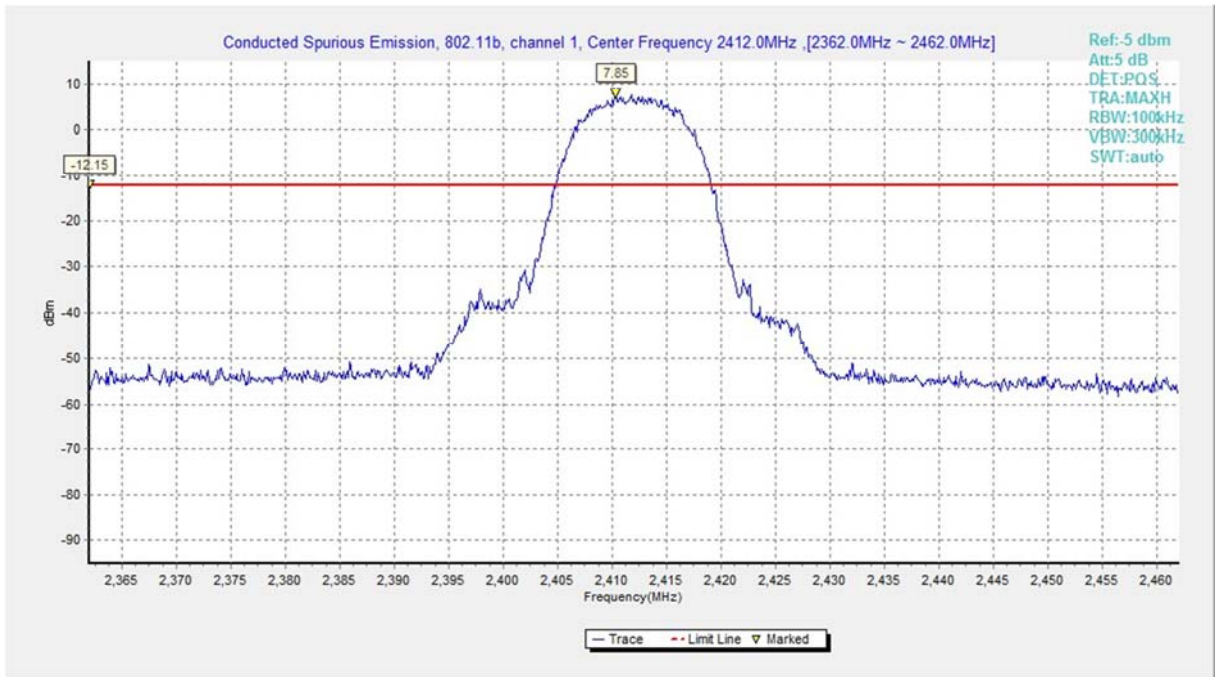

**Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)**

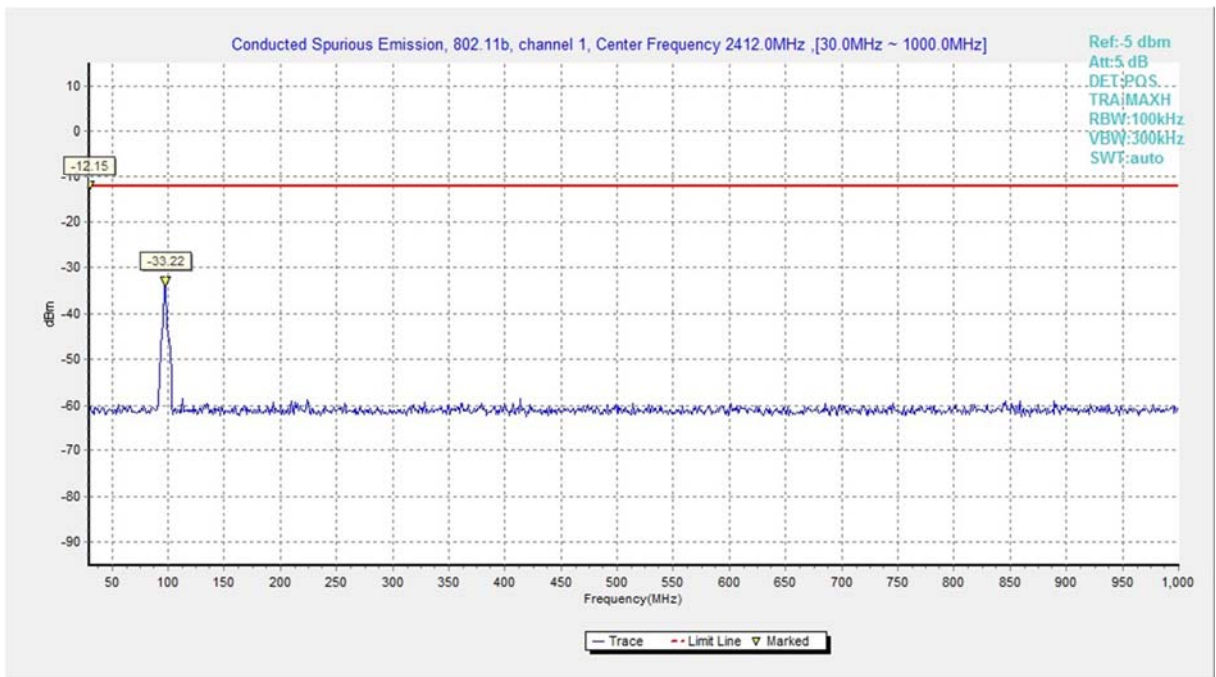

**Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)**

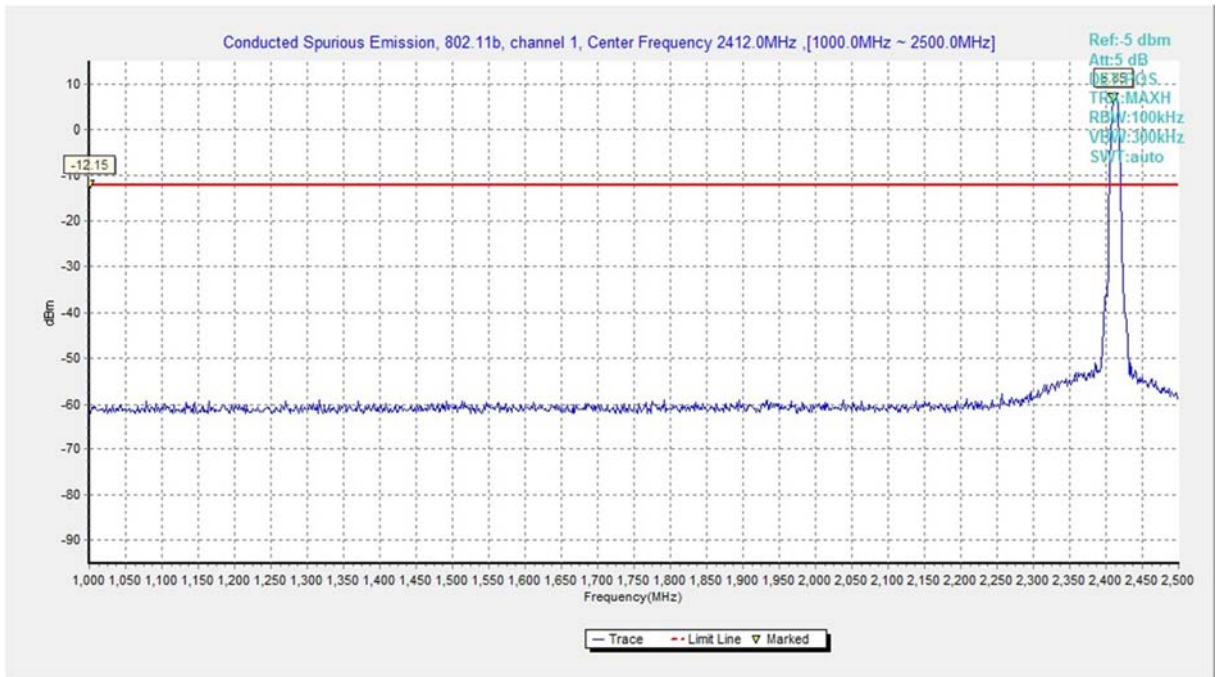


Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-2.5 GHz)



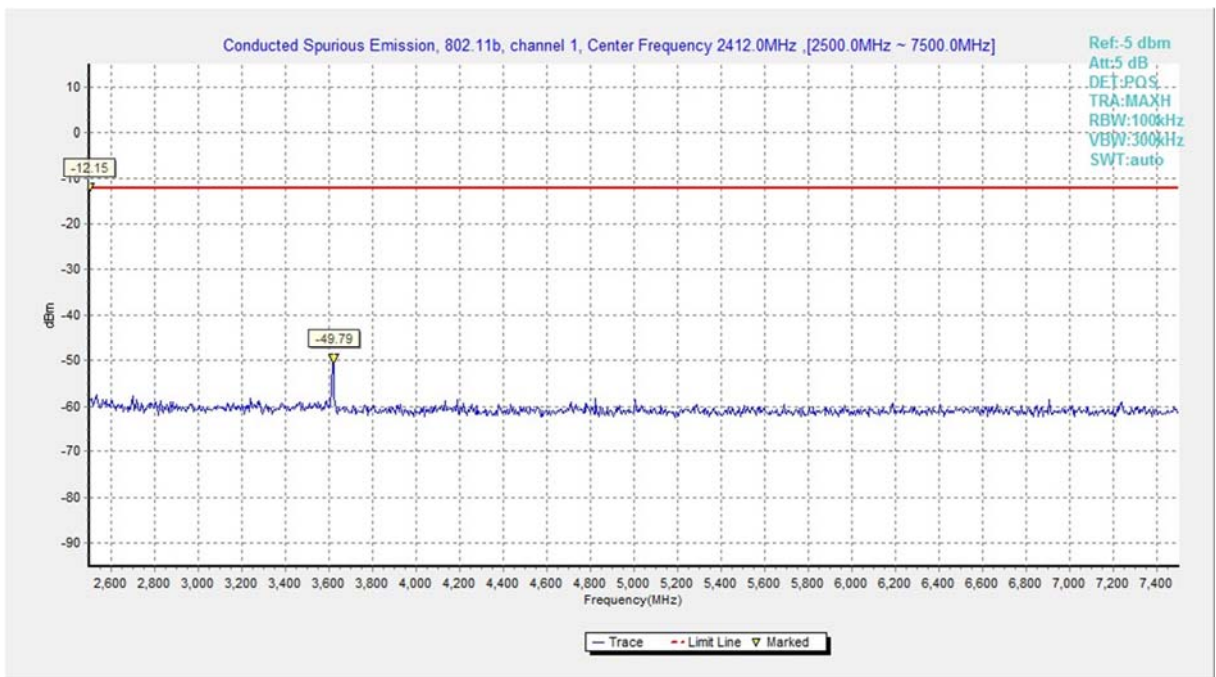


Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 2.5 GHz-7.5 GHz)

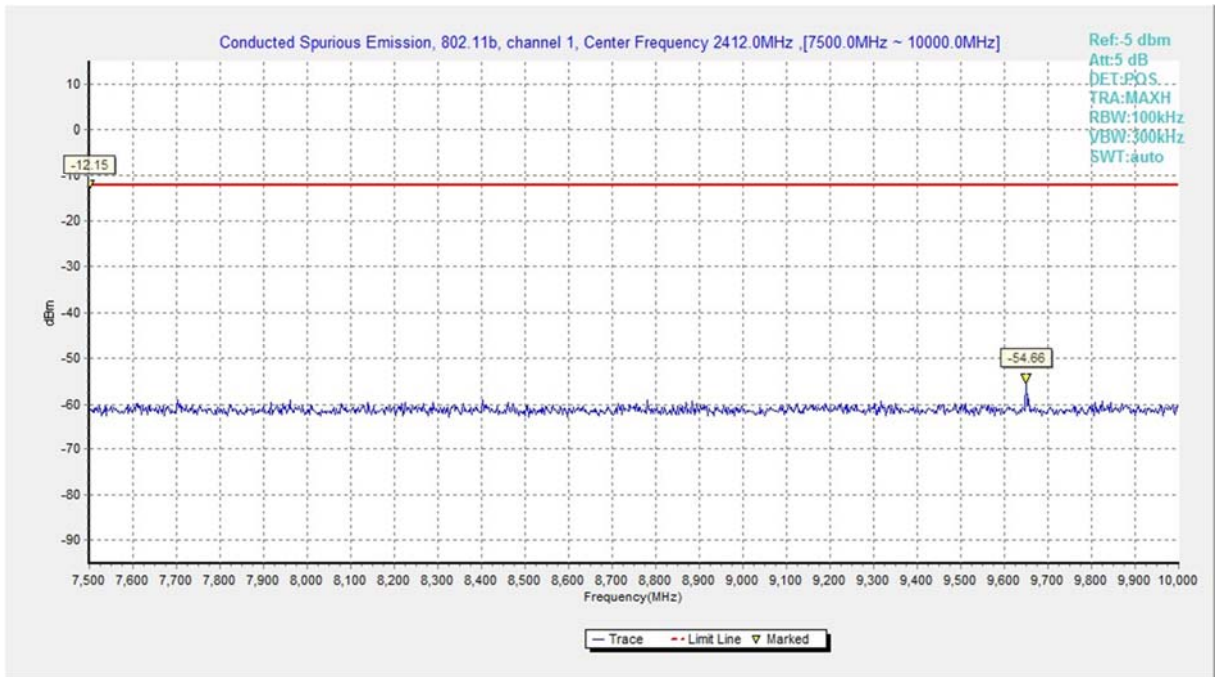


**Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 7.5 GHz-10 GHz)**

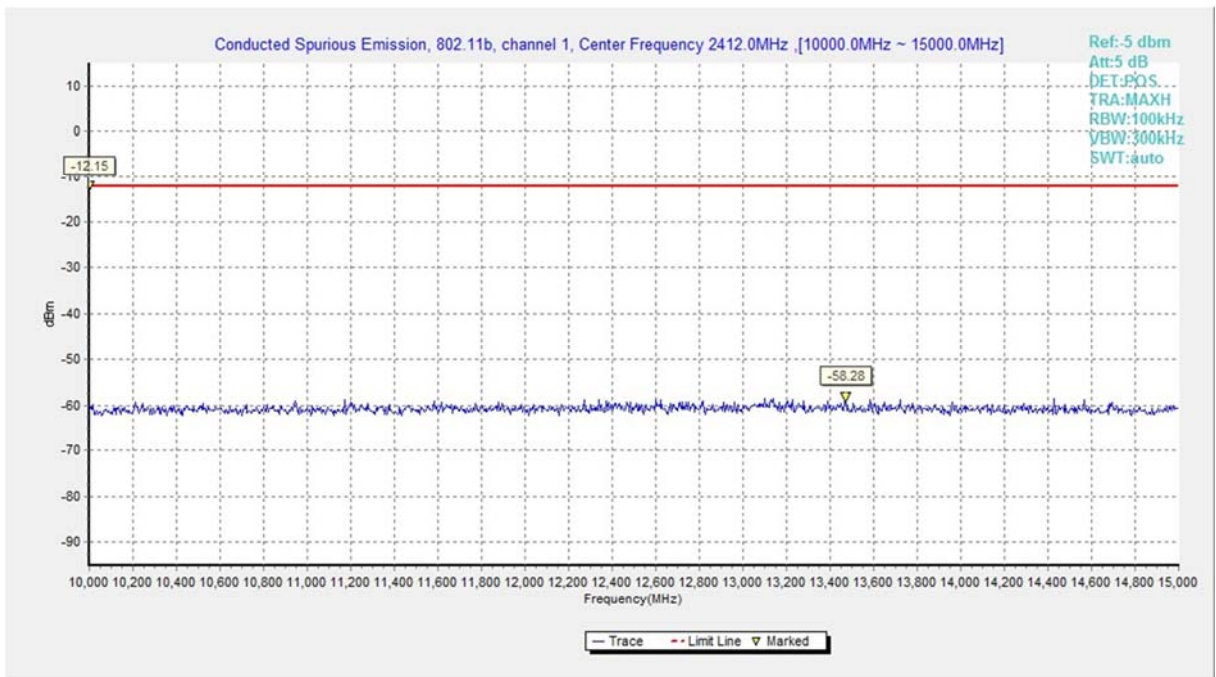


**Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 10 GHz-15 GHz)**



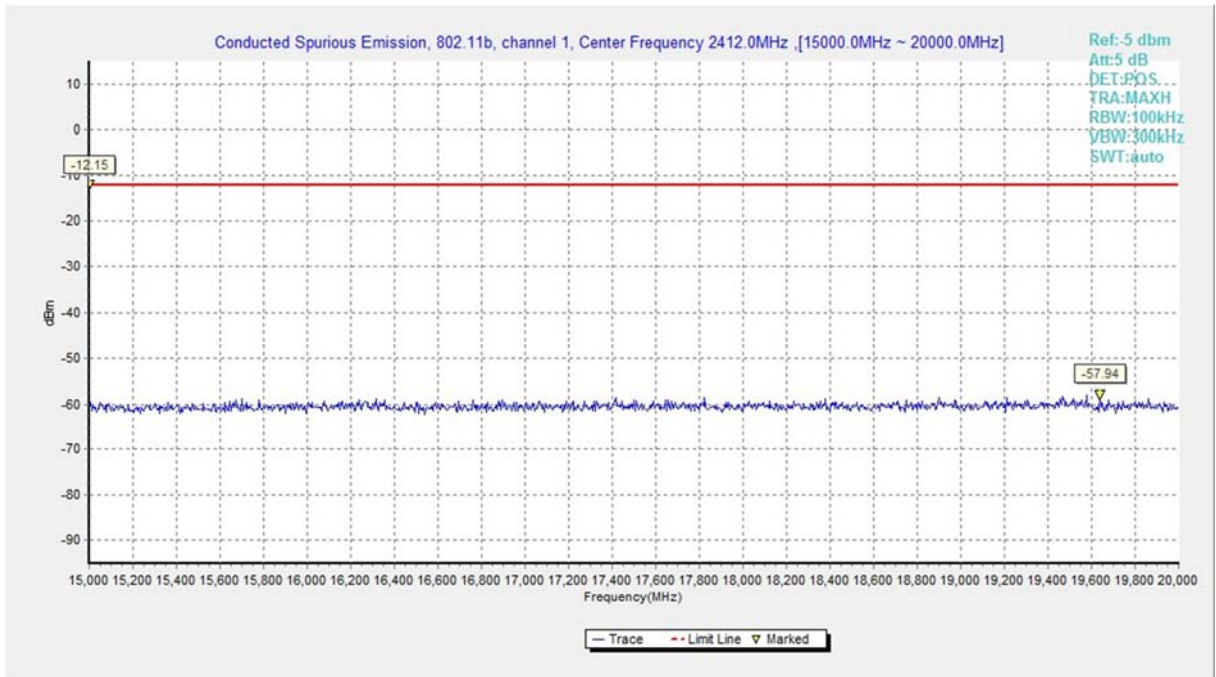

**Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 15 GHz-20 GHz)**

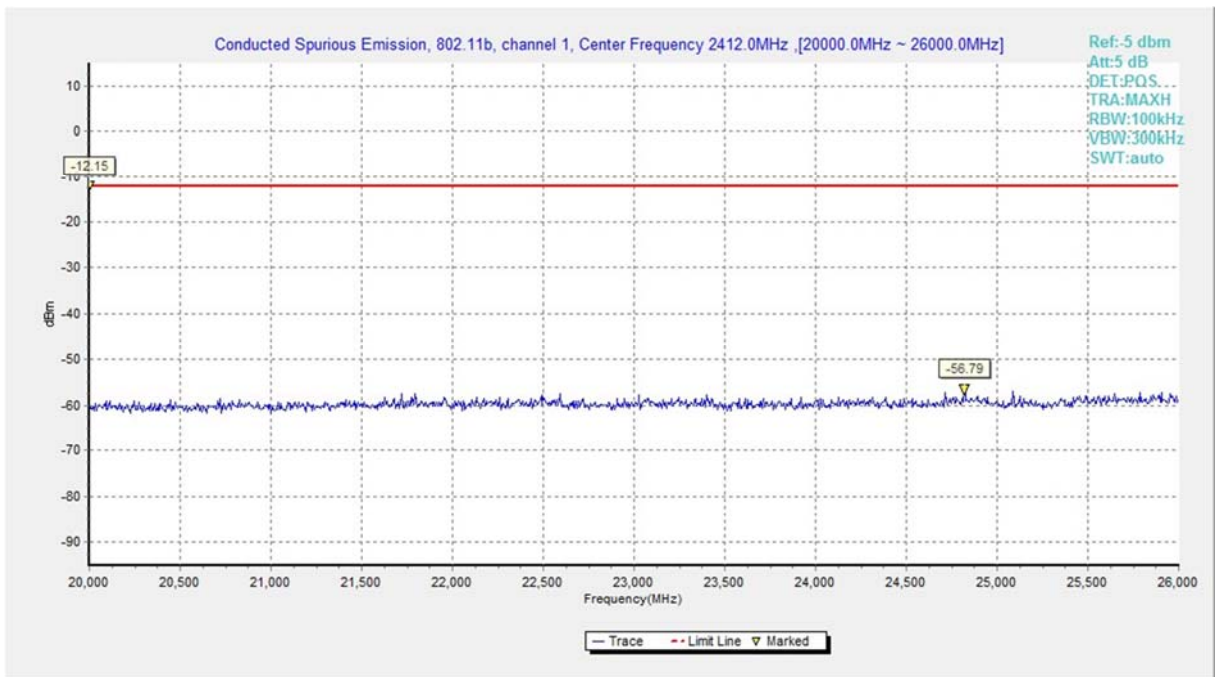

**Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 20 GHz-26 GHz)**

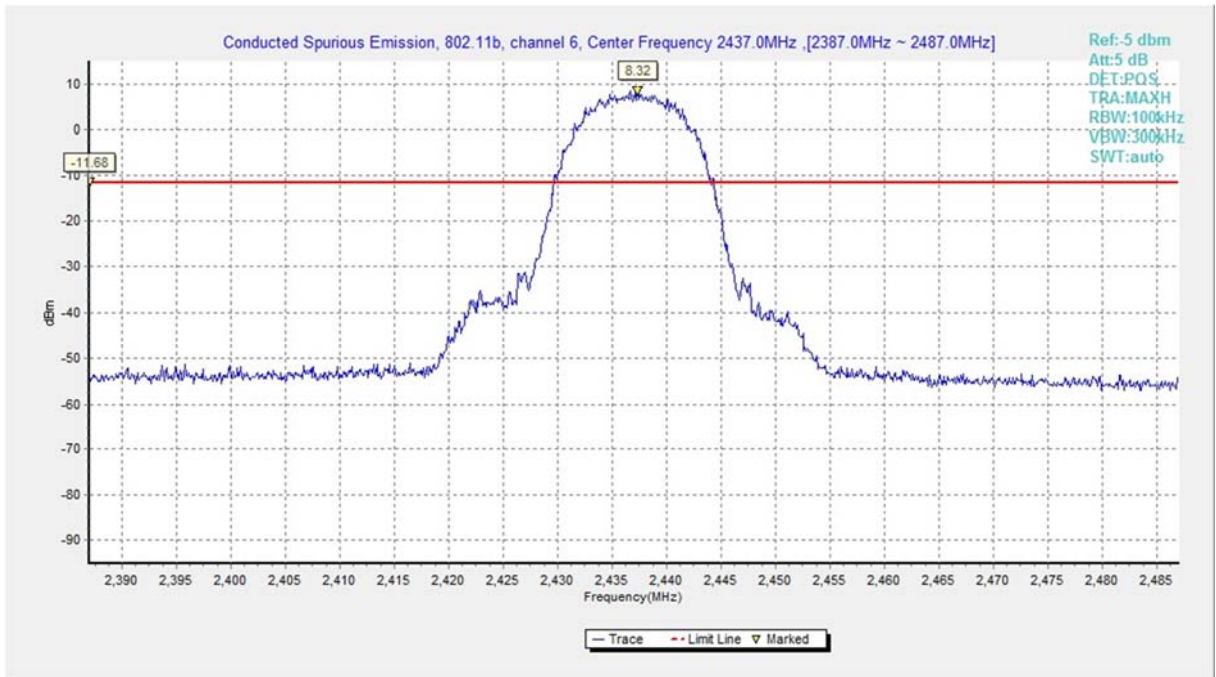


Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)

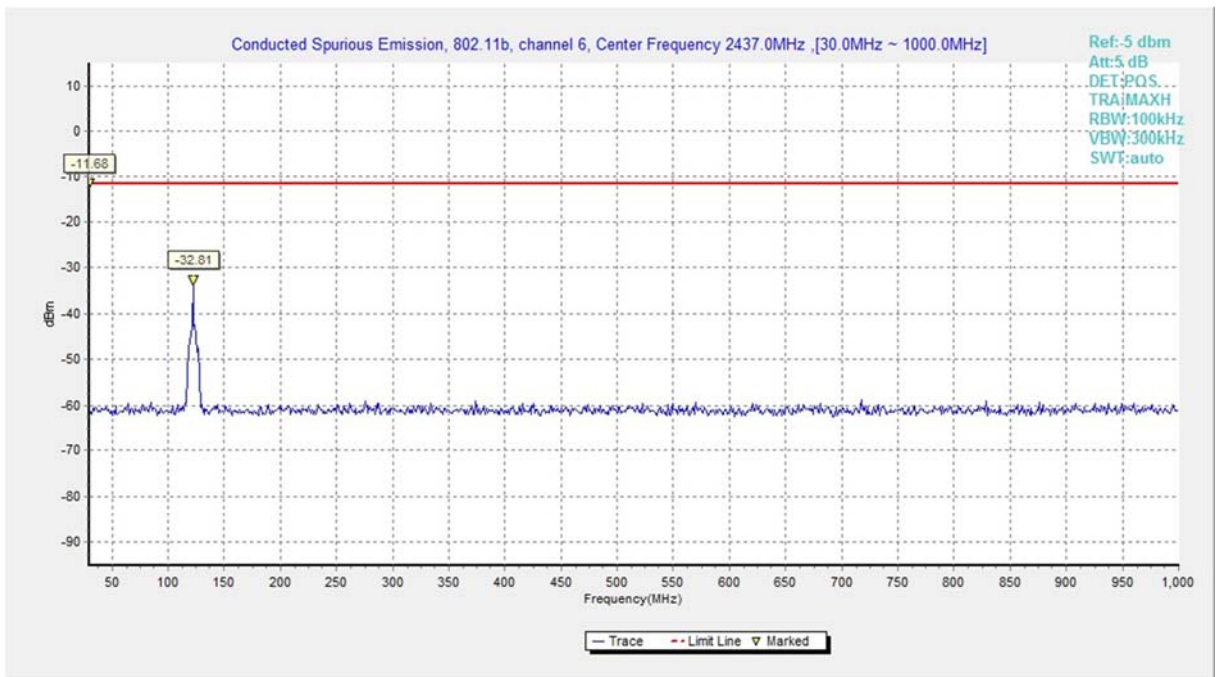


Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)

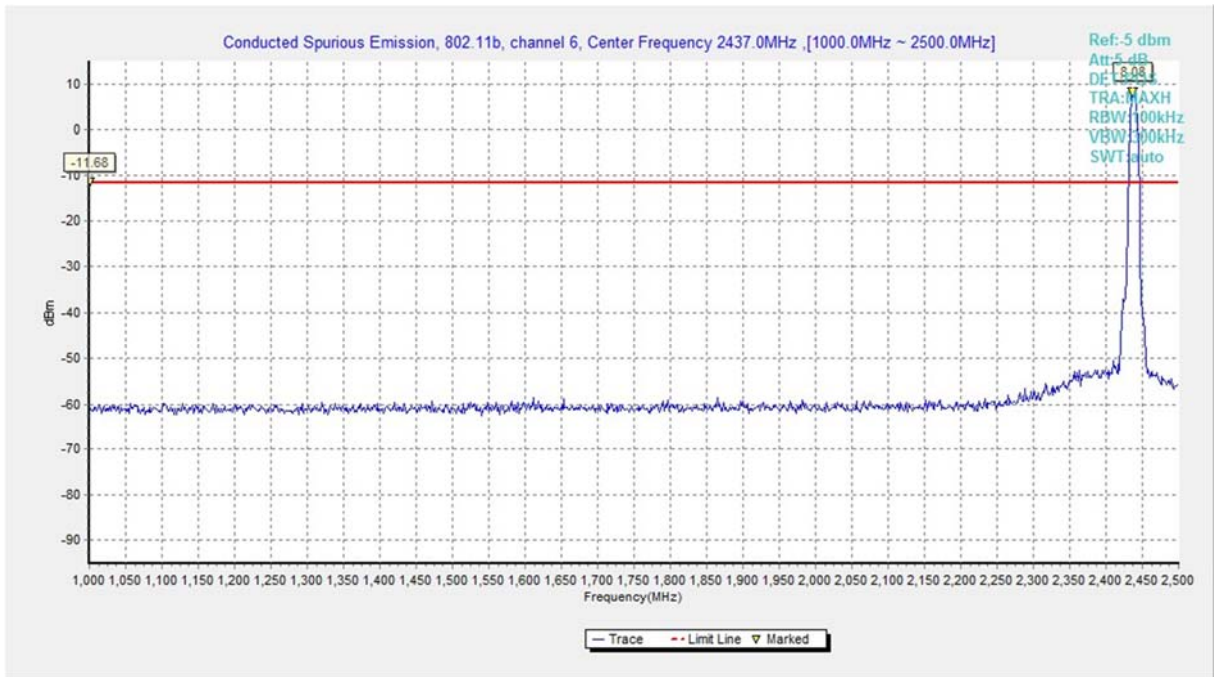


Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-2.5 GHz)



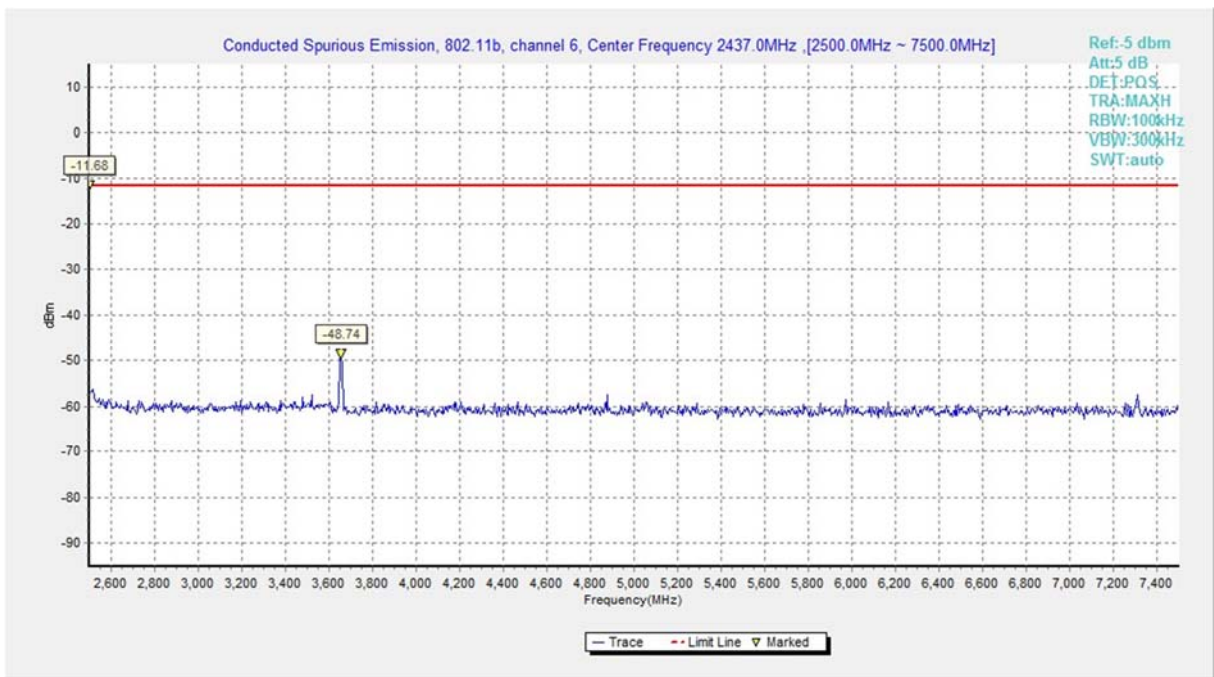


Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 2.5 GHz-7.5 GHz)




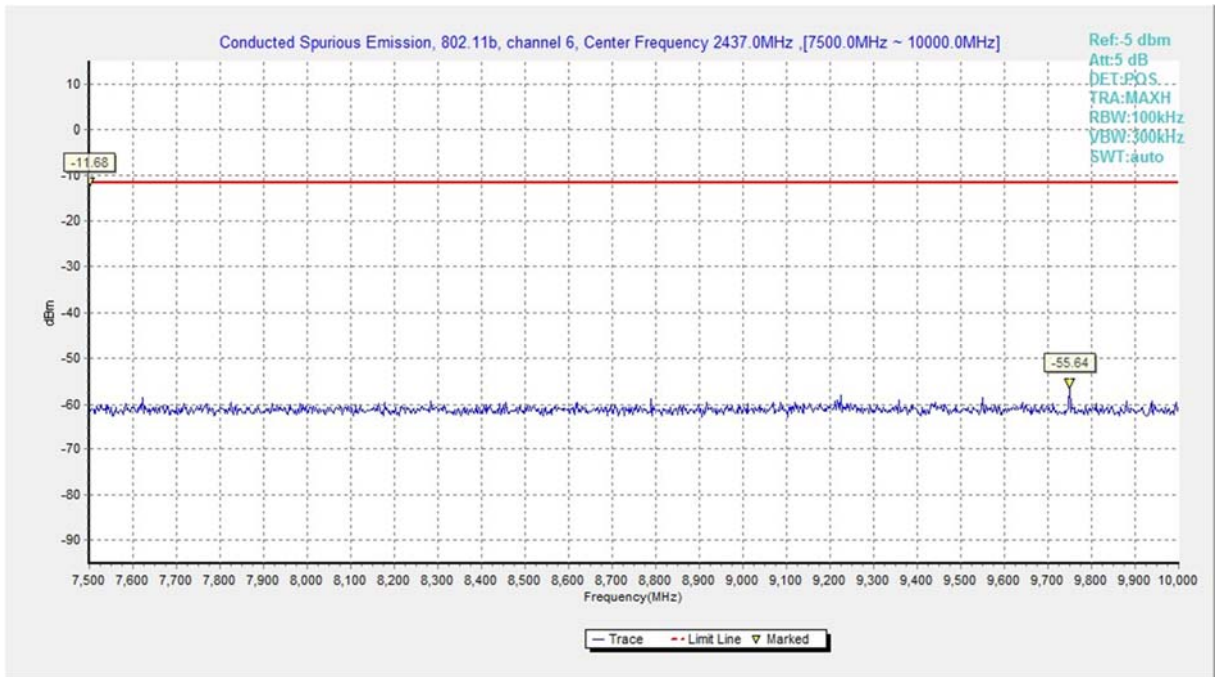


**Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 7.5 GHz-10 GHz)**

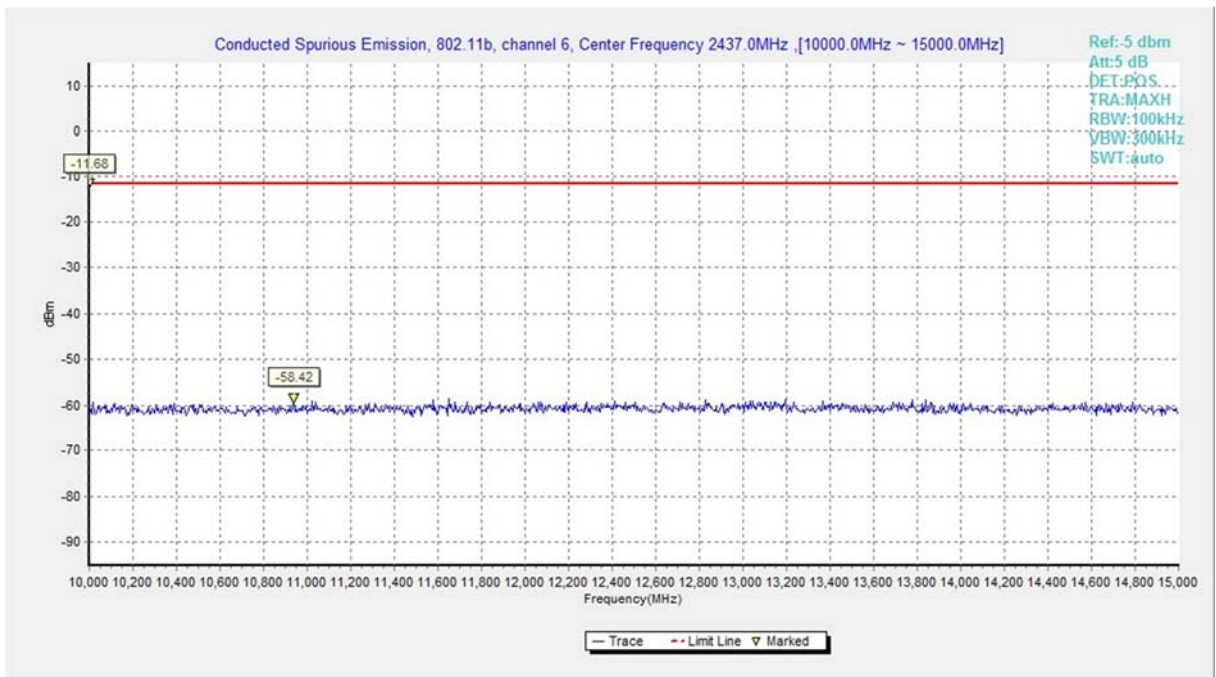


**Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 10 GHz-15 GHz)**

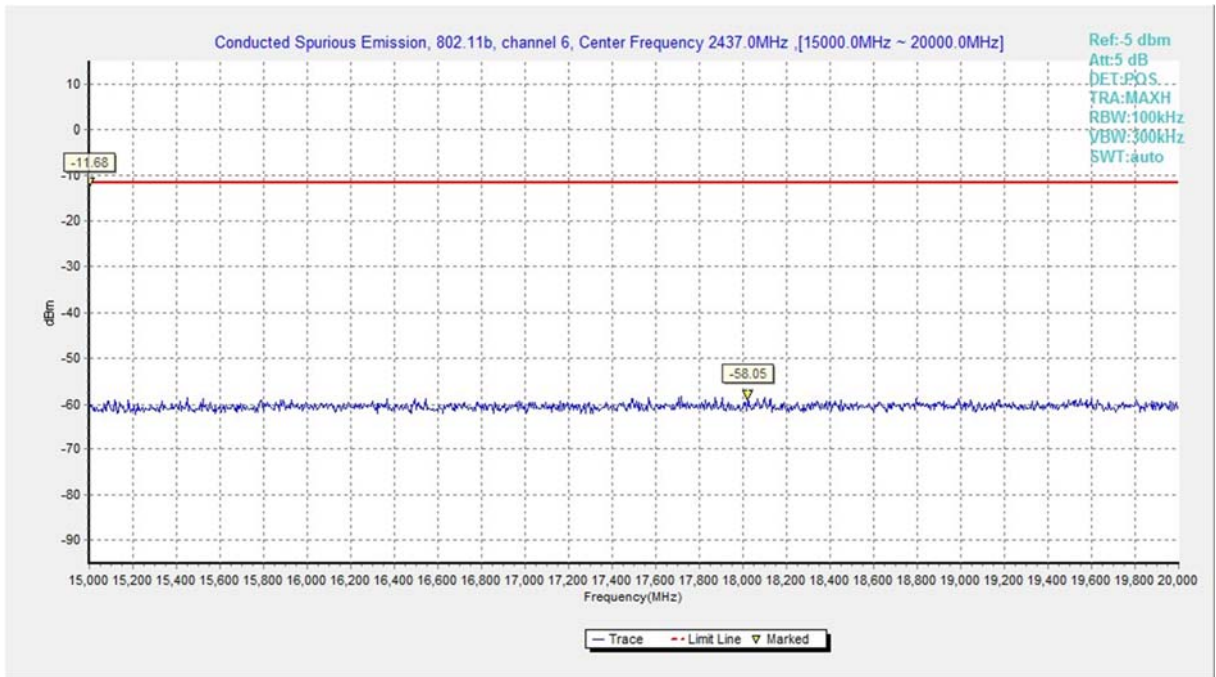


**Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 15 GHz-20 GHz)**

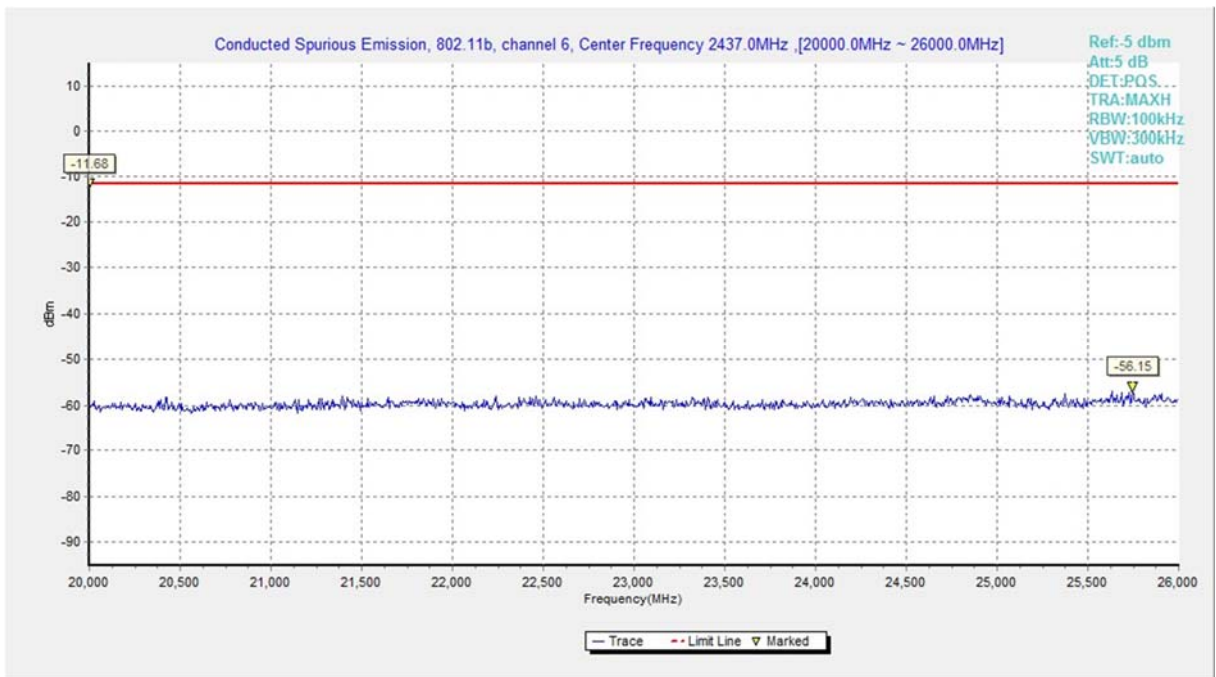

**Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 20 GHz-26 GHz)**

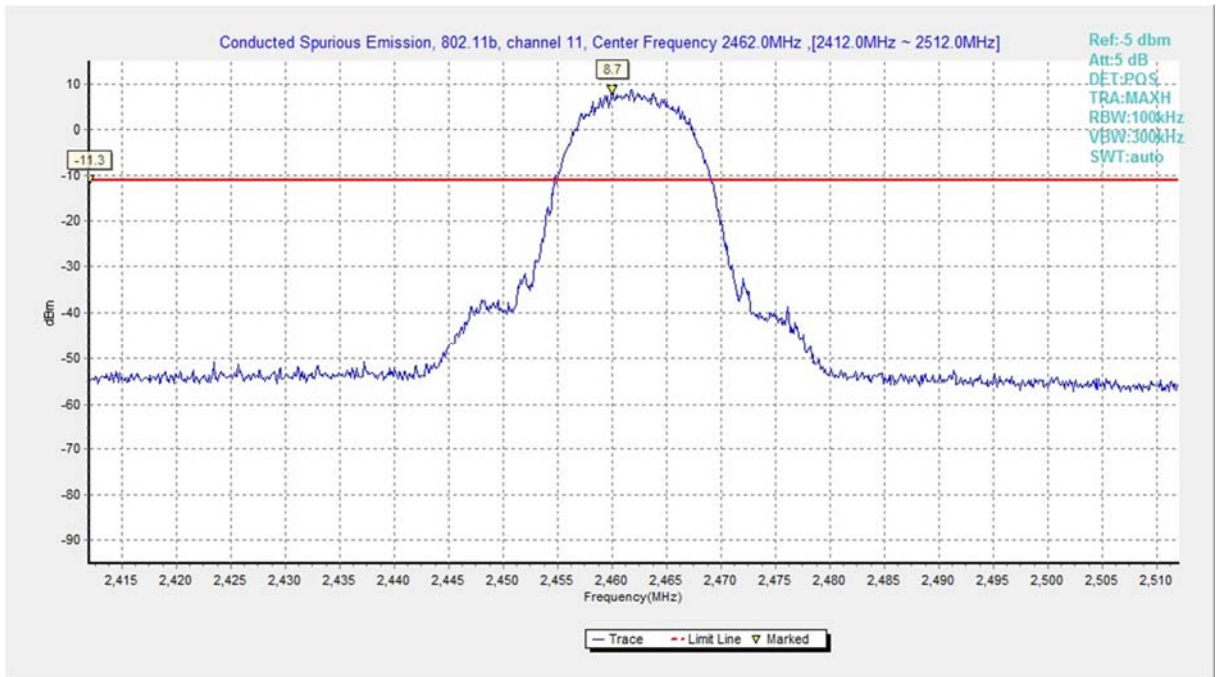


**Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)**

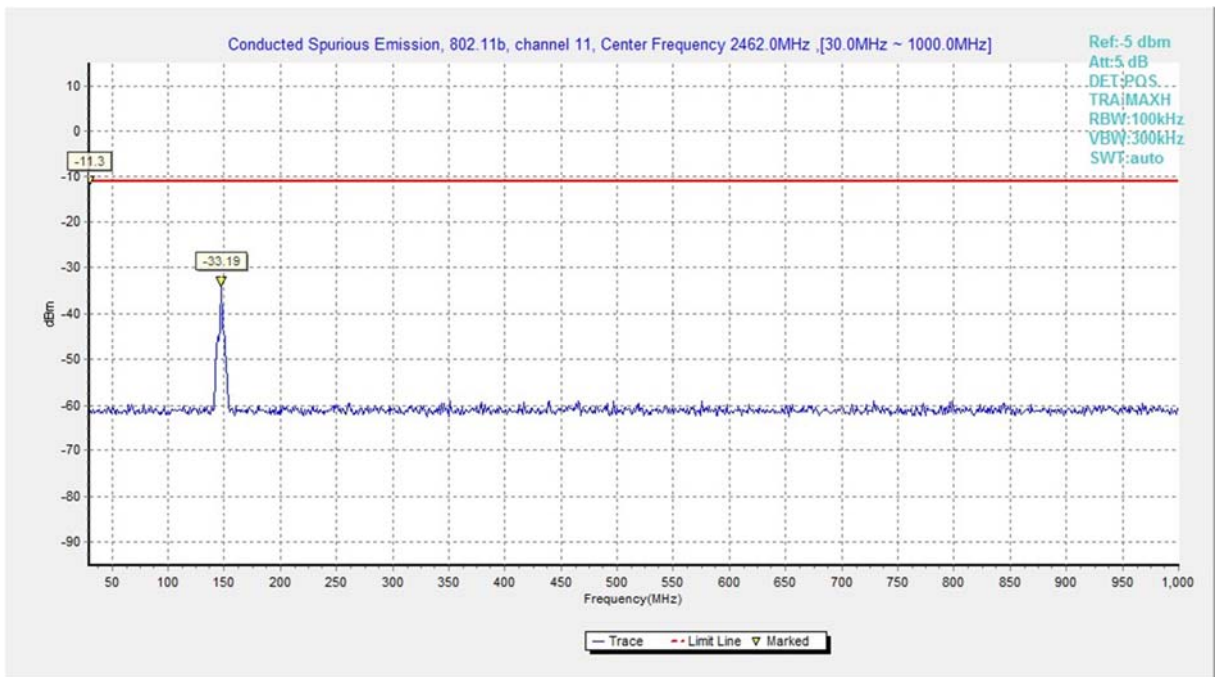


**Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-1 GHz)**




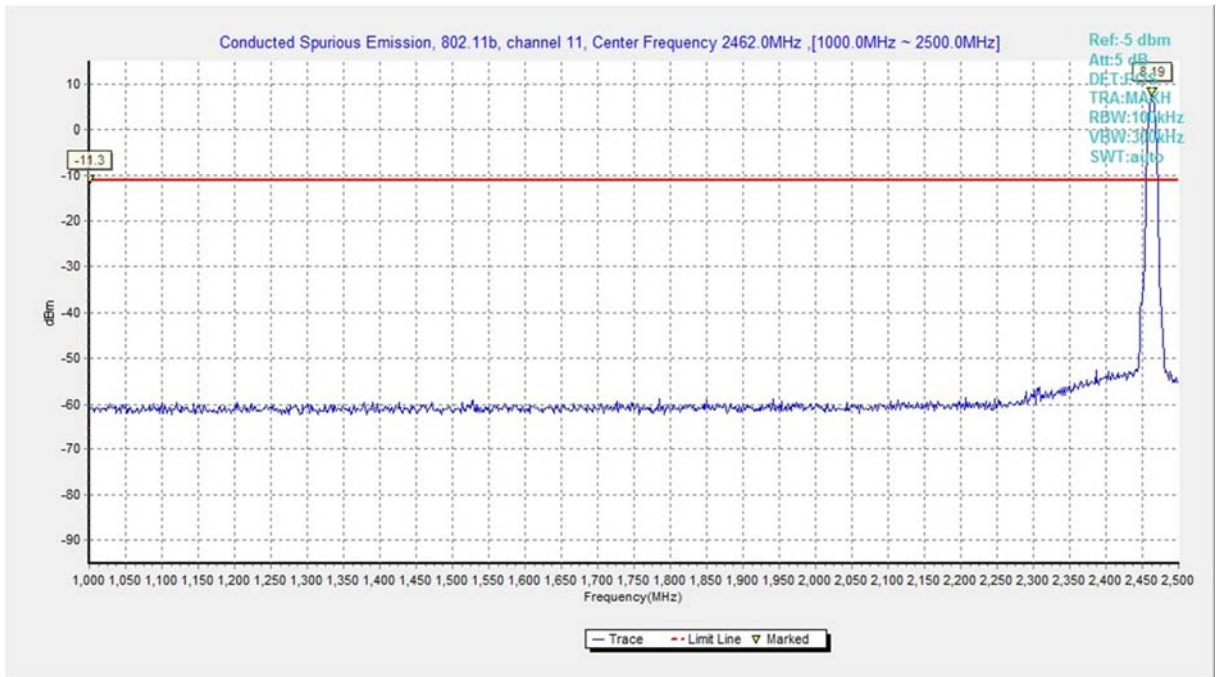


**Fig.A.6.1.19 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 1 GHz-2.5 GHz)**

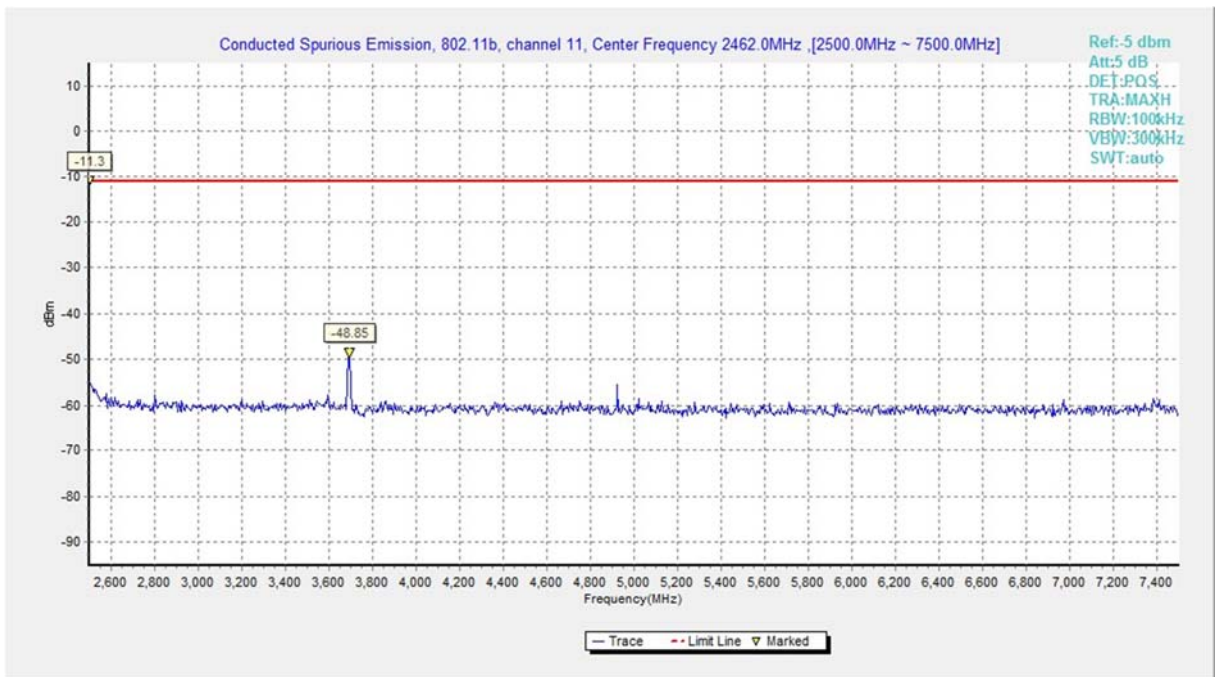


**Fig.A.6.1.20 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 2.5 GHz-7.5 GHz)**

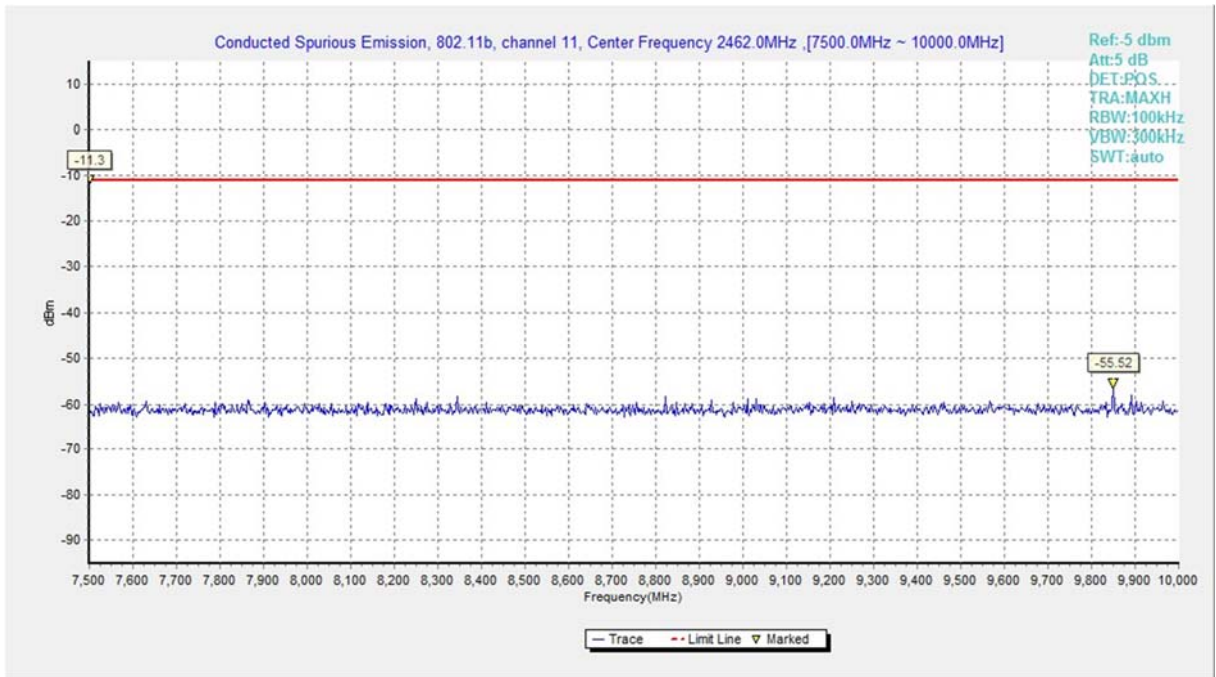


**Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 7.5 GHz-10 GHz)**

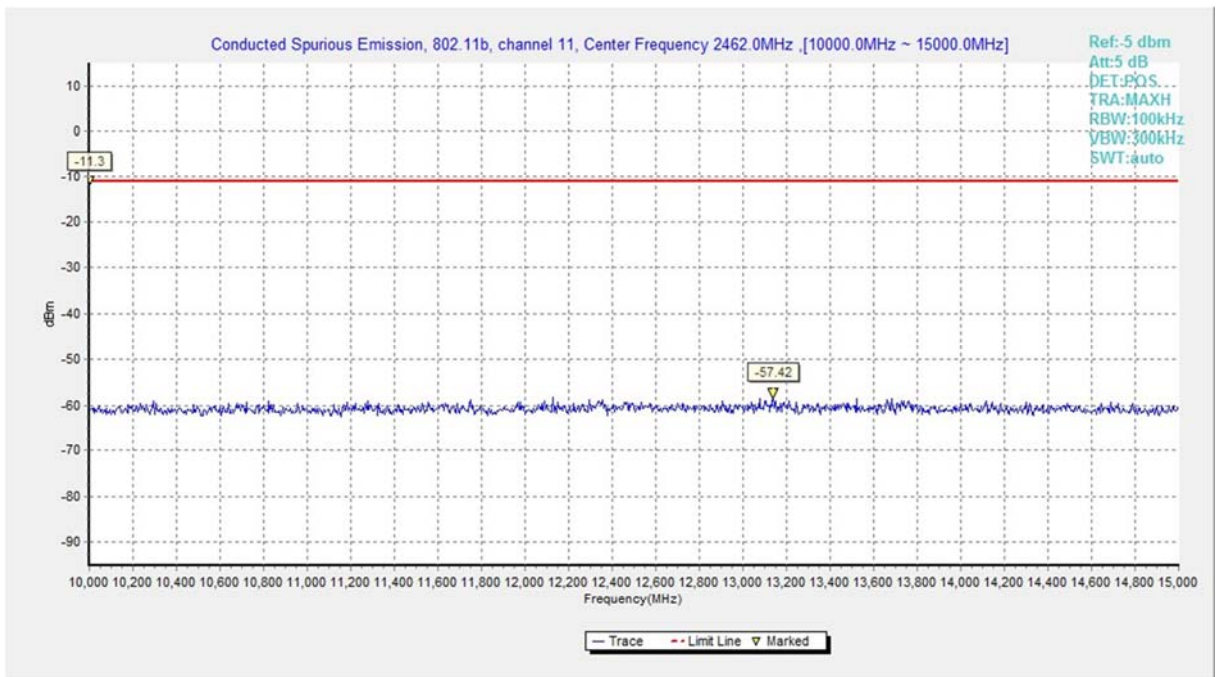

**Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 10 GHz-15 GHz)**

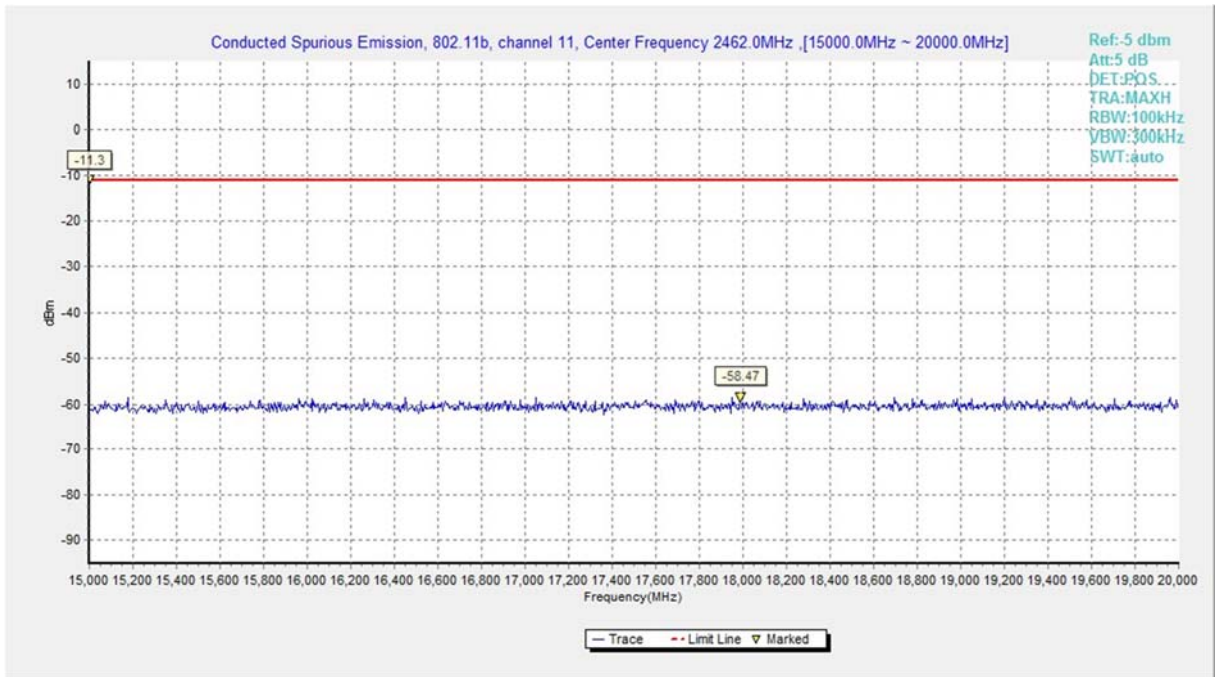

**Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 15 GHz-20 GHz)**

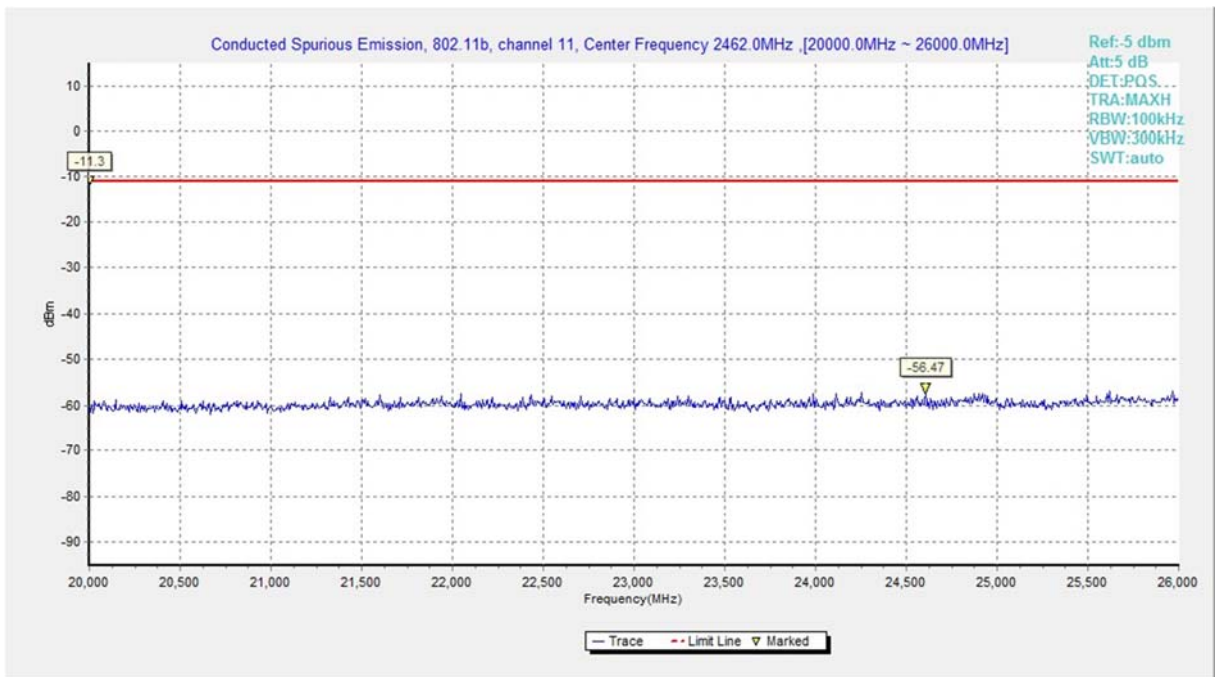

**Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 20 GHz-26 GHz)**



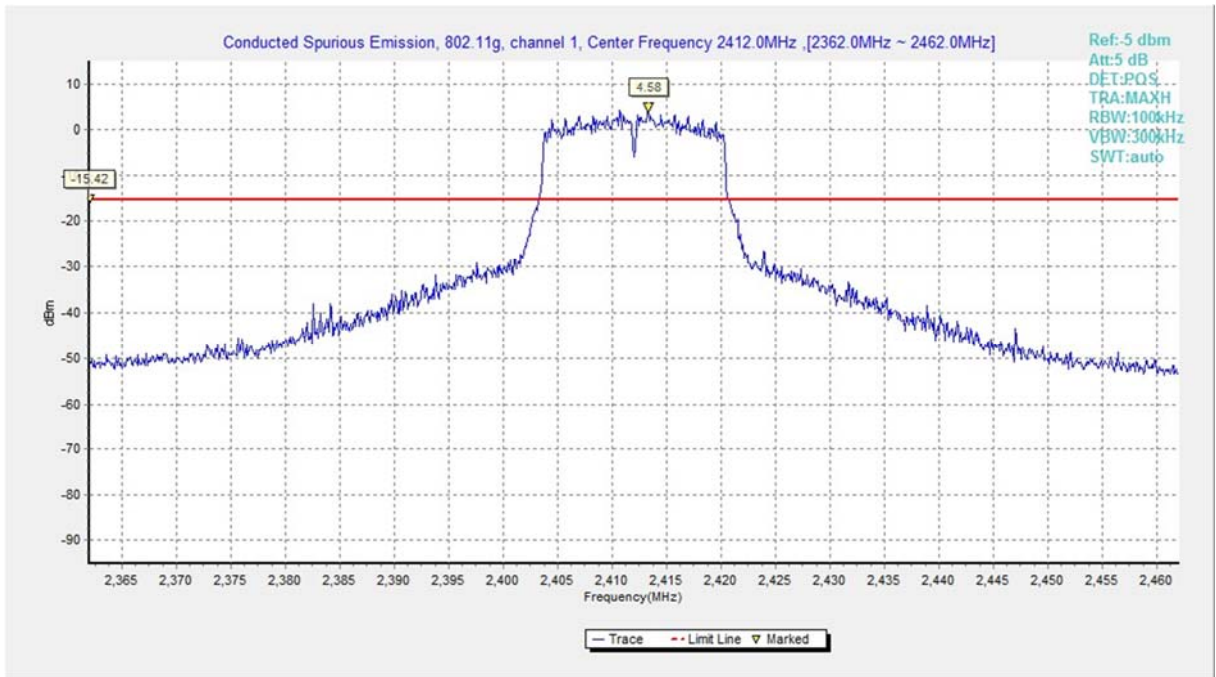


Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)



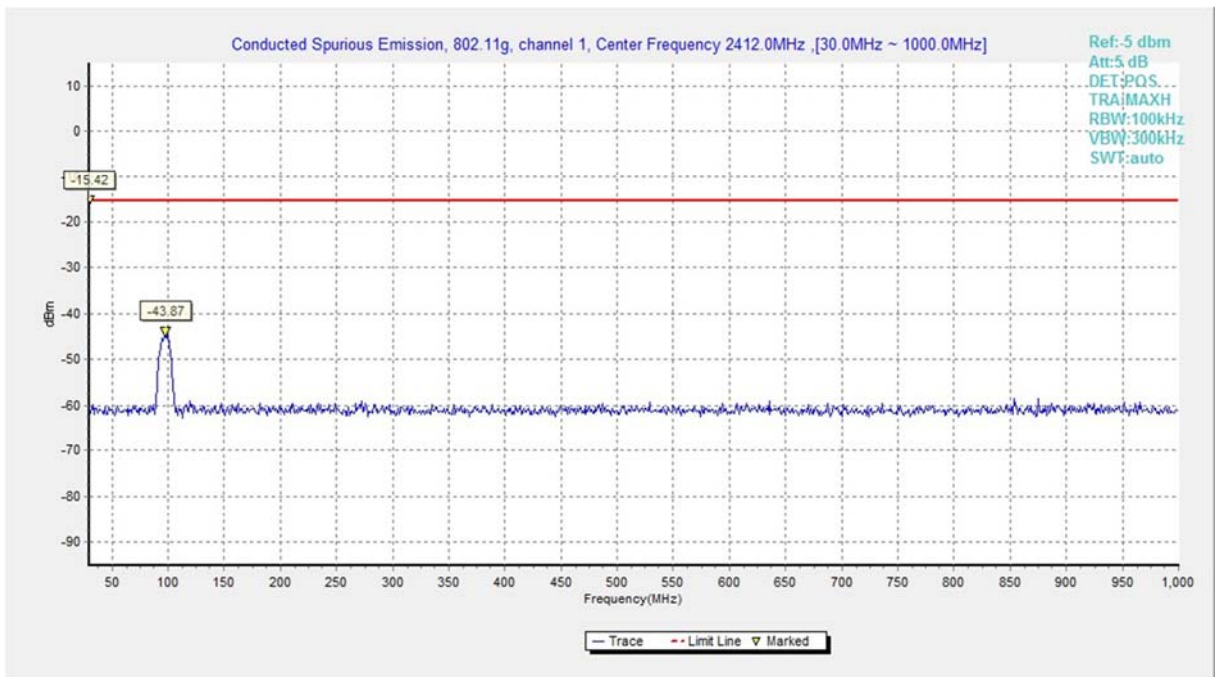



Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)

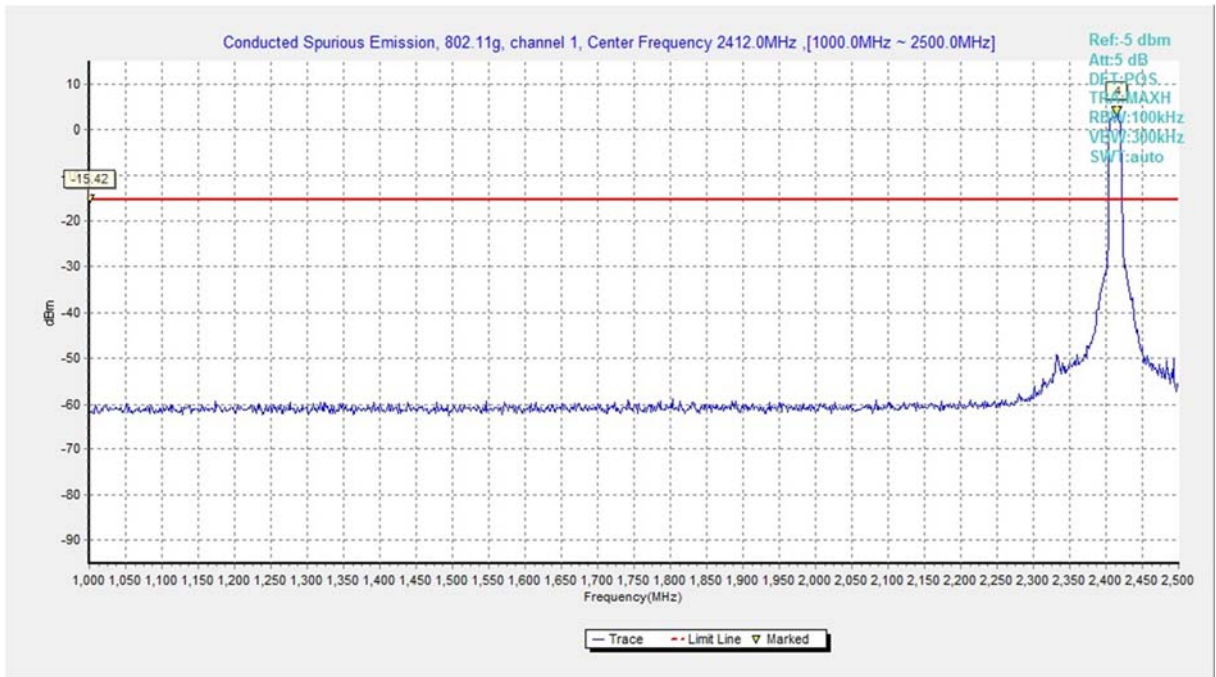


**Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-2.5 GHz)**

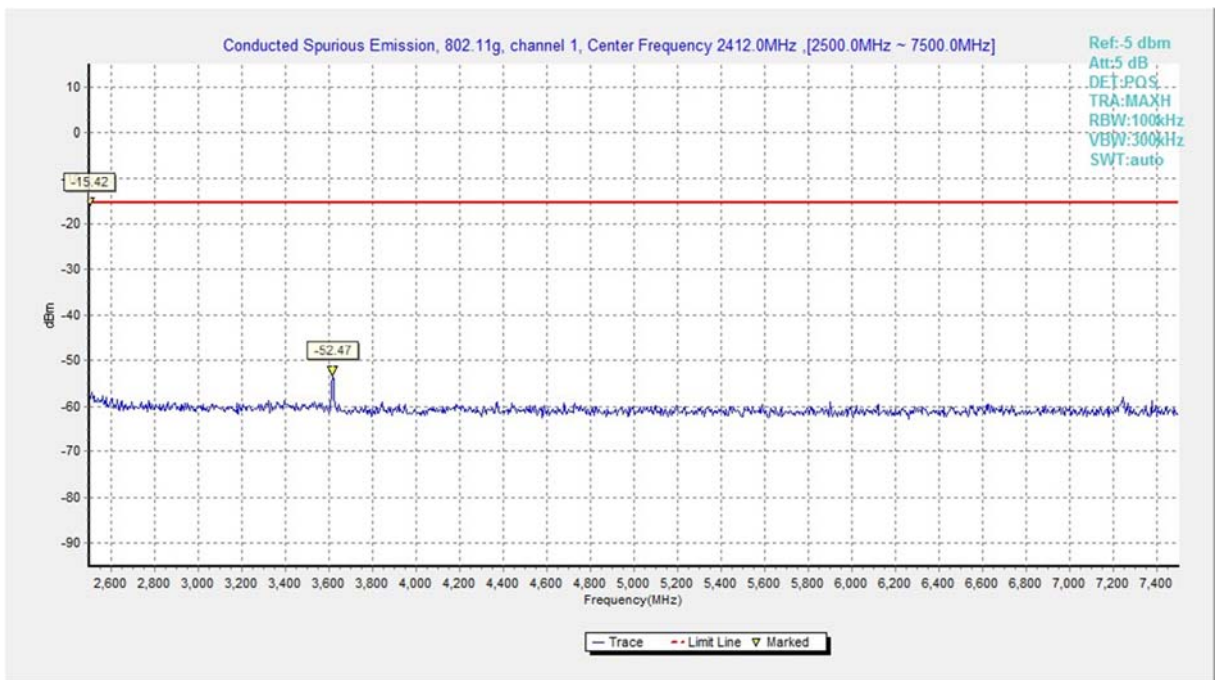

**Fig.A.6.1.28 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 2.5 GHz-7.5 GHz)**

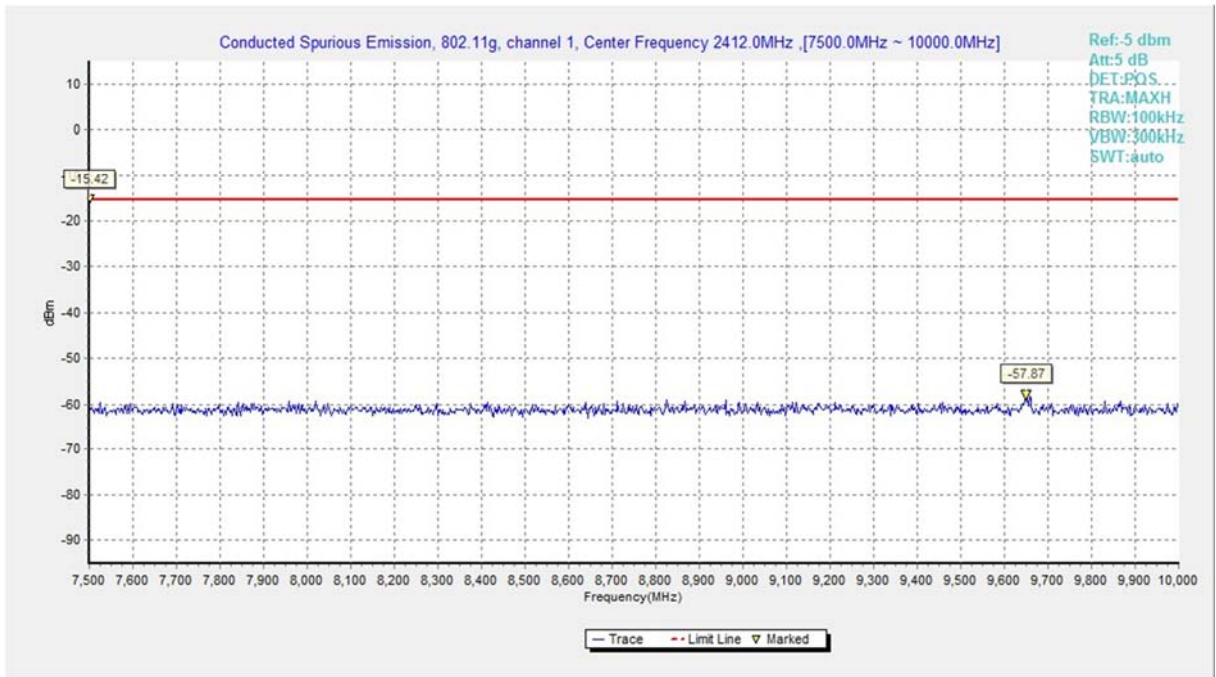


**Fig.A.6.1.29 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 7.5 GHz-10 GHz)**

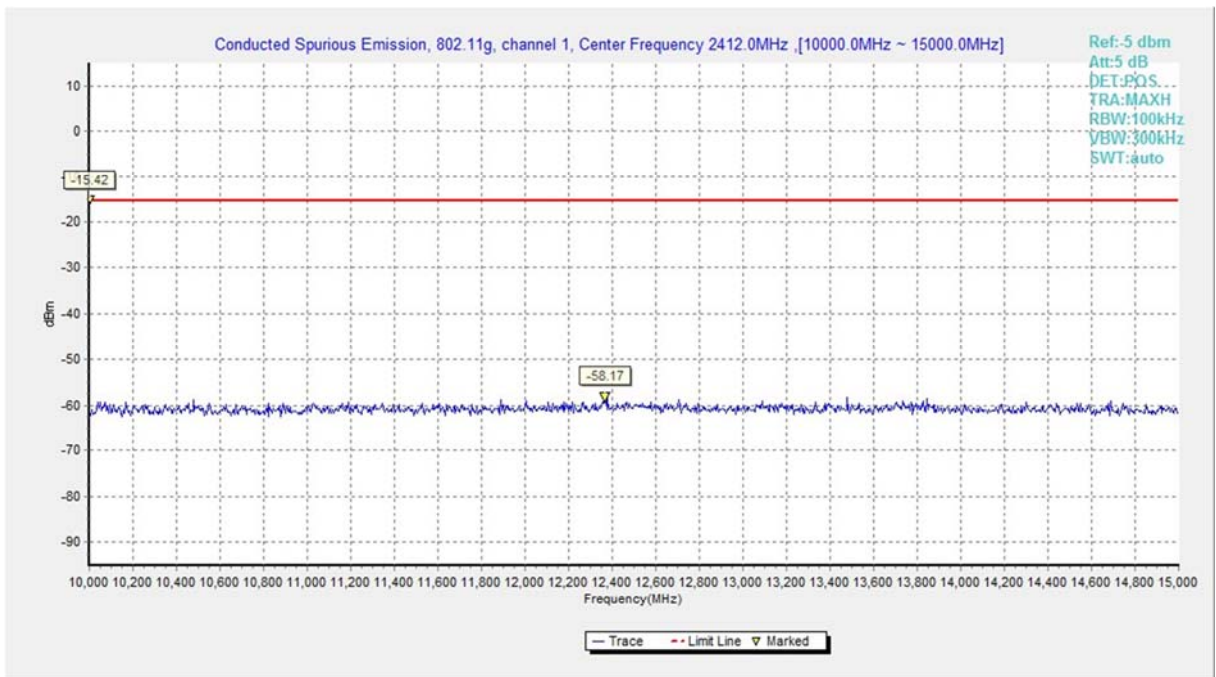


**Fig.A.6.1.30 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 10 GHz-15 GHz)**




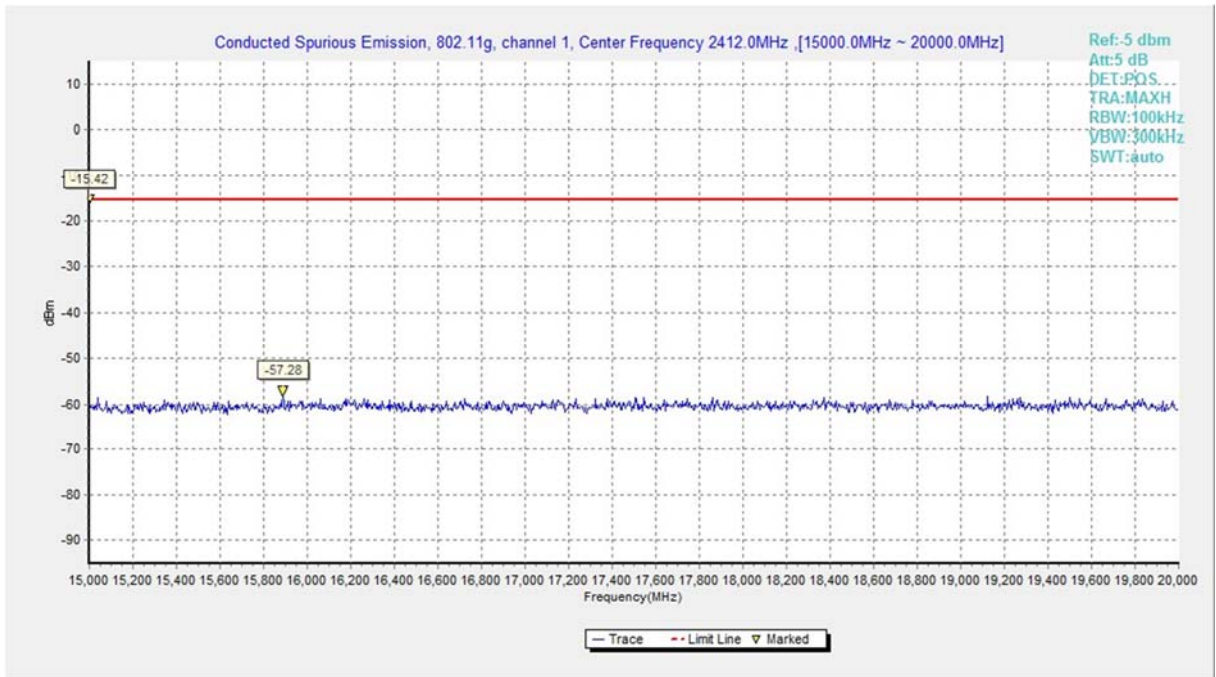


**Fig.A.6.1.31 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 15 GHz-20 GHz)**

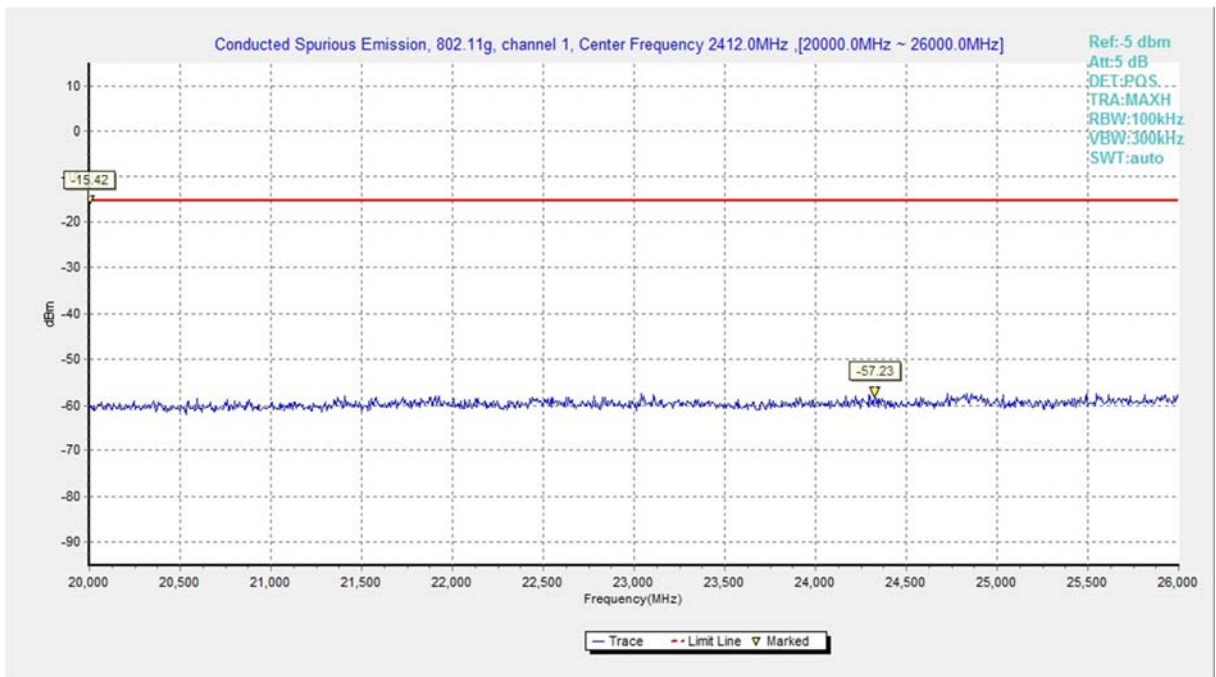

**Fig.A.6.1.32 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 20 GHz-26 GHz)**

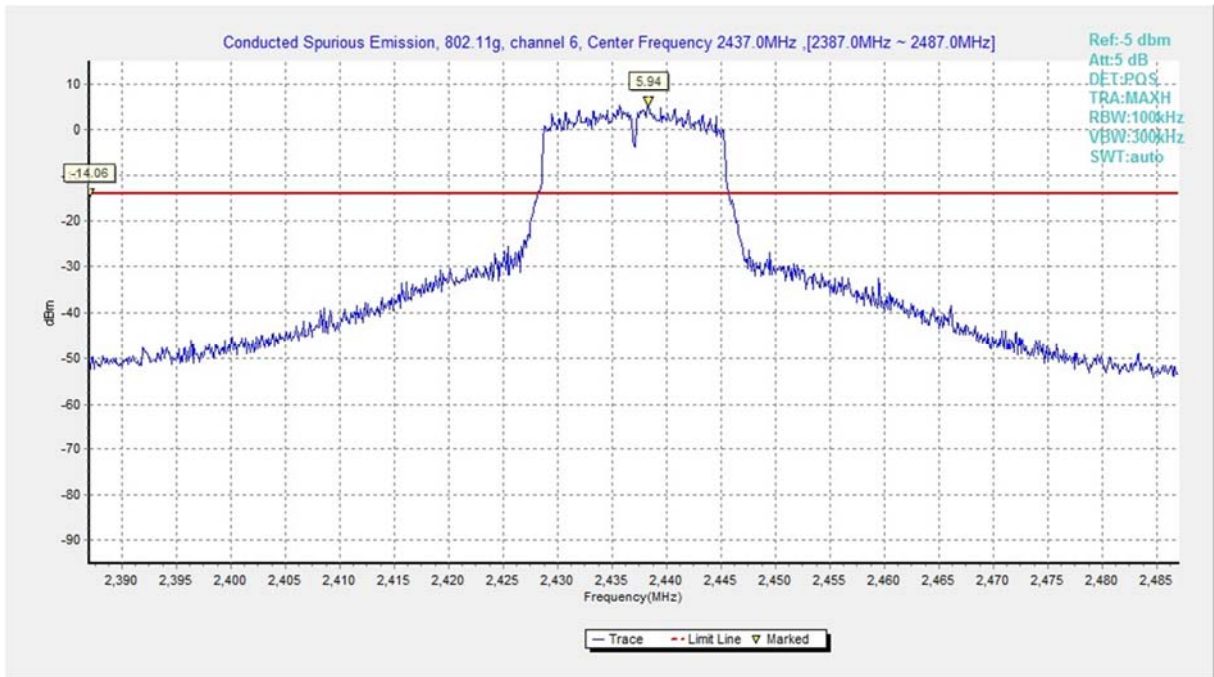

**Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)**

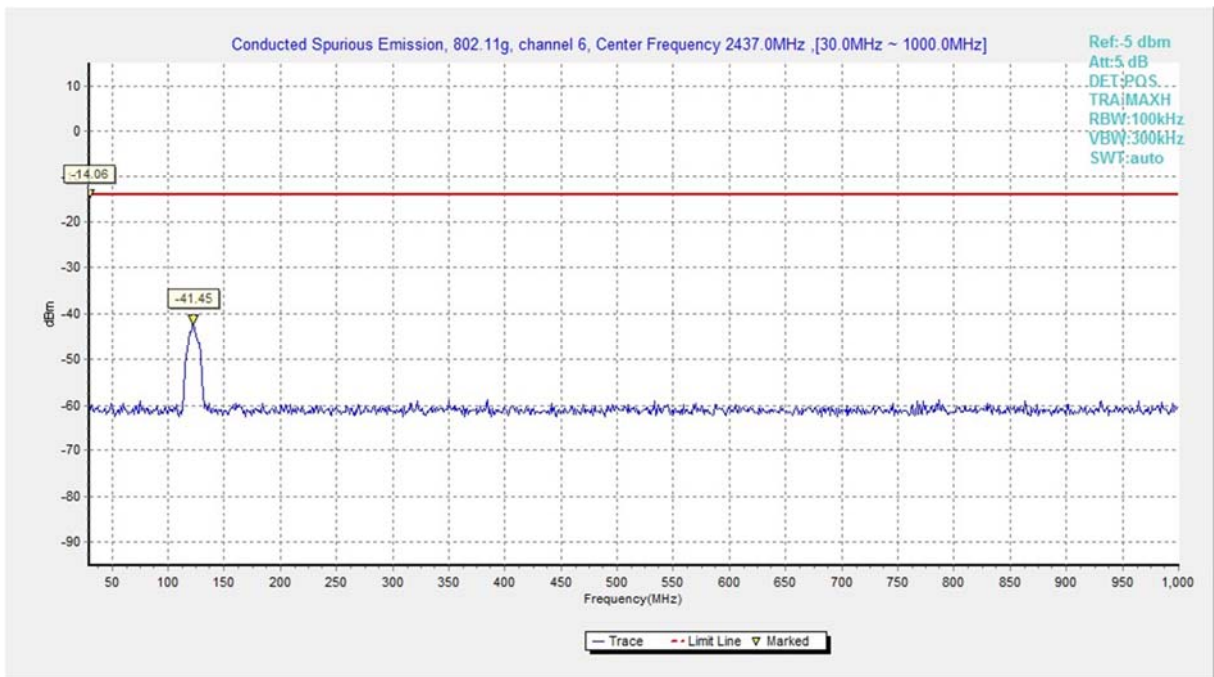

**Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)**

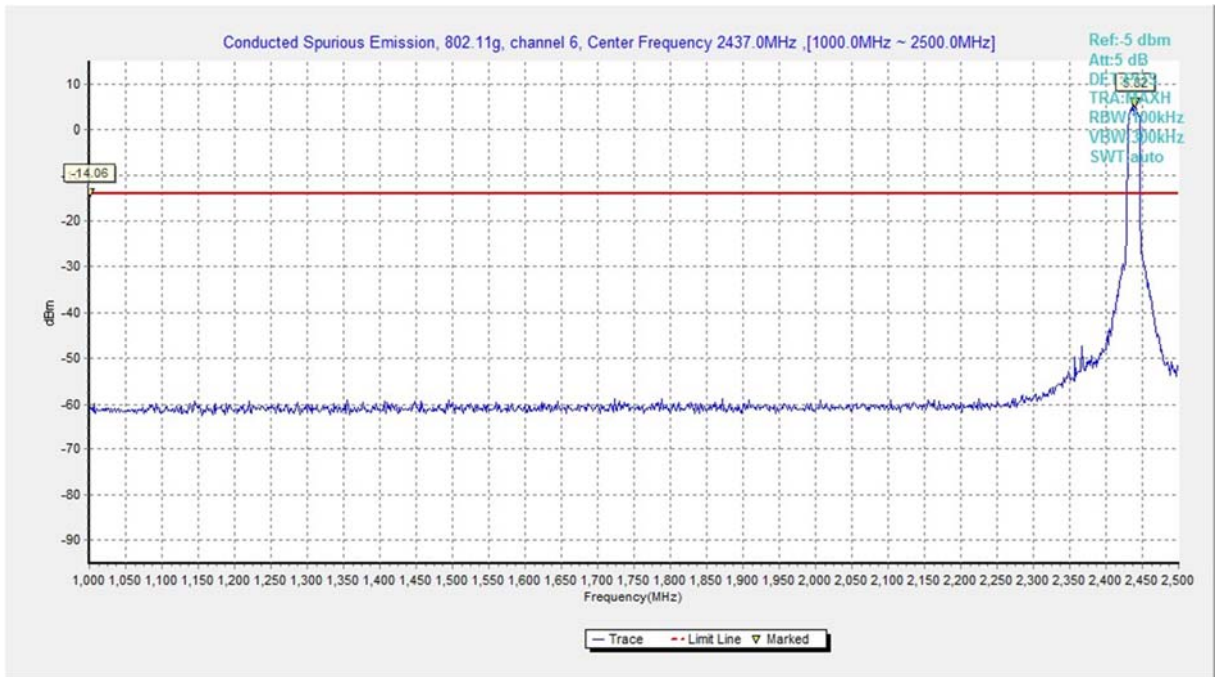


Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-2.5 GHz)



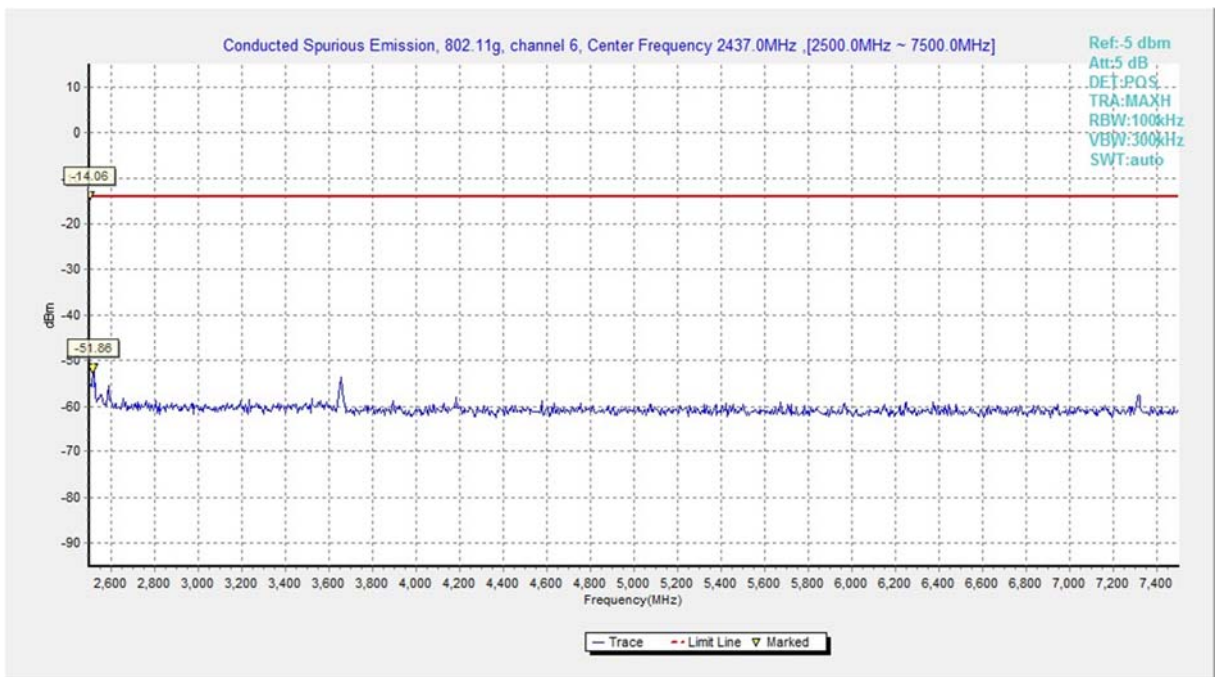


Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 2.5 GHz-7.5 GHz)




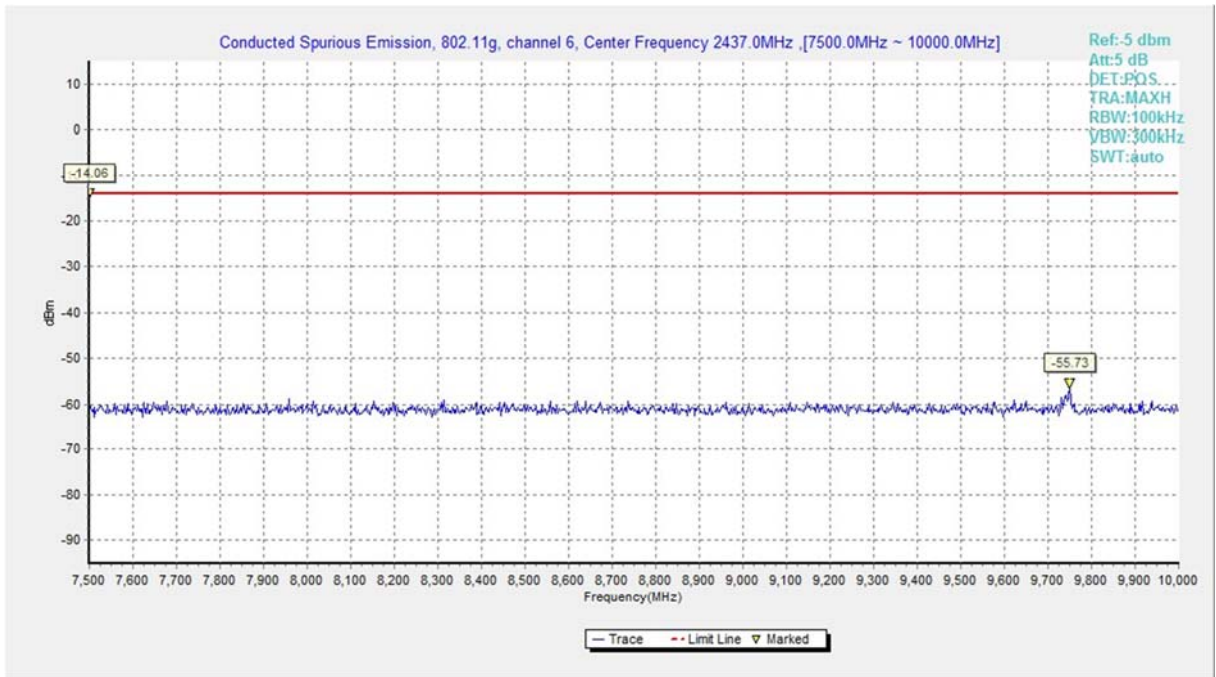


**Fig.A.6.1.37 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 7.5 GHz-10 GHz)**

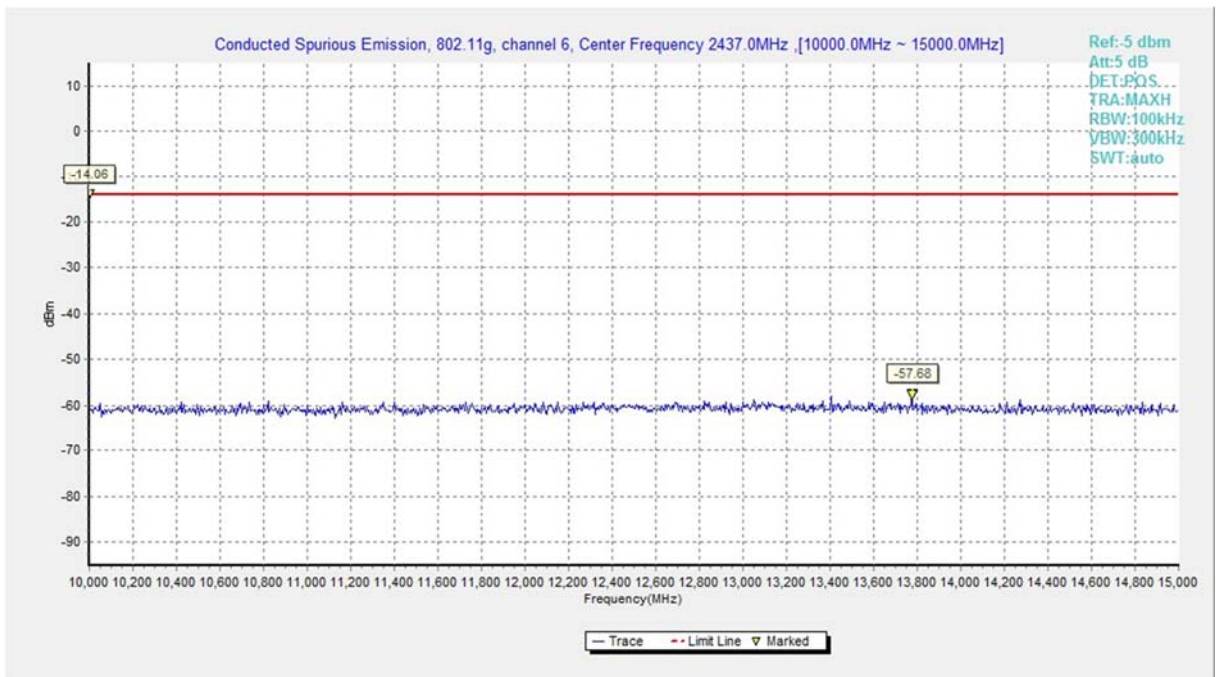


**Fig.A.6.1.38 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 10 GHz-15 GHz)**

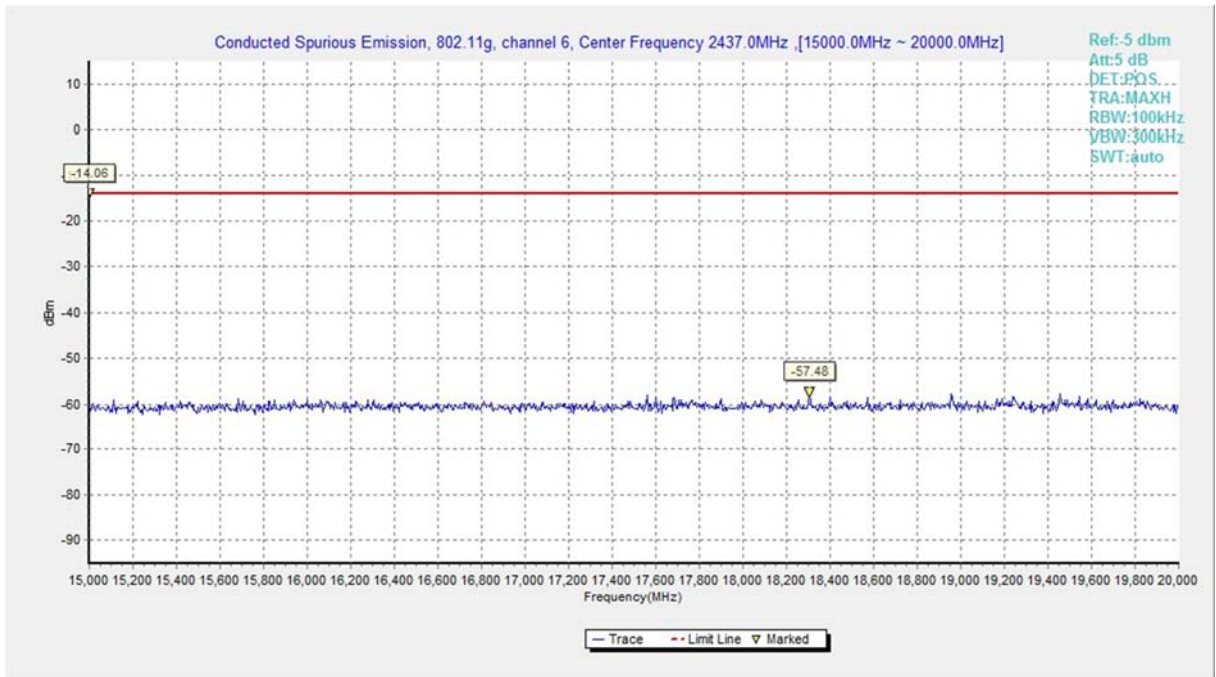


**Fig.A.6.1.39 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 15 GHz-20 GHz)**

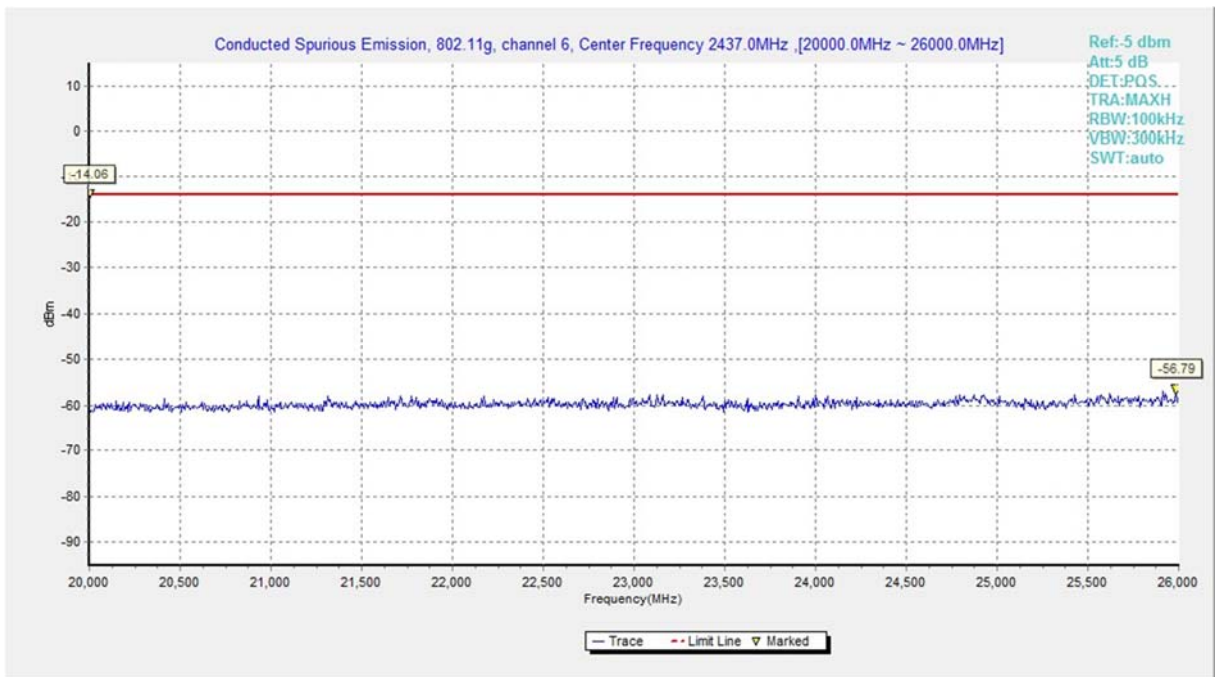

**Fig.A.6.1.40 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 20 GHz-26 GHz)**

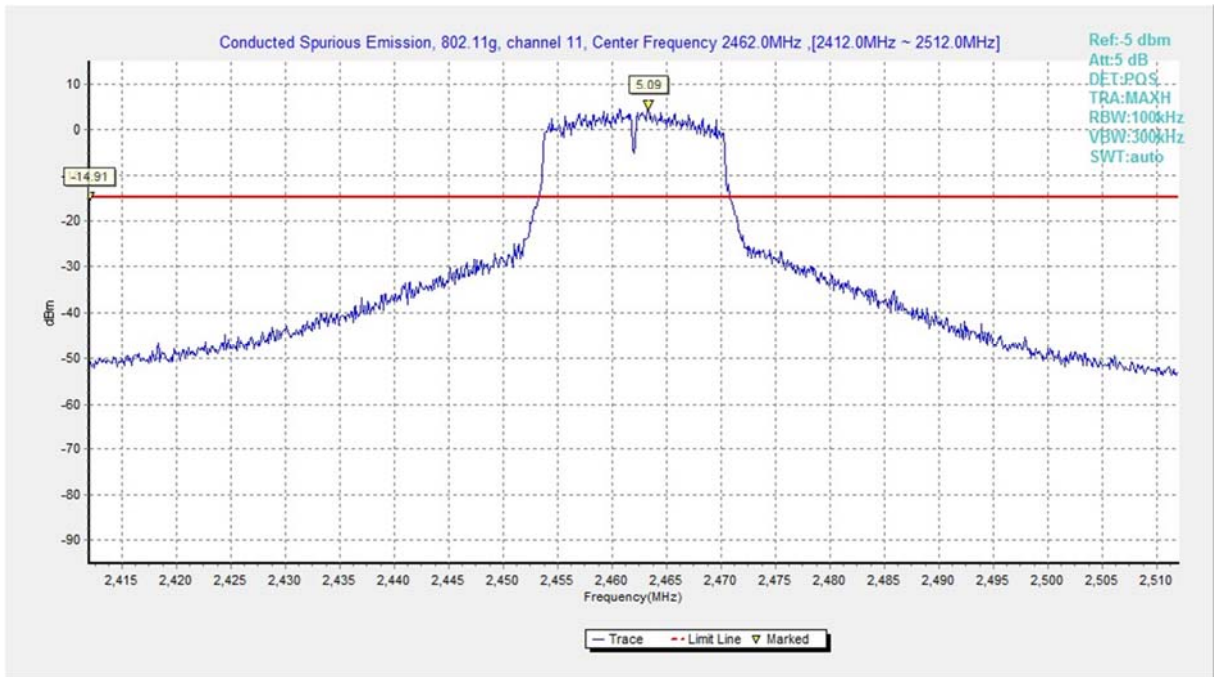


**Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)**

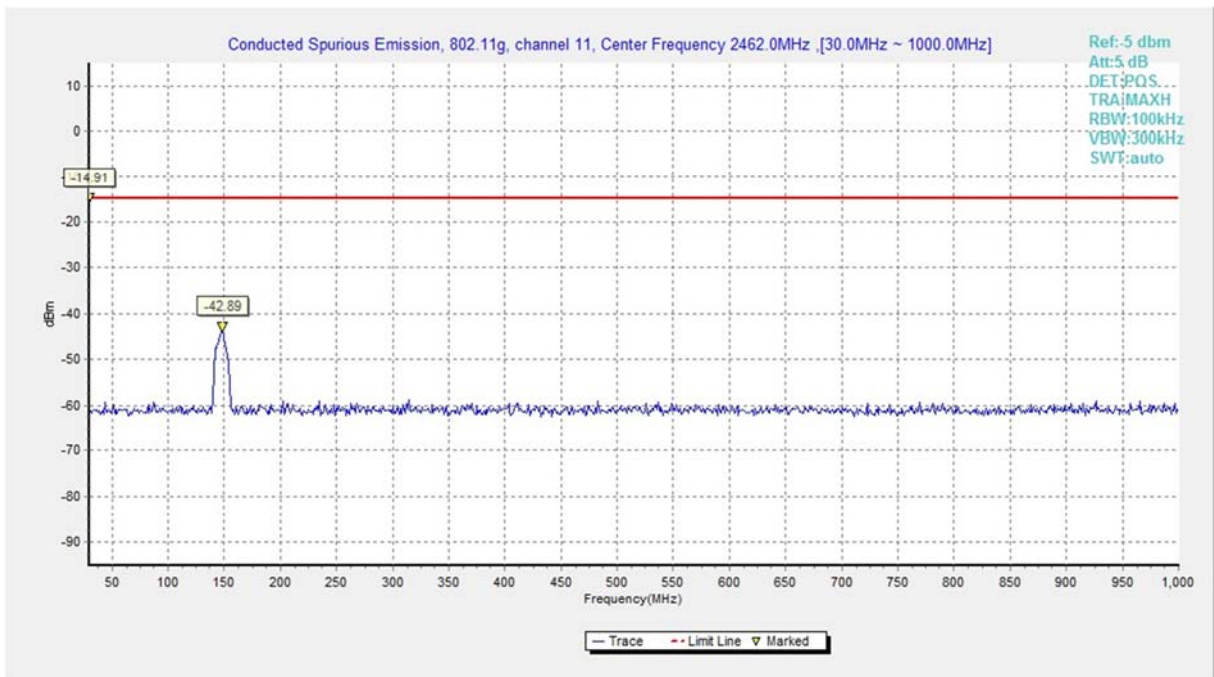


**Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)**




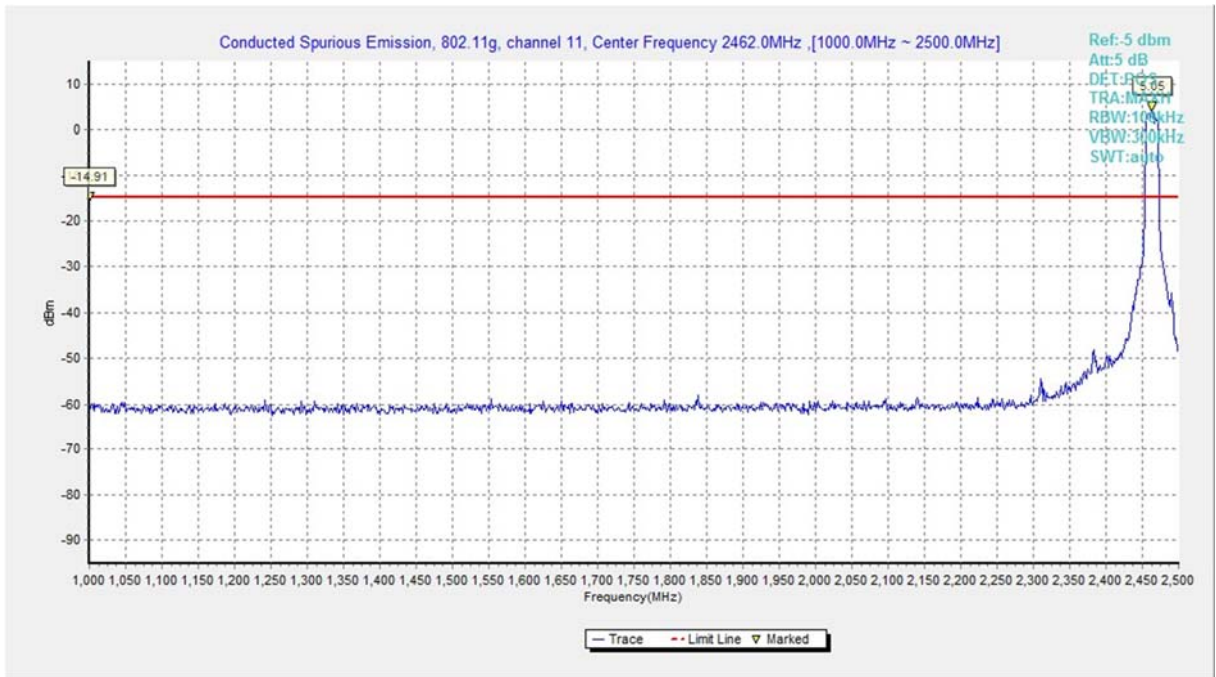


**Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)**

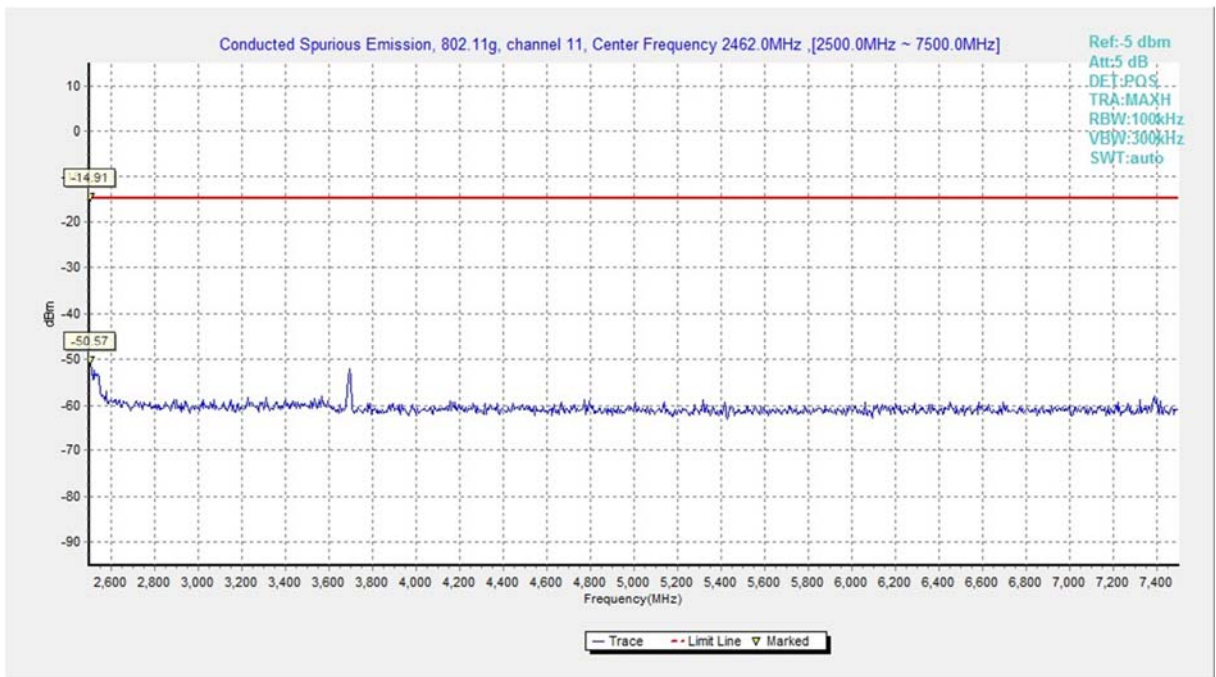

**Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)**

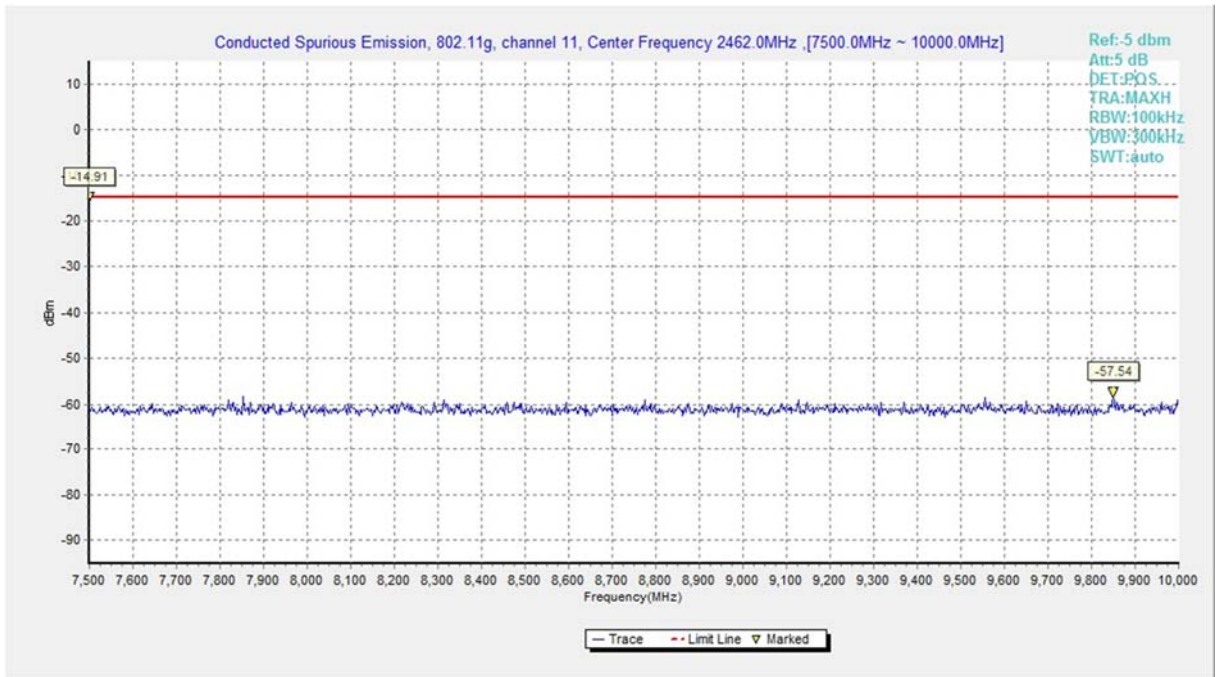


**Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)**

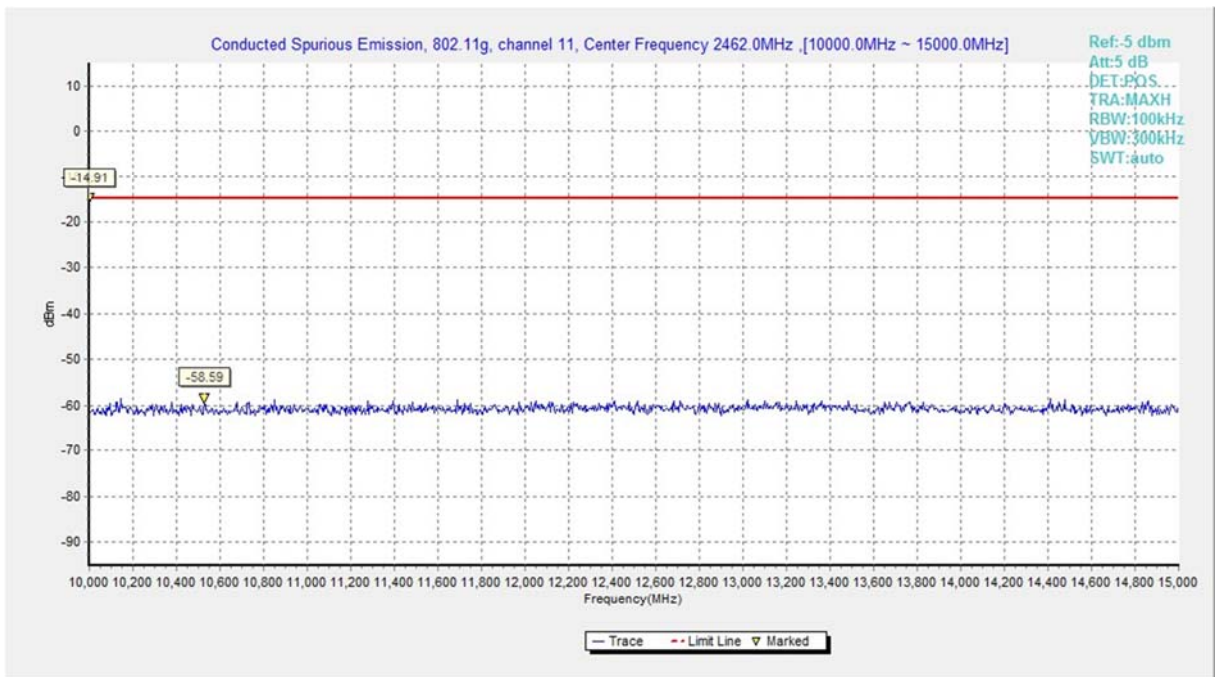


**Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)**




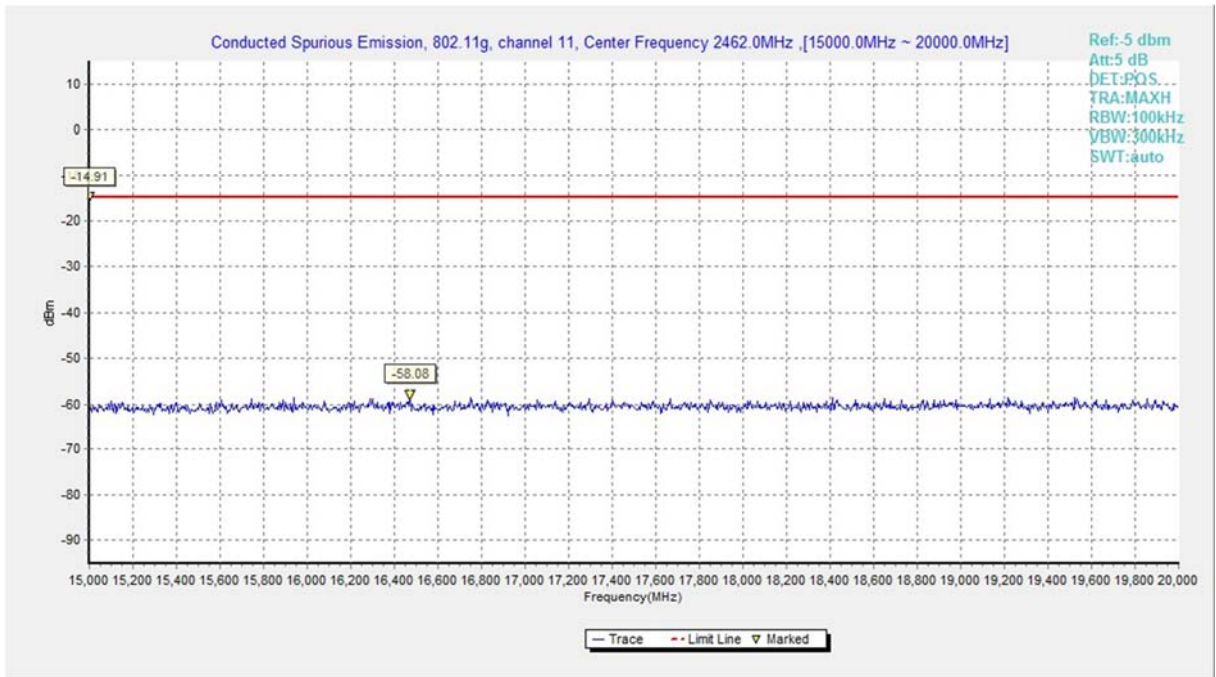


**Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)**

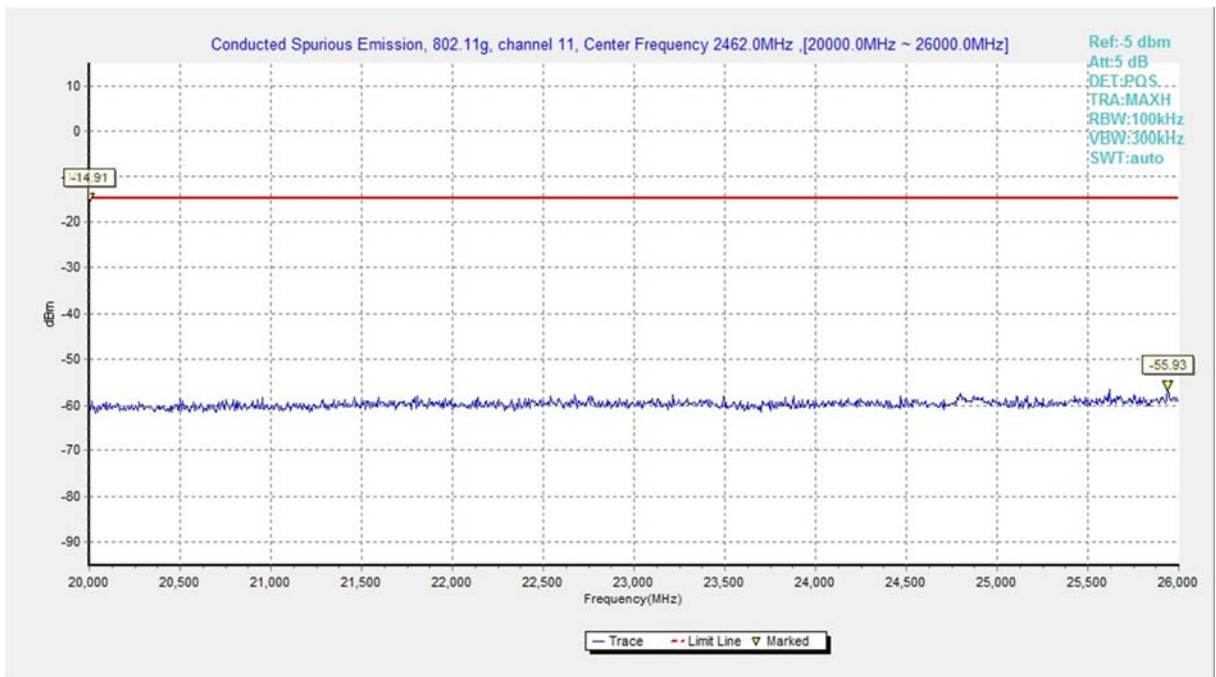

**Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)**

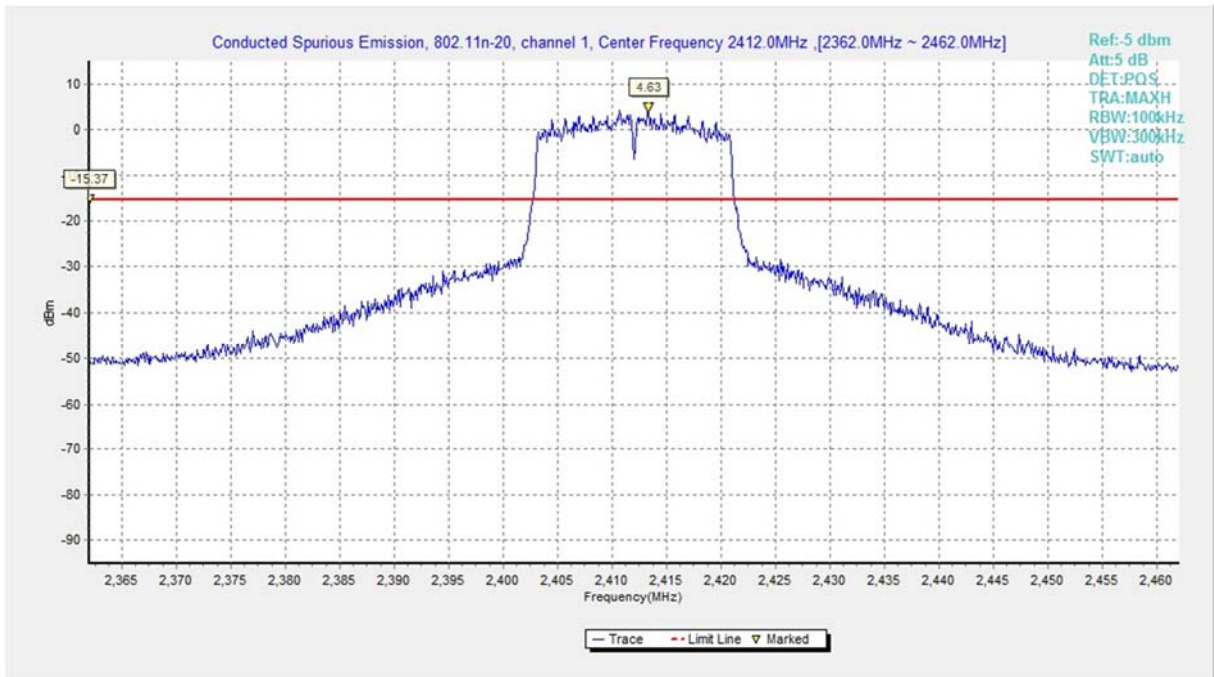

**Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)**

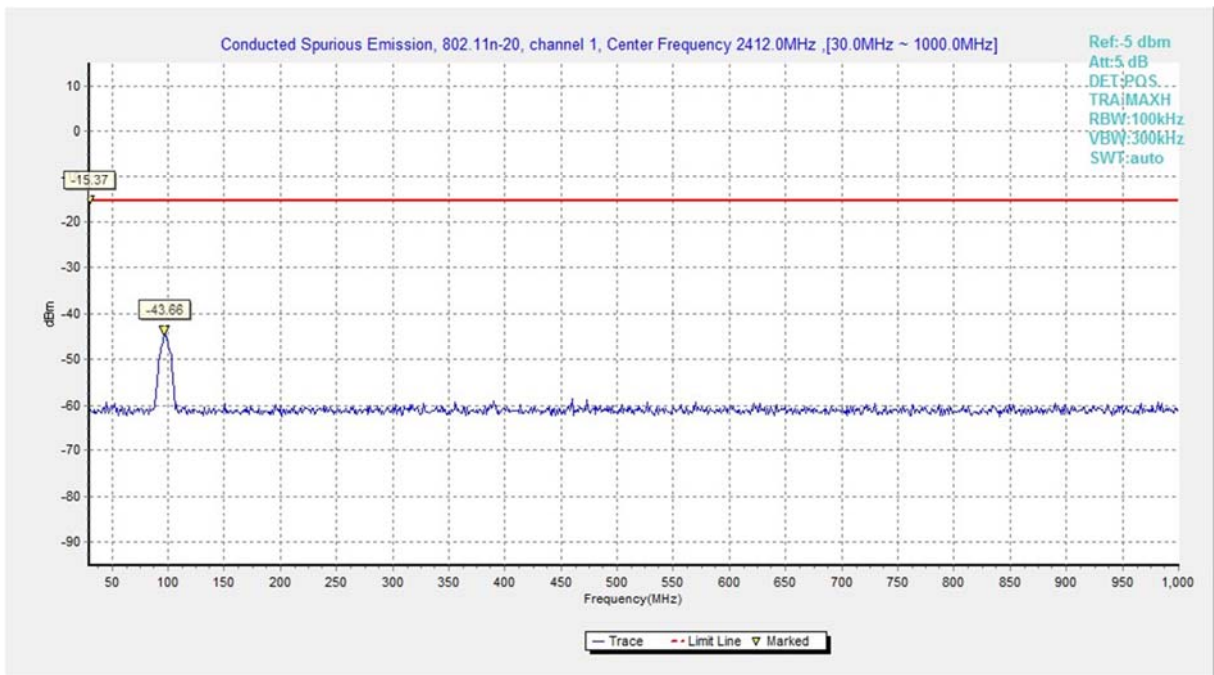

**Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)**