



# FCC TEST REPORT

**REPORT NO.:** RF921204R02E  
**MODEL NO.:** XWL-11GCAG  
**RECEIVED:** NA  
**TESTED:** Nov. 27 ~ Dec. 9, 2003

**APPLICANT:** X-Micro Technology Corp.

**ADDRESS:** 13F-4, No. 738, Chung Cheng Rd., Chung Ho City, Taipei Hsien, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST .....	9
4	TEST TYPES AND RESULTS .....	10
4.1	CONDUCTED EMISSION MEASUREMENT .....	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	10
4.1.2	TEST INSTRUMENTS.....	10
4.1.3	TEST PROCEDURES .....	11
4.1.4	DEVIATION FROM TEST STANDARD .....	11
4.1.5	TEST SETUP.....	12
4.1.6	EUT OPERATING CONDITIONS .....	12
4.1.7	TEST RESULTS .....	13
4.2	RADIATED EMISSION MEASUREMENT .....	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
4.2.2	TEST INSTRUMENTS.....	20
4.2.3	TEST PROCEDURES .....	21
4.2.4	DEVIATION FROM TEST STANDARD .....	21
4.2.5	TEST SETUP.....	22
4.2.6	EUT OPERATING CONDITIONS .....	22
4.2.7	TEST RESULTS .....	23
4.2.8	TEST RESULTS (A) .....	24
4.2.9	TEST RESULTS (B) .....	27
4.3	6dB BANDWIDTH MEASUREMENT.....	31
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	31
4.3.2	TEST INSTRUMENTS.....	31
4.3.3	TEST PROCEDURE.....	31
4.3.4	DEVIATION FROM TEST STANDARD .....	32
4.3.5	TEST SETUP.....	32
4.3.6	EUT OPERATING CONDITIONS .....	32
4.3.7	TEST RESULTS (A) .....	33
4.3.8	TEST RESULTS (B) .....	37
4.4	MAXIMUM PEAK OUTPUT POWER .....	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	43



4.4.2	TEST INSTRUMENTS.....	43
4.4.3	TEST PROCEDURES .....	44
4.4.4	DEVIATION FROM TEST STANDARD .....	44
4.4.5	TEST SETUP.....	44
4.4.6	EUT OPERATING CONDITIONS .....	44
4.4.7	TEST RESULTS (A) .....	45
4.4.8	TEST RESULTS (B) .....	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.2	TEST INSTRUMENTS.....	47
4.5.3	TEST PROCEDURE.....	47
4.5.4	DEVIATION FROM TEST STANDARD .....	48
4.5.5	TEST SETUP.....	48
4.5.6	EUT OPERATING CONDITIONS .....	48
4.5.7	TEST RESULTS (A) .....	49
4.5.8	TEST RESULTS (B) .....	53
4.6	BAND EDGES MEASUREMENT .....	59
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	59
4.6.2	TEST INSTRUMENTS.....	59
4.6.3	TEST PROCEDURE.....	59
4.6.4	DEVIATION FROM TEST STANDARD .....	59
4.6.5	EUT OPERATING CONDITION .....	60
4.6.6	TEST RESULTS (A) .....	60
4.6.7	TEST RESULTS (B) .....	63
4.7	ANTENNA REQUIREMENT .....	68
4.7.1	STANDARD APPLICABLE .....	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	68
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	69
6	INFORMATION ON THE TESTING LABORATORIES .....	71



# 1 CERTIFICATION

**PRODUCT :** X-Micro WLAN 11g PCI Card  
**BRAND NAME :** X-Micro  
**MODEL NO. :** XWL-11GCAG  
**TEST ITEM :** Engineering Sample  
**APPLICANT :** X-Micro Technology Corp.  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247),  
 ANSI C63.4-2001

The above equipment (model no.: XWL-11GCAG) is identical to model no. GL2454VP-2A, which has been tested by **Advance Data Technology Corporation** from Nov. 27 ~ Dec. 9, 2003, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Rennie Wang , **DATE :** Aug. 30, 2004  
 Rennie Wang

**APPROVED BY :** Cody Chang , **DATE :** Aug. 30, 2004  
 Cody Chang  
 Deputy Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.26dB at 20.86MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.91dB at 2387.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

**NOTE:** The information of measurement uncertainty is available upon the customer's request.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	X-Micro WLAN 11g PCI Card
<b>MODEL NO.</b>	XWL-11GCAG
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TYPE</b>	BPSK, QPSK, CCK, 16QAM, 64QAM
<b>RADIO TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps (Turbo mode : up to 108Mbps)
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>MAXIMUM OUTPUT POWER</b>	19.02dBm
<b>ANTENNA TYPE</b>	Dipole antenna
<b>ANTENNA GAIN</b>	2dBi
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. This report is issued as a duplicate report to the original ADT report no. RF921204R02. The differences are changing the model, brand, product name and applicant.
2. Fully compatible with the 802.11g standard to provide a wireless data rate of up to 54Mbps.
3. This EUT is capable of providing data rates up to 108Mbps in turbo mode.
4. Backwards compatible with the 802.11b standard to provide a wireless data rate of up to 11Mbps.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



**3.2 DESCRIPTION OF TEST MODES**

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. One turbo mode was presented at frequency 2437MHz.
5. Two test results were presented in the following sections, the test result A is for CCK technique and the test result B is for OFDM technique.

**3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a X-Micro WLAN 11g PCI Card . According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**  
**ANSI C63.4:2001**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	MSI	Hetis 865G Giga	1A36I98A000220	FCC DoC Approved
2	MONITOR	SONY	CPD-G520	2402885	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY017070	FCC DoC Approved
4	MODEM	ACEEX	1414	980020514	IFAXDM1414
5	PS2/KEYBOARD	HP	SK-2502C	M020303720	FCC DoC Approved
6	PS/2 MOUSE	BTC	M851	N/A	E5XMSM860


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	NA
6	1.5 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).





**3.5 CONFIGURATION OF SYSTEM UNDER TEST**

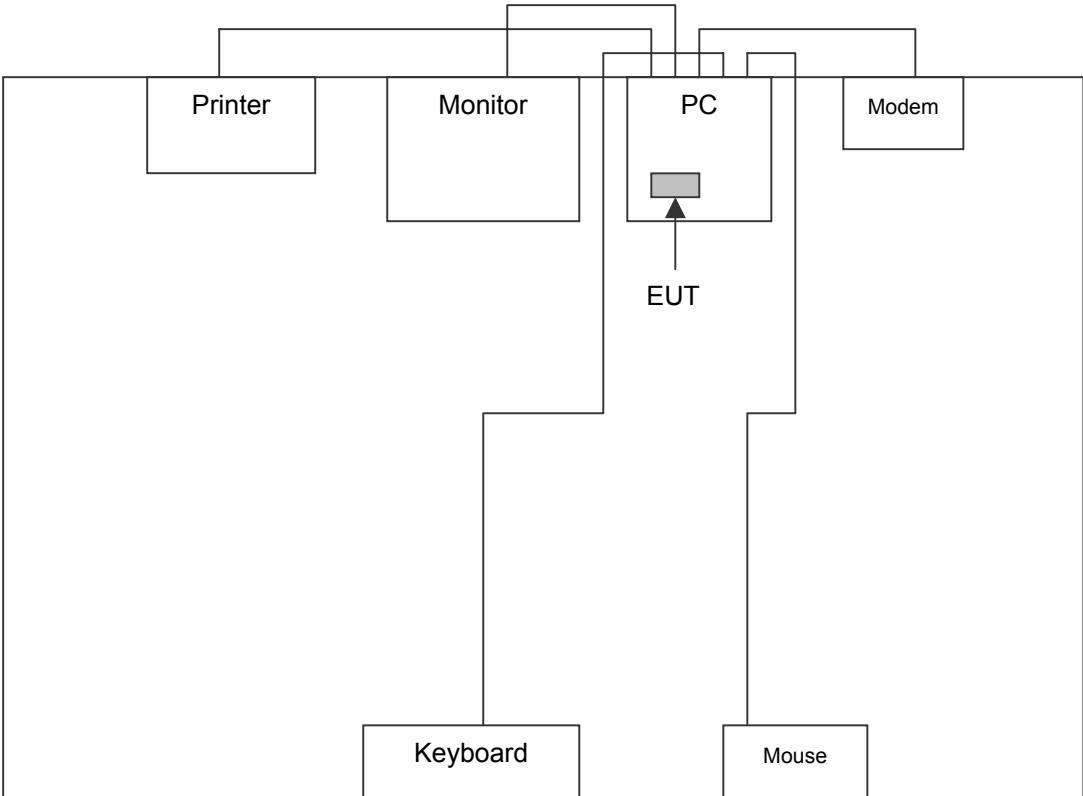



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 19 2004
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 19 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. "\*": These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 10.
  4. The VCCI Site Registration No. is C-1312.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels Limit -20dB was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

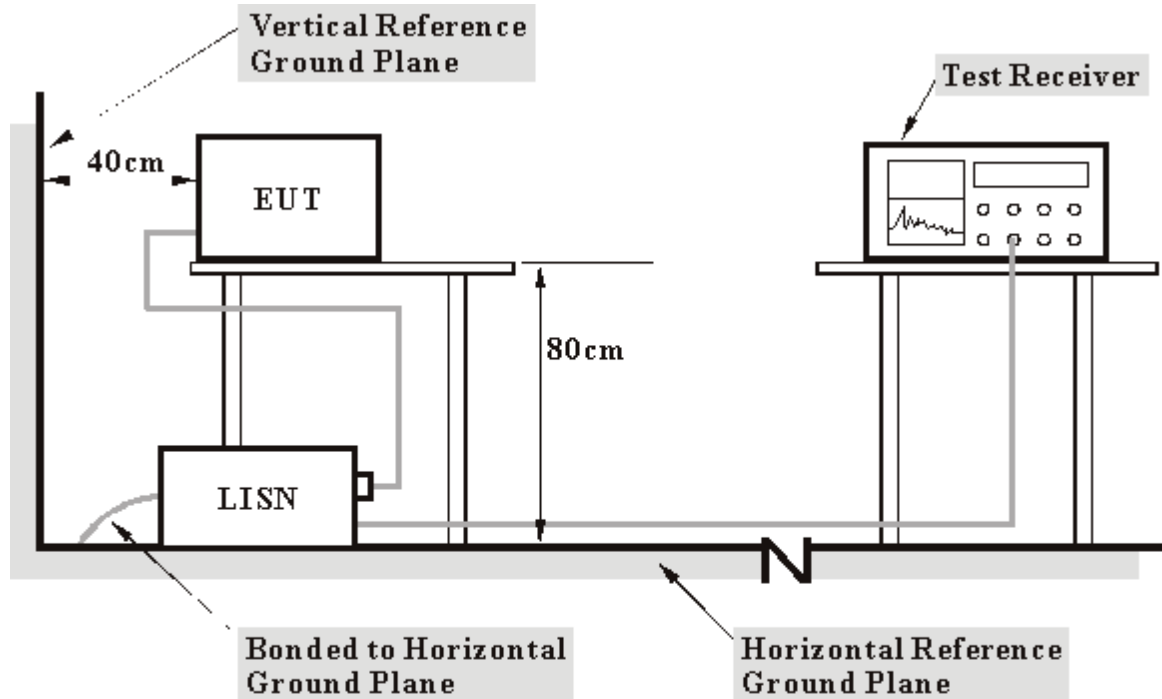

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT a personal computer system placed on a testing table.
- b. The computer system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeat c~ e.




4.1.7 TEST RESULTS

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.06	42.30	-	42.36	-	64.25
2	0.431	0.07	35.78	-	35.85	-	57.23	47.23	-21.38	-
3	0.677	0.11	35.43	-	35.54	-	56.00	46.00	-20.46	-
4	1.664	0.17	35.48	-	35.65	-	56.00	46.00	-20.35	-
5	3.516	0.21	35.93	-	36.14	-	56.00	46.00	-19.86	-
<b>6</b>	<b>20.864</b>	<b>0.68</b>	<b>45.06</b>	-	<b>45.74</b>	-	<b>60.00</b>	<b>50.00</b>	<b>-14.26</b>	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

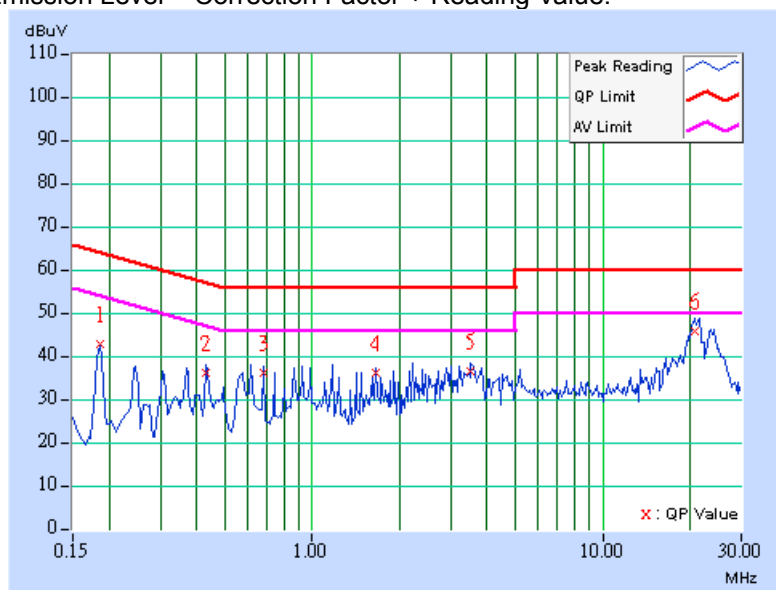




<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.05	40.98	-	41.03	-	64.25
2	0.369	0.05	41.04	-	41.09	-	58.53	48.53	-17.44	-
3	0.552	0.08	37.53	-	37.61	-	56.00	46.00	-18.39	-
4	1.355	0.17	36.35	-	36.52	-	56.00	46.00	-19.48	-
5	3.759	0.20	34.50	-	34.70	-	56.00	46.00	-21.30	-
6	21.018	0.55	44.53	-	45.08	-	60.00	50.00	-14.92	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

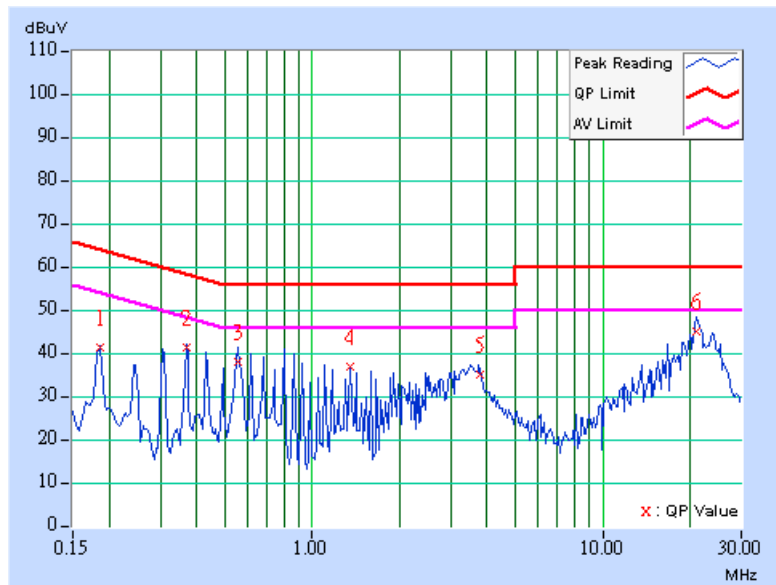




<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.06	42.32	-	42.38	-	64.25
2	0.373	0.06	34.71	-	34.77	-	58.44	48.44	-23.67	-
3	0.677	0.11	34.85	-	34.96	-	56.00	46.00	-21.04	-
4	1.668	0.17	35.93	-	36.10	-	56.00	46.00	-19.90	-
5	3.582	0.21	35.36	-	35.57	-	56.00	46.00	-20.43	-
6	21.142	0.70	44.78	-	45.48	-	60.00	50.00	-14.52	-
7	23.684	0.82	42.23	-	43.05	-	60.00	50.00	-16.95	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

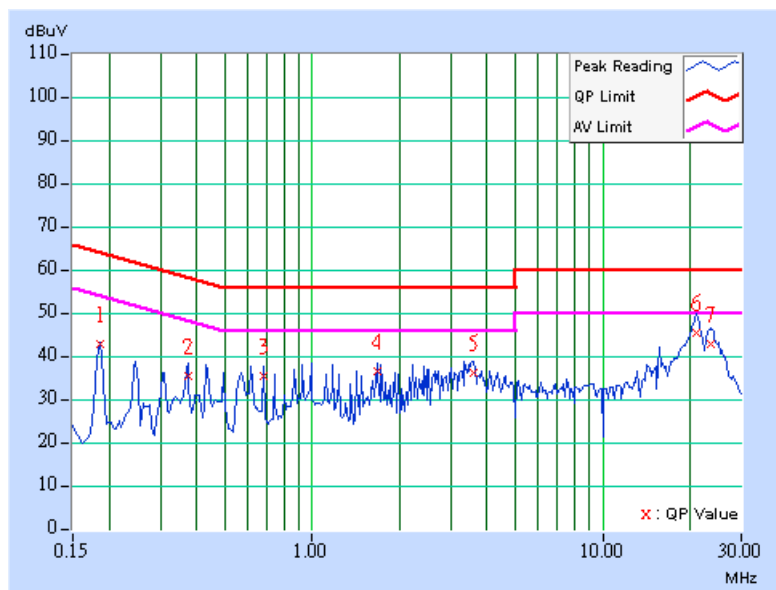




<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.05	40.68	-	40.73	-	64.25
2	0.373	0.05	41.31	-	41.36	-	58.44	48.44	-17.08	-
3	0.560	0.08	37.61	-	37.69	-	56.00	46.00	-18.31	-
4	3.529	0.20	36.32	-	36.52	-	56.00	46.00	-19.48	-
5	19.929	0.51	41.68	-	42.19	-	60.00	50.00	-17.81	-
6	23.833	0.68	41.63	-	42.31	-	60.00	50.00	-17.69	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

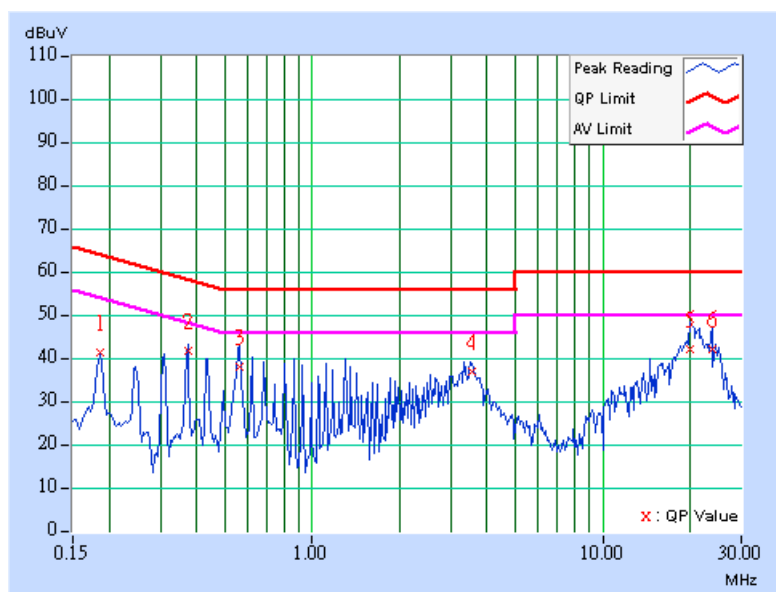






<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.185	0.06	42.08	-	42.14	-	64.25
2	0.435	0.07	35.92	-	35.99	-	57.15	47.15	-21.17	-
3	0.681	0.11	35.96	-	36.07	-	56.00	46.00	-19.93	-
4	2.418	0.19	35.48	-	35.67	-	56.00	46.00	-20.33	-
5	21.141	0.70	42.34	-	43.04	-	60.00	50.00	-16.96	-
6	23.567	0.82	41.81	-	42.63	-	60.00	50.00	-17.37	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

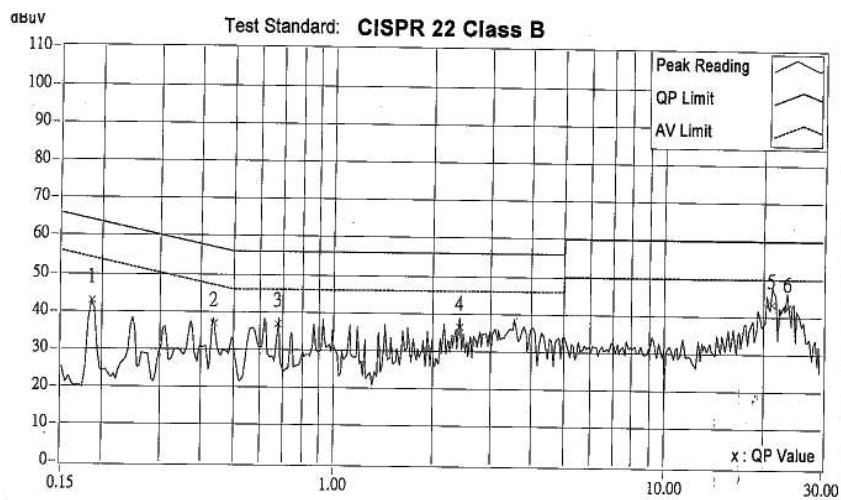




<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.05	39.88	-	39.93	-	64.25	54.25	-24.32	-
2	0.373	0.05	41.35	-	41.40	-	58.44	48.44	-17.04	-
3	0.560	0.08	37.61	-	37.69	-	56.00	46.00	-18.31	-
4	1.363	0.17	37.06	-	37.23	-	56.00	46.00	-18.77	-
5	3.340	0.20	33.36	-	33.56	-	56.00	46.00	-22.44	-
6	20.821	0.55	44.51	-	45.06	-	60.00	50.00	-14.94	-

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

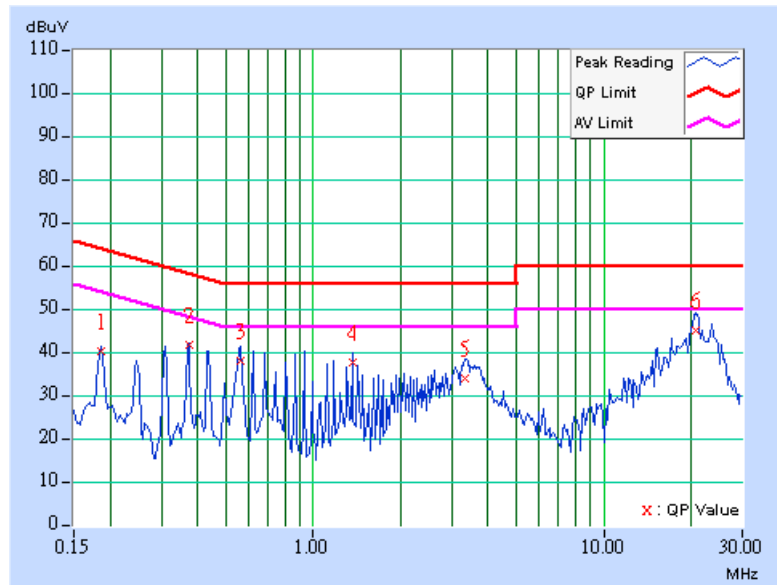



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATE UNTIL
* HP Spectrum Analyzer	8594E	3911A07465	Jul. 07, 2004
* HP Preamplifier	8447D	2432A03504	Jun. 10, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
*Schwarzbeck Antenna	VULB9168	137	Apr. 03, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	June 30, 2004
*ADT. Turn Table	TT100	0306	NA
*ADT. Tower	AT100	0306	NA
*Software	ADT_Radiated_V 5.14	NA	NA
*TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. "\*" = These equipment are used for the final measurement.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The test was performed in ADT Chamber No. 6.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

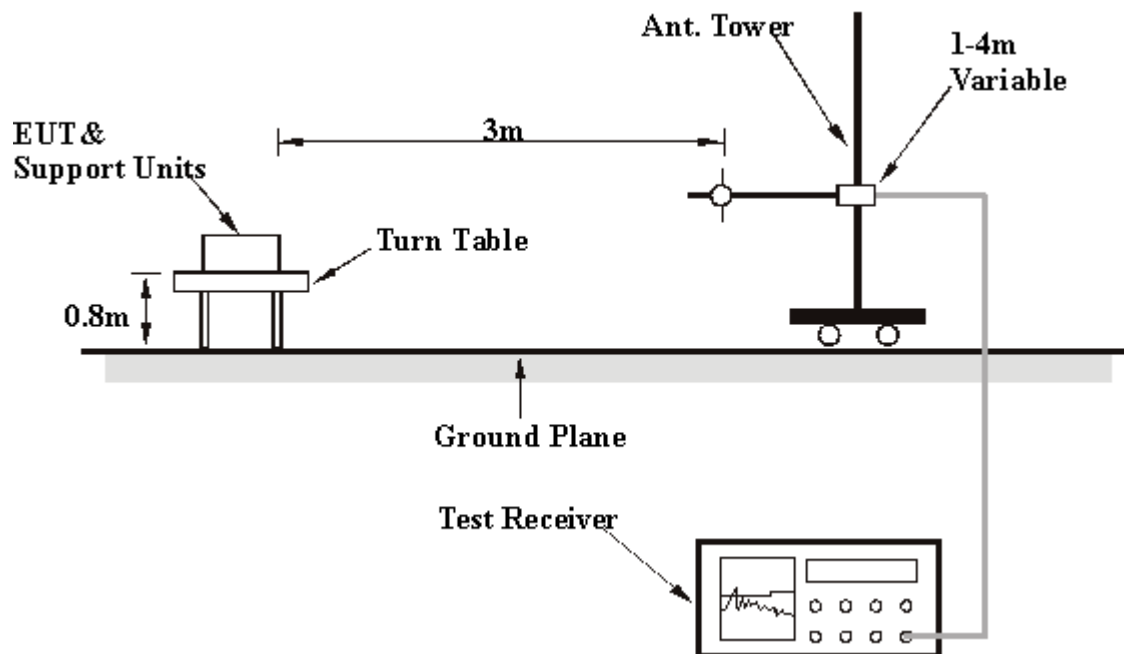

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 76 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	168.02	33.00	43.50	-10.50	1.50	229	19.44	13.57
2	236.05	41.47	46.00	-4.53	1.50	181	28.49	12.98
3	539.30	37.72	46.00	-8.28	2.00	232	16.84	20.88
4	574.29	35.08	46.00	-10.92	1.75	250	13.24	21.84
5	661.76	36.84	46.00	-9.16	1.00	85	13.42	23.42
6	720.08	38.92	46.00	-7.08	1.25	52	14.38	24.53
7	811.44	42.80	46.00	-3.20	1.00	121	17.07	25.74
8	856.15	34.65	46.00	-11.35	1.00	142	8.39	26.26
9	939.74	37.15	46.00	-8.85	1.75	121	9.56	27.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	34.88	40.00	-5.12	1.25	271	20.40	14.48
2	236.05	34.83	46.00	-11.17	2.00	337	21.85	12.98
3	537.35	36.89	46.00	-9.11	1.25	253	16.05	20.84
4	574.29	35.37	46.00	-10.63	1.00	229	13.53	21.84
5	657.88	37.68	46.00	-8.32	1.25	187	14.32	23.36
6	720.08	41.97	46.00	-4.03	1.00	166	17.44	24.53
7	776.45	35.41	46.00	-10.59	1.00	163	9.92	25.49
8	811.44	40.82	46.00	-5.18	1.00	178	15.08	25.74
9	898.92	35.48	46.00	-10.52	1.25	340	8.37	27.12
10	945.57	38.77	46.00	-7.23	1.25	163	11.11	27.66

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS (A)

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.27 PK	74.00	-19.73	1.02 H	25	23.52	30.75
1	2390.00	45.85 AV	54.00	-8.15	1.02 H	25	15.10	30.75
2	*2412.00	109.09 PK			1.02 H	25	78.25	30.84
2	*2412.00	100.67 AV			1.02 H	25	69.83	30.84
3	2688.00	40.09 PK	74.00	-33.91	1.02 H	25	8.49	31.60
4	4824.00	52.77 PK	74.00	-21.23	1.20 H	153	16.52	36.26
4	4824.00	38.29 AV	54.00	-15.71	1.20 H	153	2.04	36.26
5	7236.00	60.46 PK	89.09	-28.63	1.20 H	339	18.21	42.25
5	7236.00	49.19 AV	80.67	-31.48	1.20 H	339	6.94	42.25
6	9648.00	60.25 PK	89.09	-28.84	1.11 H	322	15.28	44.97
6	9648.00	51.47 AV	80.67	-29.20	1.11 H	322	6.50	44.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	60.42 PK	74.00	-13.58	1.13 V	221	29.69	30.73
1	<b>2387.00</b>	<b>52.09 AV</b>	<b>54.00</b>	<b>-1.91</b>	<b>1.13 V</b>	<b>221</b>	<b>21.36</b>	<b>30.73</b>
2	*2412.00	115.24 PK			1.15 V	121	84.40	30.84
2	*2412.00	106.91 AV			1.15 V	121	76.07	30.84
3	2688.00	46.24 PK	74.00	-27.76	1.13 V	221	14.64	31.60
4	4824.00	58.24 PK	74.00	-15.76	1.13 V	221	21.99	36.26
4	4824.00	44.02 AV	54.00	-9.98	1.13 V	221	7.77	36.26
5	7235.00	64.22 PK	95.24	-31.02	1.00 V	211	21.97	42.25
5	7235.00	54.08 AV	86.91	-32.83	1.00 V	211	11.83	42.25
6	9648.00	62.06 PK	95.24	-33.18	1.18 V	50	17.09	44.97
6	9648.00	56.41 AV	86.91	-30.50	1.18 V	50	11.44	44.97

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency





<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.50 PK			1.14 H	310	75.55	30.95
1	*2437.00	97.70 AV			1.14 H	310	66.75	30.95
2	2437.00	47.80 PK	74.00	-26.20	1.27 H	216	16.85	30.95
3	7308.00	61.12 PK	74.00	-12.88	1.19 H	342	18.74	42.38
3	7308.00	49.29 AV	54.00	-4.71	1.19 H	342	6.91	42.38
4	9748.00	58.07 PK	86.50	-28.43	1.13 H	333	12.75	45.32
4	9748.00	48.11 AV	77.70	-29.59	1.13 H	333	2.79	45.32

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.62 PK			1.44 V	263	84.67	30.95
1	*2437.00	107.23 AV			1.44 V	263	76.28	30.95
2	4874.00	57.15 PK	74.00	-16.85	1.03 V	360	20.81	36.34
2	4874.00	43.70 AV	54.00	-10.30	1.03 V	360	7.36	36.34
3	7311.00	61.79 PK	74.00	-12.21	1.28 V	211	19.41	42.38
3	7311.00	50.94 AV	54.00	-3.06	1.28 V	211	8.56	42.38
4	9748.00	59.57 PK	95.62	-36.05	1.22 V	355	14.25	45.32
4	9748.00	50.83 AV	87.23	-36.40	1.22 V	355	5.51	45.32

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.91 PK			1.48 H	309	76.85	31.06
1	*2462.00	99.64 AV			1.48 H	309	68.58	31.06
2	2483.50	51.91 PK	74.00	-22.09	1.48 H	309	20.76	31.15
2	2483.50	43.64 AV	54.00	-10.36	1.48 H	309	12.49	31.15
3	2688.00	38.91 PK	74.00	-35.09	1.48 H	309	7.31	31.60
4	4924.00	50.52 PK	74.00	-23.48	1.60 H	155	14.10	36.42
5	7378.00	55.58 PK	74.00	-18.42	1.35 H	231	13.08	42.50
5	7378.00	44.48 AV	54.00	-9.52	1.35 H	231	1.98	42.50

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.07 PK			1.37 V	267	85.01	31.06
1	*2462.00	107.46 AV			1.37 V	267	76.40	31.06
2	2483.50	60.07 PK	74.00	-13.93	1.37 V	267	28.92	31.15
2	2483.50	51.46 AV	54.00	-2.54	1.37 V	267	20.31	31.15
3	2688.00	47.07 PK	74.00	-26.93	1.37 V	267	15.47	31.60
4	2908.00	52.74 PK	74.00	-21.26	1.21 V	277	20.49	32.25
4	2908.00	44.91 AV	54.00	-9.09	1.21 V	277	12.66	32.25
5	4924.00	56.51 PK	74.00	-17.49	1.27 V	37	20.09	36.42
5	4924.00	42.48 AV	54.00	-11.52	1.27 V	37	6.06	36.42
6	7384.00	60.05 PK	74.00	-13.95	1.12 V	342	17.53	42.51
6	7384.00	48.20 AV	54.00	-5.80	1.12 V	342	5.68	42.51
7	9848.00	58.87 PK	96.07	-37.20	1.19 V	351	13.34	45.53
7	9848.00	49.36 AV	87.46	-38.10	1.19 V	351	3.83	45.53

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



4.2.9 TEST RESULTS (B)

Normal mode:

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	22 deg. C, 76 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.53 PK	74.00	-18.47	1.11 H	218	24.78	30.75
1	2390.00	44.62 AV	54.00	-9.38	1.11 H	218	13.87	30.75
2	*2412.00	104.09 PK			1.11 H	218	73.25	30.84
2	*2412.00	93.18 AV			1.11 H	218	62.34	30.84
3	2688.00	40.69 PK	74.00	-33.31	1.11 H	218	9.09	31.60
4	4824.00	49.44 PK	74.00	-24.56	1.48 H	230	13.19	36.26
5	7237.00	55.44 PK	74.00	-18.56	1.20 H	360	13.19	42.25
5	7237.00	42.04 AV	54.00	-11.96	1.20 H	360	-0.21	42.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.90 PK	74.00	-13.10	1.00 V	148	30.15	30.75
1	2390.00	49.85 AV	54.00	-4.15	1.00 V	148	19.10	30.75
2	*2412.00	109.46 PK			1.00 V	148	78.61	30.84
2	*2412.00	98.41 AV			1.00 V	148	67.56	30.84
3	2688.00	46.06 PK	74.00	-27.94	1.11 V	218	14.46	31.60
4	4824.00	52.96 PK	74.00	-21.04	1.00 V	208	16.71	36.26
4	4824.00	37.56 AV	54.00	-16.44	1.00 V	208	1.31	36.26
5	7234.00	61.19 PK	74.00	-12.81	1.11 V	218	18.94	42.25
5	7234.00	44.15 AV	54.00	-9.85	1.11 V	218	1.90	42.25

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



**Normal mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.77 PK			1.46 H	309	70.82	30.95
1	*2437.00	91.73 AV			1.46 H	309	60.78	30.95
2	4874.00	52.26 PK	74.00	-21.74	1.06 H	85	15.92	36.34
2	4874.00	37.80 AV	54.00	-16.20	1.06 H	85	1.46	36.34
3	7311.00	55.62 PK	74.00	-18.38	1.56 H	74	13.24	42.38
3	7311.00	41.82 AV	54.00	-12.18	1.56 H	74	-0.56	42.38

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.72 PK			1.16 V	120	78.77	30.95
1	*2437.00	99.30 AV			1.16 V	120	68.35	30.95
2	4874.00	54.14 PK	74.00	-19.86	1.00 V	25	17.80	36.34
2	4874.00	36.74 AV	54.00	-17.26	1.00 V	25	0.40	36.34
3	7311.00	55.56 PK	74.00	-18.44	1.16 V	139	13.18	42.38
3	7311.00	42.53 AV	54.00	-11.47	1.16 V	139	0.15	42.38

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency



**Normal mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.73 PK			1.27 H	151	70.67	31.06
1	*2462.00	91.56 AV			1.27 H	151	60.50	31.06
2	2483.50	50.73 PK	74.00	-23.27	1.27 H	151	19.58	31.15
3	2688.00	41.73 PK	74.00	-32.27	1.27 H	151	10.13	31.60
4	4924.00	53.58 PK	74.00	-20.42	1.20 H	66	17.16	36.42
4	4924.00	36.18 AV	54.00	-17.82	1.20 H	66	-0.24	36.42
5	7386.00	49.27 PK	74.00	-24.73	1.00 H	201	6.75	42.52

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.11 PK			1.25 V	296	81.05	31.06
1	*2462.00	101.67 AV			1.25 V	296	70.61	31.06
2	2483.50	61.11 PK	74.00	-12.89	1.25 V	296	29.96	31.15
2	2483.50	50.67 AV	54.00	-3.33	1.25 V	296	19.52	31.15
3	2688.00	52.11 PK	74.00	-21.89	1.25 V	296	20.51	31.60
3	2688.00	41.67 AV	54.00	-12.33	1.25 V	296	10.07	31.60
4	4924.00	52.92 PK	74.00	-21.08	1.16 V	139	16.50	36.42
4	4924.00	36.22 AV	54.00	-17.78	1.16 V	139	-0.20	36.42
5	7386.00	56.06 PK	74.00	-17.94	1.06 V	35	13.55	42.52
5	7386.00	41.16 AV	54.00	-12.84	1.06 V	35	-1.35	42.52

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



**Turbo mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.40 PK	74.00	-23.60	1.22 H	151	17.73	32.67
1	2390.00	39.23 AV	54.00	-14.77	1.22 H	151	6.56	32.67
2	*2437.00	100.57 PK			1.22 H	151	67.67	32.90
2	*2437.00	89.40 AV			1.22 H	151	56.50	32.90
3	2483.50	50.73 PK	74.00	-23.27	1.22 H	151	17.59	33.14
3	2483.50	39.56 AV	54.00	-14.44	1.22 H	151	6.42	33.14
4	4874.00	46.95 PK	74.00	-27.05	1.00 H	321	7.89	39.05
4	4874.00	36.02 AV	54.00	-17.98	1.00 H	321	-3.04	39.05
5	7313.00	57.03 PK	74.00	-16.97	1.27 H	357	11.34	45.69
5	7313.00	43.83 AV	54.00	-10.17	1.27 H	357	-1.86	45.69

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.40 PK	74.00	-13.60	1.30 V	94	27.73	32.67
1	2390.00	49.40 AV	54.00	-4.60	1.30 V	94	16.73	32.67
2	*2437.00	110.57 PK			1.30 V	94	77.67	32.90
2	*2437.00	99.57 AV			1.30 V	94	66.67	32.90
3	2483.50	60.73 PK	74.00	-13.27	1.30 V	94	27.59	33.14
3	2483.50	49.73 AV	54.00	-4.27	1.30 V	94	16.59	33.14
4	4874.00	48.30 PK	74.00	-25.70	1.00 V	36	9.24	39.05
4	4874.00	37.42 AV	54.00	-16.58	1.00 V	36	-1.64	39.05
5	7311.00	57.16 PK	74.00	-16.84	1.19 V	36	11.47	45.69
5	7311.00	44.16 AV	54.00	-9.84	1.19 V	36	-1.53	45.69

\*(This test data is in accordance with ADT report no. RF921204R02.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.





## 4.3.7 TEST RESULTS (A)


<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	12.36	0.5	PASS
6	2437	11.65	0.5	PASS
11	2462	12.16	0.5	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)




CH1

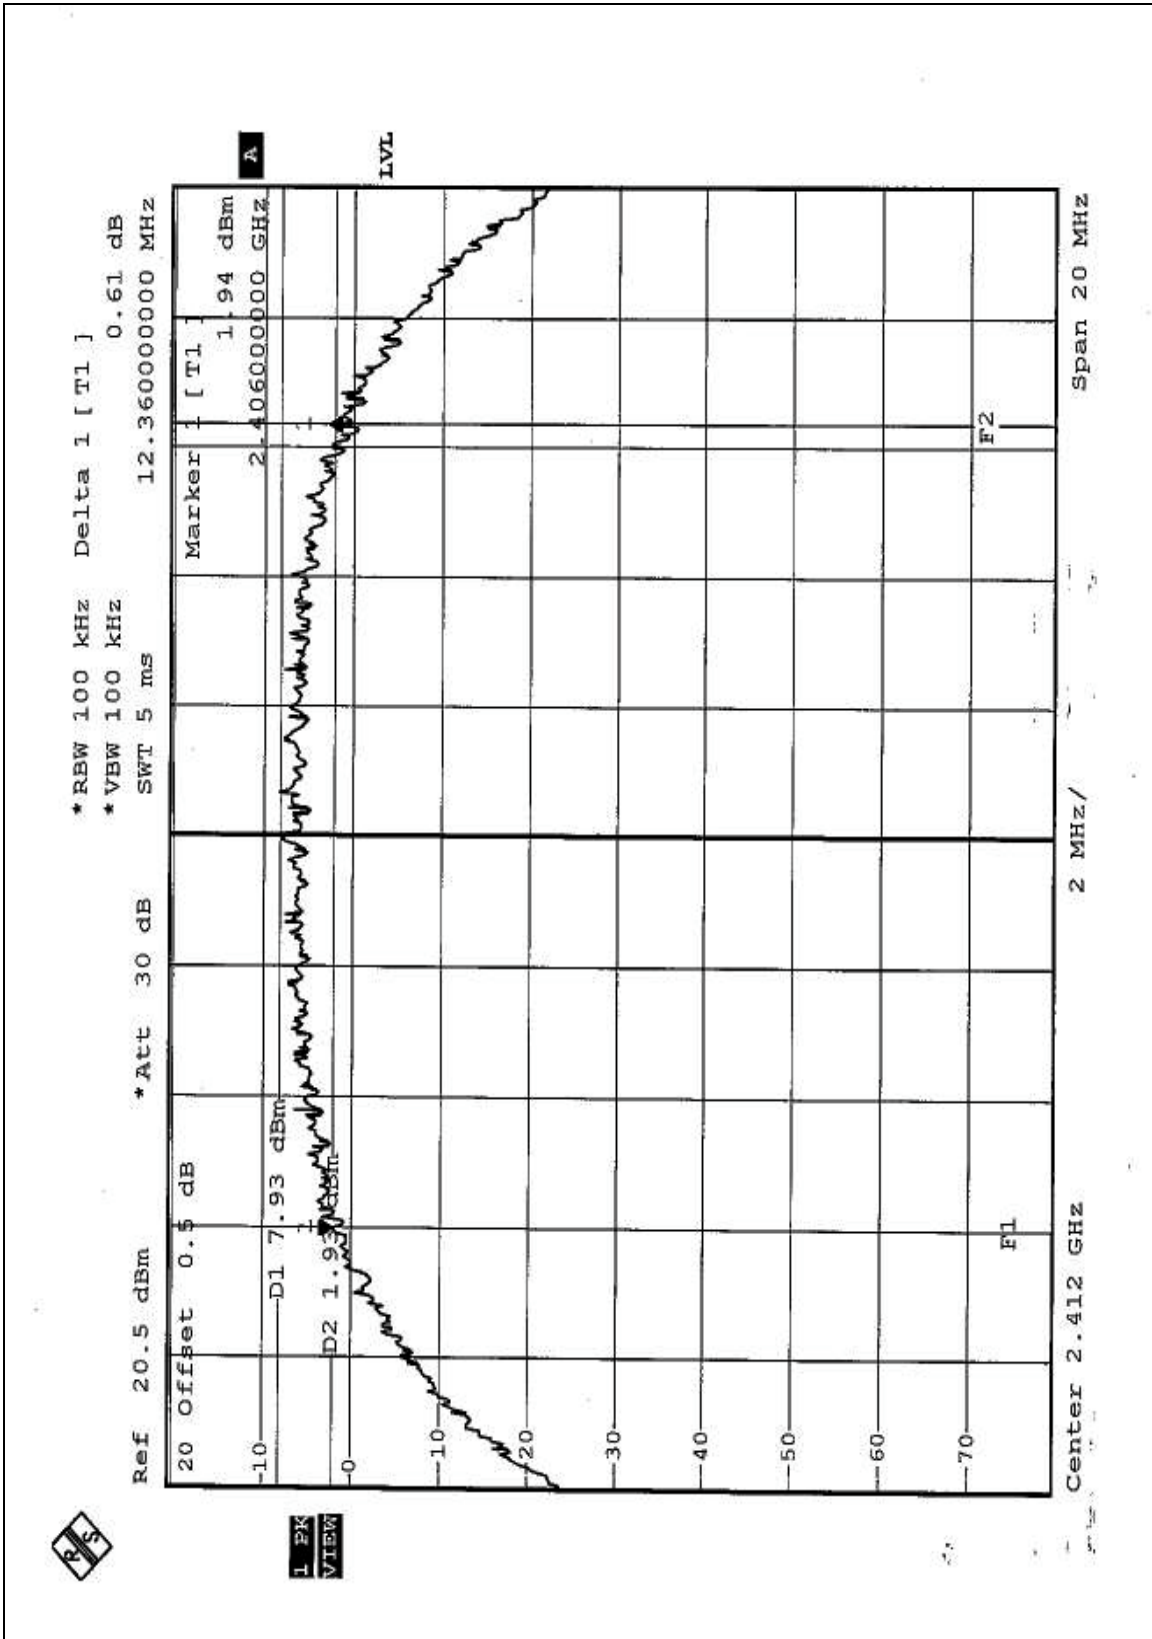




CH6

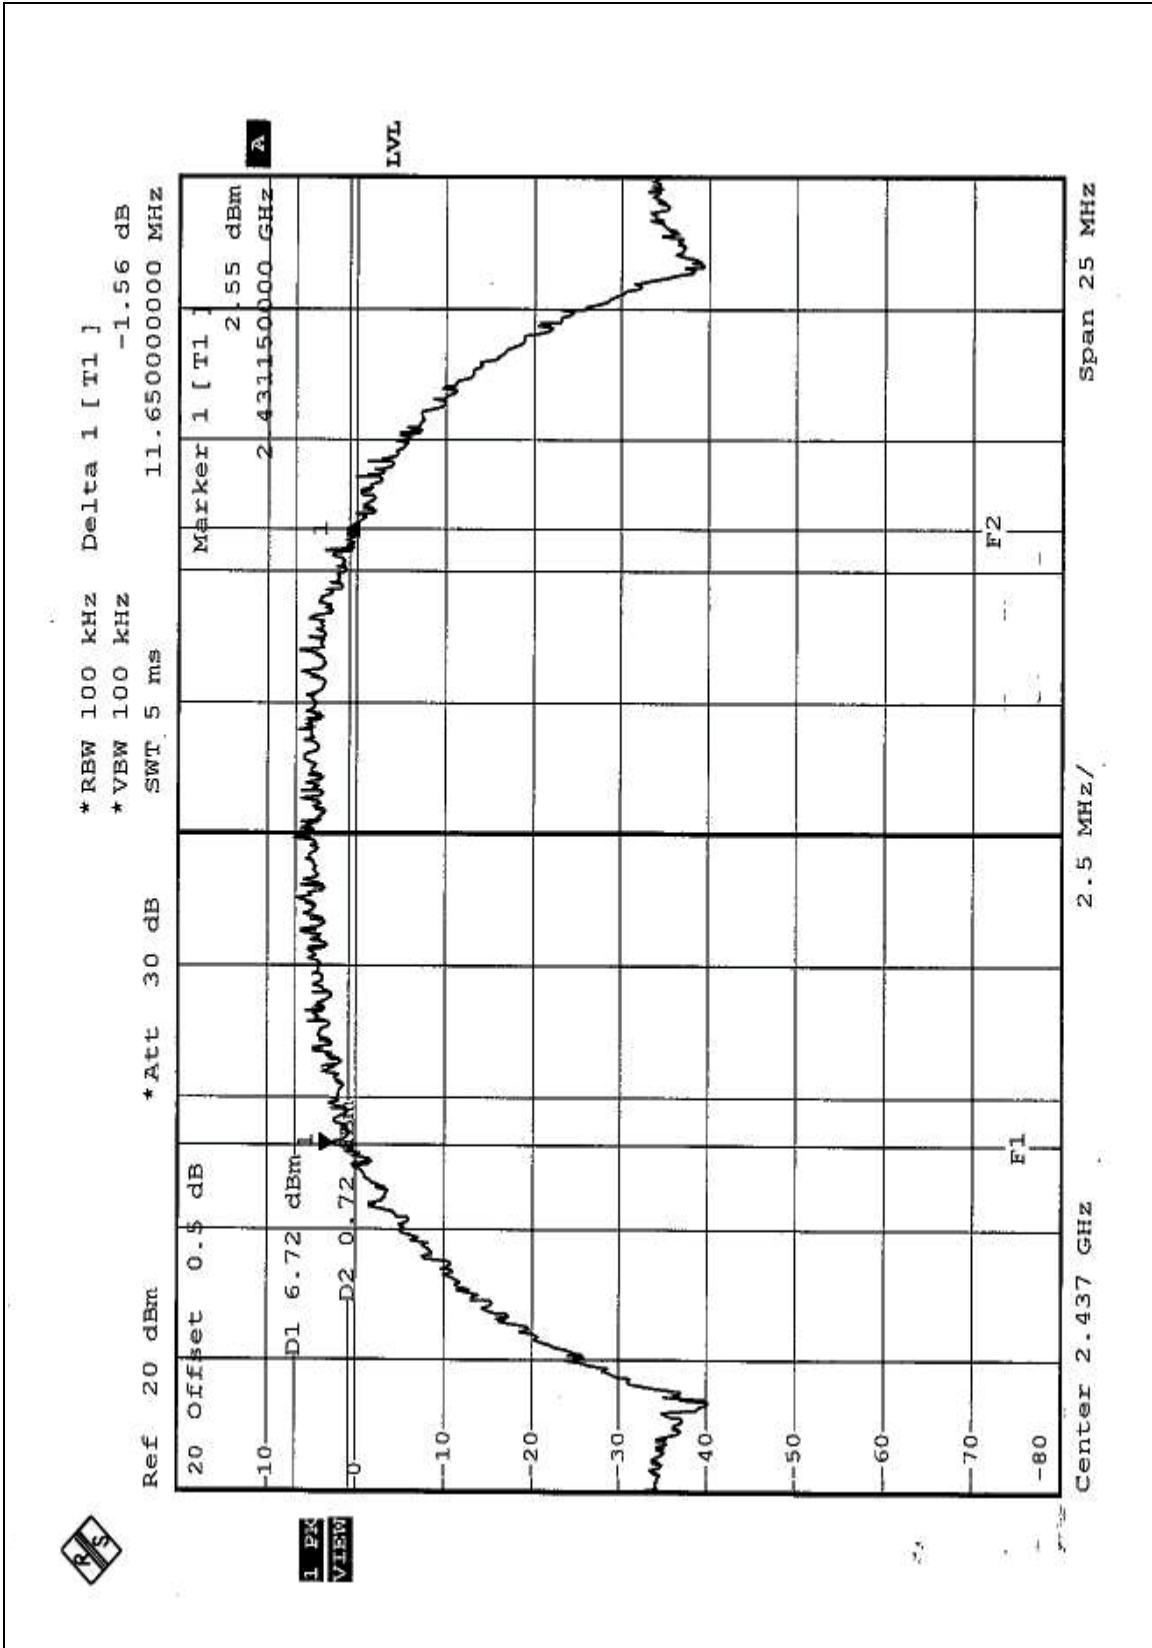



CH11

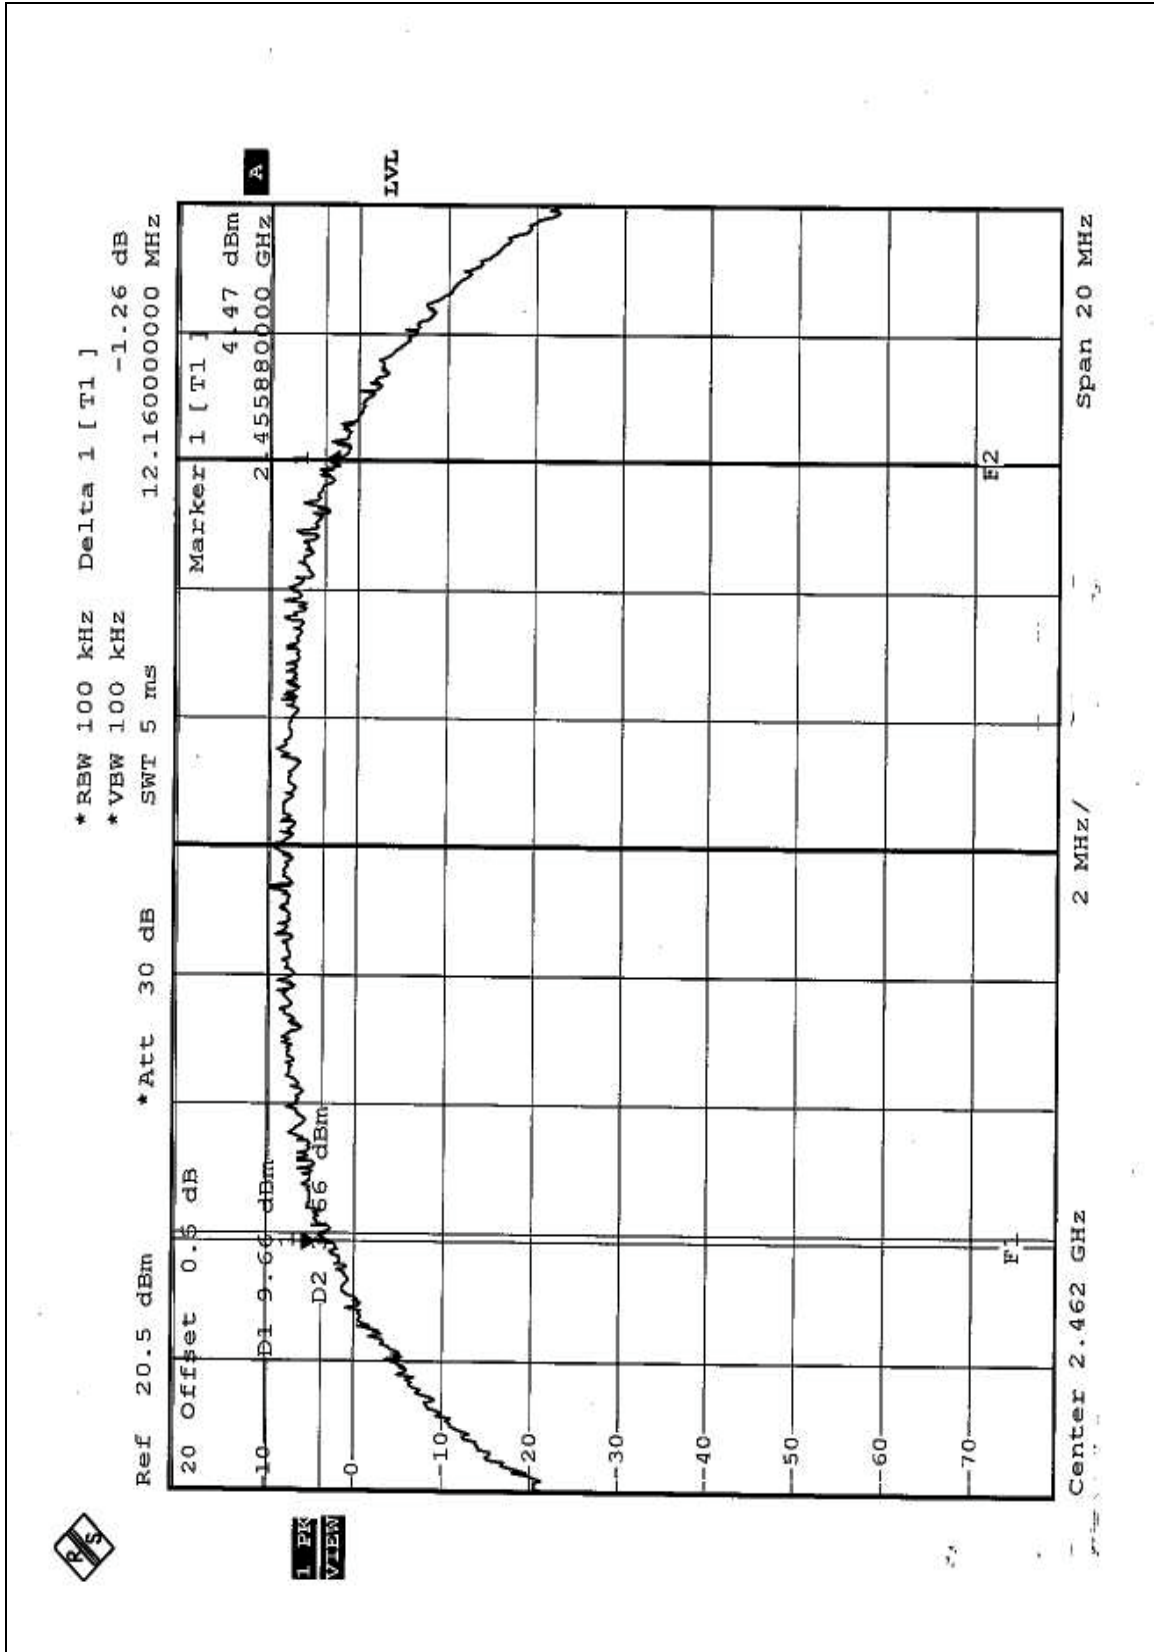



## 4.3.8 TEST RESULTS (B)

**Normal mode:**


<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.36	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.44	0.5	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)




CH1

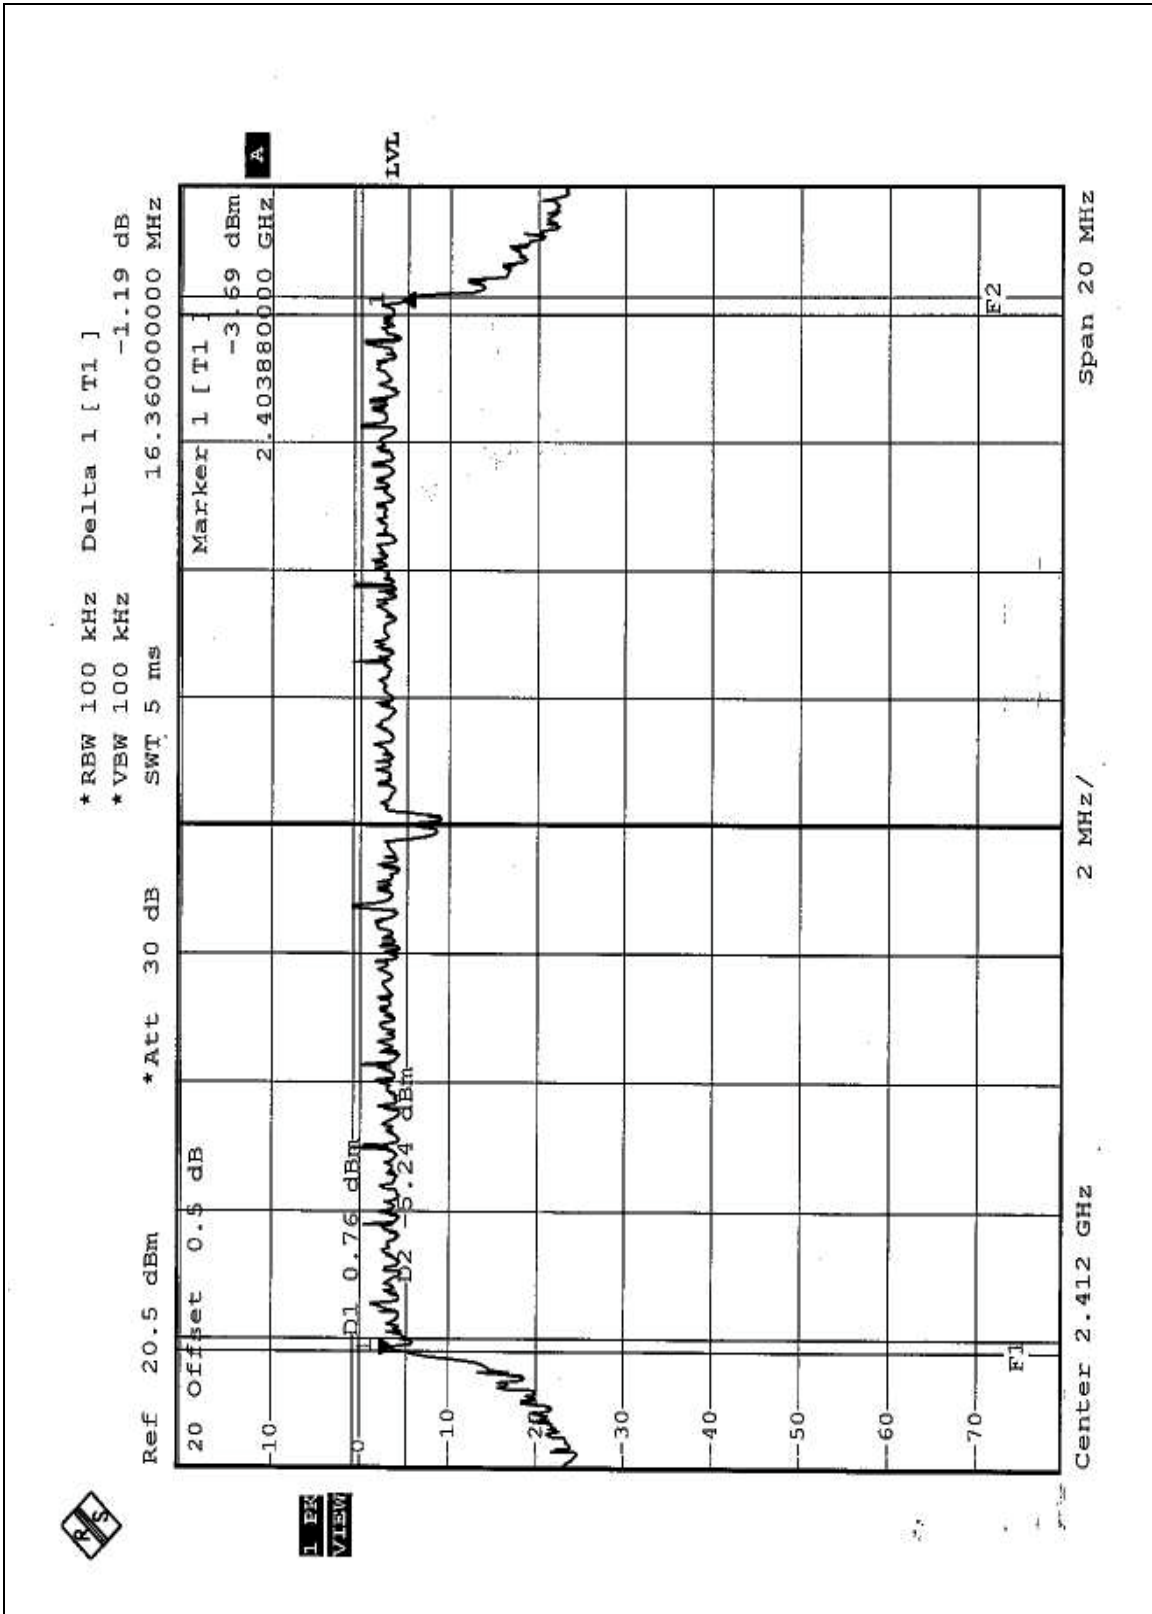




CH6

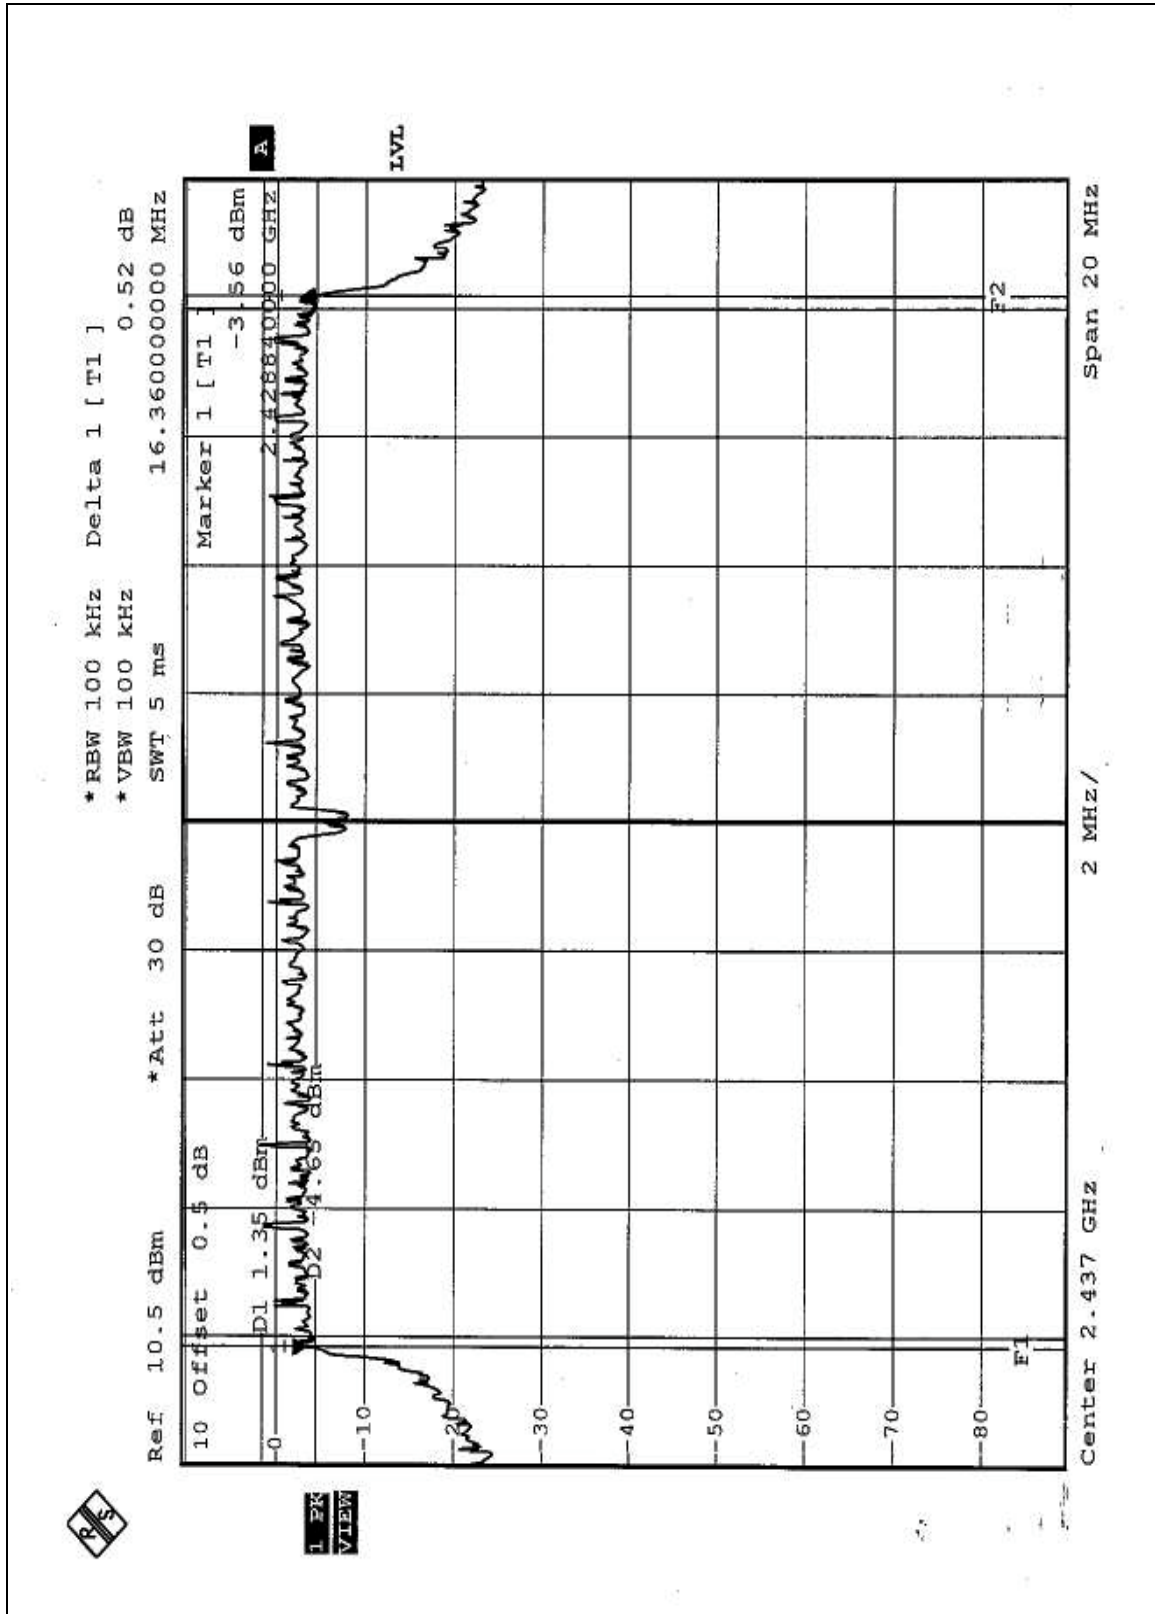



CH11

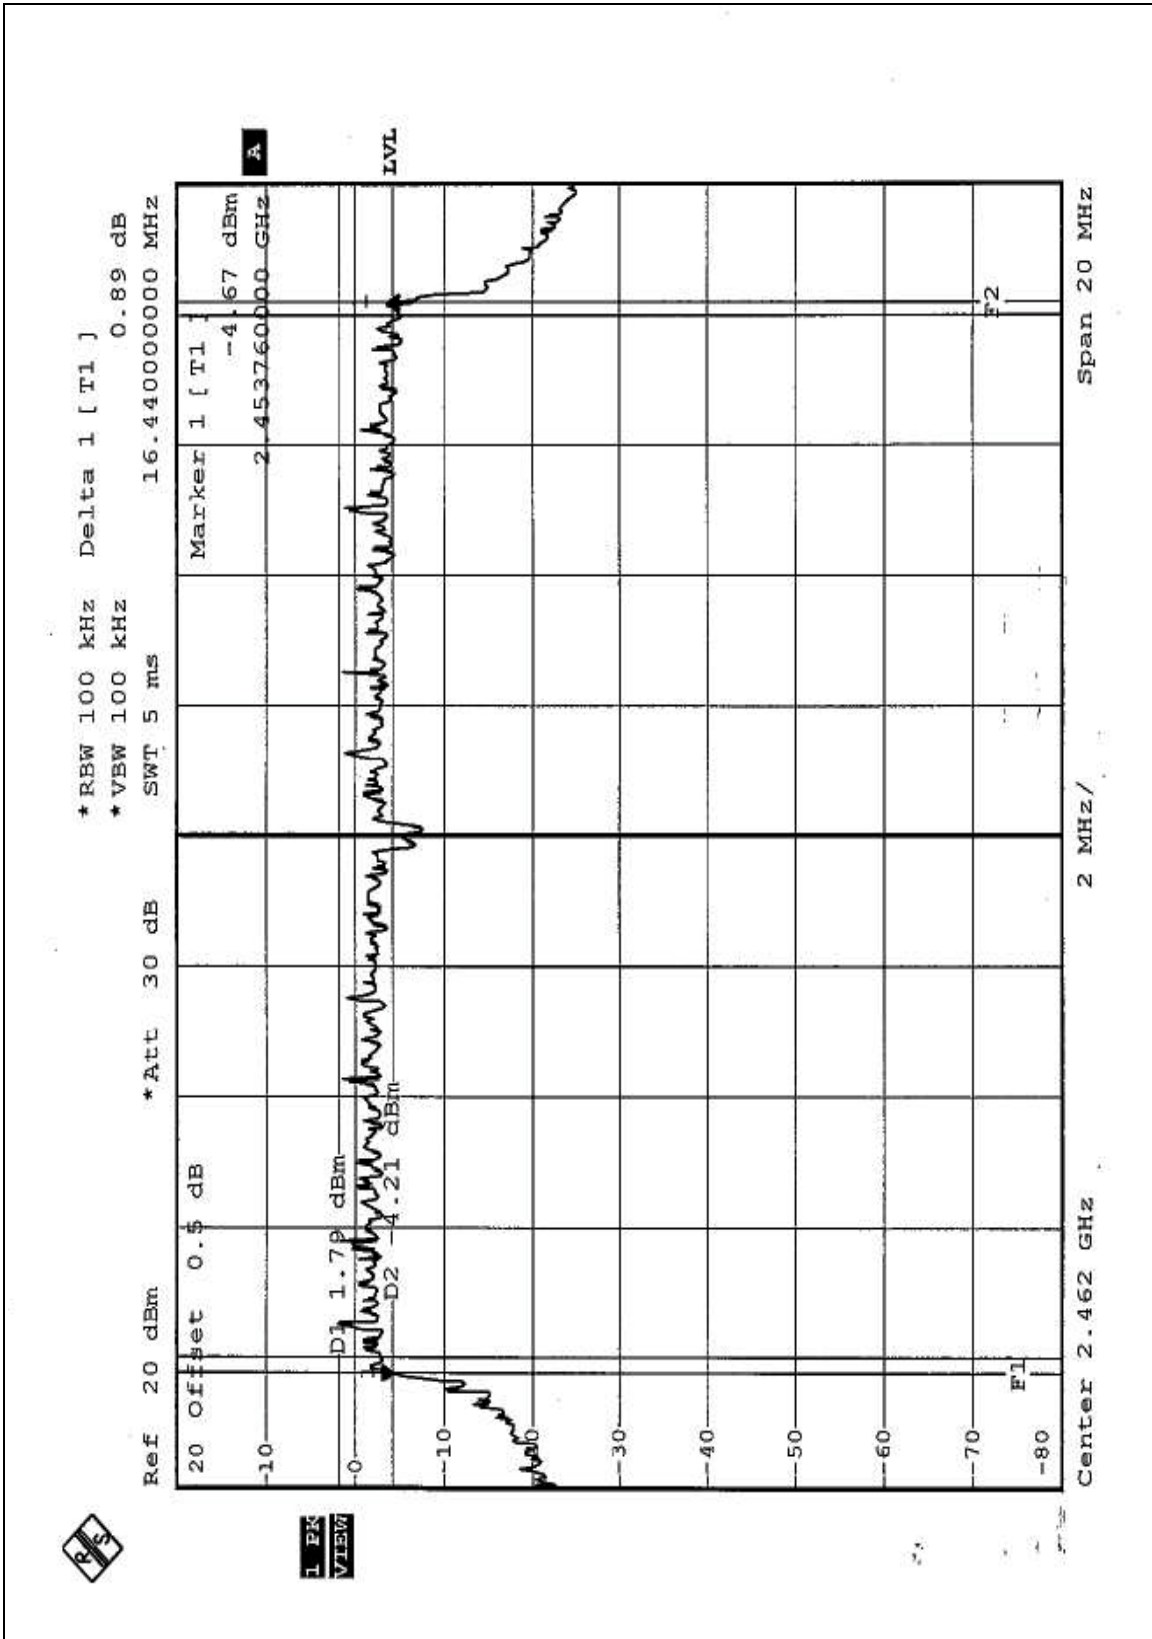



**Turbo mode:**


<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
6	2437	32.48	0.5	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)



CH6

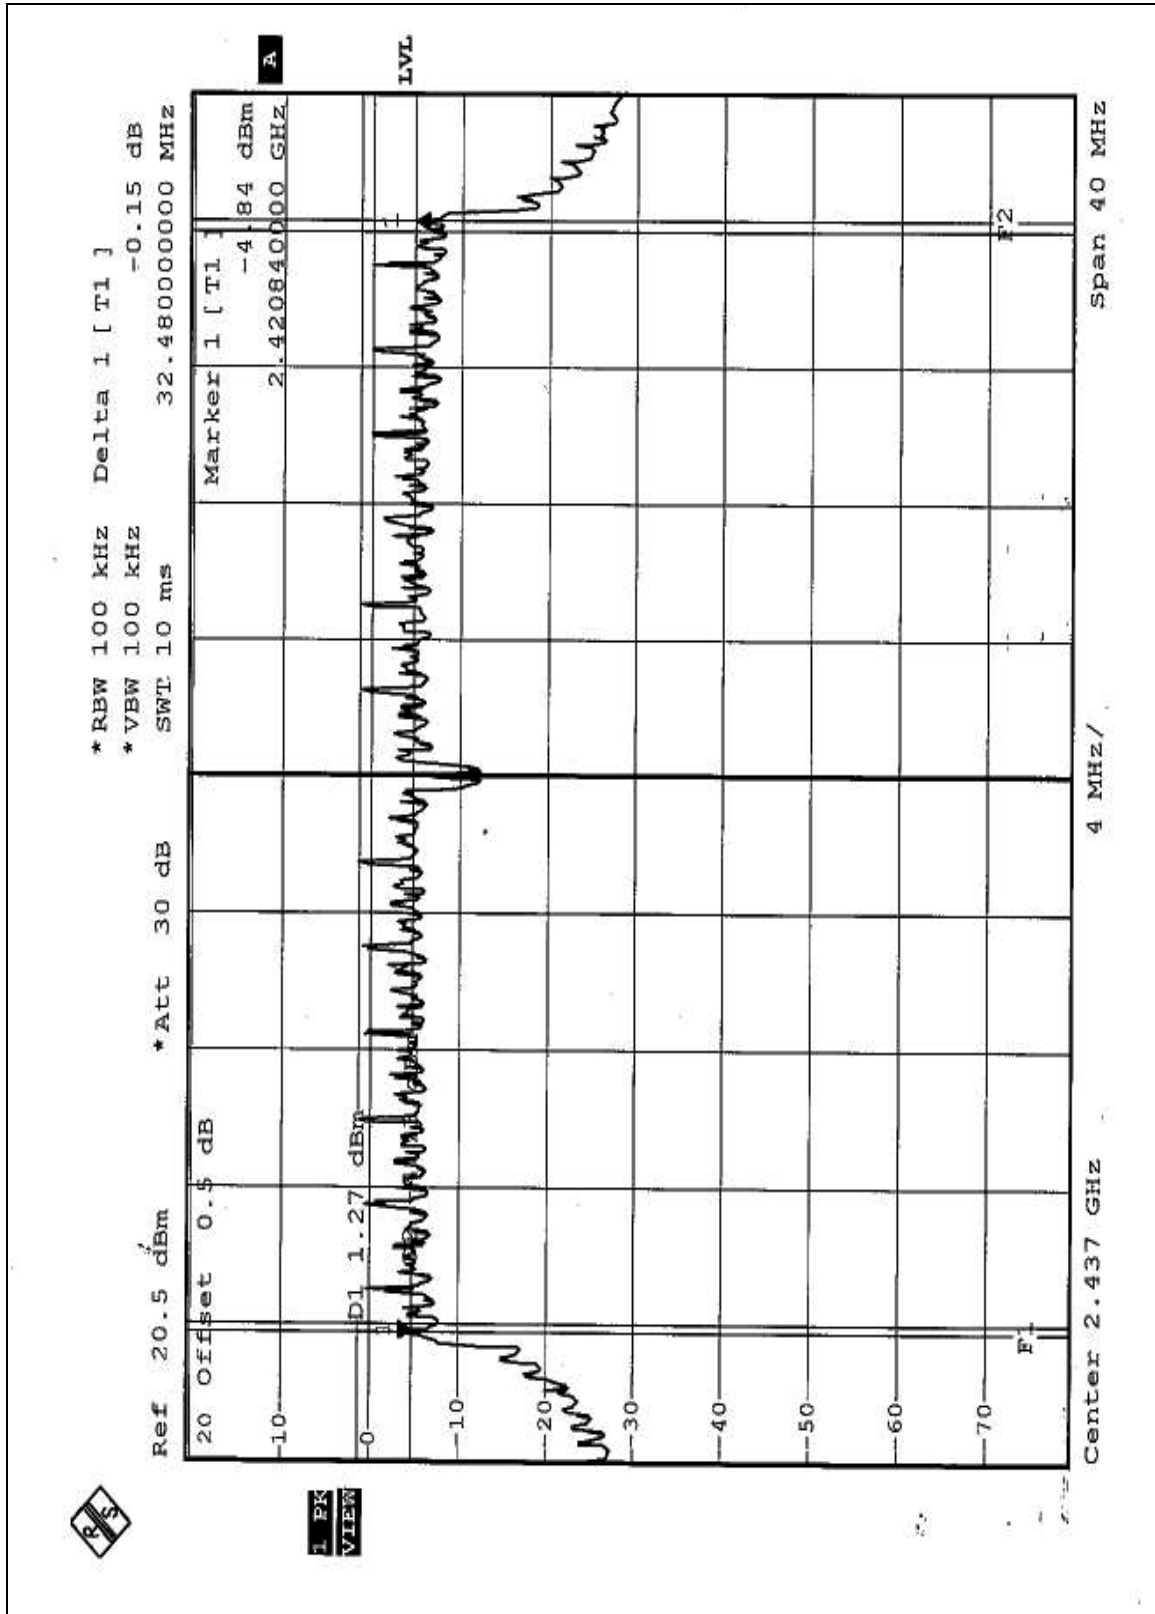



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..



#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



## 4.4.7 TEST RESULTS (A)

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	19.02	30	PASS
6	2437	18.92	30	PASS
11	2462	18.90	30	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)



4.4.8 TEST RESULTS (B)

**Normal Mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.04	30	PASS
6	2437	18.10	30	PASS
11	2462	18.10	30	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)

**Turbo Mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	GL2454VP-2A
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	18.34	30	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.



#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6





## 4.5.7 TEST RESULTS (A)


<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	0.49	8	PASS
6	2437	-1.35	8	PASS
11	2462	-1.29	8	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)




CH1

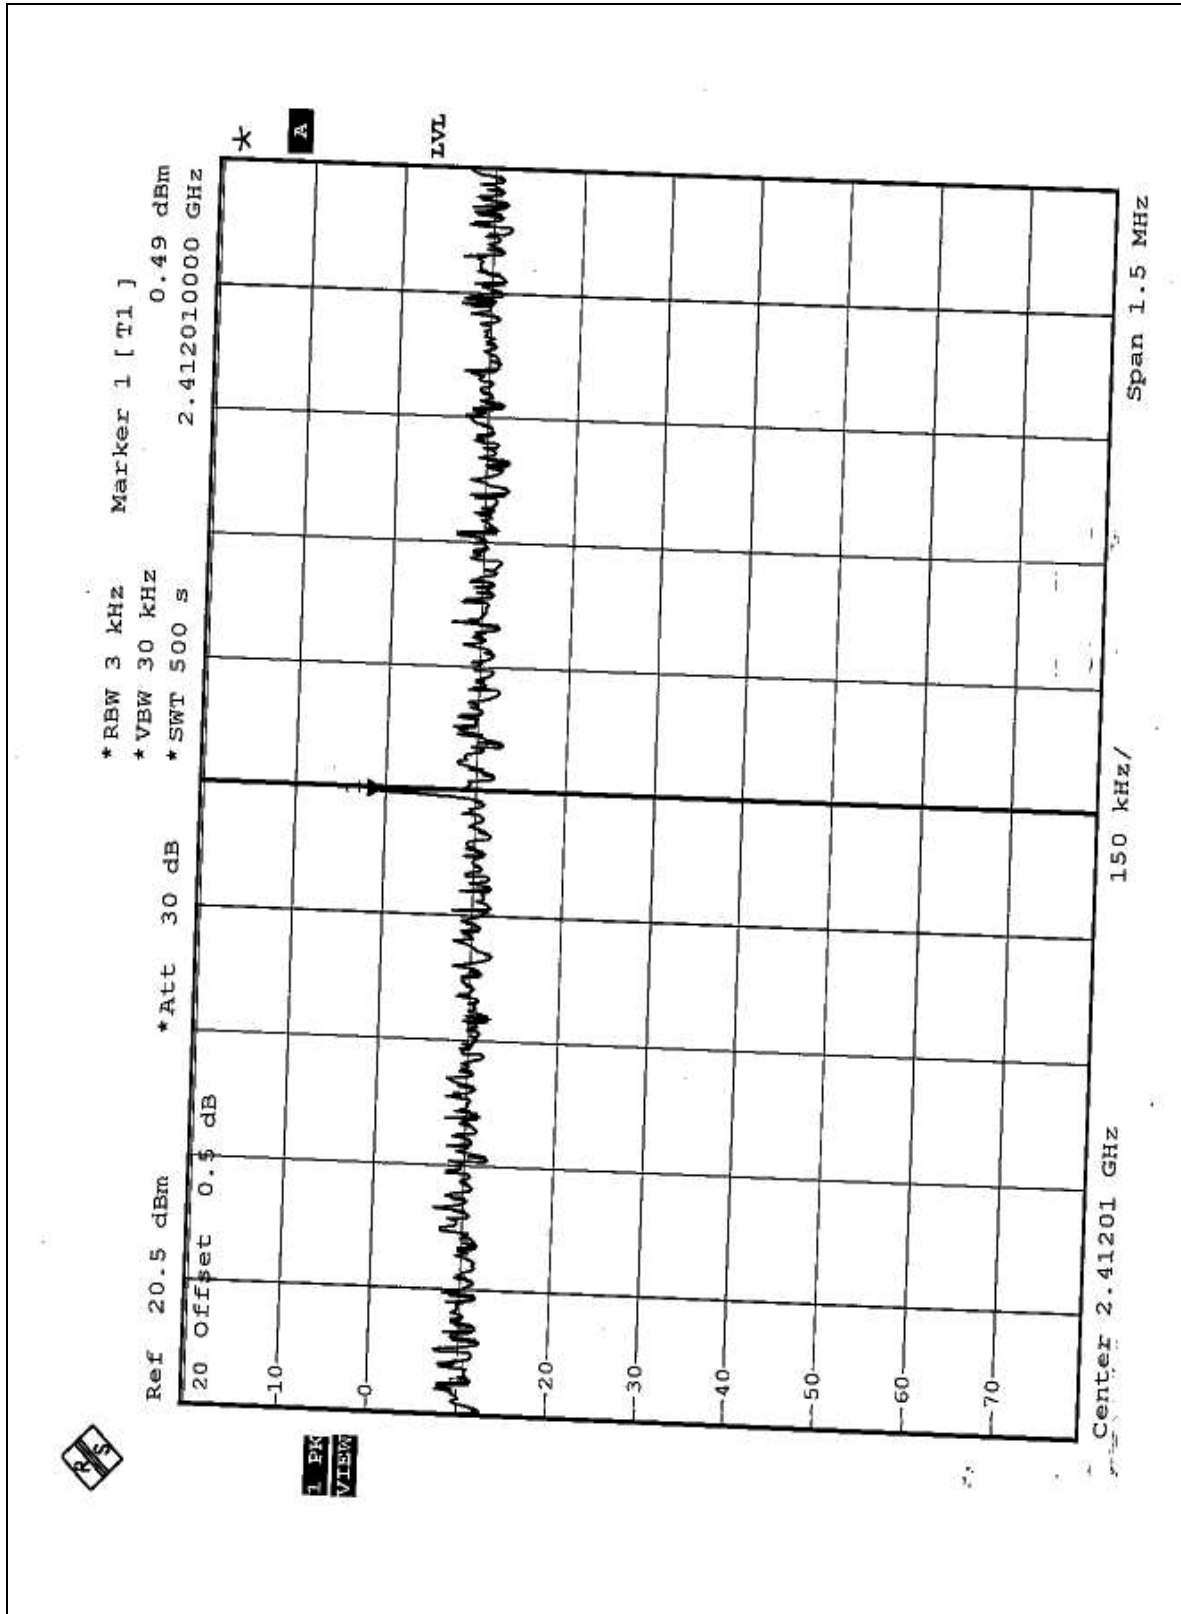




CH6

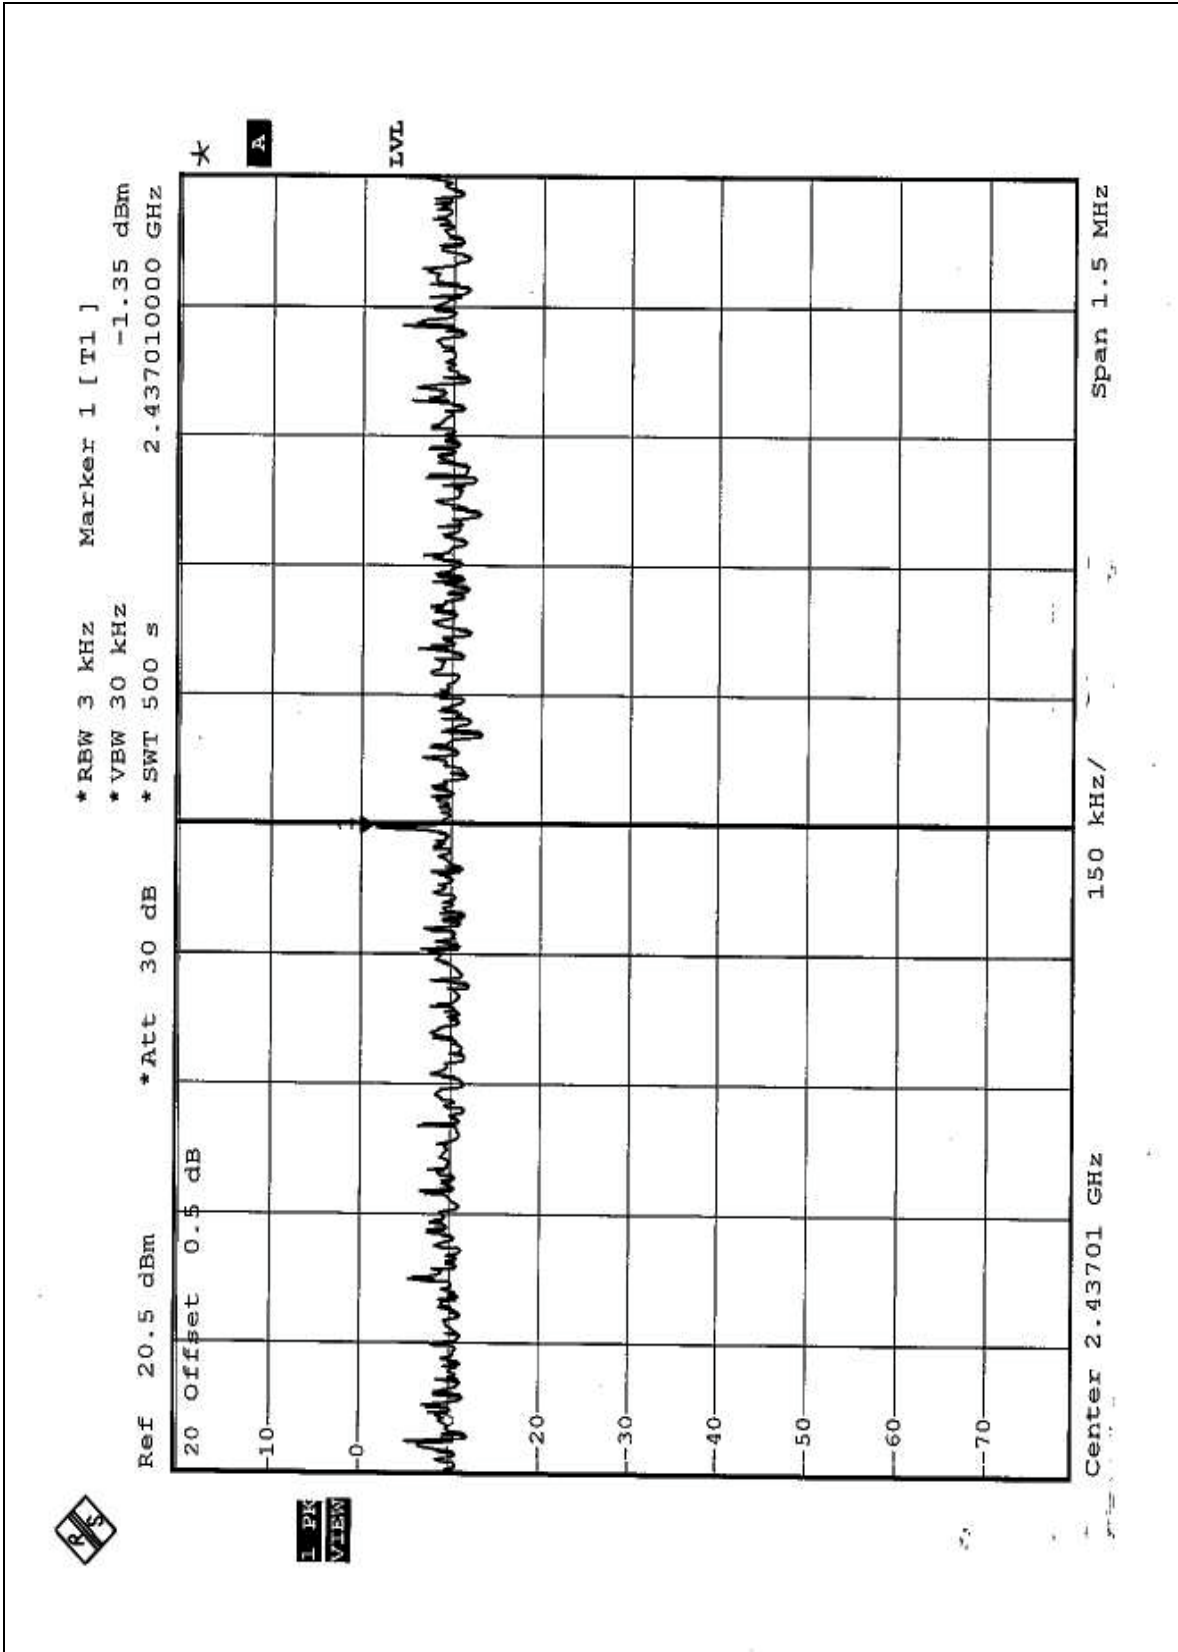



CH11

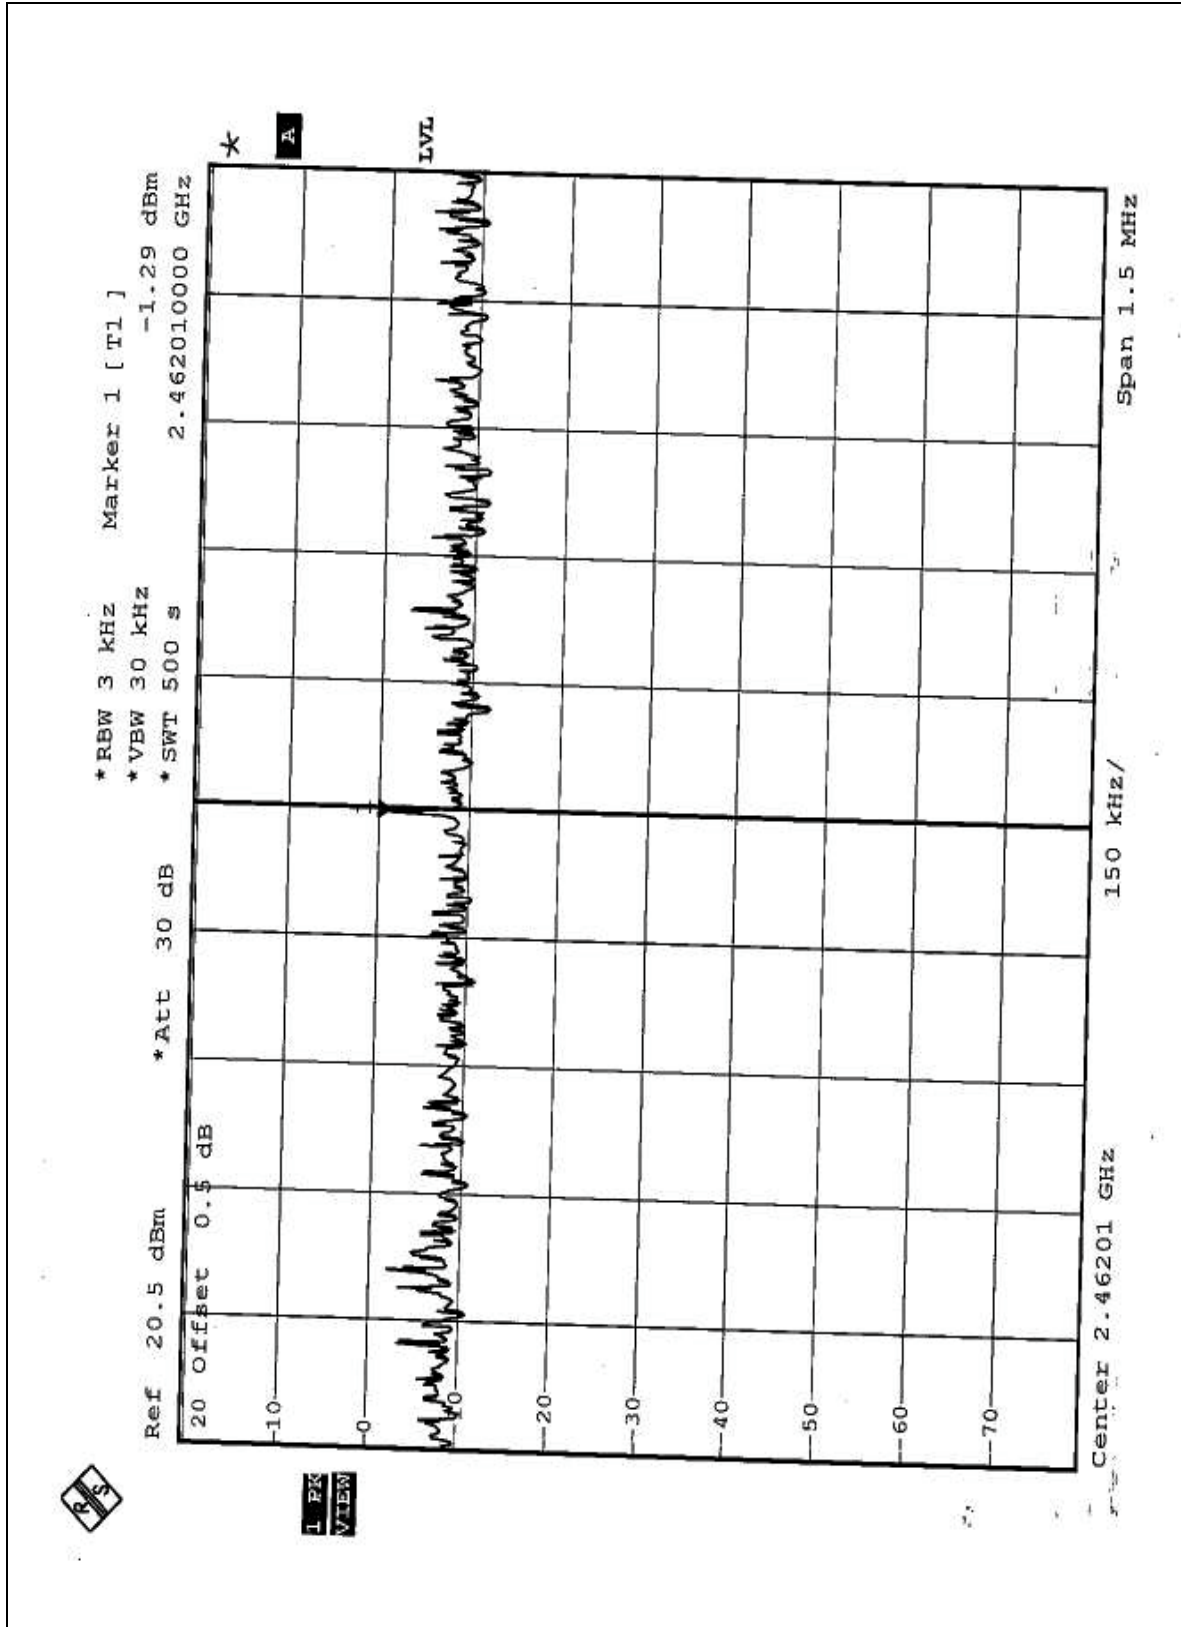



## 4.5.8 TEST RESULTS (B)

**Normal mode:**


<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	0.32	8	PASS
6	2437	-0.04	8	PASS
11	2462	-3.04	8	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)




CH1

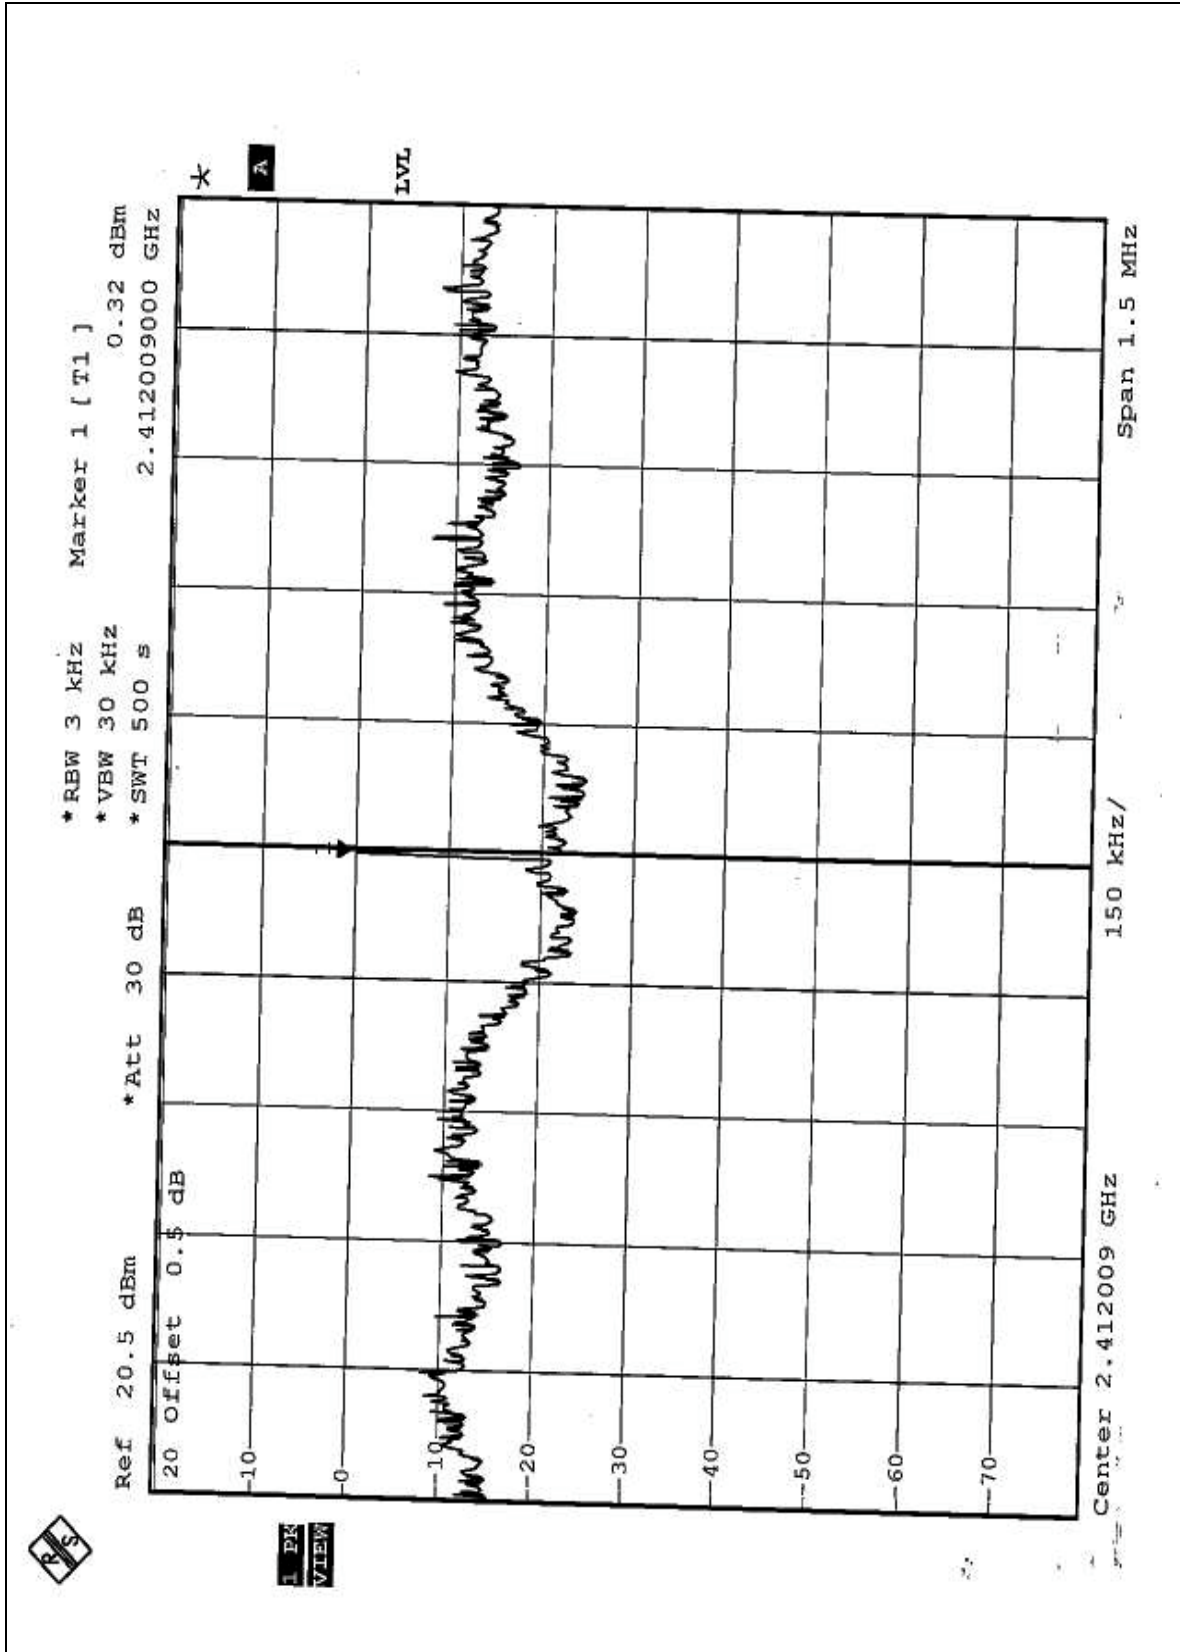



CH6

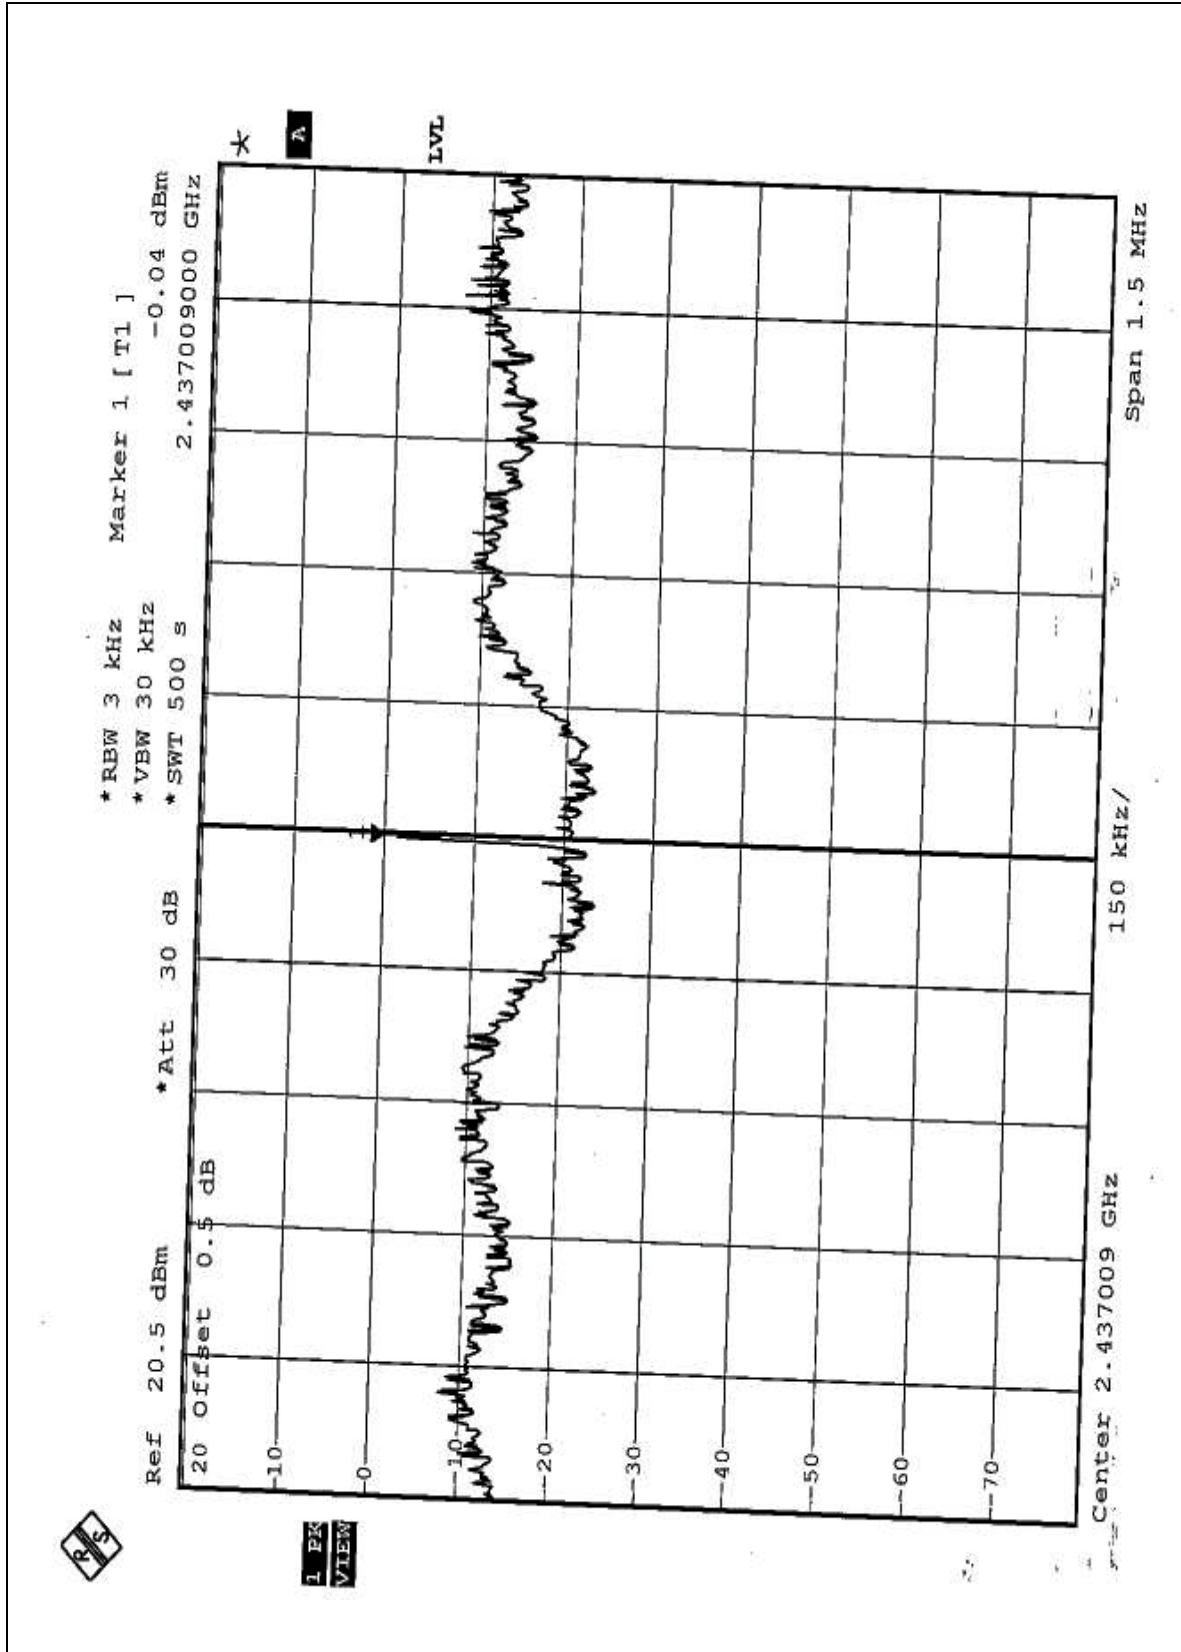





**Turbo mode:**

<b>EUT</b>	X-Micro WLAN 11g PCI Card	<b>MODEL</b>	XWL-11GCAG
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 60%RH, 991 hPa
<b>TESTED BY:</b> Martin Lee			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
6	2437	-11.77	8	PASS

\*(This test data is in accordance with ADT report no. RF921204R02.)





## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1 MHz and 10 Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS (A)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


#### **NOTE:**

The band edge emission plot on the following first page shows 53.95dB delta between carrier maximum power and local maximum emission in restrict band (2.3868GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 106.91dBuV/m, so the maximum field strength in restrict band is  $106.91-53.95=52.96$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following second page shows 56.67dB delta between carrier maximum power and local maximum emission in restrict band (2.4869GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 107.46dBuV/m, so the maximum field strength in restrict band is  $107.46-56.67=50.79$ dBuV/m which is under 54 dBuV/m limit.

\*(This test data is in accordance with ADT report no. RF921204R02.)



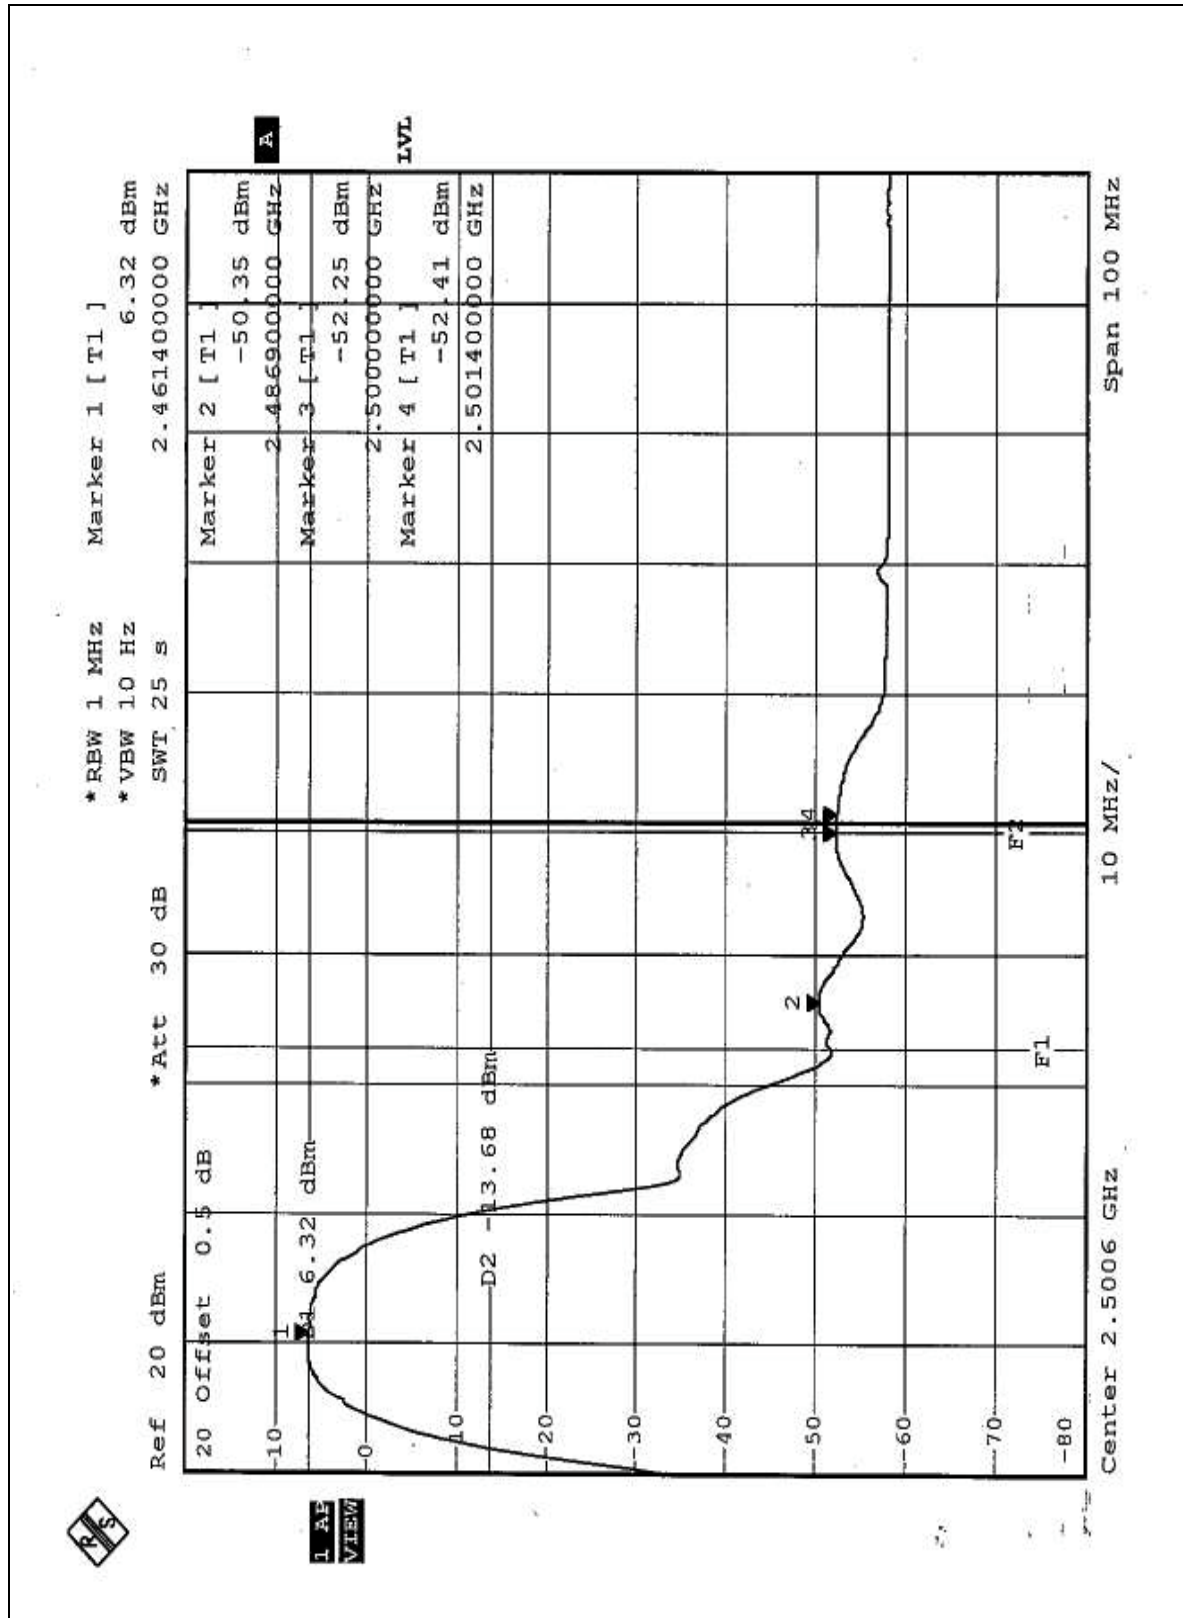



#### 4.6.7 TEST RESULTS (B)

The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

#### **NOTE:**

##### **Normal mode:**

The band edge emission plot on the following first page shows 47.86dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 98.41dBuV/m, so the maximum field strength in restrict band is  $98.41 - 47.86 = 50.55$  dBuV/m which is under 54 dBuV/m limit.


The band edge emission plot on the following second page shows 50.83dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 101.67dBuV/m, so the maximum field strength in restrict band is  $101.67 - 50.83 = 50.84$  dBuV/m which is under 54 dBuV/m limit.

##### **Turbo mode:**


The band edge emission plot on the following third page shows 49.73dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 99.57dBuV/m, so the maximum field strength in restrict band is  $99.57 - 49.73 = 49.84$  dBuV/m which is under 54 dBuV/m limit.


The band edge emission plot on the following forth page shows 51.91dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 99.57dBuV/m, so the maximum field strength in restrict band is  $99.57 - 51.91 = 47.66$  dBuV/m which is under 54 dBuV/m limit.


\*(This test data is in accordance with ADT report no. RF921204R02.)

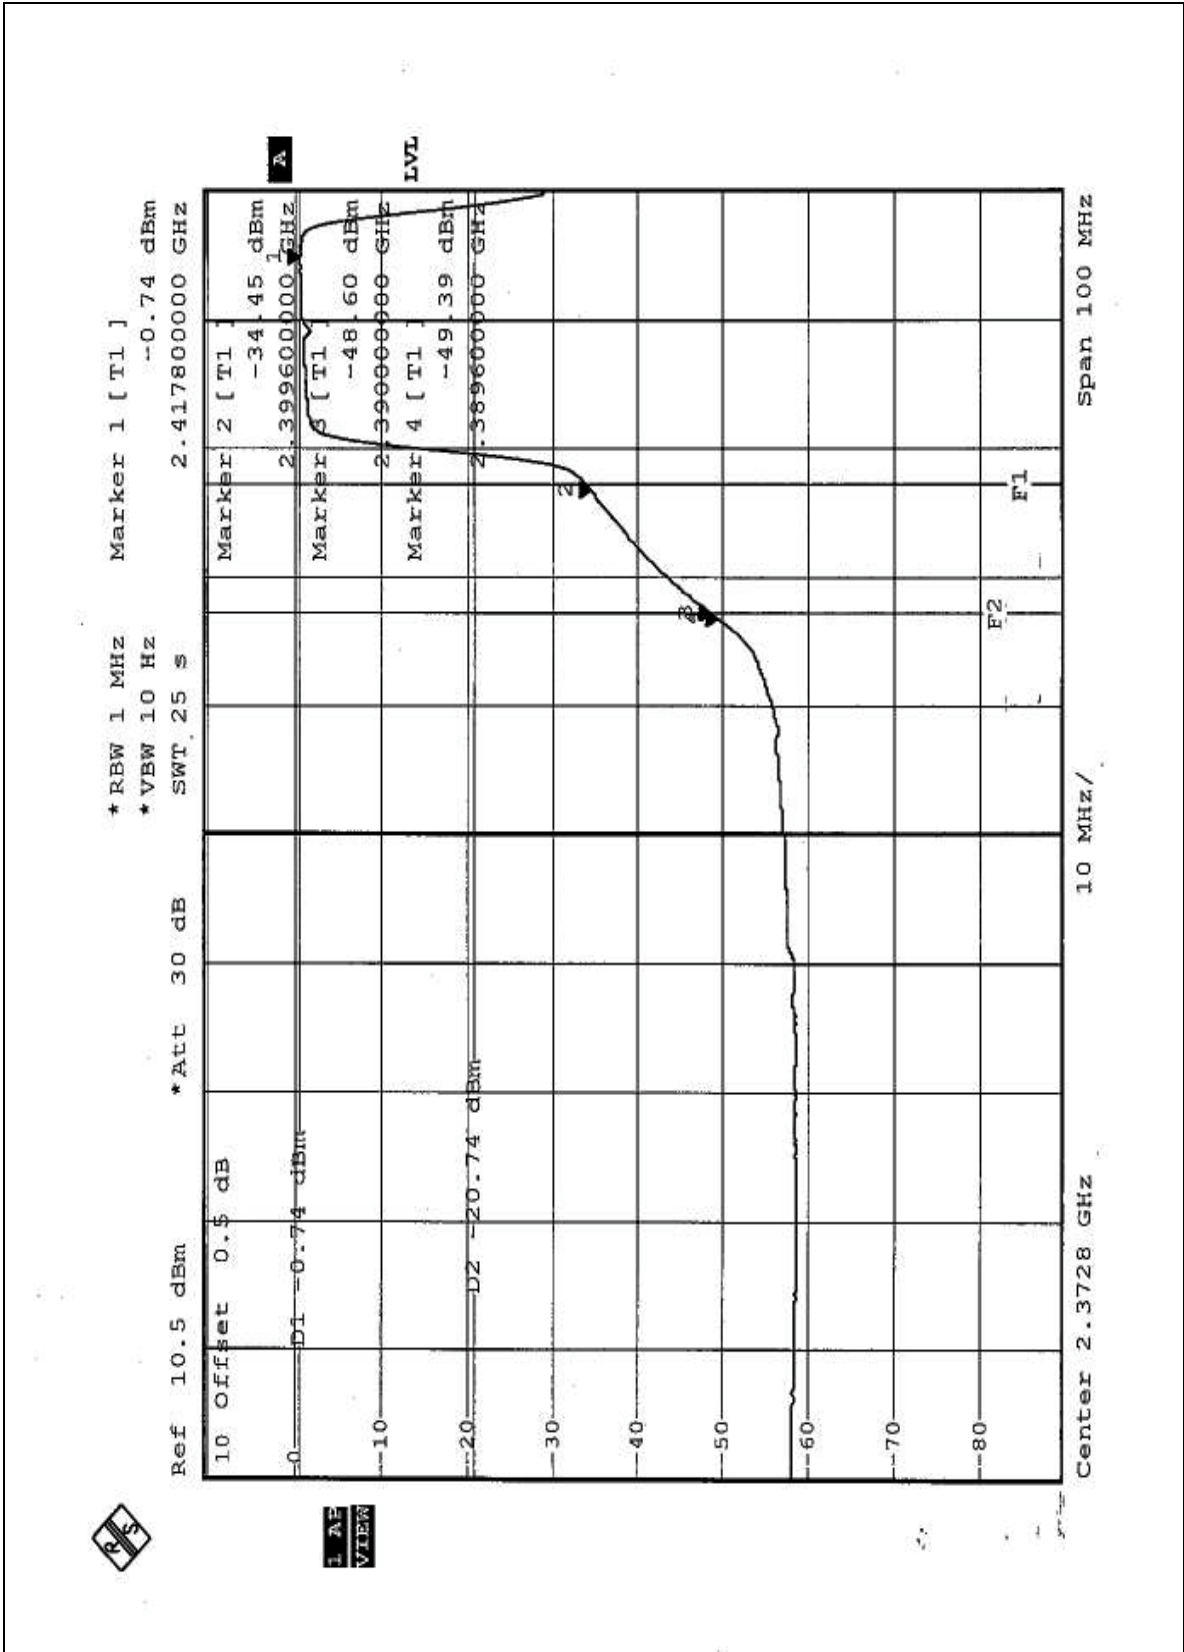



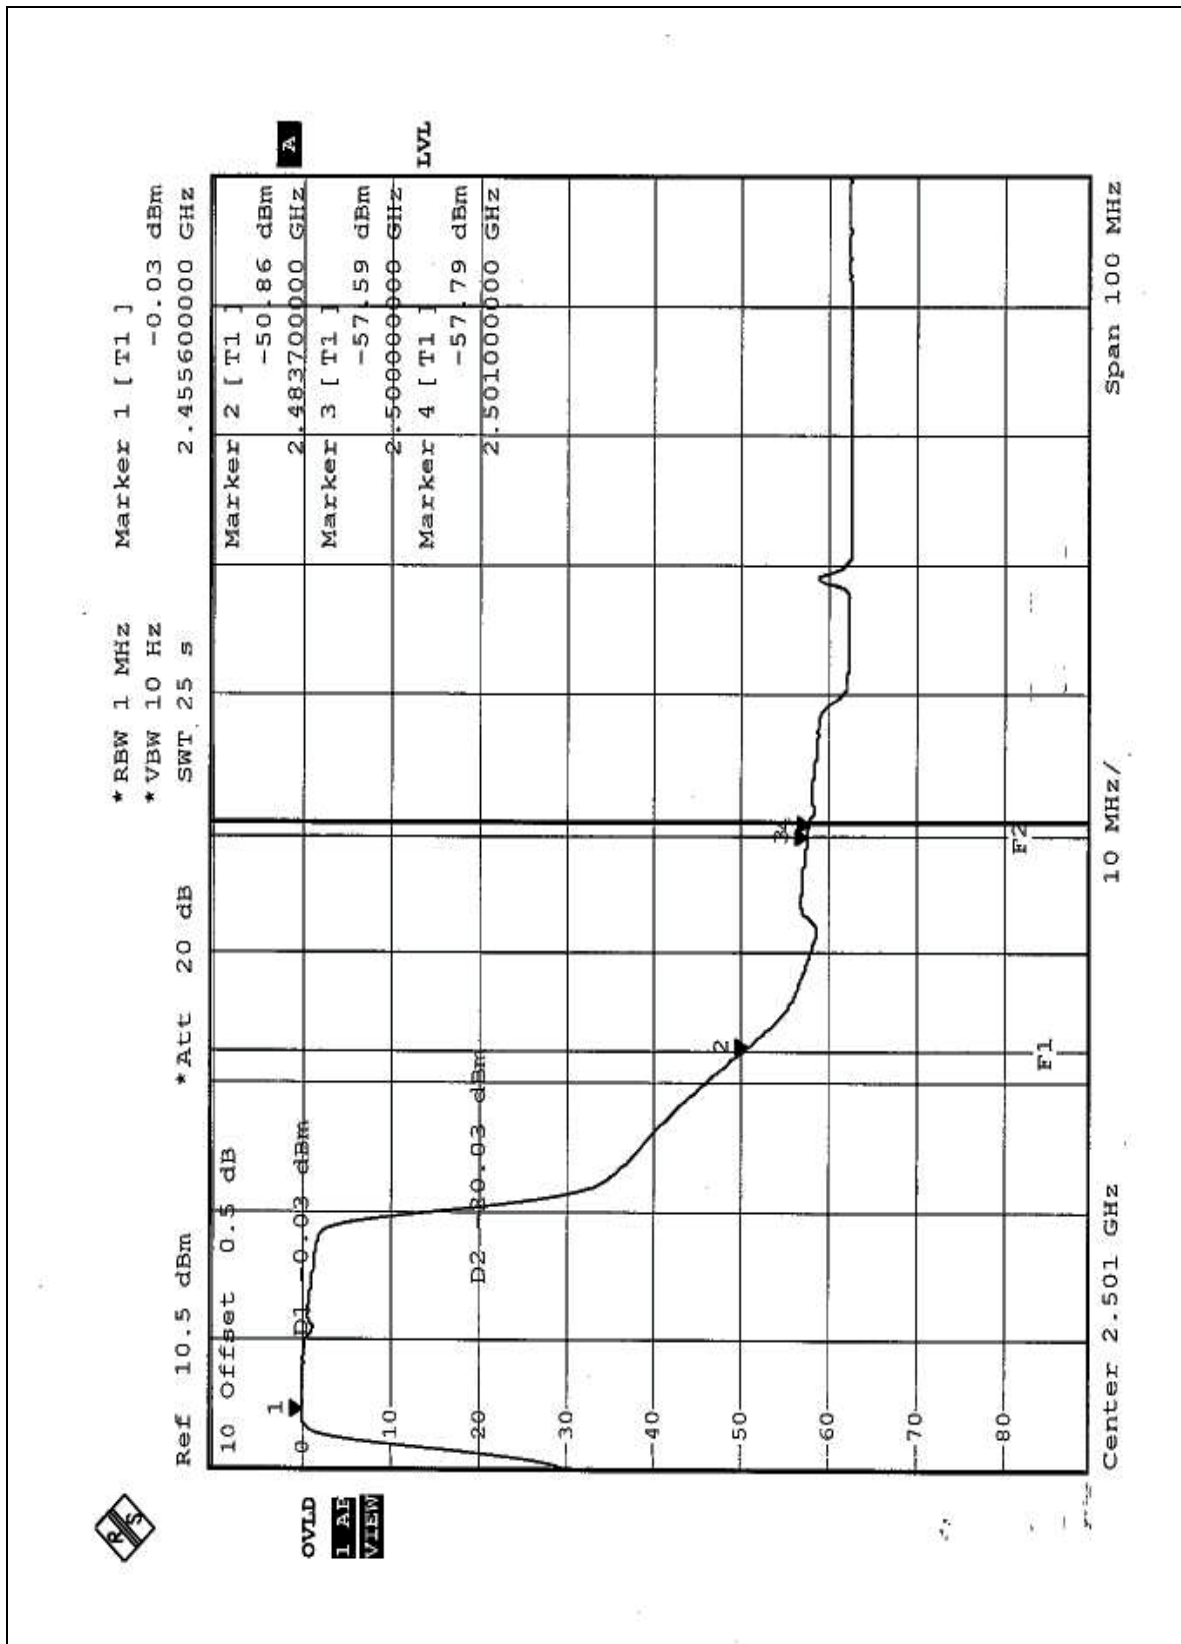

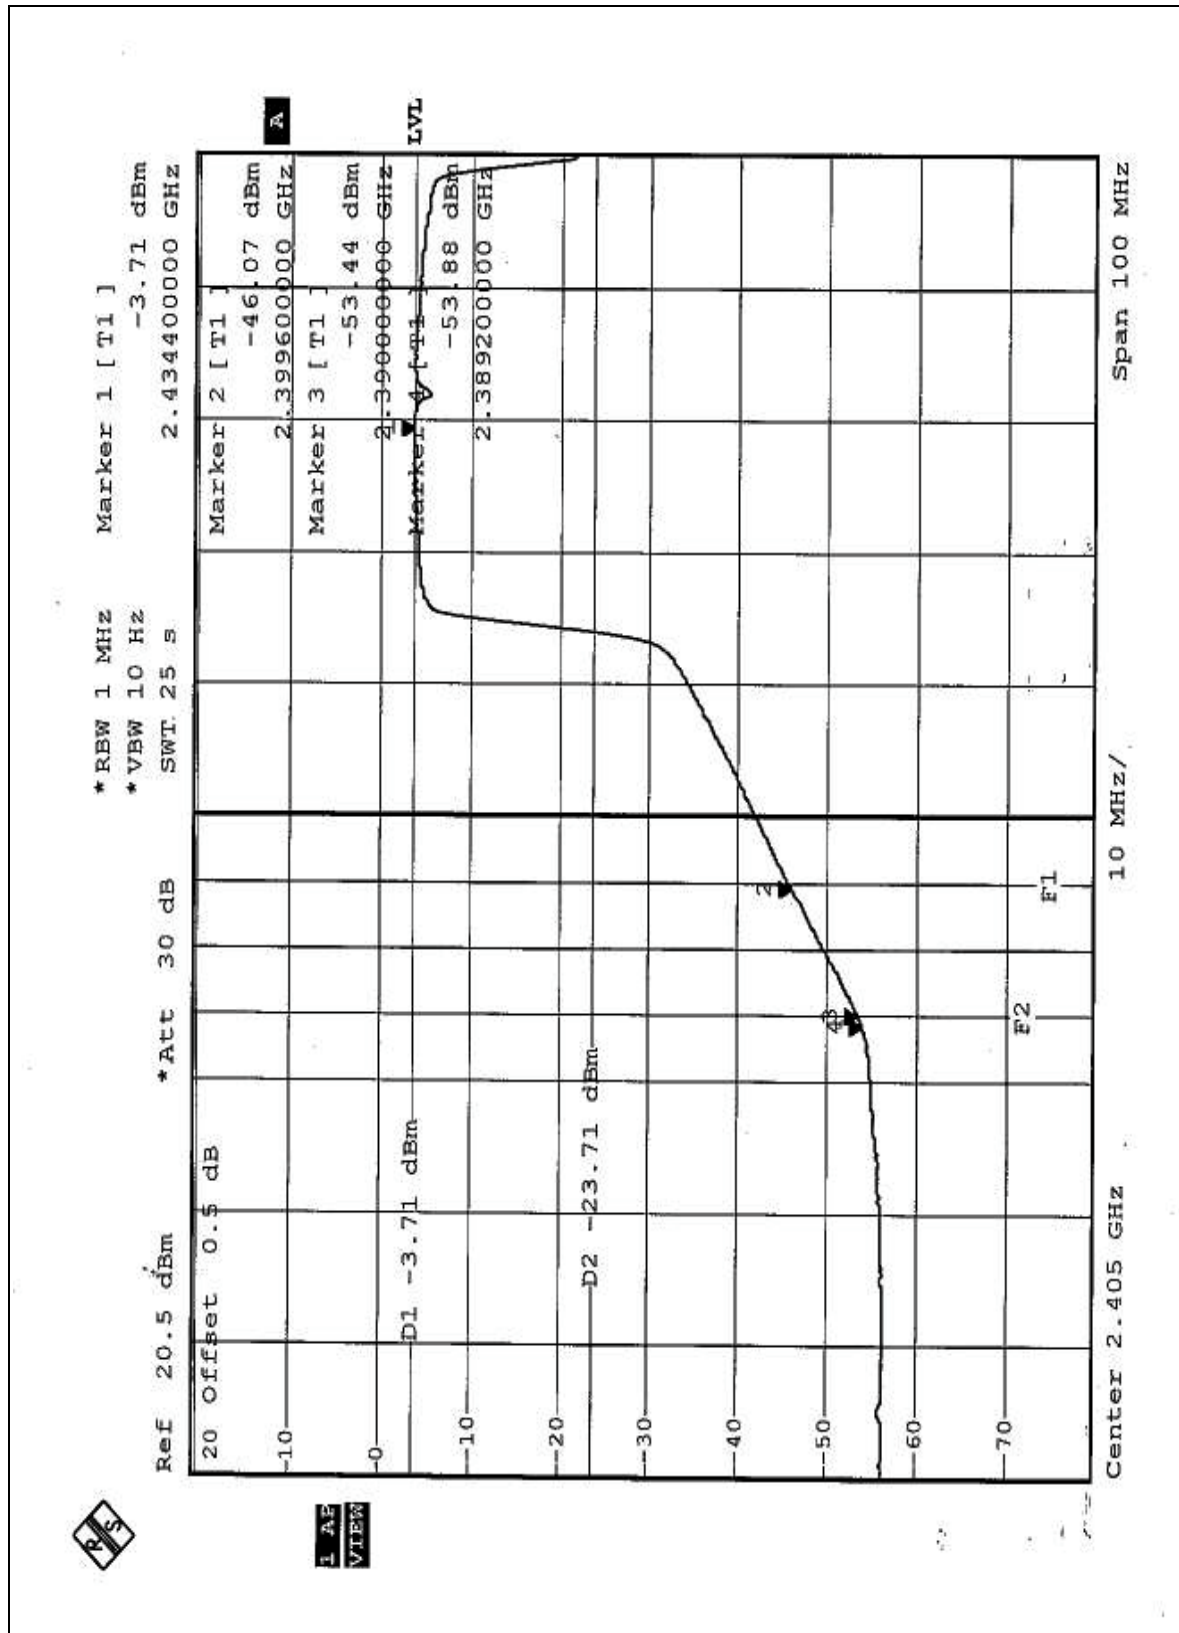

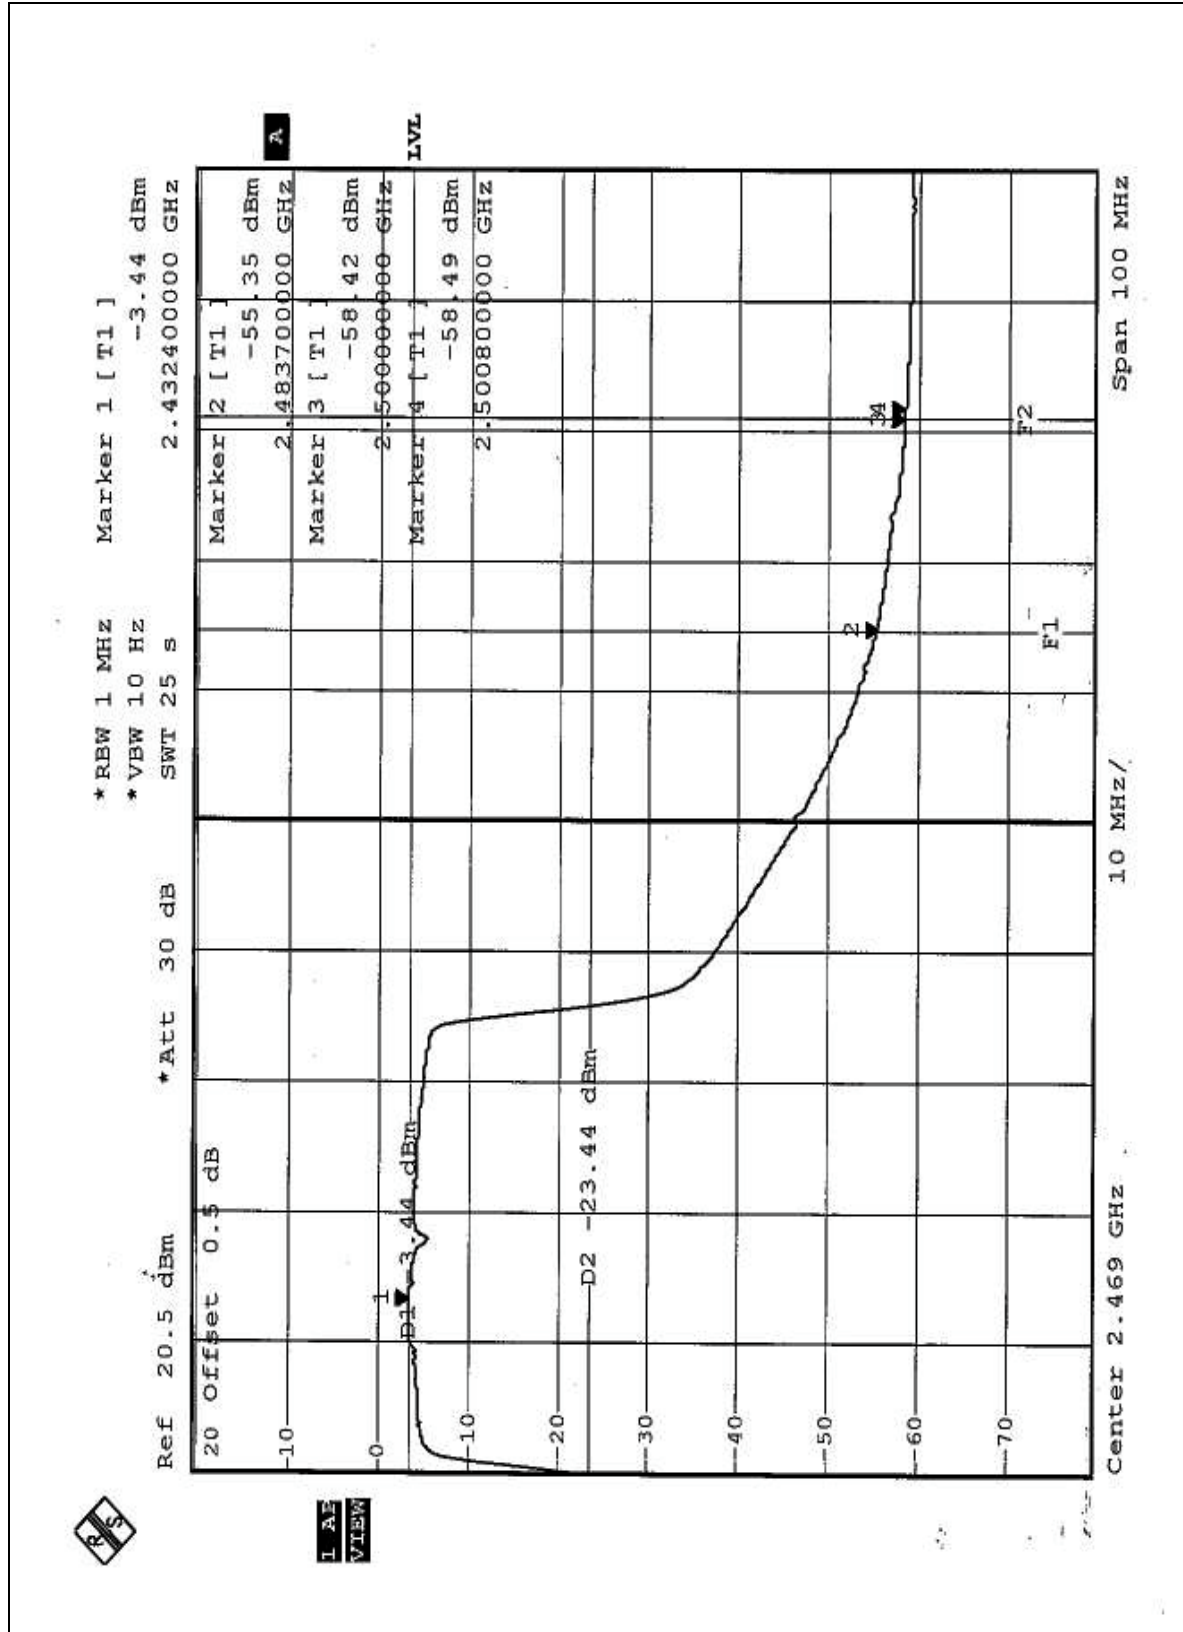



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The maximum Gain antenna used in this product is Dipole antenna with Reversed SMA antenna connector. And the maximum Gain of these antennas is 2dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232  
Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0