



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4217.82	44.42 PK	74	-29.58	-55.76	4.92	-50.84
2	3792.61	33 AV	54	-21	-67.18	4.92	-62.26
3	11013.42	43.74 PK	74	-30.26	-56.44	4.92	-51.52
4	7260.26	32.83 AV	54	-21.17	-67.35	4.92	-62.43
5	21042.1	46.04 PK	74	-27.96	-54.14	4.92	-49.22
6	21142.4	33.93 AV	54	-20.07	-66.25	4.92	-61.33
7	22243.9	47.59 PK	74	-26.41	-52.59	4.92	-47.67
8	23656.5	35.29 AV	54	-18.71	-64.89	4.92	-59.97
9	38933.6	40.25 PK	74	-33.75	-59.93	4.92	-55.01
10	38827.29	28.65 AV	54	-25.35	-71.53	4.92	-66.61

Note: Margin value = Emission Level - Limit value

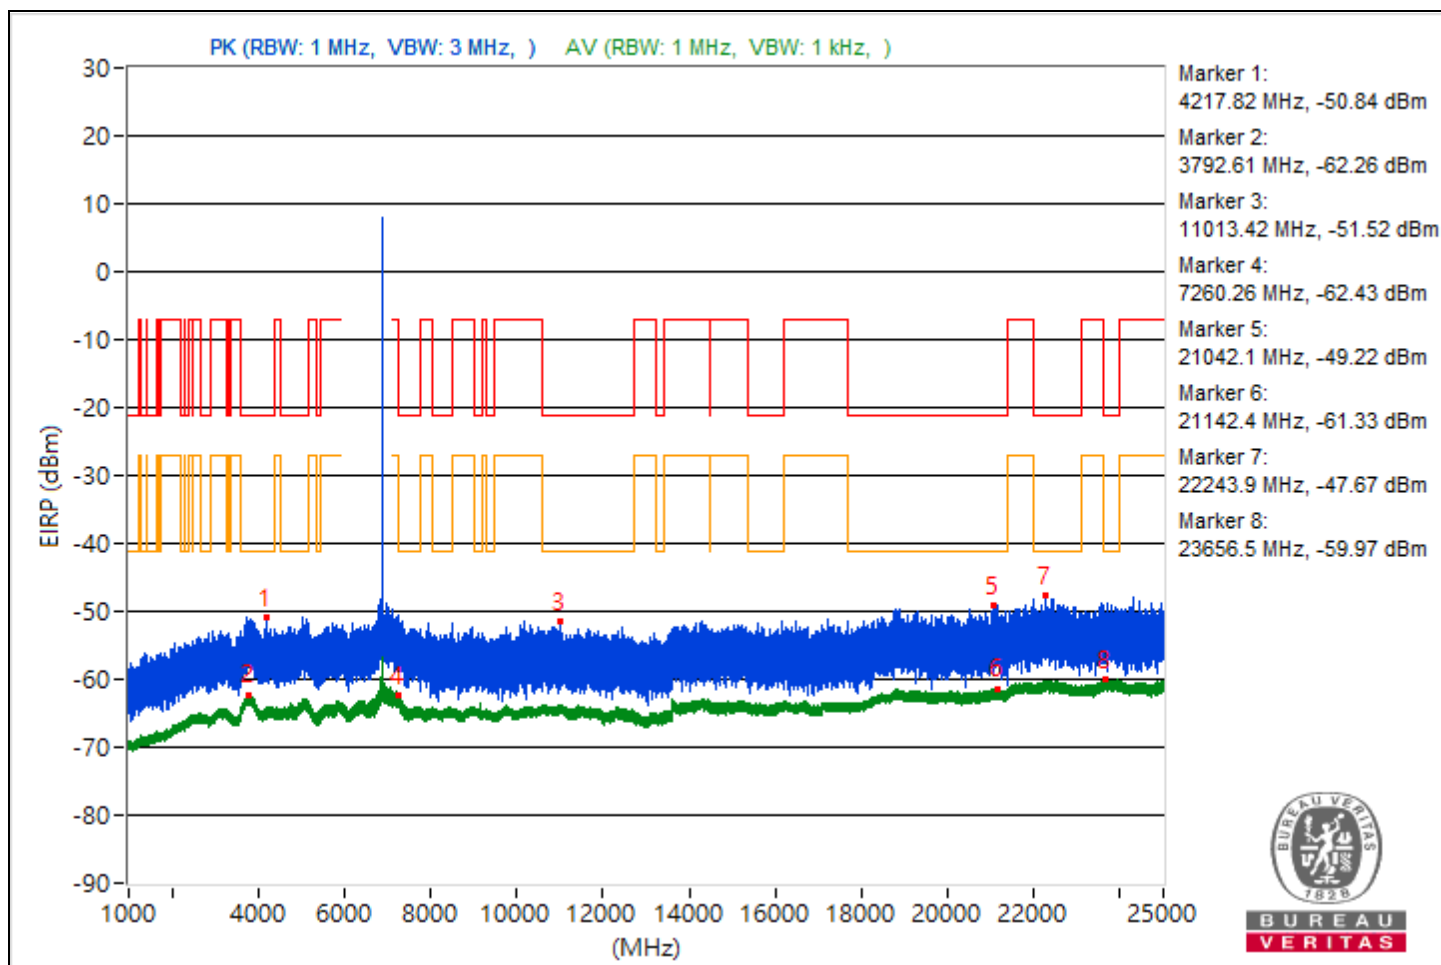


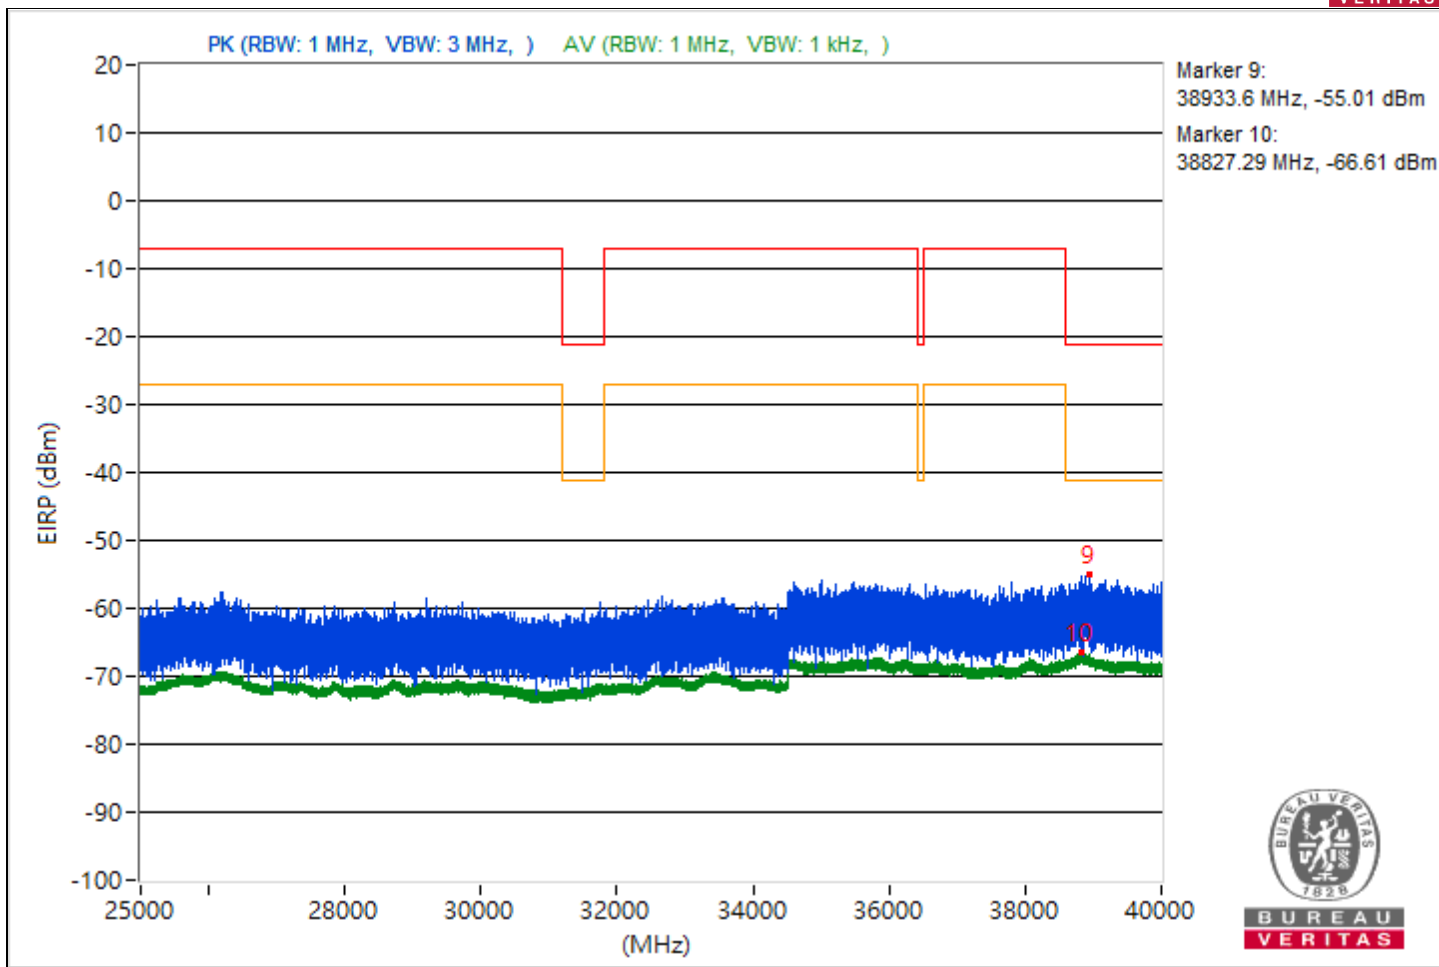


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4210.36	44.6 PK	74	-29.4	-55.58	4.92	-50.66
2	3839.9	32.98 AV	54	-21.02	-67.2	4.92	-62.28
3	7272.31	44.87 PK	74	-29.13	-55.31	4.92	-50.39
4	7261.66	33.75 AV	54	-20.25	-66.43	4.92	-61.51
5	19461	45.73 PK	74	-28.27	-54.45	4.92	-49.53
6	21154	33.81 AV	54	-20.19	-66.37	4.92	-61.45
7	23805	46.75 PK	74	-27.25	-53.43	4.92	-48.51
8	23895.5	35.13 AV	54	-18.87	-65.05	4.92	-60.13
9	38873.87	40.38 PK	74	-33.62	-59.8	4.92	-54.88
10	38862.84	28.53 AV	54	-25.47	-71.65	4.92	-66.73

Note: Margin value = Emission Level - Limit value

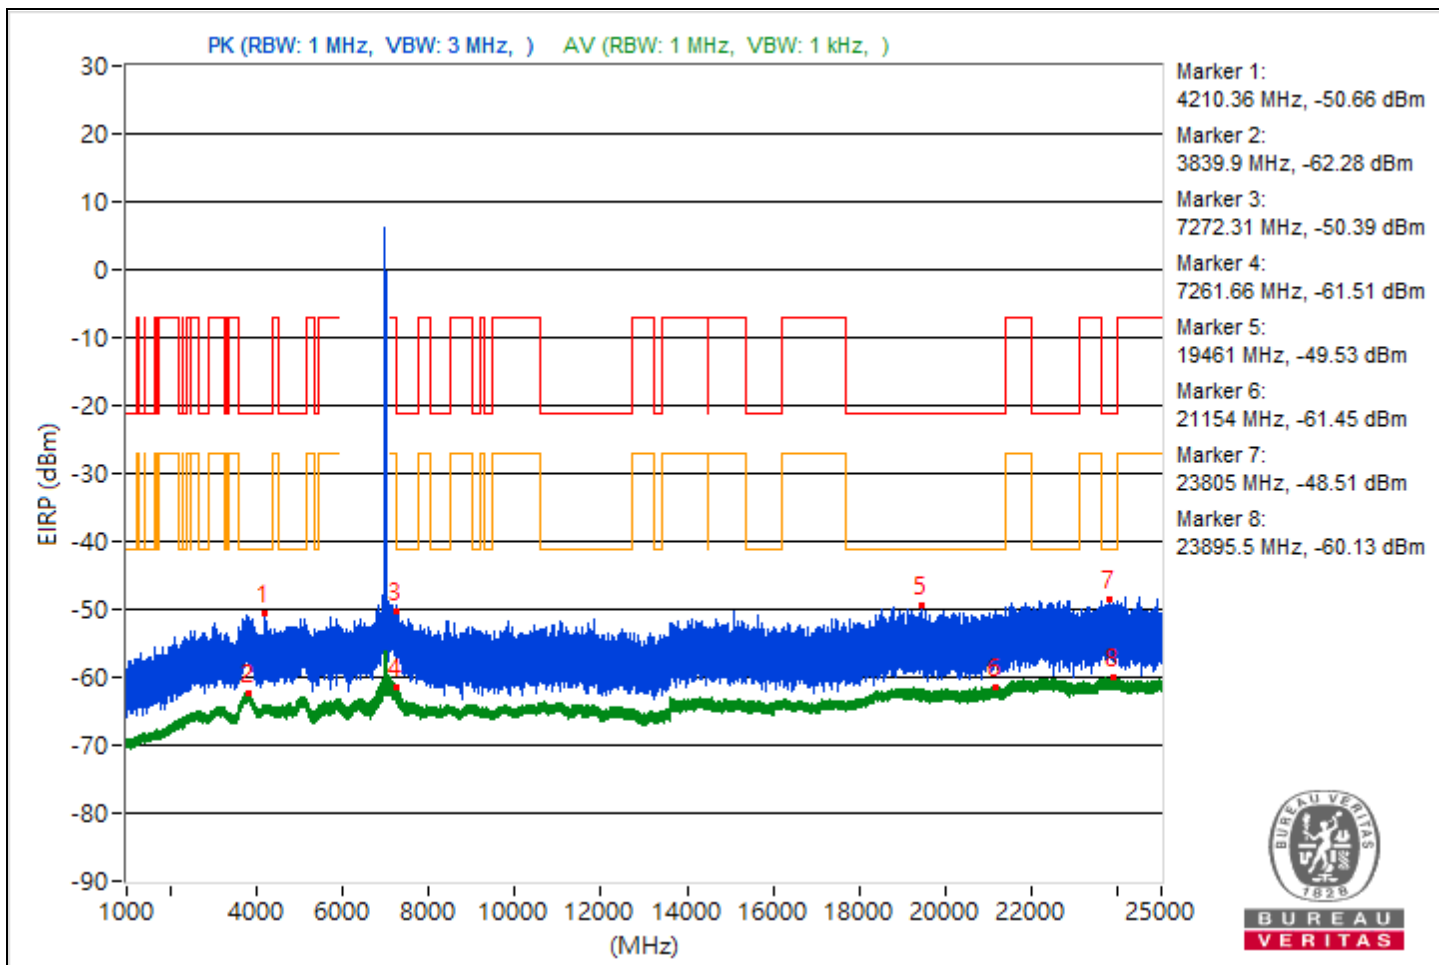


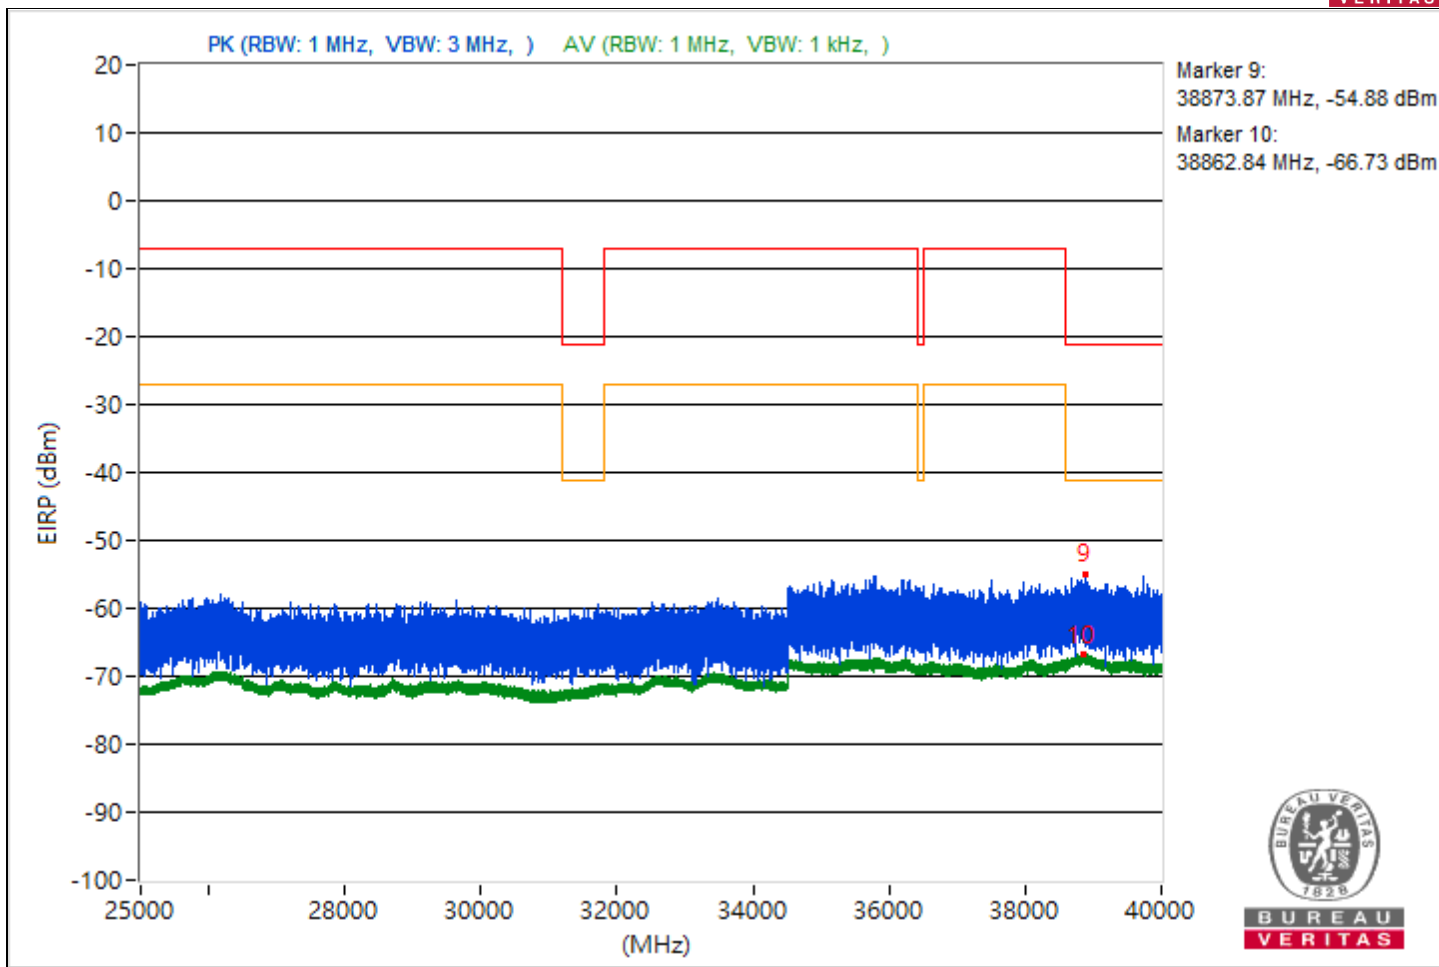


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.51	45.2 PK	74	-28.8	-54.98	4.92	-50.06
2	3790.51	32.99 AV	54	-21.01	-67.19	4.92	-62.27
3	7256.13	45.33 PK	74	-28.67	-54.85	4.92	-49.93
4	7259.17	34.41 AV	54	-19.59	-65.77	4.92	-60.85
5	21189.1	45.46 PK	74	-28.54	-54.72	4.92	-49.8
6	21141.8	33.87 AV	54	-20.13	-66.31	4.92	-61.39
7	22670.5	47.06 PK	74	-26.94	-53.12	4.92	-48.2
8	22282.4	35.18 AV	54	-18.82	-65	4.92	-60.08
9	38988.18	39.46 PK	74	-34.54	-60.72	4.92	-55.8
10	38840.8	28.79 AV	54	-25.21	-71.39	4.92	-66.47

Note: Margin value = Emission Level - Limit value

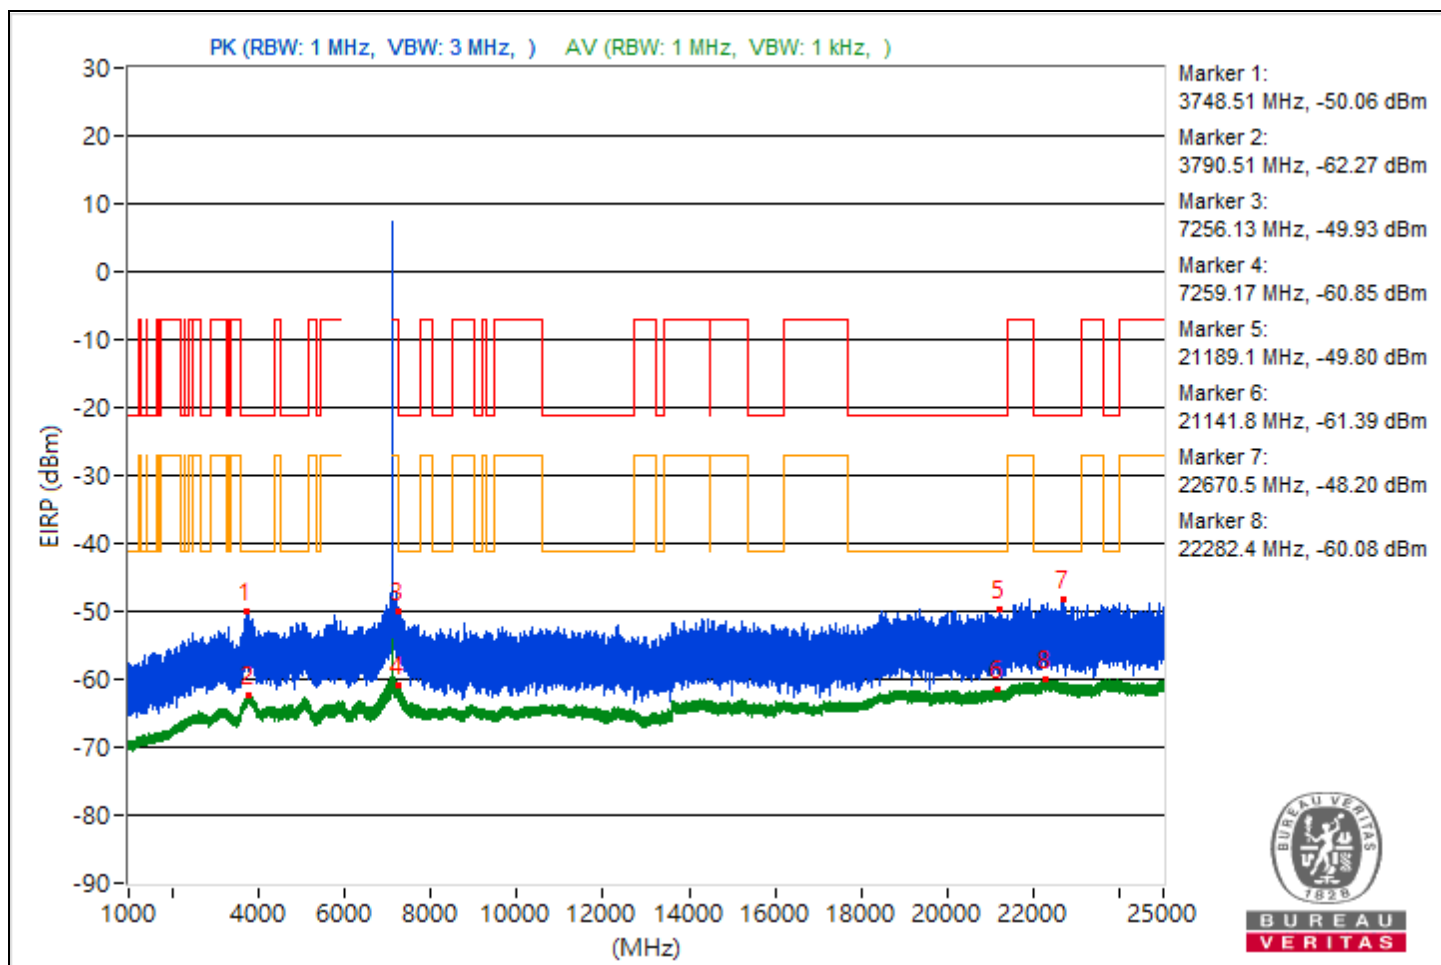

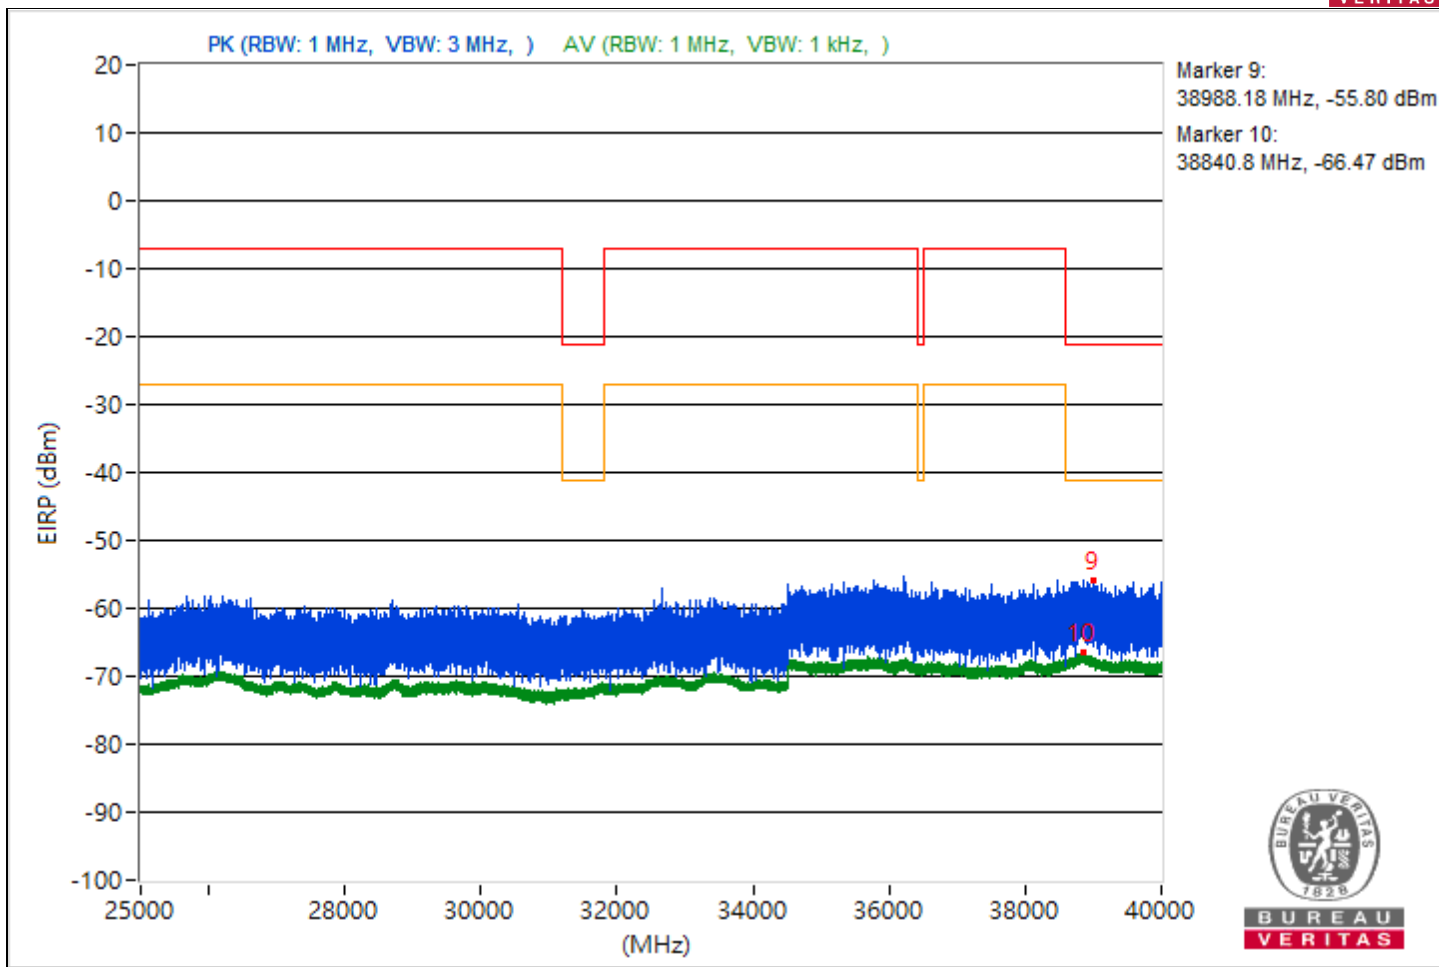





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5440.64	46.37 PK	74	-27.63	-53.81	4.92	-48.89
2	5459.23	35.02 AV	54	-18.98	-65.16	4.92	-60.24
3	15959.38	43.87 PK	74	-30.13	-56.31	4.92	-51.39
4	#7980.09	47.74 AV	68.26	-20.52	-52.44	4.92	-47.52
5	21197.9	45.56 PK	74	-28.44	-54.62	4.92	-49.7
6	21145.1	33.95 AV	54	-20.05	-66.23	4.92	-61.31
7	22224.2	46.35 PK	74	-27.65	-53.83	4.92	-48.91
8	22294.7	35.22 AV	54	-18.78	-64.96	4.92	-60.04
9	38835.56	40.52 PK	74	-33.48	-59.66	4.92	-54.74
10	38866.76	28.61 AV	54	-25.39	-71.57	4.92	-66.65

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

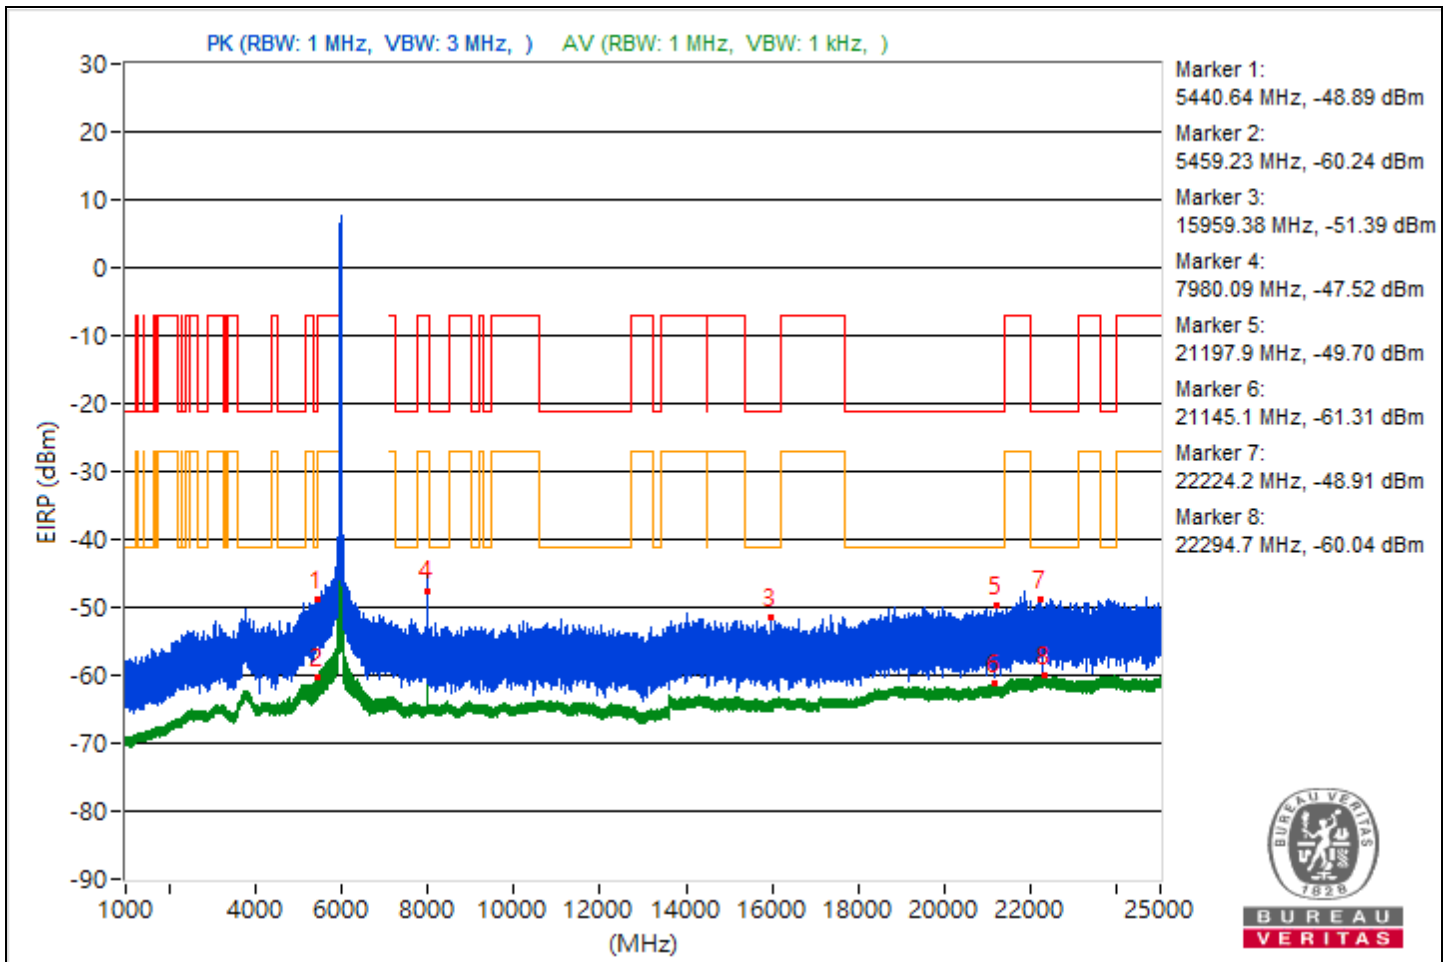


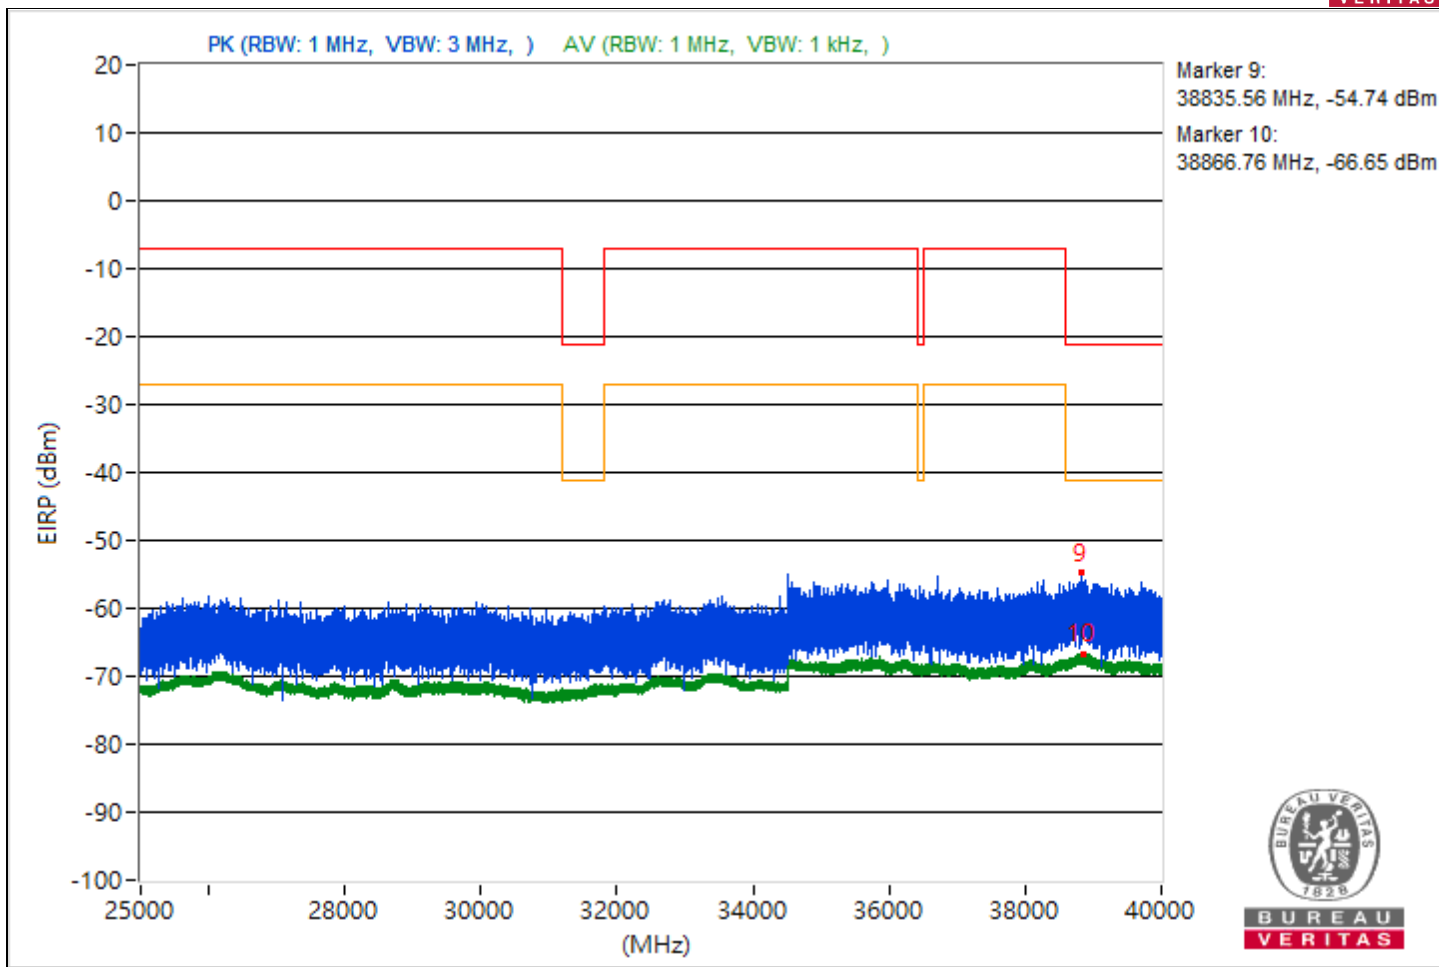


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.93	45.18 PK	74	-28.82	-55	4.92	-50.08
2	5457.29	33.52 AV	54	-20.48	-66.66	4.92	-61.74
3	7275.58	44.14 PK	74	-29.86	-56.04	4.92	-51.12
4	7279.86	32.71 AV	54	-21.29	-67.47	4.92	-62.55
5	21109.8	46.18 PK	74	-27.82	-54	4.92	-49.08
6	21152.4	33.94 AV	54	-20.06	-66.24	4.92	-61.32
7	23783.8	47.67 PK	74	-26.33	-52.51	4.92	-47.59
8	23810.2	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	39117.07	40.44 PK	74	-33.56	-59.74	4.92	-54.82
10	38852.89	28.64 AV	54	-25.36	-71.54	4.92	-66.62

Note: Margin value = Emission Level - Limit value

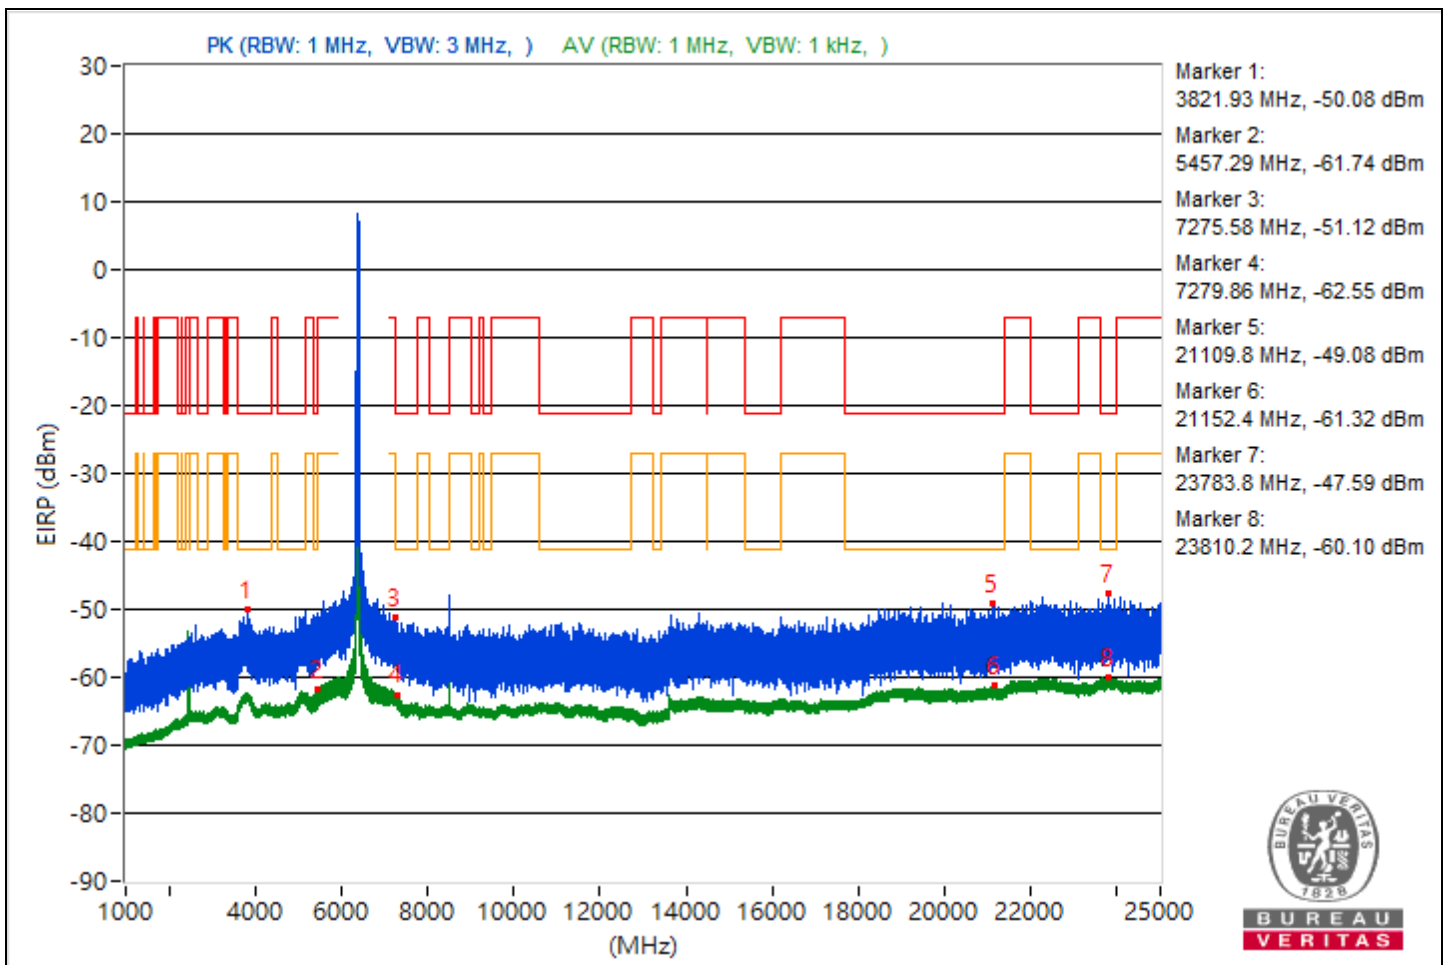


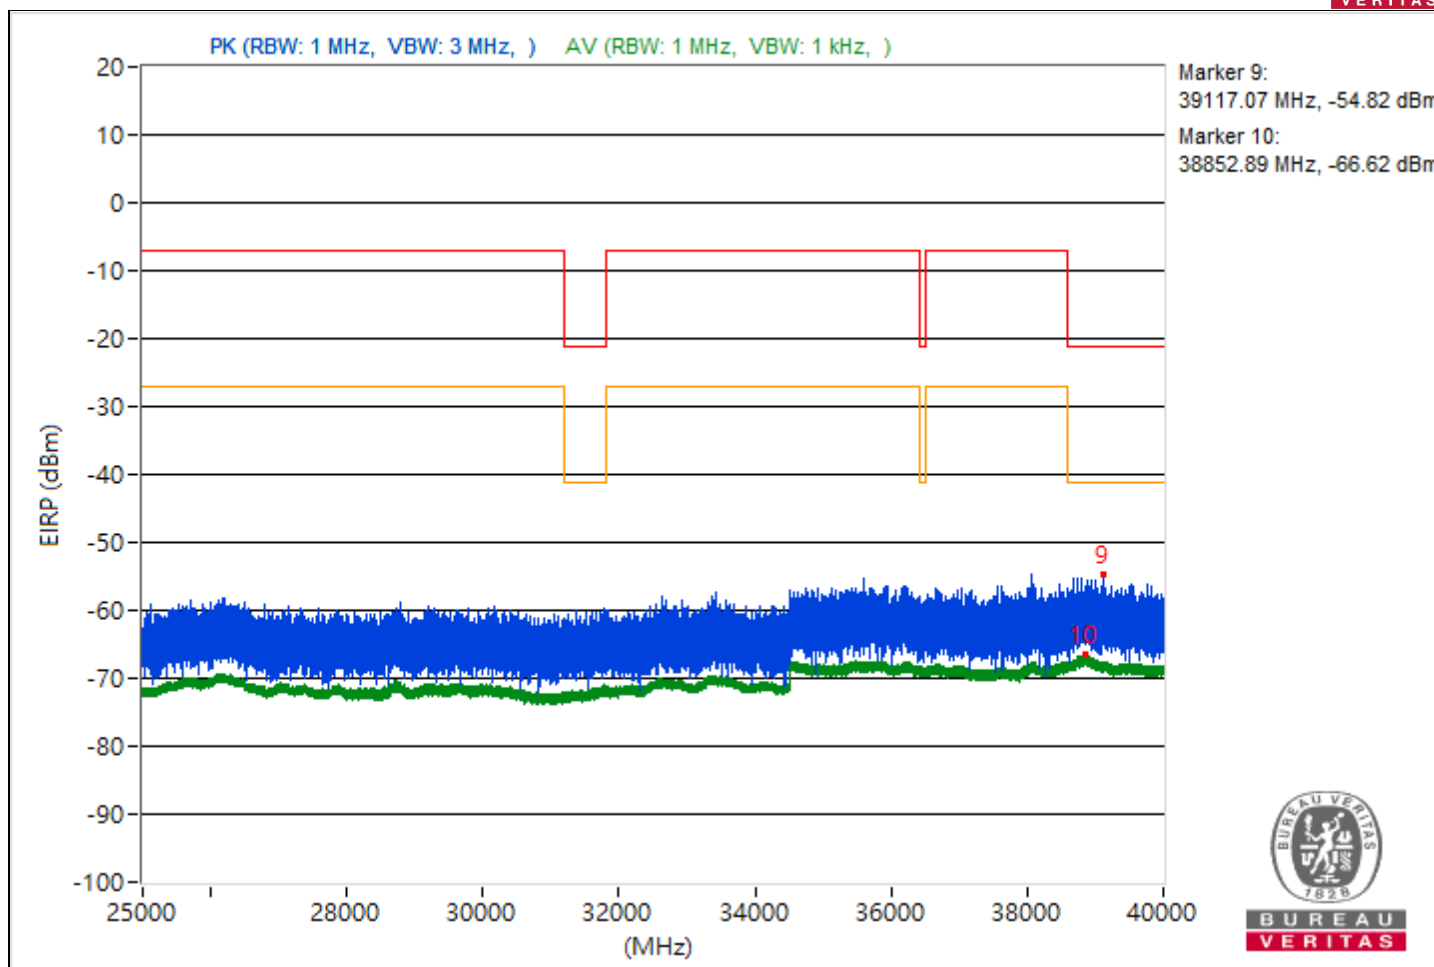


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.36	44.49 PK	74	-29.51	-55.69	4.92	-50.77
2	5452.54	33.25 AV	54	-20.75	-66.93	4.92	-62.01
3	15380.53	44.46 PK	74	-29.54	-55.72	4.92	-50.8
4	7251.39	33.11 AV	54	-20.89	-67.07	4.92	-62.15
5	19058.4	46.16 PK	74	-27.84	-54.02	4.92	-49.1
6	21150.6	33.9 AV	54	-20.1	-66.28	4.92	-61.36
7	22683.5	46.61 PK	74	-27.39	-53.57	4.92	-48.65
8	23623.2	35.1 AV	54	-18.9	-65.08	4.92	-60.16
9	38852.27	39.6 PK	74	-34.4	-60.58	4.92	-55.66
10	38795.91	28.72 AV	54	-25.28	-71.46	4.92	-66.54

Note: Margin value = Emission Level - Limit value

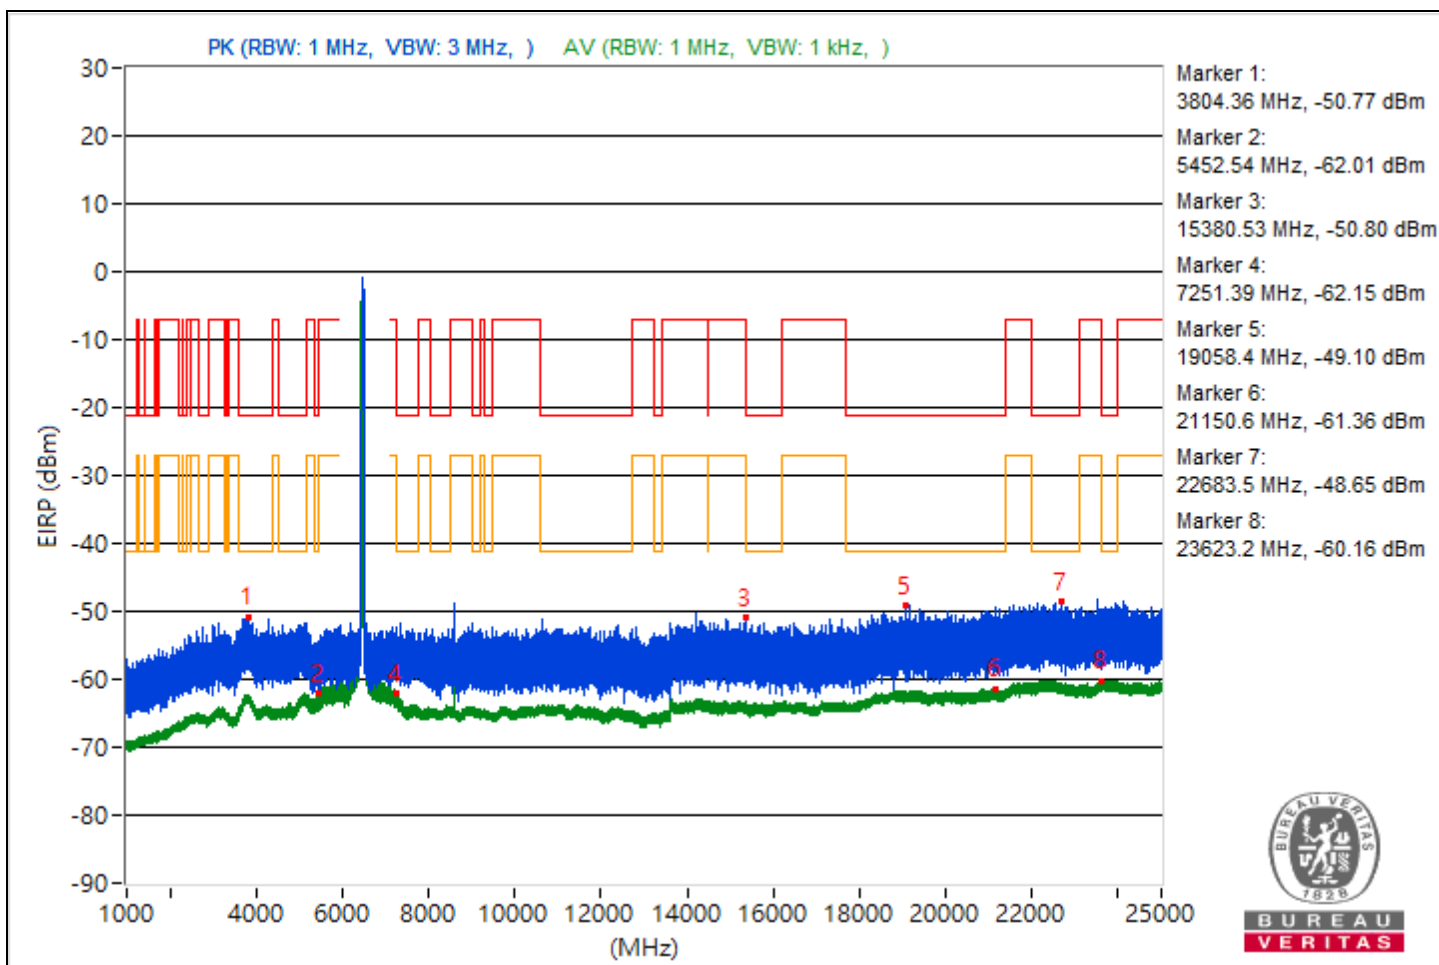


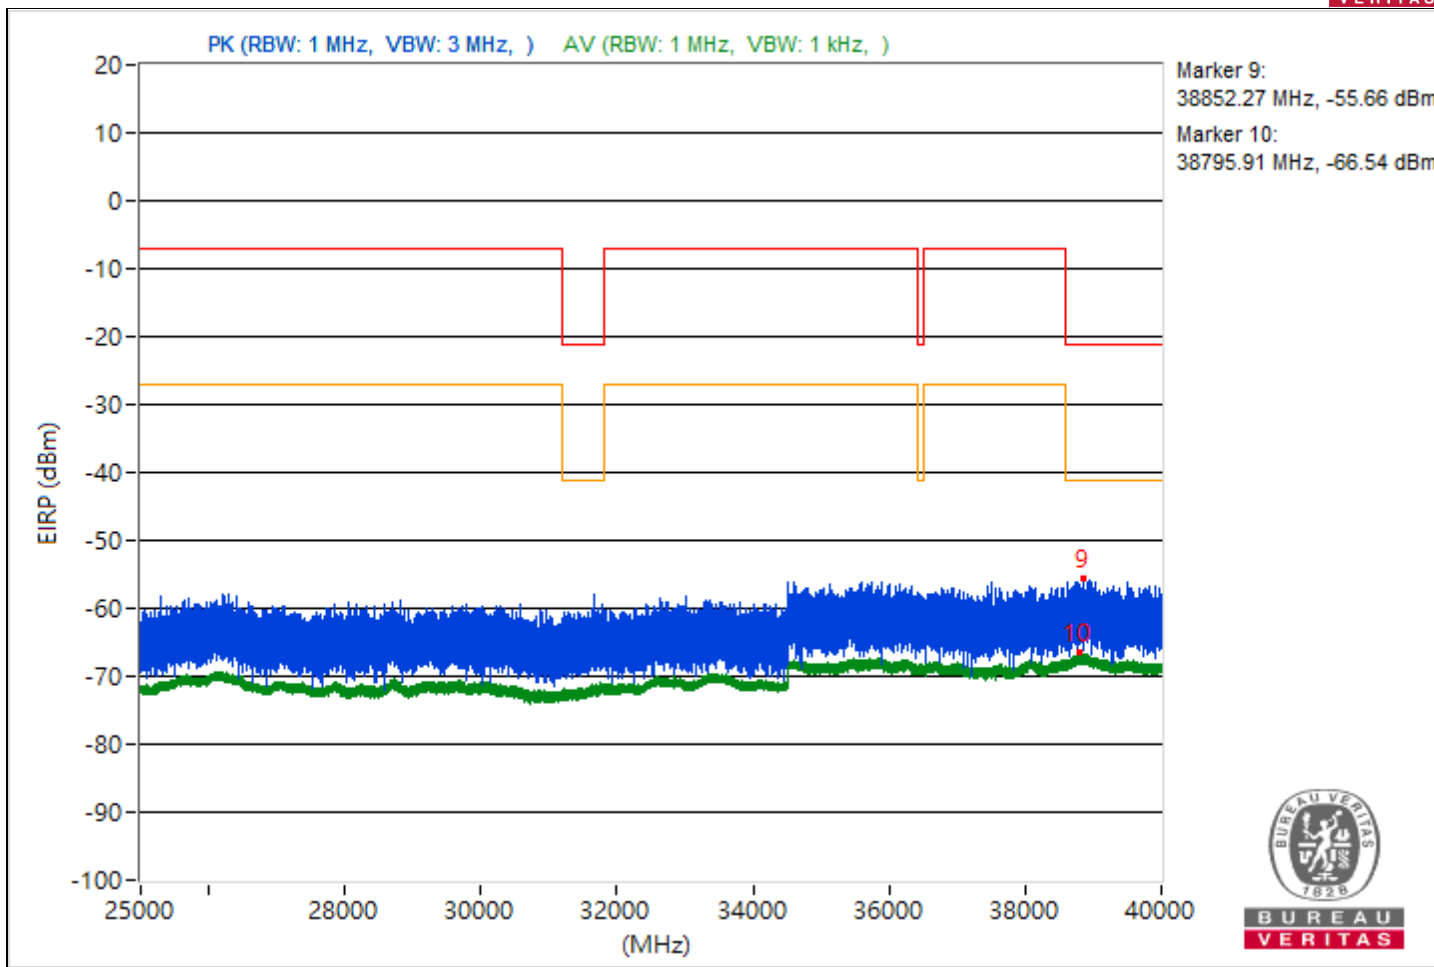


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3778.53	44.47 PK	74	-29.53	-55.71	4.92	-50.79
2	3815.32	32.84 AV	54	-21.16	-67.34	4.92	-62.42
3	15626.84	44.04 PK	74	-29.96	-56.14	4.92	-51.22
4	7269.67	32.83 AV	54	-21.17	-67.35	4.92	-62.43
5	21290.4	46.24 PK	74	-27.76	-53.94	4.92	-49.02
6	21101.7	33.91 AV	54	-20.09	-66.27	4.92	-61.35
7	22477.4	47.41 PK	74	-26.59	-52.77	4.92	-47.85
8	22352.3	35.15 AV	54	-18.85	-65.03	4.92	-60.11
9	38874.22	39.77 PK	74	-34.23	-60.41	4.92	-55.49
10	38806.4	28.6 AV	54	-25.4	-71.58	4.92	-66.66

Note: Margin value = Emission Level - Limit value

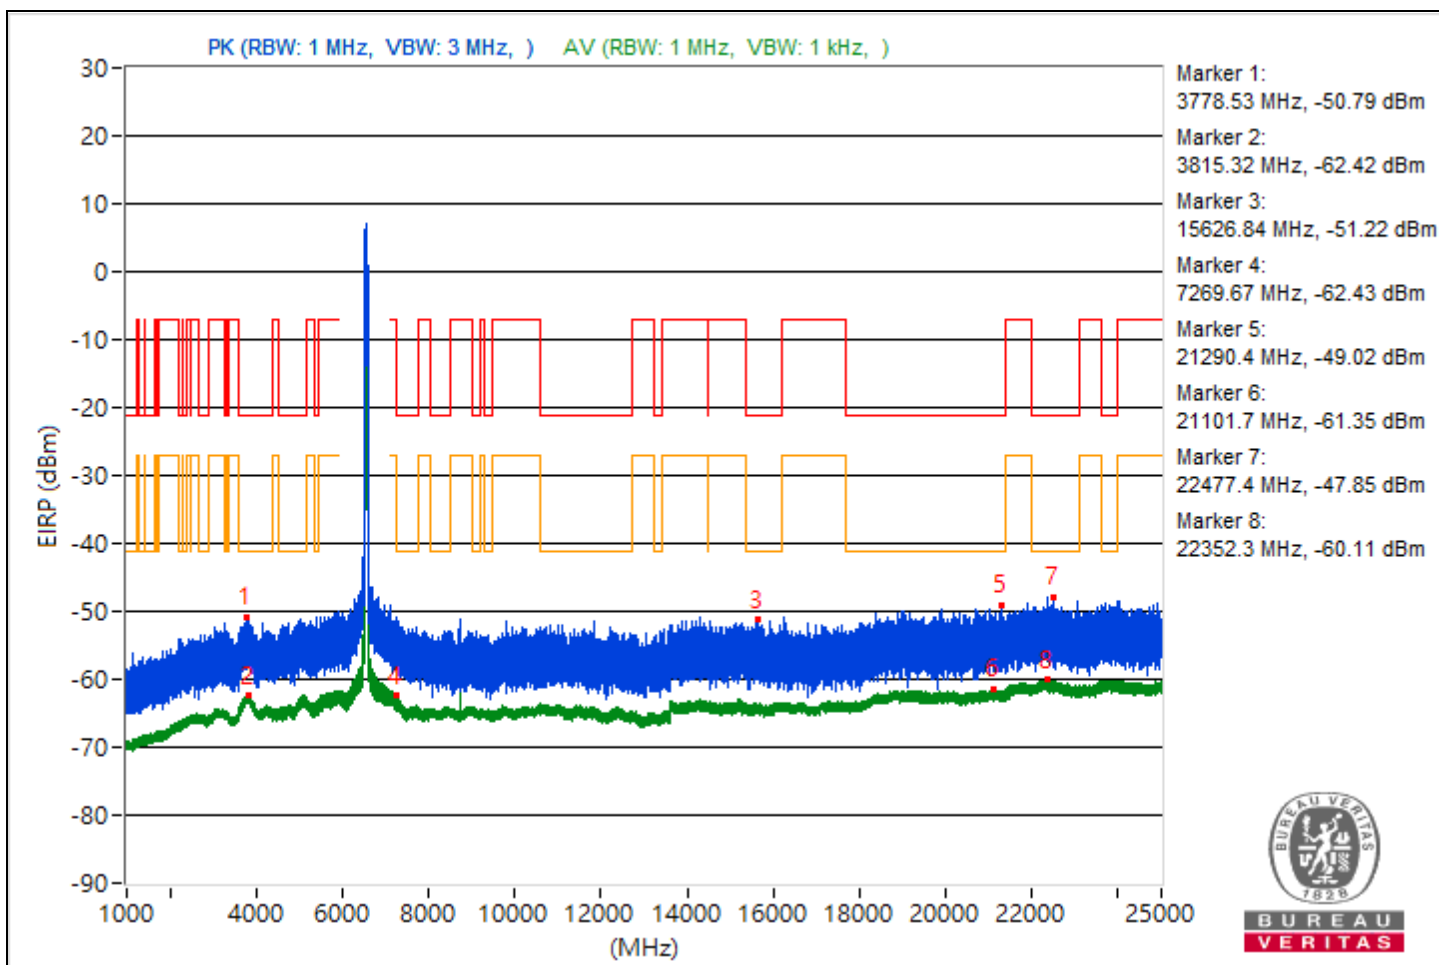


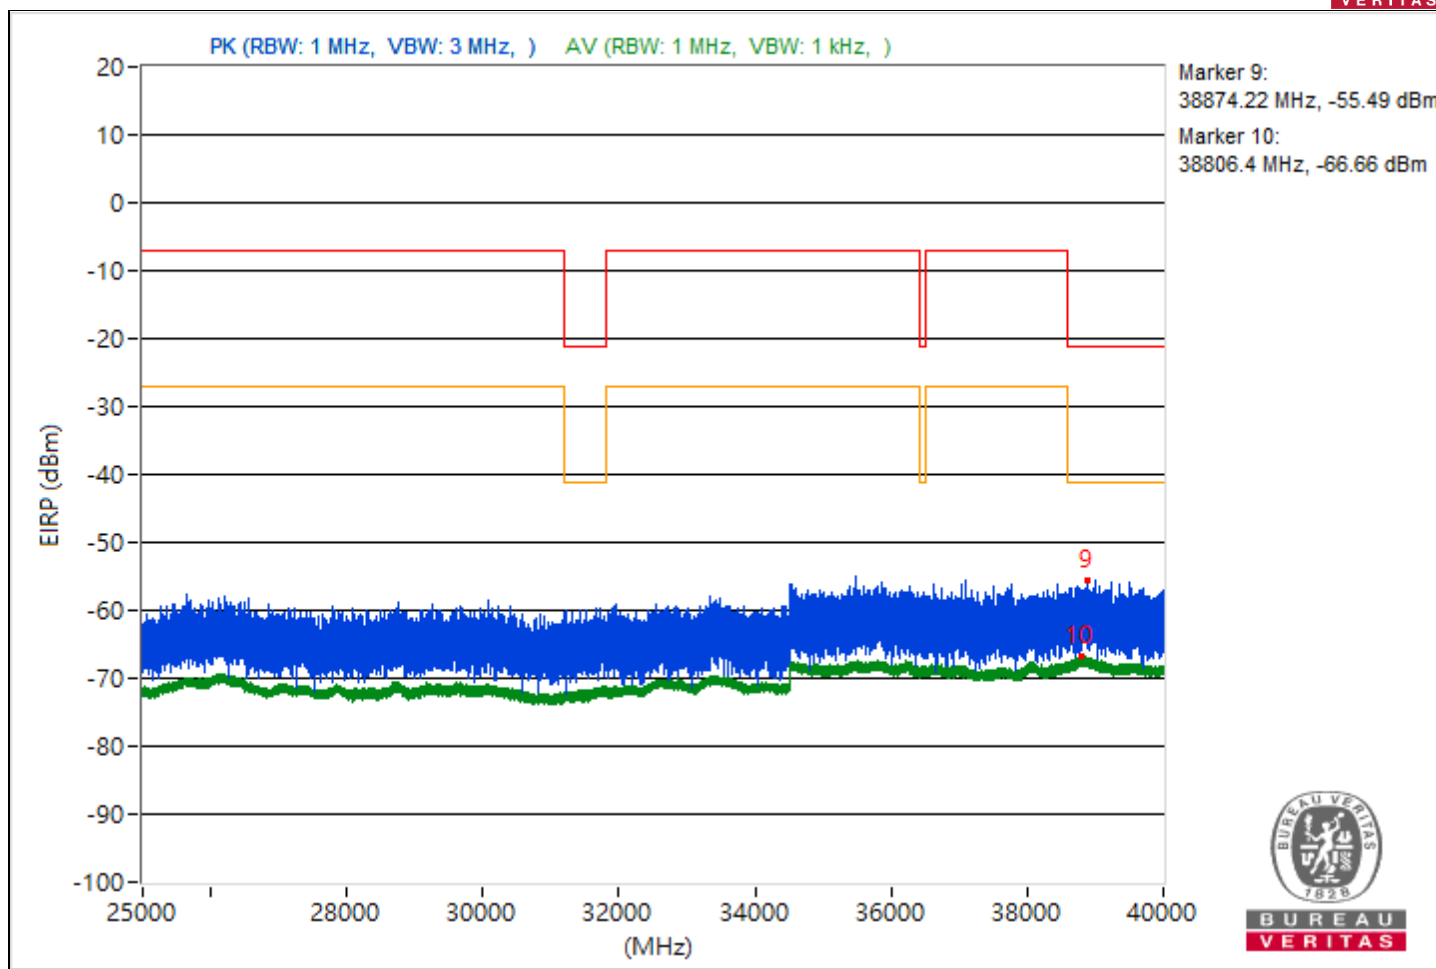


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5068.63	44.09 PK	74	-29.91	-56.09	4.92	-51.17
2	3820.69	32.85 AV	54	-21.15	-67.33	4.92	-62.41
3	7271.22	45.04 PK	74	-28.96	-55.14	4.92	-50.22
4	7251	34.21 AV	54	-19.79	-65.97	4.92	-61.05
5	20559.1	45.57 PK	74	-28.43	-54.61	4.92	-49.69
6	21146	33.96 AV	54	-20.04	-66.22	4.92	-61.3
7	23949.3	46.89 PK	74	-27.11	-53.29	4.92	-48.37
8	23777.9	35.2 AV	54	-18.8	-64.98	4.92	-60.06
9	38665.6	39.76 PK	74	-34.24	-60.42	4.92	-55.5
10	38812.53	28.57 AV	54	-25.43	-71.61	4.92	-66.69

Note: Margin value = Emission Level - Limit value

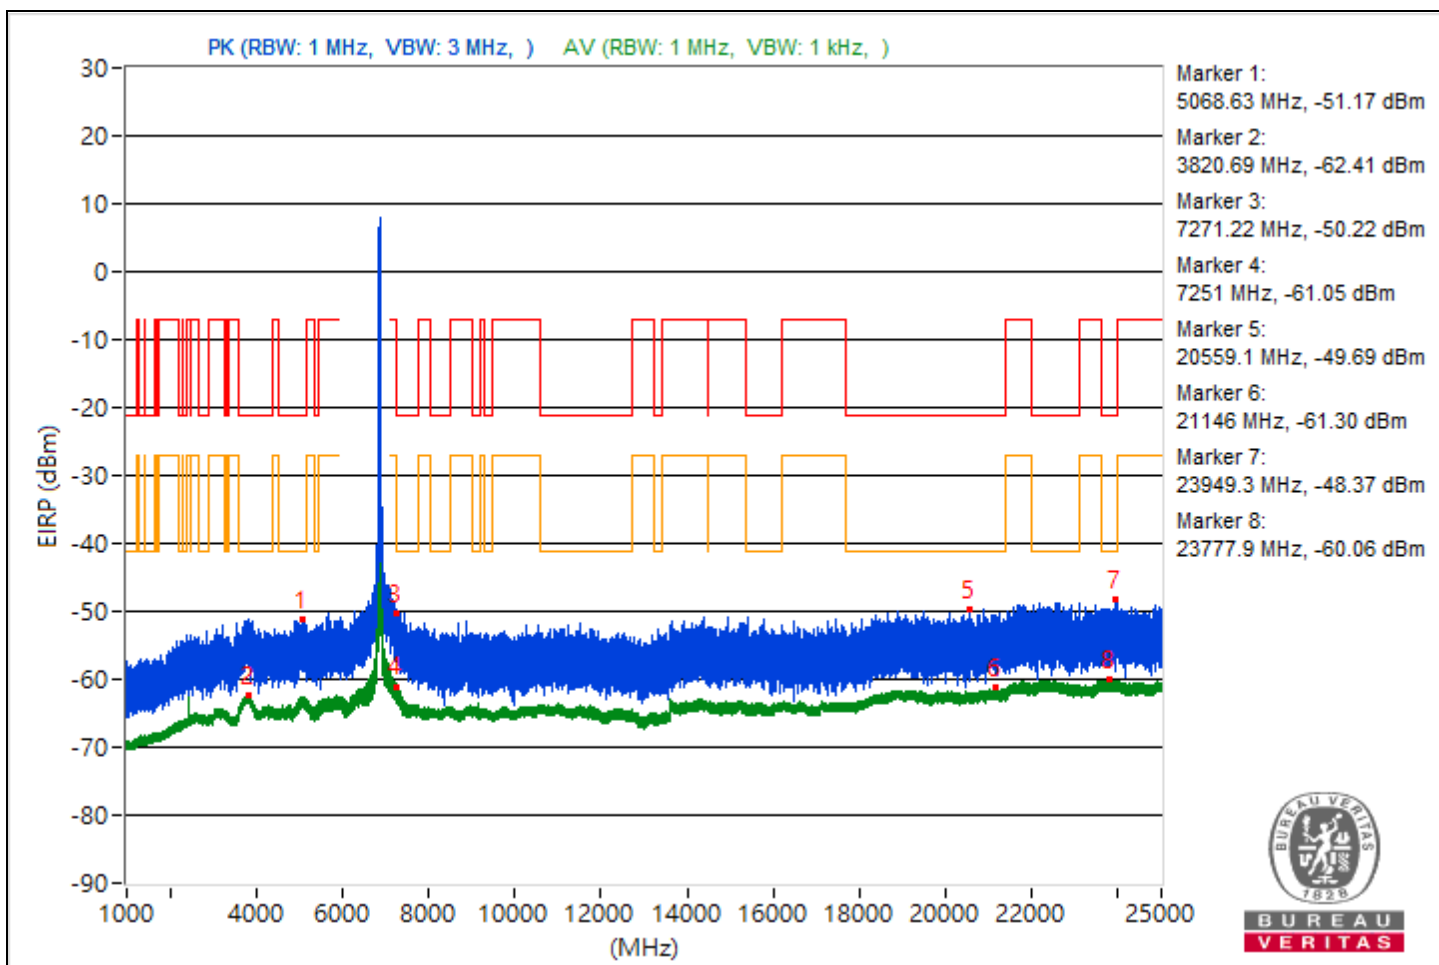

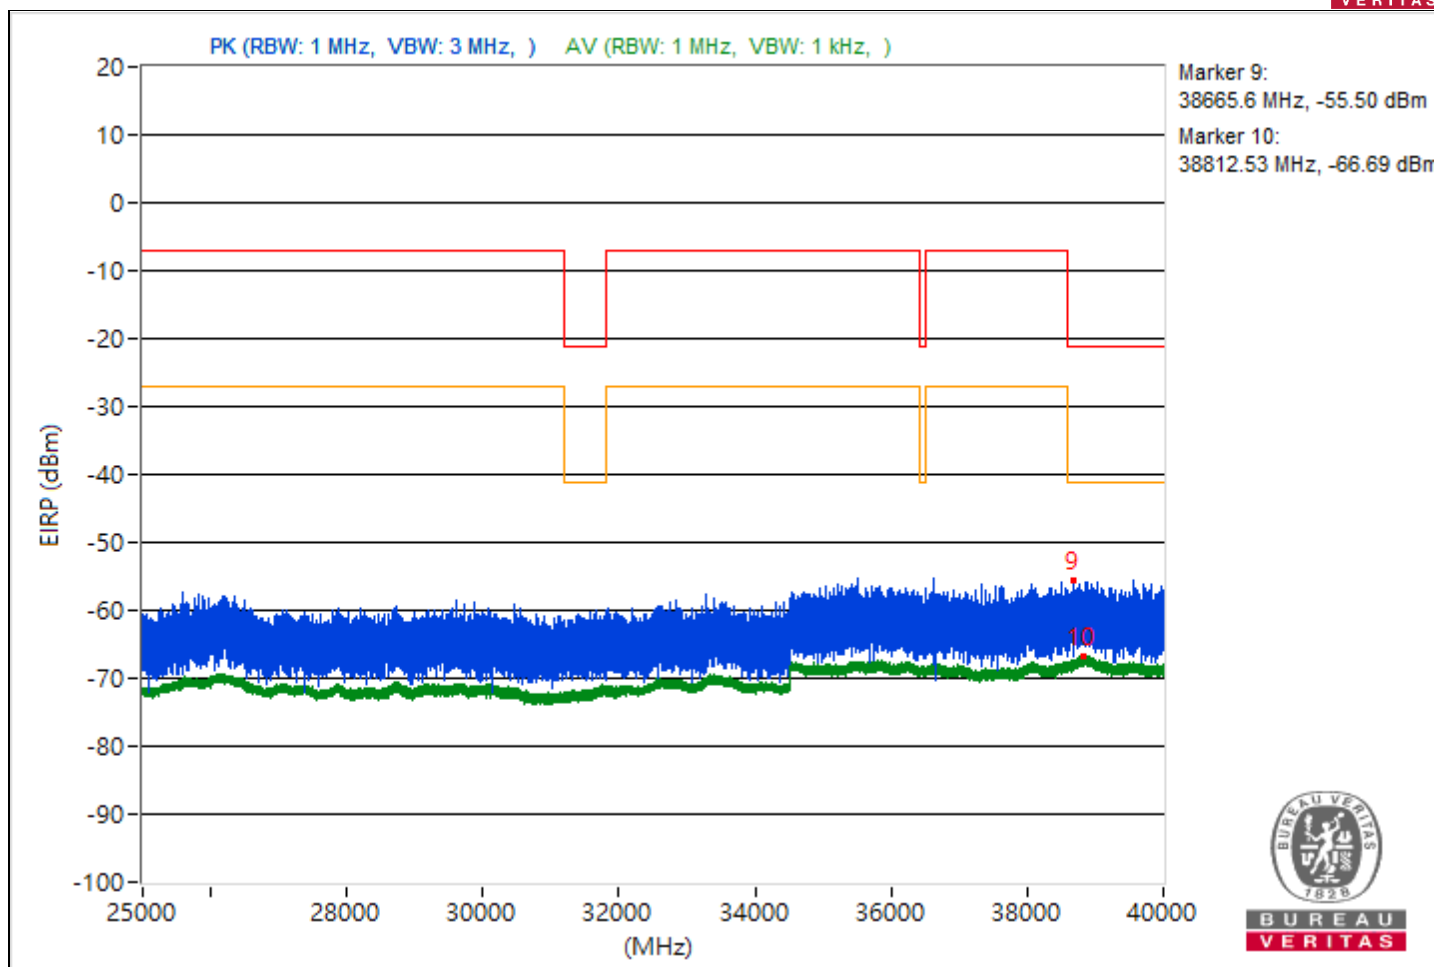





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3818.51	44.68 PK	74	-29.32	-55.5	4.92	-50.58
2	3803.89	33.08 AV	54	-20.92	-67.1	4.92	-62.18
3	7252.32	45.8 PK	74	-28.2	-54.38	4.92	-49.46
4	7260.26	34.77 AV	54	-19.23	-65.41	4.92	-60.49
5	21299.9	46.03 PK	74	-27.97	-54.15	4.92	-49.23
6	20825.8	35.14 AV	54	-18.86	-65.04	4.92	-60.12
7	22430	46.77 PK	74	-27.23	-53.41	4.92	-48.49
8	23677.7	35.6 AV	54	-18.4	-64.58	4.92	-59.66
9	39119.64	40.41 PK	74	-33.59	-59.77	4.92	-54.85
10	38820.36	28.53 AV	54	-25.47	-71.65	4.92	-66.73

Note: Margin value = Emission Level - Limit value

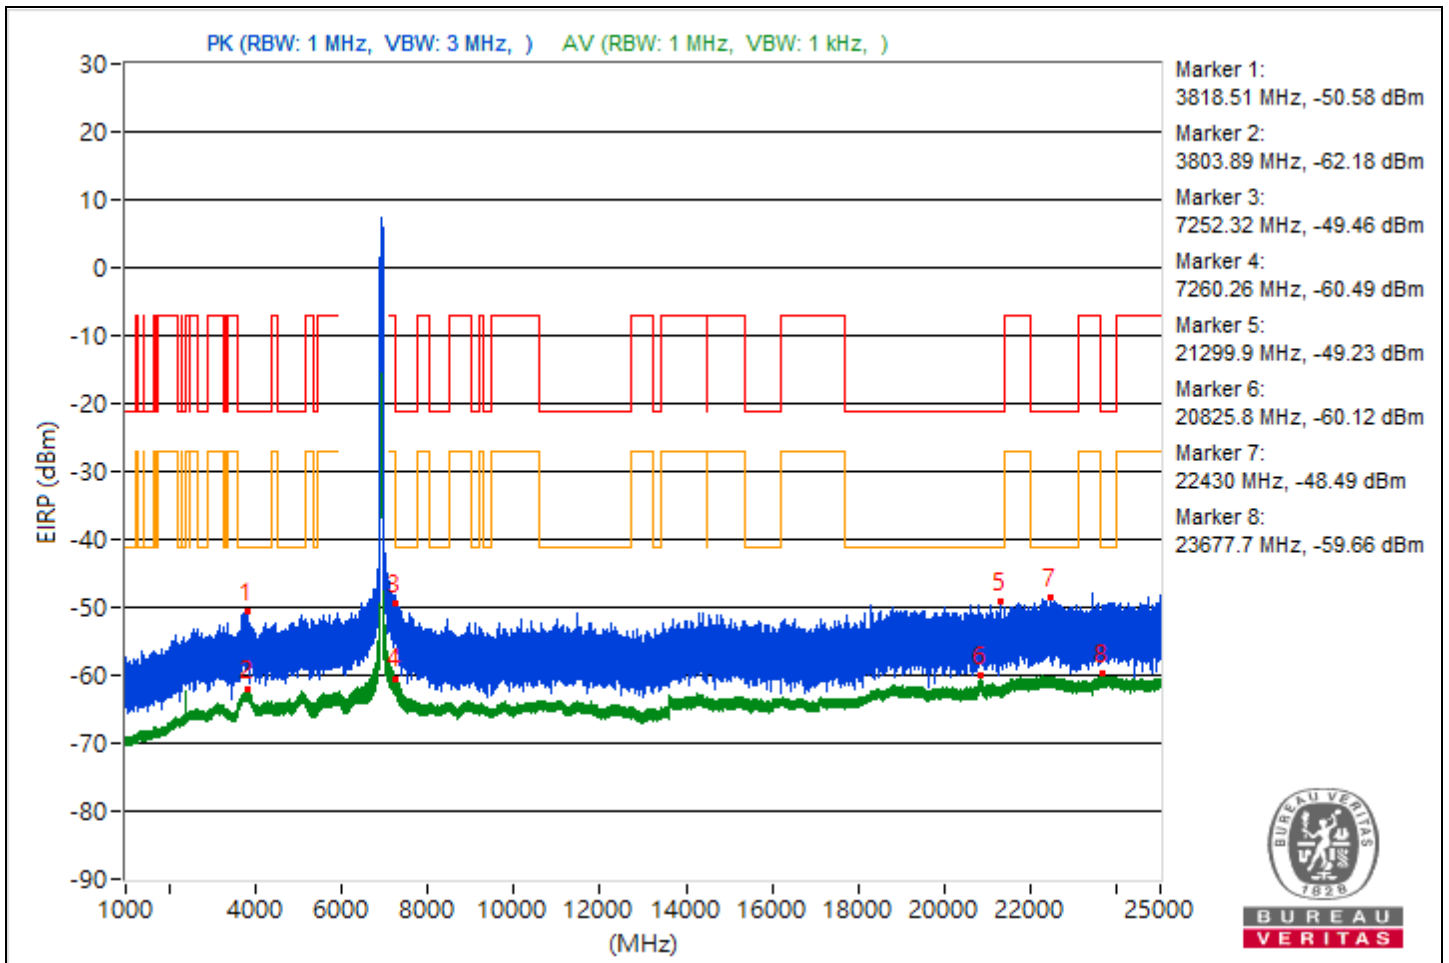


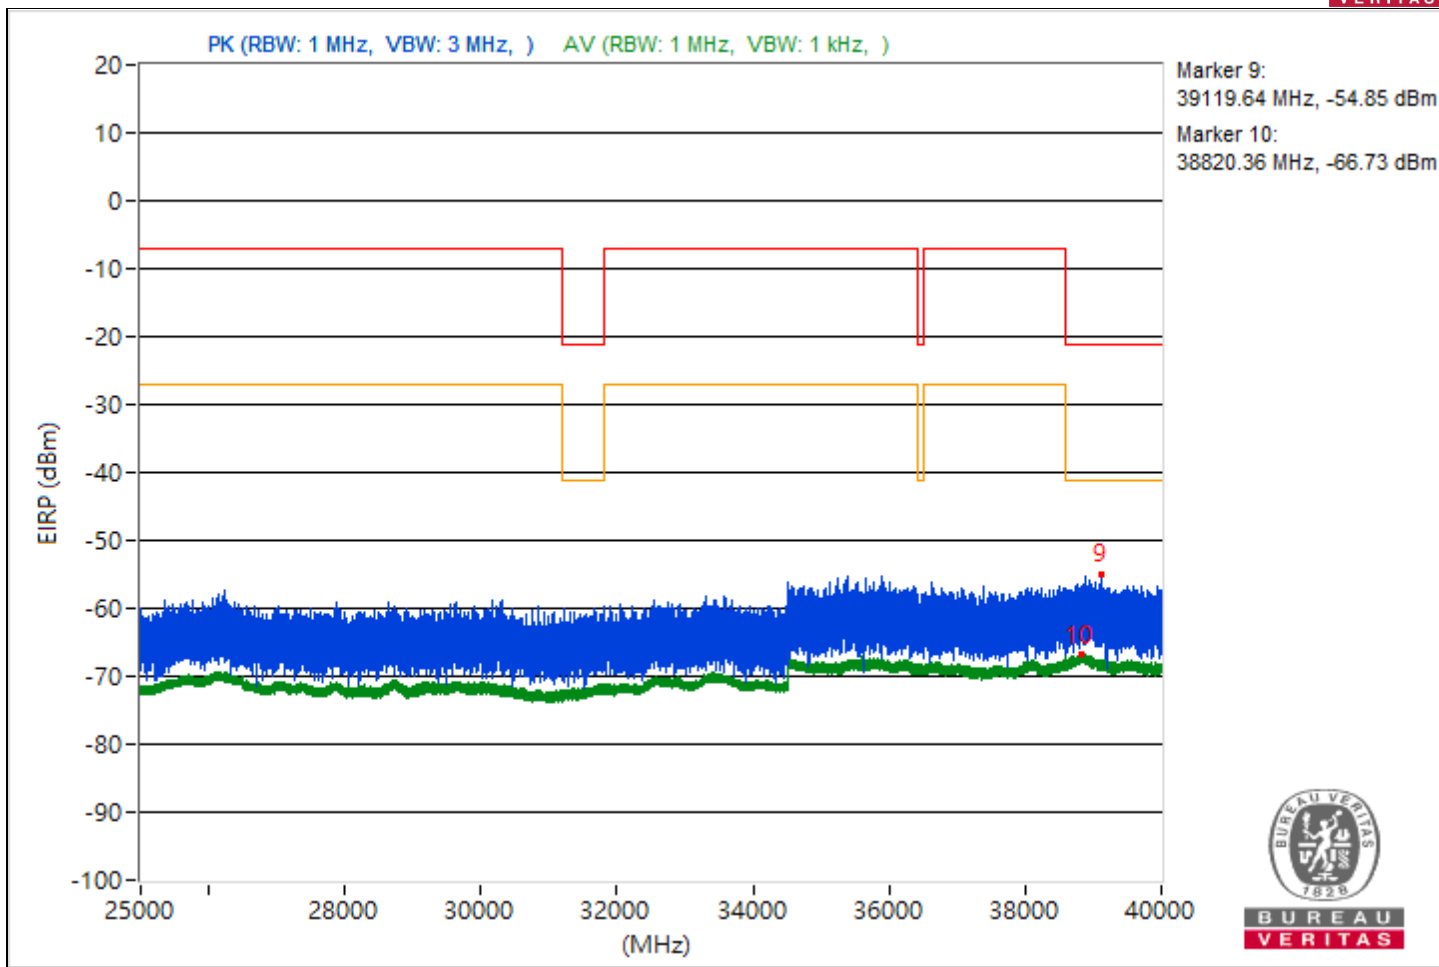


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.5	45.06 PK	74	-28.94	-55.12	4.92	-50.2
2	3814.47	32.93 AV	54	-21.07	-67.25	4.92	-62.33
3	7294.87	47.73 PK	74	-26.27	-52.45	4.92	-47.53
4	7257.53	36.93 AV	54	-17.07	-63.25	4.92	-58.33
5	20050.6	46.01 PK	74	-27.99	-54.17	4.92	-49.25
6	20837.7	33.97 AV	54	-20.03	-66.21	4.92	-61.29
7	22098	46.92 PK	74	-27.08	-53.26	4.92	-48.34
8	23874.3	35.11 AV	54	-18.89	-65.07	4.92	-60.15
9	38947.56	40.54 PK	74	-33.46	-59.64	4.92	-54.72
10	38839.02	28.56 AV	54	-25.44	-71.62	4.92	-66.7

Note: Margin value = Emission Level - Limit value

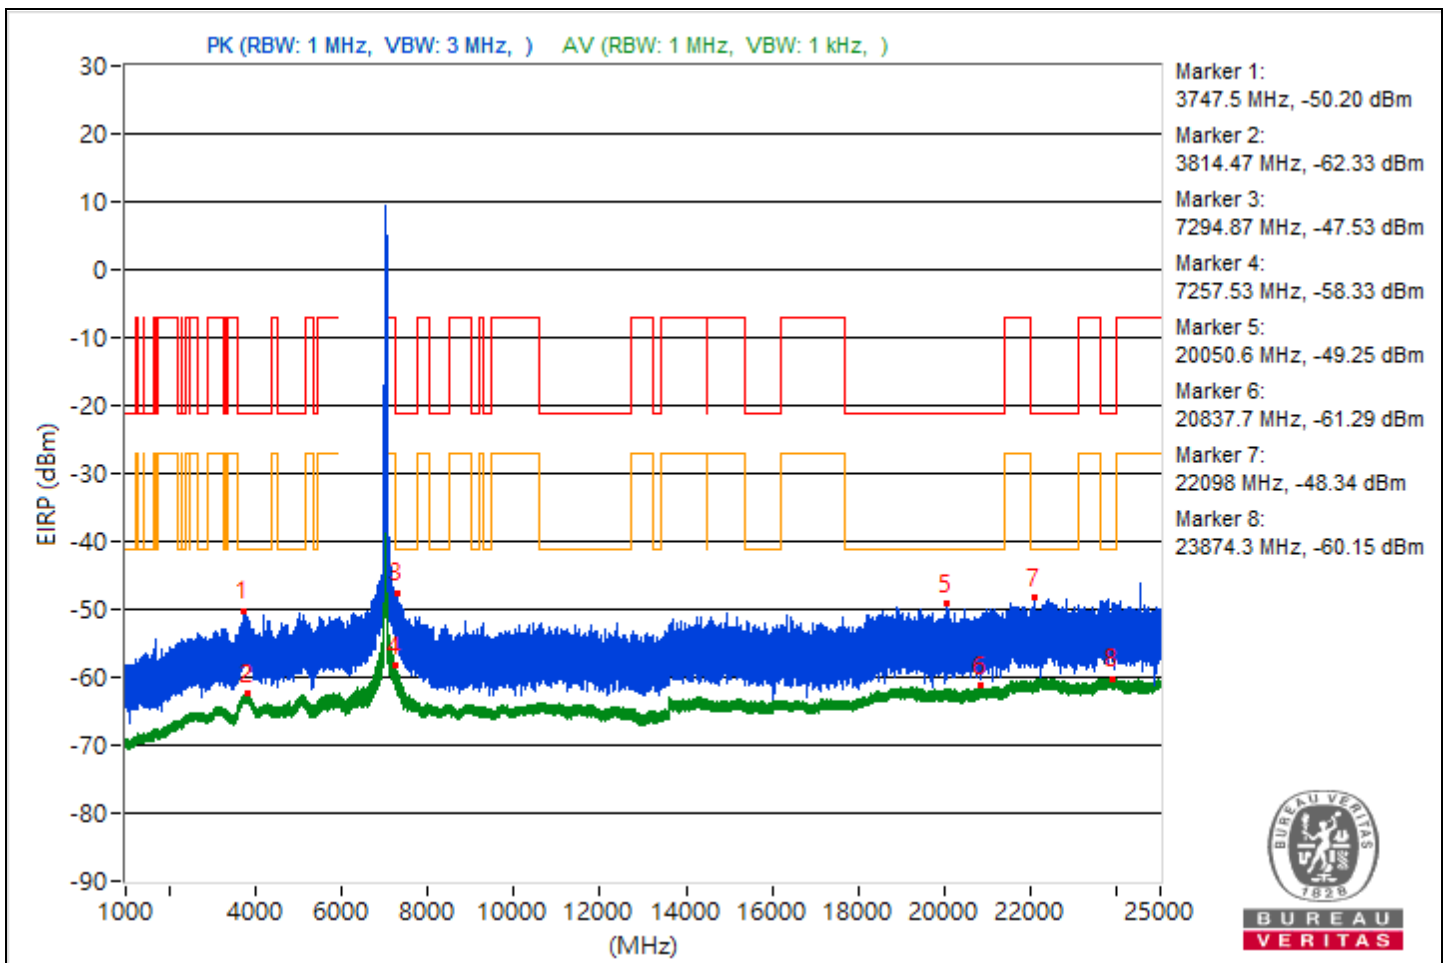


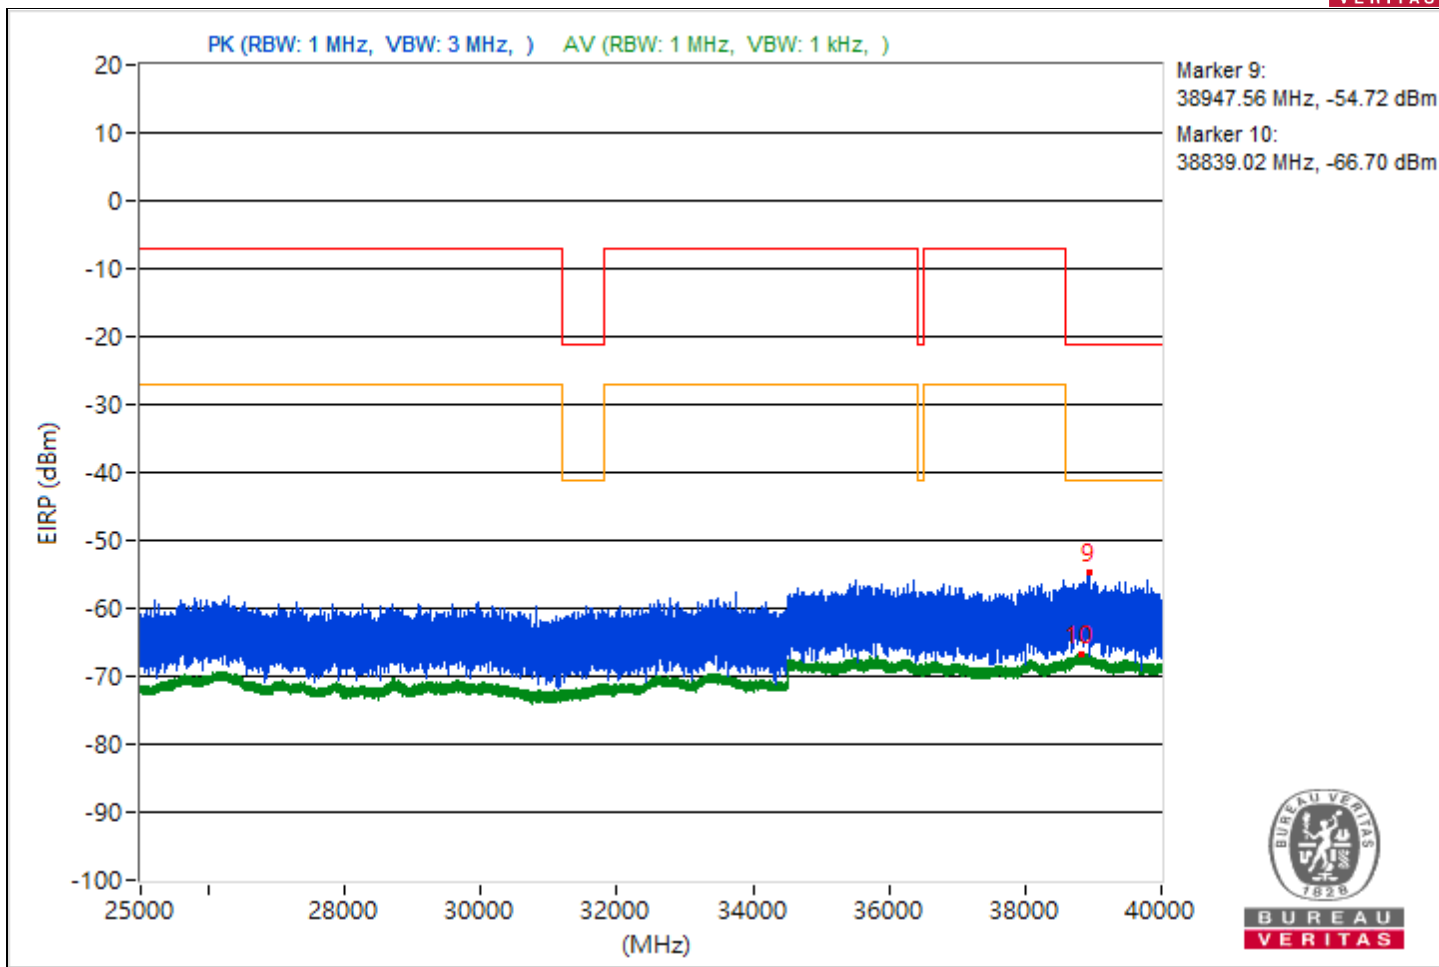


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5451.77	46.68 PK	74	-27.32	-53.5	4.92	-48.58
2	5458.61	35.17 AV	54	-18.83	-65.01	4.92	-60.09
3	8033.6	49.92 PK	74	-24.08	-50.26	4.92	-45.34
4	8033.33	48.13 AV	54	-5.87	-52.05	4.92	-47.13
5	19049.5	45.28 PK	74	-28.72	-54.9	4.92	-49.98
6	20830.6	33.86 AV	54	-20.14	-66.32	4.92	-61.4
7	22336.6	47.21 PK	74	-26.79	-52.97	4.92	-48.05
8	23777.3	35.22 AV	54	-18.78	-64.96	4.92	-60.04
9	38787.64	40.55 PK	74	-33.45	-59.63	4.92	-54.71
10	38833.69	28.46 AV	54	-25.54	-71.72	4.92	-66.8

Note: Margin value = Emission Level - Limit value

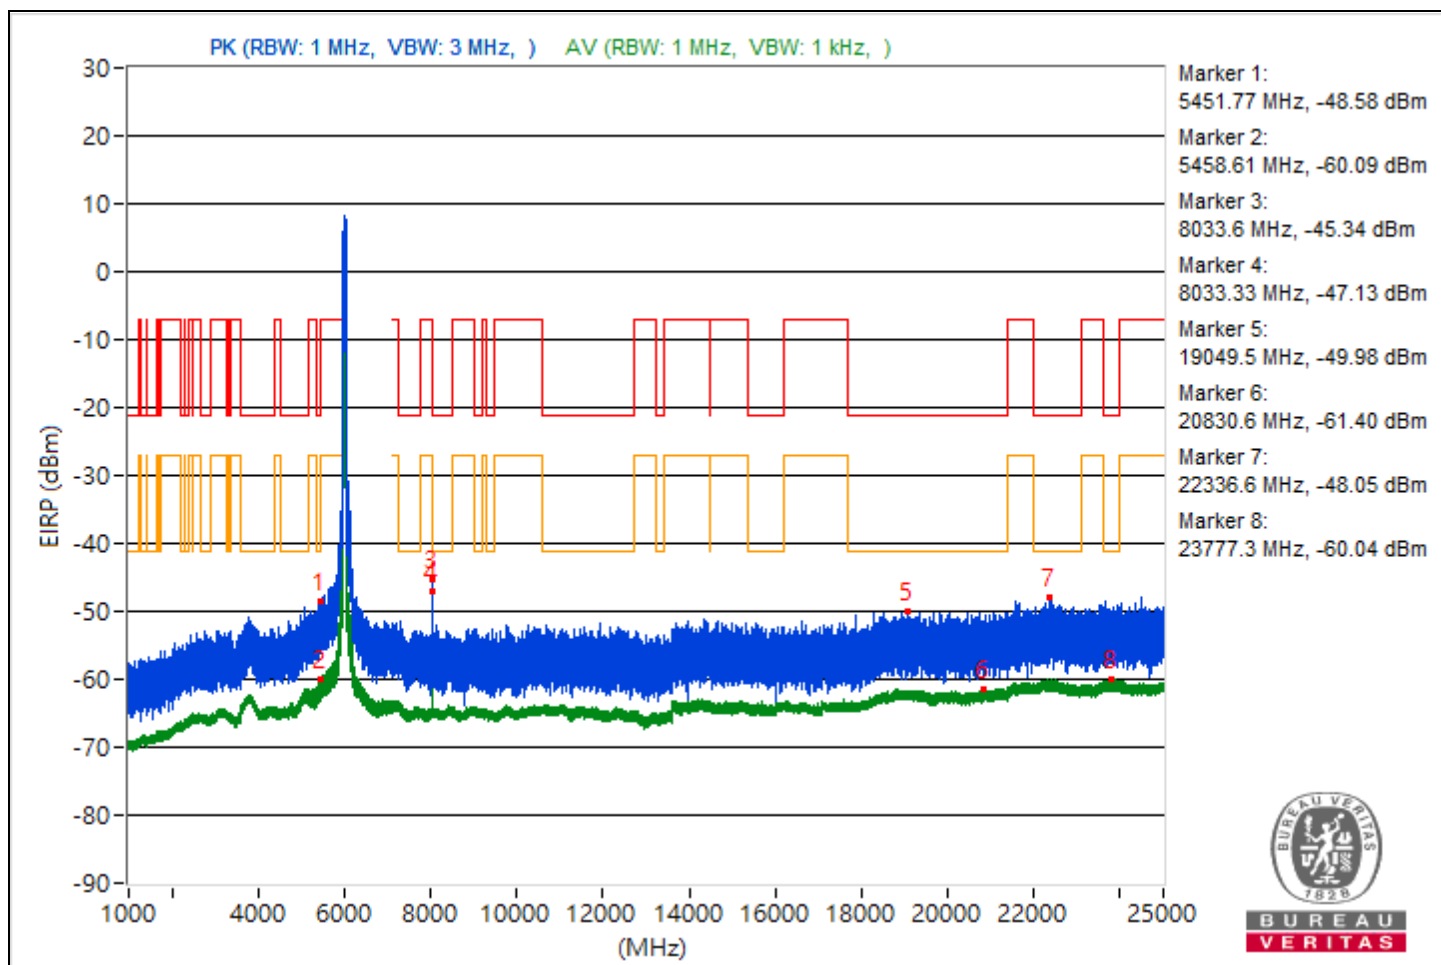

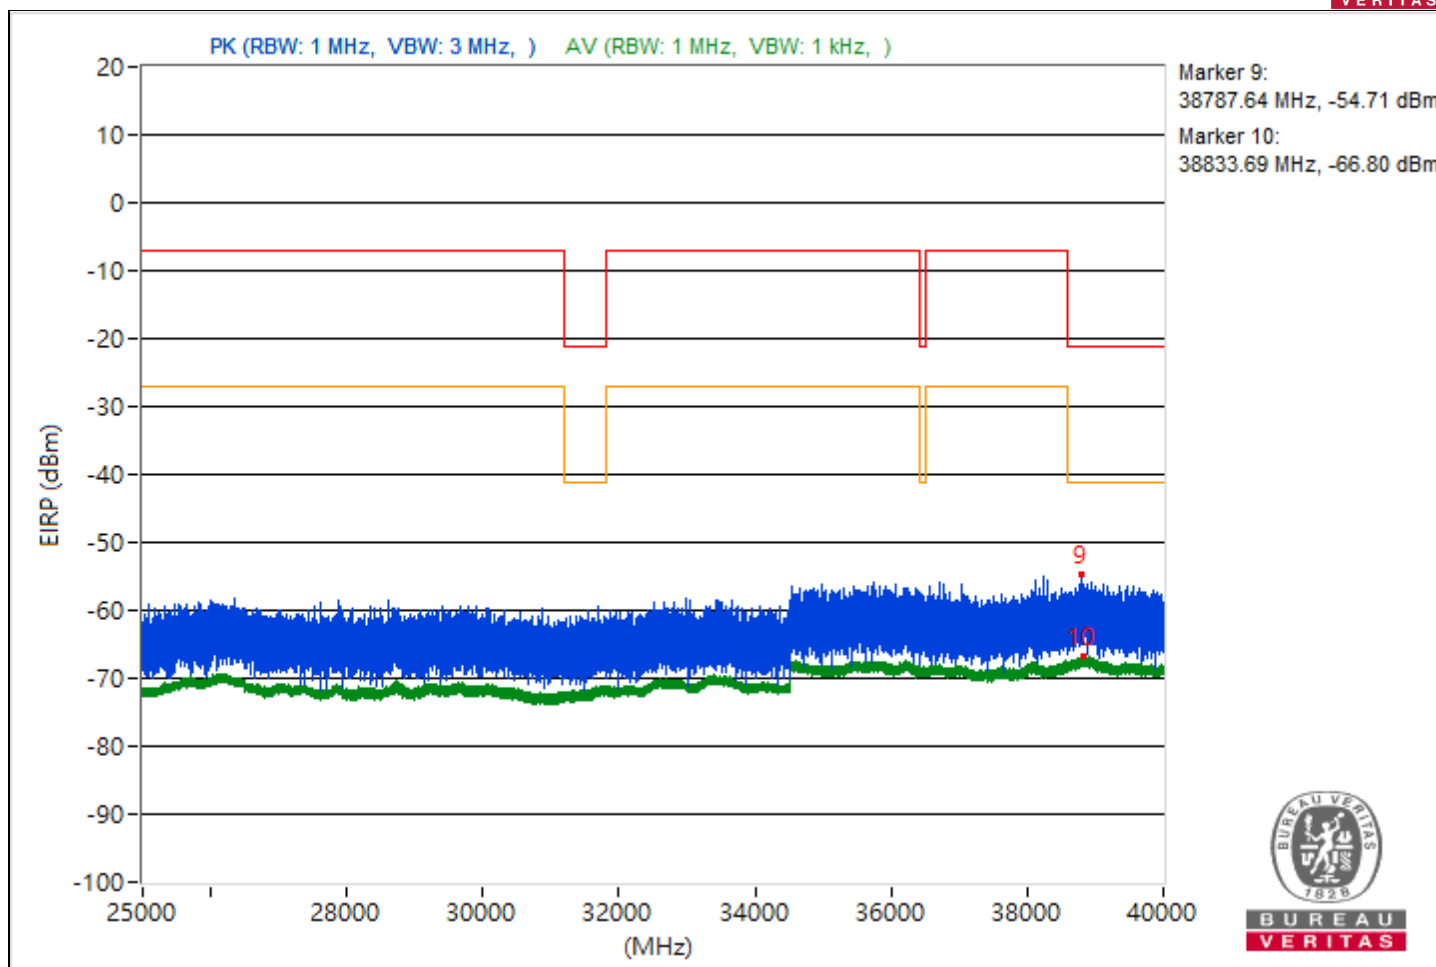





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5441.19	45.36 PK	74	-28.64	-54.82	4.92	-49.9
2	5440.57	33.27 AV	54	-20.73	-66.91	4.92	-61.99
3	8460	47.81 PK	74	-26.19	-52.37	4.92	-47.45
4	8459.91	45.71 AV	54	-8.29	-54.47	4.92	-49.55
5	18579.8	46.81 PK	74	-27.19	-53.37	4.92	-48.45
6	21119.5	34.03 AV	54	-19.97	-66.15	4.92	-61.23
7	22340.1	46.95 PK	74	-27.05	-53.23	4.92	-48.31
8	22386.1	35.34 AV	54	-18.66	-64.84	4.92	-59.92
9	39443.2	40.55 PK	74	-33.45	-59.63	4.92	-54.71
10	38868	28.55 AV	54	-25.45	-71.63	4.92	-66.71

Note: Margin value = Emission Level - Limit value

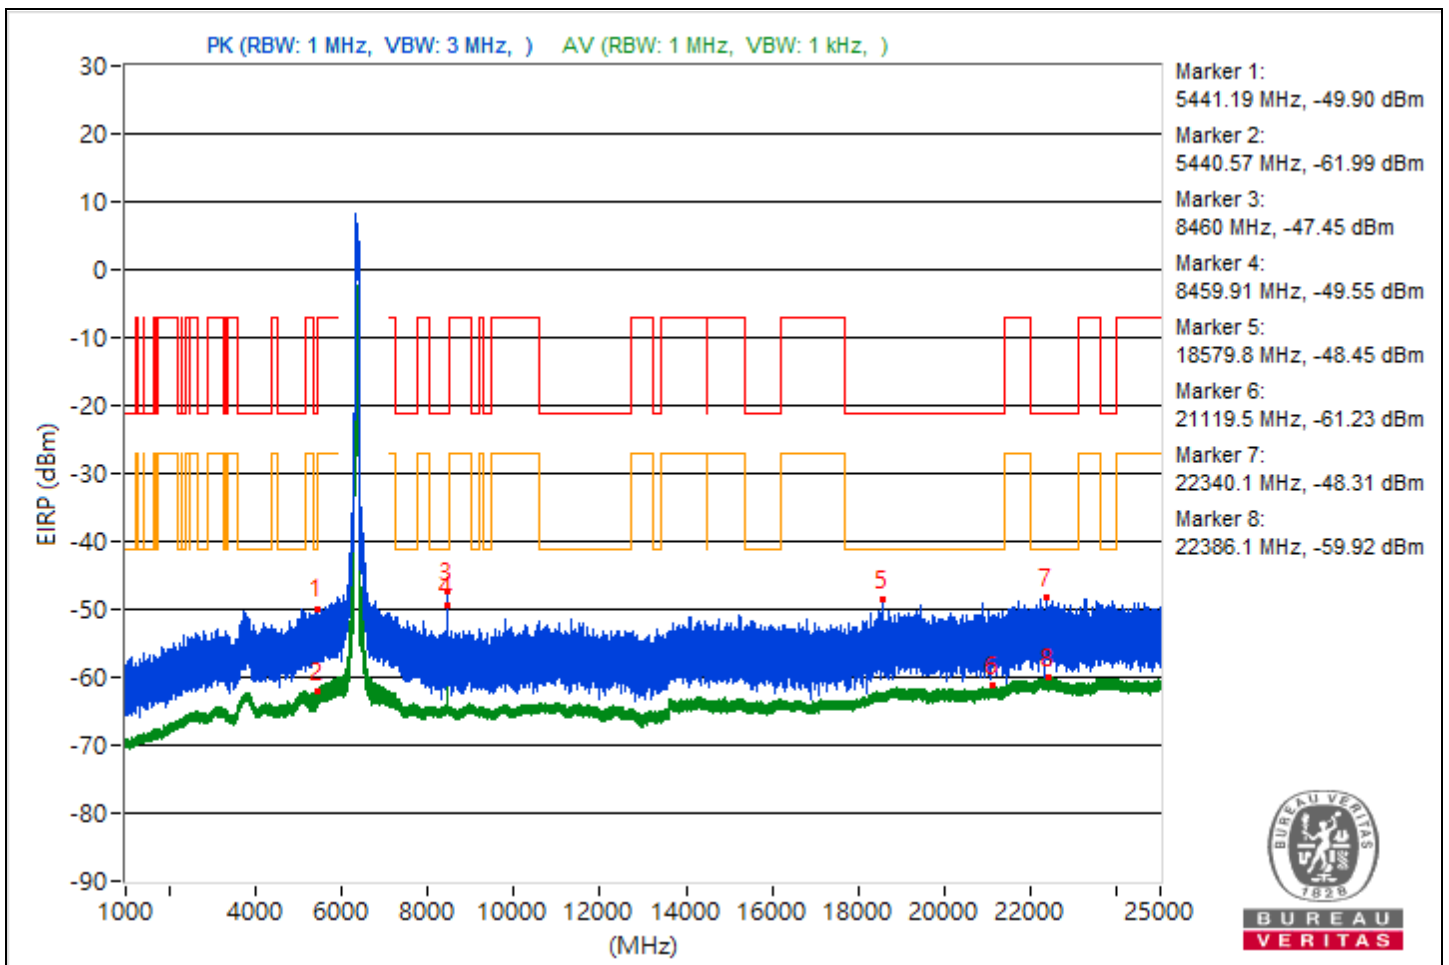

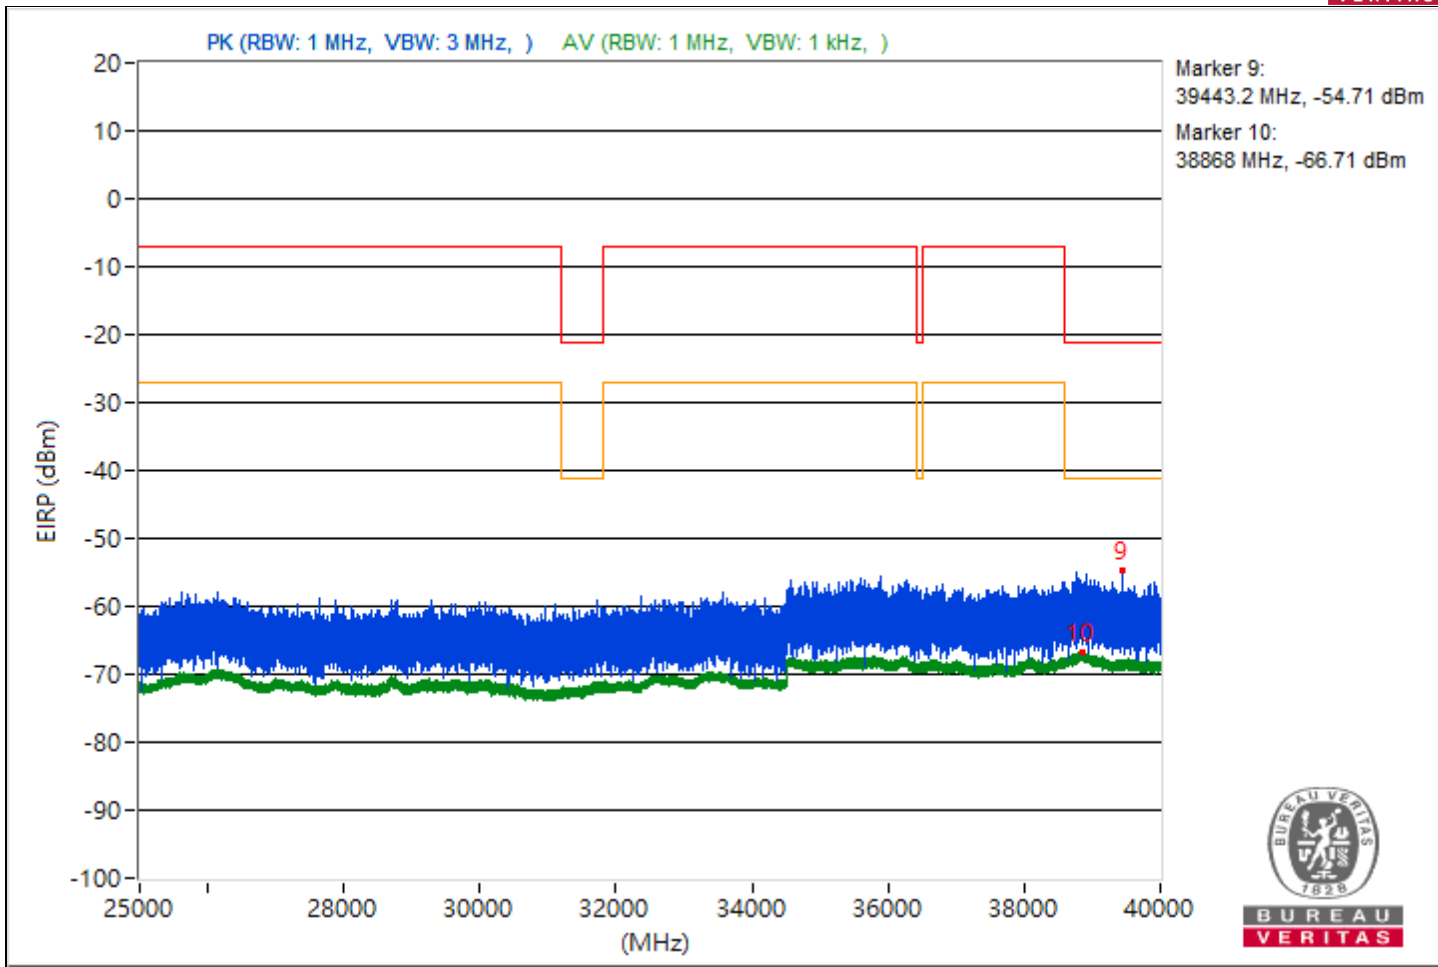




BUREAU VERITAS


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3870.86	44.71 PK	74	-29.29	-55.47	4.92	-50.55
2	5116.54	33.15 AV	54	-20.85	-67.03	4.92	-62.11
3	7252.01	43.82 PK	74	-30.18	-56.36	4.92	-51.44
4	7251.62	32.7 AV	54	-21.3	-67.48	4.92	-62.56
5	21081.2	46.39 PK	74	-27.61	-53.79	4.92	-48.87
6	21072.2	33.84 AV	54	-20.16	-66.34	4.92	-61.42
7	22233.6	46.89 PK	74	-27.11	-53.29	4.92	-48.37
8	23673.7	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38681.42	40.13 PK	74	-33.87	-60.05	4.92	-55.13
10	38823.82	28.73 AV	54	-25.27	-71.45	4.92	-66.53

Note: Margin value = Emission Level - Limit value

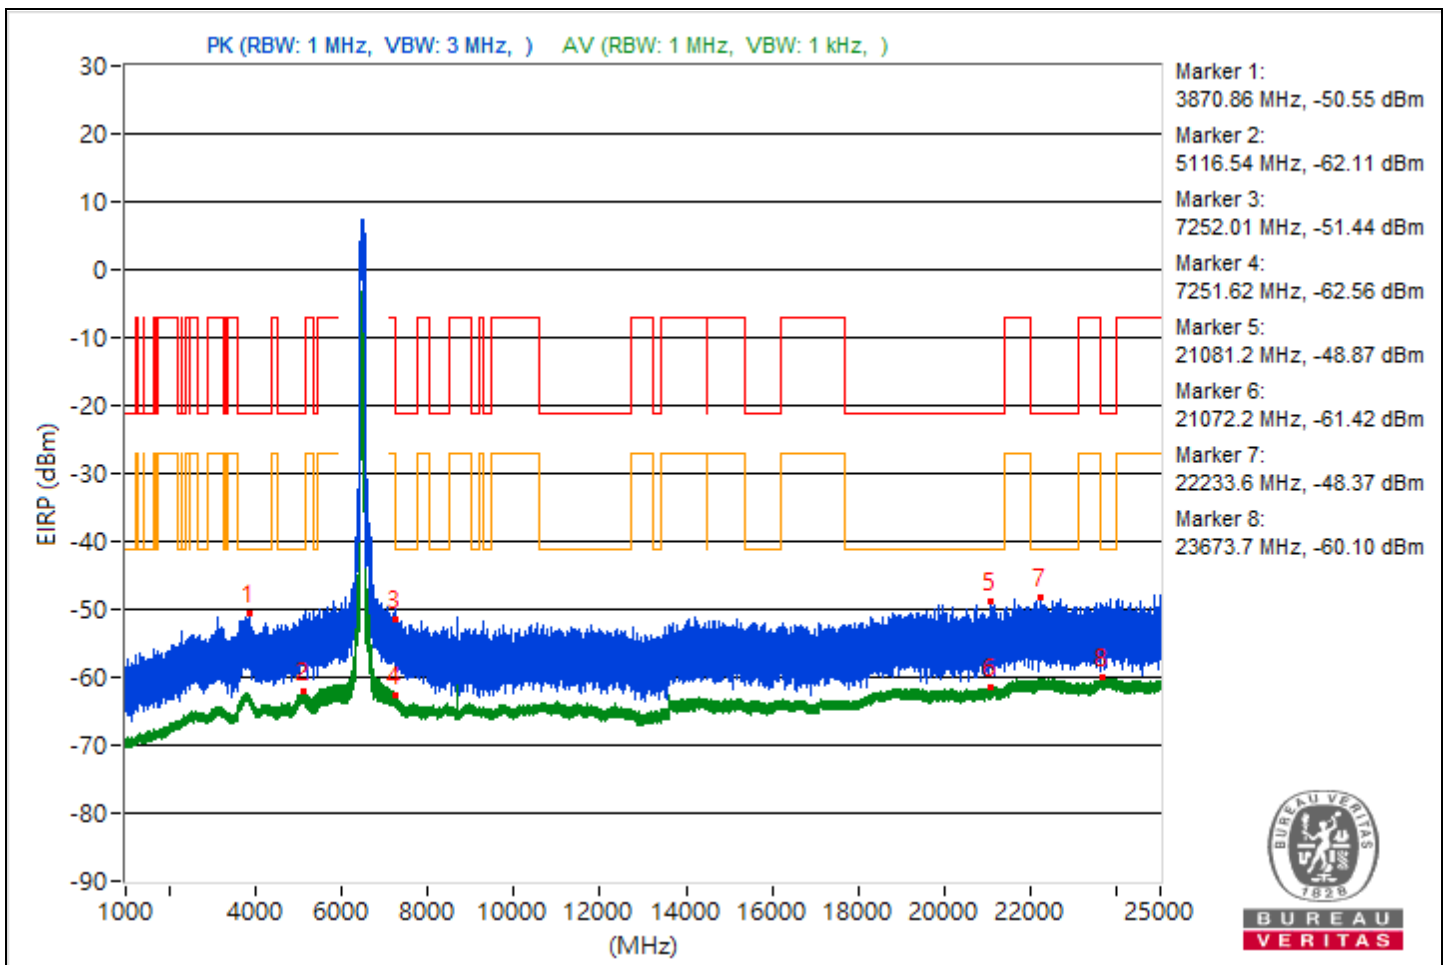


BUREAU VERITAS

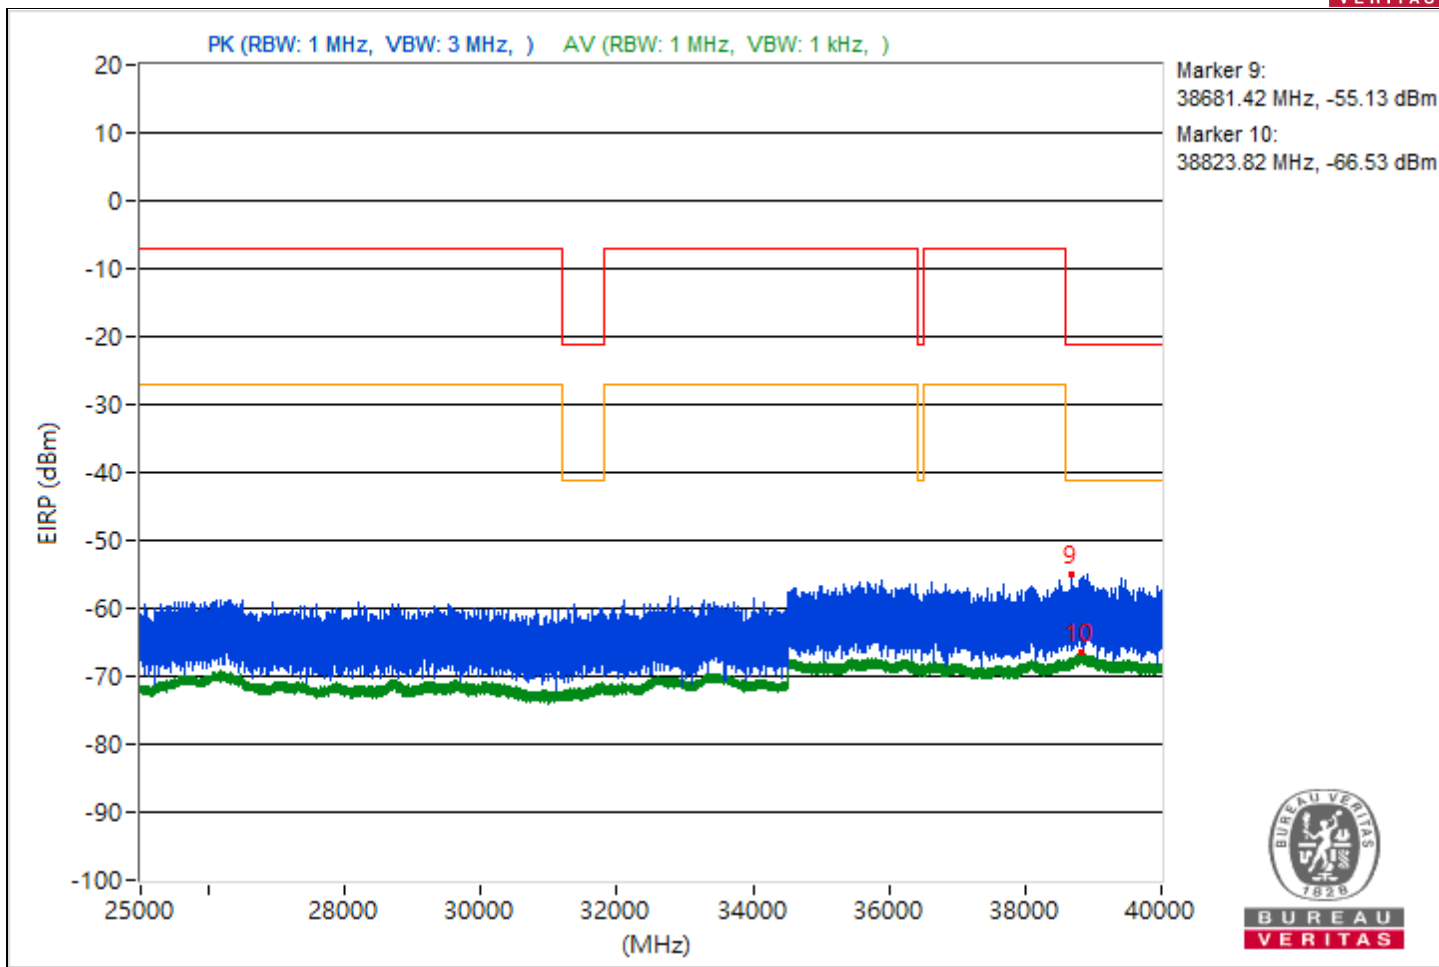


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5064.59	45.38 PK	74	-28.62	-54.8	4.92	-49.88
2	3772.23	32.89 AV	54	-21.11	-67.29	4.92	-62.37
3	12286.22	43.69 PK	74	-30.31	-56.49	4.92	-51.57
4	7263.68	32.97 AV	54	-21.03	-67.21	4.92	-62.29
5	19005.4	45.6 PK	74	-28.4	-54.58	4.92	-49.66
6	21150.7	33.91 AV	54	-20.09	-66.27	4.92	-61.35
7	23631.2	47.2 PK	74	-26.8	-52.98	4.92	-48.06
8	22426	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	39446.31	40.77 PK	74	-33.23	-59.41	4.92	-54.49
10	38798.4	28.59 AV	54	-25.41	-71.59	4.92	-66.67

Note: Margin value = Emission Level - Limit value

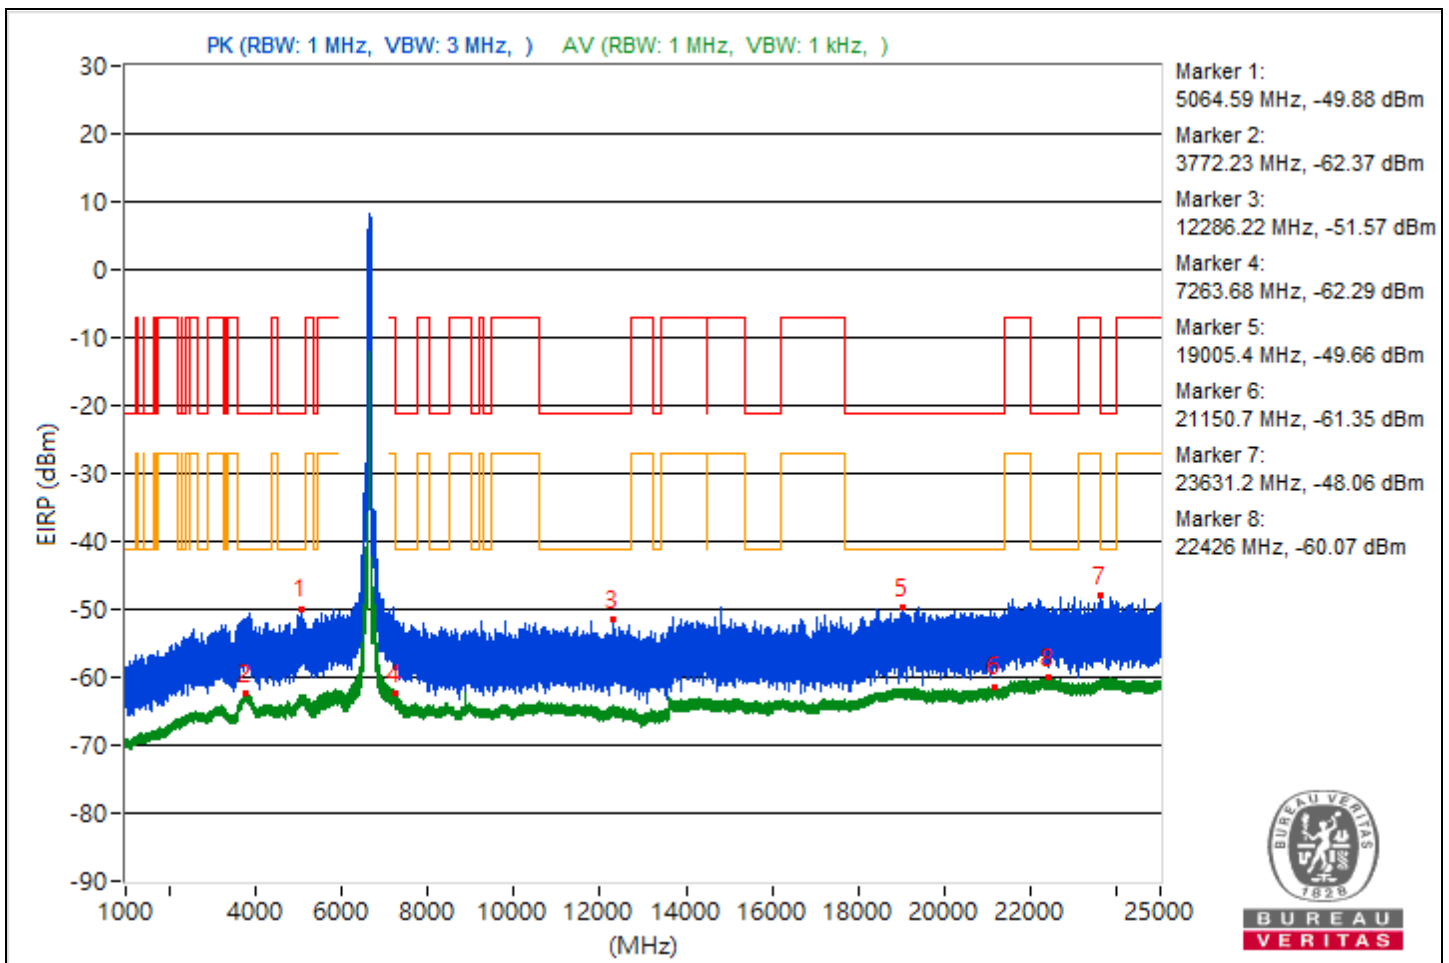


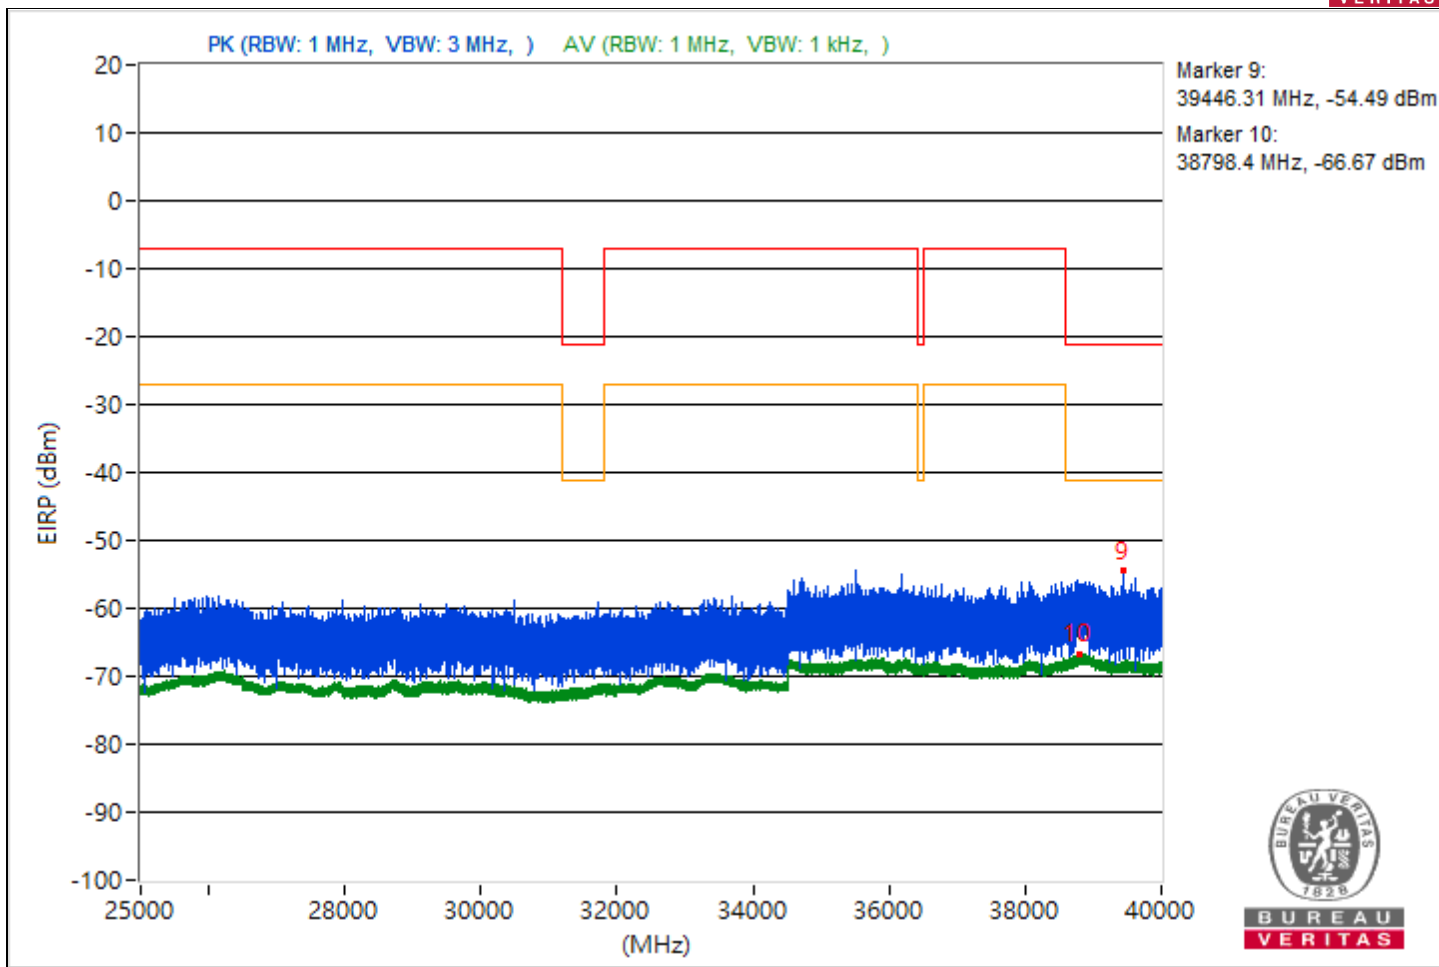


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.23	44.74 PK	74	-29.26	-55.44	4.92	-50.52
2	3792.77	33.1 AV	54	-20.9	-67.08	4.92	-62.16
3	7279.93	45.83 PK	74	-28.17	-54.35	4.92	-49.43
4	7260.8	33.82 AV	54	-20.18	-66.36	4.92	-61.44
5	19899.6	46.02 PK	74	-27.98	-54.16	4.92	-49.24
6	21192.2	33.92 AV	54	-20.08	-66.26	4.92	-61.34
7	22287	47.68 PK	74	-26.32	-52.5	4.92	-47.58
8	23803.2	35.18 AV	54	-18.82	-65	4.92	-60.08
9	38817.42	40.19 PK	74	-33.81	-59.99	4.92	-55.07
10	38843.73	28.56 AV	54	-25.44	-71.62	4.92	-66.7

Note: Margin value = Emission Level - Limit value

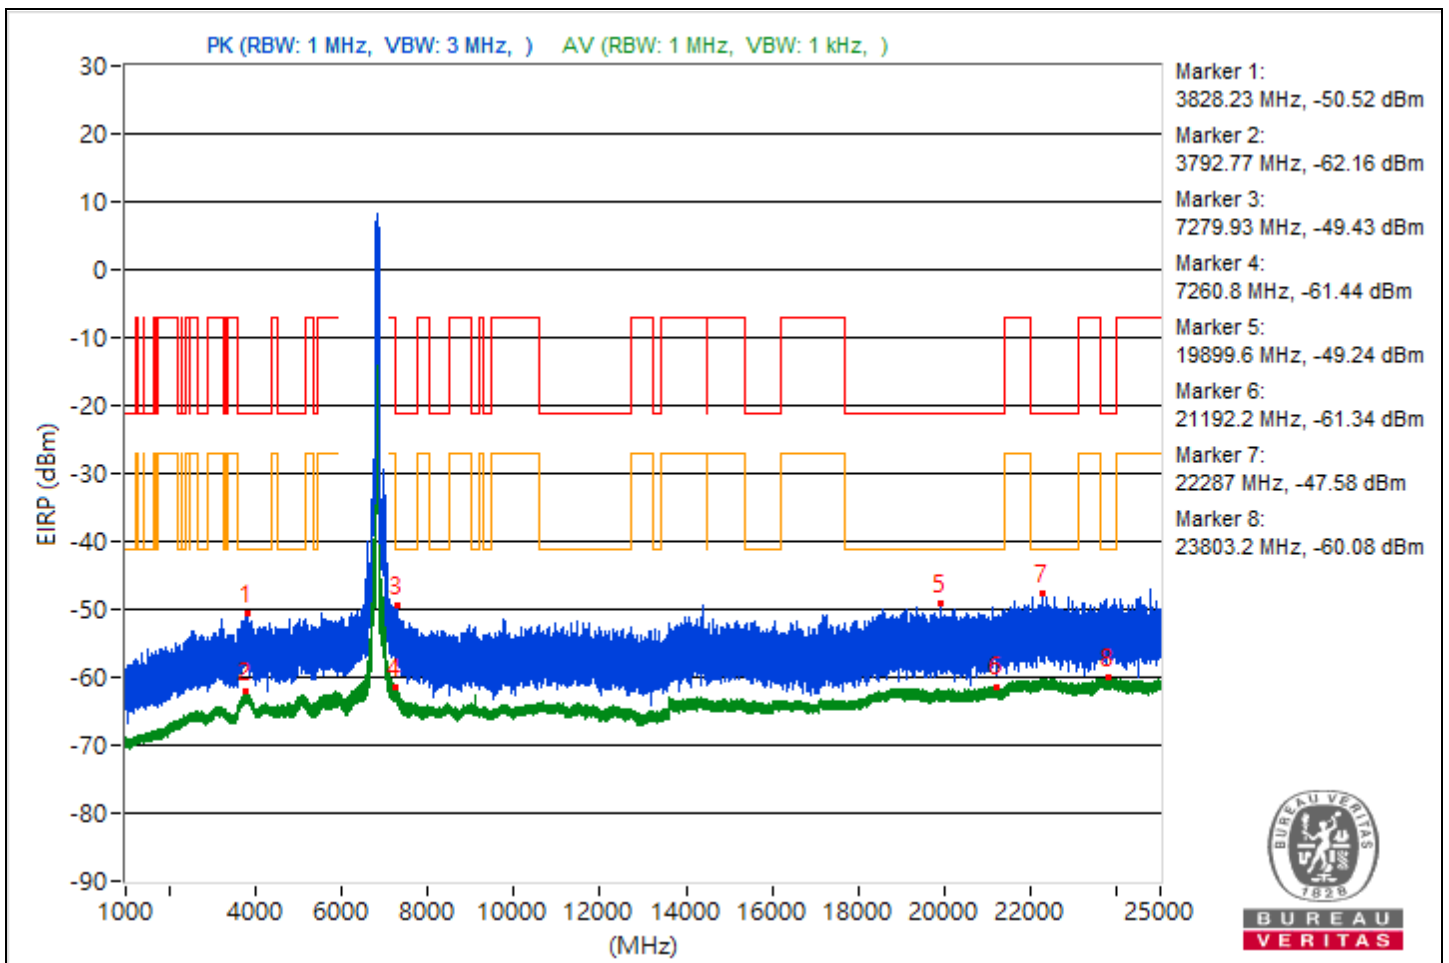

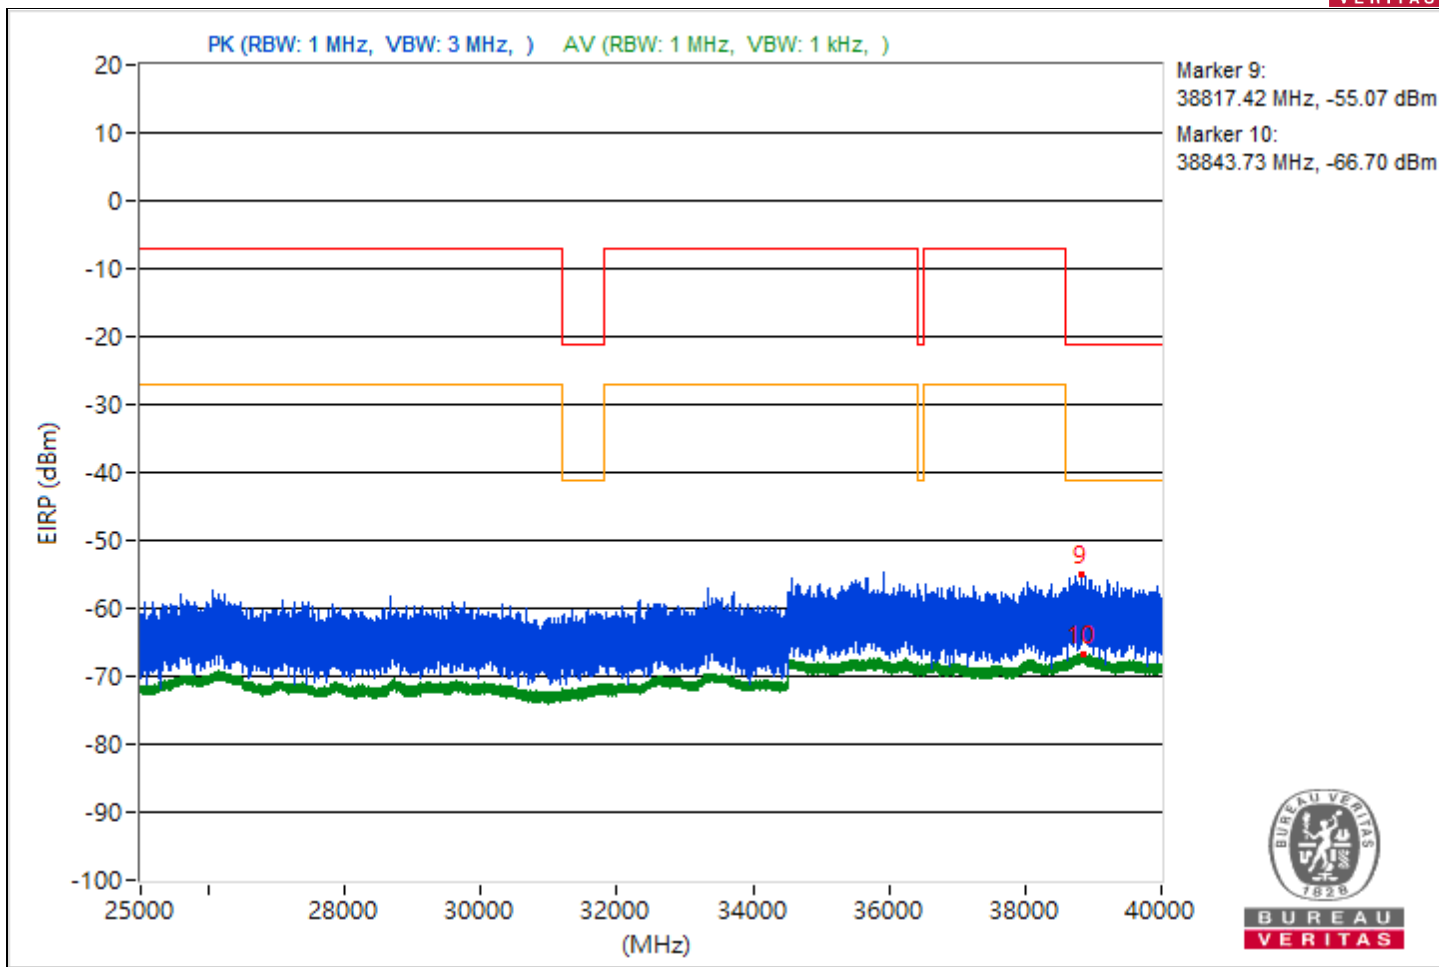





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.79	44.83 PK	74	-29.17	-55.35	4.92	-50.43
2	3806.53	32.83 AV	54	-21.17	-67.35	4.92	-62.43
3	7253.72	46.98 PK	74	-27.02	-53.2	4.92	-48.28
4	7251.31	35.29 AV	54	-18.71	-64.89	4.92	-59.97
5	19951.8	47.04 PK	74	-26.96	-53.14	4.92	-48.22
6	21186.1	33.75 AV	54	-20.25	-66.43	4.92	-61.51
7	22707.4	47.19 PK	74	-26.81	-52.99	4.92	-48.07
8	23864.3	35.51 AV	54	-18.49	-64.67	4.92	-59.75
9	38772.98	40.64 PK	74	-33.36	-59.54	4.92	-54.62
10	38859.11	28.61 AV	54	-25.39	-71.57	4.92	-66.65

Note: Margin value = Emission Level - Limit value

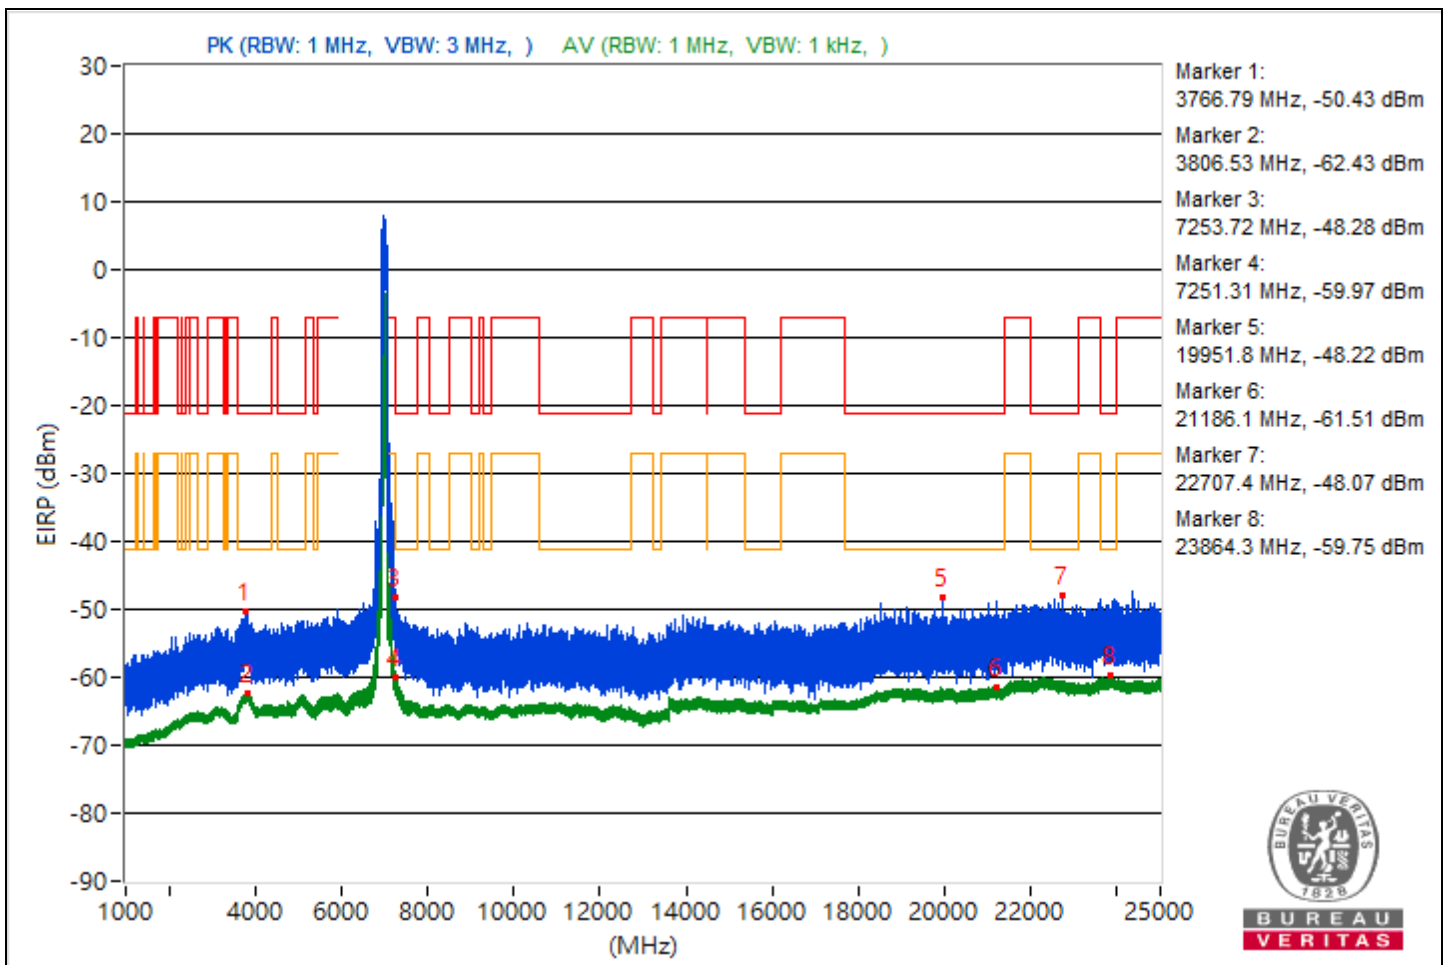


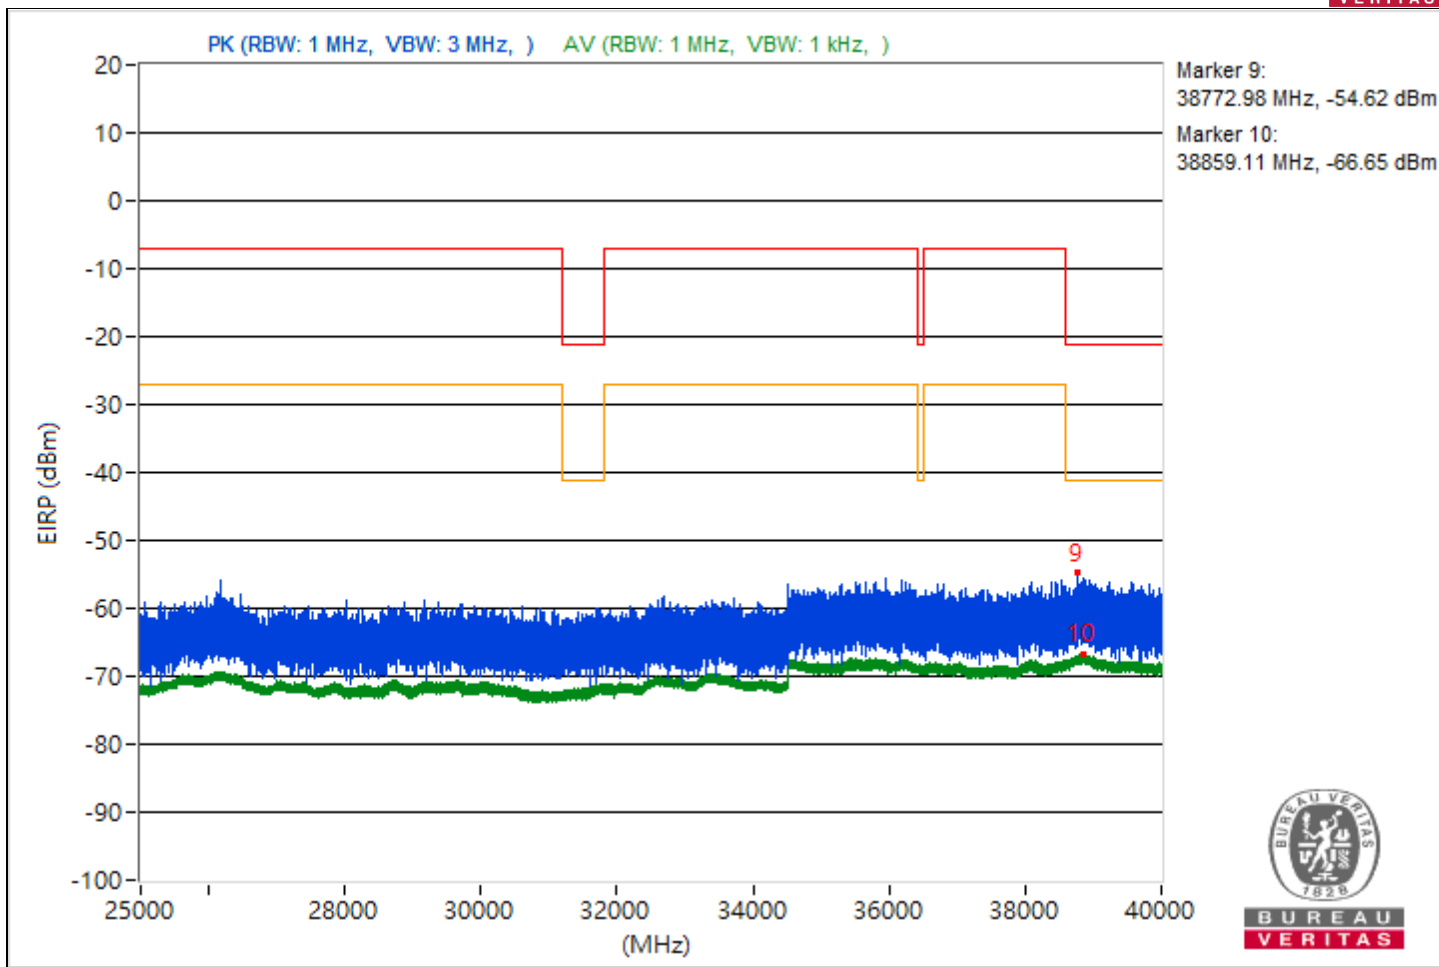


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5459.54	46.68 PK	74	-27.32	-53.5	4.92	-48.58
2	5456.12	35.23 AV	54	-18.77	-64.95	4.92	-60.03
3	8033.42	49.47 PK	74	-24.53	-50.71	4.92	-45.79
4	8033.33	48.24 AV	54	-5.76	-51.94	4.92	-47.02
5	21386.7	45.83 PK	74	-28.17	-54.35	4.92	-49.43
6	20808.4	33.88 AV	54	-20.12	-66.3	4.92	-61.38
7	22199.7	46.88 PK	74	-27.12	-53.3	4.92	-48.38
8	22307.3	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38842.04	39.97 PK	74	-34.03	-60.21	4.92	-55.29
10	38849.16	28.72 AV	54	-25.28	-71.46	4.92	-66.54

Note: Margin value = Emission Level - Limit value

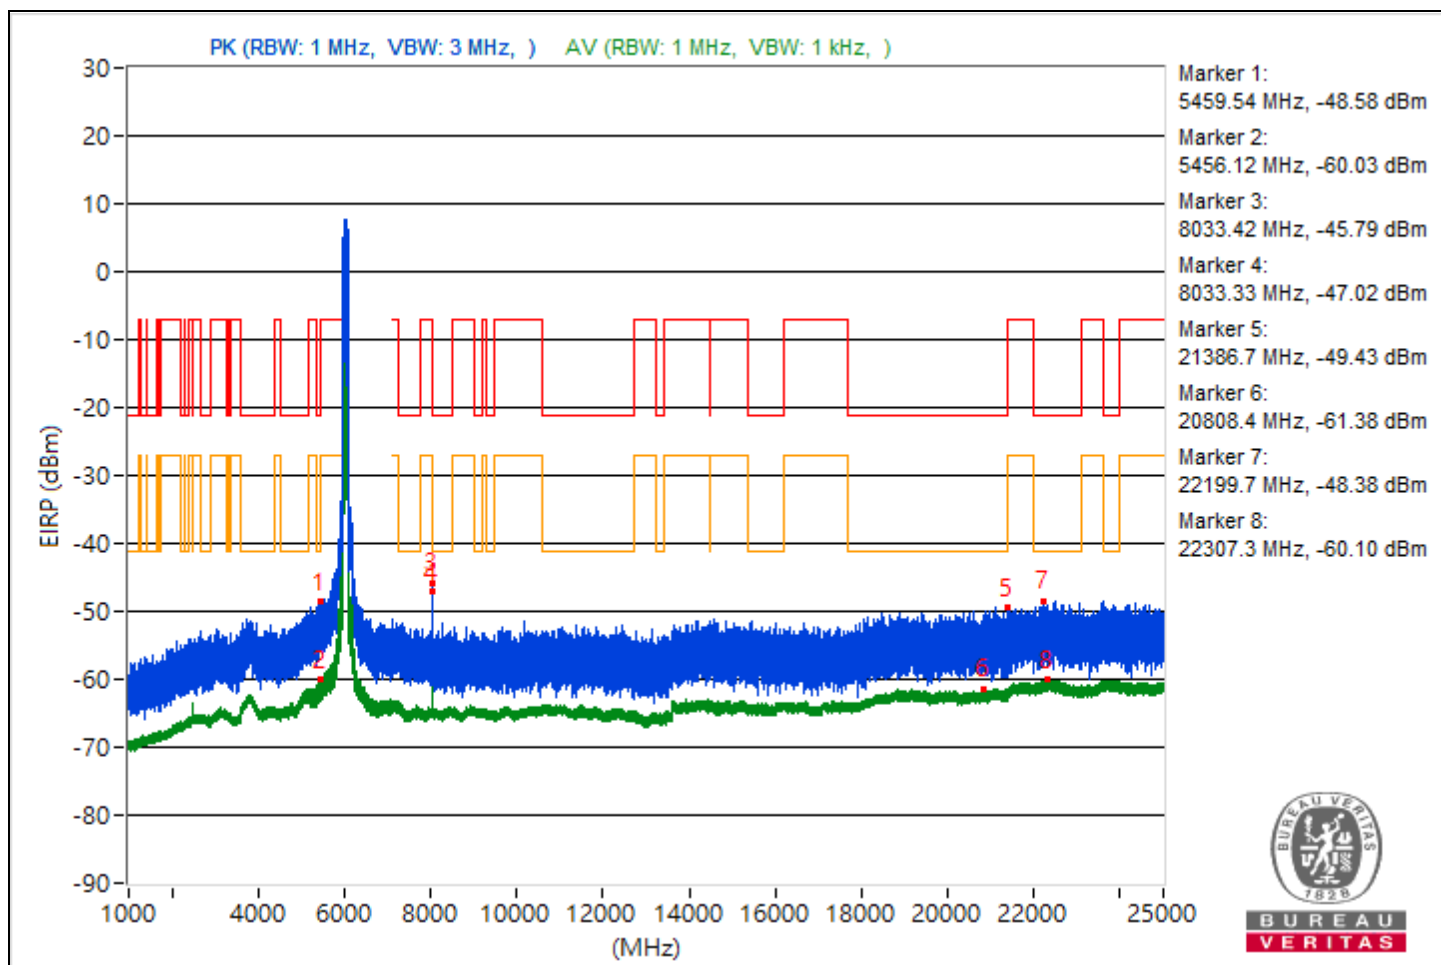


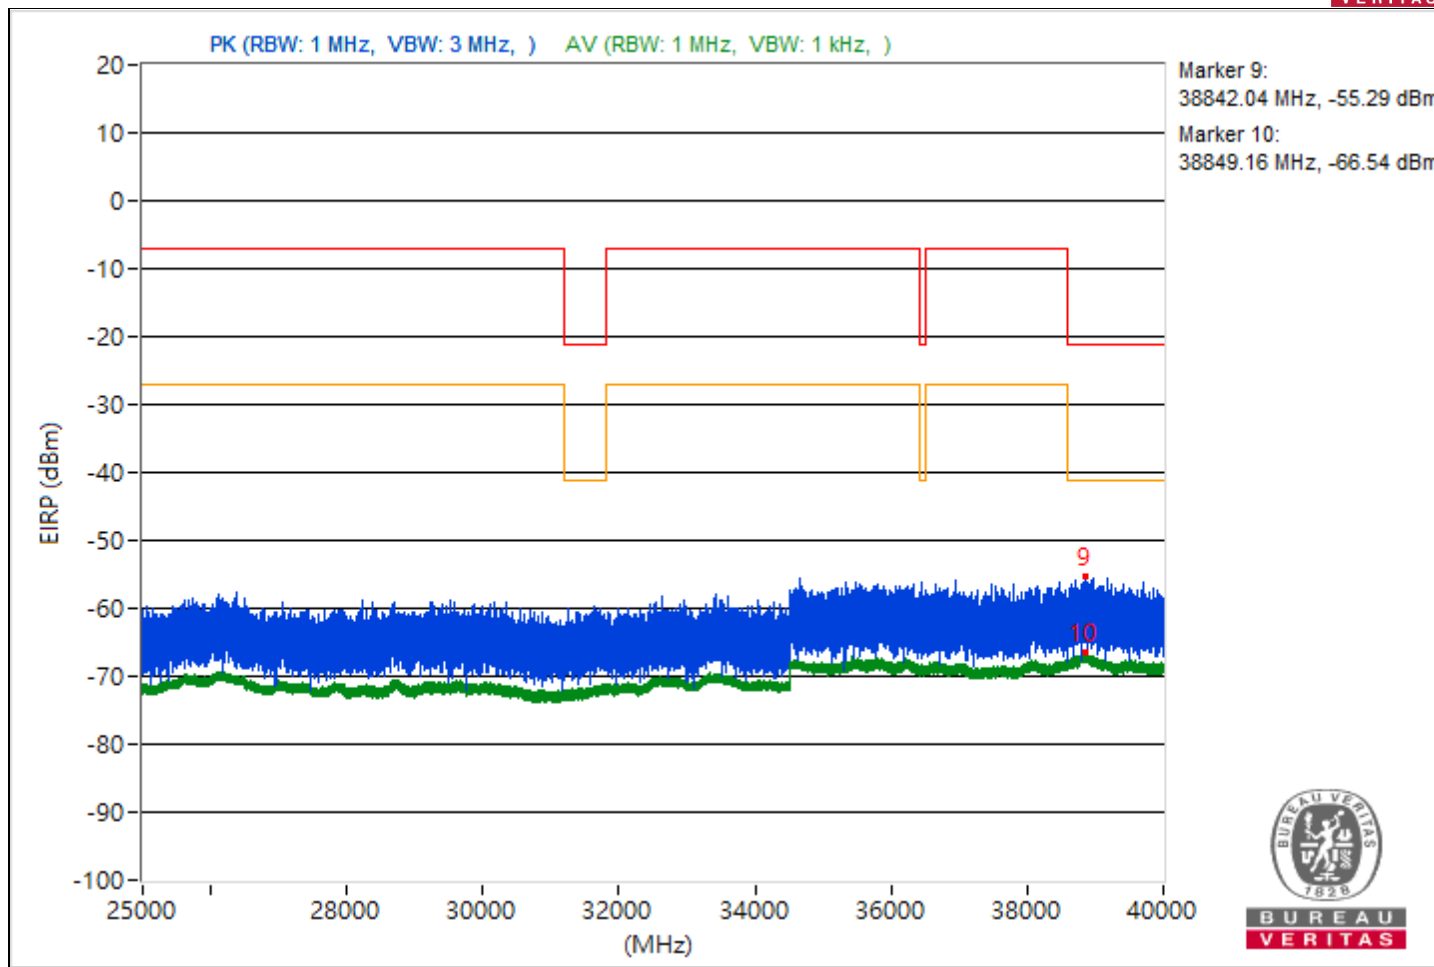


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5000.66	45.45 PK	74	-28.55	-54.73	4.92	-49.81
2	5422.76	33.46 AV	54	-20.54	-66.72	4.92	-61.8
3	8460	48.02 PK	74	-25.98	-52.16	4.92	-47.24
4	8460	45.72 AV	54	-8.28	-54.46	4.92	-49.54
5	18832	45.87 PK	74	-28.13	-54.31	4.92	-49.39
6	21397.9	34.1 AV	54	-19.9	-66.08	4.92	-61.16
7	23936.3	47.4 PK	74	-26.6	-52.78	4.92	-47.86
8	22507.9	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	38795.29	39.93 PK	74	-34.07	-60.25	4.92	-55.33
10	38849.42	28.89 AV	54	-25.11	-71.29	4.92	-66.37

Note: Margin value = Emission Level - Limit value

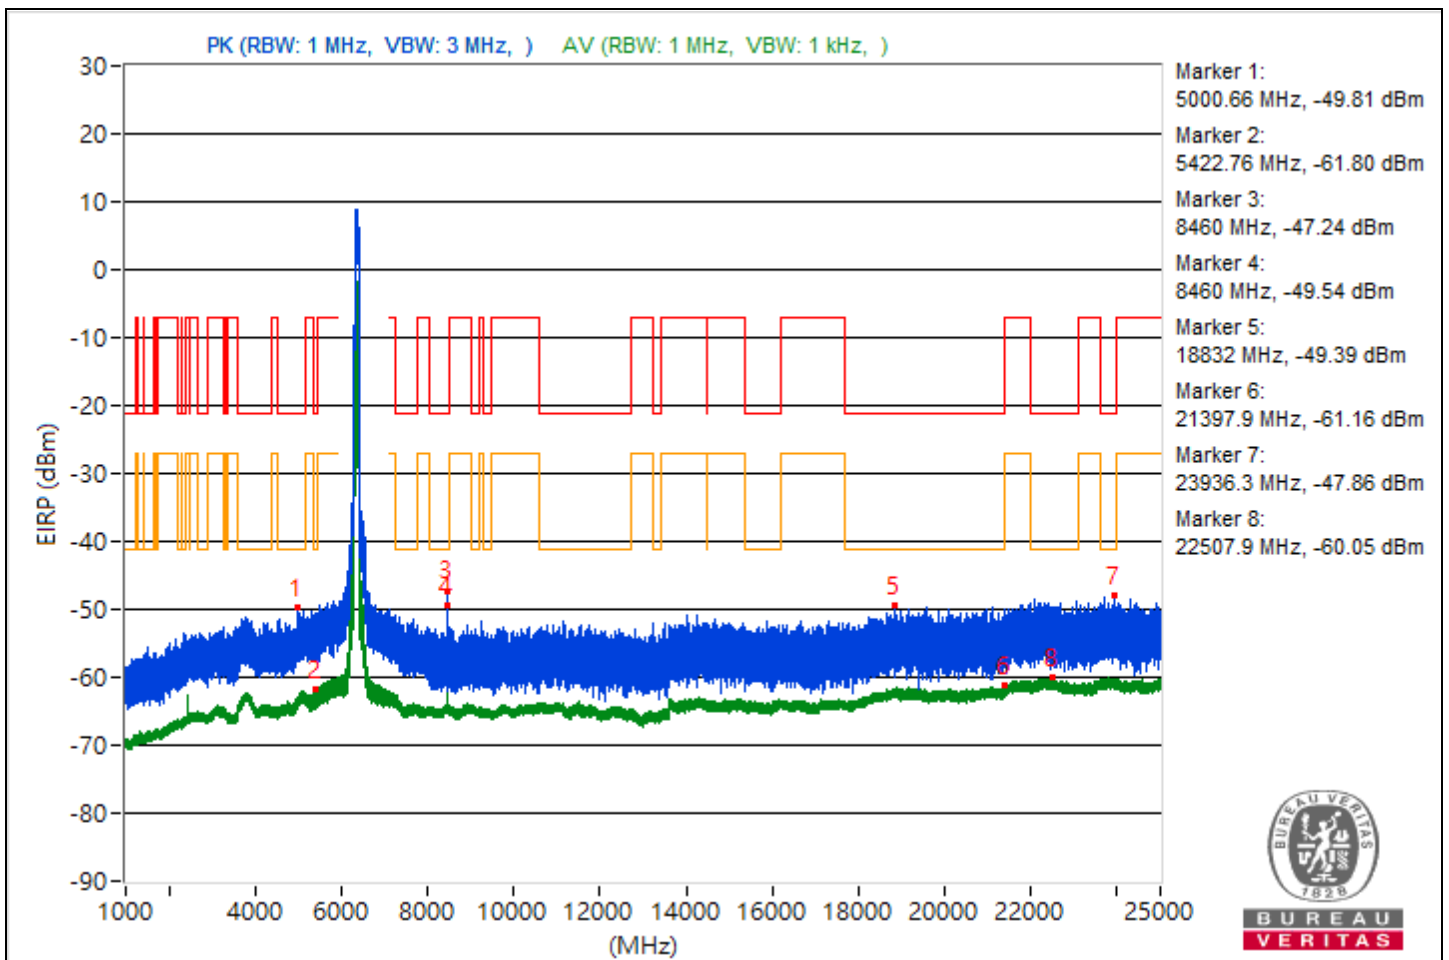


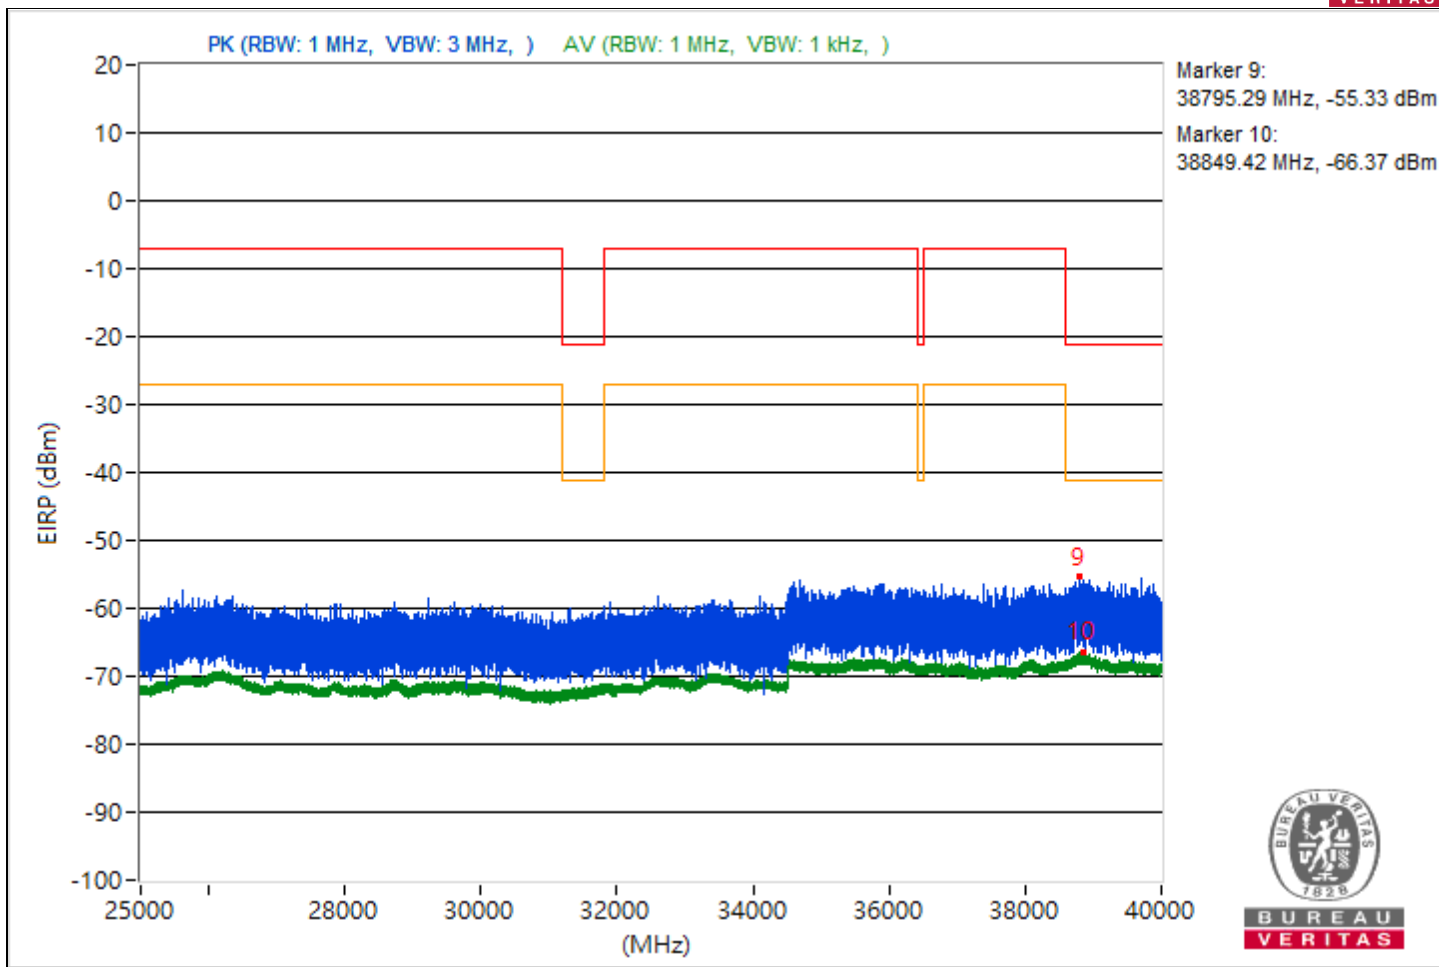


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3737.08	45.89 PK	74	-28.11	-54.29	4.92	-49.37
2	5128.44	33.12 AV	54	-20.88	-67.06	4.92	-62.14
3	7640.04	43.58 PK	74	-30.42	-56.6	4.92	-51.68
4	7250.84	32.55 AV	54	-21.45	-67.63	4.92	-62.71
5	21109.1	45.69 PK	74	-28.31	-54.49	4.92	-49.57
6	20995.1	33.92 AV	54	-20.08	-66.26	4.92	-61.34
7	22343.5	46.85 PK	74	-27.15	-53.33	4.92	-48.41
8	22270.3	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38703.11	40.15 PK	74	-33.85	-60.03	4.92	-55.11
10	38805.96	28.68 AV	54	-25.32	-71.5	4.92	-66.58

Note: Margin value = Emission Level - Limit value

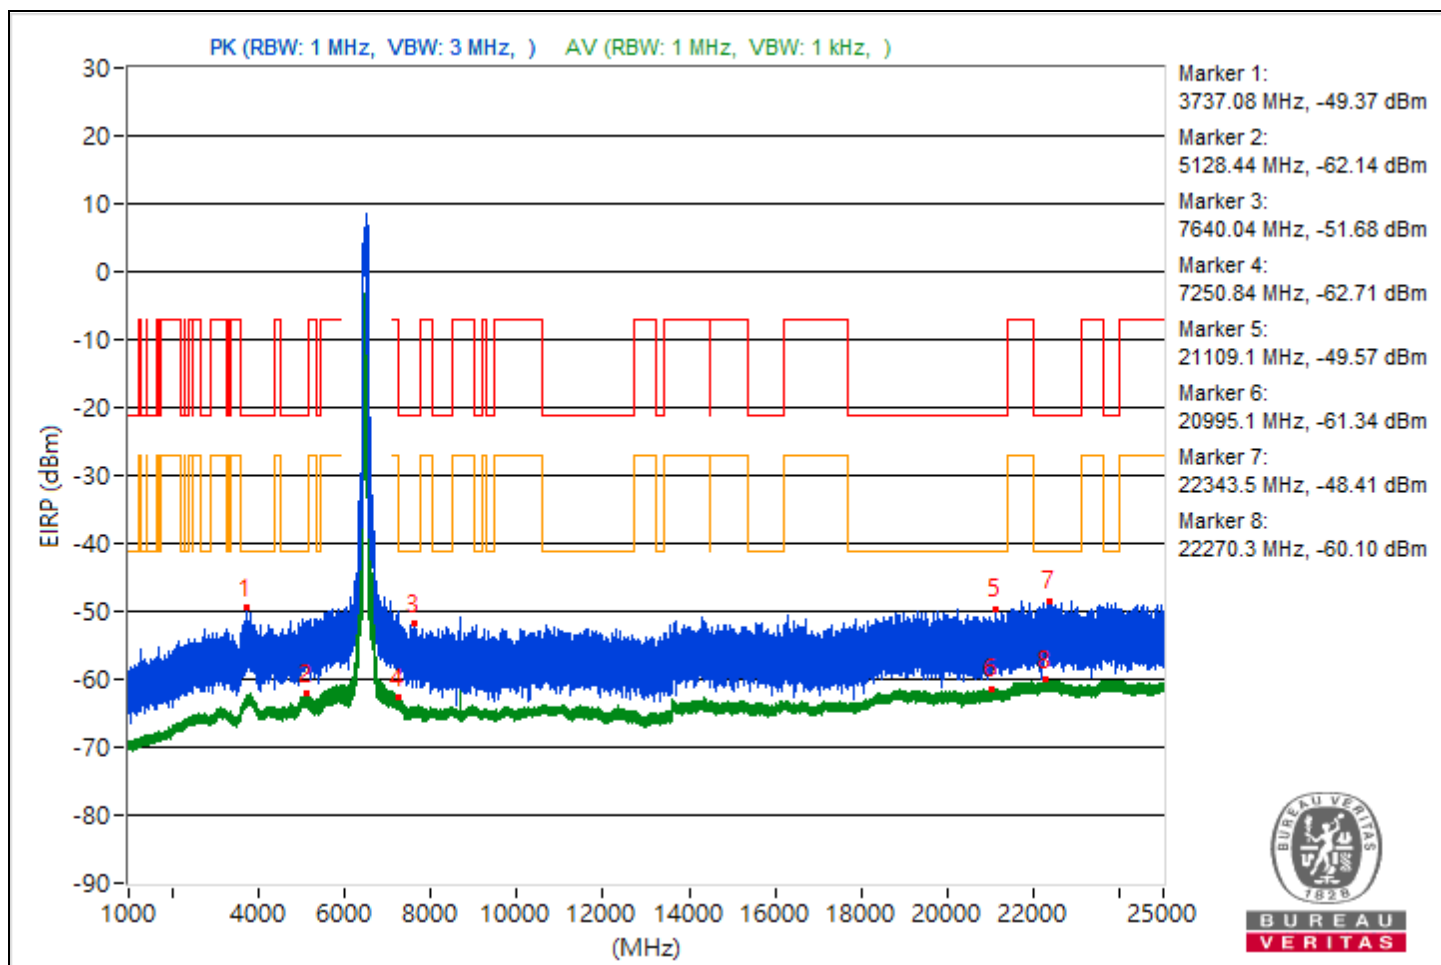


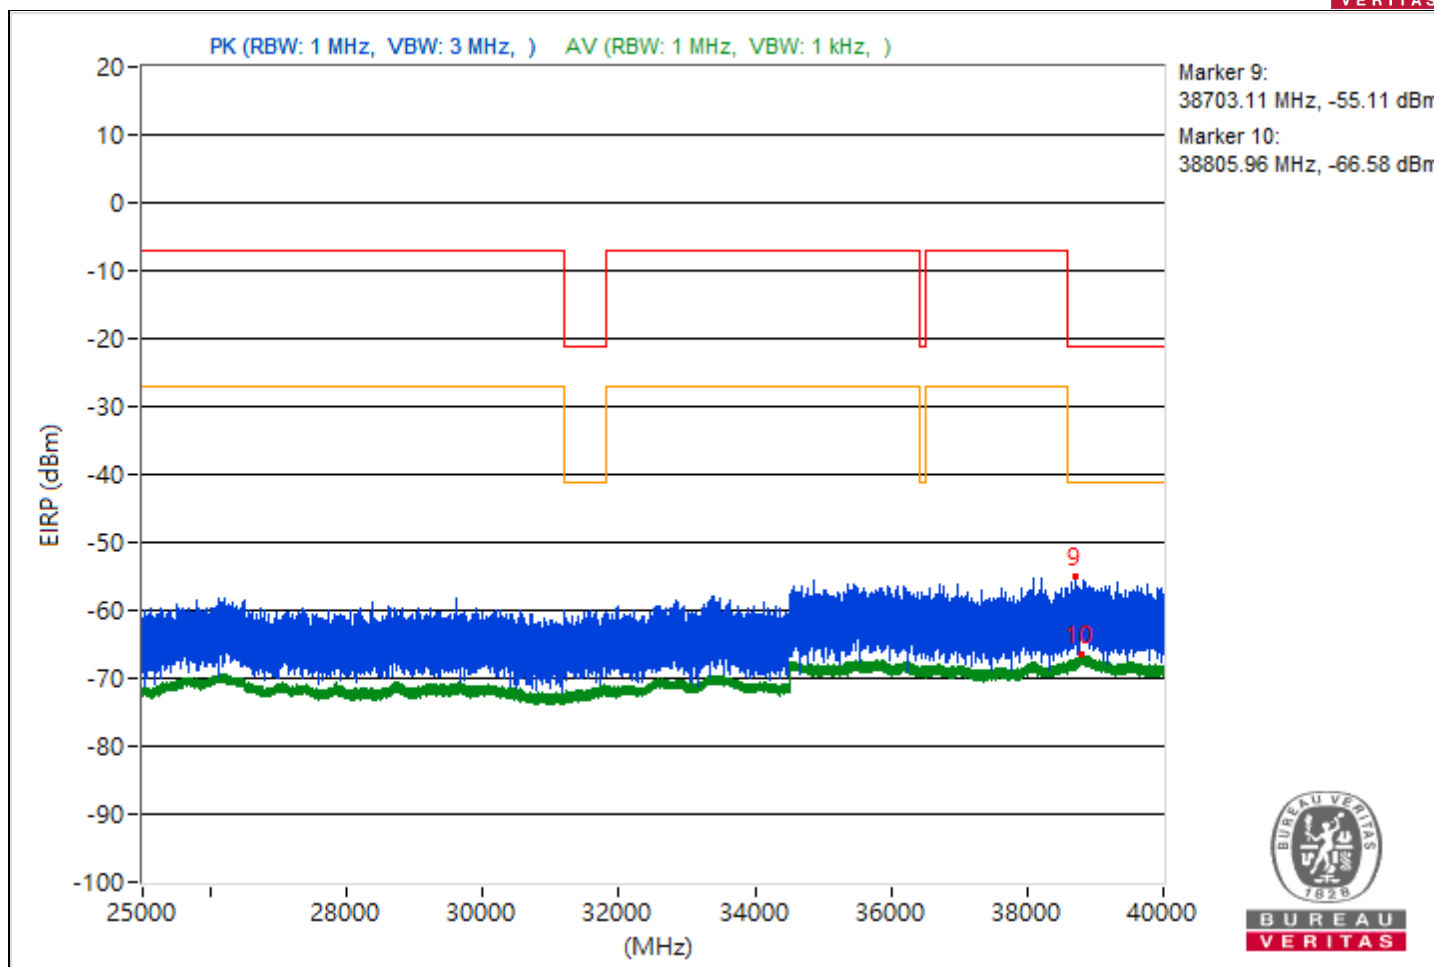


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3699.67	45.28 PK	74	-28.72	-54.9	4.92	-49.98
2	3835.7	32.93 AV	54	-21.07	-67.25	4.92	-62.33
3	7326.52	44.9 PK	74	-29.1	-55.28	4.92	-50.36
4	7284.06	32.8 AV	54	-21.2	-67.38	4.92	-62.46
5	20986.2	46.26 PK	74	-27.74	-53.92	4.92	-49
6	18834.1	33.75 AV	54	-20.25	-66.43	4.92	-61.51
7	23740.9	46.94 PK	74	-27.06	-53.24	4.92	-48.32
8	22299.8	35.12 AV	54	-18.88	-65.06	4.92	-60.14
9	38758.22	39.82 PK	74	-34.18	-60.36	4.92	-55.44
10	38869.69	28.66 AV	54	-25.34	-71.52	4.92	-66.6

Note: Margin value = Emission Level - Limit value

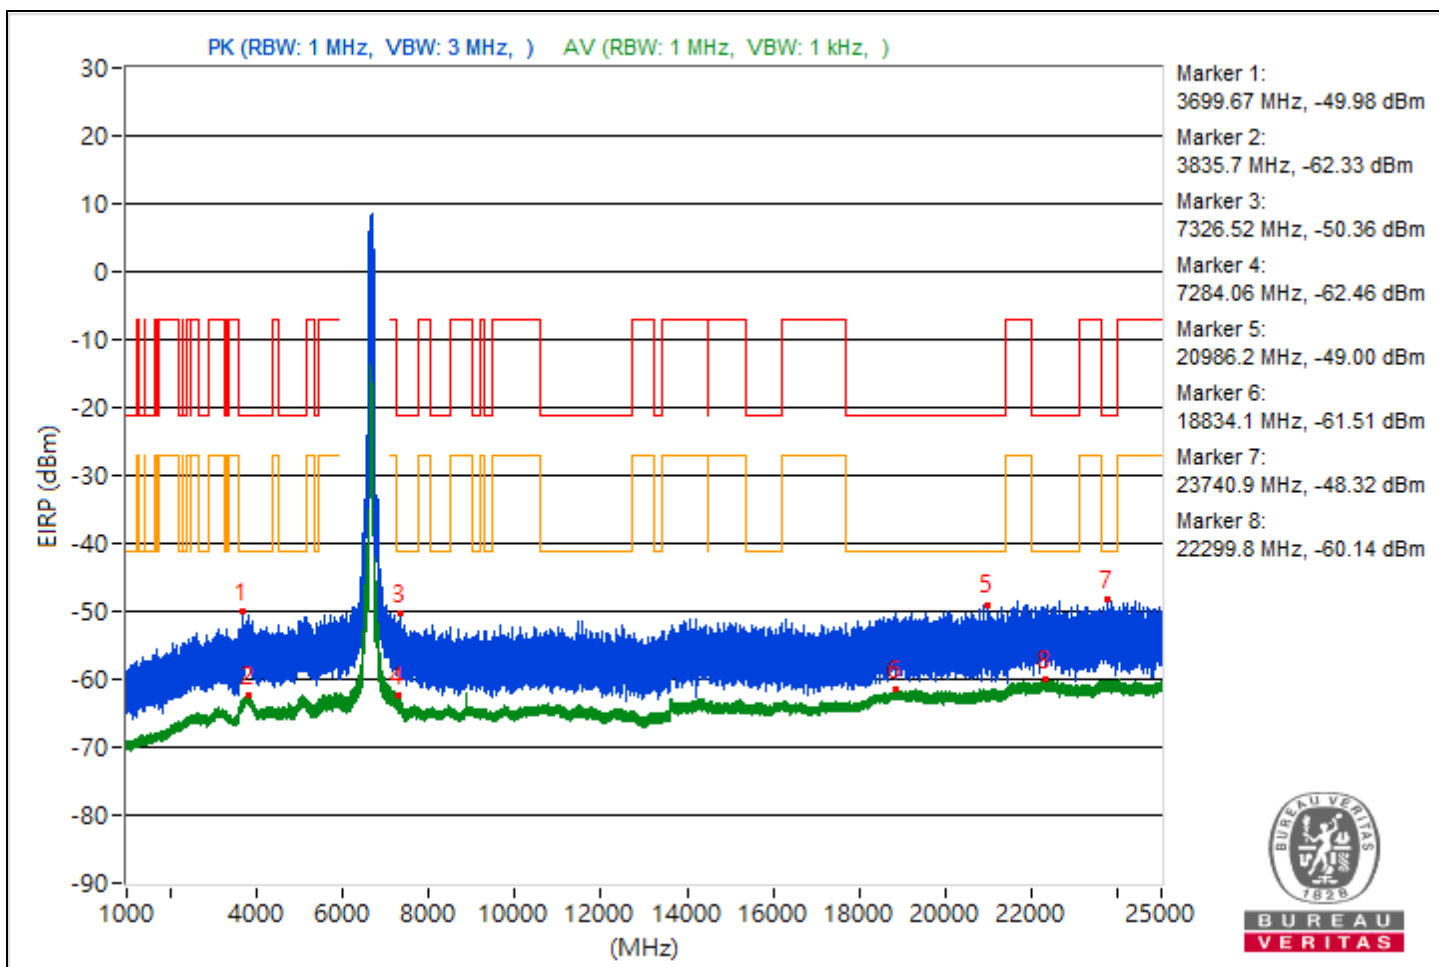


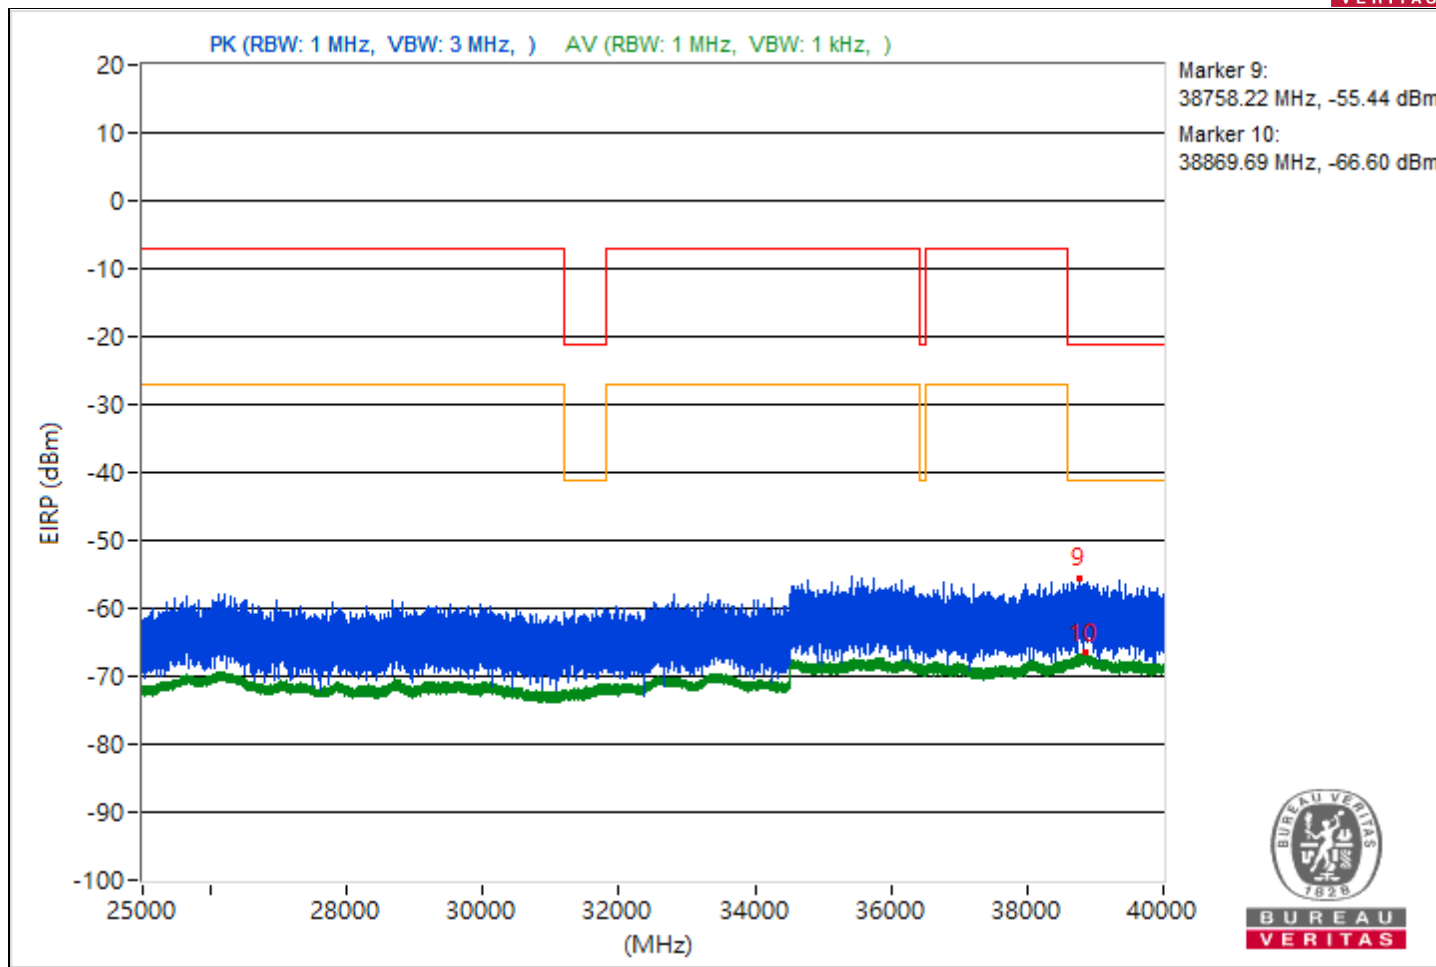


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.77	45 PK	74	-29	-55.18	4.92	-50.26
2	3788.41	32.98 AV	54	-21.02	-67.2	4.92	-62.28
3	7351.26	44.66 PK	74	-29.34	-55.52	4.92	-50.6
4	7251.47	34.18 AV	54	-19.82	-66	4.92	-61.08
5	21048.3	45.69 PK	74	-28.31	-54.49	4.92	-49.57
6	21071.2	33.87 AV	54	-20.13	-66.31	4.92	-61.39
7	23912.7	47.69 PK	74	-26.31	-52.49	4.92	-47.57
8	22342.3	35.15 AV	54	-18.85	-65.03	4.92	-60.11
9	39485.16	39.64 PK	74	-34.36	-60.54	4.92	-55.62
10	38870.49	28.64 AV	54	-25.36	-71.54	4.92	-66.62

Note: Margin value = Emission Level - Limit value

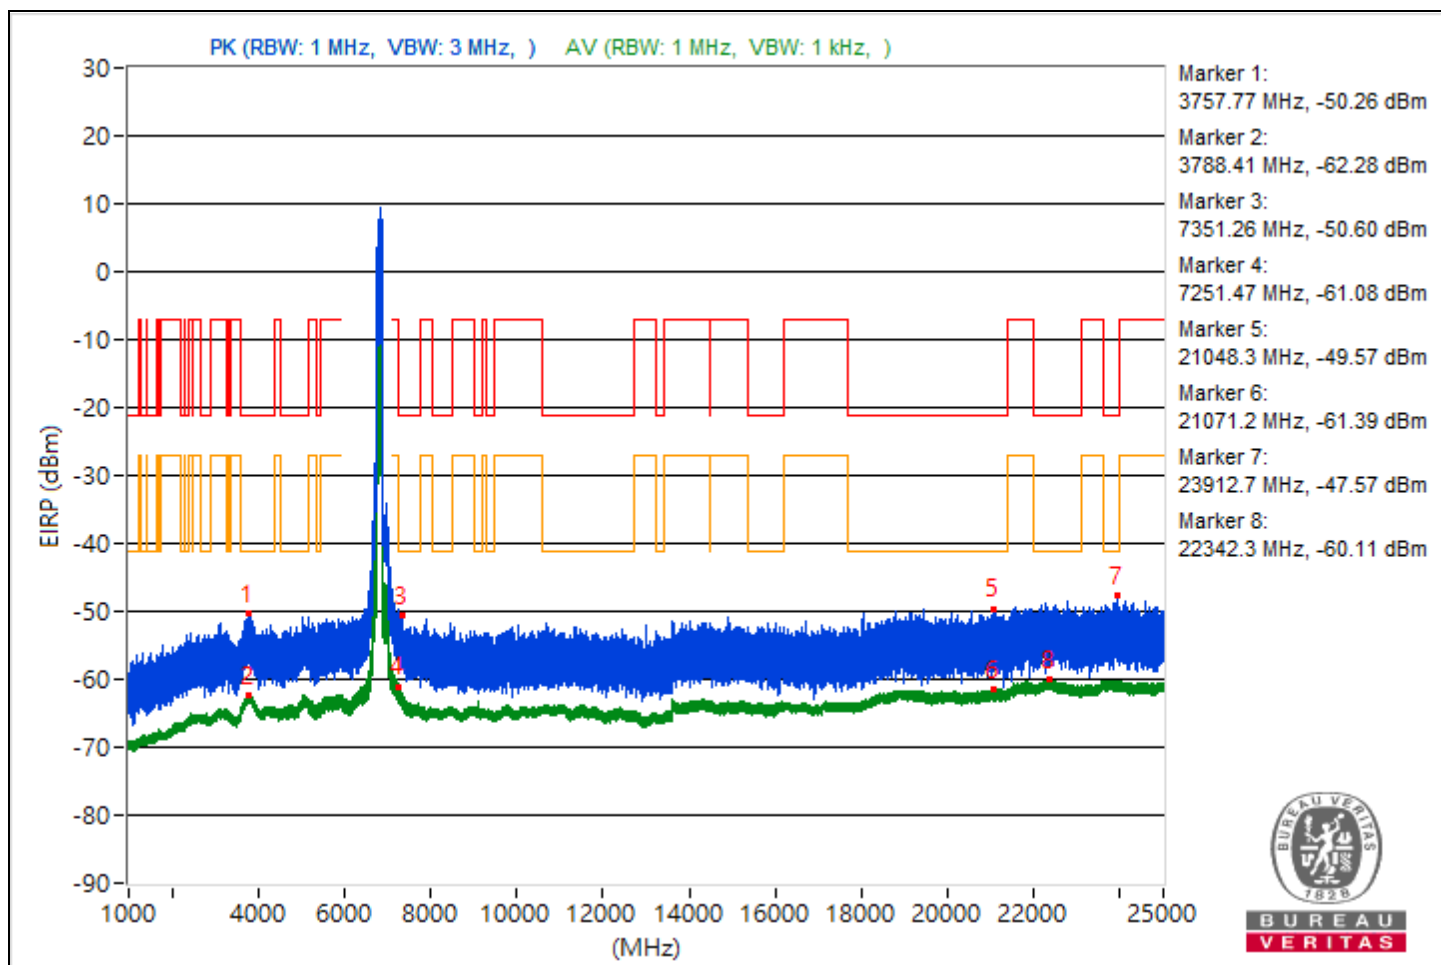


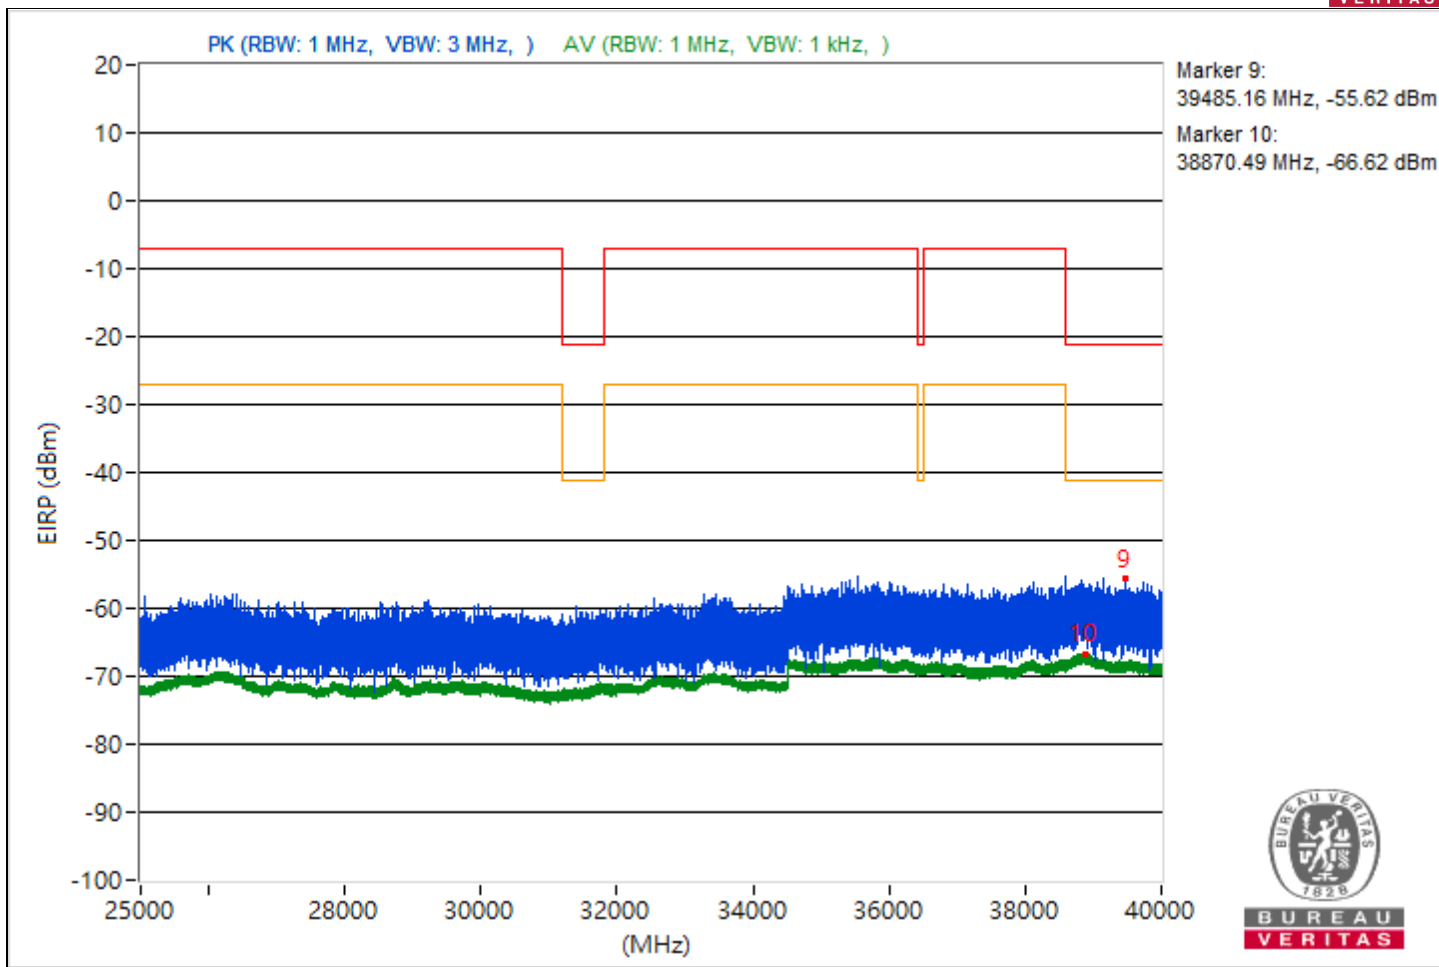


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.57	44.89 PK	74	-29.11	-55.29	4.92	-50.37
2	3784.76	33.04 AV	54	-20.96	-67.14	4.92	-62.22
3	7261.27	47.39 PK	74	-26.61	-52.79	4.92	-47.87
4	7251.47	36.17 AV	54	-17.83	-64.01	4.92	-59.09
5	20347.1	45.48 PK	74	-28.52	-54.7	4.92	-49.78
6	21114.7	33.89 AV	54	-20.11	-66.29	4.92	-61.37
7	22302.1	46.88 PK	74	-27.12	-53.3	4.92	-48.38
8	22229	35.25 AV	54	-18.75	-64.93	4.92	-60.01
9	39788.98	39.64 PK	74	-34.36	-60.54	4.92	-55.62
10	38808.62	28.53 AV	54	-25.47	-71.65	4.92	-66.73

Note: Margin value = Emission Level - Limit value

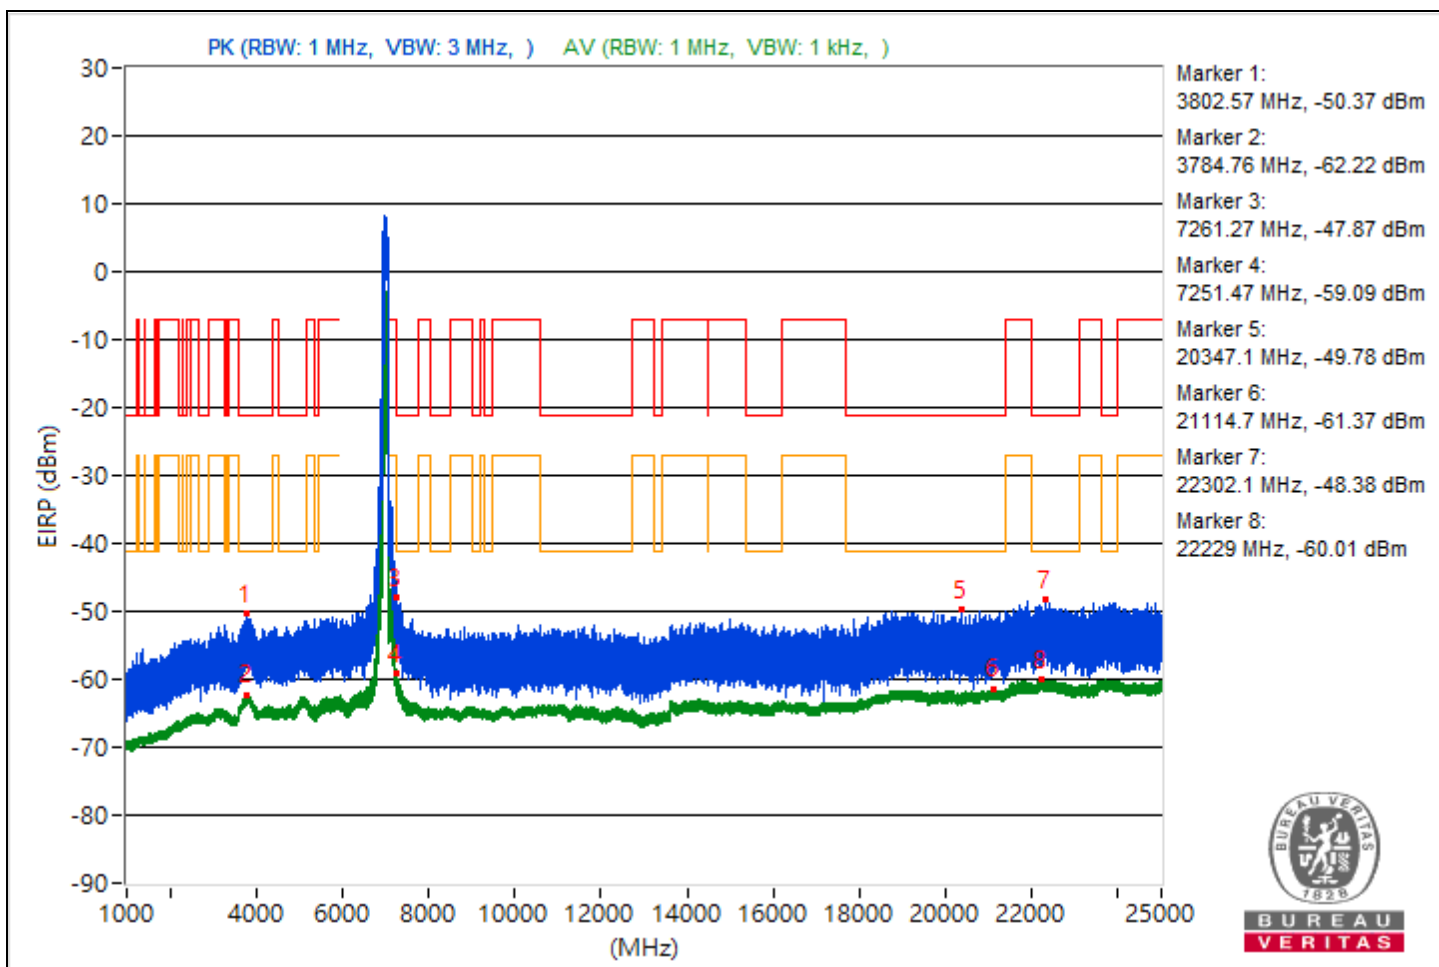

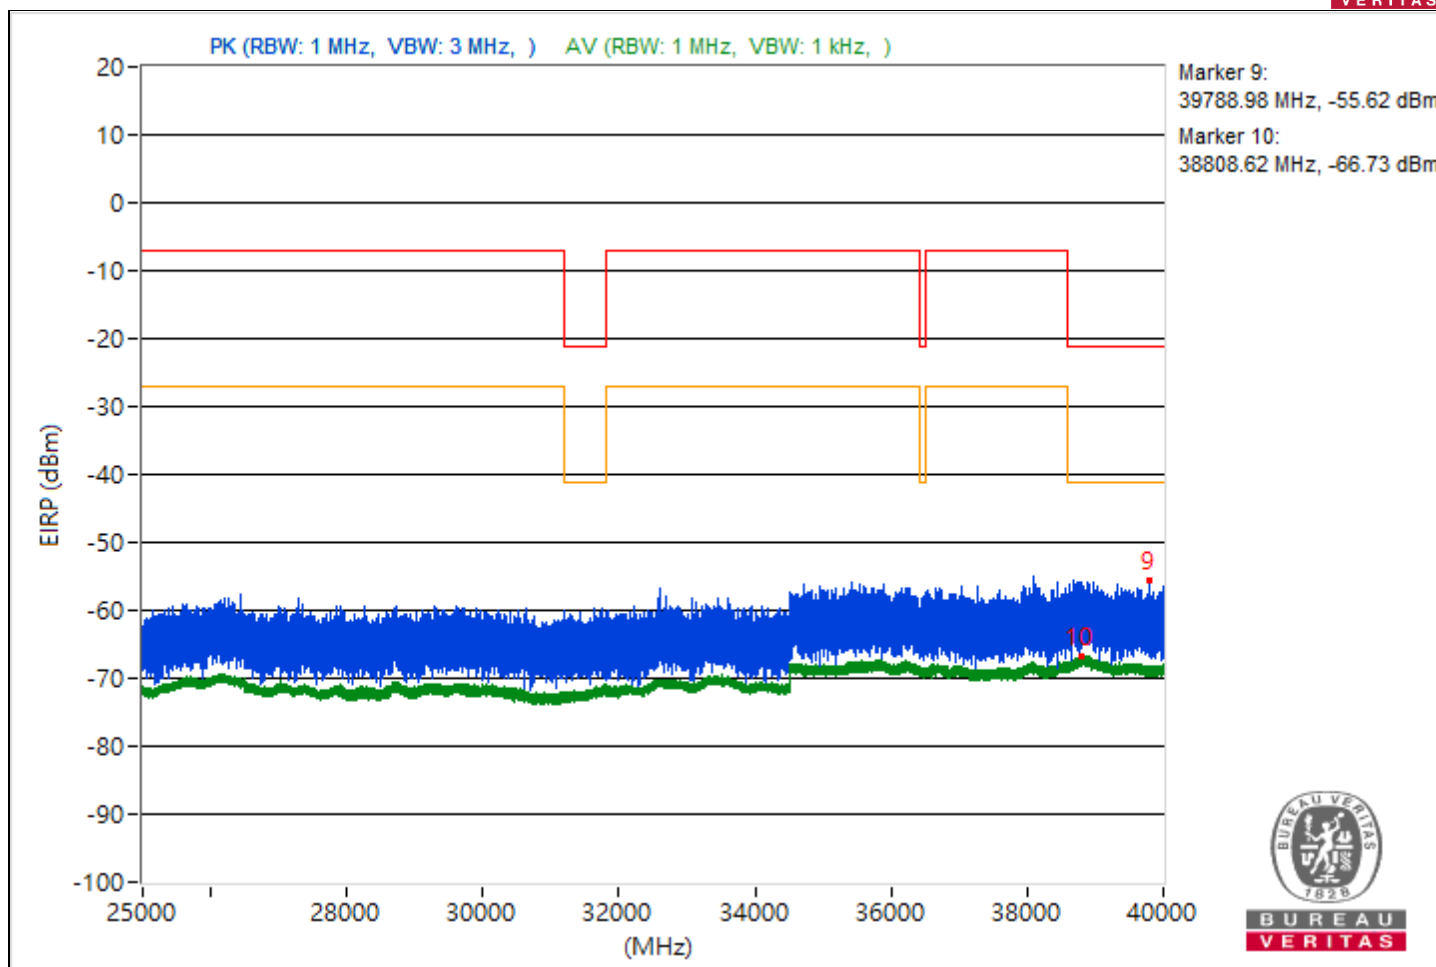


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.12	99.89 PK			-0.13	4.76	4.63
2	*5954.12	89.52 AV			-10.5	4.76	-5.74
3	#5902.5	63.46 PK	88.26	-24.8	-36.56	4.76	-31.8
4	#5840.4	50.59 AV	68.26	-17.67	-49.43	4.76	-44.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.


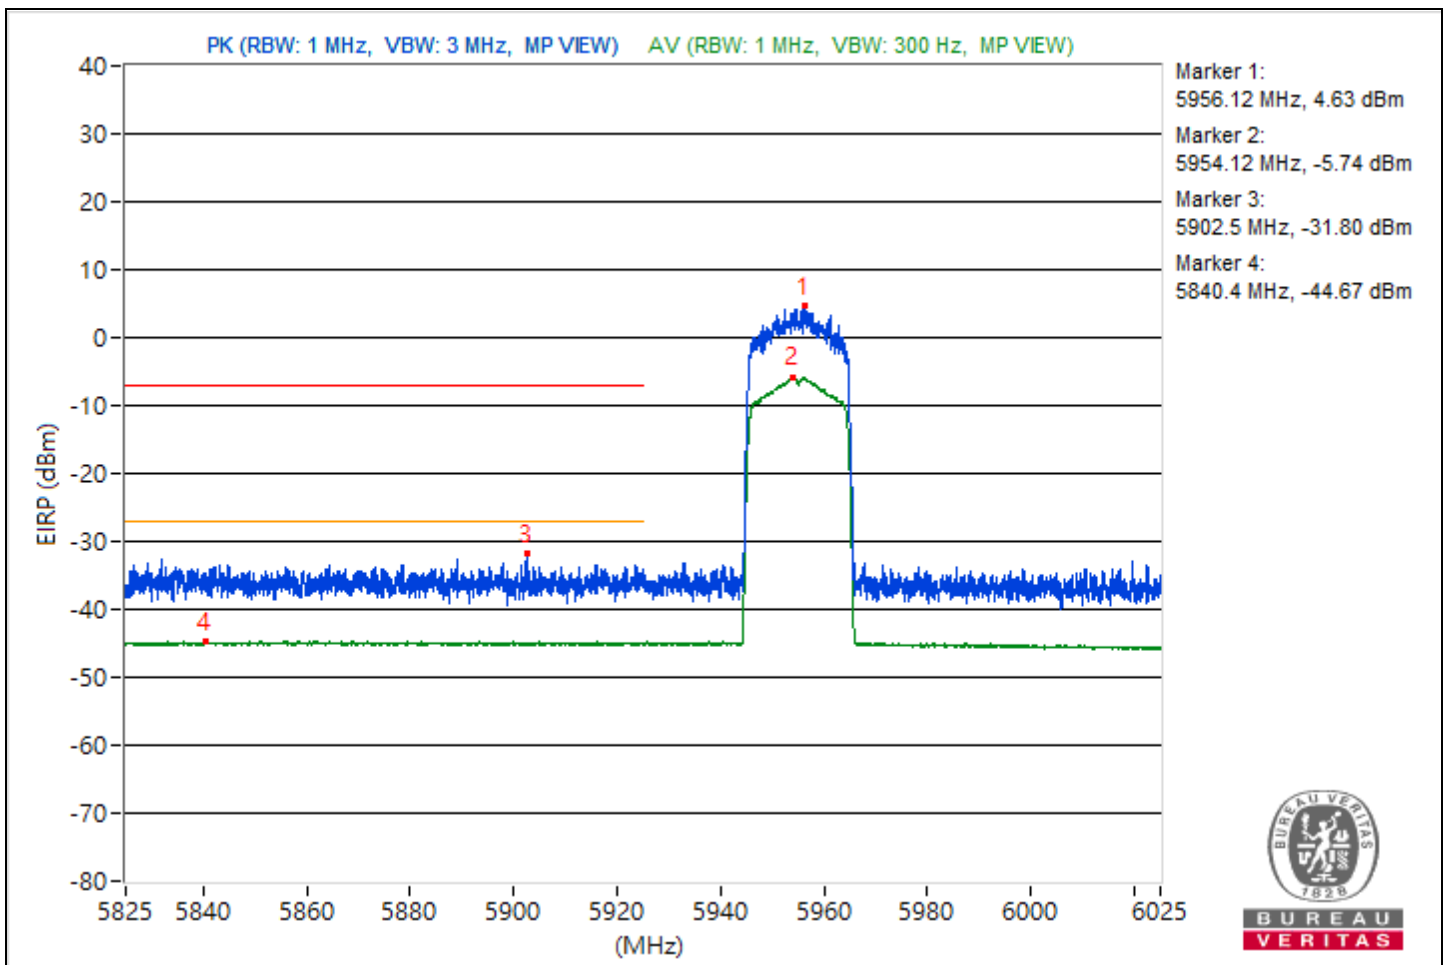


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	48.47 PK	88.2	-39.73	-50.88	4.09	-46.79
2	#7125	38.92 AV	68.2	-29.28	-60.43	4.09	-56.34

- Notes:
1. Margin value = Emission Level - Limit value
 2. " # ": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

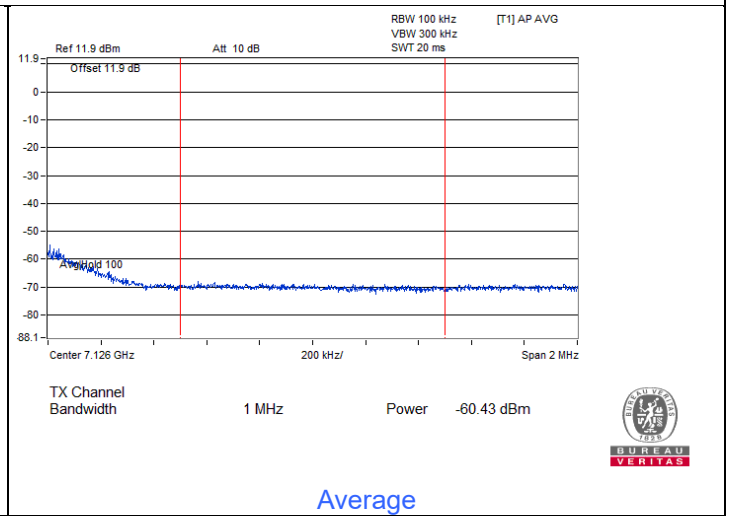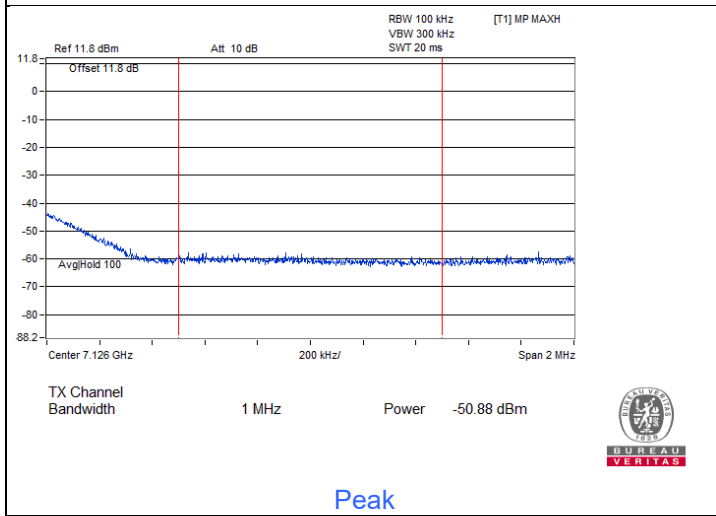


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5964.37	115.12 PK			15.1	4.76	19.86
2	*5966	104.6 AV			4.58	4.76	9.34
3	#5919.12	81.91 PK	88.26	-6.35	-18.11	4.76	-13.35
4	#5924.8	67.93 AV	68.26	-0.33	-32.09	4.76	-27.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

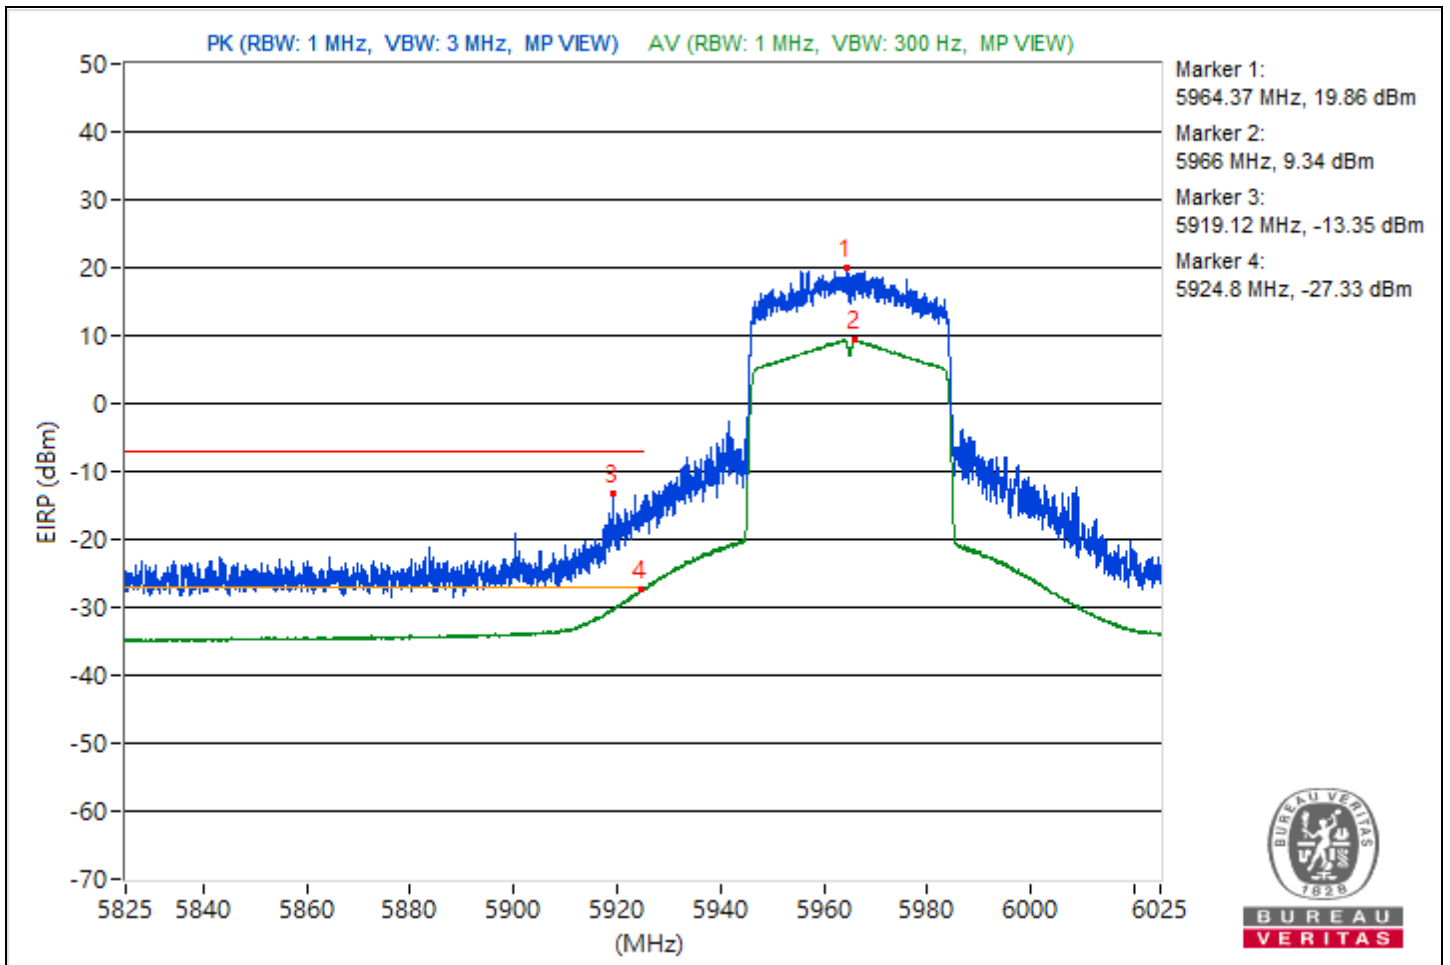


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7089.43	102.41 PK			3.06	4.09	7.15
2	*7086.1	92.31 AV			-7.04	4.09	-2.95
3	#7137.25	53.91 PK	88.26	-34.35	-45.44	4.09	-41.35
4	#7125.18	42.9 AV	68.26	-25.36	-56.45	4.09	-52.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

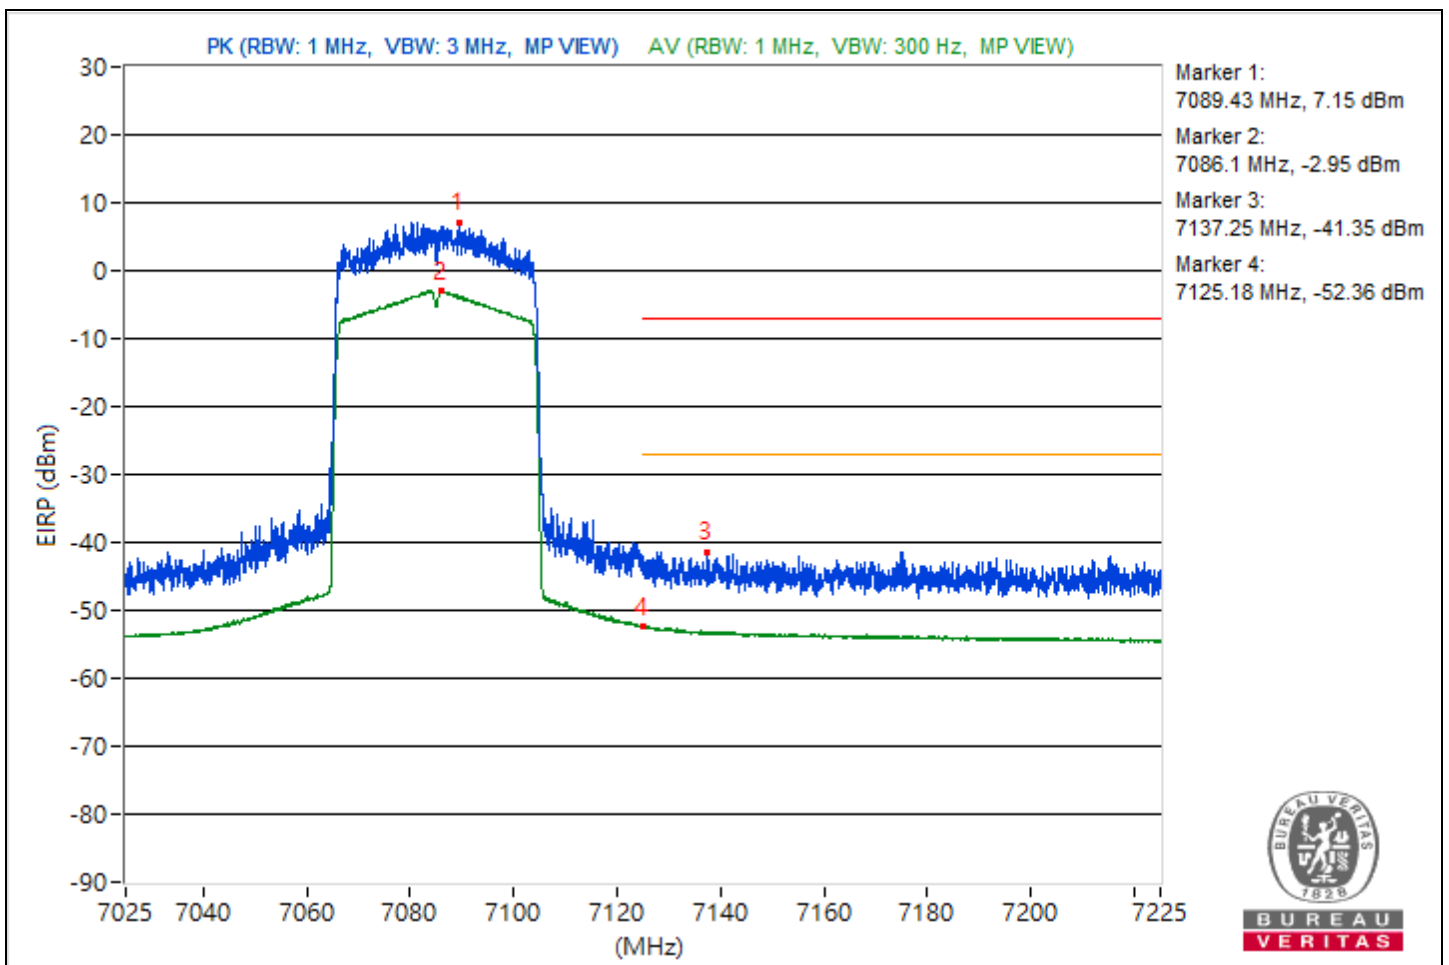


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5978.65	111.16 PK			11.14	4.76	15.9
2	*5983.27	100.55 AV			0.53	4.76	5.29
3	#5913.68	81.53 PK	88.26	-6.73	-18.49	4.76	-13.73
4	#5923.15	68.04 AV	68.26	-0.22	-31.98	4.76	-27.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

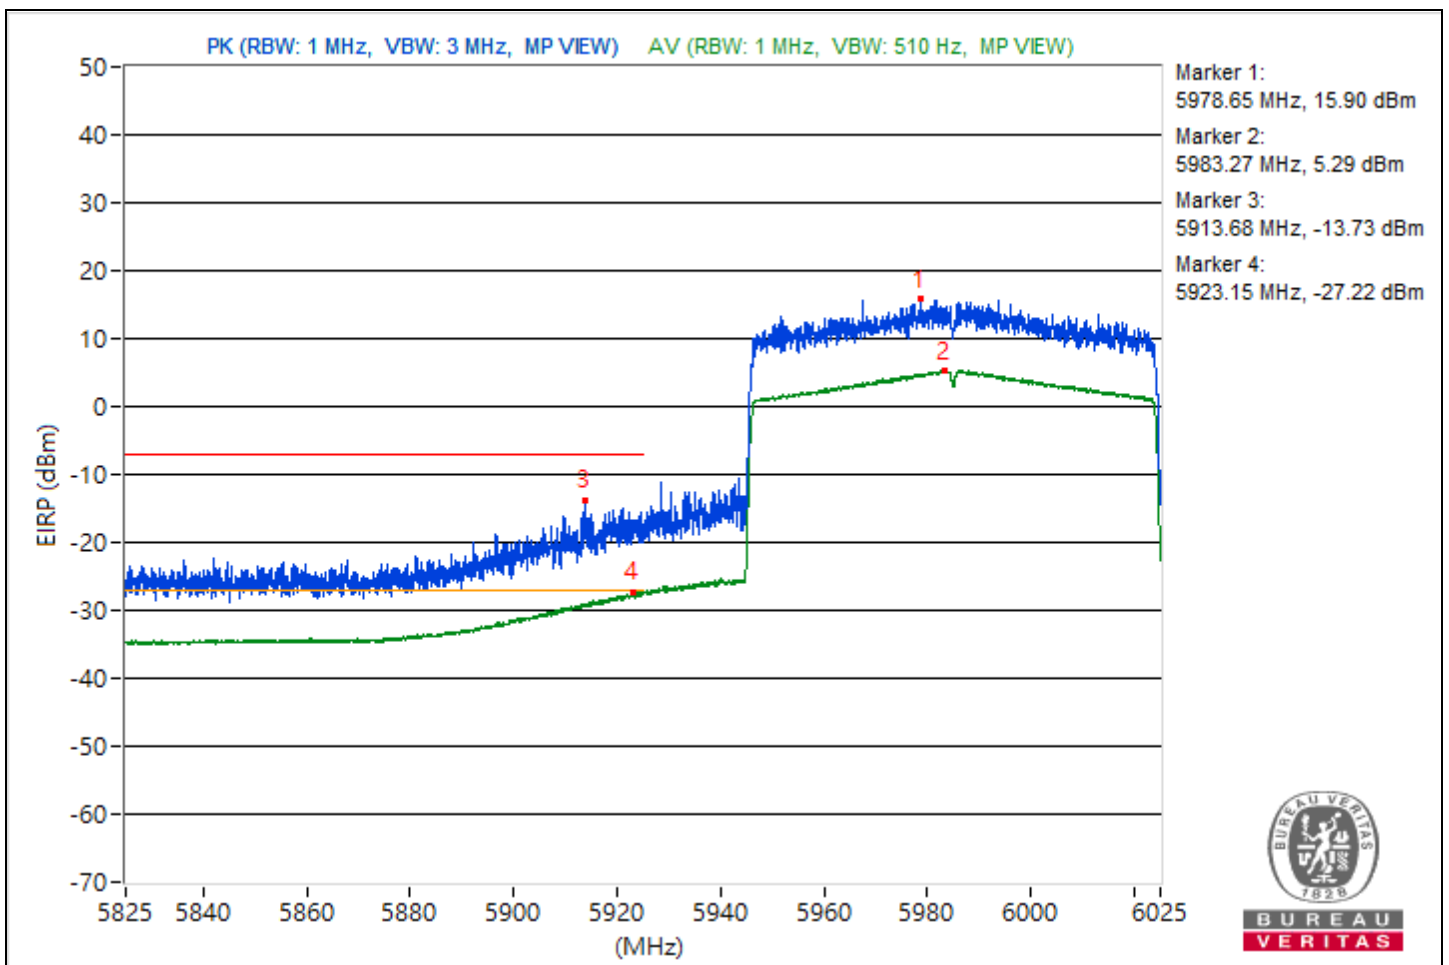


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7031.12	103.45 PK			4.1	4.09	8.19
2	*7027.43	92.33 AV			-7.02	4.09	-2.93
3	#7133.95	53.94 PK	88.26	-34.32	-45.41	4.09	-41.32
4	#7125.23	42.46 AV	68.26	-25.8	-56.89	4.09	-52.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

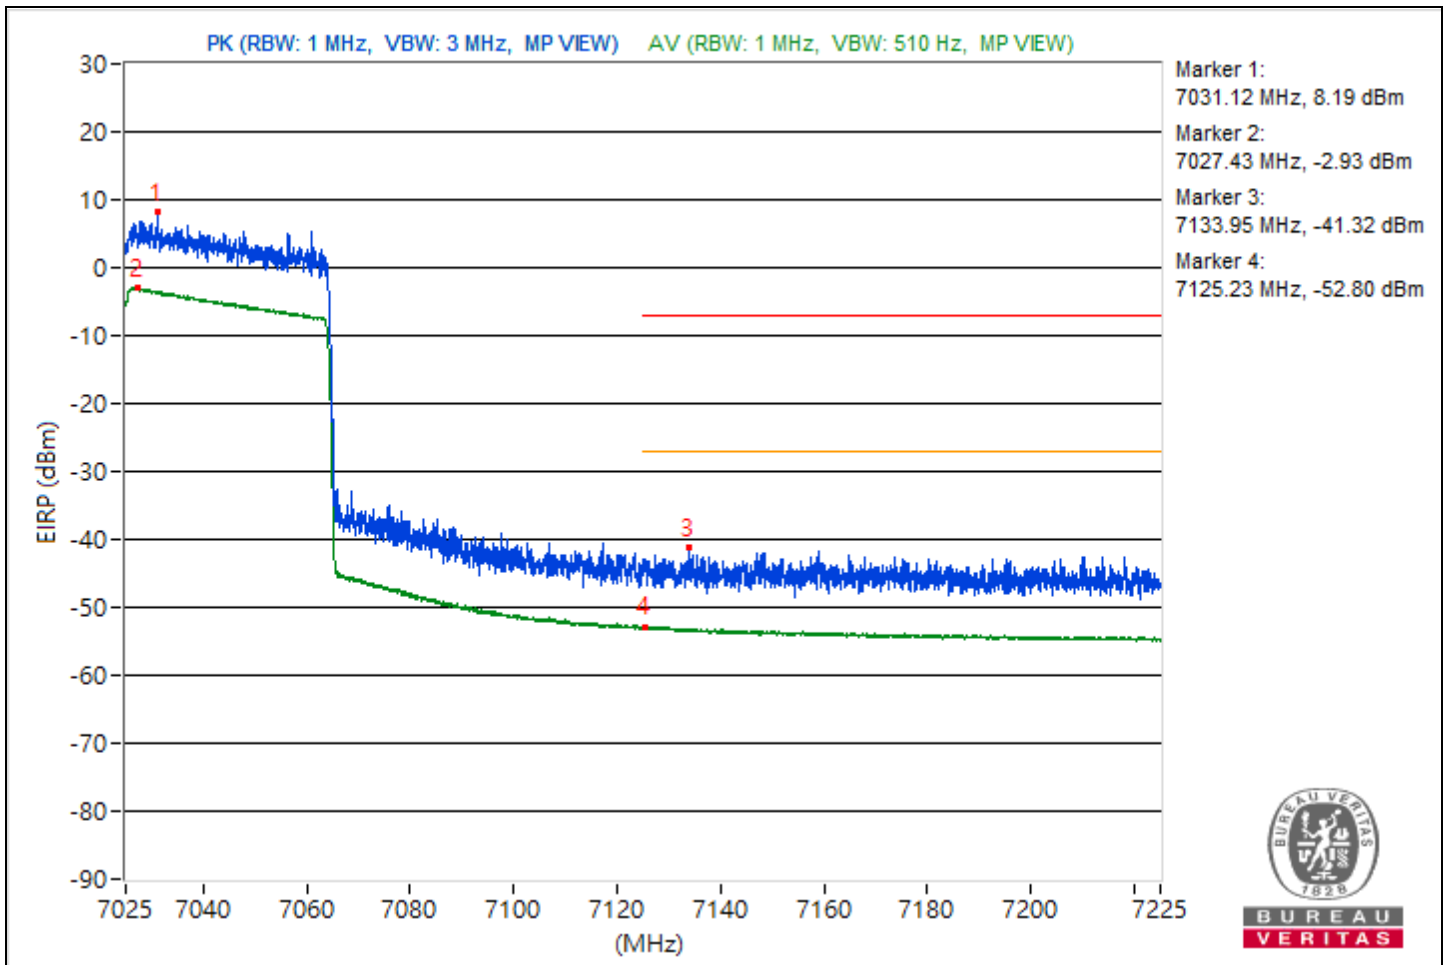


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6013.3	103.34 PK			3.32	4.76	8.08
2	*6022.9	92.08 AV			-7.94	4.76	-3.18
3	#5897.43	64.73 PK	88.26	-23.53	-35.29	4.76	-30.53
4	#5923.85	53.65 AV	68.26	-14.61	-46.37	4.76	-41.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

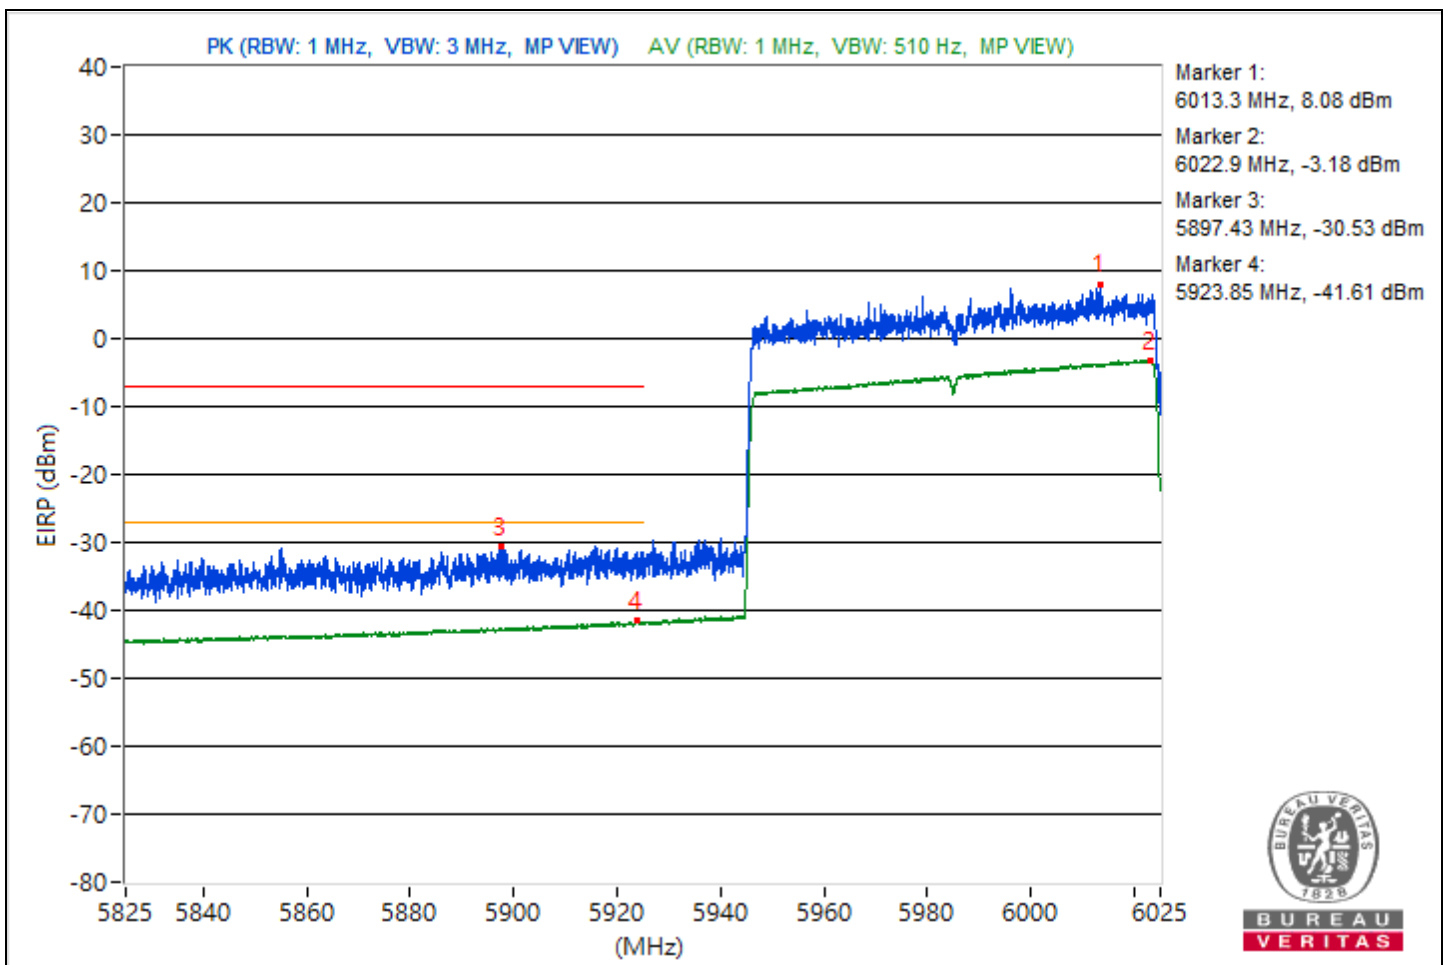


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7038.95	101.52 PK			2.17	4.09	6.26
2	*7028.57	89.72 AV			-9.63	4.09	-5.54
3	#7153.37	65.09 PK	88.26	-23.17	-34.26	4.09	-30.17
4	#7155.02	50.15 AV	68.26	-18.11	-49.2	4.09	-45.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

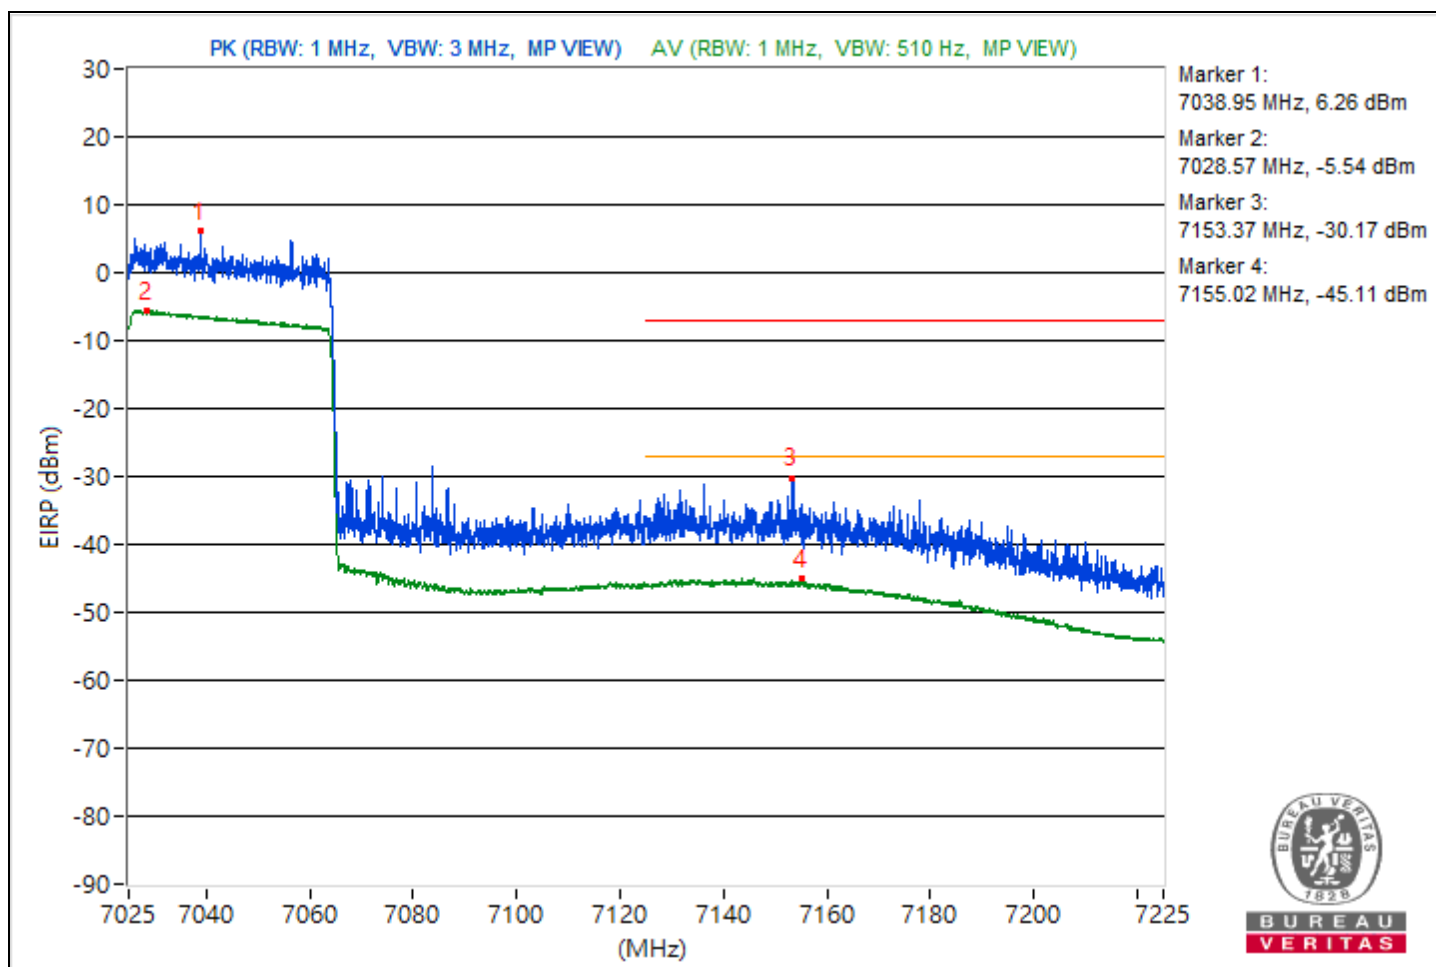


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.85	103.59 PK			3.57	4.76	8.33
2	*5946.57	91.69 AV			-8.33	4.76	-3.57
3	#5911.8	63.47 PK	88.26	-24.79	-36.55	4.76	-31.79
4	#5859.12	51.28 AV	68.26	-16.98	-48.74	4.76	-43.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.


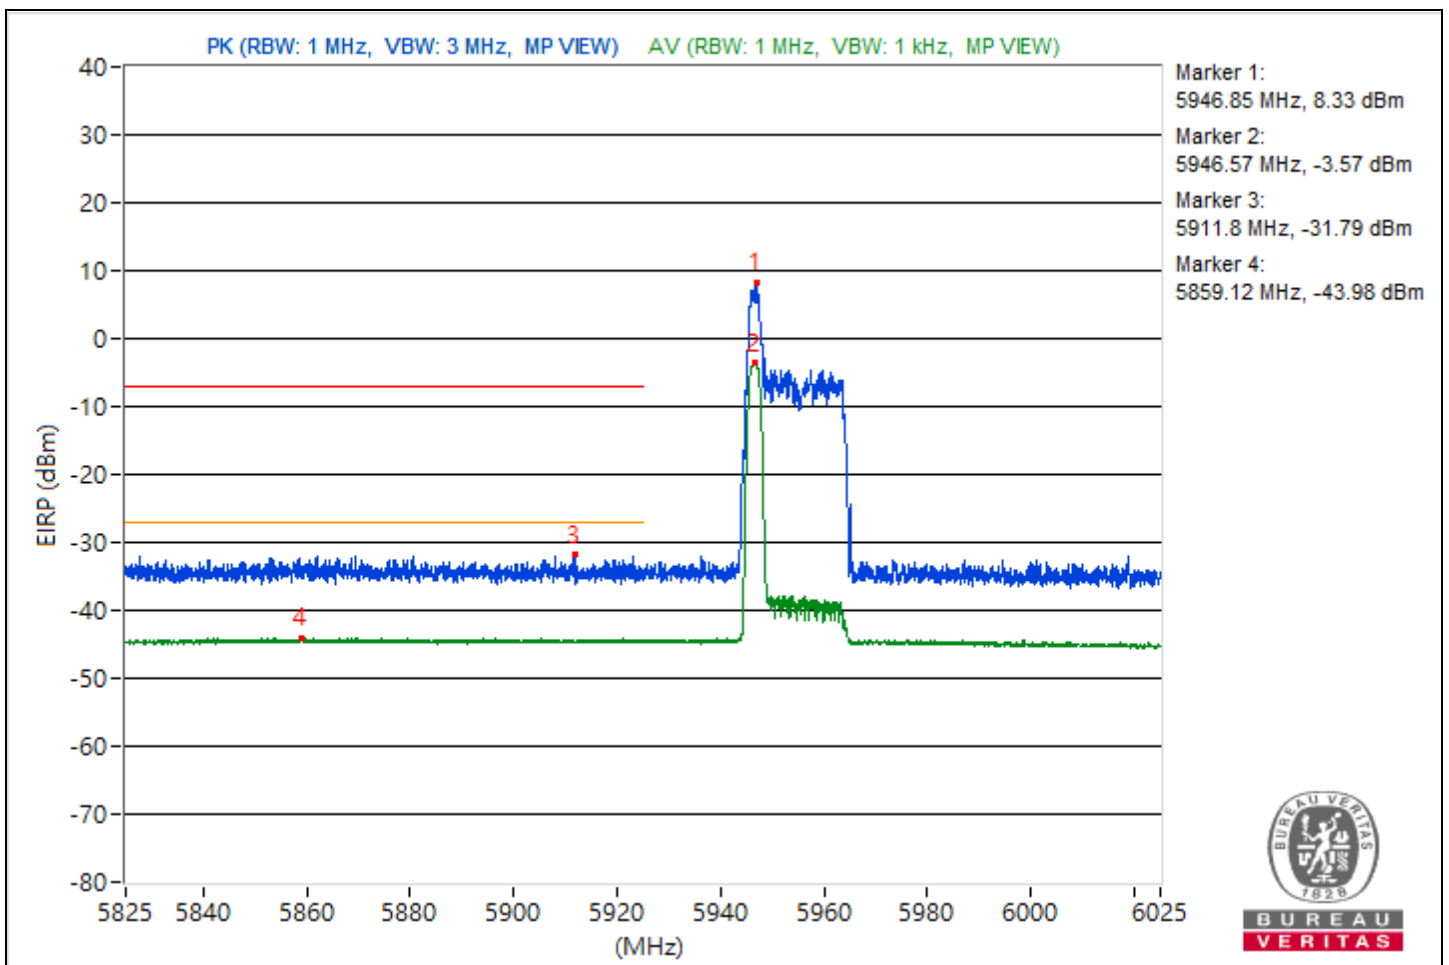


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	60.82 PK	88.2	-27.38	-38.53	4.09	-34.44
2	#7125	46.72 AV	68.2	-21.48	-52.63	4.09	-48.54

- Notes:
1. Margin value = Emission Level - Limit value
 2. " # ": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

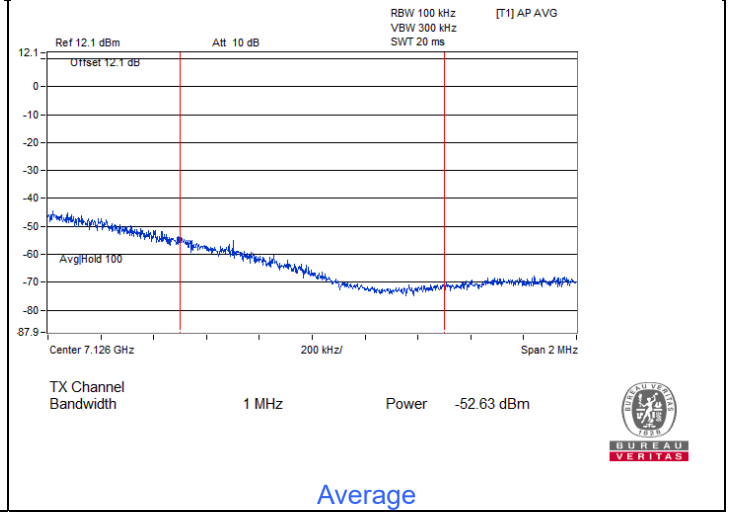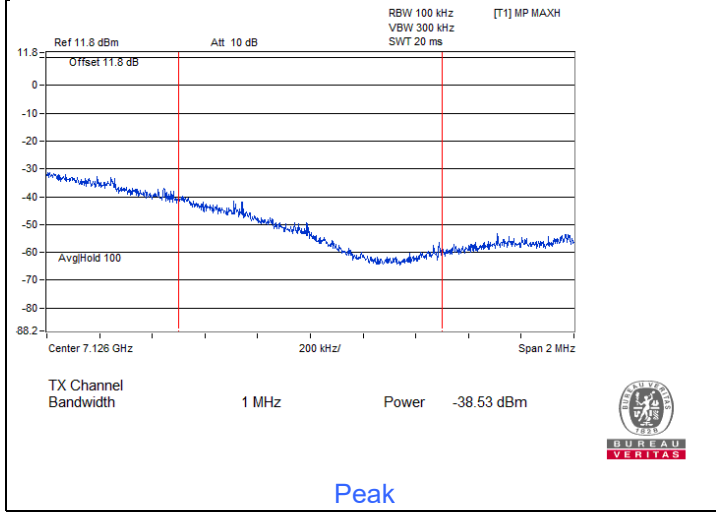


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.8	101.12 PK			1.1	4.76	5.86
2	*5947.75	89.34 AV			-10.68	4.76	-5.92
3	#5858.2	64.55 PK	88.26	-23.71	-35.47	4.76	-30.71
4	#5843.57	51.29 AV	68.26	-16.97	-48.73	4.76	-43.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

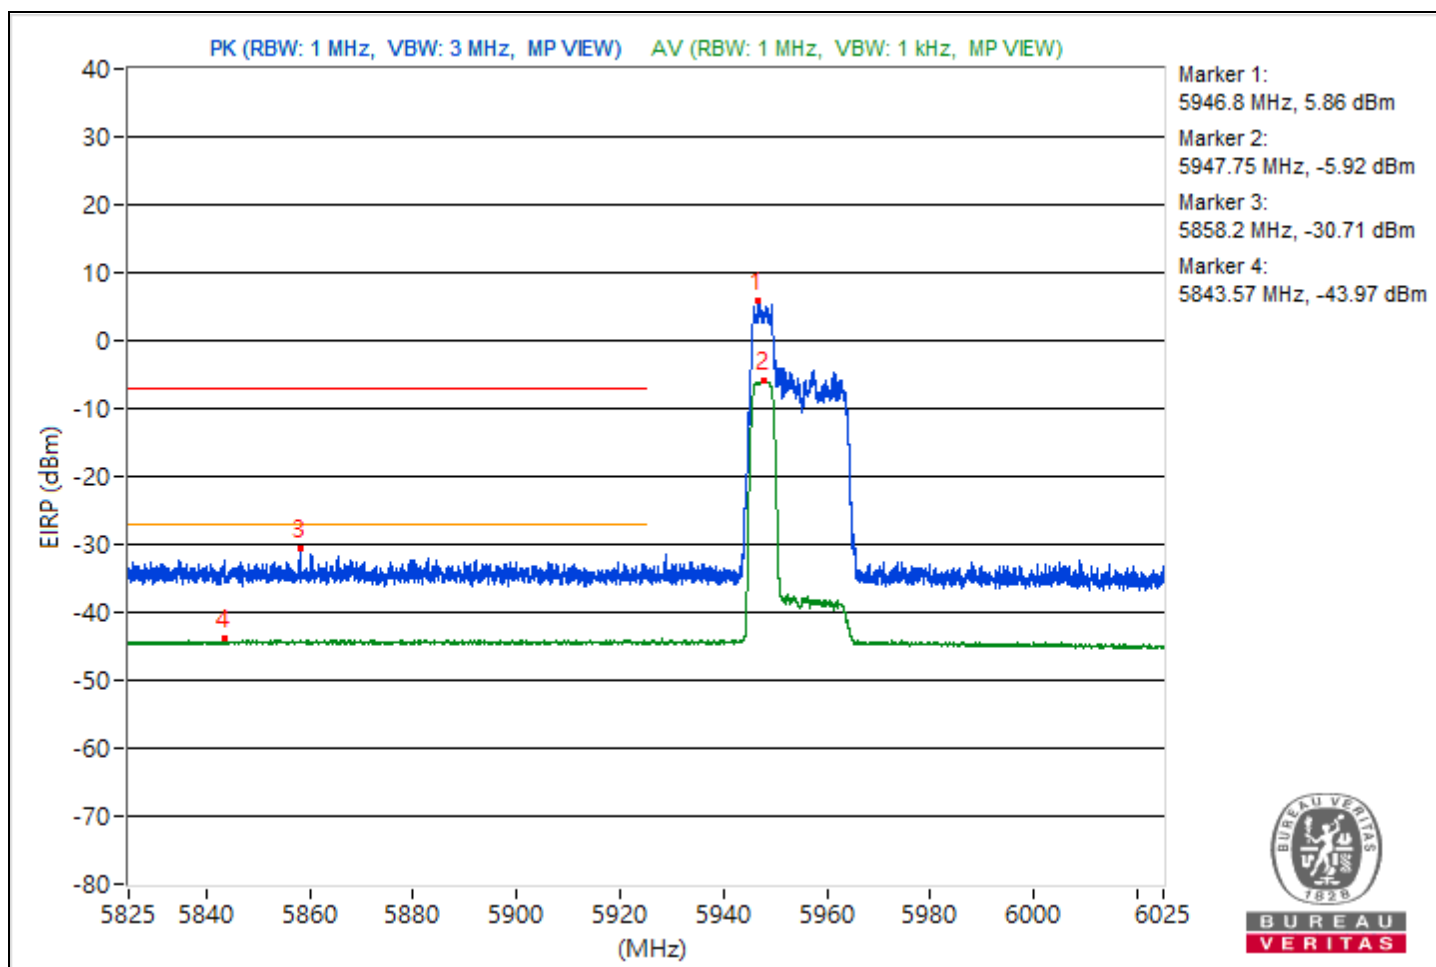


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	60.74 PK	88.2	-27.46	-38.61	4.09	-34.52
2	#7125	46.93 AV	68.2	-21.27	-52.42	4.09	-48.33

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

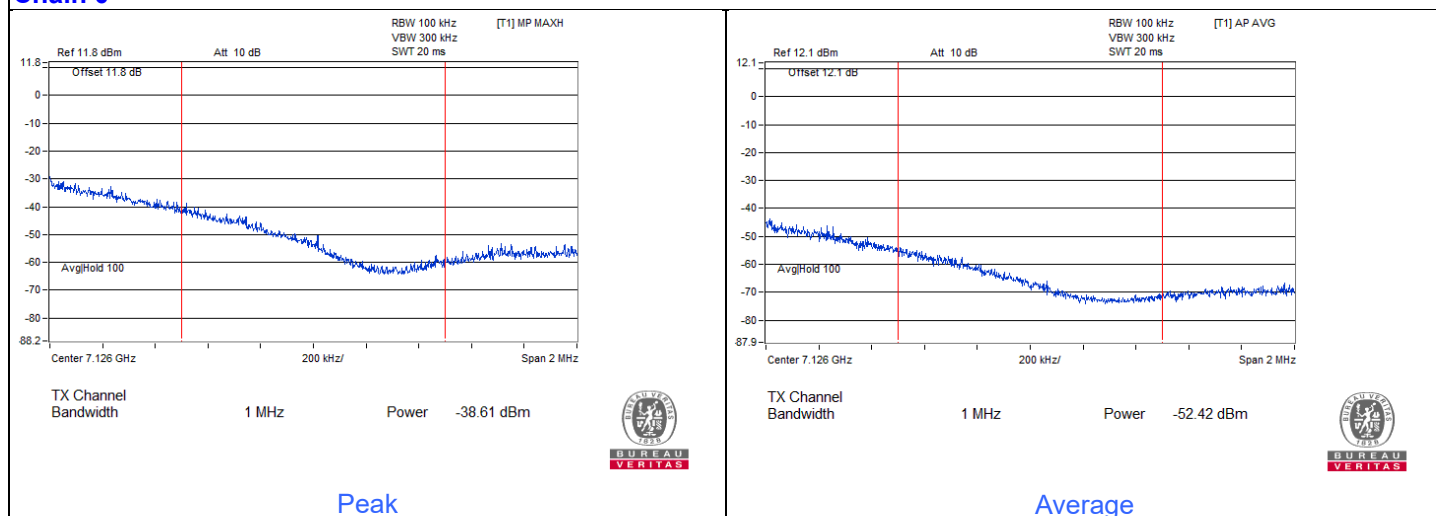


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.43	103.84 PK			3.82	4.76	8.58
2	*5950.55	91.74 AV			-8.28	4.76	-3.52
3	#5861.2	64.43 PK	88.26	-23.83	-35.59	4.76	-30.83
4	#5855.75	51.16 AV	68.26	-17.1	-48.86	4.76	-44.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

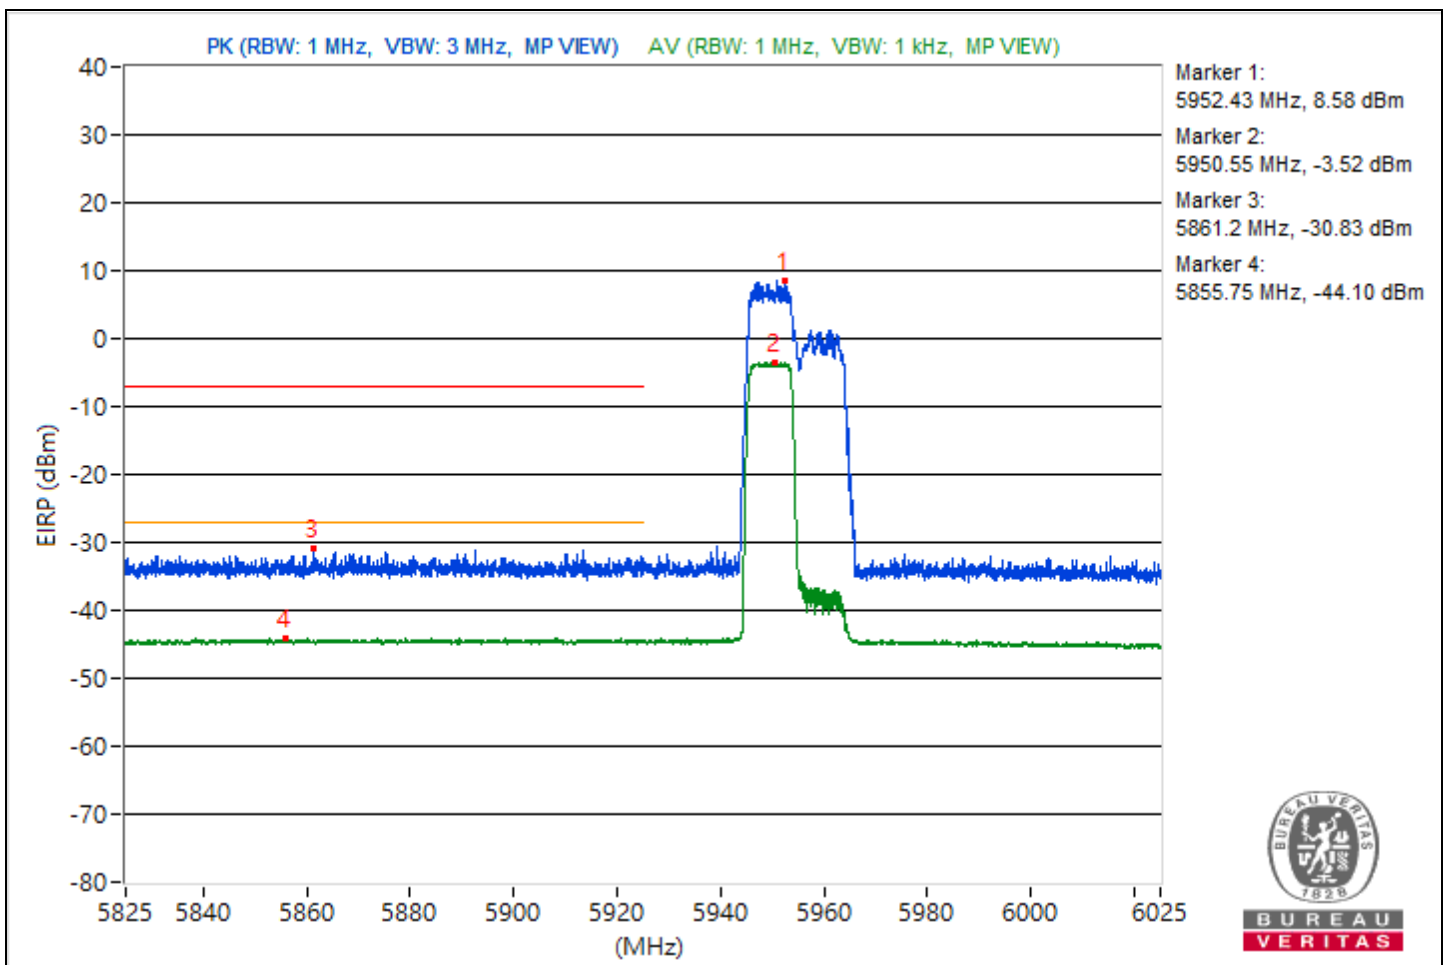


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	62.5 PK	88.2	-25.7	-36.85	4.09	-32.76
2	#7125	48.18 AV	68.2	-20.02	-51.17	4.09	-47.08

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

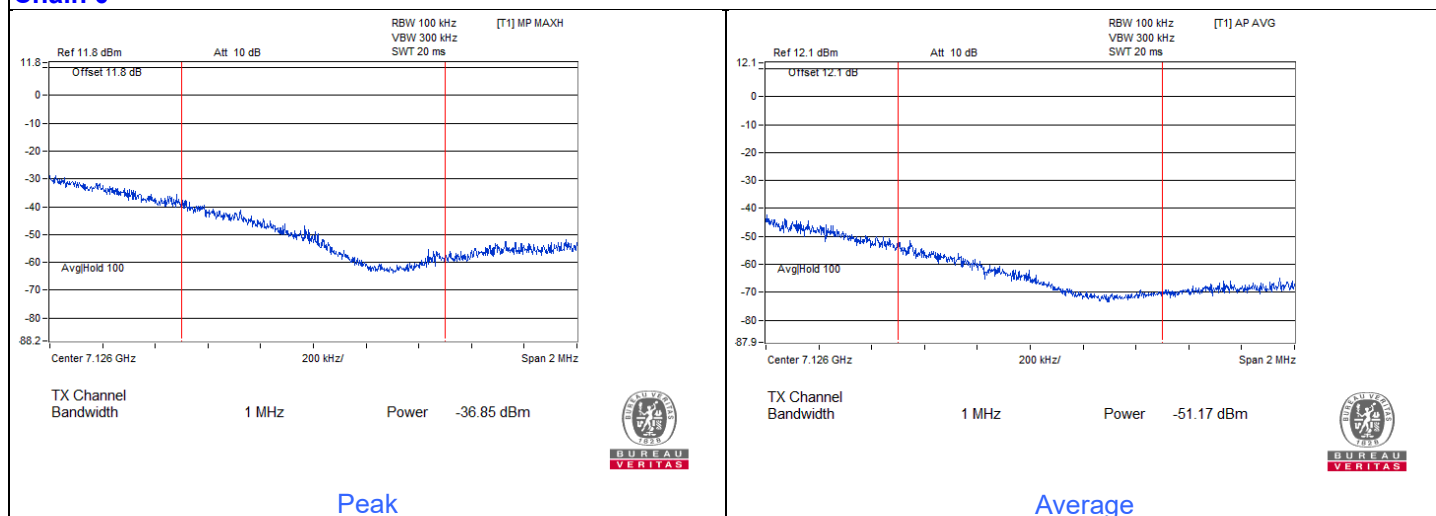


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.05	103.25 PK			3.23	4.76	7.99
2	*5952.55	91.65 AV			-8.37	4.76	-3.61
3	#5826.25	63.98 PK	88.26	-24.28	-36.04	4.76	-31.28
4	#5881.43	51.3 AV	68.26	-16.96	-48.72	4.76	-43.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

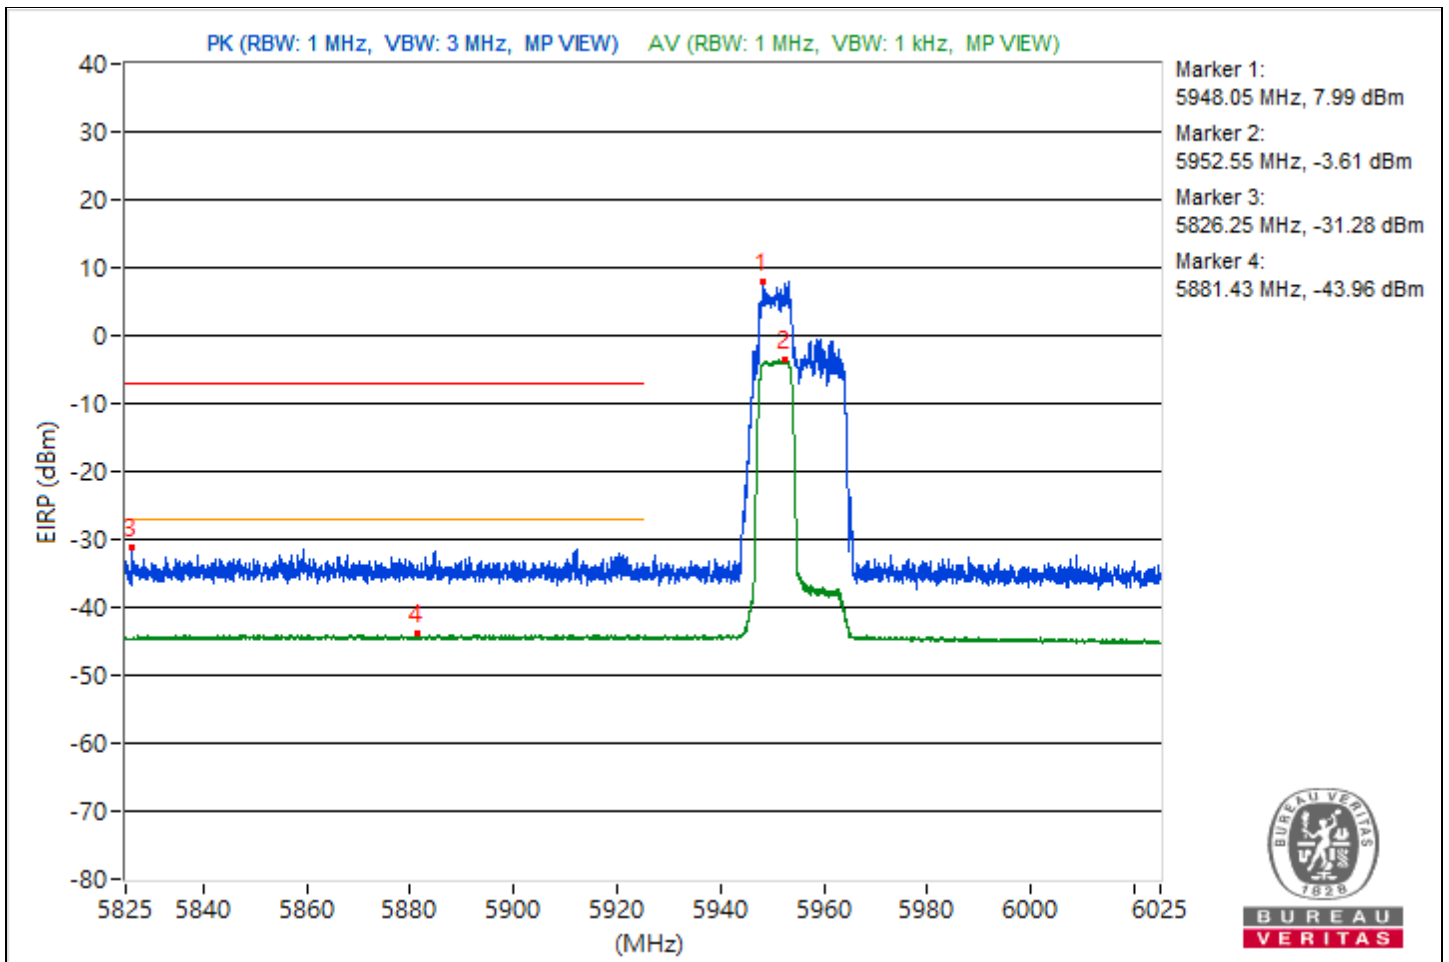


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.05	103.24 PK			3.89	4.09	7.98
2	*7116.93	92.4 AV			-6.95	4.09	-2.86
3	#7125.3	74.19 PK	88.26	-14.07	-25.16	4.09	-21.07
4	#7125	43.29 AV	68.26	-24.97	-56.06	4.09	-51.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

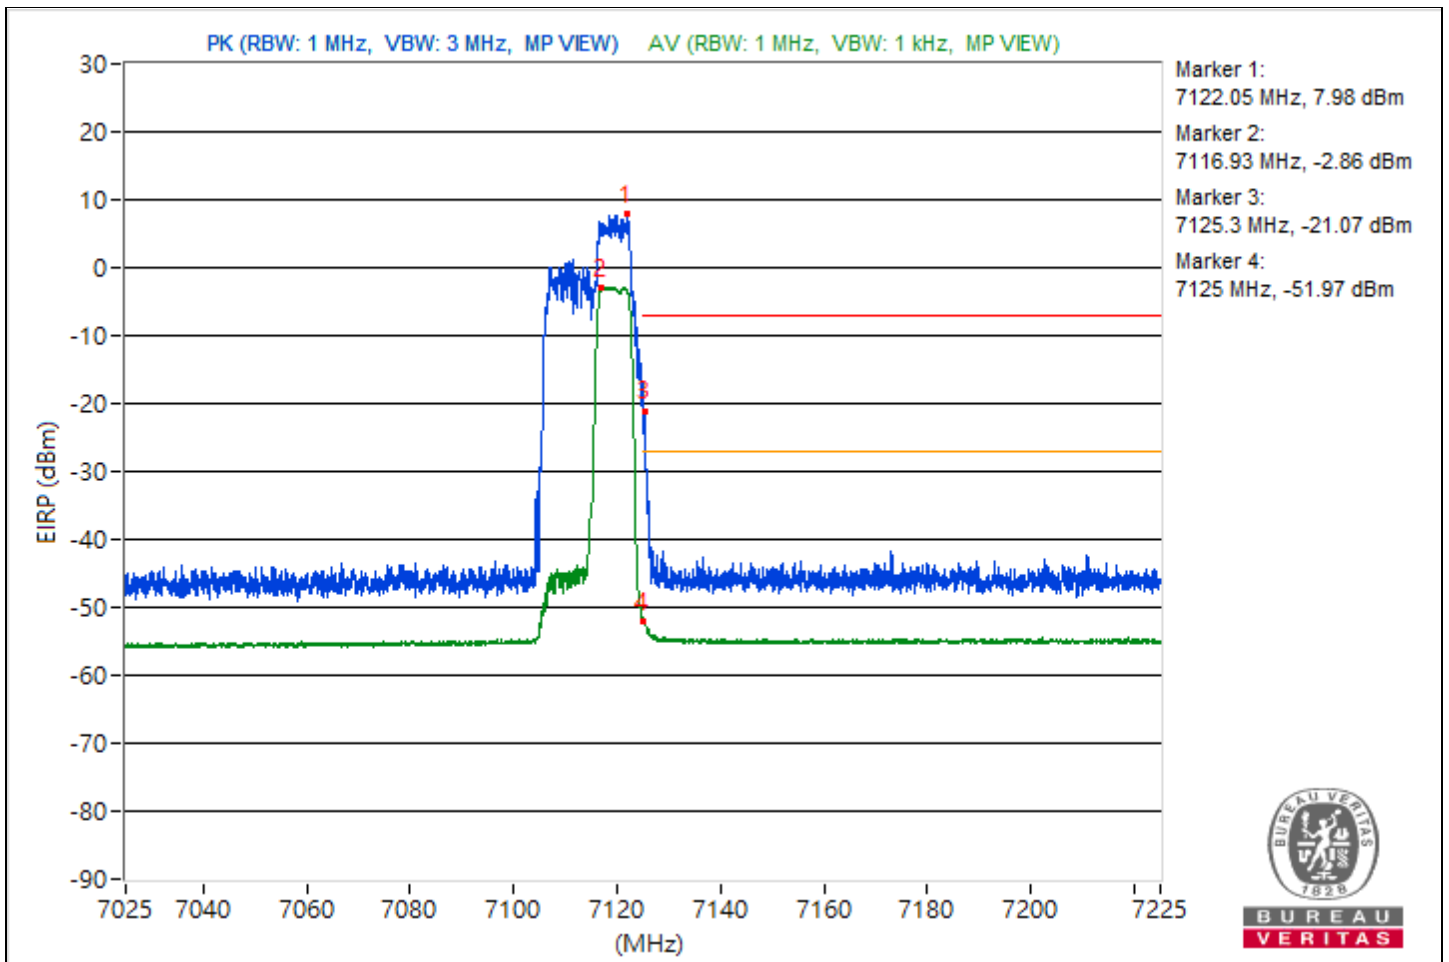


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.9	102.31 PK			2.29	4.76	7.05
2	*5954.18	91.83 AV			-8.19	4.76	-3.43
3	#5841.52	64.19 PK	88.26	-24.07	-35.83	4.76	-31.07
4	#5898.82	51.47 AV	68.26	-16.79	-48.55	4.76	-43.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

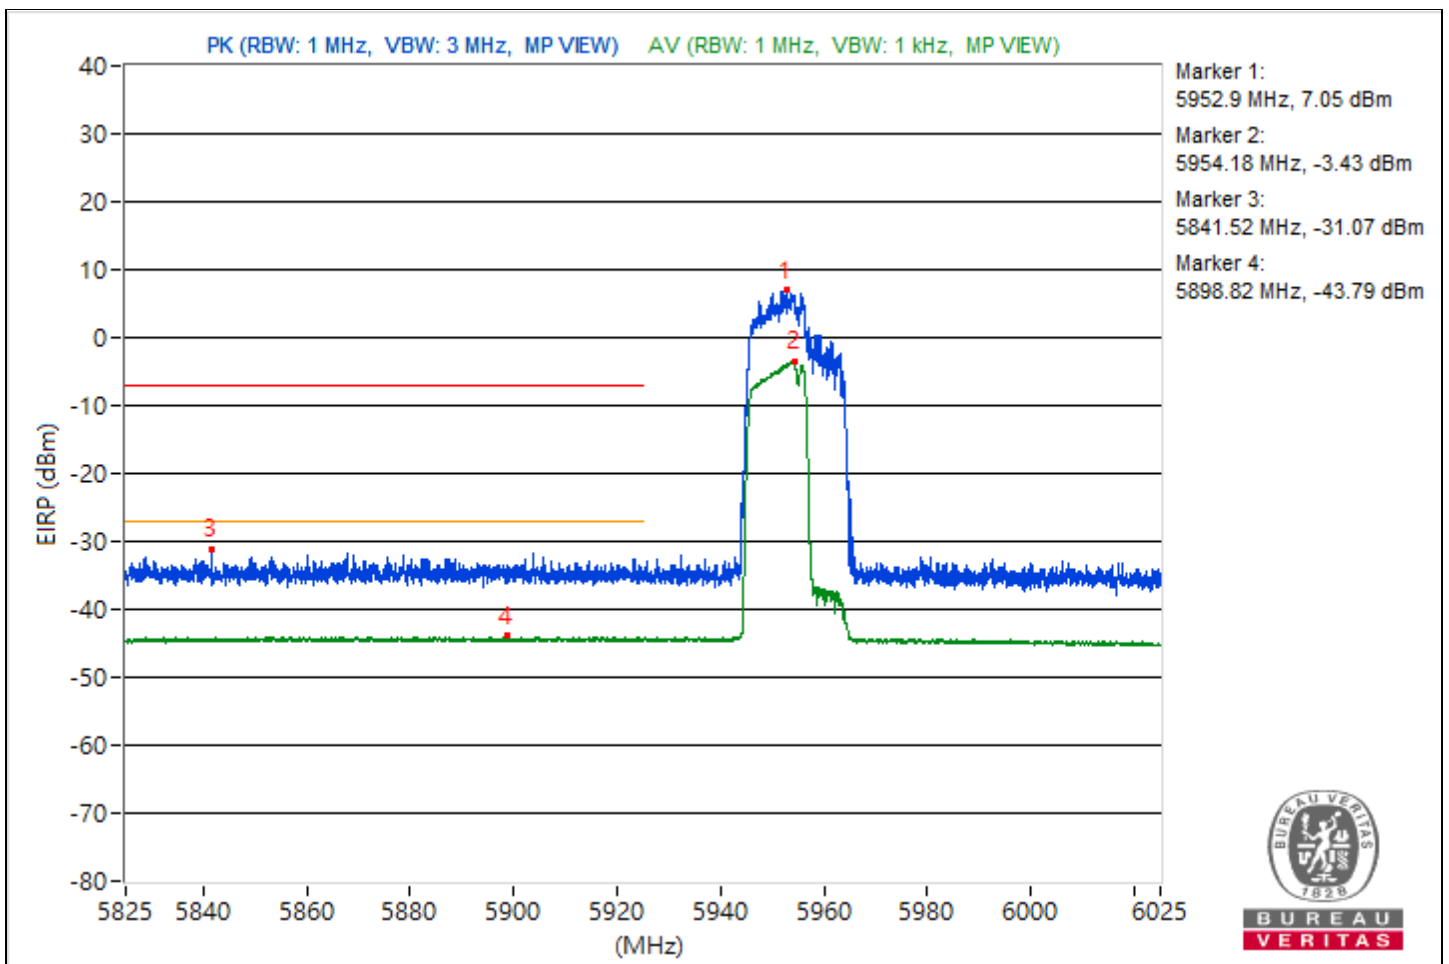


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	58.35 PK	88.2	-29.85	-41	4.09	-36.91
2	#7125	44.48 AV	68.2	-23.72	-54.87	4.09	-50.78

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

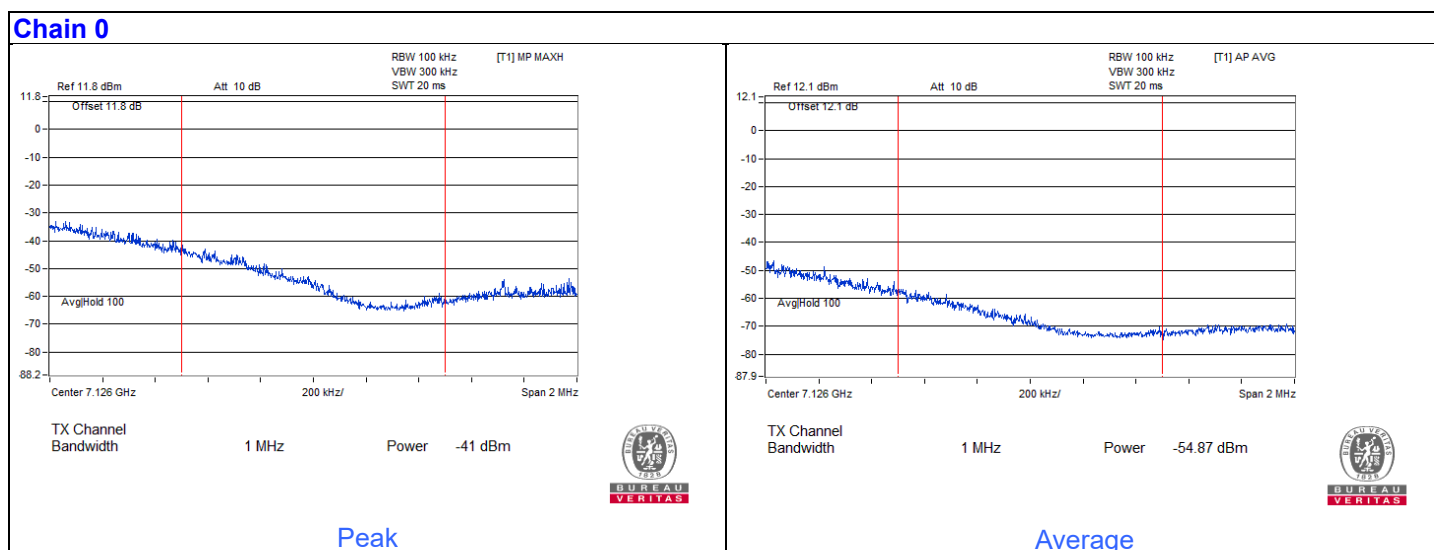


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5981.82	102.7 PK			2.68	4.76	7.44
2	*5986.73	91.23 AV			-8.79	4.76	-4.03
3	#5924.7	63.51 PK	88.26	-24.75	-36.51	4.76	-31.75
4	#5922.73	51.41 AV	68.26	-16.85	-48.61	4.76	-43.85

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

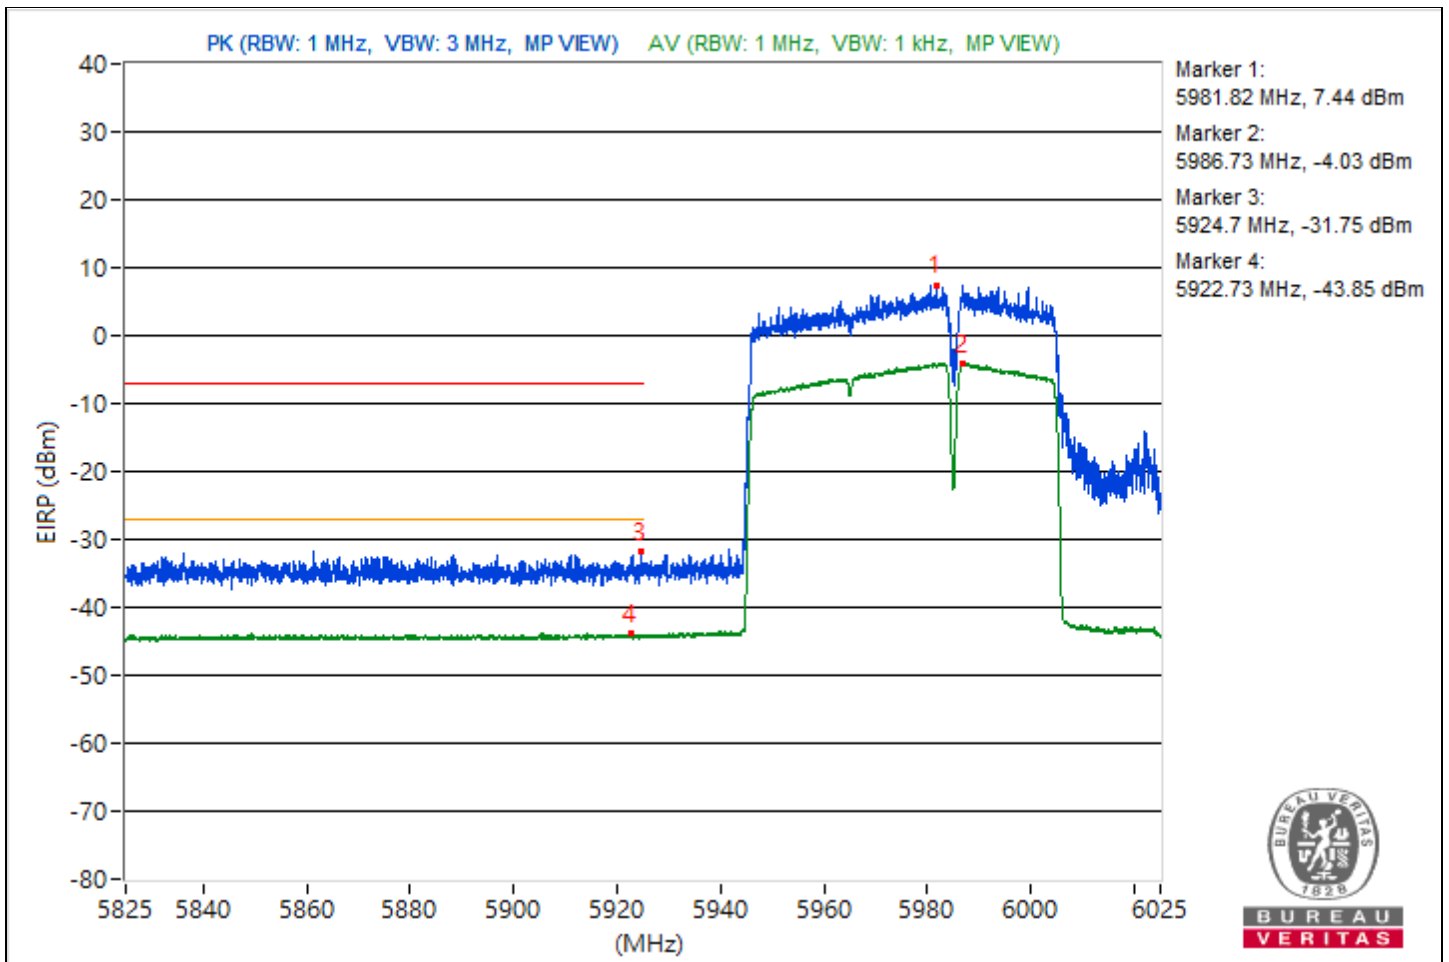


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.52	103.64 PK			4.29	4.09	8.38
2	*7027.95	91.88 AV			-7.47	4.09	-3.38
3	#7145.75	53.62 PK	88.26	-34.64	-45.73	4.09	-41.64
4	#7127	42.23 AV	68.26	-26.03	-57.12	4.09	-53.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

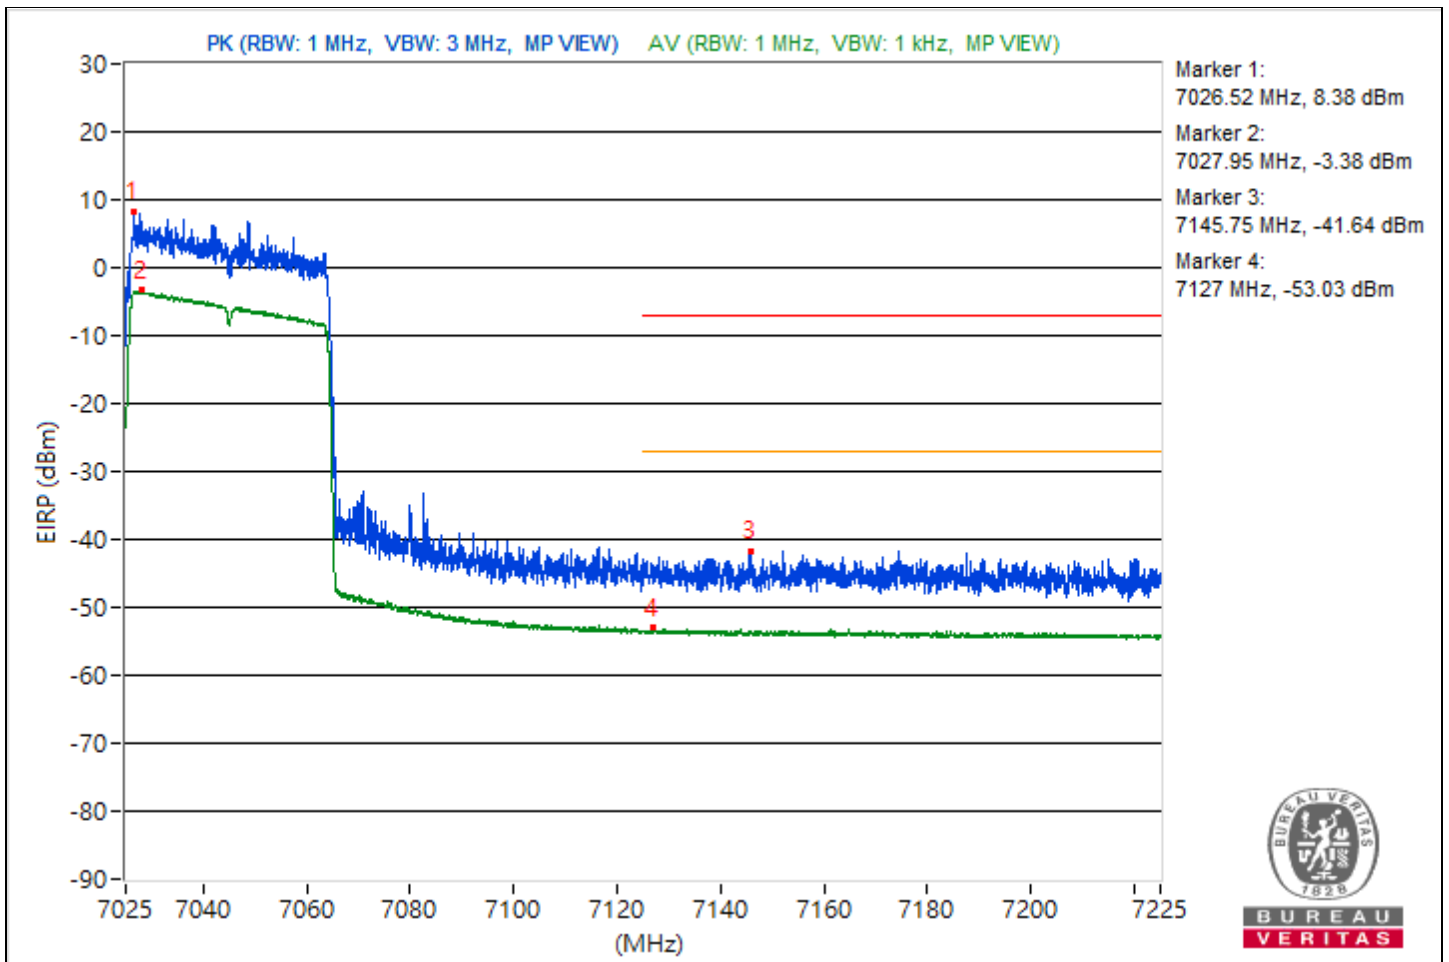


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6016.95	102.32 PK			2.3	4.76	7.06
2	*6022.37	90.98 AV			-9.04	4.76	-4.28
3	#5891.25	64.45 PK	88.26	-23.81	-35.57	4.76	-30.81
4	#5924.98	52.49 AV	68.26	-15.77	-47.53	4.76	-42.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

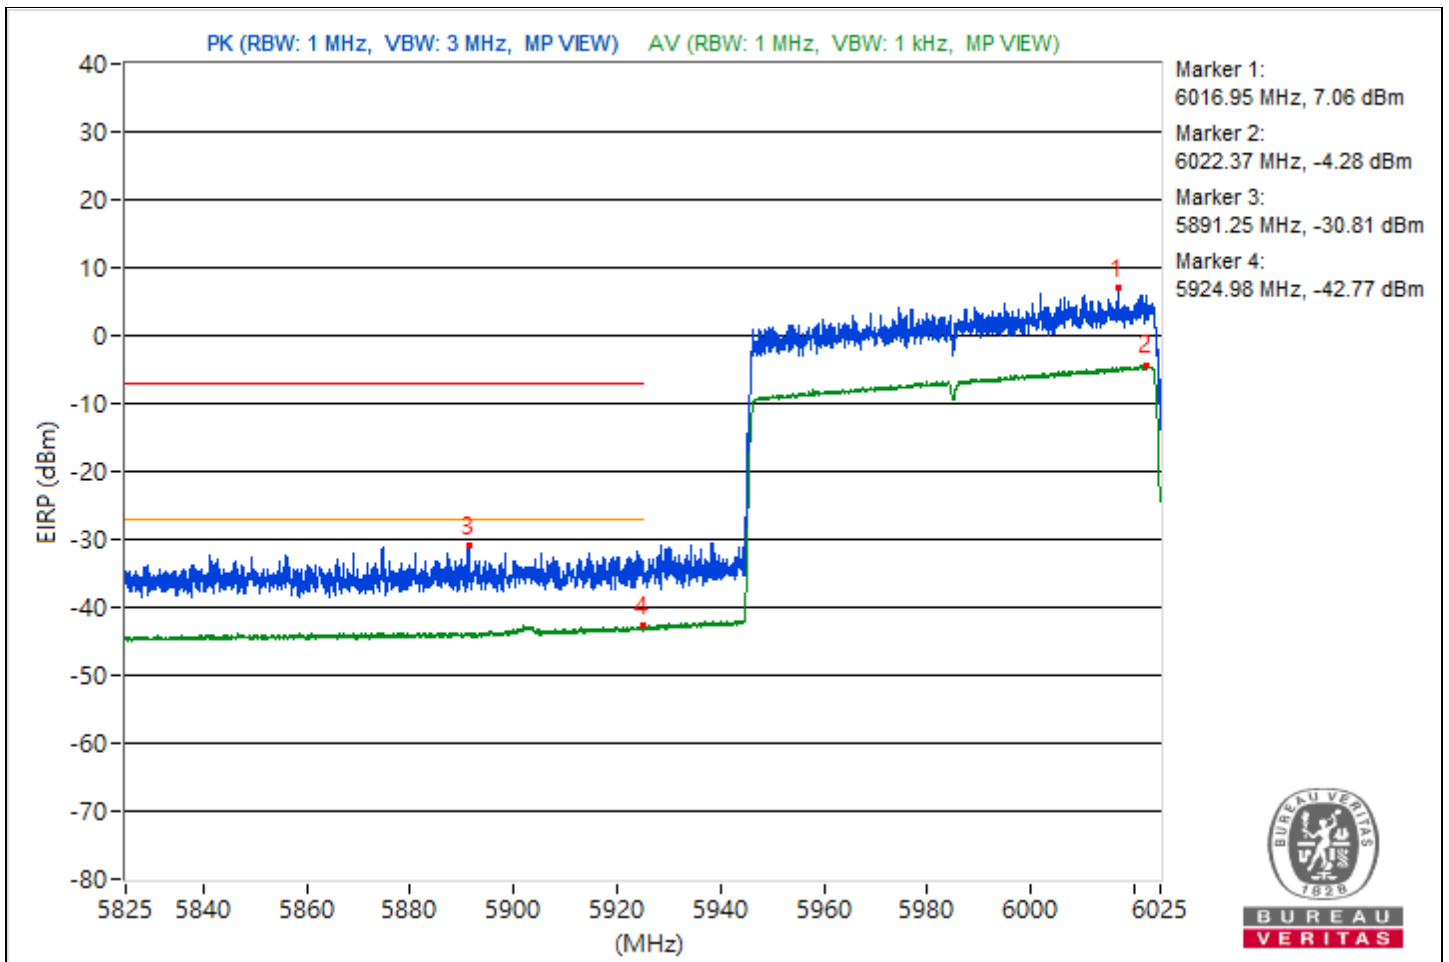


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7045.6	100.36 PK			1.01	4.09	5.1
2	*7026.5	89.21 AV			-10.14	4.09	-6.05
3	#7134.02	59.29 PK	88.26	-28.97	-40.06	4.09	-35.97
4	#7125.45	45.53 AV	68.26	-22.73	-53.82	4.09	-49.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

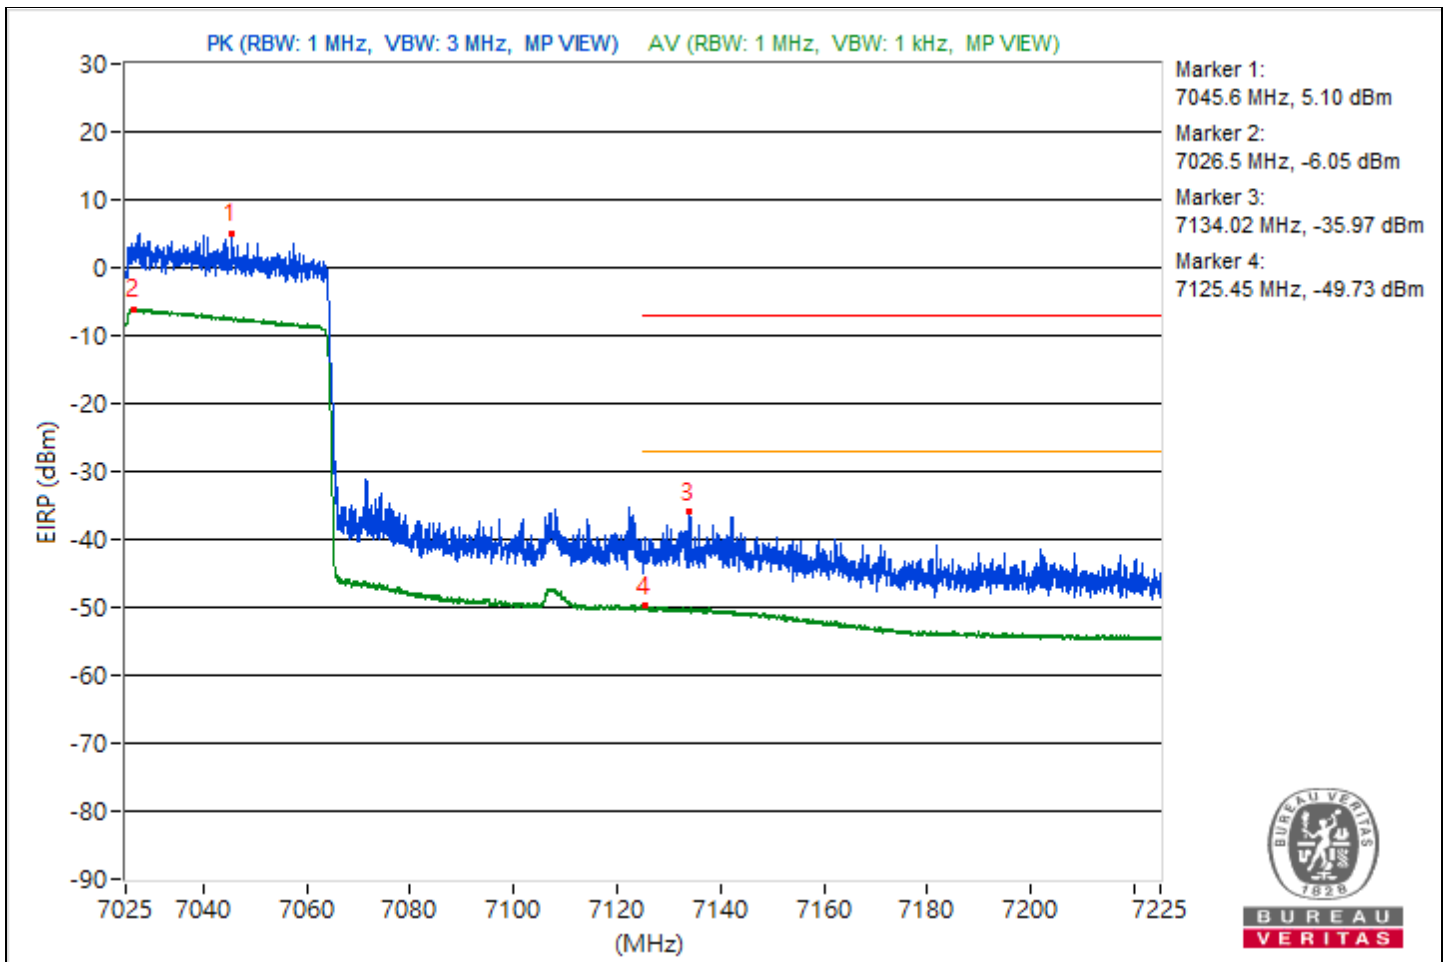


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6016.85	101.52 PK			1.5	4.76	6.26
2	*6023.45	90.88 AV			-9.14	4.76	-4.38
3	#5904.5	64 PK	88.26	-24.26	-36.02	4.76	-31.26
4	#5921.9	52.93 AV	68.26	-15.33	-47.09	4.76	-42.33

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

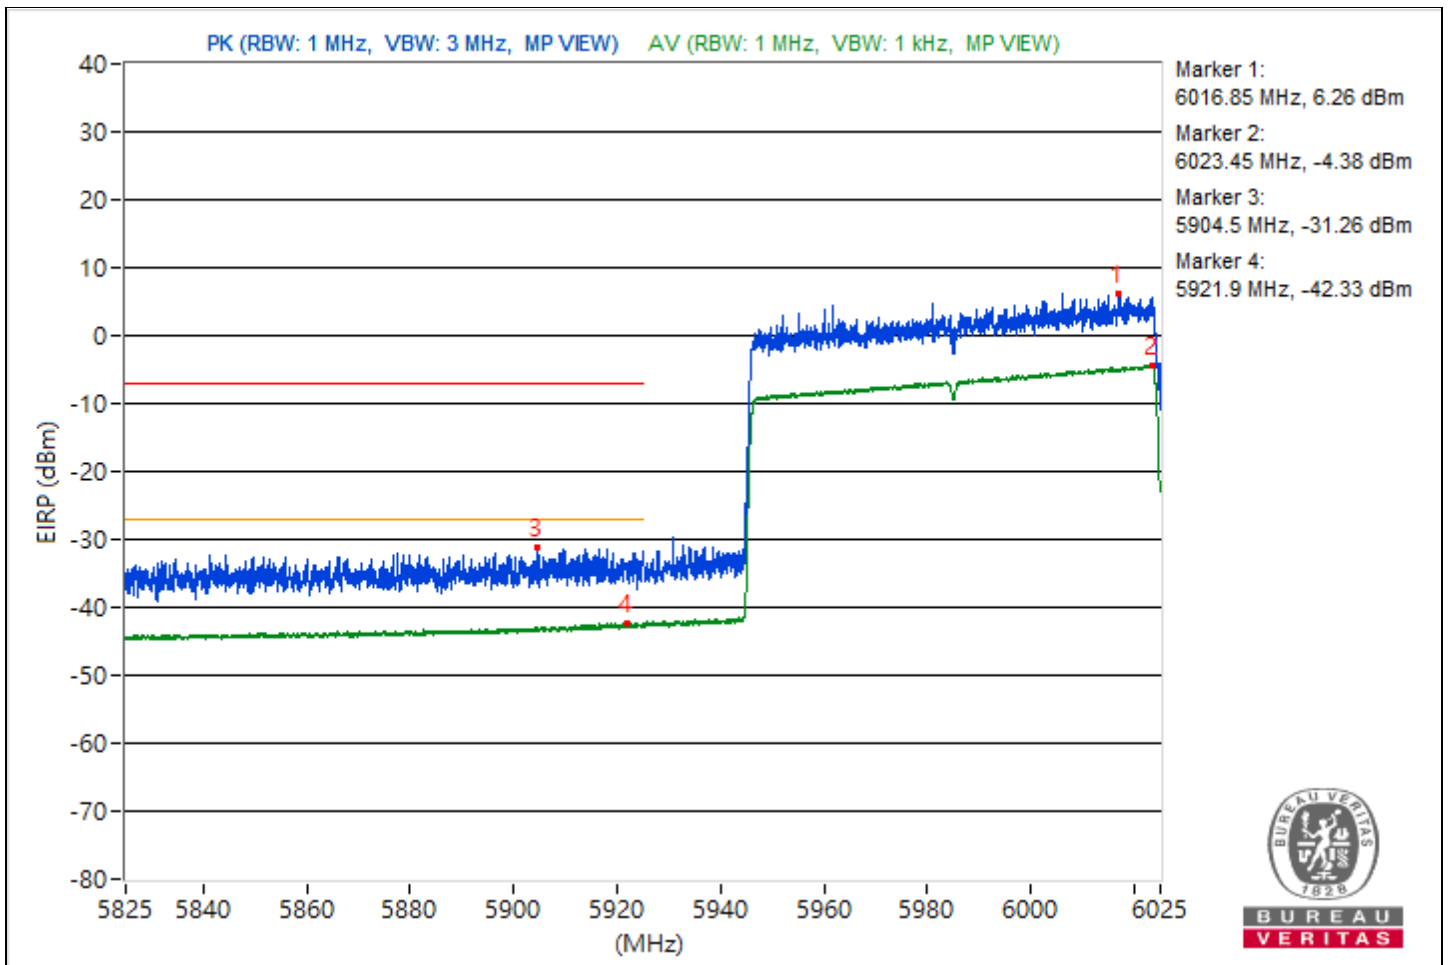


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7049.4	99.79 PK			0.44	4.09	4.53
2	*7027.57	89.33 AV			-10.02	4.09	-5.93
3	#7153.12	63.25 PK	88.26	-25.01	-36.1	4.09	-32.01
4	#7128.7	47.59 AV	68.26	-20.67	-51.76	4.09	-47.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

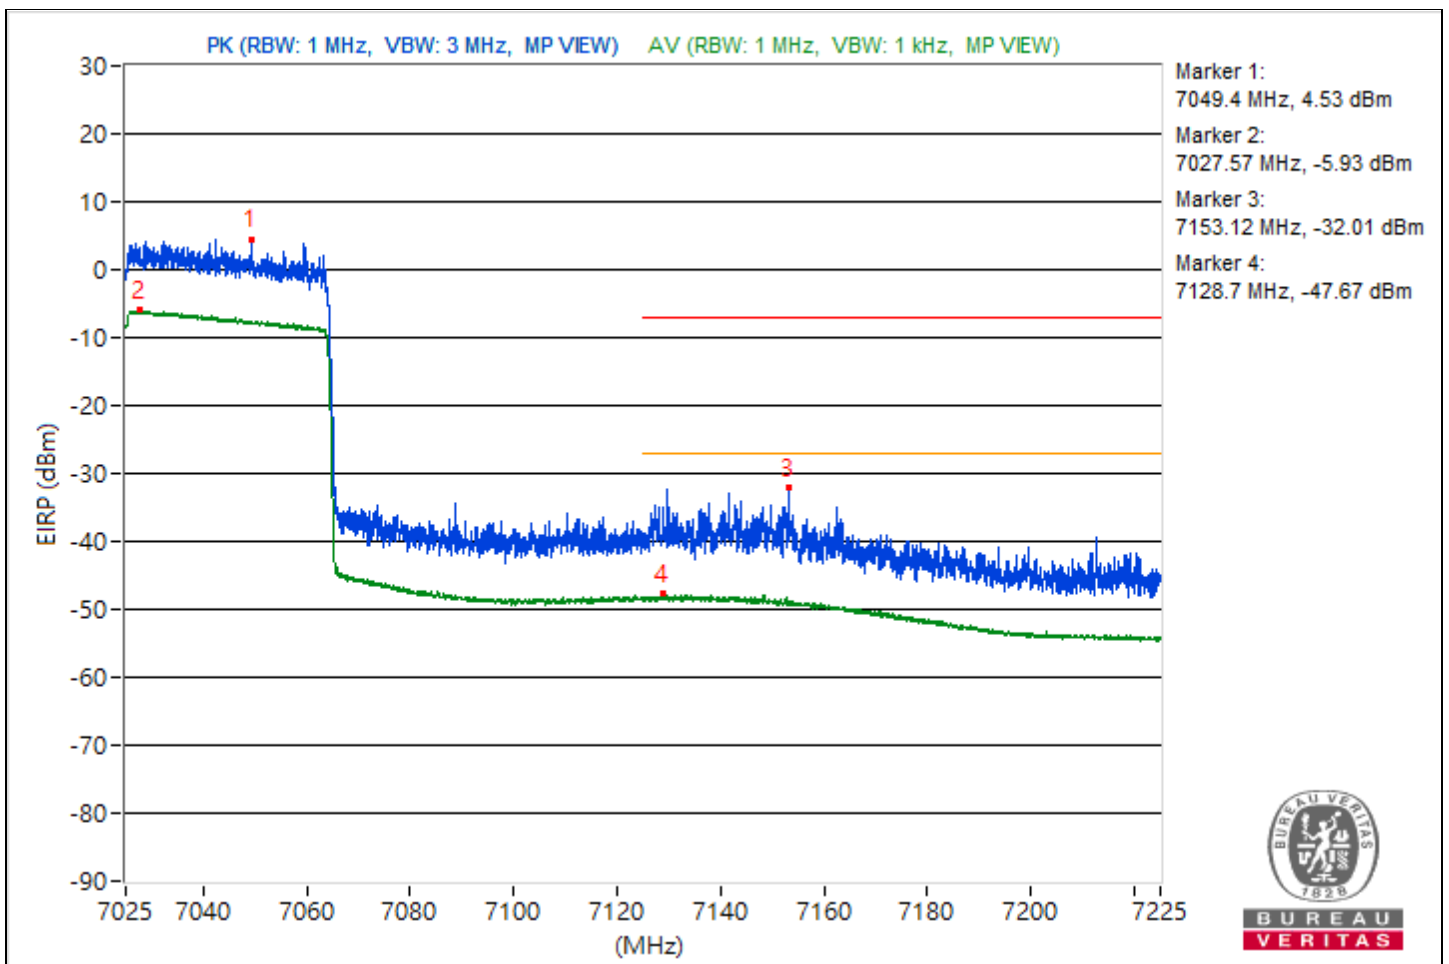


For 2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.87	49.79 PK	74	-24.21	-61.58	-54.12	7.93	-45.47
2	3791.44	39.59 AV	54	-14.41	-67.67	-65.75	7.93	-55.67
3	14490.84	48.09 PK	74	-25.91	-55.88	-62.95	7.93	-47.17
4	14479.82	37.96 AV	54	-16.04	-68.3	-68.19	7.93	-57.3
5	18747	50.66 PK	74	-23.34	-58.13	-53.93	7.93	-44.6
6	21122.1	39.27 AV	54	-14.73	-66.13	-67.91	7.93	-55.99
7	23920.8	51.76 PK	74	-22.24	-58.1	-52.49	7.93	-43.5
8	23855.6	41.13 AV	54	-12.87	-66.05	-64.27	7.93	-54.13
9	39937.78	44.55 PK	74	-29.45	-68.59	-59.11	7.93	-50.71
10	38861.6	34.36 AV	54	-19.64	-71.67	-72.02	7.93	-60.9

Note: Margin value = Emission Level - Limit value

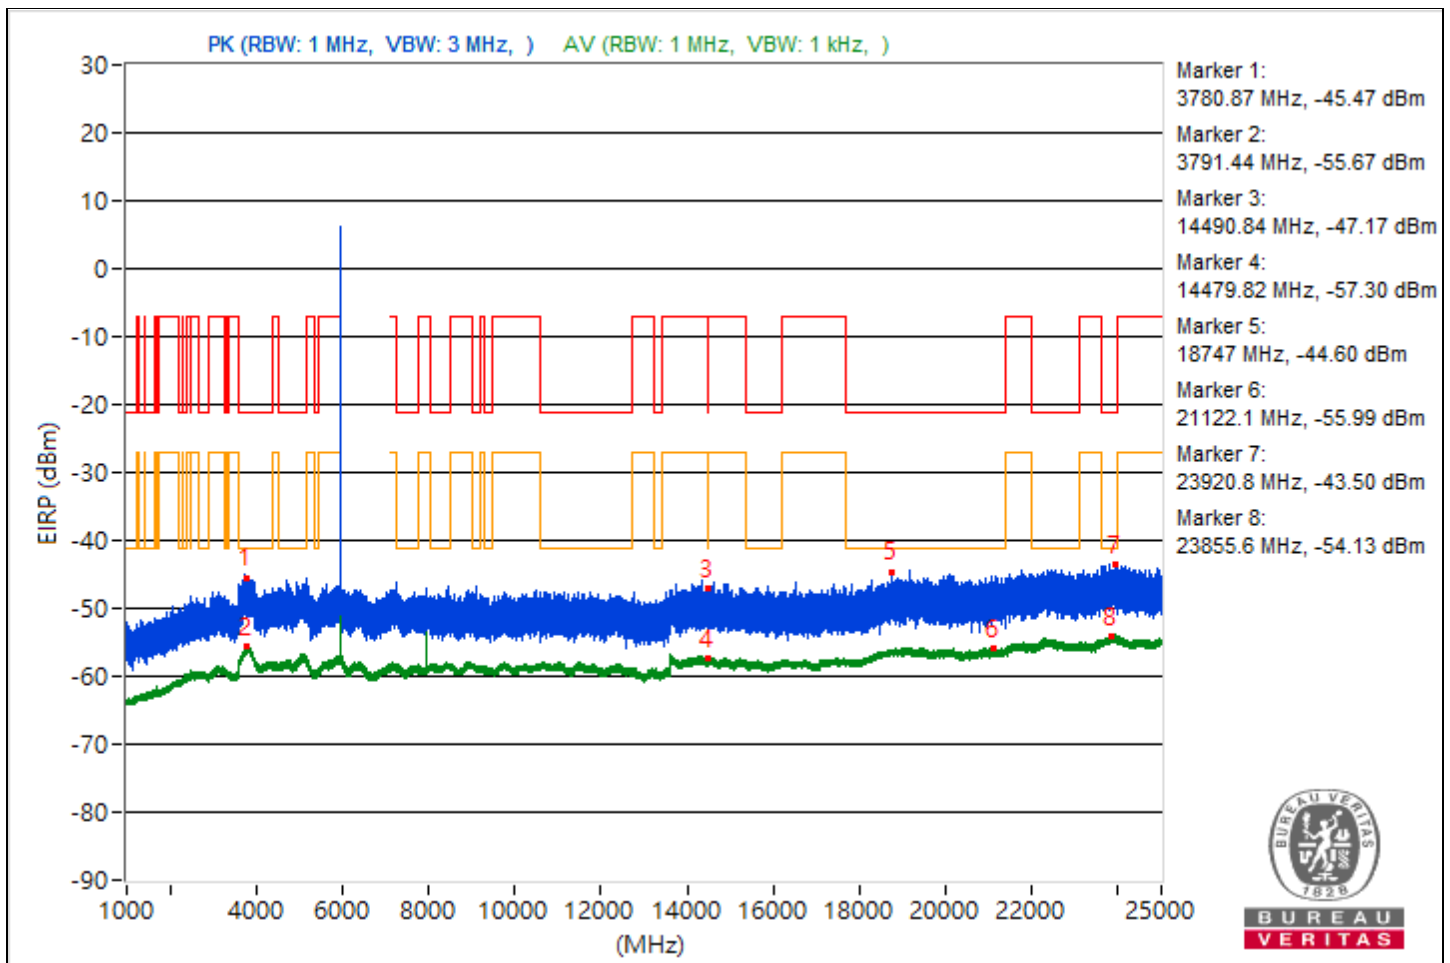

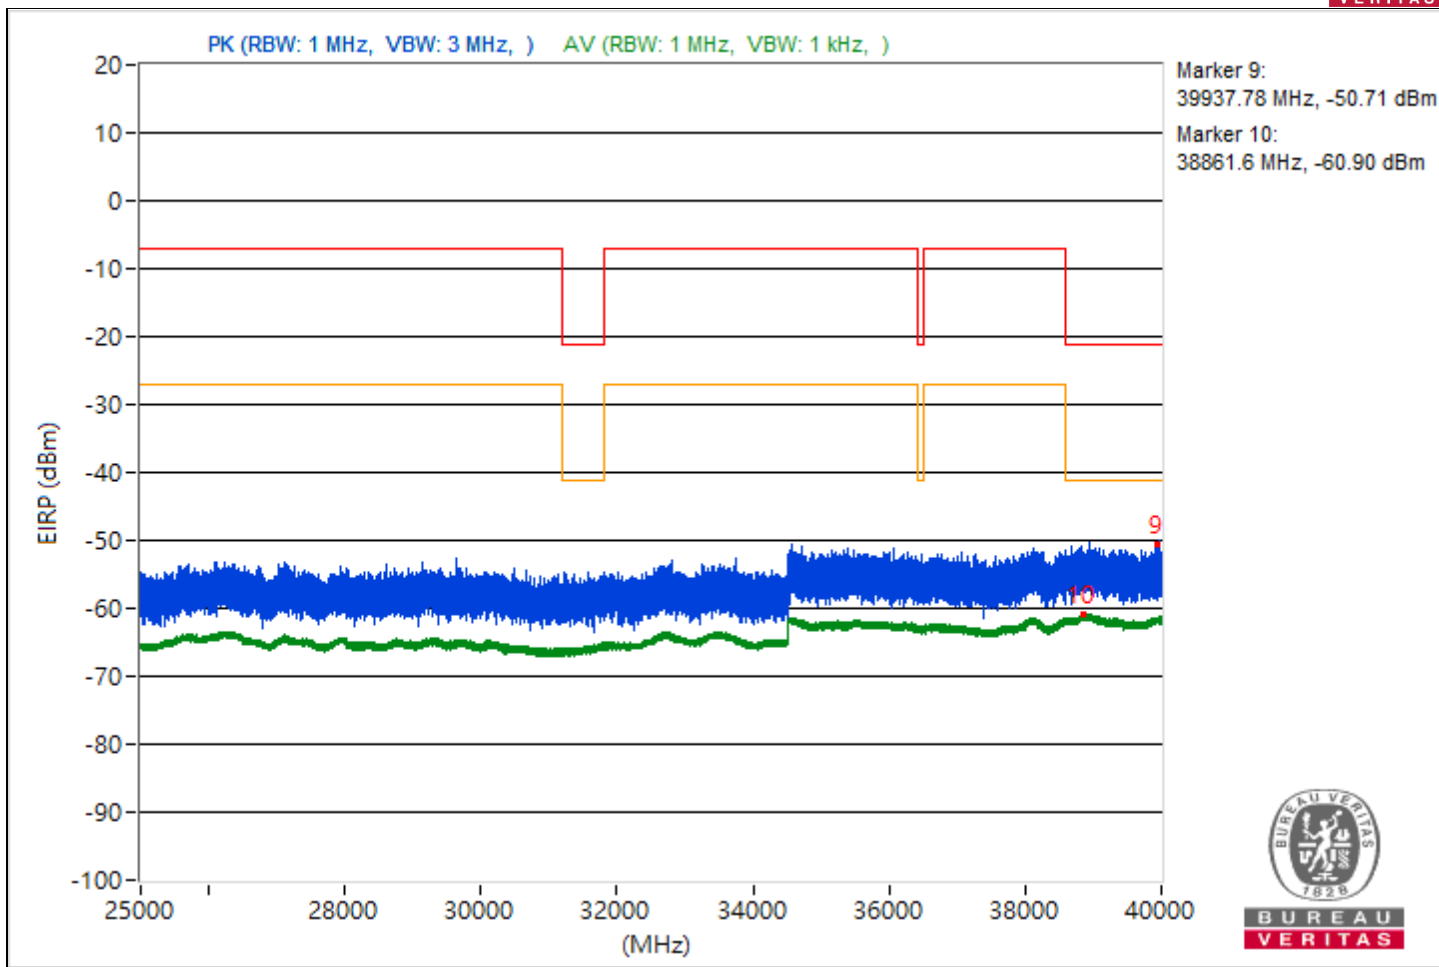





RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.58	51.28 PK	74	-22.72	-57.45	-53.33	7.93	-43.98
2	3820.14	39.64 AV	54	-14.36	-67.81	-65.58	7.93	-55.62
3	7739.83	48.45 PK	74	-25.55	-60.54	-56.06	7.93	-46.81
4	8233.33	40.04 AV	54	-13.96	-64.36	-69.3	7.93	-55.22
5	21206.2	50.09 PK	74	-23.91	-59.33	-54.29	7.93	-45.17
6	19477.3	39.35 AV	54	-14.65	-67.37	-66.38	7.93	-55.91
7	23970.4	52.42 PK	74	-21.58	-58.42	-51.58	7.93	-42.84
8	23863.4	41.27 AV	54	-12.73	-65.81	-64.2	7.93	-53.99
9	38833.51	44.98 PK	74	-29.02	-59.82	-63.3	7.93	-50.28
10	38835.38	34.41 AV	54	-19.59	-71.33	-72.3	7.93	-60.85

Note: Margin value = Emission Level - Limit value

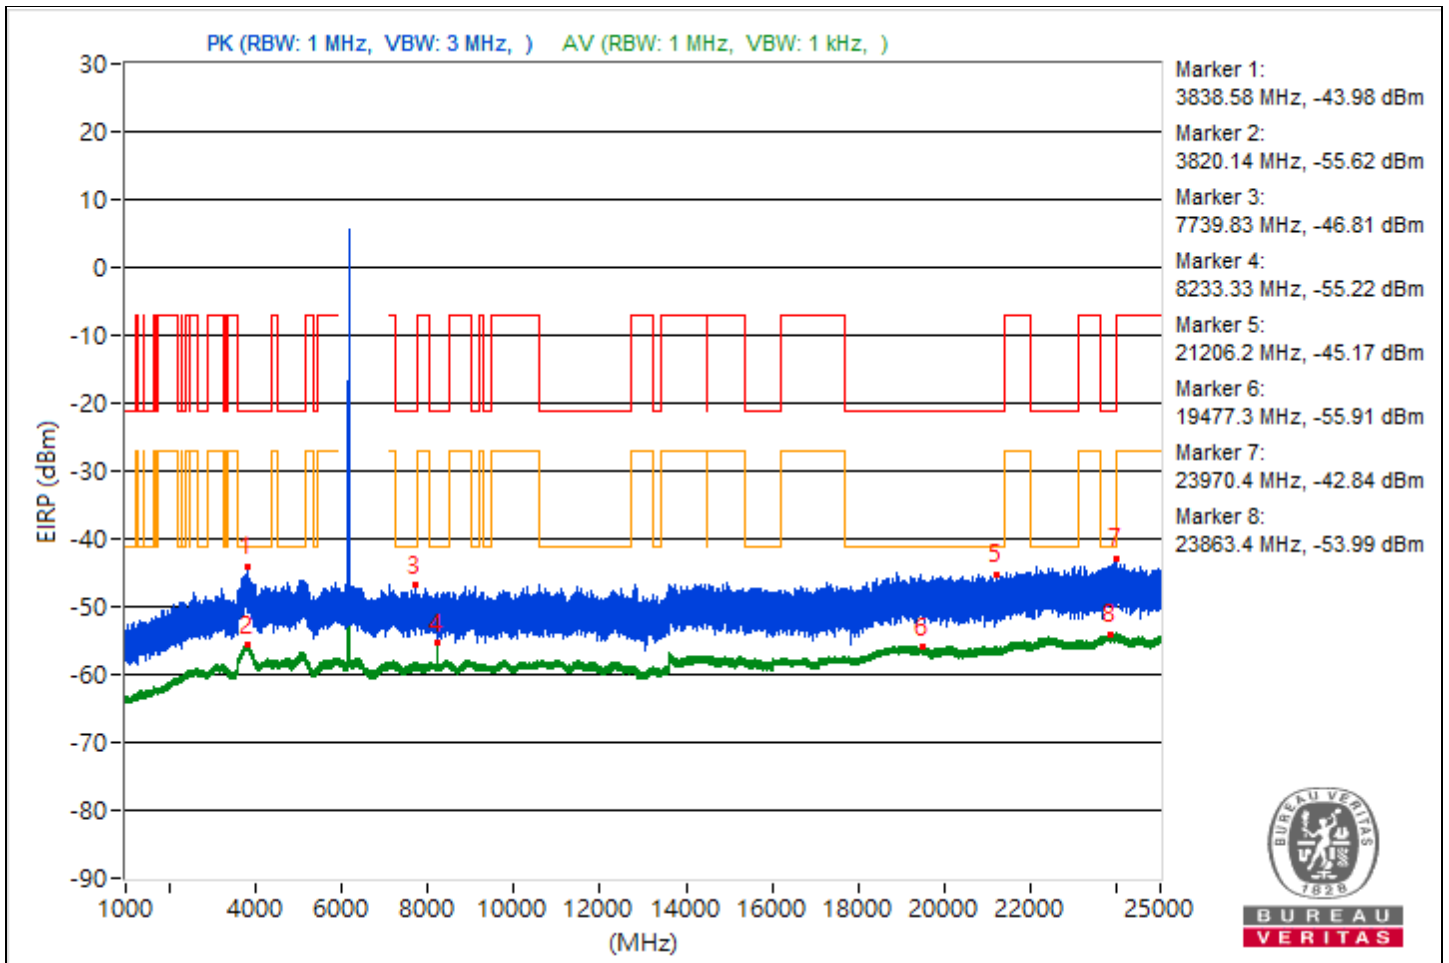

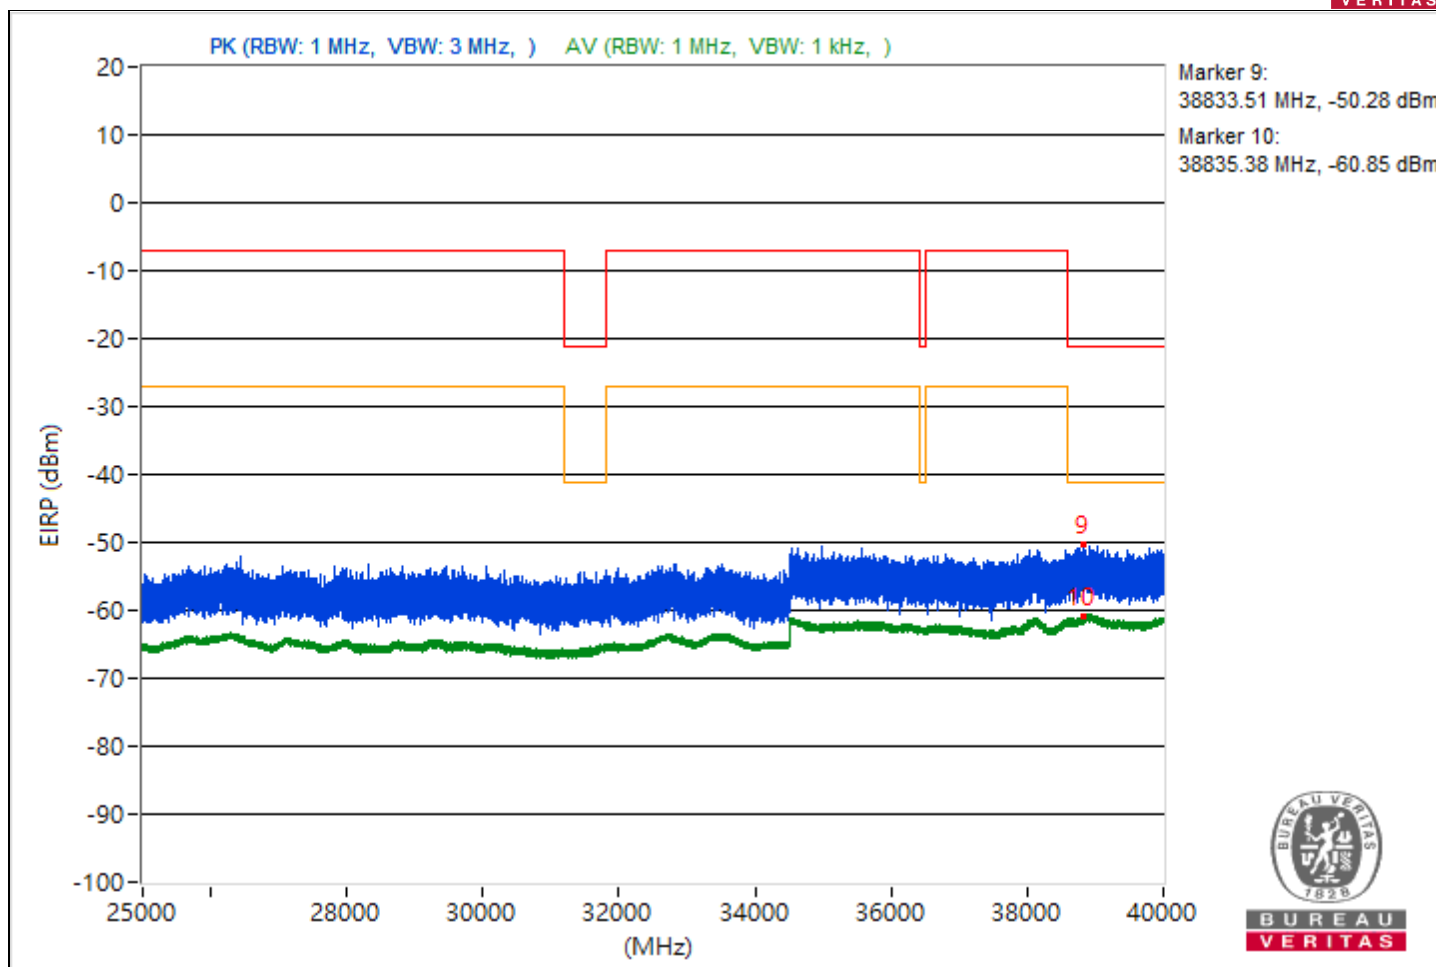





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.78	49.82 PK	74	-24.18	-60.57	-54.28	7.93	-45.44
2	3812.37	39.63 AV	54	-14.37	-67.94	-65.53	7.93	-55.63
3	9480.53	48.42 PK	74	-25.58	-56.37	-59.9	7.93	-46.84
4	14486.58	37.91 AV	54	-16.09	-68.24	-68.35	7.93	-57.35
5	19802.8	49.87 PK	74	-24.13	-59.52	-54.5	7.93	-45.39
6	19484.8	39.22 AV	54	-14.78	-67.68	-66.37	7.93	-56.04
7	22331.3	51.72 PK	74	-22.28	-52.46	-58.38	7.93	-43.54
8	23857.5	41.28 AV	54	-12.72	-65.79	-64.2	7.93	-53.98
9	38914.49	45.22 PK	74	-28.78	-63.69	-59.32	7.93	-50.04
10	39973.96	34.25 AV	54	-19.75	-74.34	-70.42	7.93	-61.01

Note: Margin value = Emission Level - Limit value

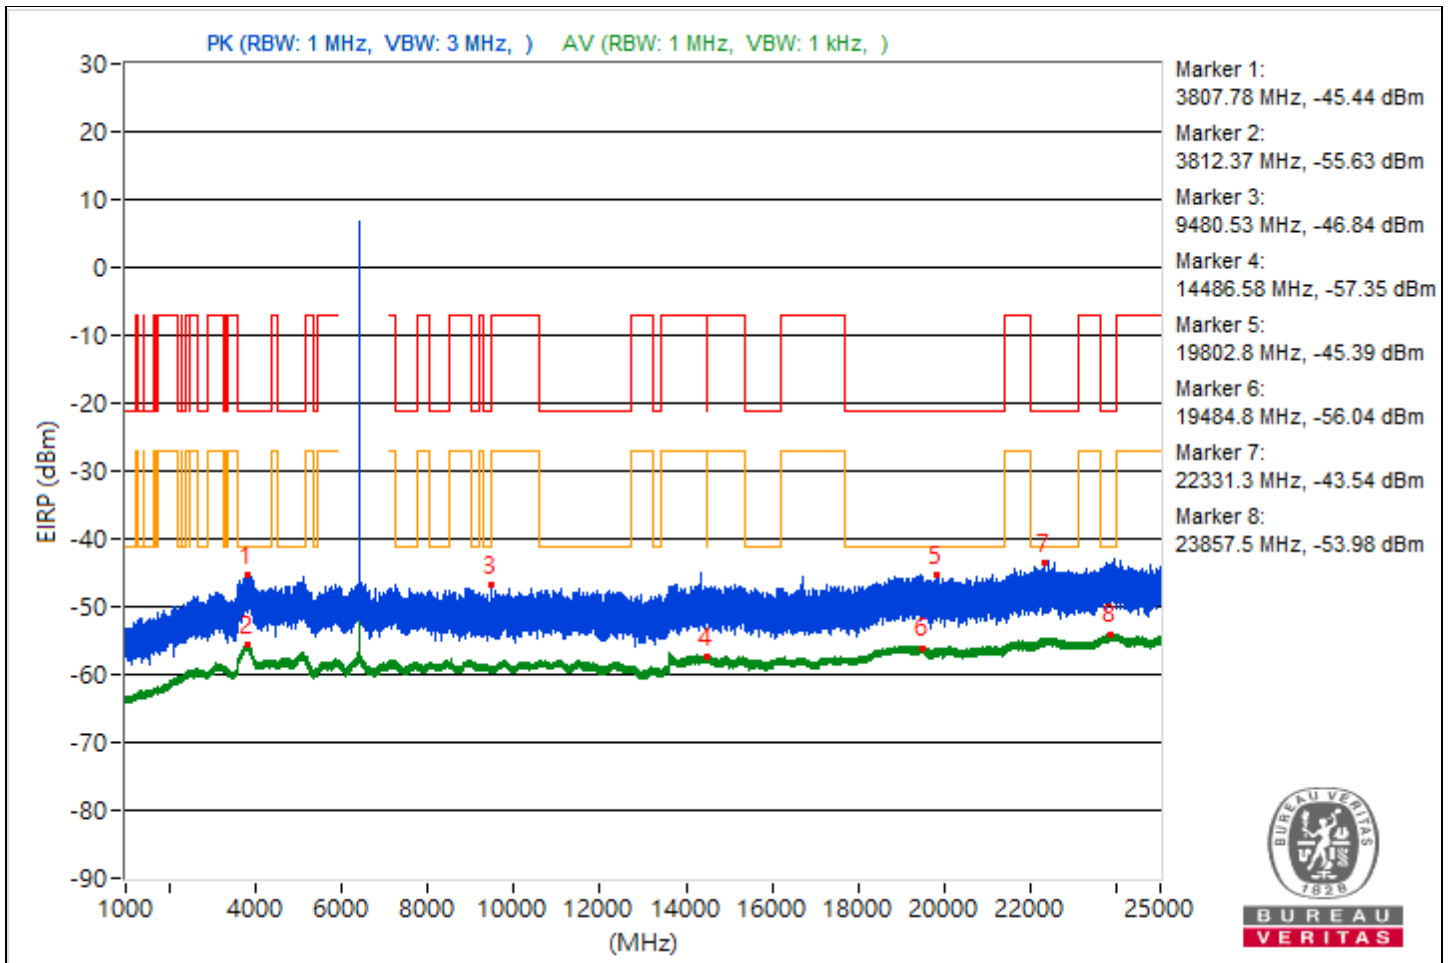

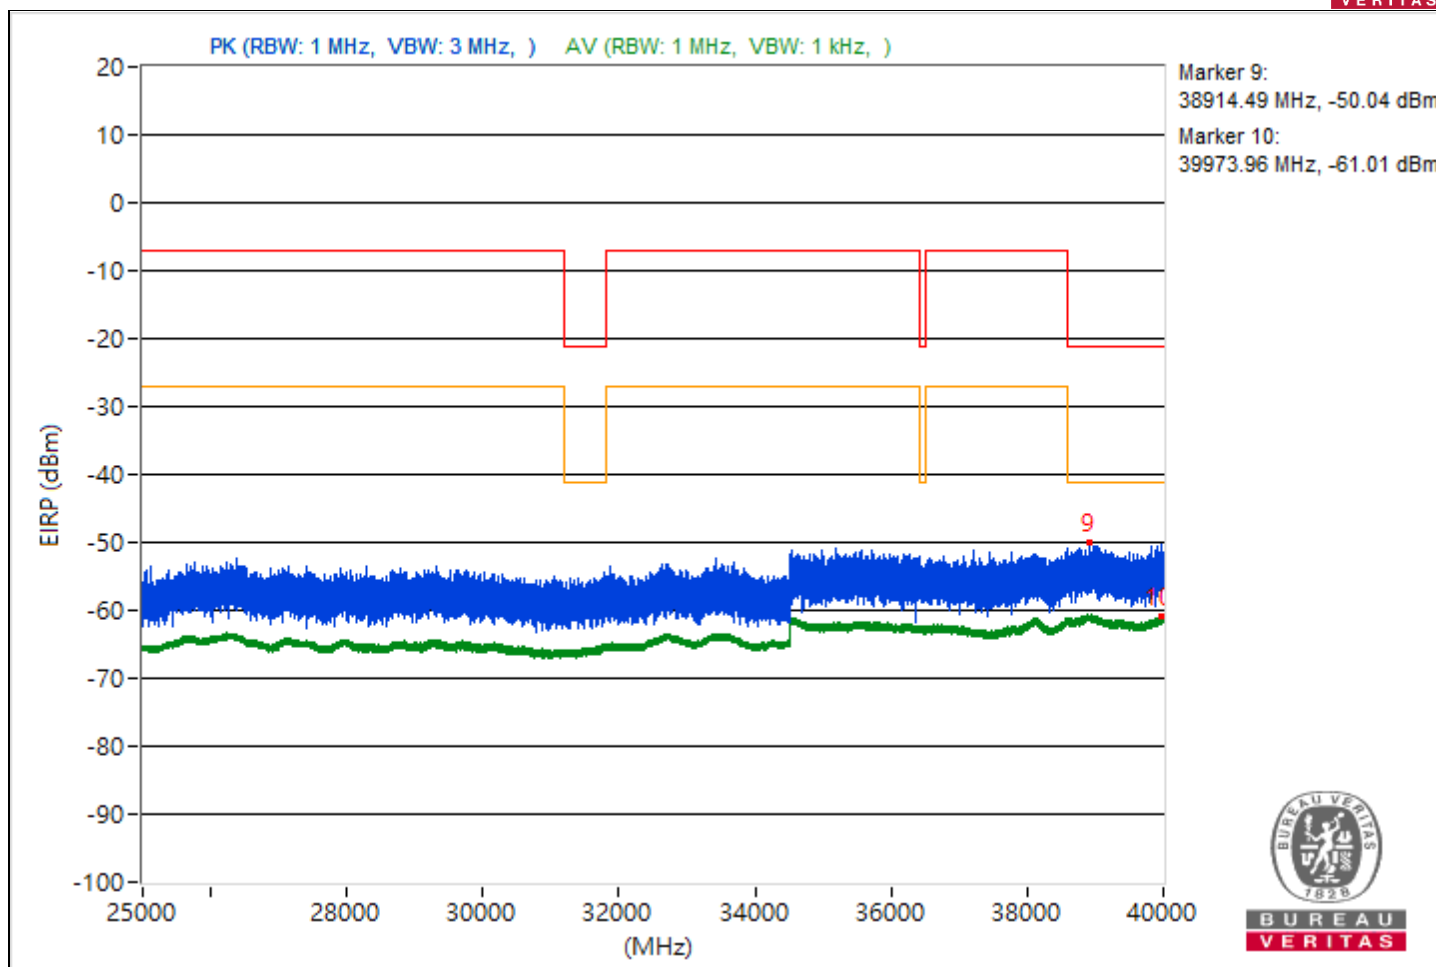





RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.31	50.54 PK	74	-23.46	-60.81	-53.37	7.93	-44.72
2	3830.64	39.54 AV	54	-14.46	-68.16	-65.54	7.93	-55.72
3	14478.76	48.8 PK	74	-25.2	-61.77	-55.27	7.93	-46.46
4	14482.67	37.67 AV	54	-16.33	-69.28	-67.9	7.93	-57.59
5	19081.3	50.13 PK	74	-23.87	-59.37	-54.21	7.93	-45.13
6	19491.4	39.37 AV	54	-14.63	-67.36	-66.36	7.93	-55.89
7	22755.3	51.12 PK	74	-22.88	-59.35	-52.97	7.93	-44.14
8	23830.5	41.28 AV	54	-12.72	-65.04	-64.81	7.93	-53.98
9	39303.38	44.95 PK	74	-29.05	-65.82	-59.08	7.93	-50.31
10	39997.24	34.11 AV	54	-19.89	-74.38	-70.59	7.93	-61.15

Note: Margin value = Emission Level - Limit value

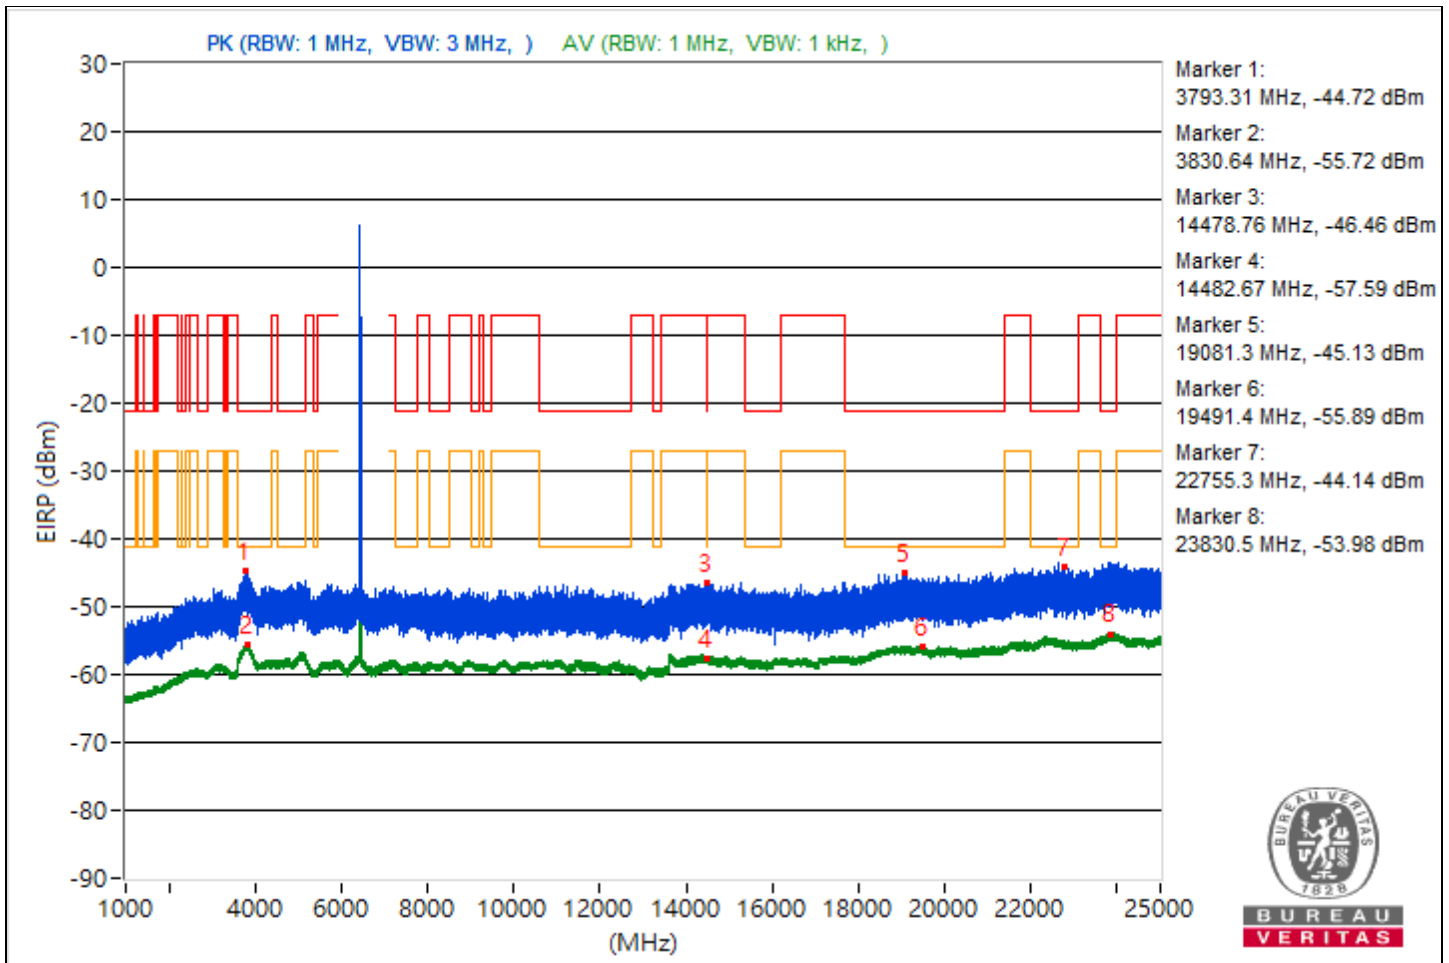

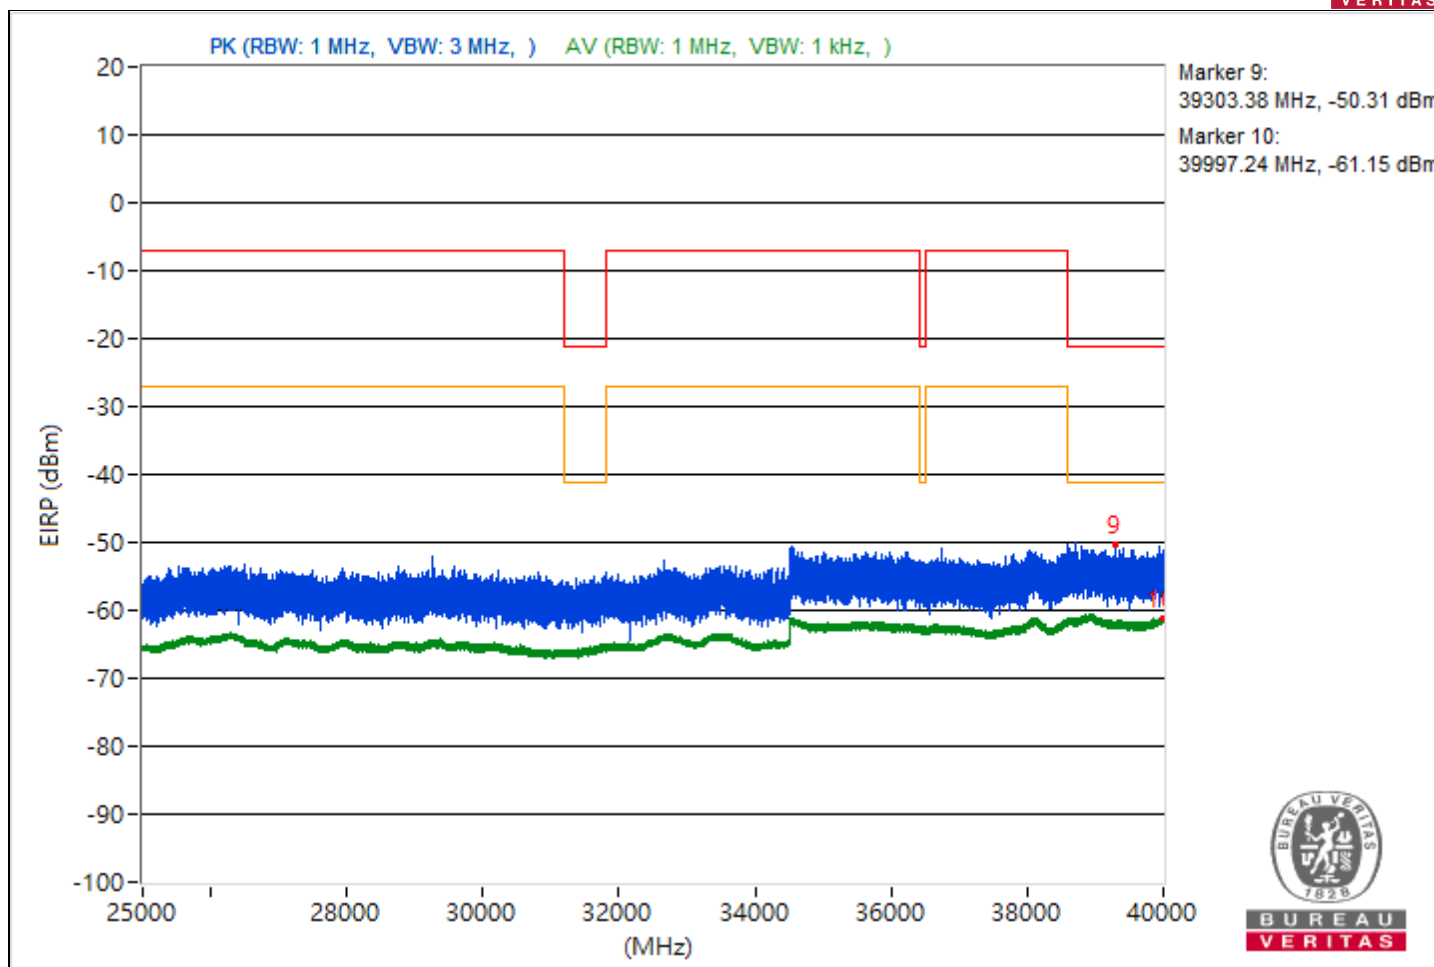





RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.04	50.42 PK	74	-23.58	-60.1	-53.66	7.93	-44.84
2	3822.94	39.78 AV	54	-14.22	-67.78	-65.39	7.93	-55.48
3	7265.08	48.32 PK	74	-25.68	-56.13	-60.86	7.93	-46.94
4	14487.02	37.72 AV	54	-16.28	-68.29	-68.68	7.93	-57.54
5	20990.6	50.04 PK	74	-23.96	-59.15	-54.4	7.93	-45.22
6	19461.7	39.51 AV	54	-14.49	-67.25	-66.2	7.93	-55.75
7	23795	51.54 PK	74	-22.46	-59.13	-52.51	7.93	-43.72
8	23866.4	41.24 AV	54	-12.76	-65.92	-64.18	7.93	-54.02
9	39146.4	44.03 PK	74	-29.97	-68.81	-59.66	7.93	-51.23
10	38826.04	34.38 AV	54	-19.62	-71.44	-72.24	7.93	-60.88

Note: Margin value = Emission Level - Limit value

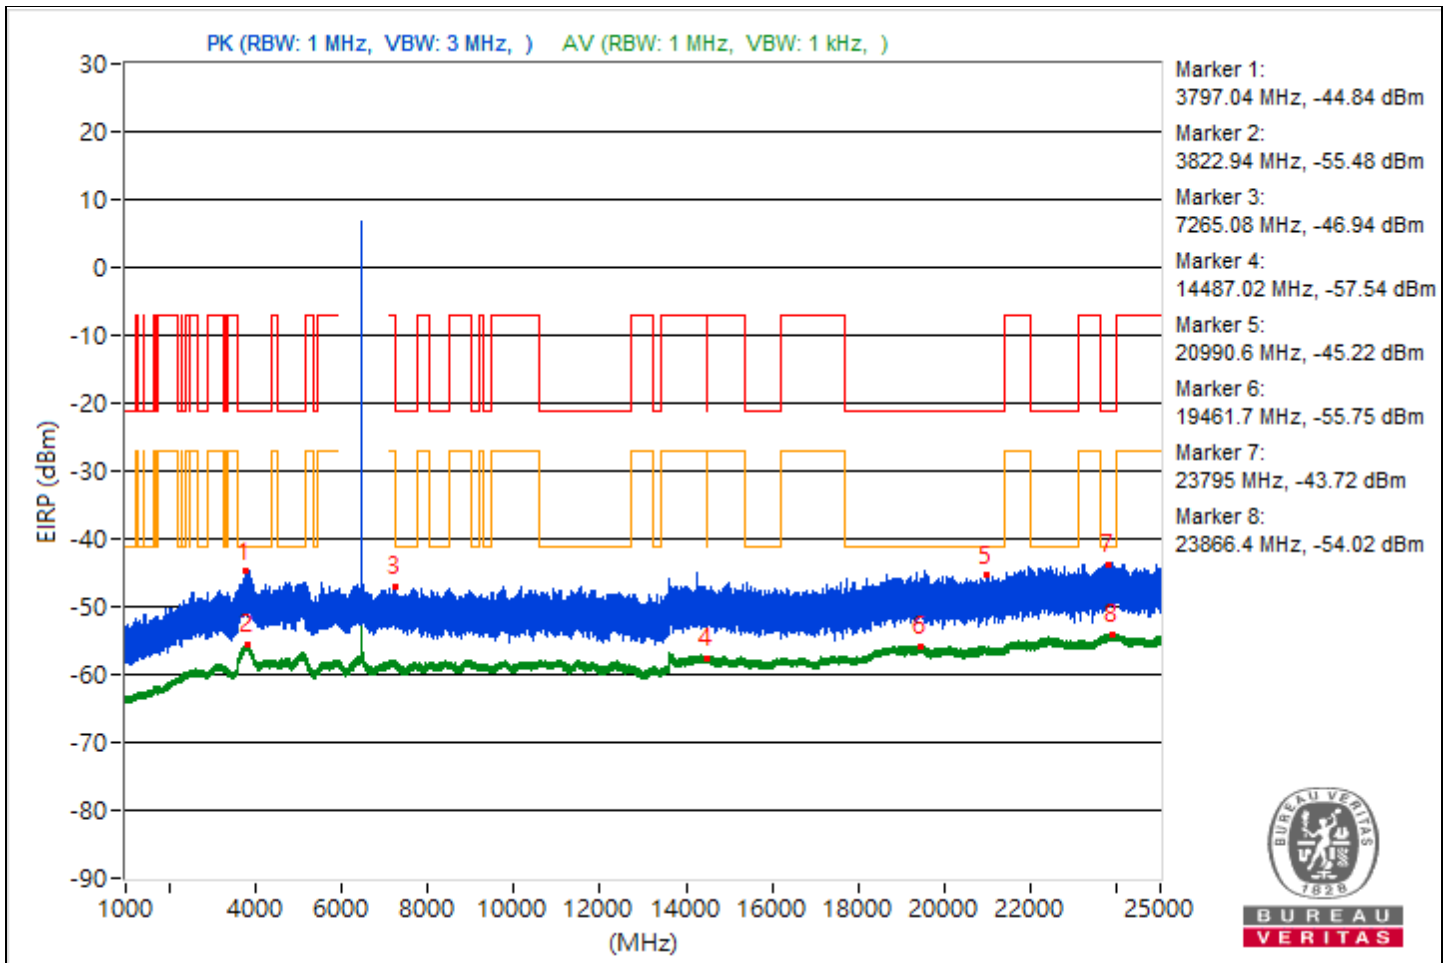

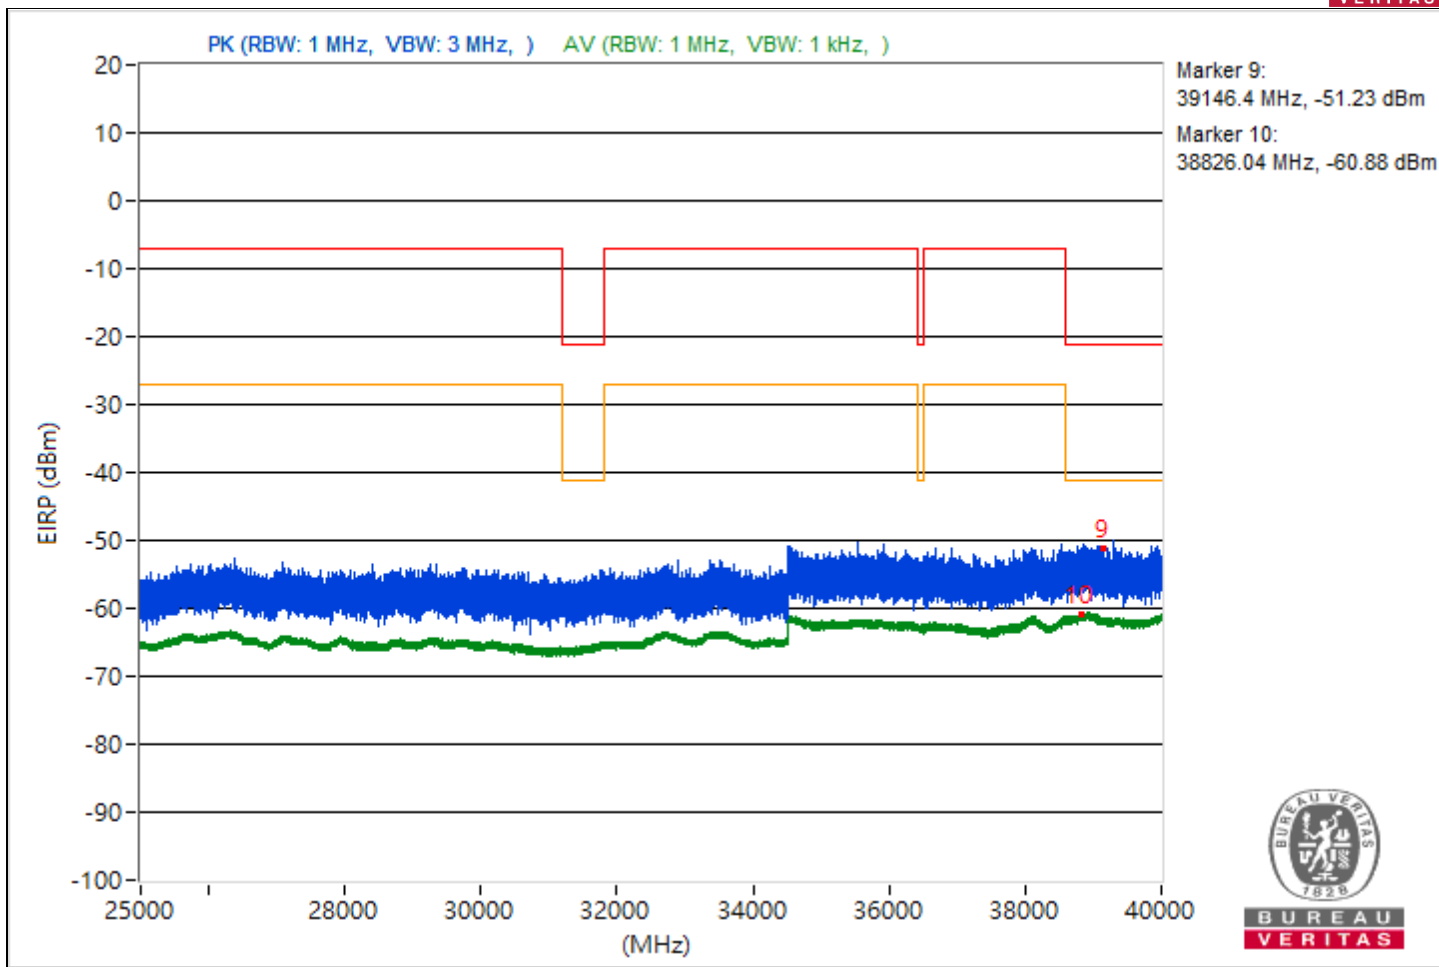





RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3845.27	50.18 PK	74	-23.82	-60.44	-53.88	7.93	-45.08
2	3827.38	39.81 AV	54	-14.19	-67.61	-65.45	7.93	-55.45
3	15446.84	48.26 PK	74	-25.74	-55.94	-61.76	7.93	-47
4	14480.71	37.97 AV	54	-16.03	-68.09	-68.37	7.93	-57.29
5	20458.5	49.88 PK	74	-24.12	-60.01	-54.36	7.93	-45.38
6	19425.5	39.39 AV	54	-14.61	-67.54	-66.19	7.93	-55.87
7	23925.8	51.21 PK	74	-22.79	-59.3	-52.86	7.93	-44.05
8	23936.3	41.21 AV	54	-12.79	-66.01	-64.17	7.93	-54.05
9	39004	44.84 PK	74	-29.16	-59.47	-64.81	7.93	-50.42
10	39988.18	34.27 AV	54	-19.73	-74.01	-70.53	7.93	-60.99

Note: Margin value = Emission Level - Limit value

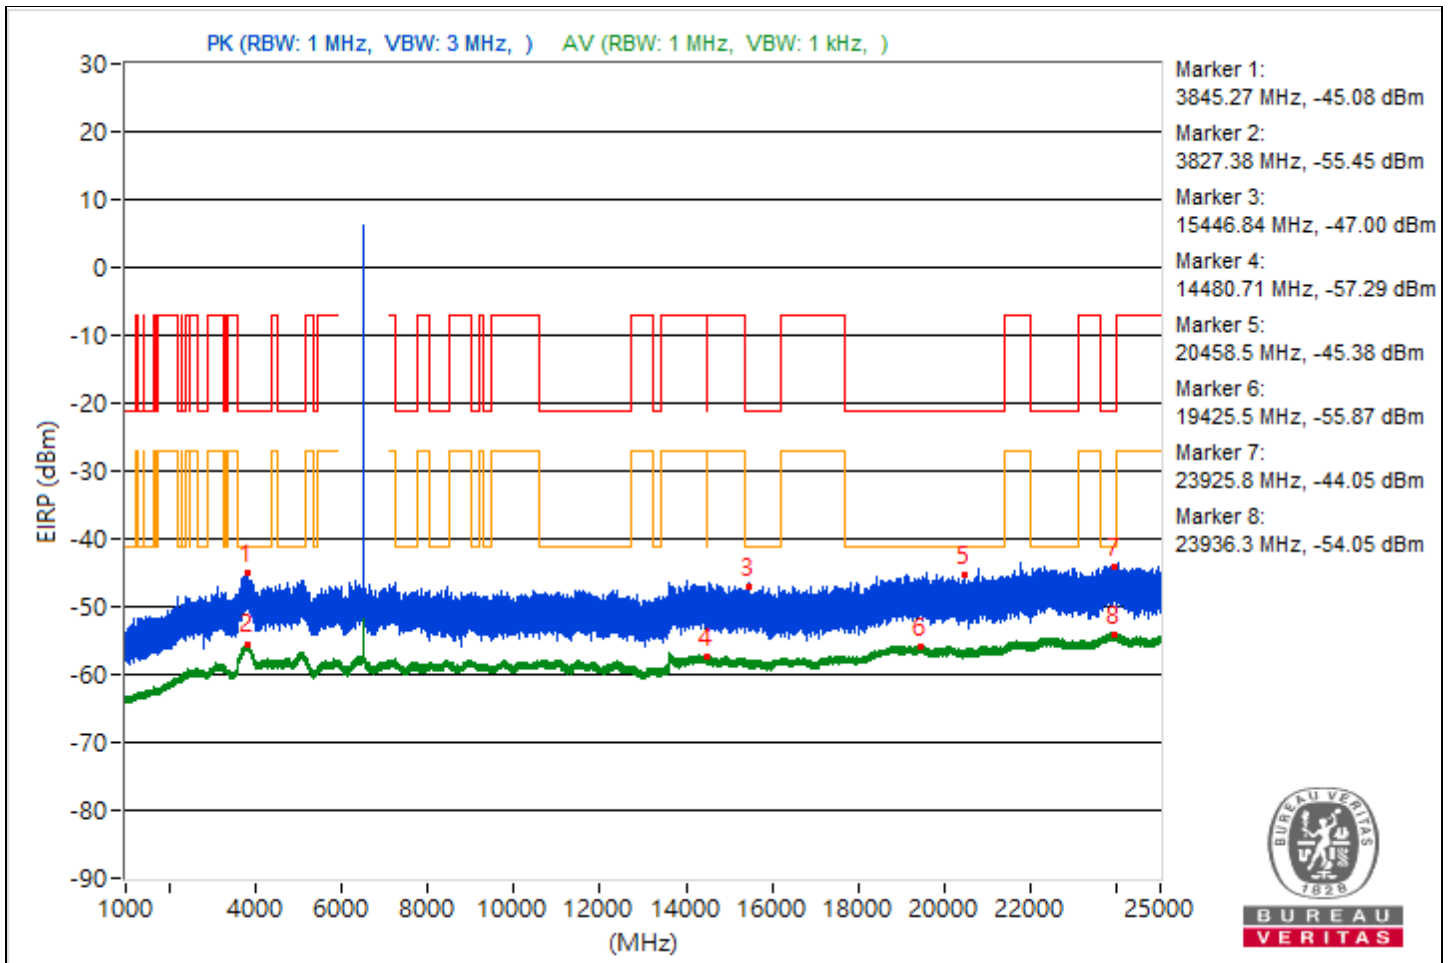

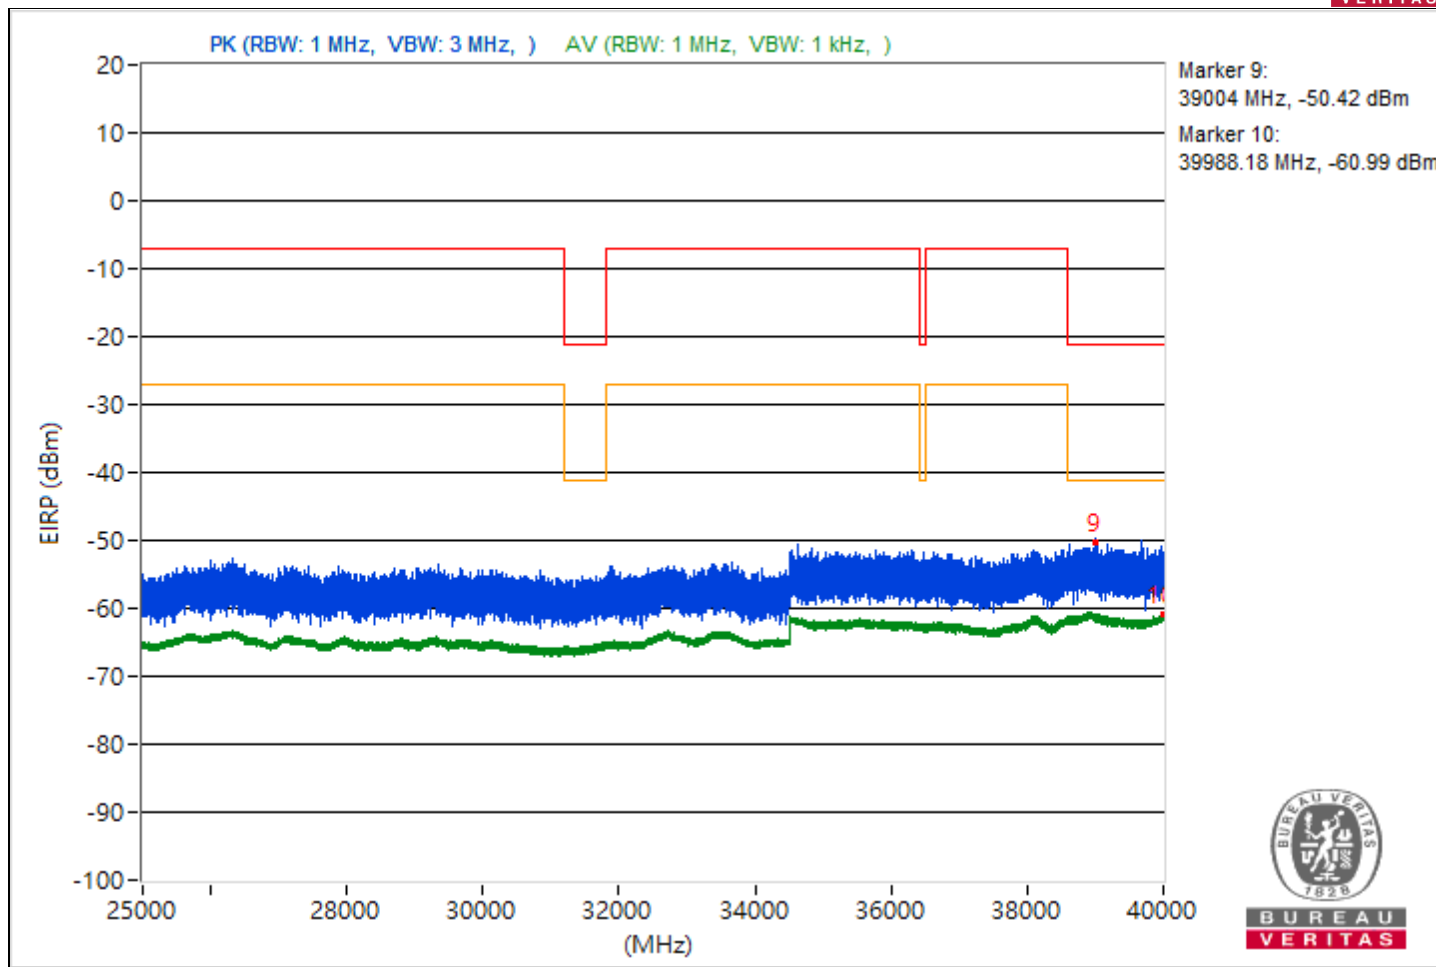





RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.92	50.05 PK	74	-23.95	-60.43	-54.04	7.93	-45.21
2	3785.84	39.74 AV	54	-14.26	-67.91	-65.37	7.93	-55.52
3	7299.14	48.23 PK	74	-25.77	-56.11	-61.26	7.93	-47.03
4	14473.87	37.89 AV	54	-16.11	-68.19	-68.45	7.93	-57.37
5	20855.5	49.97 PK	74	-24.03	-54.12	-60.52	7.93	-45.29
6	19485.6	39.31 AV	54	-14.69	-67.71	-66.21	7.93	-55.95
7	22413.9	51.03 PK	74	-22.97	-60.56	-52.83	7.93	-44.23
8	23867.1	41.13 AV	54	-12.87	-66.16	-64.2	7.93	-54.13
9	39347.56	45.39 PK	74	-28.61	-63.33	-59.22	7.93	-49.87
10	38887.29	34.68 AV	54	-19.32	-71.52	-71.52	7.93	-60.58

Note: Margin value = Emission Level - Limit value

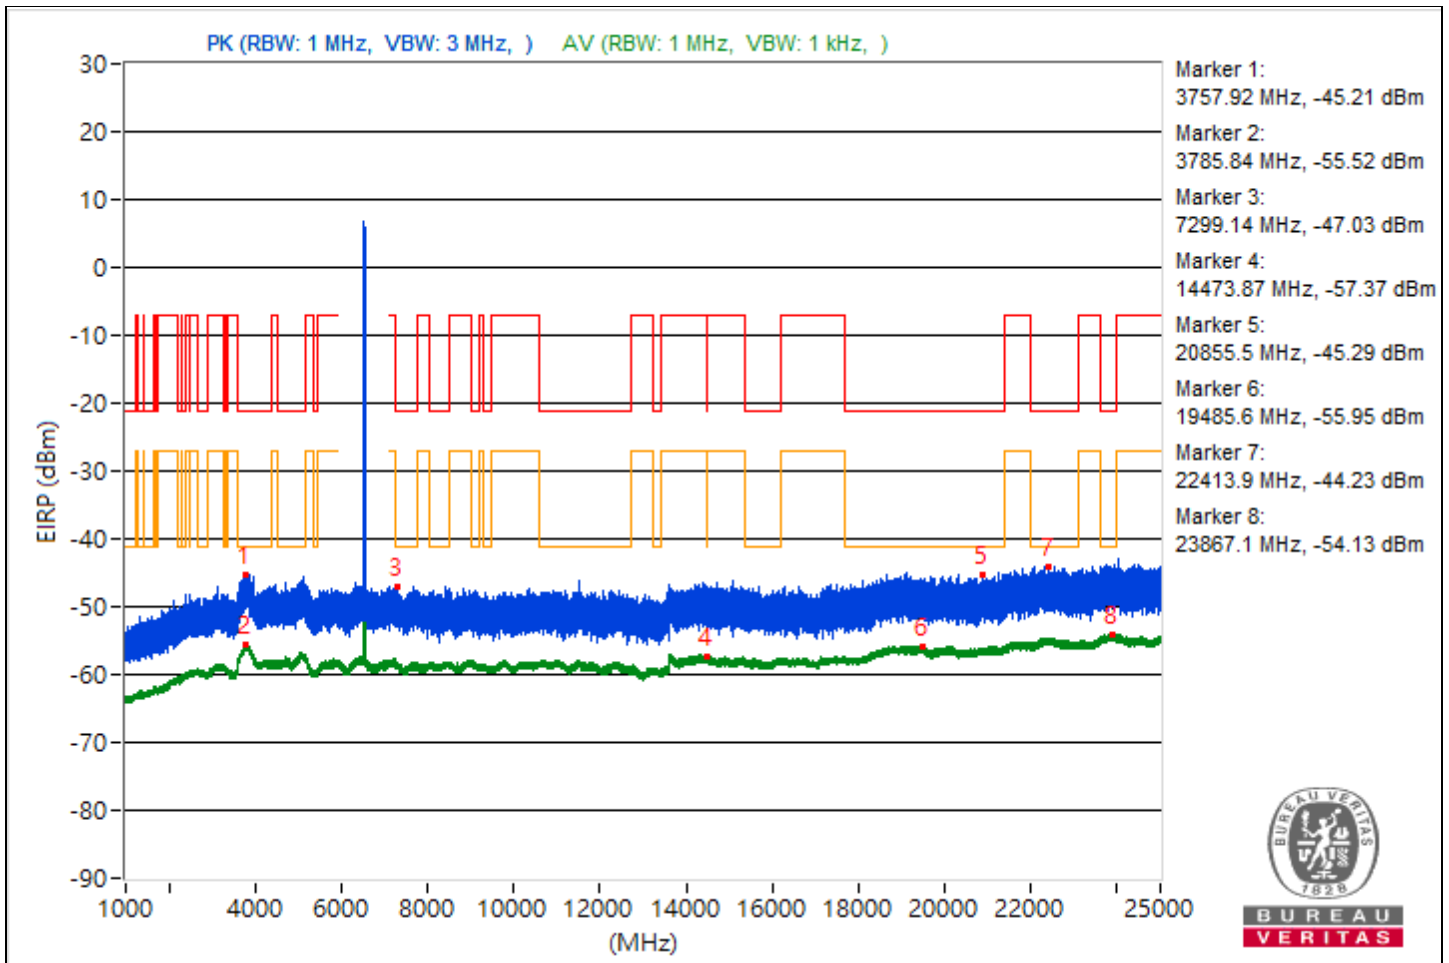

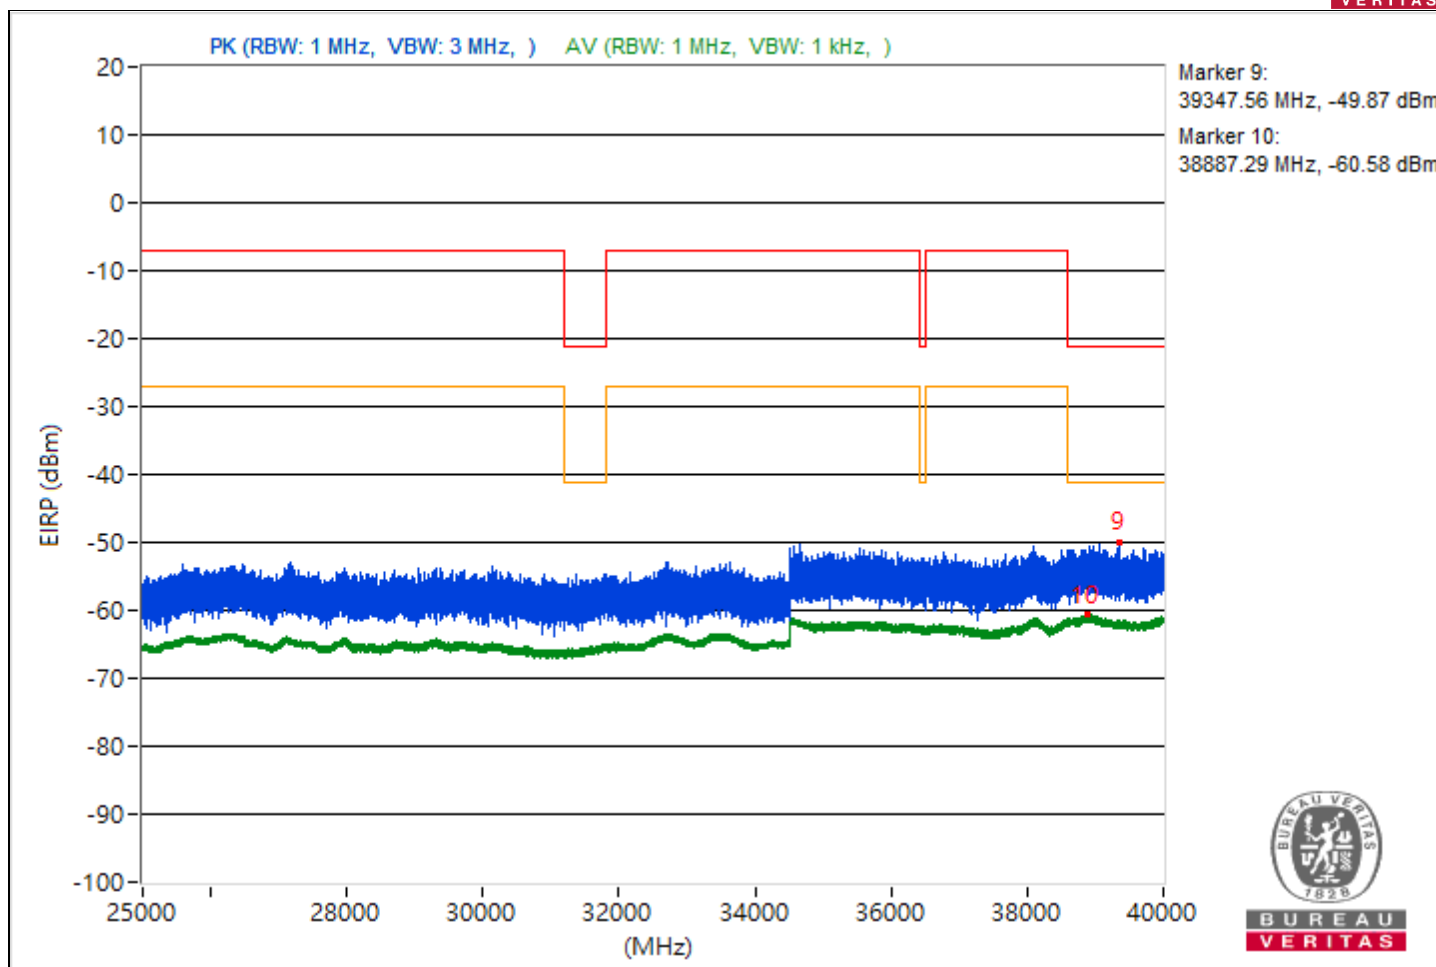





RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3727.59	50 PK	74	-24	-59.88	-54.24	7.93	-45.26
2	3832.12	39.79 AV	54	-14.21	-67.59	-65.49	7.93	-55.47
3	7672.48	49.2 PK	74	-24.8	-60.28	-55.15	7.93	-46.06
4	14476.09	37.67 AV	54	-16.33	-68.26	-68.82	7.93	-57.59
5	19390.1	49.78 PK	74	-24.22	-59.75	-54.56	7.93	-45.48
6	19477.7	39.42 AV	54	-14.58	-67.43	-66.22	7.93	-55.84
7	22291.5	51.45 PK	74	-22.55	-59.85	-52.47	7.93	-43.81
8	23904.7	41.25 AV	54	-12.75	-65.99	-64.11	7.93	-54.01
9	39930.93	44.77 PK	74	-29.23	-67.5	-59	7.93	-50.49
10	39996.36	34.18 AV	54	-19.82	-74.13	-70.6	7.93	-61.08

Note: Margin value = Emission Level - Limit value

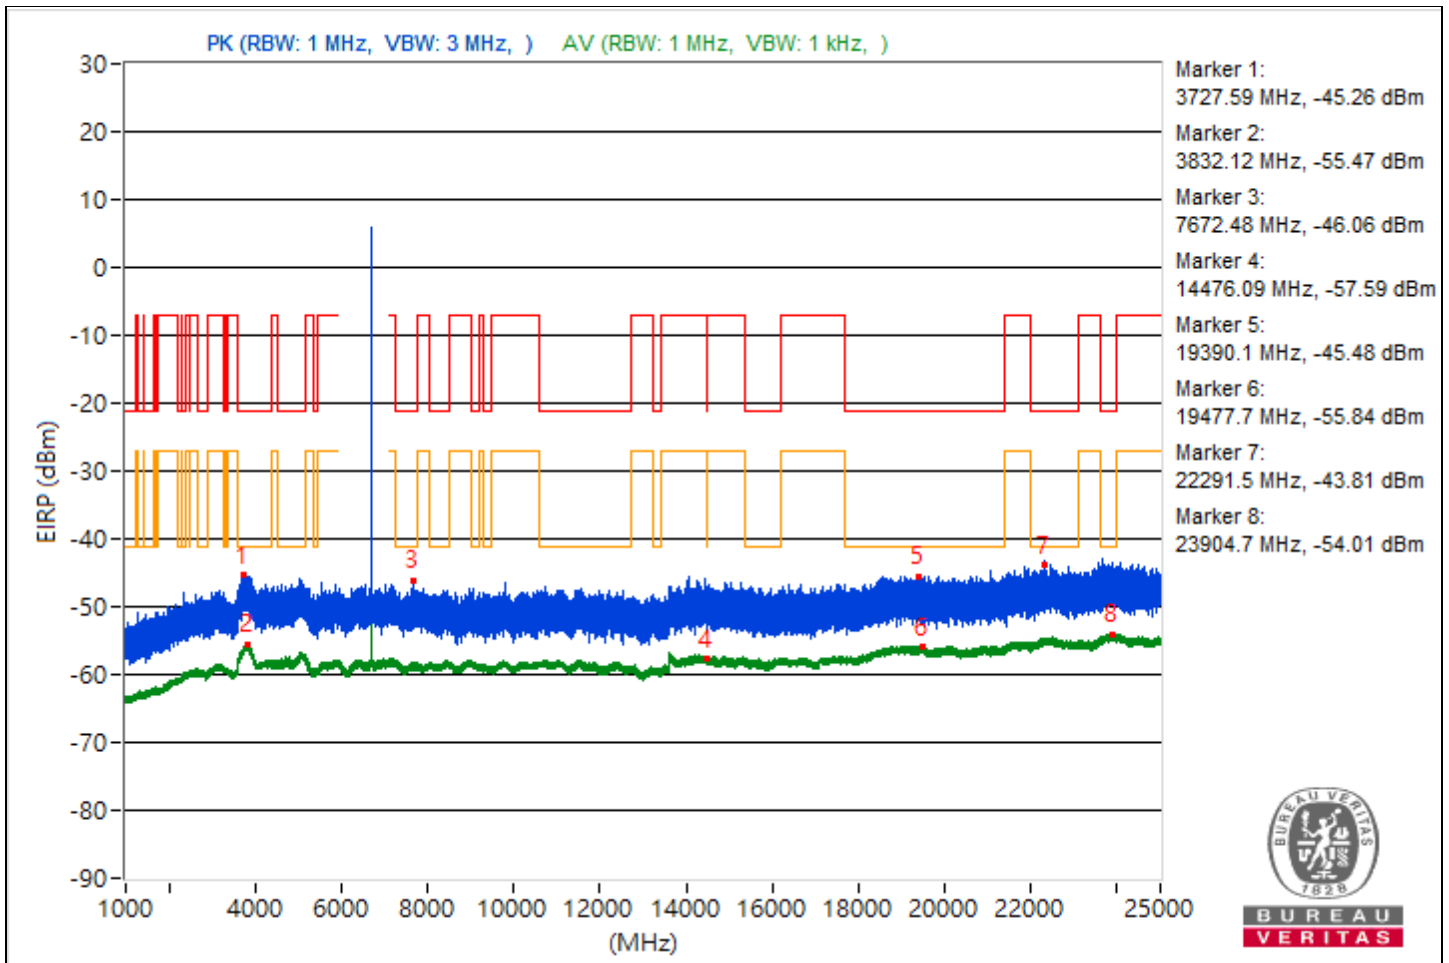

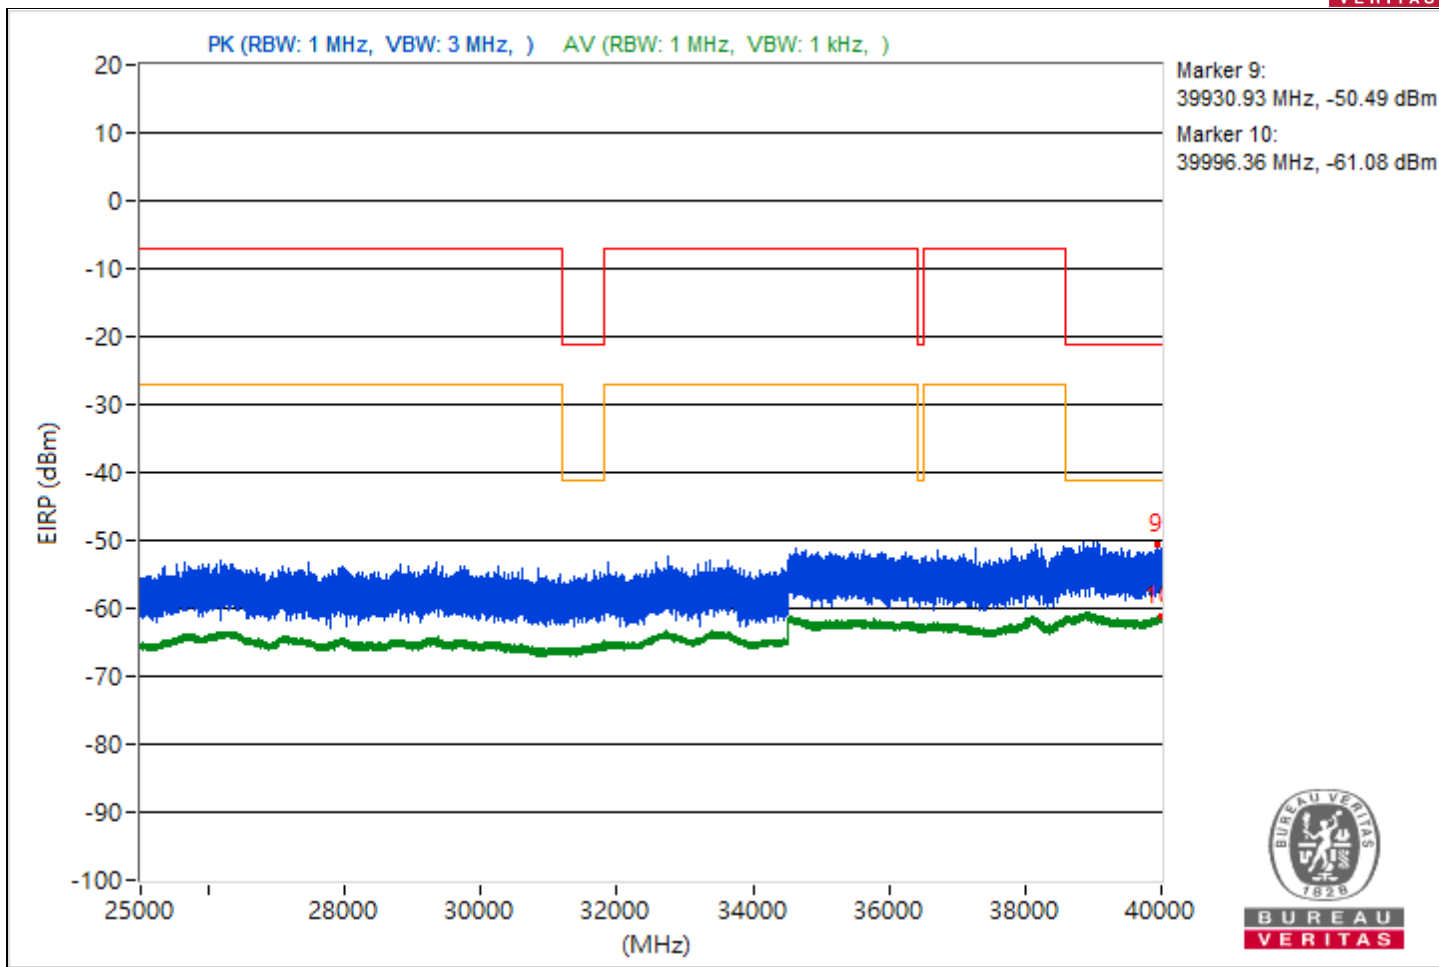





RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.12	50.17 PK	74	-23.83	-58.86	-54.33	7.93	-45.09
2	3824.58	39.75 AV	54	-14.25	-67.71	-65.48	7.93	-55.51
3	15406.04	48.16 PK	74	-25.84	-56.44	-60.59	7.93	-47.1
4	14486.13	37.85 AV	54	-16.15	-68.77	-67.97	7.93	-57.41
5	18860.6	50.58 PK	74	-23.42	-53.39	-60.46	7.93	-44.68
6	19056.8	39.41 AV	54	-14.59	-67.48	-66.19	7.93	-55.85
7	23694.9	51.37 PK	74	-22.63	-58.22	-52.96	7.93	-43.89
8	23886.1	41.27 AV	54	-12.73	-65.88	-64.15	7.93	-53.99
9	38958.4	44.94 PK	74	-29.06	-59.65	-63.84	7.93	-50.32
10	39987.56	34.39 AV	54	-19.61	-73.61	-70.54	7.93	-60.87

Note: Margin value = Emission Level - Limit value

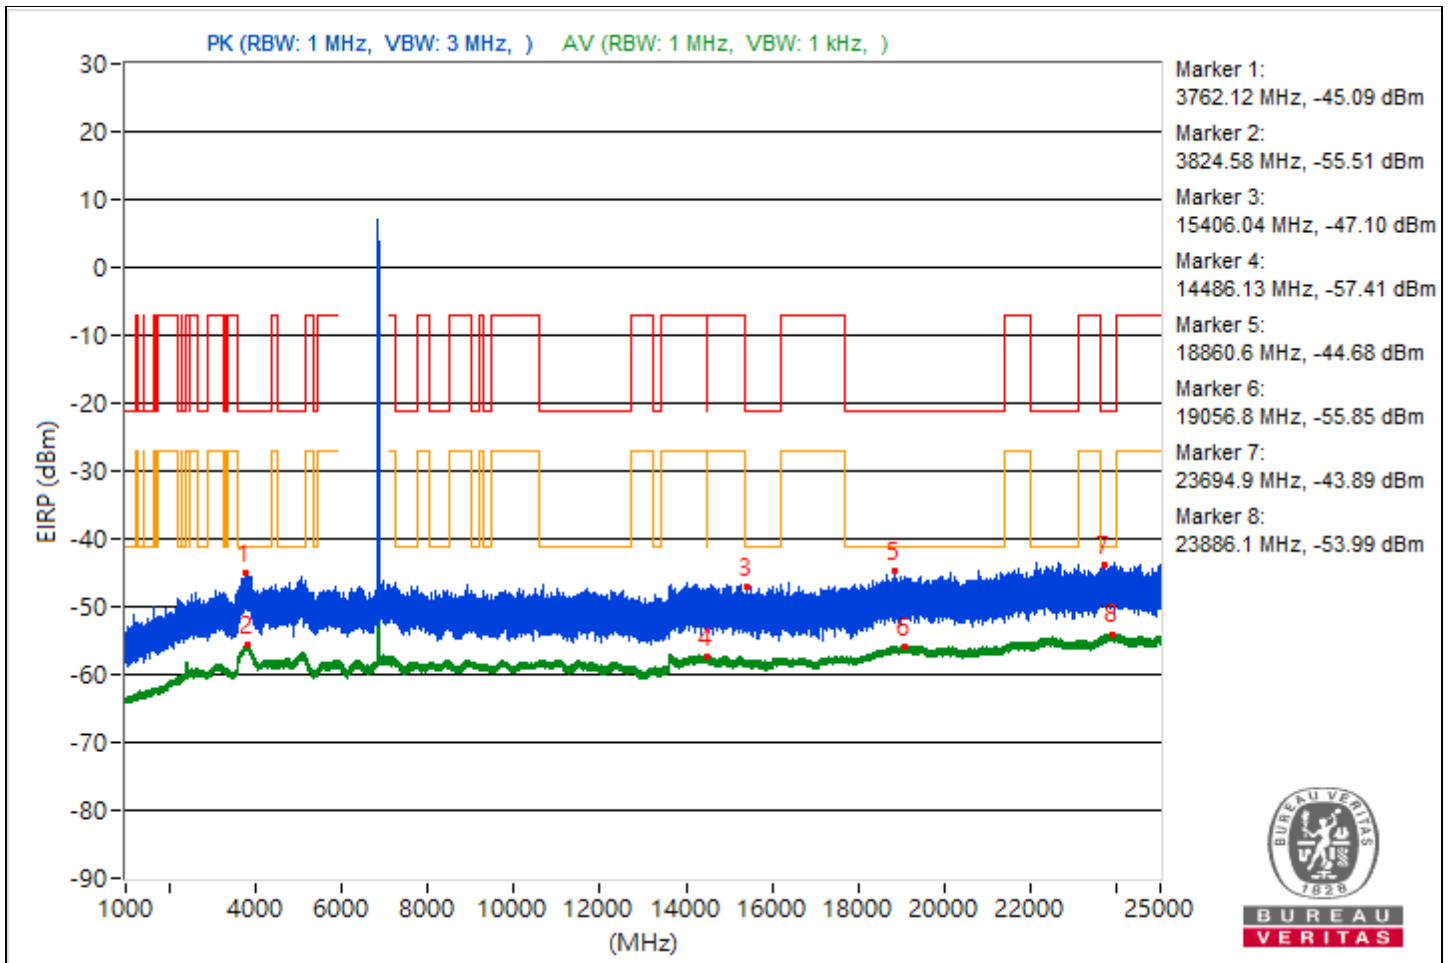

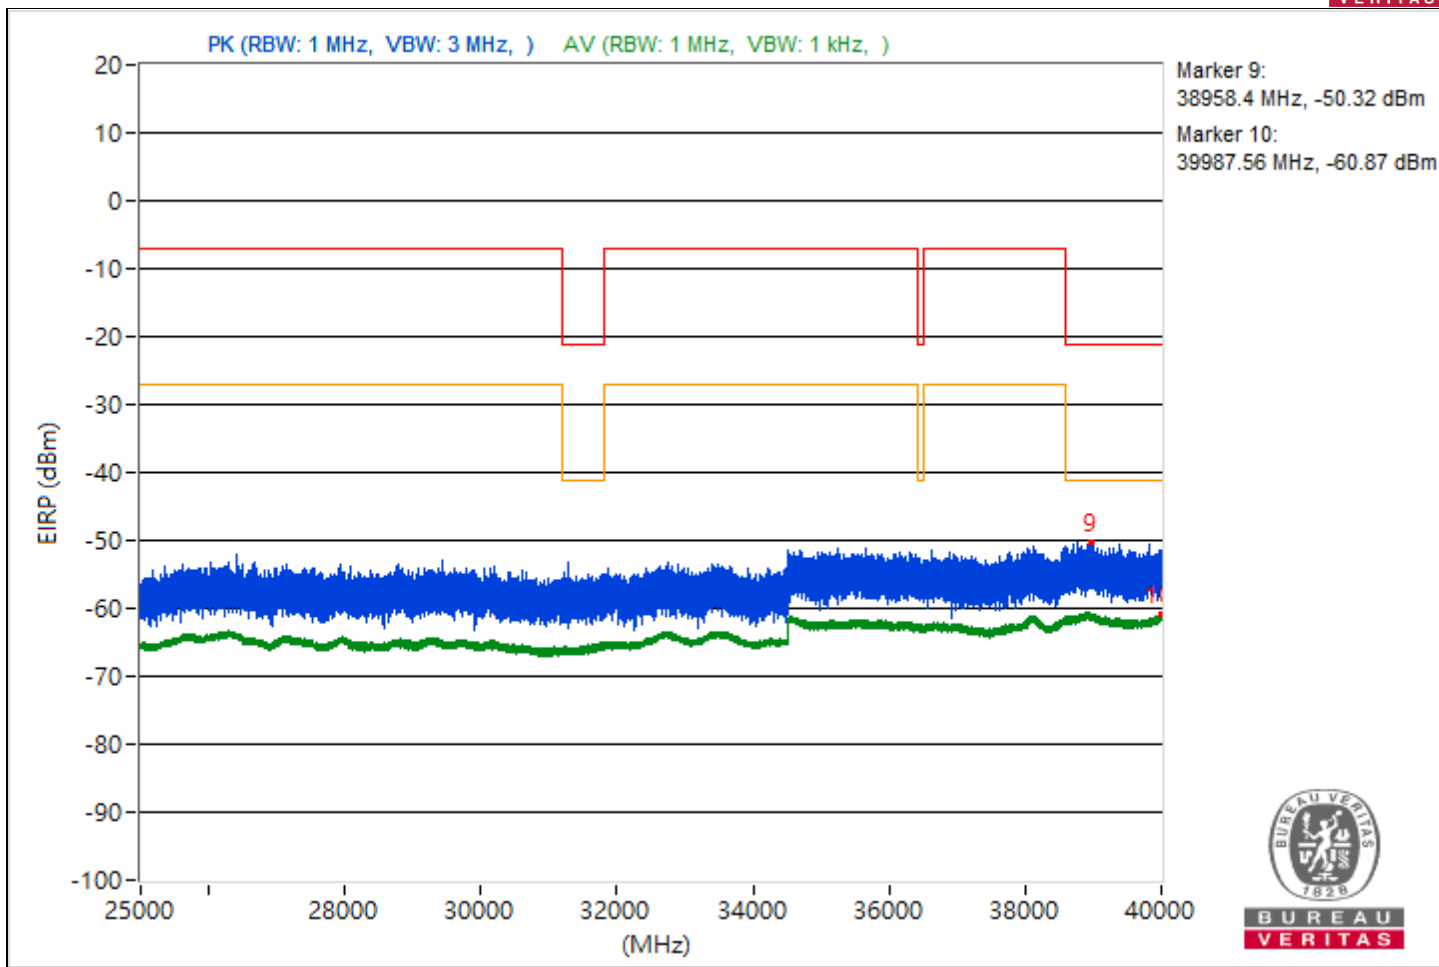





RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3848.69	50.94 PK	74	-23.06	-60.07	-53.03	7.93	-44.32
2	3798.21	39.77 AV	54	-14.23	-67.92	-65.32	7.93	-55.49
3	7254.58	47.77 PK	74	-26.23	-62.23	-56.44	7.93	-47.49
4	14473.96	37.95 AV	54	-16.05	-68.63	-67.9	7.93	-57.31
5	19667	51.15 PK	74	-22.85	-57.14	-53.65	7.93	-44.11
6	19495.7	39.46 AV	54	-14.54	-67.24	-66.29	7.93	-55.8
7	23933.5	51.88 PK	74	-22.12	-61.15	-51.78	7.93	-43.38
8	23979	41.23 AV	54	-12.77	-65.03	-64.91	7.93	-54.03
9	38859.2	44.8 PK	74	-29.2	-67.45	-58.97	7.93	-50.46
10	39974.58	34.36 AV	54	-19.64	-73.68	-70.56	7.93	-60.9

Note: Margin value = Emission Level - Limit value

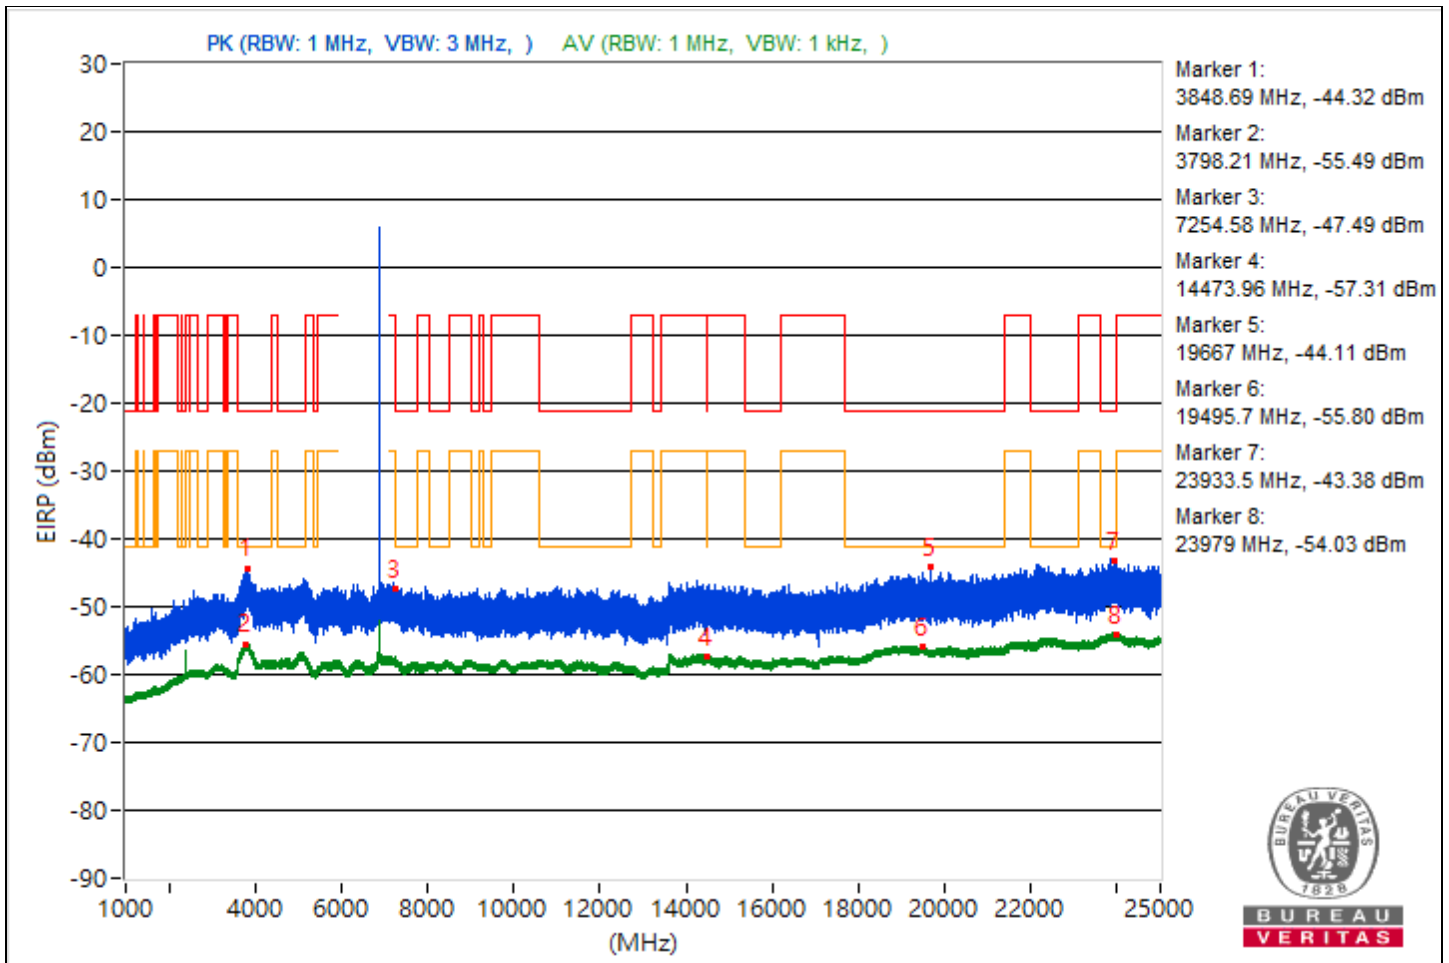

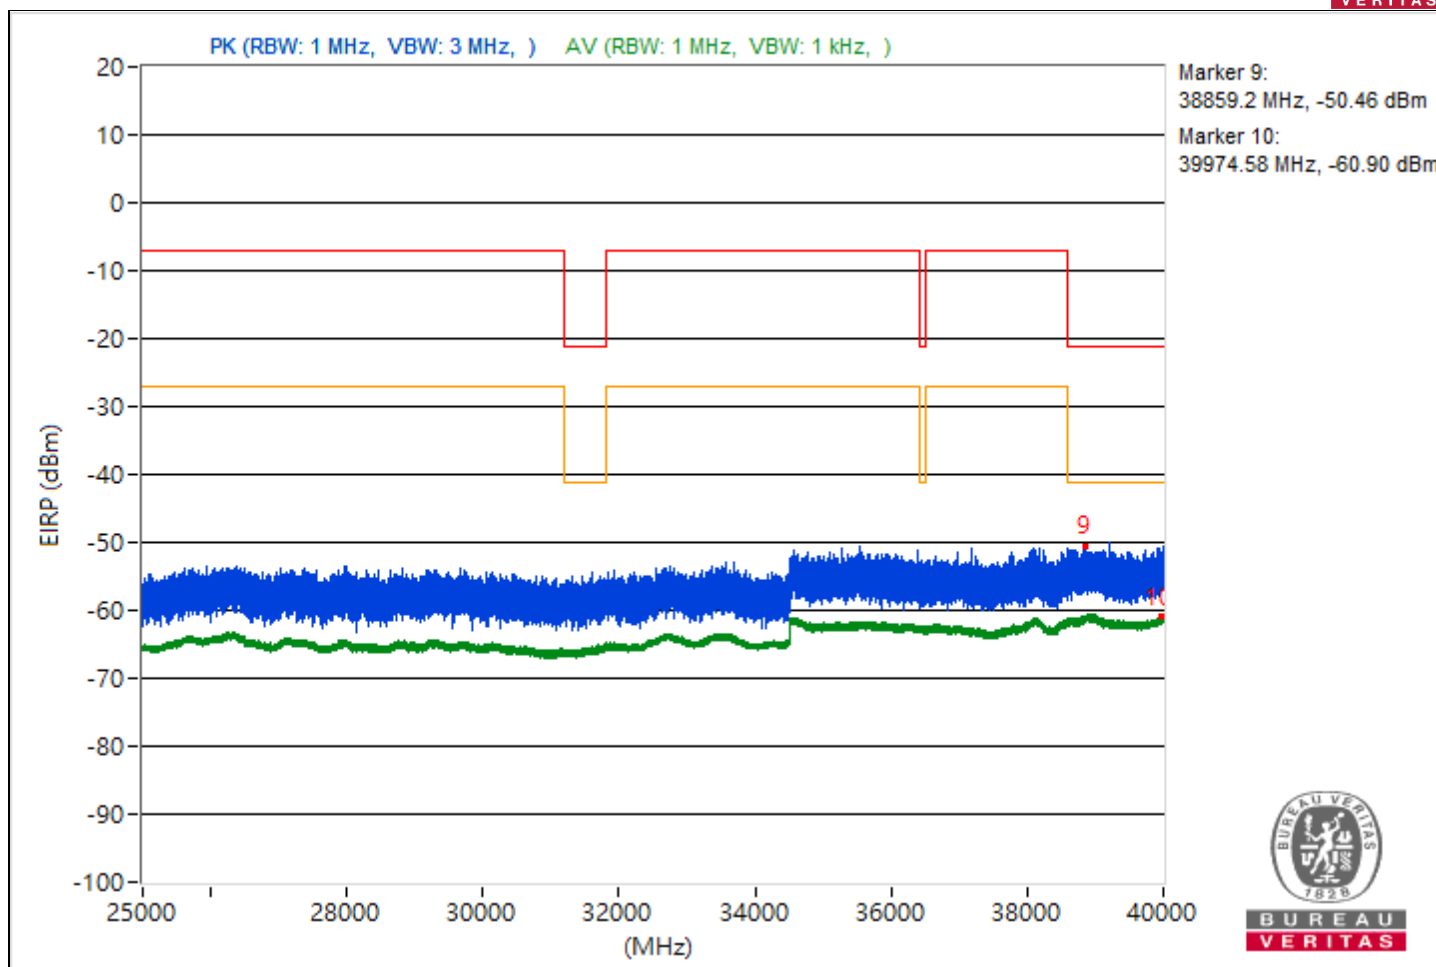





RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3698.66	50.19 PK	74	-23.81	-58.37	-54.5	7.93	-45.07
2	3832.04	39.68 AV	54	-14.32	-68.03	-65.4	7.93	-55.58
3	15762.31	48.13 PK	74	-25.87	-55.67	-63.89	7.93	-47.13
4	14493.51	37.8 AV	54	-16.2	-69	-67.87	7.93	-57.46
5	20221.4	50.16 PK	74	-23.84	-59.12	-54.26	7.93	-45.1
6	19473.9	39.33 AV	54	-14.67	-67.5	-66.32	7.93	-55.93
7	23819.1	52.21 PK	74	-21.79	-58.49	-51.83	7.93	-43.05
8	23896.9	41.37 AV	54	-12.63	-65.57	-64.2	7.93	-53.89
9	38808.36	44.67 PK	74	-29.33	-59.82	-64.39	7.93	-50.59
10	38837.42	34.44 AV	54	-19.56	-71.55	-71.99	7.93	-60.82

Note: Margin value = Emission Level - Limit value

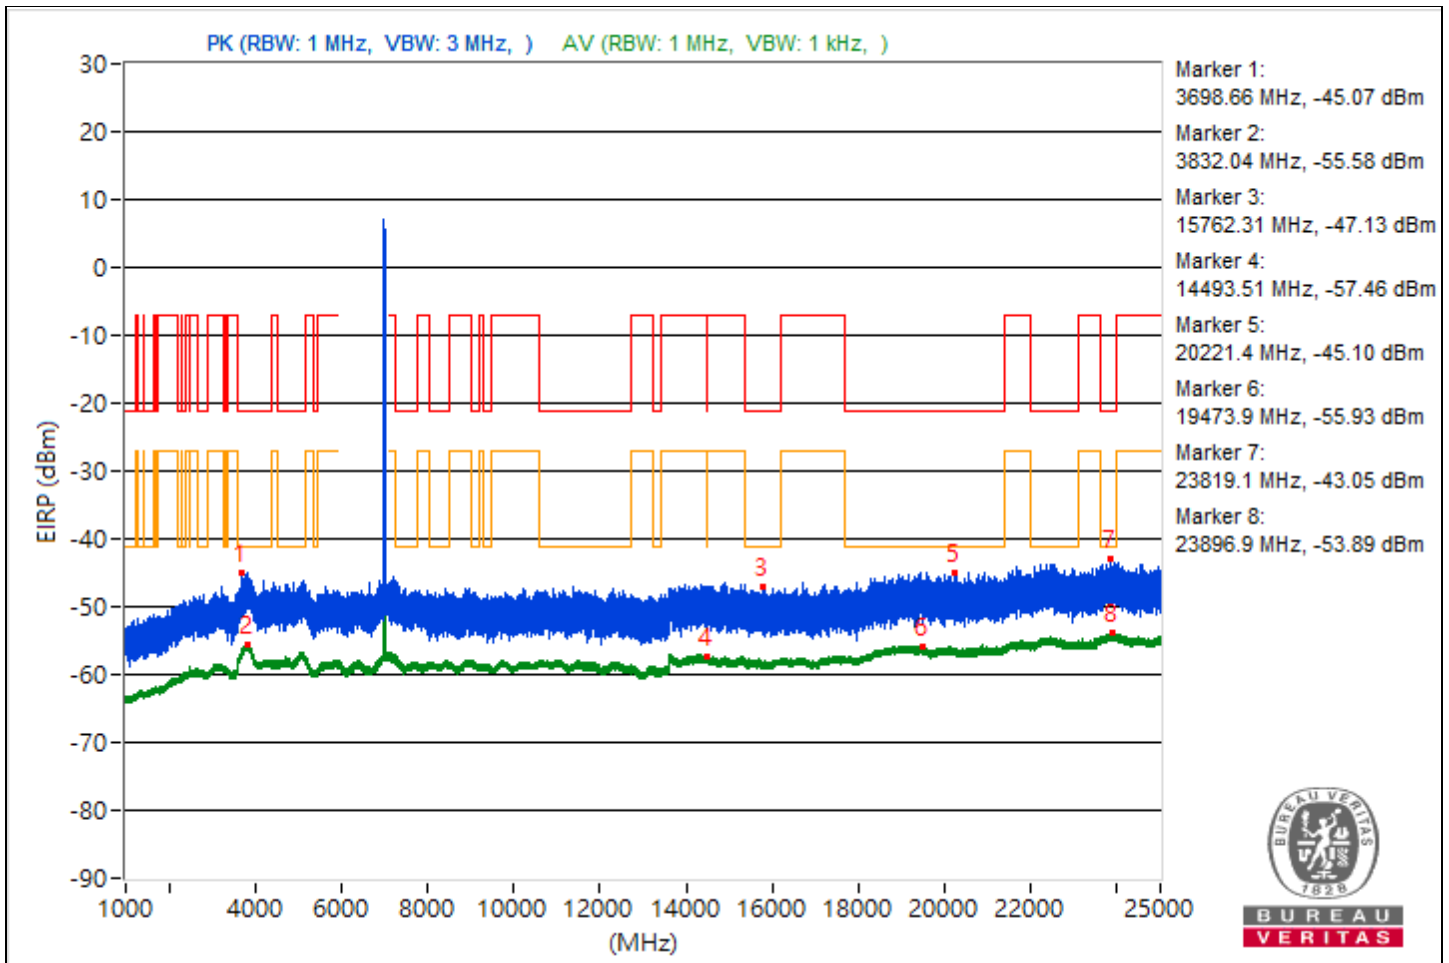

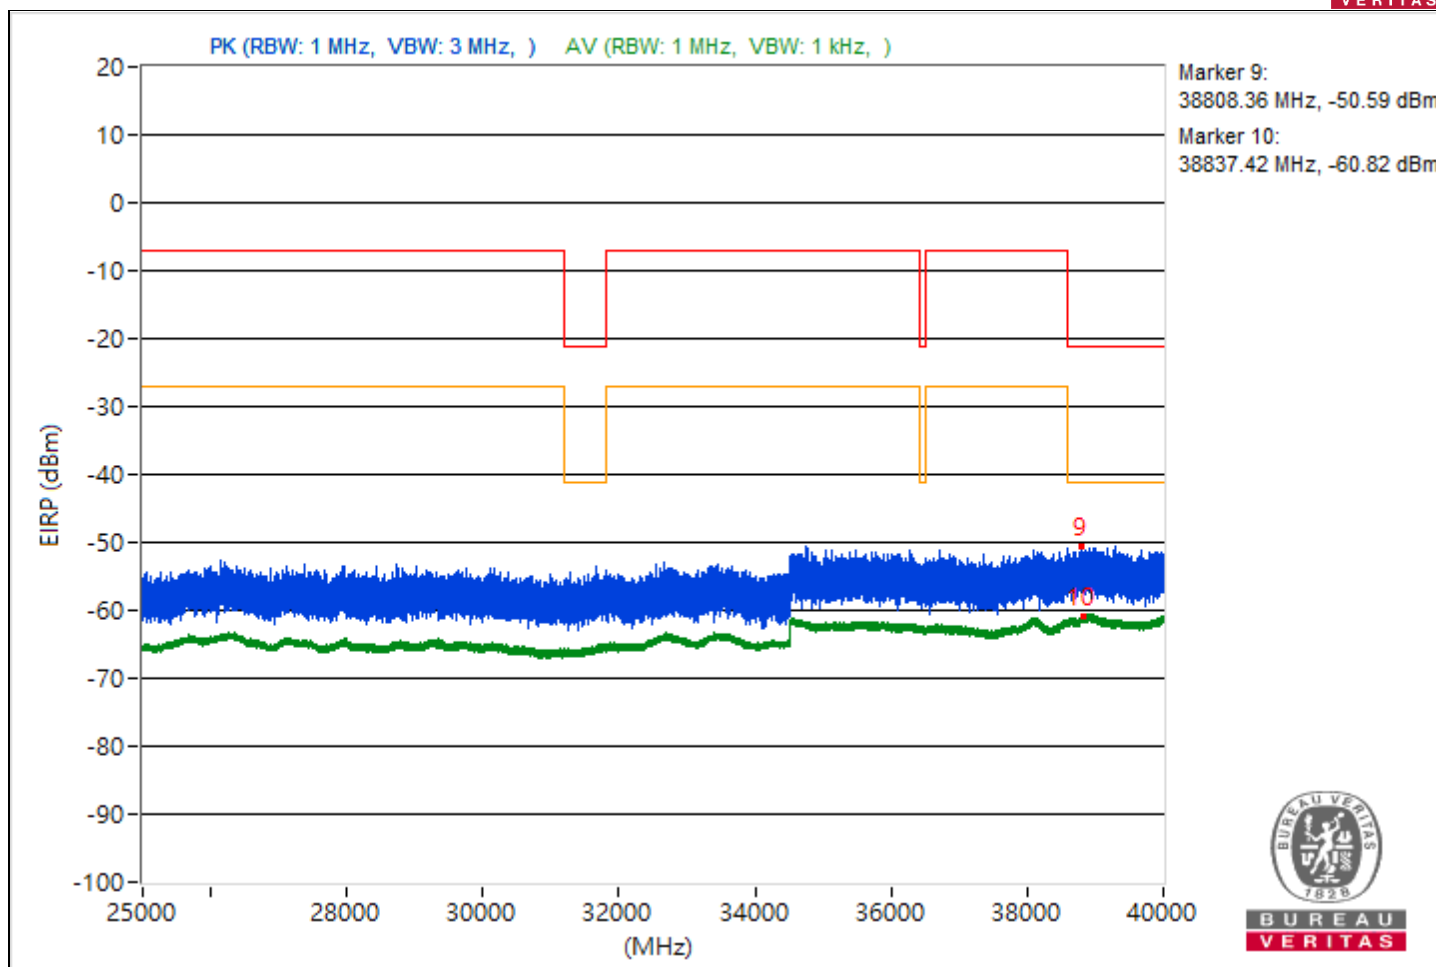





RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.26	51.24 PK	74	-22.76	-59.72	-52.75	7.93	-44.02
2	3818.43	39.71 AV	54	-14.29	-67.79	-65.49	7.93	-55.55
3	7526.96	48.49 PK	74	-25.51	-60.16	-56.15	7.93	-46.77
4	7266.01	38.02 AV	54	-15.98	-67.57	-68.89	7.93	-57.24
5	21037.5	50.12 PK	74	-23.88	-54.07	-59.98	7.93	-45.14
6	19466.2	39.28 AV	54	-14.72	-67.76	-66.21	7.93	-55.98
7	23772	52.09 PK	74	-21.91	-58.79	-51.91	7.93	-43.17
8	23831.6	41.32 AV	54	-12.68	-65.12	-64.64	7.93	-53.94
9	39014.31	44.64 PK	74	-29.36	-66.96	-59.23	7.93	-50.62
10	38820.89	34.54 AV	54	-19.46	-71.44	-71.89	7.93	-60.72

Note: Margin value = Emission Level - Limit value

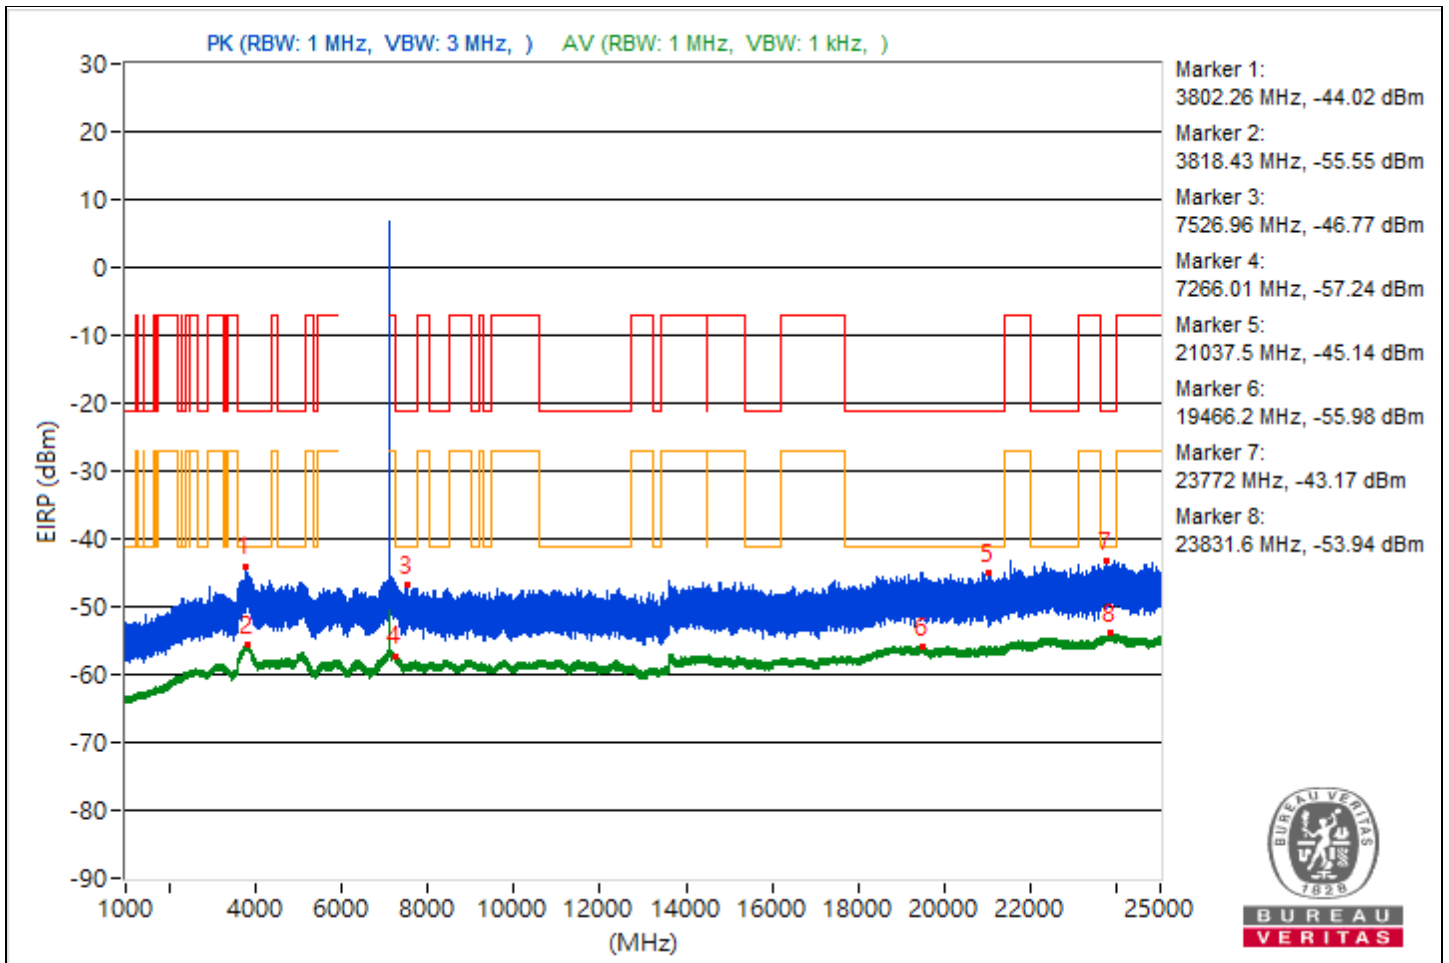

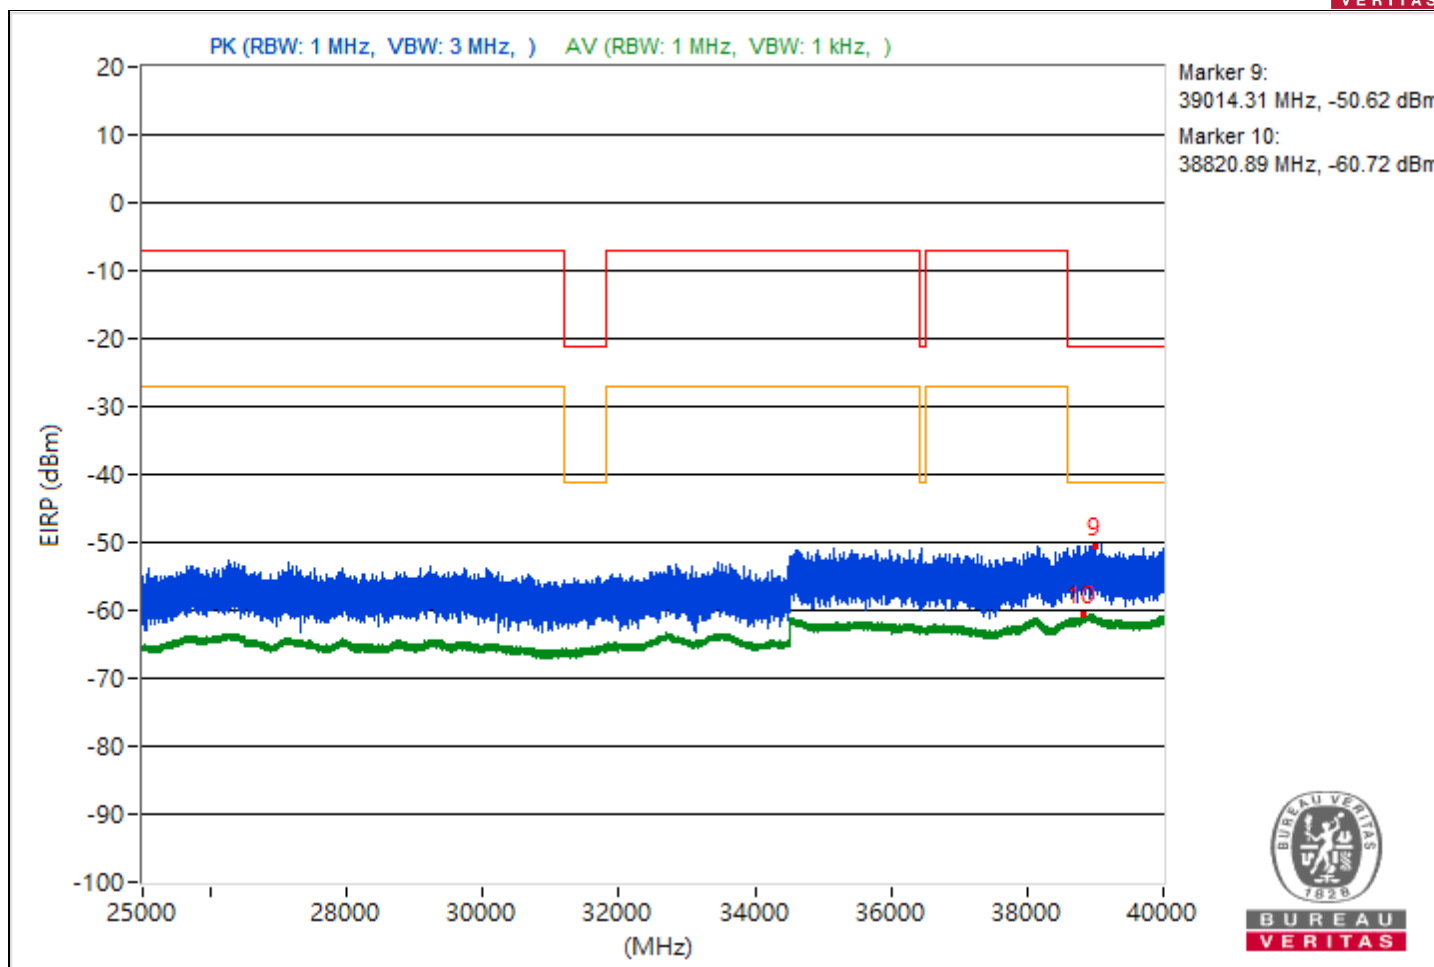


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5957.98	101.37 PK			-5.87	-3.73	7.77	6.11
2	*5955.65	92.09 AV			-13.79	-14.13	7.77	-3.17
3	#5899	69.2 PK	88.26	-19.06	-35	-40.12	7.77	-26.06
4	#5853.02	56.81 AV	68.26	-11.45	-49.04	-49.44	7.77	-38.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

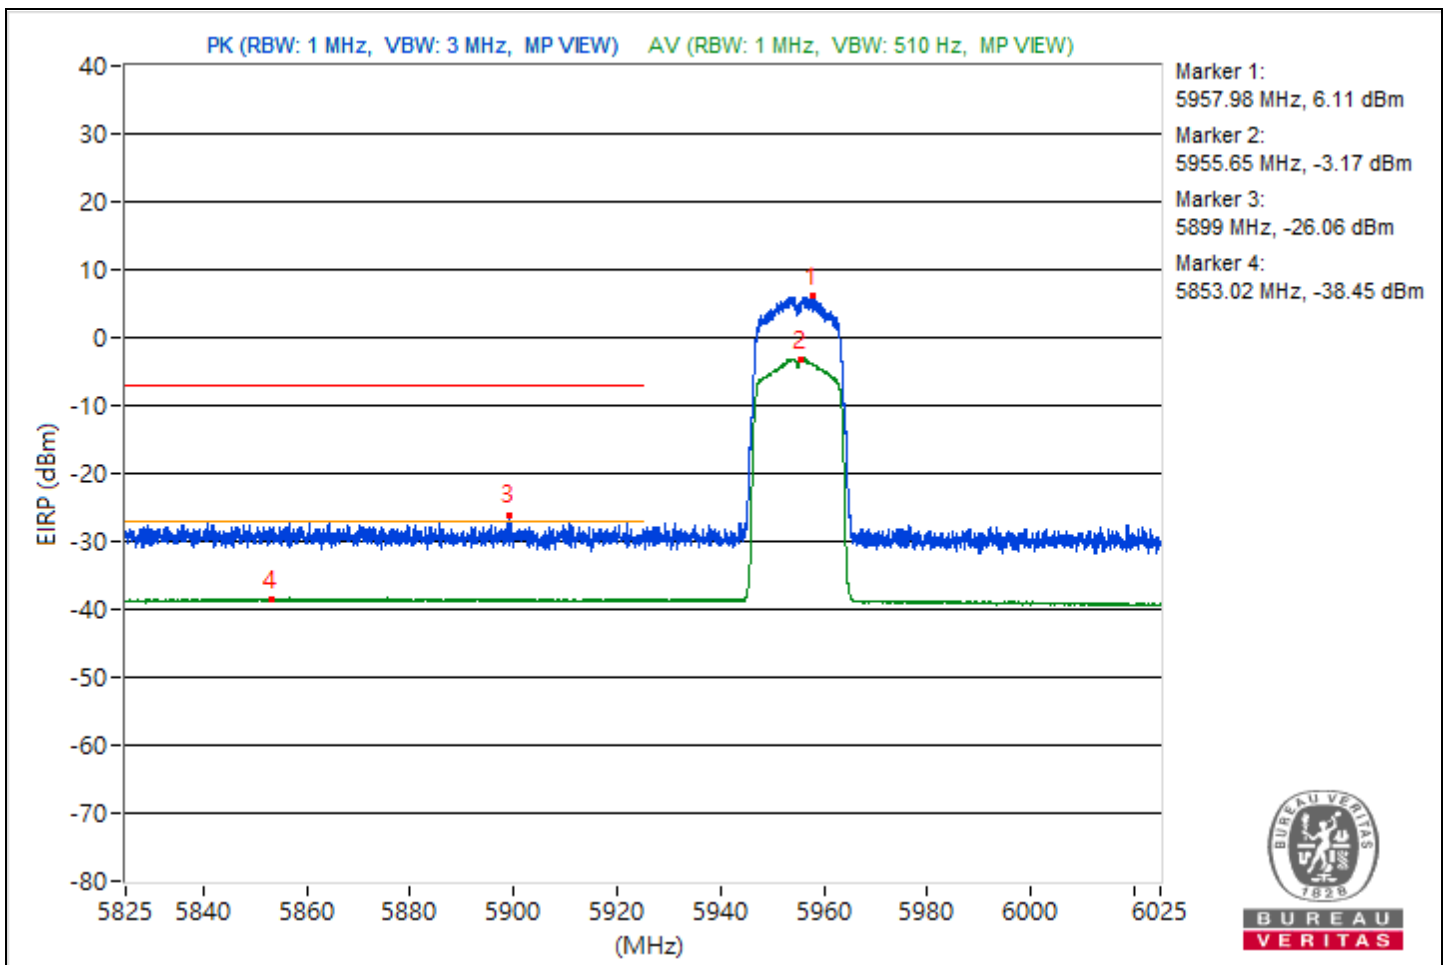


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.57	102.27 PK			-3.5	-2.74	7.1	7.01
2	*7114.1	92.7 AV			-12.57	-12.78	7.1	-2.56
3	#7125	63.06 PK	88.26	-25.2	-43.37	-41.45	7.1	-32.2
4	#7125	49.3 AV	68.26	-18.96	-56.1	-56.05	7.1	-45.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

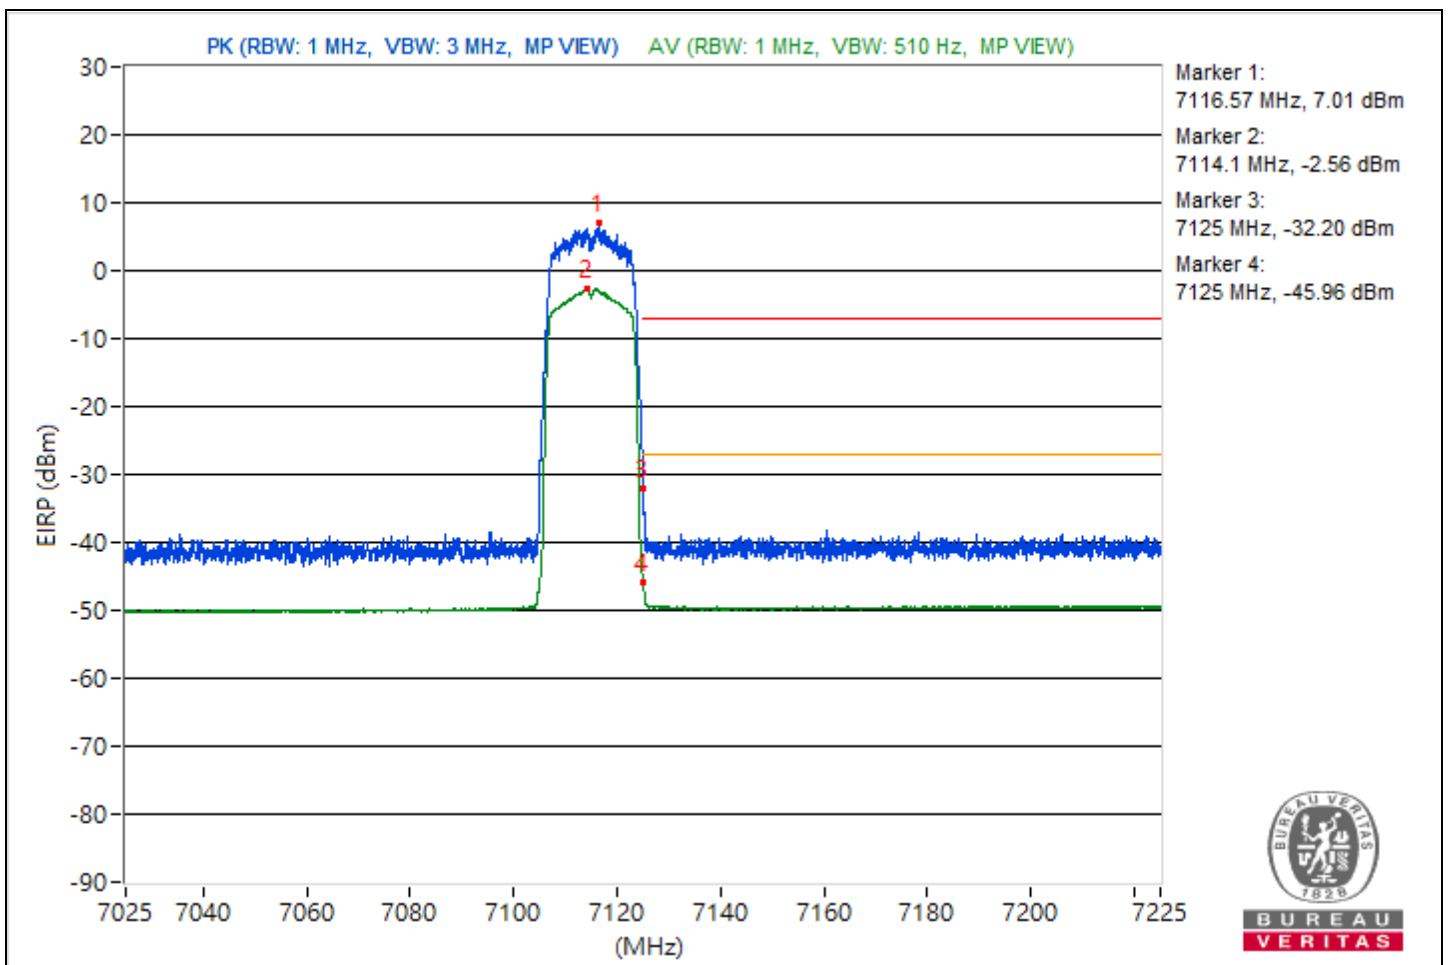





For 2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.6	47.53 PK	74	-26.47	-59.35	-53.7	4.92	-47.73
2	3806.22	36.62 AV	54	-17.38	-67.84	-65.59	4.92	-58.64
3	7673.57	45.03 PK	74	-28.97	-61.8	-56.2	4.92	-50.23
4	14477.42	34.83 AV	54	-19.17	-68.89	-67.89	4.92	-60.43
5	19912.6	47.32 PK	74	-26.68	-58.95	-54.09	4.92	-47.94
6	21168.7	36.29 AV	54	-17.71	-66.29	-67.62	4.92	-58.97
7	23915.6	48.76 PK	74	-25.24	-59.26	-52.2	4.92	-46.5
8	23872.4	38.24 AV	54	-15.76	-65.86	-64.2	4.92	-57.02
9	38647.64	42.44 PK	74	-31.56	-63.74	-58.99	4.92	-52.82
10	39990.22	31.31 AV	54	-22.69	-73.6	-70.64	4.92	-63.95

Note: Margin value = Emission Level - Limit value

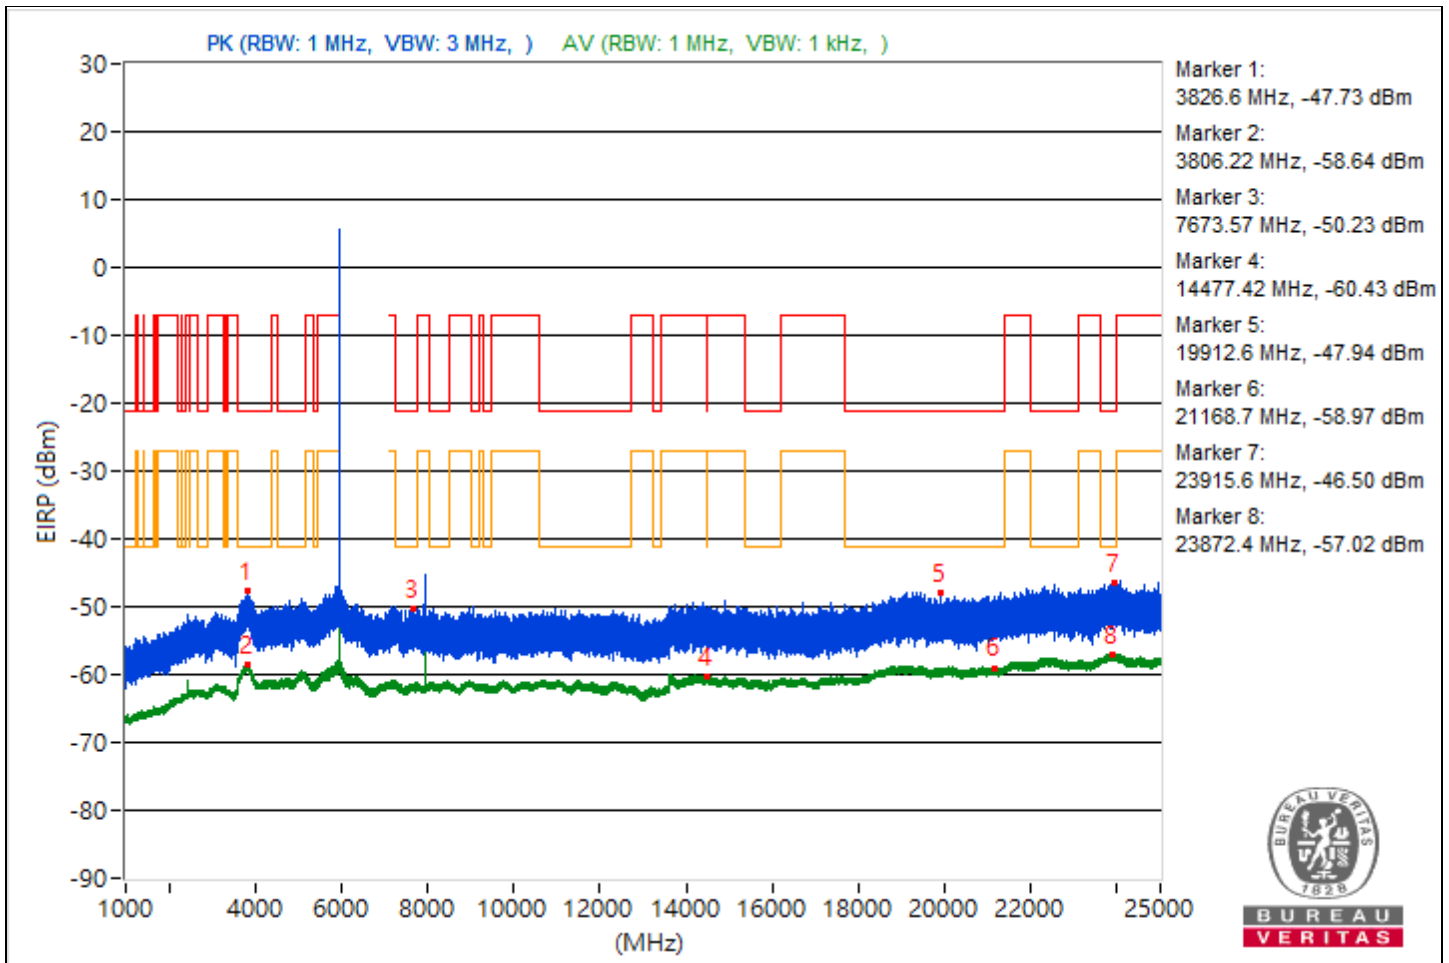

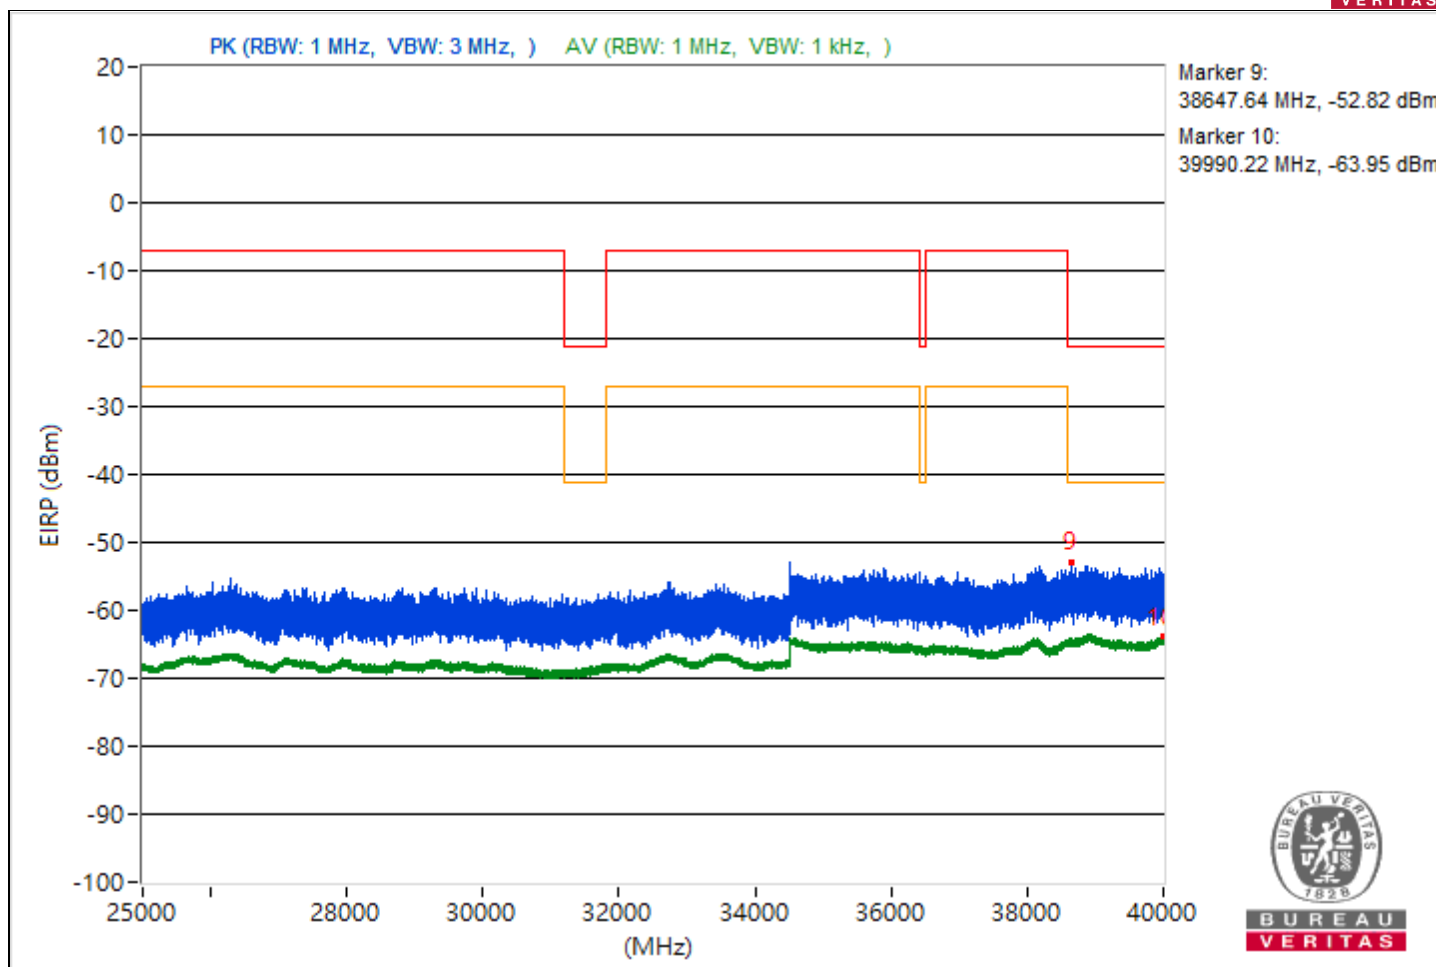





RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.98	47.43 PK	74	-26.57	-55.34	-56.24	4.92	-47.83
2	3822.63	36.63 AV	54	-17.37	-67.71	-65.64	4.92	-58.63
3	8233.42	47.67 PK	74	-26.33	-53.96	-57.97	4.92	-47.59
4	8233.33	43.57 AV	54	-10.43	-57.31	-64.9	4.92	-51.69
5	20495	47.98 PK	74	-26.02	-57.37	-53.77	4.92	-47.28
6	19058.9	36.44 AV	54	-17.56	-67.36	-66.2	4.92	-58.82
7	23787.9	49.22 PK	74	-24.78	-57.06	-52.18	4.92	-46.04
8	23782.5	38.22 AV	54	-15.78	-65.88	-64.21	4.92	-57.04
9	38812.18	41.93 PK	74	-32.07	-58.76	-67.81	4.92	-53.33
10	38902.58	31.55 AV	54	-22.45	-71.55	-71.74	4.92	-63.71

Note: Margin value = Emission Level - Limit value

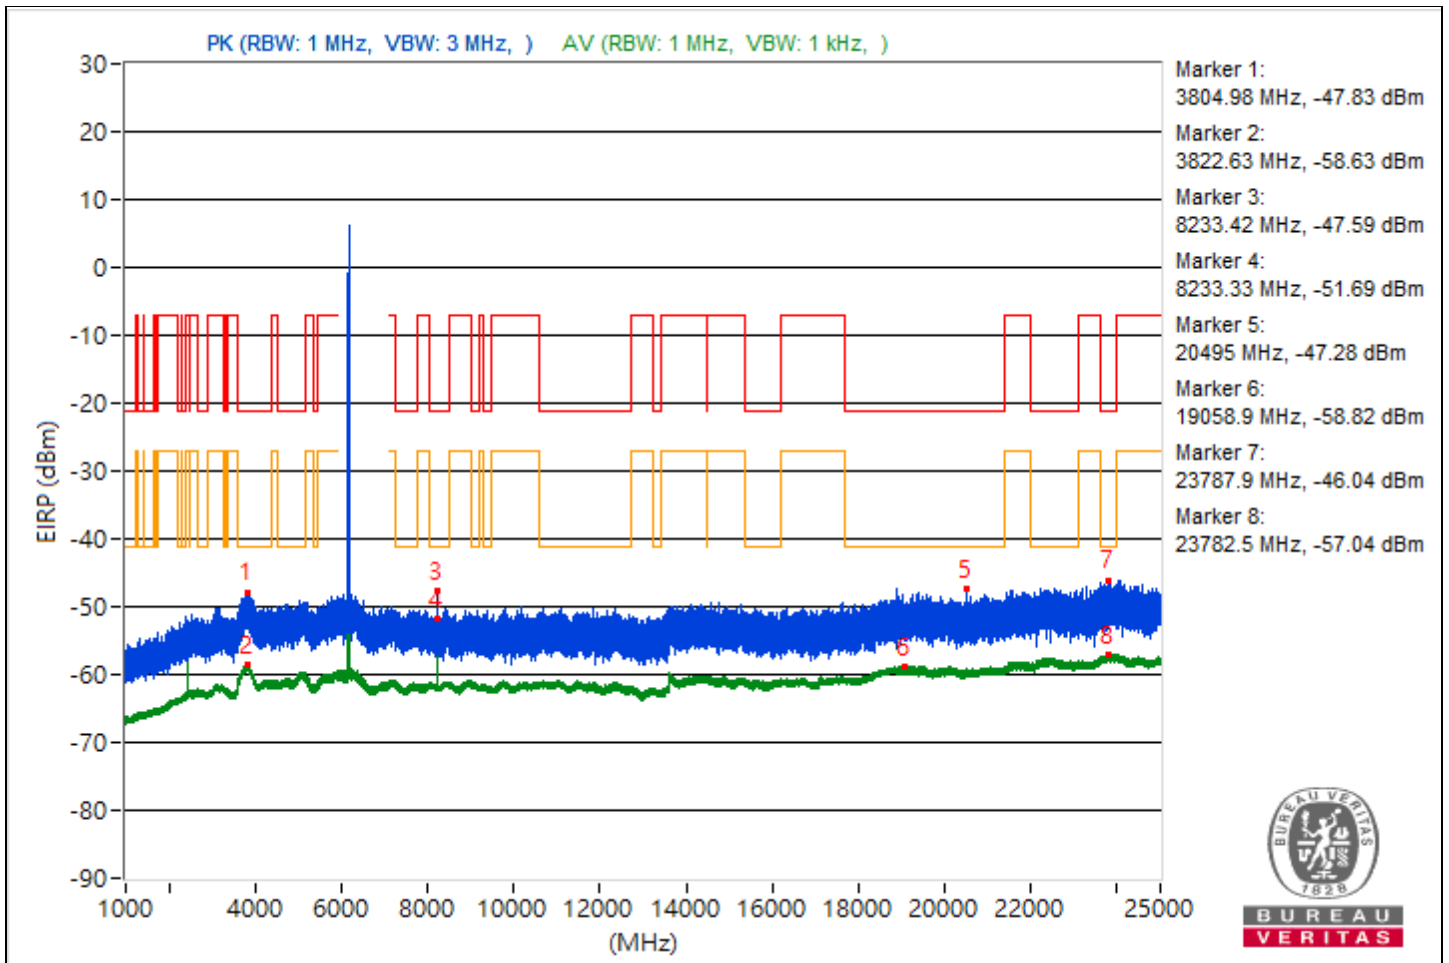

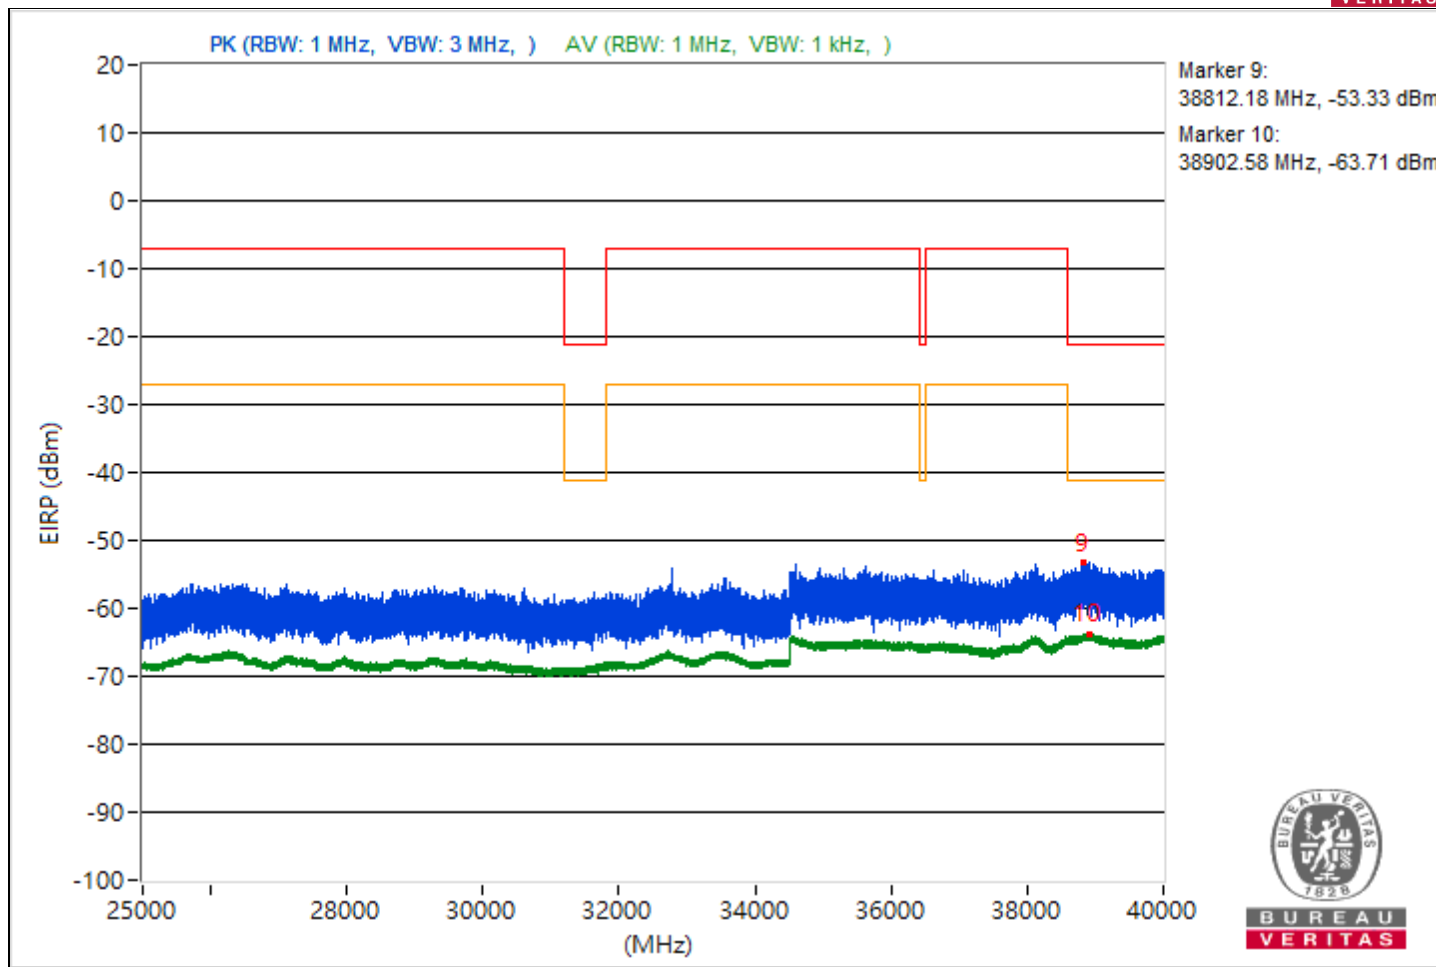





RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3878.01	48.04 PK	74	-25.96	-57.37	-53.68	4.92	-47.22
2	3790.67	36.72 AV	54	-17.28	-67.65	-65.54	4.92	-58.54
3	12147.2	45.17 PK	74	-28.83	-61.84	-56.02	4.92	-50.09
4	14499.02	34.82 AV	54	-19.18	-68.92	-67.88	4.92	-60.44
5	19189.4	47.34 PK	74	-26.66	-59.36	-53.94	4.92	-47.92
6	21396.7	36.31 AV	54	-17.69	-66.41	-67.41	4.92	-58.95
7	23630.4	48.95 PK	74	-25.05	-52.79	-56.42	4.92	-46.31
8	23825.2	38.38 AV	54	-15.62	-65.72	-64.06	4.92	-56.88
9	39988.44	42.56 PK	74	-31.44	-66	-58.3	4.92	-52.7
10	39985.07	31.51 AV	54	-22.49	-73.41	-70.44	4.92	-63.75

Note: Margin value = Emission Level - Limit value

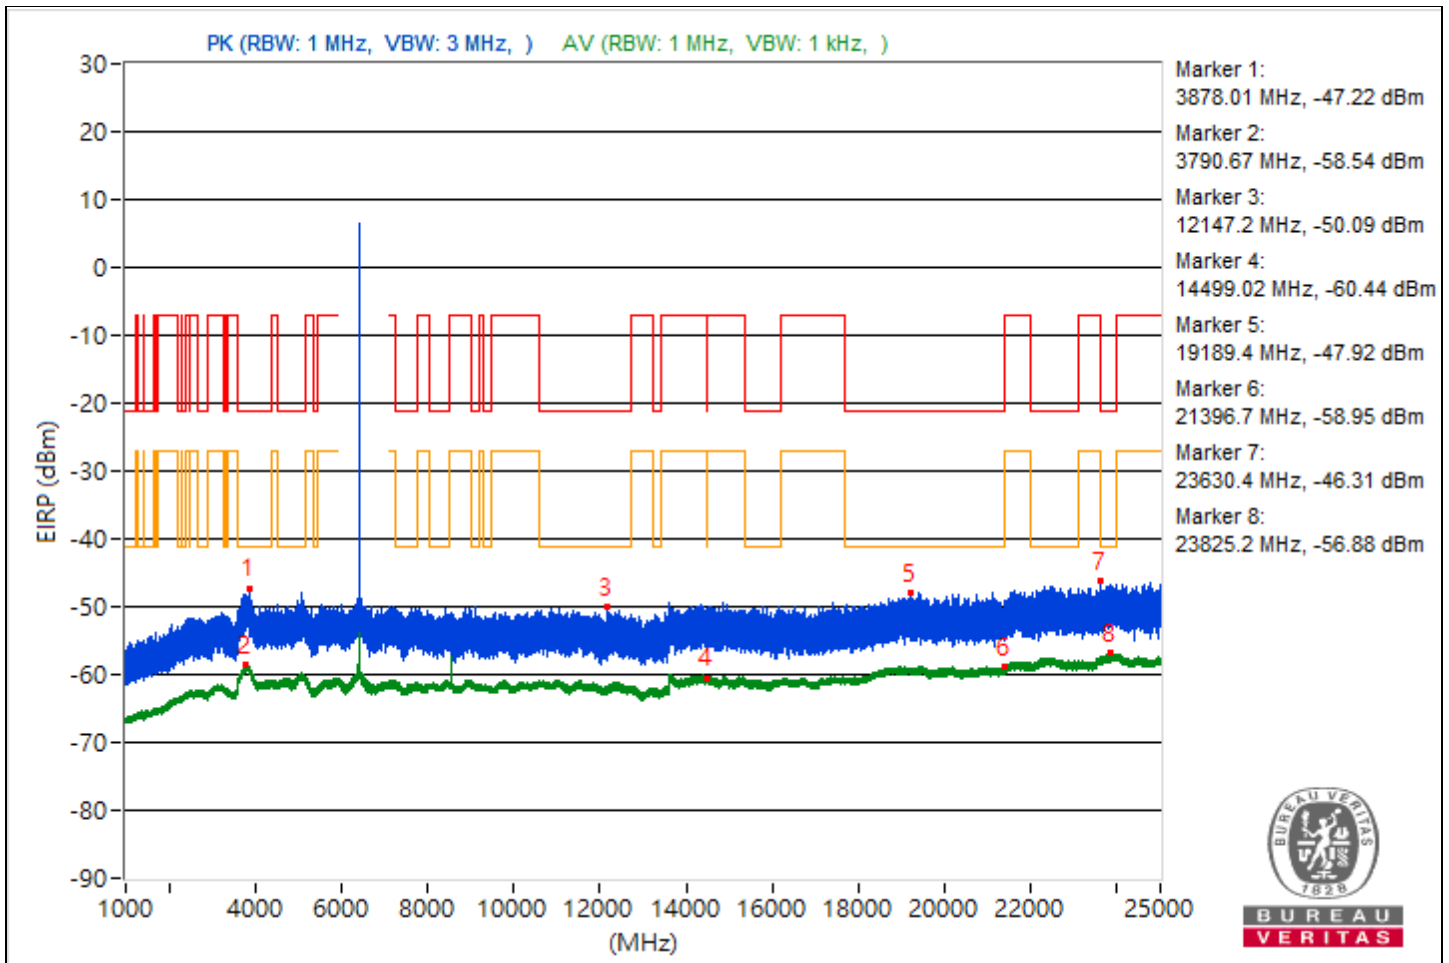

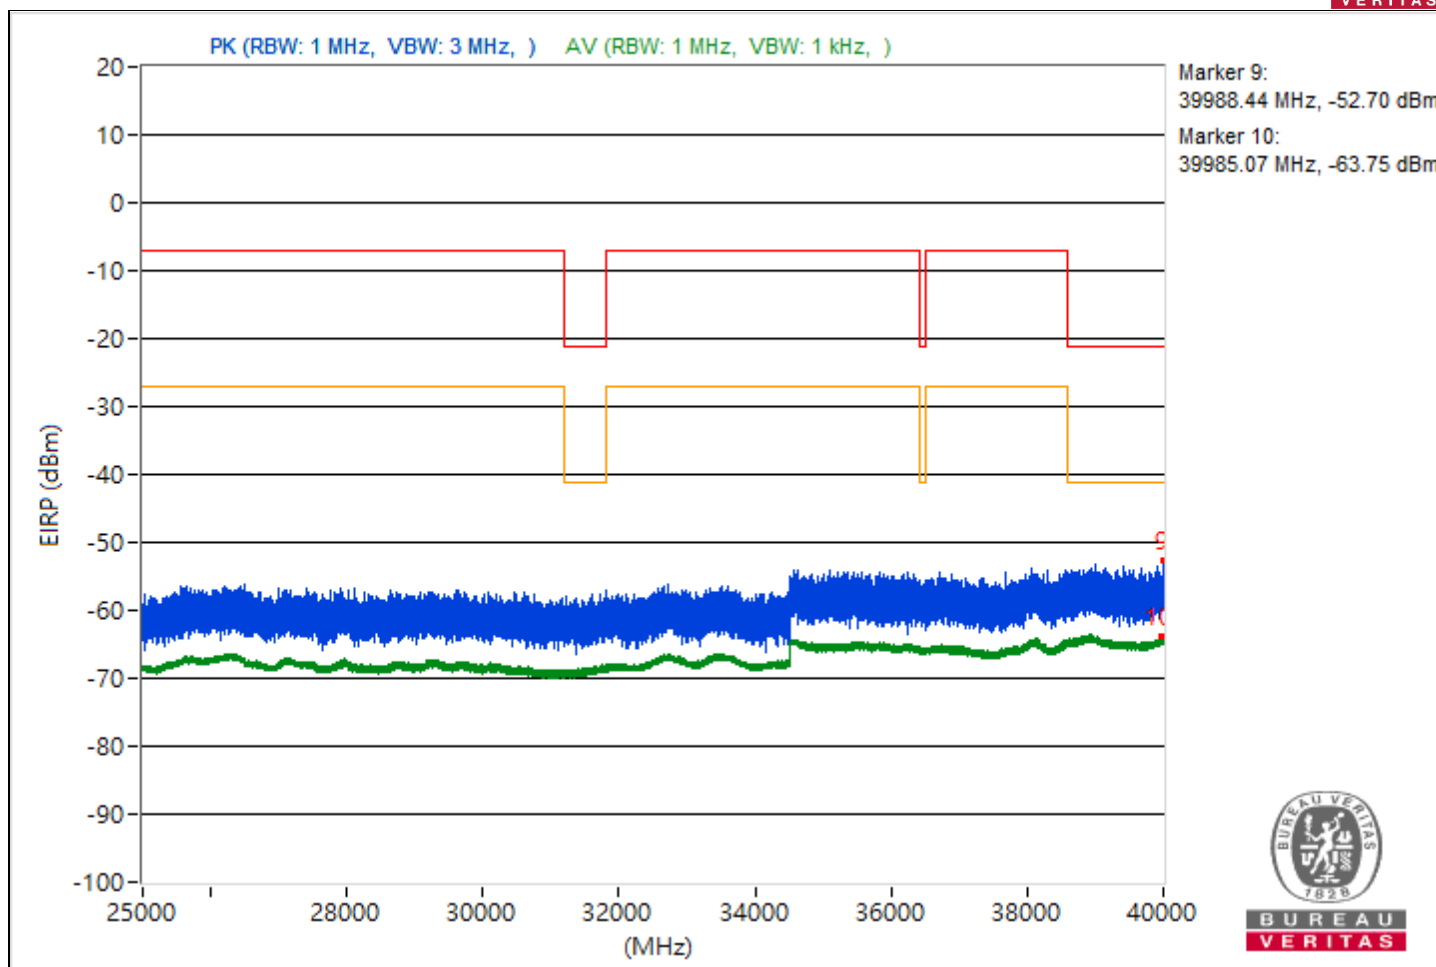





RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4698.1	46.77 PK	74	-27.23	-62.6	-53.97	4.92	-48.49
2	3812.91	36.84 AV	54	-17.16	-67.68	-65.33	4.92	-58.42
3	15599.64	45.98 PK	74	-28.02	-55.63	-59.71	4.92	-49.28
4	14480.71	34.39 AV	54	-19.61	-69.76	-68.02	4.92	-60.87
5	19461.5	47.36 PK	74	-26.64	-59.14	-53.97	4.92	-47.9
6	21209.4	36.43 AV	54	-17.57	-66.16	-67.47	4.92	-58.83
7	23843.2	48.93 PK	74	-25.07	-57.08	-52.57	4.92	-46.33
8	23894.4	38.27 AV	54	-15.73	-65.03	-64.82	4.92	-56.99
9	38923.11	41.37 PK	74	-32.63	-65.76	-59.79	4.92	-53.89
10	39953.78	31.17 AV	54	-22.83	-74.07	-70.63	4.92	-64.09

Note: Margin value = Emission Level - Limit value

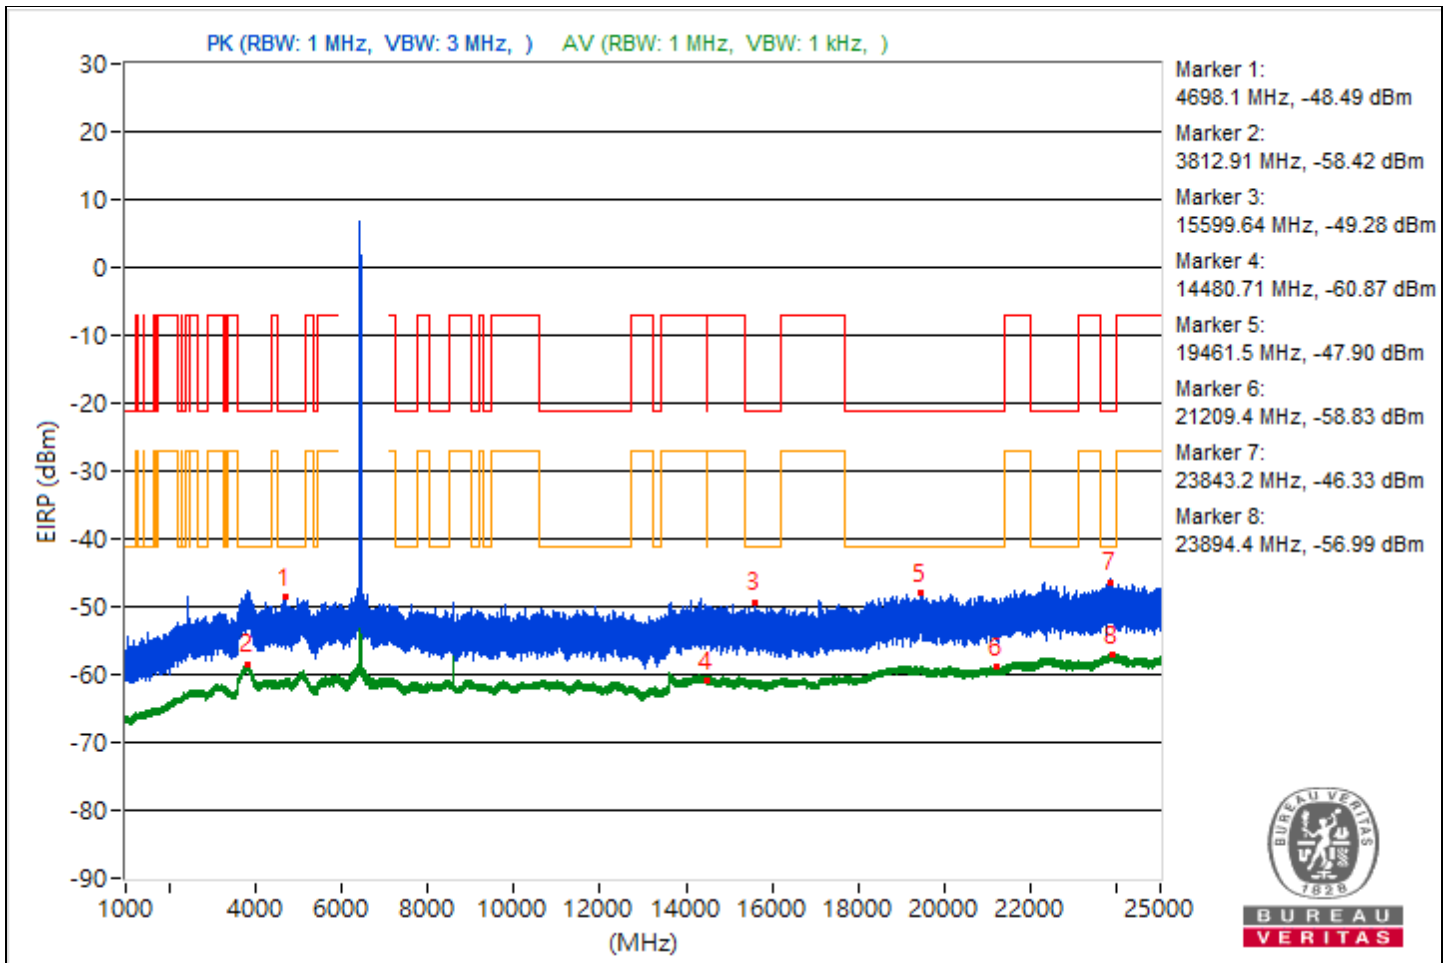

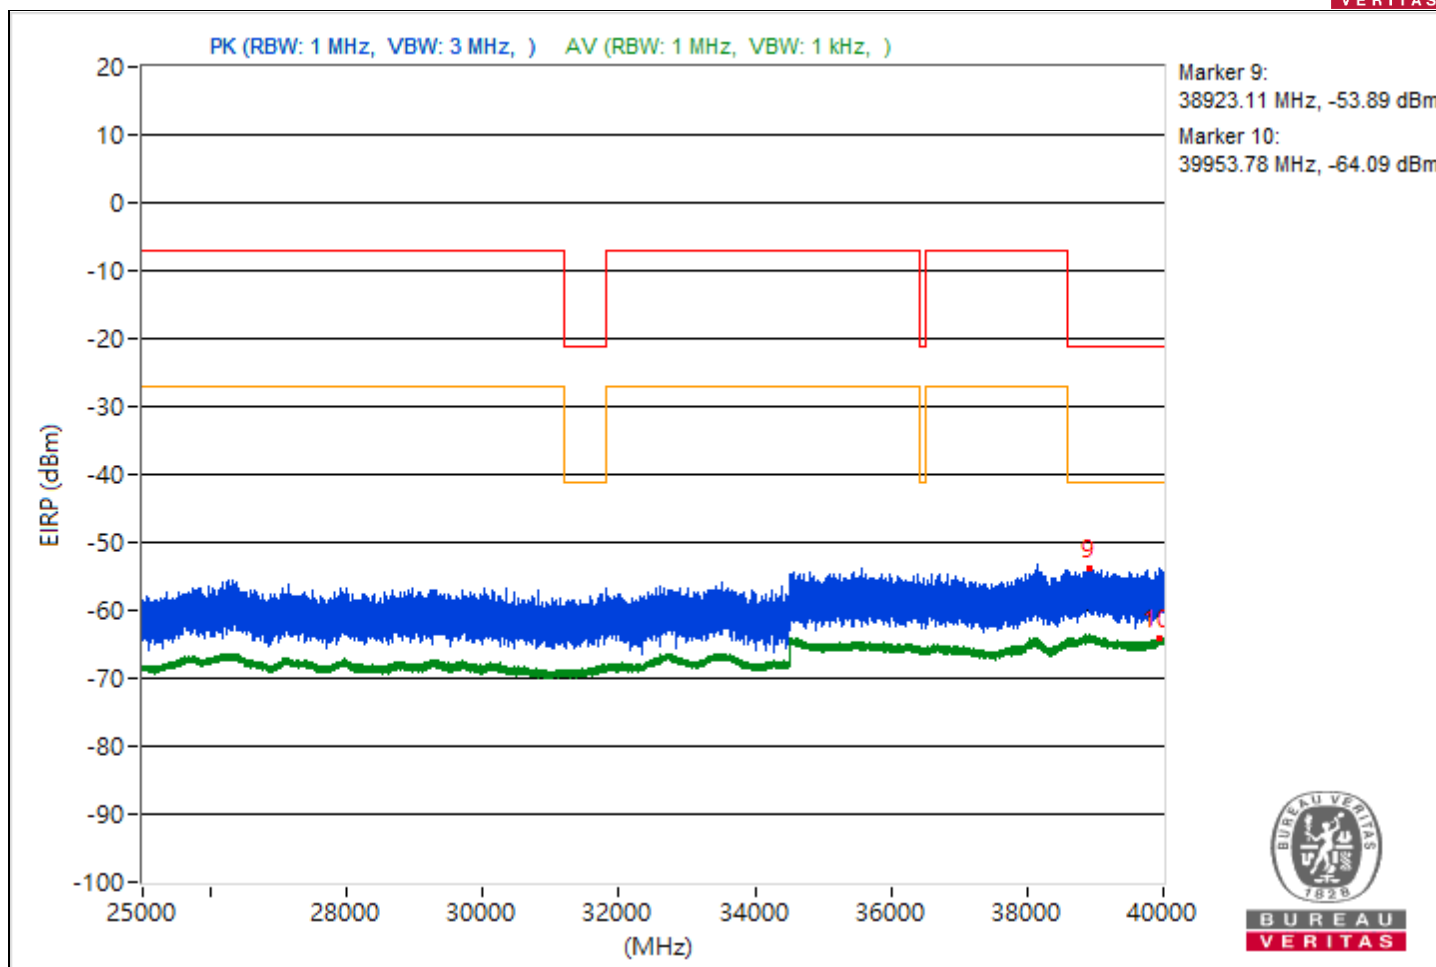





RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3734.74	47.55 PK	74	-26.45	-59.07	-53.75	4.92	-47.71
2	3822.63	36.66 AV	54	-17.34	-68.01	-65.43	4.92	-58.6
3	14484.89	46.05 PK	74	-27.95	-55.49	-59.84	4.92	-49.21
4	14473.51	34.88 AV	54	-19.12	-68.8	-67.87	4.92	-60.38
5	18641.3	46.67 PK	74	-27.33	-54.28	-61.4	4.92	-48.59
6	19489	36.14 AV	54	-17.86	-67.99	-66.28	4.92	-59.12
7	22363.9	48.32 PK	74	-25.68	-52.78	-59.05	4.92	-46.94
8	23890	38.29 AV	54	-15.71	-65.85	-64.13	4.92	-56.97
9	39989.07	42.84 PK	74	-31.16	-64.35	-58.3	4.92	-52.42
10	39974.93	31.36 AV	54	-22.64	-73.64	-70.55	4.92	-63.9

Note: Margin value = Emission Level - Limit value

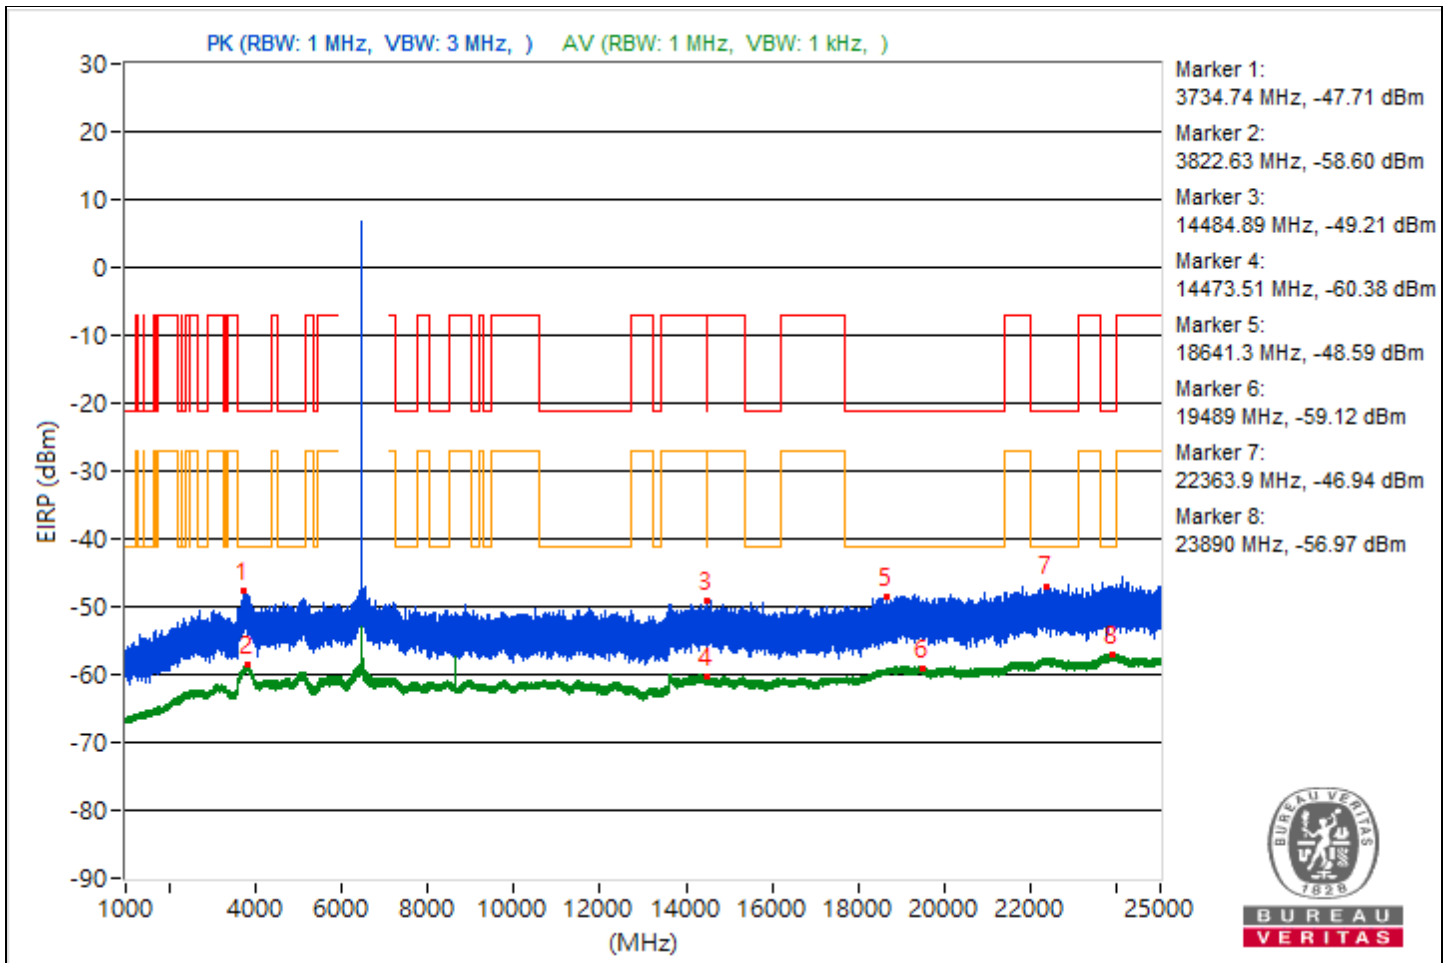

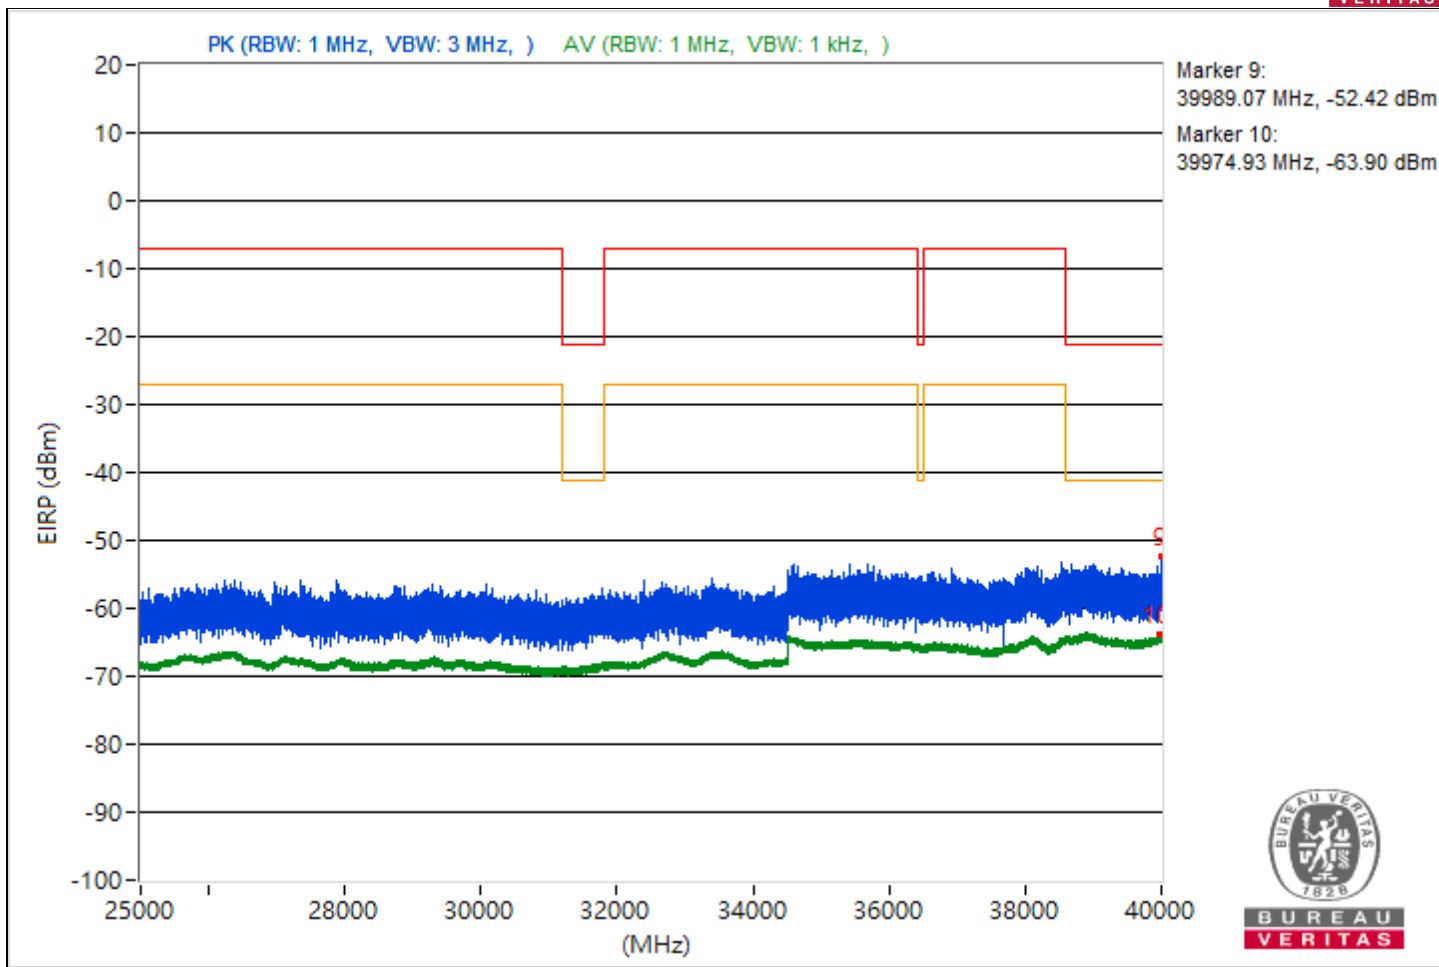





RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3869.22	46.93 PK	74	-27.07	-61.15	-54.02	4.92	-48.33
2	3809.64	36.6 AV	54	-17.4	-67.29	-65.99	4.92	-58.66
3	11469.51	45.36 PK	74	-28.64	-55.95	-61.2	4.92	-49.9
4	14472.44	35 AV	54	-19	-68.51	-67.9	4.92	-60.26
5	19322.5	47.01 PK	74	-26.99	-58.57	-54.64	4.92	-48.25
6	20080.1	36.33 AV	54	-17.67	-67.5	-66.3	4.92	-58.93
7	23851.5	49.3 PK	74	-24.7	-57.62	-51.91	4.92	-45.96
8	23862.1	38.01 AV	54	-15.99	-66.47	-64.18	4.92	-57.25
9	38874.58	41.4 PK	74	-32.6	-60.13	-64.53	4.92	-53.86
10	39993.96	31.6 AV	54	-22.4	-73.27	-70.38	4.92	-63.66

Note: Margin value = Emission Level - Limit value

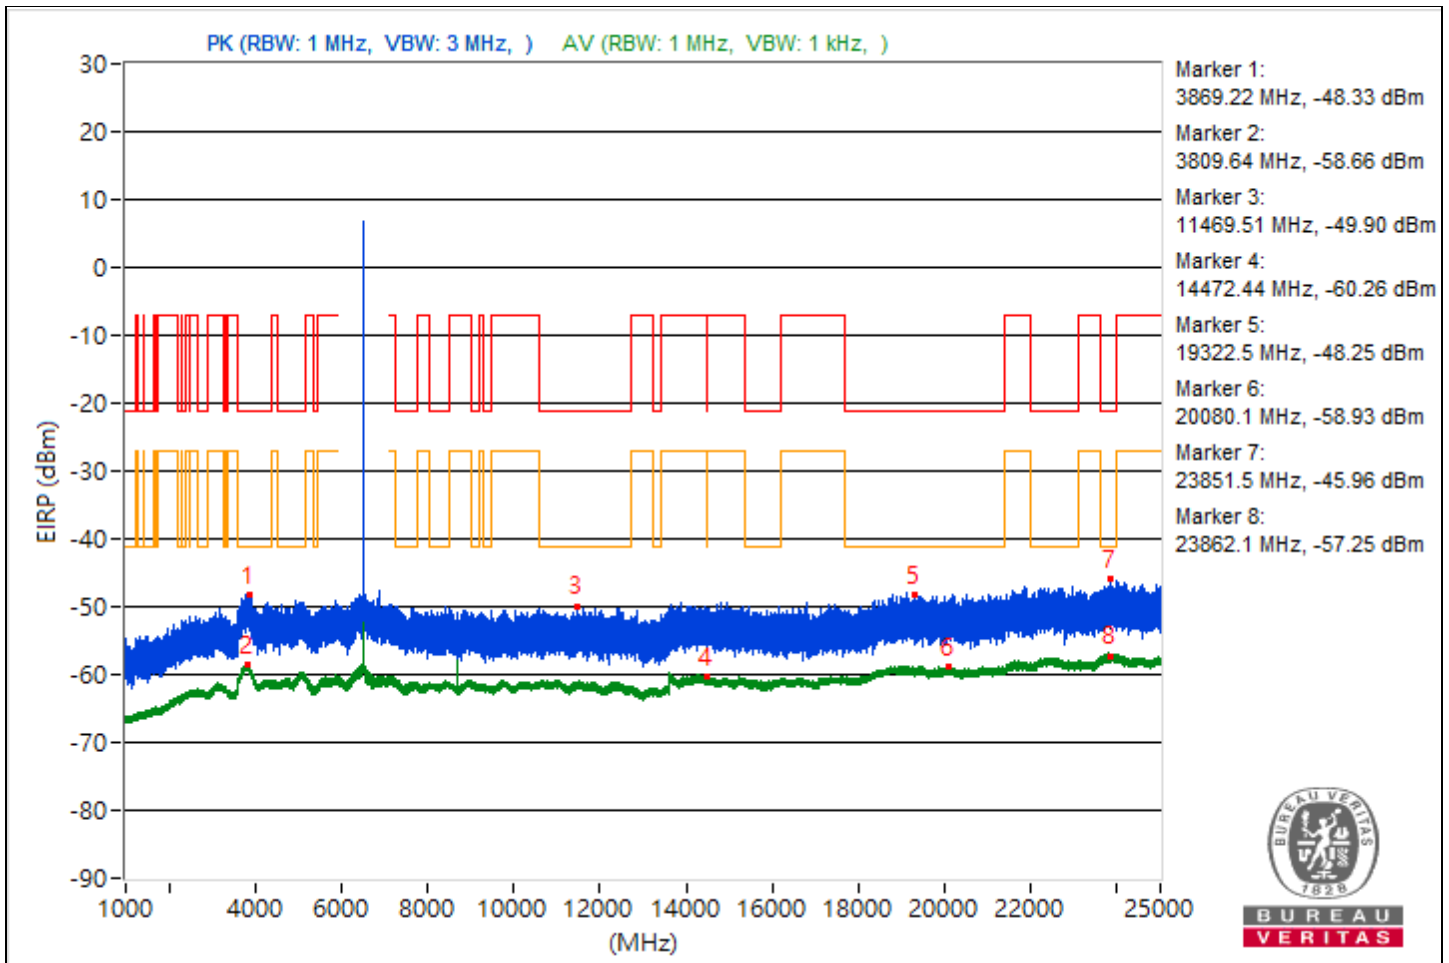


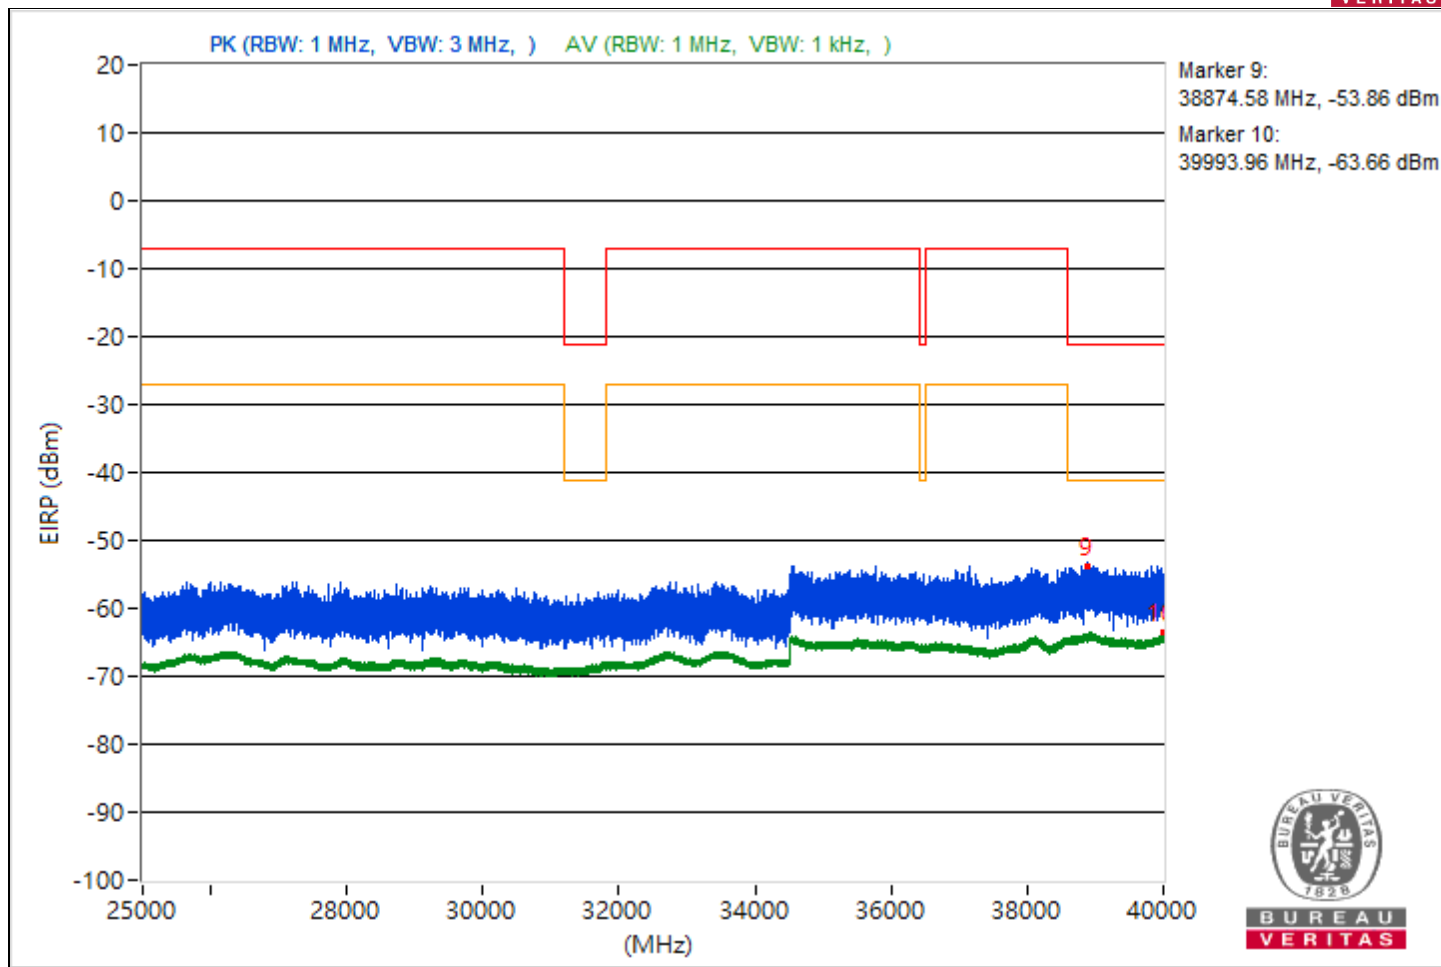


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.46	46.8 PK	74	-27.2	-60	-54.44	4.92	-48.46
2	3798.13	36.76 AV	54	-17.24	-67.53	-65.56	4.92	-58.5
3	11520.27	45.75 PK	74	-28.25	-60.91	-55.53	4.92	-49.51
4	14492.44	34.75 AV	54	-19.25	-69.13	-67.84	4.92	-60.51
5	20066.2	47.67 PK	74	-26.33	-57.42	-54.2	4.92	-47.59
6	19450.6	36.54 AV	54	-17.46	-67.33	-66.06	4.92	-58.72
7	22177.9	48.79 PK	74	-25.21	-52.55	-57.71	4.92	-46.47
8	23907.1	38.57 AV	54	-15.43	-65.15	-64.16	4.92	-56.69
9	39260.18	41.77 PK	74	-32.23	-64.28	-59.71	4.92	-53.49
10	38836.36	31.52 AV	54	-22.48	-71.5	-71.86	4.92	-63.74

Note: Margin value = Emission Level - Limit value

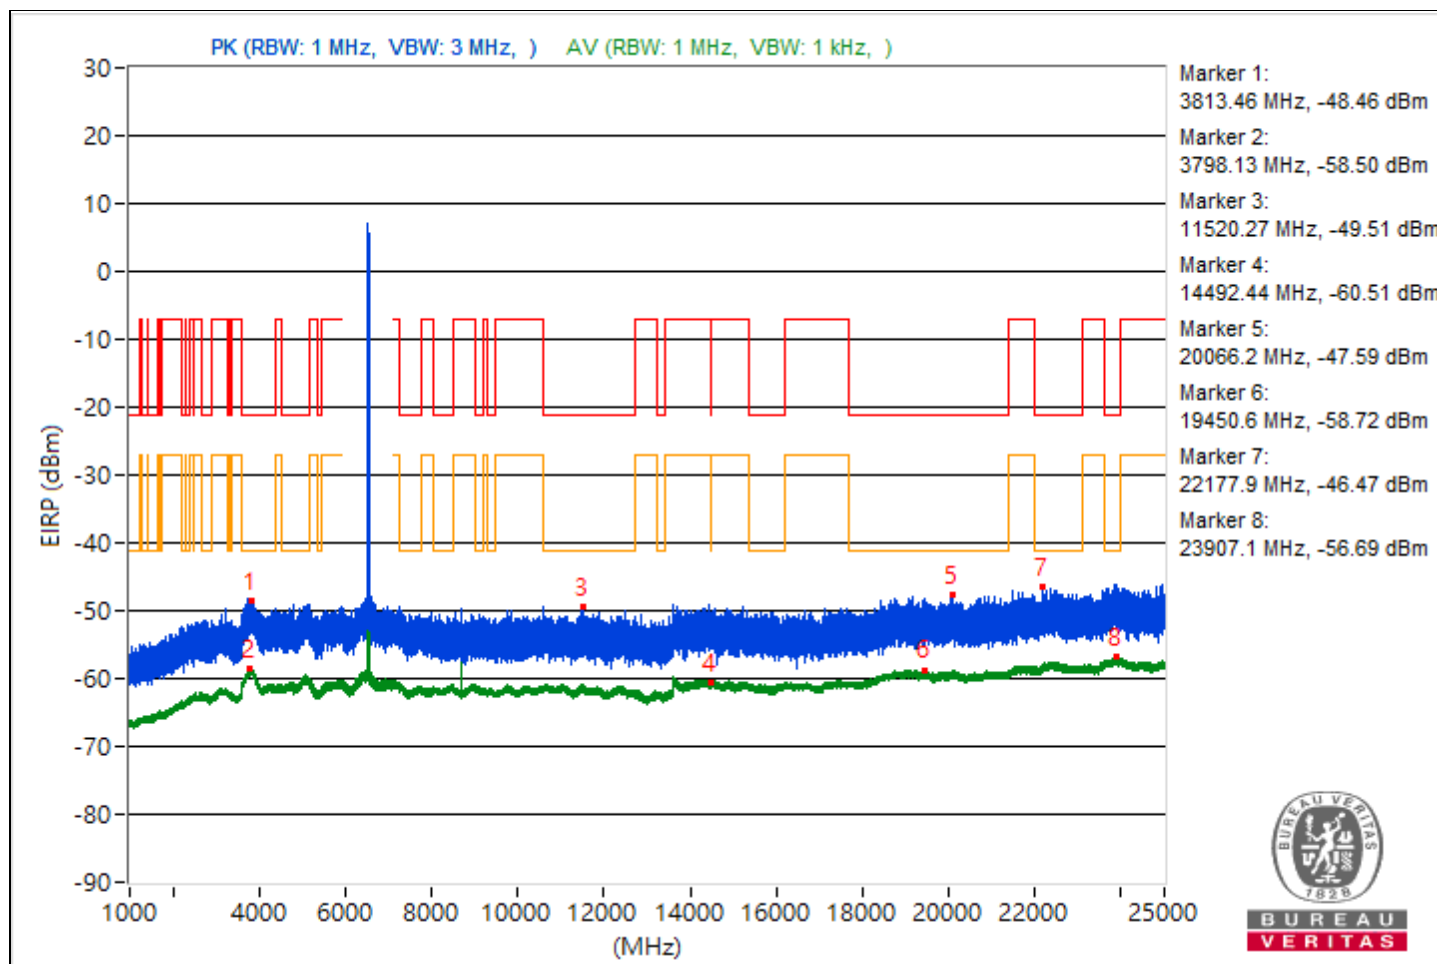

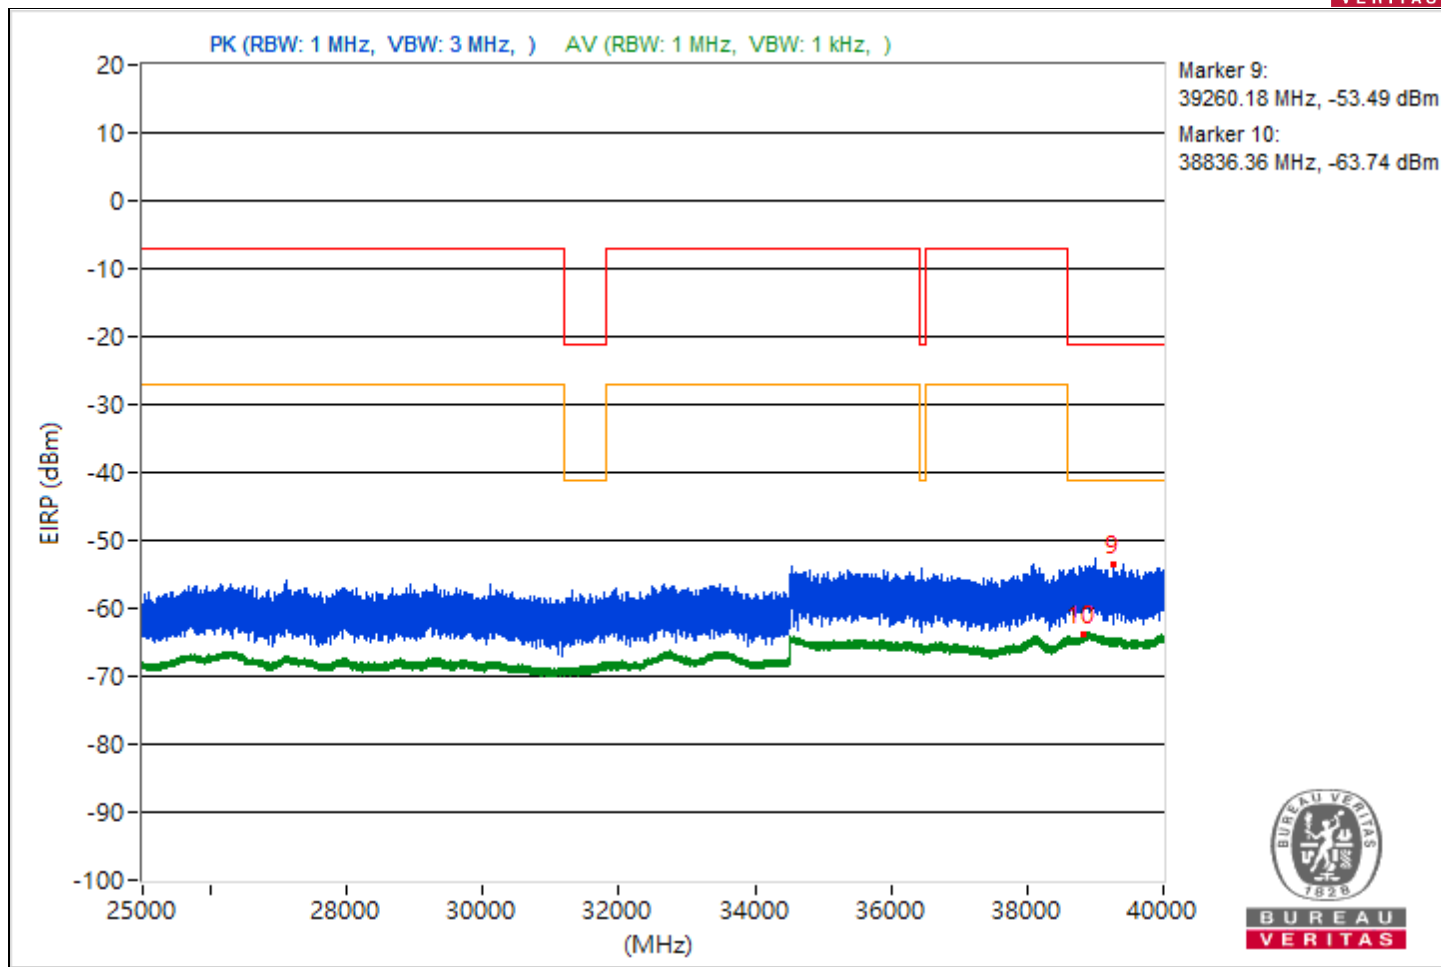





RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3852.42	46.66 PK	74	-27.34	-60.07	-54.6	4.92	-48.6
2	3815.94	36.57 AV	54	-17.43	-68	-65.58	4.92	-58.69
3	7326.76	45.86 PK	74	-28.14	-55.44	-60.74	4.92	-49.4
4	14492.98	34.81 AV	54	-19.19	-68.86	-67.95	4.92	-60.45
5	18991.1	47.38 PK	74	-26.62	-59.49	-53.85	4.92	-47.88
6	21390	36.34 AV	54	-17.66	-66.29	-67.49	4.92	-58.92
7	23936.5	48.82 PK	74	-25.18	-52.35	-58.29	4.92	-46.44
8	23870.9	38.16 AV	54	-15.84	-66.1	-64.18	4.92	-57.1
9	39458.49	41.72 PK	74	-32.28	-67.12	-59.09	4.92	-53.54
10	38923.02	31.67 AV	54	-22.33	-72.63	-70.63	4.92	-63.59

Note: Margin value = Emission Level - Limit value

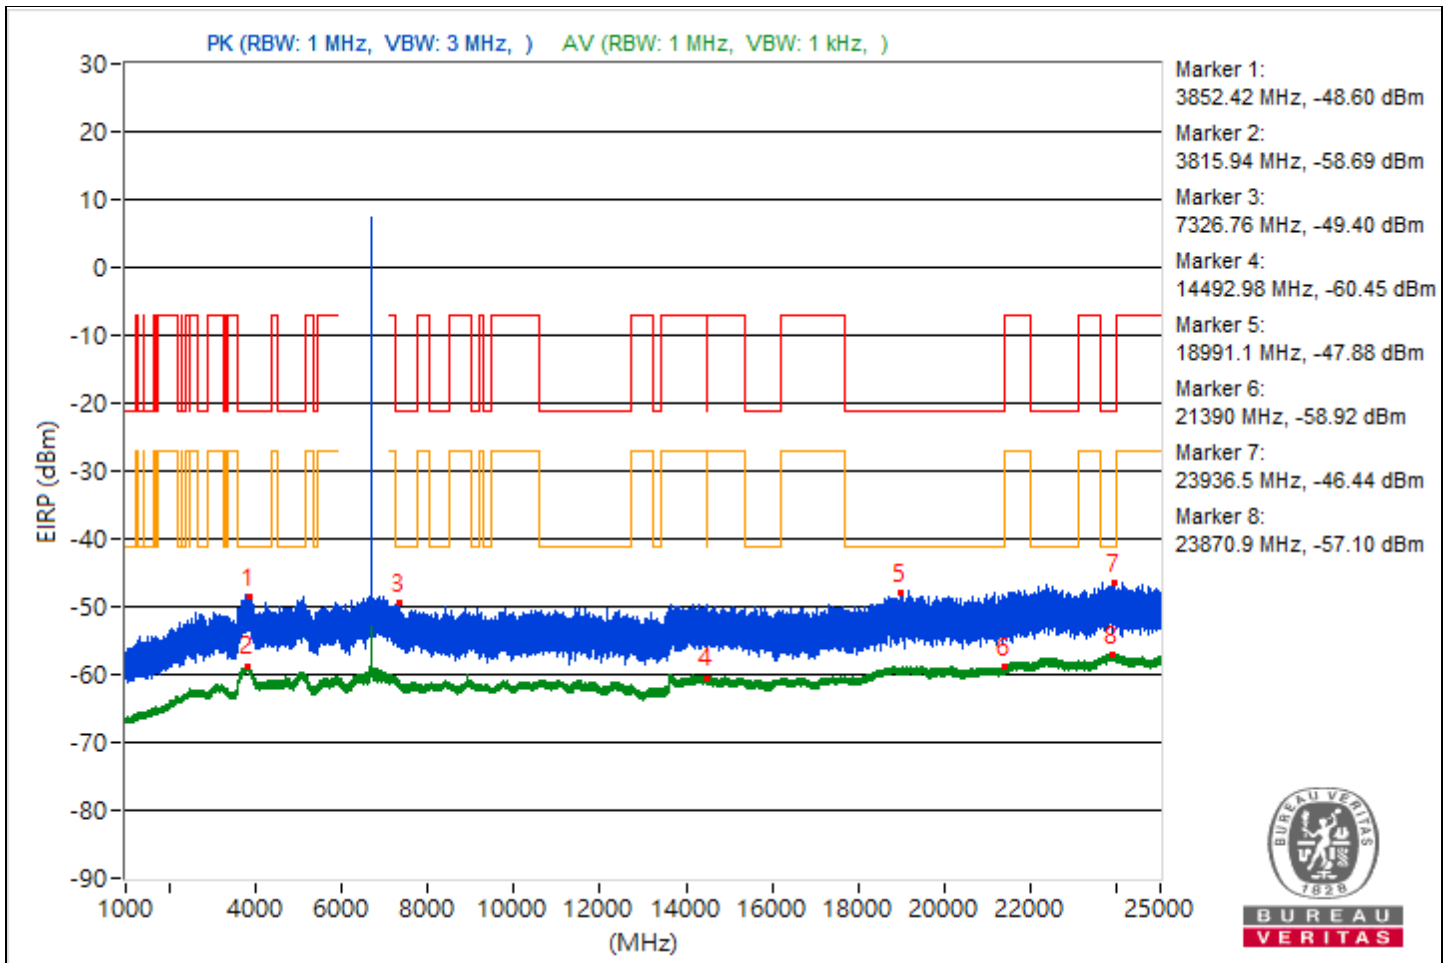

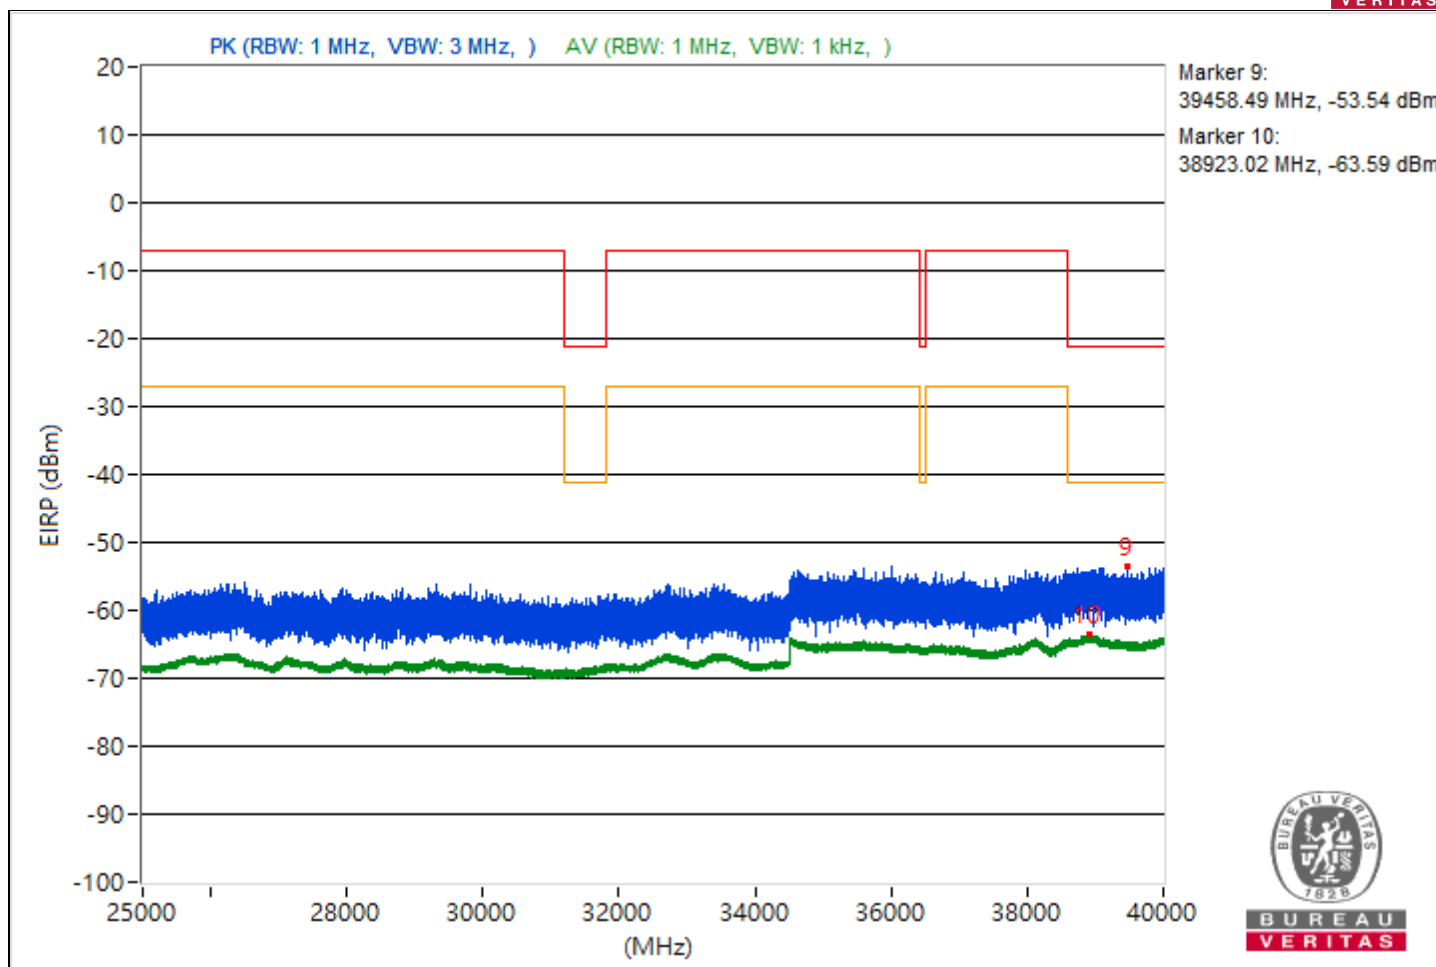





RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.23	47.7 PK	74	-26.3	-57.55	-54.1	4.92	-47.56
2	3817.66	36.67 AV	54	-17.33	-67.84	-65.51	4.92	-58.59
3	7260.18	45.13 PK	74	-28.87	-56.13	-61.61	4.92	-50.13
4	7266.17	34.78 AV	54	-19.22	-67.78	-69.15	4.92	-60.48
5	18932.2	47.27 PK	74	-26.73	-53.93	-59.71	4.92	-47.99
6	21136.2	36.21 AV	54	-17.79	-66.19	-67.94	4.92	-59.05
7	22095.8	48.37 PK	74	-25.63	-53.46	-56.81	4.92	-46.89
8	23881.7	38.36 AV	54	-15.64	-65.57	-64.2	4.92	-56.9
9	38981.96	41.71 PK	74	-32.29	-67.07	-59.12	4.92	-53.55
10	38861.69	31.61 AV	54	-22.39	-71.55	-71.61	4.92	-63.65

Note: Margin value = Emission Level - Limit value

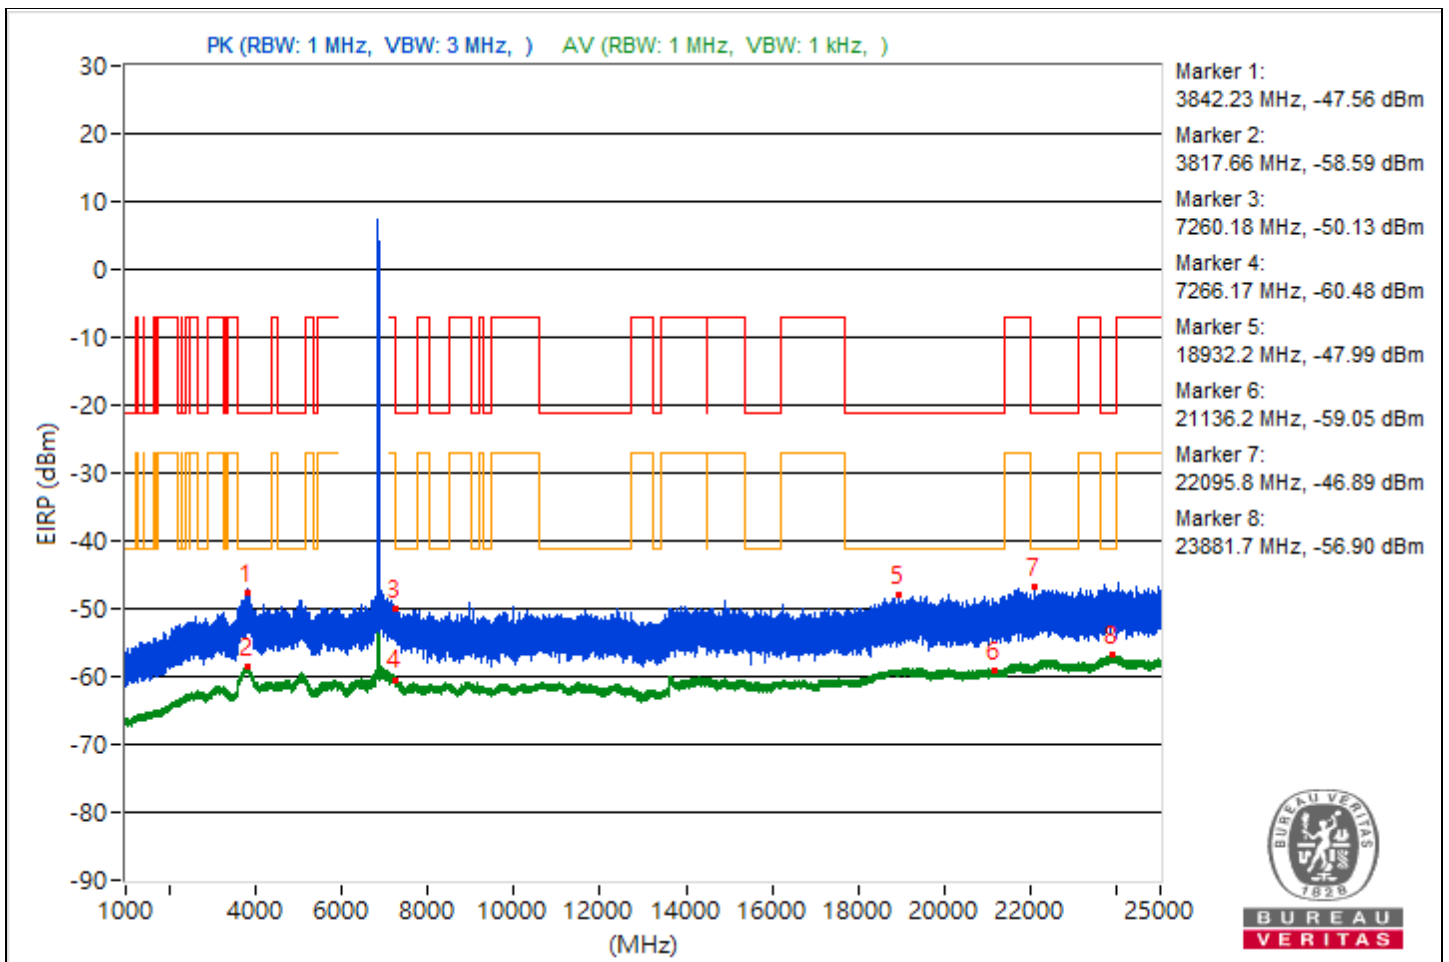

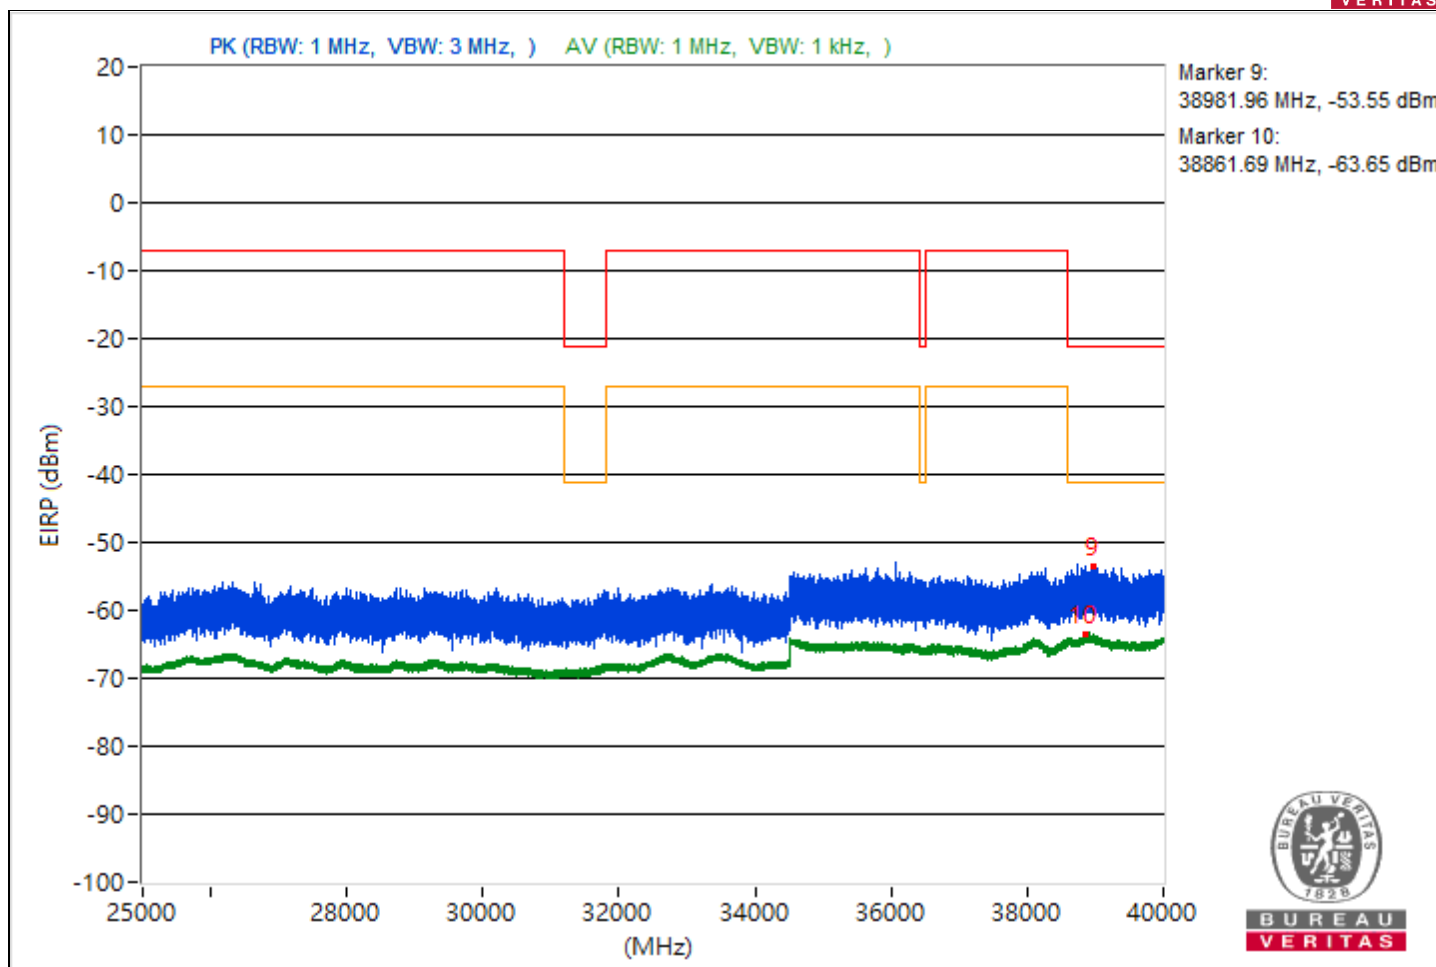





RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3886.49	46.65 PK	74	-27.35	-60.97	-54.39	4.92	-48.61
2	3818.51	36.75 AV	54	-17.25	-67.88	-65.37	4.92	-58.51
3	11392	45.53 PK	74	-28.47	-56.36	-59.53	4.92	-49.73
4	7255.98	35.09 AV	54	-18.91	-67.51	-68.78	4.92	-60.17
5	20771.6	47.15 PK	74	-26.85	-58.85	-54.35	4.92	-48.11
6	19420.8	36.17 AV	54	-17.83	-67.78	-66.37	4.92	-59.09
7	23814.9	48.86 PK	74	-25.14	-59.99	-51.96	4.92	-46.4
8	23895.8	38.24 AV	54	-15.76	-66.07	-64.06	4.92	-57.02
9	38957.69	42.06 PK	74	-31.94	-66.26	-58.84	4.92	-53.2
10	38858.67	31.45 AV	54	-22.55	-71.43	-72.07	4.92	-63.81

Note: Margin value = Emission Level - Limit value

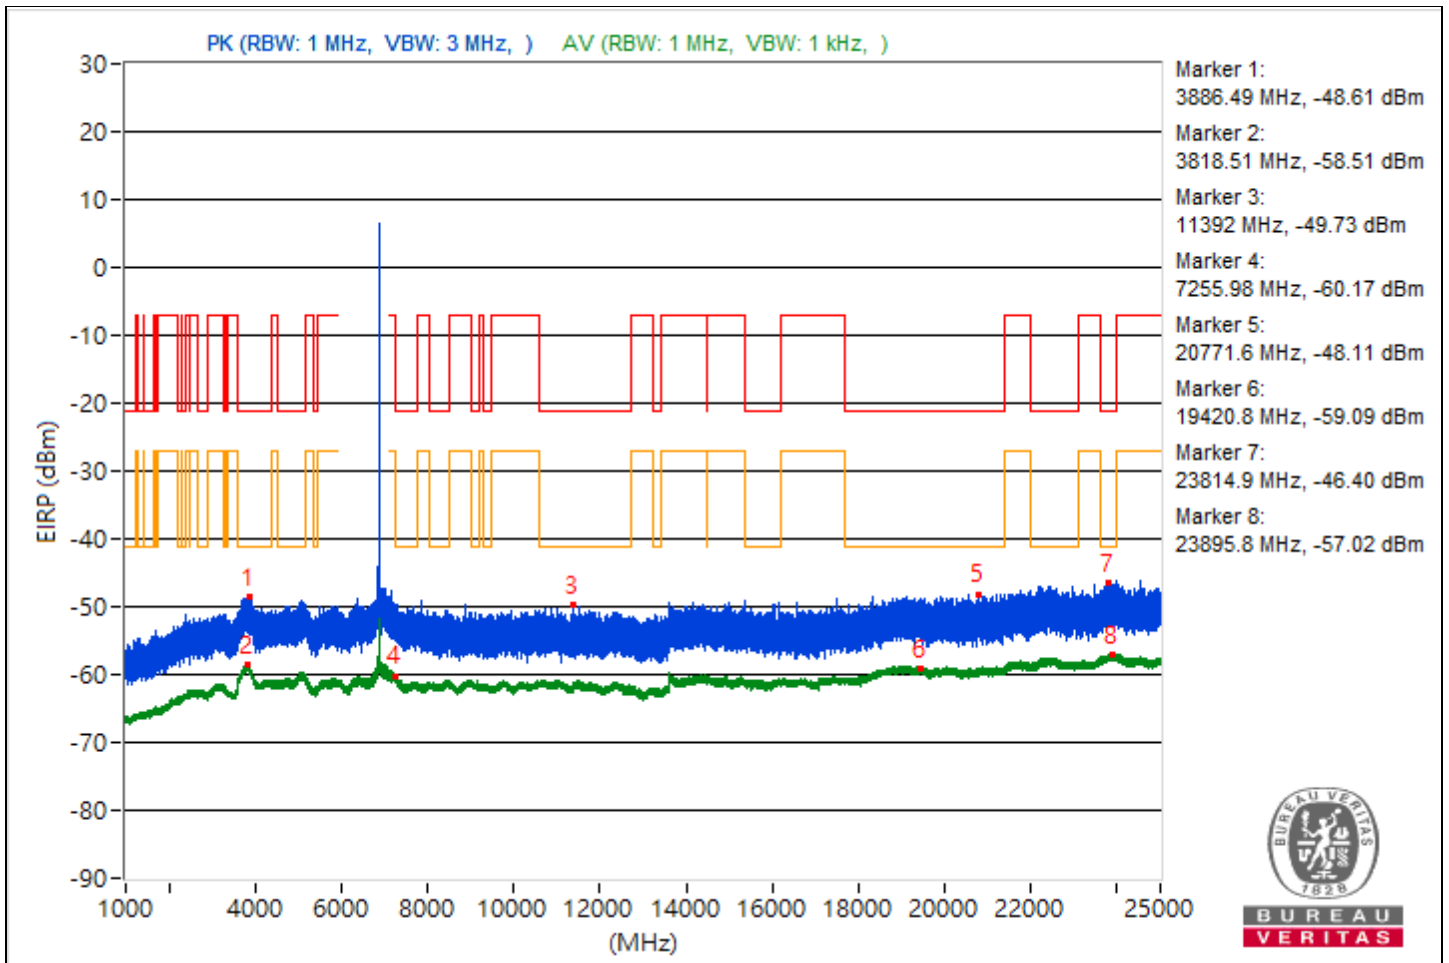

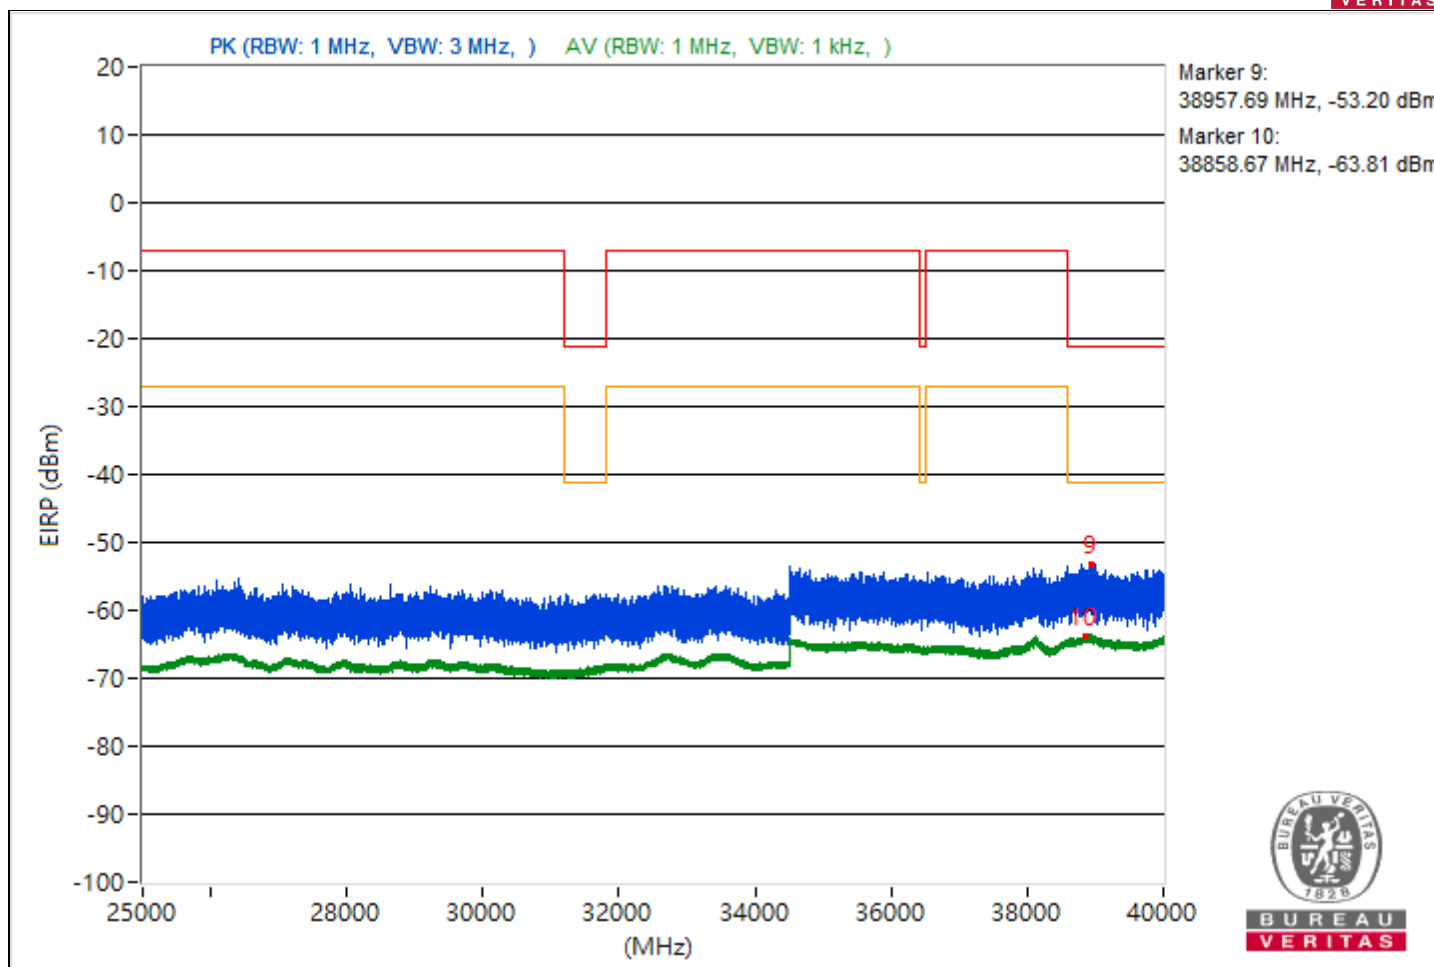





RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3879.02	46.97 PK	74	-27.03	-61.79	-53.85	4.92	-48.29
2	3813.38	36.8 AV	54	-17.2	-67.03	-65.83	4.92	-58.46
3	7257.07	46.36 PK	74	-27.64	-59.93	-55.04	4.92	-48.9
4	7251.54	35.83 AV	54	-18.17	-66.5	-68.42	4.92	-59.43
5	19338.5	48.03 PK	74	-25.97	-58.14	-53.41	4.92	-47.23
6	18970.5	36.36 AV	54	-17.64	-67.4	-66.32	4.92	-58.9
7	22492.1	48.8 PK	74	-25.2	-57.13	-52.73	4.92	-46.46
8	23843.6	38.19 AV	54	-15.81	-66	-64.18	4.92	-57.07
9	39954.67	42.12 PK	74	-31.88	-65.24	-58.99	4.92	-53.14
10	38826.84	31.46 AV	54	-22.54	-71.27	-72.26	4.92	-63.8

Note: Margin value = Emission Level - Limit value

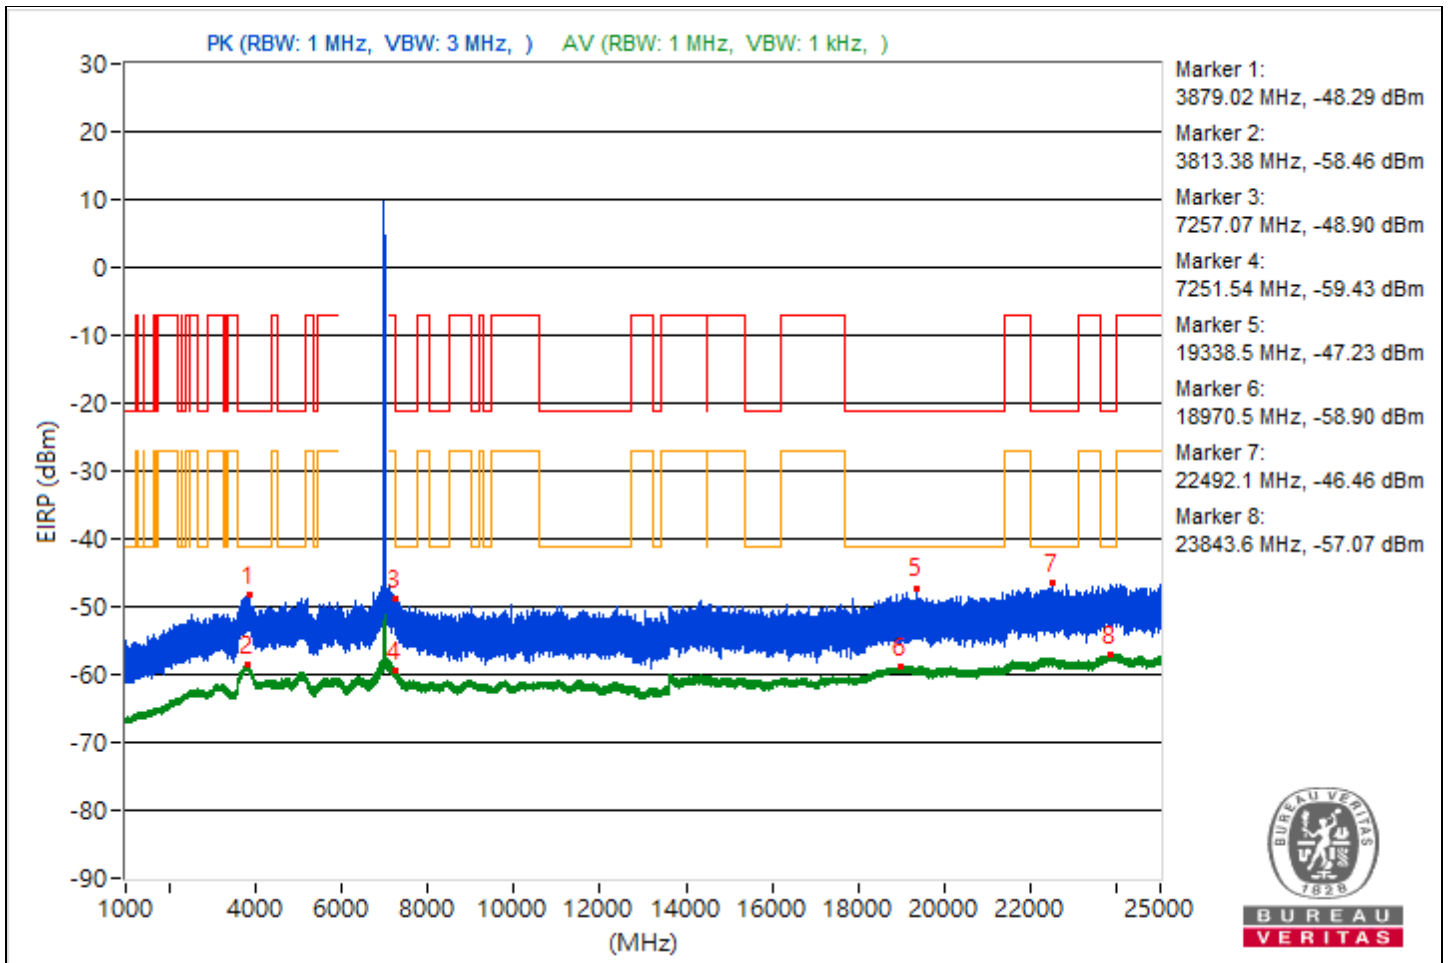

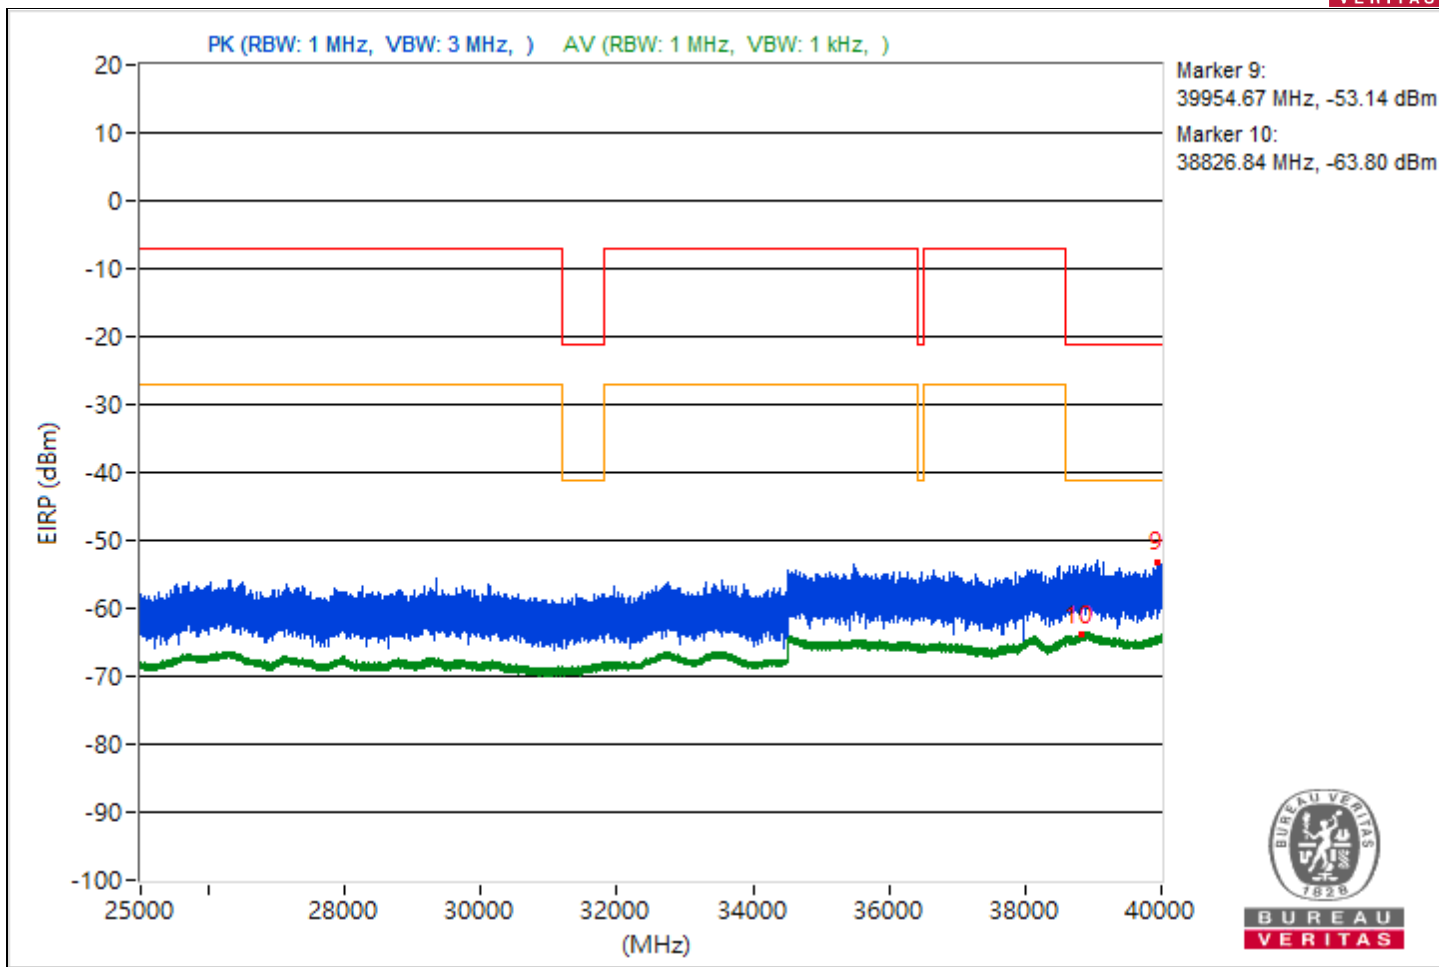





RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3871.09	46.13 PK	74	-27.87	-59.99	-55.32	4.92	-49.13
2	3819.29	35.72 AV	54	-18.28	-67.66	-67.28	4.92	-59.54
3	7268.58	46.51 PK	74	-27.49	-60.73	-54.63	4.92	-48.75
4	7250.61	36.04 AV	54	-17.96	-69.22	-65.75	4.92	-59.22
5	20510.2	46.84 PK	74	-27.16	-54.14	-61.09	4.92	-48.42
6	21136.9	36.52 AV	54	-17.48	-66.37	-66.99	4.92	-58.74
7	22035.4	47.76 PK	74	-26.24	-53.75	-58.19	4.92	-47.5
8	22513.3	37.76 AV	54	-16.24	-65.85	-65.04	4.92	-57.5
9	38987.64	41.85 PK	74	-32.15	-59.2	-65.75	4.92	-53.41
10	38796.62	31.46 AV	54	-22.54	-71.78	-71.67	4.92	-63.8

Note: Margin value = Emission Level - Limit value

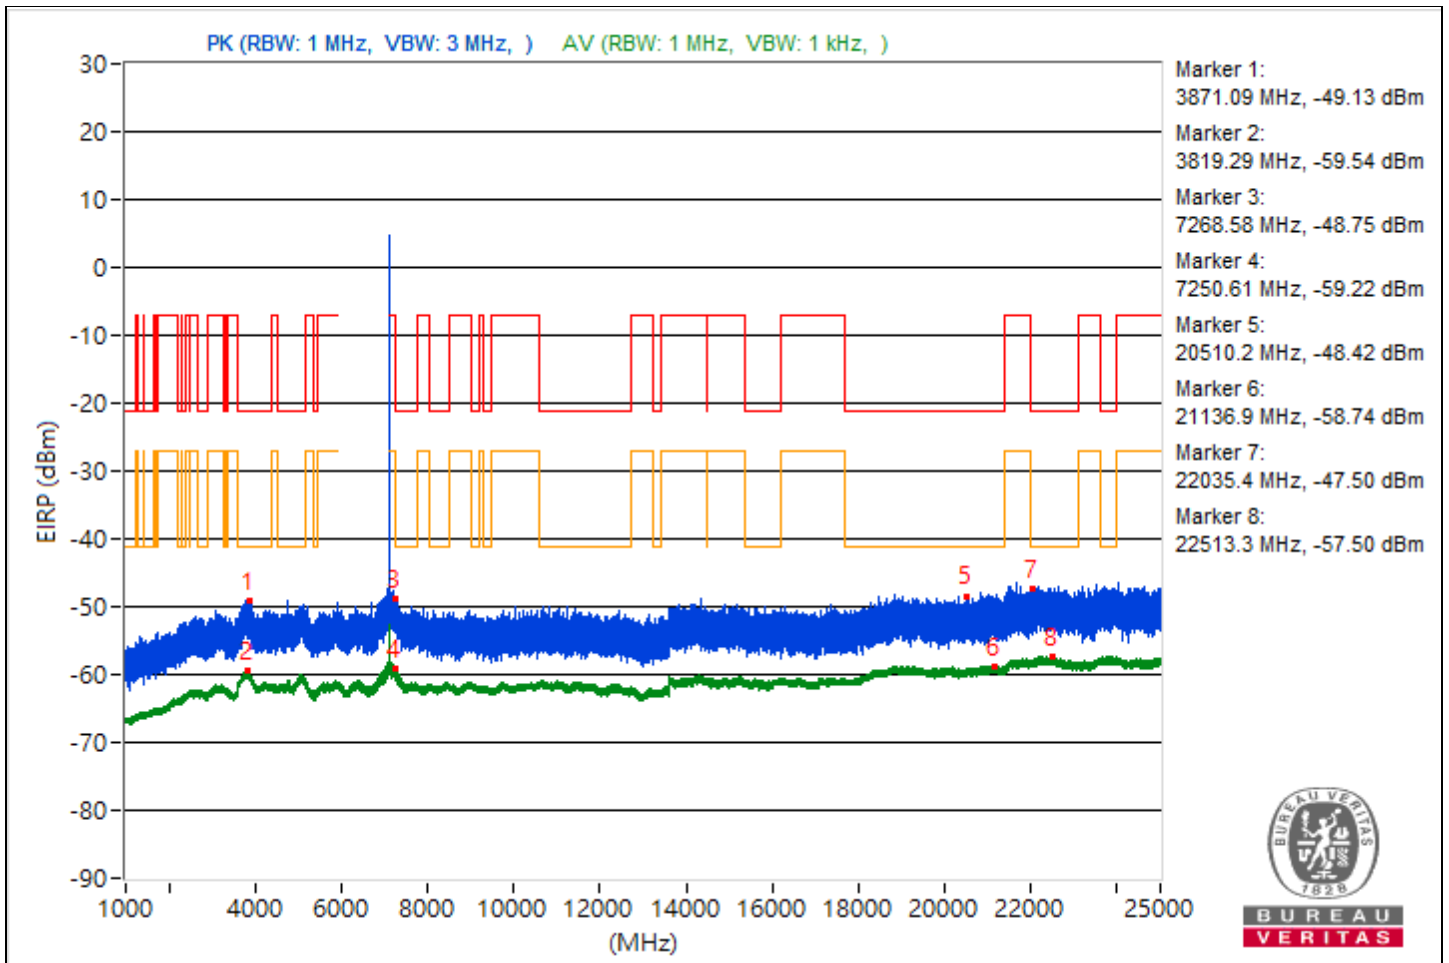

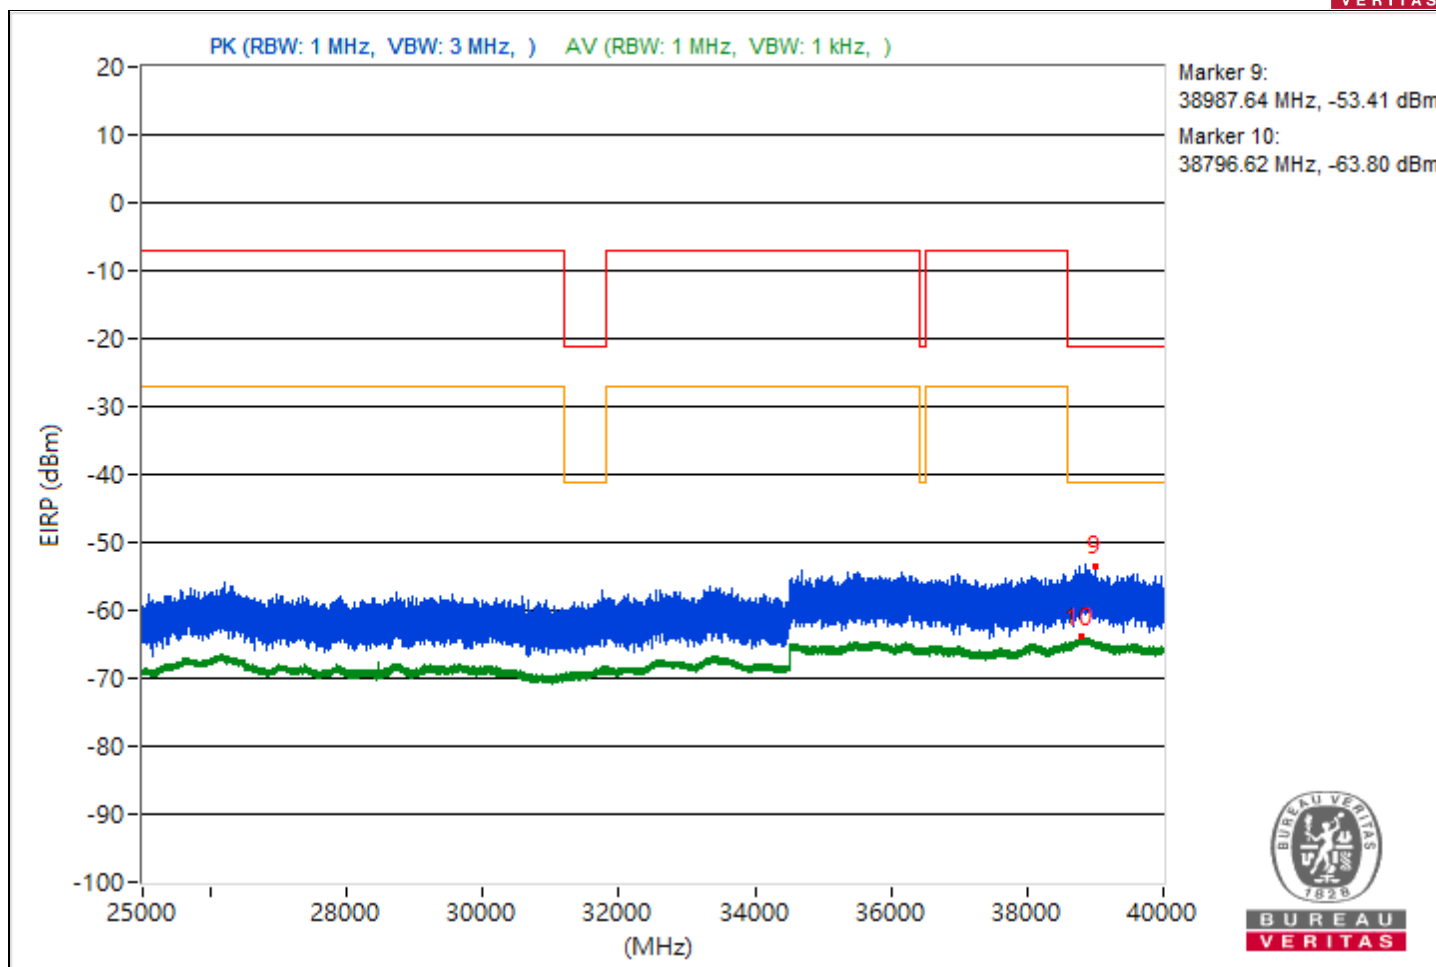





RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.82	46.27 PK	74	-27.73	-57.95	-56.09	4.92	-48.99
2	3813.77	35.67 AV	54	-18.33	-67.89	-67.17	4.92	-59.59
3	9196.27	45.88 PK	74	-28.12	-54.78	-64.09	4.92	-49.38
4	14491.73	34.77 AV	54	-19.23	-68.55	-68.29	4.92	-60.49
5	21050.8	47.12 PK	74	-26.88	-54.43	-58.74	4.92	-48.14
6	21132.5	36.68 AV	54	-17.32	-66.71	-66.33	4.92	-58.58
7	22177	48.63 PK	74	-25.37	-52.71	-57.85	4.92	-46.63
8	23649.3	37.82 AV	54	-16.18	-65.05	-65.72	4.92	-57.44
9	38935.56	41.45 PK	74	-32.55	-63.82	-60.34	4.92	-53.81
10	38849.42	31.17 AV	54	-22.83	-71.7	-72.36	4.92	-64.09

Note: Margin value = Emission Level - Limit value

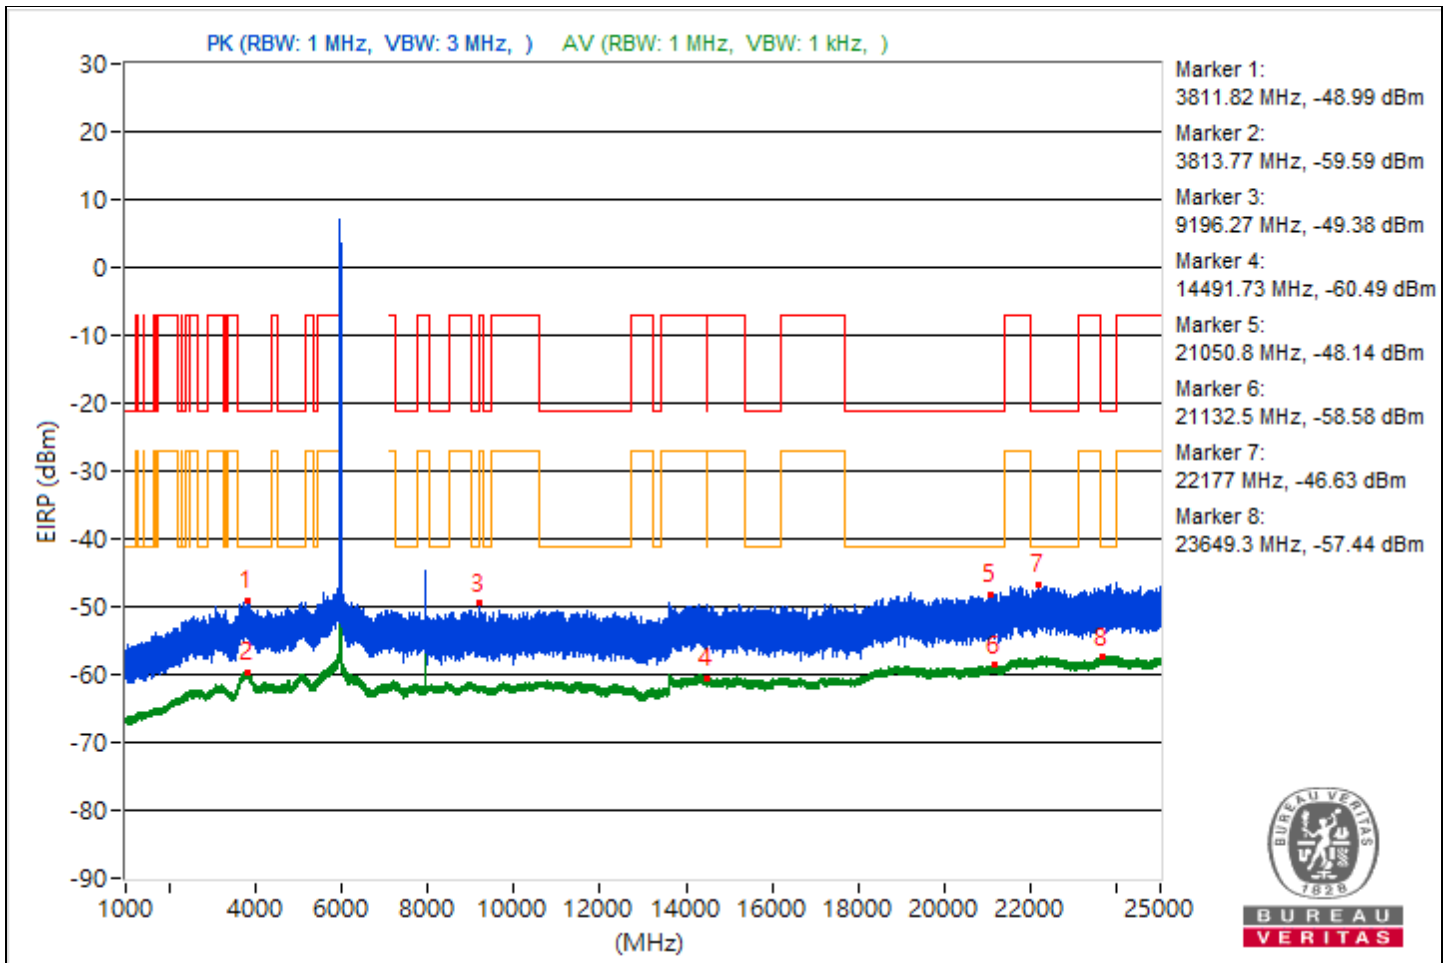

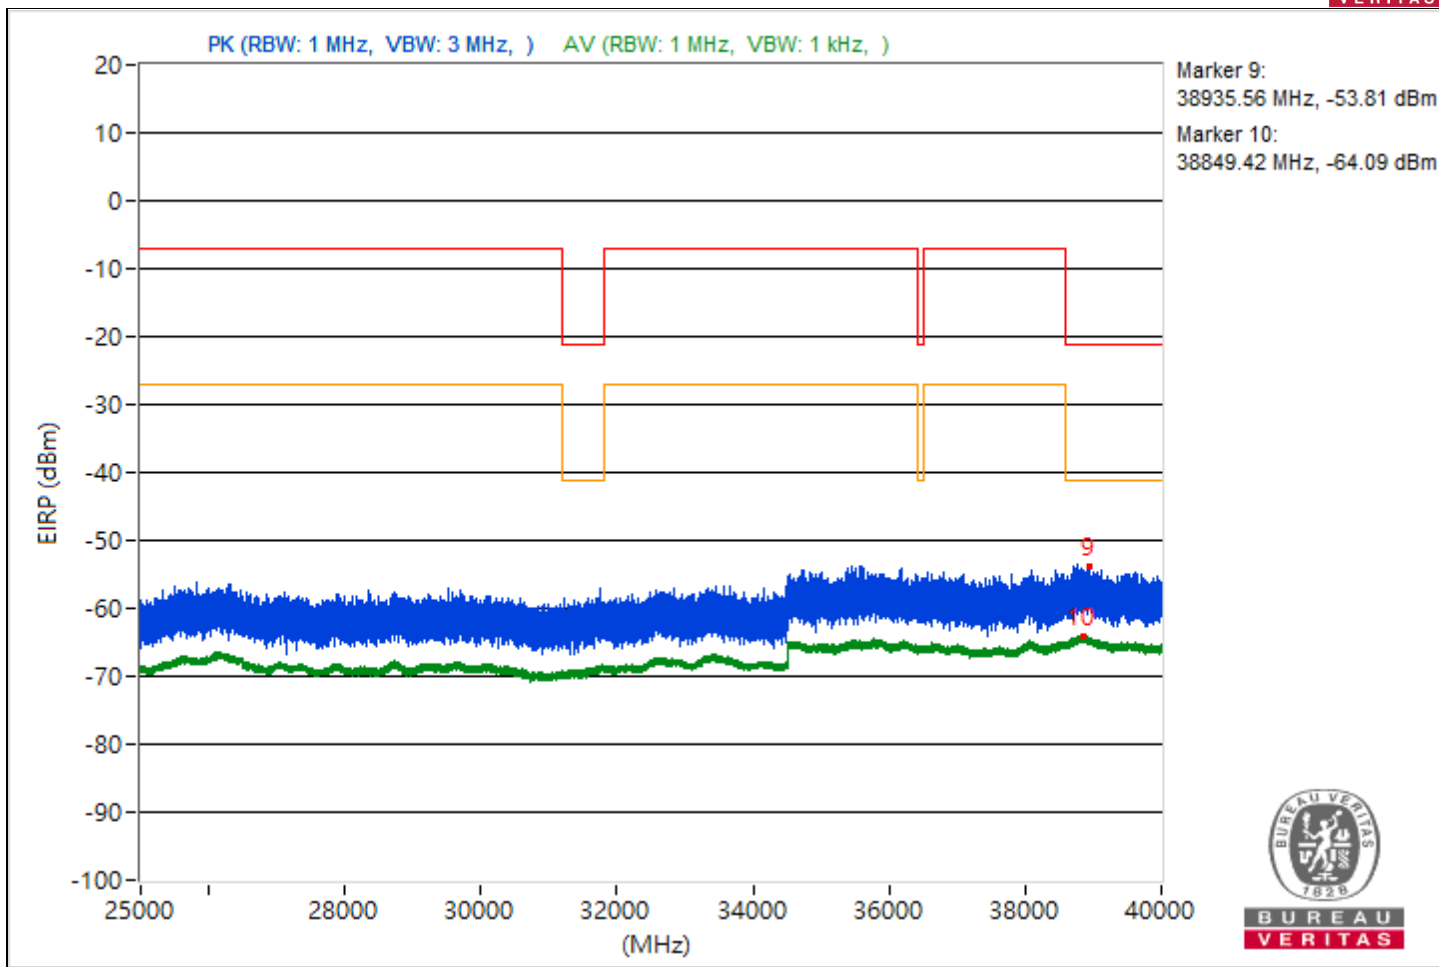





RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.83	46.93 PK	74	-27.07	-57.96	-55.04	4.92	-48.33
2	3795.8	35.78 AV	54	-18.22	-67.32	-67.5	4.92	-59.48
3	8220	49.25 PK	74	-24.75	-54.53	-53.42	4.92	-46.01
4	8220	45.5 AV	54	-8.5	-57.84	-57.56	4.92	-49.76
5	20018.5	47.14 PK	74	-26.86	-54.09	-59.72	4.92	-48.12
6	21037.7	36.51 AV	54	-17.49	-66.38	-67	4.92	-58.75
7	22257.4	48.25 PK	74	-25.75	-59.85	-52.7	4.92	-47.01
8	22265.9	38.02 AV	54	-15.98	-64.8	-65.57	4.92	-57.24
9	39641.96	41.02 PK	74	-32.98	-60.03	-66.59	4.92	-54.24
10	38830.84	31.31 AV	54	-22.69	-71.52	-72.27	4.92	-63.95

Note: Margin value = Emission Level - Limit value

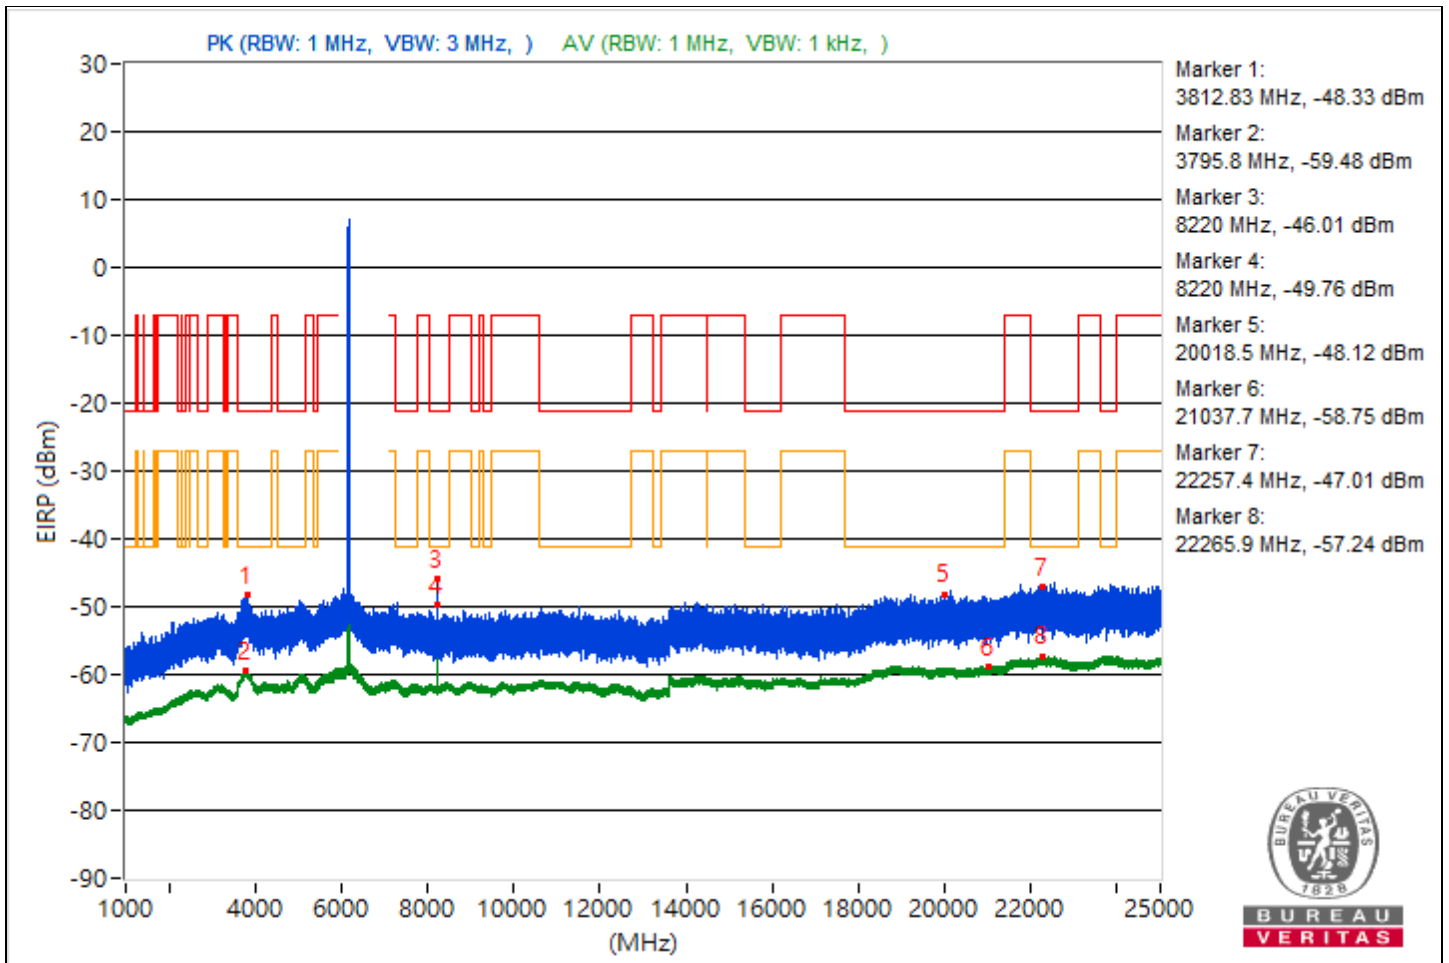

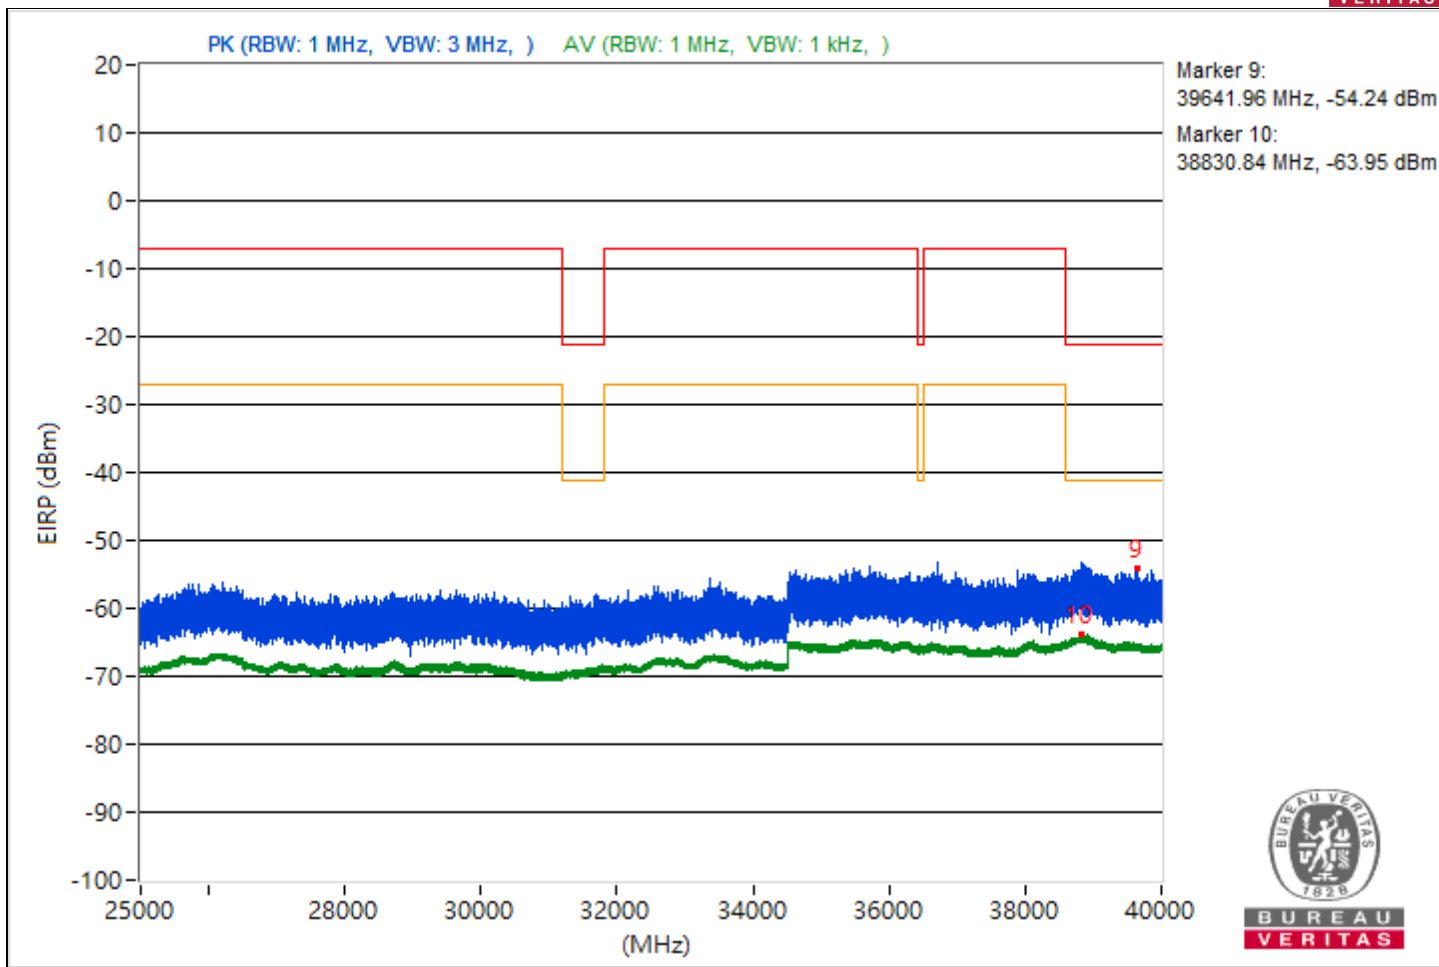





RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3757.53	47.08 PK	74	-26.92	-54.25	-59.43	4.92	-48.18
2	3819.37	35.61 AV	54	-18.39	-67.3	-67.89	4.92	-59.65
3	15354.76	45.16 PK	74	-28.84	-56.35	-60.83	4.92	-50.1
4	14485.42	34.56 AV	54	-19.44	-68.36	-68.92	4.92	-60.7
5	19737.6	47.44 PK	74	-26.56	-53.6	-60.17	4.92	-47.82
6	21139	36.63 AV	54	-17.37	-66.23	-66.93	4.92	-58.63
7	22378.3	48.78 PK	74	-25.22	-55.71	-53.41	4.92	-46.48
8	23769.2	37.63 AV	54	-16.37	-66.28	-64.94	4.92	-57.63
9	38775.02	41.01 PK	74	-32.99	-65.8	-60.23	4.92	-54.25
10	38865.96	31.4 AV	54	-22.6	-71.46	-72.15	4.92	-63.86

Note: Margin value = Emission Level - Limit value

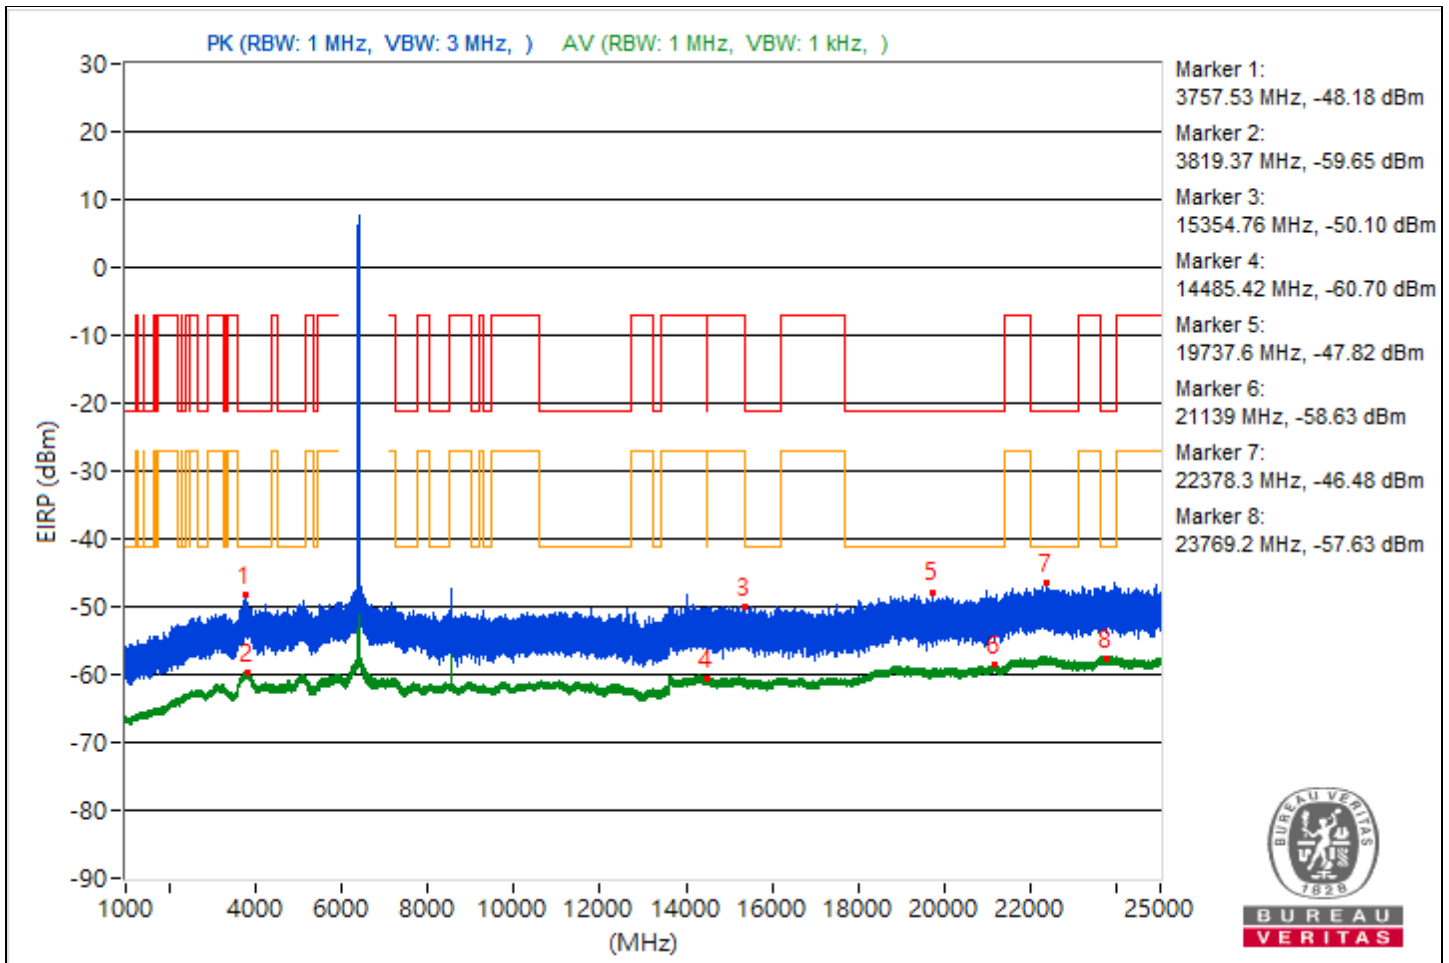

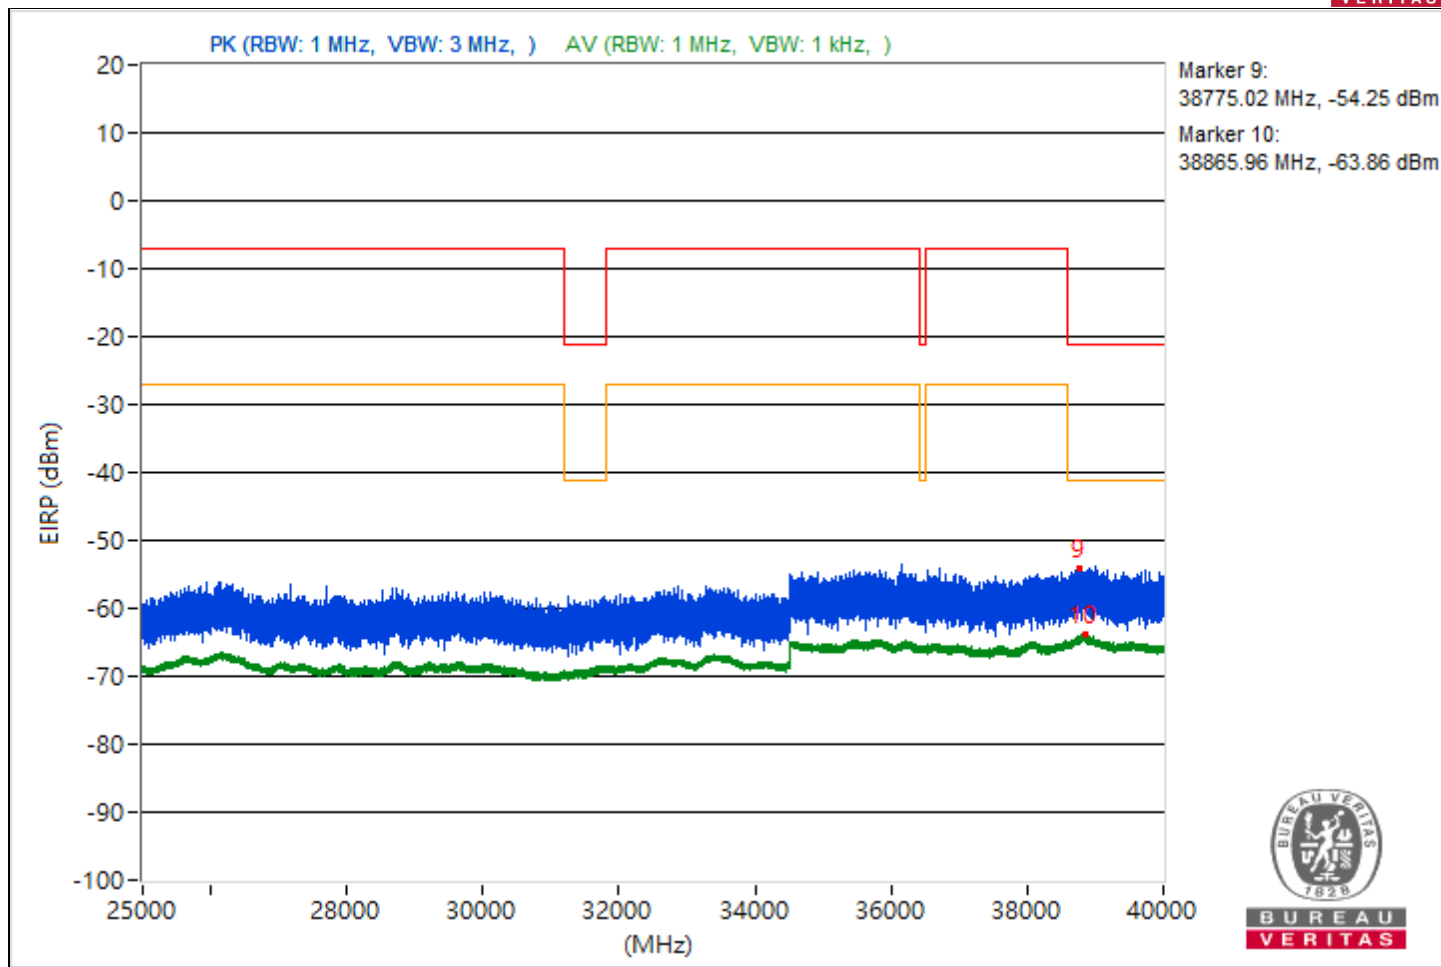





RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3869.61	46.39 PK	74	-27.61	-59.84	-55.03	4.92	-48.87
2	3809.02	35.73 AV	54	-18.27	-67.26	-67.68	4.92	-59.53
3	7278.84	45.19 PK	74	-28.81	-55.91	-62.16	4.92	-50.07
4	14473.07	34.56 AV	54	-19.44	-68.42	-68.87	4.92	-60.7
5	18944.9	47.6 PK	74	-26.4	-53.8	-58.7	4.92	-47.66
6	21395.5	36.55 AV	54	-17.45	-66.24	-67.07	4.92	-58.71
7	22133	48.59 PK	74	-25.41	-52.57	-58.53	4.92	-46.67
8	22303	37.8 AV	54	-16.2	-65.77	-65.04	4.92	-57.46
9	38944.09	41.83 PK	74	-32.17	-60.09	-63.14	4.92	-53.43
10	38880.98	31.2 AV	54	-22.8	-71.44	-72.61	4.92	-64.06

Note: Margin value = Emission Level - Limit value

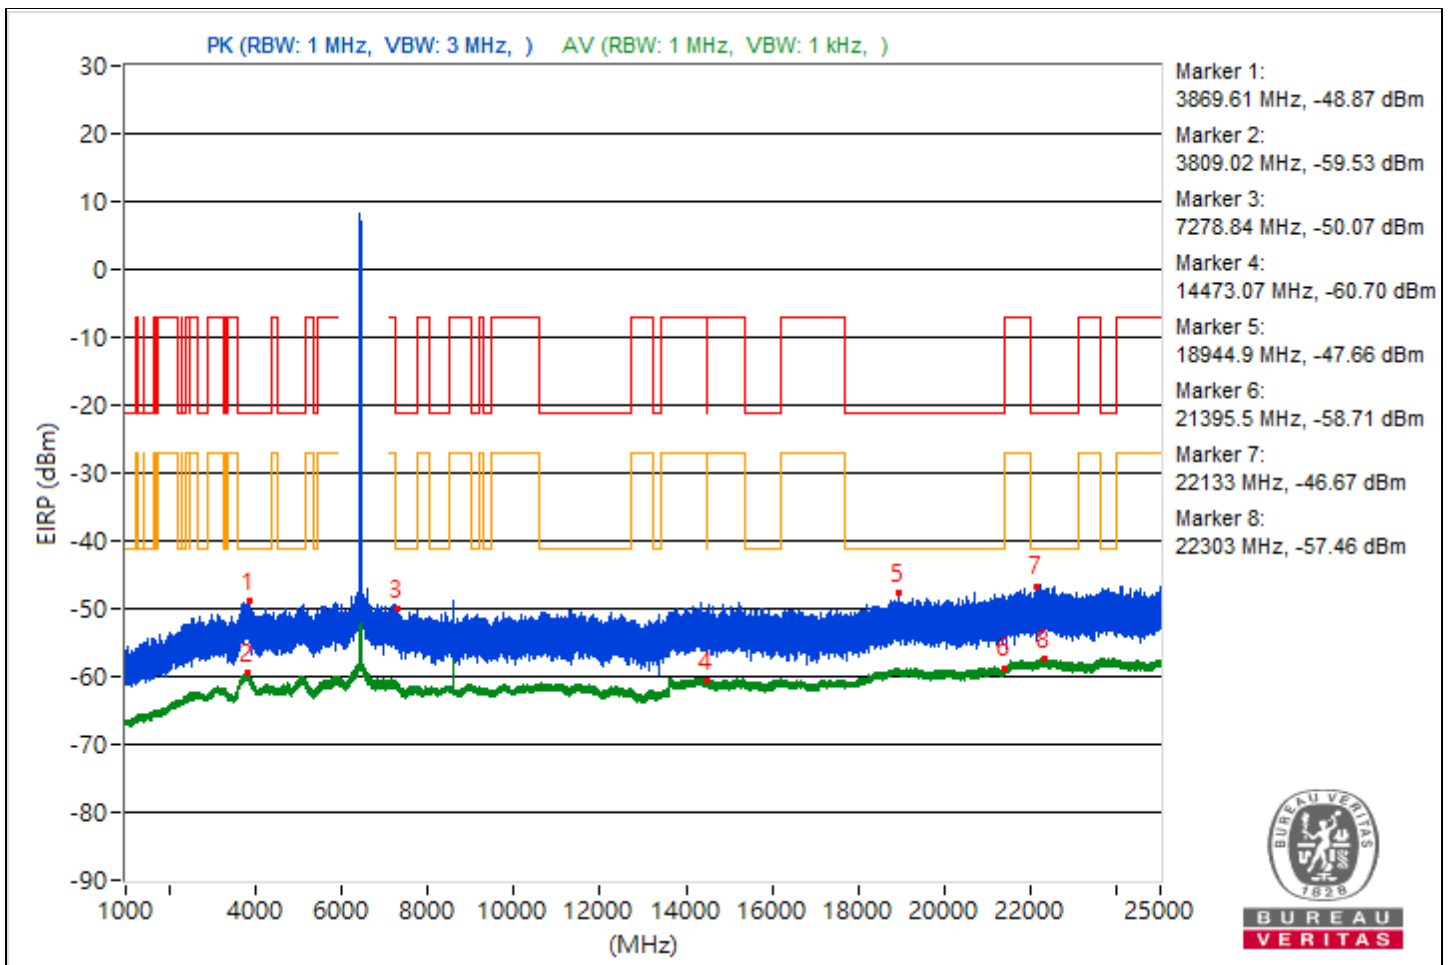

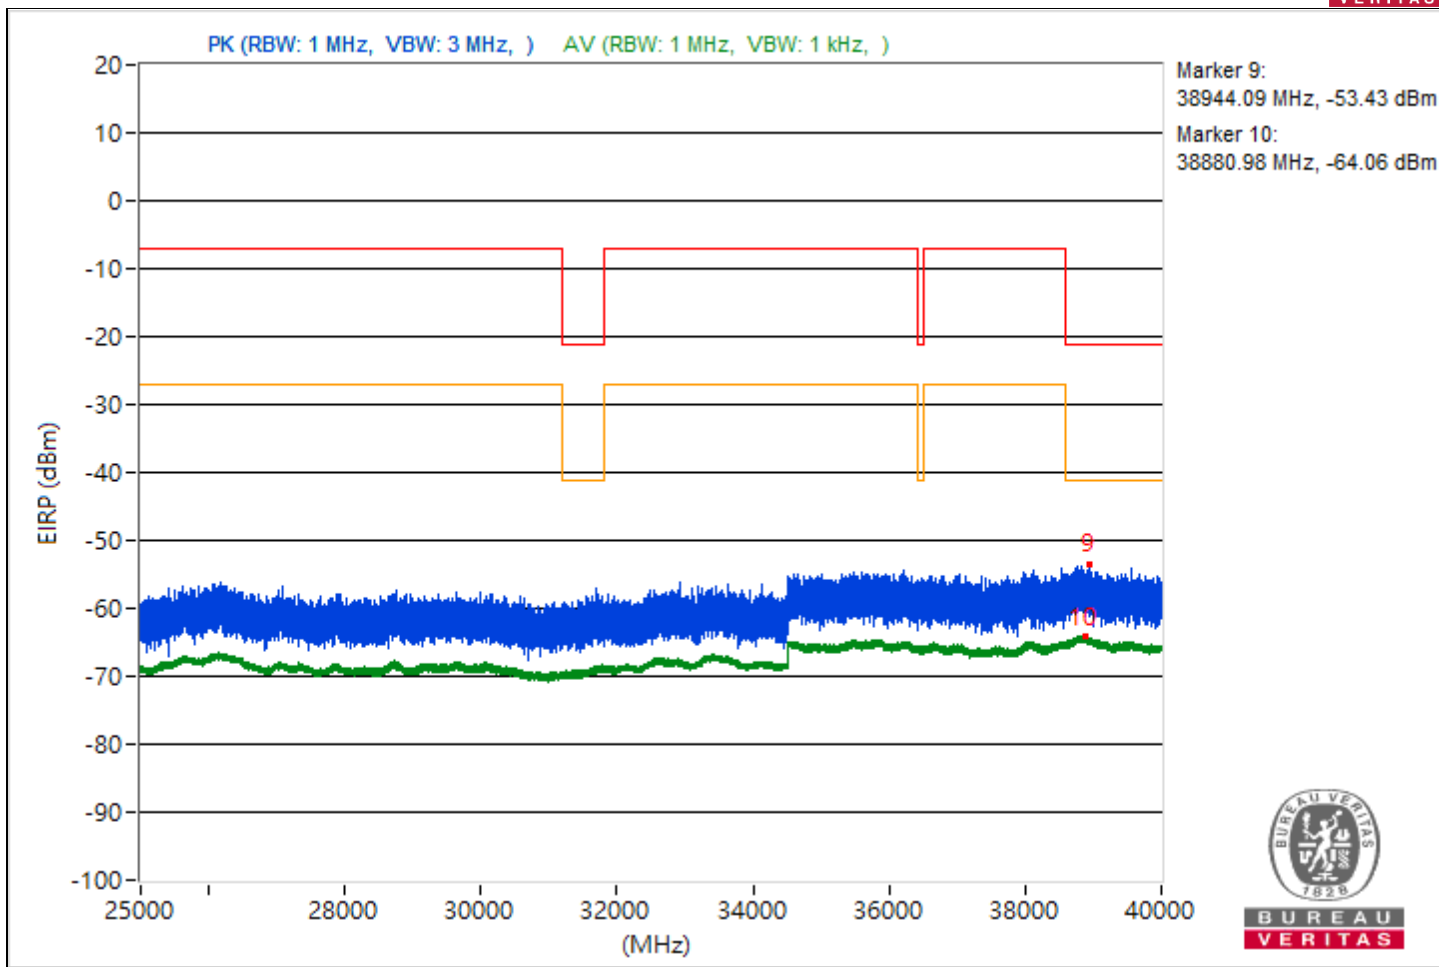





RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3778.3	47.86 PK	74	-26.14	-57.49	-53.89	4.92	-47.4
2	3813.92	35.71 AV	54	-18.29	-67.31	-67.66	4.92	-59.55
3	15496	44.81 PK	74	-29.19	-62.31	-56.36	4.92	-50.45
4	14473.42	34.62 AV	54	-19.38	-68.77	-68.37	4.92	-60.64
5	21273.1	47.44 PK	74	-26.56	-57.39	-54.57	4.92	-47.82
6	21159.6	36.55 AV	54	-17.45	-66.36	-66.93	4.92	-58.71
7	22536.8	48.9 PK	74	-25.1	-59.67	-51.96	4.92	-46.36
8	23811	37.9 AV	54	-16.1	-64.82	-65.83	4.92	-57.36
9	38841.33	41.4 PK	74	-32.6	-59.75	-65.73	4.92	-53.86
10	38841.51	31.35 AV	54	-22.65	-72.06	-71.64	4.92	-63.91

Note: Margin value = Emission Level - Limit value

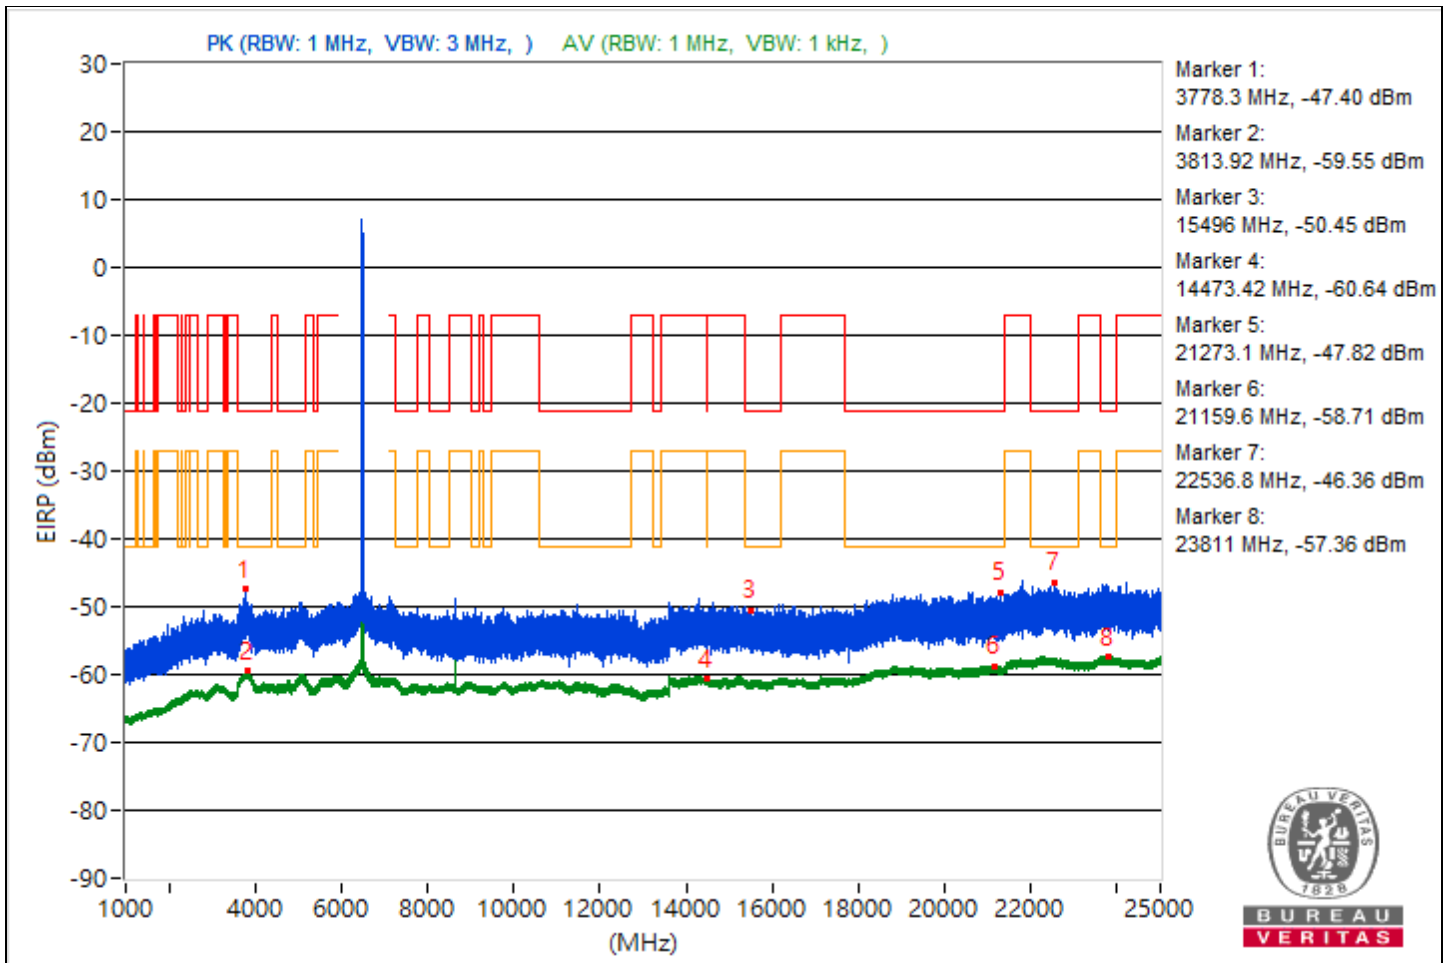

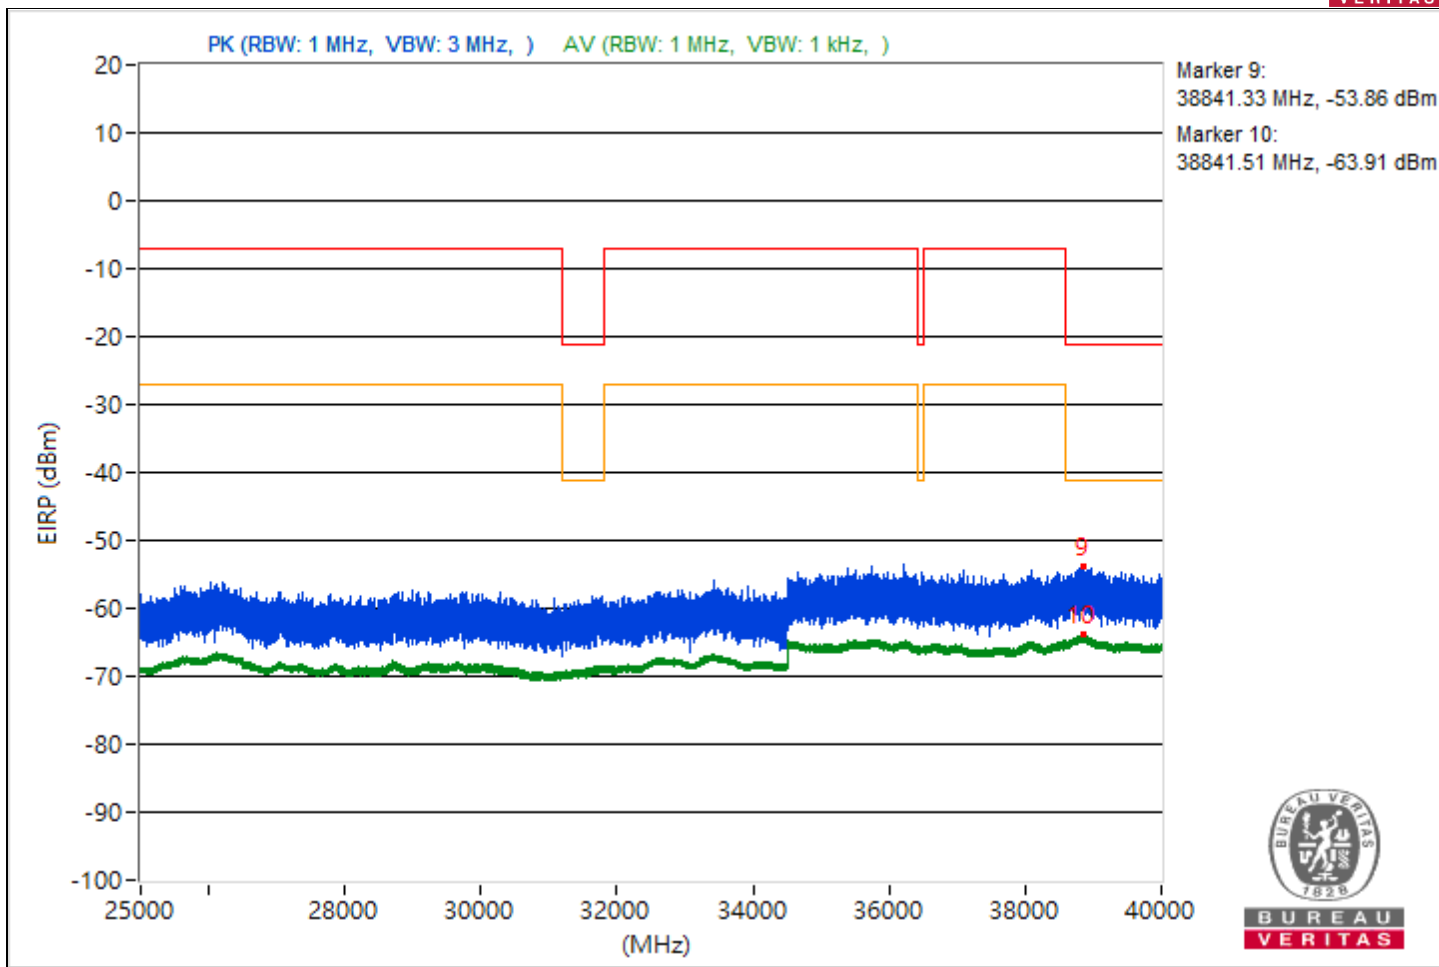





RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5111.33	46.02 PK	74	-27.98	-55.2	-60.88	4.92	-49.24
2	3831.42	35.61 AV	54	-18.39	-67.22	-67.98	4.92	-59.65
3	7744.42	45.35 PK	74	-28.65	-55.97	-61.18	4.92	-49.91
4	14476.36	34.87 AV	54	-19.13	-68.51	-68.13	4.92	-60.39
5	19561.4	47.53 PK	74	-26.47	-59.64	-53.62	4.92	-47.73
6	21394.6	36.41 AV	54	-17.59	-66.23	-67.41	4.92	-58.85
7	23716.6	48.09 PK	74	-25.91	-52.93	-59.64	4.92	-47.17
8	23799.3	37.93 AV	54	-16.07	-64.96	-65.57	4.92	-57.33
9	38806.4	41.29 PK	74	-32.71	-64.45	-60.31	4.92	-53.97
10	38788	31.25 AV	54	-22.75	-71.62	-72.29	4.92	-64.01

Note: Margin value = Emission Level - Limit value

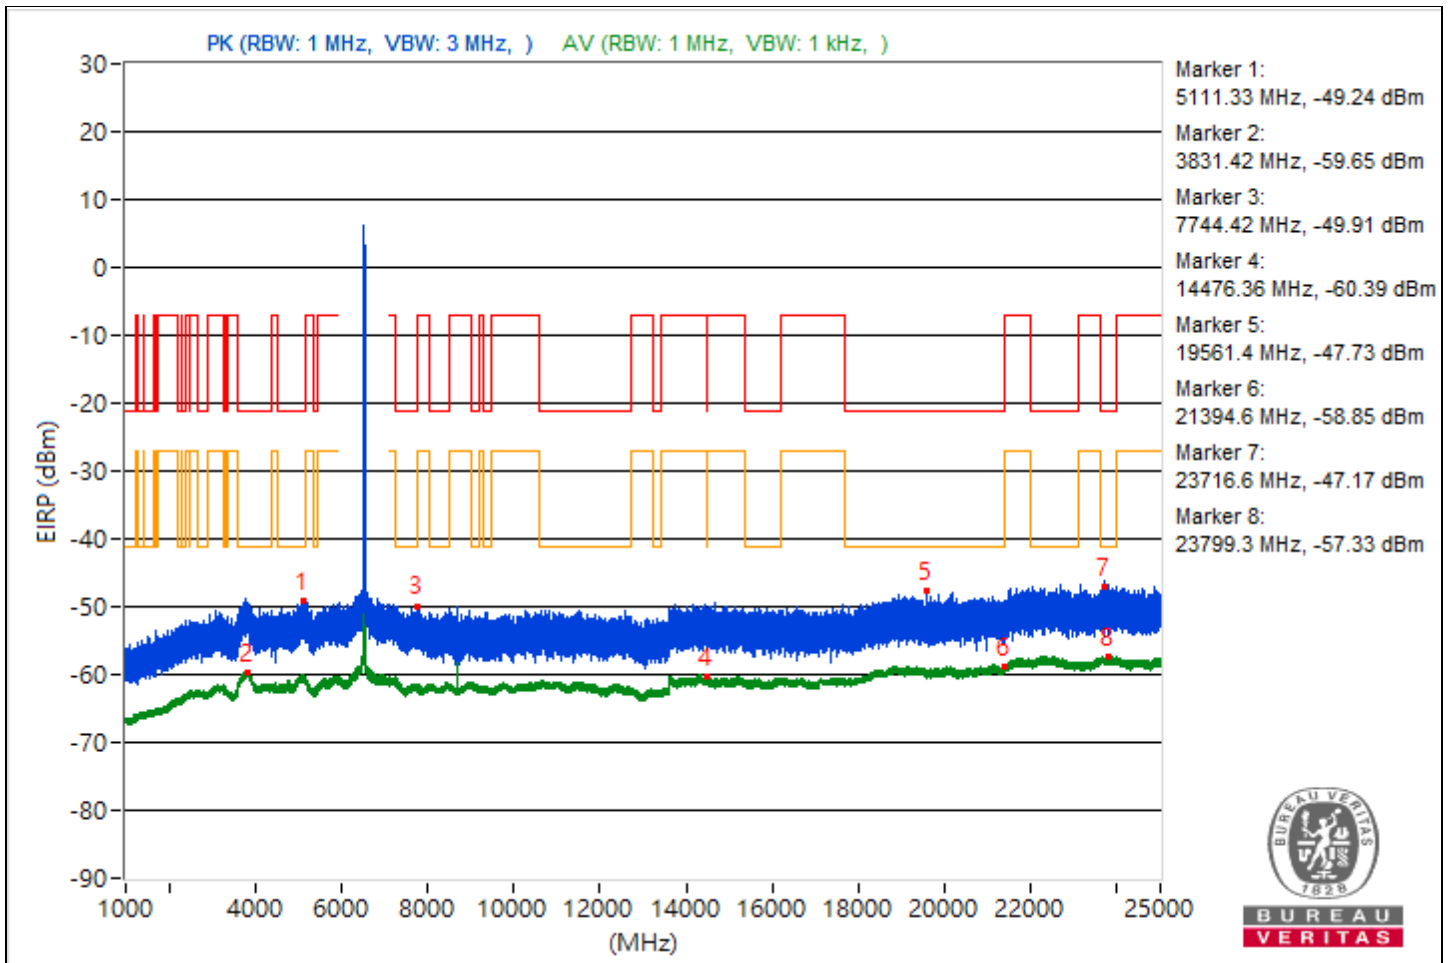

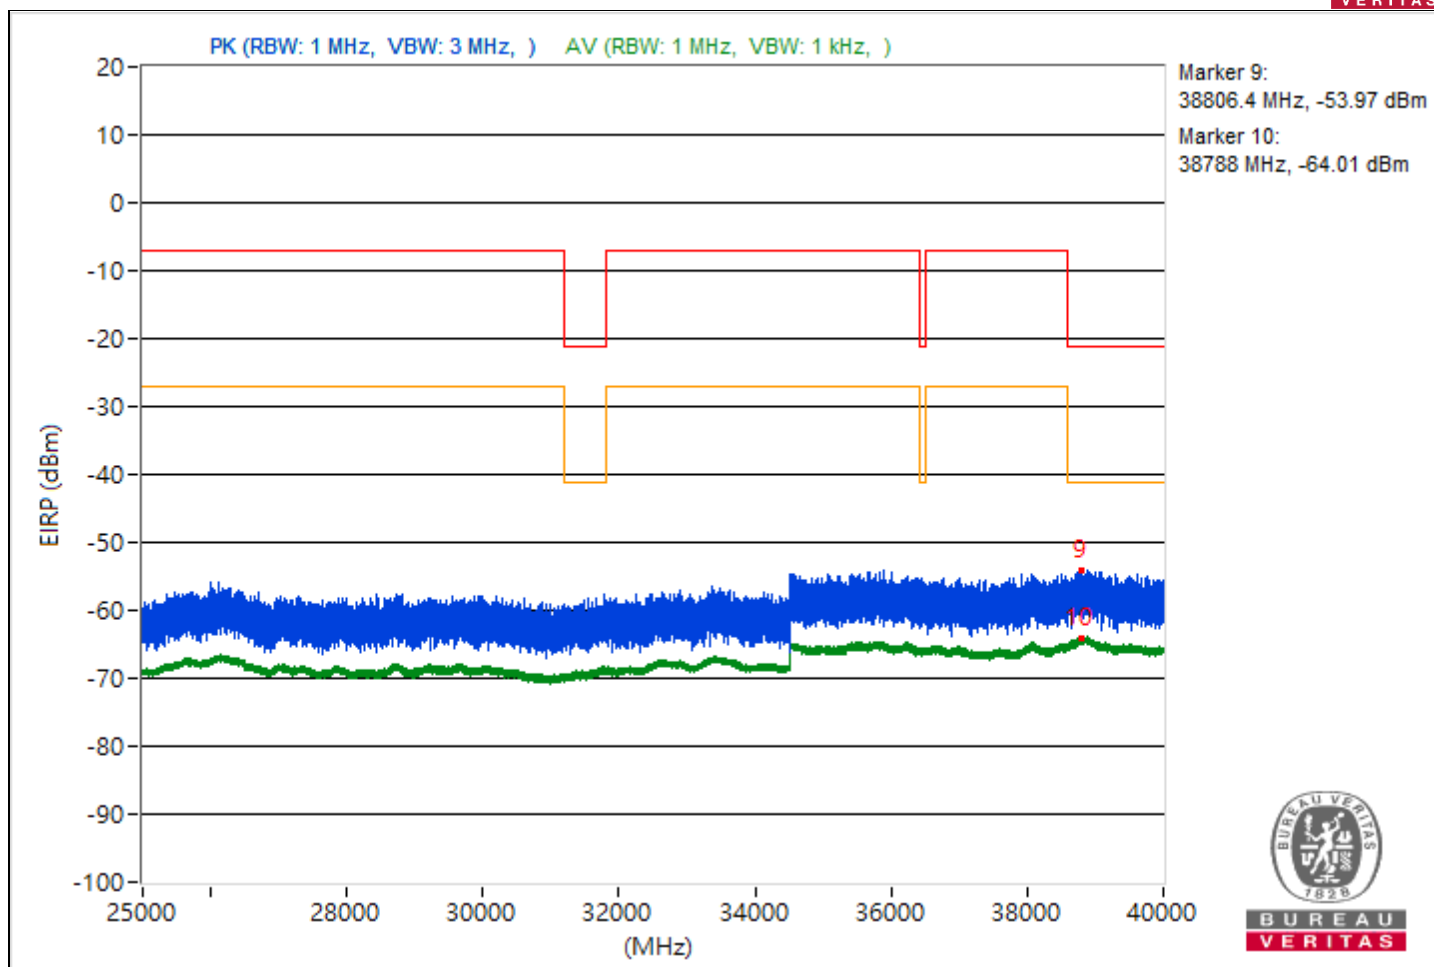





RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4781.56	46.4 PK	74	-27.6	-55.99	-57.77	4.92	-48.86
2	3822.56	35.57 AV	54	-18.43	-68.02	-67.27	4.92	-59.69
3	7262.9	45.66 PK	74	-28.34	-59.98	-55.97	4.92	-49.6
4	7250.38	34.78 AV	54	-19.22	-68.71	-68.13	4.92	-60.48
5	19708	46.96 PK	74	-27.04	-54.4	-59.44	4.92	-48.3
6	21388.3	36.56 AV	54	-17.44	-66.38	-66.89	4.92	-58.7
7	22231.5	48.31 PK	74	-25.69	-52.6	-59.94	4.92	-46.95
8	23812.5	38 AV	54	-16	-65.53	-64.87	4.92	-57.26
9	38818.31	41.38 PK	74	-32.62	-66.67	-59.57	4.92	-53.88
10	38878.67	31.16 AV	54	-22.84	-72.37	-71.72	4.92	-64.1

Note: Margin value = Emission Level - Limit value

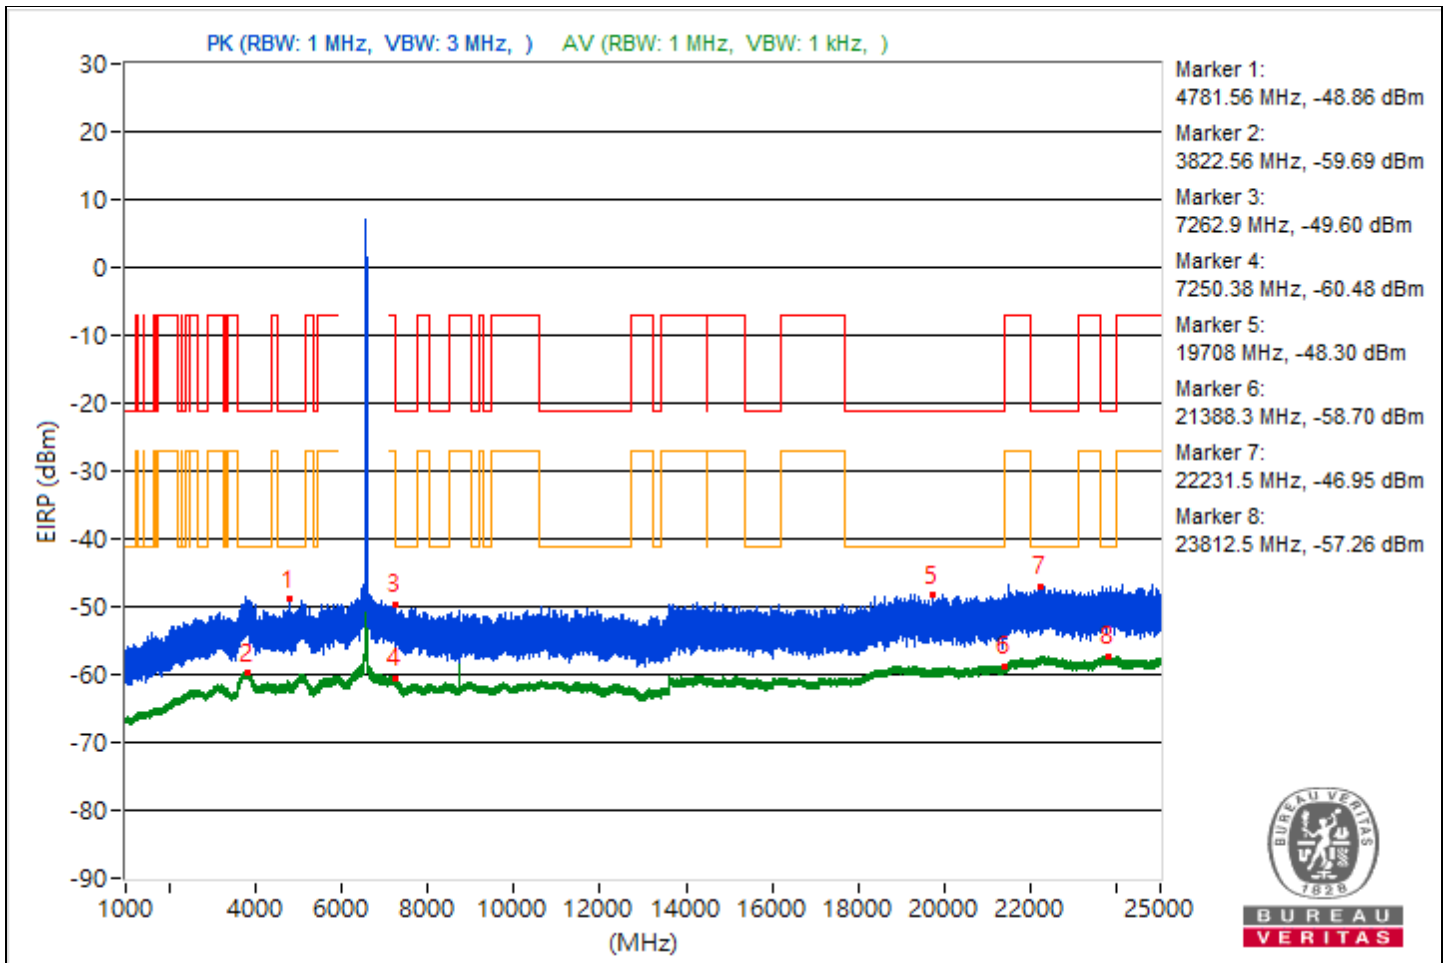

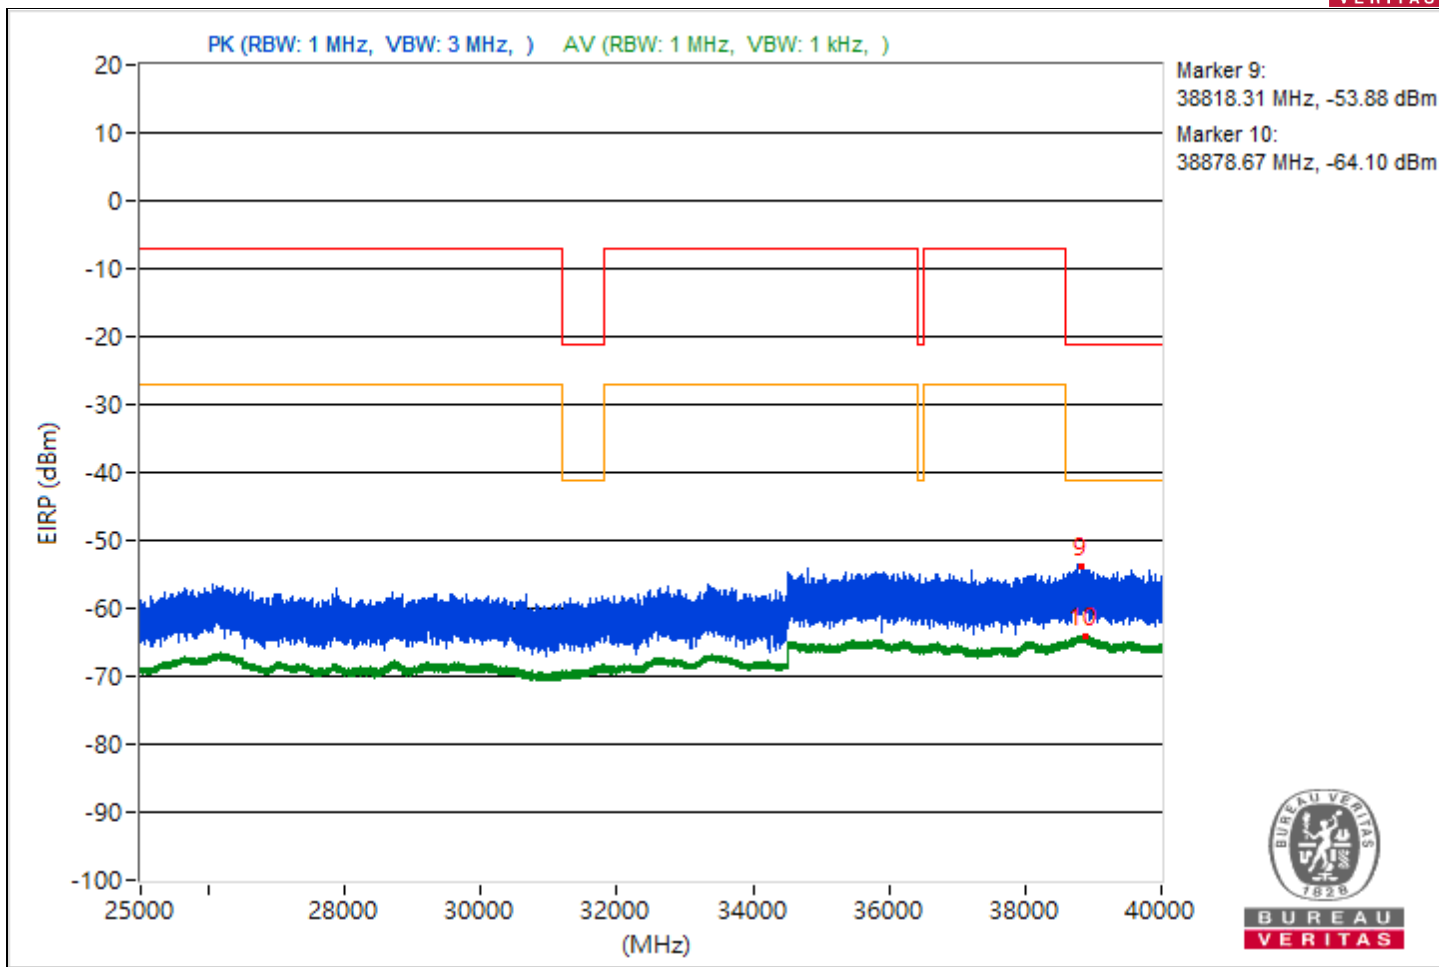





RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3871.32	45.86 PK	74	-28.14	-60.39	-55.55	4.92	-49.4
2	3829.09	35.73 AV	54	-18.27	-67.26	-67.68	4.92	-59.53
3	15583.91	45.2 PK	74	-28.8	-55.96	-61.92	4.92	-50.06
4	7255.59	35.19 AV	54	-18.81	-68.38	-67.64	4.92	-60.07
5	20655.3	47.61 PK	74	-26.39	-57.49	-54.26	4.92	-47.65
6	21385.7	36.44 AV	54	-17.56	-67.33	-66.24	4.92	-58.82
7	22338.5	49.09 PK	74	-24.91	-55.65	-52.96	4.92	-46.17
8	23729.2	37.83 AV	54	-16.17	-65.79	-64.96	4.92	-57.43
9	39027.64	41.34 PK	74	-32.66	-60.3	-64.27	4.92	-53.92
10	38839.91	31.18 AV	54	-22.82	-71.51	-72.59	4.92	-64.08

Note: Margin value = Emission Level - Limit value

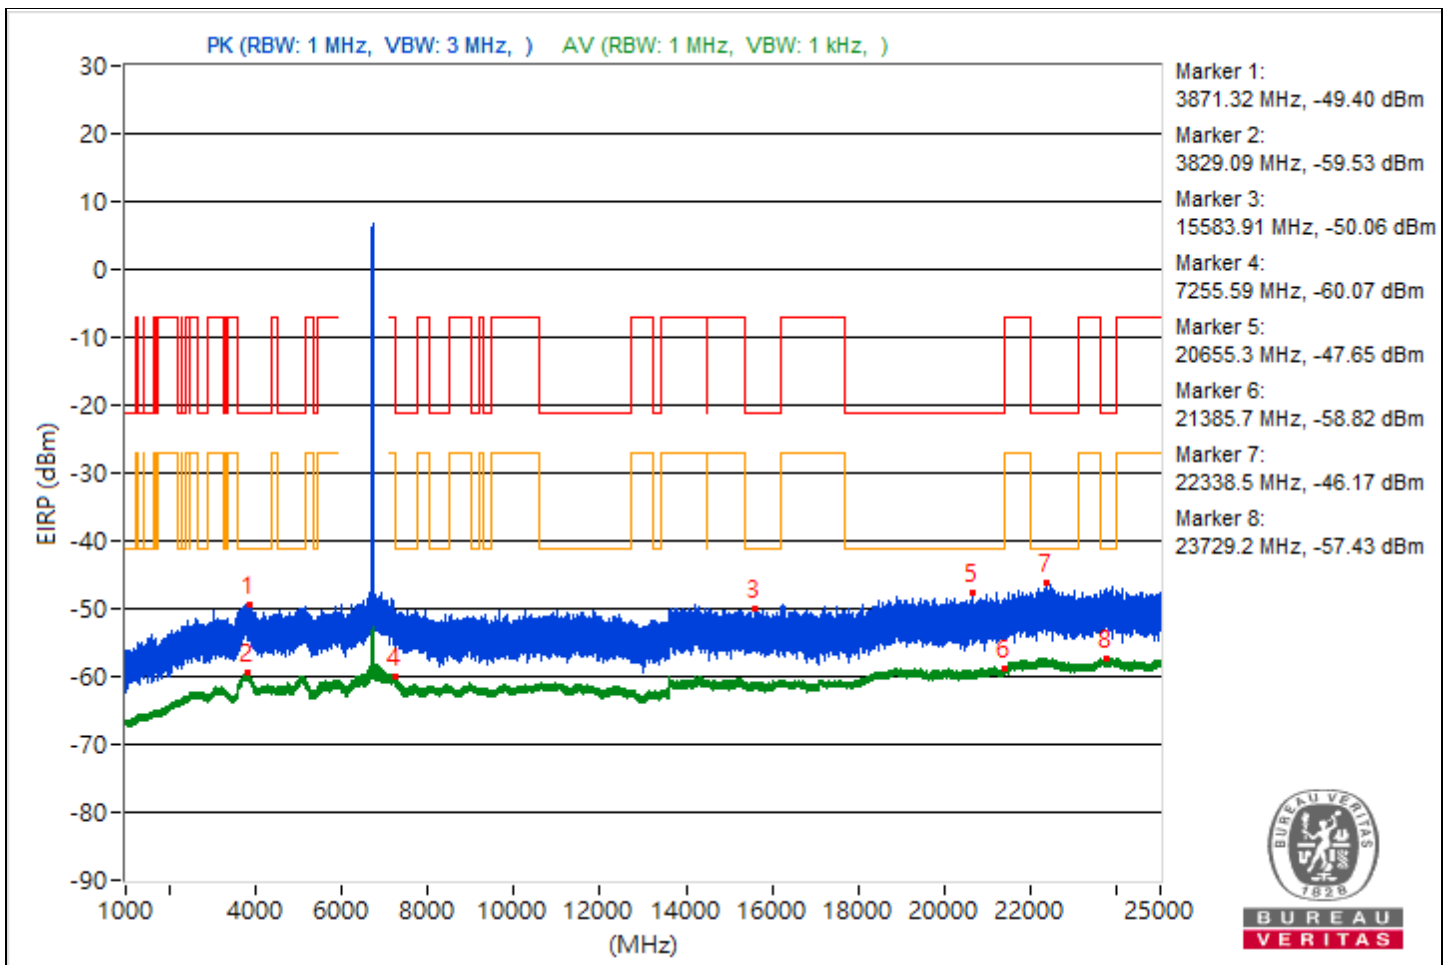

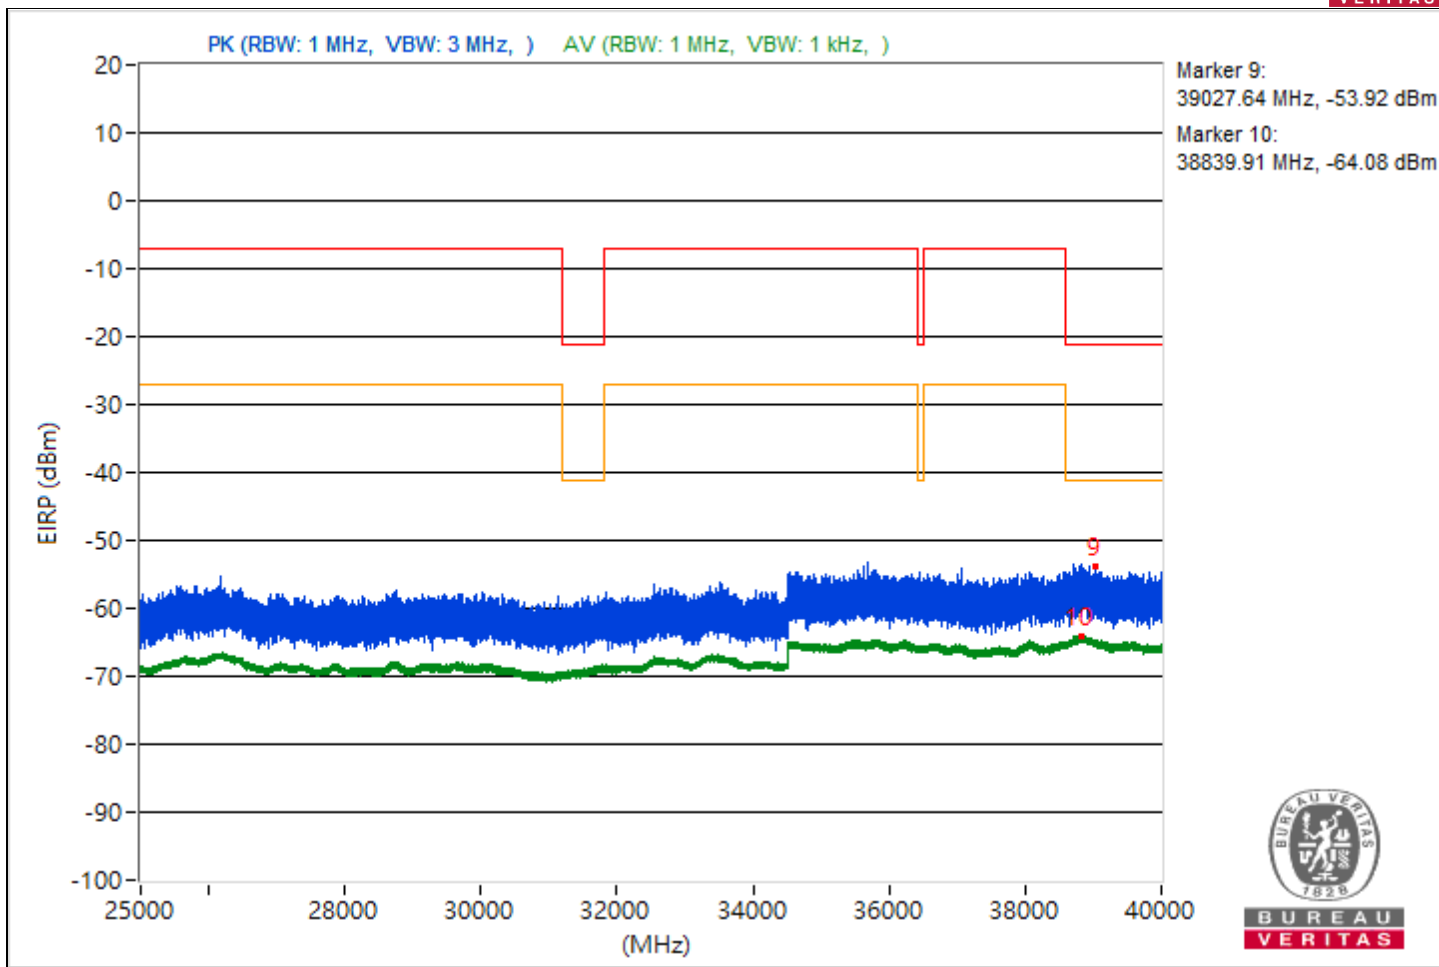





RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.94	46.68 PK	74	-27.32	-54.77	-59.45	4.92	-48.58
2	3800.47	35.66 AV	54	-18.34	-67.24	-67.83	4.92	-59.6
3	7335.54	45.77 PK	74	-28.23	-55.55	-60.77	4.92	-49.49
4	7251.08	35.28 AV	54	-18.72	-68.21	-67.63	4.92	-59.98
5	21135.4	47.34 PK	74	-26.66	-53.77	-60.02	4.92	-47.92
6	21139.6	36.45 AV	54	-17.55	-66.27	-67.26	4.92	-58.81
7	22784.5	48.4 PK	74	-25.6	-52.46	-60.19	4.92	-46.86
8	23943.4	37.92 AV	54	-16.08	-64.96	-65.6	4.92	-57.34
9	38835.38	41.39 PK	74	-32.61	-59.53	-66.86	4.92	-53.87
10	38862.22	31.22 AV	54	-22.78	-72.25	-71.71	4.92	-64.04

Note: Margin value = Emission Level - Limit value

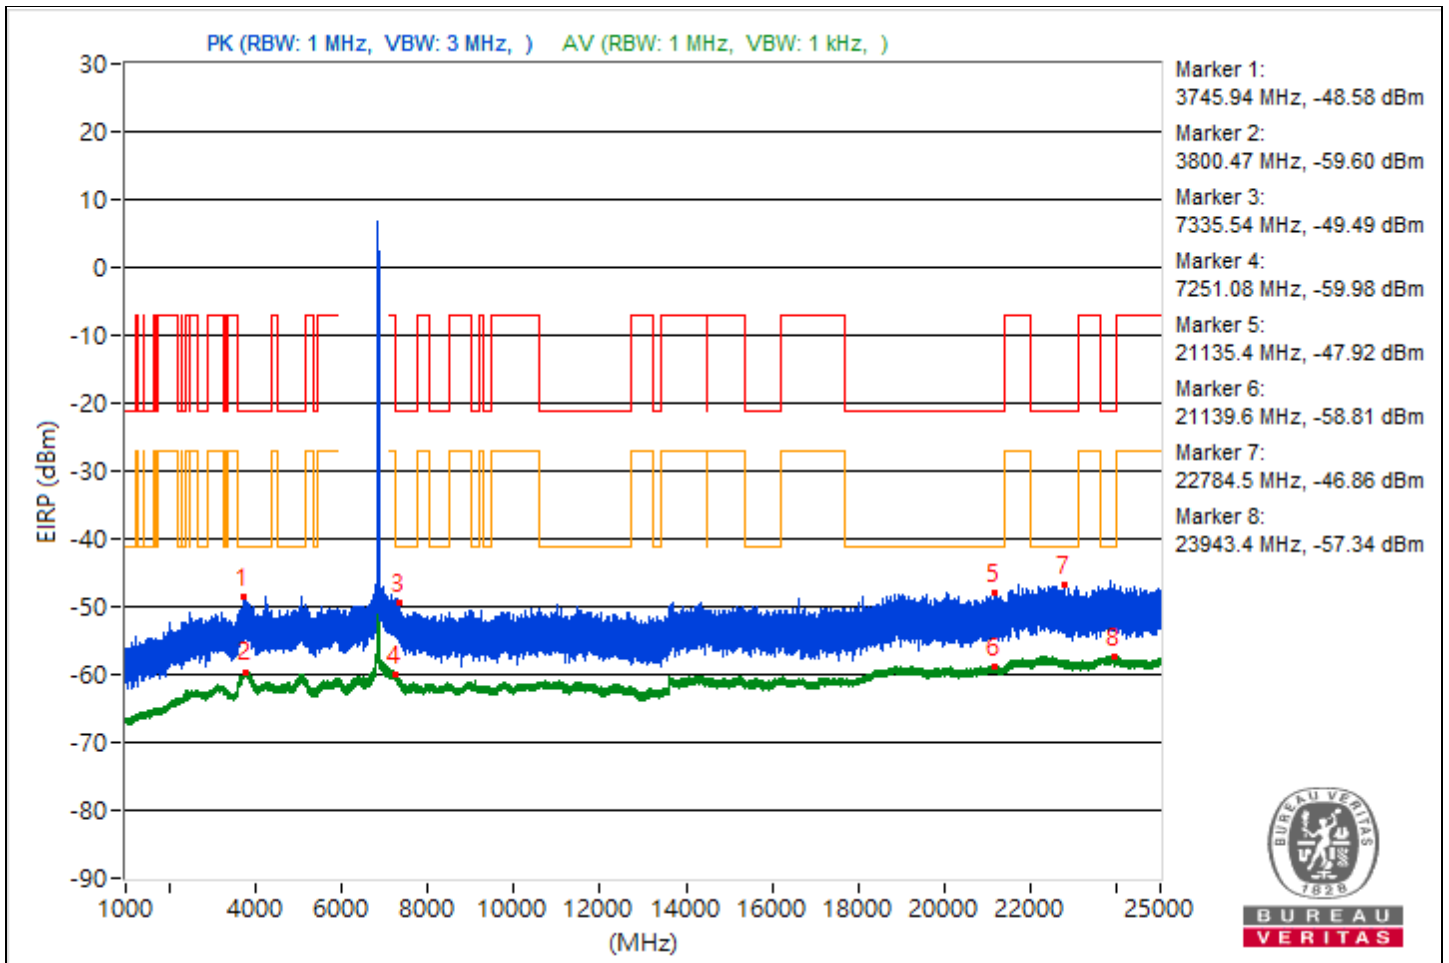

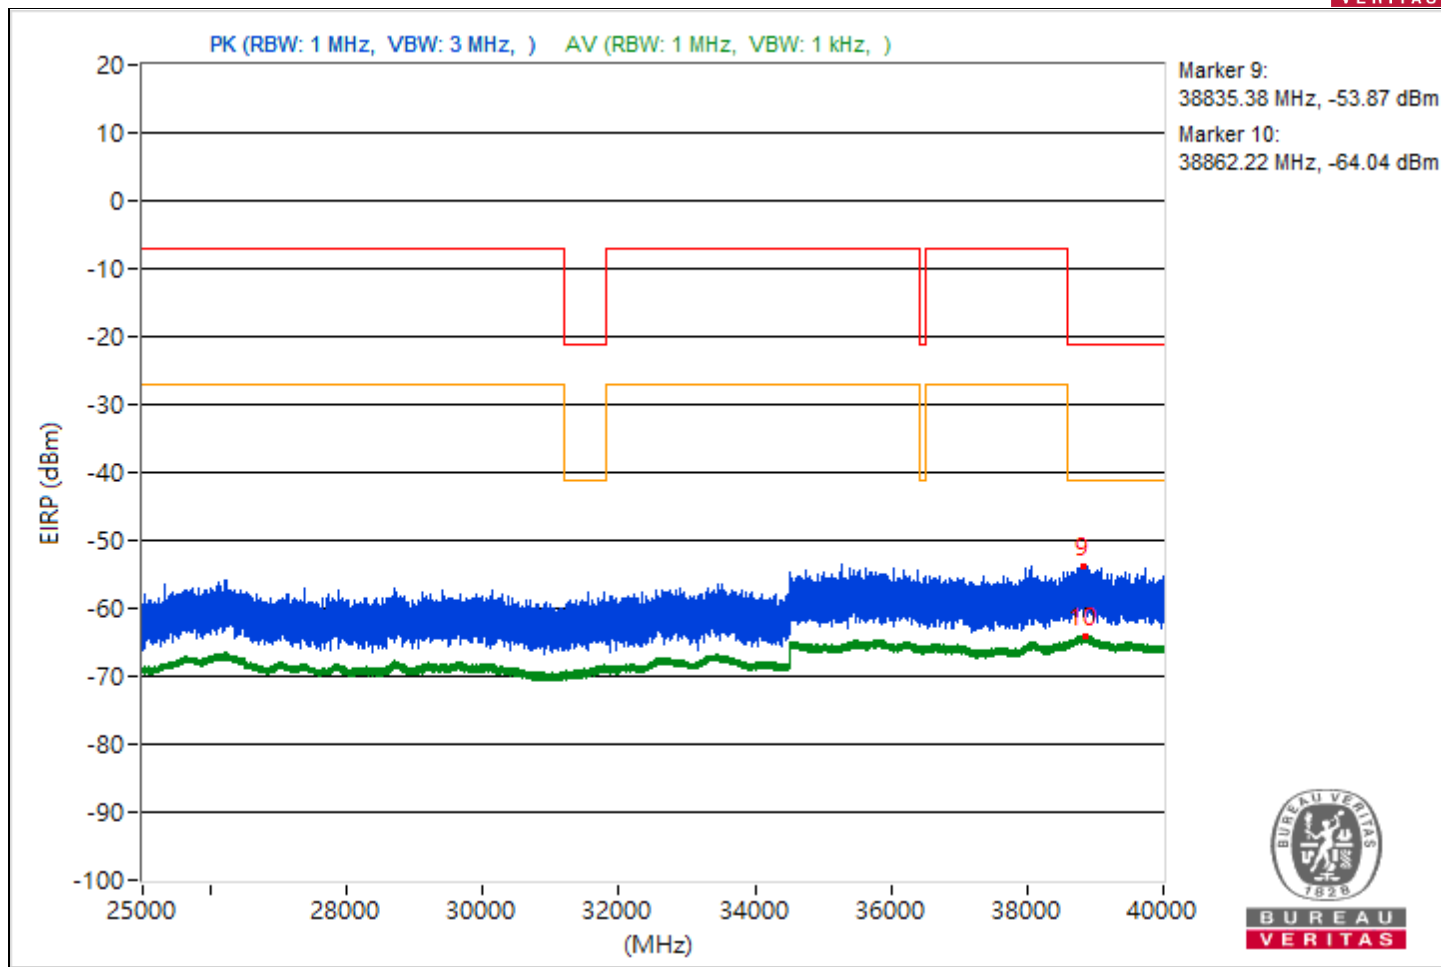





RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3825.2	46.58 PK	74	-27.42	-58.81	-55.16	4.92	-48.68
2	3815.56	35.76 AV	54	-18.24	-67.1	-67.79	4.92	-59.5
3	7291.68	47.52 PK	74	-26.48	-55.21	-56.19	4.92	-47.74
4	7255.12	35.14 AV	54	-18.86	-67.49	-68.71	4.92	-60.12
5	20901.6	46.9 PK	74	-27.1	-54.65	-58.98	4.92	-48.36
6	21393.6	36.57 AV	54	-17.43	-66.33	-66.93	4.92	-58.69
7	22220.9	48.25 PK	74	-25.75	-52.7	-59.84	4.92	-47.01
8	22258	37.97 AV	54	-16.03	-64.93	-65.53	4.92	-57.29
9	38760.53	41.41 PK	74	-32.59	-65.16	-59.9	4.92	-53.85
10	38790.93	31.17 AV	54	-22.83	-72.55	-71.55	4.92	-64.09

Note: Margin value = Emission Level - Limit value

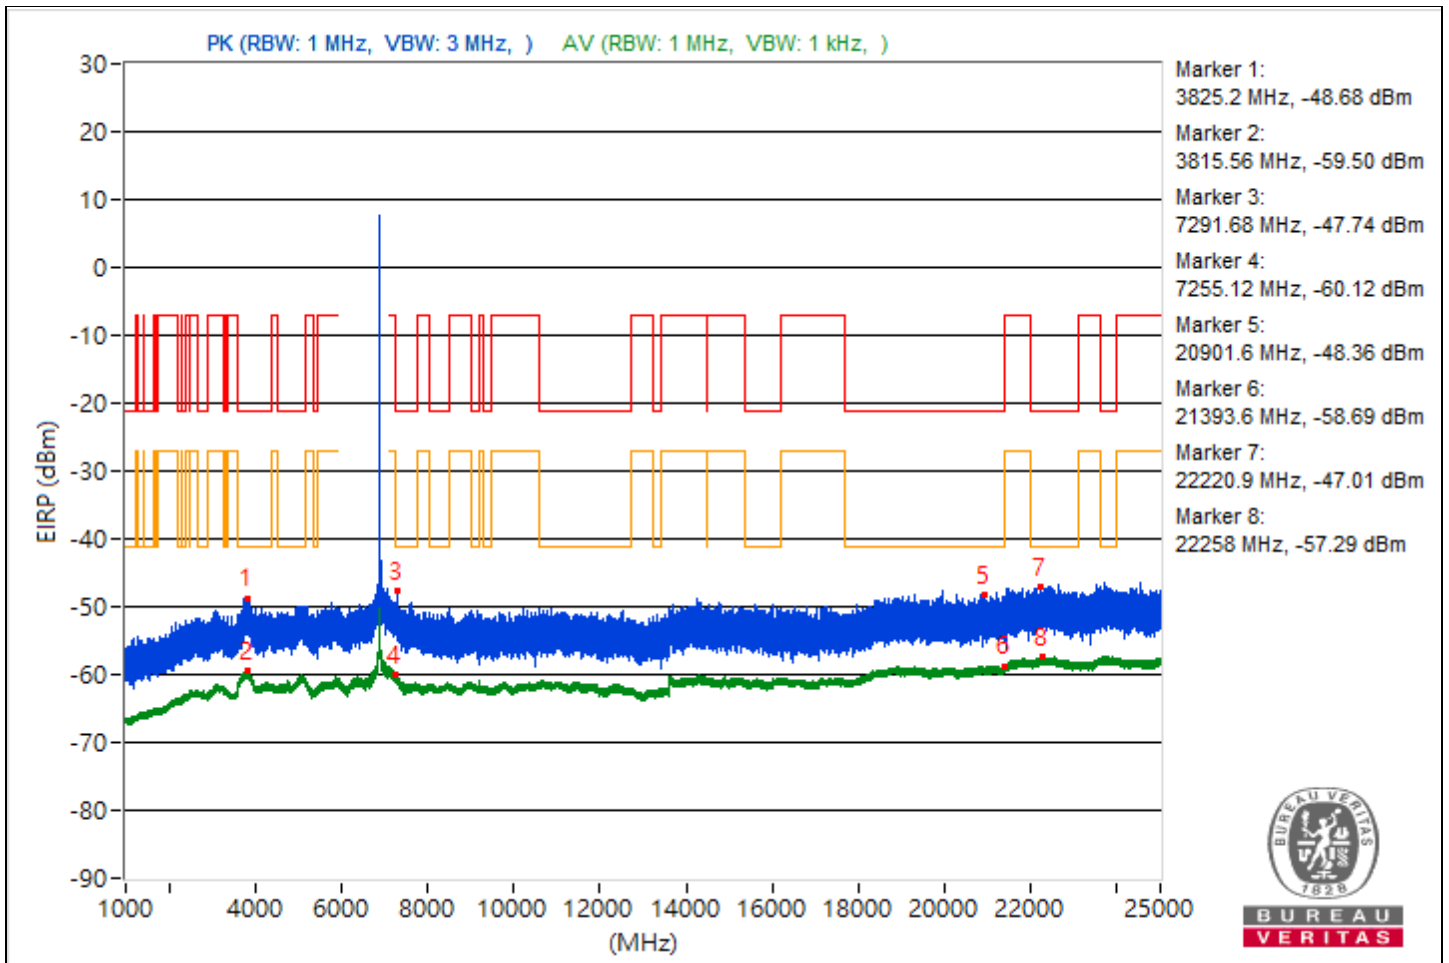

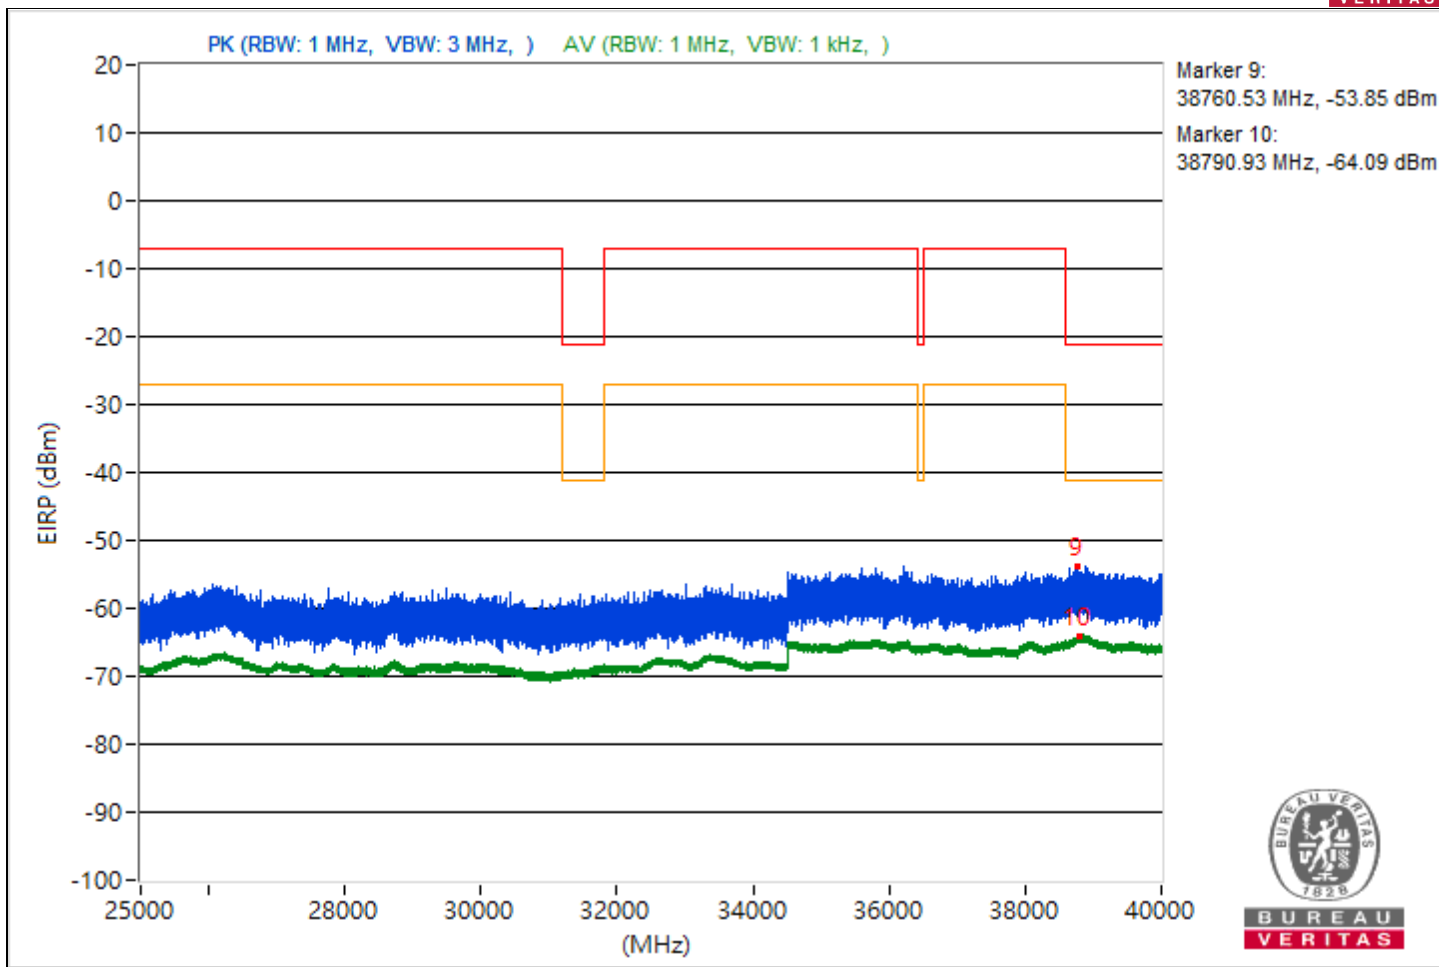





RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3750.22	45.93 PK	74	-28.07	-56.02	-59.02	4.92	-49.33
2	3811.51	35.73 AV	54	-18.27	-67.73	-67.21	4.92	-59.53
3	7311.28	46.64 PK	74	-27.36	-59.45	-54.83	4.92	-48.62
4	7252.71	36.53 AV	54	-17.47	-66.4	-66.94	4.92	-58.73
5	20800.7	46.82 PK	74	-27.18	-60.07	-54.4	4.92	-48.44
6	21151	36.81 AV	54	-17.19	-65.9	-66.92	4.92	-58.45
7	22266	48.33 PK	74	-25.67	-53.29	-57.33	4.92	-46.93
8	22222.3	37.77 AV	54	-16.23	-64.96	-65.94	4.92	-57.49
9	38764.36	41.13 PK	74	-32.87	-65.92	-60.05	4.92	-54.13
10	38802.22	31.36 AV	54	-22.64	-71.59	-72.08	4.92	-63.9

Note: Margin value = Emission Level - Limit value

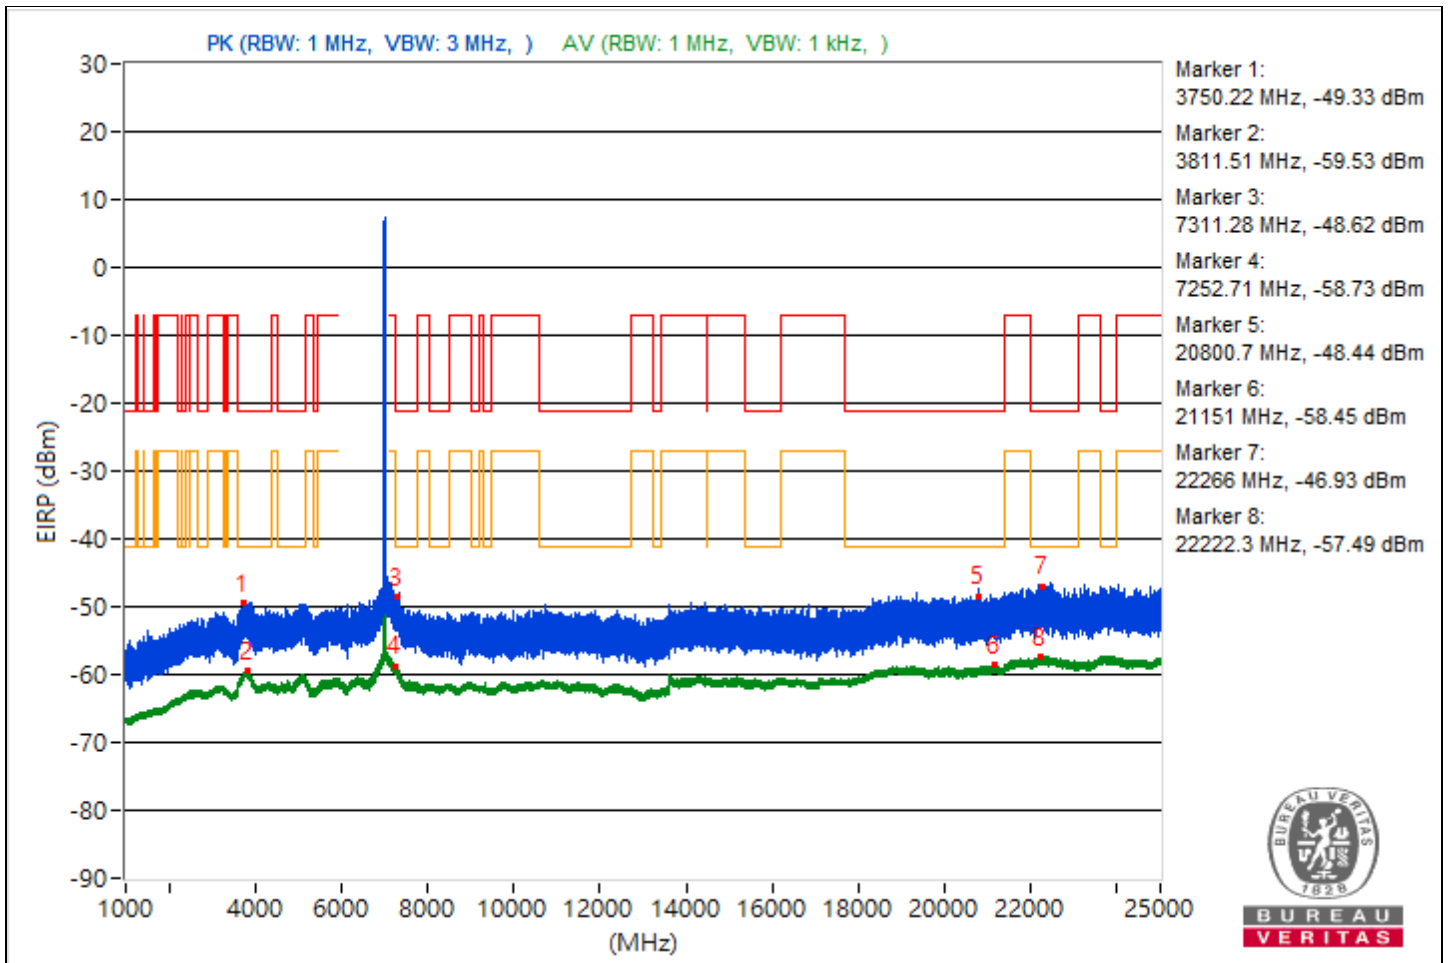

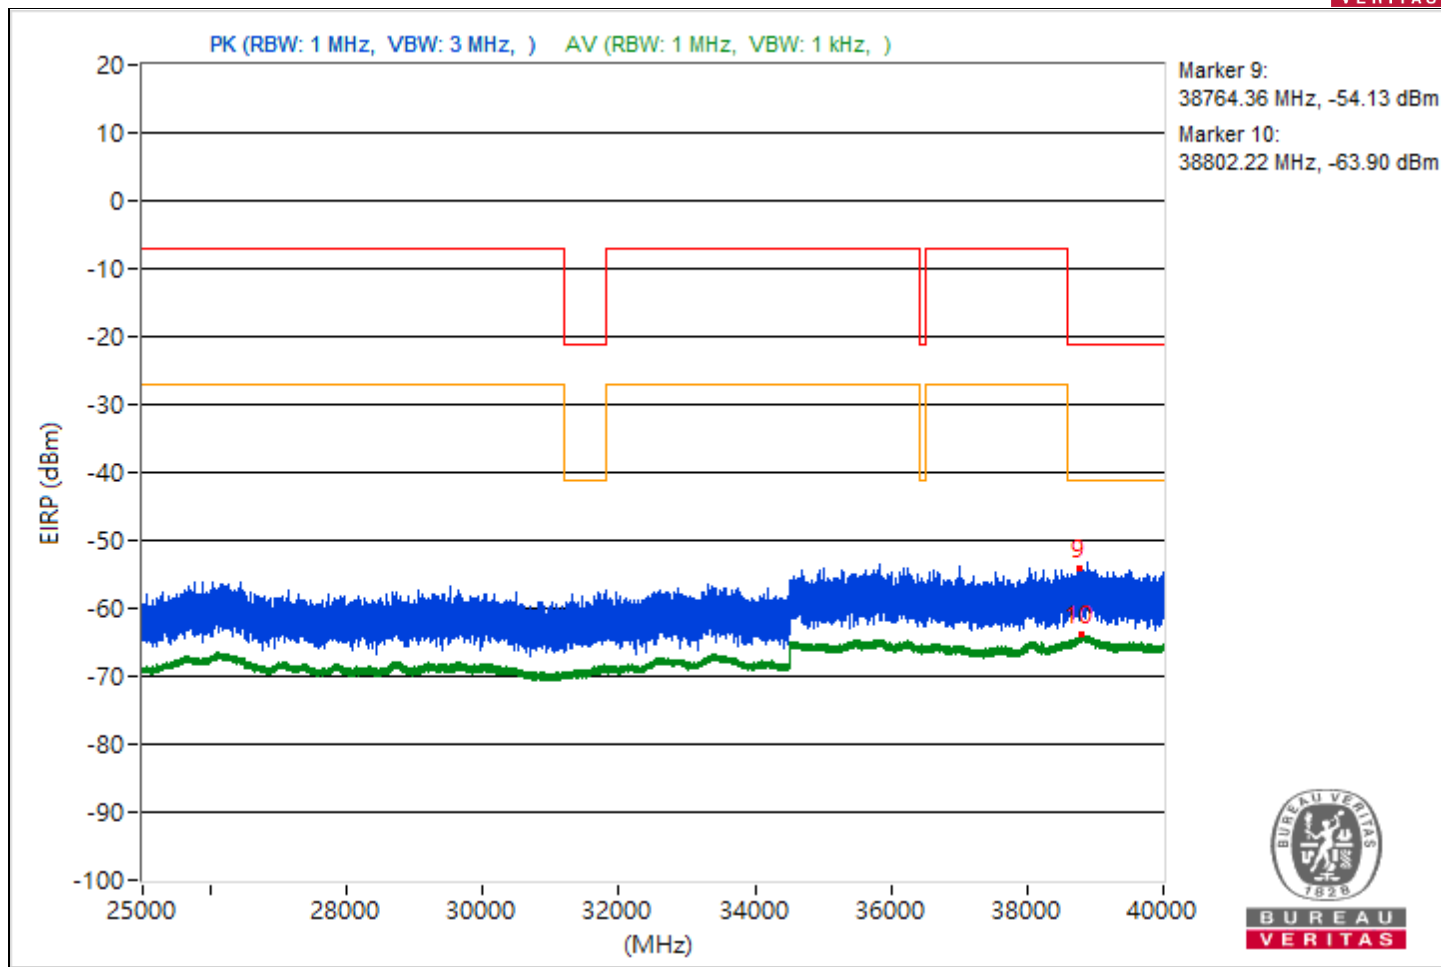





RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.04	46.1 PK	74	-27.9	-54.94	-61.53	4.92	-49.16
2	3798.91	35.63 AV	54	-18.37	-67.78	-67.36	4.92	-59.63
3	7257.92	48 PK	74	-26	-54.47	-56.05	4.92	-47.26
4	7263.29	36.78 AV	54	-17.22	-66.69	-66.14	4.92	-58.48
5	20484.2	47.07 PK	74	-26.93	-54.68	-58.3	4.92	-48.19
6	21160.6	36.54 AV	54	-17.46	-66.31	-67.01	4.92	-58.72
7	22455.3	48.04 PK	74	-25.96	-58.06	-53.43	4.92	-47.22
8	23724.4	37.93 AV	54	-16.07	-65.54	-65	4.92	-57.33
9	38797.6	41.84 PK	74	-32.16	-59.98	-63.35	4.92	-53.42
10	38839.91	31.12 AV	54	-22.88	-71.6	-72.61	4.92	-64.14

Note: Margin value = Emission Level - Limit value

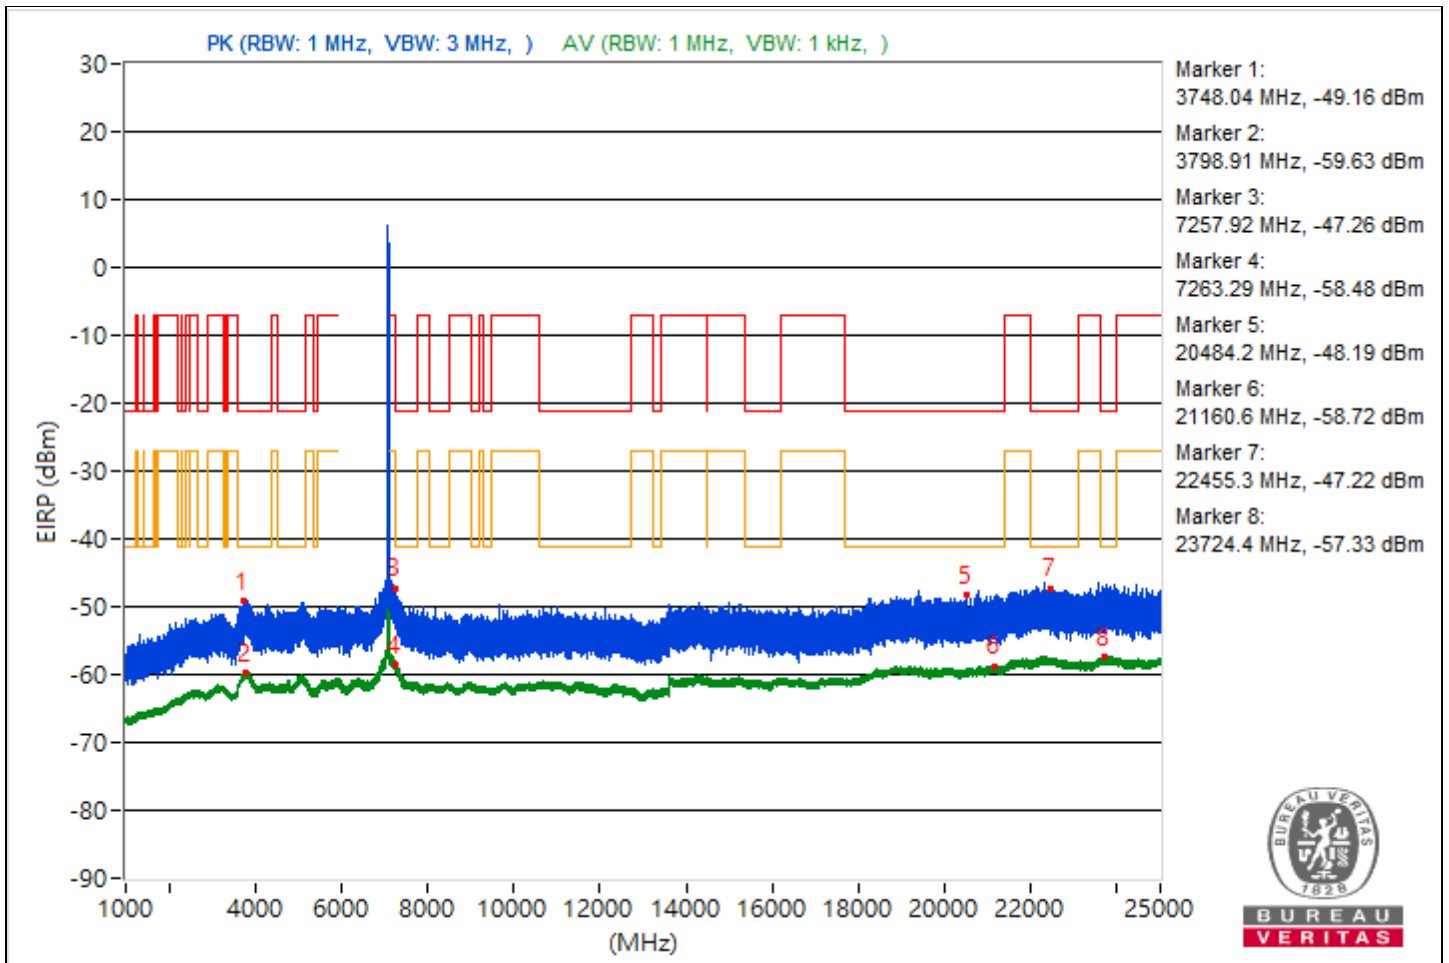

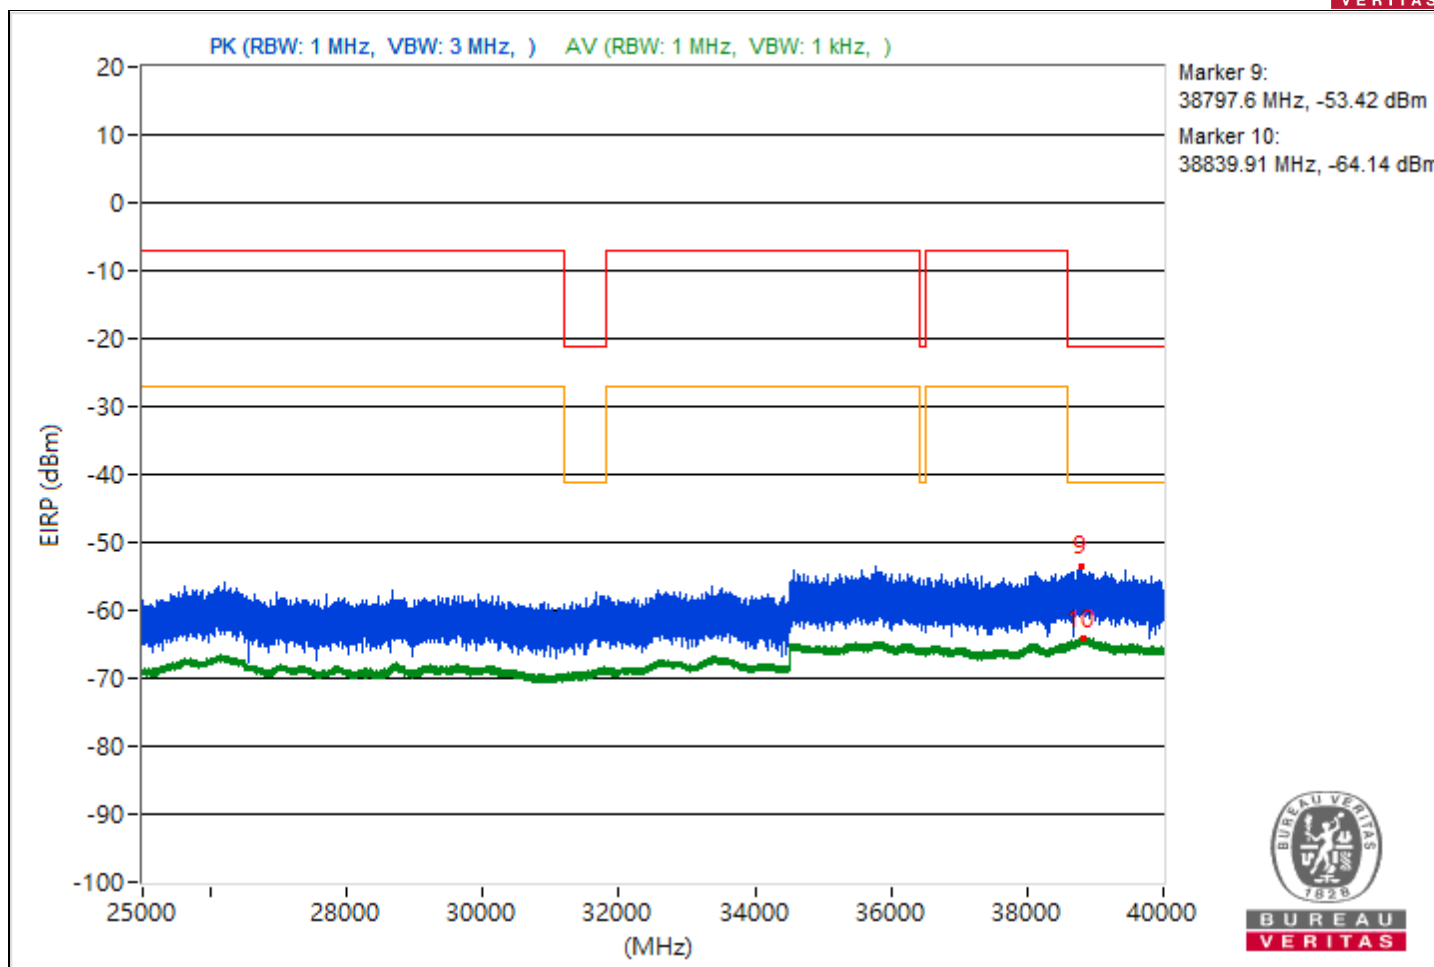





RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5443.99	48.49 PK	74	-25.51	-53.85	-55.75	4.92	-46.77
2	5455.97	37.92 AV	54	-16.08	-64.96	-65.59	4.92	-57.34
3	7274.72	44.84 PK	74	-29.16	-56.57	-61.41	4.92	-50.42
4	#7980.01	50.85 AV	68.26	-17.41	-52.24	-52.44	4.92	-44.41
5	20106.2	46.78 PK	74	-27.22	-60.13	-54.43	4.92	-48.48
6	21152.4	36.45 AV	54	-17.55	-67.23	-66.3	4.92	-58.81
7	23730.9	49.09 PK	74	-24.91	-57.7	-52.16	4.92	-46.17
8	22218.5	37.93 AV	54	-16.07	-64.99	-65.55	4.92	-57.33
9	38768.8	41.64 PK	74	-32.36	-60.23	-63.46	4.92	-53.62
10	38826.4	31.22 AV	54	-22.78	-72.21	-71.75	4.92	-64.04

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

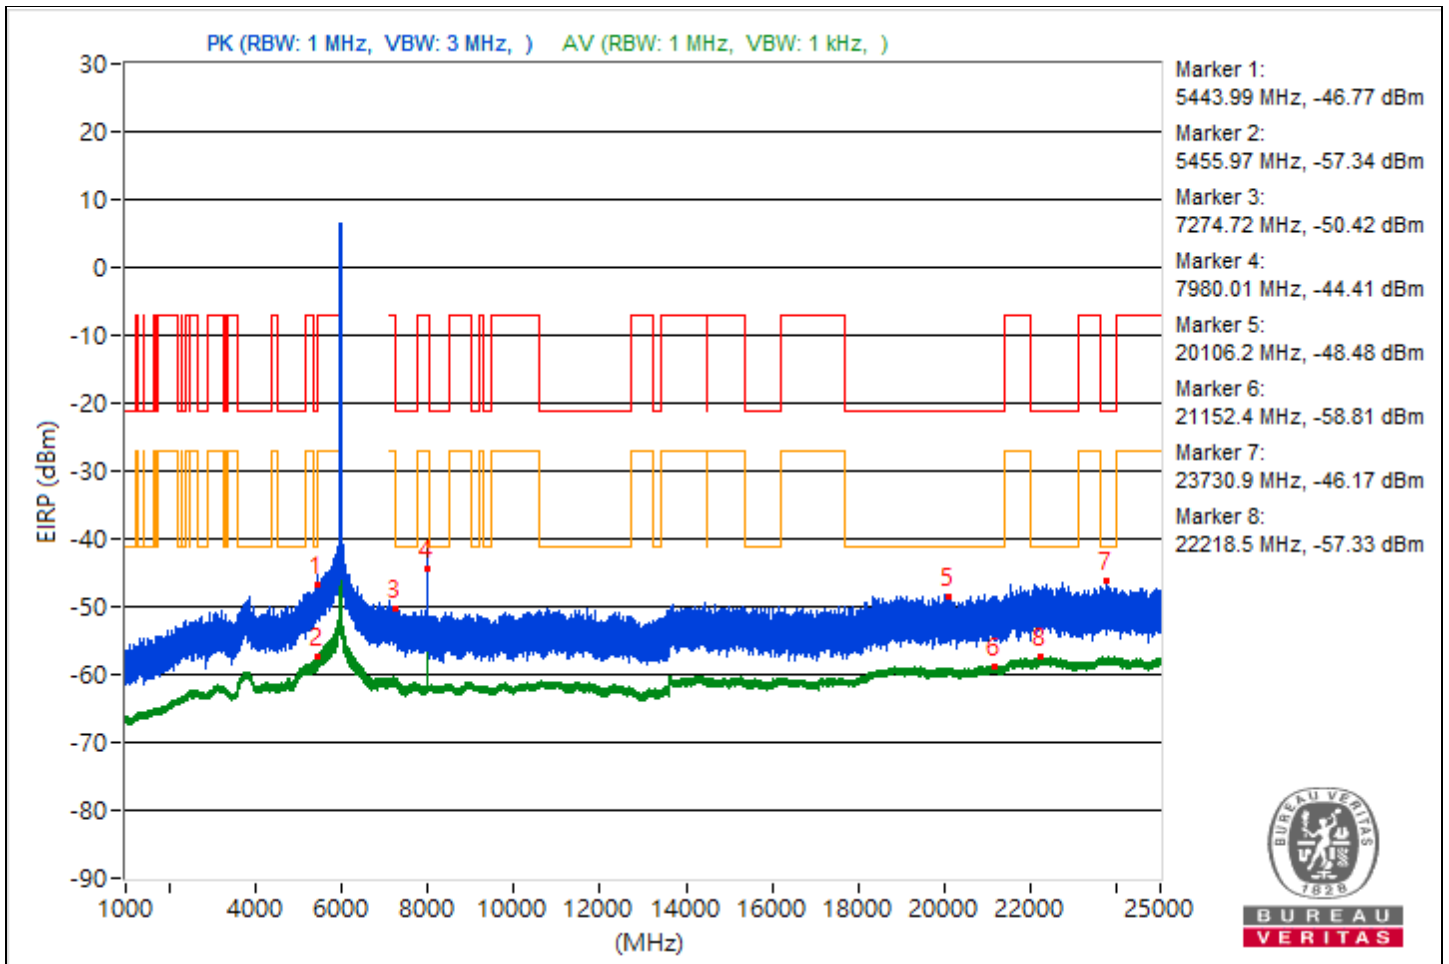

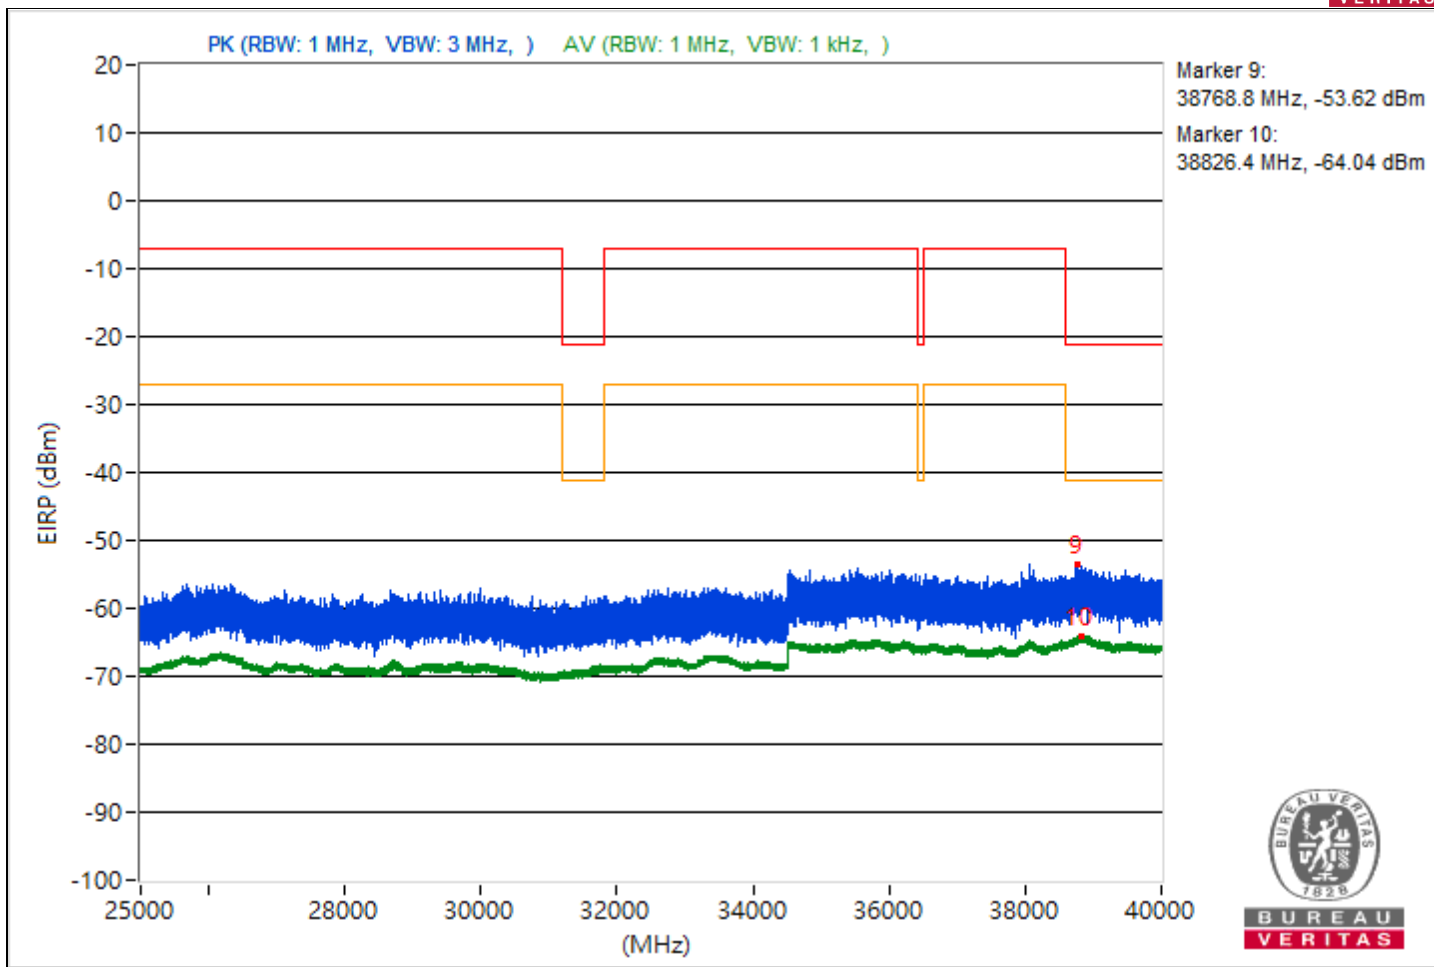





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5096.32	47.56 PK	74	-26.44	-53.75	-59.02	4.92	-47.7
2	5457.13	37.06 AV	54	-16.94	-66.39	-65.89	4.92	-58.2
3	8193.33	52.7 PK	74	-21.3	-50.87	-50.15	4.92	-42.56
4	8193.33	49.57 AV	54	-4.43	-53.52	-53.72	4.92	-45.69
5	19116.4	47.5 PK	74	-26.5	-57.58	-54.38	4.92	-47.76
6	21141.7	36.44 AV	54	-17.56	-66.21	-67.36	4.92	-58.82
7	23847.9	48.81 PK	74	-25.19	-52.25	-58.76	4.92	-46.45
8	22301.8	37.88 AV	54	-16.12	-64.98	-65.67	4.92	-57.38
9	38873.96	41.65 PK	74	-32.35	-64.88	-59.68	4.92	-53.61
10	38804	31.29 AV	54	-22.71	-72.31	-71.53	4.92	-63.97

Note: Margin value = Emission Level - Limit value

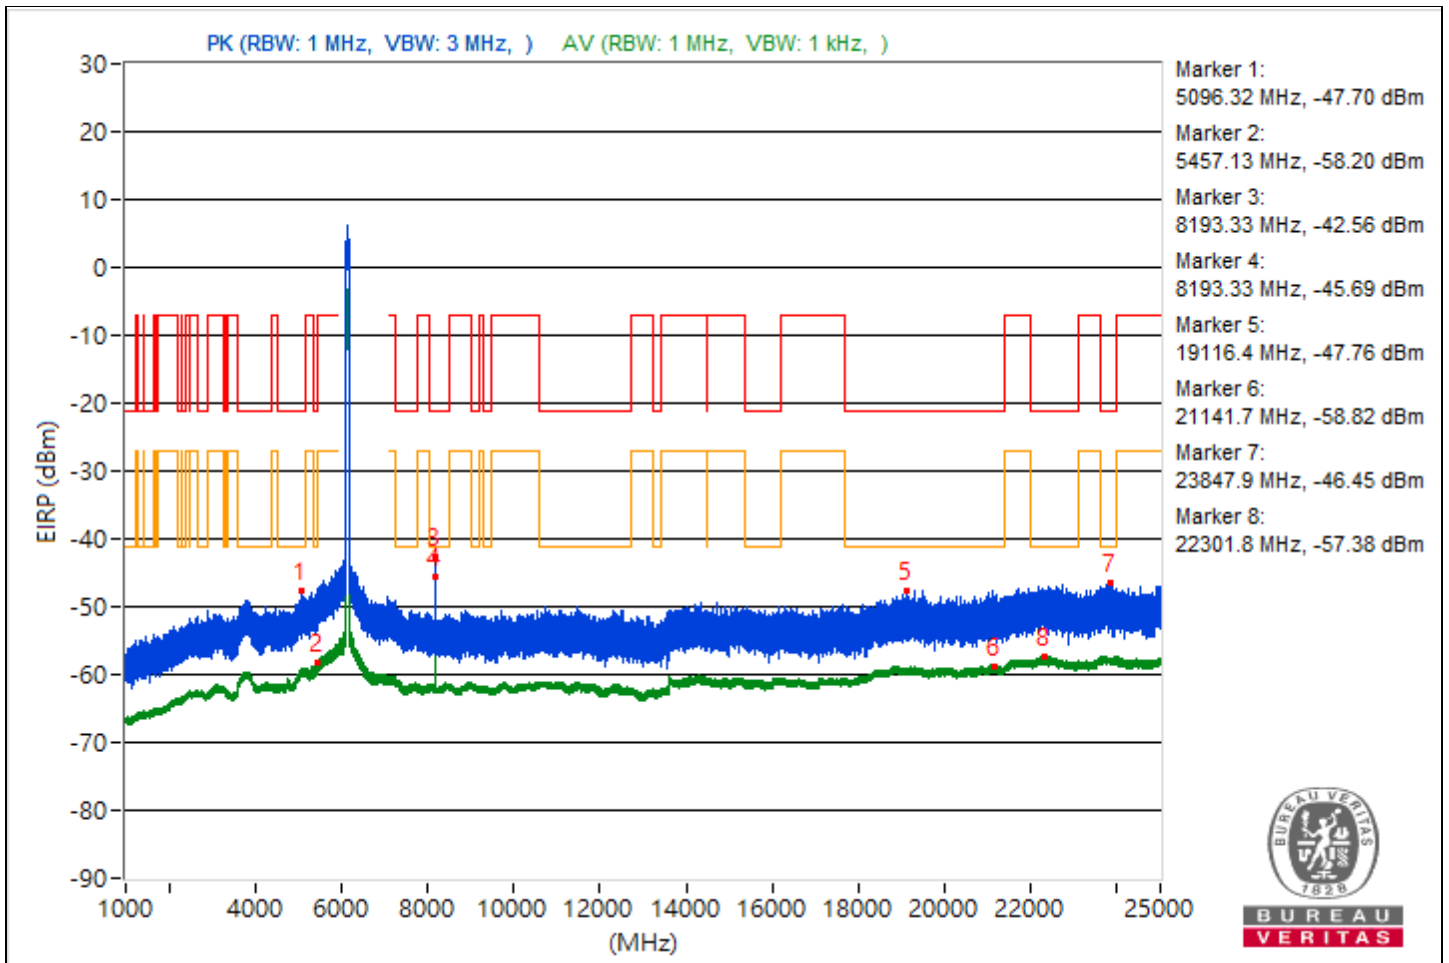

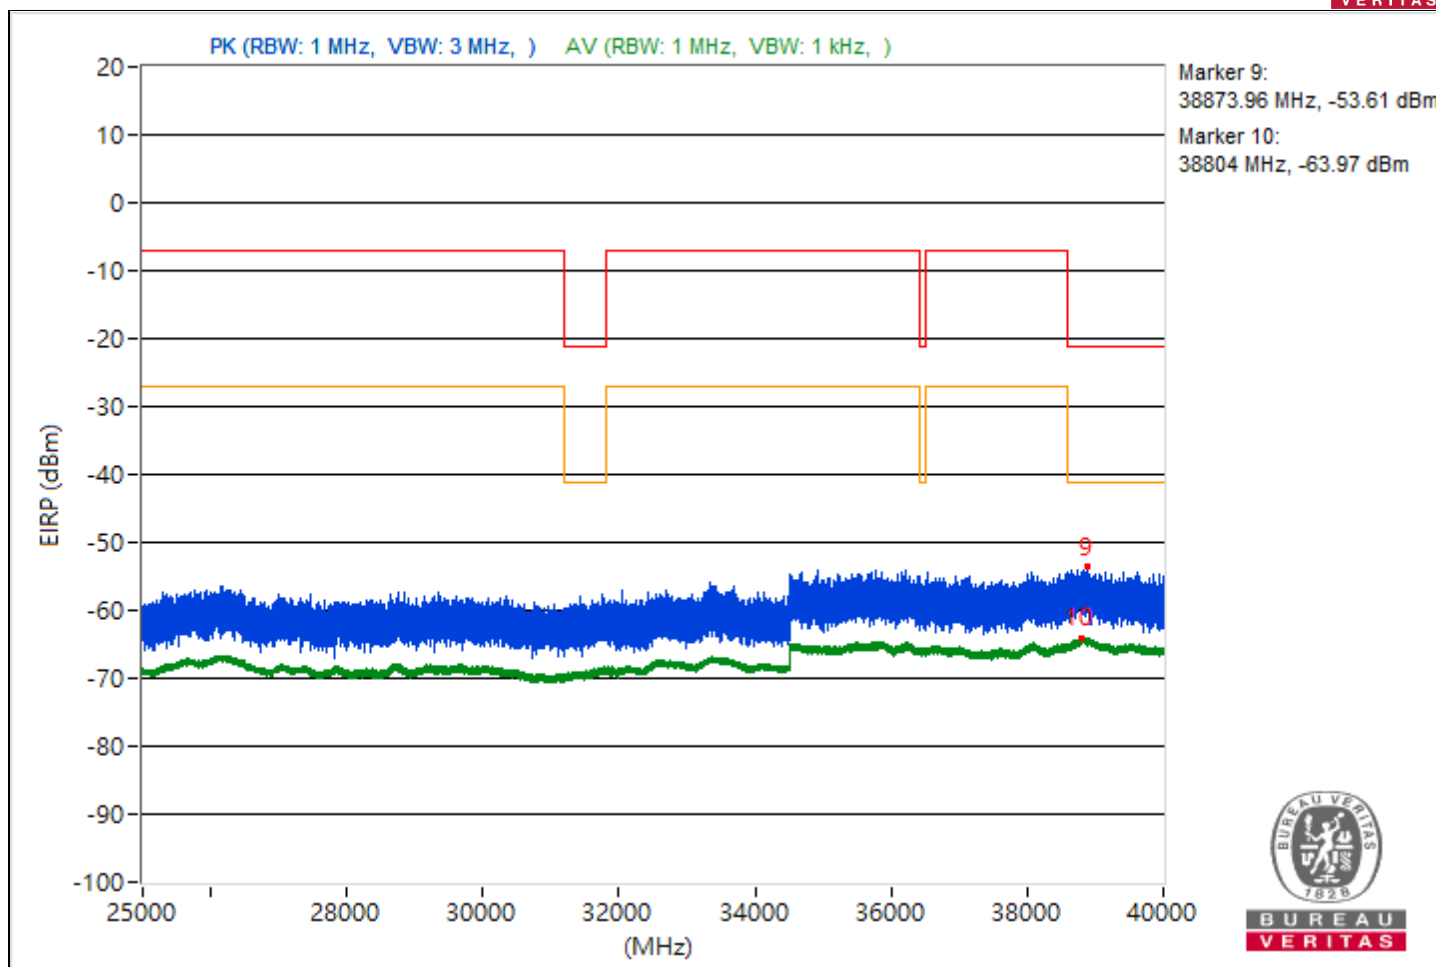





RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3877.78	46.12 PK	74	-27.88	-61.36	-54.95	4.92	-49.14
2	3806.22	35.48 AV	54	-18.52	-67.22	-68.28	4.92	-59.78
3	15817.87	45.46 PK	74	-28.54	-64.5	-55.2	4.92	-49.8
4	7256.06	34.66 AV	54	-19.34	-69.71	-67.6	4.92	-60.6
5	21065.9	47.69 PK	74	-26.31	-53.2	-60.74	4.92	-47.57
6	21165	36.67 AV	54	-17.33	-66.63	-66.41	4.92	-58.59
7	22261.8	47.95 PK	74	-26.05	-53.32	-58.76	4.92	-47.31
8	23647.4	37.79 AV	54	-16.21	-65.06	-65.77	4.92	-57.47
9	38813.96	41.2 PK	74	-32.8	-64.85	-60.28	4.92	-54.06
10	38809.33	31.23 AV	54	-22.77	-71.62	-72.34	4.92	-64.03

Note: Margin value = Emission Level - Limit value

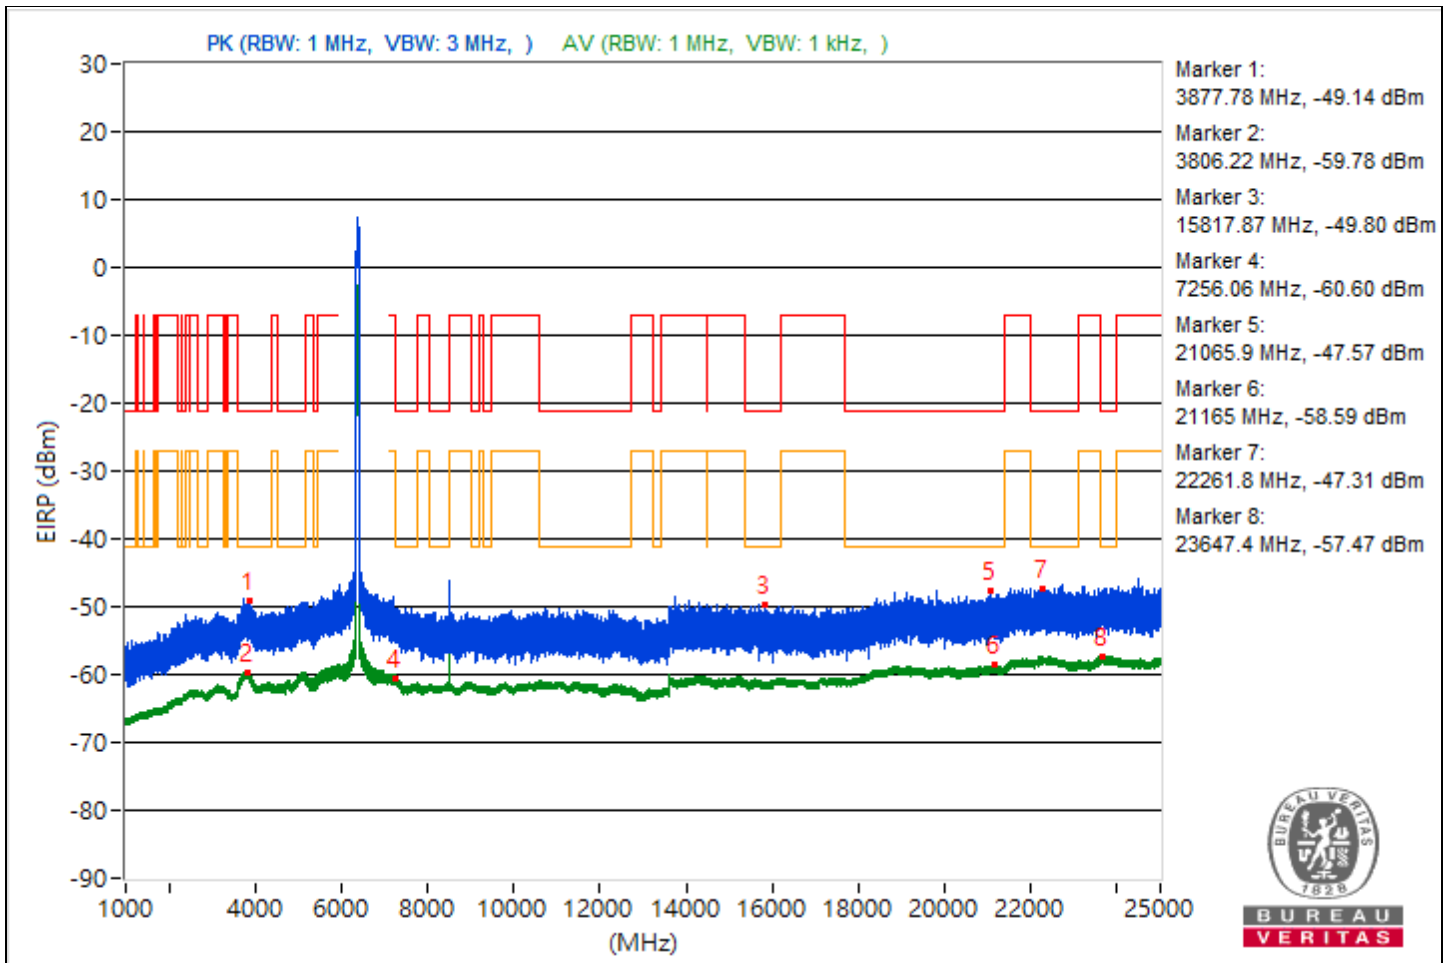

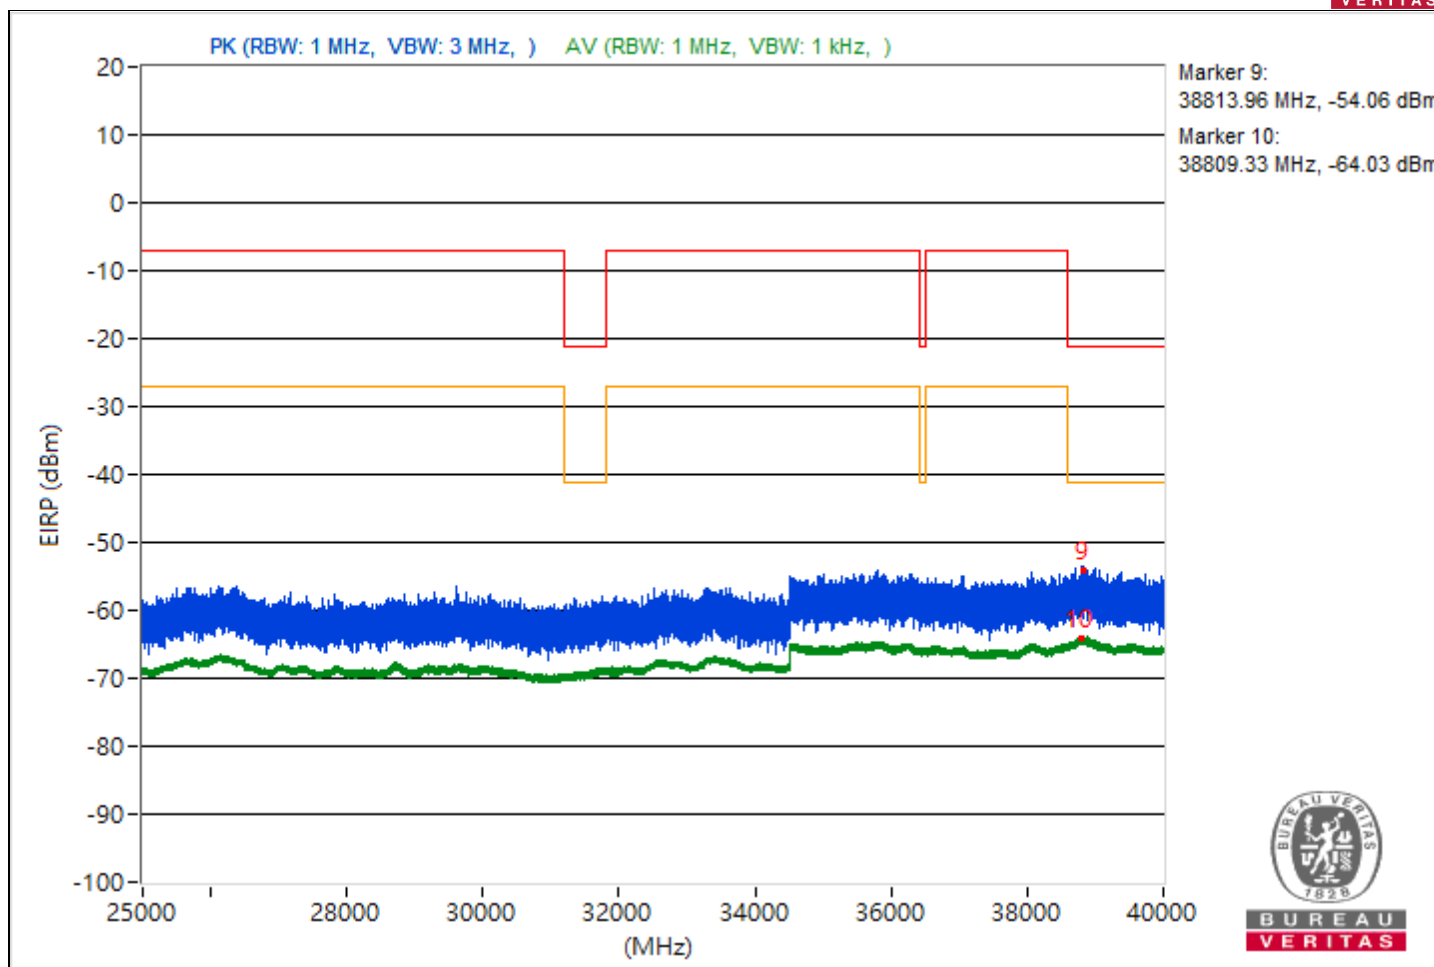





RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.2	46.17 PK	74	-27.83	-59.97	-55.28	4.92	-49.09
2	5143.61	35.77 AV	54	-18.23	-67.73	-67.14	4.92	-59.49
3	7267.64	46.66 PK	74	-27.34	-55.2	-58.46	4.92	-48.6
4	7253.41	35.81 AV	54	-18.19	-66.94	-67.88	4.92	-59.45
5	19581.6	47.34 PK	74	-26.66	-53.33	-62.61	4.92	-47.92
6	21152.3	36.71 AV	54	-17.29	-66.25	-66.72	4.92	-58.55
7	23681.9	49.17 PK	74	-24.83	-55.47	-52.94	4.92	-46.09
8	22196.5	37.89 AV	54	-16.11	-64.62	-66.11	4.92	-57.37
9	38678.58	40.92 PK	74	-33.08	-67.02	-60.06	4.92	-54.34
10	38800.71	31.2 AV	54	-22.8	-72.46	-71.56	4.92	-64.06

Note: Margin value = Emission Level - Limit value

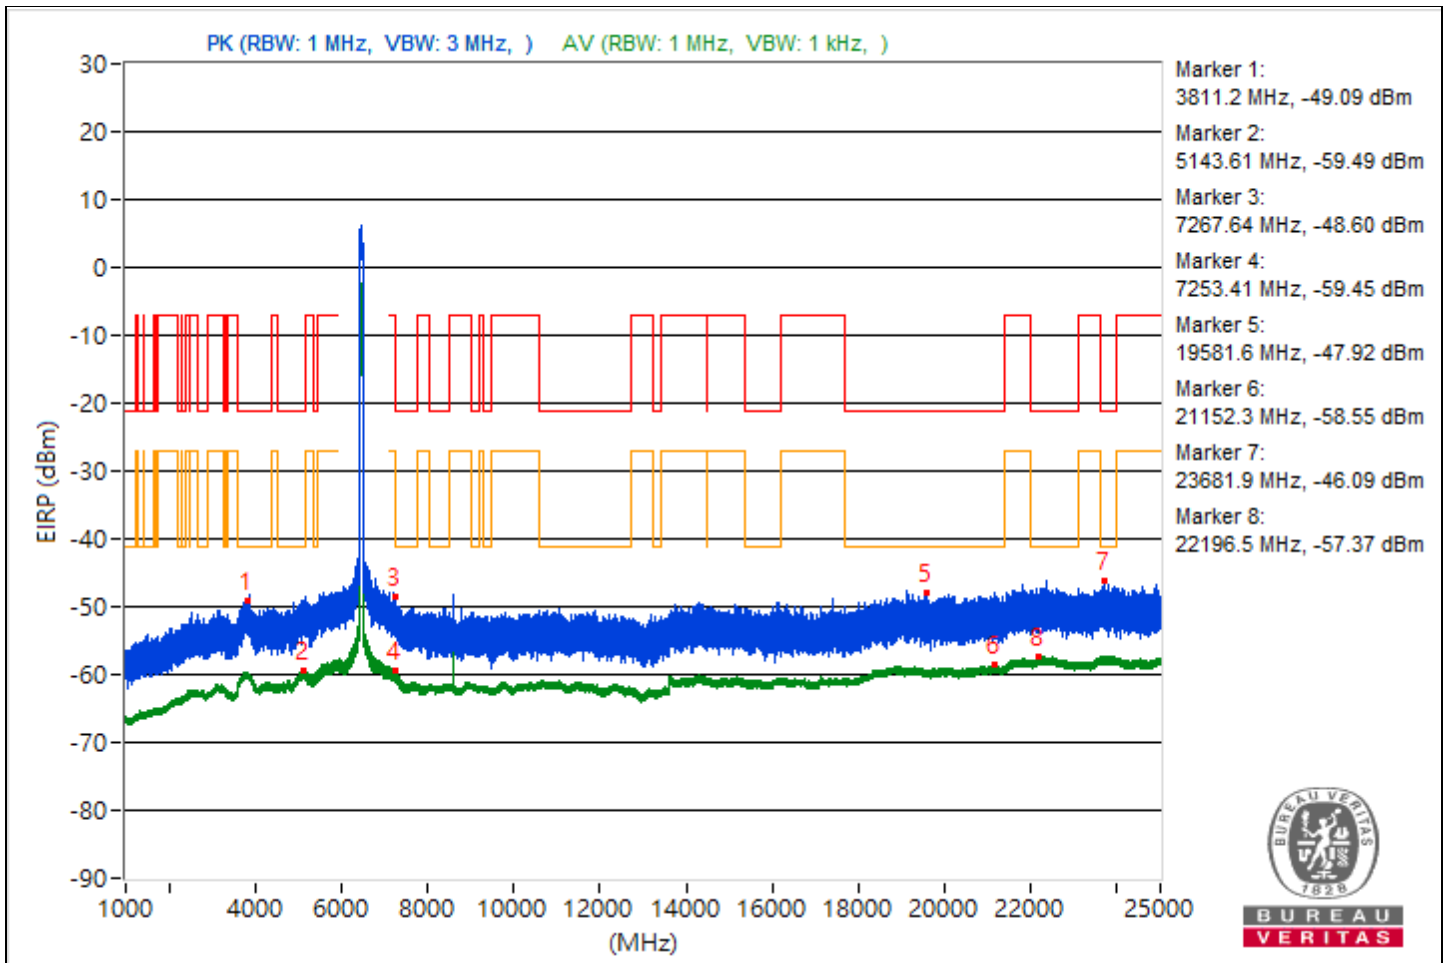

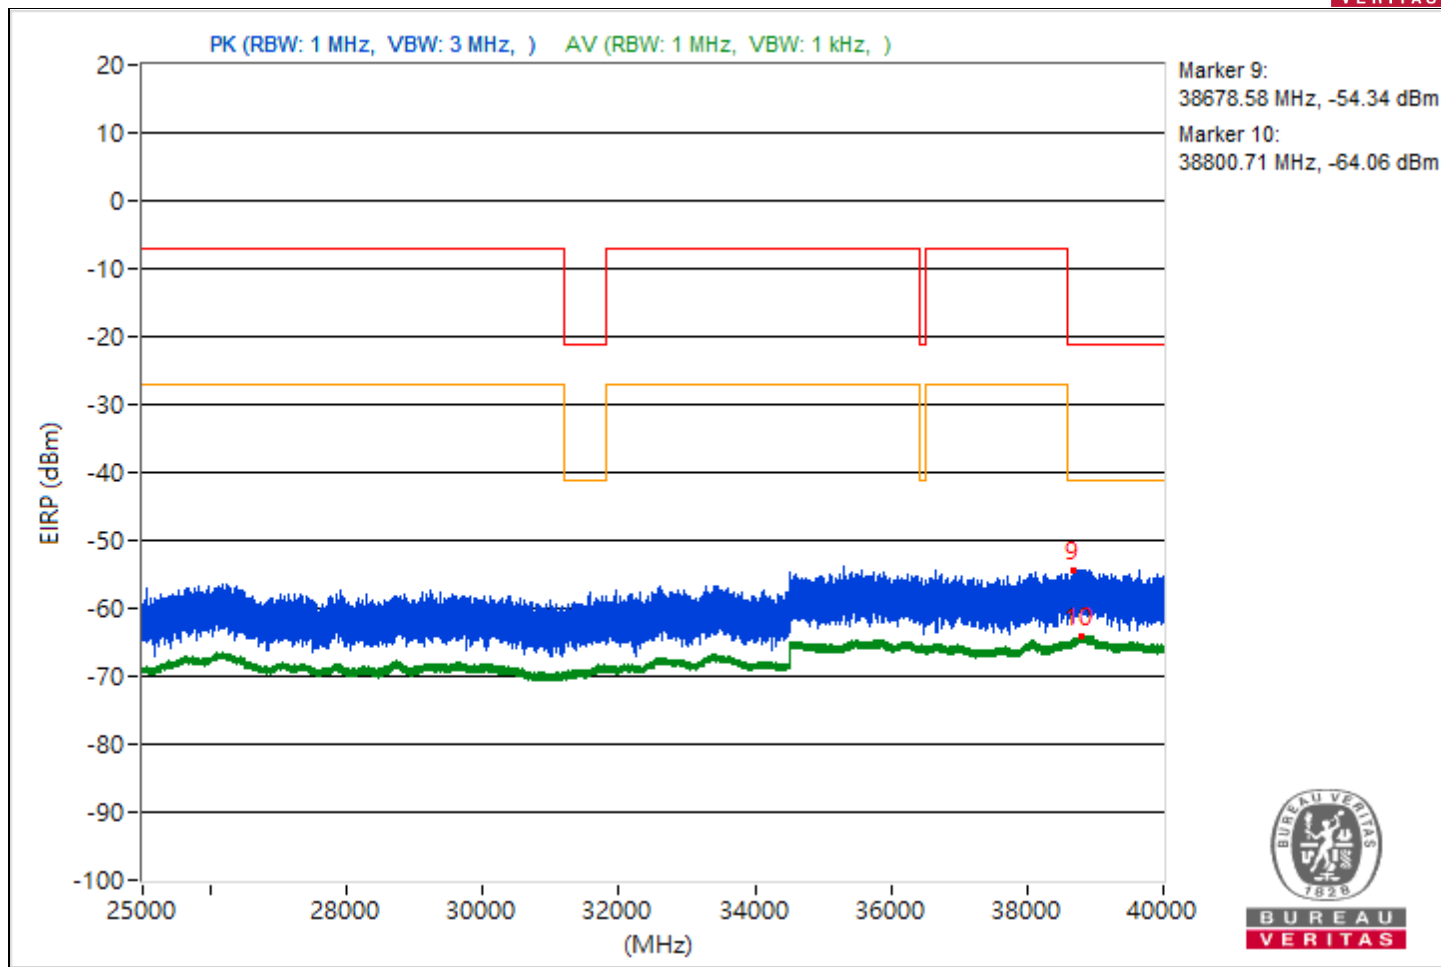





RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5061.32	46.11 PK	74	-27.89	-59.91	-55.38	4.92	-49.15
2	3812.37	35.68 AV	54	-18.32	-67.3	-67.74	4.92	-59.58
3	7385.79	45.69 PK	74	-28.31	-55.57	-61.09	4.92	-49.57
4	7251.62	35.39 AV	54	-18.61	-68	-67.61	4.92	-59.87
5	20819.4	47.94 PK	74	-26.06	-57.35	-53.85	4.92	-47.32
6	21084.7	36.57 AV	54	-17.43	-66.28	-66.98	4.92	-58.69
7	23937.7	48.96 PK	74	-25.04	-52.38	-57.53	4.92	-46.3
8	22379.8	38.03 AV	54	-15.97	-65.37	-64.96	4.92	-57.23
9	38797.42	41.69 PK	74	-32.31	-59.34	-65.99	4.92	-53.57
10	38806.49	31.21 AV	54	-22.79	-72.2	-71.76	4.92	-64.05

Note: Margin value = Emission Level - Limit value

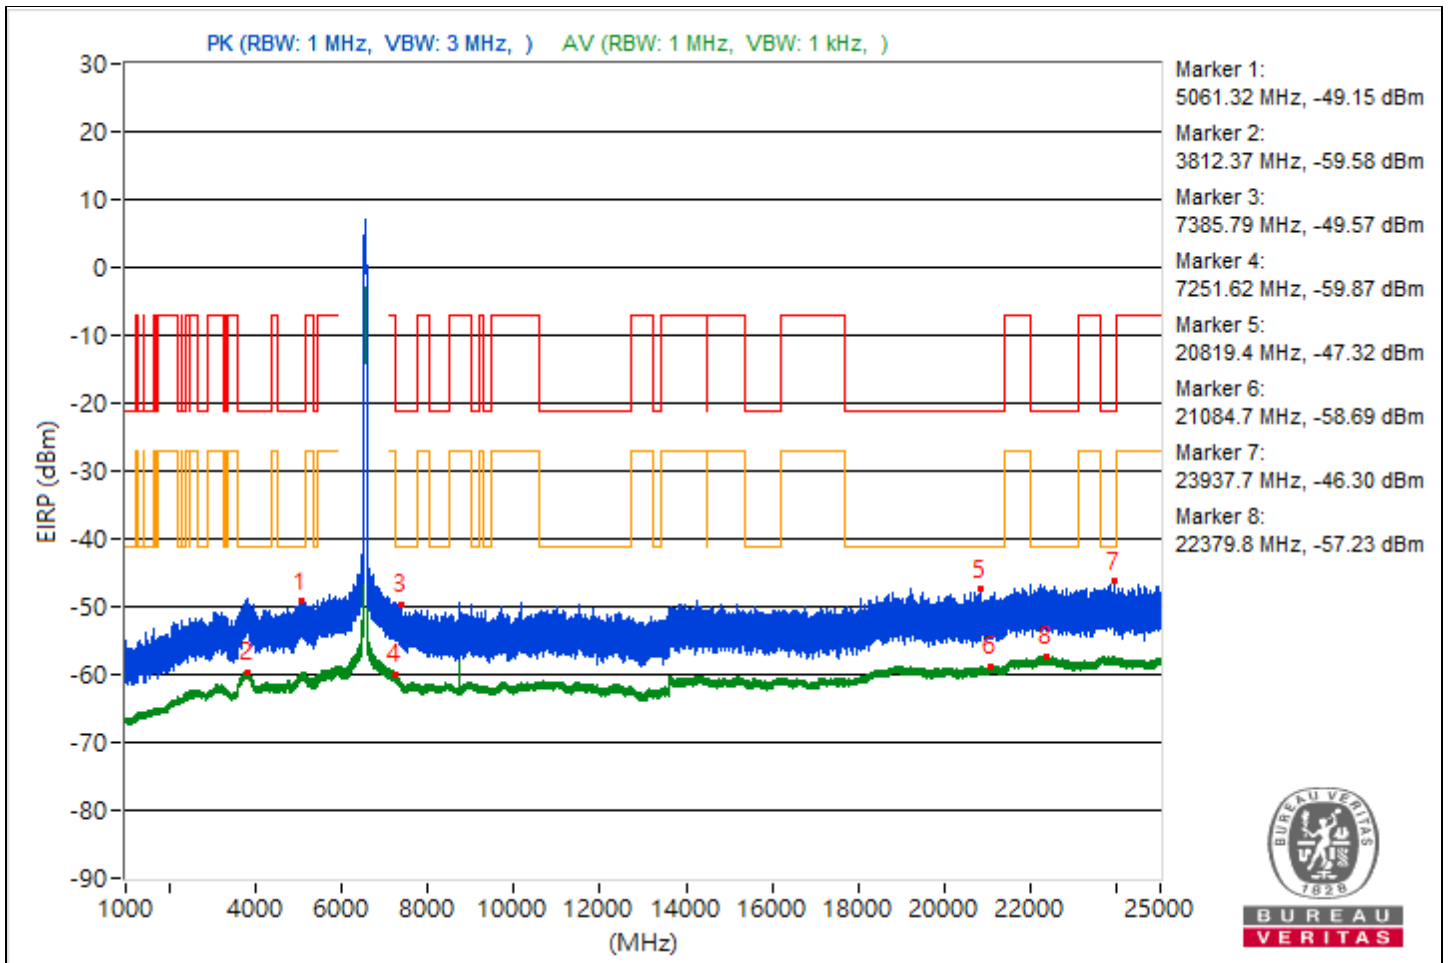

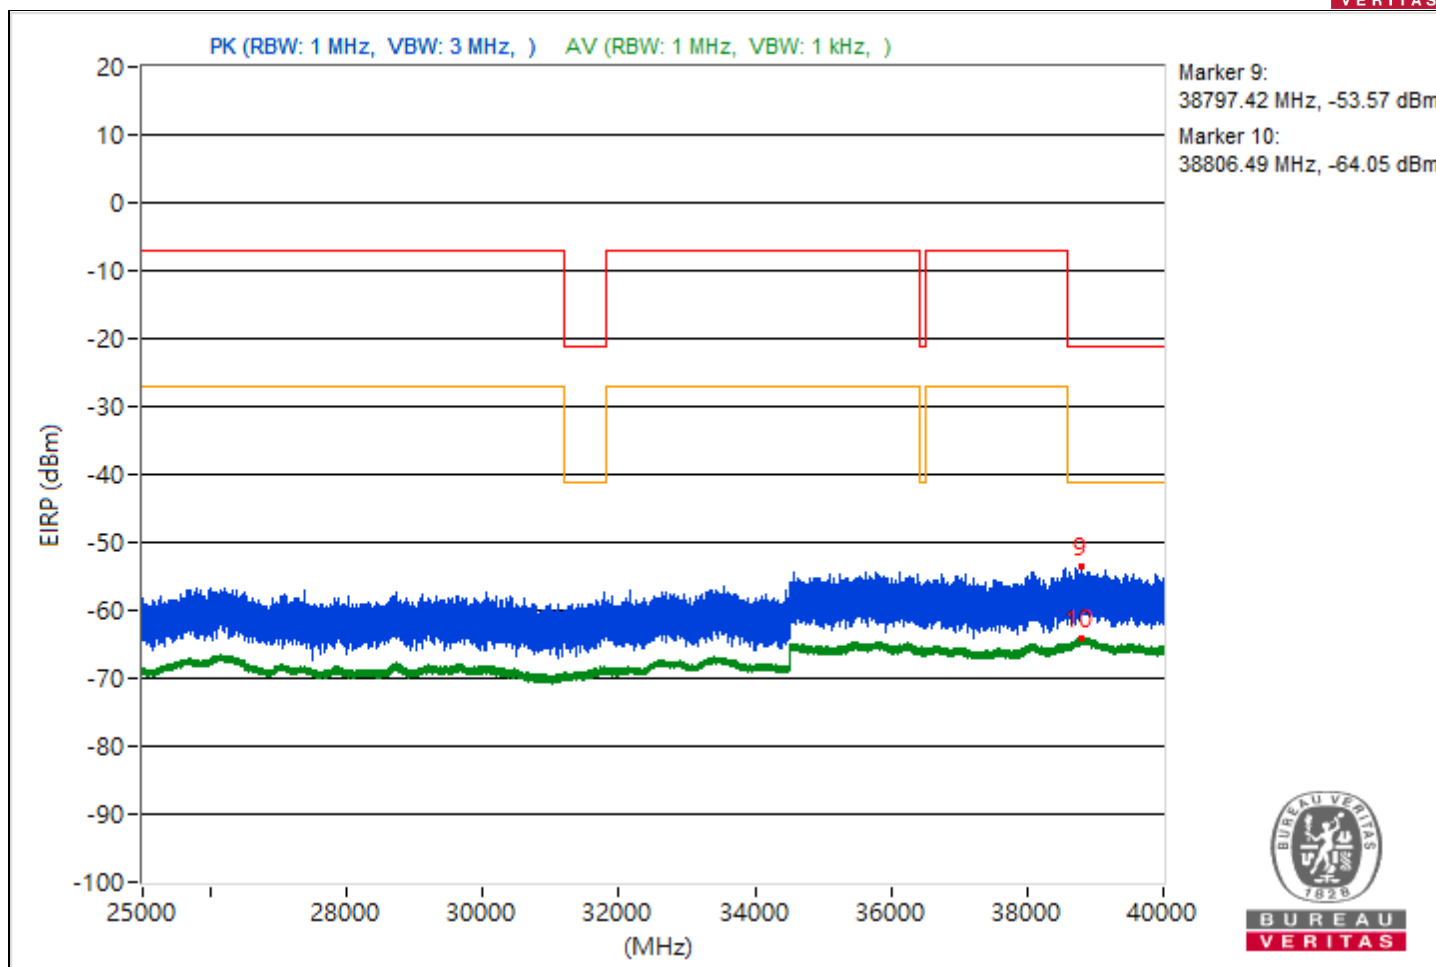





RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3723.93	46.24 PK	74	-27.76	-55.32	-59.58	4.92	-49.02
2	3797.74	35.74 AV	54	-18.26	-67.18	-67.73	4.92	-59.52
3	7286.93	45.8 PK	74	-28.2	-55.72	-60.15	4.92	-49.46
4	7272.39	36.05 AV	54	-17.95	-66.69	-67.64	4.92	-59.21
5	20850.3	46.77 PK	74	-27.23	-60.87	-54.27	4.92	-48.49
6	21390.4	36.49 AV	54	-17.51	-67.24	-66.23	4.92	-58.77
7	23643	48.91 PK	74	-25.09	-52.82	-56.49	4.92	-46.35
8	23801.7	37.87 AV	54	-16.13	-64.89	-65.8	4.92	-57.39
9	38910.67	41.72 PK	74	-32.28	-58.9	-68.62	4.92	-53.54
10	38827.82	31.14 AV	54	-22.86	-71.58	-72.58	4.92	-64.12

Note: Margin value = Emission Level - Limit value

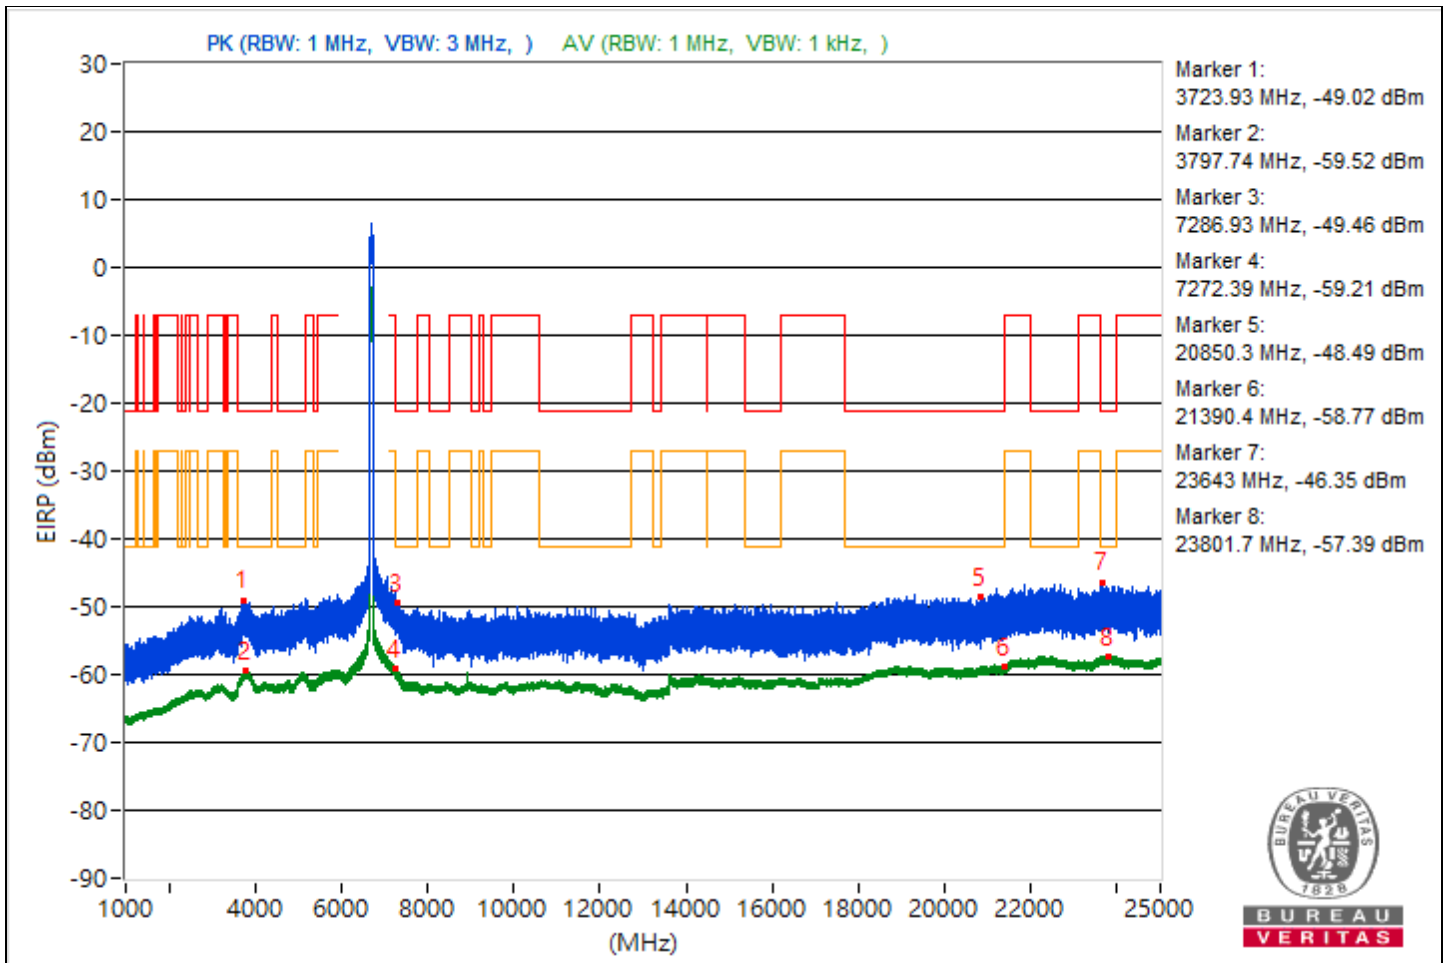

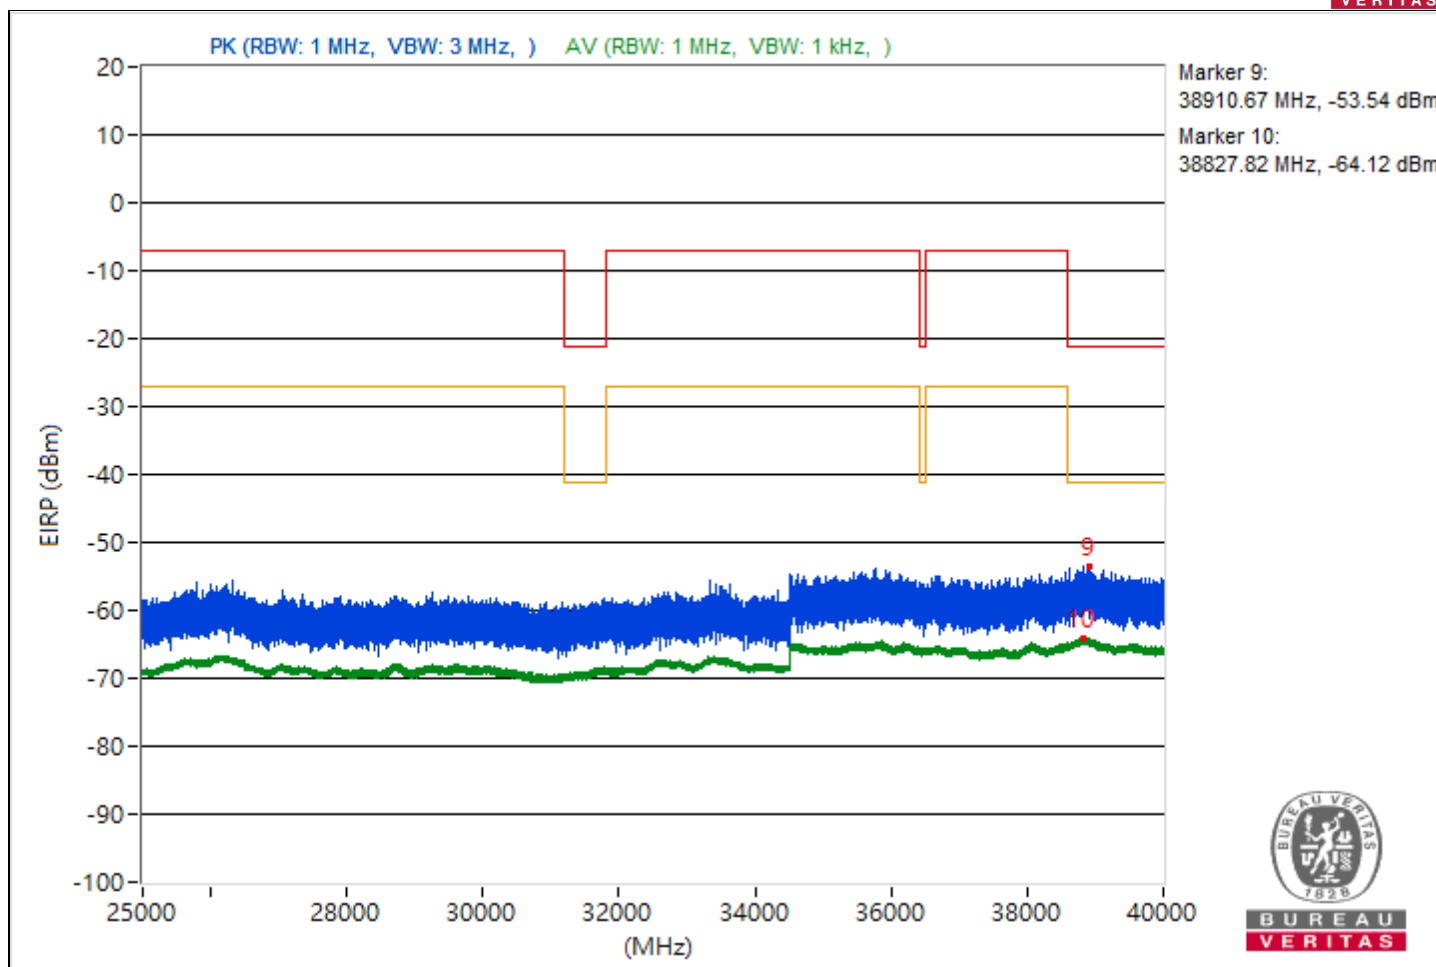





RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5025.47	46.06 PK	74	-27.94	-55.83	-58.99	4.92	-49.2
2	3781.41	35.64 AV	54	-18.36	-67.16	-67.99	4.92	-59.62
3	7269.82	47.86 PK	74	-26.14	-54.44	-56.46	4.92	-47.4
4	7251.08	36.95 AV	54	-17.05	-66.44	-66.05	4.92	-58.31
5	21307.8	47.68 PK	74	-26.32	-58.61	-53.72	4.92	-47.58
6	21079	36.79 AV	54	-17.21	-66.72	-66.11	4.92	-58.47
7	22294	48.94 PK	74	-25.06	-56.77	-52.67	4.92	-46.32
8	22303.5	37.97 AV	54	-16.03	-65.36	-65.08	4.92	-57.29
9	38769.16	40.98 PK	74	-33.02	-69.73	-59.61	4.92	-54.28
10	38878.67	31.26 AV	54	-22.74	-72.24	-71.65	4.92	-64

Note: Margin value = Emission Level - Limit value

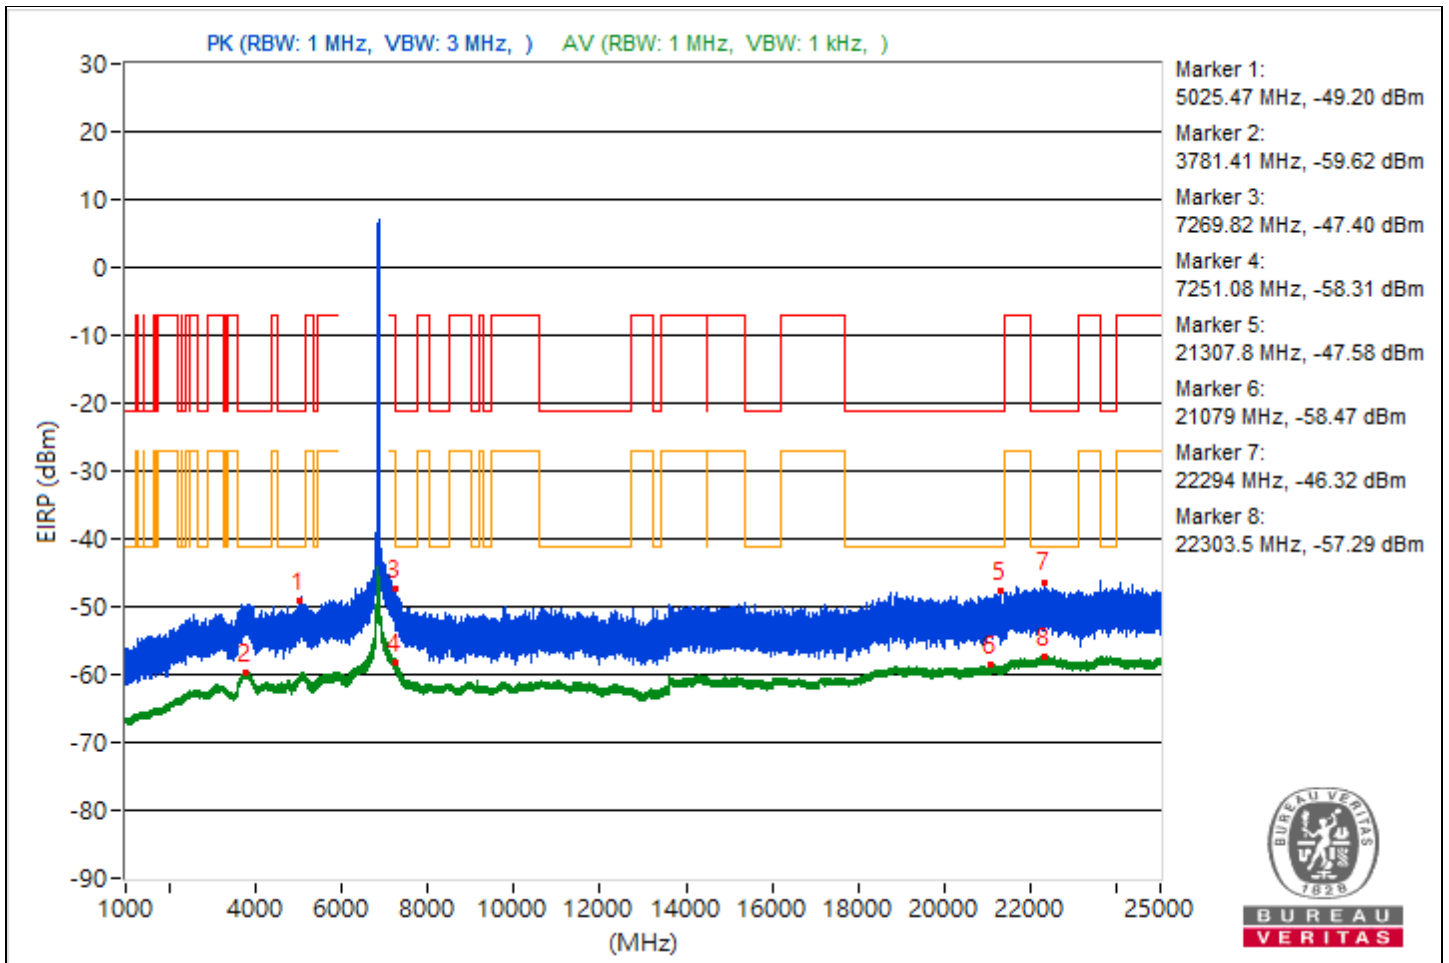

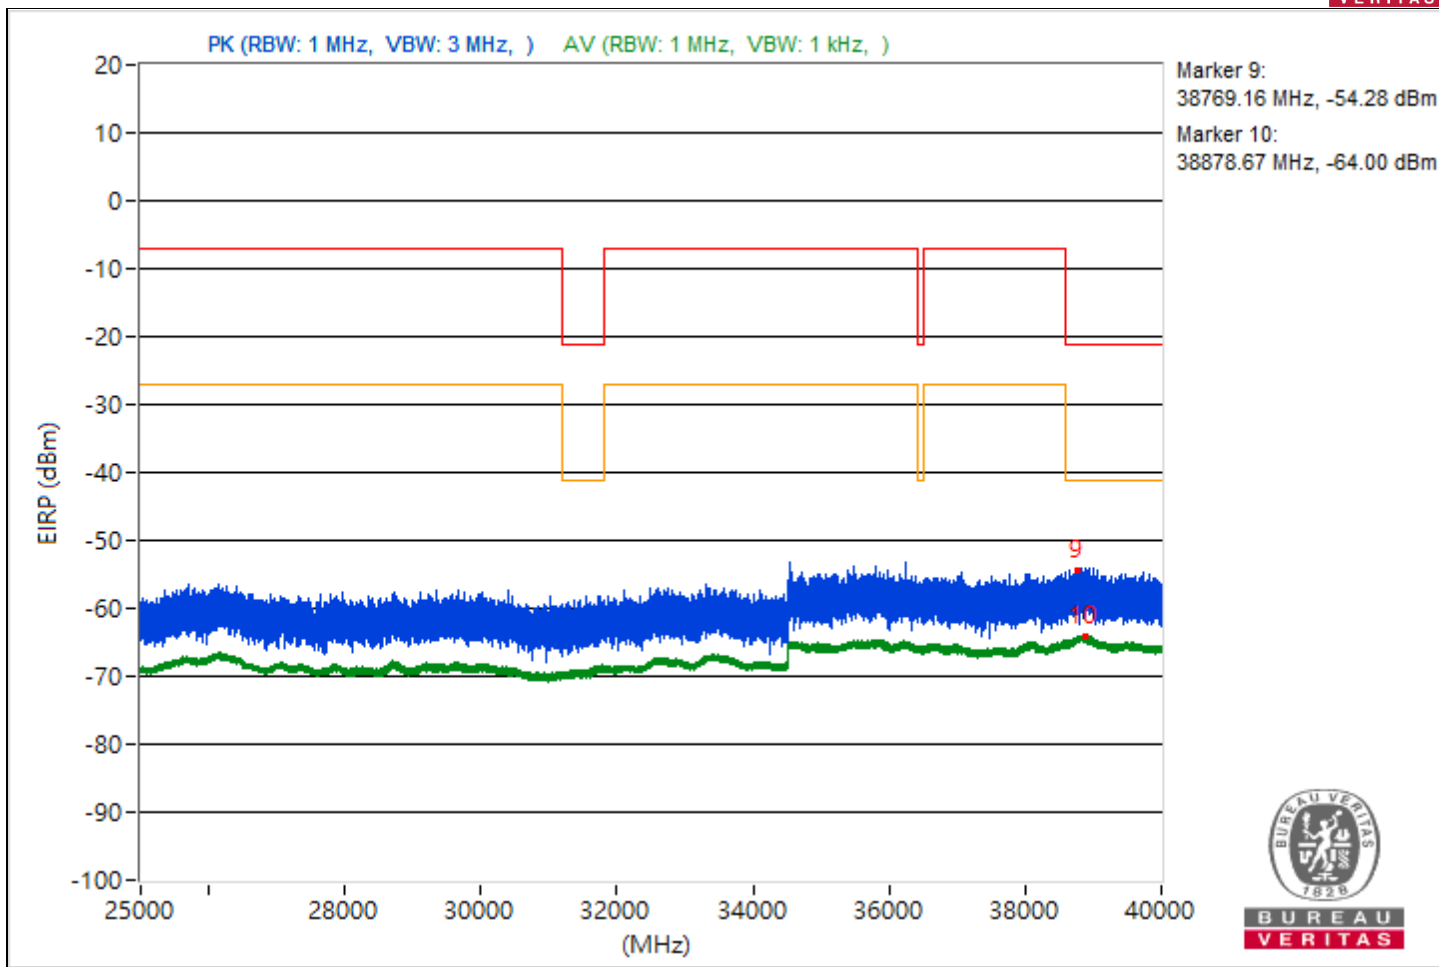





RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3892.24	46.33 PK	74	-27.67	-55.25	-59.46	4.92	-48.93
2	3813.38	35.57 AV	54	-18.43	-67.27	-68	4.92	-59.69
3	7258.16	47.74 PK	74	-26.26	-58.18	-53.79	4.92	-47.52
4	7261.19	37.81 AV	54	-16.19	-64.99	-65.81	4.92	-57.45
5	20987.9	46.61 PK	74	-27.39	-59.42	-54.87	4.92	-48.65
6	21086.3	36.62 AV	54	-17.38	-66.94	-66.22	4.92	-58.64
7	22555.7	48.39 PK	74	-25.61	-53.07	-57.71	4.92	-46.87
8	23683.3	37.81 AV	54	-16.19	-65.02	-65.77	4.92	-57.45
9	38990.58	41.32 PK	74	-32.68	-60.16	-64.73	4.92	-53.94
10	38816	31.19 AV	54	-22.81	-72.37	-71.66	4.92	-64.07

Note: Margin value = Emission Level - Limit value

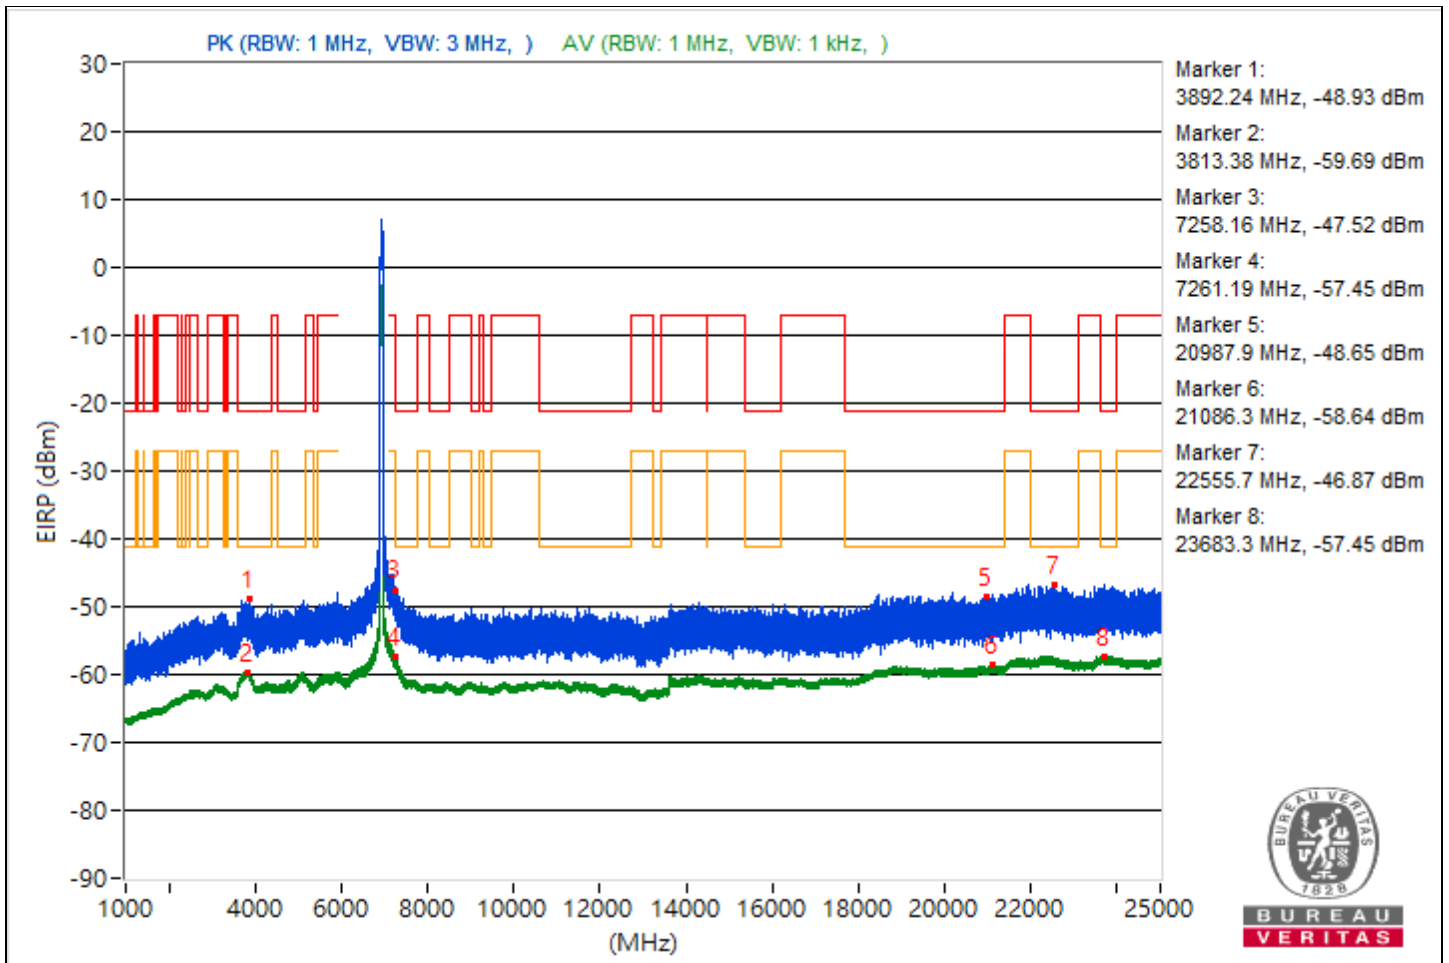

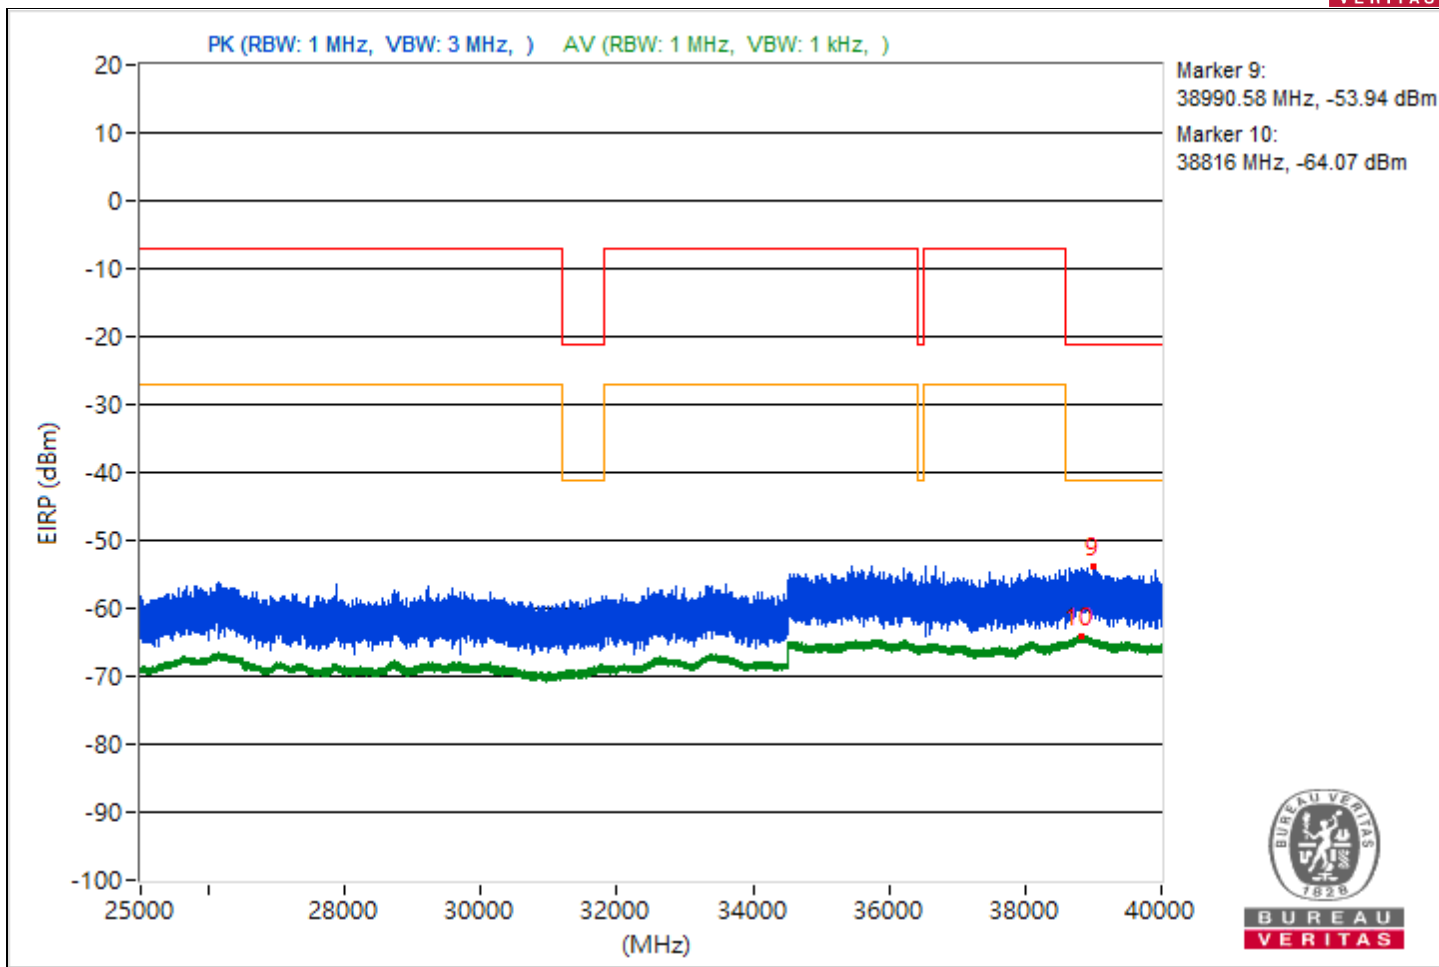





RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.88	45.77 PK	74	-28.23	-60.74	-55.56	4.92	-49.49
2	3795.72	35.48 AV	54	-18.52	-67.29	-68.17	4.92	-59.78
3	7261.81	49.4 PK	74	-24.6	-52.24	-56.22	4.92	-45.86
4	7257.77	39.06 AV	54	-14.94	-64.22	-64.05	4.92	-56.2
5	21086.2	47.33 PK	74	-26.67	-53.69	-60.42	4.92	-47.93
6	21141	36.58 AV	54	-17.42	-66.19	-67.08	4.92	-58.68
7	23981.6	48.06 PK	74	-25.94	-53.53	-57.67	4.92	-47.2
8	23908.6	38 AV	54	-16	-64.97	-65.43	4.92	-57.26
9	38893.51	41.5 PK	74	-32.5	-59.98	-64.54	4.92	-53.76
10	38817.51	31.15 AV	54	-22.85	-71.45	-72.72	4.92	-64.11

Note: Margin value = Emission Level - Limit value

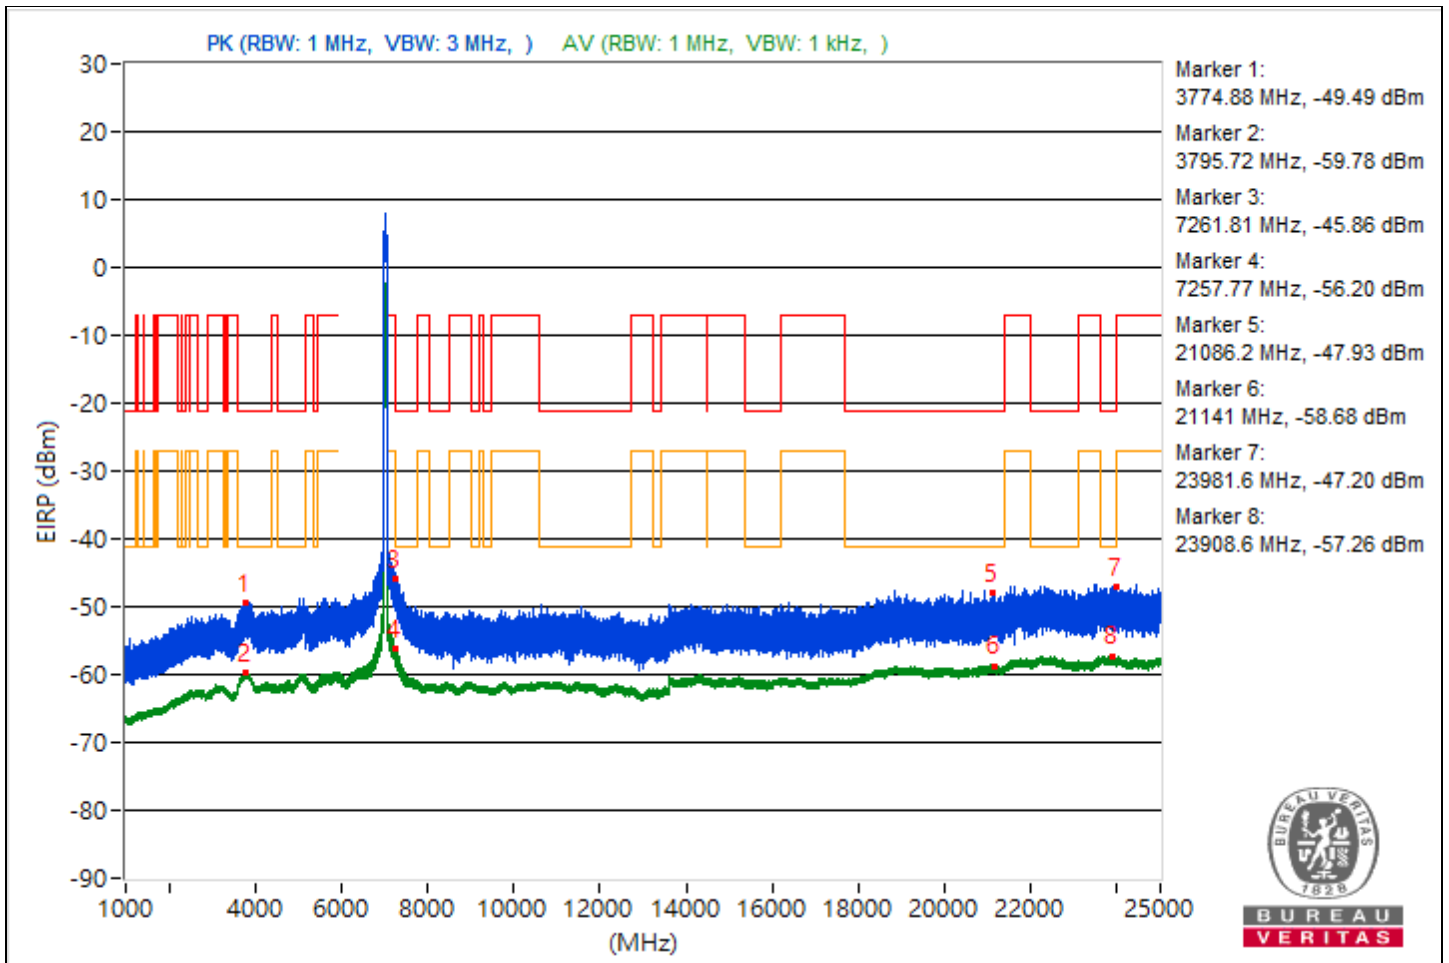

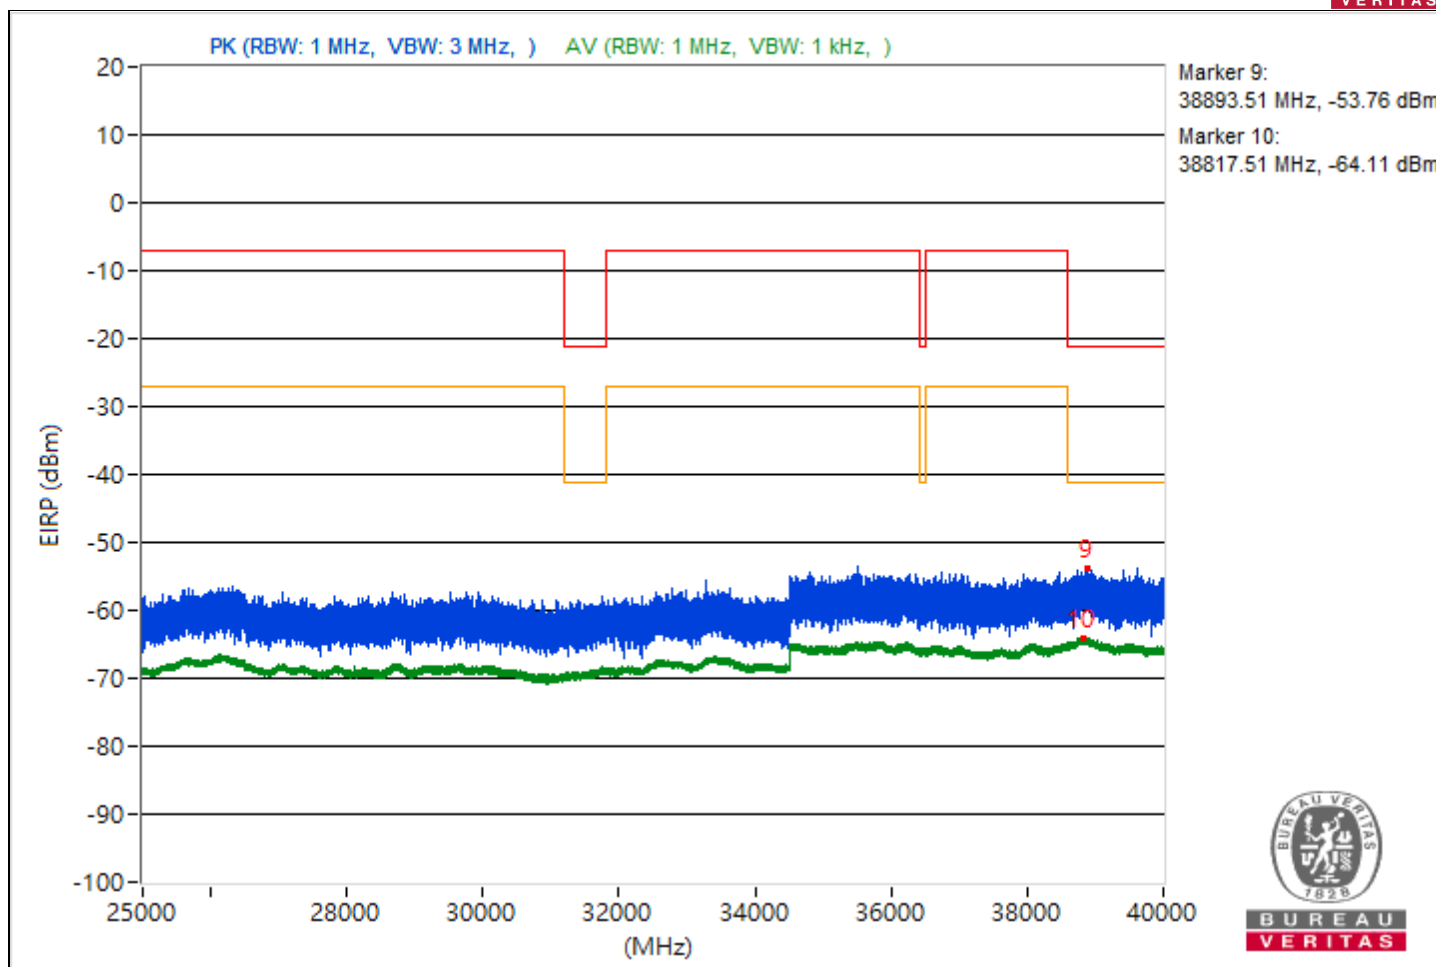





RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5442.9	48.44 PK	74	-25.56	-56.08	-53.74	4.92	-46.82
2	5446.79	37.88 AV	54	-16.12	-65.87	-64.83	4.92	-57.38
3	8033.42	52.3 PK	74	-21.7	-50.75	-51.03	4.92	-42.96
4	8033.16	49.69 AV	54	-4.31	-53.47	-53.54	4.92	-45.57
5	18888.3	47.17 PK	74	-26.83	-61.19	-53.73	4.92	-48.09
6	21121.9	36.42 AV	54	-17.58	-66.58	-66.96	4.92	-58.84
7	23735.8	48.13 PK	74	-25.87	-53.16	-58.51	4.92	-47.13
8	22316.2	37.77 AV	54	-16.23	-65.86	-65.02	4.92	-57.49
9	38803.56	40.8 PK	74	-33.2	-60.59	-65.53	4.92	-54.46
10	38862.13	31.08 AV	54	-22.92	-72.72	-71.58	4.92	-64.18

Note: Margin value = Emission Level - Limit value

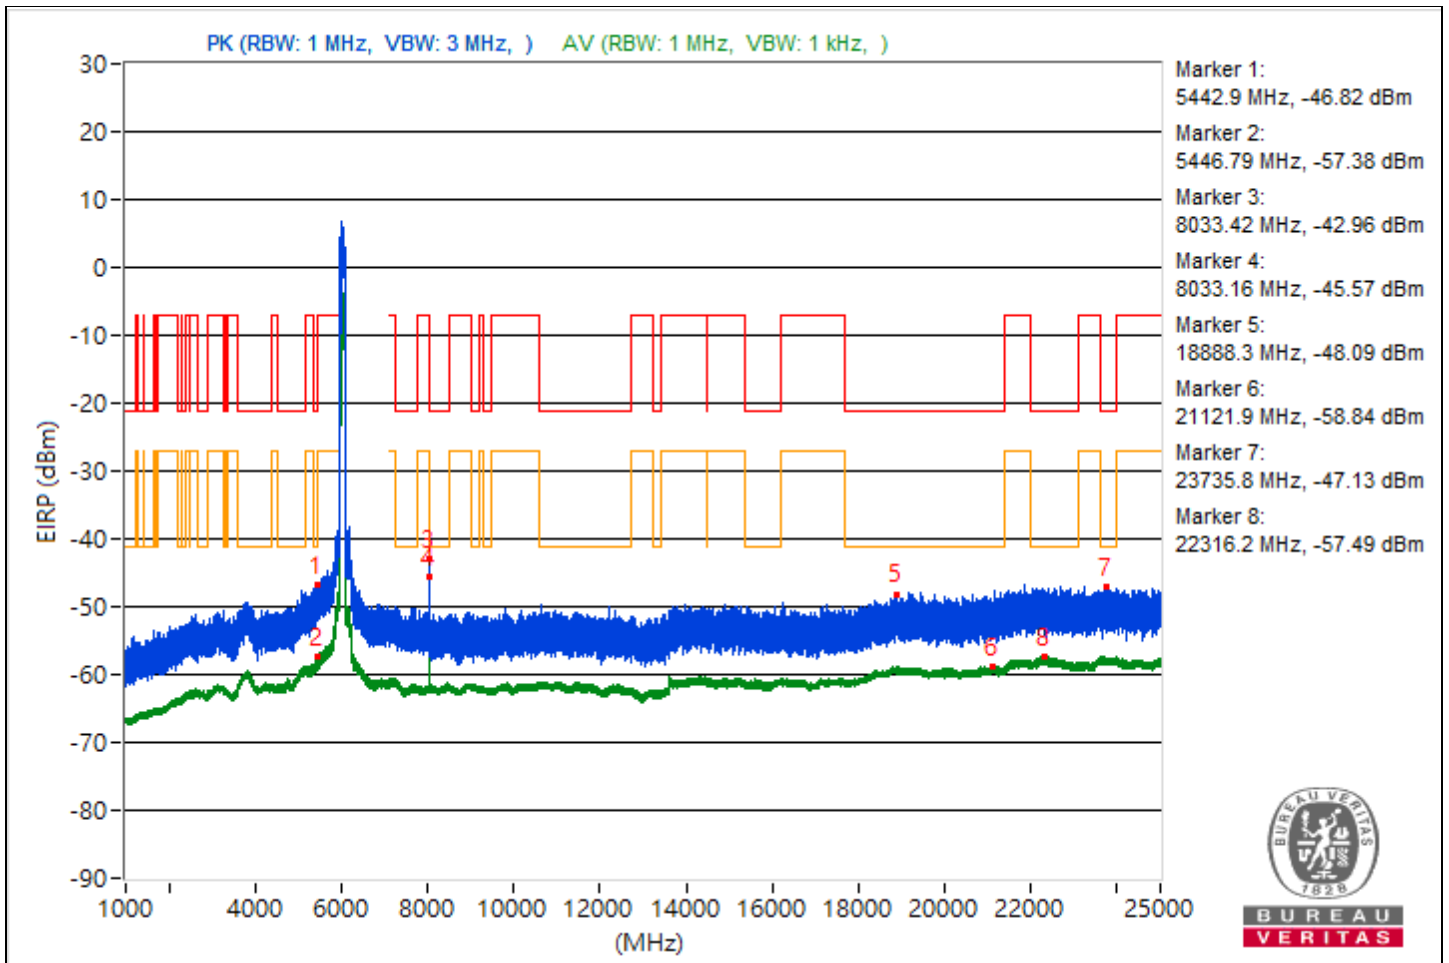

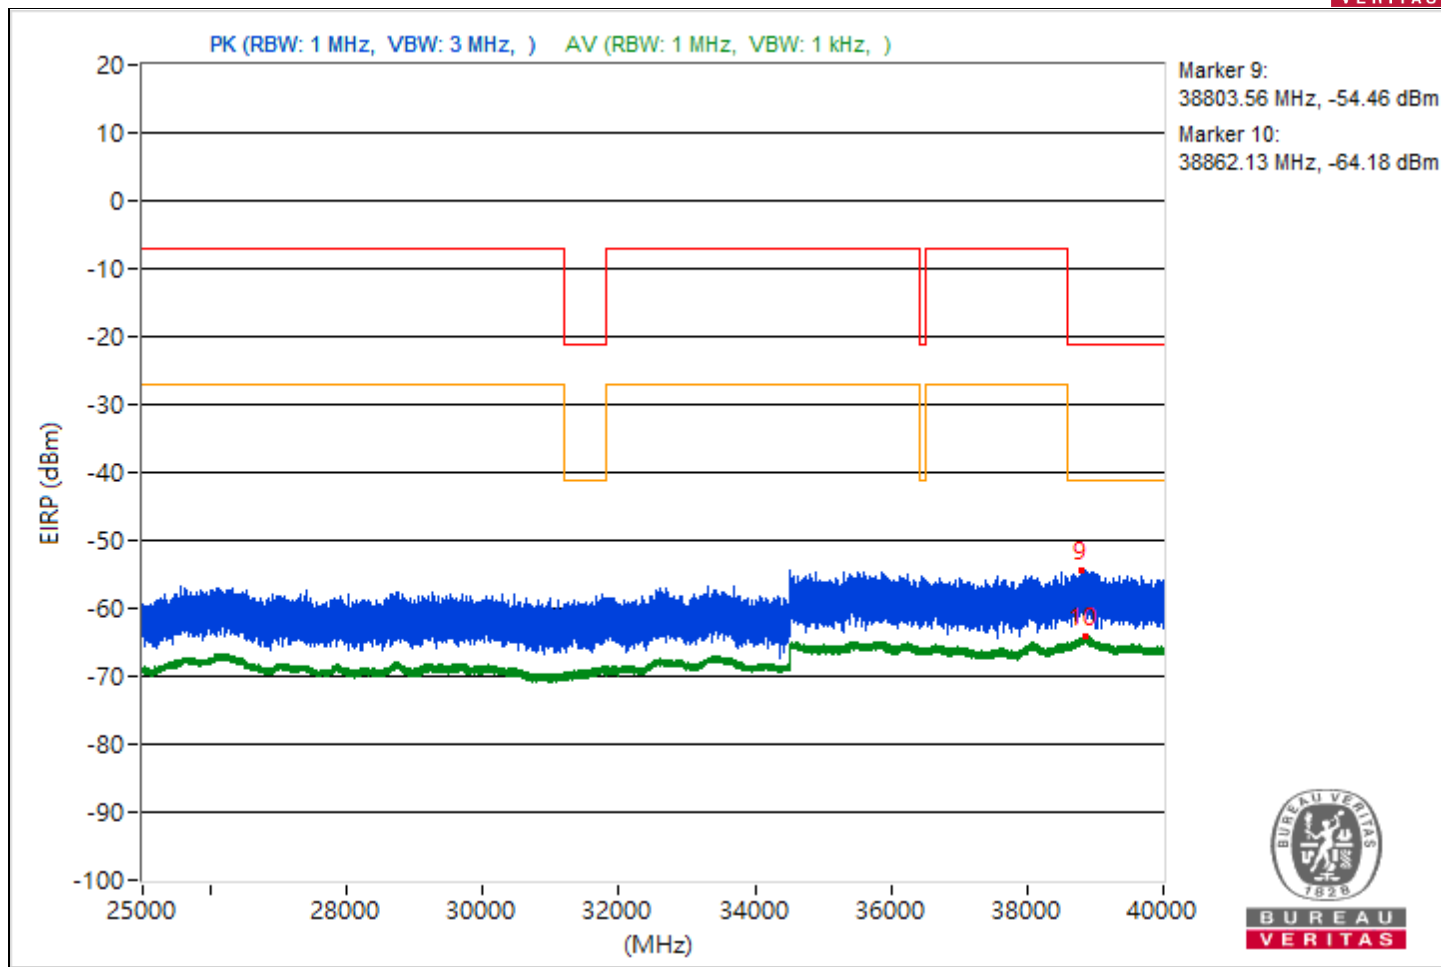





RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5134.28	46.96 PK	74	-27.04	-60.53	-54.12	4.92	-48.3
2	5451.84	36.81 AV	54	-17.19	-66.29	-66.48	4.92	-58.45
3	8246.67	51.5 PK	74	-22.5	-52.69	-50.88	4.92	-43.76
4	8246.67	48.85 AV	54	-5.15	-54.36	-54.31	4.92	-46.41
5	20820	47.54 PK	74	-26.46	-59.94	-53.53	4.92	-47.72
6	21078.5	36.45 AV	54	-17.55	-67.25	-66.28	4.92	-58.81
7	23815	49.29 PK	74	-24.71	-56.66	-52.23	4.92	-45.97
8	23785.3	37.74 AV	54	-16.26	-65	-65.95	4.92	-57.52
9	38815.11	40.44 PK	74	-33.56	-68.36	-60.38	4.92	-54.82
10	38825.51	30.91 AV	54	-23.09	-71.96	-72.62	4.92	-64.35

Note: Margin value = Emission Level - Limit value

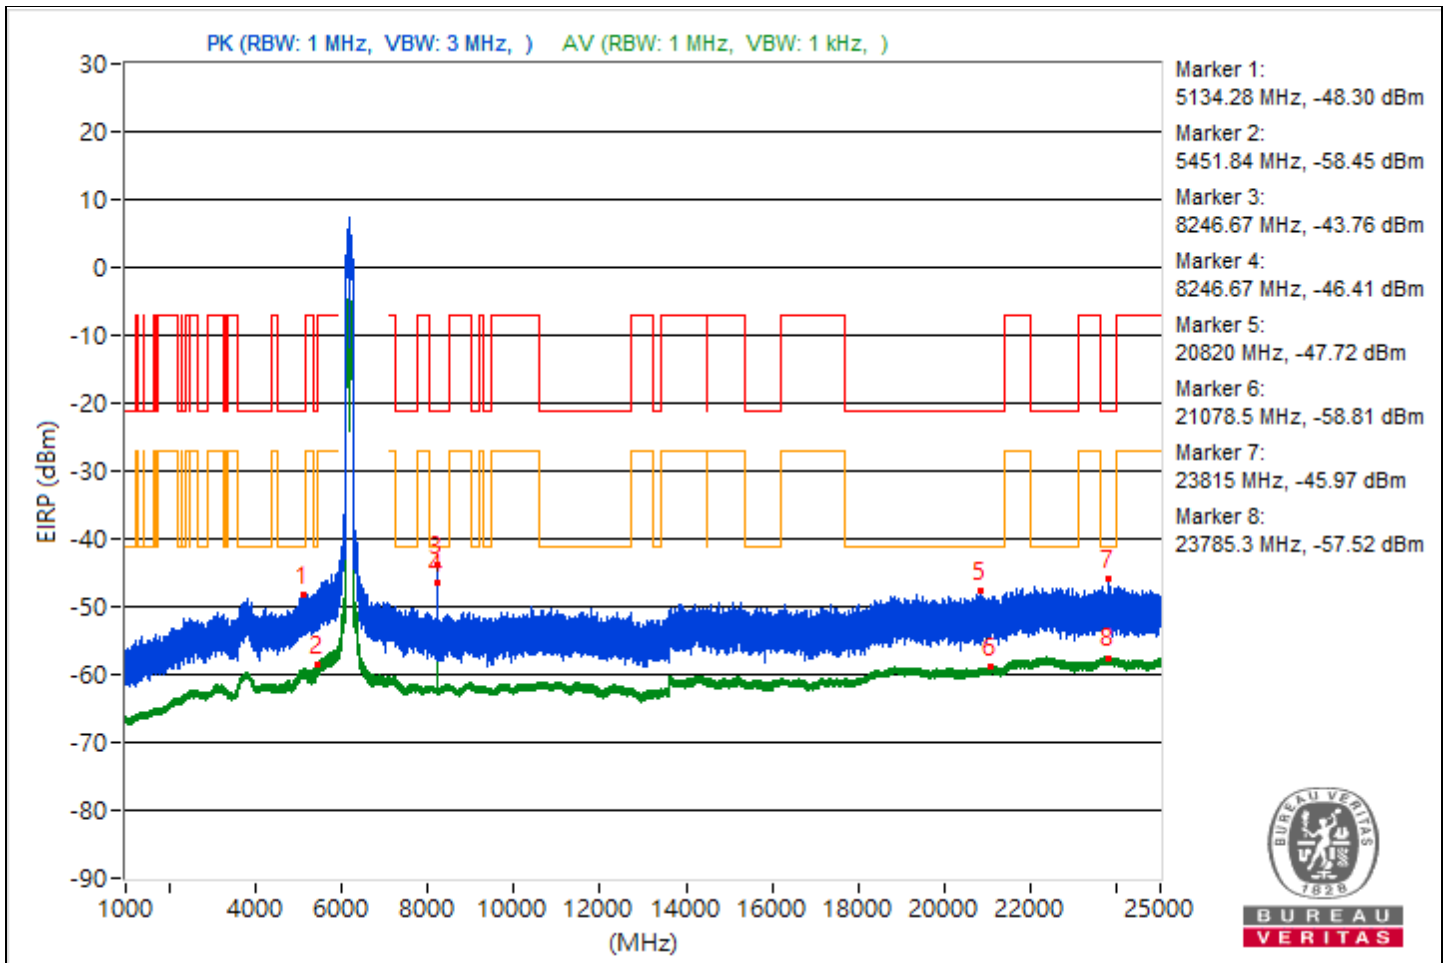

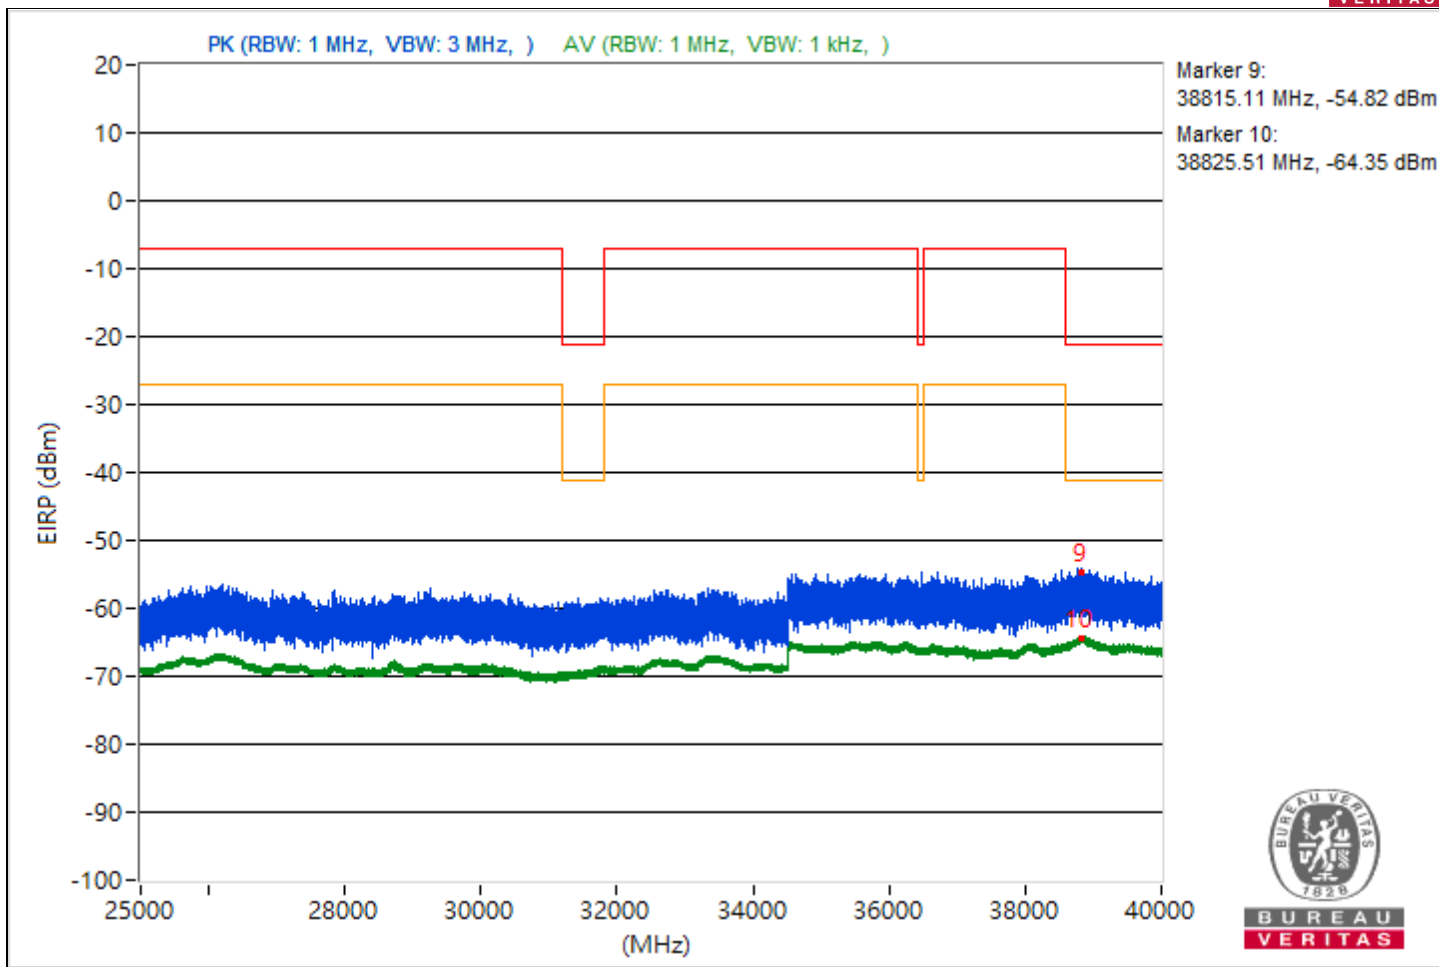





RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5392.73	46.78 PK	74	-27.22	-57.17	-55.76	4.92	-48.48
2	5441.11	36.07 AV	54	-17.93	-66.8	-67.48	4.92	-59.19
3	8460.09	49.39 PK	74	-24.61	-54.04	-53.58	4.92	-45.87
4	8459.91	46.55 AV	54	-7.45	-57.22	-56.13	4.92	-48.71
5	20927.7	47.05 PK	74	-26.95	-54.37	-59.19	4.92	-48.21
6	21164.4	36.46 AV	54	-17.54	-67.17	-66.32	4.92	-58.8
7	22329	48.75 PK	74	-25.25	-57.96	-52.52	4.92	-46.51
8	23608.4	37.7 AV	54	-16.3	-65.94	-65.08	4.92	-57.56
9	38809.78	41.6 PK	74	-32.4	-68.31	-59.07	4.92	-53.66
10	38828.62	31 AV	54	-23	-72.67	-71.76	4.92	-64.26

Note: Margin value = Emission Level - Limit value

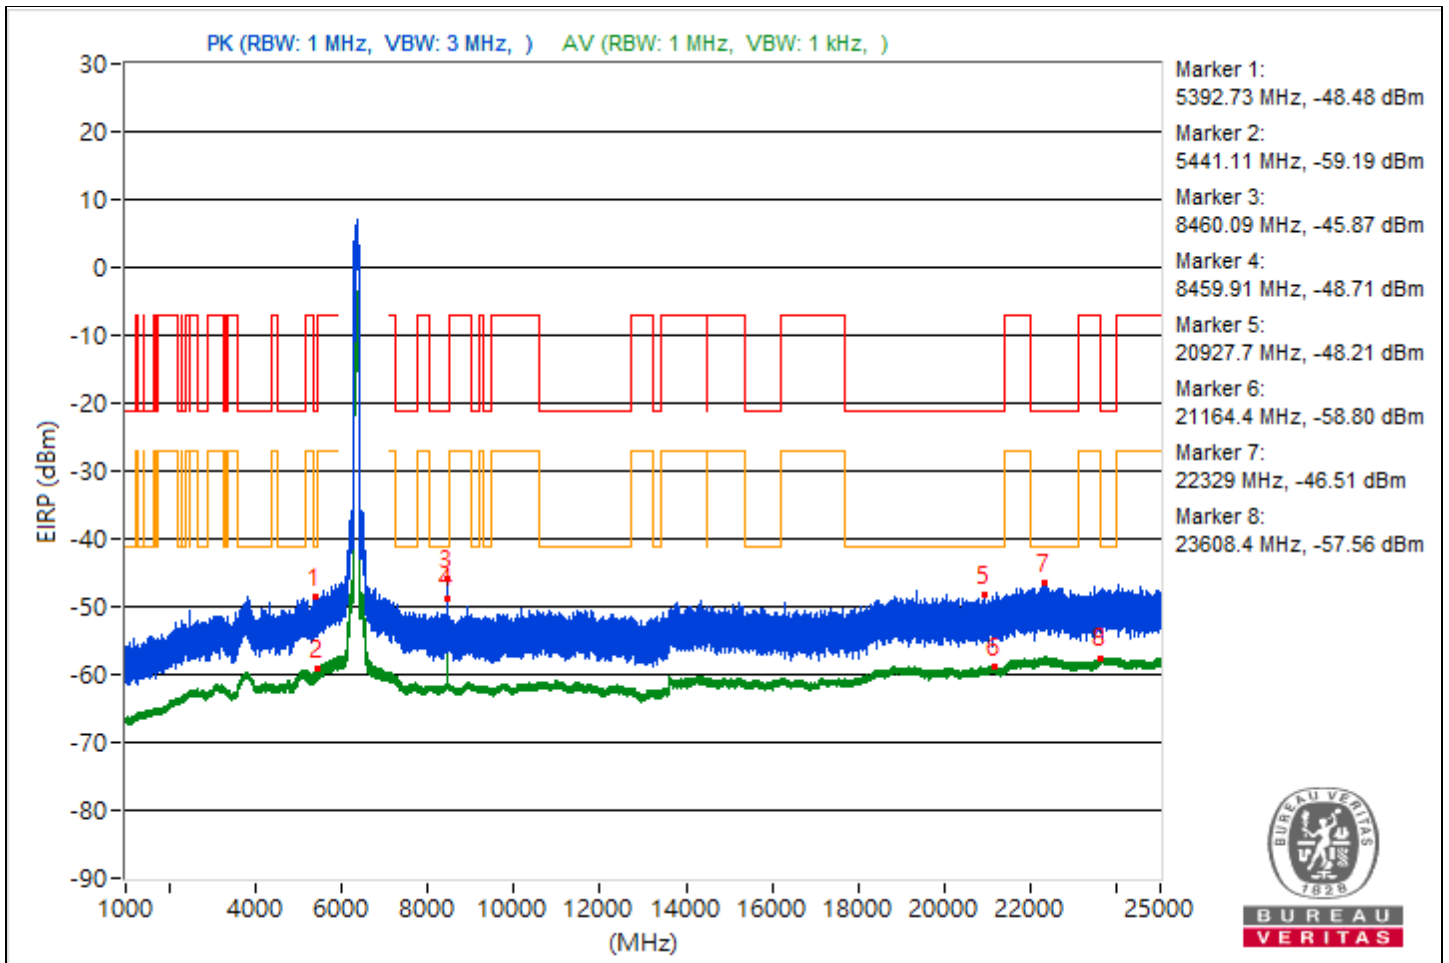

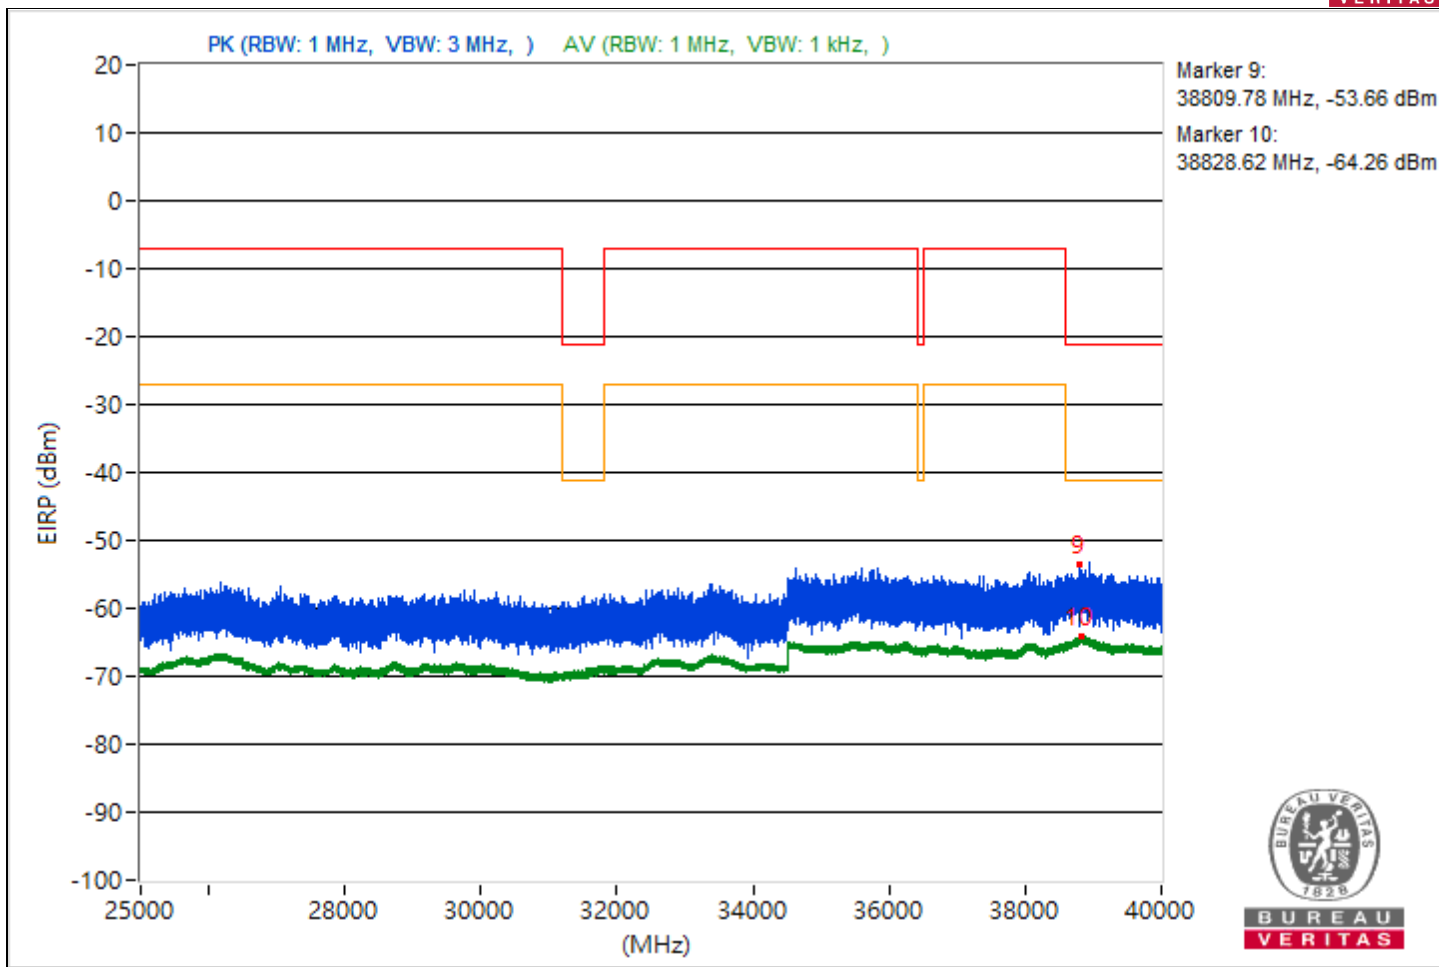





RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.04	46.06 PK	74	-27.94	-59.09	-55.78	4.92	-49.2
2	5111.41	35.61 AV	54	-18.39	-67.98	-67.22	4.92	-59.65
3	14499.02	45.28 PK	74	-28.72	-62.46	-55.74	4.92	-49.98
4	7252.48	35.12 AV	54	-18.88	-68.58	-67.62	4.92	-60.14
5	21112.8	47.7 PK	74	-26.3	-59.43	-53.46	4.92	-47.56
6	18868.3	36.27 AV	54	-17.73	-66.54	-67.34	4.92	-58.99
7	22714.9	48.43 PK	74	-25.57	-53.34	-56.89	4.92	-46.83
8	23676.1	37.71 AV	54	-16.29	-65.12	-65.87	4.92	-57.55
9	38773.16	41.68 PK	74	-32.32	-66.6	-59.23	4.92	-53.58
10	38847.47	31.11 AV	54	-22.89	-72.49	-71.71	4.92	-64.15

Note: Margin value = Emission Level - Limit value

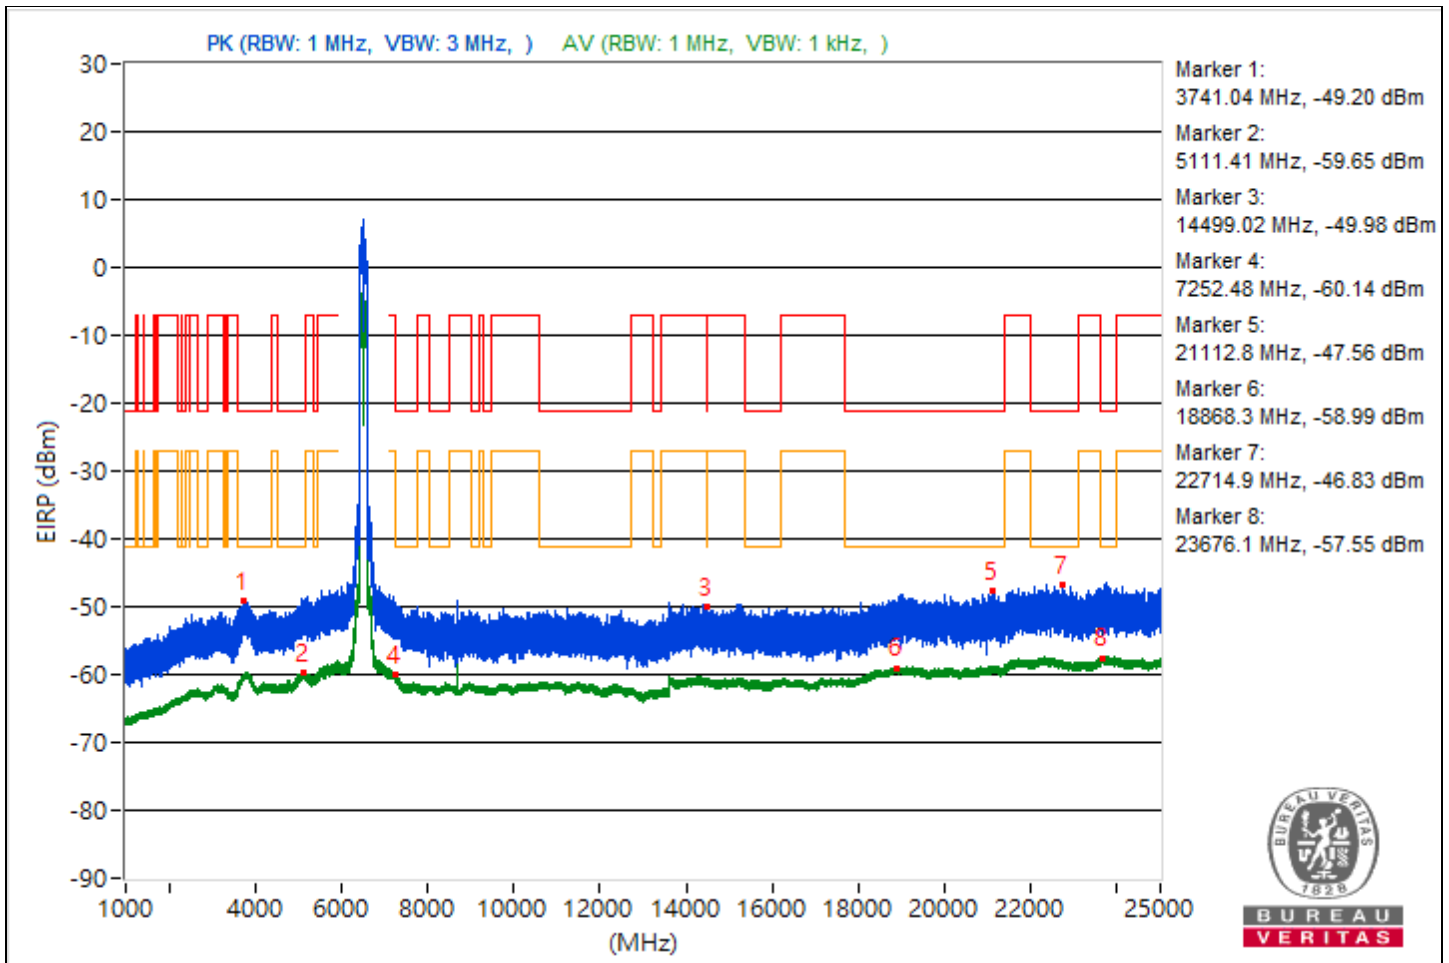

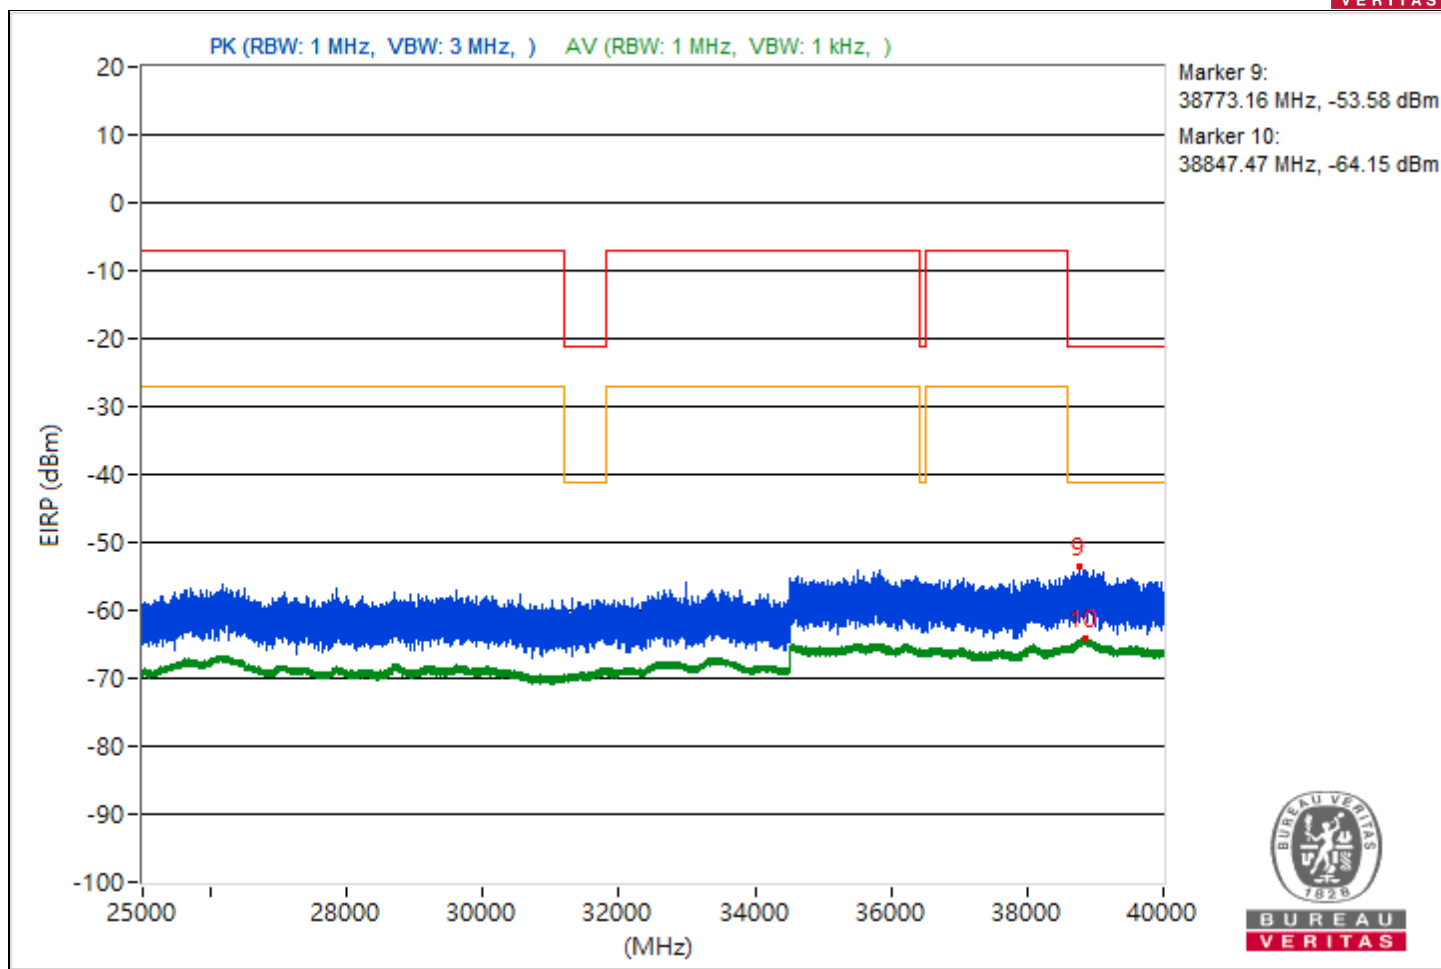





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5145.17	46.42 PK	74	-27.58	-59.91	-54.97	4.92	-48.84
2	3774.33	35.7 AV	54	-18.3	-67.3	-67.68	4.92	-59.56
3	7280.48	45.8 PK	74	-28.2	-55.91	-59.63	4.92	-49.46
4	7252.63	35.55 AV	54	-18.45	-67.96	-67.34	4.92	-59.71
5	20702.7	47.73 PK	74	-26.27	-53.12	-60.87	4.92	-47.53
6	21114.5	36.46 AV	54	-17.54	-66.53	-66.95	4.92	-58.8
7	22327.2	48.87 PK	74	-25.13	-52.6	-57.21	4.92	-46.39
8	22317.7	37.79 AV	54	-16.21	-65.92	-64.93	4.92	-57.47
9	38861.6	41.74 PK	74	-32.26	-64.43	-59.7	4.92	-53.52
10	38816.53	31.12 AV	54	-22.88	-71.98	-72.16	4.92	-64.14

Note: Margin value = Emission Level - Limit value

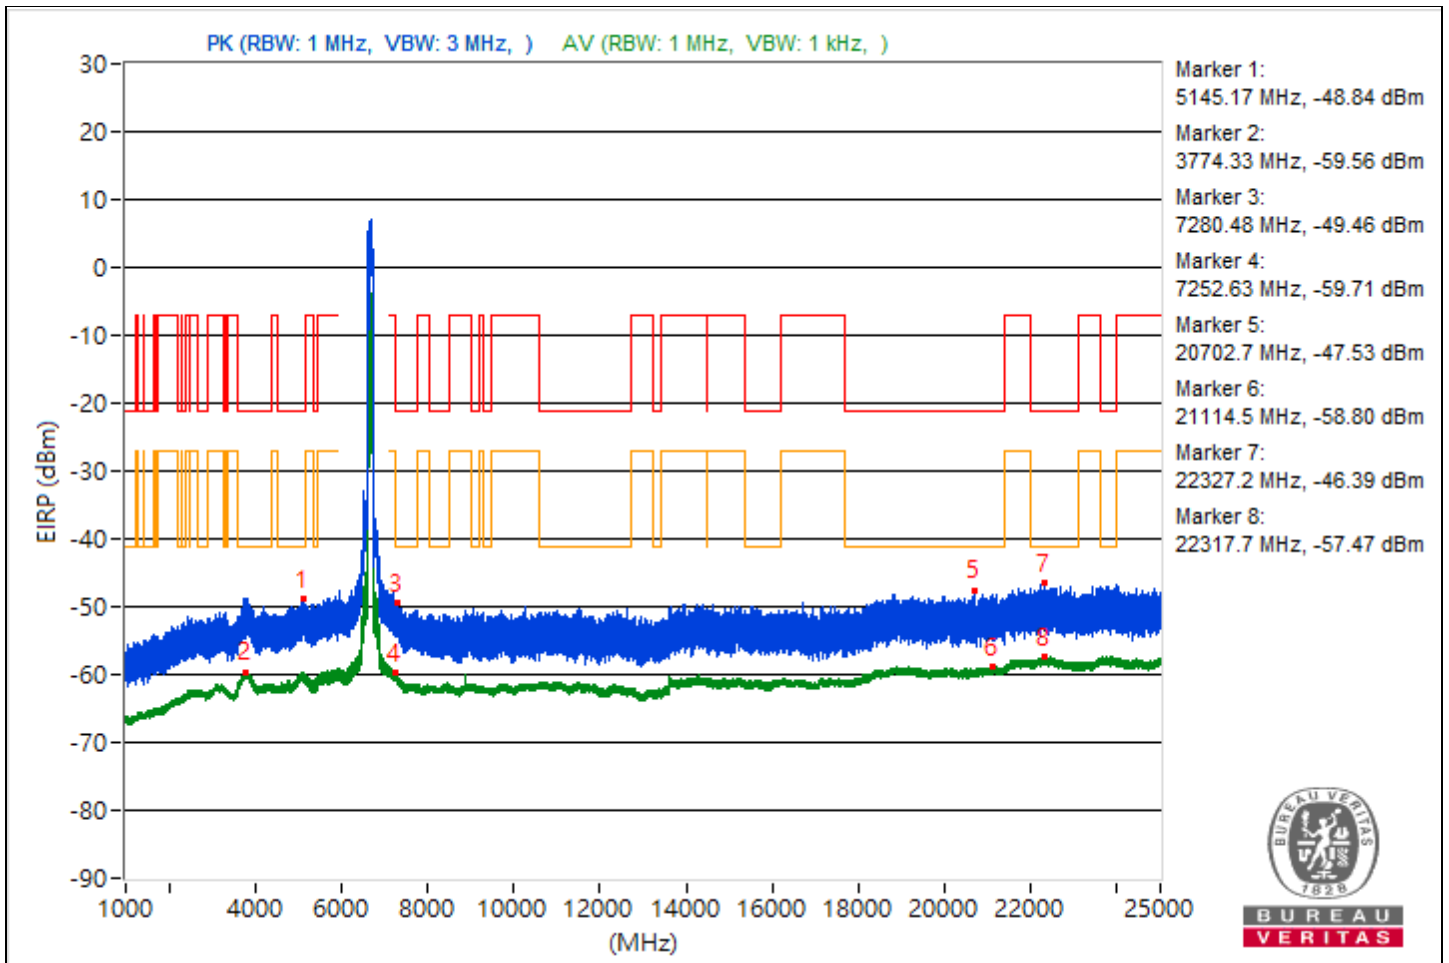

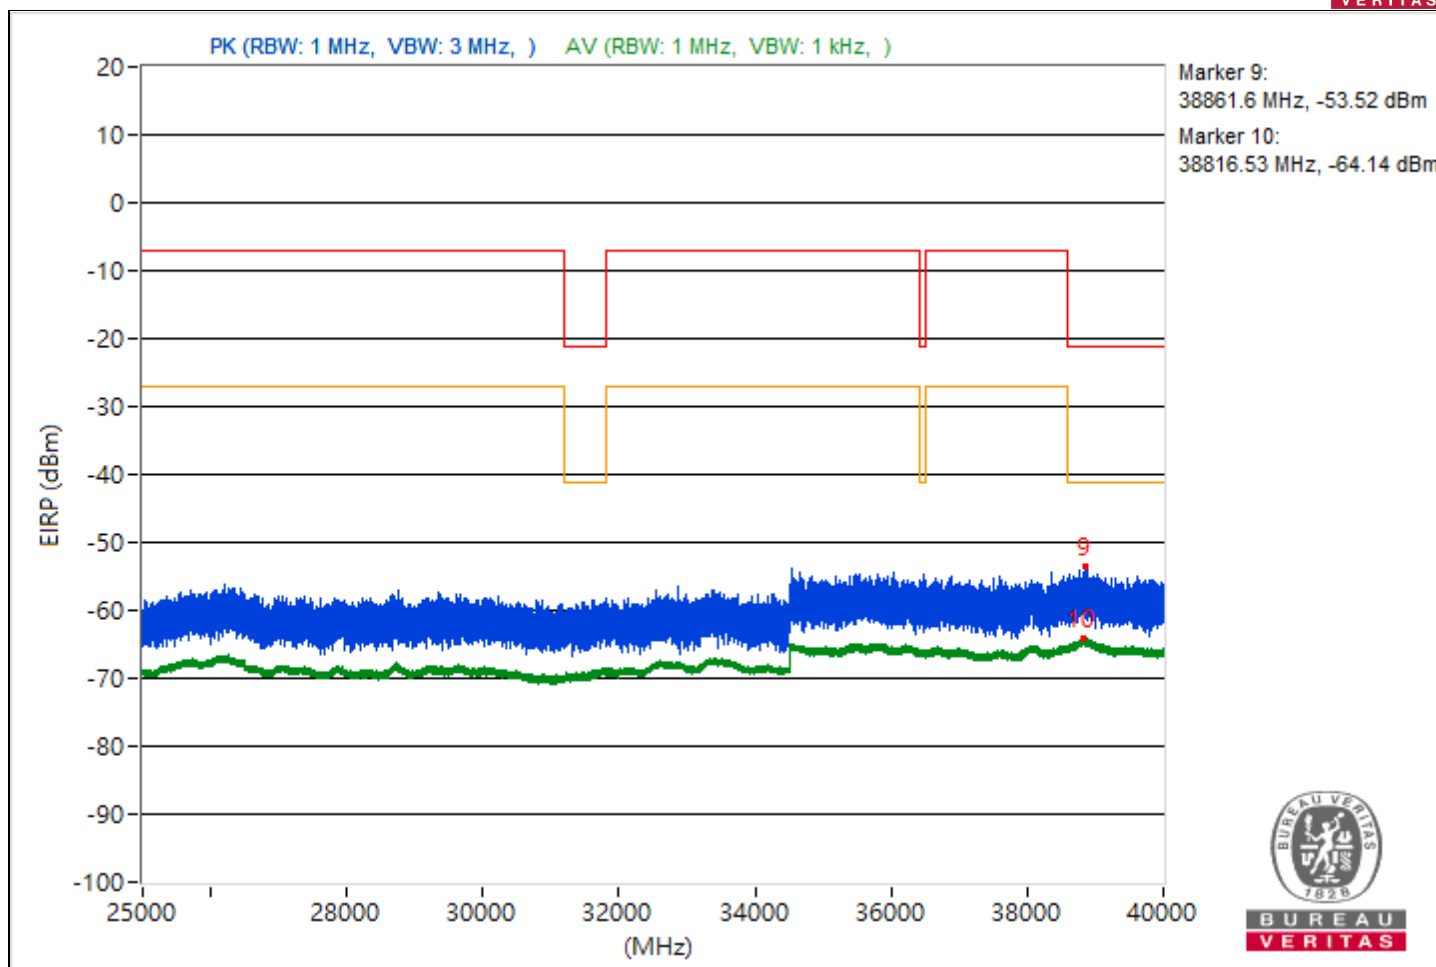





RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3880.11	45.7 PK	74	-28.3	-56.01	-59.75	4.92	-49.56
2	3812.29	35.62 AV	54	-18.38	-67.44	-67.7	4.92	-59.64
3	7262.28	46.99 PK	74	-27.01	-57.53	-55.18	4.92	-48.27
4	7256.13	36.4 AV	54	-17.6	-66.37	-67.25	4.92	-58.86
5	19388.1	47.31 PK	74	-26.69	-53.89	-59.65	4.92	-47.95
6	21150.6	36.41 AV	54	-17.59	-67.33	-66.29	4.92	-58.85
7	23607.1	48.84 PK	74	-25.16	-56.22	-53.05	4.92	-46.42
8	23702.5	37.77 AV	54	-16.23	-65.09	-65.77	4.92	-57.49
9	38806.04	40.38 PK	74	-33.62	-67.19	-60.67	4.92	-54.88
10	38811.64	31.2 AV	54	-22.8	-72.35	-71.65	4.92	-64.06

Note: Margin value = Emission Level - Limit value

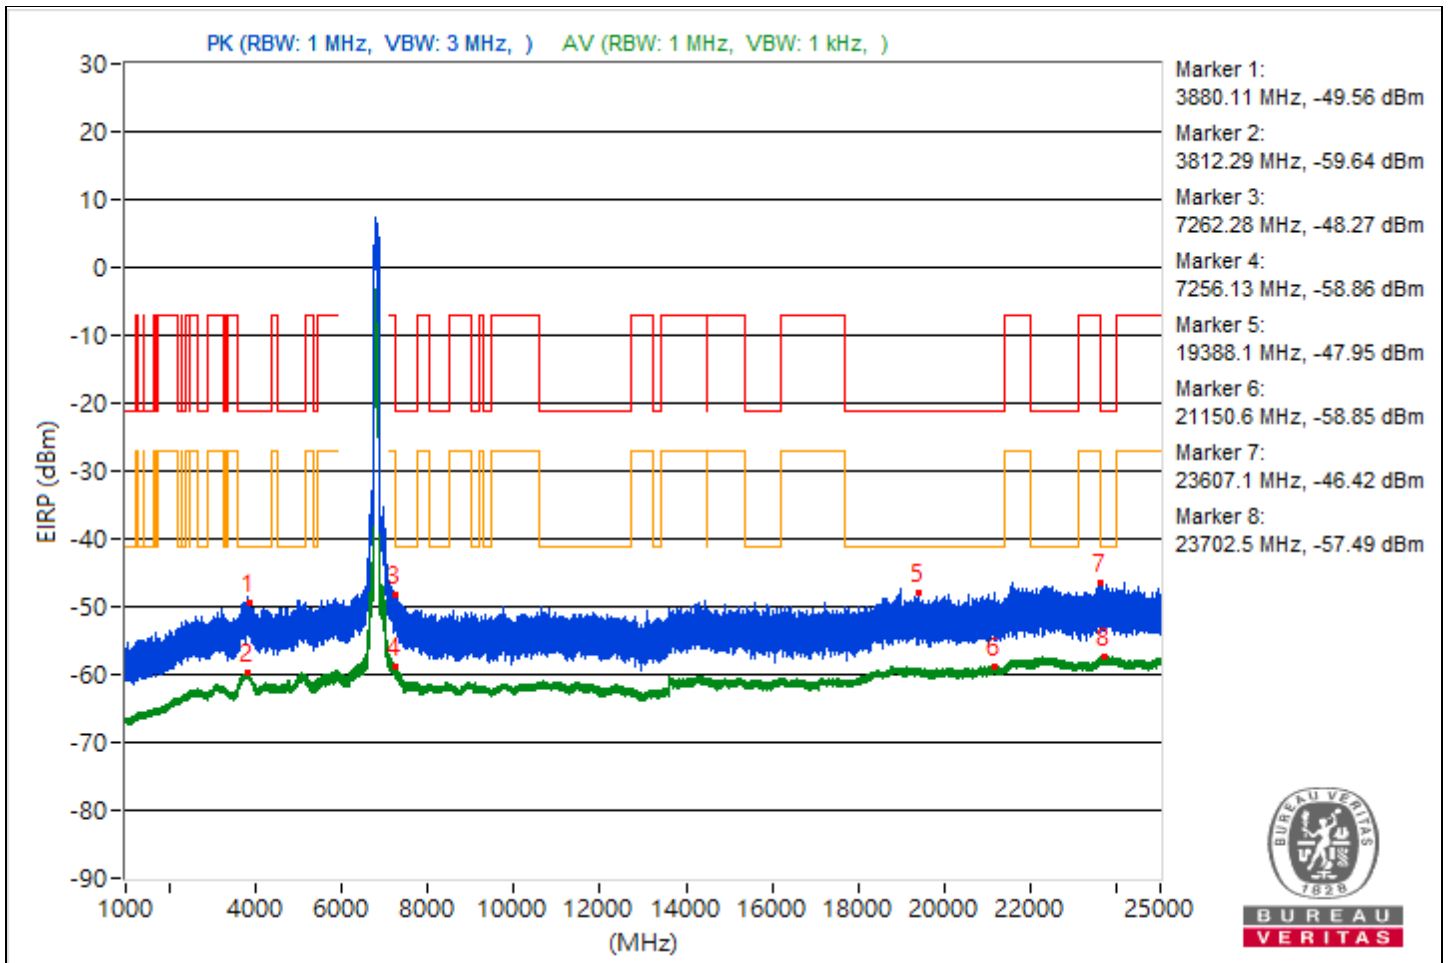

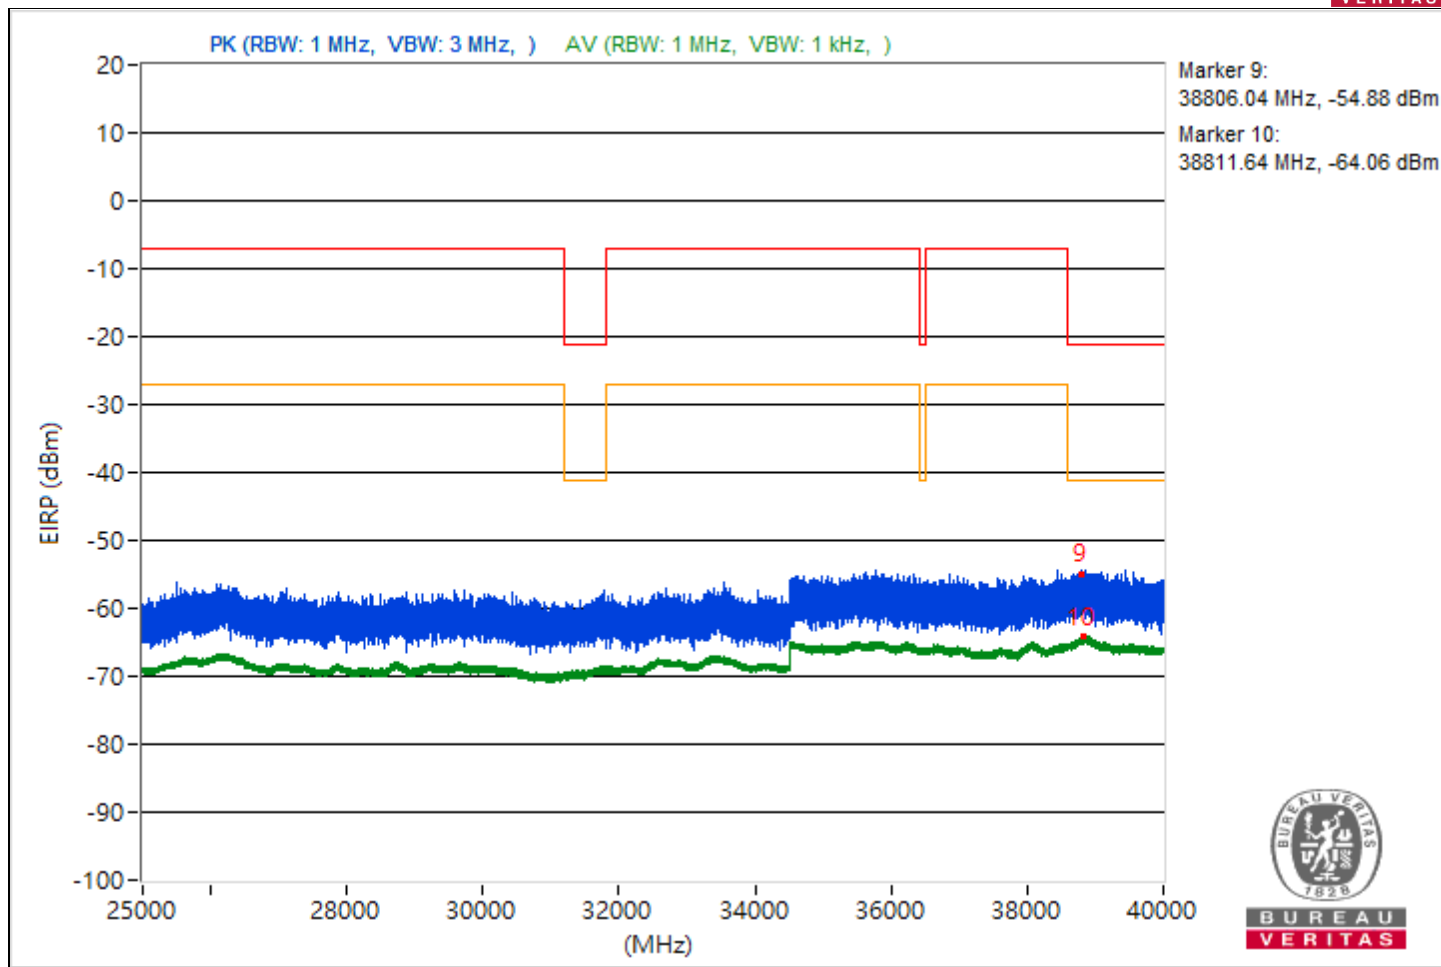





RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3751.23	47.31 PK	74	-26.69	-54.64	-57.61	4.92	-47.95
2	3804.59	35.61 AV	54	-18.39	-67.97	-67.22	4.92	-59.65
3	7254.66	48.72 PK	74	-25.28	-54.15	-54.81	4.92	-46.54
4	7250.46	37.94 AV	54	-16.06	-65.73	-64.82	4.92	-57.32
5	20818.1	47.62 PK	74	-26.38	-58.22	-53.93	4.92	-47.64
6	21108.5	36.45 AV	54	-17.55	-66.44	-67.07	4.92	-58.81
7	22076.5	48.18 PK	74	-25.82	-53.14	-58.38	4.92	-47.08
8	23656.6	37.87 AV	54	-16.13	-64.97	-65.7	4.92	-57.39
9	38779.38	39.78 PK	74	-34.22	-68.89	-61.06	4.92	-55.48
10	38787.64	31.09 AV	54	-22.91	-72.59	-71.66	4.92	-64.17

Note: Margin value = Emission Level - Limit value

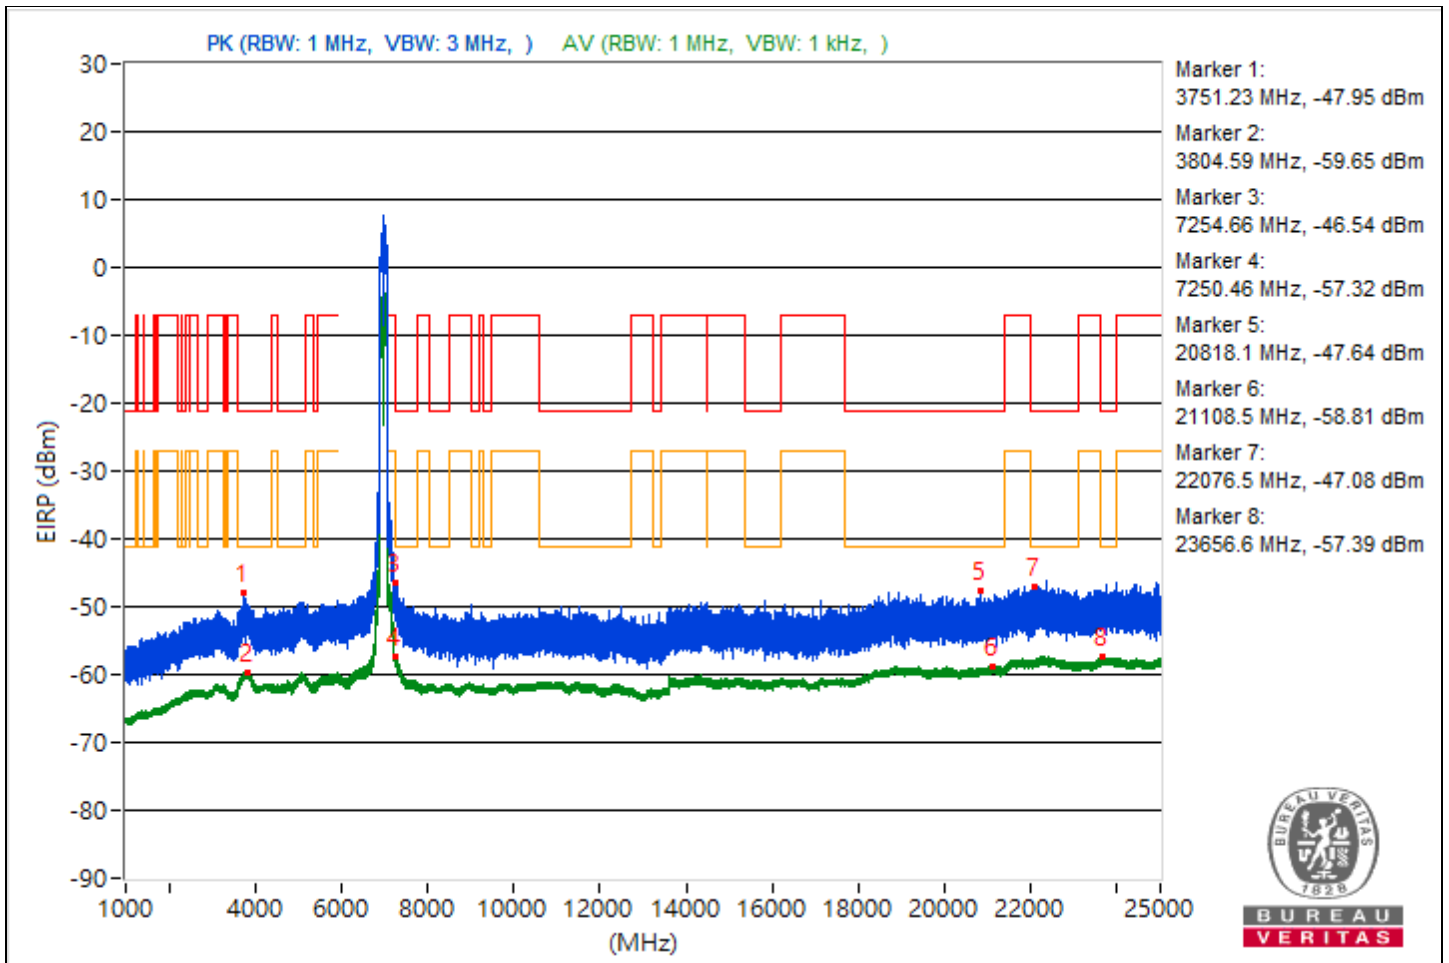

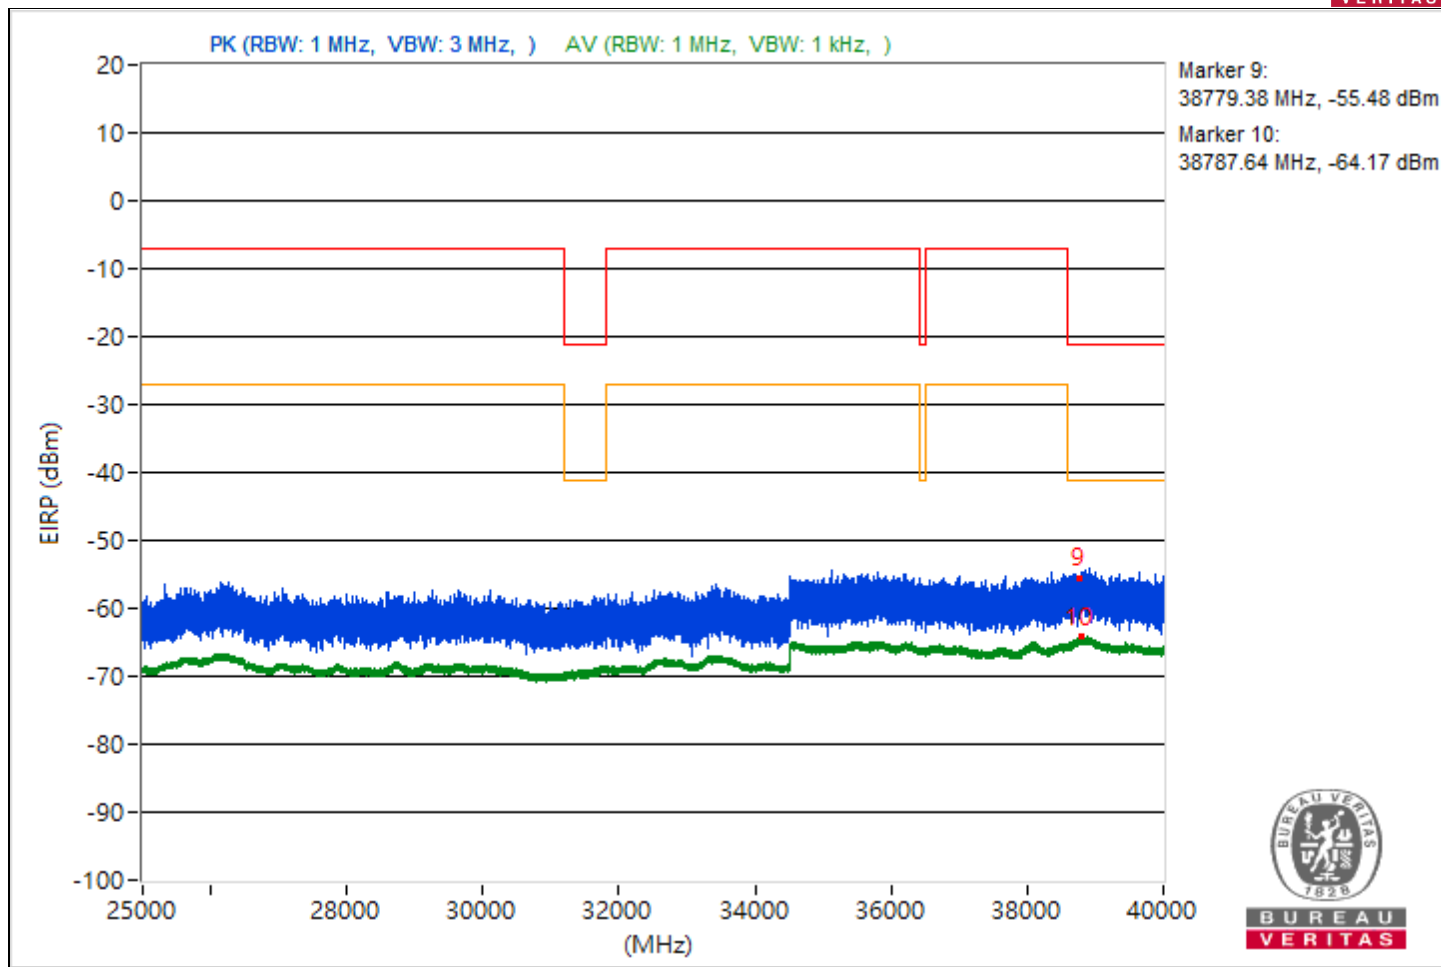





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3821.39	46.24 PK	74	-27.76	-56.07	-58.06	4.92	-49.02
2	3836.17	35.75 AV	54	-18.25	-67.07	-67.84	4.92	-59.51
3	11373.69	44.76 PK	74	-29.24	-56.64	-61.51	4.92	-50.5
4	14497.87	34.66 AV	54	-19.34	-67.95	-69.19	4.92	-60.6
5	19318.3	46.81 PK	74	-27.19	-54.43	-60.04	4.92	-48.45
6	21160.6	36.54 AV	54	-17.46	-66.15	-67.22	4.92	-58.72
7	22422.2	48.13 PK	74	-25.87	-58.21	-53.25	4.92	-47.13
8	23819.9	38.57 AV	54	-15.43	-63.99	-65.35	4.92	-56.69
9	38996.27	41.6 PK	74	-32.4	-67.79	-59.14	4.92	-53.66
10	38806.76	30.91 AV	54	-23.09	-73.07	-71.62	4.92	-64.35

Note: Margin value = Emission Level - Limit value

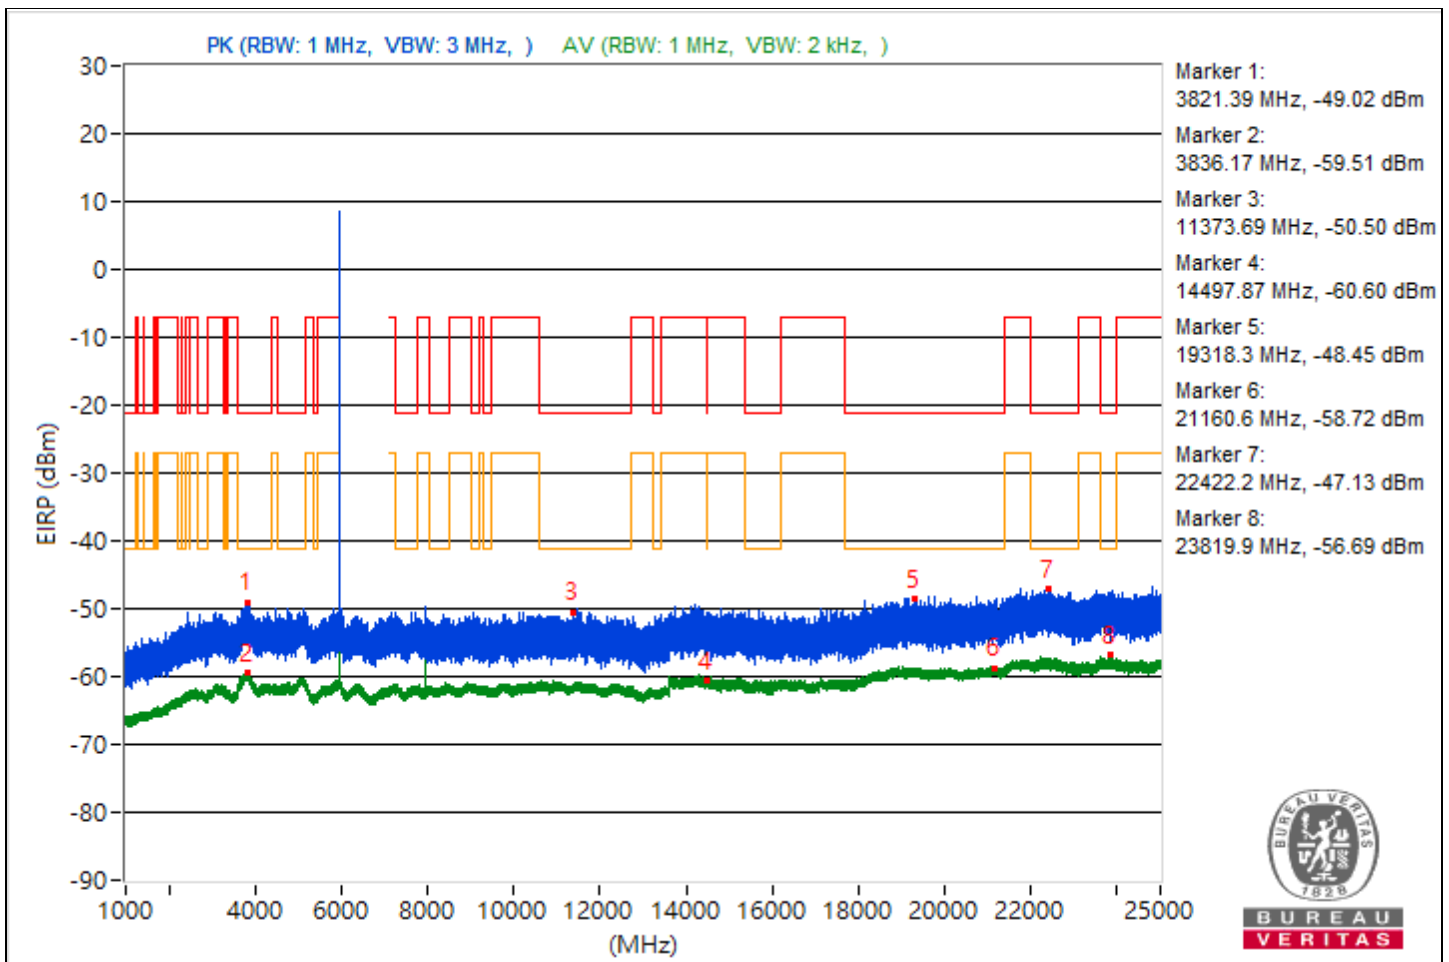

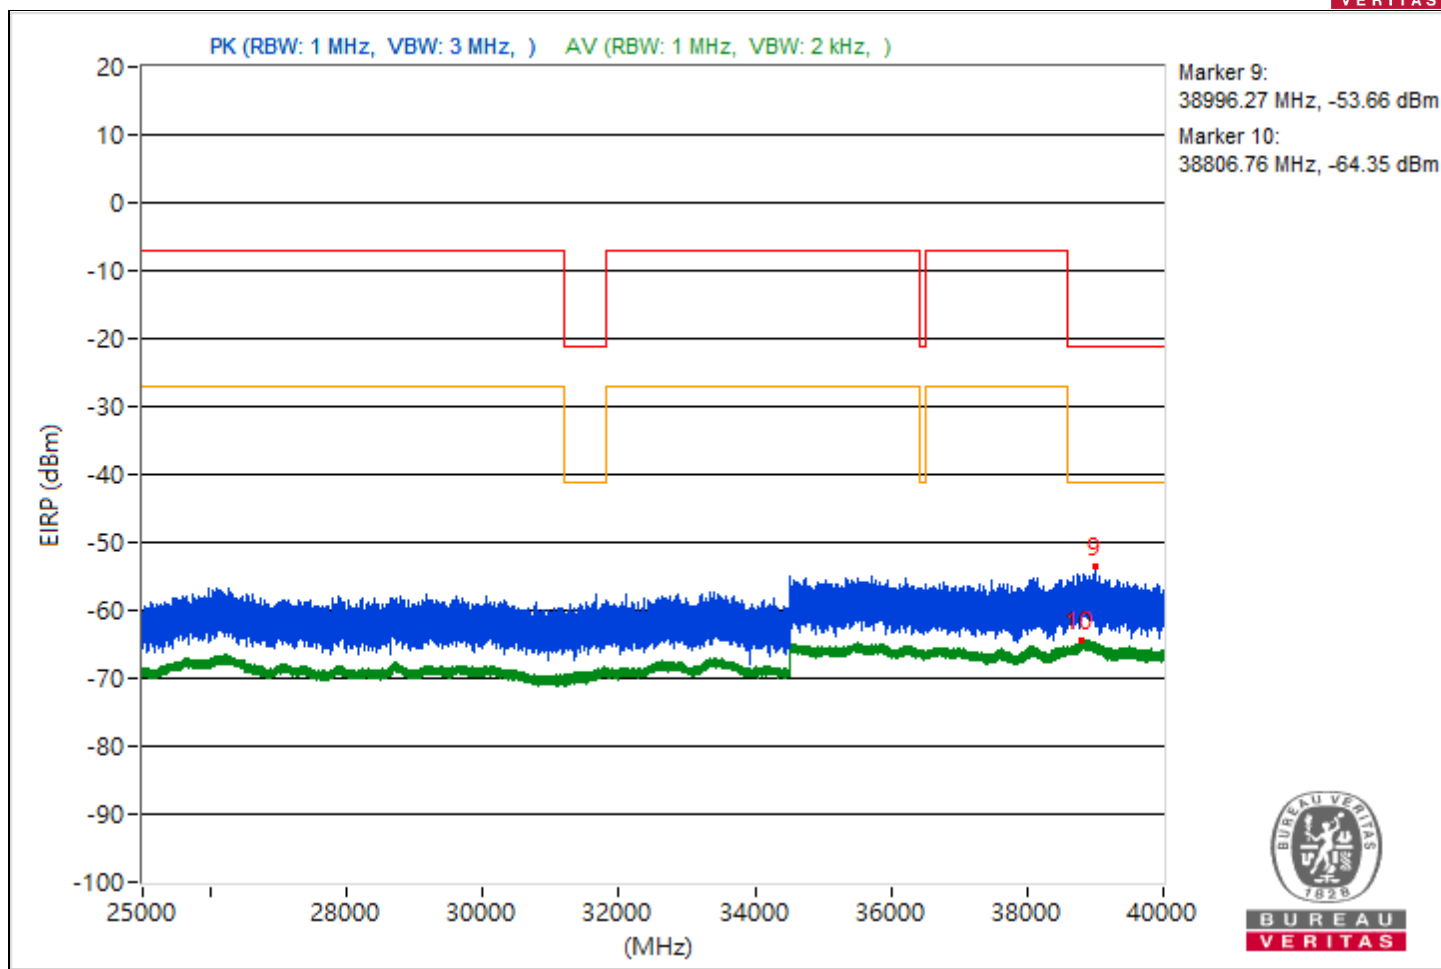





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3827.14	47.05 PK	74	-26.95	-54.4	-59.11	4.92	-48.21
2	3844.8	35.75 AV	54	-18.25	-67.04	-67.87	4.92	-59.51
3	12135.47	44.22 PK	74	-29.78	-63.37	-56.84	4.92	-51.04
4	14499.2	34.9 AV	54	-19.1	-68.79	-67.85	4.92	-60.36
5	19042.5	46.66 PK	74	-27.34	-55.05	-58.8	4.92	-48.6
6	21161.5	36.53 AV	54	-17.47	-67.3	-66.1	4.92	-58.73
7	22507.5	48.1 PK	74	-25.9	-59.6	-52.93	4.92	-47.16
8	23780.2	37.99 AV	54	-16.01	-64.88	-65.55	4.92	-57.27
9	38686.13	40.19 PK	74	-33.81	-68.22	-60.7	4.92	-55.07
10	38839.38	31.1 AV	54	-22.9	-72	-72.19	4.92	-64.16

Note: Margin value = Emission Level - Limit value

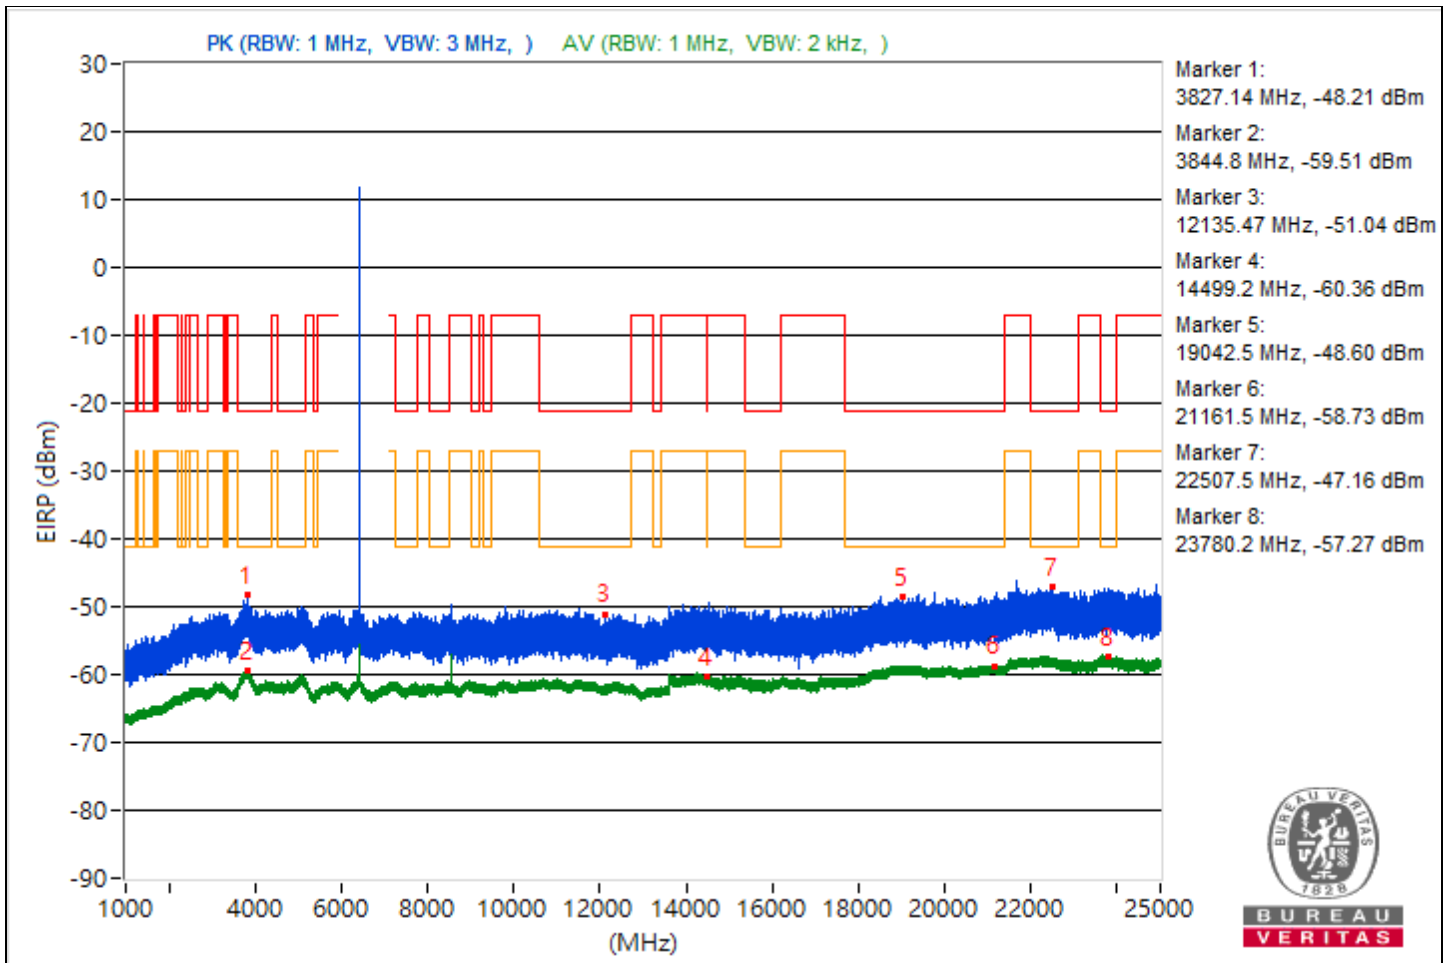

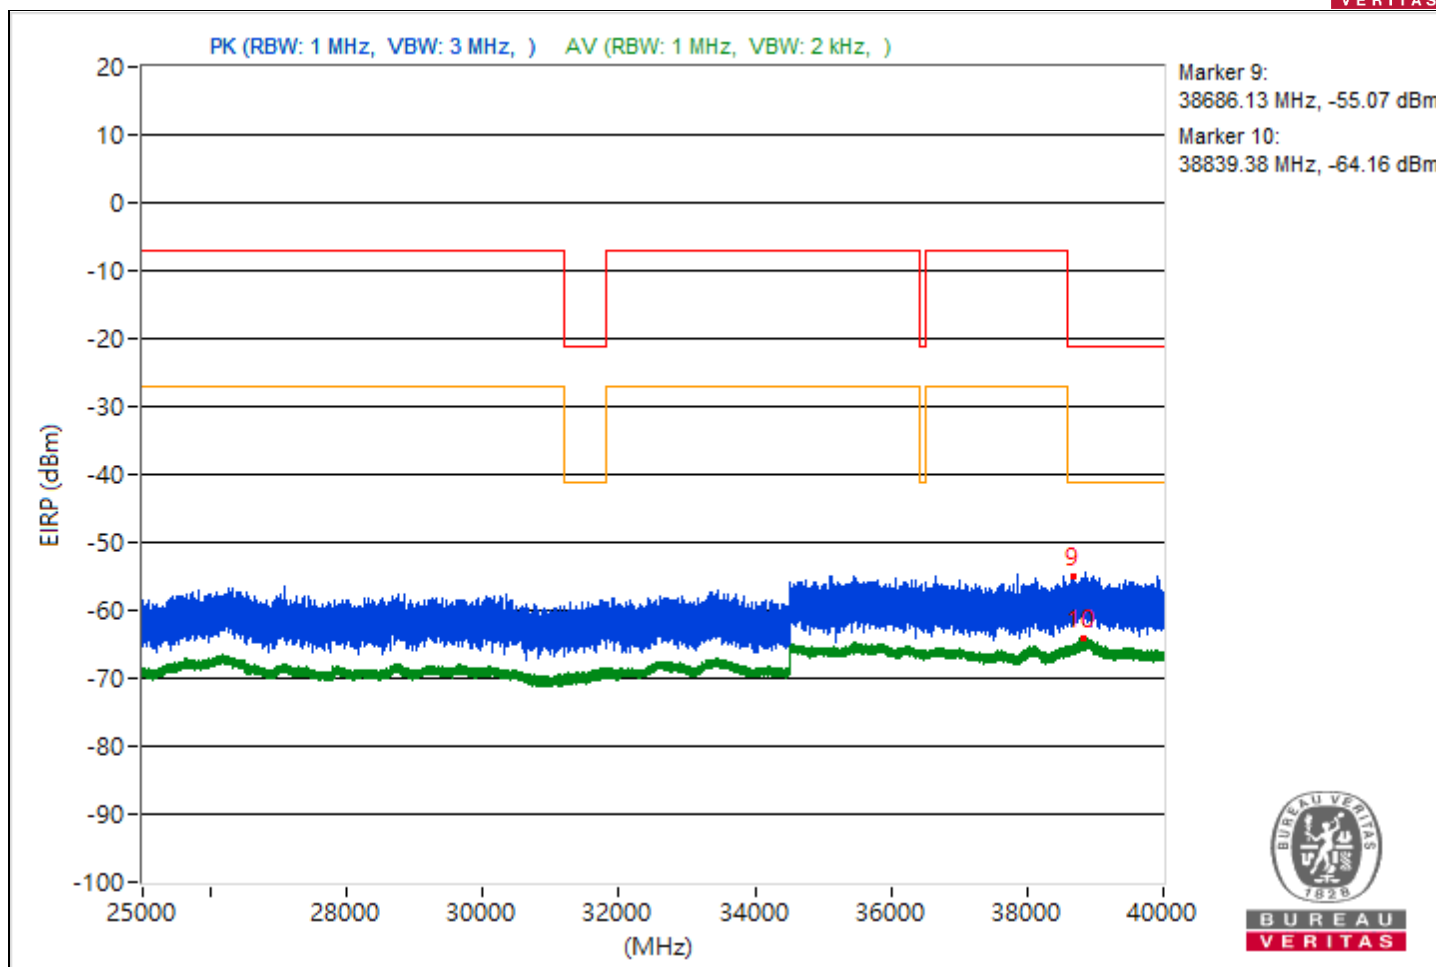





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.64	46.4 PK	74	-27.6	-56.13	-57.57	4.92	-48.86
2	3785.61	35.87 AV	54	-18.13	-68.04	-66.71	4.92	-59.39
3	15702.84	44.99 PK	74	-29.01	-56.65	-60.64	4.92	-50.27
4	10755.38	34.58 AV	54	-19.42	-69.68	-67.76	4.92	-60.68
5	19099.4	46.38 PK	74	-27.62	-61.43	-54.62	4.92	-48.88
6	21176.7	36.81 AV	54	-17.19	-66.69	-66.08	4.92	-58.45
7	23695.3	48.55 PK	74	-25.45	-57.19	-53.05	4.92	-46.71
8	23827.4	37.86 AV	54	-16.14	-66.17	-64.63	4.92	-57.4
9	38890.93	40.7 PK	74	-33.3	-65.48	-60.74	4.92	-54.56
10	38827.73	30.92 AV	54	-23.08	-71.95	-72.61	4.92	-64.34

Note: Margin value = Emission Level - Limit value

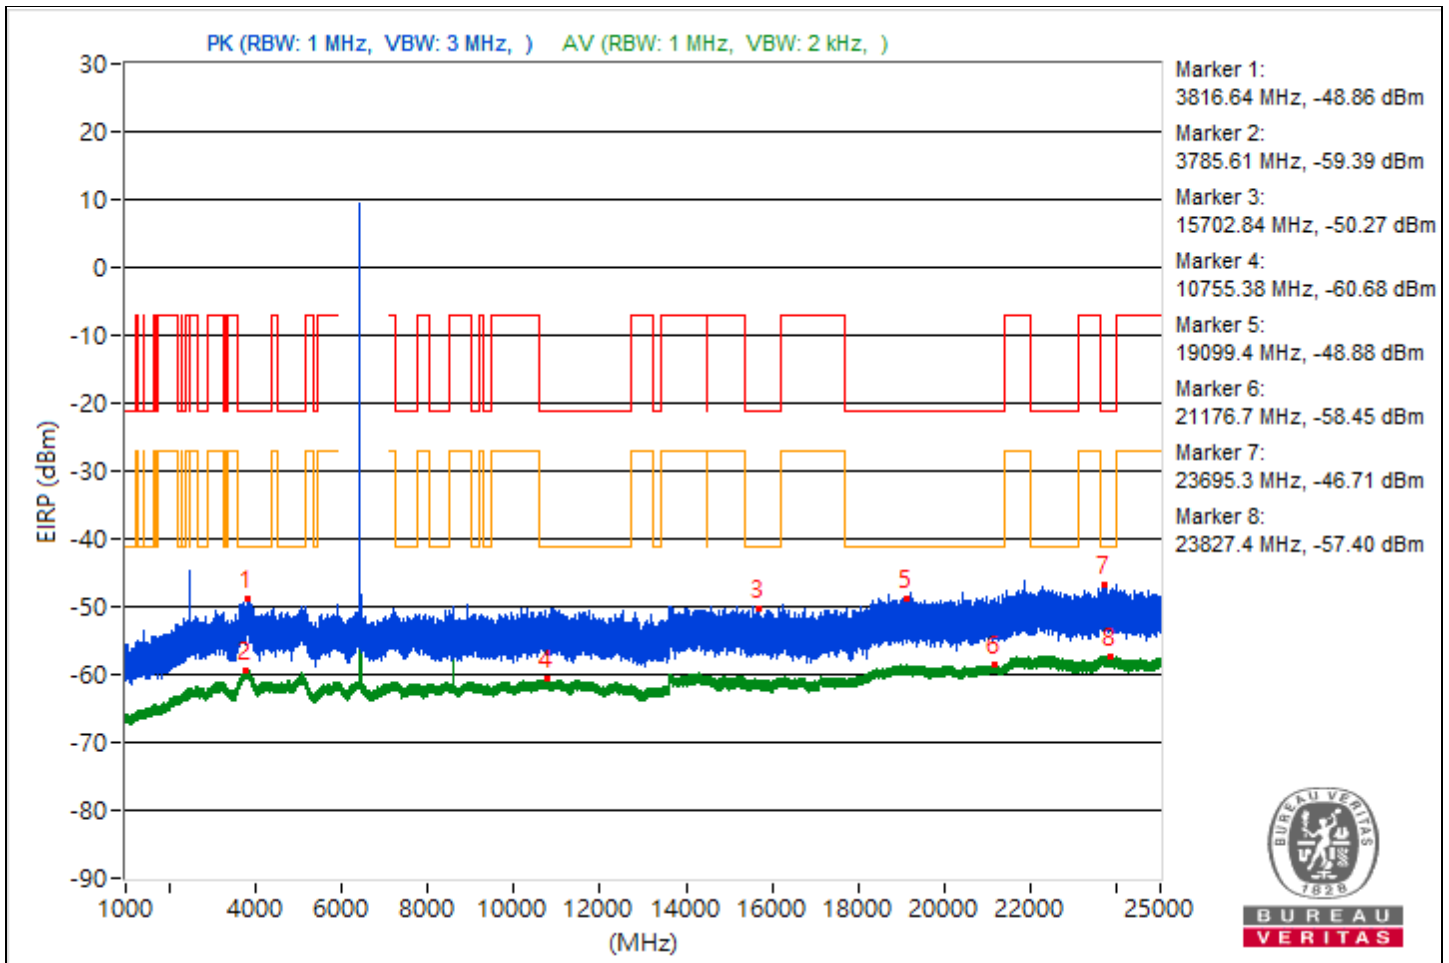

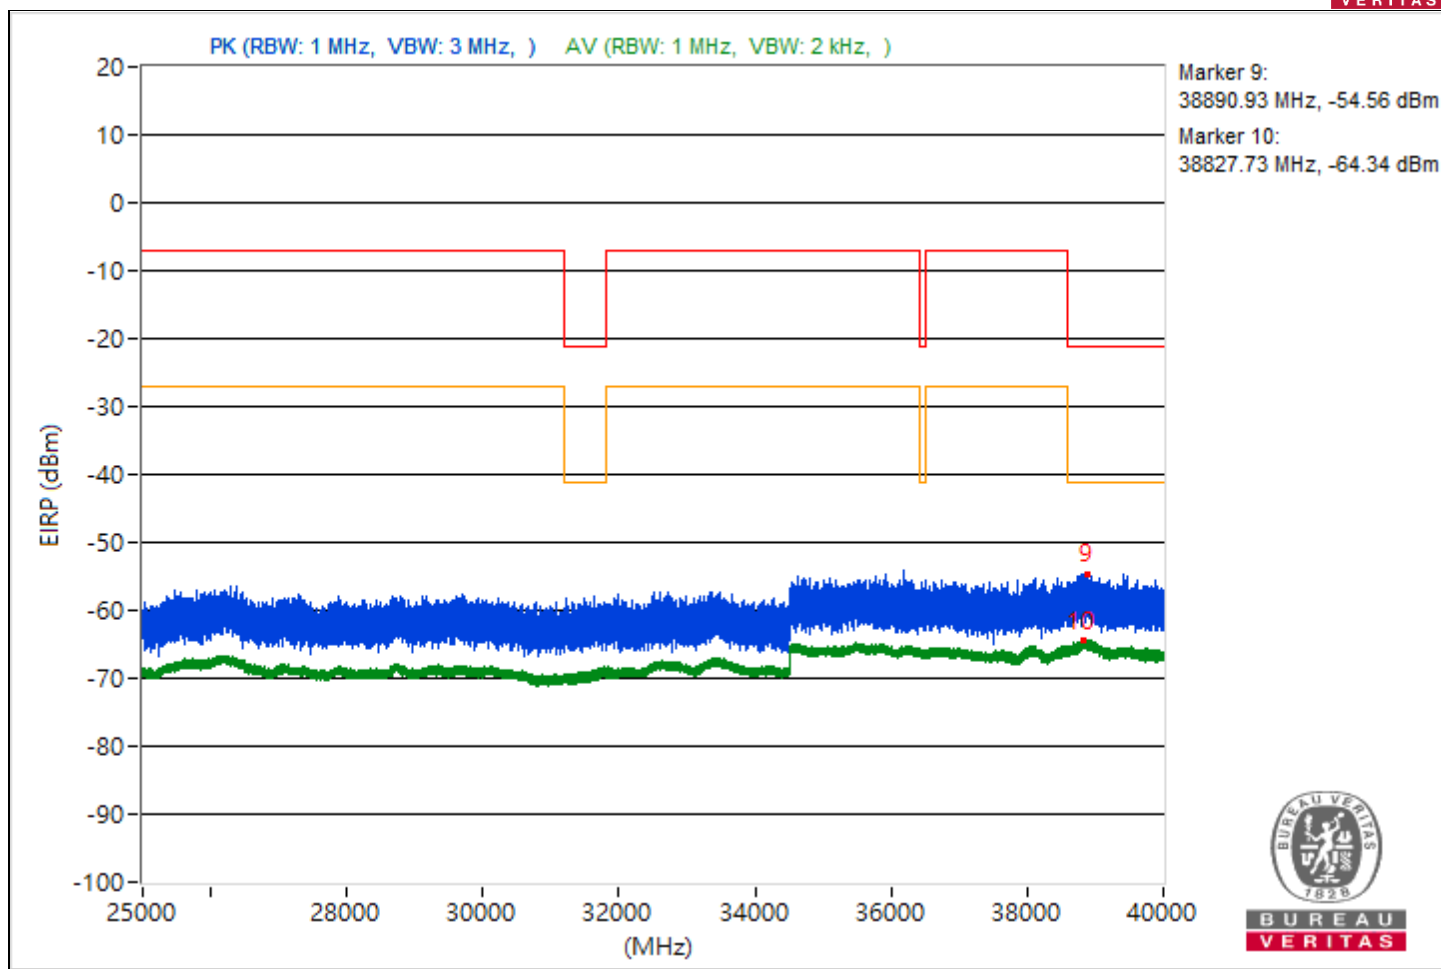





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3793.47	45.83 PK	74	-28.17	-60.36	-55.6	4.92	-49.43
2	3796.27	35.74 AV	54	-18.26	-67.17	-67.74	4.92	-59.52
3	10749.96	45.61 PK	74	-28.39	-61.13	-55.65	4.92	-49.65
4	14492.27	34.76 AV	54	-19.24	-67.84	-69.11	4.92	-60.5
5	18967.2	46.96 PK	74	-27.04	-54.26	-59.94	4.92	-48.3
6	21159.2	36.73 AV	54	-17.27	-67.09	-65.91	4.92	-58.53
7	23905.9	48.07 PK	74	-25.93	-58	-53.4	4.92	-47.19
8	23822.9	37.93 AV	54	-16.07	-65.81	-64.77	4.92	-57.33
9	38870.13	41.46 PK	74	-32.54	-60.03	-64.56	4.92	-53.8
10	38812.27	30.91 AV	54	-23.09	-71.89	-72.71	4.92	-64.35

Note: Margin value = Emission Level - Limit value

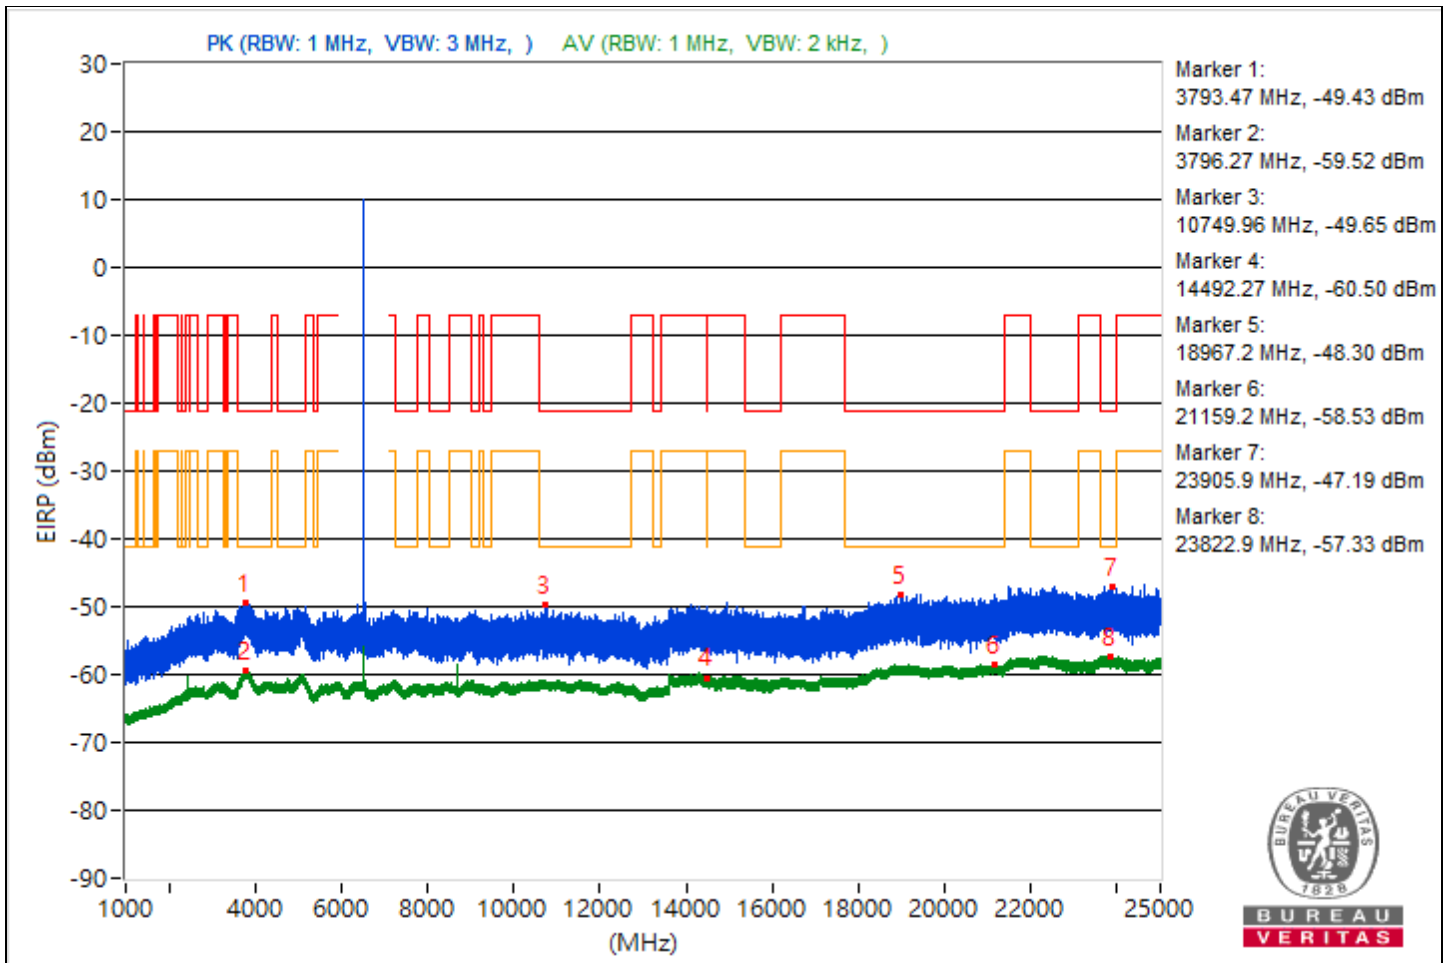

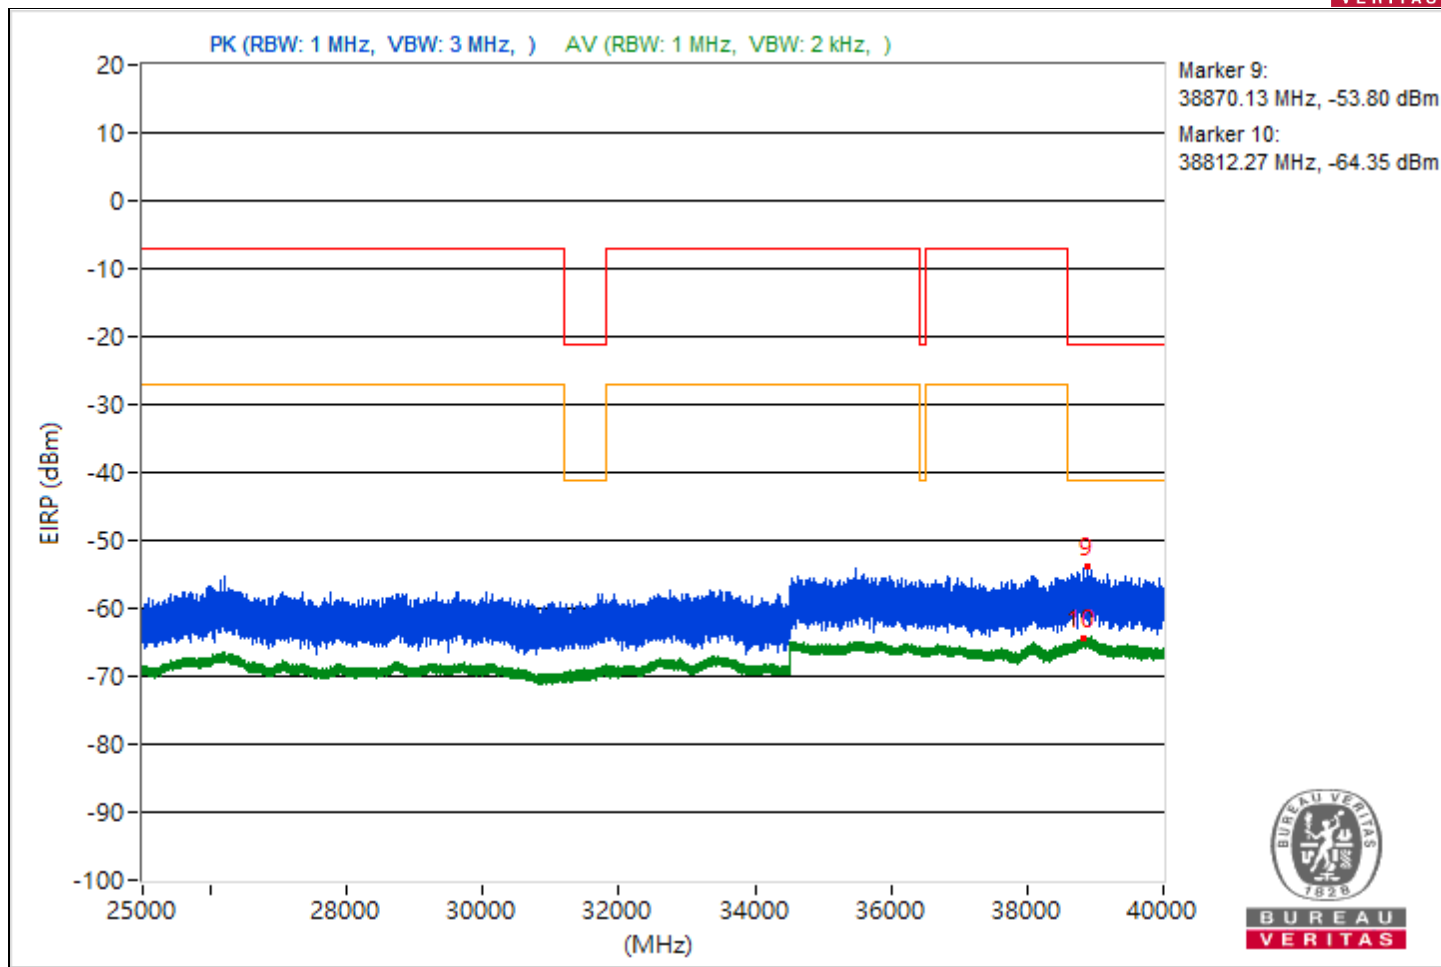





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.01	46.86 PK	74	-27.14	-55.3	-57.69	4.92	-48.4
2	3811.28	36 AV	54	-18	-67.86	-66.6	4.92	-59.26
3	14472.36	45.36 PK	74	-28.64	-56.17	-60.58	4.92	-49.9
4	14473.33	34.72 AV	54	-19.28	-68.3	-68.65	4.92	-60.54
5	20814.1	47.21 PK	74	-26.79	-58.83	-54.28	4.92	-48.05
6	21189.8	36.65 AV	54	-17.35	-66.1	-67.02	4.92	-58.61
7	22415.7	48.56 PK	74	-25.44	-58.97	-52.51	4.92	-46.7
8	22374.8	37.74 AV	54	-16.26	-66.11	-64.88	4.92	-57.52
9	38837.69	41.83 PK	74	-32.17	-59.34	-65.22	4.92	-53.43
10	38819.91	30.98 AV	54	-23.02	-71.94	-72.49	4.92	-64.28

Note: Margin value = Emission Level - Limit value

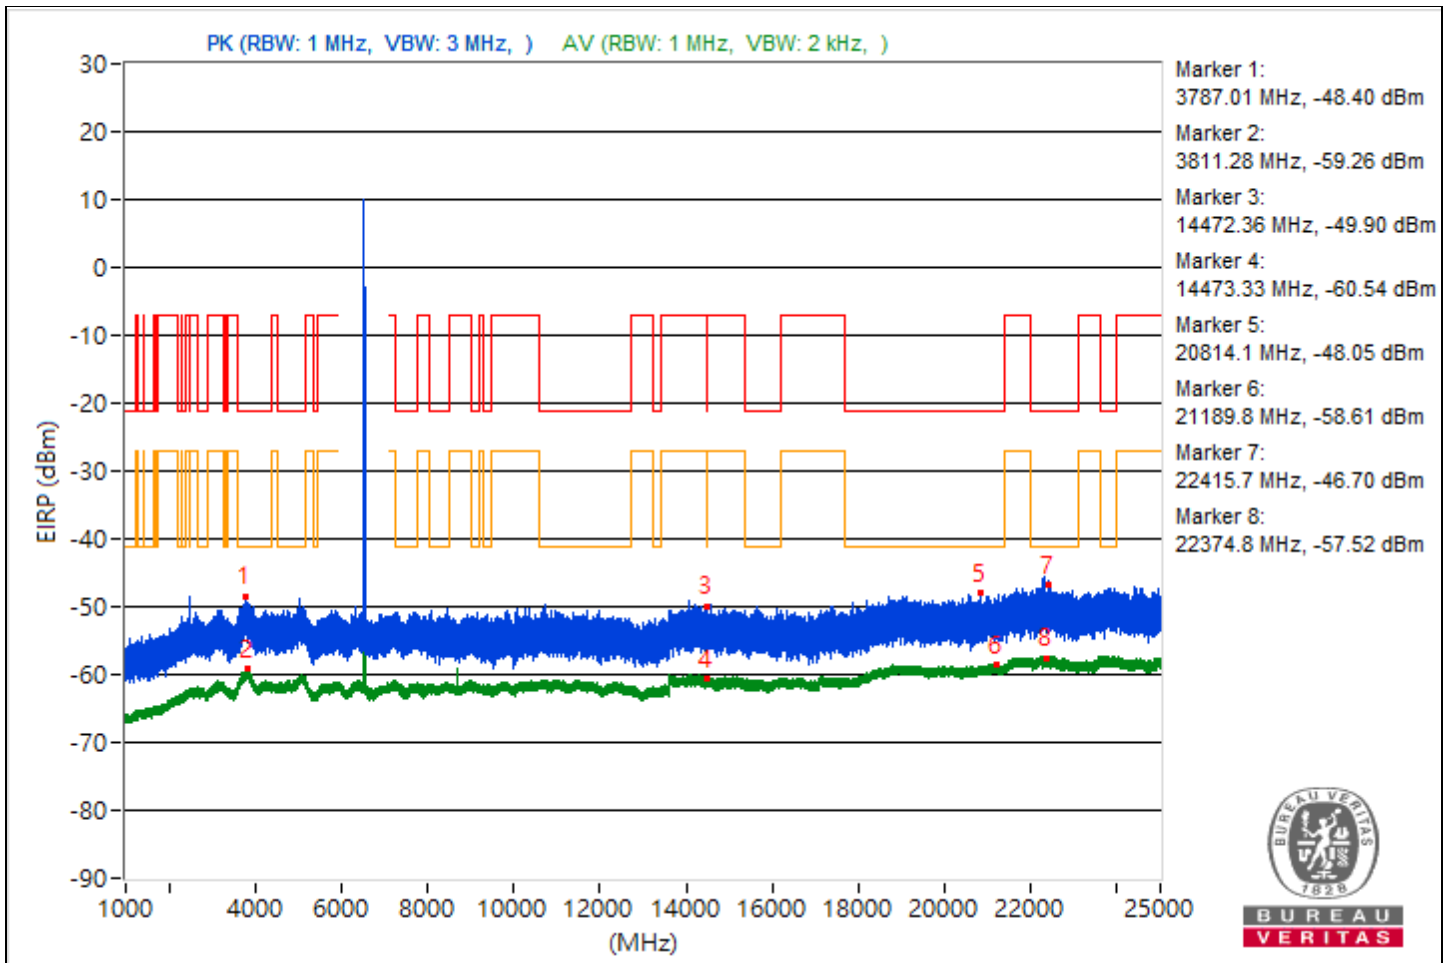

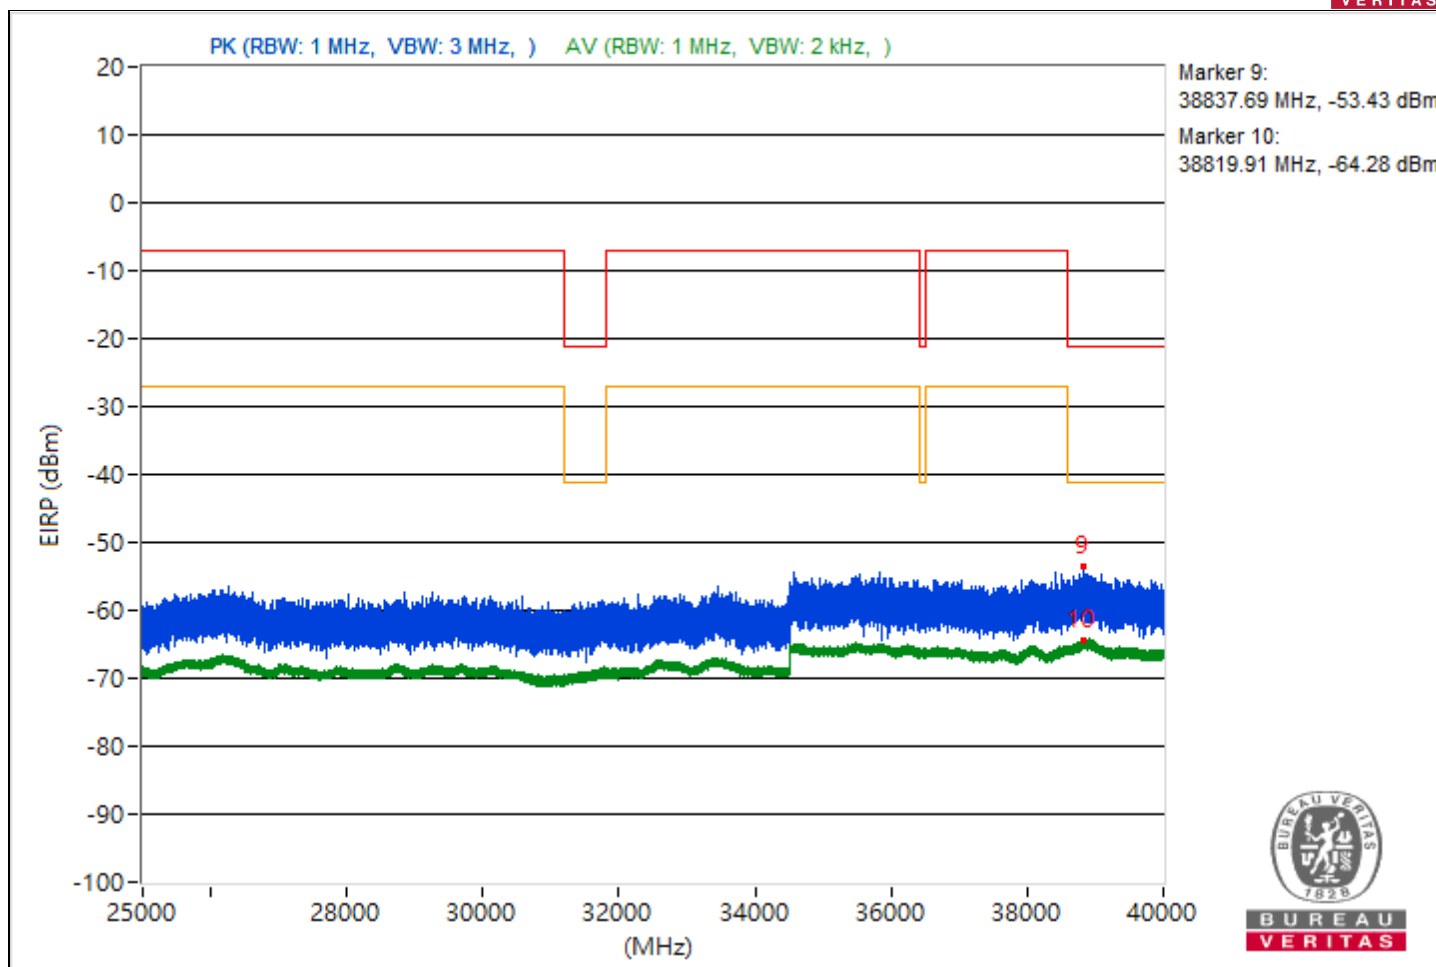





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3732.8	46.34 PK	74	-27.66	-59.22	-55.32	4.92	-48.92
2	3805.6	35.91 AV	54	-18.09	-67.83	-66.79	4.92	-59.35
3	15650.84	45.31 PK	74	-28.69	-61.24	-56.01	4.92	-49.95
4	14481.96	34.83 AV	54	-19.17	-68.79	-67.97	4.92	-60.43
5	19934.4	46.9 PK	74	-27.1	-54.43	-59.6	4.92	-48.36
6	21124.5	36.79 AV	54	-17.21	-66.09	-66.74	4.92	-58.47
7	22520.7	48.42 PK	74	-25.58	-59.11	-52.65	4.92	-46.84
8	22367.8	37.65 AV	54	-16.35	-66.42	-64.82	4.92	-57.61
9	39138.13	40.27 PK	74	-33.73	-60.78	-67.3	4.92	-54.99
10	38847.64	31.2 AV	54	-22.8	-72.27	-71.73	4.92	-64.06

Note: Margin value = Emission Level - Limit value

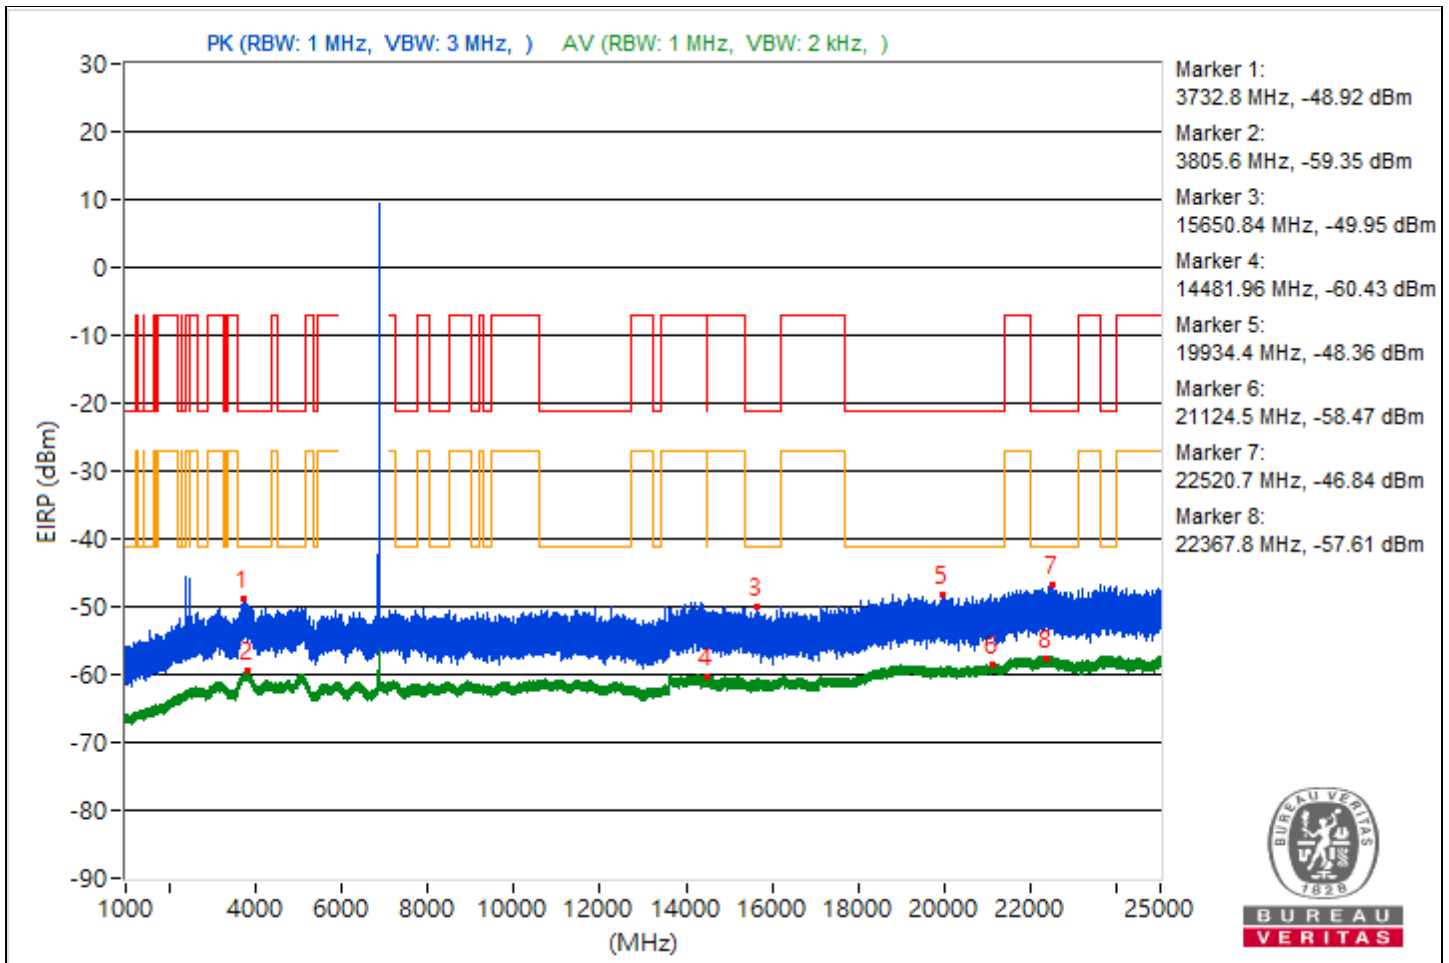

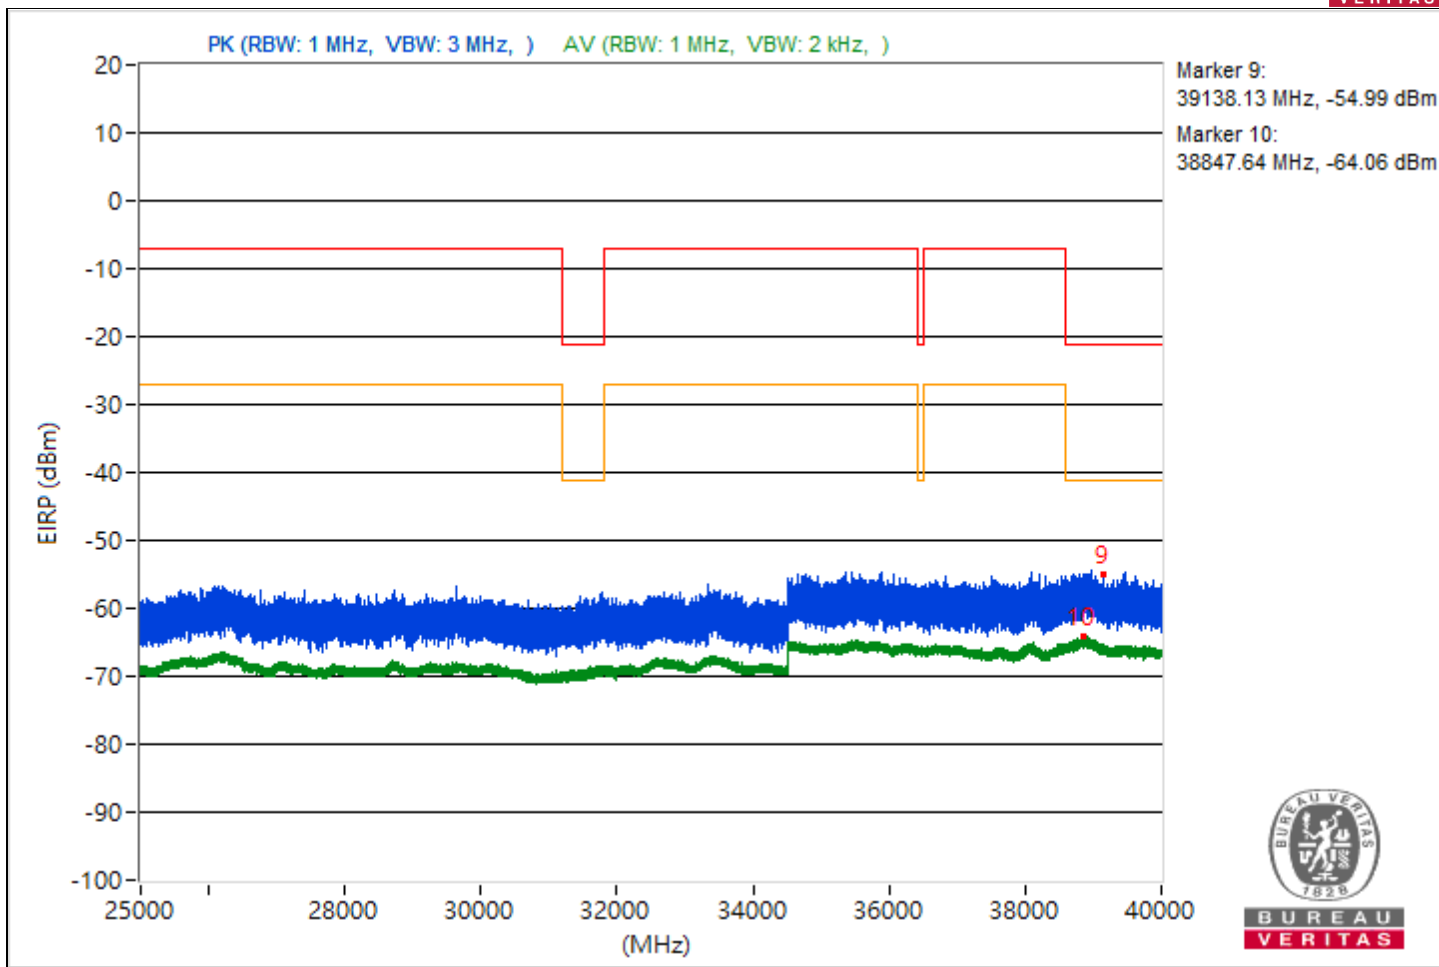





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.12	46.45 PK	74	-27.55	-59.52	-55.06	4.92	-48.81
2	3778.38	35.92 AV	54	-18.08	-66.74	-67.88	4.92	-59.34
3	11385.07	44.85 PK	74	-29.15	-56.14	-62.99	4.92	-50.41
4	14488.89	34.75 AV	54	-19.25	-68.81	-68.1	4.92	-60.51
5	21008.7	46.72 PK	74	-27.28	-54.35	-60.79	4.92	-48.54
6	18904.8	36.66 AV	54	-17.34	-67.04	-66.08	4.92	-58.6
7	22434.2	49.61 PK	74	-24.39	-53.18	-54.02	4.92	-45.65
8	23623.6	37.97 AV	54	-16.03	-64.81	-65.66	4.92	-57.29
9	38931.2	40.33 PK	74	-33.67	-60.85	-66.72	4.92	-54.93
10	38814.84	31.05 AV	54	-22.95	-72.52	-71.78	4.92	-64.21

Note: Margin value = Emission Level - Limit value

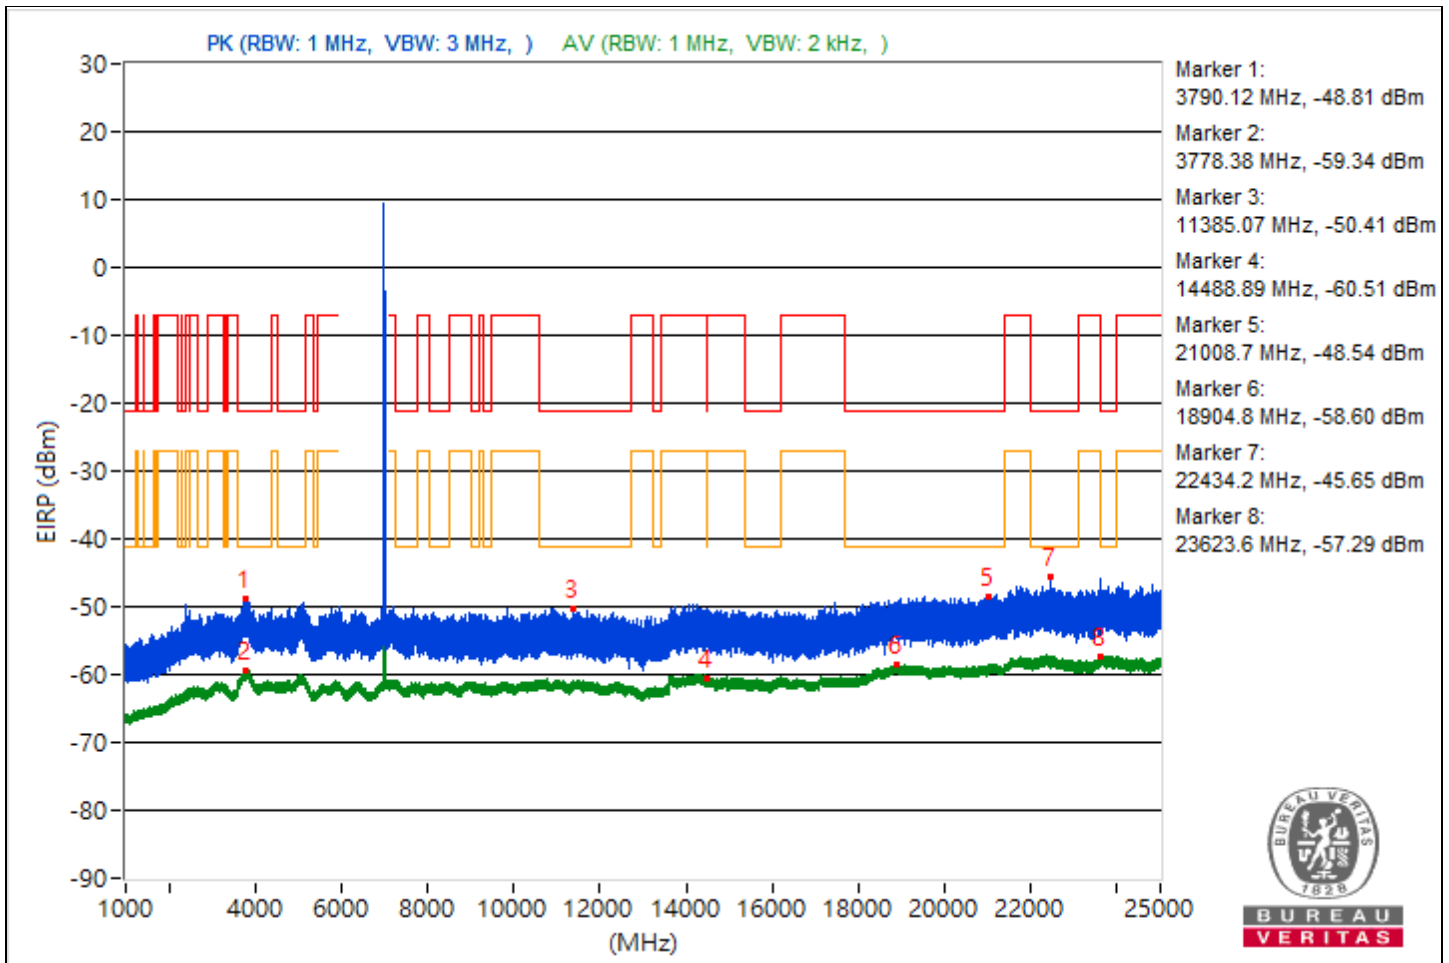

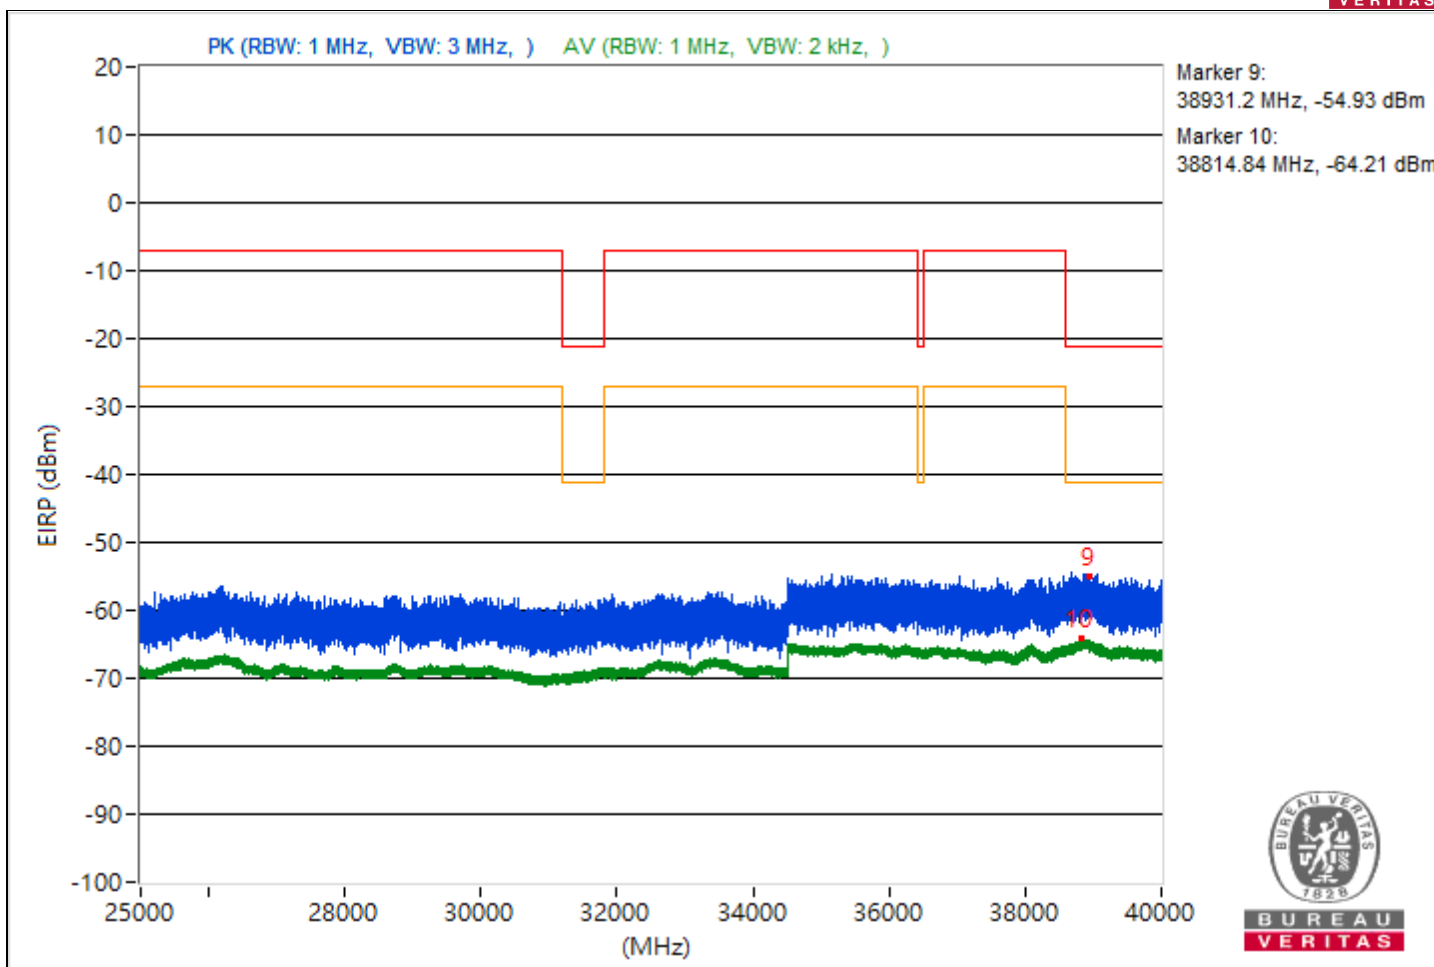





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.72	46.86 PK	74	-27.14	-54.33	-60.14	4.92	-48.4
2	3800	36.07 AV	54	-17.93	-67.46	-66.8	4.92	-59.19
3	15650.76	44.73 PK	74	-29.27	-61.11	-56.83	4.92	-50.53
4	14479.02	35.23 AV	54	-18.77	-68.1	-67.82	4.92	-60.03
5	18682.9	48.23 PK	74	-25.77	-53.61	-56.94	4.92	-47.03
6	21146.4	36.71 AV	54	-17.29	-65.86	-67.22	4.92	-58.55
7	22289	49.43 PK	74	-24.57	-54.9	-52.86	4.92	-45.83
8	23638.4	38.03 AV	54	-15.97	-65.62	-64.75	4.92	-57.23
9	38881.51	40.92 PK	74	-33.08	-60.38	-65.69	4.92	-54.34
10	38829.69	31.13 AV	54	-22.87	-72.64	-71.55	4.92	-64.13

Note: Margin value = Emission Level - Limit value

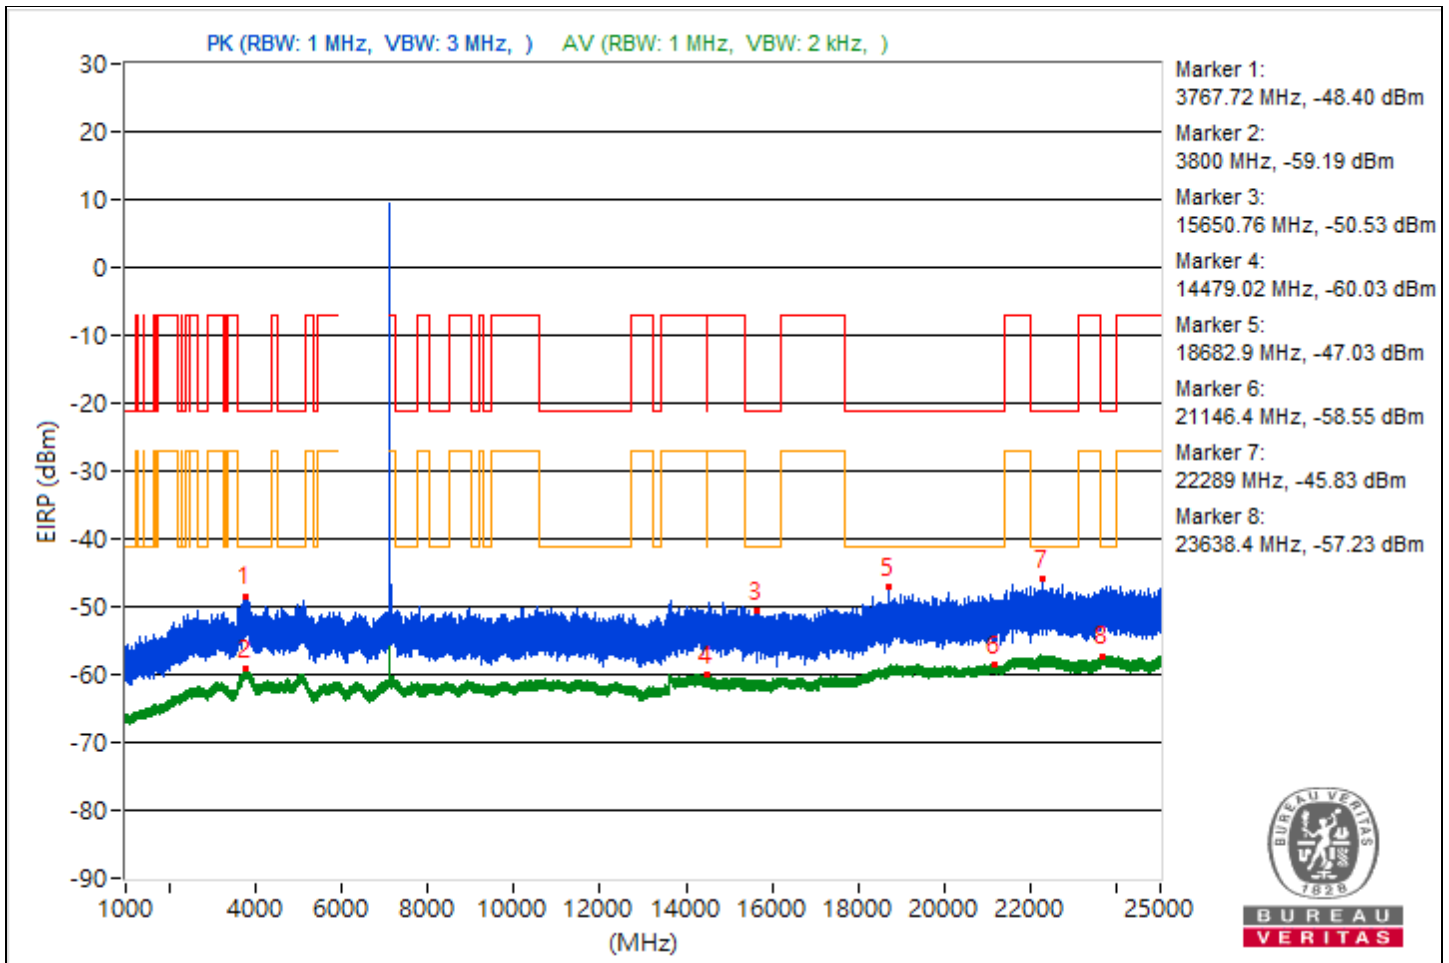

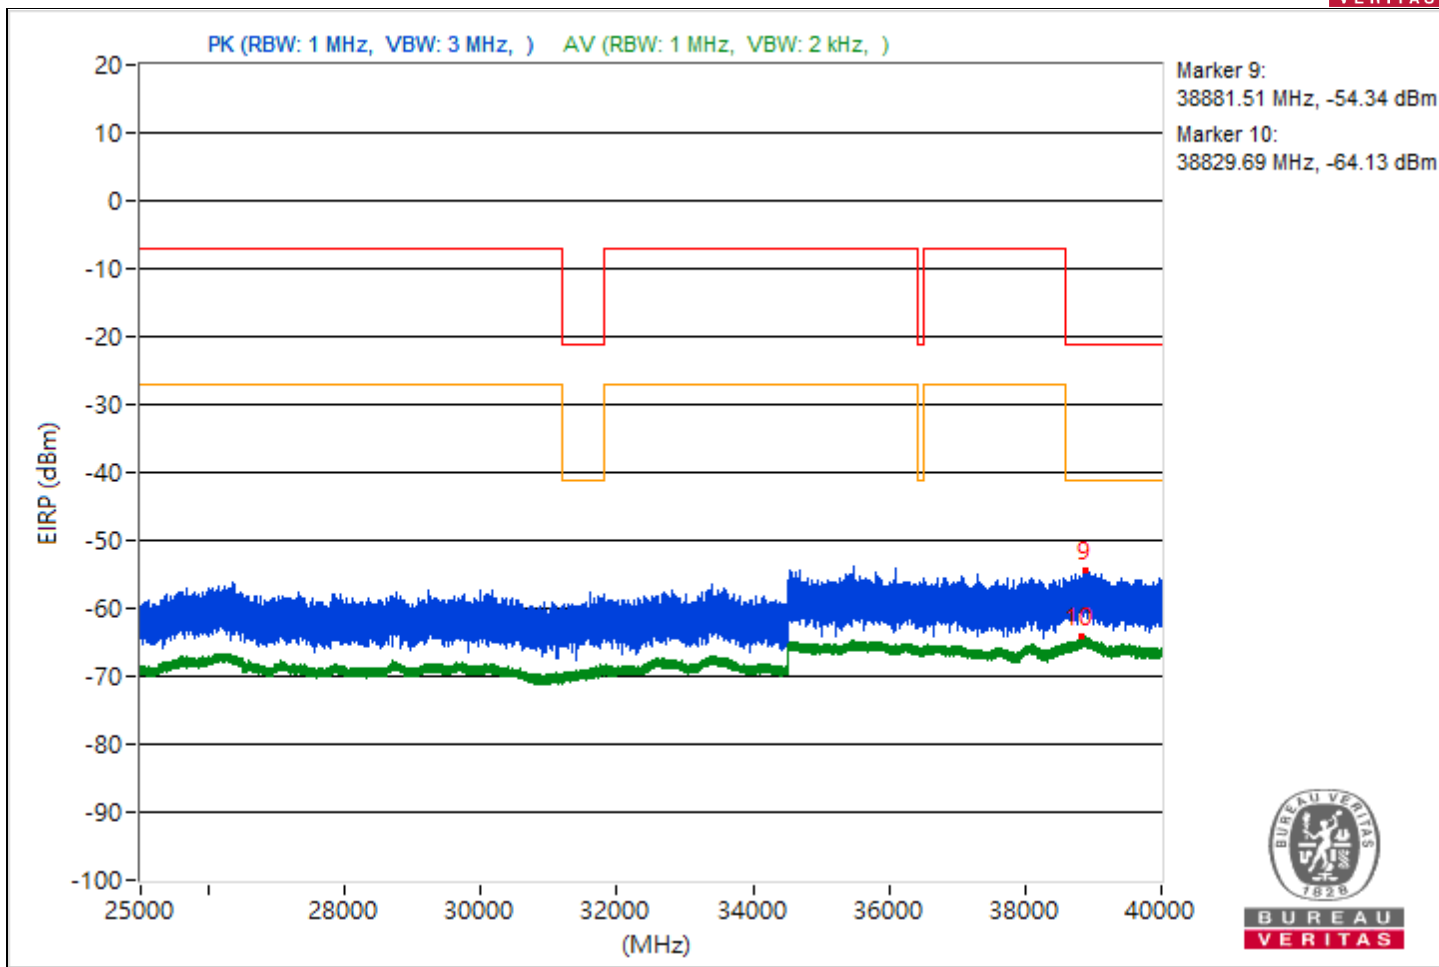





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.44	46.29 PK	74	-27.71	-59.94	-55.13	4.92	-48.97
2	3826.68	36.04 AV	54	-17.96	-67.49	-66.83	4.92	-59.22
3	8463.38	44.74 PK	74	-29.26	-57.02	-60.59	4.92	-50.52
4	15363.73	34.74 AV	54	-19.26	-68	-68.96	4.92	-60.52
5	18838.9	47.27 PK	74	-26.73	-59.49	-53.98	4.92	-47.99
6	21380.8	36.84 AV	54	-17.16	-66.04	-66.69	4.92	-58.42
7	23767.9	48.7 PK	74	-25.3	-57.46	-52.74	4.92	-46.56
8	23763.8	37.92 AV	54	-16.08	-66.02	-64.63	4.92	-57.34
9	38983.2	40.87 PK	74	-33.13	-60.18	-66.72	4.92	-54.39
10	38844.89	31.22 AV	54	-22.78	-71.73	-72.23	4.92	-64.04

Note: Margin value = Emission Level - Limit value

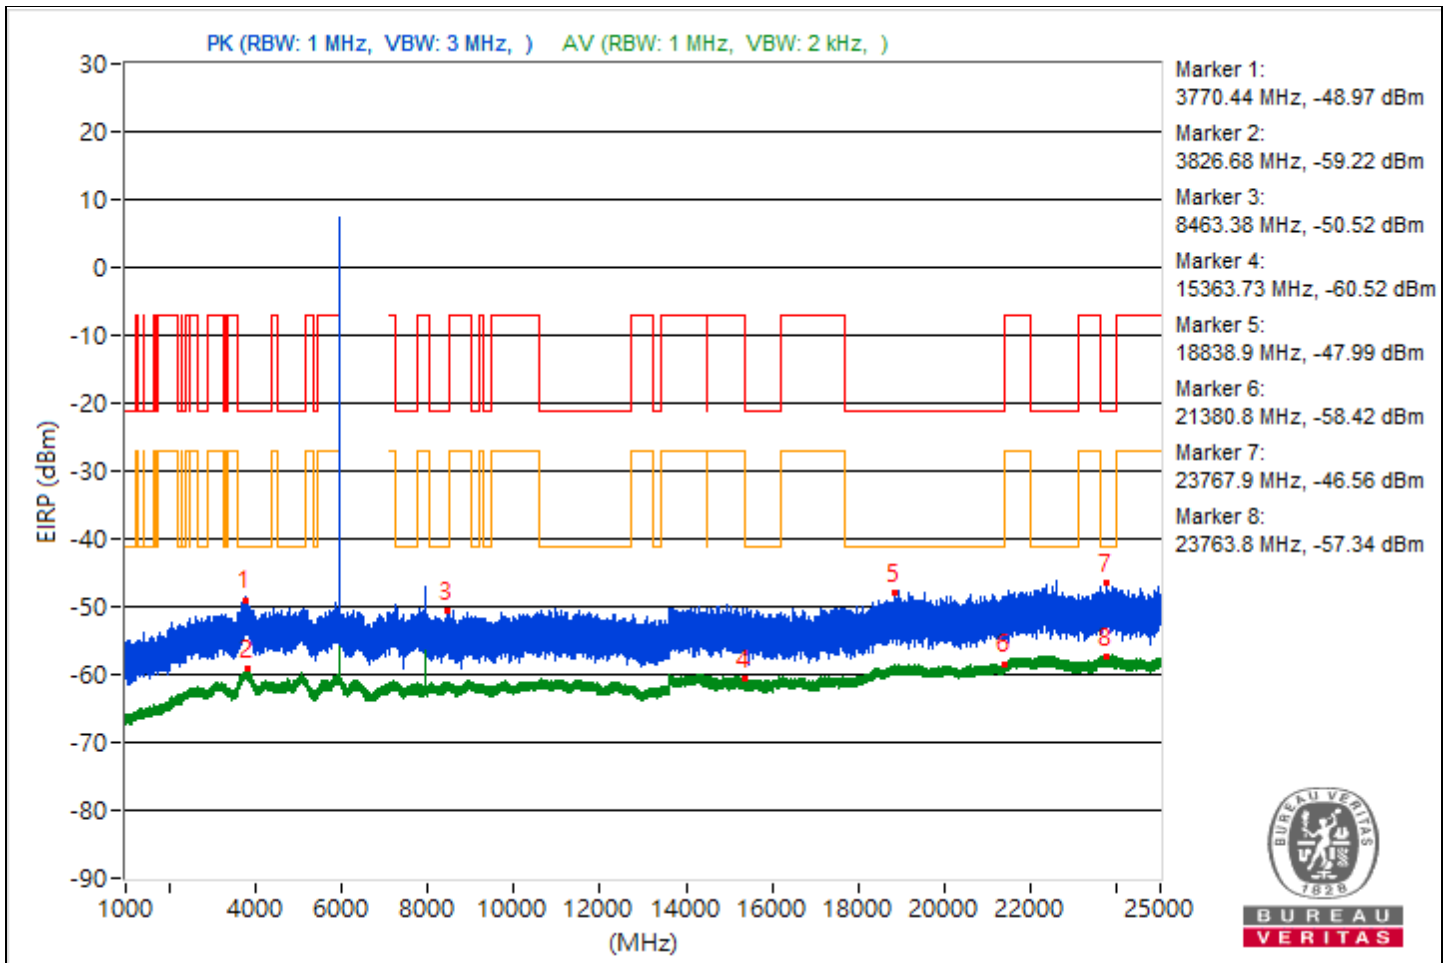

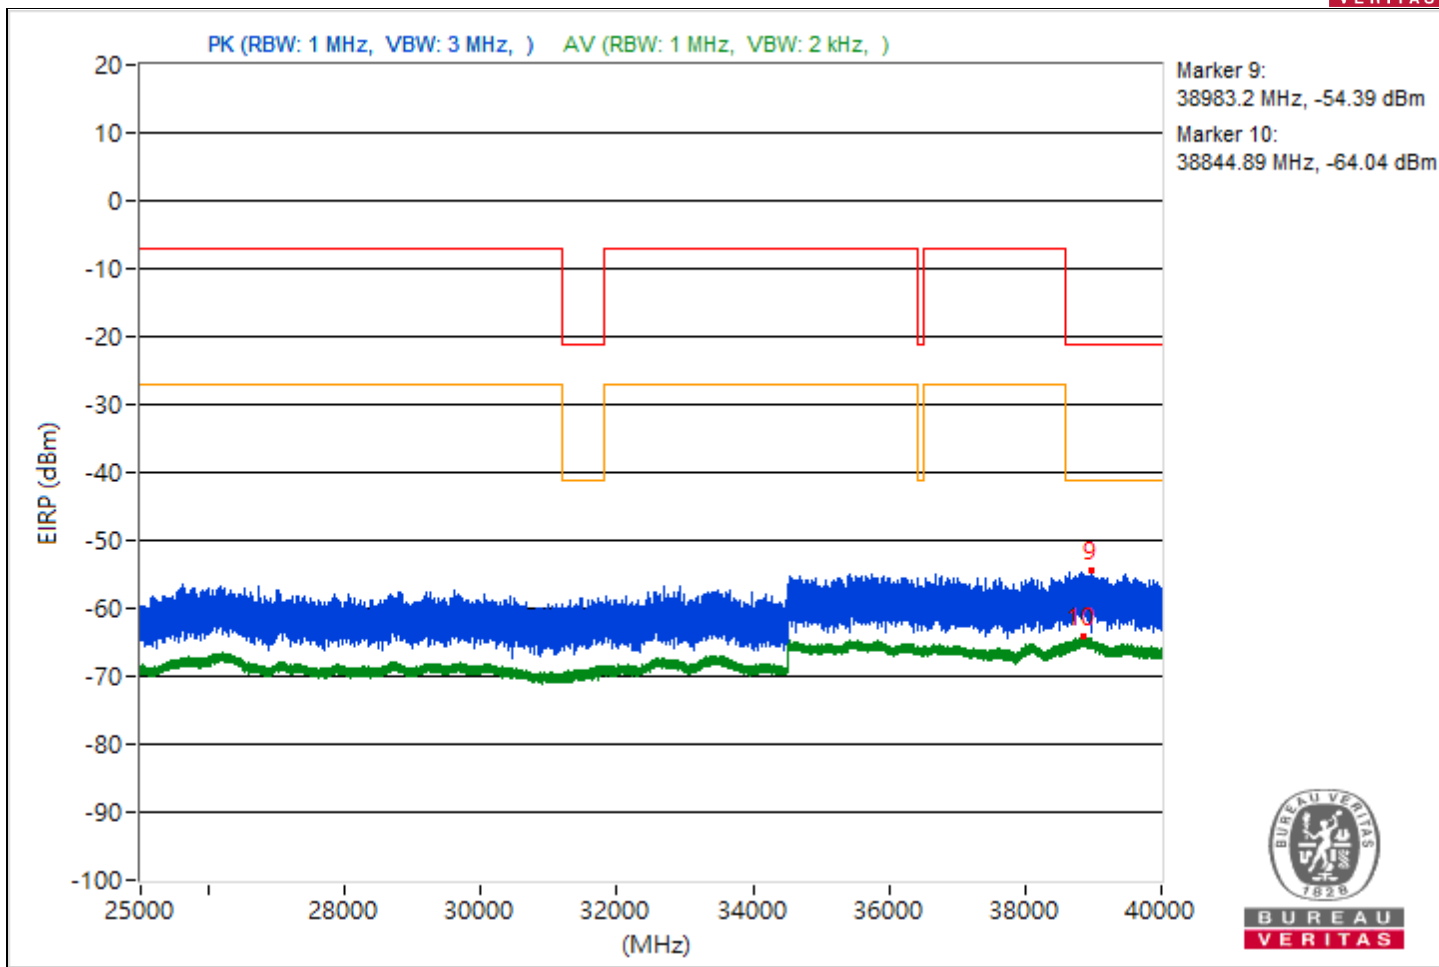





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3758.54	46.65 PK	74	-27.35	-55.67	-57.64	4.92	-48.61
2	3794.63	36.11 AV	54	-17.89	-67.24	-66.92	4.92	-59.15
3	7662.44	45.15 PK	74	-28.85	-55.96	-62.15	4.92	-50.11
4	14494.84	34.74 AV	54	-19.26	-69.23	-67.78	4.92	-60.52
5	21051.6	47.33 PK	74	-26.67	-57.8	-54.52	4.92	-47.93
6	21141.3	36.64 AV	54	-17.36	-66.06	-67.1	4.92	-58.62
7	22239.1	49.52 PK	74	-24.48	-52.31	-55.68	4.92	-45.74
8	22236.6	38.04 AV	54	-15.96	-65.56	-64.78	4.92	-57.22
9	38890.93	41.57 PK	74	-32.43	-59.89	-64.54	4.92	-53.69
10	38860.53	31.01 AV	54	-22.99	-72.59	-71.81	4.92	-64.25

Note: Margin value = Emission Level - Limit value

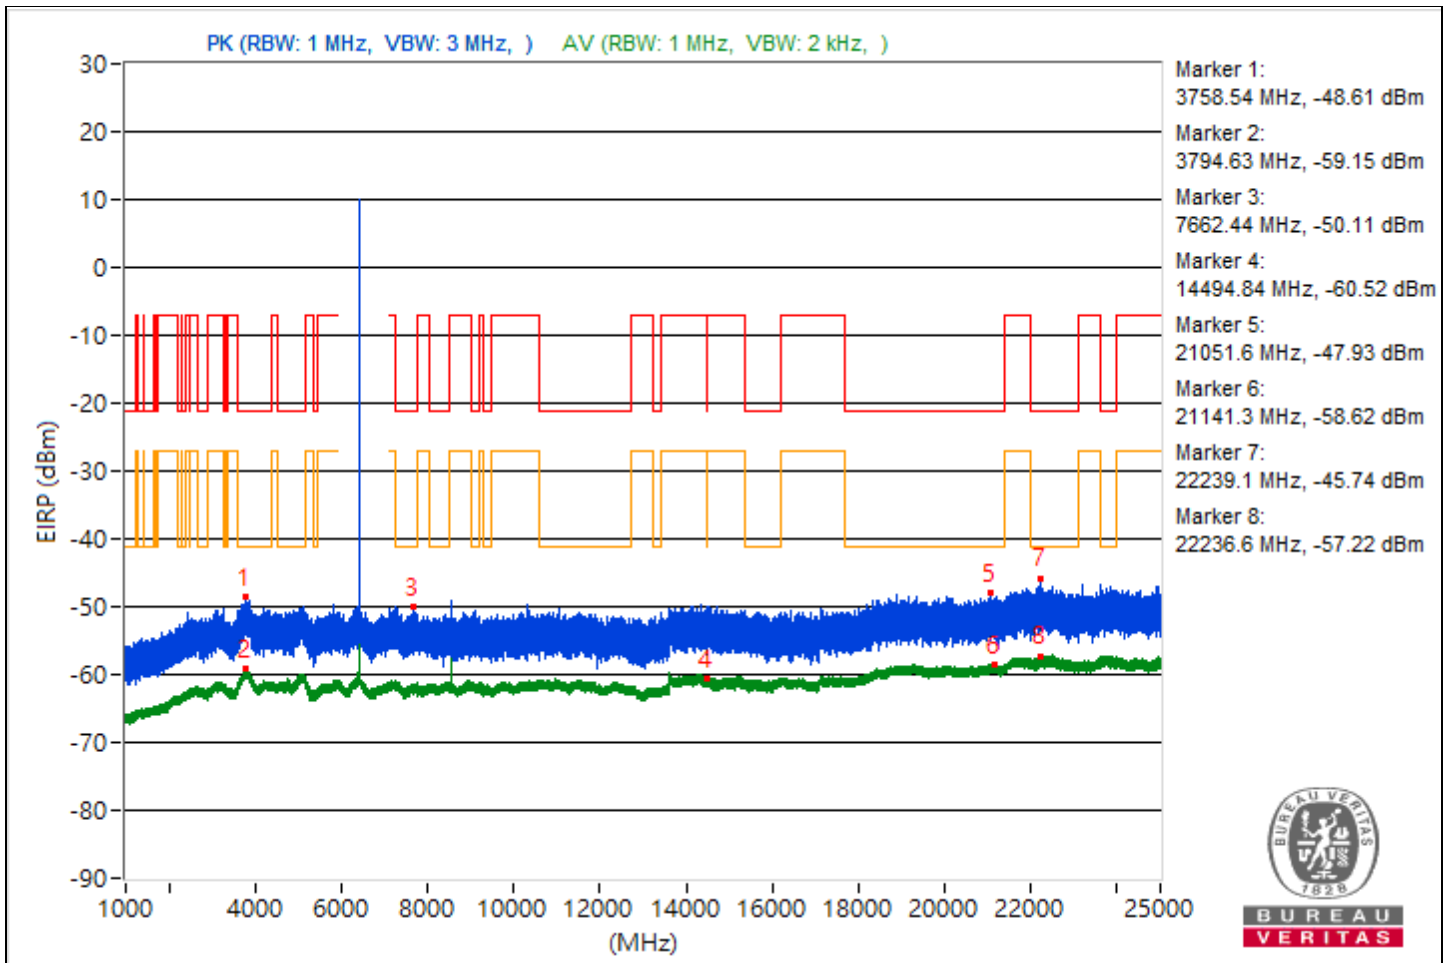

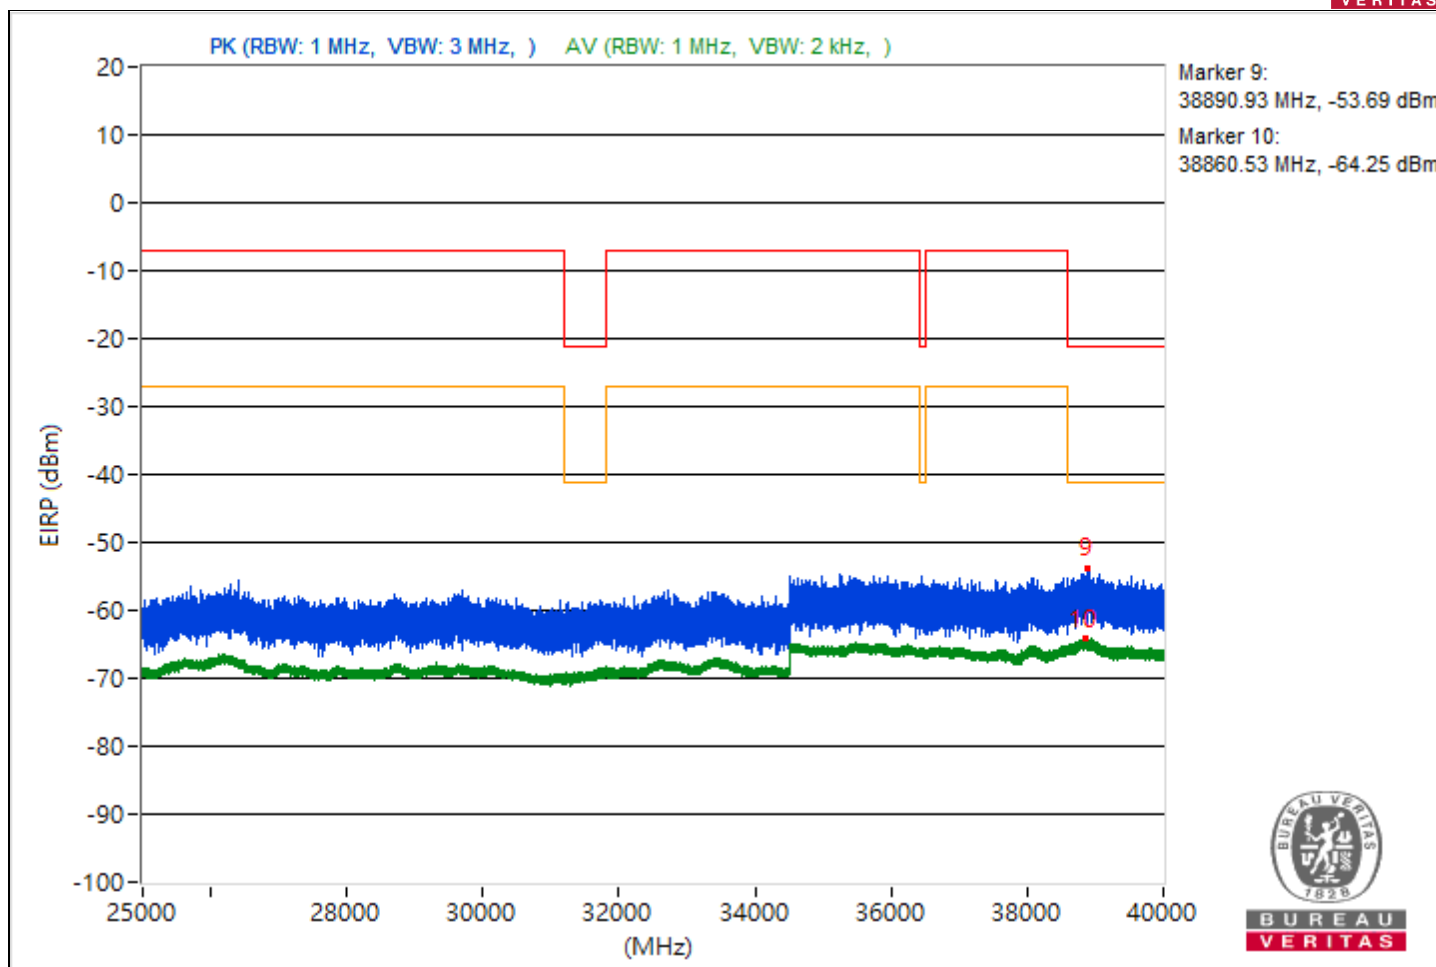





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.63	46.36 PK	74	-27.64	-59.76	-55.1	4.92	-48.9
2	3818.82	35.88 AV	54	-18.12	-67.68	-66.97	4.92	-59.38
3	15504.53	45.76 PK	74	-28.24	-56.47	-58.66	4.92	-49.5
4	14494.13	34.96 AV	54	-19.04	-68.46	-68.02	4.92	-60.3
5	20879.5	46.86 PK	74	-27.14	-54.05	-61.43	4.92	-48.4
6	21158.8	36.75 AV	54	-17.25	-66.84	-66.07	4.92	-58.51
7	22859.7	48.21 PK	74	-25.79	-52.93	-59.02	4.92	-47.05
8	23834.6	37.87 AV	54	-16.13	-64.6	-66.19	4.92	-57.39
9	38866.84	41.39 PK	74	-32.61	-60.14	-64.52	4.92	-53.87
10	38859.2	30.97 AV	54	-23.03	-72.69	-71.8	4.92	-64.29

Note: Margin value = Emission Level - Limit value

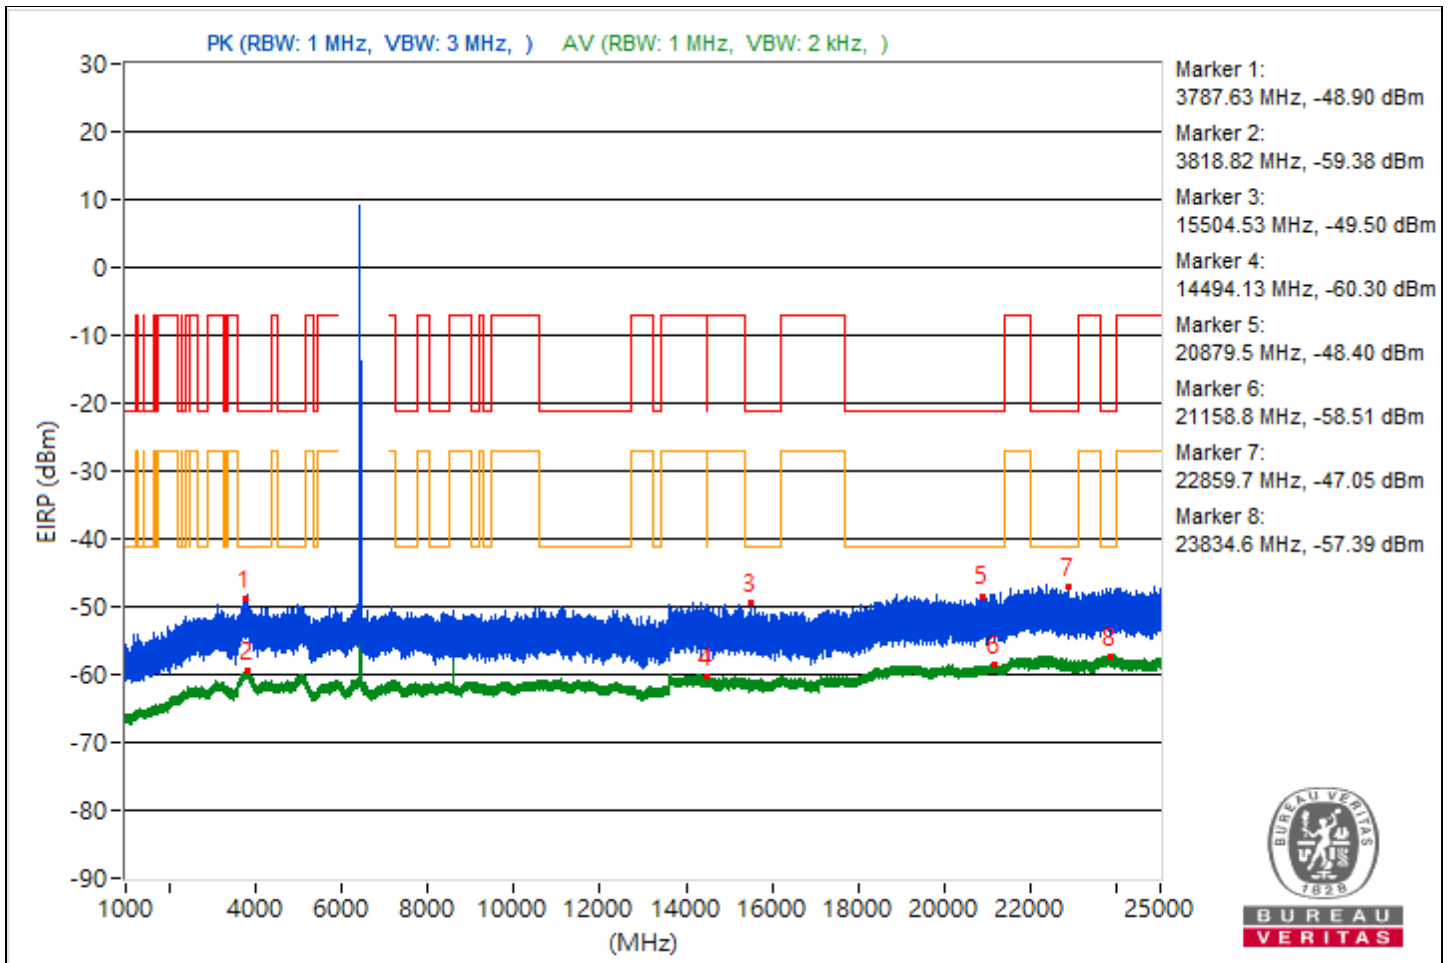

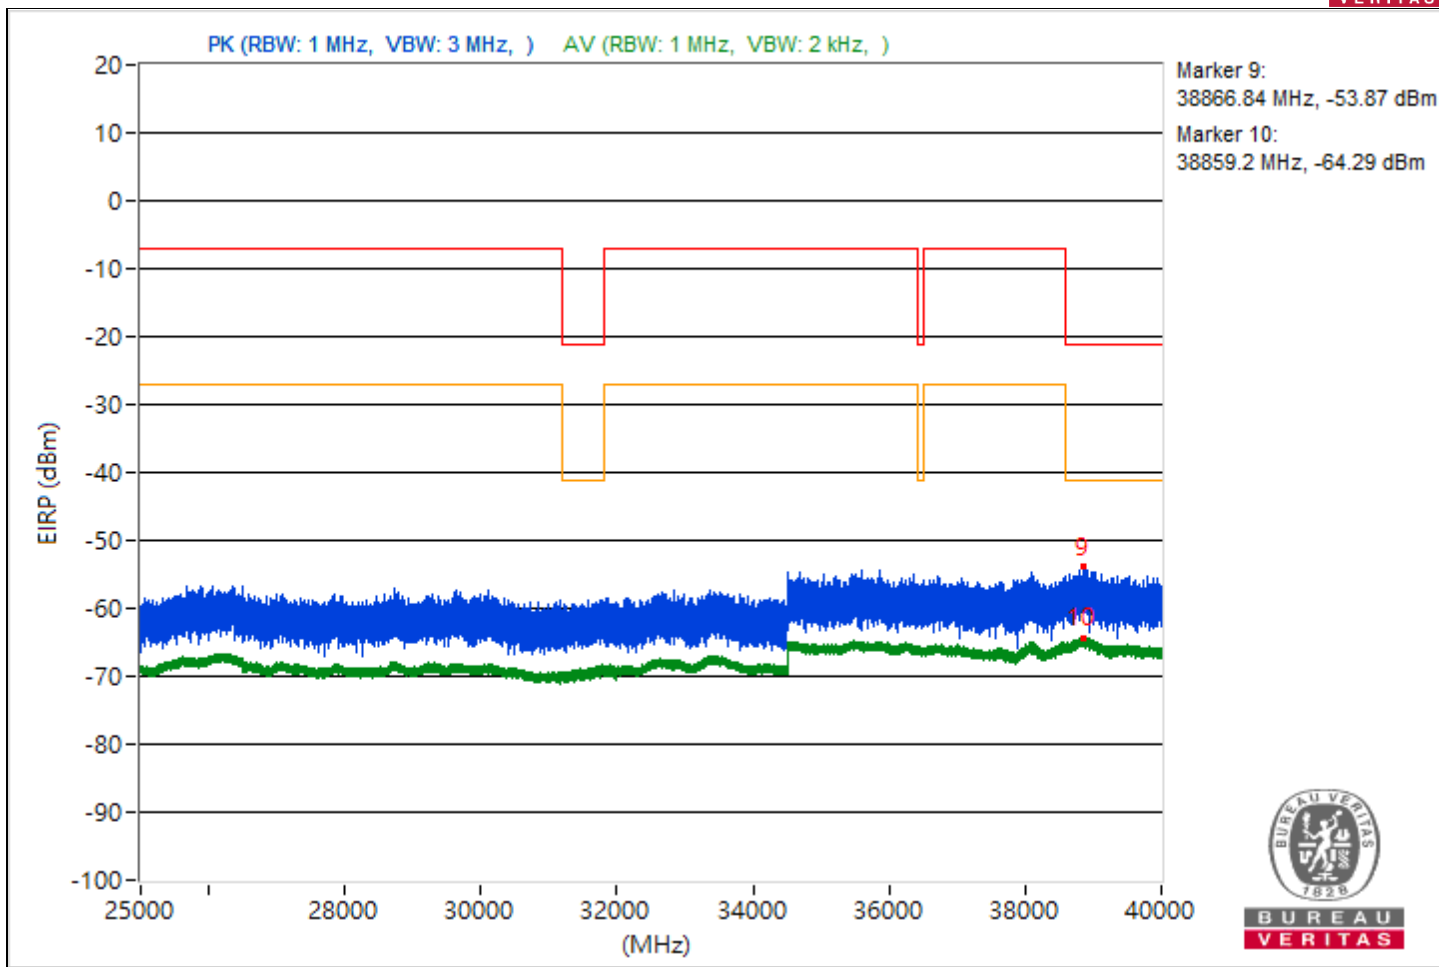





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3824.11	46.18 PK	74	-27.82	-60.22	-55.19	4.92	-49.08
2	3818.9	35.96 AV	54	-18.04	-67.74	-66.76	4.92	-59.3
3	10752.62	44.93 PK	74	-29.07	-61.1	-56.56	4.92	-50.33
4	14473.69	34.92 AV	54	-19.08	-69.03	-67.63	4.92	-60.34
5	21371.7	47.48 PK	74	-26.52	-60.86	-53.41	4.92	-47.78
6	21111	36.68 AV	54	-17.32	-66.04	-67.02	4.92	-58.58
7	22467.3	49.11 PK	74	-24.89	-57.43	-52.21	4.92	-46.15
8	23689.3	37.94 AV	54	-16.06	-65.88	-64.71	4.92	-57.32
9	38887.64	40.96 PK	74	-33.04	-65.53	-60.38	4.92	-54.3
10	38922.58	30.91 AV	54	-23.09	-71.76	-72.87	4.92	-64.35

Note: Margin value = Emission Level - Limit value

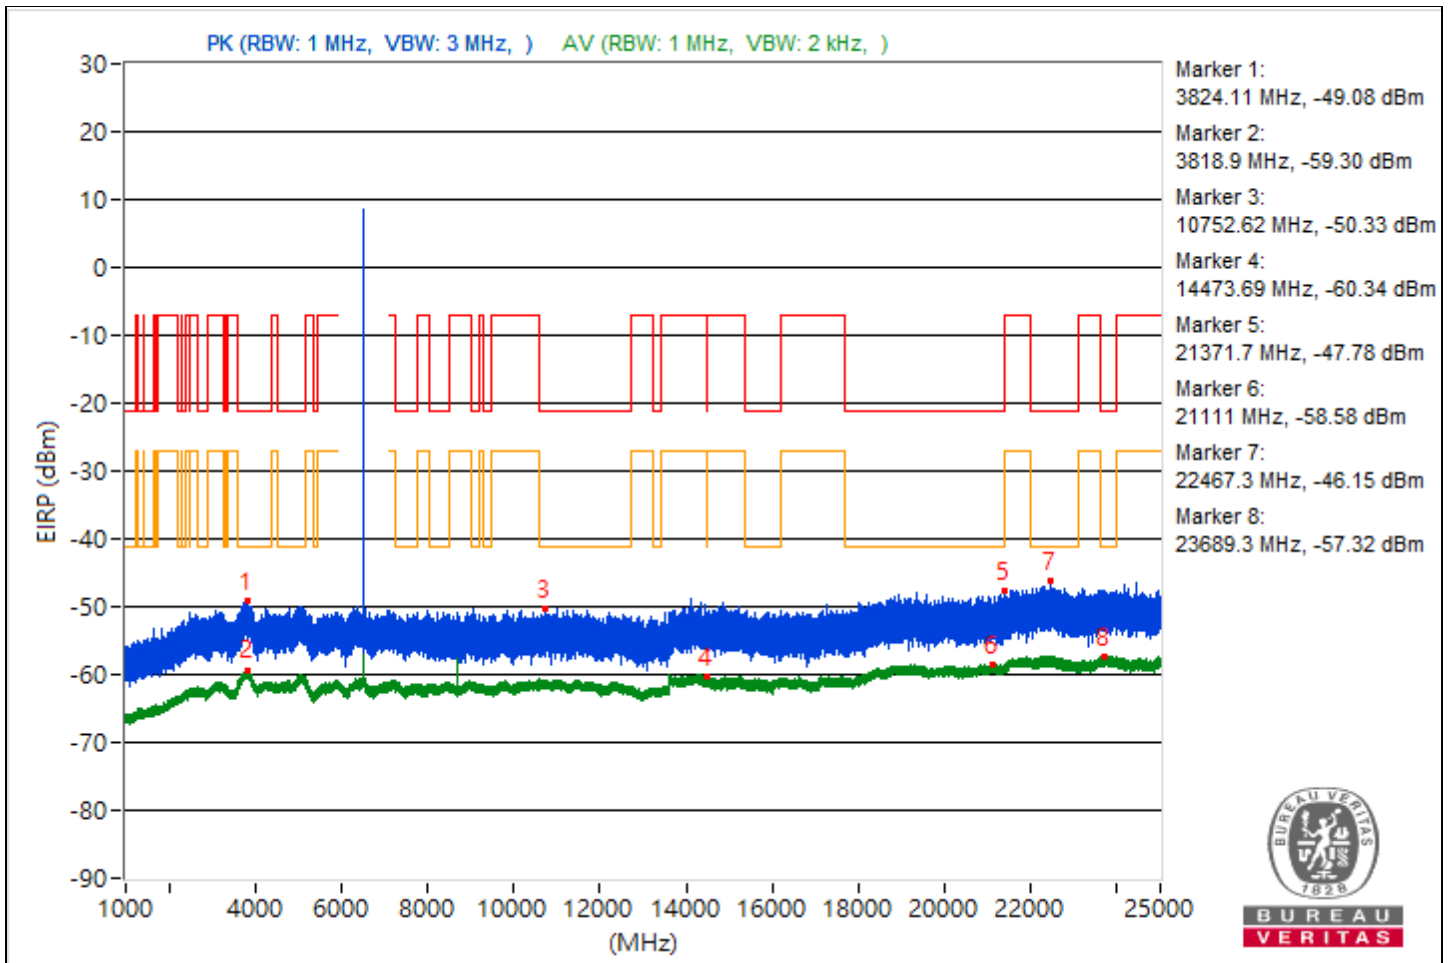

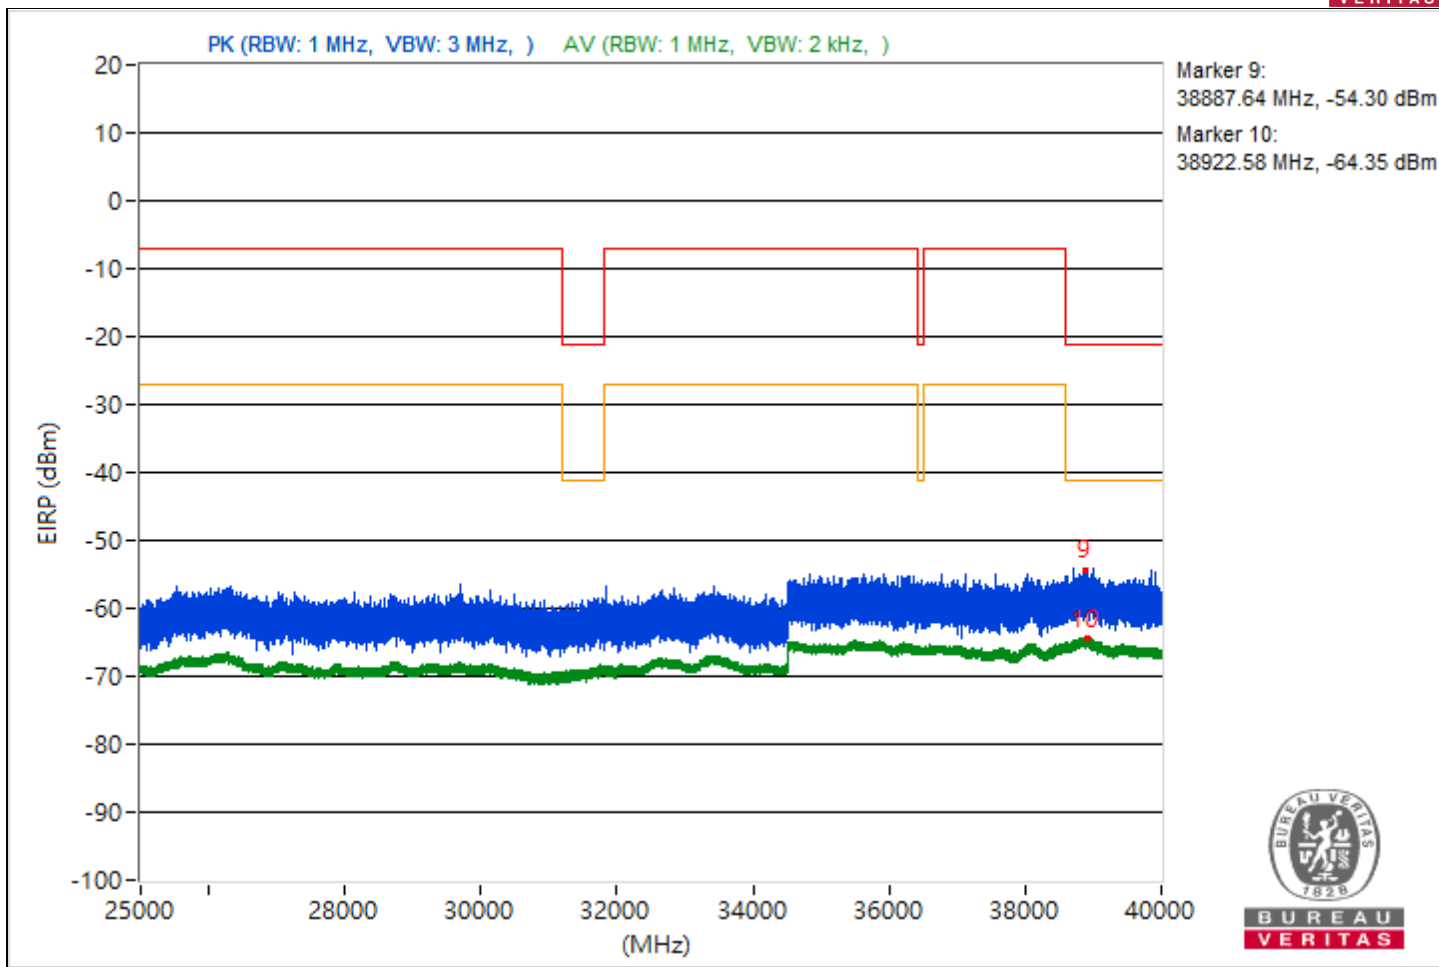





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.97	46.65 PK	74	-27.35	-59.21	-54.9	4.92	-48.61
2	3823.96	35.94 AV	54	-18.06	-67.52	-66.99	4.92	-59.32
3	8040.27	44.87 PK	74	-29.13	-56.29	-62.26	4.92	-50.39
4	14494.31	34.82 AV	54	-19.18	-68.74	-68.03	4.92	-60.44
5	21078.9	47.31 PK	74	-26.69	-62.49	-53.37	4.92	-47.95
6	21119	36.69 AV	54	-17.31	-67.19	-65.9	4.92	-58.57
7	23711.6	48.65 PK	74	-25.35	-56.47	-53.21	4.92	-46.61
8	23957.7	37.99 AV	54	-16.01	-64.64	-65.85	4.92	-57.27
9	38780.89	40.73 PK	74	-33.27	-66.55	-60.39	4.92	-54.53
10	38811.73	31.2 AV	54	-22.8	-72.49	-71.55	4.92	-64.06

Note: Margin value = Emission Level - Limit value

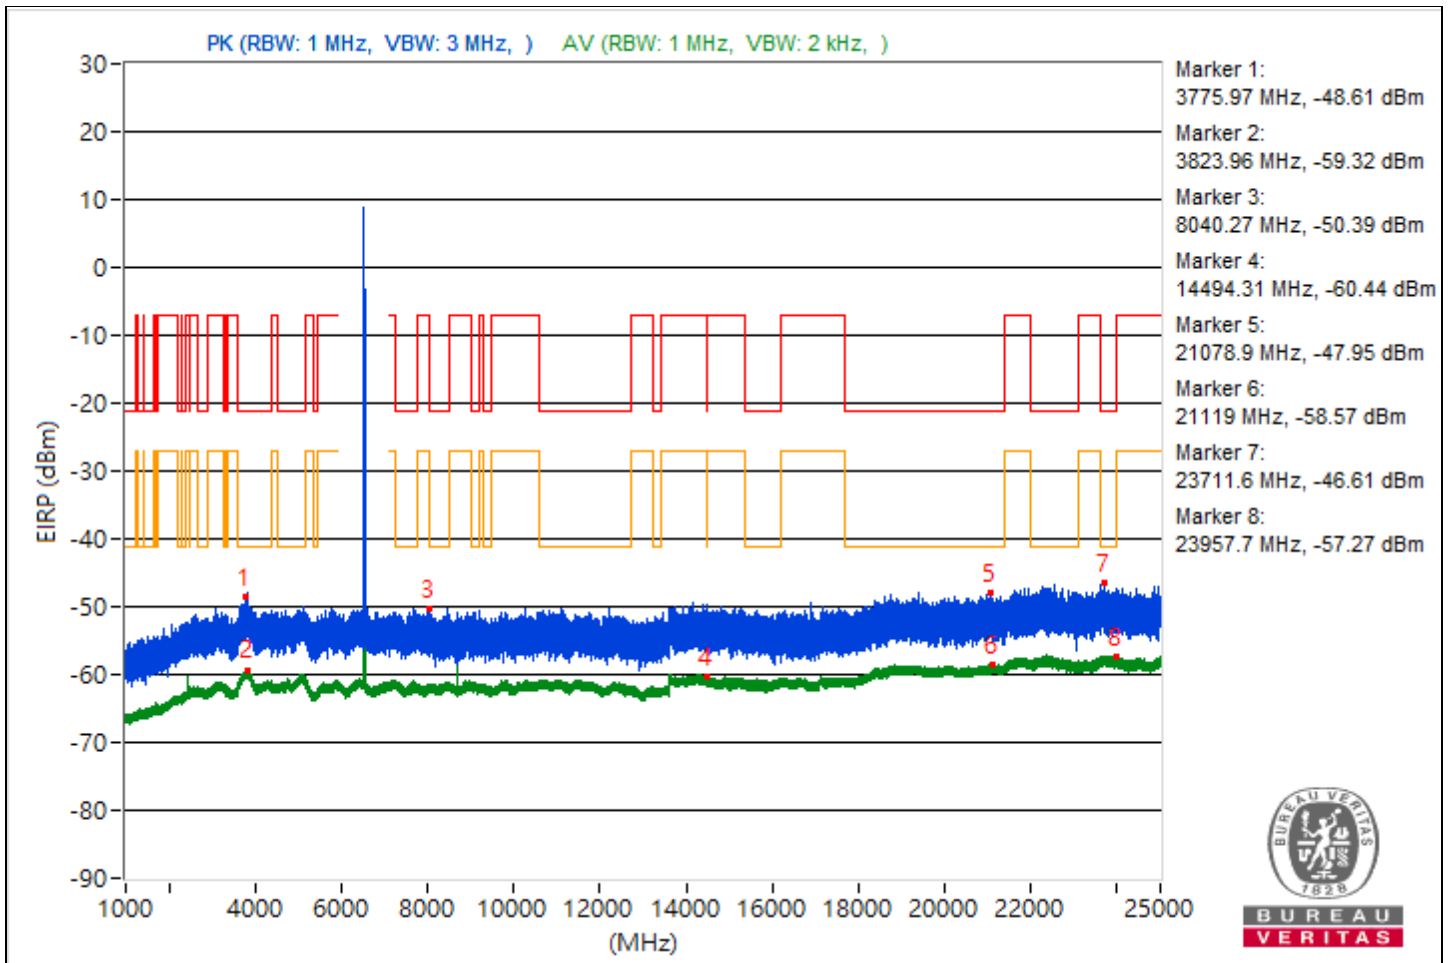

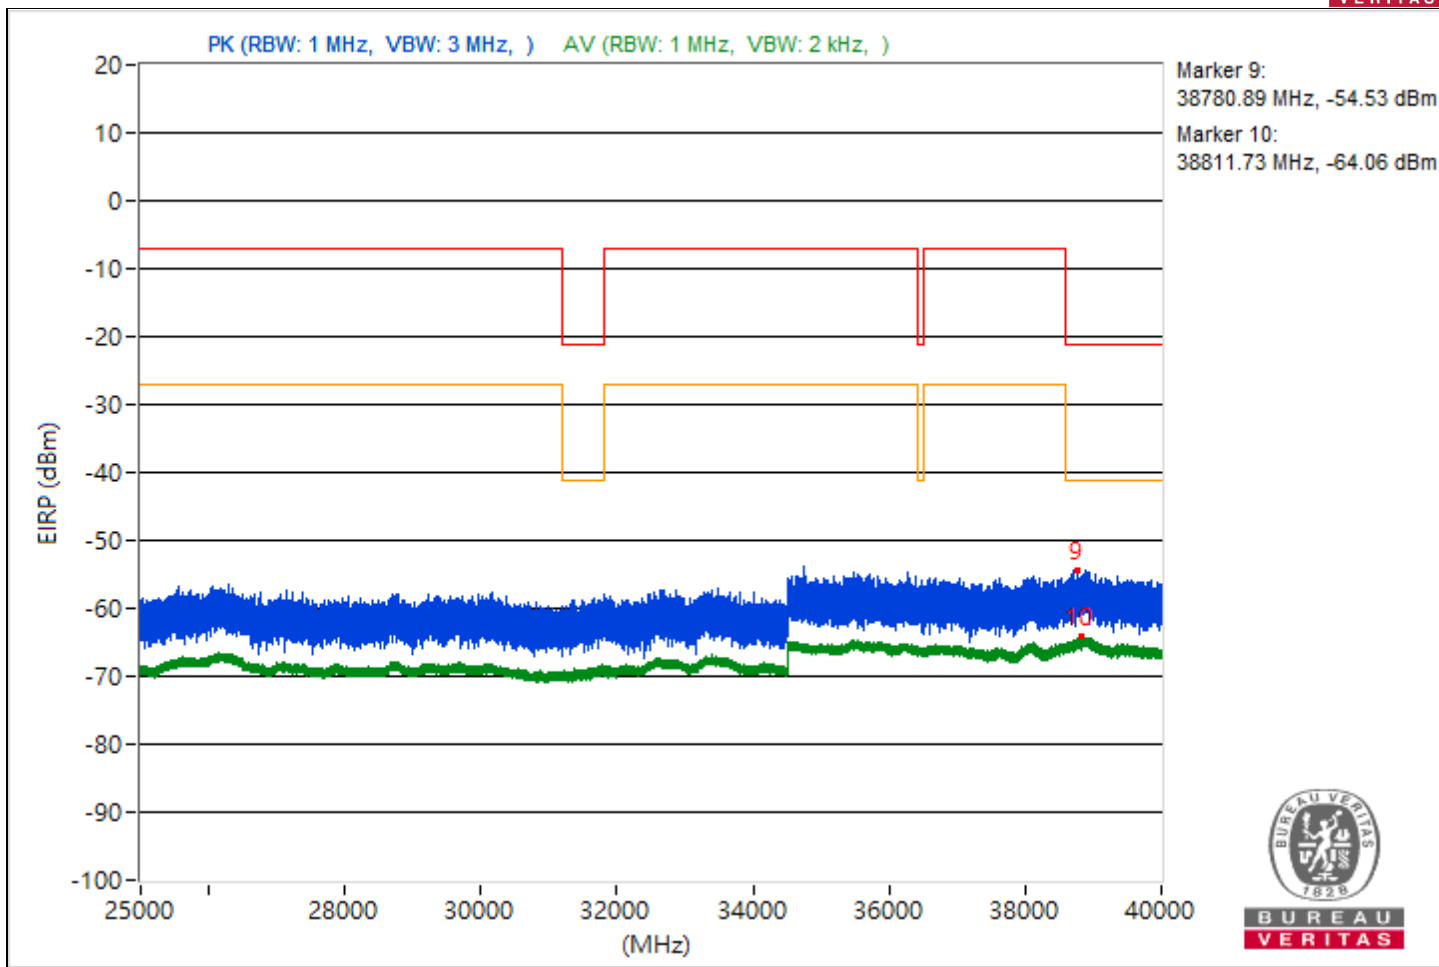





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3694.46	45.91 PK	74	-28.09	-56.16	-58.79	4.92	-49.35
2	3773.63	35.84 AV	54	-18.16	-67.69	-67.03	4.92	-59.42
3	7274.41	45.8 PK	74	-28.2	-59.3	-56.08	4.92	-49.46
4	14487.47	35.06 AV	54	-18.94	-67.74	-68.57	4.92	-60.2
5	18976.6	46.99 PK	74	-27.01	-60.16	-54.17	4.92	-48.27
6	21139.2	36.94 AV	54	-17.06	-66	-66.5	4.92	-58.32
7	22147.1	47.78 PK	74	-26.22	-53.31	-59.63	4.92	-47.48
8	22323.8	38.17 AV	54	-15.83	-64.61	-65.48	4.92	-57.09
9	38793.51	40.35 PK	74	-33.65	-60.81	-66.76	4.92	-54.91
10	38844.71	31.22 AV	54	-22.78	-72.35	-71.63	4.92	-64.04

Note: Margin value = Emission Level - Limit value

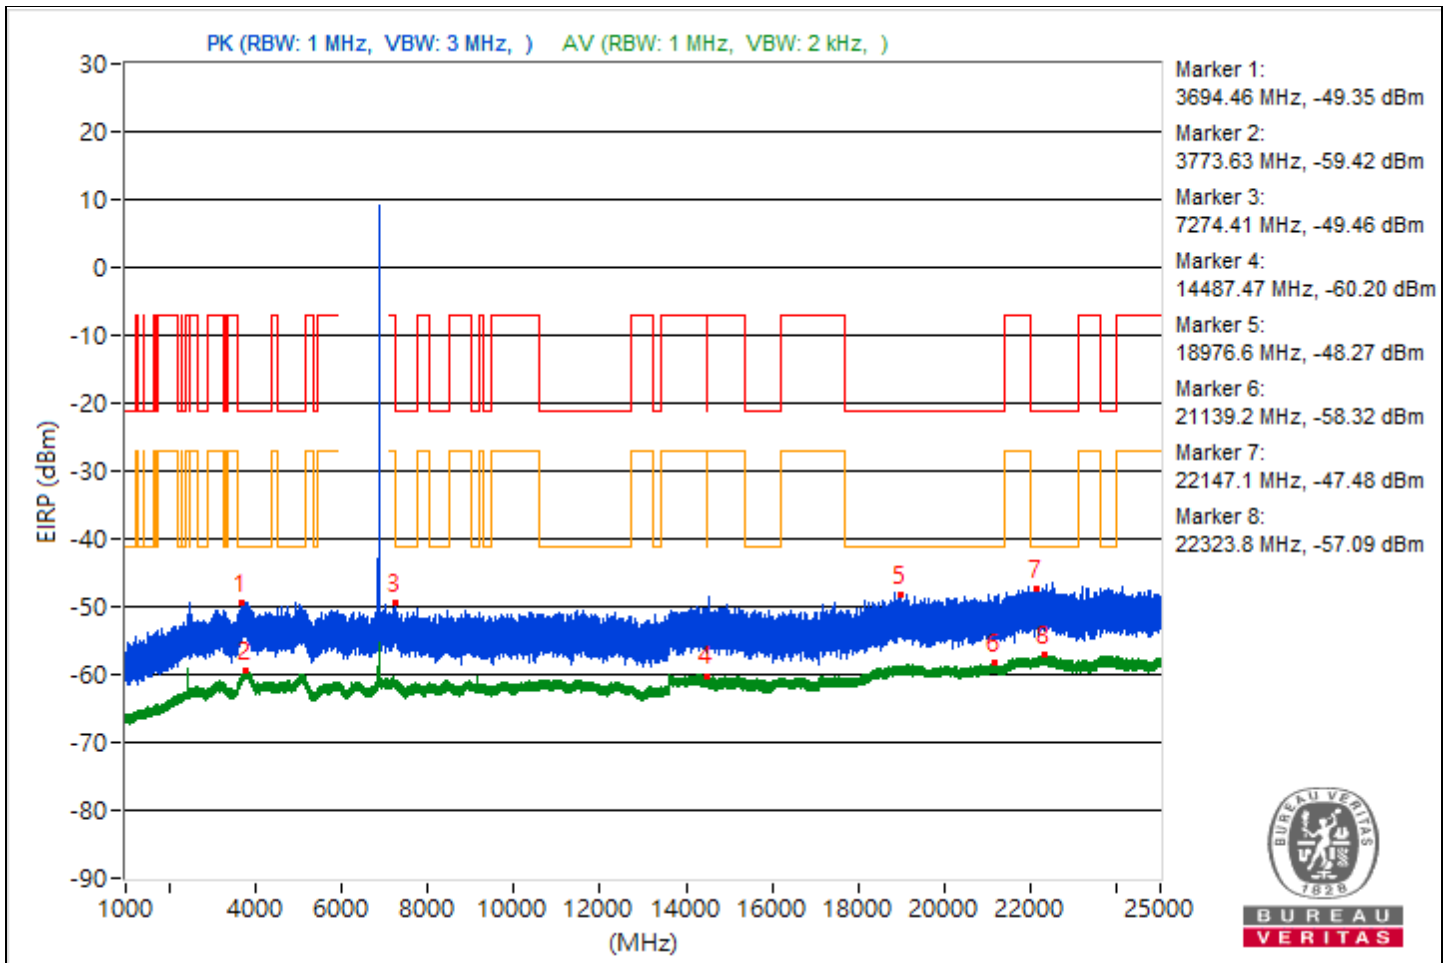

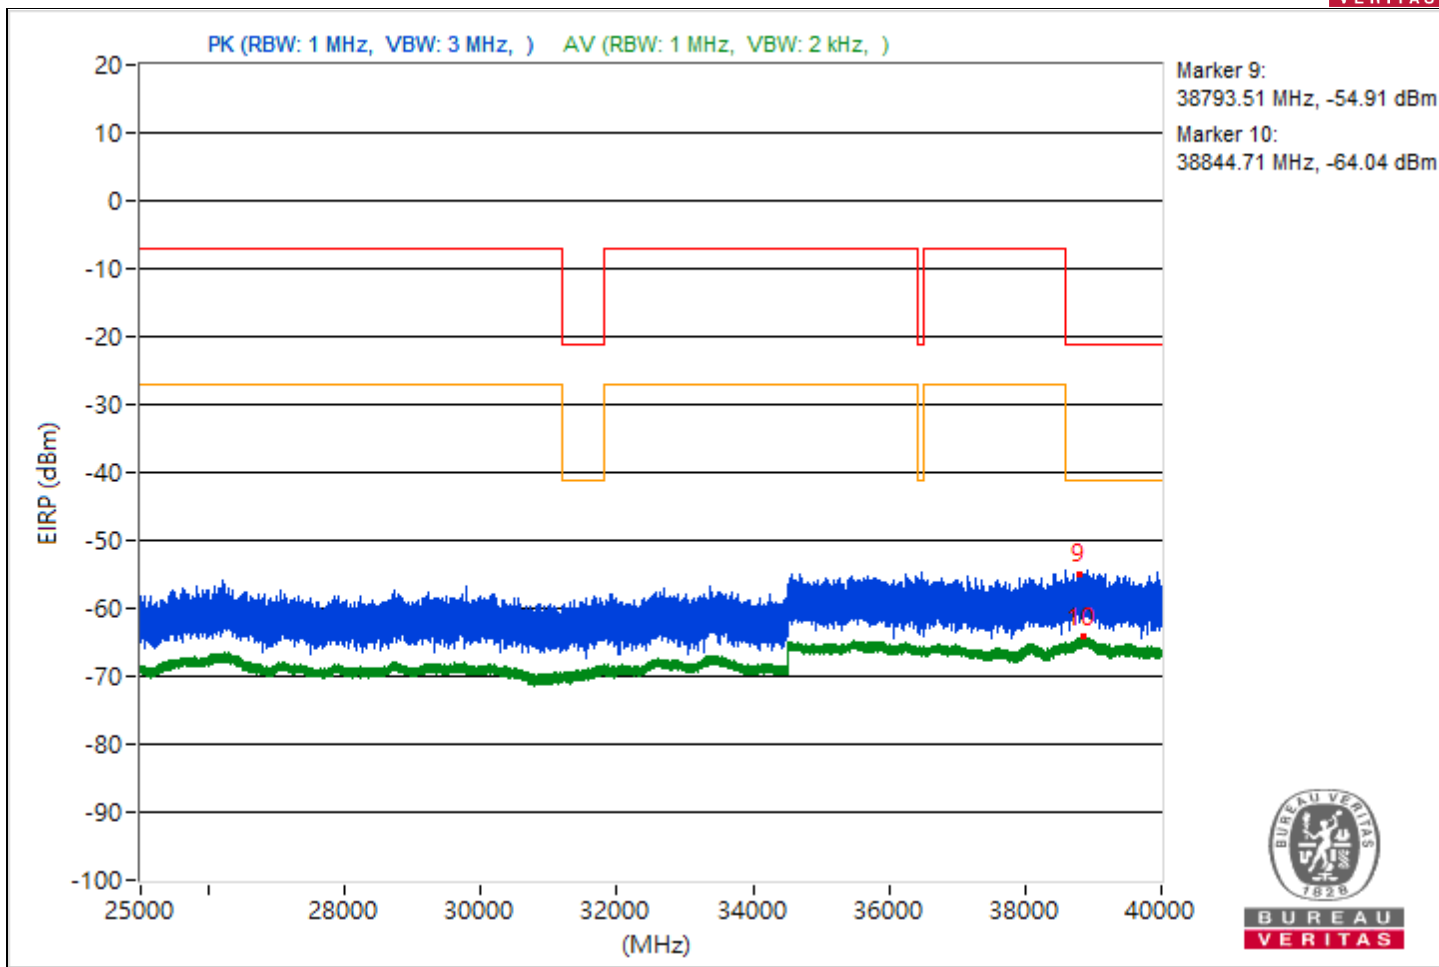





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.68	46.58 PK	74	-27.42	-58.77	-55.18	4.92	-48.68
2	3795.02	35.69 AV	54	-18.31	-66.85	-68.28	4.92	-59.57
3	11450.31	46.15 PK	74	-27.85	-60.5	-55.14	4.92	-49.11
4	7255.04	34.53 AV	54	-19.47	-67.78	-69.76	4.92	-60.73
5	18817.6	47.05 PK	74	-26.95	-59.5	-54.27	4.92	-48.21
6	21139.2	36.64 AV	54	-17.36	-66.15	-66.98	4.92	-58.62
7	22049.2	48.25 PK	74	-25.75	-57.64	-53.28	4.92	-47.01
8	23639.9	37.9 AV	54	-16.1	-64.55	-66.2	4.92	-57.36
9	39083.56	40.45 PK	74	-33.55	-61.13	-65.35	4.92	-54.81
10	38865.69	31.06 AV	54	-22.94	-71.47	-72.91	4.92	-64.2

Note: Margin value = Emission Level - Limit value

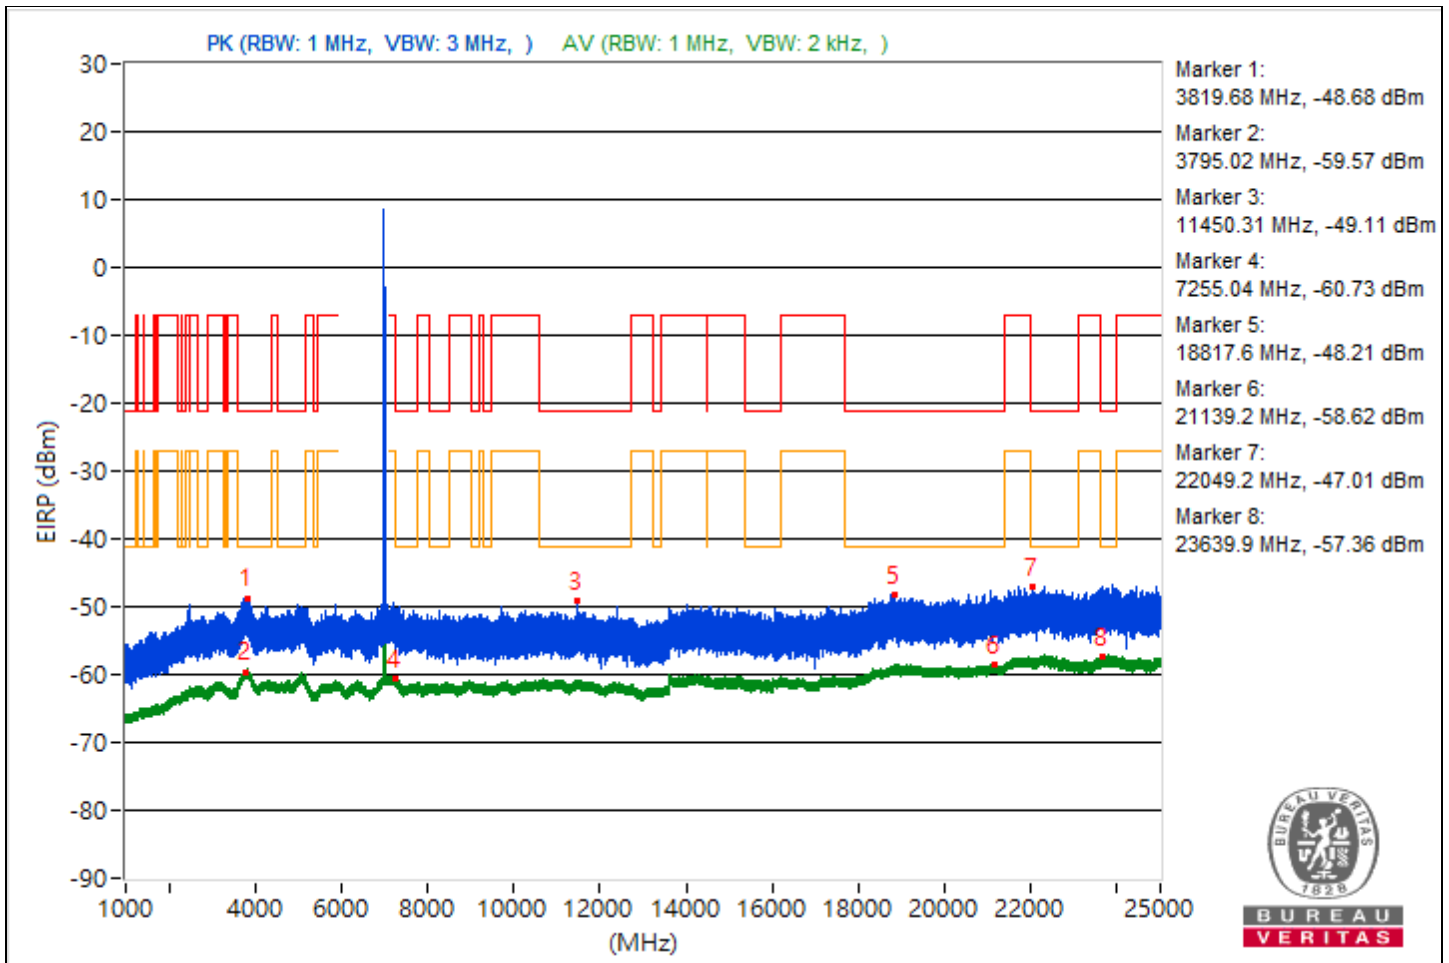

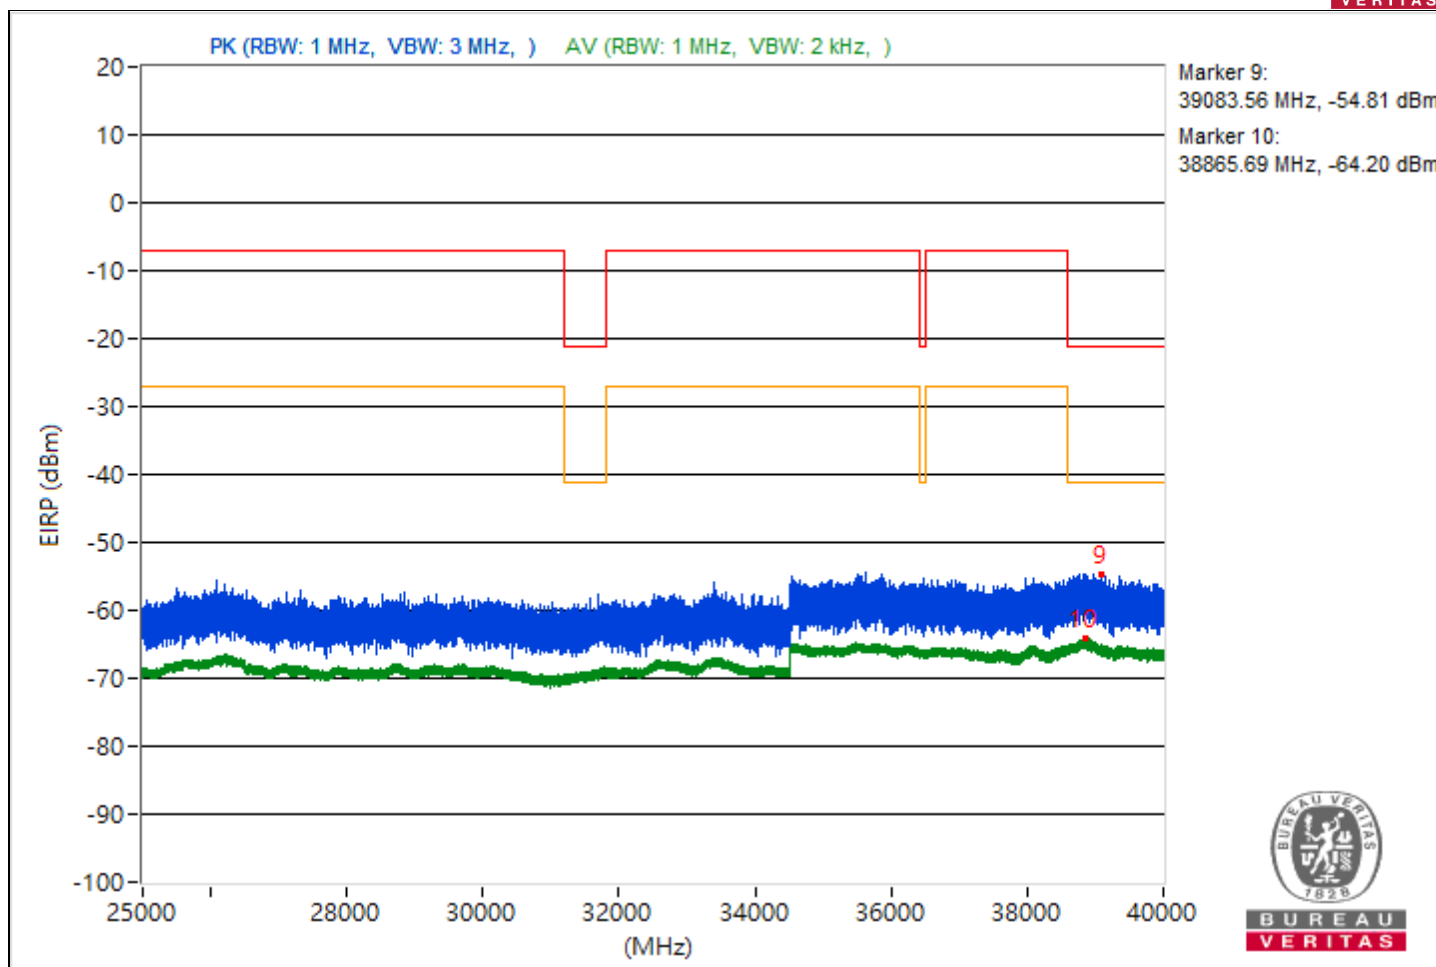





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.44	46.69 PK	74	-27.31	-55.77	-57.39	4.92	-48.57
2	3802.18	35.81 AV	54	-18.19	-66.99	-67.81	4.92	-59.45
3	7253.88	45.42 PK	74	-28.58	-55.76	-61.65	4.92	-49.84
4	7252.71	34.94 AV	54	-19.06	-67.52	-69.12	4.92	-60.32
5	20307.9	47.02 PK	74	-26.98	-59.09	-54.44	4.92	-48.24
6	21111.7	36.84 AV	54	-17.16	-66.8	-65.93	4.92	-58.42
7	22176.1	48.05 PK	74	-25.95	-54.03	-56.65	4.92	-47.21
8	23634.3	37.89 AV	54	-16.11	-65.94	-64.73	4.92	-57.37
9	38831.56	41.32 PK	74	-32.68	-65.95	-59.81	4.92	-53.94
10	38839.2	30.88 AV	54	-23.12	-72.97	-71.74	4.92	-64.38

Note: Margin value = Emission Level - Limit value

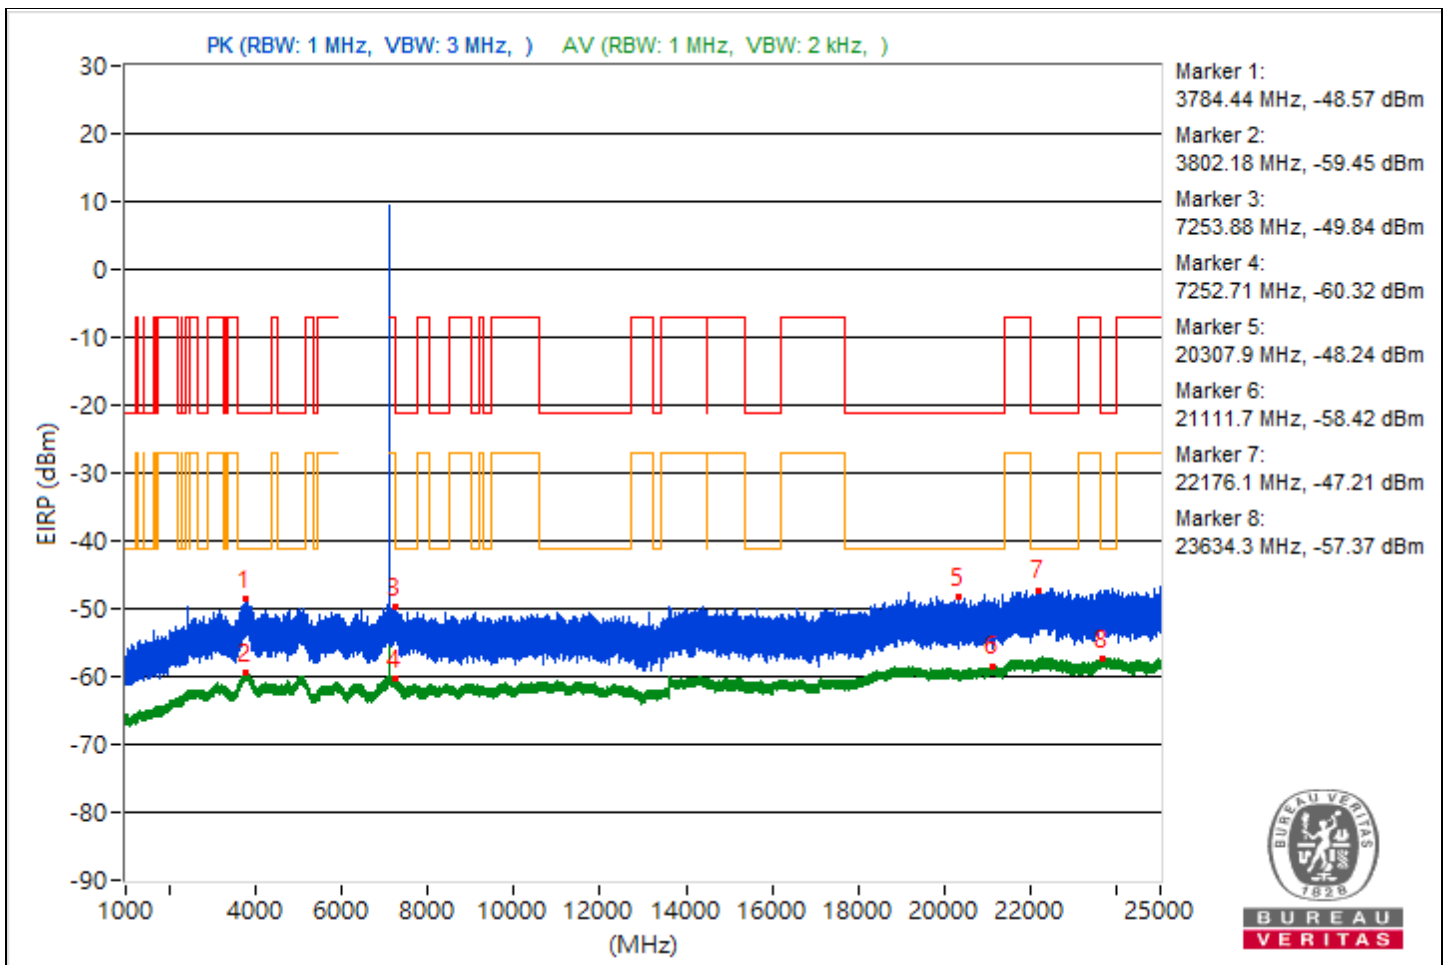

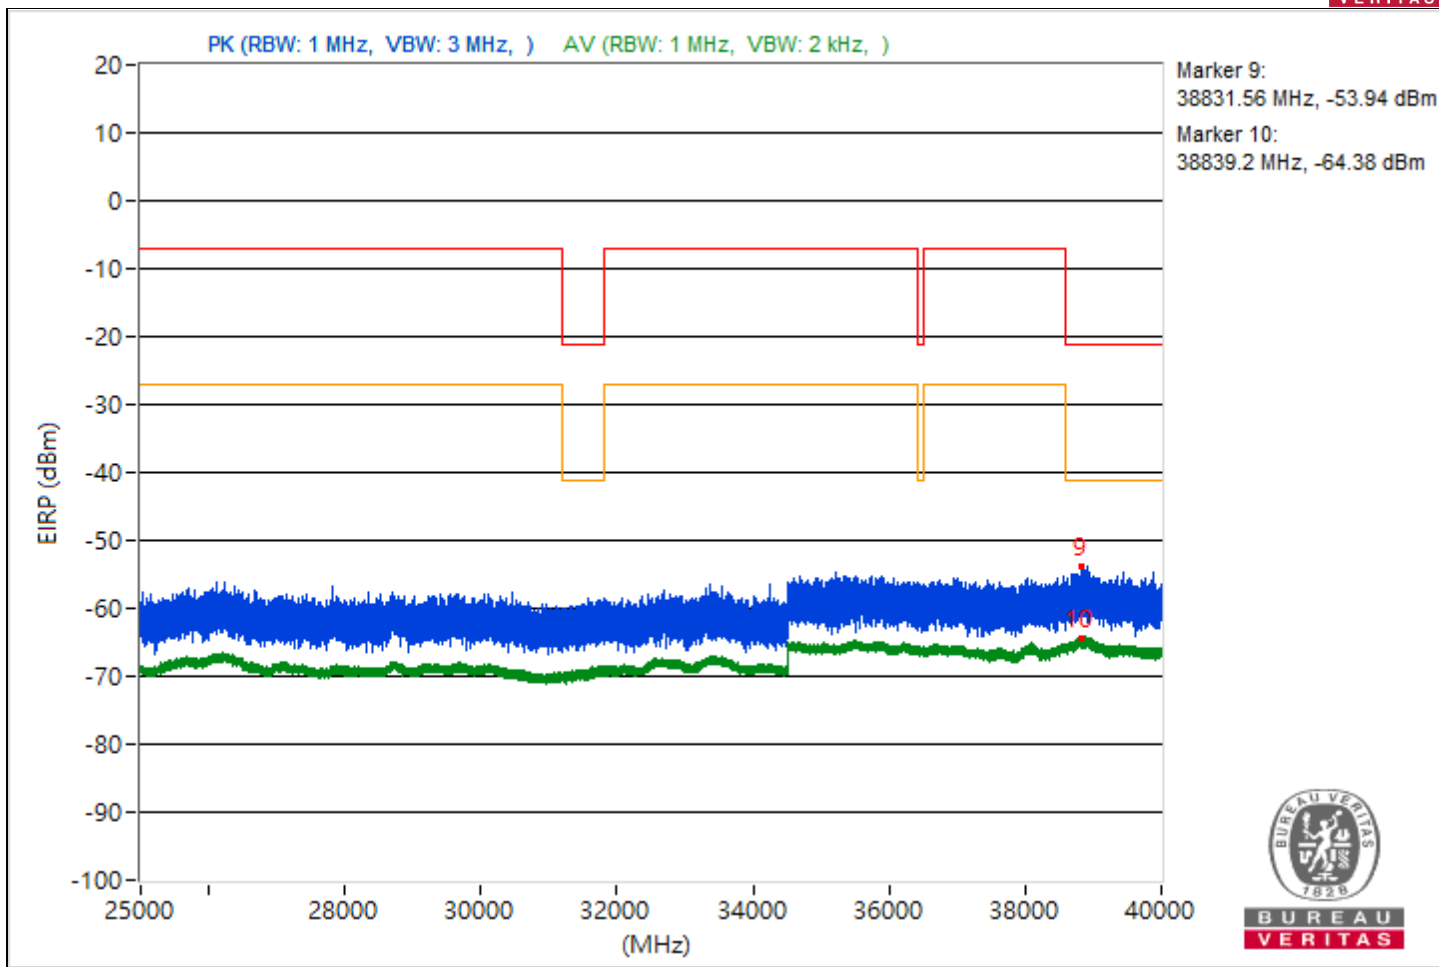





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3764.53	46.54 PK	74	-27.46	-58.79	-55.22	4.92	-48.72
2	3768.5	35.89 AV	54	-18.11	-67.8	-66.85	4.92	-59.37
3	14489.96	45.81 PK	74	-28.19	-55.49	-60.82	4.92	-49.45
4	14477.69	35.14 AV	54	-18.86	-68.19	-67.92	4.92	-60.12
5	20978.6	47.02 PK	74	-26.98	-60.42	-54.06	4.92	-48.24
6	21203.3	36.68 AV	54	-17.32	-66.03	-67.05	4.92	-58.58
7	23084	48.04 PK	74	-25.96	-52.96	-59.78	4.92	-47.22
8	23674.7	37.72 AV	54	-16.28	-64.81	-66.25	4.92	-57.54
9	38974.58	40.95 PK	74	-33.05	-60.9	-64.18	4.92	-54.31
10	38909.78	31.15 AV	54	-22.85	-72.49	-71.64	4.92	-64.11

Note: Margin value = Emission Level - Limit value

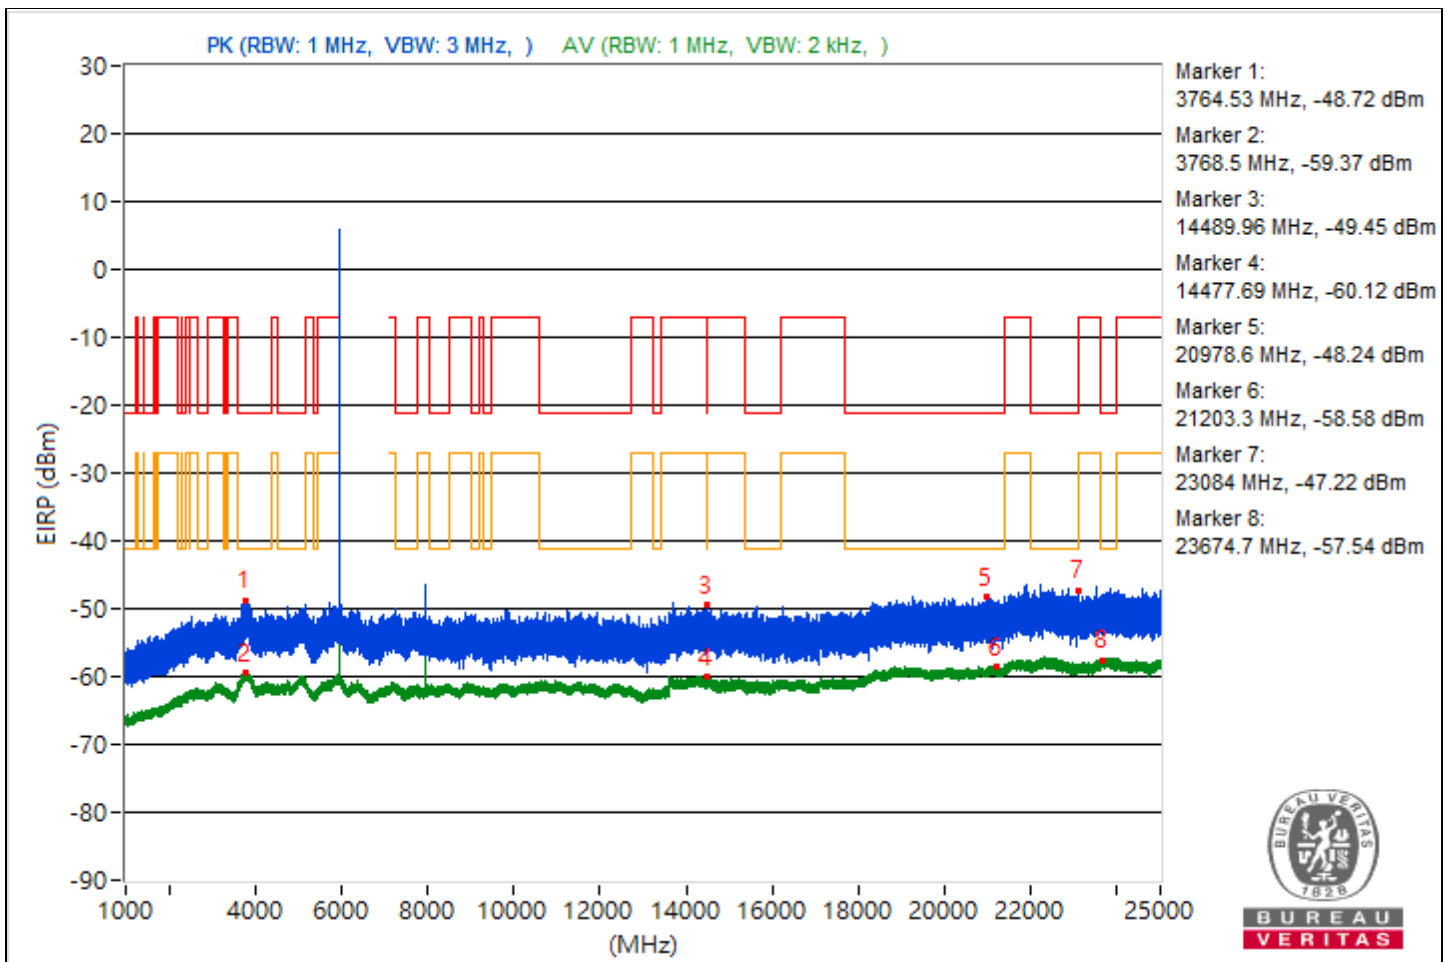

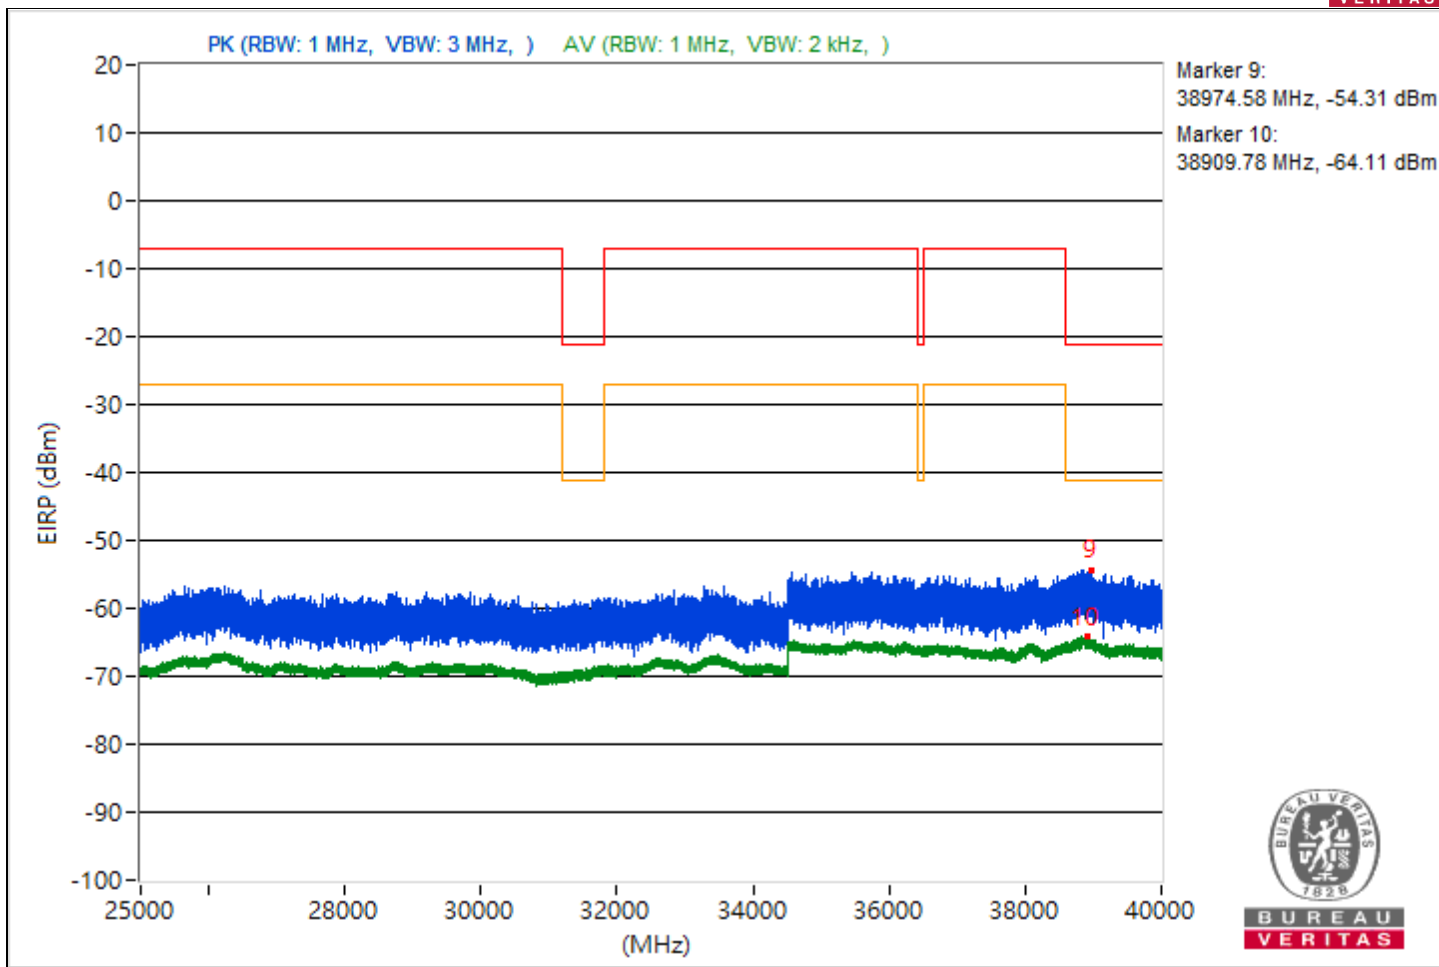





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.57	46.02 PK	74	-27.98	-59.64	-55.6	4.92	-49.24
2	3786.08	36 AV	54	-18	-66.72	-67.71	4.92	-59.26
3	10731.47	45.11 PK	74	-28.89	-61.34	-56.24	4.92	-50.15
4	14470.58	34.54 AV	54	-19.46	-67.9	-69.55	4.92	-60.72
5	19277	47.47 PK	74	-26.53	-53.72	-59.51	4.92	-47.79
6	21136.6	36.5 AV	54	-17.5	-67.34	-66.14	4.92	-58.76
7	22506.6	48.66 PK	74	-25.34	-56.94	-52.99	4.92	-46.6
8	22192.6	38.02 AV	54	-15.98	-65.78	-64.63	4.92	-57.24
9	36481.33	40.65 PK	74	-33.35	-70.93	-59.85	4.92	-54.61
10	38878.76	31.14 AV	54	-22.86	-71.8	-72.31	4.92	-64.12

Note: Margin value = Emission Level - Limit value

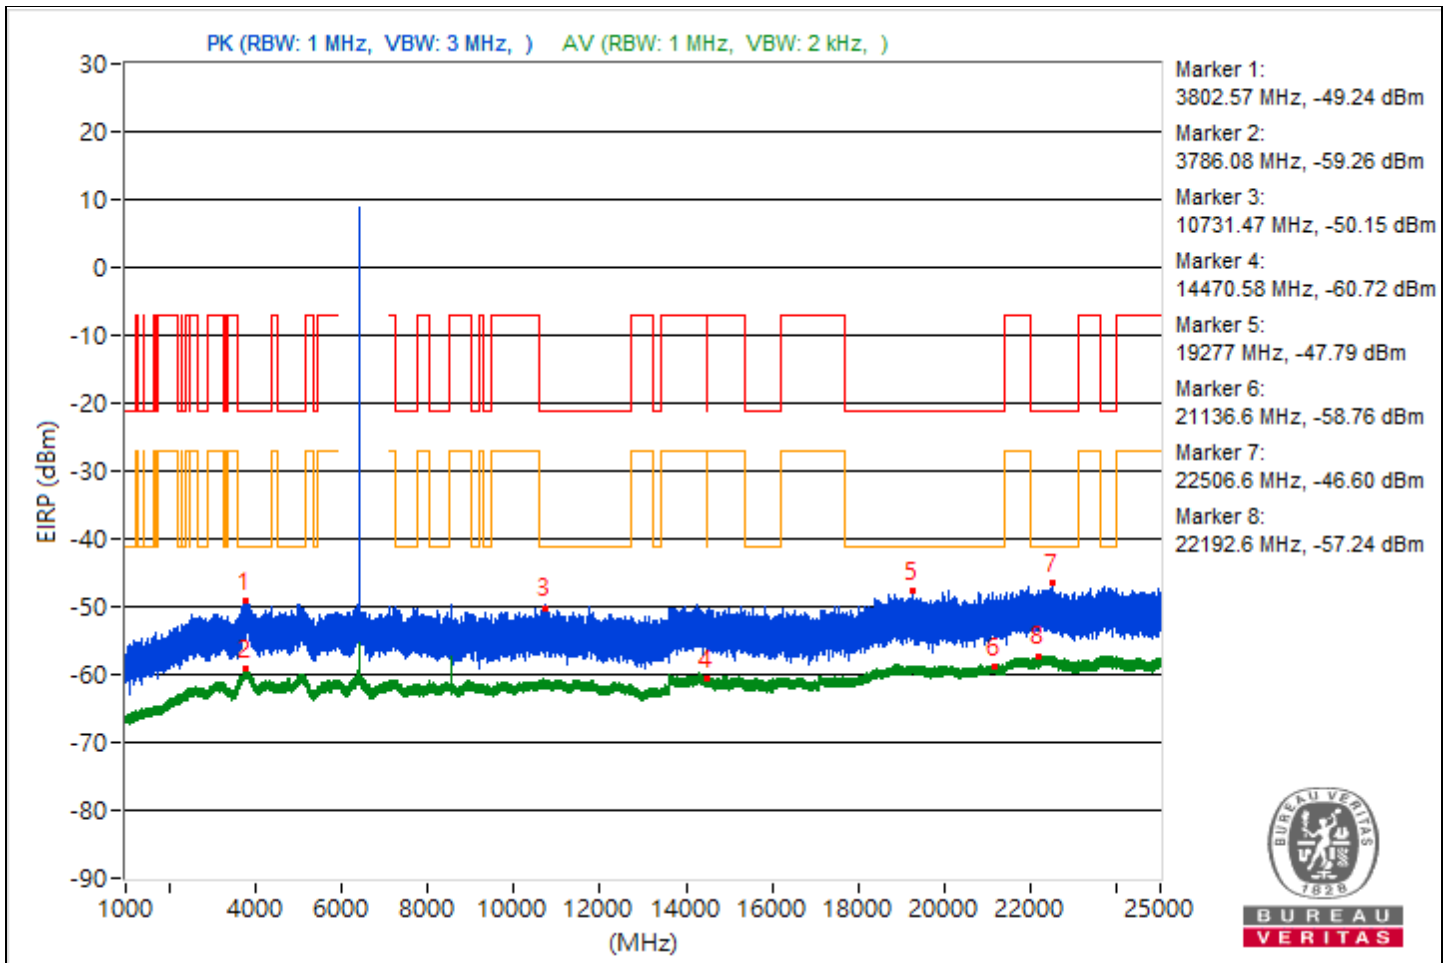

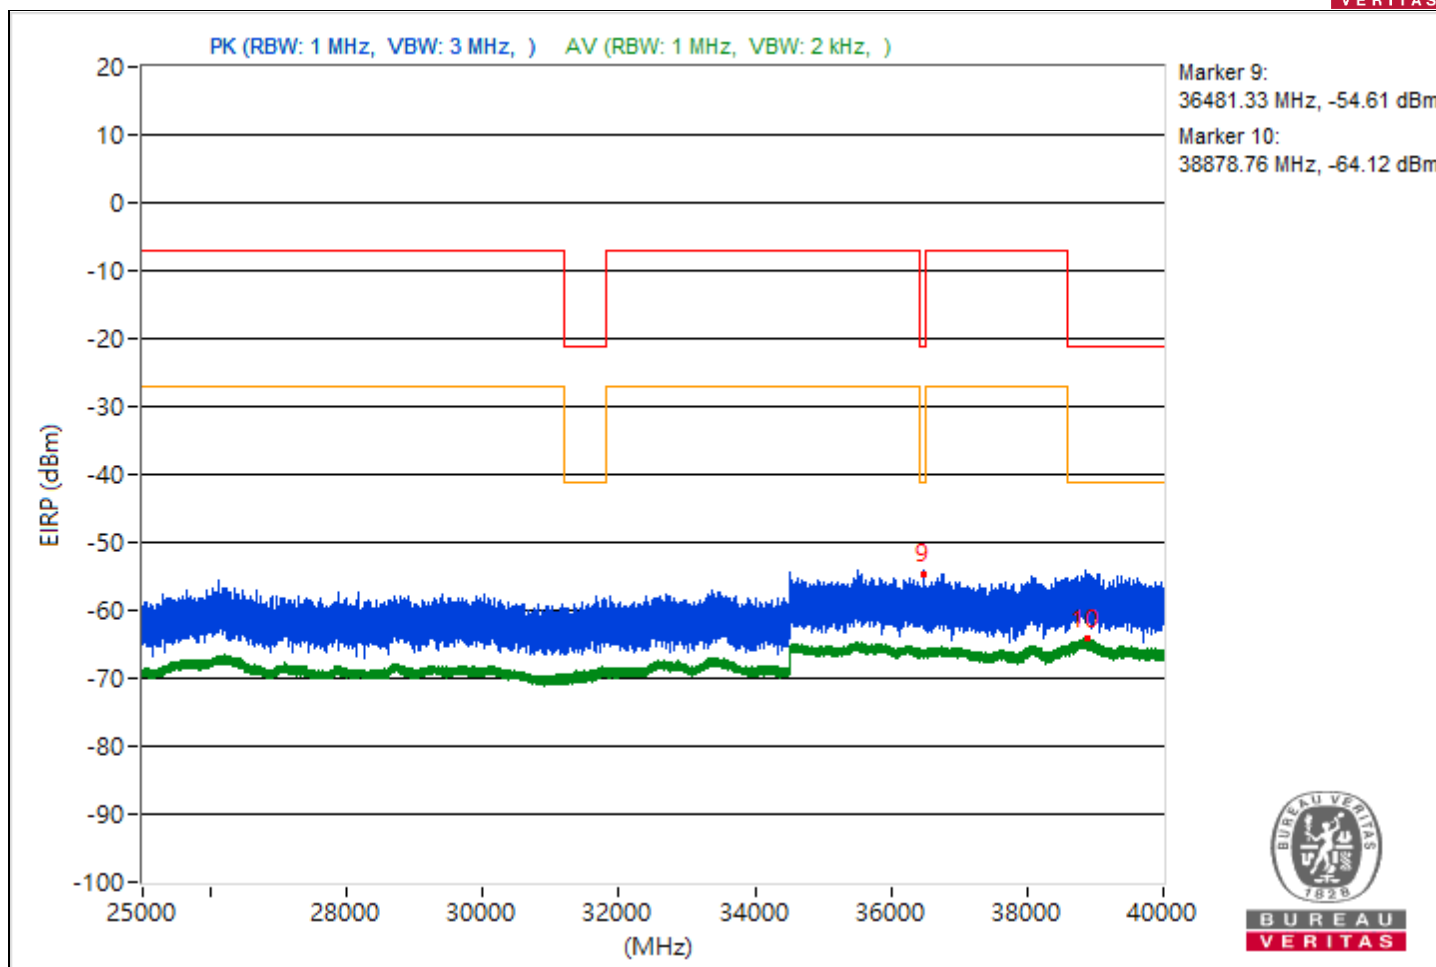





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5051.83	46.57 PK	74	-27.43	-58.94	-55.12	4.92	-48.69
2	3824.42	35.92 AV	54	-18.08	-67.05	-67.51	4.92	-59.34
3	14491.64	44.8 PK	74	-29.2	-61.26	-56.67	4.92	-50.46
4	14485.51	35.12 AV	54	-18.88	-67.93	-68.23	4.92	-60.14
5	20896.4	46.93 PK	74	-27.07	-54.18	-60.4	4.92	-48.33
6	21111.9	36.64 AV	54	-17.36	-67.07	-66.08	4.92	-58.62
7	23977.7	48.37 PK	74	-25.63	-53.56	-56.59	4.92	-46.89
8	23621.7	37.76 AV	54	-16.24	-64.86	-66.09	4.92	-57.5
9	38938.76	40.29 PK	74	-33.71	-66.01	-61.1	4.92	-54.97
10	38972.53	30.71 AV	54	-23.29	-71.81	-73.29	4.92	-64.55

Note: Margin value = Emission Level - Limit value

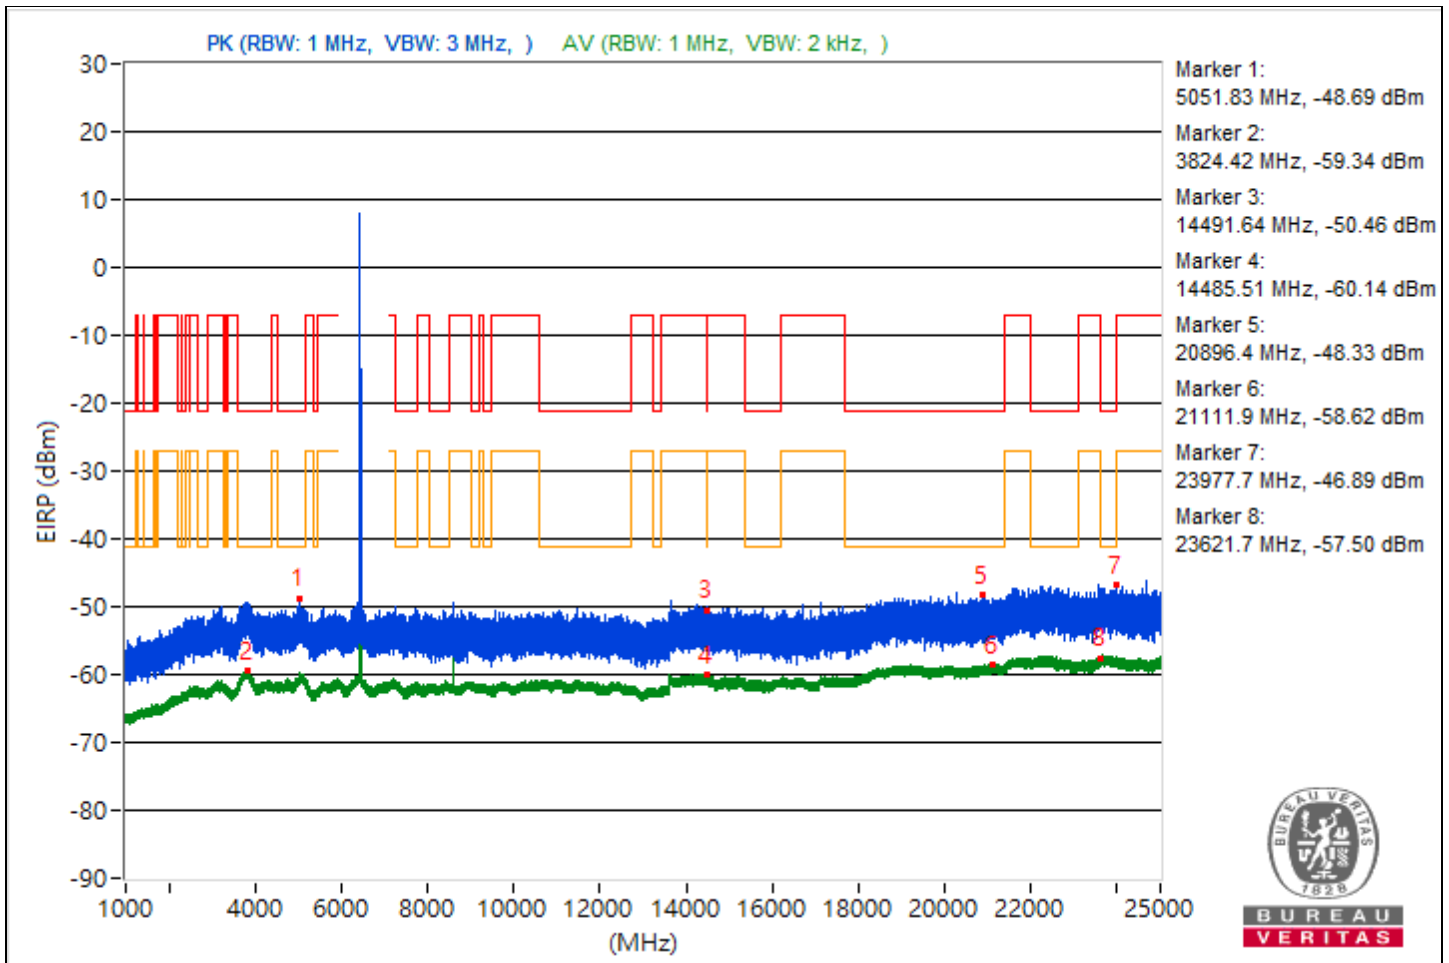

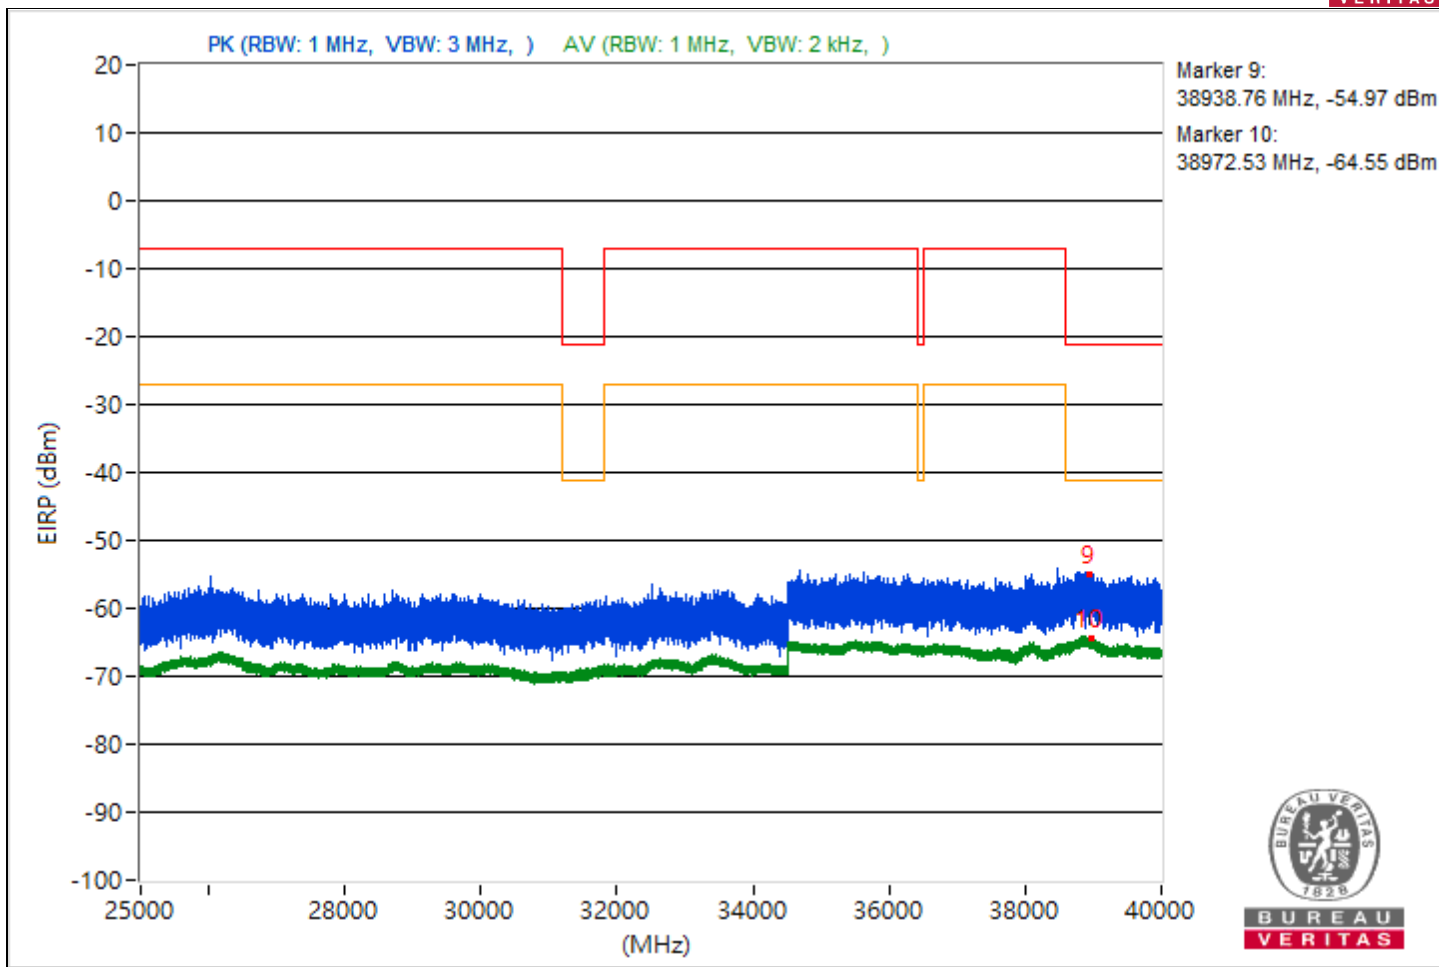





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.11	46.53 PK	74	-27.47	-59.74	-54.87	4.92	-48.73
2	3793.23	36 AV	54	-18	-66.5	-68.01	4.92	-59.26
3	7320.14	44.99 PK	74	-29.01	-57.02	-59.84	4.92	-50.27
4	14487.64	35.03 AV	54	-18.97	-68.35	-67.97	4.92	-60.23
5	19276.9	46.65 PK	74	-27.35	-54.12	-62.45	4.92	-48.61
6	21132.1	36.57 AV	54	-17.43	-66.06	-67.26	4.92	-58.69
7	23718.2	48.62 PK	74	-25.38	-52.64	-58.12	4.92	-46.64
8	22210.8	37.99 AV	54	-16.01	-65.84	-64.64	4.92	-57.27
9	39402.76	40.75 PK	74	-33.25	-66.1	-60.48	4.92	-54.51
10	38842.31	30.9 AV	54	-23.1	-71.59	-73.13	4.92	-64.36

Note: Margin value = Emission Level - Limit value

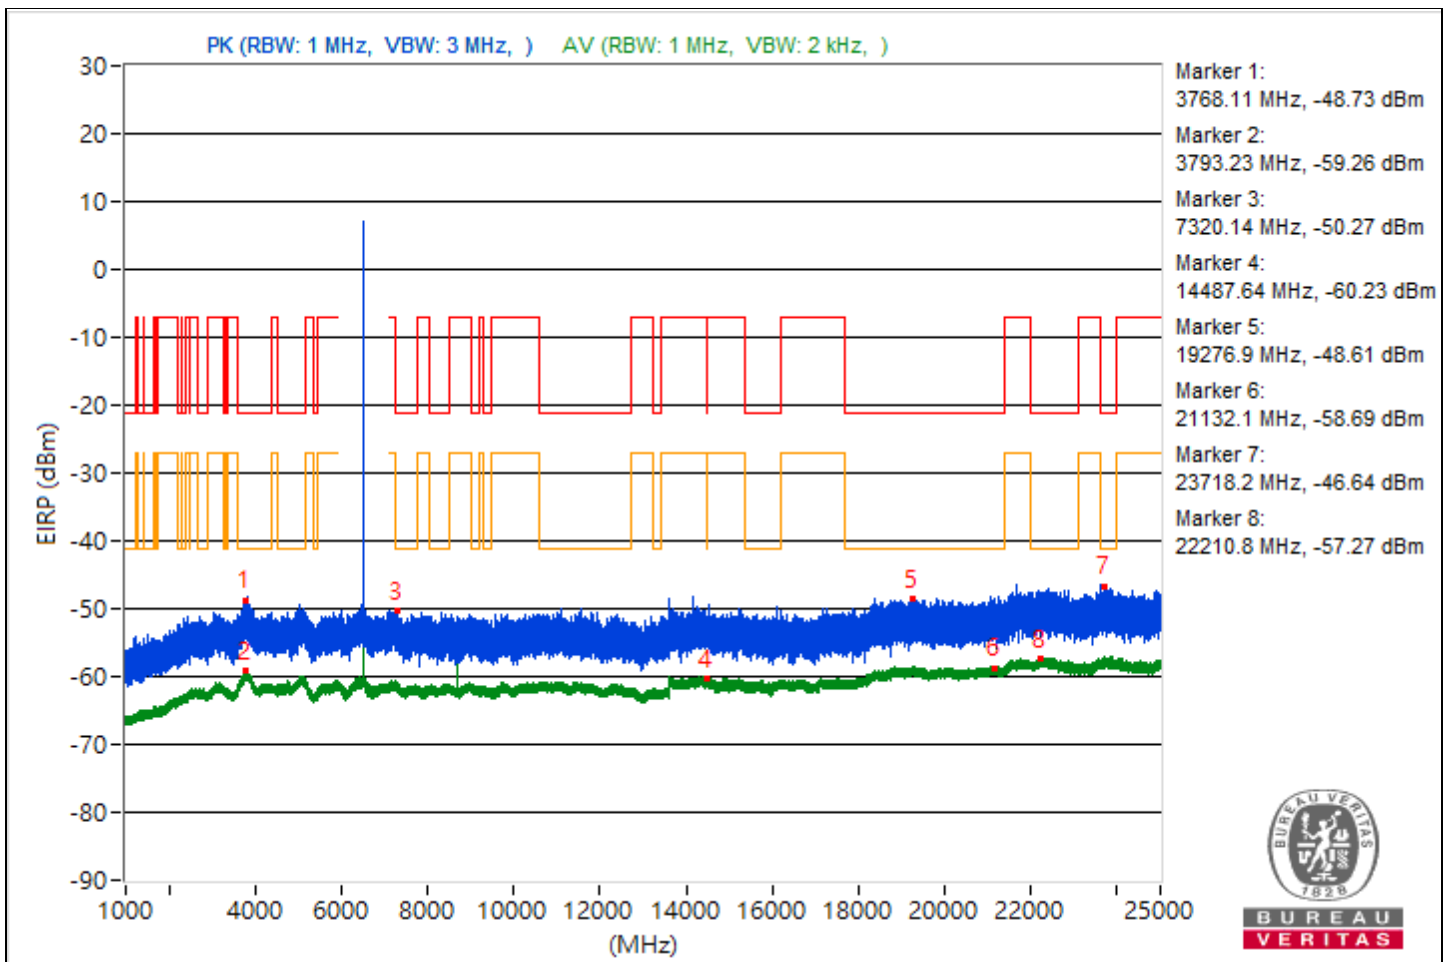

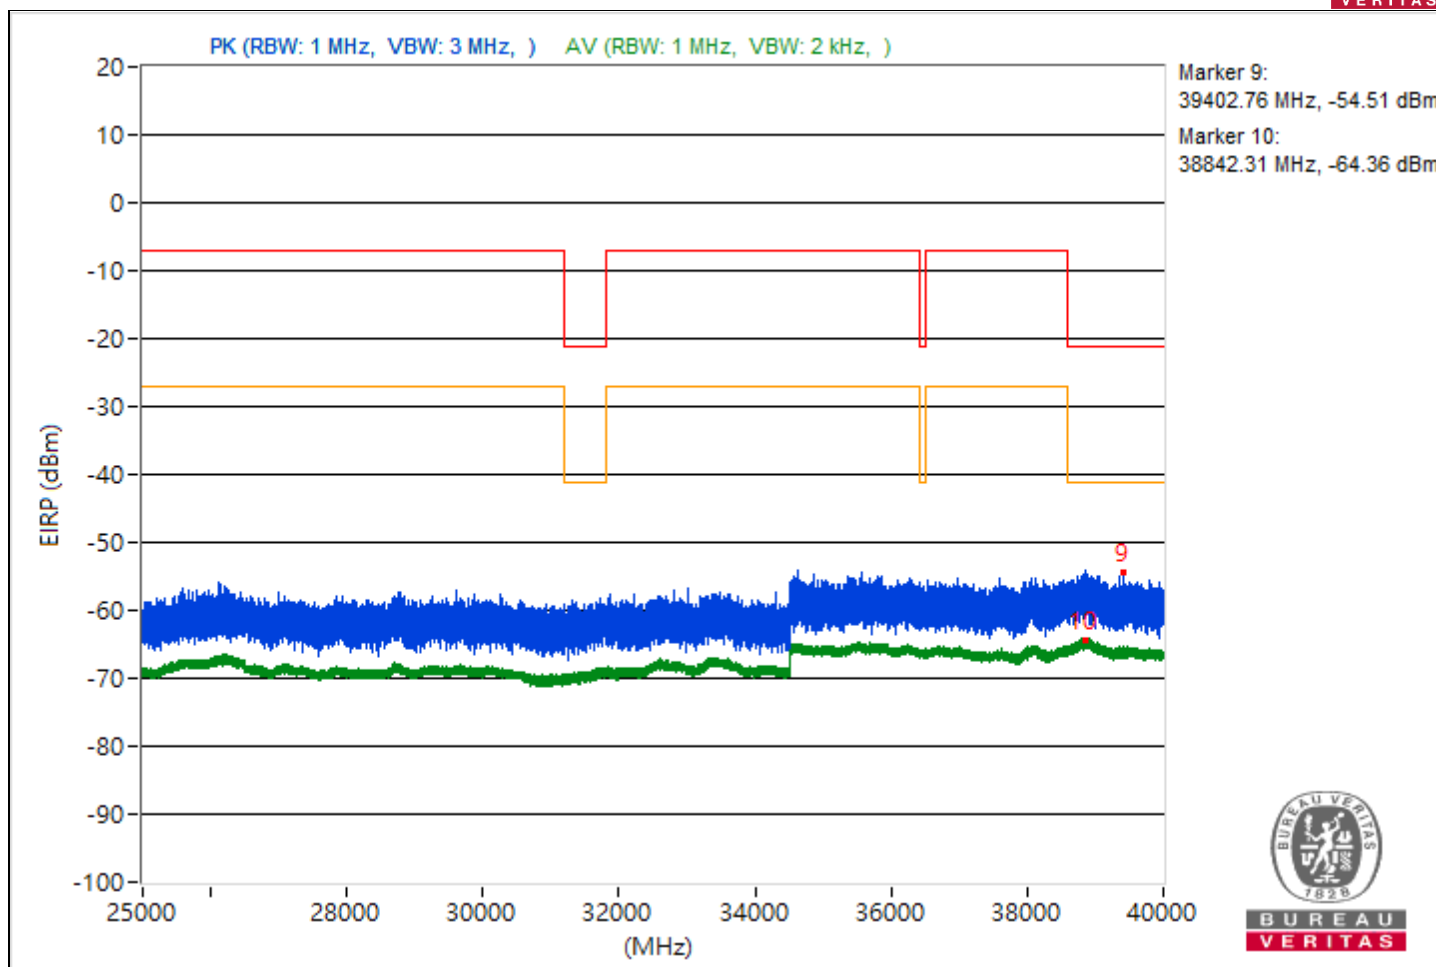





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3664.2	45.52 PK	74	-28.48	-61.87	-55.58	4.92	-49.74
2	3793.23	35.9 AV	54	-18.1	-66.91	-67.71	4.92	-59.36
3	10642.31	45.29 PK	74	-28.71	-56.04	-61.23	4.92	-49.97
4	14486.84	34.94 AV	54	-19.06	-67.89	-68.63	4.92	-60.32
5	21056.2	47.32 PK	74	-26.68	-58.43	-54.27	4.92	-47.94
6	21130	36.74 AV	54	-17.26	-66.01	-66.95	4.92	-58.52
7	22328	48.34 PK	74	-25.66	-56.72	-53.56	4.92	-46.92
8	22202	38.07 AV	54	-15.93	-65.45	-64.81	4.92	-57.19
9	38915.82	41.11 PK	74	-32.89	-61	-63.52	4.92	-54.15
10	38859.64	30.89 AV	54	-23.11	-71.63	-73.1	4.92	-64.37

Note: Margin value = Emission Level - Limit value

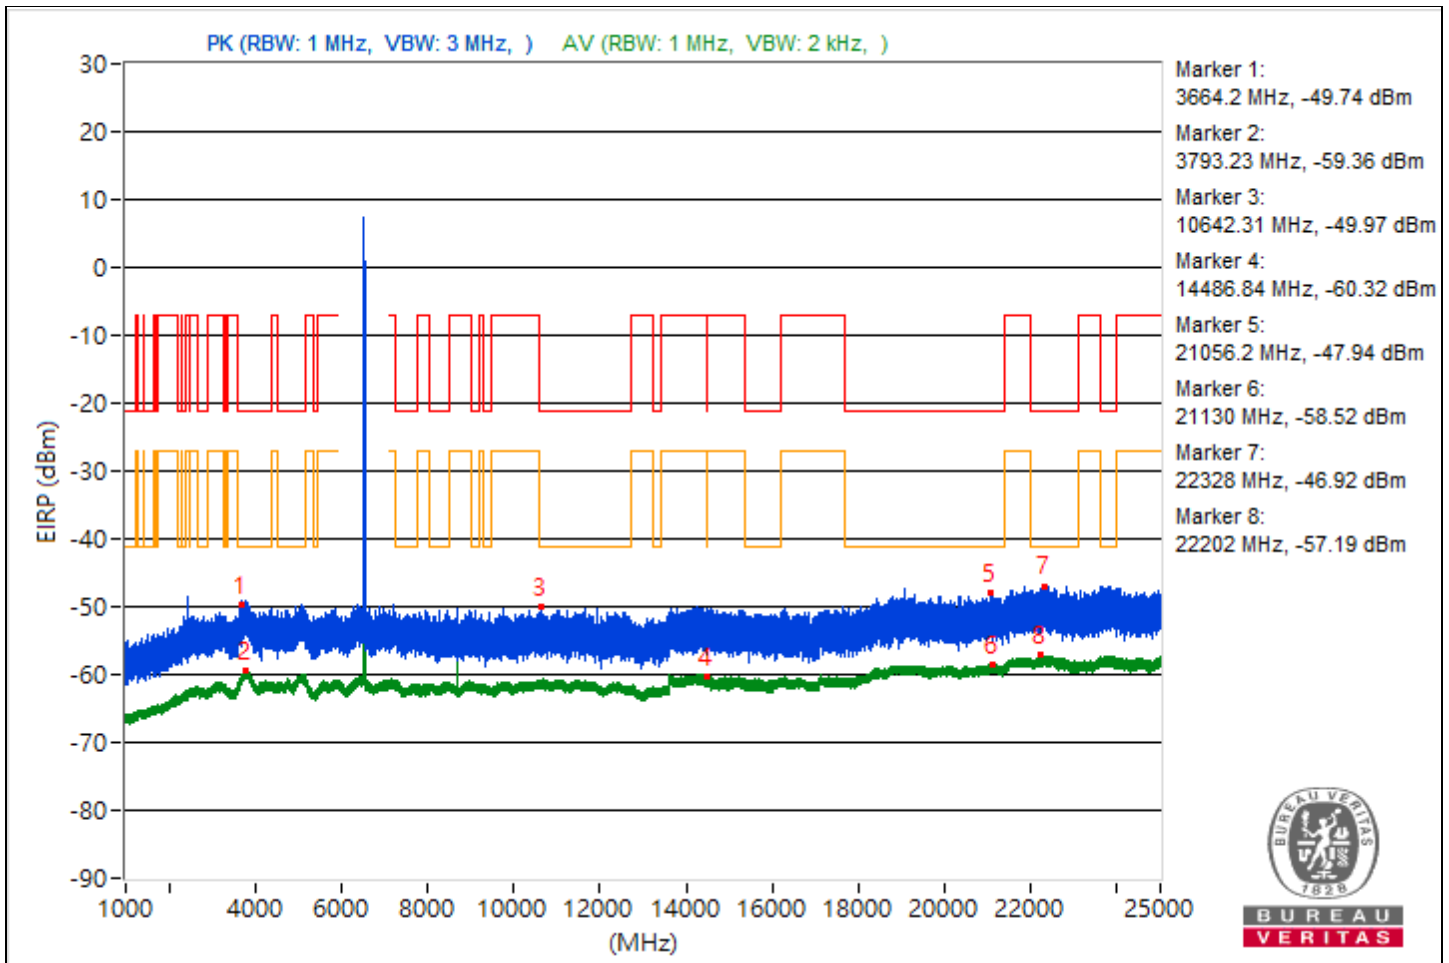

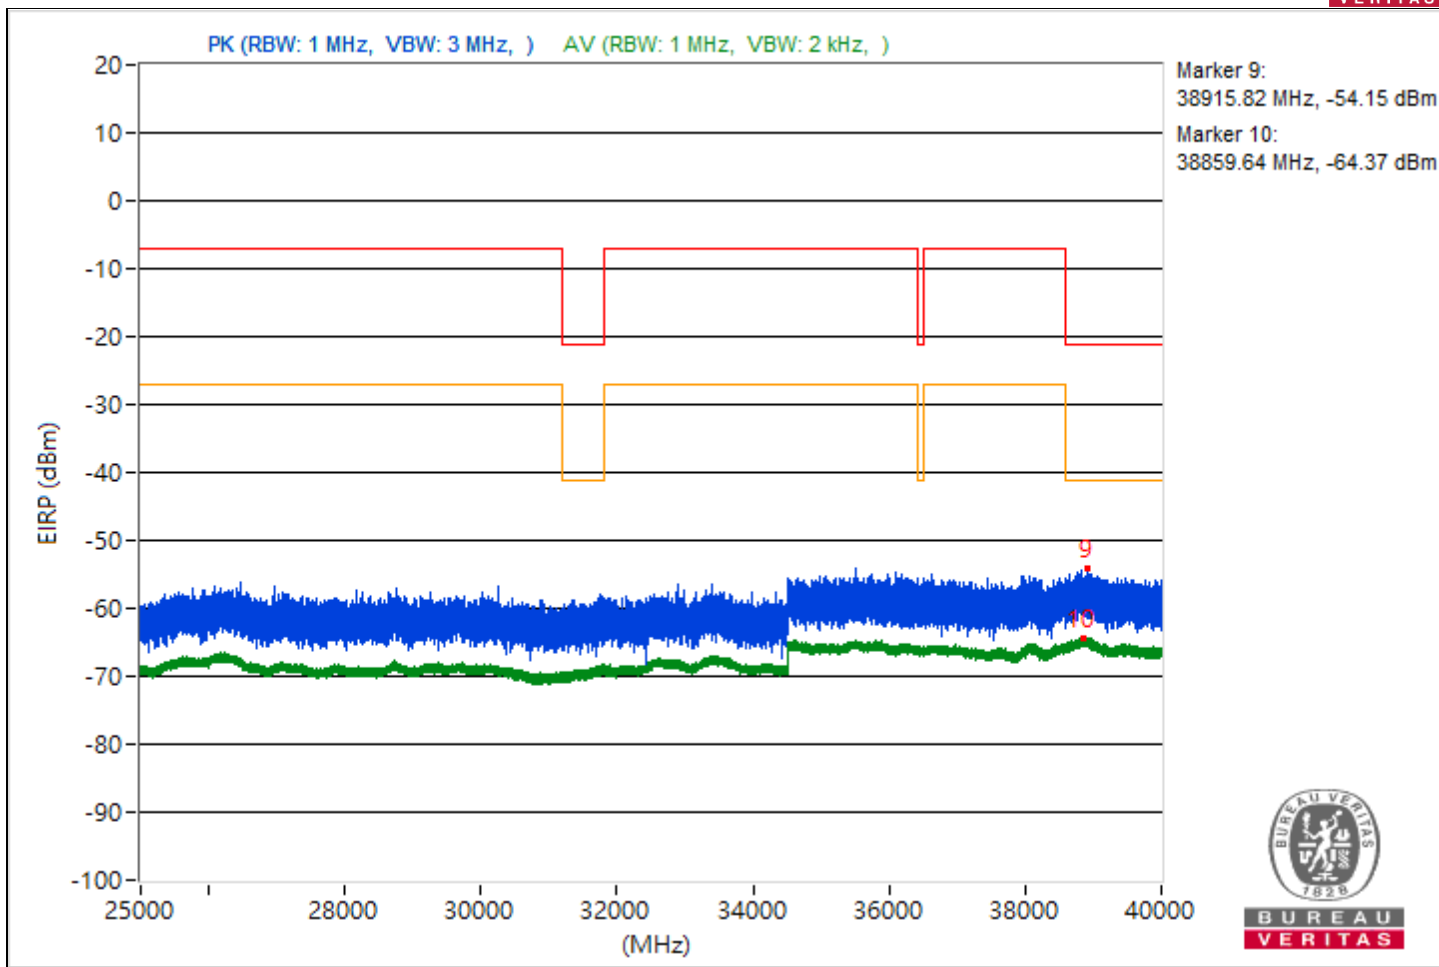





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5088	47.35 PK	74	-26.65	-54.61	-57.56	4.92	-47.91
2	3816.57	36 AV	54	-18	-66.87	-67.53	4.92	-59.26
3	7294.01	44.8 PK	74	-29.2	-61.59	-56.57	4.92	-50.46
4	9166.76	35.16 AV	54	-18.84	-68.57	-67.55	4.92	-60.1
5	21334.7	47.37 PK	74	-26.63	-54.8	-57.16	4.92	-47.89
6	21173.9	36.78 AV	54	-17.22	-65.99	-66.87	4.92	-58.48
7	22575	48.19 PK	74	-25.81	-57.18	-53.55	4.92	-47.07
8	22336.4	37.93 AV	54	-16.07	-64.83	-65.75	4.92	-57.33
9	38703.91	41.33 PK	74	-32.67	-64.57	-60.2	4.92	-53.93
10	38898.22	31.09 AV	54	-22.91	-71.74	-72.5	4.92	-64.17

Note: Margin value = Emission Level - Limit value

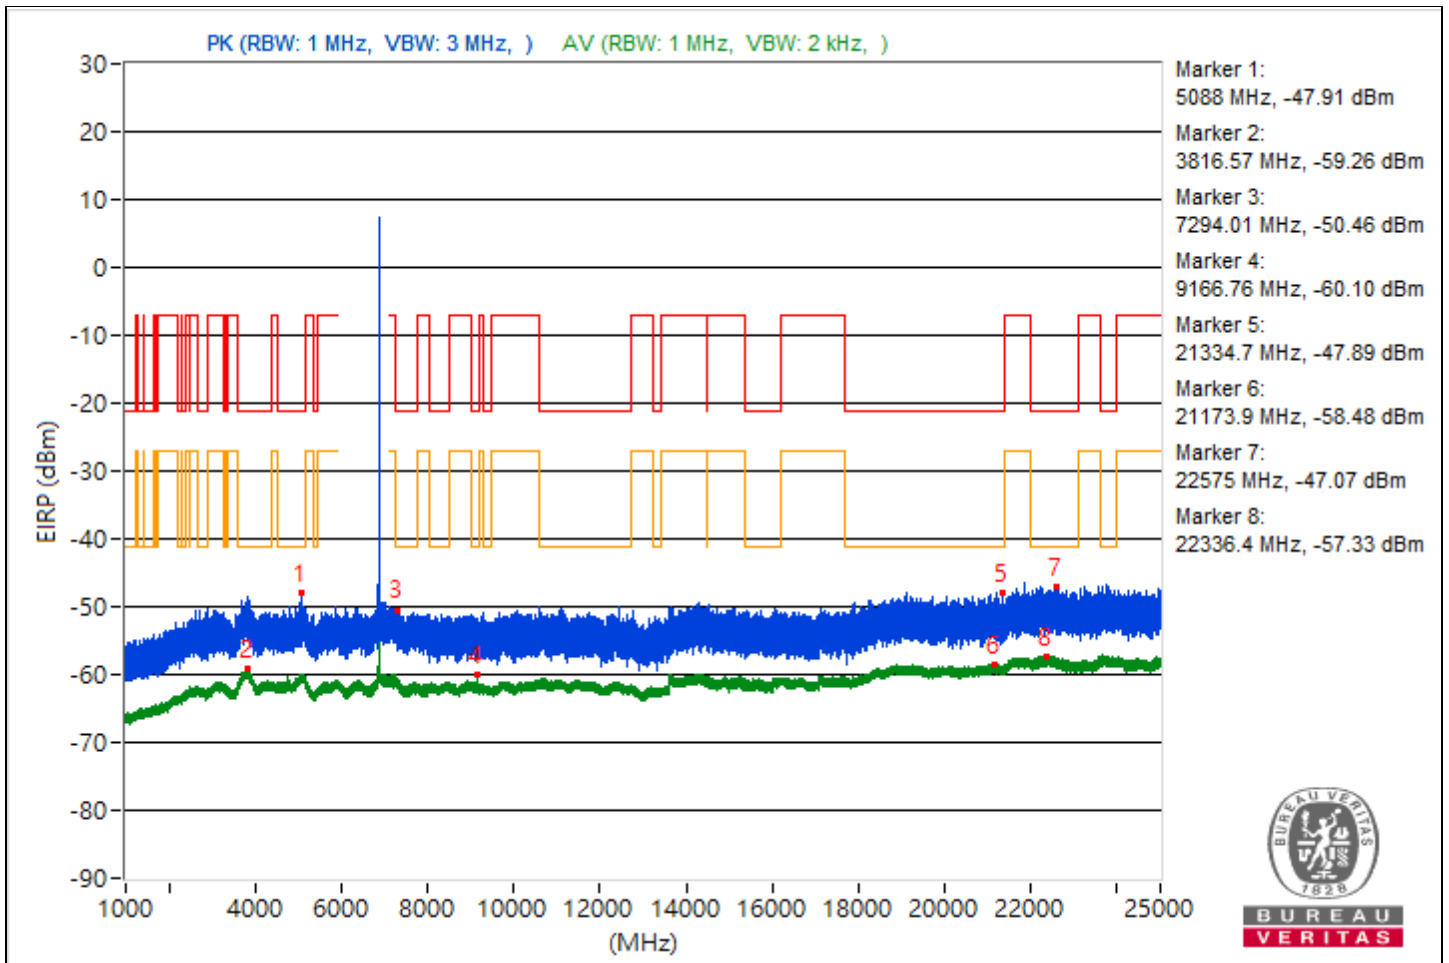

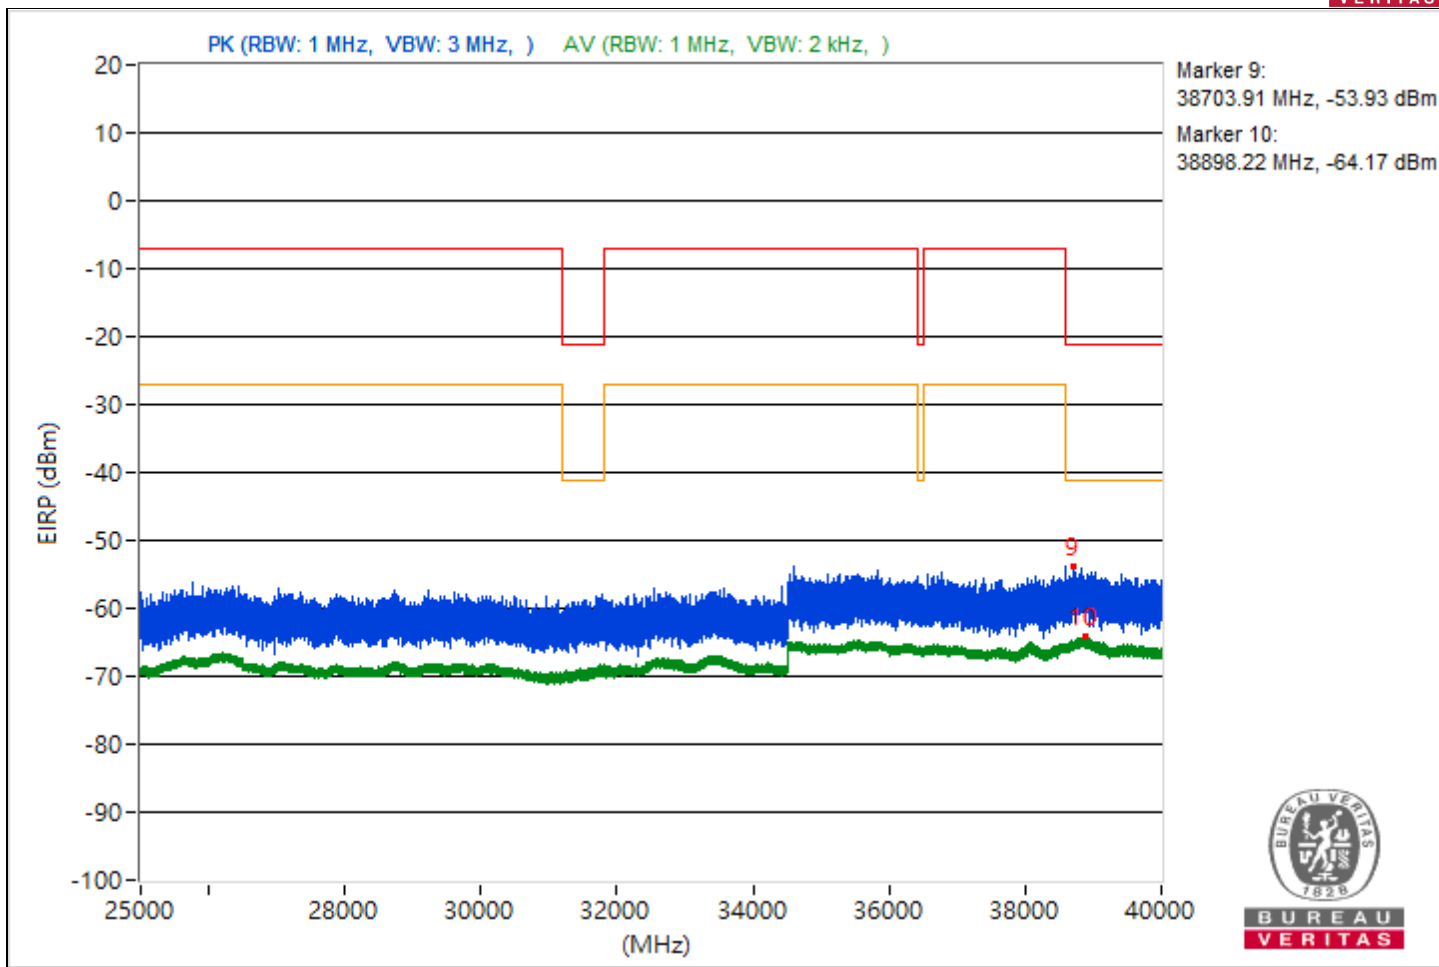





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.7	46.66 PK	74	-27.34	-58.01	-55.43	4.92	-48.6
2	3798.6	35.85 AV	54	-18.15	-67.87	-66.86	4.92	-59.41
3	10647.47	45.56 PK	74	-28.44	-58.97	-56.61	4.92	-49.7
4	7302.72	34.81 AV	54	-19.19	-69.01	-67.82	4.92	-60.45
5	19806.1	47.72 PK	74	-26.28	-53.79	-58.24	4.92	-47.54
6	21125.8	36.66 AV	54	-17.34	-66.03	-67.09	4.92	-58.6
7	23654.4	48.25 PK	74	-25.75	-60.03	-52.66	4.92	-47.01
8	23857.1	37.87 AV	54	-16.13	-66.28	-64.53	4.92	-57.39
9	39006.04	41.1 PK	74	-32.9	-65.26	-60.28	4.92	-54.16
10	38857.16	31.3 AV	54	-22.7	-72.17	-71.62	4.92	-63.96

Note: Margin value = Emission Level - Limit value

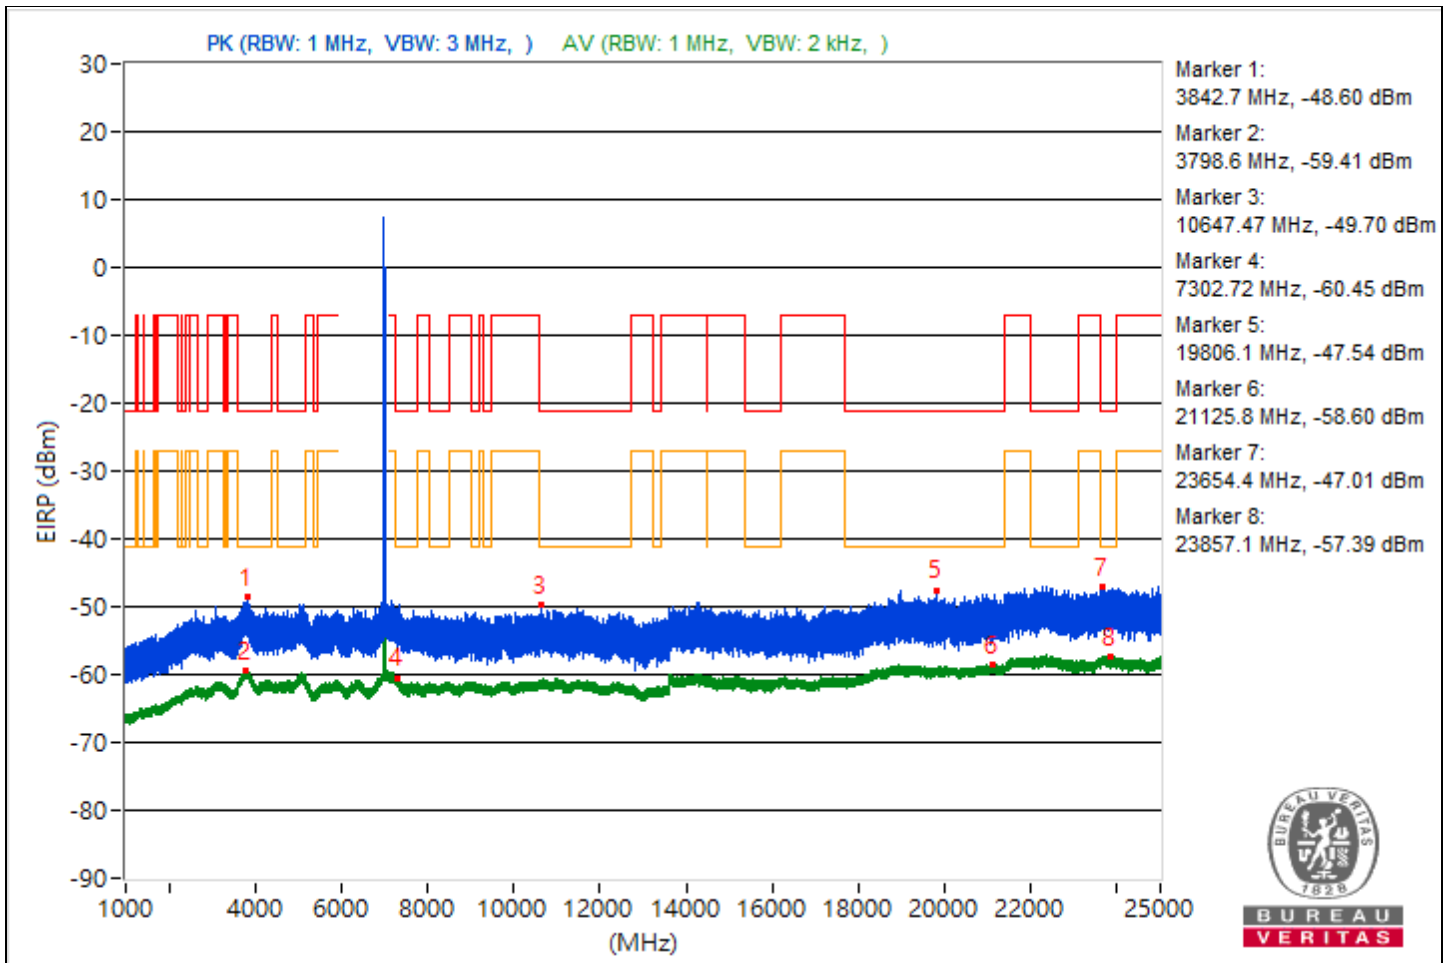

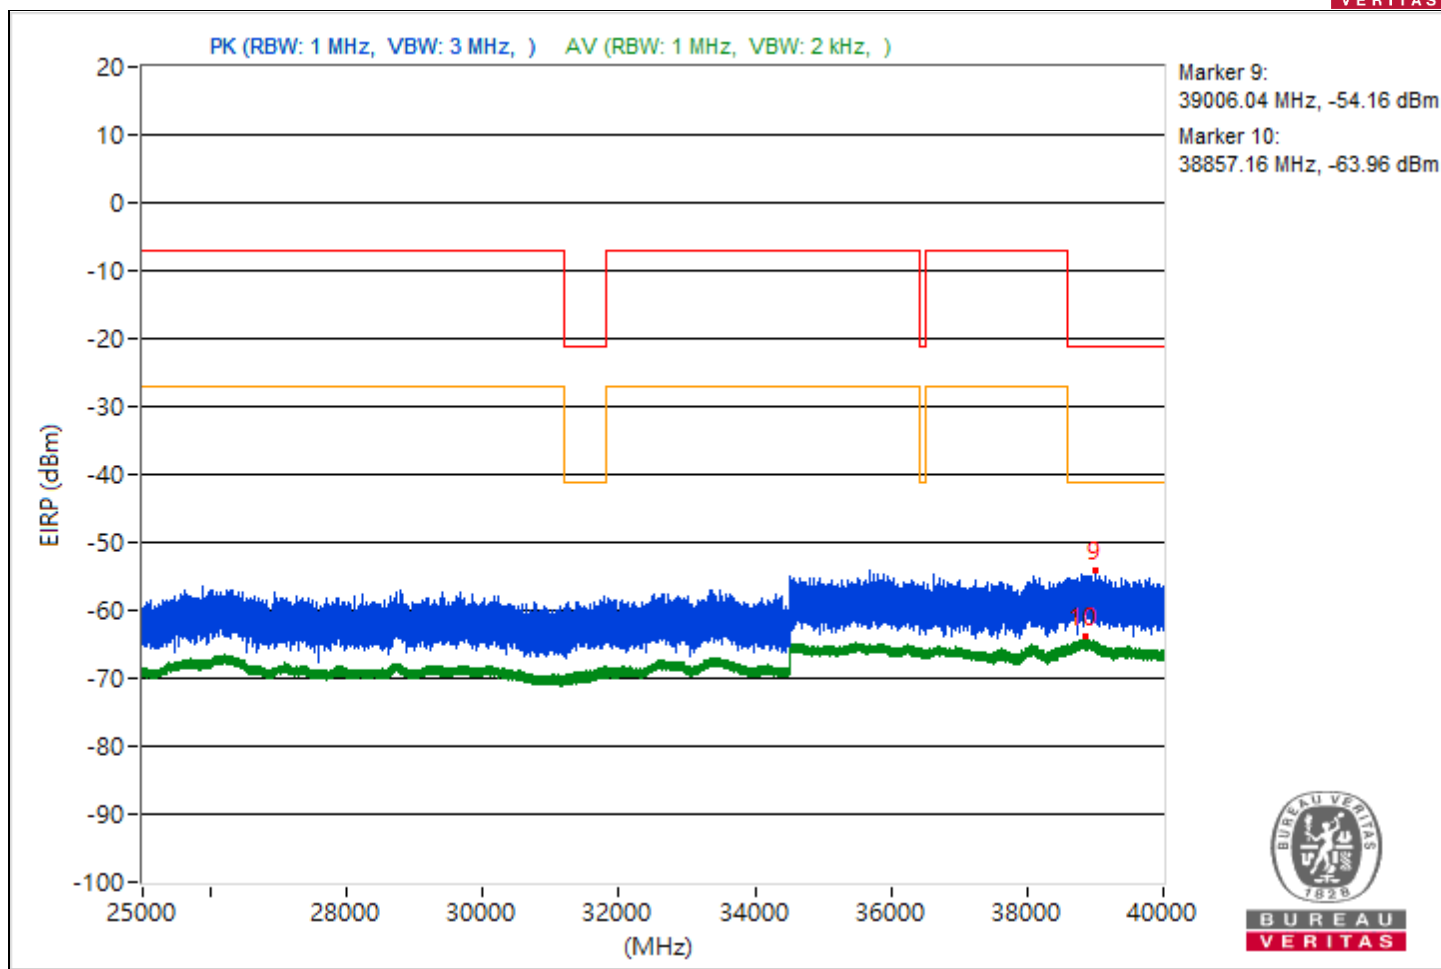





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.49	46.04 PK	74	-27.96	-55.03	-61.43	4.92	-49.22
2	3841.46	35.85 AV	54	-18.15	-68.31	-66.55	4.92	-59.41
3	10828.98	44.98 PK	74	-29.02	-64.25	-55.78	4.92	-50.28
4	7251.16	35.59 AV	54	-18.41	-68.05	-67.2	4.92	-59.67
5	21150.7	47.32 PK	74	-26.68	-60.61	-53.66	4.92	-47.94
6	21374.6	36.9 AV	54	-17.1	-66.55	-66.06	4.92	-58.36
7	22533.1	48.26 PK	74	-25.74	-58.02	-53.14	4.92	-47
8	23633.3	37.97 AV	54	-16.03	-64.72	-65.8	4.92	-57.29
9	38969.6	41.38 PK	74	-32.62	-65.87	-59.75	4.92	-53.88
10	38839.82	31.24 AV	54	-22.76	-71.48	-72.48	4.92	-64.02

Note: Margin value = Emission Level - Limit value

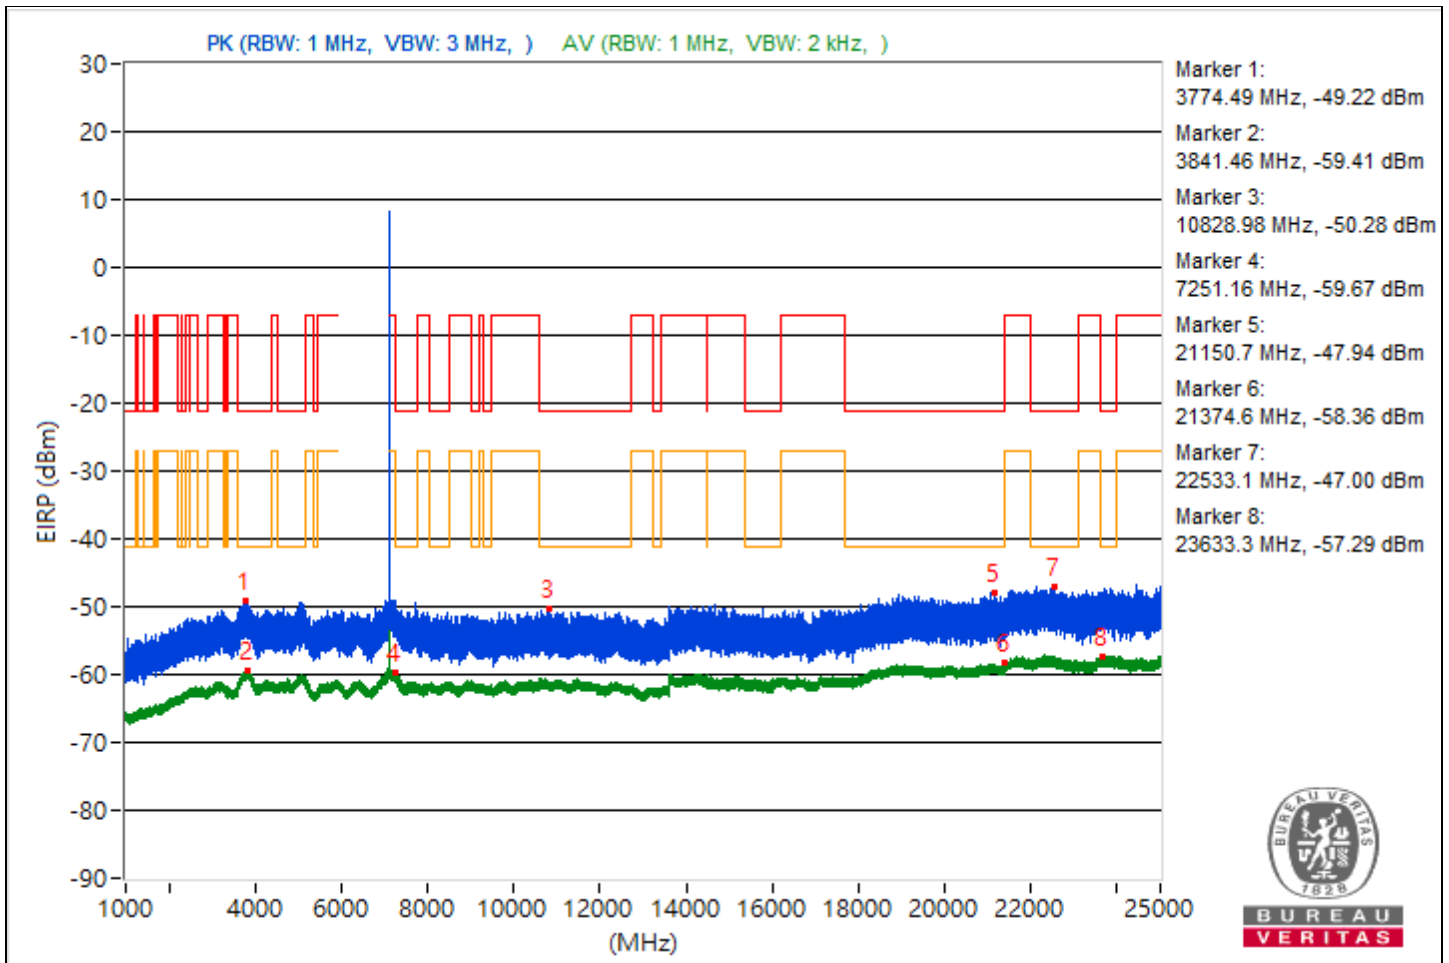


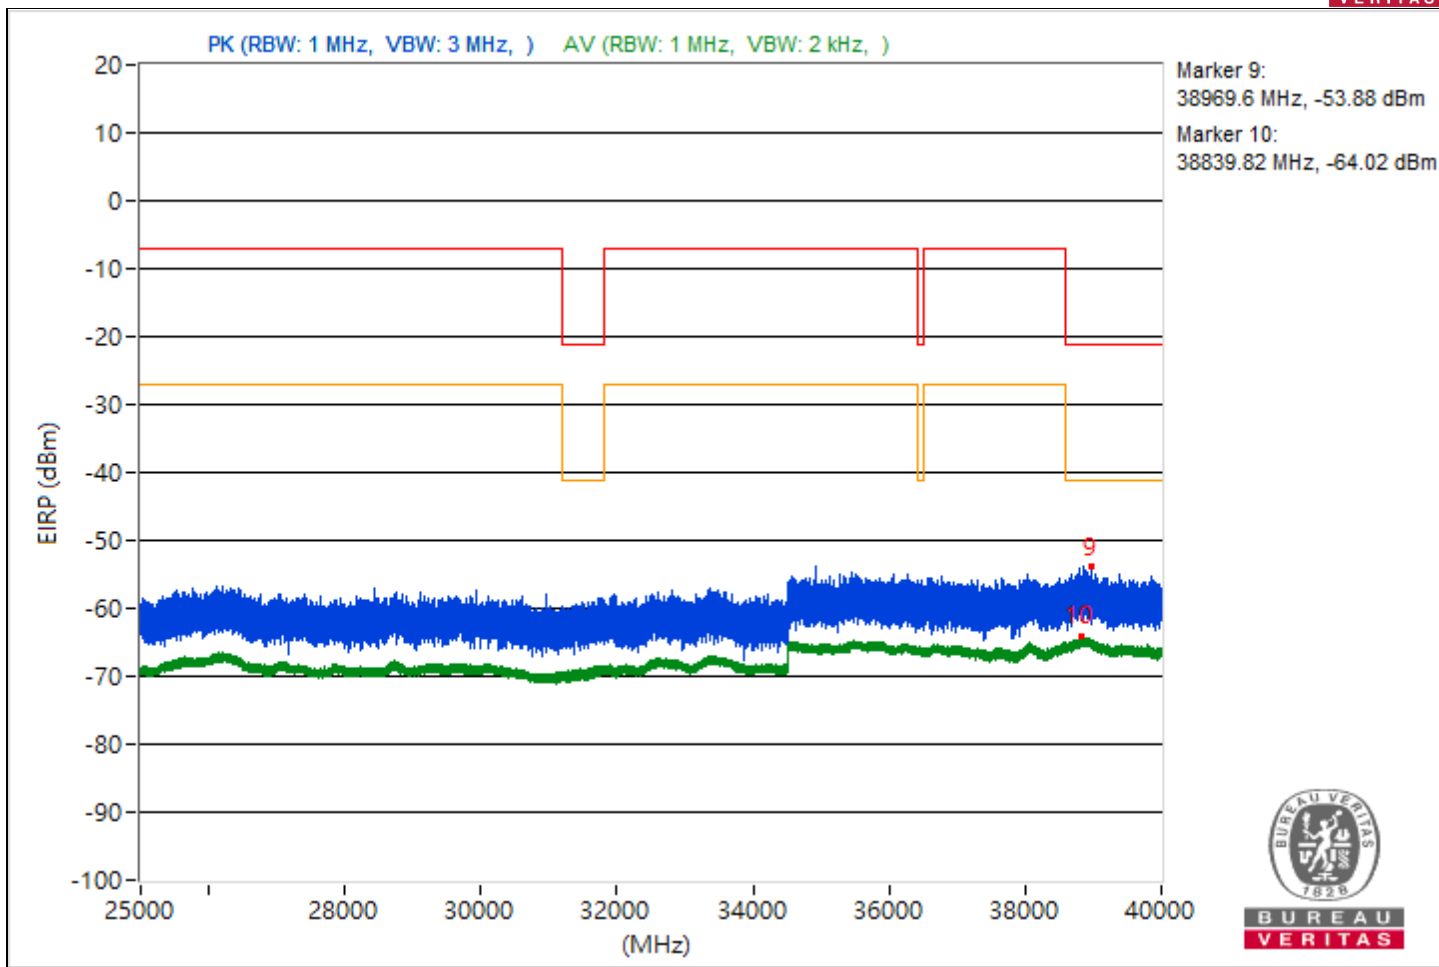


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.19	48.01 PK	74	-25.99	-55.18	-55.18	4.92	-47.25
2	3804.2	36.11 AV	54	-17.89	-67.08	-67.08	4.92	-59.15
3	7351.8	47.18 PK	74	-26.82	-56.01	-56.01	4.92	-48.08
4	14478.93	35.21 AV	54	-18.79	-67.98	-67.98	4.92	-60.05
5	19395.4	48.86 PK	74	-25.14	-54.33	-54.33	4.92	-46.4
6	21116.2	37.18 AV	54	-16.82	-66.02	-66.02	4.92	-58.08
7	23716.1	49.51 PK	74	-24.49	-53.68	-53.68	4.92	-45.75
8	23690.5	38.72 AV	54	-15.28	-64.47	-64.47	4.92	-56.54
9	38905.87	42.1 PK	74	-31.9	-61.09	-61.09	4.92	-53.16
10	38891.82	31.46 AV	54	-22.54	-71.73	-71.73	4.92	-63.8

Note: Margin value = Emission Level - Limit value

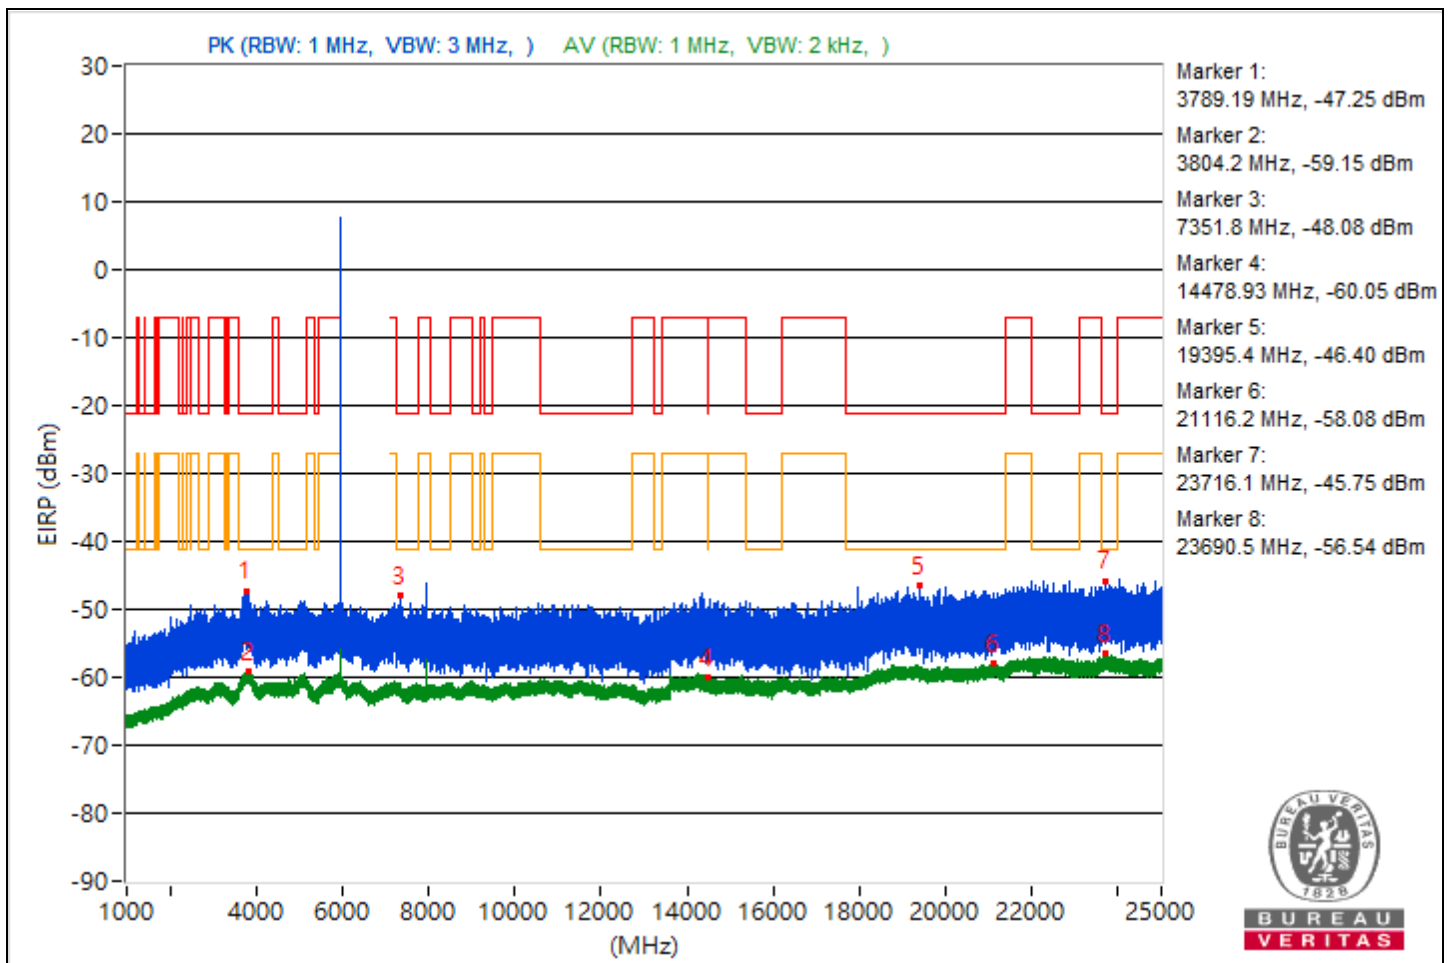


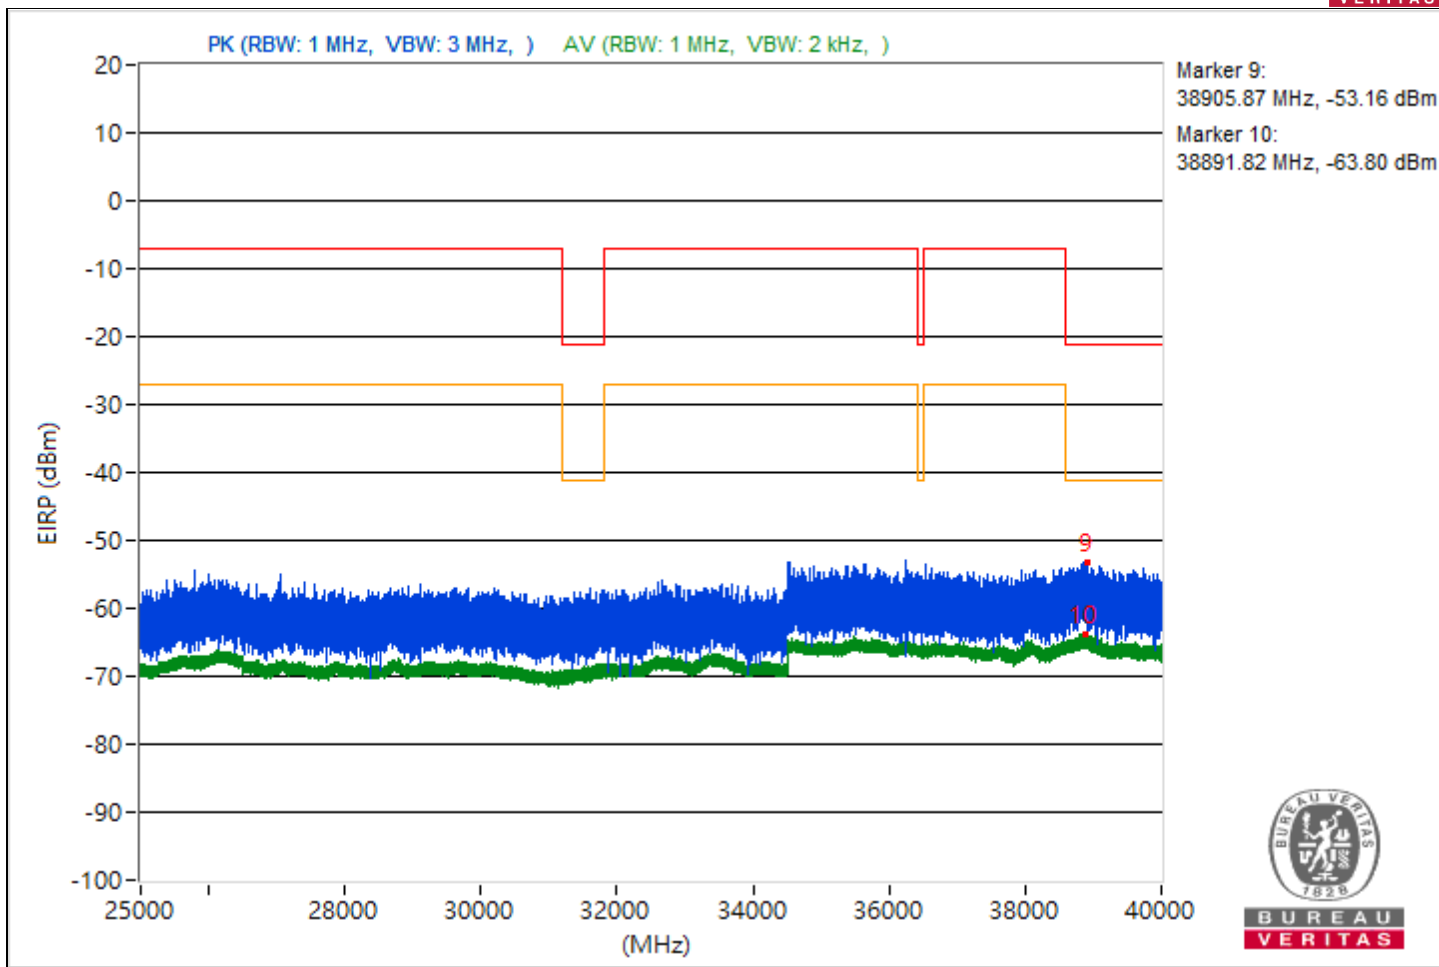


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.28	47.16 PK	74	-26.84	-55.17	-57.11	4.92	-48.1
2	3816.41	35.92 AV	54	-18.08	-67.91	-66.72	4.92	-59.34
3	15577.33	45.04 PK	74	-28.96	-60.85	-56.5	4.92	-50.22
4	15638.76	34.36 AV	54	-19.64	-69.67	-68.12	4.92	-60.9
5	19117.2	47.28 PK	74	-26.72	-54.02	-59.34	4.92	-47.98
6	18822.1	36.83 AV	54	-17.17	-66.85	-65.93	4.92	-58.43
7	23706.3	48.65 PK	74	-25.35	-53.55	-55.82	4.92	-46.61
8	23931.7	37.9 AV	54	-16.1	-66.1	-64.61	4.92	-57.36
9	38871.64	41.66 PK	74	-32.34	-59.8	-64.45	4.92	-53.6
10	38849.24	30.79 AV	54	-23.21	-73.13	-71.78	4.92	-64.47

Note: Margin value = Emission Level - Limit value

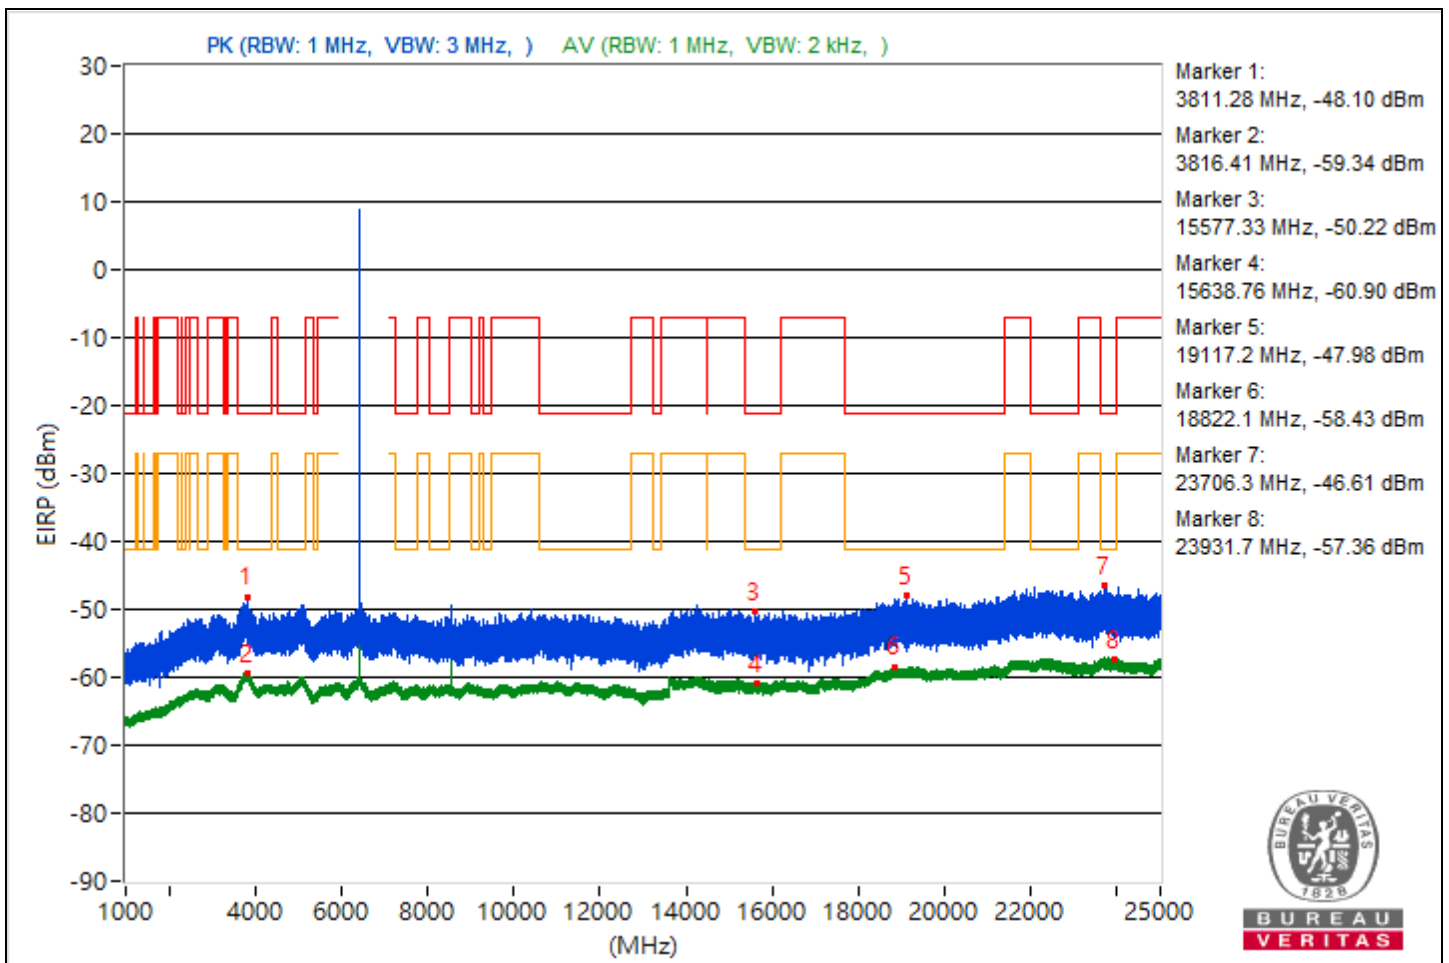


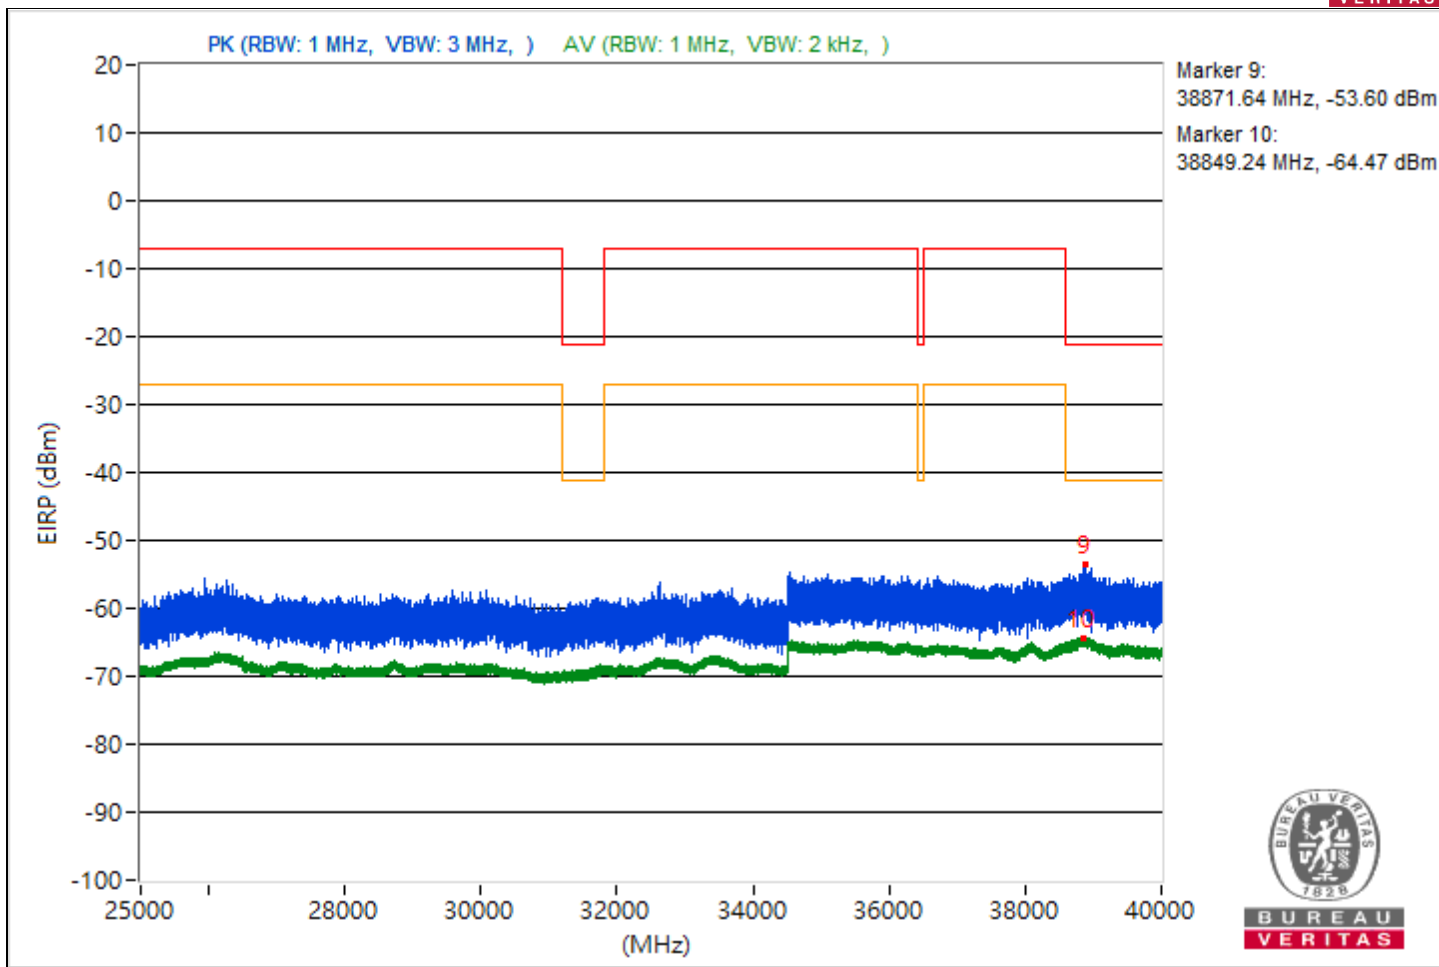


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.89	45.82 PK	74	-28.18	-55.45	-60.88	4.92	-49.44
2	3809.88	36.05 AV	54	-17.95	-67.57	-66.74	4.92	-59.21
3	11520.18	45.66 PK	74	-28.34	-59.43	-56.22	4.92	-49.6
4	14478.58	34.62 AV	54	-19.38	-69.3	-67.96	4.92	-60.64
5	20687.2	46.84 PK	74	-27.16	-62.2	-53.95	4.92	-48.42
6	21141	36.85 AV	54	-17.15	-66.8	-65.93	4.92	-58.41
7	22622.7	47.61 PK	74	-26.39	-58.7	-53.78	4.92	-47.65
8	23760.3	37.84 AV	54	-16.16	-64.76	-66.03	4.92	-57.42
9	39403.38	40.7 PK	74	-33.3	-66.05	-60.56	4.92	-54.56
10	38910.31	30.96 AV	54	-23.04	-72.69	-71.81	4.92	-64.3

Note: Margin value = Emission Level - Limit value

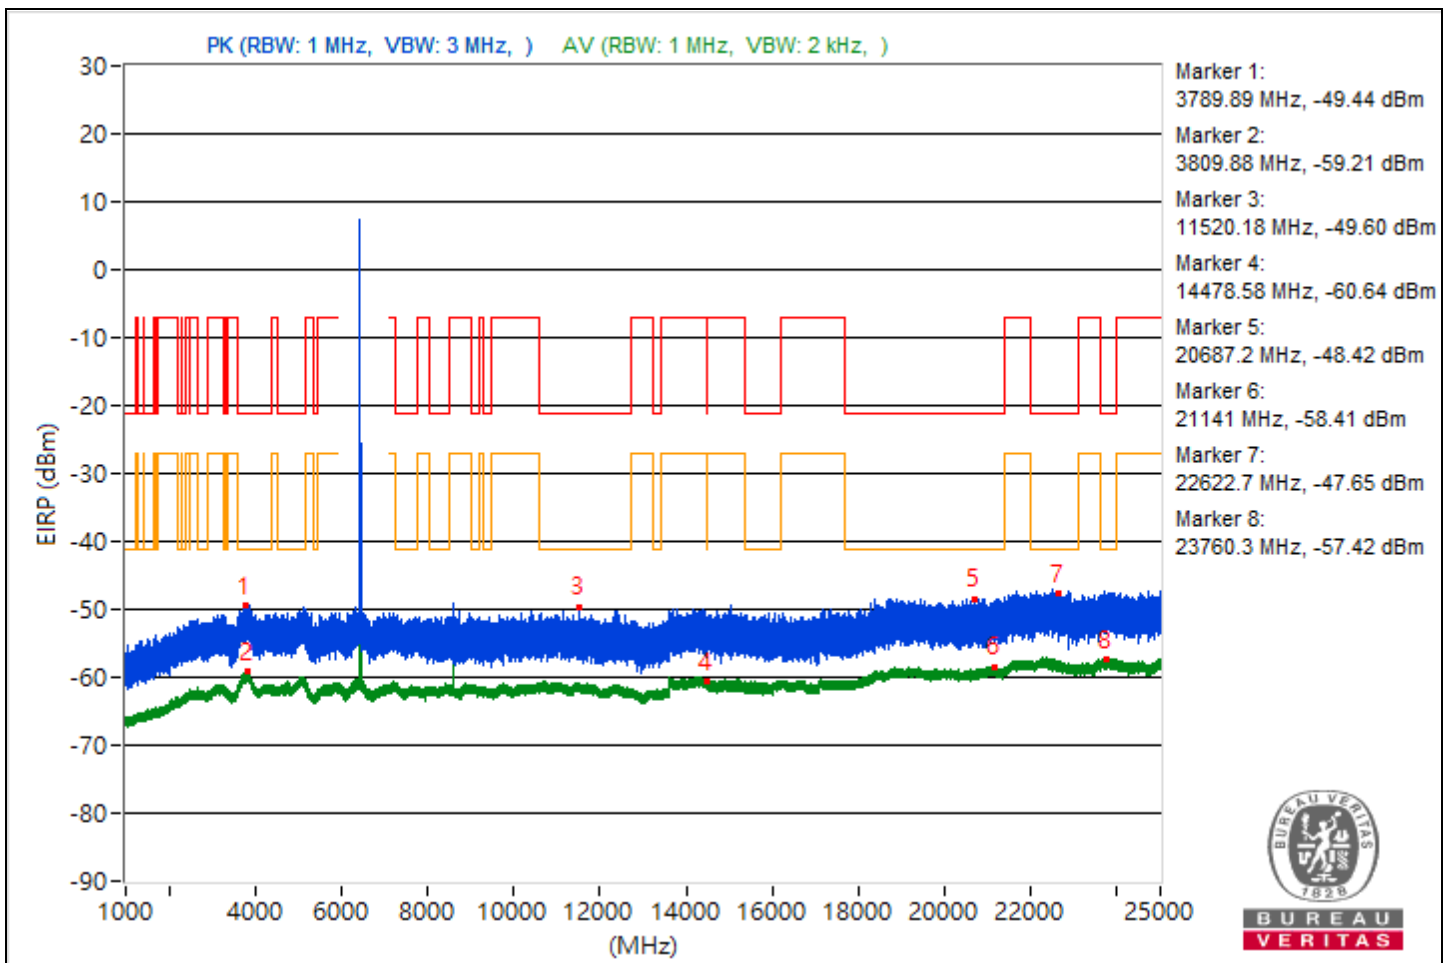


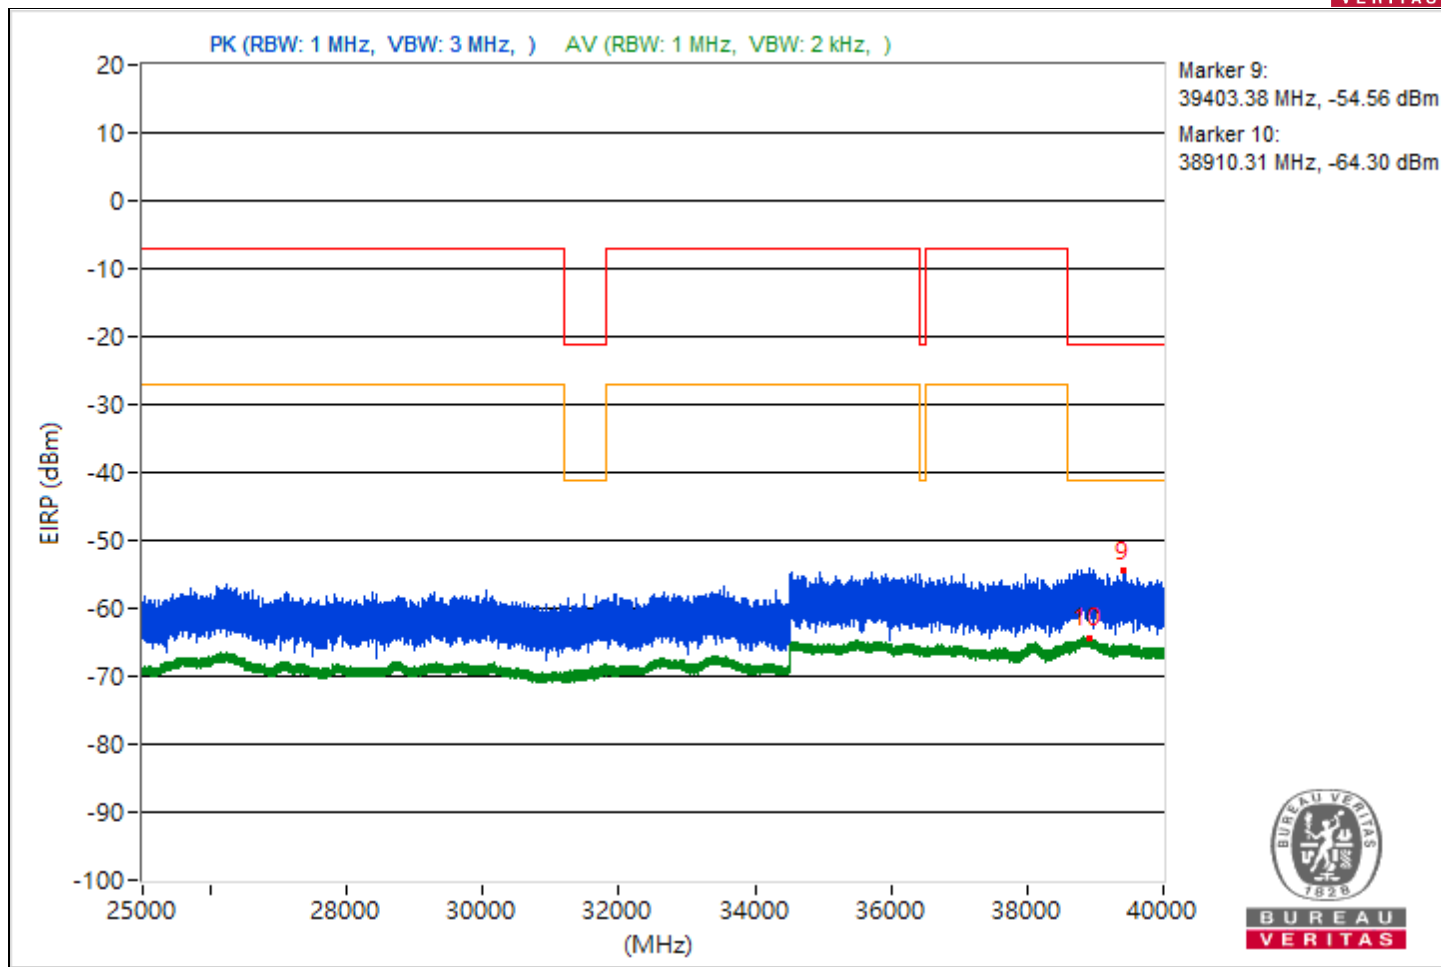


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3873.58	46.03 PK	74	-27.97	-55.46	-59.99	4.92	-49.23
2	3780.4	35.88 AV	54	-18.12	-67.05	-67.59	4.92	-59.38
3	14484.8	45.08 PK	74	-28.92	-56.31	-61.25	4.92	-50.18
4	14482.22	34.48 AV	54	-19.52	-68.21	-69.28	4.92	-60.78
5	20866	46.71 PK	74	-27.29	-60.09	-54.53	4.92	-48.55
6	21183.8	36.53 AV	54	-17.47	-66.12	-67.27	4.92	-58.73
7	22366.1	48.58 PK	74	-25.42	-53.54	-56.02	4.92	-46.68
8	23629.4	37.88 AV	54	-16.12	-66.13	-64.62	4.92	-57.38
9	38904.98	41.92 PK	74	-32.08	-66.14	-59.03	4.92	-53.34
10	38869.69	30.98 AV	54	-23.02	-71.94	-72.5	4.92	-64.28

Note: Margin value = Emission Level - Limit value

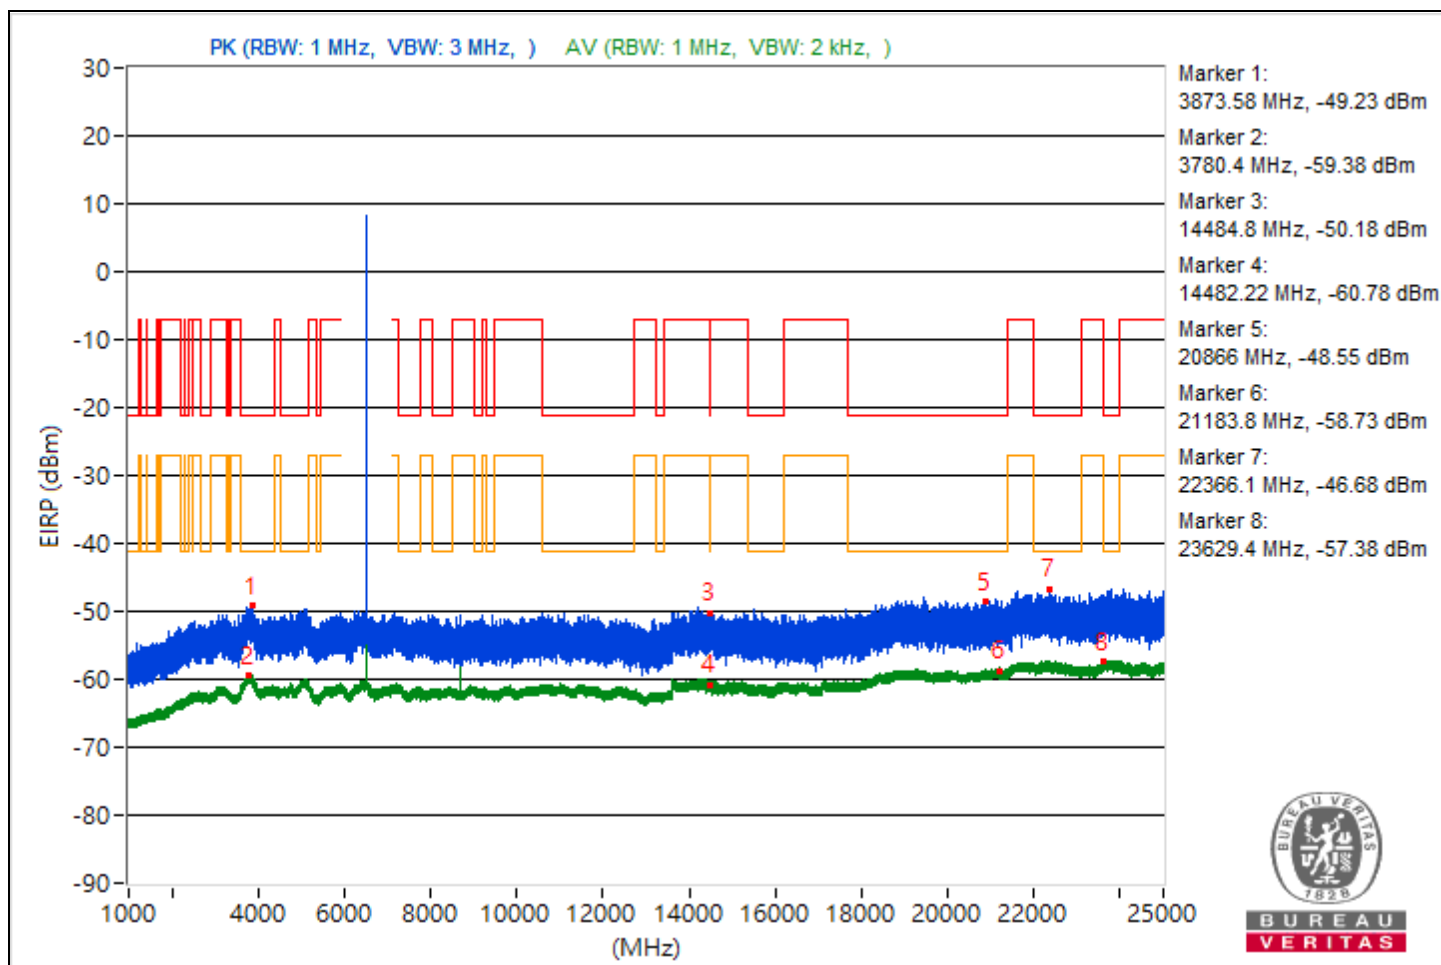


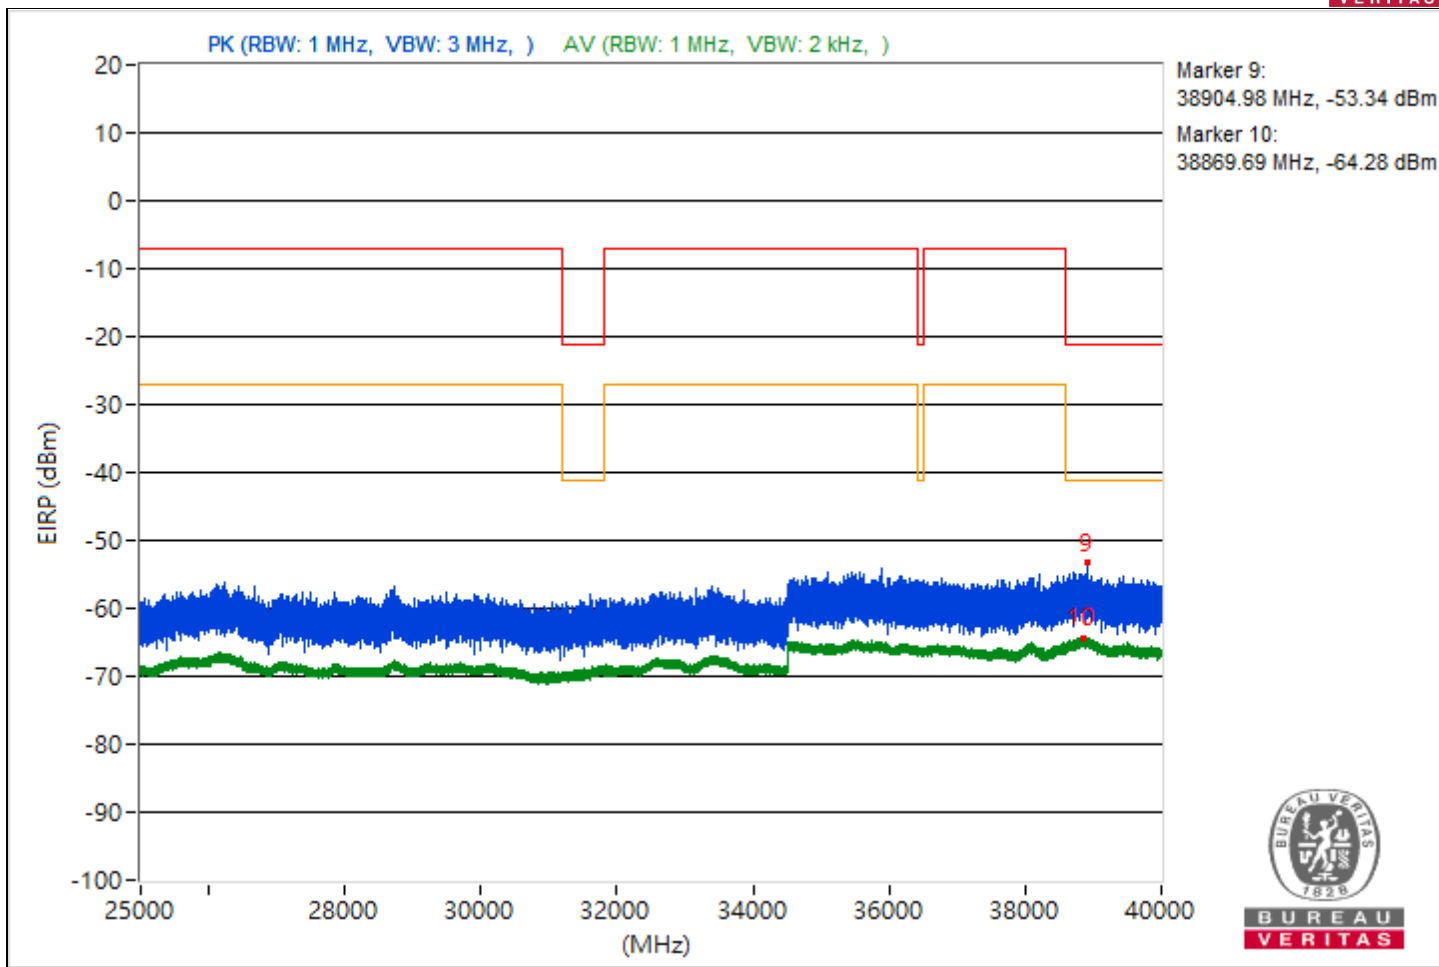


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.06	45.63 PK	74	-28.37	-60.17	-55.94	4.92	-49.63
2	3810.11	35.79 AV	54	-18.21	-67.12	-67.7	4.92	-59.47
3	11002.31	45.06 PK	74	-28.94	-56	-62.46	4.92	-50.2
4	14477.07	34.79 AV	54	-19.21	-67.87	-69.01	4.92	-60.47
5	19841.4	46.65 PK	74	-27.35	-60.12	-54.61	4.92	-48.61
6	21129.9	36.66 AV	54	-17.34	-66.04	-67.08	4.92	-58.6
7	22290.1	48.4 PK	74	-25.6	-58.19	-52.91	4.92	-46.86
8	22237.1	37.99 AV	54	-16.01	-64.82	-65.62	4.92	-57.27
9	38956.44	40.87 PK	74	-33.13	-60.07	-67.28	4.92	-54.39
10	38841.6	31.06 AV	54	-22.94	-71.6	-72.73	4.92	-64.2

Note: Margin value = Emission Level - Limit value

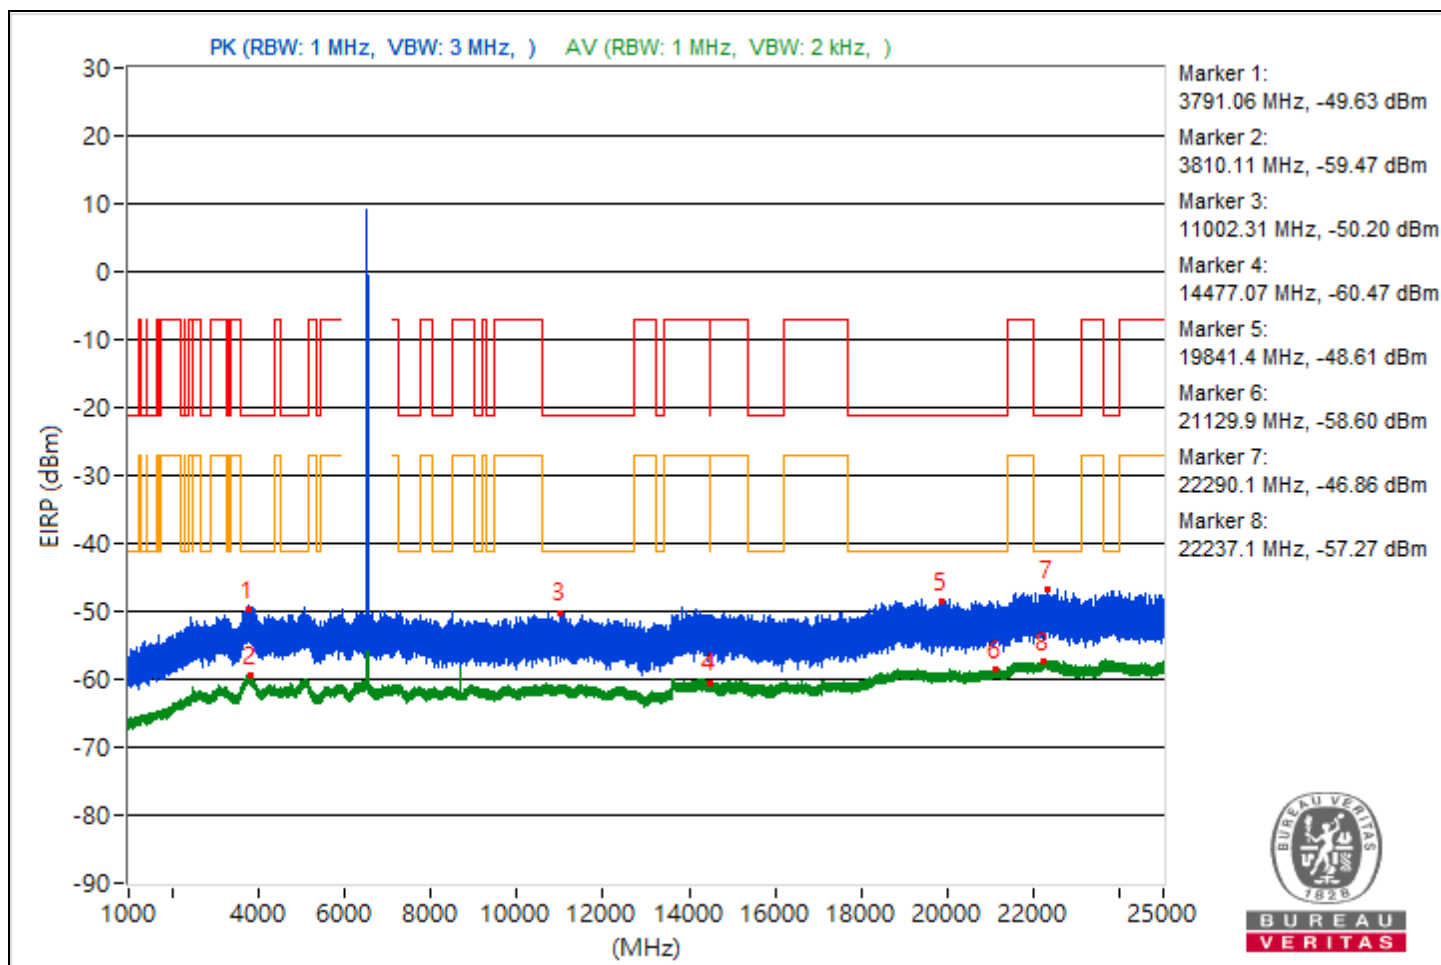


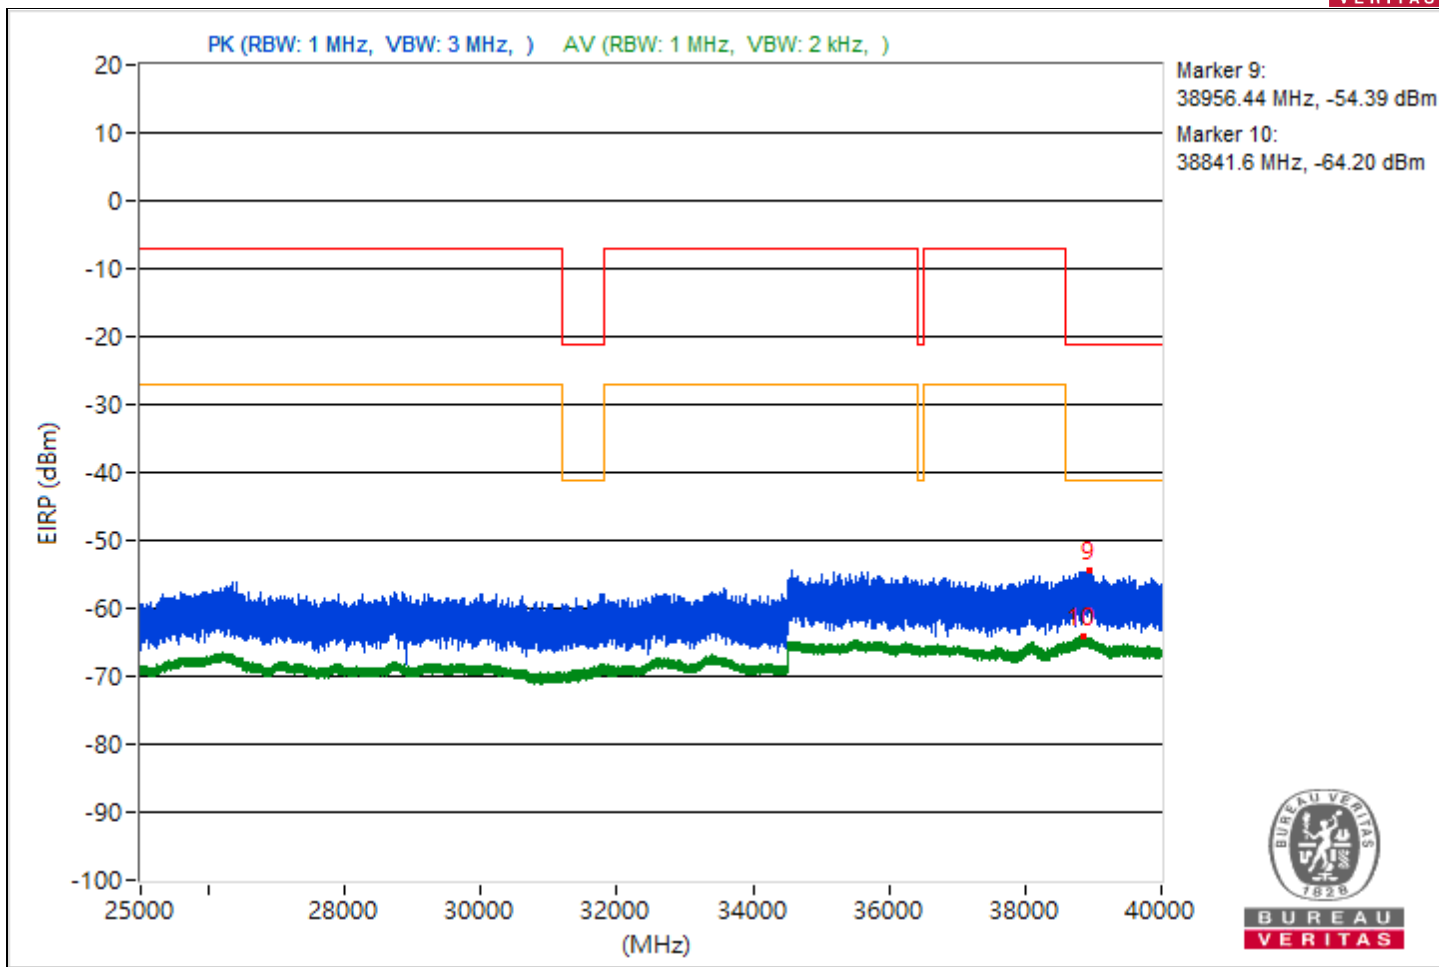


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3719.66	46.02 PK	74	-27.98	-60.52	-55.3	4.92	-49.24
2	3782.66	36.01 AV	54	-17.99	-66.92	-67.45	4.92	-59.25
3	7291.06	45.45 PK	74	-28.55	-61.18	-55.85	4.92	-49.81
4	9166.76	35.33 AV	54	-18.67	-68.35	-67.43	4.92	-59.93
5	19208.2	46.48 PK	74	-27.52	-61.34	-54.52	4.92	-48.78
6	21180.2	36.76 AV	54	-17.24	-66.85	-66.04	4.92	-58.5
7	22492.3	48.5 PK	74	-25.5	-53.64	-56.07	4.92	-46.76
8	23909.5	37.92 AV	54	-16.08	-64.67	-65.97	4.92	-57.34
9	38729.6	41.28 PK	74	-32.72	-60.47	-64.09	4.92	-53.98
10	38912.8	31.03 AV	54	-22.97	-72.55	-71.8	4.92	-64.23

Note: Margin value = Emission Level - Limit value

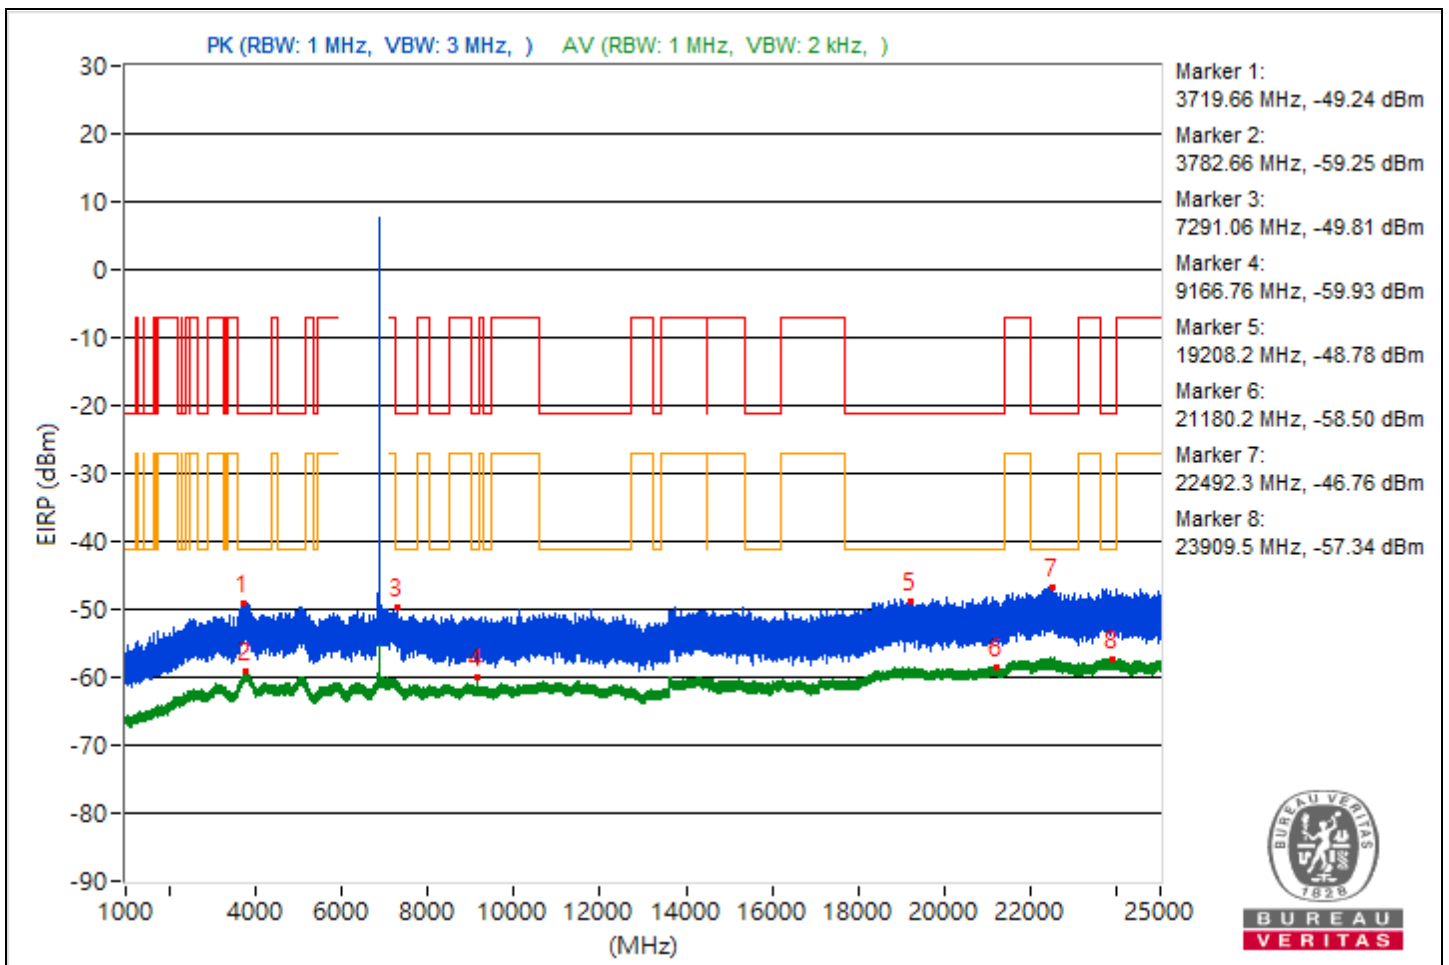


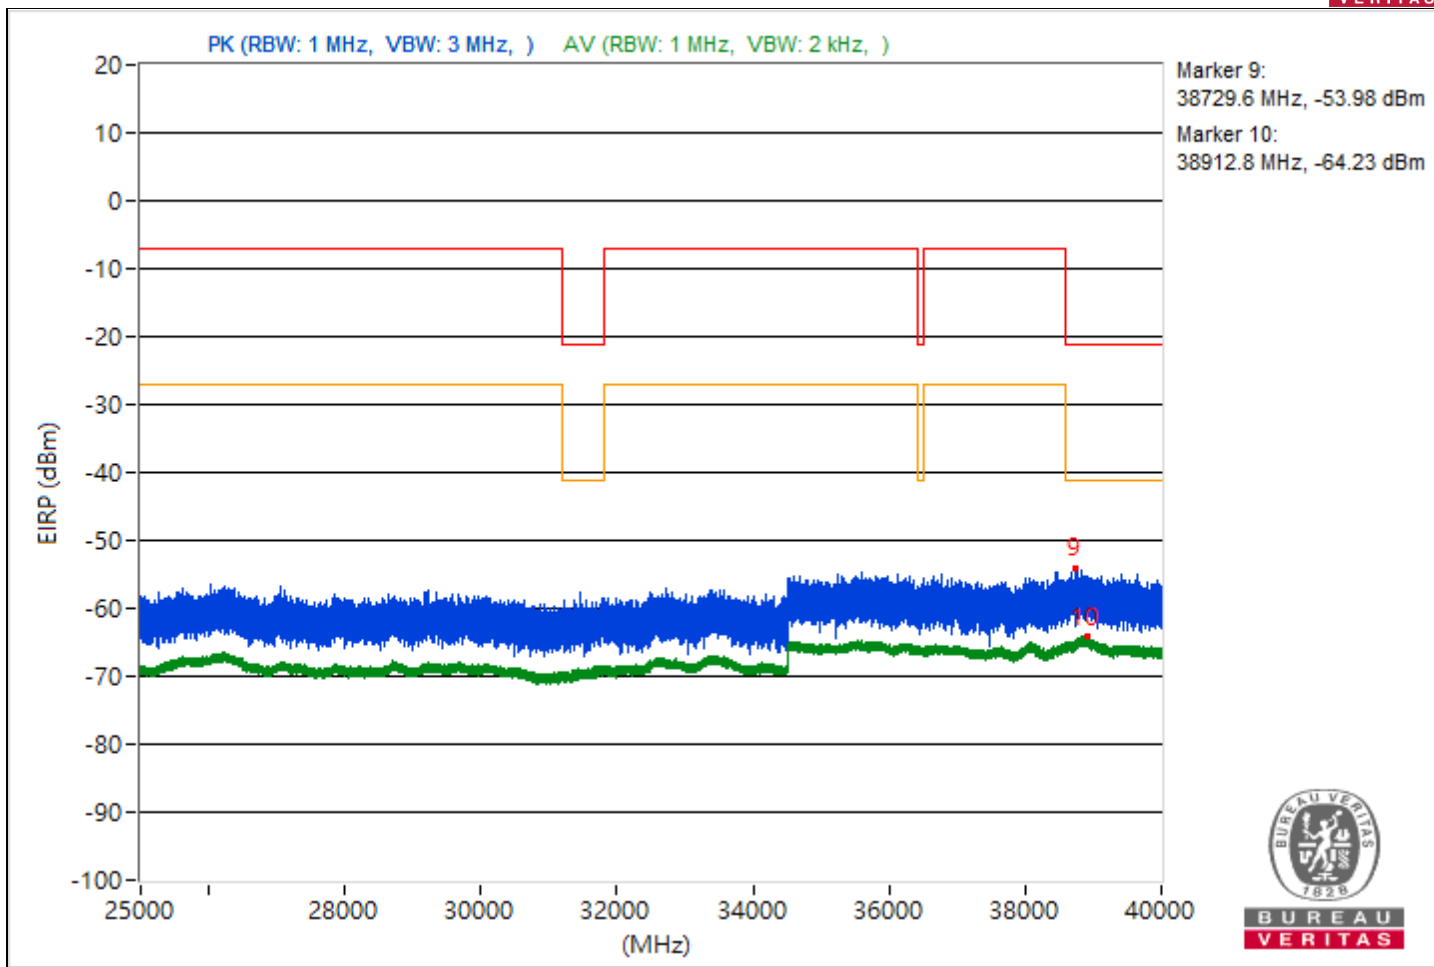


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3878.32	46.52 PK	74	-27.48	-59.11	-55.12	4.92	-48.74
2	3788.88	36.01 AV	54	-17.99	-67.44	-66.92	4.92	-59.25
3	7307.23	45.06 PK	74	-28.94	-62.16	-56.08	4.92	-50.2
4	7252.32	35.05 AV	54	-18.95	-68.63	-67.69	4.92	-60.21
5	19211.6	46.61 PK	74	-27.39	-60.34	-54.59	4.92	-48.65
6	21140.1	36.63 AV	54	-17.37	-67.1	-66.08	4.92	-58.63
7	22455	48.36 PK	74	-25.64	-53.34	-57.1	4.92	-46.9
8	22479.8	37.95 AV	54	-16.05	-65.81	-64.74	4.92	-57.31
9	38936.09	41.12 PK	74	-32.88	-60.13	-65.69	4.92	-54.14
10	38813.87	30.98 AV	54	-23.02	-72.55	-71.89	4.92	-64.28

Note: Margin value = Emission Level - Limit value

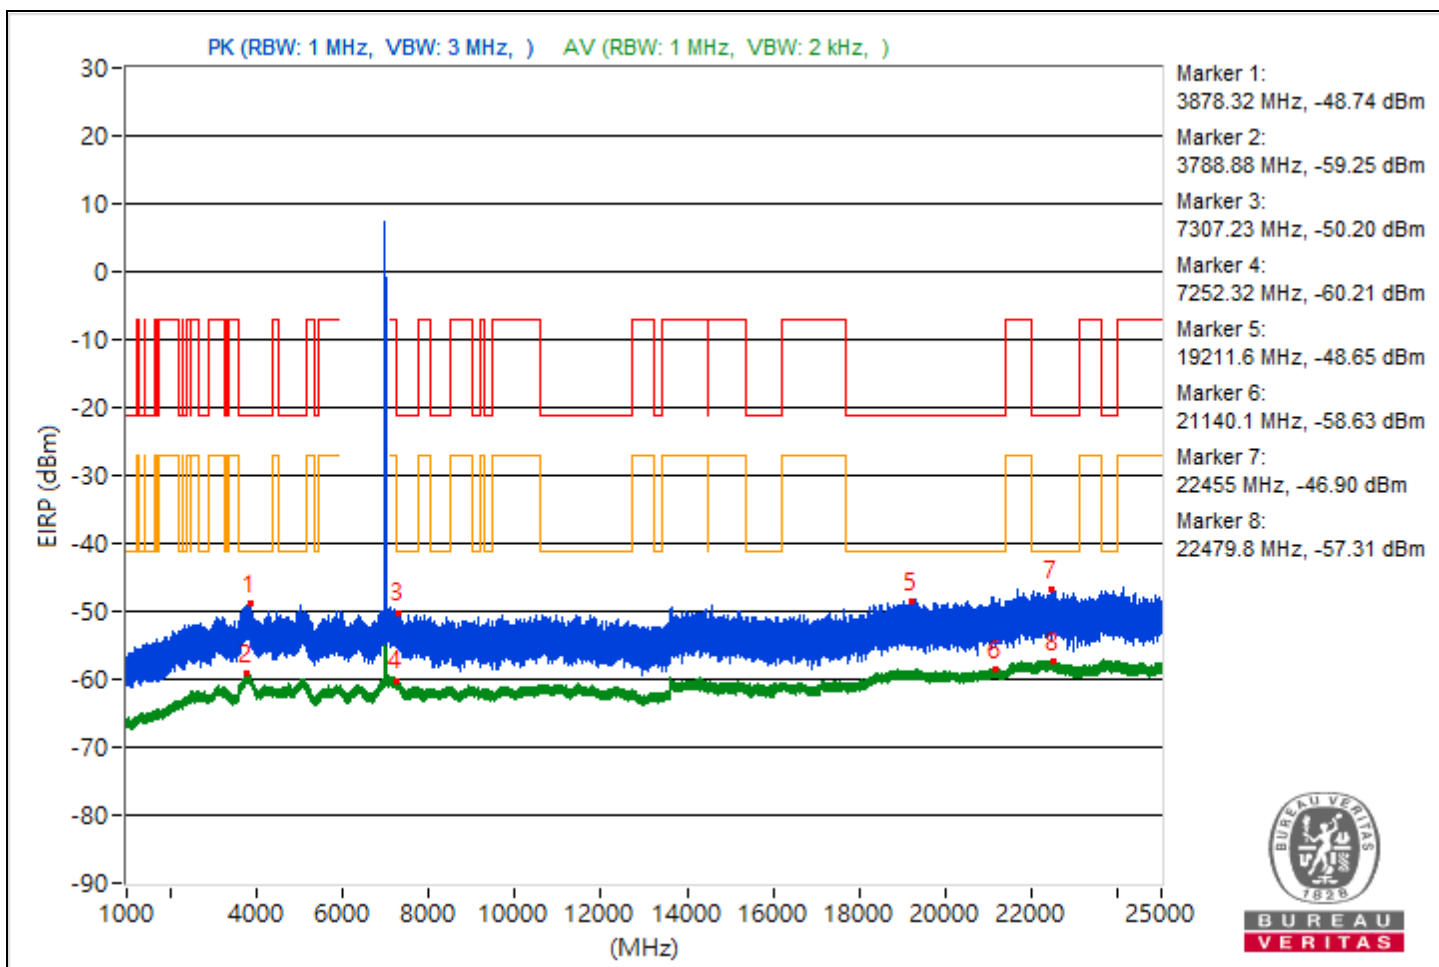


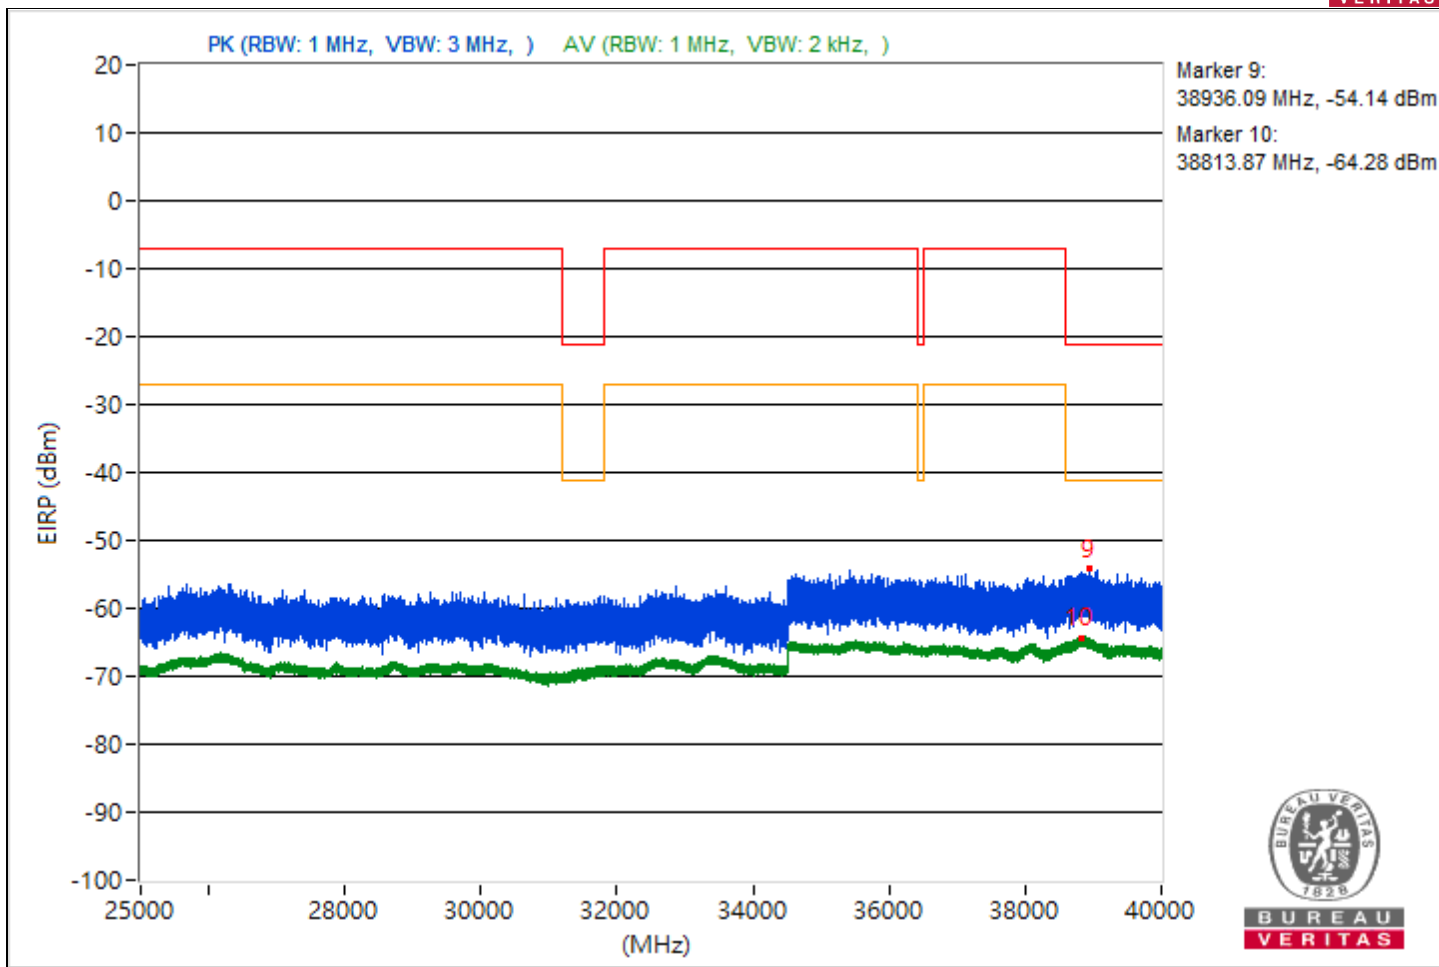


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.67	47.26 PK	74	-26.74	-58.61	-54.29	4.92	-48
2	3791.21	35.83 AV	54	-18.17	-67.06	-67.68	4.92	-59.43
3	7359.11	45.79 PK	74	-28.21	-56.36	-58.76	4.92	-49.47
4	7250.07	35.28 AV	54	-18.72	-67.5	-68.37	4.92	-59.98
5	18950.6	47.34 PK	74	-26.66	-58.62	-54.18	4.92	-47.92
6	21167.8	36.94 AV	54	-17.06	-66.78	-65.79	4.92	-58.32
7	22131.8	48.14 PK	74	-25.86	-53.16	-58.48	4.92	-47.12
8	23693.3	37.92 AV	54	-16.08	-64.69	-65.94	4.92	-57.34
9	38801.96	41.28 PK	74	-32.72	-59.82	-66.09	4.92	-53.98
10	38820.98	30.93 AV	54	-23.07	-72.9	-71.7	4.92	-64.33

Note: Margin value = Emission Level - Limit value

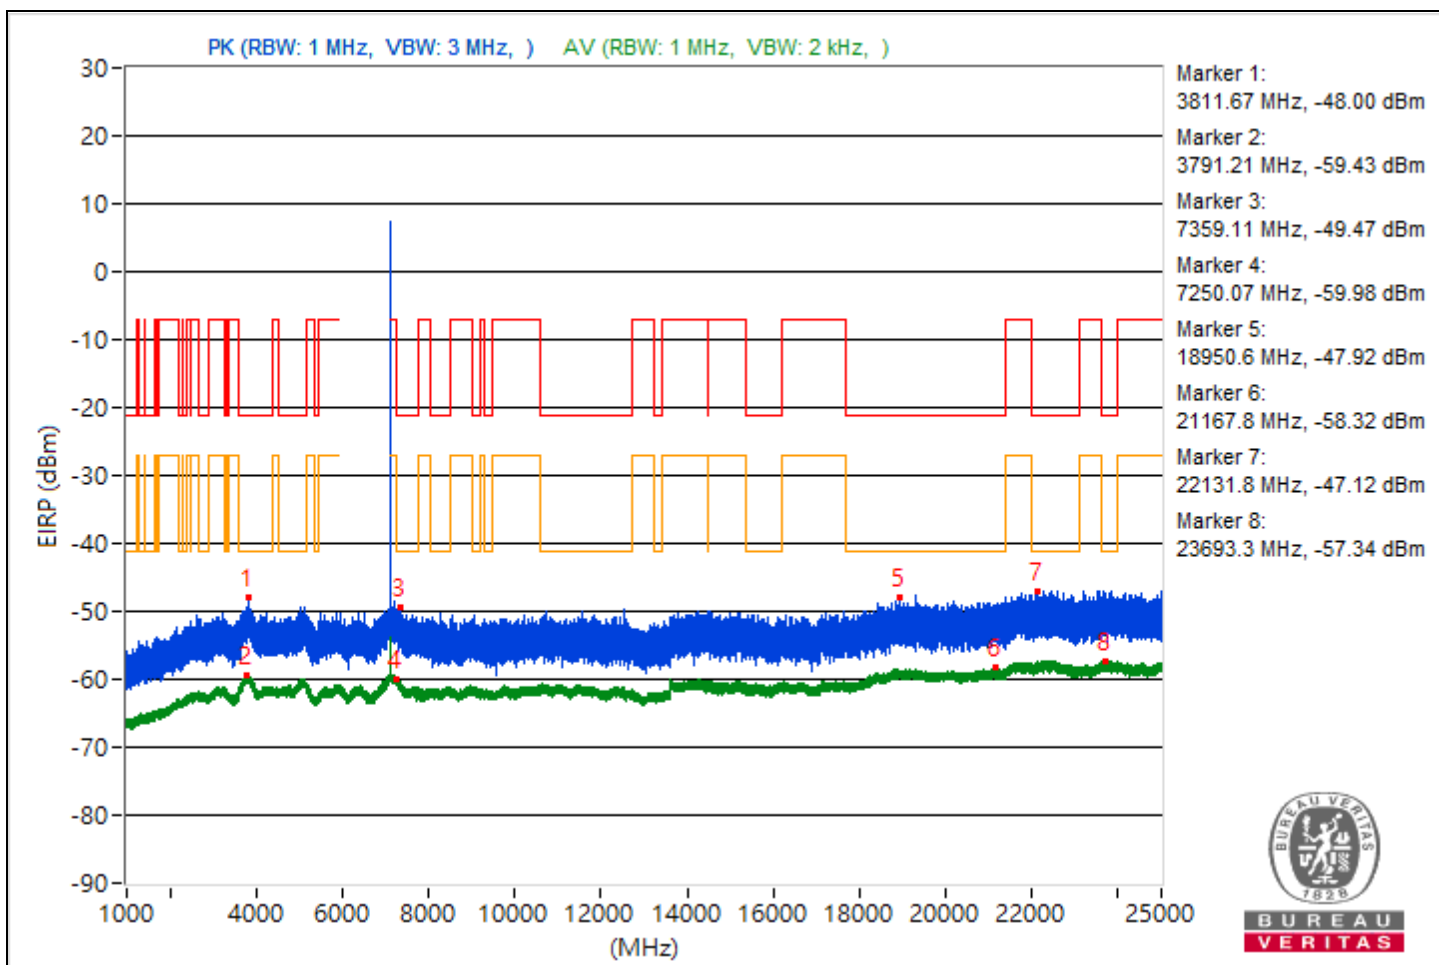


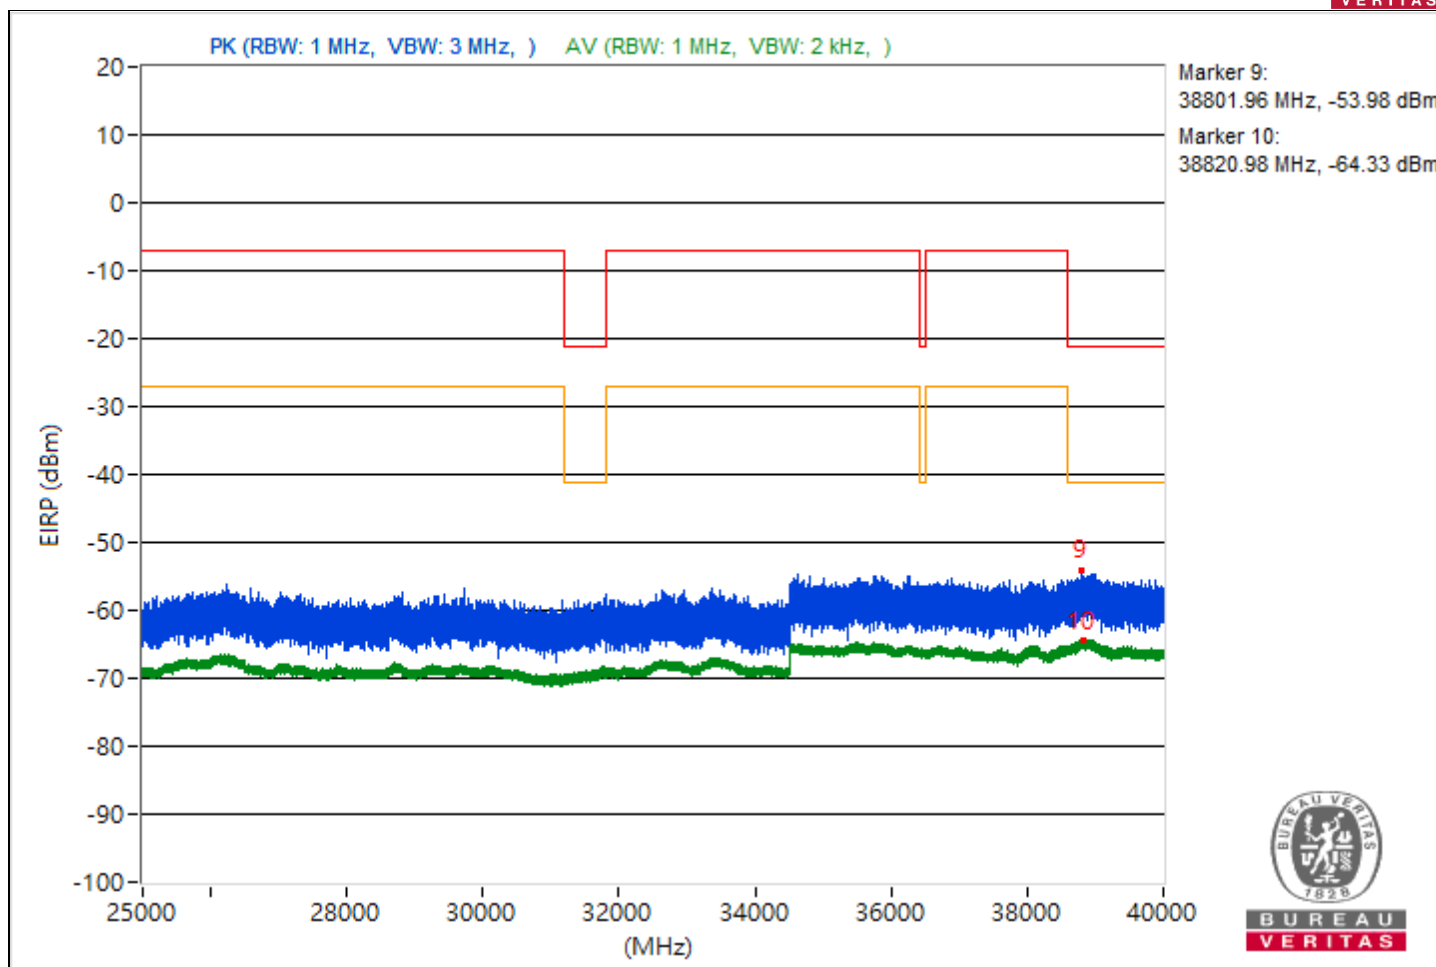


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.83	46.54 PK	74	-27.46	-54.83	-59.84	4.92	-48.72
2	3784.91	35.84 AV	54	-18.16	-66.98	-67.75	4.92	-59.42
3	15684.27	46.19 PK	74	-27.81	-54.65	-62.47	4.92	-49.07
4	14476.18	34.66 AV	54	-19.34	-68.03	-69.09	4.92	-60.6
5	20856.1	47.55 PK	74	-26.45	-57.94	-54.14	4.92	-47.71
6	21077.3	36.75 AV	54	-17.25	-66.08	-66.84	4.92	-58.51
7	22090.5	49.01 PK	74	-24.99	-59.66	-51.83	4.92	-46.25
8	23767.7	37.88 AV	54	-16.12	-64.7	-66.01	4.92	-57.38
9	38940.62	40.37 PK	74	-33.63	-67.84	-60.55	4.92	-54.89
10	38836.98	31.16 AV	54	-22.84	-73.09	-71.18	4.92	-64.1

Note: Margin value = Emission Level - Limit value

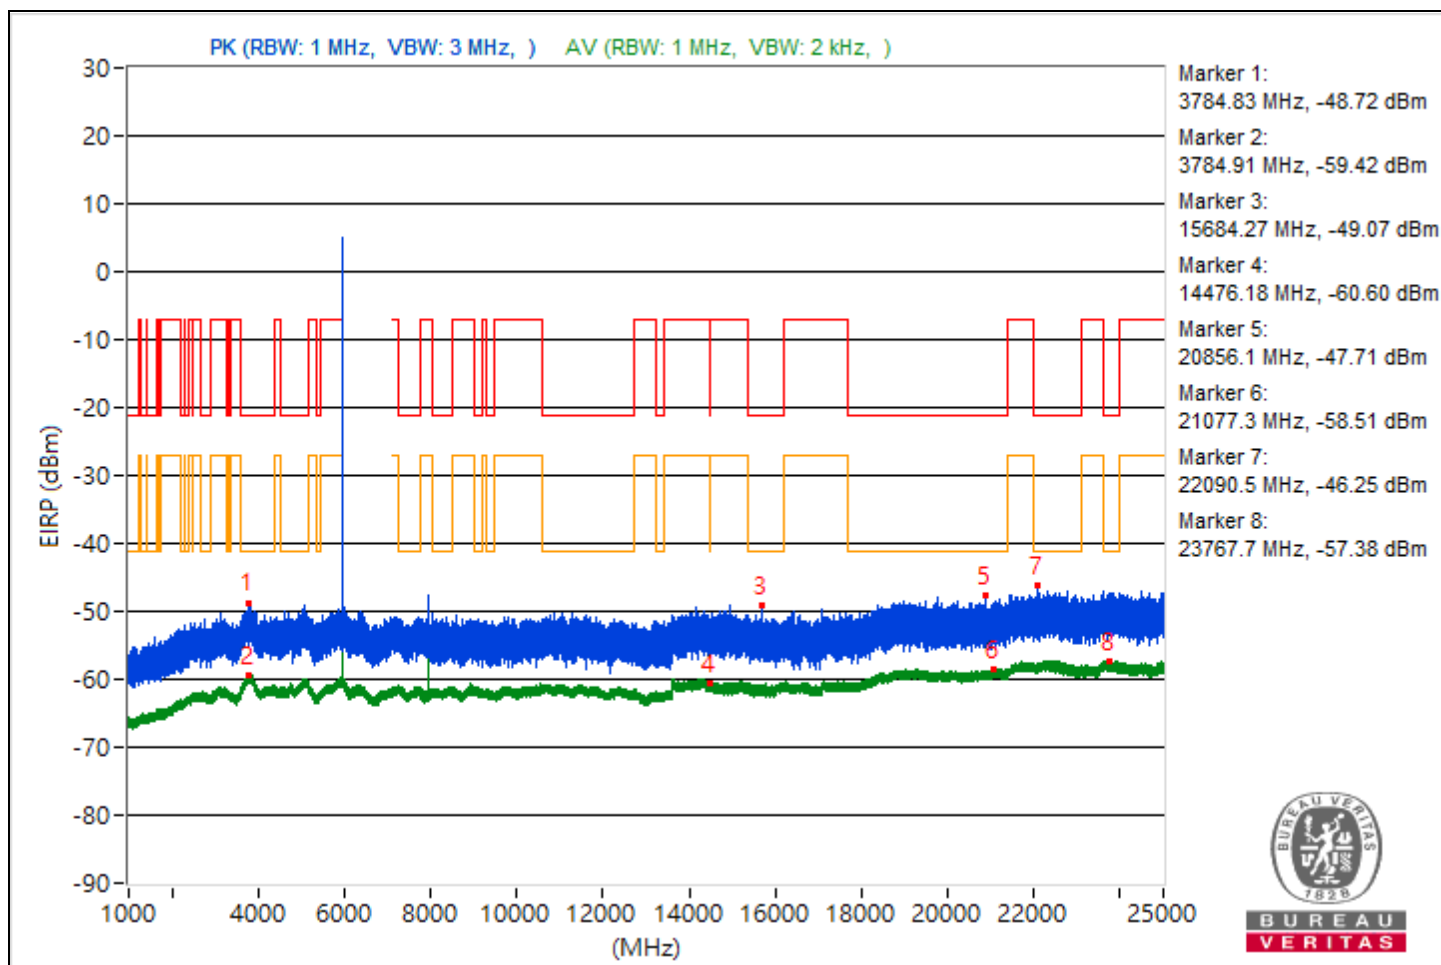


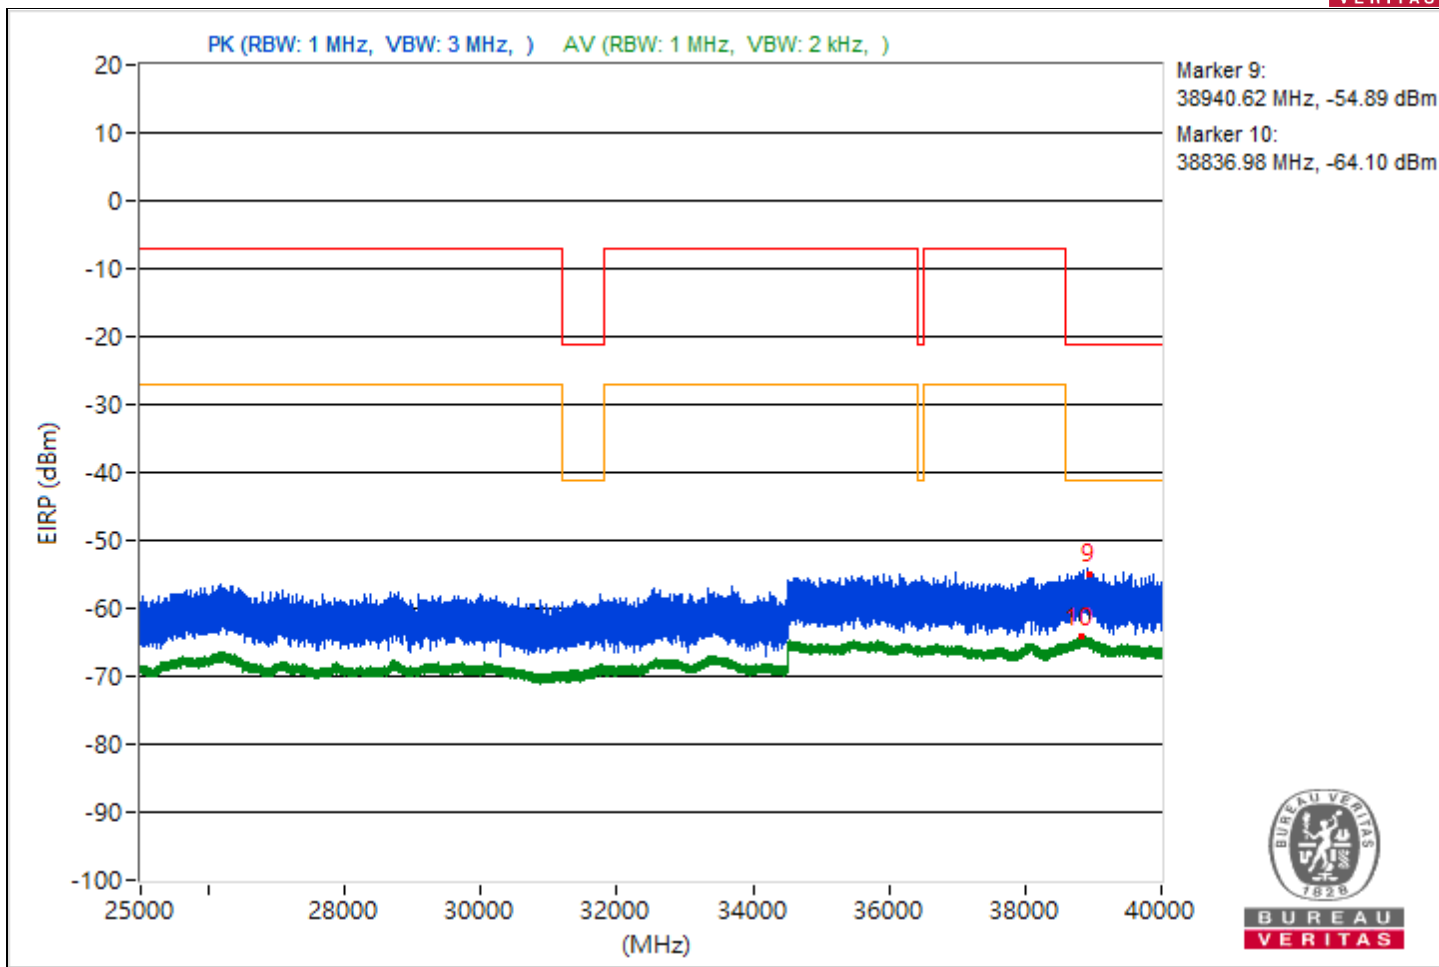


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.67	45.67 PK	74	-28.33	-55.55	-61.23	4.92	-49.59
2	3832.9	35.68 AV	54	-18.32	-67.94	-67.11	4.92	-59.58
3	7280.48	44.74 PK	74	-29.26	-61.51	-56.67	4.92	-50.52
4	14495.38	34.75 AV	54	-19.25	-68.26	-68.63	4.92	-60.51
5	19469.6	46.65 PK	74	-27.35	-54.23	-61.78	4.92	-48.61
6	21108.5	36.54 AV	54	-17.46	-67.24	-66.13	4.92	-58.72
7	22290.8	48.28 PK	74	-25.72	-53.07	-58.2	4.92	-46.98
8	22250.1	38.19 AV	54	-15.81	-65.53	-64.53	4.92	-57.07
9	39069.42	41.06 PK	74	-32.94	-64.72	-60.52	4.92	-54.2
10	38757.33	30.85 AV	54	-23.15	-73.03	-71.74	4.92	-64.41

Note: Margin value = Emission Level - Limit value

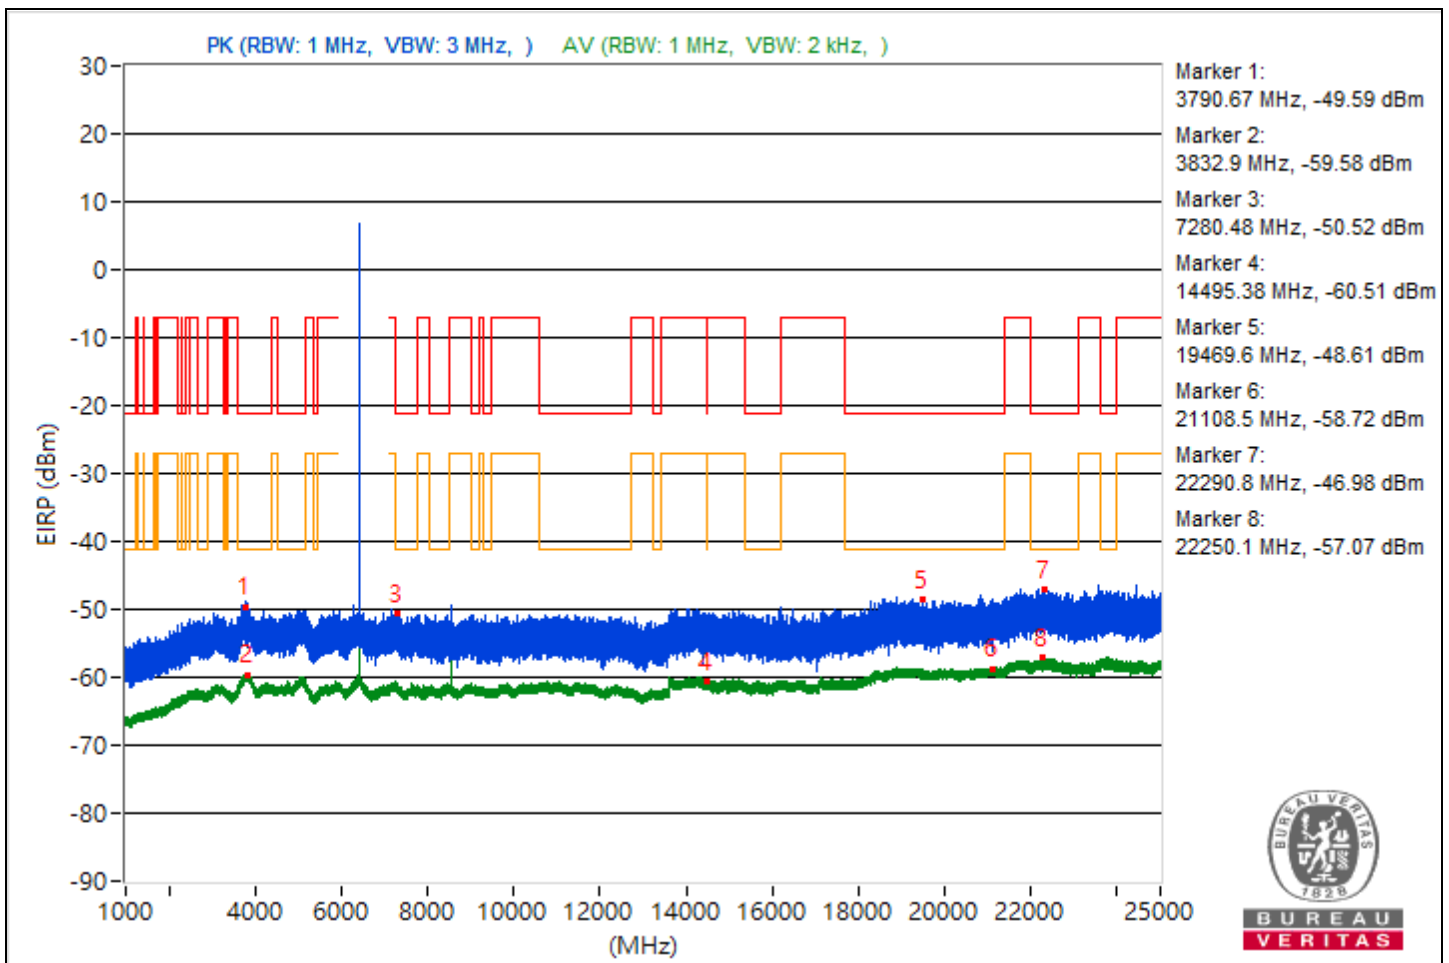


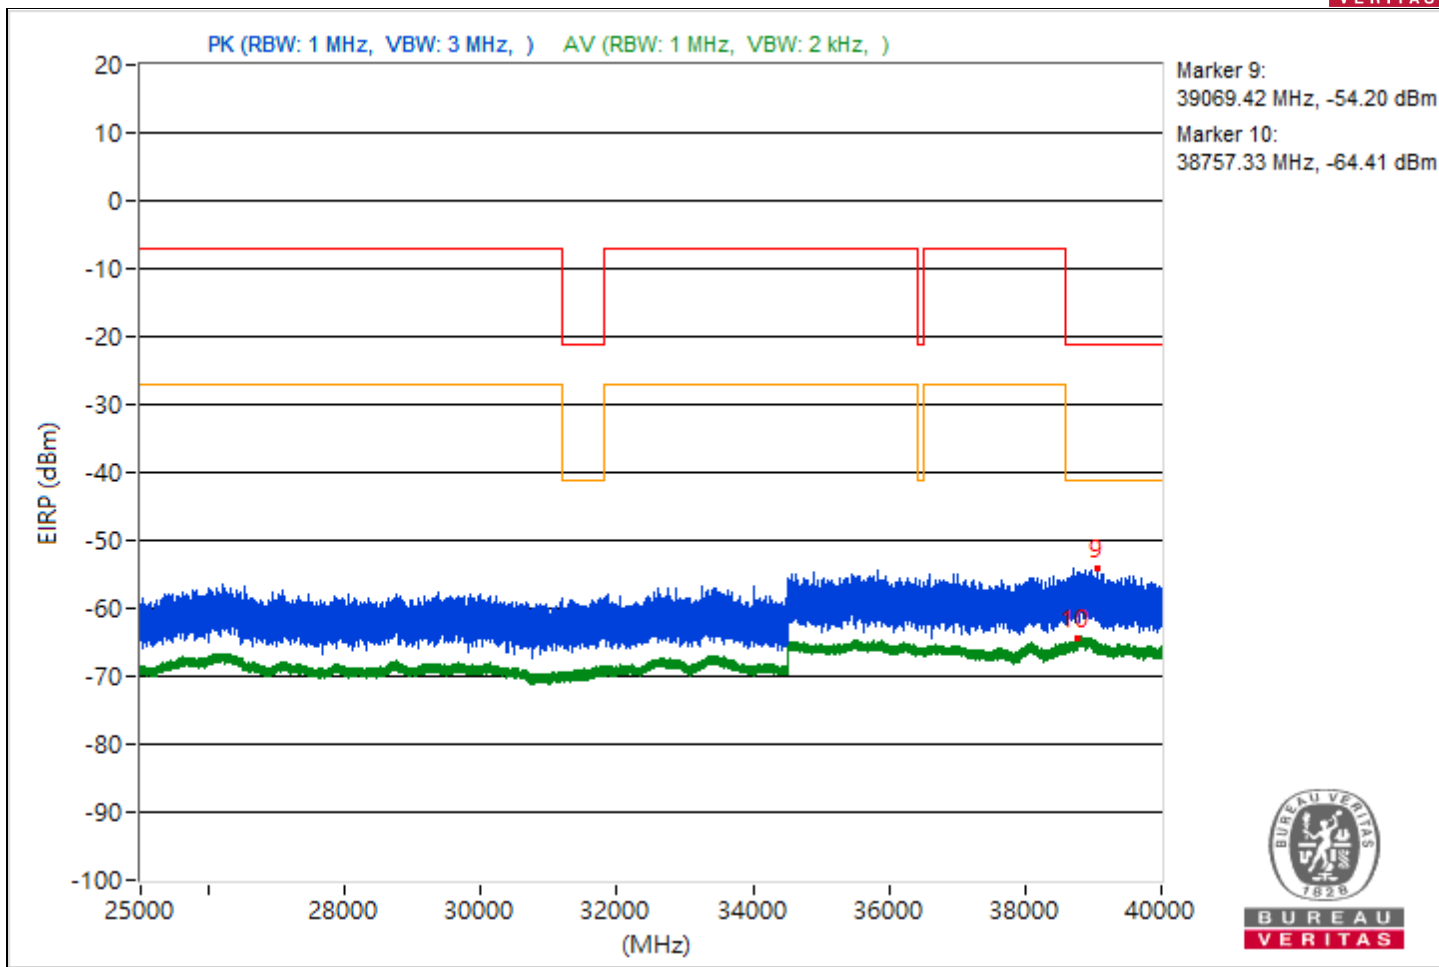


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3719.97	45.82 PK	74	-28.18	-56.13	-59.1	4.92	-49.44
2	3837.1	35.86 AV	54	-18.14	-66.94	-67.75	4.92	-59.4
3	10740.98	45.79 PK	74	-28.21	-55.45	-61.06	4.92	-49.47
4	14492.71	34.89 AV	54	-19.11	-68.58	-68.03	4.92	-60.37
5	18749.6	47.29 PK	74	-26.71	-57.95	-54.52	4.92	-47.97
6	21086.2	37.07 AV	54	-16.93	-65.61	-66.7	4.92	-58.19
7	23800.1	48.25 PK	74	-25.75	-57.88	-53.21	4.92	-47.01
8	23659.9	37.94 AV	54	-16.06	-66.15	-64.51	4.92	-57.32
9	38855.38	40.9 PK	74	-33.1	-65.8	-60.38	4.92	-54.36
10	38868.44	30.93 AV	54	-23.07	-72.65	-71.9	4.92	-64.33

Note: Margin value = Emission Level - Limit value

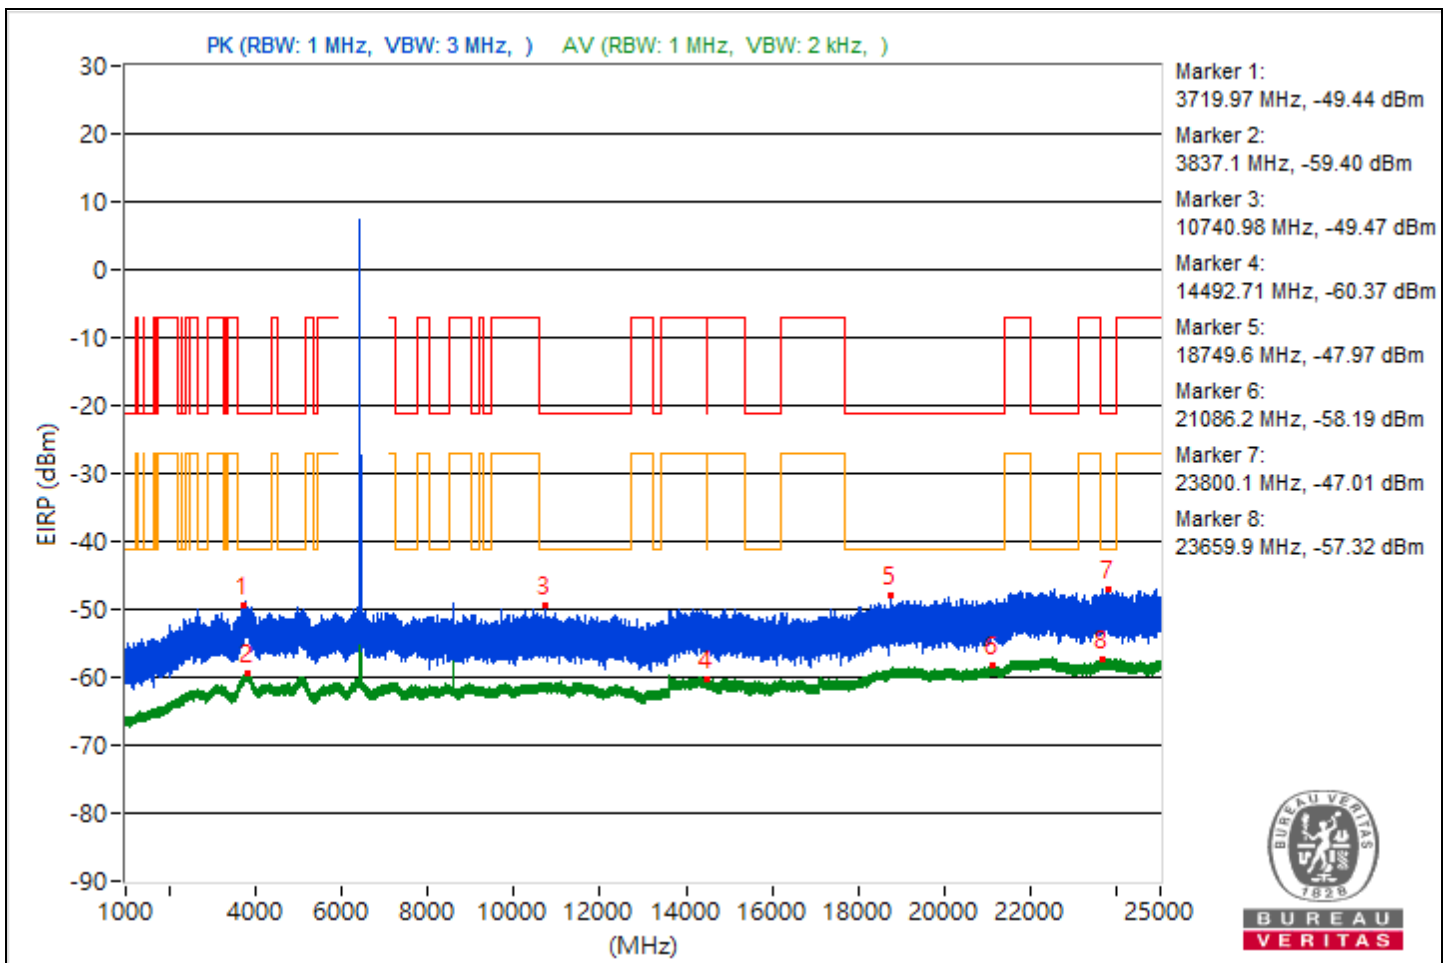


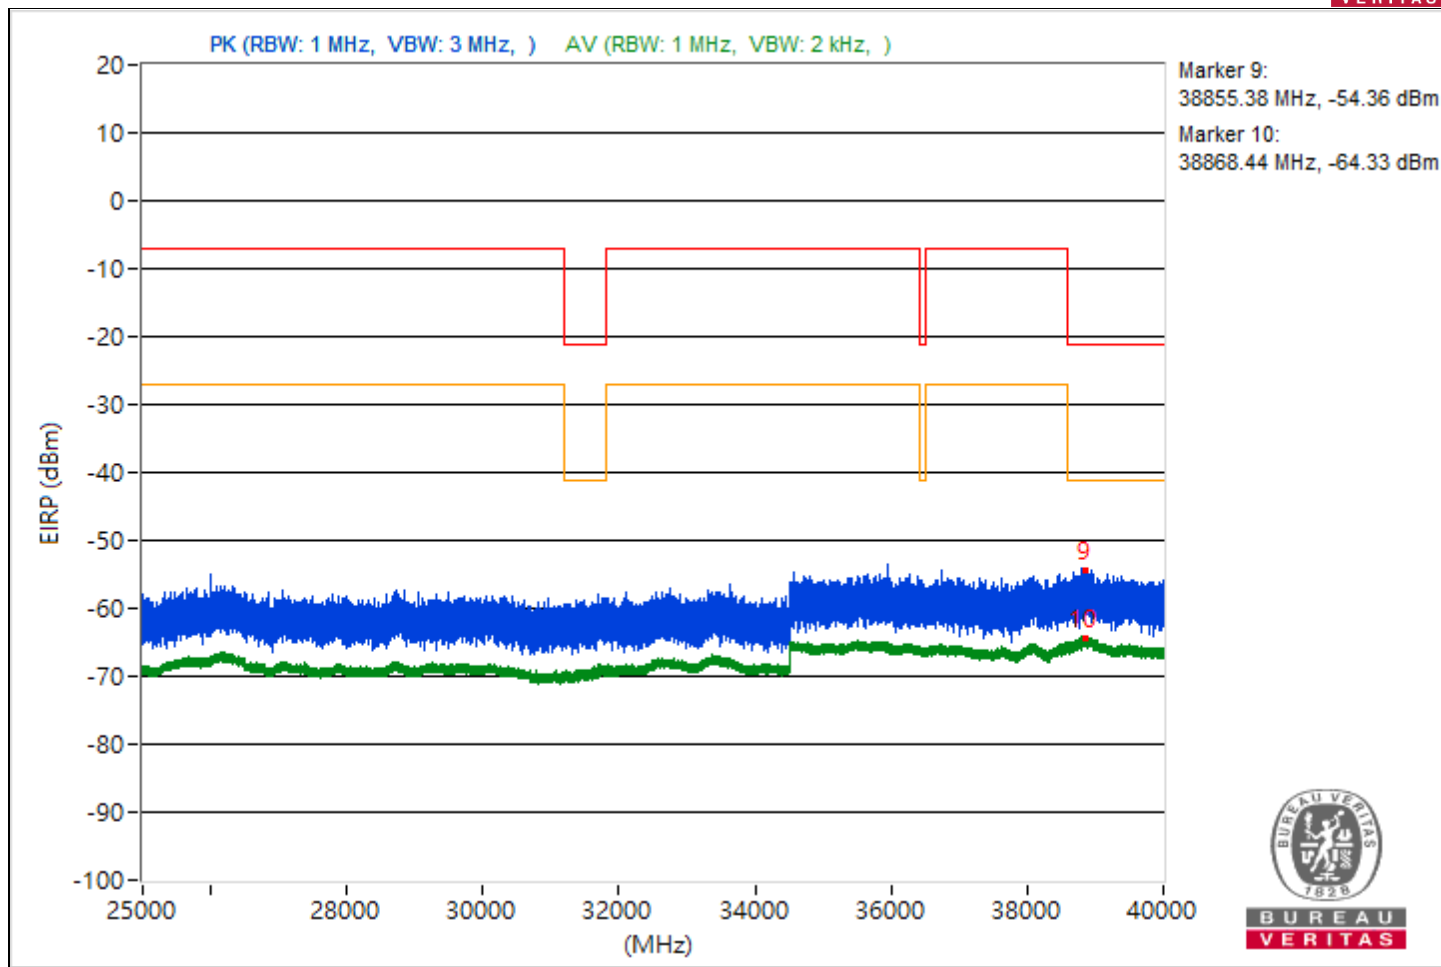


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.53	46.4 PK	74	-27.6	-58.9	-55.38	4.92	-48.86
2	3782.34	35.75 AV	54	-18.25	-66.95	-67.99	4.92	-59.51
3	15492.36	45.56 PK	74	-28.44	-56.49	-59.18	4.92	-49.7
4	14489.96	34.82 AV	54	-19.18	-68.77	-68.01	4.92	-60.44
5	20890.4	47.55 PK	74	-26.45	-54.37	-57.45	4.92	-47.71
6	21111.2	36.8 AV	54	-17.2	-66.64	-66.16	4.92	-58.46
7	22540.7	48.11 PK	74	-25.89	-57.92	-53.38	4.92	-47.15
8	22360.4	37.81 AV	54	-16.19	-65.99	-64.84	4.92	-57.45
9	38932.18	41.09 PK	74	-32.91	-60.22	-65.49	4.92	-54.17
10	38865.24	30.99 AV	54	-23.01	-72.66	-71.79	4.92	-64.27

Note: Margin value = Emission Level - Limit value

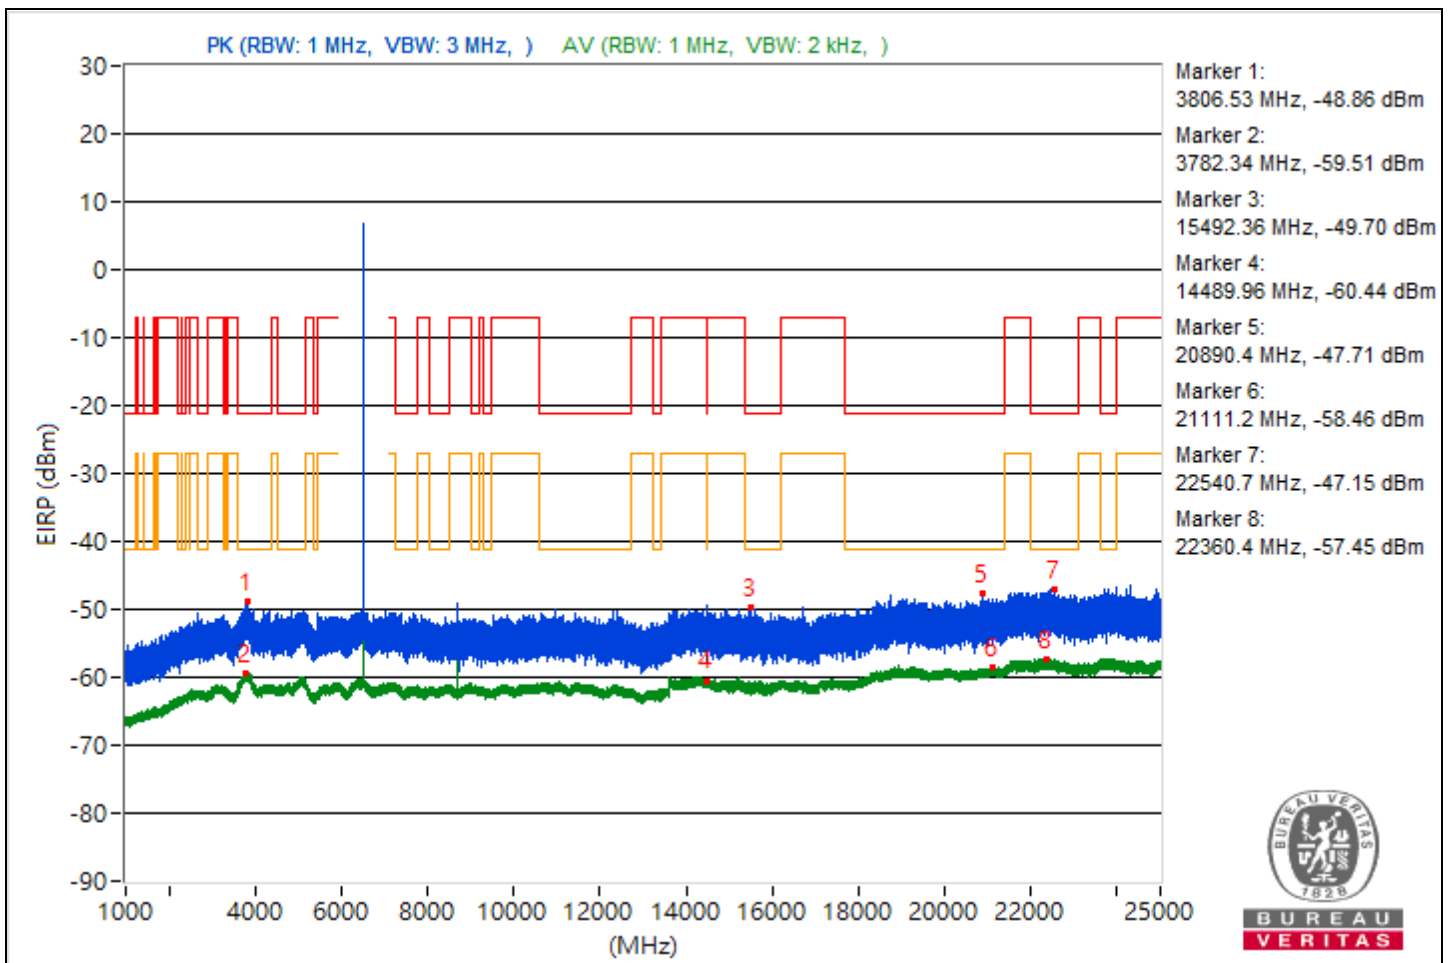


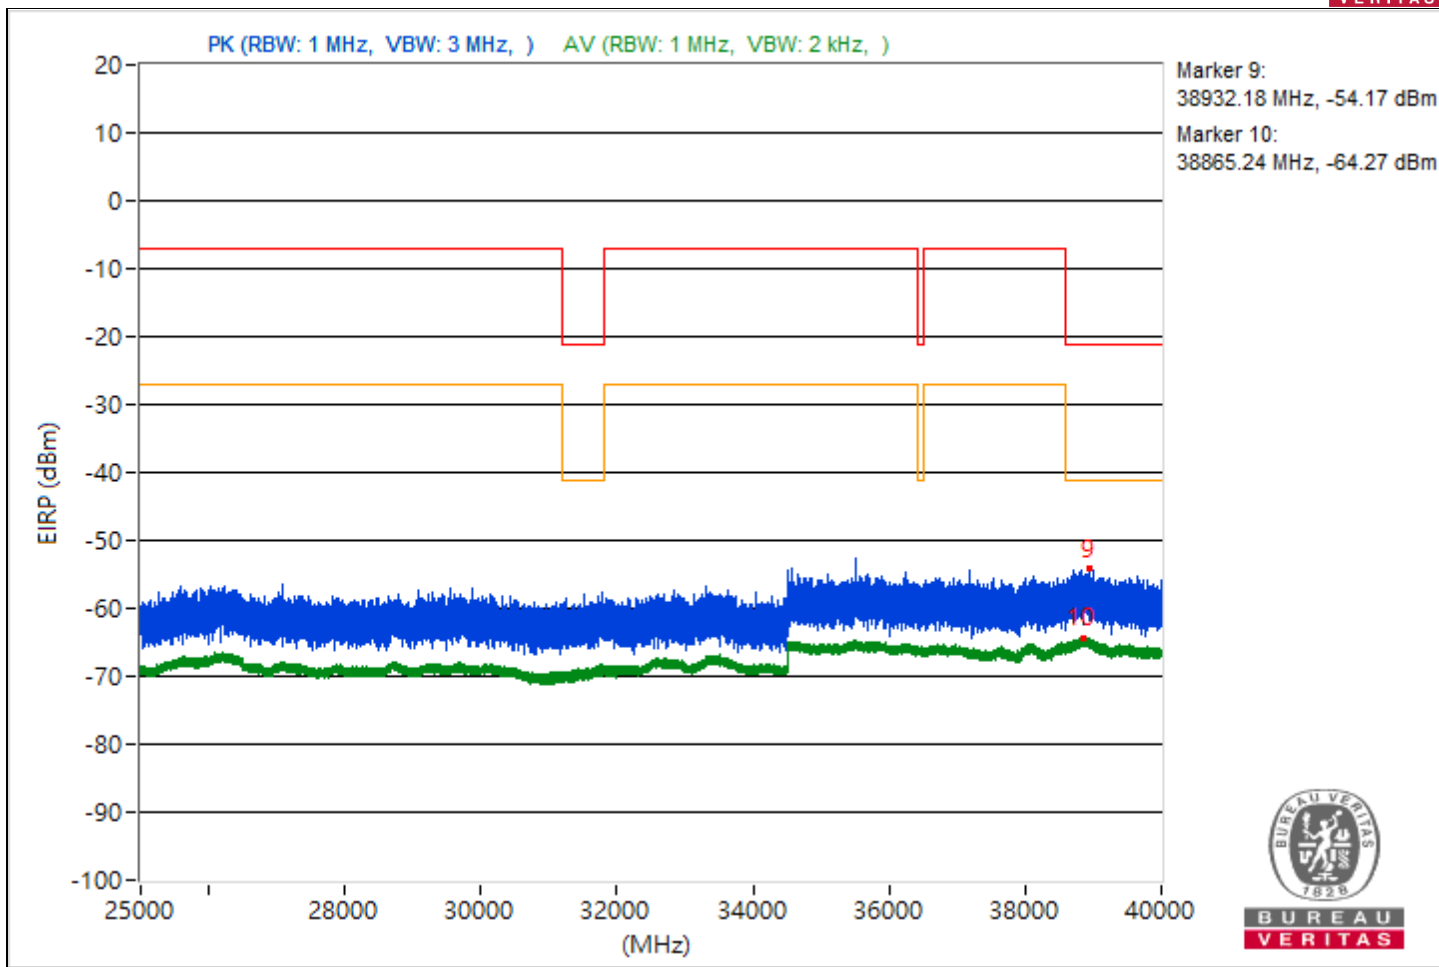


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.37	45.9 PK	74	-28.1	-61.37	-55.22	4.92	-49.36
2	3817.97	35.87 AV	54	-18.13	-66.98	-67.68	4.92	-59.39
3	15670.67	44.19 PK	74	-29.81	-63.4	-56.86	4.92	-51.07
4	14478.31	34.48 AV	54	-19.52	-68.31	-69.17	4.92	-60.78
5	19125.9	47.15 PK	74	-26.85	-54.11	-59.6	4.92	-48.11
6	21136.5	36.75 AV	54	-17.25	-66.03	-66.89	4.92	-58.51
7	22458.5	48.96 PK	74	-25.04	-53.65	-54.9	4.92	-46.3
8	22499.4	38.02 AV	54	-15.98	-64.74	-65.66	4.92	-57.24
9	38986.31	40.92 PK	74	-33.08	-67	-60.06	4.92	-54.34
10	38923.73	30.94 AV	54	-23.06	-71.63	-72.98	4.92	-64.32

Note: Margin value = Emission Level - Limit value

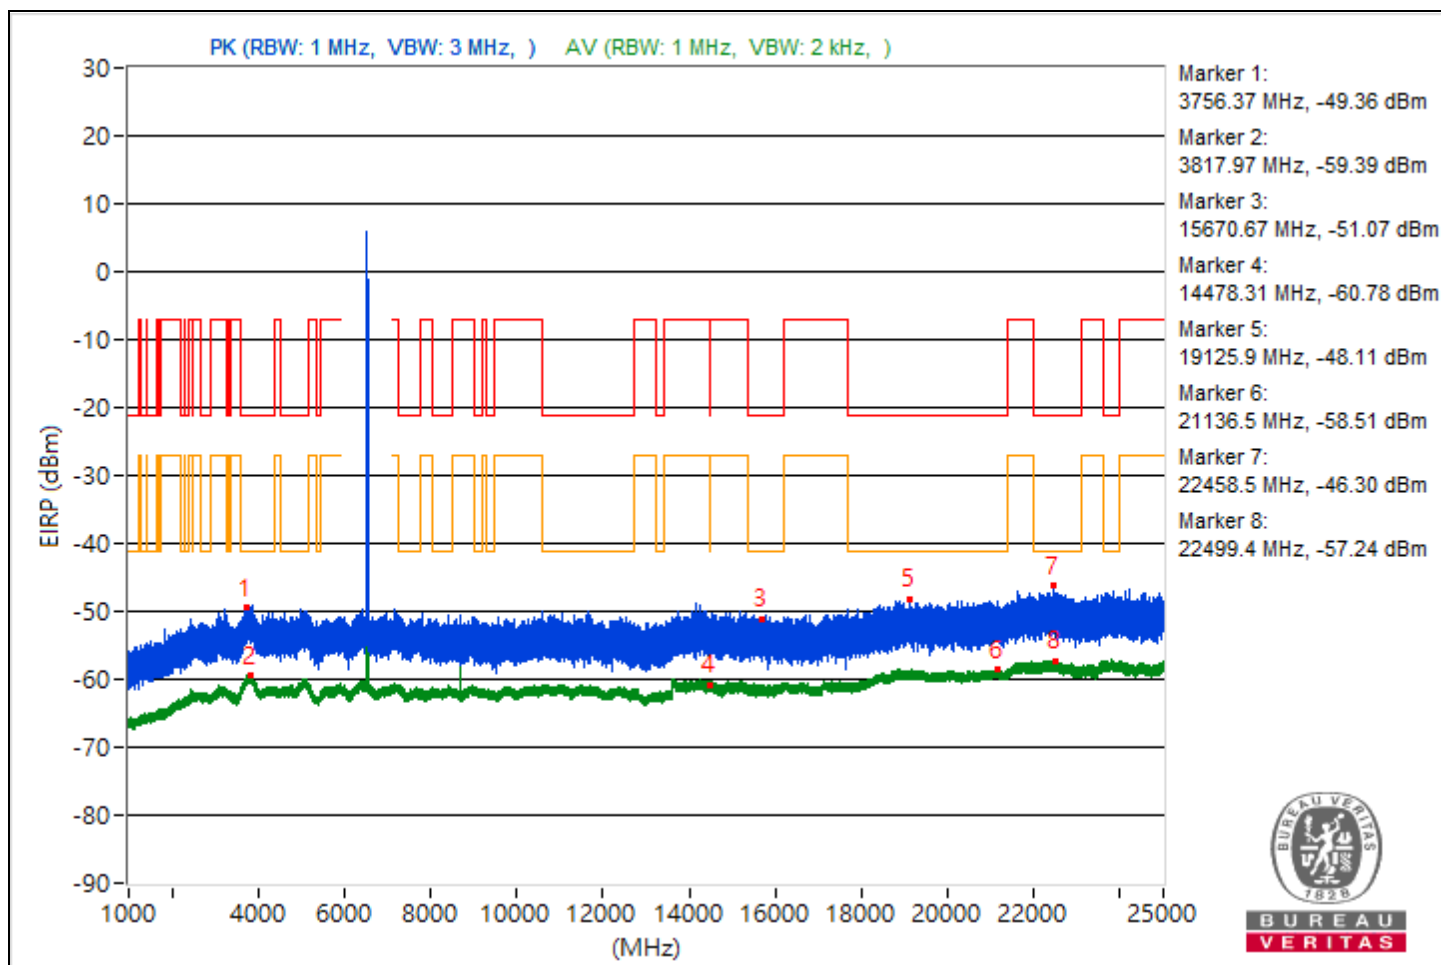


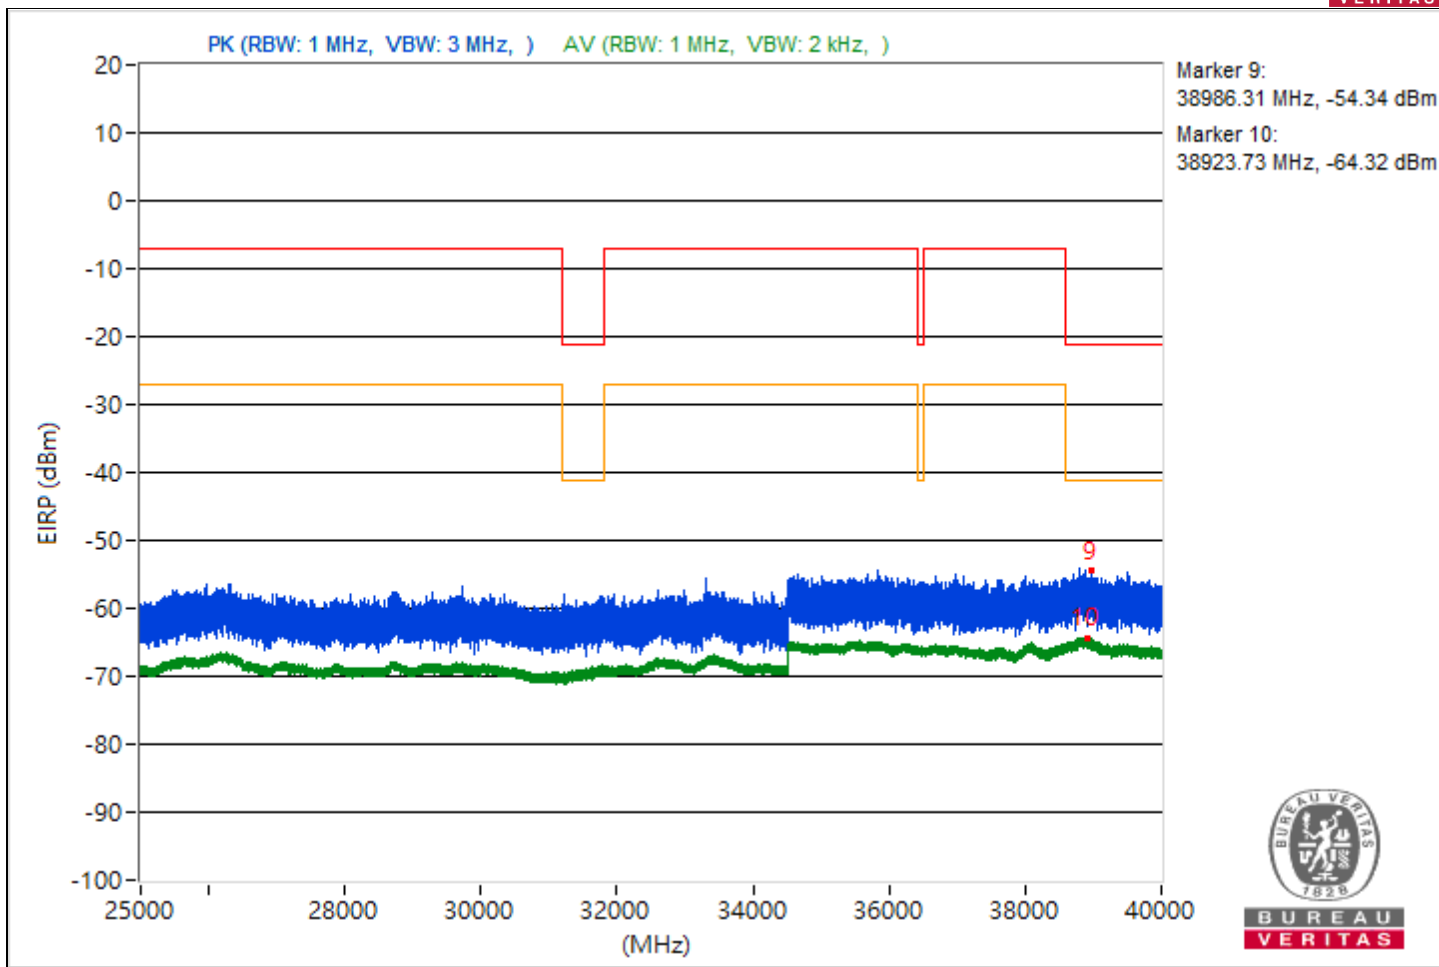


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3812.52	46.7 PK	74	-27.3	-55.35	-58.05	4.92	-48.56
2	3817.89	35.88 AV	54	-18.12	-66.95	-67.71	4.92	-59.38
3	7293.62	45.19 PK	74	-28.81	-60.03	-56.62	4.92	-50.07
4	14471.2	34.66 AV	54	-19.34	-69.1	-68.02	4.92	-60.6
5	20165.4	47.22 PK	74	-26.78	-54.35	-58.61	4.92	-48.04
6	21050.1	36.54 AV	54	-17.46	-65.94	-67.51	4.92	-58.72
7	22578.2	48.04 PK	74	-25.96	-60.18	-52.88	4.92	-47.22
8	23753.8	38.07 AV	54	-15.93	-65.6	-64.69	4.92	-57.19
9	38971.38	40.81 PK	74	-33.19	-64.48	-60.97	4.92	-54.45
10	38933.16	30.78 AV	54	-23.22	-73.03	-71.86	4.92	-64.48

Note: Margin value = Emission Level - Limit value

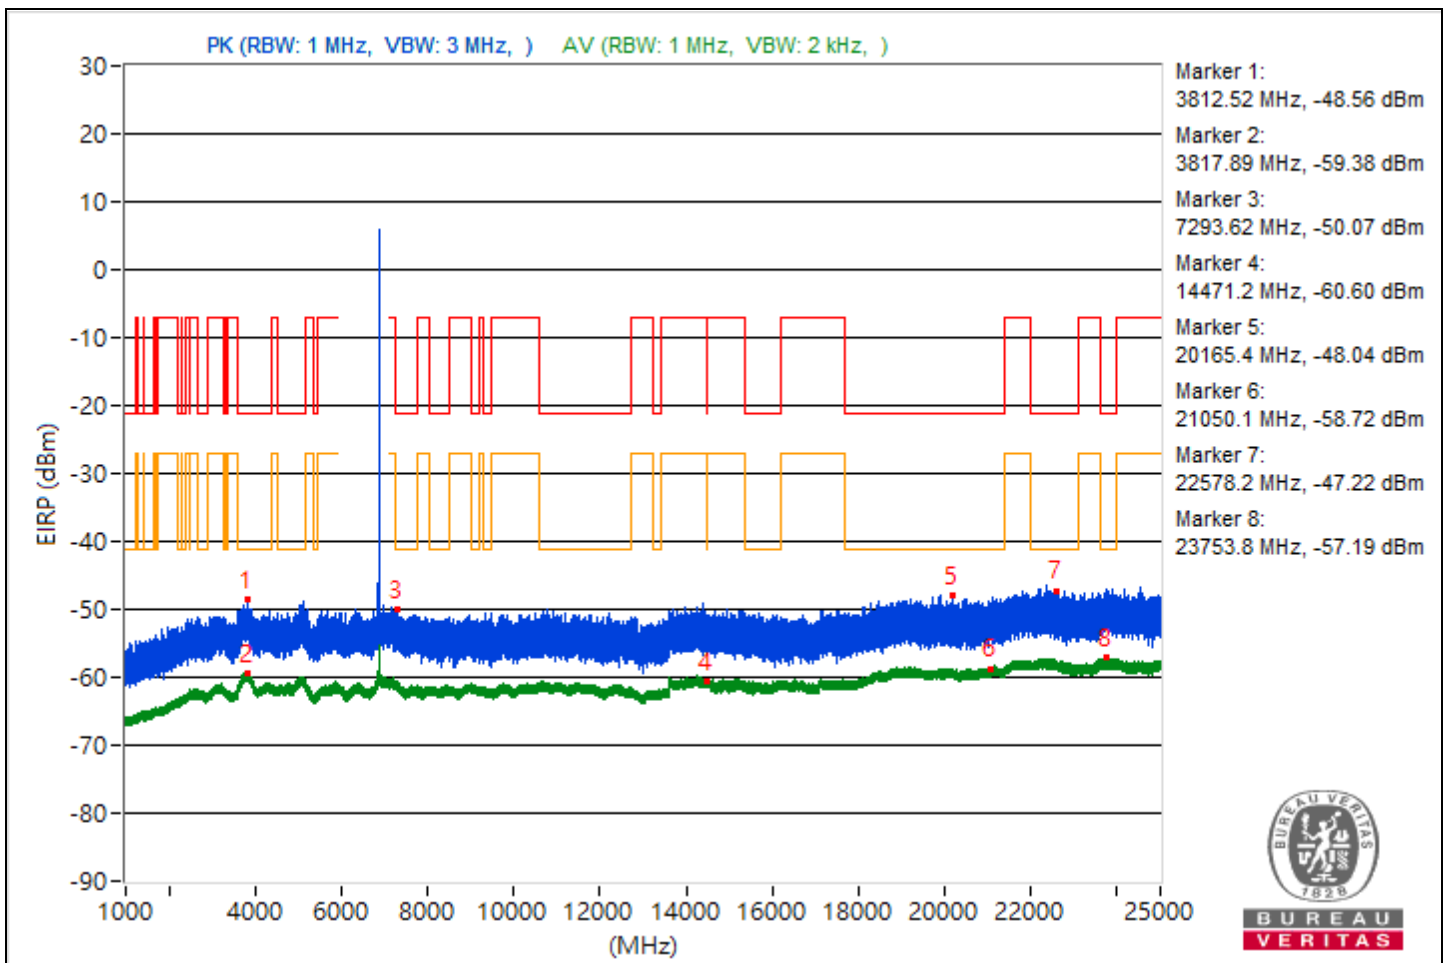


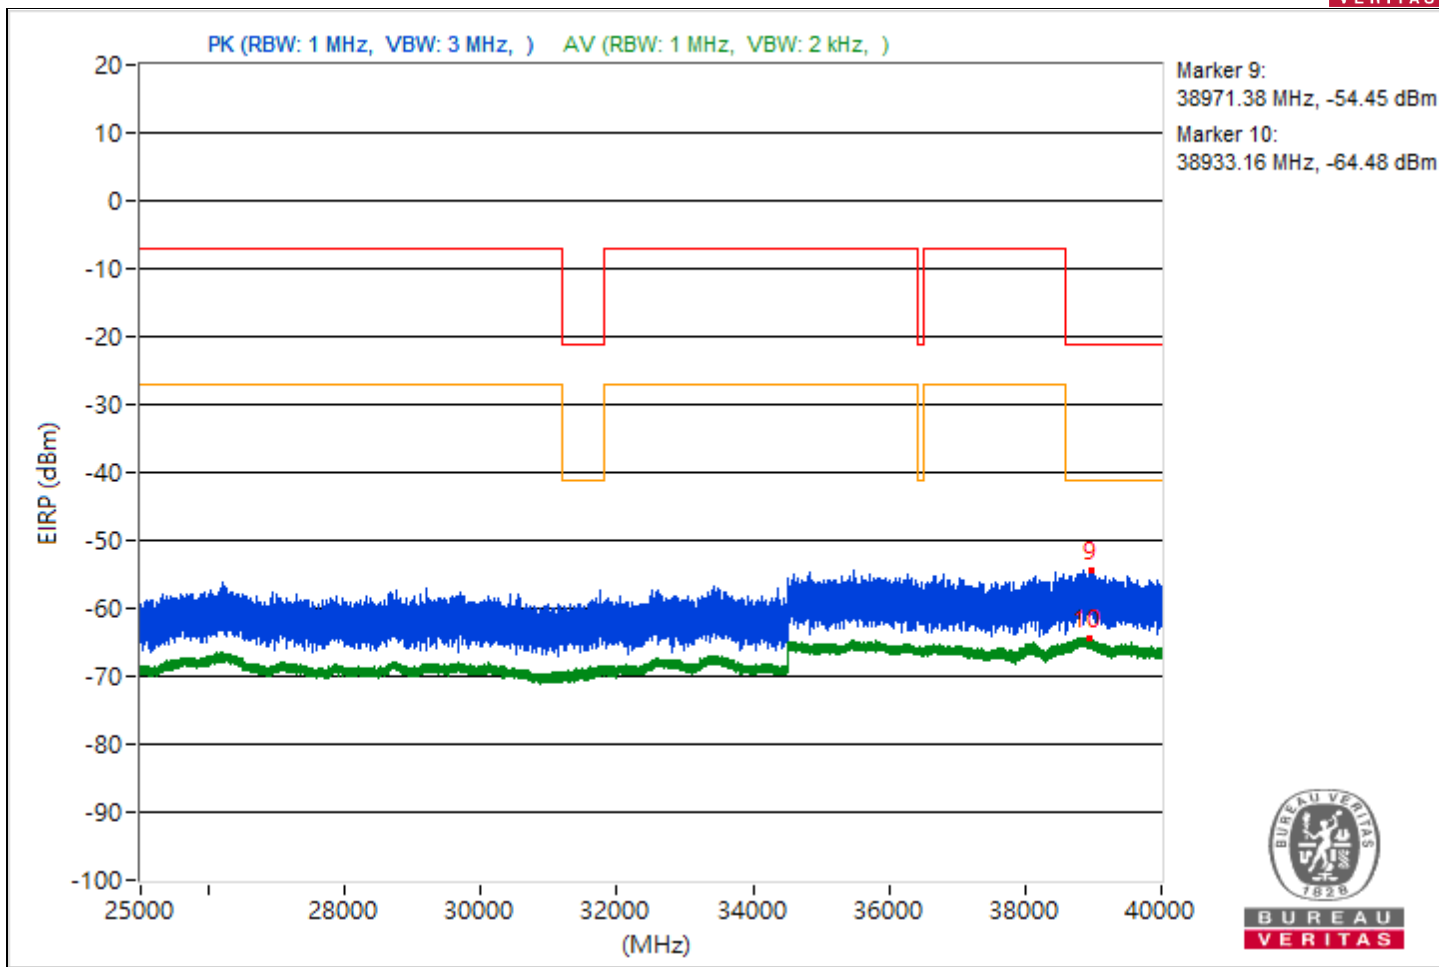


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.82	45.9 PK	74	-28.1	-62.13	-55.06	4.92	-49.36
2	3806.07	35.78 AV	54	-18.22	-67.97	-66.93	4.92	-59.48
3	7285.38	45.09 PK	74	-28.91	-60.92	-56.4	4.92	-50.17
4	7268.11	35.17 AV	54	-18.83	-68.36	-67.7	4.92	-60.09
5	20901.5	47.19 PK	74	-26.81	-54.45	-58.43	4.92	-48.07
6	21161.7	36.88 AV	54	-17.12	-66.67	-65.98	4.92	-58.38
7	22326.3	48.52 PK	74	-25.48	-56.29	-53.48	4.92	-46.74
8	22224.8	37.95 AV	54	-16.05	-64.7	-65.85	4.92	-57.31
9	38781.42	40.68 PK	74	-33.32	-64.3	-61.25	4.92	-54.58
10	38851.02	30.99 AV	54	-23.01	-71.77	-72.67	4.92	-64.27

Note: Margin value = Emission Level - Limit value

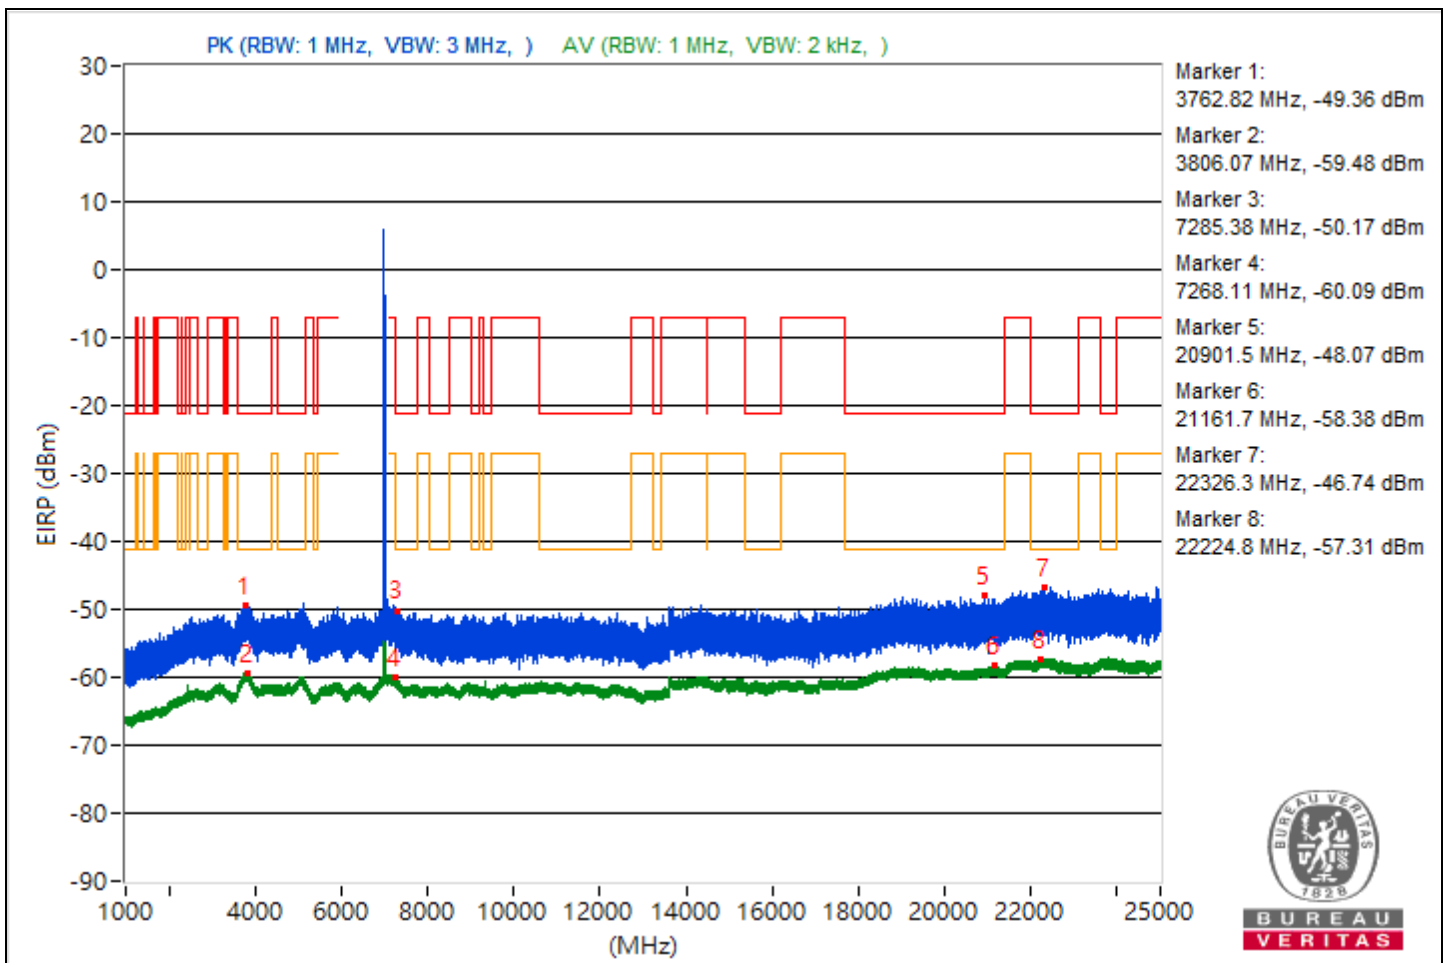


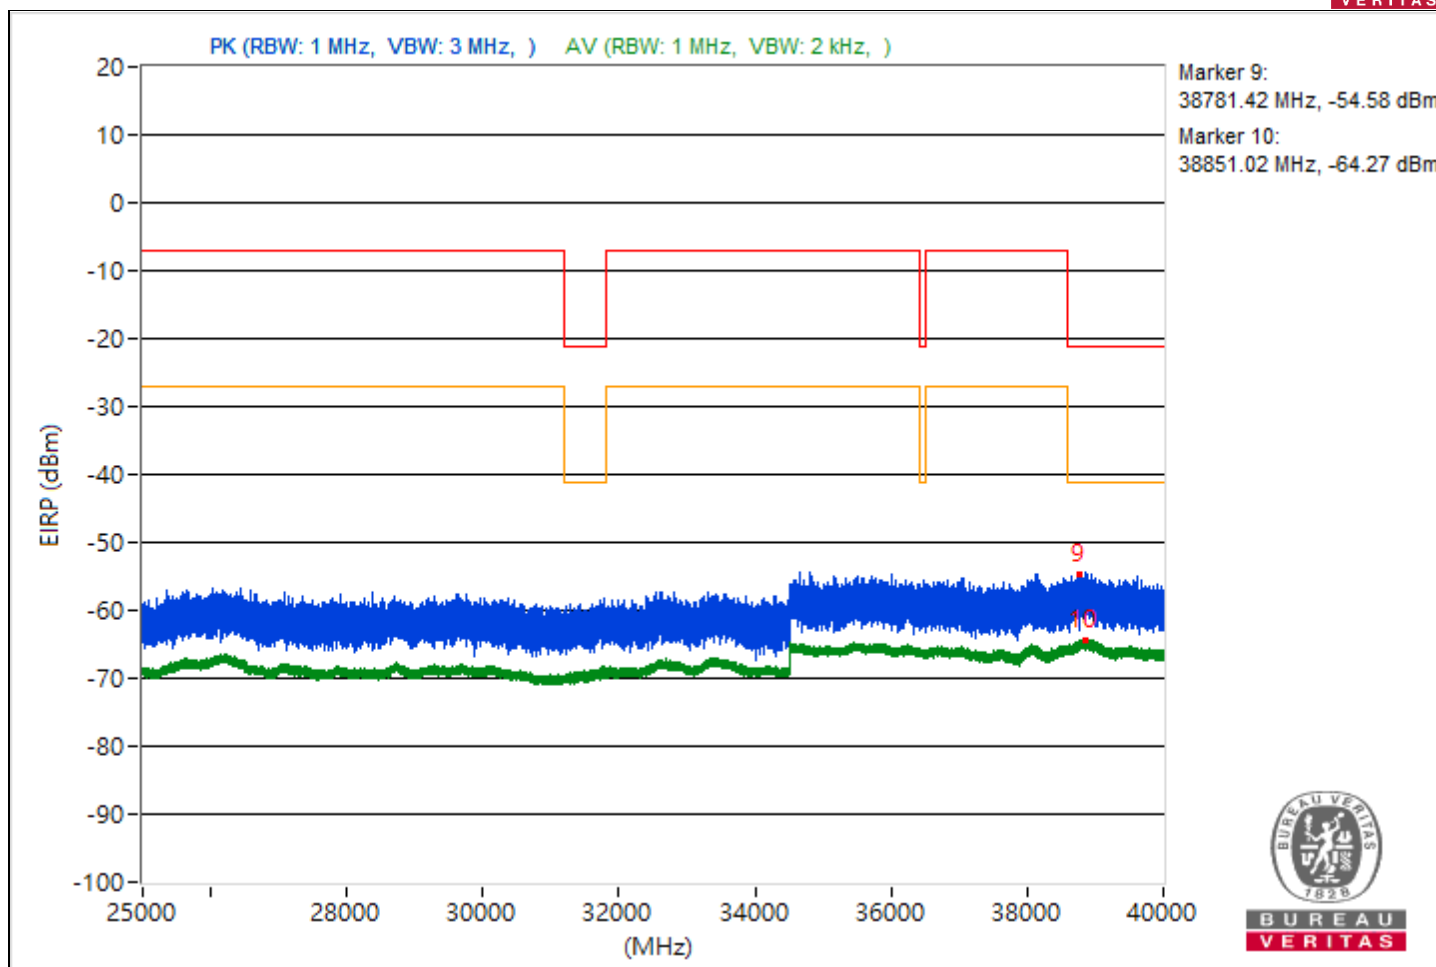


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.4	46.96 PK	74	-27.04	-55.17	-57.64	4.92	-48.3
2	3836.24	35.85 AV	54	-18.15	-67.84	-66.9	4.92	-59.41
3	9064.62	44.92 PK	74	-29.08	-56.5	-61.29	4.92	-50.34
4	7257.61	35.46 AV	54	-18.54	-68.18	-67.32	4.92	-59.8
5	20140.4	47.19 PK	74	-26.81	-59.86	-53.99	4.92	-48.07
6	21147.8	36.85 AV	54	-17.15	-66.64	-66.06	4.92	-58.41
7	23910	49.15 PK	74	-24.85	-55.42	-53	4.92	-46.11
8	23671.9	38.1 AV	54	-15.9	-65.67	-64.58	4.92	-57.16
9	38771.47	41.83 PK	74	-32.17	-63.84	-59.79	4.92	-53.43
10	38862.93	30.92 AV	54	-23.08	-71.78	-72.84	4.92	-64.34

Note: Margin value = Emission Level - Limit value

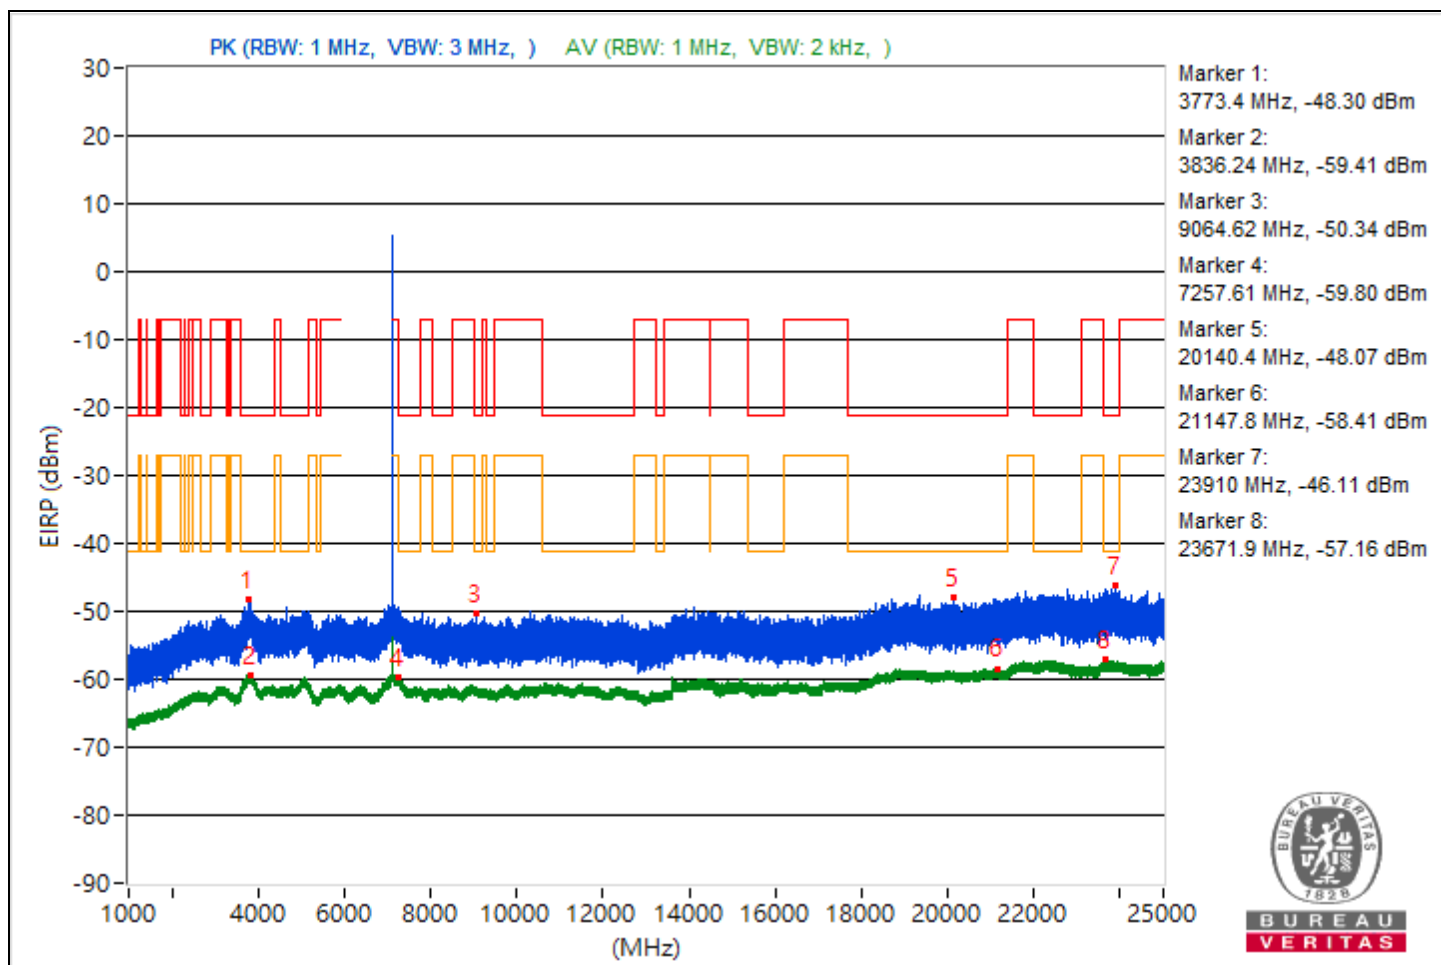


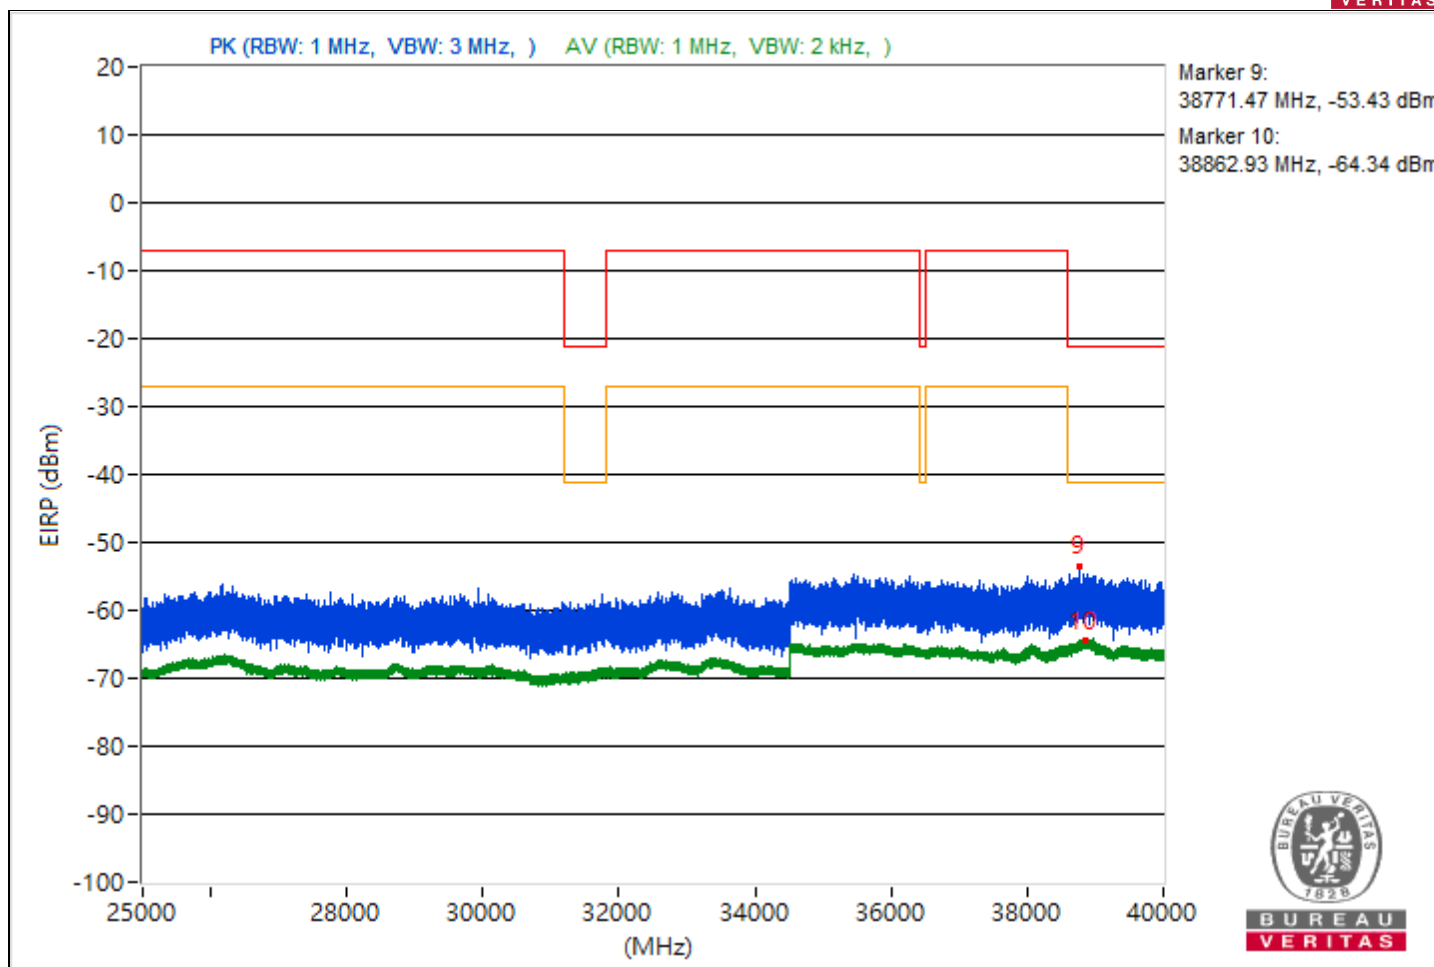


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3806.22	46.97 PK	74	-27.03	-54.45	-59.27	4.92	-48.29
2	3828.47	35.77 AV	54	-18.23	-68	-66.9	4.92	-59.49
3	14493.51	45.2 PK	74	-28.8	-56.17	-61.16	4.92	-50.06
4	15722.67	34.47 AV	54	-19.53	-68.25	-69.25	4.92	-60.79
5	19070.2	46.9 PK	74	-27.1	-60.91	-54.1	4.92	-48.36
6	21159.6	36.56 AV	54	-17.44	-66.07	-67.27	4.92	-58.7
7	22616.7	47.72 PK	74	-26.28	-58.98	-53.56	4.92	-47.54
8	23873.4	37.94 AV	54	-16.06	-65.76	-64.79	4.92	-57.32
9	38978.4	40.88 PK	74	-33.12	-66.68	-60.17	4.92	-54.38
10	38836	30.97 AV	54	-23.03	-72.7	-71.79	4.92	-64.29

Note: Margin value = Emission Level - Limit value

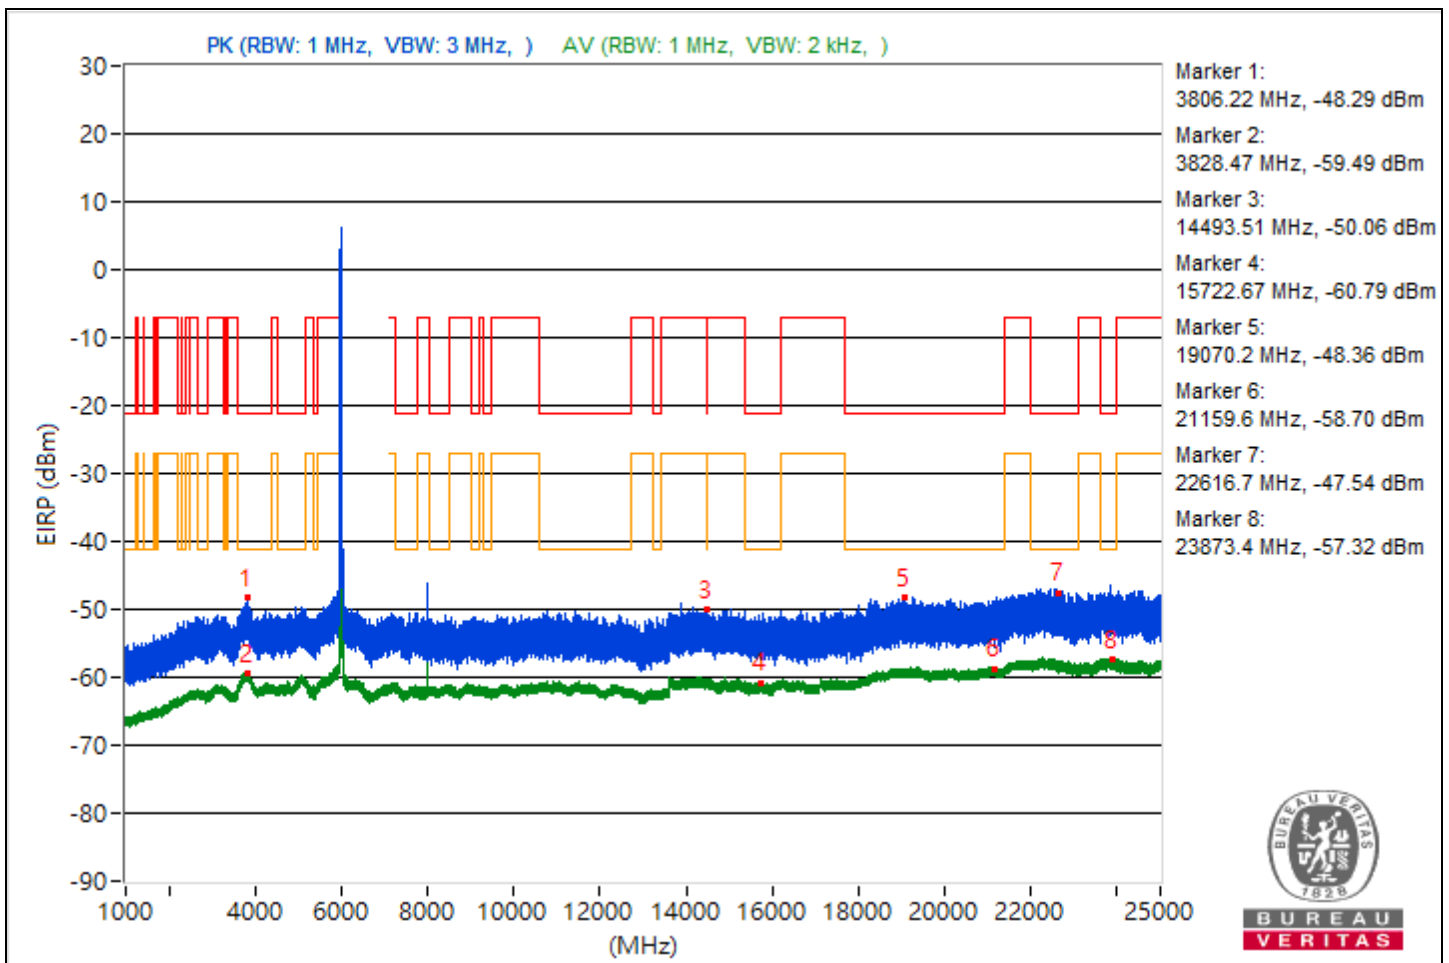


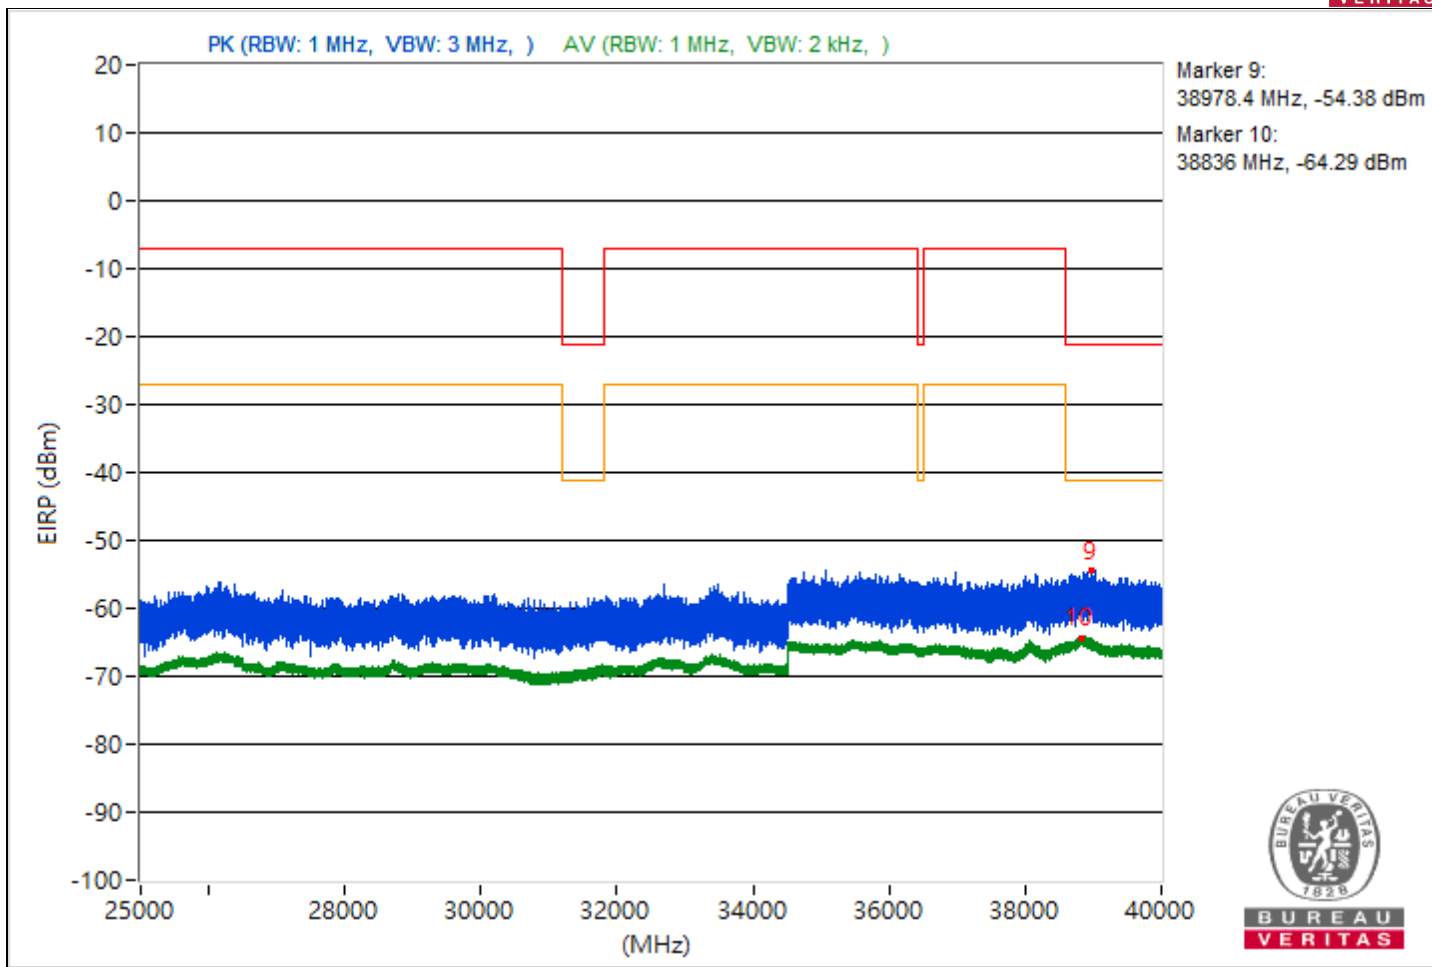


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.13	45.69 PK	74	-28.31	-55.95	-59.92	4.92	-49.57
2	3783.82	36.03 AV	54	-17.97	-67.49	-66.85	4.92	-59.23
3	10736.8	44.76 PK	74	-29.24	-62.33	-56.41	4.92	-50.5
4	14485.51	35.07 AV	54	-18.93	-68.35	-67.91	4.92	-60.19
5	20086.1	47.56 PK	74	-26.44	-53.62	-59.48	4.92	-47.7
6	20153.1	36.71 AV	54	-17.29	-66.98	-66.03	4.92	-58.55
7	23780.2	48.14 PK	74	-25.86	-60.49	-52.71	4.92	-47.12
8	23767.1	38.05 AV	54	-15.95	-65.89	-64.5	4.92	-57.21
9	38874.4	41.18 PK	74	-32.82	-64.86	-60.3	4.92	-54.08
10	38896.98	30.82 AV	54	-23.18	-71.75	-73.08	4.92	-64.44

Note: Margin value = Emission Level - Limit value

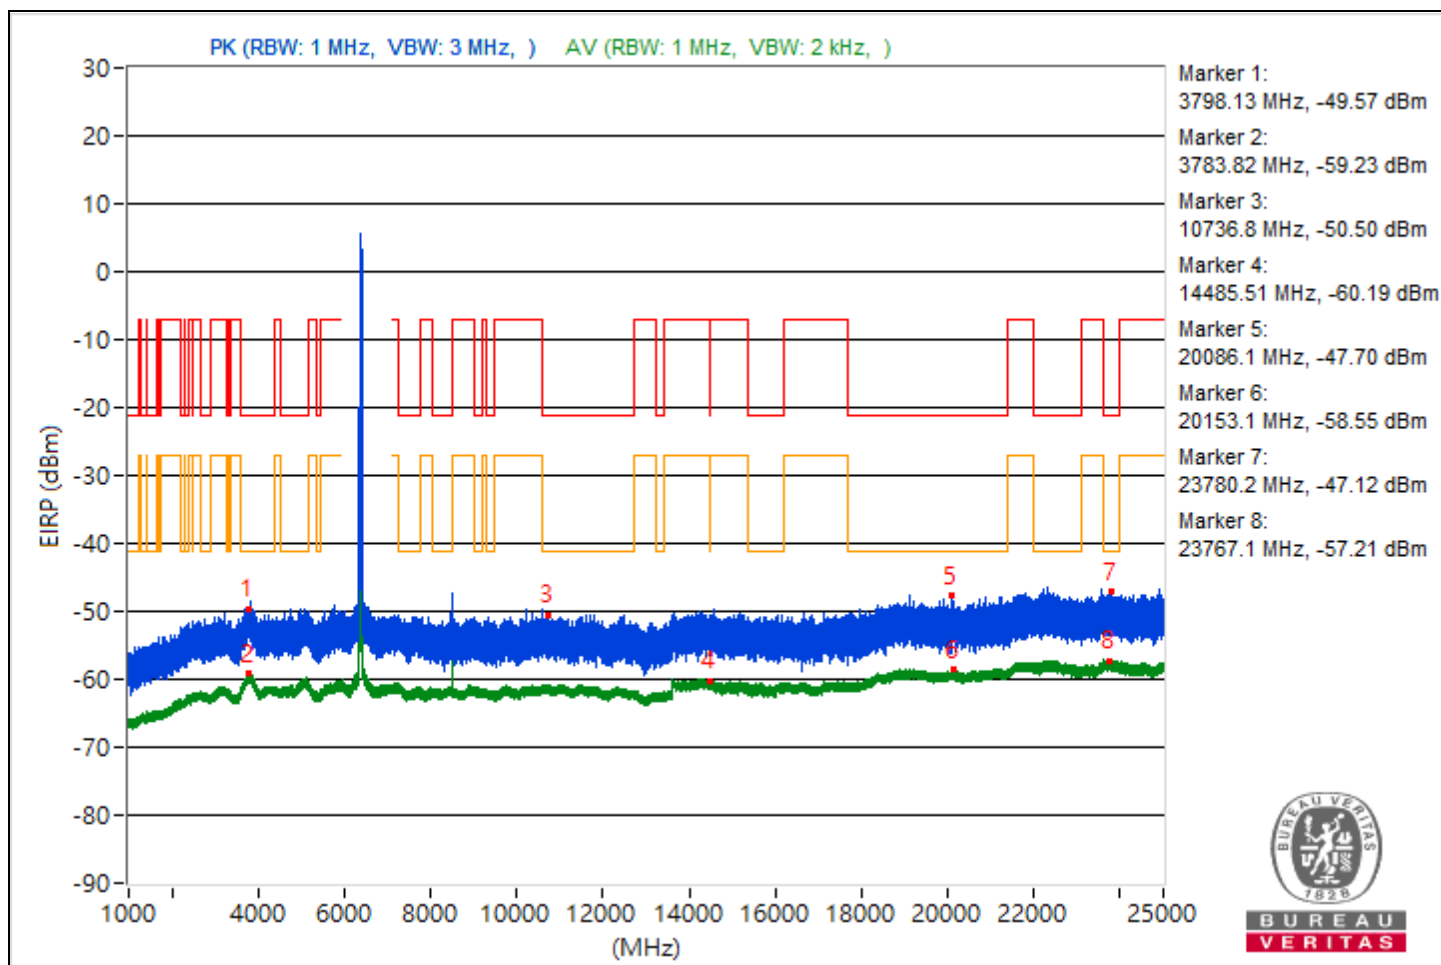


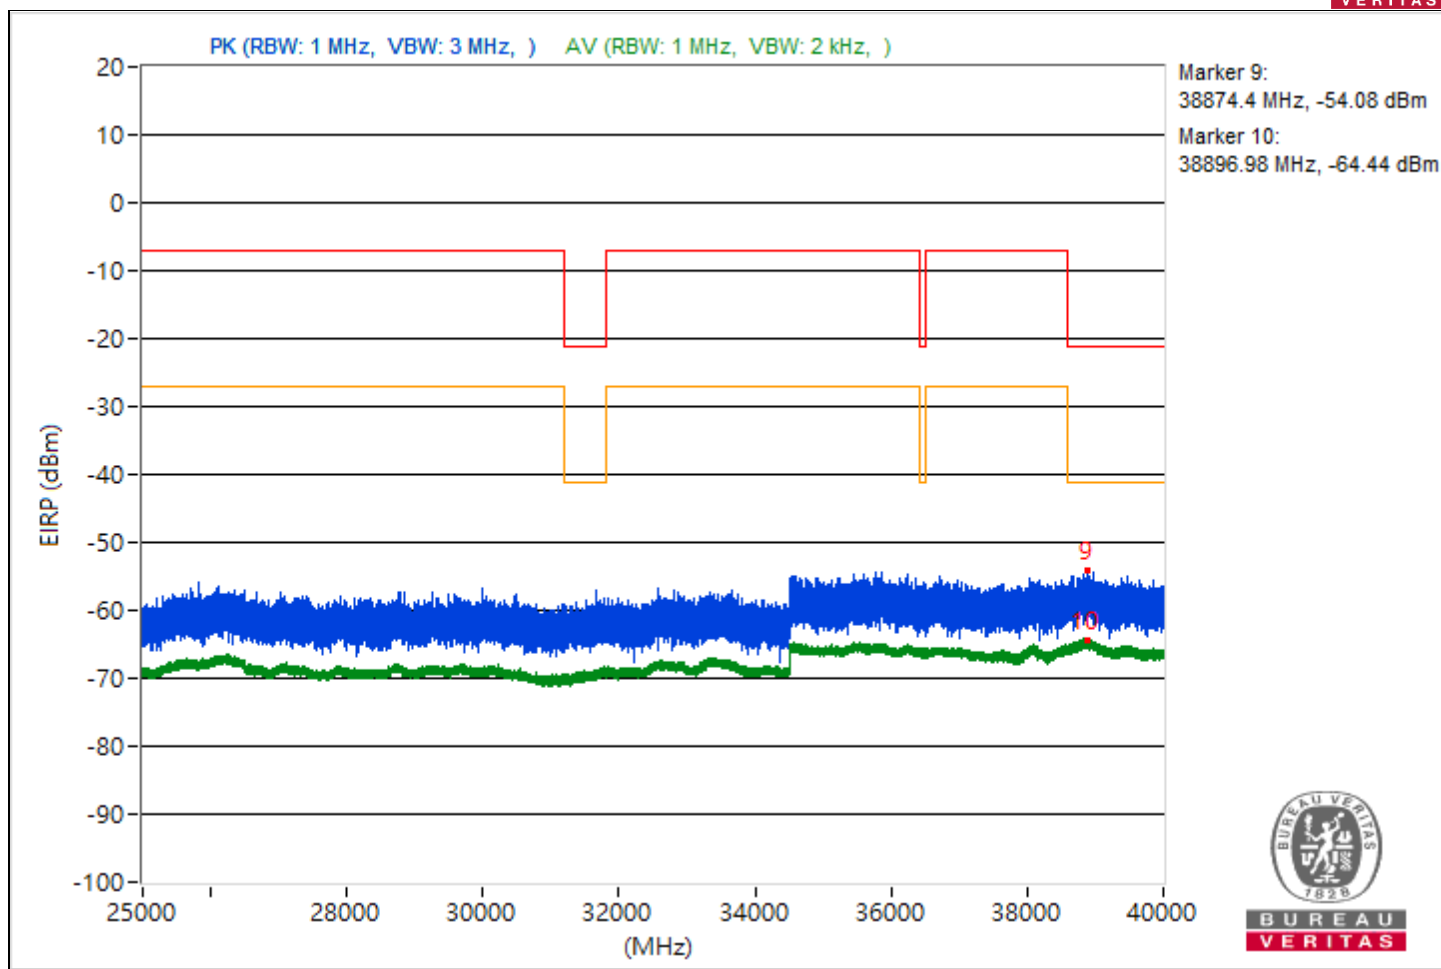


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3869.77	46.29 PK	74	-27.71	-61	-54.83	4.92	-48.97
2	3782.19	35.76 AV	54	-18.24	-66.96	-67.95	4.92	-59.5
3	11608.98	45.03 PK	74	-28.97	-56.31	-61.45	4.92	-50.23
4	14477.69	34.68 AV	54	-19.32	-68.92	-68.13	4.92	-60.58
5	19284.4	47.64 PK	74	-26.36	-60.23	-53.35	4.92	-47.62
6	19317.7	36.83 AV	54	-17.17	-66.69	-66.05	4.92	-58.43
7	22327.3	48.77 PK	74	-25.23	-59.38	-52.17	4.92	-46.49
8	23769	38.03 AV	54	-15.97	-65.89	-64.54	4.92	-57.23
9	38894.22	41.1 PK	74	-32.9	-66.23	-60.01	4.92	-54.16
10	38892.18	31.05 AV	54	-22.95	-72.46	-71.85	4.92	-64.21

Note: Margin value = Emission Level - Limit value

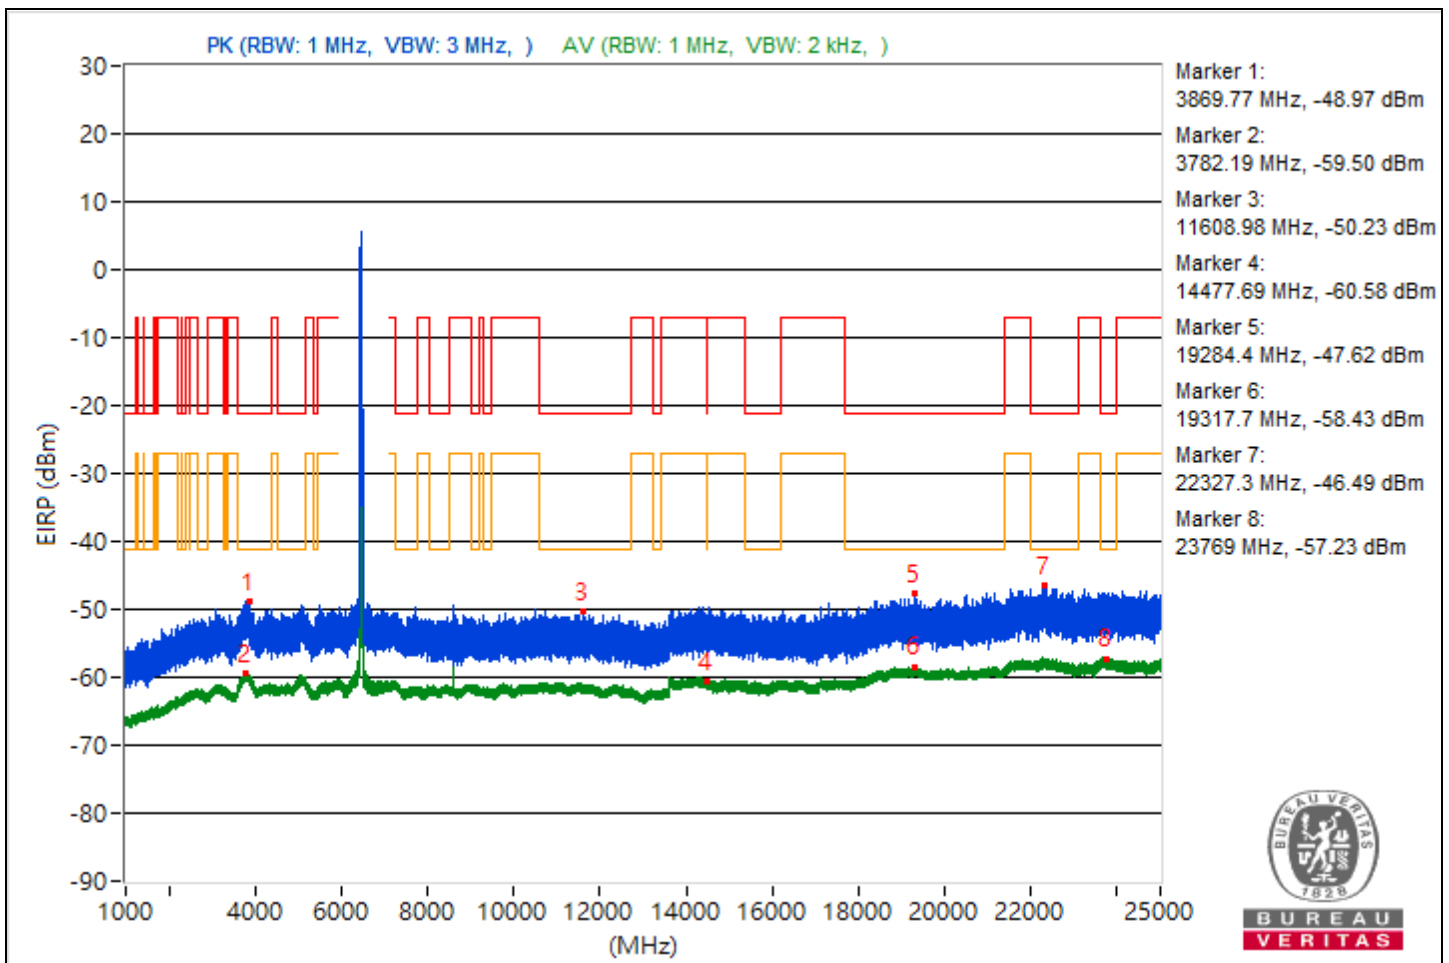


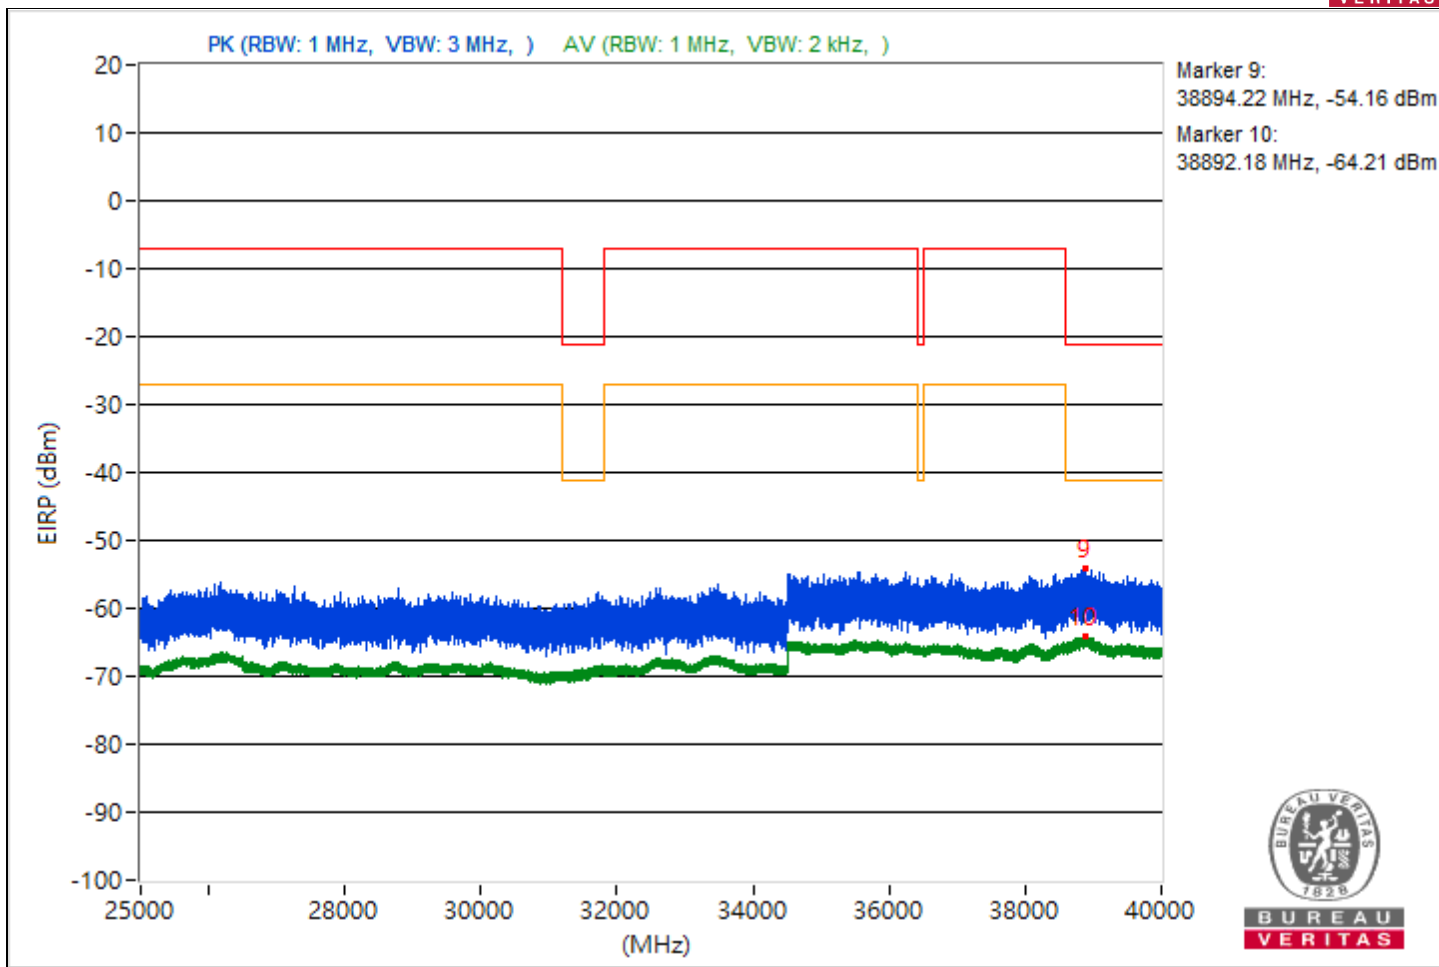


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3885.71	46.15 PK	74	-27.85	-55.09	-60.71	4.92	-49.11
2	3808.4	36.01 AV	54	-17.99	-66.89	-67.5	4.92	-59.25
3	7559.16	44.45 PK	74	-29.55	-61.78	-56.97	4.92	-50.81
4	14478.67	34.69 AV	54	-19.31	-68.03	-69.02	4.92	-60.57
5	18566	48.04 PK	74	-25.96	-52.92	-59.95	4.92	-47.22
6	21105.6	36.79 AV	54	-17.21	-67.04	-65.84	4.92	-58.47
7	22581.2	49.2 PK	74	-24.8	-52.72	-55.81	4.92	-46.06
8	23670.2	38.01 AV	54	-15.99	-65.78	-64.66	4.92	-57.25
9	38896.62	40.77 PK	74	-33.23	-65.16	-60.75	4.92	-54.49
10	38872.98	31.06 AV	54	-22.94	-71.72	-72.58	4.92	-64.2

Note: Margin value = Emission Level - Limit value

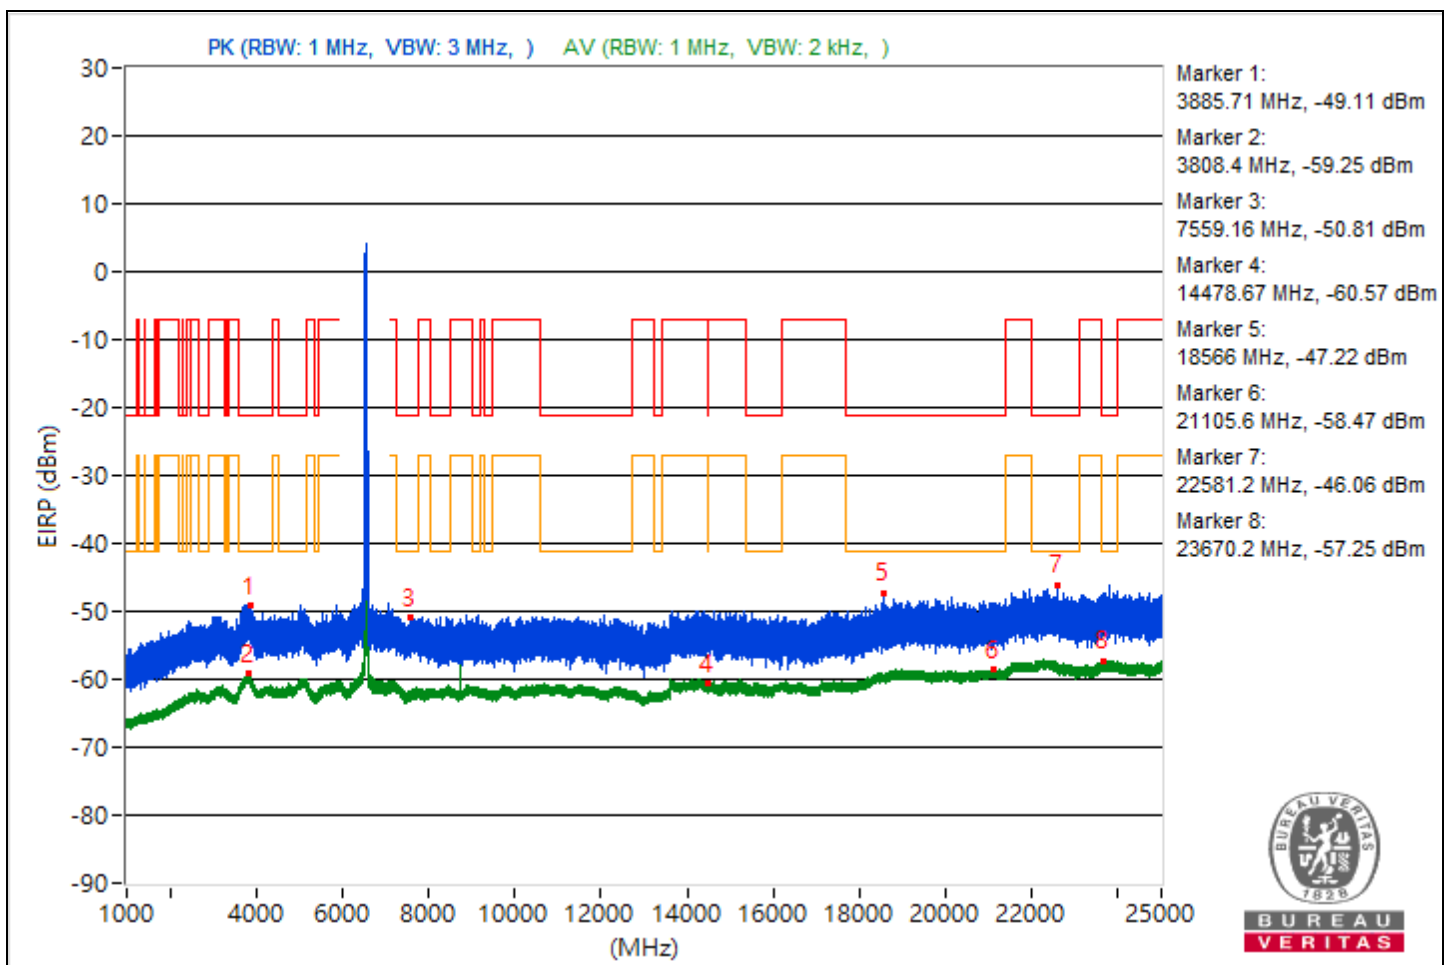


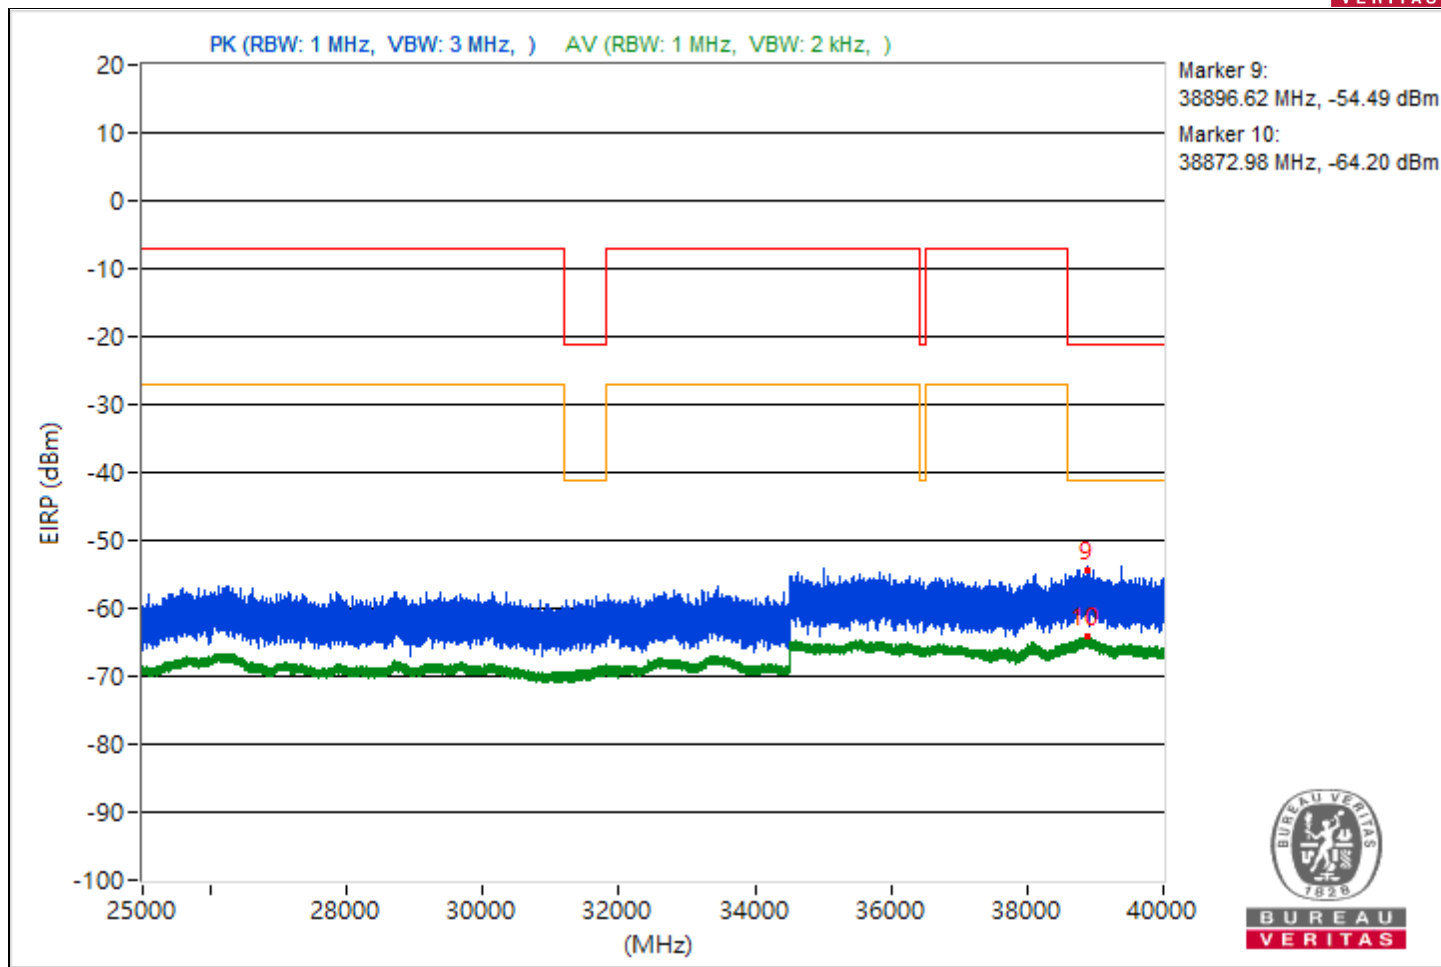


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5059.84	45.89 PK	74	-28.11	-55.53	-60.33	4.92	-49.37
2	3789.89	35.98 AV	54	-18.02	-66.67	-67.83	4.92	-59.28
3	12342.76	45.04 PK	74	-28.96	-63.63	-55.81	4.92	-50.22
4	7251.47	35.13 AV	54	-18.87	-67.43	-68.8	4.92	-60.13
5	18884.9	47.28 PK	74	-26.72	-61.33	-53.57	4.92	-47.98
6	21166.4	36.67 AV	54	-17.33	-65.96	-67.17	4.92	-58.59
7	23793	48.36 PK	74	-25.64	-59.37	-52.66	4.92	-46.9
8	23873.5	37.97 AV	54	-16.03	-65.63	-64.85	4.92	-57.29
9	38849.07	40.75 PK	74	-33.25	-60.42	-66.34	4.92	-54.51
10	38836.18	31.28 AV	54	-22.72	-72.2	-71.63	4.92	-63.98

Note: Margin value = Emission Level - Limit value

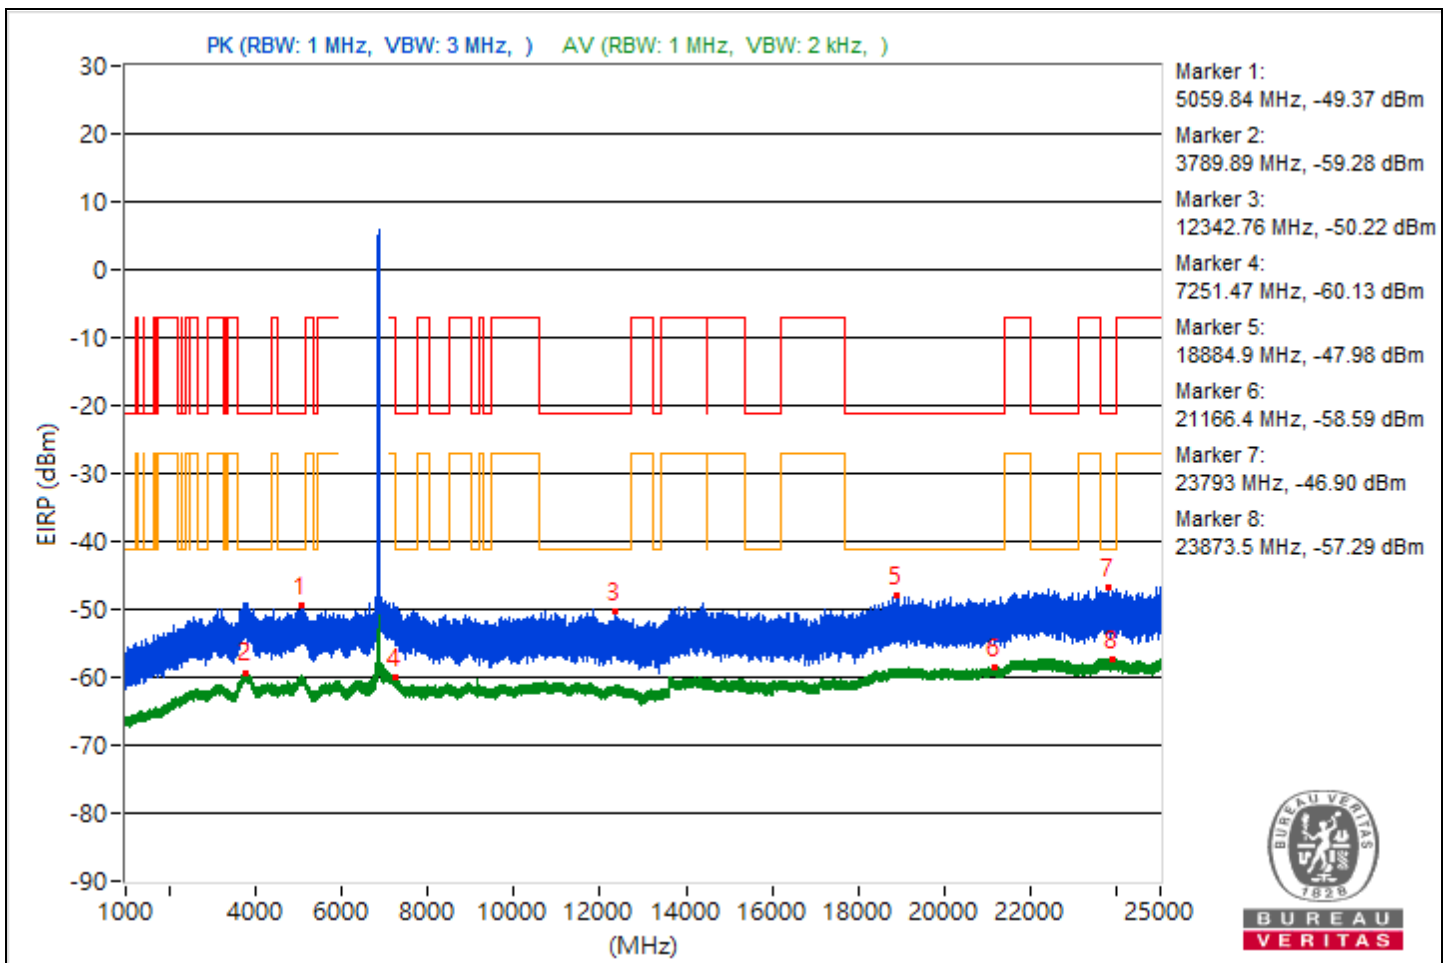


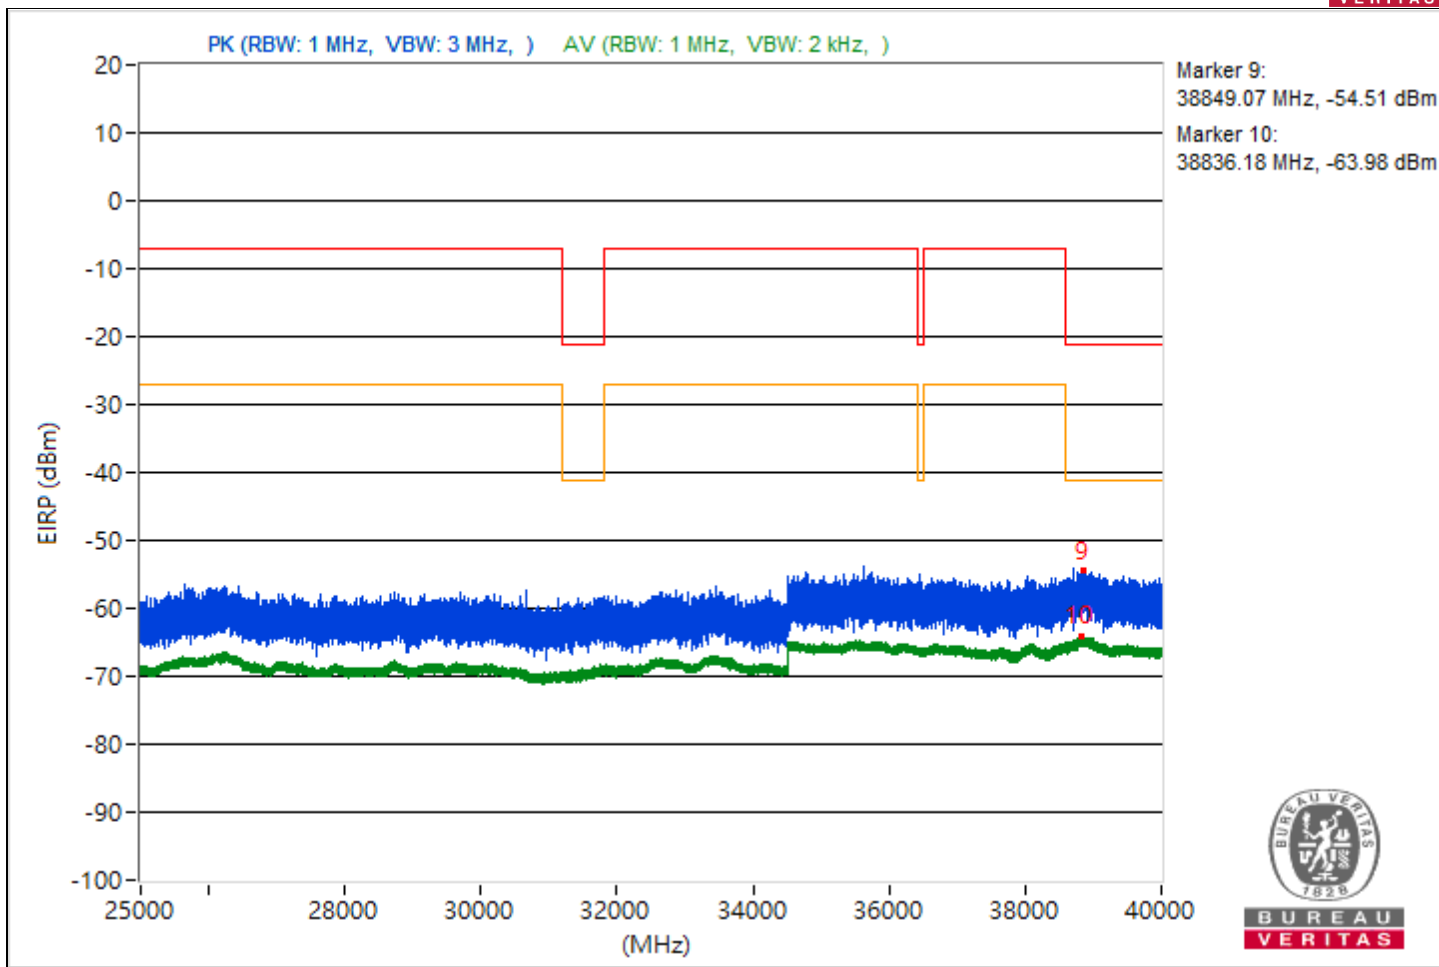


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.47	47.18 PK	74	-26.82	-54.89	-57.53	4.92	-48.08
2	3833.52	35.98 AV	54	-18.02	-67.01	-67.43	4.92	-59.28
3	10975.2	45.3 PK	74	-28.7	-55.82	-61.99	4.92	-49.96
4	7281.02	35.36 AV	54	-18.64	-66.79	-69.21	4.92	-59.9
5	20701.7	47.02 PK	74	-26.98	-54.26	-59.67	4.92	-48.24
6	21394.8	36.83 AV	54	-17.17	-66.75	-66.01	4.92	-58.43
7	22471.7	48.54 PK	74	-25.46	-61.06	-52.17	4.92	-46.72
8	22287.2	37.95 AV	54	-16.05	-65.83	-64.71	4.92	-57.31
9	39038.04	41.16 PK	74	-32.84	-60.24	-65.14	4.92	-54.1
10	38891.02	31.18 AV	54	-22.82	-71.67	-72.37	4.92	-64.08

Note: Margin value = Emission Level - Limit value

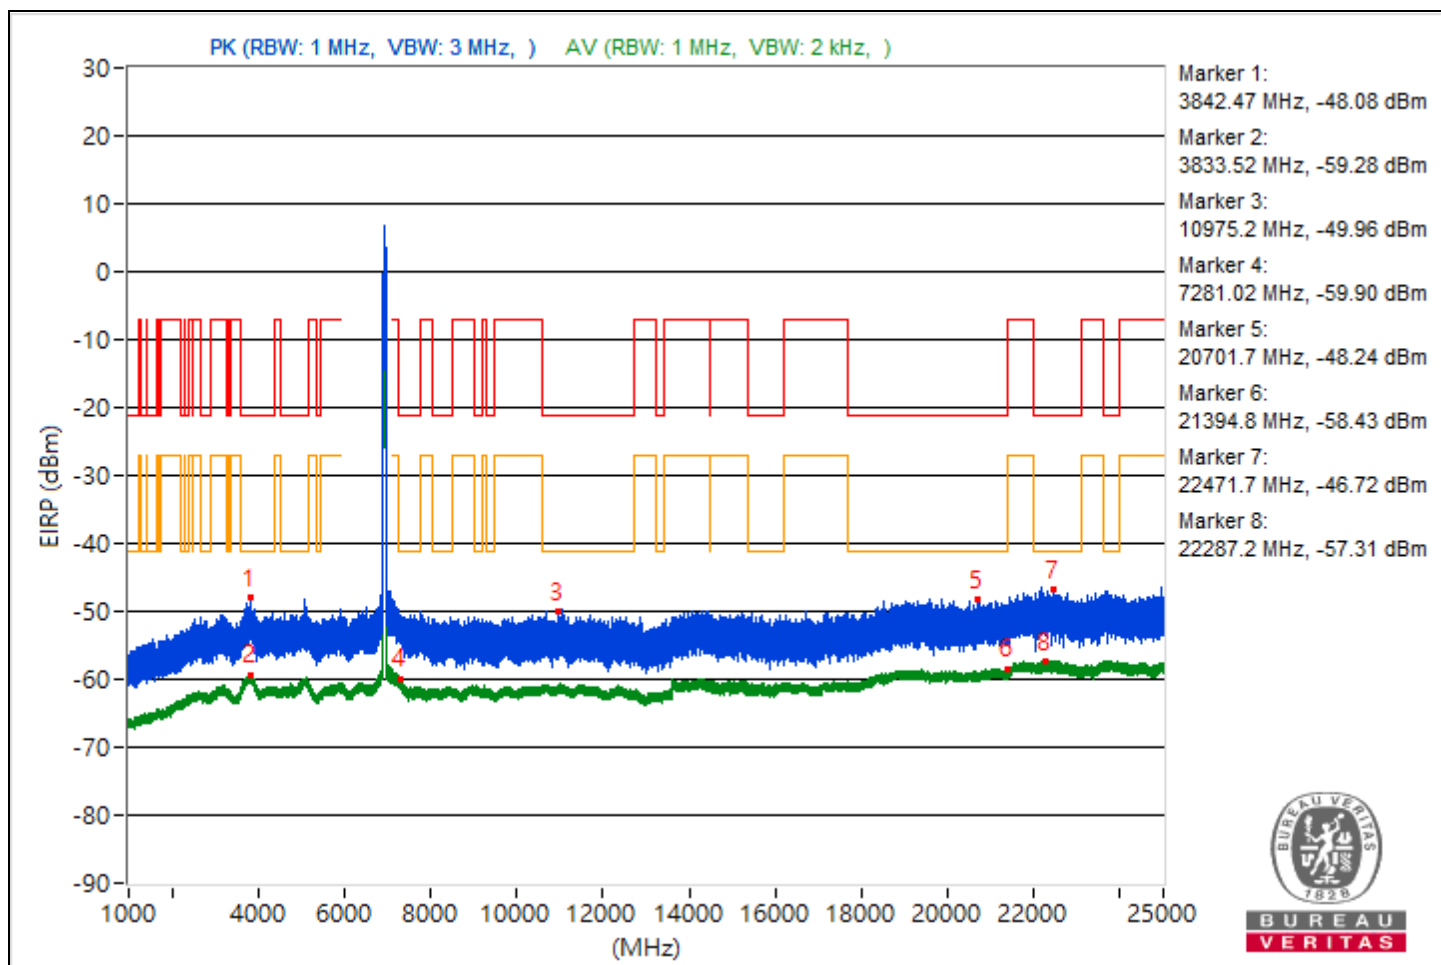


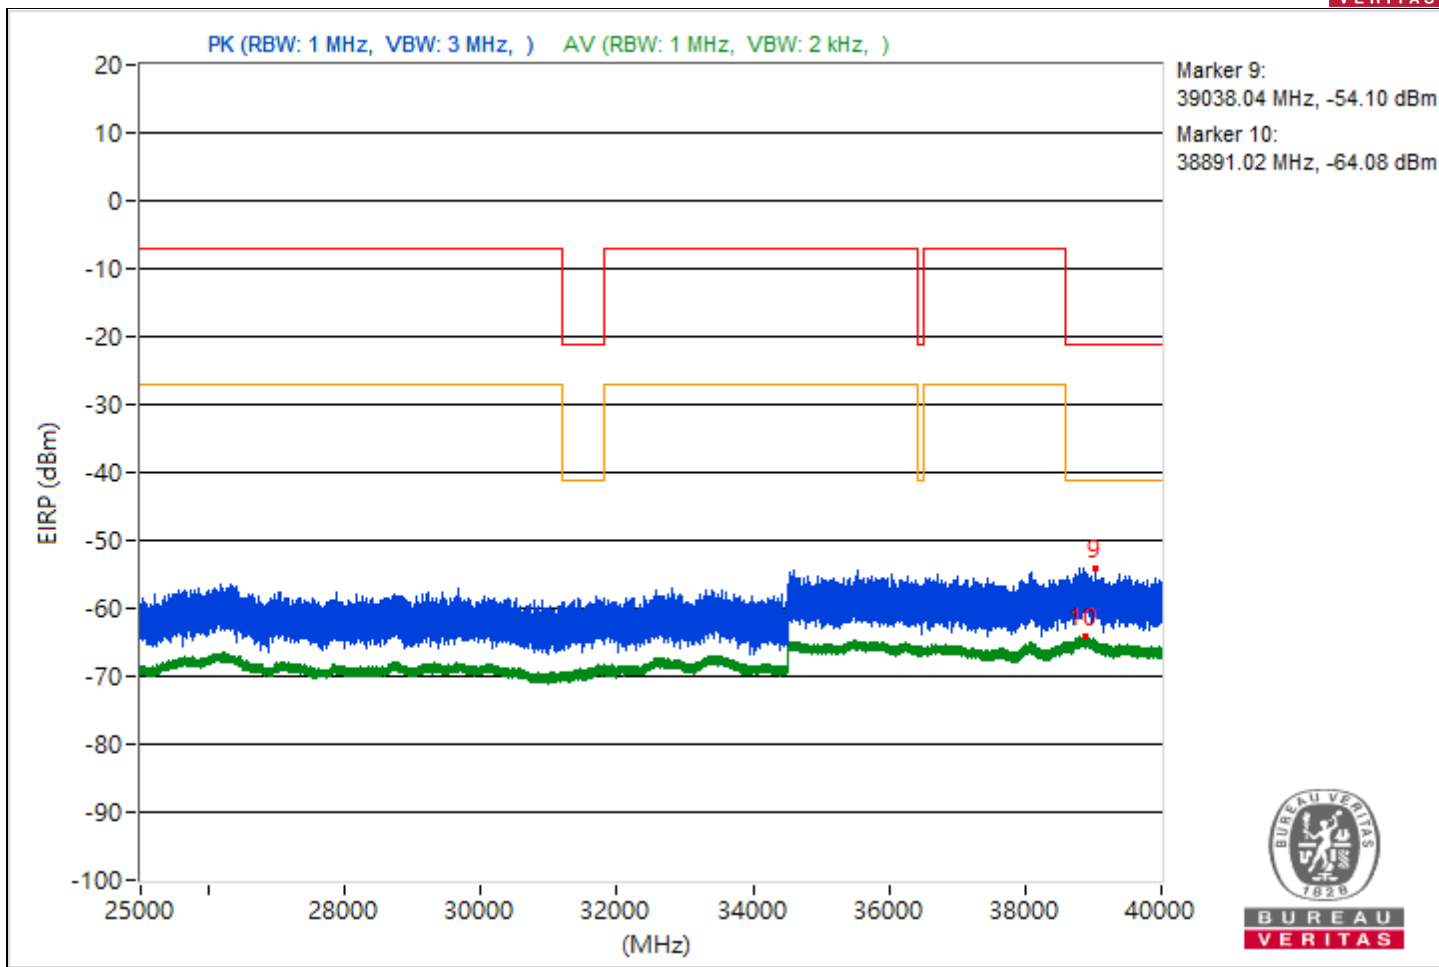


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3779.39	46.17 PK	74	-27.83	-59.89	-55.31	4.92	-49.09
2	3826.29	35.72 AV	54	-18.28	-67.85	-67.12	4.92	-59.54
3	7269.28	46.2 PK	74	-27.8	-54.91	-61.17	4.92	-49.06
4	7253.02	35.91 AV	54	-18.09	-66.74	-67.89	4.92	-59.35
5	21367.6	47.48 PK	74	-26.52	-53.5	-60.45	4.92	-47.78
6	21138.1	36.73 AV	54	-17.27	-66.88	-66.07	4.92	-58.53
7	23719.1	47.84 PK	74	-26.16	-59.1	-53.37	4.92	-47.42
8	23751.4	37.77 AV	54	-16.23	-66.11	-64.83	4.92	-57.49
9	39038.49	40.71 PK	74	-33.29	-60.78	-65.3	4.92	-54.55
10	38836.62	31.13 AV	54	-22.87	-71.88	-72.24	4.92	-64.13

Note: Margin value = Emission Level - Limit value

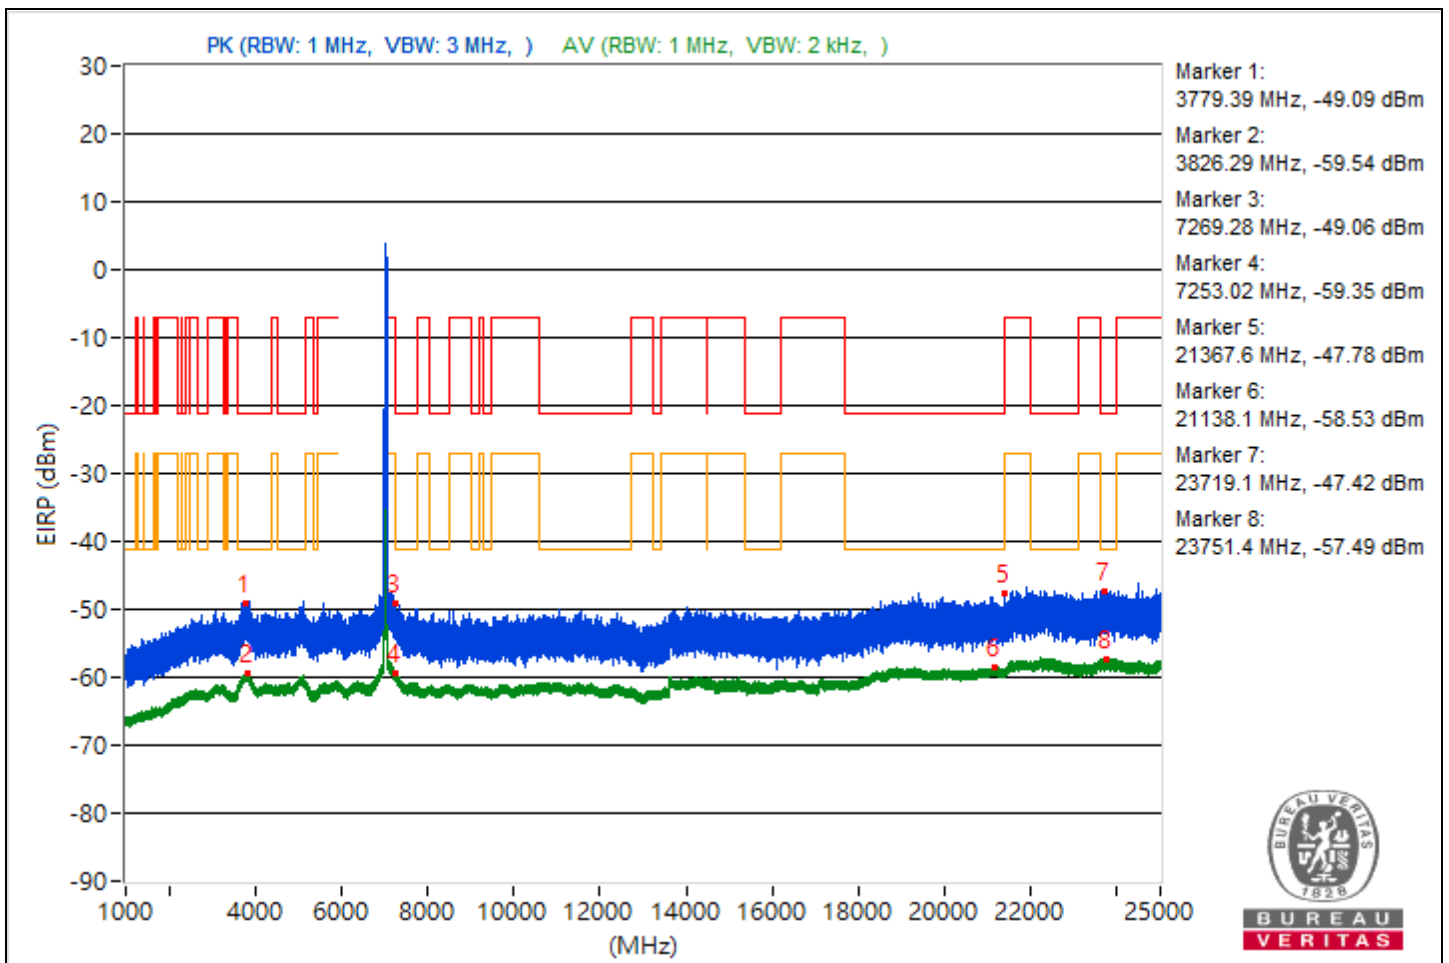


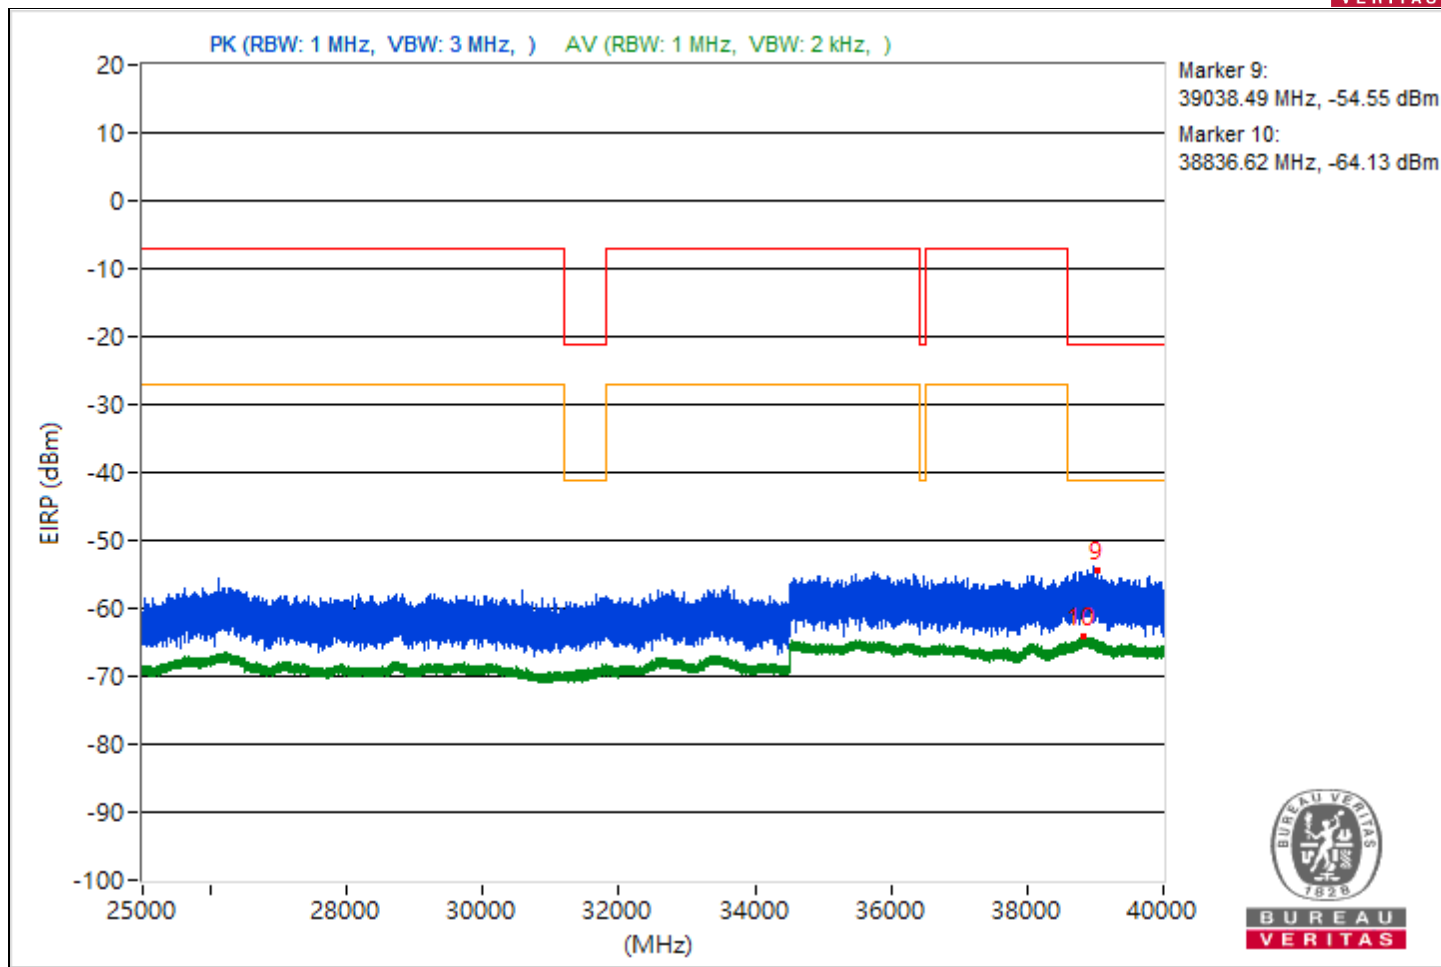


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5432.32	47.59 PK	74	-26.41	-53.46	-60	4.92	-47.67
2	5458.14	36.9 AV	54	-17.1	-64.57	-69.15	4.92	-58.36
3	8033.42	51.09 PK	74	-22.91	-51	-53.59	4.92	-44.17
4	8033.33	49.32 AV	54	-4.68	-52.44	-56.01	4.92	-45.94
5	19449.8	47.13 PK	74	-26.87	-54.12	-59.67	4.92	-48.13
6	20828.9	36.67 AV	54	-17.33	-67.06	-66.04	4.92	-58.59
7	22310.6	47.99 PK	74	-26.01	-57.82	-53.57	4.92	-47.27
8	23648	38.15 AV	54	-15.85	-64.68	-65.44	4.92	-57.11
9	38782.22	41.41 PK	74	-32.59	-65.11	-59.91	4.92	-53.85
10	38866.31	31.03 AV	54	-22.97	-71.73	-72.65	4.92	-64.23

Note: Margin value = Emission Level - Limit value

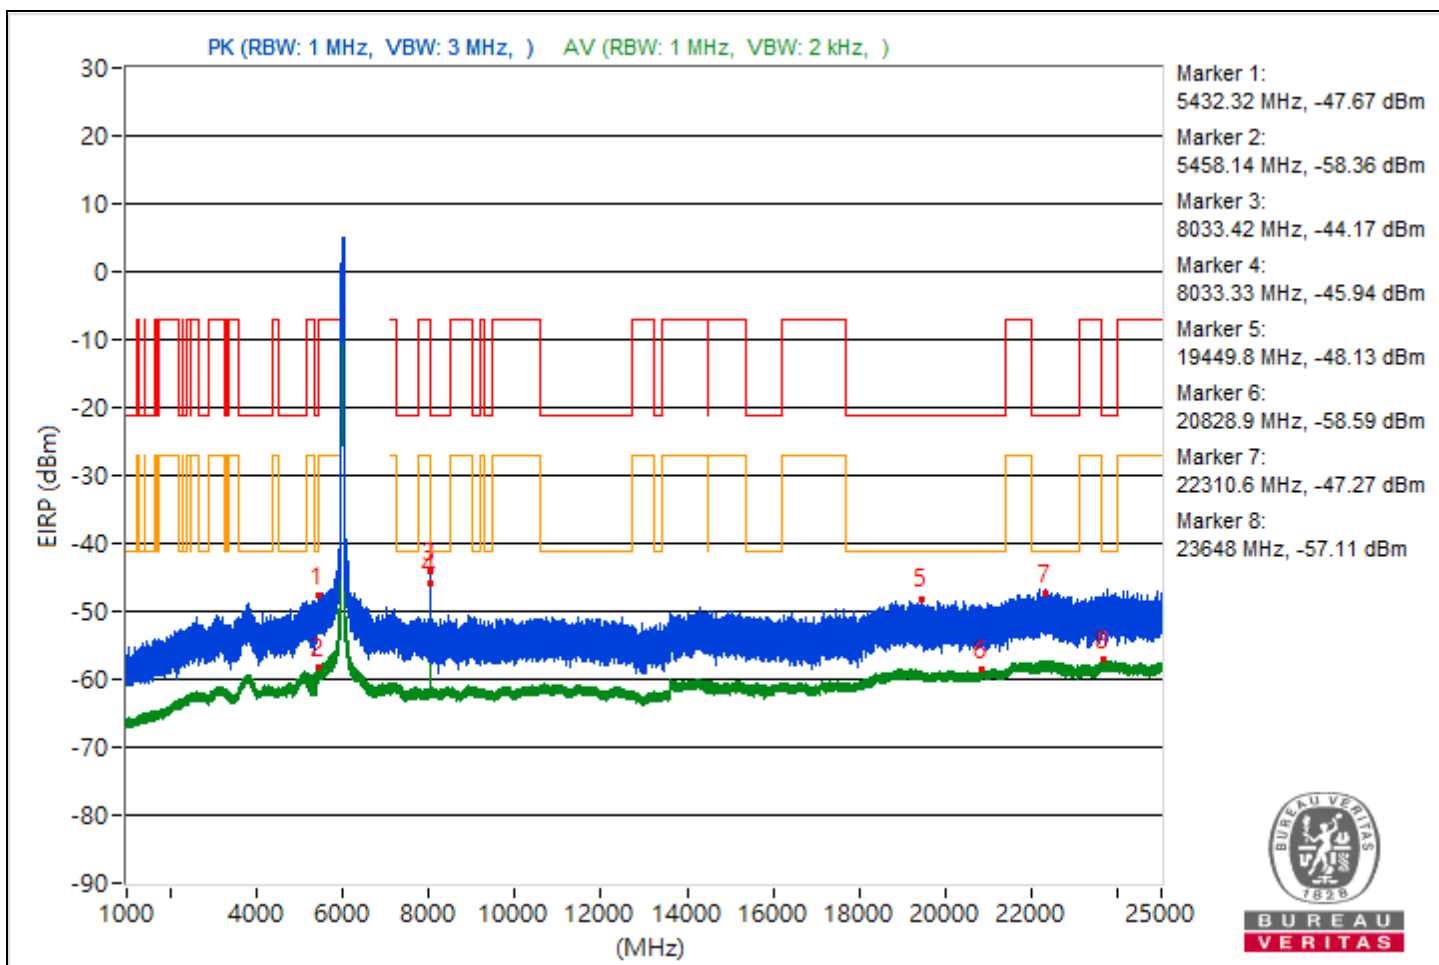

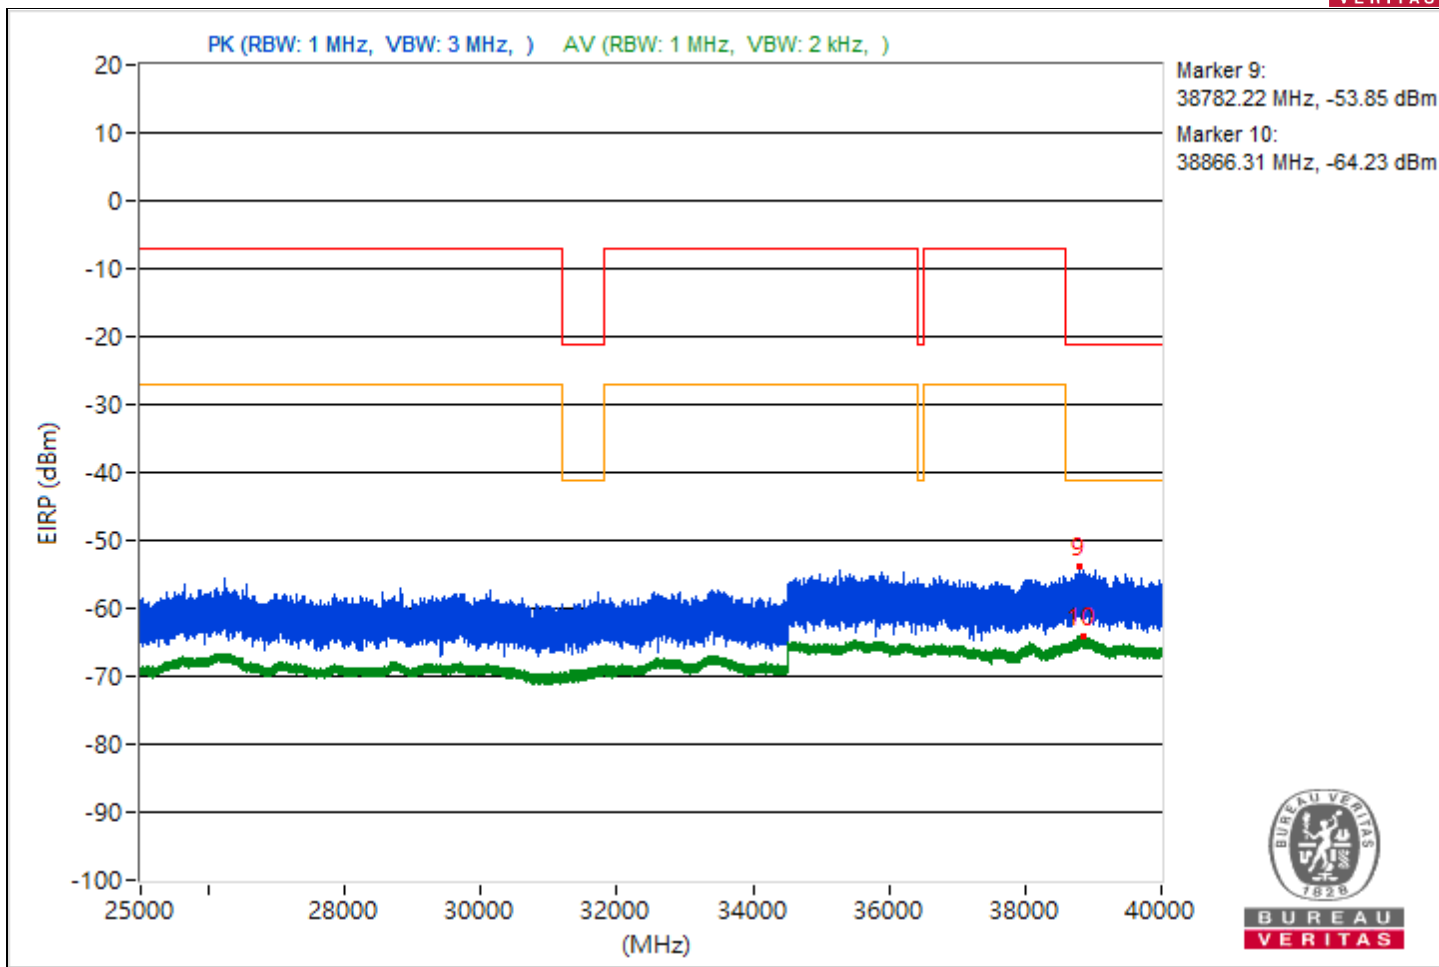





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5430.69	46.61 PK	74	-27.39	-55.2	-58.61	4.92	-48.65
2	5068.79	36.11 AV	54	-17.89	-66.5	-67.74	4.92	-59.15
3	8460.09	49.96 PK	74	-24.04	-53.36	-53.1	4.92	-45.3
4	8460	47.96 AV	54	-6.04	-55.3	-55.16	4.92	-47.3
5	20895.8	47.86 PK	74	-26.14	-53.52	-58.51	4.92	-47.4
6	21182.4	36.71 AV	54	-17.29	-66.92	-66.09	4.92	-58.55
7	22550.6	49.1 PK	74	-24.9	-52.22	-57.45	4.92	-46.16
8	22288	37.72 AV	54	-16.28	-66.18	-64.86	4.92	-57.54
9	38996.09	41.49 PK	74	-32.51	-60.89	-62.7	4.92	-53.77
10	38818.22	31.19 AV	54	-22.81	-72.26	-71.76	4.92	-64.07

Note: Margin value = Emission Level - Limit value

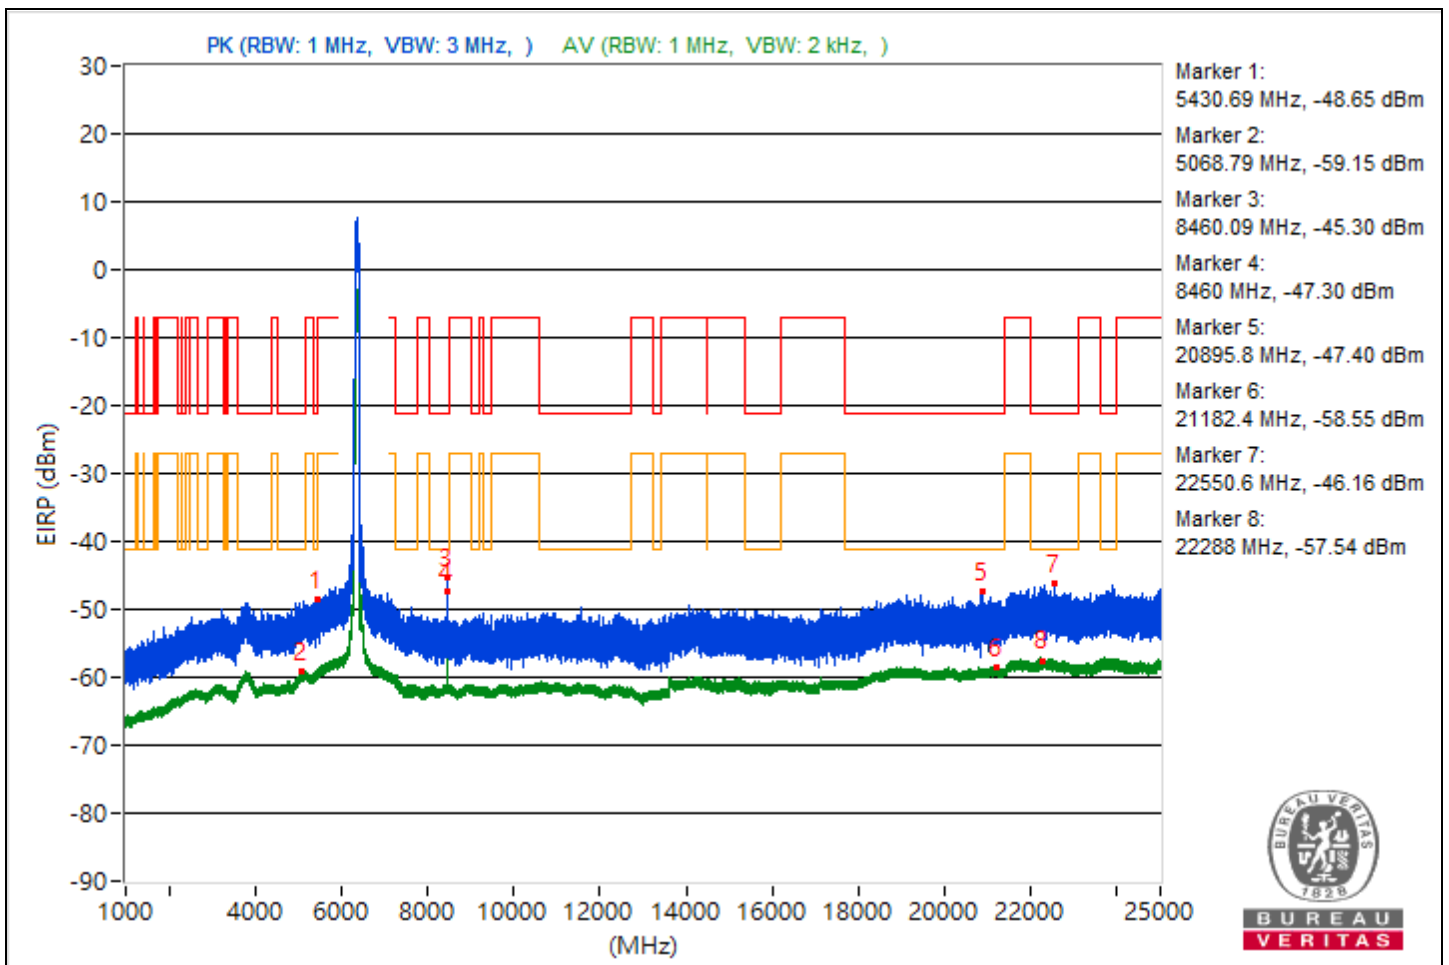

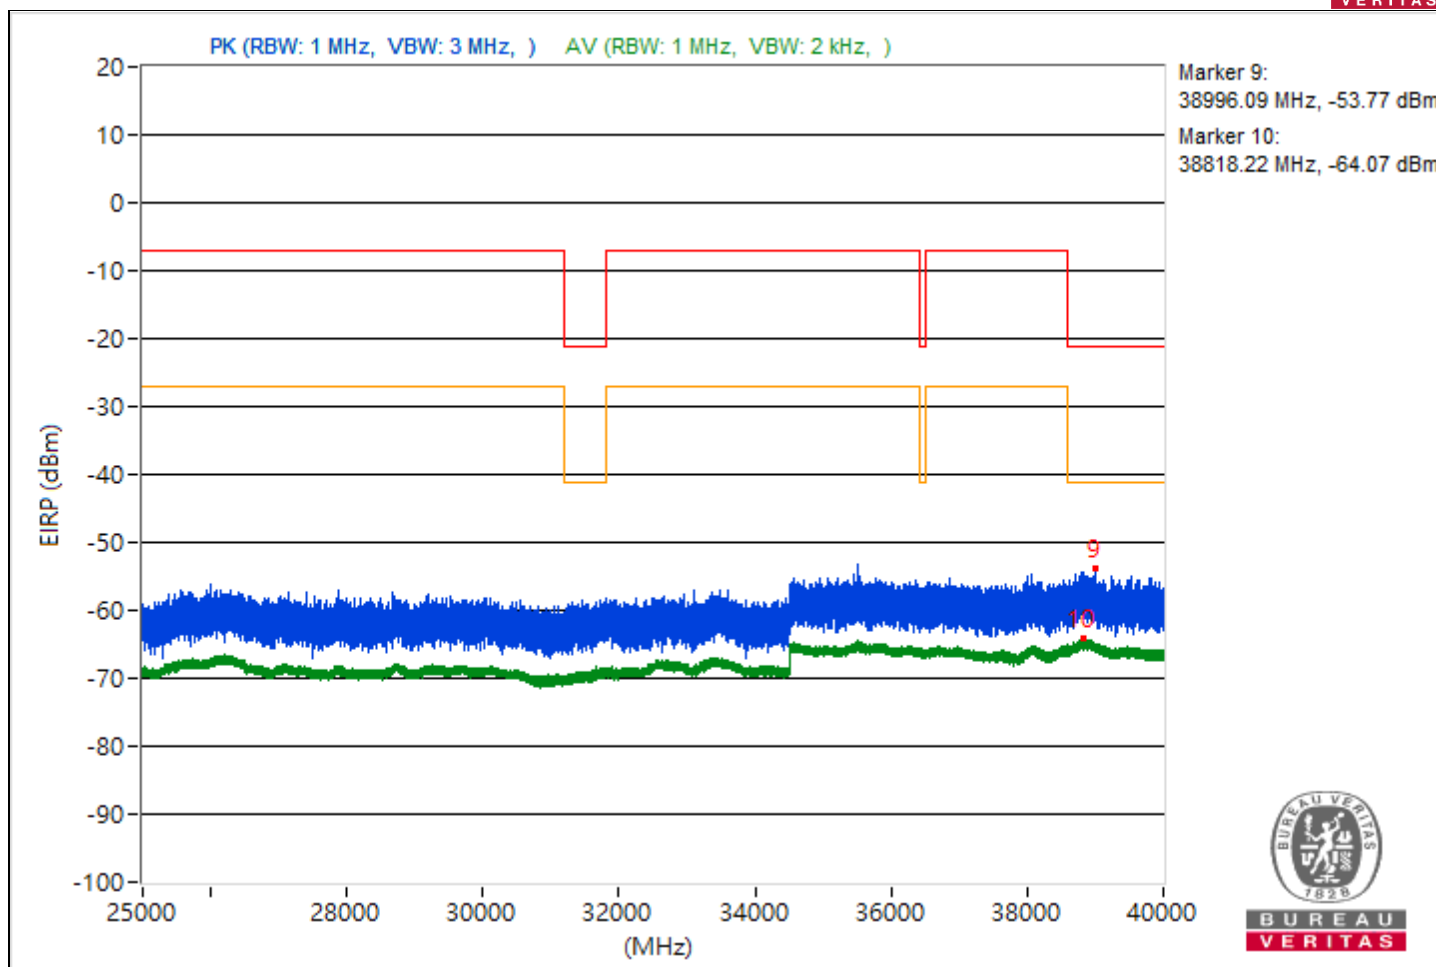





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3849.93	46.32 PK	74	-27.68	-59.11	-55.4	4.92	-48.94
2	5444.46	36.42 AV	54	-17.58	-67.36	-66.25	4.92	-58.84
3	7276.04	45.59 PK	74	-28.41	-55.88	-60.49	4.92	-49.67
4	7257.69	35.76 AV	54	-18.24	-67.07	-67.81	4.92	-59.5
5	21183.4	47.37 PK	74	-26.63	-54.12	-58.65	4.92	-47.89
6	21180.5	36.76 AV	54	-17.24	-66.06	-66.84	4.92	-58.5
7	23828.2	47.51 PK	74	-26.49	-59.59	-53.66	4.92	-47.75
8	23661.1	38.01 AV	54	-15.99	-64.79	-65.62	4.92	-57.25
9	38617.33	40.76 PK	74	-33.24	-66.35	-60.41	4.92	-54.5
10	38845.78	31.13 AV	54	-22.87	-72.36	-71.79	4.92	-64.13

Note: Margin value = Emission Level - Limit value

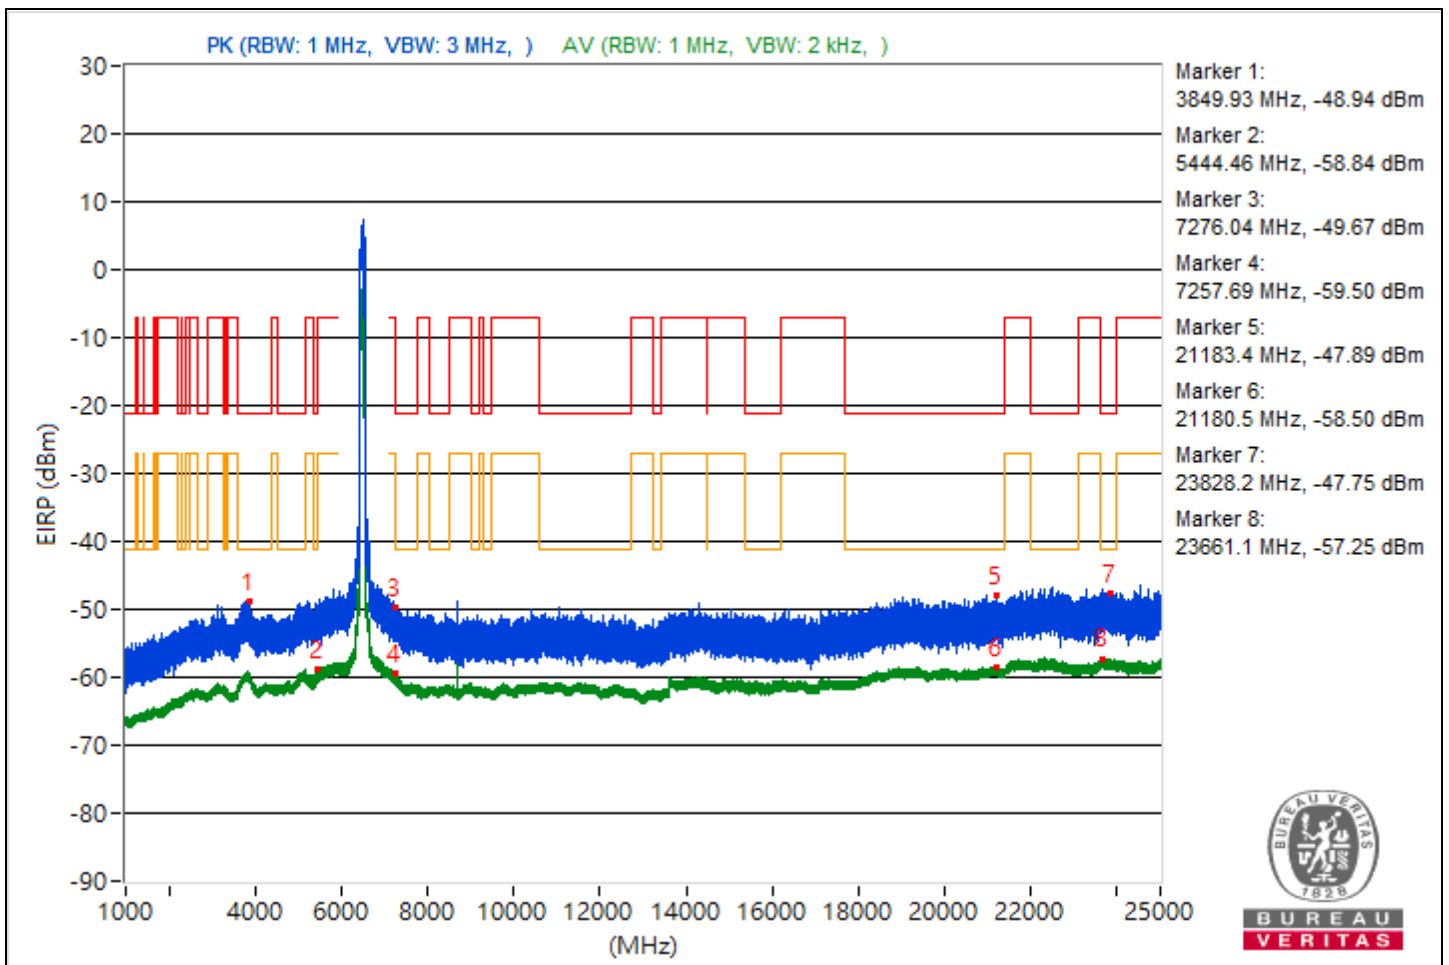


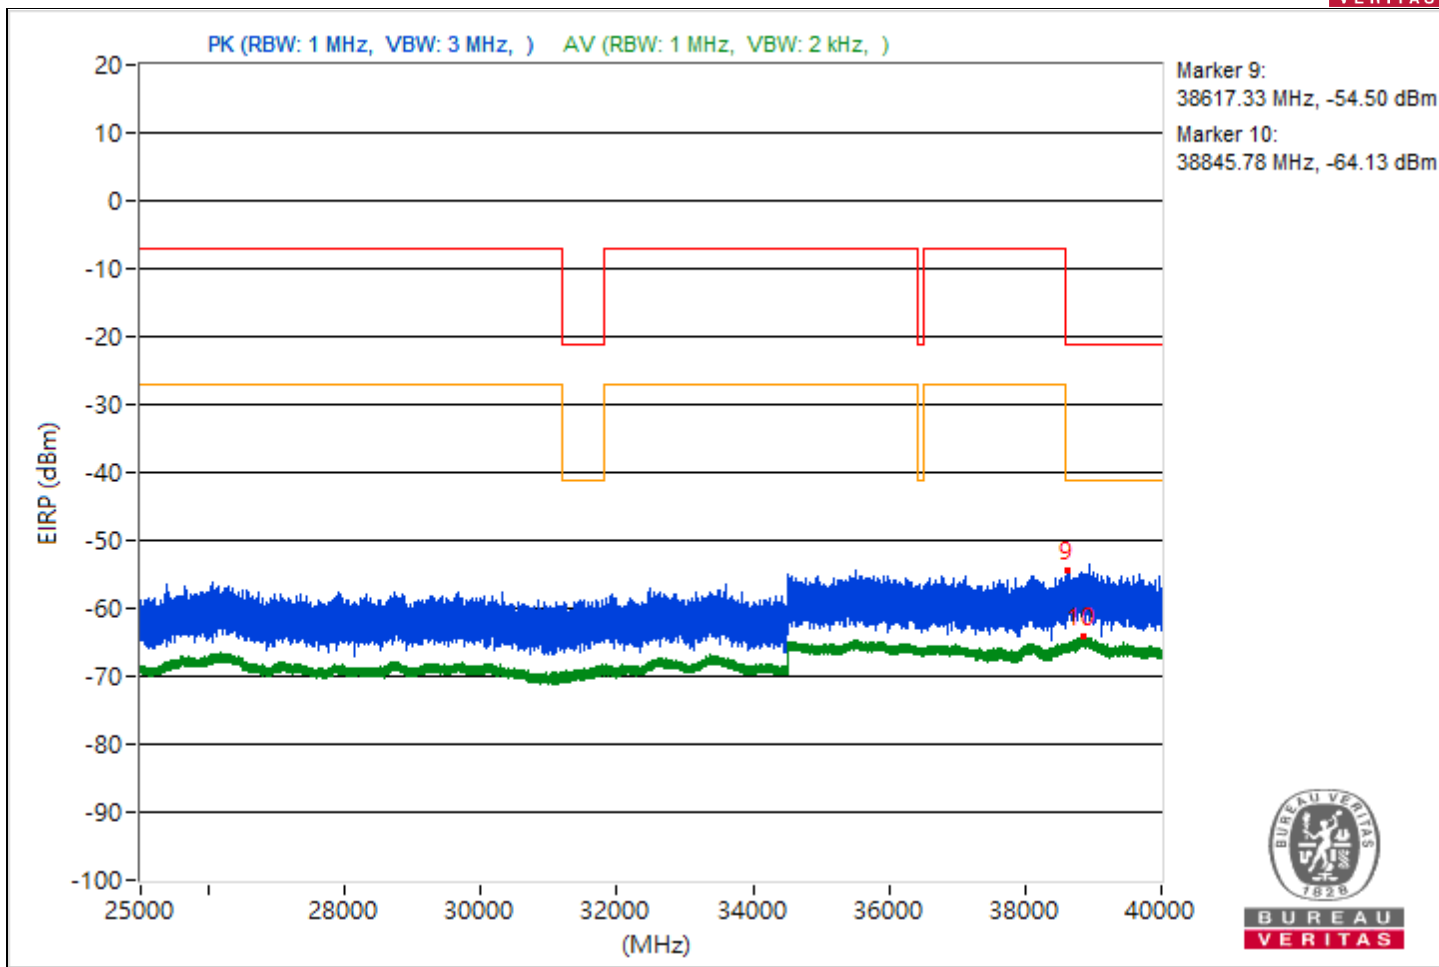


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.06	45.86 PK	74	-28.14	-61.38	-55.27	4.92	-49.4
2	3817.19	35.94 AV	54	-18.06	-67.82	-66.75	4.92	-59.32
3	7284.76	46.45 PK	74	-27.55	-58.41	-55.54	4.92	-48.81
4	7264.92	35.67 AV	54	-18.33	-67.93	-67.14	4.92	-59.59
5	21015.3	47.45 PK	74	-26.55	-54.44	-57.6	4.92	-47.81
6	21113.6	36.66 AV	54	-17.34	-66.15	-66.95	4.92	-58.6
7	22634.9	48.19 PK	74	-25.81	-57.65	-53.37	4.92	-47.07
8	22208.2	37.94 AV	54	-16.06	-64.7	-65.88	4.92	-57.32
9	38896.18	41.57 PK	74	-32.43	-64.32	-59.97	4.92	-53.69
10	38888.8	30.95 AV	54	-23.05	-71.7	-72.84	4.92	-64.31

Note: Margin value = Emission Level - Limit value

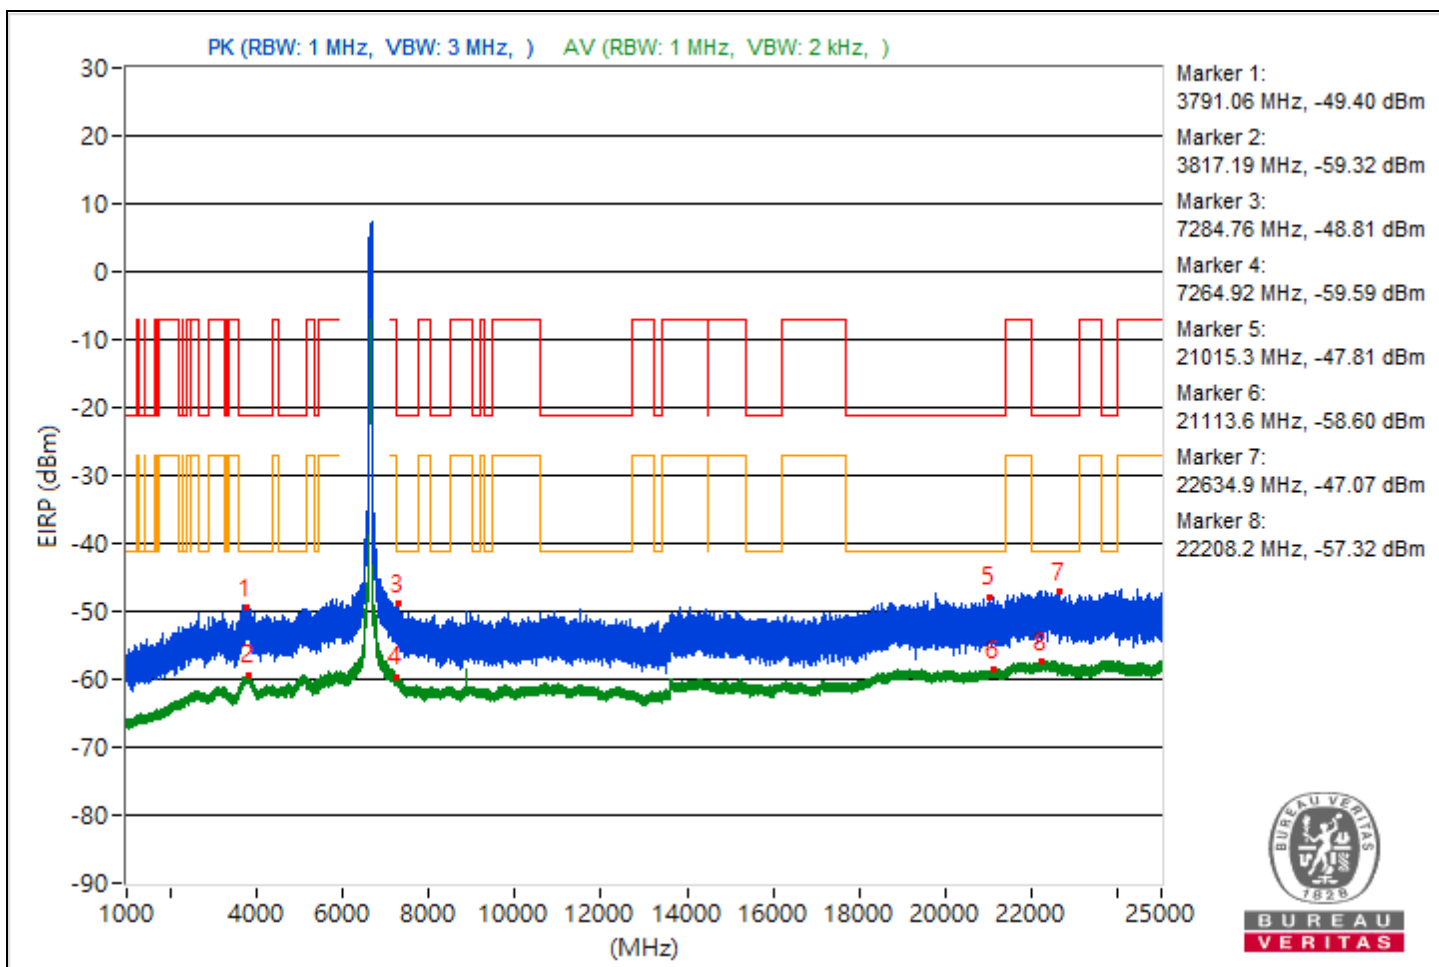


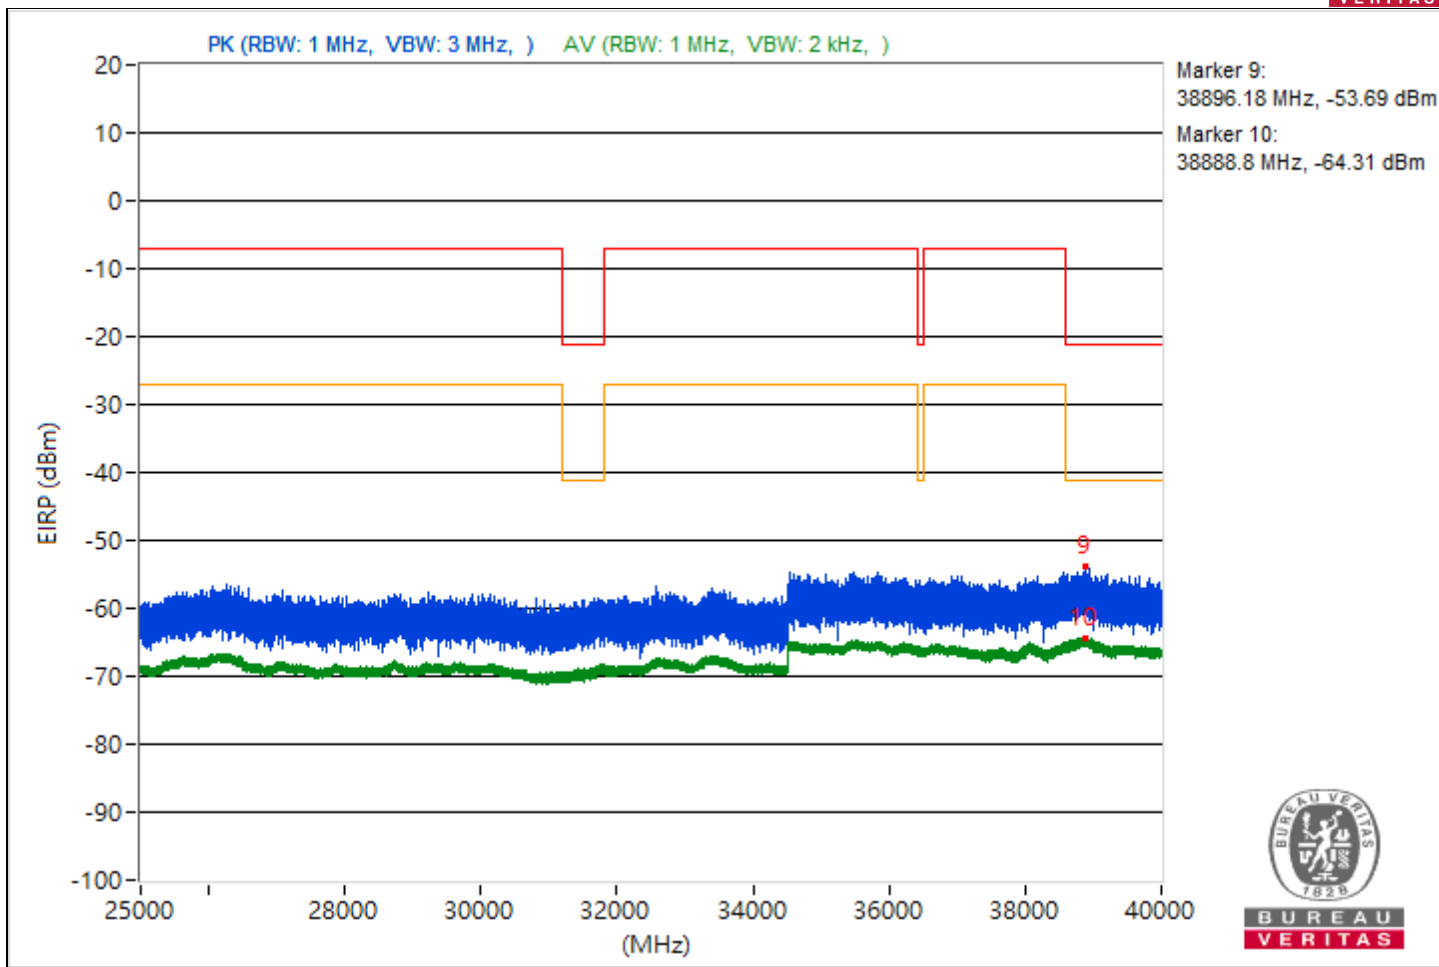


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3848.07	46.49 PK	74	-27.51	-58.21	-55.58	4.92	-48.77
2	3797.9	35.91 AV	54	-18.09	-67.69	-66.9	4.92	-59.35
3	7297.43	47.07 PK	74	-26.93	-54.51	-58.7	4.92	-48.19
4	7262.9	36.77 AV	54	-17.23	-67.17	-65.79	4.92	-58.49
5	18692.4	47.11 PK	74	-26.89	-53.74	-61.51	4.92	-48.15
6	21108.2	36.78 AV	54	-17.22	-66.94	-65.94	4.92	-58.48
7	22144.4	48.51 PK	74	-25.49	-58.95	-52.56	4.92	-46.75
8	22495.3	37.97 AV	54	-16.03	-64.64	-65.88	4.92	-57.29
9	38620.71	40.76 PK	74	-33.24	-66.95	-60.27	4.92	-54.5
10	38799.82	30.94 AV	54	-23.06	-72.75	-71.79	4.92	-64.32

Note: Margin value = Emission Level - Limit value

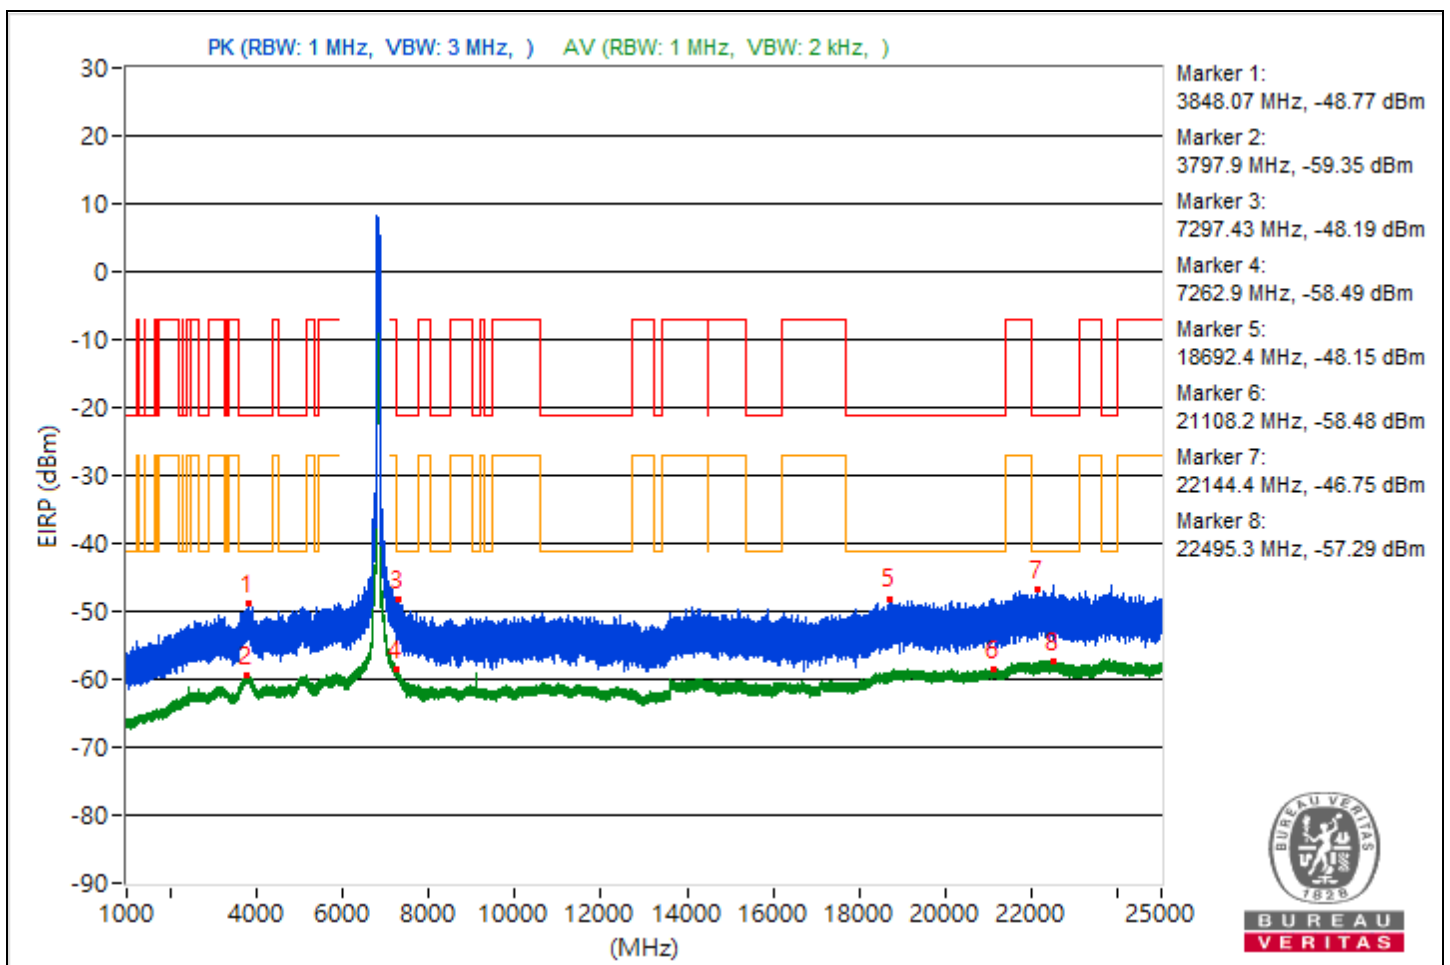


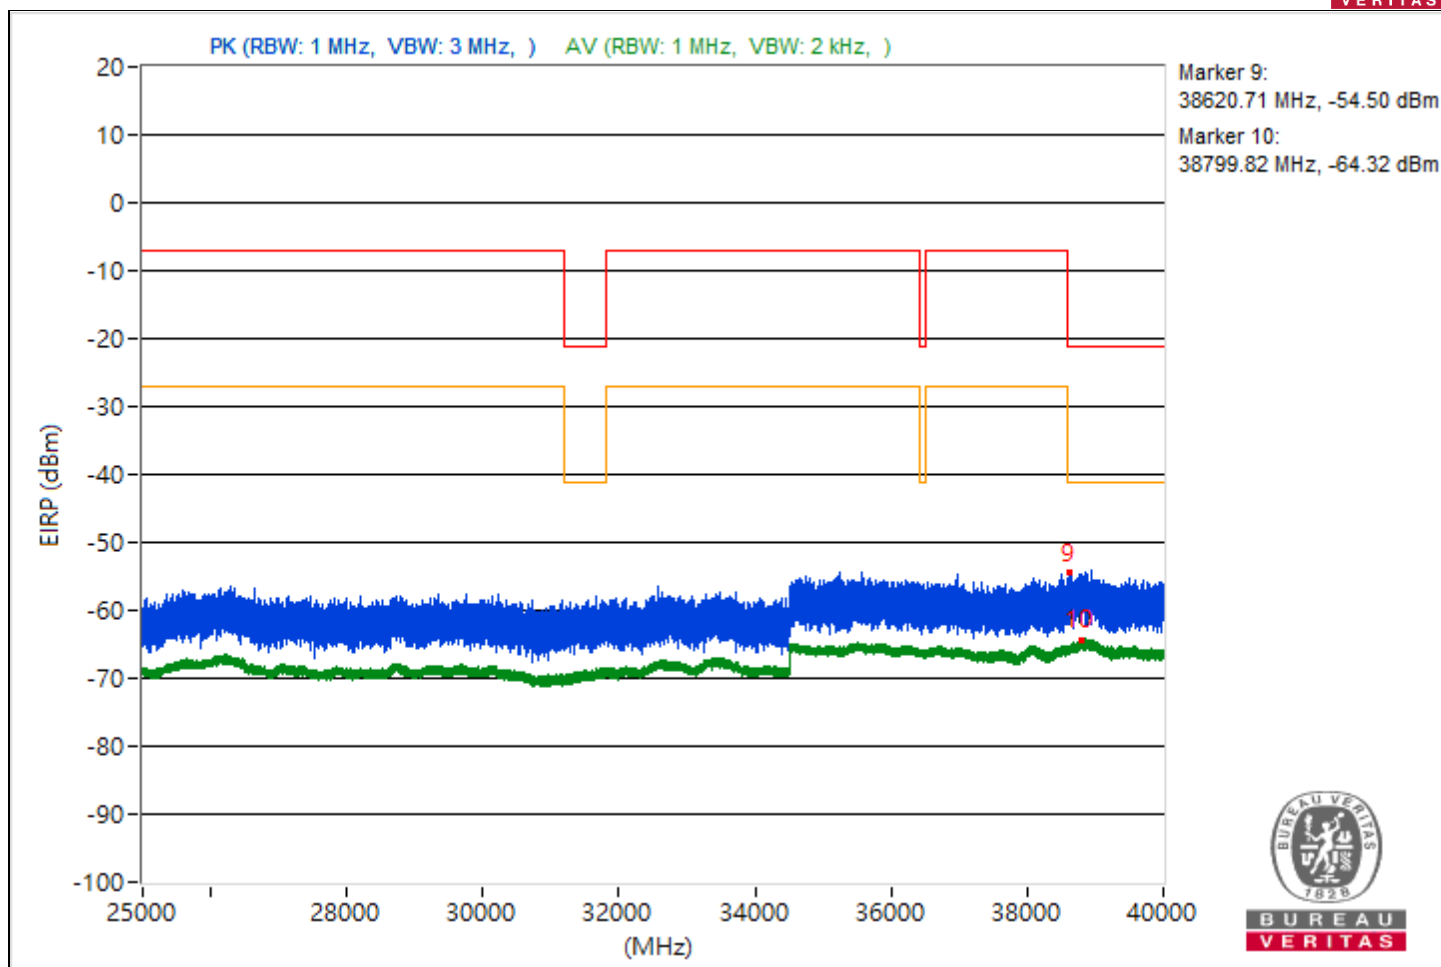


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5048.57	46.93 PK	74	-27.07	-55.92	-56.62	4.92	-48.33
2	3810.73	35.66 AV	54	-18.34	-66.84	-68.34	4.92	-59.6
3	7270.91	48.82 PK	74	-25.18	-54.7	-54.06	4.92	-46.44
4	7260.33	38.11 AV	54	-15.89	-65.5	-64.7	4.92	-57.15
5	20656.4	47.43 PK	74	-26.57	-58.65	-54.05	4.92	-47.83
6	18865.1	36.68 AV	54	-17.32	-66.05	-67.01	4.92	-58.58
7	22310.6	48.33 PK	74	-25.67	-53.67	-56.51	4.92	-46.93
8	22265.5	38.03 AV	54	-15.97	-65.71	-64.68	4.92	-57.23
9	38728	41.72 PK	74	-32.28	-59.33	-65.86	4.92	-53.54
10	38847.91	31.21 AV	54	-22.79	-72.21	-71.76	4.92	-64.05

Note: Margin value = Emission Level - Limit value

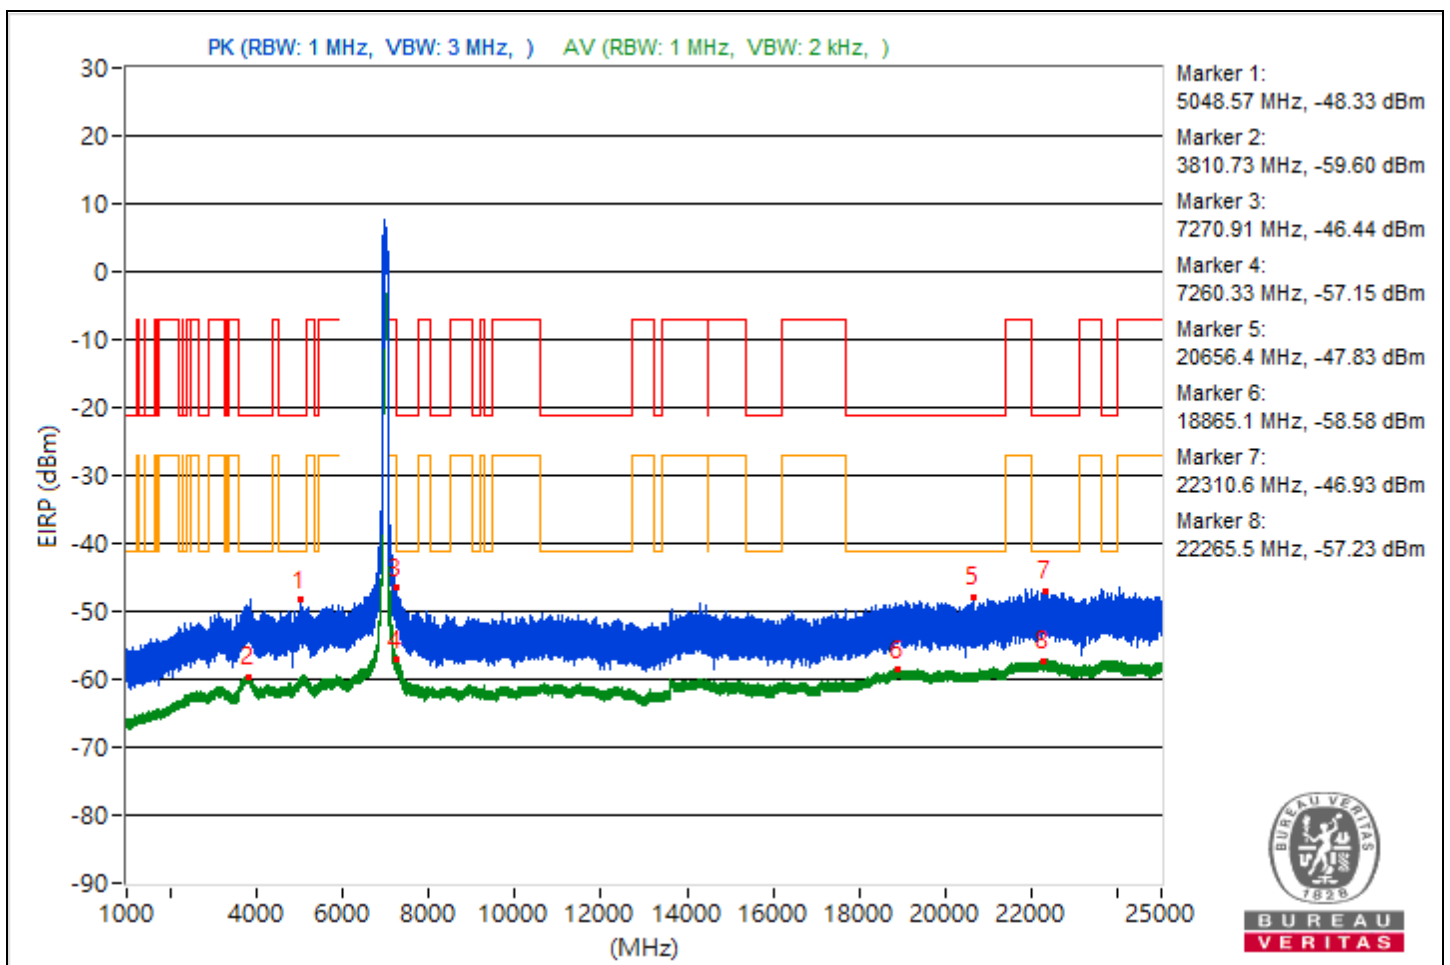


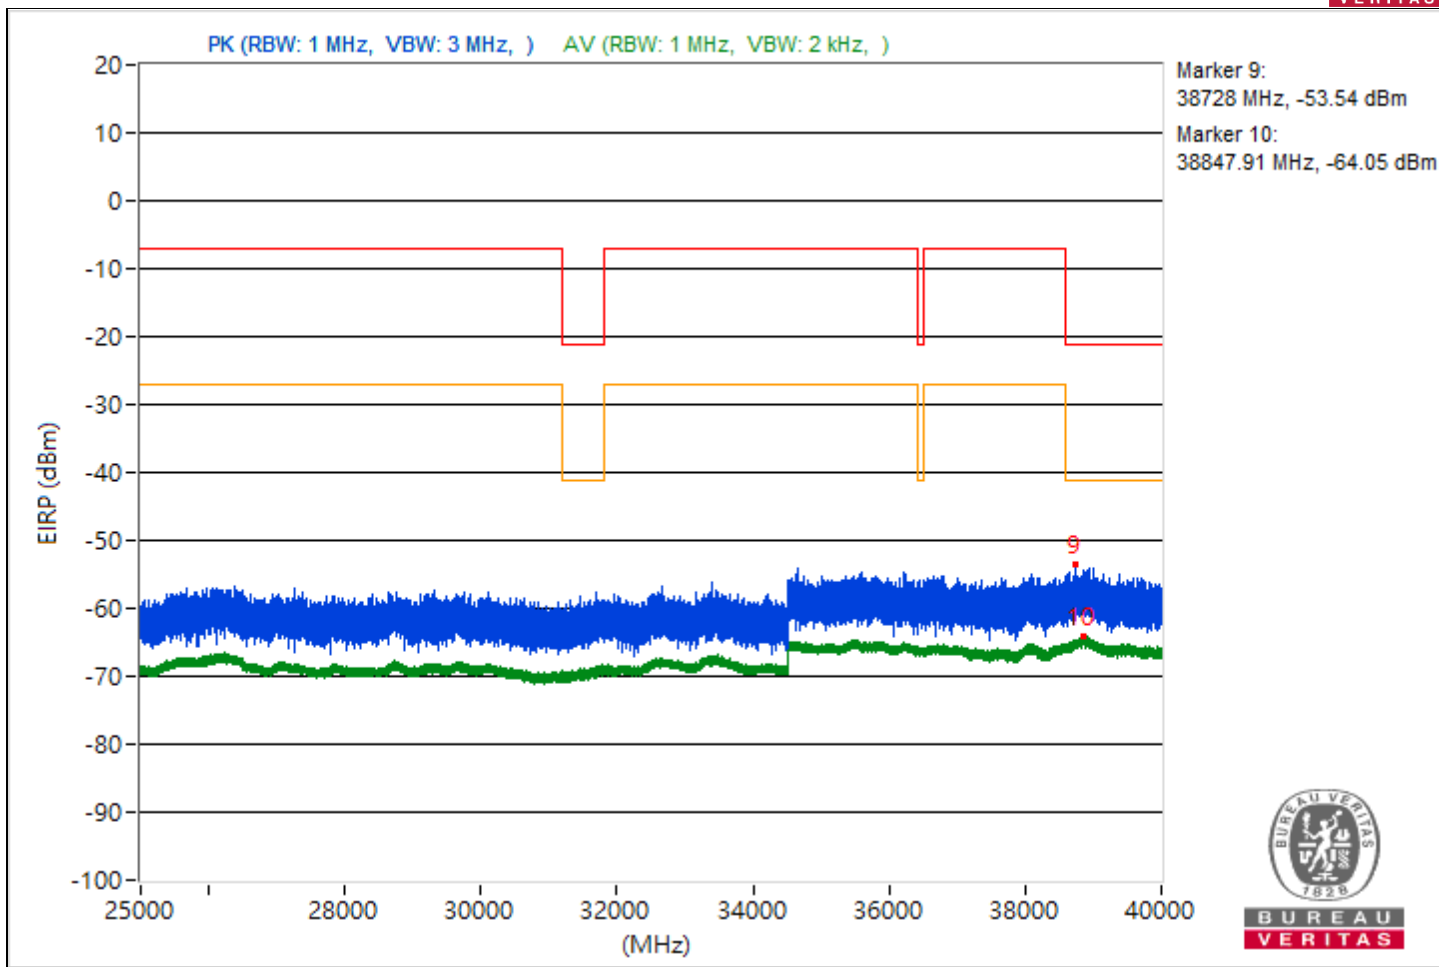


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5364.42	48.15 PK	74	-25.85	-56.45	-53.98	4.92	-47.11
2	5447.8	38.28 AV	54	-15.72	-64.33	-65.58	4.92	-56.98
3	8033.51	52.3 PK	74	-21.7	-51.35	-50.48	4.92	-42.96
4	8033.33	50.42 AV	54	-3.58	-52.74	-52.81	4.92	-44.84
5	21140.5	47.41 PK	74	-26.59	-58.09	-54.28	4.92	-47.85
6	21140.8	36.65 AV	54	-17.35	-66.12	-67.01	4.92	-58.61
7	22086.9	48.53 PK	74	-25.47	-53.18	-56.94	4.92	-46.73
8	23745.4	37.97 AV	54	-16.03	-65.79	-64.72	4.92	-57.29
9	39107.73	41.27 PK	74	-32.73	-63.94	-60.55	4.92	-53.99
10	38808.27	31.05 AV	54	-22.95	-71.56	-72.79	4.92	-64.21

Note: Margin value = Emission Level - Limit value

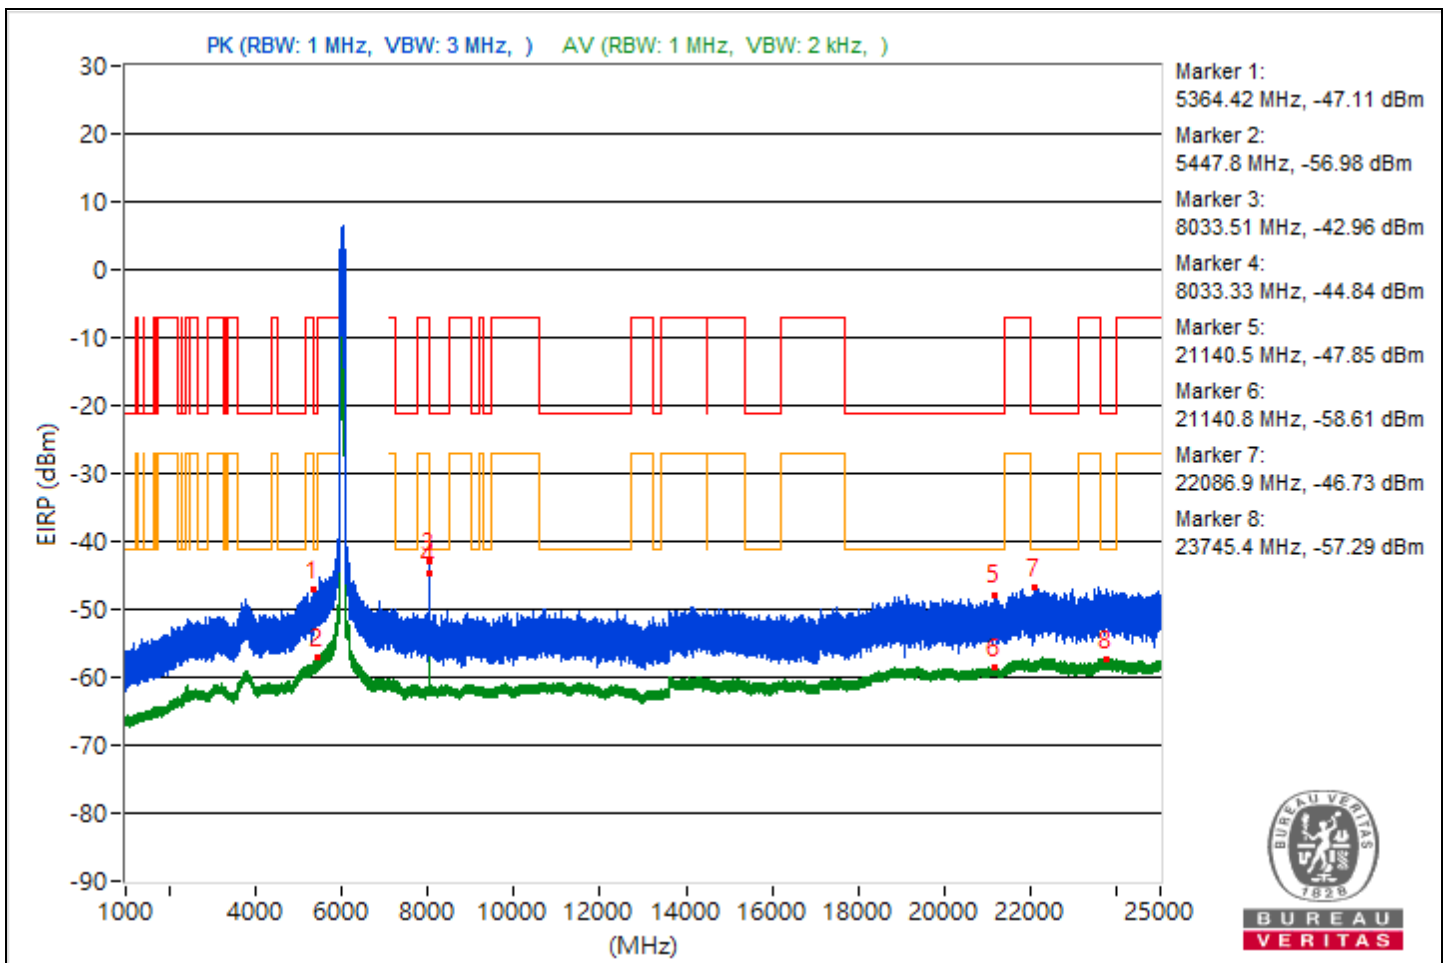


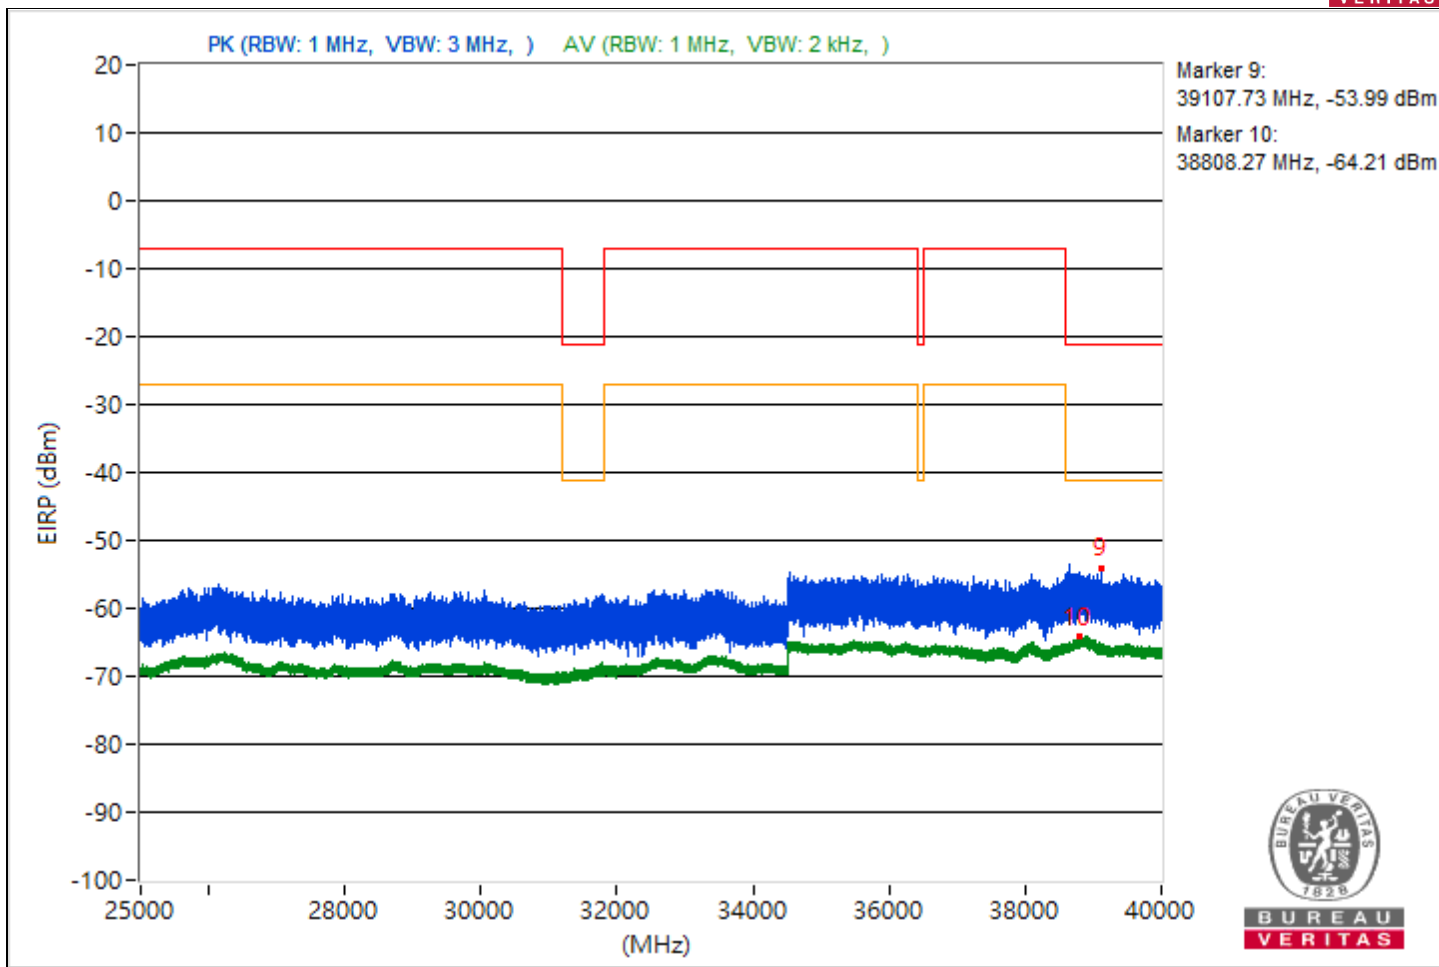


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5077.81	46.31 PK	74	-27.69	-55.49	-58.94	4.92	-48.95
2	5455.27	36.56 AV	54	-17.44	-66.46	-66.8	4.92	-58.7
3	8459.91	51.14 PK	74	-22.86	-51.42	-52.79	4.92	-44.12
4	8459.91	47.97 AV	54	-6.03	-55.2	-55.23	4.92	-47.29
5	21196.6	46.92 PK	74	-27.08	-59.87	-54.33	4.92	-48.34
6	21148.5	36.89 AV	54	-17.11	-65.83	-66.82	4.92	-58.37
7	22420.5	48.65 PK	74	-25.35	-53	-56.94	4.92	-46.61
8	22371	38.05 AV	54	-15.95	-65.51	-64.81	4.92	-57.21
9	39174.49	40.55 PK	74	-33.45	-67.41	-60.43	4.92	-54.71
10	38905.07	31.08 AV	54	-22.92	-72.64	-71.64	4.92	-64.18

Note: Margin value = Emission Level - Limit value

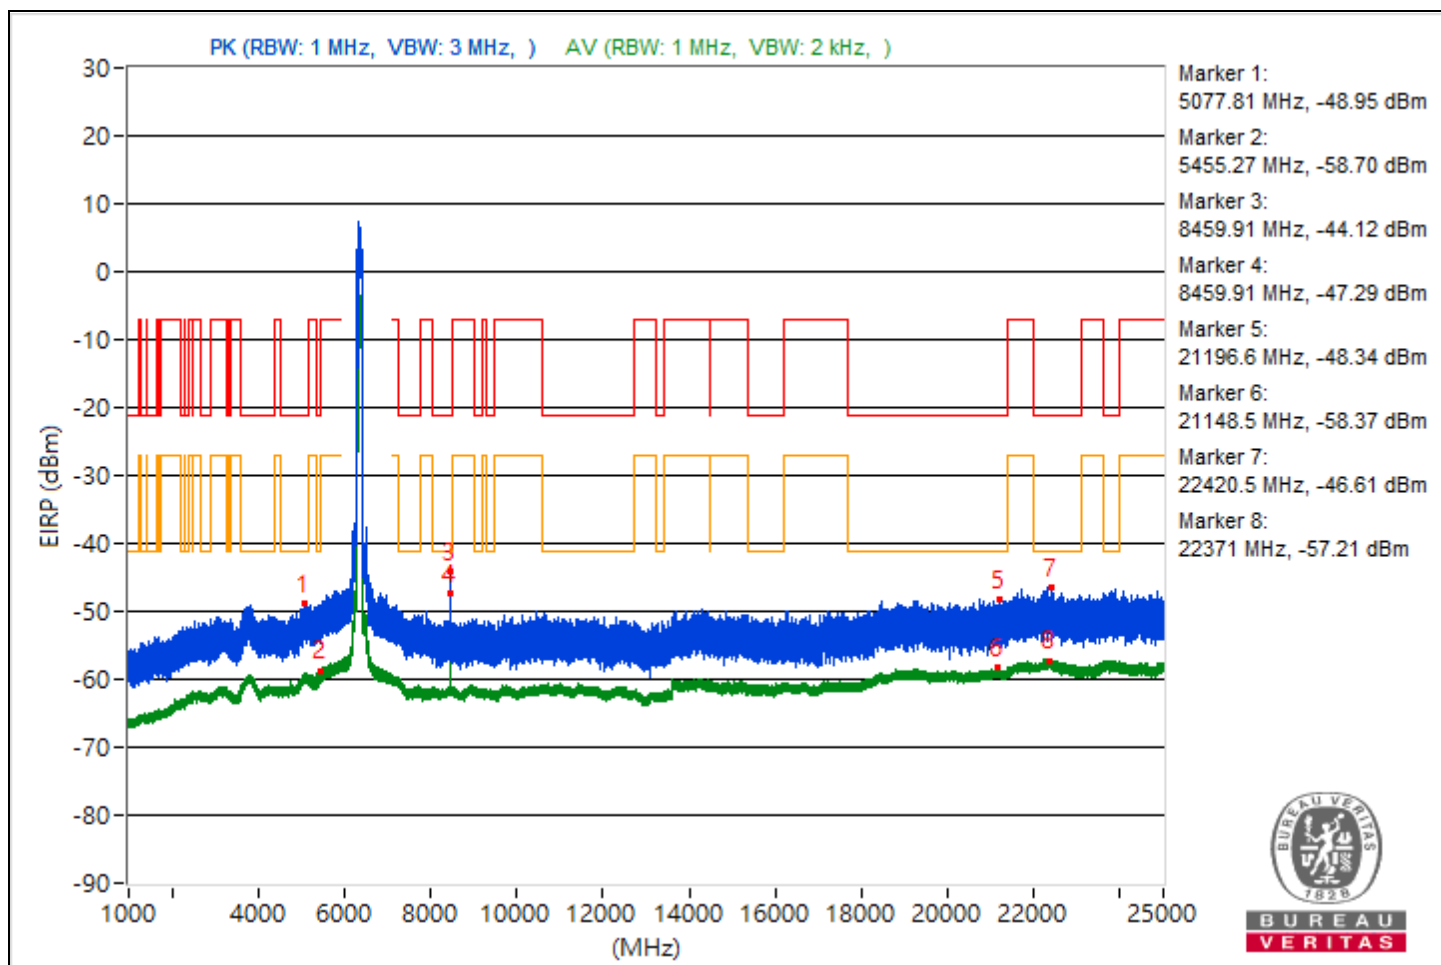

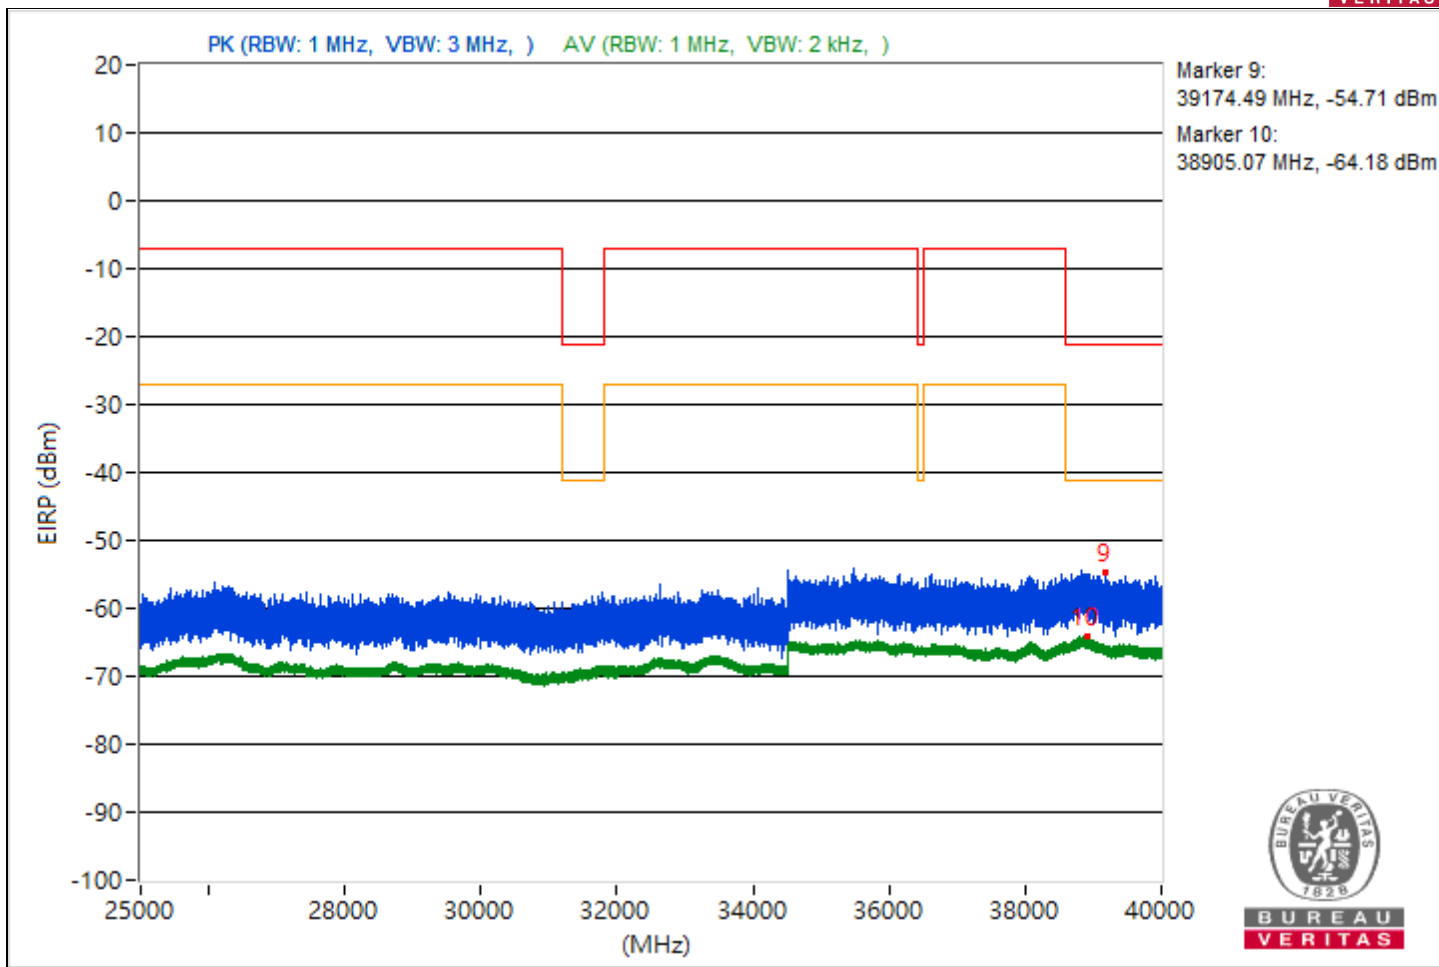





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.17	46.97 PK	74	-27.03	-57.54	-55.21	4.92	-48.29
2	5092.74	35.97 AV	54	-18.03	-66.88	-67.59	4.92	-59.29
3	7286.86	46.08 PK	74	-27.92	-60	-55.39	4.92	-49.18
4	7254.11	35.88 AV	54	-18.12	-67.46	-67.16	4.92	-59.38
5	18783.7	46.87 PK	74	-27.13	-58.6	-54.84	4.92	-48.39
6	21134	36.81 AV	54	-17.19	-66.69	-66.08	4.92	-58.45
7	22220.1	48.33 PK	74	-25.67	-59.2	-52.74	4.92	-46.93
8	22342.8	37.97 AV	54	-16.03	-64.57	-65.99	4.92	-57.29
9	38871.56	41.56 PK	74	-32.44	-63.92	-60.14	4.92	-53.7
10	38859.47	31.22 AV	54	-22.78	-71.57	-72.42	4.92	-64.04

Note: Margin value = Emission Level - Limit value

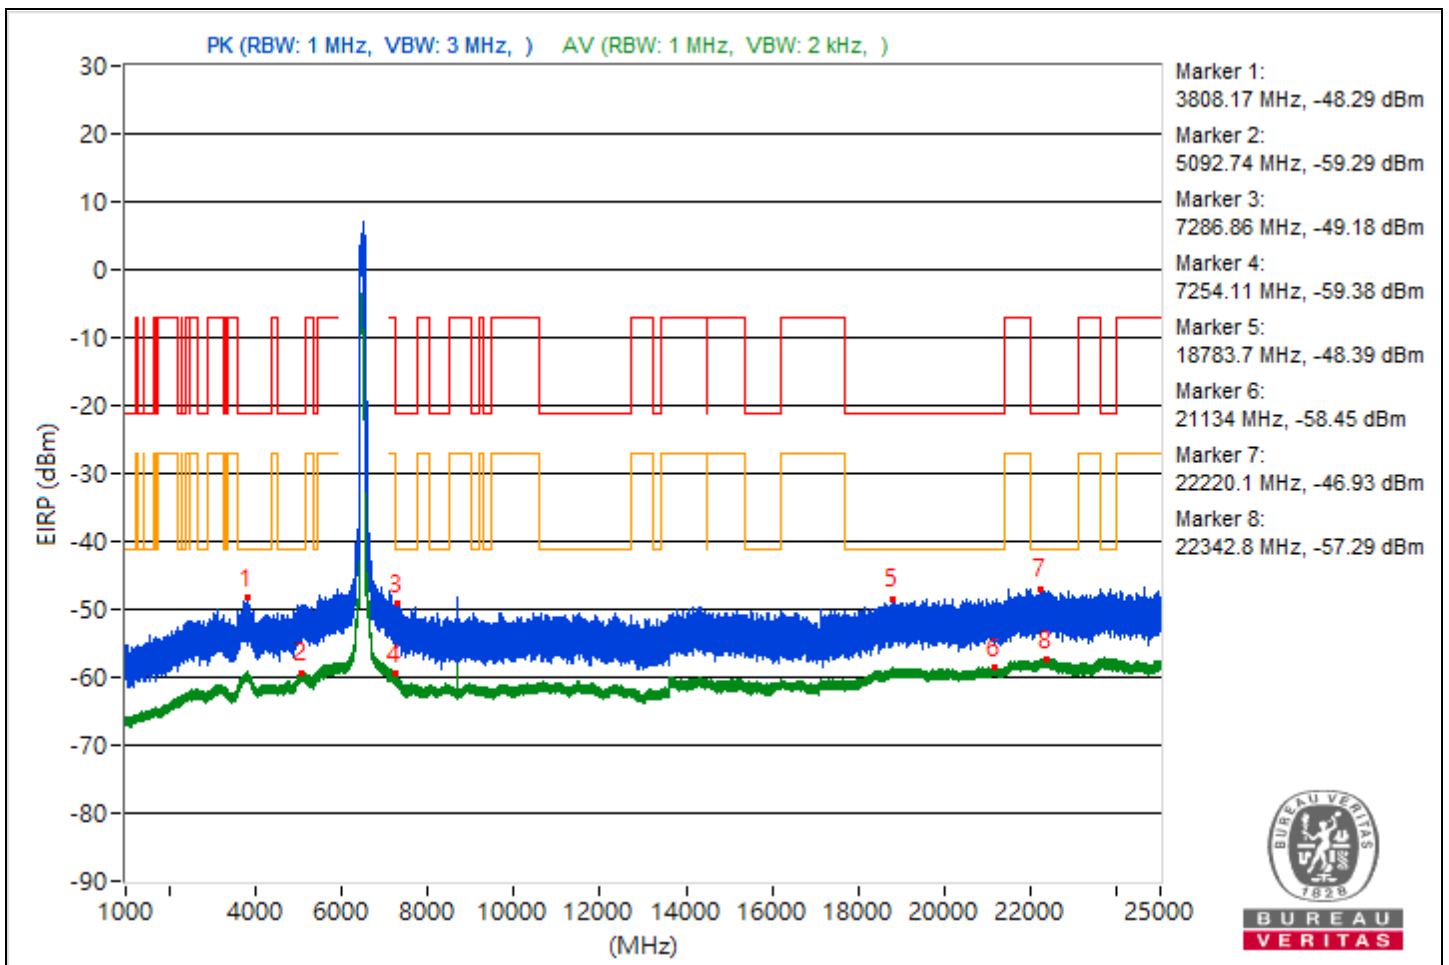


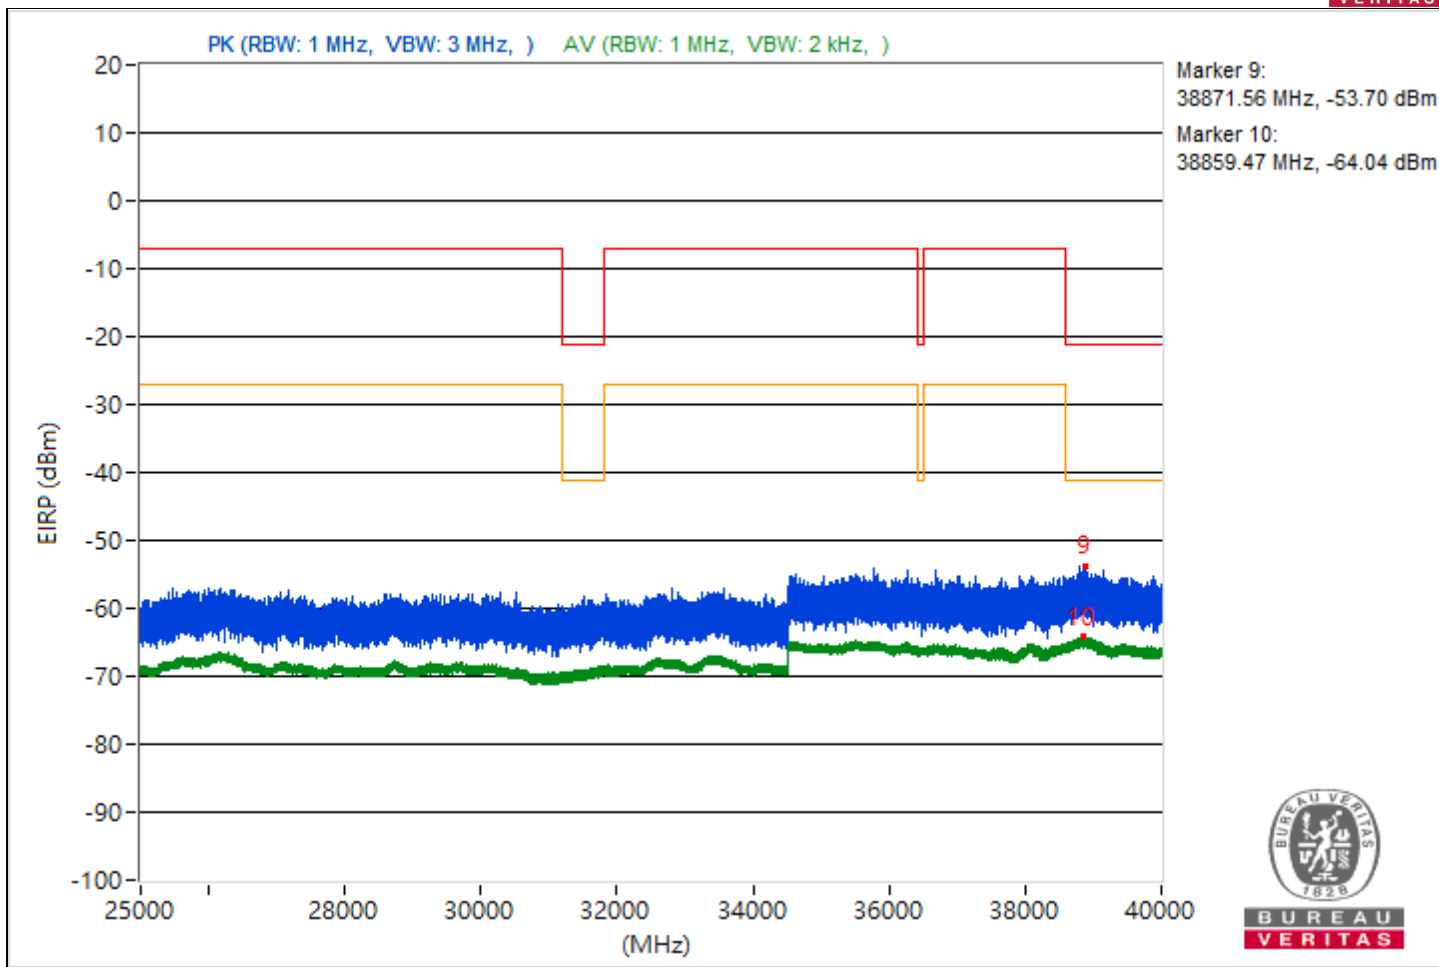


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.03	46.17 PK	74	-27.83	-55.54	-59.27	4.92	-49.09
2	3844.33	35.87 AV	54	-18.13	-67.89	-66.82	4.92	-59.39
3	7291.06	45.63 PK	74	-28.37	-55.96	-60.1	4.92	-49.63
4	7283.9	36.02 AV	54	-17.98	-67.64	-66.74	4.92	-59.24
5	19202	46.94 PK	74	-27.06	-54.67	-58.76	4.92	-48.32
6	21141.1	36.67 AV	54	-17.33	-65.96	-67.15	4.92	-58.59
7	22186.7	48.55 PK	74	-25.45	-52.65	-58.43	4.92	-46.71
8	22407.1	37.96 AV	54	-16.04	-65.67	-64.83	4.92	-57.3
9	39711.02	41.39 PK	74	-32.61	-67.68	-59.39	4.92	-53.87
10	38845.6	31.22 AV	54	-22.78	-72.34	-71.63	4.92	-64.04

Note: Margin value = Emission Level - Limit value

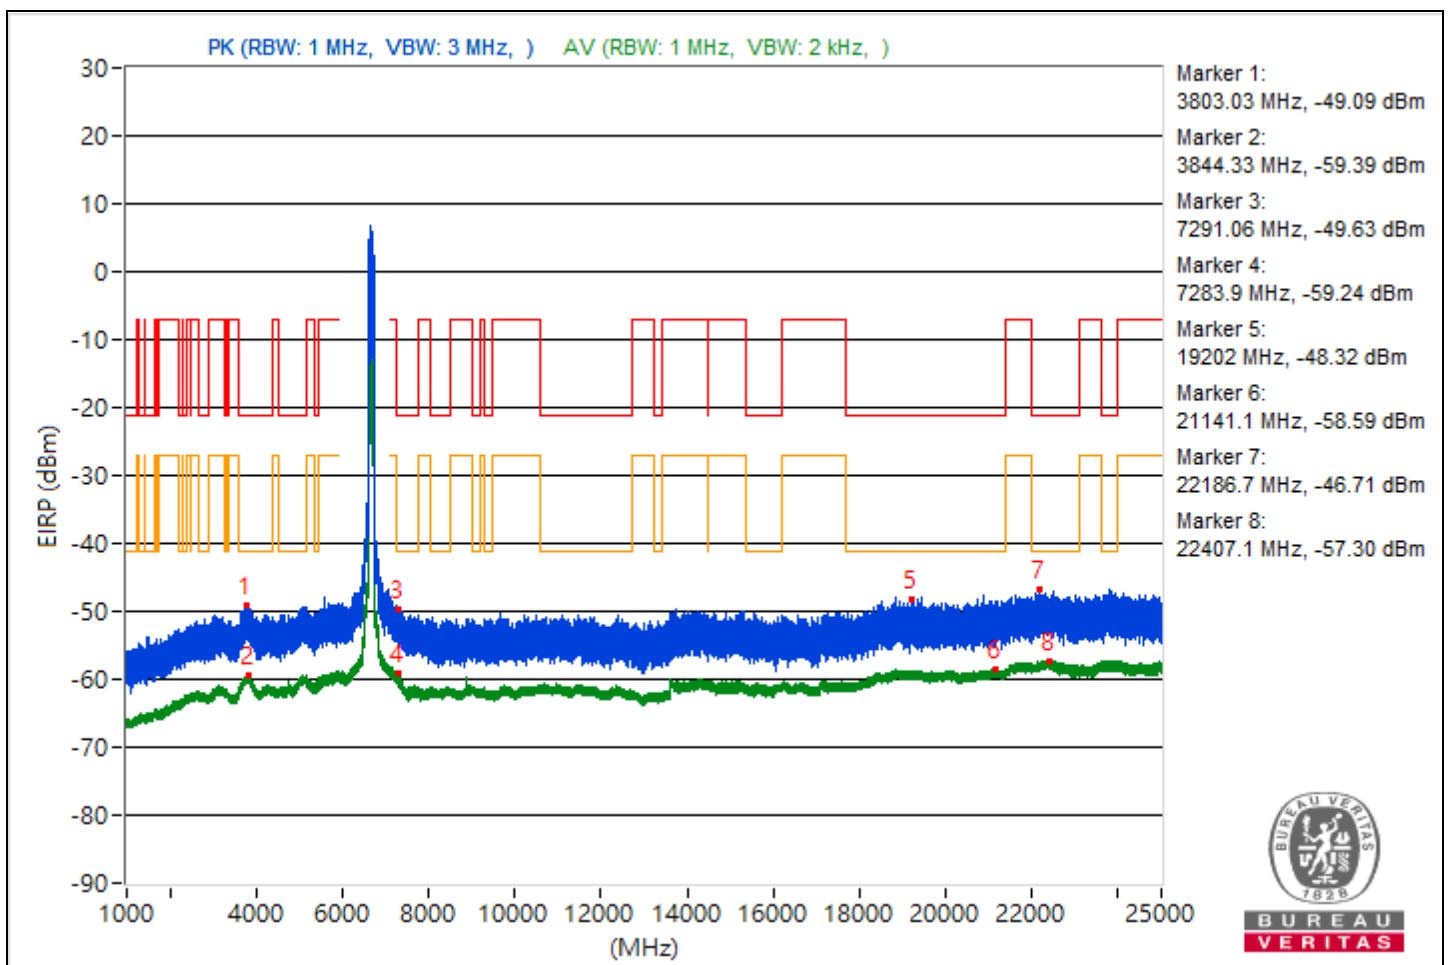


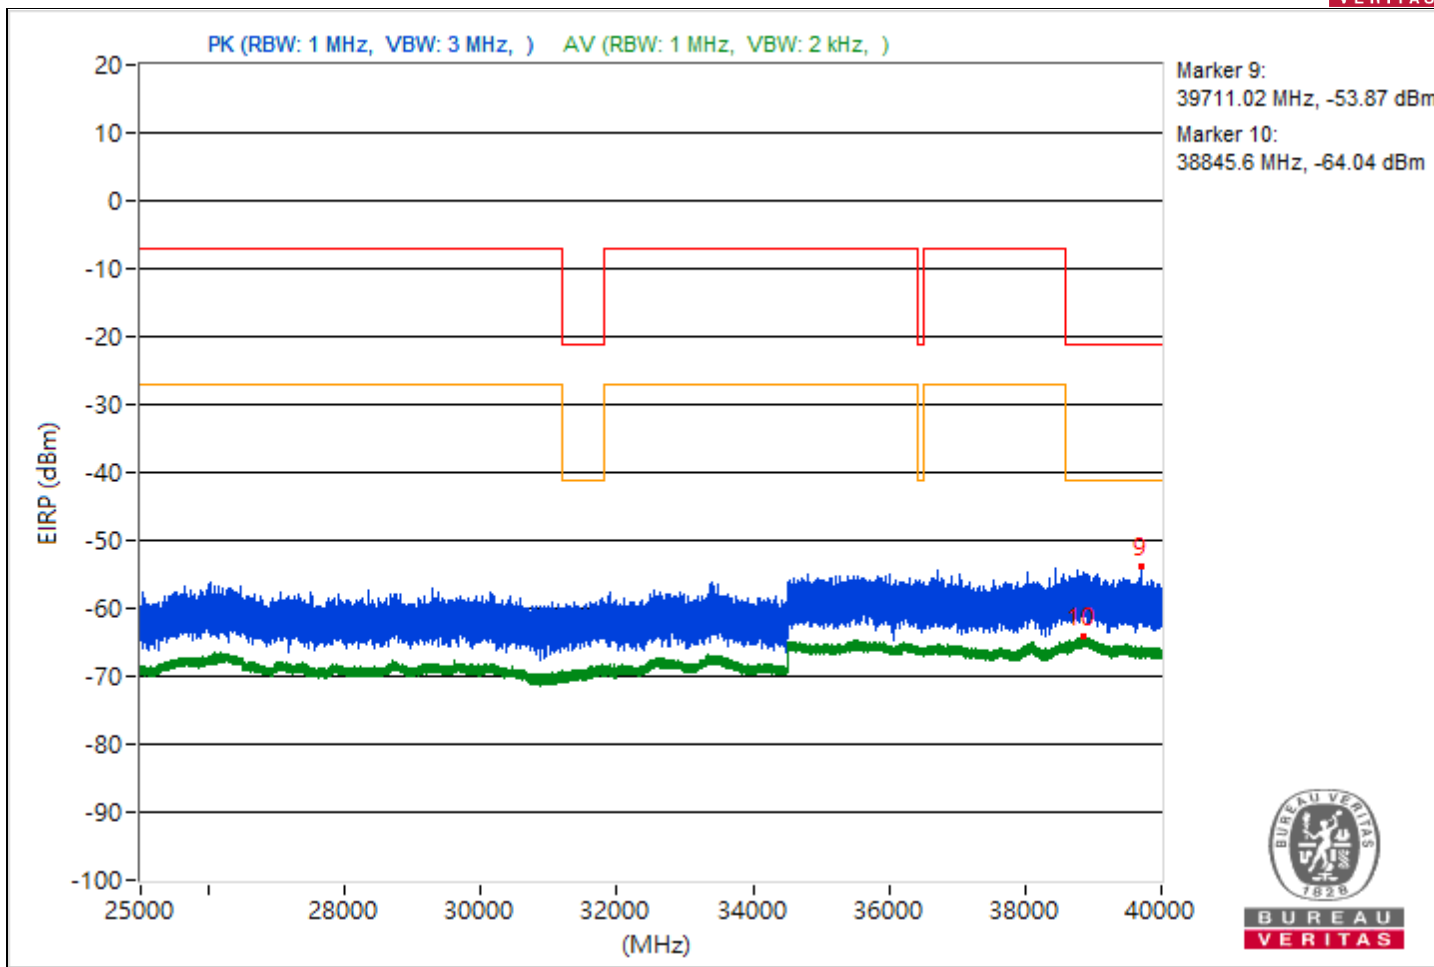


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5424.7	46.11 PK	74	-27.89	-60.09	-55.32	4.92	-49.15
2	3818.36	35.87 AV	54	-18.13	-67.75	-66.93	4.92	-59.39
3	7299.84	47.04 PK	74	-26.96	-58.34	-54.7	4.92	-48.22
4	7255.9	36.57 AV	54	-17.43	-67.1	-66.18	4.92	-58.69
5	20946.9	46.9 PK	74	-27.1	-60.37	-54.22	4.92	-48.36
6	21138.4	36.8 AV	54	-17.2	-65.8	-67.07	4.92	-58.46
7	22496.7	48.61 PK	74	-25.39	-52.42	-59.11	4.92	-46.65
8	22231.1	37.95 AV	54	-16.05	-65.88	-64.68	4.92	-57.31
9	38745.16	40.96 PK	74	-33.04	-66.15	-60.21	4.92	-54.3
10	38862.58	30.96 AV	54	-23.04	-72.86	-71.67	4.92	-64.3

Note: Margin value = Emission Level - Limit value

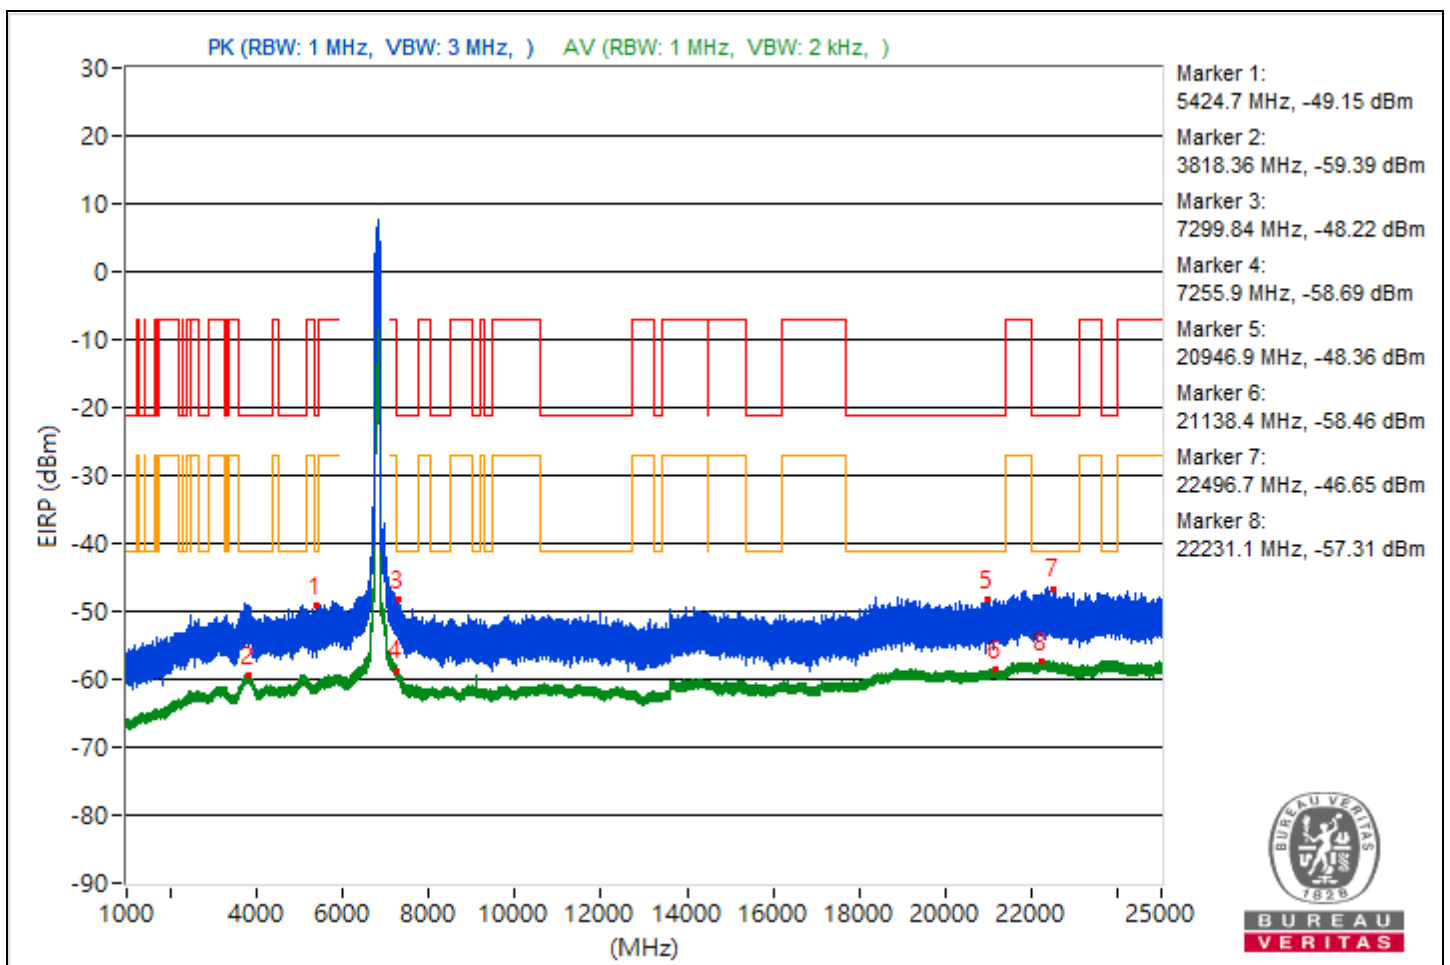


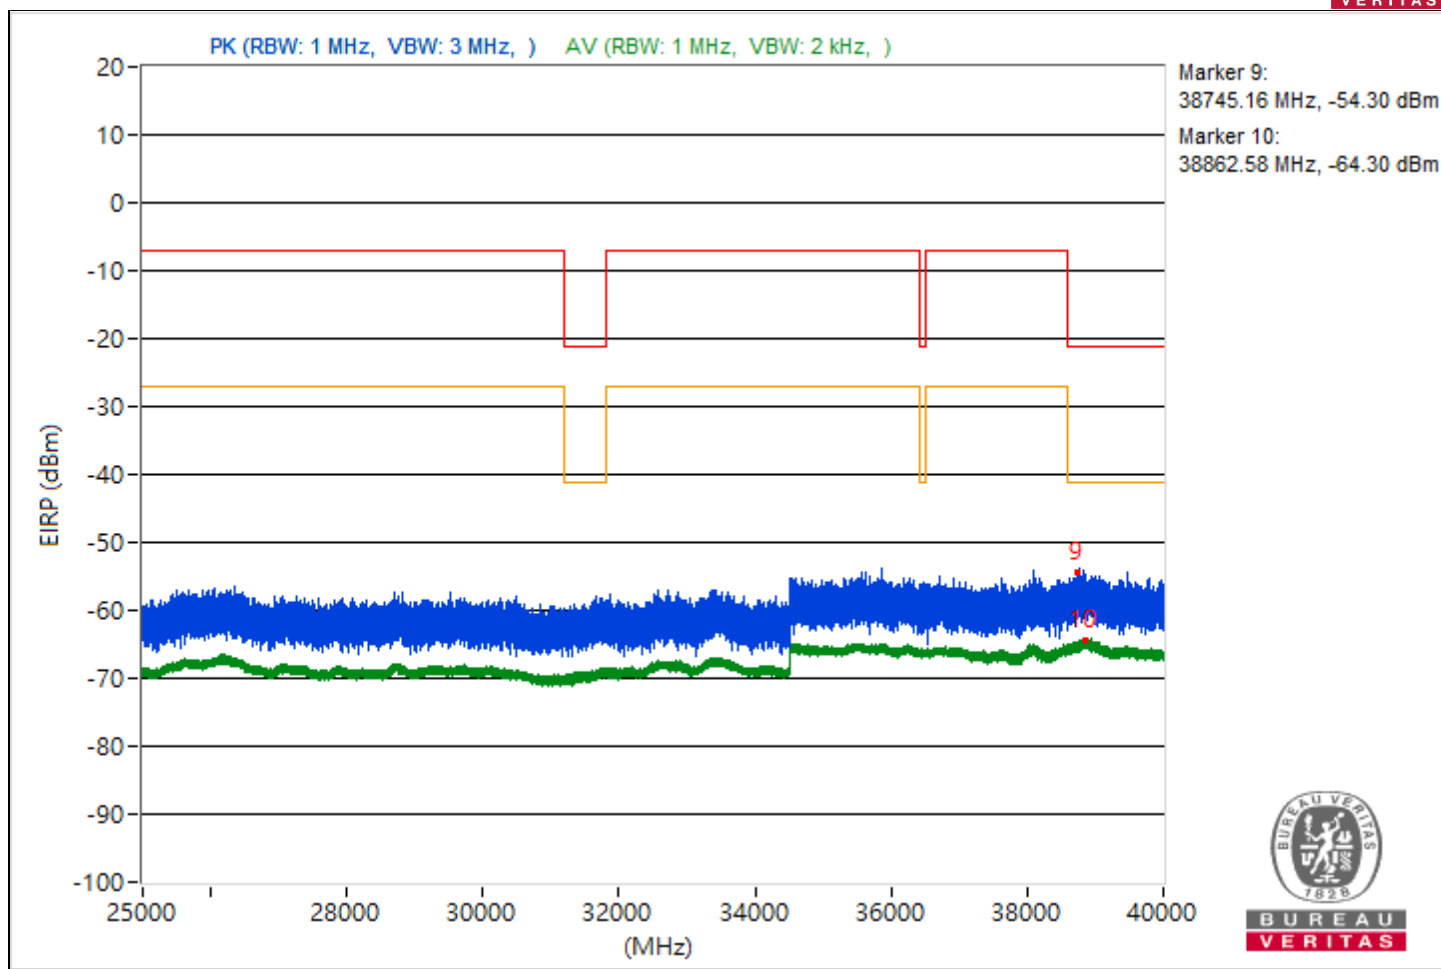


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.7	45.53 PK	74	-28.47	-55.79	-60.99	4.92	-49.73
2	3821.62	35.78 AV	54	-18.22	-68.04	-66.86	4.92	-59.48
3	7280.32	47.31 PK	74	-26.69	-57.24	-54.84	4.92	-47.95
4	7256.83	38.13 AV	54	-15.87	-64.7	-65.45	4.92	-57.13
5	18788.5	47.41 PK	74	-26.59	-58.73	-54.03	4.92	-47.85
6	18835.3	36.59 AV	54	-17.41	-67.22	-66.06	4.92	-58.67
7	22309.1	48.41 PK	74	-25.59	-56.68	-53.46	4.92	-46.85
8	23864.2	38.05 AV	54	-15.95	-65.74	-64.61	4.92	-57.21
9	38810.58	41.2 PK	74	-32.8	-60.21	-65.05	4.92	-54.06
10	38946.58	30.76 AV	54	-23.24	-71.6	-73.45	4.92	-64.5

Note: Margin value = Emission Level - Limit value

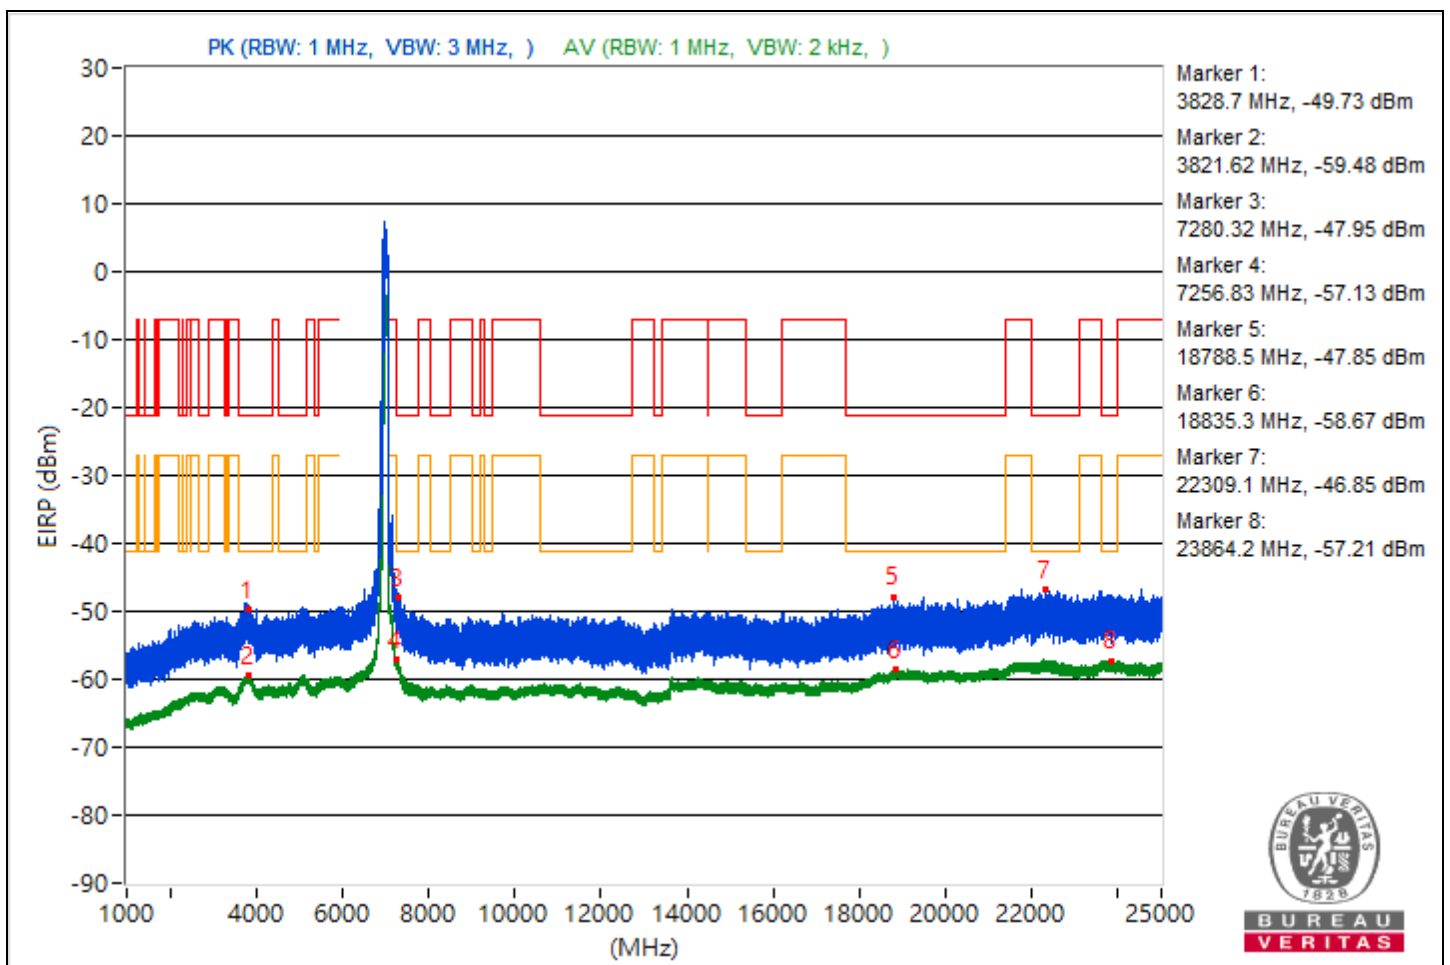

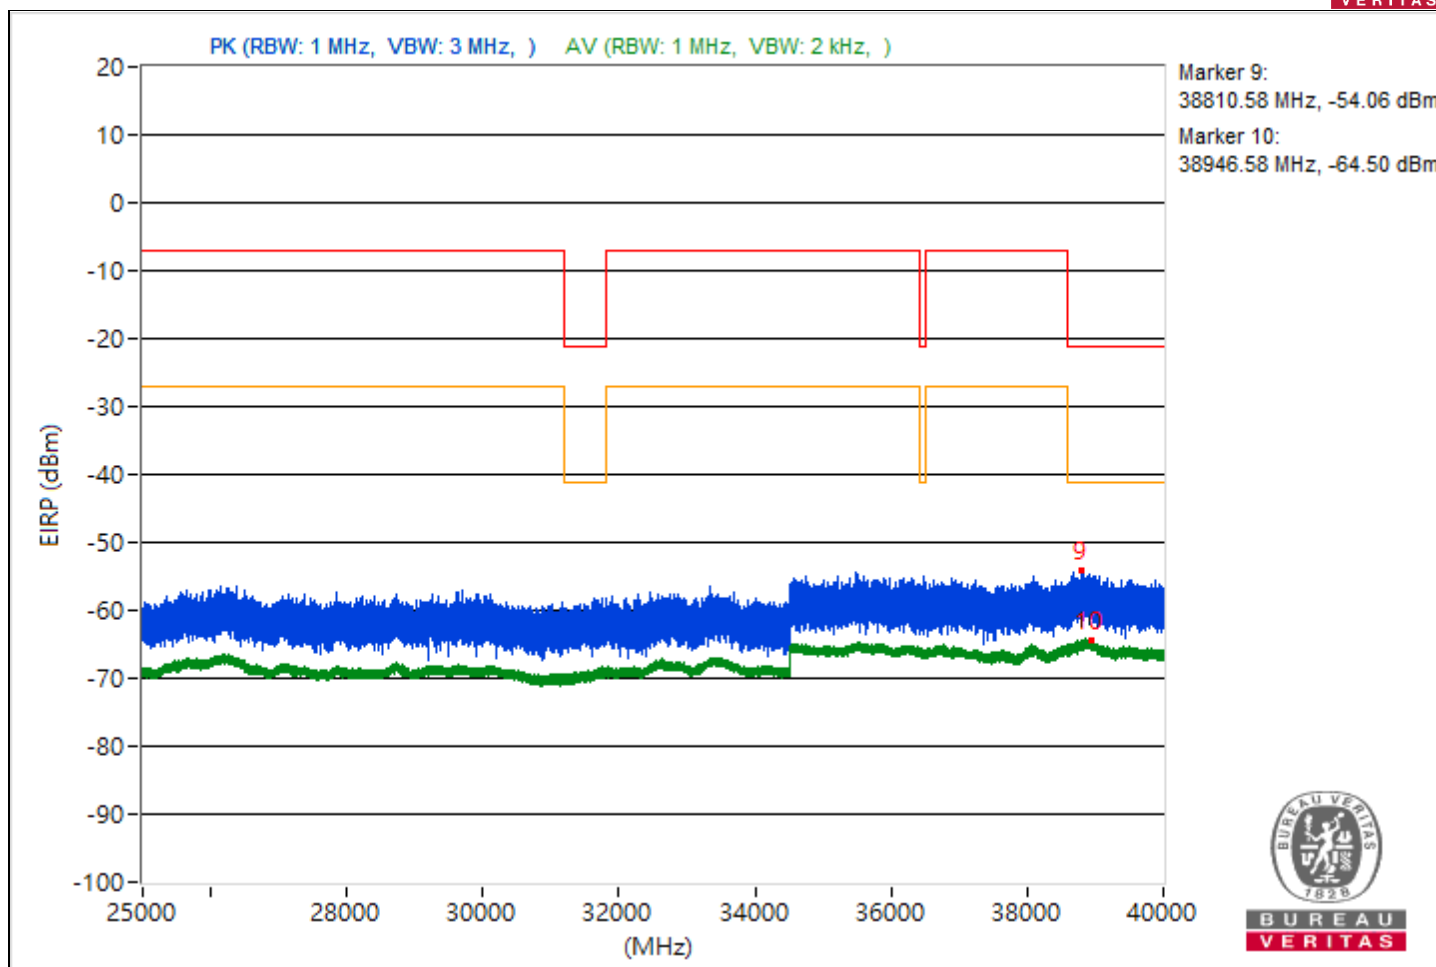


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.43	102.07 PK			-3.82	0.76	4.76	6.81
2	*5955.73	92.37 AV			-10.58	-10.74	4.76	-2.89
3	#5896	64.97 PK	88.26	-23.29	-40.44	-36.53	4.76	-30.29
4	#5841.52	53.85 AV	68.26	-14.41	-49.05	-49.33	4.76	-41.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

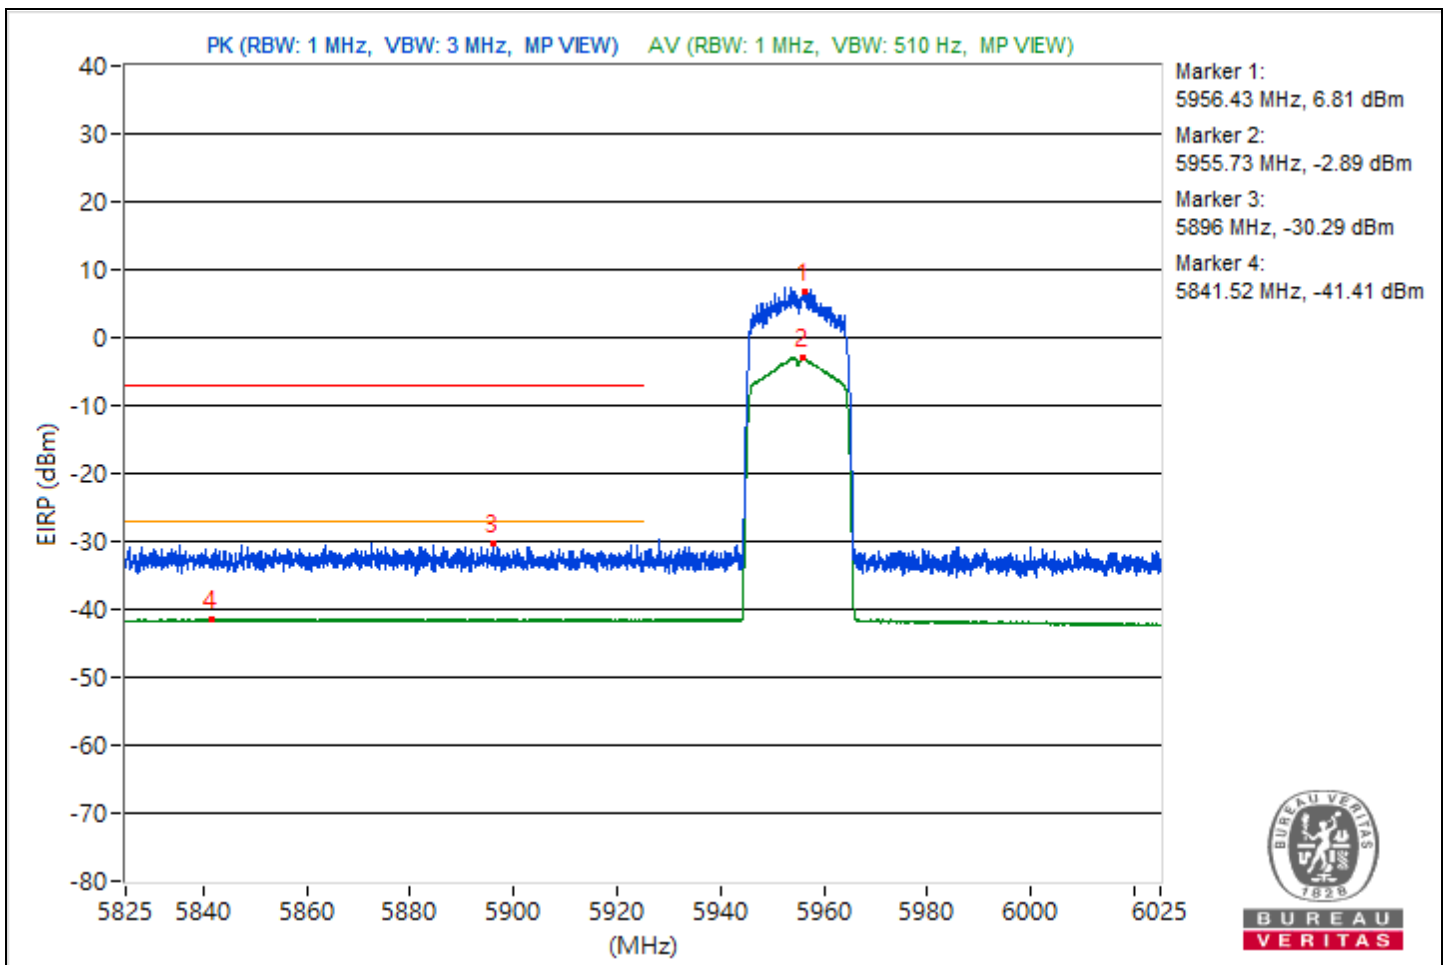





RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	48.5 PK	88.2	-39.7	-50.85	-50.9	4.09	-46.76
2	#7125	39.05 AV	68.2	-29.15	-60.33	-60.3	4.09	-56.21

- Notes:
1. Margin value = Emission Level - Limit value
 2. "#": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

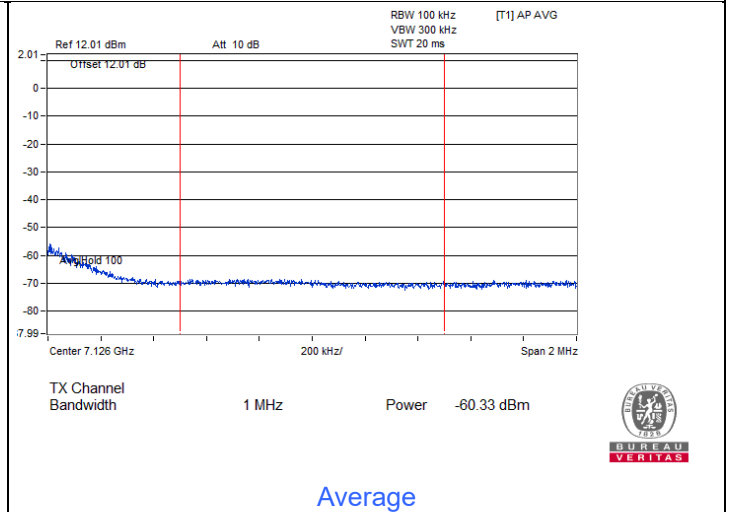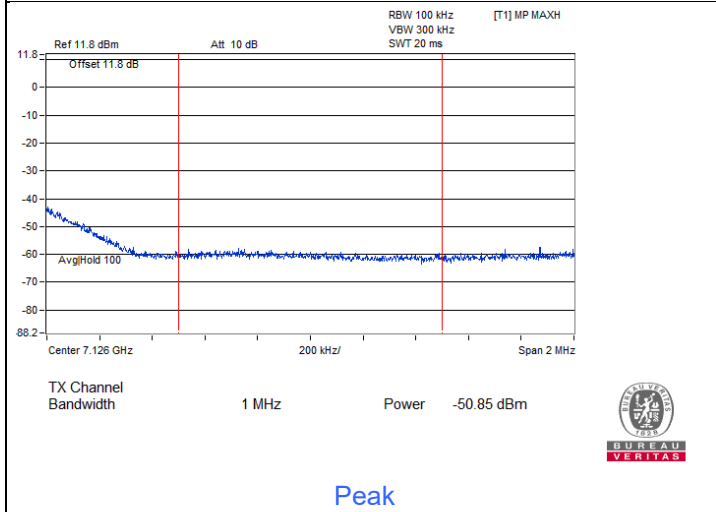

Chain 1

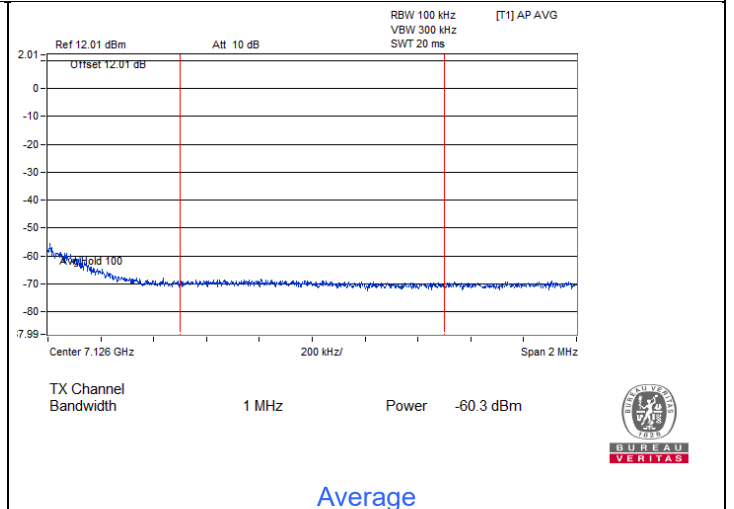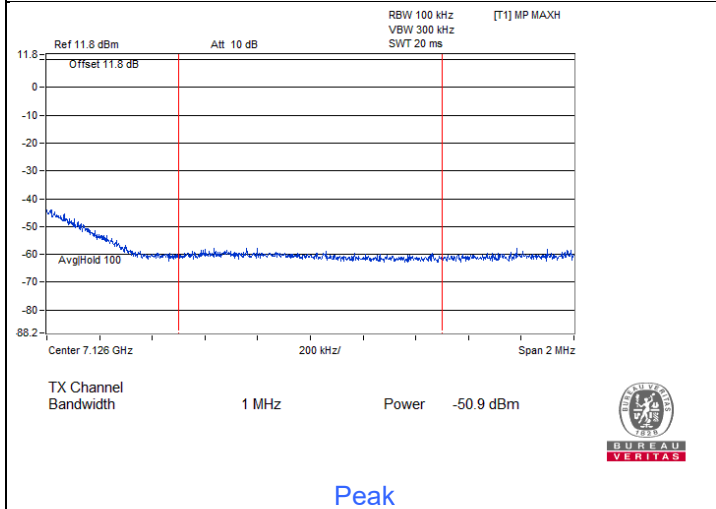


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5969.15	103.49 PK			-1.68	1.88	4.76	8.23
2	*5963.98	92.73 AV			-10.31	-10.29	4.76	-2.53
3	#5921.82	64.94 PK	88.26	-23.32	-36.83	-39.86	4.76	-30.32
4	#5865.5	53.81 AV	68.26	-14.45	-49.45	-49	4.76	-41.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

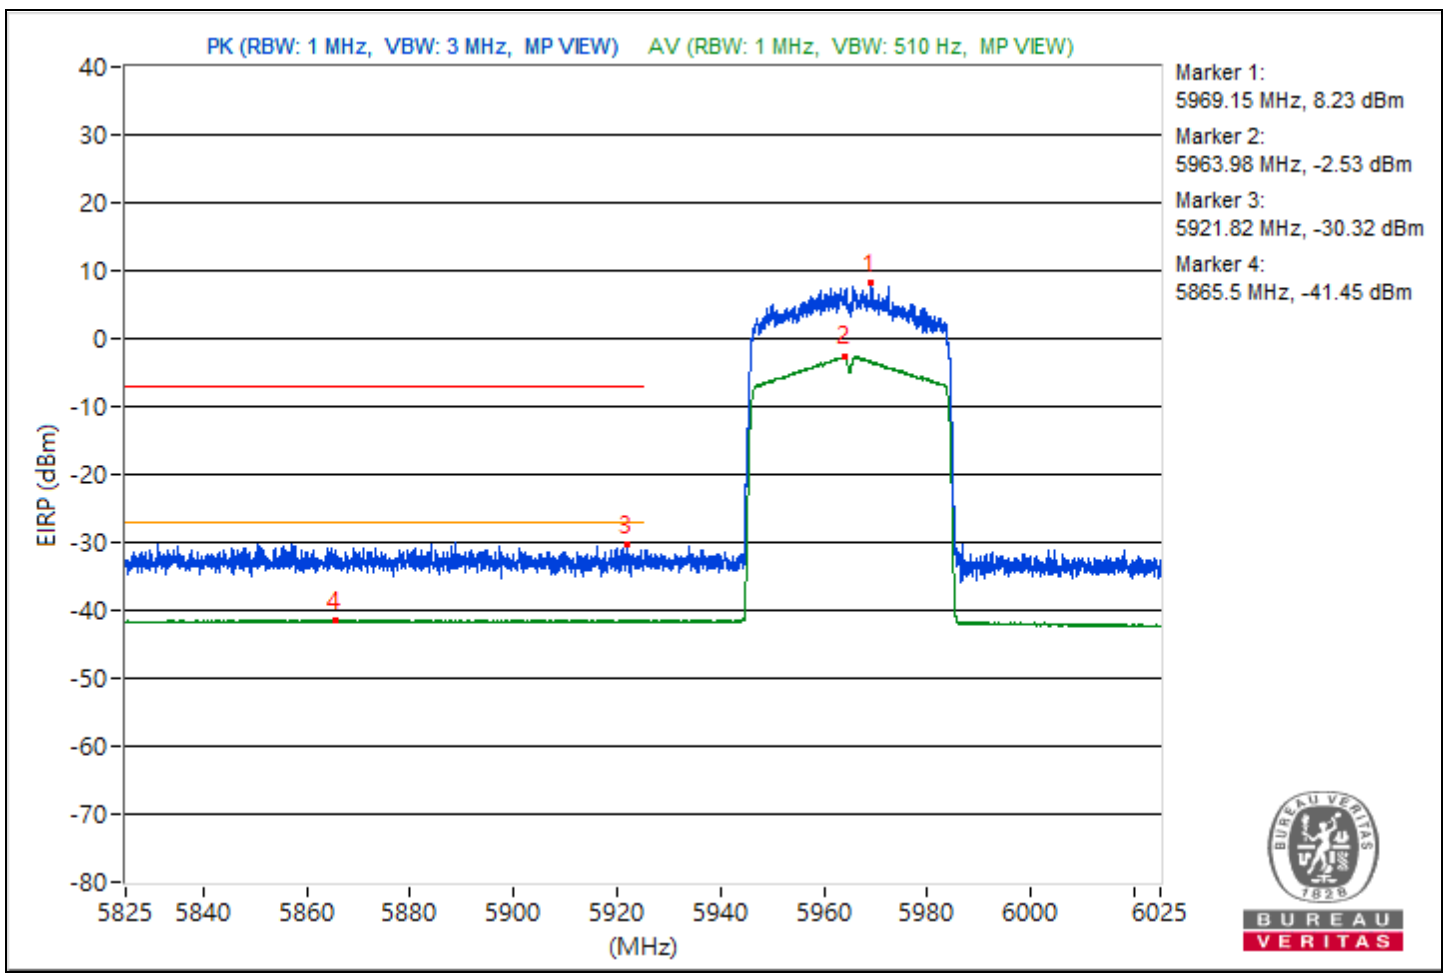


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7080.65	102.53 PK			2.19	-3.73	4.09	7.27
2	*7084	92.06 AV			-9.89	-10.75	4.09	-3.2
3	#7197.8	54.45 PK	88.26	-33.81	-46.57	-49.85	4.09	-40.81
4	#7183.52	43.28 AV	68.26	-24.98	-59.31	-58.85	4.09	-51.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

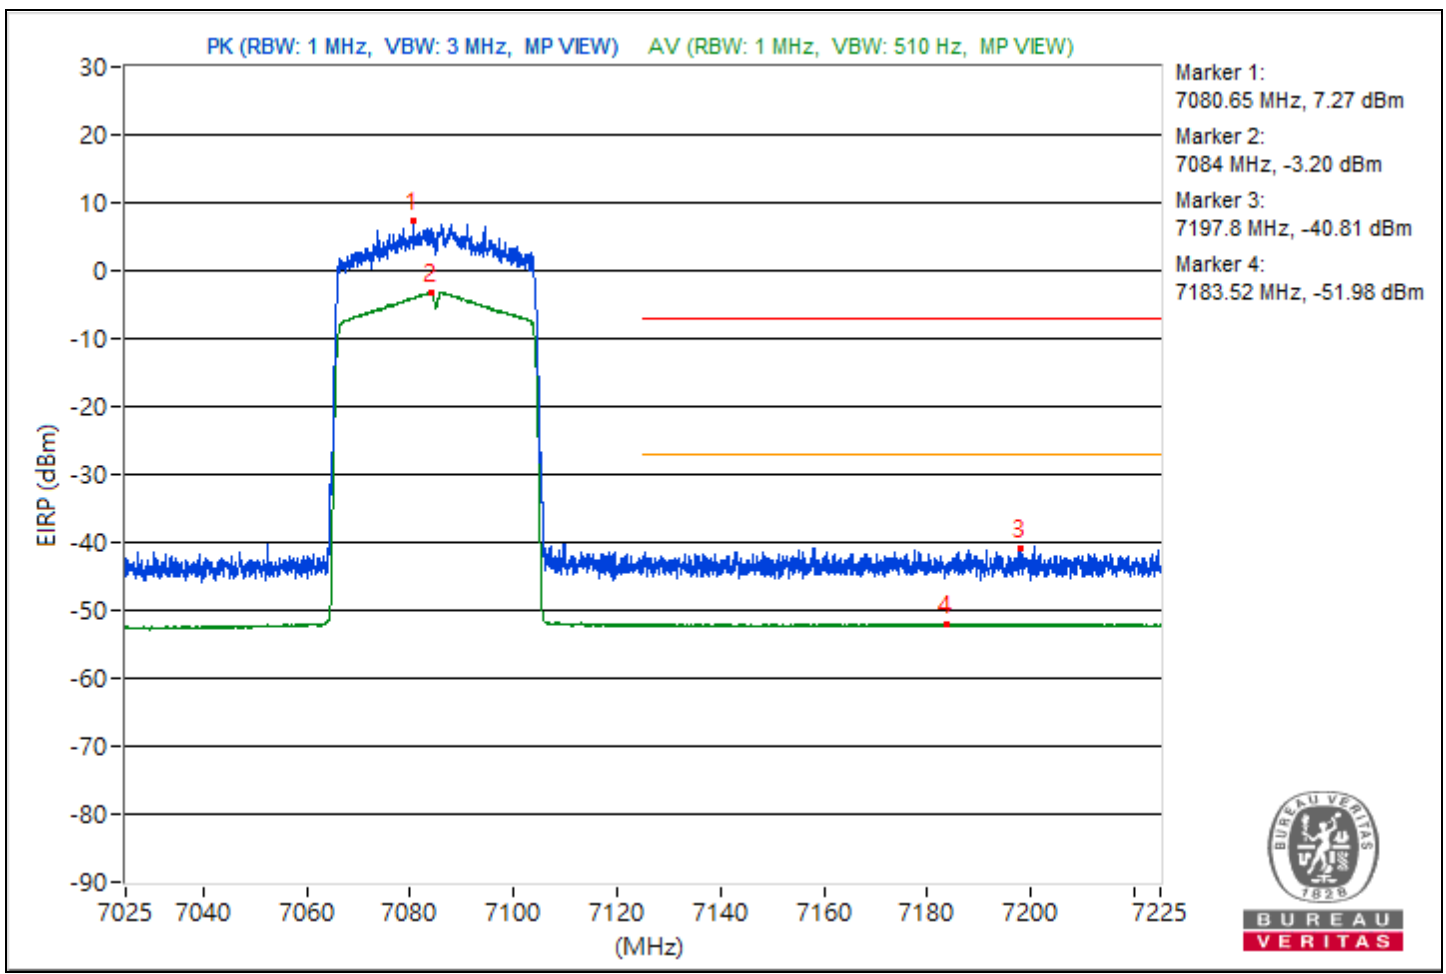


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.98	102.6 PK			-2.53	0.97	4.76	7.34
2	*5983.8	90.66 AV			-16.18	-10.37	4.76	-4.6
3	#5872.73	65.26 PK	88.26	-23	-35.8	-41.49	4.76	-30
4	#5854.57	54.38 AV	68.26	-13.88	-48.31	-49.02	4.76	-40.88

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

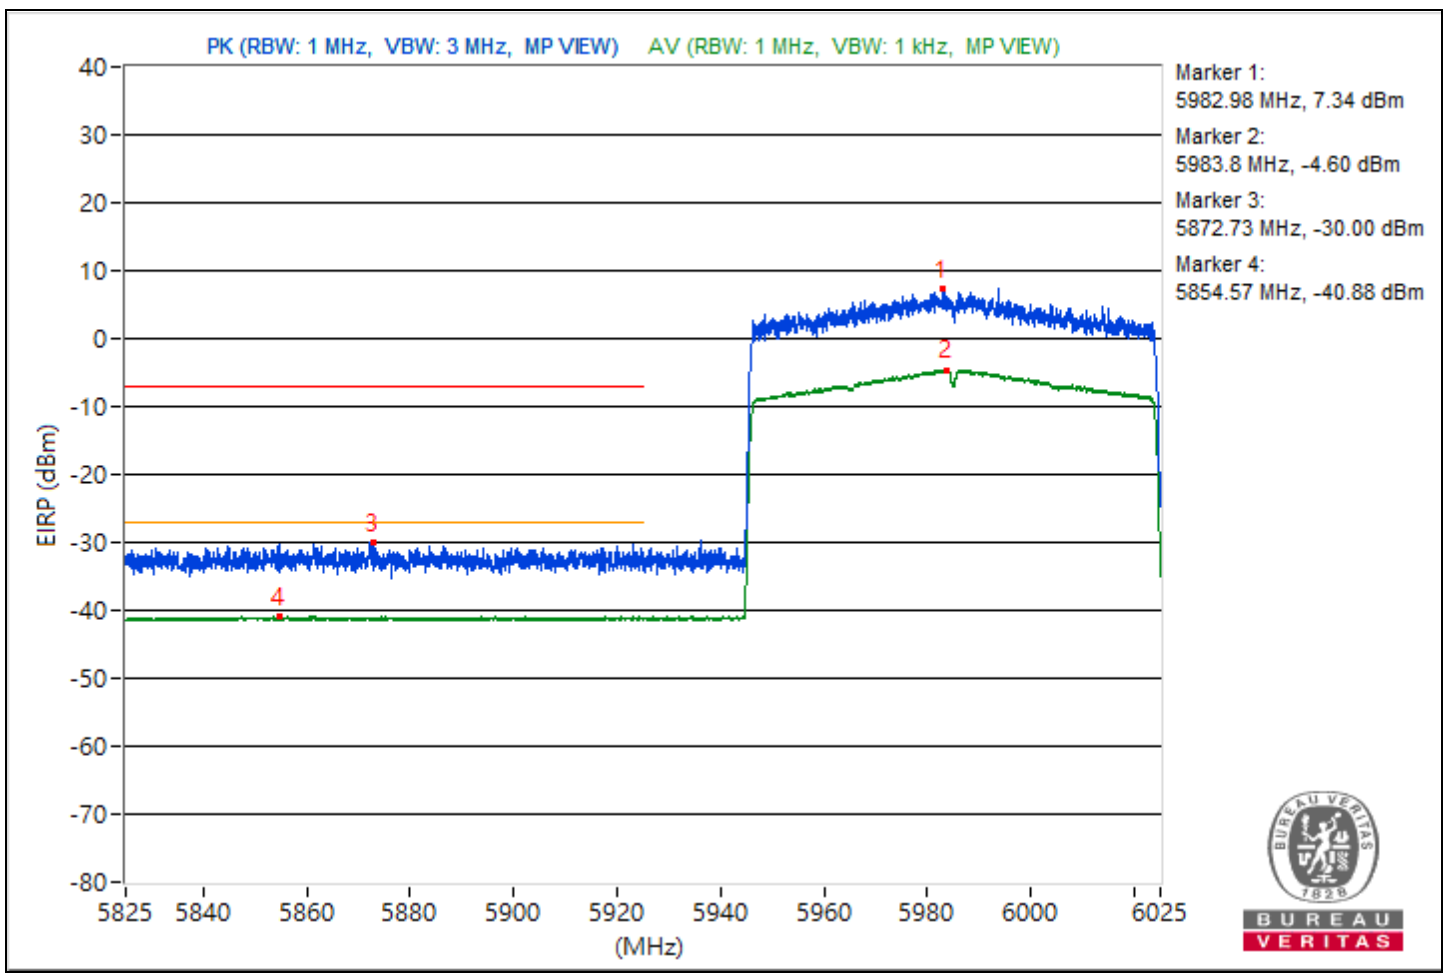


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7026.02	102.65 PK			-1.76	1.68	4.09	7.39
2	*7026.43	92.4 AV			-9.61	-10.34	4.09	-2.86
3	#7147.8	54.77 PK	88.26	-33.49	-45.54	-51.58	4.09	-40.49
4	#7127.5	44.64 AV	68.26	-23.62	-57.38	-58.1	4.09	-50.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

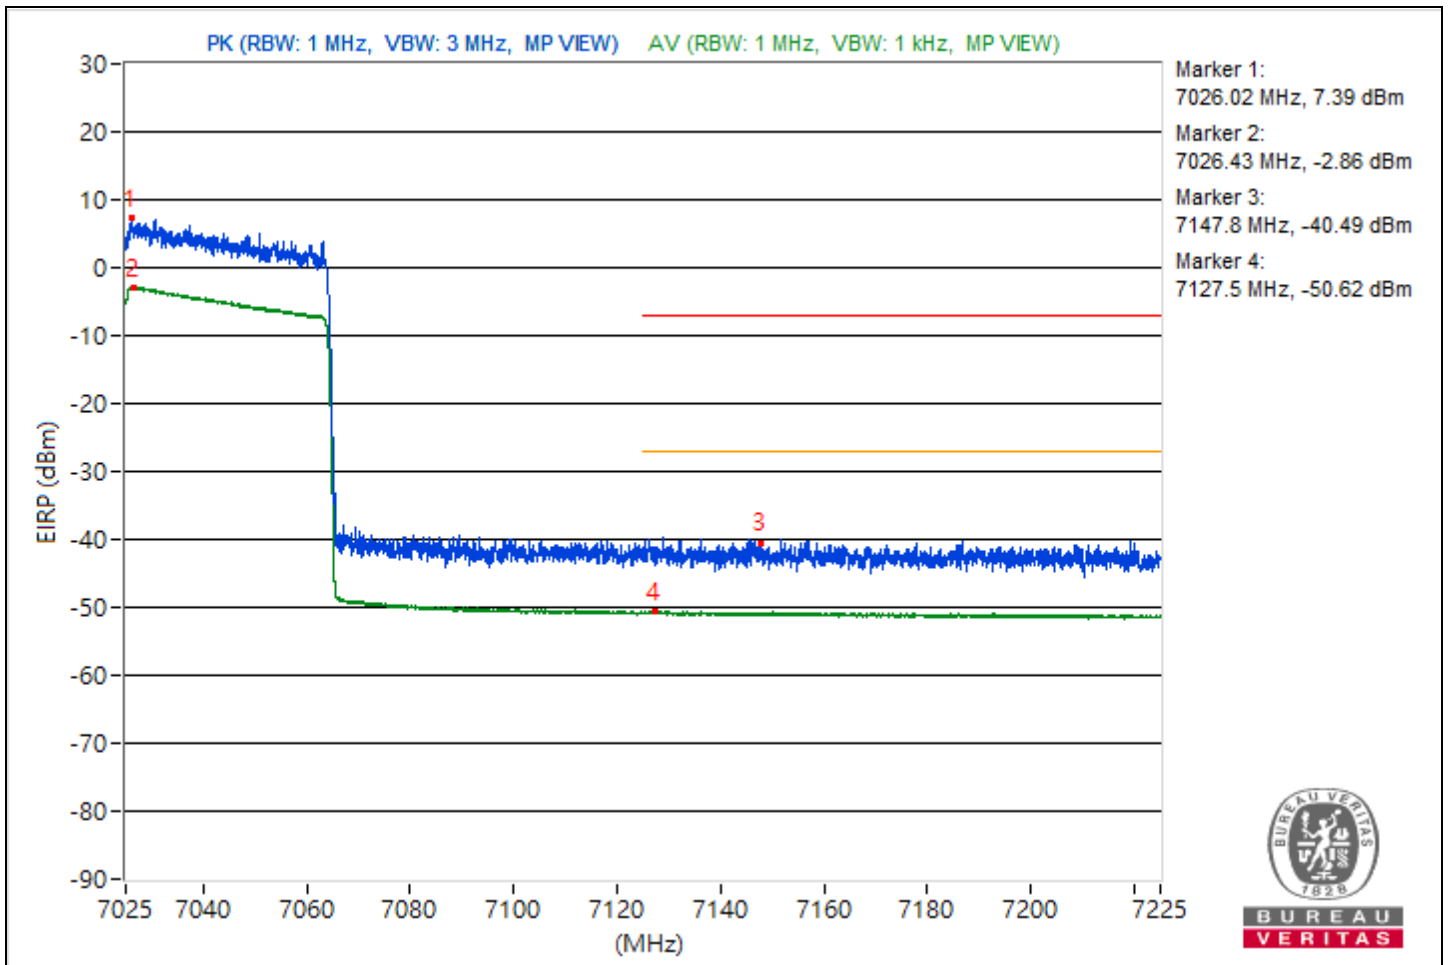


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.6	103.57 PK			1.83	-1.31	4.76	8.31
2	*6022.93	92.59 AV			-10.22	-10.67	4.76	-2.67
3	#5901.32	64.92 PK	88.26	-23.34	-36.61	-40.42	4.76	-30.34
4	#5919.43	54.75 AV	68.26	-13.51	-48.47	-48.11	4.76	-40.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

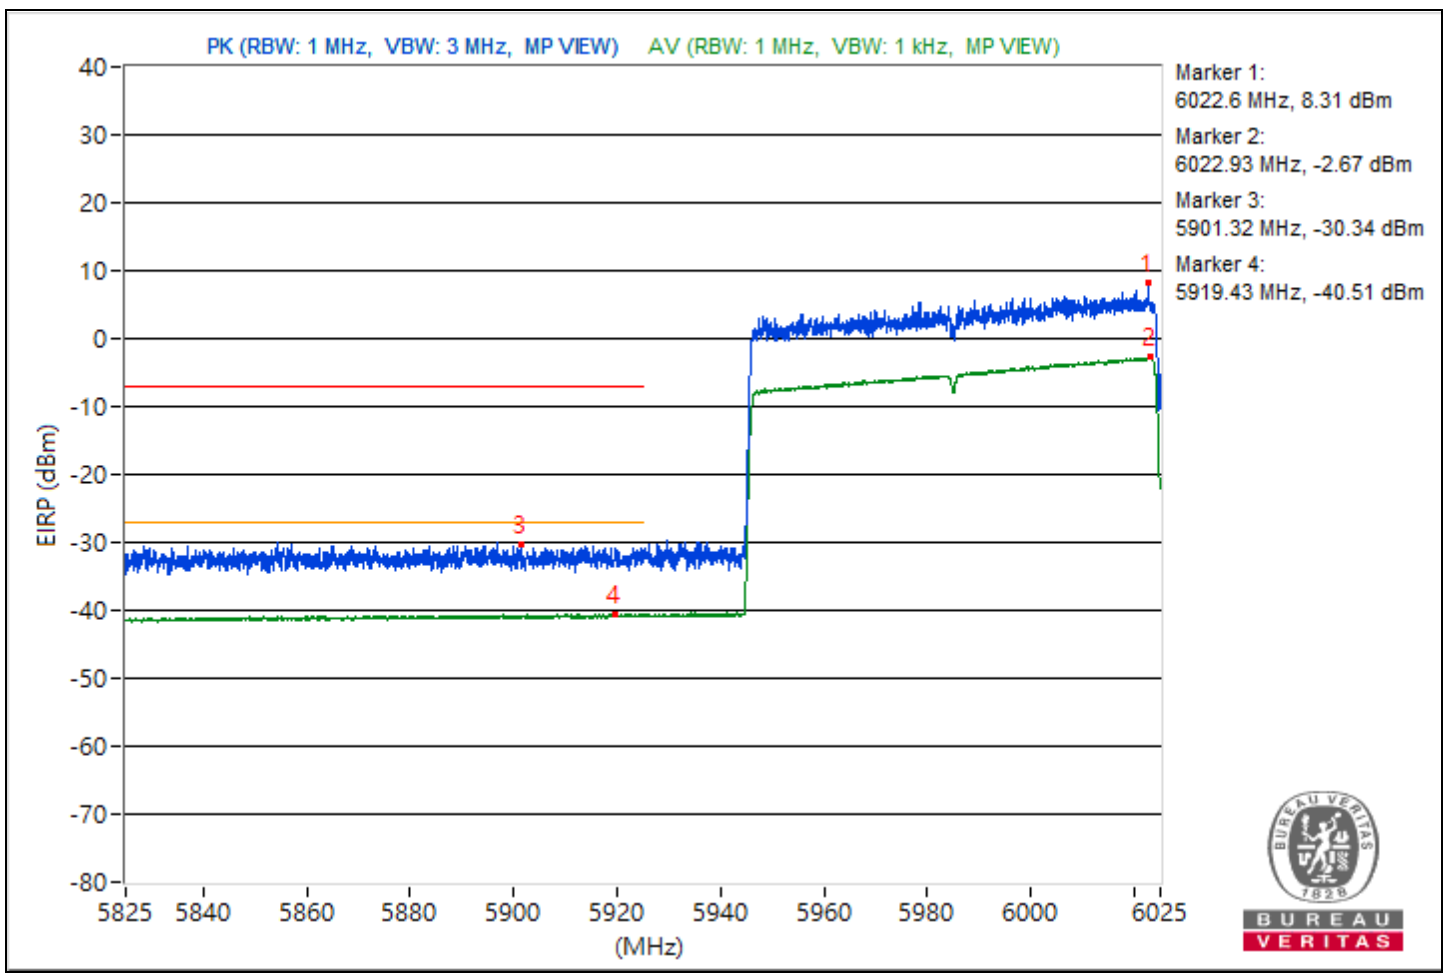


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7028.55	100.24 PK			-0.59	-4.51	4.09	4.98
2	*7026.32	89.82 AV			-12.21	-12.9	4.09	-5.44
3	#7128.93	61.22 PK	88.26	-27.04	-40.96	-41.33	4.09	-34.04
4	#7125.52	48.6 AV	68.26	-19.66	-53.03	-54.65	4.09	-46.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

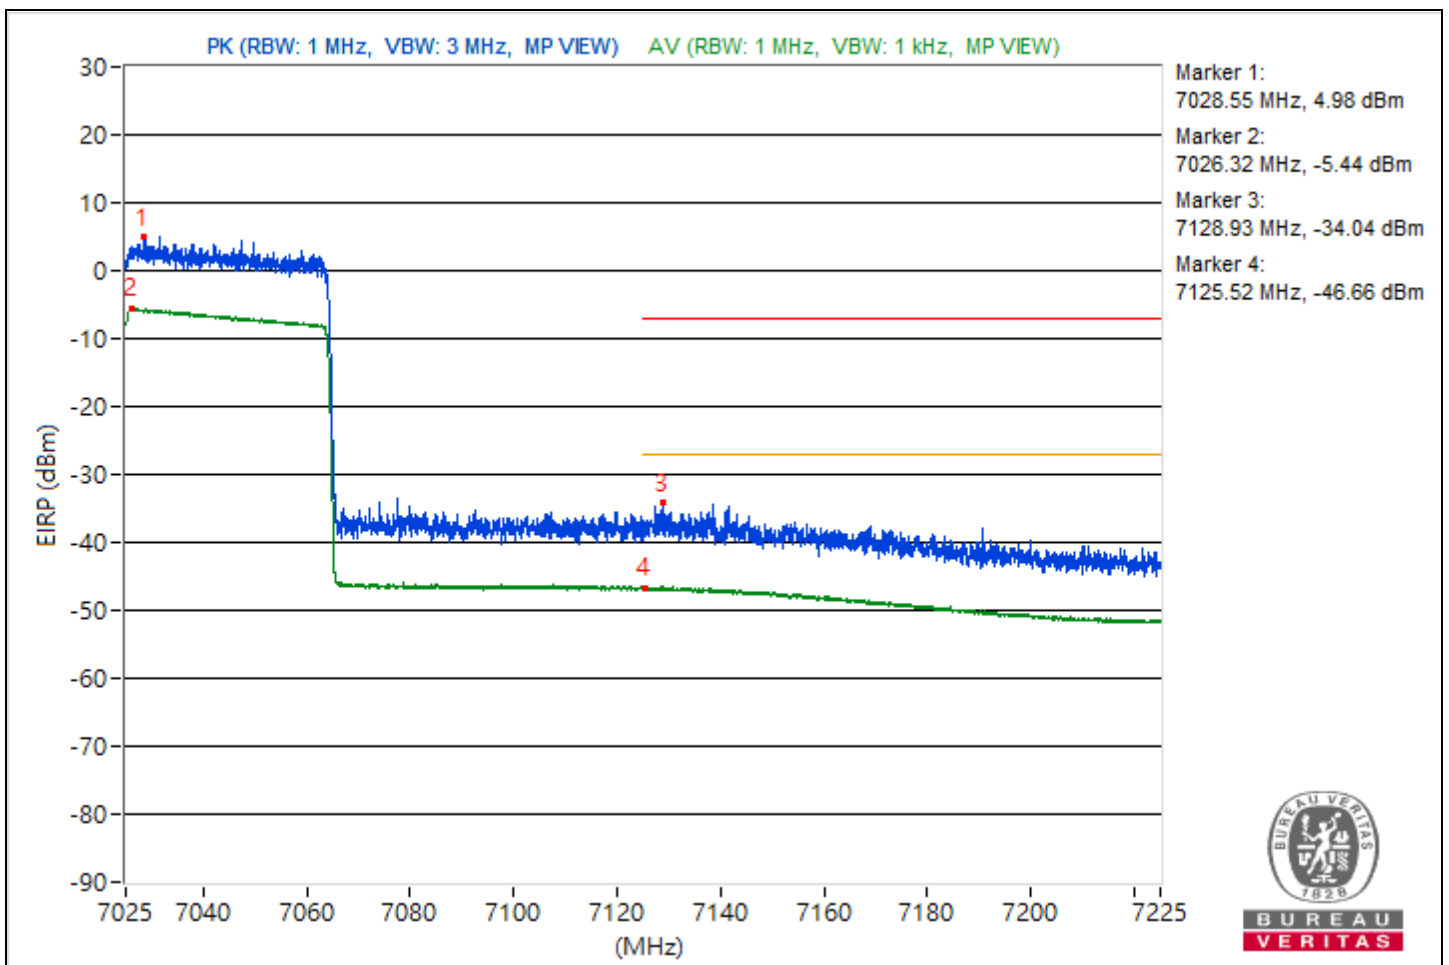


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5947.07	106.74 PK			3.33	4.05	4.76	11.48
2	*5946.35	95.54 AV			-7.21	-7.79	4.76	0.28
3	#5855.65	64.4 PK	88.26	-23.86	-36.74	-42.08	4.76	-30.86
4	#5849.05	53.79 AV	68.26	-14.47	-48.98	-49.53	4.76	-41.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.


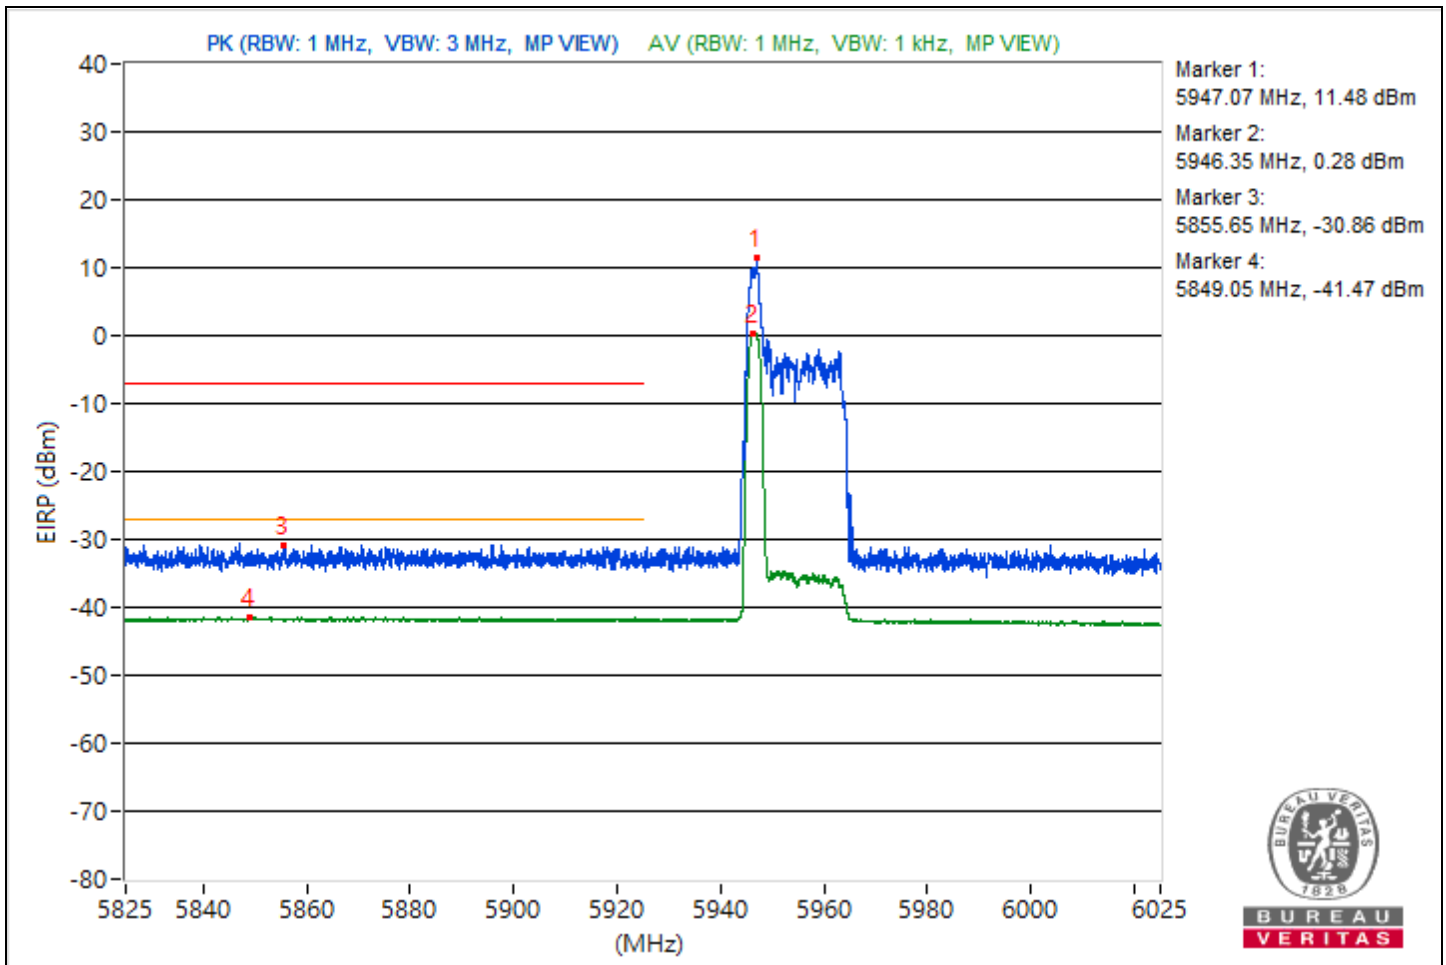


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	60.26 PK	88.2	-27.94	-39.09	-39.13	4.09	-35.00
2	#7125	46.68 AV	68.2	-21.52	-52.85	-52.67	4.09	-48.58

- Notes:
1. Margin value = Emission Level - Limit value
 2. "#": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

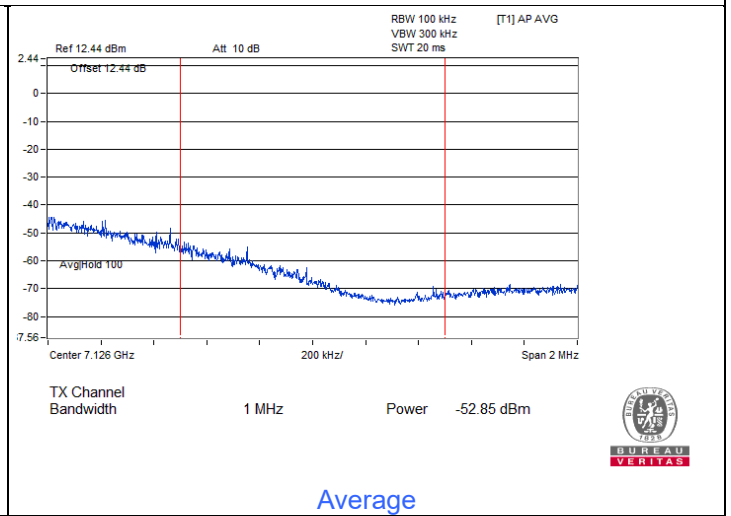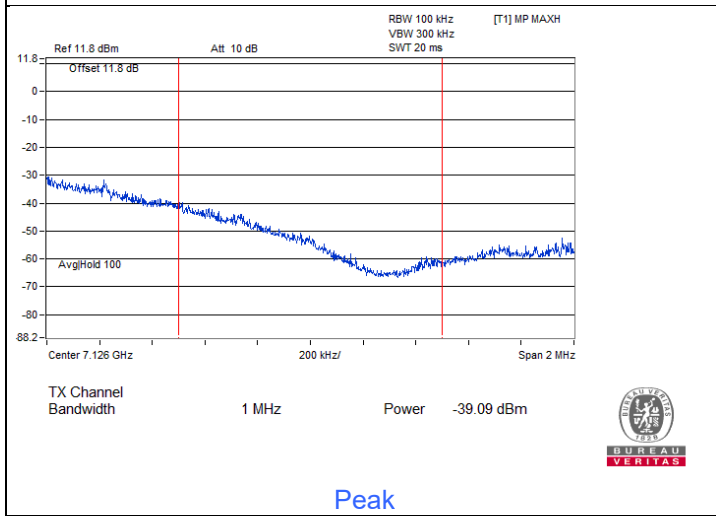

Chain 1

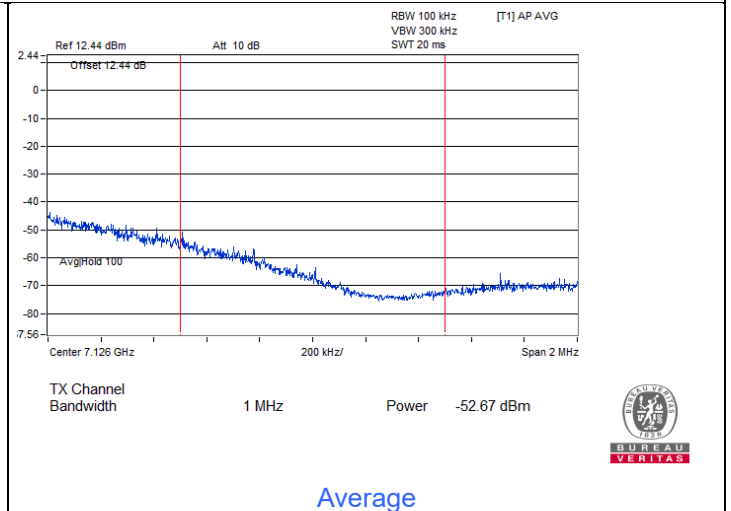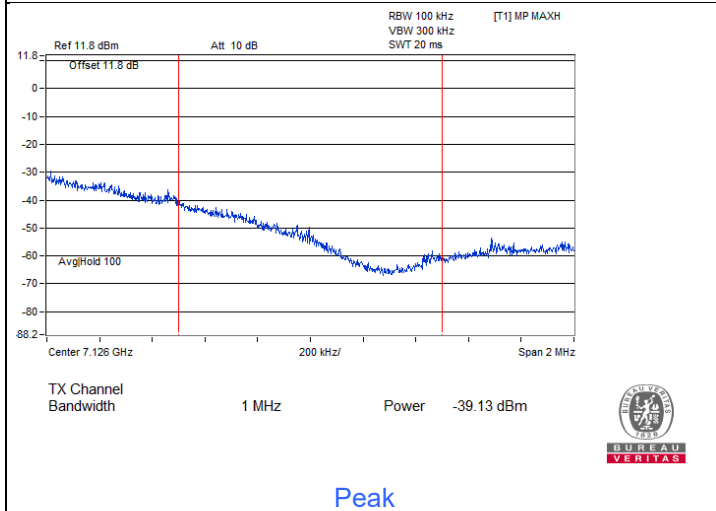


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.27	104.03 PK			-1.82	2.7	4.76	8.77
2	*5947.98	92.6 AV			-10.17	-10.71	4.76	-2.66
3	#5844.5	65.06 PK	88.26	-23.2	-39.5	-36.84	4.76	-30.2
4	#5864.93	53.84 AV	68.26	-14.42	-48.98	-49.41	4.76	-41.42

Notes:



1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

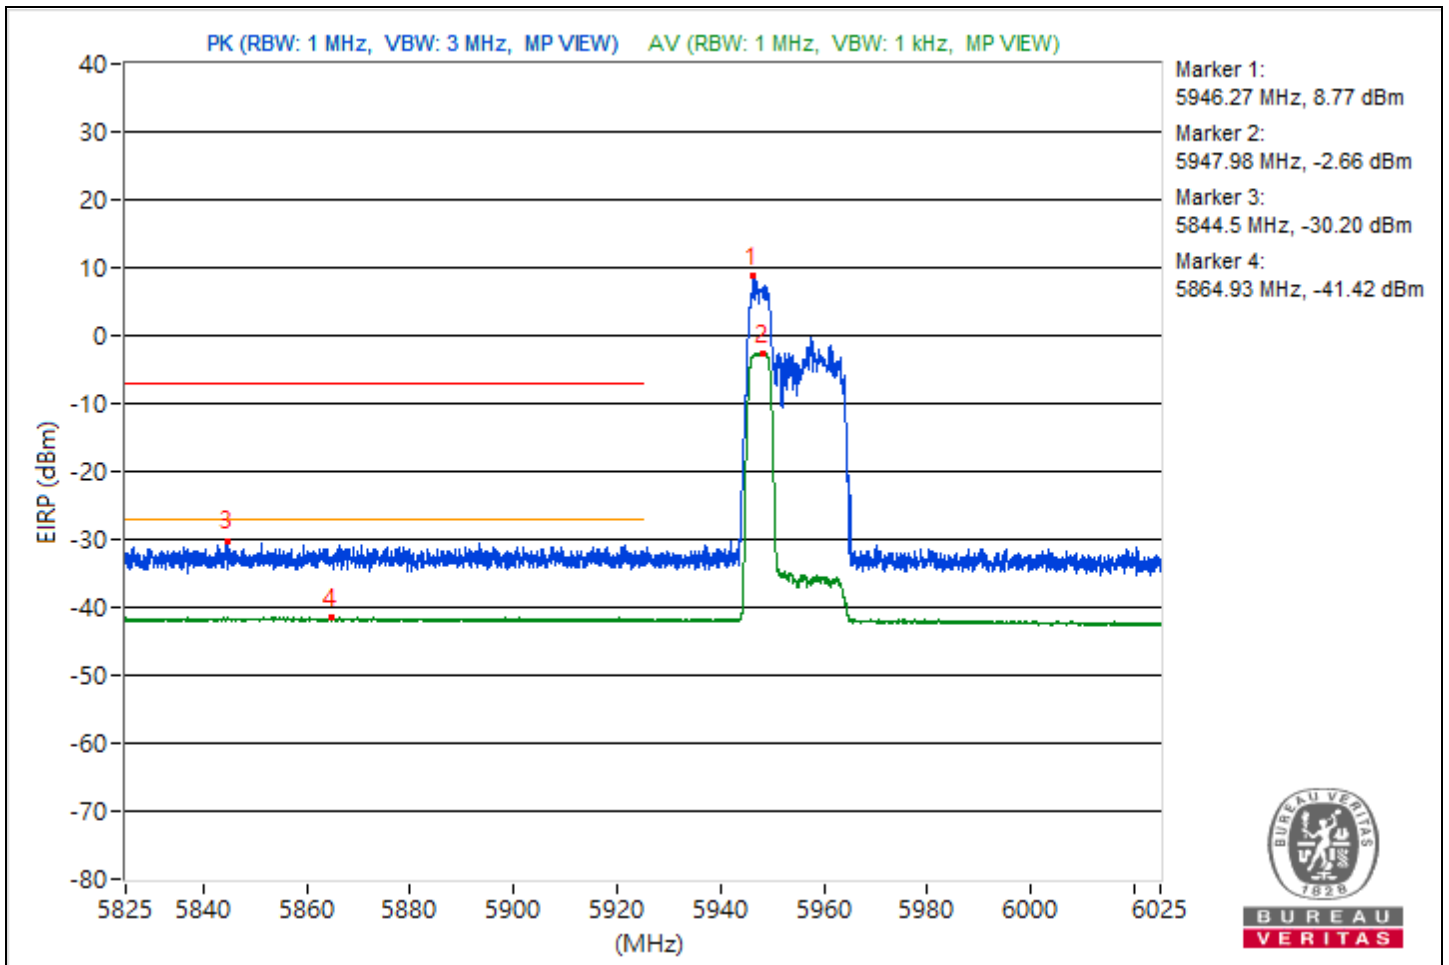

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	60.77 PK	88.2	-27.43	-38.58	-38.61	4.09	-34.49
2	#7125	47.22 AV	68.2	-20.98	-52.19	-52.13	4.09	-48.04

- Notes:
1. Margin value = Emission Level - Limit value
 2. "#": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

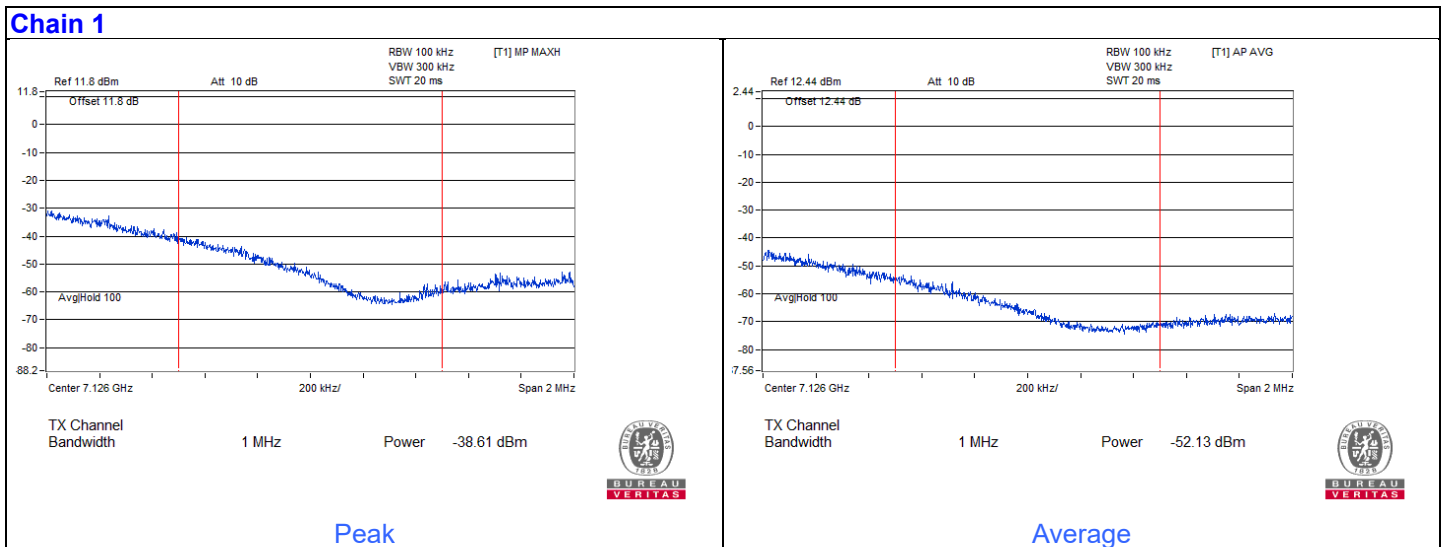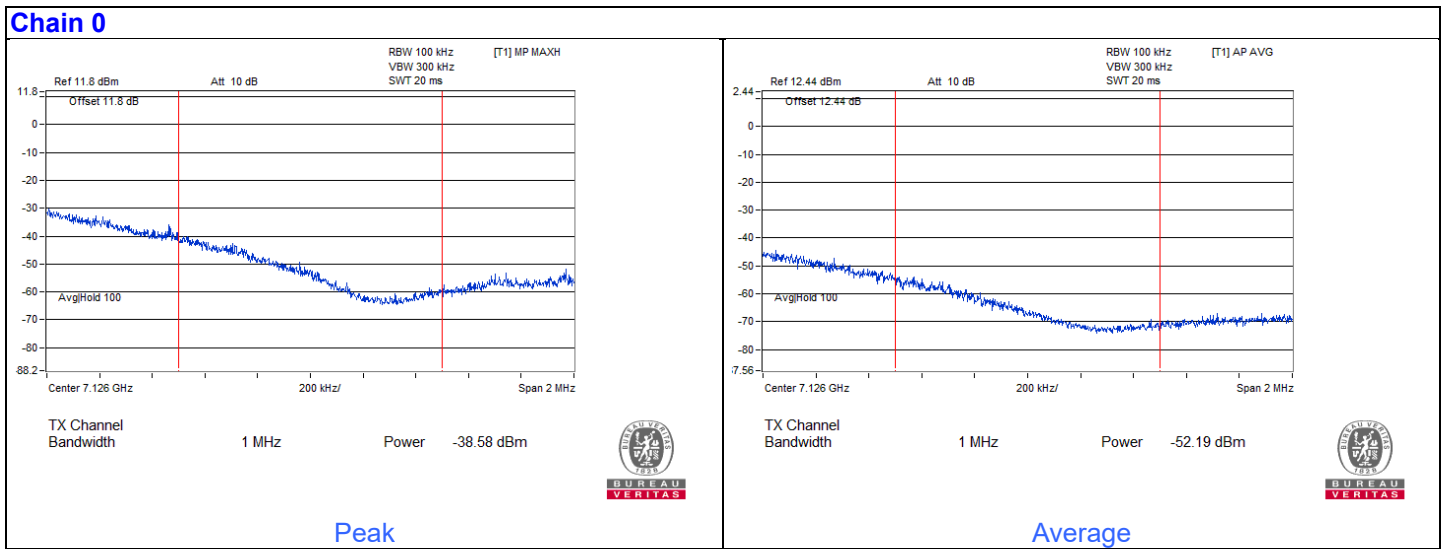


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5949.3	103.2 PK			1.28	-1.32	4.76	7.94
2	*5946.98	92.3 AV			-10.53	-10.95	4.76	-2.96
3	#5842.05	65.47 PK	88.26	-22.79	-35.4	-42.05	4.76	-29.79
4	#5894.98	53.77 AV	68.26	-14.49	-49.02	-49.51	4.76	-41.49

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.


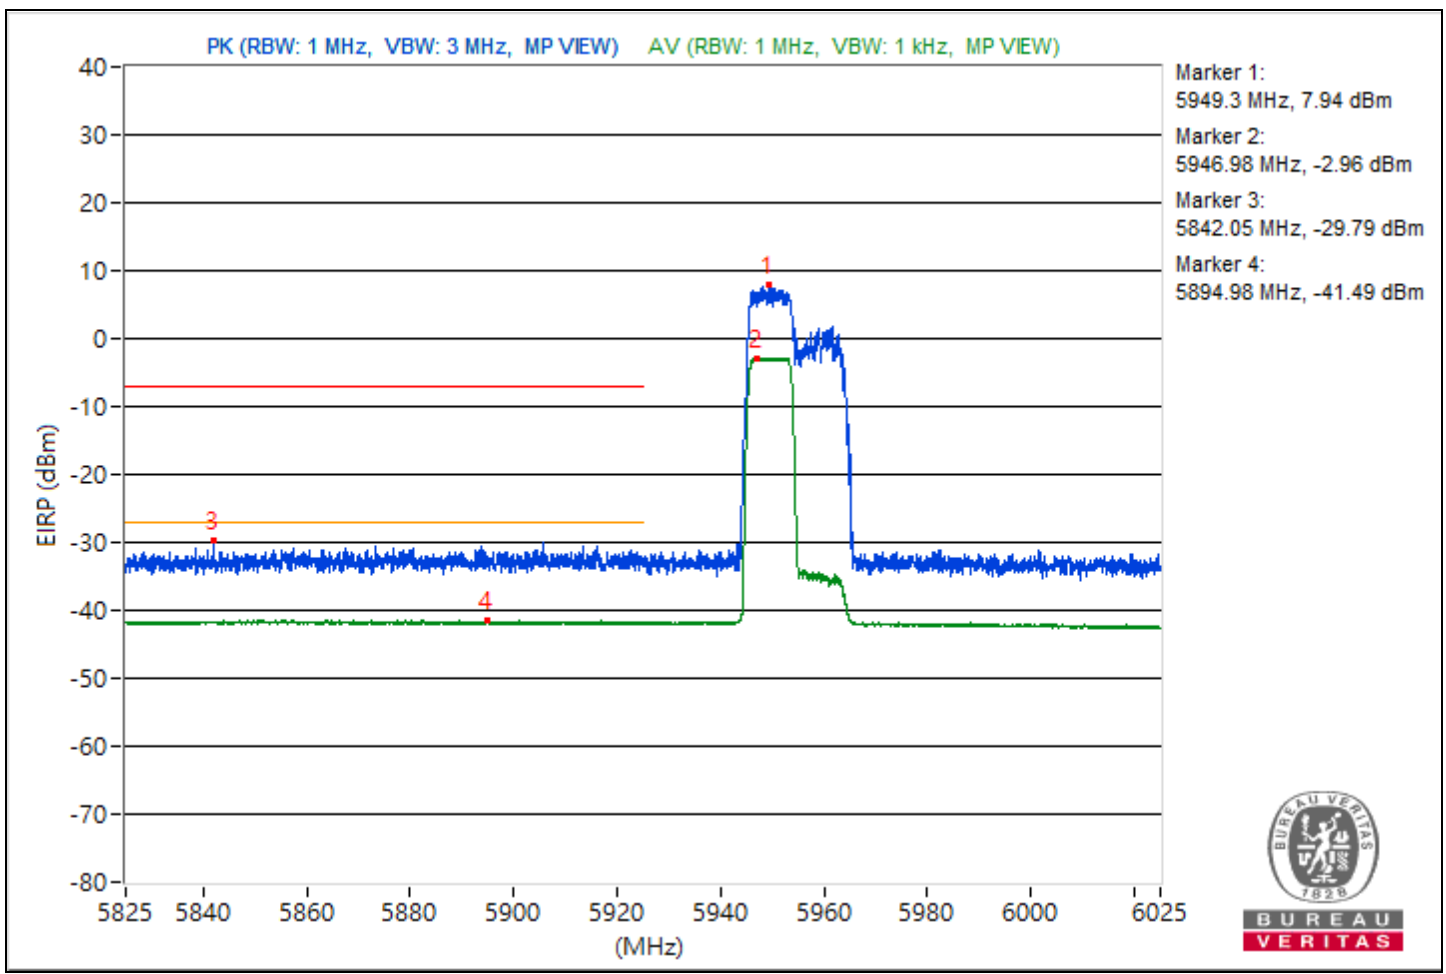


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng



No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	62.41 PK	88.2	-25.79	-36.94	-37.06	4.09	-32.85
2	#7125	48.61 AV	68.2	-19.59	-50.74	-50.76	4.09	-46.65

- Notes:
1. Margin value = Emission Level - Limit value
 2. "#": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

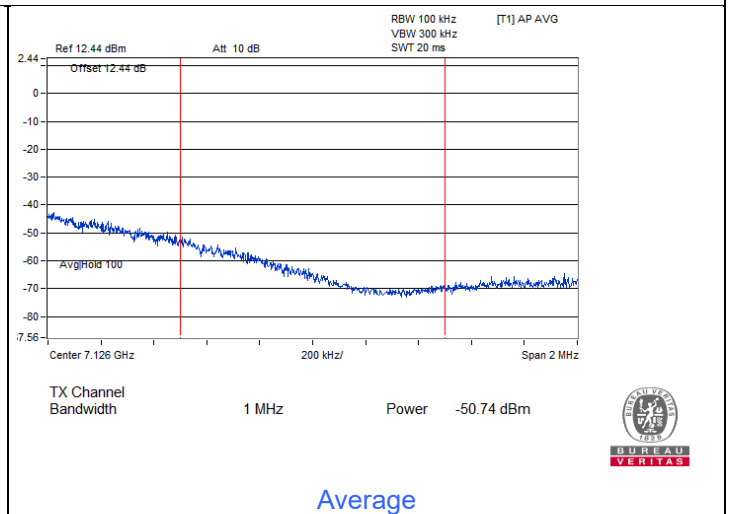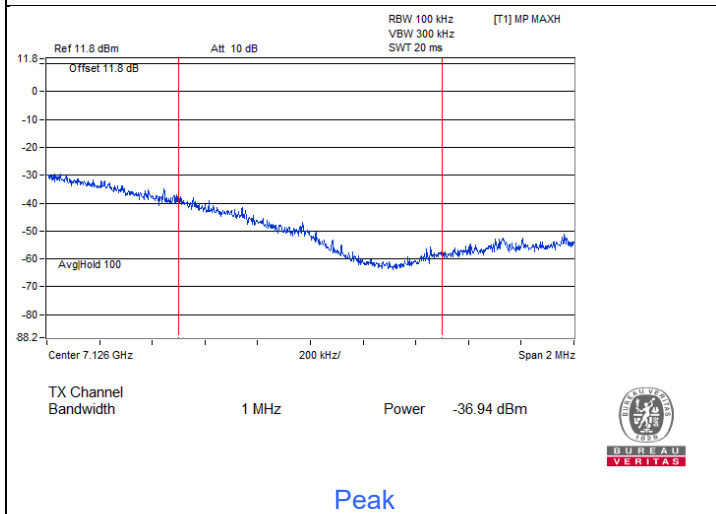

Chain 1

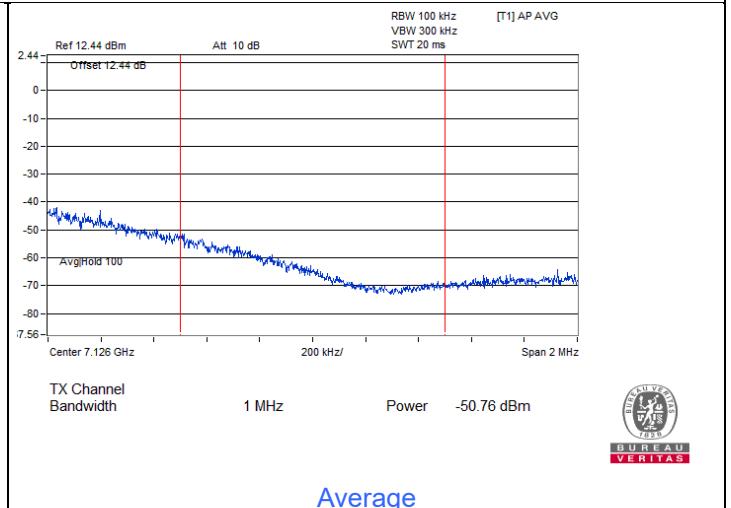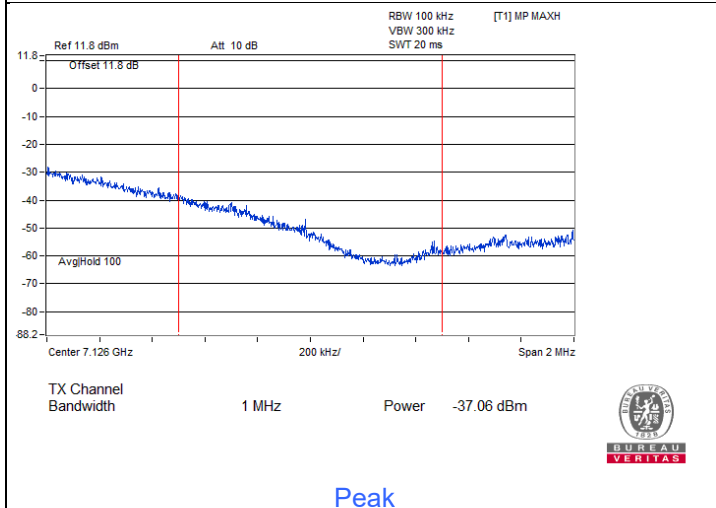


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.93	102.8 PK			-2.78	1.37	4.76	7.54
2	*5948.98	92.16 AV			-11.04	-10.71	4.76	-3.1
3	#5924.68	64.88 PK	88.26	-23.38	-40.78	-36.52	4.76	-30.38
4	#5852.77	53.76 AV	68.26	-14.5	-49.43	-49.11	4.76	-41.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

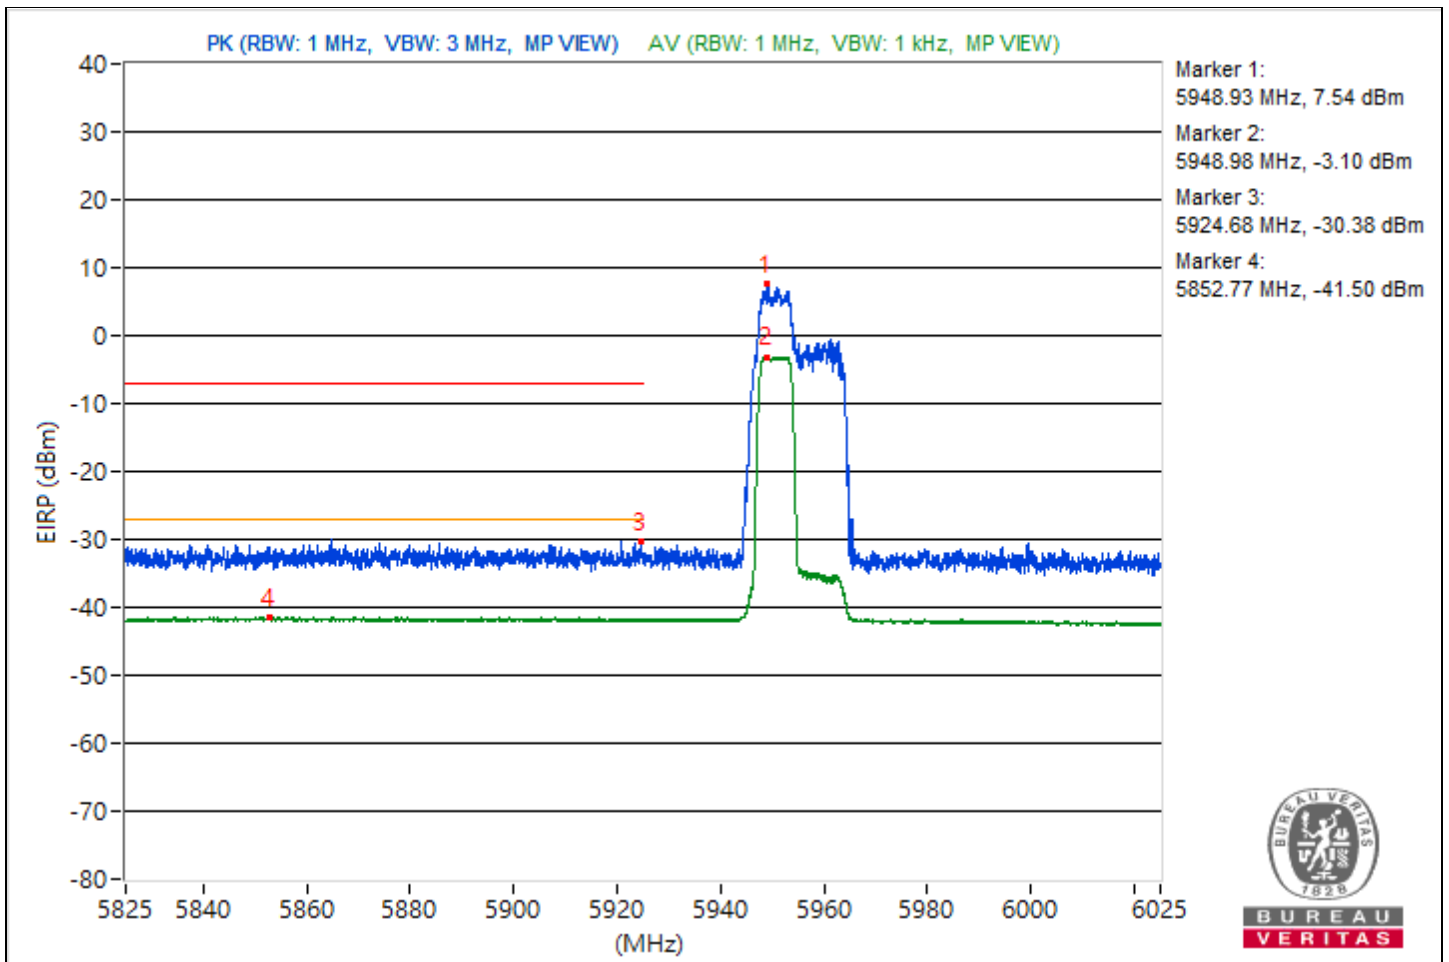


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7121.6	102.22 PK			-0.8	0.44	4.09	6.96
2	*7117.43	92.46 AV			-9.74	-10.07	4.09	-2.8
3	#7125.02	75.75 PK	88.26	-12.51	-26.34	-26.9	4.09	-19.51
4	#7125	45.11 AV	68.26	-23.15	-57.25	-57.26	4.09	-50.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

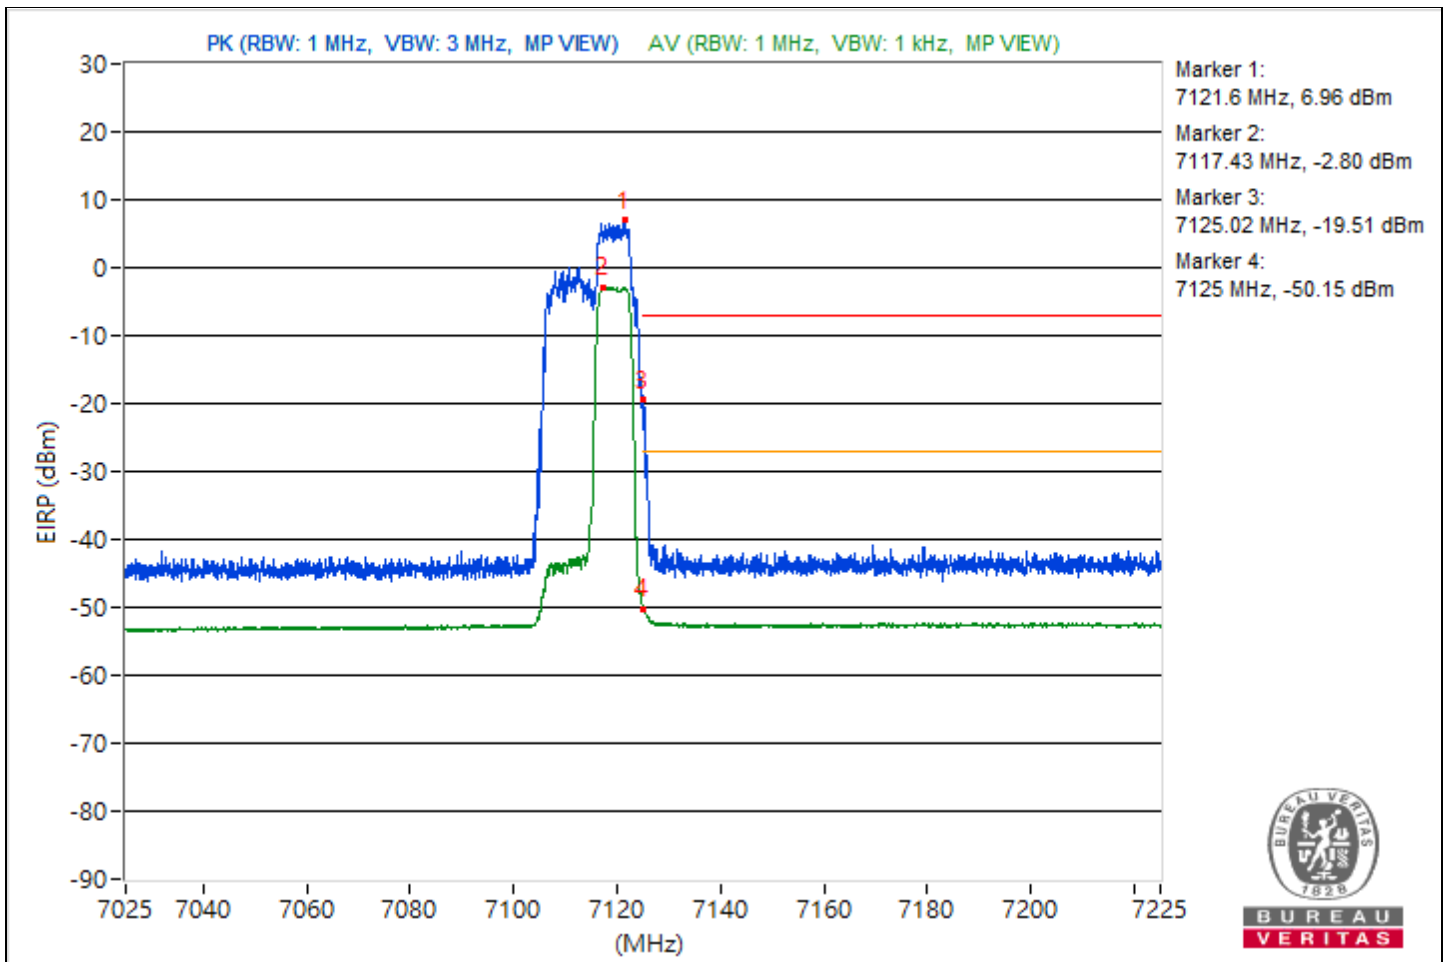


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.23	102.73 PK			0.69	-1.6	4.76	7.47
2	*5953.65	92.35 AV			-10.78	-10.59	4.76	-2.91
3	#5887.55	64.78 PK	88.26	-23.48	-40.49	-36.78	4.76	-30.48
4	#5897.32	53.68 AV	68.26	-14.58	-49.7	-49.02	4.76	-41.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.


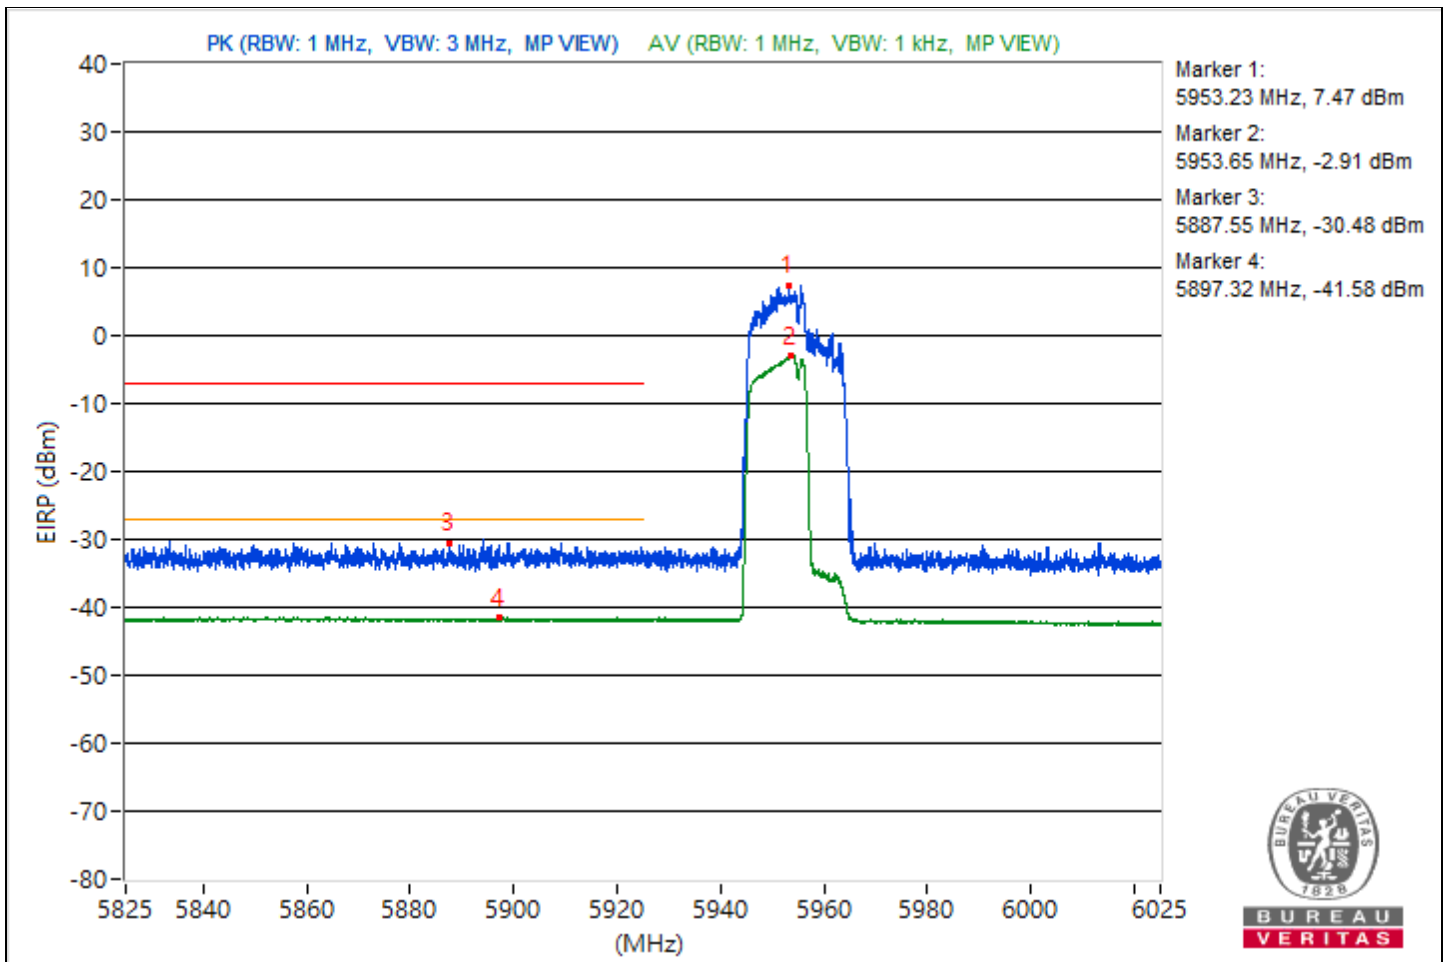


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 60% RH	Tested By	John Peng



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	54.54 PK	88.2	-33.66	-44.81	-44.86	4.09	-40.72
2	#7125	41.71 AV	68.2	-26.49	-57.72	-57.64	4.09	-53.55

- Notes:
1. Margin value = Emission Level - Limit value
 2. "#": The radiated frequency is out of the restricted band.
 3. Follow ANSI C63.10 section 12.7.4.4.3 Integration method.

Chain 0

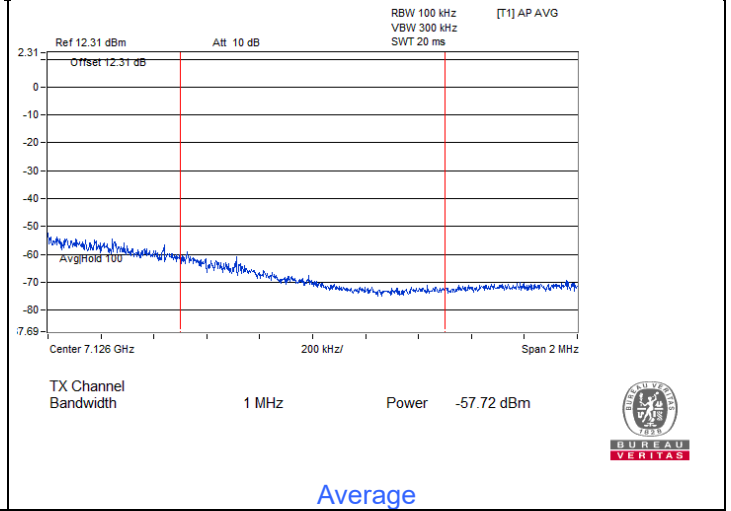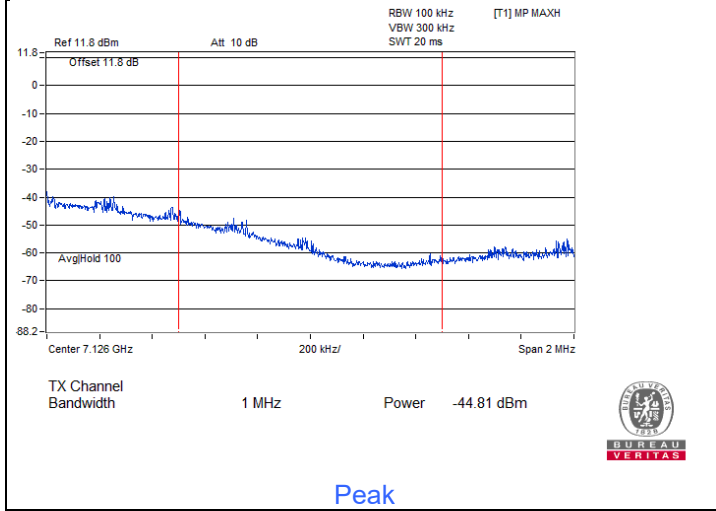

Chain 1

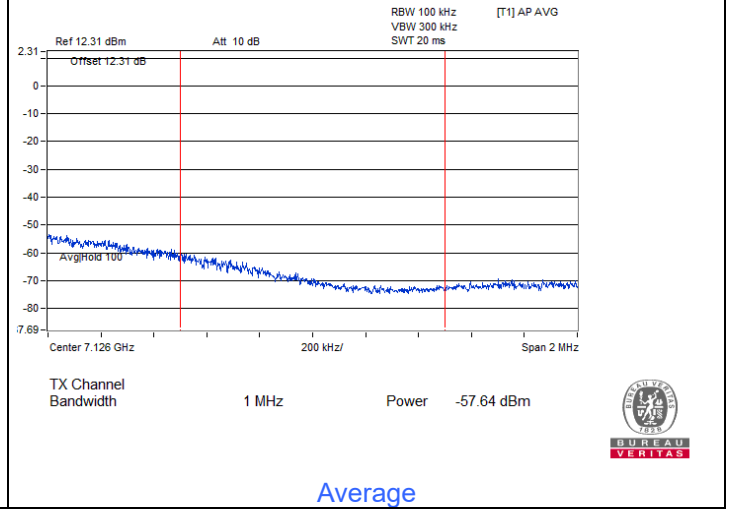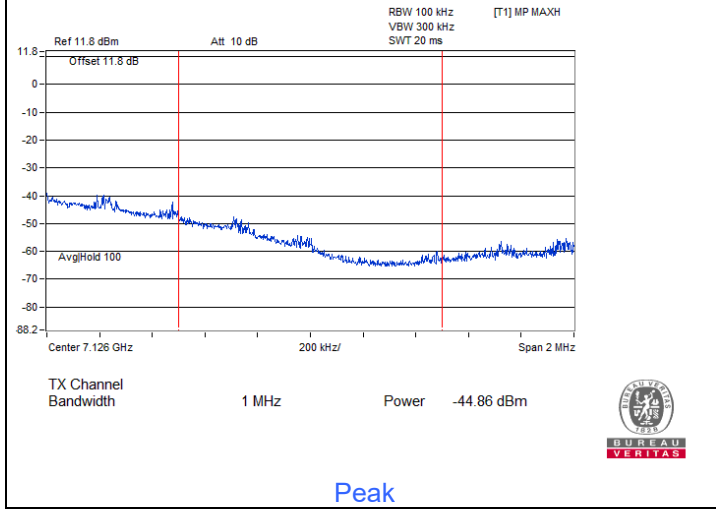


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.73	110.25 PK			10.11	-5.35	4.76	14.99
2	*5953.68	97.75 AV			-2.5	-15.16	4.76	2.49
3	#5890.57	64.23 PK	88.26	-24.03	-37.2	-41.35	4.76	-31.03
4	#5883.23	53.81 AV	68.26	-14.45	-48.88	-49.6	4.76	-41.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

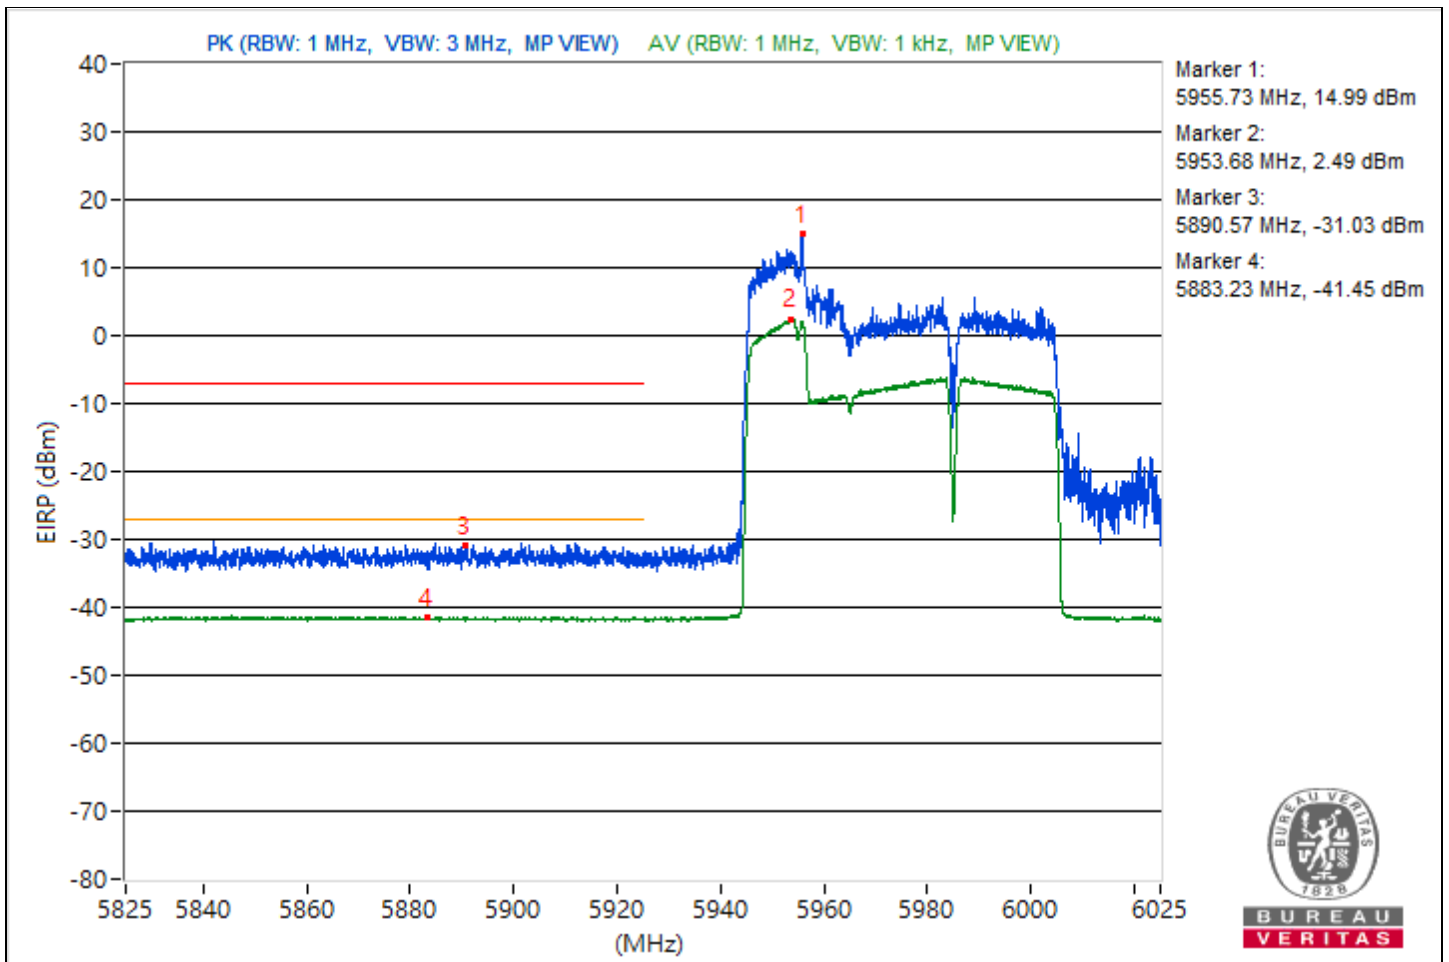


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7031.27	102.12 PK			-2.1	1.06	4.09	6.86
2	*7027.65	92.28 AV			-9.79	-10.38	4.09	-2.98
3	#7202.45	54.13 PK	88.26	-34.13	-47.11	-49.74	4.09	-41.13
4	#7160.15	43.35 AV	68.26	-24.91	-59.36	-58.69	4.09	-51.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

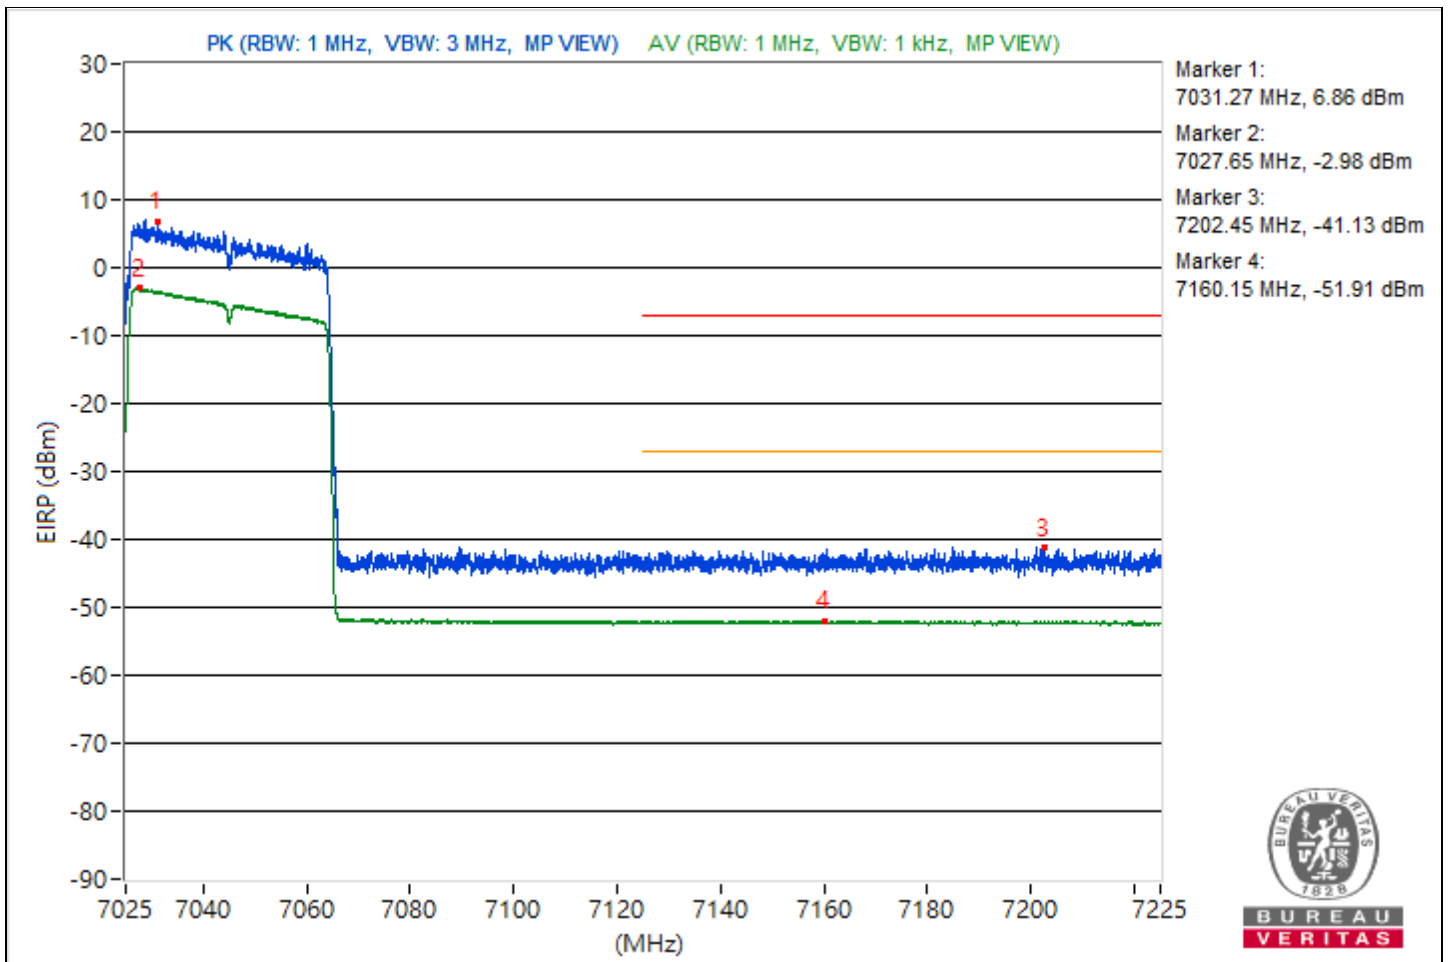


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6016.02	101.37 PK			-7.97	0.8	4.76	6.11
2	*6023.12	90.24 AV			-16.15	-10.92	4.76	-5.02
3	#5865.68	64.91 PK	88.26	-23.35	-41.94	-36.12	4.76	-30.35
4	#5902.93	54.14 AV	68.26	-14.12	-49.45	-48.41	4.76	-41.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # " : The radiated frequency is out of the restricted band.

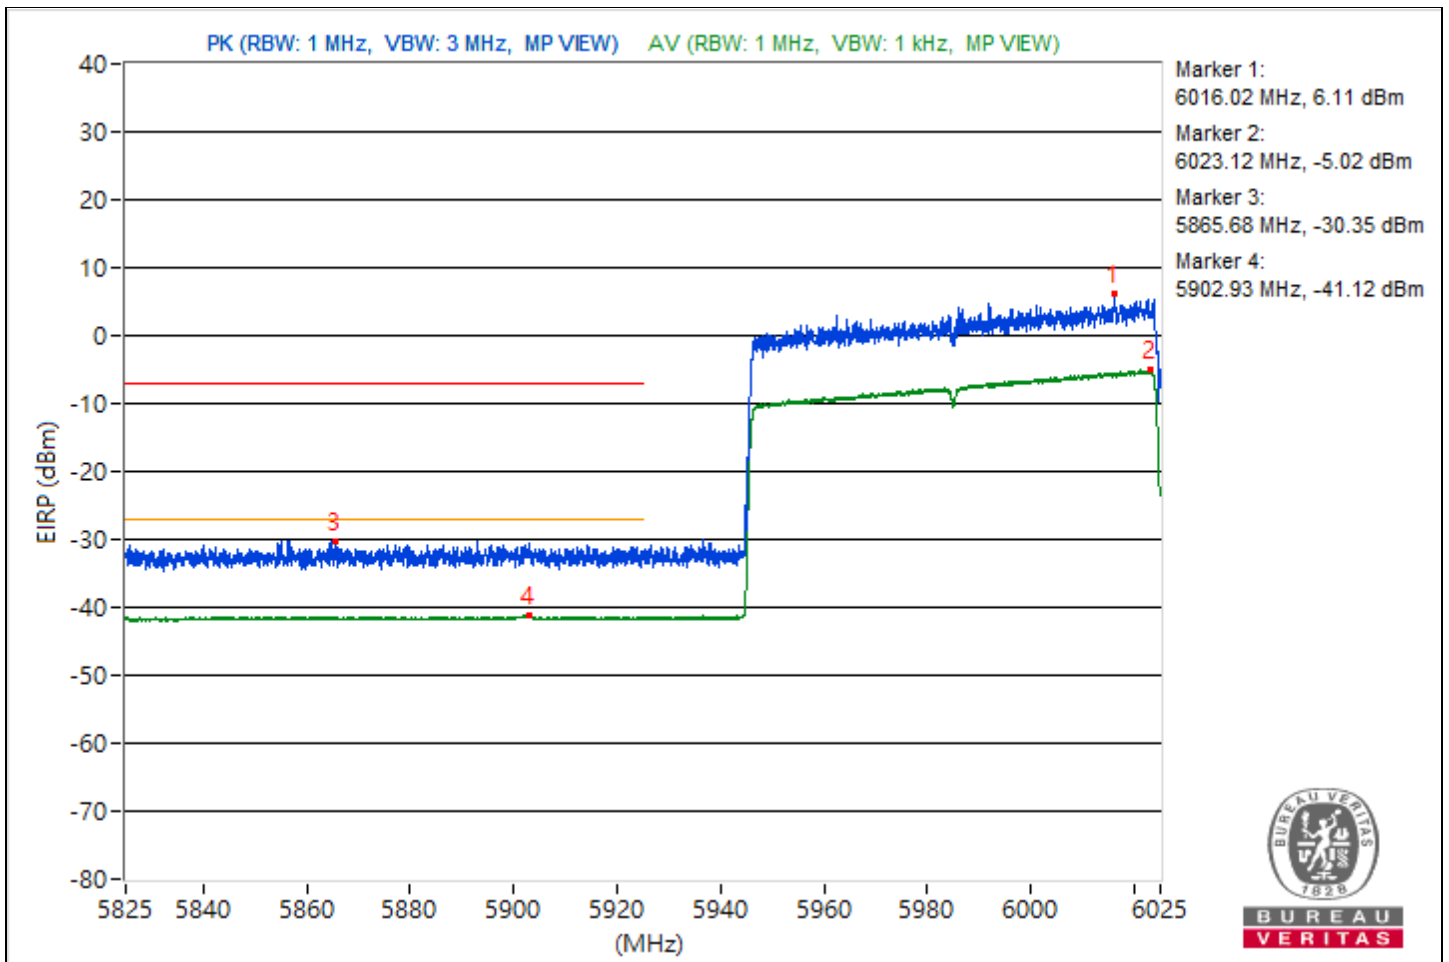


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7030.77	99.87 PK			-2.05	-2.99	4.09	4.61
2	*7027.07	89.3 AV			-13.29	-12.85	4.09	-5.96
3	#7140.05	55.61 PK	88.26	-32.65	-44.94	-49.92	4.09	-39.65
4	#7125.85	45.54 AV	68.26	-22.72	-57.1	-56.55	4.09	-49.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

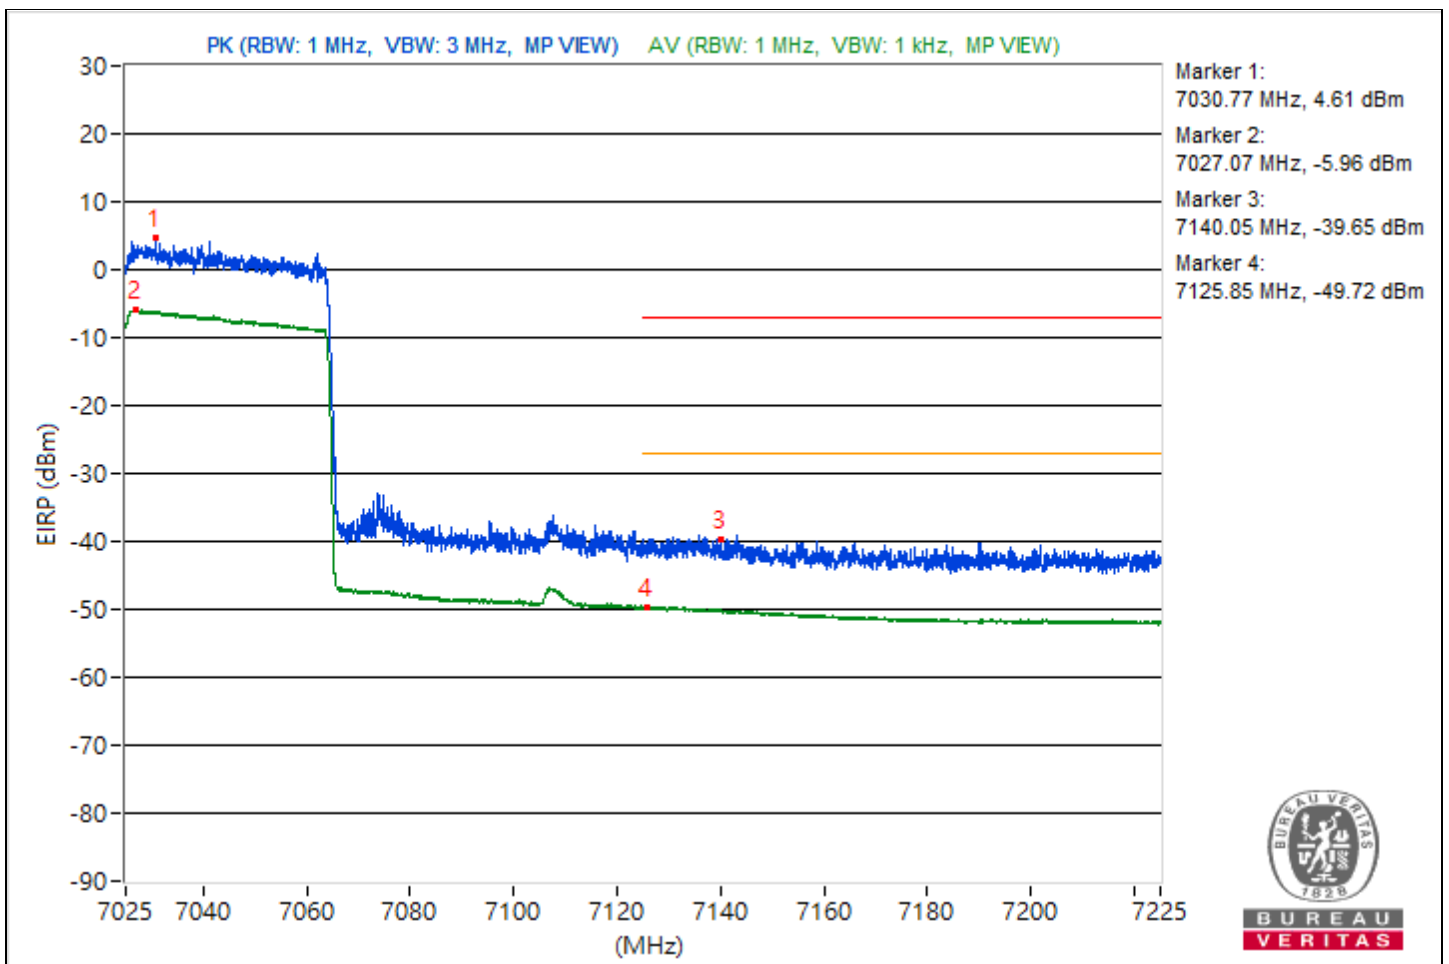


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.6	103.05 PK			-1.84	1.31	4.76	7.79
2	*6023.02	91.94 AV			-11.33	-10.87	4.76	-3.32
3	#5890.65	64.55 PK	88.26	-23.71	-37.02	-40.7	4.76	-30.71
4	#5918.6	54.21 AV	68.26	-14.05	-48.61	-49.05	4.76	-41.05

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

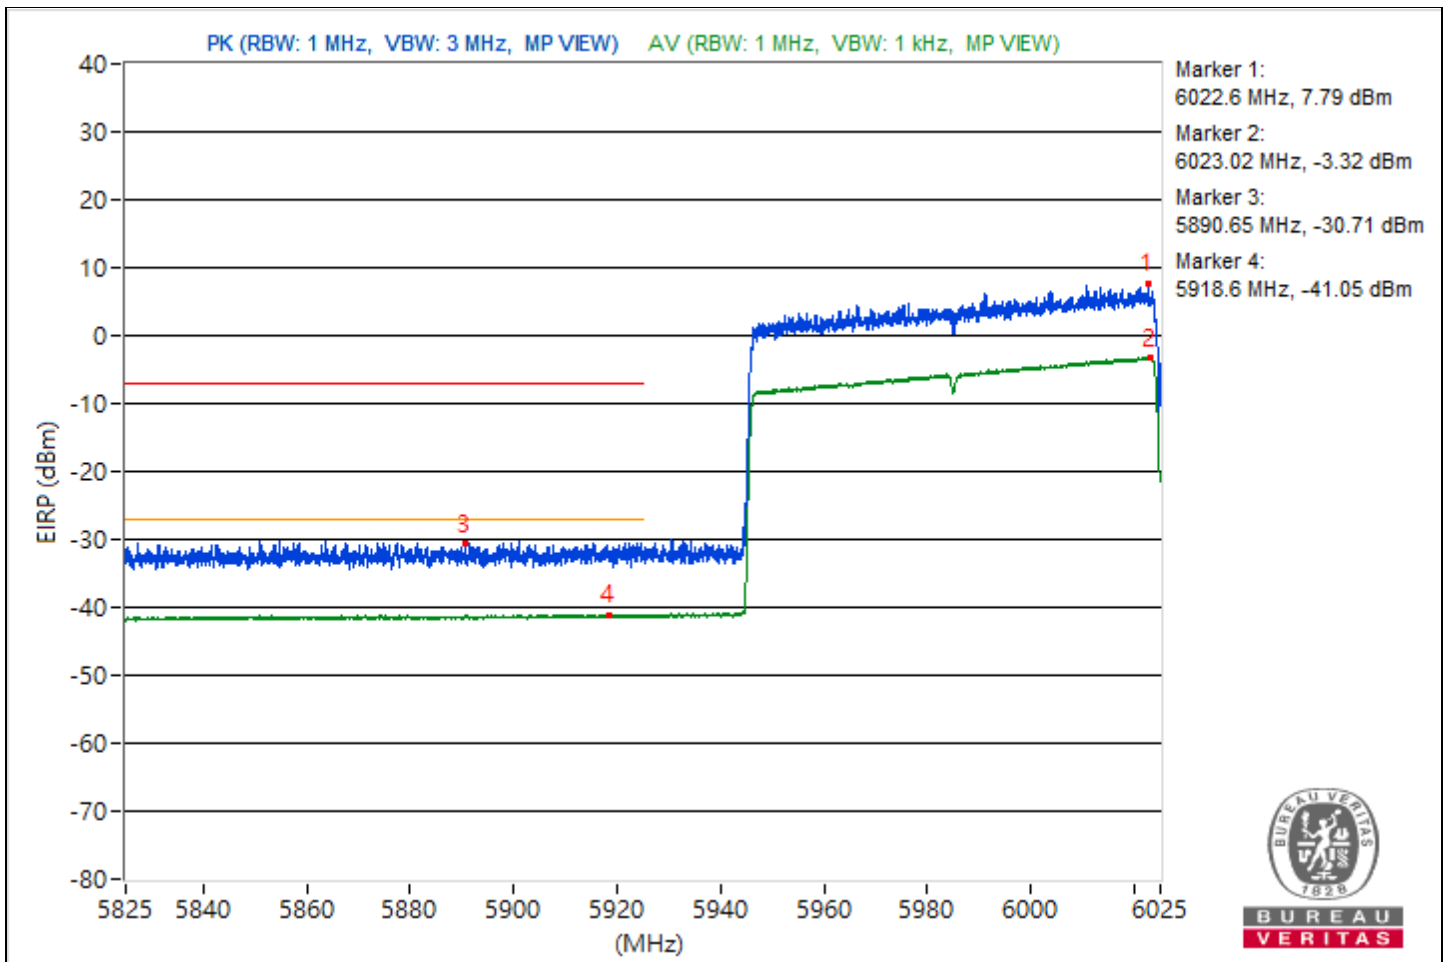


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7025.37	99.81 PK			-1.57	-3.83	4.09	4.55
2	*7027	89.37 AV			-12.88	-13.11	4.09	-5.89
3	#7129.93	59.32 PK	88.26	-28.94	-41.18	-46.36	4.09	-35.94
4	#7133.87	47.06 AV	68.26	-21.2	-55.28	-55.33	4.09	-48.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

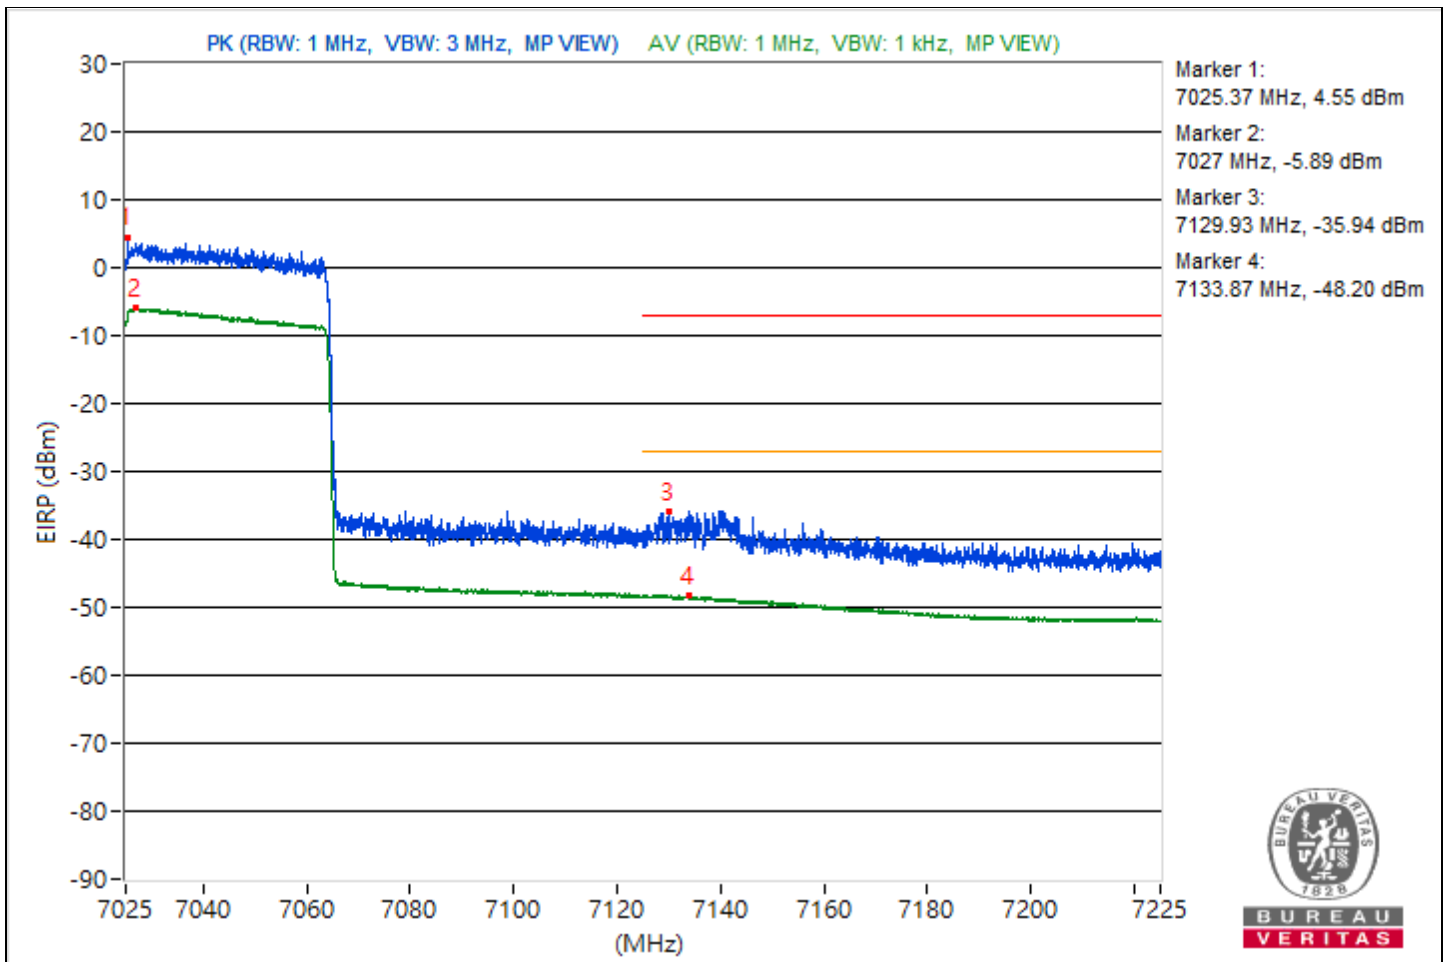



under control of a Standard Power AP


For 1TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.11	55.62 PK	74	-18.38	-44.56	4.92	-39.64
2	3781.88	42.98 AV	54	-11.02	-57.2	4.92	-52.28
3	11909.6	54.5 PK	74	-19.5	-45.68	4.92	-40.76
4	11909.42	43.78 AV	54	-10.22	-56.4	4.92	-51.48
5	21105.7	55.92 PK	74	-18.08	-44.26	4.92	-39.34
6	21101.6	43.9 AV	54	-10.1	-56.28	4.92	-51.36
7	23709.4	56.77 PK	74	-17.23	-43.41	4.92	-38.49
8	22217.5	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	38901.33	49.8 PK	74	-24.2	-50.38	4.92	-45.46
10	38727.38	38.46 AV	54	-15.54	-61.72	4.92	-56.8

Note: Margin value = Emission Level - Limit value

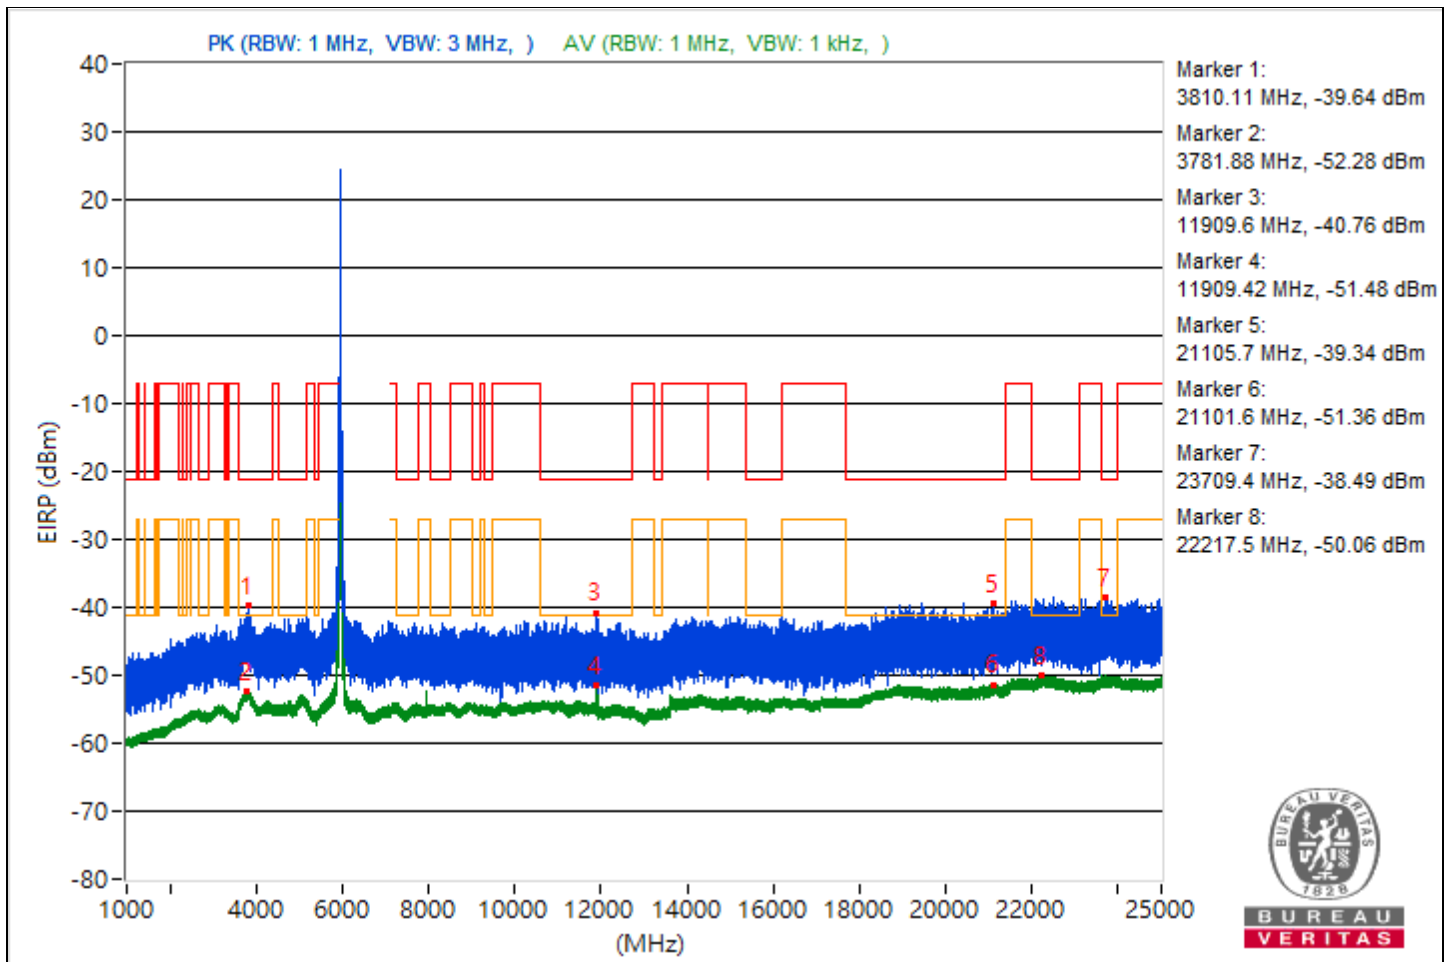

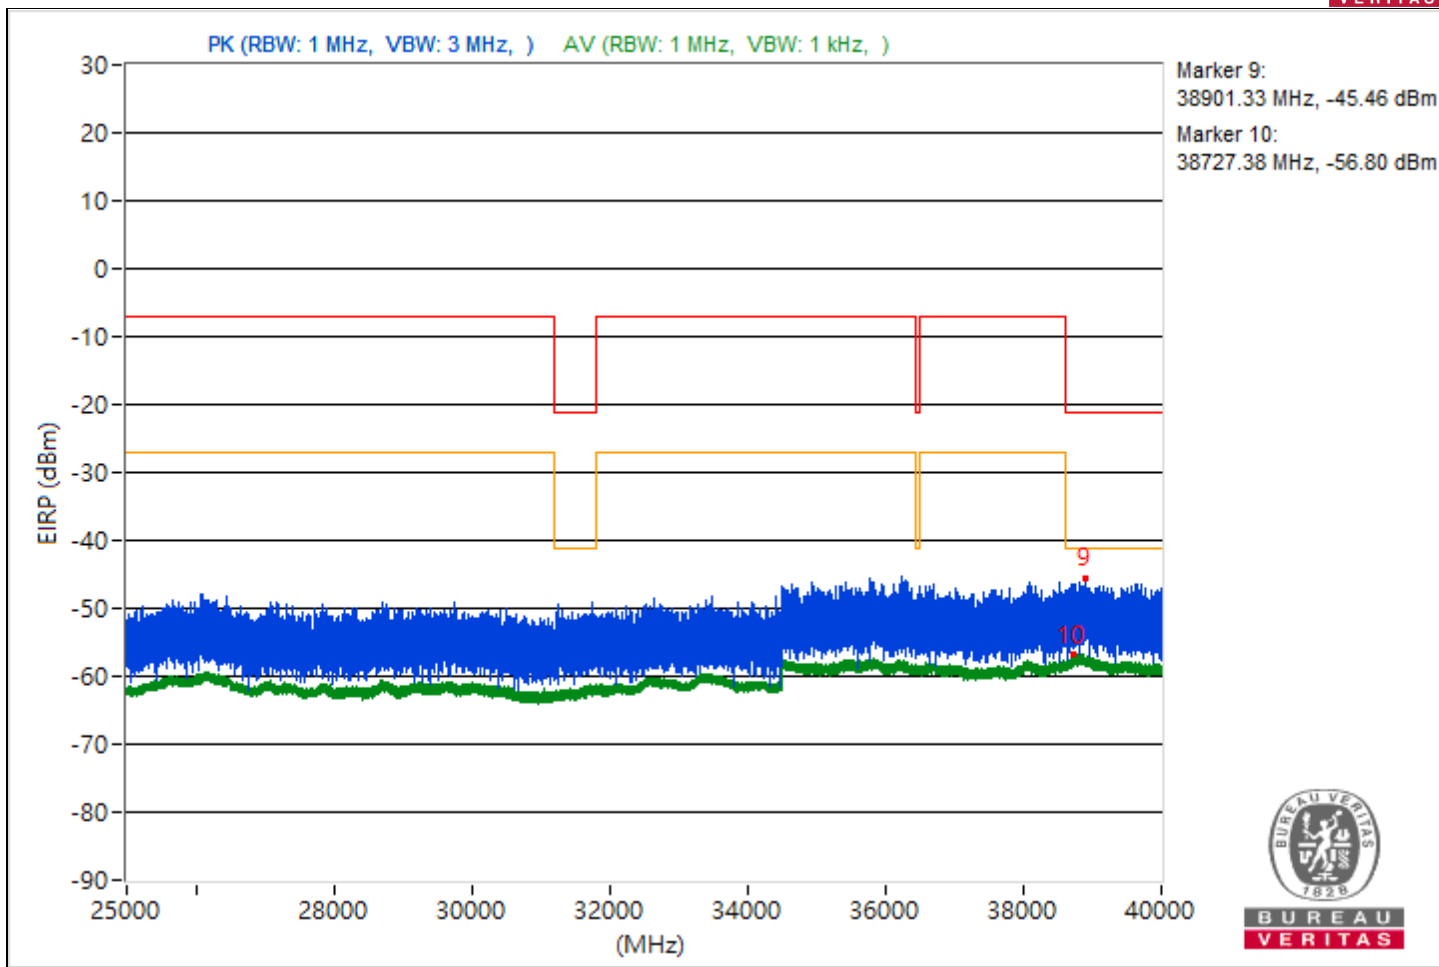





RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.46	54.39 PK	74	-19.61	-45.79	4.92	-40.87
2	3828.93	42.95 AV	54	-11.05	-57.23	4.92	-52.31
3	14483.11	54 PK	74	-20	-46.18	4.92	-41.26
4	12368.18	42.88 AV	54	-11.12	-57.3	4.92	-52.38
5	20892.5	55.7 PK	74	-18.3	-44.48	4.92	-39.56
6	21396.7	43.81 AV	54	-10.19	-56.37	4.92	-51.45
7	22132.1	57.53 PK	74	-16.47	-42.65	4.92	-37.73
8	23773.2	45.26 AV	54	-8.74	-54.92	4.92	-50
9	38853.96	49.55 PK	74	-24.45	-50.63	4.92	-45.71
10	38836.8	38.4 AV	54	-15.6	-61.78	4.92	-56.86

Note: Margin value = Emission Level - Limit value

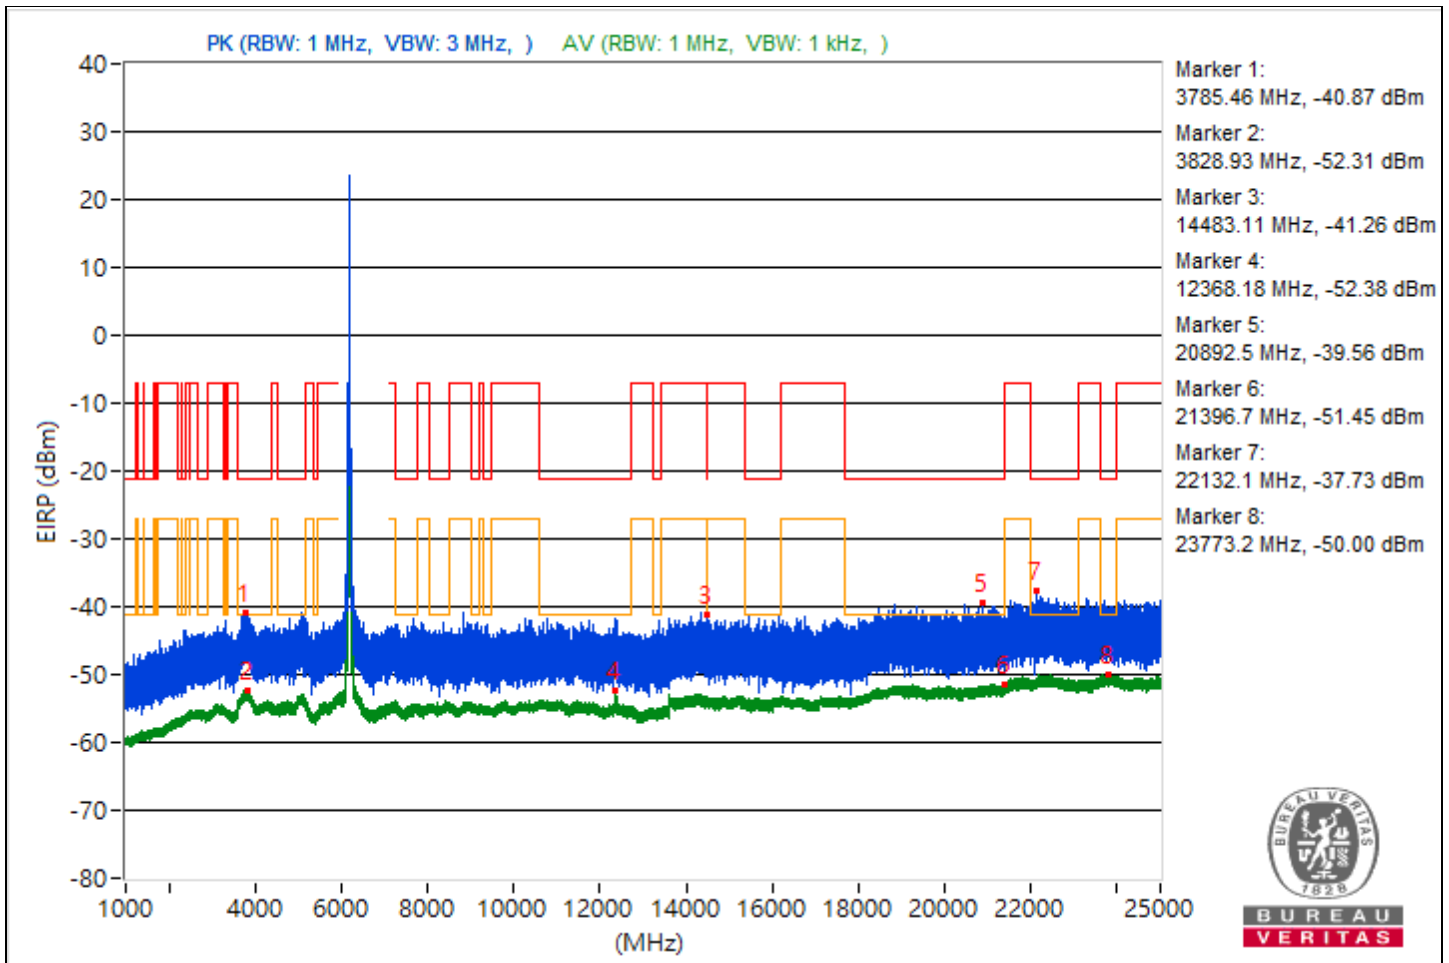

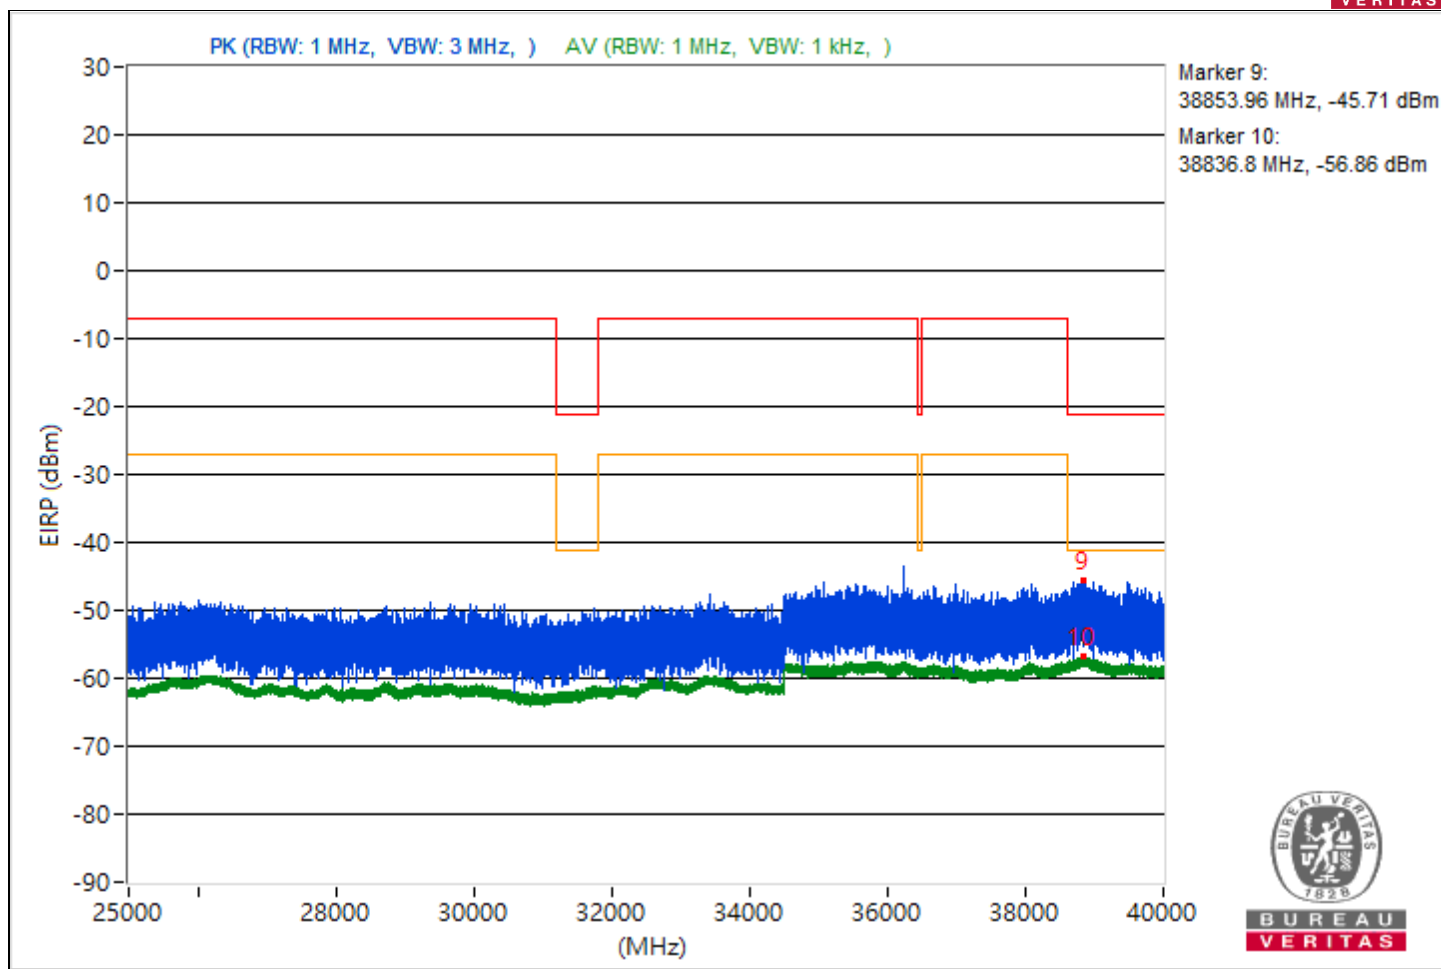





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.6	56.08 PK	74	-17.92	-44.1	4.92	-39.18
2	3812.29	42.87 AV	54	-11.13	-57.31	4.92	-52.39
3	15876.36	53.68 PK	74	-20.32	-46.5	4.92	-41.58
4	14481.07	41.97 AV	54	-12.03	-58.21	4.92	-53.29
5	21195.8	55.65 PK	74	-18.35	-44.53	4.92	-39.61
6	21102.1	43.81 AV	54	-10.19	-56.37	4.92	-51.45
7	23621.7	56.74 PK	74	-17.26	-43.44	4.92	-38.52
8	22237.9	45.18 AV	54	-8.82	-55	4.92	-50.08
9	38780.27	49.79 PK	74	-24.21	-50.39	4.92	-45.47
10	38817.6	38.4 AV	54	-15.6	-61.78	4.92	-56.86

Note: Margin value = Emission Level - Limit value

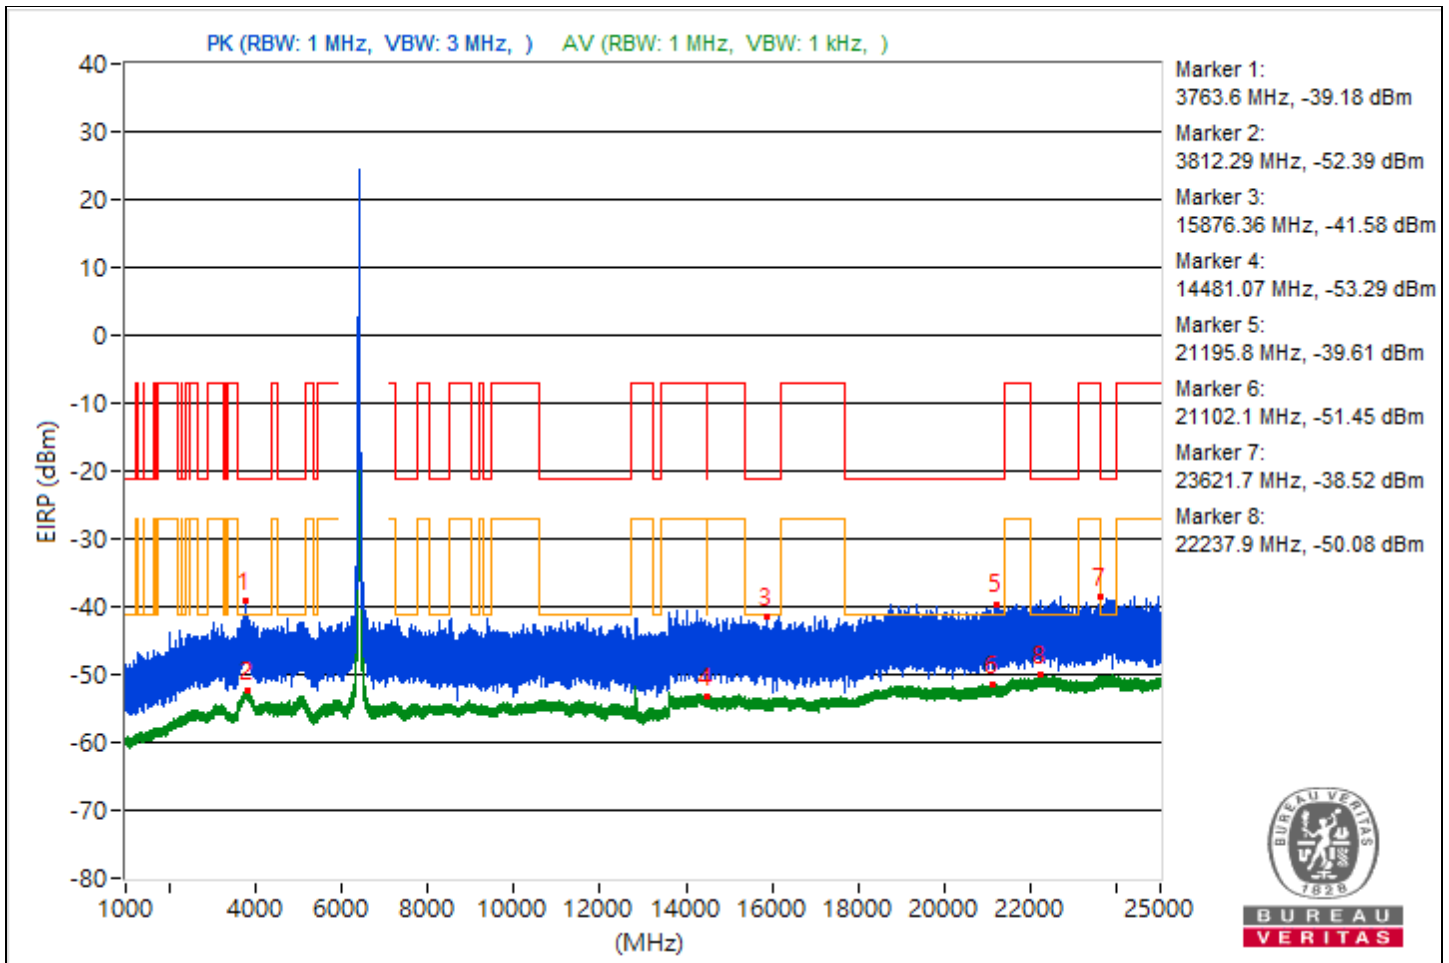

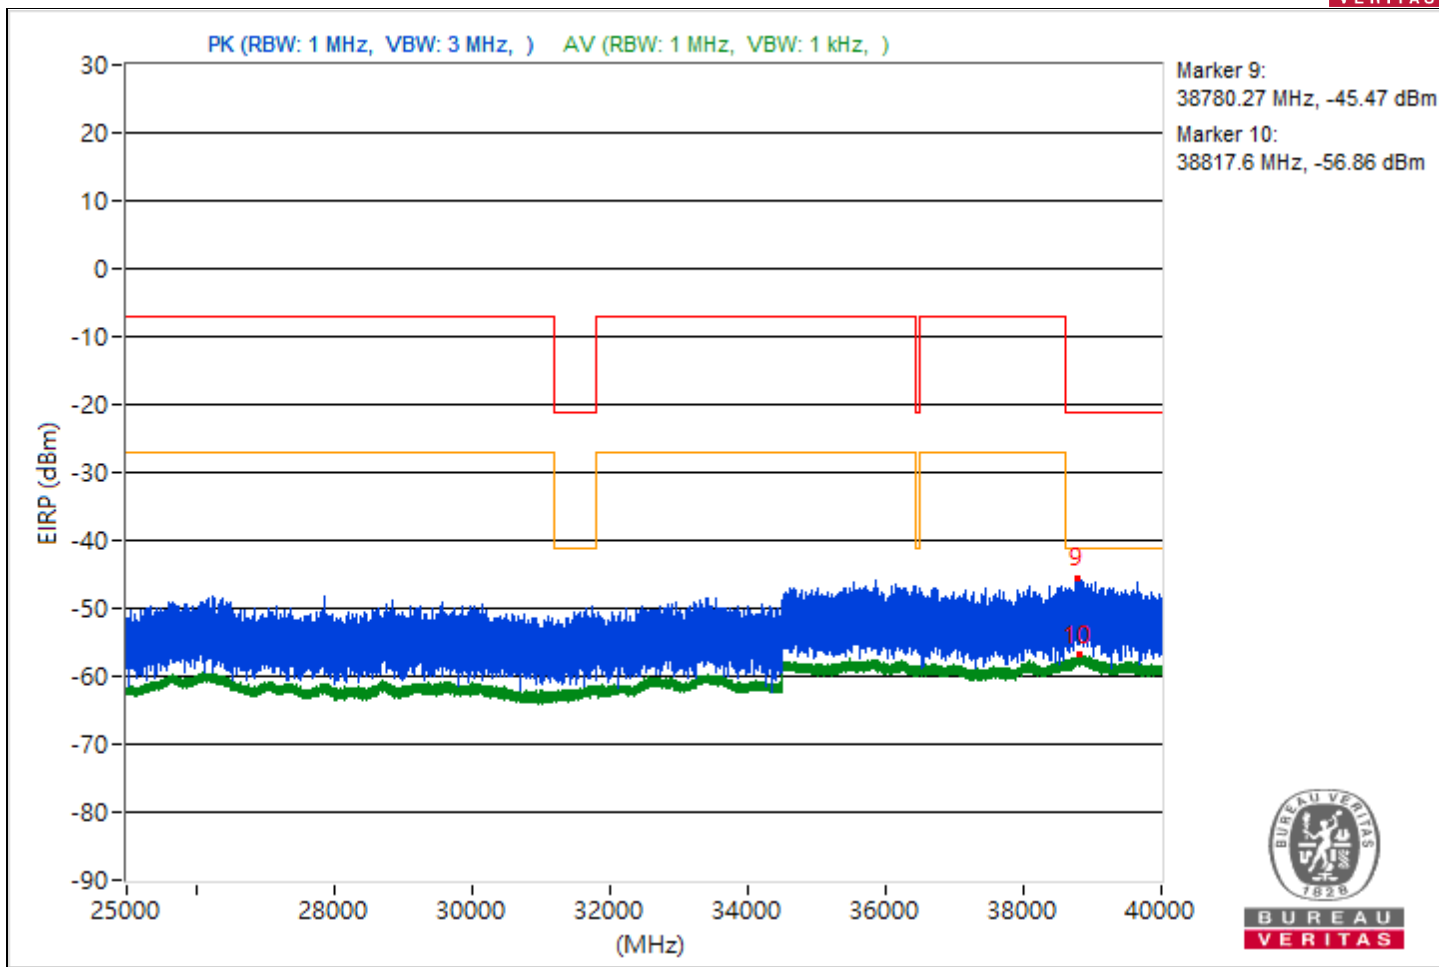





RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.24	54.31 PK	74	-19.69	-45.87	4.92	-40.95
2	3800.78	42.93 AV	54	-11.07	-57.25	4.92	-52.33
3	15568.98	53.75 PK	74	-20.25	-46.43	4.92	-41.51
4	14499.11	41.85 AV	54	-12.15	-58.33	4.92	-53.41
5	19885.6	55.69 PK	74	-18.31	-44.49	4.92	-39.57
6	21057.1	43.79 AV	54	-10.21	-56.39	4.92	-51.47
7	23813.4	56.89 PK	74	-17.11	-43.29	4.92	-38.37
8	23788.4	45.23 AV	54	-8.77	-54.95	4.92	-50.03
9	38687.64	50.02 PK	74	-23.98	-50.16	4.92	-45.24
10	38846.58	38.58 AV	54	-15.42	-61.6	4.92	-56.68

Note: Margin value = Emission Level - Limit value

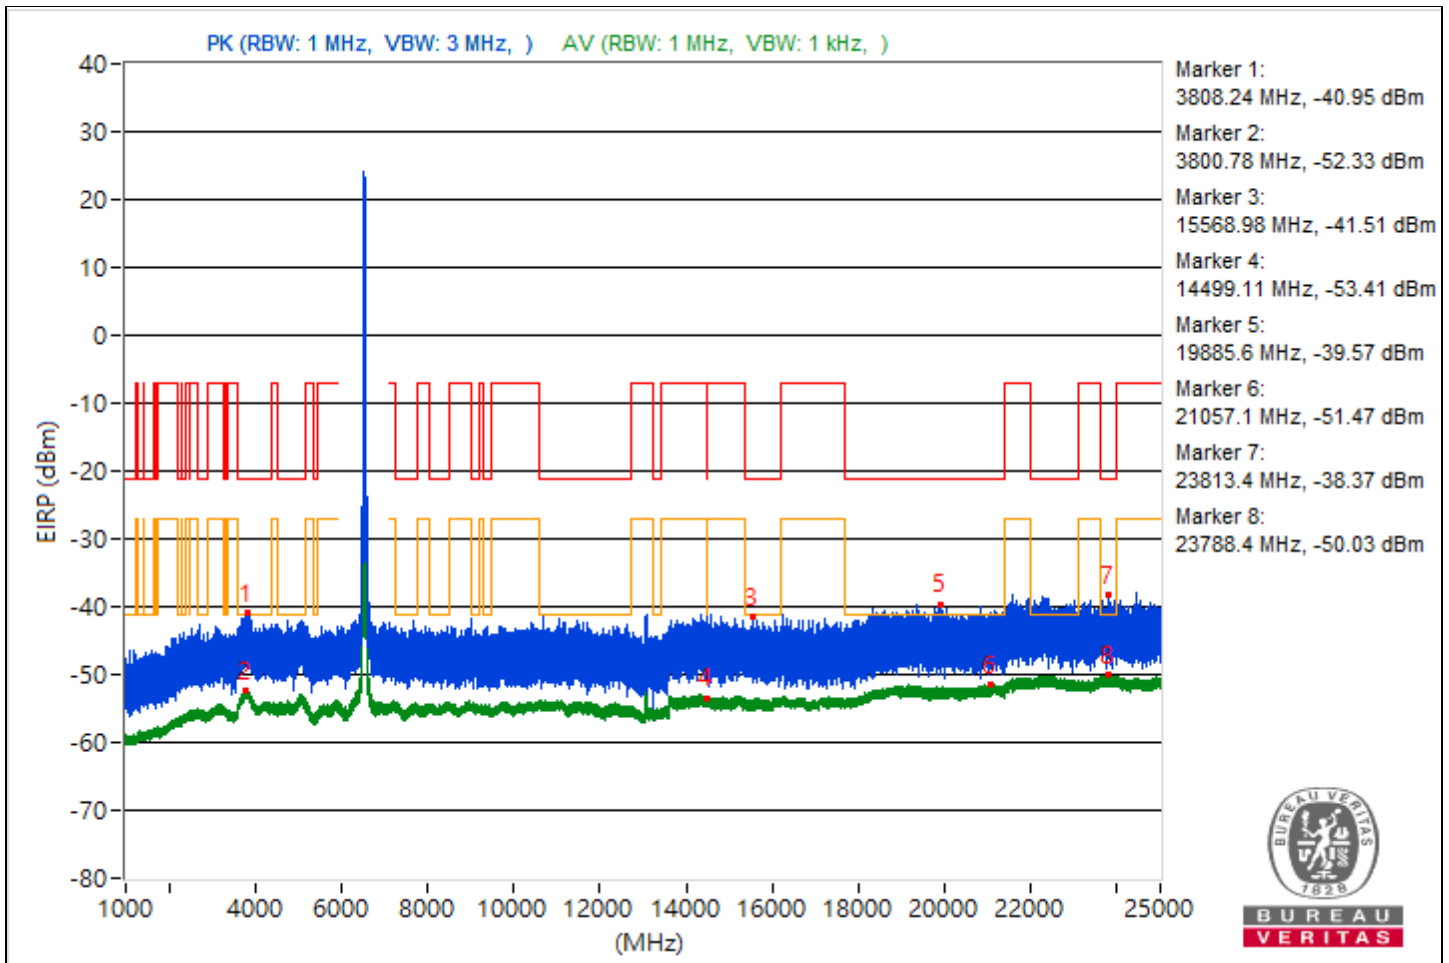

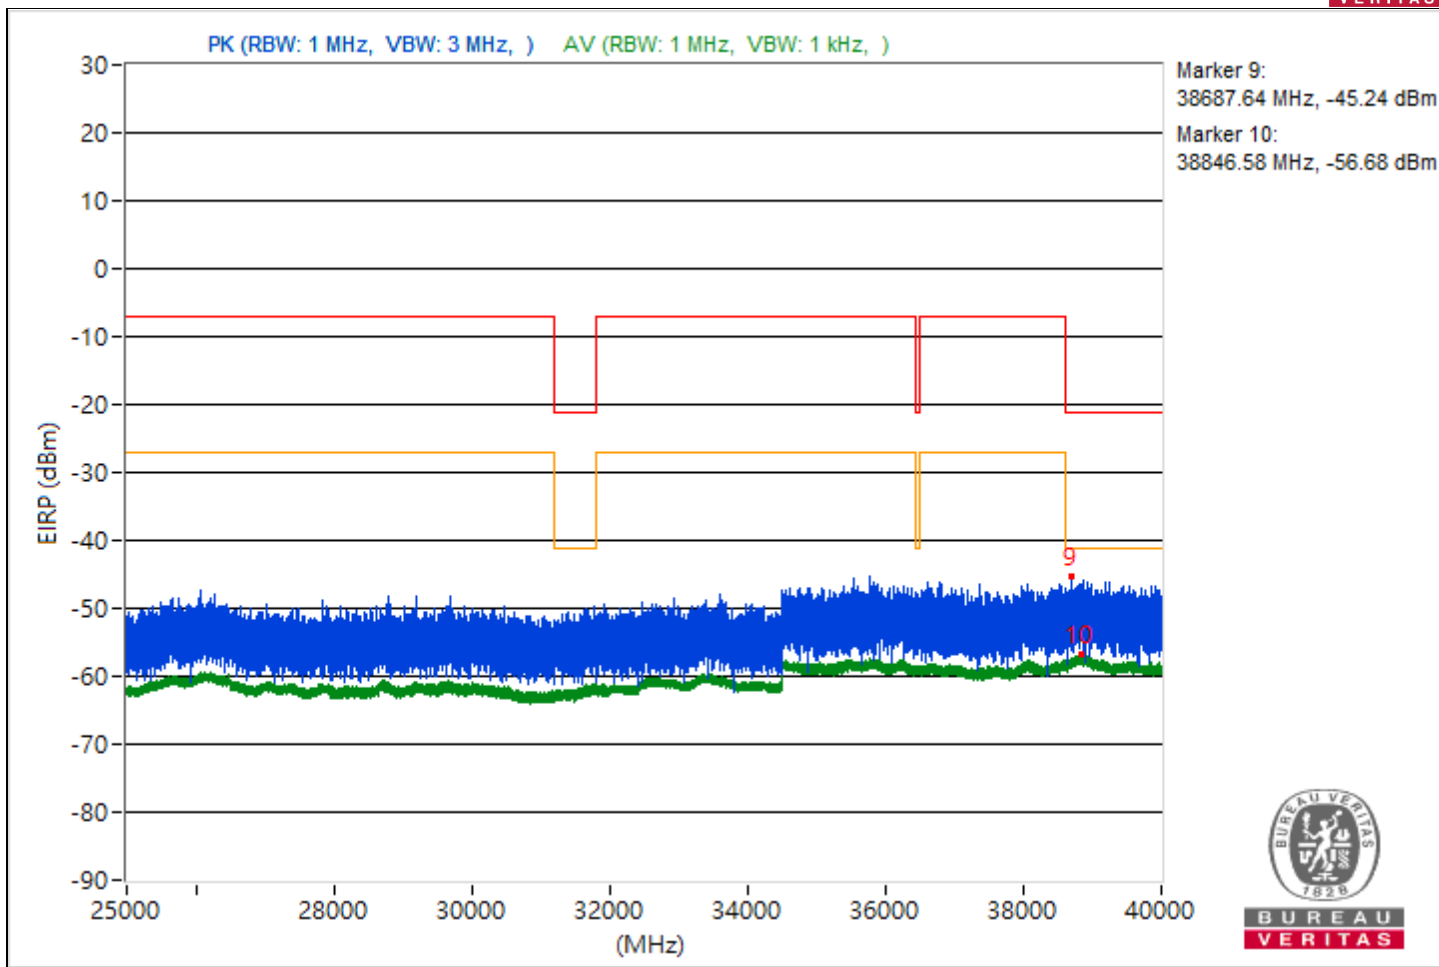





RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.01	54.52 PK	74	-19.48	-45.66	4.92	-40.74
2	3818.04	42.91 AV	54	-11.09	-57.27	4.92	-52.35
3	13389.87	53.95 PK	74	-20.05	-46.23	4.92	-41.31
4	13390.04	44.79 AV	54	-9.21	-55.39	4.92	-50.47
5	20851.3	56.85 PK	74	-17.15	-43.33	4.92	-38.41
6	21391.2	43.9 AV	54	-10.1	-56.28	4.92	-51.36
7	22260.3	57.48 PK	74	-16.52	-42.7	4.92	-37.78
8	22241.5	45.15 AV	54	-8.85	-55.03	4.92	-50.11
9	38844.44	50.87 PK	74	-23.13	-49.31	4.92	-44.39
10	38807.64	38.51 AV	54	-15.49	-61.67	4.92	-56.75

Note: Margin value = Emission Level - Limit value

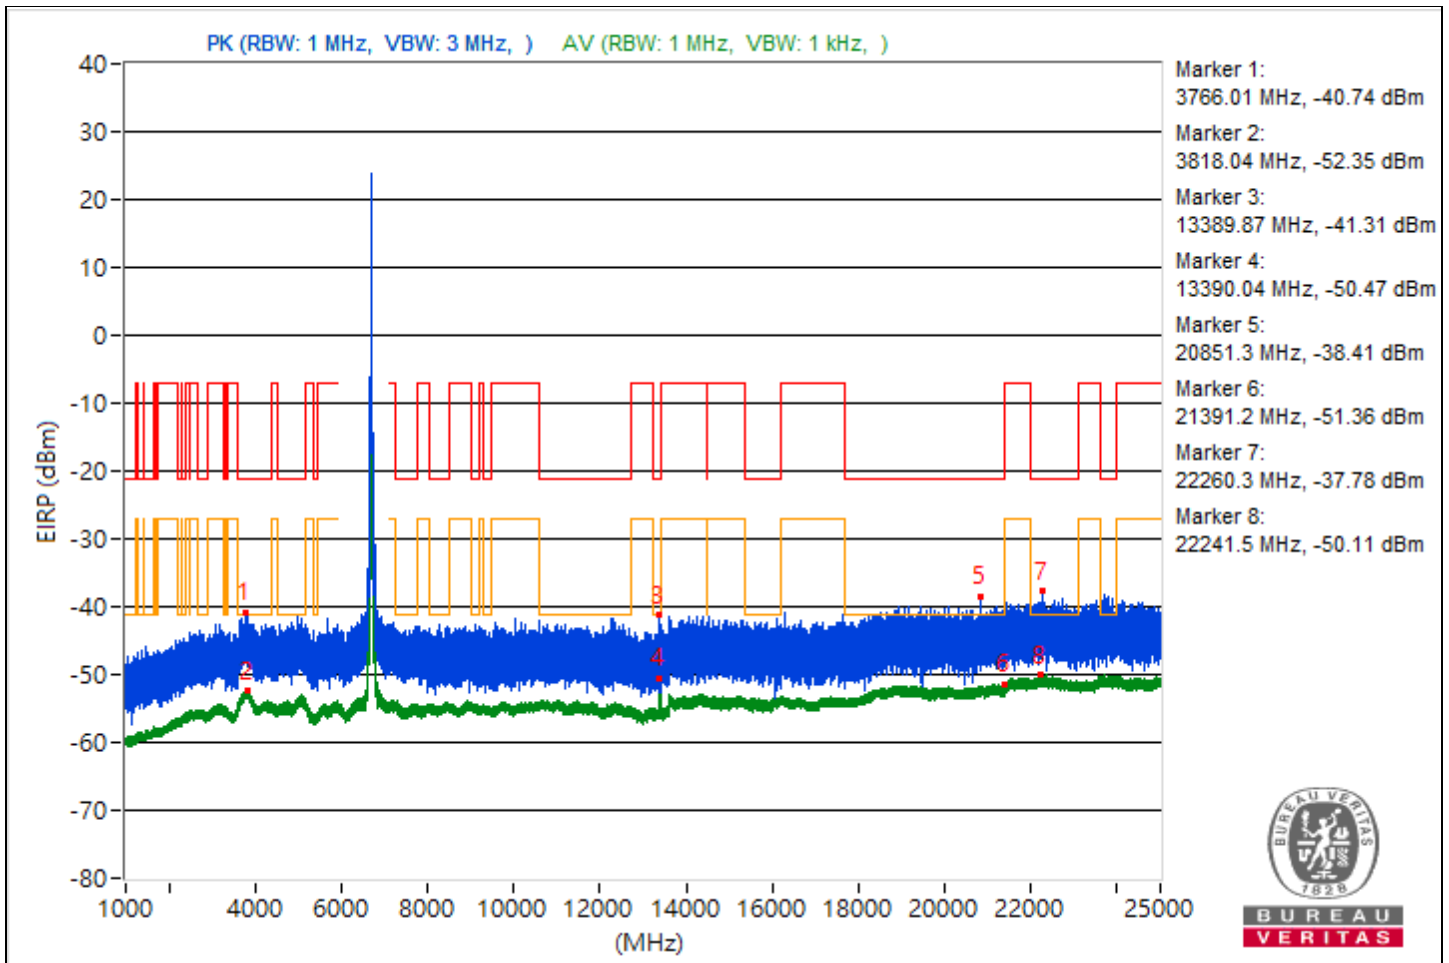

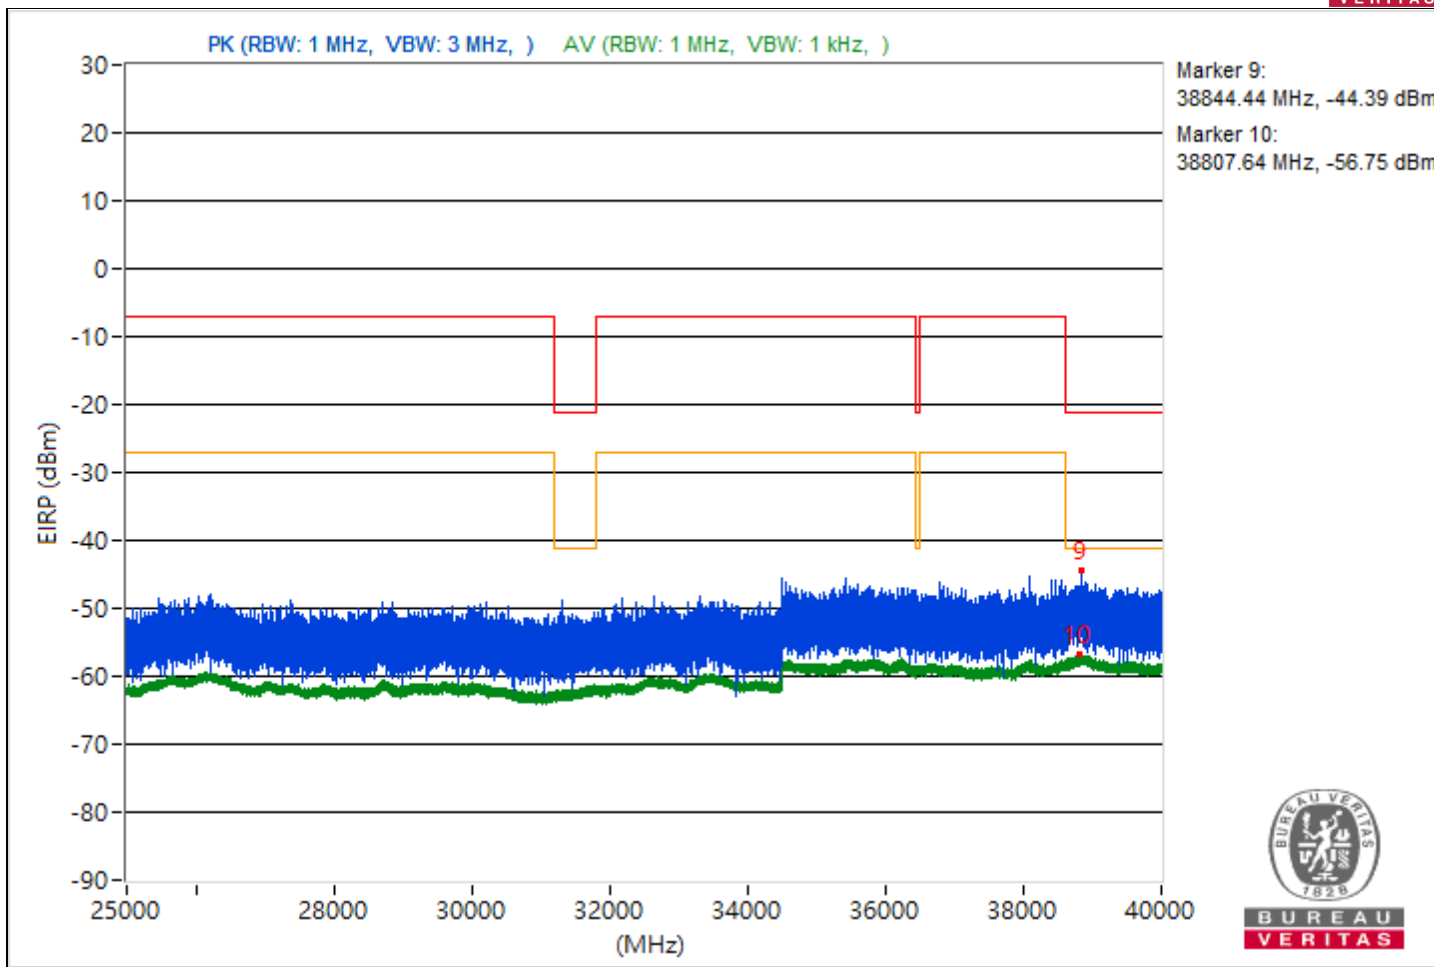





RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.62	54.36 PK	74	-19.64	-45.82	4.92	-40.9
2	3806.84	42.96 AV	54	-11.04	-57.22	4.92	-52.3
3	15546.76	53.93 PK	74	-20.07	-46.25	4.92	-41.33
4	14482.93	41.83 AV	54	-12.17	-58.35	4.92	-53.43
5	20590.9	55.74 PK	74	-18.26	-44.44	4.92	-39.52
6	21048.1	43.76 AV	54	-10.24	-56.42	4.92	-51.5
7	23701.2	57.86 PK	74	-16.14	-42.32	4.92	-37.4
8	23659.4	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	38776.18	50.03 PK	74	-23.97	-50.15	4.92	-45.23
10	38935.11	38.69 AV	54	-15.31	-61.49	4.92	-56.57

Note: Margin value = Emission Level - Limit value

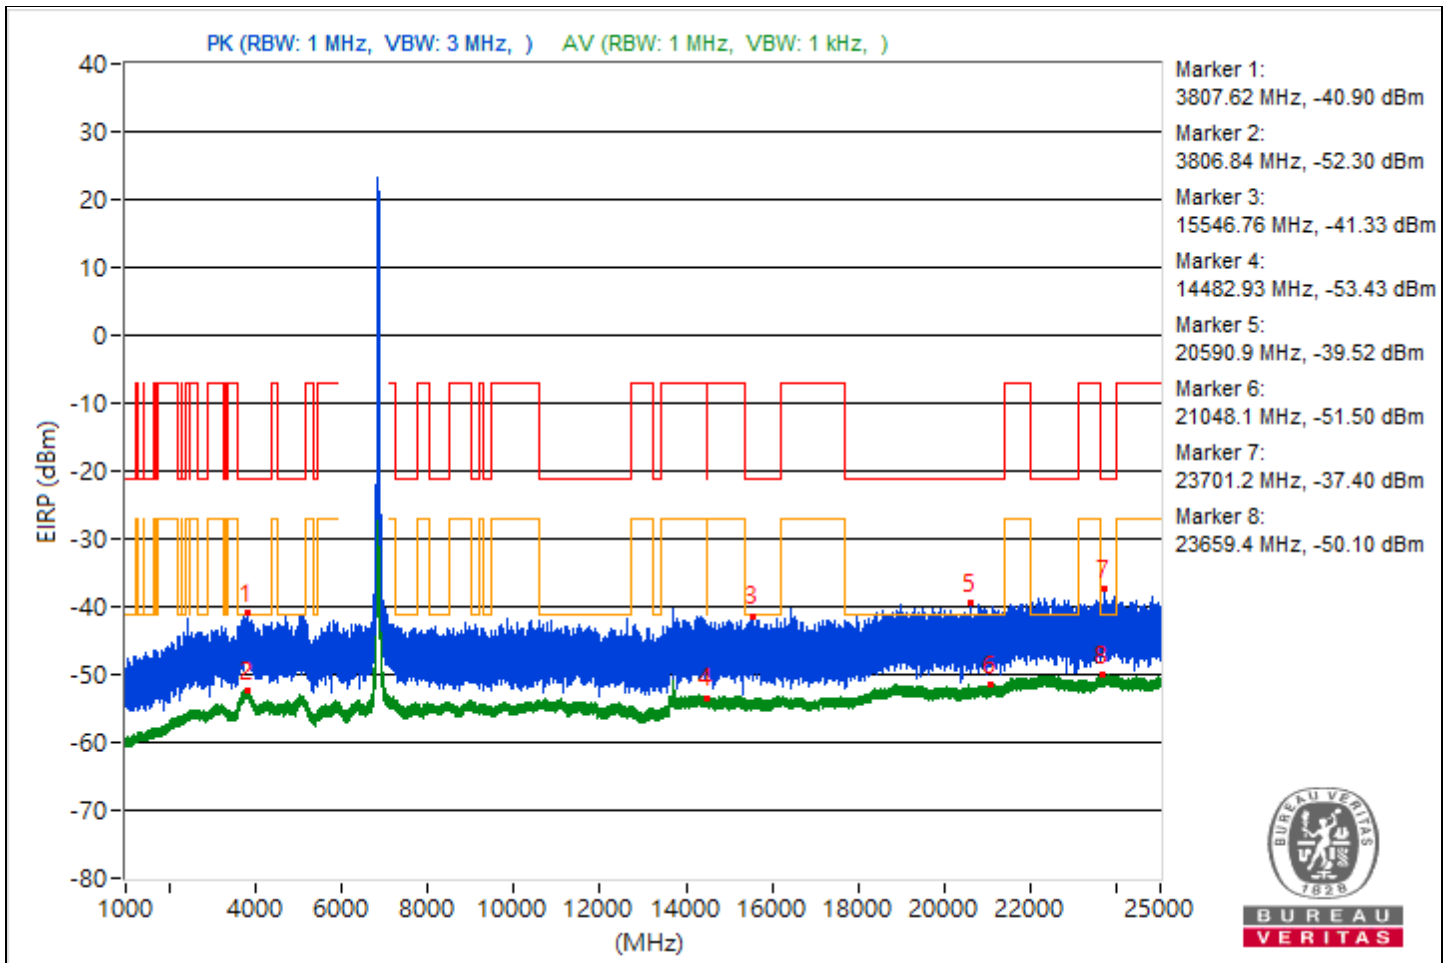

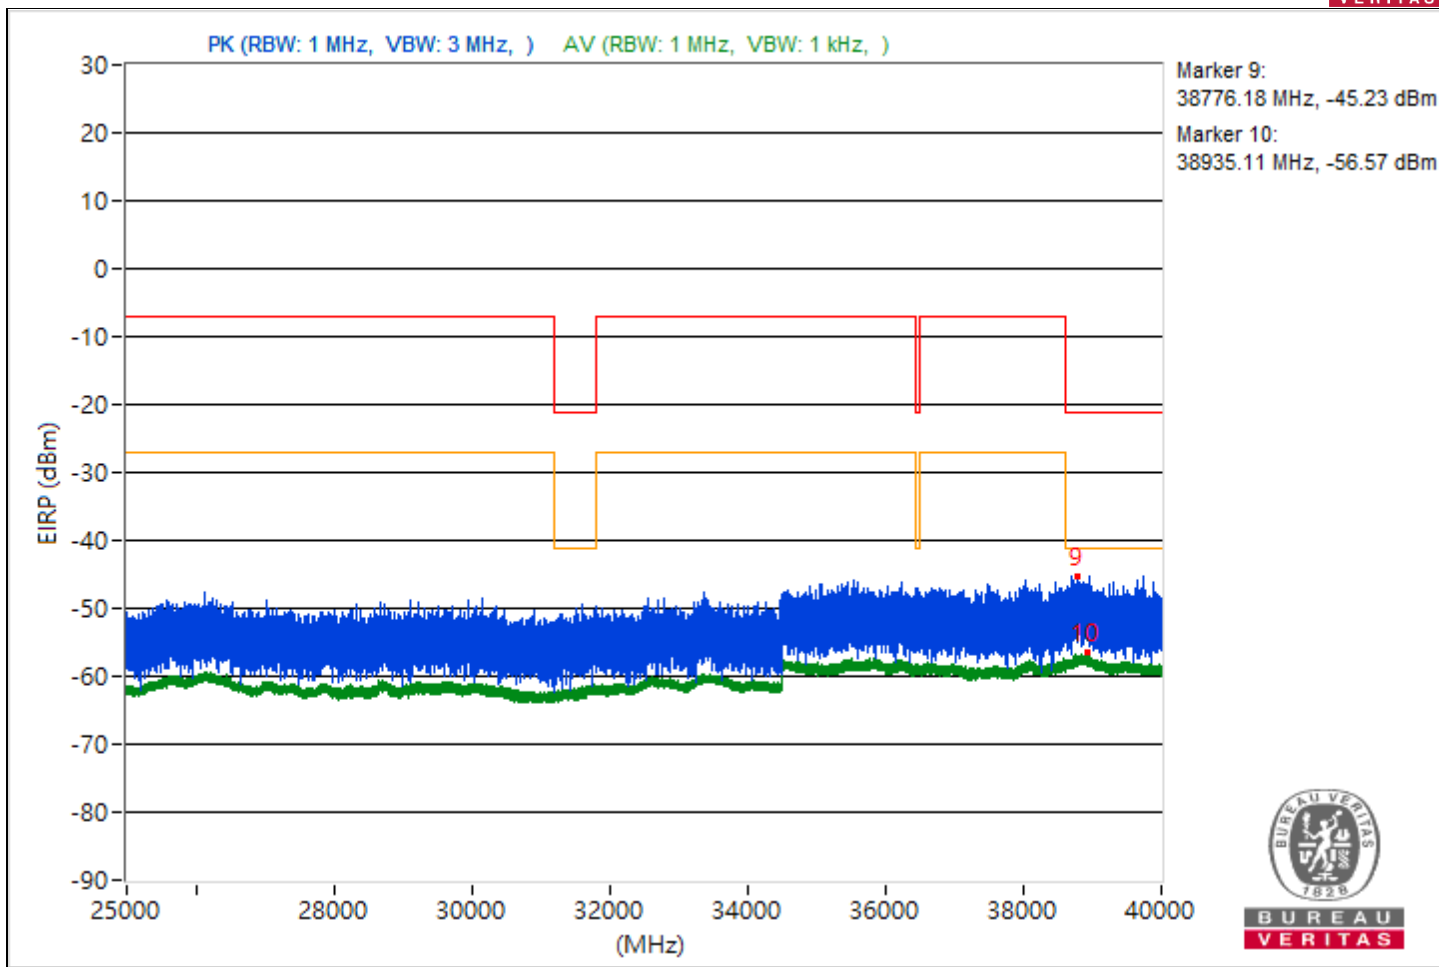


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5956.73	119.97 PK			19.95	4.76	24.71
2	*5955.9	110.65 AV			10.63	4.76	15.39
3	#5924.6	80.64 PK	88.26	-7.62	-19.38	4.76	-14.62
4	#5924.7	66.29 AV	68.26	-1.97	-33.73	4.76	-28.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

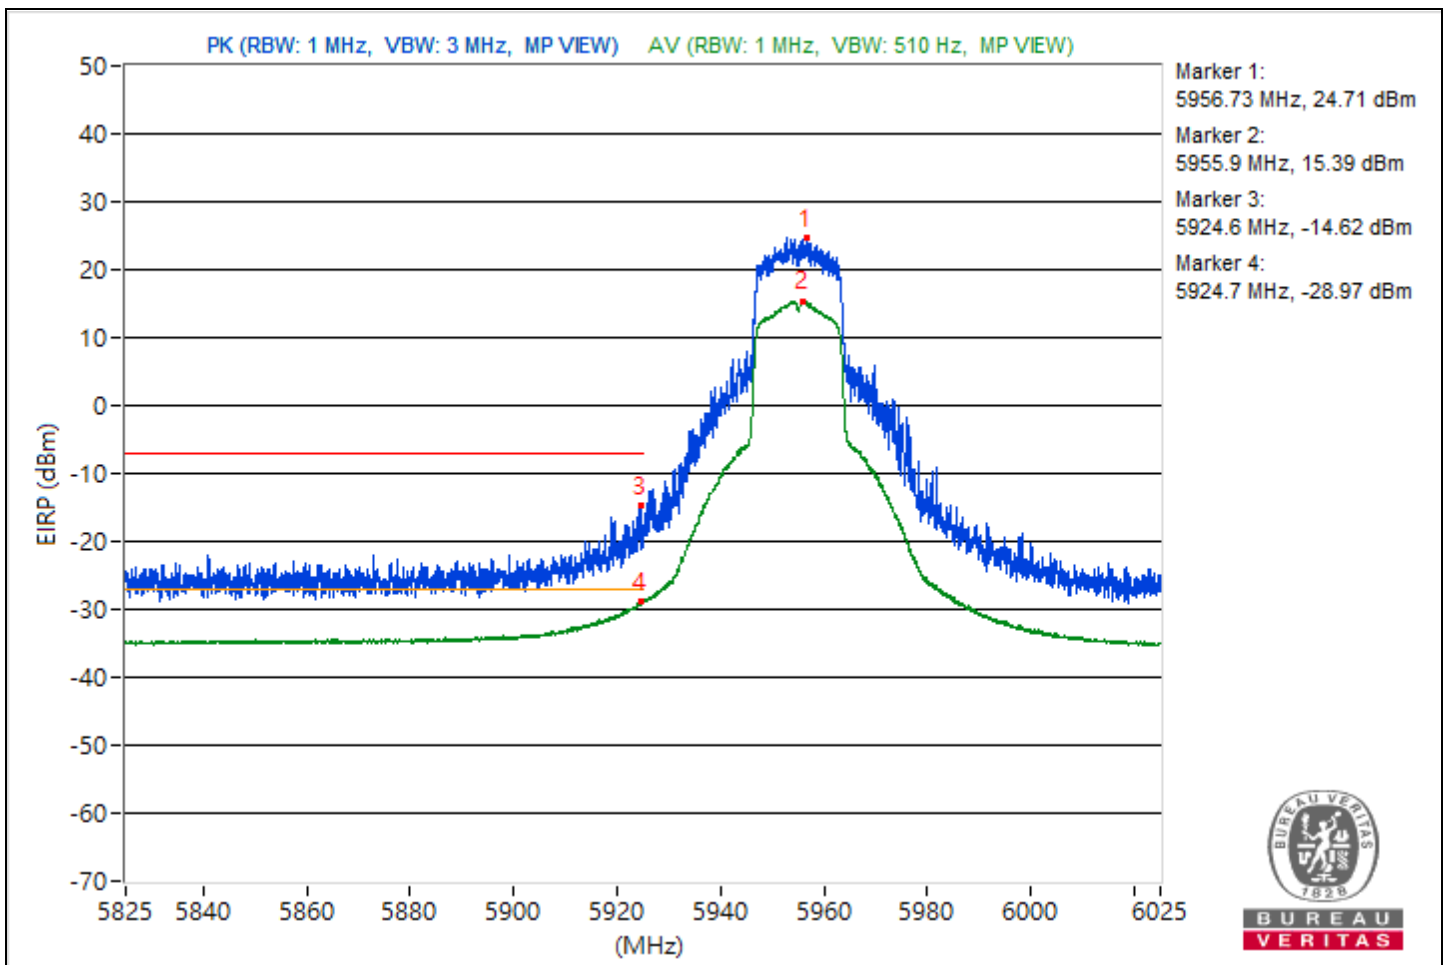


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.35	119.4 PK			19.53	4.61	24.14
2	*6853.99	110.12 AV			10.25	4.61	14.86
3	#7137.37	62.4 PK	88.26	-25.86	-37.47	4.61	-32.86
4	#7196.77	50.72 AV	68.26	-17.54	-49.15	4.61	-44.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

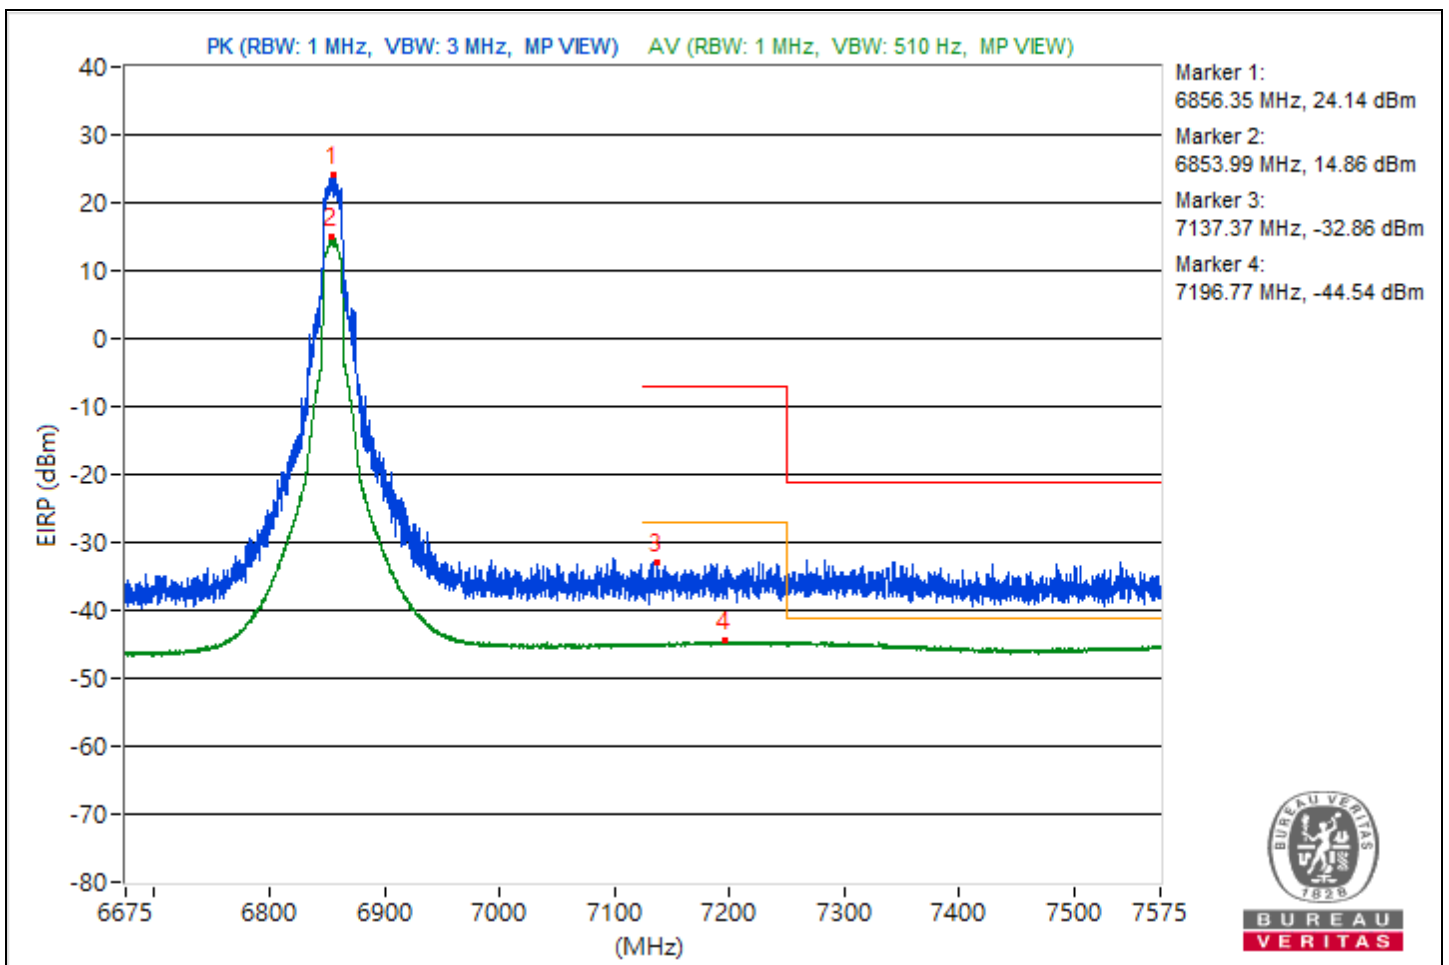





For 1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3933.86	54.39 PK	74	-19.61	-45.79	4.92	-40.87
2	3771.3	43.05 AV	54	-10.95	-57.13	4.92	-52.21
3	11901.42	53.66 PK	74	-20.34	-46.52	4.92	-41.6
4	11908.71	43.86 AV	54	-10.14	-56.32	4.92	-51.4
5	20076.6	55.86 PK	74	-18.14	-44.32	4.92	-39.4
6	21142.9	43.96 AV	54	-10.04	-56.22	4.92	-51.3
7	22567.5	56.37 PK	74	-17.63	-43.81	4.92	-38.89
8	22509.4	45.14 AV	54	-8.86	-55.04	4.92	-50.12
9	38828.44	50.49 PK	74	-23.51	-49.69	4.92	-44.77
10	38815.02	38.35 AV	54	-15.65	-61.83	4.92	-56.91

Note: Margin value = Emission Level - Limit value

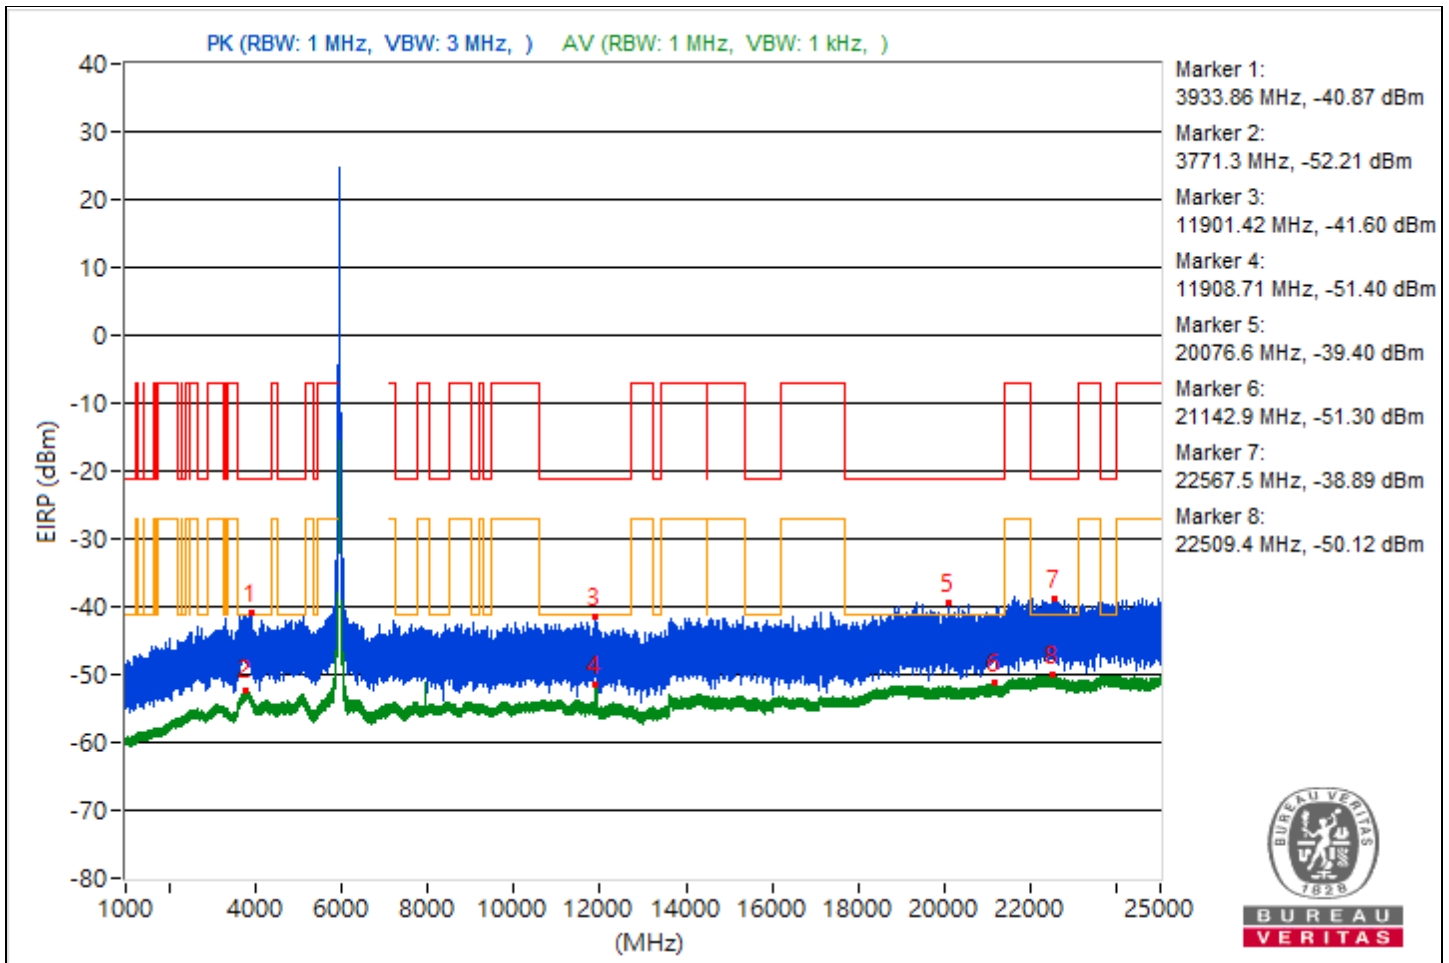

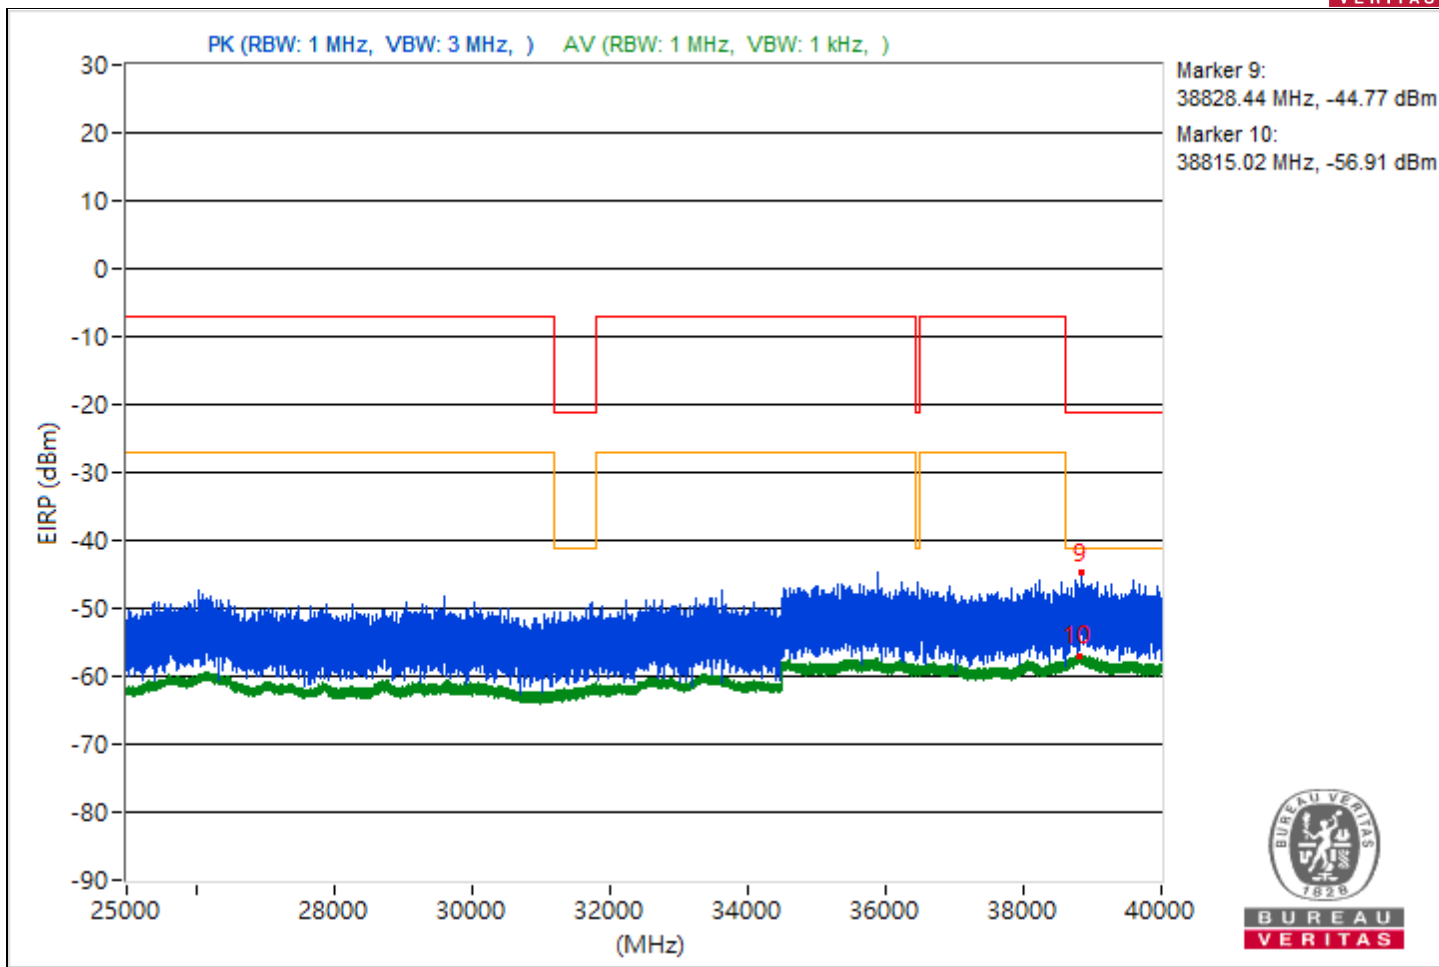





RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3851.33	54.94 PK	74	-19.06	-45.24	4.92	-40.32
2	3805.13	42.9 AV	54	-11.1	-57.28	4.92	-52.36
3	12352.98	53.93 PK	74	-20.07	-46.25	4.92	-41.33
4	12349.96	43.64 AV	54	-10.36	-56.54	4.92	-51.62
5	19063.4	55.97 PK	74	-18.03	-44.21	4.92	-39.29
6	21130.3	43.97 AV	54	-10.03	-56.21	4.92	-51.29
7	23656.2	56.96 PK	74	-17.04	-43.22	4.92	-38.3
8	22402.9	45.24 AV	54	-8.76	-54.94	4.92	-50.02
9	39427.02	49.84 PK	74	-24.16	-50.34	4.92	-45.42
10	38826.4	38.39 AV	54	-15.61	-61.79	4.92	-56.87

Note: Margin value = Emission Level - Limit value

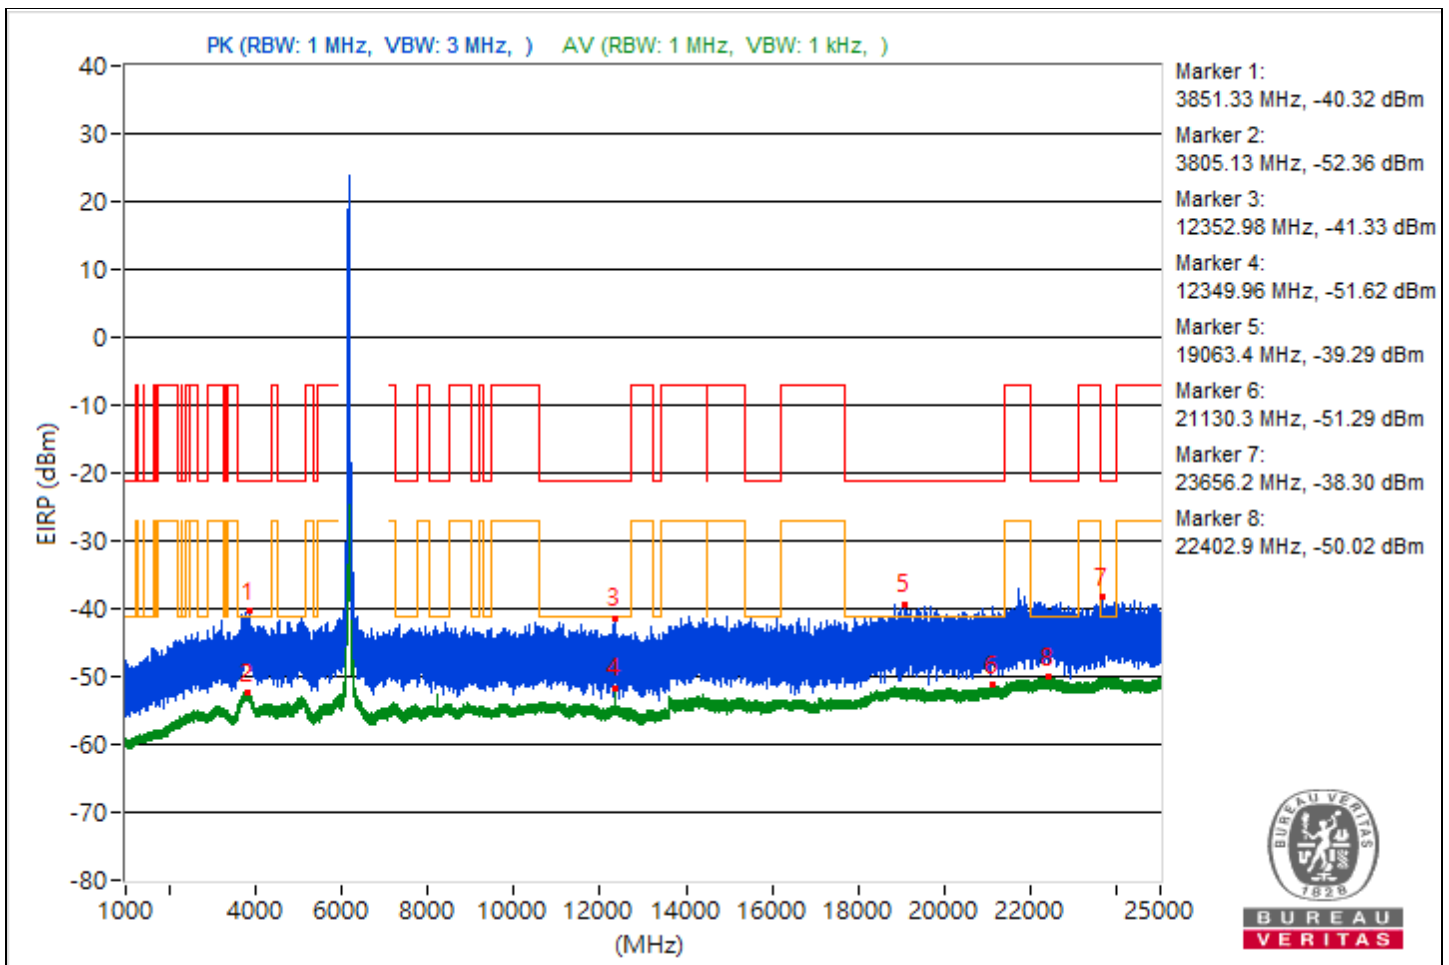

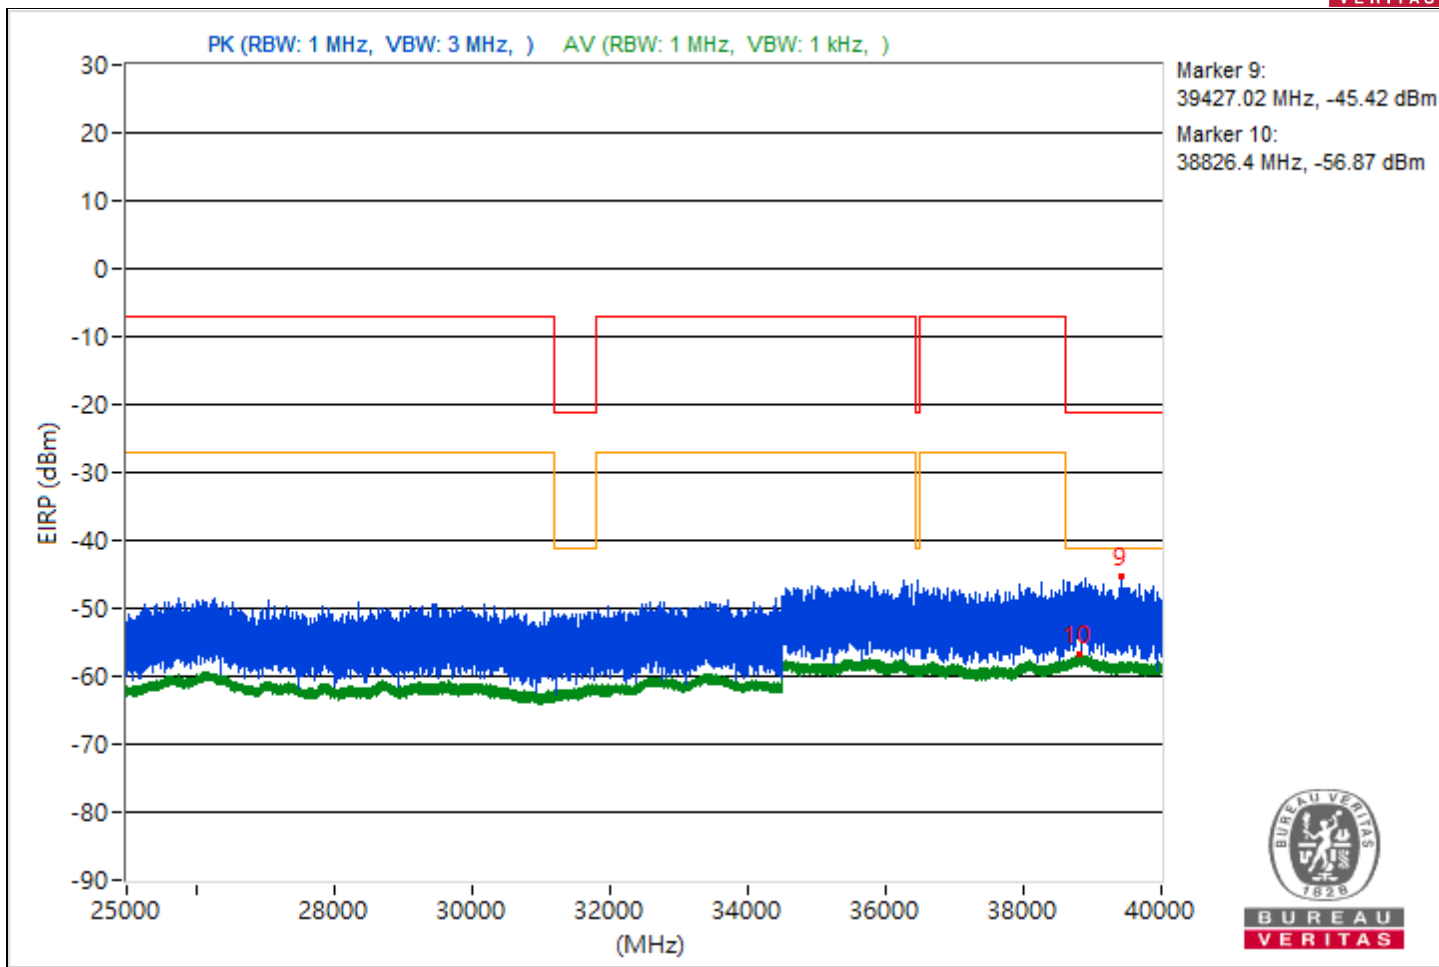





RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.53	54.83 PK	74	-19.17	-45.35	4.92	-40.43
2	3767.8	43.06 AV	54	-10.94	-57.12	4.92	-52.2
3	14472.8	53.56 PK	74	-20.44	-46.62	4.92	-41.7
4	14470.84	41.82 AV	54	-12.18	-58.36	4.92	-53.44
5	18575.8	55.53 PK	74	-18.47	-44.65	4.92	-39.73
6	21159.8	43.8 AV	54	-10.2	-56.38	4.92	-51.46
7	22440.5	57.09 PK	74	-16.91	-43.09	4.92	-38.17
8	22360.7	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	38949.42	50.35 PK	74	-23.65	-49.83	4.92	-44.91
10	38850.13	38.61 AV	54	-15.39	-61.57	4.92	-56.65

Note: Margin value = Emission Level - Limit value

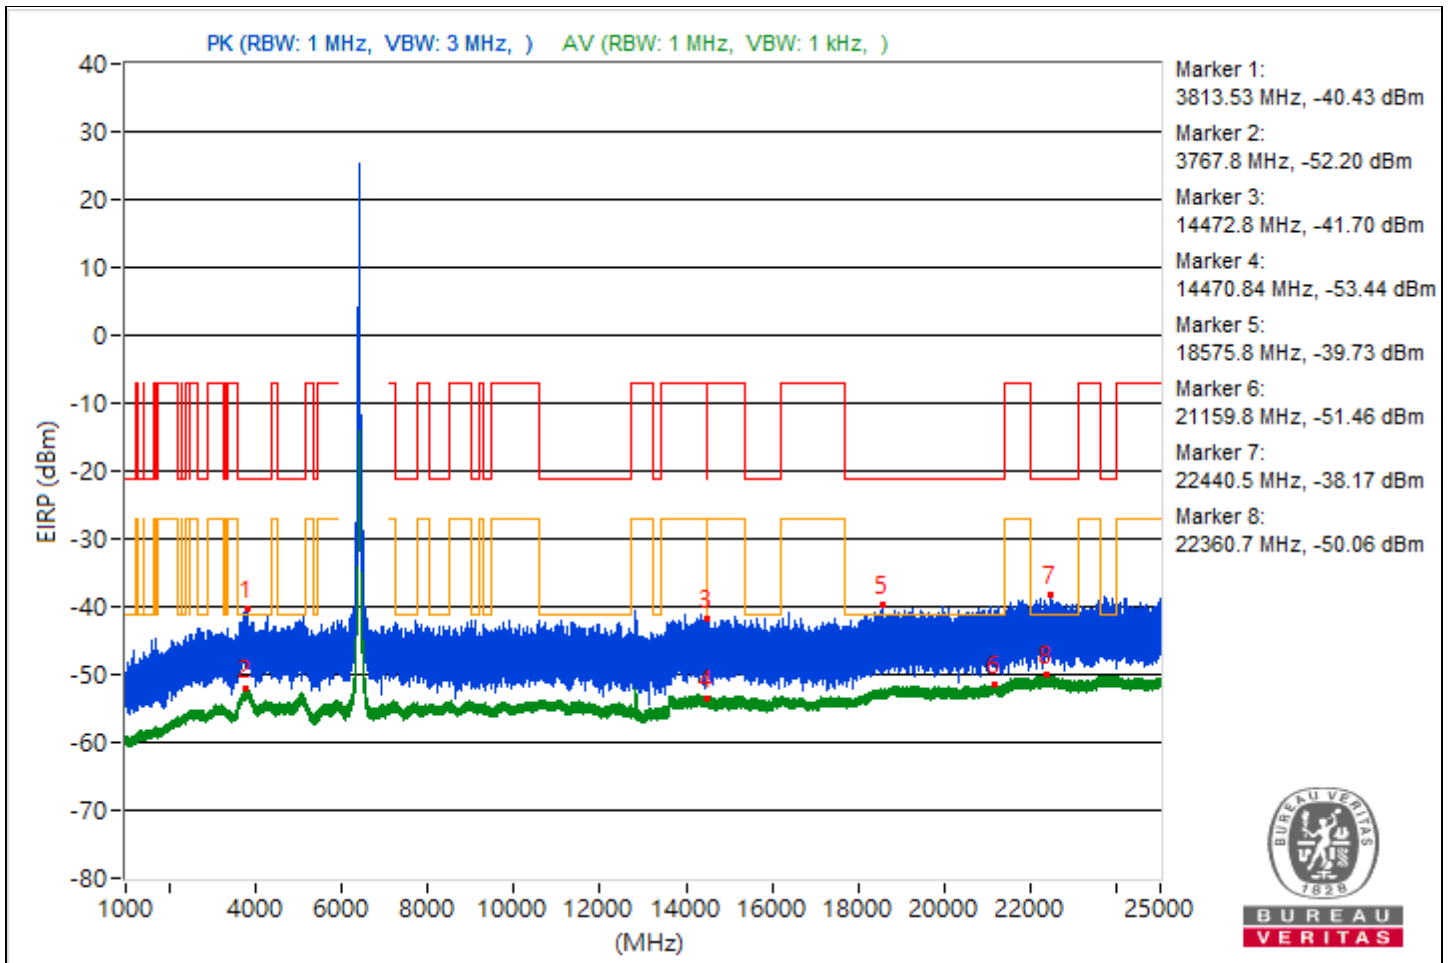

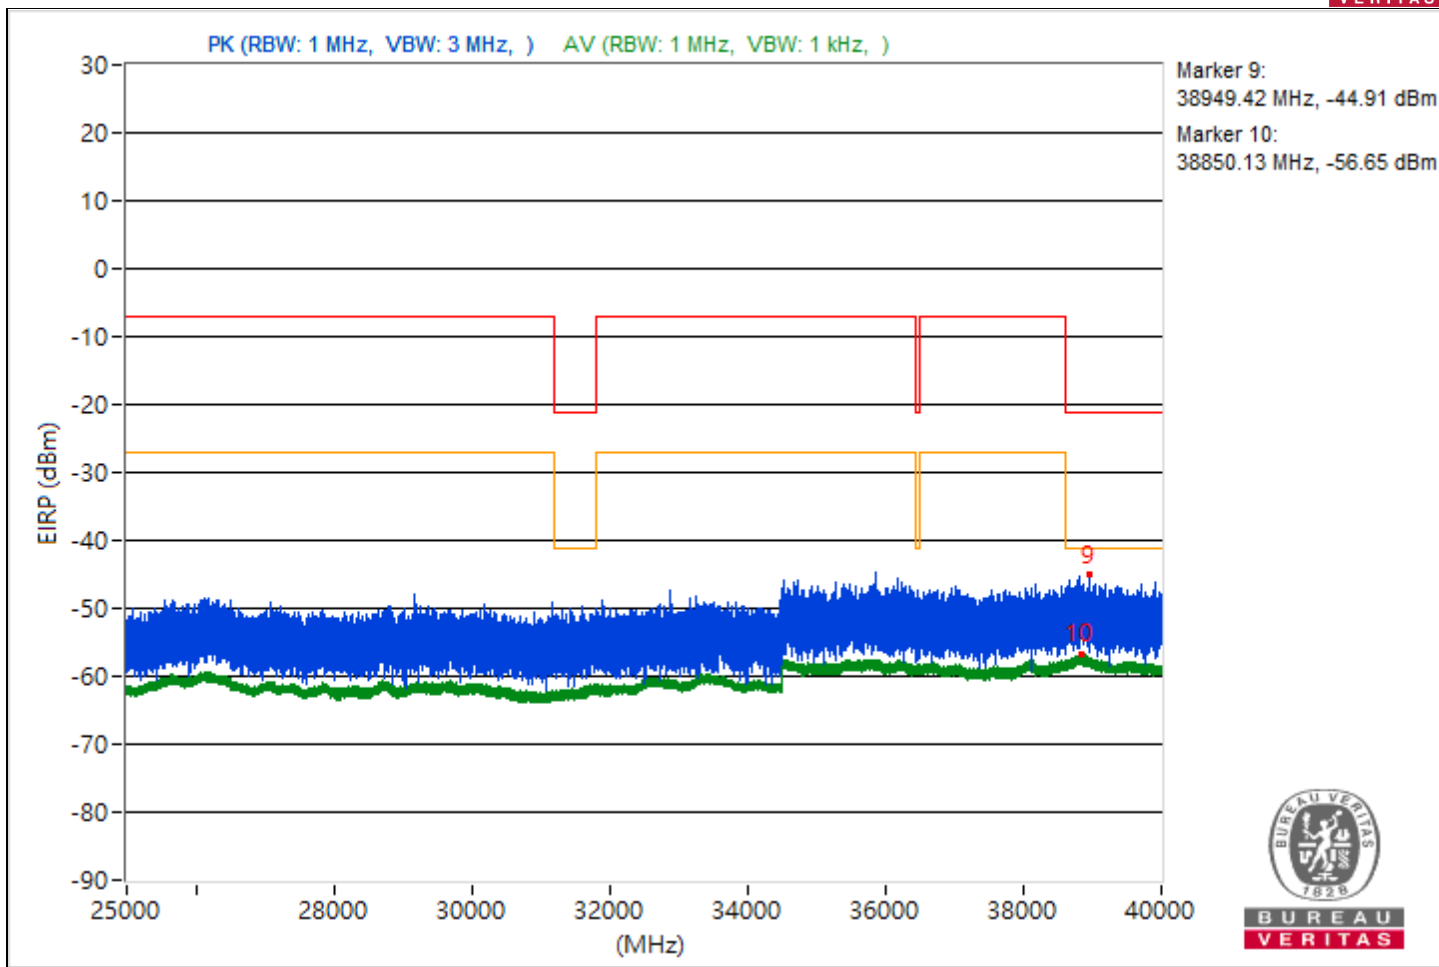





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.89	55.74 PK	74	-18.26	-44.44	4.92	-39.52
2	3818.59	43.08 AV	54	-10.92	-57.1	4.92	-52.18
3	15652.09	53.53 PK	74	-20.47	-46.65	4.92	-41.73
4	14497.07	42 AV	54	-12	-58.18	4.92	-53.26
5	18797.6	55.91 PK	74	-18.09	-44.27	4.92	-39.35
6	21128.1	43.86 AV	54	-10.14	-56.32	4.92	-51.4
7	23715.5	57.02 PK	74	-16.98	-43.16	4.92	-38.24
8	22218.1	45.25 AV	54	-8.75	-54.93	4.92	-50.01
9	39237.24	50.06 PK	74	-23.94	-50.12	4.92	-45.2
10	38886.49	38.57 AV	54	-15.43	-61.61	4.92	-56.69

Note: Margin value = Emission Level - Limit value

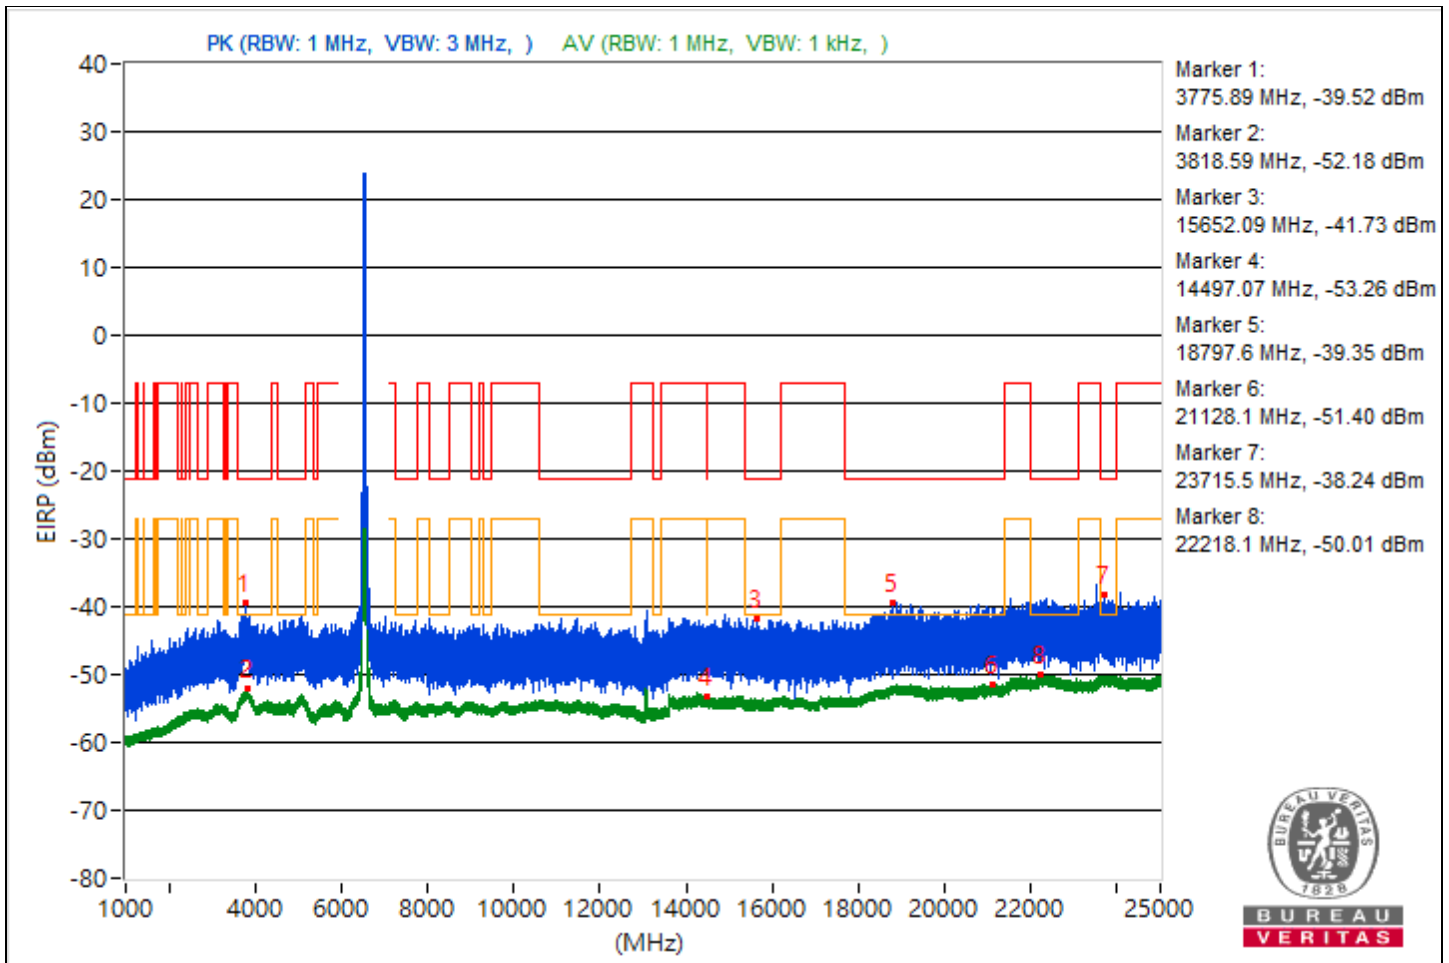

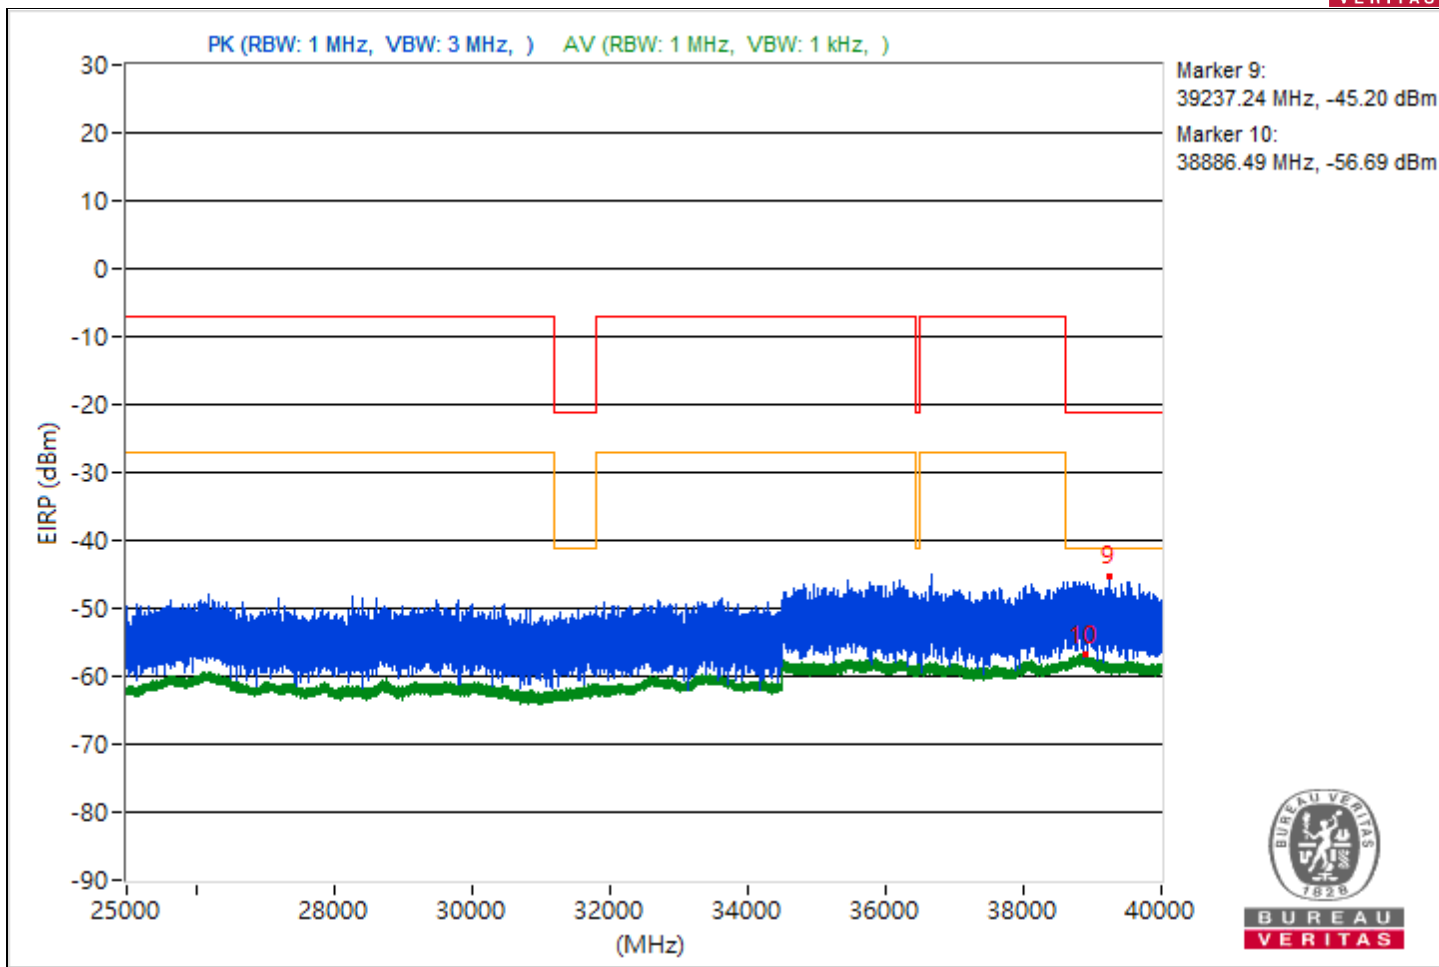





RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5094.61	54.25 PK	74	-19.75	-45.93	4.92	-41.01
2	3826.76	42.85 AV	54	-11.15	-57.33	4.92	-52.41
3	13393.78	54.29 PK	74	-19.71	-45.89	4.92	-40.97
4	13389.24	43.72 AV	54	-10.28	-56.46	4.92	-51.54
5	20240.8	56.14 PK	74	-17.86	-44.04	4.92	-39.12
6	21161.9	43.77 AV	54	-10.23	-56.41	4.92	-51.49
7	22369.6	57.21 PK	74	-16.79	-42.97	4.92	-38.05
8	22312.8	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	38908.98	49.47 PK	74	-24.53	-50.71	4.92	-45.79
10	38867.56	38.57 AV	54	-15.43	-61.61	4.92	-56.69

Note: Margin value = Emission Level - Limit value

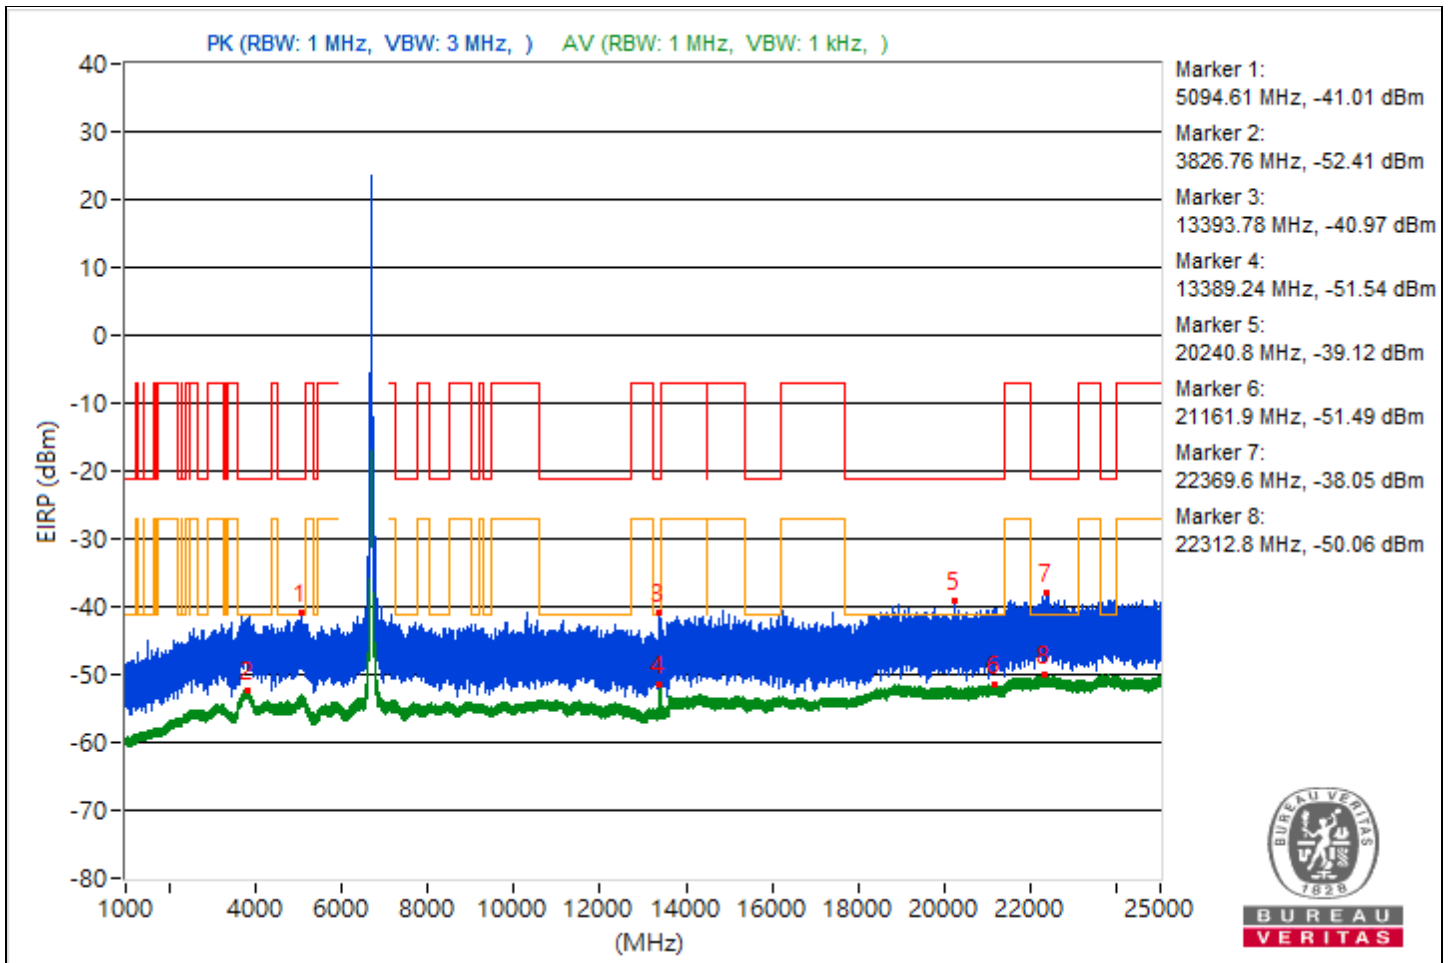

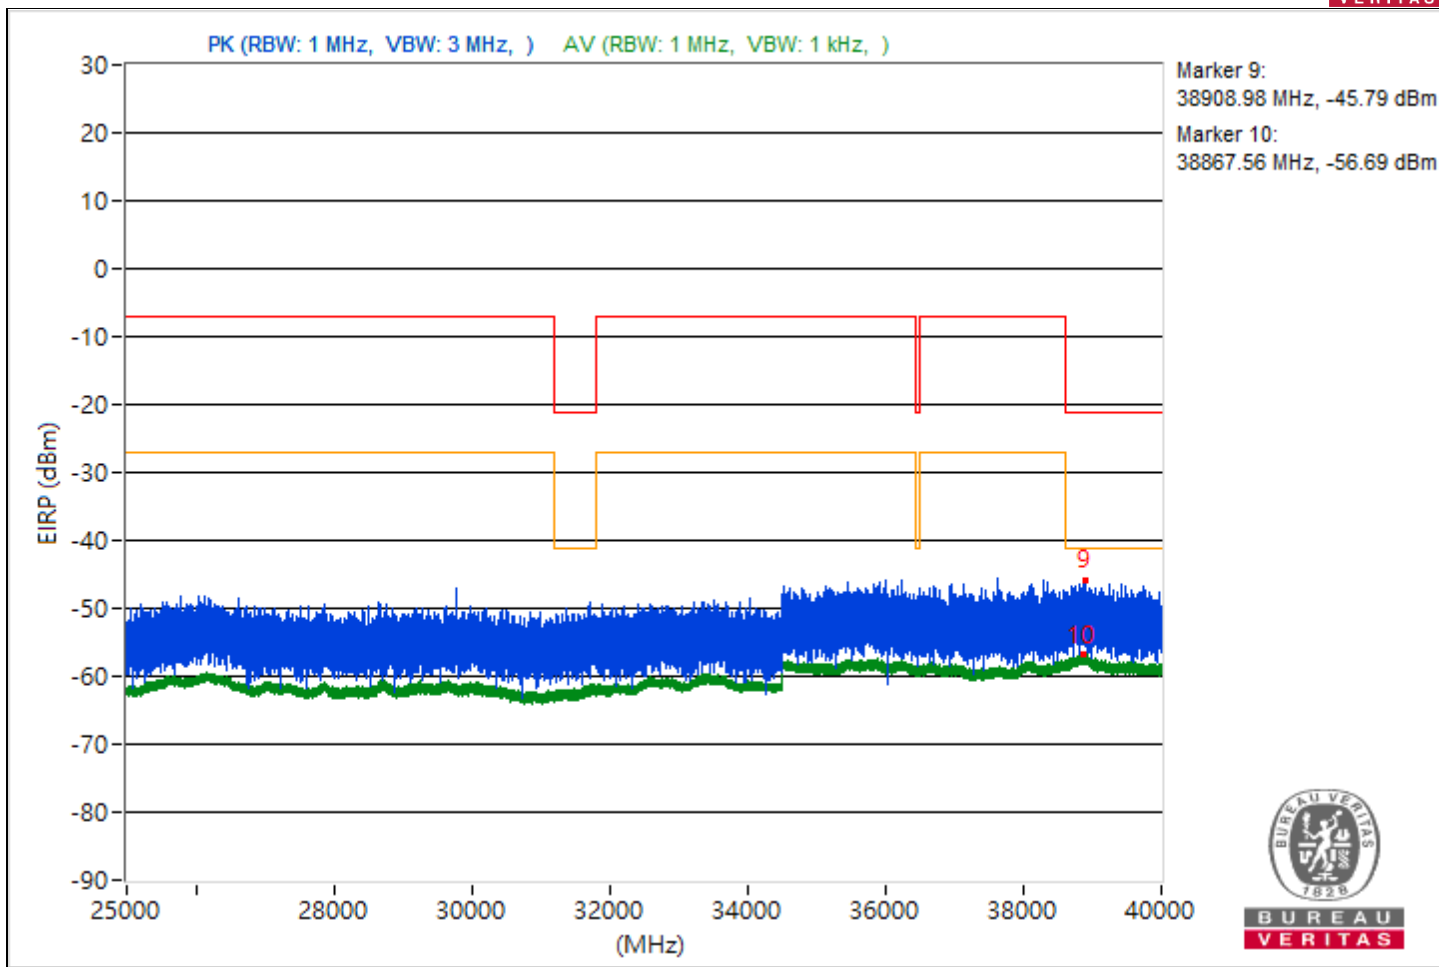





RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.74	54.36 PK	74	-19.64	-45.82	4.92	-40.9
2	3802.02	42.95 AV	54	-11.05	-57.23	4.92	-52.31
3	10796.36	53.88 PK	74	-20.12	-46.3	4.92	-41.38
4	14477.33	42.02 AV	54	-11.98	-58.16	4.92	-53.24
5	19048.9	56.06 PK	74	-17.94	-44.12	4.92	-39.2
6	21090.2	43.83 AV	54	-10.17	-56.35	4.92	-51.43
7	22510.6	57.15 PK	74	-16.85	-43.03	4.92	-38.11
8	23714.9	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	38843.11	49.42 PK	74	-24.58	-50.76	4.92	-45.84
10	38852.62	38.48 AV	54	-15.52	-61.7	4.92	-56.78

Note: Margin value = Emission Level - Limit value

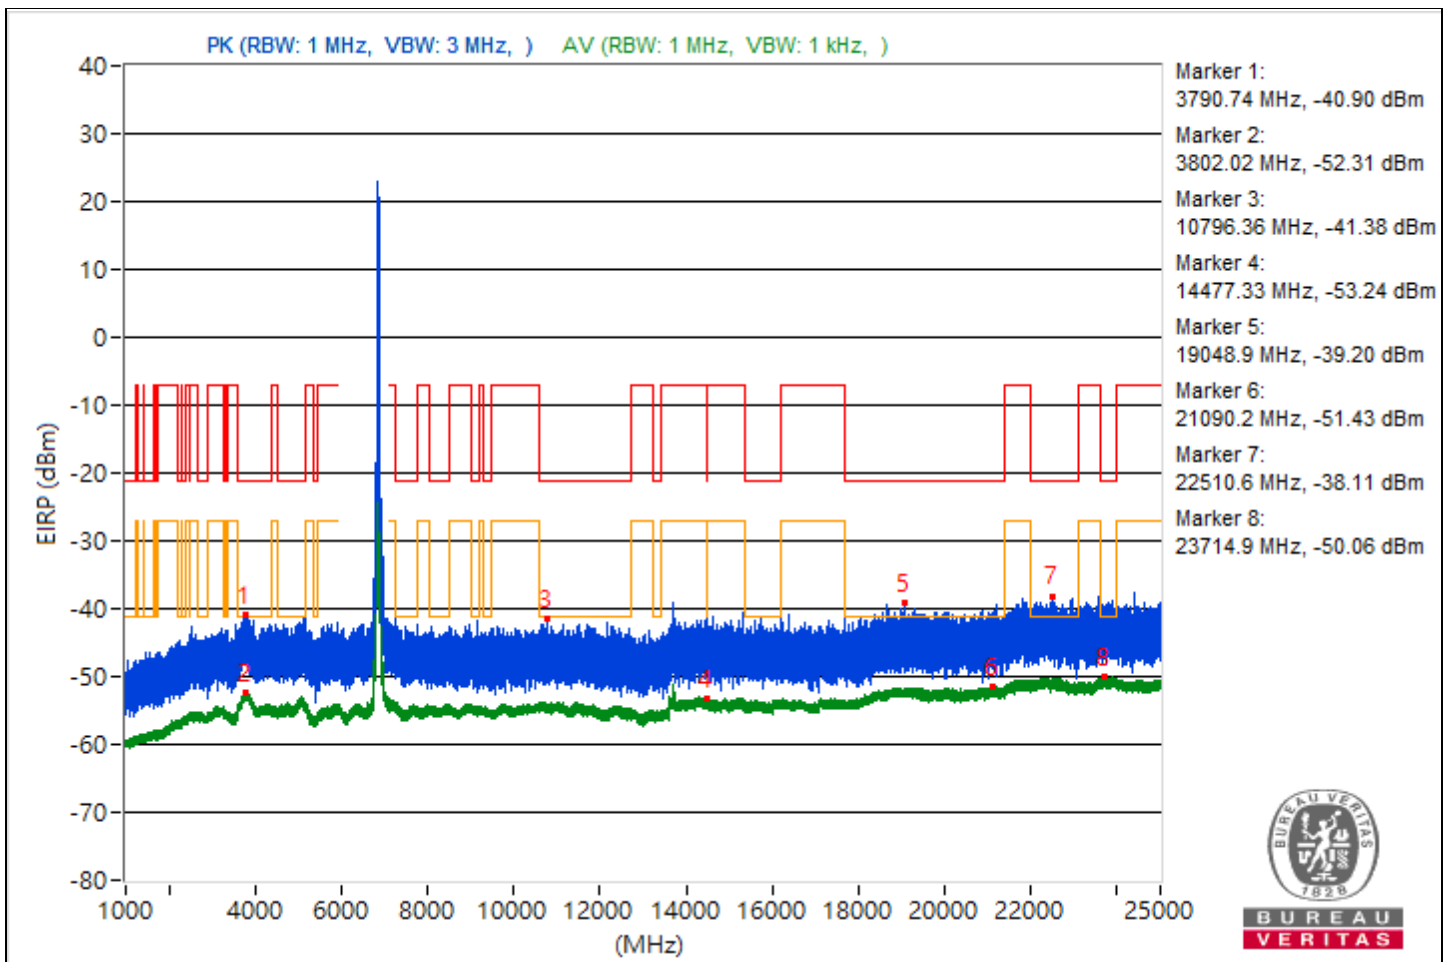

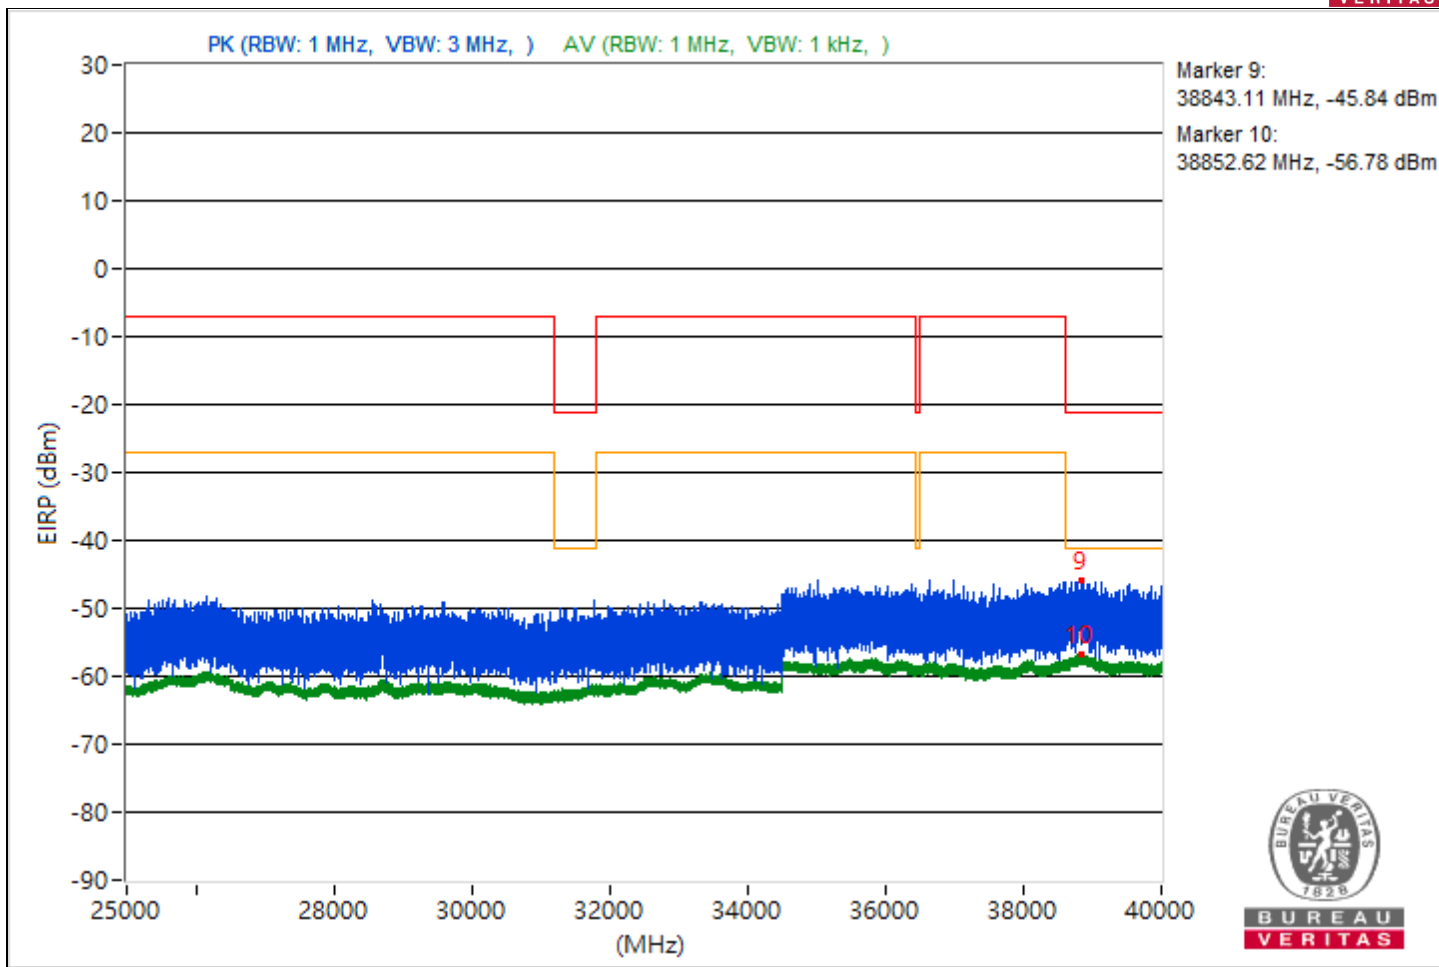





RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3863.08	55.82 PK	74	-18.18	-44.36	4.92	-39.44
2	3829.32	42.9 AV	54	-11.1	-57.28	4.92	-52.36
3	7540.41	54.11 PK	74	-19.89	-46.07	4.92	-41.15
4	14491.56	41.88 AV	54	-12.12	-58.3	4.92	-53.38
5	19375.3	55.83 PK	74	-18.17	-44.35	4.92	-39.43
6	20823	43.94 AV	54	-10.06	-56.24	4.92	-51.32
7	22519	56.59 PK	74	-17.41	-43.59	4.92	-38.67
8	22302.3	45.15 AV	54	-8.85	-55.03	4.92	-50.11
9	38839.2	49.15 PK	74	-24.85	-51.03	4.92	-46.11
10	38807.02	38.49 AV	54	-15.51	-61.69	4.92	-56.77

Note: Margin value = Emission Level - Limit value

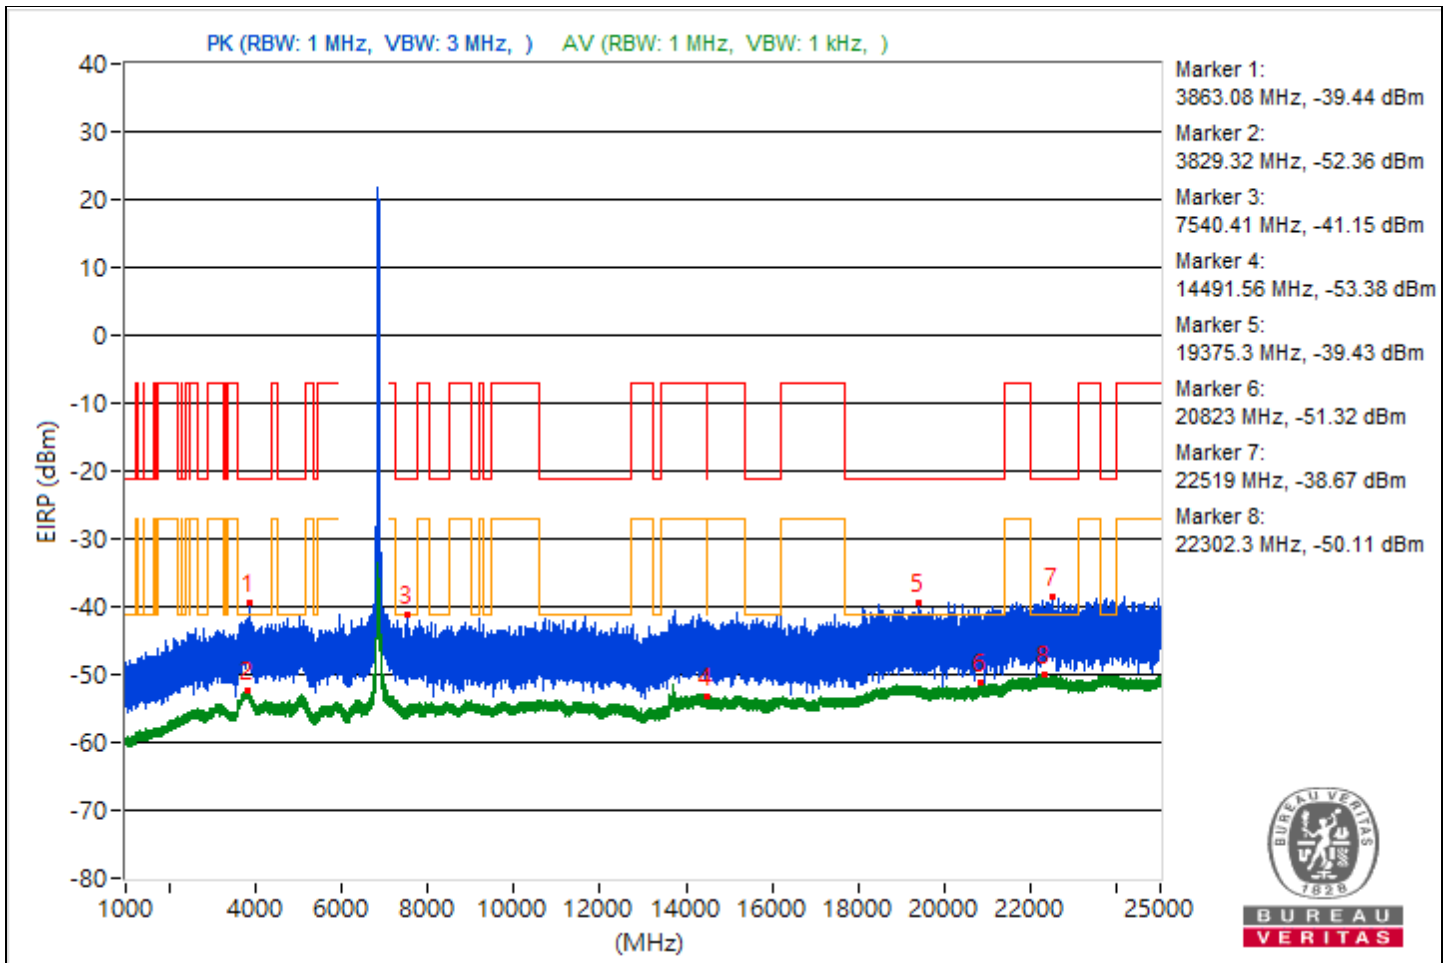

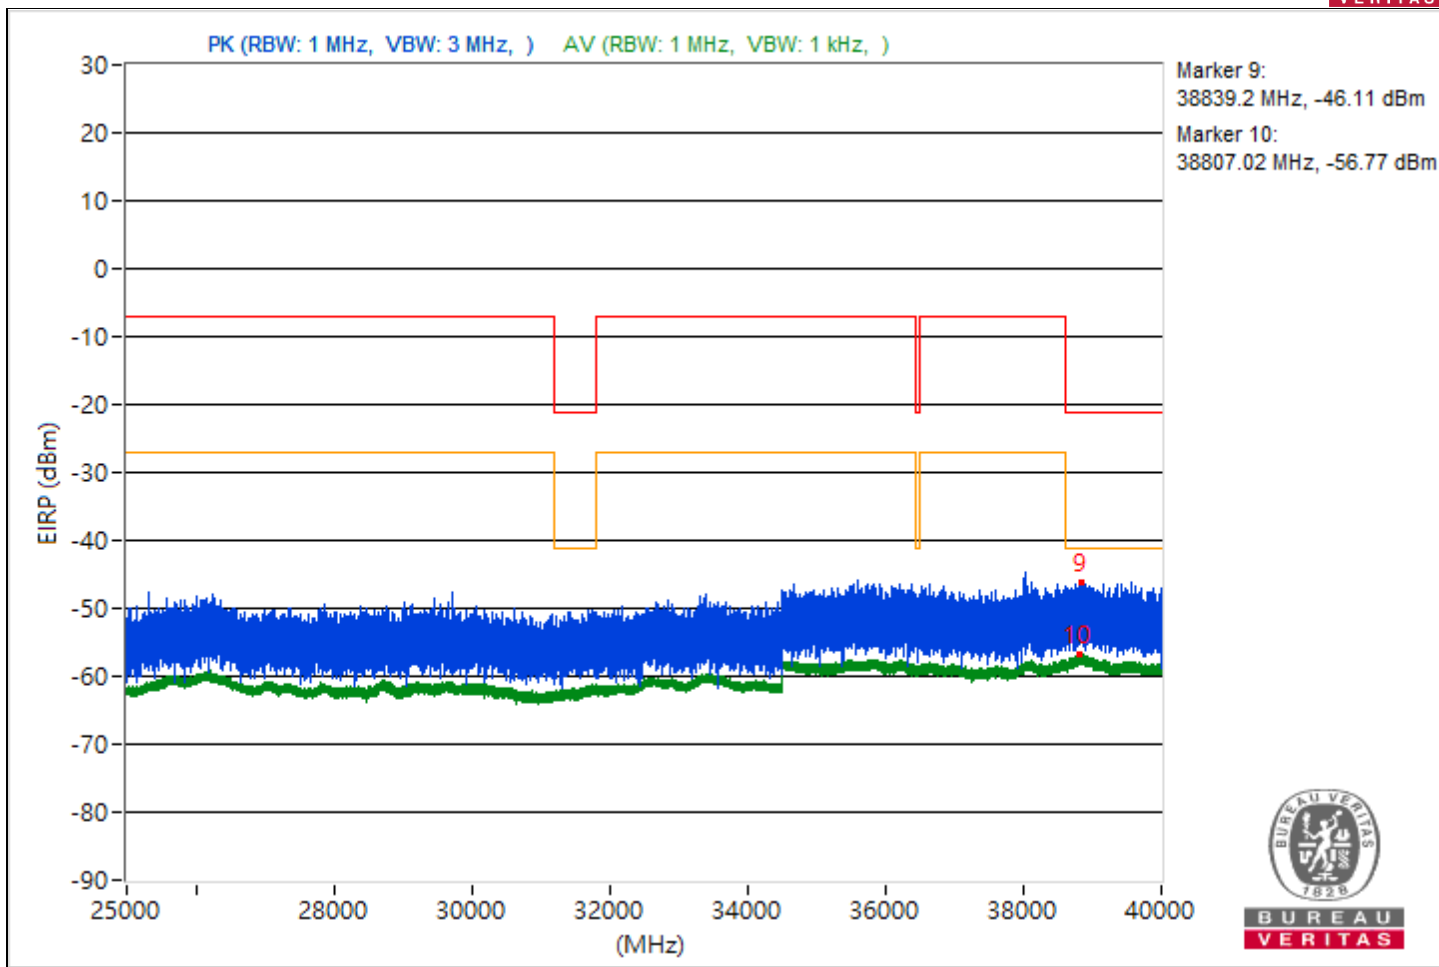





RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4742.04	54.38 PK	74	-19.62	-45.8	4.92	-40.88
2	3823.26	42.95 AV	54	-11.05	-57.23	4.92	-52.31
3	15551.29	53.23 PK	74	-20.77	-46.95	4.92	-42.03
4	8219.91	42.75 AV	54	-11.25	-57.43	4.92	-52.51
5	18511.6	59.6 PK	74	-14.4	-40.58	4.92	-35.66
6	21096.7	43.78 AV	54	-10.22	-56.4	4.92	-51.48
7	23787.3	56.7 PK	74	-17.3	-43.48	4.92	-38.56
8	23661.3	45.04 AV	54	-8.96	-55.14	4.92	-50.22
9	38791.2	49.81 PK	74	-24.19	-50.37	4.92	-45.45
10	38853.33	38.31 AV	54	-15.69	-61.87	4.92	-56.95

Note: Margin value = Emission Level - Limit value

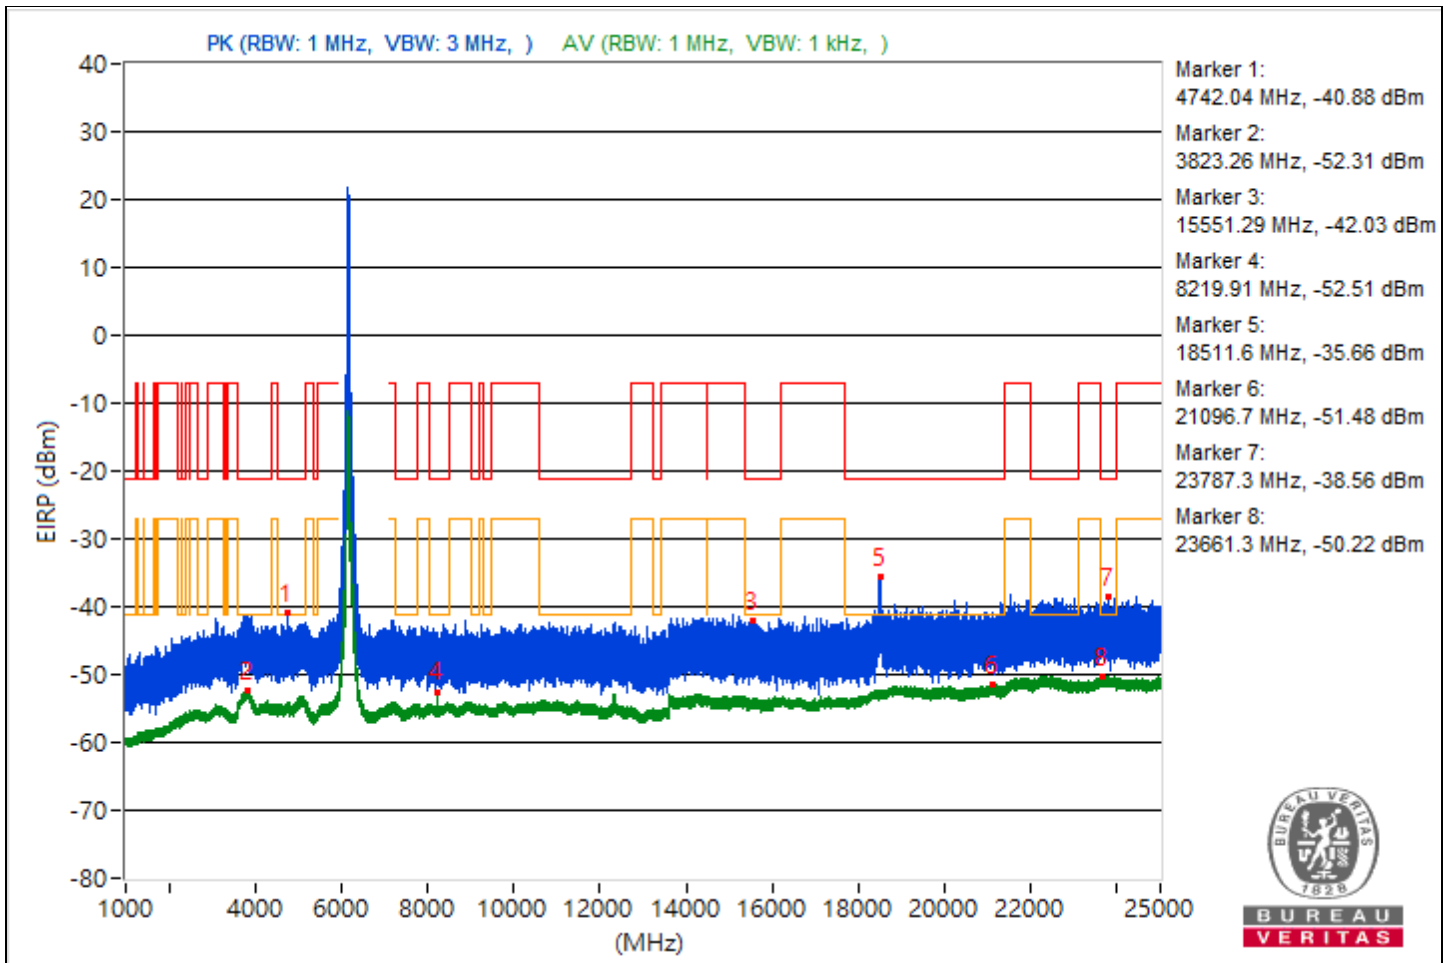

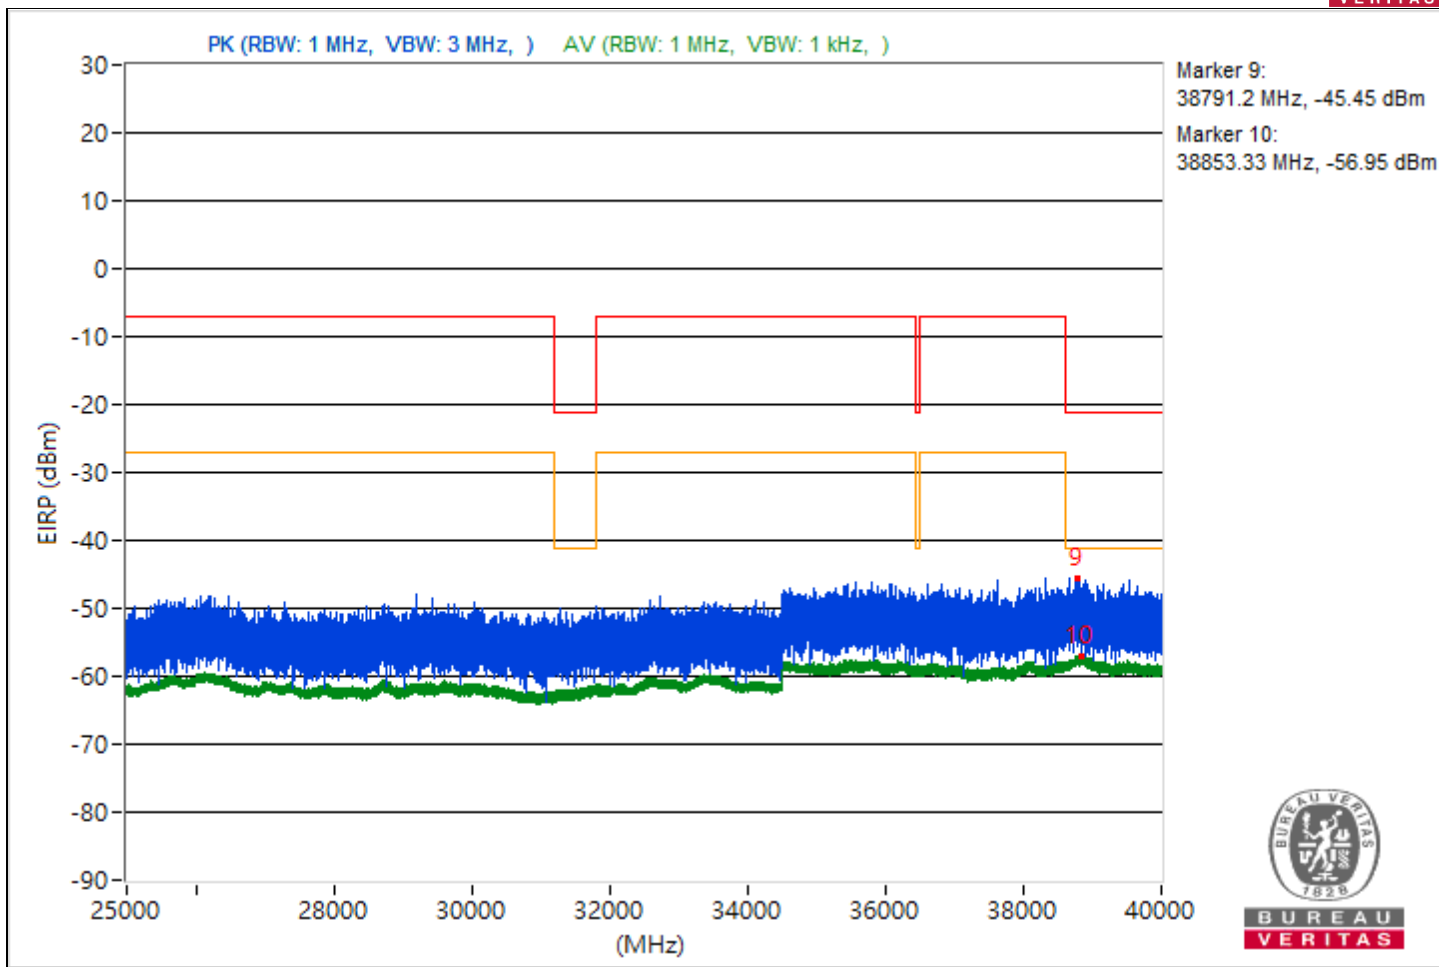





RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5073.22	55.36 PK	74	-18.64	-44.82	4.92	-39.9
2	3790.04	42.93 AV	54	-11.07	-57.25	4.92	-52.33
3	15550.31	54.43 PK	74	-19.57	-45.75	4.92	-40.83
4	14478.13	41.92 AV	54	-12.08	-58.26	4.92	-53.34
5	19209.4	65.93 PK	74	-8.07	-34.25	4.92	-29.33
6	19220.1	51.11 AV	54	-2.89	-49.07	4.92	-44.15
7	23979.8	57.14 PK	74	-16.86	-43.04	4.92	-38.12
8	22291.4	45.23 AV	54	-8.77	-54.95	4.92	-50.03
9	38850.58	49.99 PK	74	-24.01	-50.19	4.92	-45.27
10	38829.51	38.57 AV	54	-15.43	-61.61	4.92	-56.69

Note: Margin value = Emission Level - Limit value

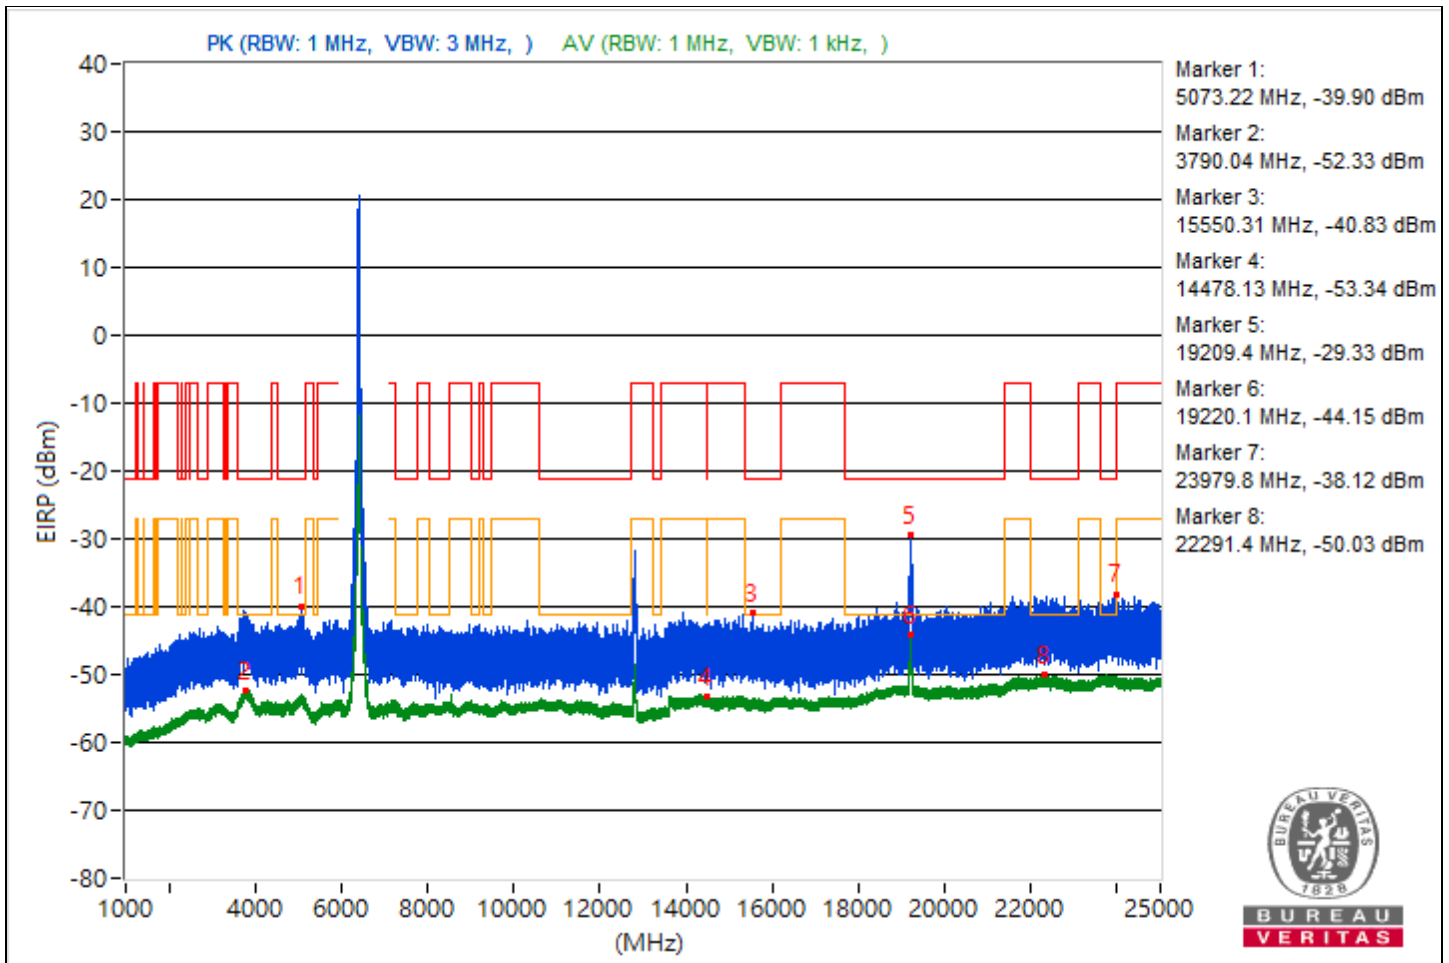

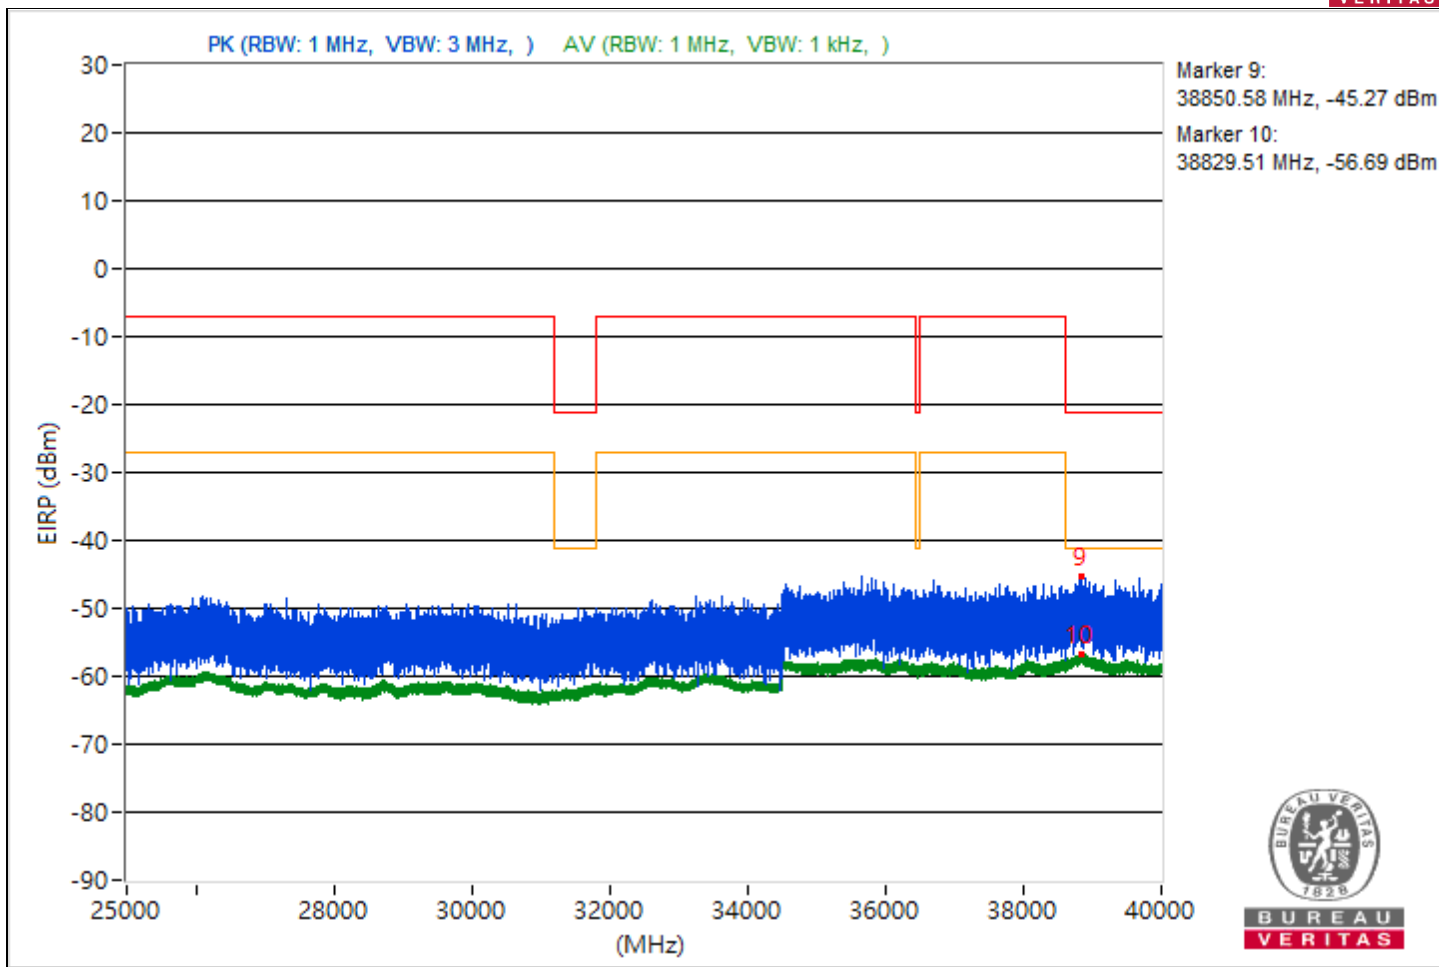



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3900.96	53.99 PK	74	-20.01	-46.19	4.92	-41.27
2	3754.97	42.94 AV	54	-11.06	-57.24	4.92	-52.32
3	12444.8	53.95 PK	74	-20.05	-46.23	4.92	-41.31
4	14496.44	41.83 AV	54	-12.17	-58.35	4.92	-53.43
5	19702.7	63.31 PK	74	-10.69	-36.87	4.92	-31.95
6	19693.6	53.25 AV	54	-0.75	-46.93	4.92	-42.01
7	23799.3	57.63 PK	74	-16.37	-42.55	4.92	-37.63
8	22281.5	45.24 AV	54	-8.76	-54.94	4.92	-50.02
9	38936.36	50.01 PK	74	-23.99	-50.17	4.92	-45.25
10	38865.07	38.5 AV	54	-15.5	-61.68	4.92	-56.76

Note: Margin value = Emission Level - Limit value

