





RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.58	54.55 PK	74	-19.45	-45.63	4.92	-40.71
2	3809.33	42.99 AV	54	-11.01	-57.19	4.92	-52.27
3	11481.69	54.91 PK	74	-19.09	-45.27	4.92	-40.35
4	14471.11	41.87 AV	54	-12.13	-58.31	4.92	-53.39
5	20167.6	61.83 PK	74	-12.17	-38.35	4.92	-33.43
6	20170.2	51.62 AV	54	-2.38	-48.56	4.92	-43.64
7	22580.8	57.24 PK	74	-16.76	-42.94	4.92	-38.02
8	22231.1	45.13 AV	54	-8.87	-55.05	4.92	-50.13
9	39002.93	50.51 PK	74	-23.49	-49.67	4.92	-44.75
10	38829.87	38.44 AV	54	-15.56	-61.74	4.92	-56.82

Note: Margin value = Emission Level - Limit value

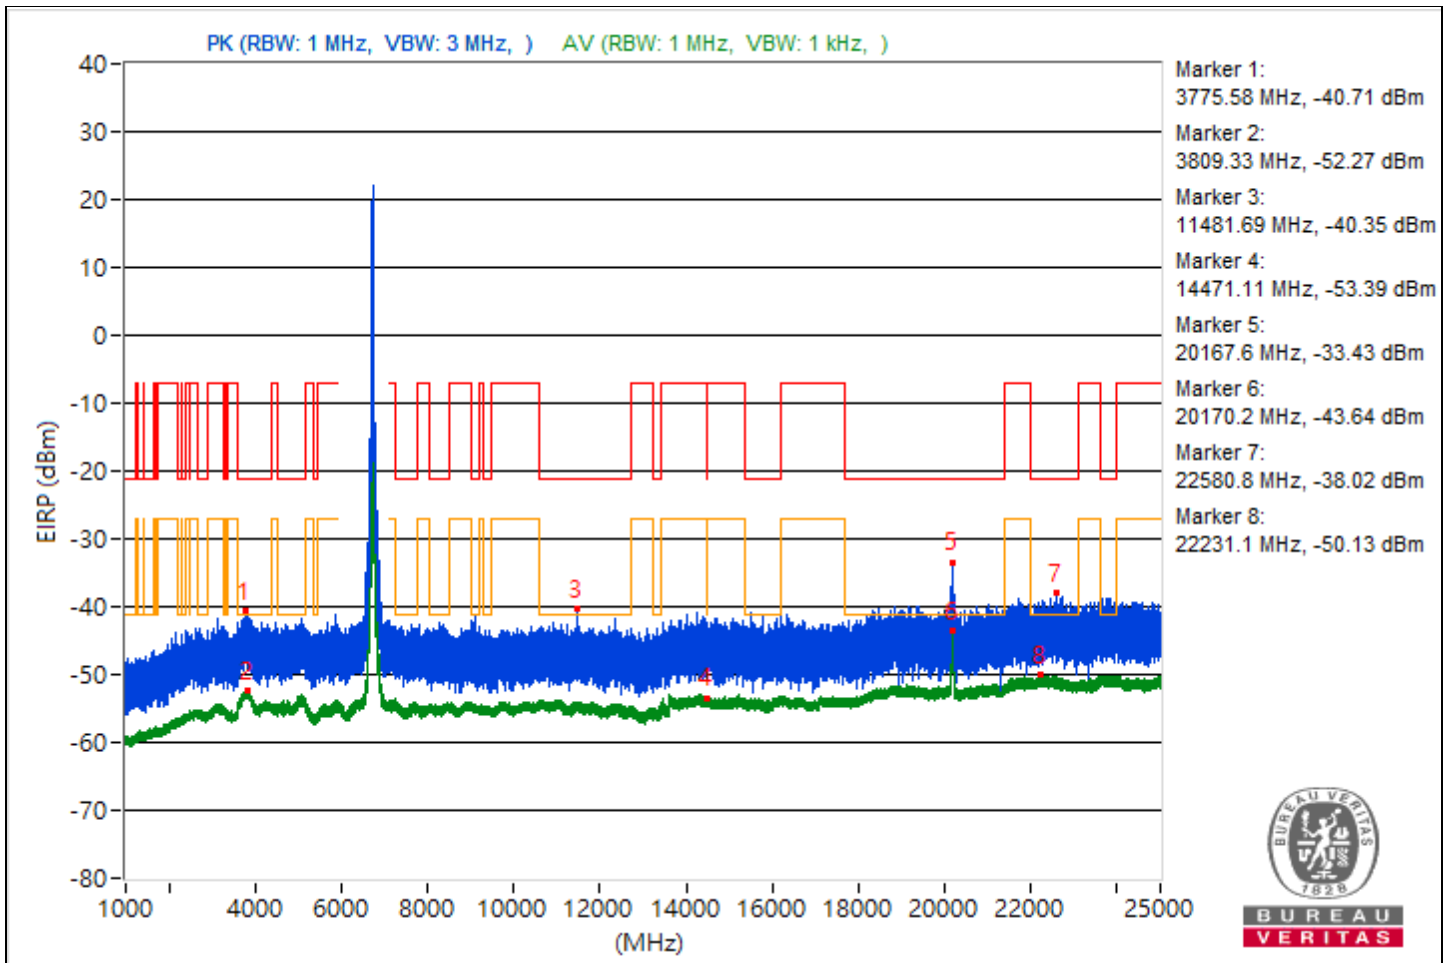

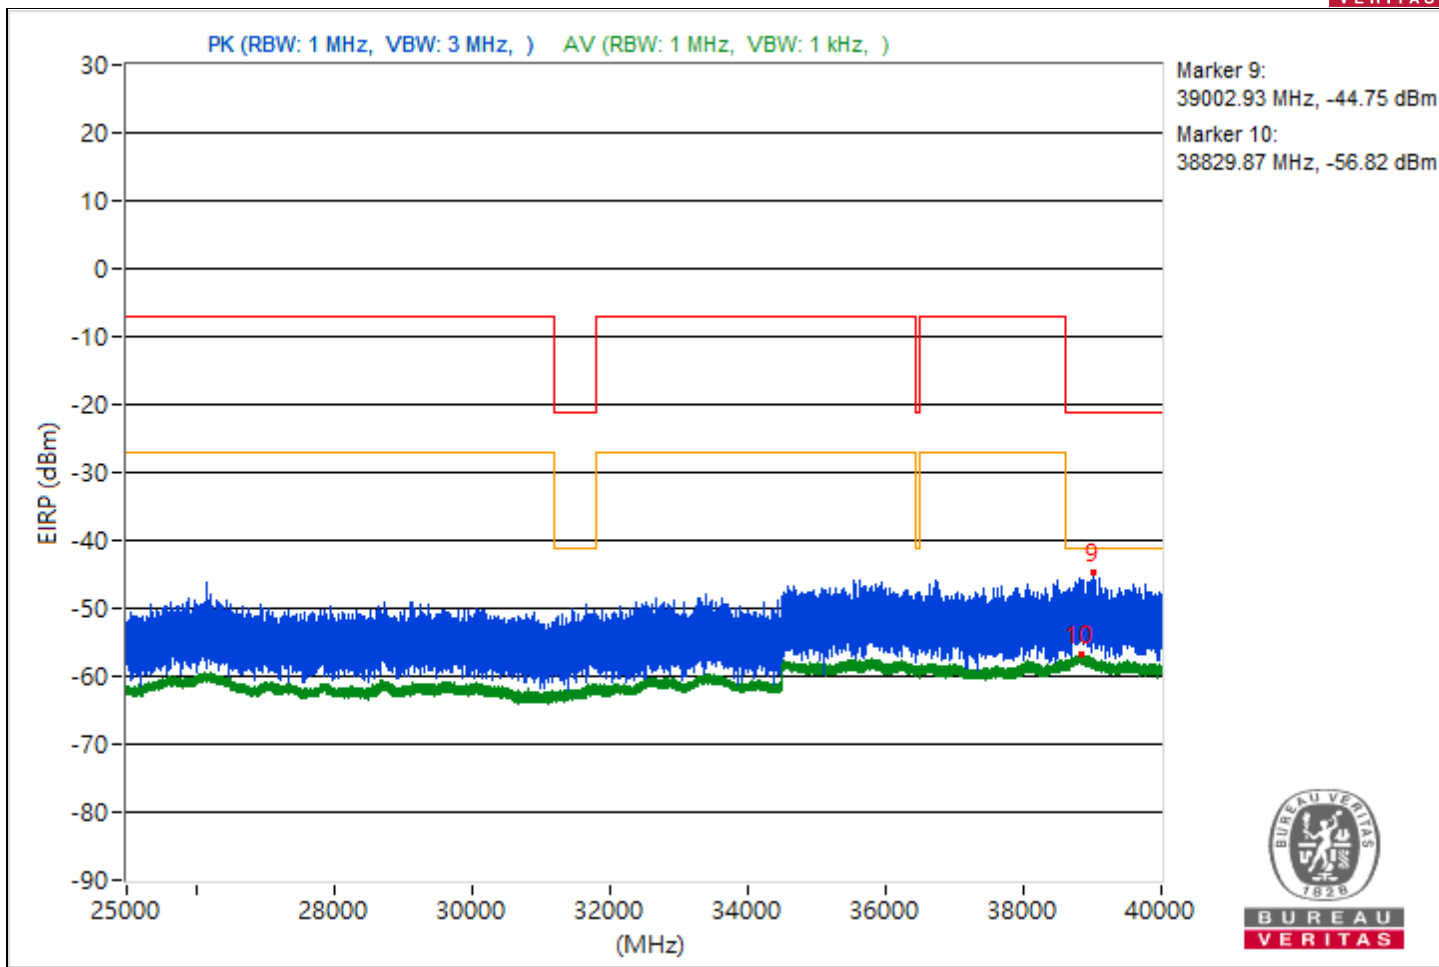





RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5142.21	54.98 PK	74	-19.02	-45.2	4.92	-40.28
2	3786.62	43.05 AV	54	-10.95	-57.13	4.92	-52.21
3	14477.07	53.89 PK	74	-20.11	-46.29	4.92	-41.37
4	14475.73	41.82 AV	54	-12.18	-58.36	4.92	-53.44
5	20536.8	61.9 PK	74	-12.1	-38.28	4.92	-33.36
6	20532.6	52.4 AV	54	-1.6	-47.78	4.92	-42.86
7	23852.1	57.16 PK	74	-16.84	-43.02	4.92	-38.1
8	22266.9	45.25 AV	54	-8.75	-54.93	4.92	-50.01
9	38845.33	50.19 PK	74	-23.81	-49.99	4.92	-45.07
10	38820.89	38.53 AV	54	-15.47	-61.65	4.92	-56.73

Note: Margin value = Emission Level - Limit value

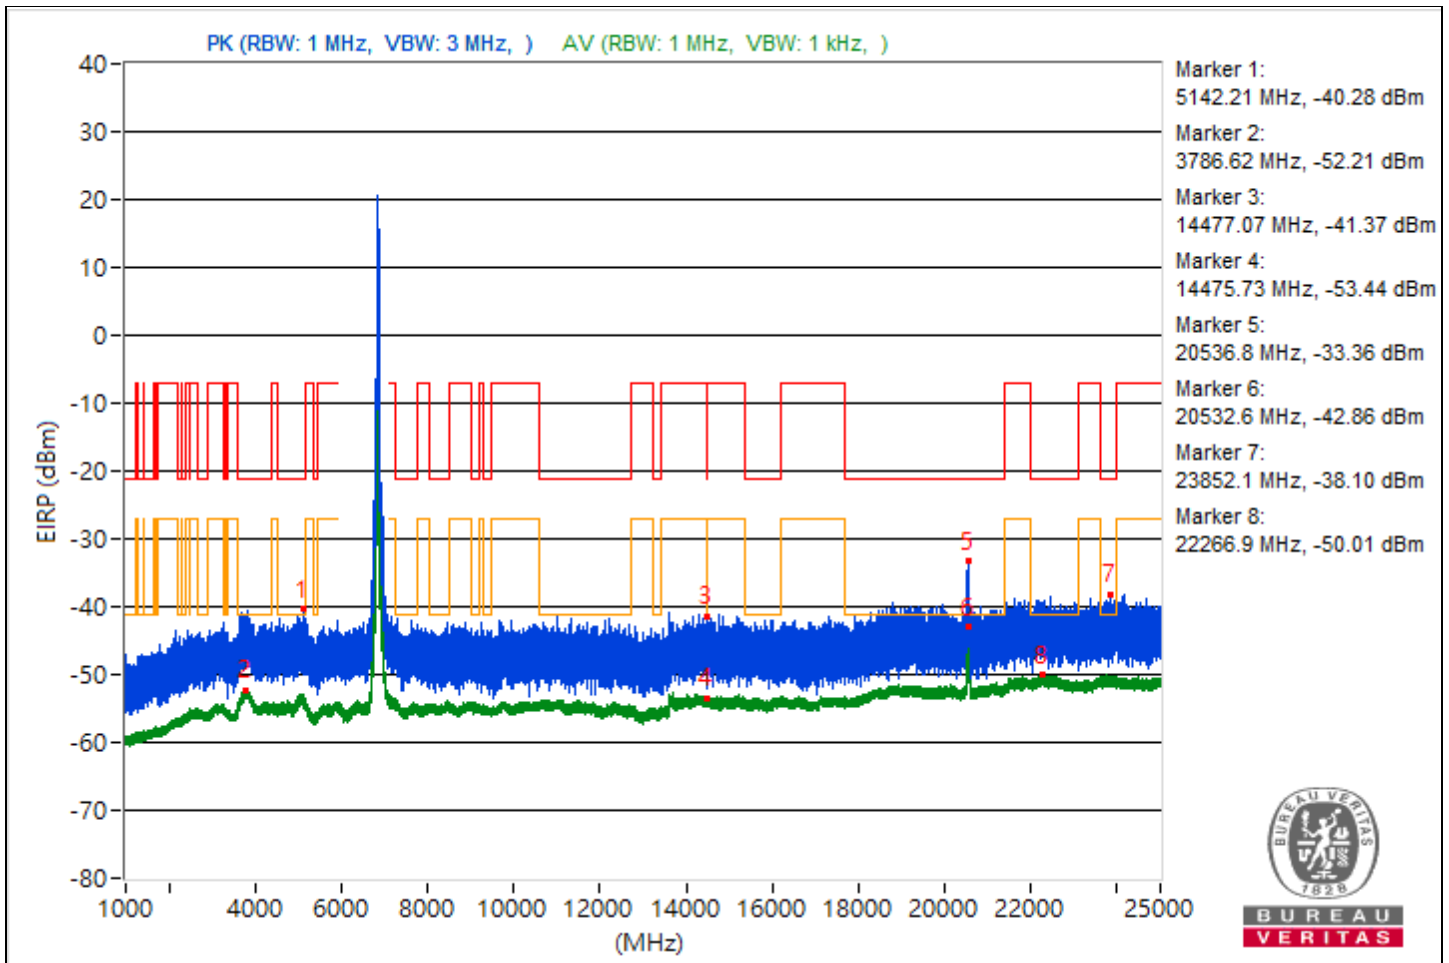

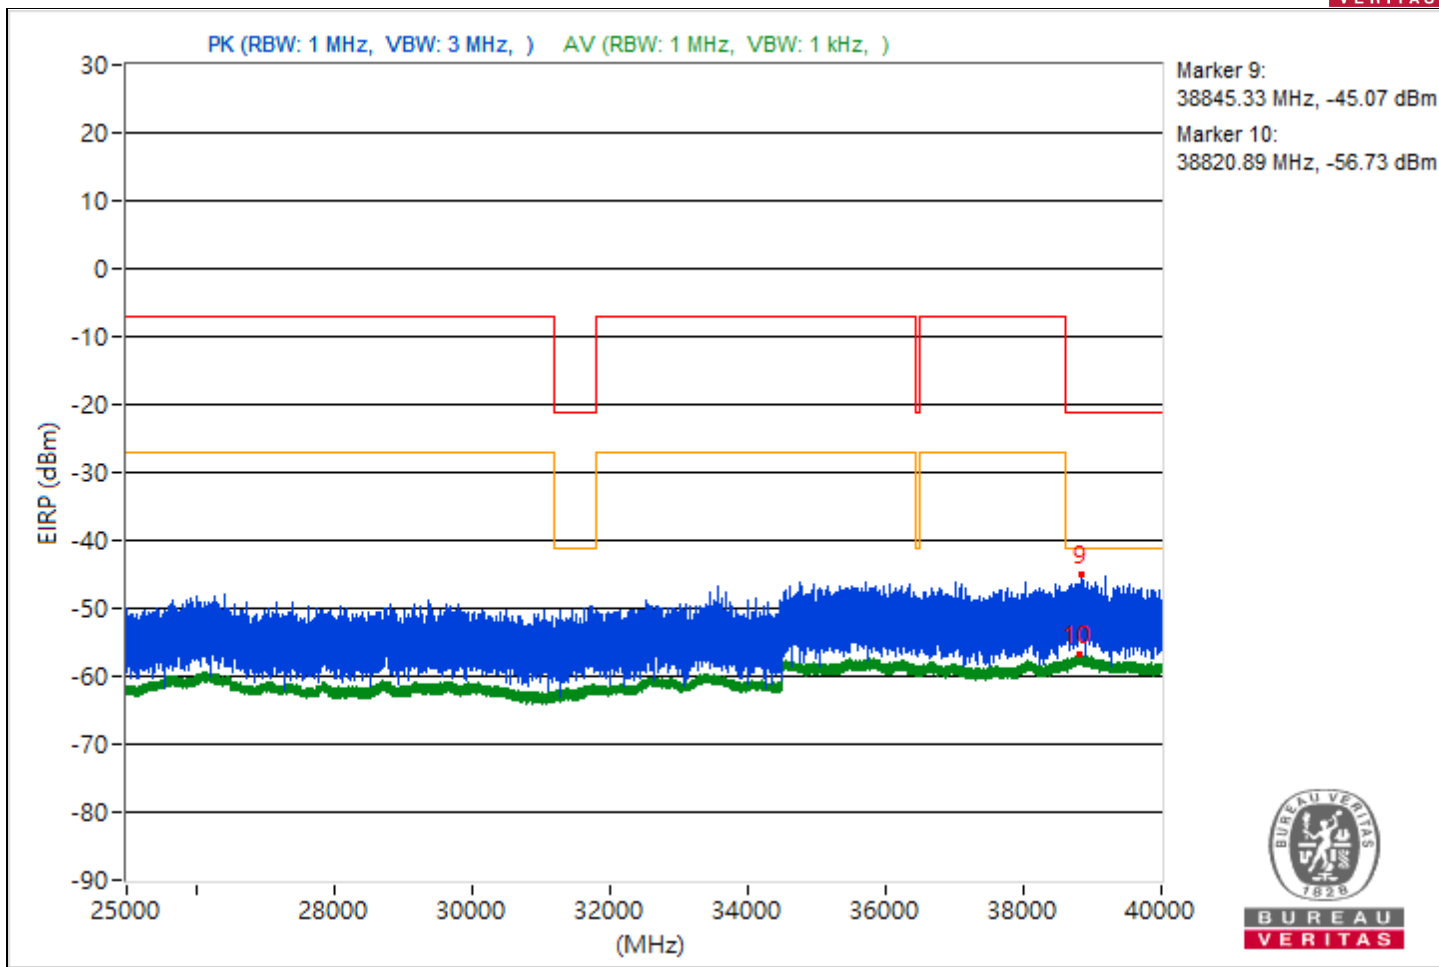





RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5866.01	69.47 PK	88.26	-18.79	-30.71	4.92	-25.79
2	3820.92	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	10697.69	53.56 PK	74	-20.44	-46.62	4.92	-41.7
4	14499.56	41.96 AV	54	-12.04	-58.22	4.92	-53.3
5	17940.1	58.63 PK	74	-15.37	-41.55	4.92	-36.63
6	17947.7	48.73 AV	54	-5.27	-51.45	4.92	-46.53
7	23892.3	56.68 PK	74	-17.32	-43.5	4.92	-38.58
8	22224.9	45.22 AV	54	-8.78	-54.96	4.92	-50.04
9	38998.58	49.62 PK	74	-24.38	-50.56	4.92	-45.64
10	38807.47	38.86 AV	54	-15.14	-61.32	4.92	-56.4

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

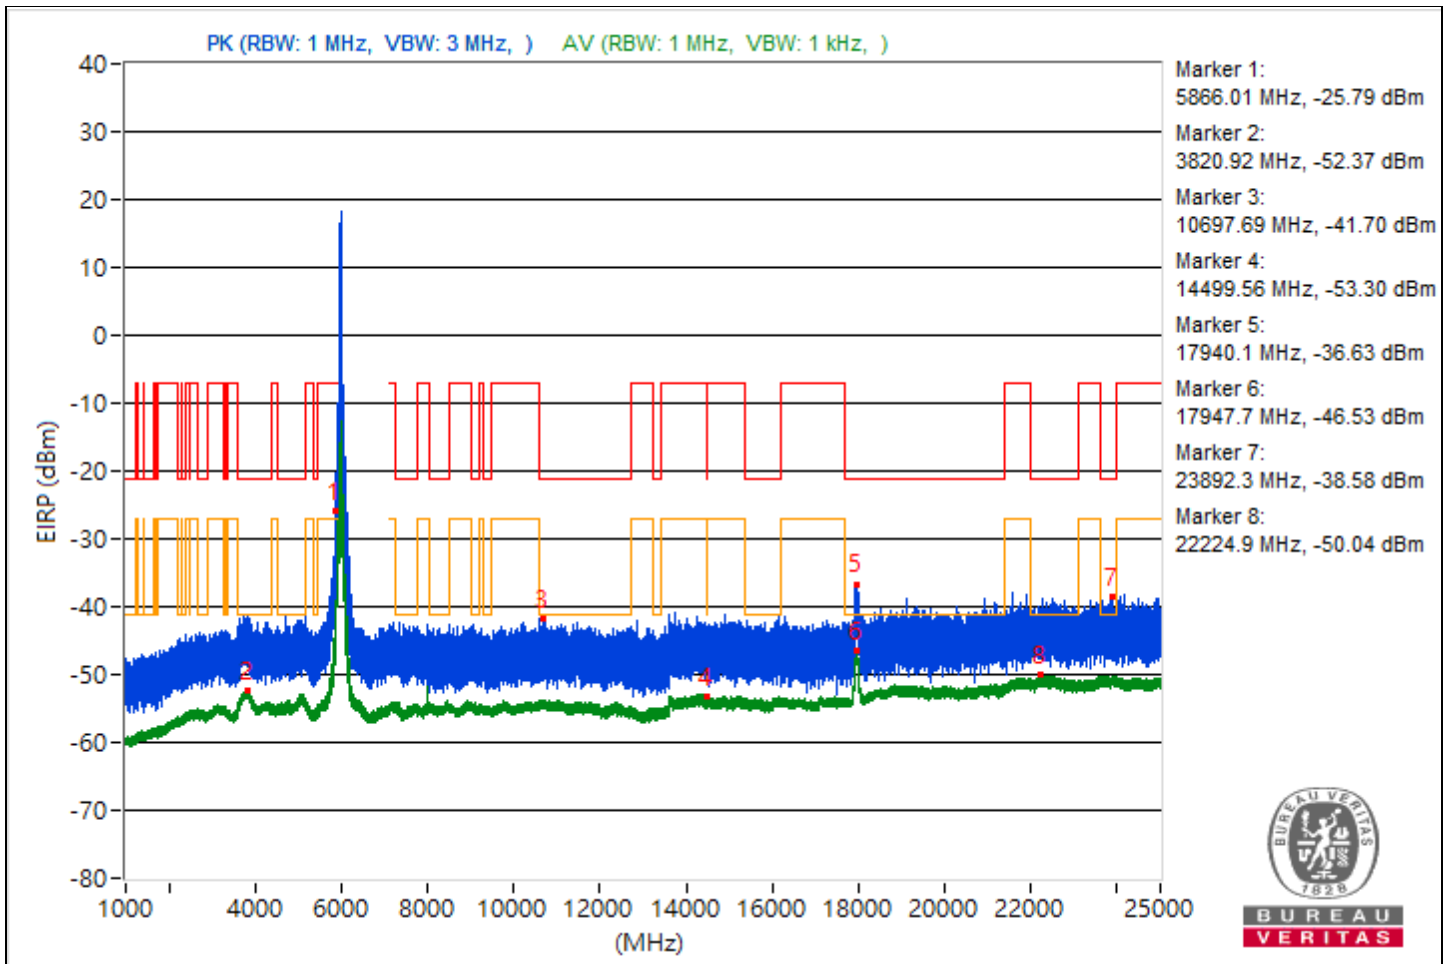

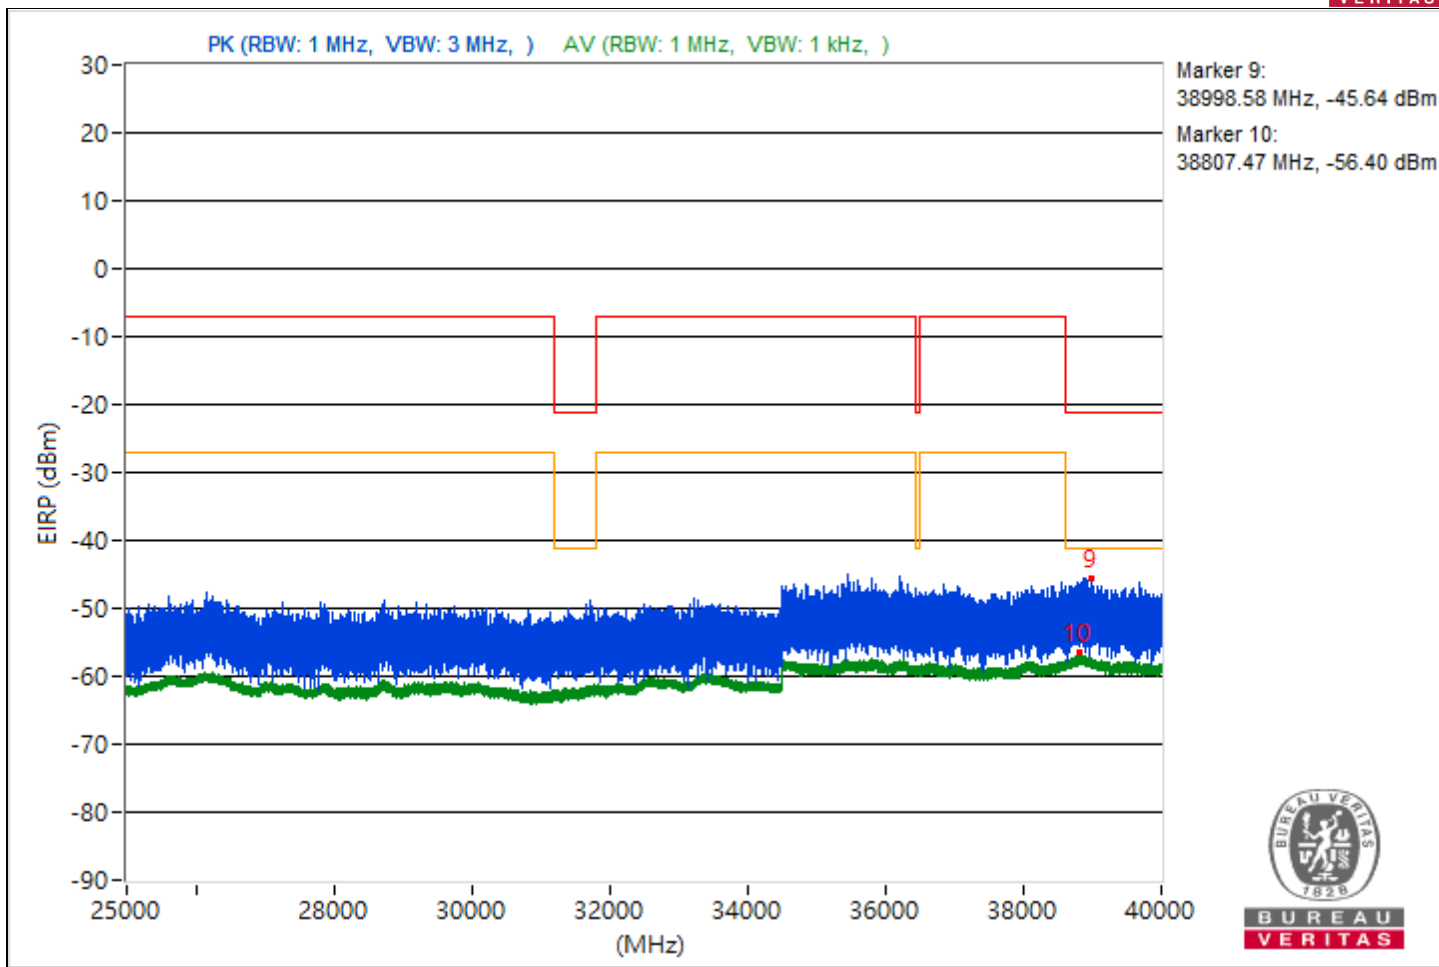





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3863.23	54.34 PK	74	-19.66	-45.84	4.92	-40.92
2	3832.12	43.06 AV	54	-10.94	-57.12	4.92	-52.2
3	15421.96	53.73 PK	74	-20.27	-46.45	4.92	-41.53
4	8193.33	44.29 AV	54	-9.71	-55.89	4.92	-50.97
5	18445.1	58.22 PK	74	-15.78	-41.96	4.92	-37.04
6	18431.3	47.04 AV	54	-6.96	-53.14	4.92	-48.22
7	22610	56.95 PK	74	-17.05	-43.23	4.92	-38.31
8	22280.4	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	39101.87	49.82 PK	74	-24.18	-50.36	4.92	-45.44
10	38835.56	38.66 AV	54	-15.34	-61.52	4.92	-56.6

Note: Margin value = Emission Level - Limit value

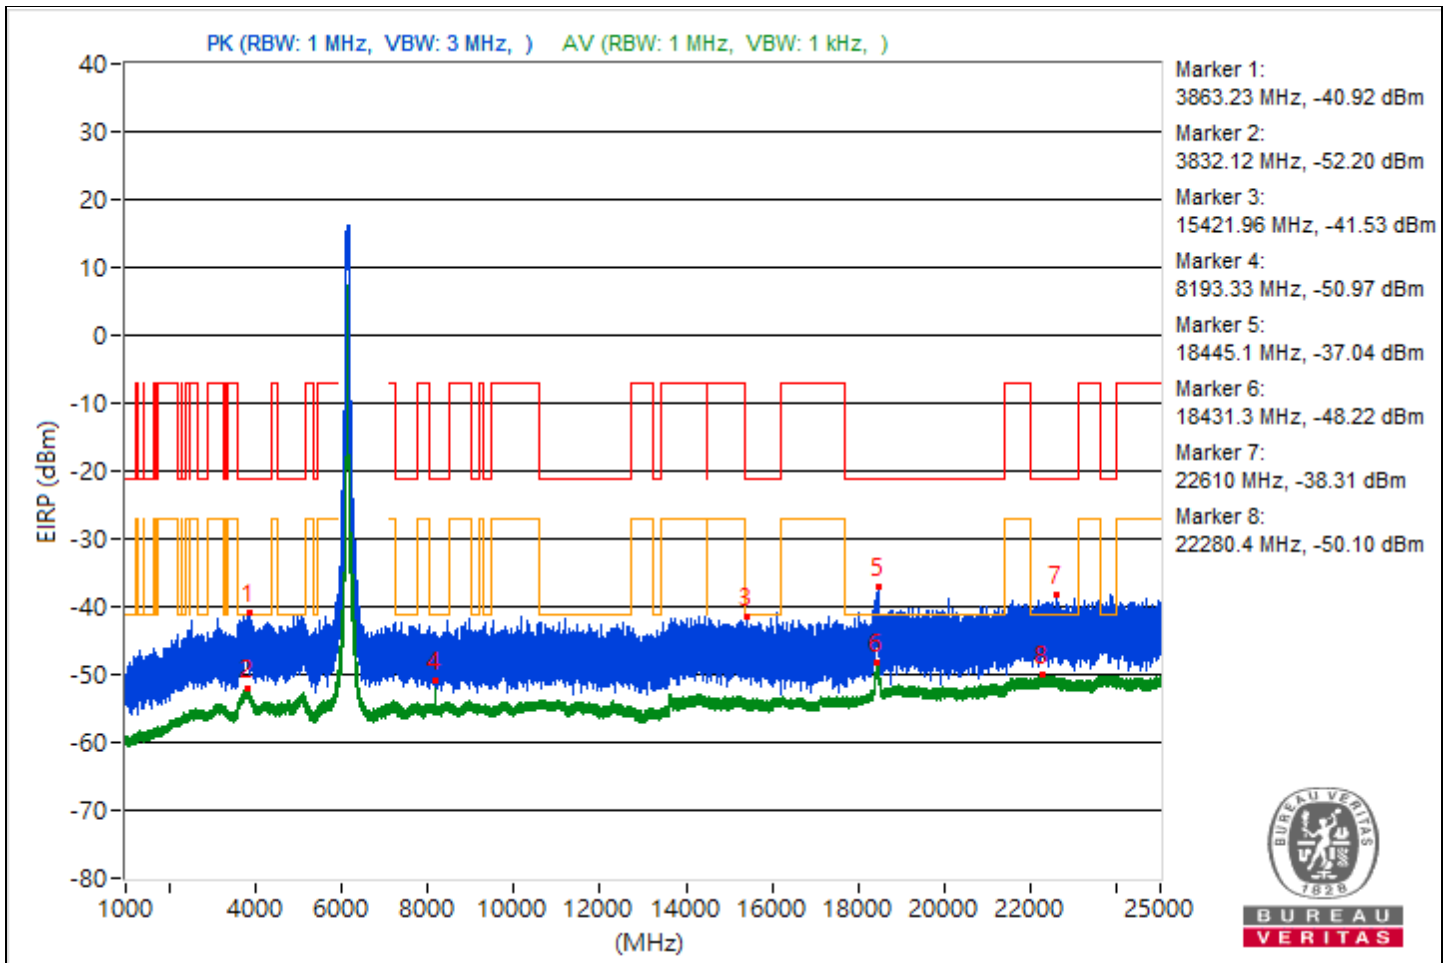

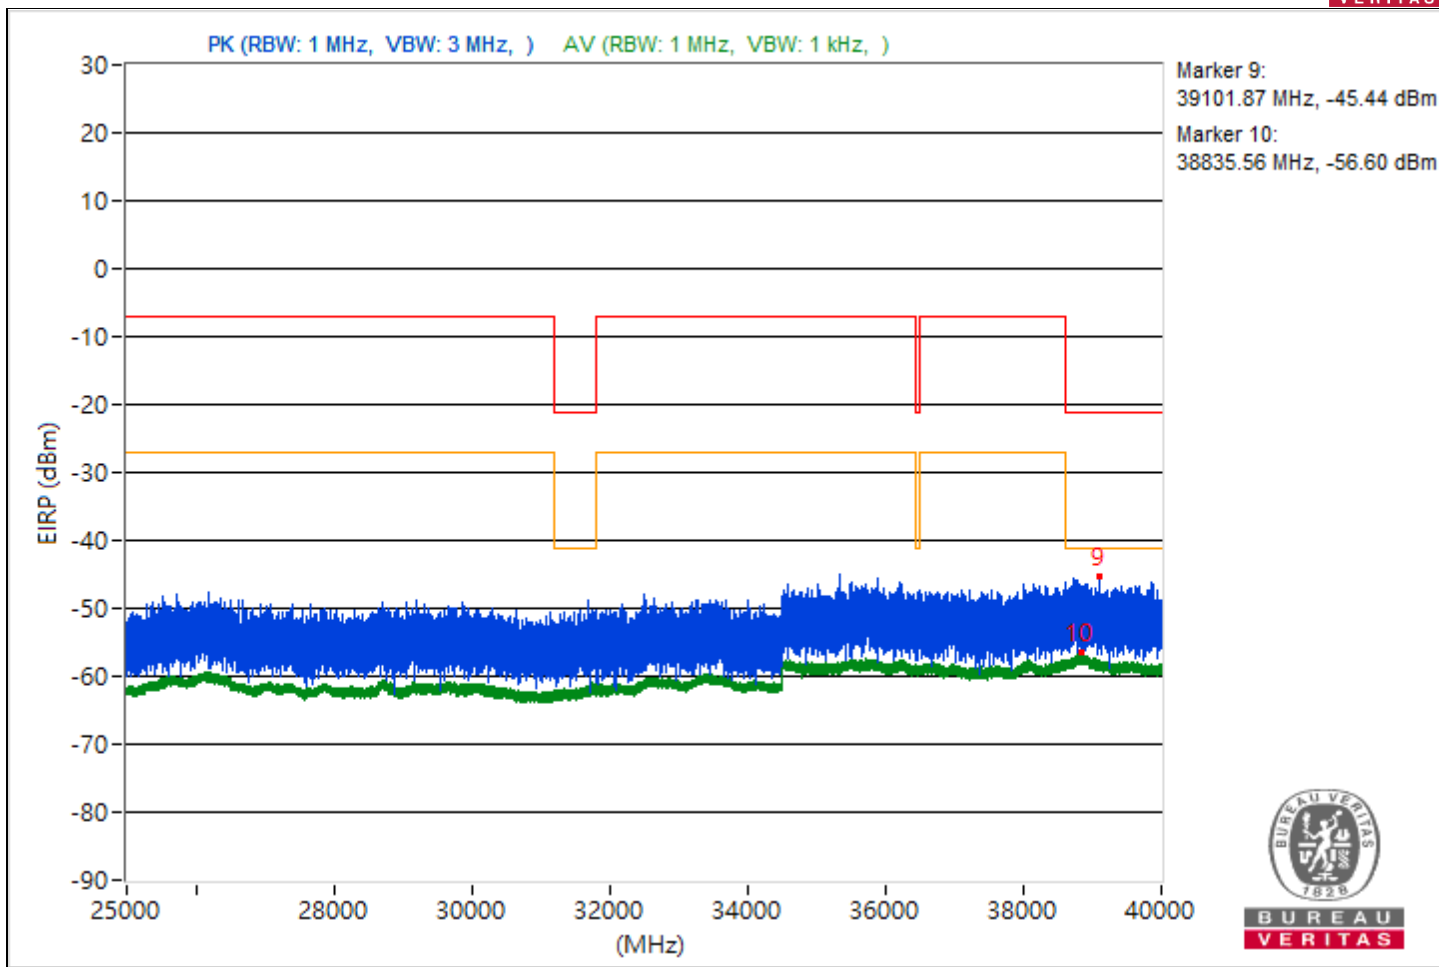





RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3687.46	53.89 PK	74	-20.11	-46.29	4.92	-41.37
2	3788.8	43.05 AV	54	-10.95	-57.13	4.92	-52.21
3	15496.18	53.87 PK	74	-20.13	-46.31	4.92	-41.39
4	14470.76	41.81 AV	54	-12.19	-58.37	4.92	-53.45
5	19176.5	59.26 PK	74	-14.74	-40.92	4.92	-36
6	19156	48.77 AV	54	-5.23	-51.41	4.92	-46.49
7	23730.2	56.97 PK	74	-17.03	-43.21	4.92	-38.29
8	22272.1	45.19 AV	54	-8.81	-54.99	4.92	-50.07
9	38673.69	50.64 PK	74	-23.36	-49.54	4.92	-44.62
10	38846.84	38.48 AV	54	-15.52	-61.7	4.92	-56.78

Note: Margin value = Emission Level - Limit value

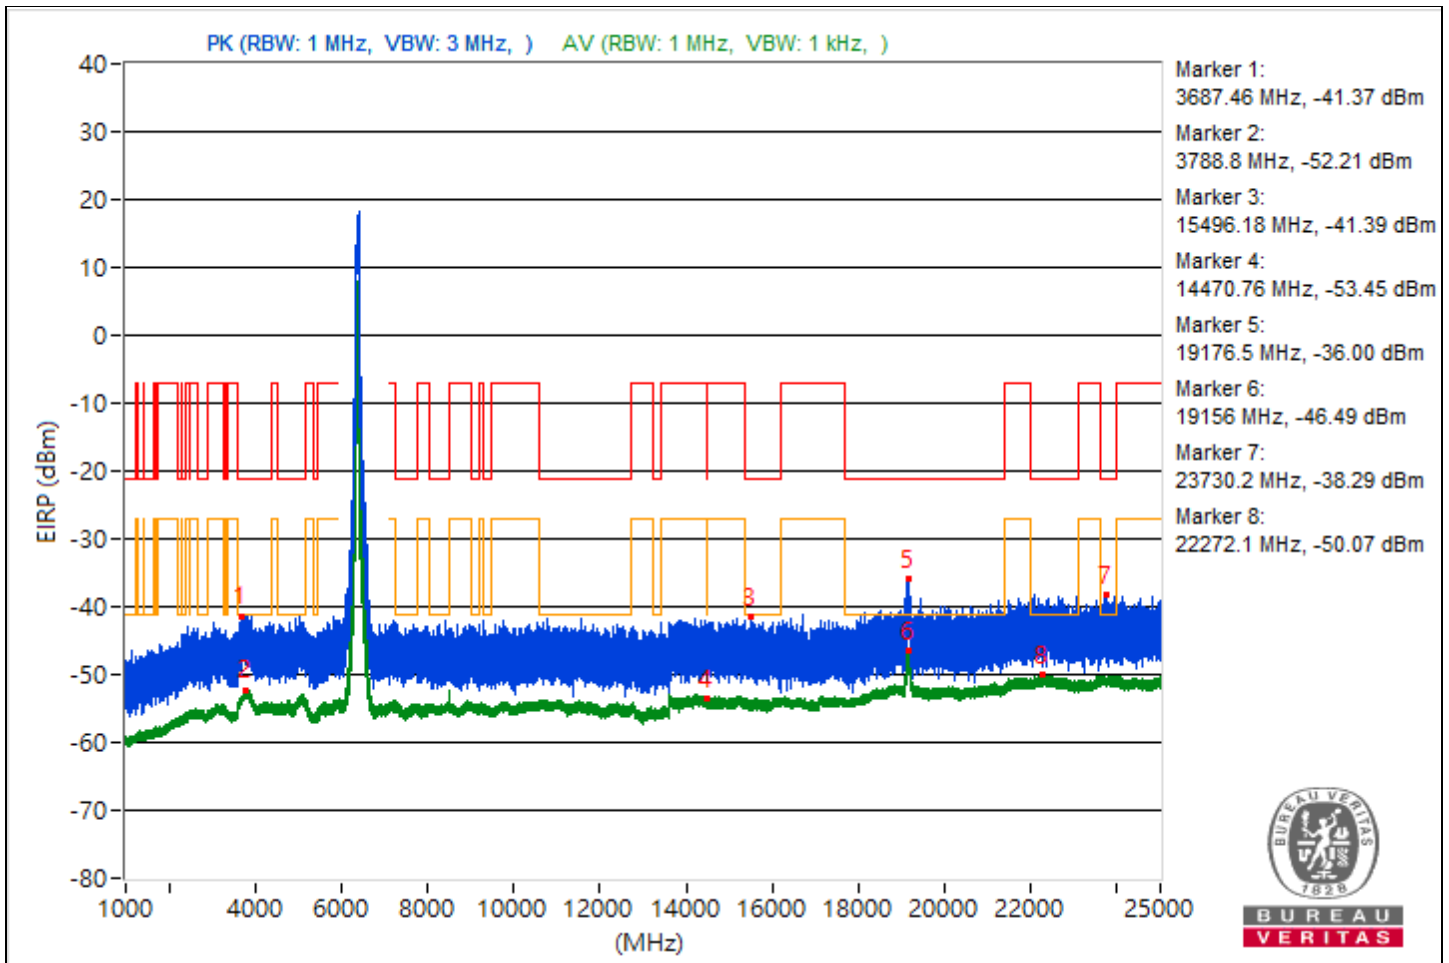

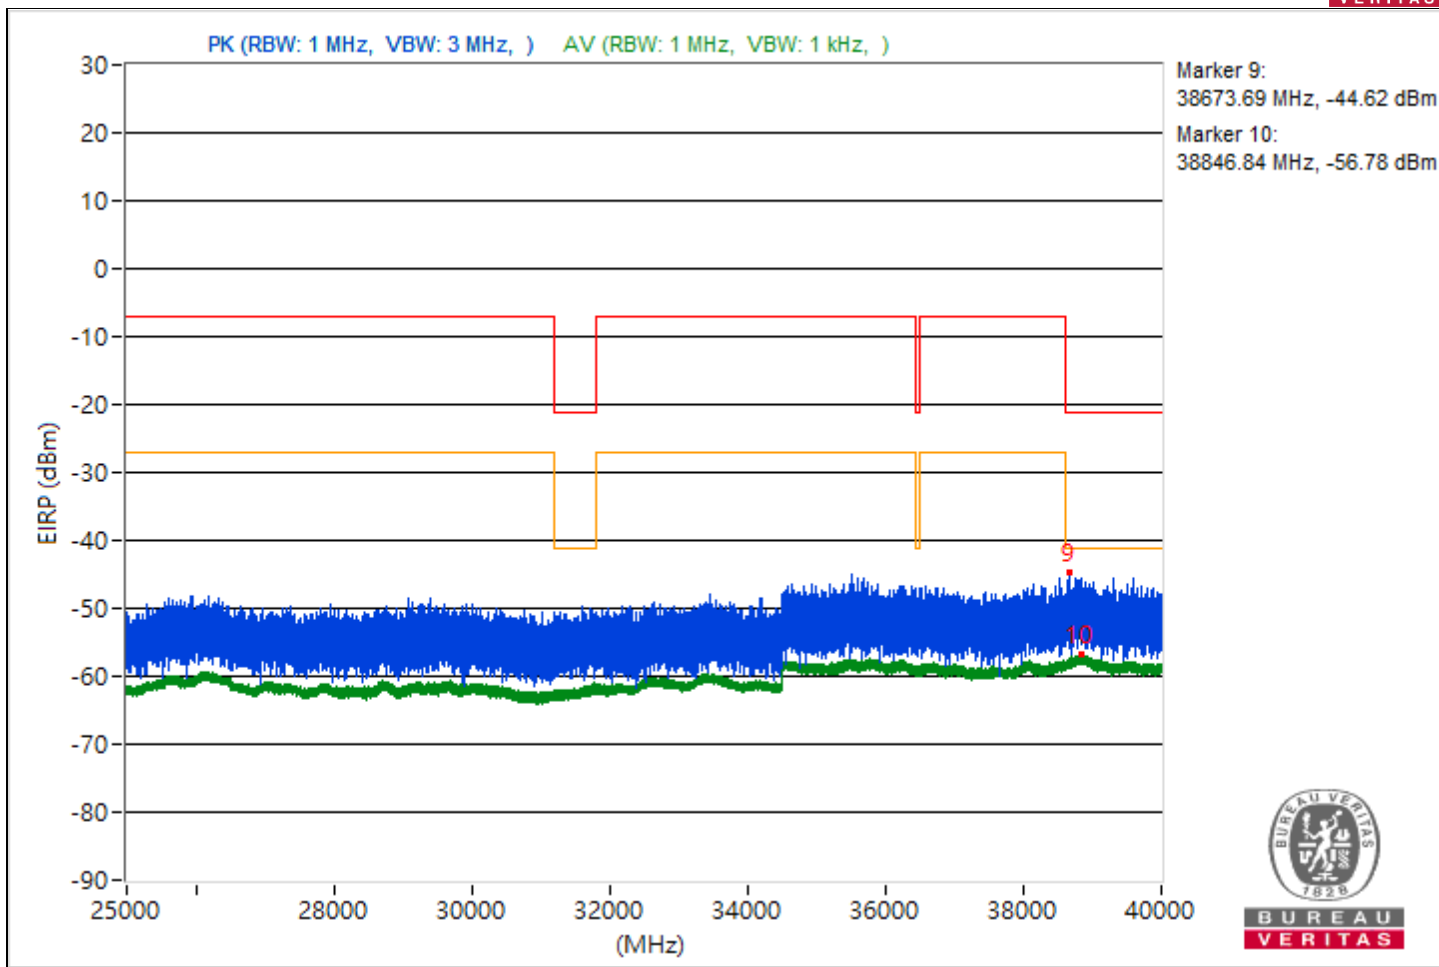





RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.72	54.68 PK	74	-19.32	-45.5	4.92	-40.58
2	3790.59	43.11 AV	54	-10.89	-57.07	4.92	-52.15
3	8103.82	53.29 PK	74	-20.71	-46.89	4.92	-41.97
4	14477.96	42.03 AV	54	-11.97	-58.15	4.92	-53.23
5	19344.9	57.15 PK	74	-16.85	-43.03	4.92	-38.11
6	19397.5	47.05 AV	54	-6.95	-53.13	4.92	-48.21
7	22272.3	56.8 PK	74	-17.2	-43.38	4.92	-38.46
8	22366.5	45.17 AV	54	-8.83	-55.01	4.92	-50.09
9	38728.36	50.62 PK	74	-23.38	-49.56	4.92	-44.64
10	38812.62	38.59 AV	54	-15.41	-61.59	4.92	-56.67

Note: Margin value = Emission Level - Limit value

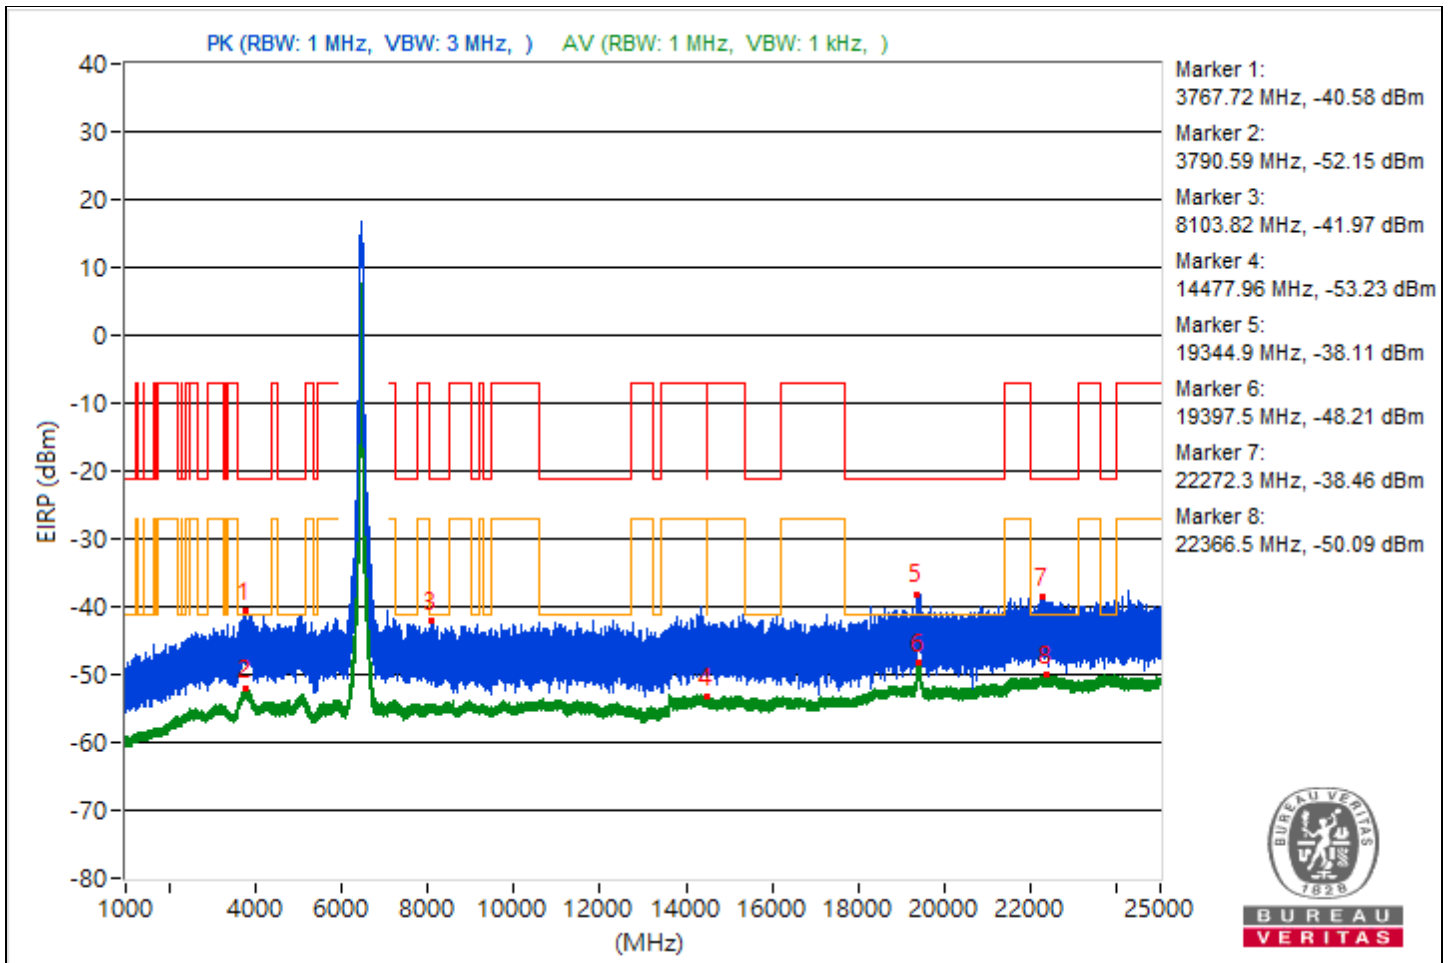

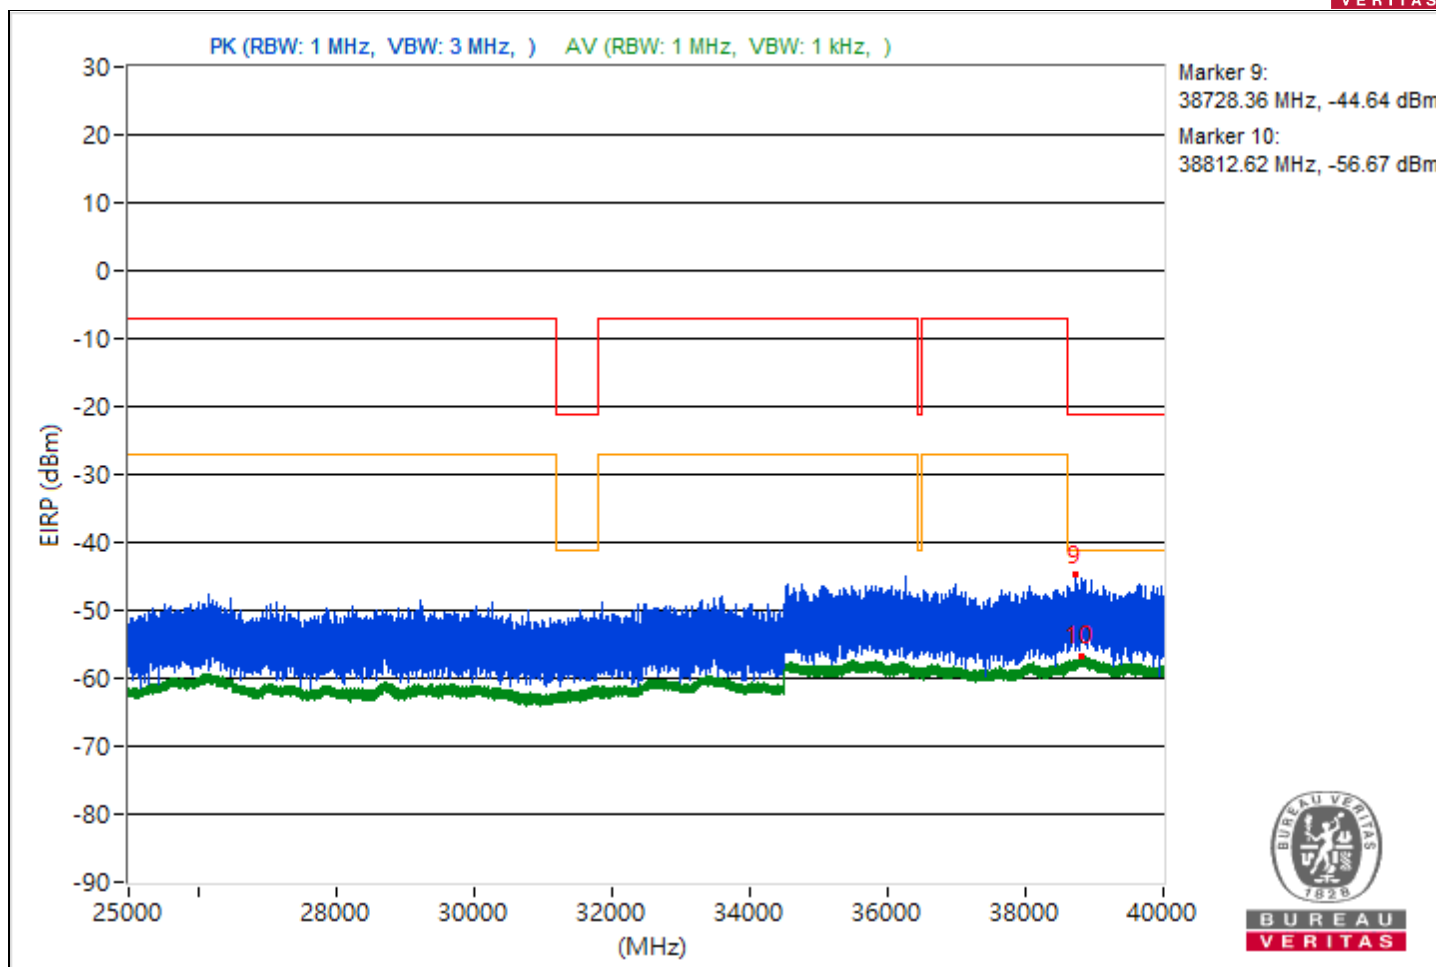





RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.46	53.98 PK	74	-20.02	-46.2	4.92	-41.28
2	3804.51	43.04 AV	54	-10.96	-57.14	4.92	-52.22
3	10747.02	54.51 PK	74	-19.49	-45.67	4.92	-40.75
4	14488	41.95 AV	54	-12.05	-58.23	4.92	-53.31
5	20073.2	56.46 PK	74	-17.54	-43.72	4.92	-38.8
6	20125.1	45.25 AV	54	-8.75	-54.93	4.92	-50.01
7	23969.2	57.23 PK	74	-16.77	-42.95	4.92	-38.03
8	22232.9	45.18 AV	54	-8.82	-55	4.92	-50.08
9	39962.31	49.47 PK	74	-24.53	-50.71	4.92	-45.79
10	38806.76	38.41 AV	54	-15.59	-61.77	4.92	-56.85

Note: Margin value = Emission Level - Limit value

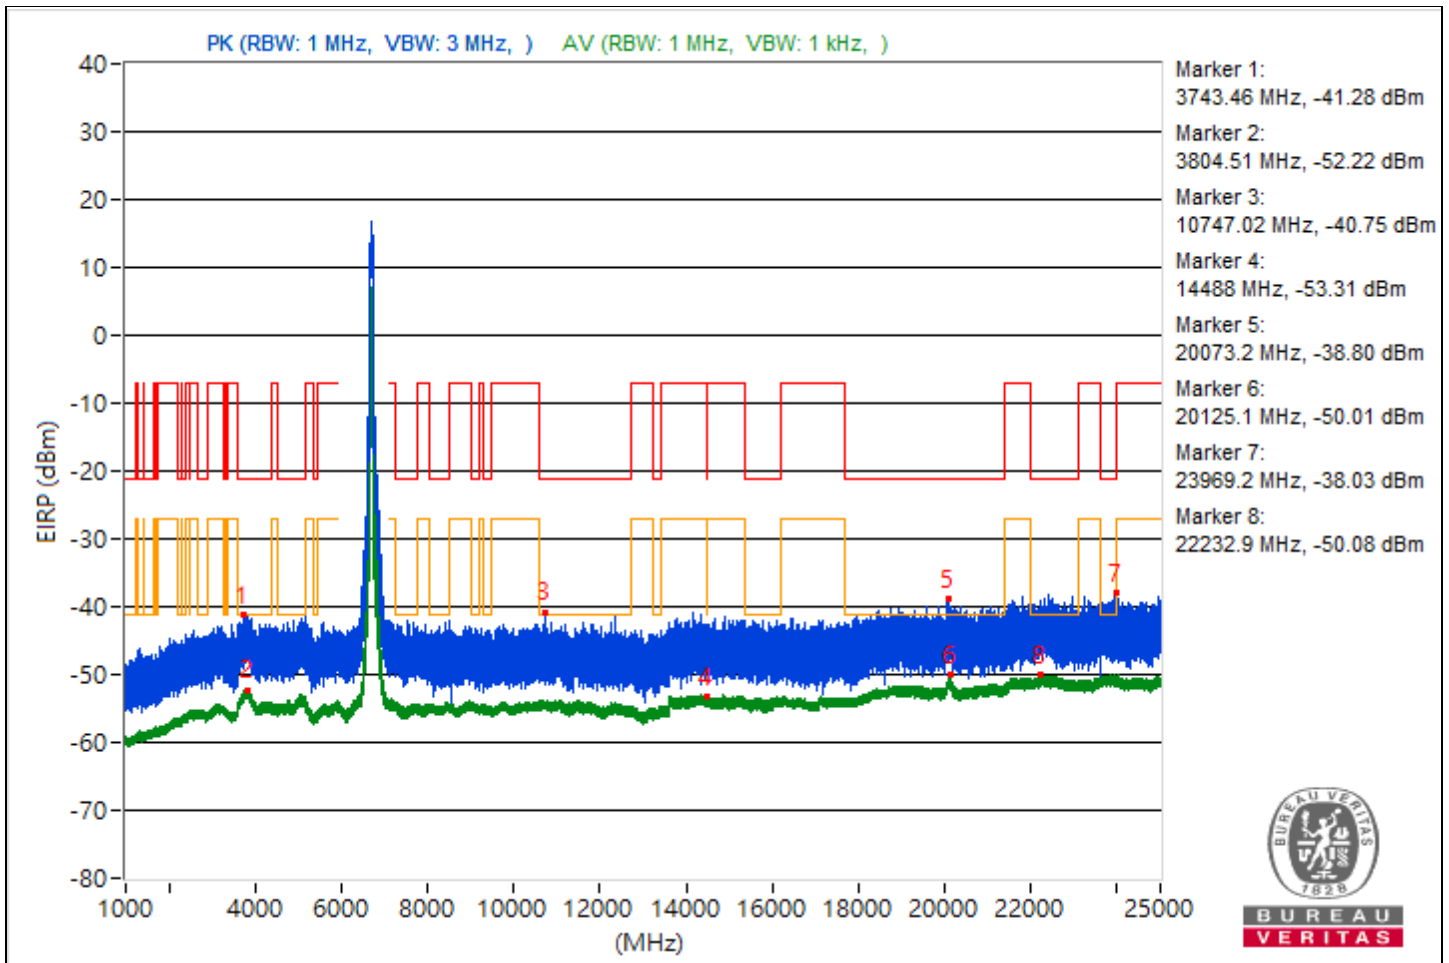

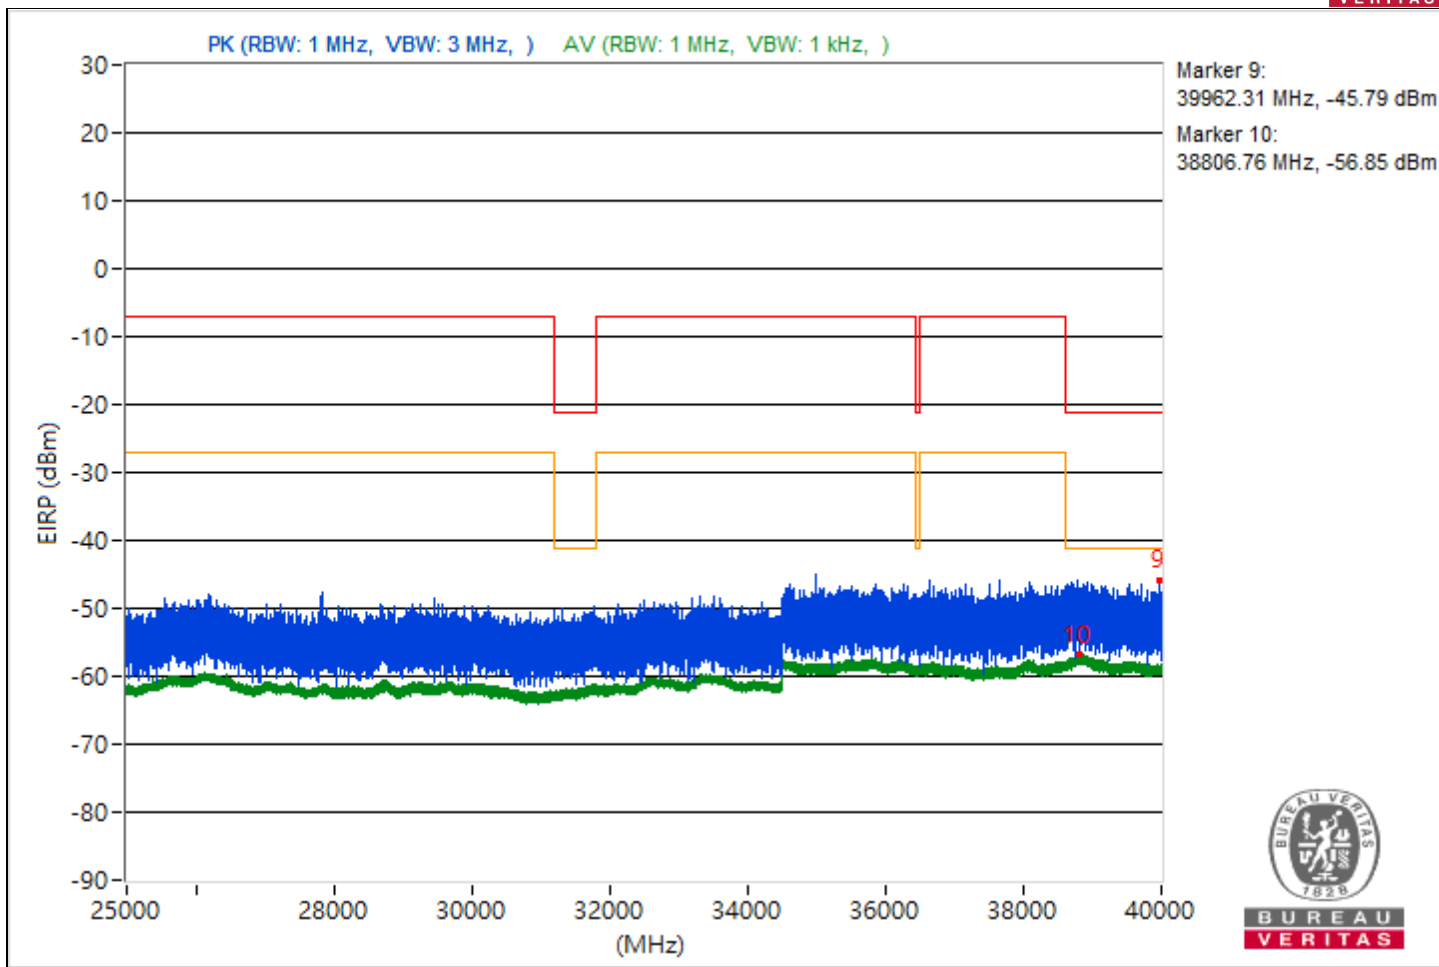





RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5064.28	54.3 PK	74	-19.7	-45.88	4.92	-40.96
2	3773.87	42.94 AV	54	-11.06	-57.24	4.92	-52.32
3	11351.47	53.75 PK	74	-20.25	-46.43	4.92	-41.51
4	14481.24	41.84 AV	54	-12.16	-58.34	4.92	-53.42
5	21160.9	56.11 PK	74	-17.89	-44.07	4.92	-39.15
6	20601.9	45.7 AV	54	-8.3	-54.48	4.92	-49.56
7	23981.6	56.32 PK	74	-17.68	-43.86	4.92	-38.94
8	22481.5	45.22 AV	54	-8.78	-54.96	4.92	-50.04
9	38689.69	50.46 PK	74	-23.54	-49.72	4.92	-44.8
10	38785.24	38.41 AV	54	-15.59	-61.77	4.92	-56.85

Note: Margin value = Emission Level - Limit value

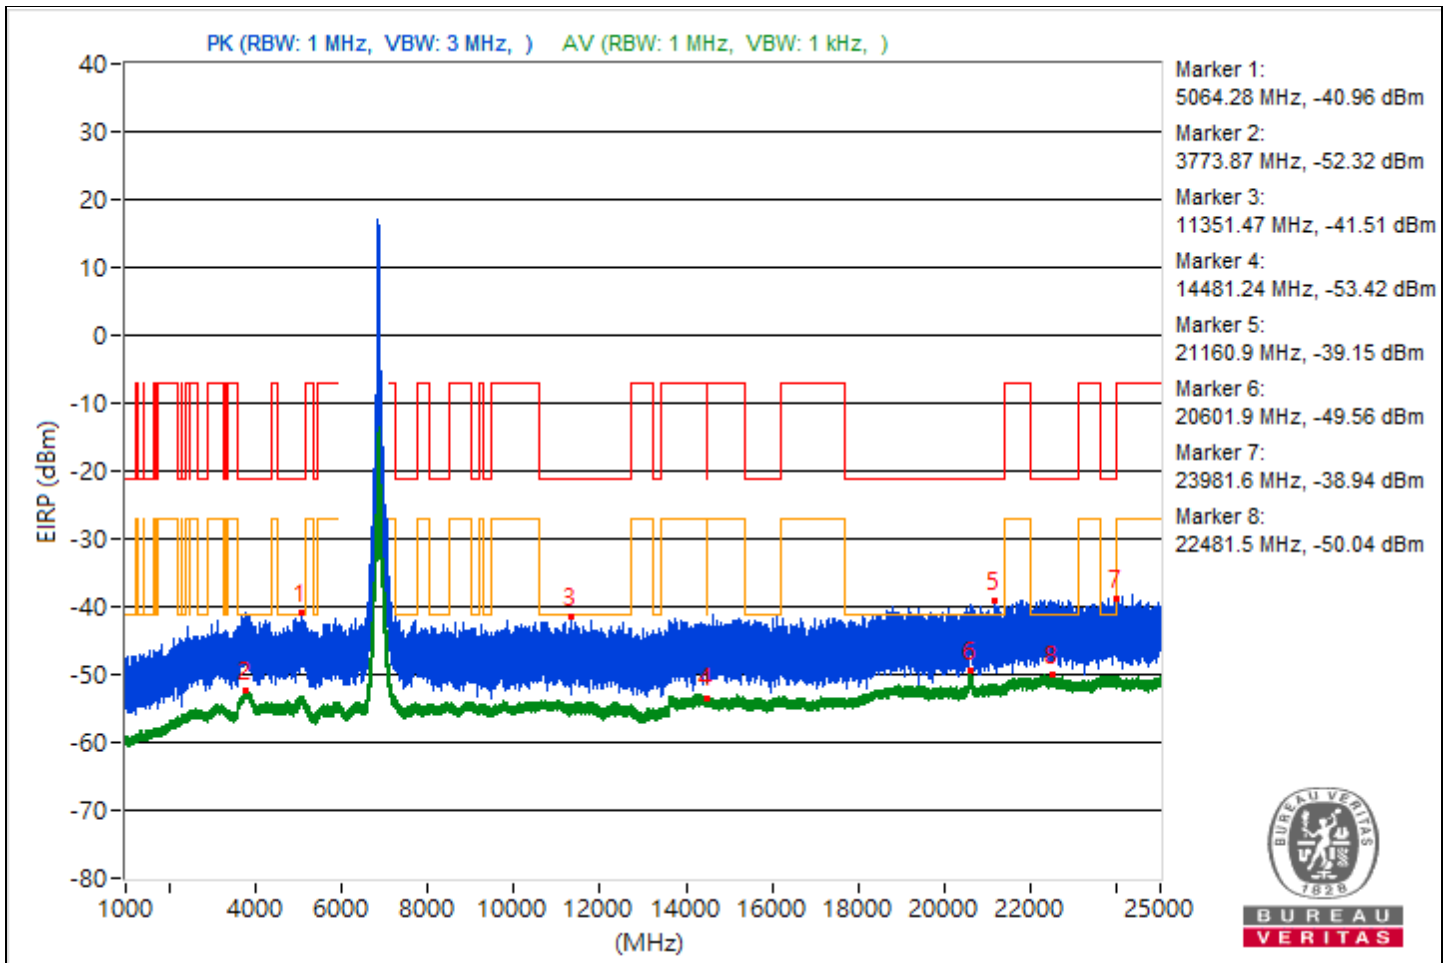

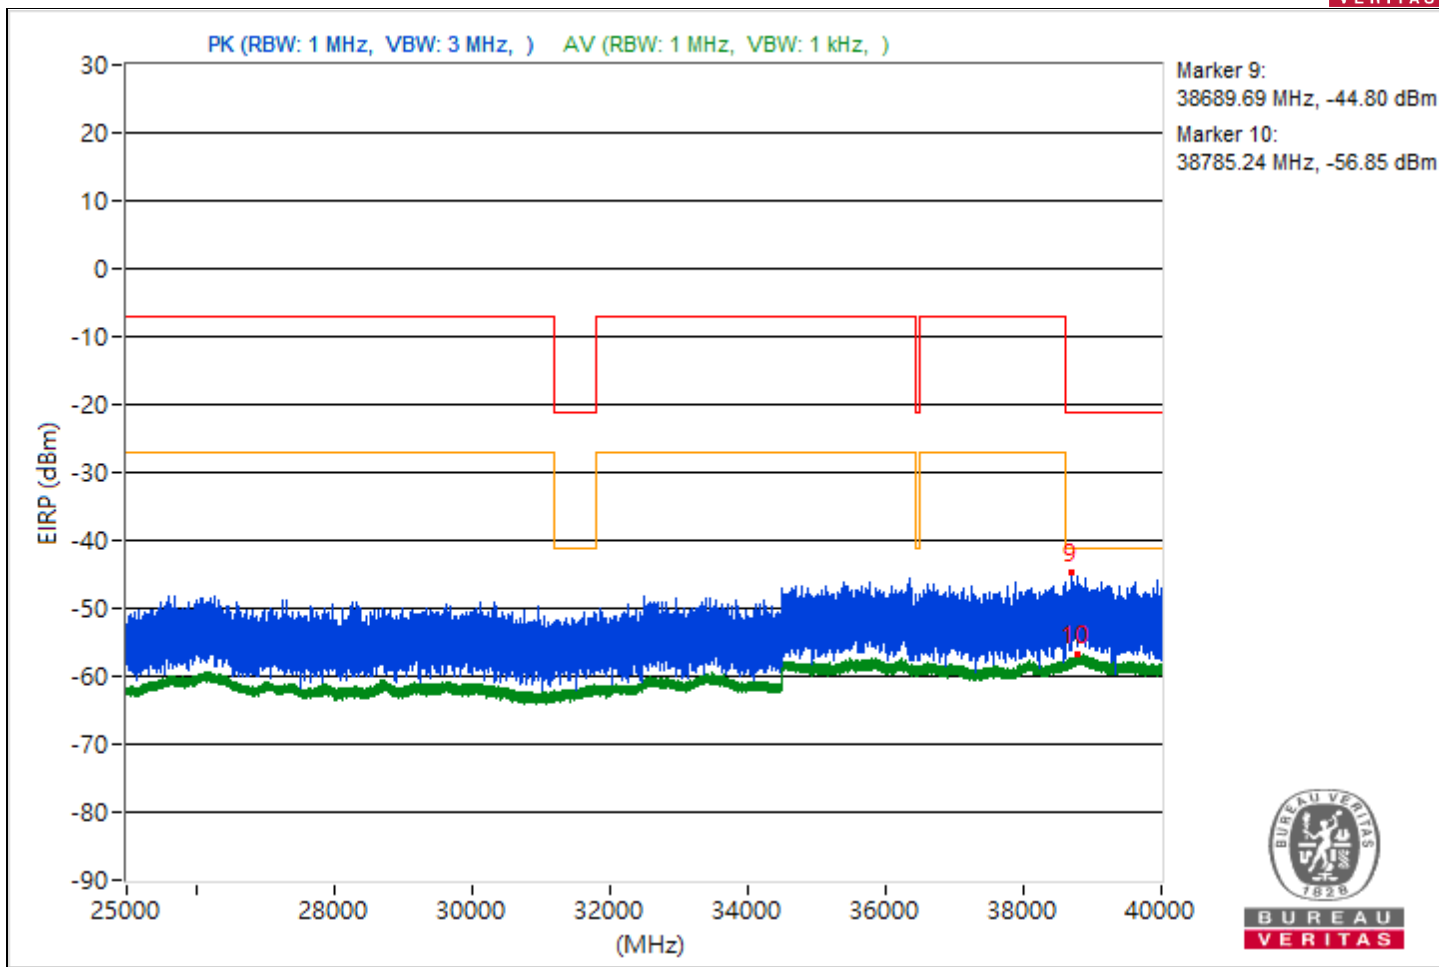





RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5867.41	72.01 PK	88.26	-16.25	-28.17	4.92	-23.25
2	#5871.84	60.72 AV	68.26	-7.54	-39.46	4.92	-34.54
3	10762.13	54.31 PK	74	-19.69	-45.87	4.92	-40.95
4	8033.33	46.46 AV	54	-7.54	-53.72	4.92	-48.8
5	21015.6	55.53 PK	74	-18.47	-44.65	4.92	-39.73
6	21115.6	43.86 AV	54	-10.14	-56.32	4.92	-51.4
7	23826.2	56.77 PK	74	-17.23	-43.41	4.92	-38.49
8	22291.6	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	39222.4	49.39 PK	74	-24.61	-50.79	4.92	-45.87
10	38838.31	38.45 AV	54	-15.55	-61.73	4.92	-56.81

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

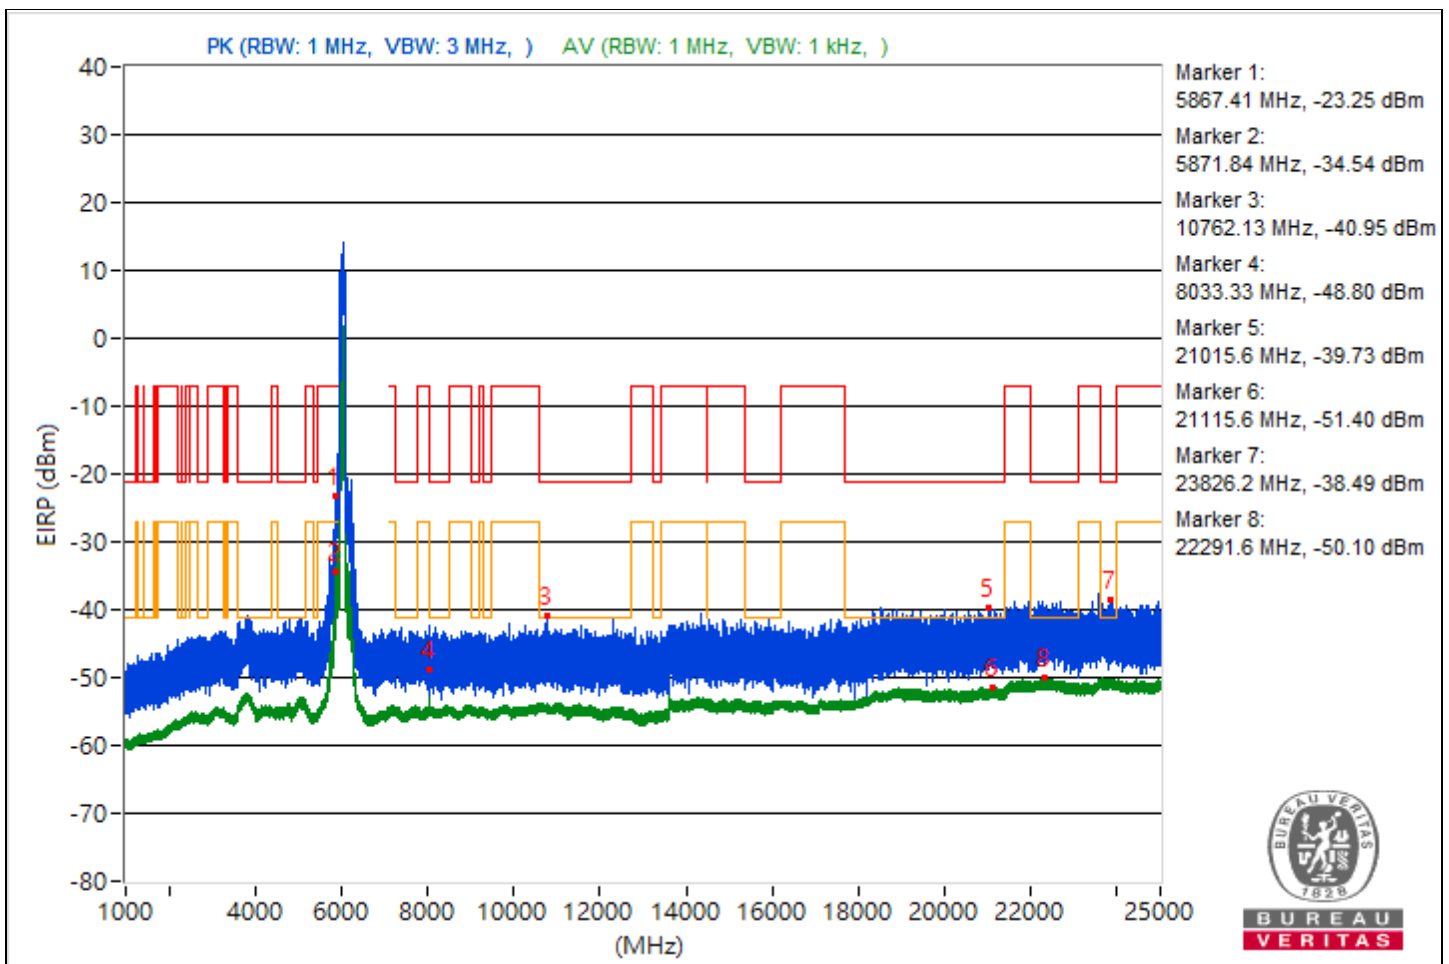

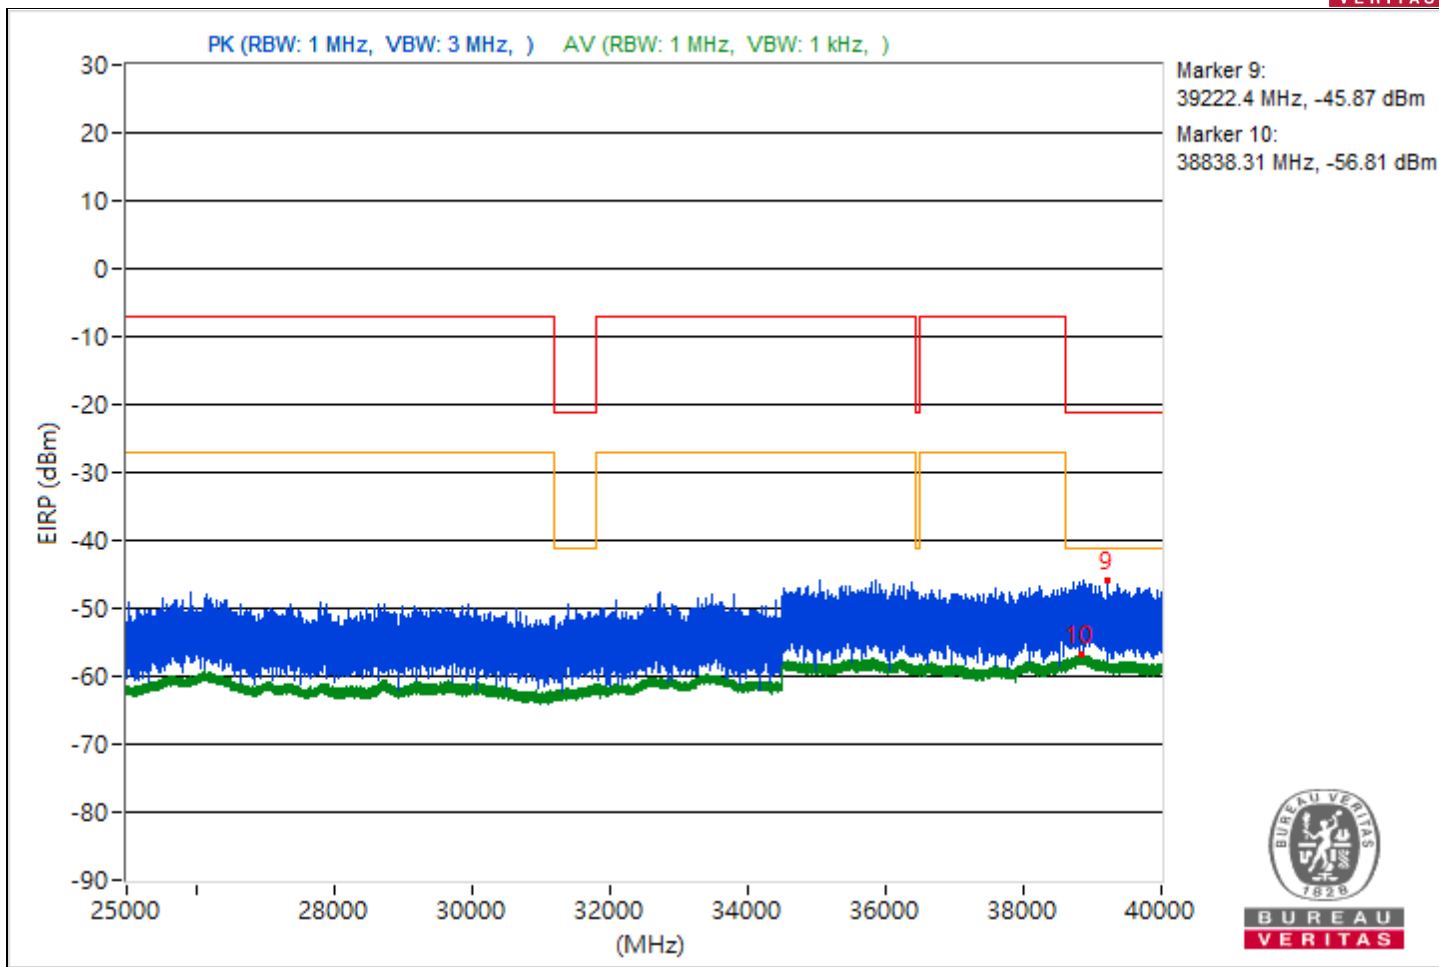





RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3906.17	54.88 PK	74	-19.12	-45.3	4.92	-40.38
2	3814.54	42.87 AV	54	-11.13	-57.31	4.92	-52.39
3	11020.27	54.15 PK	74	-19.85	-46.03	4.92	-41.11
4	8246.76	45.18 AV	54	-8.82	-55	4.92	-50.08
5	19952.9	55.98 PK	74	-18.02	-44.2	4.92	-39.28
6	21117.1	43.8 AV	54	-10.2	-56.38	4.92	-51.46
7	23983.8	57.57 PK	74	-16.43	-42.61	4.92	-37.69
8	22223.7	45.19 AV	54	-8.81	-54.99	4.92	-50.07
9	38857.51	50.2 PK	74	-23.8	-49.98	4.92	-45.06
10	38817.33	38.6 AV	54	-15.4	-61.58	4.92	-56.66

Note: Margin value = Emission Level - Limit value

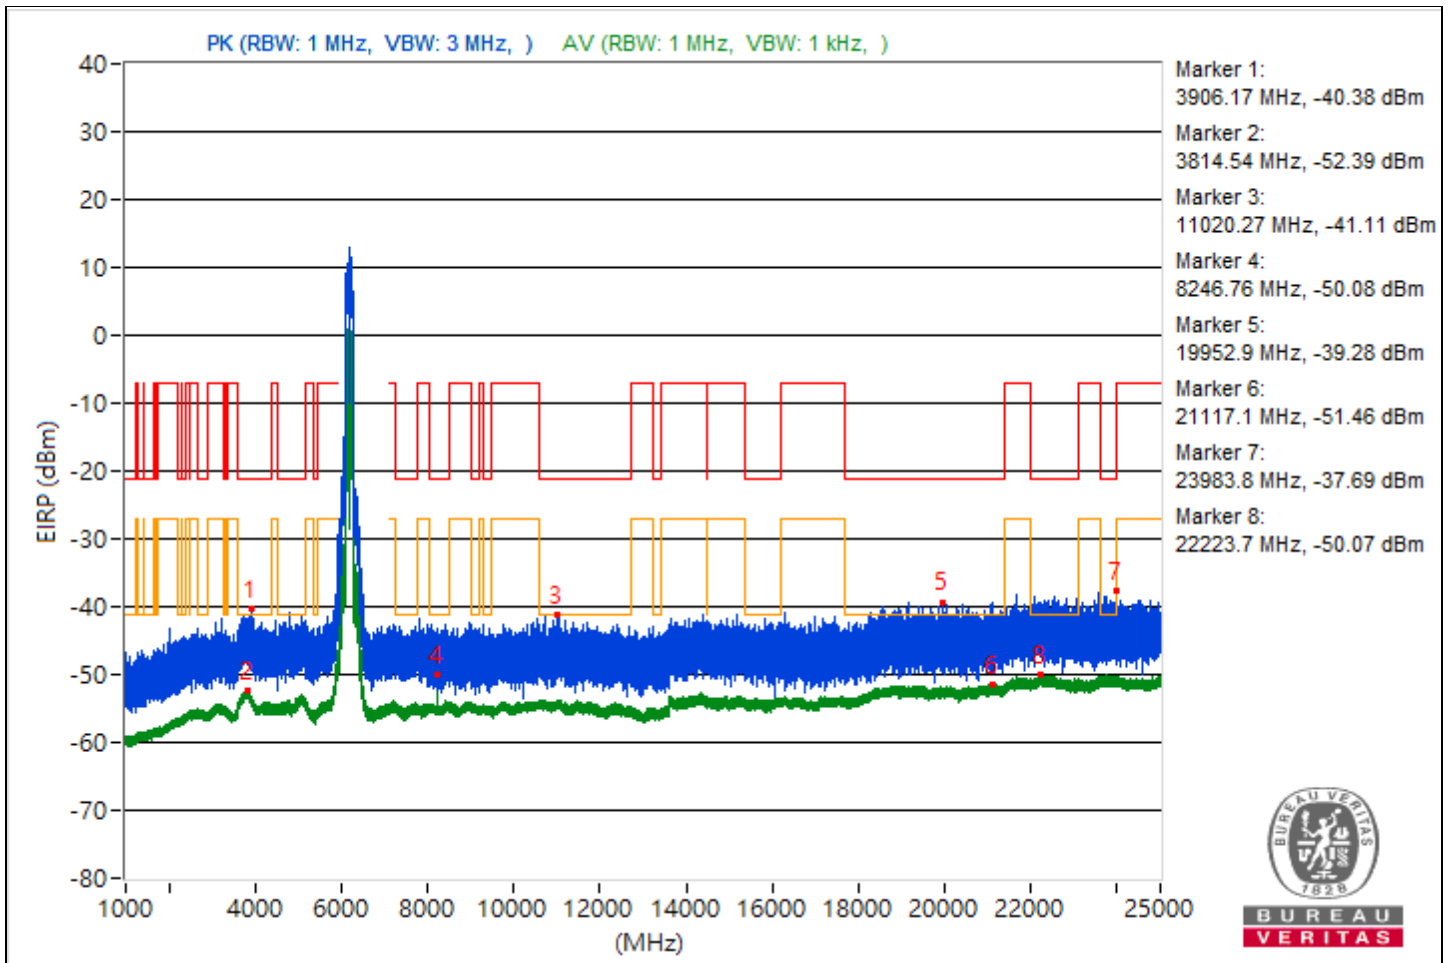

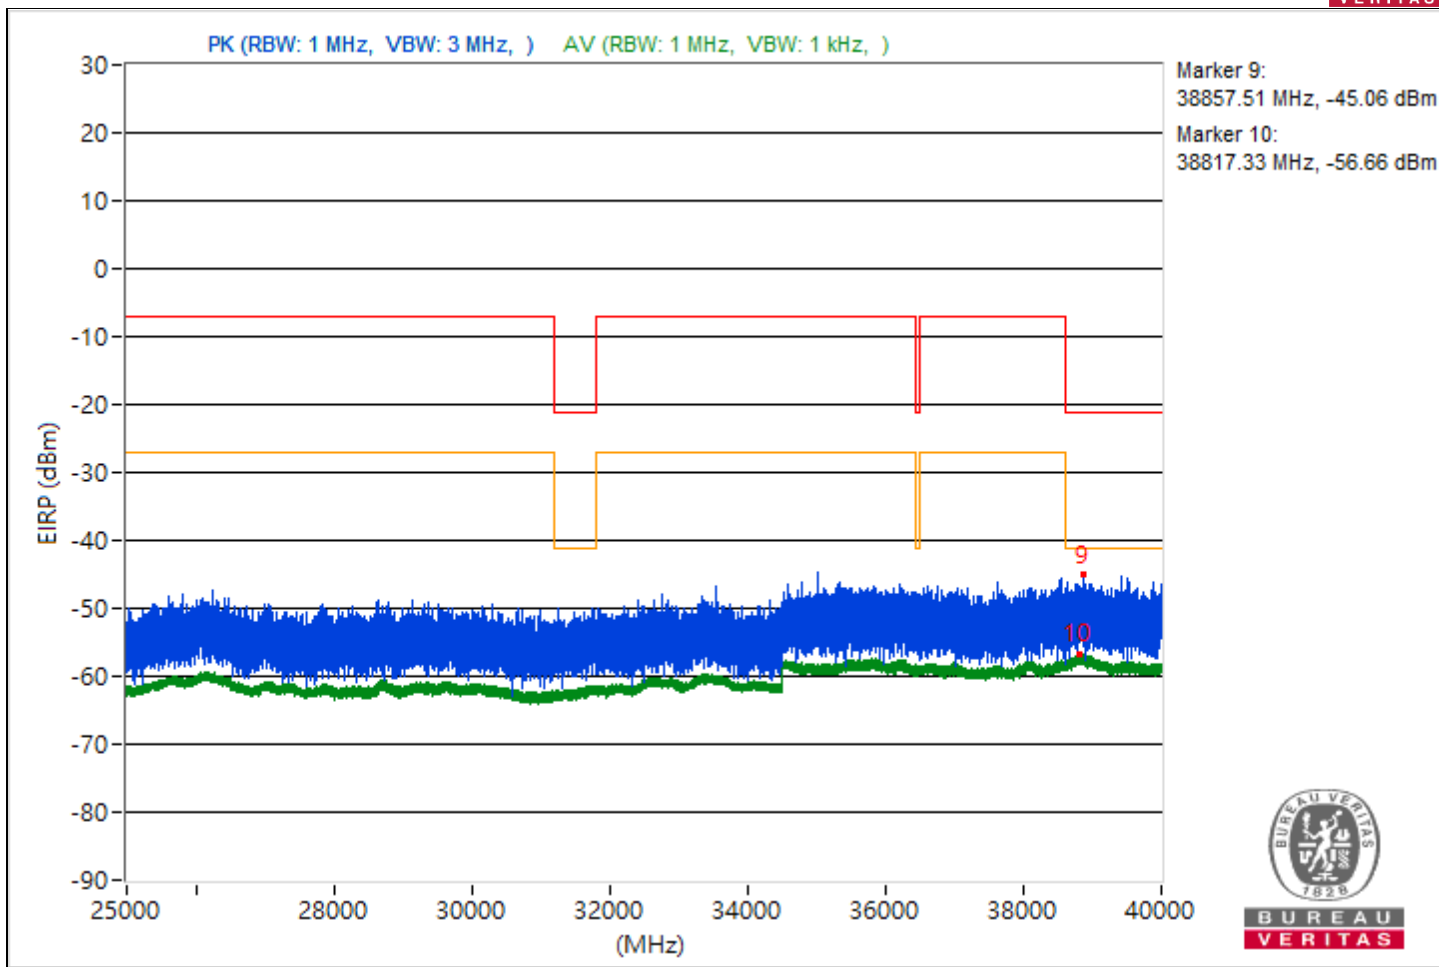





RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.76	54 PK	74	-20	-46.18	4.92	-41.26
2	3811.51	43.13 AV	54	-10.87	-57.05	4.92	-52.13
3	14491.38	54.1 PK	74	-19.9	-46.08	4.92	-41.16
4	8460	44.7 AV	54	-9.3	-55.48	4.92	-50.56
5	19256.6	55.86 PK	74	-18.14	-44.32	4.92	-39.4
6	21200.3	43.9 AV	54	-10.1	-56.28	4.92	-51.36
7	22872	57.11 PK	74	-16.89	-43.07	4.92	-38.15
8	23675.9	45.21 AV	54	-8.79	-54.97	4.92	-50.05
9	38828.89	50.53 PK	74	-23.47	-49.65	4.92	-44.73
10	38777.96	38.43 AV	54	-15.57	-61.75	4.92	-56.83

Note: Margin value = Emission Level - Limit value

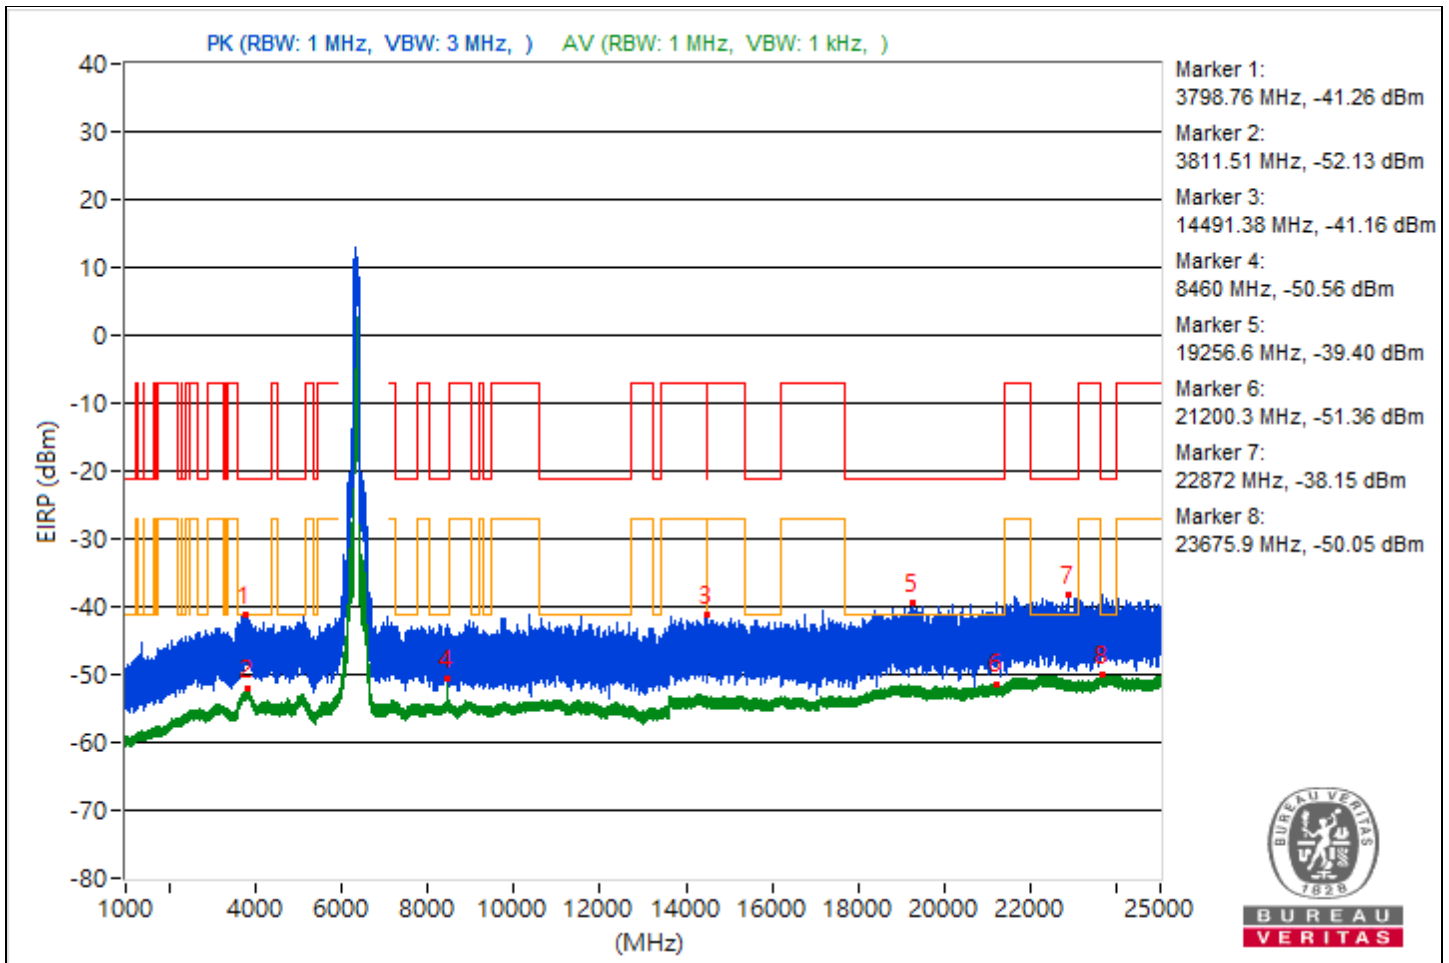

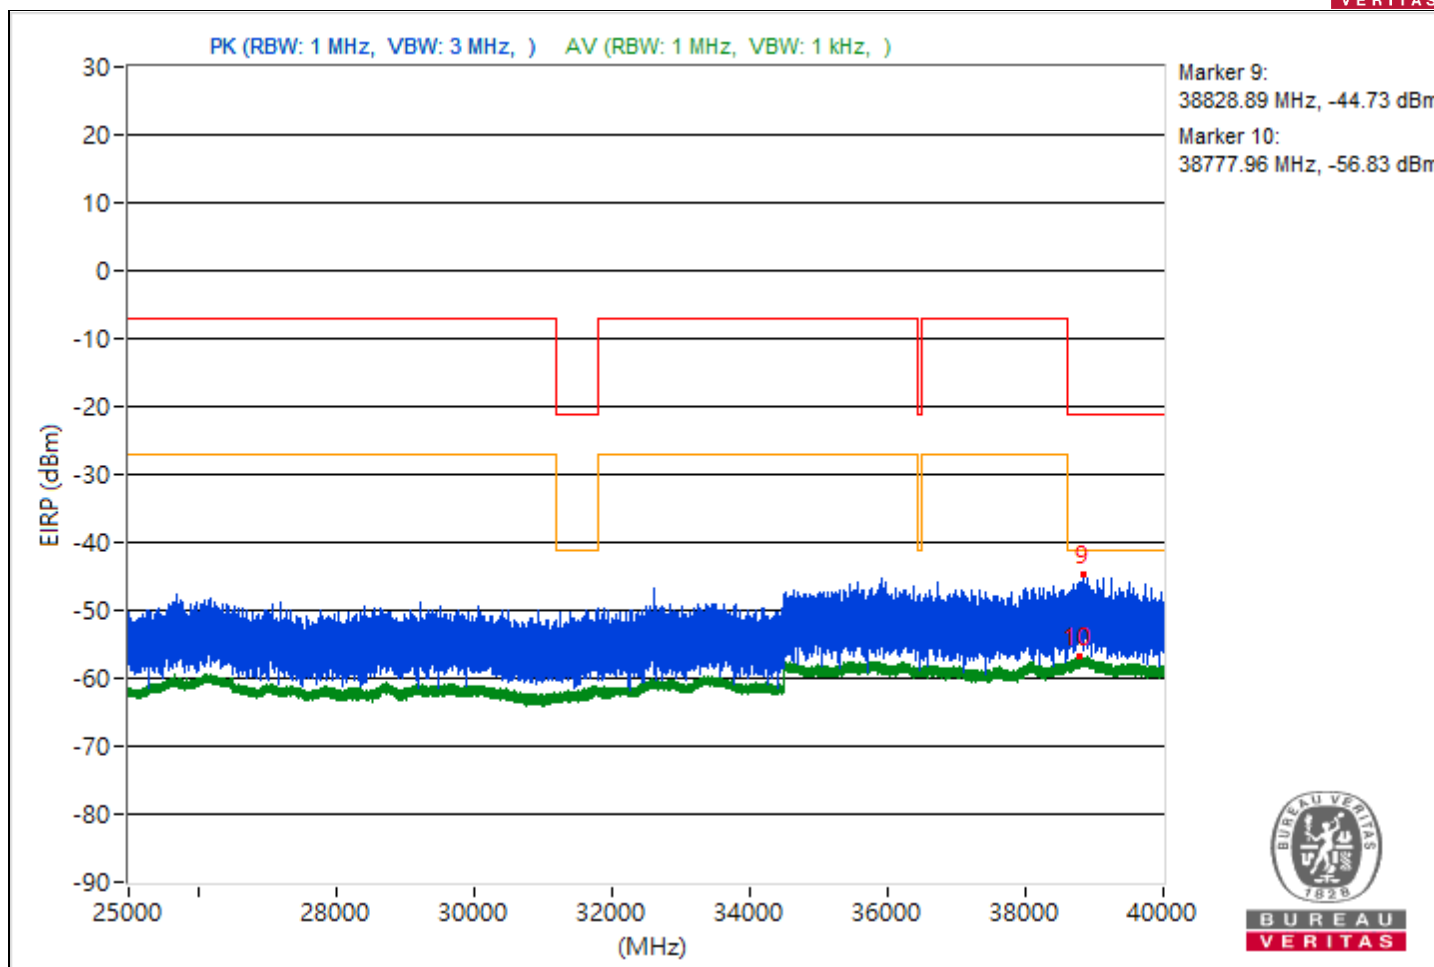





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.01	55.11 PK	74	-18.89	-45.07	4.92	-40.15
2	3828.93	42.88 AV	54	-11.12	-57.3	4.92	-52.38
3	15891.11	53.63 PK	74	-20.37	-46.55	4.92	-41.63
4	14490.31	41.75 AV	54	-12.25	-58.43	4.92	-53.51
5	21310.8	56.18 PK	74	-17.82	-44	4.92	-39.08
6	21055.7	43.9 AV	54	-10.1	-56.28	4.92	-51.36
7	22496	56.82 PK	74	-17.18	-43.36	4.92	-38.44
8	22338.7	45.14 AV	54	-8.86	-55.04	4.92	-50.12
9	38934.31	49.8 PK	74	-24.2	-50.38	4.92	-45.46
10	38826.13	38.45 AV	54	-15.55	-61.73	4.92	-56.81

Note: Margin value = Emission Level - Limit value

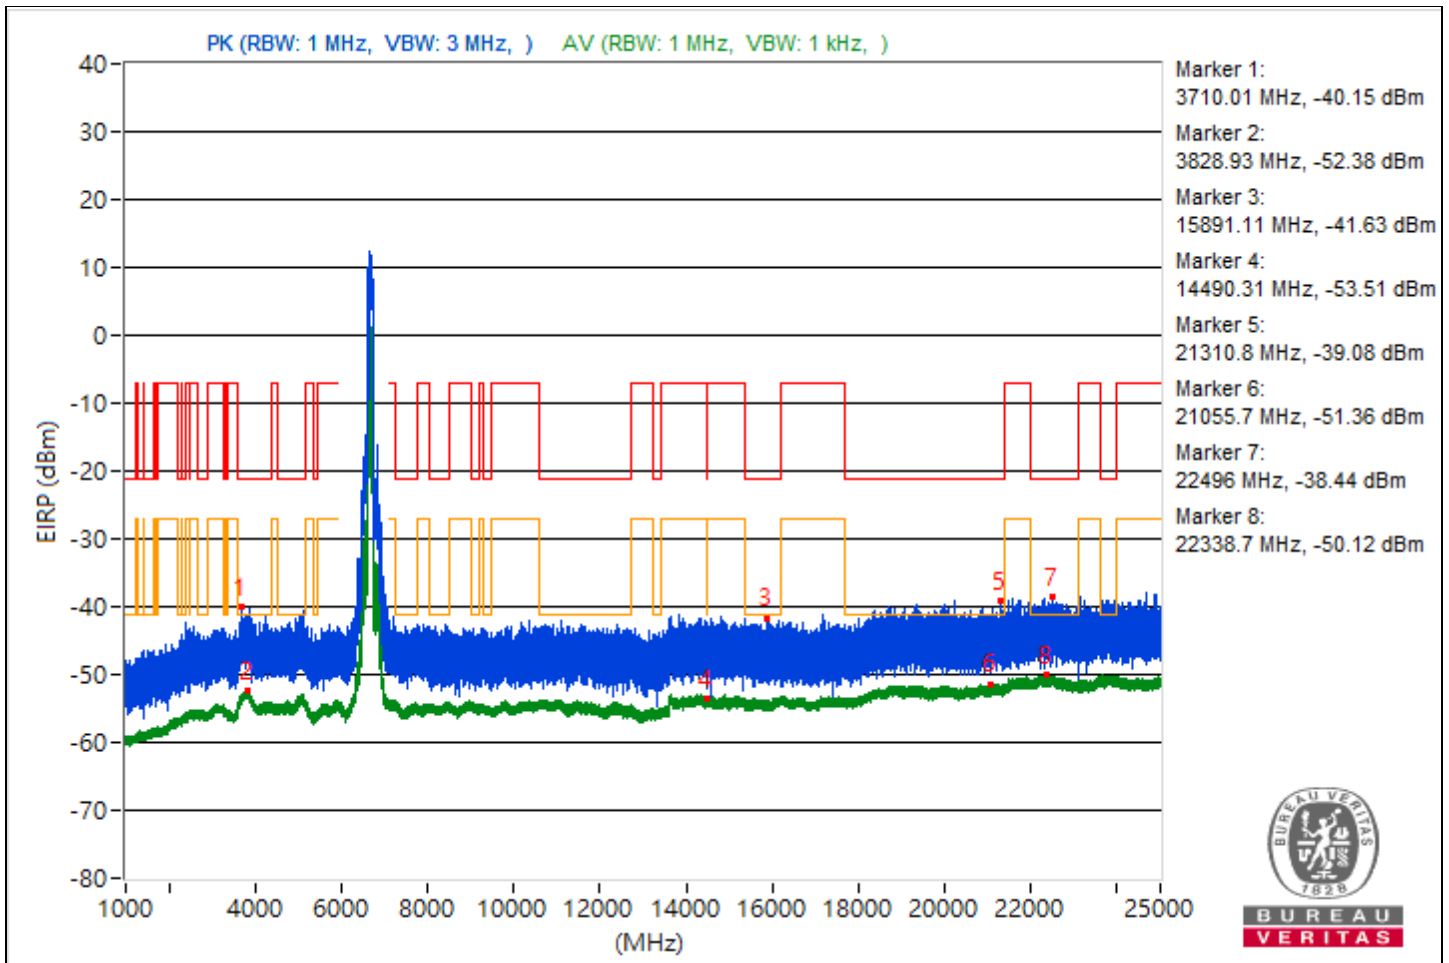

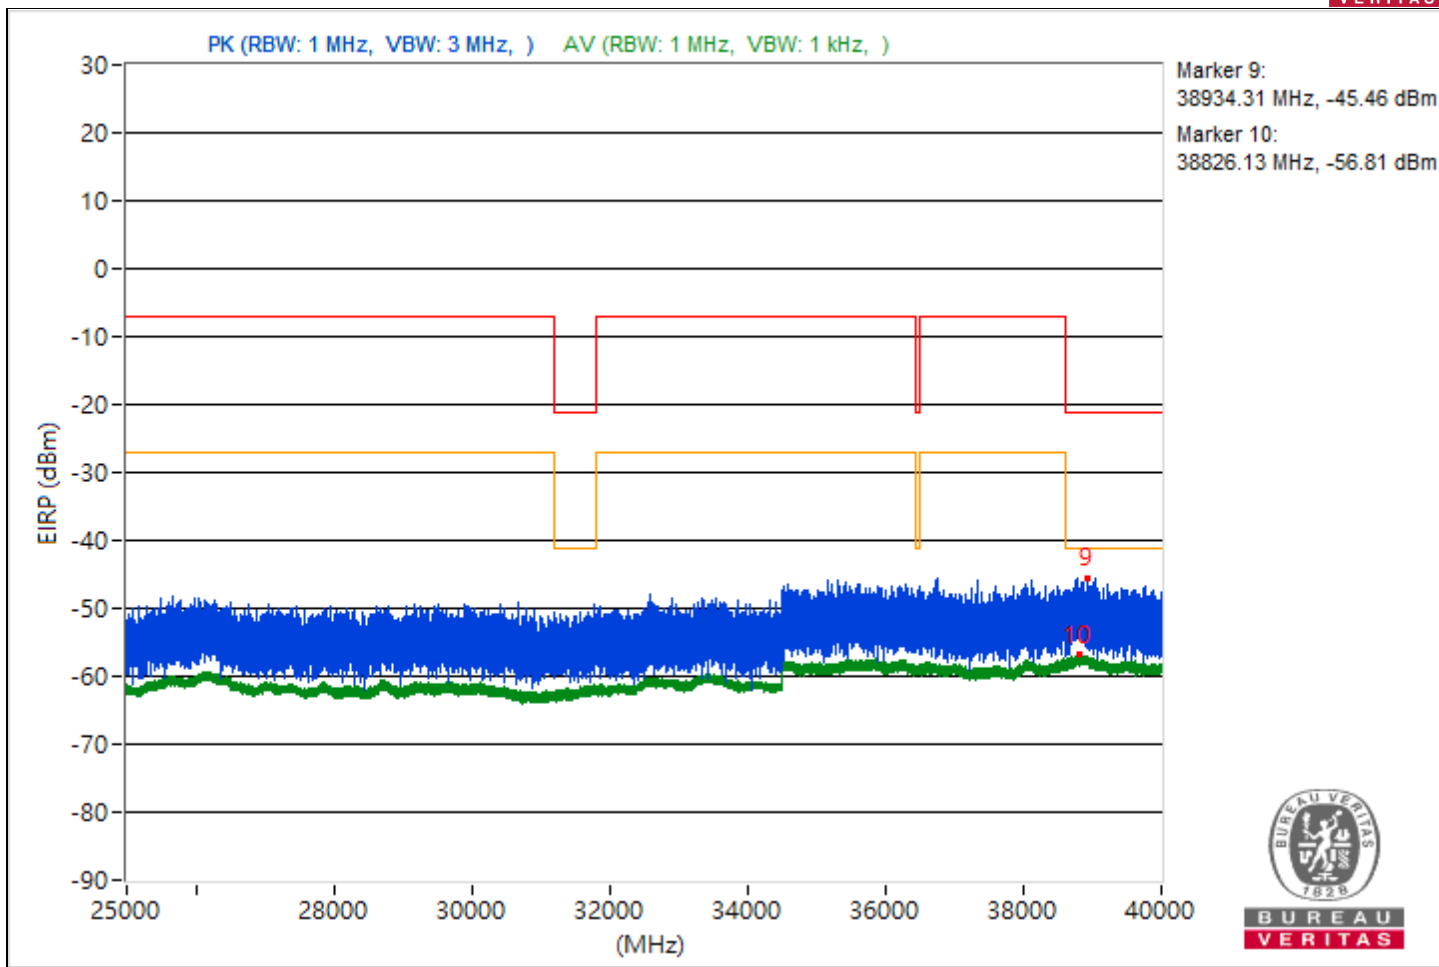





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3714.37	55.15 PK	74	-18.85	-45.03	4.92	-40.11
2	3819.52	42.86 AV	54	-11.14	-57.32	4.92	-52.4
3	9157.16	54.02 PK	74	-19.98	-46.16	4.92	-41.24
4	14491.47	42.21 AV	54	-11.79	-57.97	4.92	-53.05
5	19894.6	55.69 PK	74	-18.31	-44.49	4.92	-39.57
6	21397	43.83 AV	54	-10.17	-56.35	4.92	-51.43
7	22165.6	57.88 PK	74	-16.12	-42.3	4.92	-37.38
8	22229	45.07 AV	54	-8.93	-55.11	4.92	-50.19
9	38825.6	50.49 PK	74	-23.51	-49.69	4.92	-44.77
10	38827.02	38.61 AV	54	-15.39	-61.57	4.92	-56.65

Note: Margin value = Emission Level - Limit value

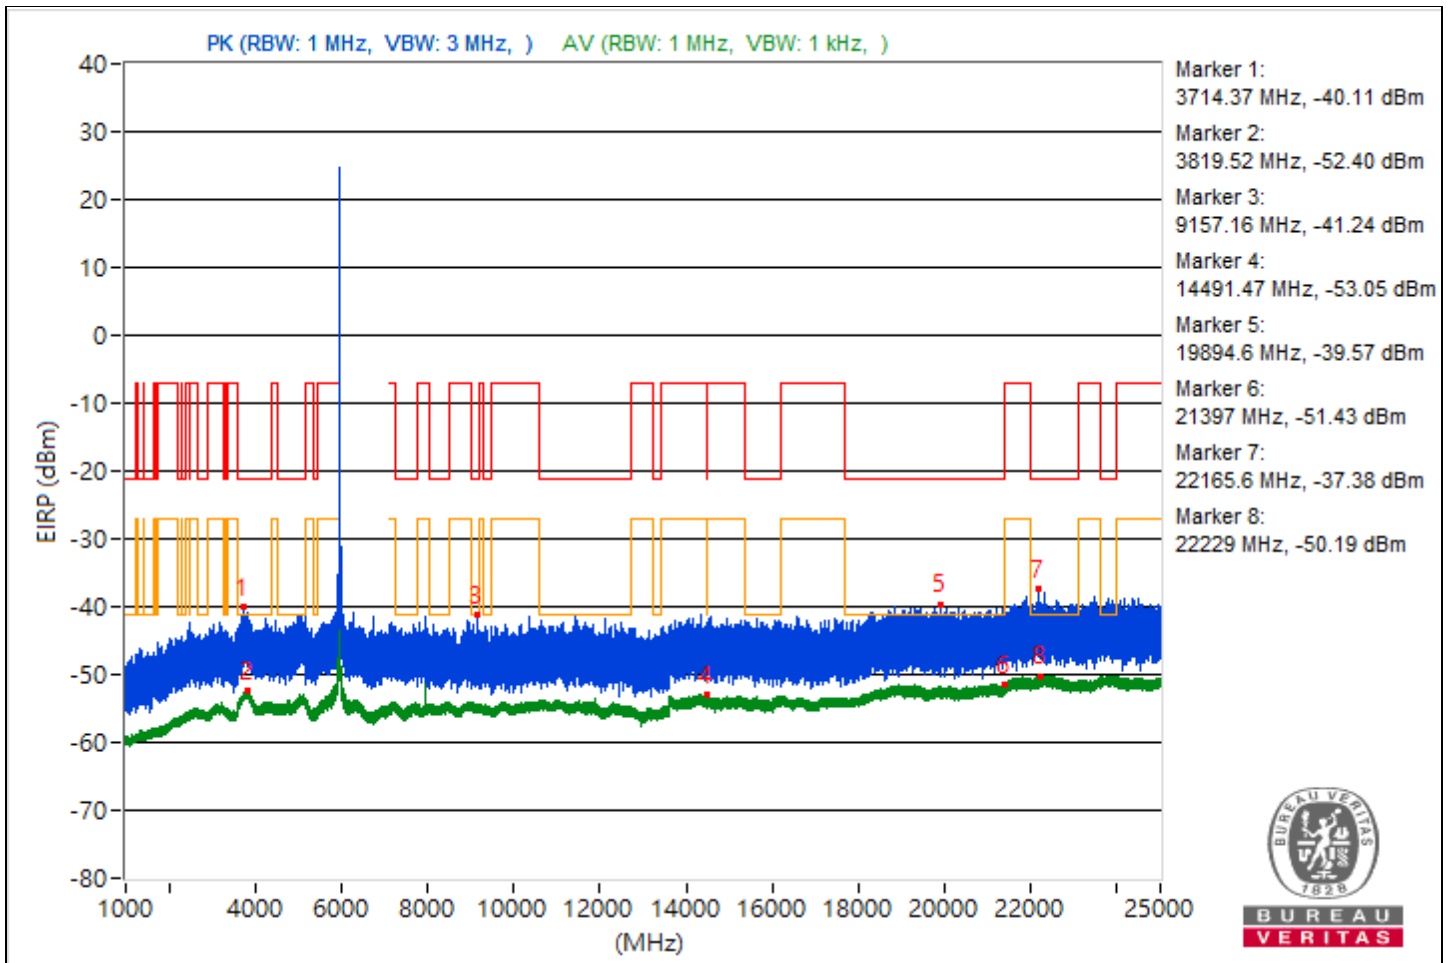

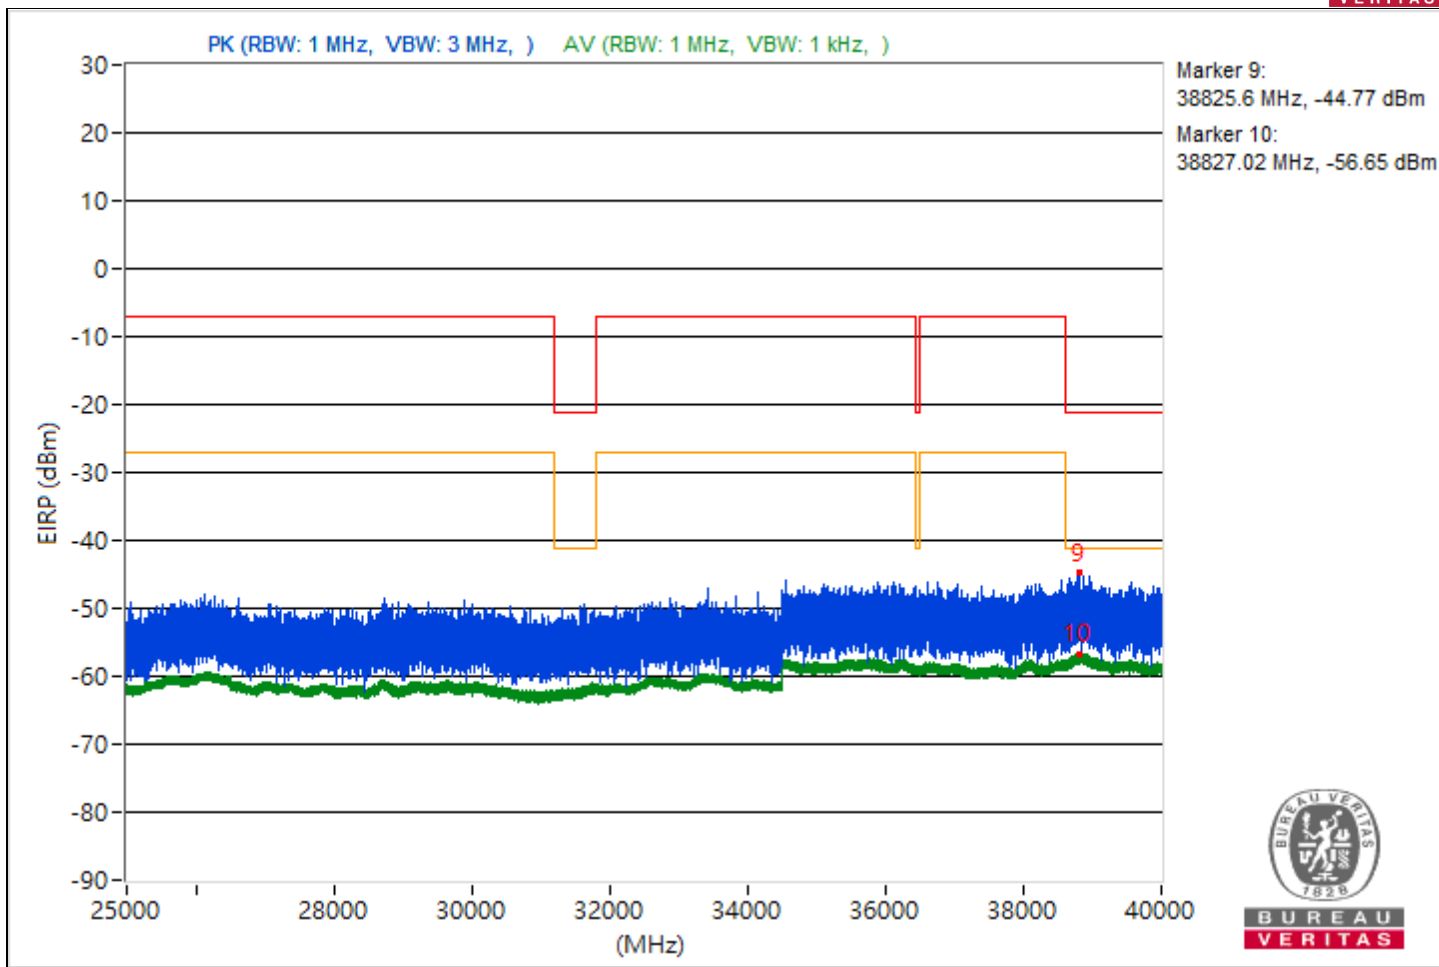





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.4	54.31 PK	74	-19.69	-45.87	4.92	-40.95
2	3808.4	42.87 AV	54	-11.13	-57.31	4.92	-52.39
3	11190.04	53.94 PK	74	-20.06	-46.24	4.92	-41.32
4	14495.91	41.96 AV	54	-12.04	-58.22	4.92	-53.3
5	20033.9	56.1 PK	74	-17.9	-44.08	4.92	-39.16
6	21131.8	43.85 AV	54	-10.15	-56.33	4.92	-51.41
7	22233.4	57.55 PK	74	-16.45	-42.63	4.92	-37.71
8	23781.1	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	39351.73	49.72 PK	74	-24.28	-50.46	4.92	-45.54
10	38824.27	38.56 AV	54	-15.44	-61.62	4.92	-56.7

Note: Margin value = Emission Level - Limit value

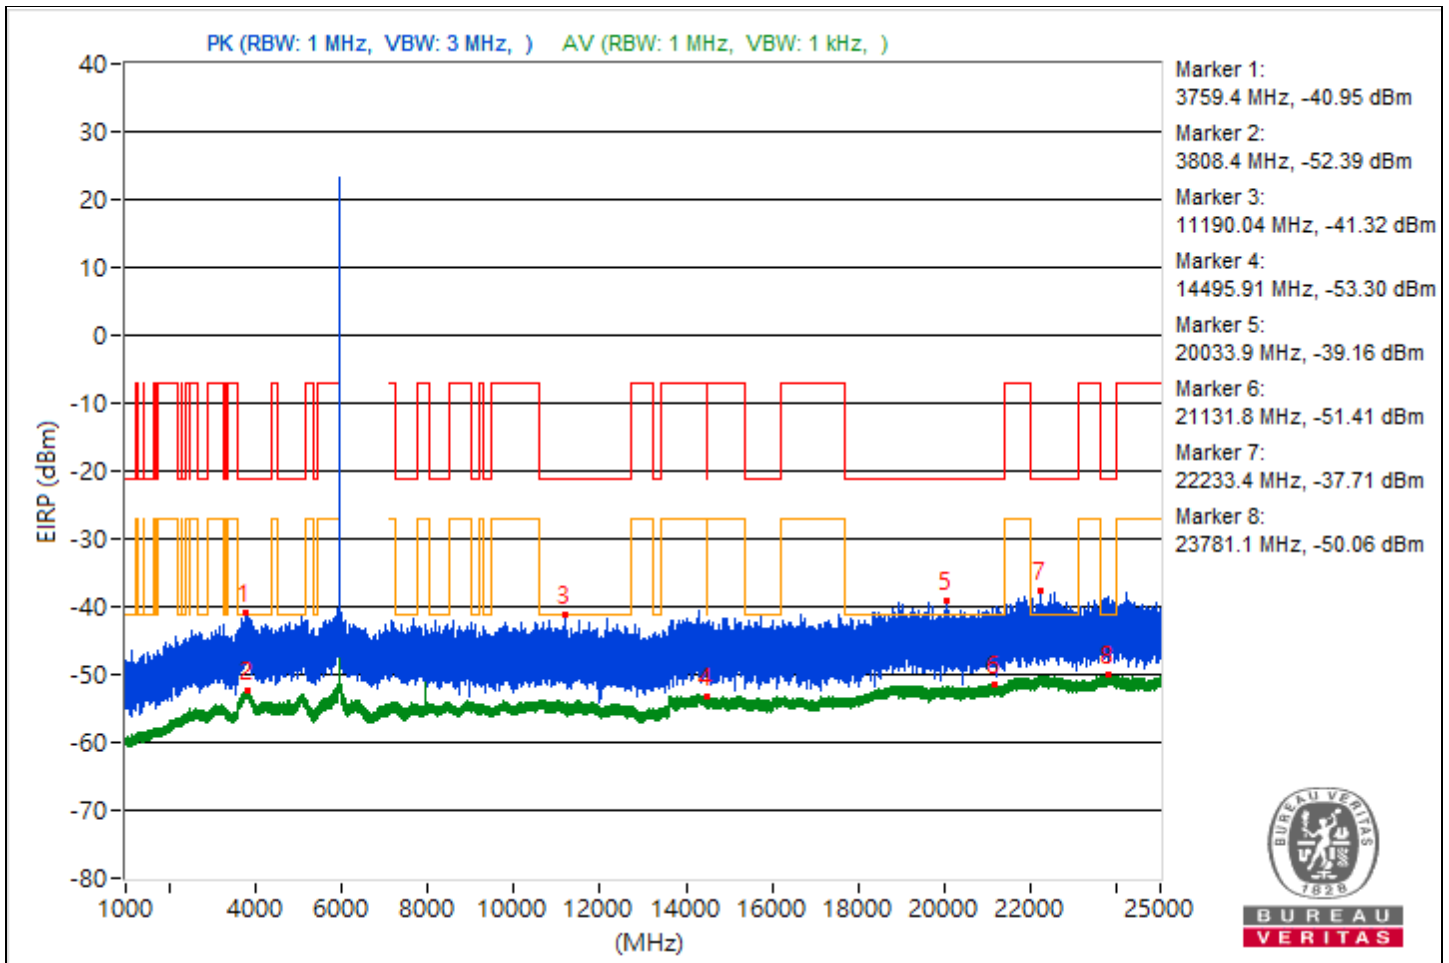

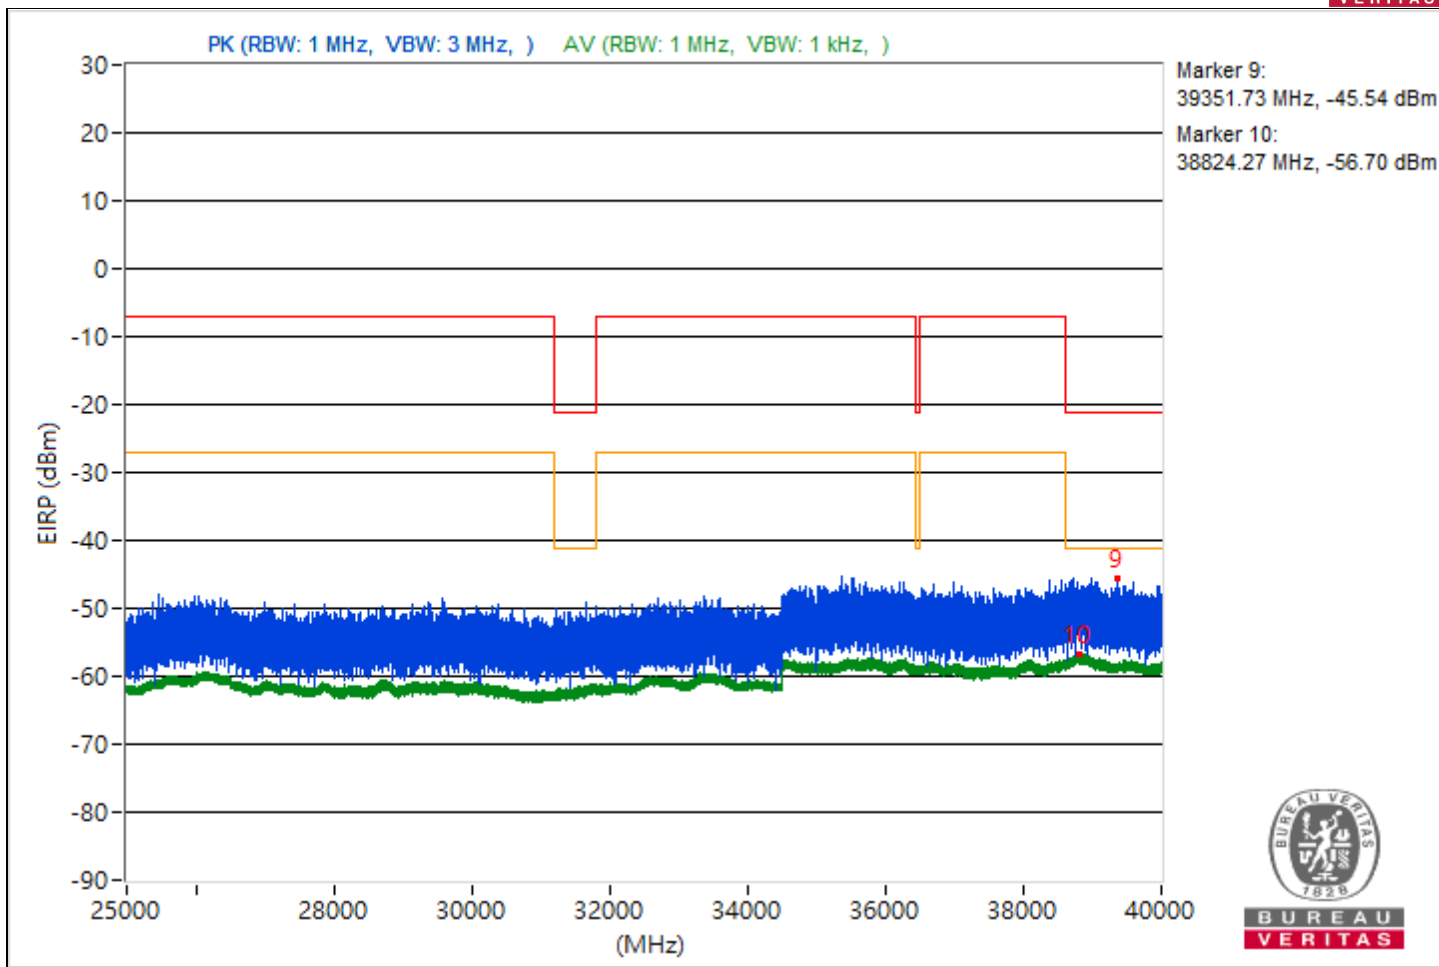





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3860.51	55.55 PK	74	-18.45	-44.63	4.92	-39.71
2	3812.76	42.94 AV	54	-11.06	-57.24	4.92	-52.32
3	15704.89	54.98 PK	74	-19.02	-45.2	4.92	-40.28
4	14497.87	41.8 AV	54	-12.2	-58.38	4.92	-53.46
5	19907.2	56.72 PK	74	-17.28	-43.46	4.92	-38.54
6	21380.4	43.88 AV	54	-10.12	-56.3	4.92	-51.38
7	23808.8	57.7 PK	74	-16.3	-42.48	4.92	-37.56
8	23747.6	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	38813.6	49.59 PK	74	-24.41	-50.59	4.92	-45.67
10	38827.2	38.58 AV	54	-15.42	-61.6	4.92	-56.68

Note: Margin value = Emission Level - Limit value

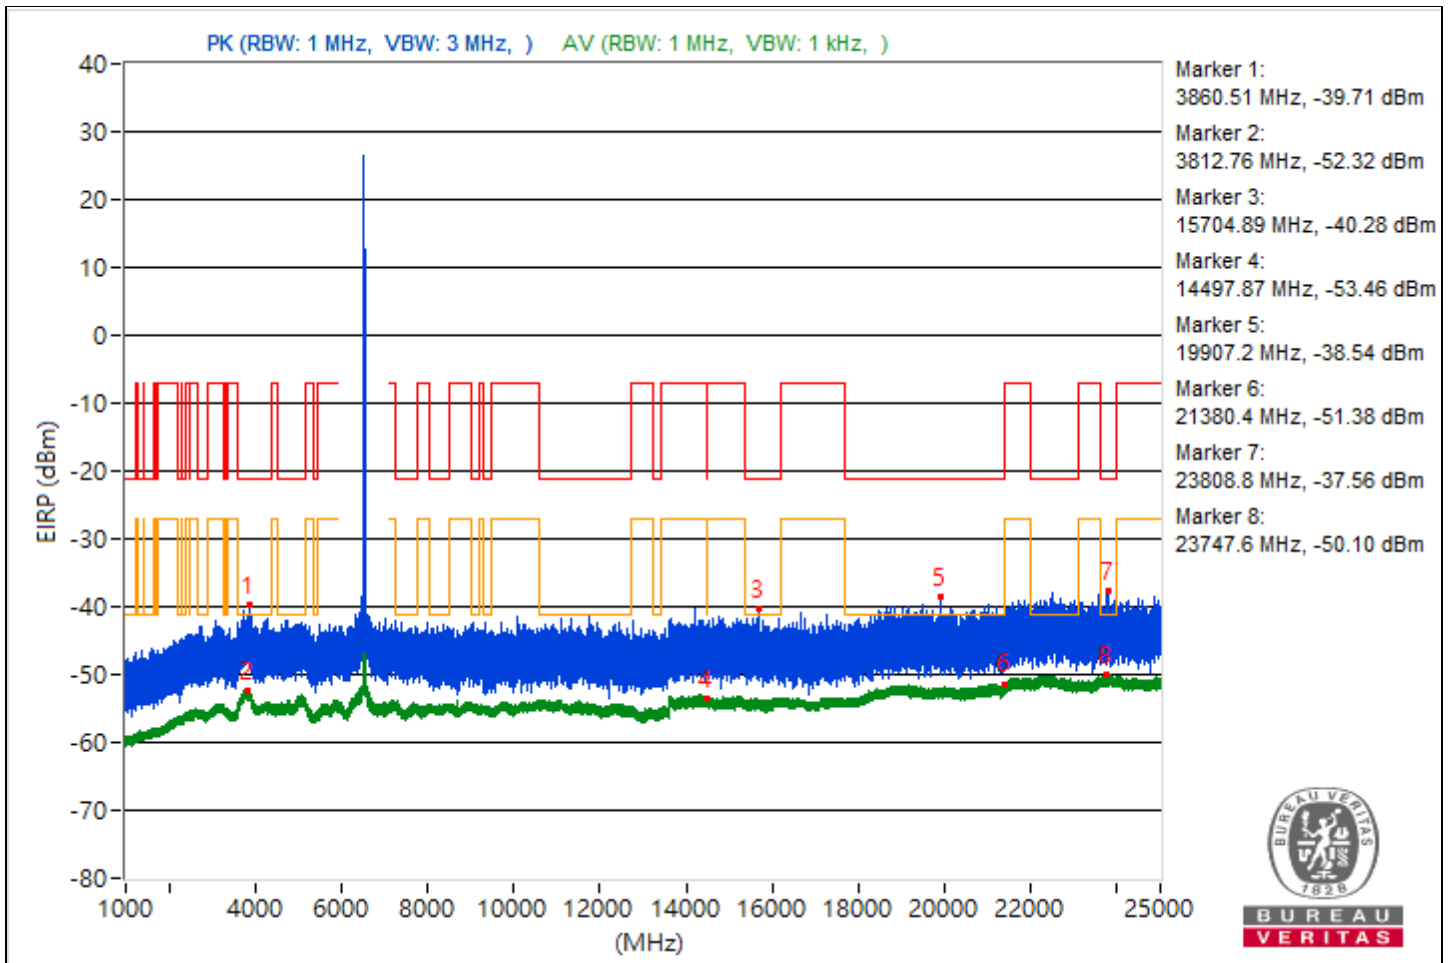

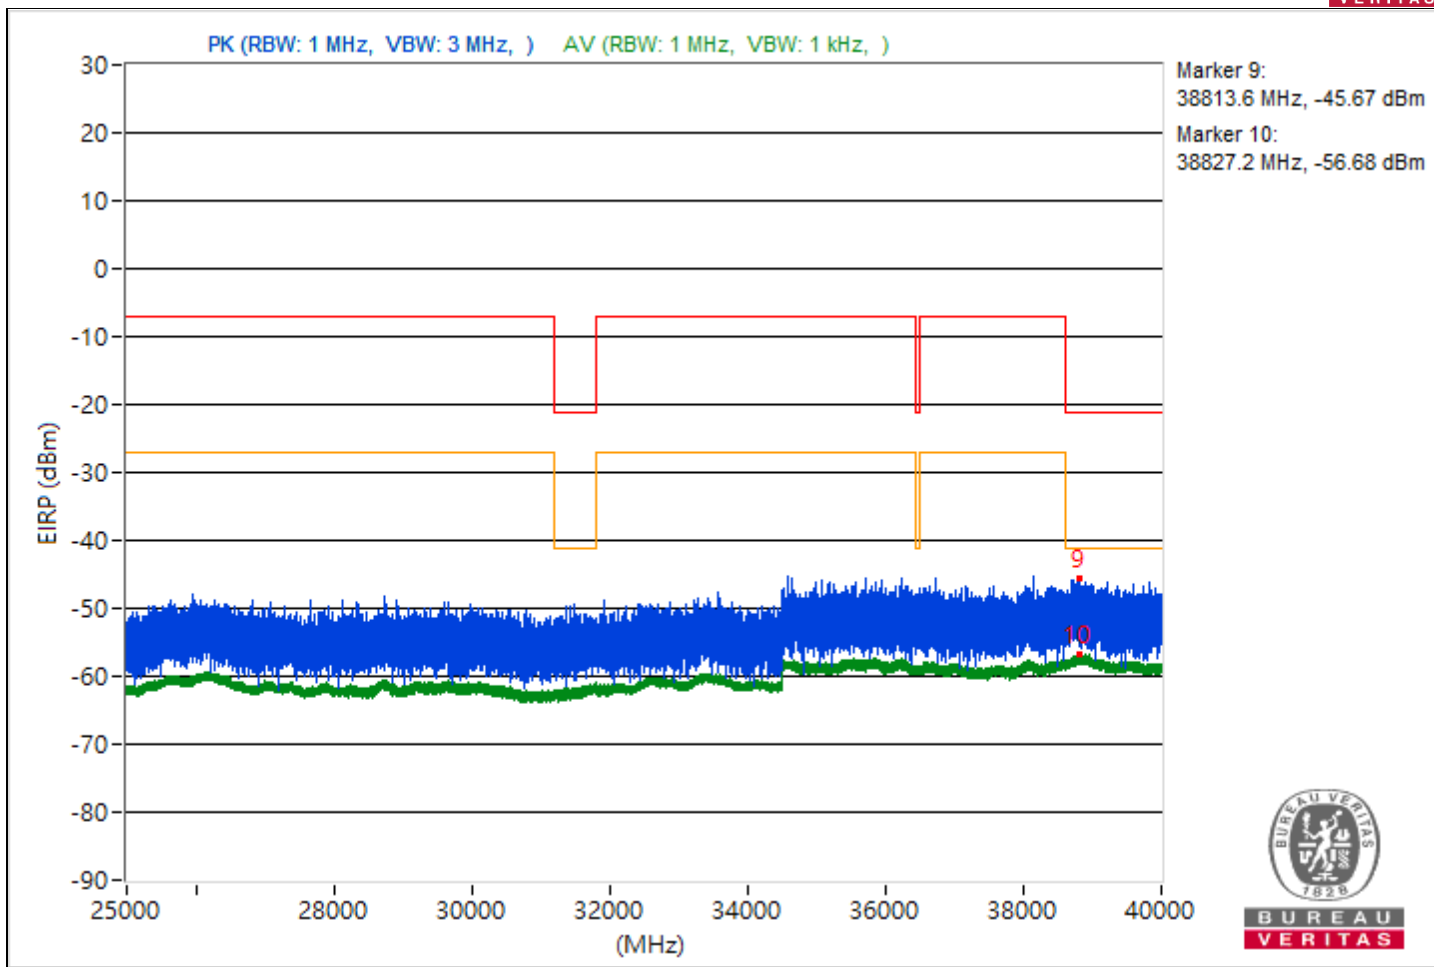





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.22	54.5 PK	74	-19.5	-45.68	4.92	-40.76
2	3808.01	42.94 AV	54	-11.06	-57.24	4.92	-52.32
3	12403.29	53.92 PK	74	-20.08	-46.26	4.92	-41.34
4	14497.96	42.04 AV	54	-11.96	-58.14	4.92	-53.22
5	20794.1	55.66 PK	74	-18.34	-44.52	4.92	-39.6
6	21091.3	43.95 AV	54	-10.05	-56.23	4.92	-51.31
7	22594.5	57.21 PK	74	-16.79	-42.97	4.92	-38.05
8	22235.3	45.29 AV	54	-8.71	-54.89	4.92	-49.97
9	39019.47	49.68 PK	74	-24.32	-50.5	4.92	-45.58
10	38840.09	38.8 AV	54	-15.2	-61.38	4.92	-56.46

Note: Margin value = Emission Level - Limit value

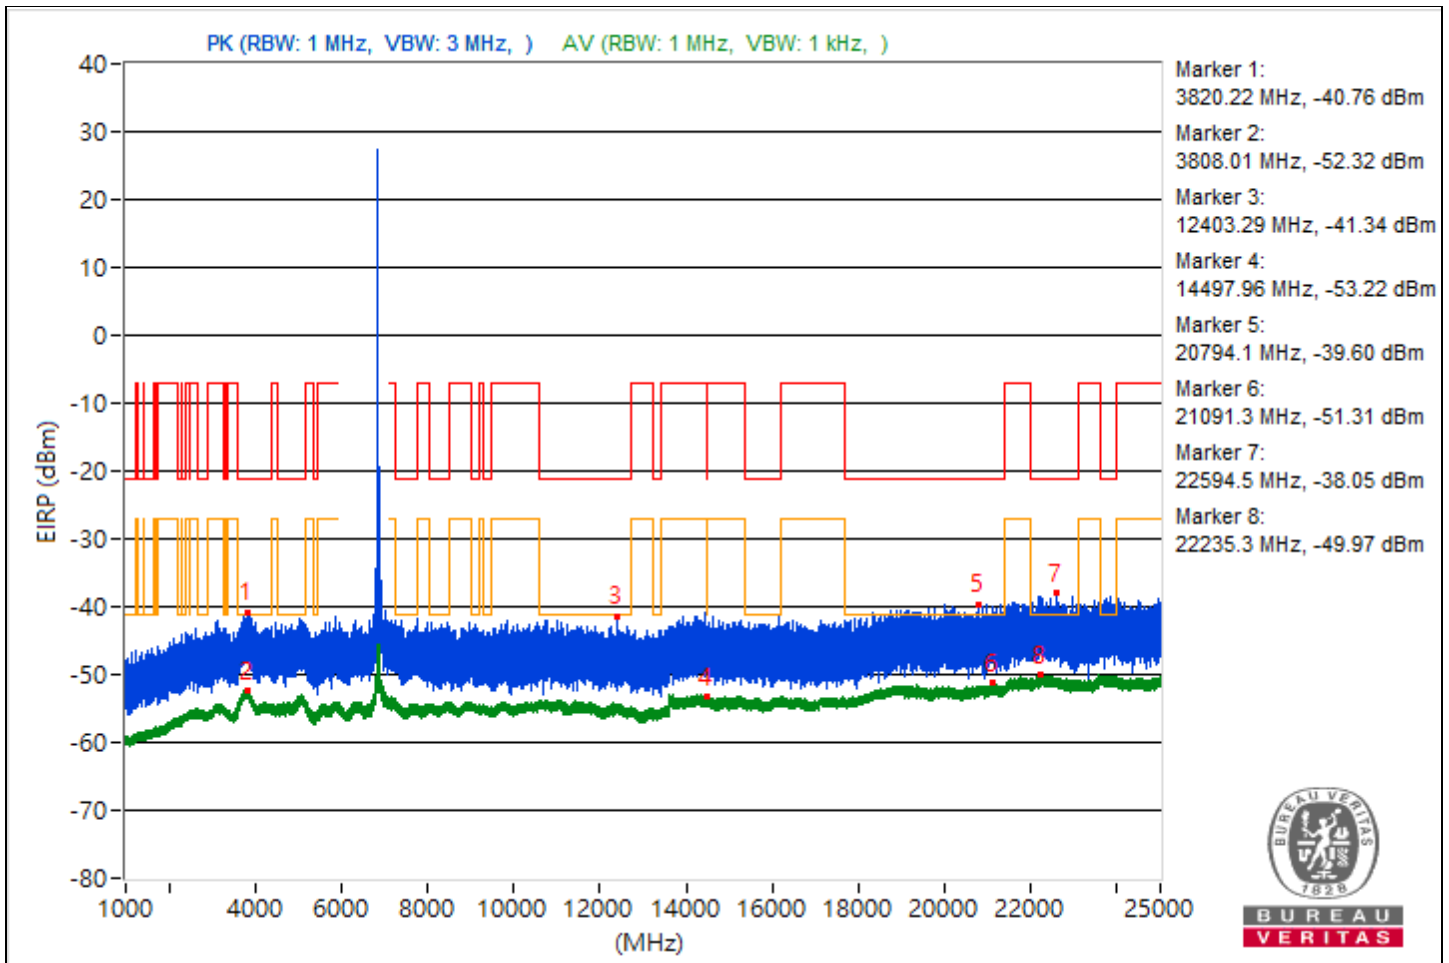

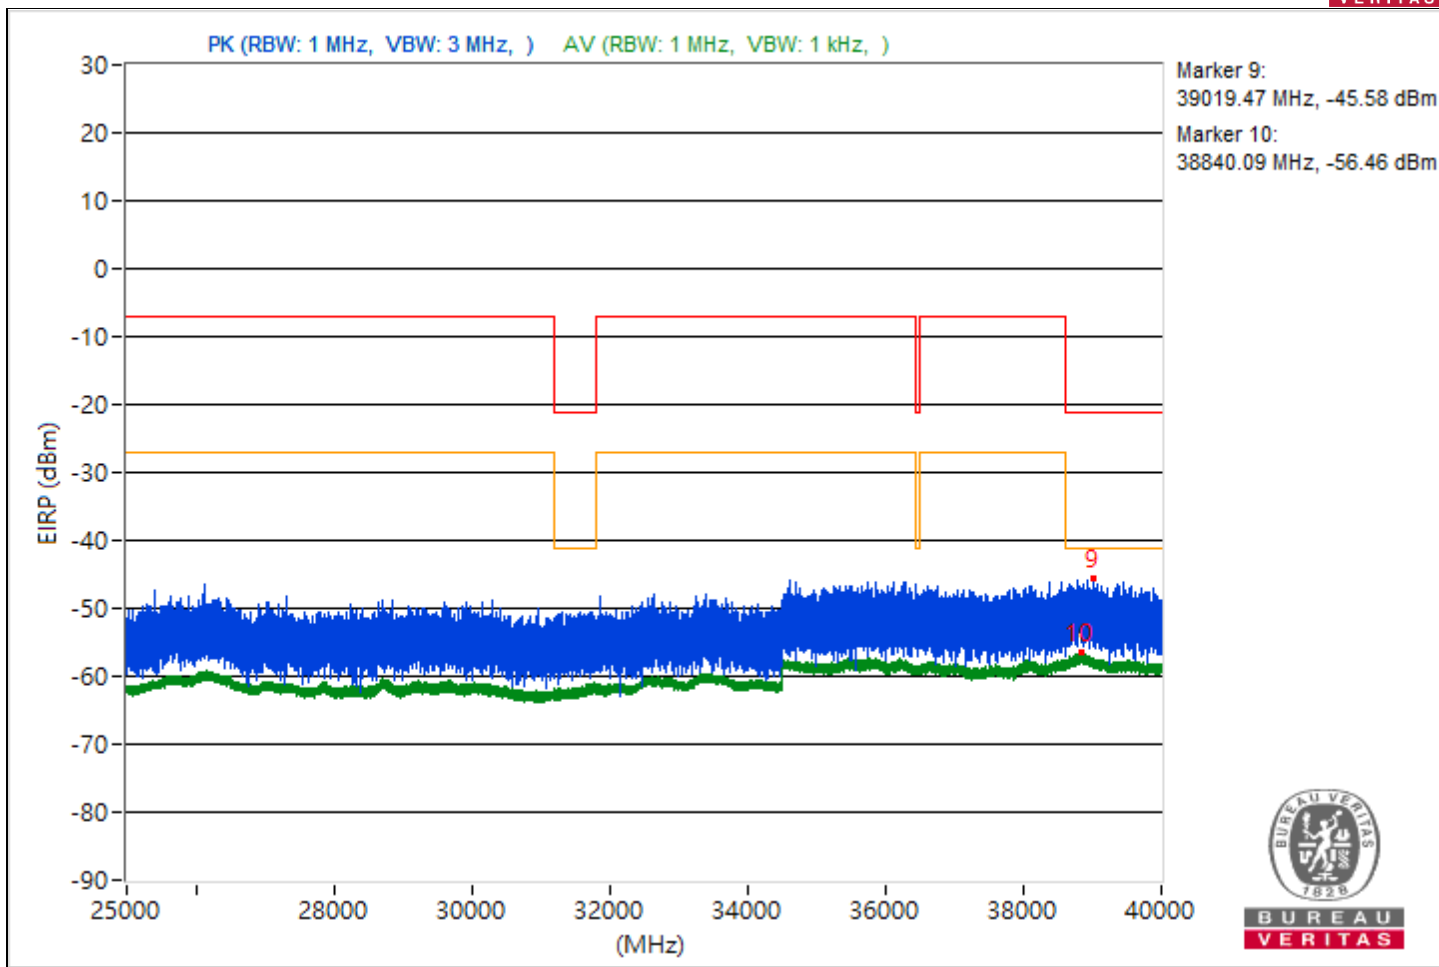





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.41	54.99 PK	74	-19.01	-45.19	4.92	-40.27
2	3806.53	42.95 AV	54	-11.05	-57.23	4.92	-52.31
3	12010.22	53.35 PK	74	-20.65	-46.83	4.92	-41.91
4	14486.76	41.8 AV	54	-12.2	-58.38	4.92	-53.46
5	20905.6	55.24 PK	74	-18.76	-44.94	4.92	-40.02
6	21134.8	43.84 AV	54	-10.16	-56.34	4.92	-51.42
7	23686.5	56.77 PK	74	-17.23	-43.41	4.92	-38.49
8	22357.6	45.19 AV	54	-8.81	-54.99	4.92	-50.07
9	39934.22	50.02 PK	74	-23.98	-50.16	4.92	-45.24
10	38835.56	38.56 AV	54	-15.44	-61.62	4.92	-56.7

Note: Margin value = Emission Level - Limit value

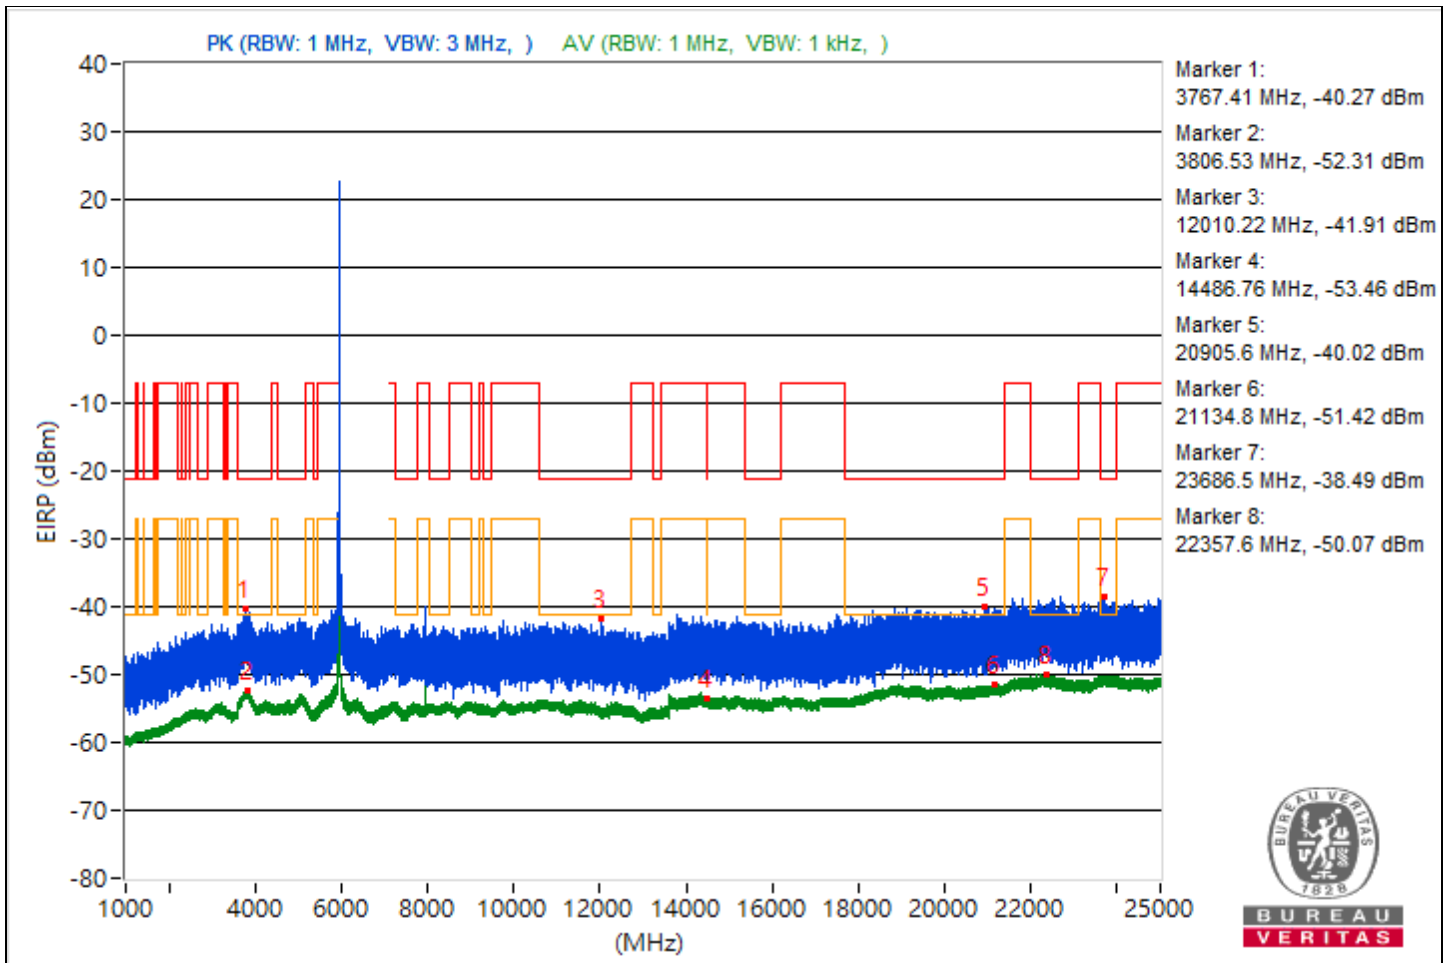

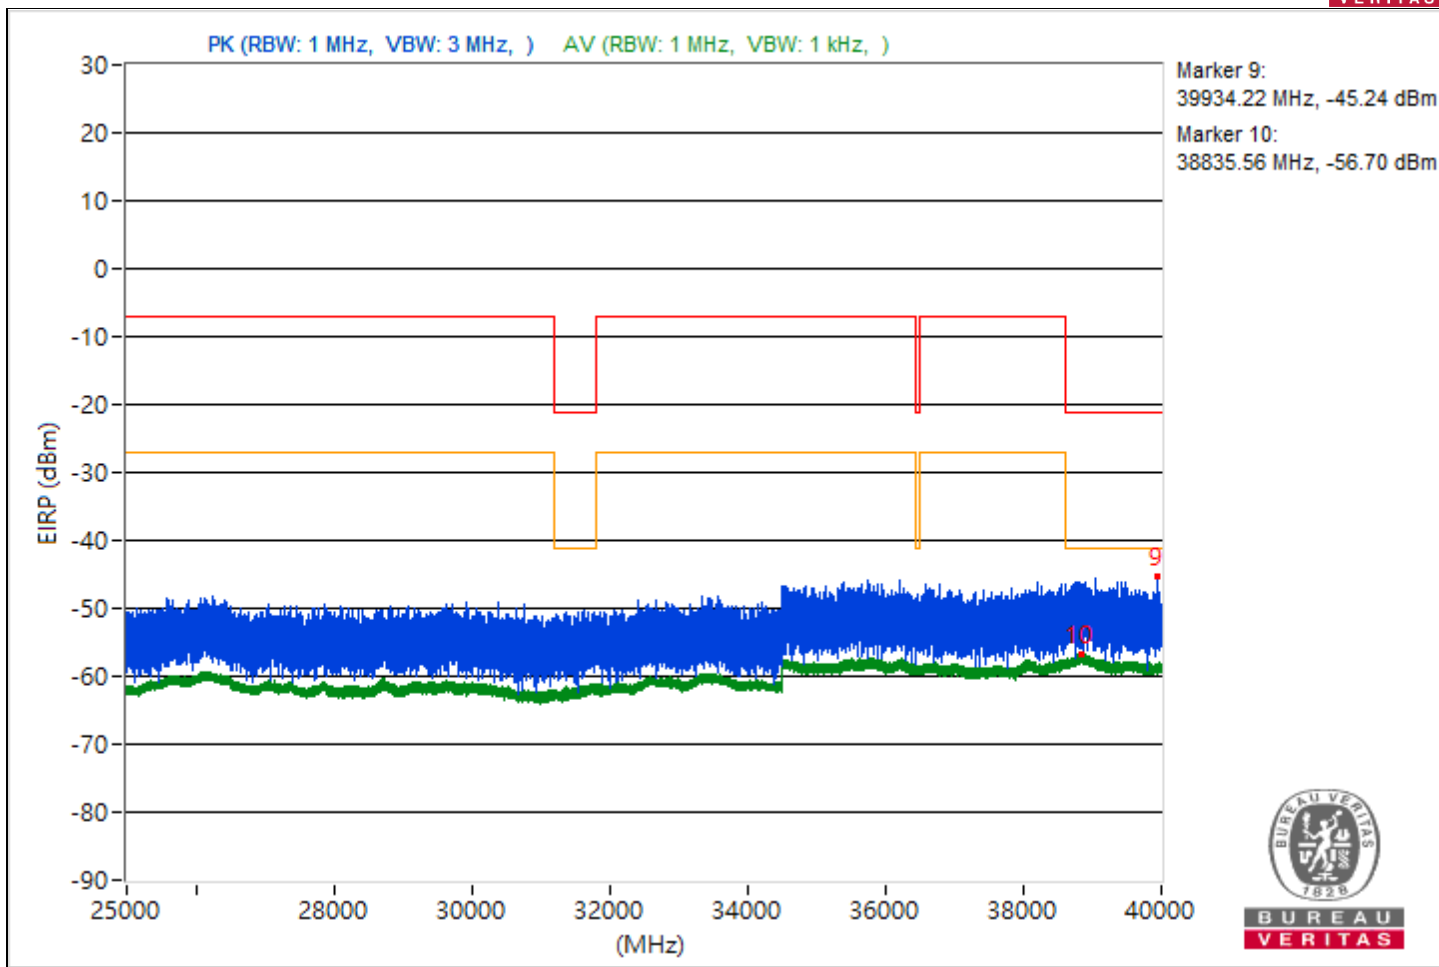





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3834.77	54.27 PK	74	-19.73	-45.91	4.92	-40.99
2	3765.86	43.04 AV	54	-10.96	-57.14	4.92	-52.22
3	11633.07	53.84 PK	74	-20.16	-46.34	4.92	-41.42
4	14491.29	41.9 AV	54	-12.1	-58.28	4.92	-53.36
5	20306.7	55.71 PK	74	-18.29	-44.47	4.92	-39.55
6	21121.9	43.91 AV	54	-10.09	-56.27	4.92	-51.35
7	23667.2	57.44 PK	74	-16.56	-42.74	4.92	-37.82
8	22355.6	45.28 AV	54	-8.72	-54.9	4.92	-49.98
9	38701.96	49.8 PK	74	-24.2	-50.38	4.92	-45.46
10	38889.16	38.67 AV	54	-15.33	-61.51	4.92	-56.59

Note: Margin value = Emission Level - Limit value

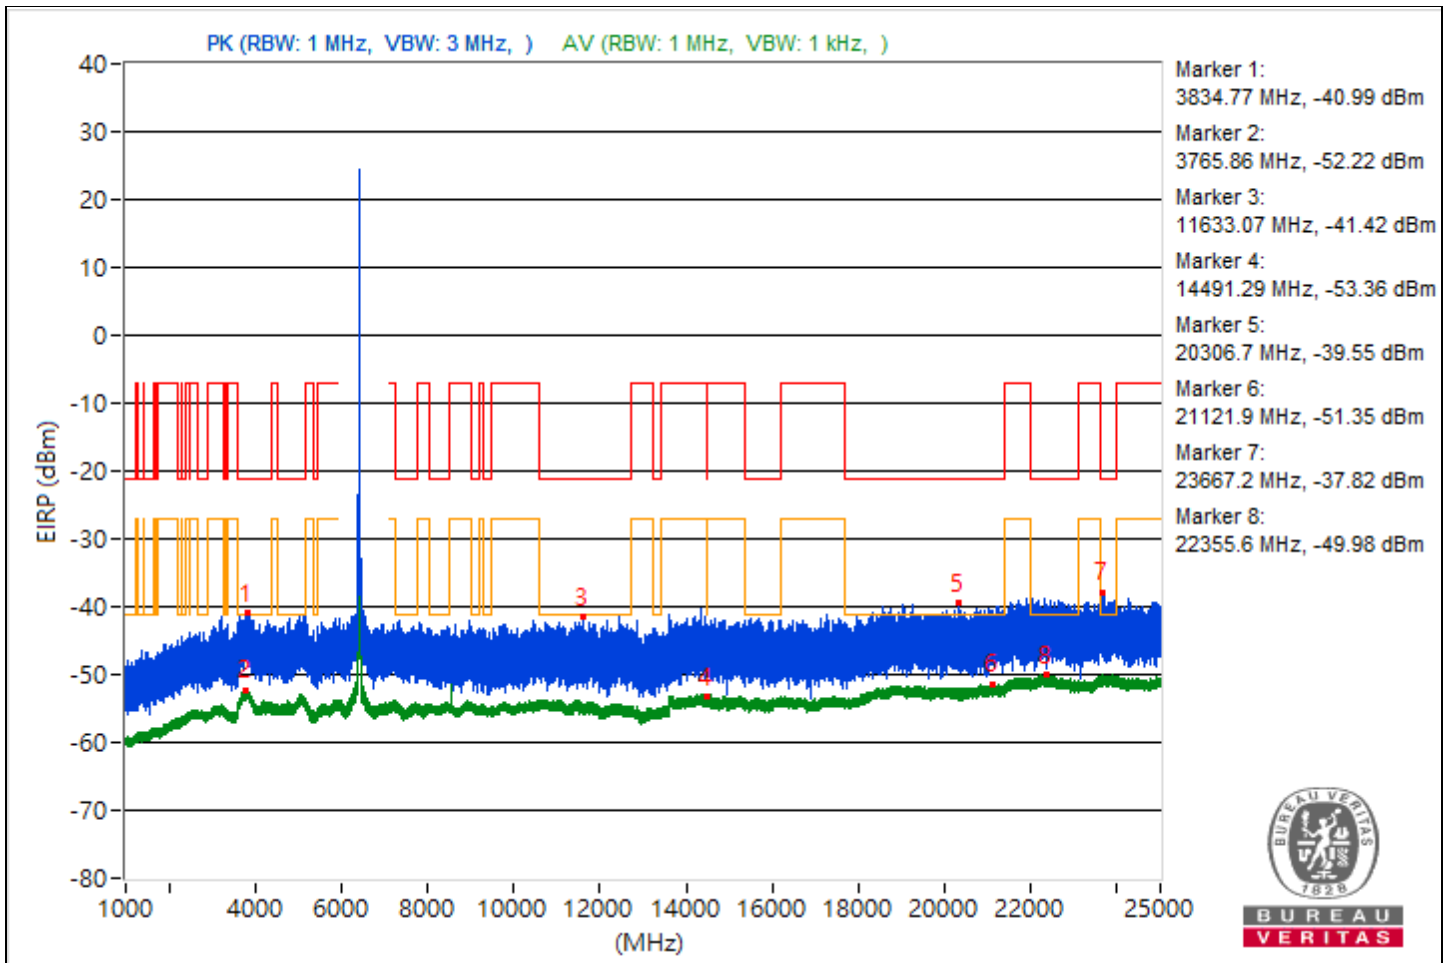

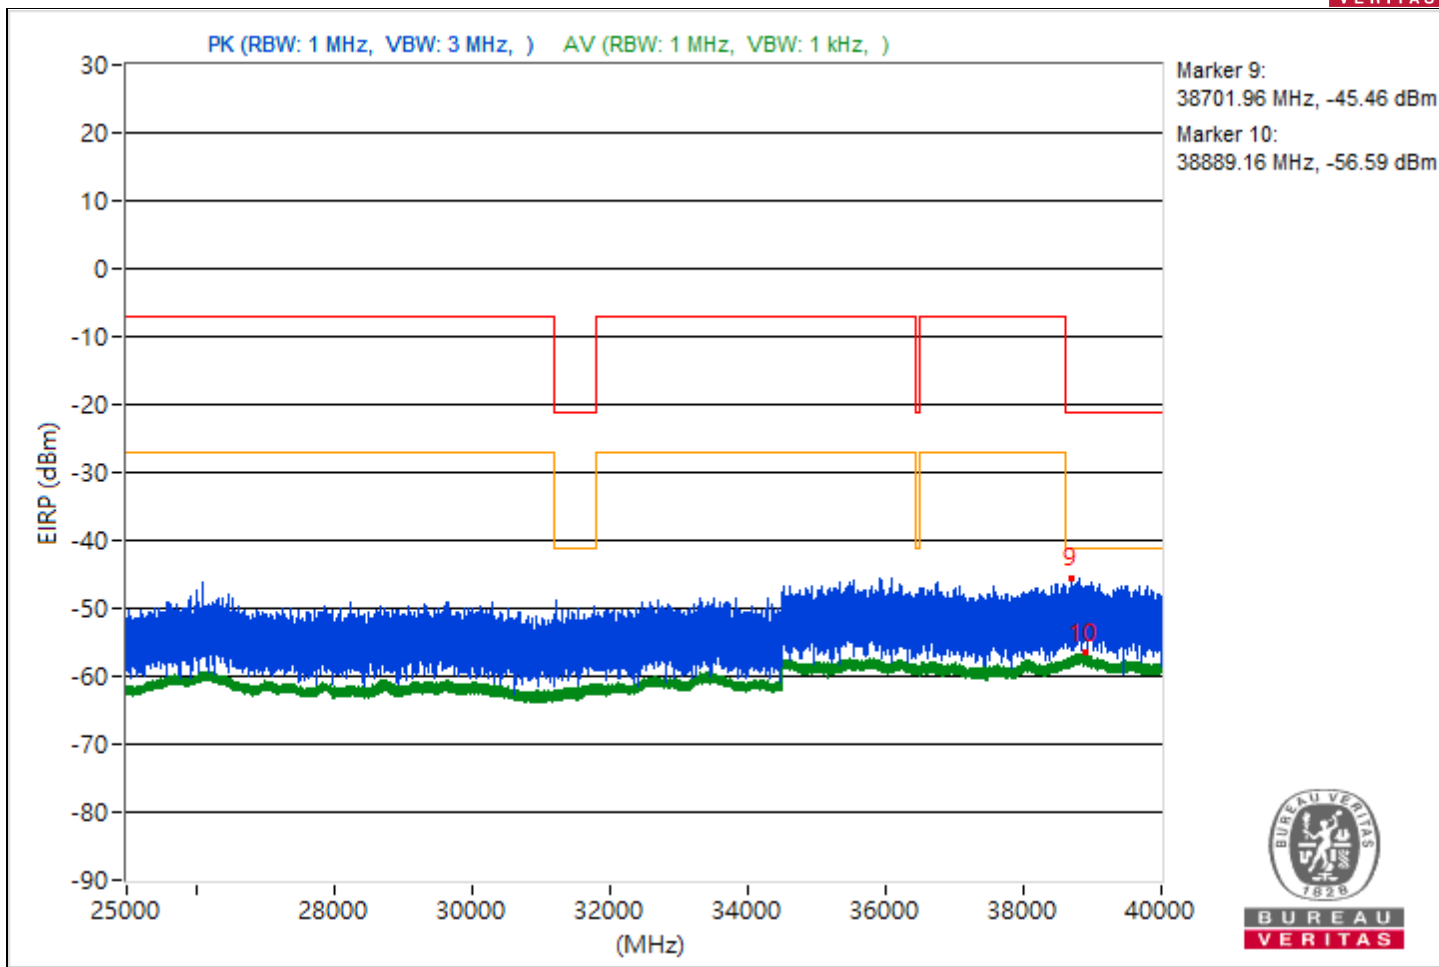





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3845.73	55.6 PK	74	-18.4	-44.58	4.92	-39.66
2	3815.09	43.16 AV	54	-10.84	-57.02	4.92	-52.1
3	11177.87	53.58 PK	74	-20.42	-46.6	4.92	-41.68
4	14489.51	41.92 AV	54	-12.08	-58.26	4.92	-53.34
5	20918.2	55.42 PK	74	-18.58	-44.76	4.92	-39.84
6	21141.8	43.86 AV	54	-10.14	-56.32	4.92	-51.4
7	23729.5	57.78 PK	74	-16.22	-42.4	4.92	-37.48
8	22312.7	45.12 AV	54	-8.88	-55.06	4.92	-50.14
9	38825.69	50.46 PK	74	-23.54	-49.72	4.92	-44.8
10	38809.6	38.54 AV	54	-15.46	-61.64	4.92	-56.72

Note: Margin value = Emission Level - Limit value

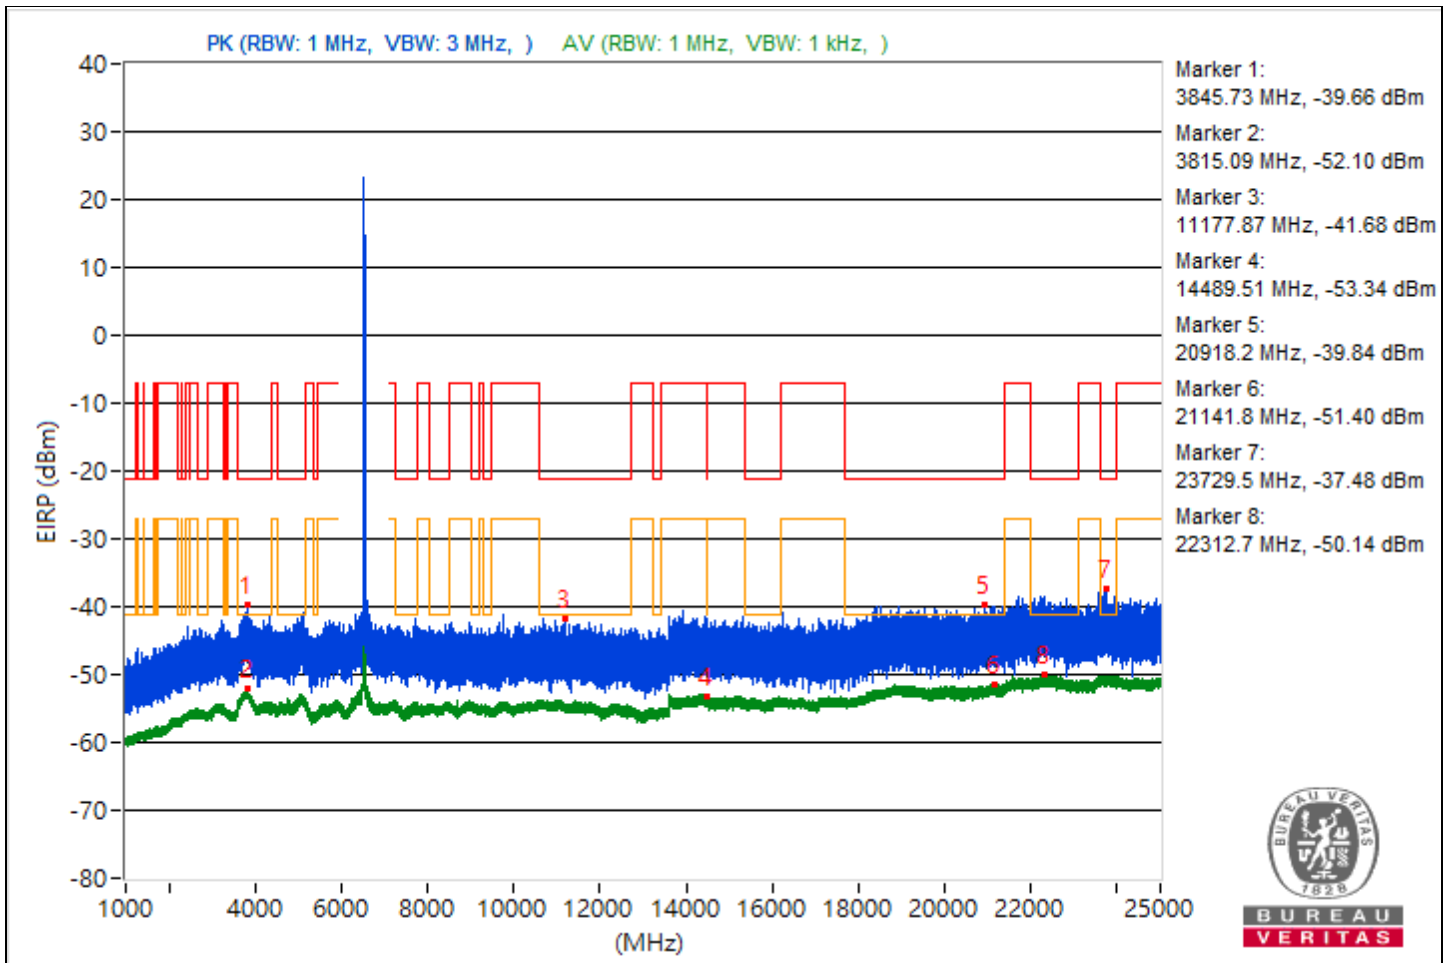

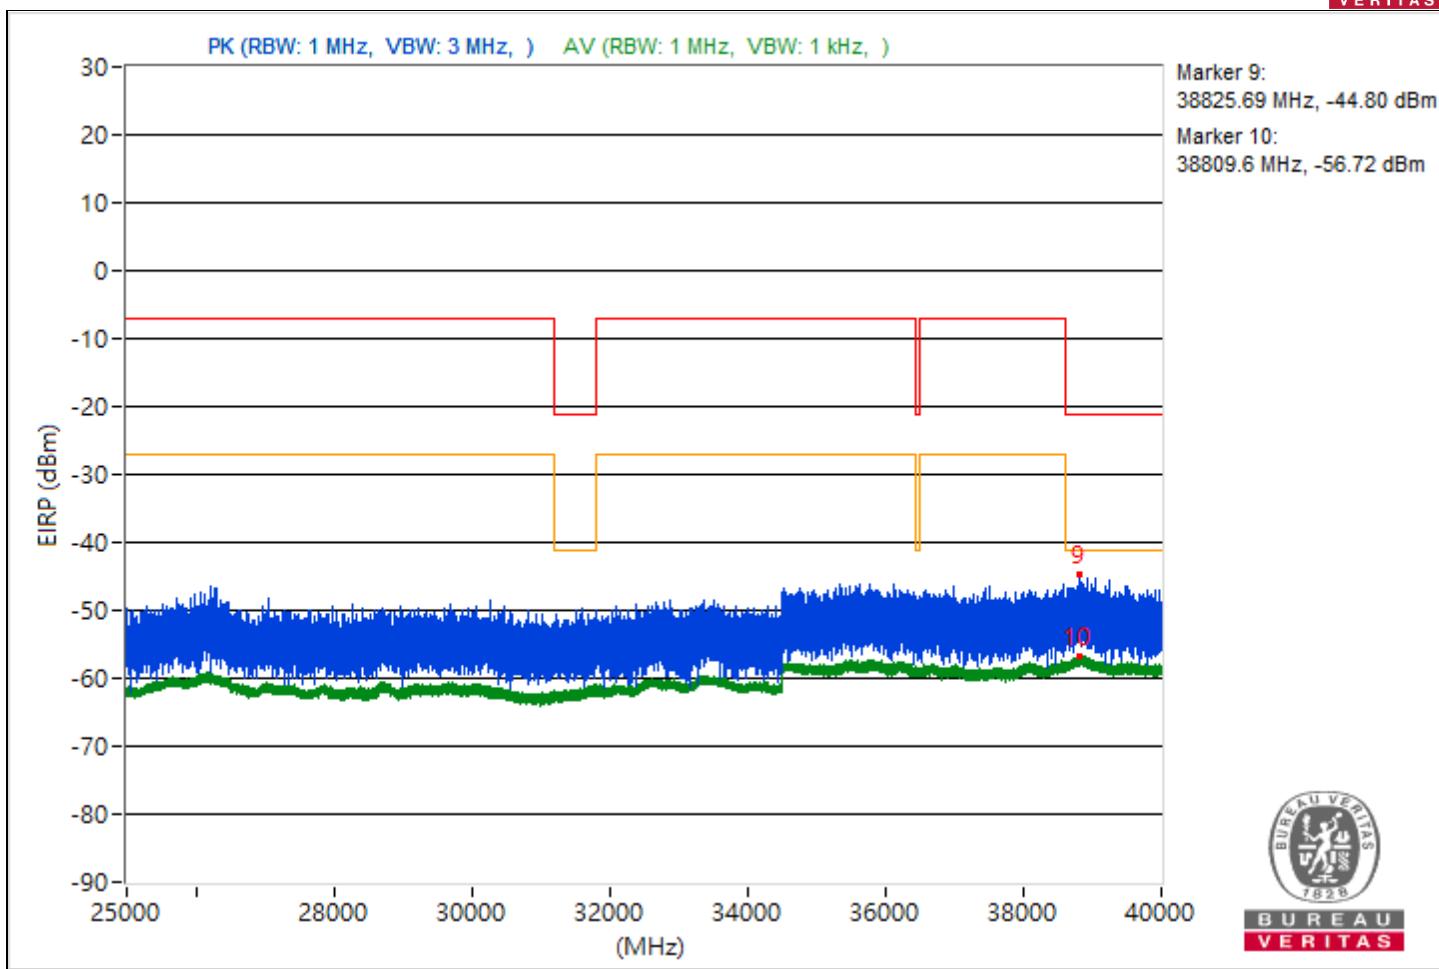





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5084.34	54.21 PK	74	-19.79	-45.97	4.92	-41.05
2	3770.13	43.01 AV	54	-10.99	-57.17	4.92	-52.25
3	10660.71	54.17 PK	74	-19.83	-46.01	4.92	-41.09
4	14471.73	42.08 AV	54	-11.92	-58.1	4.92	-53.18
5	19319.6	56.2 PK	74	-17.8	-43.98	4.92	-39.06
6	21113.6	43.82 AV	54	-10.18	-56.36	4.92	-51.44
7	22156.2	57.6 PK	74	-16.4	-42.58	4.92	-37.66
8	22386.5	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	38767.64	50.22 PK	74	-23.78	-49.96	4.92	-45.04
10	38813.6	38.68 AV	54	-15.32	-61.5	4.92	-56.58

Note: Margin value = Emission Level - Limit value

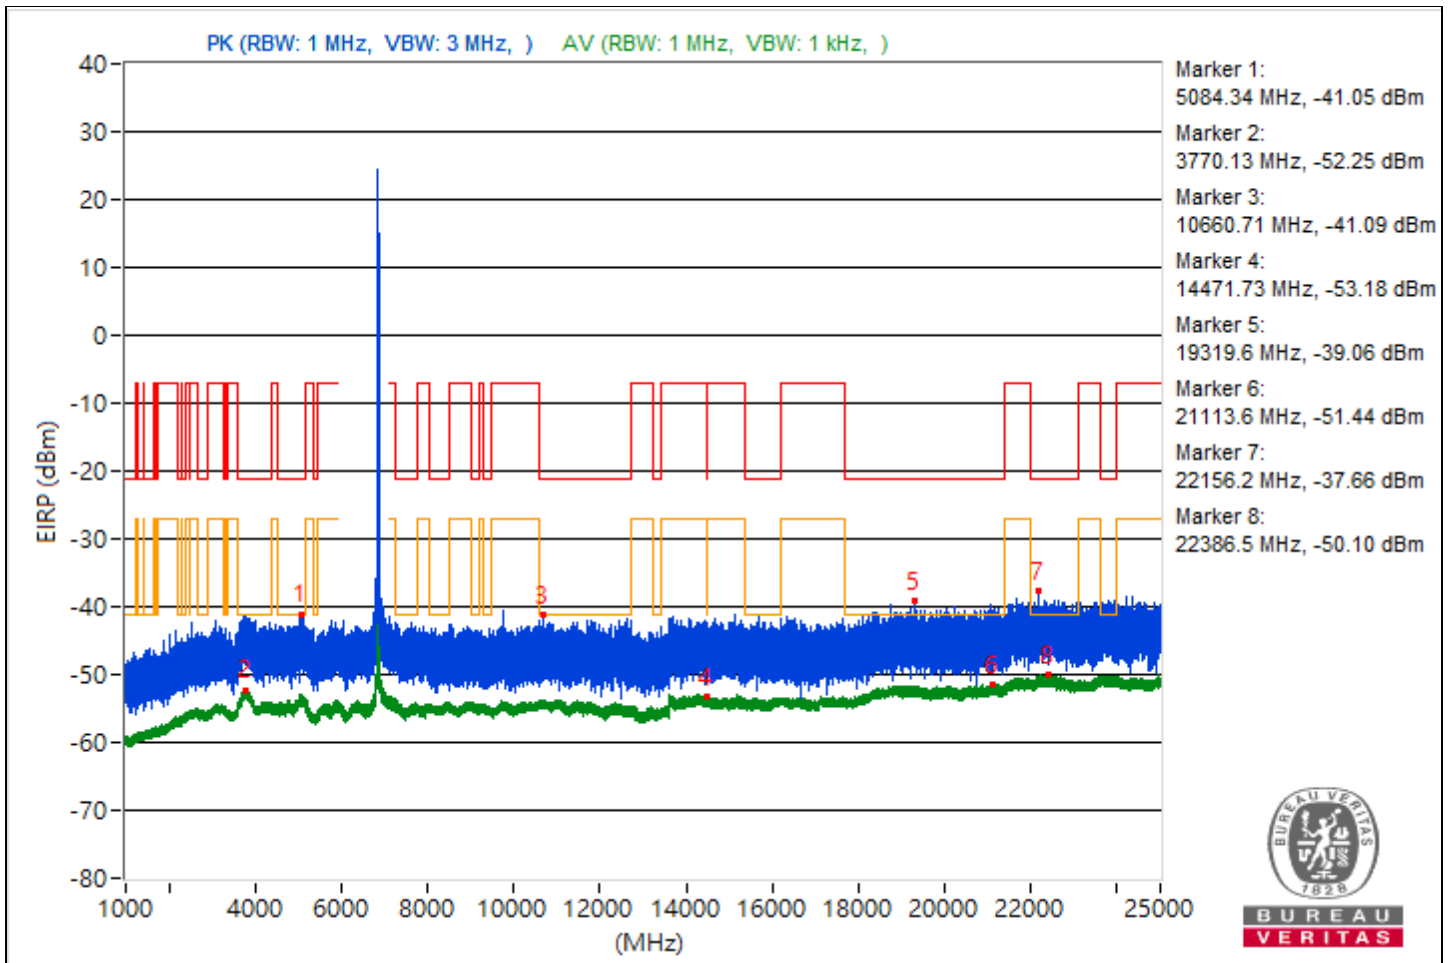

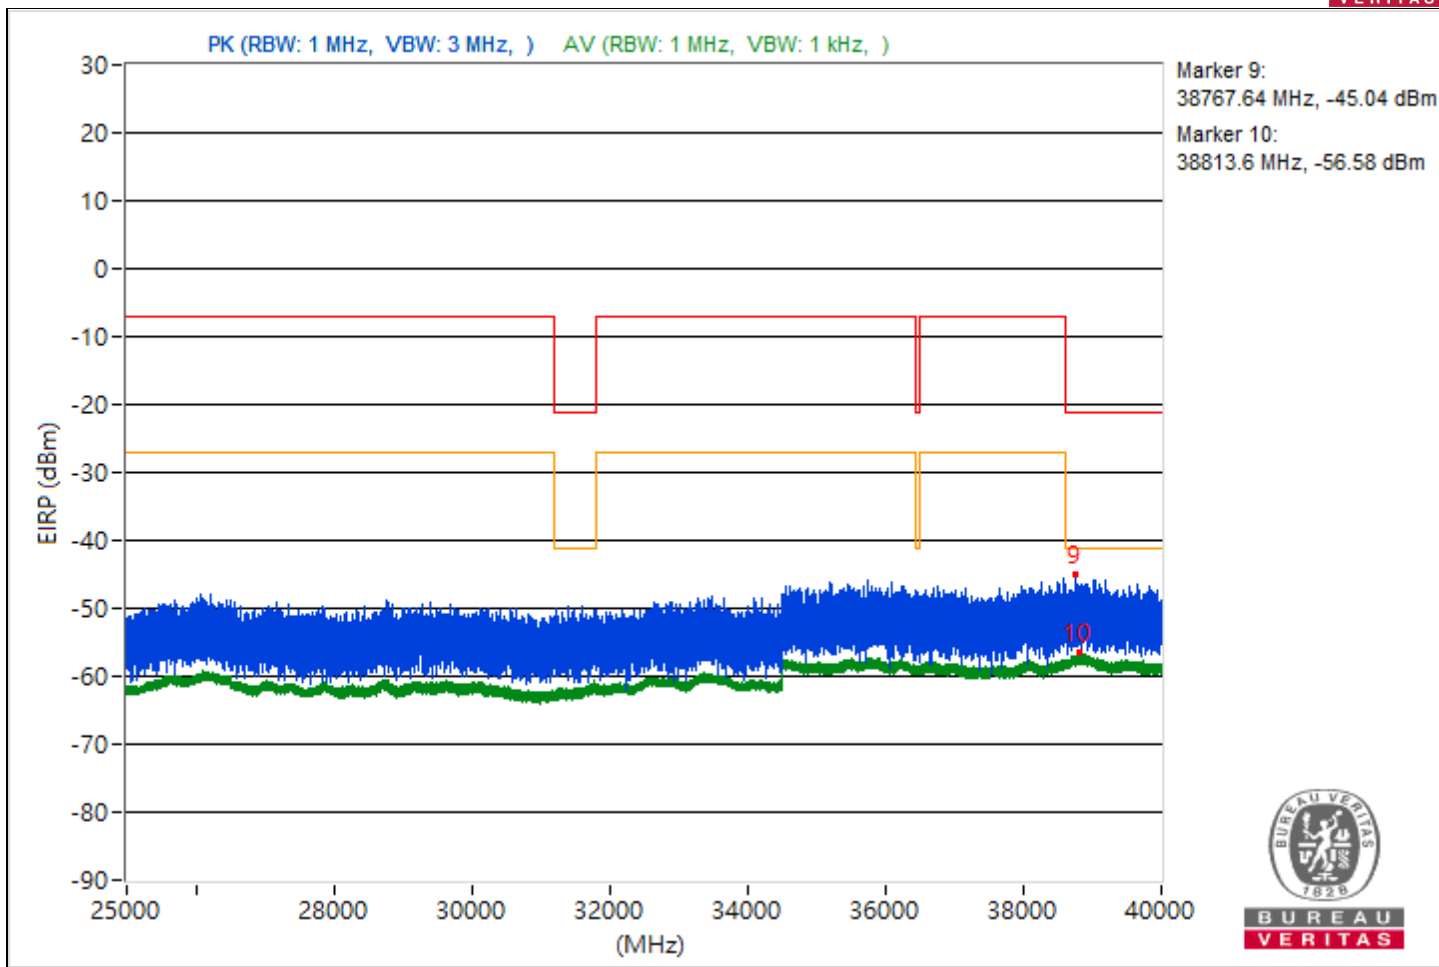





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4774.48	54.36 PK	74	-19.64	-45.82	4.92	-40.9
2	3789.58	42.93 AV	54	-11.07	-57.25	4.92	-52.33
3	7678.93	53.61 PK	74	-20.39	-46.57	4.92	-41.65
4	14470.76	42.03 AV	54	-11.97	-58.15	4.92	-53.23
5	19204.7	55.72 PK	74	-18.28	-44.46	4.92	-39.54
6	21198.1	43.88 AV	54	-10.12	-56.3	4.92	-51.38
7	23915.7	57.4 PK	74	-16.6	-42.78	4.92	-37.86
8	23696.3	45.16 AV	54	-8.84	-55.02	4.92	-50.1
9	38754.22	49.74 PK	74	-24.26	-50.44	4.92	-45.52
10	38822.31	38.51 AV	54	-15.49	-61.67	4.92	-56.75

Note: Margin value = Emission Level - Limit value

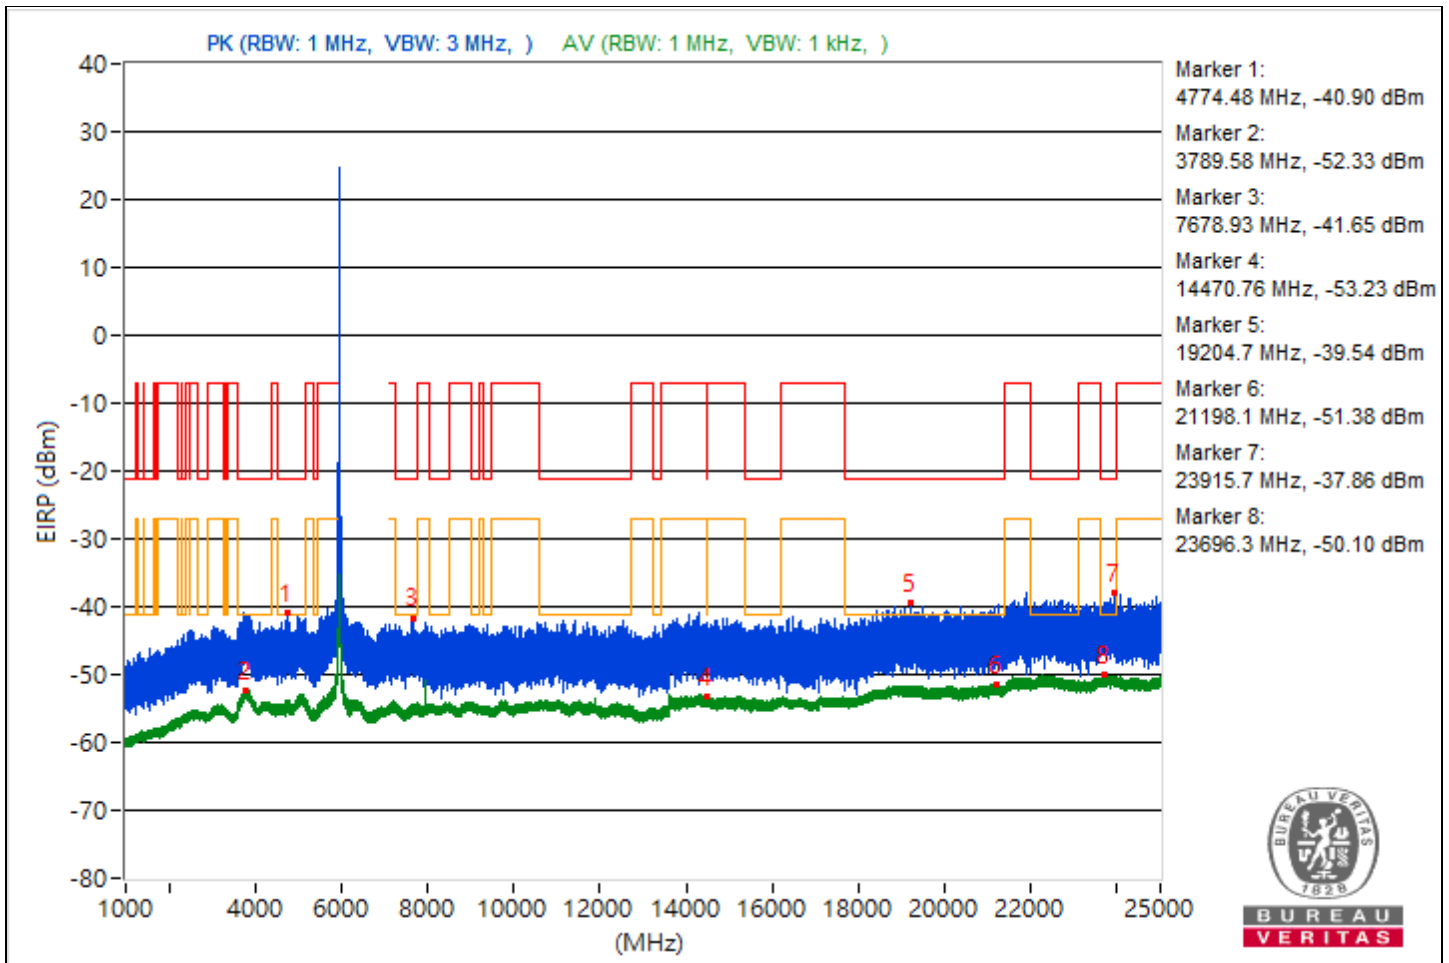

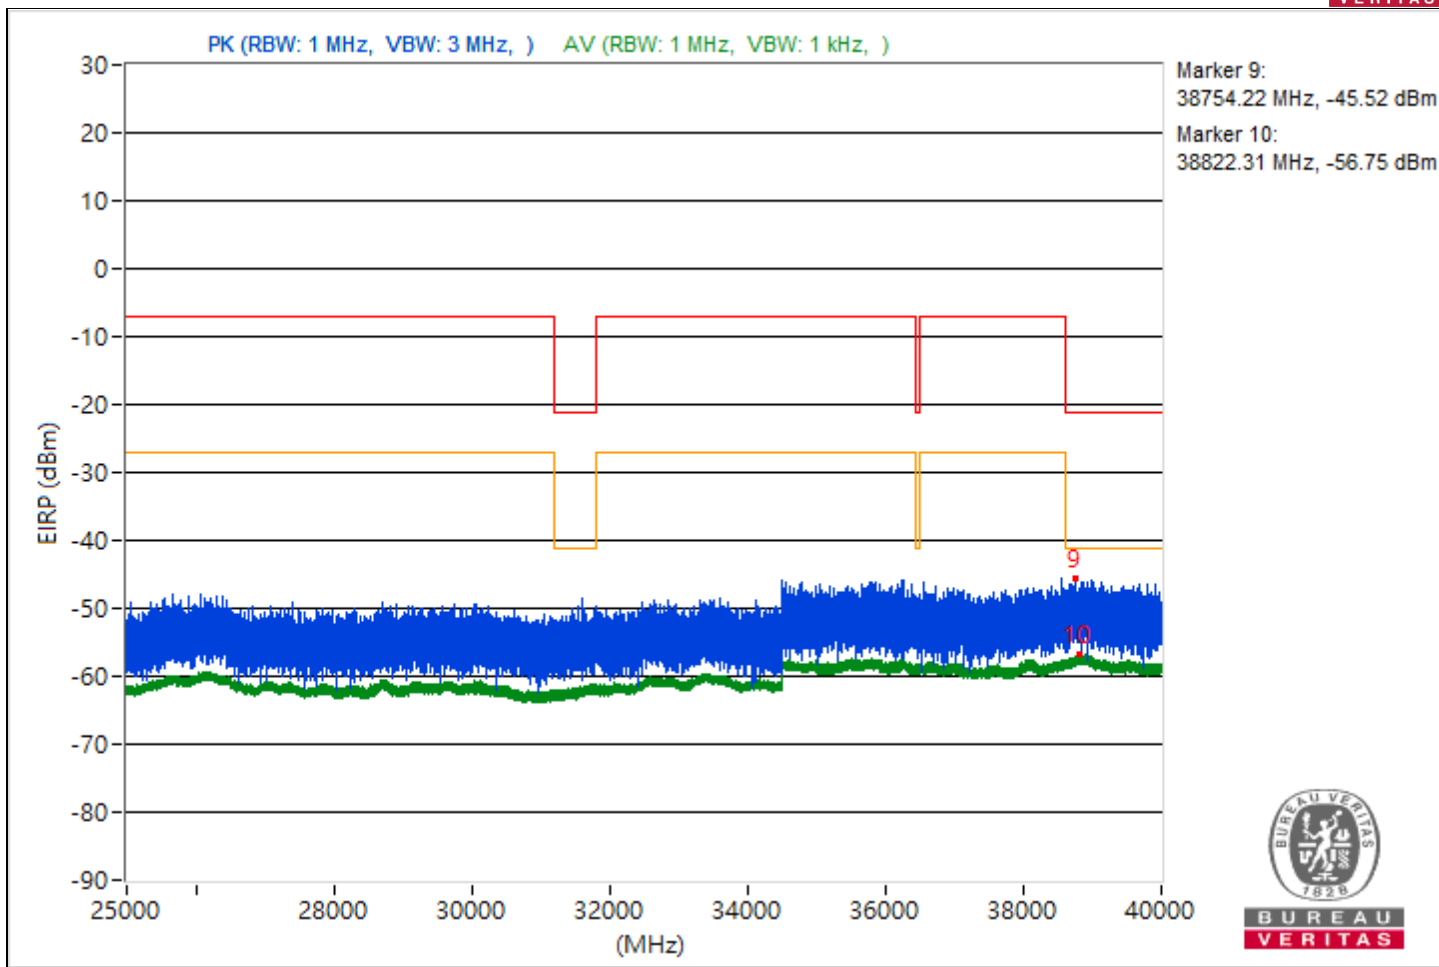





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.59	55.19 PK	74	-18.81	-44.99	4.92	-40.07
2	3829.71	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	10691.47	54.33 PK	74	-19.67	-45.85	4.92	-40.93
4	14482.4	41.8 AV	54	-12.2	-58.38	4.92	-53.46
5	21270.3	55.87 PK	74	-18.13	-44.31	4.92	-39.39
6	21130.9	43.72 AV	54	-10.28	-56.46	4.92	-51.54
7	22791.6	58.67 PK	74	-15.33	-41.51	4.92	-36.59
8	22210.3	45.14 AV	54	-8.86	-55.04	4.92	-50.12
9	38892.36	51.56 PK	74	-22.44	-48.62	4.92	-43.7
10	38802.67	38.7 AV	54	-15.3	-61.48	4.92	-56.56

Note: Margin value = Emission Level - Limit value

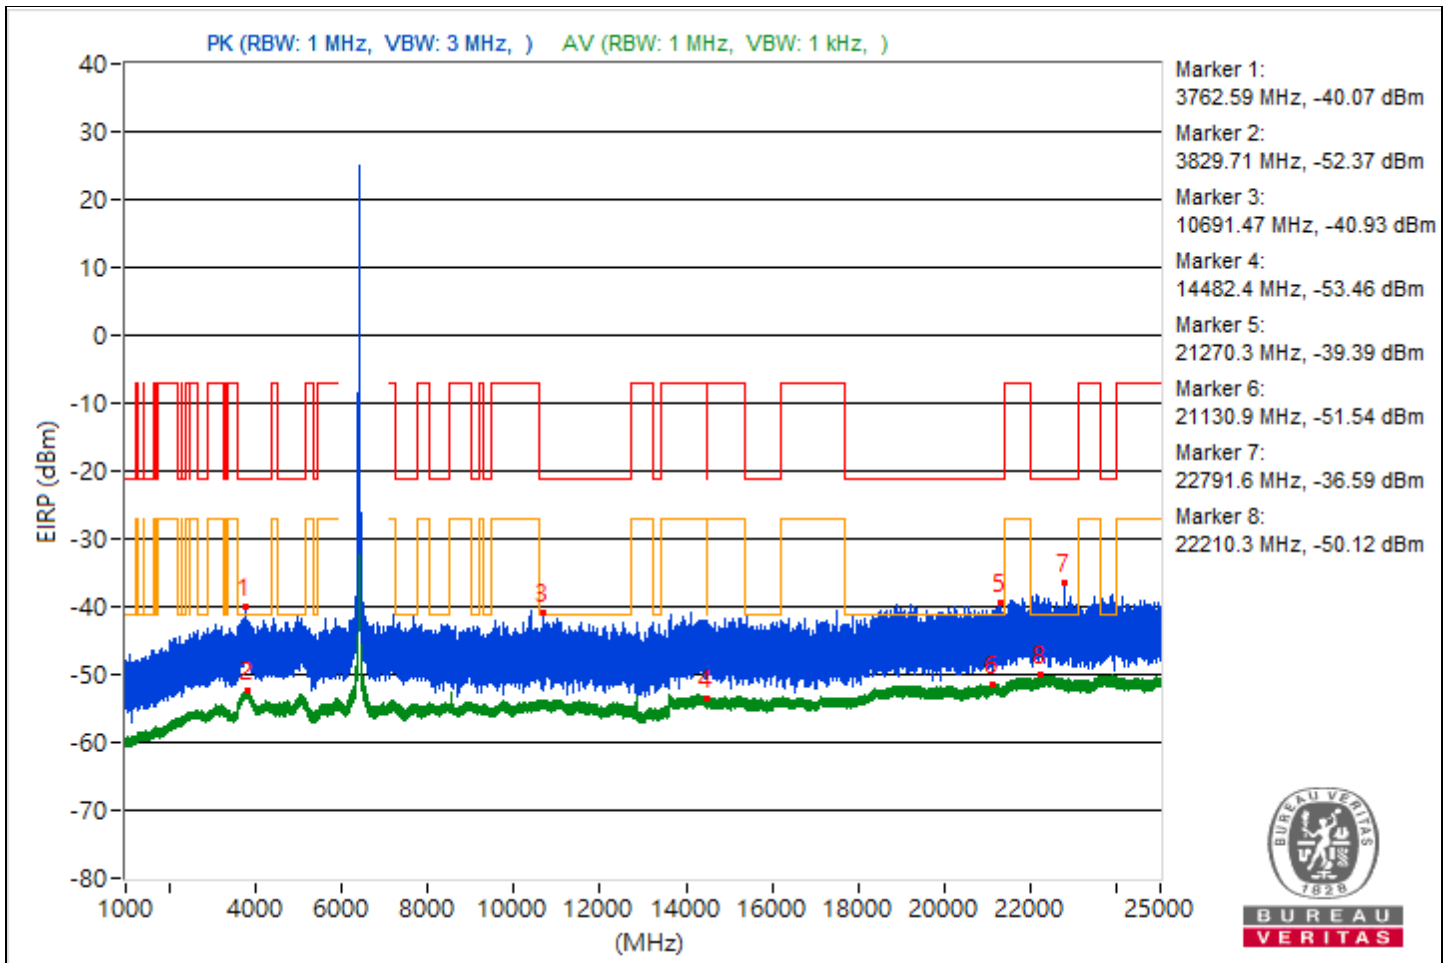

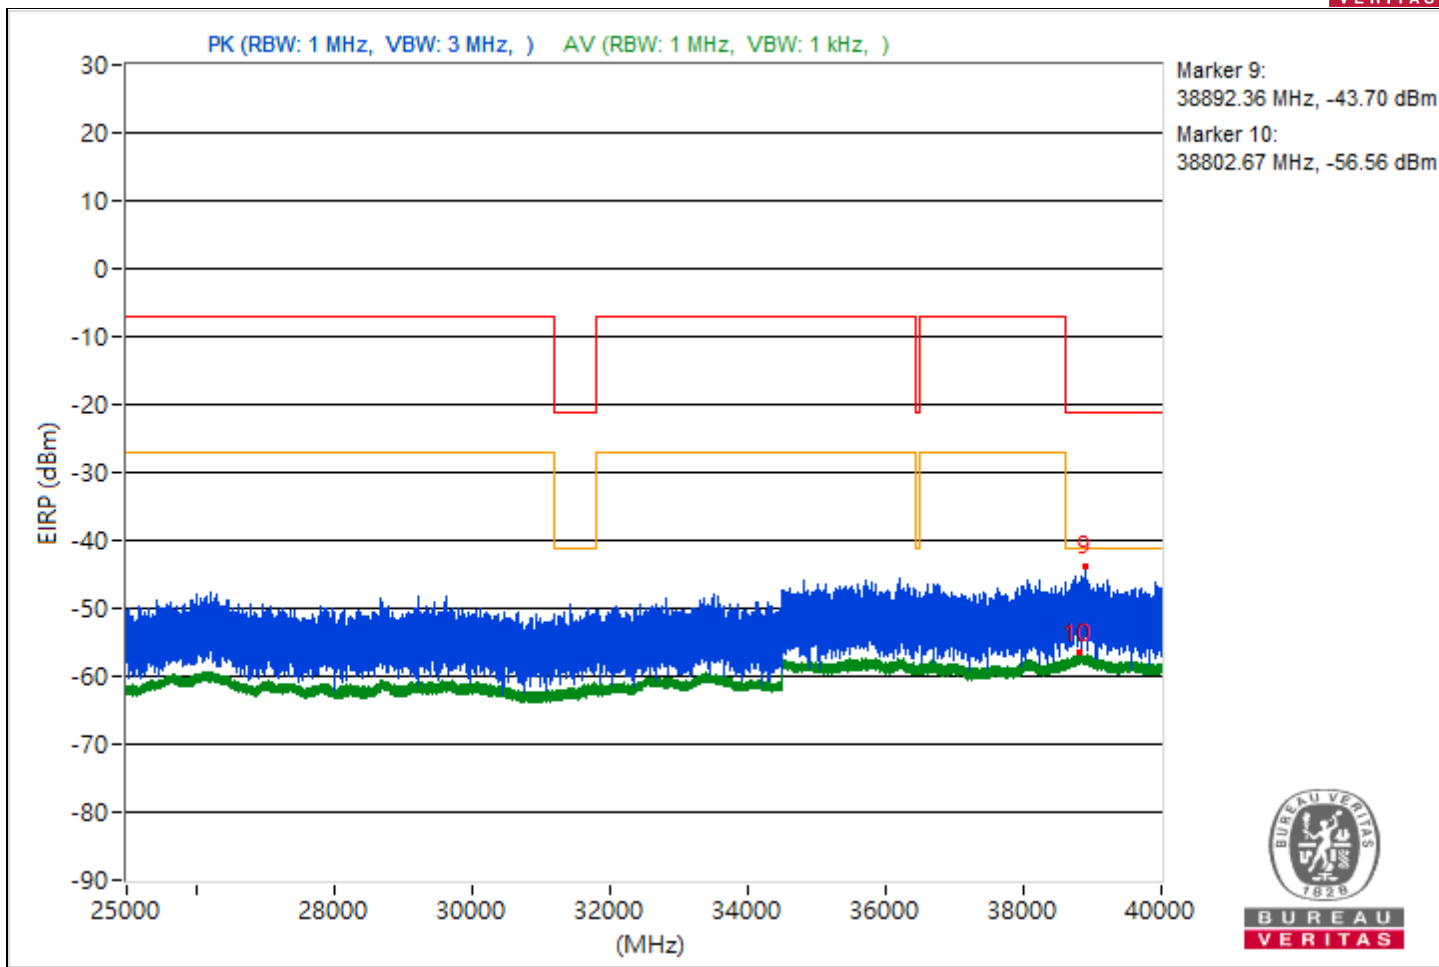





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.03	55.22 PK	74	-18.78	-44.96	4.92	-40.04
2	3804.59	42.9 AV	54	-11.1	-57.28	4.92	-52.36
3	14480.71	53.79 PK	74	-20.21	-46.39	4.92	-41.47
4	14483.29	41.81 AV	54	-12.19	-58.37	4.92	-53.45
5	20687.1	55.36 PK	74	-18.64	-44.82	4.92	-39.9
6	21180.9	43.83 AV	54	-10.17	-56.35	4.92	-51.43
7	22460.6	57.63 PK	74	-16.37	-42.55	4.92	-37.63
8	22209.2	45.22 AV	54	-8.78	-54.96	4.92	-50.04
9	38825.51	49.74 PK	74	-24.26	-50.44	4.92	-45.52
10	38831.29	38.64 AV	54	-15.36	-61.54	4.92	-56.62

Note: Margin value = Emission Level - Limit value

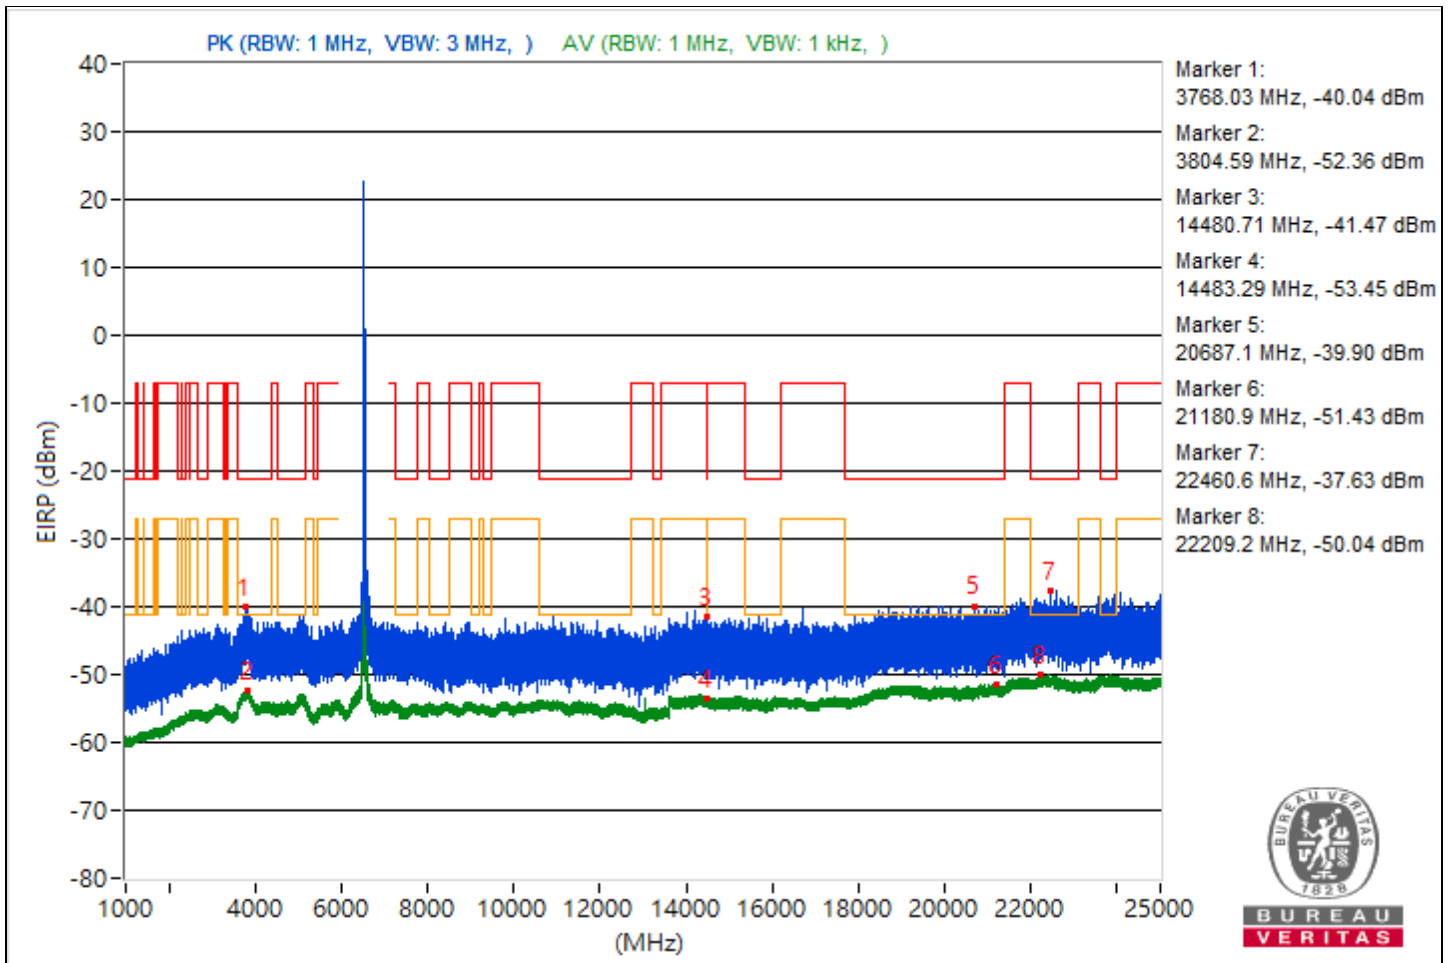

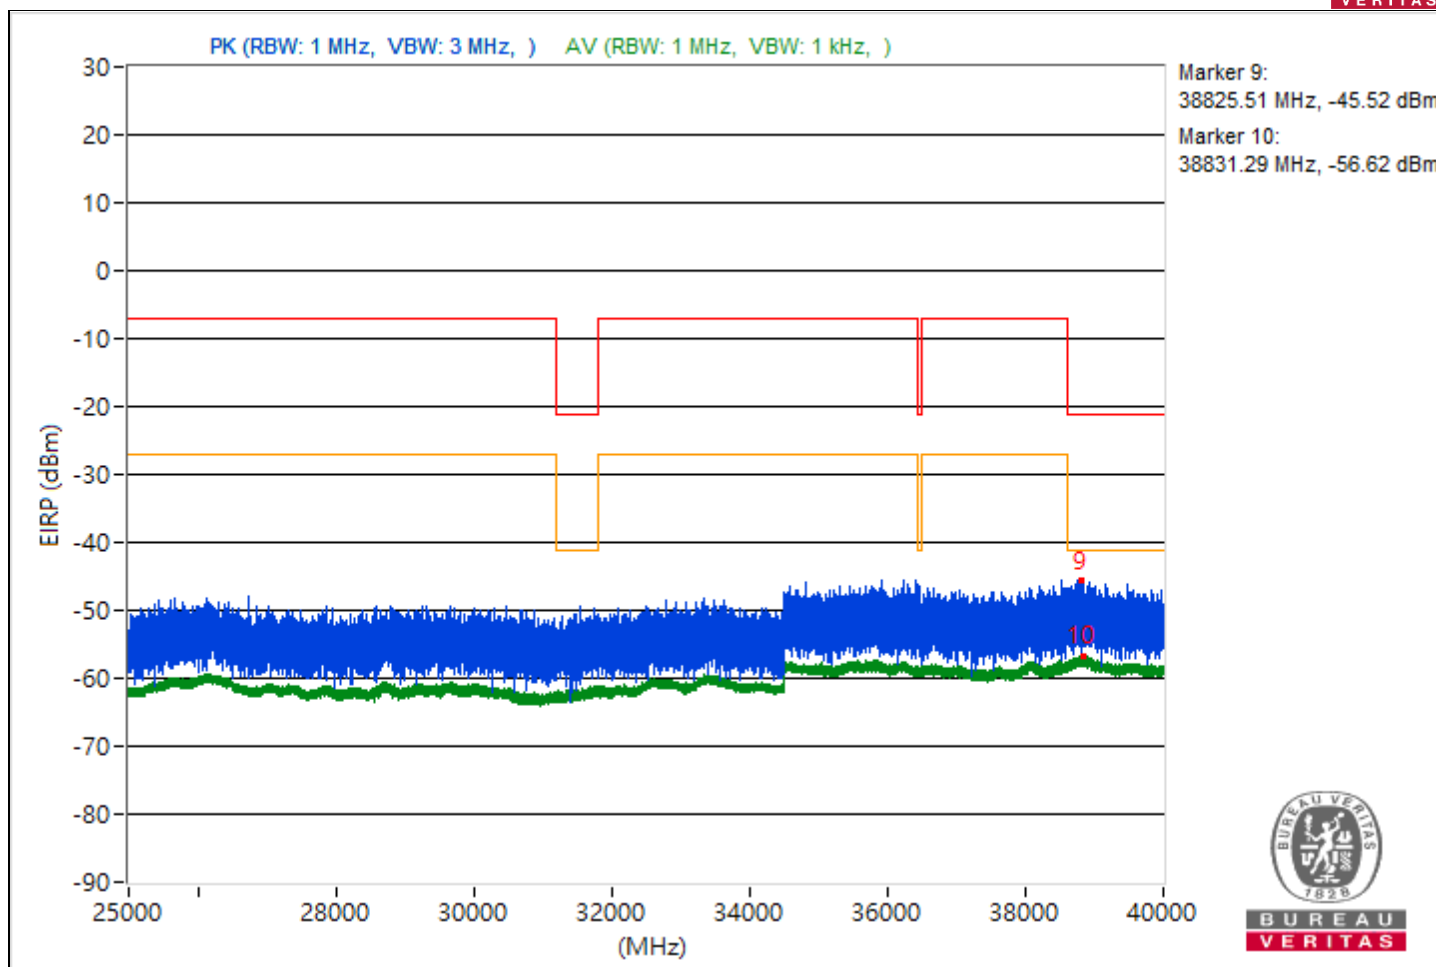





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5074.23	54.78 PK	74	-19.22	-45.4	4.92	-40.48
2	3817.34	43.02 AV	54	-10.98	-57.16	4.92	-52.24
3	15637.69	54.84 PK	74	-19.16	-45.34	4.92	-40.42
4	14474.13	42.18 AV	54	-11.82	-58	4.92	-53.08
5	21092.2	55.86 PK	74	-18.14	-44.32	4.92	-39.4
6	21356.8	43.97 AV	54	-10.03	-56.21	4.92	-51.29
7	22395.9	56.82 PK	74	-17.18	-43.36	4.92	-38.44
8	23691.8	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	39219.2	49.22 PK	74	-24.78	-50.96	4.92	-46.04
10	38802.31	38.77 AV	54	-15.23	-61.41	4.92	-56.49

Note: Margin value = Emission Level - Limit value

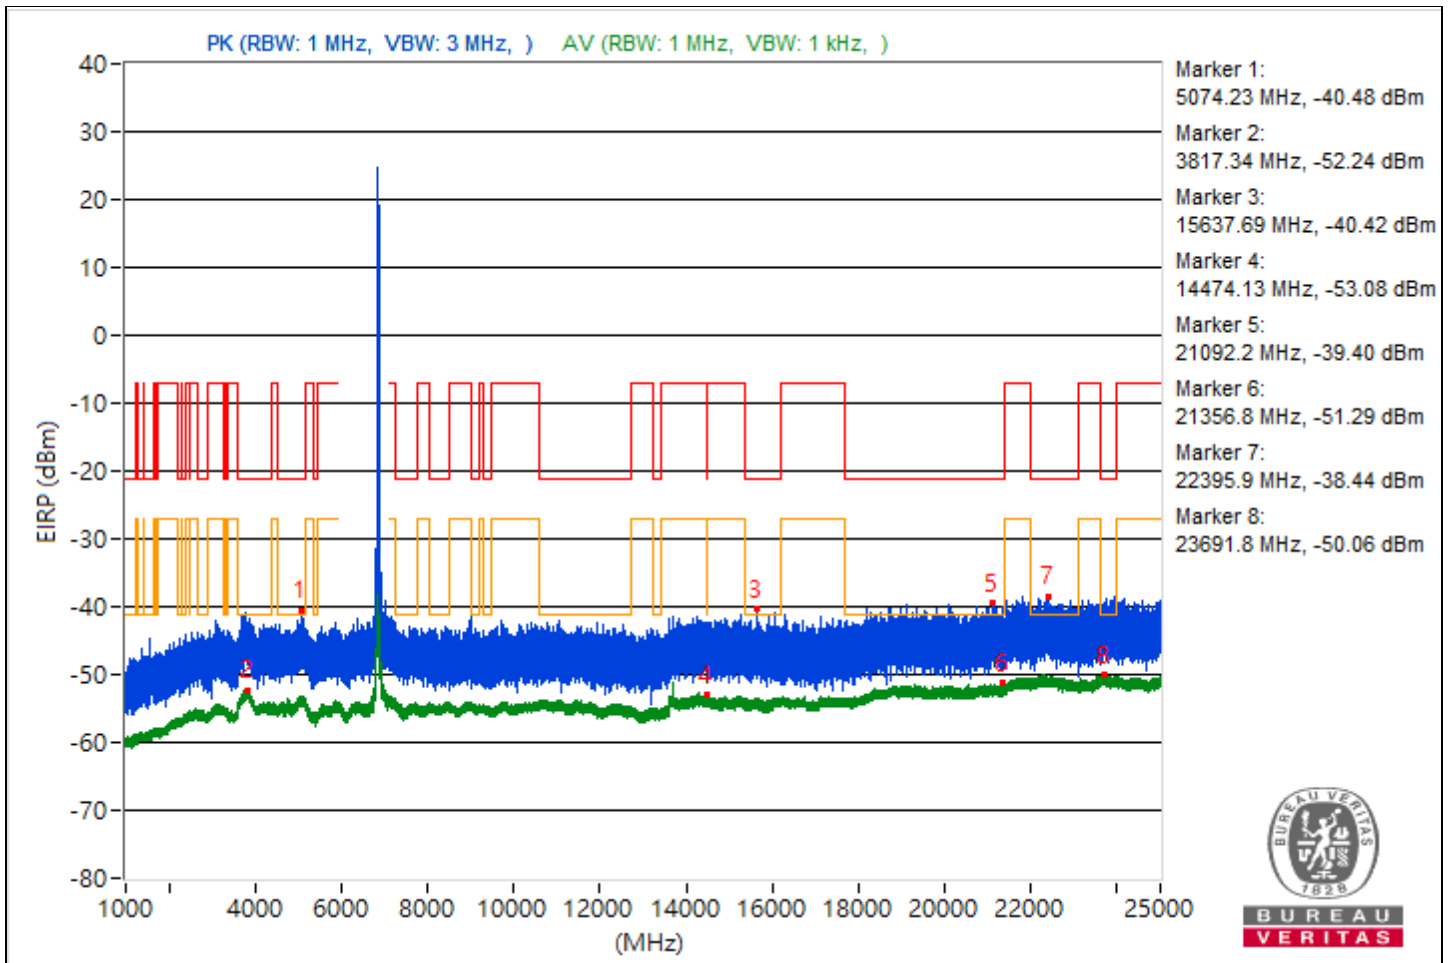


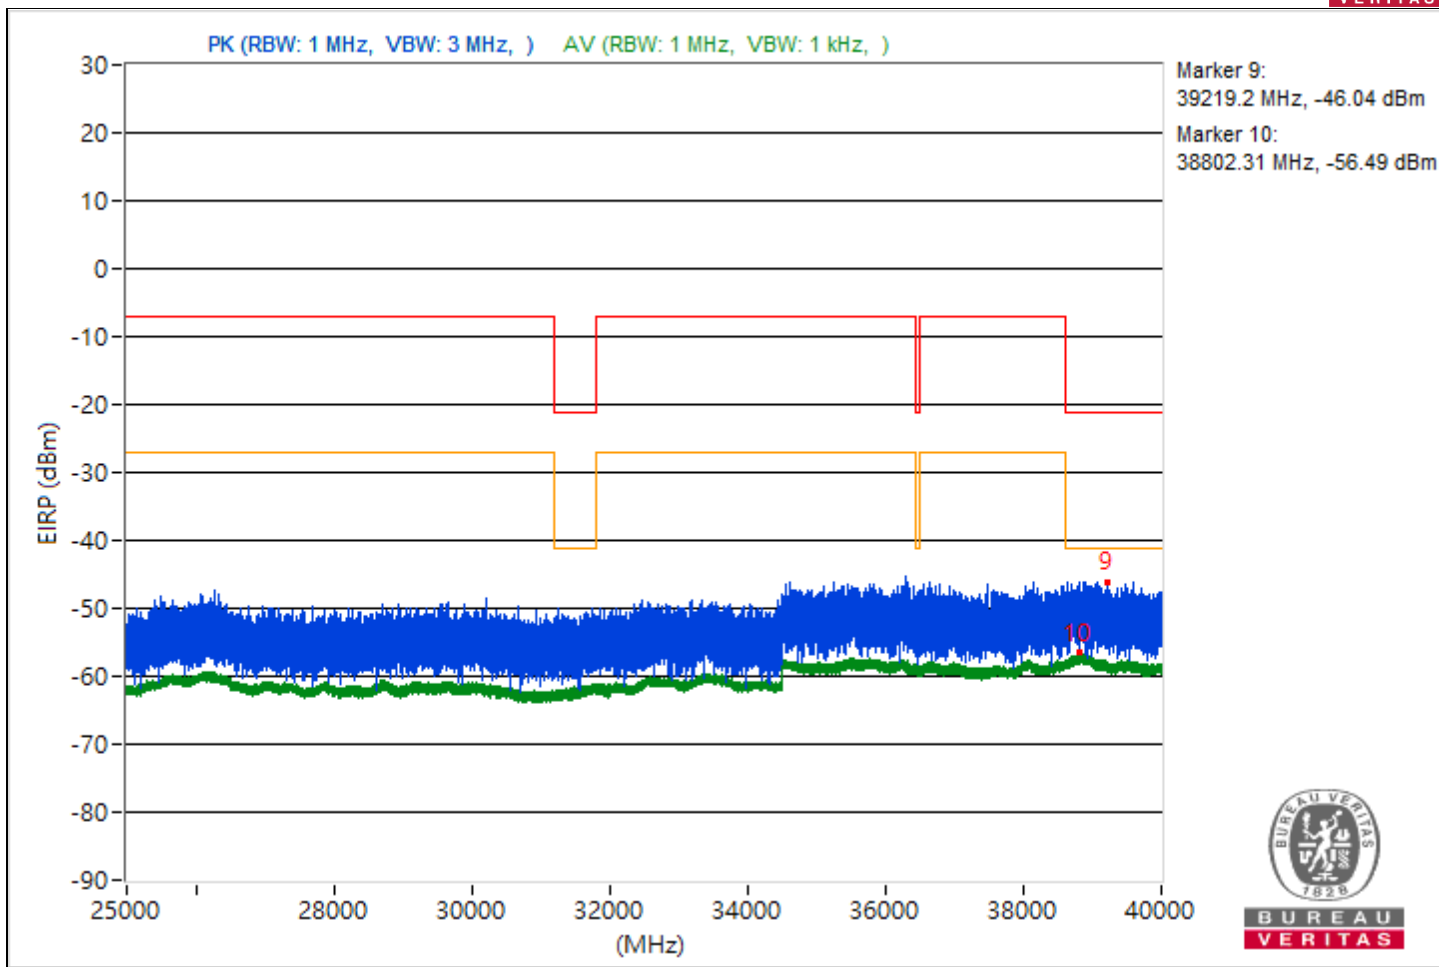


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.79	54.73 PK	74	-19.27	-45.45	4.92	-40.53
2	3780.79	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	11898.93	53.89 PK	74	-20.11	-46.29	4.92	-41.37
4	11902.13	41.99 AV	54	-12.01	-58.19	4.92	-53.27
5	19083.9	56.01 PK	74	-17.99	-44.17	4.92	-39.25
6	21121.6	43.88 AV	54	-10.12	-56.3	4.92	-51.38
7	22384.5	57.28 PK	74	-16.72	-42.9	4.92	-37.98
8	22245.1	45.13 AV	54	-8.87	-55.05	4.92	-50.13
9	38848.44	50.9 PK	74	-23.1	-49.28	4.92	-44.36
10	38780.53	38.63 AV	54	-15.37	-61.55	4.92	-56.63

Note: Margin value = Emission Level - Limit value

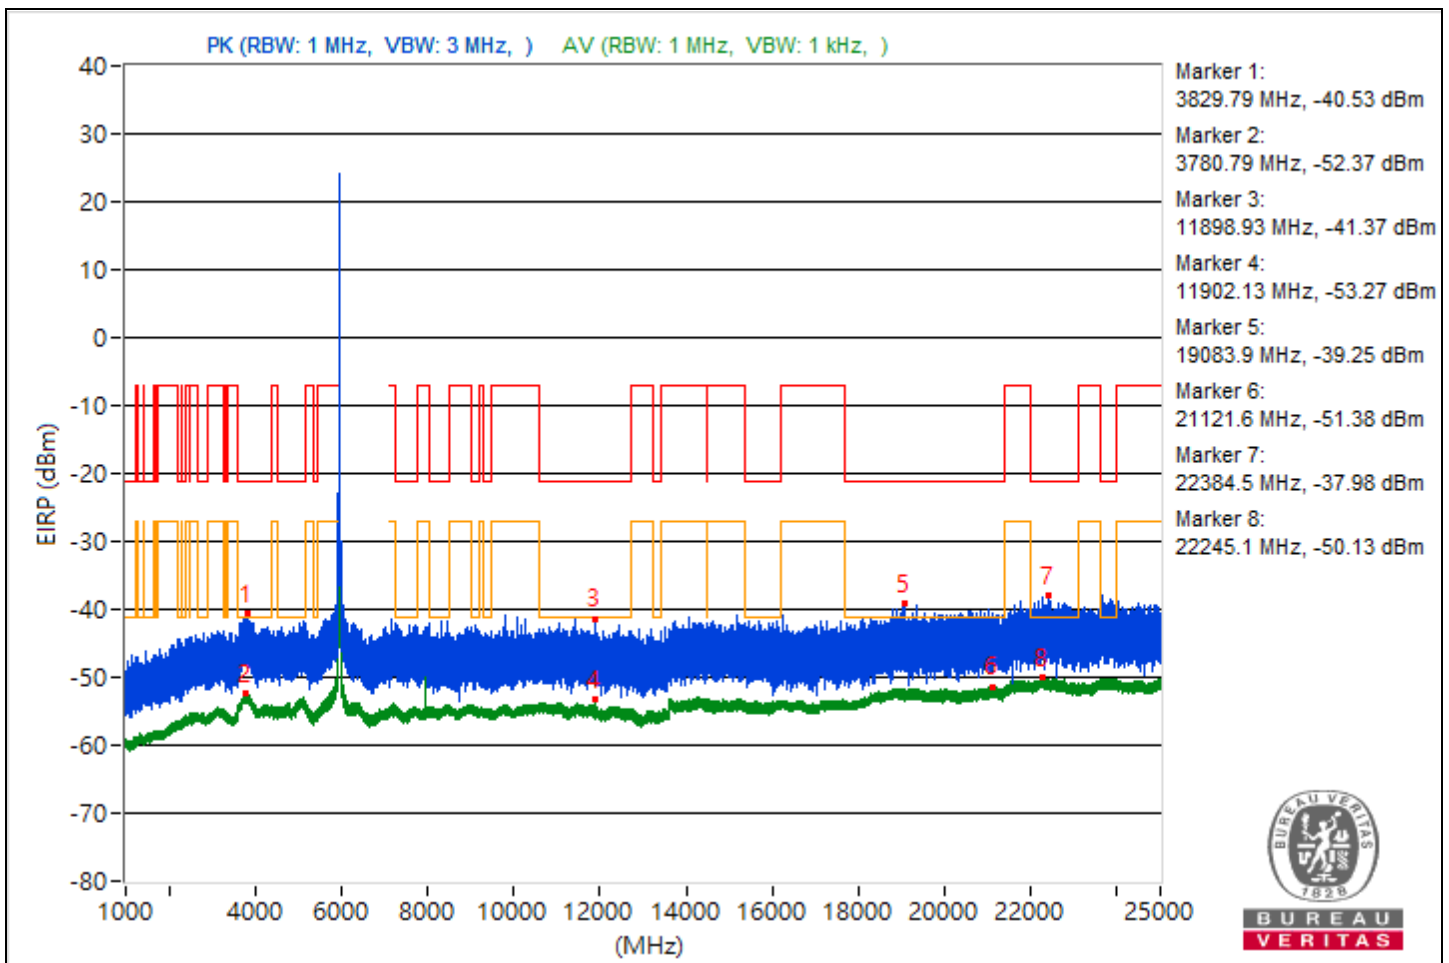


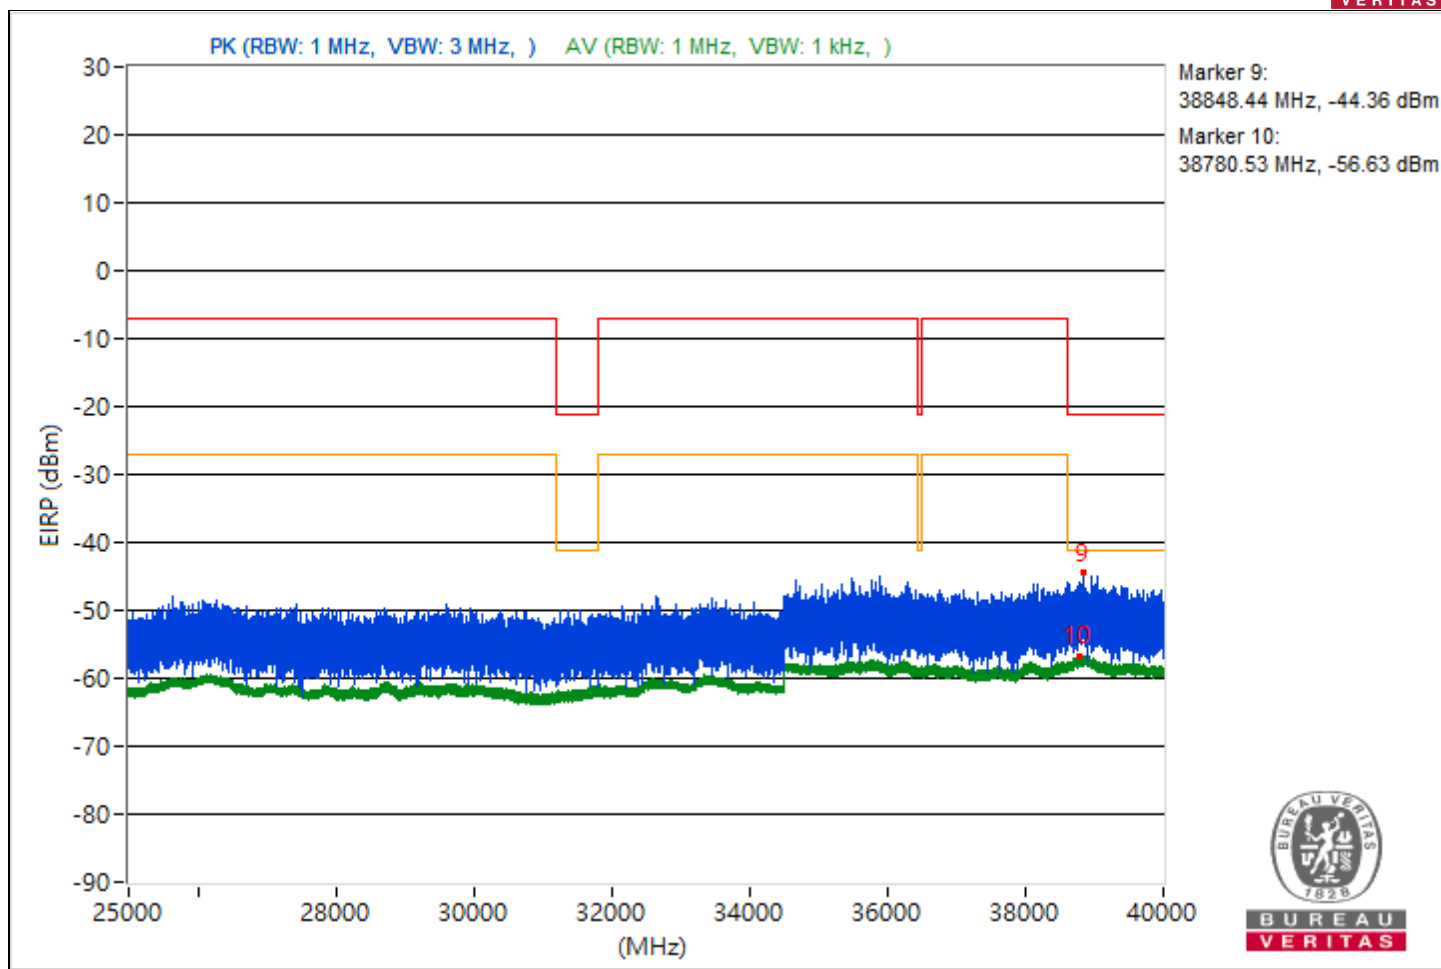


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.16	54.61 PK	74	-19.39	-45.57	4.92	-40.65
2	3778.38	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	7697.06	54.37 PK	74	-19.63	-45.81	4.92	-40.89
4	14480.18	41.96 AV	54	-12.04	-58.22	4.92	-53.3
5	21338.4	56.18 PK	74	-17.82	-44	4.92	-39.08
6	21122.3	43.93 AV	54	-10.07	-56.25	4.92	-51.33
7	22295.8	57.02 PK	74	-16.98	-43.16	4.92	-38.24
8	23984.6	45.2 AV	54	-8.8	-54.98	4.92	-50.06
9	38764.71	50.56 PK	74	-23.44	-49.62	4.92	-44.7
10	38765.16	38.55 AV	54	-15.45	-61.63	4.92	-56.71

Note: Margin value = Emission Level - Limit value

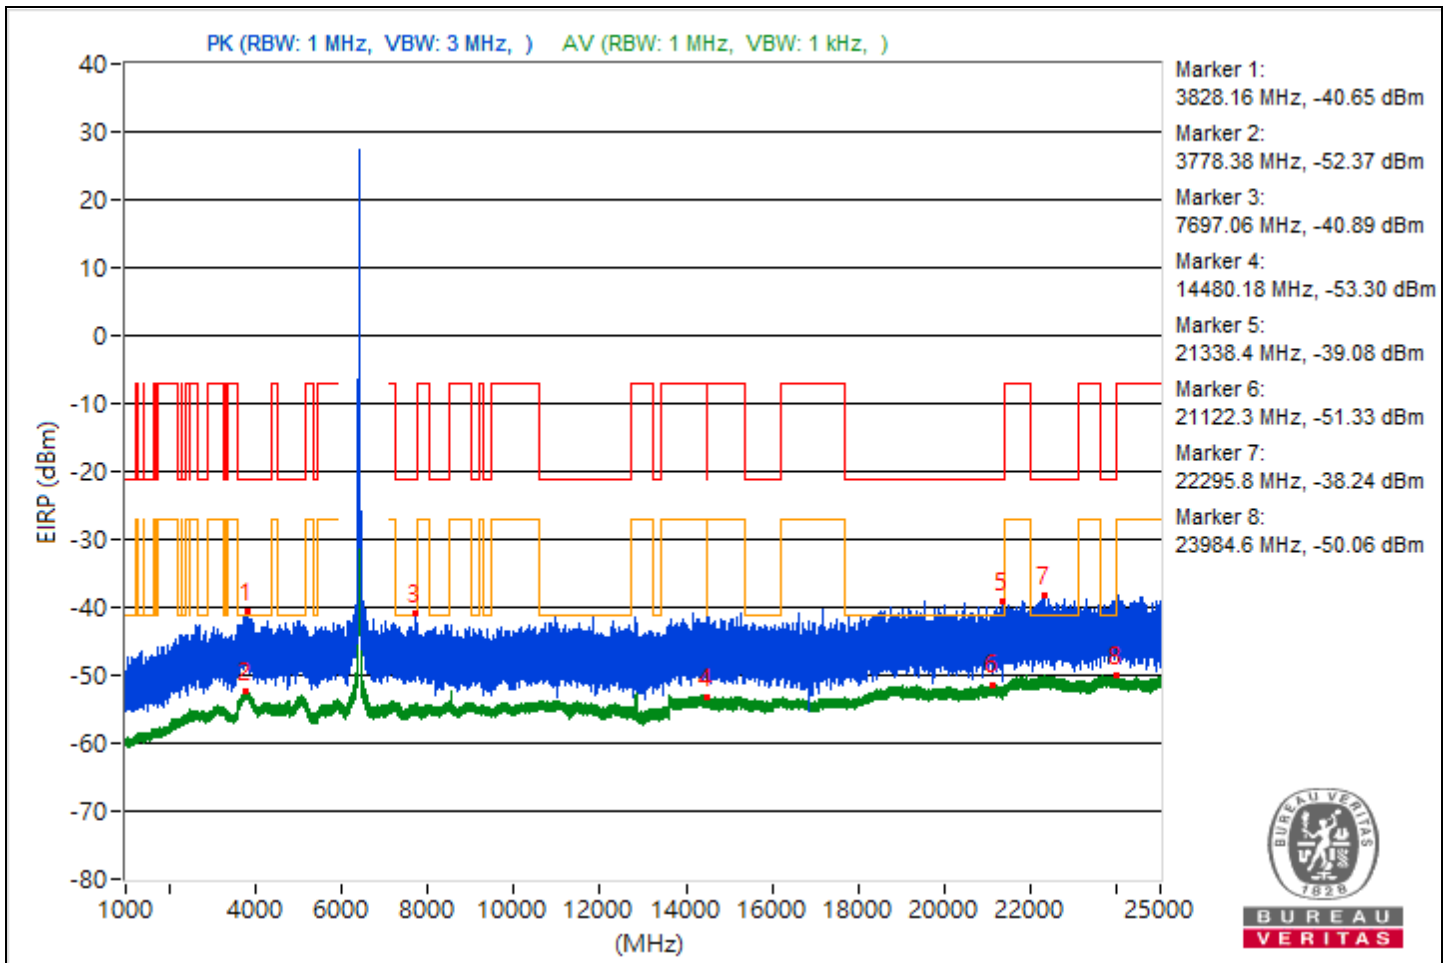


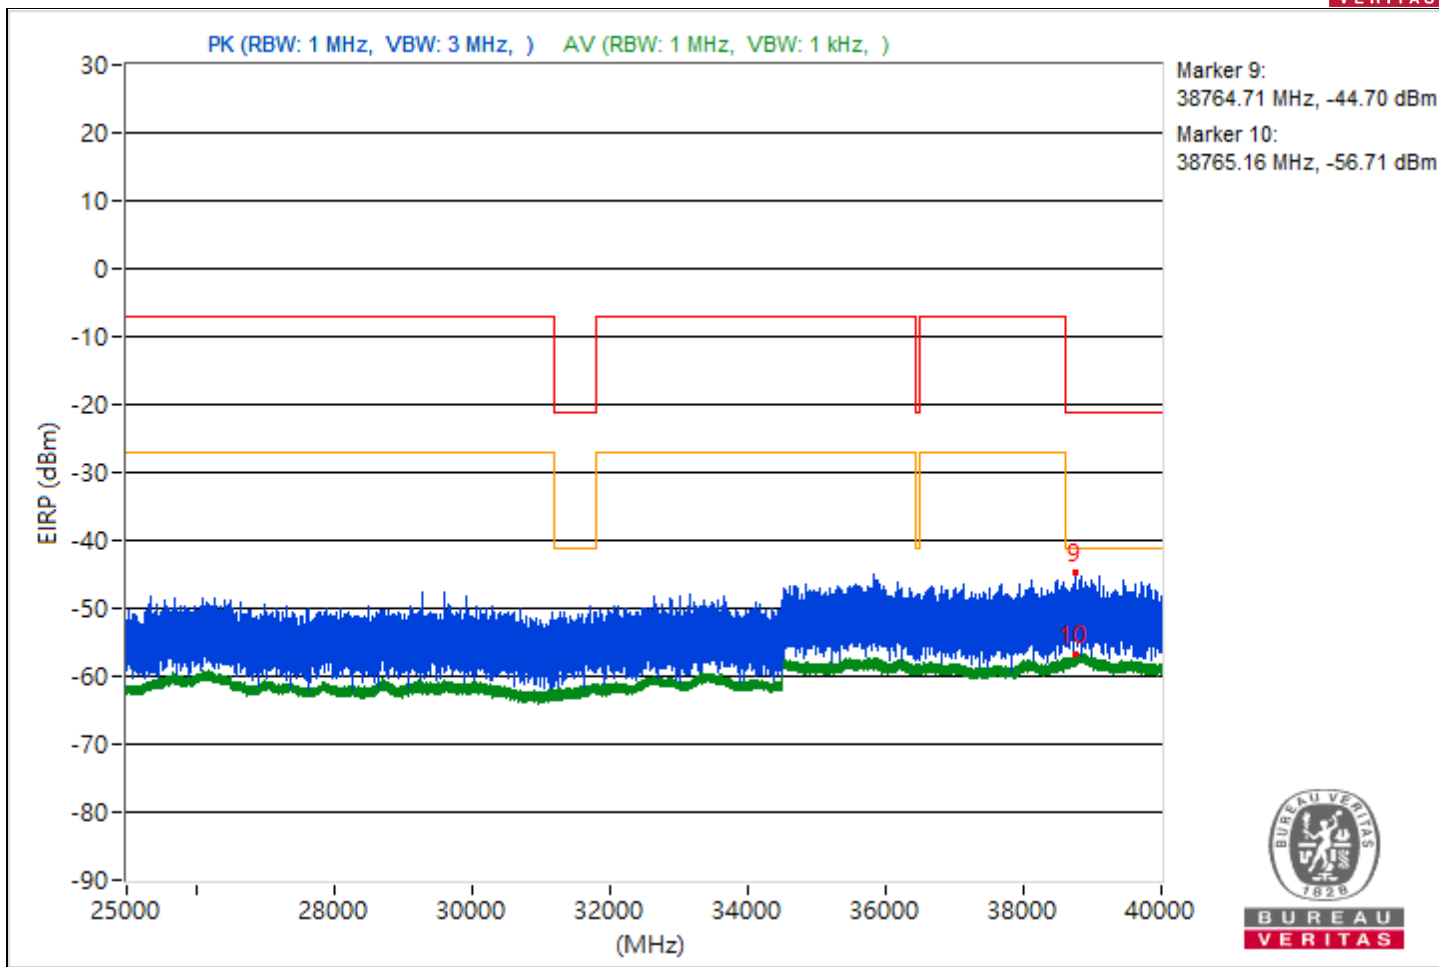


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3751.62	54.18 PK	74	-19.82	-46	4.92	-41.08
2	3817.81	42.87 AV	54	-11.13	-57.31	4.92	-52.39
3	15737.6	53.63 PK	74	-20.37	-46.55	4.92	-41.63
4	15630.58	41.88 AV	54	-12.12	-58.3	4.92	-53.38
5	21173.8	55.89 PK	74	-18.11	-44.29	4.92	-39.37
6	21162.9	43.86 AV	54	-10.14	-56.32	4.92	-51.4
7	23647.1	57.8 PK	74	-16.2	-42.38	4.92	-37.46
8	23631.8	45.17 AV	54	-8.83	-55.01	4.92	-50.09
9	38689.69	50.95 PK	74	-23.05	-49.23	4.92	-44.31
10	38782.93	38.54 AV	54	-15.46	-61.64	4.92	-56.72

Note: Margin value = Emission Level - Limit value

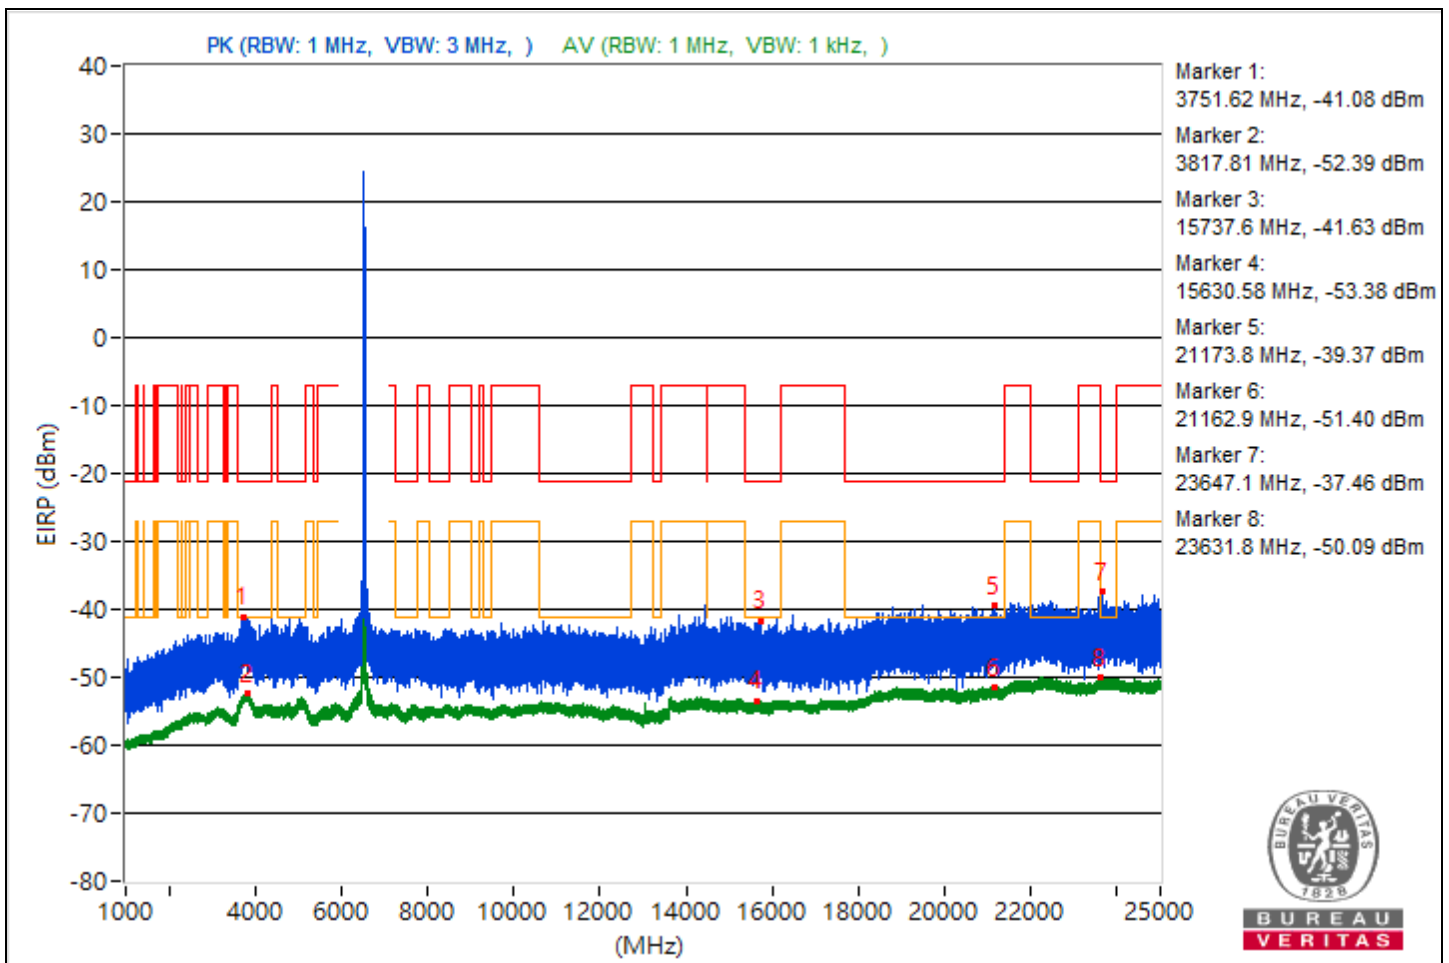

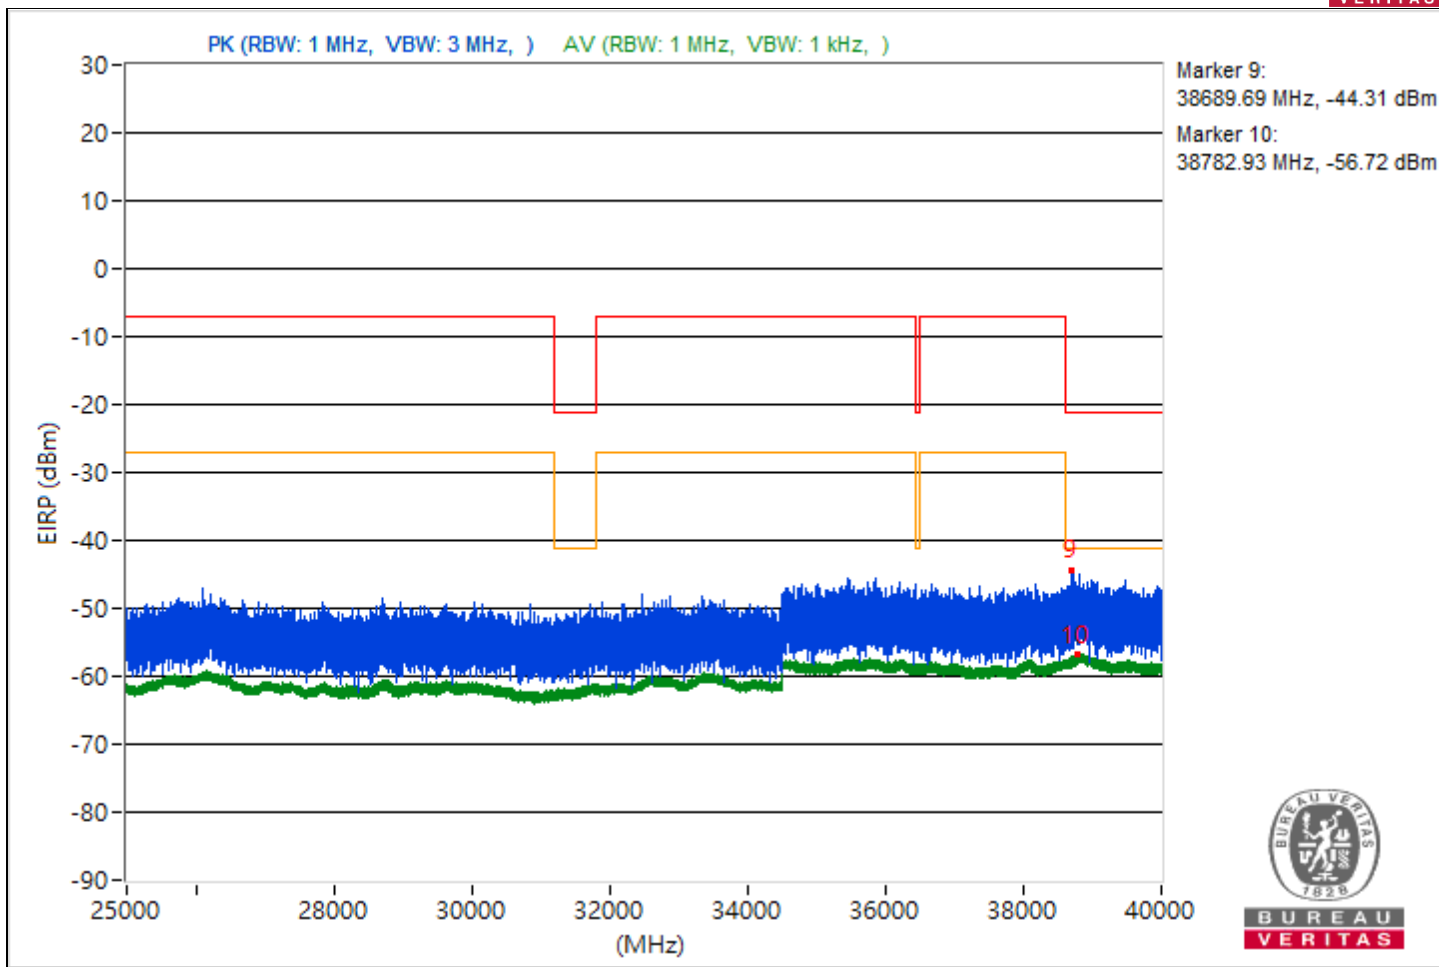





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5048.49	54.18 PK	74	-19.82	-46	4.92	-41.08
2	3788.49	43 AV	54	-11	-57.18	4.92	-52.26
3	15572.27	53.87 PK	74	-20.13	-46.31	4.92	-41.39
4	14486.76	41.85 AV	54	-12.15	-58.33	4.92	-53.41
5	19934.5	55.5 PK	74	-18.5	-44.68	4.92	-39.76
6	21091.3	43.89 AV	54	-10.11	-56.29	4.92	-51.37
7	23979.9	56.98 PK	74	-17.02	-43.2	4.92	-38.28
8	22512.8	45.18 AV	54	-8.82	-55	4.92	-50.08
9	38779.11	50.55 PK	74	-23.45	-49.63	4.92	-44.71
10	38833.33	38.66 AV	54	-15.34	-61.52	4.92	-56.6

Note: Margin value = Emission Level - Limit value

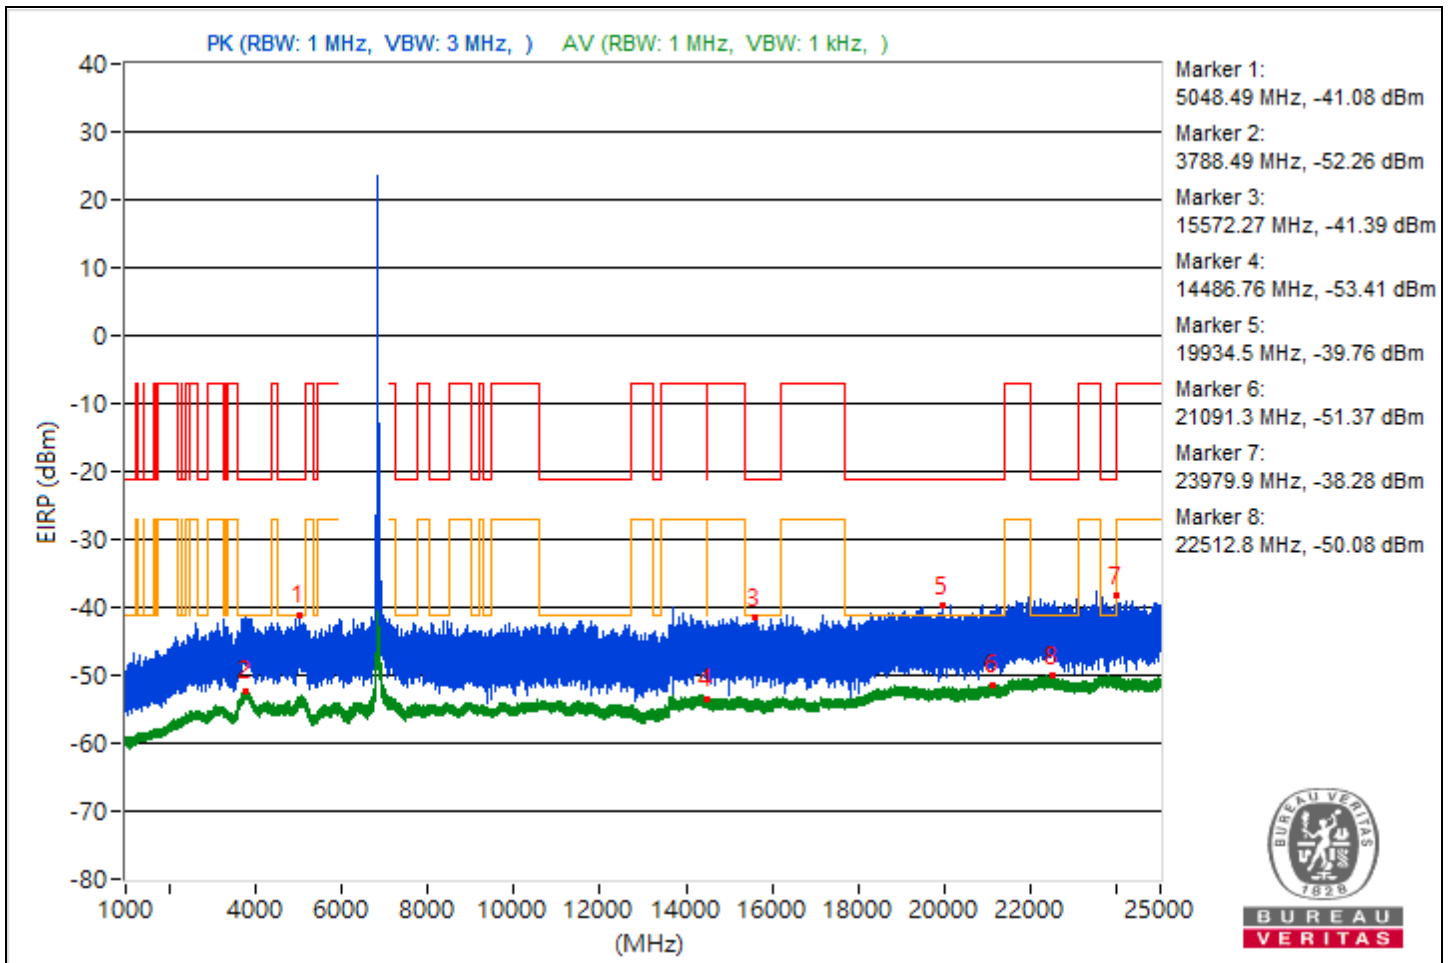

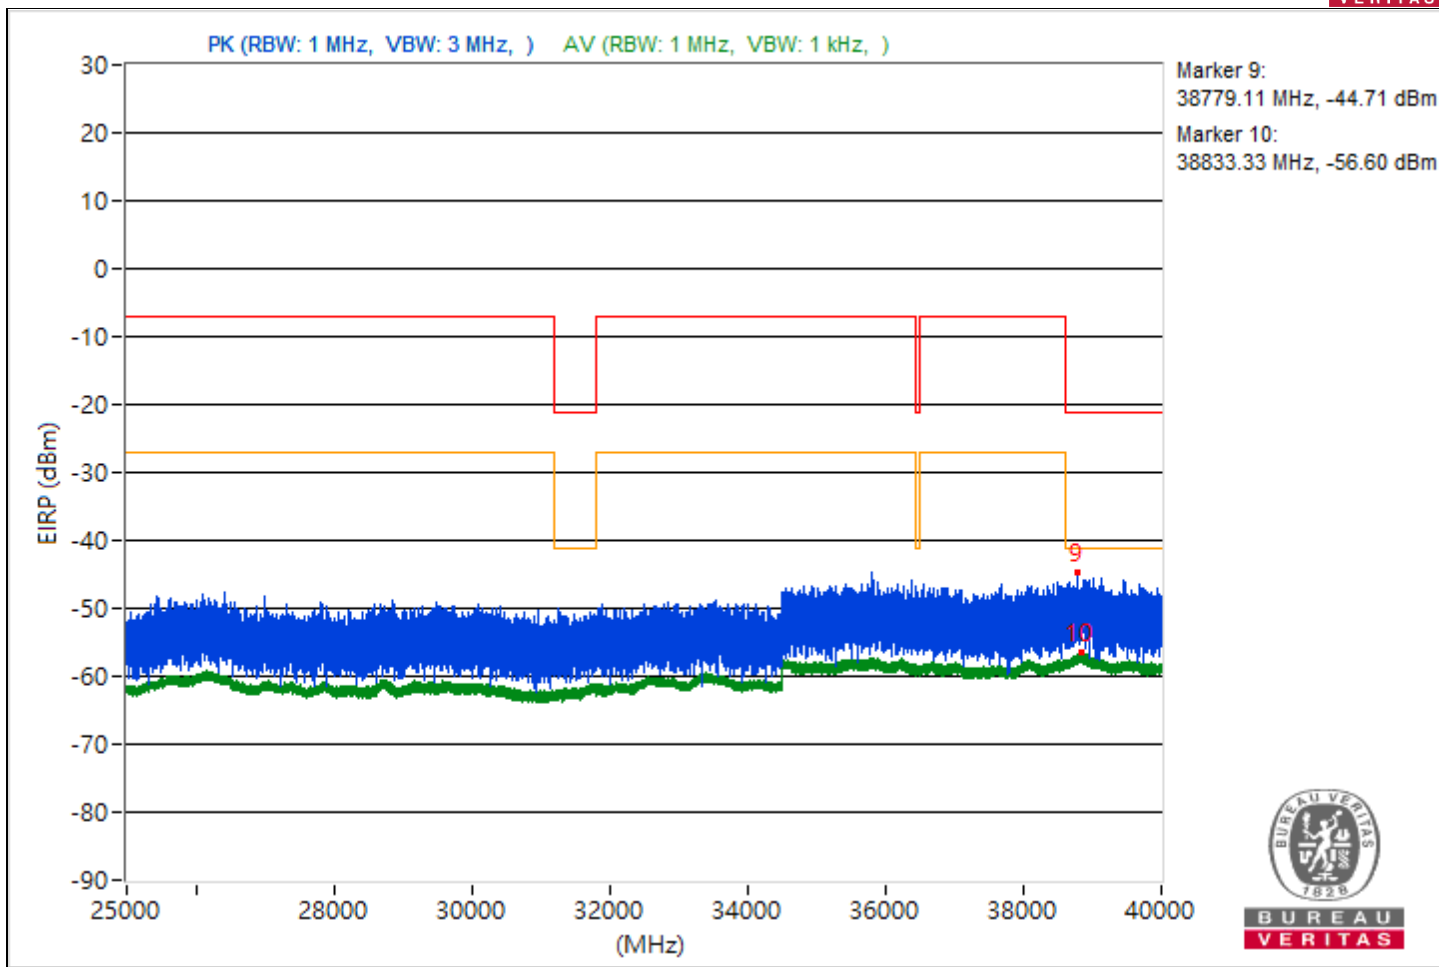





RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3753.57	54.05 PK	74	-19.95	-46.13	4.92	-41.21
2	3816.88	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	10623.2	54 PK	74	-20	-46.18	4.92	-41.26
4	11903.91	42.2 AV	54	-11.8	-57.98	4.92	-53.06
5	18801	55.93 PK	74	-18.07	-44.25	4.92	-39.33
6	21143.8	43.88 AV	54	-10.12	-56.3	4.92	-51.38
7	23636.9	57.34 PK	74	-16.66	-42.84	4.92	-37.92
8	23834.4	45.22 AV	54	-8.78	-54.96	4.92	-50.04
9	38850.84	50.17 PK	74	-23.83	-50.01	4.92	-45.09
10	38829.33	38.61 AV	54	-15.39	-61.57	4.92	-56.65

Note: Margin value = Emission Level - Limit value

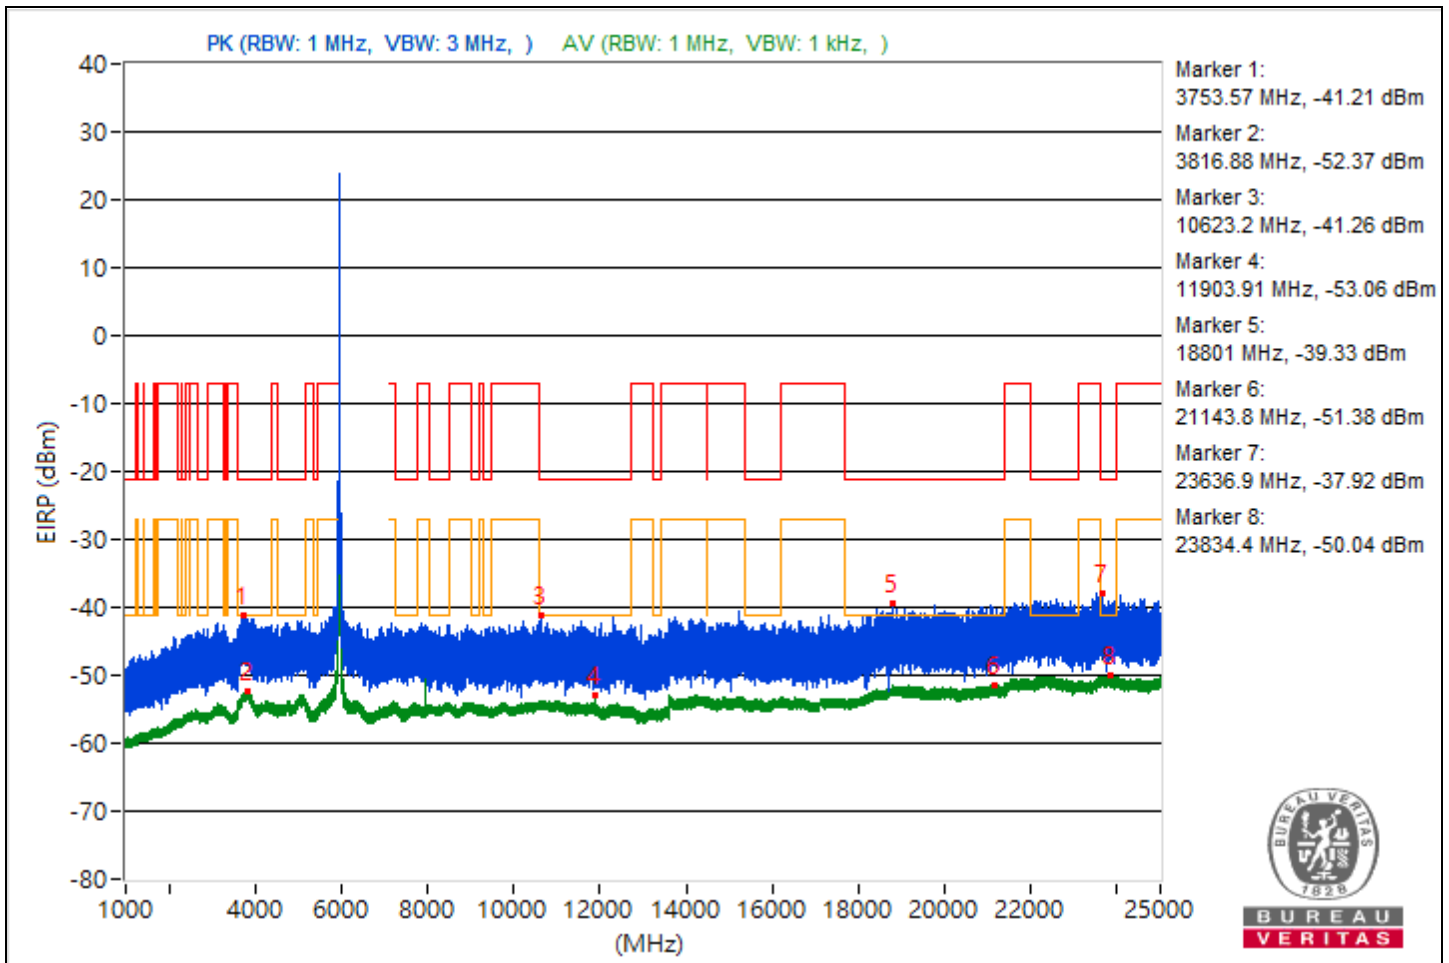


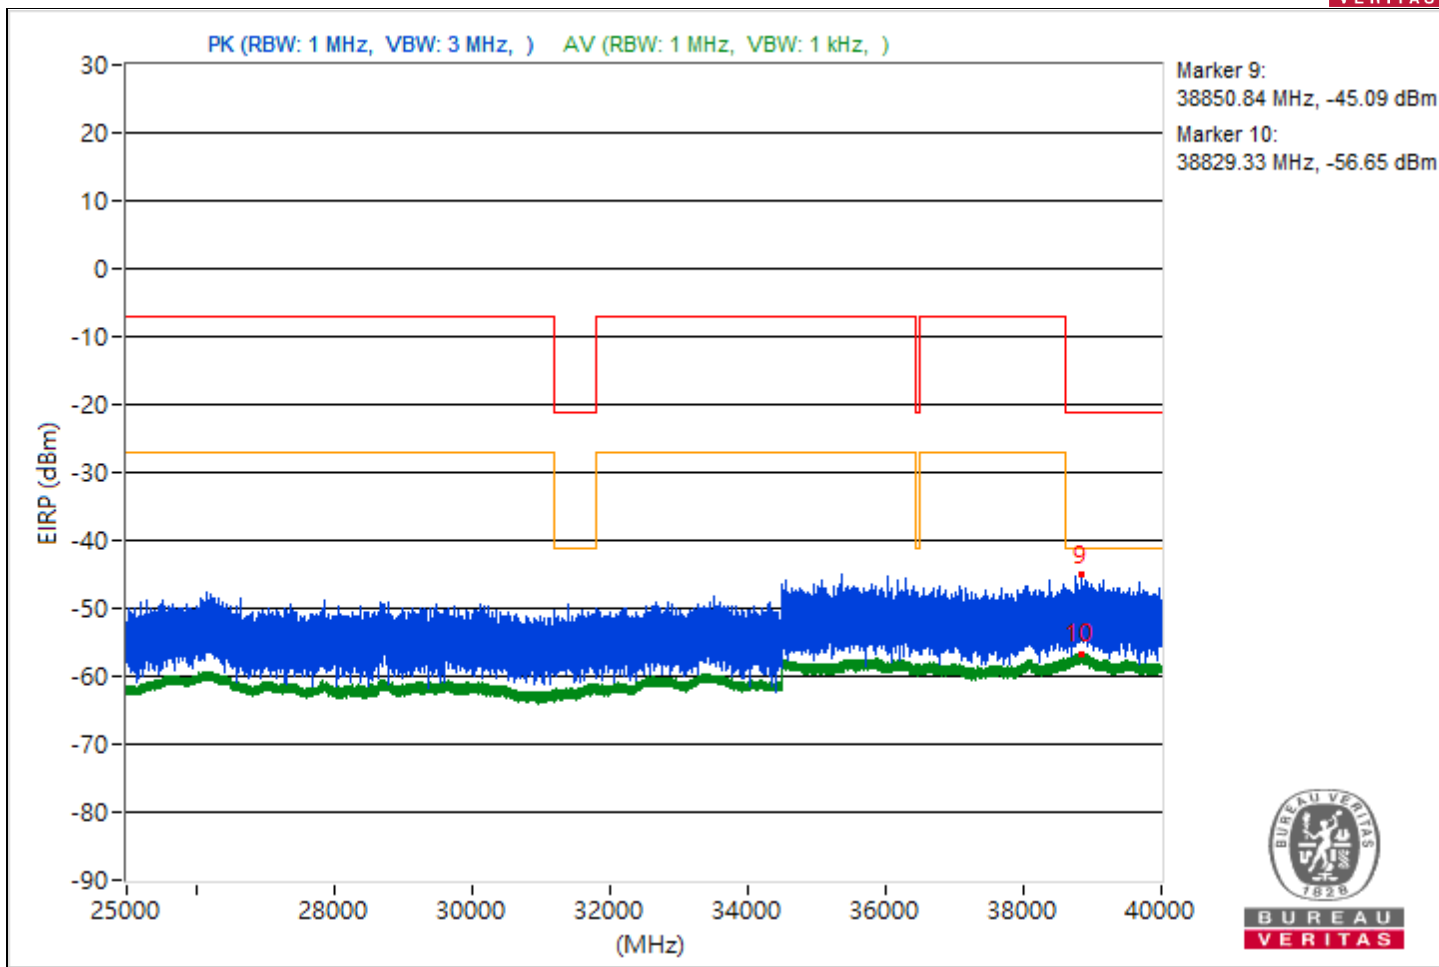


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5092.74	55.21 PK	74	-18.79	-44.97	4.92	-40.05
2	3811.59	42.99 AV	54	-11.01	-57.19	4.92	-52.27
3	11393.33	55.05 PK	74	-18.95	-45.13	4.92	-40.21
4	15356	41.95 AV	54	-12.05	-58.23	4.92	-53.31
5	20593	55.65 PK	74	-18.35	-44.53	4.92	-39.61
6	21344.2	43.77 AV	54	-10.23	-56.41	4.92	-51.49
7	22227.9	56.5 PK	74	-17.5	-43.68	4.92	-38.76
8	22252	45.18 AV	54	-8.82	-55	4.92	-50.08
9	38712.53	50.38 PK	74	-23.62	-49.8	4.92	-44.88
10	38808.89	38.64 AV	54	-15.36	-61.54	4.92	-56.62

Note: Margin value = Emission Level - Limit value

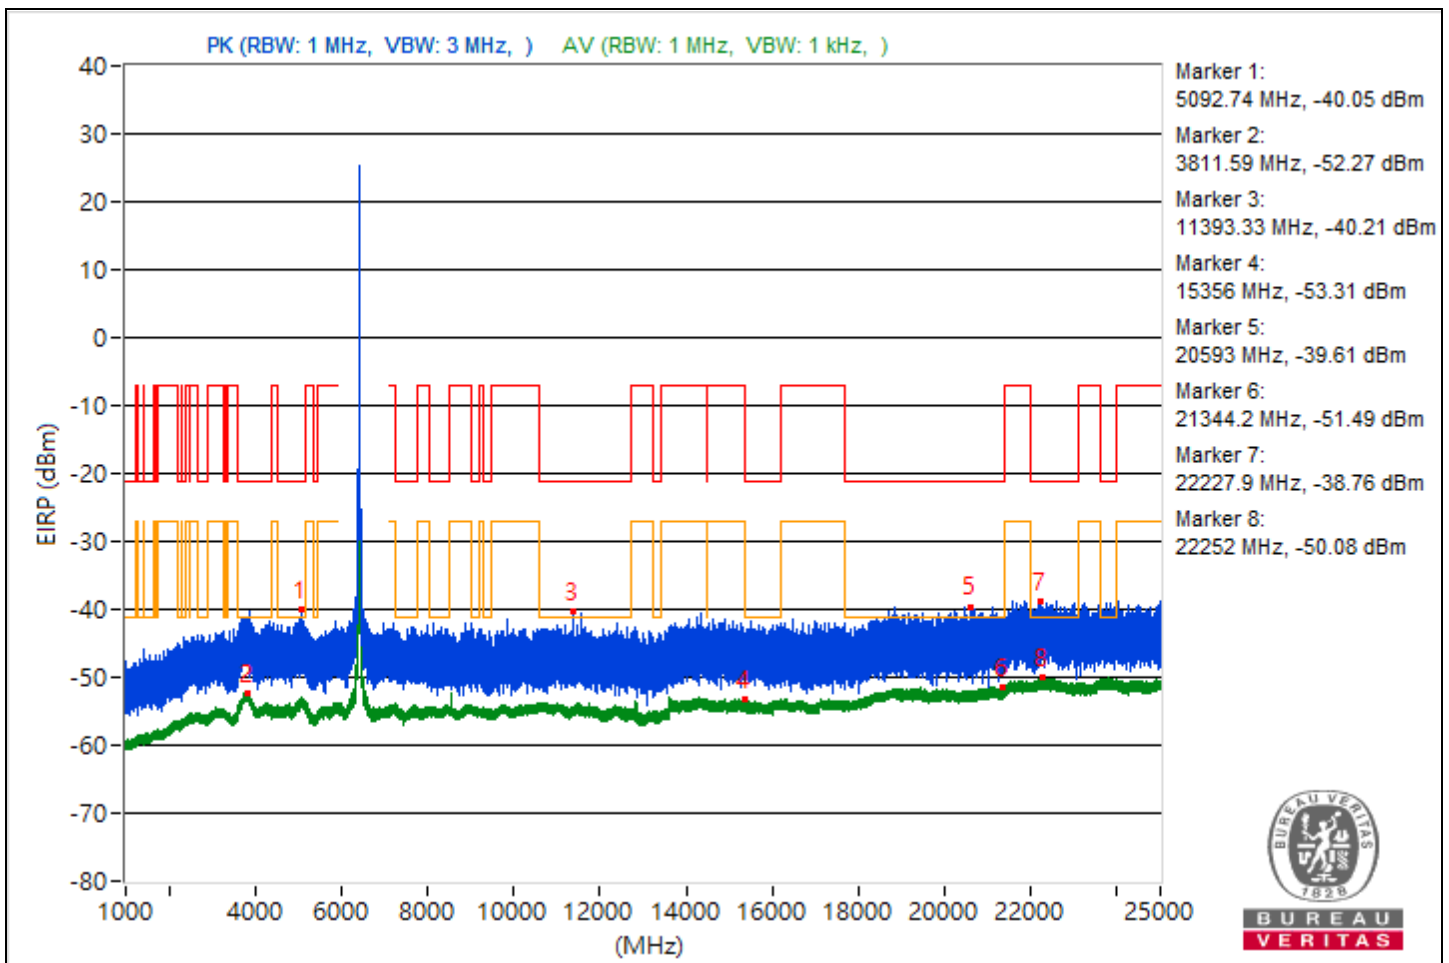


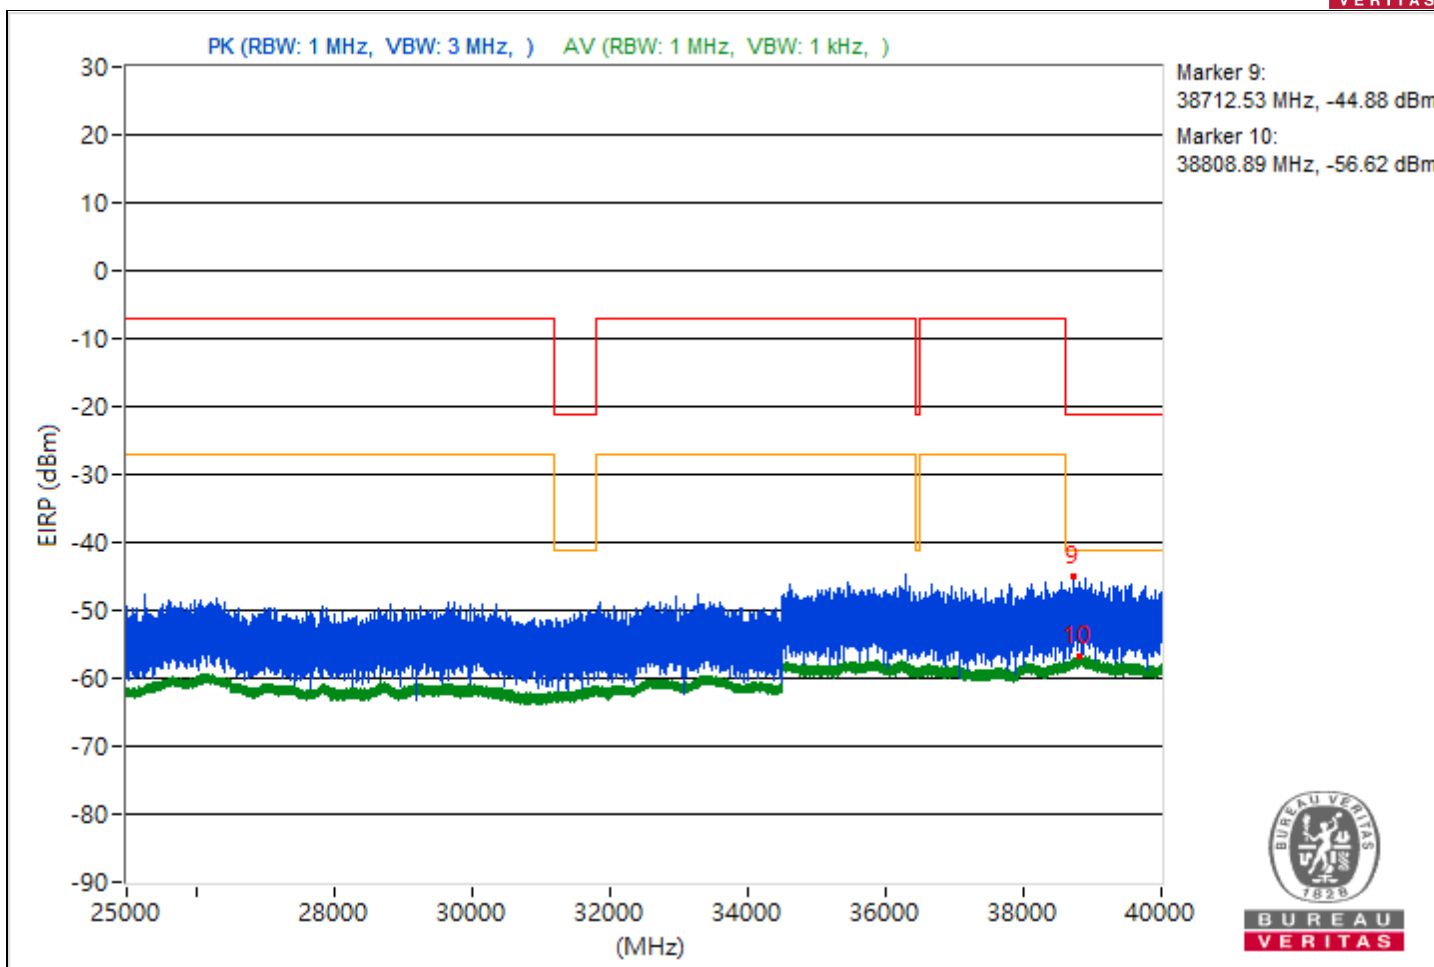


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3868.21	54.42 PK	74	-19.58	-45.76	4.92	-40.84
2	3797.67	42.92 AV	54	-11.08	-57.26	4.92	-52.34
3	11507.2	53.45 PK	74	-20.55	-46.73	4.92	-41.81
4	14488.71	41.78 AV	54	-12.22	-58.4	4.92	-53.48
5	21240	56.57 PK	74	-17.43	-43.61	4.92	-38.69
6	21380.1	43.84 AV	54	-10.16	-56.34	4.92	-51.42
7	22291.6	57.1 PK	74	-16.9	-43.08	4.92	-38.16
8	23996.8	45.17 AV	54	-8.83	-55.01	4.92	-50.09
9	39116.62	49.83 PK	74	-24.17	-50.35	4.92	-45.43
10	38828.71	38.7 AV	54	-15.3	-61.48	4.92	-56.56

Note: Margin value = Emission Level - Limit value

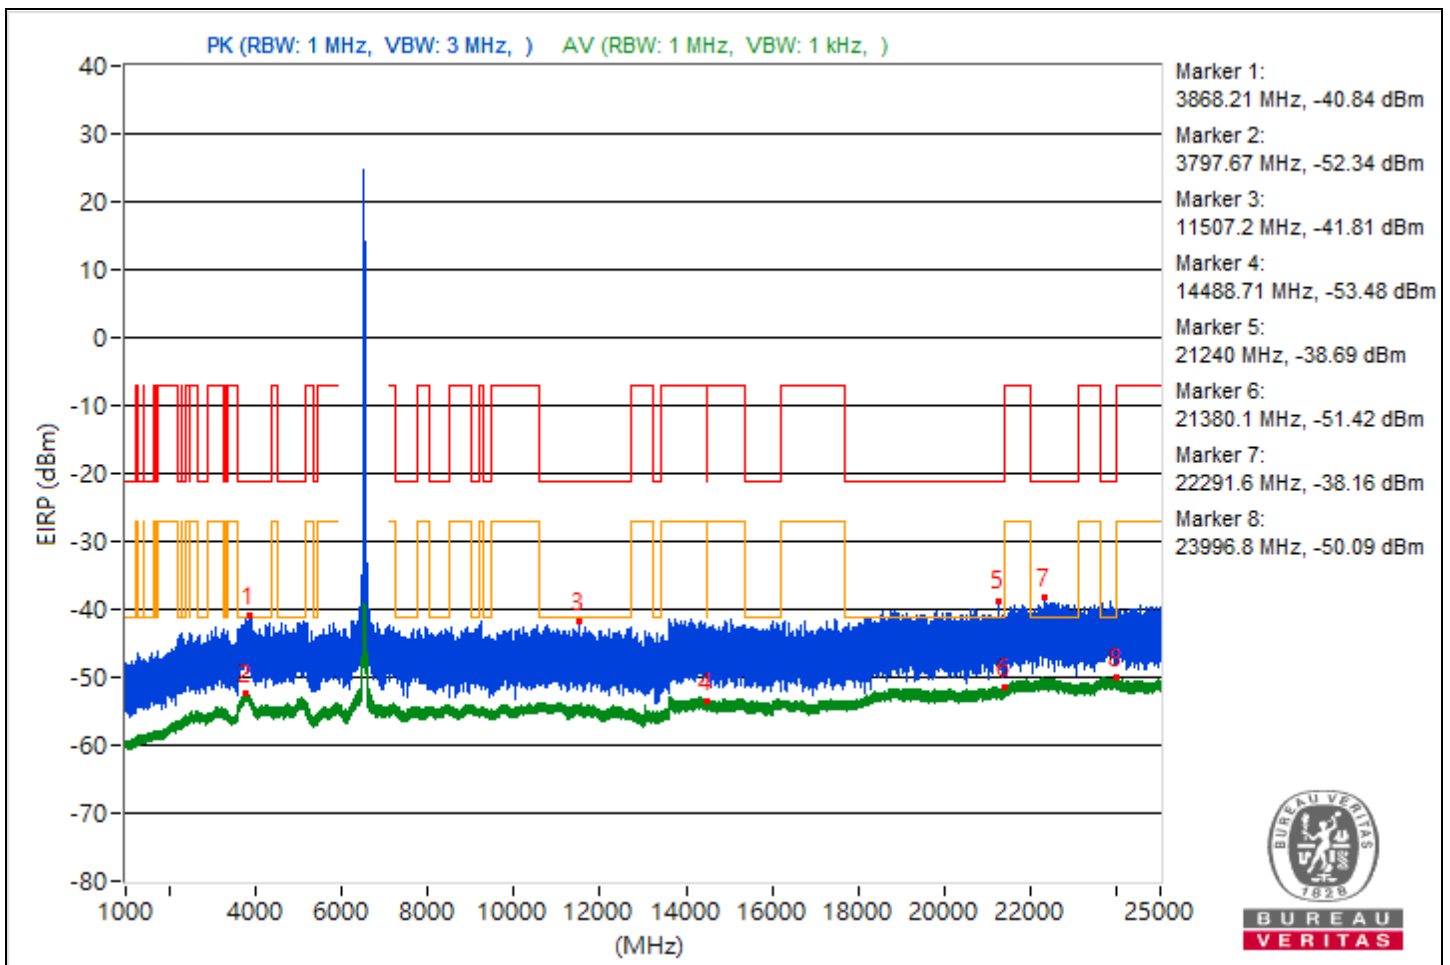

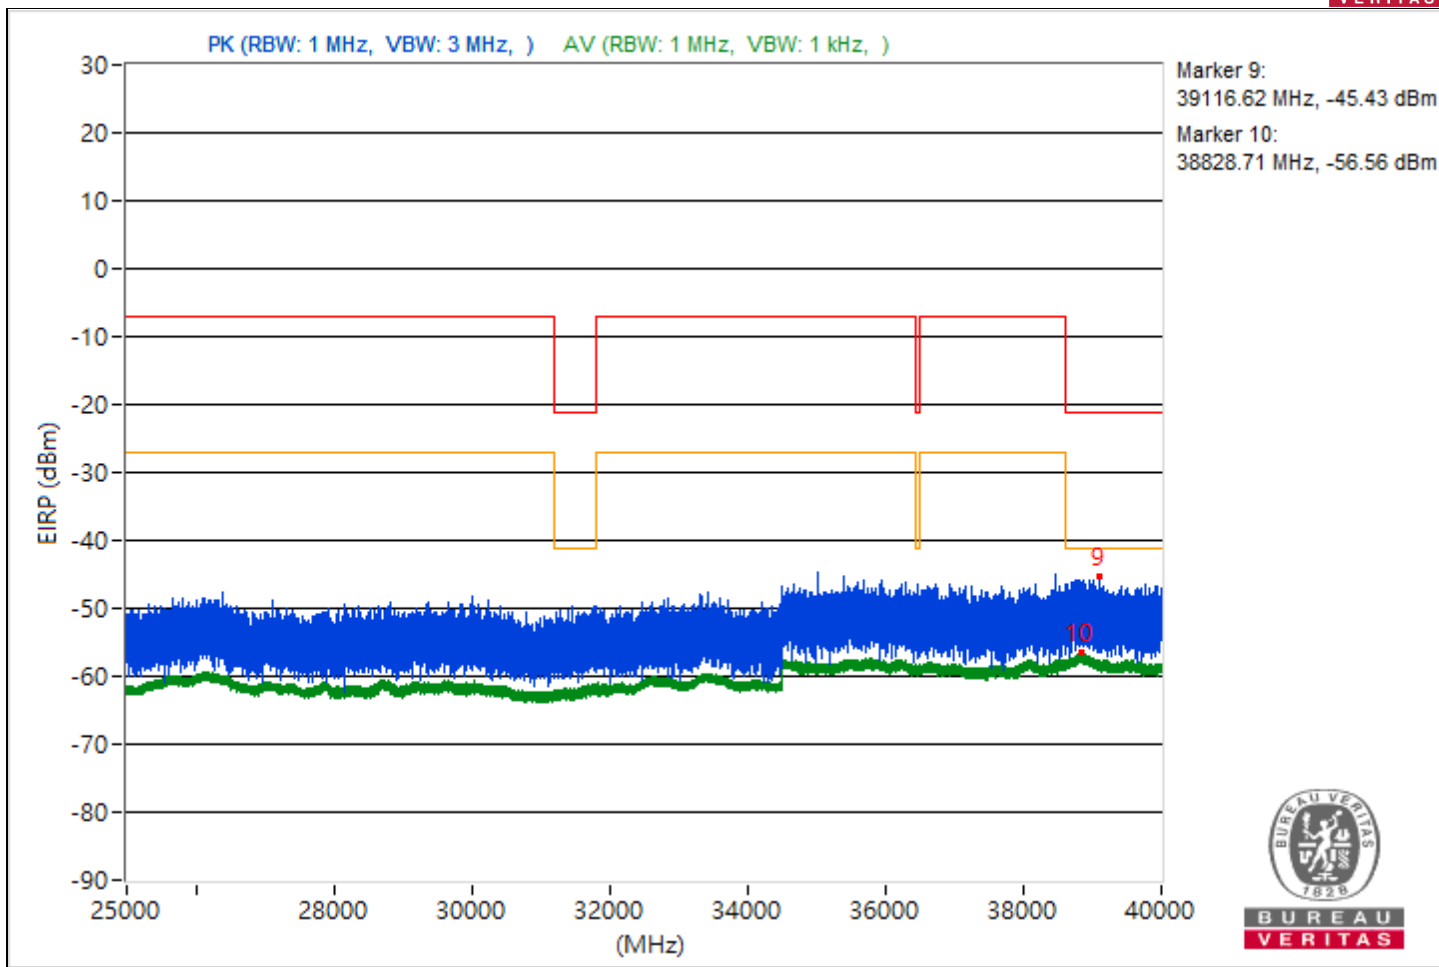





RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.97	54.49 PK	74	-19.51	-45.69	4.92	-40.77
2	3850.87	42.93 AV	54	-11.07	-57.25	4.92	-52.33
3	15626.58	53.83 PK	74	-20.17	-46.35	4.92	-41.43
4	14499.02	41.8 AV	54	-12.2	-58.38	4.92	-53.46
5	20025	55.84 PK	74	-18.16	-44.34	4.92	-39.42
6	21021.7	43.79 AV	54	-10.21	-56.39	4.92	-51.47
7	23733.6	57.69 PK	74	-16.31	-42.49	4.92	-37.57
8	22482.7	45.18 AV	54	-8.82	-55	4.92	-50.08
9	39214.93	50.12 PK	74	-23.88	-50.06	4.92	-45.14
10	38844.89	38.73 AV	54	-15.27	-61.45	4.92	-56.53

Note: Margin value = Emission Level - Limit value

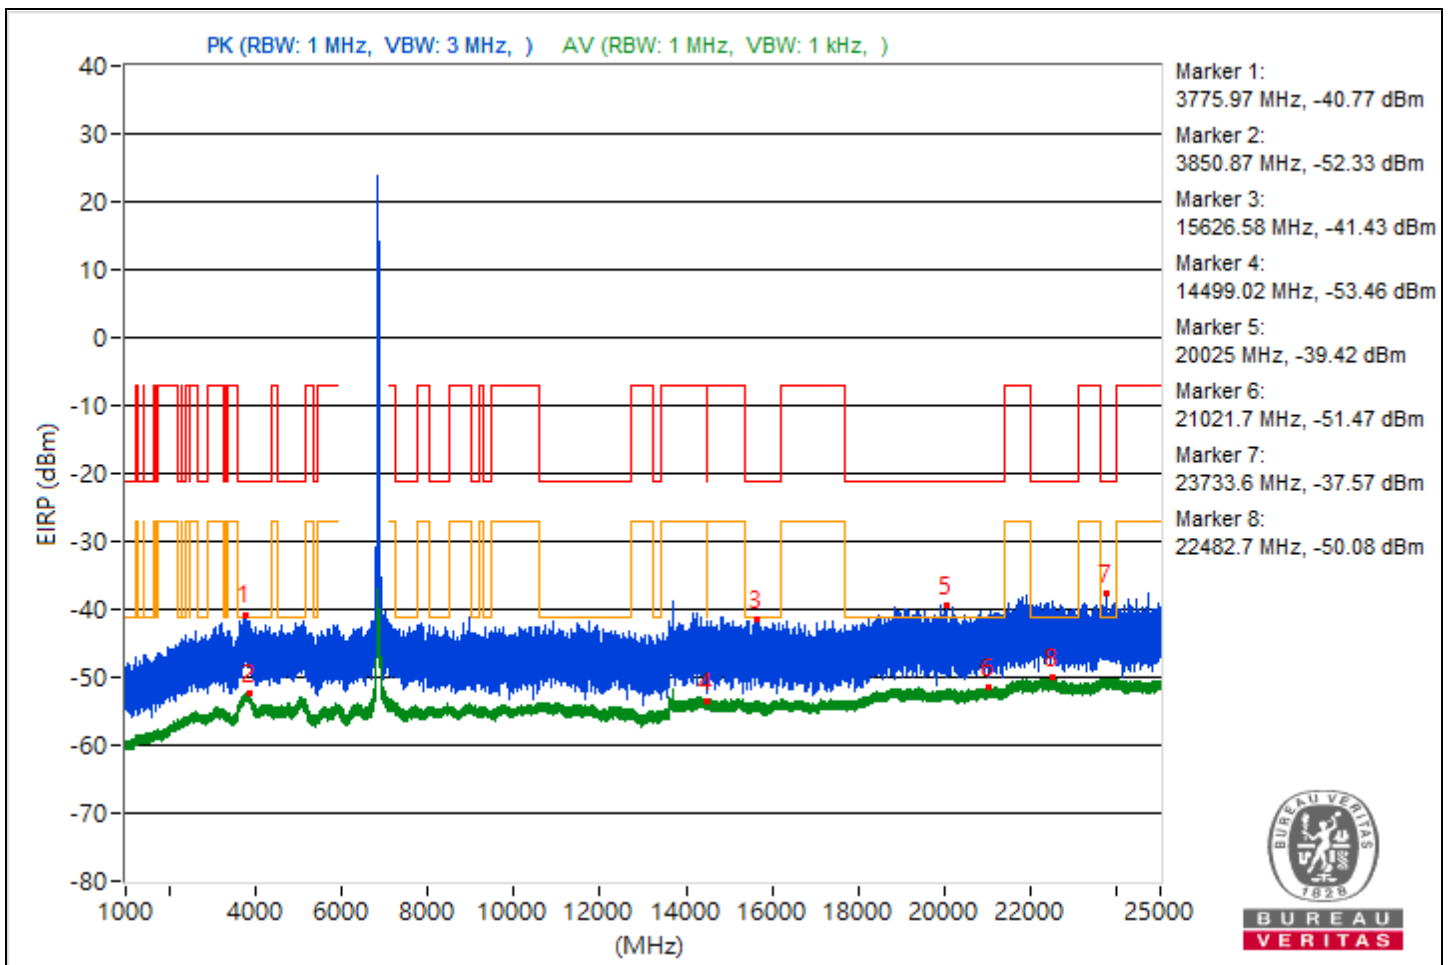


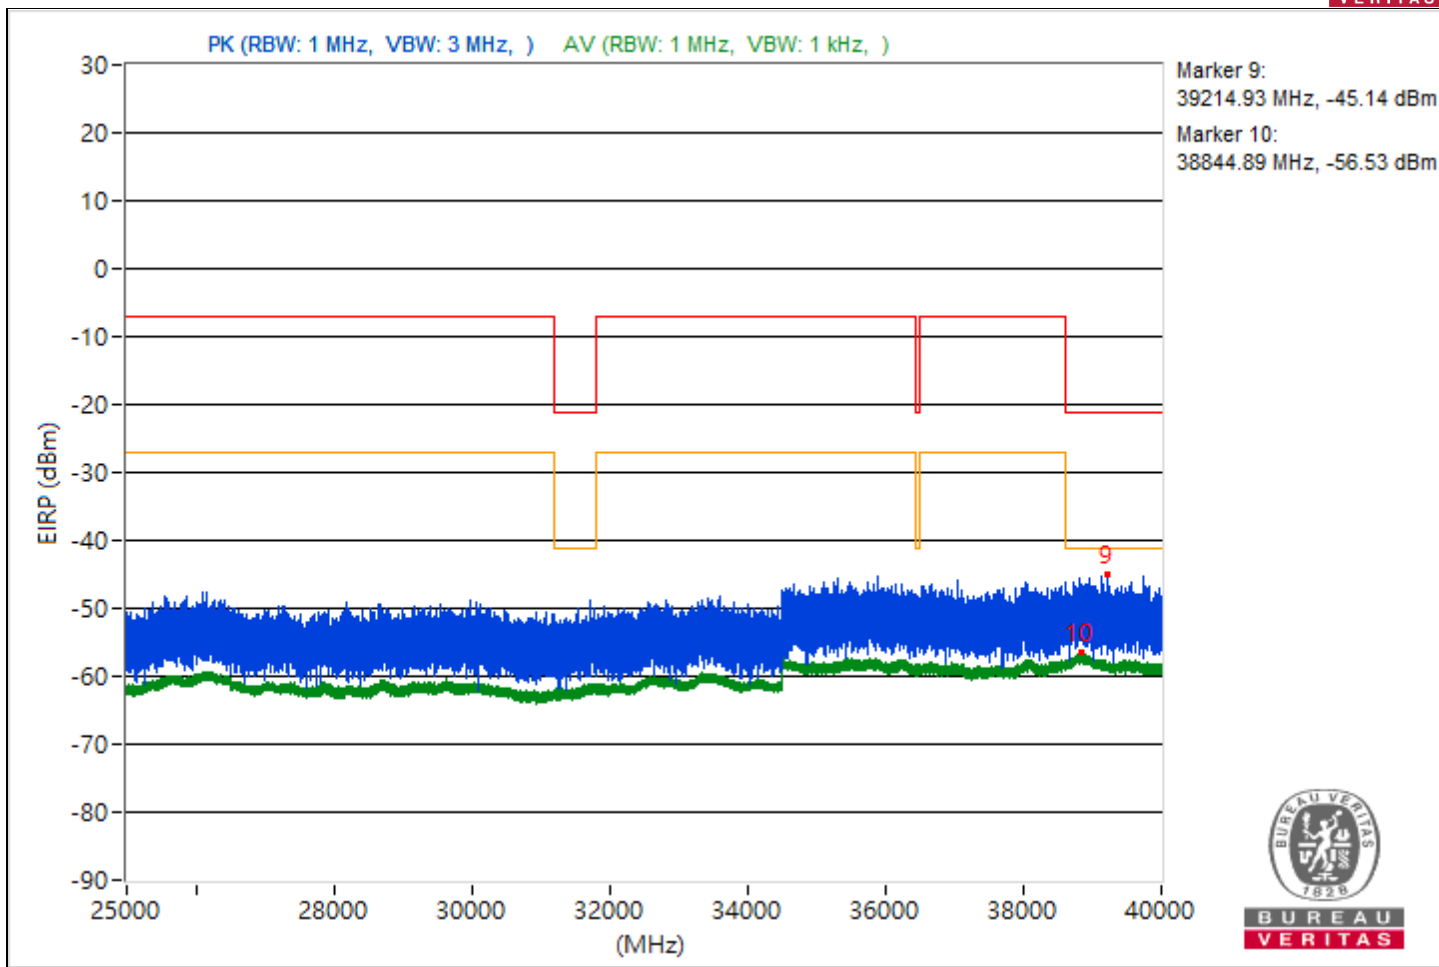


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5082.94	53.68 PK	74	-20.32	-46.5	4.92	-41.58
2	3829.87	43.14 AV	54	-10.86	-57.04	4.92	-52.12
3	14476	53.92 PK	74	-20.08	-46.26	4.92	-41.34
4	14476.27	41.95 AV	54	-12.05	-58.23	4.92	-53.31
5	19420.8	56.38 PK	74	-17.62	-43.8	4.92	-38.88
6	21255.8	43.98 AV	54	-10.02	-56.2	4.92	-51.28
7	22998.9	56.79 PK	74	-17.21	-43.39	4.92	-38.47
8	23894.1	45.19 AV	54	-8.81	-54.99	4.92	-50.07
9	38988.53	49.87 PK	74	-24.13	-50.31	4.92	-45.39
10	38787.64	38.61 AV	54	-15.39	-61.57	4.92	-56.65

Note: Margin value = Emission Level - Limit value

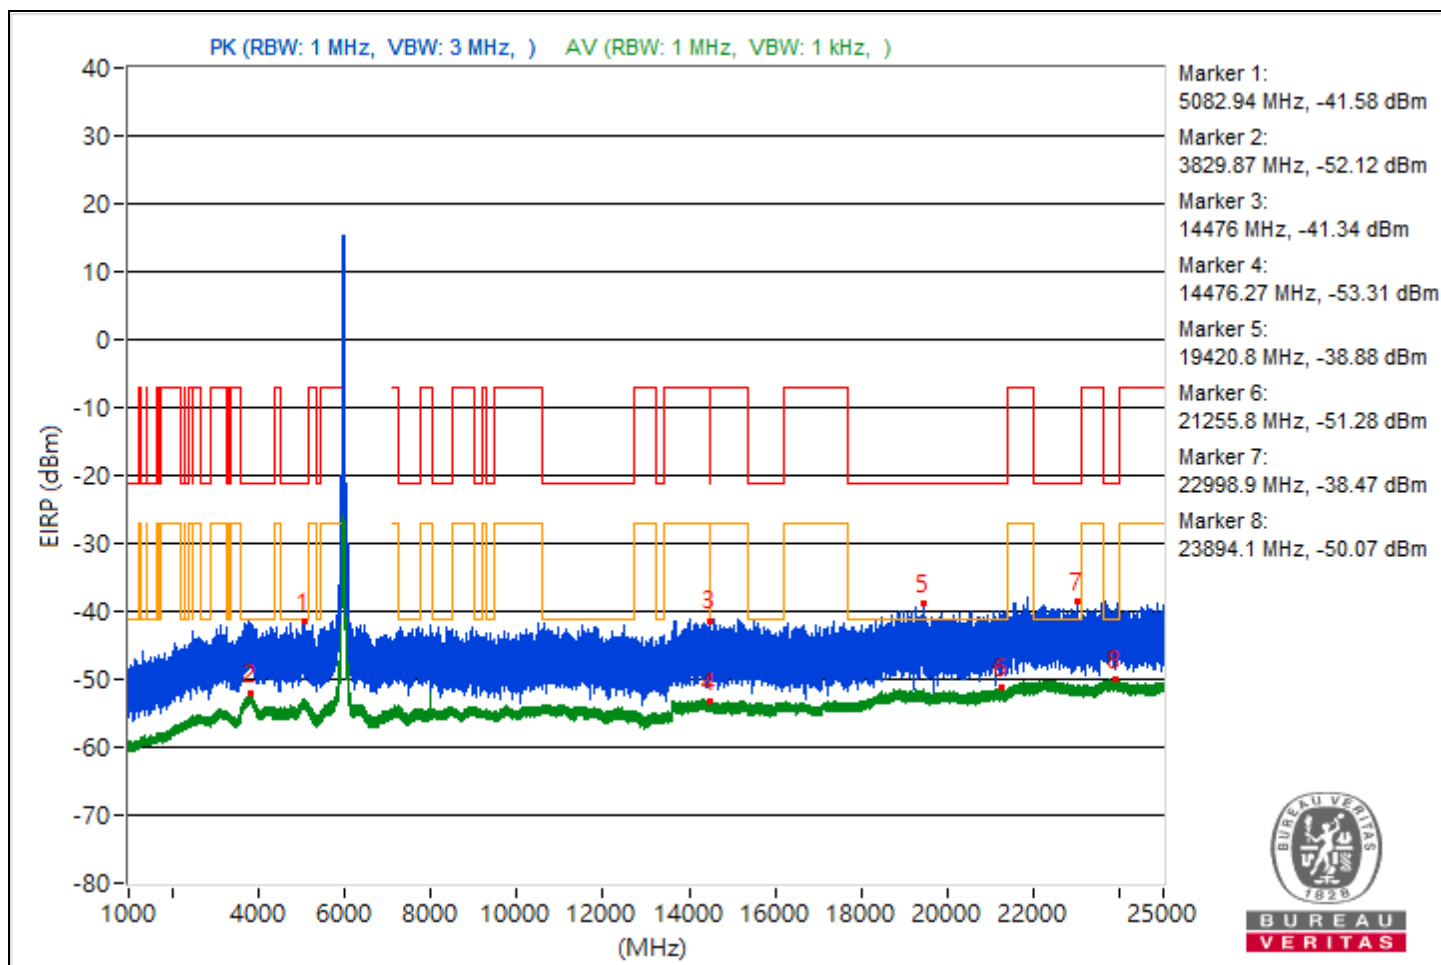

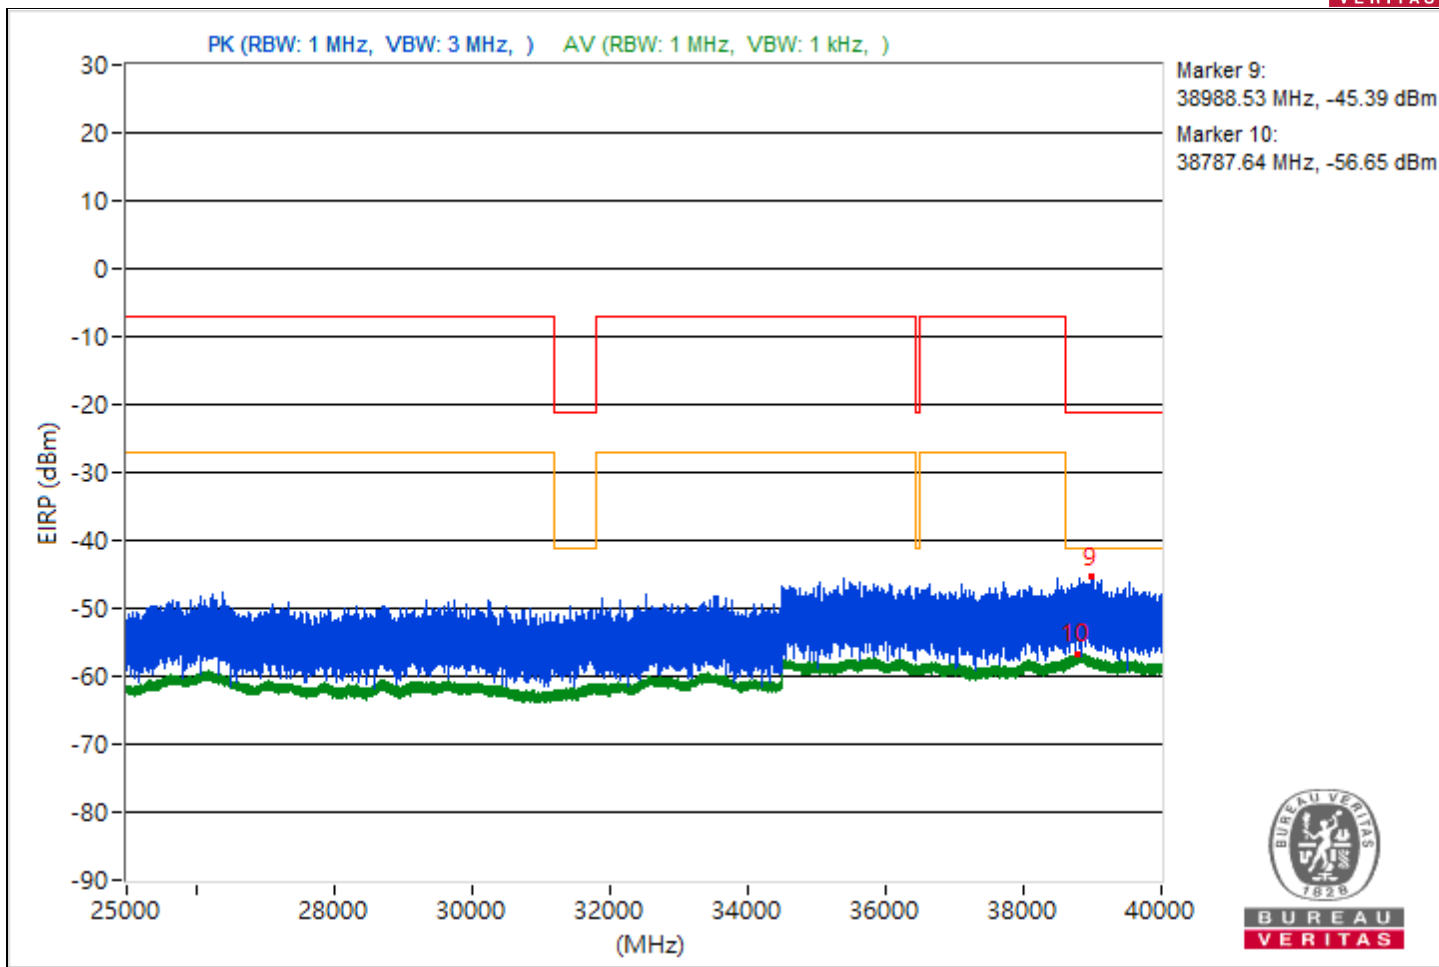





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.57	54.24 PK	74	-19.76	-45.94	4.92	-41.02
2	3804.12	42.98 AV	54	-11.02	-57.2	4.92	-52.28
3	7295.88	54.07 PK	74	-19.93	-46.11	4.92	-41.19
4	14495.02	41.94 AV	54	-12.06	-58.24	4.92	-53.32
5	18366.9	55.96 PK	74	-18.04	-44.22	4.92	-39.3
6	20863.7	43.79 AV	54	-10.21	-56.39	4.92	-51.47
7	22322.2	56.82 PK	74	-17.18	-43.36	4.92	-38.44
8	23669.9	45.13 AV	54	-8.87	-55.05	4.92	-50.13
9	38799.2	49.89 PK	74	-24.11	-50.29	4.92	-45.37
10	38801.96	38.58 AV	54	-15.42	-61.6	4.92	-56.68

Note: Margin value = Emission Level - Limit value

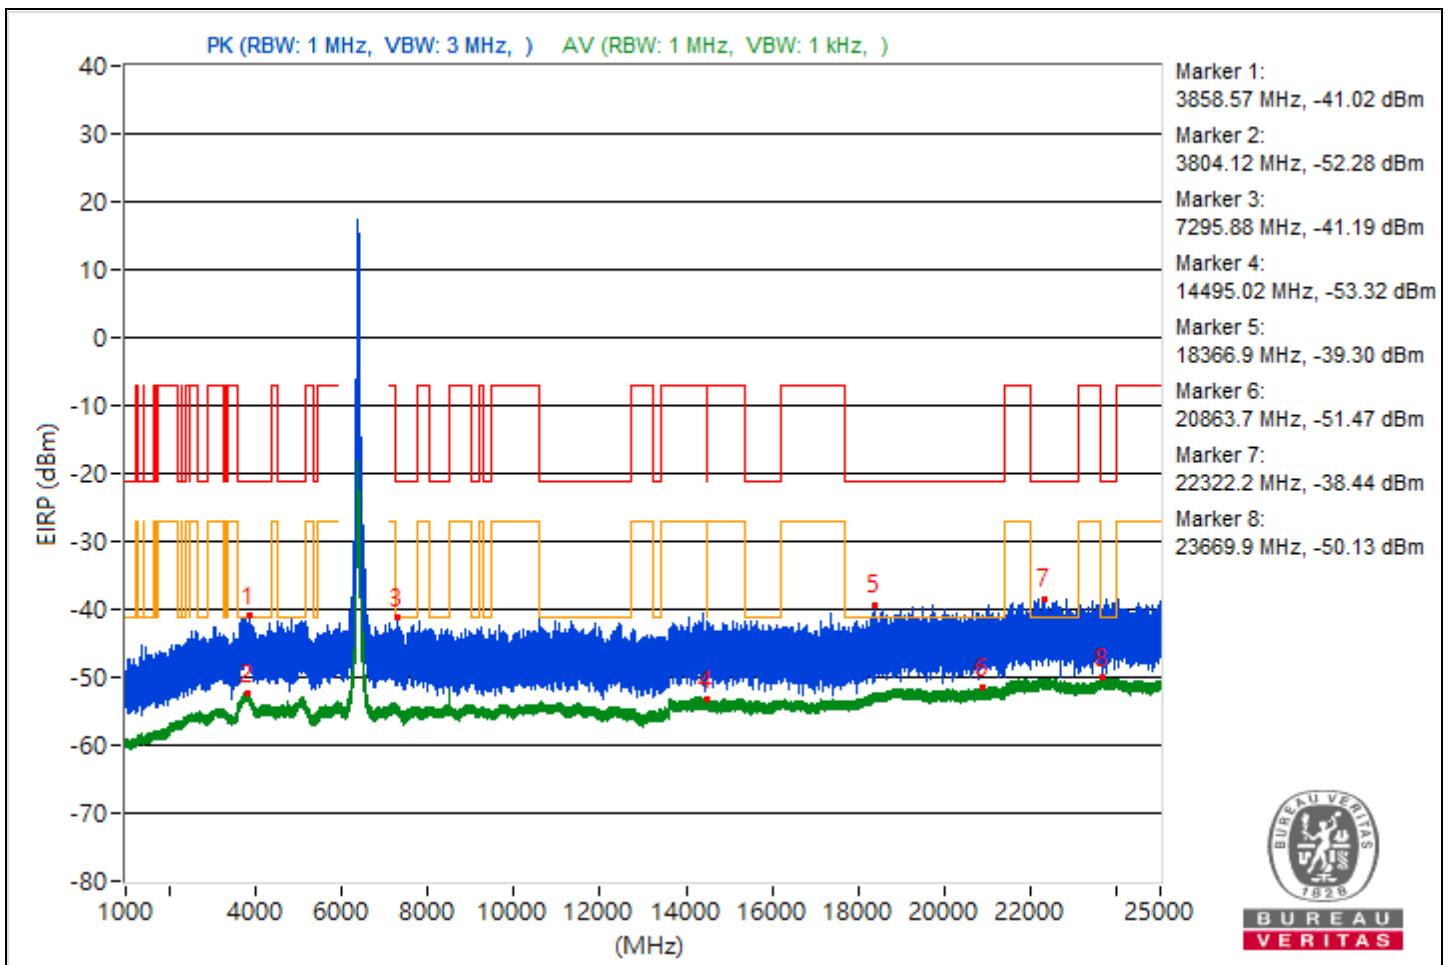


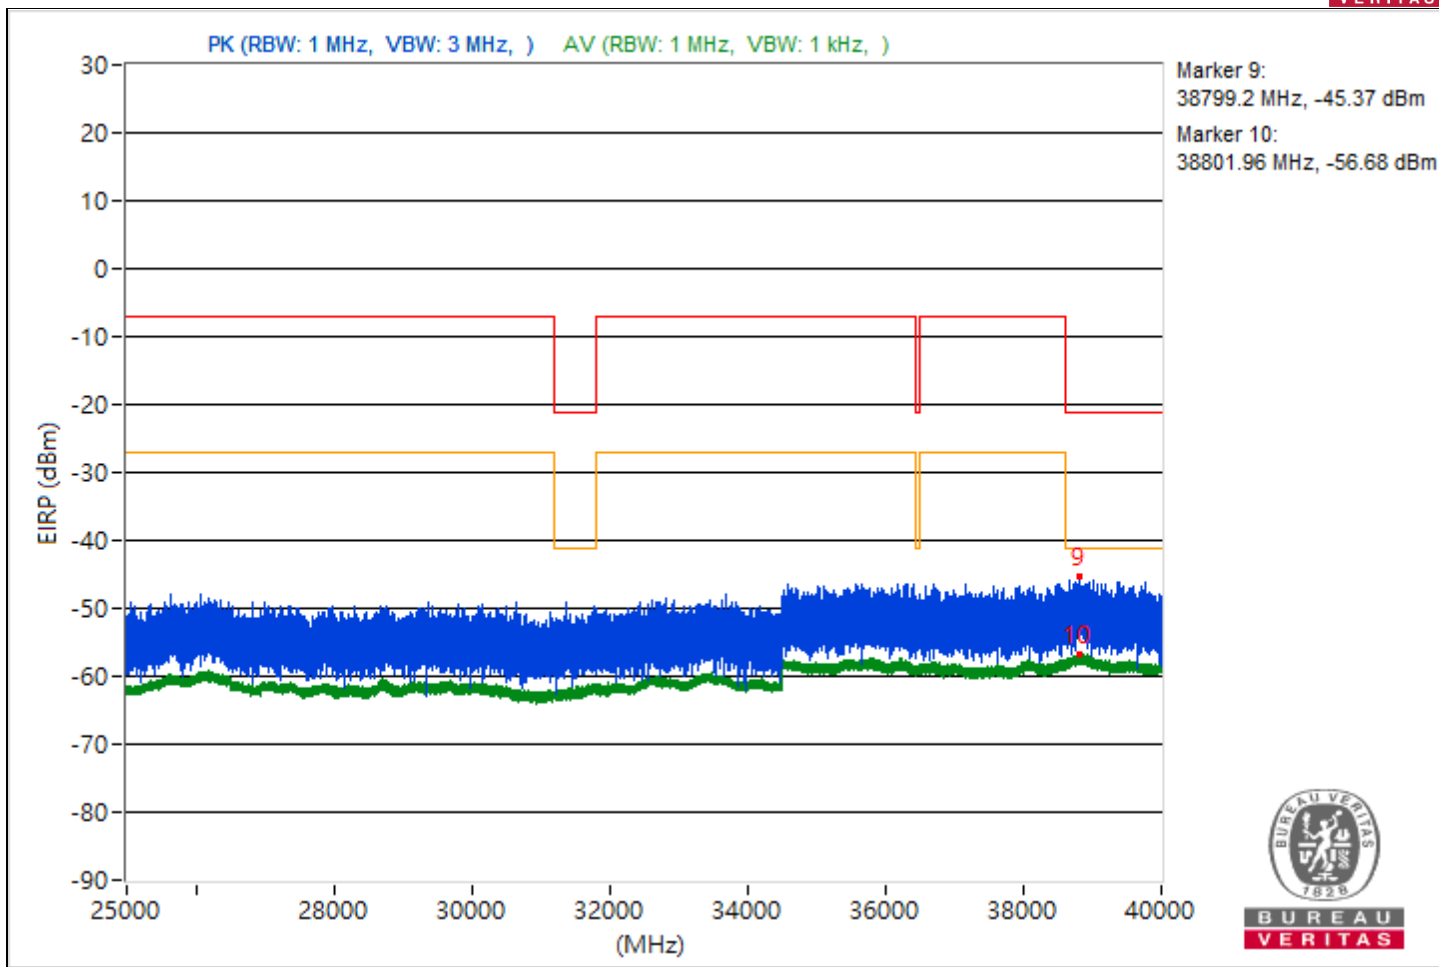


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3849.16	56.3 PK	74	-17.7	-43.88	4.92	-38.96
2	3808.56	43.05 AV	54	-10.95	-57.13	4.92	-52.21
3	8349.51	54.12 PK	74	-19.88	-46.06	4.92	-41.14
4	14497.96	42.04 AV	54	-11.96	-58.14	4.92	-53.22
5	19870.8	55.91 PK	74	-18.09	-44.27	4.92	-39.35
6	21165.2	44.13 AV	54	-9.87	-56.05	4.92	-51.13
7	22525.6	57.71 PK	74	-16.29	-42.47	4.92	-37.55
8	23699.2	45.17 AV	54	-8.83	-55.01	4.92	-50.09
9	39014.58	50.05 PK	74	-23.95	-50.13	4.92	-45.21
10	38809.51	38.52 AV	54	-15.48	-61.66	4.92	-56.74

Note: Margin value = Emission Level - Limit value

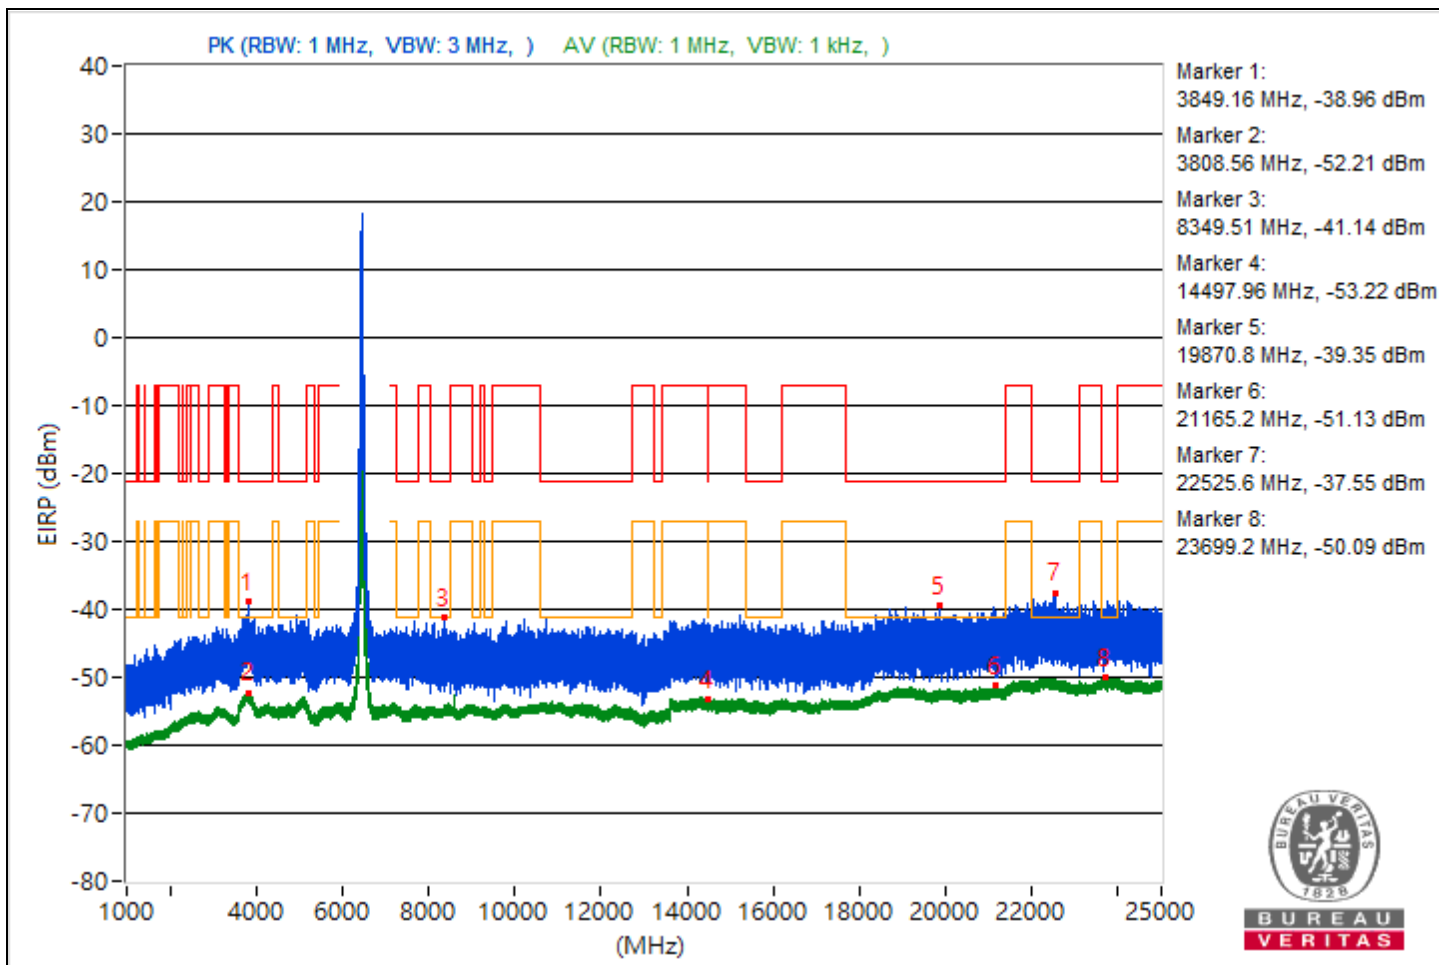


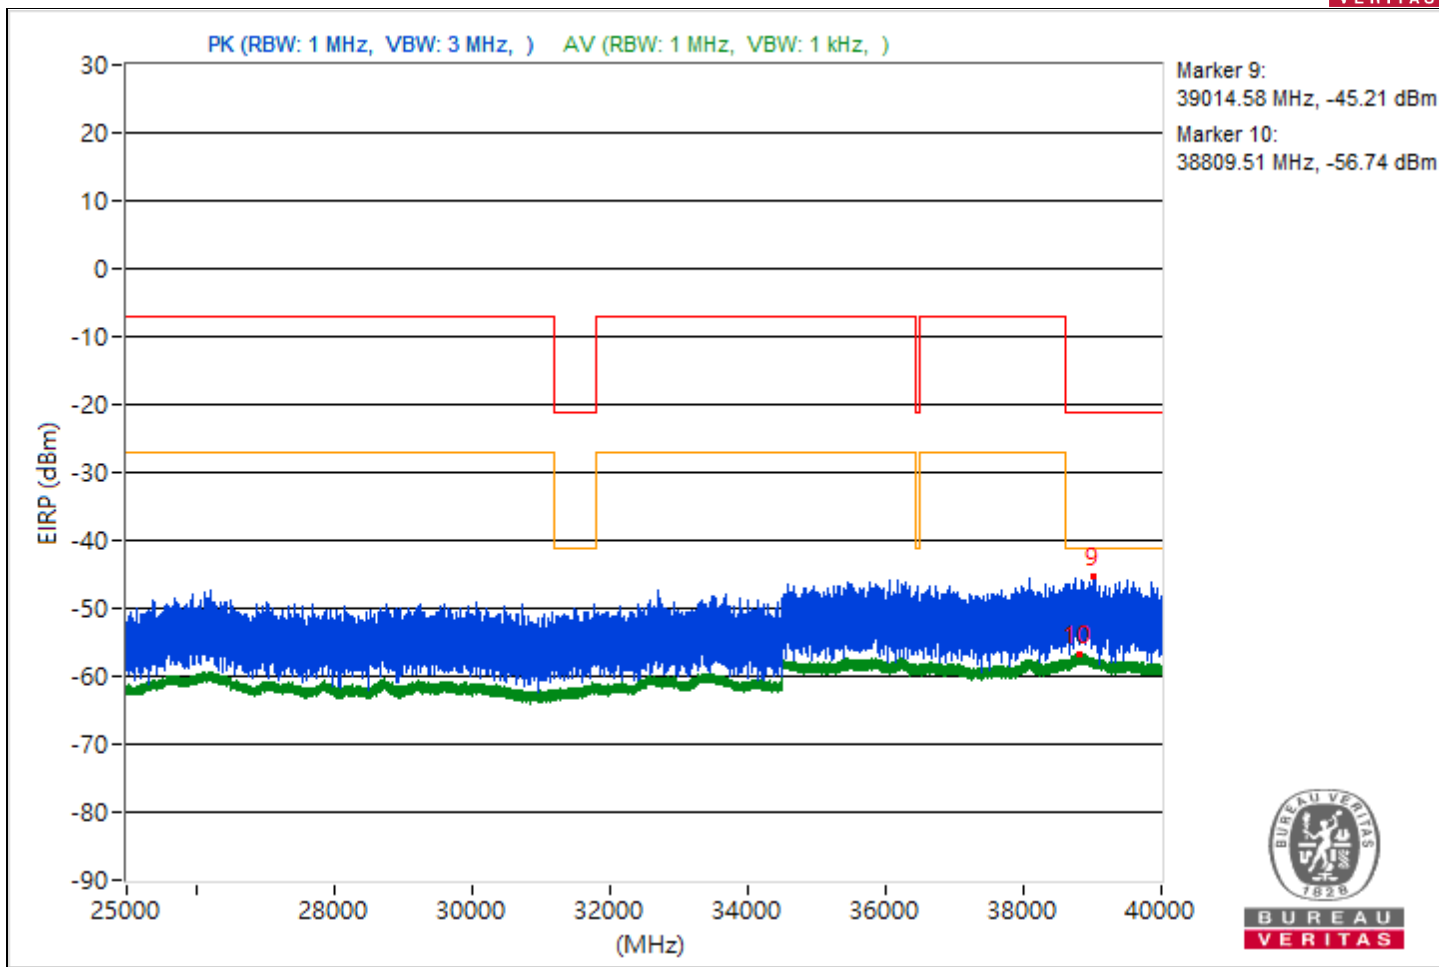


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.7	55.11 PK	74	-18.89	-45.07	4.92	-40.15
2	3777.52	42.85 AV	54	-11.15	-57.33	4.92	-52.41
3	7677.77	54.01 PK	74	-19.99	-46.17	4.92	-41.25
4	14482.49	41.93 AV	54	-12.07	-58.25	4.92	-53.33
5	18926.9	55.69 PK	74	-18.31	-44.49	4.92	-39.57
6	21125.8	43.77 AV	54	-10.23	-56.41	4.92	-51.49
7	23858.9	56.33 PK	74	-17.67	-43.85	4.92	-38.93
8	22480.3	45.15 AV	54	-8.85	-55.03	4.92	-50.11
9	38666.22	50.28 PK	74	-23.72	-49.9	4.92	-44.98
10	38881.96	38.6 AV	54	-15.4	-61.58	4.92	-56.66

Note: Margin value = Emission Level - Limit value

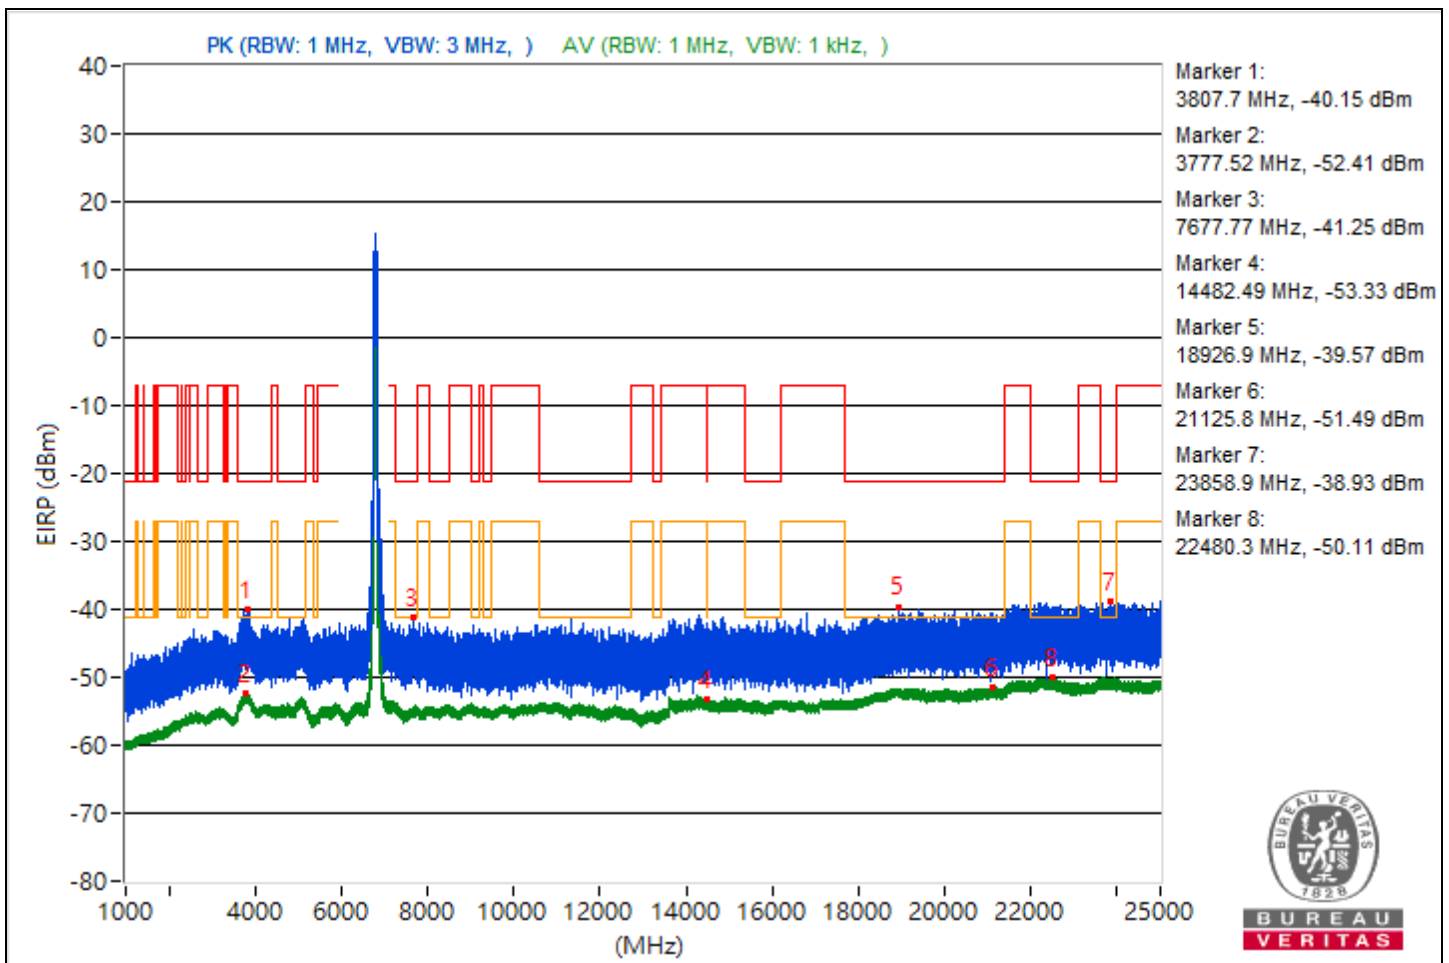


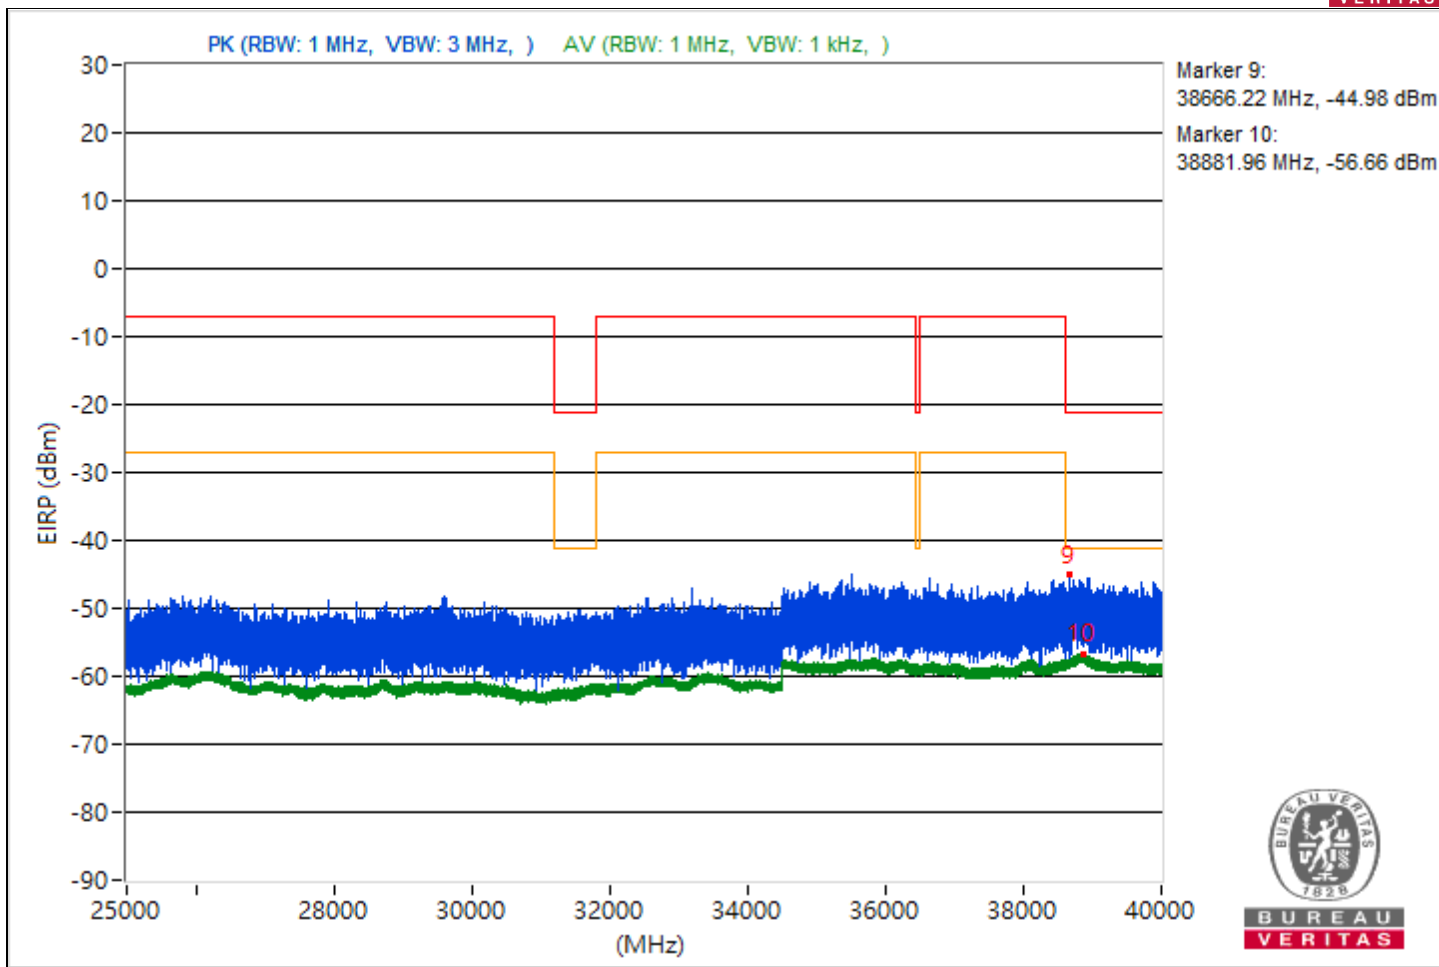


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.23	53.89 PK	74	-20.11	-46.29	4.92	-41.37
2	3803.11	43.04 AV	54	-10.96	-57.14	4.92	-52.22
3	12264.62	53.85 PK	74	-20.15	-46.33	4.92	-41.41
4	14487.02	42 AV	54	-12	-58.18	4.92	-53.26
5	21175.3	55.92 PK	74	-18.08	-44.26	4.92	-39.34
6	21160.3	43.83 AV	54	-10.17	-56.35	4.92	-51.43
7	23601.3	56.63 PK	74	-17.37	-43.55	4.92	-38.63
8	23824.8	45.24 AV	54	-8.76	-54.94	4.92	-50.02
9	38787.02	49.52 PK	74	-24.48	-50.66	4.92	-45.74
10	38825.33	38.74 AV	54	-15.26	-61.44	4.92	-56.52

Note: Margin value = Emission Level - Limit value

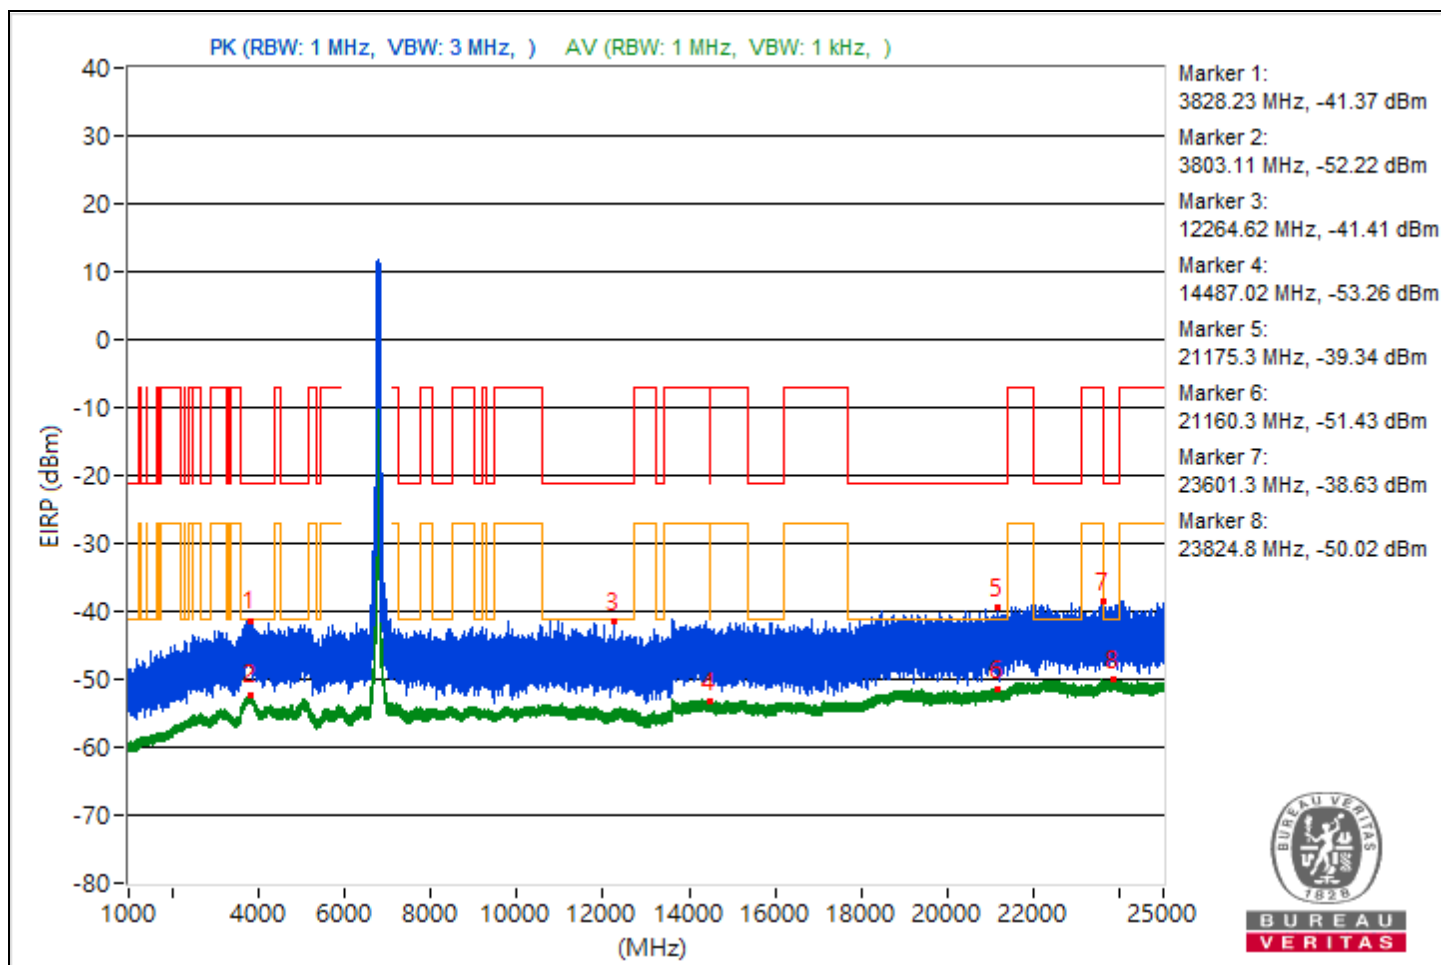


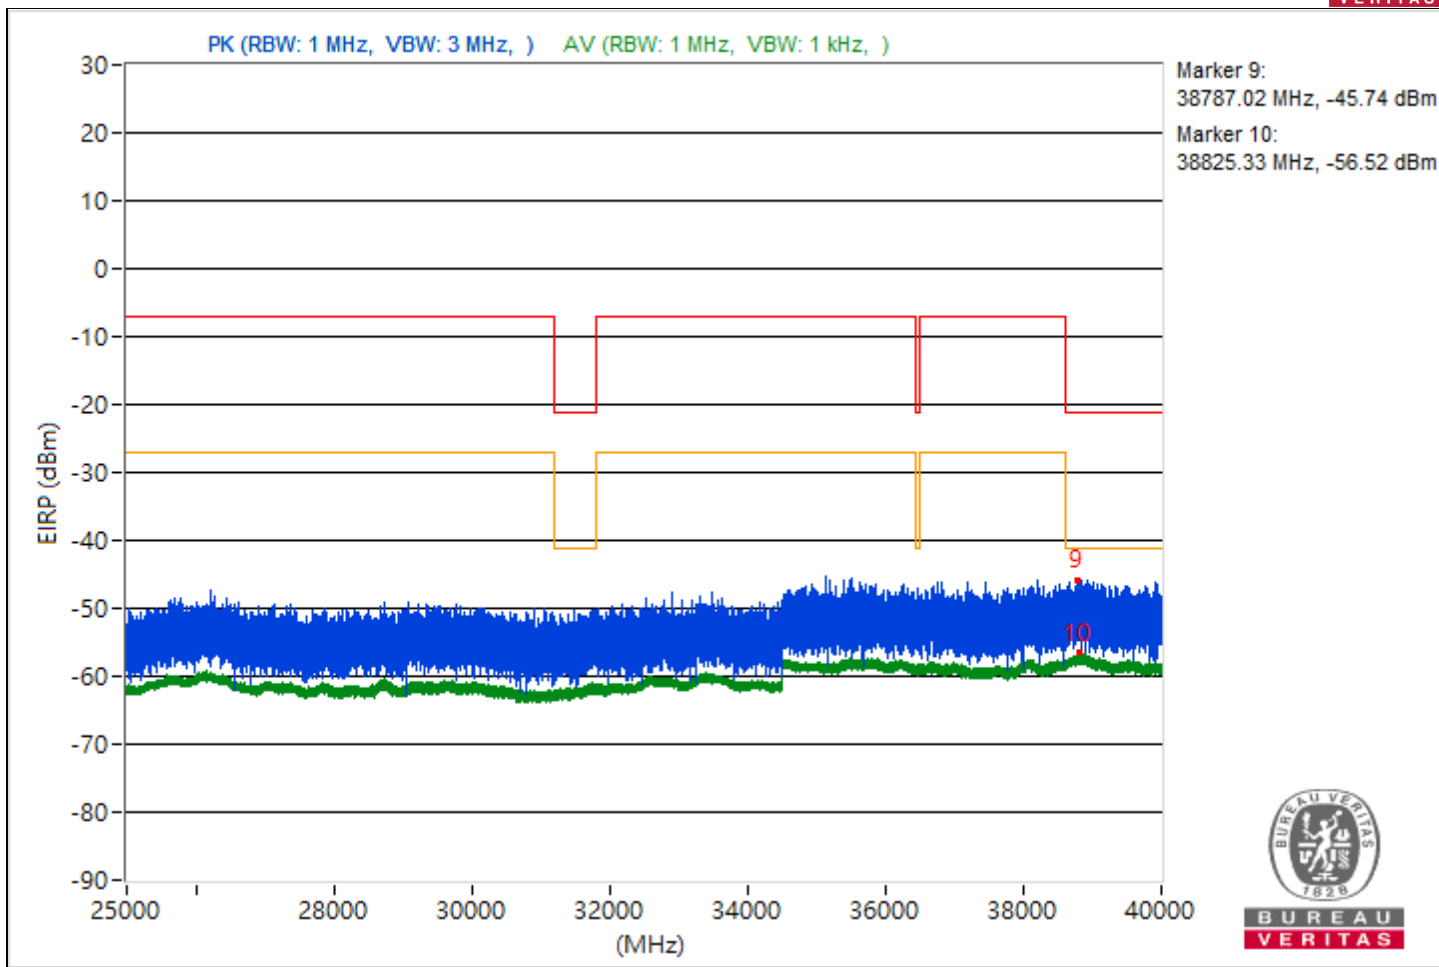


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.19	54.8 PK	74	-19.2	-45.38	4.92	-40.46
2	3800.16	43.03 AV	54	-10.97	-57.15	4.92	-52.23
3	15534.49	54.21 PK	74	-19.79	-45.97	4.92	-41.05
4	8460	44.42 AV	54	-9.58	-55.76	4.92	-50.84
5	19472.9	56.77 PK	74	-17.23	-43.41	4.92	-38.49
6	21167.1	43.9 AV	54	-10.1	-56.28	4.92	-51.36
7	23852	57.03 PK	74	-16.97	-43.15	4.92	-38.23
8	22255.2	45.17 AV	54	-8.83	-55.01	4.92	-50.09
9	38943.64	50.24 PK	74	-23.76	-49.94	4.92	-45.02
10	38823.2	38.74 AV	54	-15.26	-61.44	4.92	-56.52

Note: Margin value = Emission Level - Limit value

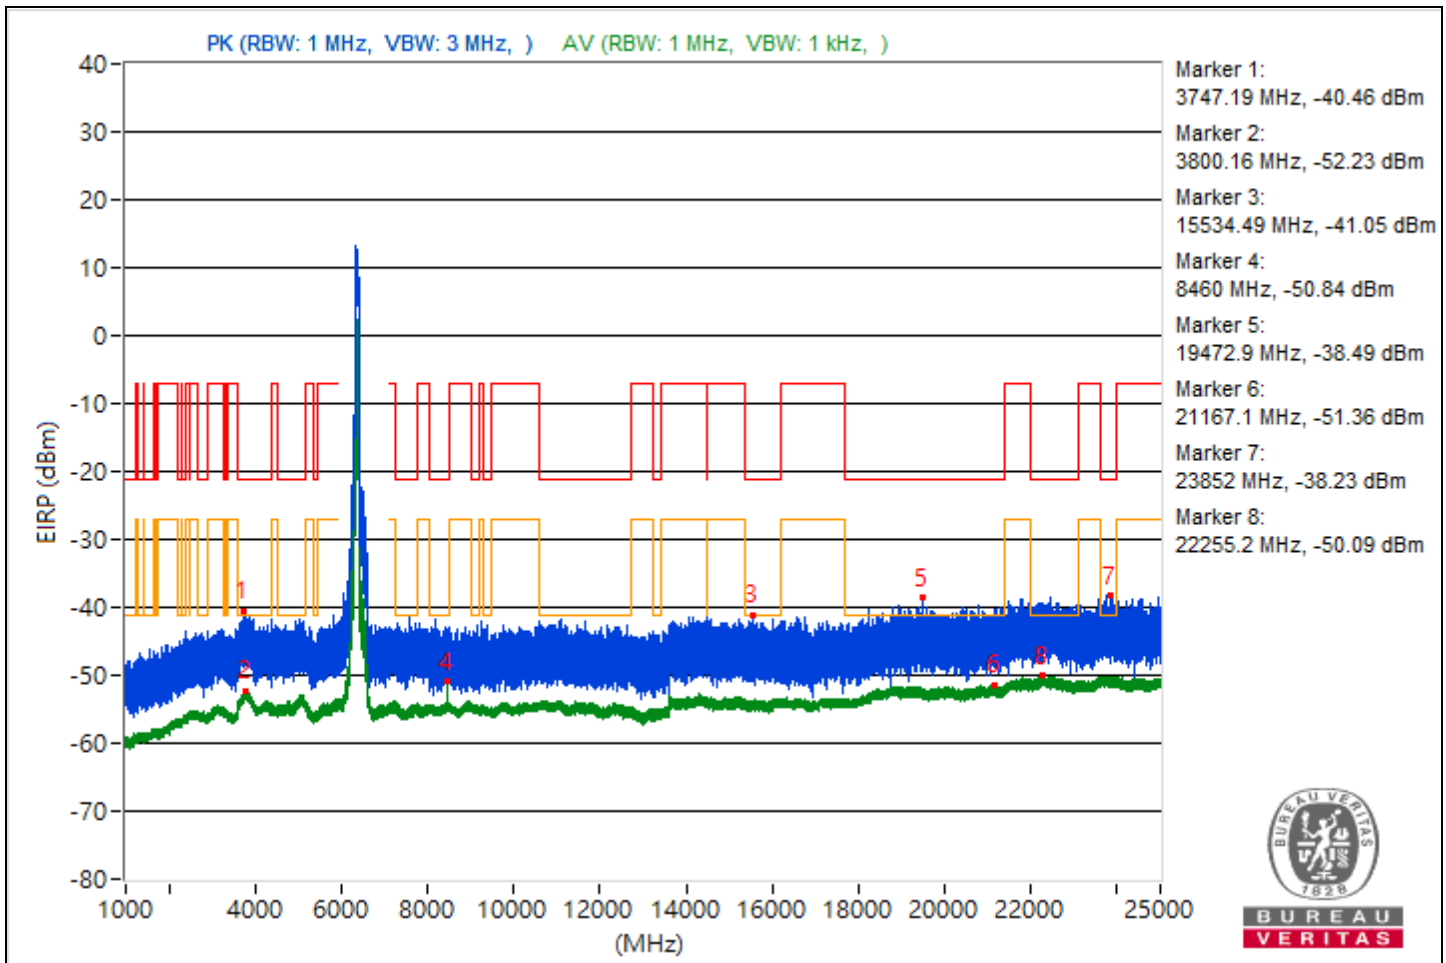


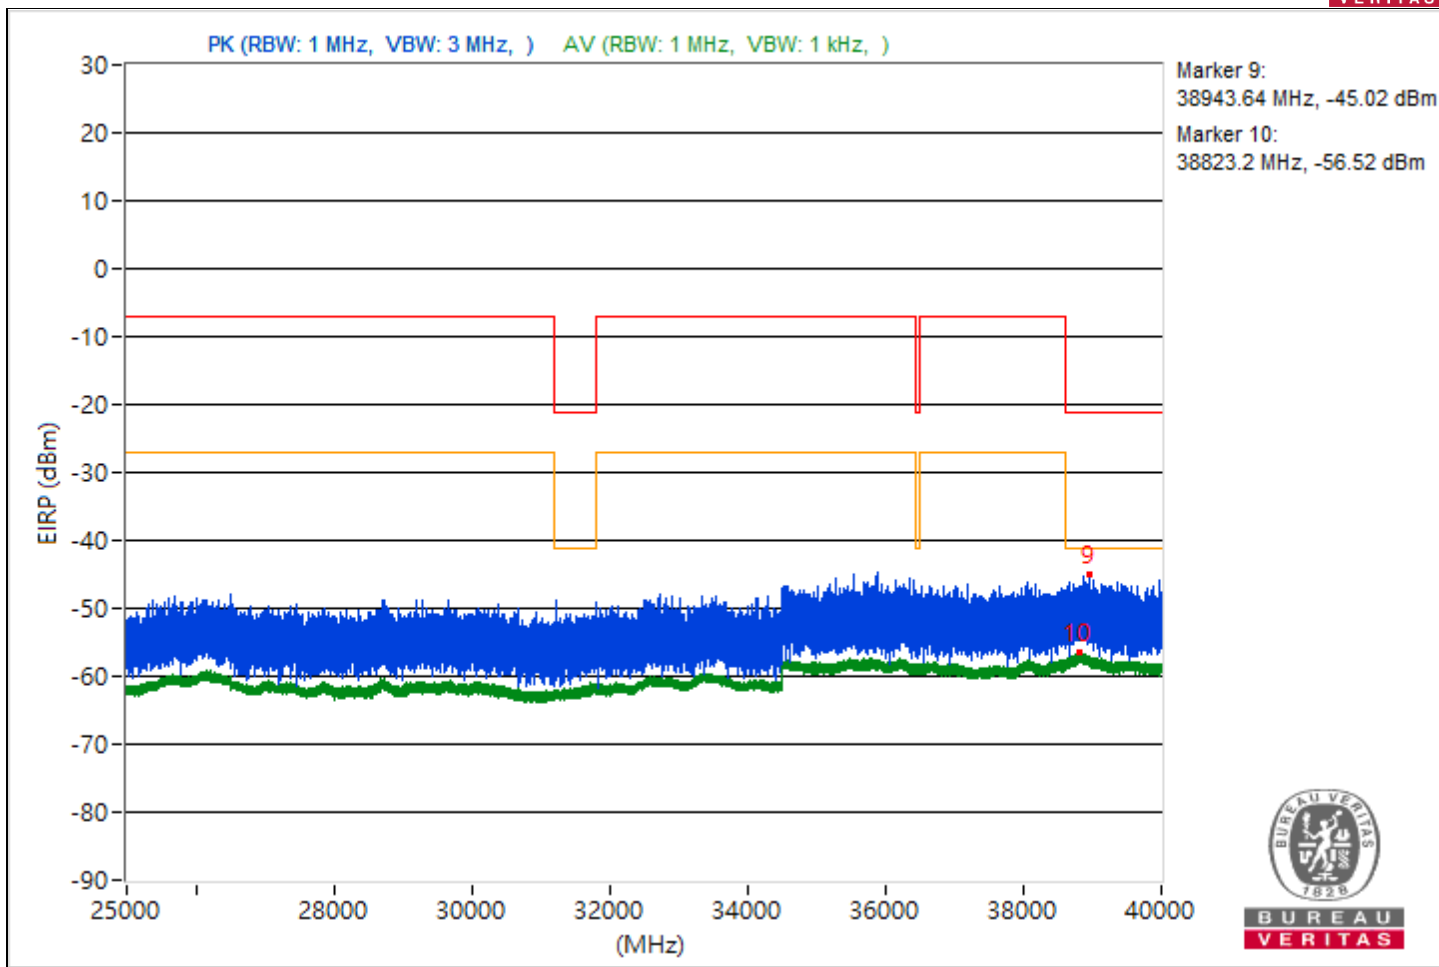


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.99	54.7 PK	74	-19.3	-45.48	4.92	-40.56
2	3770.91	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	14489.69	54.37 PK	74	-19.63	-45.81	4.92	-40.89
4	14482.13	41.9 AV	54	-12.1	-58.28	4.92	-53.36
5	20393	55.57 PK	74	-18.43	-44.61	4.92	-39.69
6	21053.4	43.92 AV	54	-10.08	-56.26	4.92	-51.34
7	22505.8	58.51 PK	74	-15.49	-41.67	4.92	-36.75
8	23805.6	45.25 AV	54	-8.75	-54.93	4.92	-50.01
9	38633.69	49.6 PK	74	-24.4	-50.58	4.92	-45.66
10	38821.51	38.78 AV	54	-15.22	-61.4	4.92	-56.48

Note: Margin value = Emission Level - Limit value

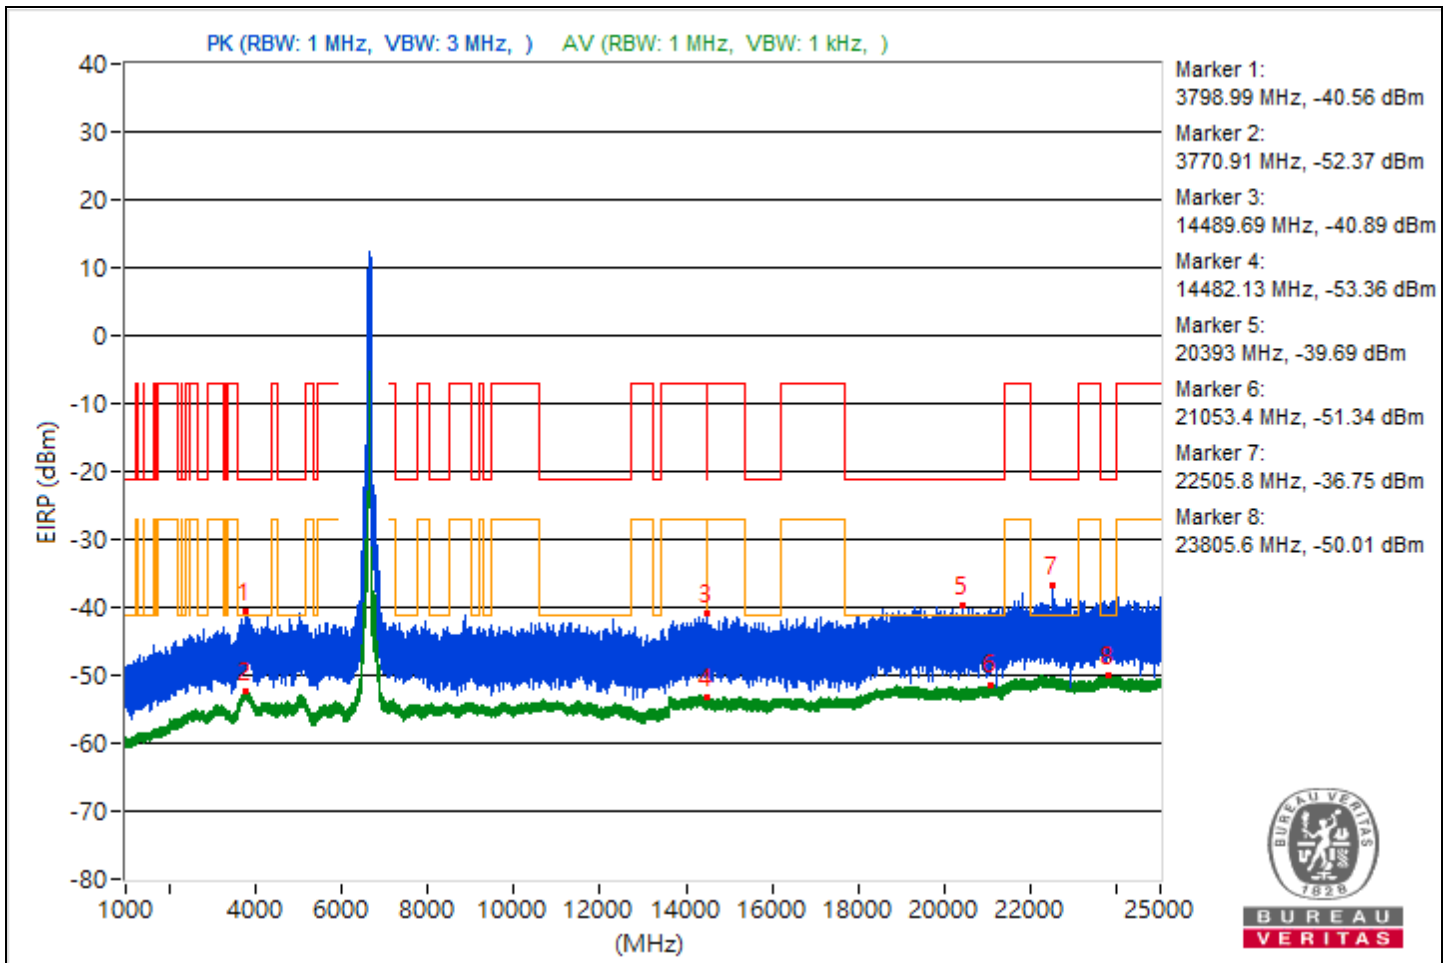

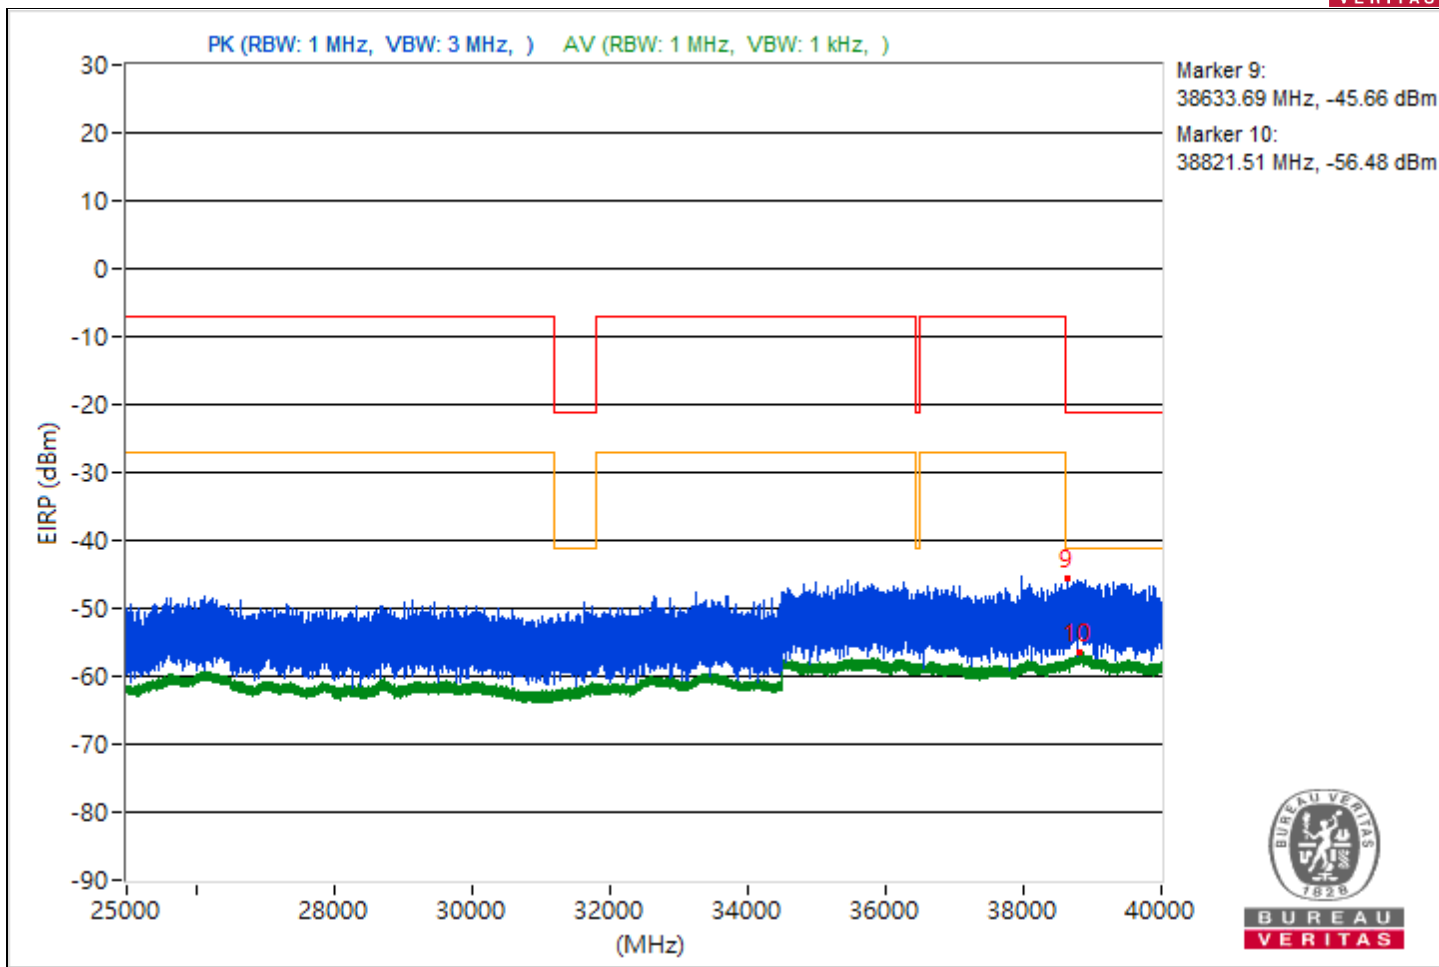





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5871.38	69.66 PK	88.26	-18.6	-30.52	4.92	-25.6
2	3809.41	42.94 AV	54	-11.06	-57.24	4.92	-52.32
3	15600.36	54.95 PK	74	-19.05	-45.23	4.92	-40.31
4	8033.33	46.96 AV	54	-7.04	-53.22	4.92	-48.3
5	19976.1	55.63 PK	74	-18.37	-44.55	4.92	-39.63
6	18819.5	43.83 AV	54	-10.17	-56.35	4.92	-51.43
7	22568.3	56.97 PK	74	-17.03	-43.21	4.92	-38.29
8	23774.9	45.1 AV	54	-8.9	-55.08	4.92	-50.16
9	39074.31	49.54 PK	74	-24.46	-50.64	4.92	-45.72
10	38830.76	38.69 AV	54	-15.31	-61.49	4.92	-56.57

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

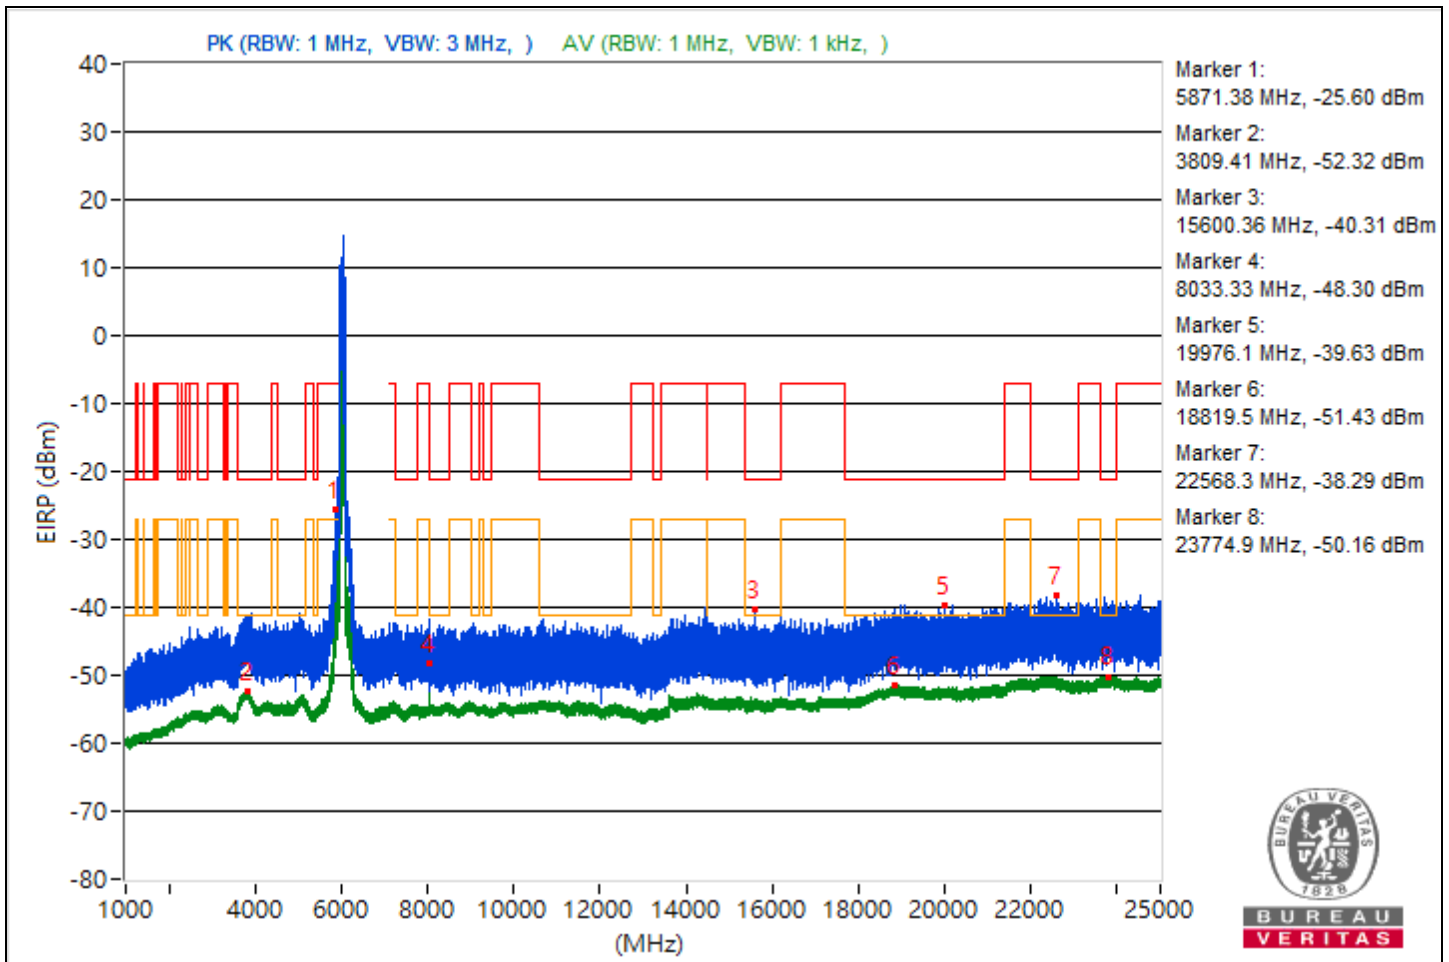


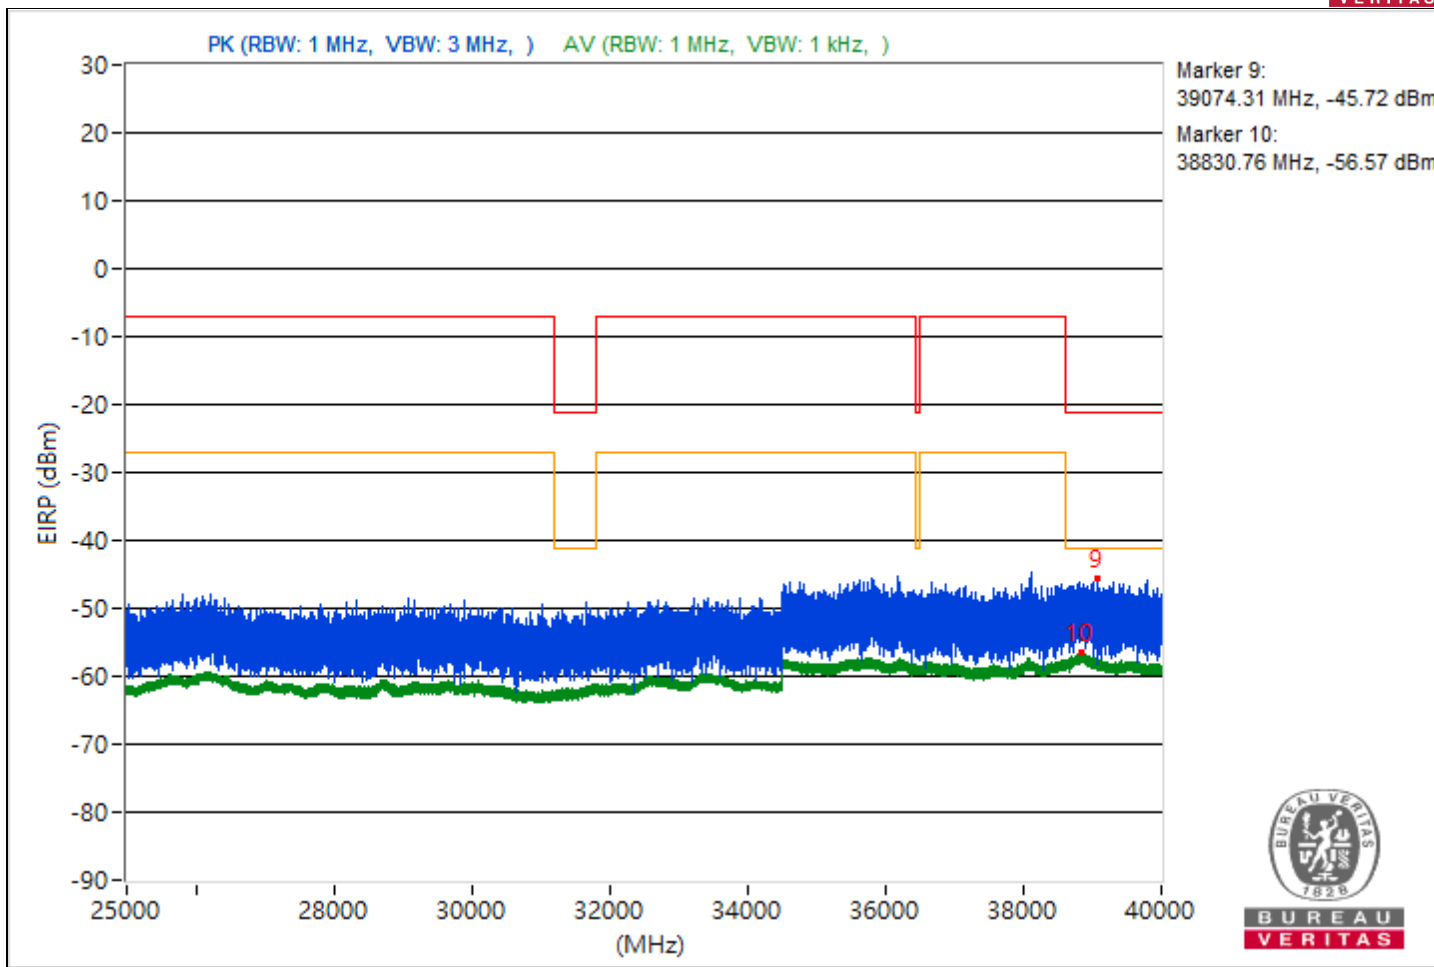


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.14	54.5 PK	74	-19.5	-45.68	4.92	-40.76
2	3853.98	42.86 AV	54	-11.14	-57.32	4.92	-52.4
3	15409.78	53.59 PK	74	-20.41	-46.59	4.92	-41.67
4	8460	44.77 AV	54	-9.23	-55.41	4.92	-50.49
5	19538.1	55.87 PK	74	-18.13	-44.31	4.92	-39.39
6	21124.8	43.95 AV	54	-10.05	-56.23	4.92	-51.31
7	23950	57.78 PK	74	-16.22	-42.4	4.92	-37.48
8	22238	45.33 AV	54	-8.67	-54.85	4.92	-49.93
9	38667.47	49.98 PK	74	-24.02	-50.2	4.92	-45.28
10	38904.27	38.74 AV	54	-15.26	-61.44	4.92	-56.52

Note: Margin value = Emission Level - Limit value

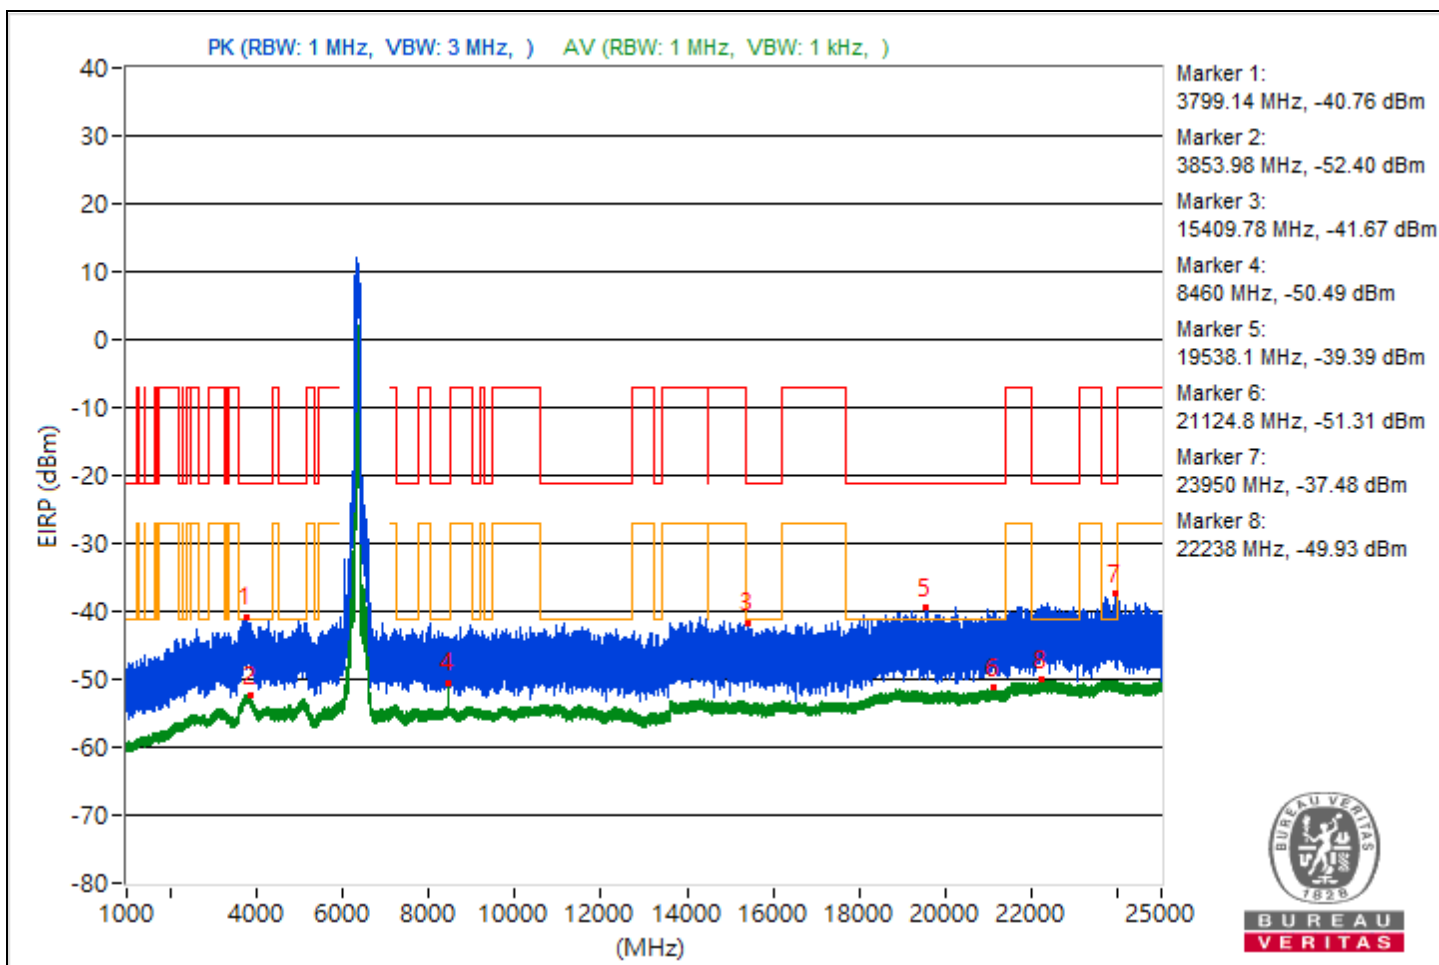

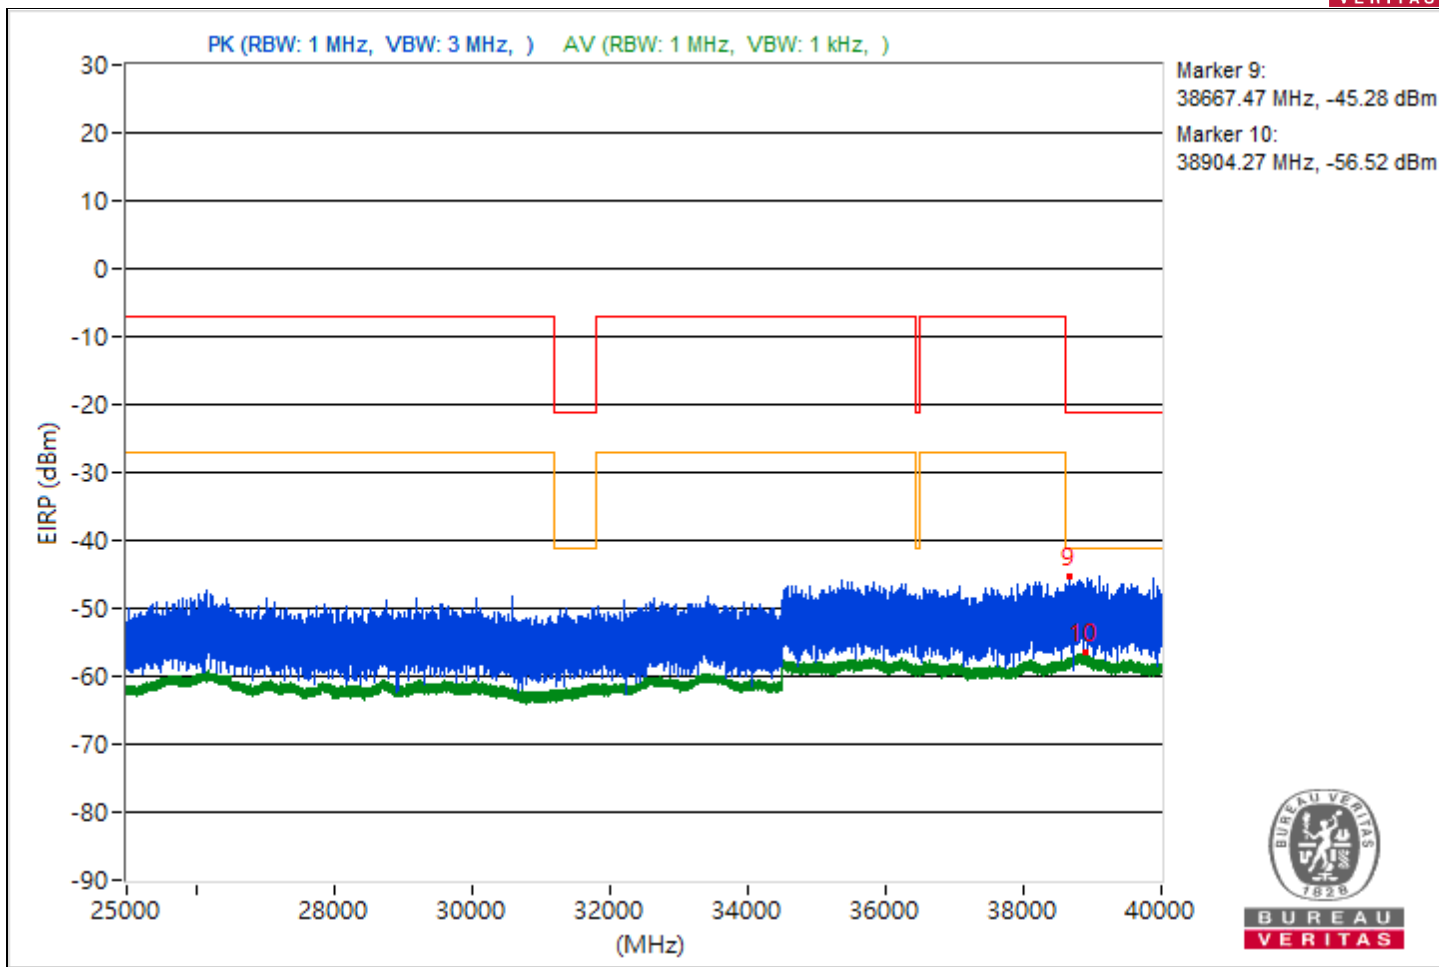




BUREAU VERITAS


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3682.32	54.32 PK	74	-19.68	-45.86	4.92	-40.94
2	3828.23	42.89 AV	54	-11.11	-57.29	4.92	-52.37
3	15780.36	53.37 PK	74	-20.63	-46.81	4.92	-41.89
4	14495.64	41.96 AV	54	-12.04	-58.22	4.92	-53.3
5	21192.1	55.41 PK	74	-18.59	-44.77	4.92	-39.85
6	21181	43.79 AV	54	-10.21	-56.39	4.92	-51.47
7	22562.9	56.58 PK	74	-17.42	-43.6	4.92	-38.68
8	22402.7	45.14 AV	54	-8.86	-55.04	4.92	-50.12
9	38704.8	50.27 PK	74	-23.73	-49.91	4.92	-44.99
10	38839.64	38.64 AV	54	-15.36	-61.54	4.92	-56.62

Note: Margin value = Emission Level - Limit value

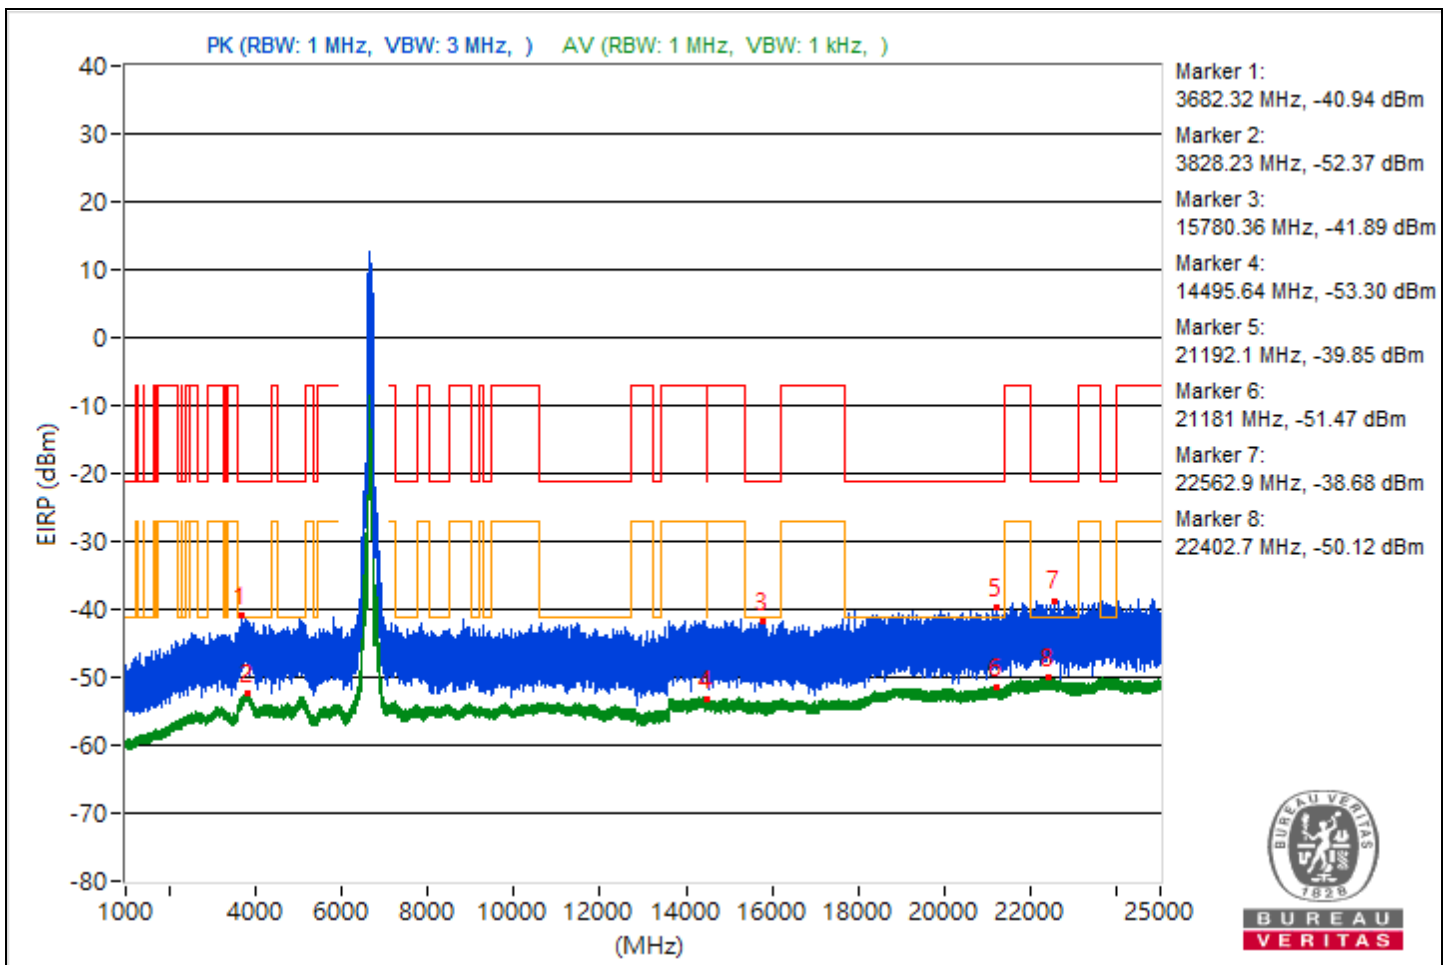

BUREAU VERITAS

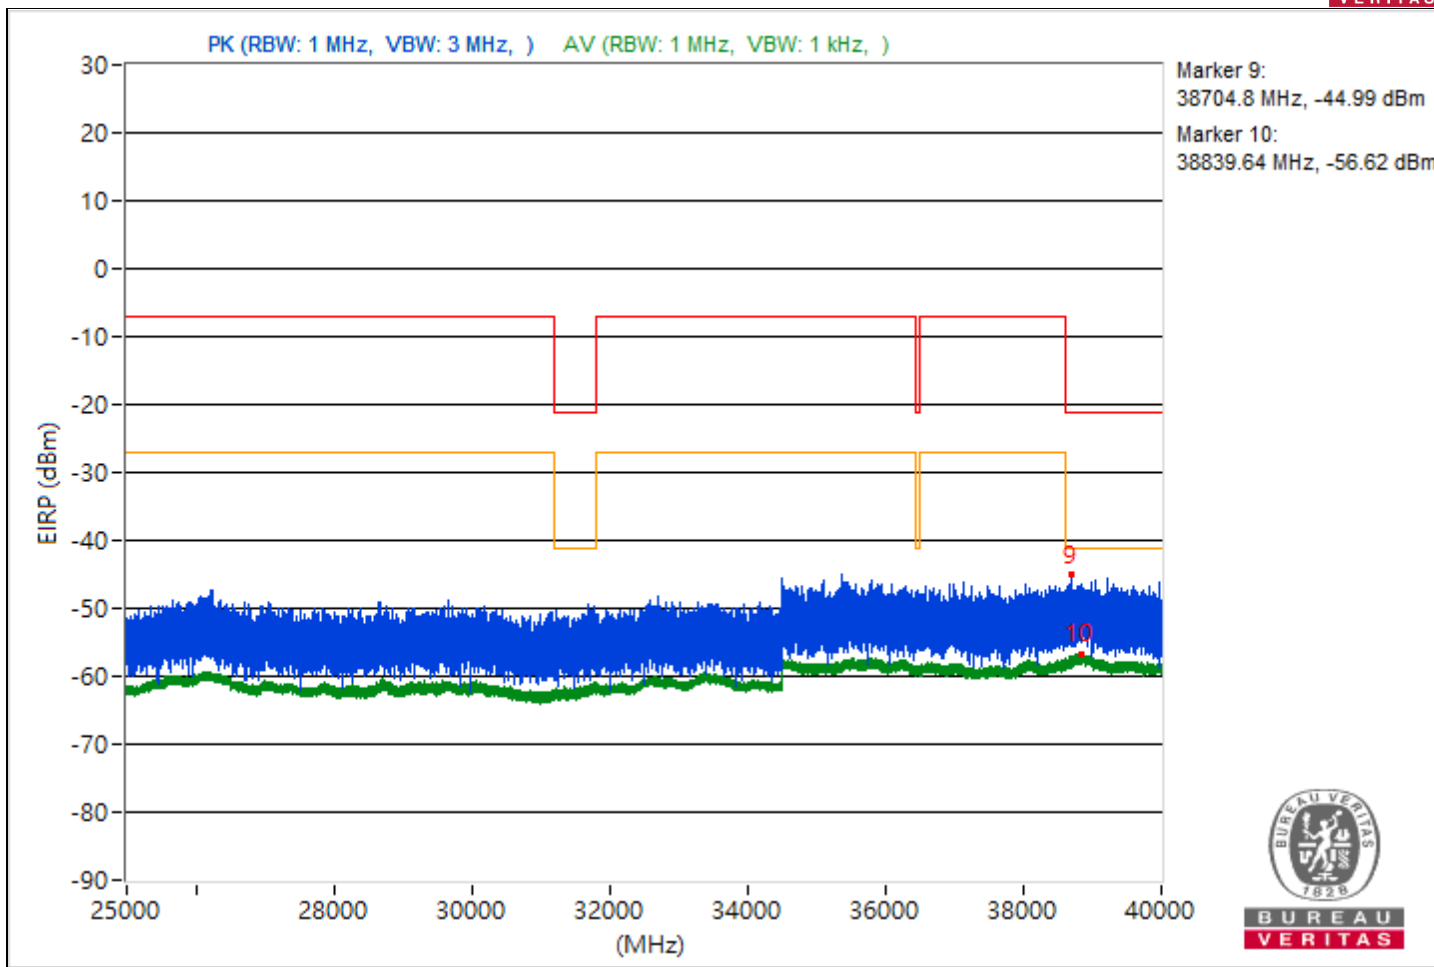

Conducted Band Edges


1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.87	121.33 PK			21.31	4.76	26.07
2	*5955.62	108.73 AV			8.71	4.76	13.47
3	#5924.85	79.84 PK	88.26	-8.42	-20.18	4.76	-15.42
4	#5924.55	67.26 AV	68.26	-1	-32.76	4.76	-28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

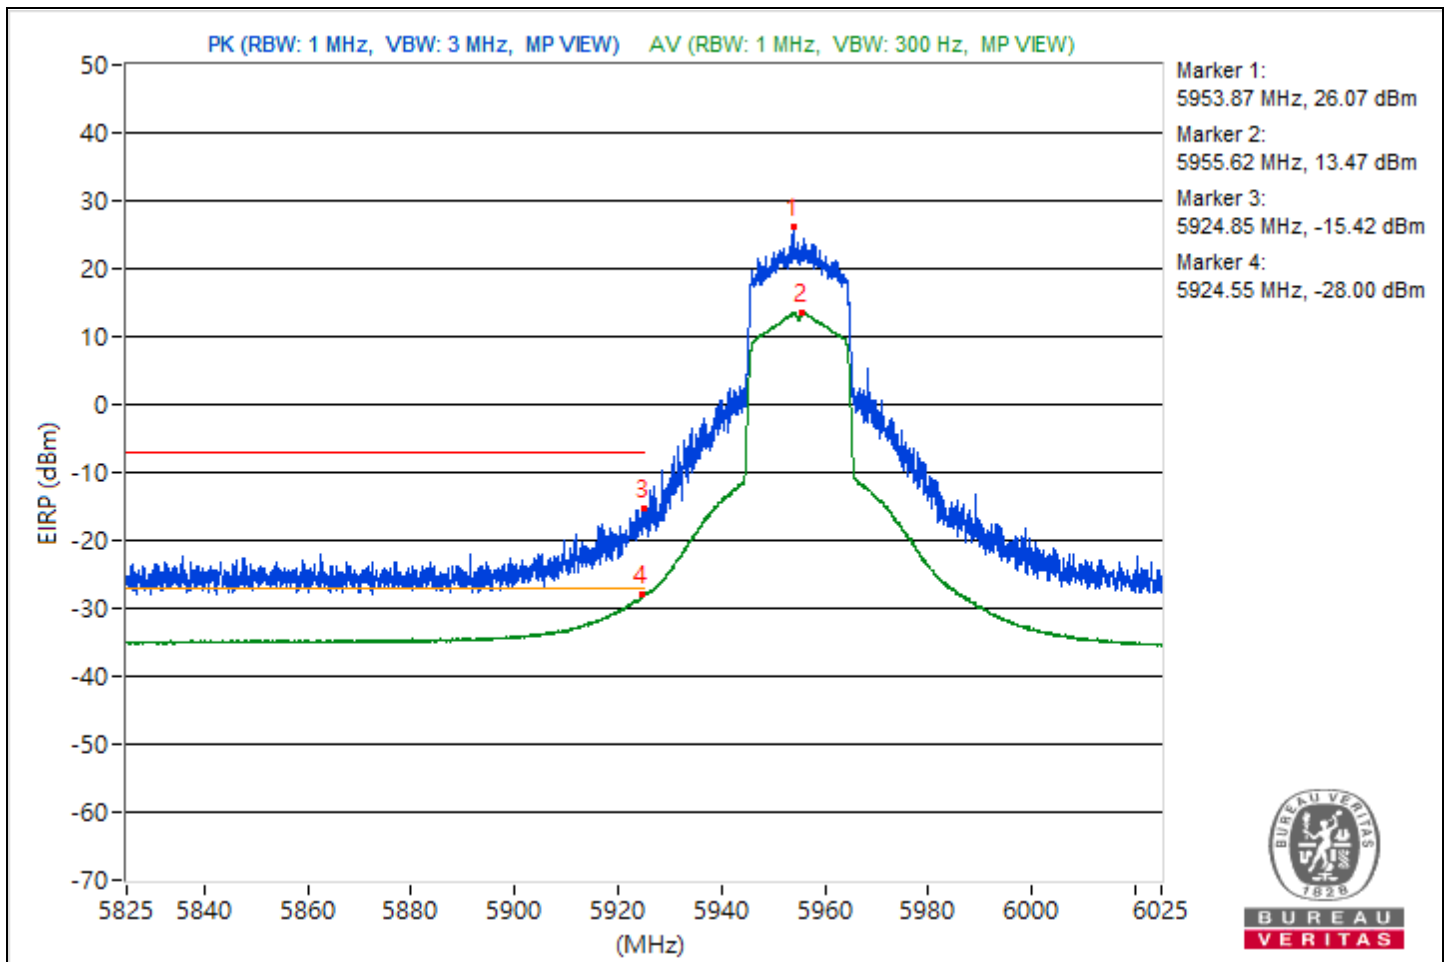


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6853.43	119.75 PK			19.88	4.61	24.49
2	*6854.1	109.92 AV			10.05	4.61	14.66
3	#7211.85	62.04 PK	88.26	-26.22	-37.83	4.61	-33.22
4	#7203.52	50.54 AV	68.26	-17.72	-49.33	4.61	-44.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

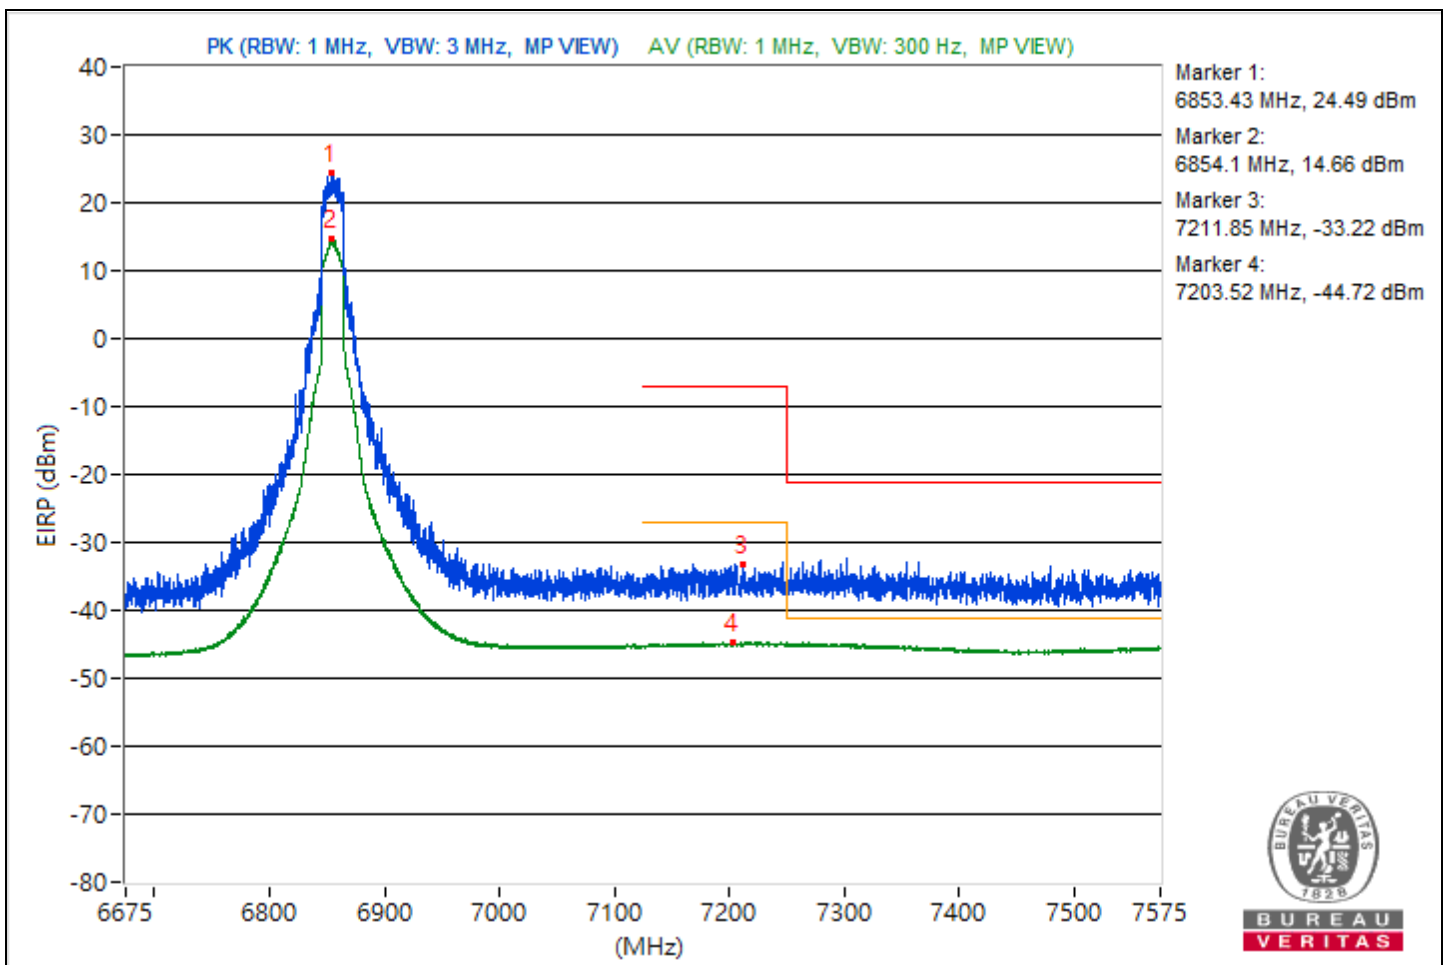


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.75	115.2 PK			15.18	4.76	19.94
2	*5963.77	104.83 AV			4.81	4.76	9.57
3	#5924.52	81.26 PK	88.26	-7	-18.76	4.76	-14
4	#5924.85	67.66 AV	68.26	-0.6	-32.36	4.76	-27.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

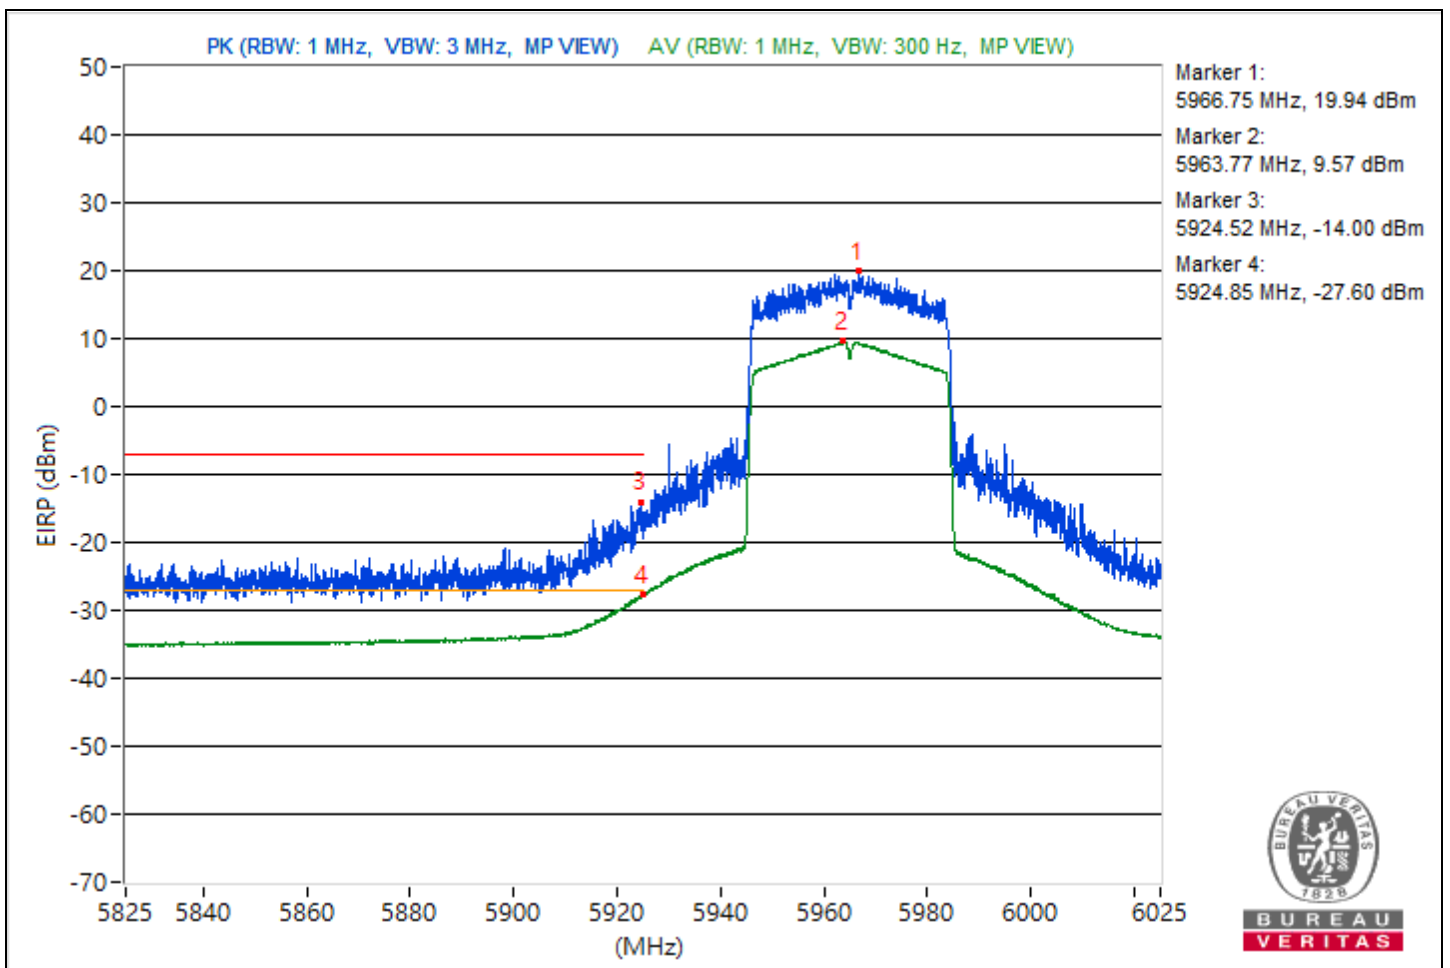


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6836.89	119.3 PK			19.43	4.61	24.04
2	*6843.75	107.65 AV			7.78	4.61	12.39
3	#7202.4	62.8 PK	88.26	-25.46	-37.07	4.61	-32.46
4	#7208.14	50.52 AV	68.26	-17.74	-49.35	4.61	-44.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # " : The radiated frequency is out of the restricted band.

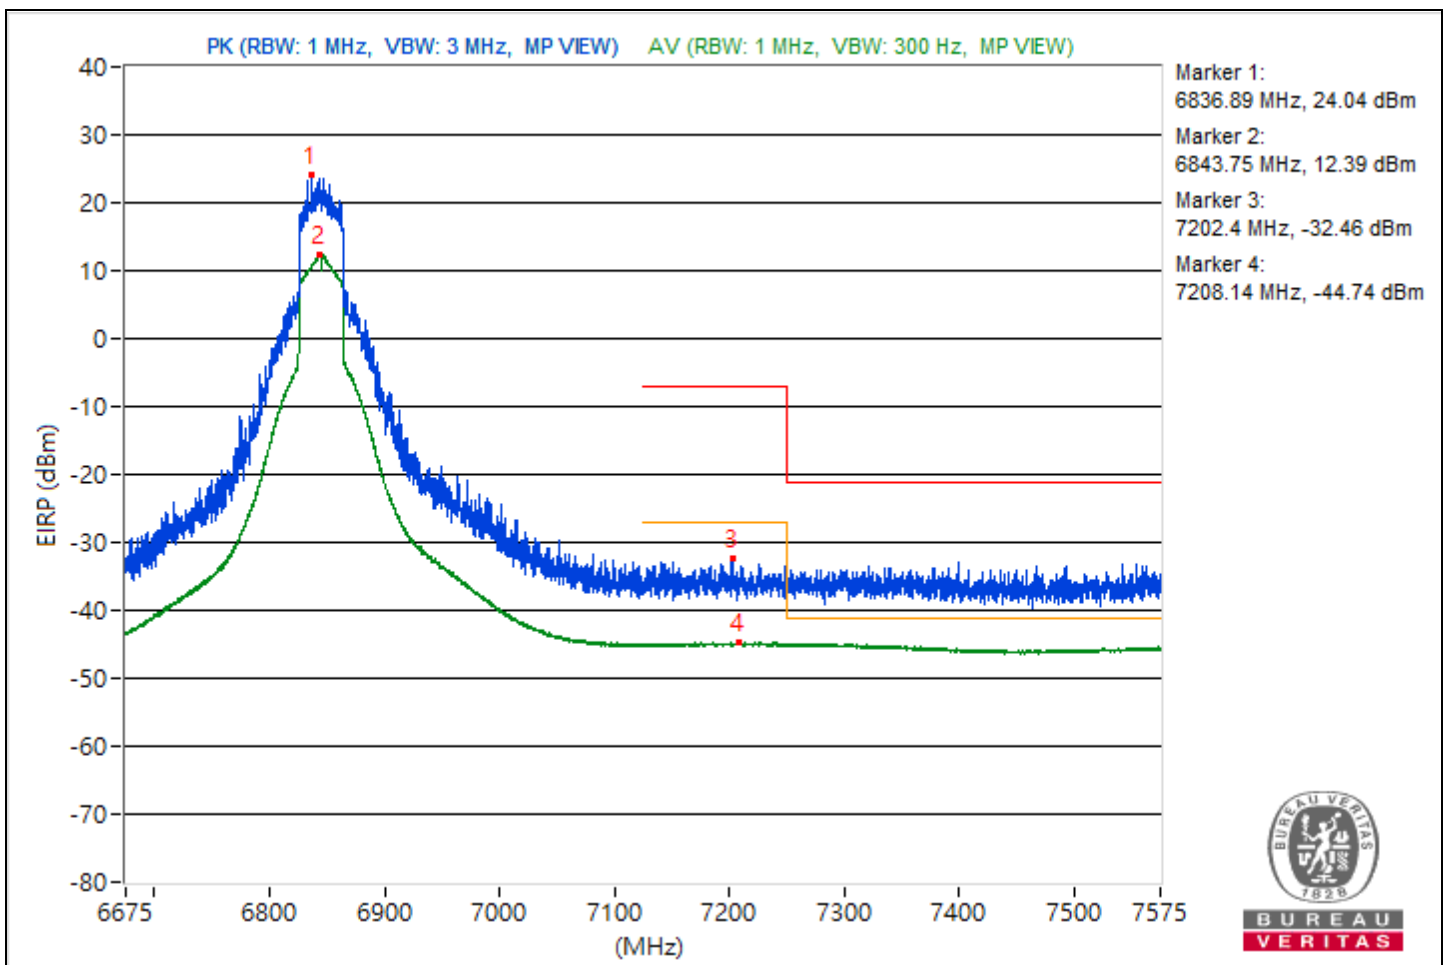


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5981.82	113.26 PK			13.24	4.76	18
2	*5983.57	100.84 AV			0.82	4.76	5.58
3	#5924.98	81.42 PK	88.26	-6.84	-18.6	4.76	-13.84
4	#5924.18	68.04 AV	68.26	-0.22	-31.98	4.76	-27.22

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

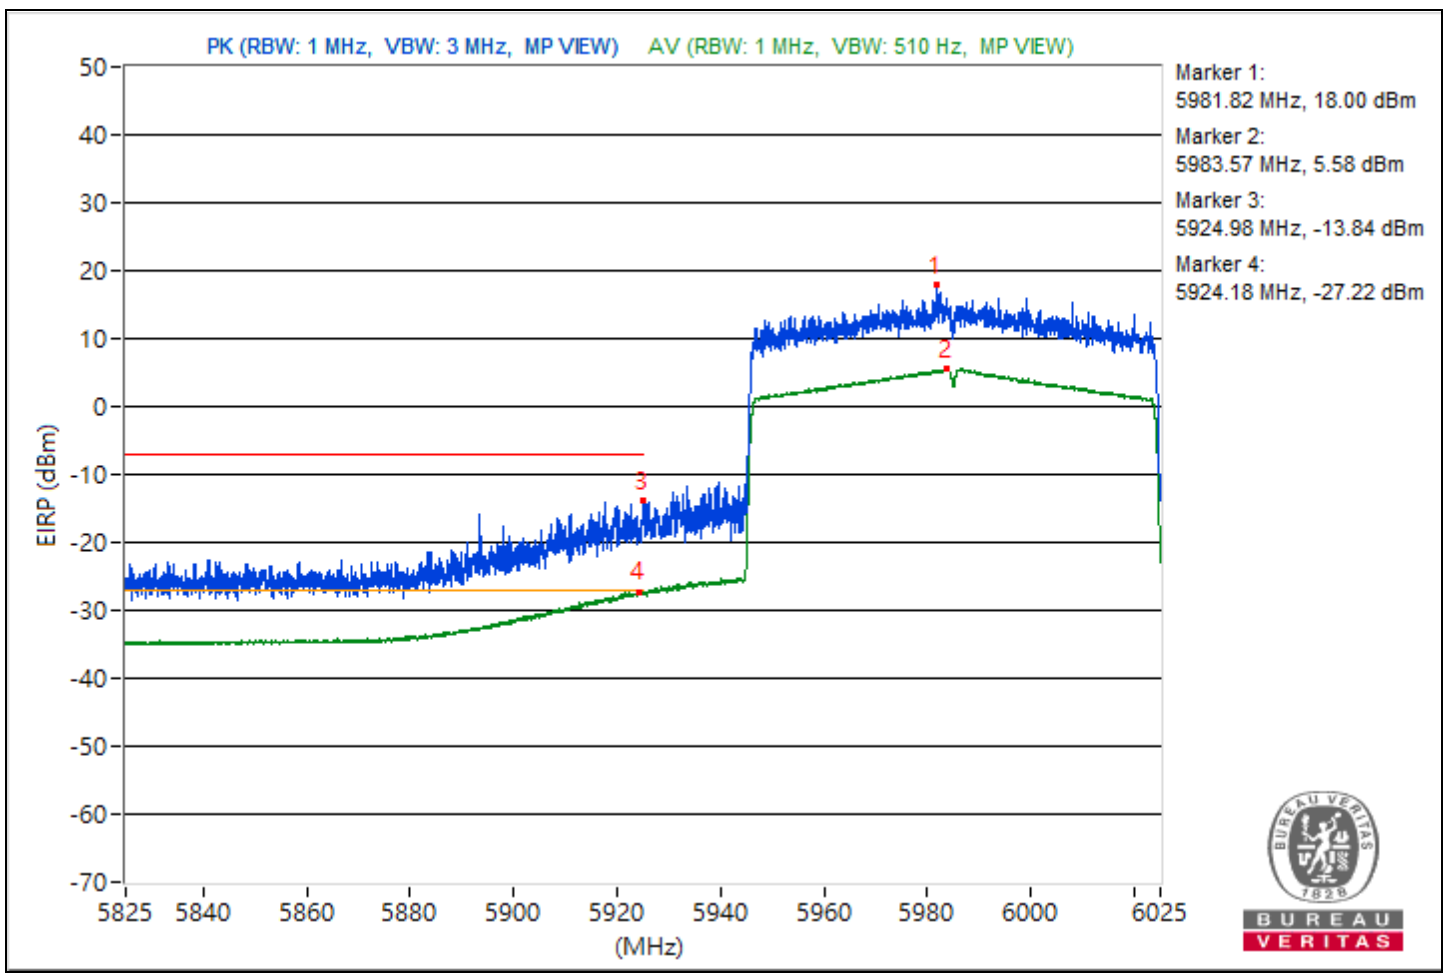


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6773.21	117.24 PK			17.37	4.61	21.98
2	*6786.04	105 AV			5.13	4.61	9.74
3	#7132.76	67.77 PK	88.26	-20.49	-32.1	4.61	-27.49
4	#7126.46	54.25 AV	68.26	-14.01	-45.62	4.61	-41.01

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

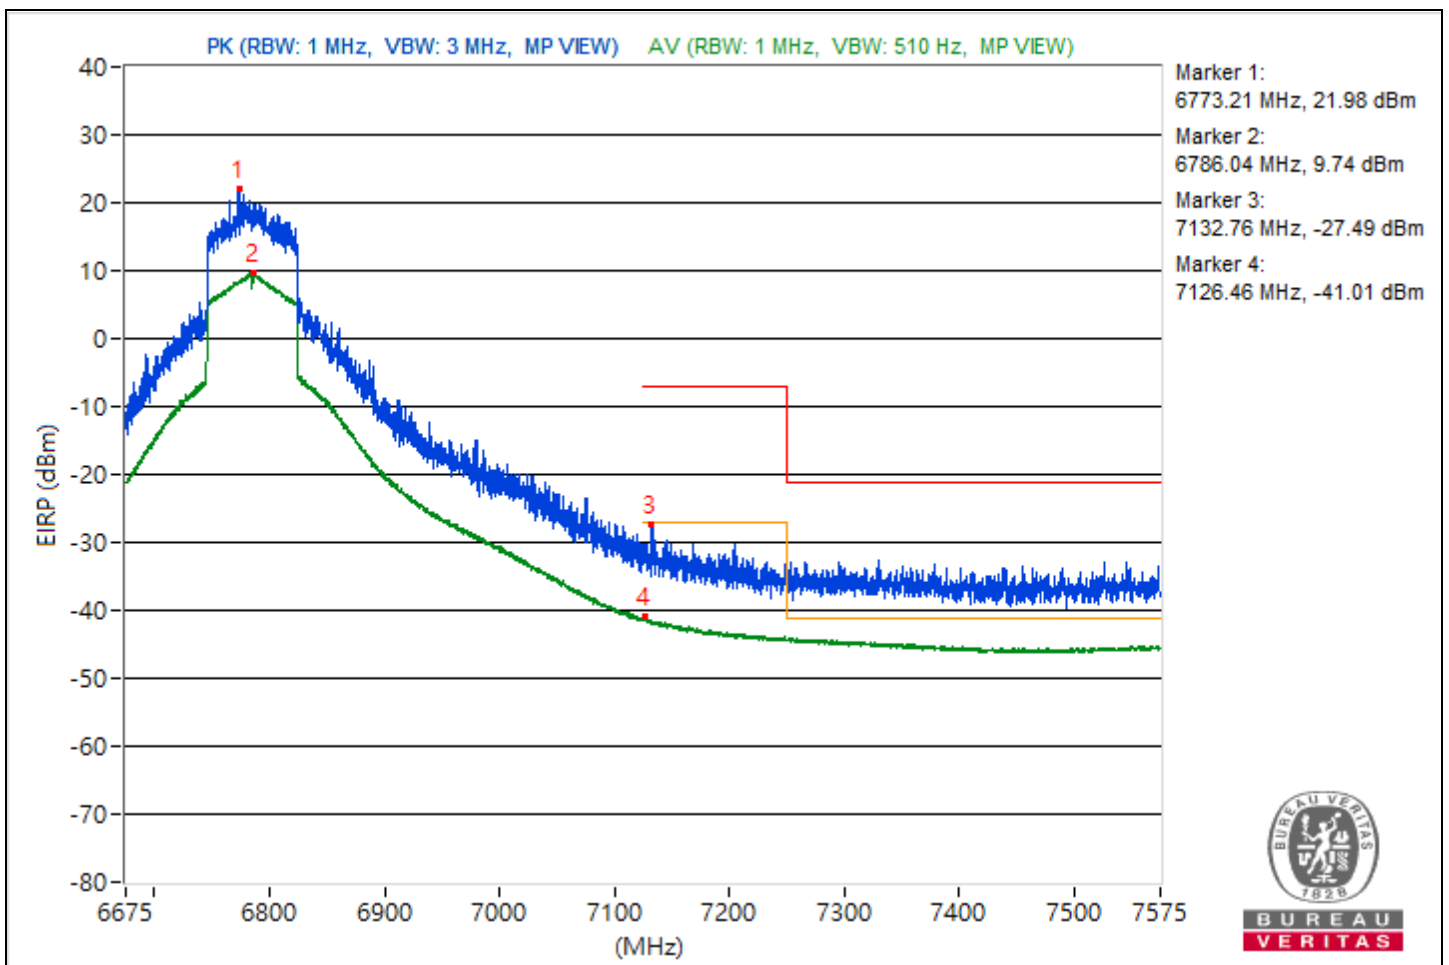


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6022.5	109.06 PK			9.04	4.76	13.8
2	*6023.05	97.34 AV			-2.68	4.76	2.08
3	#5894.48	83.72 PK	88.26	-4.54	-16.3	4.76	-11.54
4	#5923.7	66.94 AV	68.26	-1.32	-33.08	4.76	-28.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

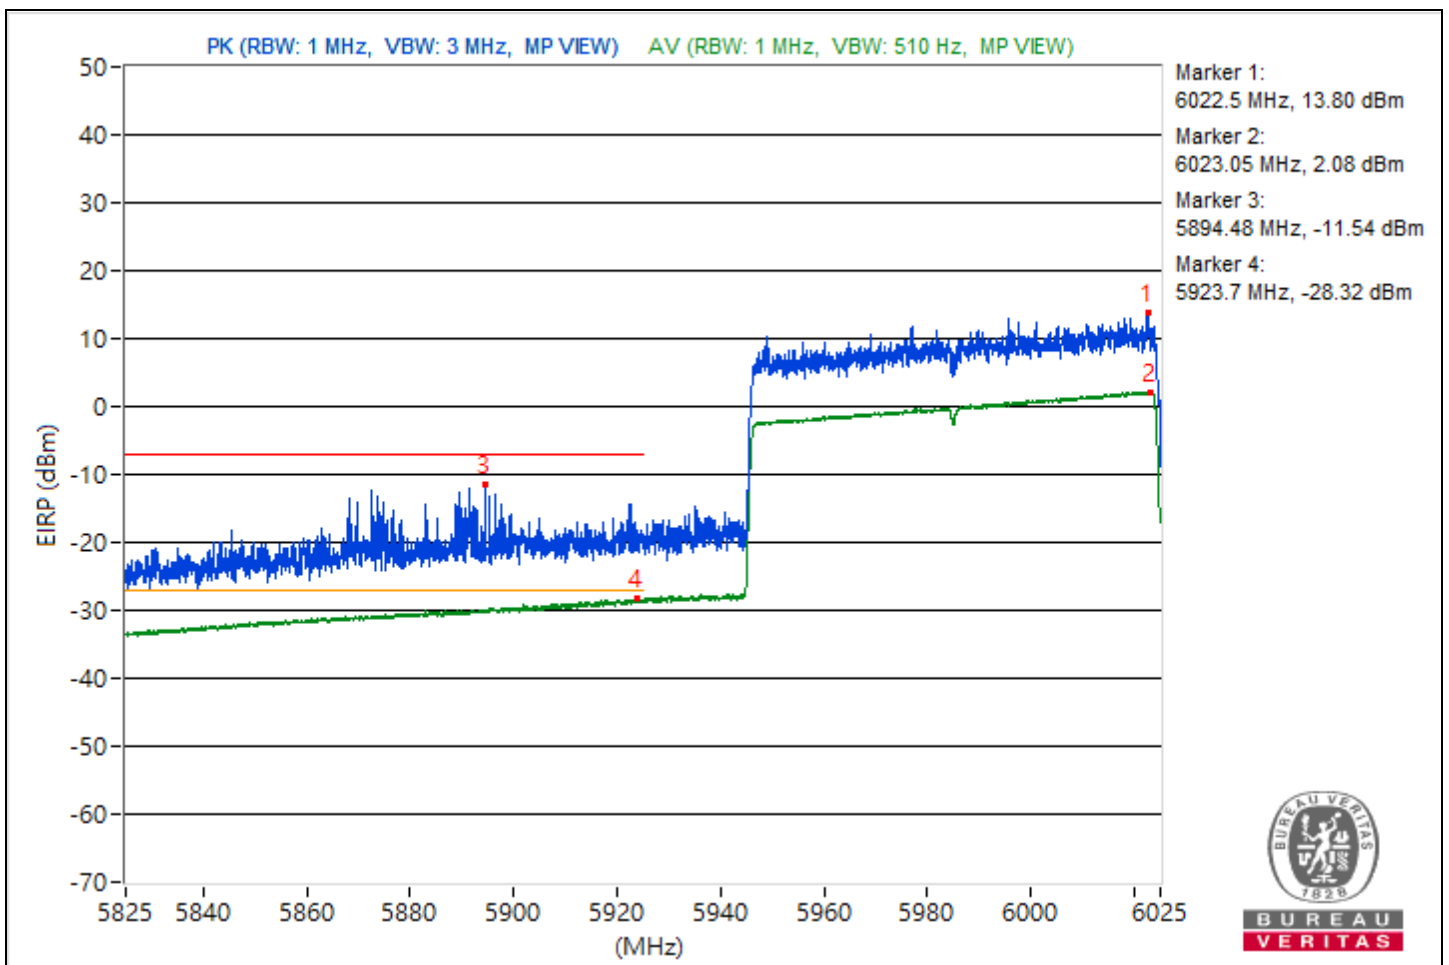


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6689.18	107.21 PK			7.34	4.61	11.95
2	*6675	96.37 AV			-3.5	4.61	1.11
3	#7217.14	62.43 PK	88.26	-25.83	-37.44	4.61	-32.83
4	#7208.59	50.7 AV	68.26	-17.56	-49.17	4.61	-44.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

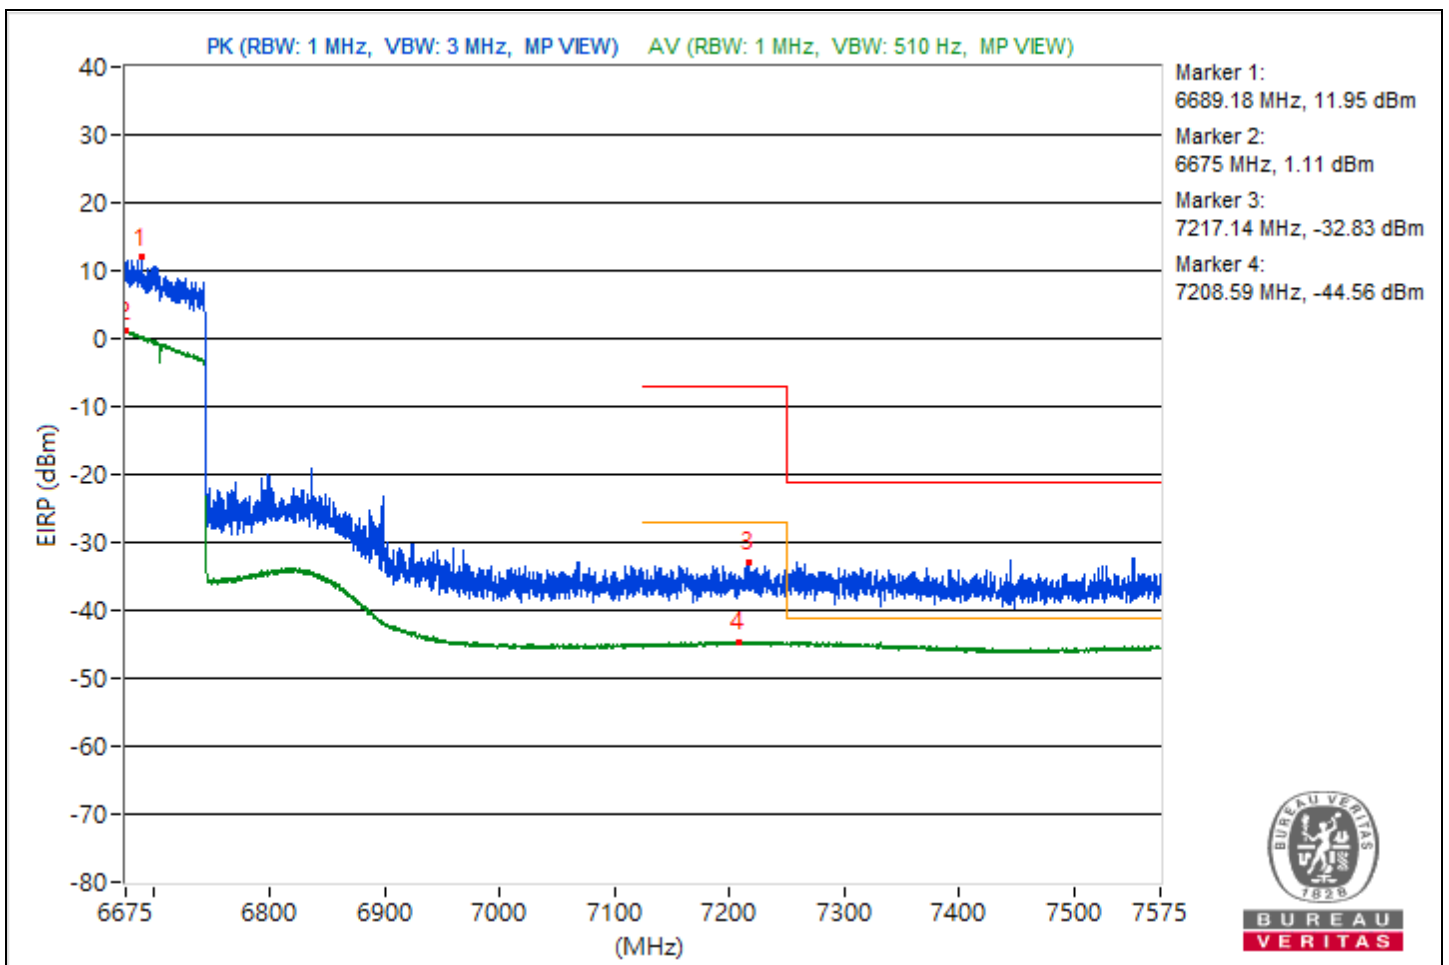


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.2	120.54 PK			20.52	4.76	25.28
2	*5946.52	109.55 AV			9.53	4.76	14.29
3	#5856.37	64.3 PK	88.26	-23.96	-35.72	4.76	-30.96
4	#5882.23	51.5 AV	68.26	-16.76	-48.52	4.76	-43.76

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

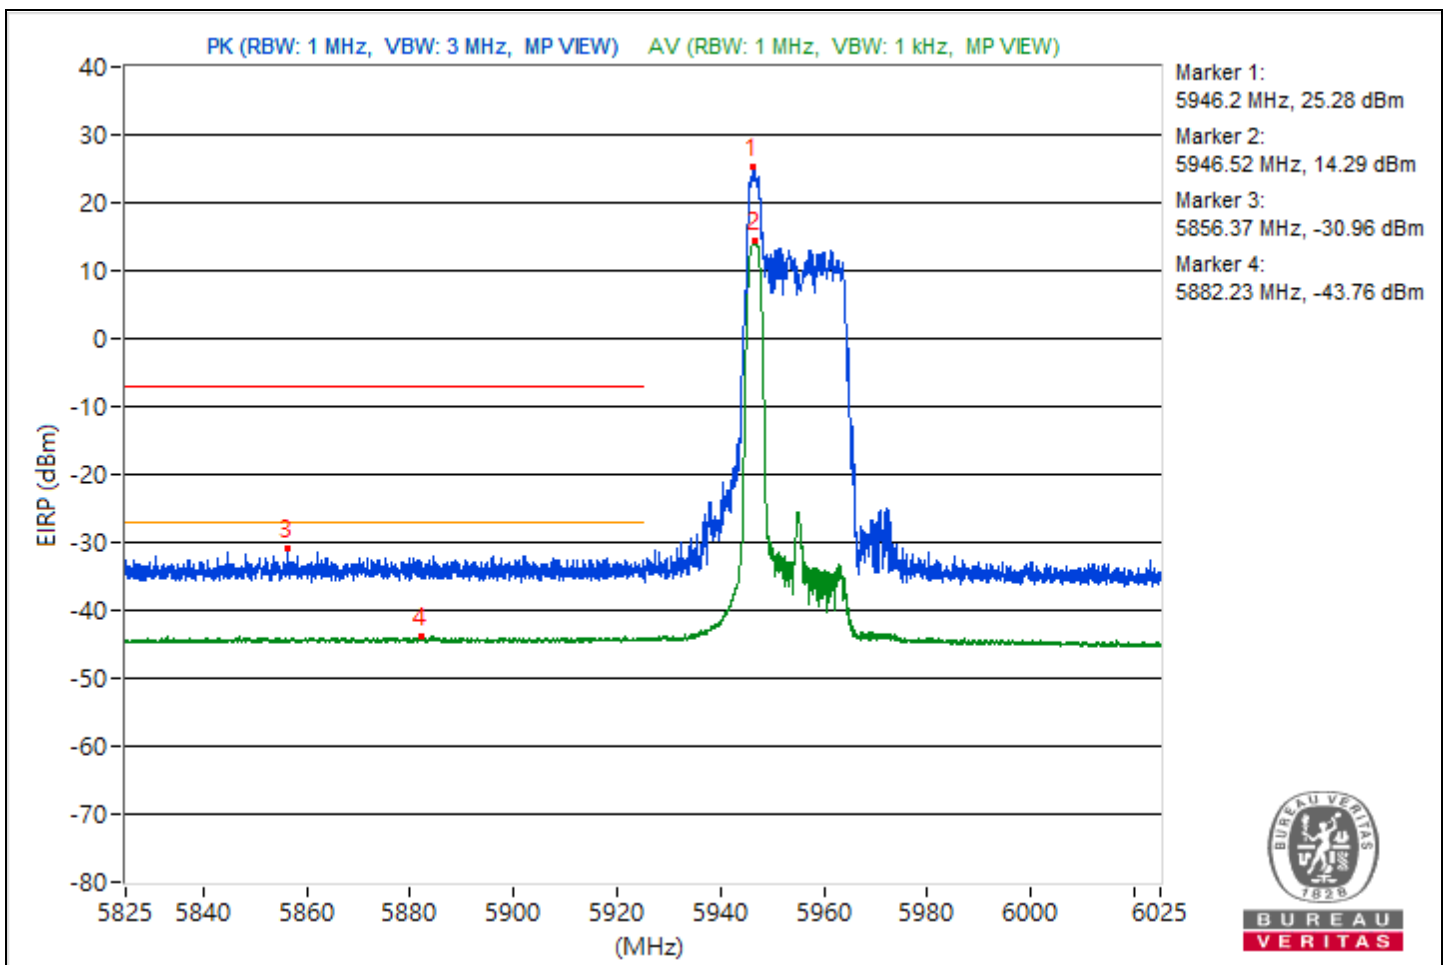


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6864	119.78 PK			19.91	4.61	24.52
2	*6863.66	109.59 AV			9.72	4.61	14.33
3	#7212.19	54.28 PK	88.26	-33.98	-45.59	4.61	-40.98
4	#7197	41.67 AV	68.26	-26.59	-58.2	4.61	-53.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

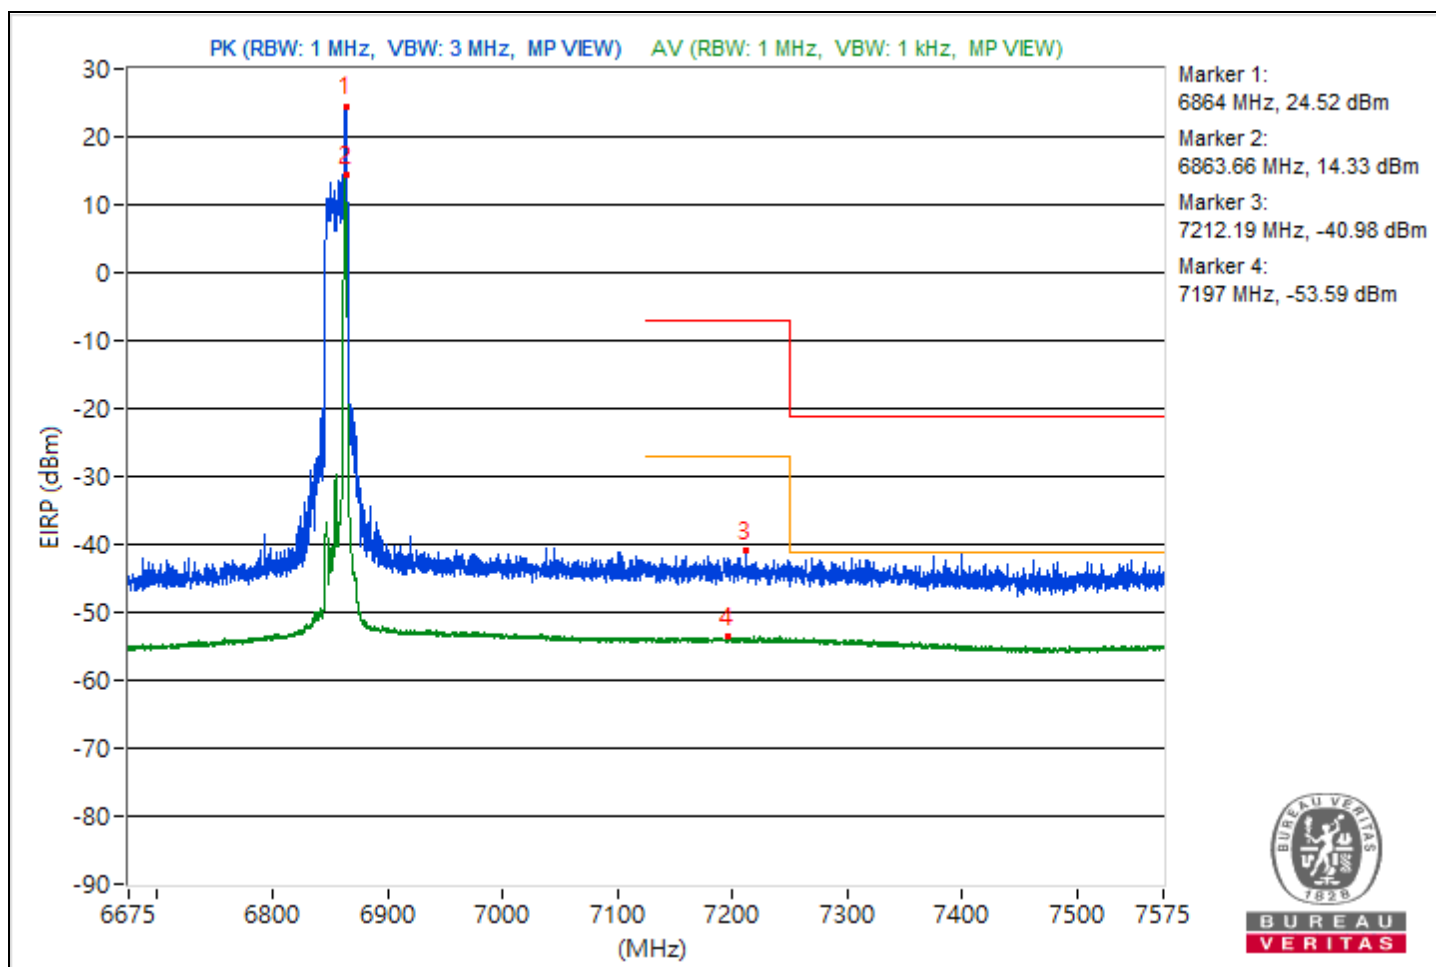


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.12	121.74 PK			21.72	4.76	26.48
2	*5947.18	109.69 AV			9.67	4.76	14.43
3	#5915.75	68.01 PK	88.26	-20.25	-32.01	4.76	-27.25
4	#5924.98	52.34 AV	68.26	-15.92	-47.68	4.76	-42.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

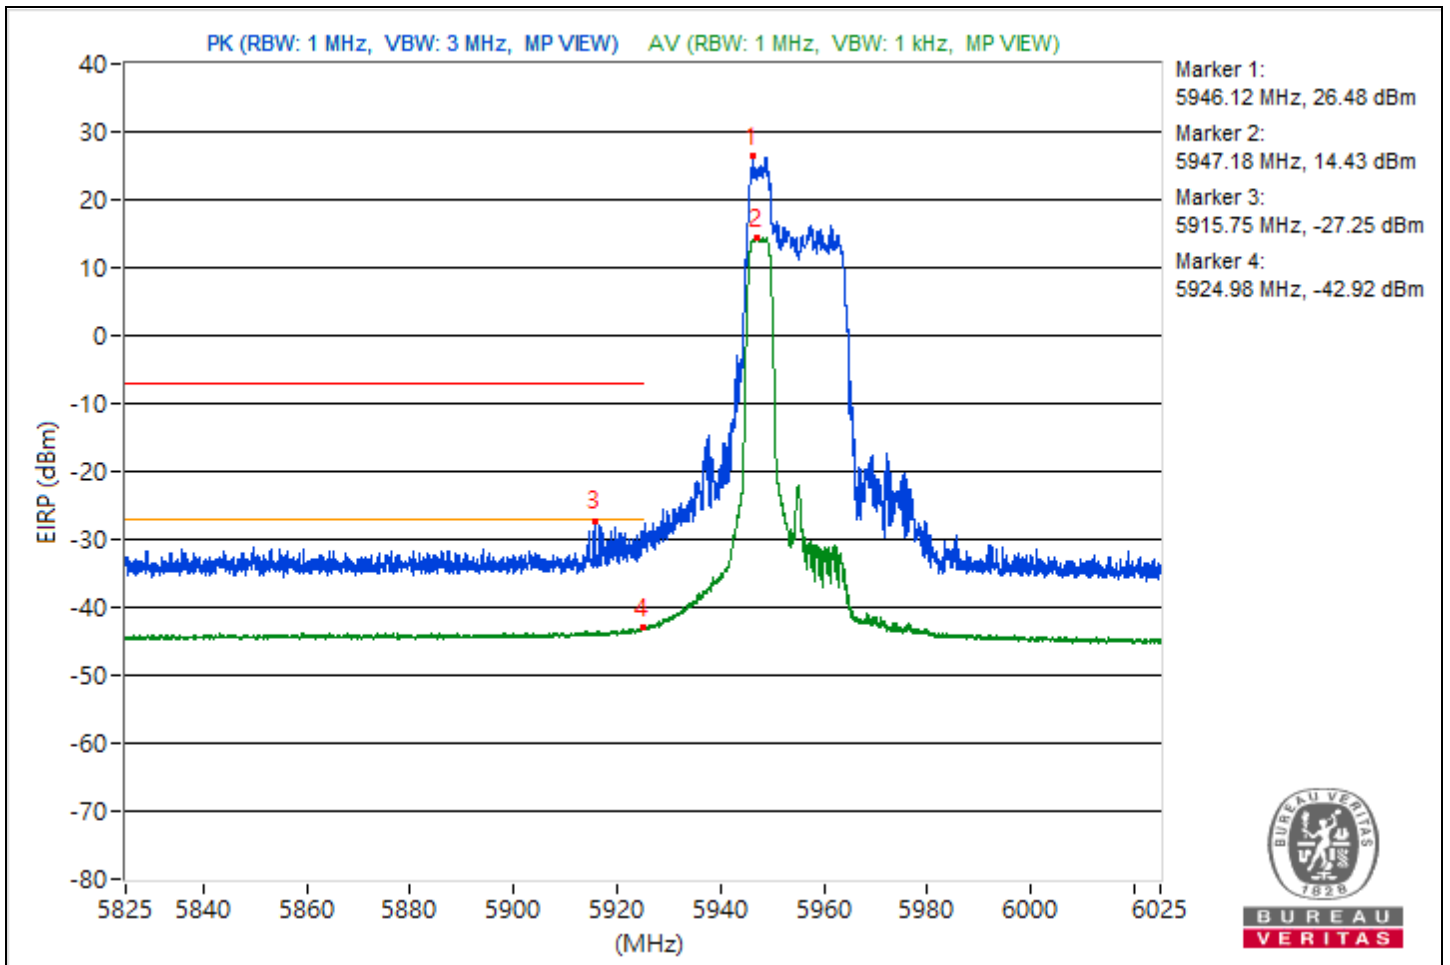


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.2	119.66 PK			19.79	4.61	24.4
2	*6862.54	109.55 AV			9.68	4.61	14.29
3	#7196.21	54.05 PK	88.26	-34.21	-45.82	4.61	-41.21
4	#7128.15	41.72 AV	68.26	-26.54	-58.15	4.61	-53.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

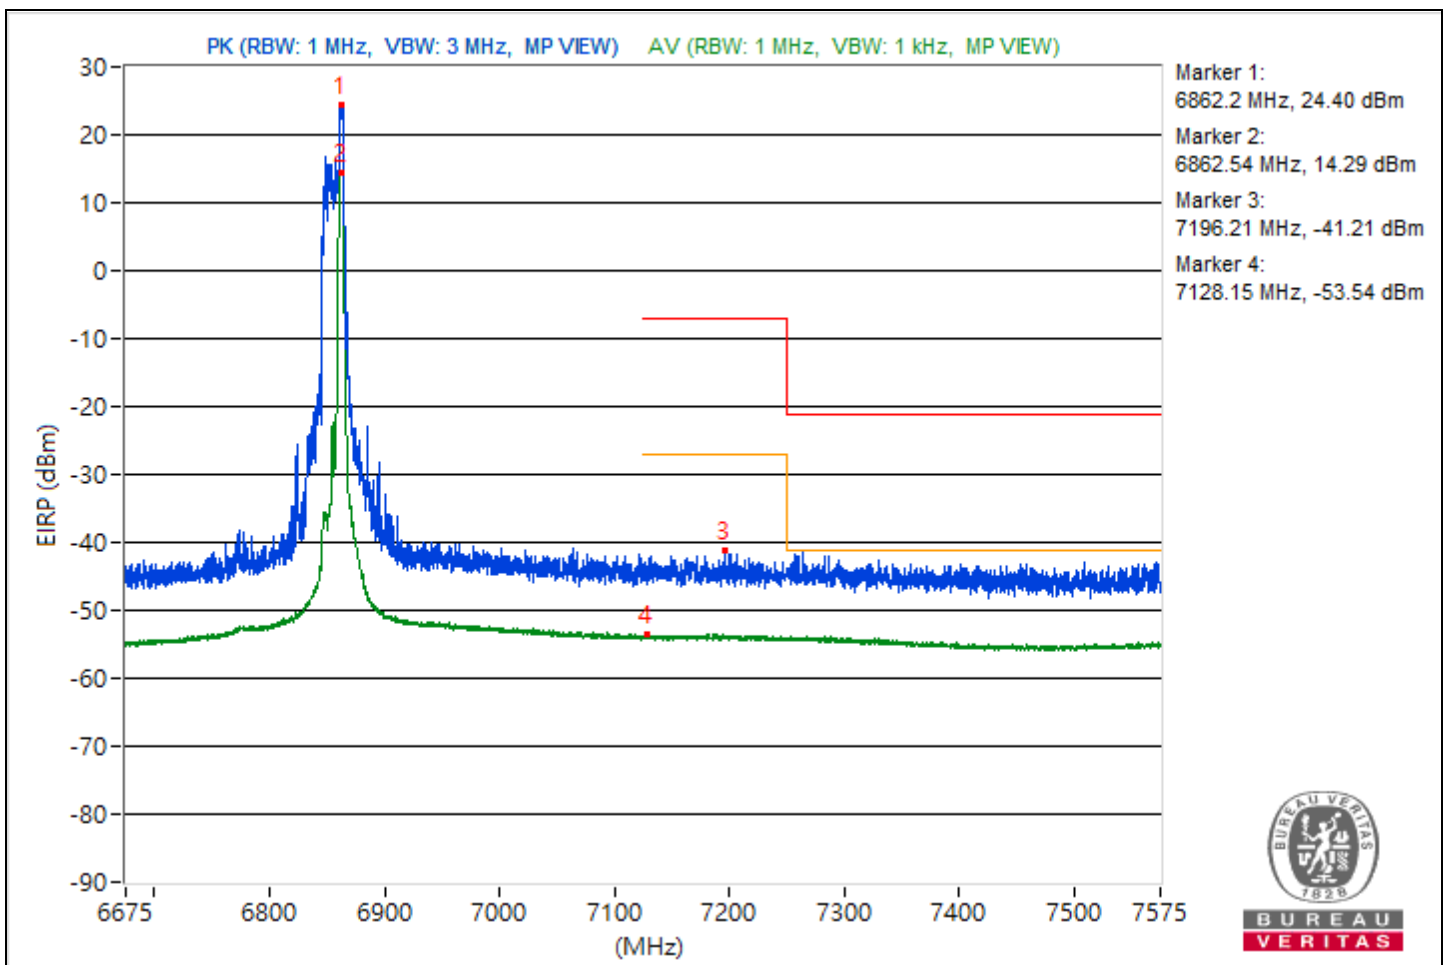


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.75	121.76 PK			21.74	4.76	26.5
2	*5951.65	109.58 AV			9.56	4.76	14.32
3	#5924.57	72.11 PK	88.26	-16.15	-27.91	4.76	-23.15
4	#5924.77	57.07 AV	68.26	-11.19	-42.95	4.76	-38.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

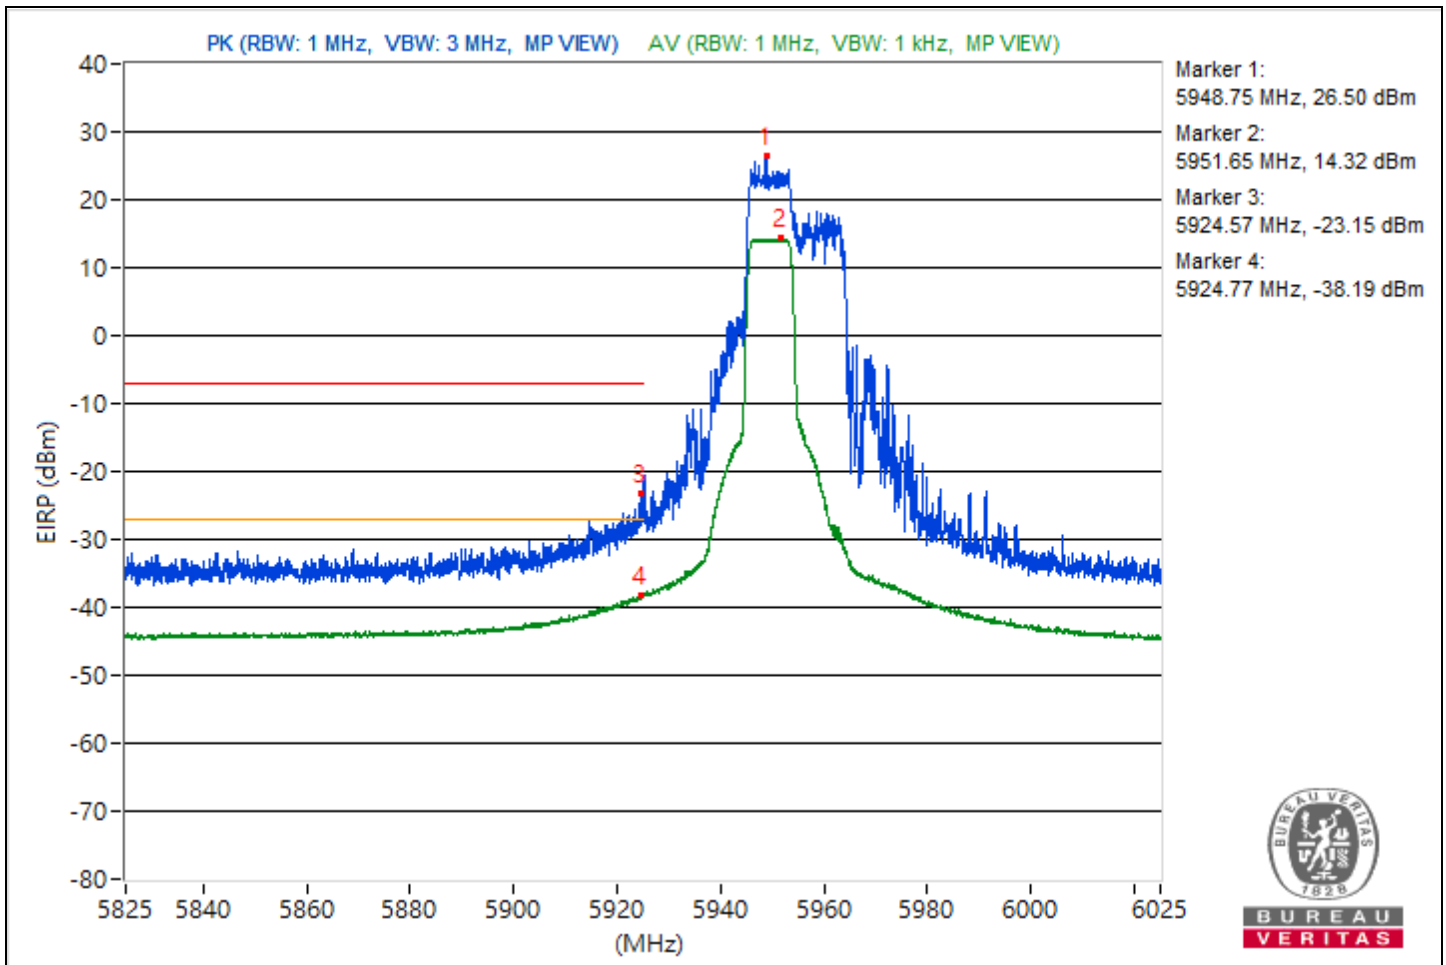


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6861.07	121.44 PK			21.57	4.61	26.18
2	*6860.51	110.32 AV			10.45	4.61	15.06
3	#7128.6	54.08 PK	88.26	-34.18	-45.79	4.61	-41.18
4	#7140.86	41.8 AV	68.26	-26.46	-58.07	4.61	-53.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

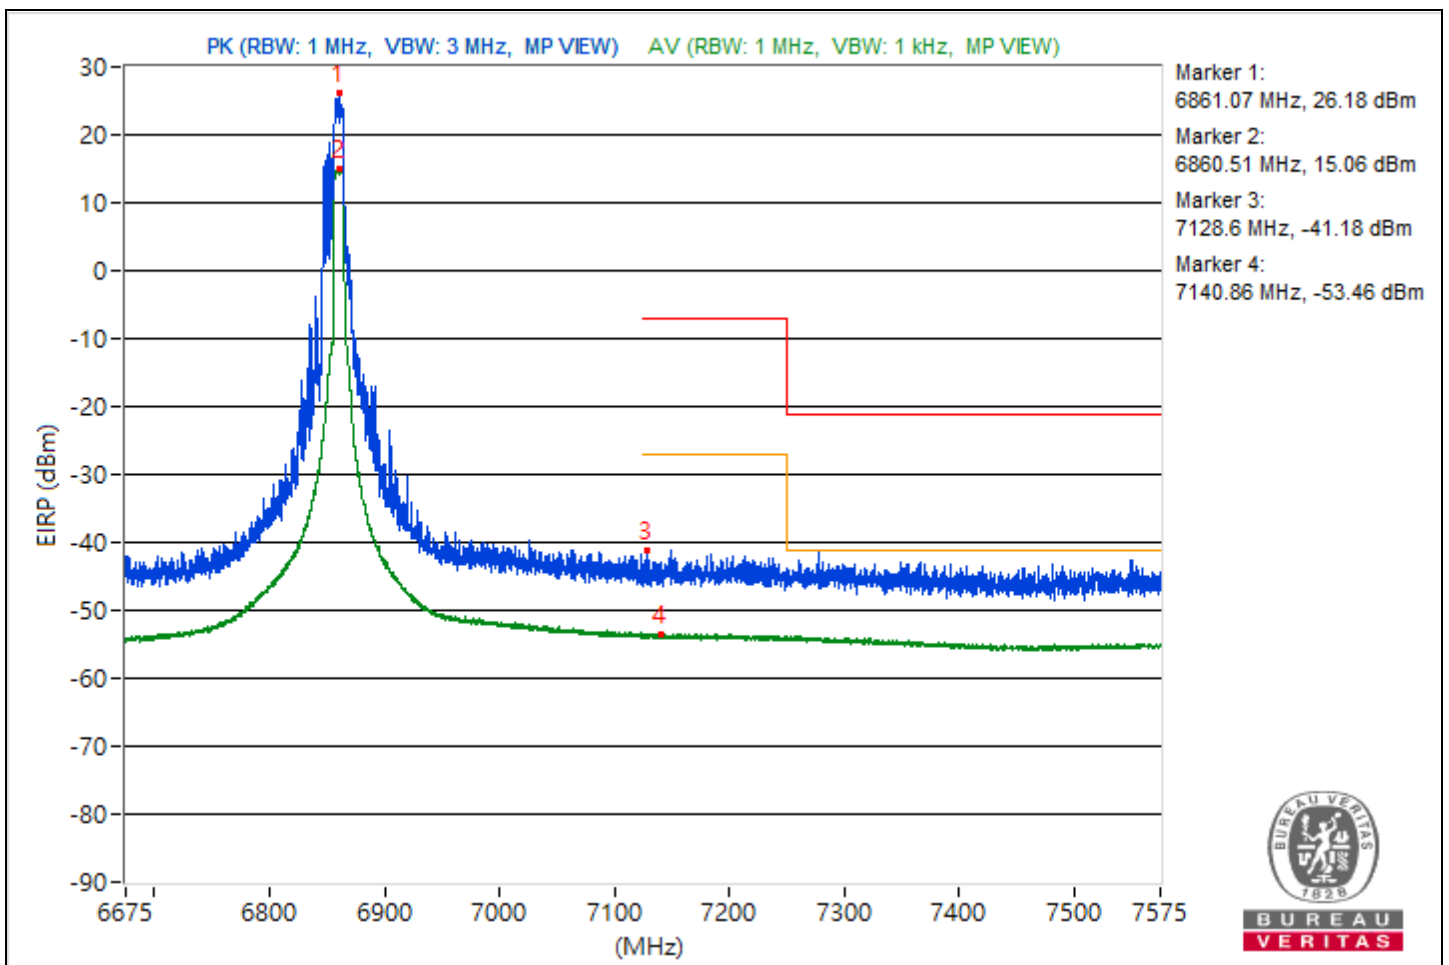


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.07	120.35 PK			20.33	4.76	25.09
2	*5950.32	109.34 AV			9.32	4.76	14.08
3	#5923.85	67.71 PK	88.26	-20.55	-32.31	4.76	-27.55
4	#5924.73	54.55 AV	68.26	-13.71	-45.47	4.76	-40.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

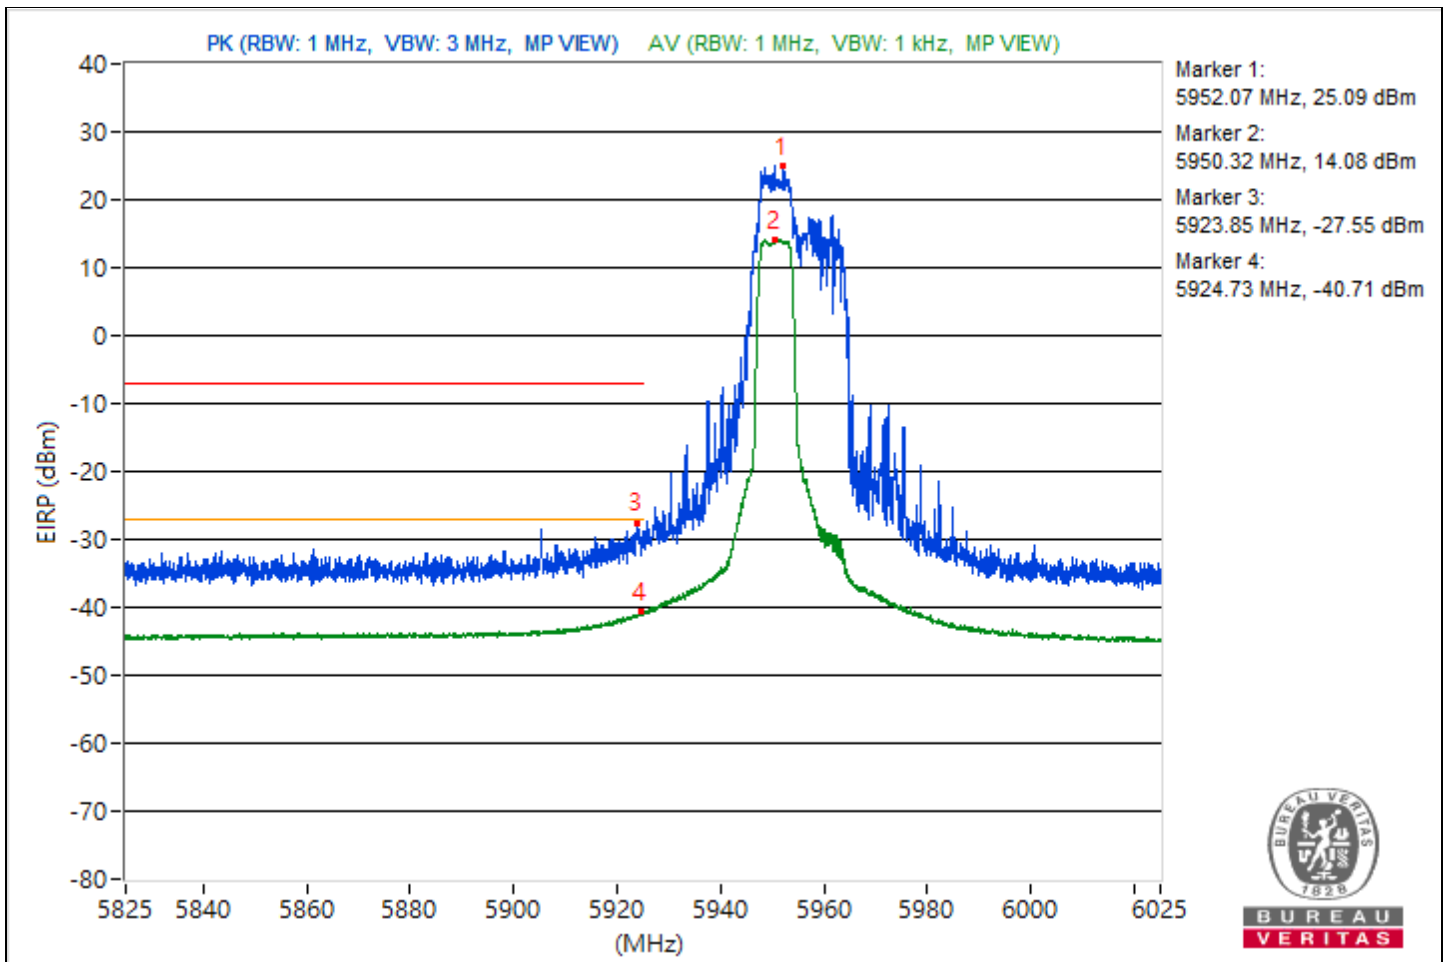


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6860.4	119.98 PK			20.11	4.61	24.72
2	*6861.3	109.79 AV			9.92	4.61	14.53
3	#7151.66	53.63 PK	88.26	-34.63	-46.24	4.61	-41.63
4	#7127.02	41.76 AV	68.26	-26.5	-58.11	4.61	-53.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

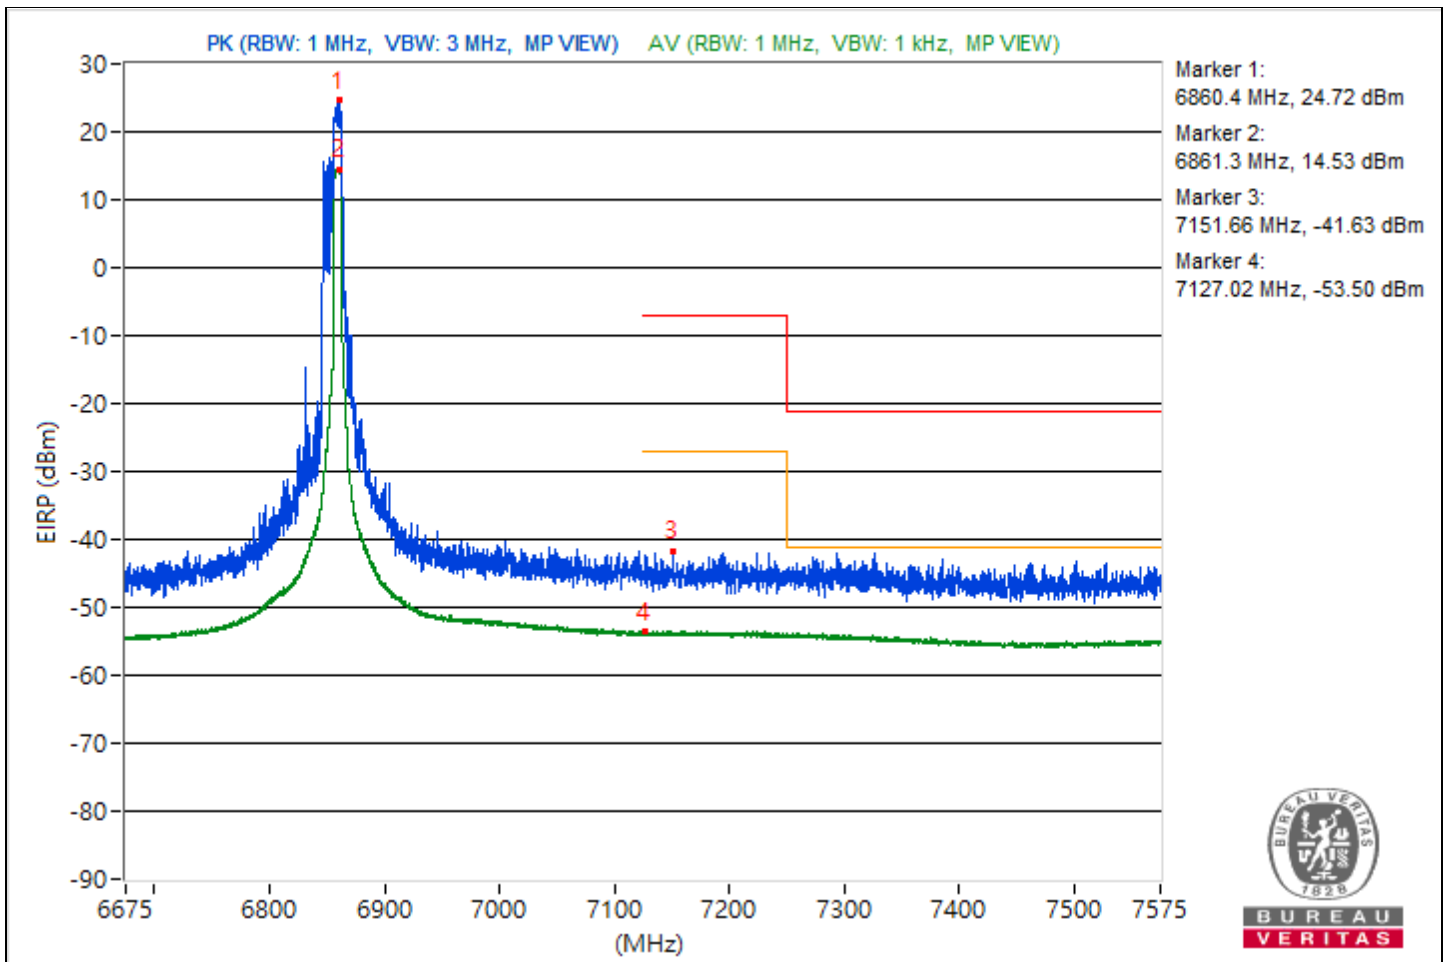


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.95	119.41 PK			19.39	4.76	24.15
2	*5953.8	109.67 AV			9.65	4.76	14.41
3	#5924.3	69.9 PK	88.26	-18.36	-30.12	4.76	-25.36
4	#5923.87	56.97 AV	68.26	-11.29	-43.05	4.76	-38.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

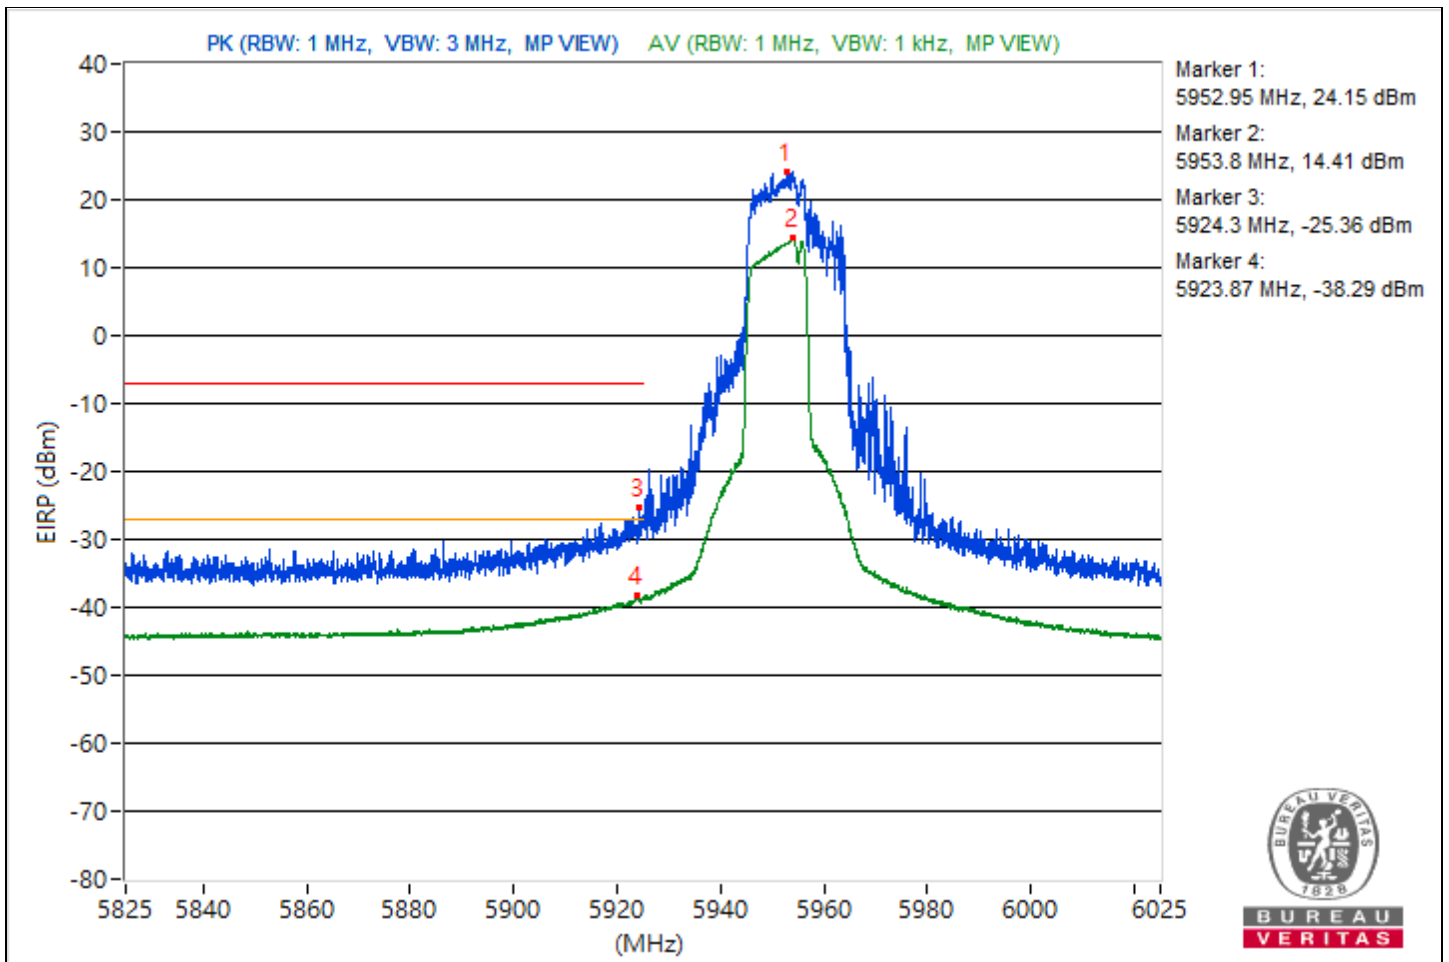


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6855.79	119.48 PK			19.61	4.61	24.22
2	*6856.35	109.87 AV			10	4.61	14.61
3	#7140.3	53.13 PK	88.26	-35.13	-46.74	4.61	-42.13
4	#7153.24	41.71 AV	68.26	-26.55	-58.16	4.61	-53.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

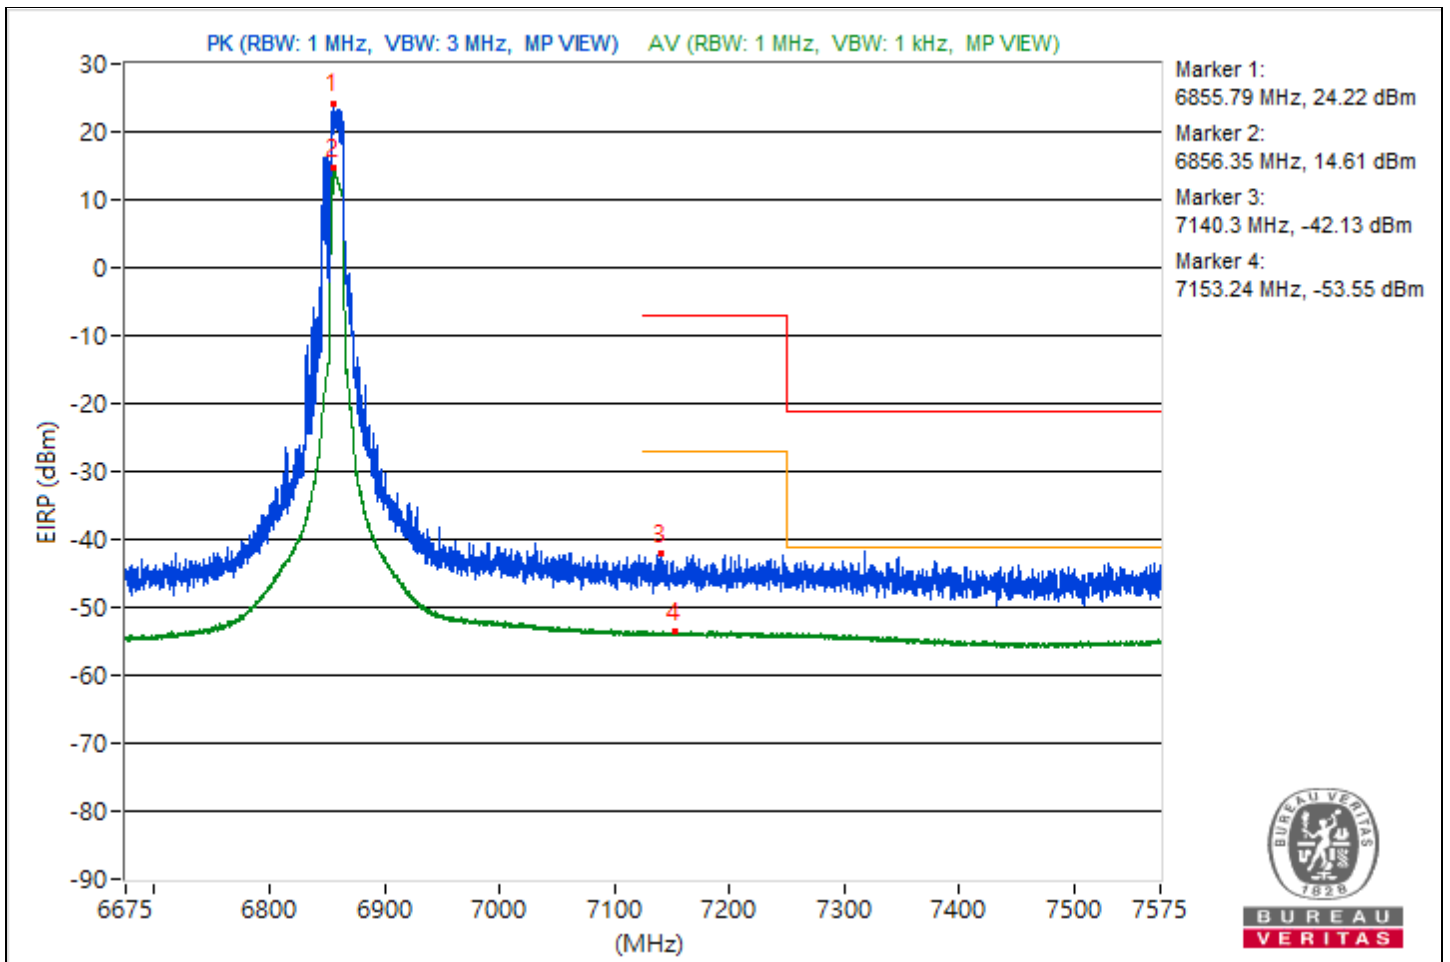


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5978.6	111.43 PK			11.41	4.76	16.17
2	*5986.85	100.61 AV			0.59	4.76	5.35
3	#5922.37	82.07 PK	88.26	-6.19	-17.95	4.76	-13.19
4	#5924.5	64.27 AV	68.26	-3.99	-35.75	4.76	-30.99

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # " : The radiated frequency is out of the restricted band.

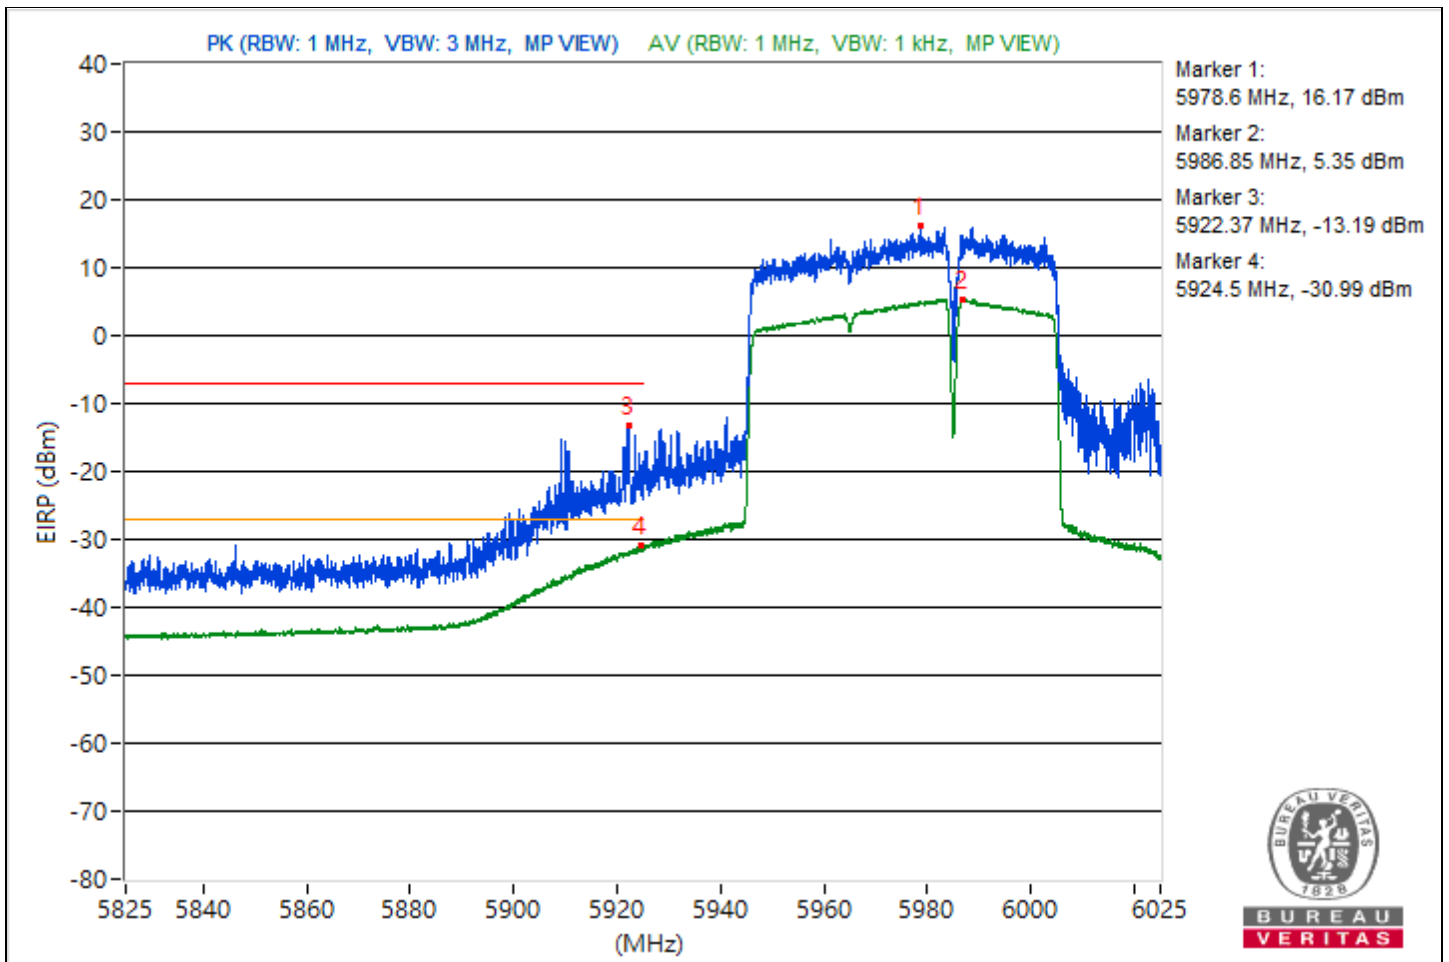


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6787.27	113.97 PK			14.1	4.61	18.71
2	*6783	103.77 AV			3.9	4.61	8.51
3	#7203.86	53.12 PK	88.26	-35.14	-46.75	4.61	-42.14
4	#7129.95	41.97 AV	68.26	-26.29	-57.9	4.61	-53.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

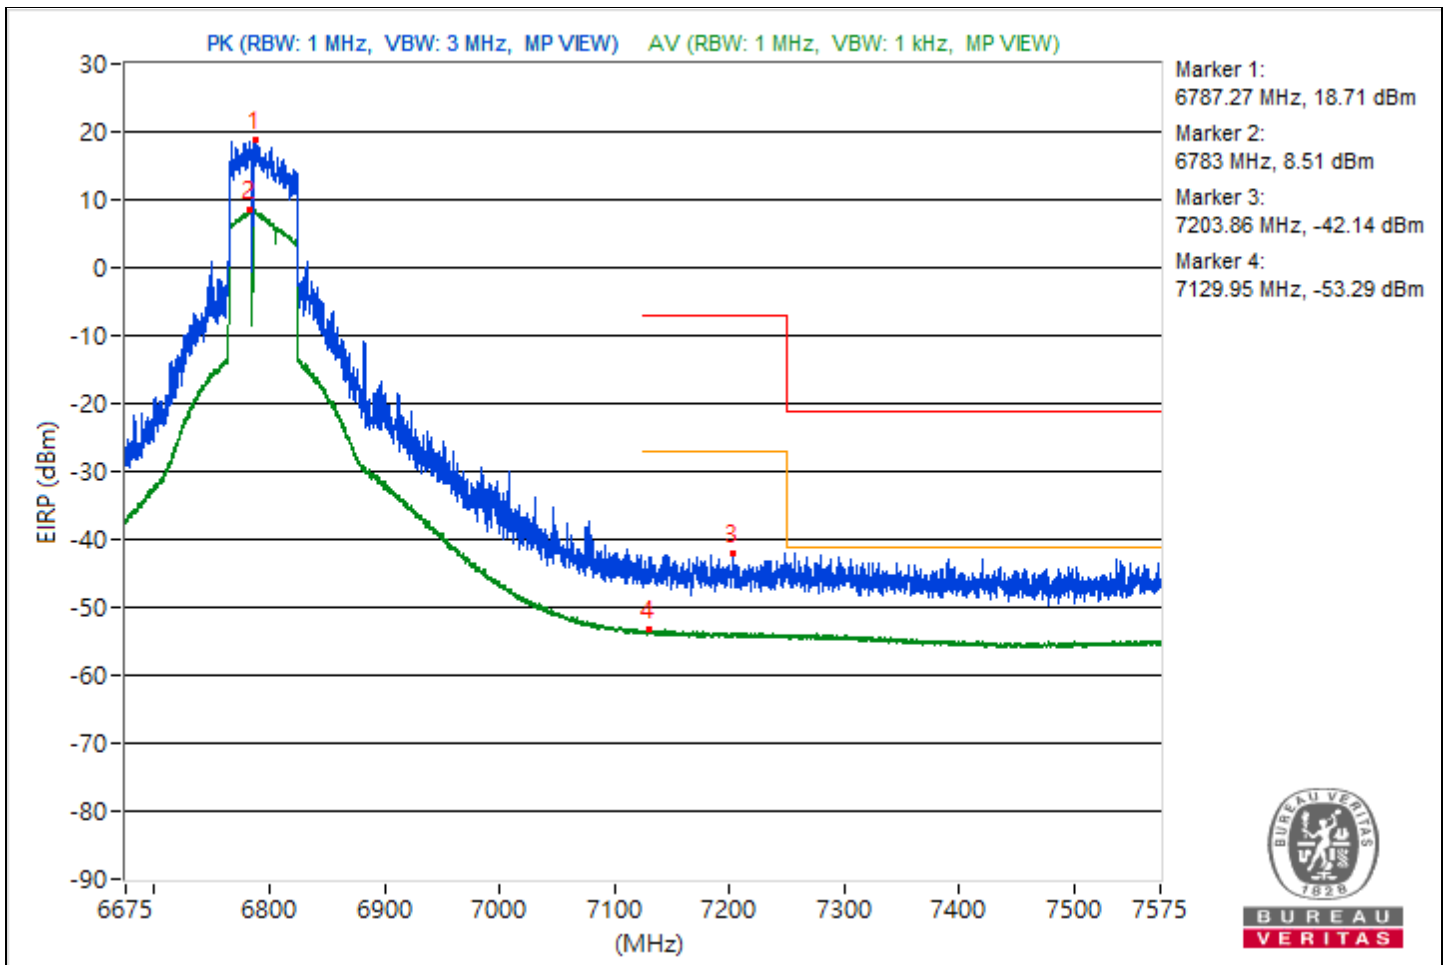


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6023.6	107.56 PK			7.54	4.76	12.3
2	*6022.32	97.58 AV			-2.44	4.76	2.32
3	#5924.55	79 PK	88.26	-9.26	-21.02	4.76	-16.26
4	#5921.62	65.2 AV	68.26	-3.06	-34.82	4.76	-30.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

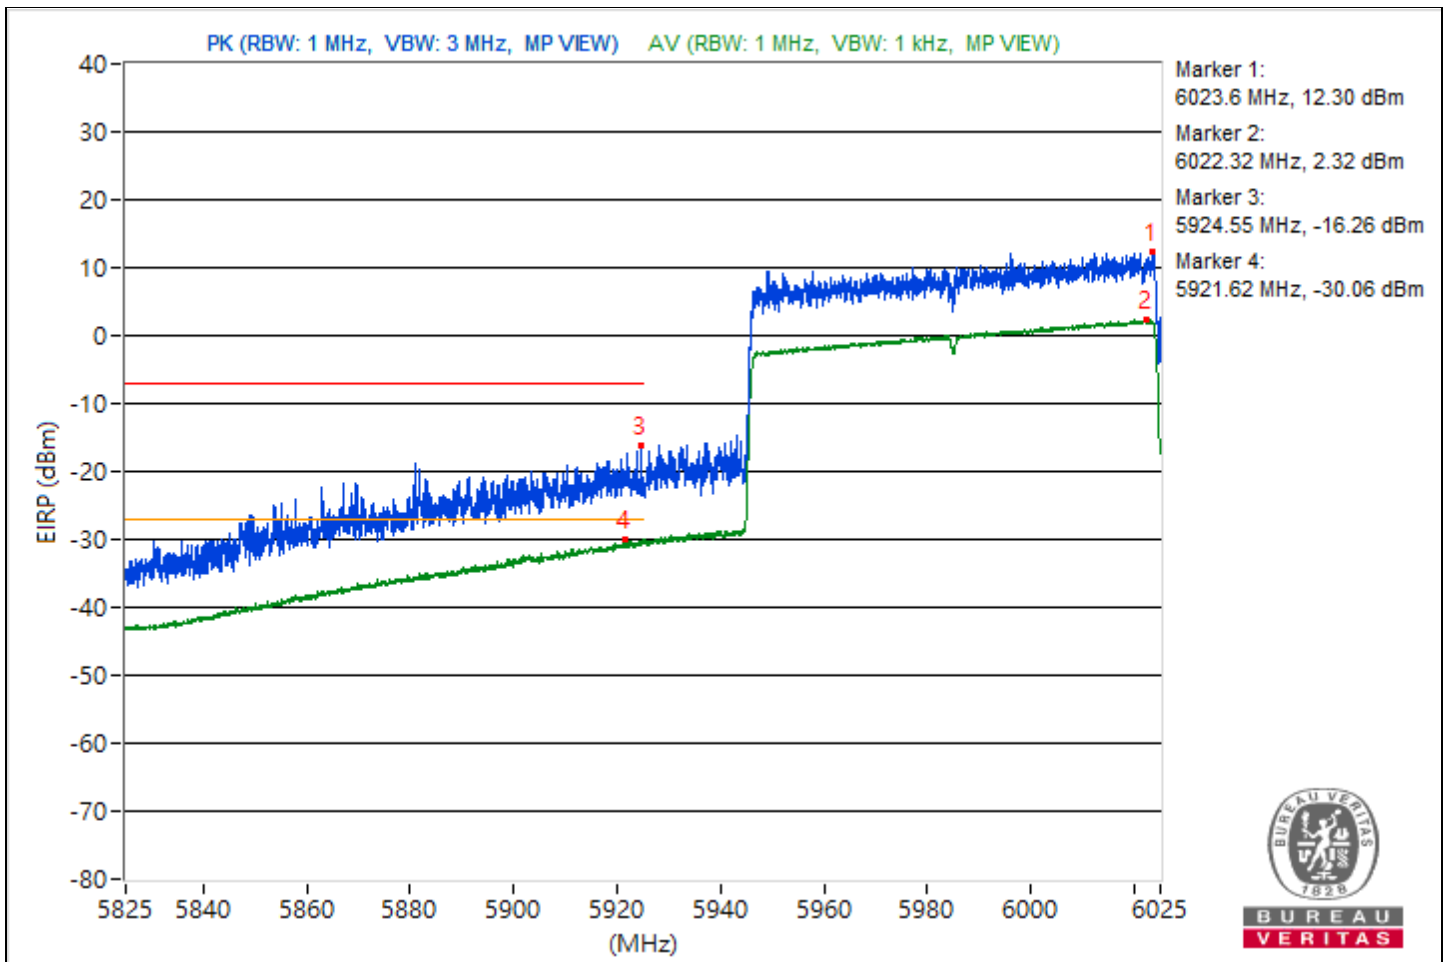


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6702.9	108.23 PK			8.36	4.61	12.97
2	*6675.45	96.66 AV			-3.21	4.61	1.4
3	#7186.43	53.43 PK	88.26	-34.83	-46.44	4.61	-41.83
4	#7220.51	41.42 AV	68.26	-26.84	-58.45	4.61	-53.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

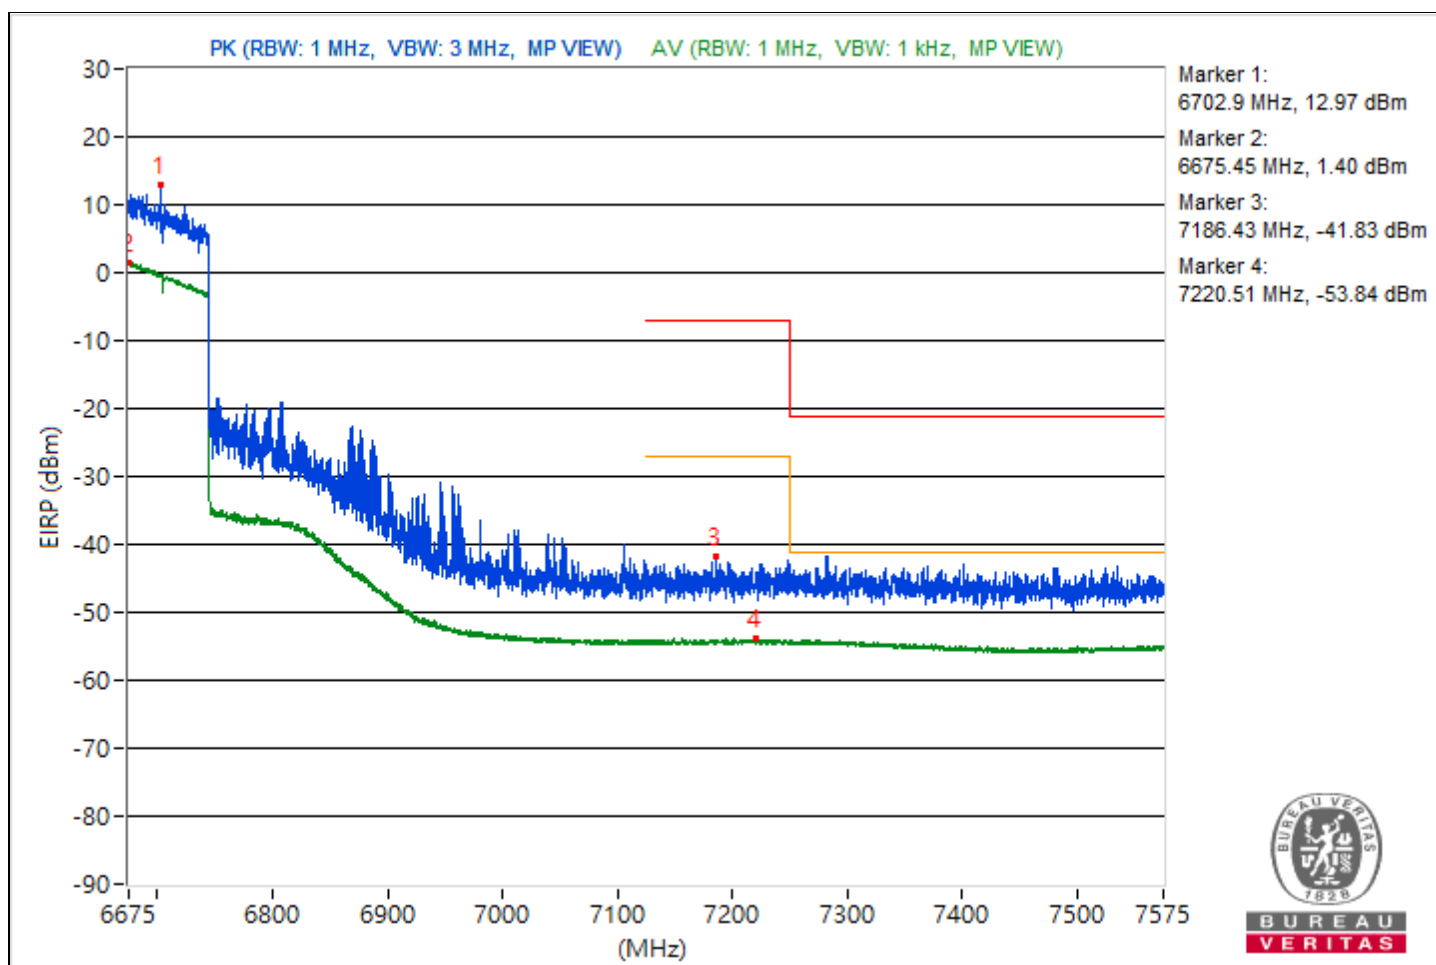


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6015.68	108.77 PK			8.75	4.76	13.51
2	*6022.52	96.95 AV			-3.07	4.76	1.69
3	#5912.07	79.81 PK	88.26	-8.45	-20.21	4.76	-15.45
4	#5923.5	65.62 AV	68.26	-2.64	-34.4	4.76	-29.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

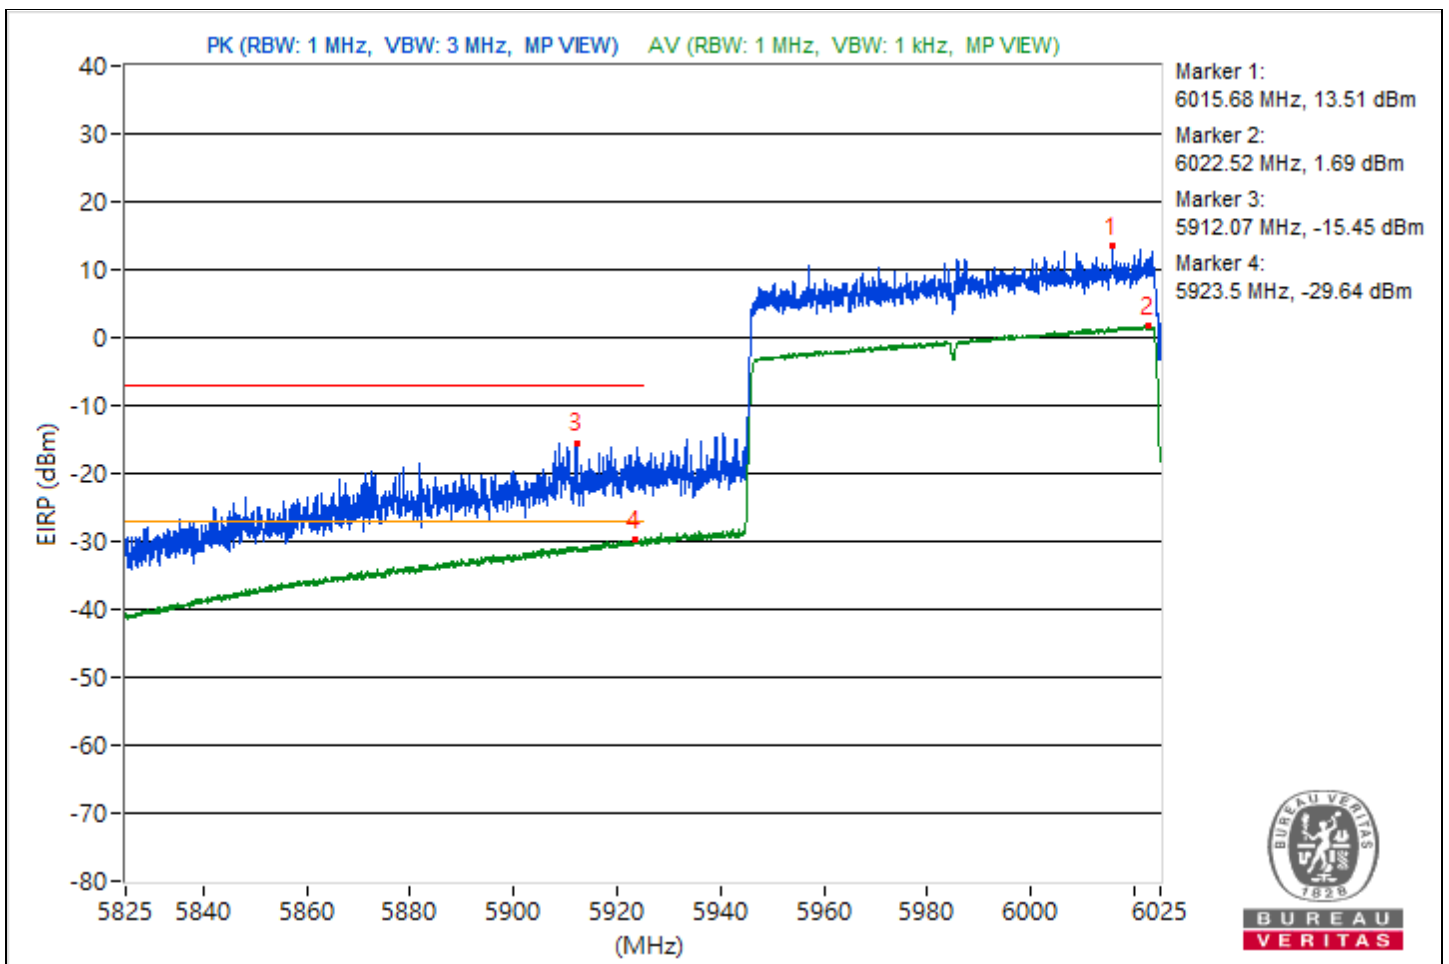


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6683.89	108.28 PK			8.41	4.61	13.02
2	*6675.9	96.43 AV			-3.44	4.61	1.17
3	#7151.66	53.44 PK	88.26	-34.82	-46.43	4.61	-41.82
4	#7127.02	41.57 AV	68.26	-26.69	-58.3	4.61	-53.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

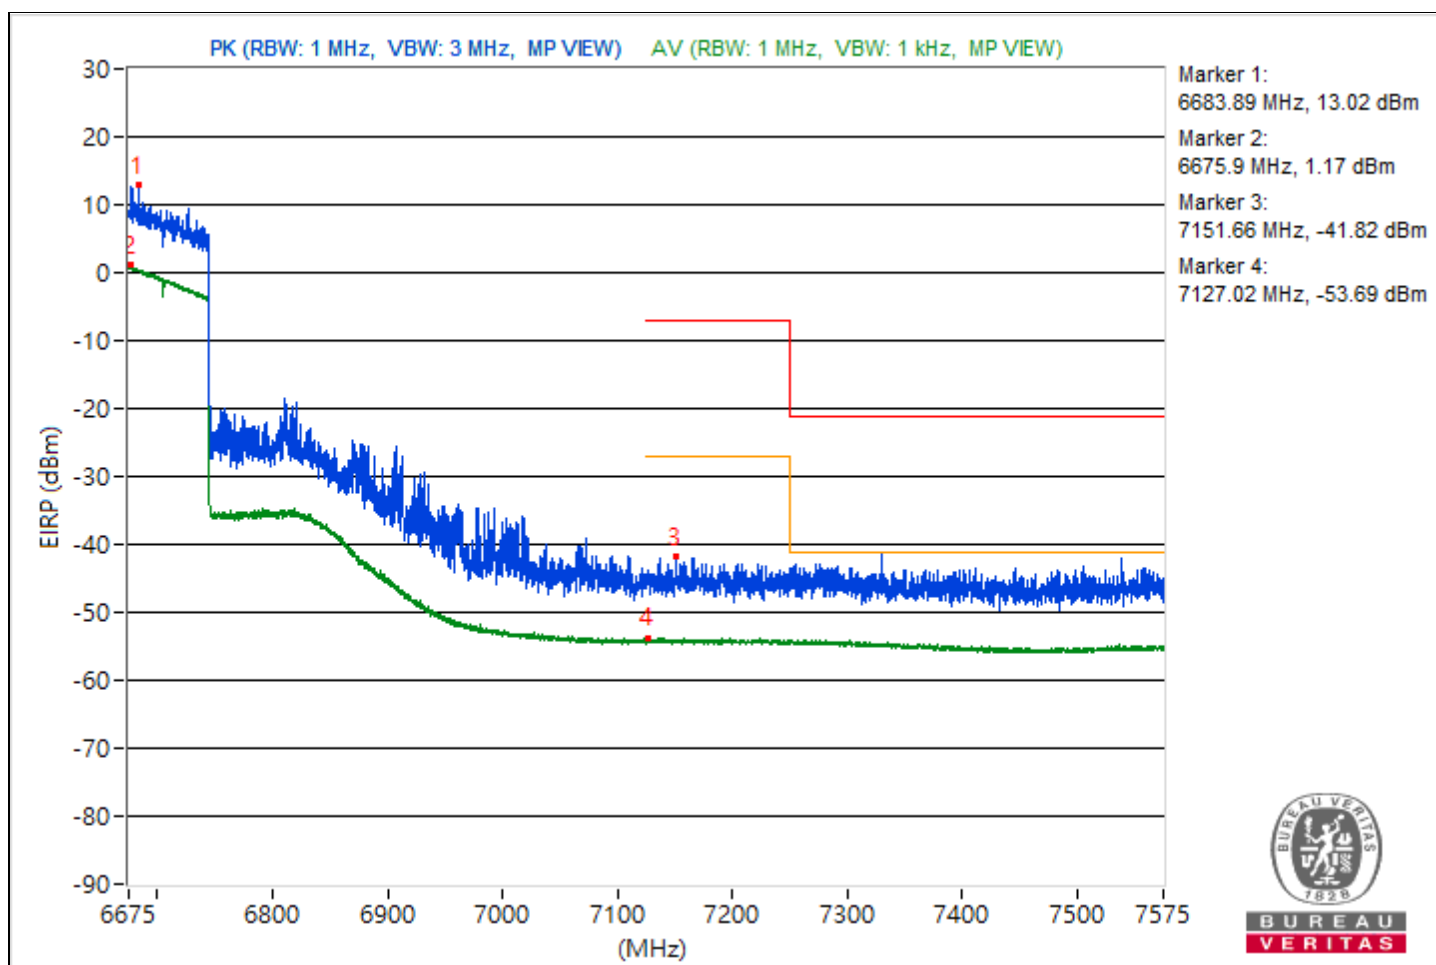


For 2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.99	58.88 PK	74	-15.12	-49.75	-45.78	7.93	-36.38
2	3832.43	48.74 AV	54	-5.26	-57.09	-57.87	7.93	-46.52
3	15561.69	58.12 PK	74	-15.88	-50.14	-46.69	7.93	-37.14
4	14490.76	47.52 AV	54	-6.48	-58.11	-59.33	7.93	-47.74
5	21251.1	60.26 PK	74	-13.74	-43.98	-49.63	7.93	-35
6	21179.7	49.81 AV	54	-4.19	-56.69	-56.11	7.93	-45.45
7	22456.6	61.75 PK	74	-12.25	-48.41	-42.42	7.93	-33.51
8	23652.4	51 AV	54	-3	-54.95	-55.47	7.93	-44.26
9	38911.47	53.85 PK	74	-20.15	-57.19	-50.11	7.93	-41.41
10	38796.53	44.22 AV	54	-9.78	-62.48	-61.54	7.93	-51.04

Note: Margin value = Emission Level - Limit value

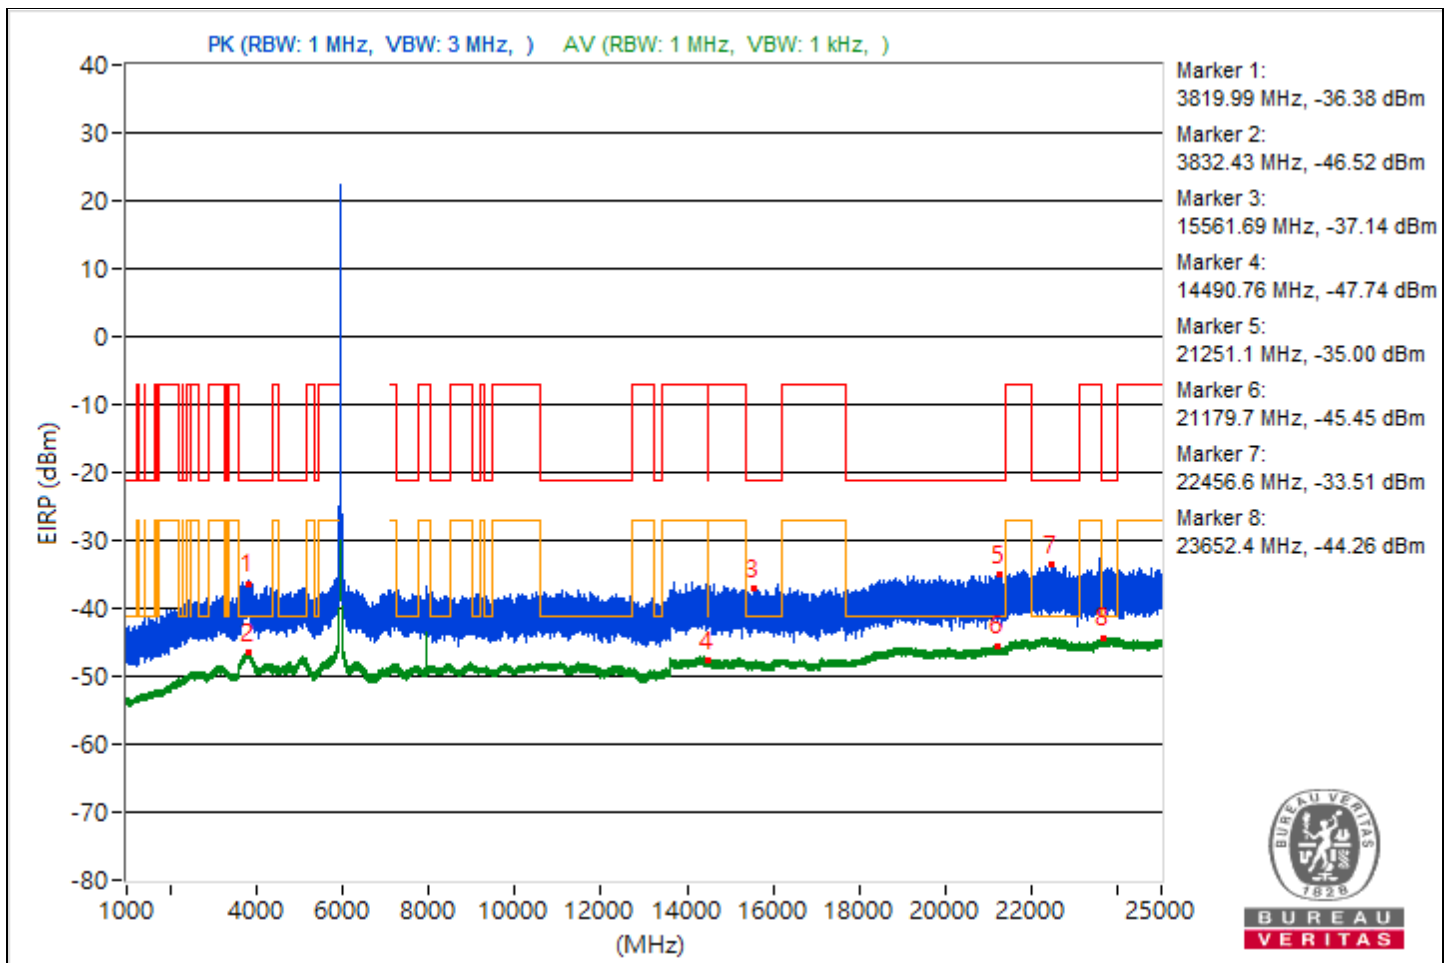

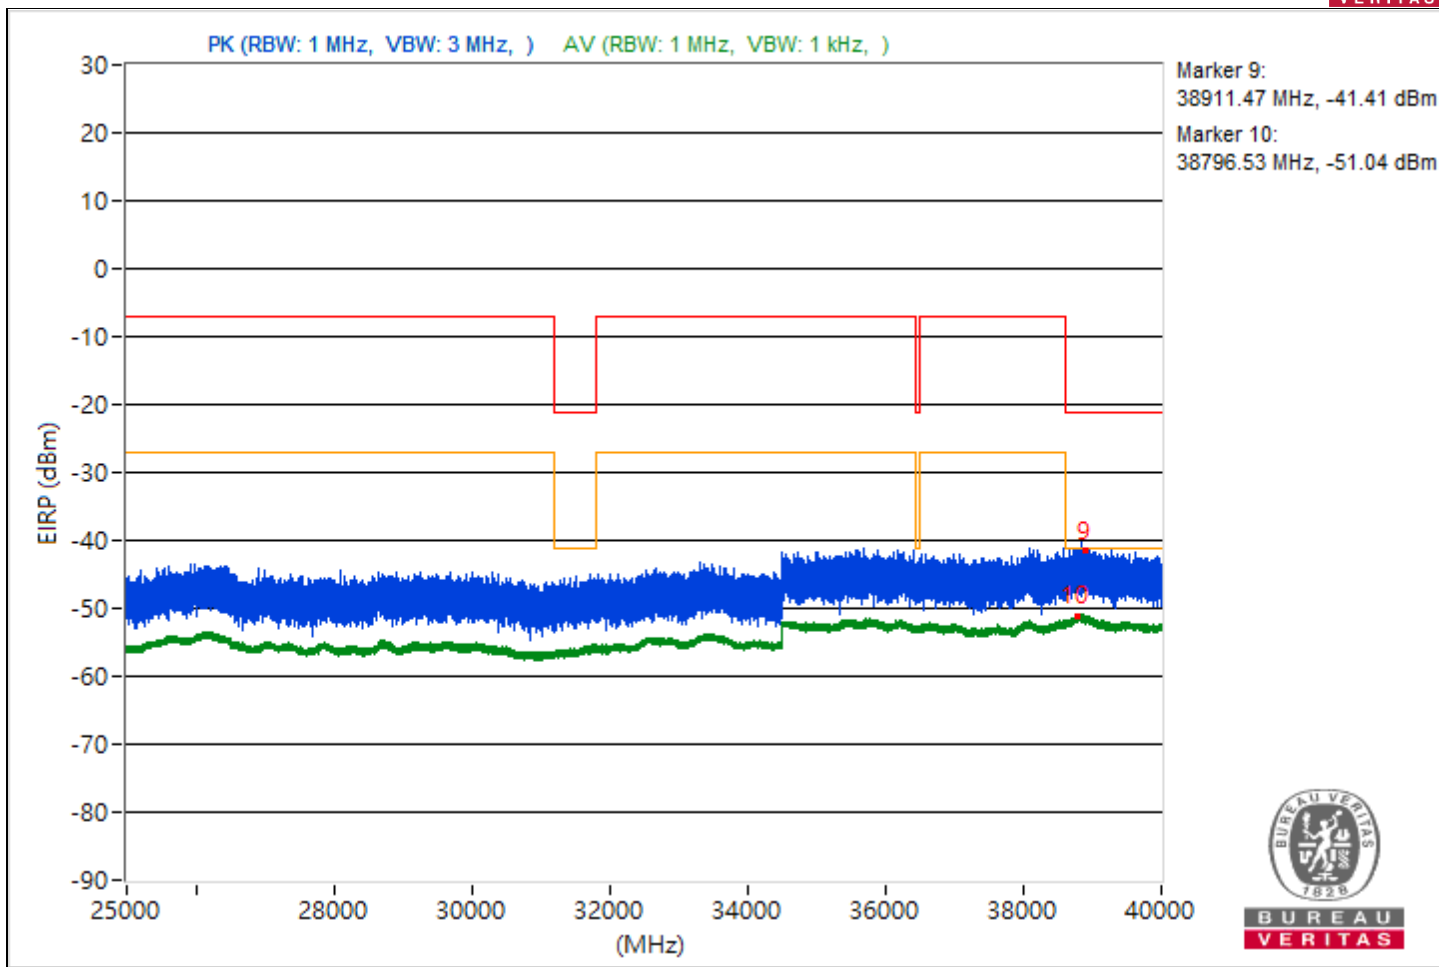





RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.88	59.57 PK	74	-14.43	-45.6	-47.99	7.93	-35.69
2	3801.32	48.62 AV	54	-5.38	-57.3	-57.87	7.93	-46.64
3	15617.87	58.21 PK	74	-15.79	-53	-45.72	7.93	-37.05
4	8233.33	49.58 AV	54	-4.42	-56.96	-56.3	7.93	-45.68
5	20513.6	60.68 PK	74	-13.32	-44.43	-46.98	7.93	-34.58
6	21153	49.65 AV	54	-4.35	-56.95	-56.18	7.93	-45.61
7	23887.7	61.09 PK	74	-12.91	-49.27	-43.03	7.93	-34.17
8	22254.1	50.81 AV	54	-3.19	-55.82	-54.99	7.93	-44.45
9	38870.04	55.13 PK	74	-18.87	-54.85	-49.09	7.93	-40.13
10	38827.73	44.32 AV	54	-9.68	-61.47	-62.34	7.93	-50.94

Note: Margin value = Emission Level - Limit value

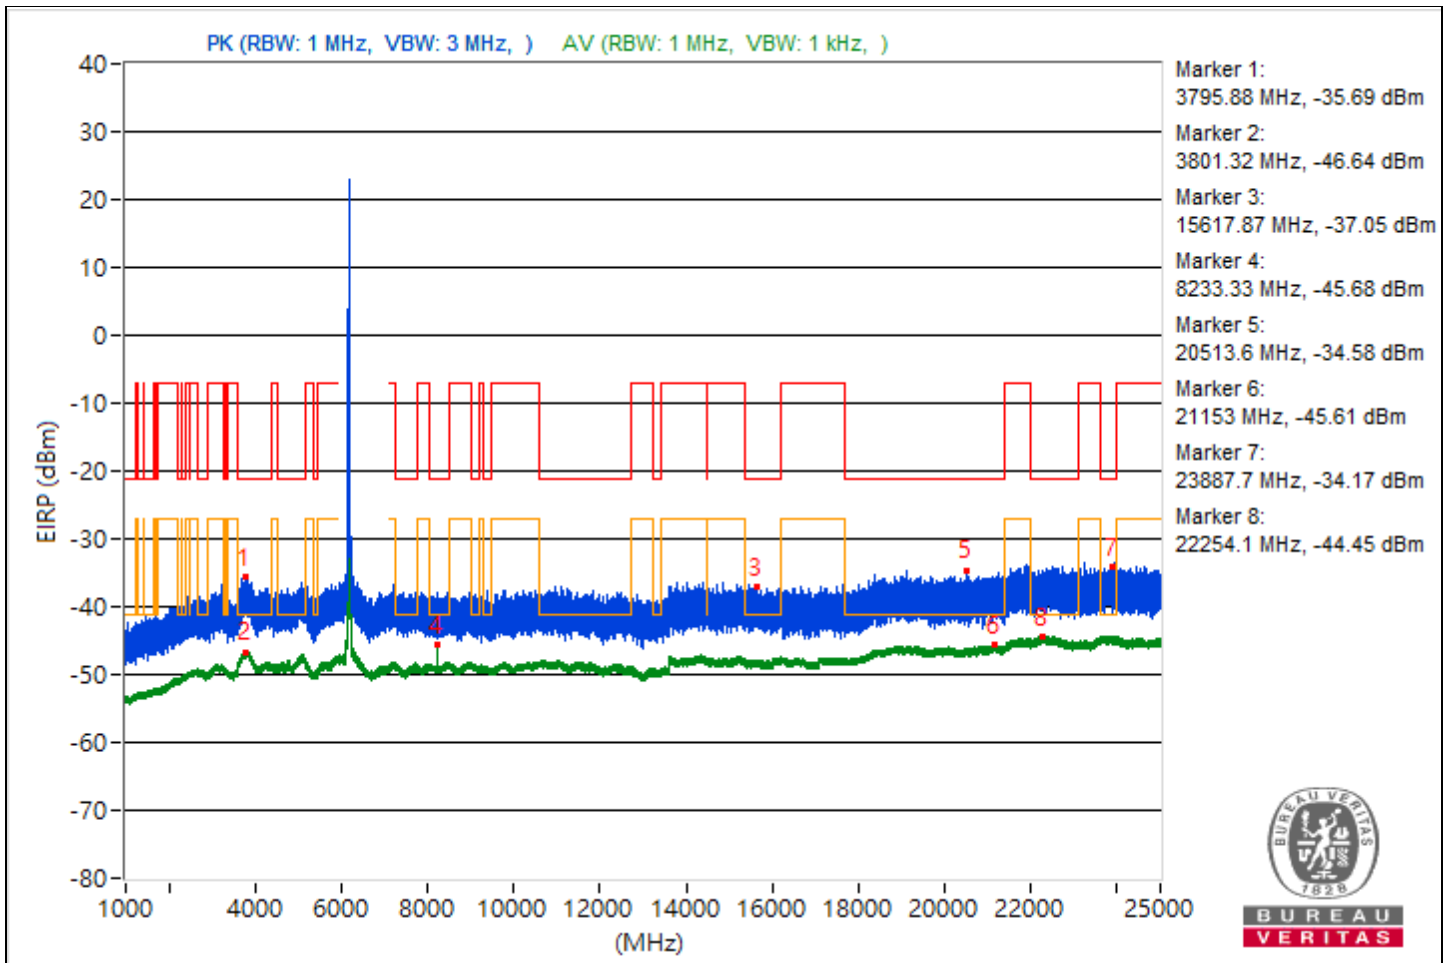

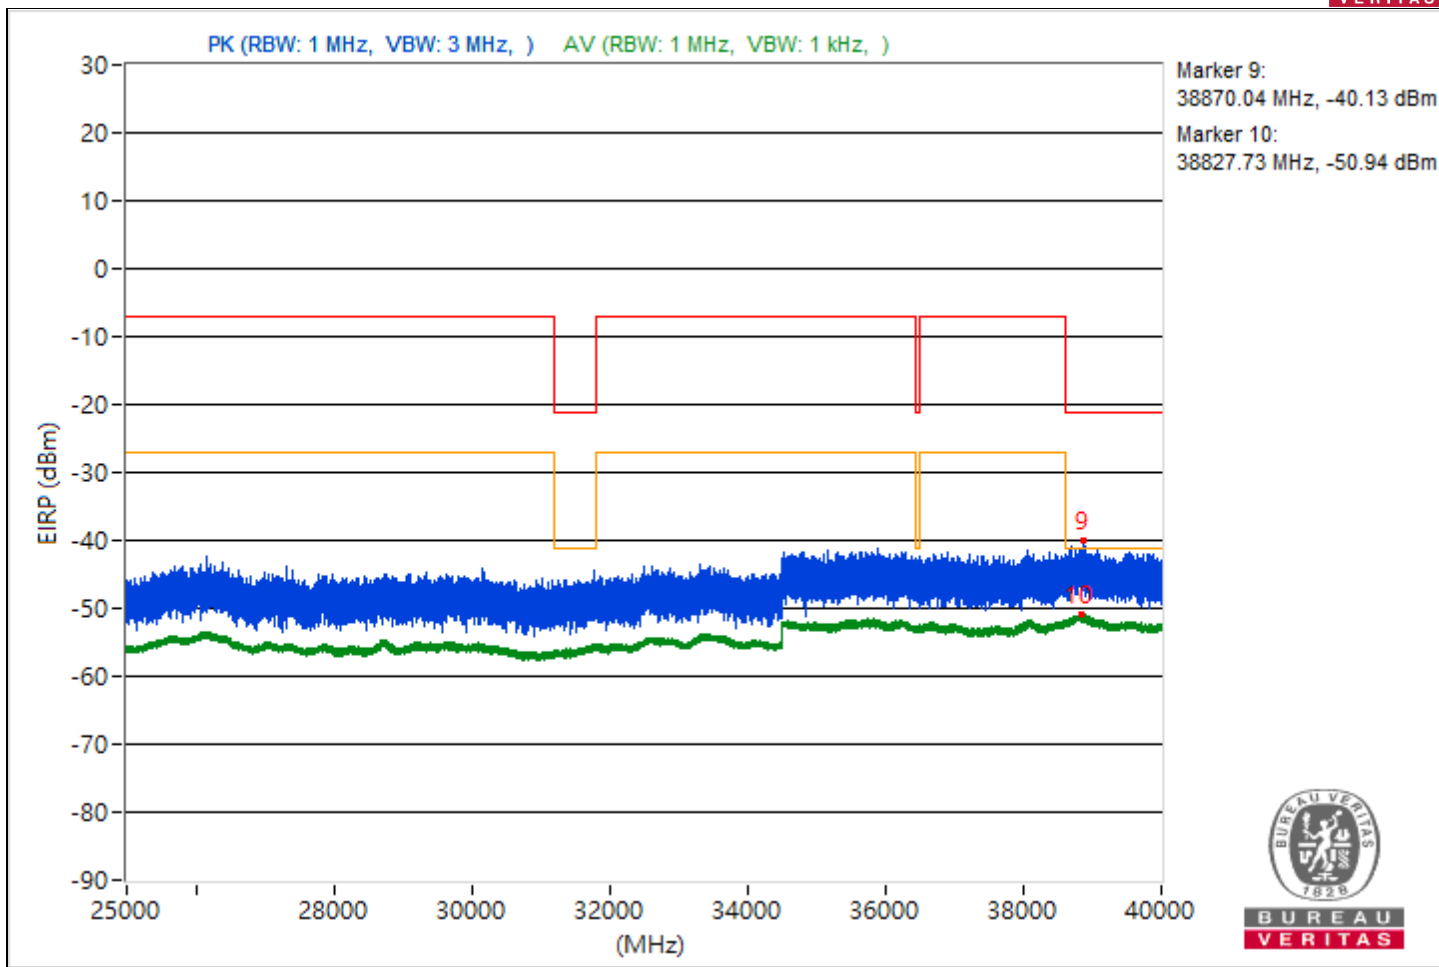





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786	59.35 PK	74	-14.65	-44.74	-51.1	7.93	-35.91
2	3829.94	48.75 AV	54	-5.25	-57.63	-57.28	7.93	-46.51
3	15353.16	58.28 PK	74	-15.72	-46.45	-50.15	7.93	-36.98
4	14482.31	47.65 AV	54	-6.35	-58.88	-58.23	7.93	-47.61
5	20078.4	60.2 PK	74	-13.8	-47.87	-44.7	7.93	-35.06
6	21367.5	49.51 AV	54	-4.49	-56.43	-56.96	7.93	-45.75
7	23703.6	61.6 PK	74	-12.4	-47.51	-42.87	7.93	-33.66
8	22355.2	50.81 AV	54	-3.19	-55.92	-54.92	7.93	-44.45
9	39667.47	54.96 PK	74	-19.04	-56.47	-48.94	7.93	-40.3
10	38811.56	44.27 AV	54	-9.73	-62.44	-61.46	7.93	-50.99

Note: Margin value = Emission Level - Limit value

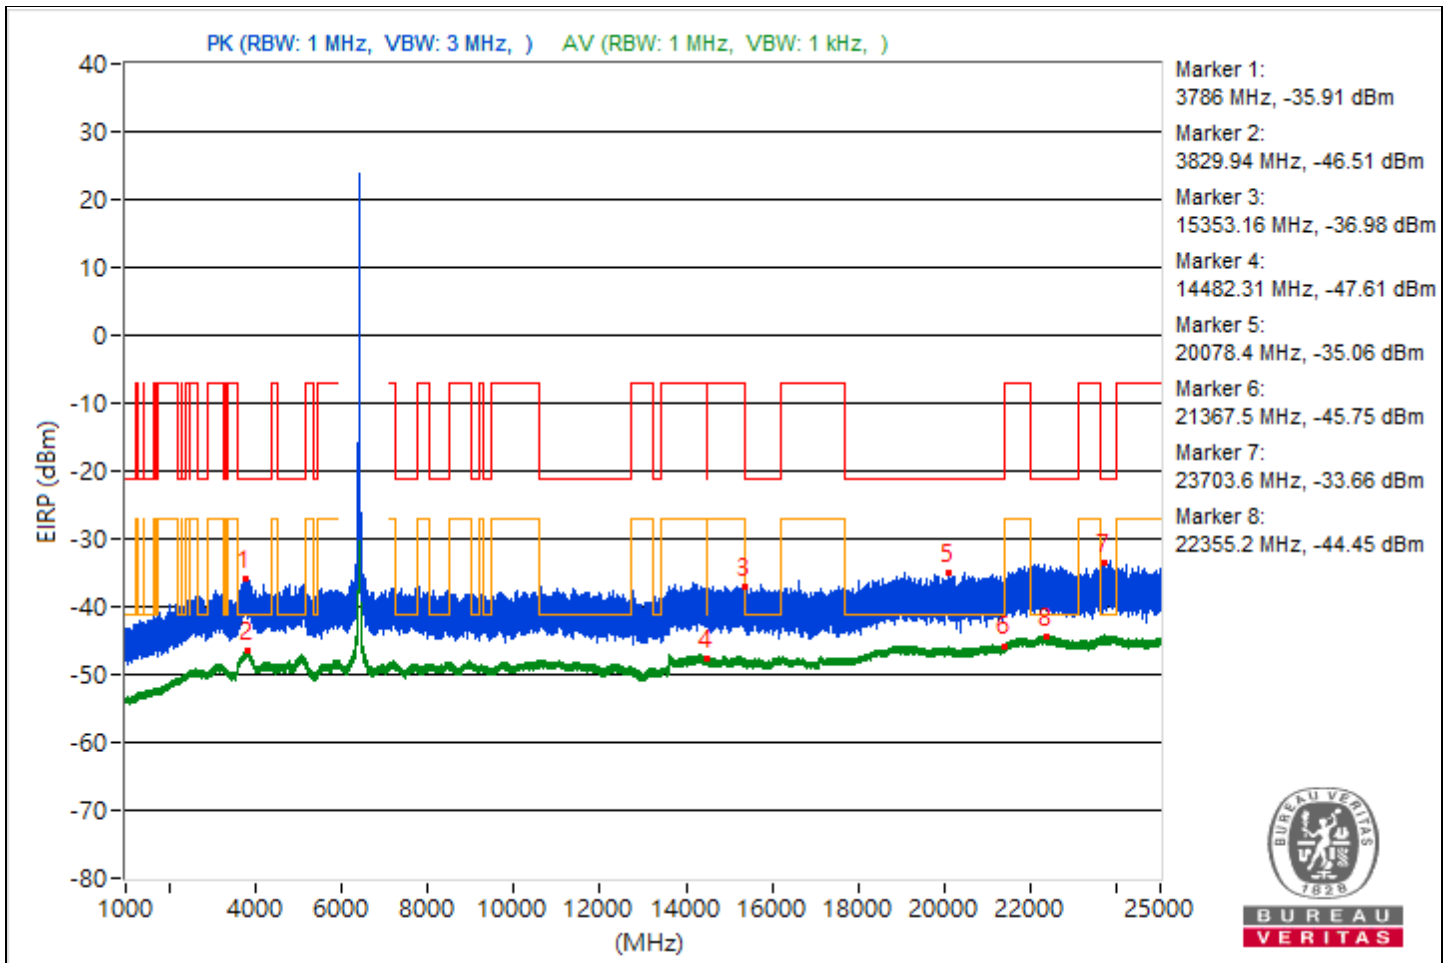

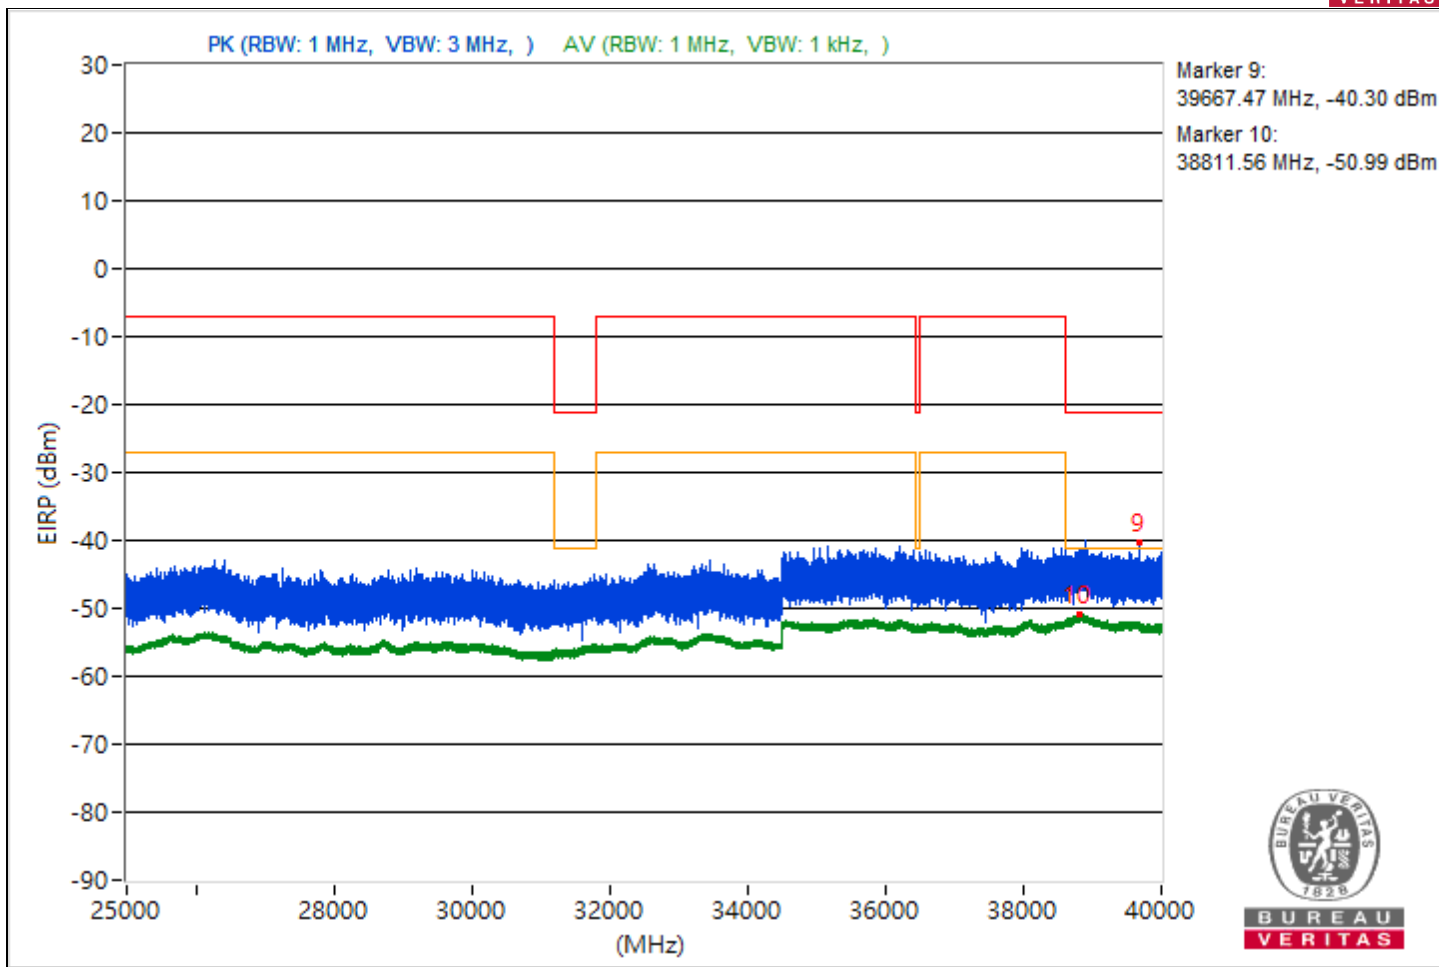





RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.19	58.87 PK	74	-15.13	-45.84	-49.6	7.93	-36.39
2	3812.44	48.56 AV	54	-5.44	-57.24	-58.08	7.93	-46.7
3	15375.56	59.04 PK	74	-14.96	-46.51	-47.93	7.93	-36.22
4	14475.47	47.94 AV	54	-6.06	-58.1	-58.43	7.93	-47.32
5	20477.7	60.15 PK	74	-13.85	-44.19	-49.38	7.93	-35.11
6	21165	49.72 AV	54	-4.28	-56.95	-56.06	7.93	-45.54
7	23755.3	61.78 PK	74	-12.22	-47.99	-42.49	7.93	-33.48
8	22281.3	50.74 AV	54	-3.26	-55.89	-55.07	7.93	-44.52
9	38814.4	55.54 PK	74	-18.46	-52.98	-49.16	7.93	-39.72
10	38845.16	44.47 AV	54	-9.53	-61.48	-61.99	7.93	-50.79

Note: Margin value = Emission Level - Limit value

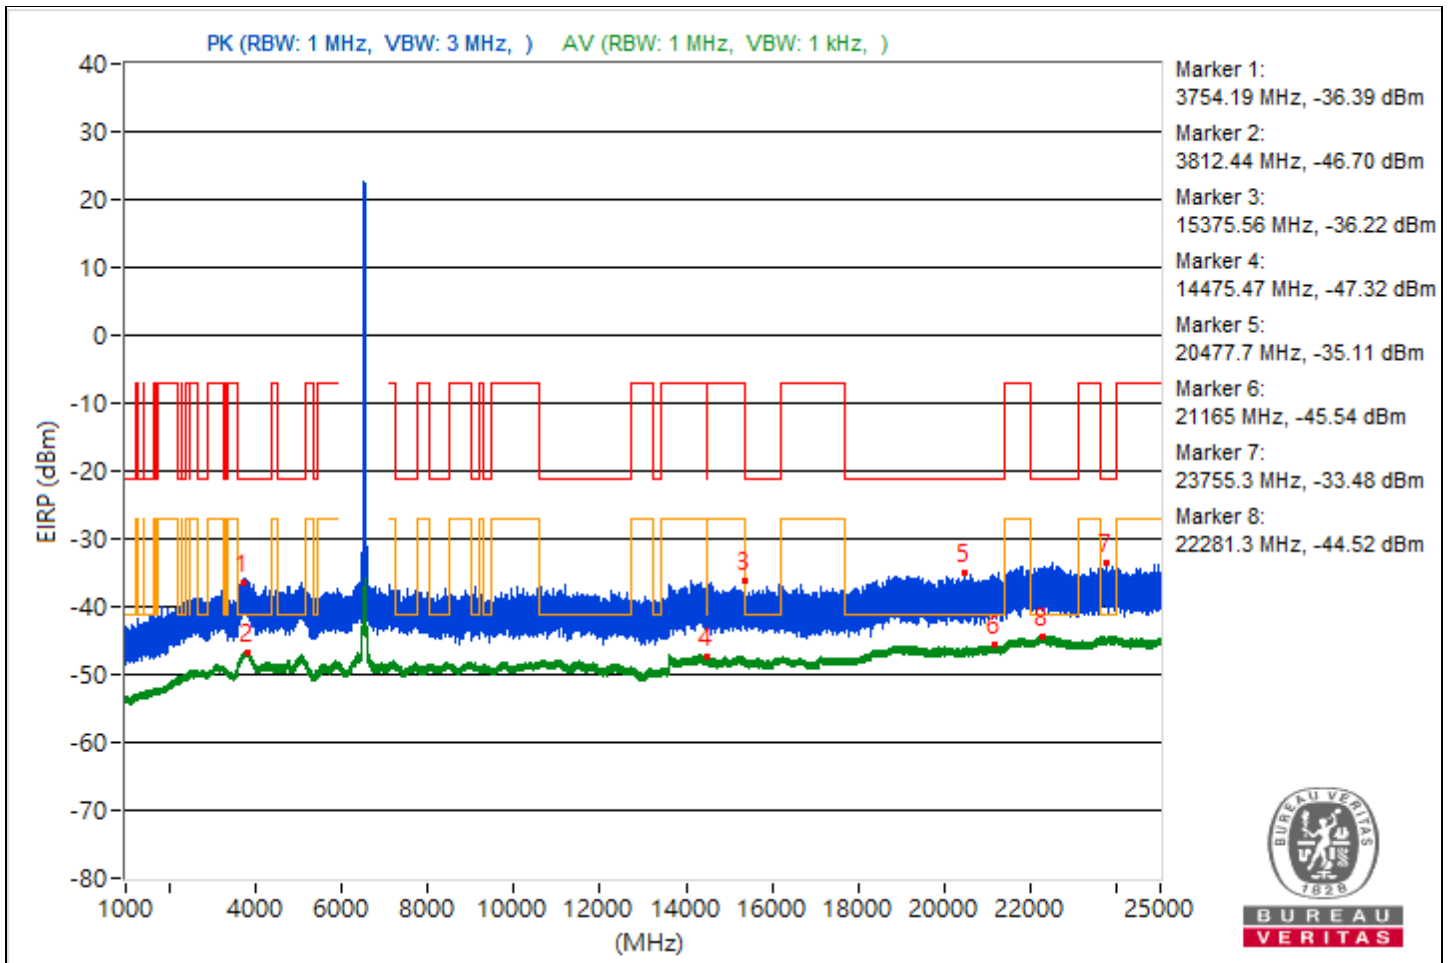

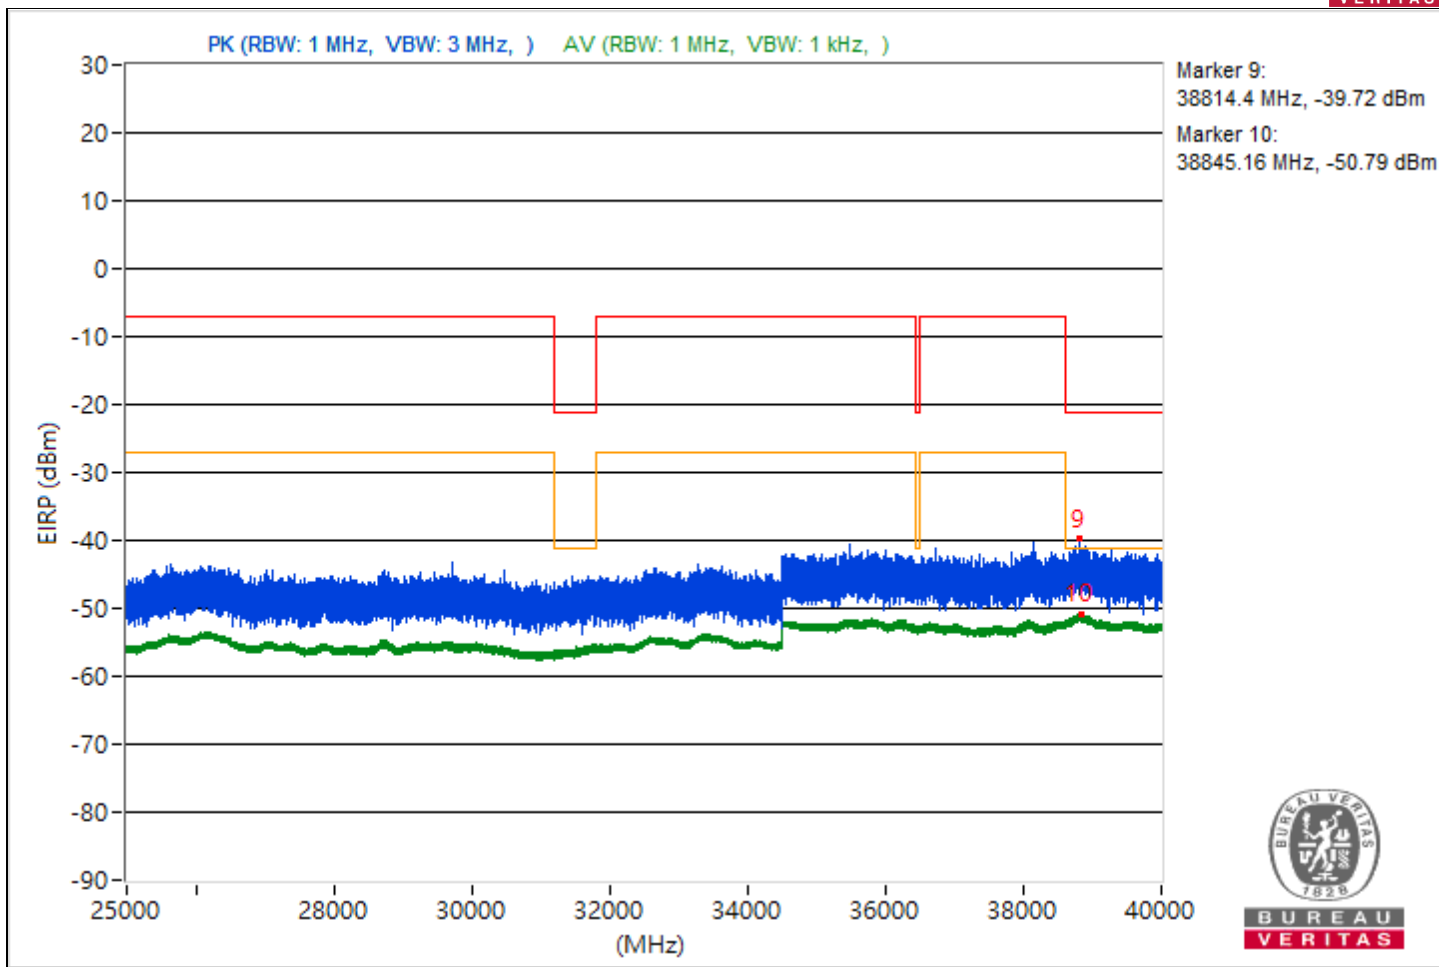





RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.16	58.92 PK	74	-15.08	-49.66	-45.75	7.93	-36.34
2	3821.47	48.74 AV	54	-5.26	-57.85	-57.1	7.93	-46.52
3	8485.96	57.8 PK	74	-16.2	-46.44	-52.07	7.93	-37.46
4	14497.07	47.7 AV	54	-6.3	-58.71	-58.31	7.93	-47.56
5	19108.8	60.32 PK	74	-13.68	-43.69	-50.5	7.93	-34.94
6	21131	49.56 AV	54	-4.44	-56.98	-56.32	7.93	-45.7
7	23945.6	61.25 PK	74	-12.75	-42.58	-50.55	7.93	-34.01
8	22225.3	50.93 AV	54	-3.07	-55.61	-54.95	7.93	-44.33
9	38772.98	53.51 PK	74	-20.49	-57.95	-50.38	7.93	-41.75
10	38844.71	44.22 AV	54	-9.78	-61.47	-62.55	7.93	-51.04

Note: Margin value = Emission Level - Limit value

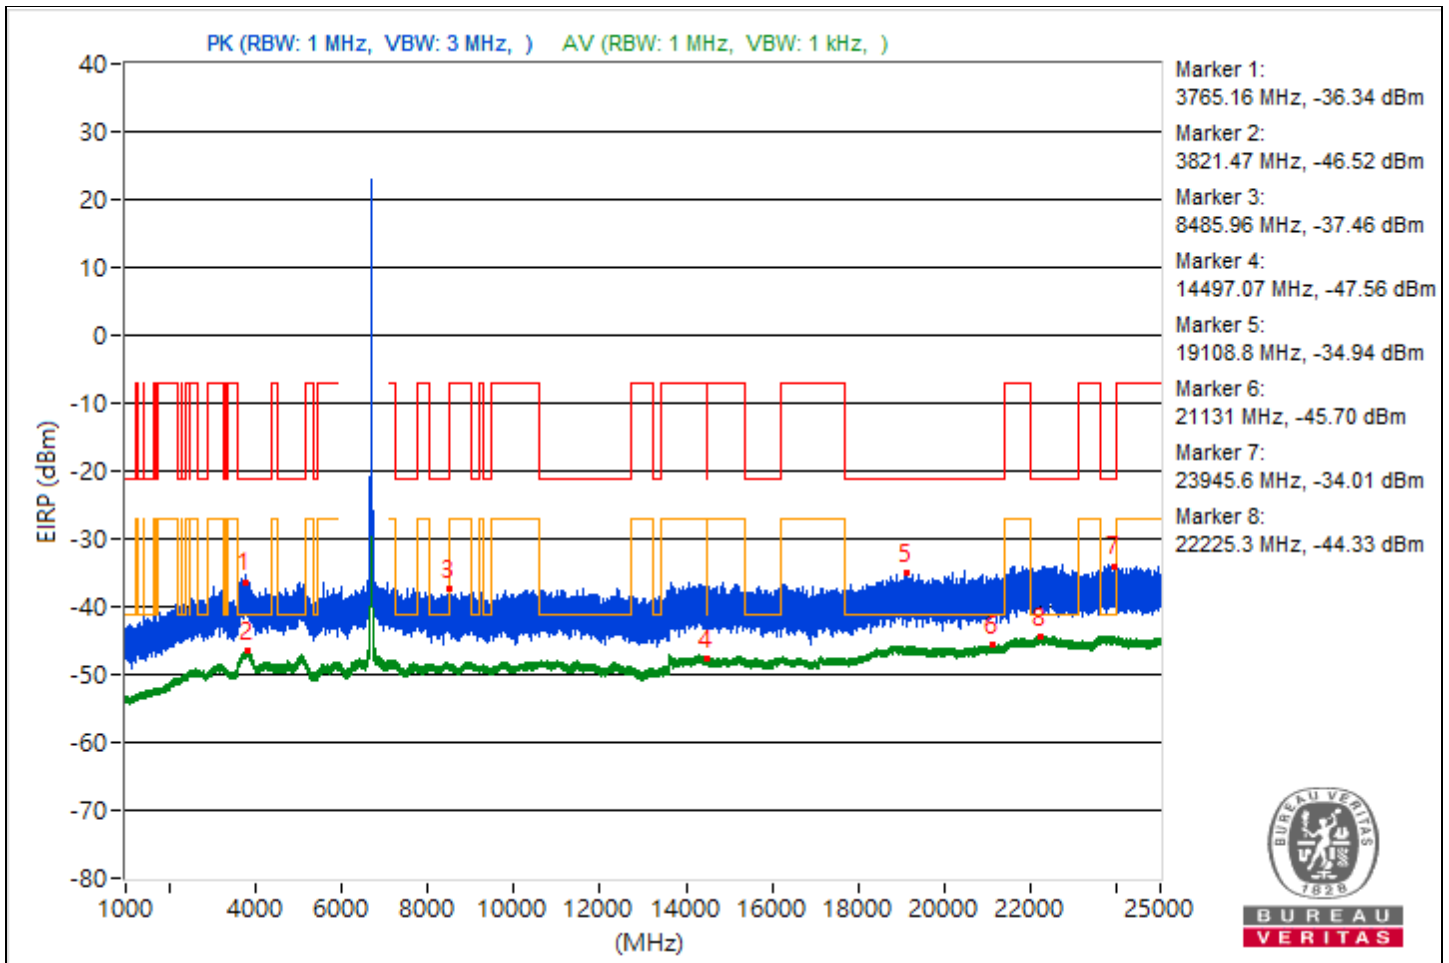

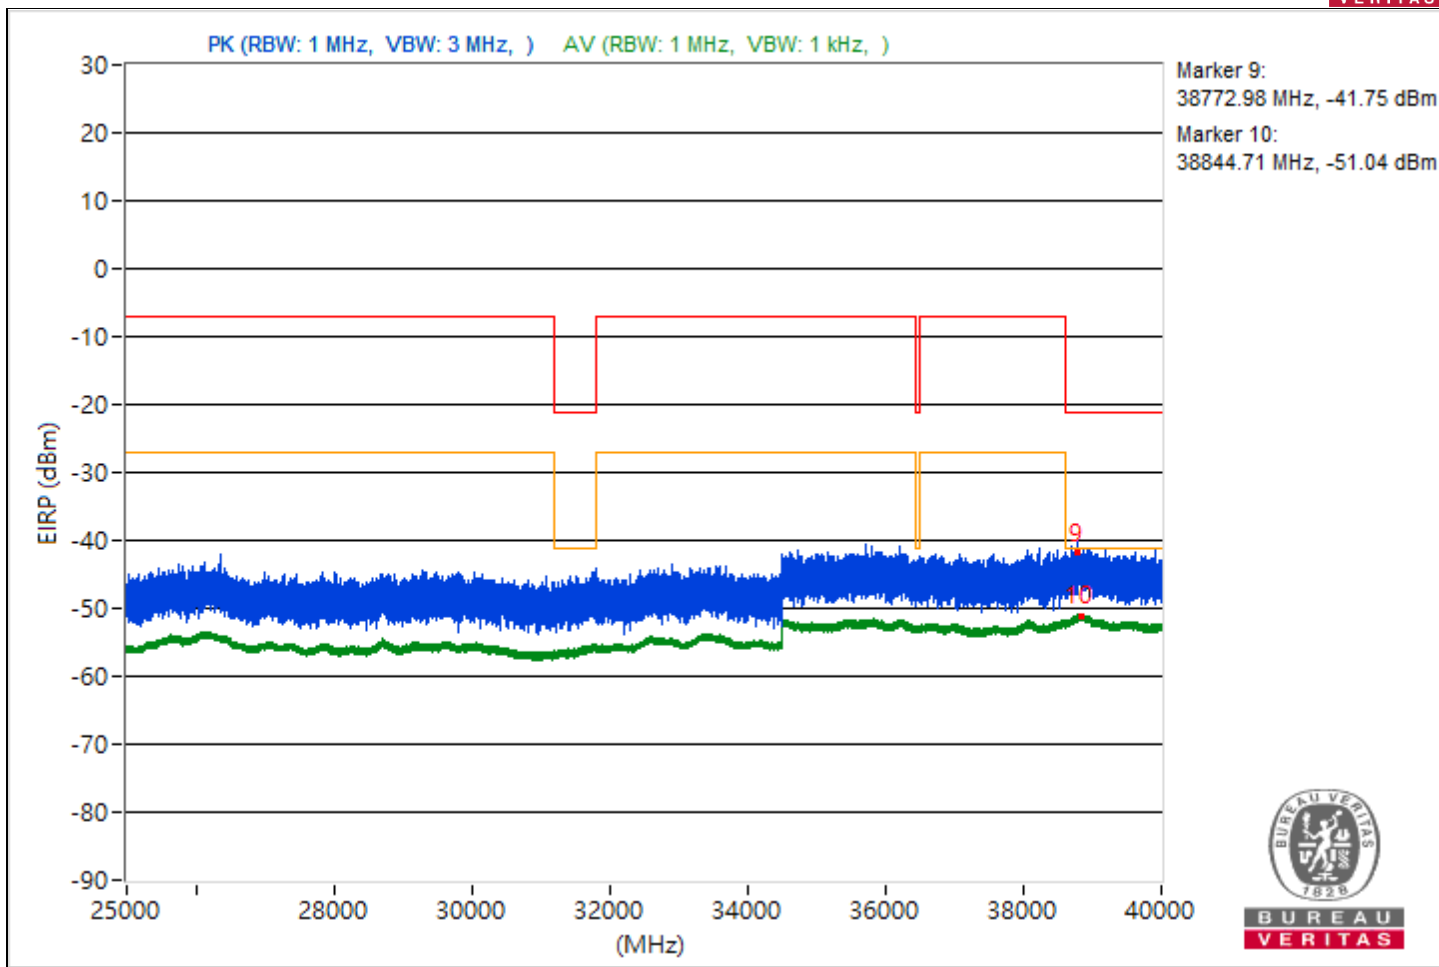





RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4997.23	58.86 PK	74	-15.14	-45.55	-50.43	7.93	-36.4
2	3821.47	48.8 AV	54	-5.2	-57.18	-57.64	7.93	-46.46
3	15418.31	57.58 PK	74	-16.42	-52.97	-46.49	7.93	-37.68
4	14479.91	48.06 AV	54	-5.94	-57.91	-58.39	7.93	-47.2
5	20949.8	60.03 PK	74	-13.97	-43.94	-51	7.93	-35.23
6	21154.1	49.71 AV	54	-4.29	-56.26	-56.74	7.93	-45.55
7	22274.1	61.01 PK	74	-12.99	-49.85	-43	7.93	-34.25
8	22460.4	50.99 AV	54	-3.01	-55.53	-54.91	7.93	-44.27
9	38790.31	54.01 PK	74	-19.99	-55.19	-50.43	7.93	-41.25
10	38830.93	44.34 AV	54	-9.66	-61.54	-62.2	7.93	-50.92

Note: Margin value = Emission Level - Limit value

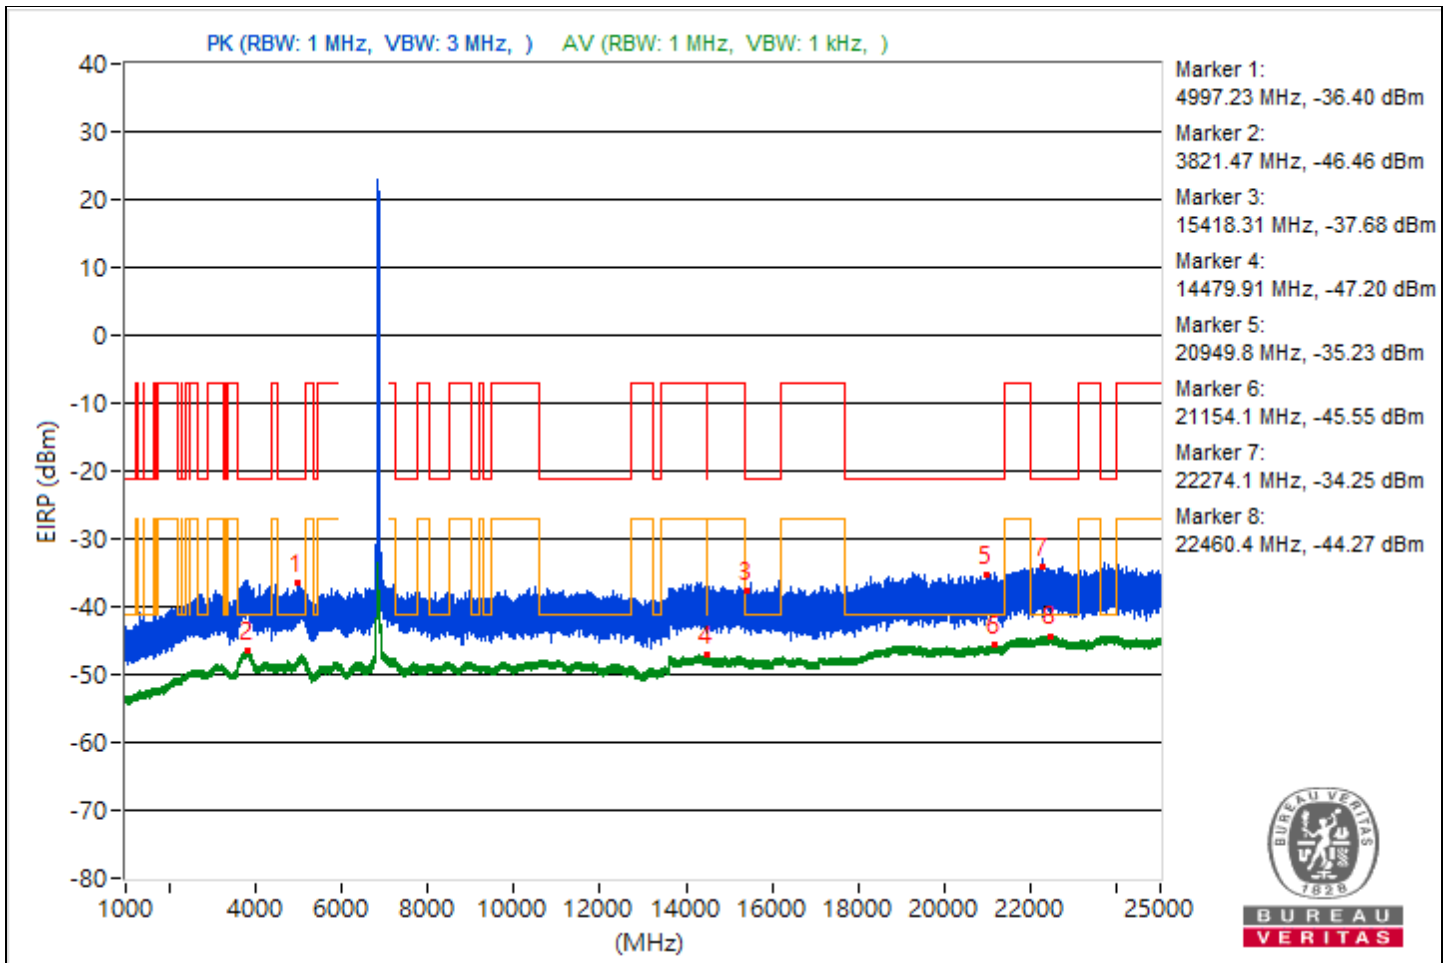

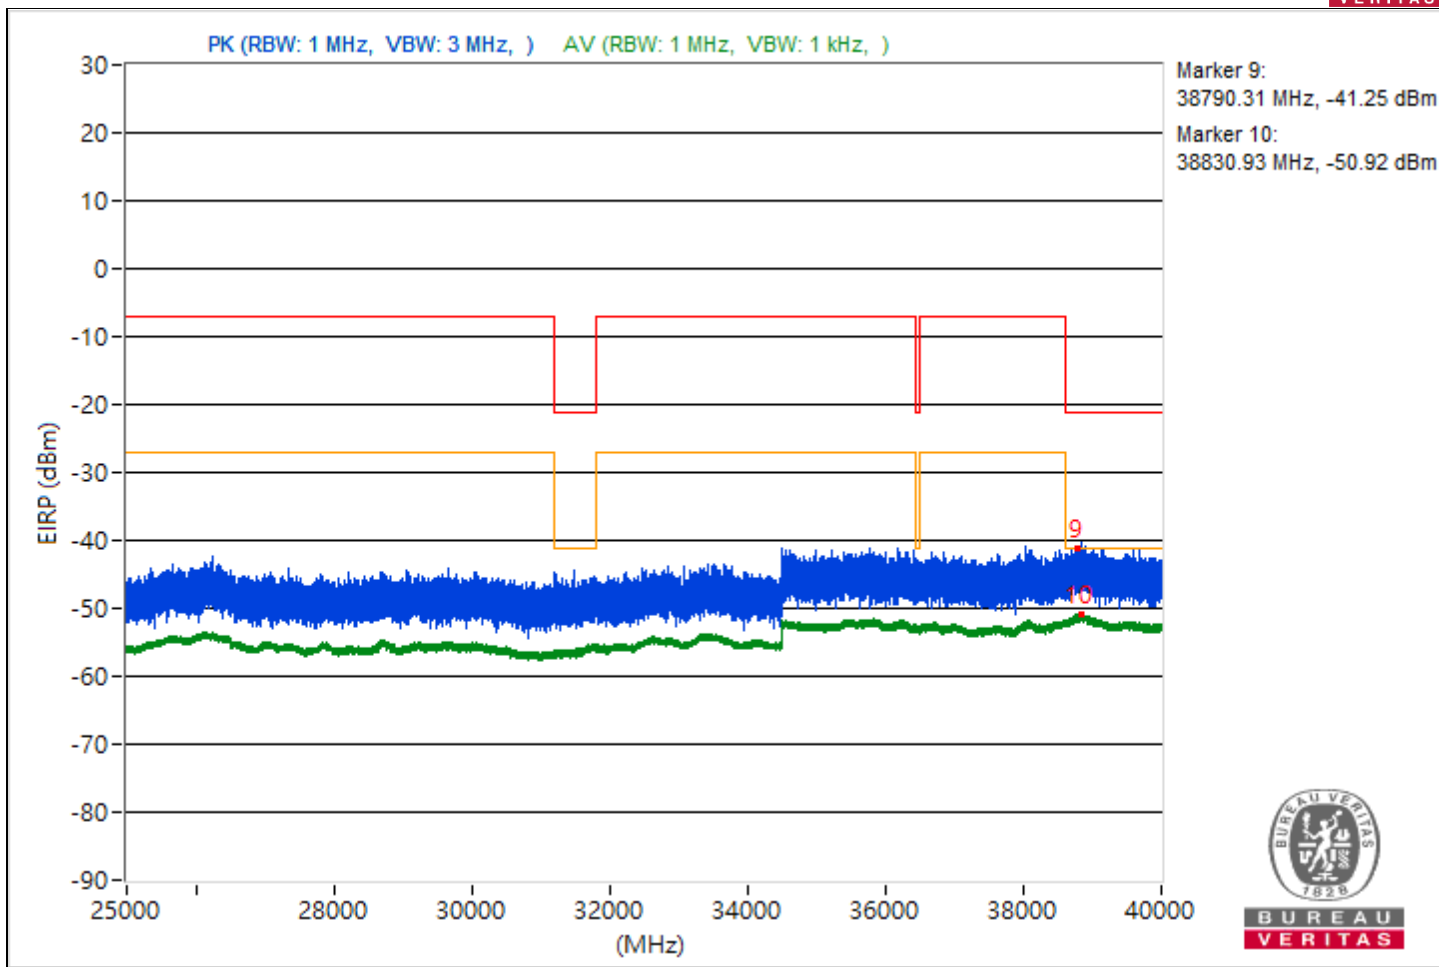


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.55	119.25 PK			12.66	13.7	7.77	23.99
2	*5955.73	110.06 AV			3.97	4.06	7.77	14.8
3	#5923.48	71.22 PK	88.26	-17.04	-37.77	-33.08	7.77	-24.04
4	#5924.82	59.66 AV	68.26	-8.6	-46.38	-46.38	7.77	-35.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

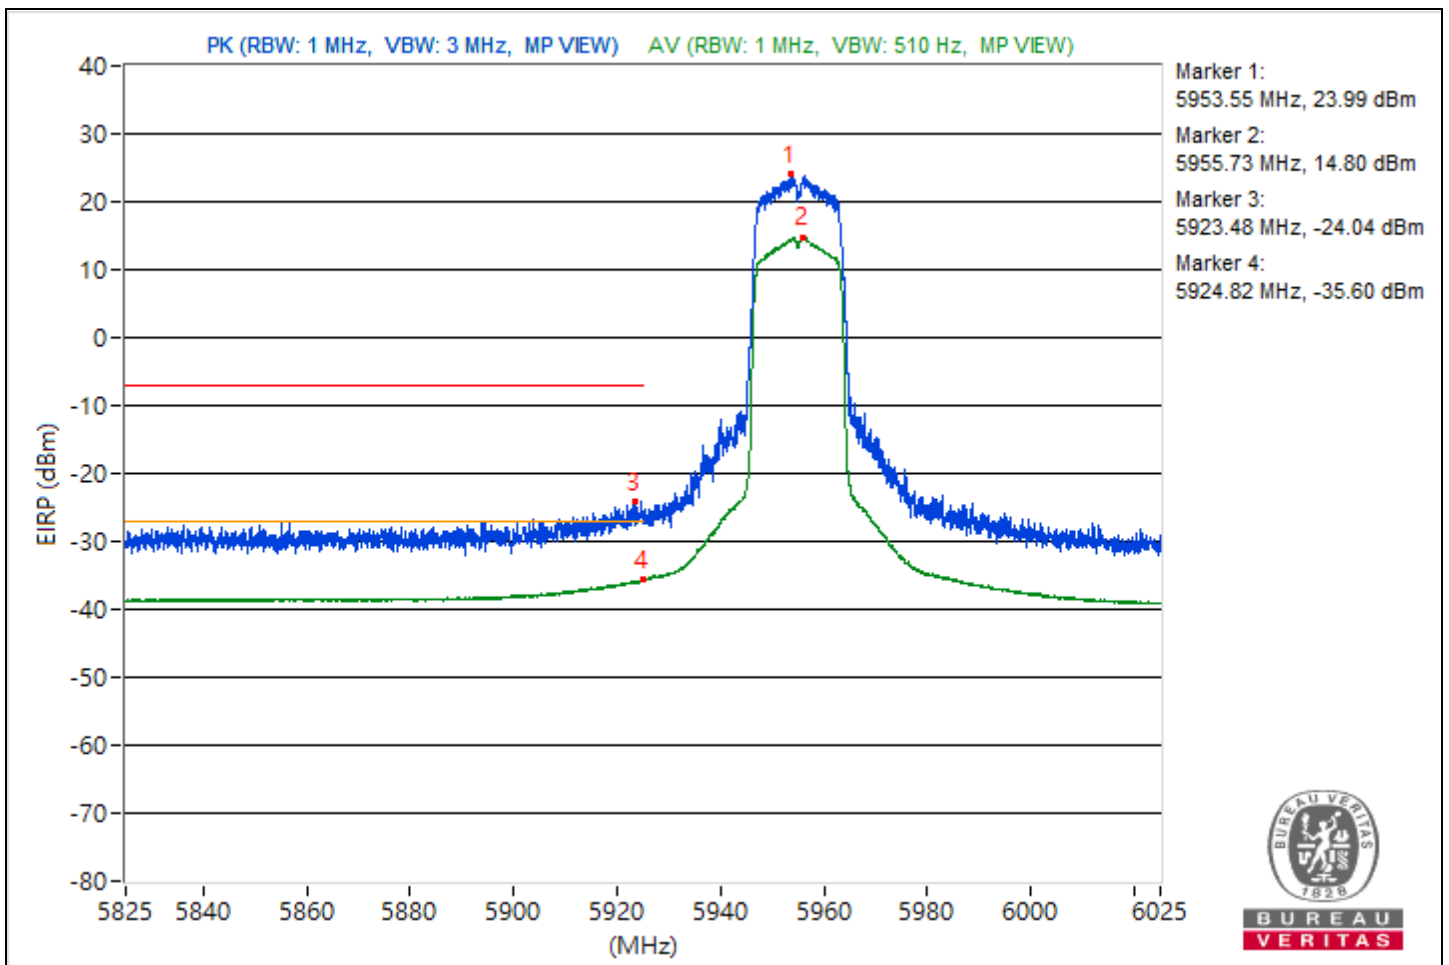


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6855.68	119.07 PK			12.71	13.61	7.62	23.81
2	*6853.99	110.35 AV			4.6	4.32	7.62	15.09
3	#7143.23	58.33 PK	88.26	-29.93	-46.31	-49.32	7.62	-36.93
4	#7125.79	47.2 AV	68.26	-21.06	-58.49	-58.89	7.62	-48.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

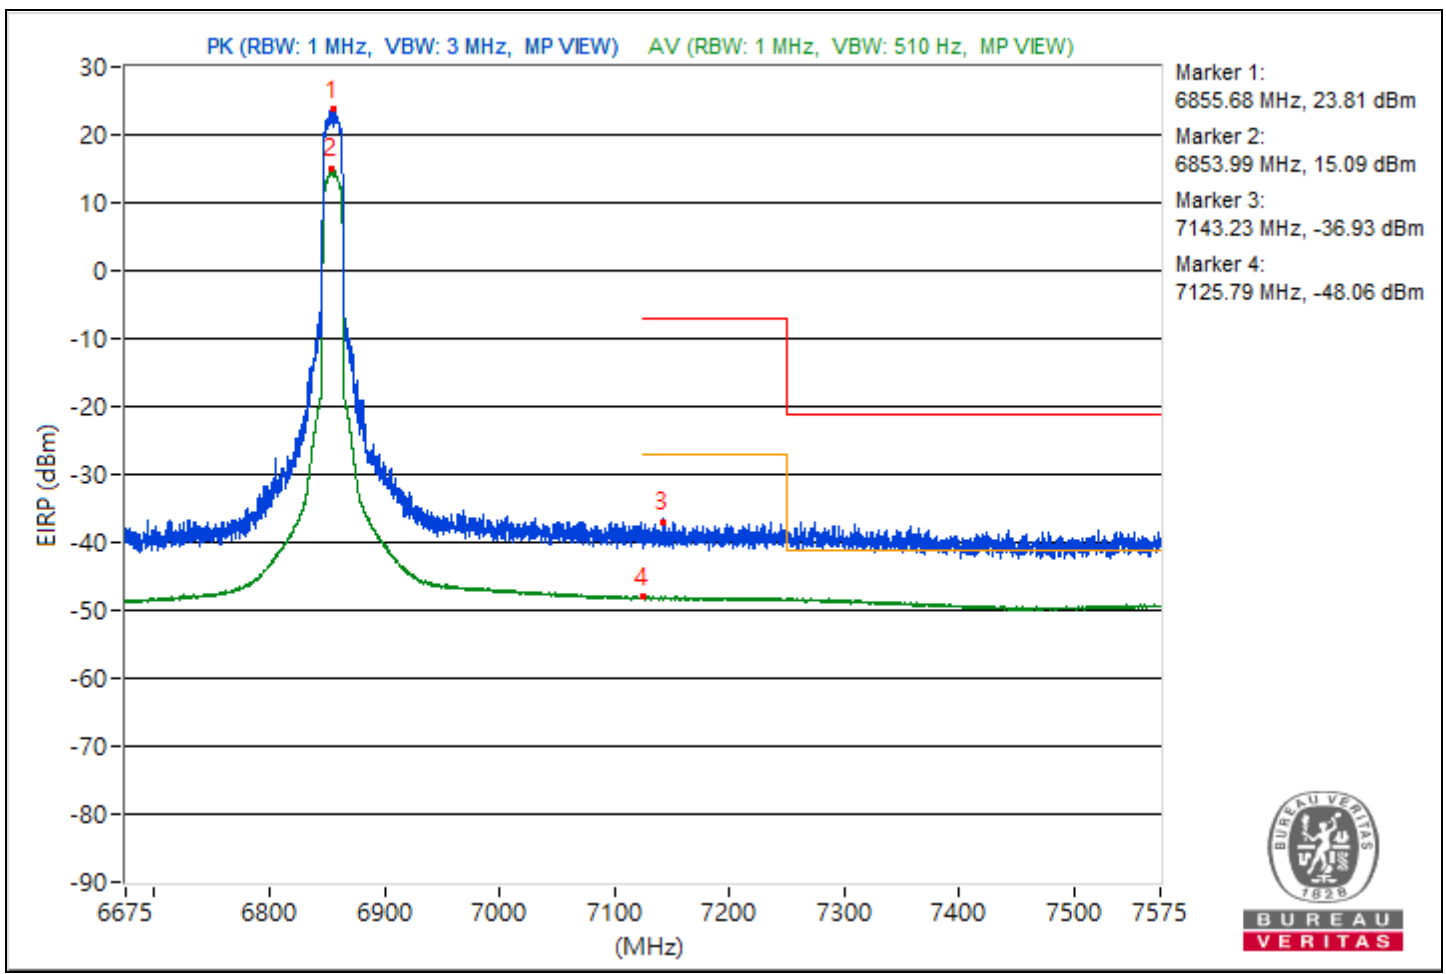





For 2S2T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5118.41	55.84 PK	74	-18.16	-45.49	-50.66	4.92	-39.42
2	3820.61	45.61 AV	54	-8.39	-57.86	-57.31	4.92	-49.65
3	7358.96	55.37 PK	74	-18.63	-52.65	-45.58	4.92	-39.89
4	14485.51	44.76 AV	54	-9.24	-58.7	-58.18	4.92	-50.5
5	19181.9	56.96 PK	74	-17.04	-44.29	-49.85	4.92	-38.3
6	21163.2	46.57 AV	54	-7.43	-57.08	-56.21	4.92	-48.69
7	22377.8	59.2 PK	74	-14.8	-42.44	-46.44	4.92	-36.06
8	22474.1	47.84 AV	54	-6.16	-55.08	-55.63	4.92	-47.42
9	38657.87	51.04 PK	74	-22.96	-50.59	-54.62	4.92	-44.22
10	38831.73	41.24 AV	54	-12.76	-61.62	-62.32	4.92	-54.02

Note: Margin value = Emission Level - Limit value

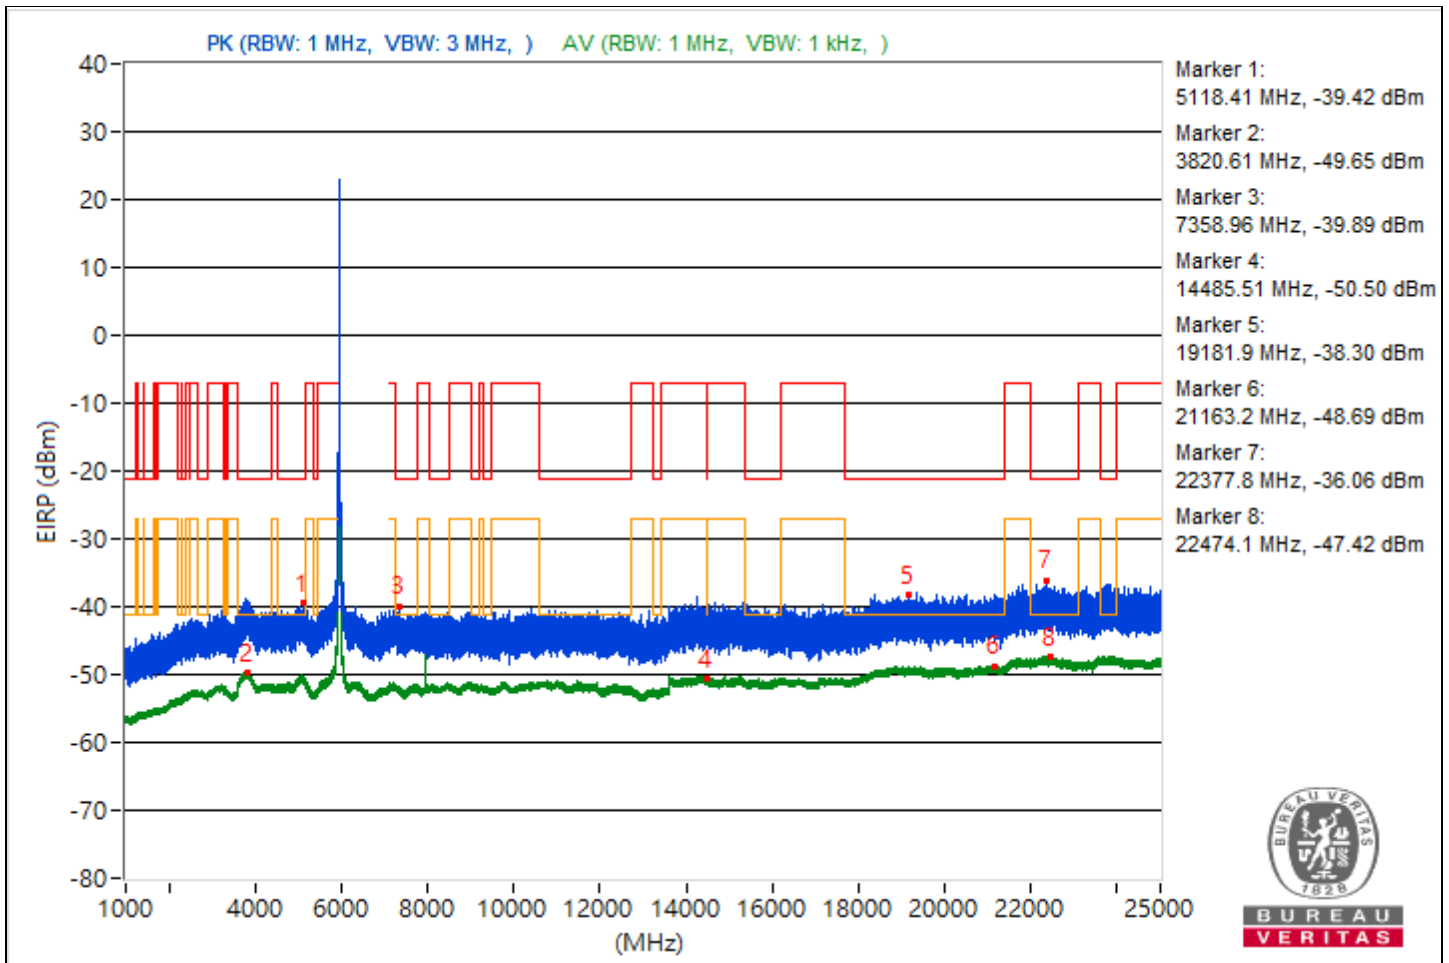

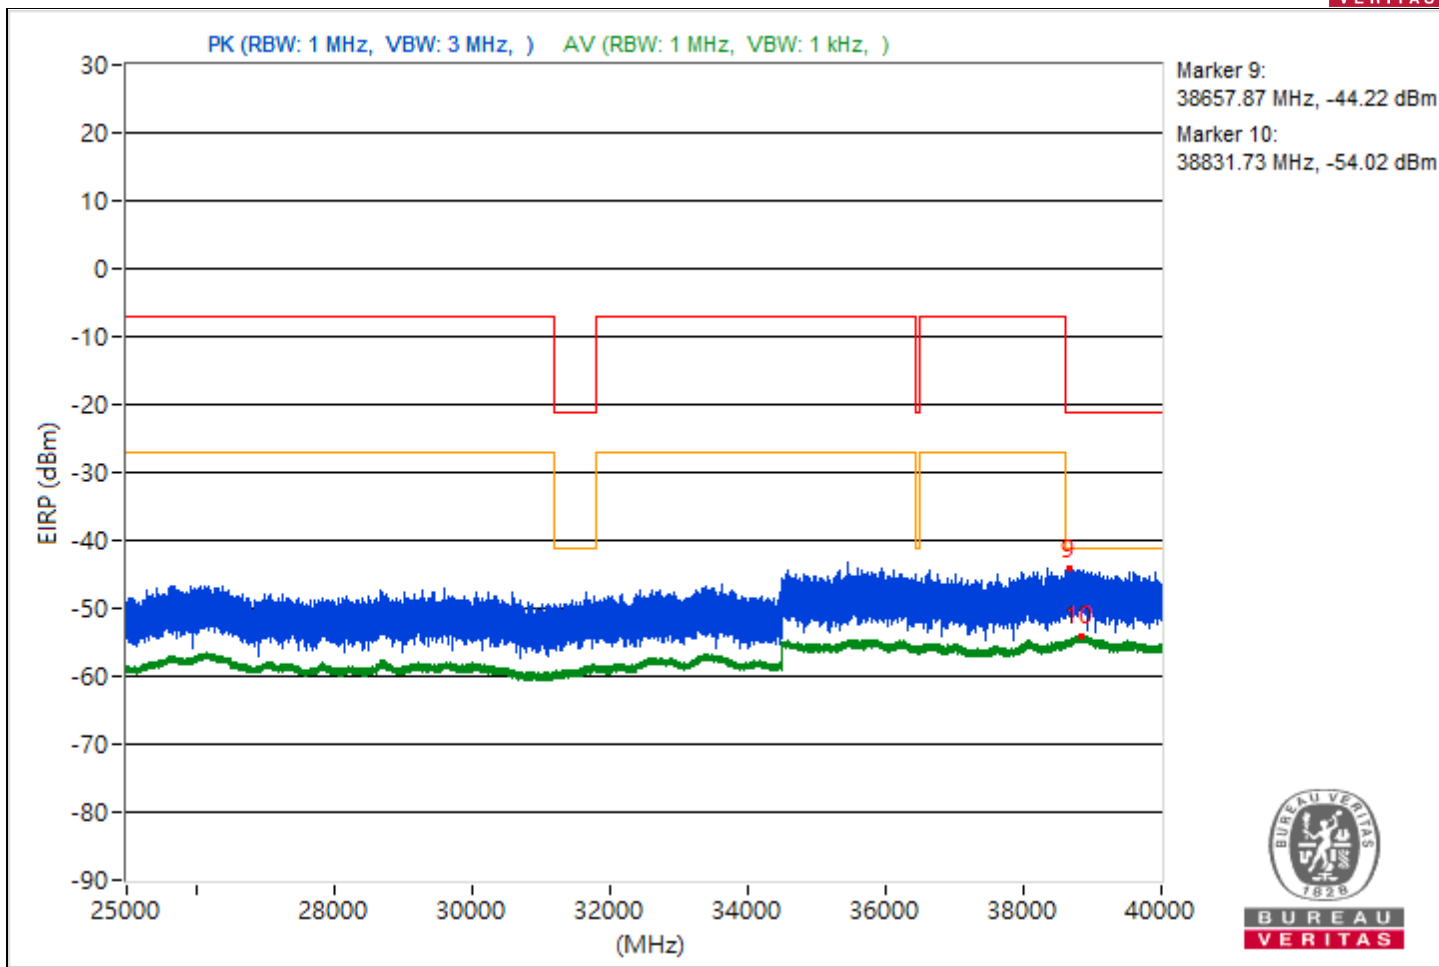





RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5048.64	56.74 PK	74	-17.26	-44.69	-49.45	4.92	-38.52
2	3778.46	45.49 AV	54	-8.51	-57.15	-58.33	4.92	-49.77
3	15988.89	54.8 PK	74	-19.2	-46.36	-52.31	4.92	-40.46
4	8233.24	46.88 AV	54	-7.12	-56.35	-56.27	4.92	-48.38
5	19159	57 PK	74	-17	-44.18	-50.07	4.92	-38.26
6	21110	46.68 AV	54	-7.32	-56.76	-56.27	4.92	-48.58
7	23654.8	58.84 PK	74	-15.16	-47.17	-42.65	4.92	-36.42
8	23657.7	47.72 AV	54	-6.28	-55.06	-55.92	4.92	-47.54
9	38793.69	52.71 PK	74	-21.29	-53.59	-48.69	4.92	-42.55
10	38844.8	41.22 AV	54	-12.78	-62.32	-61.65	4.92	-54.04

Note: Margin value = Emission Level - Limit value

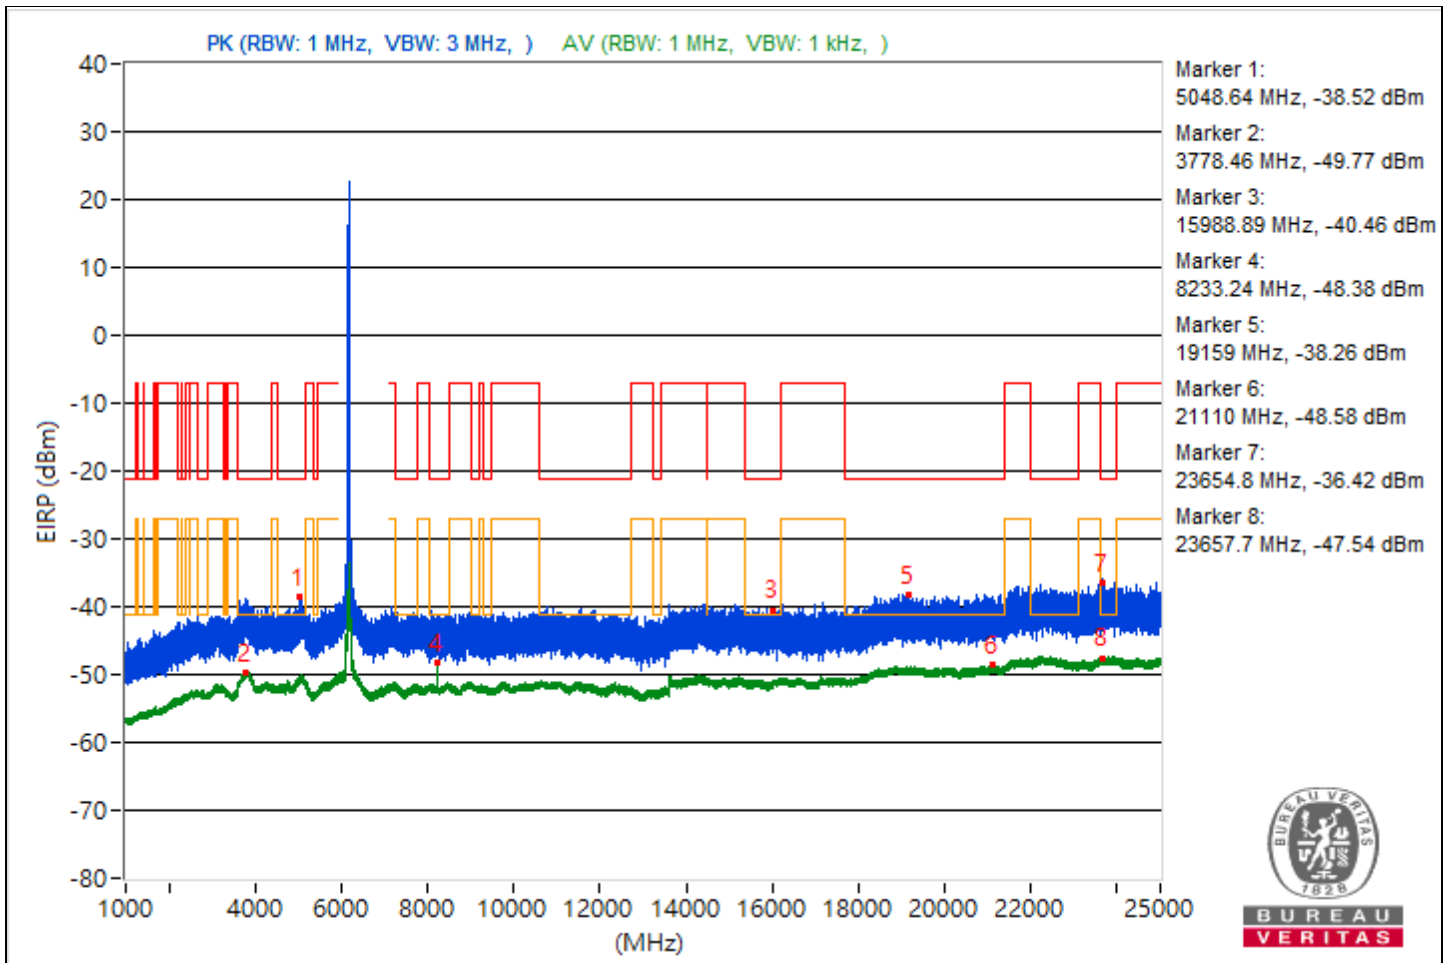

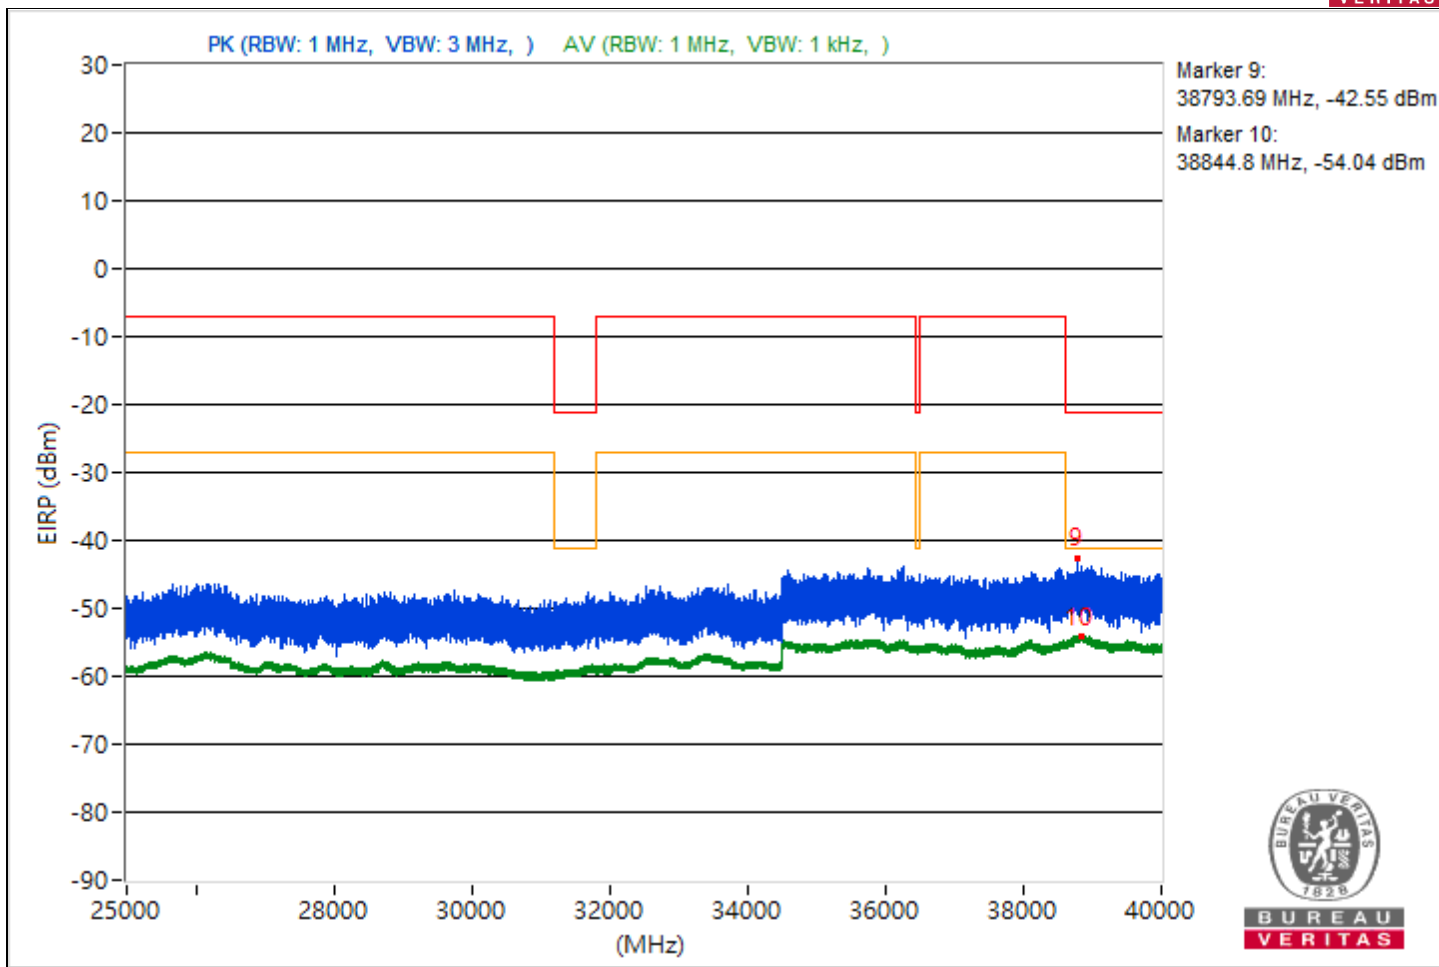





RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.96	56.27 PK	74	-17.73	-45.44	-49.19	4.92	-38.99
2	3799.3	45.56 AV	54	-8.44	-57.27	-58.03	4.92	-49.7
3	15455.82	54.73 PK	74	-19.27	-46.37	-52.63	4.92	-40.53
4	14495.38	44.7 AV	54	-9.3	-58.83	-58.18	4.92	-50.56
5	20617.7	56.79 PK	74	-17.21	-44.6	-49.53	4.92	-38.47
6	21124.3	46.64 AV	54	-7.36	-56.81	-56.32	4.92	-48.62
7	22310.6	58.49 PK	74	-15.51	-42.8	-48.15	4.92	-36.77
8	23662.9	47.85 AV	54	-6.15	-55.68	-55.03	4.92	-47.41
9	38789.6	51.58 PK	74	-22.42	-49.71	-55.07	4.92	-43.68
10	38799.82	41.36 AV	54	-12.64	-62.18	-61.51	4.92	-53.9

Note: Margin value = Emission Level - Limit value

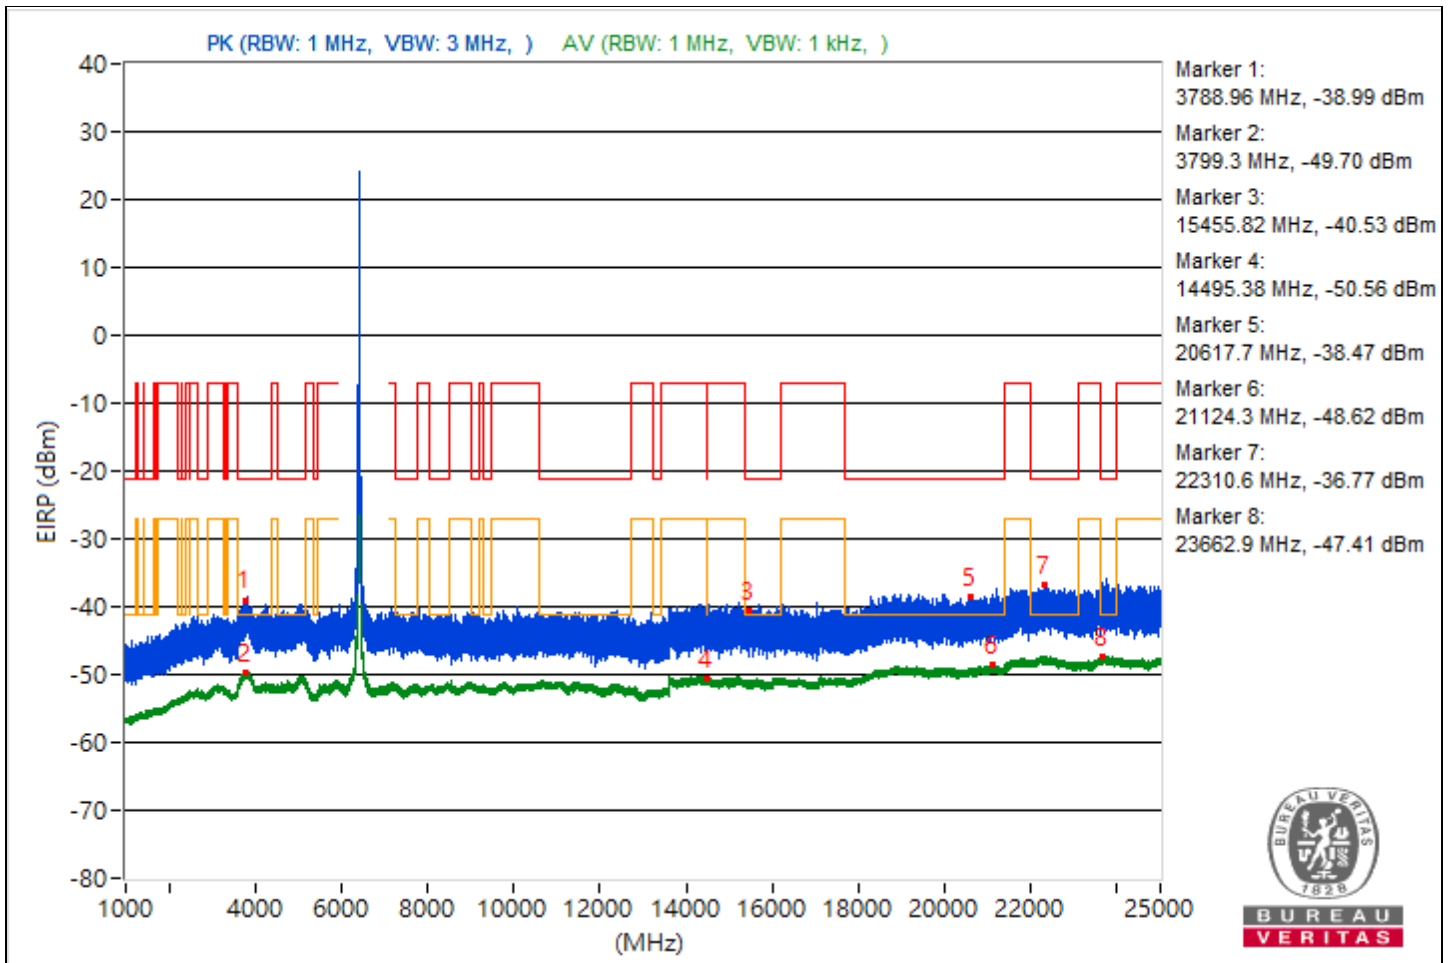

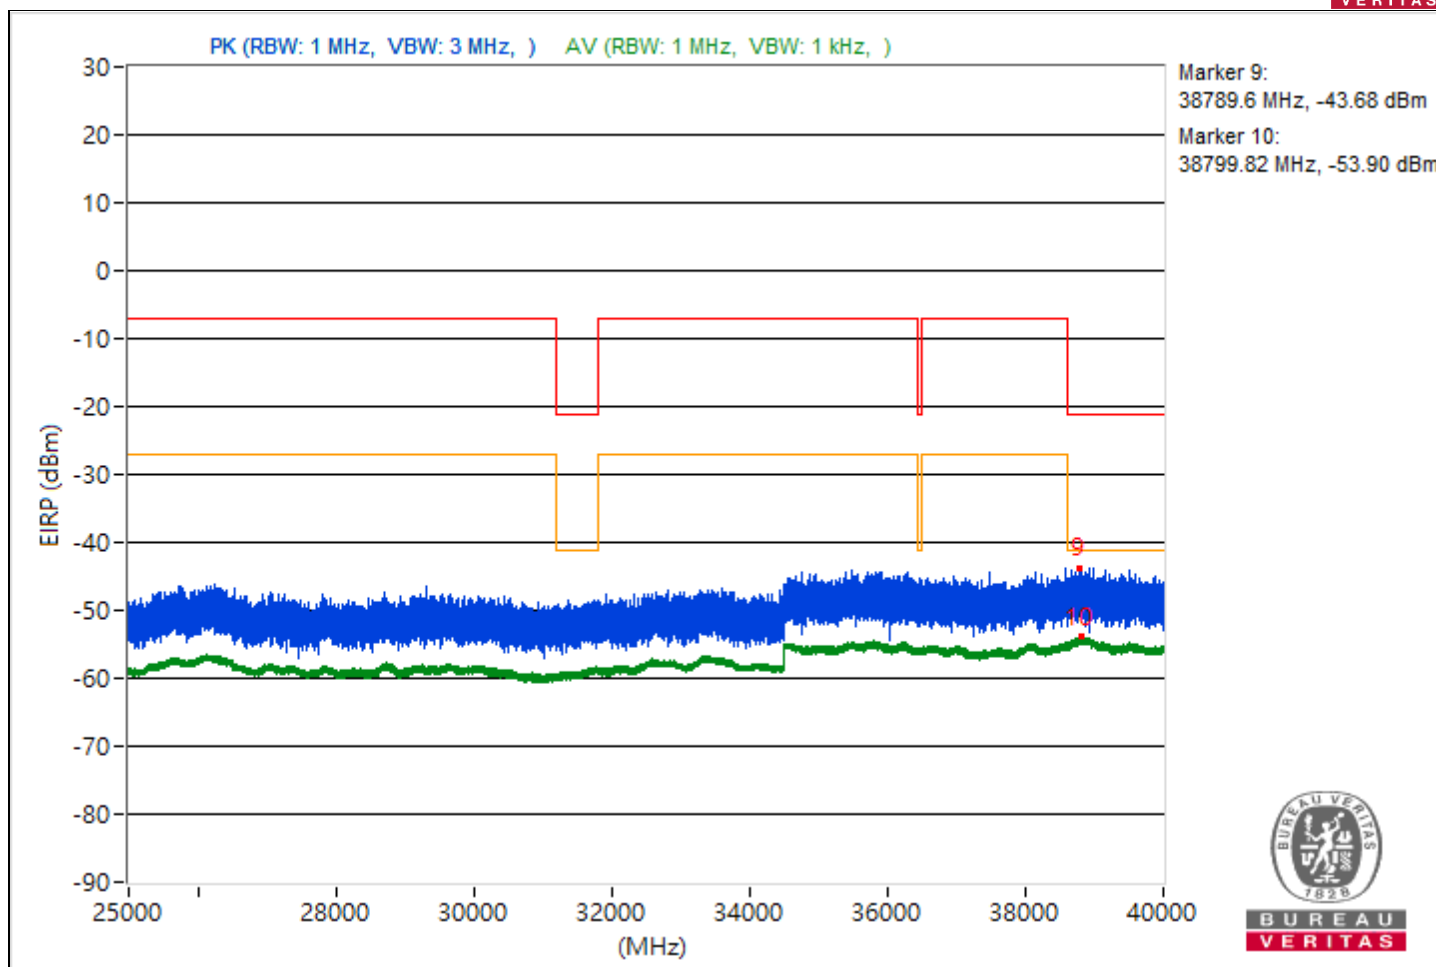





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5115.69	56.62 PK	74	-17.38	-48.37	-45.3	4.92	-38.64
2	3798.37	45.64 AV	54	-8.36	-57.92	-57.22	4.92	-49.62
3	7677.14	55.86 PK	74	-18.14	-45.63	-50.2	4.92	-39.4
4	14482.22	44.77 AV	54	-9.23	-58.6	-58.25	4.92	-50.49
5	19015.8	57.27 PK	74	-16.73	-43.5	-51.89	4.92	-37.99
6	21160.6	46.44 AV	54	-7.56	-56.37	-57.16	4.92	-48.82
7	23738.9	58.6 PK	74	-15.4	-50.08	-42.24	4.92	-36.66
8	22263.3	47.76 AV	54	-6.24	-55.85	-55.05	4.92	-47.5
9	38831.82	51.31 PK	74	-22.69	-49.89	-55.66	4.92	-43.95
10	38856.98	41.37 AV	54	-12.63	-62	-61.64	4.92	-53.89

Note: Margin value = Emission Level - Limit value

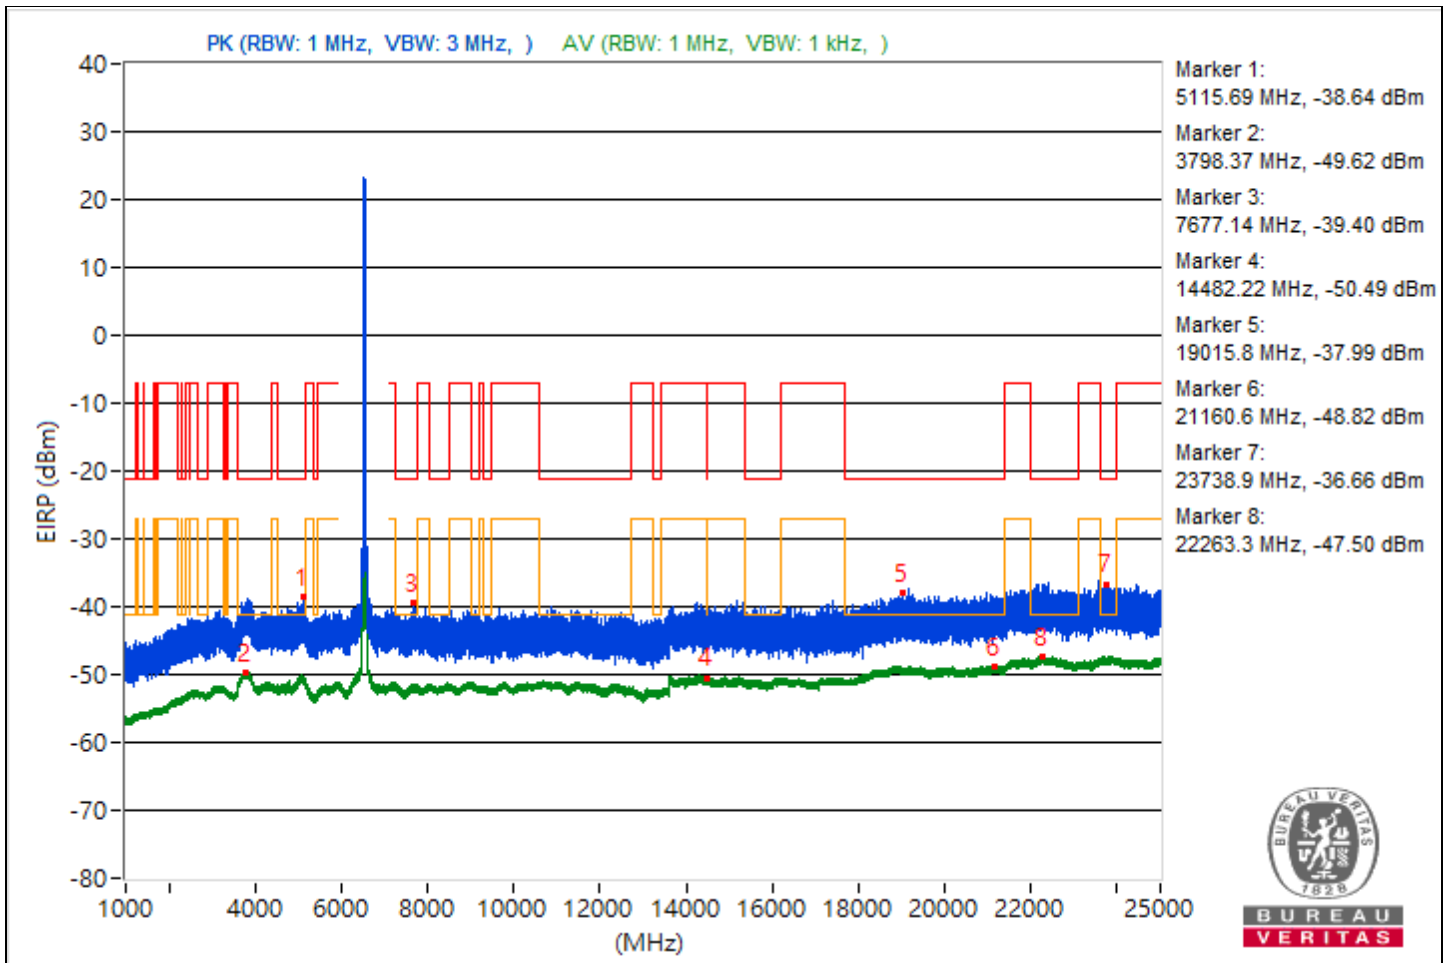

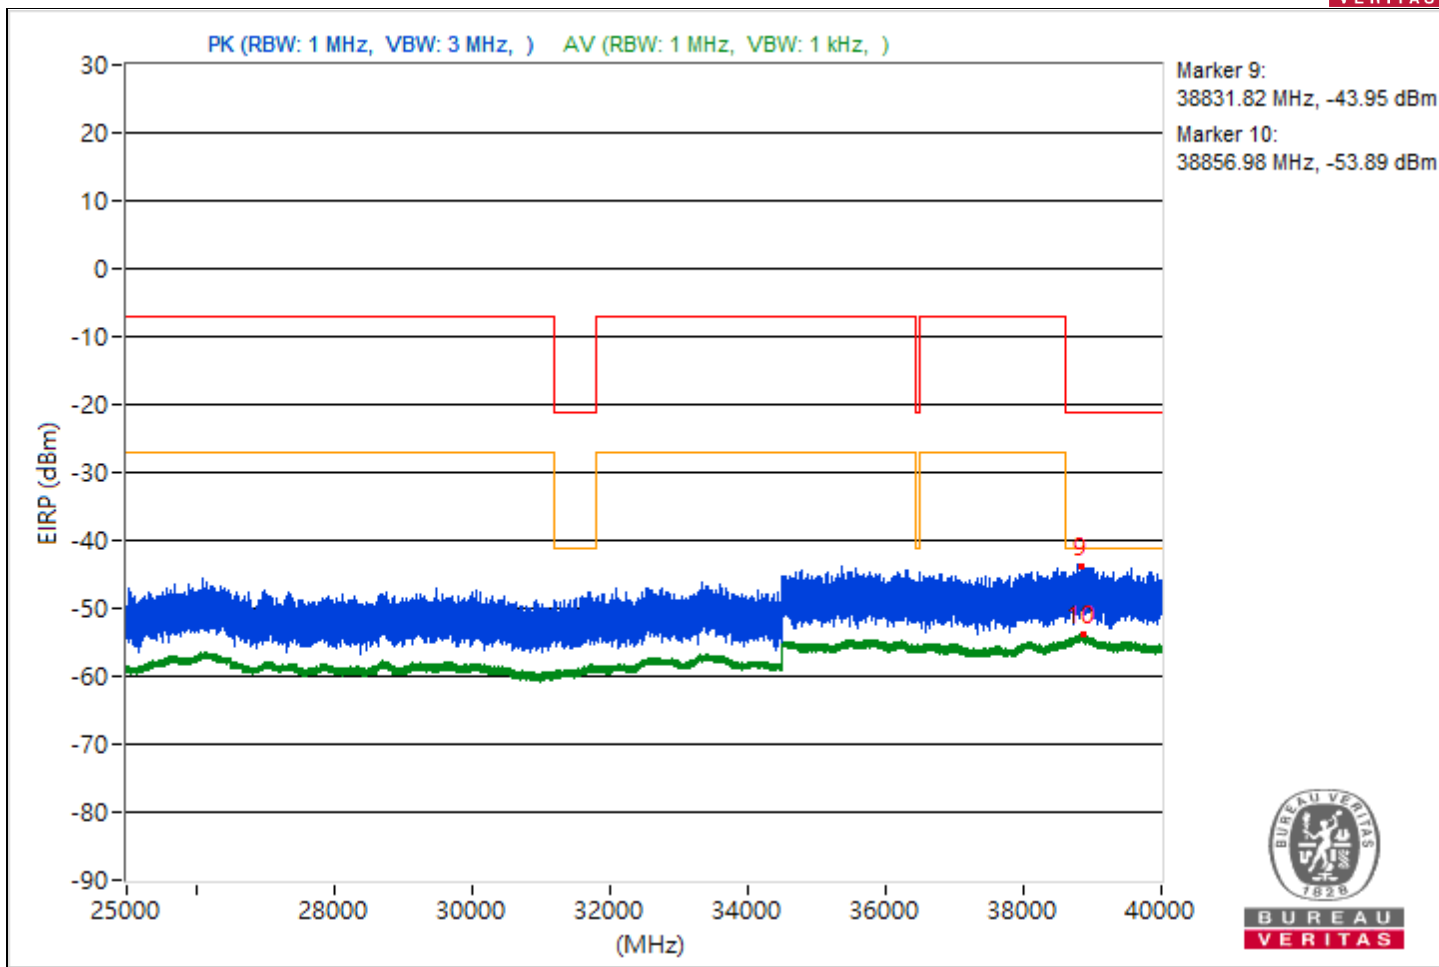





RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.71	56.69 PK	74	-17.31	-44.83	-49.27	4.92	-38.57
2	3812.6	45.58 AV	54	-8.42	-57.28	-57.98	4.92	-49.68
3	7590.58	54.89 PK	74	-19.11	-46.65	-50.99	4.92	-40.37
4	14481.69	44.79 AV	54	-9.21	-58.64	-58.17	4.92	-50.47
5	20055.5	57.58 PK	74	-16.42	-43.64	-49.35	4.92	-37.68
6	21083.7	46.49 AV	54	-7.51	-57.17	-56.28	4.92	-48.77
7	22452.2	58.98 PK	74	-15.02	-47.39	-42.4	4.92	-36.28
8	23672.2	47.91 AV	54	-6.09	-55.7	-54.9	4.92	-47.35
9	39043.11	51.6 PK	74	-22.4	-49.88	-54.47	4.92	-43.66
10	38821.6	41.41 AV	54	-12.59	-62.01	-61.56	4.92	-53.85

Note: Margin value = Emission Level - Limit value

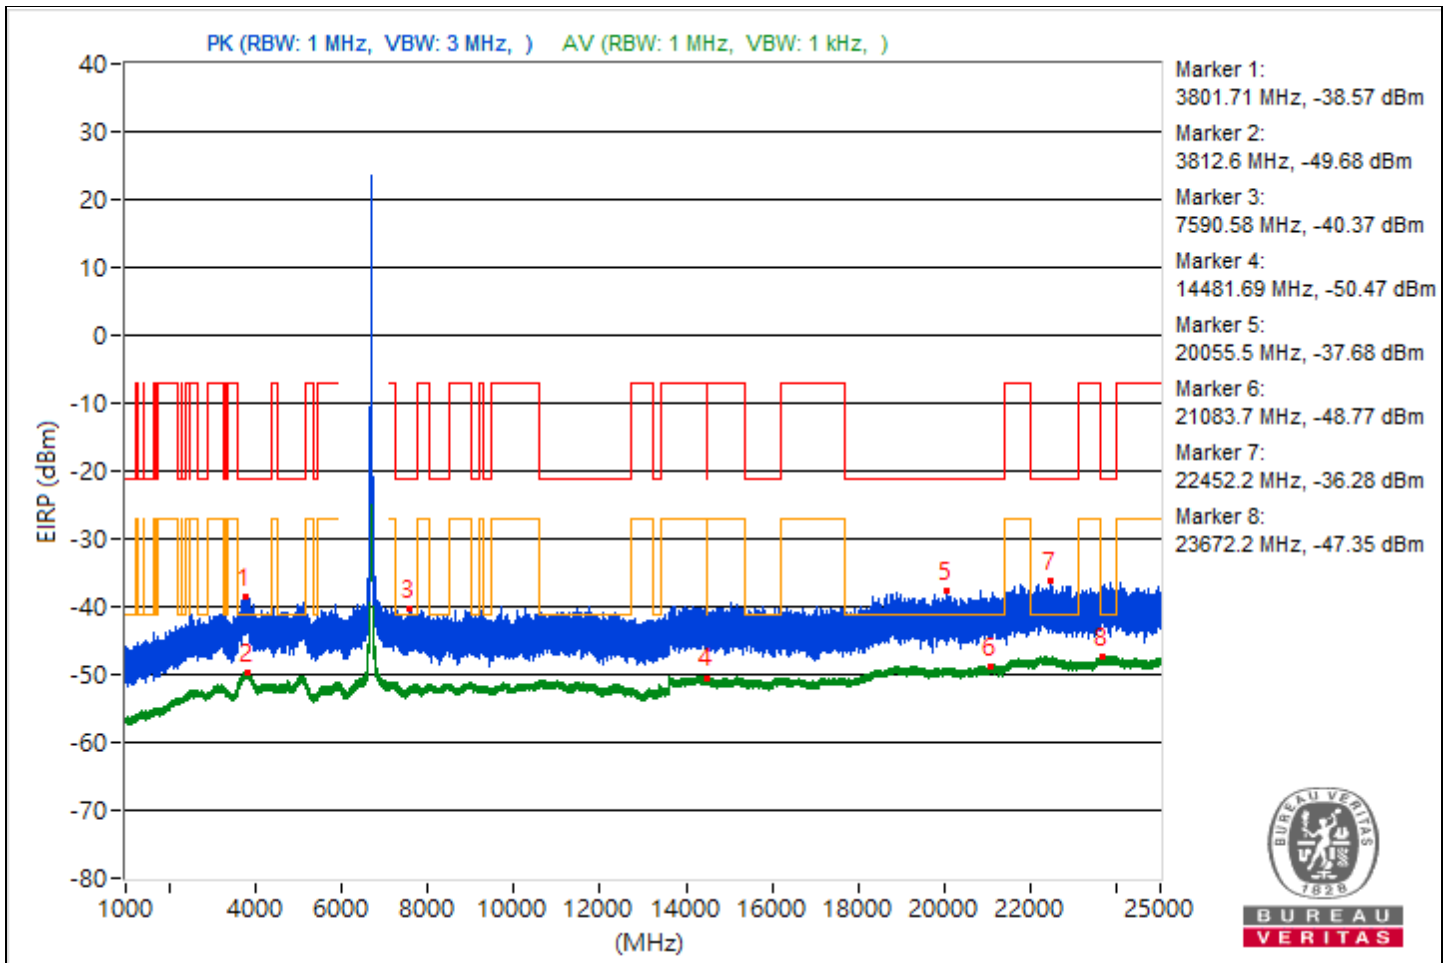

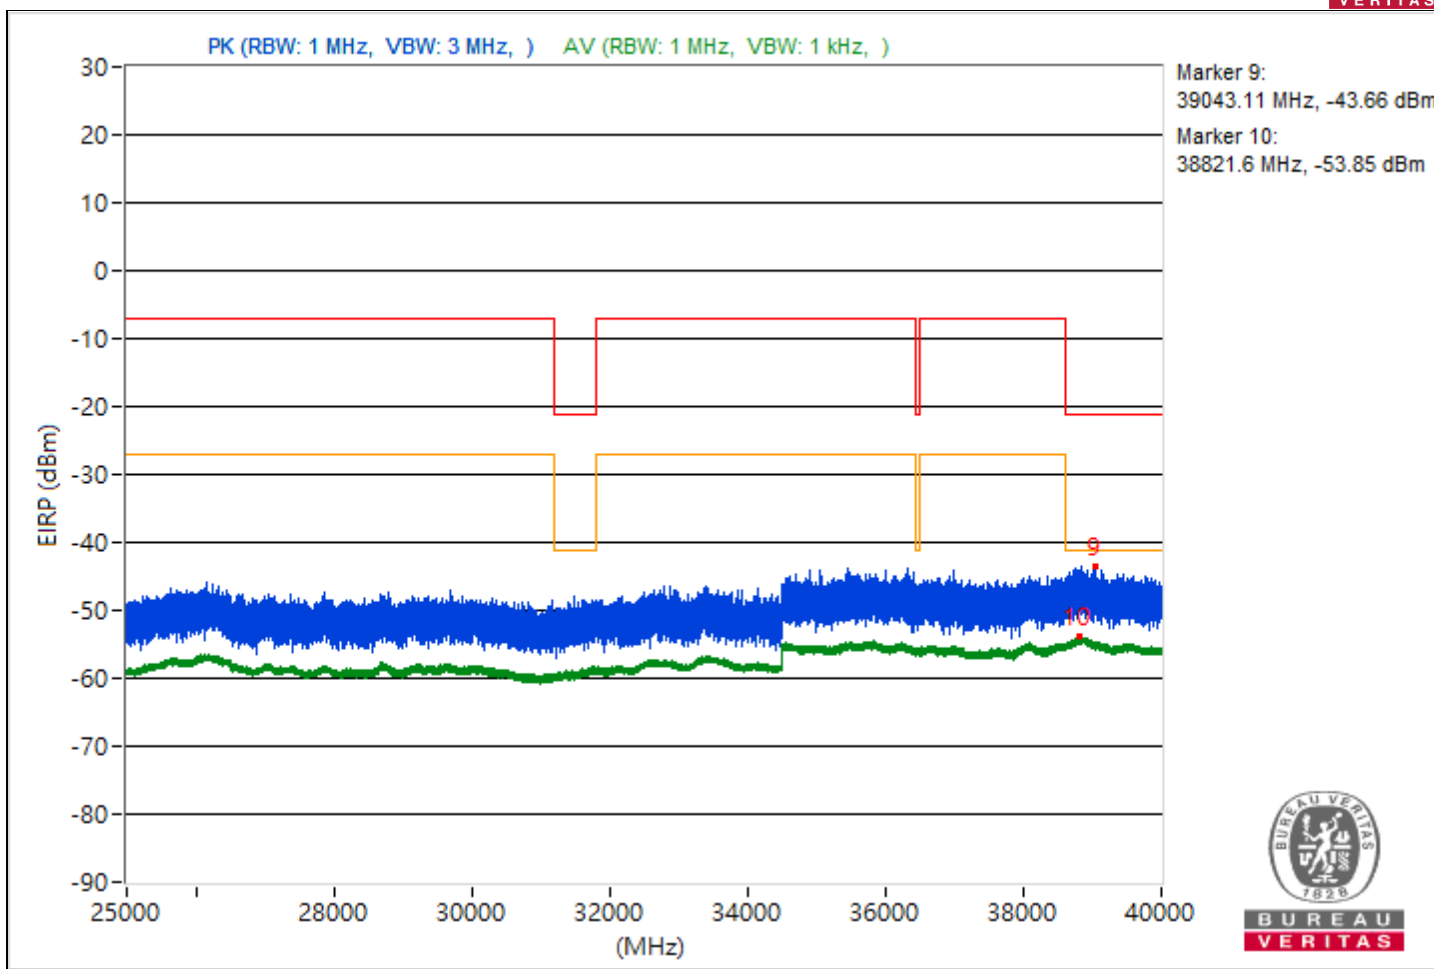





RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.49	57.17 PK	74	-16.83	-47.8	-44.76	4.92	-38.09
2	3794.56	45.55 AV	54	-8.45	-57.28	-58.03	4.92	-49.71
3	15620.62	55.1 PK	74	-18.9	-51.34	-46.25	4.92	-40.16
4	14494.84	44.62 AV	54	-9.38	-58.9	-58.26	4.92	-50.64
5	18864.9	57.17 PK	74	-16.83	-43.91	-50.31	4.92	-38.09
6	21097.8	46.46 AV	54	-7.54	-56.31	-57.18	4.92	-48.8
7	23740.6	58.31 PK	74	-15.69	-43.67	-46.58	4.92	-36.95
8	22264.9	47.93 AV	54	-6.07	-55.58	-54.96	4.92	-47.33
9	38840.44	51.34 PK	74	-22.66	-50.01	-55.11	4.92	-43.92
10	38865.16	41.5 AV	54	-12.5	-61.41	-61.98	4.92	-53.76

Note: Margin value = Emission Level - Limit value

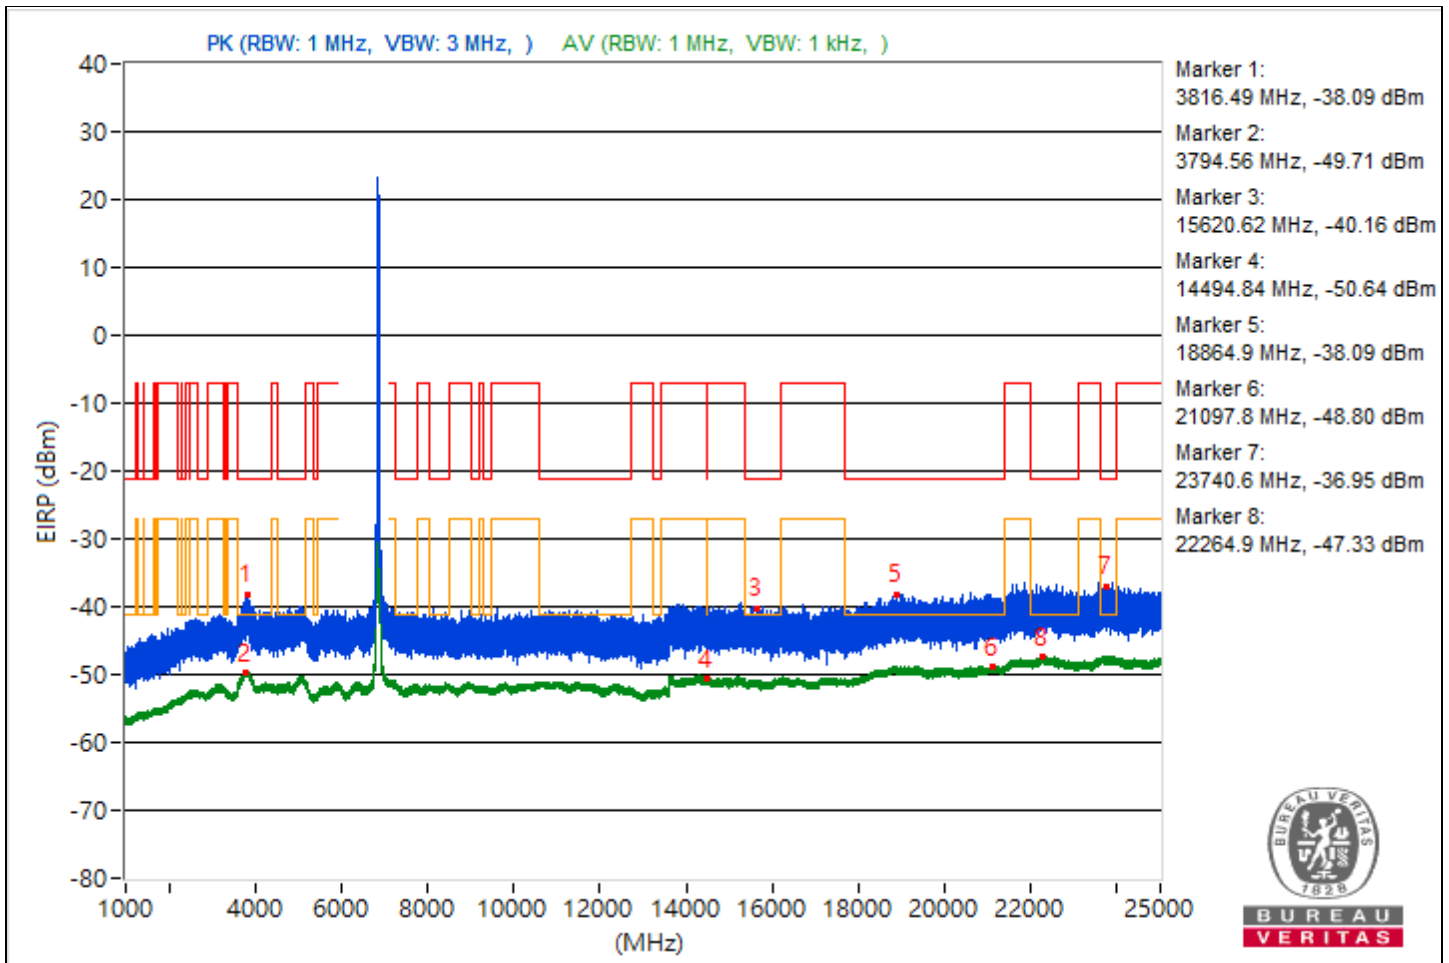

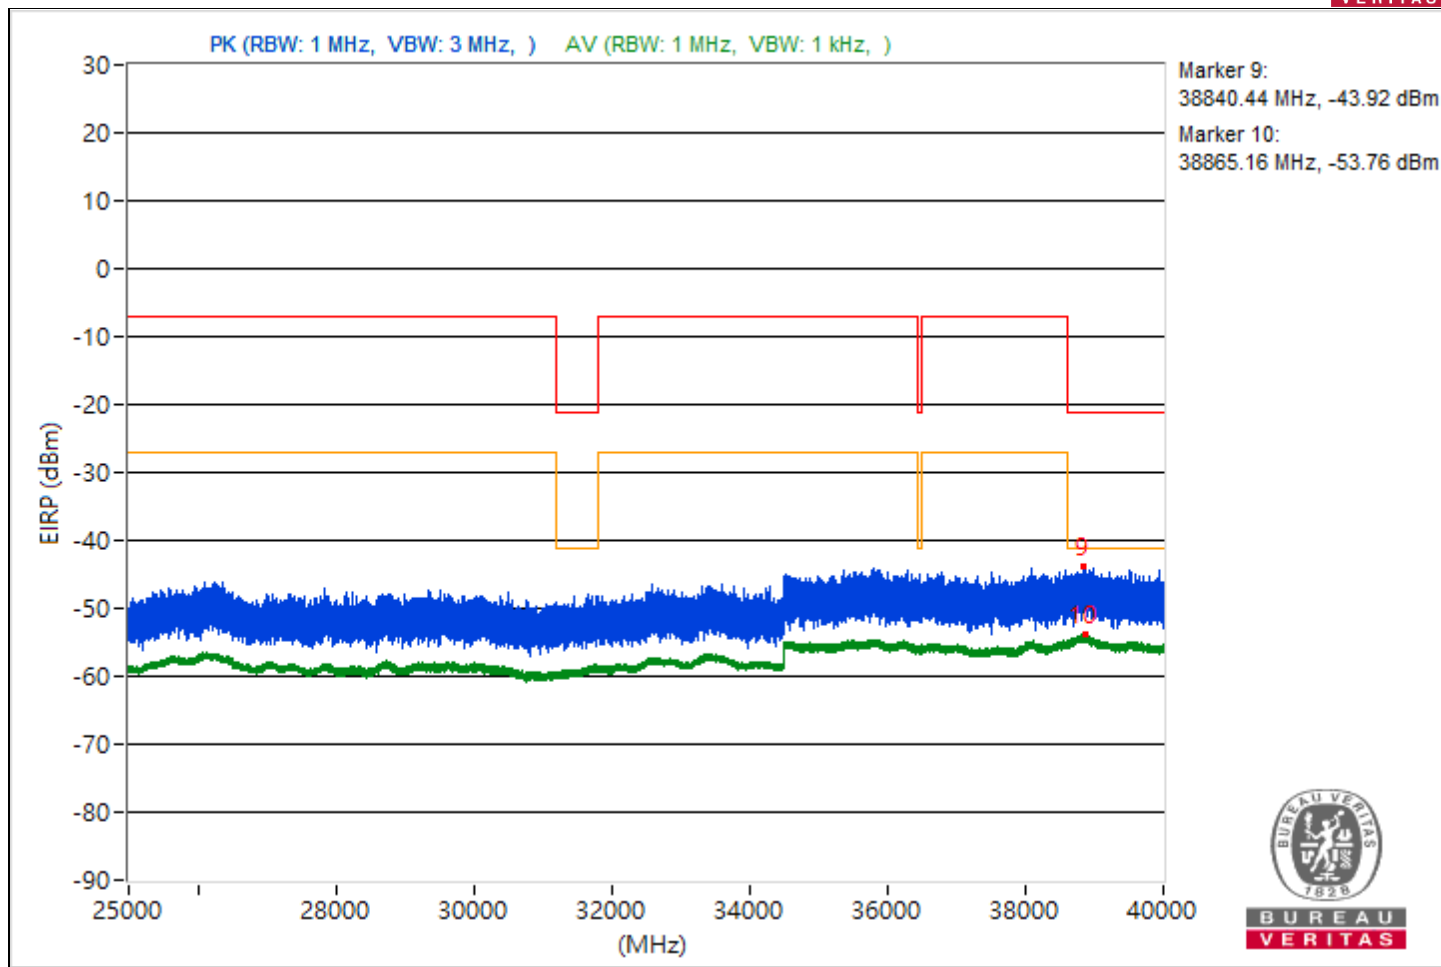





RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3718.02	56.2 PK	74	-17.8	-50.48	-45.08	4.92	-39.06
2	3806.38	45.75 AV	54	-8.25	-57.83	-57.08	4.92	-49.51
3	14495.11	54.94 PK	74	-19.06	-52.54	-46.14	4.92	-40.32
4	14480.27	44.63 AV	54	-9.37	-58.87	-58.28	4.92	-50.63
5	19852.7	57.51 PK	74	-16.49	-49.43	-43.7	4.92	-37.75
6	21148.7	46.55 AV	54	-7.45	-57.15	-56.19	4.92	-48.71
7	23685.4	58.8 PK	74	-15.2	-50.96	-41.89	4.92	-36.46
8	22267.5	47.77 AV	54	-6.23	-55.97	-54.93	4.92	-47.49
9	38985.87	51.52 PK	74	-22.48	-56.54	-49.43	4.92	-43.74
10	38867.64	41.37 AV	54	-12.63	-62.16	-61.5	4.92	-53.89

Note: Margin value = Emission Level - Limit value

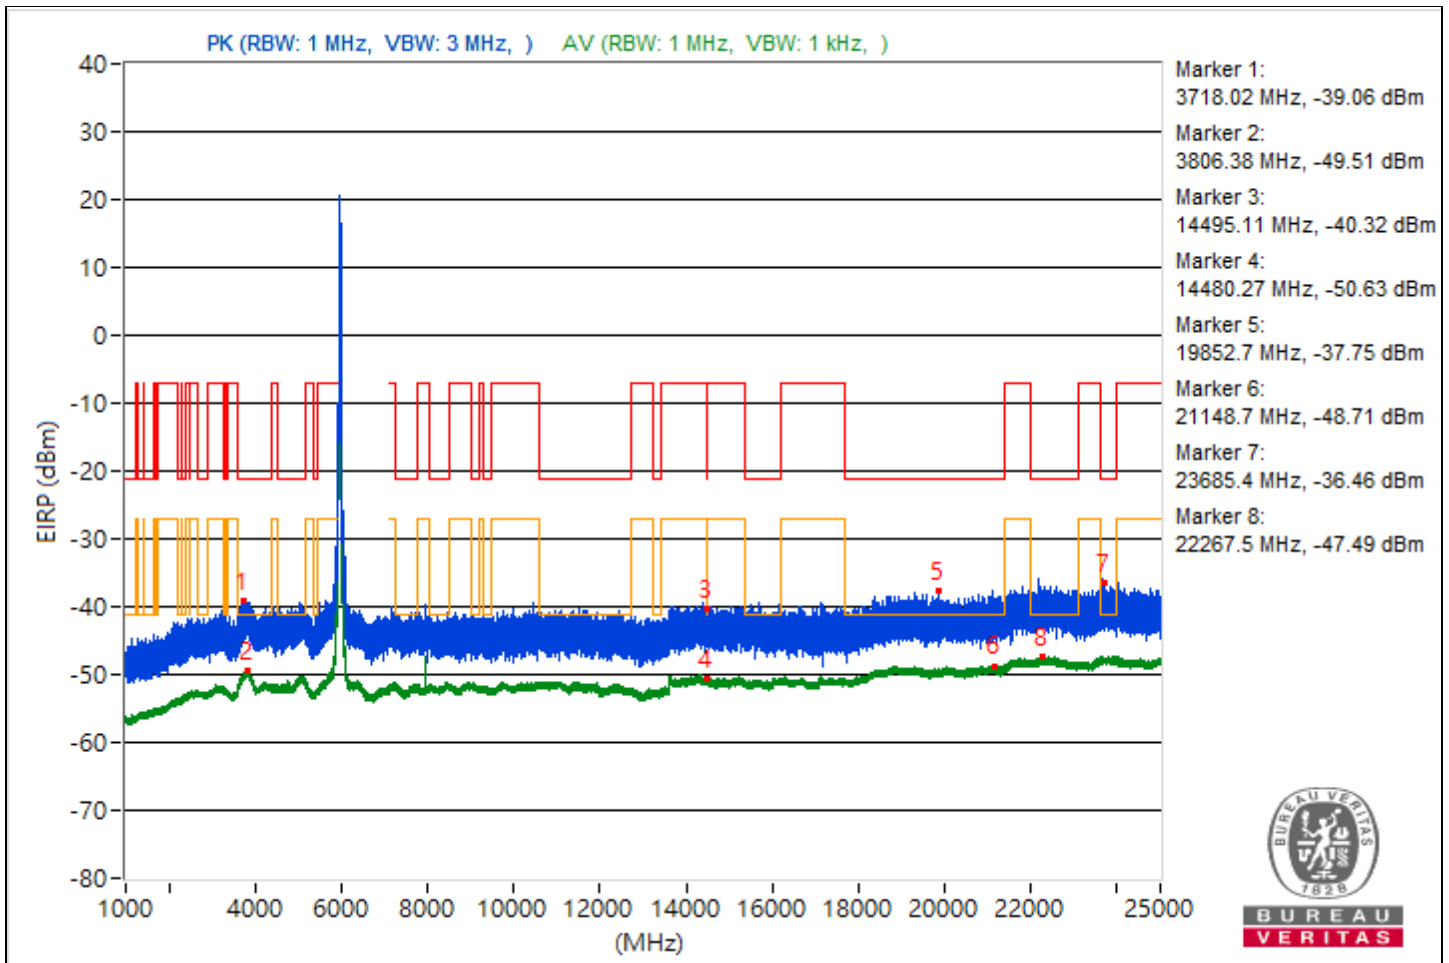

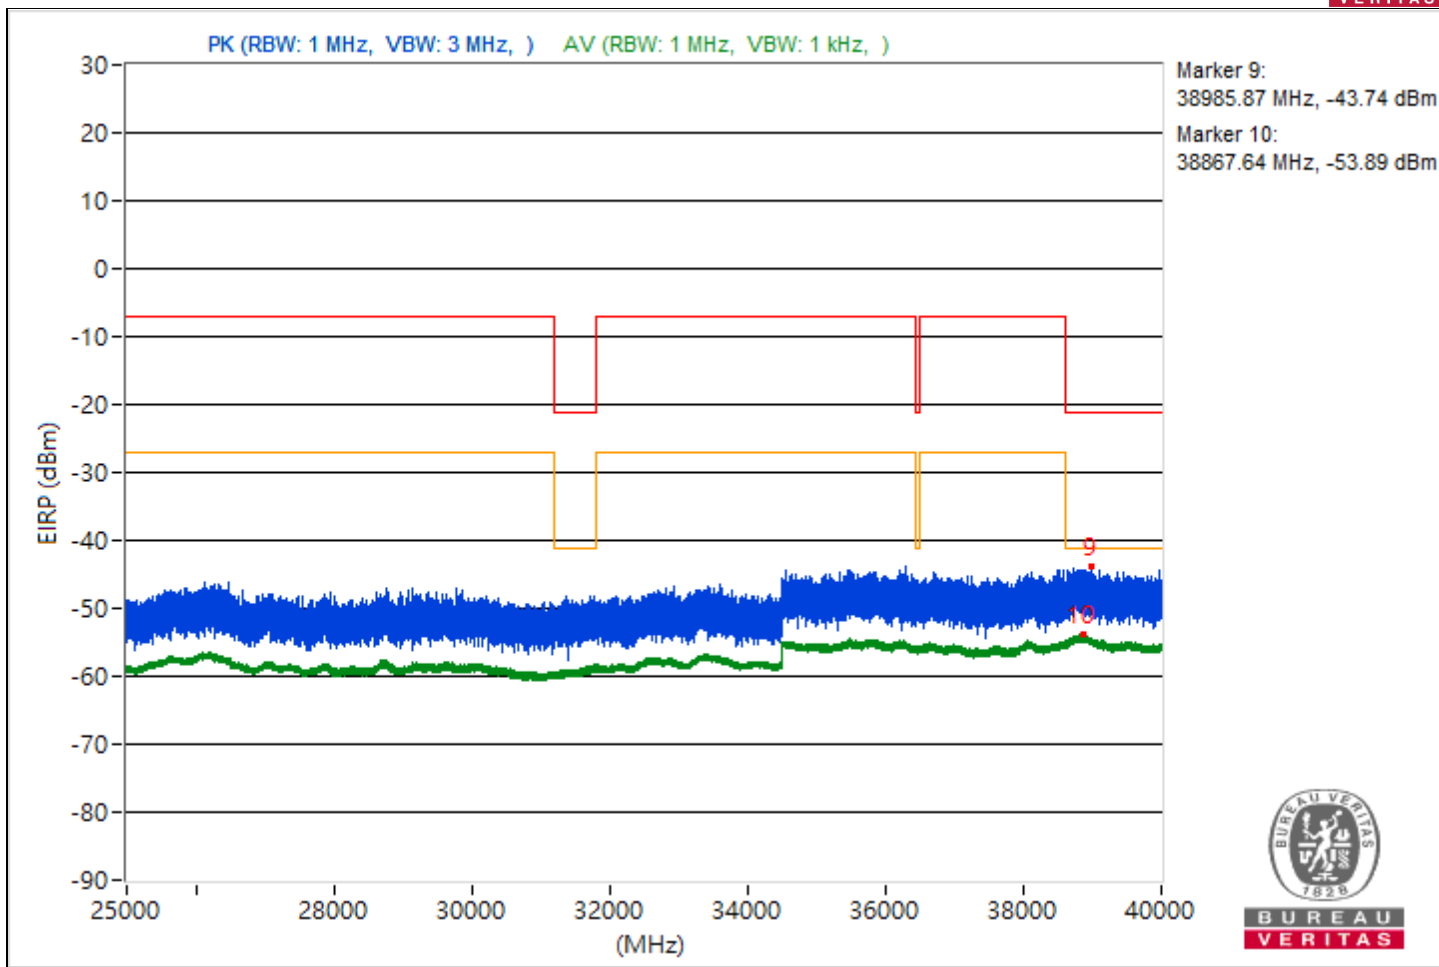





RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.97	56.45 PK	74	-17.55	-45.12	-49.34	4.92	-38.81
2	3769.82	45.63 AV	54	-8.37	-57.17	-57.99	4.92	-49.63
3	11122.13	55.25 PK	74	-18.75	-45.92	-51.83	4.92	-40.01
4	8219.82	46.55 AV	54	-7.45	-56.6	-56.69	4.92	-48.71
5	19069.9	57.46 PK	74	-16.54	-43.7	-49.67	4.92	-37.8
6	21138.9	46.56 AV	54	-7.44	-56.35	-56.93	4.92	-48.7
7	22143	59.42 PK	74	-14.58	-46.2	-42.23	4.92	-35.84
8	23695.9	47.83 AV	54	-6.17	-55.68	-55.06	4.92	-47.43
9	38692.98	52.27 PK	74	-21.73	-50.06	-51.99	4.92	-42.99
10	38804.8	41.37 AV	54	-12.63	-61.63	-62.02	4.92	-53.89

Note: Margin value = Emission Level - Limit value

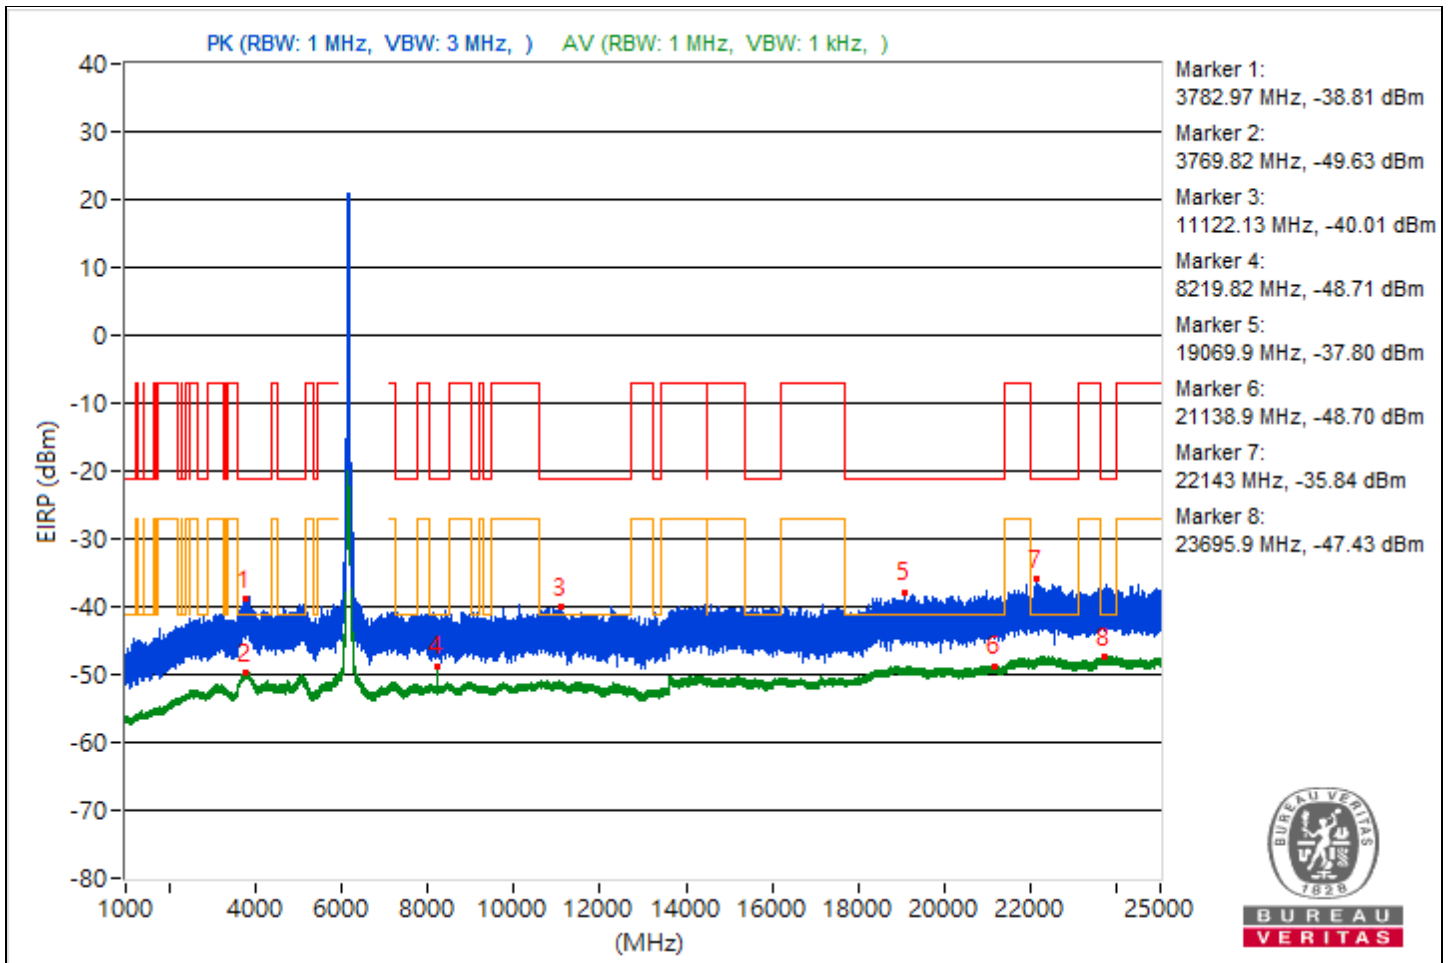

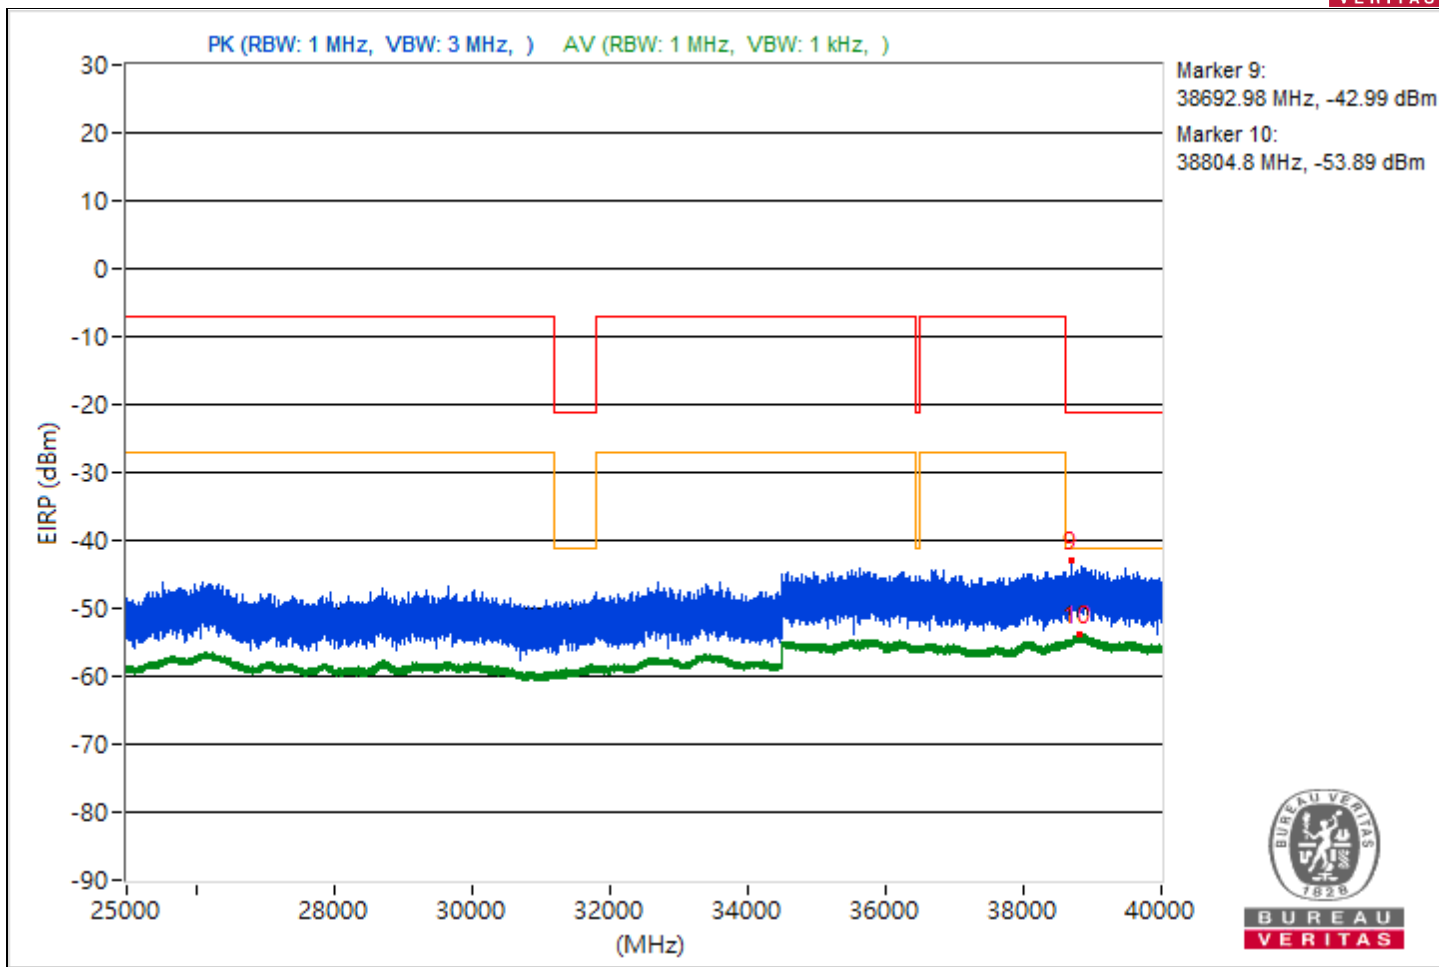





RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.42	55.85 PK	74	-18.15	-46.13	-49.02	4.92	-39.41
2	3823.1	45.88 AV	54	-8.12	-57.48	-57.14	4.92	-49.38
3	11032.8	56.44 PK	74	-17.56	-48.36	-45.58	4.92	-38.82
4	14479.73	44.71 AV	54	-9.29	-58.68	-58.28	4.92	-50.55
5	20107.2	56.9 PK	74	-17.1	-49.12	-44.59	4.92	-38.36
6	21078.3	46.63 AV	54	-7.37	-56.78	-56.35	4.92	-48.63
7	22805.3	58.04 PK	74	-15.96	-42.86	-50.33	4.92	-37.22
8	23668.1	47.88 AV	54	-6.12	-54.87	-55.8	4.92	-47.38
9	38787.29	52.03 PK	74	-21.97	-49.66	-53.47	4.92	-43.23
10	38806.49	41.51 AV	54	-12.49	-61.37	-62.01	4.92	-53.75

Note: Margin value = Emission Level - Limit value

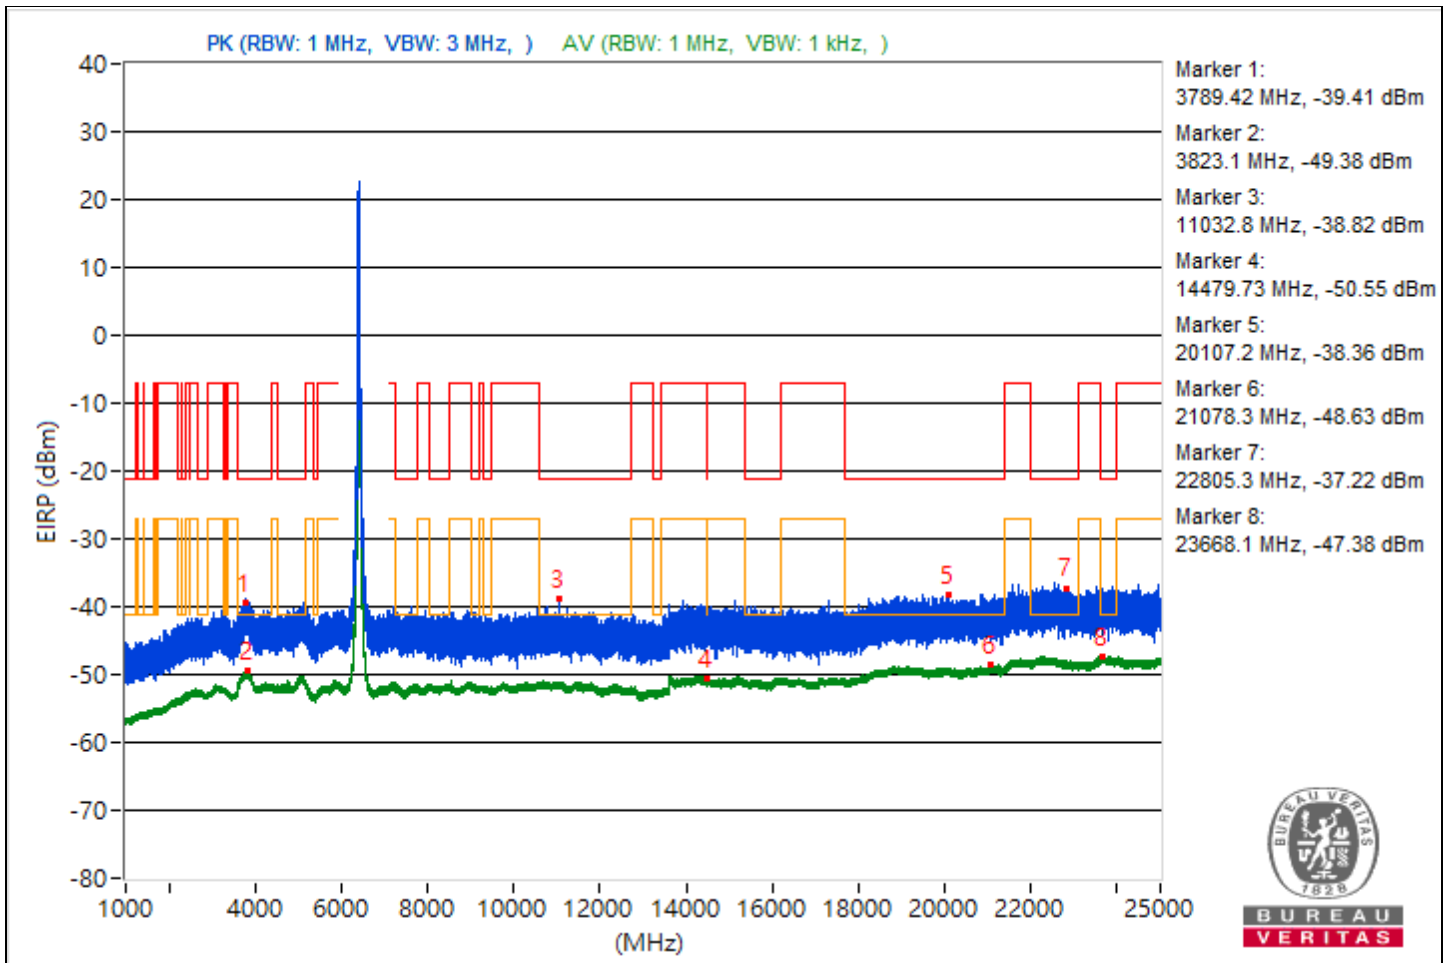

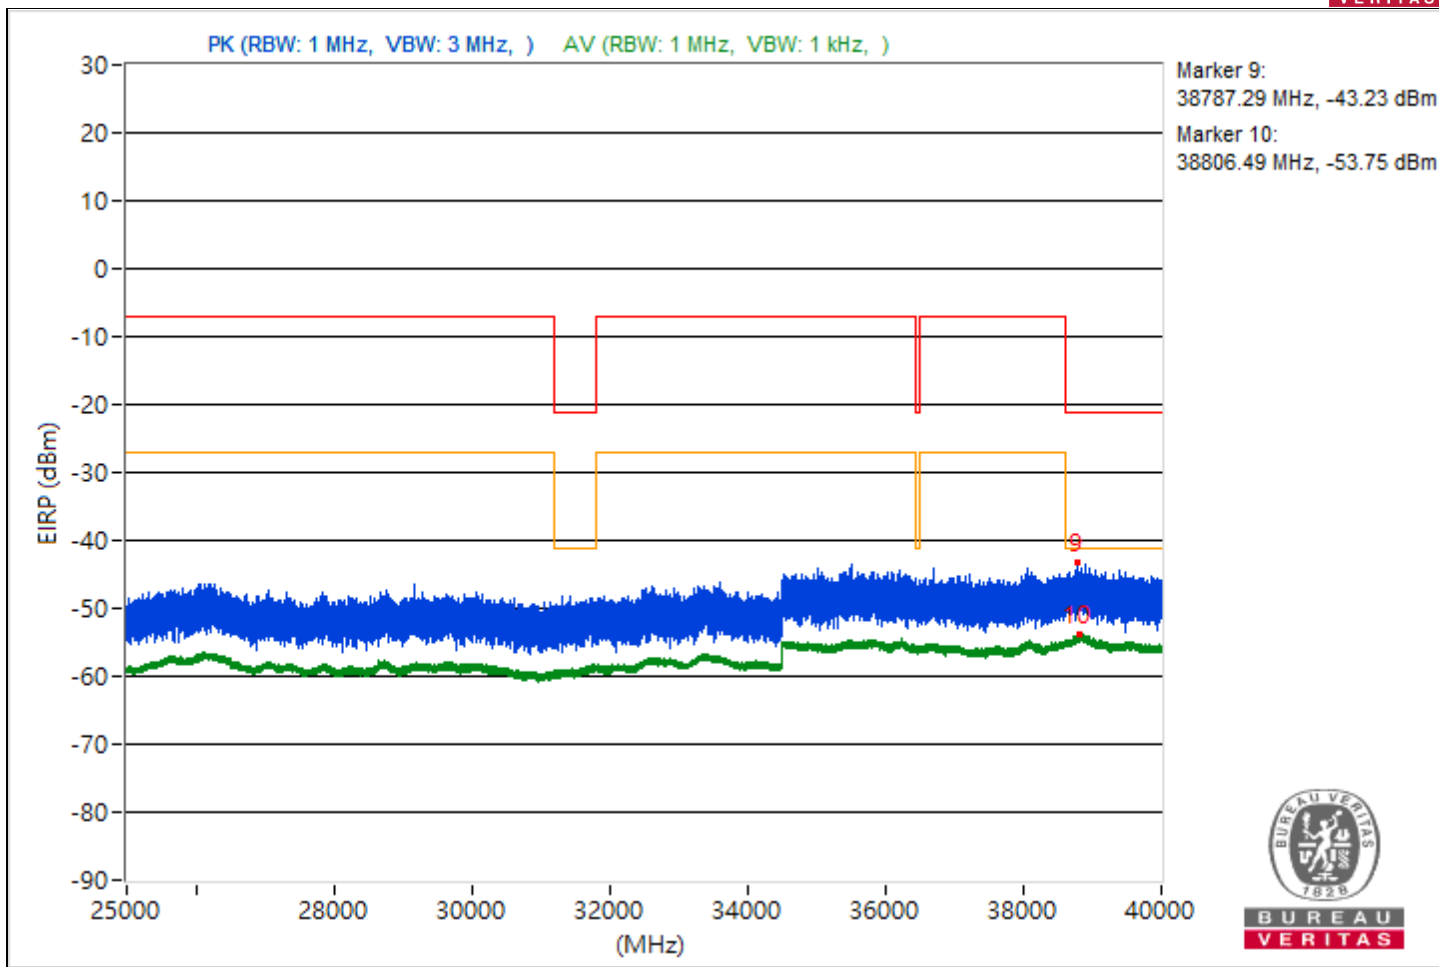





RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5038.07	55.57 PK	74	-18.43	-49.81	-46.17	4.92	-39.69
2	3810.97	45.85 AV	54	-8.15	-57.24	-57.45	4.92	-49.41
3	15596.27	55.56 PK	74	-18.44	-45.48	-52.1	4.92	-39.7
4	14477.07	44.57 AV	54	-9.43	-59.02	-58.26	4.92	-50.69
5	19880	56.87 PK	74	-17.13	-44.22	-50.56	4.92	-38.39
6	21396.3	46.72 AV	54	-7.28	-56.27	-56.67	4.92	-48.54
7	23839.7	58.62 PK	74	-15.38	-43.03	-46.99	4.92	-36.64
8	23639.8	47.77 AV	54	-6.23	-55.93	-54.96	4.92	-47.49
9	39449.6	51.06 PK	74	-22.94	-49.9	-56.92	4.92	-44.2
10	38815.29	41.31 AV	54	-12.69	-62.17	-61.61	4.92	-53.95

Note: Margin value = Emission Level - Limit value

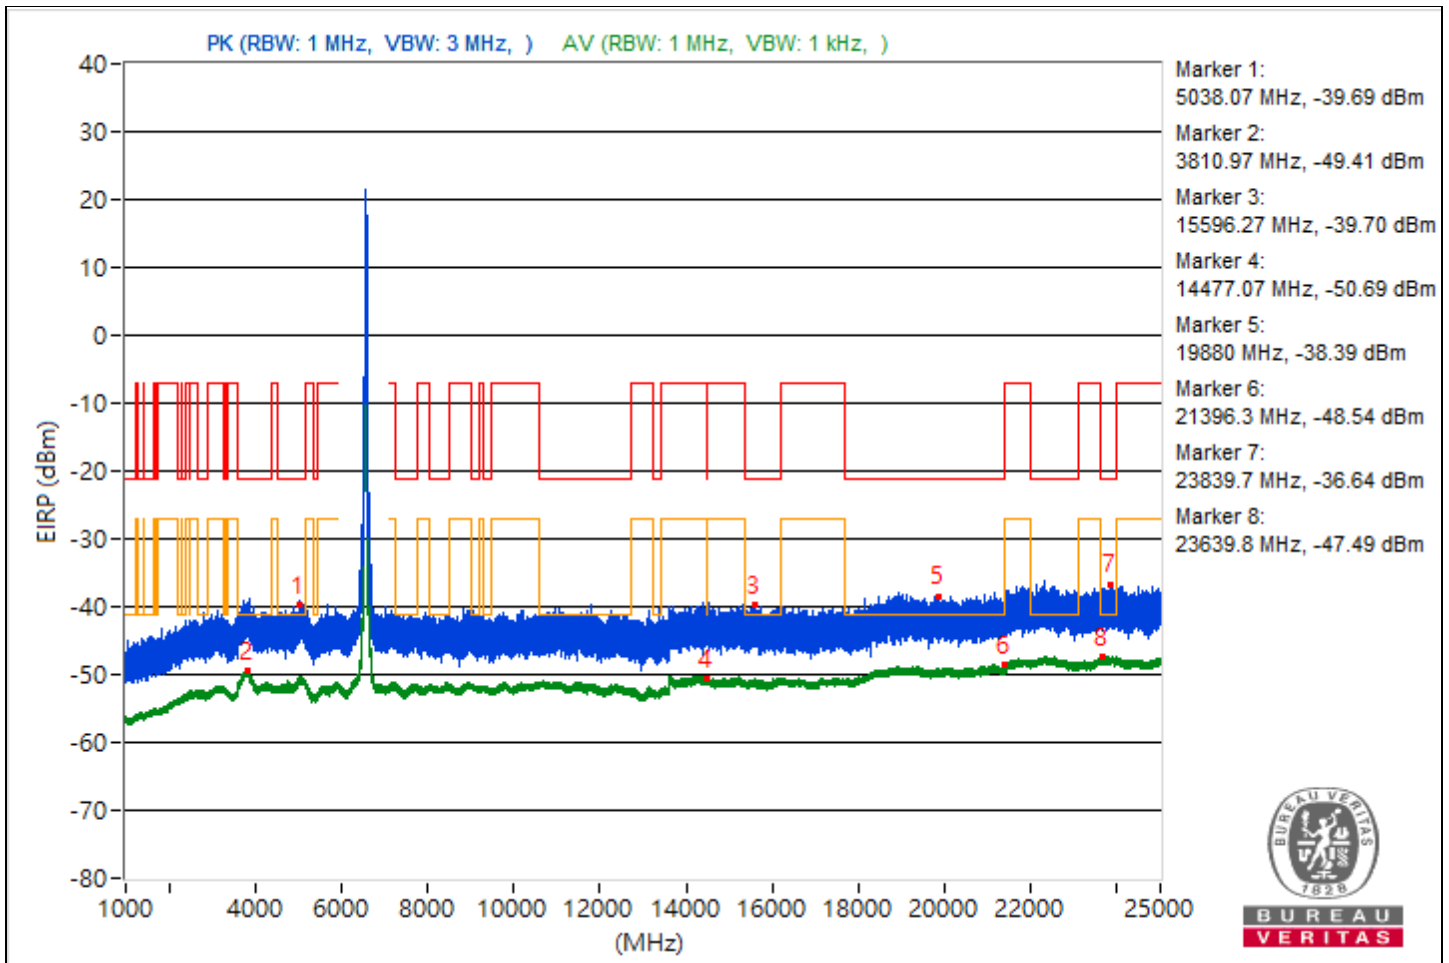

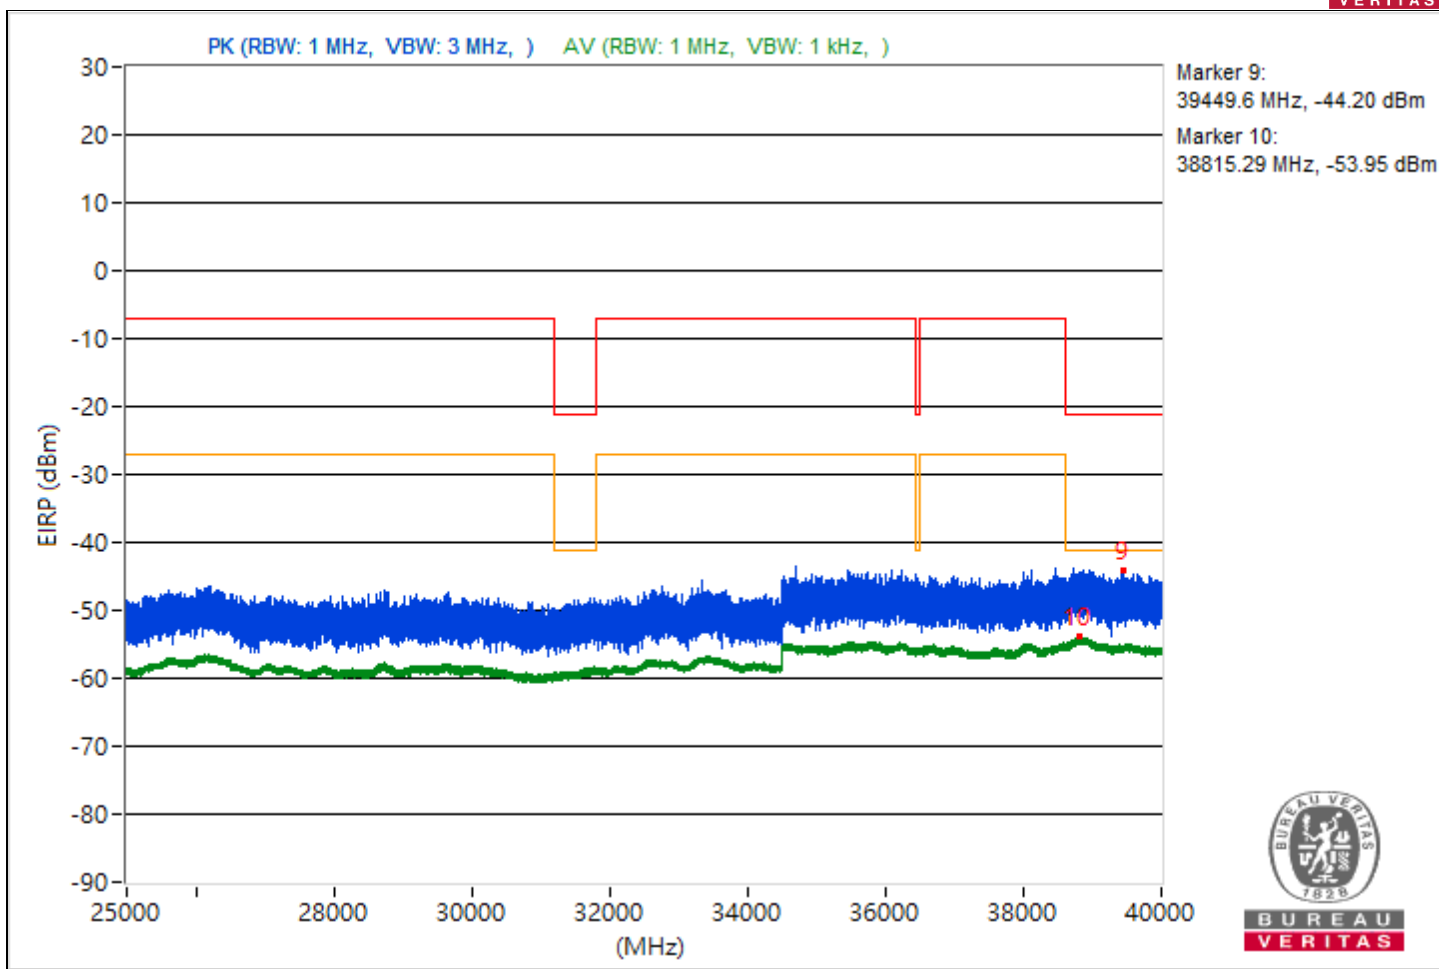





RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.08	56.87 PK	74	-17.13	-48.78	-44.76	4.92	-38.39
2	3784.06	45.59 AV	54	-8.41	-57.15	-58.11	4.92	-49.67
3	9036.18	55.28 PK	74	-18.72	-45.65	-52.89	4.92	-39.98
4	14486.84	44.52 AV	54	-9.48	-58.39	-58.96	4.92	-50.74
5	20344.5	57.14 PK	74	-16.86	-51.39	-43.72	4.92	-38.12
6	21151.6	46.69 AV	54	-7.31	-56.17	-56.86	4.92	-48.57
7	22317.2	58.85 PK	74	-15.15	-47.03	-42.69	4.92	-36.41
8	23664.4	47.81 AV	54	-6.19	-55.76	-55.03	4.92	-47.45
9	38899.91	50.73 PK	74	-23.27	-50.65	-55.61	4.92	-44.53
10	38828.53	41.34 AV	54	-12.66	-62.19	-61.53	4.92	-53.92

Note: Margin value = Emission Level - Limit value

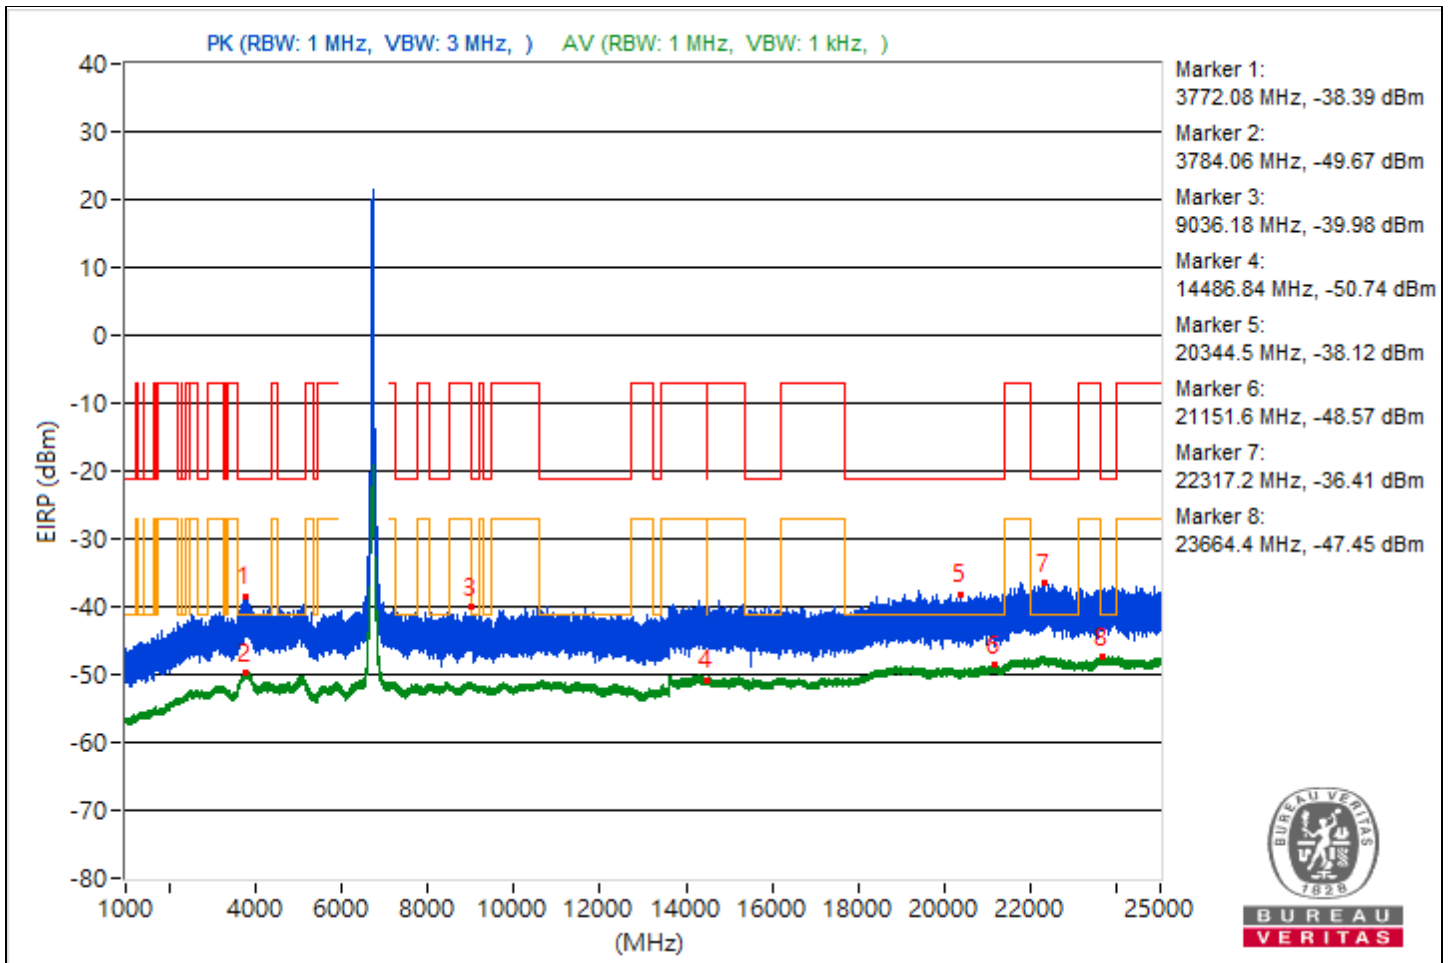

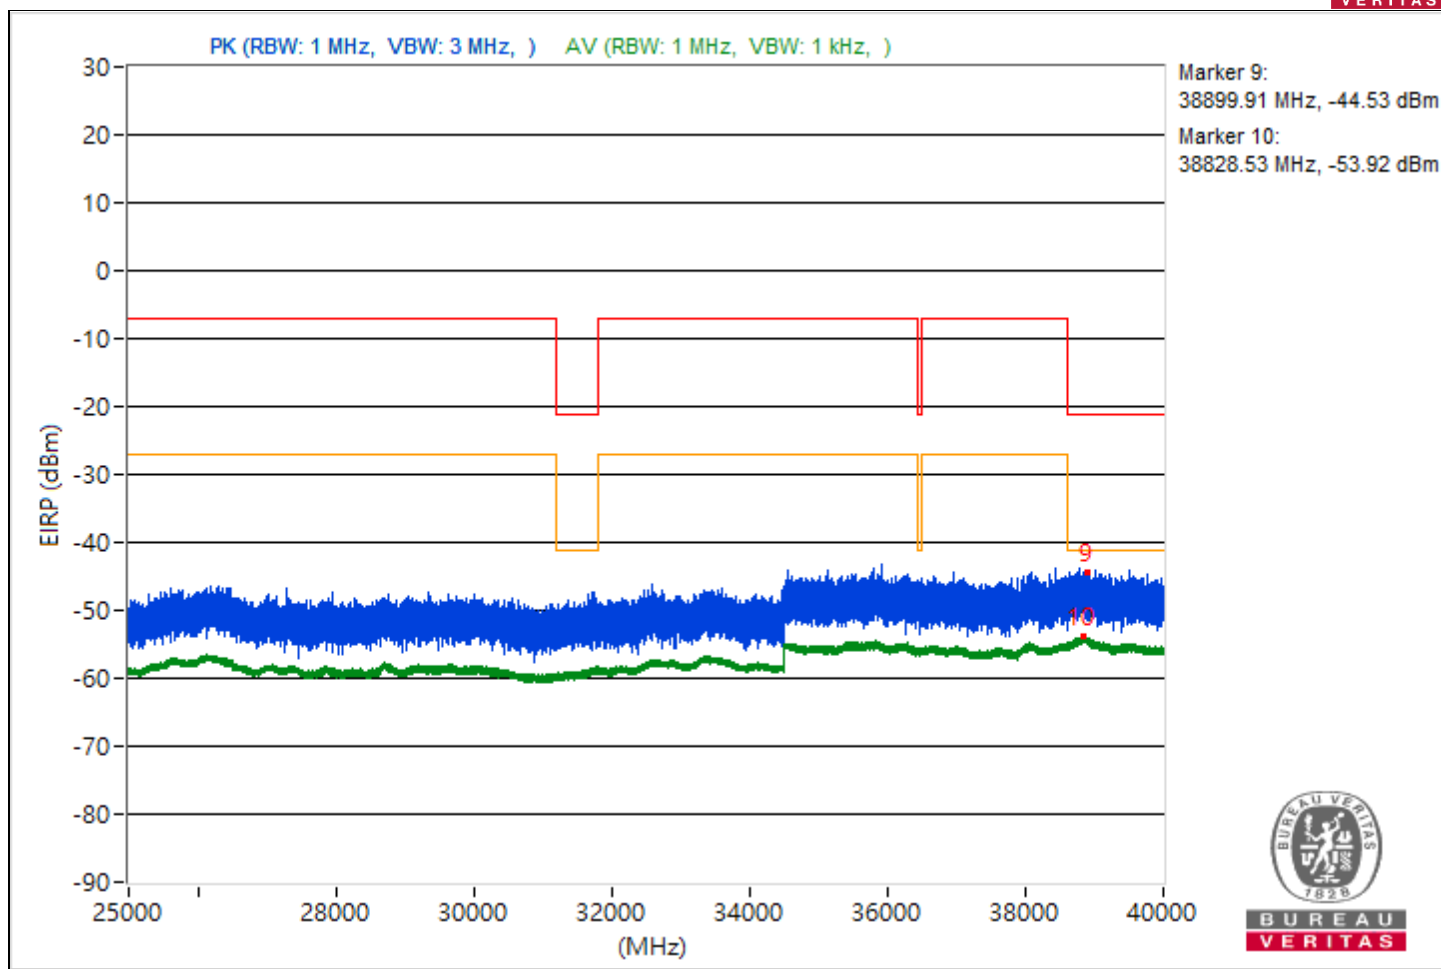





RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3762.67	56.67 PK	74	-17.33	-44.21	-51.77	4.92	-38.59
2	3789.5	45.81 AV	54	-8.19	-57.65	-57.13	4.92	-49.45
3	15692.53	55.64 PK	74	-18.36	-46.28	-49.34	4.92	-39.62
4	14473.51	44.76 AV	54	-9.24	-58.28	-58.58	4.92	-50.5
5	19009.5	57.4 PK	74	-16.6	-43.99	-48.92	4.92	-37.86
6	21109.6	46.55 AV	54	-7.45	-56.99	-56.32	4.92	-48.71
7	22158.1	57.95 PK	74	-16.05	-43.28	-48.91	4.92	-37.31
8	23645	47.89 AV	54	-6.11	-55.55	-55.07	4.92	-47.37
9	38849.16	52.02 PK	74	-21.98	-49.18	-54.95	4.92	-43.24
10	38853.78	41.51 AV	54	-12.49	-61.96	-61.42	4.92	-53.75

Note: Margin value = Emission Level - Limit value

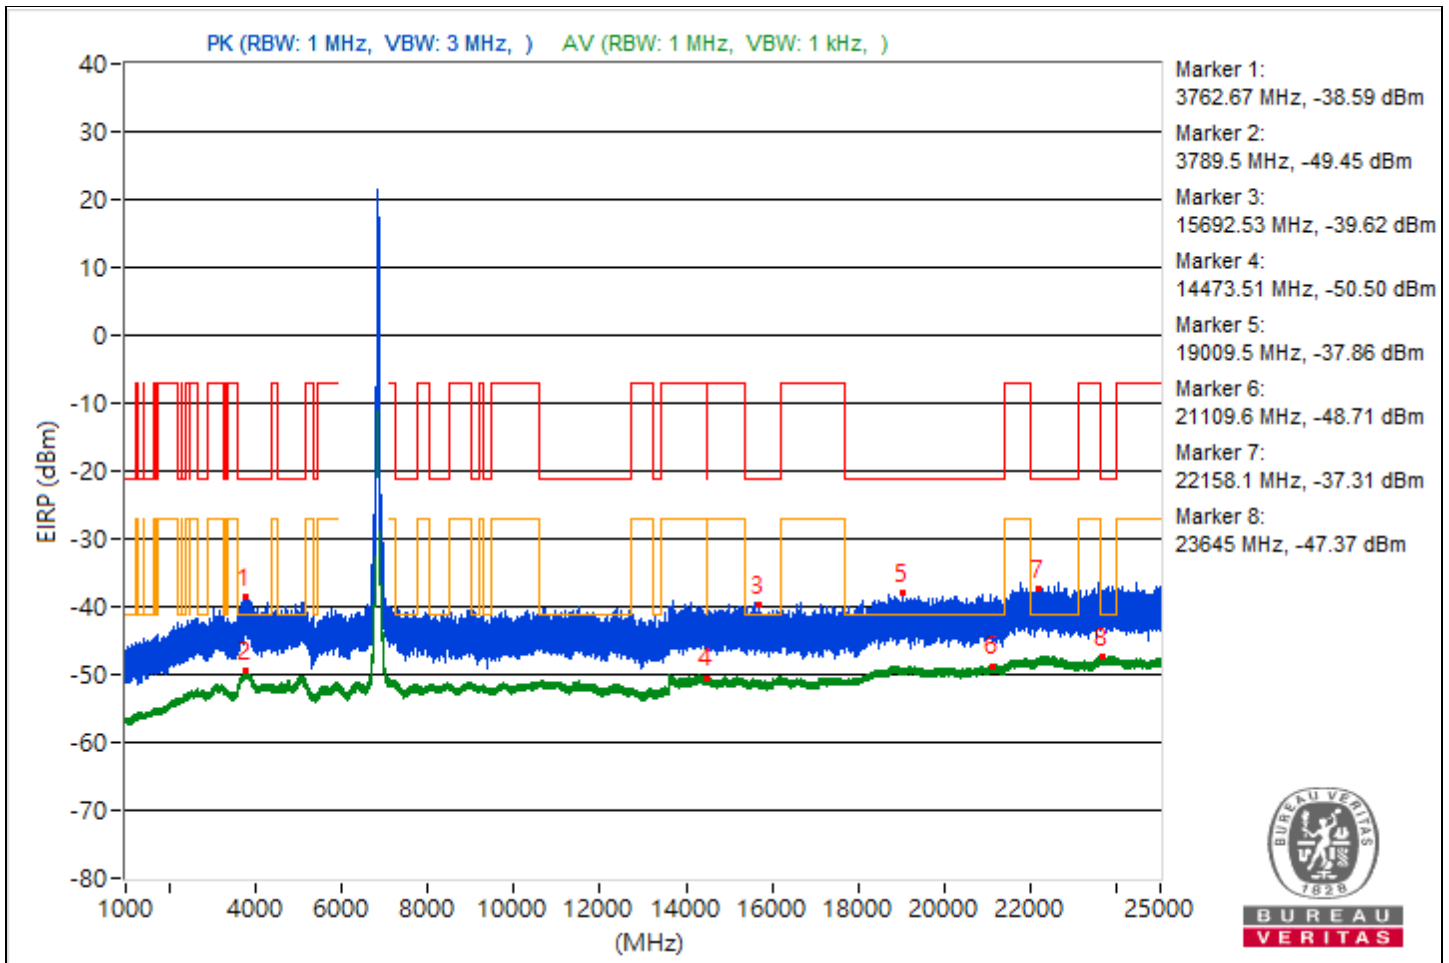

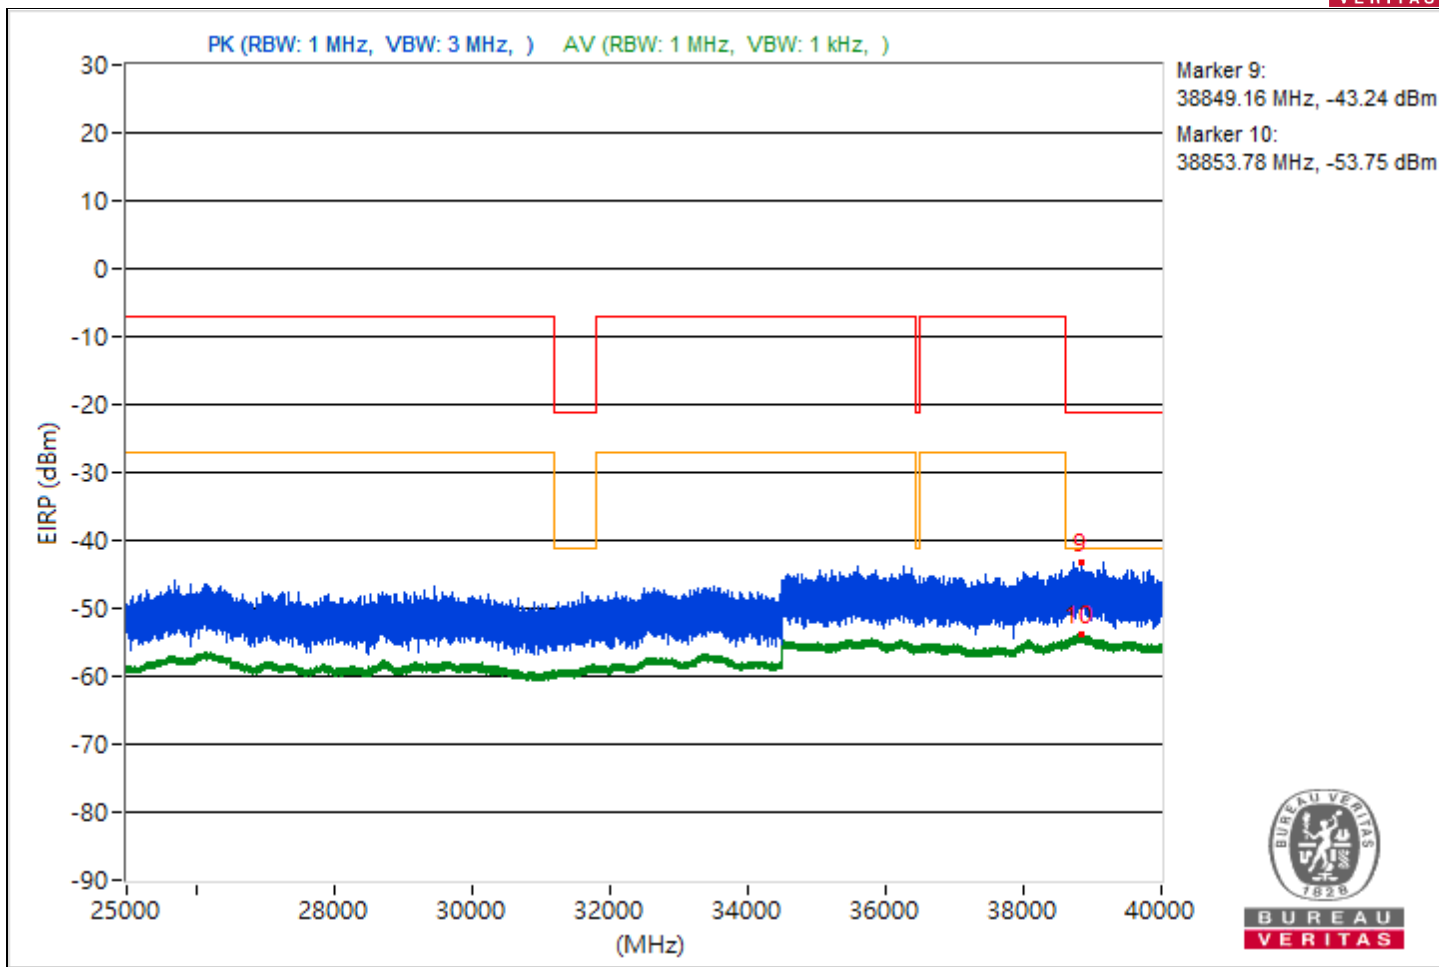





RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5008.74	55.96 PK	74	-18.04	-50.26	-45.47	4.92	-39.3
2	3833.37	45.57 AV	54	-8.43	-57.42	-57.83	4.92	-49.69
3	15515.73	55.02 PK	74	-18.98	-45.93	-53.07	4.92	-40.24
4	14474.49	44.77 AV	54	-9.23	-58.48	-58.35	4.92	-50.49
5	21369.8	57.23 PK	74	-16.77	-44.07	-49.39	4.92	-38.03
6	21126	46.55 AV	54	-7.45	-56.28	-57.04	4.92	-48.71
7	23924.1	58.15 PK	74	-15.85	-48.98	-43	4.92	-37.11
8	23738.9	47.84 AV	54	-6.16	-55.92	-54.85	4.92	-47.42
9	39025.78	51.54 PK	74	-22.46	-49.87	-54.7	4.92	-43.72
10	38801.96	41.38 AV	54	-12.62	-62.3	-61.37	4.92	-53.88

Note: Margin value = Emission Level - Limit value

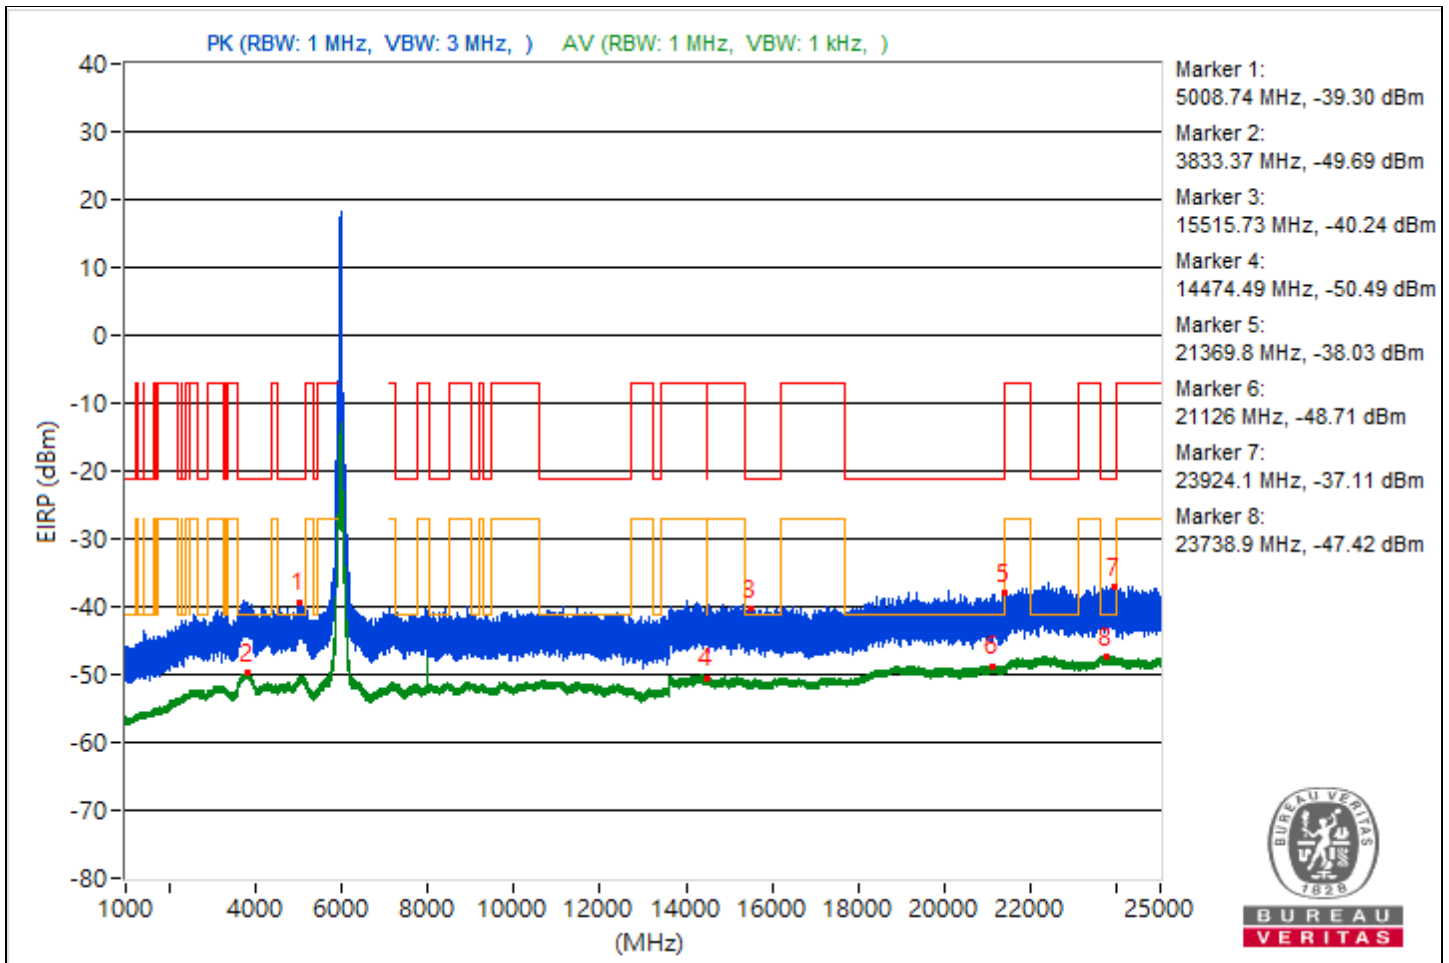

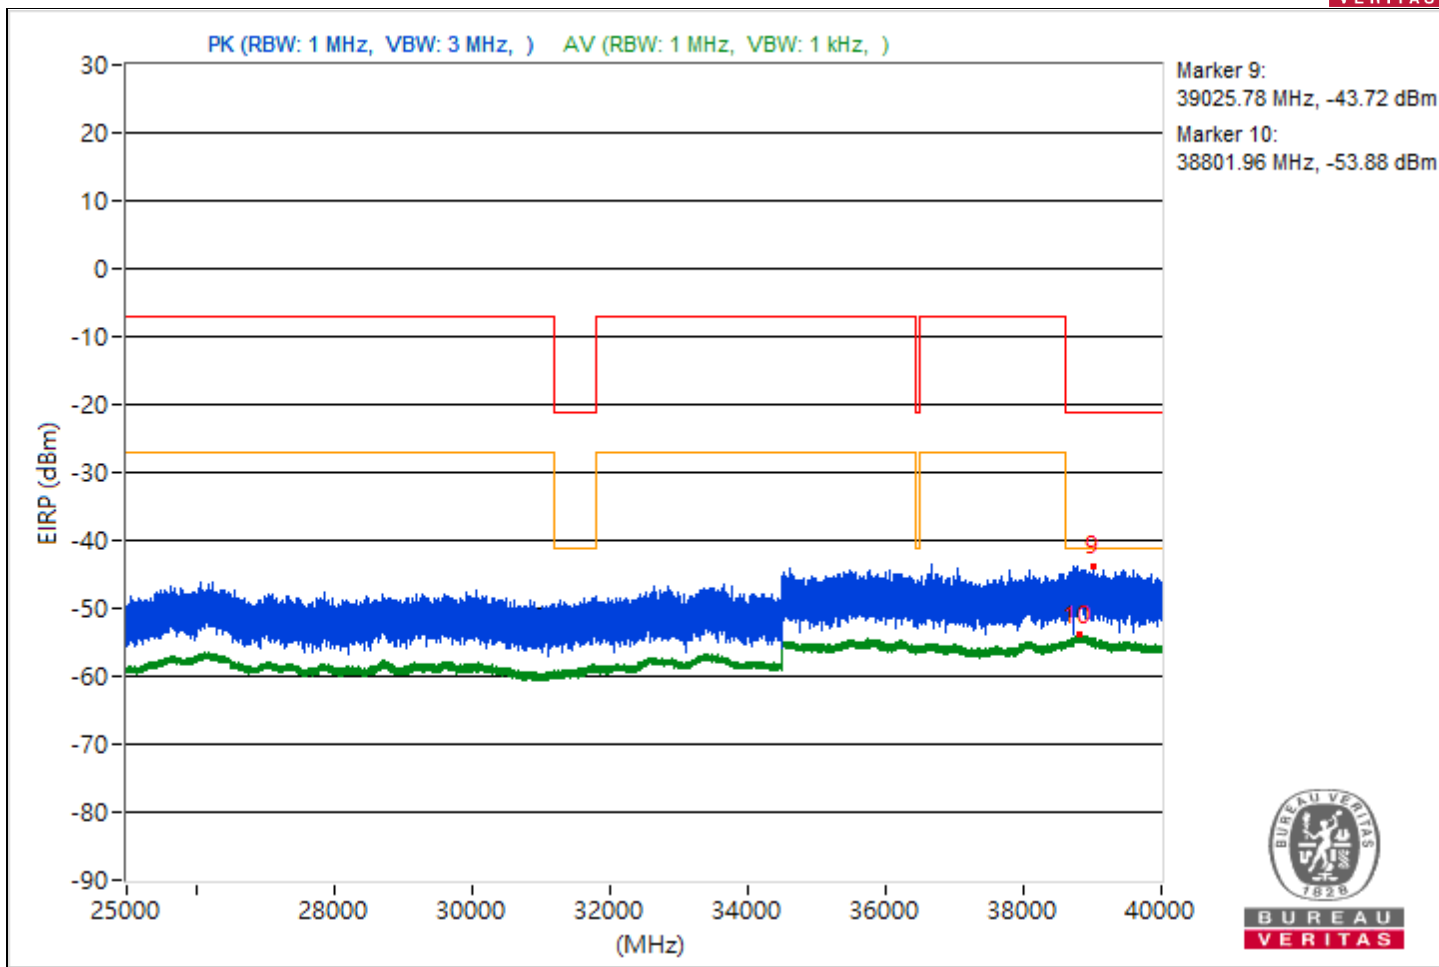





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.53	55.66 PK	74	-18.34	-45.37	-52.03	4.92	-39.6
2	3813.53	45.83 AV	54	-8.17	-57.77	-56.98	4.92	-49.43
3	12196.8	54.84 PK	74	-19.16	-53.86	-46	4.92	-40.42
4	8193.33	46.24 AV	54	-7.76	-56.99	-56.91	4.92	-49.02
5	19966.7	57.37 PK	74	-16.63	-48.38	-44.22	4.92	-37.89
6	21138.5	46.52 AV	54	-7.48	-56.33	-57.04	4.92	-48.74
7	22093.3	58 PK	74	-16	-43.25	-48.78	4.92	-37.26
8	23749.5	47.79 AV	54	-6.21	-55.89	-54.96	4.92	-47.47
9	38750.13	51.6 PK	74	-22.4	-49.91	-54.37	4.92	-43.66
10	38815.29	41.35 AV	54	-12.65	-61.57	-62.14	4.92	-53.91

Note: Margin value = Emission Level - Limit value

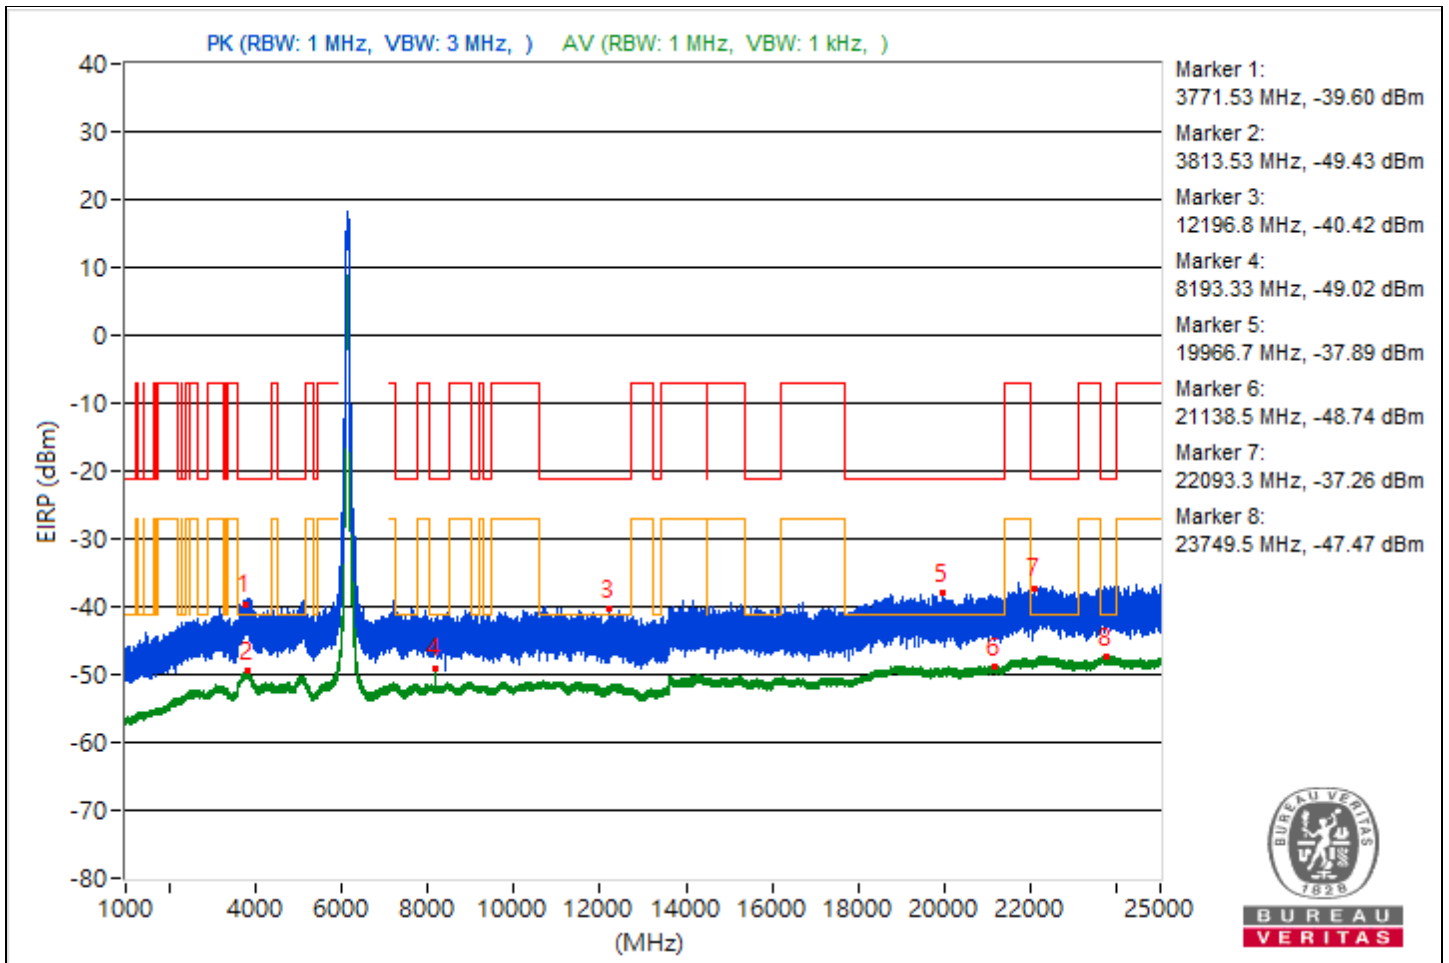

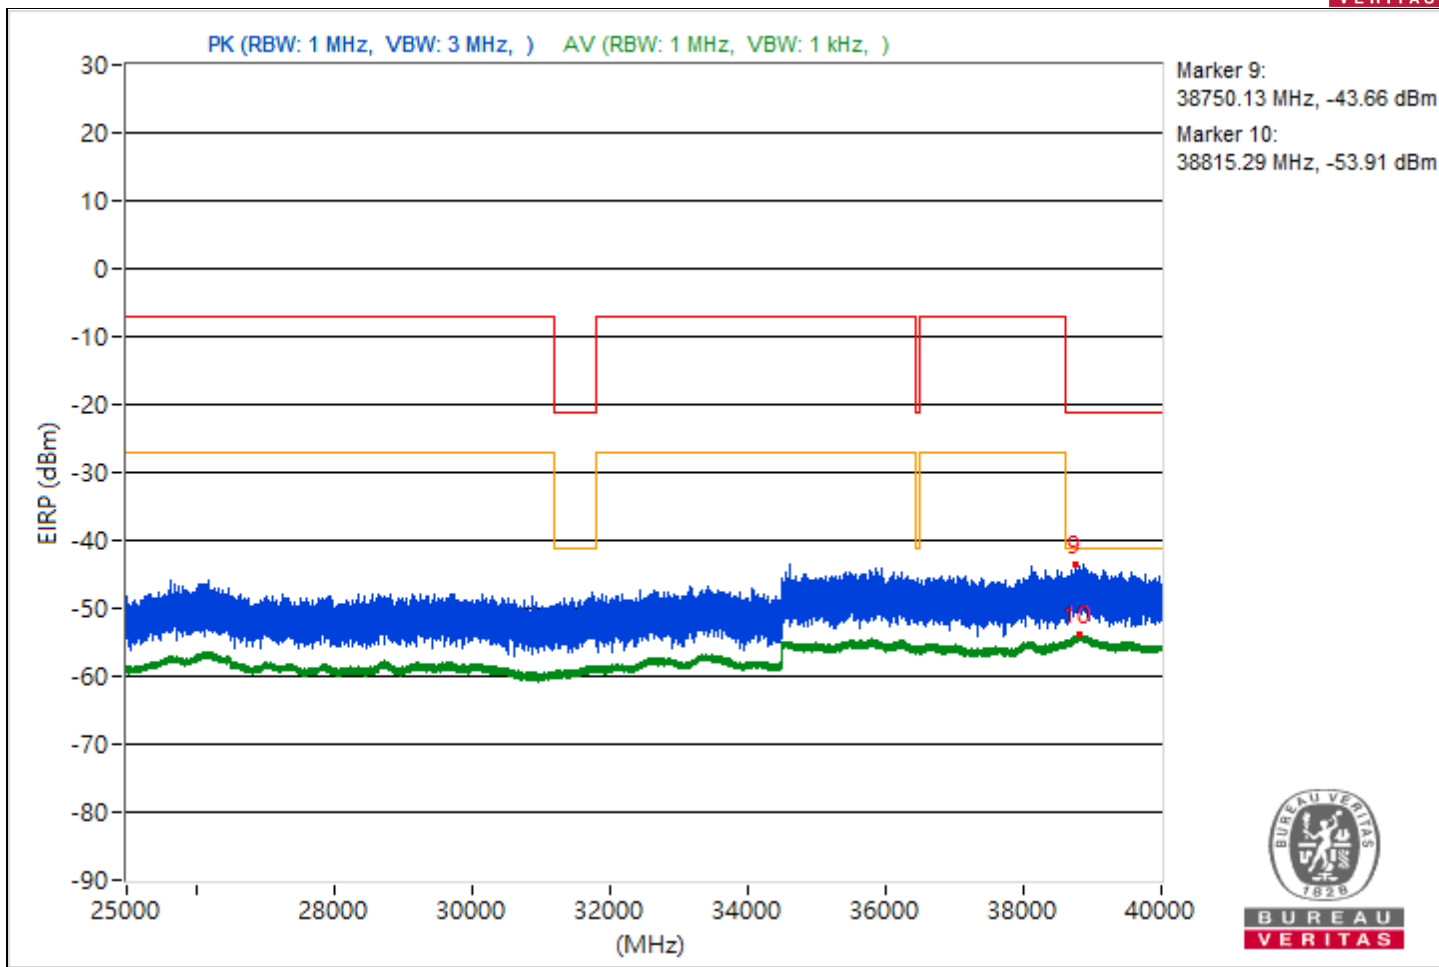





RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3747.58	55.89 PK	74	-18.11	-45.9	-49.36	4.92	-39.37
2	3792.46	45.52 AV	54	-8.48	-57.29	-58.08	4.92	-49.74
3	15599.56	55.32 PK	74	-18.68	-50.47	-46.25	4.92	-39.94
4	14489.16	44.72 AV	54	-9.28	-58.77	-58.18	4.92	-50.54
5	21174.3	56.55 PK	74	-17.45	-49.18	-45.05	4.92	-38.71
6	21119.4	46.6 AV	54	-7.4	-56.86	-56.34	4.92	-48.66
7	23713.9	58.42 PK	74	-15.58	-42.91	-48.09	4.92	-36.84
8	22246.5	47.75 AV	54	-6.25	-54.86	-56.12	4.92	-47.51
9	39002.76	51.32 PK	74	-22.68	-49.87	-55.72	4.92	-43.94
10	38805.33	41.25 AV	54	-12.75	-62.4	-61.52	4.92	-54.01

Note: Margin value = Emission Level - Limit value

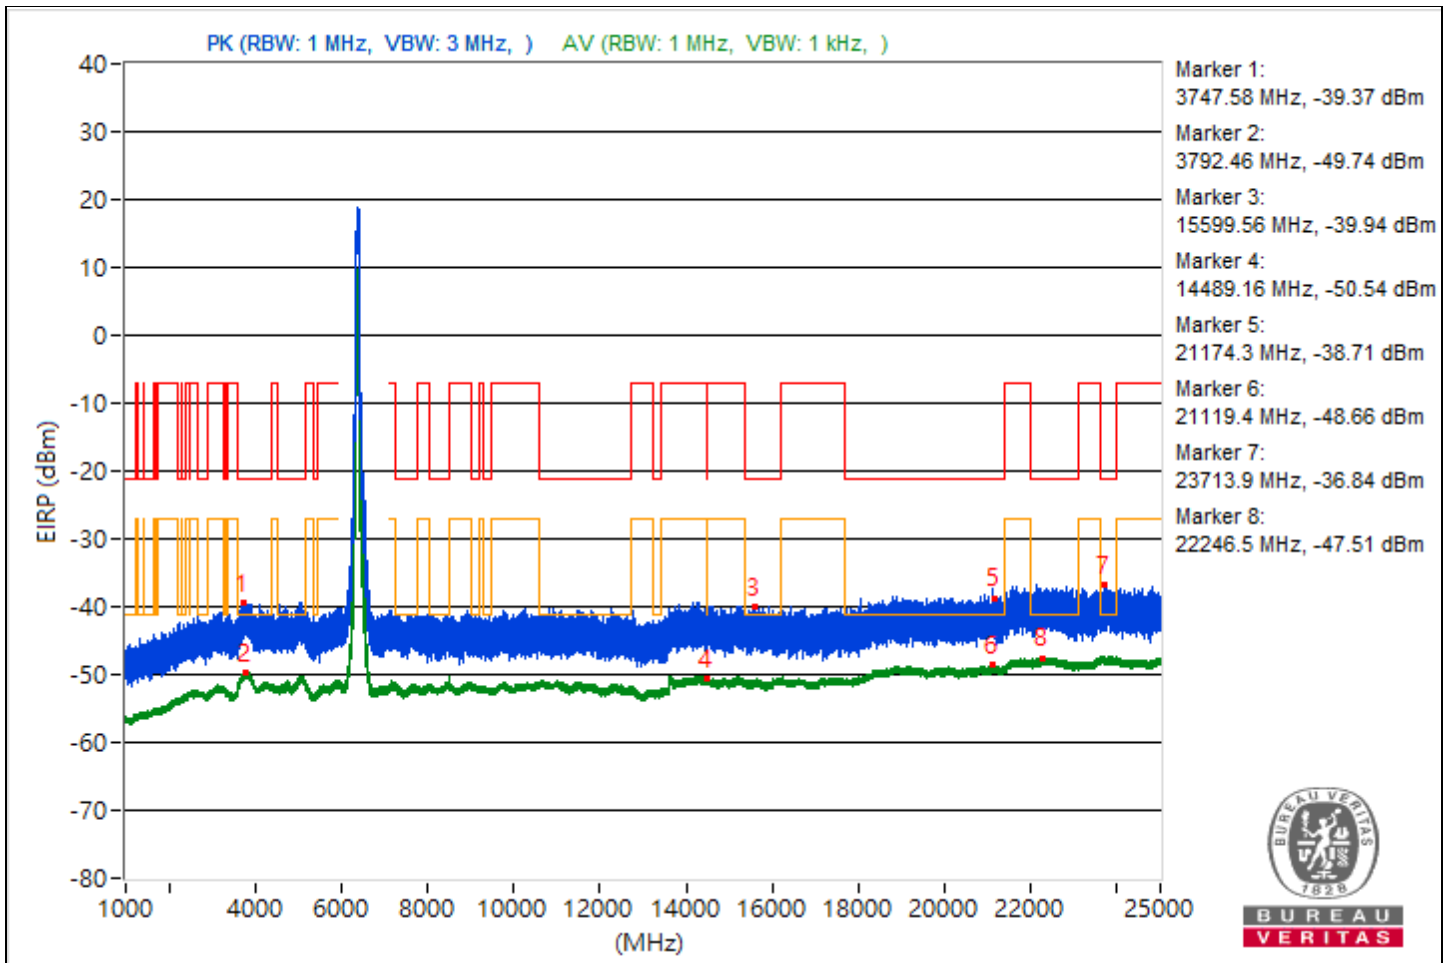

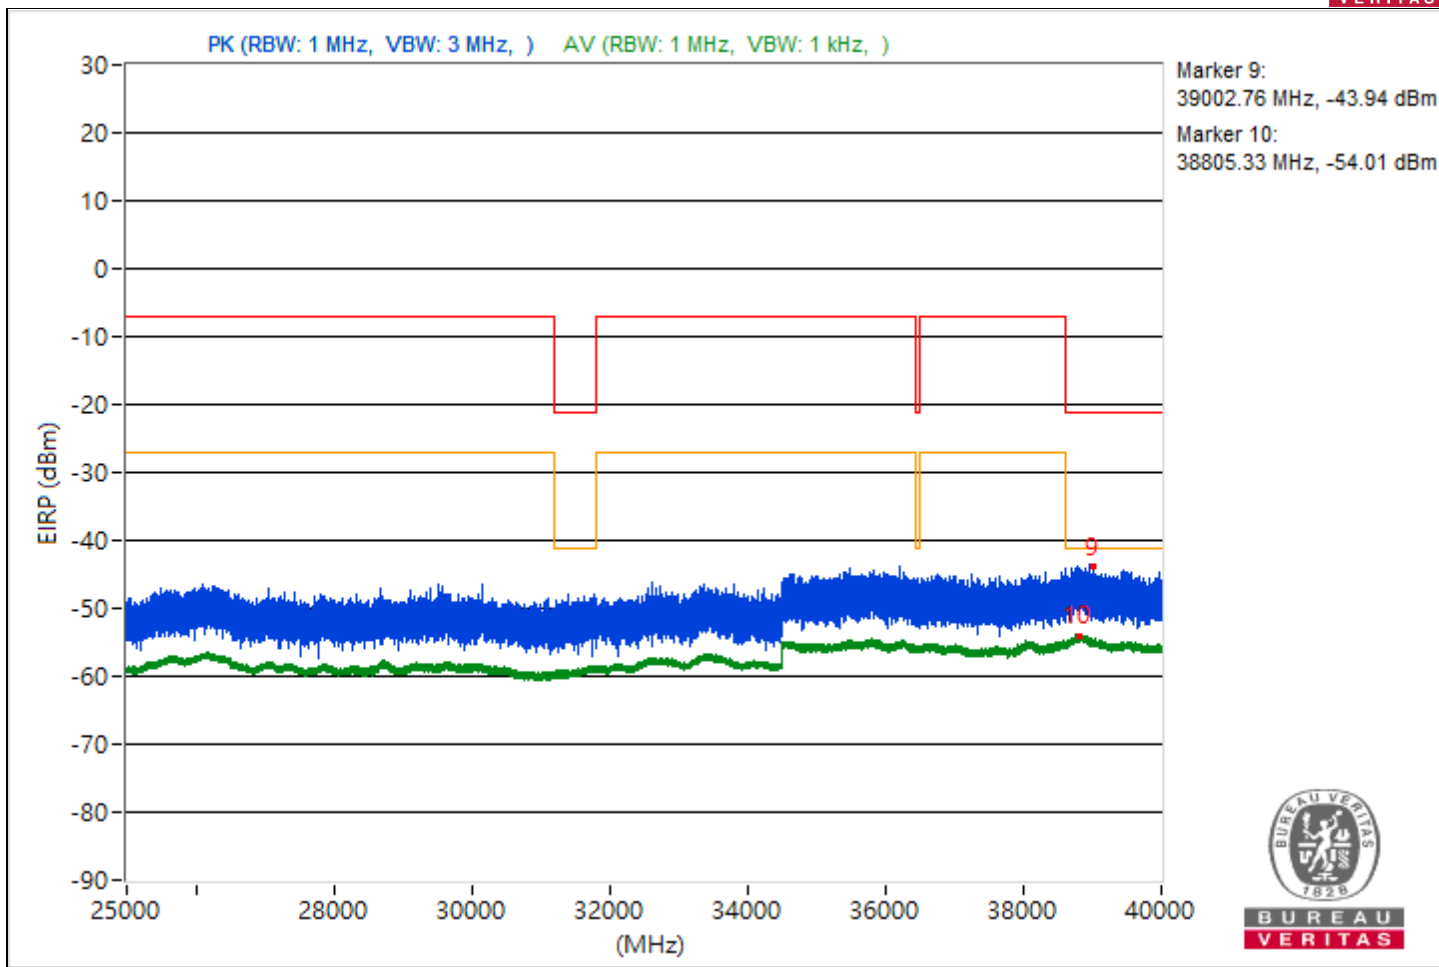





RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.82	56.48 PK	74	-17.52	-44.64	-50.78	4.92	-38.78
2	3811.74	45.86 AV	54	-8.14	-57.57	-57.11	4.92	-49.4
3	10709.42	55.37 PK	74	-18.63	-46.41	-49.92	4.92	-39.89
4	14495.38	44.64 AV	54	-9.36	-58.89	-58.24	4.92	-50.62
5	20920.1	56.89 PK	74	-17.11	-43.94	-51.89	4.92	-38.37
6	21084	46.59 AV	54	-7.41	-56.96	-56.26	4.92	-48.67
7	22157.2	58.65 PK	74	-15.35	-42.54	-48.38	4.92	-36.61
8	23673.2	48.14 AV	54	-5.86	-54.91	-55.19	4.92	-47.12
9	38788.8	51.76 PK	74	-22.24	-50.12	-53.29	4.92	-43.5
10	38790.84	41.27 AV	54	-12.73	-62.37	-61.5	4.92	-53.99

Note: Margin value = Emission Level - Limit value

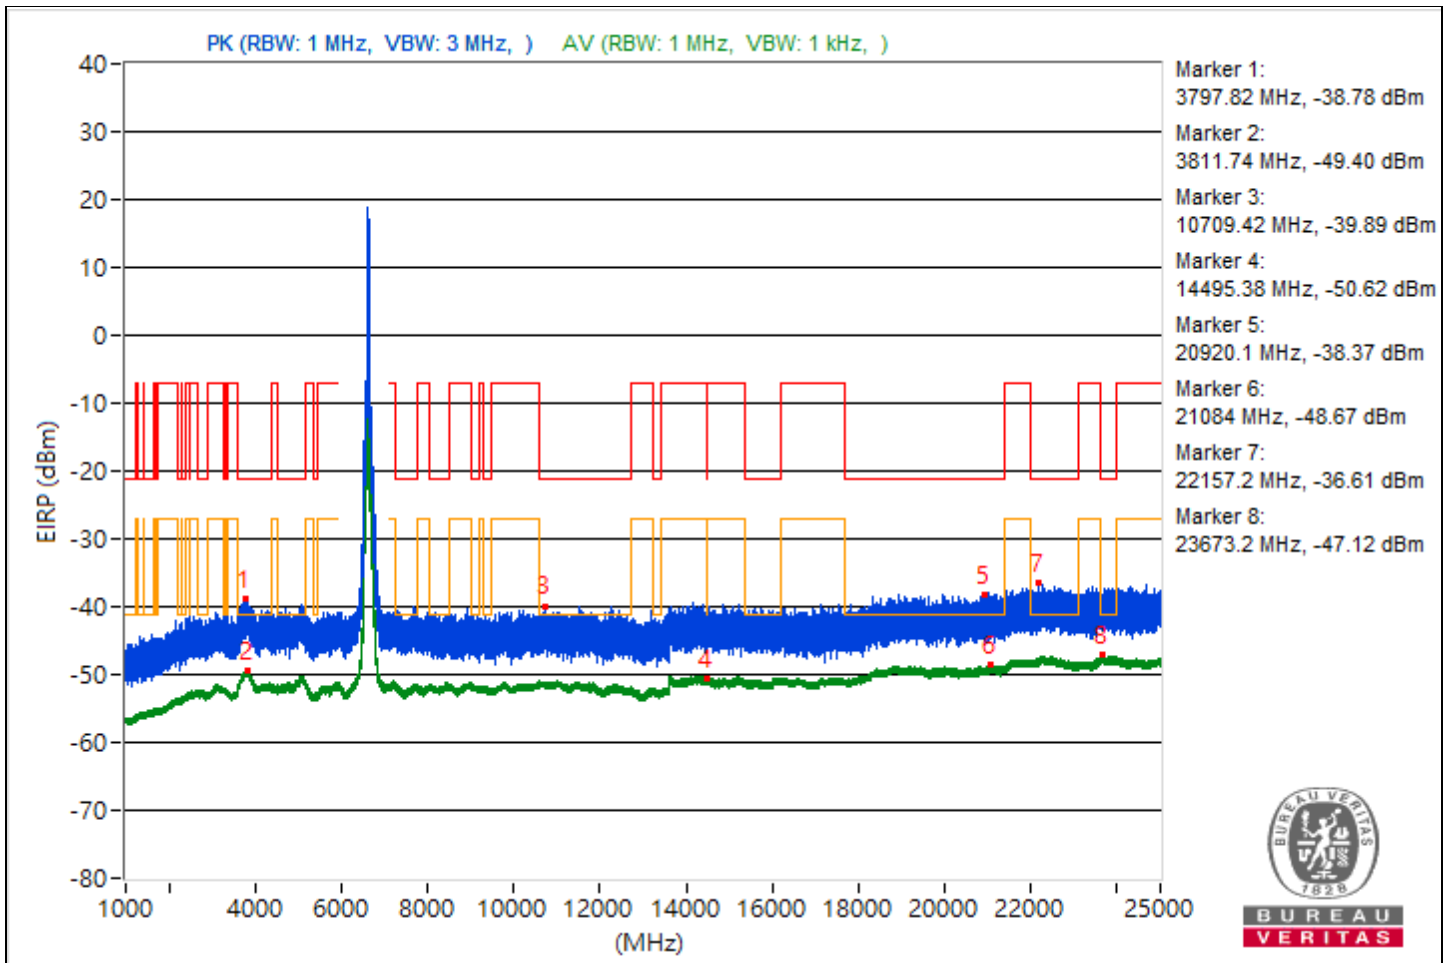

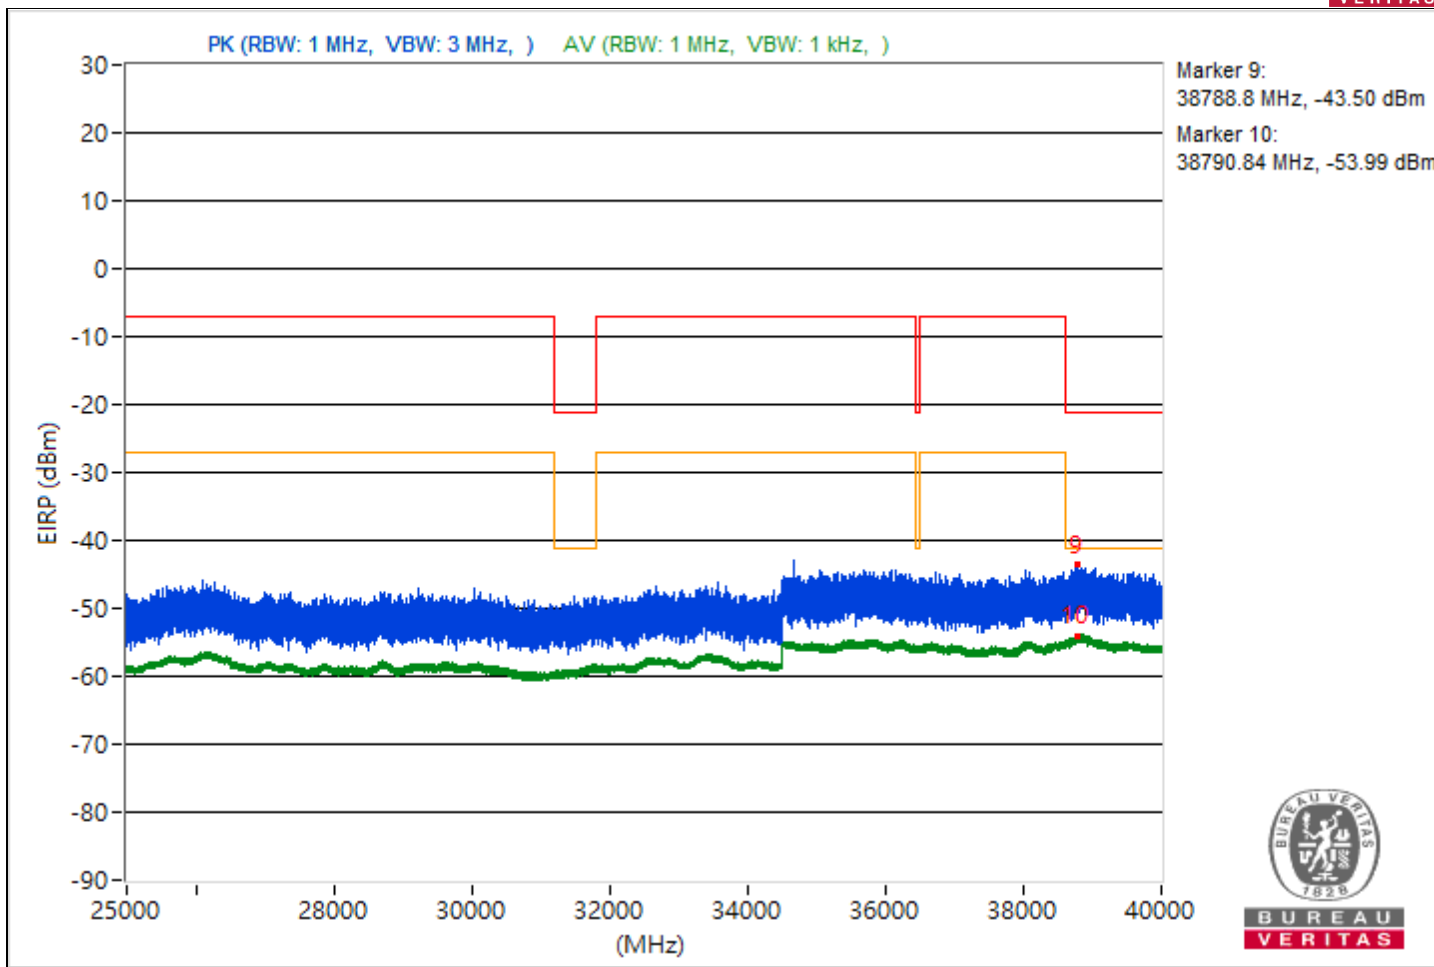





RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.37	56.18 PK	74	-17.82	-44.74	-52.01	4.92	-39.08
2	3807.08	45.58 AV	54	-8.42	-57.26	-57.99	4.92	-49.68
3	7260.72	55.85 PK	74	-18.15	-46.3	-48.72	4.92	-39.41
4	14491.29	44.94 AV	54	-9.06	-58.42	-58.08	4.92	-50.32
5	21139.5	58.18 PK	74	-15.82	-51.2	-42.56	4.92	-37.08
6	21135.1	46.71 AV	54	-7.29	-56.75	-56.21	4.92	-48.55
7	23056.7	57.78 PK	74	-16.22	-43.55	-48.74	4.92	-37.48
8	23638.9	47.69 AV	54	-6.31	-55.03	-56.02	4.92	-47.57
9	38845.16	50.81 PK	74	-23.19	-50.62	-55.4	4.92	-44.45
10	38849.07	41.21 AV	54	-12.79	-61.49	-62.53	4.92	-54.05

Note: Margin value = Emission Level - Limit value

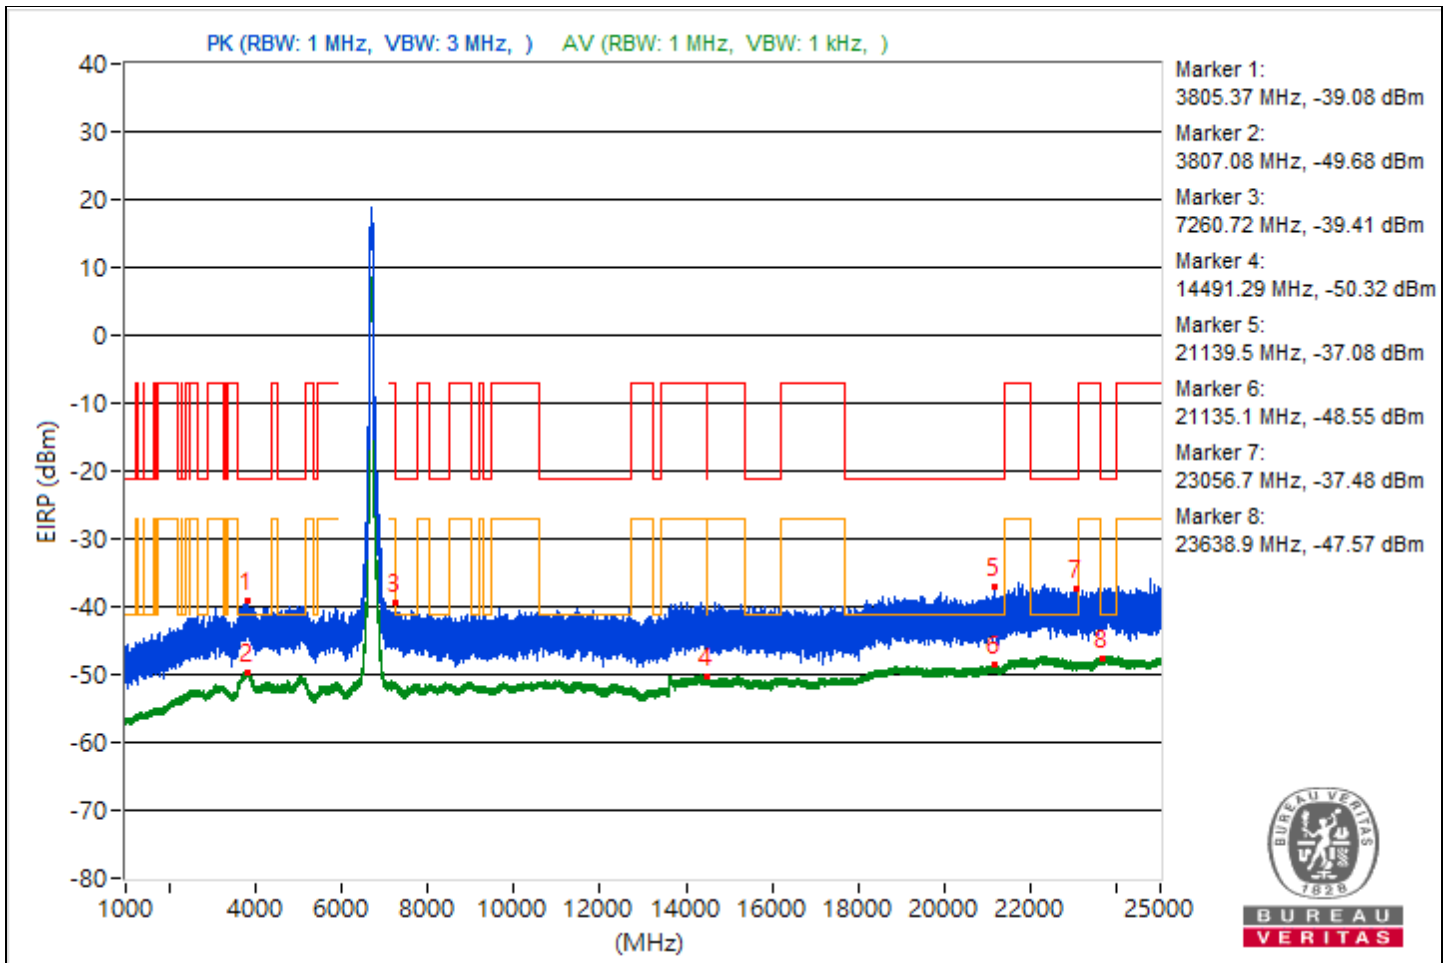

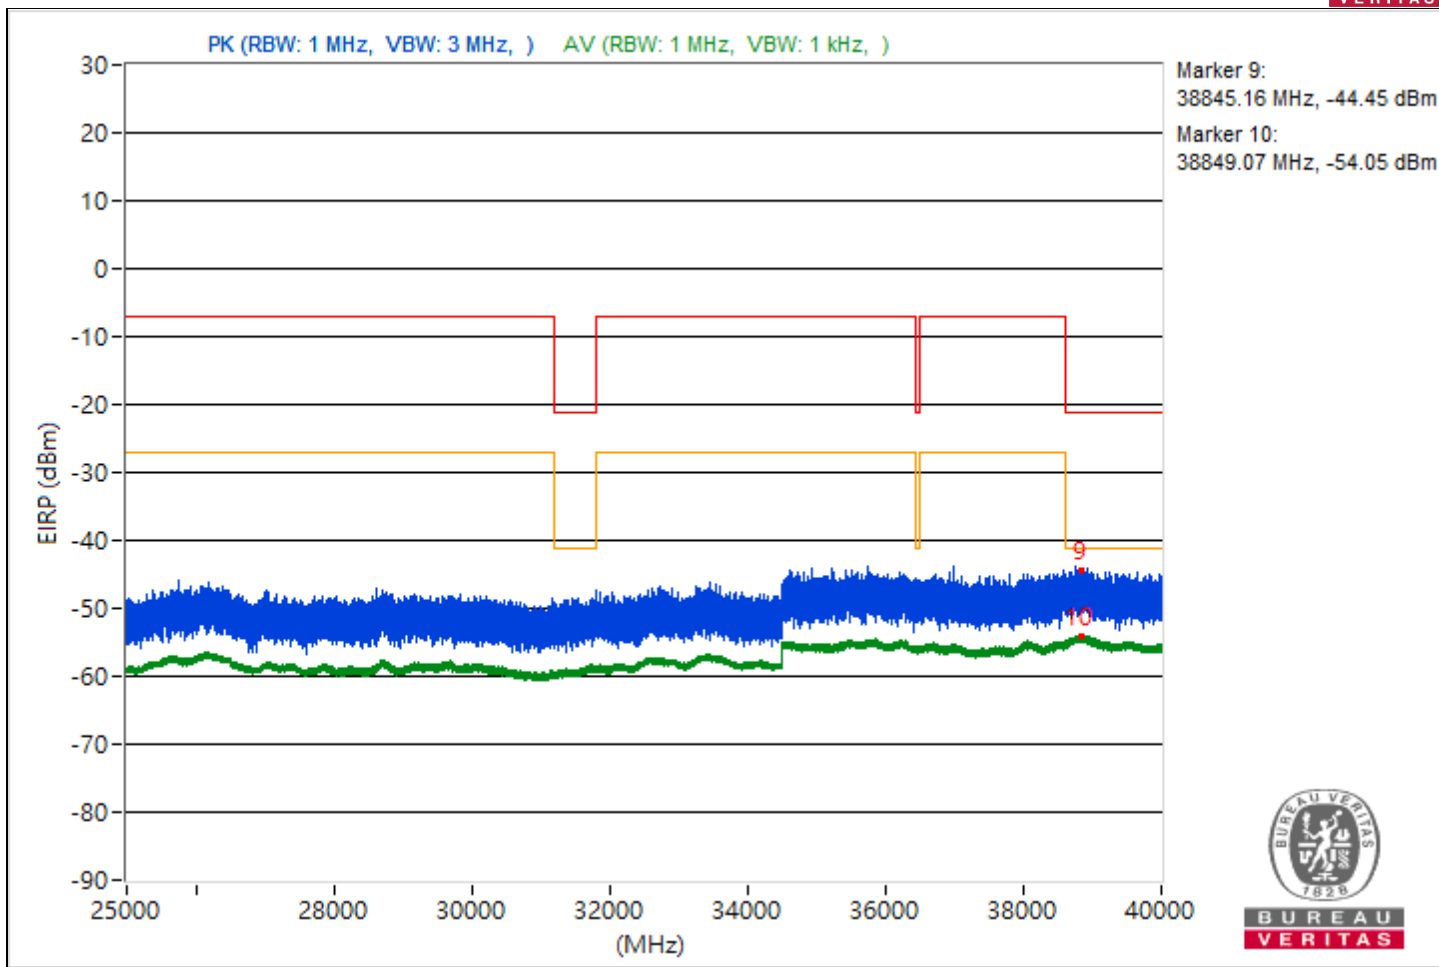





RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.97	55.96 PK	74	-18.04	-45.71	-49.59	4.92	-39.3
2	3808.09	45.72 AV	54	-8.28	-57.23	-57.73	4.92	-49.54
3	11051.47	54.58 PK	74	-19.42	-46.36	-53.51	4.92	-40.68
4	14473.07	44.83 AV	54	-9.17	-58.38	-58.35	4.92	-50.43
5	20805.1	58.13 PK	74	-15.87	-45.66	-44.52	4.92	-37.13
6	21098.6	46.27 AV	54	-7.73	-56.31	-57.62	4.92	-48.99
7	22359.9	58.85 PK	74	-15.15	-42.87	-46.56	4.92	-36.41
8	23760.1	47.88 AV	54	-6.12	-55.66	-55	4.92	-47.38
9	38801.69	51.55 PK	74	-22.45	-49.88	-54.67	4.92	-43.71
10	38809.87	41.49 AV	54	-12.51	-61.93	-61.48	4.92	-53.77

Note: Margin value = Emission Level - Limit value

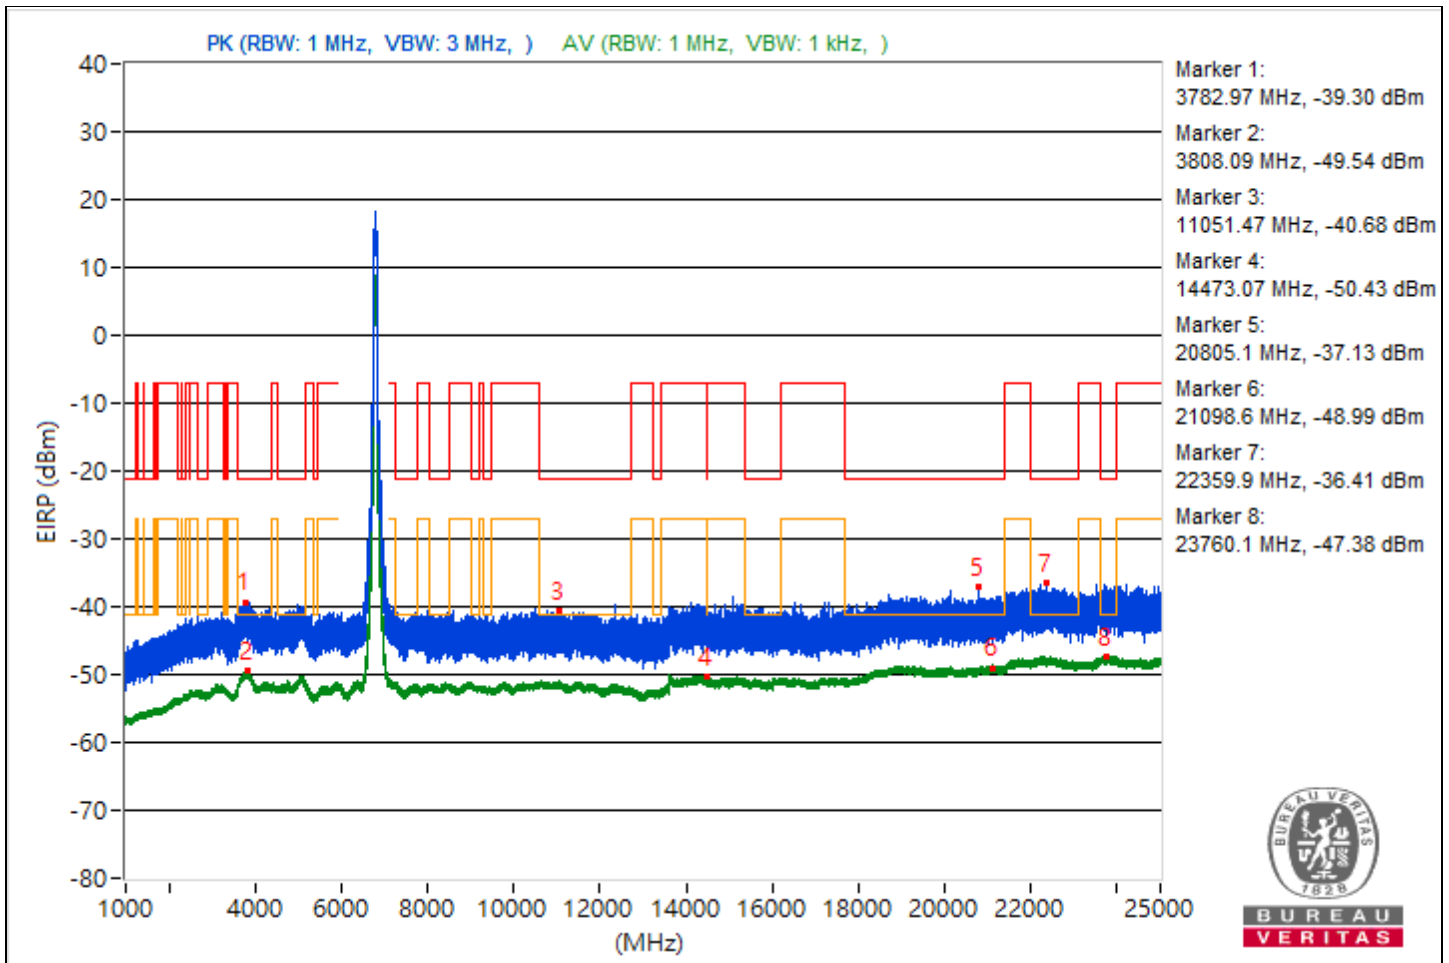

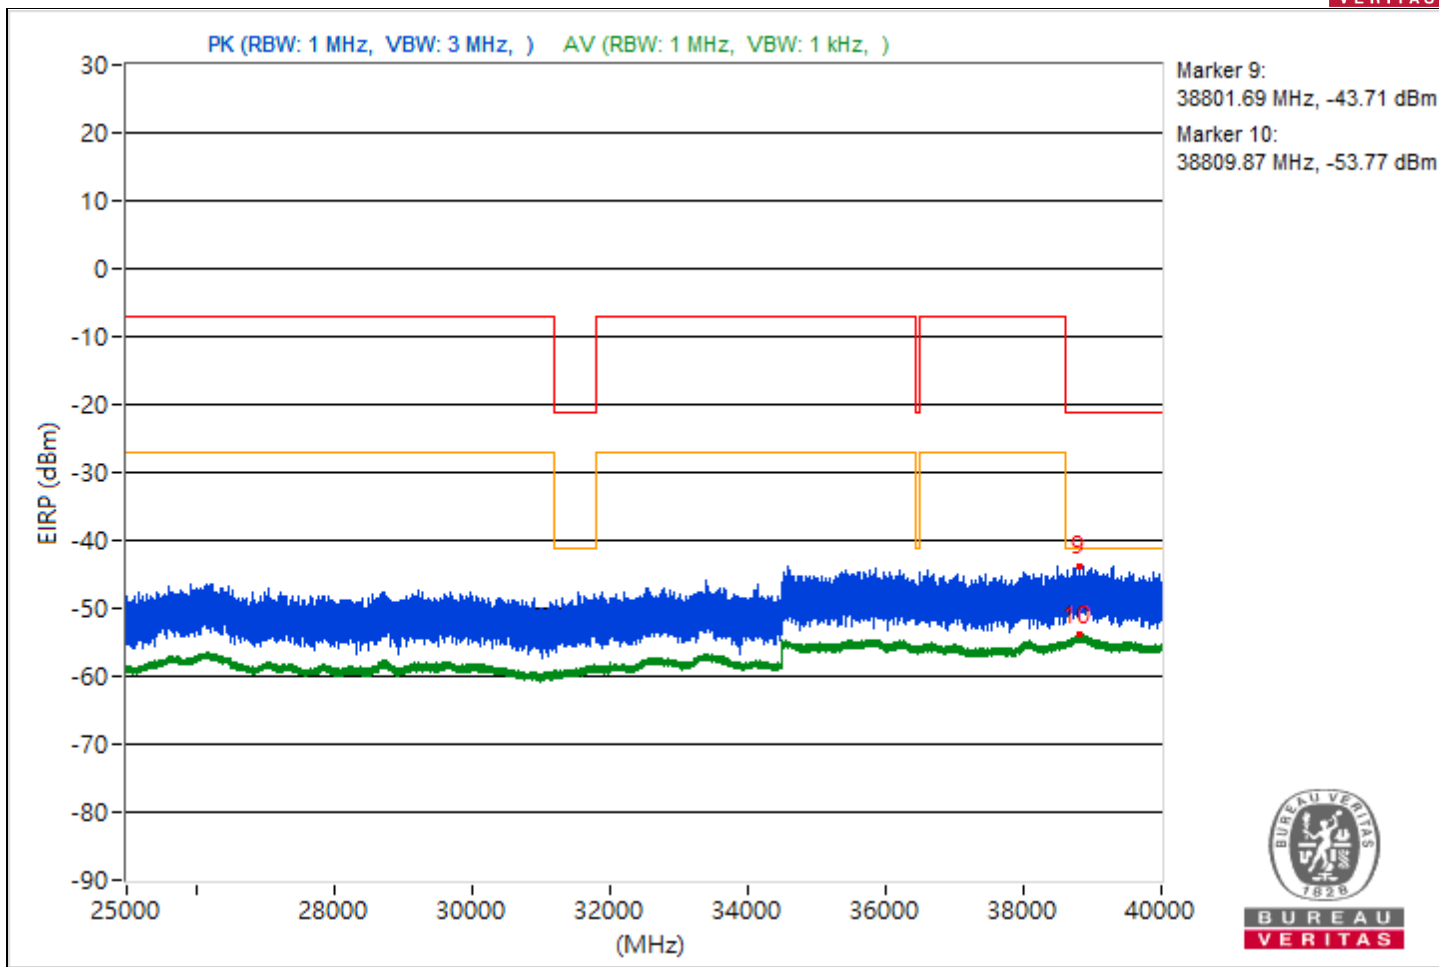



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5870.29	74.11 PK	88.26	-14.15	-34.08	-26.82	4.92	-21.15
2	#5874.41	60.86 AV	68.26	-7.4	-42.4	-42.25	4.92	-34.4
3	15855.64	54.66 PK	74	-19.34	-46.44	-52.7	4.92	-40.6
4	8033.42	48.41 AV	54	-5.59	-54.64	-54.92	4.92	-46.85
5	20127.2	56.87 PK	74	-17.13	-44.63	-49.14	4.92	-38.39
6	21135.4	46.5 AV	54	-7.5	-56.9	-56.5	4.92	-48.76
7	22174.9	58.87 PK	74	-15.13	-43.22	-45.8	4.92	-36.39
8	23809.6	47.75 AV	54	-6.25	-55.87	-55.04	4.92	-47.51
9	38866.22	51.06 PK	74	-22.94	-54.87	-50.46	4.92	-44.2
10	38847.2	41.13 AV	54	-12.87	-61.77	-62.39	4.92	-54.13

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

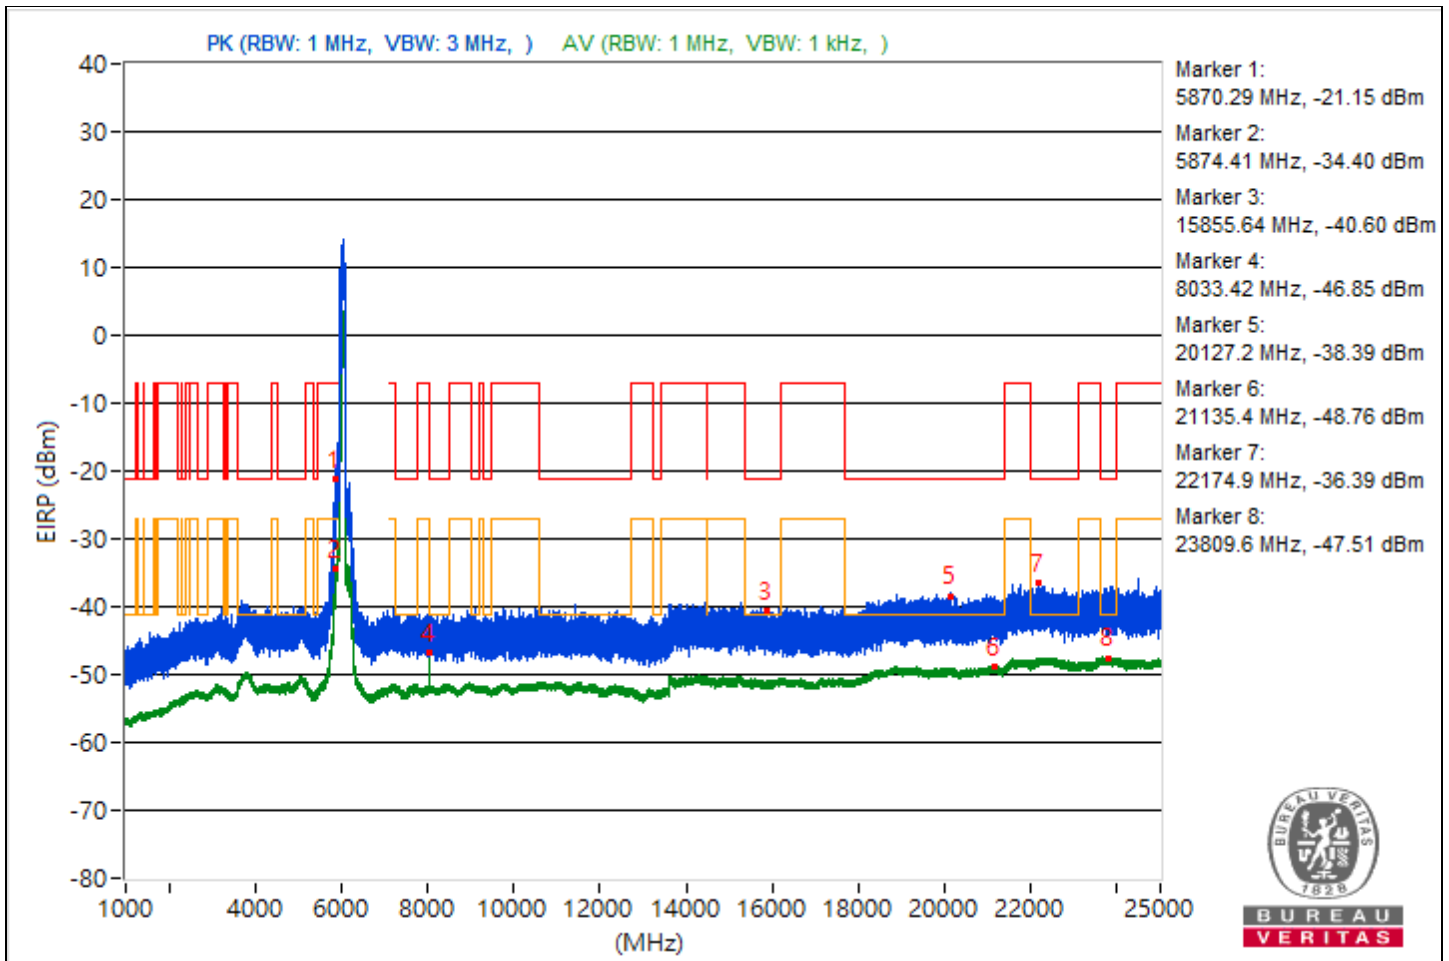

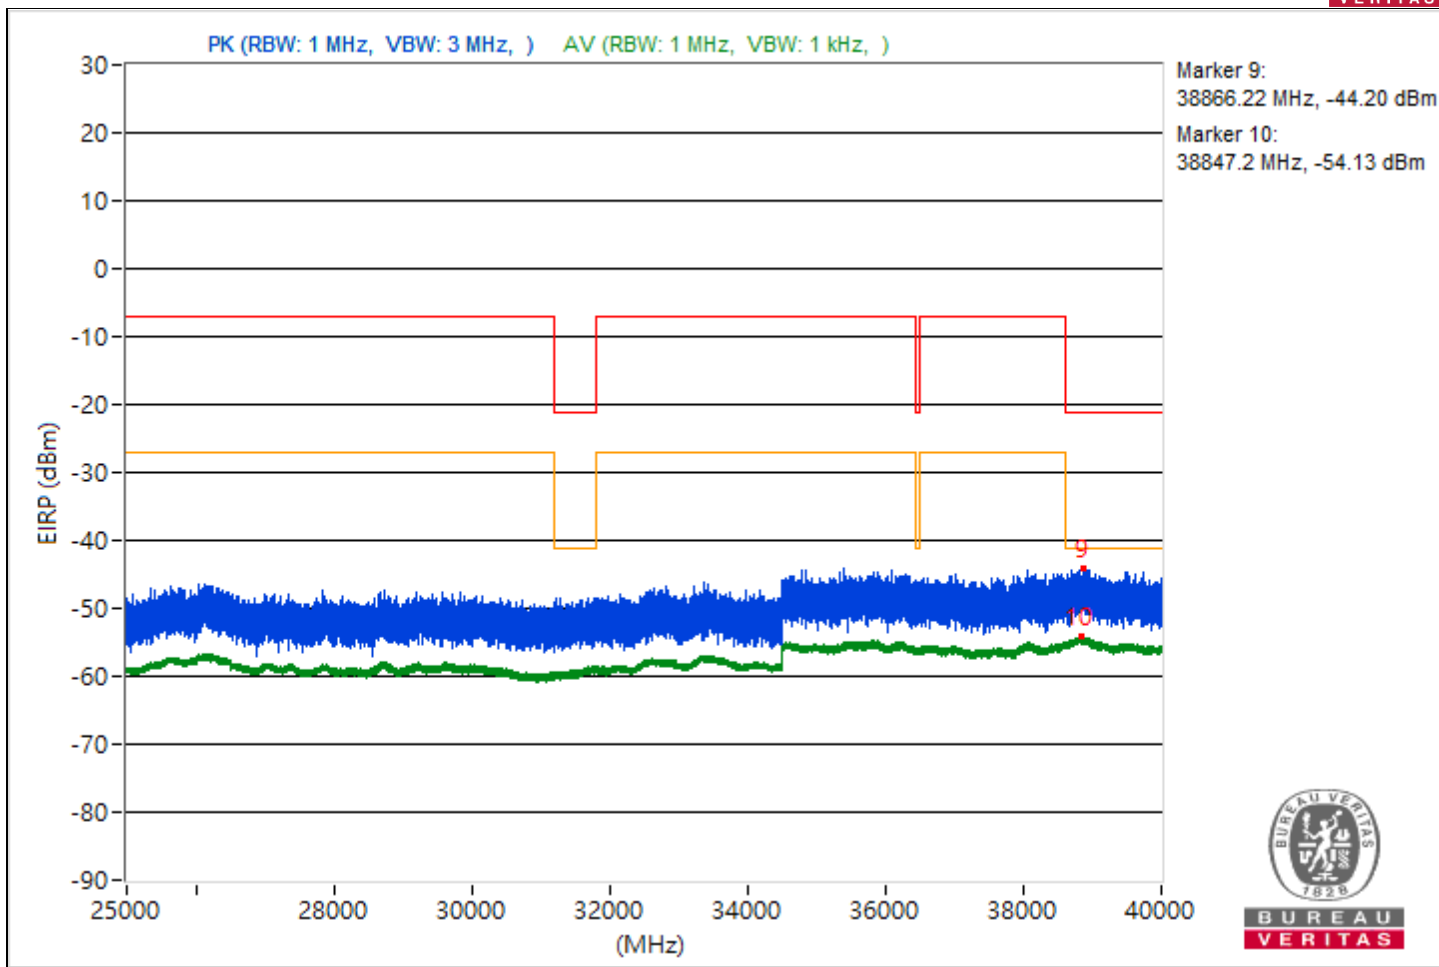





RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3733.27	56.43 PK	74	-17.57	-49.1	-45.25	4.92	-38.83
2	3808.17	45.8 AV	54	-8.2	-57.1	-57.7	4.92	-49.46
3	14474.31	55.11 PK	74	-18.89	-46.49	-50.62	4.92	-40.15
4	8246.67	45.54 AV	54	-8.46	-57.78	-57.52	4.92	-49.72
5	18944.7	57.97 PK	74	-16.03	-51.32	-42.78	4.92	-37.29
6	21070.1	46.48 AV	54	-7.52	-56.31	-57.16	4.92	-48.78
7	22319.6	58.91 PK	74	-15.09	-45.17	-43.54	4.92	-36.35
8	23973.8	47.87 AV	54	-6.13	-55.61	-55.04	4.92	-47.39
9	38917.16	51.26 PK	74	-22.74	-58.55	-49.43	4.92	-44
10	38840.62	41.19 AV	54	-12.81	-62.5	-61.56	4.92	-54.07

Note: Margin value = Emission Level - Limit value

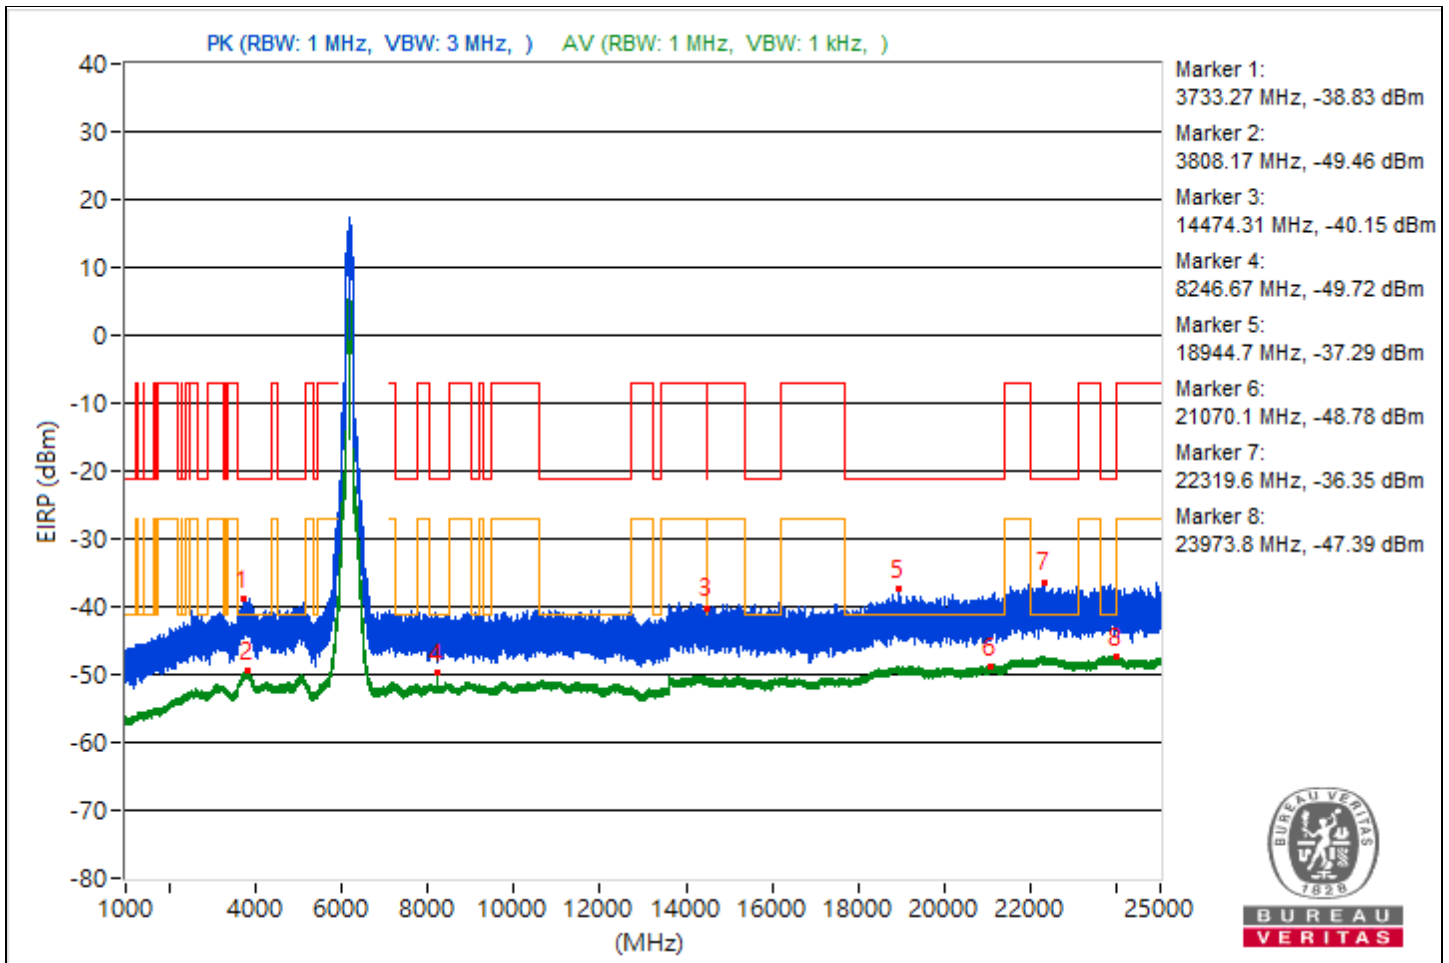

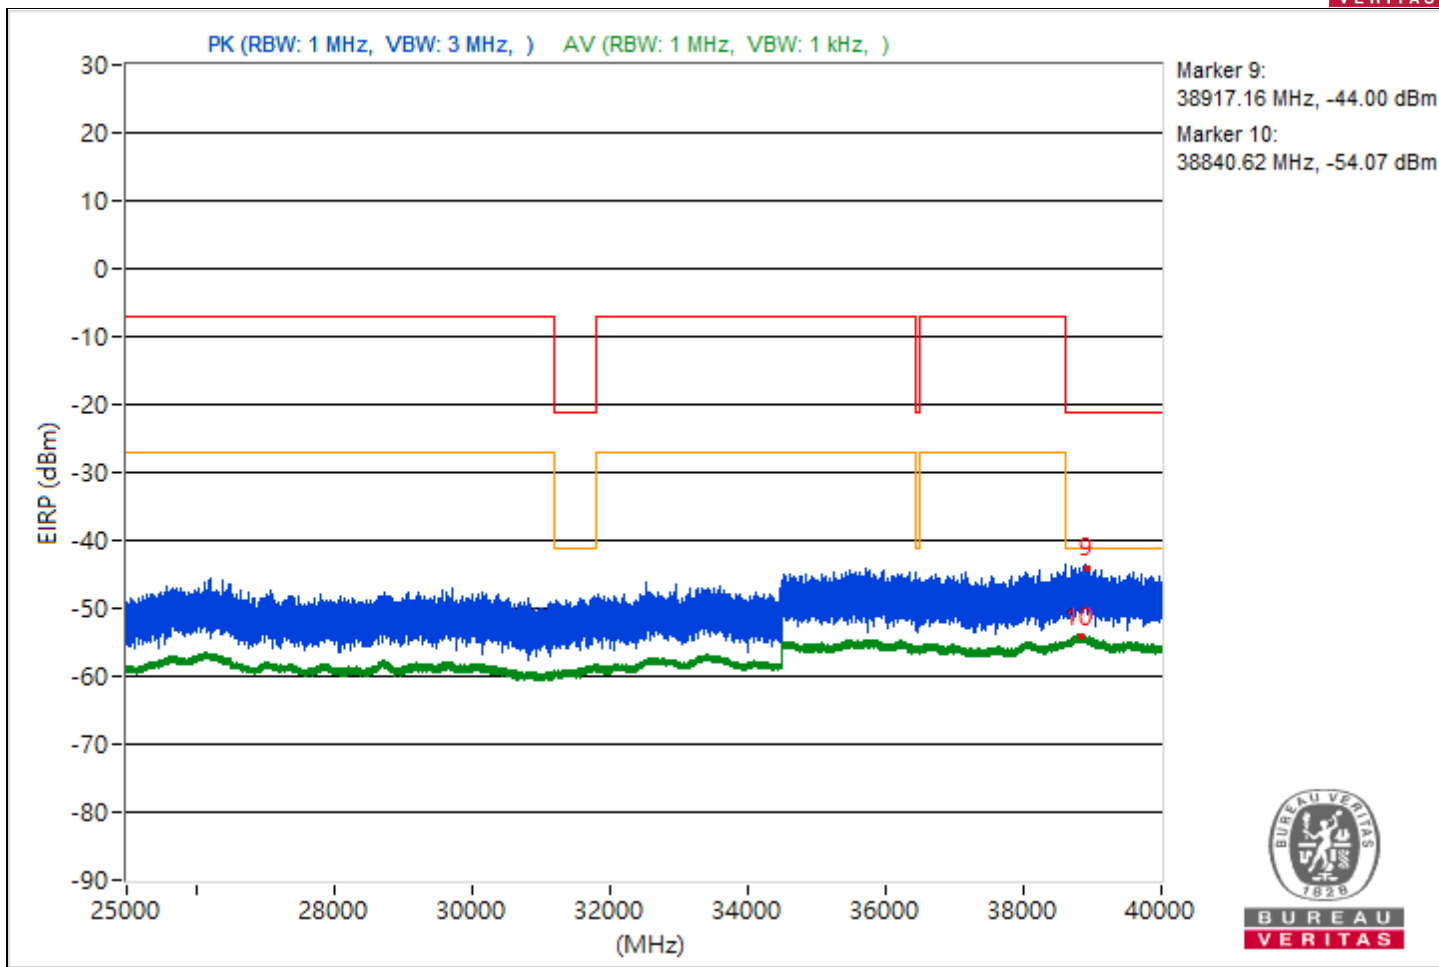





RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.44	55.96 PK	74	-18.04	-45.61	-49.83	4.92	-39.3
2	3806.3	45.63 AV	54	-8.37	-57.89	-57.25	4.92	-49.63
3	14484	55.07 PK	74	-18.93	-46.62	-50.42	4.92	-40.19
4	8460	45.05 AV	54	-8.95	-58.23	-58.06	4.92	-50.21
5	20979.4	58.03 PK	74	-15.97	-51.4	-42.7	4.92	-37.23
6	21178.7	46.58 AV	54	-7.42	-56.9	-56.34	4.92	-48.68
7	23916.7	58.83 PK	74	-15.17	-46	-43.17	4.92	-36.43
8	23733.4	47.67 AV	54	-6.33	-56.24	-54.91	4.92	-47.59
9	38716.53	51.24 PK	74	-22.76	-49.94	-55.82	4.92	-44.02
10	38834.22	41.19 AV	54	-12.81	-61.61	-62.43	4.92	-54.07

Note: Margin value = Emission Level - Limit value

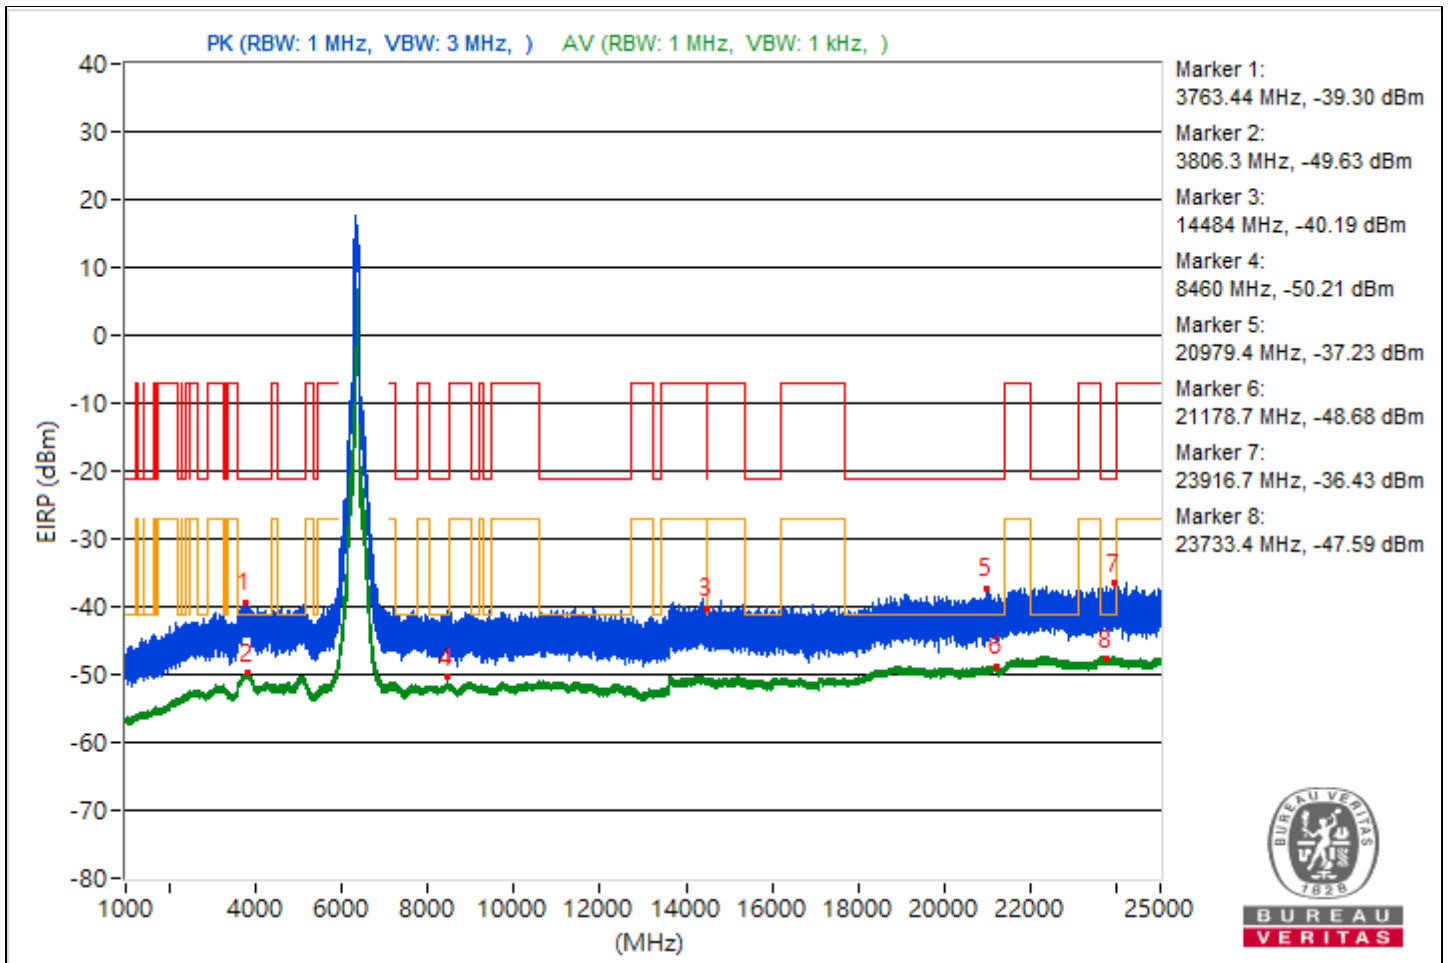

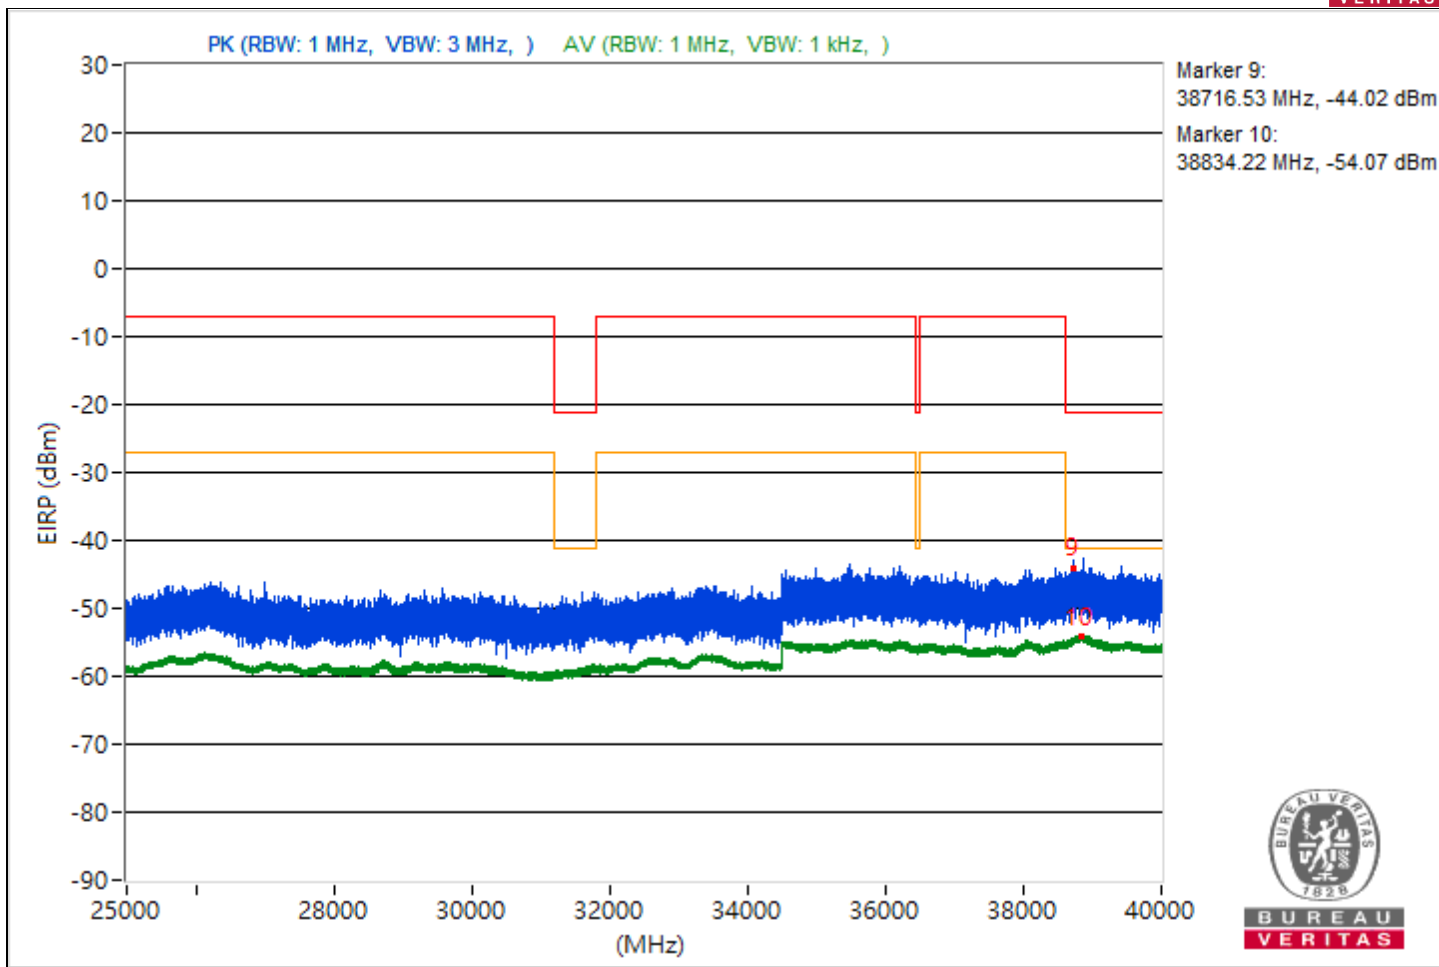





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.32	55.68 PK	74	-18.32	-45.97	-49.91	4.92	-39.58
2	3806.77	45.87 AV	54	-8.13	-57.64	-57.02	4.92	-49.39
3	7260.33	55.39 PK	74	-18.61	-51.26	-45.9	4.92	-39.87
4	14495.73	44.73 AV	54	-9.27	-58.67	-58.27	4.92	-50.53
5	21153	57.09 PK	74	-16.91	-44.21	-49.51	4.92	-38.17
6	21158.5	46.58 AV	54	-7.42	-56.97	-56.27	4.92	-48.68
7	22528.7	58.78 PK	74	-15.22	-42.97	-46.59	4.92	-36.48
8	22453.1	47.81 AV	54	-6.19	-55.04	-55.75	4.92	-47.45
9	38767.47	52.16 PK	74	-21.84	-49.56	-53.27	4.92	-43.1
10	38850.49	41.5 AV	54	-12.5	-61.58	-61.8	4.92	-53.76

Note: Margin value = Emission Level - Limit value

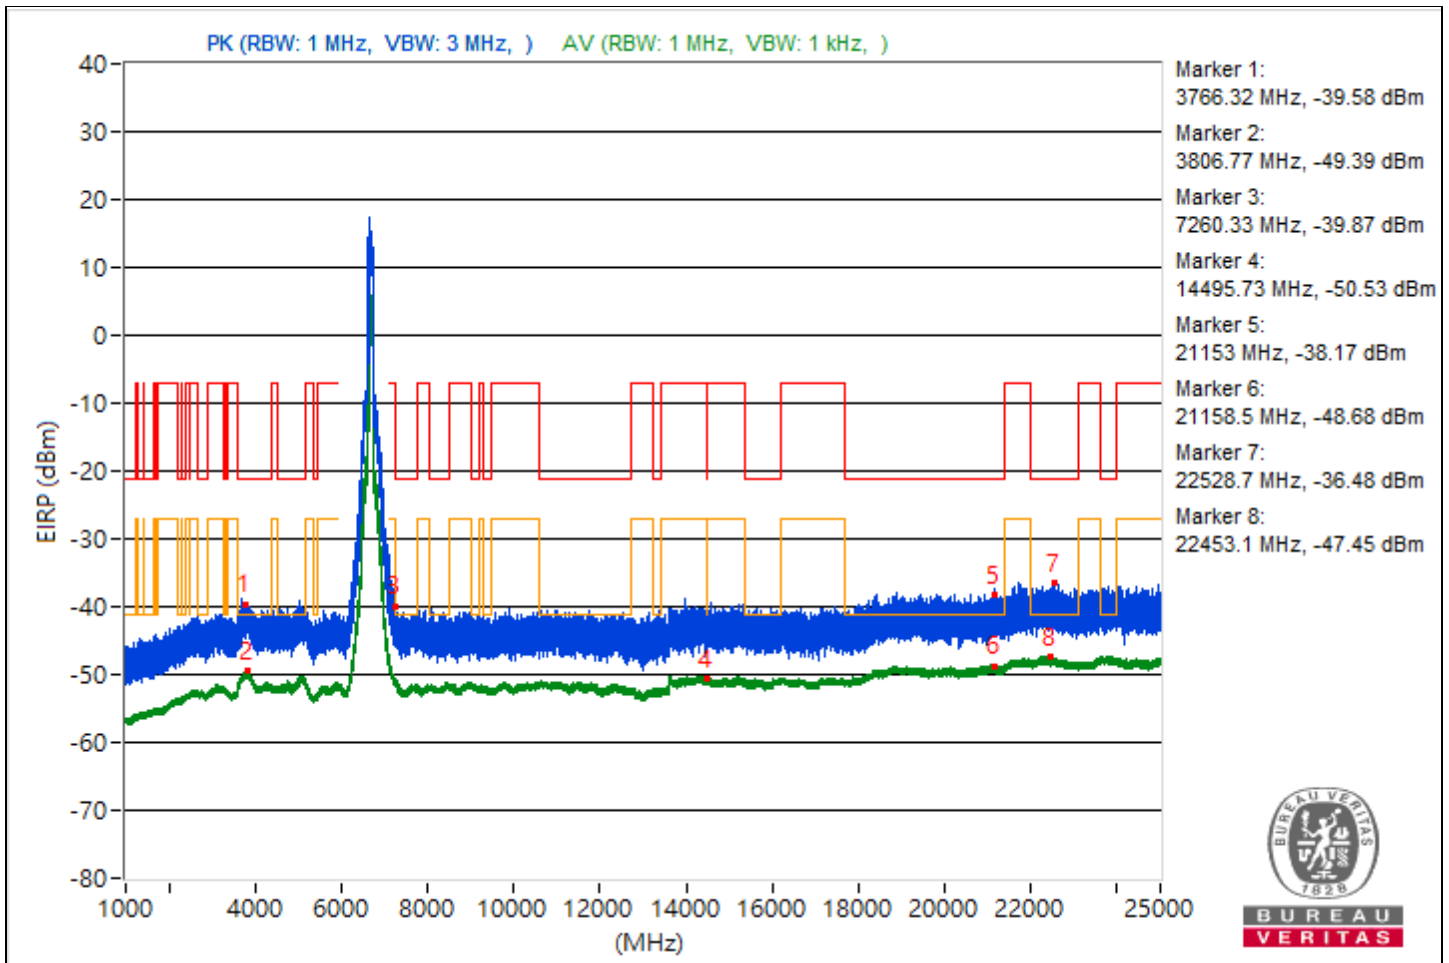

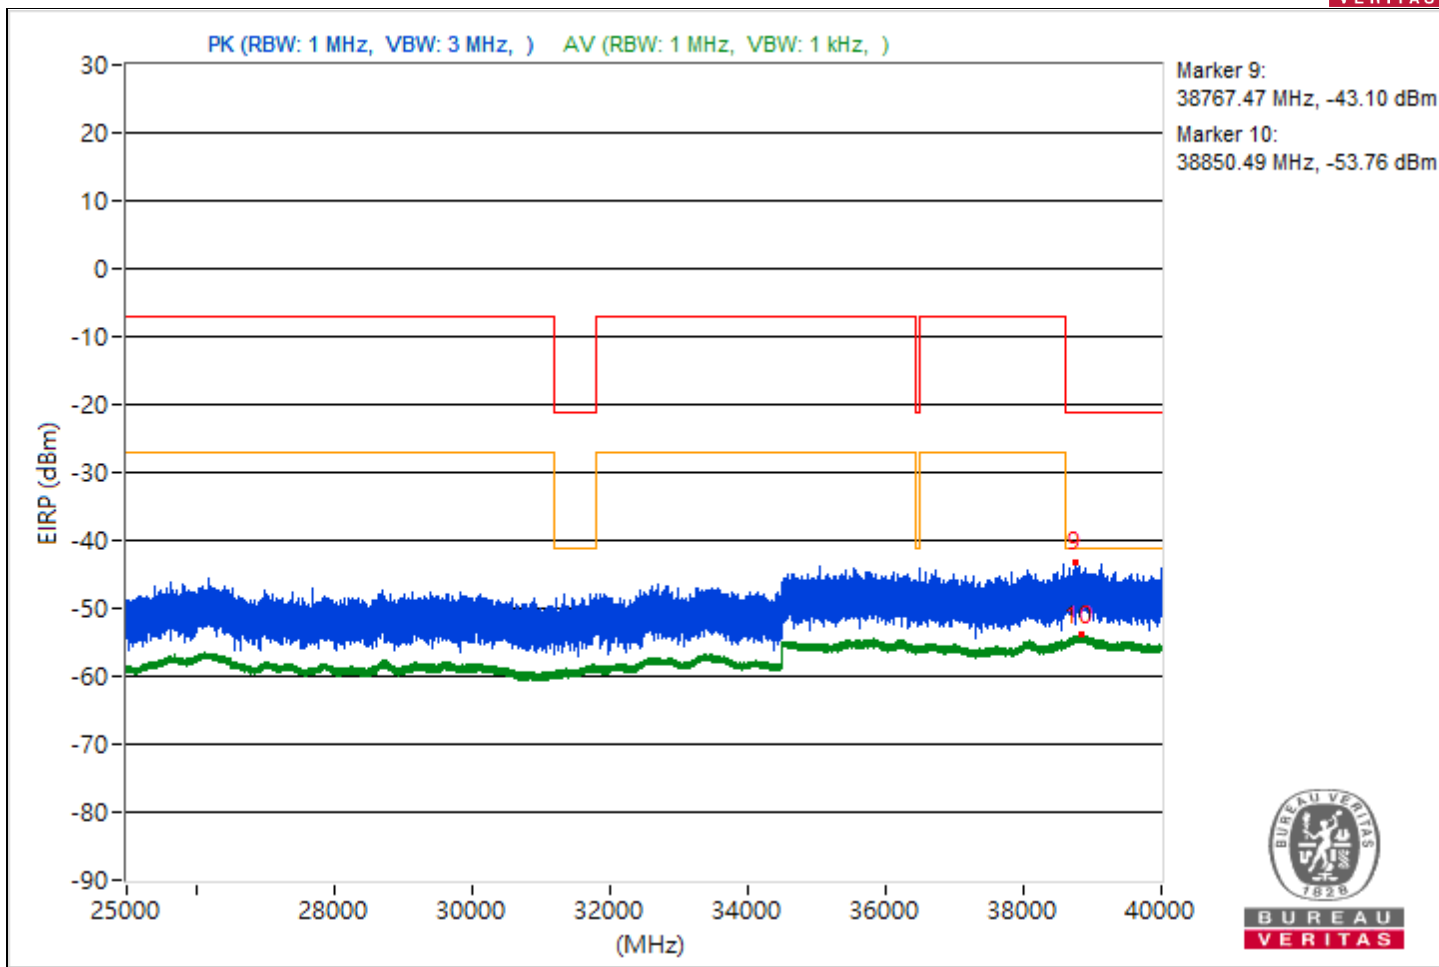





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.79	57.63 PK	74	-16.37	-45.56	-45.56	4.92	-37.63
2	3832.04	46.08 AV	54	-7.92	-57.11	-57.11	4.92	-49.18
3	9048.44	56.95 PK	74	-17.05	-46.24	-46.24	4.92	-38.31
4	14499.64	45.55 AV	54	-8.45	-57.64	-57.64	4.92	-49.71
5	18839.2	58.71 PK	74	-15.29	-44.48	-44.48	4.92	-36.55
6	21136.6	47.18 AV	54	-6.82	-56.01	-56.01	4.92	-48.08
7	22313	59.94 PK	74	-14.06	-43.25	-43.25	4.92	-35.32
8	22276.4	48.43 AV	54	-5.57	-54.76	-54.76	4.92	-46.83
9	38939.2	52.91 PK	74	-21.09	-50.28	-50.28	4.92	-42.35
10	38847.11	41.87 AV	54	-12.13	-61.32	-61.32	4.92	-53.39

Note: Margin value = Emission Level - Limit value

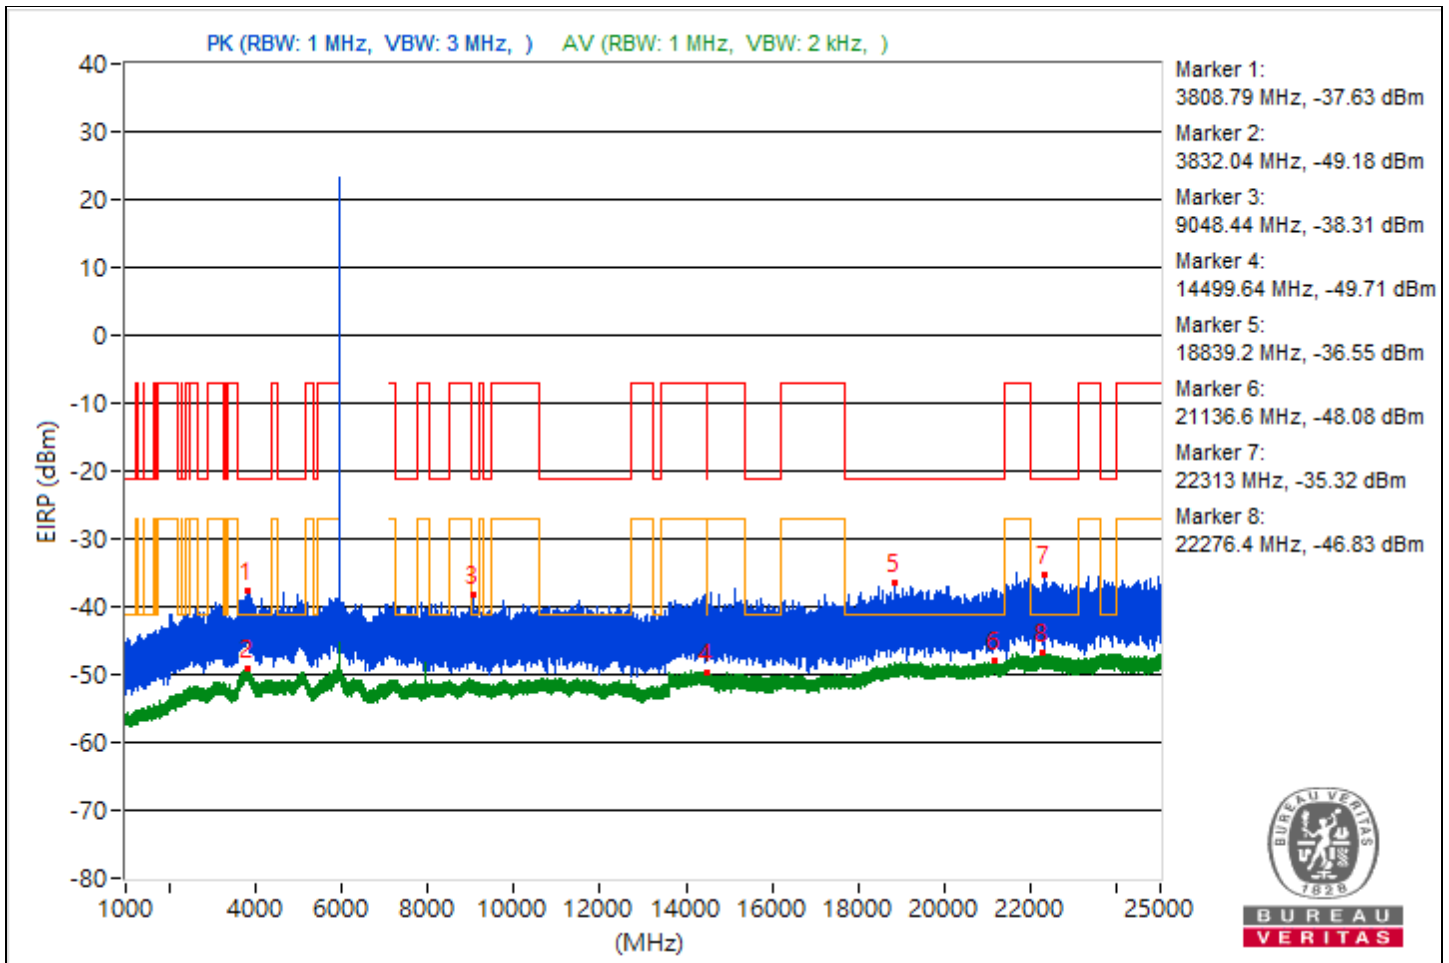

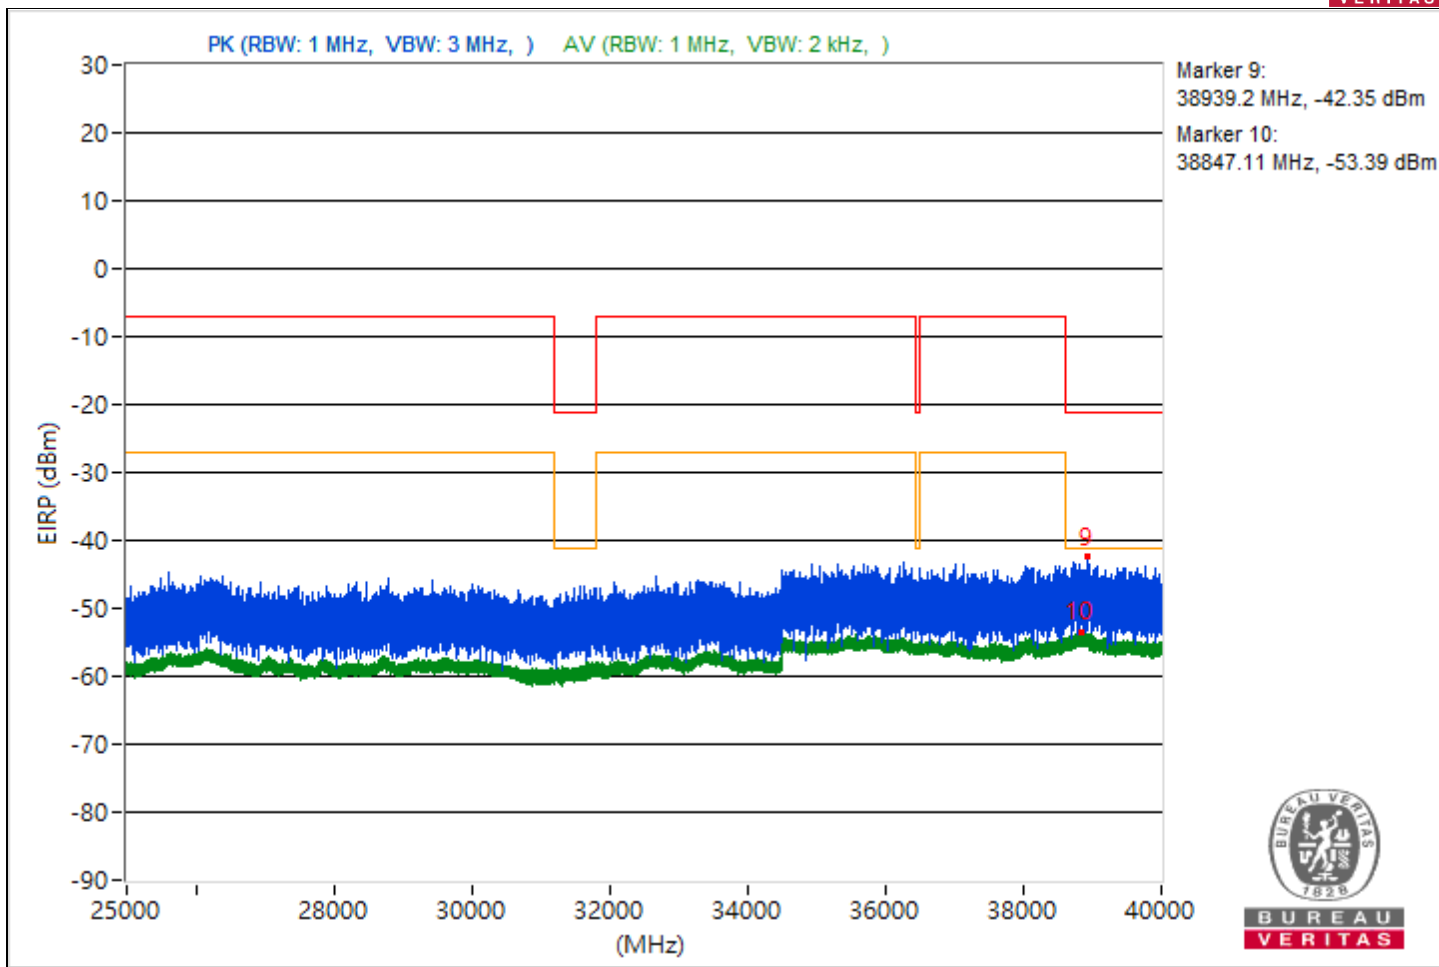





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.33	56.68 PK	74	-17.32	-44.31	-51.16	4.92	-38.58
2	3787.71	45.96 AV	54	-8.04	-56.89	-57.6	4.92	-49.3
3	7280.71	54.44 PK	74	-19.56	-46.89	-52.07	4.92	-40.82
4	14482.58	44.96 AV	54	-9.04	-57.78	-58.72	4.92	-50.3
5	20131.9	57.52 PK	74	-16.48	-48.62	-43.93	4.92	-37.74
6	21398.1	46.82 AV	54	-7.18	-56.84	-55.95	4.92	-48.44
7	22266.3	58.42 PK	74	-15.58	-47.15	-43.25	4.92	-36.84
8	23959	48.07 AV	54	-5.93	-54.57	-55.77	4.92	-47.19
9	38913.69	50.57 PK	74	-23.43	-51	-55.21	4.92	-44.69
10	38780.09	41.81 AV	54	-12.19	-61.24	-61.53	4.92	-53.45

Note: Margin value = Emission Level - Limit value

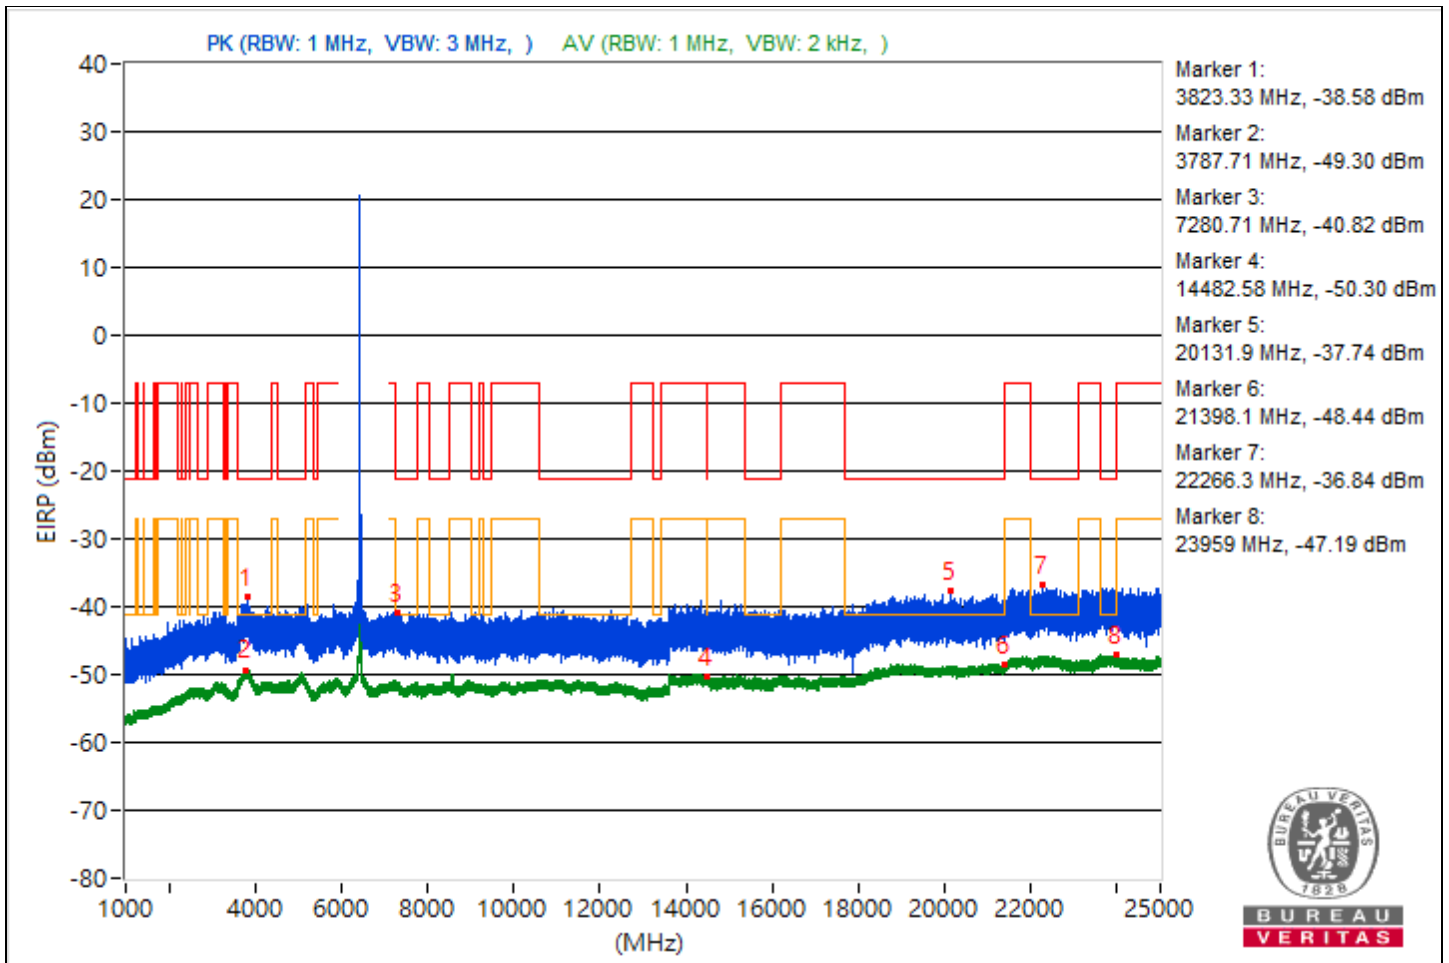

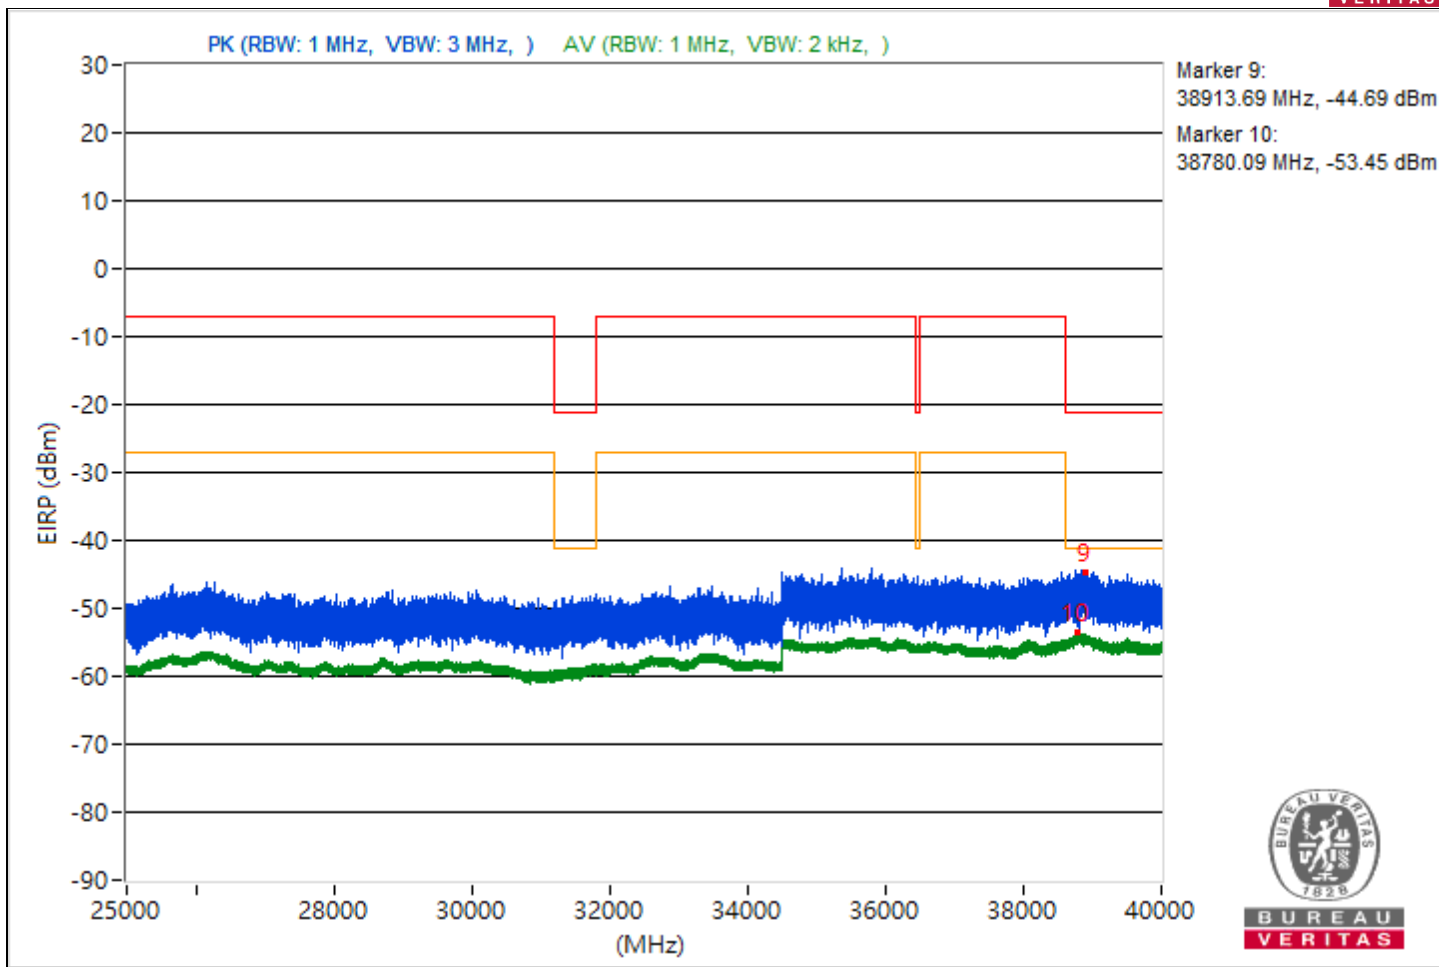





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3881.04	55.85 PK	74	-18.15	-49.32	-45.98	4.92	-39.41
2	3793.54	45.57 AV	54	-8.43	-58.13	-57.16	4.92	-49.69
3	15390.93	55.19 PK	74	-18.81	-51.29	-46.15	4.92	-40.07
4	14497.96	44.9 AV	54	-9.1	-58.64	-57.97	4.92	-50.36
5	21066.6	57.86 PK	74	-16.14	-48.61	-43.48	4.92	-37.4
6	21087.8	46.93 AV	54	-7.07	-56.79	-55.79	4.92	-48.33
7	23606.4	57.89 PK	74	-16.11	-43.61	-48.09	4.92	-37.37
8	23715.5	48.22 AV	54	-5.78	-55.19	-54.76	4.92	-47.04
9	39331.11	50.74 PK	74	-23.26	-50.45	-56.26	4.92	-44.52
10	38824.18	41.38 AV	54	-12.62	-61.36	-62.32	4.92	-53.88

Note: Margin value = Emission Level - Limit value

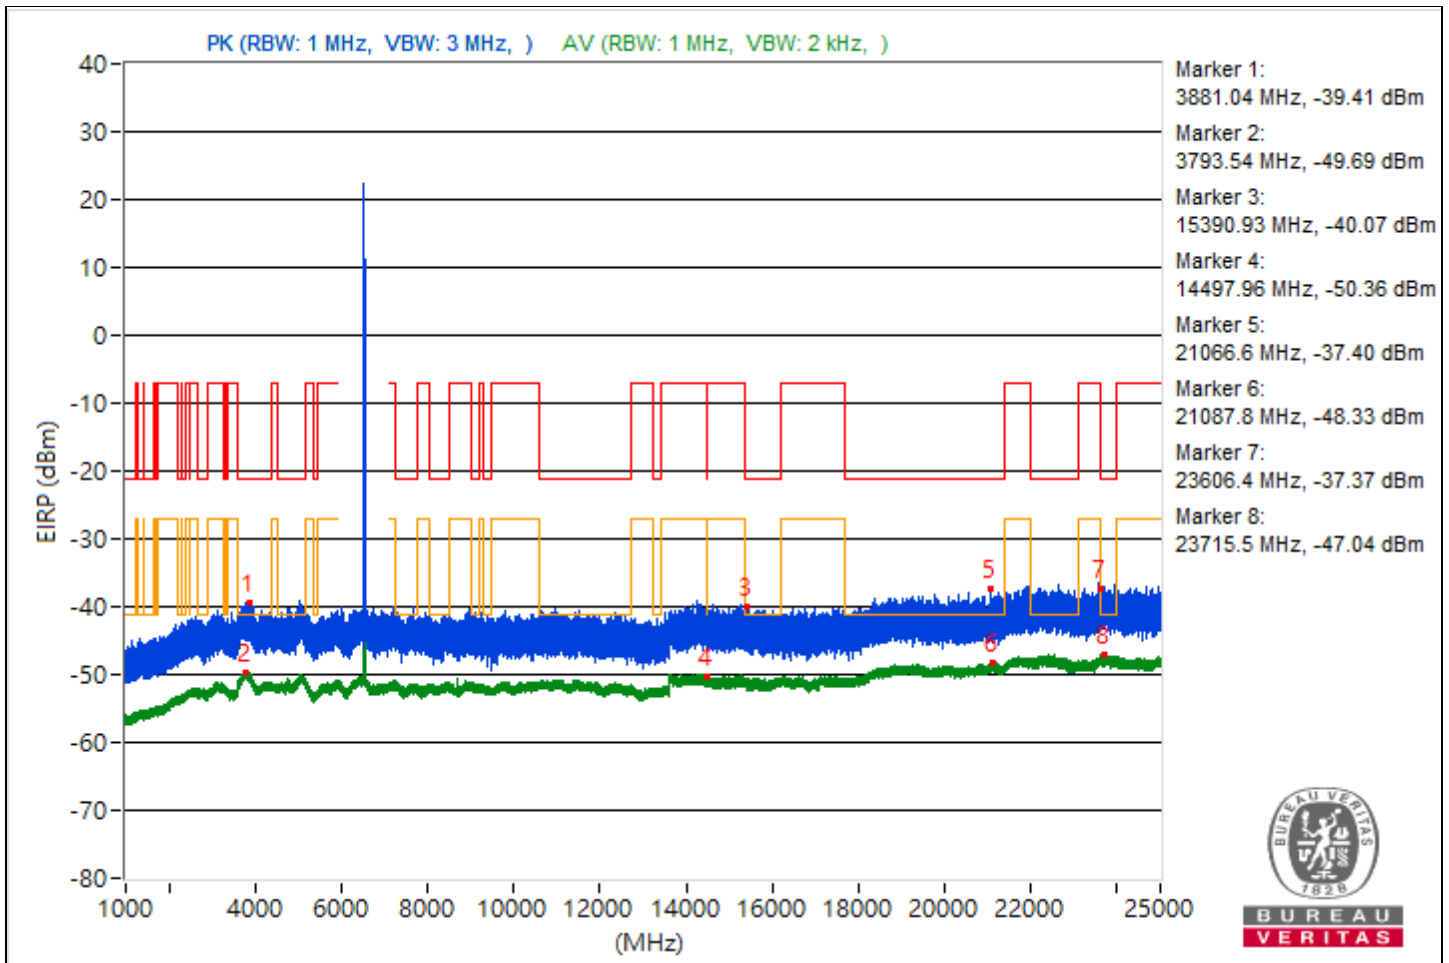

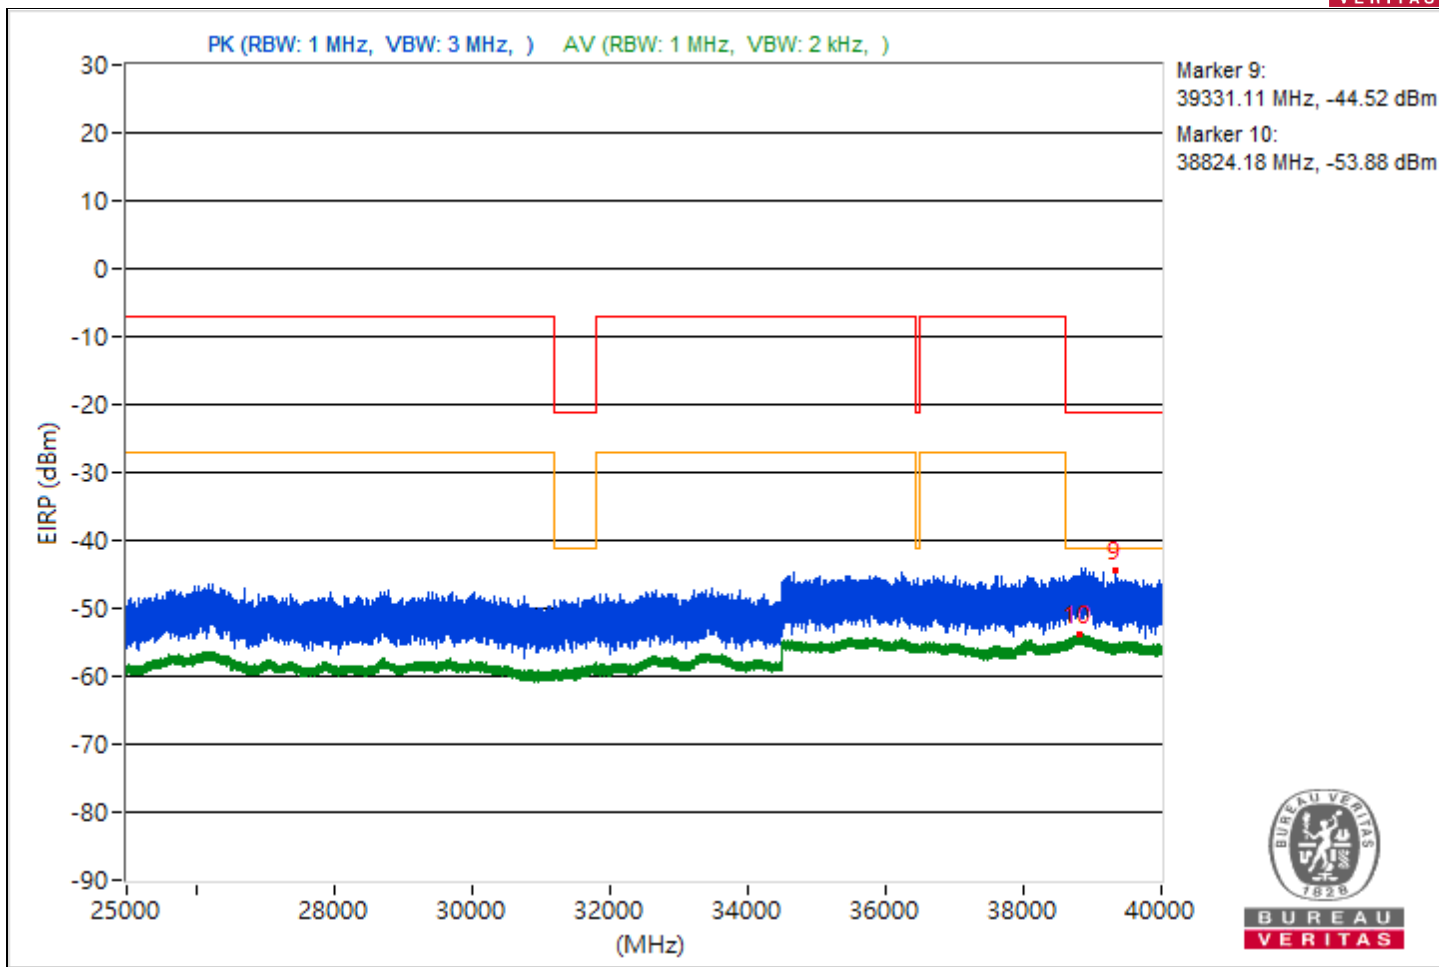





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.19	56.18 PK	74	-17.82	-45.01	-50.8	4.92	-39.08
2	3811.82	45.98 AV	54	-8.02	-57.51	-56.92	4.92	-49.28
3	14492.18	55.02 PK	74	-18.98	-46.21	-51.83	4.92	-40.24
4	14489.42	44.71 AV	54	-9.29	-57.79	-59.29	4.92	-50.55
5	18994.8	57.34 PK	74	-16.66	-44.08	-48.88	4.92	-37.92
6	21095.5	46.88 AV	54	-7.12	-56.73	-55.93	4.92	-48.38
7	23953.4	58.38 PK	74	-15.62	-48.1	-42.96	4.92	-36.88
8	22471.2	47.94 AV	54	-6.06	-54.63	-55.98	4.92	-47.32
9	38877.24	51.47 PK	74	-22.53	-53.22	-50.6	4.92	-43.79
10	38826.93	41.47 AV	54	-12.53	-61.37	-62.09	4.92	-53.79

Note: Margin value = Emission Level - Limit value

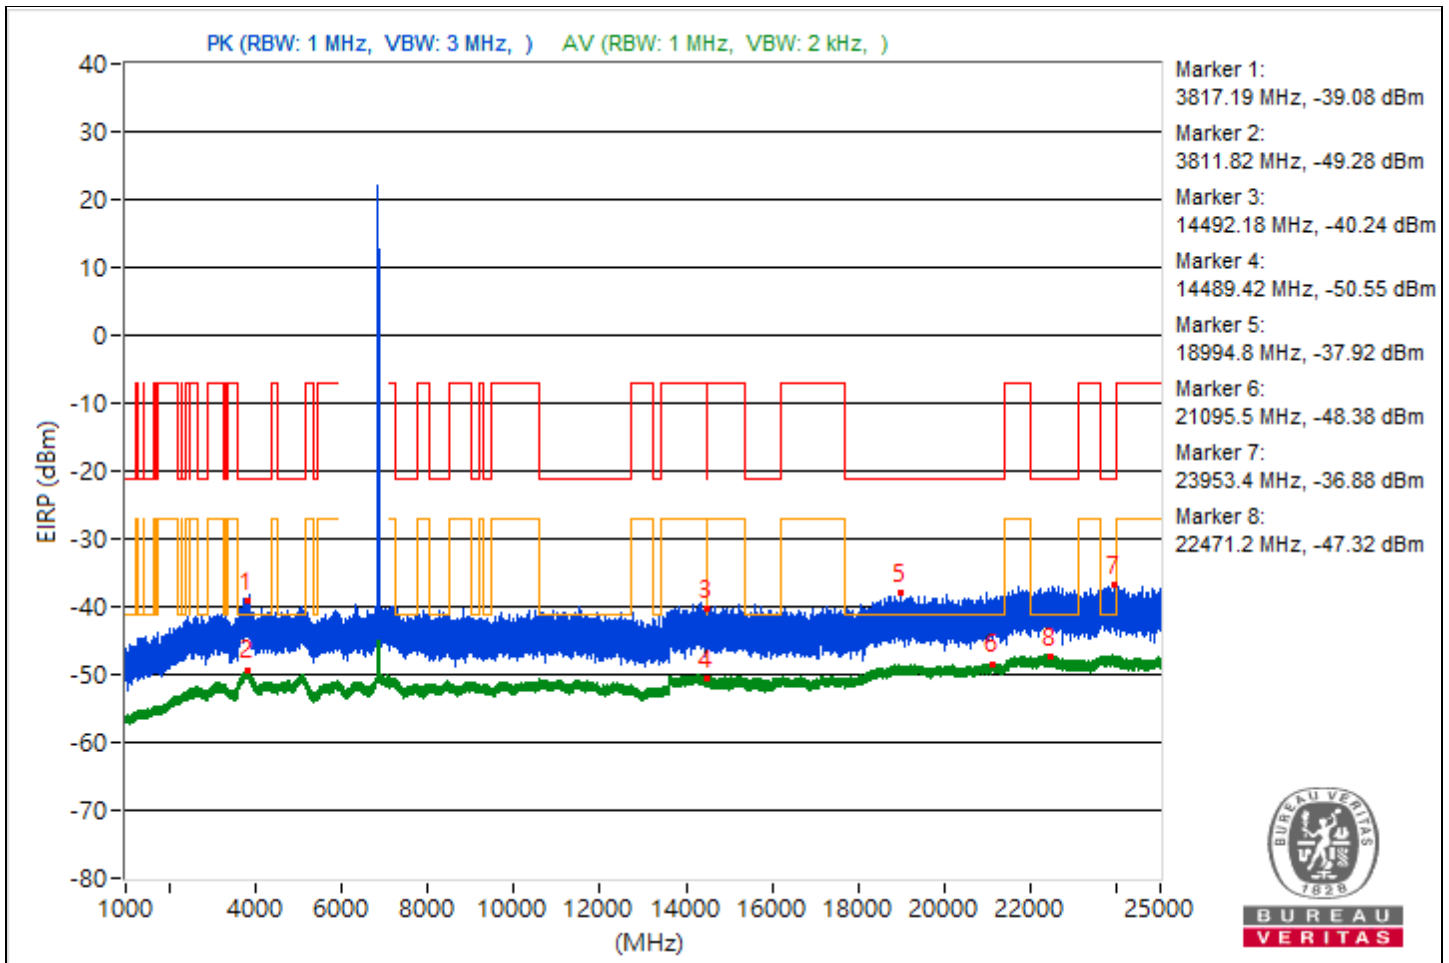

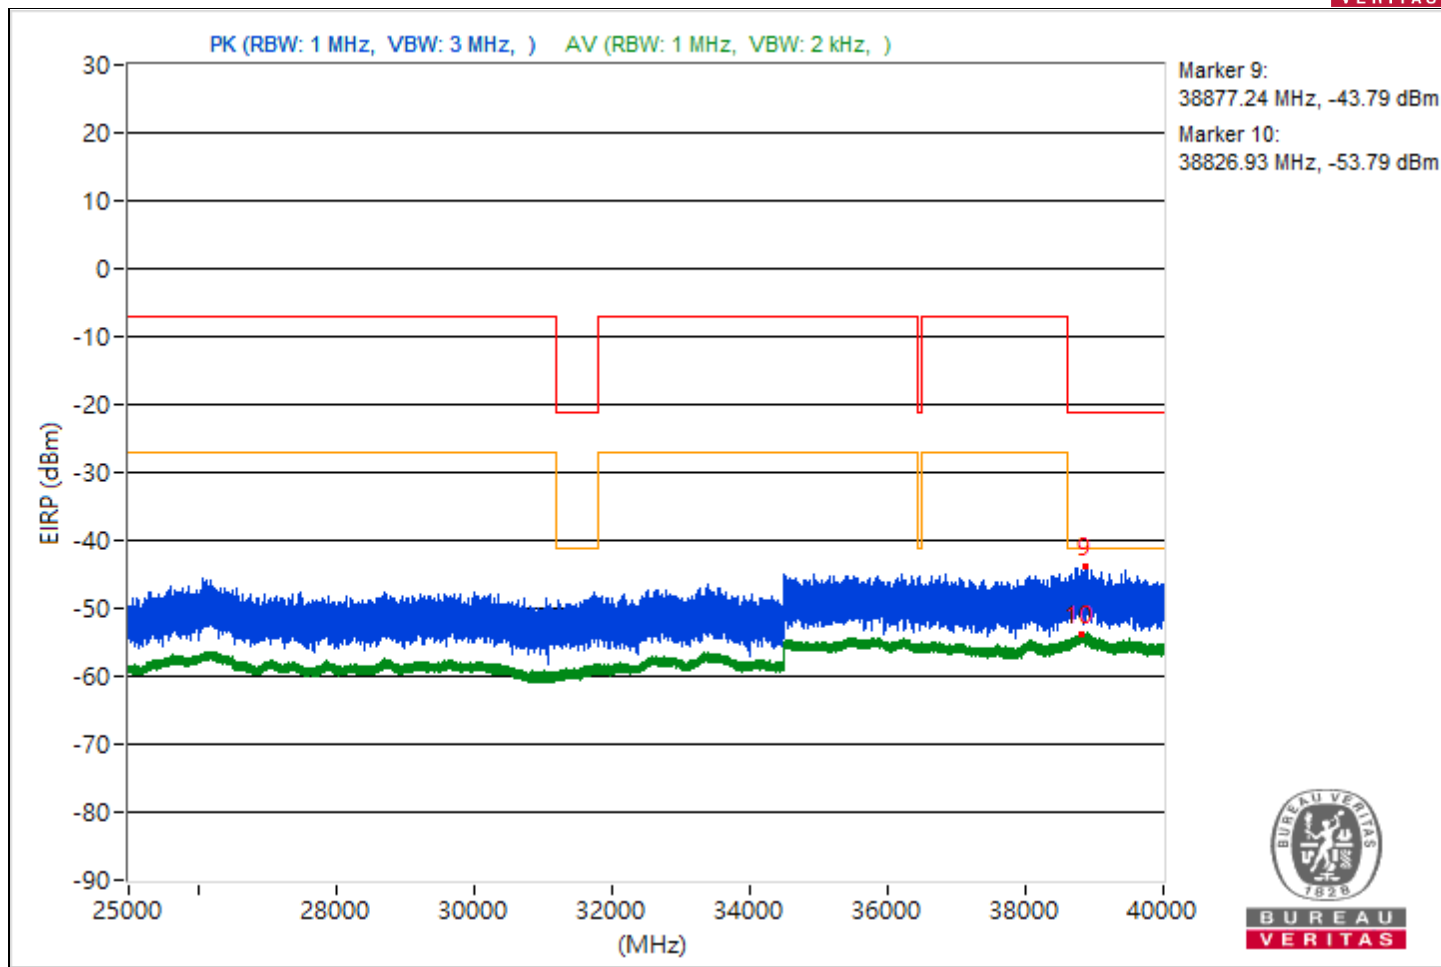





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.62	56.31 PK	74	-17.69	-45.36	-49.22	4.92	-38.95
2	3857.24	45.69 AV	54	-8.31	-57.07	-57.97	4.92	-49.57
3	15507.29	54.9 PK	74	-19.1	-46.27	-52.19	4.92	-40.36
4	14491.47	44.85 AV	54	-9.15	-58.88	-57.86	4.92	-50.41
5	19000.4	56.81 PK	74	-17.19	-52.06	-44	4.92	-38.45
6	21098.3	47.01 AV	54	-6.99	-56.54	-55.86	4.92	-48.25
7	23867.6	58.35 PK	74	-15.65	-47.59	-43.17	4.92	-36.91
8	22233	48.27 AV	54	-5.73	-55.31	-54.56	4.92	-46.99
9	38974.58	51.23 PK	74	-22.77	-49.44	-58.64	4.92	-44.03
10	38958.13	41.41 AV	54	-12.59	-62.3	-61.33	4.92	-53.85

Note: Margin value = Emission Level - Limit value

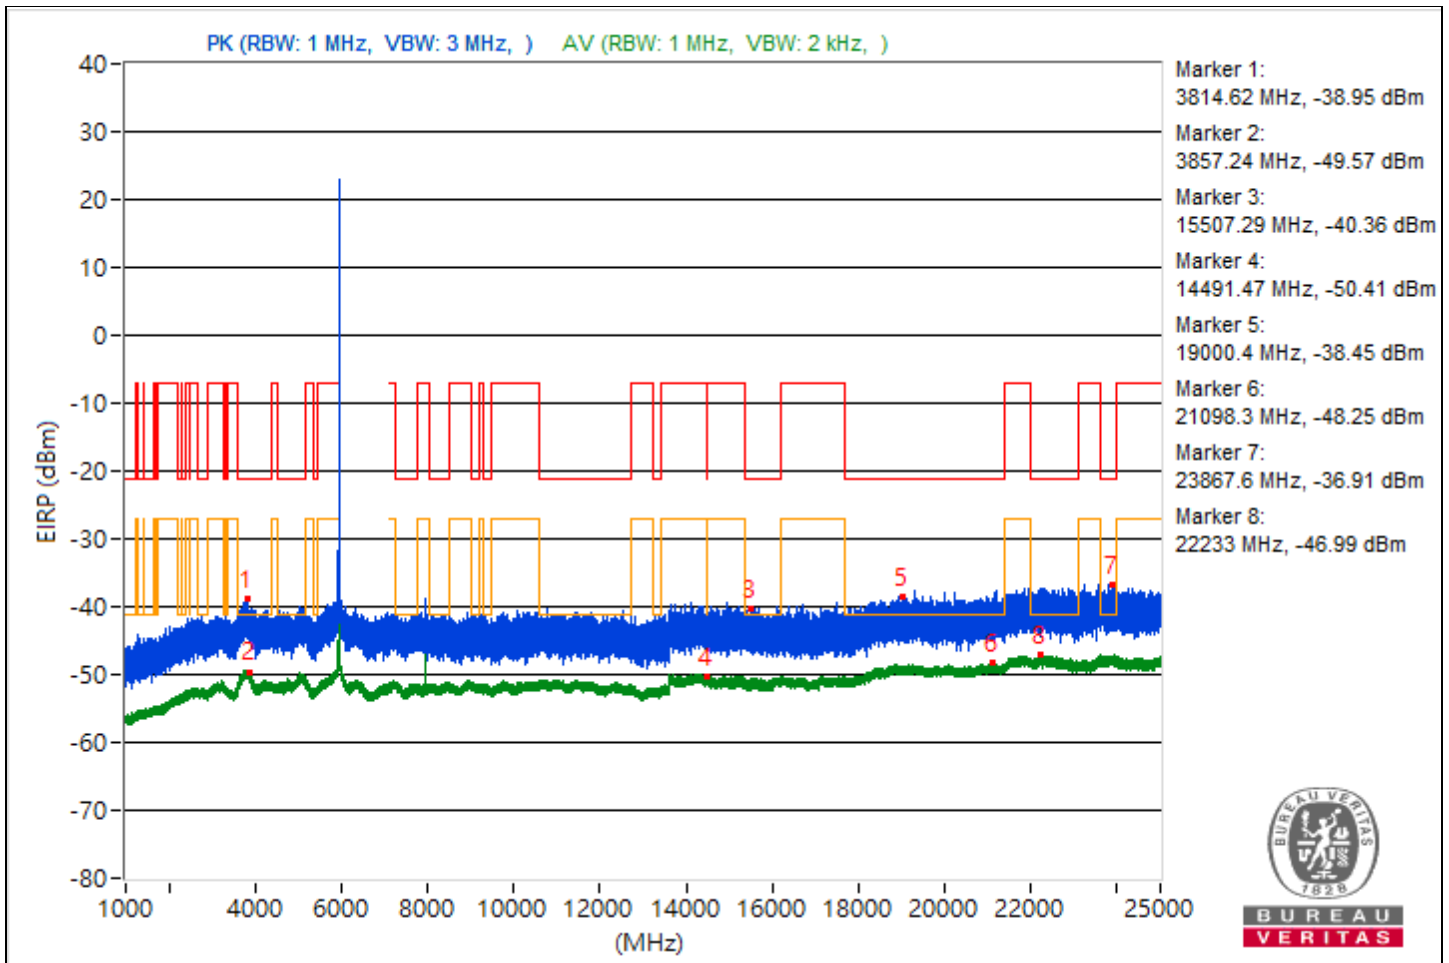

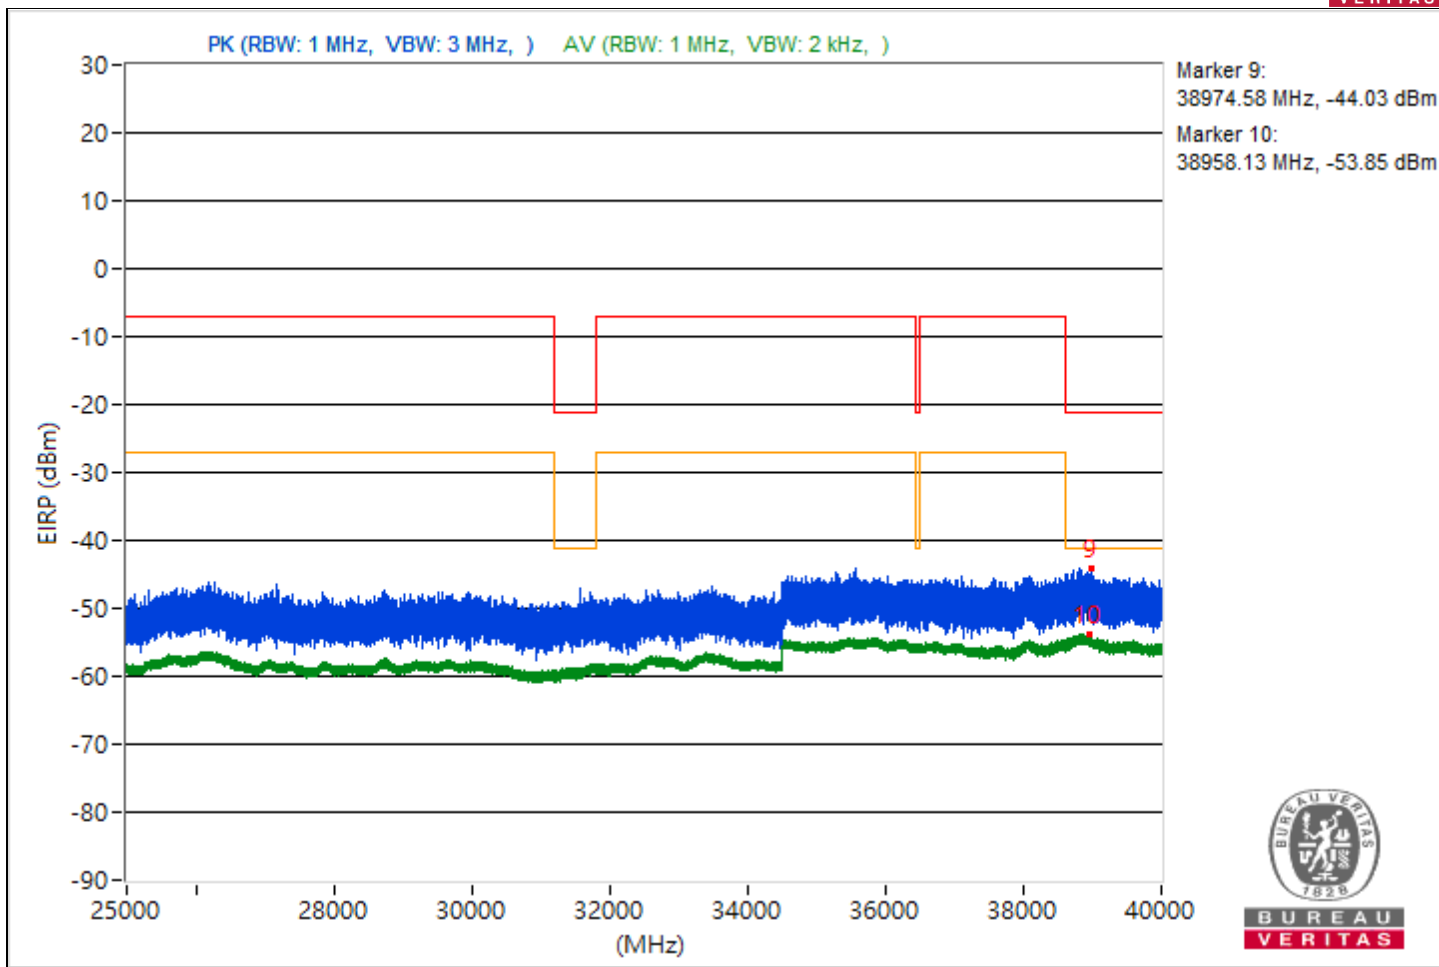





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3725.1	56.55 PK	74	-17.45	-45.38	-48.44	4.92	-38.71
2	3815.63	45.63 AV	54	-8.37	-57.05	-58.15	4.92	-49.63
3	10778.58	54.78 PK	74	-19.22	-46.29	-52.7	4.92	-40.48
4	15653.69	44.65 AV	54	-9.35	-59.48	-57.76	4.92	-50.61
5	21306.8	57.15 PK	74	-16.85	-43.91	-50.37	4.92	-38.11
6	21099.6	46.63 AV	54	-7.37	-57.45	-55.82	4.92	-48.63
7	23990.5	58.64 PK	74	-15.36	-49.87	-42.23	4.92	-36.62
8	23655	48.19 AV	54	-5.81	-55.43	-54.62	4.92	-47.07
9	38990.13	50.61 PK	74	-23.39	-55.65	-50.8	4.92	-44.65
10	38871.47	41.47 AV	54	-12.53	-62.21	-61.27	4.92	-53.79

Note: Margin value = Emission Level - Limit value

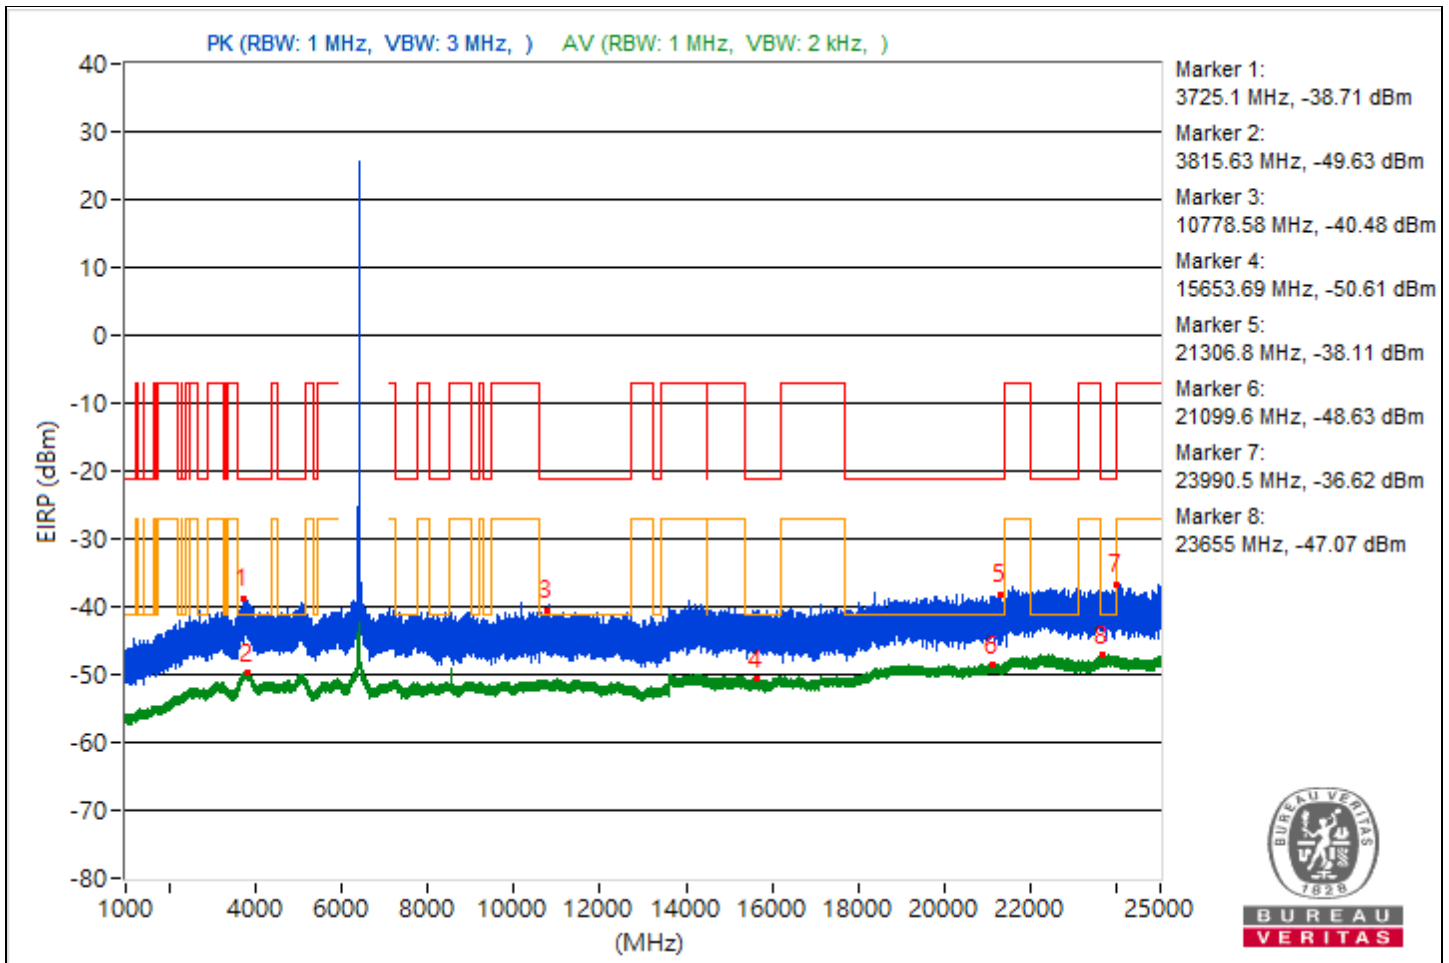

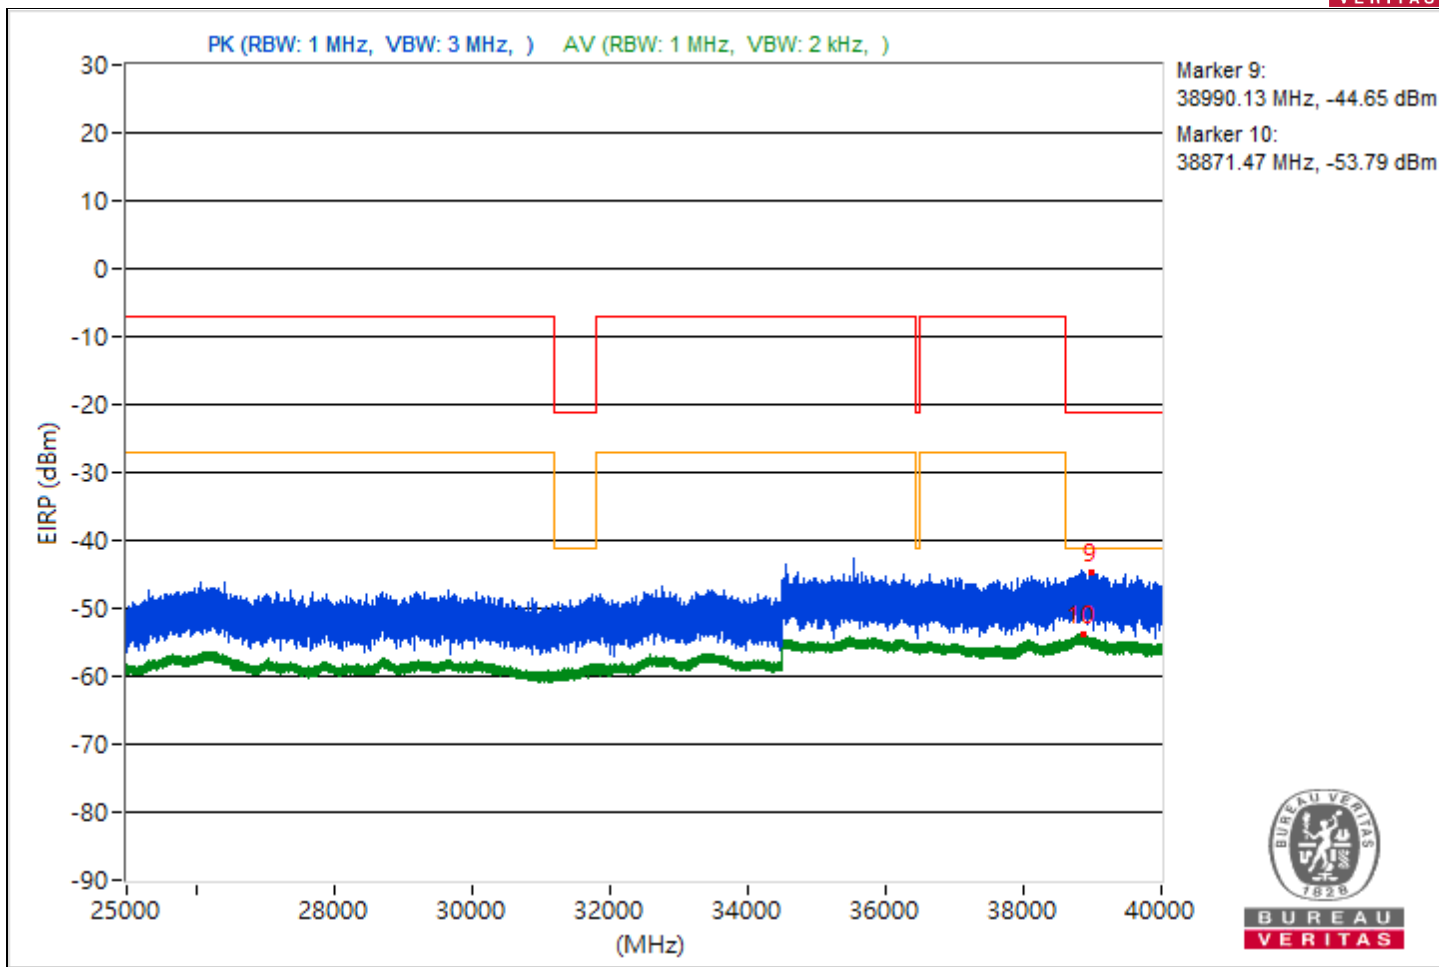





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.2	56.47 PK	74	-17.53	-45.63	-48.2	4.92	-38.79
2	3778.07	46.1 AV	54	-7.9	-56.83	-57.36	4.92	-49.16
3	15659.02	54.86 PK	74	-19.14	-46.37	-52	4.92	-40.4
4	15645.51	44.85 AV	54	-9.15	-57.84	-58.89	4.92	-50.41
5	18912	57.69 PK	74	-16.31	-43.44	-49.58	4.92	-37.57
6	21151	47.15 AV	54	-6.85	-55.67	-56.44	4.92	-48.11
7	23635.7	58.42 PK	74	-15.58	-42.6	-49.28	4.92	-36.84
8	22205.2	48.11 AV	54	-5.89	-55.55	-54.66	4.92	-47.15
9	38804.18	51.07 PK	74	-22.93	-50.21	-55.6	4.92	-44.19
10	38835.73	41.49 AV	54	-12.51	-61.31	-62.14	4.92	-53.77

Note: Margin value = Emission Level - Limit value

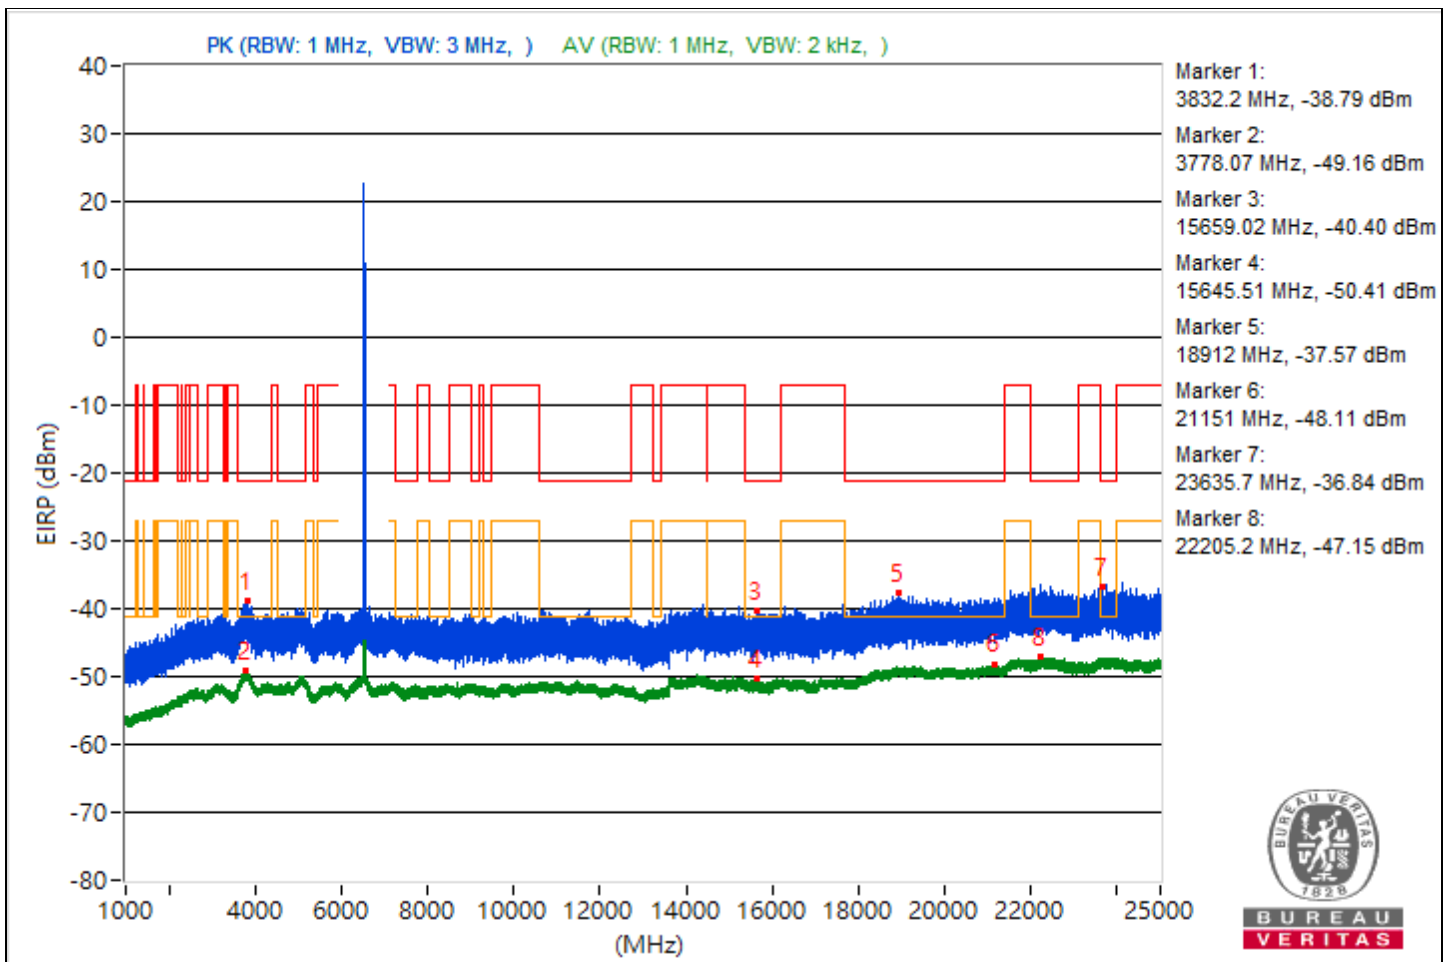

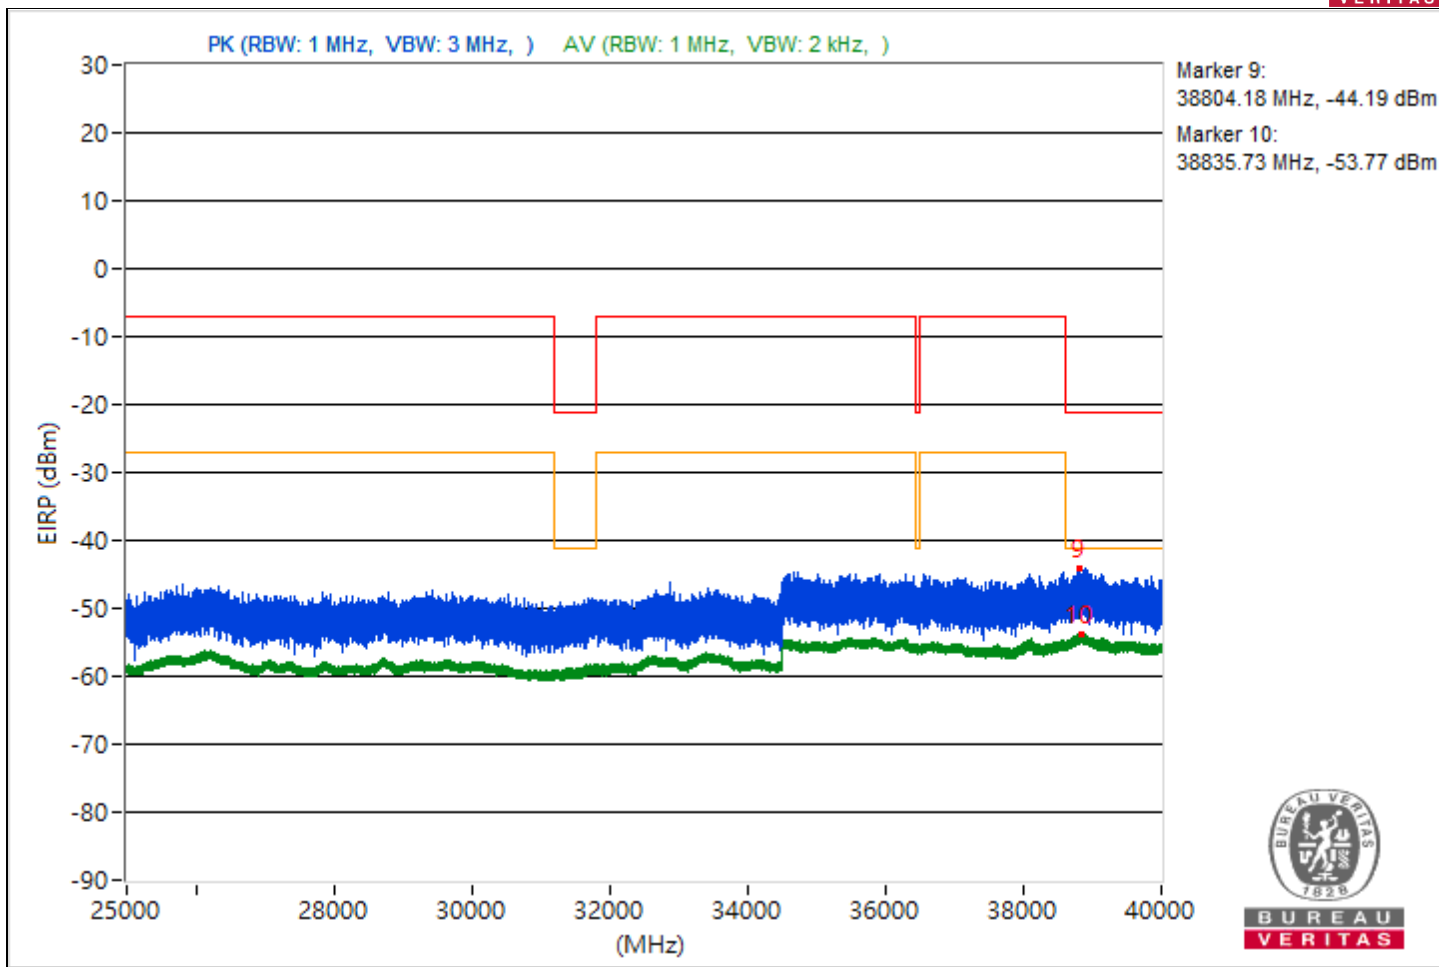





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3881.82	56.01 PK	74	-17.99	-49.48	-45.69	4.92	-39.25
2	3836.63	45.62 AV	54	-8.38	-58.1	-57.1	4.92	-49.64
3	15934.22	54.92 PK	74	-19.08	-46	-53.31	4.92	-40.34
4	14494.76	44.65 AV	54	-9.35	-59.11	-58.04	4.92	-50.61
5	20962.8	57.18 PK	74	-16.82	-48.42	-44.47	4.92	-38.08
6	21140.2	47.09 AV	54	-6.91	-55.75	-56.49	4.92	-48.17
7	22658.6	59.07 PK	74	-14.93	-49.48	-41.79	4.92	-36.19
8	22268.9	48.18 AV	54	-5.82	-54.48	-55.61	4.92	-47.08
9	38769.16	51.14 PK	74	-22.86	-50.07	-55.82	4.92	-44.12
10	38834.4	41.34 AV	54	-12.66	-61.21	-62.59	4.92	-53.92

Note: Margin value = Emission Level - Limit value

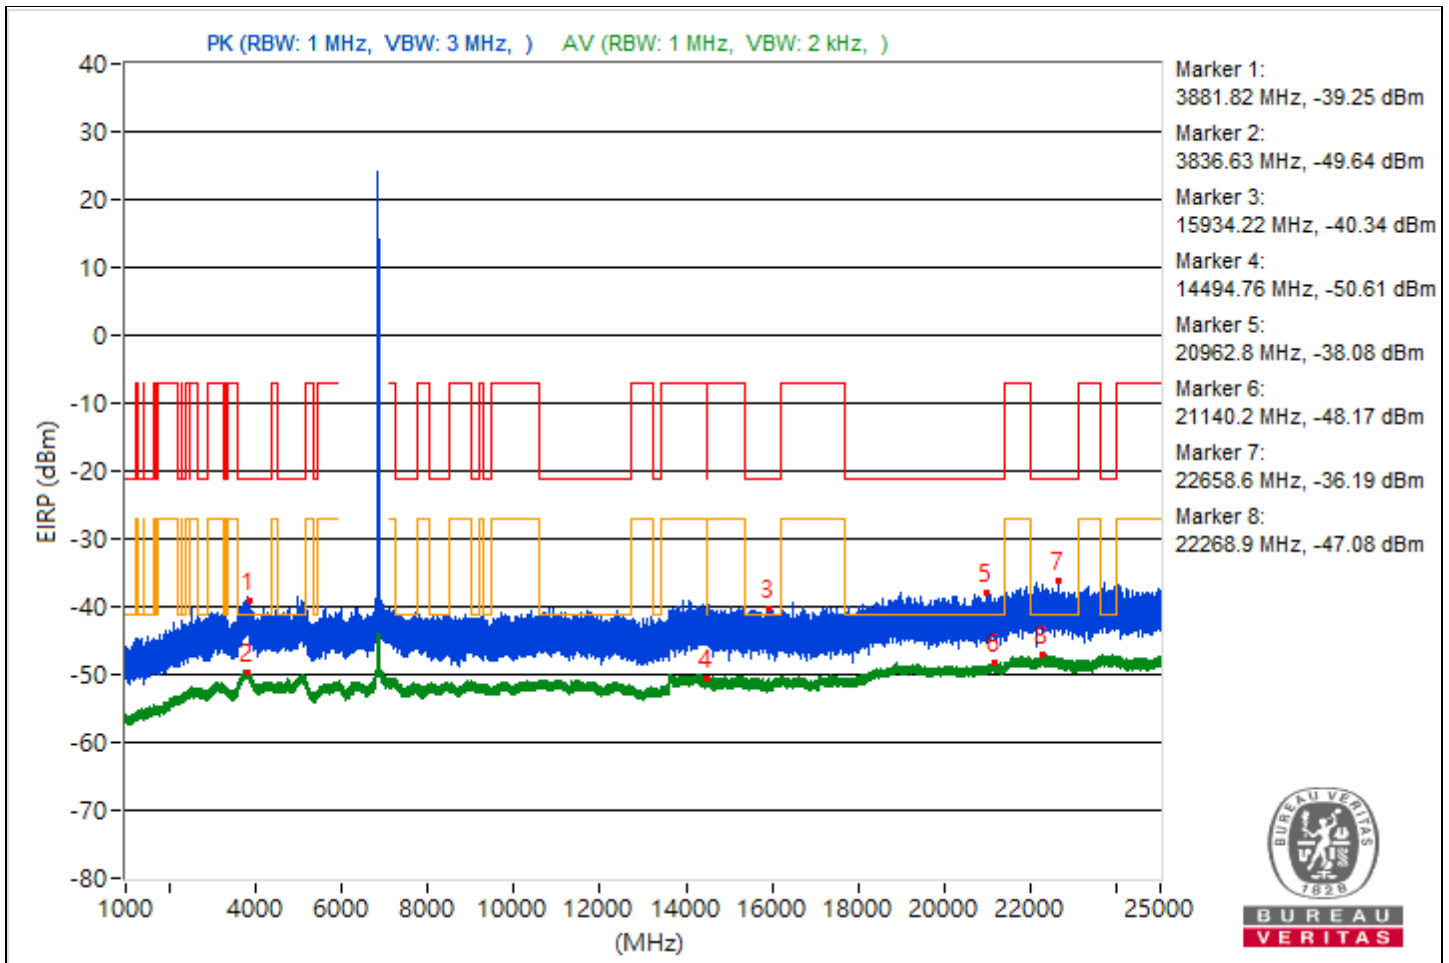

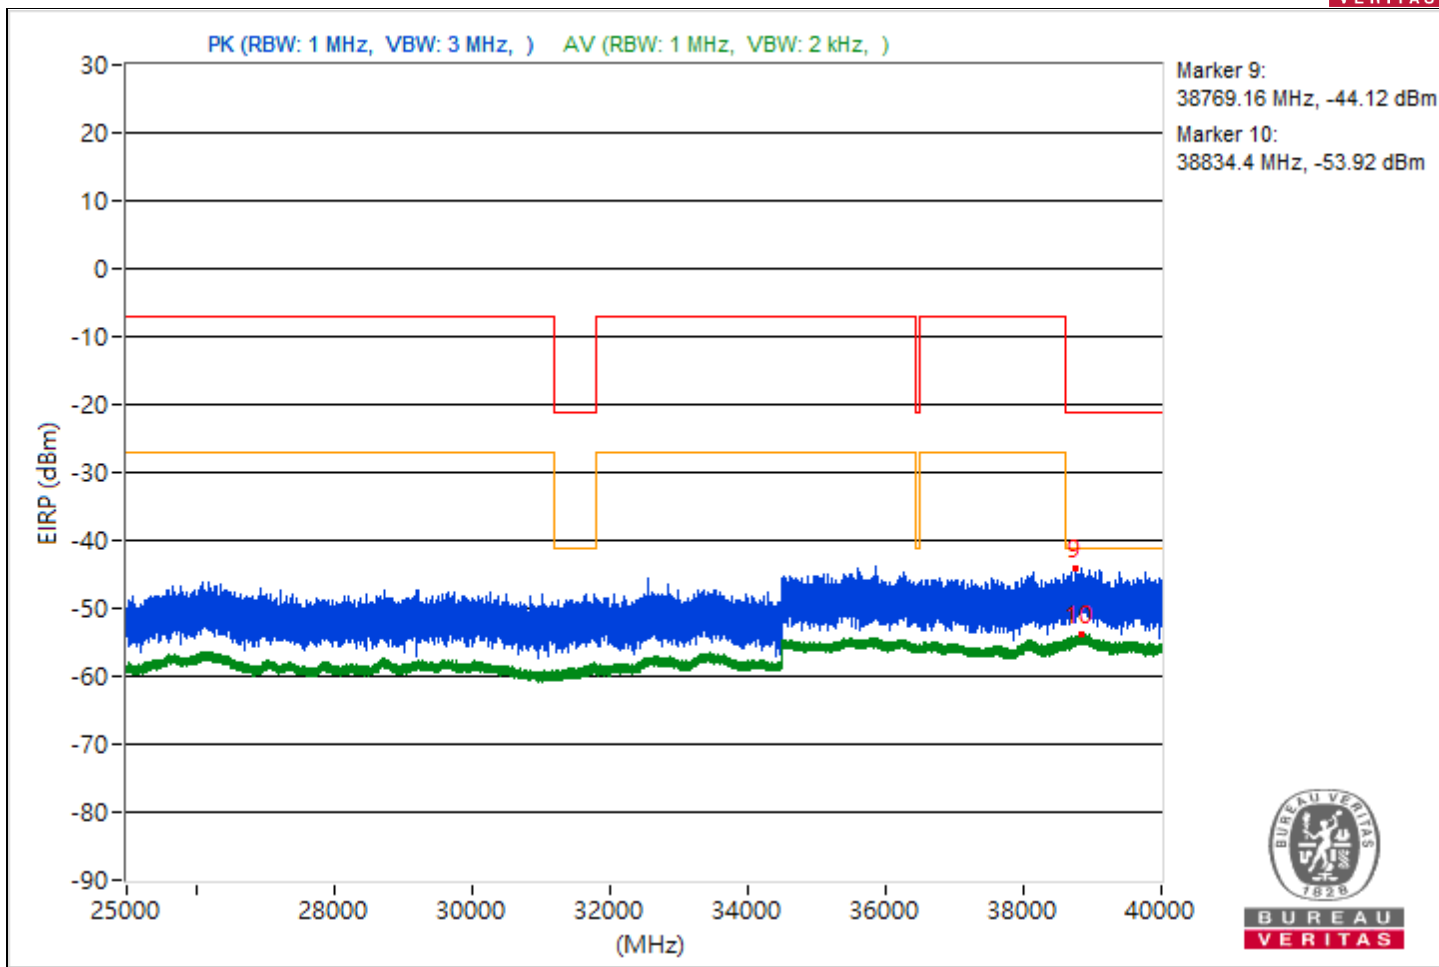





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772.16	55.88 PK	74	-18.12	-45.49	-50.51	4.92	-39.38
2	3822.71	45.94 AV	54	-8.06	-57.79	-56.77	4.92	-49.32
3	14473.07	55.14 PK	74	-18.86	-45.93	-52.36	4.92	-40.12
4	15584	44.66 AV	54	-9.34	-57.81	-59.4	4.92	-50.6
5	21178.9	56.85 PK	74	-17.15	-44.69	-49.03	4.92	-38.41
6	21167.1	46.78 AV	54	-7.22	-57.05	-55.85	4.92	-48.48
7	22524	58.11 PK	74	-15.89	-50.36	-42.77	4.92	-37.15
8	22421.9	48.26 AV	54	-5.74	-54.7	-55.18	4.92	-47
9	38899.82	51.52 PK	74	-22.48	-49.34	-57.06	4.92	-43.74
10	38875.02	41.49 AV	54	-12.51	-62.13	-61.32	4.92	-53.77

Note: Margin value = Emission Level - Limit value

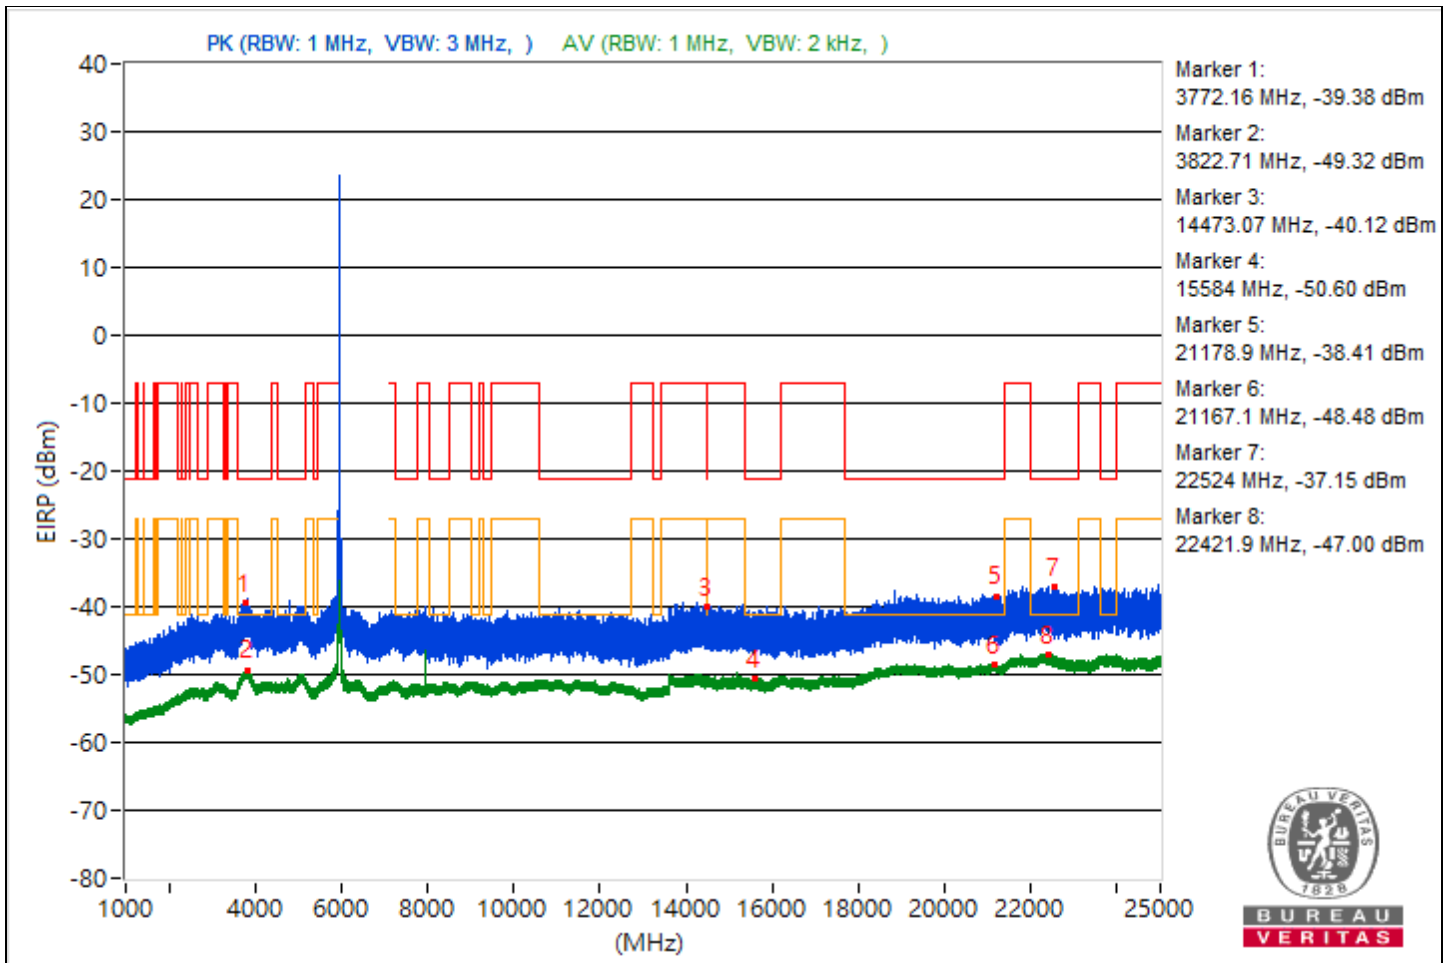

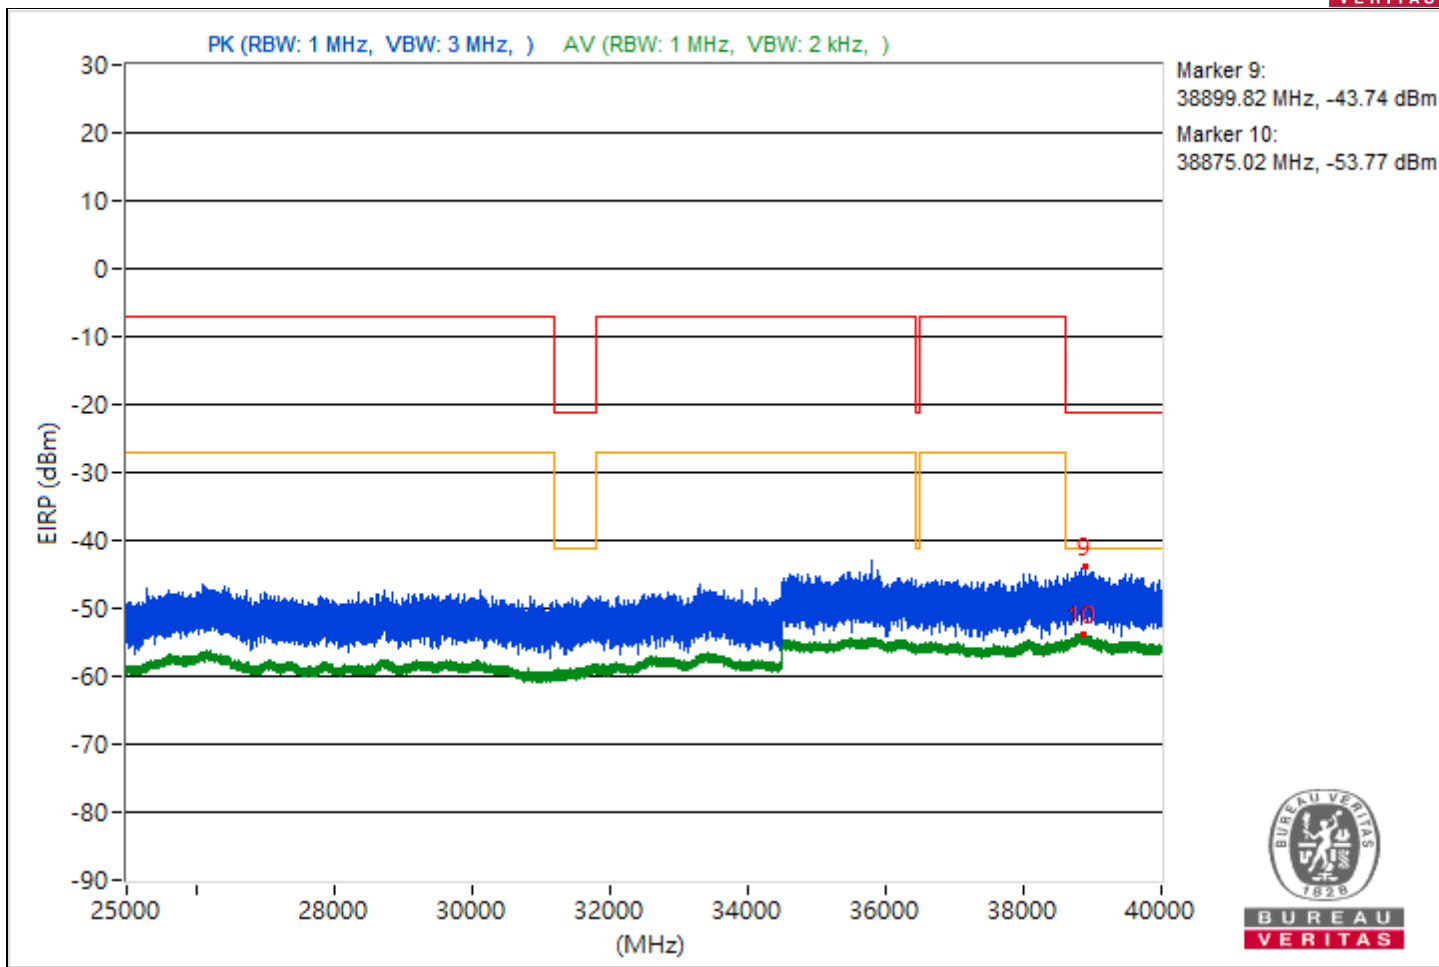





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.02	56.45 PK	74	-17.55	-44.5	-51.62	4.92	-38.81
2	3782.5	45.75 AV	54	-8.25	-57.92	-57.01	4.92	-49.51
3	15920.09	54.6 PK	74	-19.4	-53.61	-46.33	4.92	-40.66
4	14486.31	44.59 AV	54	-9.41	-59.31	-57.99	4.92	-50.67
5	19162.4	56.8 PK	74	-17.2	-44.38	-50.23	4.92	-38.46
6	21100.9	46.99 AV	54	-7.01	-55.8	-56.66	4.92	-48.27
7	22534.8	58.47 PK	74	-15.53	-46.72	-43.36	4.92	-36.79
8	22381.6	47.87 AV	54	-6.13	-56.44	-54.44	4.92	-47.39
9	38821.33	50.35 PK	74	-23.65	-56.76	-50.82	4.92	-44.91
10	38837.33	41.72 AV	54	-12.28	-61.65	-61.3	4.92	-53.54

Note: Margin value = Emission Level - Limit value

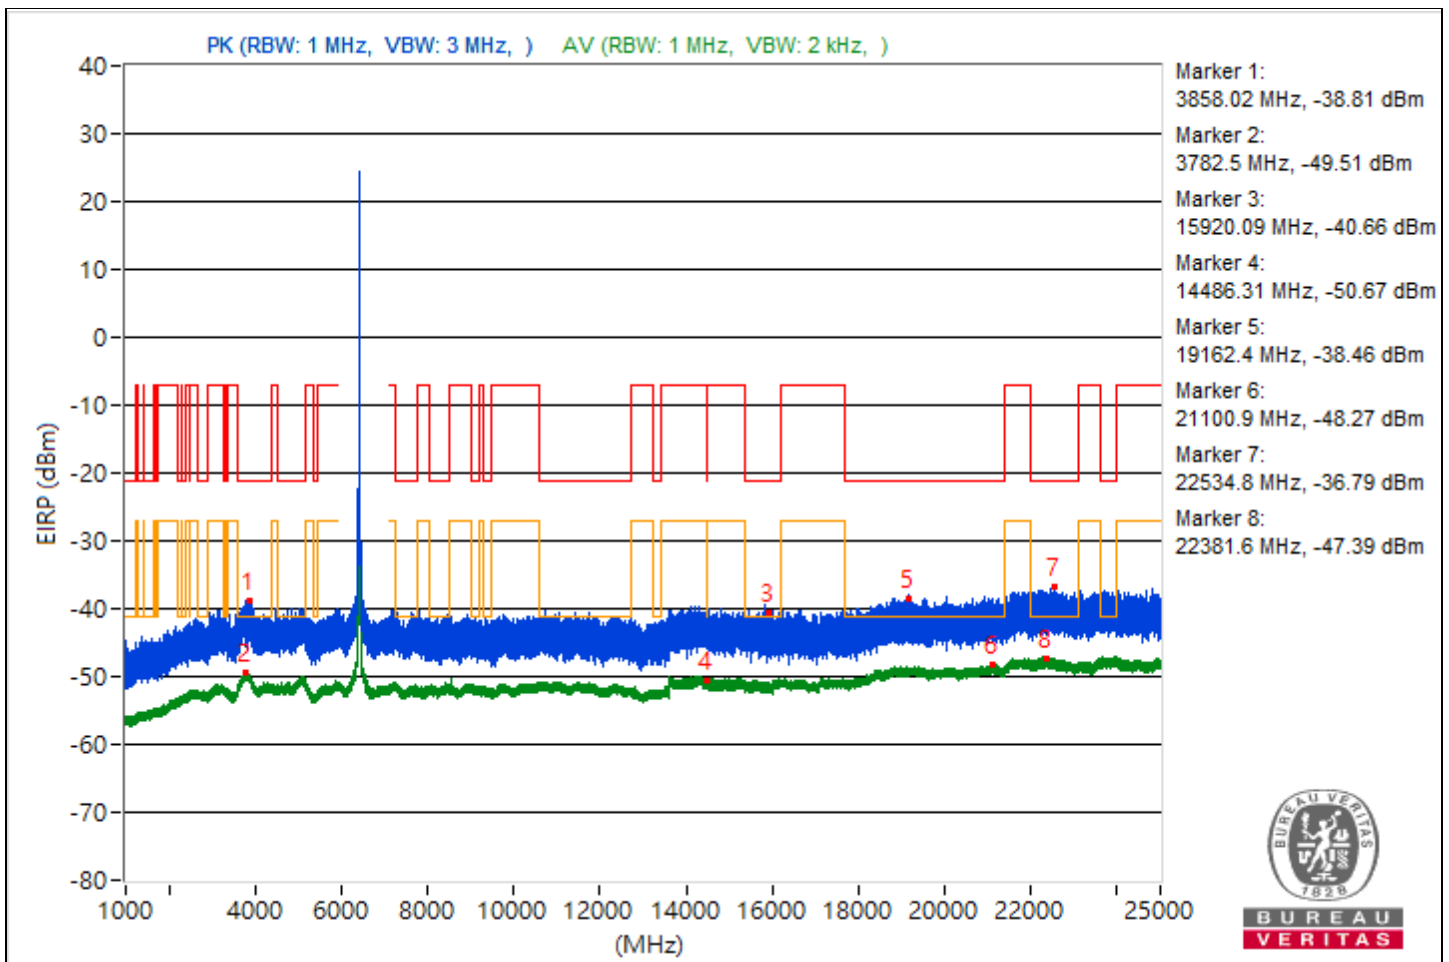

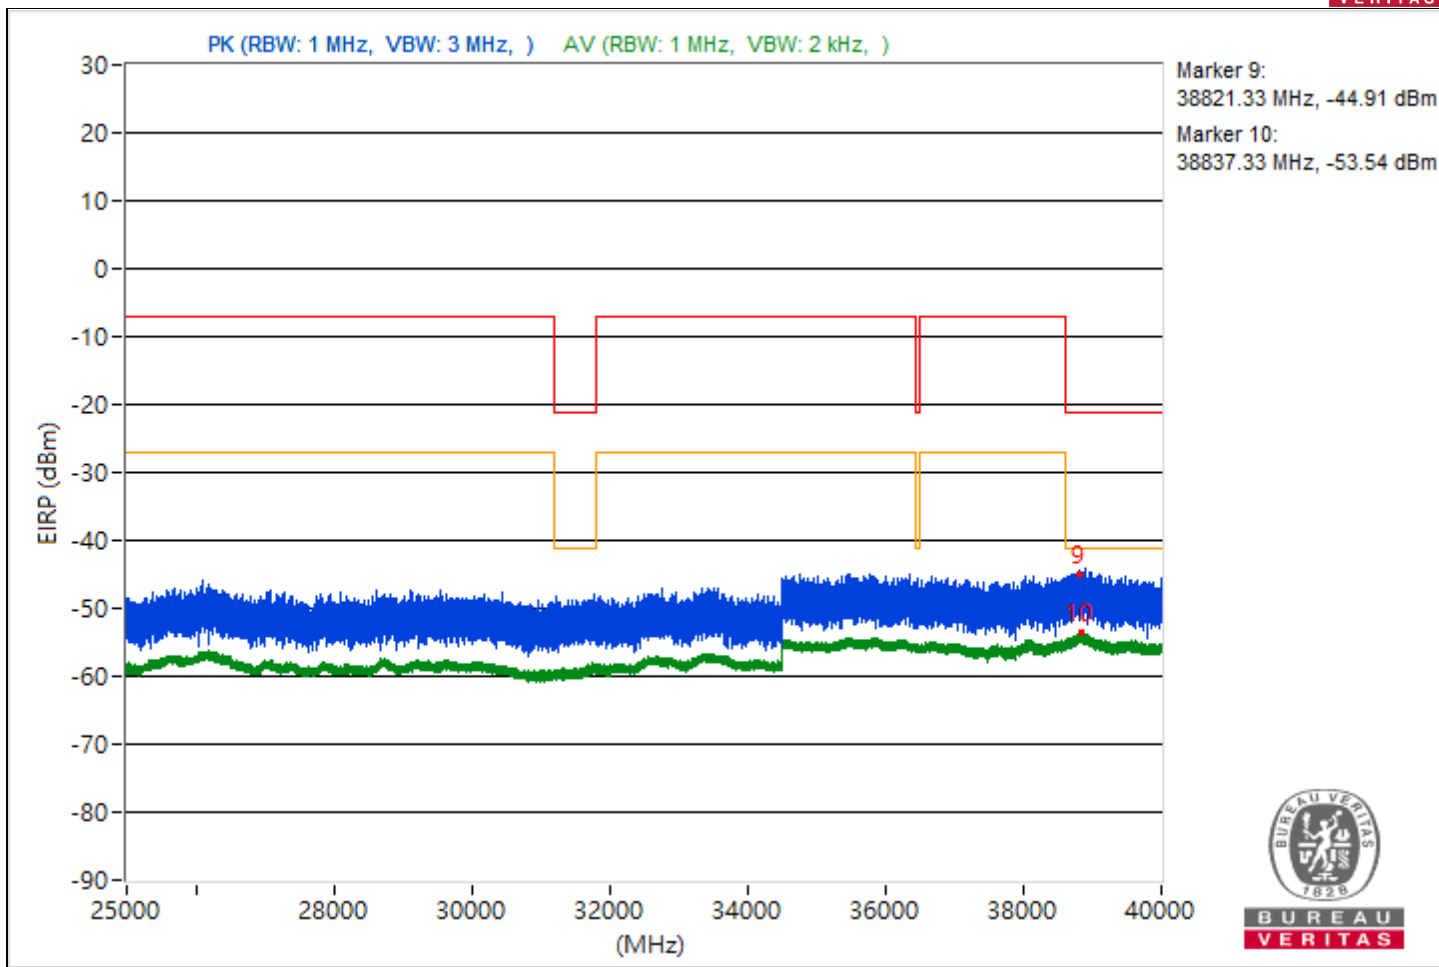





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.04	56.5 PK	74	-17.5	-48.5	-45.42	4.92	-38.76
2	3815.32	45.93 AV	54	-8.07	-57.85	-56.74	4.92	-49.33
3	15590.13	55.34 PK	74	-18.66	-46.13	-50.73	4.92	-39.92
4	15600.09	44.7 AV	54	-9.3	-58.95	-58.06	4.92	-50.56
5	18520.3	56.62 PK	74	-17.38	-44.22	-52.03	4.92	-38.64
6	21188.1	46.86 AV	54	-7.14	-56.02	-56.66	4.92	-48.4
7	23864.8	58.3 PK	74	-15.7	-50.42	-42.54	4.92	-36.96
8	23716.1	48.06 AV	54	-5.94	-54.7	-55.62	4.92	-47.2
9	39327.82	51.16 PK	74	-22.84	-56.7	-49.83	4.92	-44.1
10	38855.2	41.53 AV	54	-12.47	-61.19	-62.18	4.92	-53.73

Note: Margin value = Emission Level - Limit value

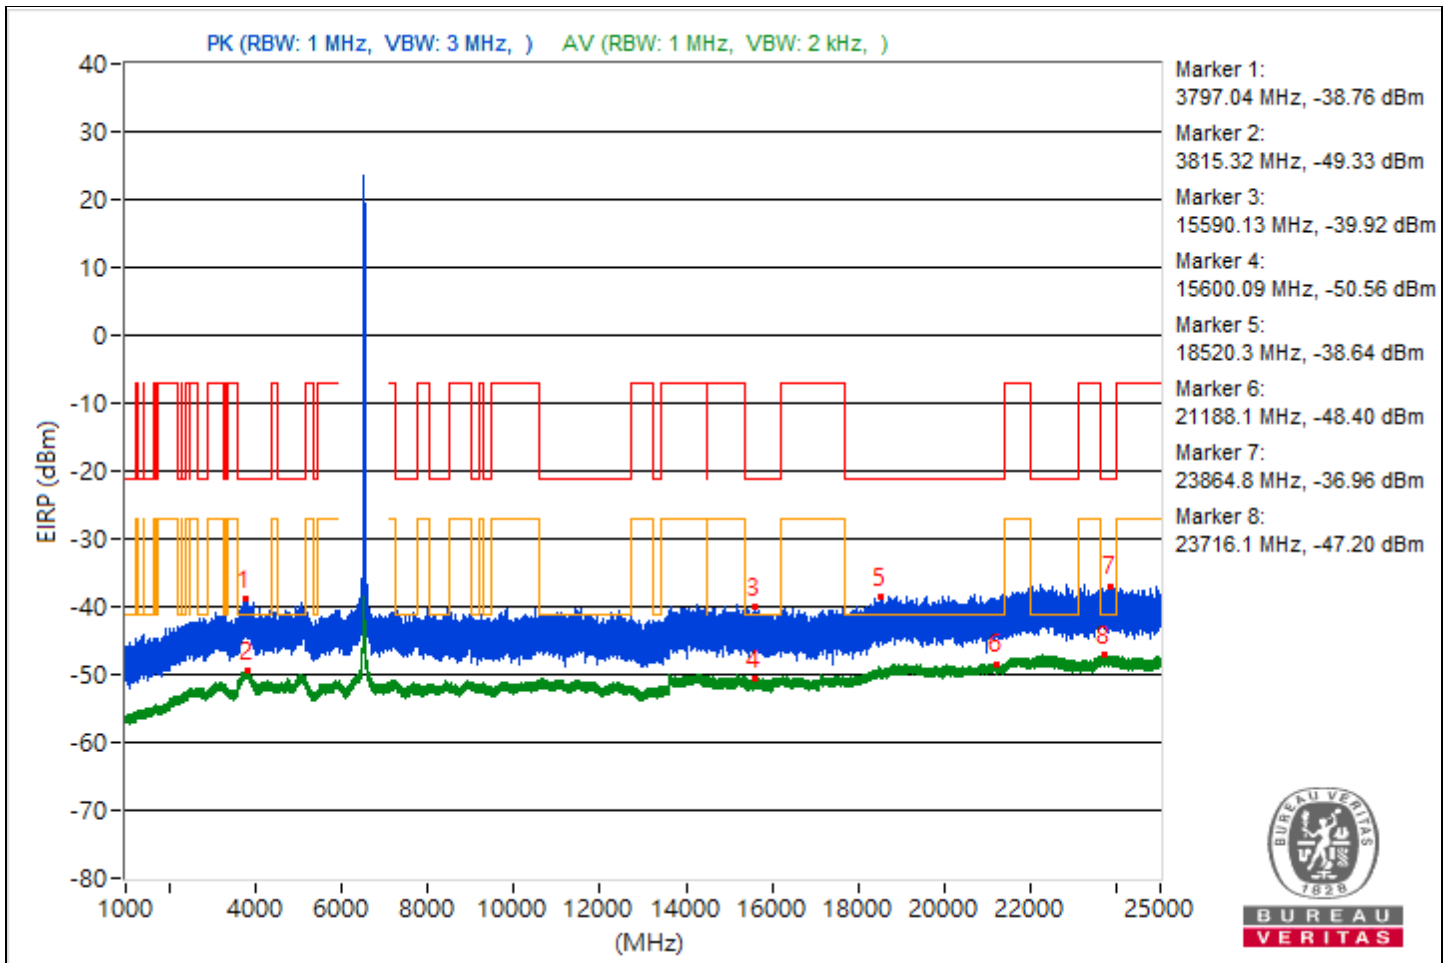

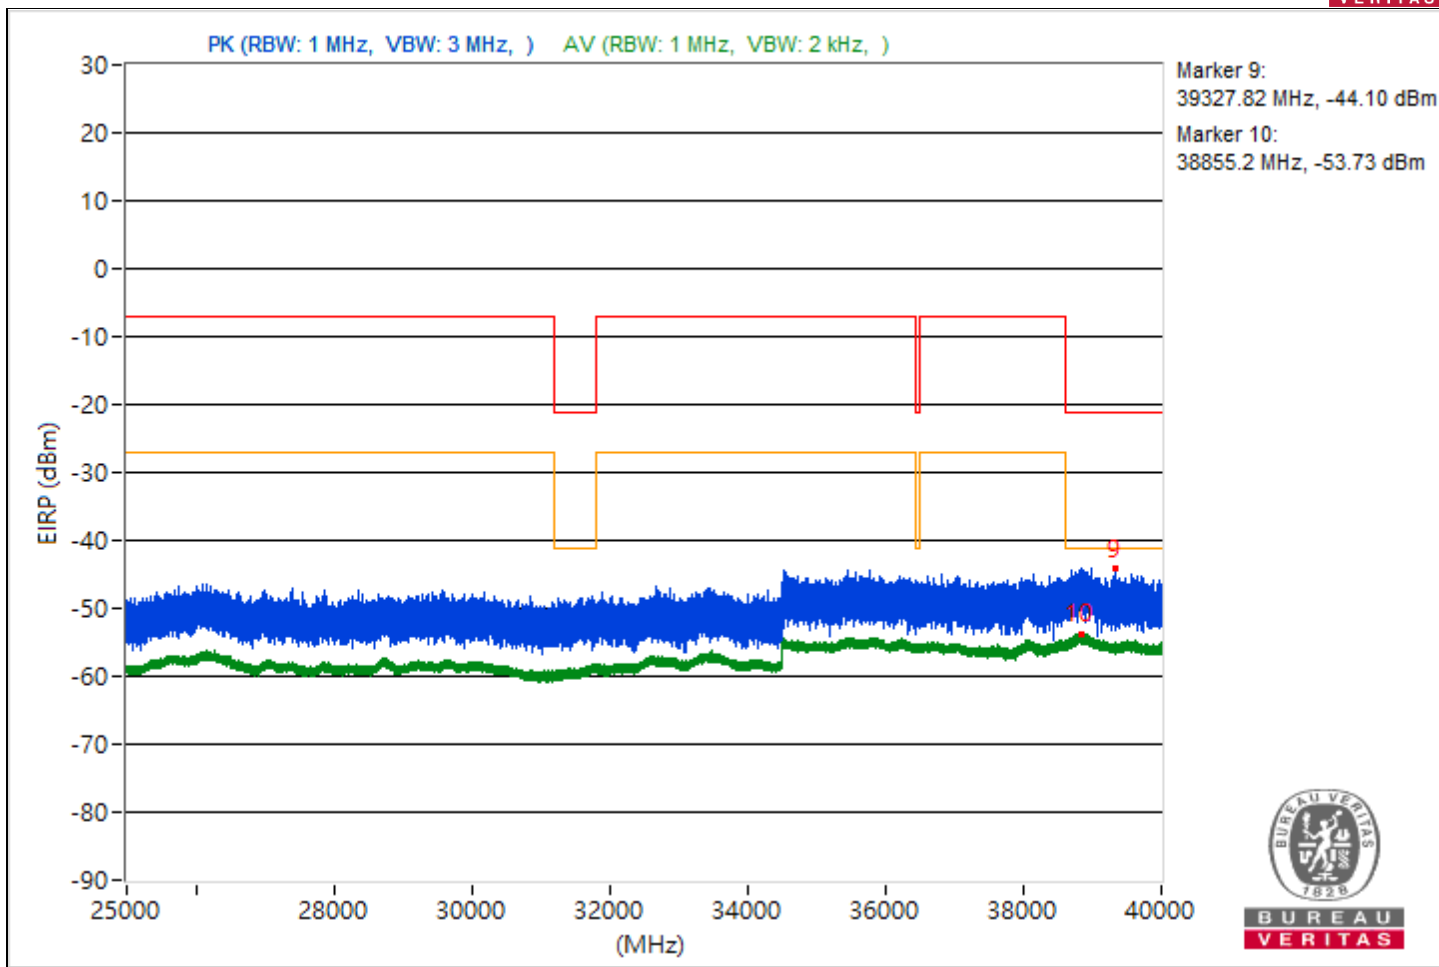





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3816.18	56.52 PK	74	-17.48	-47.54	-45.95	4.92	-38.74
2	3835	45.78 AV	54	-8.22	-56.94	-57.93	4.92	-49.48
3	7257.14	54.47 PK	74	-19.53	-52.48	-46.73	4.92	-40.79
4	14476.98	44.97 AV	54	-9.03	-58.04	-58.4	4.92	-50.29
5	20510.3	57.3 PK	74	-16.7	-44.32	-48.36	4.92	-37.96
6	21175.7	46.61 AV	54	-7.39	-55.99	-57.25	4.92	-48.65
7	22265.4	58.07 PK	74	-15.93	-49.97	-42.89	4.92	-37.19
8	23709.9	47.95 AV	54	-6.05	-54.73	-55.82	4.92	-47.31
9	38854.22	51.23 PK	74	-22.77	-50.62	-53.91	4.92	-44.03
10	38858.58	41.29 AV	54	-12.71	-61.19	-62.73	4.92	-53.97

Note: Margin value = Emission Level - Limit value

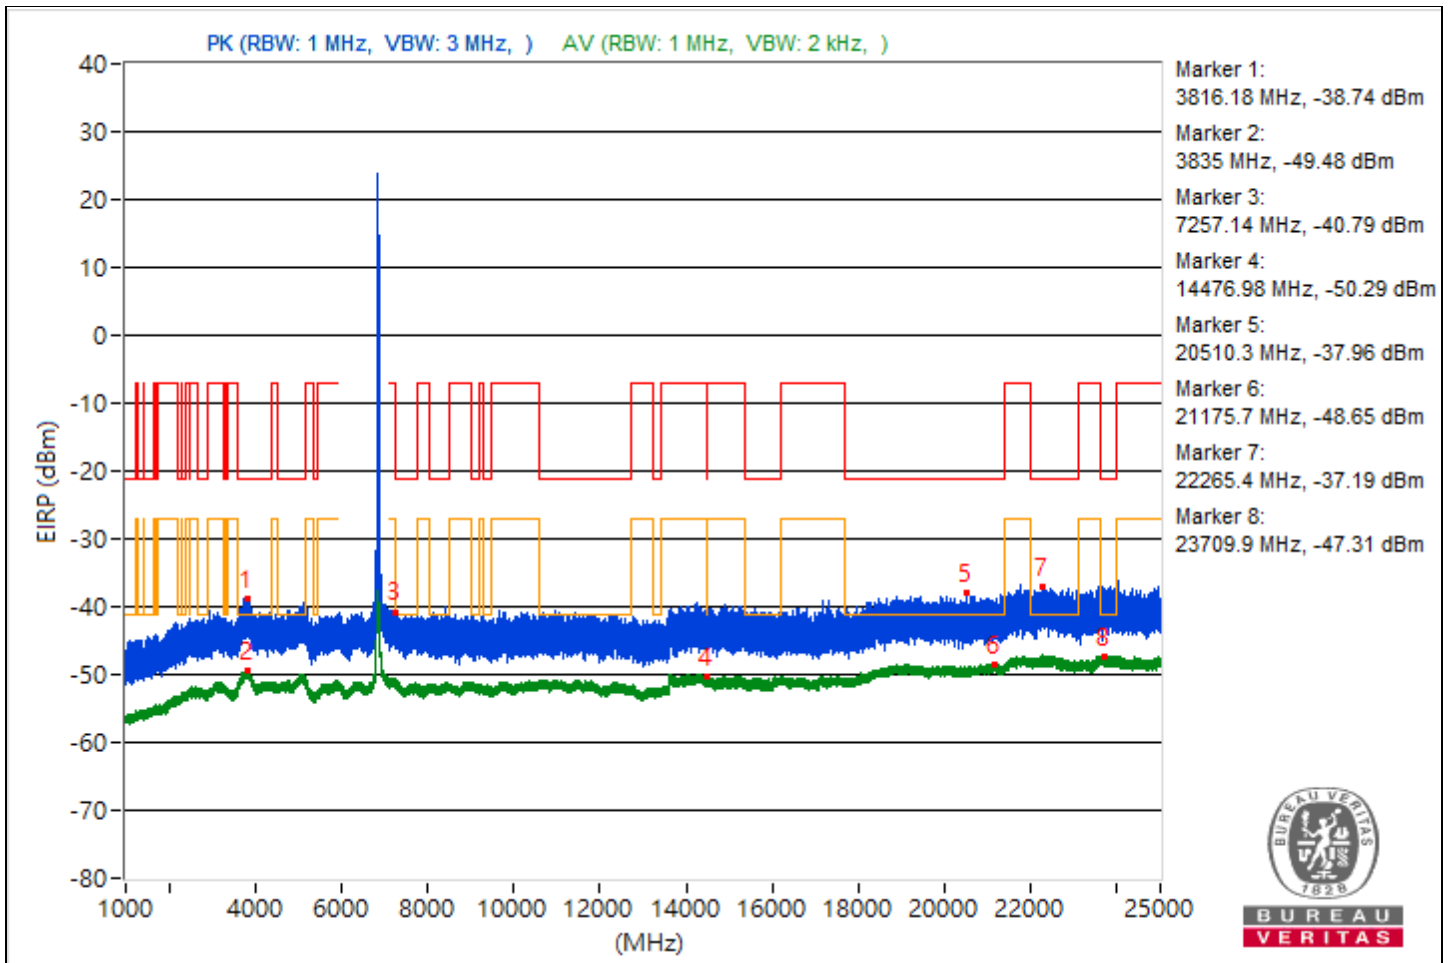


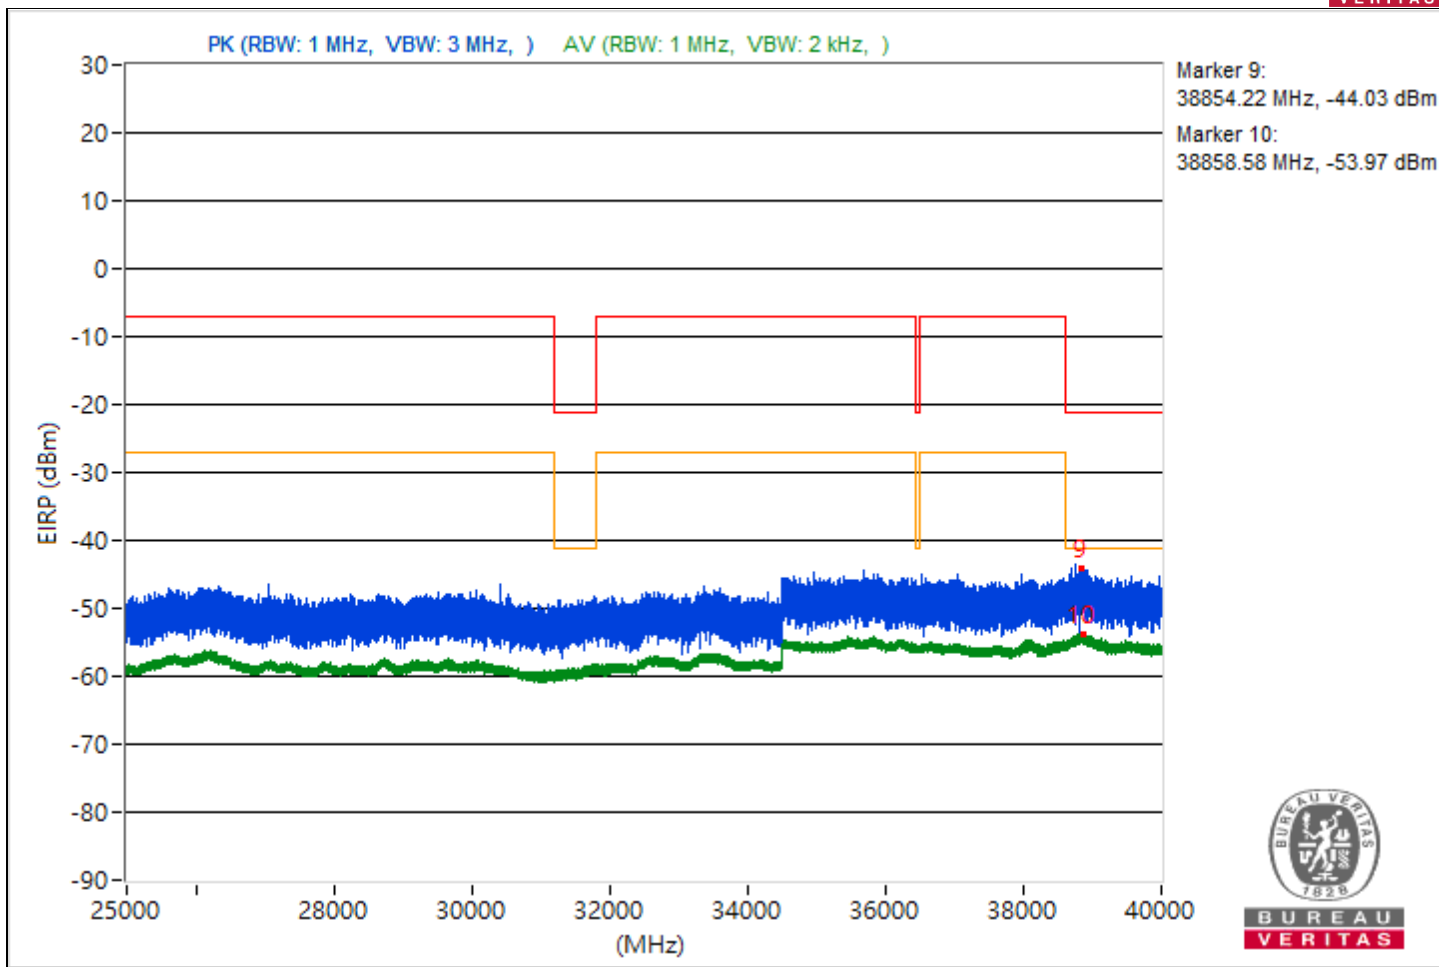


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3724.24	56.01 PK	74	-17.99	-49.63	-45.62	4.92	-39.25
2	3828.23	45.91 AV	54	-8.09	-57.6	-56.98	4.92	-49.35
3	15645.16	55.21 PK	74	-18.79	-51.63	-46.03	4.92	-40.05
4	14489.33	44.62 AV	54	-9.38	-59.32	-57.94	4.92	-50.64
5	19276.1	57.29 PK	74	-16.71	-43.86	-49.9	4.92	-37.97
6	21112.3	46.74 AV	54	-7.26	-56.99	-55.97	4.92	-48.52
7	22703.7	58.87 PK	74	-15.13	-46.84	-42.74	4.92	-36.39
8	22270.4	48.12 AV	54	-5.88	-55.82	-54.43	4.92	-47.14
9	38977.42	50.36 PK	74	-23.64	-55.53	-51.17	4.92	-44.9
10	38868.09	41.58 AV	54	-12.42	-61.82	-61.4	4.92	-53.68

Note: Margin value = Emission Level - Limit value

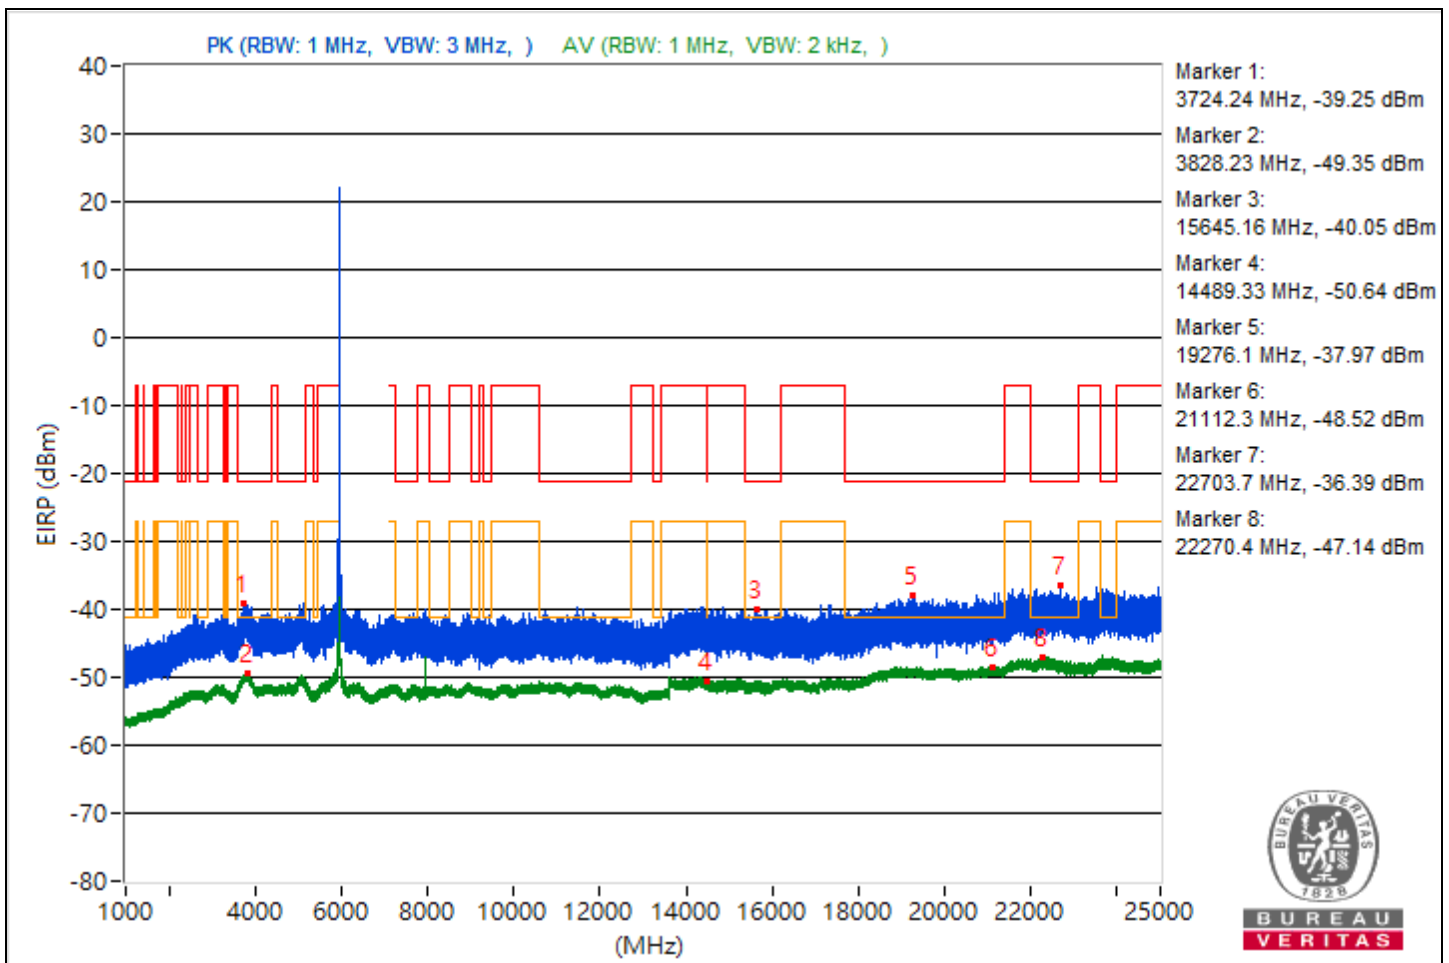


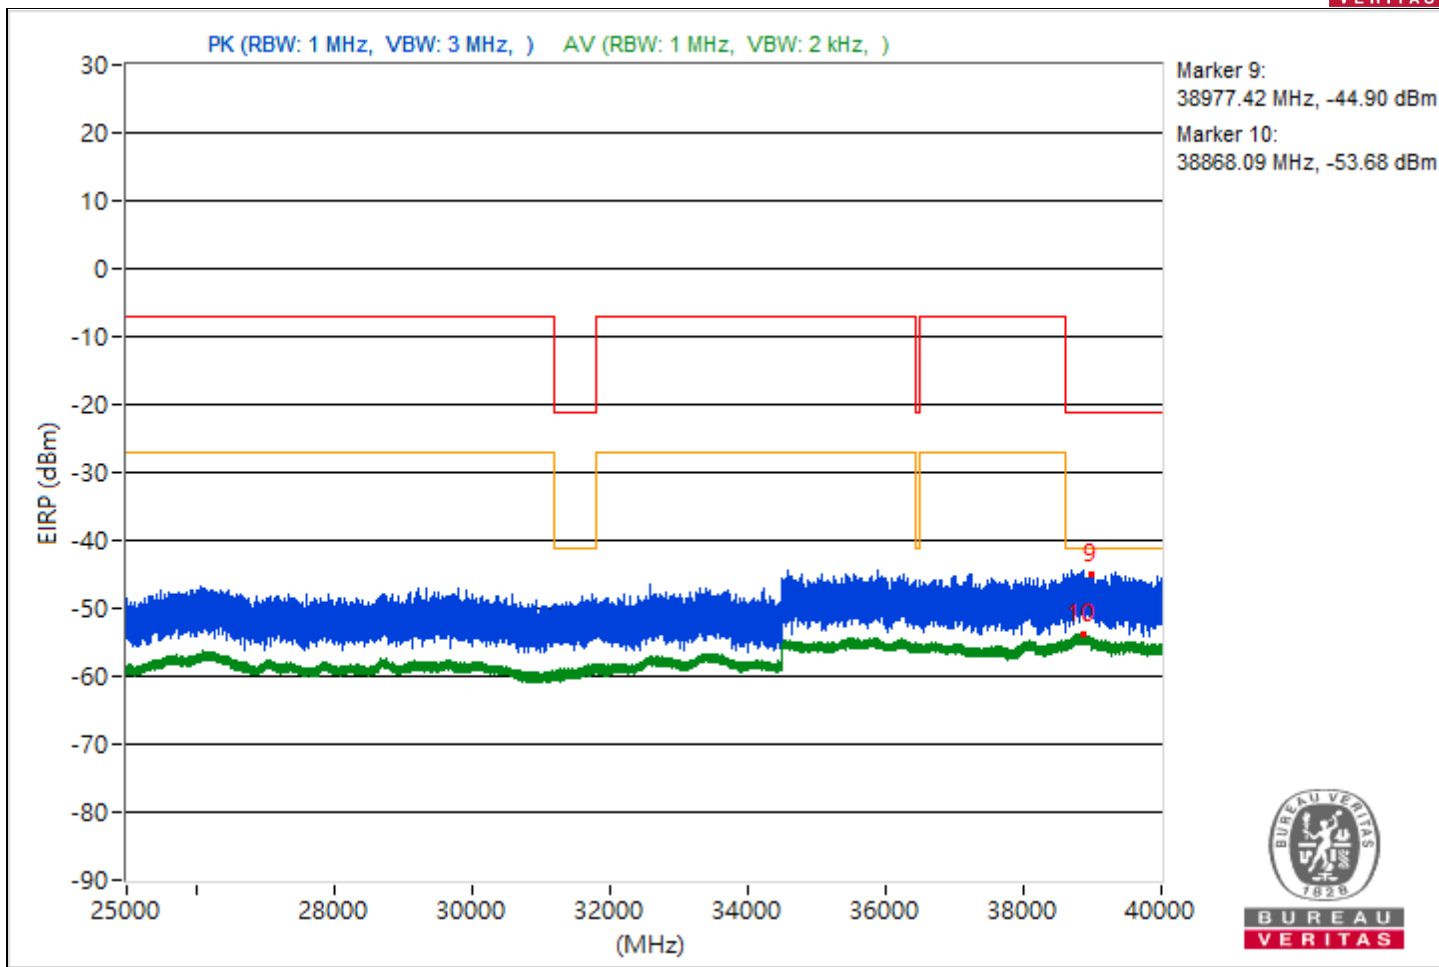


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.92	56.43 PK	74	-17.57	-49.07	-45.26	4.92	-38.83
2	3843.17	45.74 AV	54	-8.26	-57.12	-57.8	4.92	-49.52
3	14472.53	55.71 PK	74	-18.29	-45.75	-50.39	4.92	-39.55
4	15596.27	44.74 AV	54	-9.26	-57.98	-58.98	4.92	-50.52
5	20012.1	57.1 PK	74	-16.9	-50.25	-44	4.92	-38.16
6	21087.8	46.54 AV	54	-7.46	-56.08	-57.3	4.92	-48.72
7	23708.7	59.69 PK	74	-14.31	-46.89	-41.62	4.92	-35.57
8	22500.1	47.98 AV	54	-6.02	-55.72	-54.76	4.92	-47.28
9	39126.49	50.67 PK	74	-23.33	-50.36	-57.01	4.92	-44.59
10	38834.76	41.33 AV	54	-12.67	-62.31	-61.46	4.92	-53.93

Note: Margin value = Emission Level - Limit value

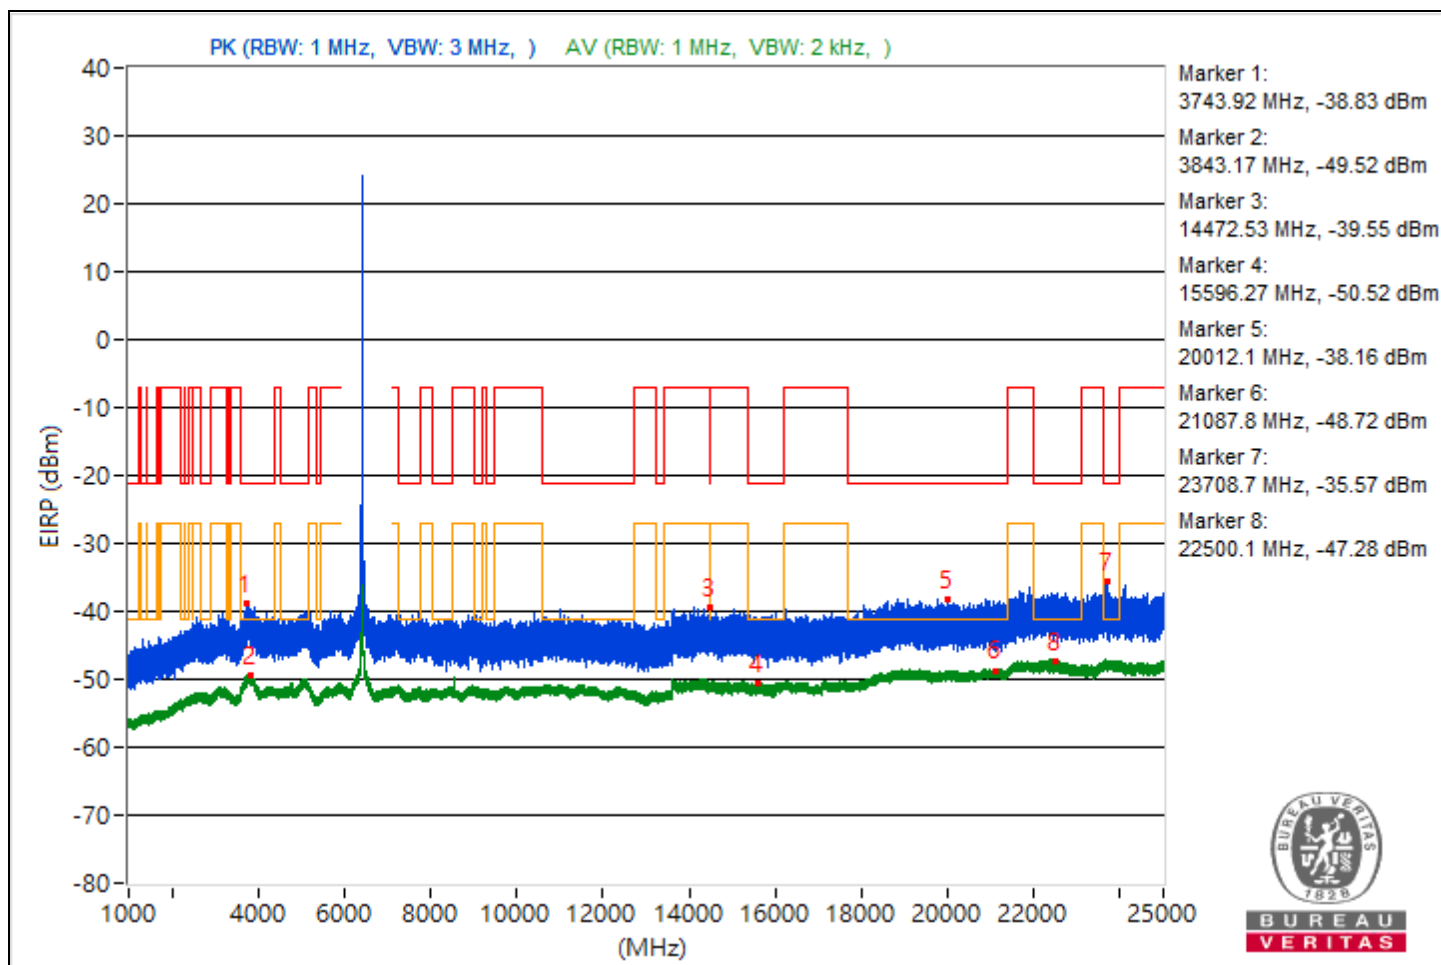


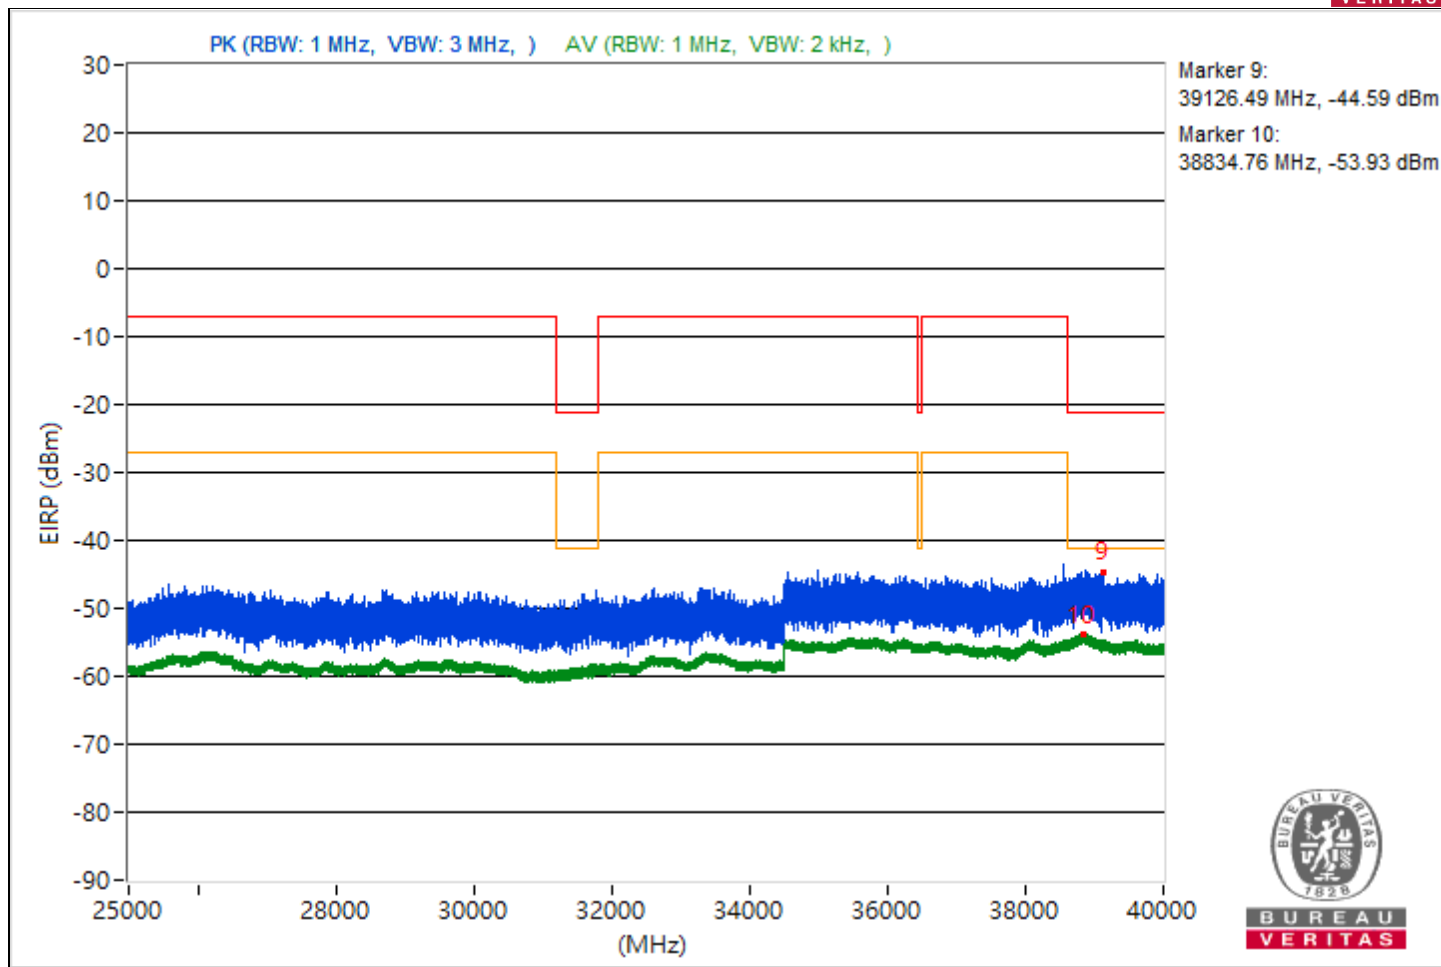


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5062.1	55.72 PK	74	-18.28	-49.91	-45.92	4.92	-39.54
2	3771.07	45.7 AV	54	-8.3	-56.91	-58.16	4.92	-49.56
3	10778.58	54.77 PK	74	-19.23	-46.98	-50.6	4.92	-40.49
4	14485.16	44.59 AV	54	-9.41	-59.32	-57.98	4.92	-50.67
5	18866.2	56.5 PK	74	-17.5	-44.7	-50.48	4.92	-38.76
6	21138.8	46.75 AV	54	-7.25	-55.92	-57.02	4.92	-48.51
7	23702.4	58.85 PK	74	-15.15	-46.85	-42.76	4.92	-36.41
8	22329.6	47.89 AV	54	-6.11	-56.03	-54.67	4.92	-47.37
9	38652.98	51.49 PK	74	-22.51	-49.53	-56.26	4.92	-43.77
10	38831.91	41.31 AV	54	-12.69	-62.62	-61.25	4.92	-53.95

Note: Margin value = Emission Level - Limit value

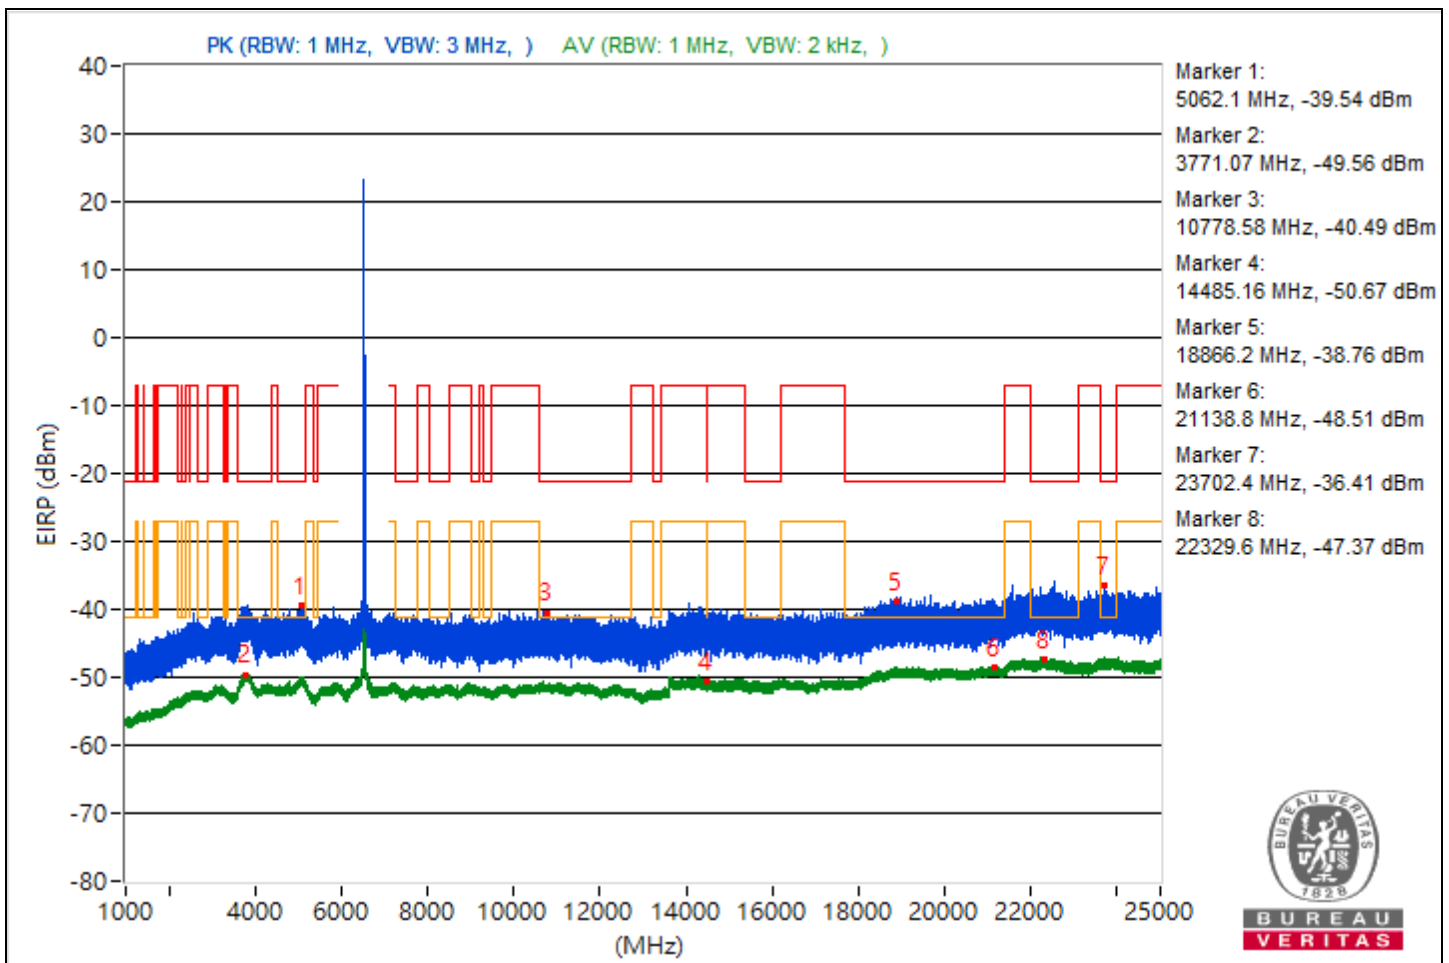


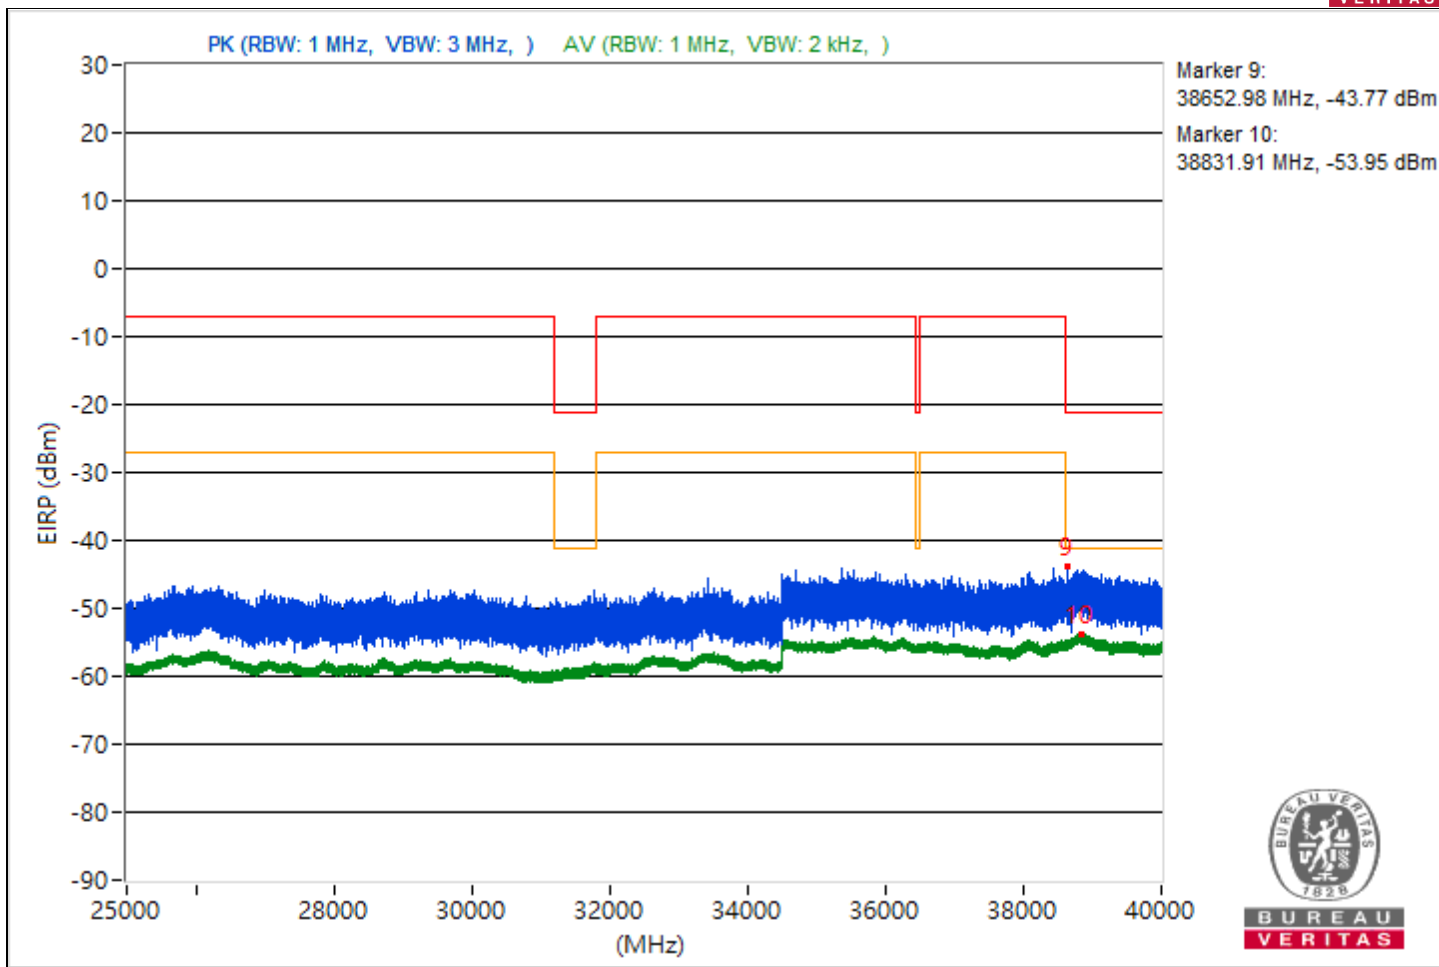


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3718.96	55.26 PK	74	-18.74	-45.88	-51.94	4.92	-40
2	3779.93	45.85 AV	54	-8.15	-57.67	-57.03	4.92	-49.41
3	11472.18	54.82 PK	74	-19.18	-50.84	-46.81	4.92	-40.44
4	14483.91	44.91 AV	54	-9.09	-58.56	-58.01	4.92	-50.35
5	20715.3	57.38 PK	74	-16.62	-50.29	-43.66	4.92	-37.88
6	21074.2	46.74 AV	54	-7.26	-55.91	-57.05	4.92	-48.52
7	22436.4	58.75 PK	74	-15.25	-46.71	-42.95	4.92	-36.51
8	23897.9	47.9 AV	54	-6.1	-55.84	-54.81	4.92	-47.36
9	38858.4	51.5 PK	74	-22.5	-57.05	-49.36	4.92	-43.76
10	38825.07	41.53 AV	54	-12.47	-62.02	-61.33	4.92	-53.73

Note: Margin value = Emission Level - Limit value

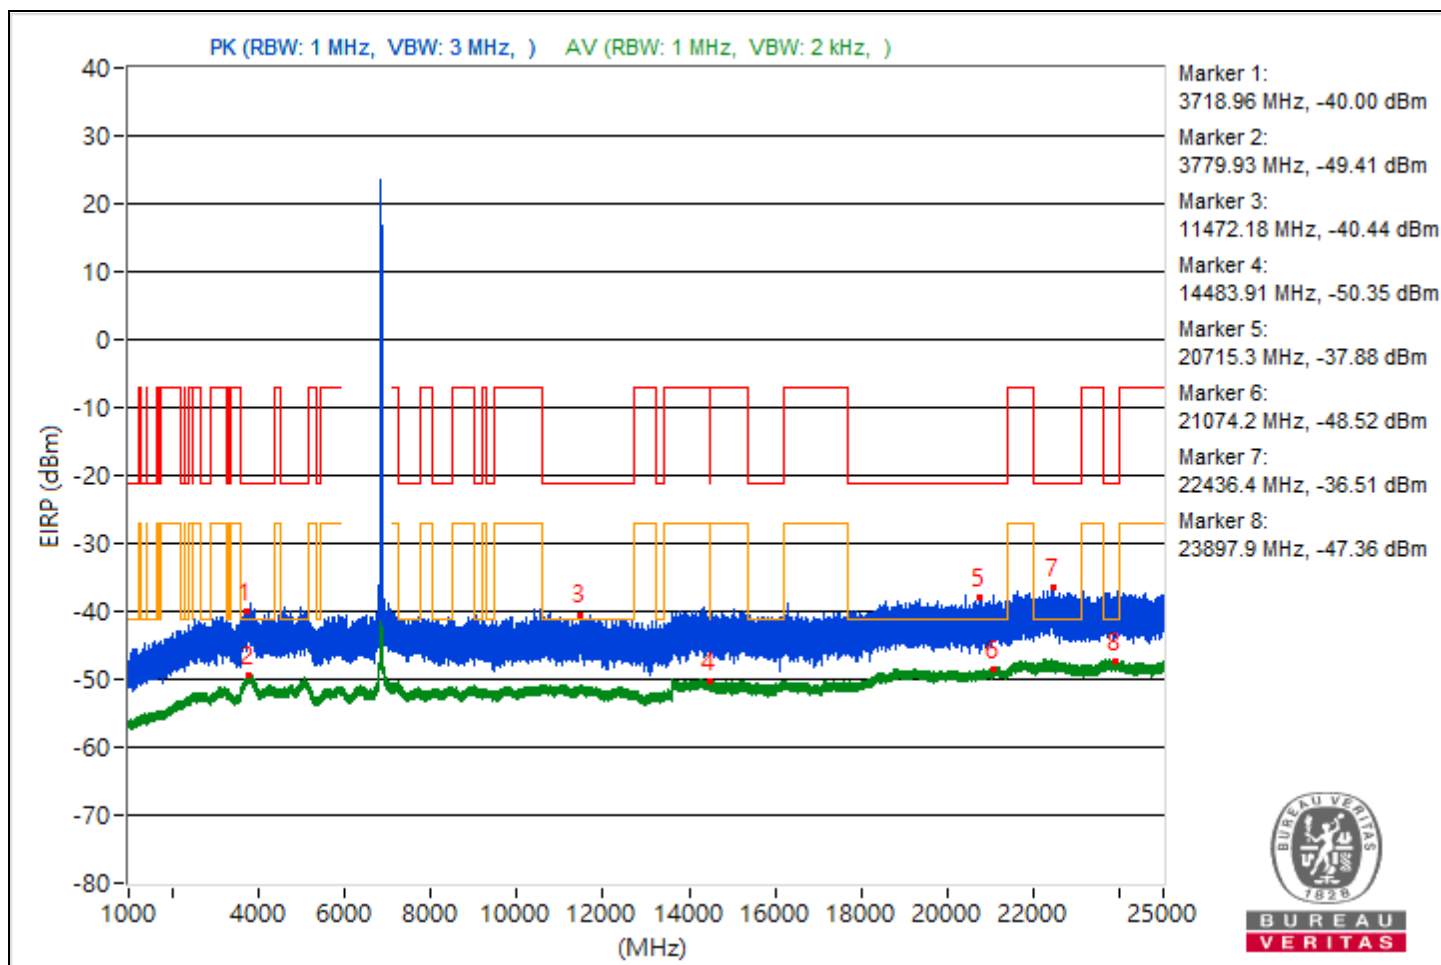


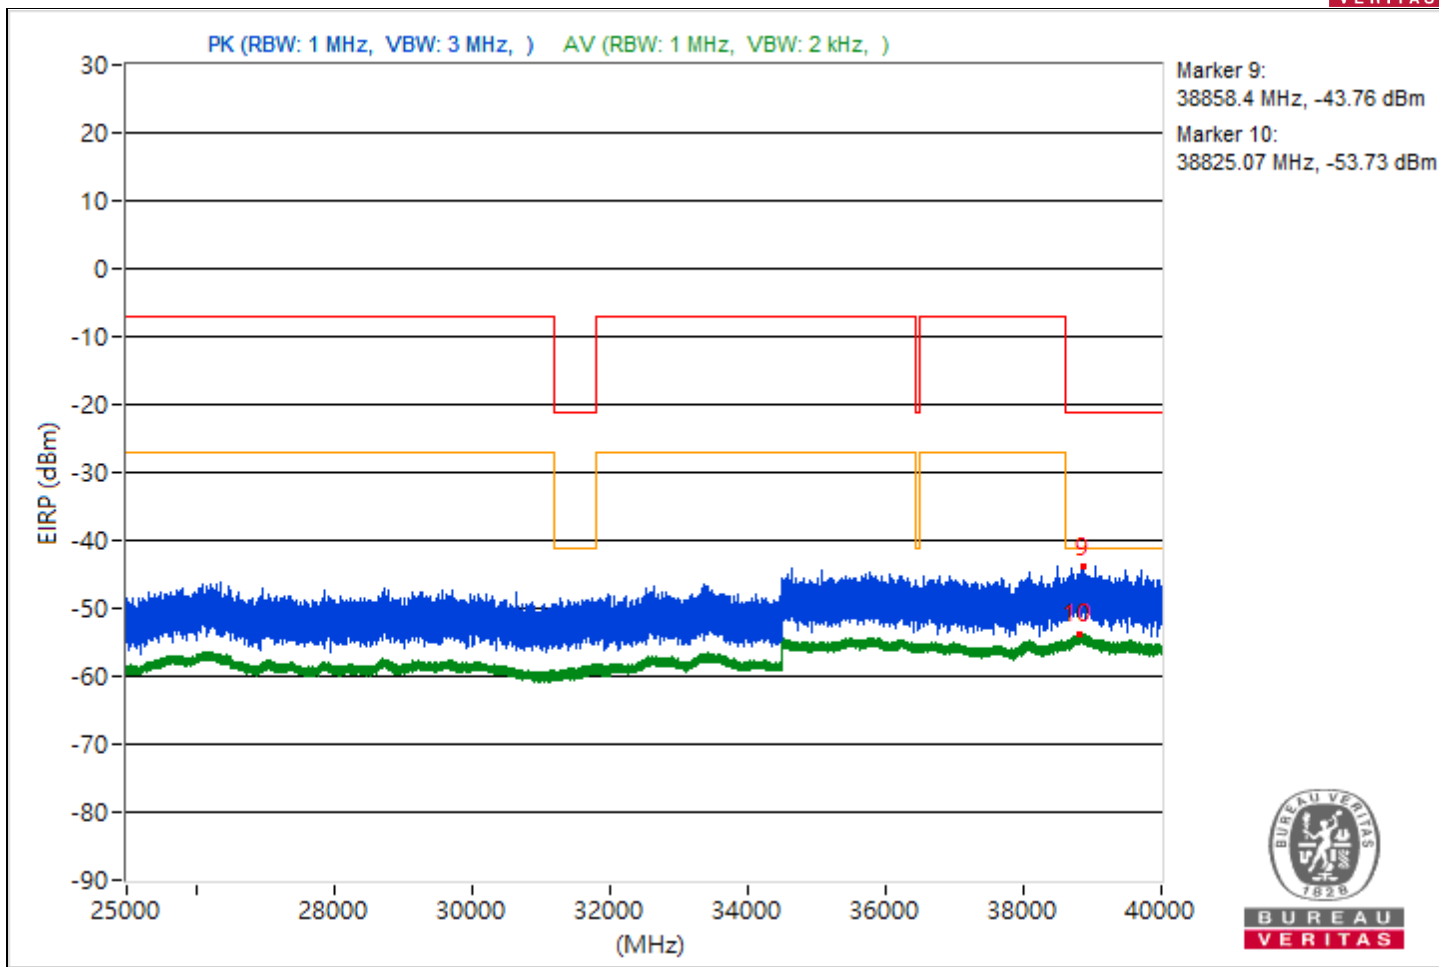


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.96	56.6 PK	74	-17.4	-45.6	-47.9	4.92	-38.66
2	3797.74	45.94 AV	54	-8.06	-57.37	-57.14	4.92	-49.32
3	11423.29	54.6 PK	74	-19.4	-46.6	-52.37	4.92	-40.66
4	15612.8	45.01 AV	54	-8.99	-58.42	-57.95	4.92	-50.25
5	19540	58.14 PK	74	-15.86	-42.8	-50.01	4.92	-37.12
6	21180.1	46.68 AV	54	-7.32	-55.92	-57.19	4.92	-48.58
7	22415.3	59.05 PK	74	-14.95	-42.34	-47.26	4.92	-36.21
8	23775.7	48.05 AV	54	-5.95	-54.8	-55.52	4.92	-47.21
9	38879.64	50.97 PK	74	-23.03	-49.82	-58.04	4.92	-44.29
10	38873.24	41.25 AV	54	-12.75	-61.34	-62.64	4.92	-54.01

Note: Margin value = Emission Level - Limit value

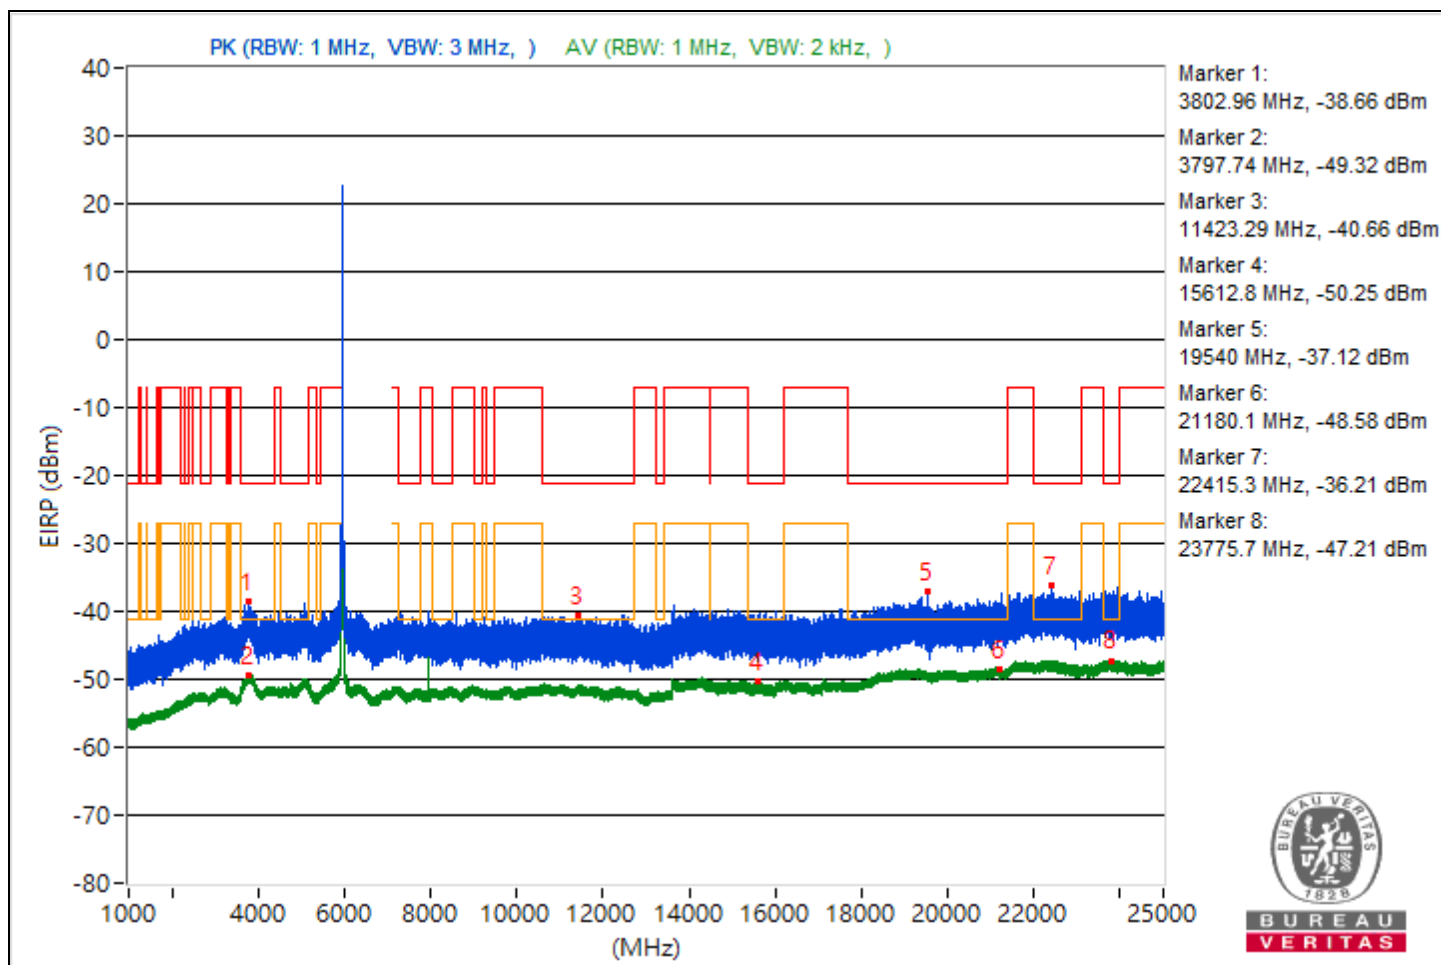


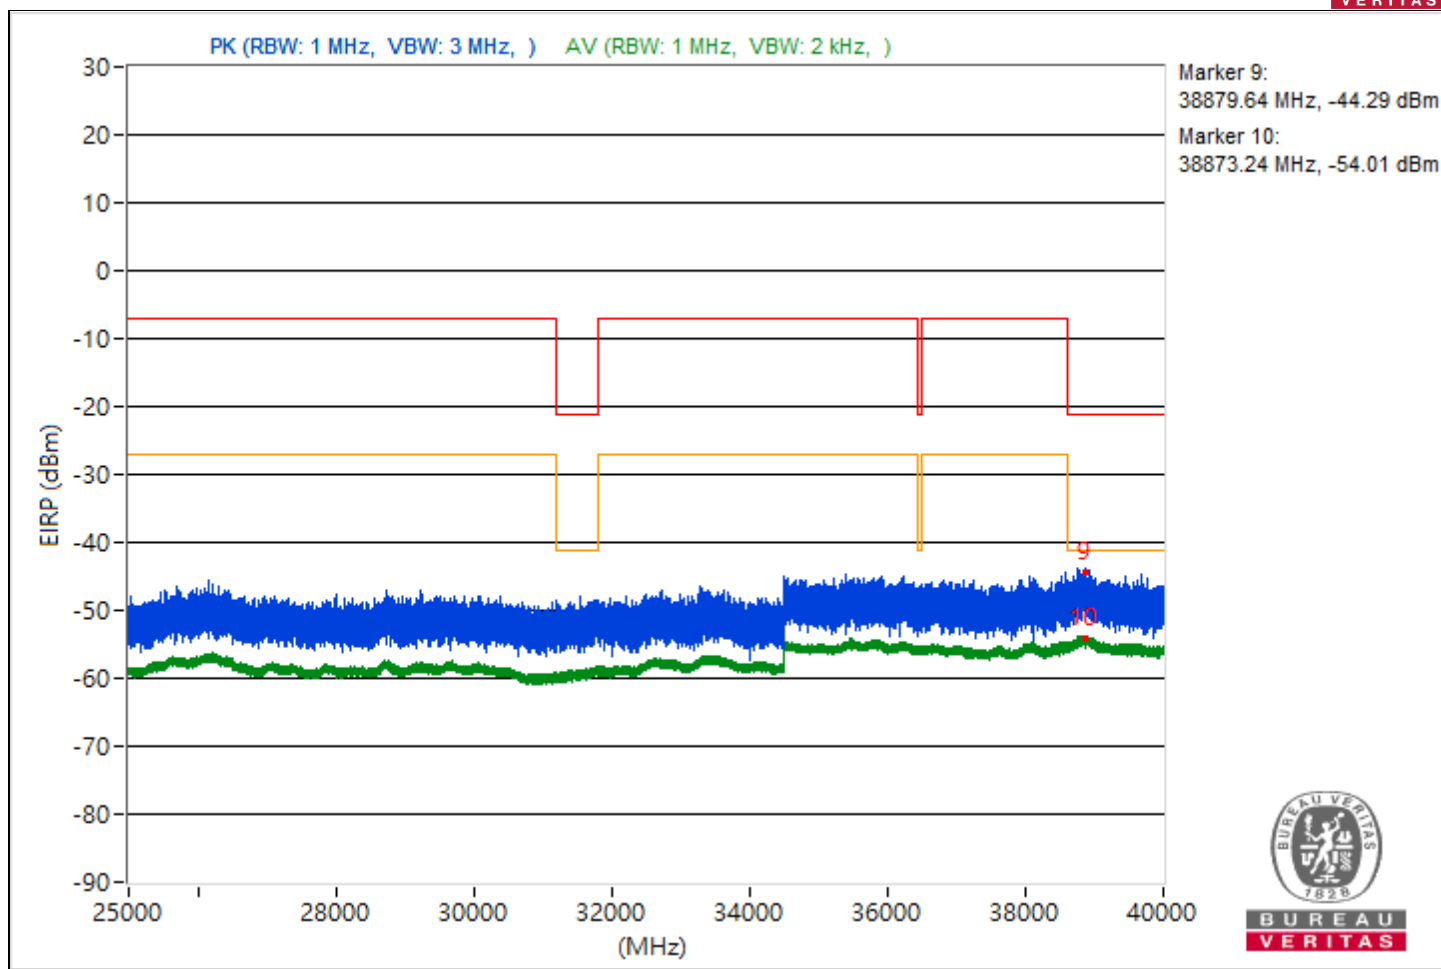


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.88	56.19 PK	74	-17.81	-47.74	-46.38	4.92	-39.07
2	3806.92	45.89 AV	54	-8.11	-57.88	-56.8	4.92	-49.37
3	8060.62	55.39 PK	74	-18.61	-45.8	-51.62	4.92	-39.87
4	15707.29	44.56 AV	54	-9.44	-57.95	-59.44	4.92	-50.7
5	19312.1	57.78 PK	74	-16.22	-44.16	-47.16	4.92	-37.48
6	21106.2	46.78 AV	54	-7.22	-55.79	-57.12	4.92	-48.48
7	22012.9	58.46 PK	74	-15.54	-43.68	-46.12	4.92	-36.8
8	22254	48.04 AV	54	-5.96	-55.8	-54.59	4.92	-47.22
9	38937.51	51.02 PK	74	-22.98	-54.86	-50.52	4.92	-44.24
10	38887.29	41.46 AV	54	-12.54	-62.24	-61.27	4.92	-53.8

Note: Margin value = Emission Level - Limit value

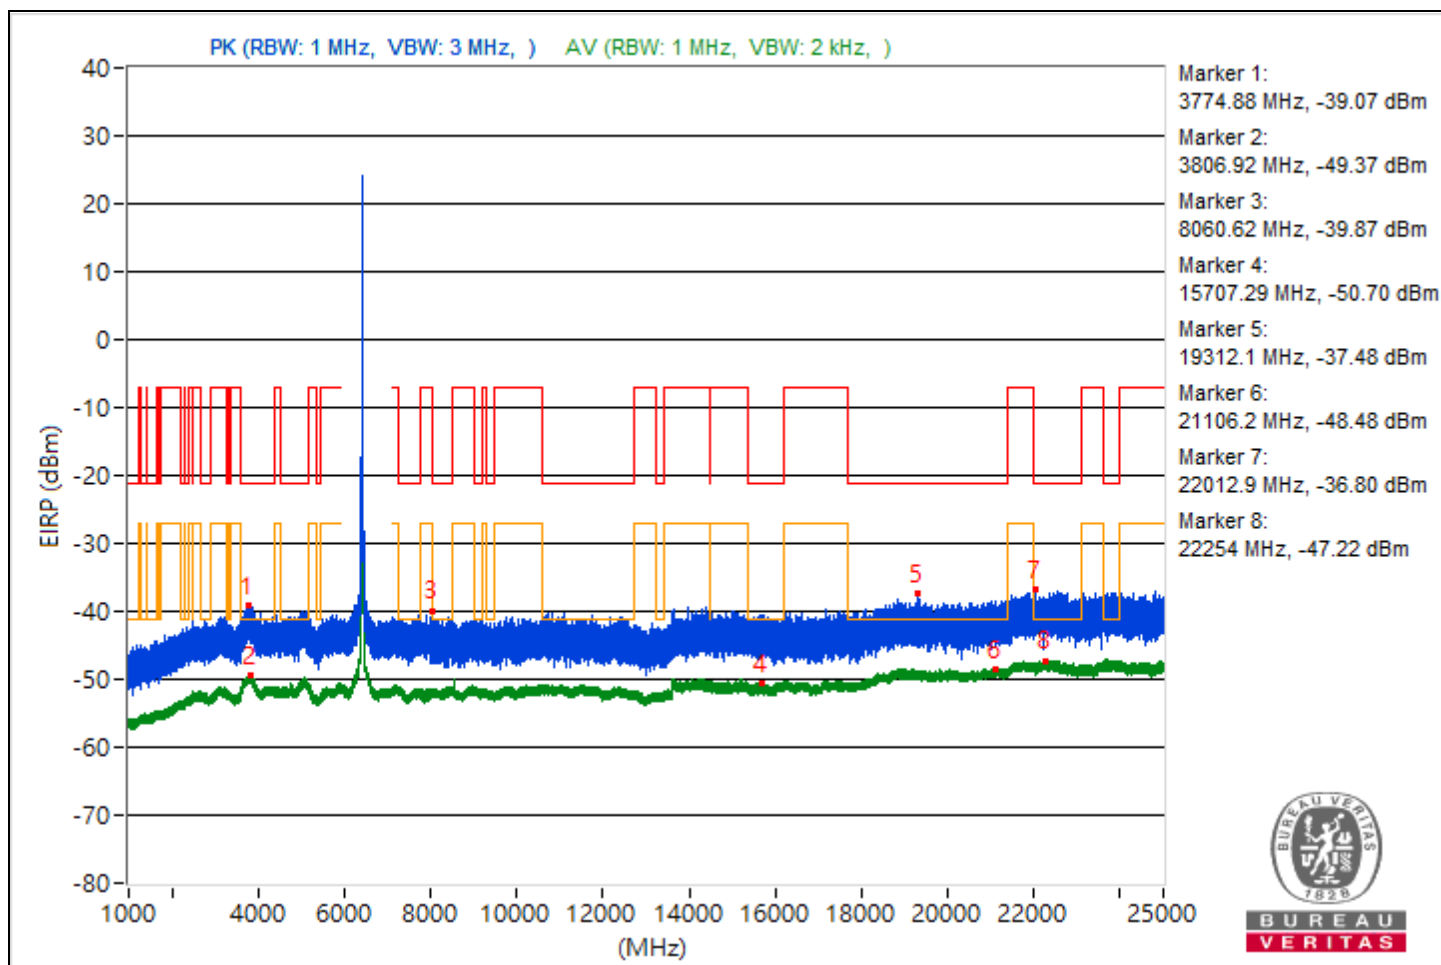


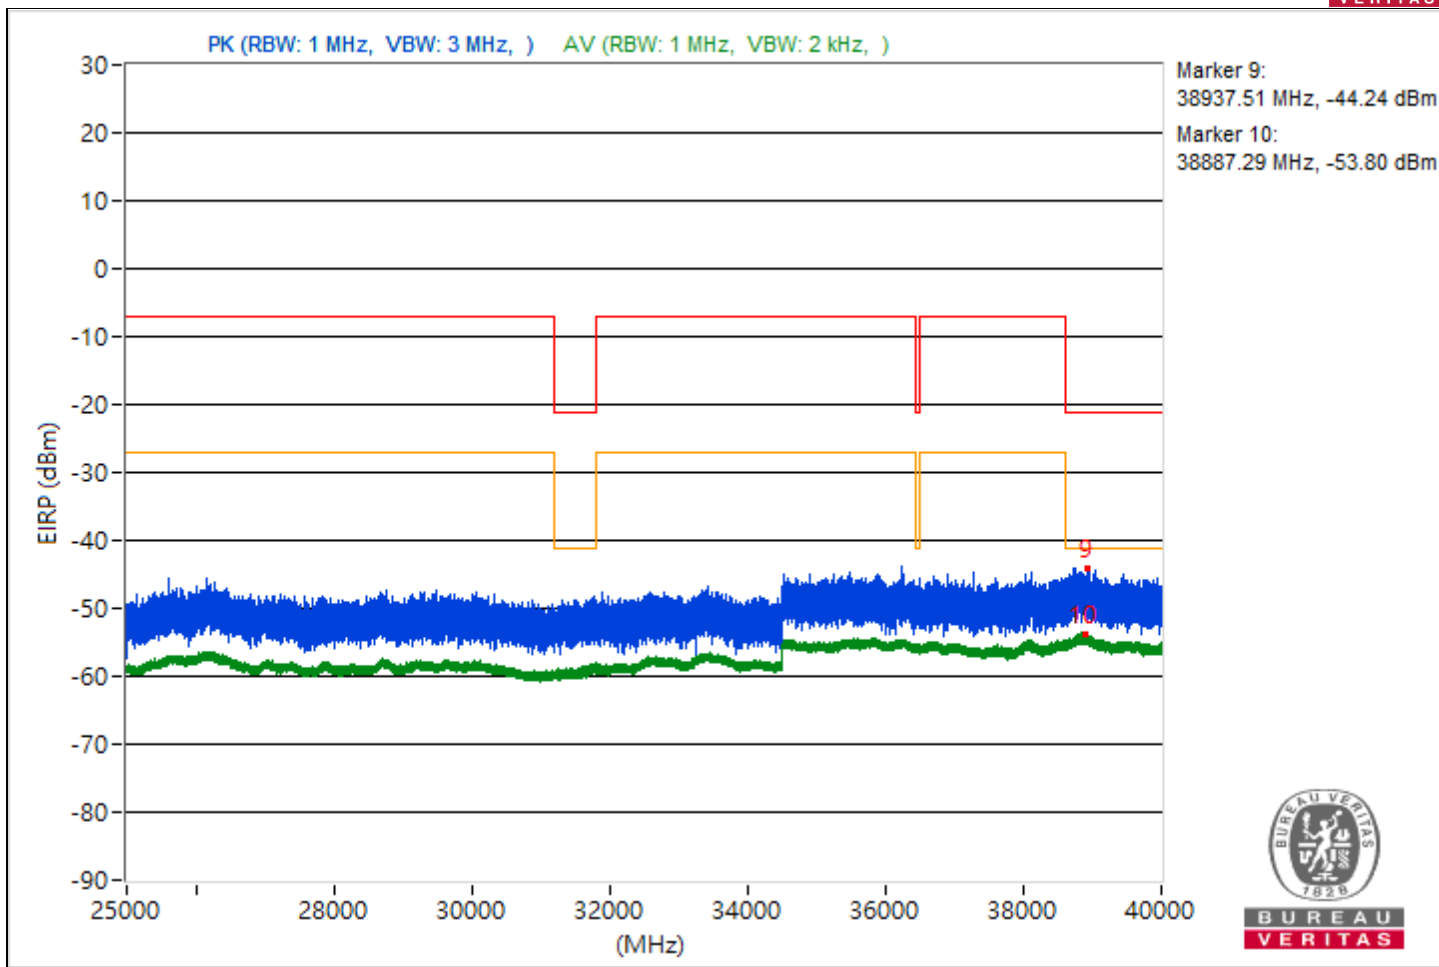


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.64	55.98 PK	74	-18.02	-45.74	-49.46	4.92	-39.28
2	3819.21	45.99 AV	54	-8.01	-56.69	-57.79	4.92	-49.27
3	11103.64	54.72 PK	74	-19.28	-46.65	-51.66	4.92	-40.54
4	14482.76	44.99 AV	54	-9.01	-58.6	-57.84	4.92	-50.27
5	18835.3	57.07 PK	74	-16.93	-44.21	-49.6	4.92	-38.19
6	21151.1	46.79 AV	54	-7.21	-56.91	-55.94	4.92	-48.47
7	23656.6	58.92 PK	74	-15.08	-42.21	-48.33	4.92	-36.34
8	22177.7	48.05 AV	54	-5.95	-54.61	-55.75	4.92	-47.21
9	38833.96	50.61 PK	74	-23.39	-50.56	-56.49	4.92	-44.65
10	38872.44	41.34 AV	54	-12.66	-61.28	-62.5	4.92	-53.92

Note: Margin value = Emission Level - Limit value

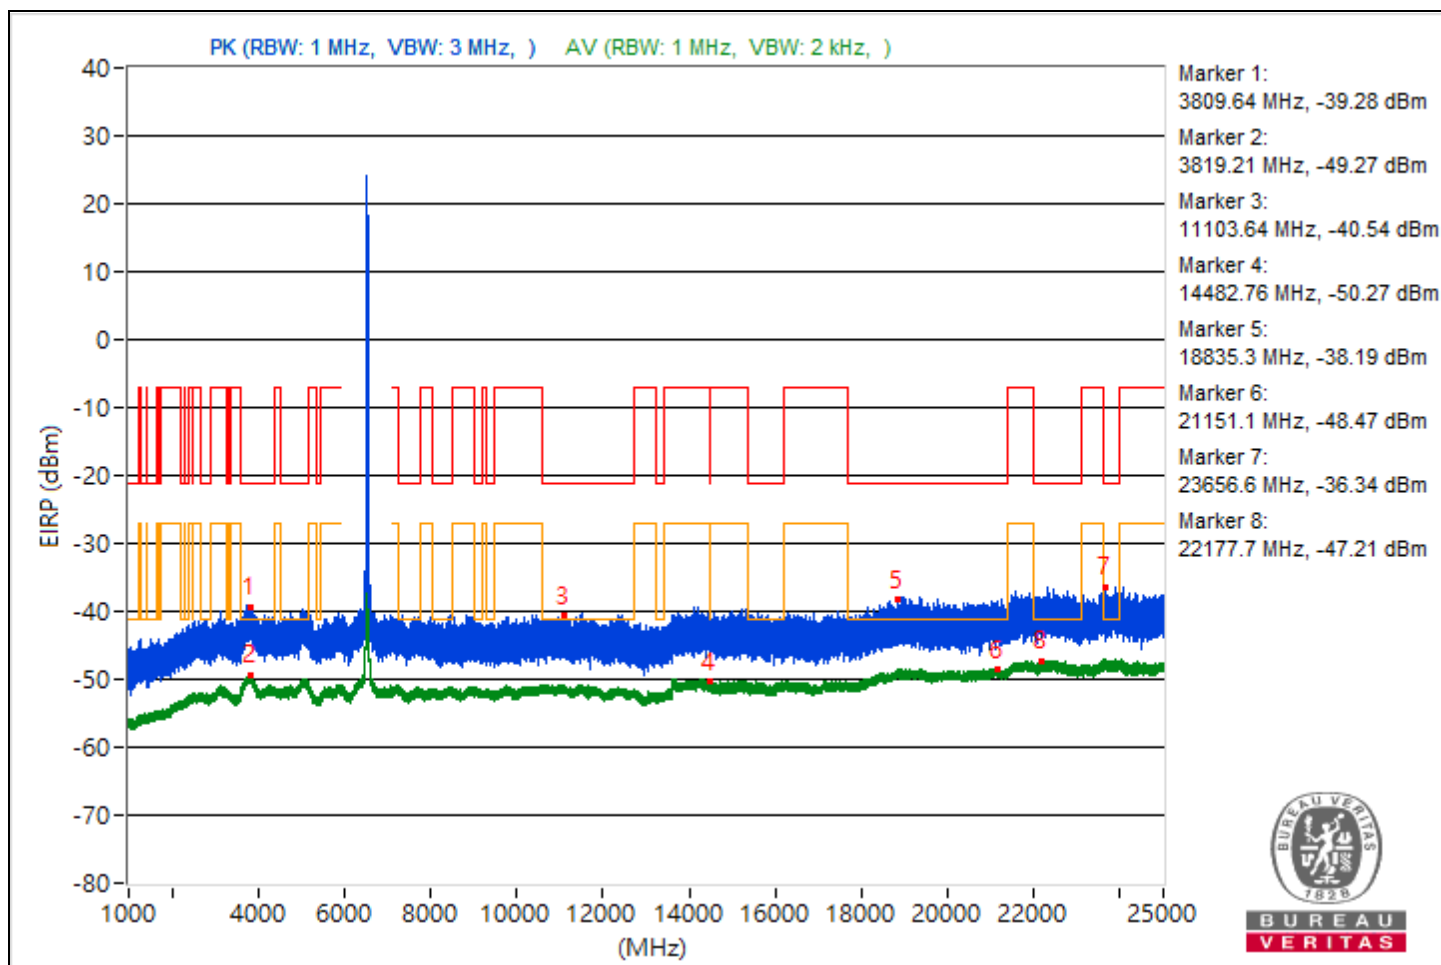


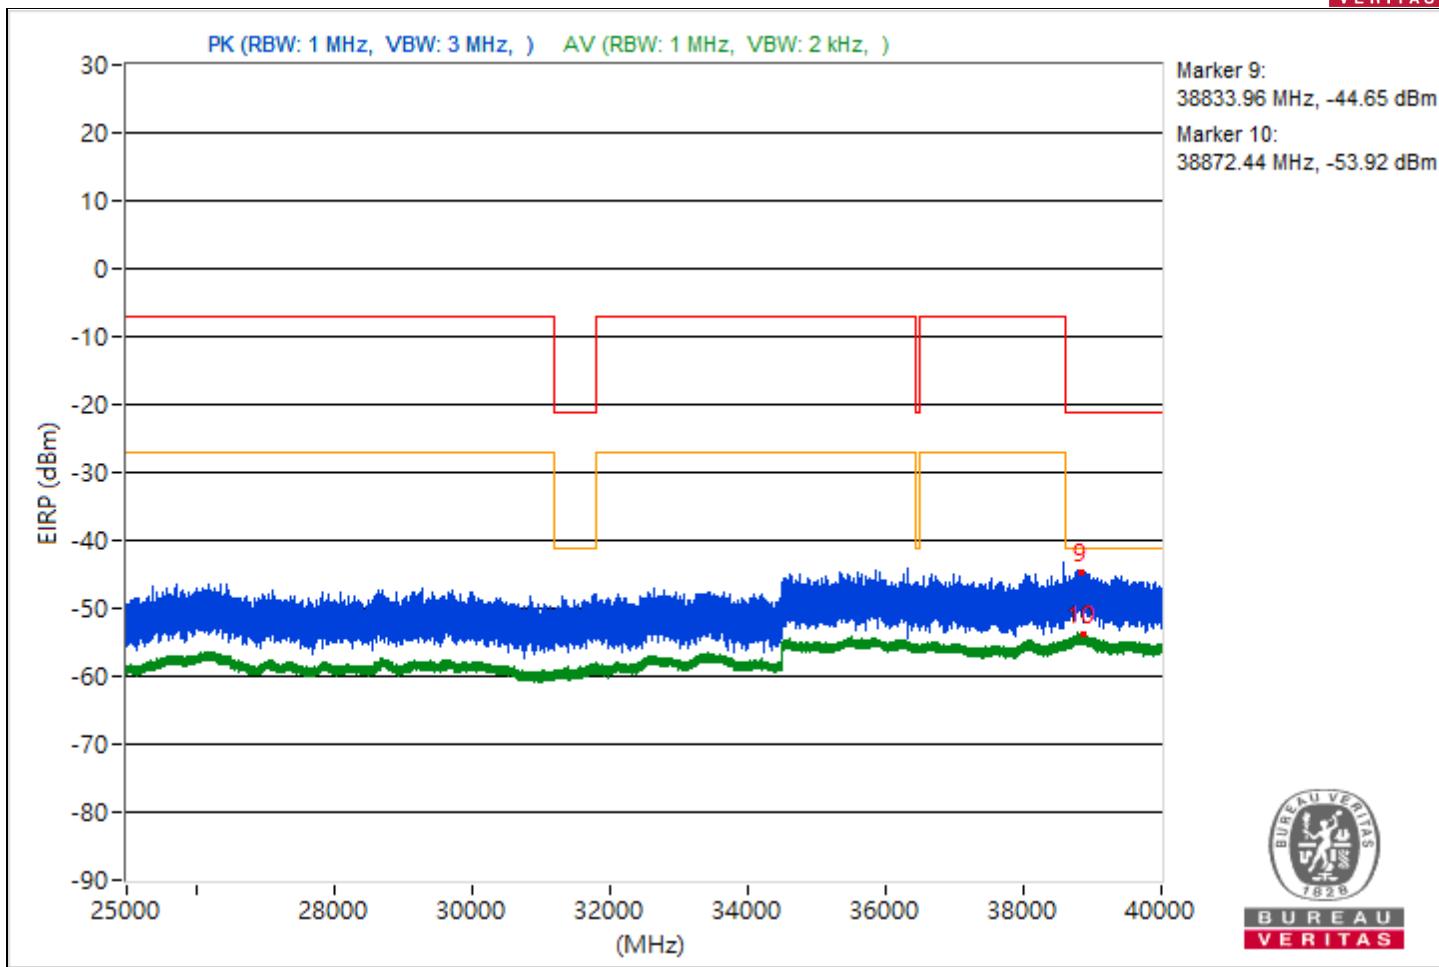


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.63	56.11 PK	74	-17.89	-45.07	-50.96	4.92	-39.15
2	3808.48	45.7 AV	54	-8.3	-57.01	-58.04	4.92	-49.56
3	11066.22	54.98 PK	74	-19.02	-46.51	-51.02	4.92	-40.28
4	14477.16	44.65 AV	54	-9.35	-59.16	-57.99	4.92	-50.61
5	20493.9	57.46 PK	74	-16.54	-49.52	-43.74	4.92	-37.8
6	21137.5	46.72 AV	54	-7.28	-57.07	-55.94	4.92	-48.54
7	22524.1	58.4 PK	74	-15.6	-48.17	-42.91	4.92	-36.86
8	23659.6	47.77 AV	54	-6.23	-54.68	-56.32	4.92	-47.49
9	39593.51	50.23 PK	74	-23.77	-50.84	-57.29	4.92	-45.03
10	38850.93	41.53 AV	54	-12.47	-62.49	-60.96	4.92	-53.73

Note: Margin value = Emission Level - Limit value

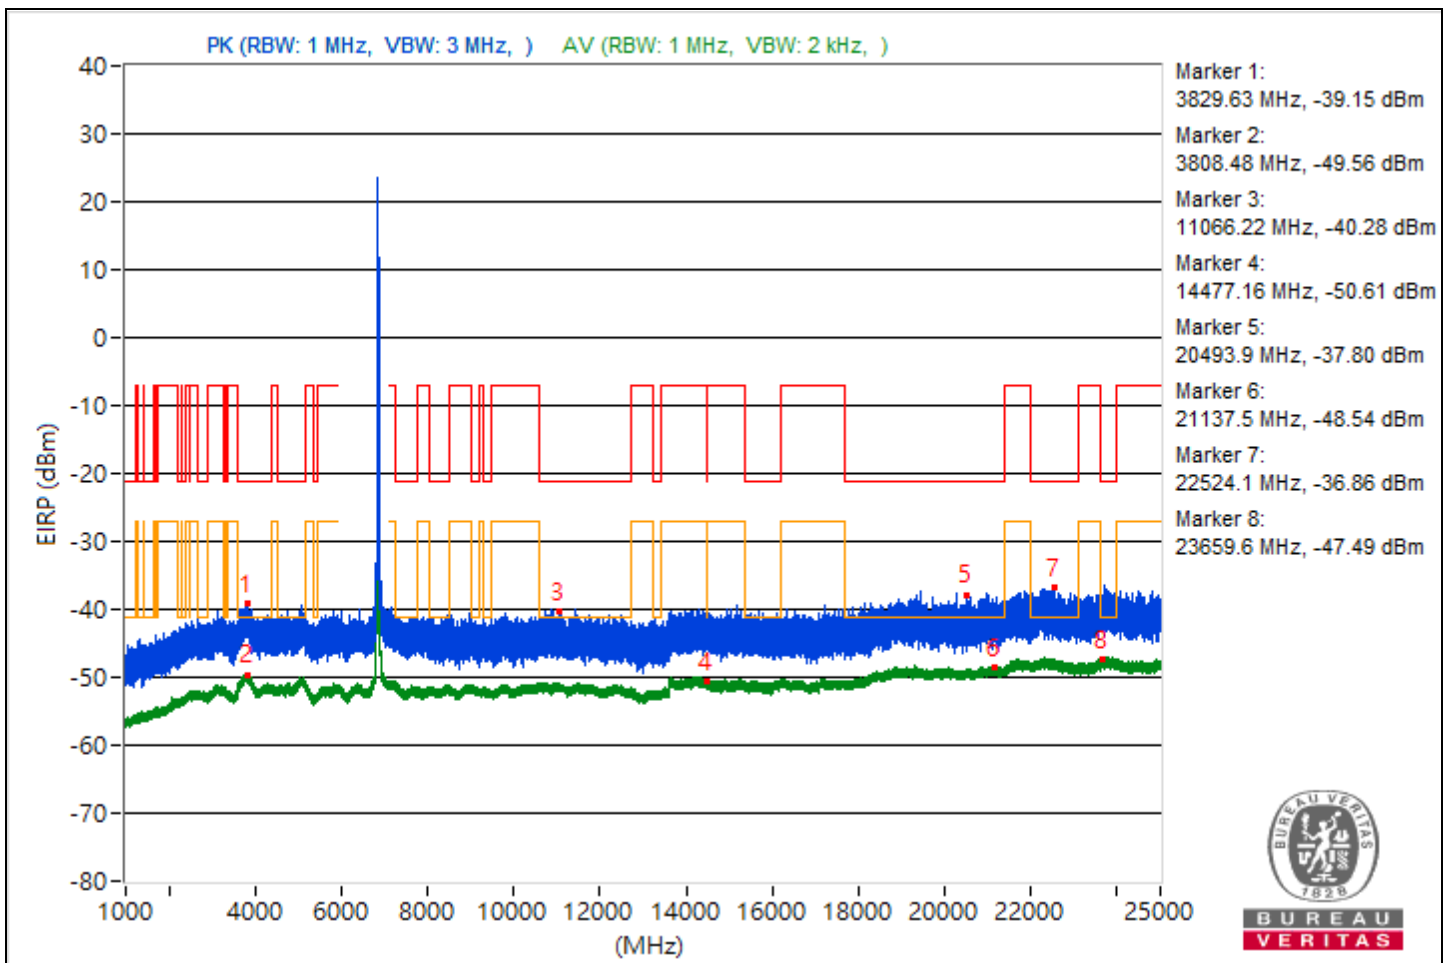

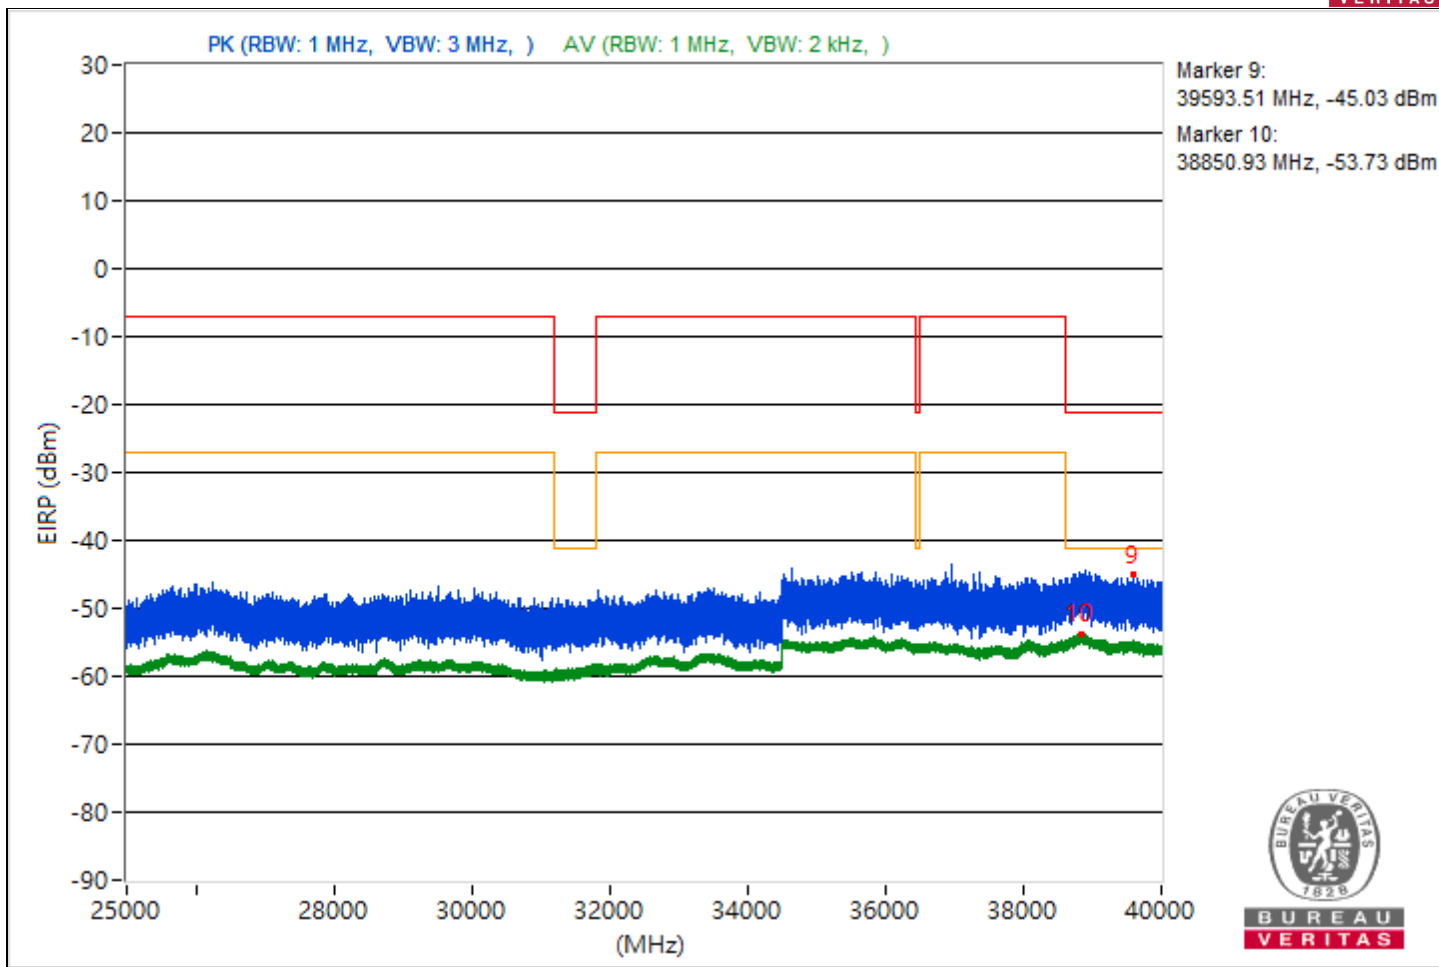





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.83	48.29 PK	74	-25.71	-53.4	-57.2	4.92	-46.97
2	5457.83	38.08 AV	54	-15.92	-64.98	-65.24	4.92	-57.18
3	11959.47	45.42 PK	74	-28.58	-56.12	-60.47	4.92	-49.84
4	11961.6	35.64 AV	54	-18.36	-68.54	-66.74	4.92	-59.62
5	21147.8	47.23 PK	74	-26.77	-59.14	-54.14	4.92	-48.03
6	21154.8	37.3 AV	54	-16.7	-66.15	-65.66	4.92	-57.96
7	23868.8	48.28 PK	74	-25.72	-53.14	-57.95	4.92	-46.98
8	22234.5	38.33 AV	54	-15.67	-64.31	-65.49	4.92	-56.93
9	38804.09	42.07 PK	74	-31.93	-59.43	-63.91	4.92	-53.19
10	38848.27	31.77 AV	54	-22.23	-71.9	-71	4.92	-63.49

Note: Margin value = Emission Level - Limit value

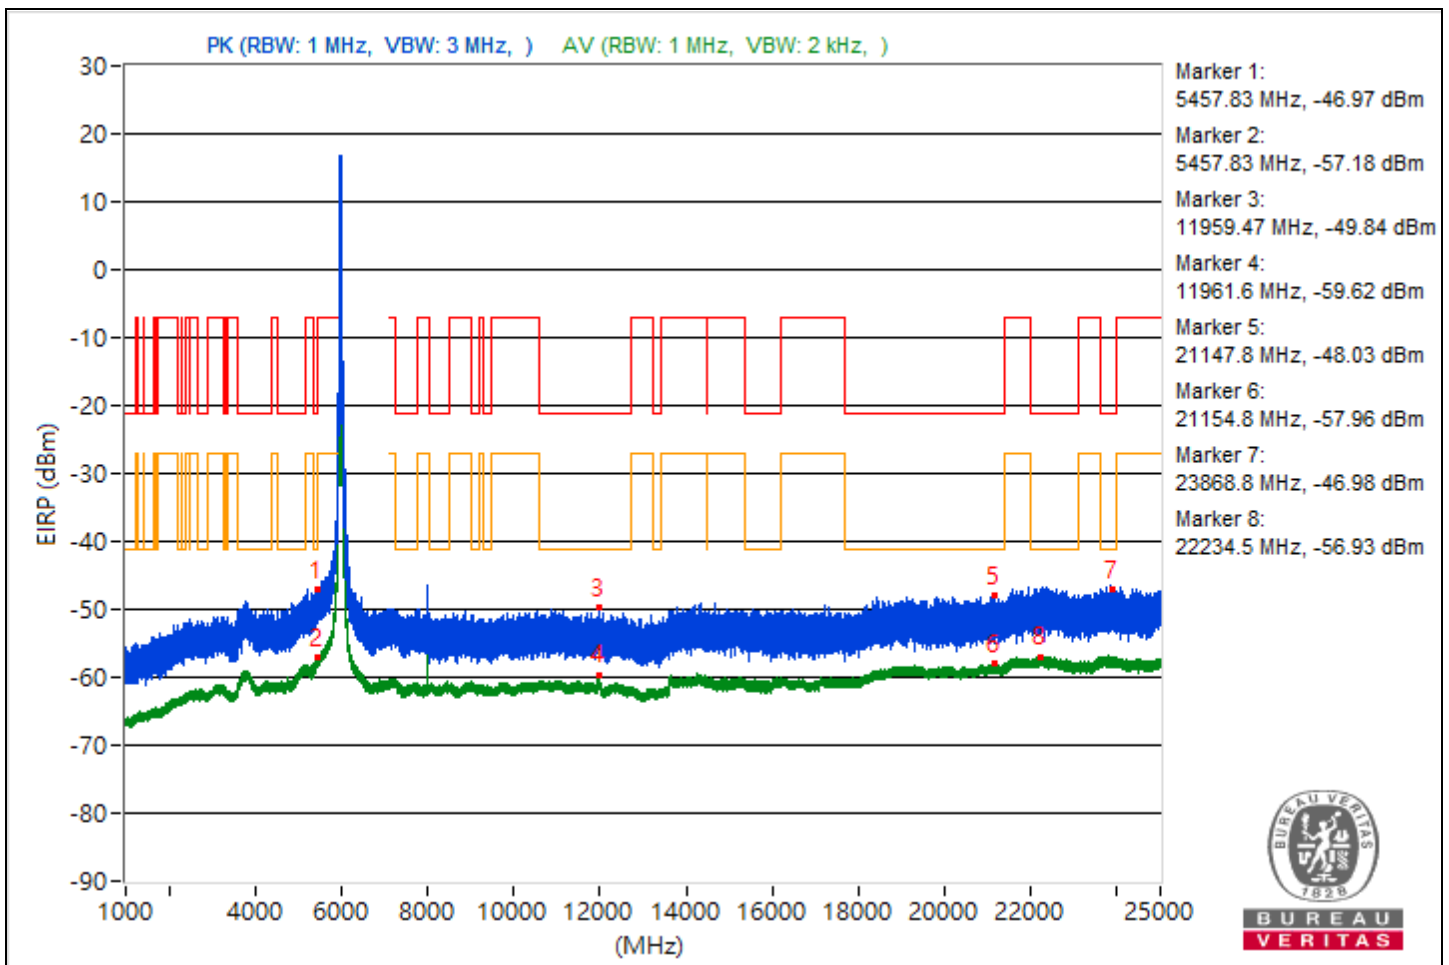


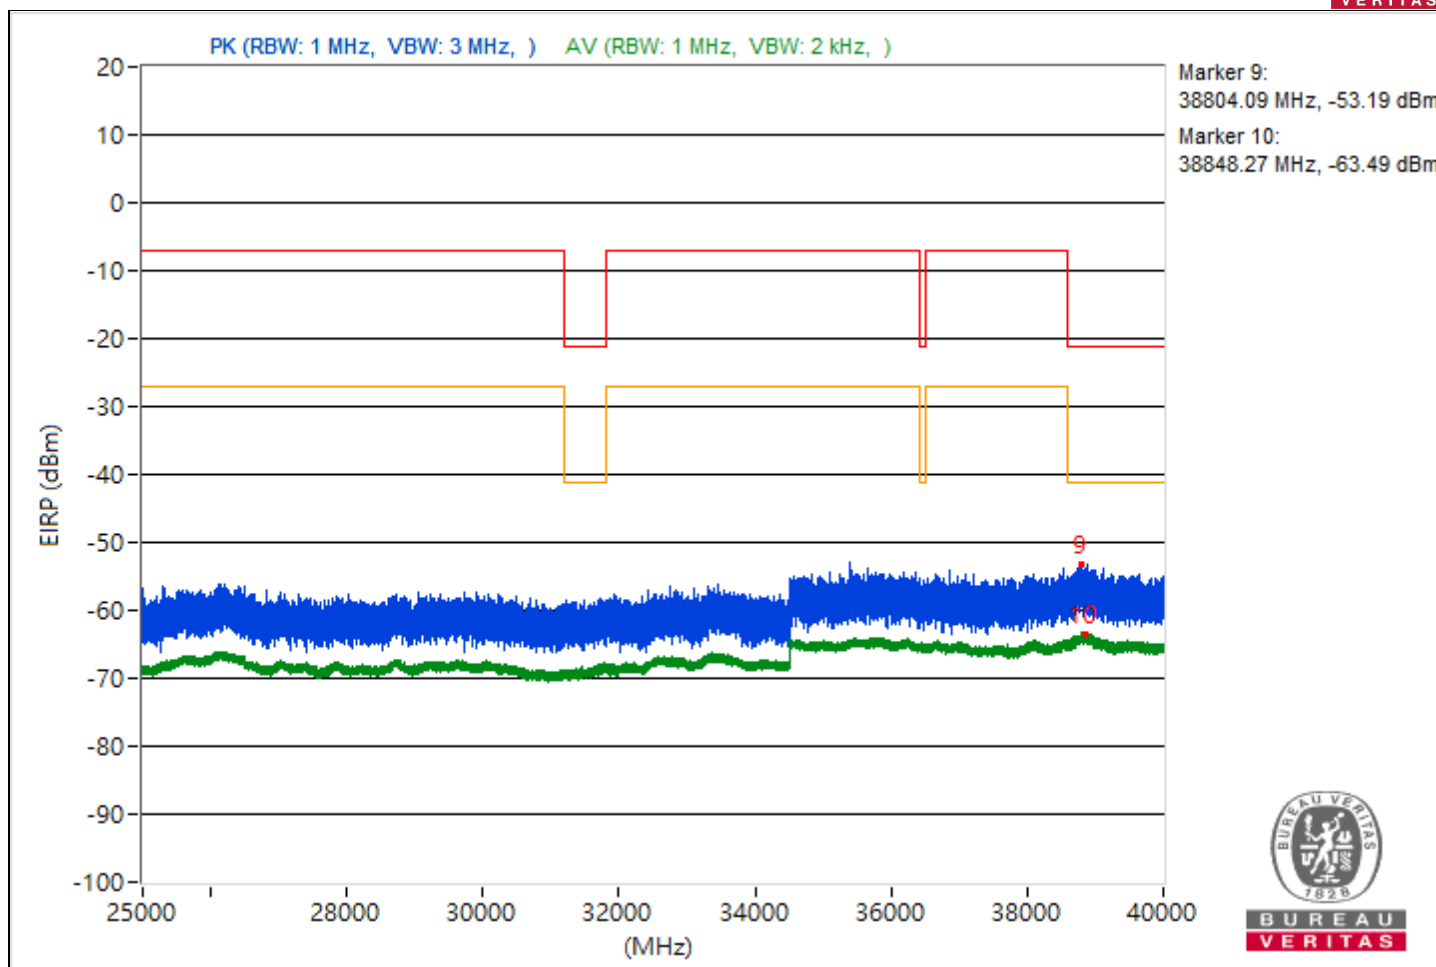


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3809.26	47.22 PK	74	-26.78	-53.97	-59.77	4.92	-48.04
2	5457.6	36.48 AV	54	-17.52	-66.05	-67.48	4.92	-58.78
3	11567.29	45.37 PK	74	-28.63	-60.04	-56.37	4.92	-49.89
4	7259.94	35.34 AV	54	-18.66	-68.12	-67.6	4.92	-59.92
5	21158.6	47.72 PK	74	-26.28	-56.42	-54.69	4.92	-47.54
6	21103	37.14 AV	54	-16.86	-65.73	-66.4	4.92	-58.12
7	22230.2	49.51 PK	74	-24.49	-54.57	-52.93	4.92	-45.75
8	22346.2	38.24 AV	54	-15.76	-65.45	-64.5	4.92	-57.02
9	38788.53	41.41 PK	74	-32.59	-65.72	-59.75	4.92	-53.85
10	38835.47	31.72 AV	54	-22.28	-71.85	-71.13	4.92	-63.54

Note: Margin value = Emission Level - Limit value

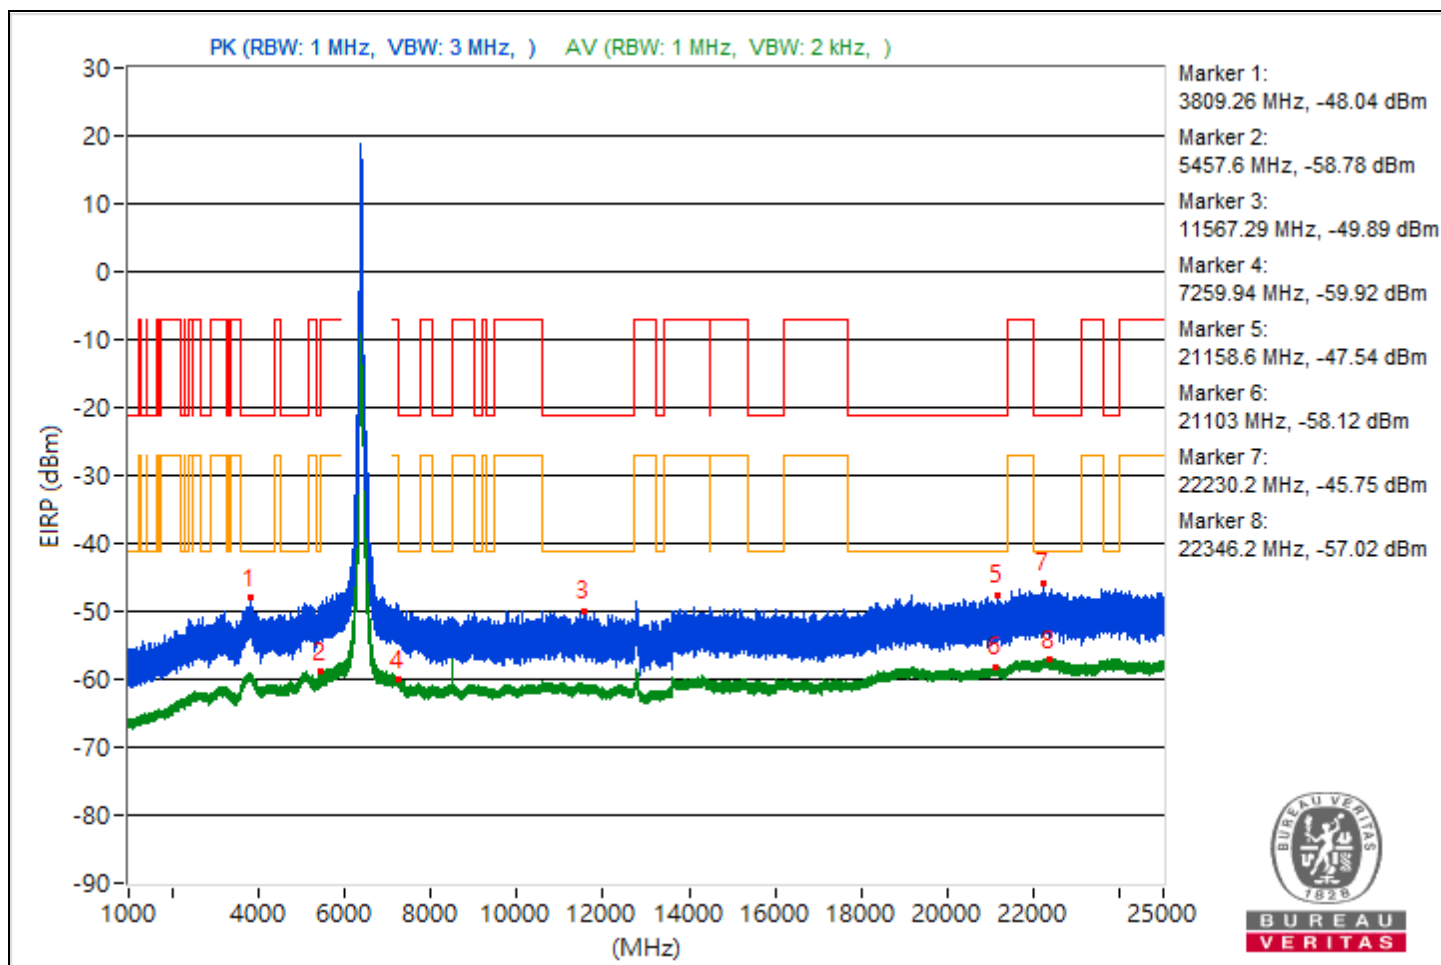


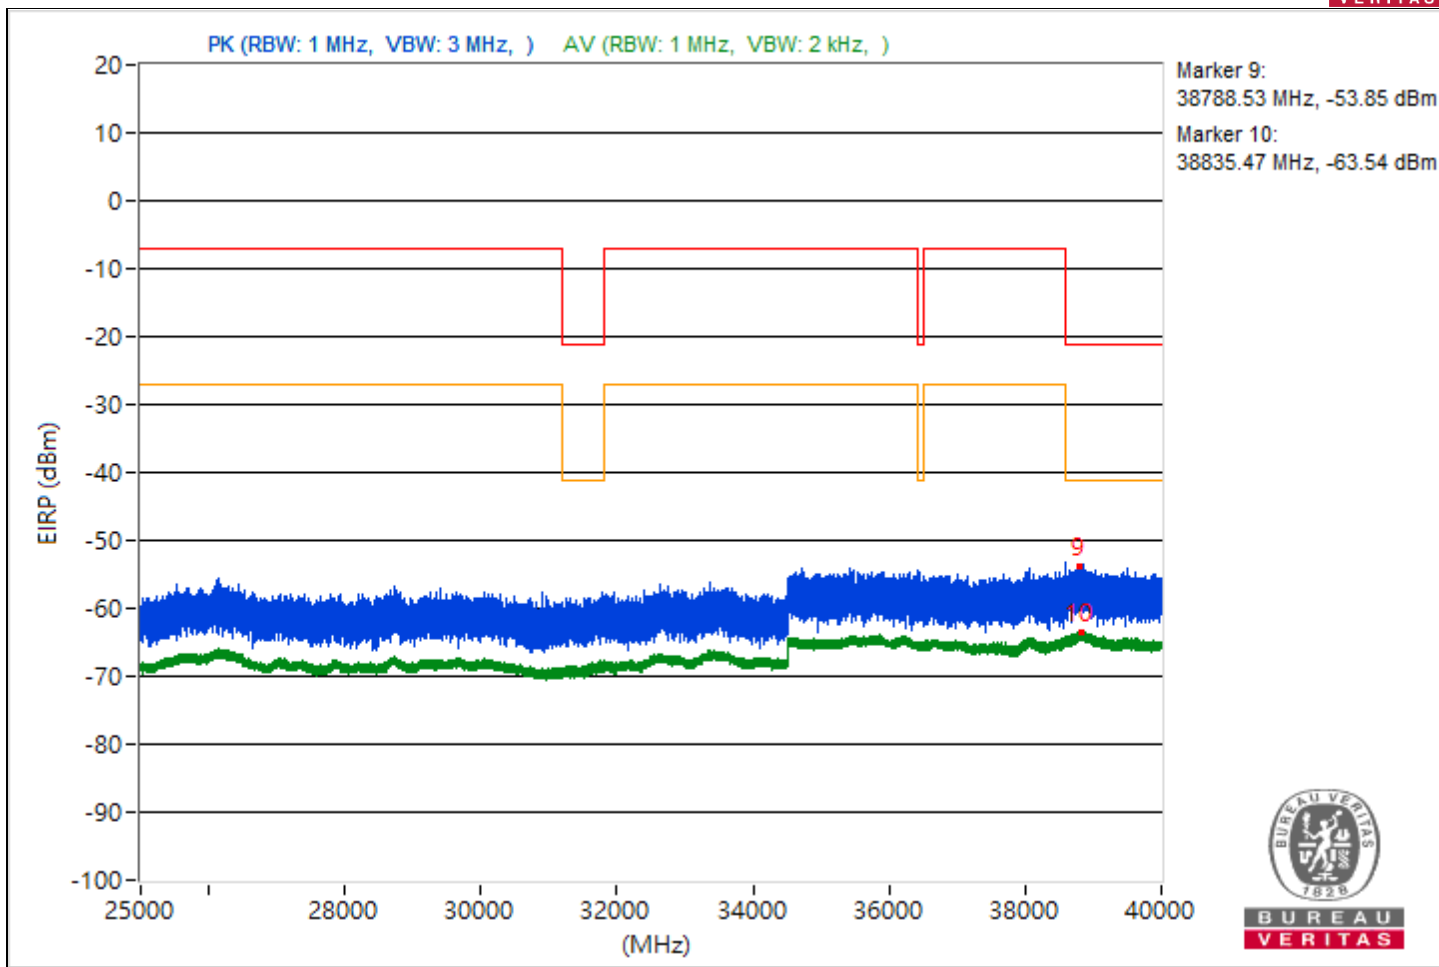


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3817.42	46.74 PK	74	-27.26	-60.32	-54.44	4.92	-48.52
2	3829.4	36.25 AV	54	-17.75	-66.49	-67.46	4.92	-59.01
3	13263.11	46.2 PK	74	-27.8	-59.2	-55.53	4.92	-49.06
4	13251.82	37.15 AV	54	-16.85	-66.63	-65.52	4.92	-58.11
5	19355.1	47.26 PK	74	-26.74	-61.51	-53.57	4.92	-48
6	20877.4	36.83 AV	54	-17.17	-65.67	-67.17	4.92	-58.43
7	22762.8	48.39 PK	74	-25.61	-52.64	-59.3	4.92	-46.87
8	23824.8	38.2 AV	54	-15.8	-64.48	-65.56	4.92	-57.06
9	38753.69	41.84 PK	74	-32.16	-59.79	-63.8	4.92	-53.42
10	38855.64	31.78 AV	54	-22.22	-70.92	-71.97	4.92	-63.48

Note: Margin value = Emission Level - Limit value

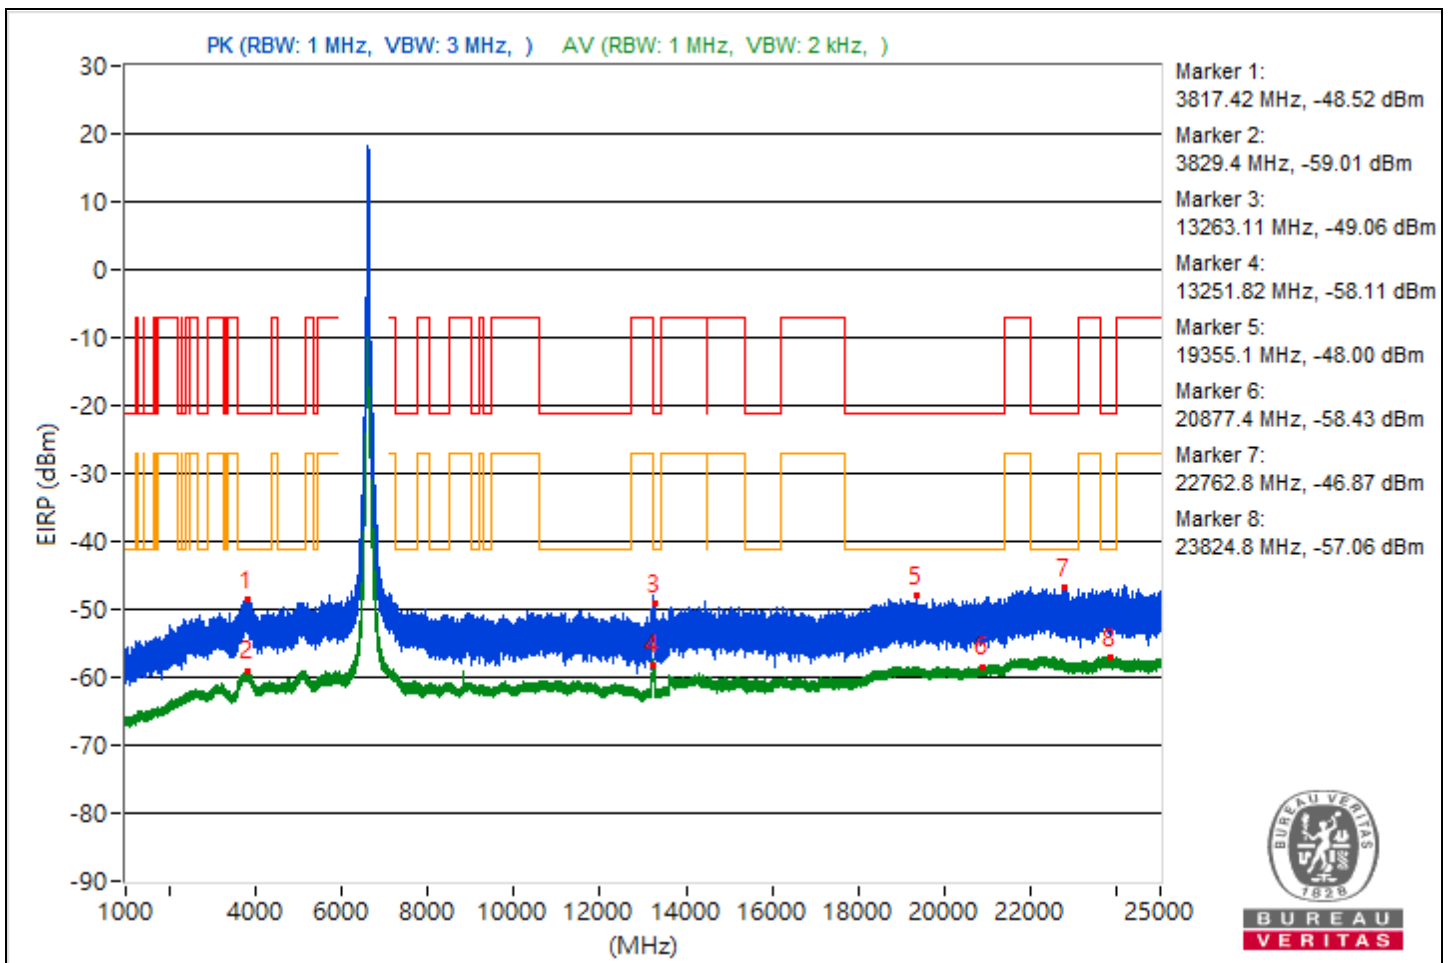


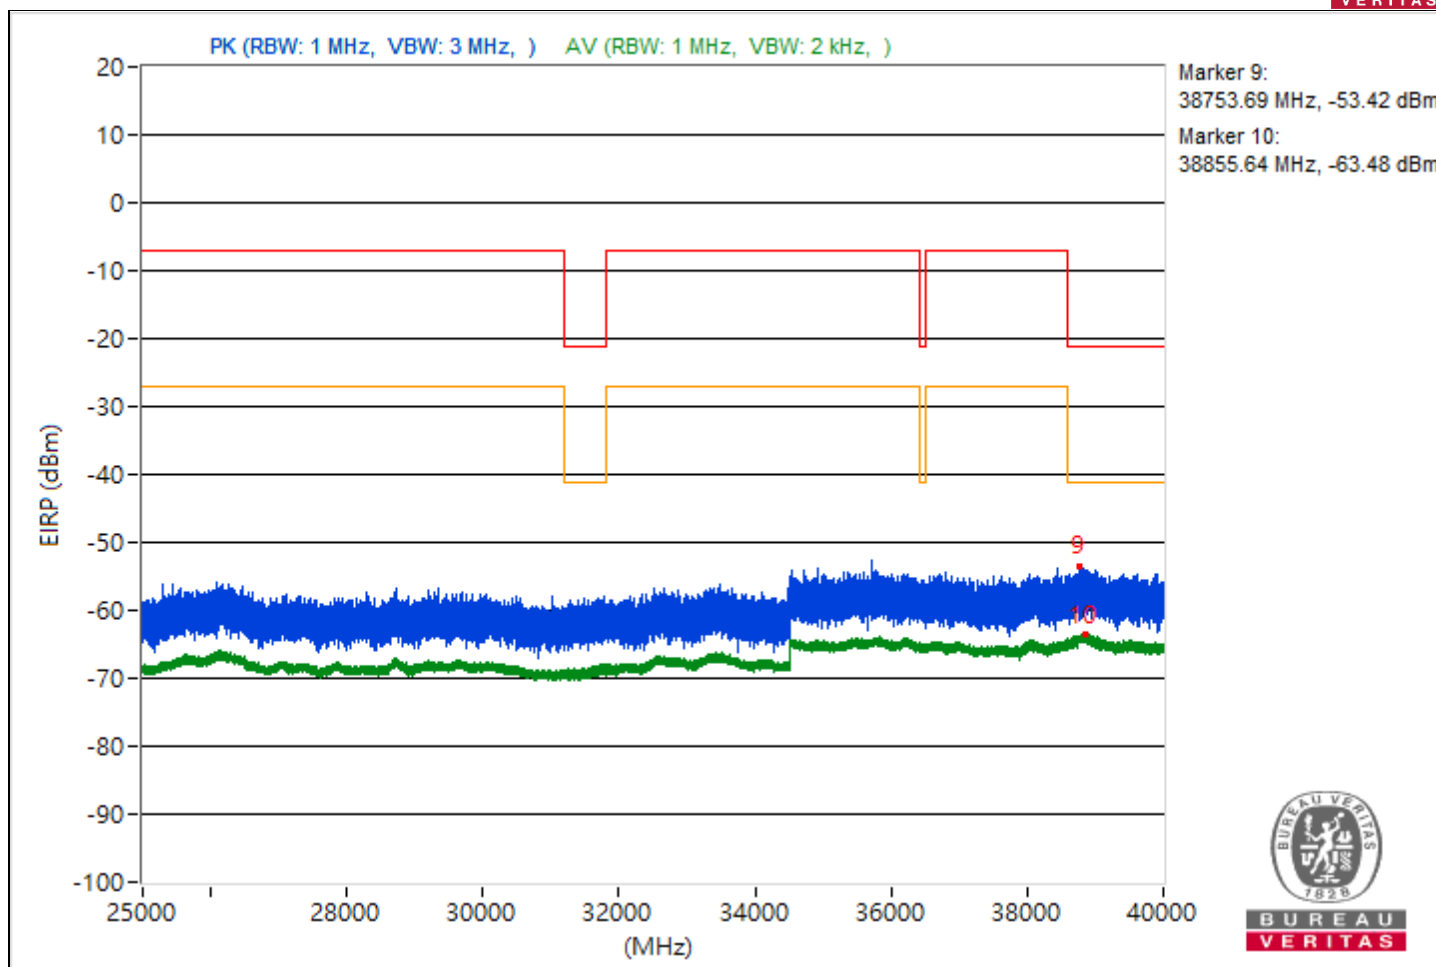


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5116.47	46.87 PK	74	-27.13	-54.28	-60.28	4.92	-48.39
2	3812.21	36.2 AV	54	-17.8	-66.6	-67.42	4.92	-59.06
3	7267.57	47.28 PK	74	-26.72	-57.55	-54.73	4.92	-47.98
4	7253.88	36.84 AV	54	-17.16	-66.15	-66.56	4.92	-58.42
5	19858.5	46.94 PK	74	-27.06	-59.05	-54.56	4.92	-48.32
6	21145.5	36.9 AV	54	-17.1	-66.82	-65.81	4.92	-58.36
7	22268.6	48.24 PK	74	-25.76	-52.84	-59.26	4.92	-47.02
8	23814.8	38.3 AV	54	-15.7	-64.5	-65.31	4.92	-56.96
9	38788.36	41.29 PK	74	-32.71	-65.25	-60.04	4.92	-53.97
10	38852.18	31.64 AV	54	-22.36	-70.98	-72.21	4.92	-63.62

Note: Margin value = Emission Level - Limit value

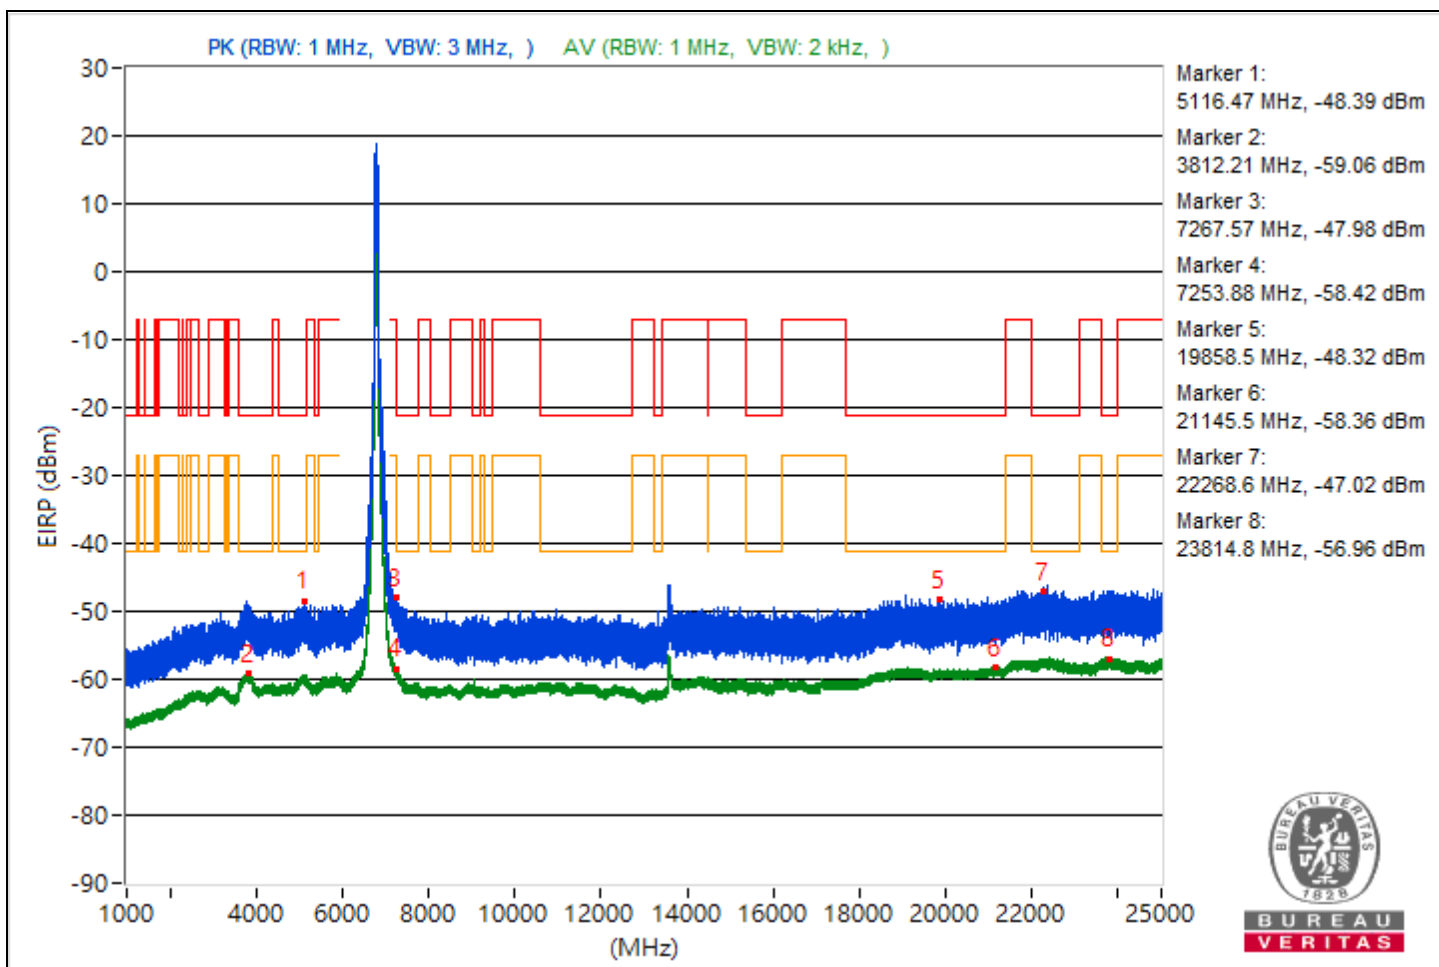

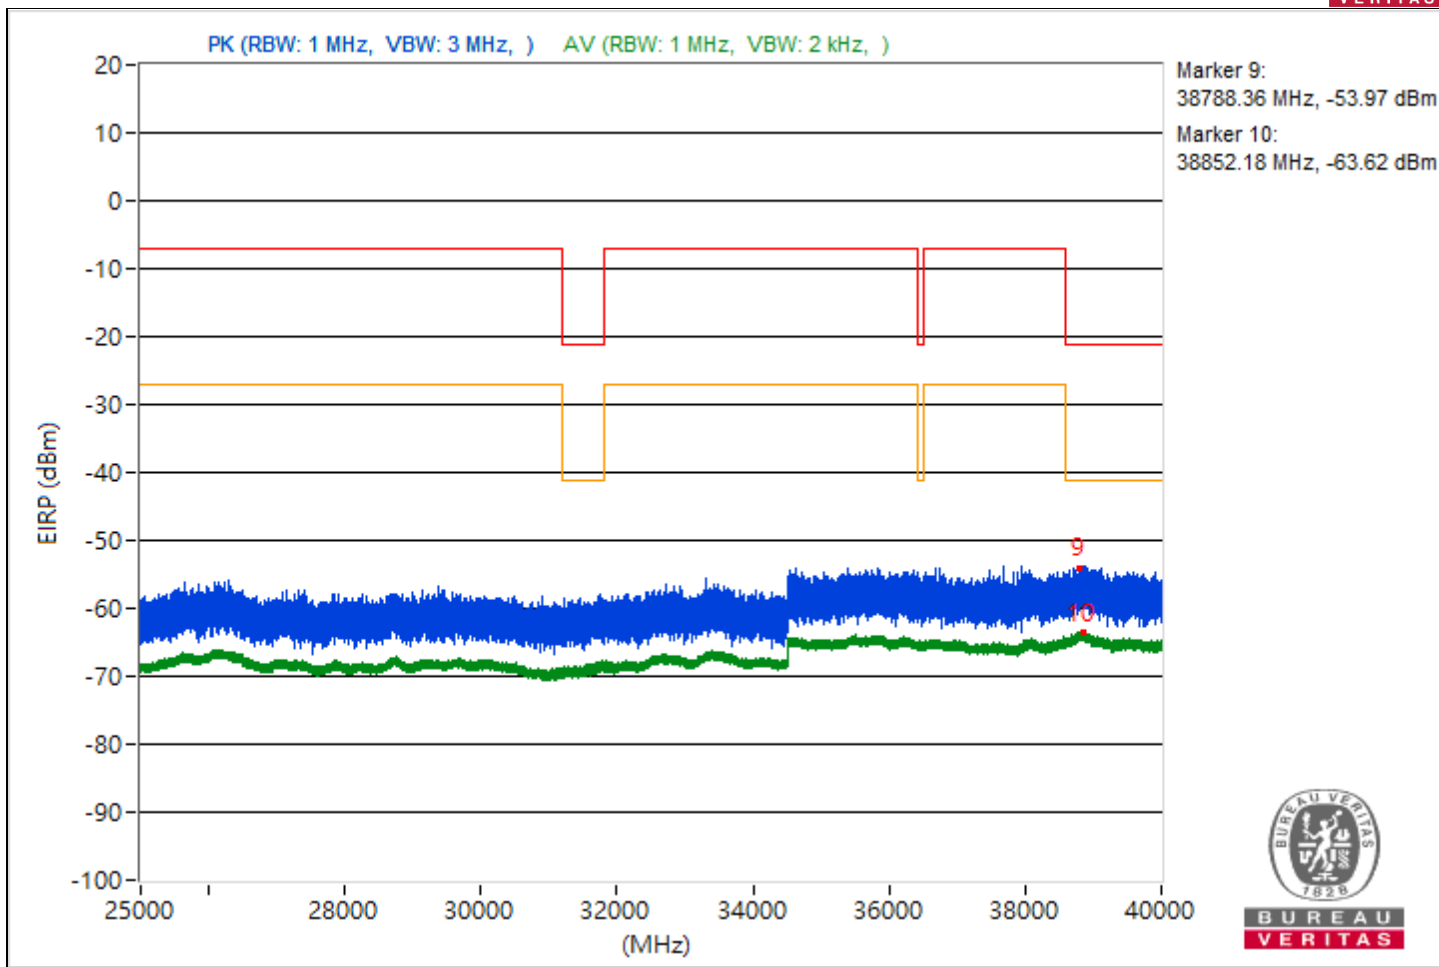





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5867.41	64.85 PK	88.26	-23.41	-36.54	-41.47	4.92	-30.41
2	#5874.18	55.21 AV	68.26	-13.05	-47.76	-48.2	4.92	-40.05
3	8033.24	48.17 PK	74	-25.83	-52.52	-61.53	4.92	-47.09
4	8033.24	46.51 AV	54	-7.49	-53.82	-68.4	4.92	-48.75
5	21005.2	47.39 PK	74	-26.61	-53.65	-60.25	4.92	-47.87
6	21068.3	37.16 AV	54	-16.84	-66.52	-65.59	4.92	-58.1
7	23027.2	48.46 PK	74	-25.54	-57.38	-53.09	4.92	-46.8
8	23621.5	38.29 AV	54	-15.71	-64.46	-65.39	4.92	-56.97
9	38792.09	41.23 PK	74	-32.77	-65.32	-60.09	4.92	-54.03
10	38815.11	31.76 AV	54	-22.24	-70.81	-72.14	4.92	-63.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

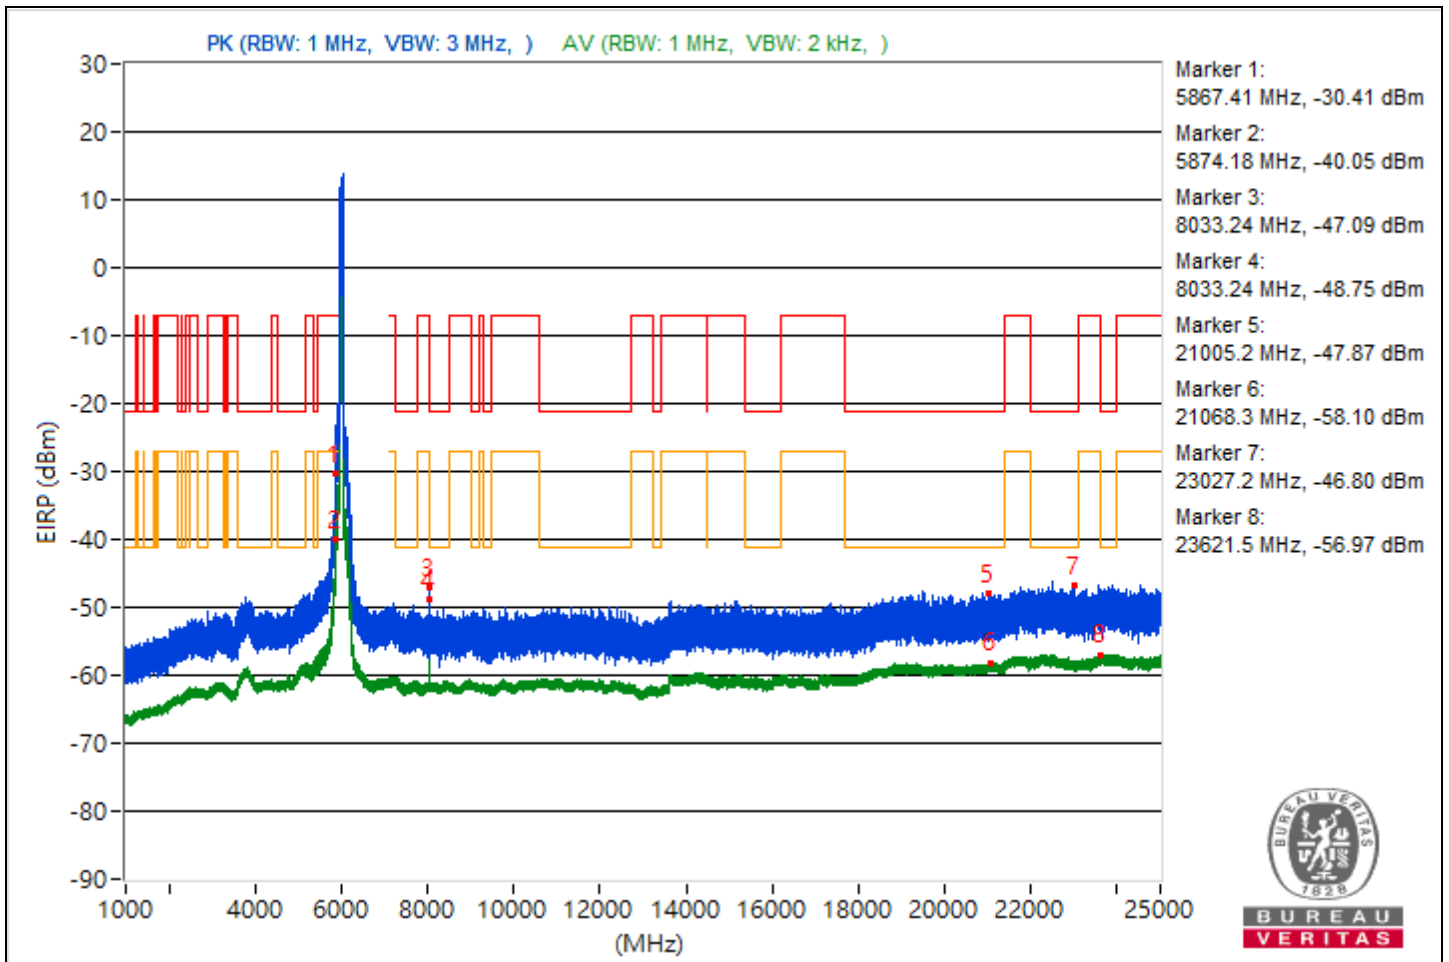


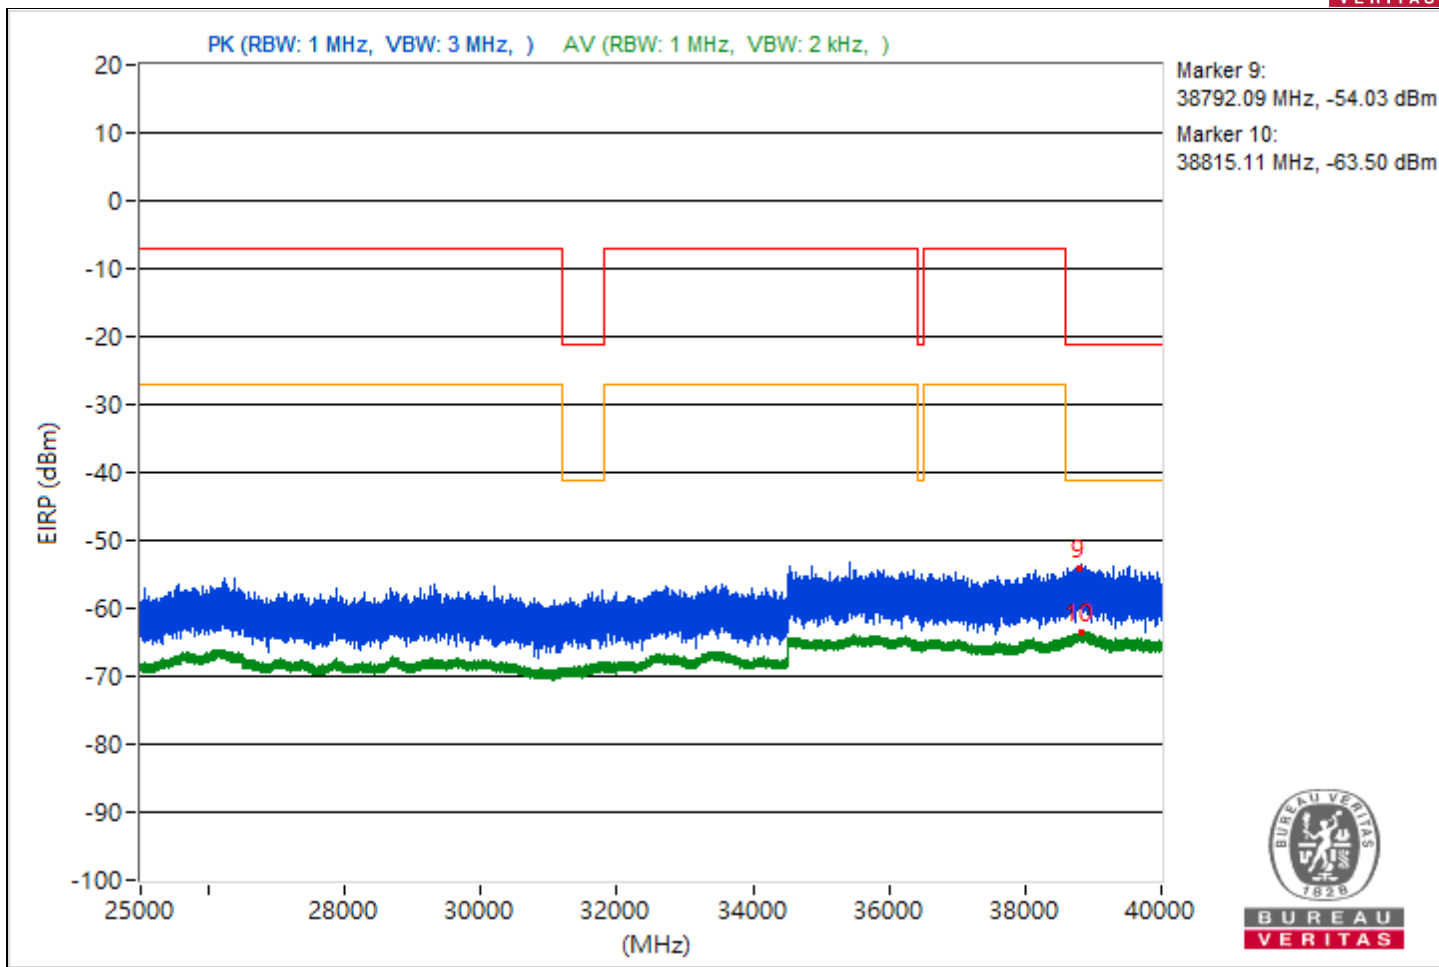


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.34	47.09 PK	74	-26.91	-58.59	-54.52	4.92	-48.17
2	5122.22	36.34 AV	54	-17.66	-66.34	-67.42	4.92	-58.92
3	8459.91	46.94 PK	74	-27.06	-53.98	-61.32	4.92	-48.32
4	8459.91	40.5 AV	54	-13.5	-60.31	-68.37	4.92	-54.76
5	20998.2	46.87 PK	74	-27.13	-58.87	-54.73	4.92	-48.39
6	21201.4	37.16 AV	54	-16.84	-65.63	-66.47	4.92	-58.1
7	22241	48.58 PK	74	-25.42	-56.65	-53.23	4.92	-46.68
8	23855.8	38.3 AV	54	-15.7	-65.63	-64.26	4.92	-56.96
9	39268	41.63 PK	74	-32.37	-63.7	-60.14	4.92	-53.63
10	38792.44	31.9 AV	54	-22.1	-70.97	-71.63	4.92	-63.36

Note: Margin value = Emission Level - Limit value

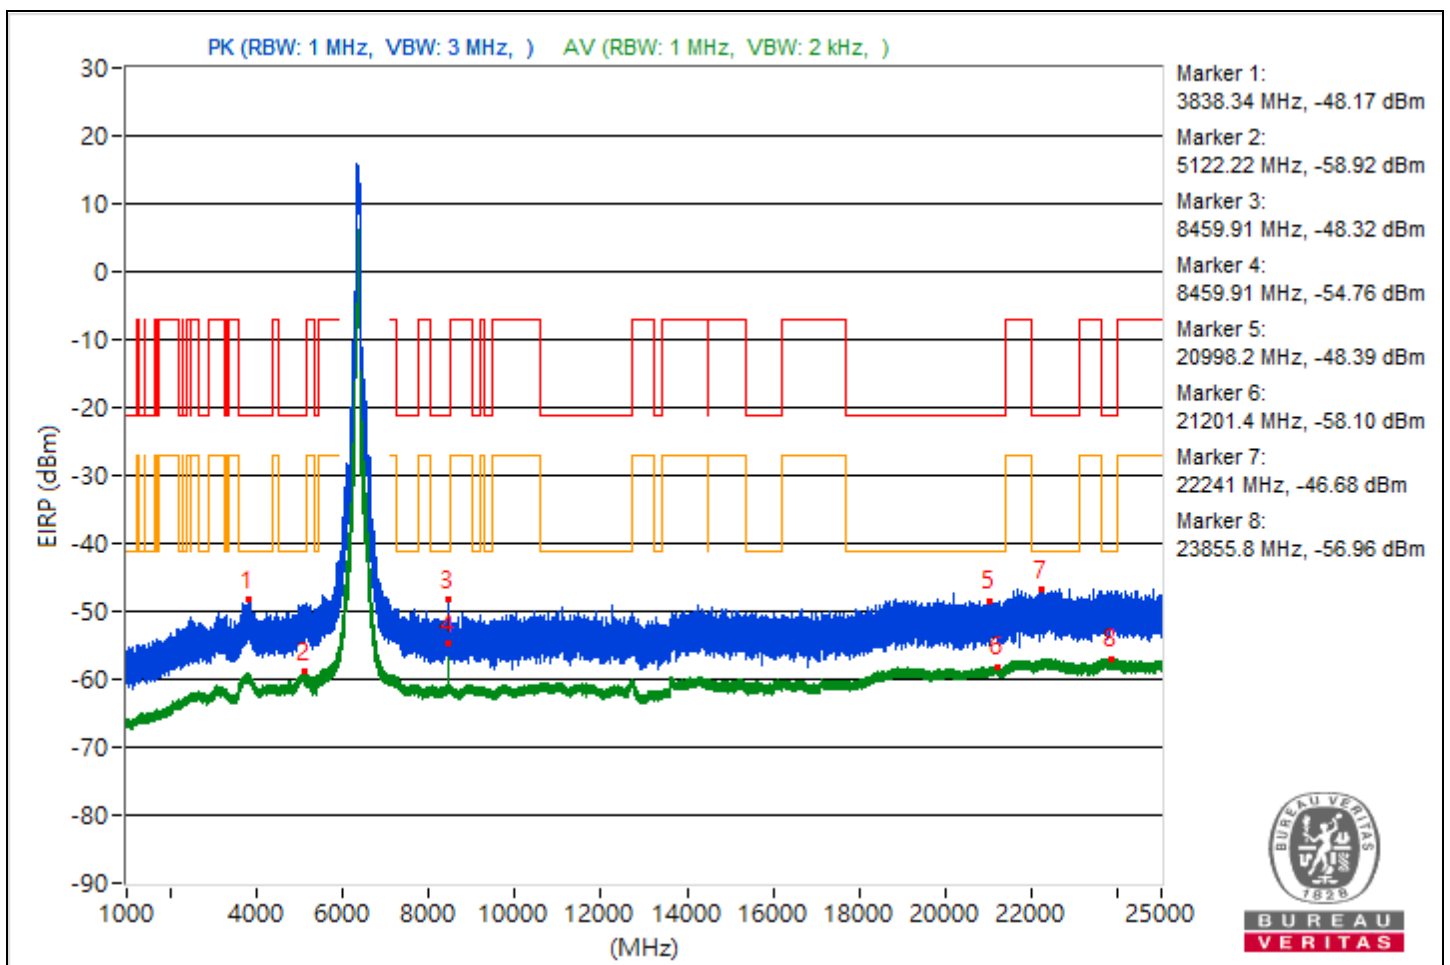


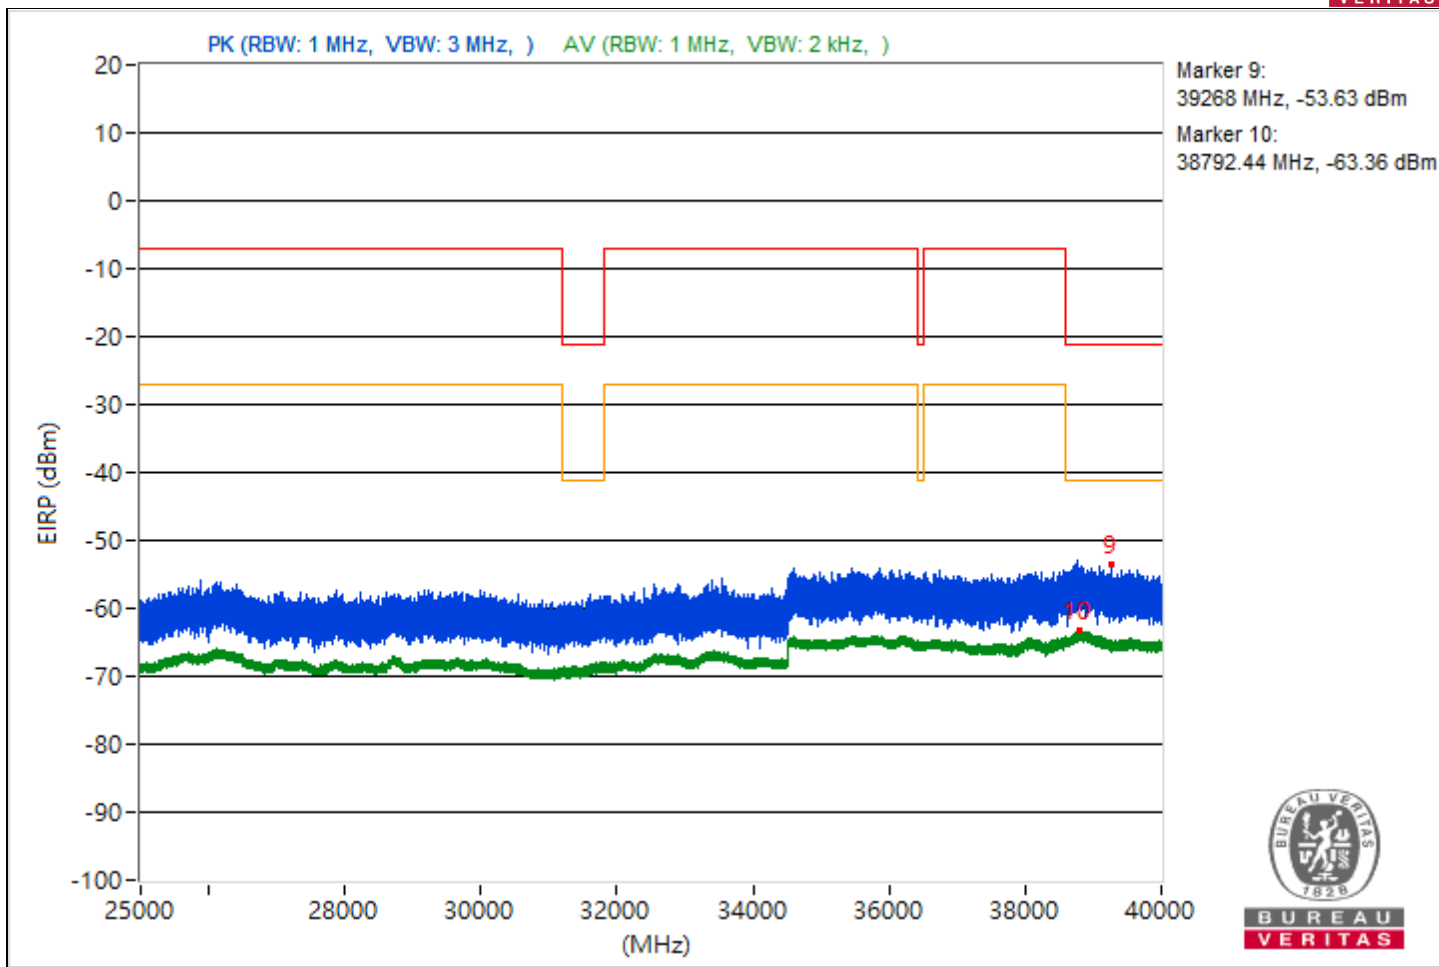


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.74	46.04 PK	74	-27.96	-55.29	-60.46	4.92	-49.22
2	5073.69	36.3 AV	54	-17.7	-66.74	-67.05	4.92	-58.96
3	7261.19	46.35 PK	74	-27.65	-59.37	-55.25	4.92	-48.91
4	7252.87	35.72 AV	54	-18.28	-68.26	-66.8	4.92	-59.54
5	20598.3	47.43 PK	74	-26.57	-53.79	-59.43	4.92	-47.83
6	21174.7	37.12 AV	54	-16.88	-66.38	-65.79	4.92	-58.14
7	22507.5	48.76 PK	74	-25.24	-57.75	-52.57	4.92	-46.5
8	23791.8	38.19 AV	54	-15.81	-64.37	-65.73	4.92	-57.07
9	38941.42	41.38 PK	74	-32.62	-64.47	-60.17	4.92	-53.88
10	38867.29	31.66 AV	54	-22.34	-72.14	-71	4.92	-63.6

Note: Margin value = Emission Level - Limit value

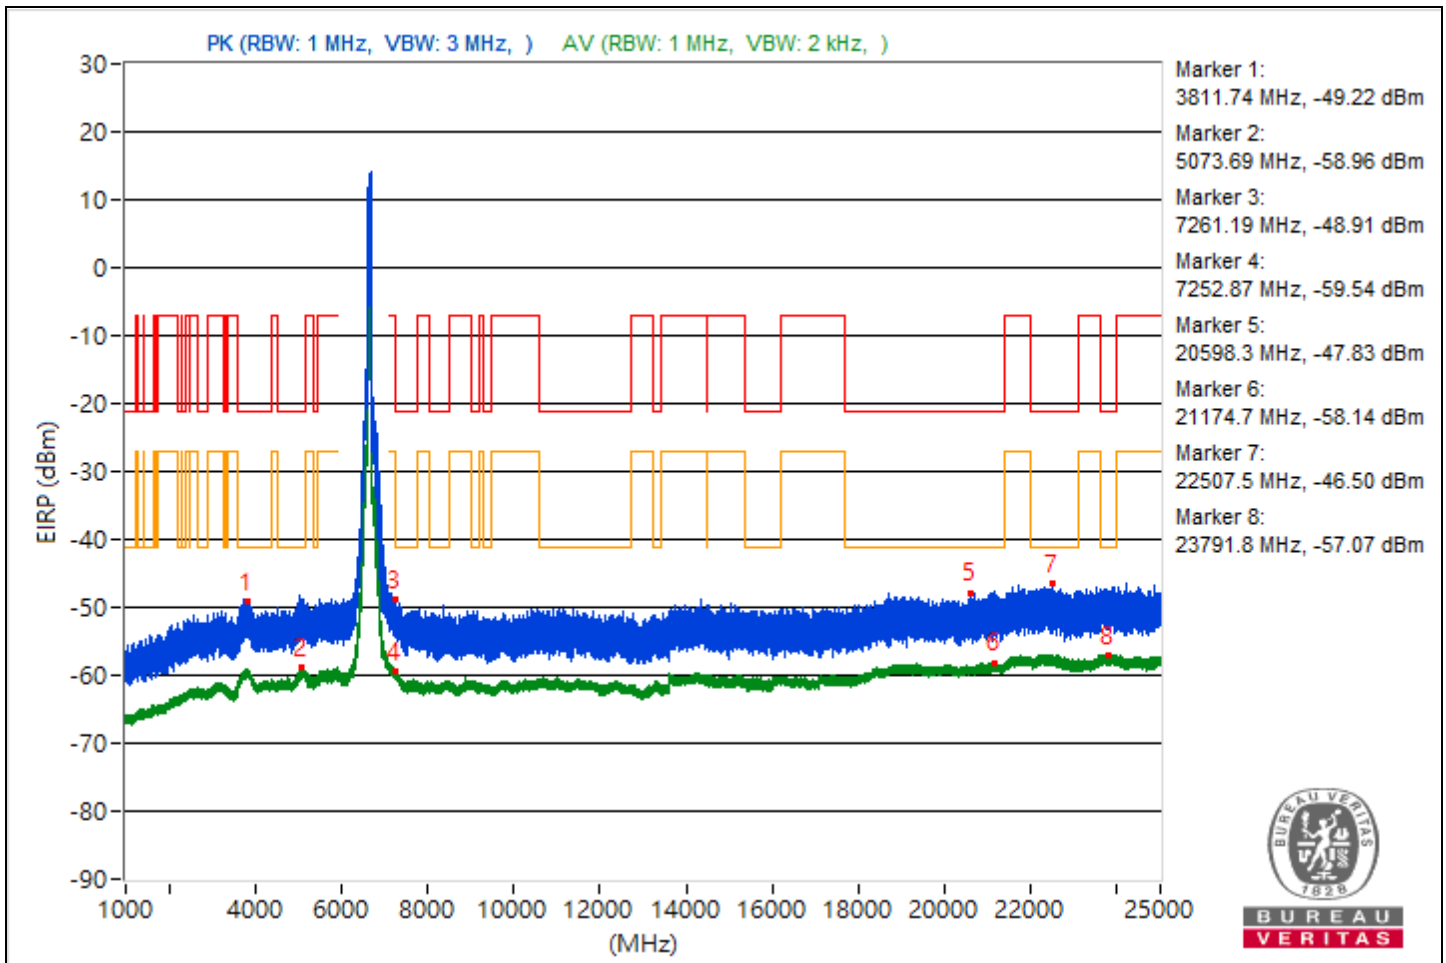

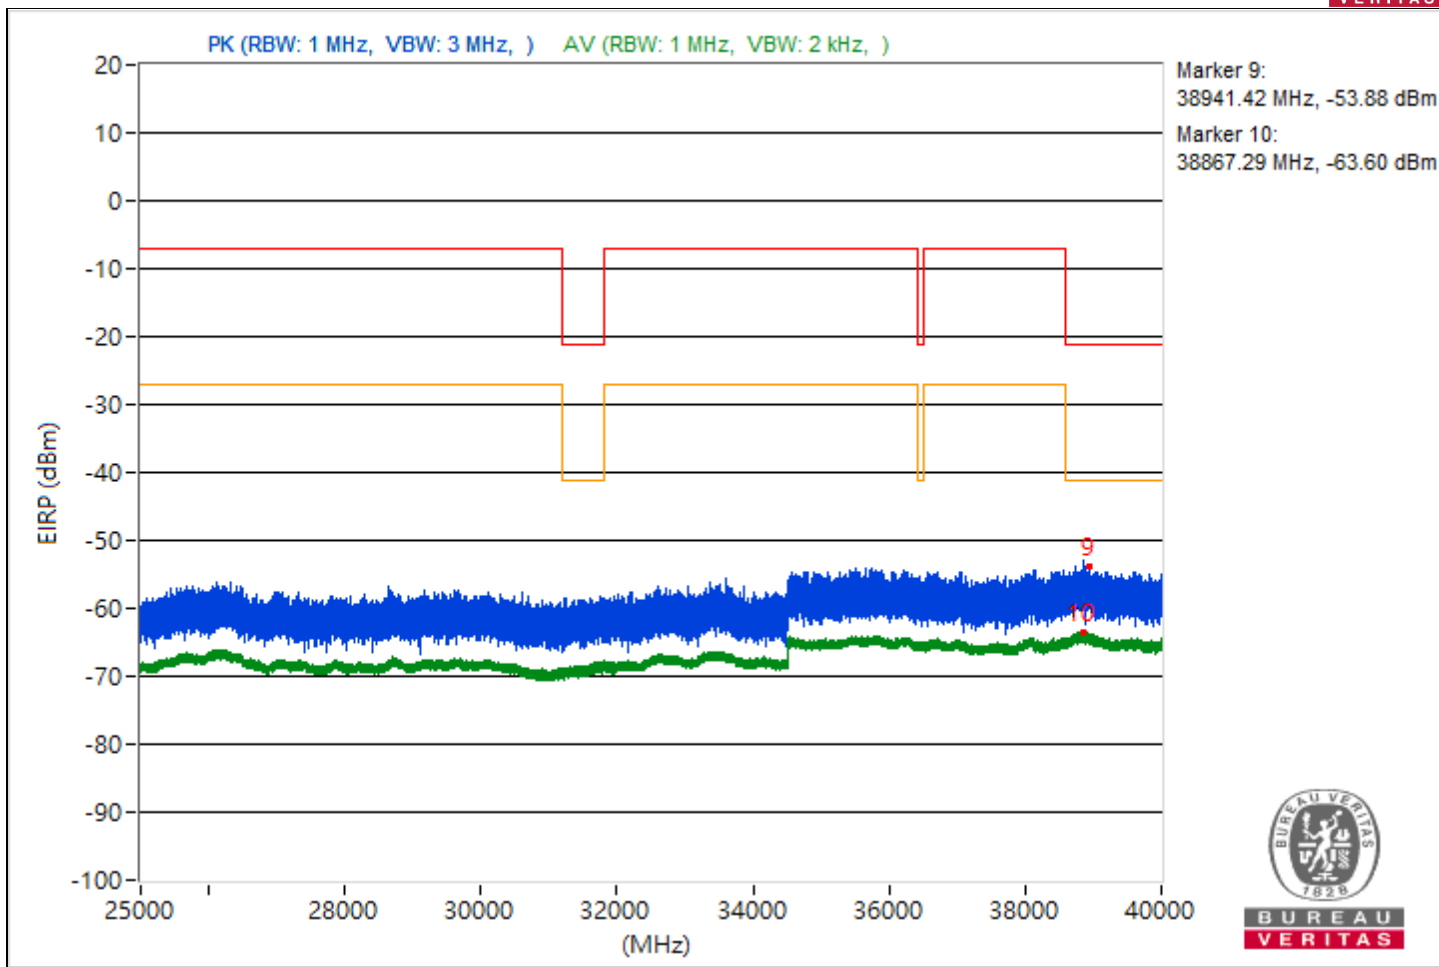





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5872.86	69.92 PK	88.26	-18.34	-31.04	-38.1	4.92	-25.34
2	#5871.77	59.18 AV	68.26	-9.08	-42.91	-45.5	4.92	-36.08
3	8033.33	49.14 PK	74	-24.86	-51.69	-59.66	4.92	-46.12
4	8033.33	46.23 AV	54	-7.77	-54.12	-67.99	4.92	-49.03
5	19352.2	48 PK	74	-26	-53.8	-57.24	4.92	-47.26
6	21170.4	36.89 AV	54	-17.11	-66.57	-66.04	4.92	-58.37
7	23638.8	48.12 PK	74	-25.88	-58.22	-53.26	4.92	-47.14
8	22331.1	38.07 AV	54	-15.93	-64.52	-65.81	4.92	-57.19
9	38837.6	41.26 PK	74	-32.74	-67.98	-59.49	4.92	-54
10	38867.2	31.77 AV	54	-22.23	-71.04	-71.85	4.92	-63.49

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

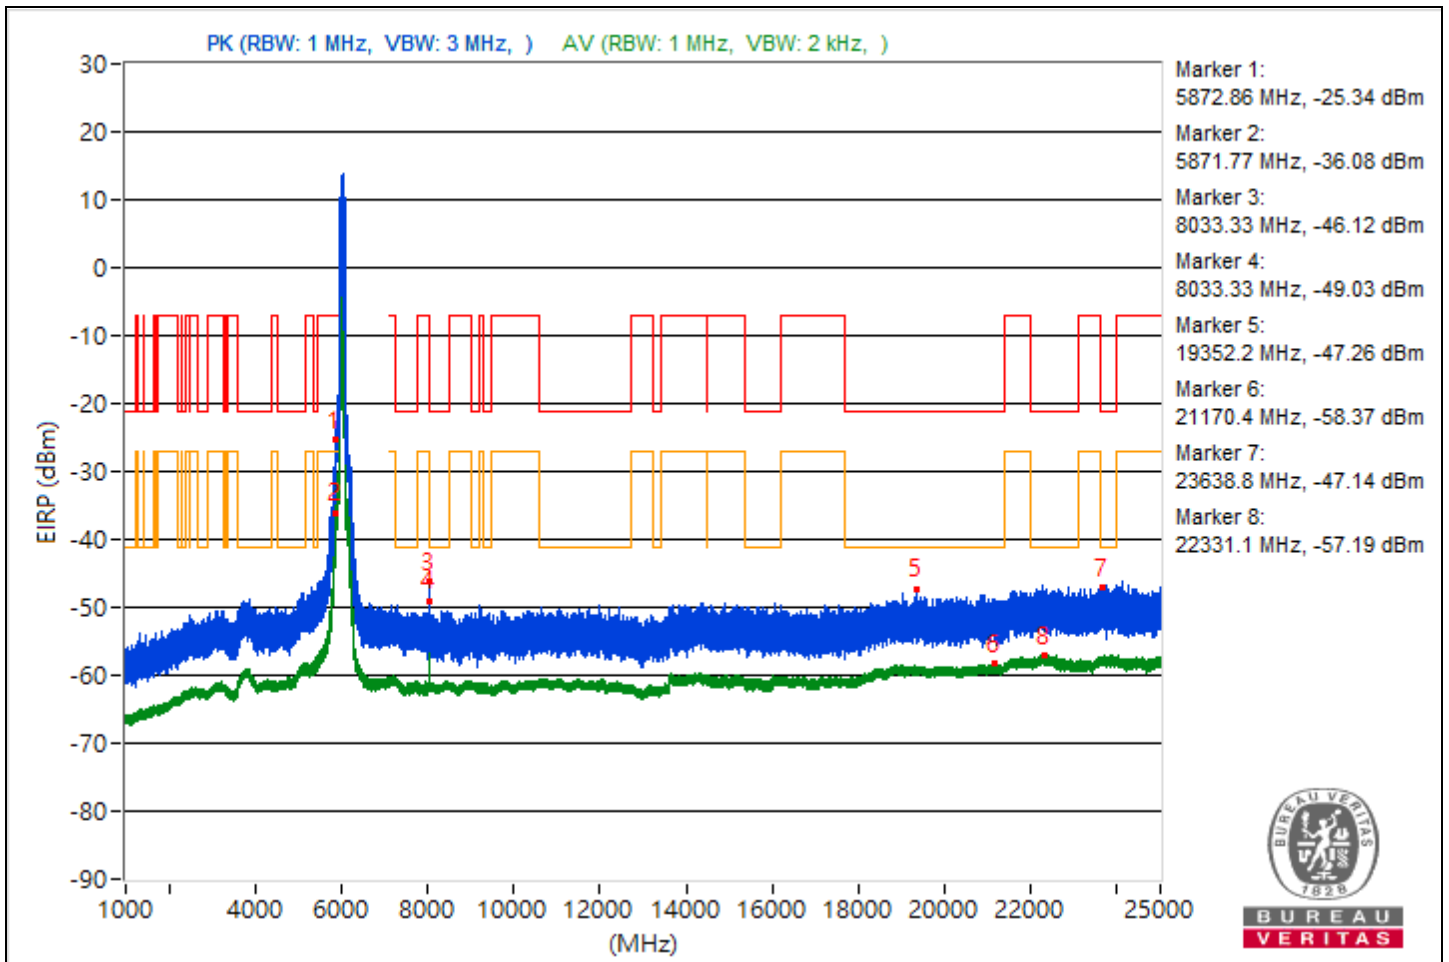

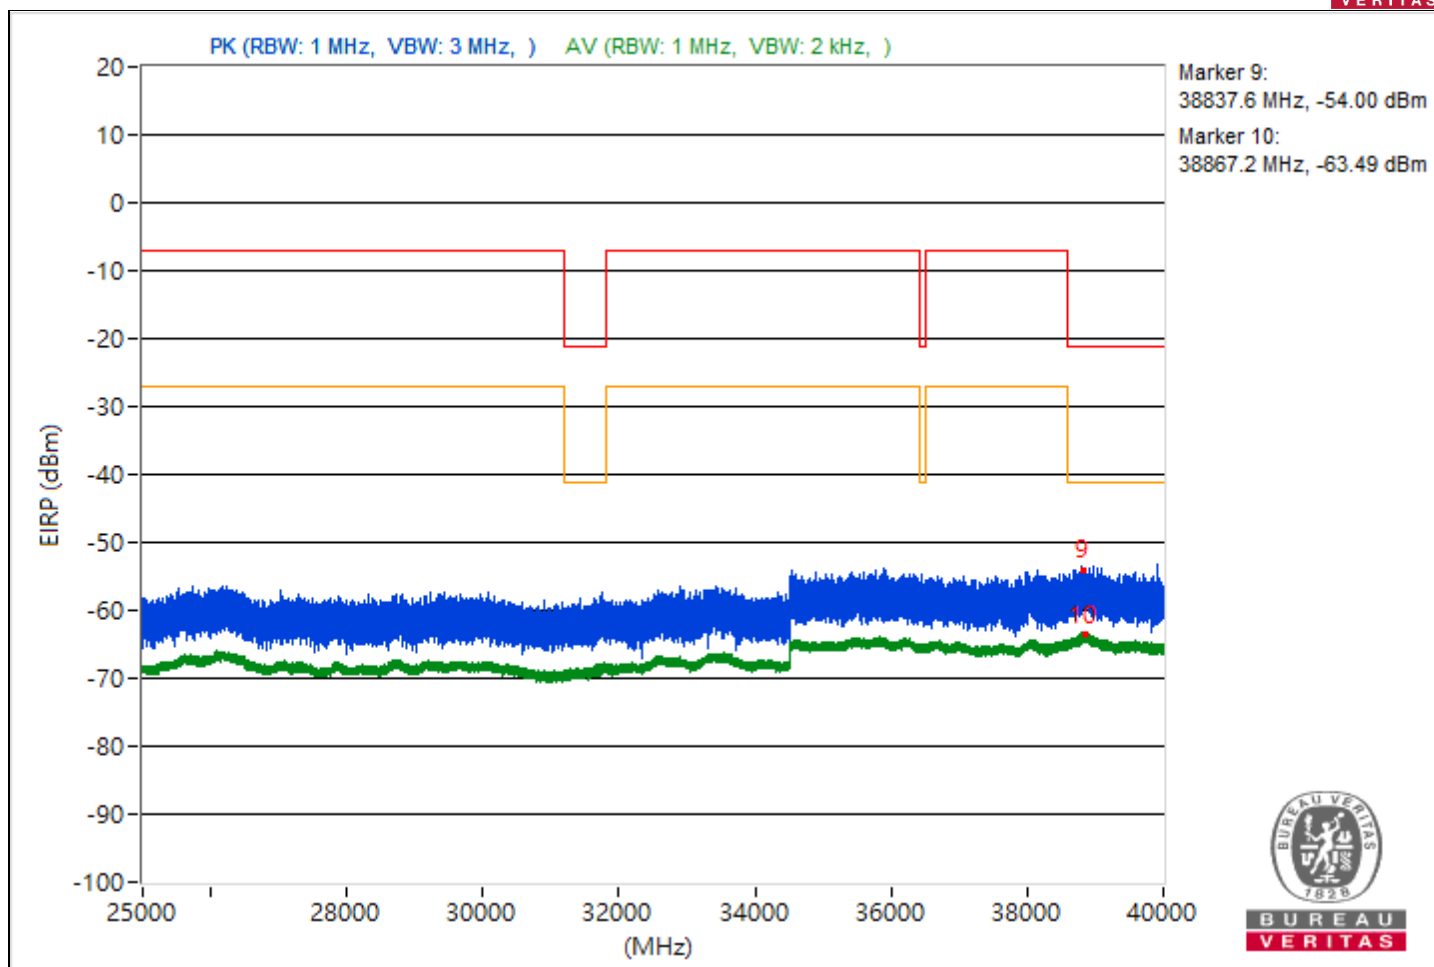





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.57	45.98 PK	74	-28.02	-60.41	-55.39	4.92	-49.28
2	5132.26	36.39 AV	54	-17.61	-67.16	-66.46	4.92	-58.87
3	15358.67	45.43 PK	74	-28.57	-55.69	-61.87	4.92	-49.83
4	8459.91	39.05 AV	54	-14.95	-62.02	-68.43	4.92	-56.21
5	21297.5	46.93 PK	74	-27.07	-60.12	-54.26	4.92	-48.33
6	21068.6	36.94 AV	54	-17.06	-65.72	-66.86	4.92	-58.32
7	23853	48.96 PK	74	-25.04	-57.03	-52.54	4.92	-46.3
8	23883.1	38.26 AV	54	-15.74	-64.22	-65.77	4.92	-57
9	38894.58	42.56 PK	74	-31.44	-59.5	-62.16	4.92	-52.7
10	38813.24	31.71 AV	54	-22.29	-71.96	-71.04	4.92	-63.55

Note: Margin value = Emission Level - Limit value

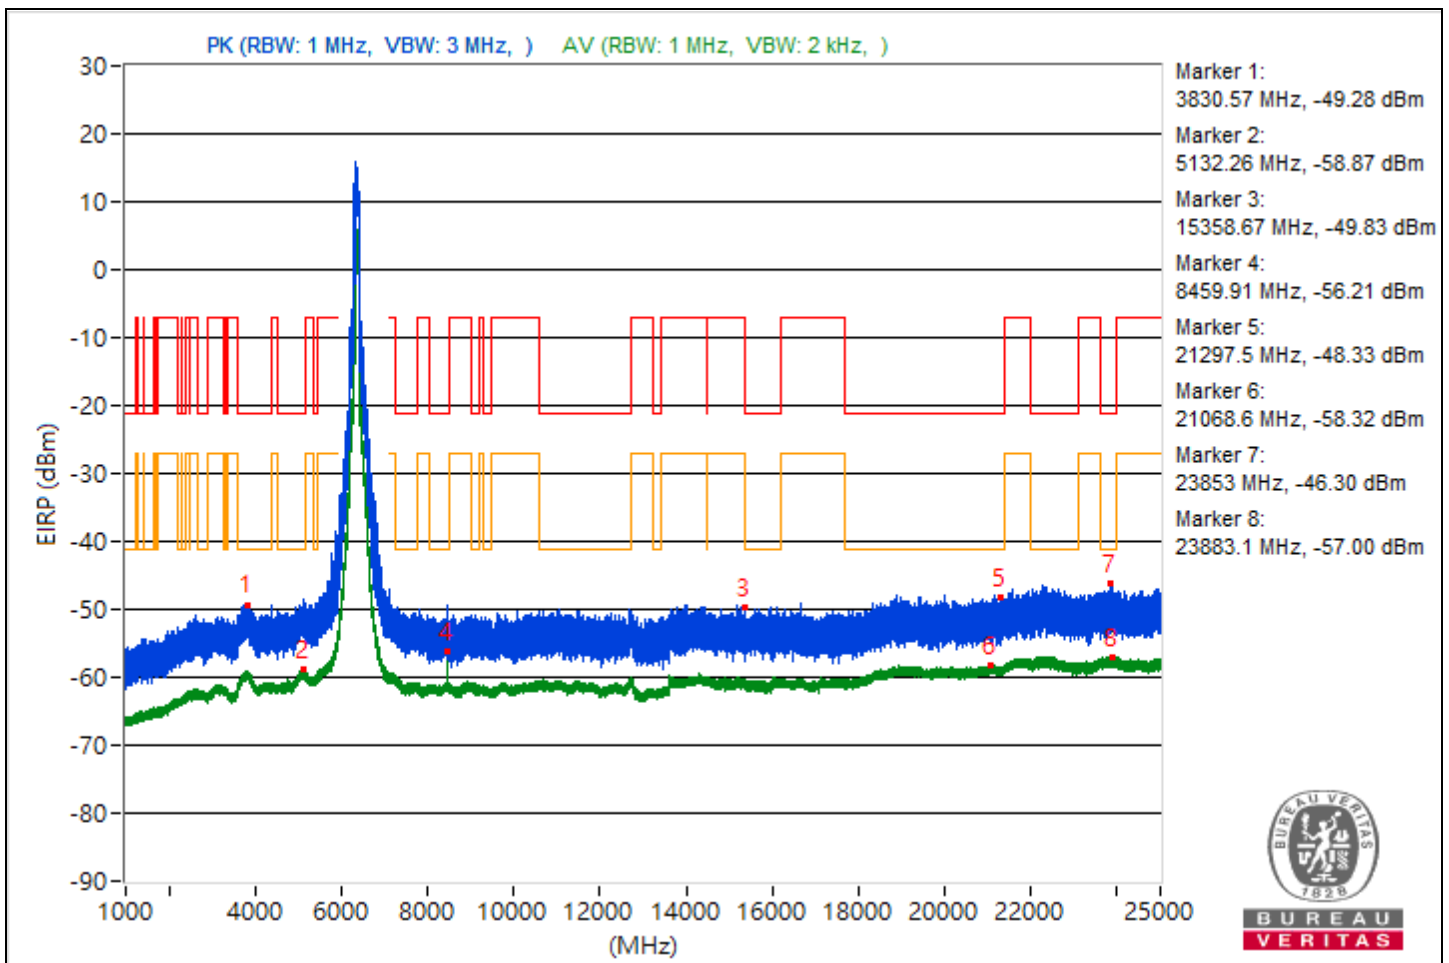


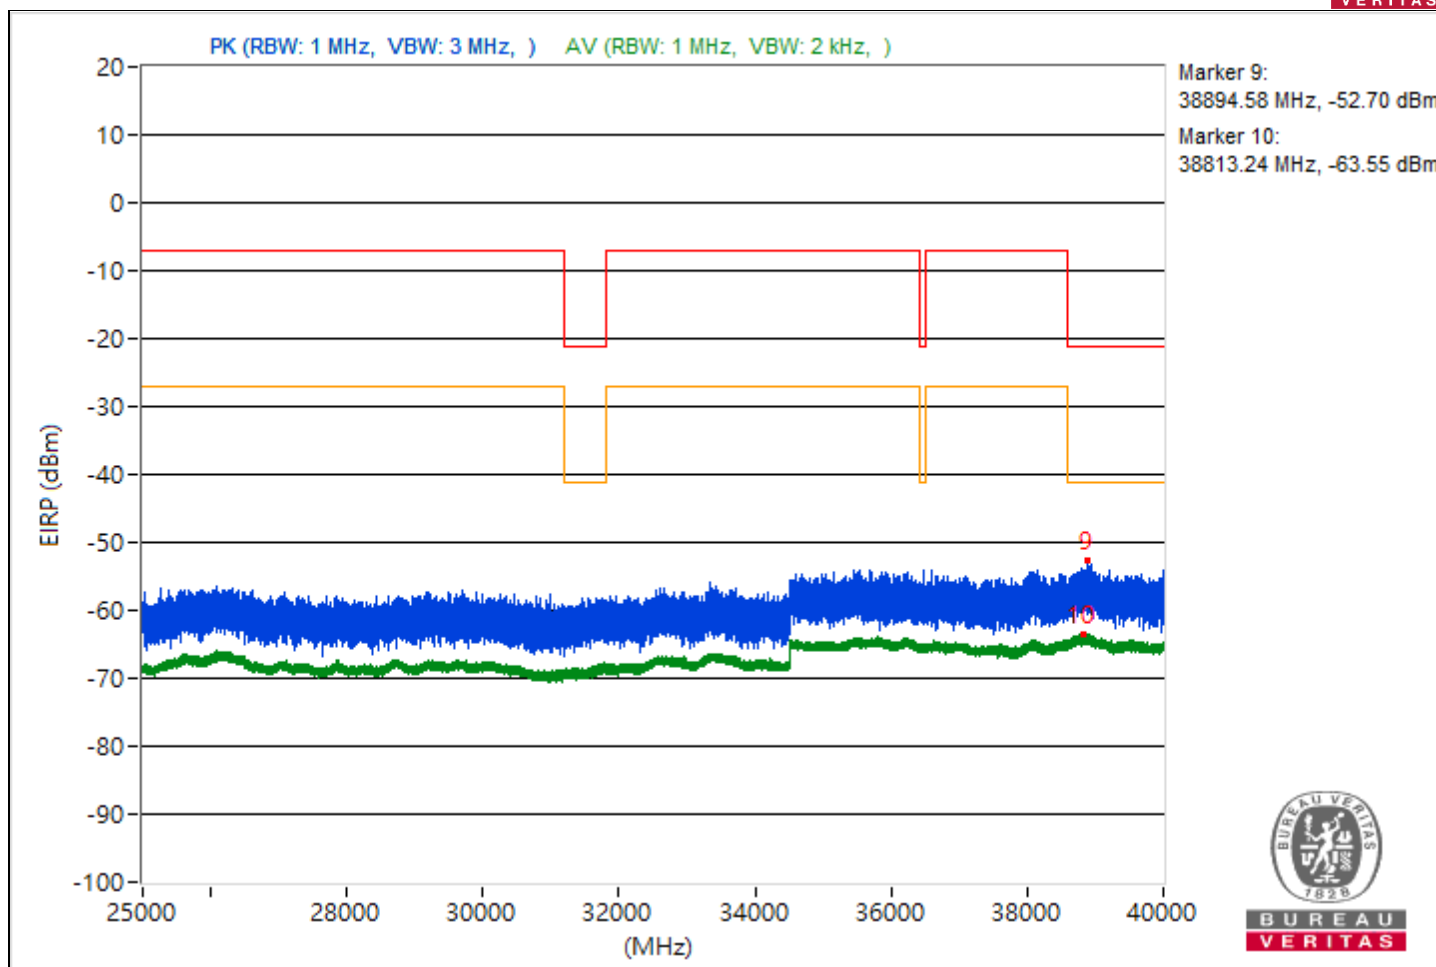


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.7	46.75 PK	74	-27.25	-54.44	-60.25	4.92	-48.51
2	3809.18	36 AV	54	-18	-66.8	-67.61	4.92	-59.26
3	7250.14	48.55 PK	74	-25.45	-52.94	-57.49	4.92	-46.71
4	7258.86	38.12 AV	54	-15.88	-65.62	-64.59	4.92	-57.14
5	20755.2	46.97 PK	74	-27.03	-60.11	-54.2	4.92	-48.29
6	21142.4	37.02 AV	54	-16.98	-65.71	-66.69	4.92	-58.24
7	23987.5	48.61 PK	74	-25.39	-52.24	-60	4.92	-46.65
8	22424	38.16 AV	54	-15.84	-64.46	-65.69	4.92	-57.1
9	38683.64	42.35 PK	74	-31.65	-62.27	-59.77	4.92	-52.91
10	38785.87	31.79 AV	54	-22.21	-71.04	-71.79	4.92	-63.47

Note: Margin value = Emission Level - Limit value

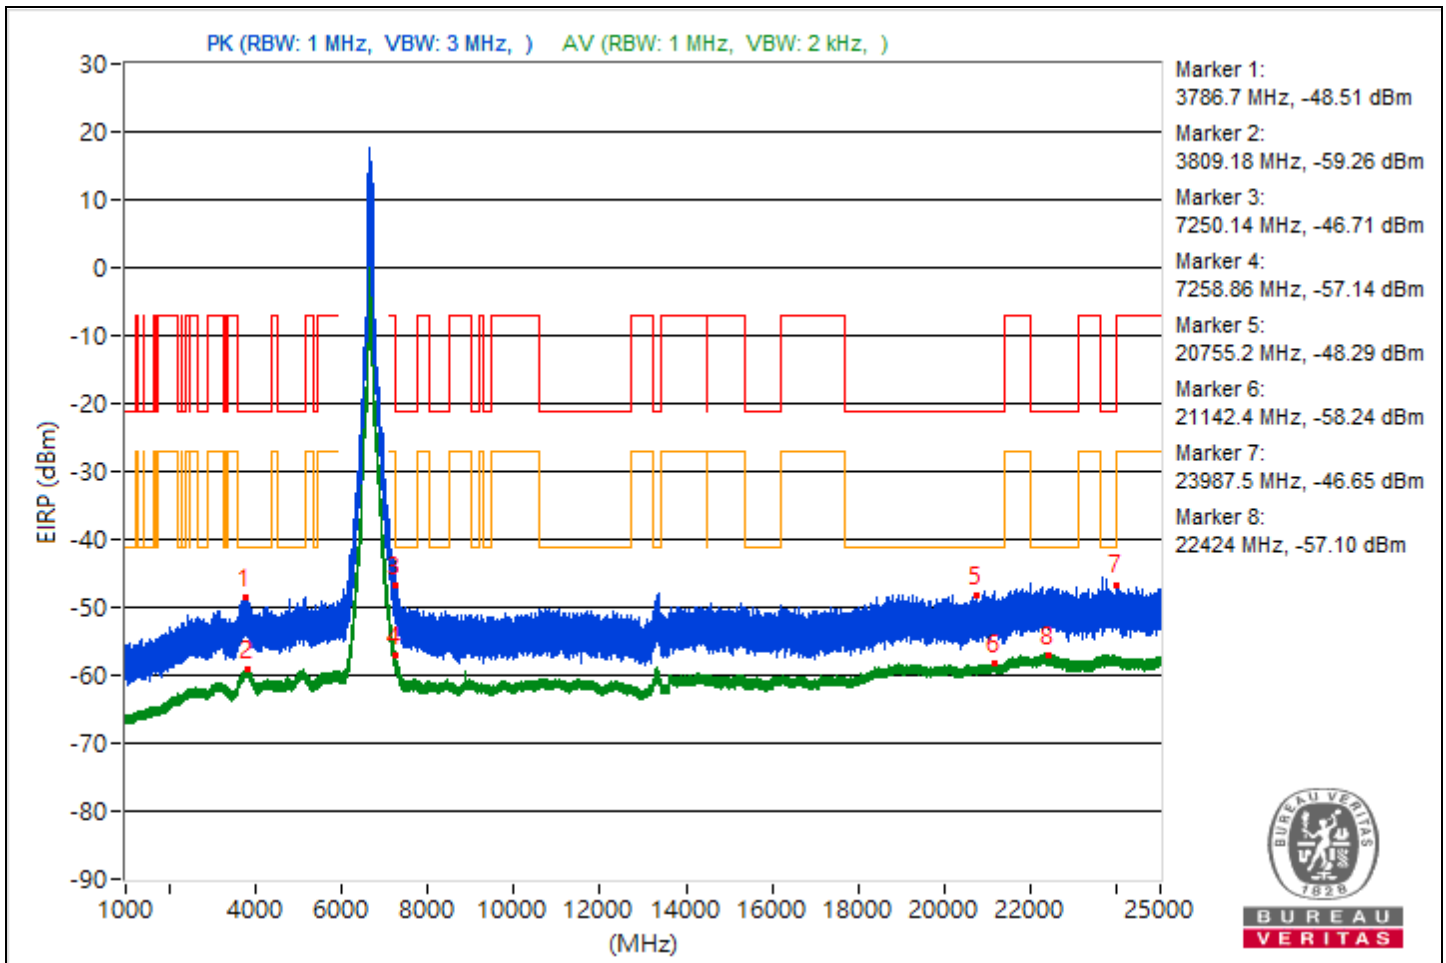

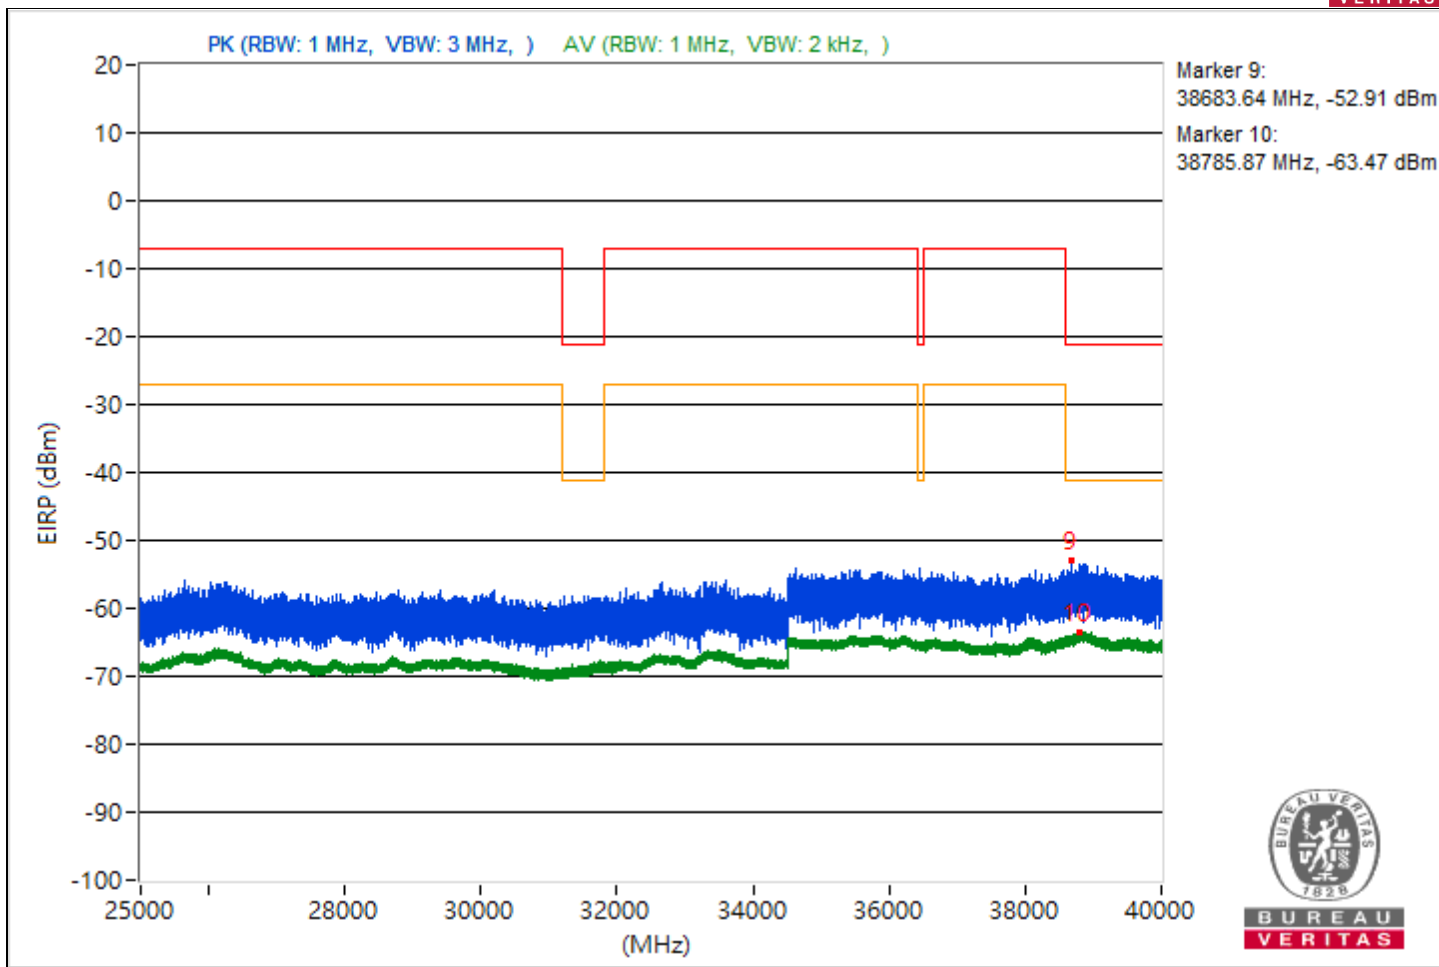


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.85	120.4 PK			15.53	18.66	4.76	25.14
2	*5955.7	110.33 AV			7.36	7.24	4.76	15.07
3	#5924.82	75.17 PK	88.26	-13.09	-31.3	-25.97	4.76	-20.09
4	#5924.82	61.94 AV	68.26	-6.32	-41.01	-41.18	4.76	-33.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

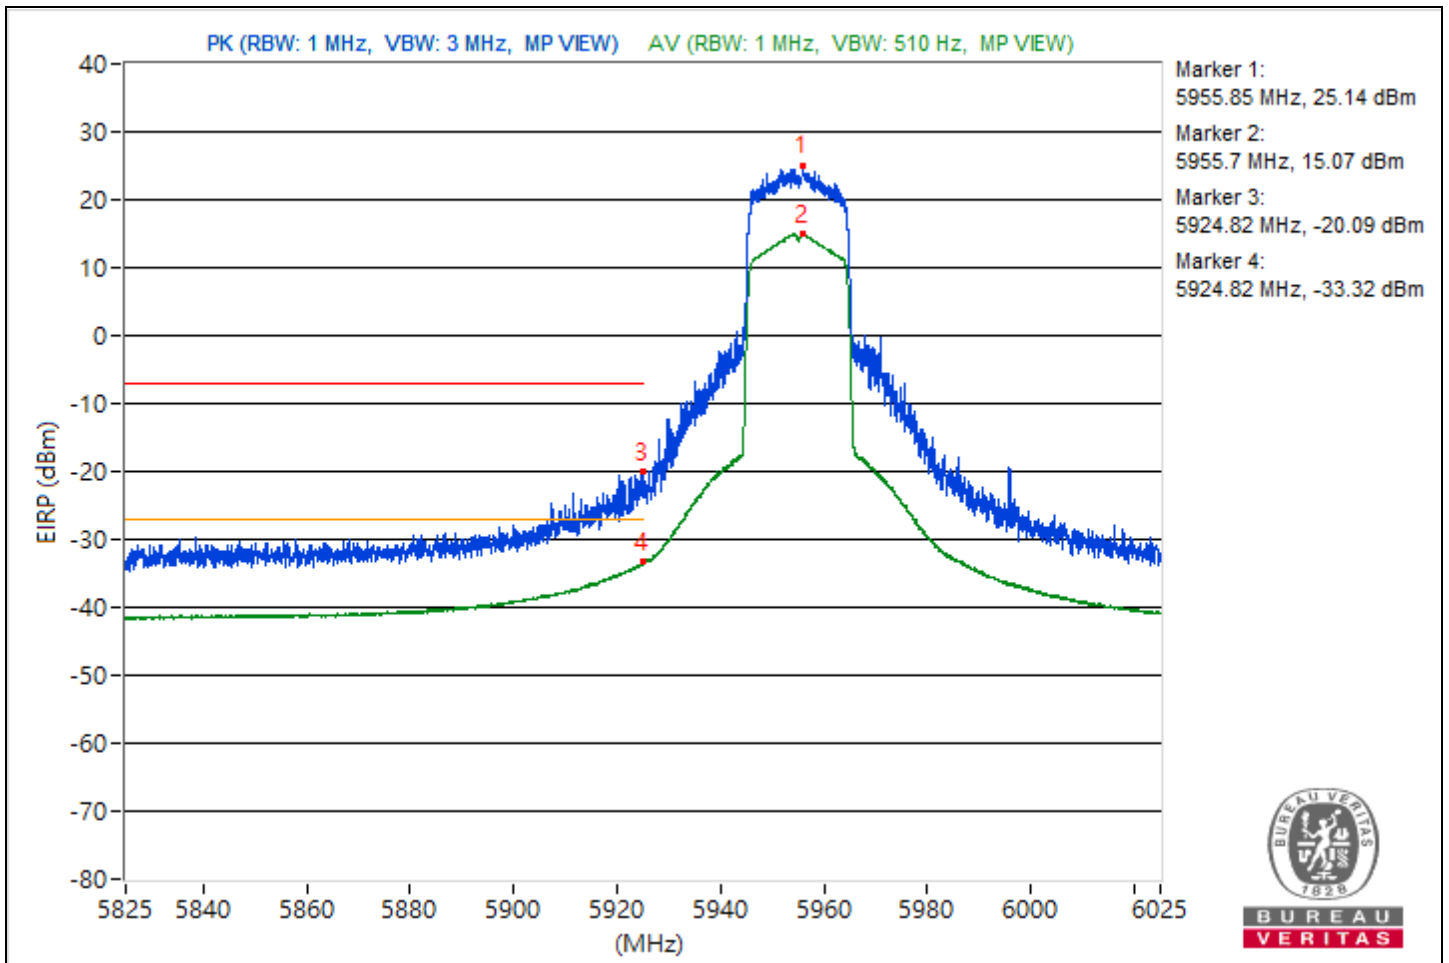


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6853.87	117.84 PK			15.67	14.12	4.61	22.58
2	*6854.21	107.3 AV			4.4	4.44	4.61	12.04
3	#7202.96	55.41 PK	88.26	-32.85	-50.3	-45.77	4.61	-39.85
4	#7127.25	44.19 AV	68.26	-24.07	-58.54	-58.85	4.61	-51.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

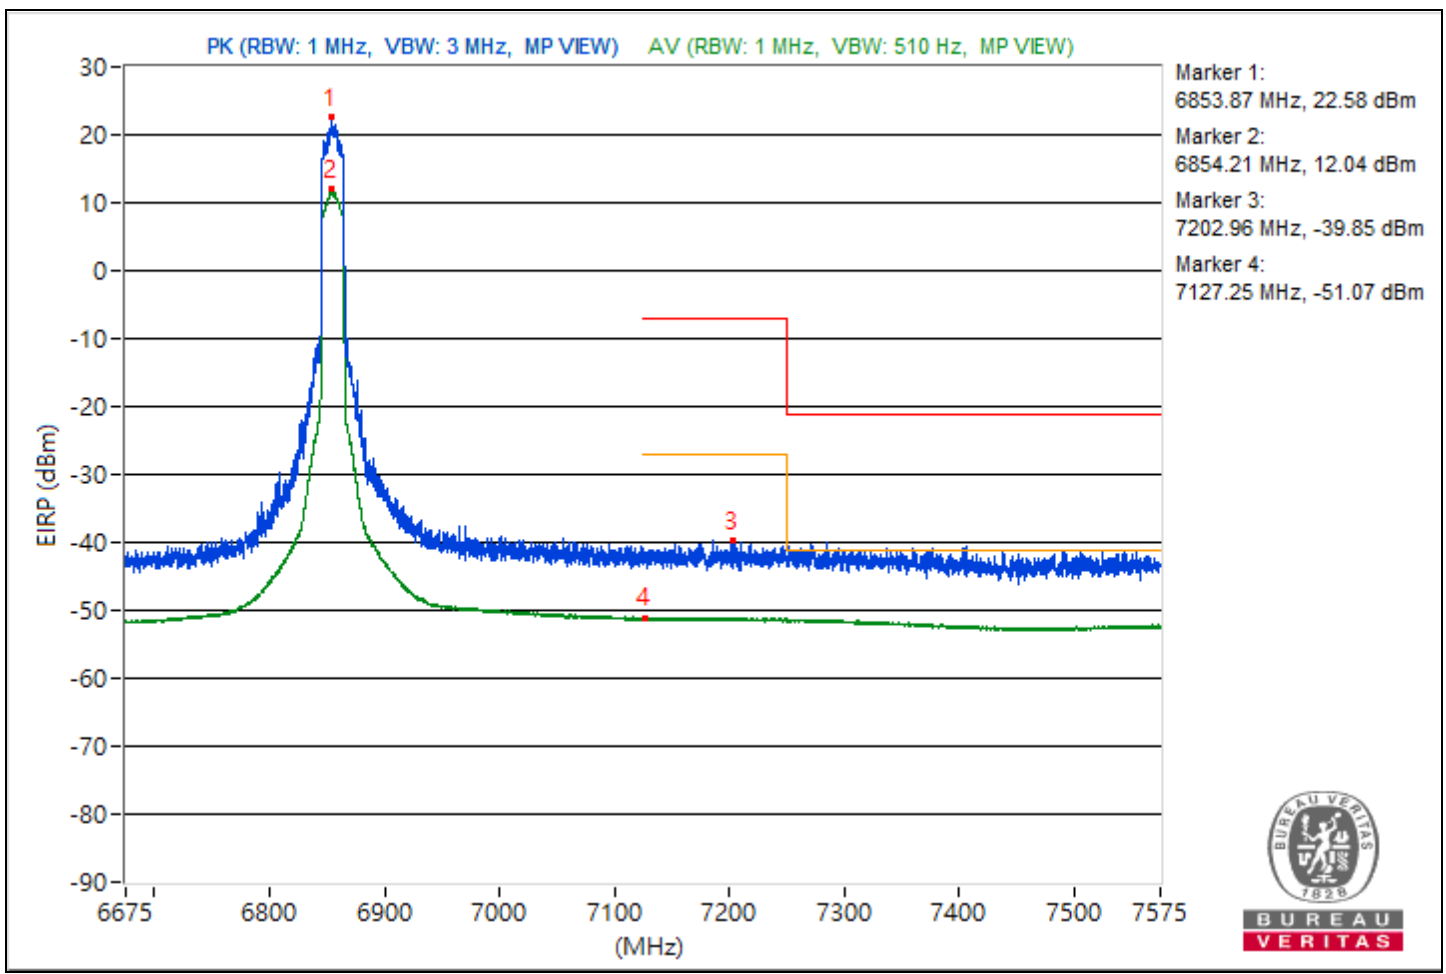


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5969.37	117.59 PK			15.25	13.74	4.76	22.33
2	*5966.32	107.12 AV			4.12	4.07	4.76	11.86
3	#5924.98	84.71 PK	88.26	-3.55	-16.11	-23.08	4.76	-10.55
4	#5924.73	67.24 AV	68.26	-1.02	-35.84	-35.75	4.76	-28.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

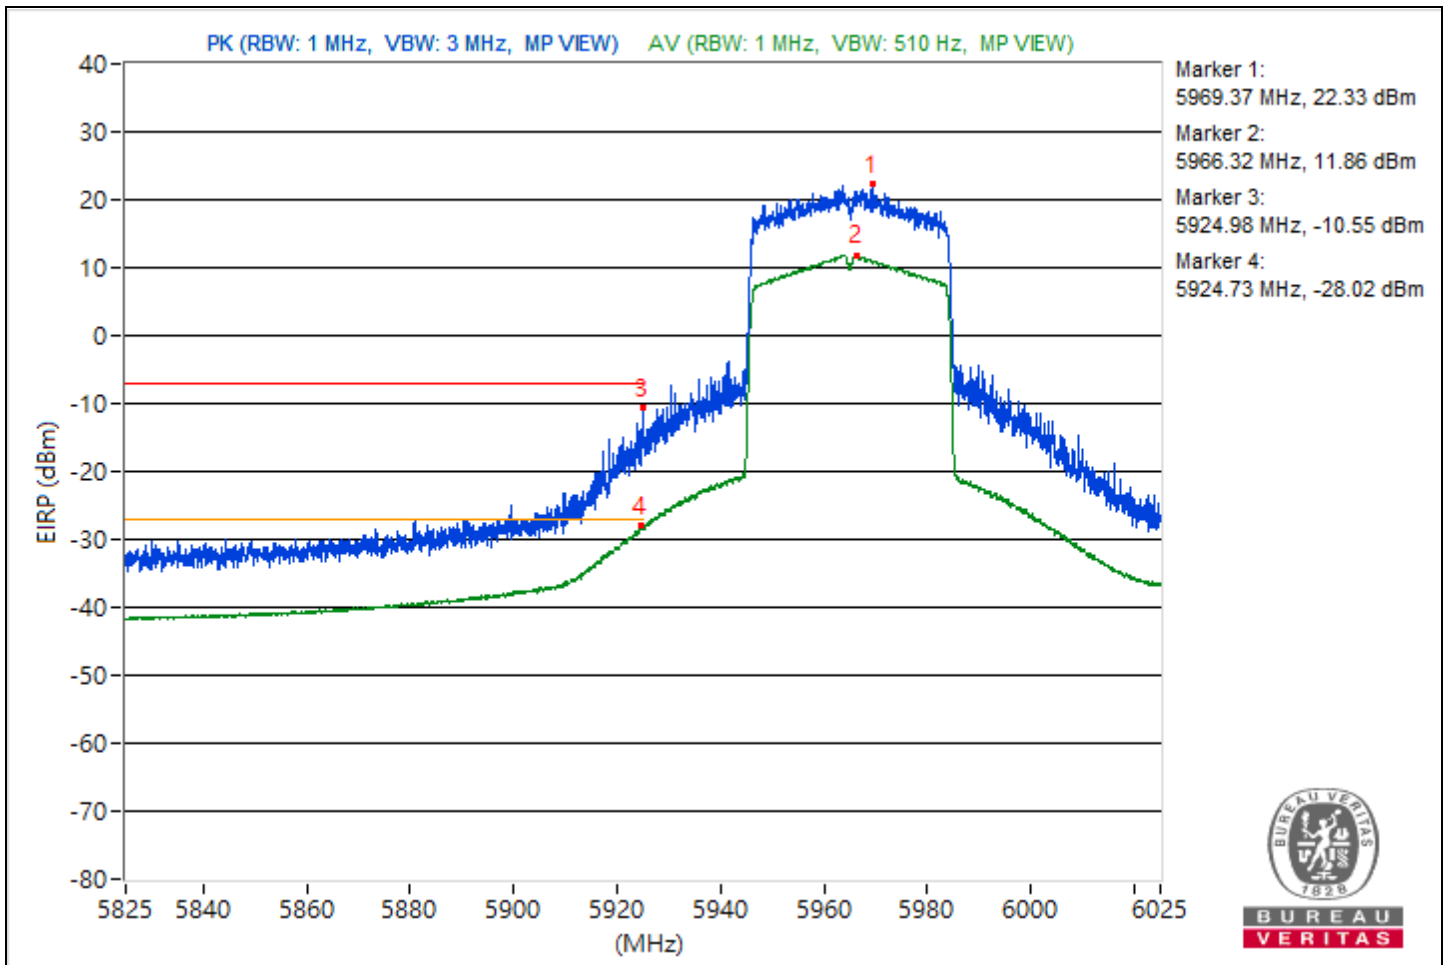


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6844.09	117.46 PK			13.32	15.56	4.61	22.2
2	*6843.86	108.22 AV			5.42	5.26	4.61	12.96
3	#7181.81	55.16 PK	88.26	-33.1	-49.32	-46.55	4.61	-40.1
4	#7133.55	44.16 AV	68.26	-24.1	-58.52	-58.93	4.61	-51.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

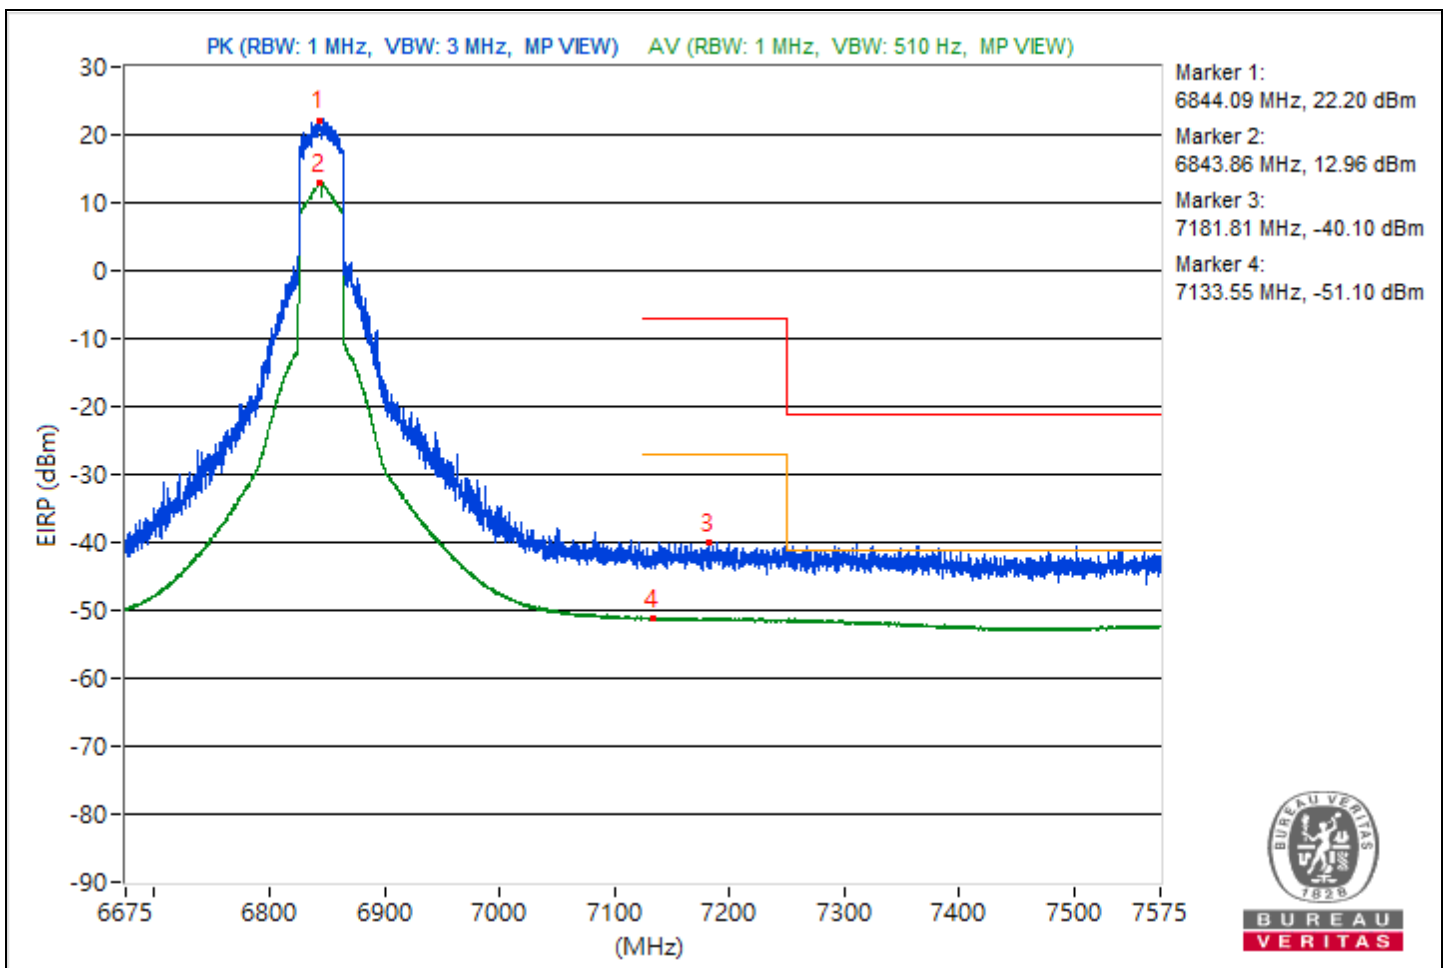


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5986.9	112.17 PK			11.15	5.29	4.76	16.91
2	*5987	101.59 AV			-0.79	-2.21	4.76	6.33
3	#5919.68	80.28 PK	88.26	-7.98	-20.35	-28.53	4.76	-14.98
4	#5923.62	67.43 AV	68.26	-0.83	-33.97	-38.25	4.76	-27.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

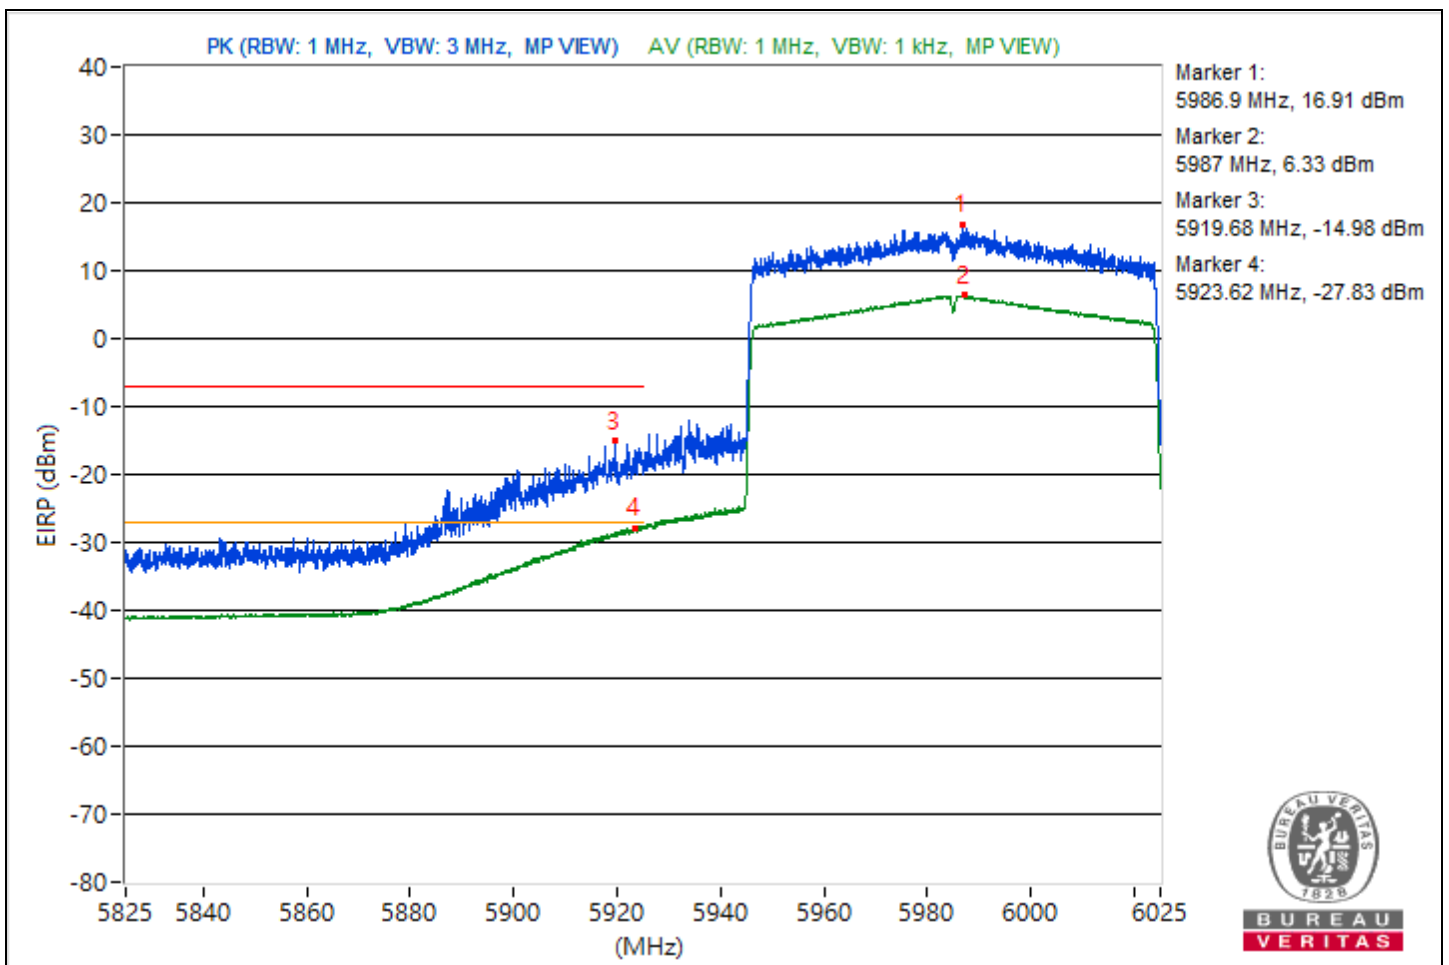


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6778.39	115.19 PK			13.77	10.08	4.61	19.93
2	*6783.9	105.43 AV			2.41	2.68	4.61	10.17
3	#7174.61	54.96 PK	88.26	-33.3	-47.07	-48.98	4.61	-40.3
4	#7125	44.72 AV	68.26	-23.54	-58.46	-57.88	4.61	-50.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

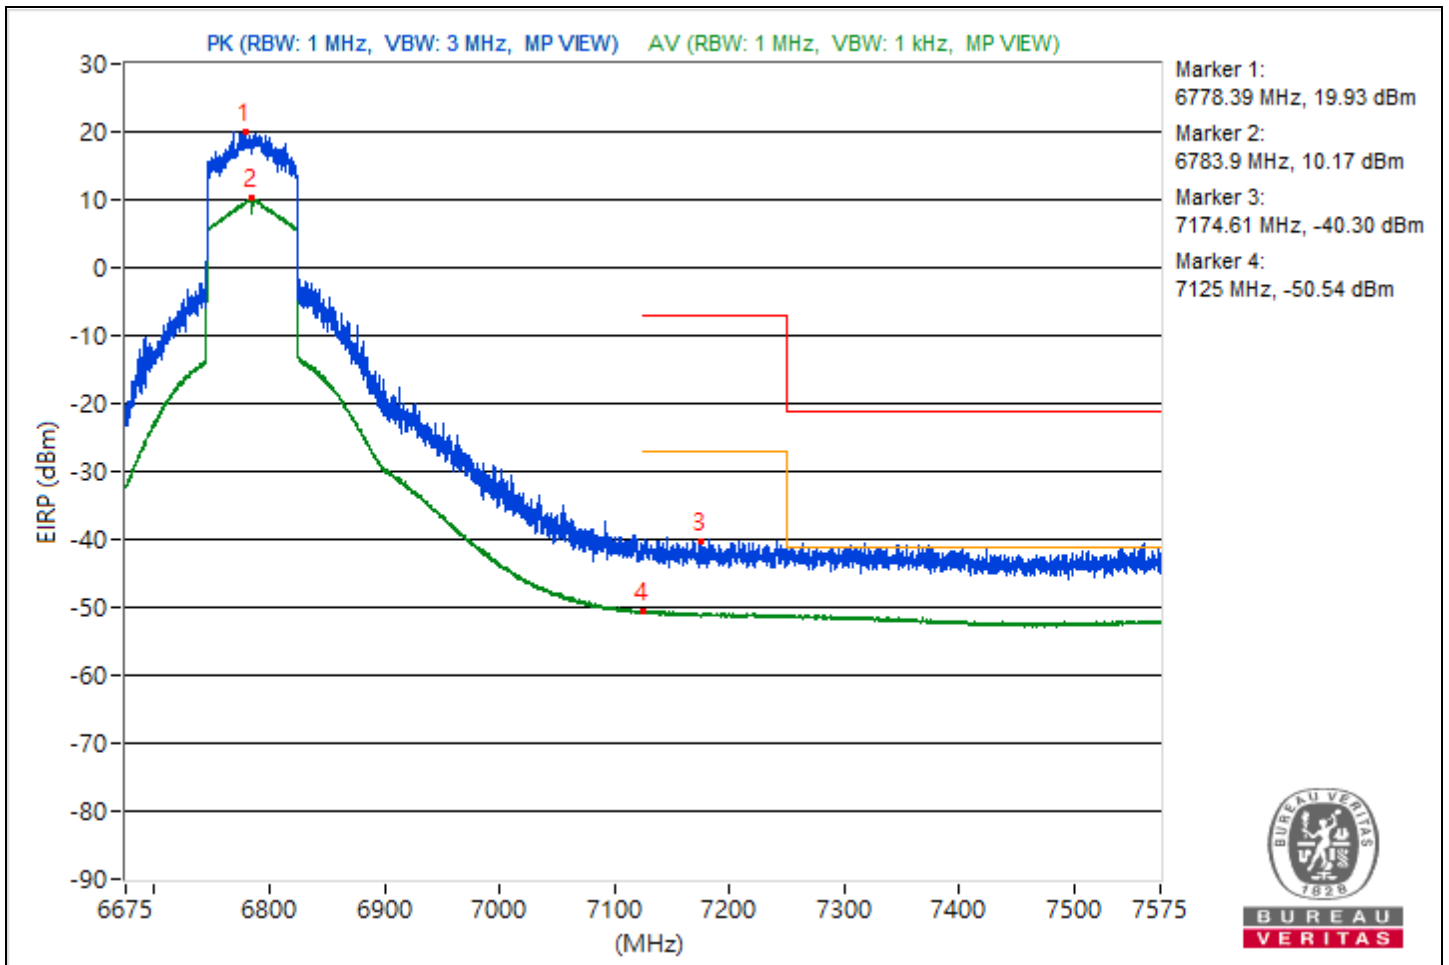


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6012.87	108.57 PK			3.45	6.95	4.76	13.31
2	*6023.3	98.49 AV			-4.59	-4.5	4.76	3.23
3	#5897.68	80.87 PK	88.26	-7.39	-20.8	-24.15	4.76	-14.39
4	#5923.4	67.22 AV	68.26	-1.04	-35.48	-36.16	4.76	-28.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

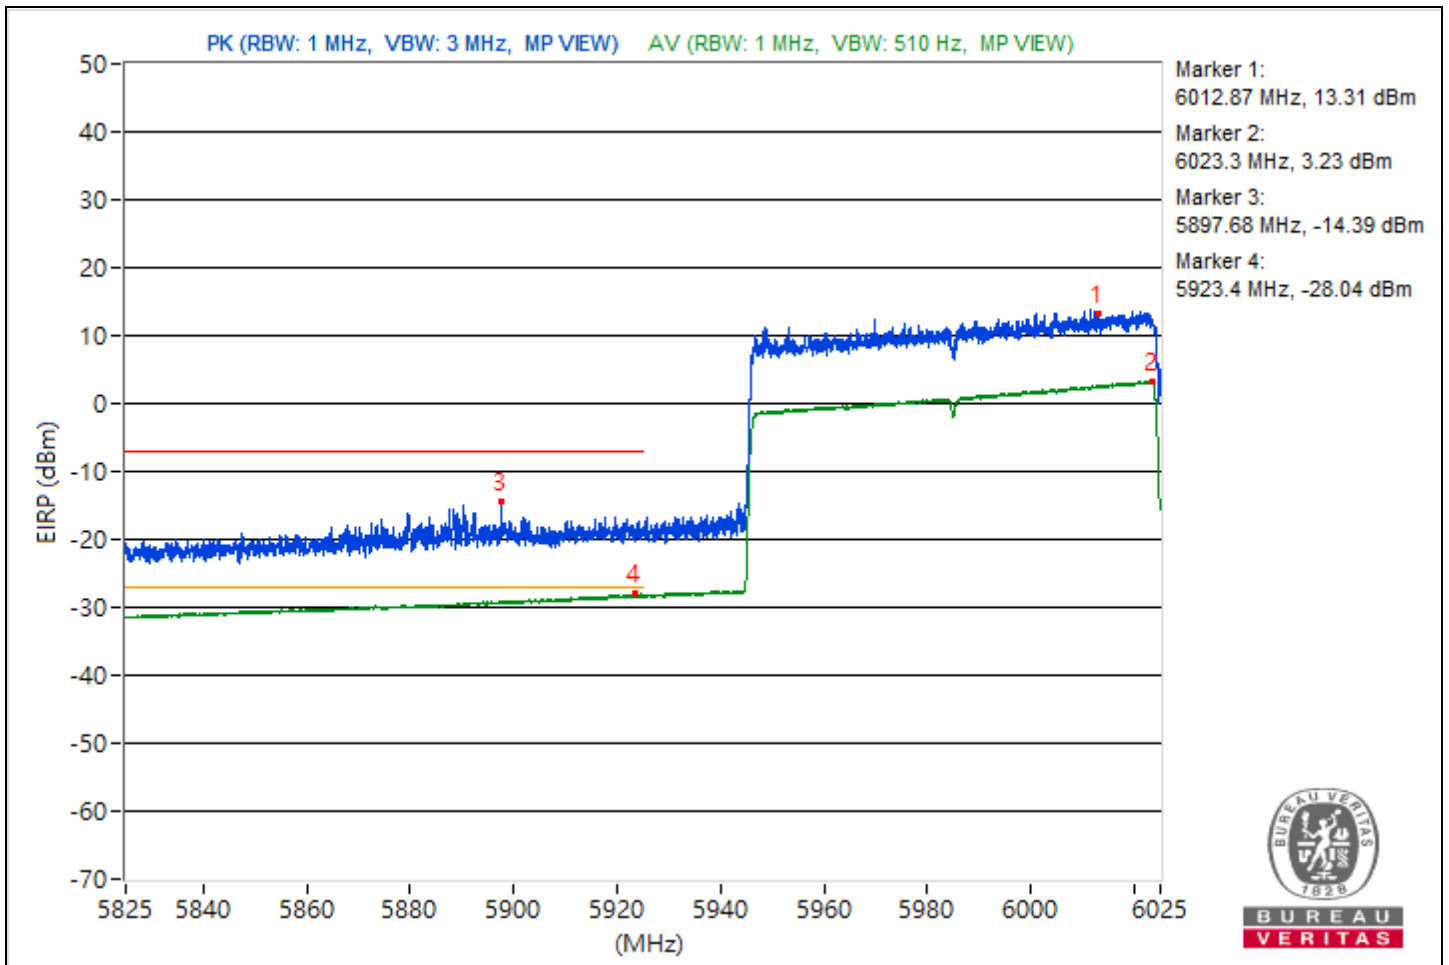


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6677.59	111.03 PK			7.39	8.79	4.61	15.77
2	*6675.34	101.55 AV			-1.44	-1.23	4.61	6.29
3	#7157.4	59.41 PK	88.26	-28.85	-41.12	-48.92	4.61	-35.85
4	#7129.27	46.15 AV	68.26	-22.11	-56.88	-56.59	4.61	-49.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

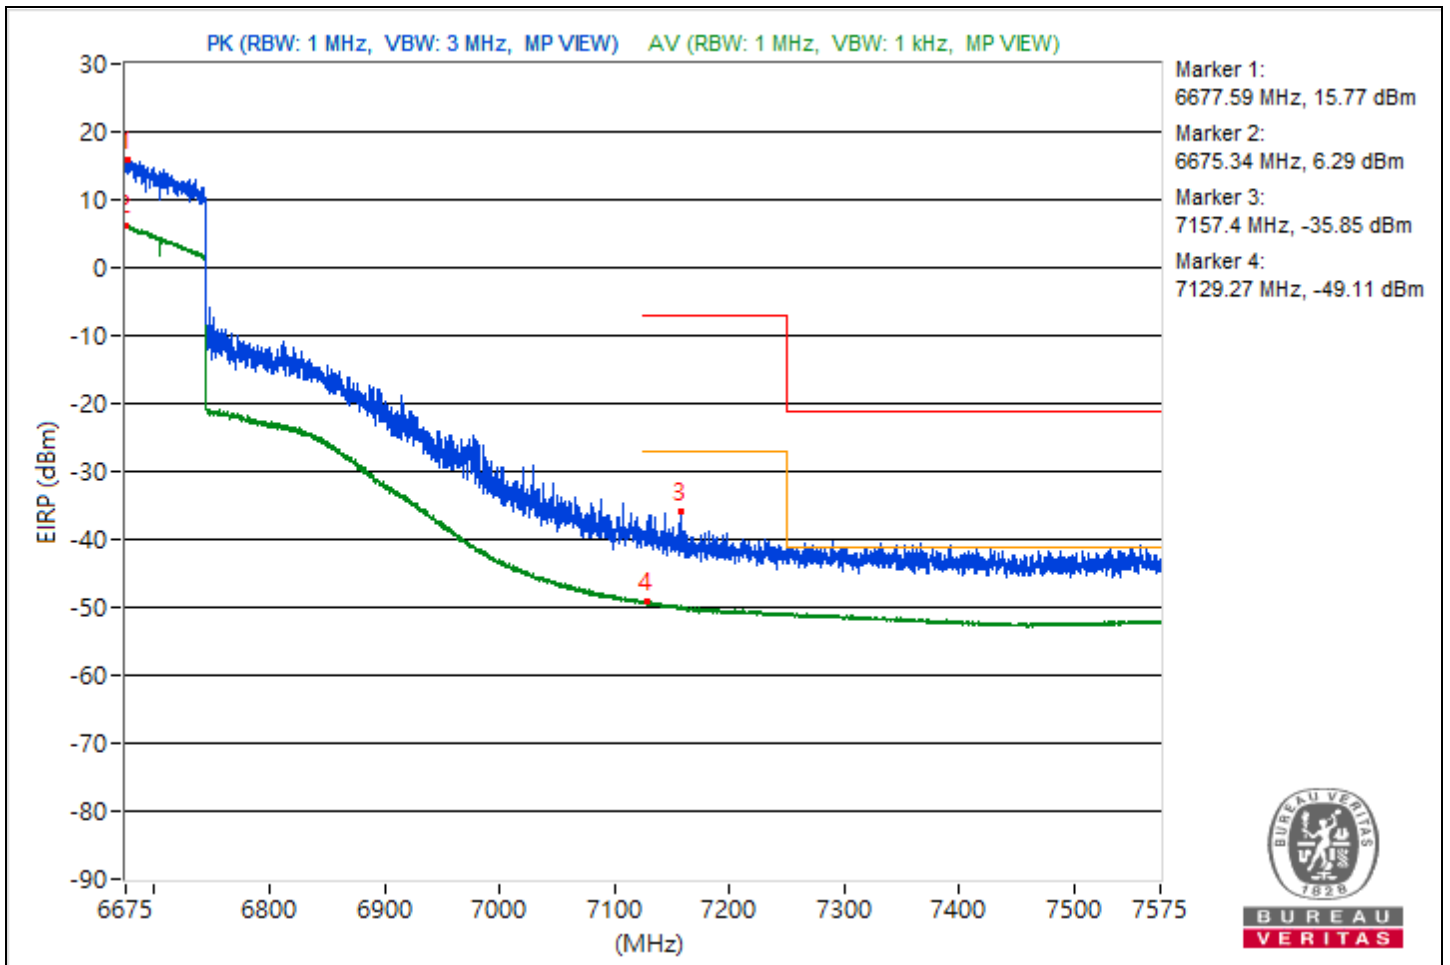


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.93	120.16 PK			18.31	15.49	4.76	24.9
2	*5946.68	108.93 AV			5.76	6.04	4.76	13.67
3	#5876.57	75.38 PK	88.26	-12.88	-26.5	-29.2	4.76	-19.88
4	#5846.73	63.71 AV	68.26	-4.55	-39.6	-39.05	4.76	-31.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

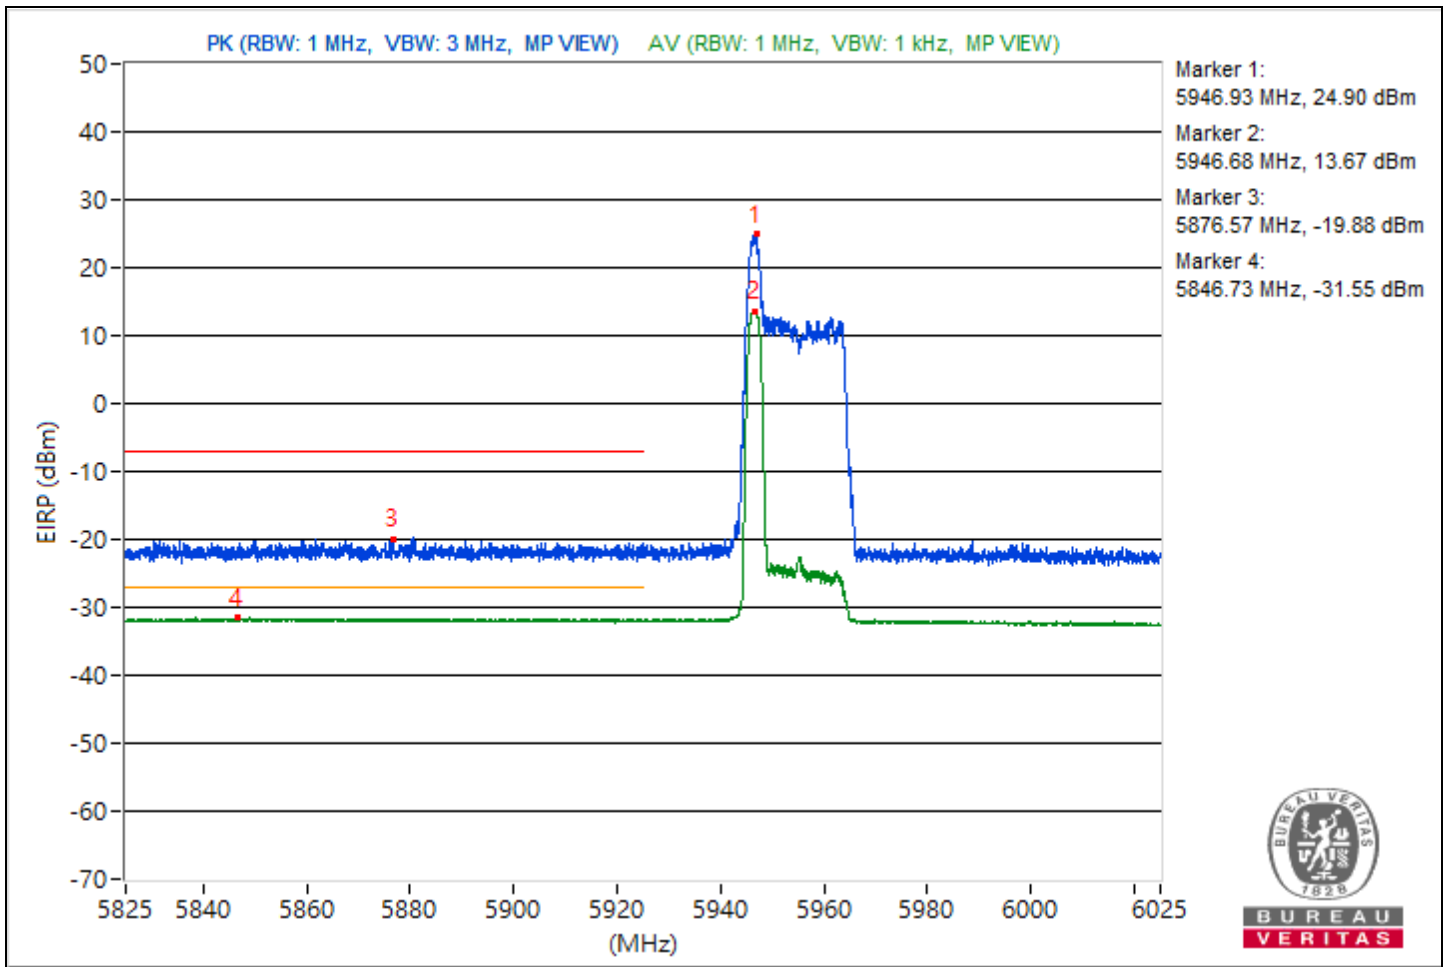


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.99	120.03 PK			18.36	15.47	4.61	24.77
2	*6863.21	109.65 AV			6.68	6.85	4.61	14.39
3	#7163.25	65.13 PK	88.26	-23.13	-38.59	-37.05	4.61	-30.13
4	#7207.35	53.8 AV	68.26	-14.46	-49.24	-48.92	4.61	-41.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

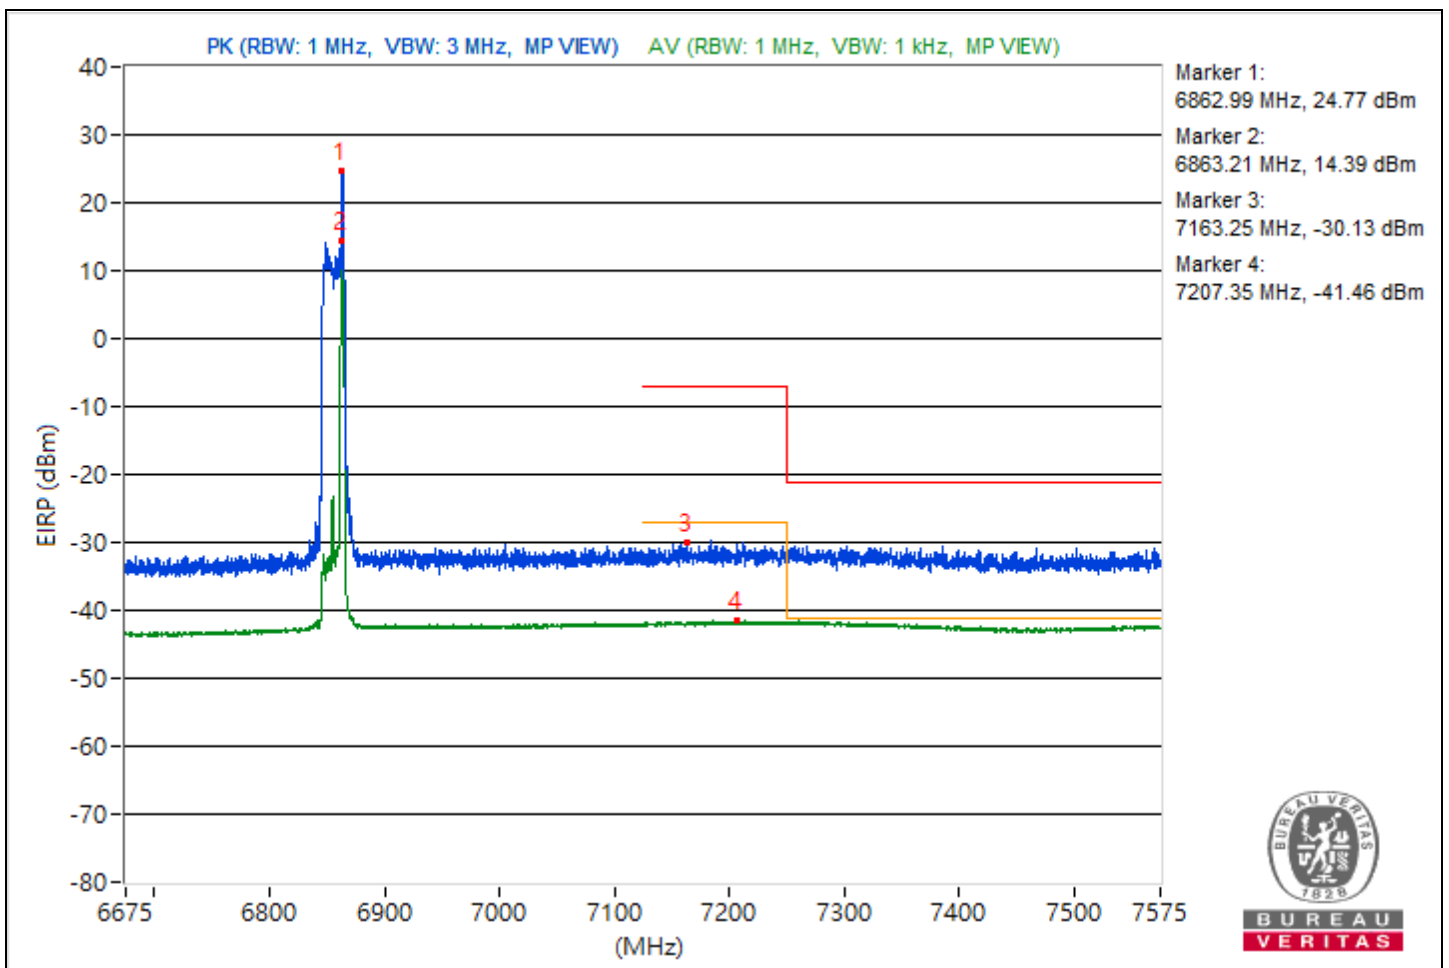


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5949.12	120.39 PK			18.66	15.49	4.76	25.13
2	*5947.68	109.3 AV			6.24	6.3	4.76	14.04
3	#5831.6	75.88 PK	88.26	-12.38	-28.17	-26.33	4.76	-19.38
4	#5905.43	63.54 AV	68.26	-4.72	-39.88	-39.14	4.76	-31.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

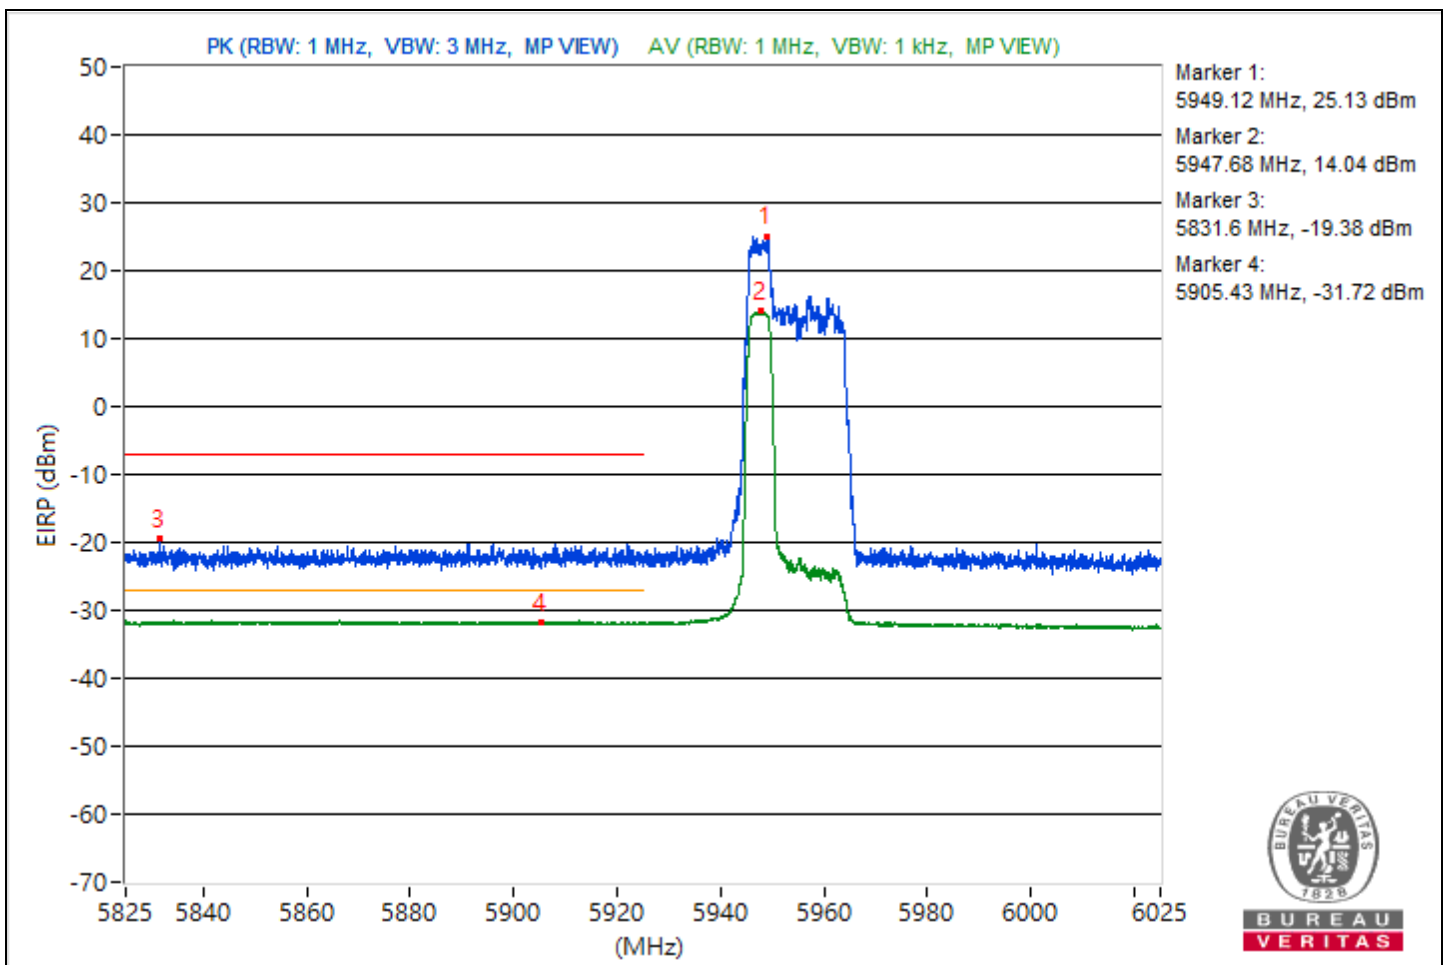


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6862.09	120.94 PK			19.5	15.89	4.61	25.68
2	*6862.43	109.73 AV			6.92	6.79	4.61	14.47
3	#7180.8	65.04 PK	88.26	-23.22	-36.85	-39.14	4.61	-30.22
4	#7216.69	53.58 AV	68.26	-14.68	-49.53	-49.08	4.61	-41.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

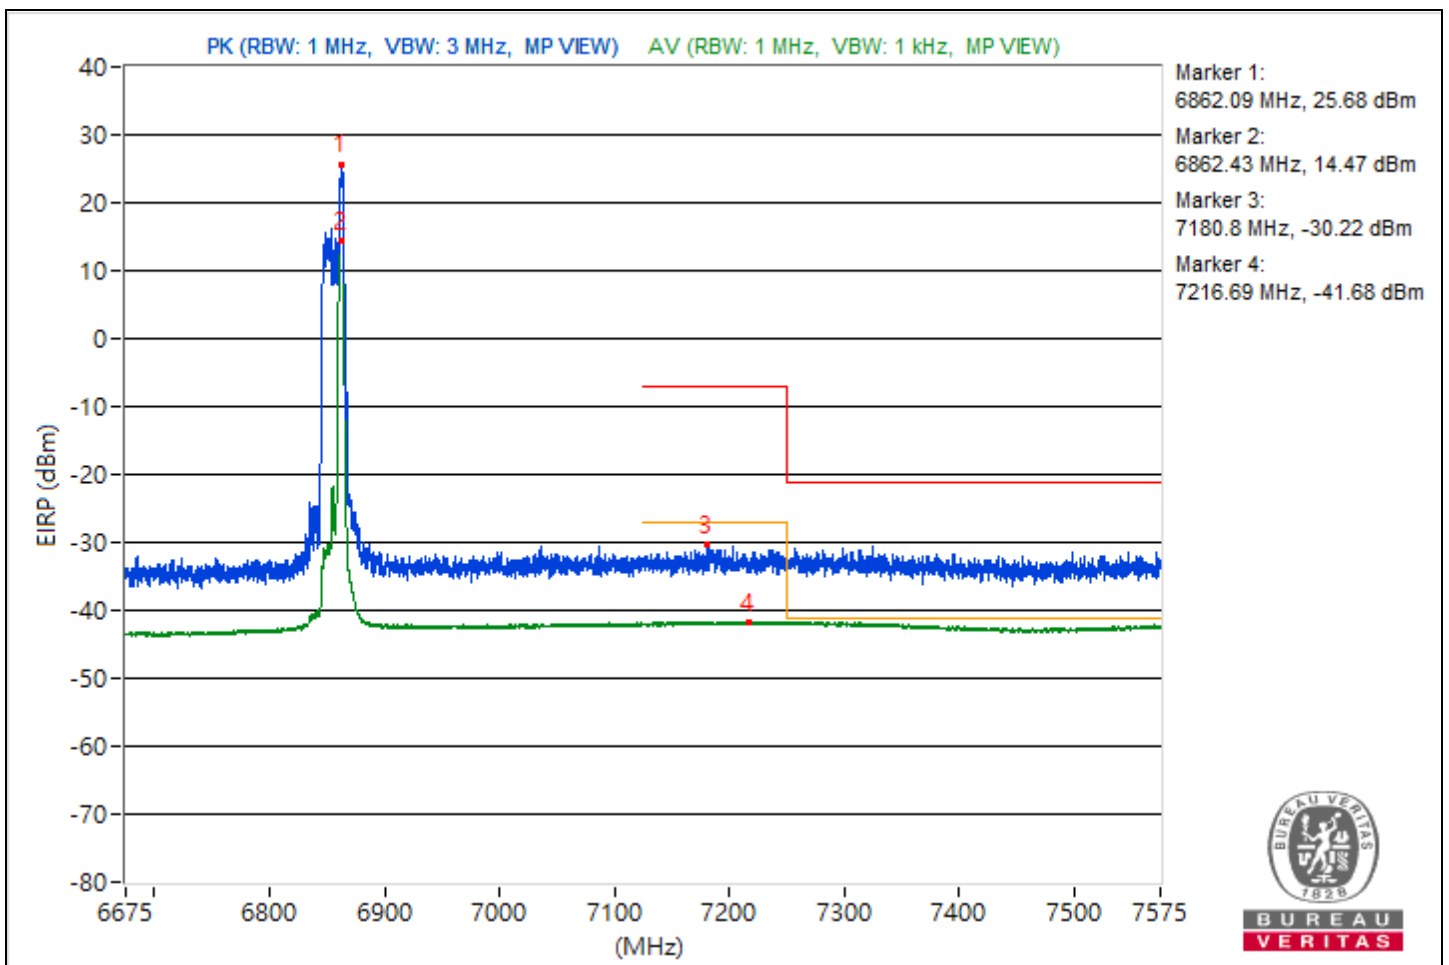


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5951.57	120.28 PK			14.81	18.8	4.76	25.02
2	*5951.32	109.04 AV			6.09	5.92	4.76	13.78
3	#5916.4	74.79 PK	88.26	-13.47	-29.93	-27.02	4.76	-20.47
4	#5924.68	63.82 AV	68.26	-4.44	-39.02	-39.41	4.76	-31.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

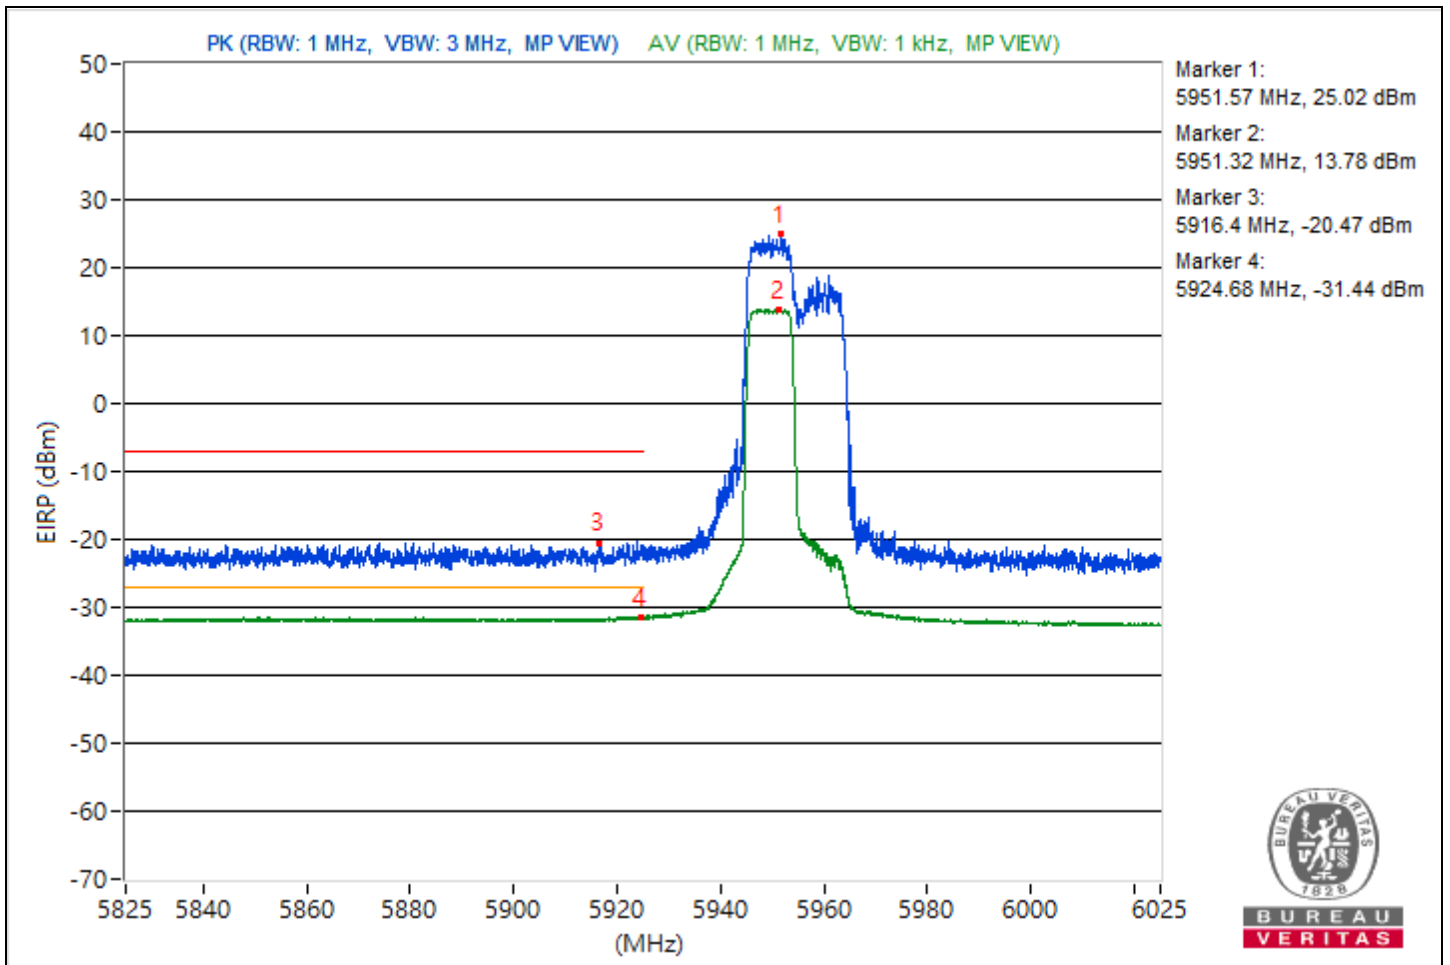


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6860.85	120.36 PK			16.59	18.22	4.61	25.1
2	*6859.84	109.51 AV			6.56	6.7	4.61	14.25
3	#7192.73	64.78 PK	88.26	-23.48	-36.18	-41.63	4.61	-30.48
4	#7189.12	53.64 AV	68.26	-14.62	-49.11	-49.38	4.61	-41.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

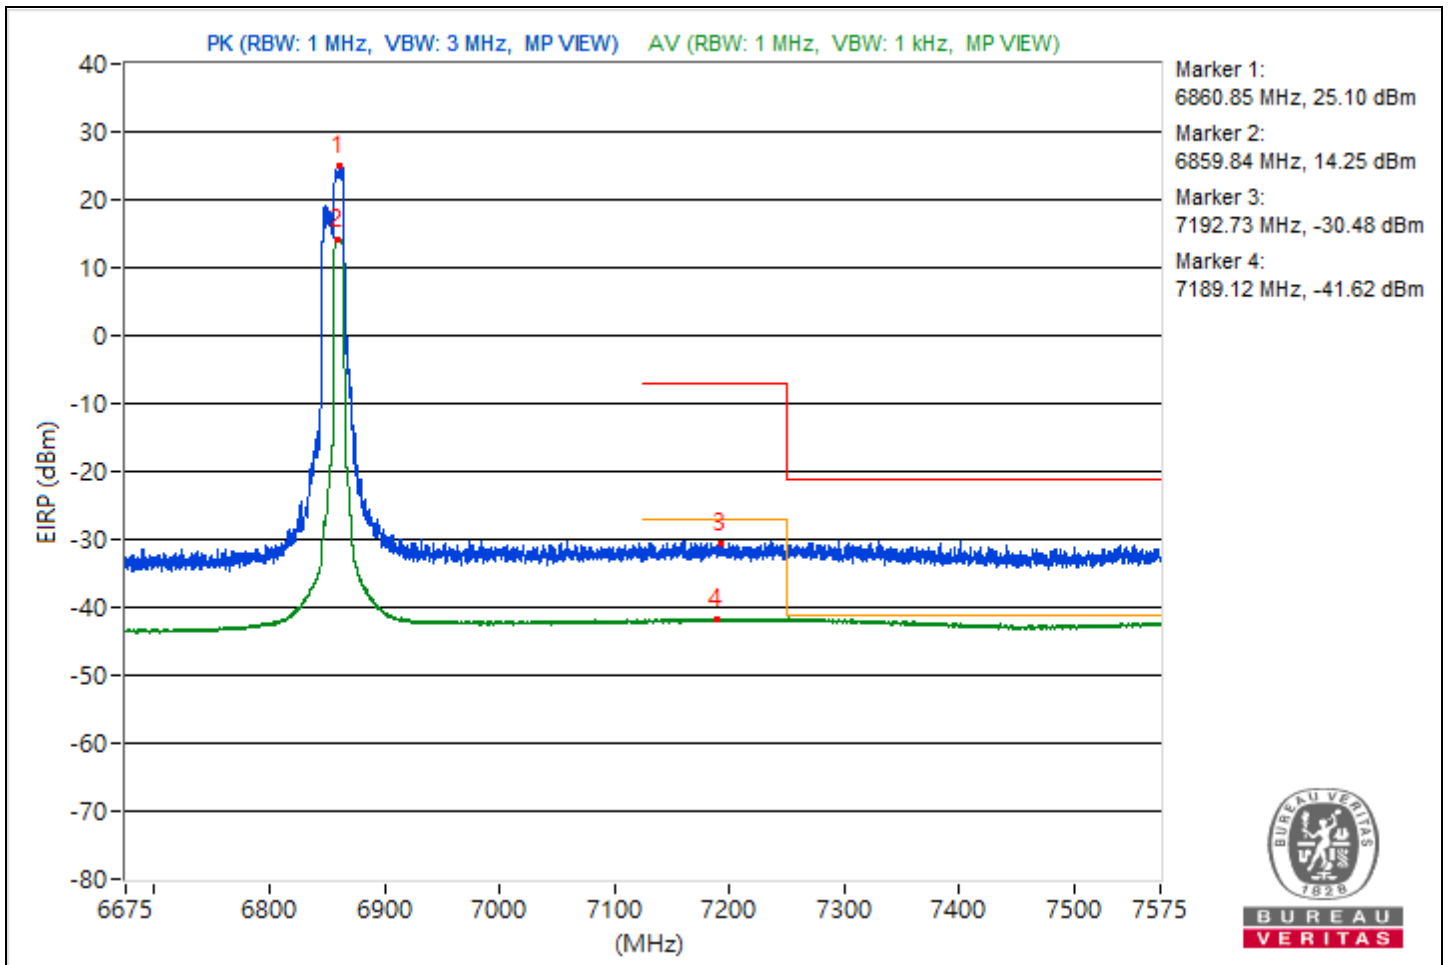


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.65	120.61 PK			17.52	17.64	4.76	25.35
2	*5951.07	108.98 AV			5.87	6.02	4.76	13.72
3	#5898.9	74.76 PK	88.26	-13.5	-28.81	-27.78	4.76	-20.5
4	#5851.57	63.69 AV	68.26	-4.57	-39.63	-39.07	4.76	-31.57

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

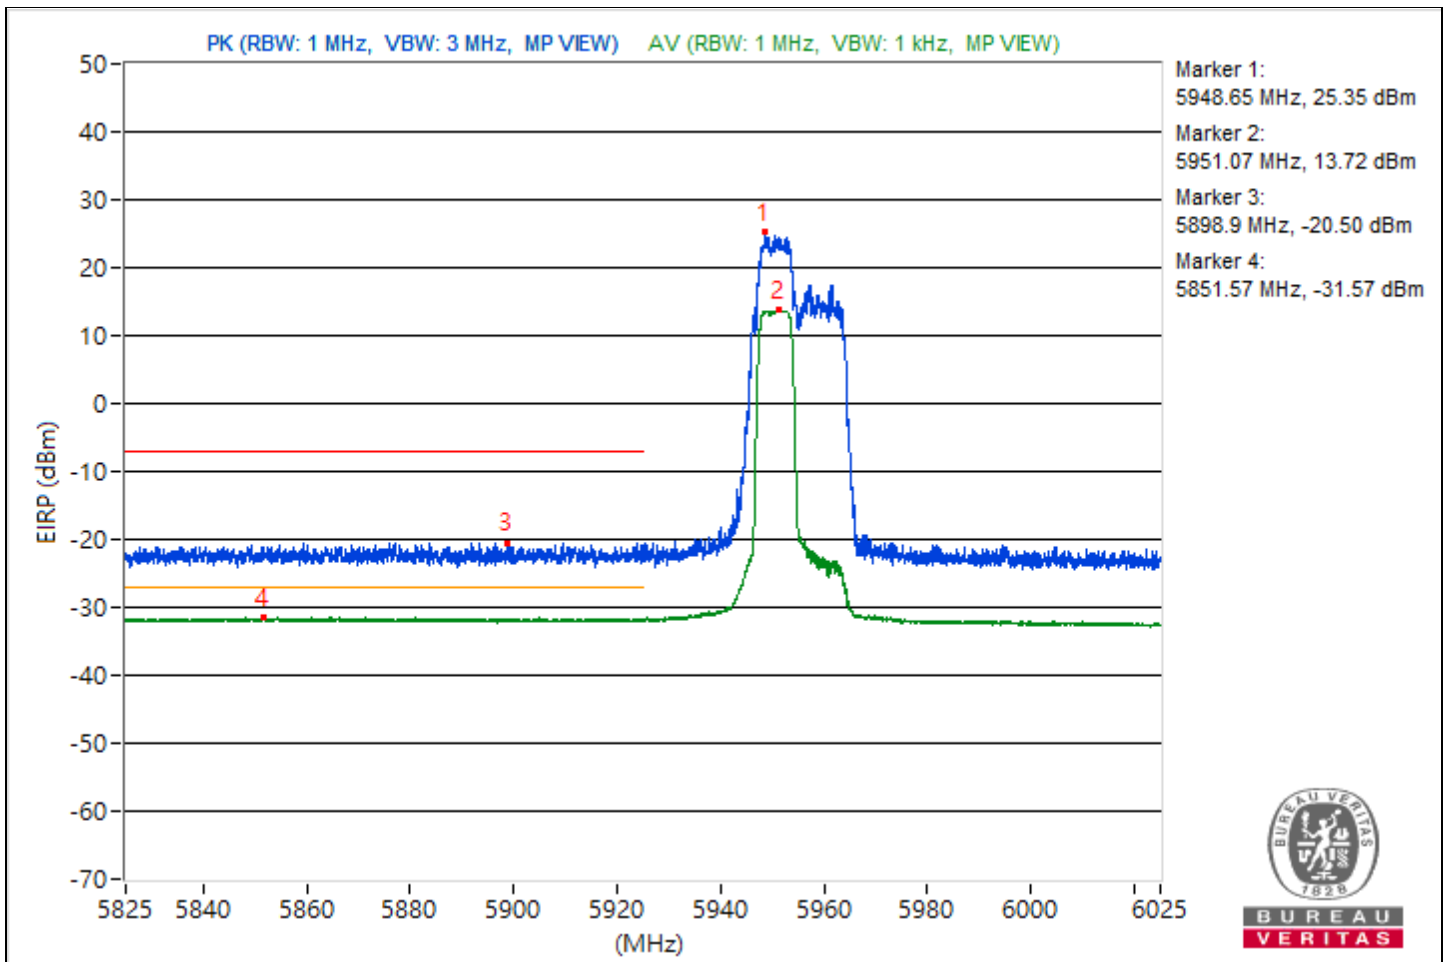


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6858.82	120.07 PK			18.27	15.76	4.61	24.81
2	*6858.37	109.39 AV			6.26	6.75	4.61	14.13
3	#7195.09	65.33 PK	88.26	-22.93	-36.01	-39.95	4.61	-29.93
4	#7210.95	53.67 AV	68.26	-14.59	-49.39	-49.03	4.61	-41.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

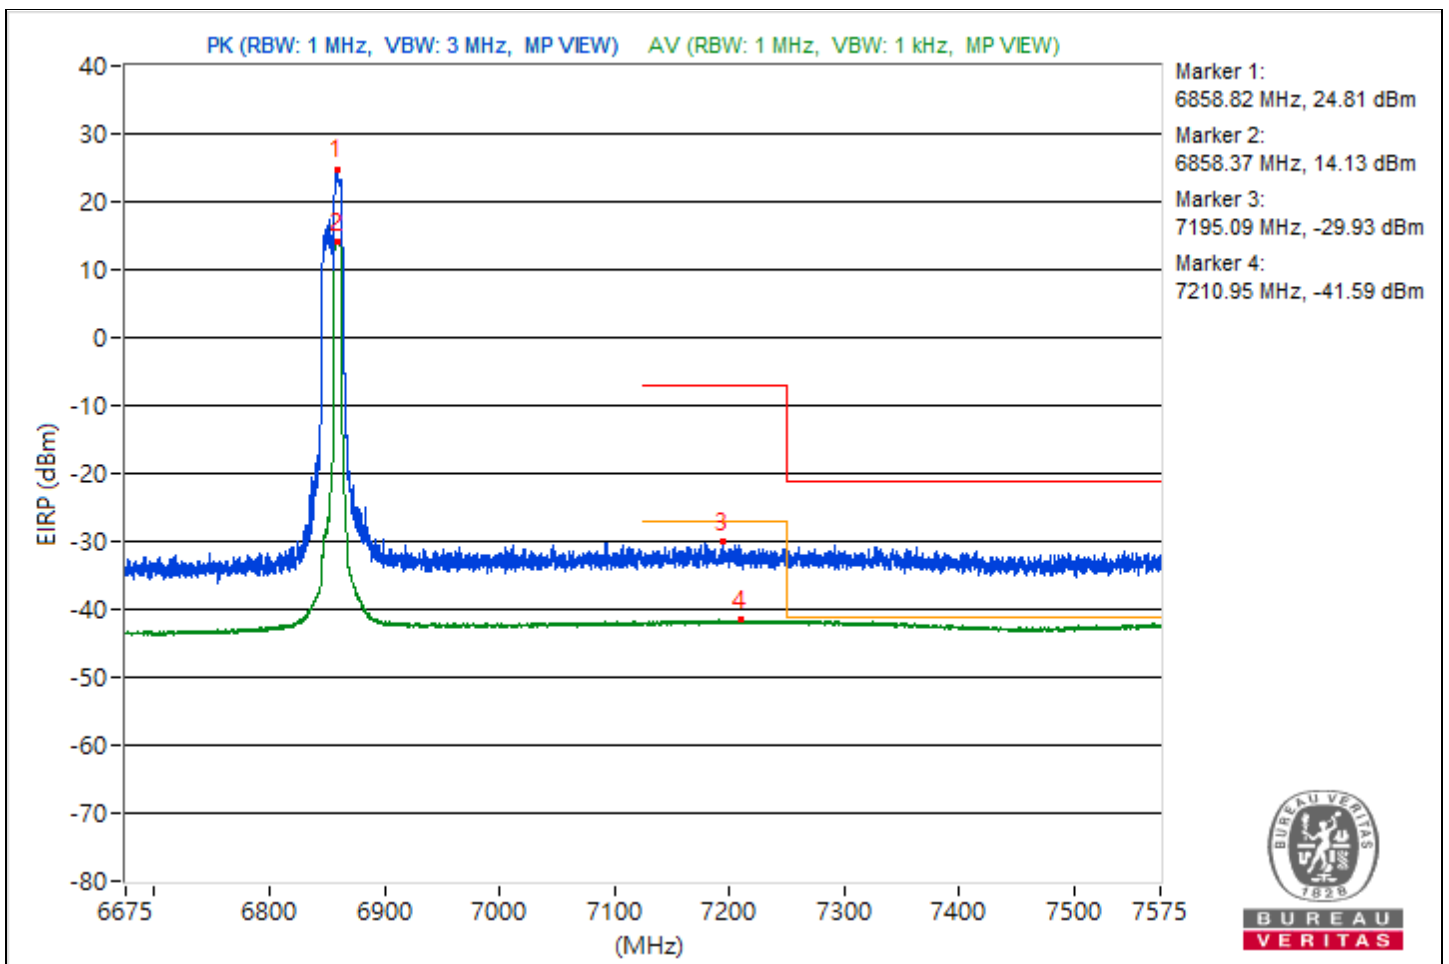


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5953.15	120.42 PK			18.25	16.33	4.76	25.16
2	*5953.9	109.72 AV			6.51	6.86	4.76	14.46
3	#5919.27	75.56 PK	88.26	-12.7	-25.9	-29.94	4.76	-19.7
4	#5923.95	63.94 AV	68.26	-4.32	-39.19	-38.99	4.76	-31.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

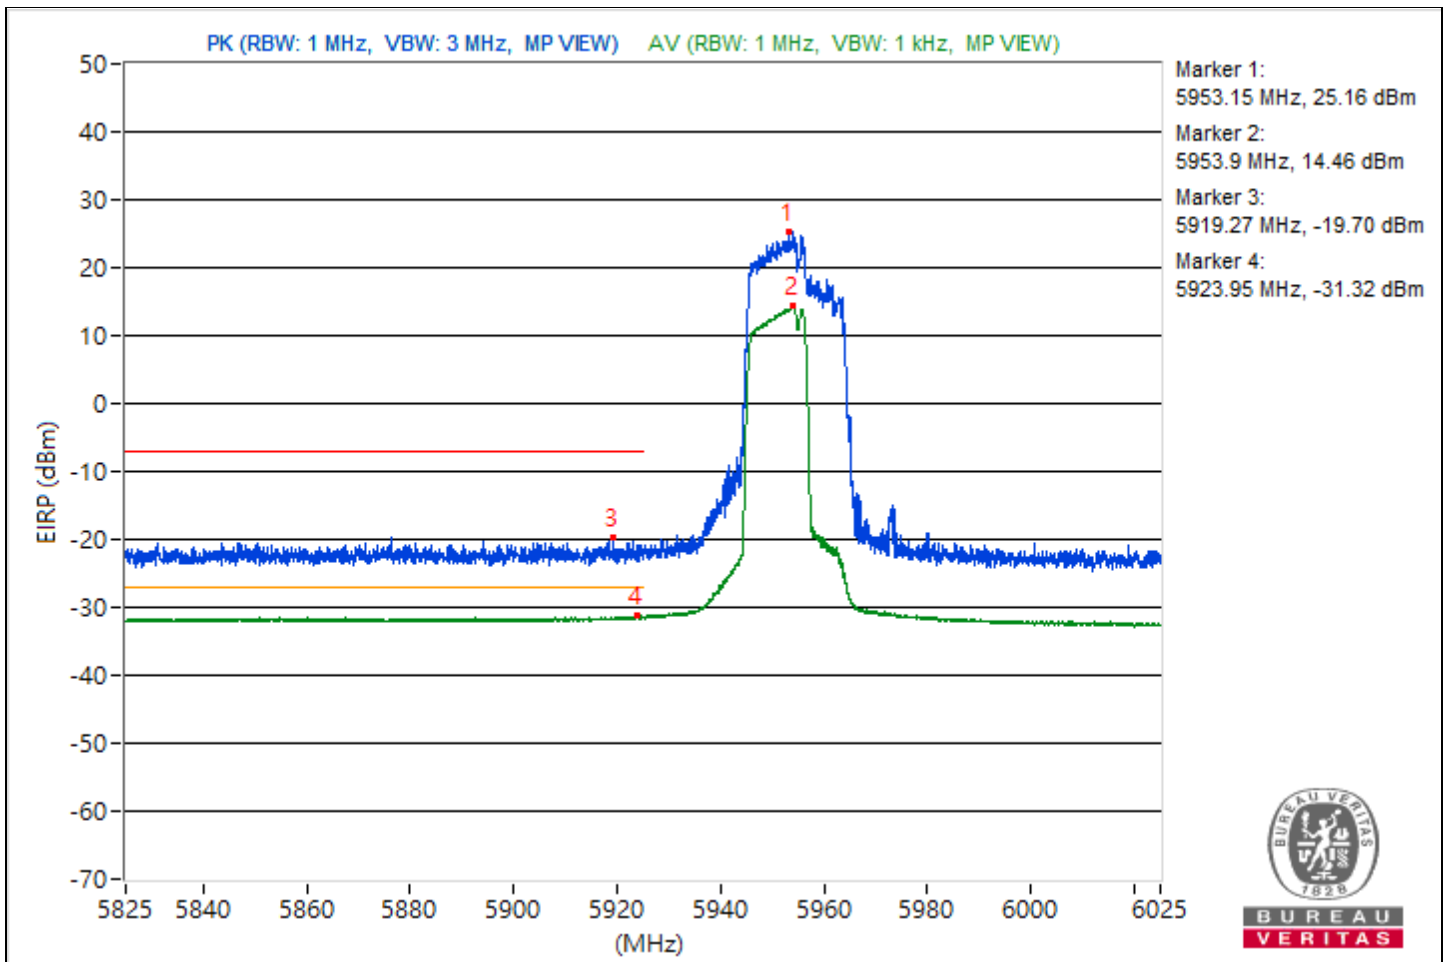


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6856.24	120.97 PK			18.79	17.25	4.61	25.71
2	*6856.24	110.04 AV			7.05	7.27	4.61	14.78
3	#7156.16	64.69 PK	88.26	-23.57	-38.71	-37.72	4.61	-30.57
4	#7182.82	53.65 AV	68.26	-14.61	-49.47	-49.01	4.61	-41.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

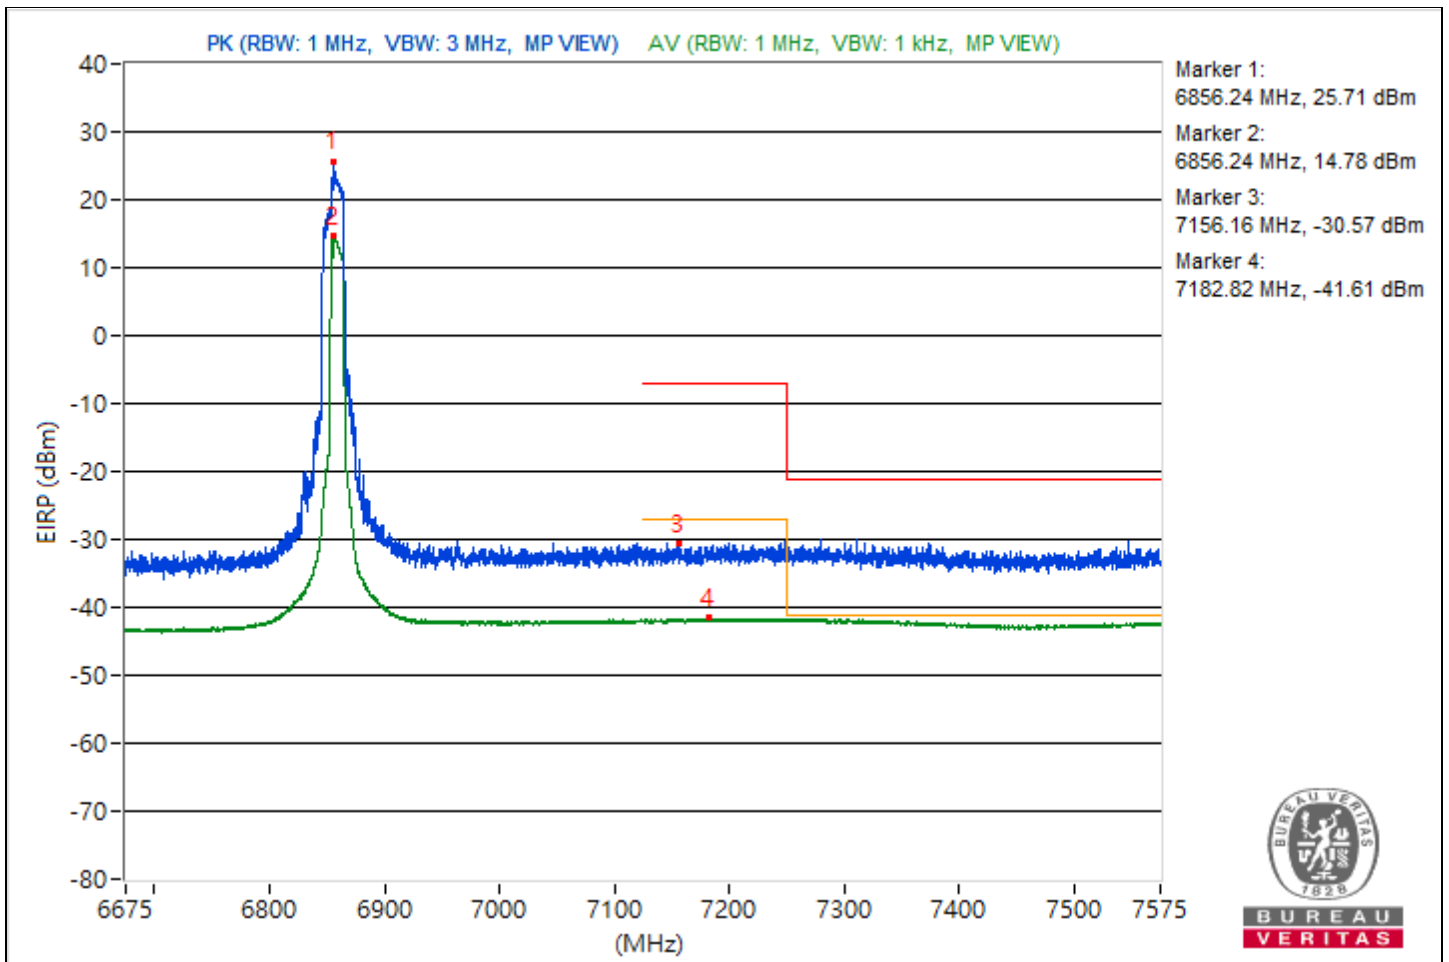


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.87	112.93 PK			6.95	11.64	4.76	17.67
2	*5982.82	102.09 AV			-0.78	-1.12	4.76	6.83
3	#5923.35	77.73 PK	88.26	-10.53	-25.12	-25.49	4.76	-17.53
4	#5924.37	66.06 AV	68.26	-2.2	-36.75	-37.21	4.76	-29.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

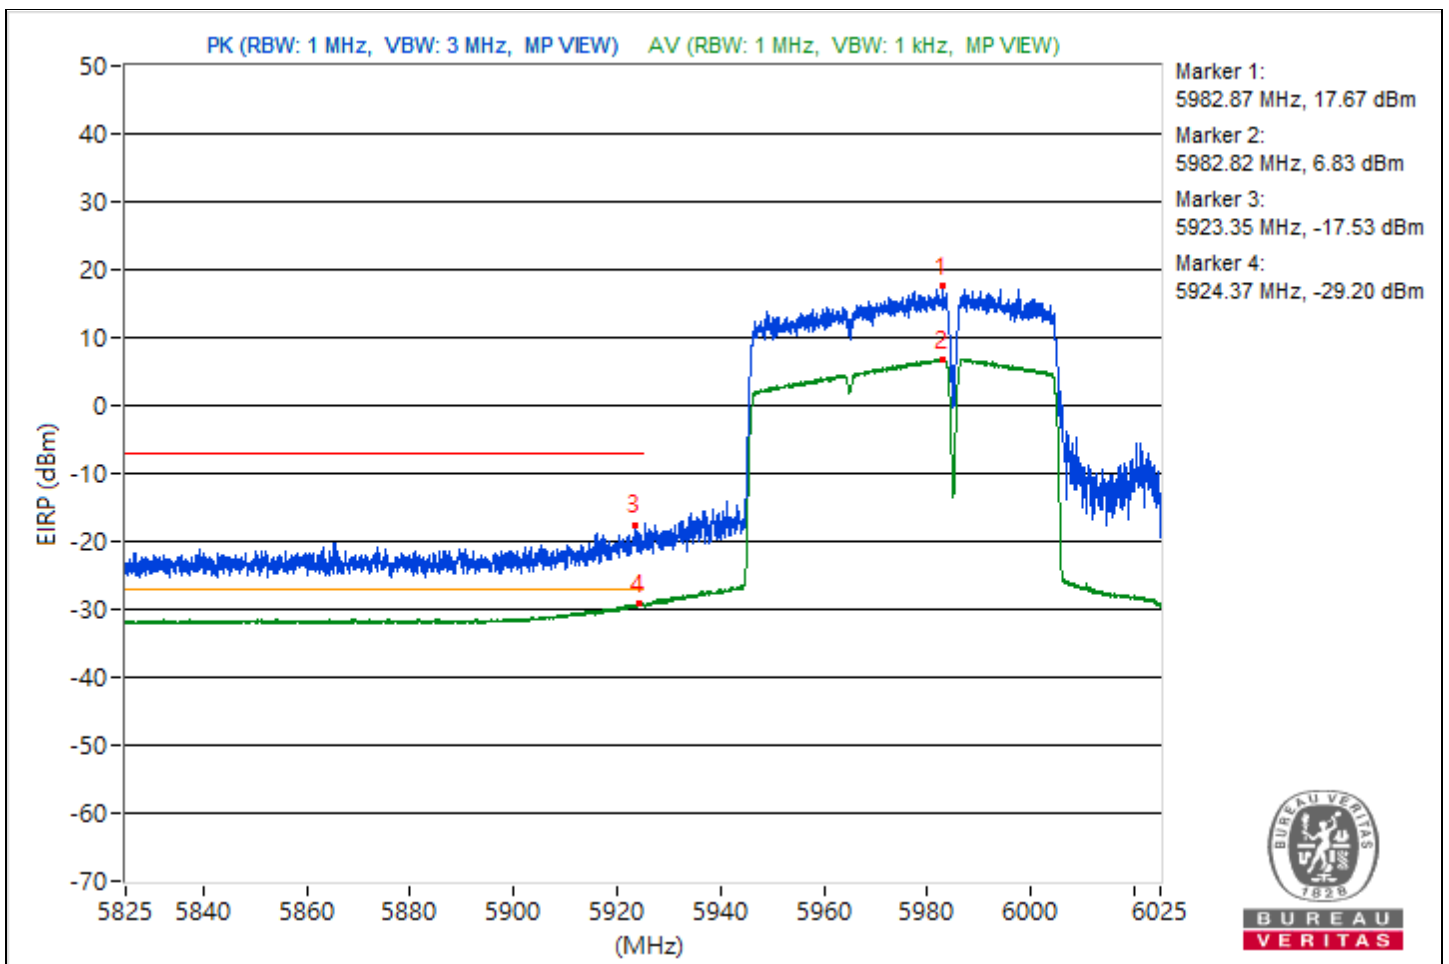


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6782.21	115.79 PK			10.42	14.48	4.61	20.53
2	*6783.34	105.27 AV			2.12	2.64	4.61	10.01
3	#7218.26	63.74 PK	88.26	-24.52	-37.59	-41.56	4.61	-31.52
4	#7154.81	53.62 AV	68.26	-14.64	-48.89	-49.67	4.61	-41.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

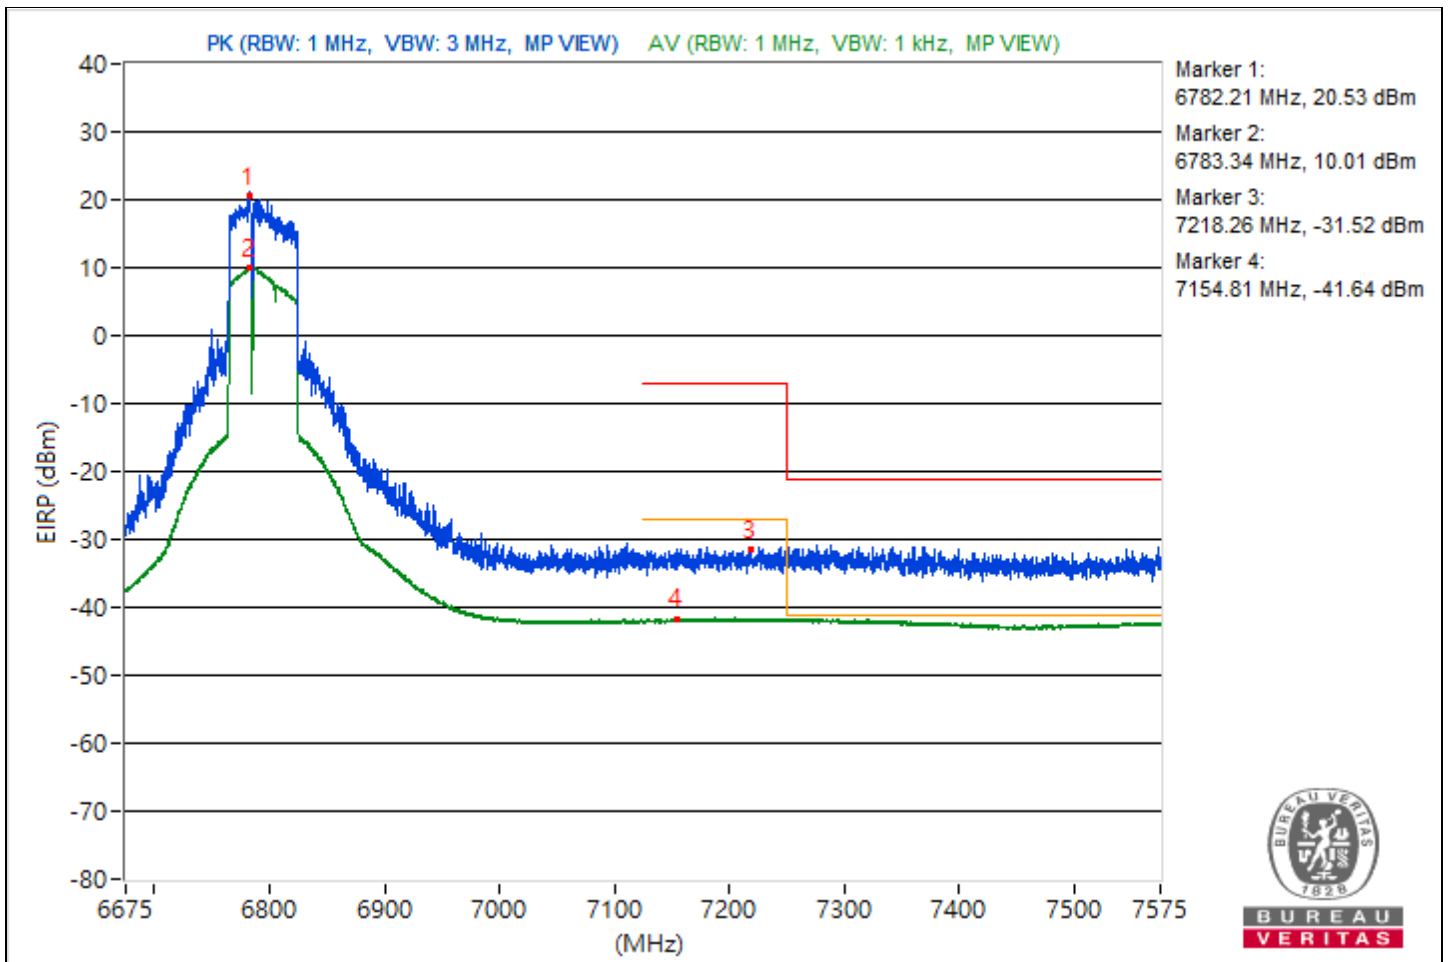


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6017.2	111.26 PK			6.35	9.54	4.76	16
2	*6023	98.85 AV			-4.4	-3.96	4.76	3.59
3	#5923.25	77.23 PK	88.26	-11.03	-28.18	-24.27	4.76	-18.03
4	#5923.73	65.73 AV	68.26	-2.53	-37.85	-36.81	4.76	-29.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

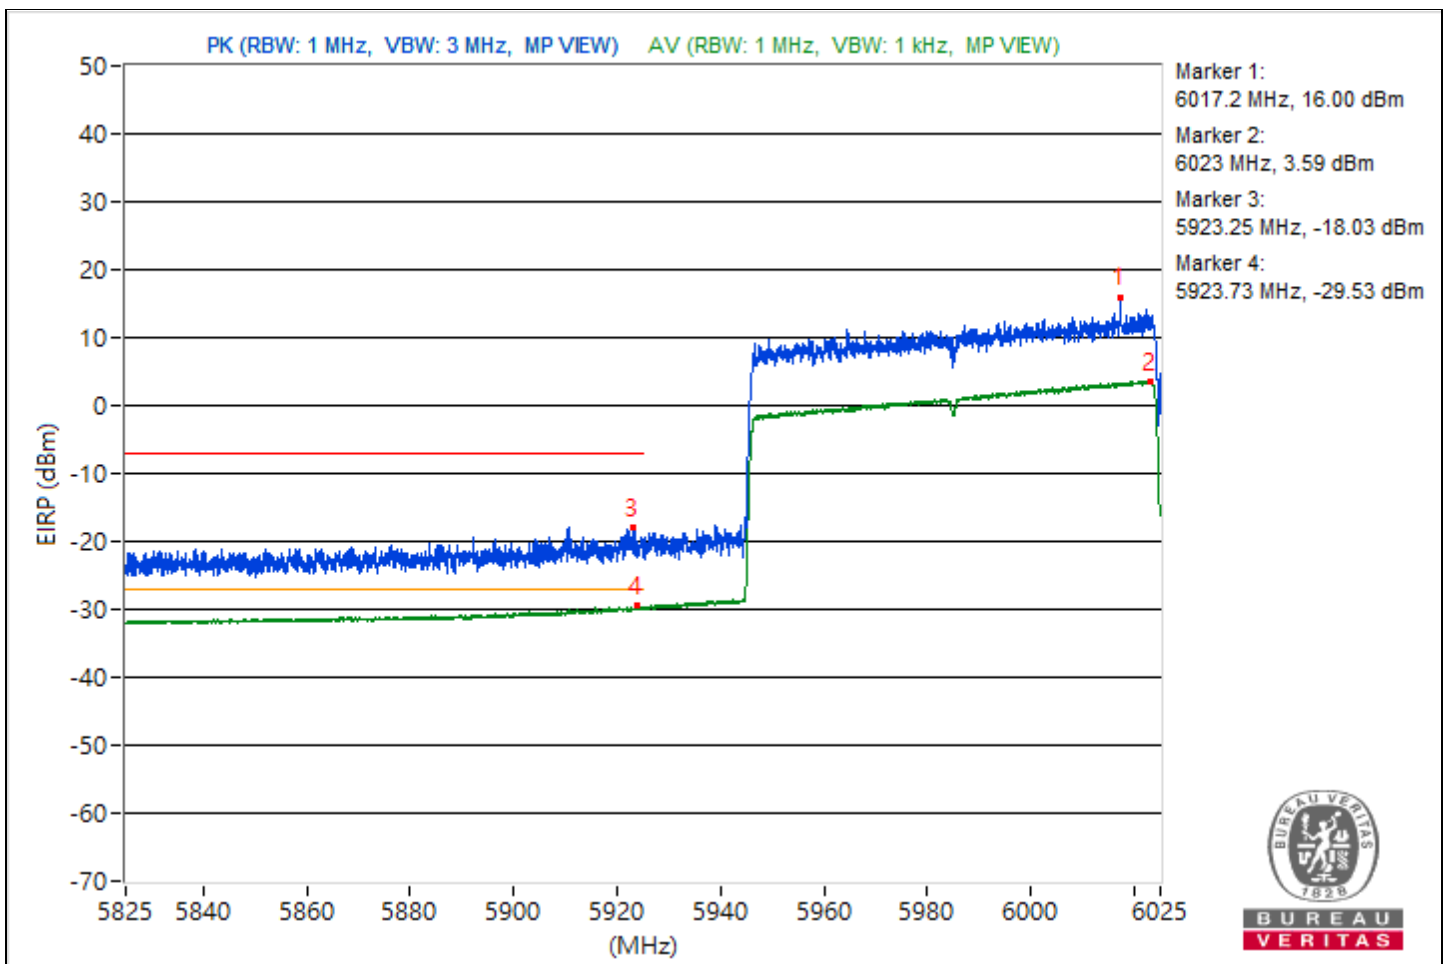


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6675.56	113.66 PK			8.51	12.26	4.61	18.4
2	*6675.11	101.89 AV			-0.75	-1.26	4.61	6.63
3	#7198.8	64.32 PK	88.26	-23.94	-37.38	-40.19	4.61	-30.94
4	#7221.64	53.67 AV	68.26	-14.59	-49.02	-49.41	4.61	-41.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

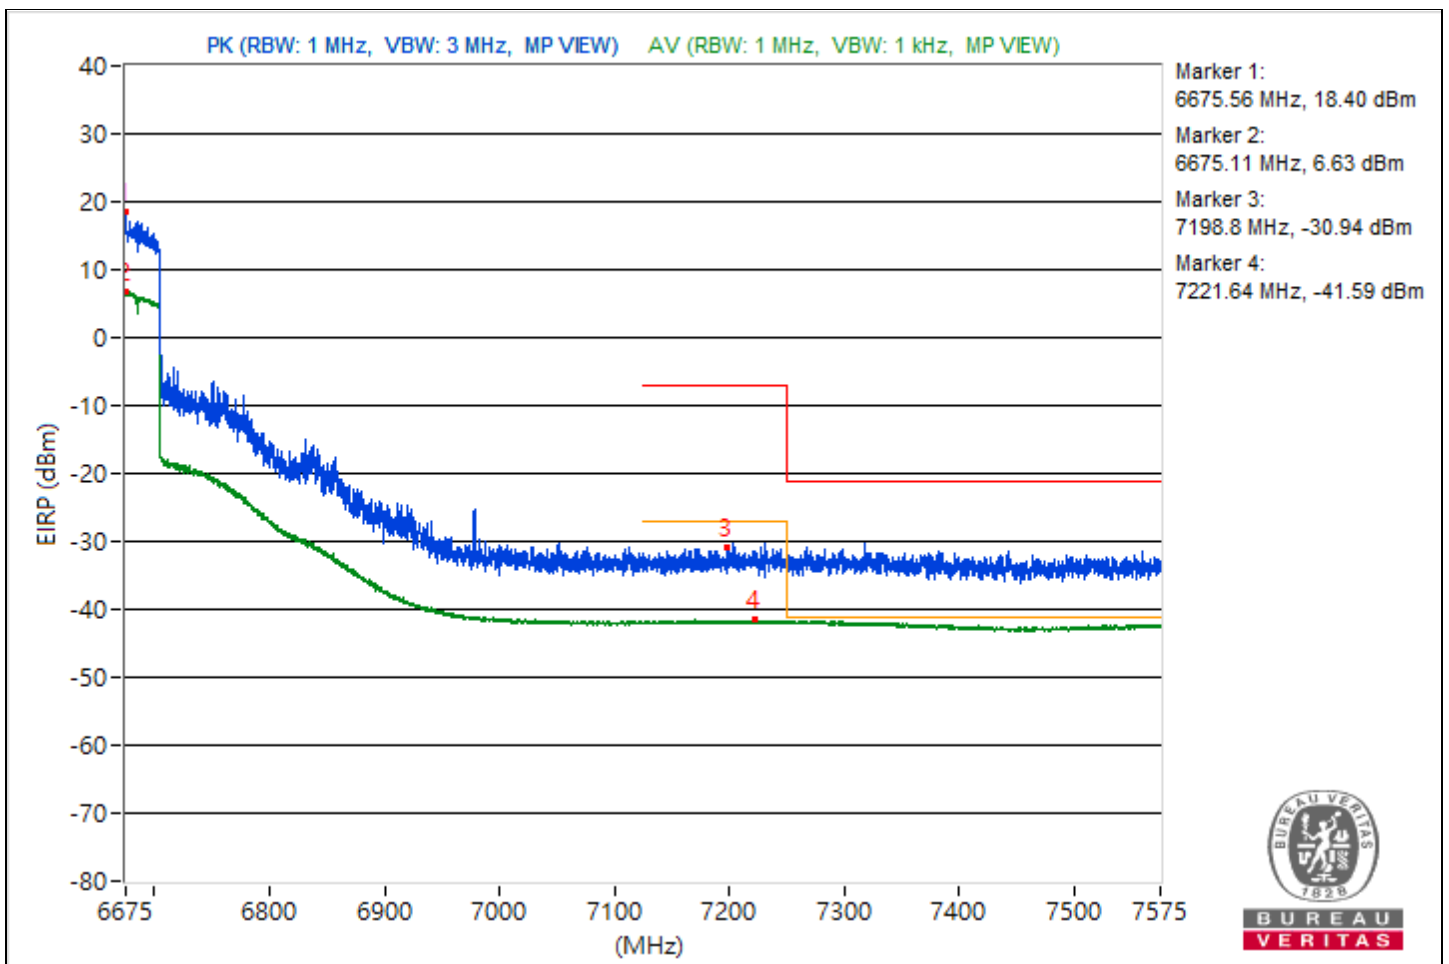


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6013.85	108.77 PK			4.19	6.88	4.76	13.51
2	*6022.25	98.79 AV			-3.74	-4.81	4.76	3.53
3	#5919.32	76.66 PK	88.26	-11.6	-25.42	-27.6	4.76	-18.6
4	#5923.4	65.6 AV	68.26	-2.66	-37.96	-36.96	4.76	-29.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

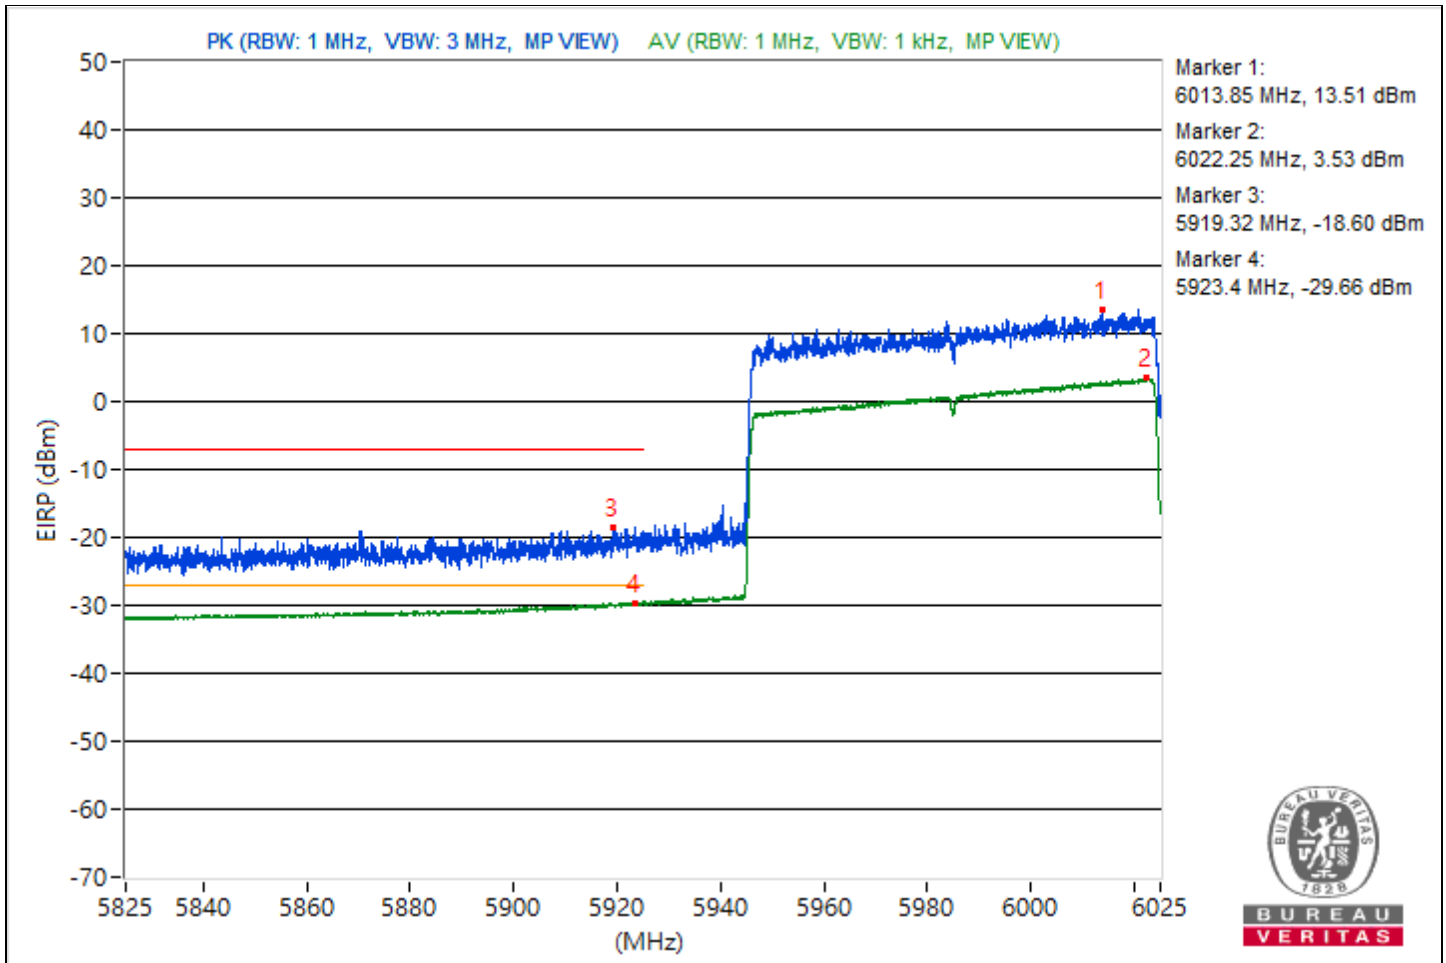


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	6.675 GHz ~ 7.575 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6680.85	112.21 PK			9.59	9.06	4.61	16.95
2	*6675.45	101.61 AV			-1.28	-1.27	4.61	6.35
3	#7219.61	64.63 PK	88.26	-23.63	-37.86	-38.67	4.61	-30.63
4	#7210.16	53.61 AV	68.26	-14.65	-49.13	-49.41	4.61	-41.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

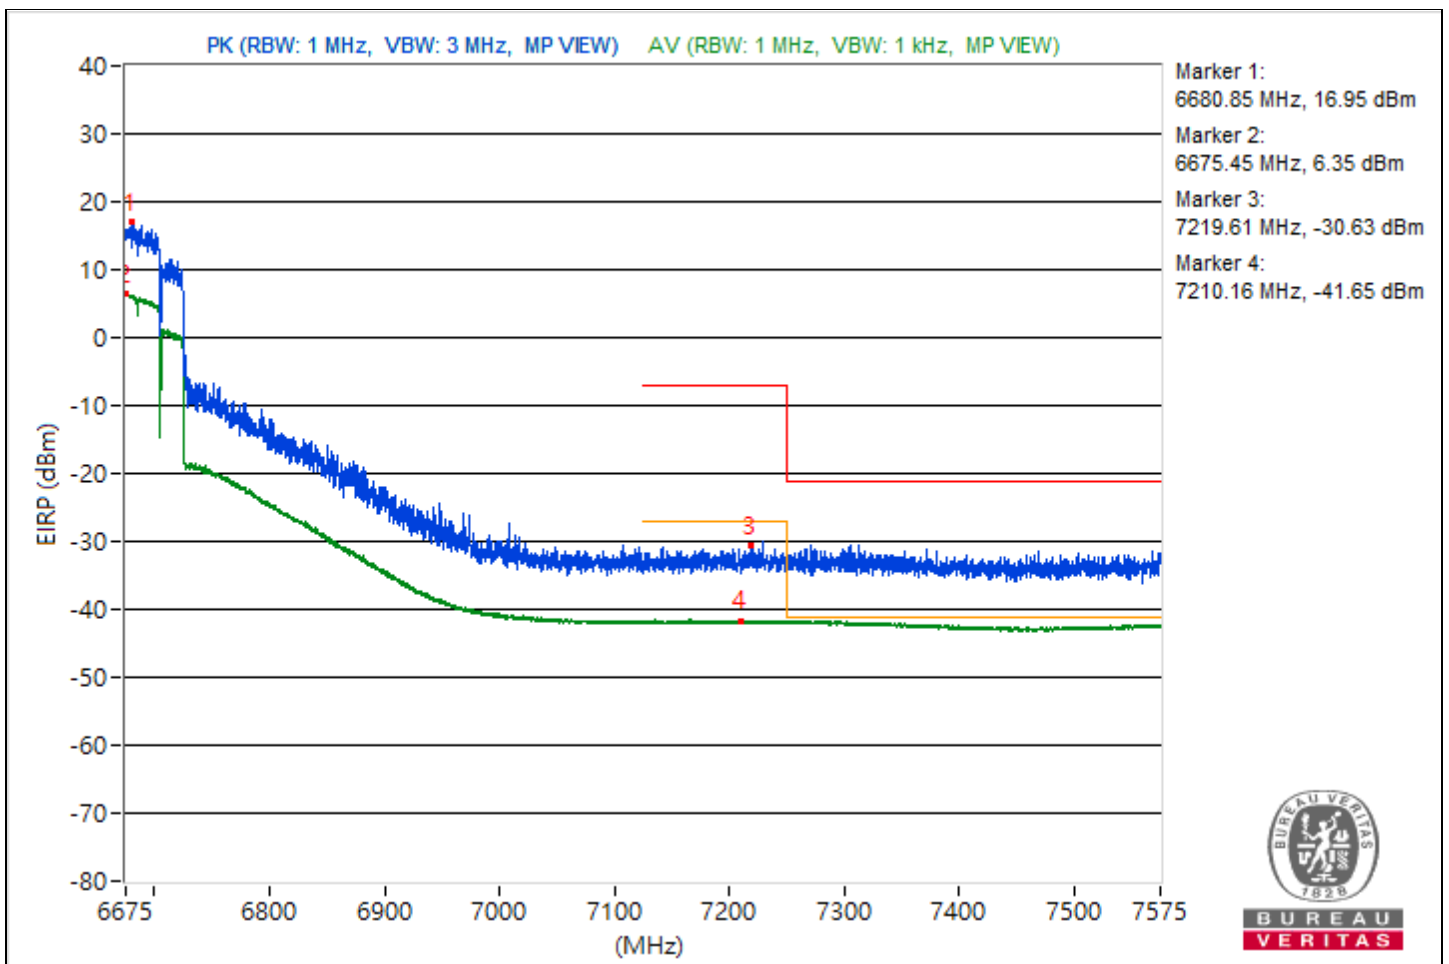

Mode B

under control of a low-power indoor AP


For 1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.8 PK	74.0	-24.2	2.93 H	75	33.9	15.9
2	11910.00	38.9 AV	54.0	-15.1	2.93 H	75	23.0	15.9
3	17865.00	54.0 PK	74.0	-20.0	1.42 H	239	26.7	27.3
4	17865.00	43.3 AV	54.0	-10.7	1.42 H	239	16.0	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

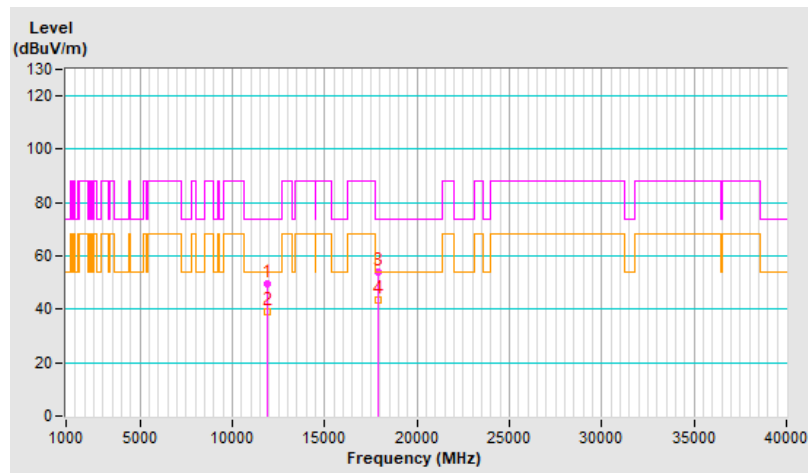


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.8 PK	74.0	-26.2	1.97 V	193	31.9	15.9
2	11910.00	38.5 AV	54.0	-15.5	1.97 V	193	22.6	15.9
3	17865.00	54.6 PK	74.0	-19.4	1.75 V	68	27.3	27.3
4	17865.00	41.2 AV	54.0	-12.8	1.75 V	68	13.9	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

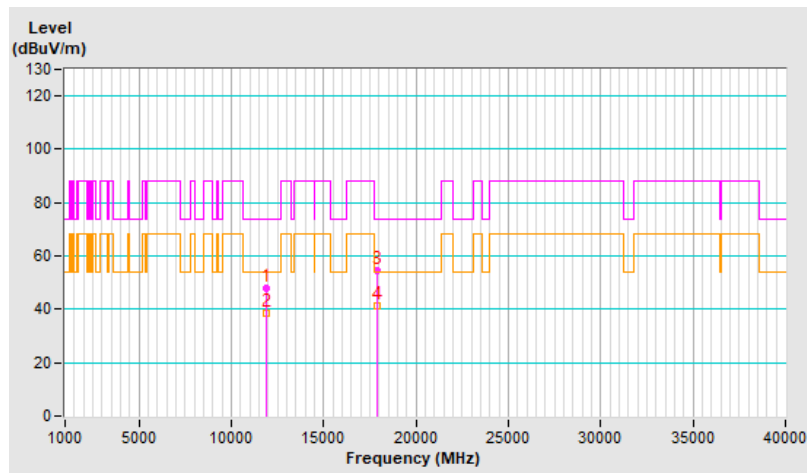


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.0 PK	74.0	-24.0	2.88 H	68	34.3	15.7
2	12350.00	39.2 AV	54.0	-14.8	2.88 H	68	23.5	15.7
3	18525.00	54.8 PK	74.0	-19.2	1.46 H	252	58.9	-4.1
4	18525.00	43.8 AV	54.0	-10.2	1.46 H	252	47.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

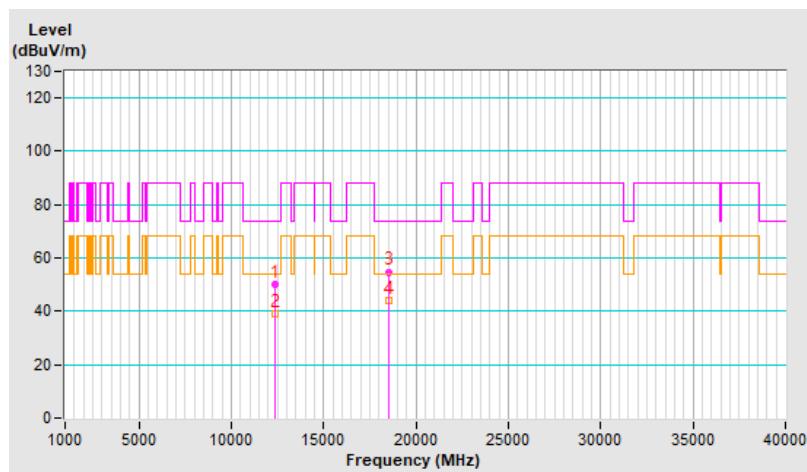


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	47.5 PK	74.0	-26.5	1.93 V	202	31.8	15.7
2	12350.00	38.2 AV	54.0	-15.8	1.93 V	202	22.5	15.7
3	18525.00	54.7 PK	74.0	-19.3	1.71 V	68	58.8	-4.1
4	18525.00	41.2 AV	54.0	-12.8	1.71 V	68	45.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

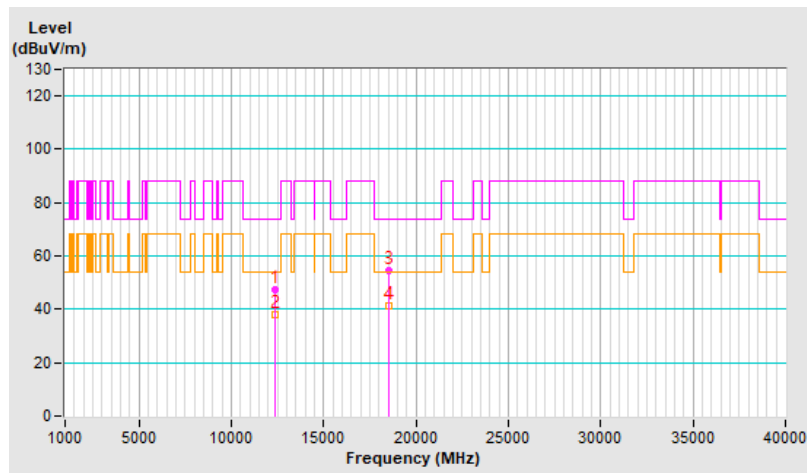


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.6 PK	88.2	-38.6	2.93 H	76	33.6	16.0
2	#12830.00	38.8 AV	68.2	-29.4	2.93 H	76	22.8	16.0
3	19245.00	54.8 PK	74.0	-19.2	1.48 H	239	57.9	-3.1
4	19245.00	43.9 AV	54.0	-10.1	1.48 H	239	47.0	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

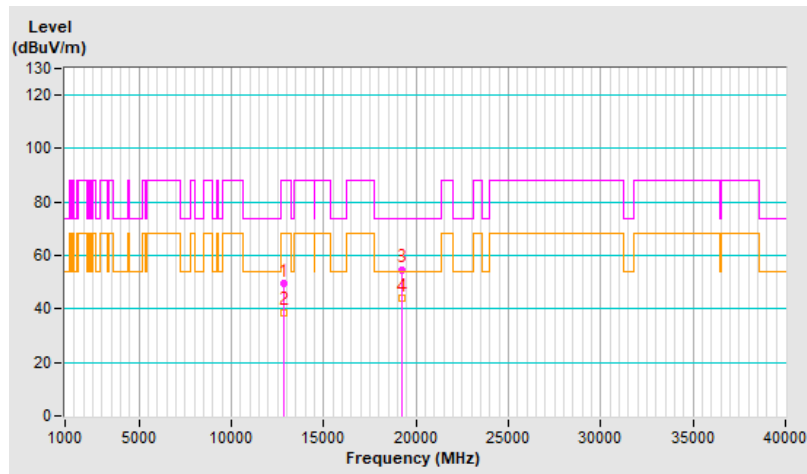


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.92 V	195	32.3	16.0
2	#12830.00	38.9 AV	68.2	-29.3	1.92 V	195	22.9	16.0
3	19245.00	54.2 PK	74.0	-19.8	1.78 V	82	57.3	-3.1
4	19245.00	40.8 AV	54.0	-13.2	1.78 V	82	43.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

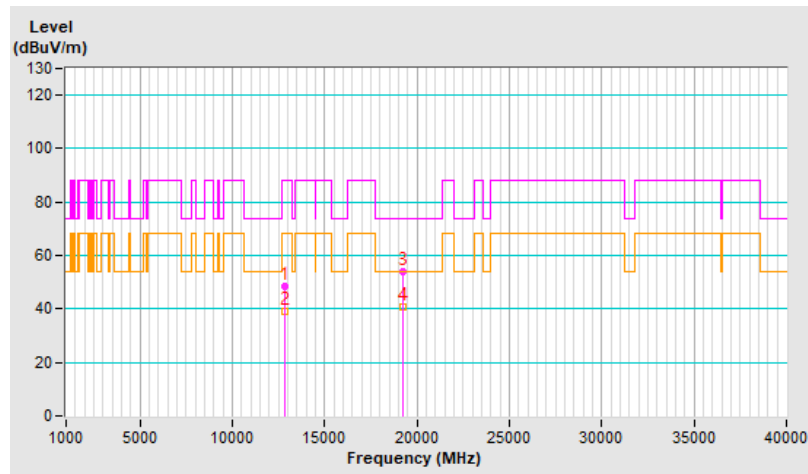


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	50.0 PK	88.2	-38.2	2.93 H	81	33.8	16.2
2	#12870.00	39.3 AV	68.2	-28.9	2.93 H	81	23.1	16.2
3	19305.00	54.4 PK	74.0	-19.6	1.44 H	244	57.4	-3.0
4	19305.00	43.8 AV	54.0	-10.2	1.44 H	244	46.8	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

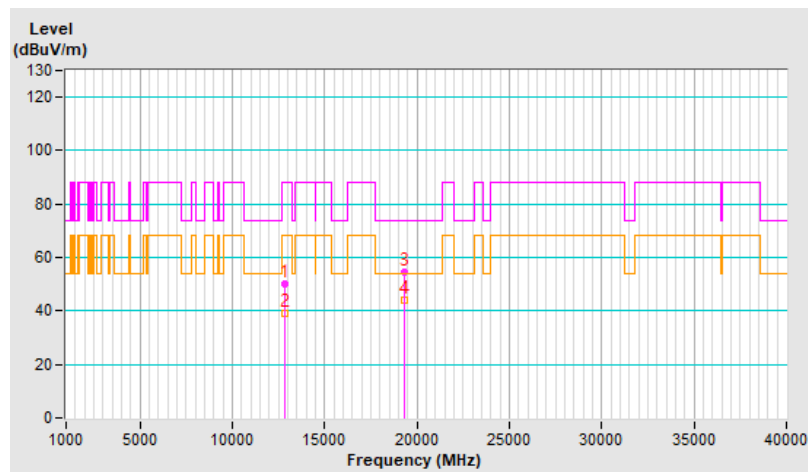


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.5 PK	88.2	-40.7	2.01 V	205	31.3	16.2
2	#12870.00	38.1 AV	68.2	-30.1	2.01 V	205	21.9	16.2
3	19305.00	54.4 PK	74.0	-19.6	1.76 V	66	57.4	-3.0
4	19305.00	40.9 AV	54.0	-13.1	1.76 V	66	43.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

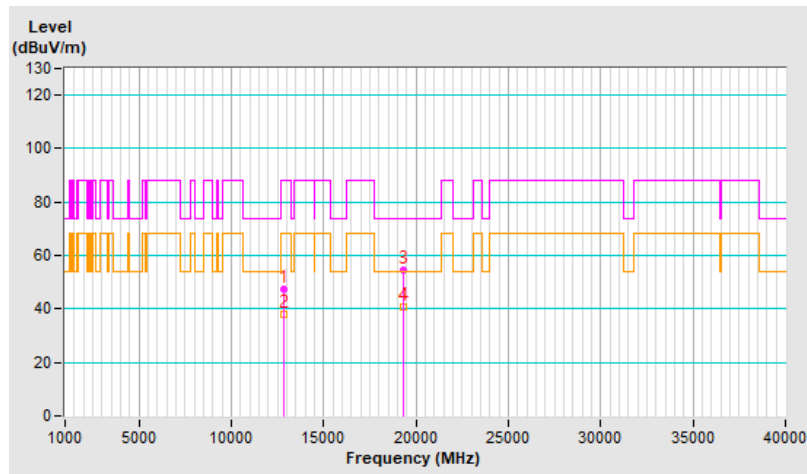


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	50.5 PK	88.2	-37.7	2.96 H	72	34.1	16.4
2	#12950.00	39.4 AV	68.2	-28.8	2.96 H	72	23.0	16.4
3	19425.00	54.1 PK	74.0	-19.9	1.37 H	237	57.7	-3.6
4	19425.00	43.6 AV	54.0	-10.4	1.37 H	237	47.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

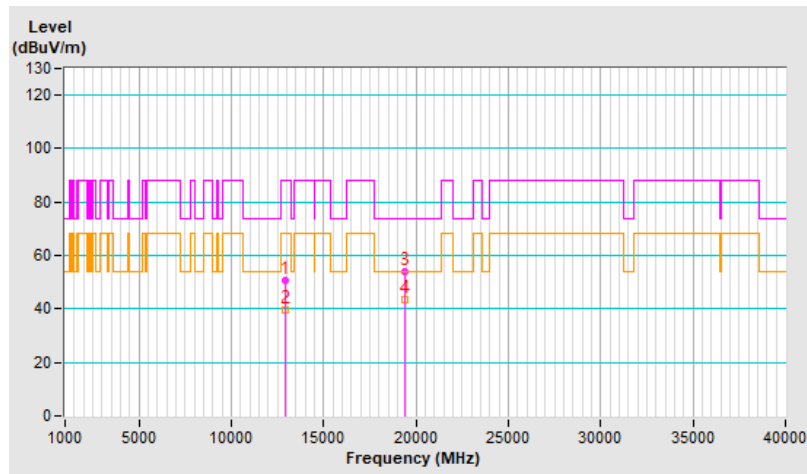


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.0 PK	88.2	-40.2	1.99 V	186	31.6	16.4
2	#12950.00	38.7 AV	68.2	-29.5	1.99 V	186	22.3	16.4
3	19425.00	54.3 PK	74.0	-19.7	1.80 V	75	57.9	-3.6
4	19425.00	40.8 AV	54.0	-13.2	1.80 V	75	44.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

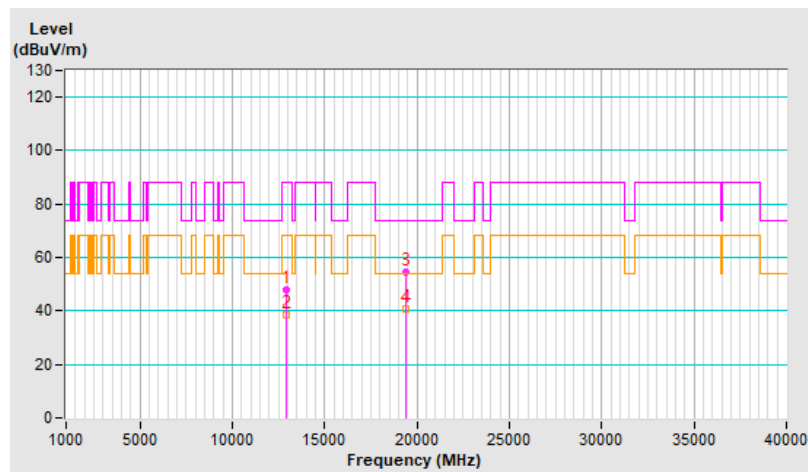


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	50.2 PK	88.2	-38.0	2.93 H	80	33.9	16.3
2	#13030.00	39.0 AV	68.2	-29.2	2.93 H	80	22.7	16.3
3	19545.00	54.0 PK	74.0	-20.0	1.40 H	250	57.9	-3.9
4	19545.00	43.2 AV	54.0	-10.8	1.40 H	250	47.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

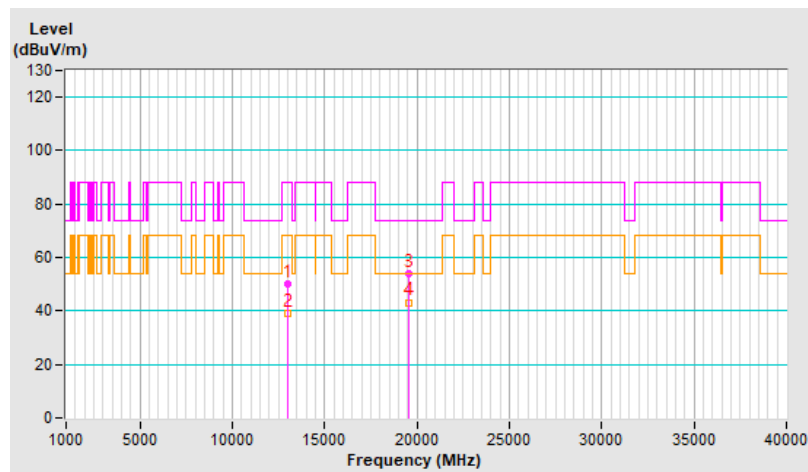


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.5 PK	88.2	-40.7	1.93 V	197	31.2	16.3
2	#13030.00	38.1 AV	68.2	-30.1	1.93 V	197	21.8	16.3
3	19545.00	54.0 PK	74.0	-20.0	1.77 V	60	57.9	-3.9
4	19545.00	40.7 AV	54.0	-13.3	1.77 V	60	44.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

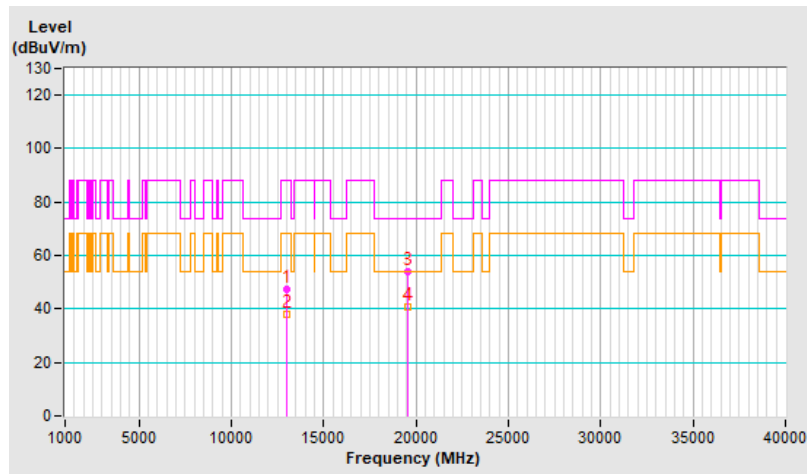


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.0 PK	88.2	-38.2	2.90 H	90	33.7	16.3
2	#13070.00	39.2 AV	68.2	-29.0	2.90 H	90	22.9	16.3
3	19605.00	54.8 PK	74.0	-19.2	1.43 H	252	58.8	-4.0
4	19605.00	43.9 AV	54.0	-10.1	1.43 H	252	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

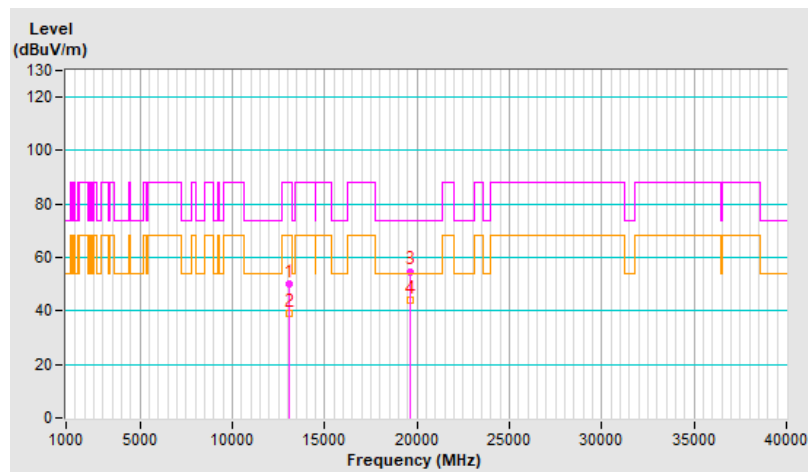


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	1.92 V	185	31.2	16.3
2	#13070.00	38.5 AV	68.2	-29.7	1.92 V	185	22.2	16.3
3	19605.00	55.3 PK	74.0	-18.7	1.79 V	57	59.3	-4.0
4	19605.00	41.7 AV	54.0	-12.3	1.79 V	57	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

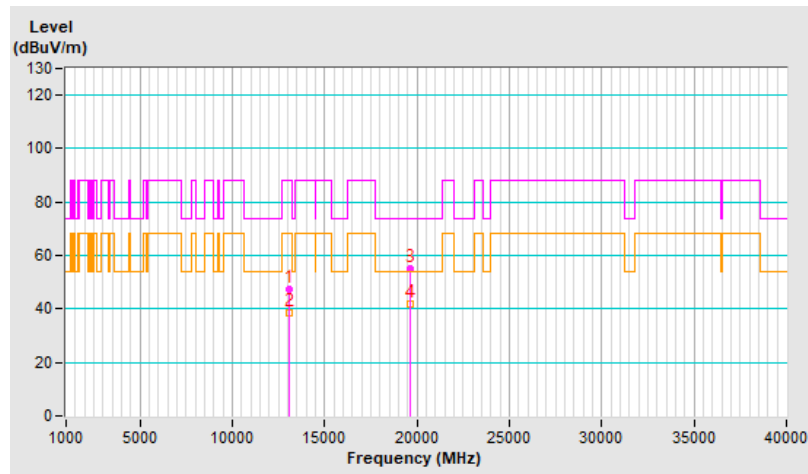


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.4 PK	74.0	-24.6	2.99 H	88	31.5	17.9
2	13390.00	38.6 AV	54.0	-15.4	2.99 H	88	20.7	17.9
3	20085.00	54.0 PK	74.0	-20.0	1.40 H	256	57.0	-3.0
4	20085.00	43.4 AV	54.0	-10.6	1.40 H	256	46.4	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

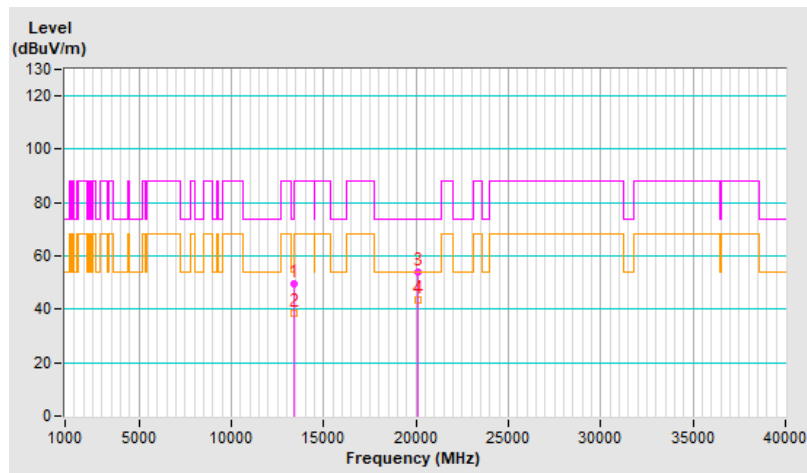


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.1 PK	74.0	-25.9	2.03 V	186	30.2	17.9
2	13390.00	38.6 AV	54.0	-15.4	2.03 V	186	20.7	17.9
3	20085.00	54.2 PK	74.0	-19.8	1.74 V	65	57.2	-3.0
4	20085.00	41.1 AV	54.0	-12.9	1.74 V	65	44.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

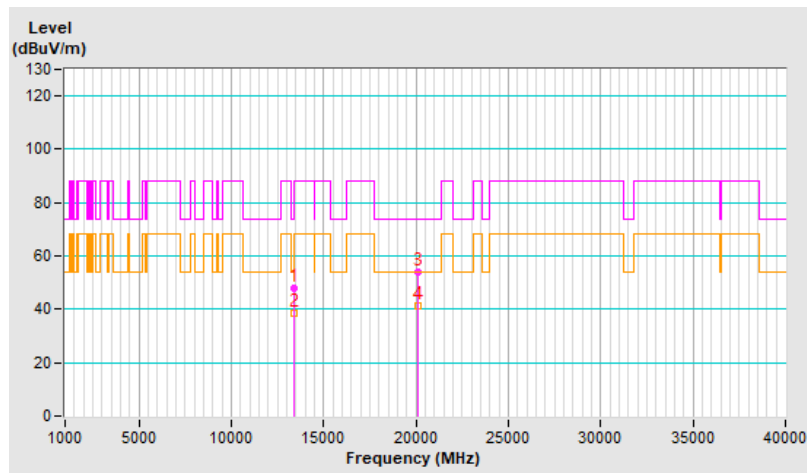


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.5 PK	88.2	-37.7	2.91 H	69	31.6	18.9
2	#13710.00	39.3 AV	68.2	-28.9	2.91 H	69	20.4	18.9
3	20565.00	54.1 PK	74.0	-19.9	1.41 H	235	56.9	-2.8
4	20565.00	43.3 AV	54.0	-10.7	1.41 H	235	46.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

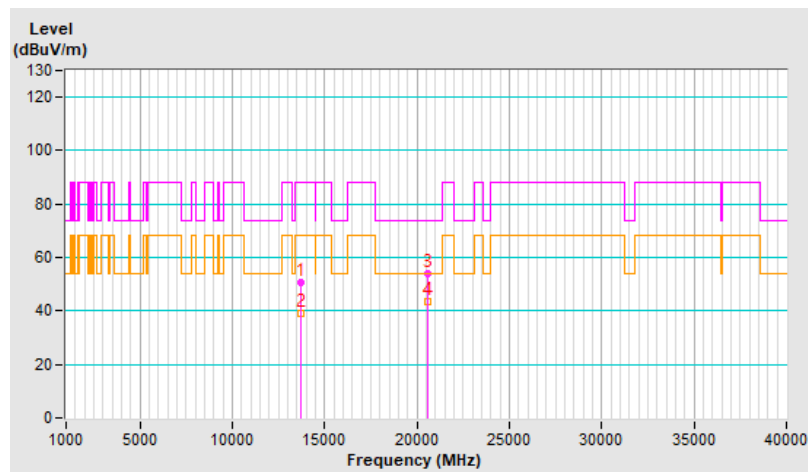


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.0 PK	88.2	-40.2	1.98 V	178	29.1	18.9
2	#13710.00	38.6 AV	68.2	-29.6	1.98 V	178	19.7	18.9
3	20565.00	54.4 PK	74.0	-19.6	1.75 V	62	57.2	-2.8
4	20565.00	40.9 AV	54.0	-13.1	1.75 V	62	43.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

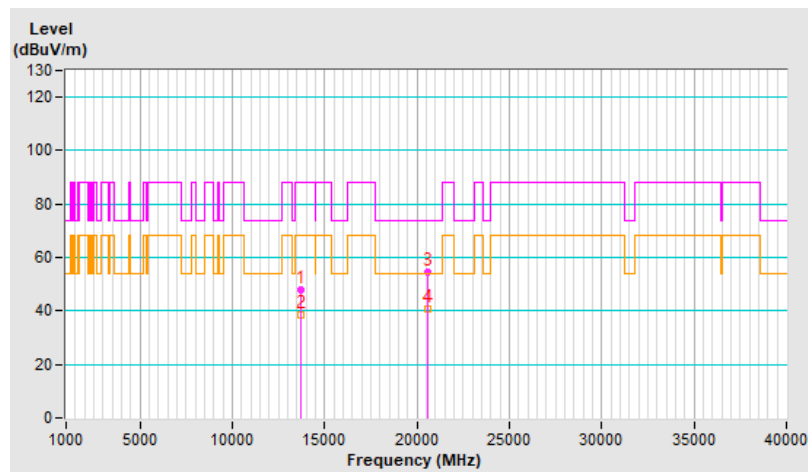


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	50.1 PK	88.2	-38.1	2.89 H	95	31.2	18.9
2	#13750.00	39.3 AV	68.2	-28.9	2.89 H	95	20.4	18.9
3	20625.00	54.4 PK	74.0	-19.6	1.47 H	246	57.3	-2.9
4	20625.00	43.4 AV	54.0	-10.6	1.47 H	246	46.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

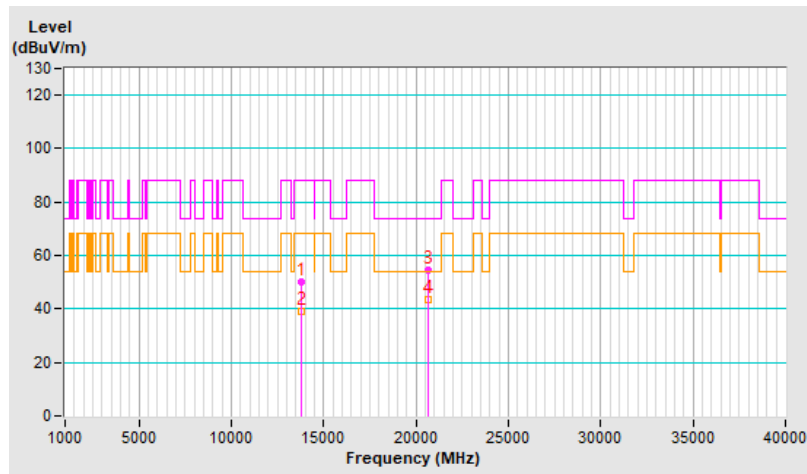


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.02 V	201	29.4	18.9
2	#13750.00	38.9 AV	68.2	-29.3	2.02 V	201	20.0	18.9
3	20625.00	55.0 PK	74.0	-19.0	1.74 V	62	57.9	-2.9
4	20625.00	41.6 AV	54.0	-12.4	1.74 V	62	44.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

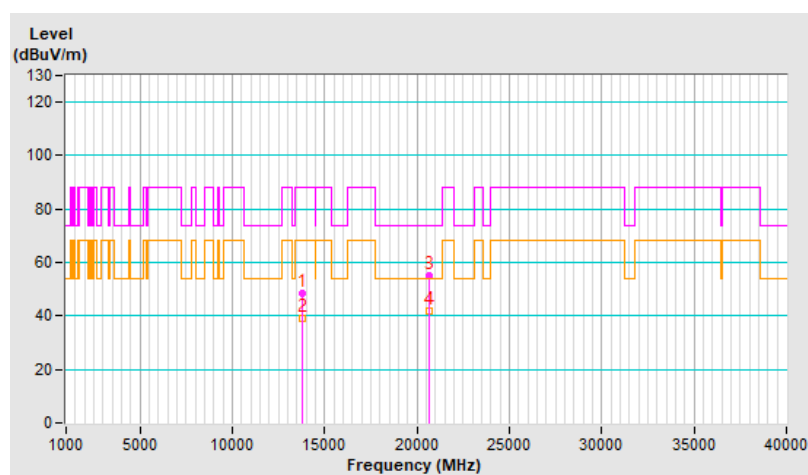


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.9 PK	88.2	-38.3	2.87 H	103	31.0	18.9
2	#13990.00	39.1 AV	68.2	-29.1	2.87 H	103	20.2	18.9
3	20985.00	54.7 PK	74.0	-19.3	1.50 H	262	56.7	-2.0
4	20985.00	43.7 AV	54.0	-10.3	1.50 H	262	45.7	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

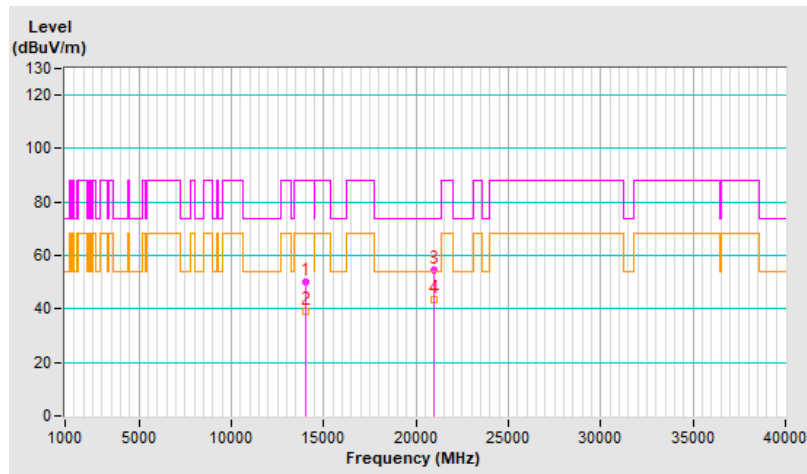


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.8 PK	88.2	-40.4	1.99 V	195	28.9	18.9
2	#13990.00	38.5 AV	68.2	-29.7	1.99 V	195	19.6	18.9
3	20985.00	54.4 PK	74.0	-19.6	1.75 V	63	56.4	-2.0
4	20985.00	41.1 AV	54.0	-12.9	1.75 V	63	43.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

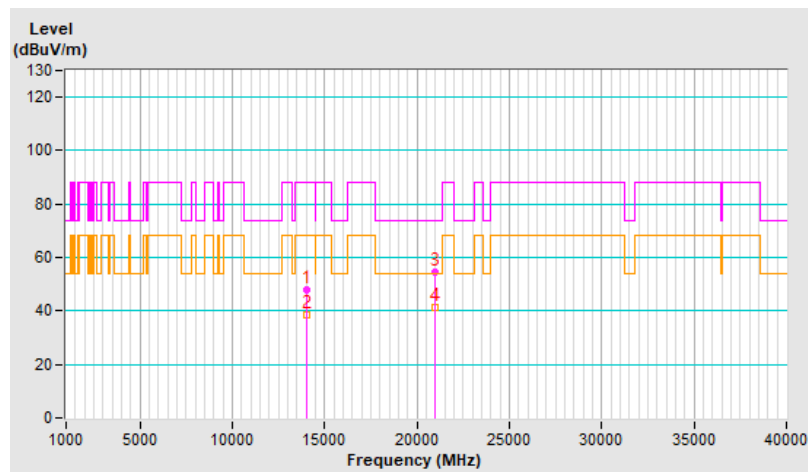


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	50.4 PK	88.2	-37.8	2.85 H	103	30.8	19.6
2	#14230.00	39.4 AV	68.2	-28.8	2.85 H	103	19.8	19.6
3	21345.00	54.1 PK	74.0	-19.9	1.52 H	253	55.8	-1.7
4	21345.00	43.3 AV	54.0	-10.7	1.52 H	253	45.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

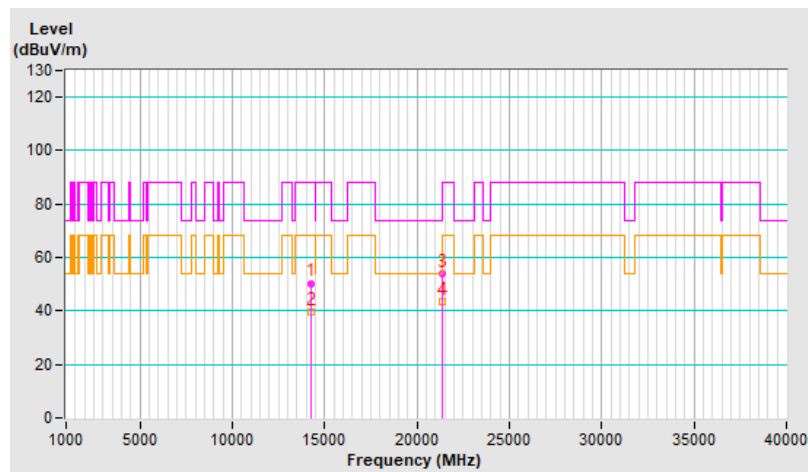


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.7 PK	88.2	-40.5	1.93 V	207	28.1	19.6
2	#14230.00	38.4 AV	68.2	-29.8	1.93 V	207	18.8	19.6
3	21345.00	55.0 PK	74.0	-19.0	1.71 V	66	56.7	-1.7
4	21345.00	41.5 AV	54.0	-12.5	1.71 V	66	43.2	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

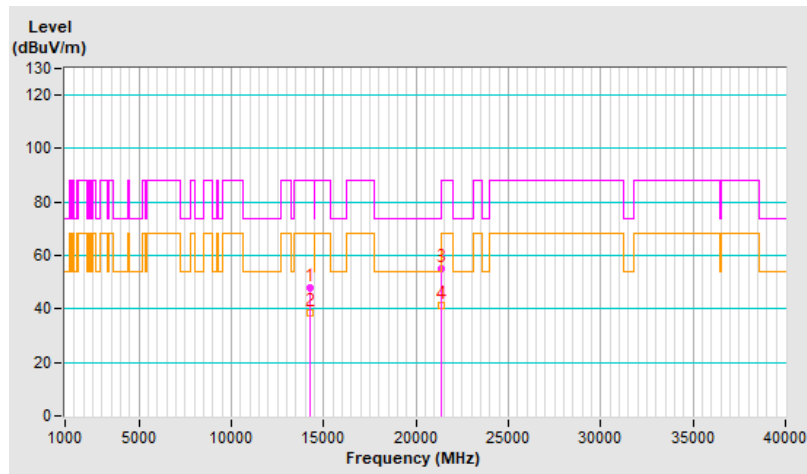

For 1S1T


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.5 PK	74.0	-23.5	2.83 H	106	34.6	15.9
2	11910.00	39.6 AV	54.0	-14.4	2.83 H	106	23.7	15.9
3	17865.00	54.9 PK	74.0	-19.1	1.42 H	239	27.6	27.3
4	17865.00	43.8 AV	54.0	-10.2	1.42 H	239	16.5	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

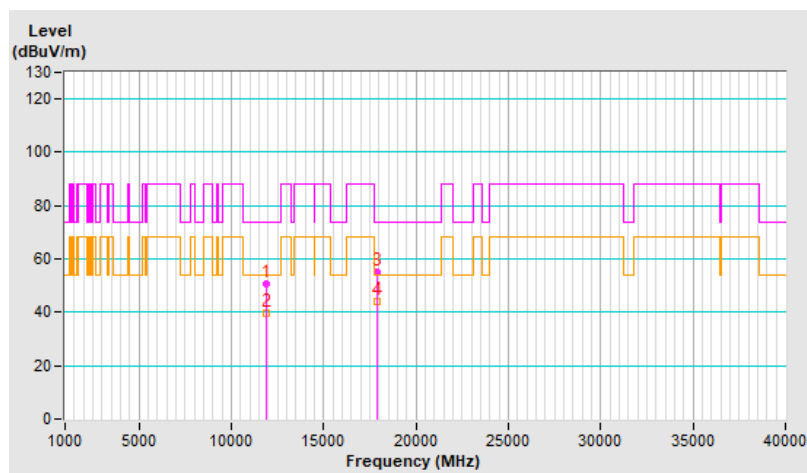


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.6 PK	74.0	-26.4	1.92 V	199	31.7	15.9
2	11910.00	38.2 AV	54.0	-15.8	1.92 V	199	22.3	15.9
3	17865.00	55.1 PK	74.0	-18.9	1.80 V	72	27.8	27.3
4	17865.00	41.7 AV	54.0	-12.3	1.80 V	72	14.4	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

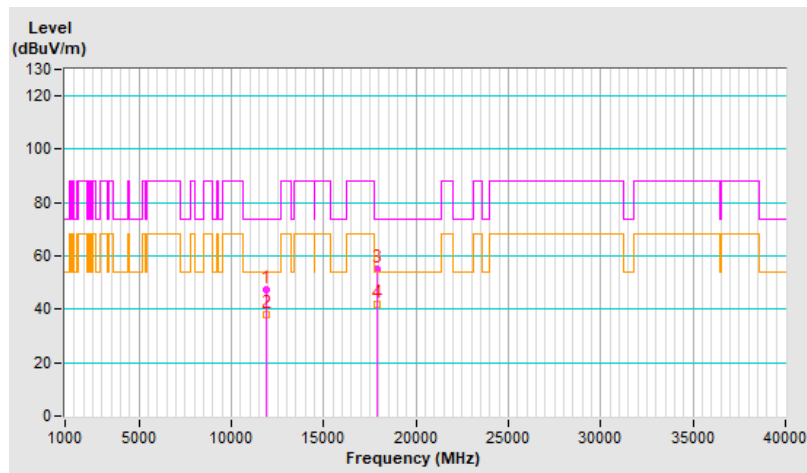


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	49.7 PK	74.0	-24.3	2.84 H	97	34.0	15.7
2	12350.00	38.8 AV	54.0	-15.2	2.84 H	97	23.1	15.7
3	18525.00	54.2 PK	74.0	-19.8	1.44 H	232	58.3	-4.1
4	18525.00	43.0 AV	54.0	-11.0	1.44 H	232	47.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

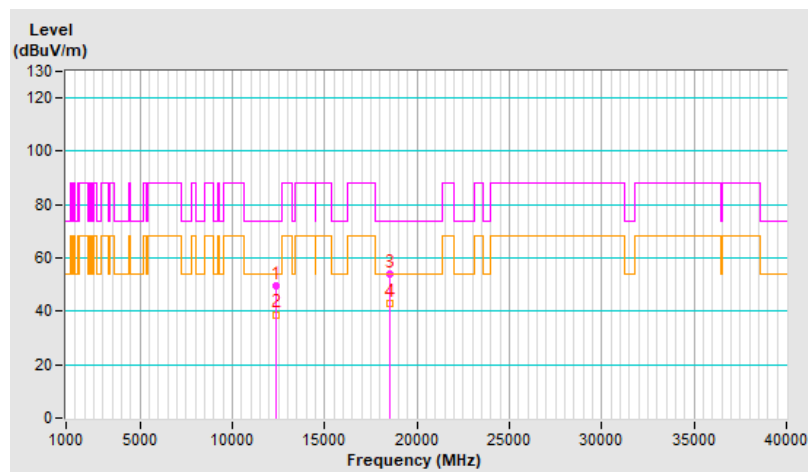


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.1 PK	74.0	-25.9	2.00 V	193	32.4	15.7
2	12350.00	38.8 AV	54.0	-15.2	2.00 V	193	23.1	15.7
3	18525.00	54.3 PK	74.0	-19.7	1.74 V	65	58.4	-4.1
4	18525.00	41.0 AV	54.0	-13.0	1.74 V	65	45.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

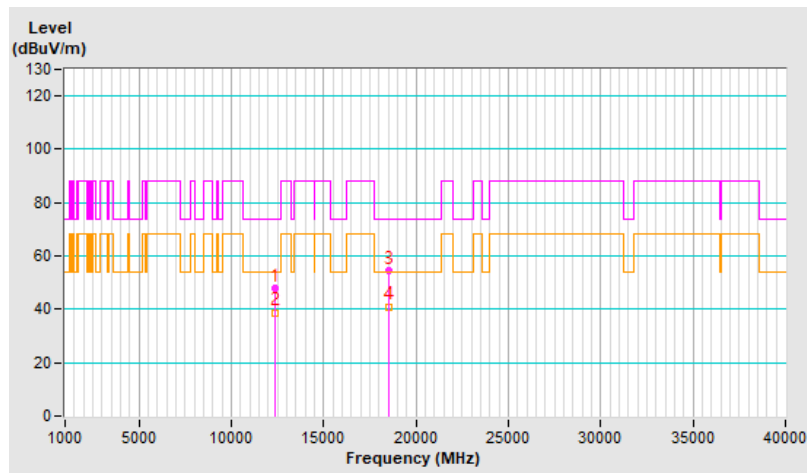


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.6 PK	88.2	-38.6	2.87 H	92	33.6	16.0
2	#12830.00	39.0 AV	68.2	-29.2	2.87 H	92	23.0	16.0
3	19245.00	54.1 PK	74.0	-19.9	1.51 H	258	57.2	-3.1
4	19245.00	43.3 AV	54.0	-10.7	1.51 H	258	46.4	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

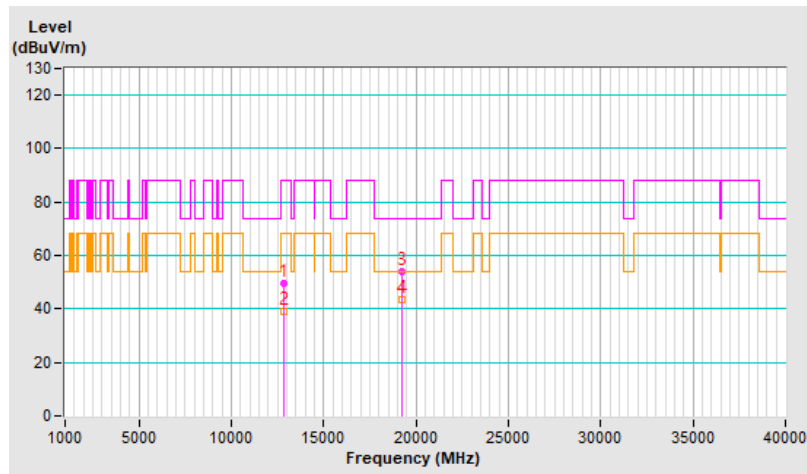


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.8 PK	88.2	-39.4	1.88 V	204	32.8	16.0
2	#12830.00	37.9 AV	68.2	-30.3	1.88 V	204	21.9	16.0
3	19245.00	54.6 PK	74.0	-19.4	1.75 V	67	57.7	-3.1
4	19245.00	42.9 AV	54.0	-11.1	1.75 V	67	46.0	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

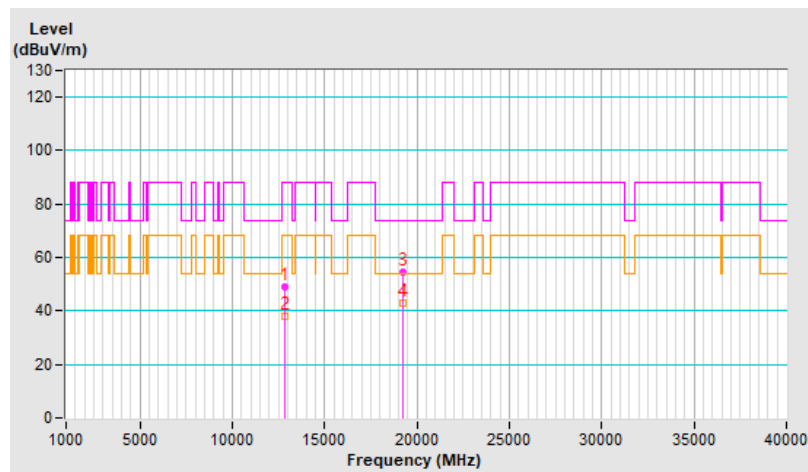


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	50.1 PK	88.2	-38.1	2.86 H	107	33.9	16.2
2	#12870.00	39.0 AV	68.2	-29.2	2.86 H	107	22.8	16.2
3	19305.00	53.8 PK	74.0	-20.2	1.47 H	244	56.8	-3.0
4	19305.00	43.0 AV	54.0	-11.0	1.47 H	244	46.0	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

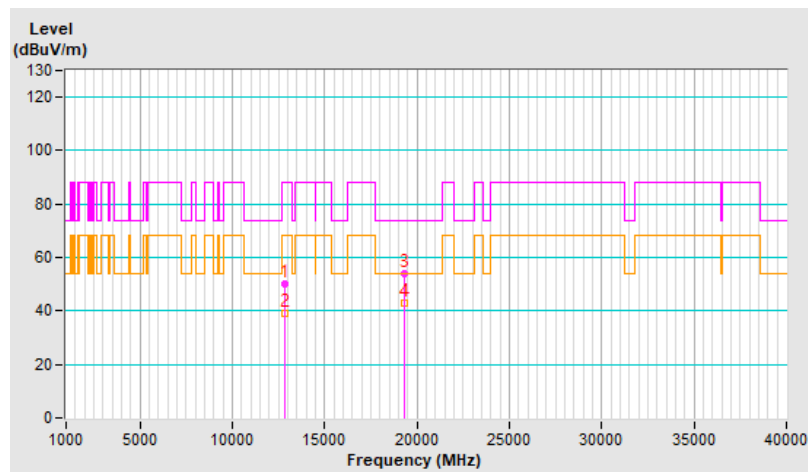


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.4 PK	88.2	-40.8	2.02 V	197	31.2	16.2
2	#12870.00	38.1 AV	68.2	-30.1	2.02 V	197	21.9	16.2
3	19305.00	55.1 PK	74.0	-18.9	1.77 V	55	58.1	-3.0
4	19305.00	41.7 AV	54.0	-12.3	1.77 V	55	44.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

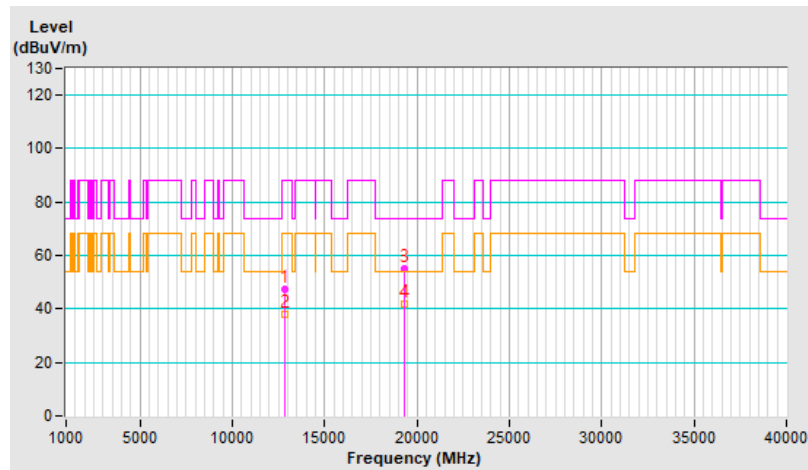


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12950.00	50.7 PK	88.2	-37.5	2.86 H	109	34.3	16.4
2	#12950.00	39.8 AV	68.2	-28.4	2.86 H	109	23.4	16.4
3	19425.00	54.5 PK	74.0	-19.5	1.51 H	242	58.1	-3.6
4	19425.00	43.7 AV	54.0	-10.3	1.51 H	242	47.3	-3.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

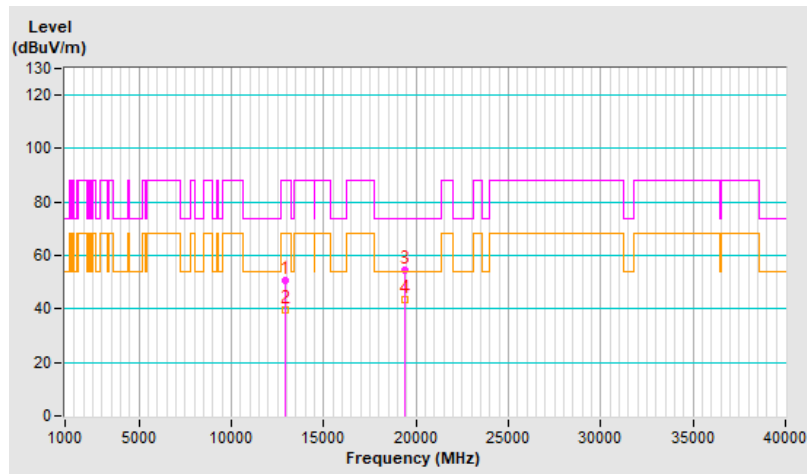


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.5 PK	88.2	-39.7	1.83 V	204	32.1	16.4
2	#12950.00	37.4 AV	68.2	-30.8	1.83 V	204	21.0	16.4
3	19425.00	54.8 PK	74.0	-19.2	1.70 V	68	58.4	-3.6
4	19425.00	43.3 AV	54.0	-10.7	1.70 V	68	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

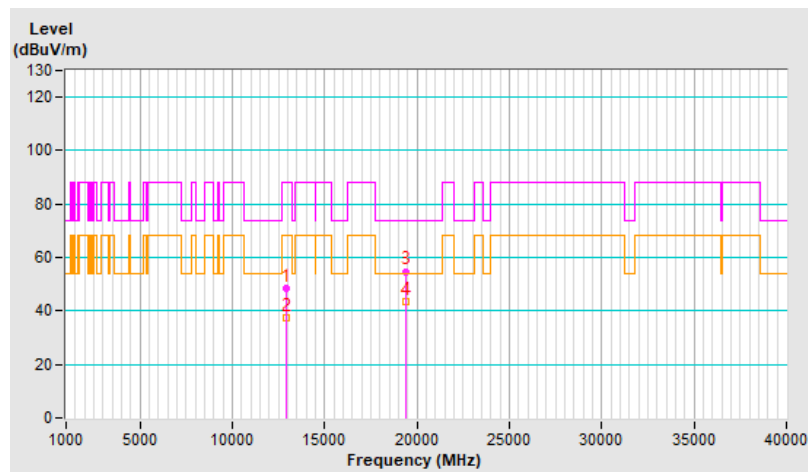


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	50.1 PK	88.2	-38.1	2.83 H	102	33.8	16.3
2	#13030.00	39.3 AV	68.2	-28.9	2.83 H	102	23.0	16.3
3	19545.00	54.8 PK	74.0	-19.2	1.48 H	253	58.7	-3.9
4	19545.00	43.7 AV	54.0	-10.3	1.48 H	253	47.6	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

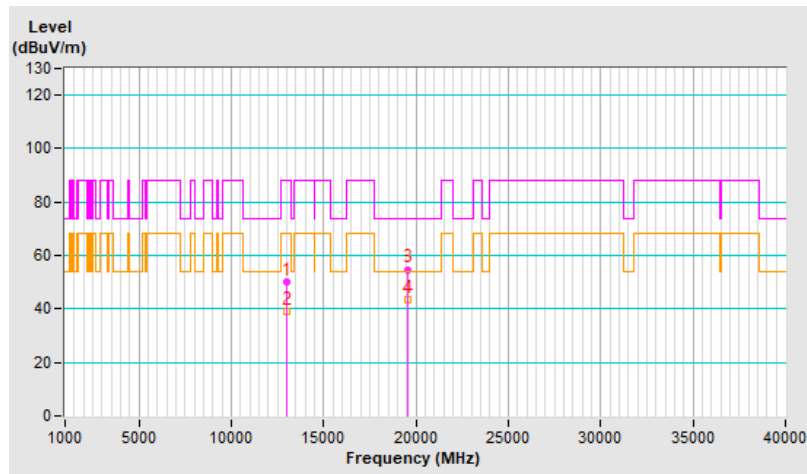


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.4 PK	88.2	-40.8	2.04 V	188	31.1	16.3
2	#13030.00	38.2 AV	68.2	-30.0	2.04 V	188	21.9	16.3
3	19545.00	54.6 PK	74.0	-19.4	1.71 V	66	58.5	-3.9
4	19545.00	41.4 AV	54.0	-12.6	1.71 V	66	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

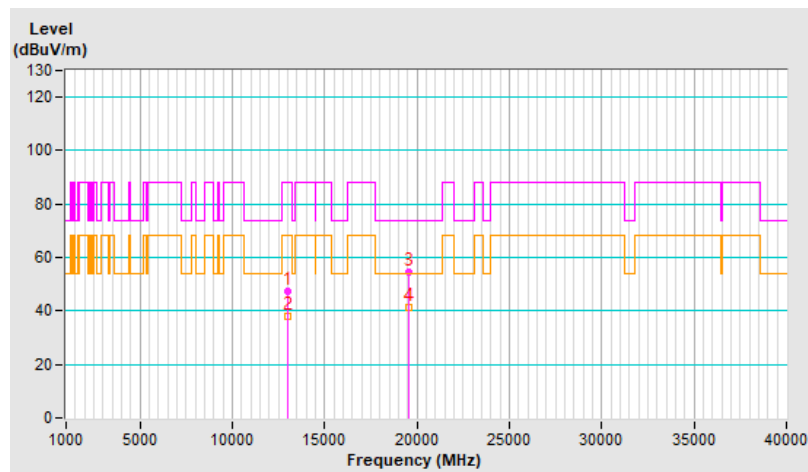


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	49.7 PK	88.2	-38.5	2.95 H	108	33.4	16.3
2	#13070.00	39.0 AV	68.2	-29.2	2.95 H	108	22.7	16.3
3	19605.00	54.2 PK	74.0	-19.8	1.42 H	252	58.2	-4.0
4	19605.00	42.5 AV	54.0	-11.5	1.42 H	252	46.5	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

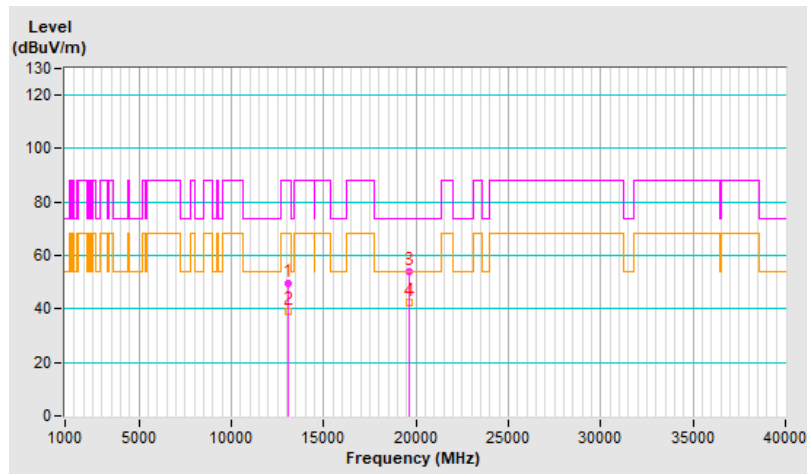


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	2.01 V	191	31.5	16.3
2	#13070.00	38.5 AV	68.2	-29.7	2.01 V	191	22.2	16.3
3	19605.00	54.7 PK	74.0	-19.3	1.76 V	64	58.7	-4.0
4	19605.00	41.4 AV	54.0	-12.6	1.76 V	64	45.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

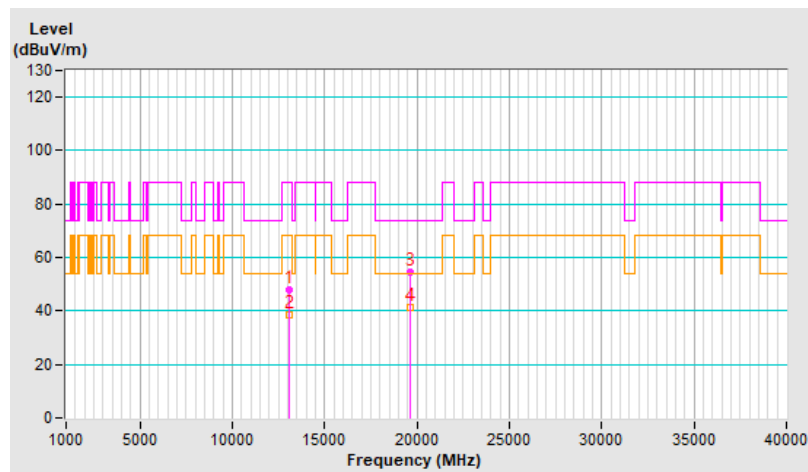


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.7 PK	74.0	-24.3	2.89 H	124	31.8	17.9
2	13390.00	39.2 AV	54.0	-14.8	2.89 H	124	21.3	17.9
3	20085.00	54.7 PK	74.0	-19.3	1.36 H	237	57.7	-3.0
4	20085.00	42.7 AV	54.0	-11.3	1.36 H	237	45.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

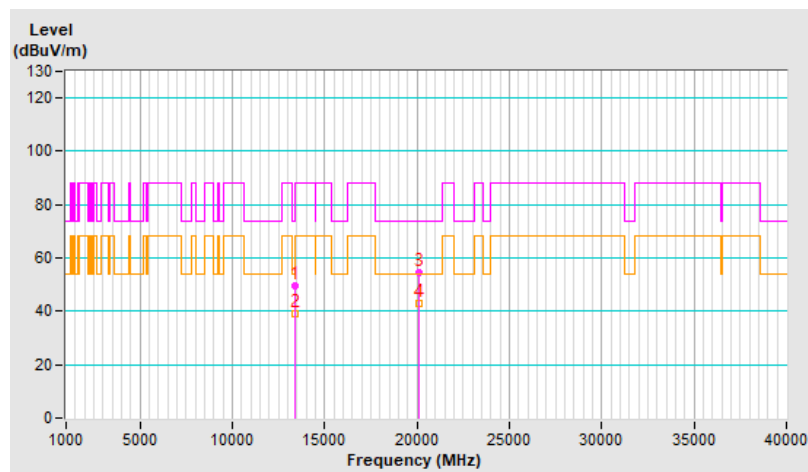


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	47.2 PK	74.0	-26.8	2.03 V	183	29.3	17.9
2	13390.00	38.1 AV	54.0	-15.9	2.03 V	183	20.2	17.9
3	20085.00	55.4 PK	74.0	-18.6	1.75 V	56	58.4	-3.0
4	20085.00	42.1 AV	54.0	-11.9	1.75 V	56	45.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

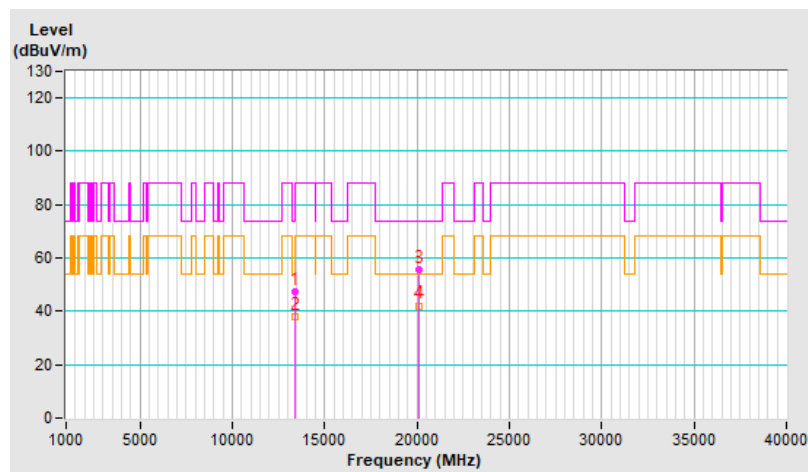


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.8 PK	88.2	-38.4	2.98 H	114	30.9	18.9
2	#13710.00	39.1 AV	68.2	-29.1	2.98 H	114	20.2	18.9
3	20565.00	53.8 PK	74.0	-20.2	1.42 H	261	56.6	-2.8
4	20565.00	42.3 AV	54.0	-11.7	1.42 H	261	45.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

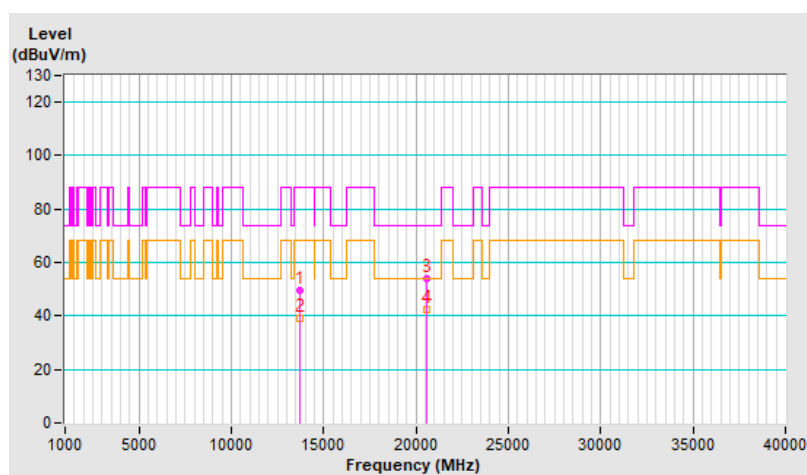


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13710.00	47.1 PK	88.2	-41.1	2.03 V	199	28.2	18.9
2	#13710.00	38.1 AV	68.2	-30.1	2.03 V	199	19.2	18.9
3	20565.00	55.3 PK	74.0	-18.7	1.79 V	49	58.1	-2.8
4	20565.00	41.8 AV	54.0	-12.2	1.79 V	49	44.6	-2.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

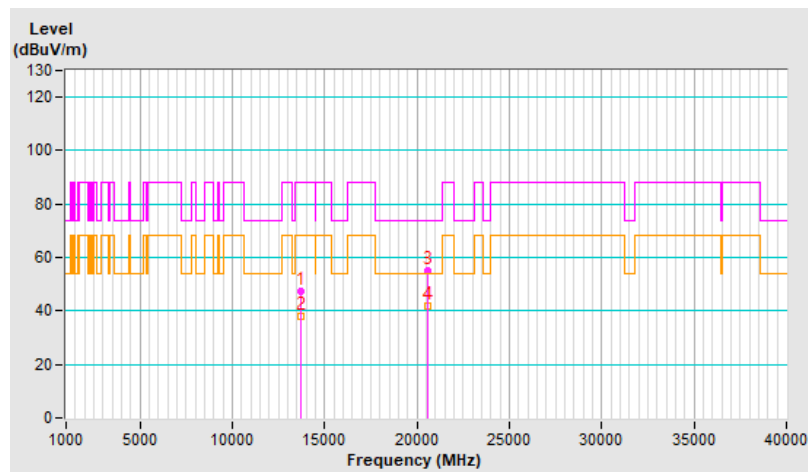


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.6 PK	88.2	-38.6	2.93 H	105	30.7	18.9
2	#13750.00	38.6 AV	68.2	-29.6	2.93 H	105	19.7	18.9
3	20625.00	53.9 PK	74.0	-20.1	1.46 H	253	56.8	-2.9
4	20625.00	42.0 AV	54.0	-12.0	1.46 H	253	44.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

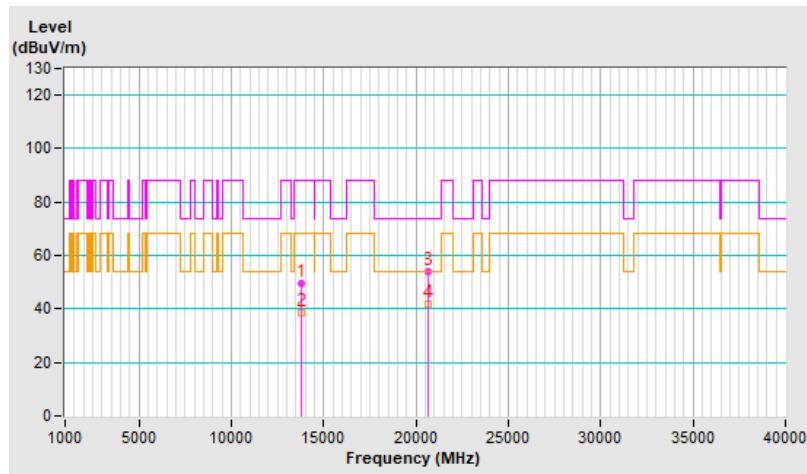


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.6 PK	88.2	-40.6	2.06 V	207	28.7	18.9
2	#13750.00	38.2 AV	68.2	-30.0	2.06 V	207	19.3	18.9
3	20625.00	55.6 PK	74.0	-18.4	1.78 V	63	58.5	-2.9
4	20625.00	42.0 AV	54.0	-12.0	1.78 V	63	44.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

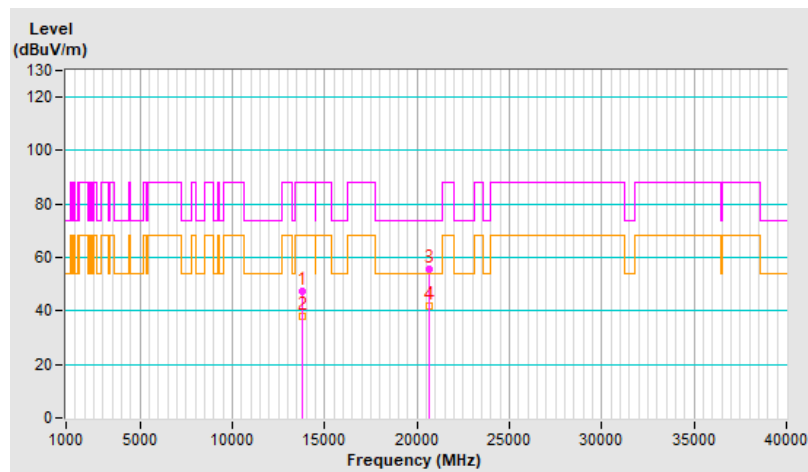


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.6 PK	88.2	-38.6	2.92 H	110	30.7	18.9
2	#13990.00	38.6 AV	68.2	-29.6	2.92 H	110	19.7	18.9
3	20985.00	54.4 PK	74.0	-19.6	1.45 H	249	56.4	-2.0
4	20985.00	42.6 AV	54.0	-11.4	1.45 H	249	44.6	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

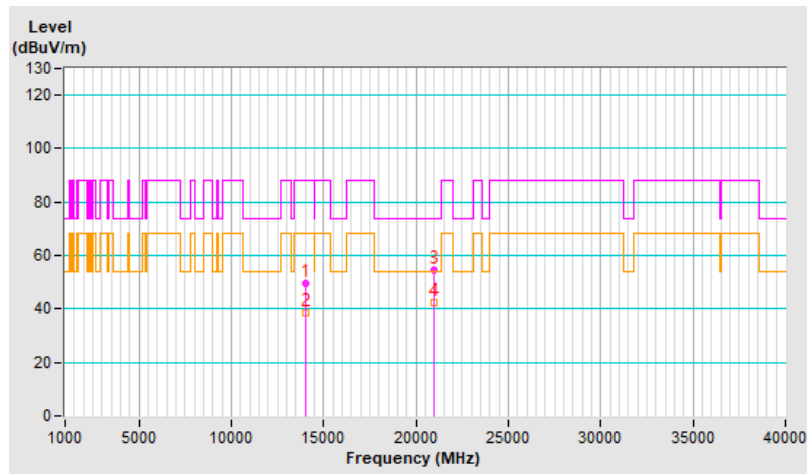


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.8 PK	88.2	-40.4	1.99 V	196	28.9	18.9
2	#13990.00	38.6 AV	68.2	-29.6	1.99 V	196	19.7	18.9
3	20985.00	55.0 PK	74.0	-19.0	1.80 V	45	57.0	-2.0
4	20985.00	41.8 AV	54.0	-12.2	1.80 V	45	43.8	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

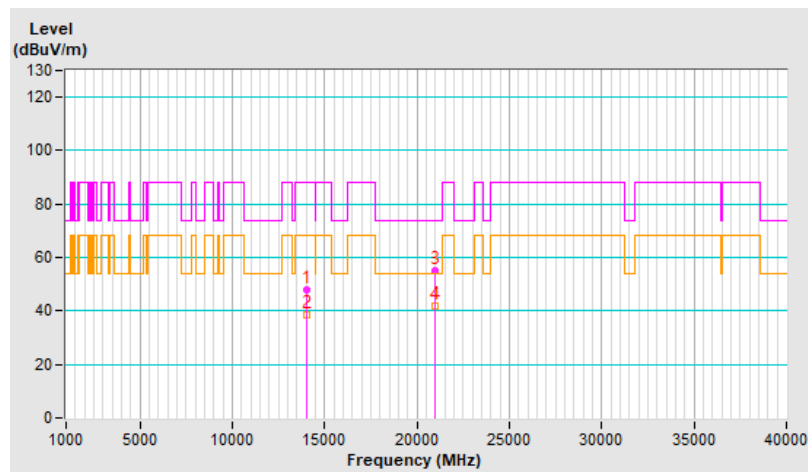


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	49.2 PK	88.2	-39.0	2.97 H	104	29.6	19.6
2	#14230.00	38.8 AV	68.2	-29.4	2.97 H	104	19.2	19.6
3	21345.00	53.8 PK	74.0	-20.2	1.45 H	260	55.5	-1.7
4	21345.00	42.2 AV	54.0	-11.8	1.45 H	260	43.9	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

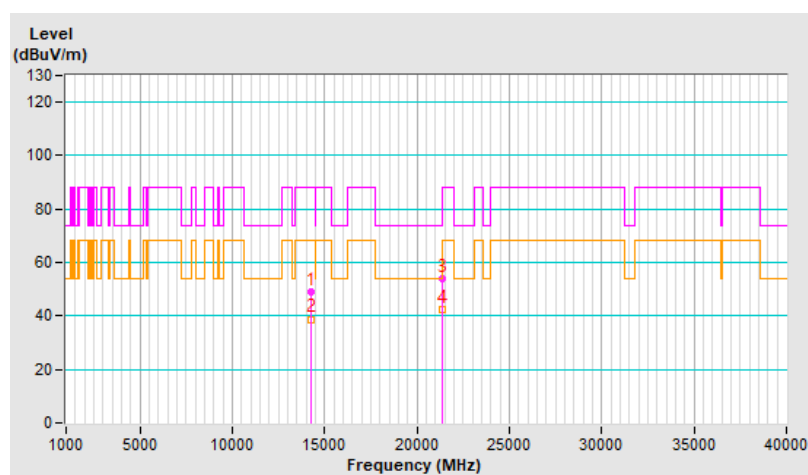


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.5 PK	88.2	-40.7	2.03 V	203	27.9	19.6
2	#14230.00	38.5 AV	68.2	-29.7	2.03 V	203	18.9	19.6
3	21345.00	55.7 PK	74.0	-18.3	1.71 V	67	57.4	-1.7
4	21345.00	42.1 AV	54.0	-11.9	1.71 V	67	43.8	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

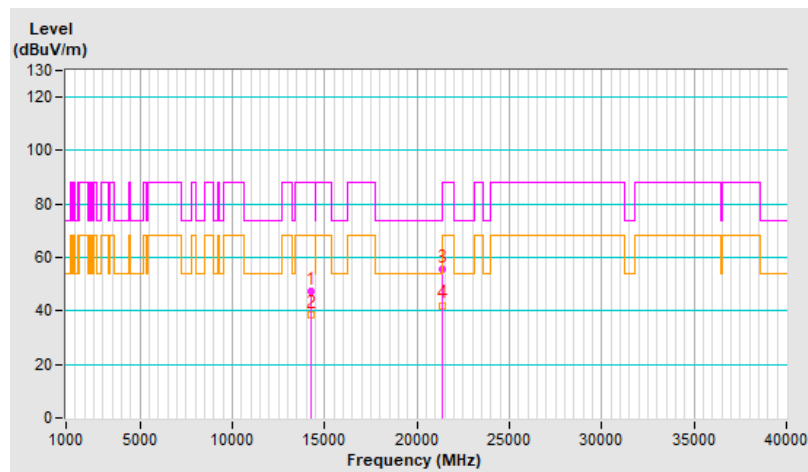


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	49.4 PK	74.0	-24.6	2.93 H	119	33.4	16.0
2	11930.00	38.7 AV	54.0	-15.3	2.93 H	119	22.7	16.0
3	17895.00	54.0 PK	74.0	-20.0	1.37 H	242	26.1	27.9
4	17895.00	42.1 AV	54.0	-11.9	1.37 H	242	14.2	27.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

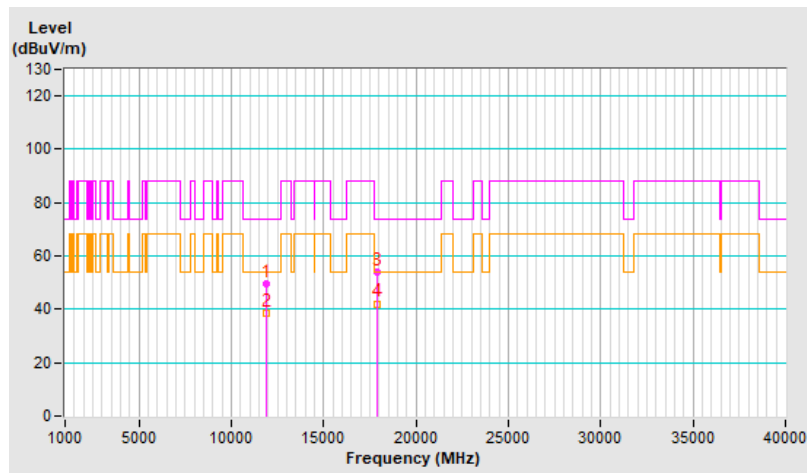


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	47.1 PK	74.0	-26.9	2.03 V	184	31.1	16.0
2	11930.00	38.1 AV	54.0	-15.9	2.03 V	184	22.1	16.0
3	17895.00	55.3 PK	74.0	-18.7	1.72 V	47	27.4	27.9
4	17895.00	41.8 AV	54.0	-12.2	1.72 V	47	13.9	27.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

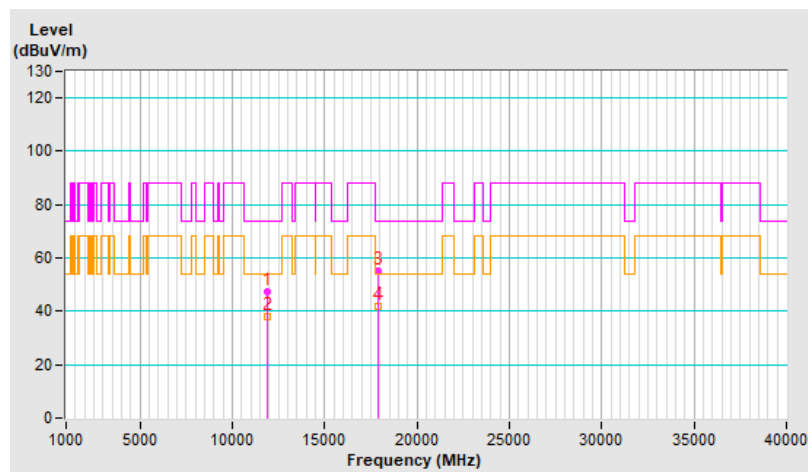


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	49.5 PK	74.0	-24.5	2.94 H	105	33.8	15.7
2	12330.00	39.0 AV	54.0	-15.0	2.94 H	105	23.3	15.7
3	18495.00	54.8 PK	74.0	-19.2	1.39 H	247	58.9	-4.1
4	18495.00	42.9 AV	54.0	-11.1	1.39 H	247	47.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

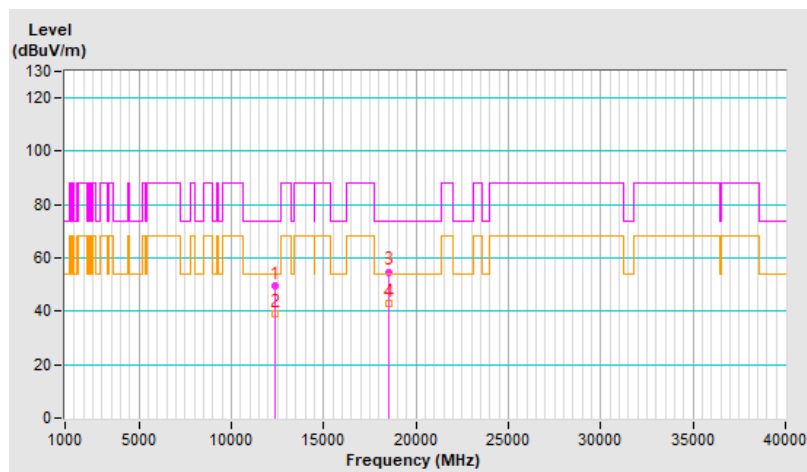


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	47.6 PK	74.0	-26.4	1.99 V	190	31.9	15.7
2	12330.00	38.0 AV	54.0	-16.0	1.99 V	190	22.3	15.7
3	18495.00	55.1 PK	74.0	-18.9	1.74 V	41	59.2	-4.1
4	18495.00	42.0 AV	54.0	-12.0	1.74 V	41	46.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

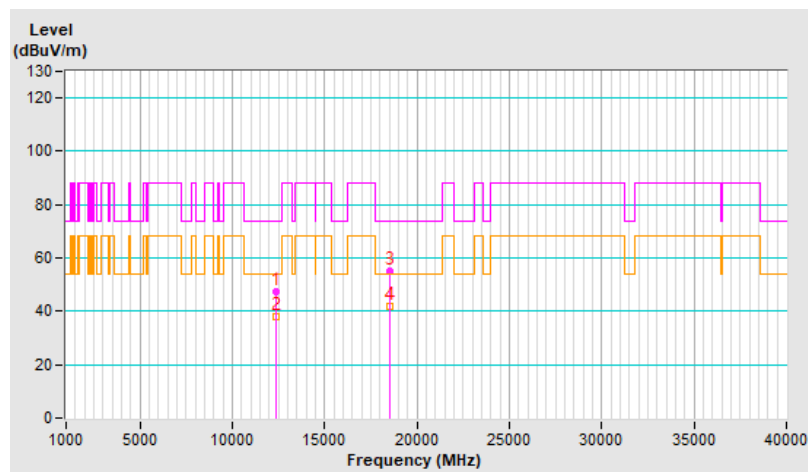


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12810.00	49.5 PK	88.2	-38.7	2.93 H	102	33.6	15.9
2	#12810.00	38.9 AV	68.2	-29.3	2.93 H	102	23.0	15.9
3	19215.00	54.1 PK	74.0	-19.9	1.38 H	237	57.3	-3.2
4	19215.00	42.4 AV	54.0	-11.6	1.38 H	237	45.6	-3.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

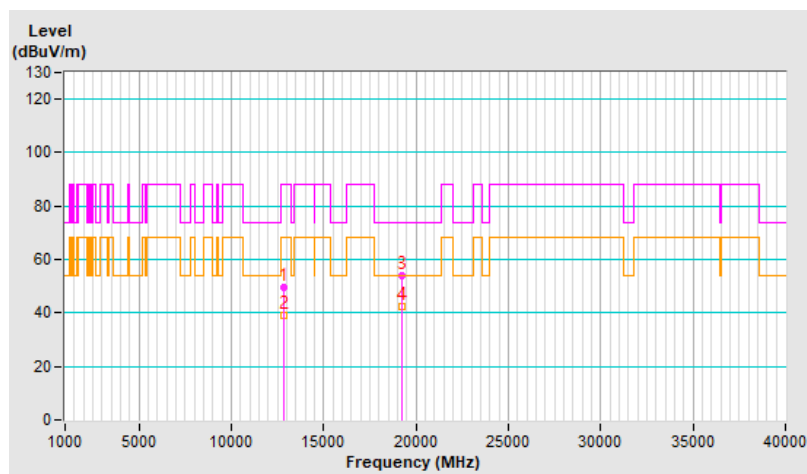


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	47.2 PK	88.2	-41.0	1.96 V	195	31.3	15.9
2	#12810.00	38.1 AV	68.2	-30.1	1.96 V	195	22.2	15.9
3	19215.00	55.9 PK	74.0	-18.1	1.78 V	69	59.1	-3.2
4	19215.00	42.2 AV	54.0	-11.8	1.78 V	69	45.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

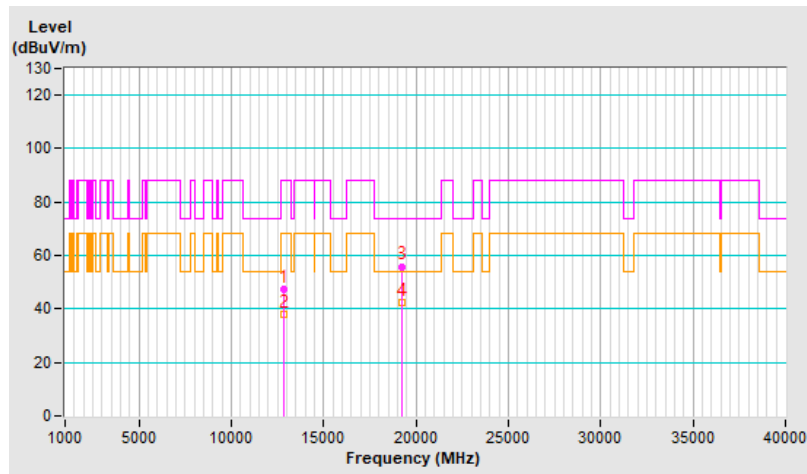


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	49.7 PK	88.2	-38.5	2.98 H	112	33.4	16.3
2	#12890.00	38.8 AV	68.2	-29.4	2.98 H	112	22.5	16.3
3	19335.00	53.8 PK	74.0	-20.2	1.44 H	238	57.0	-3.2
4	19335.00	42.1 AV	54.0	-11.9	1.44 H	238	45.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

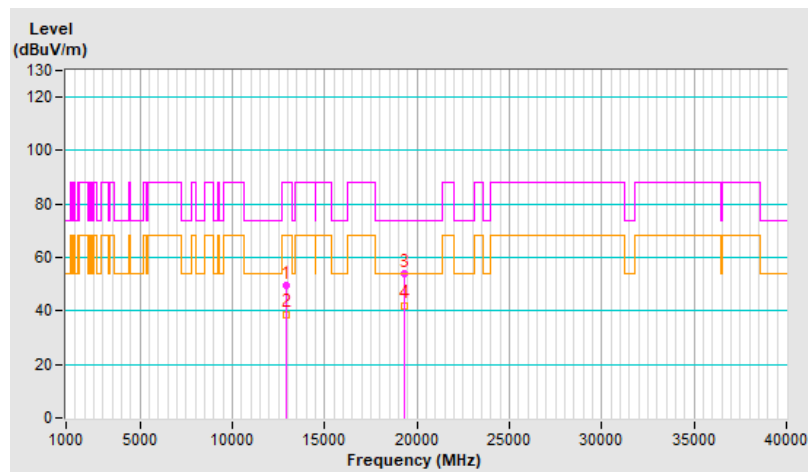


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	47.0 PK	88.2	-41.2	2.05 V	210	30.7	16.3
2	#12890.00	37.7 AV	68.2	-30.5	2.05 V	210	21.4	16.3
3	19335.00	54.8 PK	74.0	-19.2	1.82 V	44	58.0	-3.2
4	19335.00	41.2 AV	54.0	-12.8	1.82 V	44	44.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

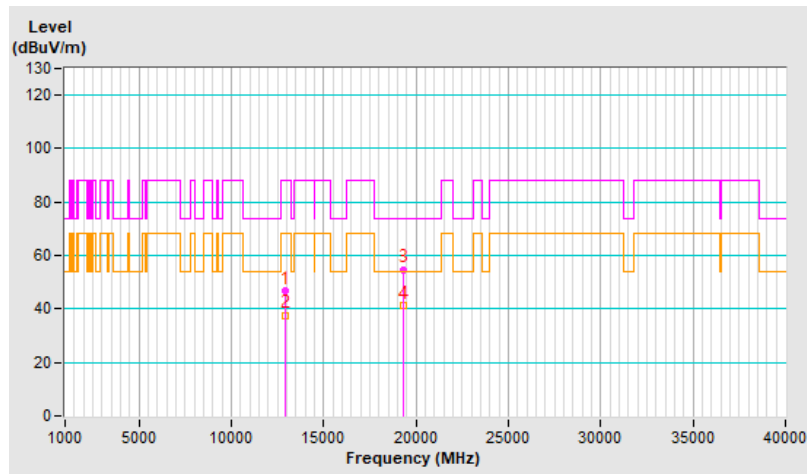


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	49.6 PK	88.2	-38.6	2.91 H	121	33.2	16.4
2	#12970.00	38.7 AV	68.2	-29.5	2.91 H	121	22.3	16.4
3	19455.00	54.9 PK	74.0	-19.1	1.41 H	242	58.6	-3.7
4	19455.00	43.0 AV	54.0	-11.0	1.41 H	242	46.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

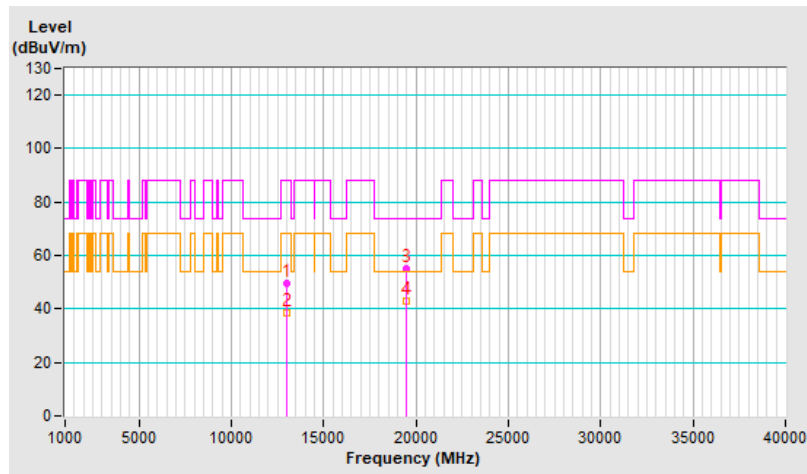


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	47.8 PK	88.2	-40.4	2.04 V	186	31.4	16.4
2	#12970.00	38.6 AV	68.2	-29.6	2.04 V	186	22.2	16.4
3	19455.00	55.4 PK	74.0	-18.6	1.81 V	69	59.1	-3.7
4	19455.00	41.7 AV	54.0	-12.3	1.81 V	69	45.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

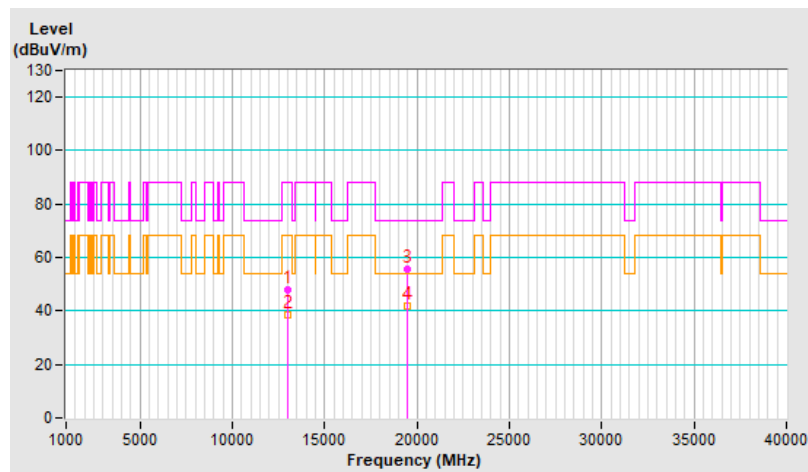


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	49.4 PK	88.2	-38.8	2.92 H	102	33.1	16.3
2	#13050.00	38.6 AV	68.2	-29.6	2.92 H	102	22.3	16.3
3	19575.00	54.1 PK	74.0	-19.9	1.46 H	241	58.0	-3.9
4	19575.00	42.5 AV	54.0	-11.5	1.46 H	241	46.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

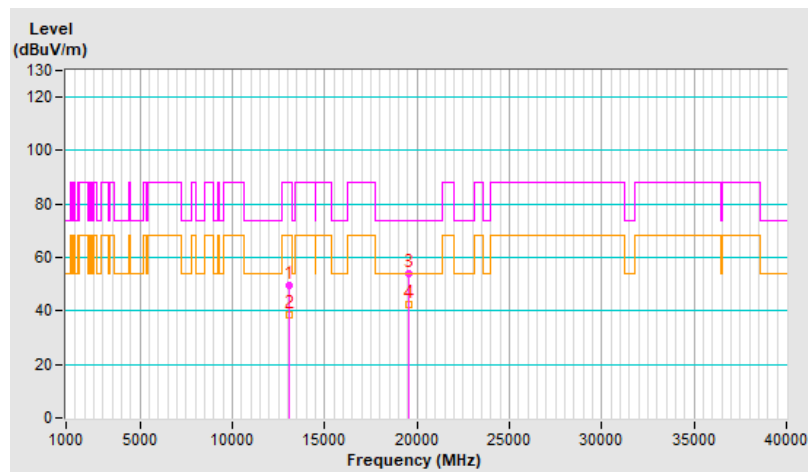


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	47.8 PK	88.2	-40.4	1.96 V	190	31.5	16.3
2	#13050.00	38.5 AV	68.2	-29.7	1.96 V	190	22.2	16.3
3	19575.00	55.2 PK	74.0	-18.8	1.75 V	63	59.1	-3.9
4	19575.00	42.1 AV	54.0	-11.9	1.75 V	63	46.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

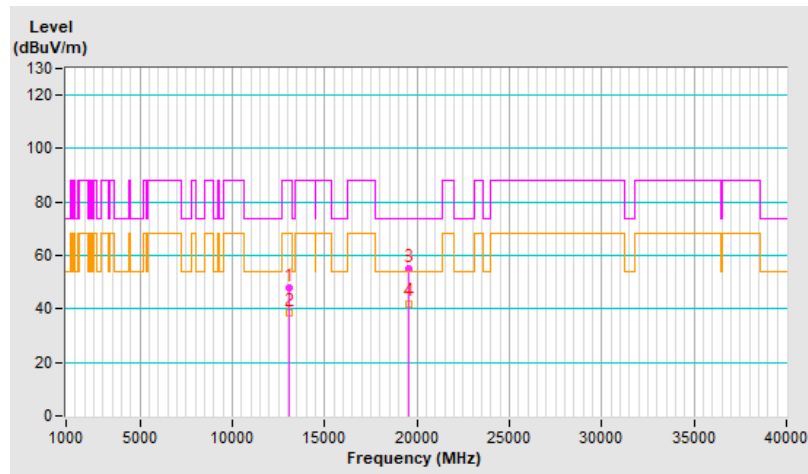


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	49.8 PK	88.2	-38.4	2.91 H	105	33.3	16.5
2	#13130.00	38.9 AV	68.2	-29.3	2.91 H	105	22.4	16.5
3	19695.00	54.1 PK	74.0	-19.9	1.44 H	251	57.5	-3.4
4	19695.00	42.3 AV	54.0	-11.7	1.44 H	251	45.7	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

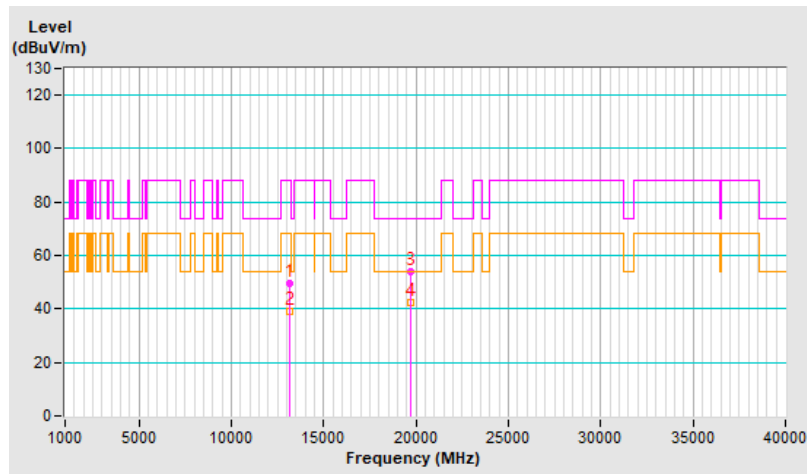


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	47.5 PK	88.2	-40.7	2.05 V	213	31.0	16.5
2	#13130.00	38.1 AV	68.2	-30.1	2.05 V	213	21.6	16.5
3	19695.00	54.8 PK	74.0	-19.2	1.77 V	69	58.2	-3.4
4	19695.00	41.6 AV	54.0	-12.4	1.77 V	69	45.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

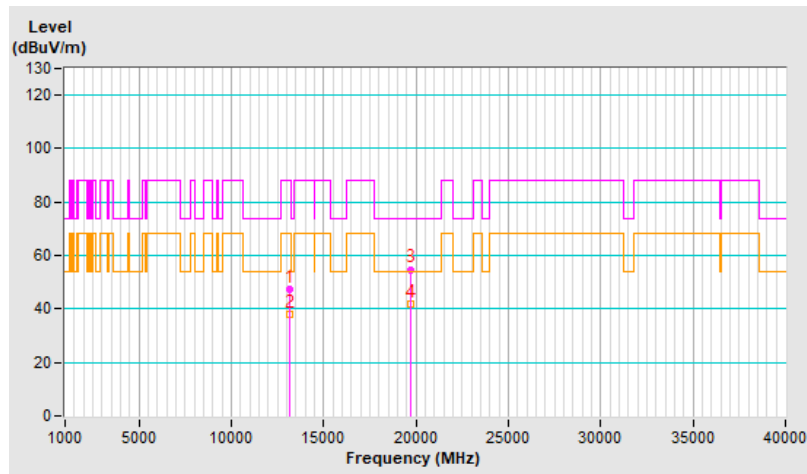


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	50.0 PK	88.2	-38.2	2.94 H	115	31.9	18.1
2	#13450.00	39.3 AV	68.2	-28.9	2.94 H	115	21.2	18.1
3	20175.00	54.7 PK	74.0	-19.3	1.44 H	248	57.7	-3.0
4	20175.00	42.9 AV	54.0	-11.1	1.44 H	248	45.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

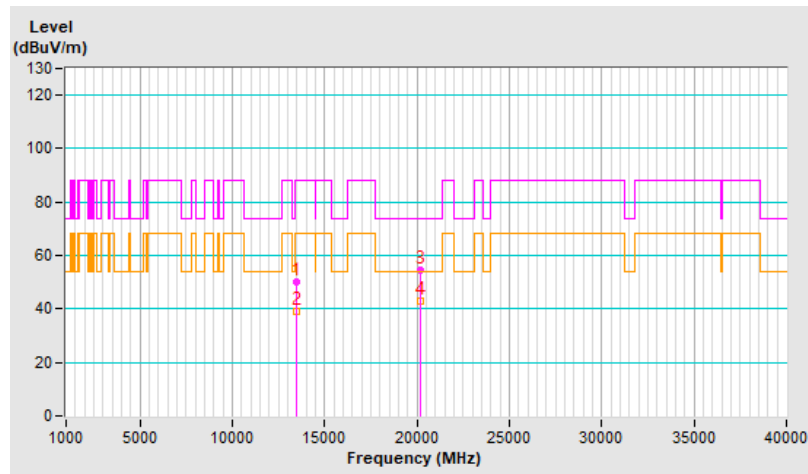


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13450.00	48.0 PK	88.2	-40.2	2.03 V	203	29.9	18.1
2	#13450.00	38.5 AV	68.2	-29.7	2.03 V	203	20.4	18.1
3	20175.00	55.7 PK	74.0	-18.3	1.74 V	48	58.7	-3.0
4	20175.00	42.2 AV	54.0	-11.8	1.74 V	48	45.2	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

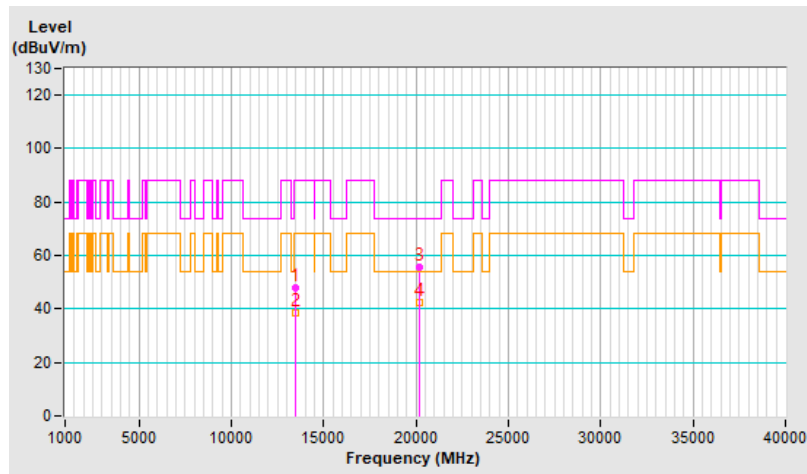


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	49.4 PK	88.2	-38.8	2.91 H	102	30.4	19.0
2	#13690.00	38.9 AV	68.2	-29.3	2.91 H	102	19.9	19.0
3	20535.00	54.4 PK	74.0	-19.6	1.48 H	242	57.0	-2.6
4	20535.00	42.7 AV	54.0	-11.3	1.48 H	242	45.3	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

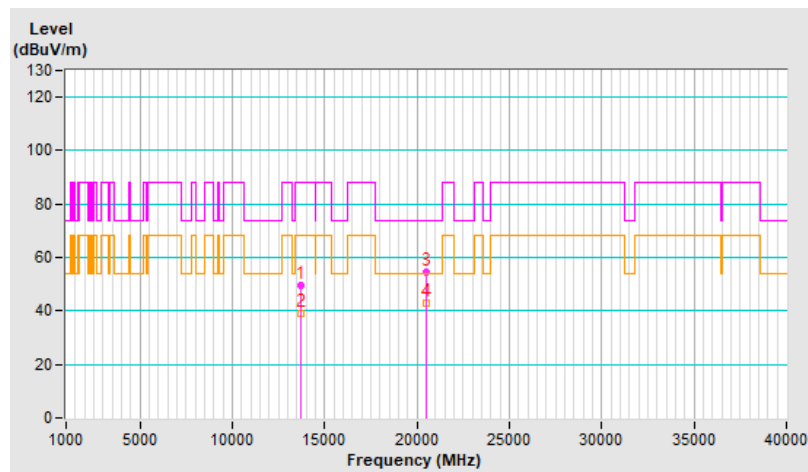




RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	47.9 PK	88.2	-40.3	1.98 V	190	28.9	19.0
2	#13690.00	38.4 AV	68.2	-29.8	1.98 V	190	19.4	19.0
3	20535.00	55.9 PK	74.0	-18.1	1.76 V	50	58.5	-2.6
4	20535.00	42.3 AV	54.0	-11.7	1.76 V	50	44.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

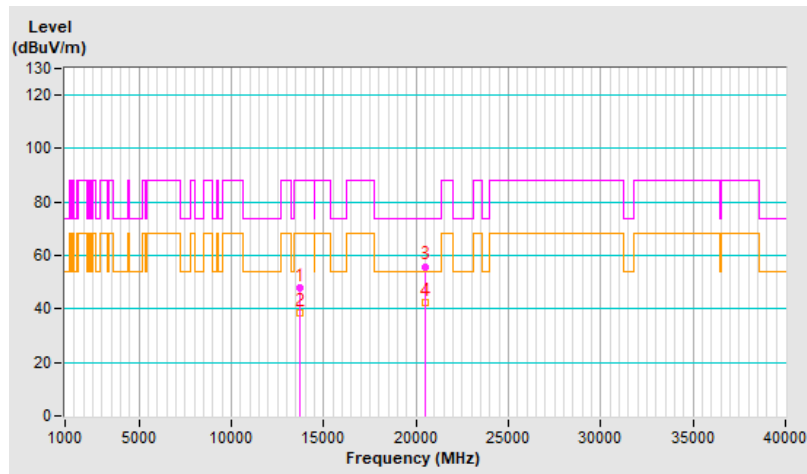


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	50.0 PK	88.2	-38.2	2.92 H	111	31.2	18.8
2	#13770.00	39.0 AV	68.2	-29.2	2.92 H	111	20.2	18.8
3	20655.00	53.9 PK	74.0	-20.1	1.41 H	254	56.5	-2.6
4	20655.00	42.4 AV	54.0	-11.6	1.41 H	254	45.0	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

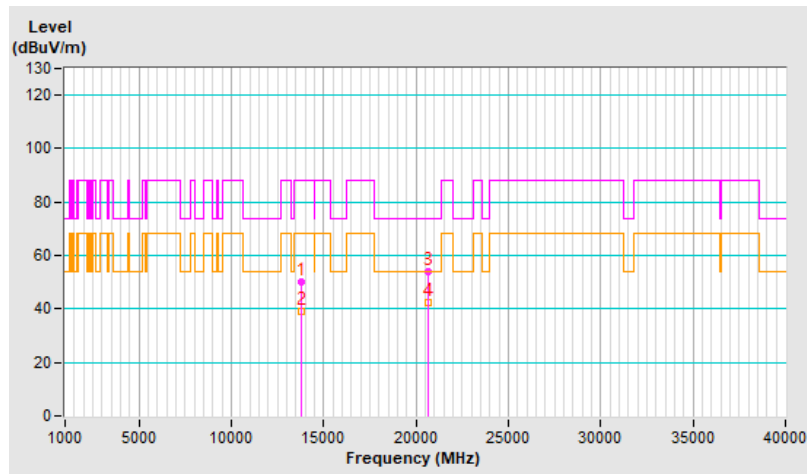


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	48.3 PK	88.2	-39.9	2.02 V	189	29.5	18.8
2	#13770.00	38.7 AV	68.2	-29.5	2.02 V	189	19.9	18.8
3	20655.00	56.2 PK	74.0	-17.8	1.69 V	64	58.8	-2.6
4	20655.00	42.6 AV	54.0	-11.4	1.69 V	64	45.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

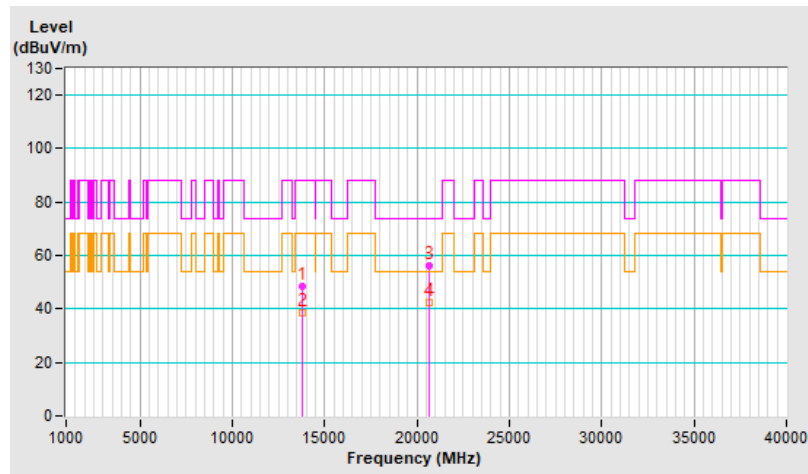


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	49.5 PK	88.2	-38.7	2.97 H	103	30.5	19.0
2	#14010.00	38.7 AV	68.2	-29.5	2.97 H	103	19.7	19.0
3	21015.00	53.8 PK	74.0	-20.2	1.41 H	261	55.8	-2.0
4	21015.00	42.1 AV	54.0	-11.9	1.41 H	261	44.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

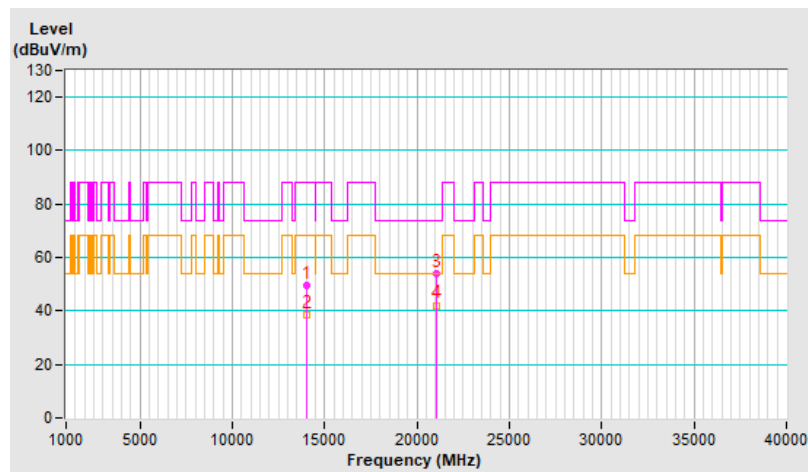


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	48.6 PK	88.2	-39.6	1.98 V	210	29.6	19.0
2	#14010.00	38.8 AV	68.2	-29.4	1.98 V	210	19.8	19.0
3	21015.00	55.9 PK	74.0	-18.1	1.72 V	57	57.9	-2.0
4	21015.00	42.3 AV	54.0	-11.7	1.72 V	57	44.3	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

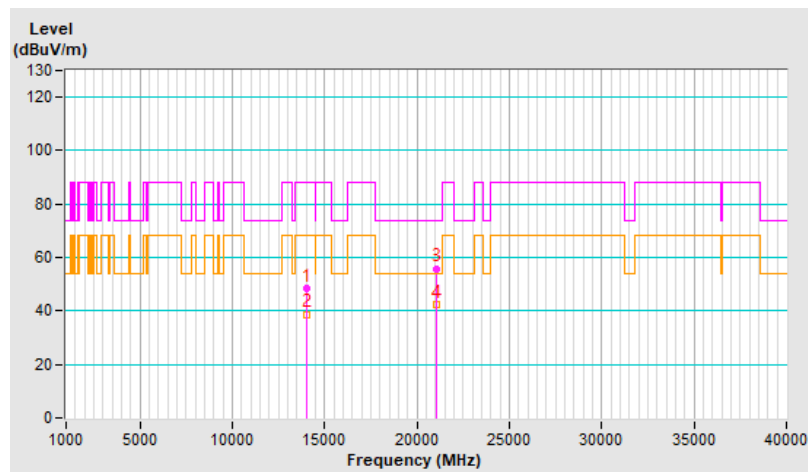


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	49.1 PK	88.2	-39.1	2.90 H	102	29.7	19.4
2	#14170.00	38.6 AV	68.2	-29.6	2.90 H	102	19.2	19.4
3	21255.00	54.1 PK	74.0	-19.9	1.37 H	250	55.5	-1.4
4	21255.00	42.3 AV	54.0	-11.7	1.37 H	250	43.7	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

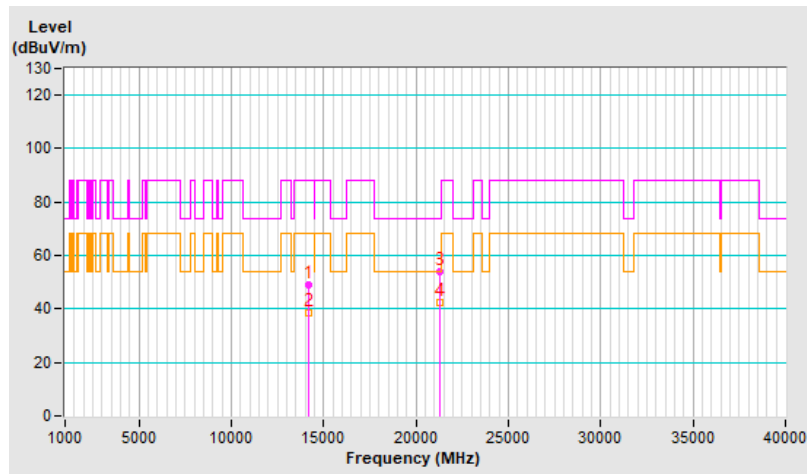


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	48.1 PK	88.2	-40.1	2.07 V	212	28.7	19.4
2	#14170.00	38.4 AV	68.2	-29.8	2.07 V	212	19.0	19.4
3	21255.00	55.8 PK	74.0	-18.2	1.78 V	36	57.2	-1.4
4	21255.00	42.1 AV	54.0	-11.9	1.78 V	36	43.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

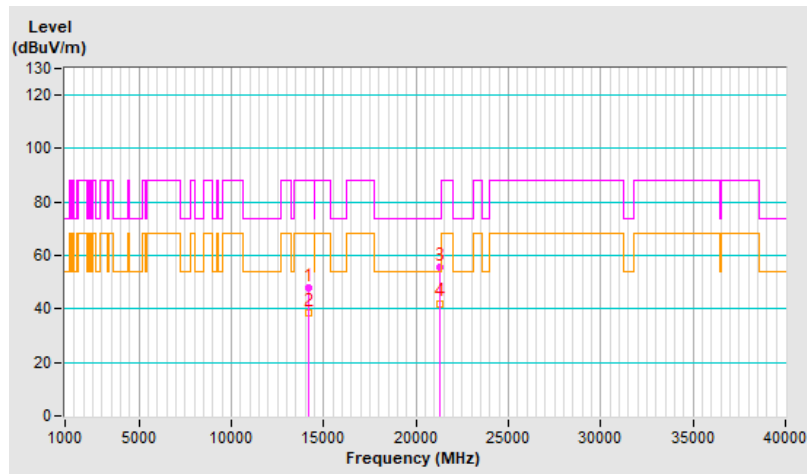


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	49.6 PK	74.0	-24.4	2.93 H	119	33.3	16.3
2	11970.00	38.7 AV	54.0	-15.3	2.93 H	119	22.4	16.3
3	17955.00	54.0 PK	74.0	-20.0	1.39 H	246	24.9	29.1
4	17955.00	42.5 AV	54.0	-11.5	1.39 H	246	13.4	29.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

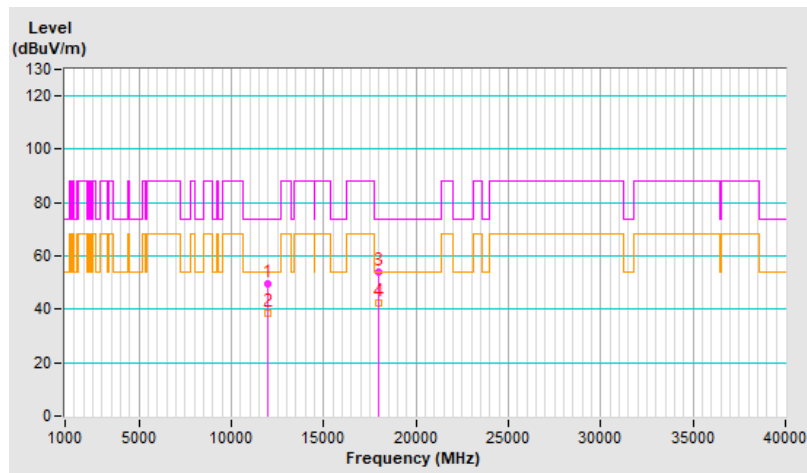


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.0 PK	74.0	-26.0	1.99 V	192	31.7	16.3
2	11970.00	38.5 AV	54.0	-15.5	1.99 V	192	22.2	16.3
3	17955.00	55.5 PK	74.0	-18.5	1.72 V	55	26.4	29.1
4	17955.00	42.0 AV	54.0	-12.0	1.72 V	55	12.9	29.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

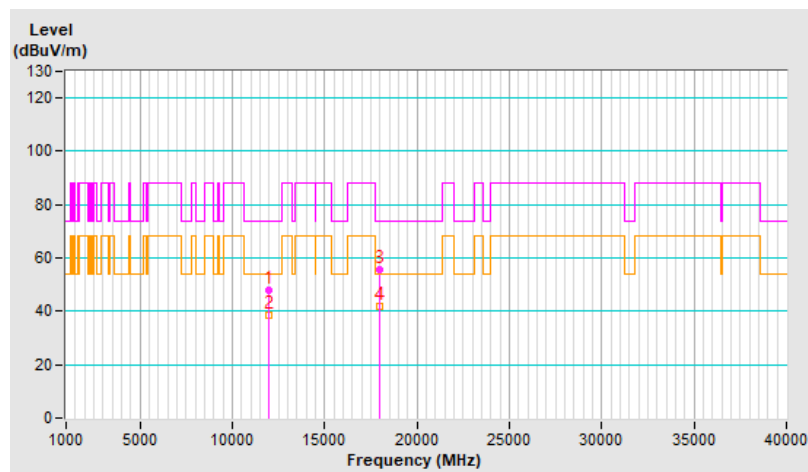


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	49.7 PK	74.0	-24.3	2.90 H	106	33.9	15.8
2	12290.00	39.0 AV	54.0	-15.0	2.90 H	106	23.2	15.8
3	18435.00	54.8 PK	74.0	-19.2	1.43 H	240	58.9	-4.1
4	18435.00	42.9 AV	54.0	-11.1	1.43 H	240	47.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

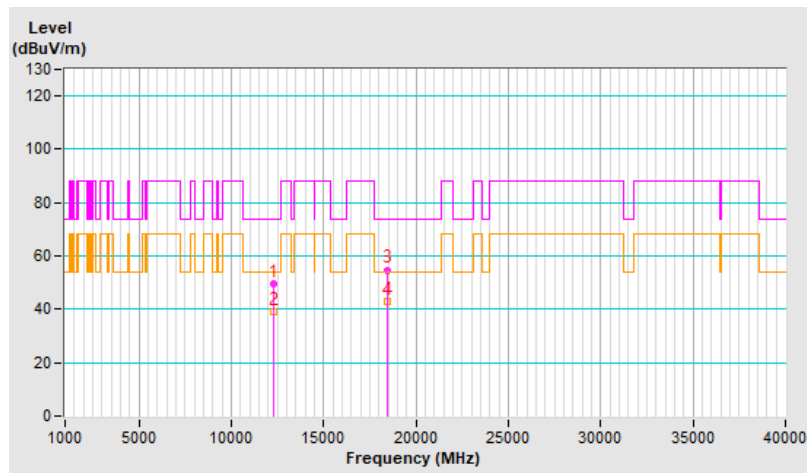


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	47.3 PK	74.0	-26.7	2.02 V	206	31.5	15.8
2	12290.00	38.1 AV	54.0	-15.9	2.02 V	206	22.3	15.8
3	18435.00	55.4 PK	74.0	-18.6	1.72 V	54	59.5	-4.1
4	18435.00	42.0 AV	54.0	-12.0	1.72 V	54	46.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

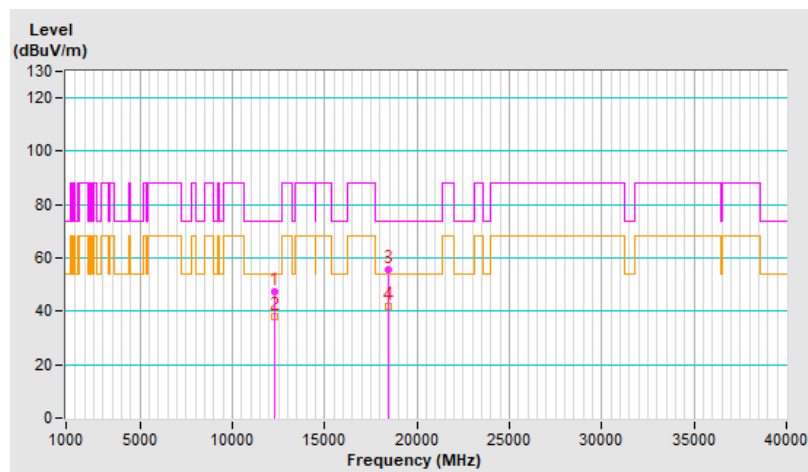


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	49.7 PK	88.2	-38.5	2.92 H	102	34.0	15.7
2	#12770.00	38.7 AV	68.2	-29.5	2.92 H	102	23.0	15.7
3	19155.00	54.3 PK	74.0	-19.7	1.46 H	268	57.6	-3.3
4	19155.00	42.4 AV	54.0	-11.6	1.46 H	268	45.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

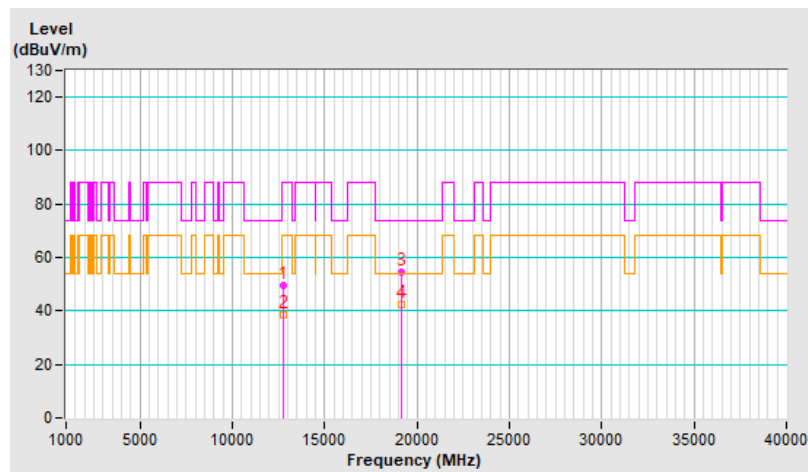


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	47.5 PK	88.2	-40.7	2.04 V	209	31.8	15.7
2	#12770.00	38.0 AV	68.2	-30.2	2.04 V	209	22.3	15.7
3	19155.00	55.7 PK	74.0	-18.3	1.71 V	61	59.0	-3.3
4	19155.00	42.0 AV	54.0	-12.0	1.71 V	61	45.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

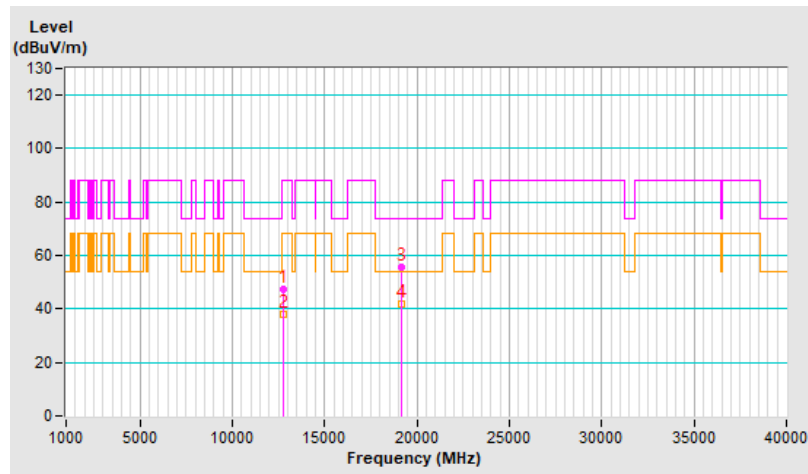


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	49.7 PK	88.2	-38.5	2.94 H	107	33.4	16.3
2	#12930.00	39.2 AV	68.2	-29.0	2.94 H	107	22.9	16.3
3	19395.00	53.7 PK	74.0	-20.3	1.44 H	266	57.3	-3.6
4	19395.00	42.2 AV	54.0	-11.8	1.44 H	266	45.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

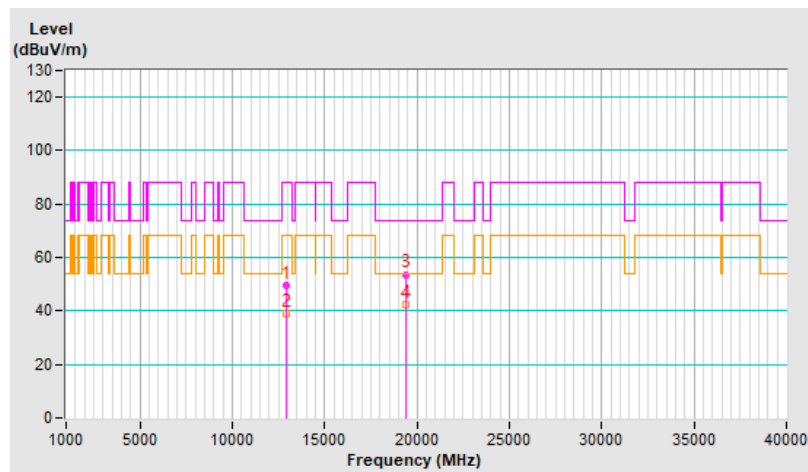


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.8 PK	88.2	-40.4	2.04 V	210	31.5	16.3
2	#12930.00	38.5 AV	68.2	-29.7	2.04 V	210	22.2	16.3
3	19395.00	55.8 PK	74.0	-18.2	1.69 V	47	59.4	-3.6
4	19395.00	42.1 AV	54.0	-11.9	1.69 V	47	45.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

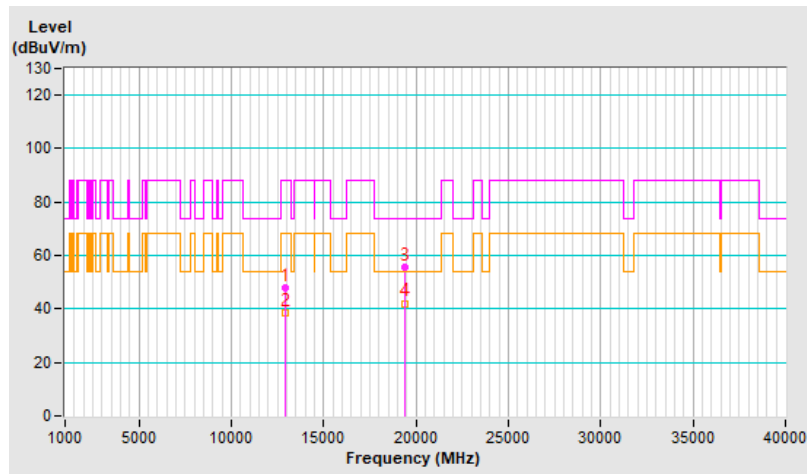


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	49.9 PK	88.2	-38.3	2.92 H	116	33.6	16.3
2	#13090.00	39.5 AV	68.2	-28.7	2.92 H	116	23.2	16.3
3	19635.00	53.5 PK	74.0	-20.5	1.43 H	246	57.2	-3.7
4	19635.00	42.1 AV	54.0	-11.9	1.43 H	246	45.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

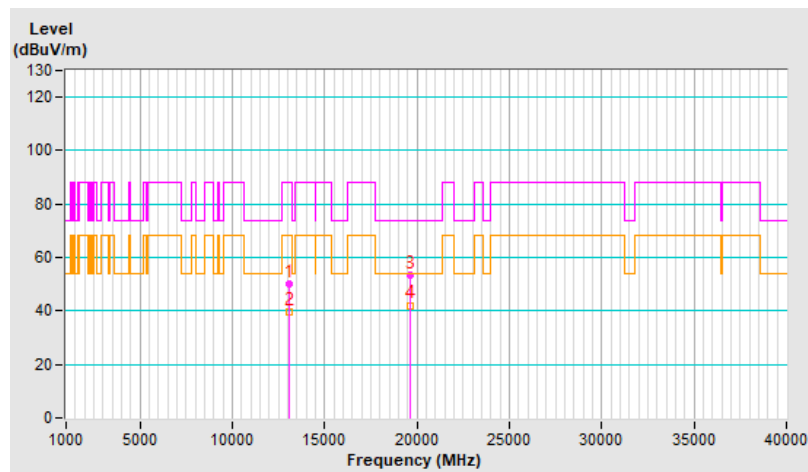


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	47.8 PK	88.2	-40.4	1.99 V	200	31.5	16.3
2	#13090.00	38.3 AV	68.2	-29.9	1.99 V	200	22.0	16.3
3	19635.00	55.2 PK	74.0	-18.8	1.79 V	34	58.9	-3.7
4	19635.00	41.9 AV	54.0	-12.1	1.79 V	34	45.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

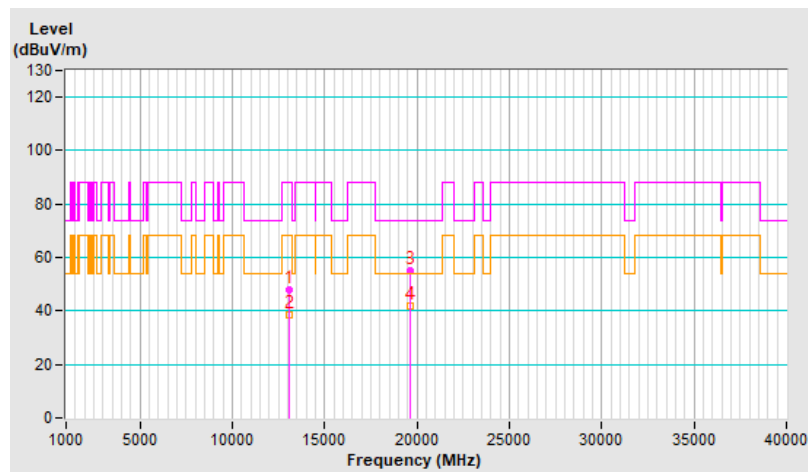


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	49.4 PK	88.2	-38.8	2.90 H	109	31.4	18.0
2	#13410.00	38.5 AV	68.2	-29.7	2.90 H	109	20.5	18.0
3	20115.00	53.8 PK	74.0	-20.2	1.46 H	244	56.8	-3.0
4	20115.00	42.0 AV	54.0	-12.0	1.46 H	244	45.0	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

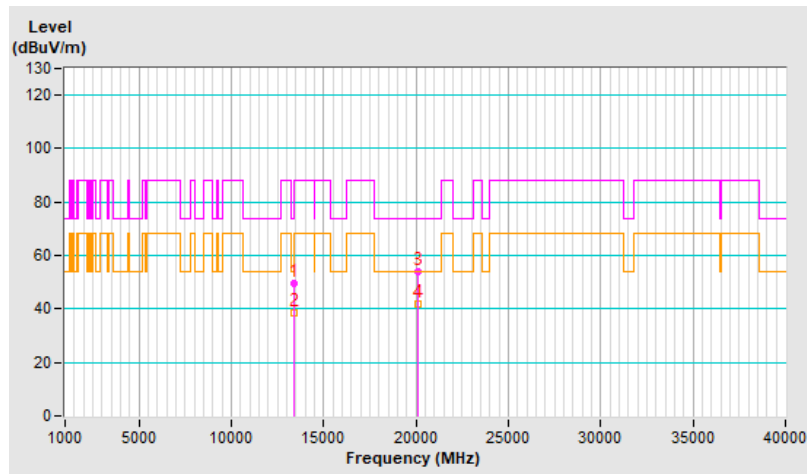


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	47.4 PK	88.2	-40.8	2.06 V	204	29.4	18.0
2	#13410.00	38.1 AV	68.2	-30.1	2.06 V	204	20.1	18.0
3	20115.00	55.6 PK	74.0	-18.4	1.79 V	38	58.6	-3.0
4	20115.00	42.1 AV	54.0	-11.9	1.79 V	38	45.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

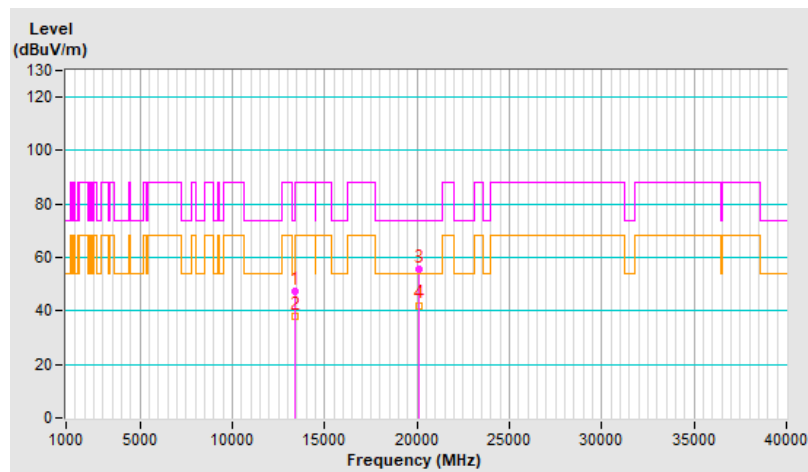


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	49.4 PK	88.2	-38.8	2.90 H	94	30.5	18.9
2	#13730.00	38.5 AV	68.2	-29.7	2.90 H	94	19.6	18.9
3	20595.00	53.8 PK	74.0	-20.2	1.40 H	265	56.7	-2.9
4	20595.00	42.3 AV	54.0	-11.7	1.40 H	265	45.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

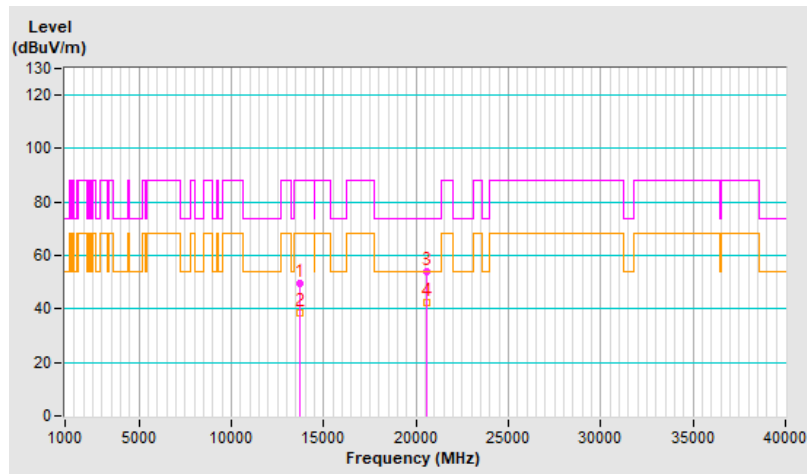


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.4 PK	88.2	-39.8	2.03 V	202	29.5	18.9
2	#13730.00	39.0 AV	68.2	-29.2	2.03 V	202	20.1	18.9
3	20595.00	55.8 PK	74.0	-18.2	1.73 V	51	58.7	-2.9
4	20595.00	42.1 AV	54.0	-11.9	1.73 V	51	45.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

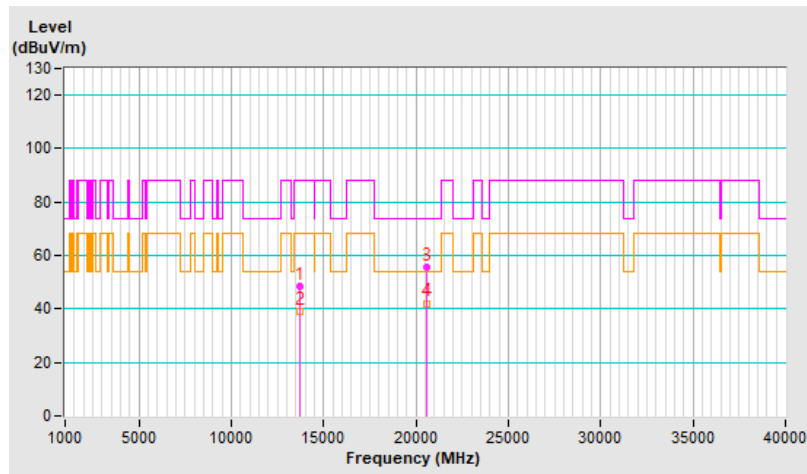


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	49.7 PK	88.2	-38.5	3.01 H	113	31.0	18.7
2	#13890.00	39.2 AV	68.2	-29.0	3.01 H	113	20.5	18.7
3	20835.00	53.5 PK	74.0	-20.5	1.37 H	260	56.0	-2.5
4	20835.00	42.0 AV	54.0	-12.0	1.37 H	260	44.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

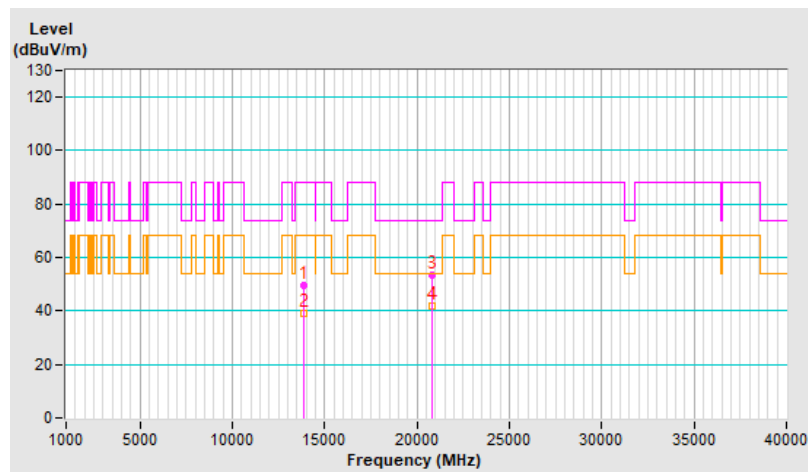


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	48.3 PK	88.2	-39.9	1.99 V	188	29.6	18.7
2	#13890.00	38.9 AV	68.2	-29.3	1.99 V	188	20.2	18.7
3	20835.00	55.7 PK	74.0	-18.3	1.78 V	46	58.2	-2.5
4	20835.00	42.0 AV	54.0	-12.0	1.78 V	46	44.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

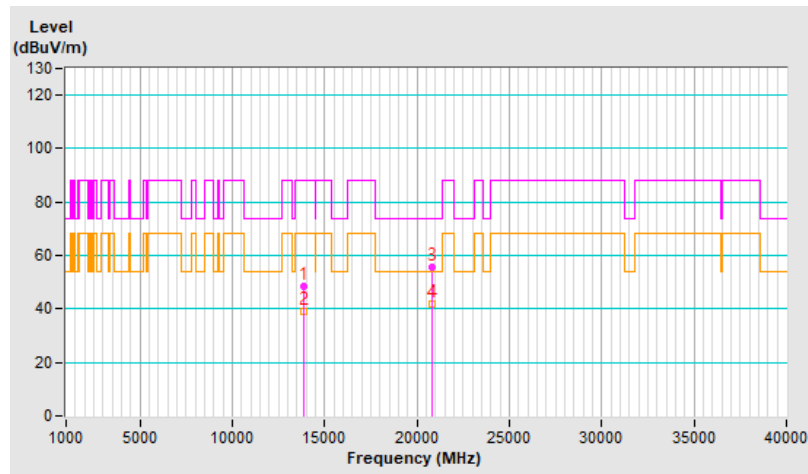


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	49.6 PK	88.2	-38.6	2.97 H	124	30.6	19.0
2	#14050.00	39.1 AV	68.2	-29.1	2.97 H	124	20.1	19.0
3	21075.00	54.6 PK	74.0	-19.4	1.42 H	239	56.4	-1.8
4	21075.00	42.9 AV	54.0	-11.1	1.42 H	239	44.7	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

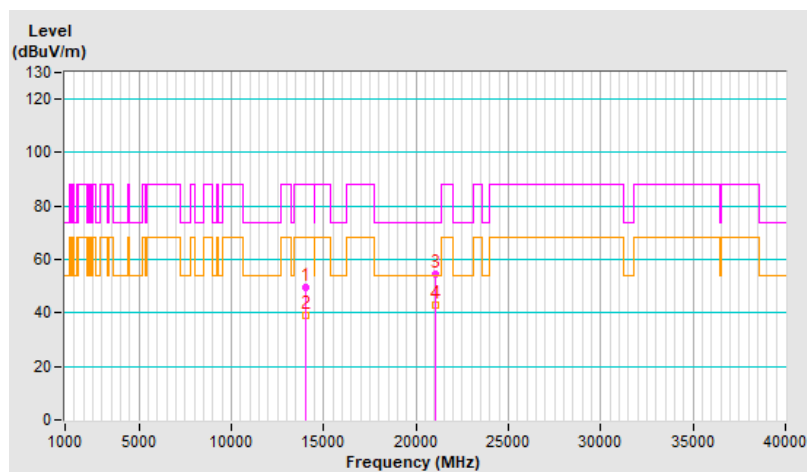


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	47.8 PK	88.2	-40.4	2.07 V	195	28.8	19.0
2	#14050.00	38.6 AV	68.2	-29.6	2.07 V	195	19.6	19.0
3	21075.00	55.6 PK	74.0	-18.4	1.72 V	47	57.4	-1.8
4	21075.00	42.1 AV	54.0	-11.9	1.72 V	47	43.9	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

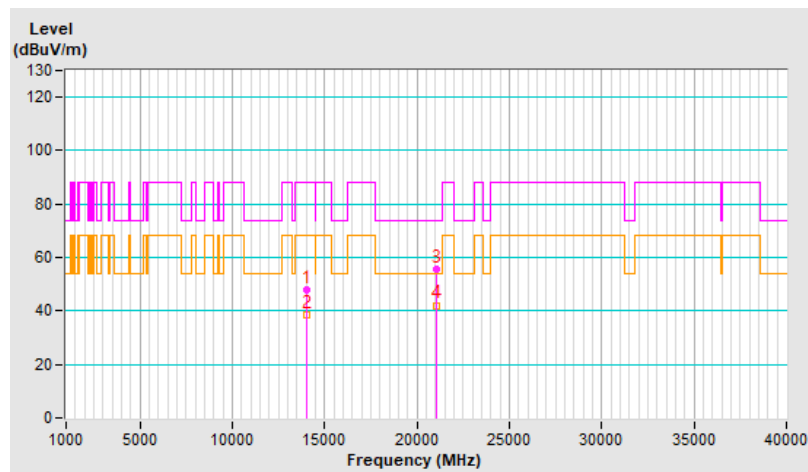


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	50.0 PK	74.0	-24.0	2.94 H	94	33.6	16.4
2	12050.00	39.5 AV	54.0	-14.5	2.94 H	94	23.1	16.4
3	18075.00	54.7 PK	74.0	-19.3	1.43 H	241	58.3	-3.6
4	18075.00	42.8 AV	54.0	-11.2	1.43 H	241	46.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

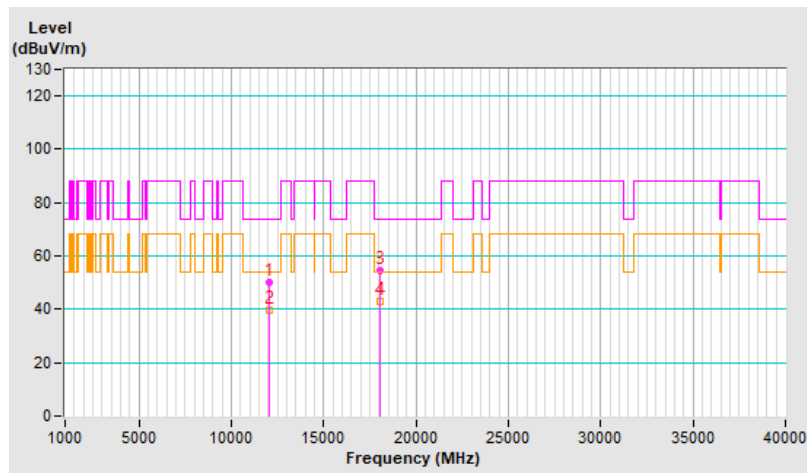


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.6 PK	74.0	-26.4	2.00 V	218	31.2	16.4
2	12050.00	38.0 AV	54.0	-16.0	2.00 V	218	21.6	16.4
3	18075.00	55.8 PK	74.0	-18.2	1.76 V	50	59.4	-3.6
4	18075.00	42.0 AV	54.0	-12.0	1.76 V	50	45.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

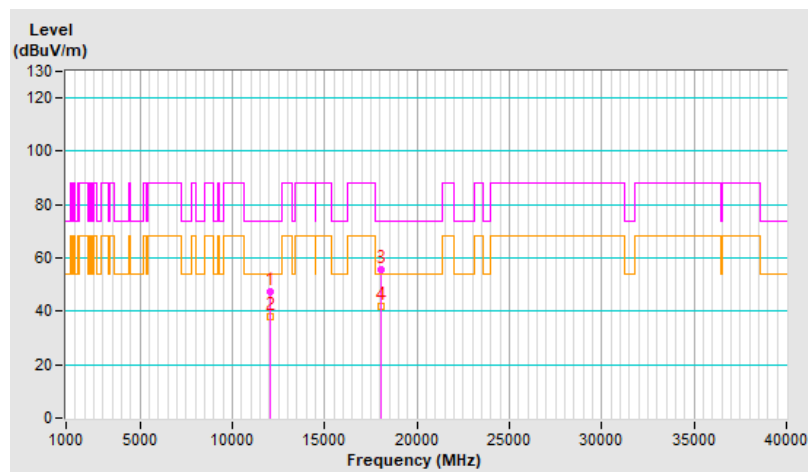


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	49.0 PK	74.0	-25.0	2.97 H	106	33.3	15.7
2	12370.00	38.5 AV	54.0	-15.5	2.97 H	106	22.8	15.7
3	18555.00	54.5 PK	74.0	-19.5	1.48 H	246	58.4	-3.9
4	18555.00	42.9 AV	54.0	-11.1	1.48 H	246	46.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

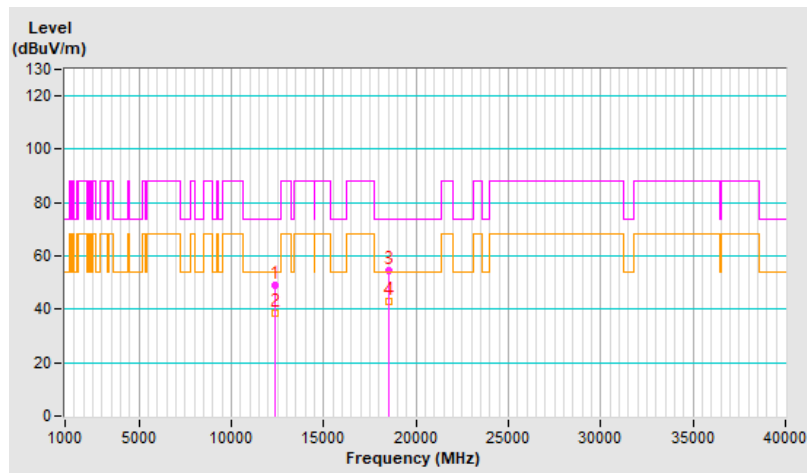


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	47.3 PK	74.0	-26.7	2.07 V	193	31.6	15.7
2	12370.00	38.0 AV	54.0	-16.0	2.07 V	193	22.3	15.7
3	18555.00	55.8 PK	74.0	-18.2	1.71 V	59	59.7	-3.9
4	18555.00	42.5 AV	54.0	-11.5	1.71 V	59	46.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

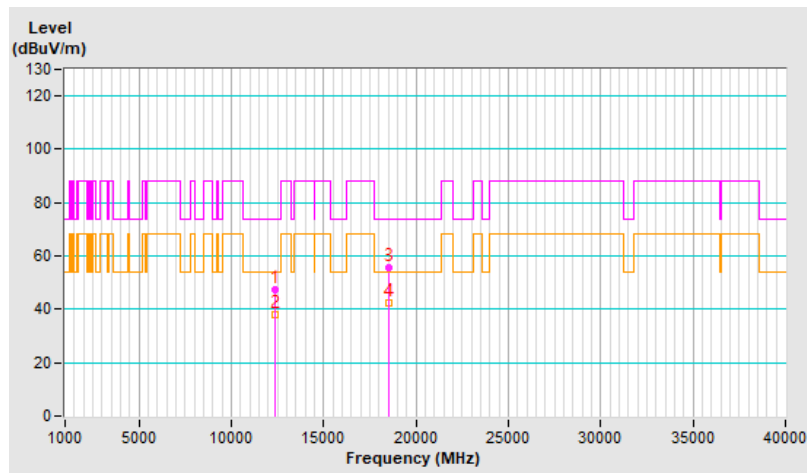


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	49.3 PK	74.0	-24.7	2.96 H	123	34.0	15.3
2	12690.00	38.5 AV	54.0	-15.5	2.96 H	123	23.2	15.3
3	19035.00	54.0 PK	74.0	-20.0	1.45 H	243	57.2	-3.2
4	19035.00	42.5 AV	54.0	-11.5	1.45 H	243	45.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

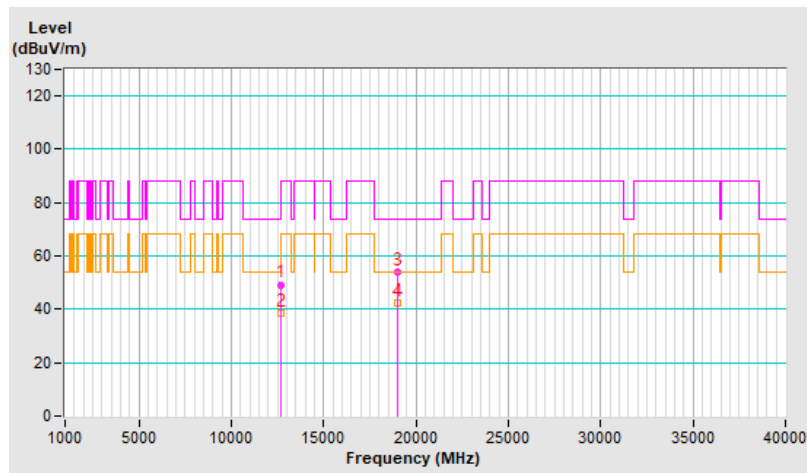


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	48.2 PK	74.0	-25.8	2.09 V	204	32.9	15.3
2	12690.00	38.9 AV	54.0	-15.1	2.09 V	204	23.6	15.3
3	19035.00	56.2 PK	74.0	-17.8	1.76 V	54	59.4	-3.2
4	19035.00	42.6 AV	54.0	-11.4	1.76 V	54	45.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

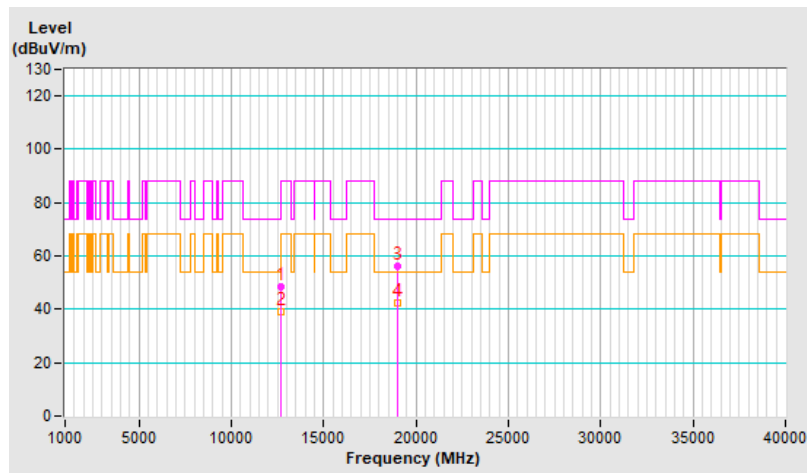


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	49.4 PK	88.2	-38.8	3.00 H	110	33.1	16.3
2	#13010.00	38.7 AV	68.2	-29.5	3.00 H	110	22.4	16.3
3	19515.00	54.6 PK	74.0	-19.4	1.48 H	238	58.4	-3.8
4	19515.00	42.9 AV	54.0	-11.1	1.48 H	238	46.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

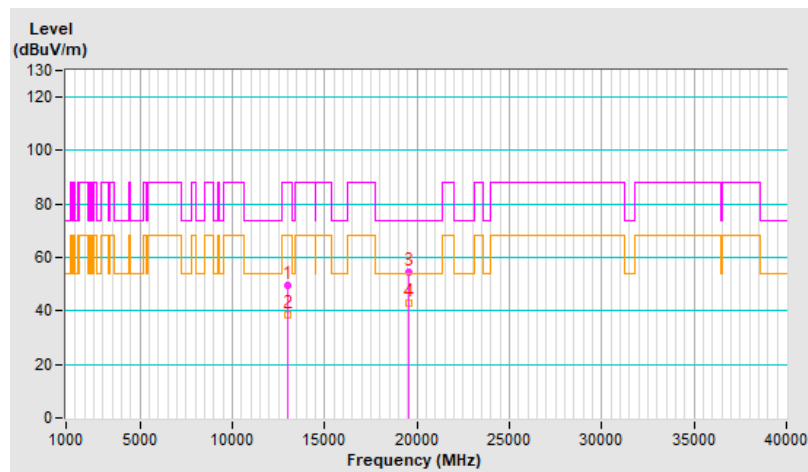


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.9 PK	88.2	-40.3	1.99 V	213	31.6	16.3
2	#13010.00	38.2 AV	68.2	-30.0	1.99 V	213	21.9	16.3
3	19515.00	55.2 PK	74.0	-18.8	1.73 V	39	59.0	-3.8
4	19515.00	41.9 AV	54.0	-12.1	1.73 V	39	45.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

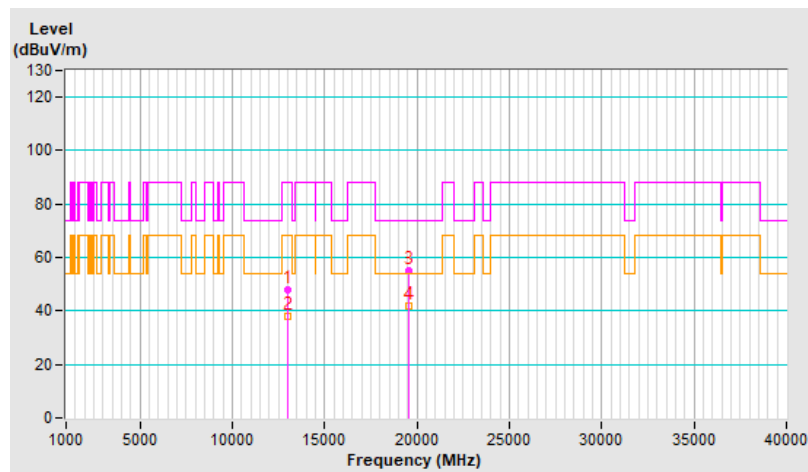


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	49.3 PK	74.0	-24.7	2.92 H	111	31.5	17.8
2	13330.00	38.8 AV	54.0	-15.2	2.92 H	111	21.0	17.8
3	19995.00	54.1 PK	74.0	-19.9	1.39 H	246	57.3	-3.2
4	19995.00	42.3 AV	54.0	-11.7	1.39 H	246	45.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

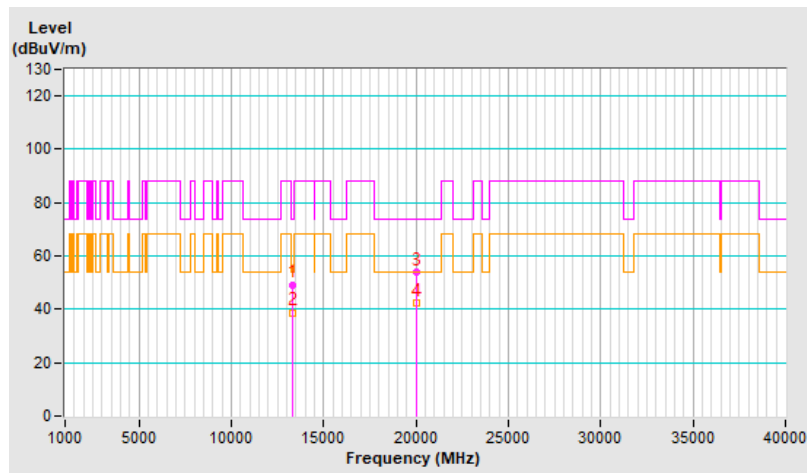


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.1 PK	74.0	-25.9	2.08 V	188	30.3	17.8
2	13330.00	38.5 AV	54.0	-15.5	2.08 V	188	20.7	17.8
3	19995.00	55.4 PK	74.0	-18.6	1.74 V	55	58.6	-3.2
4	19995.00	41.8 AV	54.0	-12.2	1.74 V	55	45.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

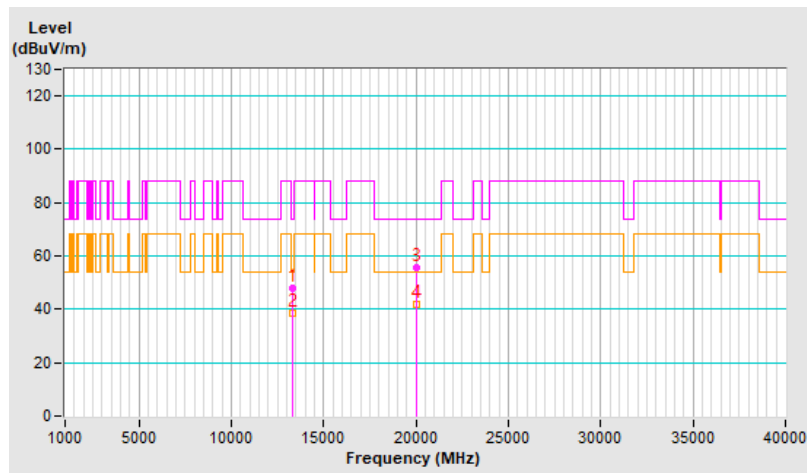


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	50.3 PK	88.2	-37.9	2.90 H	98	31.3	19.0
2	#13650.00	39.4 AV	68.2	-28.8	2.90 H	98	20.4	19.0
3	20475.00	54.0 PK	74.0	-20.0	1.48 H	241	56.5	-2.5
4	20475.00	42.5 AV	54.0	-11.5	1.48 H	241	45.0	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

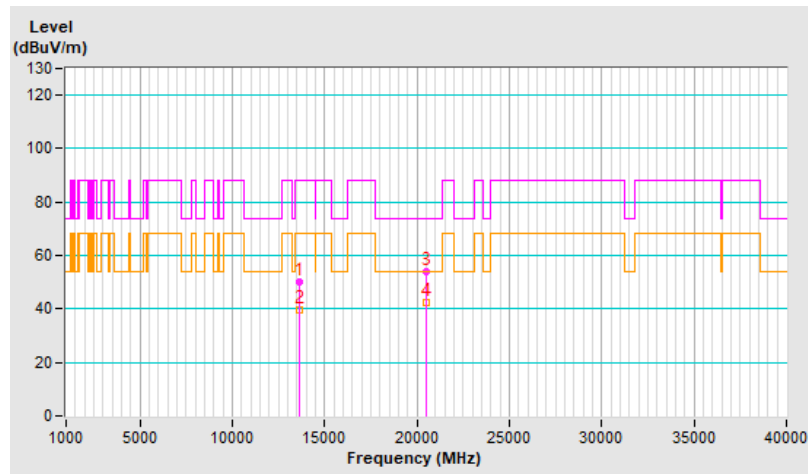


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	48.3 PK	88.2	-39.9	2.02 V	207	29.3	19.0
2	#13650.00	38.7 AV	68.2	-29.5	2.02 V	207	19.7	19.0
3	20475.00	55.9 PK	74.0	-18.1	1.74 V	41	58.4	-2.5
4	20475.00	42.1 AV	54.0	-11.9	1.74 V	41	44.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

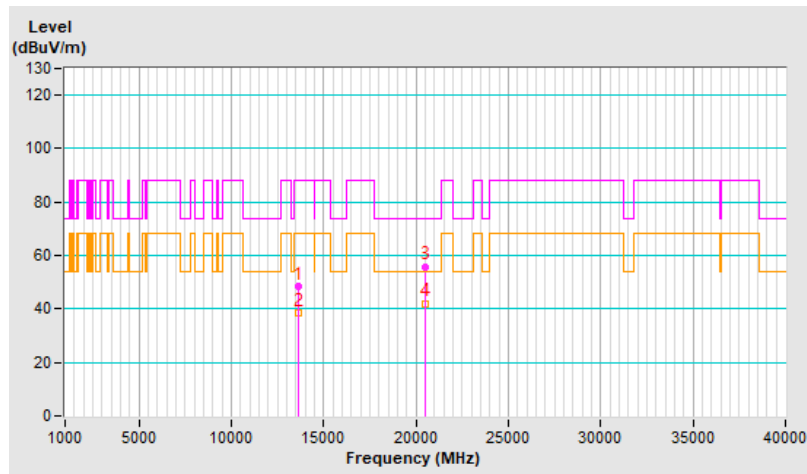


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	49.4 PK	88.2	-38.8	2.91 H	95	30.5	18.9
2	#13970.00	38.5 AV	68.2	-29.7	2.91 H	95	19.6	18.9
3	20955.00	54.1 PK	74.0	-19.9	1.45 H	243	56.4	-2.3
4	20955.00	42.2 AV	54.0	-11.8	1.45 H	243	44.5	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

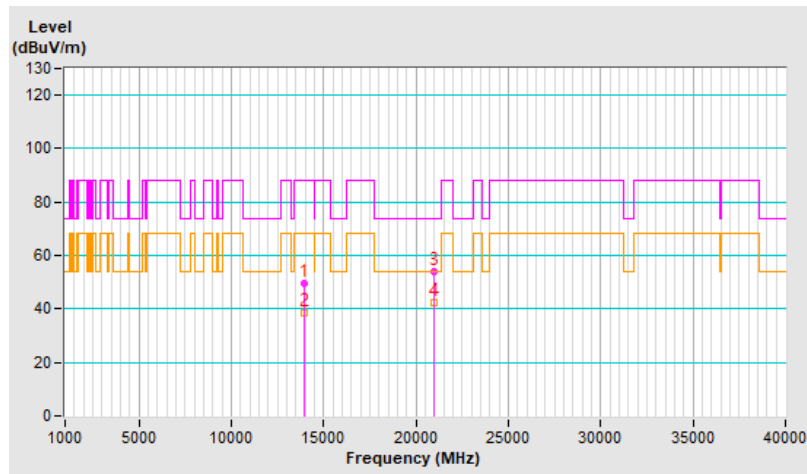


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	47.6 PK	88.2	-40.6	2.09 V	210	28.7	18.9
2	#13970.00	38.0 AV	68.2	-30.2	2.09 V	210	19.1	18.9
3	20955.00	55.5 PK	74.0	-18.5	1.78 V	44	57.8	-2.3
4	20955.00	42.3 AV	54.0	-11.7	1.78 V	44	44.6	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

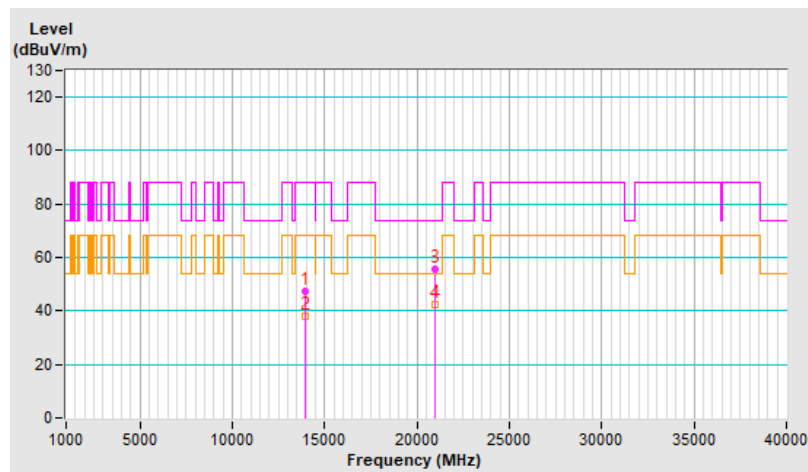


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	49.2 PK	74.0	-24.8	3.05 H	114	33.3	15.9
2	11910.00	38.3 AV	54.0	-15.7	3.05 H	114	22.4	15.9
3	17865.00	51.8 PK	74.0	-22.2	1.64 H	178	24.5	27.3
4	17865.00	42.0 AV	54.0	-12.0	1.64 H	178	14.7	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

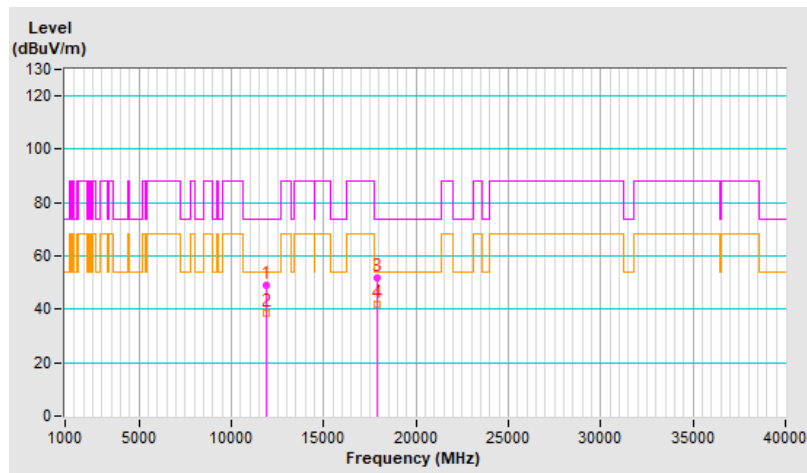


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	2.00 V	160	32.0	15.9
2	11910.00	37.6 AV	54.0	-16.4	2.00 V	160	21.7	15.9
3	17865.00	52.1 PK	74.0	-21.9	1.60 V	58	24.8	27.3
4	17865.00	41.7 AV	54.0	-12.3	1.60 V	58	14.4	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

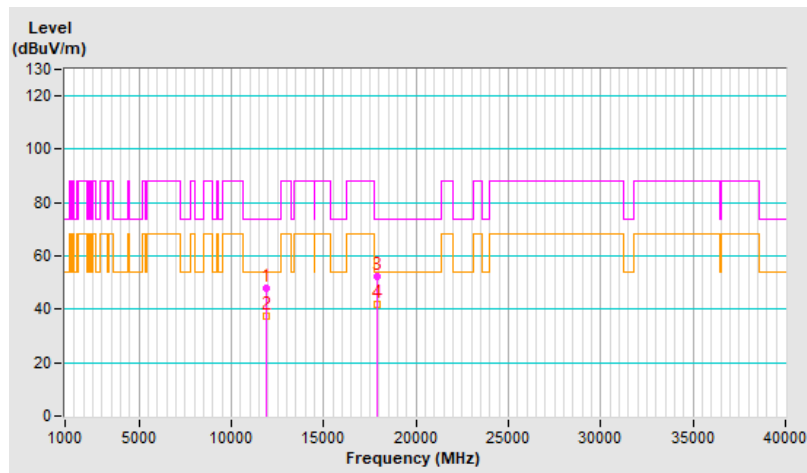


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	48.2 PK	88.2	-40.0	2.96 H	103	32.2	16.0
2	#12830.00	37.8 AV	68.2	-30.4	2.96 H	103	21.8	16.0
3	19245.00	51.1 PK	74.0	-22.9	1.64 H	194	54.2	-3.1
4	19245.00	41.4 AV	54.0	-12.6	1.64 H	194	44.5	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

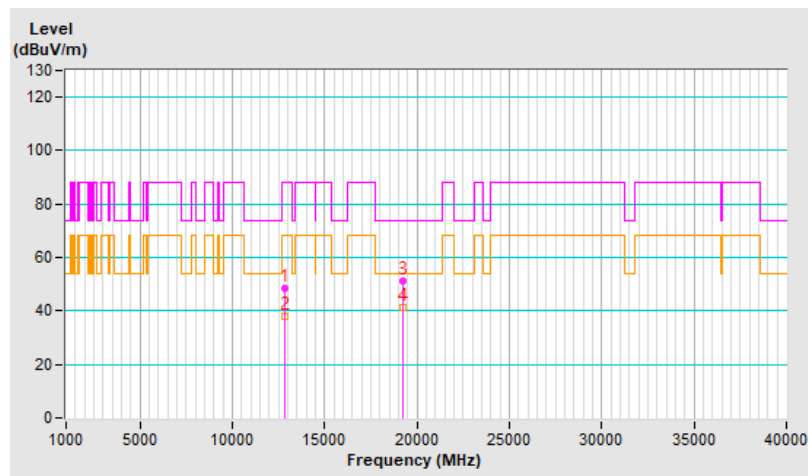




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.99 V	147	32.3	16.0
2	#12830.00	37.9 AV	68.2	-30.3	1.99 V	147	21.9	16.0
3	19245.00	51.7 PK	74.0	-22.3	1.55 V	74	54.8	-3.1
4	19245.00	41.4 AV	54.0	-12.6	1.55 V	74	44.5	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

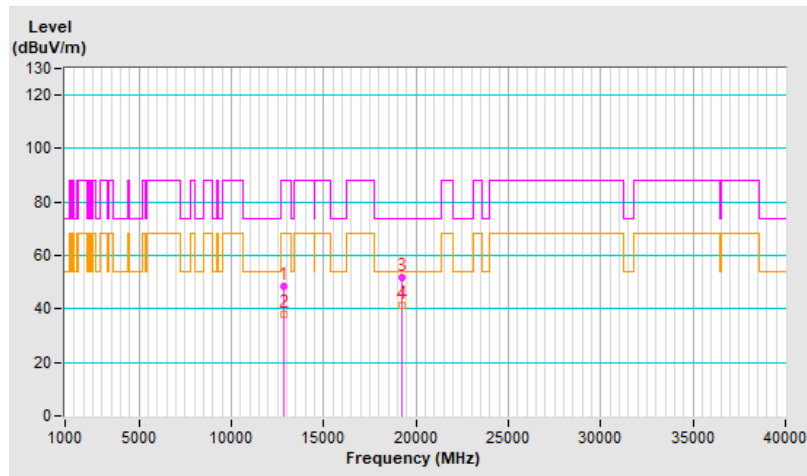


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	3.04 H	88	32.6	16.2
2	#12870.00	38.0 AV	68.2	-30.2	3.04 H	88	21.8	16.2
3	19305.00	51.2 PK	74.0	-22.8	1.57 H	183	54.2	-3.0
4	19305.00	41.6 AV	54.0	-12.4	1.57 H	183	44.6	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

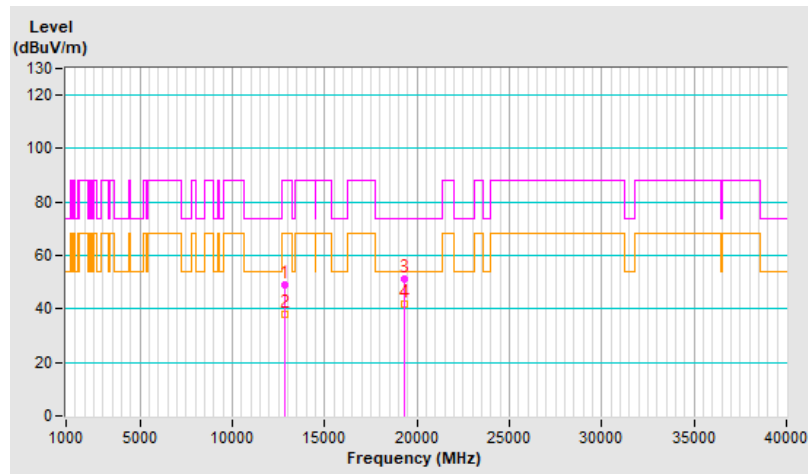


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	47.8 PK	88.2	-40.4	2.02 V	155	31.6	16.2
2	#12870.00	37.8 AV	68.2	-30.4	2.02 V	155	21.6	16.2
3	19305.00	52.5 PK	74.0	-21.5	1.58 V	67	55.5	-3.0
4	19305.00	42.2 AV	54.0	-11.8	1.58 V	67	45.2	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

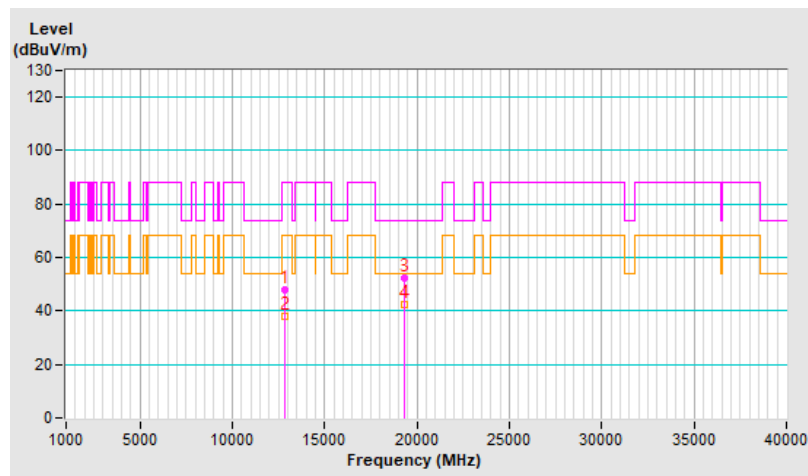


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	48.4 PK	88.2	-39.8	2.98 H	89	32.1	16.3
2	#13030.00	37.6 AV	68.2	-30.6	2.98 H	89	21.3	16.3
3	19545.00	51.4 PK	74.0	-22.6	1.59 H	176	55.3	-3.9
4	19545.00	41.7 AV	54.0	-12.3	1.59 H	176	45.6	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

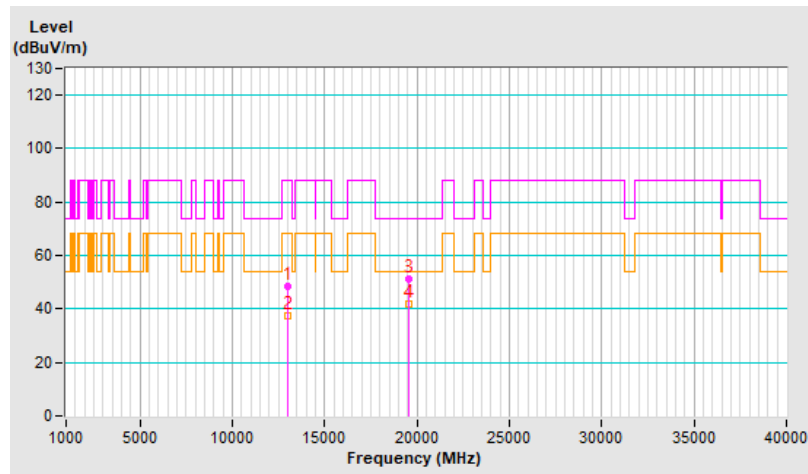


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.2 PK	88.2	-41.0	2.00 V	165	30.9	16.3
2	#13030.00	37.1 AV	68.2	-31.1	2.00 V	165	20.8	16.3
3	19545.00	52.0 PK	74.0	-22.0	1.65 V	43	55.9	-3.9
4	19545.00	41.3 AV	54.0	-12.7	1.65 V	43	45.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

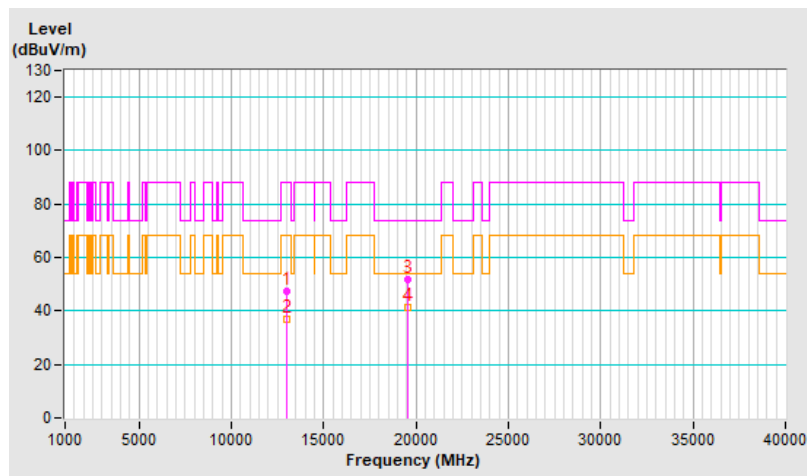


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	2.97 H	119	32.4	16.3
2	#13070.00	37.9 AV	68.2	-30.3	2.97 H	119	21.6	16.3
3	19605.00	50.9 PK	74.0	-23.1	1.62 H	193	54.9	-4.0
4	19605.00	41.2 AV	54.0	-12.8	1.62 H	193	45.2	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

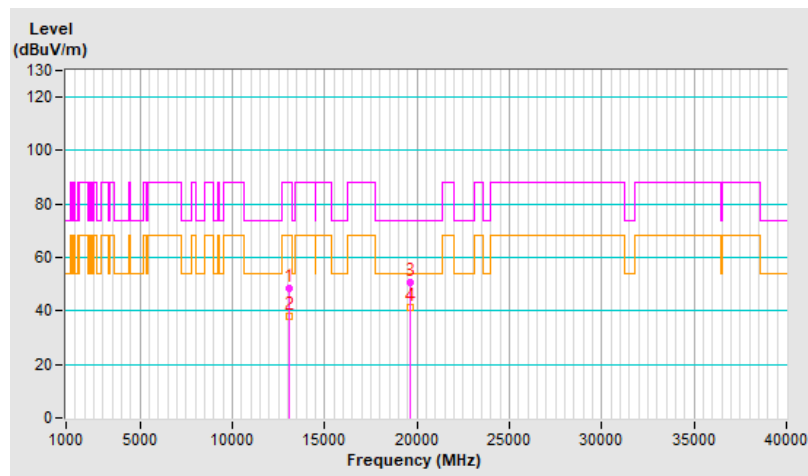


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	47.5 PK	88.2	-40.7	2.02 V	165	31.2	16.3
2	#13070.00	37.2 AV	68.2	-31.0	2.02 V	165	20.9	16.3
3	19605.00	51.8 PK	74.0	-22.2	1.65 V	64	55.8	-4.0
4	19605.00	41.6 AV	54.0	-12.4	1.65 V	64	45.6	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

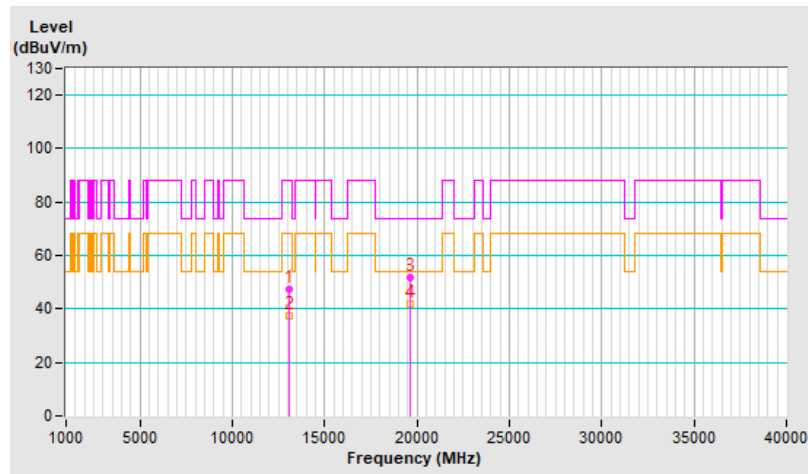


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	48.1 PK	88.2	-40.1	2.99 H	96	29.2	18.9
2	#13750.00	37.7 AV	68.2	-30.5	2.99 H	96	18.8	18.9
3	20625.00	51.5 PK	74.0	-22.5	1.56 H	169	54.4	-2.9
4	20625.00	41.8 AV	54.0	-12.2	1.56 H	169	44.7	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

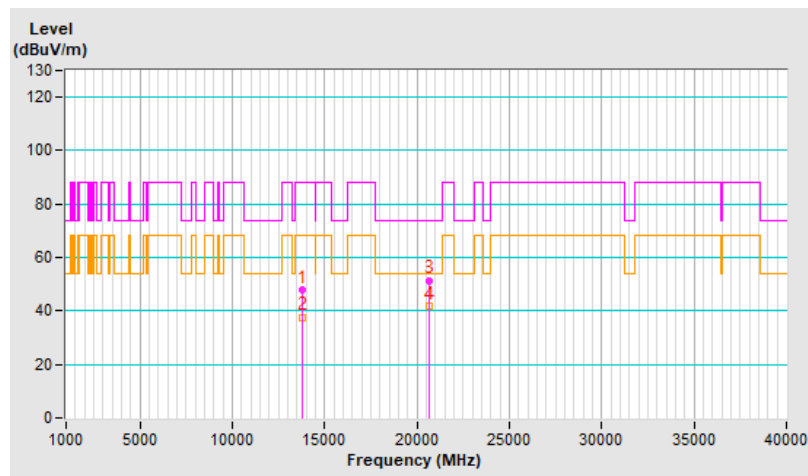


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	48.6 PK	88.2	-39.6	1.93 V	162	29.7	18.9
2	#13750.00	37.9 AV	68.2	-30.3	1.93 V	162	19.0	18.9
3	20625.00	53.2 PK	74.0	-20.8	1.63 V	43	56.1	-2.9
4	20625.00	42.8 AV	54.0	-11.2	1.63 V	43	45.7	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

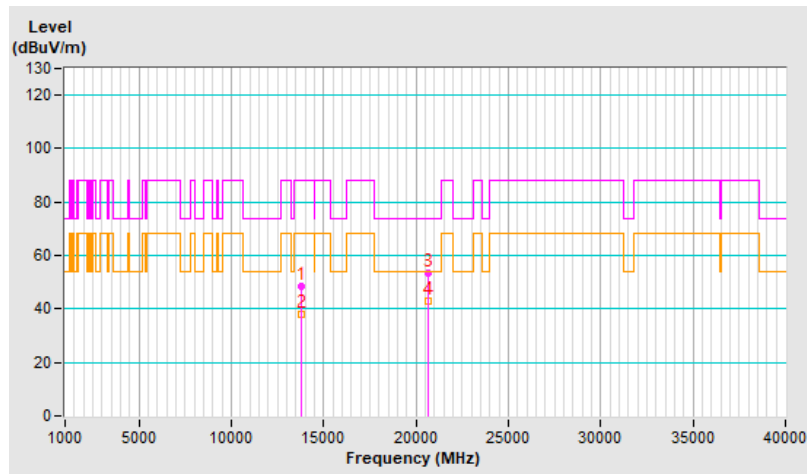


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	3.00 H	108	29.4	18.9
2	#13990.00	37.7 AV	68.2	-30.5	3.00 H	108	18.8	18.9
3	20985.00	51.2 PK	74.0	-22.8	1.57 H	185	53.2	-2.0
4	20985.00	41.3 AV	54.0	-12.7	1.57 H	185	43.3	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

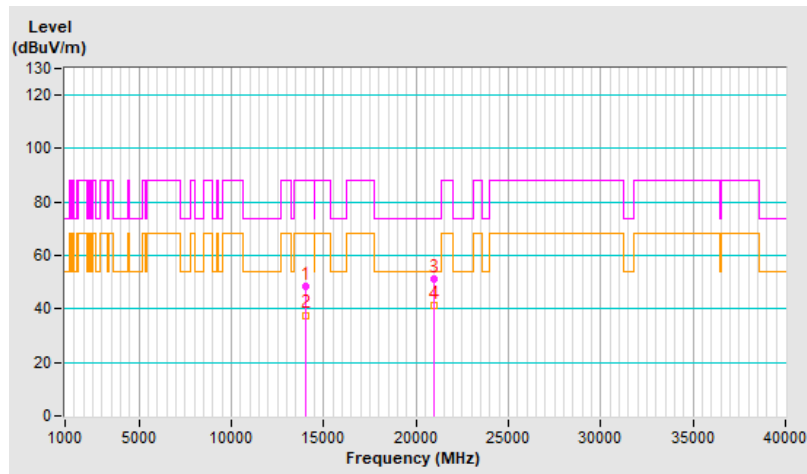


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.8 PK	88.2	-40.4	1.95 V	158	28.9	18.9
2	#13990.00	37.2 AV	68.2	-31.0	1.95 V	158	18.3	18.9
3	20985.00	52.2 PK	74.0	-21.8	1.64 V	59	54.2	-2.0
4	20985.00	42.0 AV	54.0	-12.0	1.64 V	59	44.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

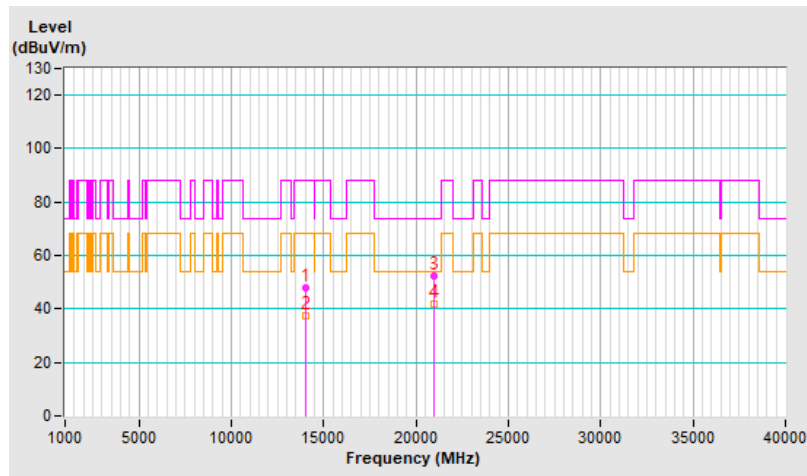


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	48.6 PK	88.2	-39.6	3.01 H	112	29.0	19.6
2	#14230.00	37.7 AV	68.2	-30.5	3.01 H	112	18.1	19.6
3	21345.00	50.8 PK	74.0	-23.2	1.62 H	177	52.5	-1.7
4	21345.00	41.4 AV	54.0	-12.6	1.62 H	177	43.1	-1.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

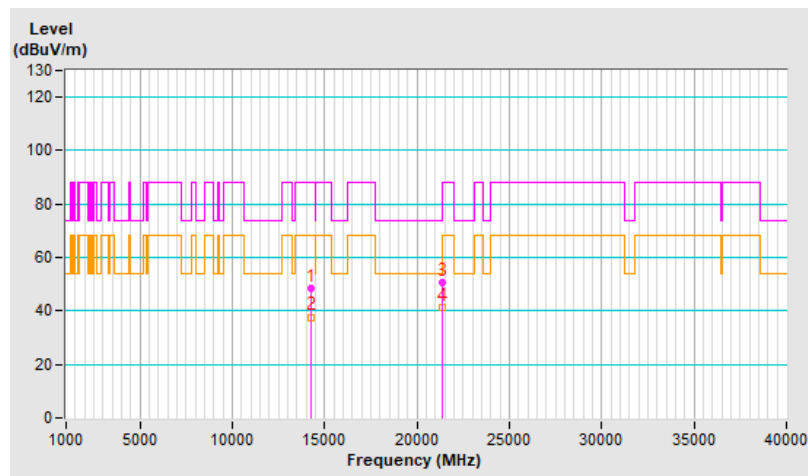


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	48.0 PK	88.2	-40.2	2.00 V	163	28.4	19.6
2	#14230.00	37.8 AV	68.2	-30.4	2.00 V	163	18.2	19.6
3	21345.00	52.0 PK	74.0	-22.0	1.57 V	64	53.7	-1.7
4	21345.00	41.7 AV	54.0	-12.3	1.57 V	64	43.4	-1.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

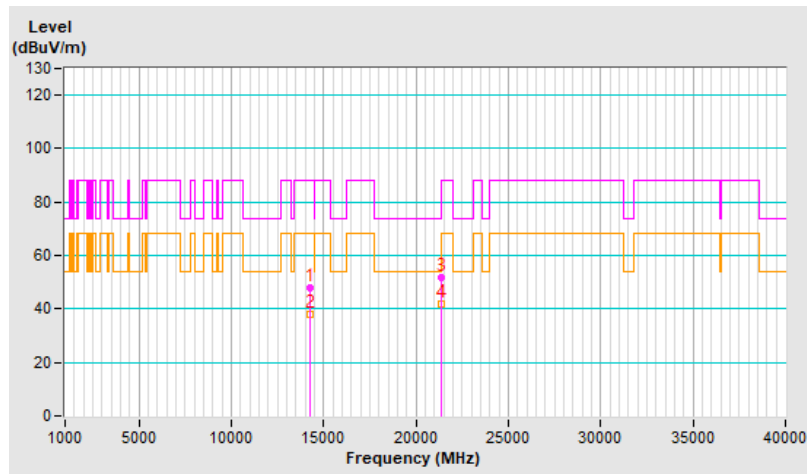


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	2.98 H	96	32.5	15.9
2	11910.00	38.0 AV	54.0	-16.0	2.98 H	96	22.1	15.9
3	17865.00	51.7 PK	74.0	-22.3	1.60 H	195	24.4	27.3
4	17865.00	41.8 AV	54.0	-12.2	1.60 H	195	14.5	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

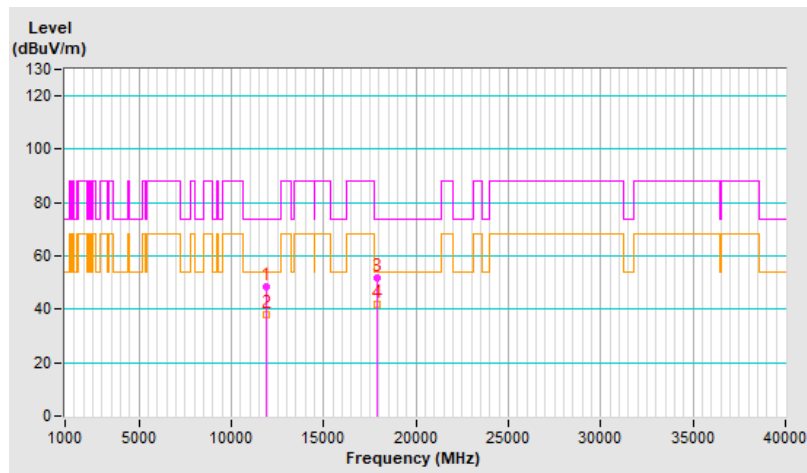


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.9 PK	74.0	-26.1	2.00 V	160	32.0	15.9
2	11910.00	37.6 AV	54.0	-16.4	2.00 V	160	21.7	15.9
3	17865.00	52.1 PK	74.0	-21.9	1.60 V	58	24.8	27.3
4	17865.00	41.7 AV	54.0	-12.3	1.60 V	58	14.4	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

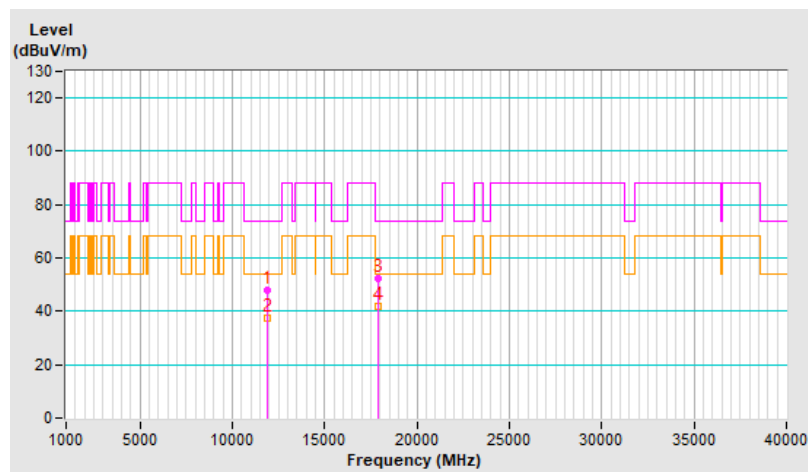


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	2.99 H	111	32.7	16.0
2	#12830.00	37.9 AV	68.2	-30.3	2.99 H	111	21.9	16.0
3	19245.00	51.3 PK	74.0	-22.7	1.56 H	169	54.4	-3.1
4	19245.00	41.7 AV	54.0	-12.3	1.56 H	169	44.8	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

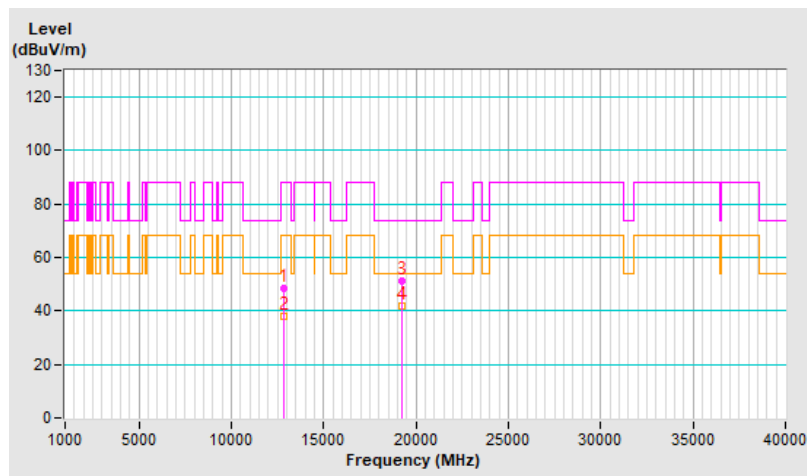


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	47.4 PK	88.2	-40.8	1.97 V	155	31.4	16.0
2	#12830.00	37.1 AV	68.2	-31.1	1.97 V	155	21.1	16.0
3	19245.00	52.1 PK	74.0	-21.9	1.60 V	43	55.2	-3.1
4	19245.00	41.9 AV	54.0	-12.1	1.60 V	43	45.0	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

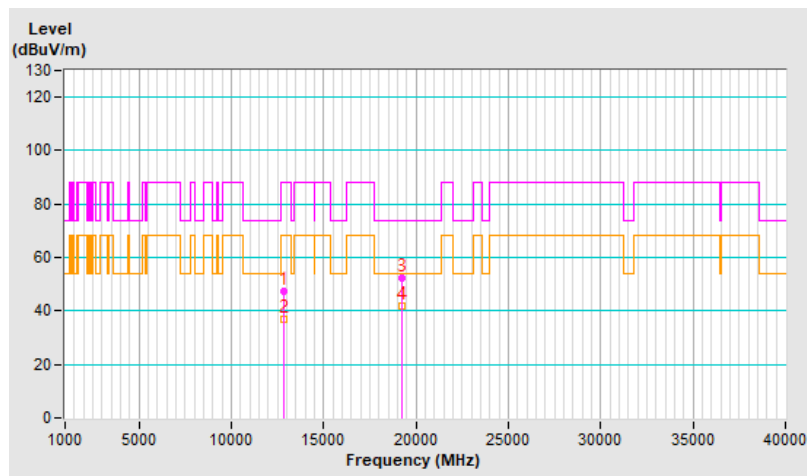


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	3.02 H	100	32.3	16.2
2	#12870.00	37.8 AV	68.2	-30.4	3.02 H	100	21.6	16.2
3	19305.00	51.6 PK	74.0	-22.4	1.62 H	173	54.6	-3.0
4	19305.00	41.7 AV	54.0	-12.3	1.62 H	173	44.7	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

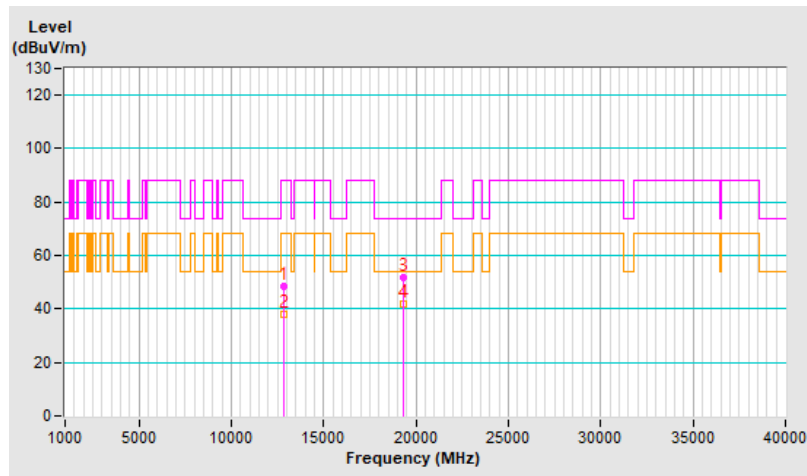


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	47.8 PK	88.2	-40.4	2.00 V	162	31.6	16.2
2	#12870.00	37.8 AV	68.2	-30.4	2.00 V	162	21.6	16.2
3	19305.00	52.6 PK	74.0	-21.4	1.54 V	51	55.6	-3.0
4	19305.00	41.9 AV	54.0	-12.1	1.54 V	51	44.9	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

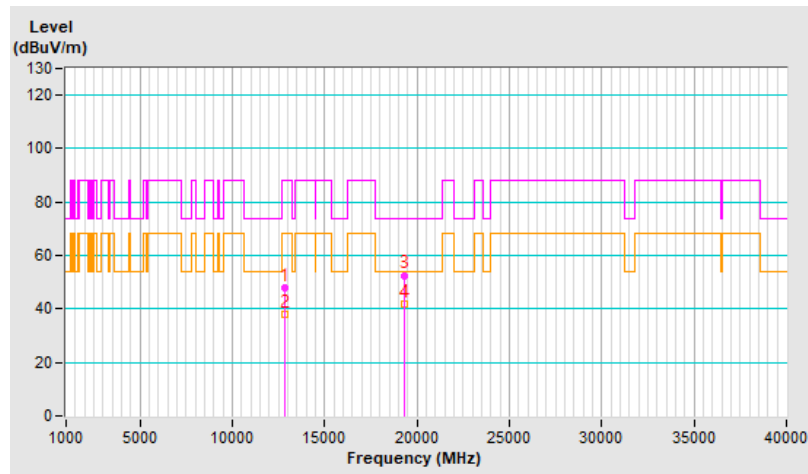


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	3.00 H	112	32.0	16.3
2	#13030.00	37.7 AV	68.2	-30.5	3.00 H	112	21.4	16.3
3	19545.00	51.3 PK	74.0	-22.7	1.55 H	194	55.2	-3.9
4	19545.00	41.8 AV	54.0	-12.2	1.55 H	194	45.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

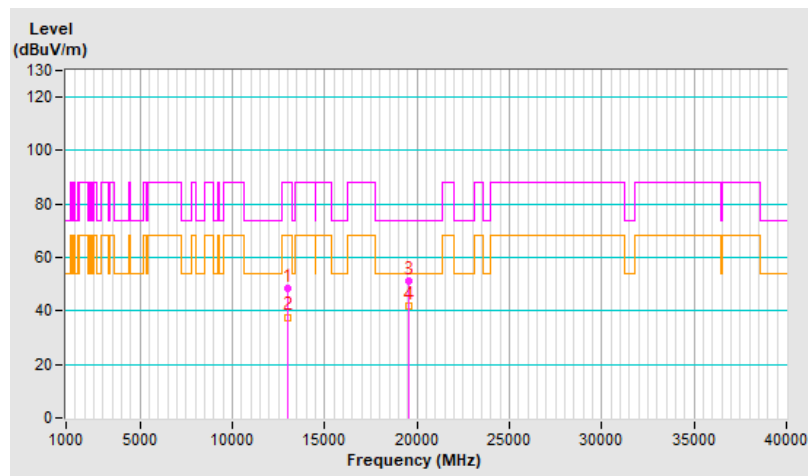




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.8 PK	88.2	-40.4	2.04 V	160	31.5	16.3
2	#13030.00	37.3 AV	68.2	-30.9	2.04 V	160	21.0	16.3
3	19545.00	52.4 PK	74.0	-21.6	1.55 V	54	56.3	-3.9
4	19545.00	41.8 AV	54.0	-12.2	1.55 V	54	45.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

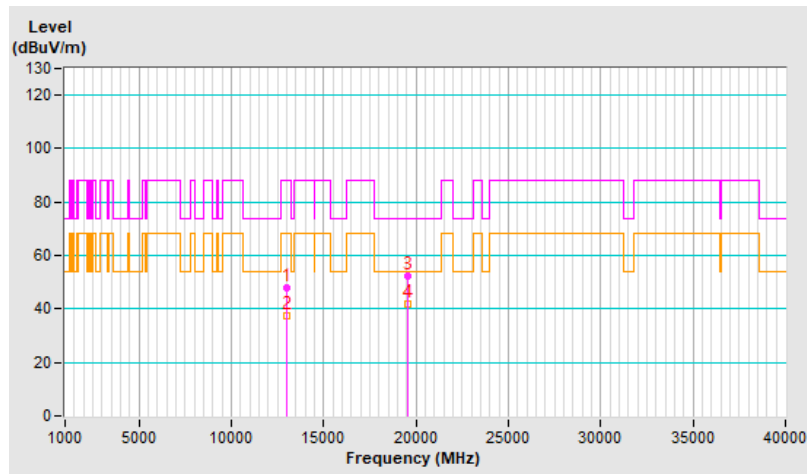


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	3.01 H	118	32.4	16.3
2	#13070.00	38.2 AV	68.2	-30.0	3.01 H	118	21.9	16.3
3	19605.00	51.0 PK	74.0	-23.0	1.64 H	182	55.0	-4.0
4	19605.00	41.5 AV	54.0	-12.5	1.64 H	182	45.5	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

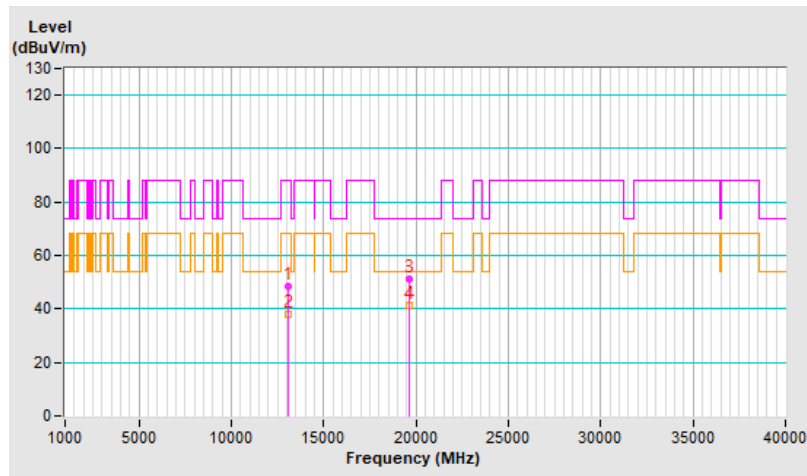




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	1.95 V	158	31.5	16.3
2	#13070.00	37.6 AV	68.2	-30.6	1.95 V	158	21.3	16.3
3	19605.00	51.7 PK	74.0	-22.3	1.66 V	64	55.7	-4.0
4	19605.00	41.6 AV	54.0	-12.4	1.66 V	64	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

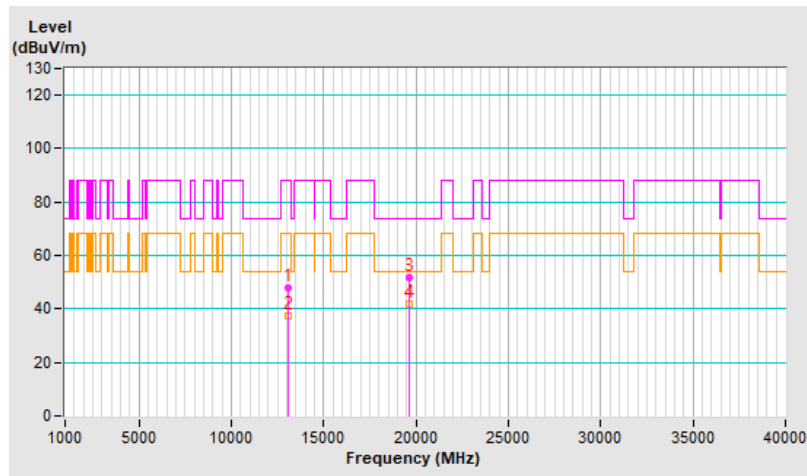


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.2 PK	88.2	-39.0	2.97 H	97	30.3	18.9
2	#13750.00	38.4 AV	68.2	-29.8	2.97 H	97	19.5	18.9
3	20625.00	50.9 PK	74.0	-23.1	1.58 H	190	53.8	-2.9
4	20625.00	41.5 AV	54.0	-12.5	1.58 H	190	44.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

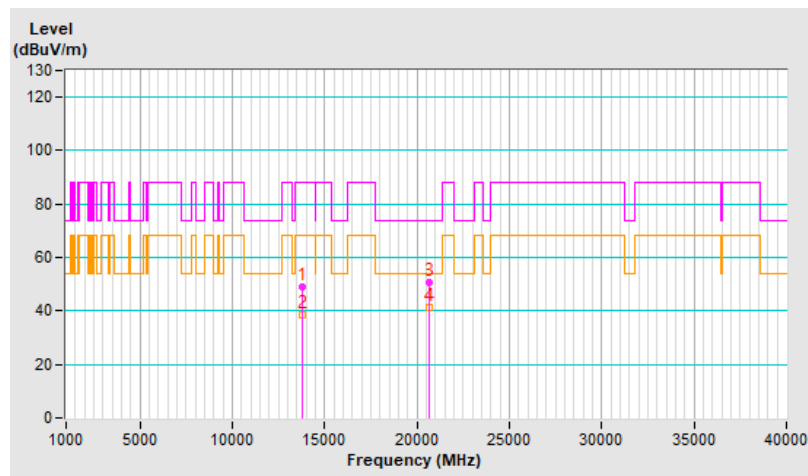


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	48.3 PK	88.2	-39.9	2.02 V	153	29.4	18.9
2	#13750.00	37.8 AV	68.2	-30.4	2.02 V	153	18.9	18.9
3	20625.00	51.5 PK	74.0	-22.5	1.61 V	61	54.4	-2.9
4	20625.00	41.3 AV	54.0	-12.7	1.61 V	61	44.2	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

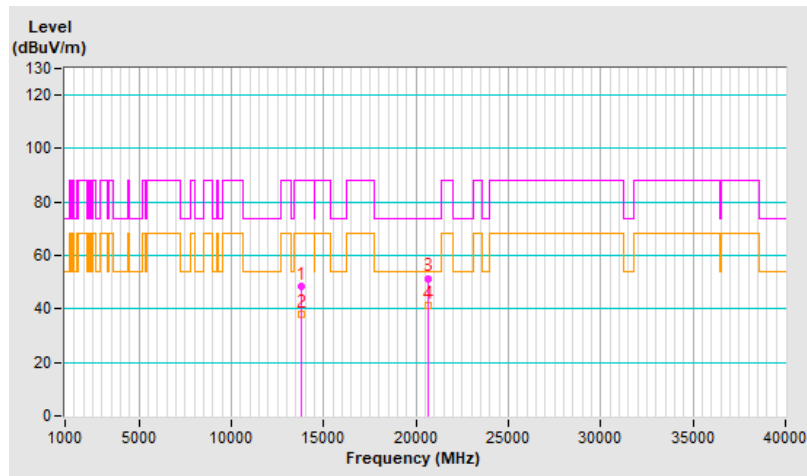


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	2.95 H	112	30.0	18.9
2	#13990.00	37.9 AV	68.2	-30.3	2.95 H	112	19.0	18.9
3	20985.00	51.1 PK	74.0	-22.9	1.60 H	183	53.1	-2.0
4	20985.00	41.6 AV	54.0	-12.4	1.60 H	183	43.6	-2.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

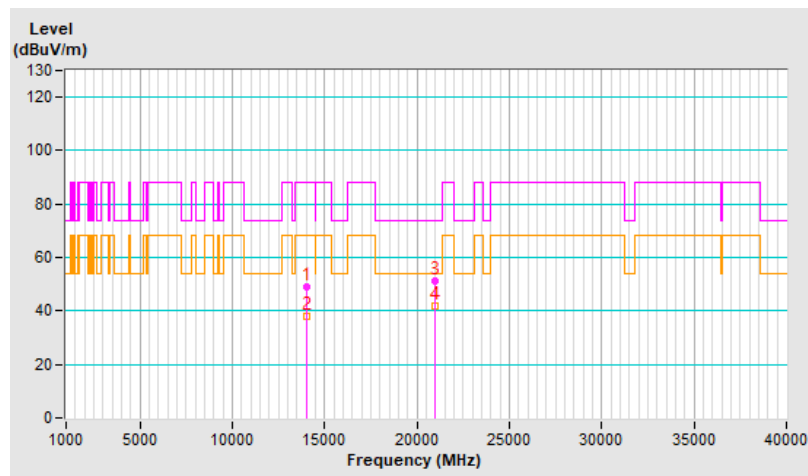


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.7 PK	88.2	-40.5	2.05 V	169	28.8	18.9
2	#13990.00	37.2 AV	68.2	-31.0	2.05 V	169	18.3	18.9
3	20985.00	52.3 PK	74.0	-21.7	1.58 V	63	54.3	-2.0
4	20985.00	41.6 AV	54.0	-12.4	1.58 V	63	43.6	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

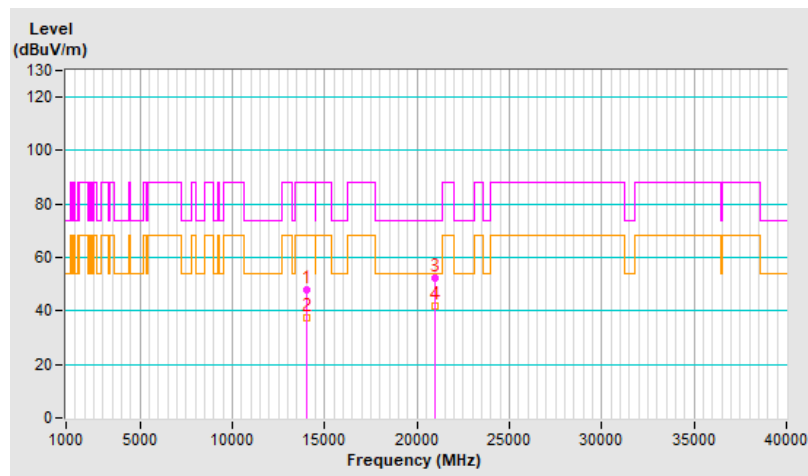


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.6 PK	88.2	-39.6	2.99 H	110	29.0	19.6
2	#14230.00	37.8 AV	68.2	-30.4	2.99 H	110	18.2	19.6
3	21345.00	51.6 PK	74.0	-22.4	1.60 H	184	53.3	-1.7
4	21345.00	42.0 AV	54.0	-12.0	1.60 H	184	43.7	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

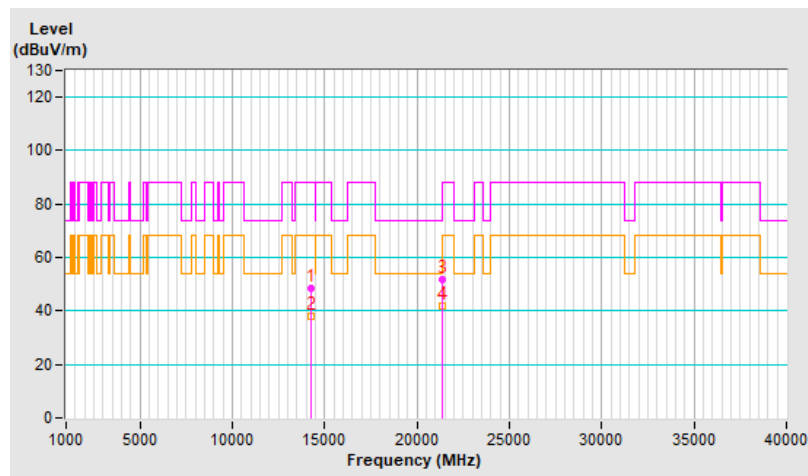




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	48.1 PK	88.2	-40.1	2.03 V	159	28.5	19.6
2	#14230.00	37.8 AV	68.2	-30.4	2.03 V	159	18.2	19.6
3	21345.00	52.4 PK	74.0	-21.6	1.58 V	48	54.1	-1.7
4	21345.00	42.0 AV	54.0	-12.0	1.58 V	48	43.7	-1.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

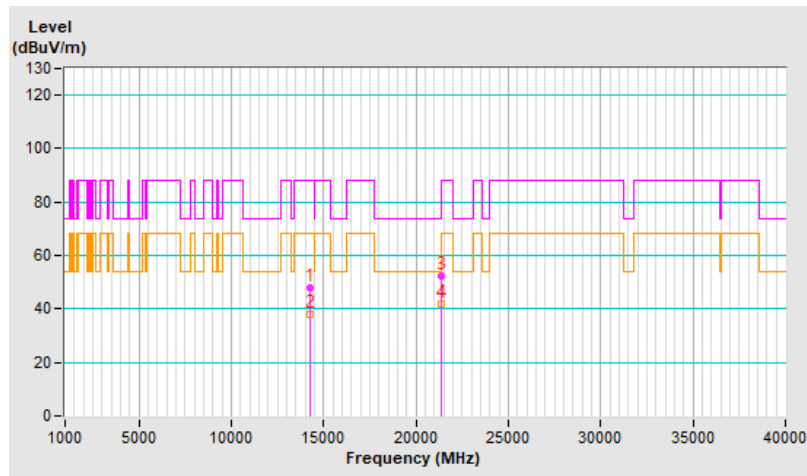


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.6 PK	74.0	-25.4	2.96 H	91	32.7	15.9
2	11910.00	38.1 AV	54.0	-15.9	2.96 H	91	22.2	15.9
3	17865.00	50.8 PK	74.0	-23.2	1.55 H	183	23.5	27.3
4	17865.00	41.3 AV	54.0	-12.7	1.55 H	183	14.0	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

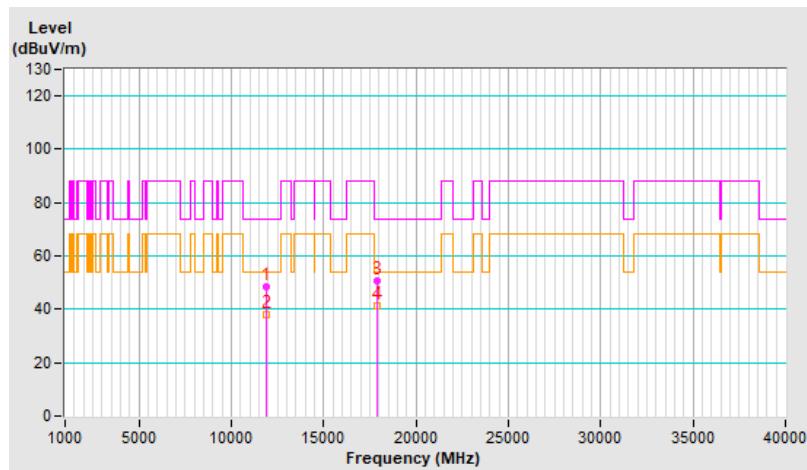


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.3 PK	74.0	-26.7	2.00 V	161	31.4	15.9
2	11910.00	37.1 AV	54.0	-16.9	2.00 V	161	21.2	15.9
3	17865.00	52.0 PK	74.0	-22.0	1.62 V	56	24.7	27.3
4	17865.00	41.8 AV	54.0	-12.2	1.62 V	56	14.5	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

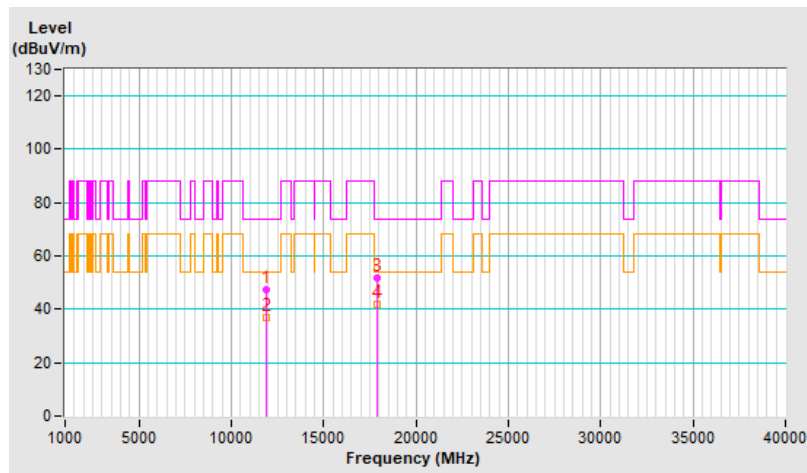


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	48.7 PK	88.2	-39.5	3.03 H	113	32.7	16.0
2	#12830.00	38.3 AV	68.2	-29.9	3.03 H	113	22.3	16.0
3	19245.00	51.0 PK	74.0	-23.0	1.62 H	176	54.1	-3.1
4	19245.00	41.5 AV	54.0	-12.5	1.62 H	176	44.6	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

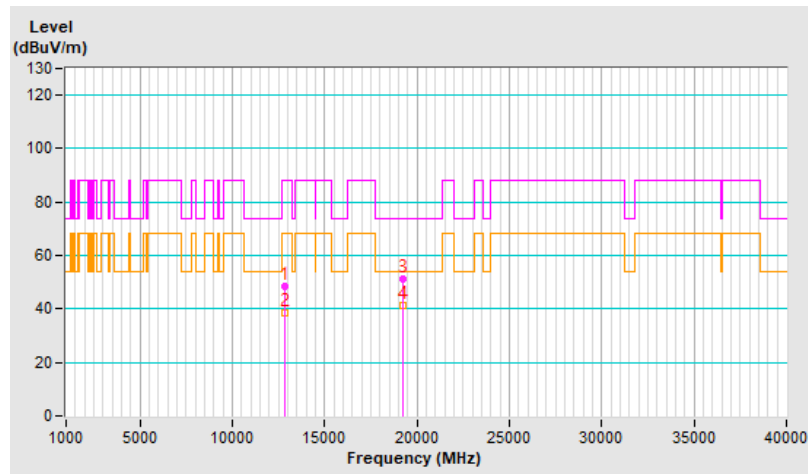


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.5 PK	88.2	-40.7	2.02 V	151	31.5	16.0
2	#12830.00	37.2 AV	68.2	-31.0	2.02 V	151	21.2	16.0
3	19245.00	52.2 PK	74.0	-21.8	1.58 V	69	55.3	-3.1
4	19245.00	42.0 AV	54.0	-12.0	1.58 V	69	45.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

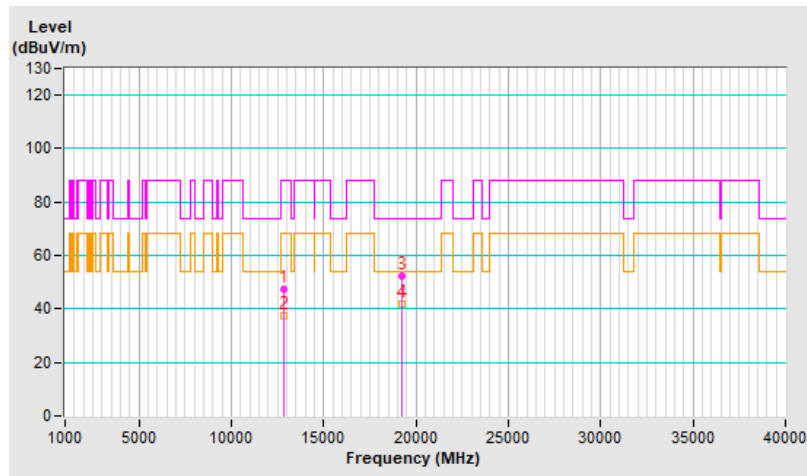


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.5 PK	88.2	-39.7	3.02 H	102	32.3	16.2
2	#12870.00	37.9 AV	68.2	-30.3	3.02 H	102	21.7	16.2
3	19305.00	51.1 PK	74.0	-22.9	1.63 H	181	54.1	-3.0
4	19305.00	41.5 AV	54.0	-12.5	1.63 H	181	44.5	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

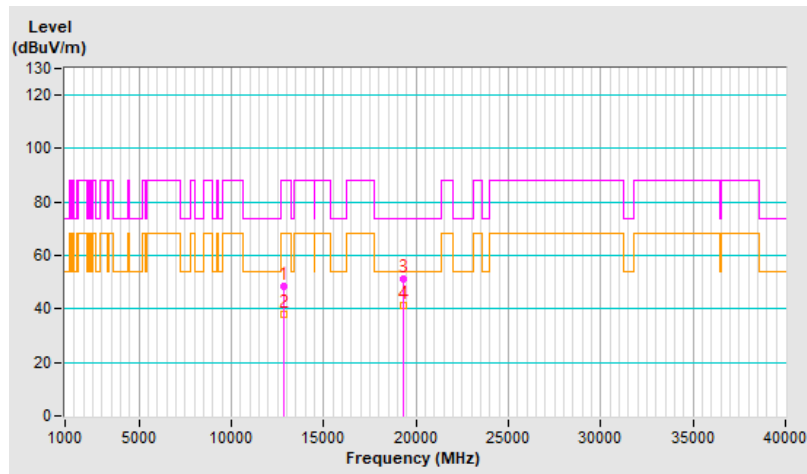


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.4 PK	88.2	-40.8	1.95 V	149	31.2	16.2
2	#12870.00	37.1 AV	68.2	-31.1	1.95 V	149	20.9	16.2
3	19305.00	51.7 PK	74.0	-22.3	1.65 V	52	54.7	-3.0
4	19305.00	41.6 AV	54.0	-12.4	1.65 V	52	44.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

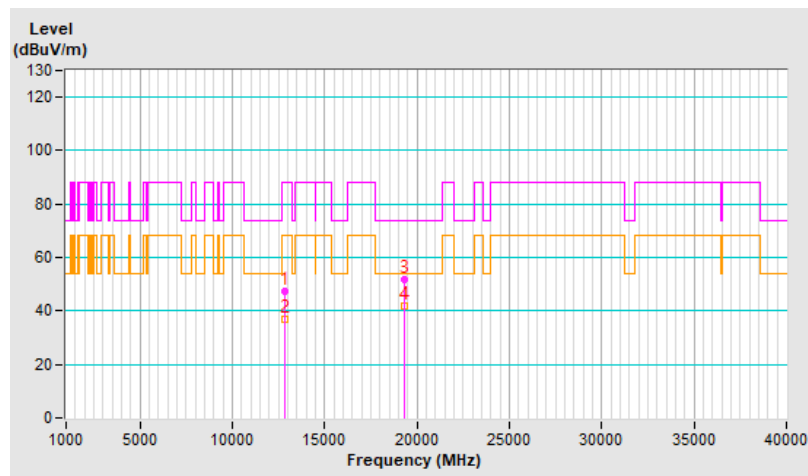


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	2.97 H	89	32.3	16.3
2	#13030.00	37.9 AV	68.2	-30.3	2.97 H	89	21.6	16.3
3	19545.00	50.8 PK	74.0	-23.2	1.65 H	194	54.7	-3.9
4	19545.00	41.4 AV	54.0	-12.6	1.65 H	194	45.3	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

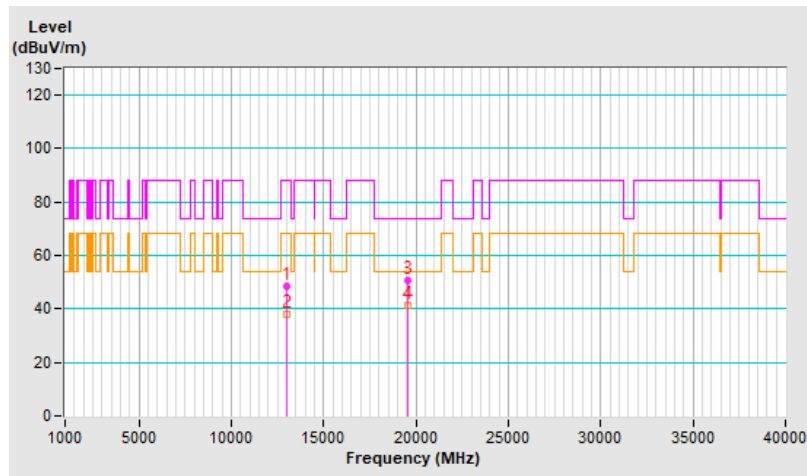




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	47.1 PK	88.2	-41.1	1.98 V	167	30.8	16.3
2	#13030.00	37.2 AV	68.2	-31.0	1.98 V	167	20.9	16.3
3	19545.00	52.1 PK	74.0	-21.9	1.61 V	55	56.0	-3.9
4	19545.00	42.0 AV	54.0	-12.0	1.61 V	55	45.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

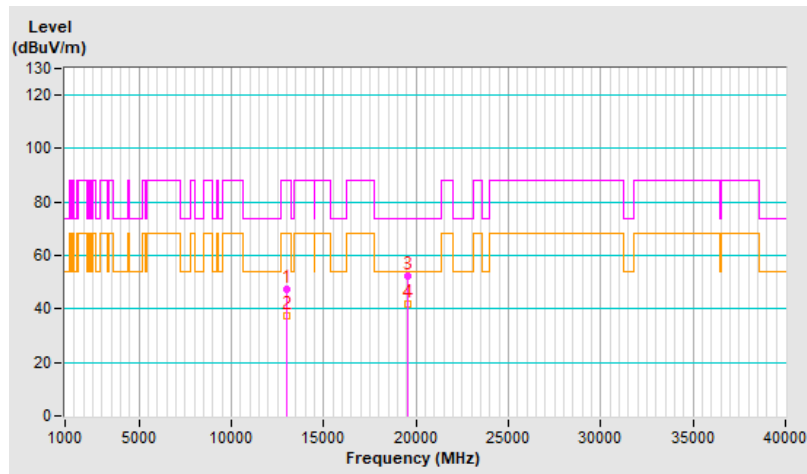


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.0 PK	88.2	-40.2	2.97 H	104	31.7	16.3
2	#13070.00	37.6 AV	68.2	-30.6	2.97 H	104	21.3	16.3
3	19605.00	50.9 PK	74.0	-23.1	1.65 H	177	54.9	-4.0
4	19605.00	41.3 AV	54.0	-12.7	1.65 H	177	45.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

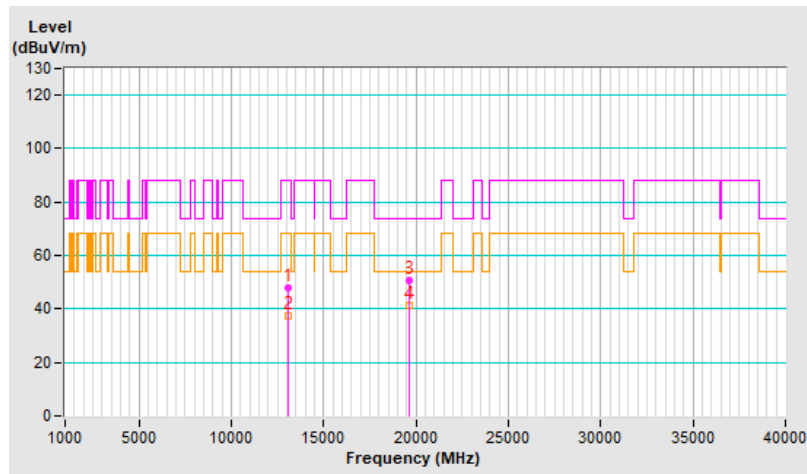


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.3 PK	88.2	-40.9	2.01 V	145	31.0	16.3
2	#13070.00	37.3 AV	68.2	-30.9	2.01 V	145	21.0	16.3
3	19605.00	52.3 PK	74.0	-21.7	1.68 V	65	56.3	-4.0
4	19605.00	42.0 AV	54.0	-12.0	1.68 V	65	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

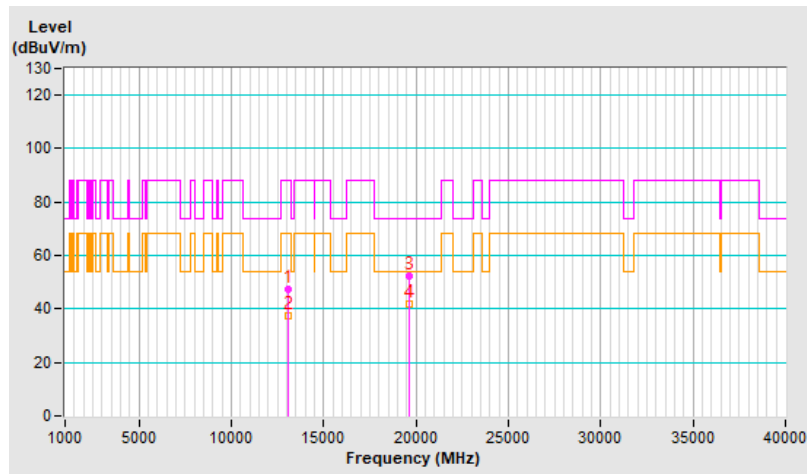




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13750.00	49.0 PK	88.2	-39.2	2.99 H	118	30.1	18.9
2	#13750.00	38.1 AV	68.2	-30.1	2.99 H	118	19.2	18.9
3	20625.00	51.2 PK	74.0	-22.8	1.62 H	194	54.1	-2.9
4	20625.00	41.8 AV	54.0	-12.2	1.62 H	194	44.7	-2.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

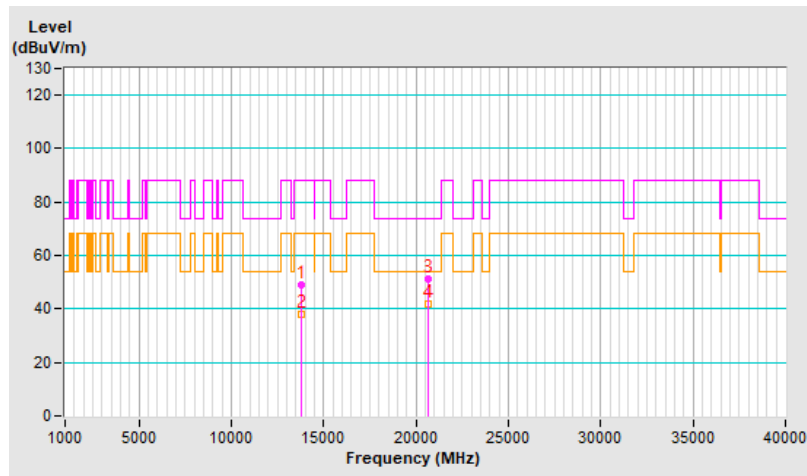


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	1.97 V	160	29.6	18.9
2	#13750.00	37.9 AV	68.2	-30.3	1.97 V	160	19.0	18.9
3	20625.00	53.0 PK	74.0	-21.0	1.63 V	38	55.9	-2.9
4	20625.00	42.7 AV	54.0	-11.3	1.63 V	38	45.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

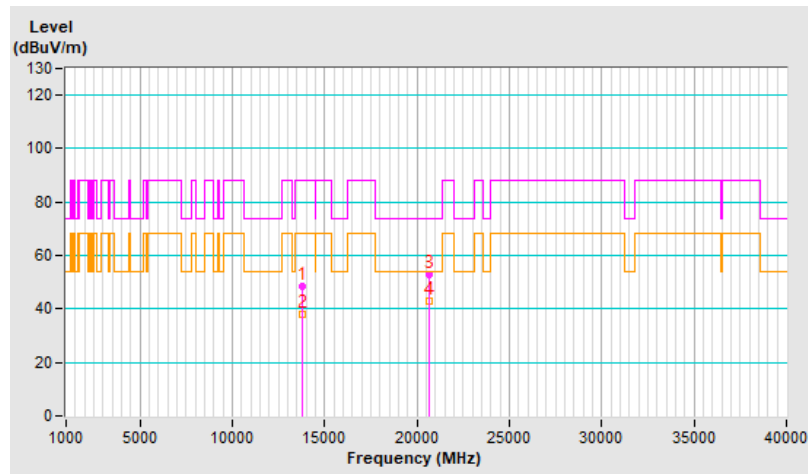


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	3.00 H	91	30.0	18.9
2	#13990.00	38.4 AV	68.2	-29.8	3.00 H	91	19.5	18.9
3	20985.00	51.0 PK	74.0	-23.0	1.63 H	174	53.0	-2.0
4	20985.00	41.5 AV	54.0	-12.5	1.63 H	174	43.5	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

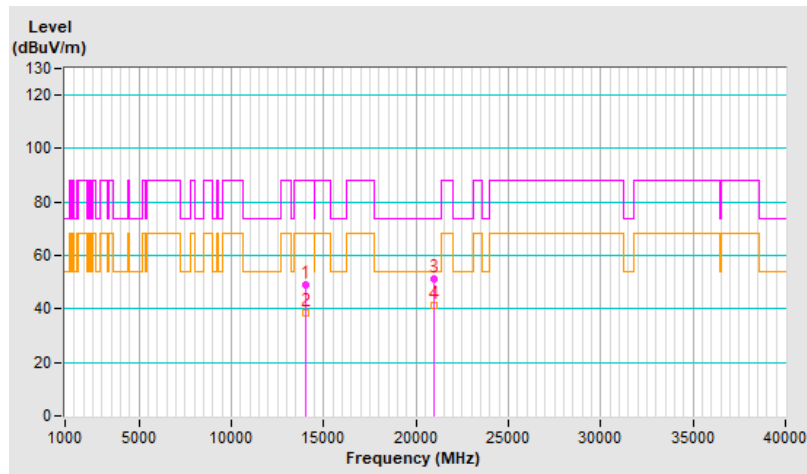




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.3 PK	88.2	-39.9	1.99 V	159	29.4	18.9
2	#13990.00	37.4 AV	68.2	-30.8	1.99 V	159	18.5	18.9
3	20985.00	53.3 PK	74.0	-20.7	1.66 V	53	55.3	-2.0
4	20985.00	42.9 AV	54.0	-11.1	1.66 V	53	44.9	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

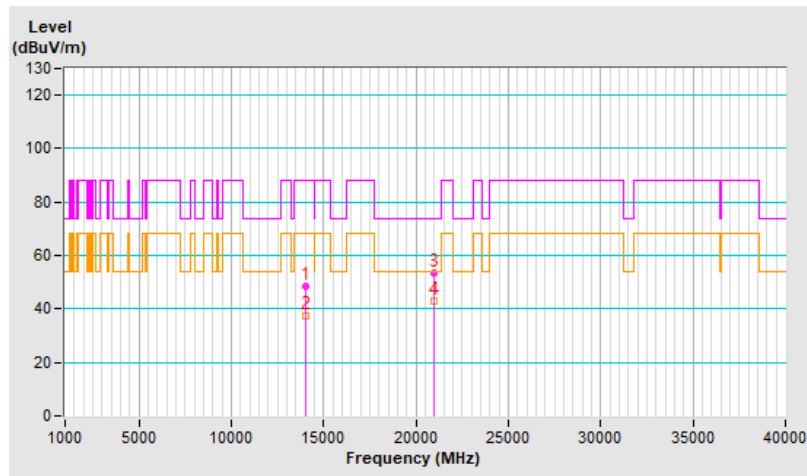


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	3.02 H	105	29.2	19.6
2	#14230.00	38.3 AV	68.2	-29.9	3.02 H	105	18.7	19.6
3	21345.00	51.5 PK	74.0	-22.5	1.62 H	183	53.2	-1.7
4	21345.00	41.8 AV	54.0	-12.2	1.62 H	183	43.5	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

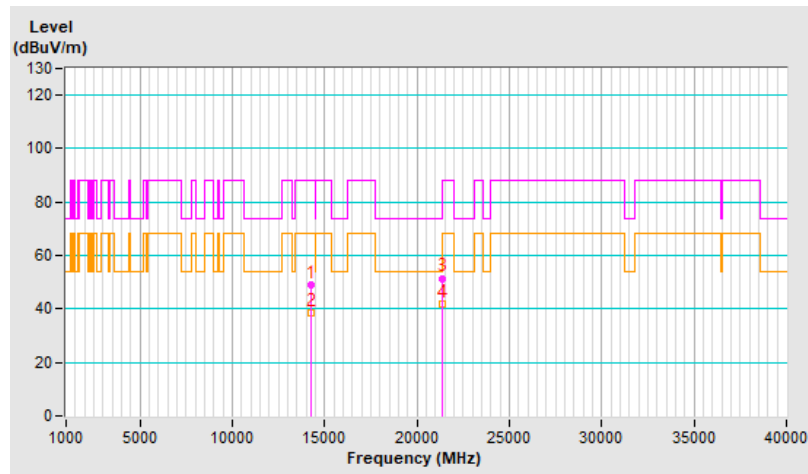


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.4 PK	88.2	-39.8	1.94 V	163	28.8	19.6
2	#14230.00	38.1 AV	68.2	-30.1	1.94 V	163	18.5	19.6
3	21345.00	52.8 PK	74.0	-21.2	1.58 V	40	54.5	-1.7
4	21345.00	42.6 AV	54.0	-11.4	1.58 V	40	44.3	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

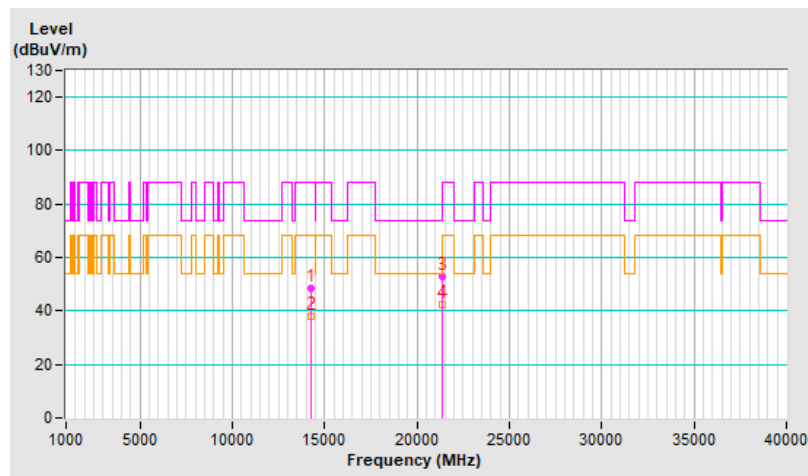


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	3.00 H	118	32.8	15.9
2	11910.00	37.9 AV	54.0	-16.1	3.00 H	118	22.0	15.9
3	17865.00	51.3 PK	74.0	-22.7	1.58 H	182	24.0	27.3
4	17865.00	41.5 AV	54.0	-12.5	1.58 H	182	14.2	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

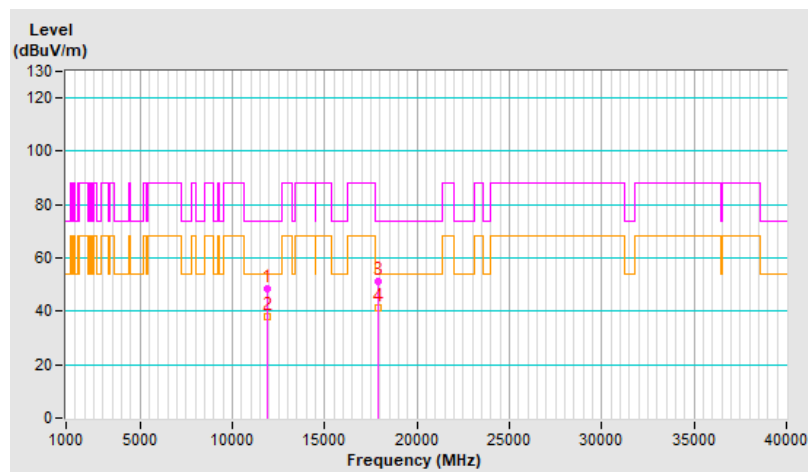


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	2.06 V	151	31.8	15.9
2	11910.00	37.6 AV	54.0	-16.4	2.06 V	151	21.7	15.9
3	17865.00	52.6 PK	74.0	-21.4	1.60 V	44	25.3	27.3
4	17865.00	42.1 AV	54.0	-11.9	1.60 V	44	14.8	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

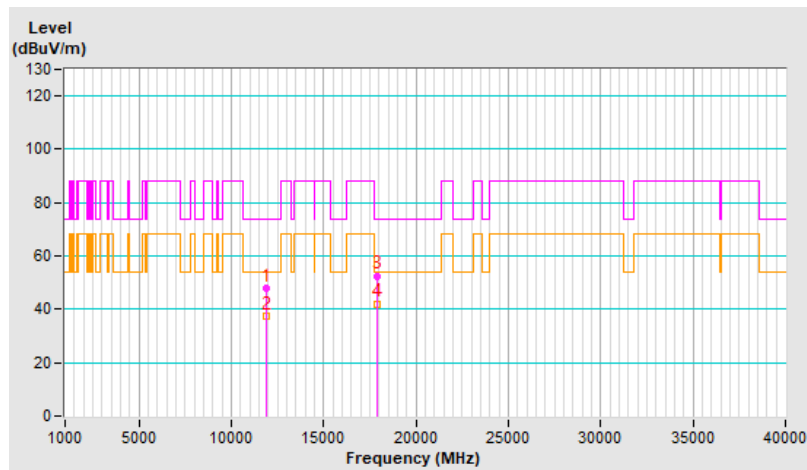


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.1 PK	88.2	-40.1	2.97 H	107	32.1	16.0
2	#12830.00	37.7 AV	68.2	-30.5	2.97 H	107	21.7	16.0
3	19245.00	50.8 PK	74.0	-23.2	1.59 H	189	53.9	-3.1
4	19245.00	41.5 AV	54.0	-12.5	1.59 H	189	44.6	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

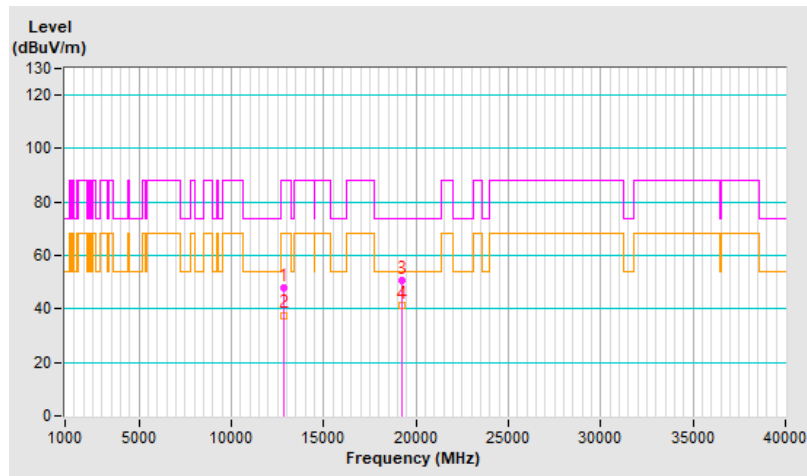


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	2.03 V	136	31.7	16.0
2	#12830.00	37.5 AV	68.2	-30.7	2.03 V	136	21.5	16.0
3	19245.00	52.7 PK	74.0	-21.3	1.64 V	38	55.8	-3.1
4	19245.00	42.1 AV	54.0	-11.9	1.64 V	38	45.2	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

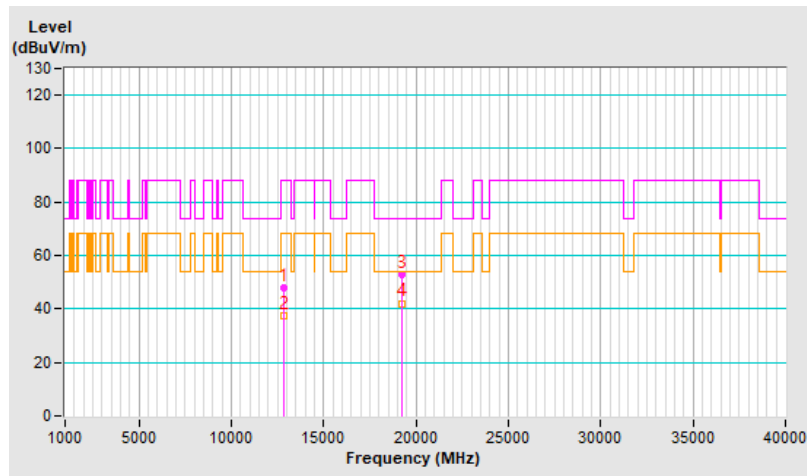


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	48.7 PK	88.2	-39.5	2.99 H	109	32.5	16.2
2	#12870.00	37.9 AV	68.2	-30.3	2.99 H	109	21.7	16.2
3	19305.00	50.7 PK	74.0	-23.3	1.59 H	166	53.7	-3.0
4	19305.00	41.4 AV	54.0	-12.6	1.59 H	166	44.4	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

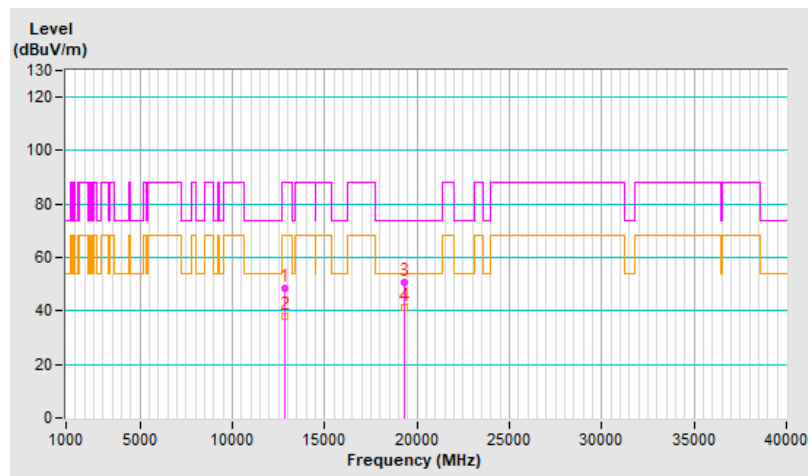


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.6 PK	88.2	-40.6	2.04 V	144	31.4	16.2
2	#12870.00	37.3 AV	68.2	-30.9	2.04 V	144	21.1	16.2
3	19305.00	52.9 PK	74.0	-21.1	1.65 V	46	55.9	-3.0
4	19305.00	42.5 AV	54.0	-11.5	1.65 V	46	45.5	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

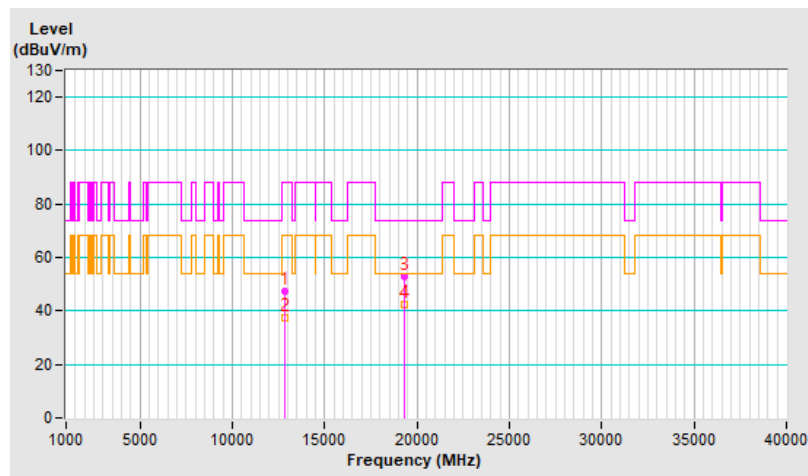


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.4 PK	88.2	-38.8	2.97 H	108	33.1	16.3
2	#13030.00	38.4 AV	68.2	-29.8	2.97 H	108	22.1	16.3
3	19545.00	50.5 PK	74.0	-23.5	1.63 H	164	54.4	-3.9
4	19545.00	41.4 AV	54.0	-12.6	1.63 H	164	45.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

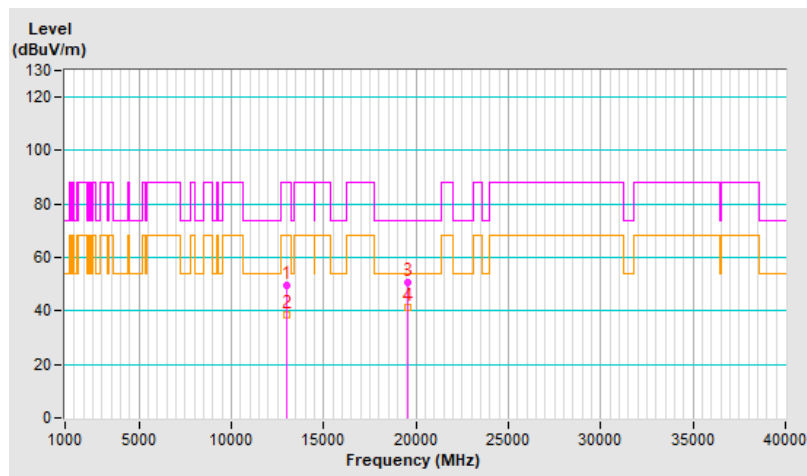




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.0 PK	88.2	-40.2	2.02 V	154	31.7	16.3
2	#13030.00	38.0 AV	68.2	-30.2	2.02 V	154	21.7	16.3
3	19545.00	52.9 PK	74.0	-21.1	1.55 V	32	56.8	-3.9
4	19545.00	42.1 AV	54.0	-11.9	1.55 V	32	46.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

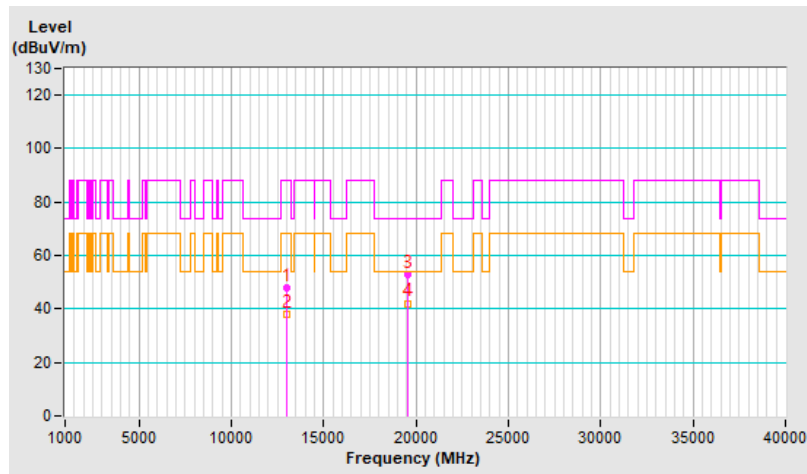


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	3.00 H	100	32.4	16.3
2	#13070.00	37.9 AV	68.2	-30.3	3.00 H	100	21.6	16.3
3	19605.00	51.2 PK	74.0	-22.8	1.55 H	178	55.2	-4.0
4	19605.00	41.7 AV	54.0	-12.3	1.55 H	178	45.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

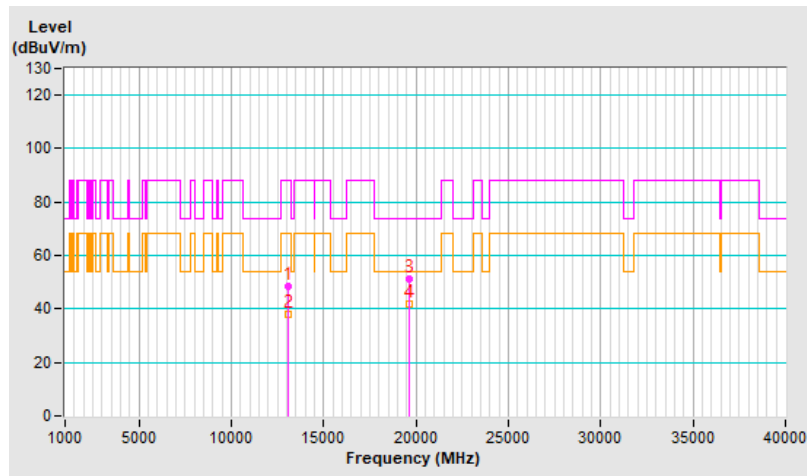




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.9 PK	88.2	-40.3	2.01 V	161	31.6	16.3
2	#13070.00	37.6 AV	68.2	-30.6	2.01 V	161	21.3	16.3
3	19605.00	52.8 PK	74.0	-21.2	1.65 V	50	56.8	-4.0
4	19605.00	42.3 AV	54.0	-11.7	1.65 V	50	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

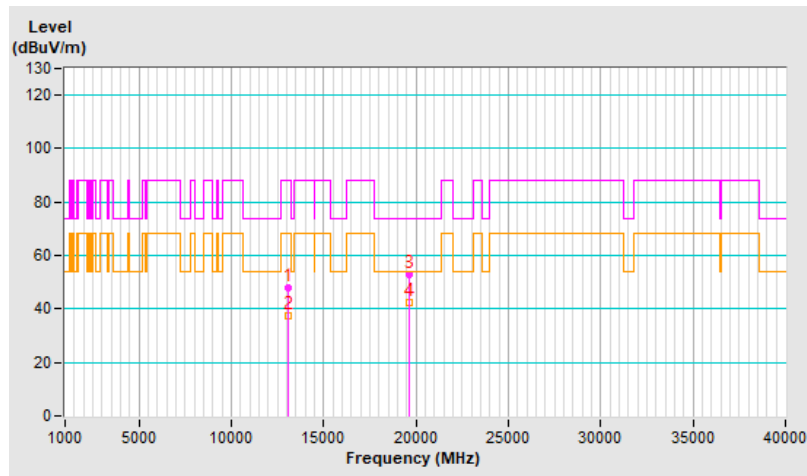


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.8 PK	88.2	-39.4	3.01 H	121	29.9	18.9
2	#13750.00	38.0 AV	68.2	-30.2	3.01 H	121	19.1	18.9
3	20625.00	50.6 PK	74.0	-23.4	1.55 H	176	53.5	-2.9
4	20625.00	41.5 AV	54.0	-12.5	1.55 H	176	44.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

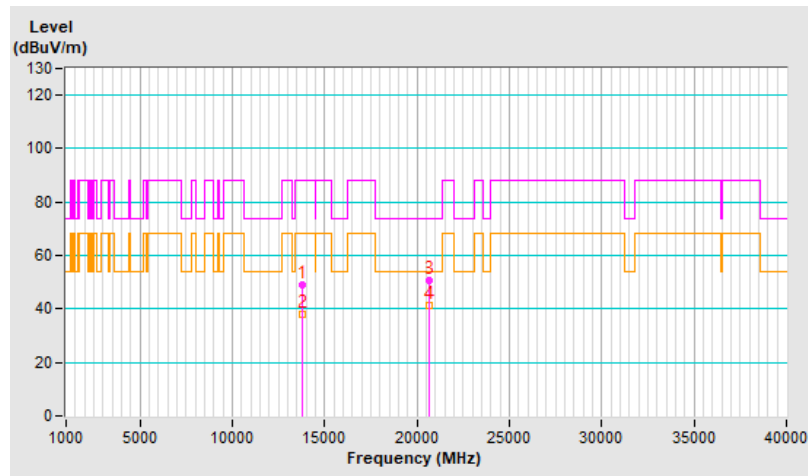


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.9 PK	88.2	-40.3	2.06 V	153	29.0	18.9
2	#13750.00	37.7 AV	68.2	-30.5	2.06 V	153	18.8	18.9
3	20625.00	52.7 PK	74.0	-21.3	1.55 V	45	55.6	-2.9
4	20625.00	42.1 AV	54.0	-11.9	1.55 V	45	45.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

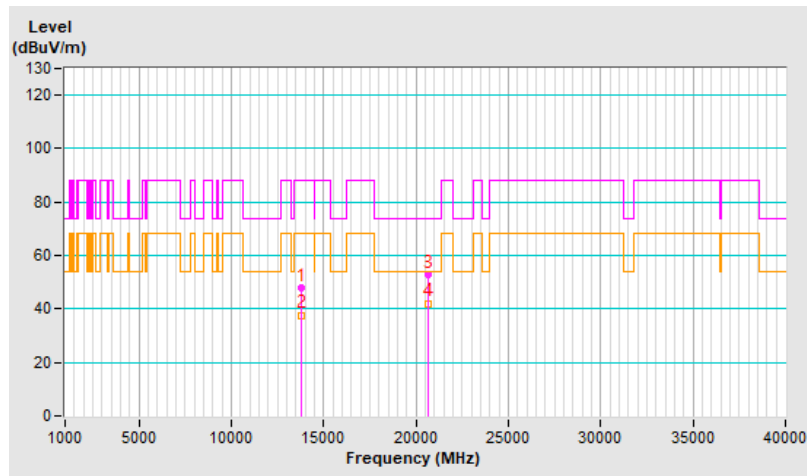


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	49.5 PK	88.2	-38.7	2.95 H	120	30.6	18.9
2	#13990.00	38.4 AV	68.2	-29.8	2.95 H	120	19.5	18.9
3	20985.00	50.6 PK	74.0	-23.4	1.57 H	151	52.6	-2.0
4	20985.00	41.5 AV	54.0	-12.5	1.57 H	151	43.5	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

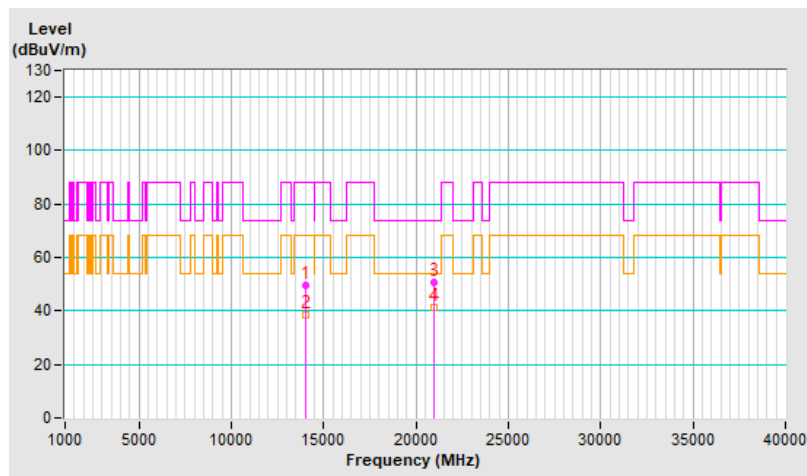




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.0 PK	88.2	-40.2	2.00 V	144	29.1	18.9
2	#13990.00	38.0 AV	68.2	-30.2	2.00 V	144	19.1	18.9
3	20985.00	52.7 PK	74.0	-21.3	1.59 V	34	54.7	-2.0
4	20985.00	42.1 AV	54.0	-11.9	1.59 V	34	44.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

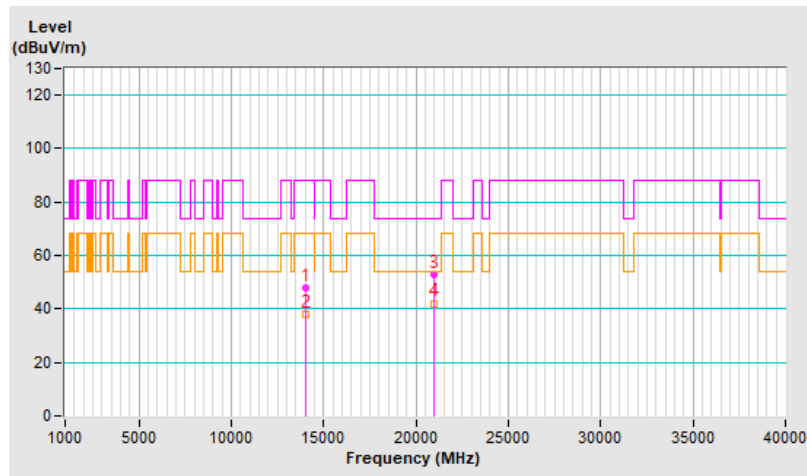


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	2.94 H	94	29.2	19.6
2	#14230.00	37.9 AV	68.2	-30.3	2.94 H	94	18.3	19.6
3	21345.00	50.8 PK	74.0	-23.2	1.55 H	181	52.5	-1.7
4	21345.00	41.3 AV	54.0	-12.7	1.55 H	181	43.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

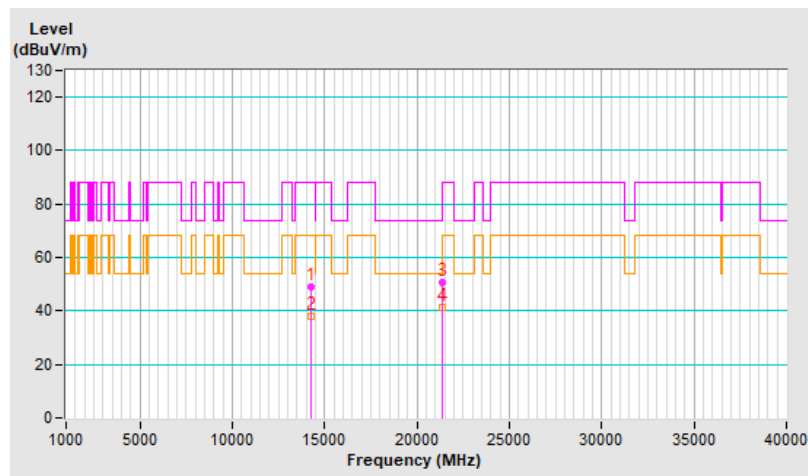


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	47.8 PK	88.2	-40.4	2.01 V	149	28.2	19.6
2	#14230.00	37.5 AV	68.2	-30.7	2.01 V	149	17.9	19.6
3	21345.00	52.9 PK	74.0	-21.1	1.61 V	48	54.6	-1.7
4	21345.00	42.1 AV	54.0	-11.9	1.61 V	48	43.8	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

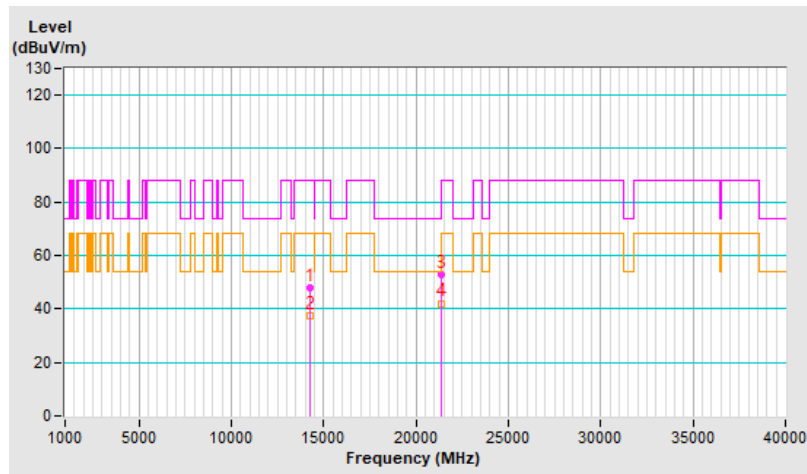


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.7 PK	74.0	-25.3	2.97 H	119	32.8	15.9
2	11910.00	37.7 AV	54.0	-16.3	2.97 H	119	21.8	15.9
3	17865.00	50.6 PK	74.0	-23.4	1.60 H	166	23.3	27.3
4	17865.00	41.1 AV	54.0	-12.9	1.60 H	166	13.8	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

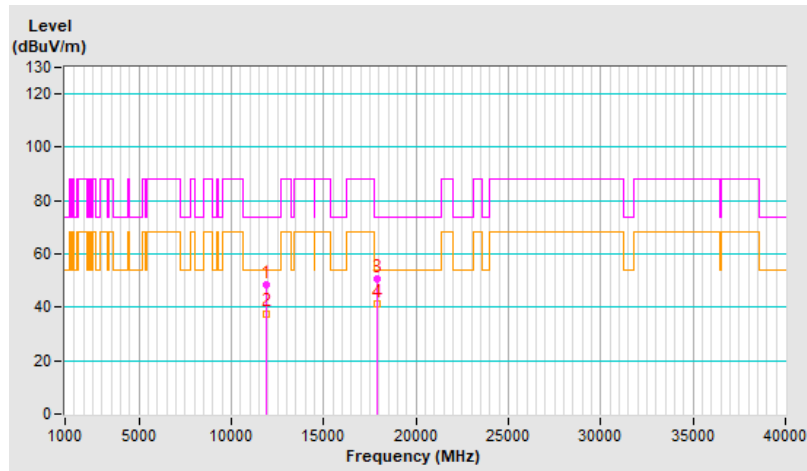


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	47.7 PK	74.0	-26.3	2.10 V	136	31.8	15.9
2	11910.00	37.5 AV	54.0	-16.5	2.10 V	136	21.6	15.9
3	17865.00	52.7 PK	74.0	-21.3	1.61 V	32	25.4	27.3
4	17865.00	42.1 AV	54.0	-11.9	1.61 V	32	14.8	27.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

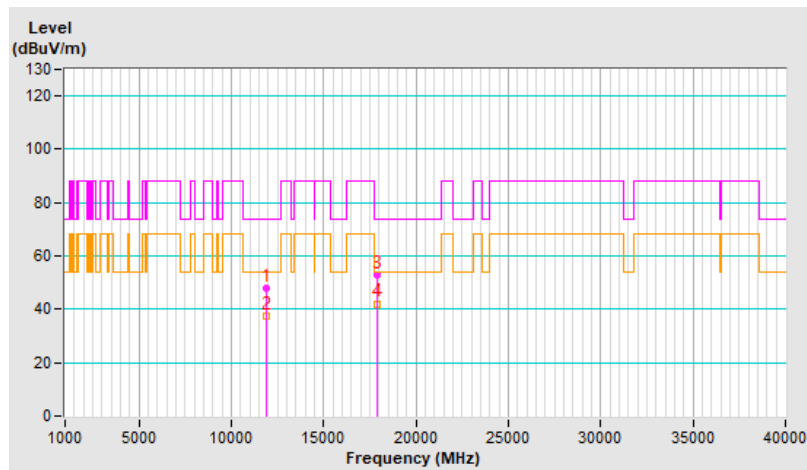


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12830.00	48.6 PK	88.2	-39.6	3.03 H	109	32.6	16.0
2	#12830.00	37.7 AV	68.2	-30.5	3.03 H	109	21.7	16.0
3	19245.00	51.0 PK	74.0	-23.0	1.64 H	176	54.1	-3.1
4	19245.00	41.9 AV	54.0	-12.1	1.64 H	176	45.0	-3.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

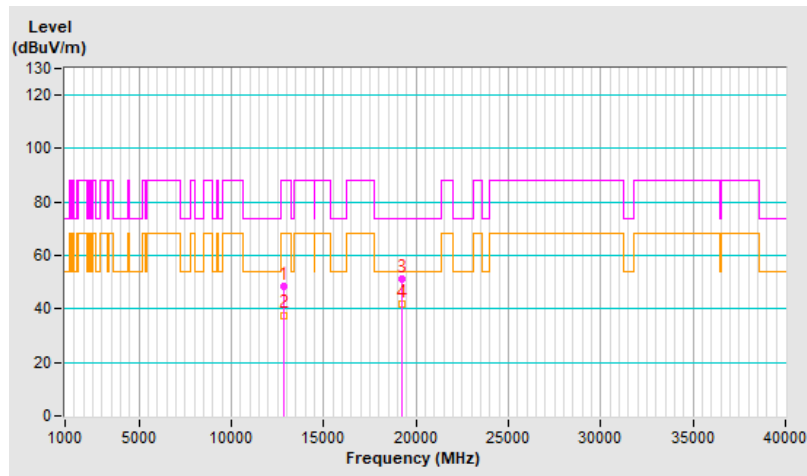


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	47.7 PK	88.2	-40.5	2.14 V	139	31.7	16.0
2	#12830.00	37.4 AV	68.2	-30.8	2.14 V	139	21.4	16.0
3	19245.00	52.5 PK	74.0	-21.5	1.63 V	21	55.6	-3.1
4	19245.00	42.0 AV	54.0	-12.0	1.63 V	21	45.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

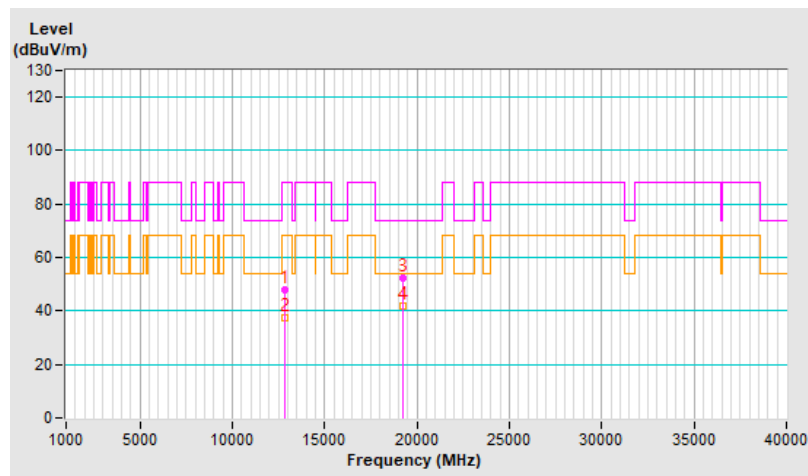


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12870.00	48.4 PK	88.2	-39.8	2.97 H	118	32.2	16.2
2	#12870.00	37.5 AV	68.2	-30.7	2.97 H	118	21.3	16.2
3	19305.00	50.6 PK	74.0	-23.4	1.53 H	169	53.6	-3.0
4	19305.00	41.3 AV	54.0	-12.7	1.53 H	169	44.3	-3.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

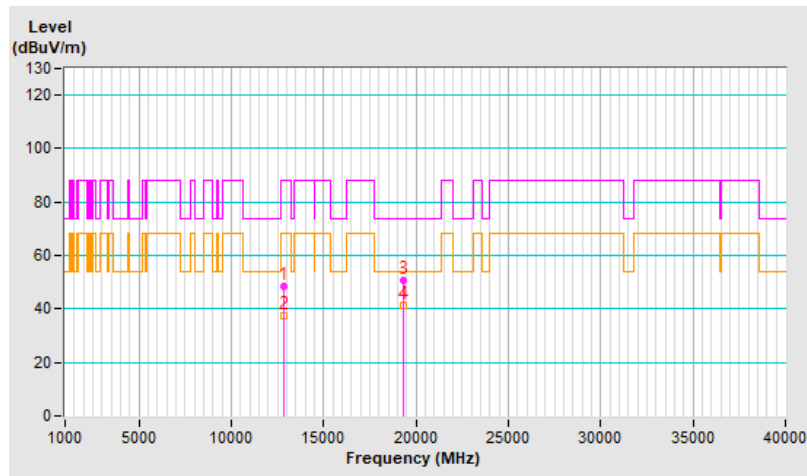


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	47.1 PK	88.2	-41.1	2.09 V	144	30.9	16.2
2	#12870.00	37.1 AV	68.2	-31.1	2.09 V	144	20.9	16.2
3	19305.00	52.8 PK	74.0	-21.2	1.57 V	24	55.8	-3.0
4	19305.00	42.1 AV	54.0	-11.9	1.57 V	24	45.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

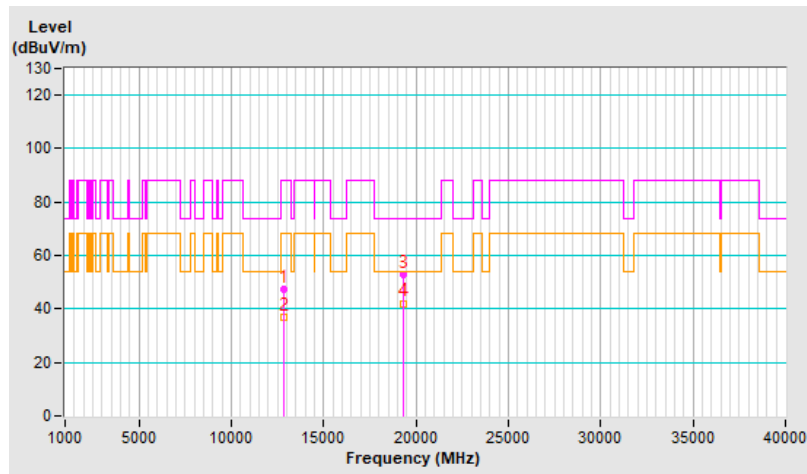


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	48.3 PK	88.2	-39.9	2.95 H	114	32.0	16.3
2	#13030.00	37.8 AV	68.2	-30.4	2.95 H	114	21.5	16.3
3	19545.00	50.6 PK	74.0	-23.4	1.49 H	167	54.5	-3.9
4	19545.00	41.4 AV	54.0	-12.6	1.49 H	167	45.3	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

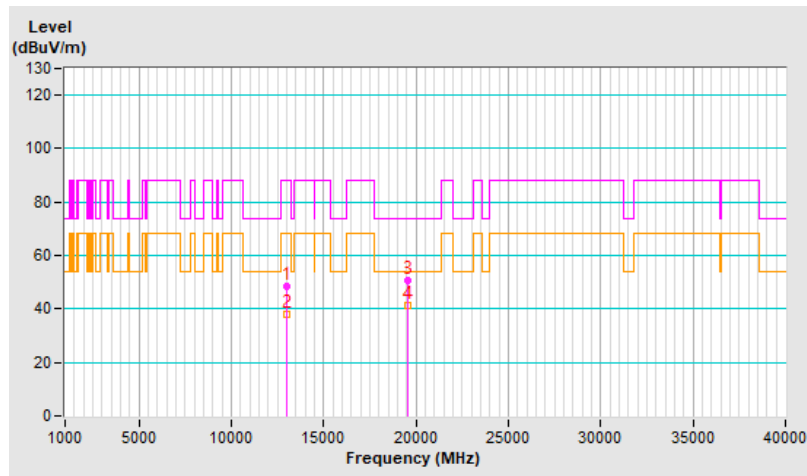




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13030.00	47.3 PK	88.2	-40.9	2.13 V	149	31.0	16.3
2	#13030.00	37.3 AV	68.2	-30.9	2.13 V	149	21.0	16.3
3	19545.00	52.8 PK	74.0	-21.2	1.61 V	46	56.7	-3.9
4	19545.00	42.0 AV	54.0	-12.0	1.61 V	46	45.9	-3.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

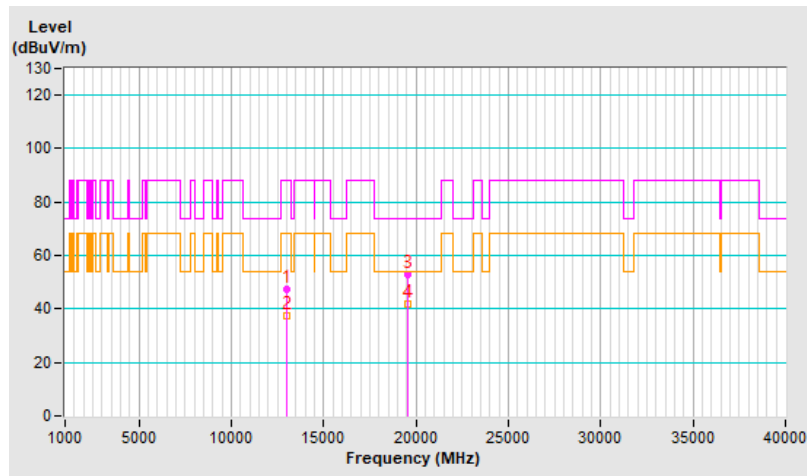


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13070.00	48.9 PK	88.2	-39.3	2.95 H	128	32.6	16.3
2	#13070.00	38.1 AV	68.2	-30.1	2.95 H	128	21.8	16.3
3	19605.00	50.4 PK	74.0	-23.6	1.46 H	163	54.4	-4.0
4	19605.00	41.4 AV	54.0	-12.6	1.46 H	163	45.4	-4.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

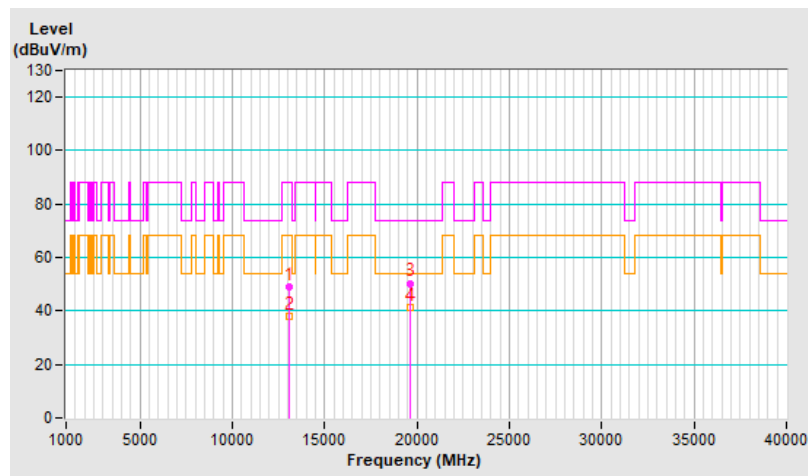


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.4 PK	88.2	-40.8	2.08 V	130	31.1	16.3
2	#13070.00	37.0 AV	68.2	-31.2	2.08 V	130	20.7	16.3
3	19605.00	53.3 PK	74.0	-20.7	1.61 V	32	57.3	-4.0
4	19605.00	42.4 AV	54.0	-11.6	1.61 V	32	46.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

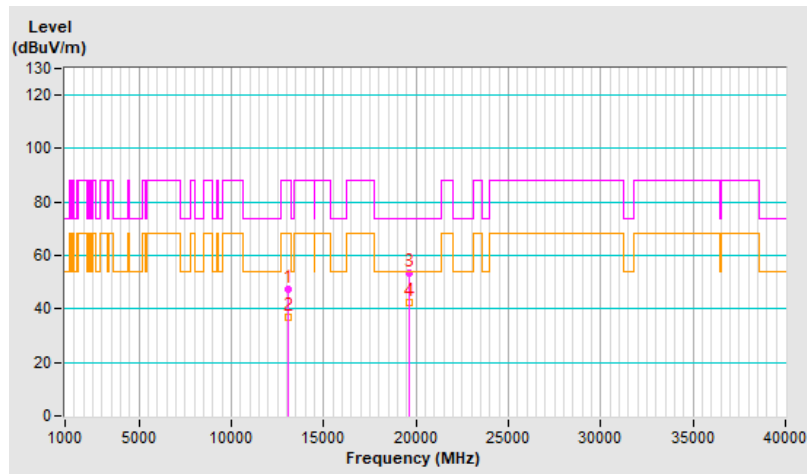


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.5 PK	88.2	-39.7	2.96 H	109	29.6	18.9
2	#13750.00	37.7 AV	68.2	-30.5	2.96 H	109	18.8	18.9
3	20625.00	50.2 PK	74.0	-23.8	1.50 H	181	53.1	-2.9
4	20625.00	41.2 AV	54.0	-12.8	1.50 H	181	44.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

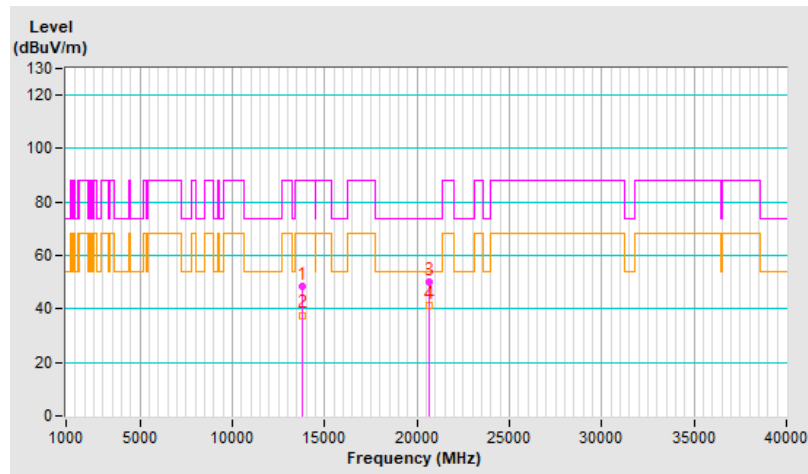


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	47.8 PK	88.2	-40.4	2.09 V	132	28.9	18.9
2	#13750.00	37.6 AV	68.2	-30.6	2.09 V	132	18.7	18.9
3	20625.00	53.4 PK	74.0	-20.6	1.56 V	43	56.3	-2.9
4	20625.00	42.6 AV	54.0	-11.4	1.56 V	43	45.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

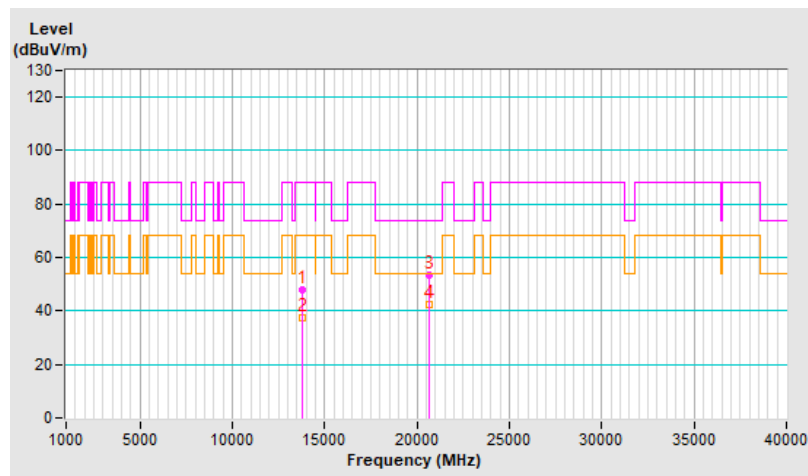


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.5 PK	88.2	-39.7	3.00 H	119	29.6	18.9
2	#13990.00	37.8 AV	68.2	-30.4	3.00 H	119	18.9	18.9
3	20985.00	50.3 PK	74.0	-23.7	1.54 H	164	52.3	-2.0
4	20985.00	41.1 AV	54.0	-12.9	1.54 H	164	43.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

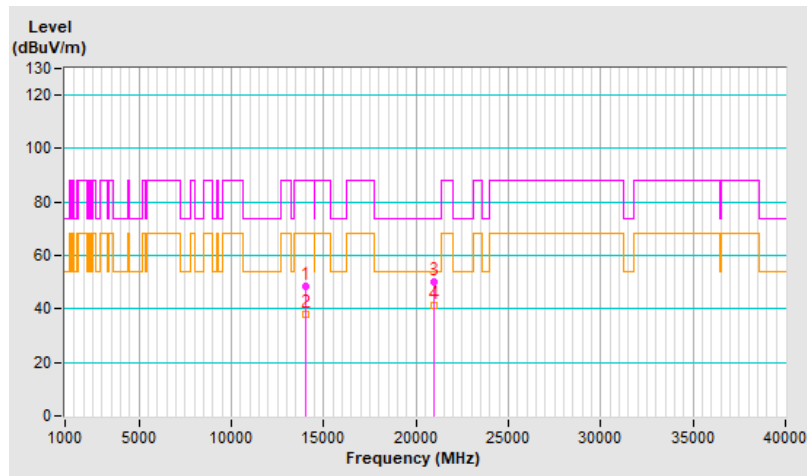


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	47.9 PK	88.2	-40.3	2.15 V	146	29.0	18.9
2	#13990.00	37.8 AV	68.2	-30.4	2.15 V	146	18.9	18.9
3	20985.00	53.0 PK	74.0	-21.0	1.65 V	46	55.0	-2.0
4	20985.00	42.2 AV	54.0	-11.8	1.65 V	46	44.2	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

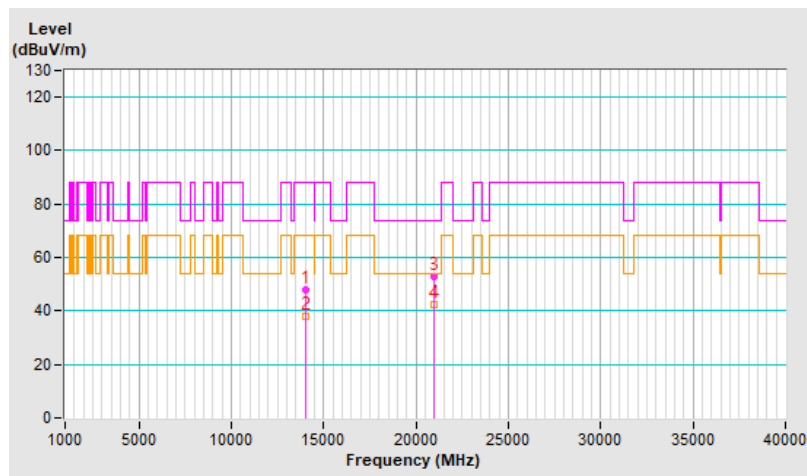


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	48.7 PK	88.2	-39.5	2.92 H	119	29.1	19.6
2	#14230.00	38.1 AV	68.2	-30.1	2.92 H	119	18.5	19.6
3	21345.00	51.1 PK	74.0	-22.9	1.51 H	155	52.8	-1.7
4	21345.00	41.7 AV	54.0	-12.3	1.51 H	155	43.4	-1.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

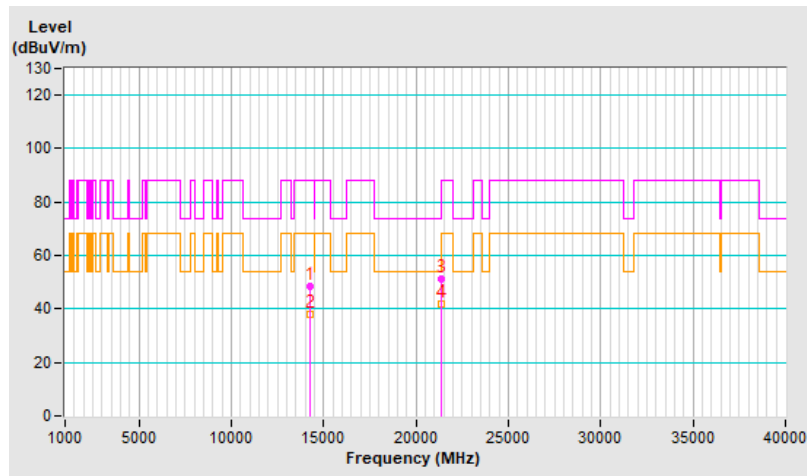


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14230.00	47.6 PK	88.2	-40.6	2.09 V	121	28.0	19.6
2	#14230.00	37.6 AV	68.2	-30.6	2.09 V	121	18.0	19.6
3	21345.00	51.9 PK	74.0	-22.1	1.55 V	30	53.6	-1.7
4	21345.00	41.6 AV	54.0	-12.4	1.55 V	30	43.3	-1.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

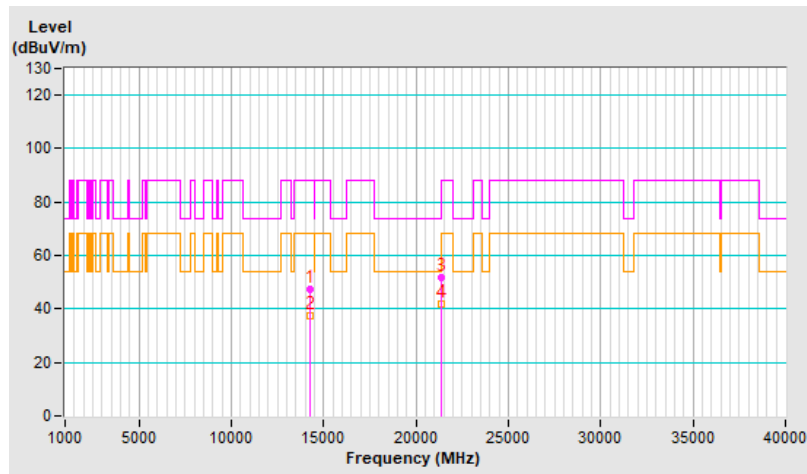


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	48.2 PK	74.0	-25.8	2.89 H	120	31.9	16.3
2	11970.00	37.4 AV	54.0	-16.6	2.89 H	120	21.1	16.3
3	17955.00	50.6 PK	74.0	-23.4	1.50 H	162	21.5	29.1
4	17955.00	41.1 AV	54.0	-12.9	1.50 H	162	12.0	29.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

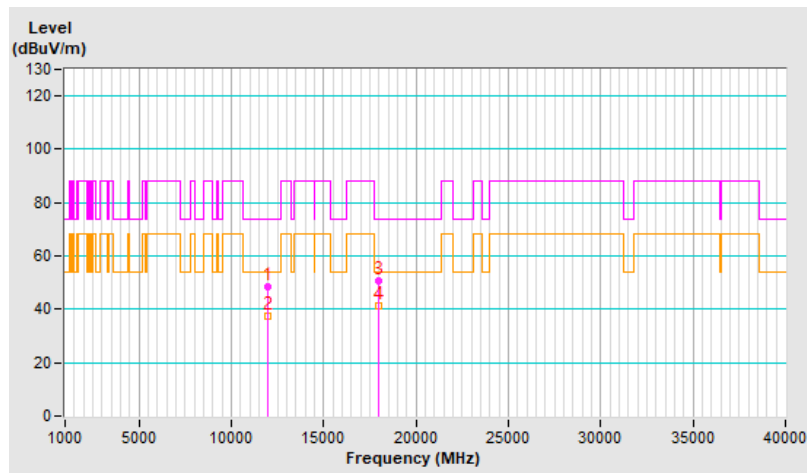


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	47.6 PK	74.0	-26.4	2.09 V	140	31.3	16.3
2	11970.00	37.2 AV	54.0	-16.8	2.09 V	140	20.9	16.3
3	17955.00	52.5 PK	74.0	-21.5	1.57 V	24	23.4	29.1
4	17955.00	41.7 AV	54.0	-12.3	1.57 V	24	12.6	29.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

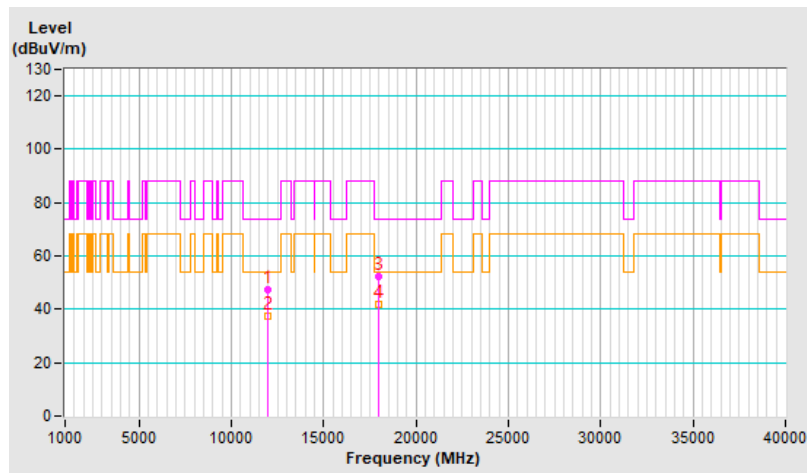


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12770.00	48.1 PK	88.2	-40.1	2.91 H	102	32.4	15.7
2	#12770.00	37.4 AV	68.2	-30.8	2.91 H	102	21.7	15.7
3	19155.00	50.9 PK	74.0	-23.1	1.51 H	165	54.2	-3.3
4	19155.00	41.8 AV	54.0	-12.2	1.51 H	165	45.1	-3.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

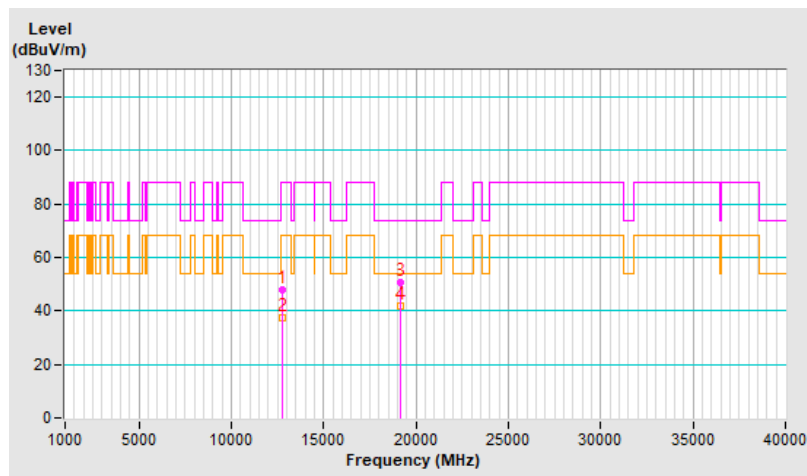


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#12770.00	47.7 PK	88.2	-40.5	2.07 V	122	32.0	15.7
2	#12770.00	37.4 AV	68.2	-30.8	2.07 V	122	21.7	15.7
3	19155.00	53.1 PK	74.0	-20.9	1.63 V	43	56.4	-3.3
4	19155.00	42.6 AV	54.0	-11.4	1.63 V	43	45.9	-3.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

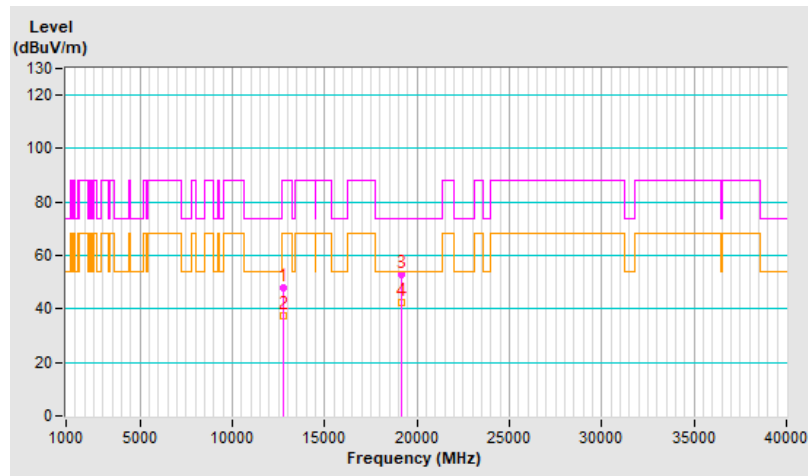


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	48.6 PK	88.2	-39.6	2.96 H	125	32.3	16.3
2	#12930.00	38.1 AV	68.2	-30.1	2.96 H	125	21.8	16.3
3	19395.00	50.8 PK	74.0	-23.2	1.55 H	159	54.4	-3.6
4	19395.00	41.4 AV	54.0	-12.6	1.55 H	159	45.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

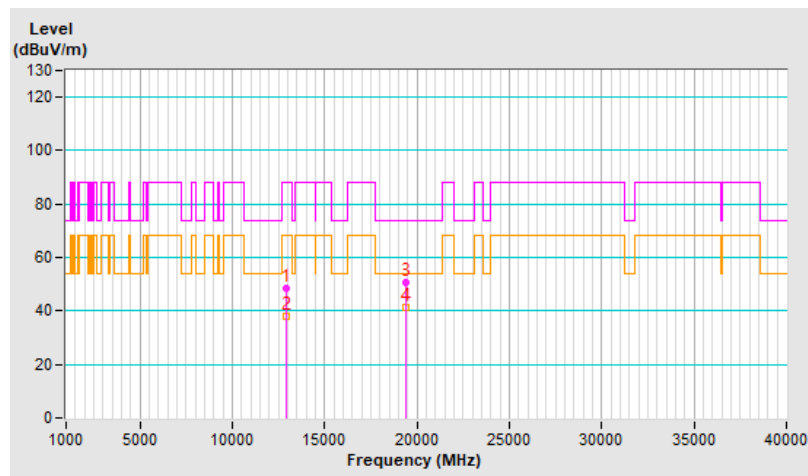


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	47.9 PK	88.2	-40.3	2.08 V	143	31.6	16.3
2	#12930.00	37.7 AV	68.2	-30.5	2.08 V	143	21.4	16.3
3	19395.00	52.7 PK	74.0	-21.3	1.62 V	35	56.3	-3.6
4	19395.00	42.2 AV	54.0	-11.8	1.62 V	35	45.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

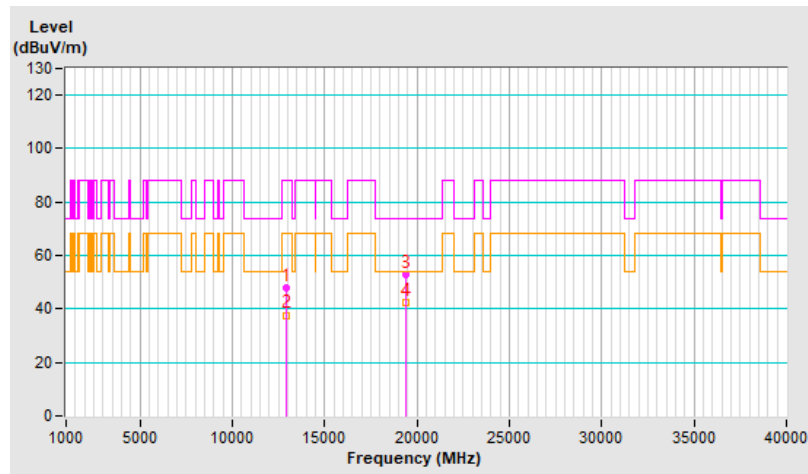


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.5 PK	88.2	-39.7	2.99 H	98	32.2	16.3
2	#13090.00	37.9 AV	68.2	-30.3	2.99 H	98	21.6	16.3
3	19635.00	50.2 PK	74.0	-23.8	1.48 H	167	53.9	-3.7
4	19635.00	41.1 AV	54.0	-12.9	1.48 H	167	44.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

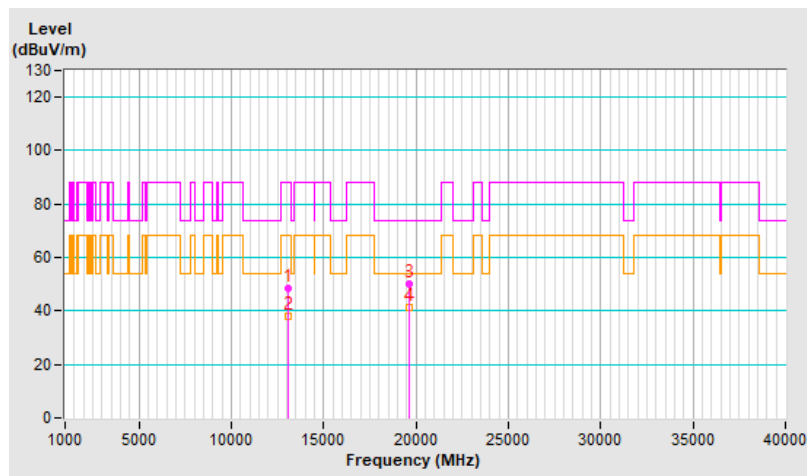


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	48.2 PK	88.2	-40.0	2.08 V	130	31.9	16.3
2	#13090.00	37.8 AV	68.2	-30.4	2.08 V	130	21.5	16.3
3	19635.00	52.7 PK	74.0	-21.3	1.56 V	25	56.4	-3.7
4	19635.00	42.2 AV	54.0	-11.8	1.56 V	25	45.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

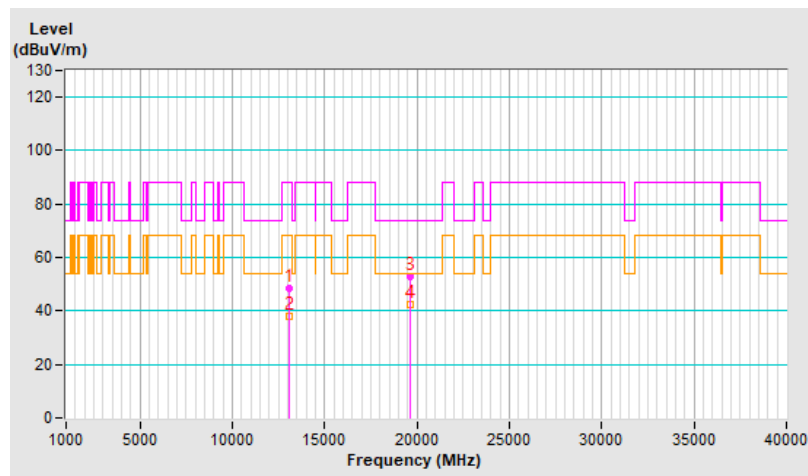


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.2 PK	88.2	-40.0	2.90 H	122	29.3	18.9
2	#13730.00	37.9 AV	68.2	-30.3	2.90 H	122	19.0	18.9
3	20595.00	50.7 PK	74.0	-23.3	1.46 H	174	53.6	-2.9
4	20595.00	41.5 AV	54.0	-12.5	1.46 H	174	44.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

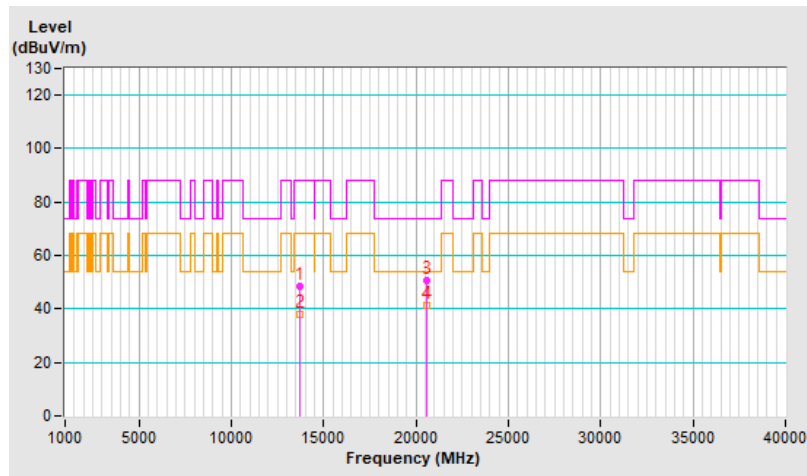




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	48.1 PK	88.2	-40.1	2.06 V	132	29.2	18.9
2	#13730.00	38.0 AV	68.2	-30.2	2.06 V	132	19.1	18.9
3	20595.00	53.1 PK	74.0	-20.9	1.59 V	45	56.0	-2.9
4	20595.00	42.4 AV	54.0	-11.6	1.59 V	45	45.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

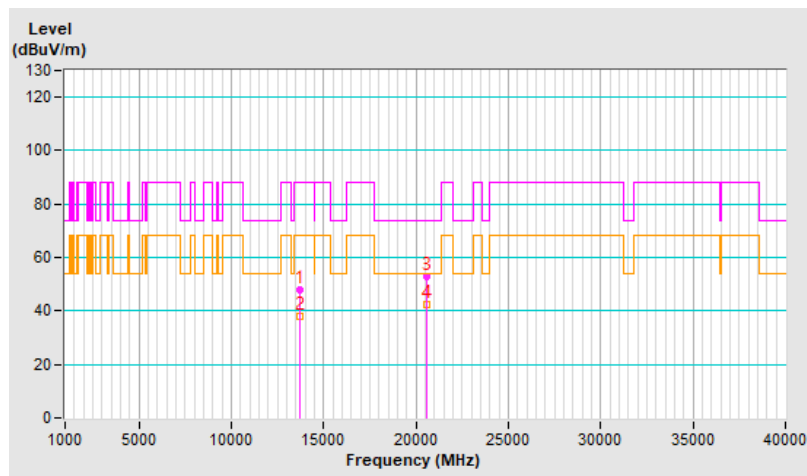


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13890.00	48.1 PK	88.2	-40.1	2.93 H	126	29.4	18.7
2	#13890.00	37.4 AV	68.2	-30.8	2.93 H	126	18.7	18.7
3	20835.00	50.4 PK	74.0	-23.6	1.52 H	169	52.9	-2.5
4	20835.00	41.1 AV	54.0	-12.9	1.52 H	169	43.6	-2.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

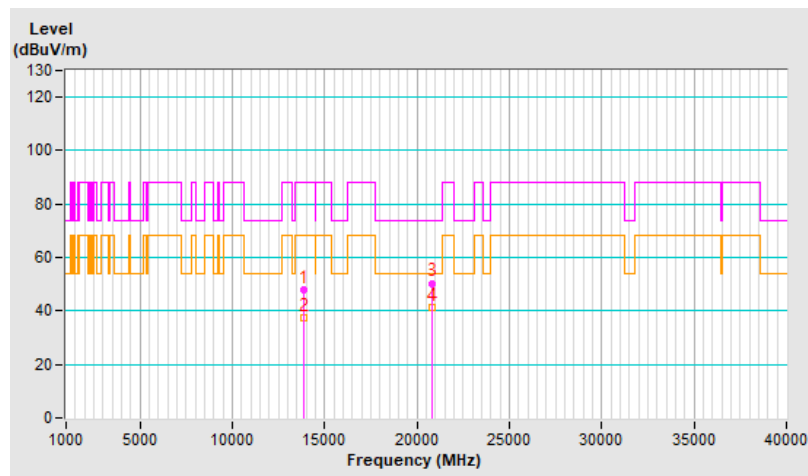


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13890.00	46.9 PK	88.2	-41.3	2.05 V	122	28.2	18.7
2	#13890.00	37.0 AV	68.2	-31.2	2.05 V	122	18.3	18.7
3	20835.00	53.0 PK	74.0	-21.0	1.63 V	24	55.5	-2.5
4	20835.00	42.6 AV	54.0	-11.4	1.63 V	24	45.1	-2.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

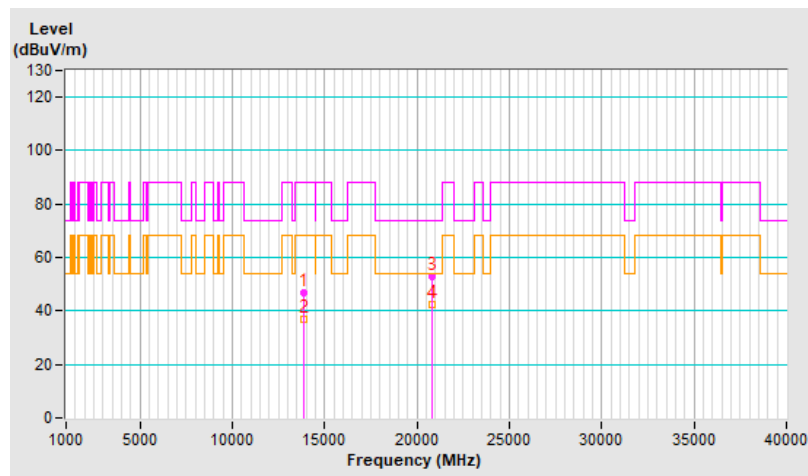


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#14050.00	48.3 PK	88.2	-39.9	2.90 H	117	29.3	19.0
2	#14050.00	37.8 AV	68.2	-30.4	2.90 H	117	18.8	19.0
3	21075.00	50.2 PK	74.0	-23.8	1.52 H	175	52.0	-1.8
4	21075.00	41.2 AV	54.0	-12.8	1.52 H	175	43.0	-1.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

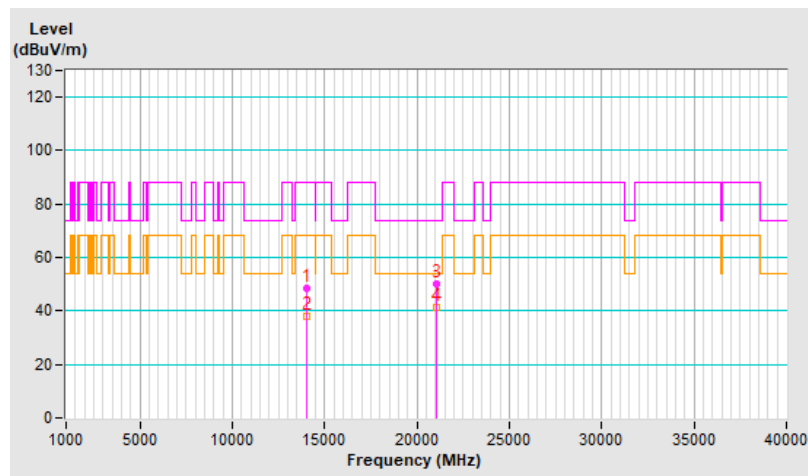


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	48.5 PK	88.2	-39.7	2.14 V	136	29.5	19.0
2	#14050.00	38.0 AV	68.2	-30.2	2.14 V	136	19.0	19.0
3	21075.00	52.3 PK	74.0	-21.7	1.64 V	29	54.1	-1.8
4	21075.00	41.8 AV	54.0	-12.2	1.64 V	29	43.6	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

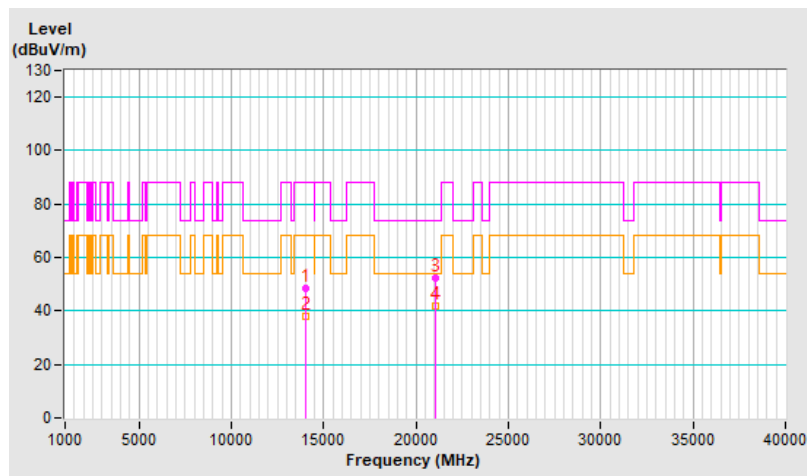


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.7 PK	74.0	-26.3	2.89 H	108	31.3	16.4
2	12050.00	37.3 AV	54.0	-16.7	2.89 H	108	20.9	16.4
3	18075.00	50.8 PK	74.0	-23.2	1.51 H	182	54.4	-3.6
4	18075.00	41.4 AV	54.0	-12.6	1.51 H	182	45.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

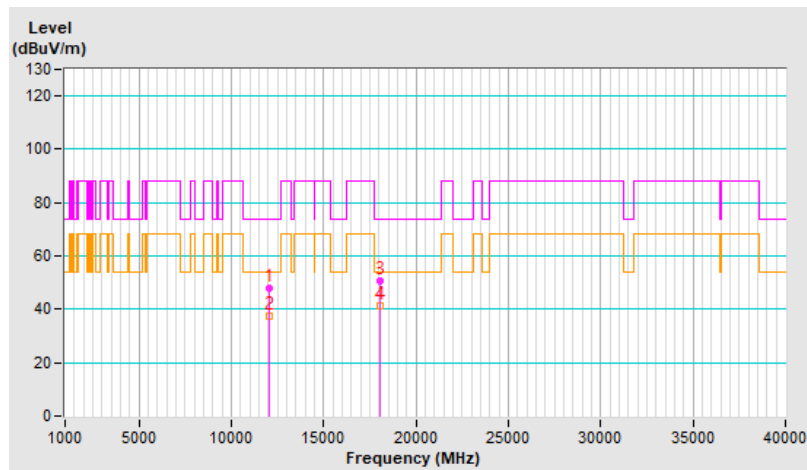


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	47.4 PK	74.0	-26.6	2.13 V	149	31.0	16.4
2	12050.00	37.1 AV	54.0	-16.9	2.13 V	149	20.7	16.4
3	18075.00	52.2 PK	74.0	-21.8	1.62 V	35	55.8	-3.6
4	18075.00	41.7 AV	54.0	-12.3	1.62 V	35	45.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

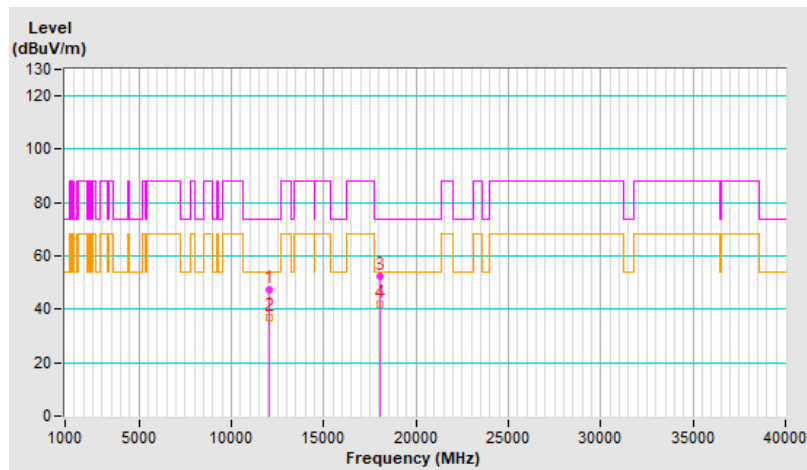


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	12690.00	47.9 PK	74.0	-26.1	3.01 H	105	32.6	15.3
2	12690.00	37.6 AV	54.0	-16.4	3.01 H	105	22.3	15.3
3	19035.00	50.6 PK	74.0	-23.4	1.54 H	177	53.8	-3.2
4	19035.00	41.2 AV	54.0	-12.8	1.54 H	177	44.4	-3.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

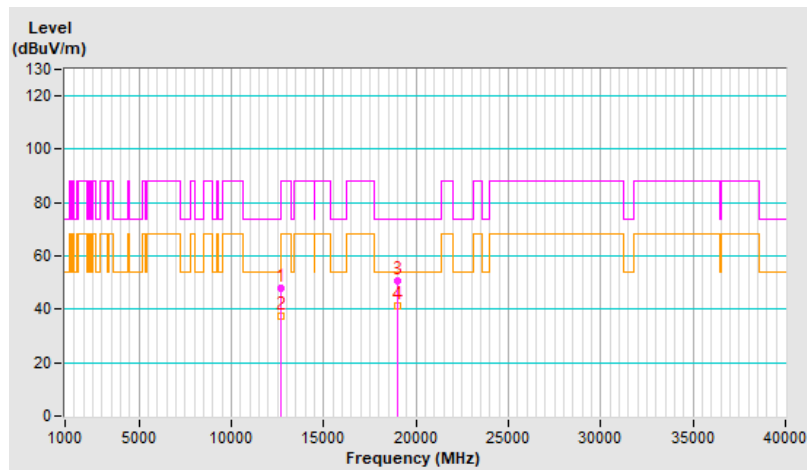


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	47.8 PK	74.0	-26.2	2.10 V	125	32.5	15.3
2	12690.00	37.3 AV	54.0	-16.7	2.10 V	125	22.0	15.3
3	19035.00	52.5 PK	74.0	-21.5	1.62 V	27	55.7	-3.2
4	19035.00	41.8 AV	54.0	-12.2	1.62 V	27	45.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

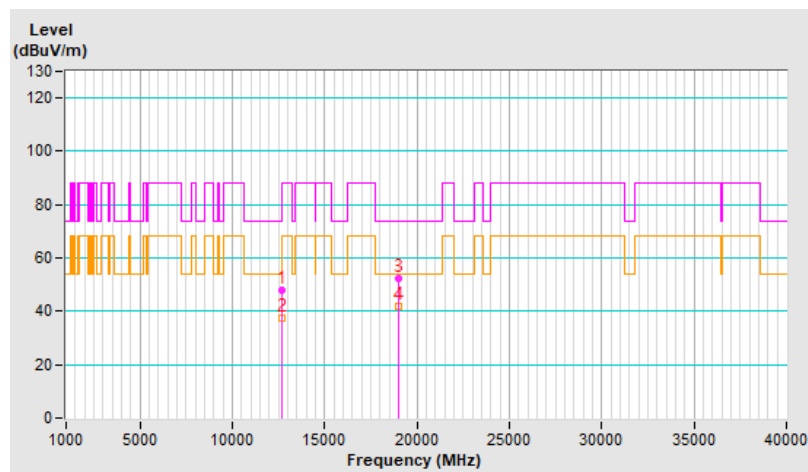


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#13010.00	48.2 PK	88.2	-40.0	2.93 H	117	31.9	16.3
2	#13010.00	37.7 AV	68.2	-30.5	2.93 H	117	21.4	16.3
3	19515.00	50.8 PK	74.0	-23.2	1.47 H	157	54.6	-3.8
4	19515.00	41.5 AV	54.0	-12.5	1.47 H	157	45.3	-3.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

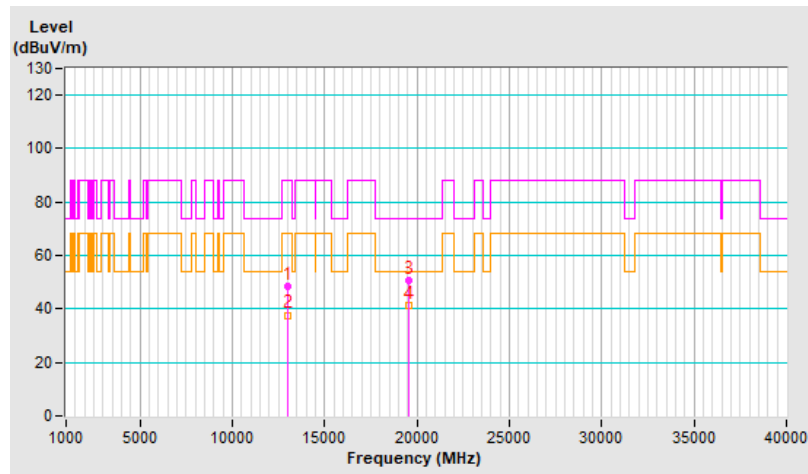




RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	47.9 PK	88.2	-40.3	2.05 V	119	31.6	16.3
2	#13010.00	37.3 AV	68.2	-30.9	2.05 V	119	21.0	16.3
3	19515.00	52.8 PK	74.0	-21.2	1.57 V	28	56.6	-3.8
4	19515.00	42.3 AV	54.0	-11.7	1.57 V	28	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# #": The radiated frequency is out of the restricted band.

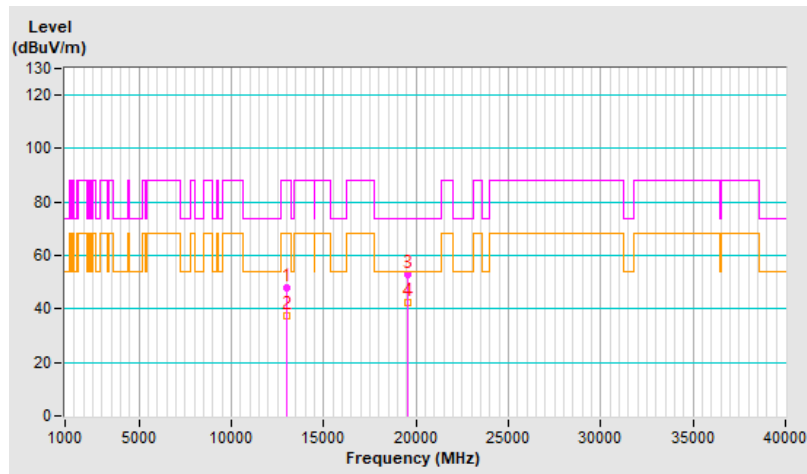

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 71% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	48.6 PK	74.0	-25.4	2.93 H	124	30.8	17.8
2	13330.00	37.9 AV	54.0	-16.1	2.93 H	124	20.1	17.8
3	19995.00	50.5 PK	74.0	-23.5	1.54 H	178	53.7	-3.2
4	19995.00	41.5 AV	54.0	-12.5	1.54 H	178	44.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

