

## Plots of System Verification

---

### Appendix A. Plots of System Verification

The plots for system verification are shown as follows.

# Plots of System Verification

## Measurement Report S01 System Check\_H2450\_231214 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			2450.0	7.71	1.86	41.2

## Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H06T27N6 , 2023-Dec-14	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

## Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 84.0	35.0 x 35.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

## Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-14	2023-12-14
psSAR1g [W/kg]	2.40	2.41
psSAR10g [W/kg]	1.14	1.12
Power Drift [dB]	0.01	-0.01

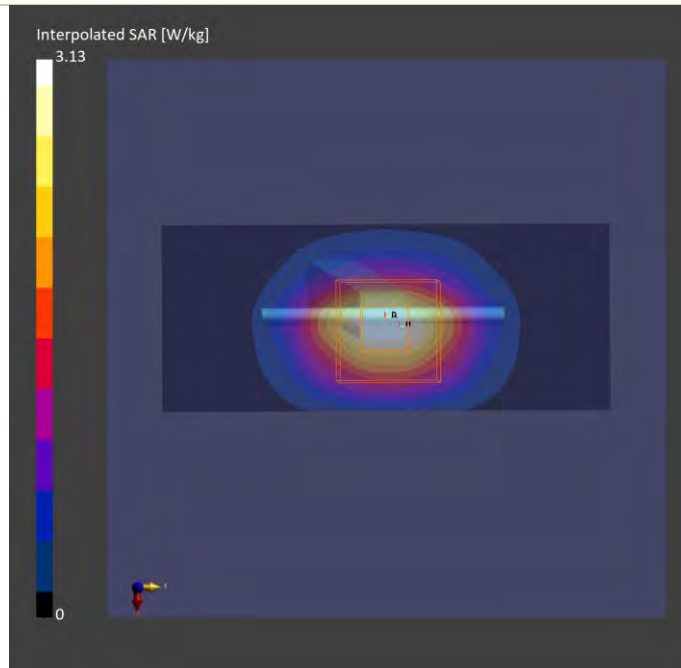

## Plots of System Verification

### Measurement Report

S02 System Check\_H5250\_231215

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5250.000, 0	5.39	4.69	35.6

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6 , 2023-Dec-15	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-15	2023-12-15
psSAR1g [W/kg]	3.62	3.91
psSAR10g [W/kg]	1.06	1.12
Power Drift [dB]	0.01	0.01

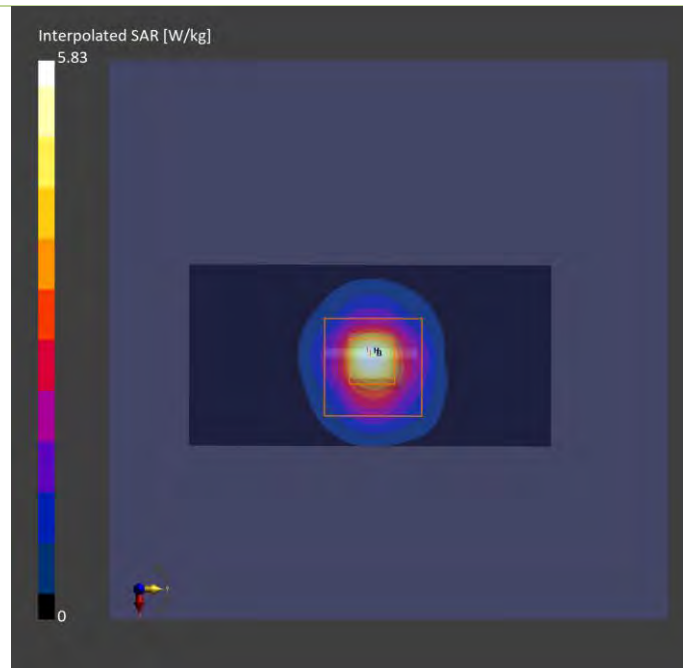

## Plots of System Verification

### Measurement Report S03 System Check\_H5600\_231216 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 300.0		Phone

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5600.000, 0	4.75	5.09	34.3

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6 , 2023-Dec-16	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-16	2023-12-16
psSAR1g [W/kg]	4.03	4.32
psSAR10g [W/kg]	1.18	1.24
Power Drift [dB]	-0.02	-0.01

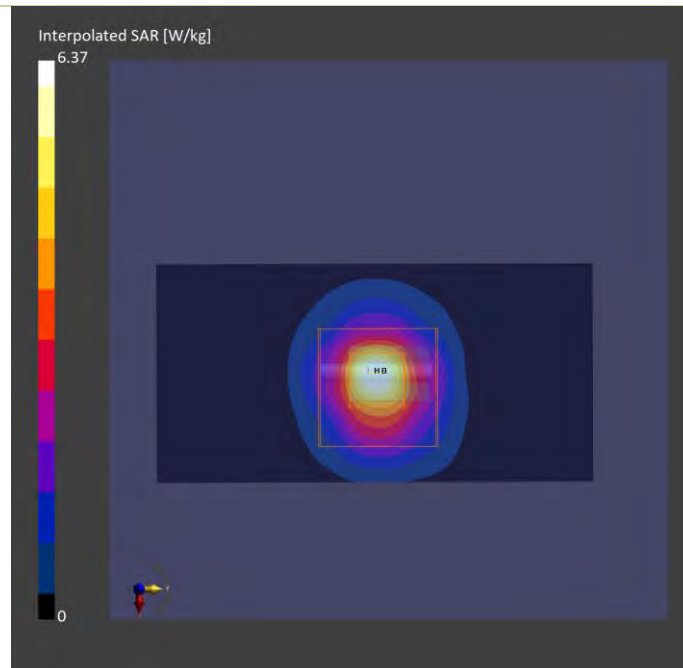

# Plots of System Verification

## Measurement Report S05 System Check\_H5800\_231217 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.88	5.07	33.9

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-17	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-17	2023-12-17
psSAR1g [W/kg]	3.36	3.82
psSAR10g [W/kg]	1.01	1.08
Power Drift [dB]	-0.01	-0.02

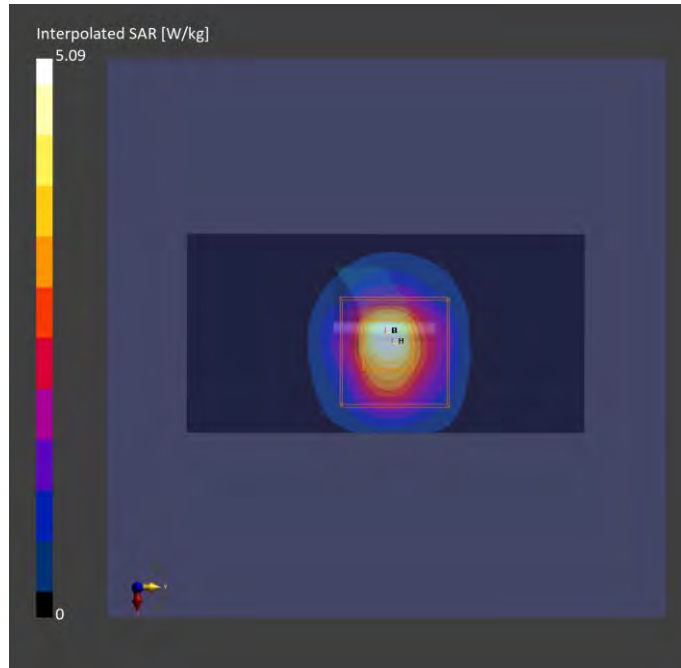

## Plots of System Verification

### Measurement Report

S06 System Check\_H5800\_231218

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	5800.000, 0	4.88	5.19	36.0

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-18	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18	2023-12-18
psSAR1g [W/kg]	3.85	3.89
psSAR10g [W/kg]	1.08	1.05
Power Drift [dB]	0.11	0.12

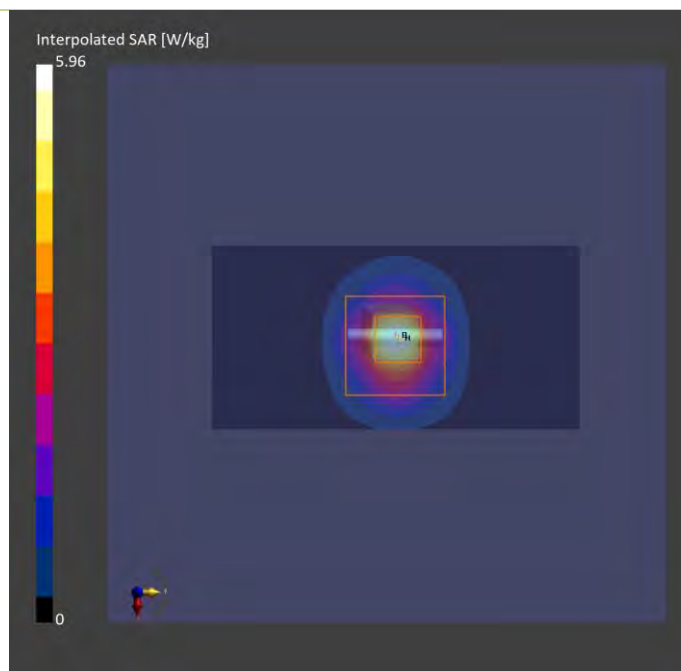

## Plots of System Verification

### Measurement Report

S07 System Check\_H2450\_231208

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				2450.0	7.71	1.83	39.2

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H06T27N6 , 2023-Dec-08	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 84.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-08	2023-12-08
psSAR1g [W/kg]	2.31	2.38
psSAR10g [W/kg]	1.11	1.09
Power Drift [dB]	0.01	0.01

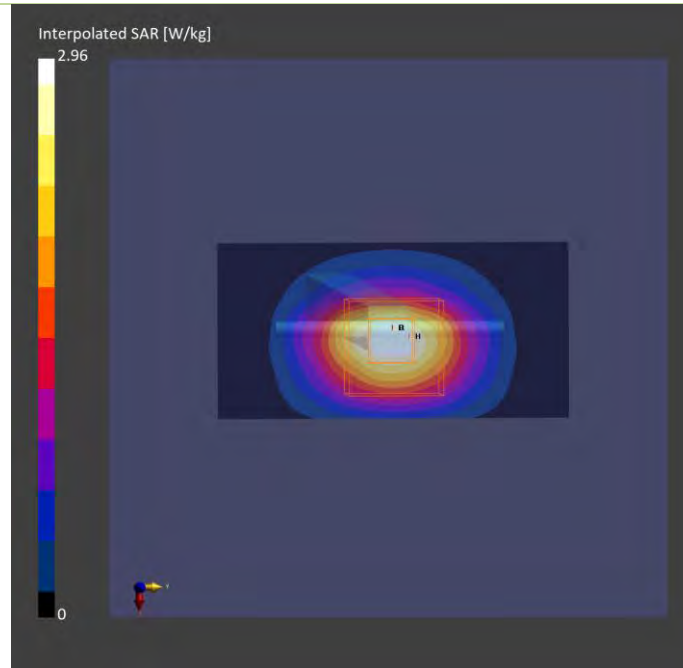

# Plots of System Verification

## Measurement Report S08 System Check\_H6500\_231219 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	50.0 x 10.0 x 8.0		

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				6500.0	5.35	6.12	32.7

## Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6 , 2023-Dec-19	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

## Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

## Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-19	2023-12-19
psSAR1g [W/kg]	25.5	29.5
psSAR10g [W/kg]	5.05	5.39
psAPD (1.0cm2, sq) [W/m2]		295
psAPD (4.0cm2, sq) [W/m2]		133
Power Drift [dB]	-0.02	0.13

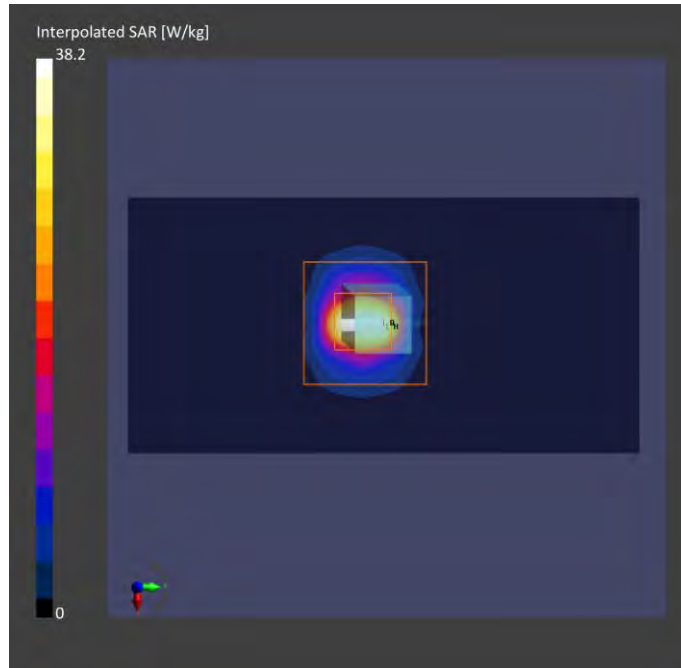



# Plots of System Verification

## Measurement Report S08\_PD\_System Check\_10 GHz\_2023.12.25 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	Phone

## Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 10.0	Validation band	CW, 0--	10000.0, 10000	1.0

## Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

## Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	5.55

## Measurement Results

	5G Scan
Date	2023-12-25
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	53.8
psPDtot+ [W/m <sup>2</sup> ]	55.6
psPDmod+ [W/m <sup>2</sup> ]	55.8
E <sub>max</sub> [V/m]	151
Power Drift [dB]	0.02

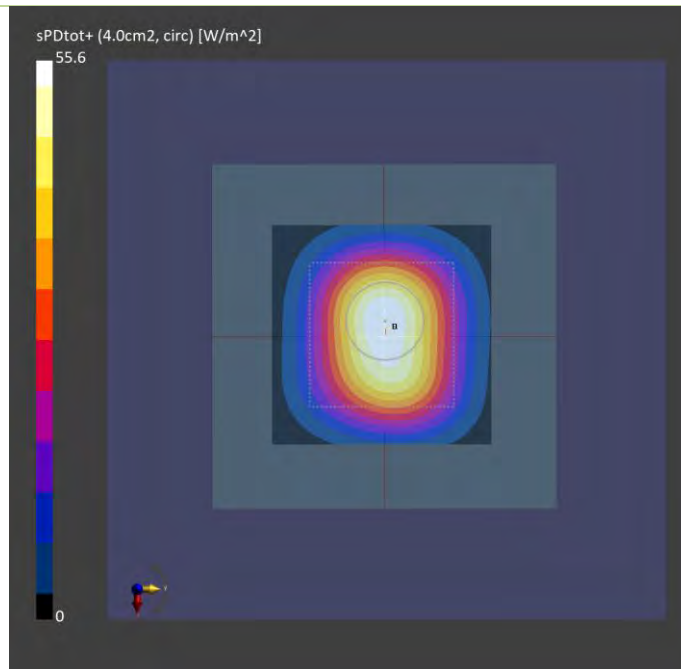

### Appendix B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

## Plots of Measurement

### Measurement Report

P01 WLAN2.4G\_802.11n HT40\_Bottom Side\_5mm\_Ch6\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	WLAN 2.4GHz	WLAN, 10599-AAD	2437.000, 6	7.71	1.85	41.2

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H06T27N6, 2023-Dec-14	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 288.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-14	2023-12-14
psSAR1g [W/kg]	0.736	0.756
psSAR10g [W/kg]	0.394	0.404
Power Drift [dB]	0.04	0.10
M2/M1 [%]		77.1
Dist 3dB Peak [mm]		10.0

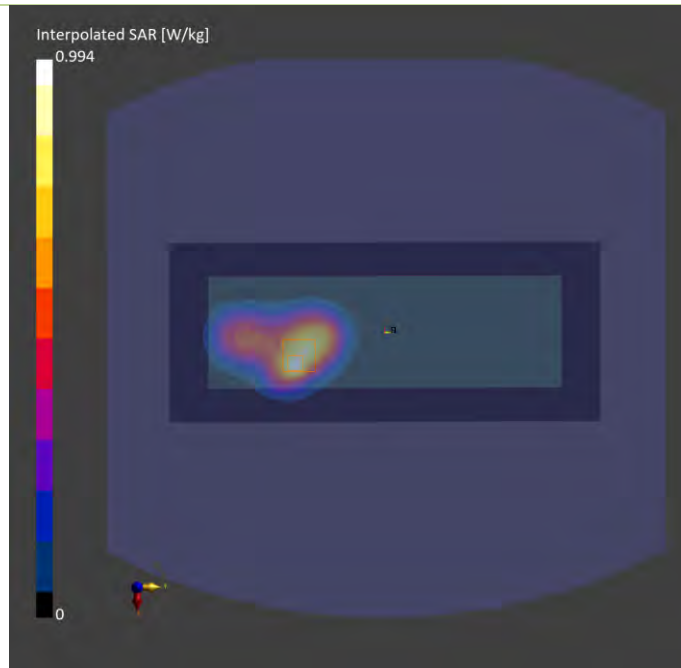

# Plots of Measurement

## Measurement Report

P02 WLAN5.3G\_802.11ac VHT160\_Bottom Side\_5mm\_Ch50\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	WLAN 5GHz	WLAN, 10554-AAE	5250.000, 50	5.39	4.69	35.6

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-15	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-15	2023-12-15
psSAR1g [W/kg]	0.679	0.707
psSAR10g [W/kg]	0.270	0.279
Power Drift [dB]	0.06	0.18
M2/M1 [%]		61.5
Dist 3dB Peak [mm]		9.0

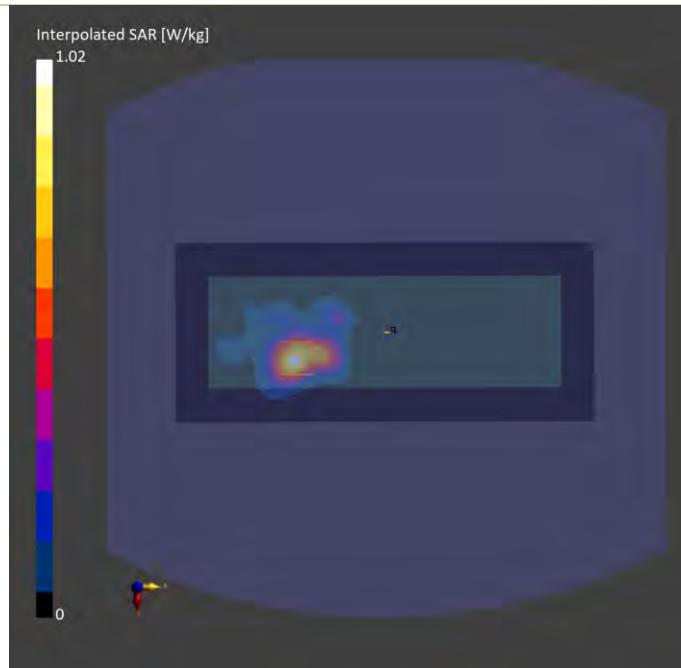

## Plots of Measurement

### Measurement Report

P03 WLAN5.6G\_802.11ac VHT160\_Bottom Side\_5mm\_Ch114\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	WLAN 5GHz	WLAN, 10554-AAE	5570.000, 114	4.75	5.05	34.4

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-16	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-16	2023-12-16
psSAR1g [W/kg]	0.685	0.721
psSAR10g [W/kg]	0.270	0.278
Power Drift [dB]	0.15	-0.11
M2/M1 [%]		59.9
Dist 3dB Peak [mm]		8.9

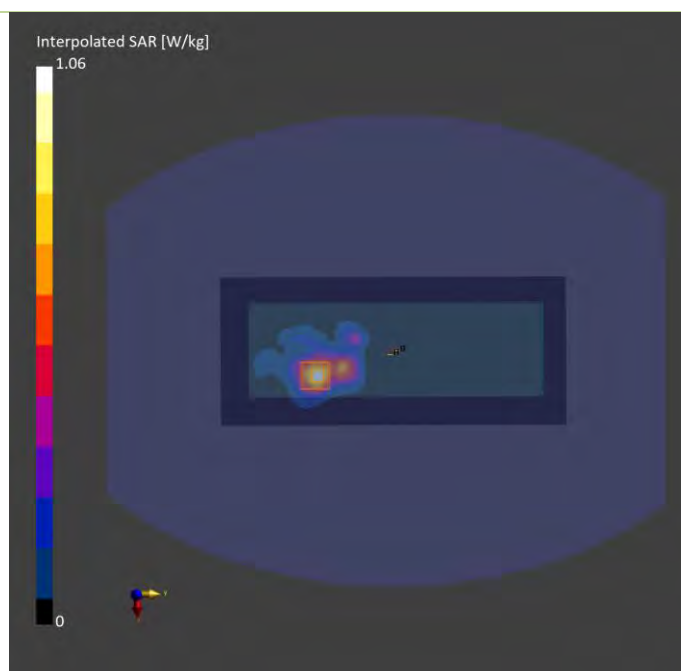

## Plots of Measurement

### Measurement Report

P05 WLAN5.8G\_802.11ac VHT80\_Bottom Side\_5mm\_Ch155\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	4.88	5.04	34.0

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-17	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-17	2023-12-17
psSAR1g [W/kg]	0.676	0.721
psSAR10g [W/kg]	0.236	0.252
Power Drift [dB]	-0.10	0.08
M2/M1 [%]		57.6
Dist 3dB Peak [mm]		7.9

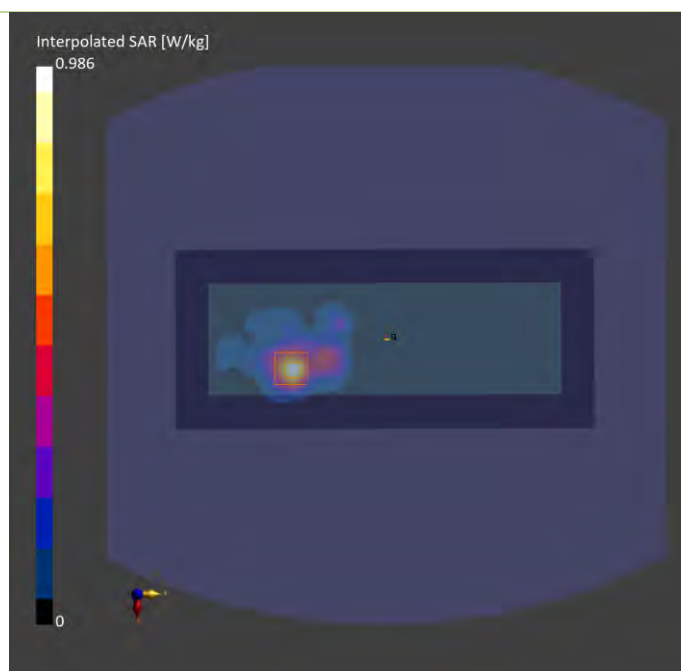

## Plots of Measurement

### Measurement Report

**P06 WLAN5.9G\_802.11ac VHT160\_Bottom Side\_5mm\_Ch163\_2T2S\_Ant 0**

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	WLAN 5GHz	WLAN, 10554-AAE	5815.000, 163	4.88	5.21	36.0

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6, 2023-Dec-18	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 280.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18	2023-12-18
psSAR1g [W/kg]	0.698	0.713
psSAR10g [W/kg]	0.252	0.263
Power Drift [dB]	0.17	-0.08
M2/M1 [%]		57.1
Dist 3dB Peak [mm]		7.6

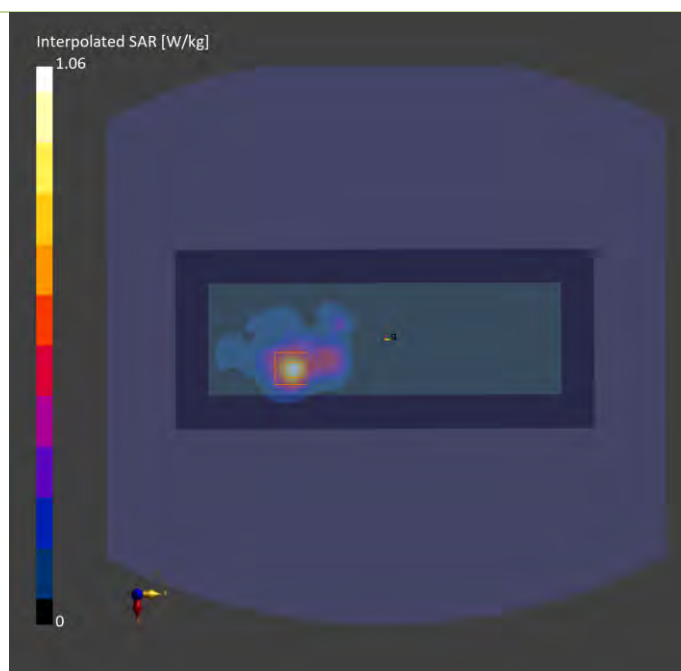

## Plots of Measurement

### Measurement Report

#### P07 BT\_BDR\_Bottom Side\_5mm\_Ch78\_Ant 1

#### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090671,	236.0 x 48.0 x 75.0		Module

#### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.000, 78	7.71	1.86	39.1

#### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H06T27N6 , 2023-Dec-08	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

#### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

#### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-08	2023-12-08
psSAR1g [W/kg]	0.088	0.101
psSAR10g [W/kg]	0.048	0.051
Power Drift [dB]	-0.07	0.09
M2/M1 [%]		76.0
Dist 3dB Peak [mm]		10.3

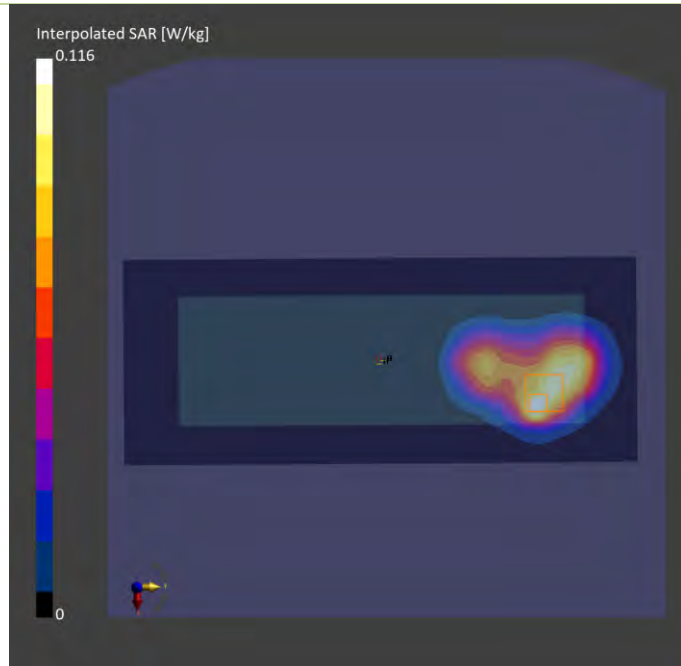



## Plots of Measurement

### Measurement Report

P08 WLAN6G\_802.11ax HE160\_Bottom Side\_5mm\_Ch15\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067,	236.0 x 48.0 x 75.0		Module

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom Side, 5.00	U-NII-5	WLAN, 10755-AAC	6025.000, 15	5.35	5.56	33.6

### Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2105	H51T72N6 , 2023-Dec-19	EX3DV4 - SN7554, 2023-09-19	DAE4 Sn1431, 2023-08-24

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 285.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-19	2023-12-19
psSAR1g [W/kg]	0.702	0.726
psSAR10g [W/kg]	0.255	0.262
psAPD (1.0cm2, sq) [W/m2]		7.36
psAPD (4.0cm2, sq) [W/m2]		5.90
Power Drift [dB]	0.05	-0.15
M2/M1 [%]		55.1
Dist 3dB Peak [mm]		8.0

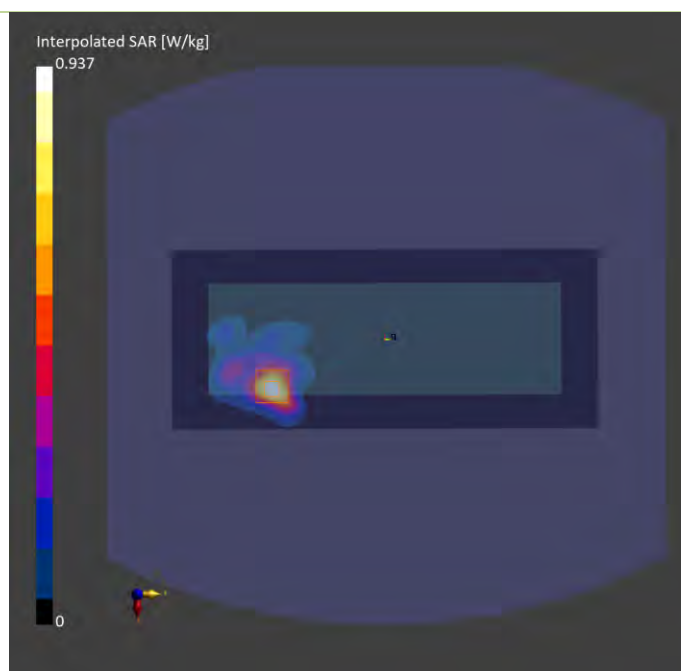

## Plots of Measurement

### Measurement Report

P08 WLAN6G\_802.11ax HE160\_Bottom Side\_5mm\_Ch15\_2T2S\_Ant 0

### Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BARR-WTW-P23110067	236.0 x 75.0 x 48.0		Module

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Bottom Side, 5.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1029	--Air--	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1431, 2023-08-24

### Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	5.0

### Measurement Results

	5G Scan
Date	2023-12-25
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	2.89
psPDtot+ [W/m <sup>2</sup> ]	2.94
psPDmod+ [W/m <sup>2</sup> ]	3.59
E <sub>max</sub> [V/m]	32.4
Power Drift [dB]	-0.04

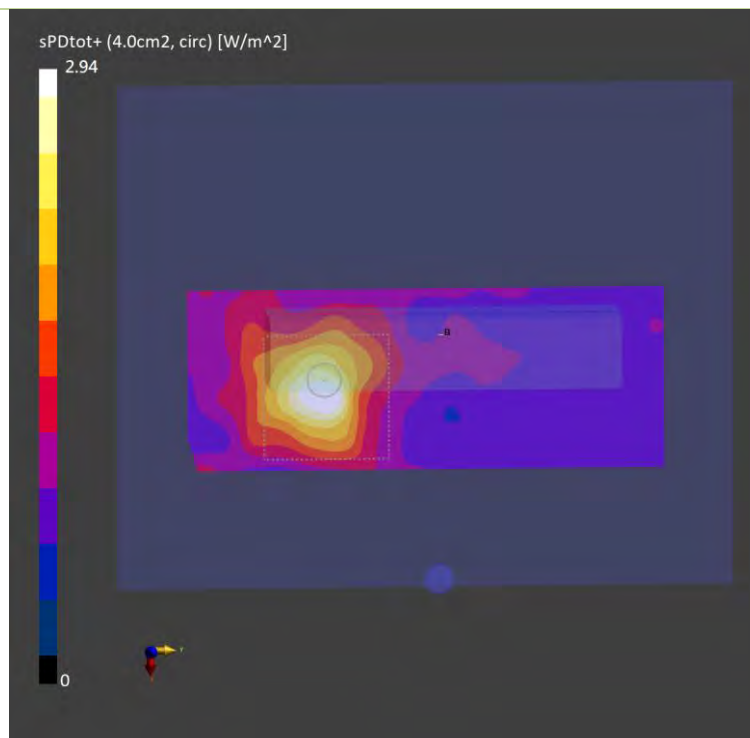

## **Appendix D. Maximum Target Conducted Power**

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Tune-up Power (1T1S)			
WLAN 2.4GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11b	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11g	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11n HT20	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11n HT40	3	2422	15.5
	6	2437	15.5
	9	2452	15.5
	10	2457	15.5
	11	2462	15.5
802.11ac VHT20	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11ac VHT40	3	2422	15.5
	6	2437	15.5
	9	2452	15.5
	10	2457	15.5
	11	2462	15.5
802.11ax HE20	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11ax HE40	3	2422	15.5
	6	2437	15.5
	9	2452	15.5
	10	2457	15.5
	11	2462	15.5
802.11be EHT20	1	2412	15.5
	6	2437	15.5
	11	2462	15.5
	12	2467	15.5
	13	2472	15.5
802.11be EHT40	3	2422	15.5
	6	2437	15.5
	9	2452	15.5
	10	2457	15.5
	11	2462	15.5

Tune-up Power (1T1S)			
Bluetooth			
Mode	Channel	Frequency	Max Tune-up
BR / EDR	0	2402	13.0
	39	2441	13.0
	78	2480	13.0
LE	0	2402	13.0
	19	2440	13.0
	39	2480	13.0

Tune-up Power (1T1S)			
WLAN 5.2GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	36	5180	14.0
	40	5200	14.0
	44	5220	14.0
	48	5240	14.0
802.11n HT20	36	5180	14.0
	40	5200	14.0
	44	5220	14.0
	48	5240	14.0
802.11n HT40	38	5190	14.0
	46	5230	14.0
802.11ac VHT20	36	5180	14.0
	40	5200	14.0
	44	5220	14.0
	48	5240	14.0
802.11ac VHT40	38	5190	14.0
	46	5230	14.0
802.11ac VHT80	42	5210	14.0
802.11ax HE20	36	5180	14.0
	40	5200	14.0
	44	5220	14.0
	48	5240	14.0
802.11ax HE40	38	5190	14.0
	46	5230	14.0
802.11ax HE80	42	5210	14.0
802.11be EHT20	36	5180	14.0
	40	5200	14.0
	44	5220	14.0
	48	5240	14.0
802.11be EHT40	38	5190	14.0
	46	5230	14.0
802.11be EHT80	42	5210	14.0

Tune-up Power (1T1S)			
WLAN 5.3GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	52	5260	14.0
	56	5280	14.0
	60	5300	14.0
	64	5320	14.0
802.11n HT20	52	5260	14.0
	56	5280	14.0
	60	5300	14.0
	64	5320	14.0
802.11n HT40	54	5270	14.0
	62	5310	14.0
802.11ac VHT20	52	5260	14.0
	56	5280	14.0
	60	5300	14.0
	64	5320	14.0
802.11ac VHT40	54	5270	14.0
	62	5310	14.0
802.11ac VHT80	58	5290	14.0
802.11ac VHT160	50	5250	14.0
802.11ax HE20	52	5260	14.0
	56	5280	14.0
	60	5300	14.0
	64	5320	14.0
802.11ax HE40	54	5270	14.0
	62	5310	14.0
802.11ax HE80	58	5290	14.0
802.11ax HE160	50	5250	14.0
802.11be EHT20	52	5260	14.0
	56	5280	14.0
	60	5300	14.0
	64	5320	14.0
802.11be EHT40	54	5270	14.0
	62	5310	14.0
802.11be EHT80	58	5290	14.0
802.11be EHT160	50	5250	14.0

Tune-up Power (1T1S)			
WLAN 5.6GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	100	5500	14.0
	116	5580	14.0
	120	5600	14.0
	124	5620	14.0
	132	5660	14.0
	140	5700	14.0
	144	5720	14.0
802.11n HT20	100	5500	14.0
	116	5580	14.0
	120	5600	14.0
	124	5620	14.0
	132	5660	14.0
	140	5700	14.0
	144	5720	14.0
802.11n HT40	102	5510	14.0
	110	5550	14.0
	118	5590	14.0
	126	5630	14.0
	134	5670	14.0
	142	5710	14.0
802.11ac VHT20	100	5500	14.0
	116	5580	14.0
	120	5600	14.0
	124	5620	14.0
	132	5660	14.0
	140	5700	14.0
	144	5720	14.0
802.11ac VHT40	102	5510	14.0
	110	5550	14.0
	118	5590	14.0
	126	5630	14.0
	134	5670	14.0
	142	5710	14.0
802.11ac VHT80	106	5530	14.0
	122	5610	14.0
	138	5690	14.0
802.11ac VHT160	114	5570	14.0
802.11ax HE20	100	5500	14.0
	116	5580	14.0
	120	5600	14.0
	124	5620	14.0
	132	5660	14.0
	140	5700	14.0
	144	5720	14.0
802.11ax HE40	102	5510	14.0
	110	5550	14.0
	118	5590	14.0
	126	5630	14.0
	134	5670	14.0
	142	5710	14.0
802.11ax HE80	106	5530	14.0
	122	5610	14.0
	138	5690	14.0
802.11ax HE160	114	5570	14.0
802.11be EHT20	100	5500	14.0
	116	5580	14.0
	120	5600	14.0
	124	5620	14.0
	132	5660	14.0
	140	5700	14.0
	144	5720	14.0
802.11be EHT40	102	5510	14.0
	110	5550	14.0
	118	5590	14.0
	126	5630	14.0
	134	5670	14.0
	142	5710	14.0
802.11be EHT80	106	5530	14.0
	122	5610	14.0
	138	5690	14.0
802.11be EHT160	114	5570	14.0



Tune-up Power (1T1S)			
WLAN 5.8GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	149	5745	14.0
	153	5765	14.0
	157	5785	14.0
	161	5805	14.0
	165	5825	14.0
802.11n HT20	149	5745	14.0
	153	5765	14.0
	157	5785	14.0
	161	5805	14.0
	165	5825	14.0
802.11n HT40	151	5755	14.0
	159	5795	14.0
802.11ac VHT20	149	5745	14.0
	153	5765	14.0
	157	5785	14.0
	161	5805	14.0
	165	5825	14.0
802.11ac VHT40	151	5755	14.0
	159	5795	14.0
802.11ac VHT80	155	5775	14.0
802.11ax HE20	149	5745	14.0
	153	5765	14.0
	157	5785	14.0
	161	5805	14.0
	165	5825	14.0
802.11ax HE40	151	5755	14.0
	159	5795	14.0
802.11ax HE80	155	5775	14.0
802.11be EHT20	149	5745	14.0
	153	5765	14.0
	157	5785	14.0
	161	5805	14.0
	165	5825	14.0
802.11be EHT40	151	5755	14.0
	159	5795	14.0
802.11be EHT80	155	5775	14.0

Tune-up Power (1T1S)			
WLAN 5.9GHz			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	169	5845	14.0
	173	5865	14.0
	177	5885	14.0
802.11n HT20	169	5845	14.0
	173	5865	14.0
	177	5885	14.0
802.11n HT40	167	5835	14.0
	175	5875	14.0
802.11ac VHT20	169	5845	14.0
	173	5865	14.0
	177	5885	14.0
802.11ac VHT40	167	5835	14.0
	175	5875	14.0
802.11ac VHT80	171	5855	14.0
802.11ac VHT160	163	5815	14.0
802.11ax HE20	169	5845	14.0
	173	5865	14.0
	177	5885	14.0
802.11ax HE40	167	5835	14.0
	175	5875	14.0
802.11ax HE80	171	5855	14.0
802.11ax HE160	163	5815	14.0
802.11be EHT20	169	5845	14.0
	173	5865	14.0
	177	5885	14.0
802.11be EHT40	167	5835	14.0
	175	5875	14.0
802.11be EHT80	171	5855	14.0
802.11be EHT160	163	5815	14.0

Tune-up Power (1T1S)_SP			
UNII-5			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	1	5955	14.5
	5	5975	14.5
	9	5995	14.5
	13	6015	14.5
	17	6035	14.5
	21	6055	14.5
	25	6075	14.5
	29	6095	14.5
	33	6115	14.5
	37	6135	14.5
	41	6155	14.5
	45	6175	14.5
	49	6195	14.5
	53	6215	14.5
	57	6235	14.5
	61	6255	14.5
	65	6275	14.5
	69	6295	14.5
	73	6315	14.5
77	6335	14.5	
81	6355	14.5	
85	6375	14.5	
89	6395	14.5	
93	6415	14.5	
802.11ax HE20	1	5955	14.5
	5	5975	14.5
	9	5995	14.5
	13	6015	14.5
	17	6035	14.5
	21	6055	14.5
	25	6075	14.5
	29	6095	14.5
	33	6115	14.5
	37	6135	14.5
	41	6155	14.5
	45	6175	14.5
	49	6195	14.5
	53	6215	14.5
	57	6235	14.5
	61	6255	14.5
	65	6275	14.5
	69	6295	14.5
	73	6315	14.5
77	6335	14.5	
81	6355	14.5	
85	6375	14.5	
89	6395	14.5	
93	6415	14.5	
802.11be EHT20	1	5955	14.5
	5	5975	14.5
	9	5995	14.5
	13	6015	14.5
	17	6035	14.5
	21	6055	14.5
	25	6075	14.5
	29	6095	14.5
	33	6115	14.5
	37	6135	14.5
	41	6155	14.5
	45	6175	14.5
	49	6195	14.5
	53	6215	14.5
	57	6235	14.5
	61	6255	14.5
	65	6275	14.5
	69	6295	14.5
	73	6315	14.5
77	6335	14.5	
81	6355	14.5	
85	6375	14.5	
89	6395	14.5	
93	6415	14.5	

Tune-up Power (1T1S)_SP			
UNII-5			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11ax HE40	3	5965	14.5
	11	6005	14.5
	19	6045	14.5
	27	6085	14.5
	35	6125	14.5
	43	6165	14.5
	51	6205	14.5
	59	6245	14.5
	67	6285	14.5
	75	6325	14.5
	83	6365	14.5
802.11ax HE80	91	6405	14.5
	7	5985	14.5
	23	6065	14.5
	39	6145	14.5
	55	6225	14.5
	71	6305	14.5
802.11ax HE160	87	6385	14.5
	15	6025	14.5
	47	6185	14.5
802.11be EHT40	79	6345	14.5
	3	5965	14.5
	11	6005	14.5
	19	6045	14.5
	27	6085	14.5
	35	6125	14.5
	43	6165	14.5
	51	6205	14.5
	59	6245	14.5
	67	6285	14.5
	75	6325	14.5
802.11be EHT80	83	6365	14.5
	91	6405	14.5
	7	5985	14.5
	23	6065	14.5
	39	6145	14.5
	55	6225	14.5
802.11be EHT160	71	6305	14.5
	87	6385	14.5
	15	6025	14.5
	47	6185	14.5
	79	6345	14.5

Tune-up Power (1T1S)_SP			
UNII-7			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	117	6535	14.5
	121	6555	14.5
	125	6575	14.5
	129	6595	14.5
	133	6615	14.5
	137	6635	14.5
	141	6655	14.5
	145	6675	14.5
	149	6695	14.5
	153	6715	14.5
	157	6735	14.5
	161	6755	14.5
	165	6775	14.5
	169	6795	14.5
	173	6815	14.5
802.11ax HE20	177	6835	14.5
	181	6855	14.5
	185	6875	14.5
	117	6535	14.5
	121	6555	14.5
	125	6575	14.5
	129	6595	14.5
	133	6615	14.5
	137	6635	14.5
	141	6655	14.5
	145	6675	14.5
	149	6695	14.5
	153	6715	14.5
	157	6735	14.5
	161	6755	14.5
802.11ax HE40	165	6775	14.5
	169	6795	14.5
	173	6815	14.5
	177	6835	14.5
	181	6855	14.5
	185	6875	14.5
	123	6565	14.5
	131	6605	14.5
802.11ax HE80	139	6645	14.5
	147	6685	14.5
	155	6725	14.5
	163	6765	14.5
	171	6805	14.5
	179	6845	14.5
	187	6885	14.5
802.11ax HE160	135	6625	14.5
	151	6705	14.5
	167	6785	14.5
802.11be EHT20	183	6865	14.5
	143	6665	14.5
	175	6825	14.5
	117	6535	14.5
	121	6555	14.5
	125	6575	14.5
	129	6595	14.5
	133	6615	14.5
	137	6635	14.5
	141	6655	14.5
	145	6675	14.5
	149	6695	14.5
	153	6715	14.5
	157	6735	14.5
	802.11be EHT40	161	6755
165		6775	14.5
169		6795	14.5
173		6815	14.5
177		6835	14.5
181		6855	14.5
185		6875	14.5
123		6565	14.5
802.11be EHT80	131	6605	14.5
	139	6645	14.5
	147	6685	14.5
	155	6725	14.5
	163	6765	14.5
	171	6805	14.5
	179	6845	14.5
802.11be EHT160	187	6885	14.5
	135	6625	14.5
	151	6705	14.5
802.11be EHT160	167	6785	14.5
	183	6865	14.5
	143	6665	14.5
	175	6825	14.5

Tune-up Power (1T1S) LPI			
UNII-5			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	1	5955	7.5
	5	5975	7.5
	9	5995	7.5
	13	6015	7.5
	17	6035	7.5
	21	6055	7.5
	25	6075	7.5
	29	6095	7.5
	33	6115	7.5
	37	6135	7.5
	41	6155	7.5
	45	6175	7.5
	49	6195	7.5
	53	6215	7.5
	57	6235	7.5
	61	6255	7.5
	65	6275	7.5
	69	6295	7.5
73	6315	7.5	
77	6335	7.5	
81	6355	7.5	
85	6375	7.5	
89	6395	7.5	
93	6415	7.5	
802.11ax HE20	1	5955	7.5
	5	5975	7.5
	9	5995	7.5
	13	6015	7.5
	17	6035	7.5
	21	6055	7.5
	25	6075	7.5
	29	6095	7.5
	33	6115	7.5
	37	6135	7.5
	41	6155	7.5
	45	6175	7.5
	49	6195	7.5
	53	6215	7.5
	57	6235	7.5
	61	6255	7.5
	65	6275	7.5
	69	6295	7.5
73	6315	7.5	
77	6335	7.5	
81	6355	7.5	
85	6375	7.5	
89	6395	7.5	
93	6415	7.5	
802.11be EHT20	1	5955	7.5
	5	5975	7.5
	9	5995	7.5
	13	6015	7.5
	17	6035	7.5
	21	6055	7.5
	25	6075	7.5
	29	6095	7.5
	33	6115	7.5
	37	6135	7.5
	41	6155	7.5
	45	6175	7.5
	49	6195	7.5
	53	6215	7.5
	57	6235	7.5
	61	6255	7.5
	65	6275	7.5
	69	6295	7.5
73	6315	7.5	
77	6335	7.5	
81	6355	7.5	
85	6375	7.5	
89	6395	7.5	
93	6415	7.5	

Tune-up Power (1T1S) LPI			
UNII-5			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11ax HE40	3	5965	10.0
	11	6005	10.0
	19	6045	10.0
	27	6085	10.0
	35	6125	10.0
	43	6165	10.0
	51	6205	10.0
	59	6245	10.0
	67	6285	10.0
	75	6325	10.0
	83	6365	10.0
802.11ax HE80	91	6405	10.0
	7	5985	13.0
	23	6065	13.0
	39	6145	13.0
	55	6225	13.0
	71	6305	13.0
802.11ax HE160	87	6385	13.0
	15	6025	14.5
	47	6185	14.5
	79	6345	14.5
802.11be EHT40	3	5965	10.0
	11	6005	10.0
	19	6045	10.0
	27	6085	10.0
	35	6125	10.0
	43	6165	10.0
	51	6205	10.0
	59	6245	10.0
	67	6285	10.0
	75	6325	10.0
	83	6365	10.0
802.11be EHT80	91	6405	10.0
	7	5985	13.0
	23	6065	13.0
	39	6145	13.0
	55	6225	13.0
	71	6305	13.0
802.11be EHT160	87	6385	13.0
	15	6025	14.5
	47	6185	14.5
	79	6345	14.5

Tune-up Power (1T1S) LPI			
UNII-6			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	97	6435	7.5
	101	6455	7.5
	105	6475	7.5
	109	6495	7.5
	113	6515	7.5
802.11ax HE20	97	6435	7.5
	101	6455	7.5
	105	6475	7.5
	109	6495	7.5
	113	6515	7.5
802.11ax HE40	99	6445	10.0
	107	6485	10.0
	115	6525	10.0
802.11ax HE80	103	6465	13.0
	119	6545	13.0
802.11ax HE160	111	6505	14.5
802.11be EHT20	97	6435	7.5
	101	6455	7.5
	105	6475	7.5
	109	6495	7.5
	113	6515	7.5
802.11be EHT40	99	6445	10.0
	107	6485	10.0
	115	6525	10.0
802.11be EHT80	103	6465	13.0
	119	6545	13.0
802.11be EHT160	111	6505	14.5



Tune-up Power (1T1S) LPI			
UNII-7			
Mode	Channel	Frequency	SISO Ant 0 &1 Max Tune up
802.11a	117	6535	7.5
	121	6555	7.5
	125	6575	7.5
	129	6595	7.5
	133	6615	7.5
	137	6635	7.5
	141	6655	7.5
	145	6675	7.5
	149	6695	7.5
	153	6715	7.5
	157	6735	7.5
	161	6755	7.5
	165	6775	7.5
	169	6795	7.5
	173	6815	7.5
802.11ax HE20	177	6835	7.5
	181	6855	7.5
	185	6875	7.5
	117	6535	7.5
	121	6555	7.5
	125	6575	7.5
	129	6595	7.5
	133	6615	7.5
	137	6635	7.5
	141	6655	7.5
	145	6675	7.5
	149	6695	7.5
	153	6715	7.5
	157	6735	7.5
	161	6755	7.5
802.11ax HE40	165	6775	7.5
	169	6795	7.5
	173	6815	7.5
	177	6835	7.5
	181	6855	7.5
	185	6875	7.5
	123	6565	10.0
	131	6605	10.0
802.11ax HE80	139	6645	10.0
	147	6685	10.0
	155	6725	10.0
	163	6765	10.0
	171	6805	10.0
	179	6845	10.0
	187	6885	10.0
802.11ax HE160	135	6625	13.0
	151	6705	13.0
	167	6785	13.0
802.11be EHT20	183	6865	13.0
	143	6665	14.5
	175	6825	14.5
	117	6535	7.5
	121	6555	7.5
	125	6575	7.5
	129	6595	7.5
	133	6615	7.5
	137	6635	7.5
	141	6655	7.5
	145	6675	7.5
	149	6695	7.5
	153	6715	7.5
	157	6735	7.5
	161	6755	7.5
	802.11be EHT40	165	6775
169		6795	7.5
173		6815	7.5
177		6835	7.5
181		6855	7.5
185		6875	7.5
123		6565	10.0
131		6605	10.0
802.11be EHT80	139	6645	10.0
	147	6685	10.0
	155	6725	10.0
	163	6765	10.0
	171	6805	10.0
	179	6845	10.0
	187	6885	10.0
802.11be EHT160	135	6625	13.0
	151	6705	13.0
	167	6785	13.0
802.11be EHT160	183	6865	13.0
	143	6665	14.5
	175	6825	14.5
	175	6825	14.5

Tune-up Power (1T1S) LPI			
UNII-8			
Mode	Channel	Frequency	SISO Ant 0 Max Tune up
802.11a	189	6895	7.5
	193	6915	7.5
	197	6935	7.5
	201	6955	7.5
	205	6975	7.5
	209	6995	7.5
	213	7015	7.5
	217	7035	7.5
	221	7055	7.5
	225	7075	7.5
	229	7095	7.5
802.11ax HE20	233	7115	7.5
	189	6895	7.5
	193	6915	7.5
	197	6935	7.5
	201	6955	7.5
	205	6975	7.5
	209	6995	7.5
	213	7015	7.5
	217	7035	7.5
	221	7055	7.5
	225	7075	7.5
802.11ax HE40	229	7095	7.5
	233	7115	7.5
	195	6925	10.5
	203	6965	10.5
	211	7005	10.5
802.11ax HE80	219	7045	10.5
	227	7085	10.5
	199	6945	13.0
802.11ax HE160	215	7025	13.0
	207	6985	14.5
802.11be EHT20	189	6895	7.5
	193	6915	7.5
	197	6935	7.5
	201	6955	7.5
	205	6975	7.5
	209	6995	7.5
	213	7015	7.5
	217	7035	7.5
	221	7055	7.5
	225	7075	7.5
	229	7095	7.5
802.11be EHT40	233	7115	7.5
	195	6925	10.5
	203	6965	10.5
	211	7005	10.5
	219	7045	10.5
802.11be EHT80	227	7085	10.5
	199	6945	13.0
802.11be EHT160	215	7025	13.0
	207	6985	14.5

Tune-up Power (2T1S)					
WLAN 2.4GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.0	15.0	18.0
	13	2472	11.0	11.0	14.0
802.11g	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.5	15.5	18.5
	13	2472	14.0	14.0	17.0

Tune-up Power (2T1S)					
WLAN 5.2GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	14.0	14.0	17.0
	40	5200	14.0	14.0	17.0
	44	5220	14.0	14.0	17.0
	48	5240	14.0	14.0	17.0

Tune-up Power (2T1S)					
WLAN 5.3GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	14.0	14.0	17.0
	56	5280	14.0	14.0	17.0
	60	5300	14.0	14.0	17.0
	64	5320	14.0	14.0	17.0

Tune-up Power (2T1S)					
WLAN 5.6GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	14.0	14.0	17.0
	116	5580	14.0	14.0	17.0
	120	5600	14.0	14.0	17.0
	124	5620	14.0	14.0	17.0
	132	5660	14.0	14.0	17.0
	140	5700	14.0	14.0	17.0
	144	5720	14.0	14.0	17.0

Tune-up Power (2T1S)					
WLAN 5.8GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	14.0	14.0	17.0
	153	5765	14.0	14.0	17.0
	157	5785	14.0	14.0	17.0
	161	5805	14.0	14.0	17.0
	165	5825	14.0	14.0	17.0

Tune-up Power (2T1S)					
WLAN 5.9GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	14.0	14.0	17.0
	173	5865	14.0	14.0	17.0
	177	5885	14.0	14.0	17.0



Tune-up Power (2T1S)_SP					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	14.5	14.5	17.5
	5	5975	14.5	14.5	17.5
	9	5995	14.5	14.5	17.5
	13	6015	14.5	14.5	17.5
	17	6035	14.5	14.5	17.5
	21	6055	14.5	14.5	17.5
	25	6075	14.5	14.5	17.5
	29	6095	14.5	14.5	17.5
	33	6115	14.5	14.5	17.5
	37	6135	14.5	14.5	17.5
	41	6155	14.5	14.5	17.5
	45	6175	14.5	14.5	17.5
	49	6195	14.5	14.5	17.5
	53	6215	14.5	14.5	17.5
	57	6235	14.5	14.5	17.5
	61	6255	14.5	14.5	17.5
	65	6275	14.5	14.5	17.5
	69	6295	14.5	14.5	17.5
	73	6315	14.5	14.5	17.5
	77	6335	14.5	14.5	17.5
81	6355	14.5	14.5	17.5	
85	6375	14.5	14.5	17.5	
89	6395	14.5	14.5	17.5	
93	6415	14.5	14.5	17.5	

Tune-up Power (2T1S)_SP					
UNII-7					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	14.5	14.5	17.5
	121	6555	14.5	14.5	17.5
	125	6575	14.5	14.5	17.5
	129	6595	14.5	14.5	17.5
	133	6615	14.5	14.5	17.5
	137	6635	14.5	14.5	17.5
	141	6655	14.5	14.5	17.5
	145	6675	14.5	14.5	17.5
	149	6695	14.5	14.5	17.5
	153	6715	14.5	14.5	17.5
	157	6735	14.5	14.5	17.5
	161	6755	14.5	14.5	17.5
	165	6775	14.5	14.5	17.5
	169	6795	14.5	14.5	17.5
	173	6815	14.5	14.5	17.5
	177	6835	14.5	14.5	17.5
	181	6855	14.5	14.5	17.5
185	6875	14.5	14.5	17.5	

Tune-up Power (2T1S)_LPI					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	1	5955	1.5	1.5	4.5
	5	5975	1.5	1.5	4.5
	9	5995	1.5	1.5	4.5
	13	6015	1.5	1.5	4.5
	17	6035	1.5	1.5	4.5
	21	6055	1.5	1.5	4.5
	25	6075	1.5	1.5	4.5
	29	6095	1.5	1.5	4.5
	33	6115	1.5	1.5	4.5
	37	6135	1.5	1.5	4.5
	41	6155	1.5	1.5	4.5
	45	6175	1.5	1.5	4.5
	49	6195	1.5	1.5	4.5
	53	6215	1.5	1.5	4.5
	57	6235	1.5	1.5	4.5
	61	6255	1.5	1.5	4.5
	65	6275	1.5	1.5	4.5
	69	6295	1.5	1.5	4.5
	73	6315	1.5	1.5	4.5
	77	6335	1.5	1.5	4.5
81	6355	1.5	1.5	4.5	
85	6375	1.5	1.5	4.5	
89	6395	1.5	1.5	4.5	
93	6415	1.5	1.5	4.5	

Tune-up Power (2T1S)_LPI					
UNII-6					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	97	6435	2.0	2.0	5.0
	101	6455	2.0	2.0	5.0
	105	6475	2.0	2.0	5.0
	109	6495	2.0	2.0	5.0
	113	6515	2.0	2.0	5.0

Tune-up Power (2T1S)_LPI					
UNII-7					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	117	6535	1.5	1.5	4.5
	121	6555	1.5	1.5	4.5
	125	6575	1.5	1.5	4.5
	129	6595	1.5	1.5	4.5
	133	6615	1.5	1.5	4.5
	137	6635	1.5	1.5	4.5
	141	6655	1.5	1.5	4.5
	145	6675	1.5	1.5	4.5
	149	6695	1.5	1.5	4.5
	153	6715	1.5	1.5	4.5
	157	6735	1.5	1.5	4.5
	161	6755	1.5	1.5	4.5
	165	6775	1.5	1.5	4.5
	169	6795	1.5	1.5	4.5
	173	6815	1.5	1.5	4.5
	177	6835	1.5	1.5	4.5
181	6855	1.5	1.5	4.5	
185	6875	1.5	1.5	4.5	

Tune-up Power (2T1S)_LPI					
UNII-8					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	189	6895	2.0	2.0	5.0
	193	6915	2.0	2.0	5.0
	197	6935	2.0	2.0	5.0
	201	6955	2.0	2.0	5.0
	205	6975	2.0	2.0	5.0
	209	6995	2.0	2.0	5.0
	213	7015	2.0	2.0	5.0
	217	7035	2.0	2.0	5.0
	221	7055	2.0	2.0	5.0
	225	7075	2.0	2.0	5.0
	229	7095	2.0	2.0	5.0
	233	7115	2.0	2.0	5.0

Tune-up Power (2T2S)					
WLAN 2.4GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.5	15.5	18.5
	13	2472	15.5	15.5	18.5
802.11n HT40	3	2422	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	9	2452	15.5	15.5	18.5
	10	2457	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
802.11ac VHT20	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.5	15.5	18.5
	13	2472	15.5	15.5	18.5
802.11ac VHT40	3	2422	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	9	2452	15.5	15.5	18.5
	10	2457	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
802.11ax HE20	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.5	15.5	18.5
	13	2472	15.5	15.5	18.5
802.11ax HE40	3	2422	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	9	2452	15.5	15.5	18.5
	10	2457	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
802.11be EHT20	1	2412	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5
	12	2467	15.5	15.5	18.5
	13	2472	15.5	15.5	18.5
802.11be EHT40	3	2422	15.5	15.5	18.5
	6	2437	15.5	15.5	18.5
	9	2452	15.5	15.5	18.5
	10	2457	15.5	15.5	18.5
	11	2462	15.5	15.5	18.5

Tune-up Power (2T2S)					
WLAN 5.2GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	36	5180	14.0	14.0	17.0
	40	5200	14.0	14.0	17.0
	44	5220	14.0	14.0	17.0
	48	5240	14.0	14.0	17.0
802.11n HT40	38	5190	14.0	14.0	17.0
	46	5230	14.0	14.0	17.0
802.11ac VHT20	36	5180	14.0	14.0	17.0
	40	5200	14.0	14.0	17.0
	44	5220	14.0	14.0	17.0
	48	5240	14.0	14.0	17.0
802.11ac VHT40	38	5190	14.0	14.0	17.0
	46	5230	14.0	14.0	17.0
802.11ac VHT80	42	5210	14.0	14.0	17.0
802.11ax HE20	36	5180	14.0	14.0	17.0
	40	5200	14.0	14.0	17.0
	44	5220	14.0	14.0	17.0
	48	5240	14.0	14.0	17.0
802.11ax HE40	38	5190	14.0	14.0	17.0
	46	5230	14.0	14.0	17.0
802.11ax HE80	42	5210	14.0	14.0	17.0
802.11be EHT20	36	5180	14.0	14.0	17.0
	40	5200	14.0	14.0	17.0
	44	5220	14.0	14.0	17.0
	48	5240	14.0	14.0	17.0
802.11be EHT40	38	5190	14.0	14.0	17.0
	46	5230	14.0	14.0	17.0
802.11be EHT80	42	5210	14.0	14.0	17.0



Tune-up Power (2T2S)					
WLAN 5.3GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	52	5260	14.0	14.0	17.0
	56	5280	14.0	14.0	17.0
	60	5300	14.0	14.0	17.0
	64	5320	14.0	14.0	17.0
802.11n HT40	54	5270	14.0	14.0	17.0
	62	5310	14.0	14.0	17.0
802.11ac VHT20	52	5260	14.0	14.0	17.0
	56	5280	14.0	14.0	17.0
	60	5300	14.0	14.0	17.0
	64	5320	14.0	14.0	17.0
802.11ac VHT40	54	5270	14.0	14.0	17.0
	62	5310	14.0	14.0	17.0
802.11ac VHT80	58	5290	14.0	14.0	17.0
802.11ac VHT160	50	5250	14.0	14.0	17.0
802.11ax HE20	52	5260	14.0	14.0	17.0
	56	5280	14.0	14.0	17.0
	60	5300	14.0	14.0	17.0
	64	5320	14.0	14.0	17.0
802.11ax HE40	54	5270	14.0	14.0	17.0
	62	5310	14.0	14.0	17.0
802.11ax HE80	58	5290	14.0	14.0	17.0
802.11ax HE160	50	5250	14.0	14.0	17.0
802.11be EHT20	52	5260	14.0	14.0	17.0
	56	5280	14.0	14.0	17.0
	60	5300	14.0	14.0	17.0
	64	5320	14.0	14.0	17.0
802.11be EHT40	54	5270	14.0	14.0	17.0
	62	5310	14.0	14.0	17.0
802.11be EHT80	58	5290	14.0	14.0	17.0
802.11be EHT160	50	5250	14.0	14.0	17.0

Tune-up Power (2T2S)					
WLAN 5.6GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	100	5500	14.0	14.0	17.0
	116	5580	14.0	14.0	17.0
	120	5600	14.0	14.0	17.0
	124	5620	14.0	14.0	17.0
	132	5660	14.0	14.0	17.0
	140	5700	14.0	14.0	17.0
802.11n HT40	144	5720	14.0	14.0	17.0
	102	5510	14.0	14.0	17.0
	110	5550	14.0	14.0	17.0
	118	5590	14.0	14.0	17.0
	126	5630	14.0	14.0	17.0
	134	5670	14.0	14.0	17.0
802.11ac VHT20	142	5710	14.0	14.0	17.0
	100	5500	14.0	14.0	17.0
	116	5580	14.0	14.0	17.0
	120	5600	14.0	14.0	17.0
	124	5620	14.0	14.0	17.0
	132	5660	14.0	14.0	17.0
802.11ac VHT40	140	5700	14.0	14.0	17.0
	144	5720	14.0	14.0	17.0
	102	5510	14.0	14.0	17.0
	110	5550	14.0	14.0	17.0
	118	5590	14.0	14.0	17.0
	126	5630	14.0	14.0	17.0
802.11ac VHT80	134	5670	14.0	14.0	17.0
	142	5710	14.0	14.0	17.0
	106	5530	14.0	14.0	17.0
	122	5610	14.0	14.0	17.0
802.11ac VHT160	138	5690	14.0	14.0	17.0
	114	5570	14.0	14.0	17.0
802.11ax HE20	100	5500	14.0	14.0	17.0
	116	5580	14.0	14.0	17.0
	120	5600	14.0	14.0	17.0
	124	5620	14.0	14.0	17.0
	132	5660	14.0	14.0	17.0
	140	5700	14.0	14.0	17.0
802.11ax HE40	144	5720	14.0	14.0	17.0
	102	5510	14.0	14.0	17.0
	110	5550	14.0	14.0	17.0
	118	5590	14.0	14.0	17.0
	126	5630	14.0	14.0	17.0
	134	5670	14.0	14.0	17.0
802.11ax HE80	142	5710	14.0	14.0	17.0
	106	5530	14.0	14.0	17.0
	122	5610	14.0	14.0	17.0
	138	5690	14.0	14.0	17.0
802.11ax HE160	114	5570	14.0	14.0	17.0
802.11be EHT20	100	5500	14.0	14.0	17.0
	116	5580	14.0	14.0	17.0
	120	5600	14.0	14.0	17.0
	124	5620	14.0	14.0	17.0
	132	5660	14.0	14.0	17.0
	140	5700	14.0	14.0	17.0
802.11be EHT40	144	5720	14.0	14.0	17.0
	102	5510	14.0	14.0	17.0
	110	5550	14.0	14.0	17.0
	118	5590	14.0	14.0	17.0
	126	5630	14.0	14.0	17.0
	134	5670	14.0	14.0	17.0
802.11be EHT80	142	5710	14.0	14.0	17.0
	106	5530	14.0	14.0	17.0
	122	5610	14.0	14.0	17.0
	138	5690	14.0	14.0	17.0
802.11be EHT160	114	5570	14.0	14.0	17.0

Tune-up Power (2T2S)					
WLAN 5.8GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	149	5745	14.0	14.0	17.0
	153	5765	14.0	14.0	17.0
	157	5785	14.0	14.0	17.0
	161	5805	14.0	14.0	17.0
	165	5825	14.0	14.0	17.0
802.11n HT40	151	5755	14.0	14.0	17.0
	159	5795	14.0	14.0	17.0
802.11ac VHT20	149	5745	14.0	14.0	17.0
	153	5765	14.0	14.0	17.0
	157	5785	14.0	14.0	17.0
	161	5805	14.0	14.0	17.0
	165	5825	14.0	14.0	17.0
802.11ac VHT40	151	5755	14.0	14.0	17.0
	159	5795	14.0	14.0	17.0
802.11ac VHT80	155	5775	14.0	14.0	17.0
802.11ax HE20	149	5745	14.0	14.0	17.0
	153	5765	14.0	14.0	17.0
	157	5785	14.0	14.0	17.0
	161	5805	14.0	14.0	17.0
	165	5825	14.0	14.0	17.0
802.11ax HE40	151	5755	14.0	14.0	17.0
	159	5795	14.0	14.0	17.0
802.11ax HE80	155	5775	14.0	14.0	17.0
802.11be EHT20	149	5745	14.0	14.0	17.0
	153	5765	14.0	14.0	17.0
	157	5785	14.0	14.0	17.0
	161	5805	14.0	14.0	17.0
	165	5825	14.0	14.0	17.0
802.11be EHT40	151	5755	14.0	14.0	17.0
	159	5795	14.0	14.0	17.0
802.11be EHT80	155	5775	14.0	14.0	17.0

Tune-up Power (2T2S)					
WLAN 5.9GHz					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11n HT20	169	5845	14.0	14.0	17.0
	173	5865	14.0	14.0	17.0
	177	5885	14.0	14.0	17.0
802.11n HT40	167	5835	14.0	14.0	17.0
	175	5875	14.0	14.0	17.0
802.11ac VHT20	169	5845	14.0	14.0	17.0
	173	5865	14.0	14.0	17.0
	177	5885	14.0	14.0	17.0
802.11ac VHT40	167	5835	14.0	14.0	17.0
	175	5875	14.0	14.0	17.0
802.11ac VHT80	171	5855	14.0	14.0	17.0
802.11ac VHT160	163	5815	14.0	14.0	17.0
802.11ax HE20	169	5845	14.0	14.0	17.0
	173	5865	14.0	14.0	17.0
	177	5885	14.0	14.0	17.0
802.11ax HE40	167	5835	14.0	14.0	17.0
	175	5875	14.0	14.0	17.0
802.11ax HE80	171	5855	14.0	14.0	17.0
802.11ax HE160	163	5815	14.0	14.0	17.0
802.11be EHT20	169	5845	14.0	14.0	17.0
	173	5865	14.0	14.0	17.0
	177	5885	14.0	14.0	17.0
802.11be EHT40	167	5835	14.0	14.0	17.0
	175	5875	14.0	14.0	17.0
802.11be EHT80	171	5855	14.0	14.0	17.0
802.11be EHT160	163	5815	14.0	14.0	17.0

Tune-up Power (2T2S)_SP					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	14.5	14.5	17.5
	5	5975	14.5	14.5	17.5
	9	5995	14.5	14.5	17.5
	13	6015	14.5	14.5	17.5
	17	6035	14.5	14.5	17.5
	21	6055	14.5	14.5	17.5
	25	6075	14.5	14.5	17.5
	29	6095	14.5	14.5	17.5
	33	6115	14.5	14.5	17.5
	37	6135	14.5	14.5	17.5
	41	6155	14.5	14.5	17.5
	45	6175	14.5	14.5	17.5
	49	6195	14.5	14.5	17.5
	53	6215	14.5	14.5	17.5
	57	6235	14.5	14.5	17.5
	61	6255	14.5	14.5	17.5
	65	6275	14.5	14.5	17.5
	69	6295	14.5	14.5	17.5
	73	6315	14.5	14.5	17.5
	77	6335	14.5	14.5	17.5
81	6355	14.5	14.5	17.5	
85	6375	14.5	14.5	17.5	
89	6395	14.5	14.5	17.5	
93	6415	14.5	14.5	17.5	
802.11be EHT20	1	5955	14.5	14.5	17.5
	5	5975	14.5	14.5	17.5
	9	5995	14.5	14.5	17.5
	13	6015	14.5	14.5	17.5
	17	6035	14.5	14.5	17.5
	21	6055	14.5	14.5	17.5
	25	6075	14.5	14.5	17.5
	29	6095	14.5	14.5	17.5
	33	6115	14.5	14.5	17.5
	37	6135	14.5	14.5	17.5
	41	6155	14.5	14.5	17.5
	45	6175	14.5	14.5	17.5
	49	6195	14.5	14.5	17.5
	53	6215	14.5	14.5	17.5
	57	6235	14.5	14.5	17.5
	61	6255	14.5	14.5	17.5
	65	6275	14.5	14.5	17.5
	69	6295	14.5	14.5	17.5
	73	6315	14.5	14.5	17.5
	77	6335	14.5	14.5	17.5
81	6355	14.5	14.5	17.5	
85	6375	14.5	14.5	17.5	
89	6395	14.5	14.5	17.5	
93	6415	14.5	14.5	17.5	

Tune-up Power (2T2S)_SP					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE40	3	5965	14.5	14.5	17.5
	11	6005	14.5	14.5	17.5
	19	6045	14.5	14.5	17.5
	27	6085	14.5	14.5	17.5
	35	6125	14.5	14.5	17.5
	43	6165	14.5	14.5	17.5
	51	6205	14.5	14.5	17.5
	59	6245	14.5	14.5	17.5
	67	6285	14.5	14.5	17.5
	75	6325	14.5	14.5	17.5
	83	6365	14.5	14.5	17.5
802.11ax HE80	91	6405	14.5	14.5	17.5
	7	5985	14.5	14.5	17.5
	23	6065	14.5	14.5	17.5
	39	6145	14.5	14.5	17.5
	55	6225	14.5	14.5	17.5
	71	6305	14.5	14.5	17.5
802.11ax HE160	87	6385	14.5	14.5	17.5
	15	6025	14.5	14.5	17.5
	47	6185	14.5	14.5	17.5
802.11be EHT40	79	6345	14.5	14.5	17.5
	3	5965	14.5	14.5	17.5
	11	6005	14.5	14.5	17.5
	19	6045	14.5	14.5	17.5
	27	6085	14.5	14.5	17.5
	35	6125	14.5	14.5	17.5
	43	6165	14.5	14.5	17.5
	51	6205	14.5	14.5	17.5
	59	6245	14.5	14.5	17.5
	67	6285	14.5	14.5	17.5
	75	6325	14.5	14.5	17.5
802.11be EHT80	83	6365	14.5	14.5	17.5
	91	6405	14.5	14.5	17.5
	7	5985	14.5	14.5	17.5
	23	6065	14.5	14.5	17.5
	39	6145	14.5	14.5	17.5
	55	6225	14.5	14.5	17.5
802.11be EHT160	71	6305	14.5	14.5	17.5
	87	6385	14.5	14.5	17.5
	15	6025	14.5	14.5	17.5
	47	6185	14.5	14.5	17.5
	79	6345	14.5	14.5	17.5

Tune-up Power (2T2S)_SP					
UNII-7					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	14.5	14.5	17.5
	121	6555	14.5	14.5	17.5
	125	6575	14.5	14.5	17.5
	129	6595	14.5	14.5	17.5
	133	6615	14.5	14.5	17.5
	137	6635	14.5	14.5	17.5
	141	6655	14.5	14.5	17.5
	145	6675	14.5	14.5	17.5
	149	6695	14.5	14.5	17.5
	153	6715	14.5	14.5	17.5
	157	6735	14.5	14.5	17.5
	161	6755	14.5	14.5	17.5
	165	6775	14.5	14.5	17.5
	169	6795	14.5	14.5	17.5
	173	6815	14.5	14.5	17.5
802.11ax HE40	177	6835	14.5	14.5	17.5
	181	6855	14.5	14.5	17.5
	185	6875	14.5	14.5	17.5
	123	6565	14.5	14.5	17.5
	131	6605	14.5	14.5	17.5
	139	6645	14.5	14.5	17.5
	147	6685	14.5	14.5	17.5
	155	6725	14.5	14.5	17.5
802.11ax HE80	163	6765	14.5	14.5	17.5
	171	6805	14.5	14.5	17.5
	179	6845	14.5	14.5	17.5
	187	6885	14.5	14.5	17.5
802.11ax HE160	135	6625	14.5	14.5	17.5
	151	6705	14.5	14.5	17.5
802.11be EHT20	167	6785	14.5	14.5	17.5
	183	6865	14.5	14.5	17.5
	143	6665	14.5	14.5	17.5
	175	6825	14.5	14.5	17.5
	117	6535	14.5	14.5	17.5
	121	6555	14.5	14.5	17.5
	125	6575	14.5	14.5	17.5
	129	6595	14.5	14.5	17.5
	133	6615	14.5	14.5	17.5
	137	6635	14.5	14.5	17.5
	141	6655	14.5	14.5	17.5
	145	6675	14.5	14.5	17.5
	149	6695	14.5	14.5	17.5
	153	6715	14.5	14.5	17.5
	157	6735	14.5	14.5	17.5
	802.11be EHT40	161	6755	14.5	14.5
165		6775	14.5	14.5	17.5
169		6795	14.5	14.5	17.5
173		6815	14.5	14.5	17.5
177		6835	14.5	14.5	17.5
181		6855	14.5	14.5	17.5
185		6875	14.5	14.5	17.5
123		6565	14.5	14.5	17.5
802.11be EHT80	131	6605	14.5	14.5	17.5
	139	6645	14.5	14.5	17.5
	147	6685	14.5	14.5	17.5
	155	6725	14.5	14.5	17.5
	163	6765	14.5	14.5	17.5
	171	6805	14.5	14.5	17.5
	179	6845	14.5	14.5	17.5
802.11be EHT160	187	6885	14.5	14.5	17.5
	135	6625	14.5	14.5	17.5
	151	6705	14.5	14.5	17.5
	167	6785	14.5	14.5	17.5
	183	6865	14.5	14.5	17.5
	143	6665	14.5	14.5	17.5
	175	6825	14.5	14.5	17.5

Tune-up Power (2T2S)_LPI					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	4.5	4.5	7.5
	5	5975	4.5	4.5	7.5
	9	5995	4.5	4.5	7.5
	13	6015	4.5	4.5	7.5
	17	6035	4.5	4.5	7.5
	21	6055	4.5	4.5	7.5
	25	6075	4.5	4.5	7.5
	29	6095	4.5	4.5	7.5
	33	6115	4.5	4.5	7.5
	37	6135	4.5	4.5	7.5
	41	6155	4.5	4.5	7.5
	45	6175	4.5	4.5	7.5
	49	6195	4.5	4.5	7.5
	53	6215	4.5	4.5	7.5
	57	6235	4.5	4.5	7.5
	61	6255	4.5	4.5	7.5
	65	6275	4.5	4.5	7.5
	69	6295	4.5	4.5	7.5
	73	6315	4.5	4.5	7.5
	77	6335	4.5	4.5	7.5
81	6355	4.5	4.5	7.5	
85	6375	4.5	4.5	7.5	
89	6395	4.5	4.5	7.5	
93	6415	4.5	4.5	7.5	
802.11be EHT20	1	5955	4.5	4.5	7.5
	5	5975	4.5	4.5	7.5
	9	5995	4.5	4.5	7.5
	13	6015	4.5	4.5	7.5
	17	6035	4.5	4.5	7.5
	21	6055	4.5	4.5	7.5
	25	6075	4.5	4.5	7.5
	29	6095	4.5	4.5	7.5
	33	6115	4.5	4.5	7.5
	37	6135	4.5	4.5	7.5
	41	6155	4.5	4.5	7.5
	45	6175	4.5	4.5	7.5
	49	6195	4.5	4.5	7.5
	53	6215	4.5	4.5	7.5
	57	6235	4.5	4.5	7.5
	61	6255	4.5	4.5	7.5
	65	6275	4.5	4.5	7.5
	69	6295	4.5	4.5	7.5
	73	6315	4.5	4.5	7.5
	77	6335	4.5	4.5	7.5
81	6355	4.5	4.5	7.5	
85	6375	4.5	4.5	7.5	
89	6395	4.5	4.5	7.5	
93	6415	4.5	4.5	7.5	



Tune-up Power (2T2S)_LPI					
UNII-5					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE40	3	5965	7.5	7.5	10.5
	11	6005	7.5	7.5	10.5
	19	6045	7.5	7.5	10.5
	27	6085	7.5	7.5	10.5
	35	6125	7.5	7.5	10.5
	43	6165	7.5	7.5	10.5
	51	6205	7.5	7.5	10.5
	59	6245	7.5	7.5	10.5
	67	6285	7.5	7.5	10.5
	75	6325	7.5	7.5	10.5
802.11ax HE80	83	6365	7.5	7.5	10.5
	91	6405	7.5	7.5	10.5
	7	5985	10.5	10.5	13.5
	23	6065	10.5	10.5	13.5
	39	6145	10.5	10.5	13.5
	55	6225	10.5	10.5	13.5
802.11ax HE160	71	6305	10.5	10.5	13.5
	87	6385	10.5	10.5	13.5
	15	6025	13.0	13.0	16.0
802.11ax HE160	47	6185	13.0	13.0	16.0
	79	6345	13.0	13.0	16.0
	3	5965	7.5	7.5	10.5
802.11be EHT40	11	6005	7.5	7.5	10.5
	19	6045	7.5	7.5	10.5
	27	6085	7.5	7.5	10.5
	35	6125	7.5	7.5	10.5
	43	6165	7.5	7.5	10.5
	51	6205	7.5	7.5	10.5
	59	6245	7.5	7.5	10.5
	67	6285	7.5	7.5	10.5
	75	6325	7.5	7.5	10.5
	83	6365	7.5	7.5	10.5
802.11be EHT80	91	6405	7.5	7.5	10.5
	7	5985	10.5	10.5	13.5
	23	6065	10.5	10.5	13.5
	39	6145	10.5	10.5	13.5
	55	6225	10.5	10.5	13.5
	71	6305	10.5	10.5	13.5
802.11be EHT160	87	6385	10.5	10.5	13.5
	15	6025	13.0	13.0	16.0
	47	6185	13.0	13.0	16.0
802.11be EHT160	79	6345	13.0	13.0	16.0

Tune-up Power (2T2S)_LPI					
UNII-6					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	4.5	4.5	7.5
	101	6455	4.5	4.5	7.5
	105	6475	4.5	4.5	7.5
	109	6495	4.5	4.5	7.5
	113	6515	4.5	4.5	7.5
802.11ax HE40	99	6445	7.5	7.5	10.5
	107	6485	7.5	7.5	10.5
	115	6525	7.5	7.5	10.5
802.11ax HE80	103	6465	10.5	10.5	13.5
	119	6545	10.5	10.5	13.5
802.11ax HE160	111	6505	13.0	13.0	16.0
802.11be EHT20	97	6435	4.5	4.5	7.5
	101	6455	4.5	4.5	7.5
	105	6475	4.5	4.5	7.5
	109	6495	4.5	4.5	7.5
	113	6515	4.5	4.5	7.5
802.11be EHT40	99	6445	7.5	7.5	10.5
	107	6485	7.5	7.5	10.5
	115	6525	7.5	7.5	10.5
802.11be EHT80	103	6465	10.5	10.5	13.5
	119	6545	10.5	10.5	13.5
802.11be EHT160	111	6505	13.0	13.0	16.0

Tune-up Power (2T2S)_LPI					
UNII-7					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	4.5	4.5	7.5
	121	6555	4.5	4.5	7.5
	125	6575	4.5	4.5	7.5
	129	6595	4.5	4.5	7.5
	133	6615	4.5	4.5	7.5
	137	6635	4.5	4.5	7.5
	141	6655	4.5	4.5	7.5
	145	6675	4.5	4.5	7.5
	149	6695	4.5	4.5	7.5
	153	6715	4.5	4.5	7.5
	157	6735	4.5	4.5	7.5
	161	6755	4.5	4.5	7.5
	165	6775	4.5	4.5	7.5
	169	6795	4.5	4.5	7.5
	173	6815	4.5	4.5	7.5
177	6835	4.5	4.5	7.5	
181	6855	4.5	4.5	7.5	
185	6875	4.5	4.5	7.5	
802.11ax HE40	123	6565	7.5	7.5	10.5
	131	6605	7.5	7.5	10.5
	139	6645	7.5	7.5	10.5
	147	6685	7.5	7.5	10.5
	155	6725	7.5	7.5	10.5
	163	6765	7.5	7.5	10.5
	171	6805	7.5	7.5	10.5
	179	6845	7.5	7.5	10.5
187	6885	7.5	7.5	10.5	
802.11ax HE80	135	6625	10.5	10.5	13.5
	151	6705	10.5	10.5	13.5
	167	6785	10.5	10.5	13.5
802.11ax HE160	183	6865	10.5	10.5	13.5
	143	6665	13.0	13.0	16.0
802.11be EHT20	175	6825	13.0	13.0	16.0
	117	6535	4.5	4.5	7.5
	121	6555	4.5	4.5	7.5
	125	6575	4.5	4.5	7.5
	129	6595	4.5	4.5	7.5
	133	6615	4.5	4.5	7.5
	137	6635	4.5	4.5	7.5
	141	6655	4.5	4.5	7.5
	145	6675	4.5	4.5	7.5
	149	6695	4.5	4.5	7.5
	153	6715	4.5	4.5	7.5
	157	6735	4.5	4.5	7.5
	161	6755	4.5	4.5	7.5
	165	6775	4.5	4.5	7.5
	169	6795	4.5	4.5	7.5
173	6815	4.5	4.5	7.5	
177	6835	4.5	4.5	7.5	
181	6855	4.5	4.5	7.5	
185	6875	4.5	4.5	7.5	
802.11be EHT40	123	6565	7.5	7.5	10.5
	131	6605	7.5	7.5	10.5
	139	6645	7.5	7.5	10.5
	147	6685	7.5	7.5	10.5
	155	6725	7.5	7.5	10.5
	163	6765	7.5	7.5	10.5
	171	6805	7.5	7.5	10.5
	179	6845	7.5	7.5	10.5
187	6885	7.5	7.5	10.5	
802.11be EHT80	135	6625	10.5	10.5	13.5
	151	6705	10.5	10.5	13.5
	167	6785	10.5	10.5	13.5
802.11be EHT160	183	6865	10.5	10.5	13.5
	143	6665	13.0	13.0	16.0
802.11be EHT160	175	6825	13.0	13.0	16.0

Tune-up Power (2T2S)_LPI					
UNII-8					
Mode	Channel	Frequency	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	4.5	4.5	7.5
	193	6915	4.5	4.5	7.5
	197	6935	4.5	4.5	7.5
	201	6955	4.5	4.5	7.5
	205	6975	4.5	4.5	7.5
	209	6995	4.5	4.5	7.5
	213	7015	4.5	4.5	7.5
	217	7035	4.5	4.5	7.5
	221	7055	4.5	4.5	7.5
	225	7075	4.5	4.5	7.5
	229	7095	4.5	4.5	7.5
802.11ax HE40	233	7115	4.5	4.5	7.5
	195	6925	7.5	7.5	10.5
	203	6965	7.5	7.5	10.5
	211	7005	7.5	7.5	10.5
	219	7045	7.5	7.5	10.5
802.11ax HE80	227	7085	7.5	7.5	10.5
	199	6945	10.5	10.5	13.5
802.11ax HE160	215	7025	10.5	10.5	13.5
802.11ax HE160	207	6985	13.0	13.0	16.0
802.11be EHT20	189	6895	4.5	4.5	7.5
	193	6915	4.5	4.5	7.5
	197	6935	4.5	4.5	7.5
	201	6955	4.5	4.5	7.5
	205	6975	4.5	4.5	7.5
	209	6995	4.5	4.5	7.5
	213	7015	4.5	4.5	7.5
	217	7035	4.5	4.5	7.5
	221	7055	4.5	4.5	7.5
	225	7075	4.5	4.5	7.5
	229	7095	4.5	4.5	7.5
802.11be EHT40	233	7115	4.5	4.5	7.5
	195	6925	7.5	7.5	10.5
	203	6965	7.5	7.5	10.5
	211	7005	7.5	7.5	10.5
	219	7045	7.5	7.5	10.5
802.11be EHT80	227	7085	7.5	7.5	10.5
	199	6945	10.5	10.5	13.5
802.11be EHT160	215	7025	10.5	10.5	13.5
802.11be EHT160	207	6985	13.0	13.0	16.0

## Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

Conducted Power (1T1S)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.47
	6	2437	15.49
	11	2462	15.43
	12	2467	15.44
	13	2472	15.45
802.11g	1	2412	15.34
	6	2437	15.4
	11	2462	15.3
	12	2467	15.31
	13	2472	15.37
802.11n HT20	1	2412	15.37
	6	2437	15.38
	11	2462	15.32
	12	2467	15.38
	13	2472	15.35
802.11n HT40	3	2422	15.32
	6	2437	15.39
	9	2452	15.4
	10	2457	15.39
	11	2462	15.34
802.11ac VHT20	1	2412	15.37
	6	2437	15.35
	11	2462	15.4
	12	2467	15.32
	13	2472	15.36
802.11ac VHT40	3	2422	15.31
	6	2437	15.31
	9	2452	15.31
	10	2457	15.36
	11	2462	15.39
802.11ax HE20	1	2412	15.34
	6	2437	15.37
	11	2462	15.31
	12	2467	15.34
	13	2472	15.33
802.11ax HE40	3	2422	15.3
	6	2437	15.33
	9	2452	15.31
	10	2457	15.33
	11	2462	15.31
802.11be EHT20	1	2412	15.39
	6	2437	15.39
	11	2462	15.34
	12	2467	15.36
	13	2472	15.33
802.11be EHT40	3	2422	15.31
	6	2437	15.31
	9	2452	15.36
	10	2457	15.37
	11	2462	15.3

Conducted Power (1T1S)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	15.43
	6	2437	15.48
	11	2462	15.45
	12	2467	15.41
	13	2472	15.39
802.11g	1	2412	15.39
	6	2437	15.36
	11	2462	15.38
	12	2467	15.34
	13	2472	15.32
802.11n HT20	1	2412	15.39
	6	2437	15.35
	11	2462	15.31
	12	2467	15.34
	13	2472	15.31
802.11n HT40	3	2422	15.31
	6	2437	15.32
	9	2452	15.35
	10	2457	15.39
	11	2462	15.35
802.11ac VHT20	1	2412	15.33
	6	2437	15.38
	11	2462	15.31
	12	2467	15.34
	13	2472	15.33
802.11ac VHT40	3	2422	15.31
	6	2437	15.39
	9	2452	15.34
	10	2457	15.32
	11	2462	15.38
802.11ax HE20	1	2412	15.4
	6	2437	15.34
	11	2462	15.37
	12	2467	15.32
	13	2472	15.39
802.11ax HE40	3	2422	15.39
	6	2437	15.31
	9	2452	15.34
	10	2457	15.31
	11	2462	15.35
802.11be EHT20	1	2412	15.38
	6	2437	15.33
	11	2462	15.38
	12	2467	15.34
	13	2472	15.38
802.11be EHT40	3	2422	15.36
	6	2437	15.4
	9	2452	15.33
	10	2457	15.37
	11	2462	15.39



Conducted Power (1T1S)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	12.47
	39	2441	12.49
	78	2480	12.66
LE	0	2402	12.43
	19	2440	12.41
	39	2480	12.65



Conducted Power (1T1S)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	13.88
	40	5200	13.83
	44	5220	13.9
	48	5240	13.82
802.11n HT20	36	5180	13.86
	40	5200	13.88
	44	5220	13.82
	48	5240	13.84
802.11n HT40	38	5190	13.88
	46	5230	13.8
802.11ac VHT20	36	5180	13.84
	40	5200	13.88
	44	5220	13.89
	48	5240	13.8
802.11ac VHT40	38	5190	13.88
	46	5230	13.86
802.11ac VHT80	42	5210	13.82
802.11ax HE20	36	5180	13.8
	40	5200	13.82
	44	5220	13.89
	48	5240	13.89
802.11ax HE40	38	5190	13.83
	46	5230	13.83
802.11ax HE80	42	5210	13.89
802.11be EHT20	36	5180	13.81
	40	5200	13.9
	44	5220	13.82
	48	5240	13.9
802.11be EHT40	38	5190	13.89
	46	5230	13.84
802.11be EHT80	42	5210	13.9

Conducted Power (1T1S)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	13.87
	40	5200	13.85
	44	5220	13.83
	48	5240	13.84
802.11n HT20	36	5180	13.86
	40	5200	13.84
	44	5220	13.9
	48	5240	13.84
802.11n HT40	38	5190	13.81
	46	5230	13.83
802.11ac VHT20	36	5180	13.88
	40	5200	13.8
	44	5220	13.86
802.11ac VHT40	48	5240	13.81
	38	5190	13.87
	46	5230	13.83
802.11ac VHT80	42	5210	13.83
802.11ax HE20	36	5180	13.87
	40	5200	13.87
	44	5220	13.86
	48	5240	13.87
802.11ax HE40	38	5190	13.84
	46	5230	13.84
802.11ax HE80	42	5210	13.87
802.11be EHT20	36	5180	13.85
	40	5200	13.89
	44	5220	13.86
	48	5240	13.85
802.11be EHT40	38	5190	13.87
	46	5230	13.85
802.11be EHT80	42	5210	13.83

Conducted Power (1T1S)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	13.83
	56	5280	13.81
	60	5300	13.86
	64	5320	13.81
802.11n HT20	52	5260	13.89
	56	5280	13.84
	60	5300	13.89
	64	5320	13.84
802.11n HT40	54	5270	13.79
	62	5310	13.87
802.11ac VHT20	52	5260	13.83
	56	5280	13.89
	60	5300	13.82
	64	5320	13.86
802.11ac VHT40	54	5270	13.83
	62	5310	13.87
802.11ac VHT80	58	5290	13.88
802.11ac VHT160	50	5250	13.91
802.11ax HE20	52	5260	13.85
	56	5280	13.85
	60	5300	13.81
	64	5320	13.86
802.11ax HE40	54	5270	13.83
	62	5310	13.89
802.11ax HE80	58	5290	13.89
802.11ax HE160	50	5250	13.86
802.11be EHT20	52	5260	13.83
	56	5280	13.87
	60	5300	13.82
	64	5320	13.84
802.11be EHT40	54	5270	13.88
	62	5310	13.83
802.11be EHT80	58	5290	13.83
802.11be EHT160	50	5250	13.89

Conducted Power (1T1S)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	13.86
	56	5280	13.88
	60	5300	13.85
	64	5320	13.81
802.11n HT20	52	5260	13.81
	56	5280	13.87
	60	5300	13.83
	64	5320	13.83
802.11n HT40	54	5270	13.81
	62	5310	13.82
802.11ac VHT20	52	5260	13.84
	56	5280	13.82
	60	5300	13.85
	64	5320	13.88
802.11ac VHT40	54	5270	13.85
	62	5310	13.81
802.11ac VHT80	58	5290	13.83
802.11ac VHT160	50	5250	13.89
802.11ax HE20	52	5260	13.83
	56	5280	13.84
	60	5300	13.86
	64	5320	13.83
802.11ax HE40	54	5270	13.88
	62	5310	13.83
802.11ax HE80	58	5290	13.84
802.11ax HE160	50	5250	13.81
802.11be EHT20	52	5260	13.83
	56	5280	13.87
	60	5300	13.86
	64	5320	13.82
802.11be EHT40	54	5270	13.83
	62	5310	13.82
802.11be EHT80	58	5290	13.88
802.11be EHT160	50	5250	13.85

Conducted Power (1T1S)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	13.88
	116	5580	13.85
	120	5600	13.88
	124	5620	13.85
	132	5660	13.84
	140	5700	13.87
	144	5720	13.89
802.11n HT20	100	5500	13.88
	116	5580	13.89
	120	5600	13.82
	124	5620	13.86
	132	5660	13.89
	140	5700	13.86
	144	5720	13.84
802.11n HT40	102	5510	13.84
	110	5550	13.89
	118	5590	13.81
	126	5630	13.89
	134	5670	13.84
	142	5710	13.83
802.11ac VHT20	100	5500	13.82
	116	5580	13.84
	120	5600	13.87
	124	5620	13.86
	132	5660	13.86
	140	5700	13.87
	144	5720	13.81
802.11ac VHT40	102	5510	13.81
	110	5550	13.86
	118	5590	13.85
	126	5630	13.81
	134	5670	13.84
	142	5710	13.81
802.11ac VHT80	106	5530	13.96
	122	5610	13.91
	138	5690	13.92
802.11ac VHT160	114	5570	13.94
802.11ax HE20	100	5500	13.82
	116	5580	13.78
	120	5600	13.85
	124	5620	13.78
	132	5660	13.79
	140	5700	13.83
	144	5720	13.82
802.11ax HE40	102	5510	13.83
	110	5550	13.77
	118	5590	13.81
	126	5630	13.81
	134	5670	13.81
	142	5710	13.81
802.11ax HE80	106	5530	13.74
	122	5610	13.81
	138	5690	13.78
802.11ax HE160	114	5570	13.81
802.11be EHT20	100	5500	13.84
	116	5580	13.79
	120	5600	13.82
	124	5620	13.75
	132	5660	13.83
	140	5700	13.77
	144	5720	13.81
802.11be EHT40	102	5510	13.77
	110	5550	13.84
	118	5590	13.74
	126	5630	13.82
	134	5670	13.76
	142	5710	13.82
802.11be EHT80	106	5530	13.83
	122	5610	13.75
	138	5690	13.84
802.11be EHT160	114	5570	13.81

Conducted Power (1T1S)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	13.79
	116	5580	13.85
	120	5600	13.81
	124	5620	13.79
	132	5660	13.77
	140	5700	13.74
	144	5720	13.78
802.11n HT20	100	5500	13.84
	116	5580	13.75
	120	5600	13.78
	124	5620	13.82
	132	5660	13.86
	140	5700	13.78
	144	5720	13.77
802.11n HT40	102	5510	13.74
	110	5550	13.75
	118	5590	13.81
	126	5630	13.74
	134	5670	13.76
	142	5710	13.81
	100	5500	13.85
802.11ac VHT20	116	5580	13.83
	120	5600	13.86
	124	5620	13.79
	132	5660	13.78
	140	5700	13.78
	144	5720	13.77
	102	5510	13.81
802.11ac VHT40	110	5550	13.81
	118	5590	13.74
	126	5630	13.78
	134	5670	13.74
	142	5710	13.76
	106	5530	13.98
	802.11ac VHT80	122	5610
138		5690	13.95
114		5570	13.91
802.11ac VHT160	114	5570	13.91
802.11ax HE20	100	5500	13.79
	116	5580	13.82
	120	5600	13.77
	124	5620	13.75
	132	5660	13.77
	140	5700	13.83
	144	5720	13.77
802.11ax HE40	102	5510	13.81
	110	5550	13.84
	118	5590	13.81
	126	5630	13.82
	134	5670	13.76
	142	5710	13.75
	106	5530	13.75
802.11ax HE80	122	5610	13.79
	138	5690	13.83
	114	5570	13.82
802.11ax HE160	114	5570	13.82
802.11be EHT20	100	5500	13.79
	116	5580	13.78
	120	5600	13.76
	124	5620	13.81
	132	5660	13.79
	140	5700	13.83
	144	5720	13.81
802.11be EHT40	102	5510	13.83
	110	5550	13.82
	118	5590	13.84
	126	5630	13.76
	134	5670	13.78
	142	5710	13.81
	106	5530	13.78
802.11be EHT80	122	5610	13.83
	138	5690	13.82
	114	5570	13.79
802.11be EHT160	114	5570	13.79

Conducted Power (1T1S)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	13.78
	153	5765	13.81
	157	5785	13.84
	161	5805	13.88
	165	5825	13.83
802.11n HT20	149	5745	13.83
	153	5765	13.78
	157	5785	13.79
	161	5805	13.82
	165	5825	13.78
802.11n HT40	151	5755	13.77
	159	5795	13.78
802.11ac VHT20	149	5745	13.79
	153	5765	13.82
	157	5785	13.78
	161	5805	13.84
	165	5825	13.76
802.11ac VHT40	151	5755	13.77
	159	5795	13.74
802.11ac VHT80	155	5775	13.97
802.11ax HE20	149	5745	13.79
	153	5765	13.85
	157	5785	13.84
	161	5805	13.84
	165	5825	13.78
802.11ax HE40	151	5755	13.78
	159	5795	13.77
802.11ax HE80	155	5775	13.82
802.11be EHT20	149	5745	13.81
	153	5765	13.78
	157	5785	13.74
	161	5805	13.81
	165	5825	13.83
802.11be EHT40	151	5755	13.76
	159	5795	13.74
802.11be EHT80	155	5775	13.78

Conducted Power (1T1S)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	13.77
	153	5765	13.78
	157	5785	13.84
	161	5805	13.89
	165	5825	13.82
802.11n HT20	149	5745	13.79
	153	5765	13.76
	157	5785	13.83
	161	5805	13.78
	165	5825	13.78
802.11n HT40	151	5755	13.79
	159	5795	13.74
802.11ac VHT20	149	5745	13.84
	153	5765	13.83
	157	5785	13.75
	161	5805	13.83
	165	5825	13.74
802.11ac VHT40	151	5755	13.83
	159	5795	13.74
802.11ac VHT80	155	5775	13.95
802.11ax HE20	149	5745	13.74
	153	5765	13.79
	157	5785	13.82
	161	5805	13.78
	165	5825	13.77
802.11ax HE40	151	5755	13.78
	159	5795	13.79
802.11ax HE80	155	5775	13.82
802.11be EHT20	149	5745	13.78
	153	5765	13.84
	157	5785	13.76
	161	5805	13.77
	165	5825	13.74
802.11be EHT40	151	5755	13.76
	159	5795	13.83
802.11be EHT80	155	5775	13.74



Conducted Power (1T1S)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	13.76
	173	5865	13.79
	177	5885	13.82
802.11n HT20	169	5845	13.81
	173	5865	13.82
	177	5885	13.84
802.11n HT40	167	5835	13.84
	175	5875	13.82
802.11ac VHT20	169	5845	13.81
	173	5865	13.82
	177	5885	13.74
802.11ac VHT40	167	5835	13.82
	175	5875	13.81
802.11ac VHT80	171	5855	13.77
802.11ac VHT160	163	5815	13.95
802.11ax HE20	169	5845	13.76
	173	5865	13.74
	177	5885	13.76
802.11ax HE40	167	5835	13.79
	175	5875	13.81
802.11ax HE80	171	5855	13.84
802.11ax HE160	163	5815	13.75
802.11be EHT20	169	5845	13.78
	173	5865	13.79
	177	5885	13.83
802.11be EHT40	167	5835	13.74
	175	5875	13.78
802.11be EHT80	171	5855	13.83
802.11be EHT160	163	5815	13.83

Conducted Power (1T1S)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	13.78
	173	5865	13.74
	177	5885	13.82
802.11n HT20	169	5845	13.76
	173	5865	13.82
	177	5885	13.75
802.11n HT40	167	5835	13.75
	175	5875	13.76
802.11ac VHT20	169	5845	13.84
	173	5865	13.78
	177	5885	13.74
802.11ac VHT40	167	5835	13.82
	175	5875	13.82
802.11ac VHT80	171	5855	13.77
802.11ac VHT160	163	5815	13.96
802.11ax HE20	169	5845	13.83
	173	5865	13.89
	177	5885	13.79
802.11ax HE40	167	5835	13.84
	175	5875	13.78
802.11ax HE80	171	5855	13.74
802.11ax HE160	163	5815	13.78
802.11be EHT20	169	5845	13.77
	173	5865	13.79
	177	5885	13.82
802.11be EHT40	167	5835	13.84
	175	5875	13.78
802.11be EHT80	171	5855	13.76
802.11be EHT160	163	5815	13.85

Conducted Power (1T1S)_SP			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	14.37
	5	5975	14.38
	9	5995	14.32
	13	6015	14.37
	17	6035	14.31
	21	6055	14.34
	25	6075	14.39
	29	6095	14.35
	33	6115	14.32
	37	6135	14.36
	41	6155	14.34
	45	6175	14.36
	49	6195	14.29
	53	6215	14.34
	57	6235	14.38
	61	6255	14.33
	65	6275	14.38
	69	6295	14.29
	73	6315	14.31
	77	6335	14.37
81	6355	14.38	
85	6375	14.33	
89	6395	14.31	
93	6415	14.36	
802.11ax HE20	1	5955	14.31
	5	5975	14.33
	9	5995	14.32
	13	6015	14.38
	17	6035	14.32
	21	6055	14.37
	25	6075	14.31
	29	6095	14.38
	33	6115	14.29
	37	6135	14.34
	41	6155	14.38
	45	6175	14.28
	49	6195	14.36
	53	6215	14.37
	57	6235	14.37
	61	6255	14.34
	65	6275	14.31
	69	6295	14.32
	73	6315	14.34
	77	6335	14.31
81	6355	14.34	
85	6375	14.28	
89	6395	14.32	
93	6415	14.36	
802.11be EHT20	1	5955	14.37
	5	5975	14.29
	9	5995	14.29
	13	6015	14.33
	17	6035	14.31
	21	6055	14.33
	25	6075	14.34
	29	6095	14.35
	33	6115	14.29
	37	6135	14.29
	41	6155	14.34
	45	6175	14.36
	49	6195	14.35
	53	6215	14.31
	57	6235	14.28
	61	6255	14.31
	65	6275	14.29
	69	6295	14.32
	73	6315	14.35
	77	6335	14.36
81	6355	14.36	
85	6375	14.37	
89	6395	14.29	
93	6415	14.36	

Conducted Power (1T1S)_SP			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	14.31
	11	6005	14.38
	19	6045	14.36
	27	6085	14.33
	35	6125	14.36
	43	6165	14.38
	51	6205	14.36
	59	6245	14.35
	67	6285	14.29
	75	6325	14.32
	83	6365	14.31
802.11ax HE80	91	6405	14.36
	7	5985	14.35
	23	6065	14.33
	39	6145	14.37
	55	6225	14.38
802.11ax HE160	71	6305	14.33
	87	6385	14.29
	15	6025	14.49
802.11be EHT40	47	6185	14.45
	79	6345	14.41
	3	5965	14.36
	11	6005	14.29
	19	6045	14.38
	27	6085	14.33
	35	6125	14.31
	43	6165	14.37
	51	6205	14.35
	59	6245	14.33
	67	6285	14.34
802.11be EHT80	75	6325	14.33
	83	6365	14.31
	91	6405	14.32
	7	5985	14.29
	23	6065	14.35
802.11be EHT160	39	6145	14.31
	55	6225	14.32
	71	6305	14.37
	87	6385	14.32
	15	6025	14.45
	47	6185	14.38
	79	6345	14.41



Conducted Power (1T1S)_SP			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	14.35
	5	5975	14.33
	9	5995	14.36
	13	6015	14.29
	17	6035	14.32
	21	6055	14.34
	25	6075	14.34
	29	6095	14.31
	33	6115	14.29
	37	6135	14.34
	41	6155	14.28
	45	6175	14.35
	49	6195	14.37
	53	6215	14.35
	57	6235	14.38
	61	6255	14.29
	65	6275	14.34
	69	6295	14.38
	73	6315	14.28
	77	6335	14.37
802.11ax HE20	81	6355	14.33
	85	6375	14.34
	89	6395	14.34
	93	6415	14.28
	1	5955	14.34
	5	5975	14.32
	9	5995	14.35
	13	6015	14.31
	17	6035	14.28
	21	6055	14.36
	25	6075	14.29
	29	6095	14.31
	33	6115	14.29
	37	6135	14.34
	41	6155	14.36
	45	6175	14.39
	49	6195	14.33
	53	6215	14.38
	57	6235	14.28
	61	6255	14.29
65	6275	14.29	
69	6295	14.37	
73	6315	14.31	
77	6335	14.35	
81	6355	14.33	
85	6375	14.36	
89	6395	14.36	
93	6415	14.28	
802.11be EHT20	1	5955	14.32
	5	5975	14.38
	9	5995	14.32
	13	6015	14.32
	17	6035	14.29
	21	6055	14.36
	25	6075	14.36
	29	6095	14.36
	33	6115	14.37
	37	6135	14.37
	41	6155	14.33
	45	6175	14.33
	49	6195	14.29
	53	6215	14.38
	57	6235	14.29
	61	6255	14.37
	65	6275	14.34
	69	6295	14.32
	73	6315	14.35
	77	6335	14.32
81	6355	14.33	
85	6375	14.31	
89	6395	14.31	
93	6415	14.32	

Conducted Power (1T1S)_SP			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	14.32
	11	6005	14.34
	19	6045	14.38
	27	6085	14.34
	35	6125	14.37
	43	6165	14.34
	51	6205	14.28
	59	6245	14.37
	67	6285	14.37
	75	6325	14.36
	83	6365	14.29
802.11ax HE80	91	6405	14.36
	7	5985	14.34
	23	6065	14.35
	39	6145	14.34
	55	6225	14.29
	71	6305	14.36
802.11ax HE160	87	6385	14.37
	15	6025	14.48
	47	6185	14.43
802.11be EHT40	79	6345	14.46
	3	5965	14.38
	11	6005	14.33
	19	6045	14.37
	27	6085	14.32
	35	6125	14.32
	43	6165	14.29
	51	6205	14.37
	59	6245	14.33
	67	6285	14.37
	75	6325	14.37
802.11be EHT80	83	6365	14.34
	91	6405	14.33
	7	5985	14.31
	23	6065	14.33
	39	6145	14.32
	55	6225	14.34
802.11be EHT160	71	6305	14.37
	87	6385	14.28
	15	6025	14.43
	47	6185	14.37
	79	6345	14.42



Conducted Power (1T1S) SP			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	14.33
	121	6555	14.32
	125	6575	14.32
	129	6595	14.29
	133	6615	14.32
	137	6635	14.33
	141	6655	14.31
	145	6675	14.36
	149	6695	14.34
	153	6715	14.34
	157	6735	14.31
	161	6755	14.34
	165	6775	14.31
	169	6795	14.37
	173	6815	14.34
	177	6835	14.38
181	6855	14.38	
185	6875	14.32	
802.11ax HE20	117	6535	14.31
	121	6555	14.37
	125	6575	14.32
	129	6595	14.36
	133	6615	14.37
	137	6635	14.35
	141	6655	14.31
	145	6675	14.38
	149	6695	14.28
	153	6715	14.31
	157	6735	14.36
	161	6755	14.29
	165	6775	14.35
	169	6795	14.35
	173	6815	14.32
	177	6835	14.31
181	6855	14.36	
185	6875	14.32	
802.11ax HE40	123	6565	14.28
	131	6605	14.33
	139	6645	14.28
	147	6685	14.33
	155	6725	14.36
	163	6765	14.29
	171	6805	14.33
	179	6845	14.32
187	6885	14.33	
802.11ax HE80	135	6625	14.35
	151	6705	14.34
	167	6785	14.32
802.11ax HE160	183	6865	14.34
	143	6665	14.43
802.11be EHT20	175	6825	14.41
	117	6535	14.38
	121	6555	14.31
	125	6575	14.35
	129	6595	14.34
	133	6615	14.29
	137	6635	14.32
	141	6655	14.34
	145	6675	14.31
	149	6695	14.38
	153	6715	14.28
	157	6735	14.32
	161	6755	14.33
	165	6775	14.29
	169	6795	14.33
	173	6815	14.32
177	6835	14.31	
181	6855	14.34	
185	6875	14.31	
802.11be EHT40	123	6565	14.37
	131	6605	14.36
	139	6645	14.29
	147	6685	14.37
	155	6725	14.35
	163	6765	14.32
	171	6805	14.29
	179	6845	14.35
187	6885	14.35	
802.11be EHT80	135	6625	14.35
	151	6705	14.28
	167	6785	14.31
802.11be EHT160	183	6865	14.33
	143	6665	14.33
	175	6825	14.37



Conducted Power (1T1S) SP			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	14.31
	121	6555	14.36
	125	6575	14.33
	129	6595	14.29
	133	6615	14.36
	137	6635	14.34
	141	6655	14.28
	145	6675	14.36
	149	6695	14.33
	153	6715	14.35
	157	6735	14.28
	161	6755	14.33
	165	6775	14.36
	169	6795	14.28
	173	6815	14.28
177	6835	14.37	
181	6855	14.31	
185	6875	14.37	
802.11ax HE20	117	6535	14.38
	121	6555	14.38
	125	6575	14.38
	129	6595	14.36
	133	6615	14.35
	137	6635	14.32
	141	6655	14.33
	145	6675	14.32
	149	6695	14.35
	153	6715	14.31
	157	6735	14.32
	161	6755	14.29
	165	6775	14.33
	169	6795	14.37
	173	6815	14.38
177	6835	14.28	
181	6855	14.33	
185	6875	14.34	
802.11ax HE40	123	6565	14.38
	131	6605	14.28
	139	6645	14.36
	147	6685	14.34
	155	6725	14.35
	163	6765	14.36
	171	6805	14.37
	179	6845	14.36
	187	6885	14.35
802.11ax HE80	135	6625	14.35
	151	6705	14.32
	167	6785	14.27
802.11ax HE160	183	6865	14.38
	143	6665	14.45
802.11be EHT20	175	6825	14.39
	117	6535	14.34
	121	6555	14.35
	125	6575	14.36
	129	6595	14.36
	133	6615	14.39
	137	6635	14.38
	141	6655	14.37
	145	6675	14.29
	149	6695	14.29
	153	6715	14.36
	157	6735	14.36
	161	6755	14.36
	165	6775	14.37
	169	6795	14.28
173	6815	14.38	
177	6835	14.31	
181	6855	14.28	
185	6875	14.28	
802.11be EHT40	123	6565	14.28
	131	6605	14.38
	139	6645	14.35
	147	6685	14.37
	155	6725	14.31
	163	6765	14.33
	171	6805	14.37
	179	6845	14.32
	187	6885	14.38
802.11be EHT80	135	6625	14.29
	151	6705	14.32
	167	6785	14.31
802.11be EHT160	183	6865	14.28
	143	6665	14.33
	175	6825	14.39





Conducted Power (1T1S) LPI			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	1	5955	7.1
	5	5975	6.97
	9	5995	7.02
	13	6015	6.93
	17	6035	6.90
	21	6055	7.05
	25	6075	6.99
	29	6095	6.95
	33	6115	6.94
	37	6135	6.98
	41	6155	6.99
	45	6175	7.08
	49	6195	6.92
	53	6215	7.02
	57	6235	7
	61	6255	6.98
	65	6275	6.95
	69	6295	7.07
	73	6315	6.93
	77	6335	7.02
81	6355	6.95	
85	6375	7.09	
89	6395	7.1	
93	6415	6.98	
802.11ax HE20	1	5955	7.05
	5	5975	6.93
	9	5995	7.09
	13	6015	7.09
	17	6035	6.82
	21	6055	7.02
	25	6075	6.87
	29	6095	6.88
	33	6115	6.99
	37	6135	6.9
	41	6155	6.92
	45	6175	6.88
	49	6195	6.92
	53	6215	7.07
	57	6235	6.96
	61	6255	6.89
	65	6275	6.82
	69	6295	7.1
	73	6315	6.94
	77	6335	7.08
81	6355	7.09	
85	6375	6.95	
89	6395	6.87	
93	6415	6.86	
802.11be EHT20	1	5955	7.18
	5	5975	6.85
	9	5995	6.98
	13	6015	6.92
	17	6035	6.99
	21	6055	6.93
	25	6075	6.93
	29	6095	6.98
	33	6115	6.82
	37	6135	7.1
	41	6155	6.82
	45	6175	6.92
	49	6195	6.9
	53	6215	6.83
	57	6235	6.85
	61	6255	6.82
	65	6275	6.81
	69	6295	6.91
	73	6315	7.03
	77	6335	6.90
81	6355	6.81	
85	6375	6.87	
89	6395	6.81	
93	6415	6.90	

Conducted Power (1T1S) LPI			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	9.7
	11	6005	9.61
	19	6045	9.58
	27	6085	9.6
	35	6125	9.54
	43	6165	9.76
	51	6205	9.54
	59	6245	9.6
	67	6285	9.54
	75	6325	9.62
	83	6365	9.54
802.11ax HE80	91	6405	9.61
	7	5985	12.48
	23	6065	12.63
	39	6145	12.7
	55	6225	12.61
	71	6305	12.46
802.11ax HE160	87	6385	12.39
	15	6025	14.45
	47	6185	14.44
802.11be EHT40	79	6345	14.37
	3	5965	9.81
	11	6005	9.51
	19	6045	9.69
	27	6085	9.61
	35	6125	9.46
	43	6165	9.88
	51	6205	9.54
	59	6245	9.66
	67	6285	9.45
	75	6325	9.65
802.11be EHT80	83	6365	9.6
	91	6405	9.72
	7	5985	12.56
	23	6065	12.47
	39	6145	12.88
	55	6225	12.41
802.11be EHT160	71	6305	12.57
	87	6385	12.51
	15	6025	14.41
	47	6185	14.33
	79	6345	14.32

Conducted Power (1T1S) LPI			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	1	5955	6.92
	5	5975	7.08
	9	5995	7.05
	13	6015	7.07
	17	6035	6.9
	21	6055	6.98
	25	6075	6.99
	29	6095	6.9
	33	6115	7.06
	37	6135	6.97
	41	6155	7
	45	6175	6.95
	49	6195	7.1
	53	6215	7.03
	57	6235	6.93
	61	6255	7.03
	65	6275	6.94
	69	6295	7.06
	73	6315	6.94
	77	6335	6.95
81	6355	7.05	
85	6375	7.03	
89	6395	6.97	
93	6415	6.94	
802.11ax HE20	1	5955	6.89
	5	5975	6.95
	9	5995	7.1
	13	6015	6.99
	17	6035	6.84
	21	6055	7.05
	25	6075	6.89
	29	6095	6.89
	33	6115	6.89
	37	6135	7.03
	41	6155	6.85
	45	6175	7.08
	49	6195	7
	53	6215	7.03
	57	6235	6.83
	61	6255	7.06
	65	6275	6.81
	69	6295	6.93
	73	6315	6.89
	77	6335	6.92
81	6355	7.02	
85	6375	7.05	
89	6395	6.87	
93	6415	7.01	
802.11be EHT20	1	5955	6.93
	5	5975	7.04
	9	5995	6.9
	13	6015	6.84
	17	6035	6.99
	21	6055	6.87
	25	6075	7.05
	29	6095	6.8
	33	6115	6.88
	37	6135	6.83
	41	6155	7.03
	45	6175	6.98
	49	6195	6.86
	53	6215	6.93
	57	6235	7.01
	61	6255	7.05
	65	6275	6.95
	69	6295	7.01
	73	6315	6.89
	77	6335	7.02
81	6355	6.9	
85	6375	7.04	
89	6395	6.97	
93	6415	6.82	

Conducted Power (1T1S) LPI			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	9.42
	11	6005	9.56
	19	6045	9.64
	27	6085	9.58
	35	6125	9.47
	43	6165	9.57
	51	6205	9.66
	59	6245	9.49
	67	6285	9.44
	75	6325	9.66
	83	6365	9.45
802.11ax HE80	91	6405	9.54
	7	5985	12.51
	23	6065	12.56
	39	6145	12.42
	55	6225	12.6
	71	6305	12.46
802.11ax HE160	87	6385	12.62
	15	6025	14.47
	47	6185	14.43
802.11be EHT40	79	6345	14.41
	3	5965	9.7
	11	6005	9.4
	19	6045	9.62
	27	6085	9.46
	35	6125	9.47
	43	6165	9.43
	51	6205	9.57
	59	6245	9.5
	67	6285	9.52
	75	6325	9.62
802.11be EHT80	83	6365	9.61
	91	6405	9.46
	7	5985	12.43
	23	6065	12.45
	39	6145	12.56
	55	6225	12.41
802.11be EHT160	71	6305	12.65
	87	6385	12.41
	15	6025	14.35
	47	6185	14.41
	79	6345	14.39



Conducted Power (1T1S)_LPI			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	97	6435	7.26
	101	6455	7.11
	105	6475	7.21
	109	6495	7.19
	113	6515	7.07
802.11ax HE20	97	6435	7.51
	101	6455	7.38
	105	6475	7.5
	109	6495	7.48
	113	6515	7.54
802.11ax HE40	99	6445	9.93
	107	6485	9.71
	115	6525	9.86
802.11ax HE80	103	6465	12.59
	119	6545	12.51
802.11ax HE160	111	6505	14.47
802.11be EHT20	97	6435	7.35
	101	6455	7.33
	105	6475	7.49
	109	6495	7.27
	113	6515	7.34
802.11be EHT40	99	6445	9.87
	107	6485	9.76
	115	6525	9.81
802.11be EHT80	103	6465	12.57
	119	6545	12.61
802.11be EHT160	111	6505	14.43

Conducted Power (1T1S)_LPI			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	97	6435	7.2
	101	6455	7.12
	105	6475	7.06
	109	6495	7.05
	113	6515	7.16
802.11ax HE20	97	6435	7.43
	101	6455	7.28
	105	6475	7.4
	109	6495	7.34
	113	6515	7.26
802.11ax HE40	99	6445	9.81
	107	6485	9.72
	115	6525	9.79
802.11ax HE80	103	6465	12.87
	119	6545	12.88
802.11ax HE160	111	6505	14.45
802.11be EHT20	97	6435	7.42
	101	6455	7.47
	105	6475	7.24
	109	6495	7.47
	113	6515	7.33
802.11be EHT40	99	6445	9.78
	107	6485	9.79
	115	6525	9.99
802.11be EHT80	103	6465	12.76
	119	6545	12.63
802.11be EHT160	111	6505	14.41



Conducted Power (1T1S)_LPI			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	117	6535	6.84
	121	6555	6.97
	125	6575	6.98
	129	6595	7.09
	133	6615	7.01
	137	6635	6.91
	141	6655	6.83
	145	6675	7.09
	149	6695	7.12
	153	6715	6.8
	157	6735	6.87
	161	6755	6.82
	165	6775	6.8
	169	6795	6.85
	173	6815	7.08
177	6835	6.92	
181	6855	7.05	
185	6875	7.08	
802.11ax HE20	117	6535	7.25
	121	6555	7.04
	125	6575	6.99
	129	6595	7.07
	133	6615	6.9
	137	6635	6.97
	141	6655	7.14
	145	6675	6.97
	149	6695	6.96
	153	6715	7.1
	157	6735	7.12
	161	6755	6.93
	165	6775	7.13
	169	6795	6.93
	173	6815	7.05
177	6835	7.18	
181	6855	6.99	
185	6875	6.94	
802.11ax HE40	123	6565	9.51
	131	6605	9.44
	139	6645	9.59
	147	6685	9.52
	155	6725	9.59
	163	6765	9.54
	171	6805	9.42
	179	6845	9.62
	187	6885	9.98
802.11ax HE80	135	6625	12.57
	151	6705	12.62
	167	6785	12.37
802.11ax HE160	183	6865	12.38
	143	6665	14.48
802.11be EHT20	175	6825	14.43
	117	6535	7.29
	121	6555	7.15
	125	6575	7.07
	129	6595	7.04
	133	6615	7.16
	137	6635	7.18
	141	6655	6.97
	145	6675	7.18
	149	6695	6.9
	153	6715	7.05
	157	6735	6.99
	161	6755	7.05
	165	6775	7.09
	169	6795	7.09
173	6815	6.94	
177	6835	7.07	
181	6855	7.02	
185	6875	7.06	
802.11be EHT40	123	6565	9.61
	131	6605	9.54
	139	6645	9.49
	147	6685	9.45
	155	6725	9.7
	163	6765	9.53
	171	6805	9.59
	179	6845	9.66
	187	6885	9.43
802.11be EHT80	135	6625	12.41
	151	6705	12.76
	167	6785	12.59
802.11be EHT160	183	6865	12.4
	143	6665	14.46
	175	6825	14.43



Conducted Power (1T1S)_LPI			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	117	6535	7
	121	6555	7.03
	125	6575	7.09
	129	6595	6.82
	133	6615	6.84
	137	6635	6.81
	141	6655	6.93
	145	6675	6.96
	149	6695	6.88
	153	6715	6.97
	157	6735	6.84
	161	6755	7.01
	165	6775	6.9
	169	6795	6.82
	173	6815	6.9
	177	6835	7.03
181	6855	7.08	
185	6875	6.94	
802.11ax HE20	117	6535	7.48
	121	6555	7.02
	125	6575	7.03
	129	6595	7.17
	133	6615	6.96
	137	6635	6.96
	141	6655	7.07
	145	6675	7.2
	149	6695	6.94
	153	6715	7.04
	157	6735	7.06
	161	6755	7.17
	165	6775	7.05
	169	6795	7.1
	173	6815	7.09
	177	6835	7.03
181	6855	6.95	
185	6875	7.1	
802.11ax HE40	123	6565	9.59
	131	6605	9.55
	139	6645	9.45
	147	6685	9.6
	155	6725	9.59
	163	6765	9.58
	171	6805	9.46
	179	6845	9.48
187	6885	9.57	
802.11ax HE80	135	6625	12.57
	151	6705	12.41
	167	6785	12.44
802.11ax HE160	183	6865	12.47
	143	6665	14.44
802.11be EHT20	175	6825	14.39
	117	6535	7.32
	121	6555	7.04
	125	6575	7.2
	129	6595	7.04
	133	6615	7.03
	137	6635	6.91
	141	6655	7.14
	145	6675	7.12
	149	6695	7.02
	153	6715	7.07
	157	6735	7.04
	161	6755	7.18
	165	6775	6.93
	169	6795	6.94
	173	6815	7.06
177	6835	7.07	
181	6855	7.02	
185	6875	7.05	
802.11be EHT40	123	6565	9.45
	131	6605	9.45
	139	6645	9.58
	147	6685	9.45
	155	6725	9.41
	163	6765	9.51
	171	6805	9.46
	179	6845	9.47
187	6885	9.55	
802.11be EHT80	135	6625	12.55
	151	6705	12.5
	167	6785	12.44
802.11be EHT160	183	6865	12.45
	143	6665	14.42
	175	6825	14.38



Conducted Power (1T1S) LPI			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	189	6895	7.42
	193	6915	7.47
	197	6935	7.36
	201	6955	7.2
	205	6975	7.37
	209	6995	7.33
	213	7015	7.47
	217	7035	7.39
	221	7055	7.27
	225	7075	7.4
	229	7095	7.41
802.11ax HE20	233	7115	7.31
	189	6895	7.26
	193	6915	7.36
	197	6935	7.28
	201	6955	7.21
	205	6975	7.26
	209	6995	7.25
	213	7015	7.4
	217	7035	7.24
	221	7055	7.3
	225	7075	7.4
802.11ax HE40	229	7095	7.22
	233	7115	7.32
	195	6925	10.28
	203	6965	10.14
	211	7005	10.25
802.11ax HE80	219	7045	10.14
	227	7085	10.22
802.11ax HE160	199	6945	12.78
	215	7025	12.82
802.11be EHT20	207	6985	14.49
	189	6895	7.49
	193	6915	7.34
	197	6935	7.44
	201	6955	7.29
	205	6975	7.47
	209	6995	7.26
	213	7015	7.5
	217	7035	7.47
	221	7055	7.24
	225	7075	7.27
802.11be EHT40	229	7095	7.23
	233	7115	7.4
	195	6925	10.15
	203	6965	10.16
	211	7005	10.23
802.11be EHT80	219	7045	10.27
	227	7085	10.38
	199	6945	12.74
802.11be EHT160	215	7025	12.99
	207	6985	14.44

Conducted Power (1T1S) LPI			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	189	6895	7.35
	193	6915	7.33
	197	6935	7.3
	201	6955	7.32
	205	6975	7.21
	209	6995	7.23
	213	7015	7.21
	217	7035	7.37
	221	7055	7.21
	225	7075	7.46
	229	7095	7.22
802.11ax HE20	233	7115	7.39
	189	6895	7.39
	193	6915	7.49
	197	6935	7.26
	201	6955	7.32
	205	6975	7.37
	209	6995	7.5
	213	7015	7.36
	217	7035	7.32
	221	7055	7.42
	225	7075	7.3
802.11ax HE40	229	7095	7.42
	233	7115	7.29
	195	6925	10.13
	203	6965	10.36
	211	7005	10.11
802.11ax HE80	219	7045	10.3
	227	7085	10.18
802.11ax HE160	199	6945	12.43
	215	7025	12.41
802.11be EHT20	207	6985	14.45
	189	6895	7.48
	193	6915	7.34
	197	6935	7.35
	201	6955	7.25
	205	6975	7.38
	209	6995	7.22
	213	7015	7.36
	217	7035	7.38
	221	7055	7.48
	225	7075	7.23
802.11be EHT40	229	7095	7.35
	233	7115	7.36
	195	6925	10.17
	203	6965	10.21
	211	7005	10.11
802.11be EHT80	219	7045	10.39
	227	7085	10.37
802.11be EHT160	199	6945	12.7
	215	7025	12.78
	207	6985	14.37

Conducted Power (2T1S)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	15.41	15.46	18.45
	6	2437	15.49	15.48	18.50
	11	2462	15.38	15.45	18.43
	12	2467	14.81	14.79	17.81
	13	2472	10.25	10.72	13.50
802.11g	1	2412	15.36	15.41	18.40
	6	2437	15.38	15.35	18.38
	11	2462	15.42	15.42	18.43
	12	2467	15.43	15.37	18.41
	13	2472	13.35	13.4	16.39

Conducted Power (2T1S)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	13.85	13.81	16.84
	40	5200	13.89	13.85	16.88
	44	5220	13.9	13.92	16.92
	48	5240	13.88	13.9	16.9

Conducted Power (2T1S)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	13.91	13.93	16.93
	56	5280	13.85	13.91	16.89
	60	5300	13.96	13.94	16.96
	64	5320	13.89	13.88	16.9

Conducted Power (2T1S)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	13.93	13.89	16.92
	116	5580	13.97	13.96	16.98
	120	5600	13.91	13.91	16.92
	124	5620	13.85	13.89	16.88
	132	5660	13.88	13.93	16.92
	140	5700	13.89	13.85	16.88
	144	5720	13.92	13.89	16.92

Conducted Power (2T1S)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	13.95	13.92	16.95
	153	5765	13.91	13.89	16.91
	157	5785	13.98	13.97	16.99
	161	5805	13.89	13.95	16.93
	165	5825	13.93	13.91	16.93

Conducted Power (2T1S)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	13.93	13.91	16.93
	173	5865	13.97	13.95	16.97
	177	5885	13.92	13.89	16.92



Conducted Power (2T1S)_SP					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	14.39	14.37	17.39
	5	5975	14.35	14.33	17.35
	9	5995	14.37	14.34	17.37
	13	6015	14.43	14.37	17.41
	17	6035	14.46	14.35	17.42
	21	6055	14.41	14.31	17.37
	25	6075	14.38	14.31	17.36
	29	6095	14.42	14.31	17.38
	33	6115	14.34	14.32	17.34
	37	6135	14.43	14.31	17.38
	41	6155	14.45	14.39	17.43
	45	6175	14.47	14.45	17.47
	49	6195	14.41	14.35	17.39
	53	6215	14.33	14.37	17.36
	57	6235	14.43	14.39	17.42
	61	6255	14.34	14.39	17.38
	65	6275	14.33	14.33	17.34
	69	6295	14.39	14.38	17.4
	73	6315	14.42	14.35	17.4
	77	6335	14.33	14.32	17.34
81	6355	14.37	14.38	17.39	
85	6375	14.41	14.41	17.42	
89	6395	14.38	14.43	17.42	
93	6415	14.42	14.39	17.42	

**Conducted Power (2T1S)\_SP**

**UNII-7 Ant 0+1**

Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	14.43	14.38	17.42
	121	6555	14.38	14.37	17.39
	125	6575	14.44	14.33	17.4
	129	6595	14.41	14.35	17.39
	133	6615	14.34	14.35	17.36
	137	6635	14.4	14.33	17.38
	141	6655	14.38	14.31	17.36
	145	6675	14.32	14.38	17.36
	149	6695	14.46	14.41	17.45
	153	6715	14.39	14.32	17.37
	157	6735	14.33	14.37	17.36
	161	6755	14.31	14.31	17.32
	165	6775	14.36	14.37	17.38
	169	6795	14.44	14.32	17.39
	173	6815	14.42	14.39	17.42
	177	6835	14.35	14.34	17.36
	181	6855	14.38	14.33	17.37
185	6875	14.39	14.29	17.35	

Conducted Power (2T1S)_LPI					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	1	5955	1.05	0.99	4.03
	5	5975	1	0.95	3.99
	9	5995	1.03	0.91	3.98
	13	6015	1.04	0.94	4
	17	6035	1.06	0.91	4
	21	6055	1.09	0.9	4.01
	25	6075	1.03	0.92	3.99
	29	6095	1.1	0.93	4.03
	33	6115	1.05	0.93	4
	37	6135	1.07	0.91	4
	41	6155	1.05	0.93	4
	45	6175	1.11	0.96	4.05
	49	6195	1.07	0.93	4.01
	53	6215	1.02	0.94	3.99
	57	6235	1.07	0.9	4
	61	6255	1.09	0.95	4.03
	65	6275	1.01	0.93	3.98
	69	6295	1.04	0.93	4
	73	6315	1.08	0.91	4.01
	77	6335	1.01	0.94	3.99
81	6355	1.06	0.9	3.99	
85	6375	1.08	0.94	4.02	
89	6395	1.02	0.9	3.97	
93	6415	1.06	0.96	4.02	

Conducted Power (2T1S)_LPI					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	97	6435	1.58	1.48	4.54
	101	6455	1.56	1.47	4.53
	105	6475	1.6	1.46	4.54
	109	6495	1.54	1.48	4.52
	113	6515	1.66	1.56	4.62

Conducted Power (2T1S)_LPI					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	117	6535	0.94	0.83	3.9
	121	6555	1.19	0.94	4.08
	125	6575	1.07	1.03	4.06
	129	6595	1.03	0.95	4
	133	6615	1.08	1.03	4.07
	137	6635	1.01	0.94	3.99
	141	6655	1.19	1.01	4.11
	145	6675	1.16	0.96	4.07
	149	6695	1.29	0.9	4.11
	153	6715	1.04	0.92	3.99
	157	6735	1.12	0.94	4.04
	161	6755	1.05	1.01	4.04
	165	6775	1	1.04	4.03
	169	6795	1.11	1.04	4.09
	173	6815	1.19	0.93	4.07
	177	6835	1.15	0.97	4.07
	181	6855	0.93	1.09	4.02
	185	6875	1.23	1.07	4.16

Conducted Power (2T1S)_LPI					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	189	6895	1.51	1.45	4.49
	193	6915	1.56	1.5	4.54
	197	6935	1.51	1.45	4.49
	201	6955	1.57	1.53	4.56
	205	6975	1.53	1.5	4.53
	209	6995	1.65	1.49	4.58
	213	7015	1.57	1.55	4.57
	217	7035	1.59	1.41	4.51
	221	7055	1.55	1.5	4.54
	225	7075	1.54	1.44	4.5
	229	7095	1.55	1.49	4.53
	233	7115	1.53	1.55	4.55

Conducted Power (2T2S)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	1	2412	15.26	15.33	18.31
	6	2437	15.24	15.38	18.32
	11	2462	15.27	15.25	18.27
	12	2467	15.32	15.25	18.30
	13	2472	15.29	15.27	18.29
802.11n HT40	3	2422	15.41	15.43	18.43
	6	2437	15.48	15.49	18.50
	9	2452	15.45	15.38	18.43
	10	2457	15.38	15.37	18.39
	11	2462	15.36	15.35	18.37
802.11ac VHT20	1	2412	15.26	15.25	18.27
	6	2437	15.29	15.23	18.27
	11	2462	15.32	15.3	18.32
	12	2467	15.27	15.32	18.31
	13	2472	15.27	15.29	18.29
802.11ac VHT40	3	2422	15.31	15.31	18.32
	6	2437	15.28	15.26	18.28
	9	2452	15.23	15.31	18.28
	10	2457	15.32	15.3	18.32
	11	2462	15.29	15.23	18.27
802.11ax HE20	1	2412	15.31	15.27	18.30
	6	2437	15.25	15.29	18.28
	11	2462	15.24	15.27	18.27
	12	2467	15.32	15.26	18.30
	13	2472	15.27	15.33	18.31
802.11ax HE40	3	2422	15.28	15.23	18.27
	6	2437	15.27	15.32	18.31
	9	2452	15.33	15.26	18.31
	10	2457	15.24	15.28	18.27
	11	2462	15.25	15.25	18.26
802.11be EHT20	1	2412	15.23	15.29	18.27
	6	2437	15.31	15.33	18.33
	11	2462	15.27	15.25	18.27
	12	2467	15.31	15.27	18.30
	13	2472	15.32	15.24	18.29
802.11be EHT40	3	2422	15.33	15.24	18.30
	6	2437	15.27	15.23	18.26
	9	2452	15.28	15.29	18.30
	10	2457	15.36	15.23	18.31
	11	2462	15.37	15.25	18.32

Conducted Power (2T2S)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	36	5180	13.82	13.78	16.81
	40	5200	13.83	13.75	16.8
	44	5220	13.86	13.83	16.86
	48	5240	13.87	13.85	16.87
802.11n HT40	38	5190	13.85	13.77	16.82
	46	5230	13.85	13.82	16.85
802.11ac VHT20	36	5180	13.84	13.84	16.85
	40	5200	13.89	13.84	16.88
	44	5220	13.85	13.85	16.86
	48	5240	13.86	13.83	16.86
802.11ac VHT40	38	5190	13.77	13.85	16.82
	46	5230	13.79	13.82	16.82
802.11ac VHT80	42	5210	13.89	13.76	16.84
802.11ax HE20	36	5180	13.86	13.82	16.85
	40	5200	13.83	13.84	16.85
	44	5220	13.86	13.82	16.85
	48	5240	13.84	13.76	16.81
802.11ax HE40	38	5190	13.81	13.86	16.85
	46	5230	13.86	13.77	16.83
802.11ax HE80	42	5210	13.82	13.81	16.83
802.11be EHT20	36	5180	13.82	13.79	16.82
	40	5200	13.86	13.76	16.82
	44	5220	13.88	13.85	16.88
	48	5240	13.83	13.76	16.81
802.11be EHT40	38	5190	13.86	13.79	16.84
	46	5230	13.87	13.84	16.87
802.11be EHT80	42	5210	13.89	13.78	16.85



Conducted Power (2T2S)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	52	5260	13.86	13.77	16.83
	56	5280	13.87	13.82	16.86
	60	5300	13.82	13.84	16.84
	64	5320	13.82	13.75	16.8
802.11n HT40	54	5270	13.81	13.85	16.84
	62	5310	13.84	13.79	16.83
802.11ac VHT20	52	5260	13.83	13.78	16.82
	56	5280	13.77	13.81	16.8
	60	5300	13.88	13.81	16.86
	64	5320	13.89	13.79	16.85
802.11ac VHT40	54	5270	13.88	13.82	16.86
	62	5310	13.82	13.85	16.85
802.11ac VHT80	58	5290	13.85	13.88	16.88
802.11ac VHT160	50	5250	13.89	13.93	16.92
802.11ax HE20	52	5260	13.87	13.84	16.87
	56	5280	13.85	13.85	16.86
	60	5300	13.87	13.85	16.87
	64	5320	13.81	13.77	16.8
802.11ax HE40	54	5270	13.84	13.81	16.84
	62	5310	13.82	13.8	16.82
802.11ax HE80	58	5290	13.81	13.81	16.82
802.11ax HE160	50	5250	13.83	13.82	16.84
802.11be EHT20	52	5260	13.83	13.77	16.81
	56	5280	13.84	13.85	16.86
	60	5300	13.85	13.77	16.82
	64	5320	13.85	13.85	16.86
802.11be EHT40	54	5270	13.79	13.77	16.79
	62	5310	13.81	13.79	16.81
802.11be EHT80	58	5290	13.85	13.86	16.87
802.11be EHT160	50	5250	13.82	13.89	16.87

Conducted Power (2T2S)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	100	5500	13.82	13.76	16.8
	116	5580	13.89	13.79	16.85
	120	5600	13.83	13.76	16.81
	124	5620	13.81	13.78	16.81
	132	5660	13.83	13.76	16.81
	140	5700	13.85	13.85	16.86
	144	5720	13.88	13.84	16.87
802.11n HT40	102	5510	13.84	13.84	16.85
	110	5550	13.91	13.83	16.88
	118	5590	13.87	13.84	16.87
	126	5630	13.89	13.81	16.86
	134	5670	13.88	13.85	16.88
	142	5710	13.81	13.82	16.83
802.11ac VHT20	100	5500	13.84	13.81	16.84
	116	5580	13.89	13.77	16.84
	120	5600	13.86	13.77	16.83
	124	5620	13.86	13.79	16.84
	132	5660	13.82	13.85	16.85
	140	5700	13.81	13.77	16.8
	144	5720	13.81	13.81	16.82
802.11ac VHT40	102	5510	13.88	13.79	16.85
	110	5550	13.81	13.81	16.82
	118	5590	13.89	13.79	16.85
	126	5630	13.81	13.79	16.81
	134	5670	13.86	13.76	16.82
	142	5710	13.84	13.92	16.89
802.11ac VHT80	106	5530	13.93	13.94	16.95
	122	5610	13.86	13.84	16.86
	138	5690	13.91	13.87	16.9
802.11ac VHT160	114	5570	13.92	13.92	16.93
802.11ax HE20	100	5500	13.82	13.82	16.83
	116	5580	13.88	13.81	16.86
	120	5600	13.88	13.79	16.85
	124	5620	13.89	13.84	16.88
	132	5660	13.88	13.81	16.86
	140	5700	13.85	13.79	16.83
	144	5720	13.87	13.79	16.84
802.11ax HE40	102	5510	13.84	13.85	16.86
	110	5550	13.87	13.82	16.86
	118	5590	13.84	13.83	16.85
	126	5630	13.91	13.84	16.89
	134	5670	13.83	13.85	16.85
	142	5710	13.86	13.85	16.87
802.11ax HE80	106	5530	13.88	13.84	16.87
	122	5610	13.89	13.82	16.87
	138	5690	13.81	13.76	16.8
802.11ax HE160	114	5570	13.85	13.75	16.81
802.11be EHT20	100	5500	13.84	13.84	16.85
	116	5580	13.77	13.82	16.81
	120	5600	13.89	13.75	16.83
	124	5620	13.88	13.76	16.83
	132	5660	13.83	13.84	16.85
	140	5700	13.85	13.78	16.83
	144	5720	13.89	13.85	16.88
802.11be EHT40	102	5510	13.83	13.85	16.85
	110	5550	13.85	13.78	16.83
	118	5590	13.81	13.83	16.83
	126	5630	13.86	13.81	16.85
	134	5670	13.83	13.75	16.8
	142	5710	13.9	13.75	16.84
802.11be EHT80	106	5530	13.85	13.85	16.86
	122	5610	13.91	13.83	16.88
	138	5690	13.82	13.76	16.8
802.11be EHT160	114	5570	13.83	13.82	16.84

Conducted Power (2T2S)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	149	5745	13.88	13.75	16.83
	153	5765	13.85	13.75	16.81
	157	5785	13.82	13.82	16.83
	161	5805	13.89	13.82	16.87
	165	5825	13.88	13.85	16.88
802.11n HT40	151	5755	13.88	13.75	16.83
	159	5795	13.81	13.81	16.82
802.11ac VHT20	149	5745	13.85	13.82	16.85
	153	5765	13.81	13.85	16.84
	157	5785	13.86	13.84	16.86
	161	5805	13.85	13.78	16.83
	165	5825	13.85	13.81	16.84
802.11ac VHT40	151	5755	13.88	13.76	16.83
	159	5795	13.87	13.92	16.91
802.11ac VHT80	155	5775	13.93	13.98	16.97
802.11ax HE20	149	5745	13.85	13.82	16.85
	153	5765	13.86	13.79	16.84
	157	5785	13.81	13.81	16.82
	161	5805	13.84	13.79	16.83
	165	5825	13.81	13.85	16.84
802.11ax HE40	151	5755	13.84	13.82	16.84
	159	5795	13.89	13.78	16.85
802.11ax HE80	155	5775	13.79	13.75	16.78
802.11be EHT20	149	5745	13.82	13.81	16.83
	153	5765	13.82	13.81	16.83
	157	5785	13.82	13.83	16.84
	161	5805	13.88	13.75	16.83
	165	5825	13.85	13.79	16.83
802.11be EHT40	151	5755	13.88	13.75	16.83
	159	5795	13.85	13.76	16.82
802.11be EHT80	155	5775	13.87	13.77	16.83

Conducted Power (2T2S)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	169	5845	13.87	13.89	16.89
	173	5865	13.81	13.81	16.82
	177	5885	13.89	13.83	16.87
802.11n HT40	167	5835	13.82	13.83	16.84
	175	5875	13.88	13.84	16.87
802.11ac VHT20	169	5845	13.83	13.89	16.87
	173	5865	13.82	13.86	16.85
	177	5885	13.83	13.82	16.84
802.11ac VHT40	167	5835	13.88	13.89	16.9
	175	5875	13.85	13.85	16.86
802.11ac VHT80	171	5855	13.88	13.85	16.88
802.11ac VHT160	163	5815	13.91	13.96	16.95
802.11ax HE20	169	5845	13.84	13.89	16.88
	173	5865	13.89	13.83	16.87
	177	5885	13.87	13.89	16.89
802.11ax HE40	167	5835	13.81	13.82	16.83
	175	5875	13.84	13.85	16.86
802.11ax HE80	171	5855	13.84	13.85	16.86
802.11ax HE160	163	5815	13.84	13.8	16.83
802.11be EHT20	169	5845	13.82	13.85	16.85
	173	5865	13.82	13.89	16.87
	177	5885	13.88	13.85	16.88
802.11be EHT40	167	5835	13.85	13.85	16.86
	175	5875	13.89	13.85	16.88
802.11be EHT80	171	5855	13.86	13.81	16.85
802.11be EHT160	163	5815	13.81	13.87	16.85

Conducted Power (2T2S)_SP					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	14.33	14.34	17.35
	5	5975	14.27	14.31	17.3
	9	5995	14.32	14.25	17.3
	13	6015	14.25	14.25	17.26
	17	6035	14.31	14.27	17.3
	21	6055	14.31	14.31	17.32
	25	6075	14.29	14.33	17.32
	29	6095	14.31	14.23	17.28
	33	6115	14.25	14.27	17.27
	37	6135	14.27	14.25	17.27
	41	6155	14.28	14.33	17.32
	45	6175	14.31	14.32	17.33
	49	6195	14.3	14.36	17.34
	53	6215	14.25	14.28	17.28
	57	6235	14.34	14.35	17.36
	61	6255	14.34	14.37	17.37
	65	6275	14.28	14.33	17.32
	69	6295	14.34	14.29	17.33
	73	6315	14.34	14.28	17.32
	77	6335	14.27	14.34	17.32
81	6355	14.29	14.35	17.33	
85	6375	14.34	14.33	17.35	
89	6395	14.26	14.28	17.28	
93	6415	14.29	14.31	17.31	
802.11be EHT20	1	5955	14.25	14.34	17.31
	5	5975	14.25	14.26	17.27
	9	5995	14.31	14.25	17.29
	13	6015	14.32	14.31	17.33
	17	6035	14.28	14.29	17.3
	21	6055	14.26	14.25	17.27
	25	6075	14.31	14.29	17.31
	29	6095	14.32	14.34	17.34
	33	6115	14.25	14.29	17.28
	37	6135	14.33	14.31	17.33
	41	6155	14.34	14.26	17.31
	45	6175	14.34	14.26	17.31
	49	6195	14.35	14.26	17.32
	53	6215	14.33	14.27	17.31
	57	6235	14.28	14.26	17.28
	61	6255	14.35	14.31	17.34
	65	6275	14.33	14.28	17.32
	69	6295	14.35	14.27	17.32
	73	6315	14.35	14.28	17.33
	77	6335	14.25	14.26	17.27
81	6355	14.32	14.35	17.35	
85	6375	14.3	14.27	17.3	
89	6395	14.29	14.33	17.32	
93	6415	14.31	14.35	17.34	

Conducted Power (2T2S)_SP					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	14.26	14.31	17.3
	11	6005	14.33	14.34	17.35
	19	6045	14.34	14.25	17.31
	27	6085	14.35	14.31	17.34
	35	6125	14.27	14.33	17.31
	43	6165	14.35	14.35	17.36
	51	6205	14.35	14.32	17.35
	59	6245	14.32	14.34	17.34
	67	6285	14.25	14.31	17.29
	75	6325	14.26	14.32	17.3
	83	6365	14.3	14.35	17.34
802.11ax HE80	91	6405	14.27	14.25	17.27
	7	5985	14.28	14.27	17.29
	23	6065	14.3	14.29	17.31
	39	6145	14.28	14.25	17.28
	55	6225	14.27	14.27	17.28
802.11ax HE160	71	6305	14.32	14.35	17.35
	87	6385	14.34	14.35	17.36
	15	6025	14.45	14.48	17.48
802.11be EHT40	47	6185	14.42	14.43	17.44
	79	6345	14.39	14.44	17.43
	3	5965	14.34	14.27	17.32
	11	6005	14.32	14.34	17.34
	19	6045	14.27	14.27	17.28
	27	6085	14.26	14.25	17.27
	35	6125	14.31	14.29	17.31
	43	6165	14.27	14.26	17.28
	51	6205	14.31	14.26	17.3
	59	6245	14.35	14.31	17.34
	67	6285	14.28	14.34	17.32
802.11be EHT80	75	6325	14.31	14.35	17.34
	83	6365	14.29	14.25	17.28
	91	6405	14.28	14.32	17.31
	7	5985	14.29	14.3	17.31
	23	6065	14.26	14.34	17.31
	39	6145	14.26	14.27	17.28
802.11be EHT160	55	6225	14.29	14.25	17.28
	71	6305	14.3	14.27	17.3
	87	6385	14.32	14.3	17.32
802.11be EHT160	15	6025	14.33	14.31	17.33
	47	6185	14.35	14.28	17.33
	79	6345	14.34	14.25	17.31

Conducted Power (2T2S)_SP					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	14.31	14.31	17.32
	121	6555	14.33	14.33	17.34
	125	6575	14.26	14.28	17.28
	129	6595	14.32	14.35	17.35
	133	6615	14.27	14.39	17.34
	137	6635	14.36	14.34	17.36
	141	6655	14.28	14.25	17.28
	145	6675	14.25	14.33	17.3
	149	6695	14.27	14.28	17.29
	153	6715	14.28	14.27	17.29
	157	6735	14.26	14.34	17.31
	161	6755	14.34	14.29	17.33
	165	6775	14.25	14.35	17.31
	169	6795	14.33	14.33	17.34
	173	6815	14.28	14.35	17.33
802.11ax HE40	177	6835	14.33	14.28	17.32
	181	6855	14.31	14.33	17.33
	185	6875	14.39	14.25	17.33
	123	6565	14.27	14.27	17.28
	131	6605	14.32	14.35	17.35
	139	6645	14.34	14.26	17.31
	147	6685	14.35	14.27	17.32
	155	6725	14.35	14.29	17.33
	163	6765	14.31	14.34	17.34
	171	6805	14.28	14.32	17.31
802.11ax HE80	179	6845	14.26	14.34	17.31
	187	6885	14.25	14.32	17.3
	135	6625	14.31	14.33	17.33
	151	6705	14.33	14.33	17.34
802.11ax HE160	167	6785	14.35	14.38	17.38
	183	6865	14.37	14.35	17.37
802.11be EHT20	143	6665	14.44	14.41	17.44
	175	6825	14.36	14.46	17.42
	117	6535	14.34	14.31	17.34
	121	6555	14.33	14.33	17.34
	125	6575	14.34	14.31	17.34
	129	6595	14.25	14.34	17.31
	133	6615	14.35	14.33	17.35
	137	6635	14.28	14.31	17.31
	141	6655	14.32	14.26	17.3
	145	6675	14.31	14.34	17.34
	149	6695	14.31	14.27	17.3
	153	6715	14.29	14.32	17.32
	157	6735	14.26	14.28	17.28
	161	6755	14.27	14.25	17.27
	165	6775	14.34	14.29	17.33
802.11be EHT40	169	6795	14.29	14.29	17.3
	173	6815	14.33	14.26	17.31
	177	6835	14.33	14.28	17.32
	181	6855	14.25	14.33	17.3
	185	6875	14.25	14.33	17.3
	123	6565	14.31	14.34	17.34
	131	6605	14.27	14.33	17.31
	139	6645	14.25	14.28	17.28
802.11be EHT80	147	6685	14.35	14.27	17.32
	155	6725	14.31	14.32	17.33
	163	6765	14.39	14.33	17.37
	171	6805	14.32	14.34	17.34
802.11be EHT160	179	6845	14.25	14.37	17.32
	187	6885	14.29	14.35	17.33
	135	6625	14.28	14.25	17.28
802.11be EHT80	151	6705	14.34	14.28	17.32
	167	6785	14.26	14.27	17.28
	183	6865	14.33	14.35	17.35
802.11be EHT160	143	6665	14.27	14.33	17.31
	175	6825	14.32	14.34	17.34

Conducted Power (2T2S)_LPI					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	3.27	3.34	6.32
	5	5975	3.34	3.25	6.31
	9	5995	3.31	3.29	6.31
	13	6015	3.32	3.33	6.34
	17	6035	3.33	3.35	6.35
	21	6055	3.29	3.34	6.33
	25	6075	3.29	3.35	6.33
	29	6095	3.27	3.27	6.28
	33	6115	3.33	3.29	6.32
	37	6135	3.35	3.28	6.33
	41	6155	3.33	3.29	6.32
	45	6175	3.28	3.33	6.32
	49	6195	3.28	3.26	6.28
	53	6215	3.26	3.29	6.29
	57	6235	3.33	3.32	6.34
	61	6255	3.26	3.34	6.31
	65	6275	3.28	3.34	6.32
	69	6295	3.27	3.27	6.28
	73	6315	3.25	3.31	6.29
	77	6335	3.28	3.35	6.33
81	6355	3.32	3.35	6.35	
85	6375	3.26	3.27	6.28	
89	6395	3.25	3.26	6.27	
93	6415	3.29	3.27	6.29	
802.11be EHT20	1	5955	3.51	3.56	6.55
	5	5975	3.53	3.53	6.54
	9	5995	3.51	3.54	6.54
	13	6015	3.58	3.53	6.57
	17	6035	3.58	3.55	6.58
	21	6055	3.57	3.58	6.59
	25	6075	3.51	3.59	6.56
	29	6095	3.54	3.54	6.55
	33	6115	3.53	3.52	6.54
	37	6135	3.51	3.53	6.53
	41	6155	3.54	3.53	6.55
	45	6175	3.75	3.77	6.77
	49	6195	3.77	3.77	6.78
	53	6215	3.76	3.78	6.78
	57	6235	3.84	3.85	6.86
	61	6255	3.79	3.82	6.82
	65	6275	3.83	3.81	6.83
	69	6295	3.82	3.84	6.84
	73	6315	3.75	3.83	6.8
	77	6335	3.77	3.79	6.79
81	6355	3.83	3.78	6.82	
85	6375	3.76	3.75	6.77	
89	6395	3.82	3.85	6.85	
93	6415	3.84	3.75	6.81	



Conducted Power (2T2S)_LPI					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	6.51	6.52	9.53
	11	6005	6.53	6.55	9.55
	19	6045	6.46	6.54	9.51
	27	6085	6.49	6.5	9.51
	35	6125	6.53	6.55	9.55
	43	6165	6.51	6.51	9.52
	51	6205	6.48	6.46	9.48
	59	6245	6.52	6.51	9.53
	67	6285	6.46	6.55	9.52
	75	6325	6.48	6.55	9.53
	83	6365	6.51	6.55	9.54
802.11ax HE80	91	6405	6.49	6.55	9.53
	7	5985	8.98	8.98	11.99
	23	6065	9.04	8.98	12.02
	39	6145	9.03	8.96	12.01
	55	6225	8.98	8.97	11.99
802.11ax HE160	71	6305	9.02	8.97	12.01
	87	6385	9.04	9.05	12.06
	15	6025	12.06	12.08	15.08
802.11be EHT40	47	6185	12.01	12.04	15.04
	79	6345	12.04	12.01	15.04
	3	5965	6.71	6.74	9.74
	11	6005	6.77	6.74	9.77
	19	6045	6.76	6.72	9.75
	27	6085	6.72	6.79	9.77
	35	6125	6.72	6.75	9.75
	43	6165	6.76	6.74	9.76
	51	6205	6.74	6.71	9.74
	59	6245	6.71	6.77	9.75
	67	6285	6.7	6.76	9.74
	75	6325	6.73	6.71	9.73
	83	6365	6.73	6.72	9.74
802.11be EHT80	91	6405	6.7	6.78	9.75
	7	5985	9.01	9.04	12.04
	23	6065	9.01	8.95	11.99
	39	6145	8.98	9.01	12.01
	55	6225	9.02	8.98	12.01
	71	6305	9.01	9.05	12.04
802.11be EHT160	87	6385	9.04	8.95	12.01
	15	6025	12.05	11.97	15.02
	47	6185	11.95	12.05	15.01
	79	6345	11.96	12.03	15.01

Conducted Power (2T2S)_LPI					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	3.73	3.72	6.74
	101	6455	3.78	3.79	6.8
	105	6475	3.74	3.77	6.77
	109	6495	3.74	3.77	6.77
	113	6515	3.72	3.79	6.77
802.11ax HE40	99	6445	6.72	6.78	9.76
	107	6485	6.76	6.73	9.76
	115	6525	6.24	6.24	9.25
802.11ax HE80	103	6465	9.79	9.77	12.79
	119	6545	9.28	9.29	12.3
802.11ax HE160	111	6505	12.96	12.94	15.96
802.11be EHT20	97	6435	4.39	4.41	7.41
	101	6455	4.34	4.32	7.34
	105	6475	4.32	4.35	7.35
	109	6495	4.41	4.38	7.41
	113	6515	4.37	4.36	7.38
802.11be EHT40	99	6445	6.77	6.71	9.75
	107	6485	6.73	6.78	9.77
	115	6525	6.27	6.22	9.26
802.11be EHT80	103	6465	9.75	9.75	12.76
	119	6545	9.26	9.26	12.27
802.11be EHT160	111	6505	12.93	12.91	15.93

Conducted Power (2T2S)_LPI					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	3.24	3.25	6.26
	121	6555	3.24	3.26	6.26
	125	6575	3.26	3.24	6.26
	129	6595	3.27	3.25	6.27
	133	6615	3.22	3.22	6.23
	137	6635	3.26	3.29	6.29
	141	6655	3.26	3.25	6.27
	145	6675	3.27	3.21	6.25
	149	6695	3.26	3.29	6.29
	153	6715	3.22	3.21	6.23
	157	6735	3.25	3.27	6.27
	161	6755	3.21	3.22	6.23
	165	6775	3.23	3.29	6.27
	169	6795	3.28	3.28	6.29
	173	6815	3.26	3.24	6.26
177	6835	3.28	3.23	6.27	
181	6855	3.26	3.28	6.28	
185	6875	2.71	2.76	5.75	
802.11ax HE40	123	6565	6.24	6.24	9.25
	131	6605	6.25	6.27	9.27
	139	6645	6.32	6.23	9.29
	147	6685	6.26	6.22	9.25
	155	6725	6.28	6.23	9.27
	163	6765	6.24	6.21	9.24
	171	6805	6.28	6.23	9.27
	179	6845	6.22	6.24	9.24
187	6885	7.01	6.99	10.01	
802.11ax HE80	135	6625	9.48	9.54	12.52
	151	6705	9.52	9.46	12.5
	167	6785	9.55	9.52	12.55
802.11ax HE160	183	6865	9.45	9.48	12.48
	143	6665	12.32	12.34	15.34
	175	6825	12.24	12.23	15.25
802.11be EHT20	117	6535	3.27	3.27	6.28
	121	6555	3.21	3.27	6.25
	125	6575	3.25	3.22	6.25
	129	6595	3.28	3.22	6.26
	133	6615	3.26	3.21	6.25
	137	6635	3.23	3.32	6.29
	141	6655	3.23	3.25	6.25
	145	6675	3.28	3.28	6.29
	149	6695	3.25	3.24	6.26
	153	6715	3.27	3.24	6.27
	157	6735	3.26	3.24	6.26
	161	6755	3.29	3.27	6.29
	165	6775	3.29	3.22	6.27
	169	6795	3.22	3.21	6.23
	173	6815	3.28	3.29	6.3
177	6835	3.25	3.28	6.28	
181	6855	3.26	3.28	6.28	
185	6875	2.79	2.74	5.78	
802.11be EHT40	123	6565	6.23	6.24	9.25
	131	6605	6.21	6.29	9.26
	139	6645	6.26	6.22	9.25
	147	6685	6.24	6.23	9.25
	155	6725	6.23	6.25	9.25
	163	6765	6.28	6.24	9.27
	171	6805	6.26	6.24	9.26
	179	6845	6.23	6.22	9.24
187	6885	6.96	7.01	10	
802.11be EHT80	135	6625	9.87	9.74	12.82
	151	6705	9.79	9.77	12.79
	167	6785	9.79	9.73	12.77
802.11be EHT160	183	6865	9.75	9.81	12.79
	143	6665	12.29	12.24	15.28
	175	6825	12.24	12.21	15.24

Conducted Power (2T2S)_LPI					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	4.38	4.41	7.41
	193	6915	4.39	4.32	7.37
	197	6935	4.41	4.42	7.43
	201	6955	4.35	4.34	7.36
	205	6975	4.41	4.38	7.41
	209	6995	4.33	4.43	7.39
	213	7015	4.36	4.31	7.35
	217	7035	4.34	4.36	7.36
	221	7055	4.35	4.37	7.37
	225	7075	4.43	4.34	7.4
	229	7095	4.33	4.38	7.37
	233	7115	4.34	4.35	7.36
802.11ax HE40	195	6925	6.46	6.51	9.5
	203	6965	6.53	6.49	9.52
	211	7005	6.52	6.47	9.51
	219	7045	6.53	6.52	9.54
	227	7085	6.55	6.47	9.52
802.11ax HE80	199	6945	9.79	9.72	12.77
	215	7025	9.76	9.77	12.78
802.11ax HE160	207	6985	12.92	12.91	15.93
802.11be EHT20	189	6895	4.32	4.37	7.36
	193	6915	4.38	4.38	7.39
	197	6935	4.38	4.35	7.38
	201	6955	4.41	4.36	7.4
	205	6975	4.36	4.33	7.36
	209	6995	4.39	4.36	7.39
	213	7015	4.34	4.41	7.39
	217	7035	4.32	4.32	7.33
	221	7055	4.36	4.38	7.38
	225	7075	4.34	4.36	7.36
	229	7095	4.41	4.41	7.42
	233	7115	4.38	4.42	7.41
802.11be EHT40	195	6925	6.74	6.76	9.76
	203	6965	6.71	6.73	9.73
	211	7005	6.77	6.73	9.76
	219	7045	6.78	6.74	9.77
	227	7085	6.77	6.71	9.75
802.11be EHT80	199	6945	9.74	9.75	12.76
	215	7025	9.75	9.75	12.76
802.11be EHT160	207	6985	12.81	12.89	15.86

## Appendix F. SAR and Incident Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN / BT was performed on the maximum power mode.
2. Per KDB 388624 APPENDIX OVER6G, the minimum of 5 channels to perform IPD across U-NII 5,6,7 and 8. and measured results were scaled by factor 1.545 to reported power density when measurement uncertainty exceed 30%.

### Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Front Face	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	0.16	0.189	0.19
	WLAN2.4G	802.11b	Rear Face	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	-0.01	0.164	0.16
	WLAN2.4G	802.11b	Left Side	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	-0.13	0.257	0.26
	WLAN2.4G	802.11b	Right Side	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	-0.17	0.391	0.39
	WLAN2.4G	802.11b	Top Side	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	-0.16	0.343	0.34
	WLAN2.4G	802.11b	Bottom Side	5	6	Ant 0	1T1S	99.90	1.00	15.50	15.49	1.00	0.07	0.653	0.65
	WLAN2.4G	802.11b	Front Face	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	-0.12	0.209	0.21
	WLAN2.4G	802.11b	Rear Face	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	-0.16	0.187	0.19
	WLAN2.4G	802.11b	Left Side	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	0.09	0.167	0.17
	WLAN2.4G	802.11b	Right Side	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	0.03	0.625	0.63
	WLAN2.4G	802.11b	Top Side	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	0.17	0.472	0.47
	WLAN2.4G	802.11b	Bottom Side	5	6	Ant 1	1T1S	99.90	1.00	15.50	15.48	1.00	0.11	0.652	0.65
	WLAN2.4G	802.11b	Front Face	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	-0.12	0.189	0.19
	WLAN2.4G	802.11b	Rear Face	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	-0.16	0.203	0.20
	WLAN2.4G	802.11b	Left Side	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	0.02	0.217	0.22
	WLAN2.4G	802.11b	Right Side	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	-0.03	0.371	0.37
	WLAN2.4G	802.11b	Top Side	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	-0.15	0.303	0.30
	WLAN2.4G	802.11b	Bottom Side	5	6	Ant 0	2T1S	99.90	1.00	15.50	15.49	1.00	-0.05	0.712	0.71
	WLAN2.4G	802.11b	Front Face	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	-0.19	0.199	0.20
	WLAN2.4G	802.11b	Rear Face	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	0.16	0.117	0.12
	WLAN2.4G	802.11b	Left Side	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	0.12	0.157	0.16
	WLAN2.4G	802.11b	Right Side	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	-0.01	0.615	0.62
	WLAN2.4G	802.11b	Top Side	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	-0.15	0.492	0.49
	WLAN2.4G	802.11b	Bottom Side	5	6	Ant 1	2T1S	99.90	1.00	15.50	15.48	1.00	0.11	0.682	0.68
	WLAN2.4G	802.11n HT40	Front Face	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	0.13	0.239	0.24
	WLAN2.4G	802.11n HT40	Rear Face	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	-0.16	0.203	0.20
	WLAN2.4G	802.11n HT40	Left Side	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	0.11	0.227	0.23
	WLAN2.4G	802.11n HT40	Right Side	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	-0.09	0.421	0.42
	WLAN2.4G	802.11n HT40	Top Side	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	0	0.383	0.38
1	WLAN2.4G	802.11n HT40	Bottom Side	5	6	Ant 0	2T2S	99.90	1.00	15.50	15.48	1.00	0.1	0.756	0.76
	WLAN2.4G	802.11n HT40	Front Face	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	0.17	0.269	0.27
	WLAN2.4G	802.11n HT40	Rear Face	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	0.1	0.207	0.21
	WLAN2.4G	802.11n HT40	Left Side	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	-0.14	0.217	0.22
	WLAN2.4G	802.11n HT40	Right Side	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	-0.08	0.625	0.63
	WLAN2.4G	802.11n HT40	Top Side	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	-0.05	0.542	0.54
	WLAN2.4G	802.11n HT40	Bottom Side	5	6	Ant 1	2T2S	99.90	1.00	15.50	15.49	1.00	0.12	0.715	0.72
	WLAN2.4G	802.11n HT40	Bottom Side	5	3	Ant 0	2T2S	99.90	1.00	15.50	15.41	1.02	-0.03	0.744	0.76
	WLAN2.4G	802.11n HT40	Bottom Side	5	9	Ant 0	2T2S	99.90	1.00	15.50	15.45	1.01	0.02	0.686	0.69
	WLAN2.4G	802.11n HT40	Bottom Side	5	10	Ant 0	2T2S	99.90	1.00	15.50	15.38	1.03	-0.07	0.701	0.72
	WLAN2.4G	802.11n HT40	Bottom Side	5	11	Ant 0	2T2S	99.90	1.00	15.50	15.36	1.03	0.02	0.697	0.72

### Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Front Face	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	0.17	0.212	0.22
	WLAN5.3G	802.11ac VHT160	Rear Face	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	0.07	0.077	0.08
	WLAN5.3G	802.11ac VHT160	Left Side	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	-0.08	0.382	0.39
	WLAN5.3G	802.11ac VHT160	Right Side	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	-0.06	0.021	0.02
	WLAN5.3G	802.11ac VHT160	Top Side	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	-0.15	0.21	0.21
	WLAN5.3G	802.11ac VHT160	Bottom Side	5	50	Ant 0	1T1S	99.90	1.00	14.00	13.91	1.02	0.11	0.649	0.66
	WLAN5.3G	802.11ac VHT160	Front Face	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	-0.16	0.316	0.33
	WLAN5.3G	802.11ac VHT160	Rear Face	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	0.06	0.048	0.05
	WLAN5.3G	802.11ac VHT160	Left Side	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	-0.06	0.431	0.44
	WLAN5.3G	802.11ac VHT160	Right Side	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	0.05	0.05	0.05
	WLAN5.3G	802.11ac VHT160	Top Side	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	0.14	0.42	0.43
	WLAN5.3G	802.11ac VHT160	Bottom Side	5	50	Ant 1	1T1S	99.90	1.00	14.00	13.89	1.03	-0.01	0.669	0.69
	WLAN5.3G	802.11a	Front Face	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	0.06	0.262	0.26
	WLAN5.3G	802.11a	Rear Face	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	-0.14	0.067	0.07
	WLAN5.3G	802.11a	Left Side	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	0.1	0.392	0.40
	WLAN5.3G	802.11a	Right Side	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	0.03	0.039	0.04
	WLAN5.3G	802.11a	Top Side	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	-0.04	0.27	0.27
	WLAN5.3G	802.11a	Bottom Side	5	60	Ant 0	2T1S	99.90	1.00	14.00	13.96	1.01	-0.01	0.686	0.69
	WLAN5.3G	802.11a	Front Face	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.05	0.386	0.39
	WLAN5.3G	802.11a	Rear Face	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.13	0.088	0.09
	WLAN5.3G	802.11a	Left Side	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.01	0.401	0.41
	WLAN5.3G	802.11a	Right Side	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.04	0.07	0.07
	WLAN5.3G	802.11a	Top Side	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.19	0.37	0.37
	WLAN5.3G	802.11a	Bottom Side	5	60	Ant 1	2T1S	99.90	1.00	14.00	13.94	1.01	0.01	0.658	0.66
	WLAN5.3G	802.11ac VHT160	Front Face	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	0.08	0.282	0.29
	WLAN5.3G	802.11ac VHT160	Rear Face	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	0.17	0.077	0.08
	WLAN5.3G	802.11ac VHT160	Left Side	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	-0.05	0.482	0.50
	WLAN5.3G	802.11ac VHT160	Right Side	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	-0.16	0.051	0.05
	WLAN5.3G	802.11ac VHT160	Top Side	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	-0.07	0.31	0.32
2	WLAN5.3G	802.11ac VHT160	Bottom Side	5	50	Ant 0	2T2S	99.90	1.00	14.00	13.89	1.03	0.18	0.707	0.73
	WLAN5.3G	802.11ac VHT160	Front Face	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	0.01	0.386	0.39
	WLAN5.3G	802.11ac VHT160	Rear Face	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	-0.02	0.138	0.14
	WLAN5.3G	802.11ac VHT160	Left Side	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	-0.13	0.461	0.47
	WLAN5.3G	802.11ac VHT160	Right Side	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	-0.14	0.08	0.08
	WLAN5.3G	802.11ac VHT160	Top Side	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	0.06	0.43	0.44
	WLAN5.3G	802.11ac VHT160	Bottom Side	5	50	Ant 1	2T2S	99.90	1.00	14.00	13.93	1.02	0.18	0.699	0.71

### Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.6G	802.11ac VHT160	Front Face	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	-0.06	0.251	0.25
	WLAN5.6G	802.11ac VHT160	Rear Face	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	-0.04	0.019	0.02
	WLAN5.6G	802.11ac VHT160	Left Side	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	-0.08	0.437	0.44
	WLAN5.6G	802.11ac VHT160	Right Side	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	0.14	0.033	0.03
	WLAN5.6G	802.11ac VHT160	Top Side	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	-0.09	0.278	0.28
	WLAN5.6G	802.11ac VHT160	Bottom Side	5	114	Ant 0	1T1S	99.90	1.00	14.00	13.94	1.01	0.02	0.652	0.66
	WLAN5.6G	802.11ac VHT160	Front Face	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	-0.02	0.299	0.30
	WLAN5.6G	802.11ac VHT160	Rear Face	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	-0.03	0.122	0.12
	WLAN5.6G	802.11ac VHT160	Left Side	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	-0.16	0.411	0.42
	WLAN5.6G	802.11ac VHT160	Right Side	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	-0.14	0.007	0.01
	WLAN5.6G	802.11ac VHT160	Top Side	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	0.14	0.311	0.32
	WLAN5.6G	802.11ac VHT160	Bottom Side	5	114	Ant 1	1T1S	99.90	1.00	14.00	13.91	1.02	-0.06	0.637	0.65
	WLAN5.6G	802.11a	Front Face	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.16	0.231	0.23
	WLAN5.6G	802.11a	Rear Face	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.04	0.039	0.04
	WLAN5.6G	802.11a	Left Side	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.19	0.407	0.41
	WLAN5.6G	802.11a	Right Side	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.01	0.017	0.02
	WLAN5.6G	802.11a	Top Side	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.1	0.311	0.31
	WLAN5.6G	802.11a	Bottom Side	5	116	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.08	0.682	0.69
	WLAN5.6G	802.11a	Front Face	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	-0.1	0.269	0.27
	WLAN5.6G	802.11a	Rear Face	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	0.06	0.032	0.03
	WLAN5.6G	802.11a	Left Side	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	-0.06	0.421	0.43
	WLAN5.6G	802.11a	Right Side	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	0.04	0.027	0.03
	WLAN5.6G	802.11a	Top Side	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	-0.12	0.331	0.33
	WLAN5.6G	802.11a	Bottom Side	5	116	Ant 1	2T1S	99.90	1.00	14.00	13.96	1.01	-0.08	0.647	0.65
	WLAN5.6G	802.11ac VHT160	Front Face	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	-0.08	0.291	0.30
	WLAN5.6G	802.11ac VHT160	Rear Face	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	0.07	0.079	0.08
	WLAN5.6G	802.11ac VHT160	Left Side	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	-0.11	0.497	0.51
	WLAN5.6G	802.11ac VHT160	Right Side	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	-0.15	0.053	0.05
	WLAN5.6G	802.11ac VHT160	Top Side	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	0.13	0.32	0.33
3	WLAN5.6G	802.11ac VHT160	Bottom Side	5	114	Ant 0	2T2S	99.90	1.00	14.00	13.92	1.02	-0.11	0.721	0.74
	WLAN5.6G	802.11ac VHT160	Front Face	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	0.15	0.369	0.38
	WLAN5.6G	802.11ac VHT160	Rear Face	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	-0.13	0.132	0.13
	WLAN5.6G	802.11ac VHT160	Left Side	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	-0.13	0.441	0.45
	WLAN5.6G	802.11ac VHT160	Right Side	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	-0.09	0.077	0.08
	WLAN5.6G	802.11ac VHT160	Top Side	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	-0.18	0.411	0.42
	WLAN5.6G	802.11ac VHT160	Bottom Side	5	114	Ant 1	2T2S	99.90	1.00	14.00	13.92	1.02	-0.16	0.697	0.71



### Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11ac VHT80	Front Face	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	0.08	0.196	0.20
	WLAN5.8G	802.11ac VHT80	Rear Face	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	-0.13	0.065	0.07
	WLAN5.8G	802.11ac VHT80	Left Side	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	0.19	0.452	0.46
	WLAN5.8G	802.11ac VHT80	Right Side	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	-0.15	0.021	0.02
	WLAN5.8G	802.11ac VHT80	Top Side	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	-0.07	0.223	0.23
	WLAN5.8G	802.11ac VHT80	Bottom Side	5	155	Ant 0	1T1S	99.90	1.00	14.00	13.97	1.01	0.09	0.652	0.66
	WLAN5.8G	802.11ac VHT80	Front Face	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	-0.12	0.348	0.35
	WLAN5.8G	802.11ac VHT80	Rear Face	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	-0.17	0.123	0.12
	WLAN5.8G	802.11ac VHT80	Left Side	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	-0.03	0.395	0.40
	WLAN5.8G	802.11ac VHT80	Right Side	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	0.1	0.023	0.02
	WLAN5.8G	802.11ac VHT80	Top Side	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	0.14	0.403	0.41
	WLAN5.8G	802.11ac VHT80	Bottom Side	5	155	Ant 1	1T1S	99.90	1.00	14.00	13.95	1.01	-0.16	0.681	0.69
	WLAN5.8G	802.11a	Front Face	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	0.12	0.206	0.21
	WLAN5.8G	802.11a	Rear Face	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	-0.18	0.035	0.04
	WLAN5.8G	802.11a	Left Side	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	0.13	0.412	0.41
	WLAN5.8G	802.11a	Right Side	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	0.04	0.032	0.03
	WLAN5.8G	802.11a	Top Side	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	-0.1	0.203	0.20
	WLAN5.8G	802.11a	Bottom Side	5	157	Ant 0	2T1S	99.90	1.00	14.00	13.98	1.00	-0.11	0.632	0.63
	WLAN5.8G	802.11a	Front Face	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	-0.01	0.368	0.37
	WLAN5.8G	802.11a	Rear Face	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	0.14	0.043	0.04
	WLAN5.8G	802.11a	Left Side	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	0.02	0.435	0.44
	WLAN5.8G	802.11a	Right Side	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	-0.18	0.073	0.07
	WLAN5.8G	802.11a	Top Side	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	-0.09	0.343	0.35
	WLAN5.8G	802.11a	Bottom Side	5	157	Ant 1	2T1S	99.90	1.00	14.00	13.97	1.01	-0.05	0.641	0.65
	WLAN5.8G	802.11ac VHT80	Front Face	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	-0.15	0.276	0.28
	WLAN5.8G	802.11ac VHT80	Rear Face	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	0.14	0.075	0.08
	WLAN5.8G	802.11ac VHT80	Left Side	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	-0.01	0.472	0.48
	WLAN5.8G	802.11ac VHT80	Right Side	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	0.09	0.05	0.05
	WLAN5.8G	802.11ac VHT80	Top Side	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	-0.02	0.303	0.31
5	WLAN5.8G	802.11ac VHT80	Bottom Side	5	155	Ant 0	2T2S	99.90	1.00	14.00	13.93	1.02	0.08	0.721	0.74
	WLAN5.8G	802.11ac VHT80	Front Face	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	0.11	0.398	0.40
	WLAN5.8G	802.11ac VHT80	Rear Face	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	-0.19	0.143	0.14
	WLAN5.8G	802.11ac VHT80	Left Side	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	0.02	0.475	0.48
	WLAN5.8G	802.11ac VHT80	Right Side	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	-0.14	0.083	0.08
	WLAN5.8G	802.11ac VHT80	Top Side	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	0.15	0.443	0.44
	WLAN5.8G	802.11ac VHT80	Bottom Side	5	155	Ant 1	2T2S	99.90	1.00	14.00	13.98	1.00	-0.08	0.712	0.71

### Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.9G	802.11ac VHT160	Front Face	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	-0.11	0.268	0.27
	WLAN5.9G	802.11ac VHT160	Rear Face	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	-0.09	0.052	0.05
	WLAN5.9G	802.11ac VHT160	Left Side	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	0.17	0.422	0.43
	WLAN5.9G	802.11ac VHT160	Right Side	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	0.09	0.038	0.04
	WLAN5.9G	802.11ac VHT160	Top Side	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	-0.01	0.217	0.22
	WLAN5.9G	802.11ac VHT160	Bottom Side	5	163	Ant 0	1T1S	99.90	1.00	14.00	13.95	1.01	0.08	0.709	0.72
	WLAN5.9G	802.11ac VHT160	Front Face	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	-0.05	0.37	0.37
	WLAN5.9G	802.11ac VHT160	Rear Face	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	-0.19	0.103	0.10
	WLAN5.9G	802.11ac VHT160	Left Side	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	-0.04	0.372	0.38
	WLAN5.9G	802.11ac VHT160	Right Side	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	0.15	0.067	0.07
	WLAN5.9G	802.11ac VHT160	Top Side	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	-0.03	0.332	0.34
	WLAN5.9G	802.11ac VHT160	Bottom Side	5	163	Ant 1	1T1S	99.90	1.00	14.00	13.96	1.01	0.09	0.618	0.62
	WLAN5.9G	802.11a	Front Face	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.09	0.248	0.25
	WLAN5.9G	802.11a	Rear Face	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.06	0.078	0.08
	WLAN5.9G	802.11a	Left Side	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.05	0.492	0.50
	WLAN5.9G	802.11a	Right Side	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	-0.16	0.062	0.06
	WLAN5.9G	802.11a	Top Side	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.07	0.267	0.27
	WLAN5.9G	802.11a	Bottom Side	5	173	Ant 0	2T1S	99.90	1.00	14.00	13.97	1.01	0.05	0.702	0.71
	WLAN5.9G	802.11a	Front Face	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	0.05	0.31	0.31
	WLAN5.9G	802.11a	Rear Face	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	-0.06	0.103	0.10
	WLAN5.9G	802.11a	Left Side	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	-0.17	0.362	0.37
	WLAN5.9G	802.11a	Right Side	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	0.11	0.053	0.05
	WLAN5.9G	802.11a	Top Side	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	0.09	0.372	0.38
	WLAN5.9G	802.11a	Bottom Side	5	173	Ant 1	2T1S	99.90	1.00	14.00	13.95	1.01	0.15	0.698	0.70
	WLAN5.9G	802.11ac VHT160	Front Face	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	0.05	0.288	0.29
	WLAN5.9G	802.11ac VHT160	Rear Face	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	-0.16	0.078	0.08
	WLAN5.9G	802.11ac VHT160	Left Side	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	-0.09	0.492	0.50
	WLAN5.9G	802.11ac VHT160	Right Side	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	0.01	0.052	0.05
	WLAN5.9G	802.11ac VHT160	Top Side	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	-0.12	0.317	0.32
6	WLAN5.9G	802.11ac VHT160	Bottom Side	5	163	Ant 0	2T2S	99.90	1.00	14.00	13.91	1.02	-0.08	0.713	0.73
	WLAN5.9G	802.11ac VHT160	Front Face	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	-0.06	0.37	0.37
	WLAN5.9G	802.11ac VHT160	Rear Face	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	0.13	0.133	0.13
	WLAN5.9G	802.11ac VHT160	Left Side	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	0.03	0.442	0.45
	WLAN5.9G	802.11ac VHT160	Right Side	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	0.01	0.077	0.08
	WLAN5.9G	802.11ac VHT160	Top Side	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	-0.13	0.412	0.42
	WLAN5.9G	802.11ac VHT160	Bottom Side	5	163	Ant 1	2T2S	99.90	1.00	14.00	13.96	1.01	0.01	0.698	0.70

### Body SAR Test Result

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	BT	BDR	Front Face	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	0.09	0.042	0.06
	BT	BDR	Rear Face	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	-0.08	0.029	0.04
	BT	BDR	Left Side	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	0.16	0.032	0.04
	BT	BDR	Right Side	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	-0.08	0.068	0.09
	BT	BDR	Top Side	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	0.18	0.062	0.09
7	BT	BDR	Bottom Side	5	78	Ant 1	1T1S	77.84	1.28	13.00	12.66	1.08	0.09	0.101	0.14
	BT	BDR	Bottom Side	5	0	Ant 1	1T1S	77.84	1.28	13.00	12.47	1.13	0.13	0.089	0.13
	BT	BDR	Bottom Side	5	39	Ant 1	1T1S	77.84	1.28	13.00	12.49	1.12	0.05	0.091	0.13



BUREAU  
VERITAS

SAR and Power Density Test Result

System & Position						DUT Configuration			SAR										Power Density									
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Power Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Scaled APD W/m <sup>2</sup> (4cm <sup>2</sup> )	Grid Step [λ]	iPD [W/m <sup>2</sup> ]	Scaling Factor for Measurement Uncertainty	Average Area [cm <sup>2</sup> ]	Power Drift [dB]	Normal psPD [W/m <sup>2</sup> ]	Scaled Normal psPD [W/m <sup>2</sup> ]	Total psPD [W/m <sup>2</sup> ]	Scaled Total psPD [W/m <sup>2</sup> ]	
	WLAN6G	802.11ax HE160	Front Face	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	-0.07	0.186	0.19	2.94	2.94										
	WLAN6G	802.11ax HE160	Rear Face	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	0.16	0.063	0.06	0.942	0.94										
	WLAN6G	802.11ax HE160	Left Side	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	0.1	0.414	0.41	3.57	3.57	0.125	152	1.545	4.00	0.09	1.74	2.69	1.77	2.73	
	WLAN6G	802.11ax HE160	Right Side	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	-0.06	0.038	0.04	0.484	0.48	0.125	21	1.545	4.00	0.16	0.237	0.37	0.241	0.37	
	WLAN6G	802.11ax HE160	Top Side	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	-0.16	0.244	0.24	3.34	3.34										
	WLAN6G	802.11ax HE160	Bottom Side	5	15	1T1S	Ant 0	SP	99.90	1.00	14.50	14.49	1.00	0.18	0.656	0.66	5.78	5.78										
	WLAN6G	802.11ax HE160	Front Face	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	-0.12	0.324	0.32	2.91	2.91	0.125	89	1.545	4.00	0.06	1.42	2.19	1.45	2.24	
	WLAN6G	802.11ax HE160	Rear Face	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	-0.07	0.086	0.09	0.96	0.96	0.125	26	1.545	4.00	0.07	0.47	0.73	0.478	0.74	
	WLAN6G	802.11ax HE160	Left Side	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.12	0.379	0.38	3.43	3.43										
	WLAN6G	802.11ax HE160	Right Side	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.17	0.022	0.02	0.44	0.44										
	WLAN6G	802.11ax HE160	Top Side	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	-0.11	0.348	0.35	3.21	3.21	0.125	97	1.545	4.00	0.05	1.57	2.43	1.59	2.46	
	WLAN6G	802.11ax HE160	Bottom Side	5	15	1T1S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.12	0.709	0.71	5.57	5.57	0.125	233	1.545	4.00	0.09	2.72	4.2	2.77	4.28	
	WLAN6G	802.11a	Front Face	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	0.05	0.216	0.22	2.93	2.96										
	WLAN6G	802.11a	Rear Face	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	0.01	0.033	0.03	0.936	0.95										
	WLAN6G	802.11a	Left Side	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	0.05	0.434	0.44	3.55	3.59										
	WLAN6G	802.11a	Right Side	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	0.1	0.042	0.04	0.554	0.56										
	WLAN6G	802.11a	Top Side	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	0.03	0.294	0.30	3.3	3.33										
	WLAN6G	802.11a	Bottom Side	5	45	2T1S	Ant 0	SP	99.90	1.00	14.50	14.47	1.01	-0.09	0.686	0.69	5.81	5.87										
	WLAN6G	802.11a	Front Face	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	0.01	0.294	0.30	2.83	2.86										
	WLAN6G	802.11a	Rear Face	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	-0.12	0.126	0.13	0.98	0.99										
	WLAN6G	802.11a	Left Side	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	-0.05	0.349	0.35	3.42	3.45										
	WLAN6G	802.11a	Right Side	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	0.17	0.026	0.03	0.49	0.49										
	WLAN6G	802.11a	Top Side	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	-0.06	0.328	0.33	3.25	3.28										
	WLAN6G	802.11a	Bottom Side	5	45	2T1S	Ant 1	SP	99.90	1.00	14.50	14.45	1.01	-0.02	0.679	0.69	5.61	5.67										
	WLAN6G	802.11ax HE160	Front Face	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	0.01	0.266	0.27	3.03	3.06	0.125	82	1.545	4.00	-0.08	1.48	2.29	1.5	2.34	
	WLAN6G	802.11ax HE160	Rear Face	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	0.06	0.063	0.06	1.02	1.03	0.125	19	1.545	4.00	0.01	0.499	0.77	0.508	0.79	
	WLAN6G	802.11ax HE160	Left Side	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	0.09	0.464	0.47	3.64	3.68	0.125	143	1.545	4.00	-0.17	1.78	2.75	1.81	2.82	
	WLAN6G	802.11ax HE160	Right Side	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	0.07	0.038	0.04	0.554	0.56	0.125	12	1.545	4.00	-0.01	0.271	0.42	0.276	0.43	
	WLAN6G	802.11ax HE160	Top Side	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	0.11	0.294	0.30	3.39	3.42	0.125	90	1.545	4.00	-0.08	1.66	2.56	1.68	2.62	
8	WLAN6G	802.11ax HE160	Bottom Side	5	15	2T2S	Ant 0	SP	99.90	1.00	14.50	14.45	1.01	-0.15	0.726	0.73	5.9	5.96	0.125	286	1.545	4.00	-0.04	2.89	4.47	2.94	4.59	
	WLAN6G	802.11ax HE160	Front Face	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	-0.01	0.374	0.37	2.91	2.91	0.125	120	1.545	4.00	-0.17	1.42	2.19	1.45	2.24	
	WLAN6G	802.11ax HE160	Rear Face	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.09	0.126	0.13	0.986	0.99	0.125	41	1.545	4.00	-0.06	0.482	0.74	0.491	0.76	
	WLAN6G	802.11ax HE160	Left Side	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.03	0.449	0.45	3.5	3.5	0.125	144	1.545	4.00	0.1	1.71	2.64	1.74	2.69	
	WLAN6G	802.11ax HE160	Right Side	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.15	0.068	0.07	0.533	0.53	0.125	22.0	1.545	4.00	0.16	0.261	0.4	0.265	0.41	
	WLAN6G	802.11ax HE160	Top Side	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	-0.03	0.418	0.42	3.26	3.26	0.125	22	1.545	4.00	0.19	1.59	2.46	1.62	2.5	
	WLAN6G	802.11ax HE160	Bottom Side	5	15	2T2S	Ant 1	SP	99.90	1.00	14.50	14.48	1.00	0.18	0.718	0.72	5.67	5.67	0.125	134	1.545	4.00	0.08	2.77	4.28	2.82	4.36	
	WLAN6G	802.11ax HE160	Bottom Side	5	47	2T2S	Ant 0	SP	99.90	1.00	14.50	14.42	1.02	0.03	0.693	0.71	5.54	5.65										
	WLAN6G	802.11ax HE160	Bottom Side	5	79	2T2S	Ant 0	SP	99.90	1.00	14.50	14.39	1.03	-0.12	0.708	0.73	5.76	5.93	0.125	281	1.545	4.00	0.11	2.82	4.36	2.87	4.57	
	WLAN6G	802.11ax HE160	Bottom Side	5	111	2T2S	Ant 0	LPI	99.90	1.00	13.00	12.96	1.01	0.01	0.531	0.54	4.39	4.43										
	WLAN6G	802.11ax HE160	Bottom Side	5	143	2T2S	Ant 0	SP	99.90	1.00	14.50	14.44	1.01	-0.07	0.705	0.71	5.66	5.72										
	WLAN6G	802.11ax HE160	Bottom Side	5	175	2T2S	Ant 0	SP	99.90	1.00	14.50	14.36	1.03	0.03	0.698	0.72	5.58	5.75	0.125	269	1.545	4.00	-0.07	2.73	4.22	2.78	4.42	
	WLAN6G	802.11ax HE160	Bottom Side	5	207	2T2S	Ant 0	LPI	99.90	1.00	13.00	12.92	1.02	0.02	0.524	0.53	4.35	4.44										

## Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

### <Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WLAN 5G(2Tx) + BT	Yes
B	WLAN 6G(2Tx) + BT	Yes
C	WLAN 2.4G(1Tx) + WLAN 5G(1Tx)	Yes
D	WLAN 2.4G(1Tx) + WLAN 6G(1Tx)	Yes

#### Notes

1. The WLAN 2.4G and BT cannot transmit simultaneously.

Simultaneous Transmission SAR Evaluation												
Position	1	2	3	4	5	6	7	8	A(3+4+8)	B(6+7+8)	C(1+2)	D(1+5)
	Max WLAN 2.4GHz 1T	Max WLAN 5GHz 1T	Max WLAN 5GHz 2T Ant 0	Max WLAN 5GHz 2T Ant 1	Max WLAN 6GHz 1T	Max WLAN 6GHz 2T Ant 0	Max WLAN 6GHz 2T Ant 1	Max BT Ant 1	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg				
Front Face	0.21	0.37	0.30	0.40	0.32	0.27	0.37	0.06	0.76	0.70	0.58	0.53
Rear Face	0.19	0.12	0.08	0.14	0.09	0.06	0.13	0.04	0.26	0.23	0.31	0.28
Left Side	0.26	0.46	0.51	0.48	0.41	0.47	0.45	0.04	1.03	0.96	0.72	0.67
Right Side	0.63	0.07	0.06	0.08	0.04	0.04	0.07	0.09	0.23	0.20	0.70	0.67
Top Side	0.47	0.43	0.33	0.44	0.35	0.30	0.42	0.09	0.86	0.81	0.90	0.82
Bottom Side	0.65	0.72	0.74	0.71	0.71	0.73	0.72	0.14	1.59	1.59	1.37	1.36

Total Exposure Ratio ( Body )_FCC							
Position	1	5	6	7	8	B(6+7+8)	D(1+5)
	Max WLAN 2.4GHz 1T	Max WLAN 6GHz 1T	Max WLAN 6GHz 2T Ant 0	Max WLAN 6GHz 2T Ant 1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio
	1g SAR W/kg	4cm <sup>2</sup> W/m <sup>2</sup>	4cm <sup>2</sup> W/m <sup>2</sup>	4cm <sup>2</sup> W/m <sup>2</sup>	1g SAR W/kg		
Applicable Limit	1.6 W/kg	10 W/m <sup>2</sup>	10 W/m <sup>2</sup>	10 W/m <sup>2</sup>	1.6 W/kg		
Front Face	0.21	2.24	2.34	2.24	0.06	0.50	0.36
Rear Face	0.19	0.74	0.79	0.76	0.04	0.18	0.19
Left Side	0.26	2.73	2.82	2.69	0.04	0.58	0.44
Right Side	0.63	0.37	0.43	0.41	0.09	0.14	0.43
Top Side	0.47	2.46	2.62	2.50	0.09	0.57	0.54
Bottom Side	0.65	4.28	4.59	4.36	0.14	0.98	0.83

## Appendix Z. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT**

Certificate No: **D2450V2-737\_Feb23**

**CALIBRATION CERTIFICATE**

Object **D2450V2 - SN:737**

Calibration procedure(s) **QA CAL-05.v12  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **February 20, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	10-Jan-23 (No. EX3-7349_Jan23)	Jan-24
DAE4	SN: 601	19-Dec-22 (No. DAE4-601_Dec22)	Dec-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Paulo Pina** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Niels Kuster** (Name) / **Quality Manager** (Function) / *[Signature]* (Signature)

Issued: February 20, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY52	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	39.3 ± 6 %	1.85 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>50.4 W/kg ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.97 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.7 W/kg ± 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.8 $\Omega$ + 4.9 j $\Omega$
Return Loss	- 23.7 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 20.02.2023

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:737**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 10.01.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.6 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 25.0 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.97 W/kg**

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%


Maximum value of SAR (measured) = 20.9 W/kg

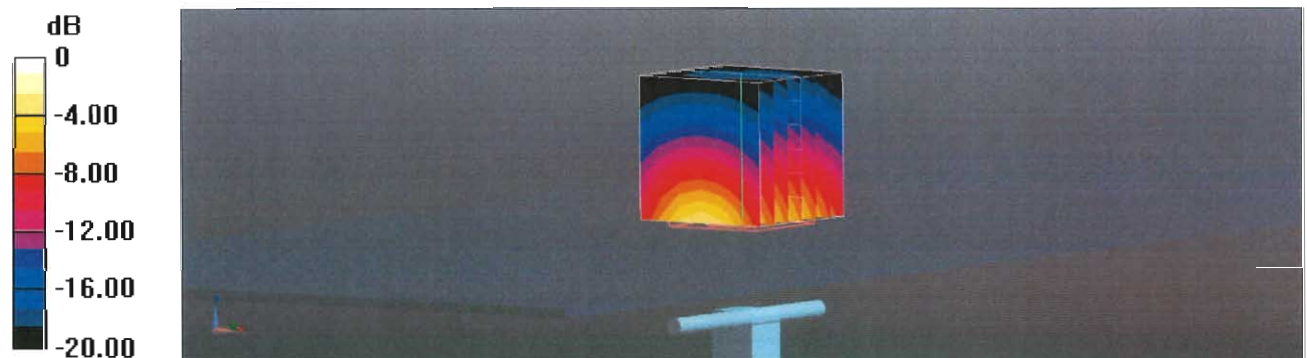

0 dB = 20.9 W/kg = 13.20 dBW/kg



# Impedance Measurement Plot for Head TSL

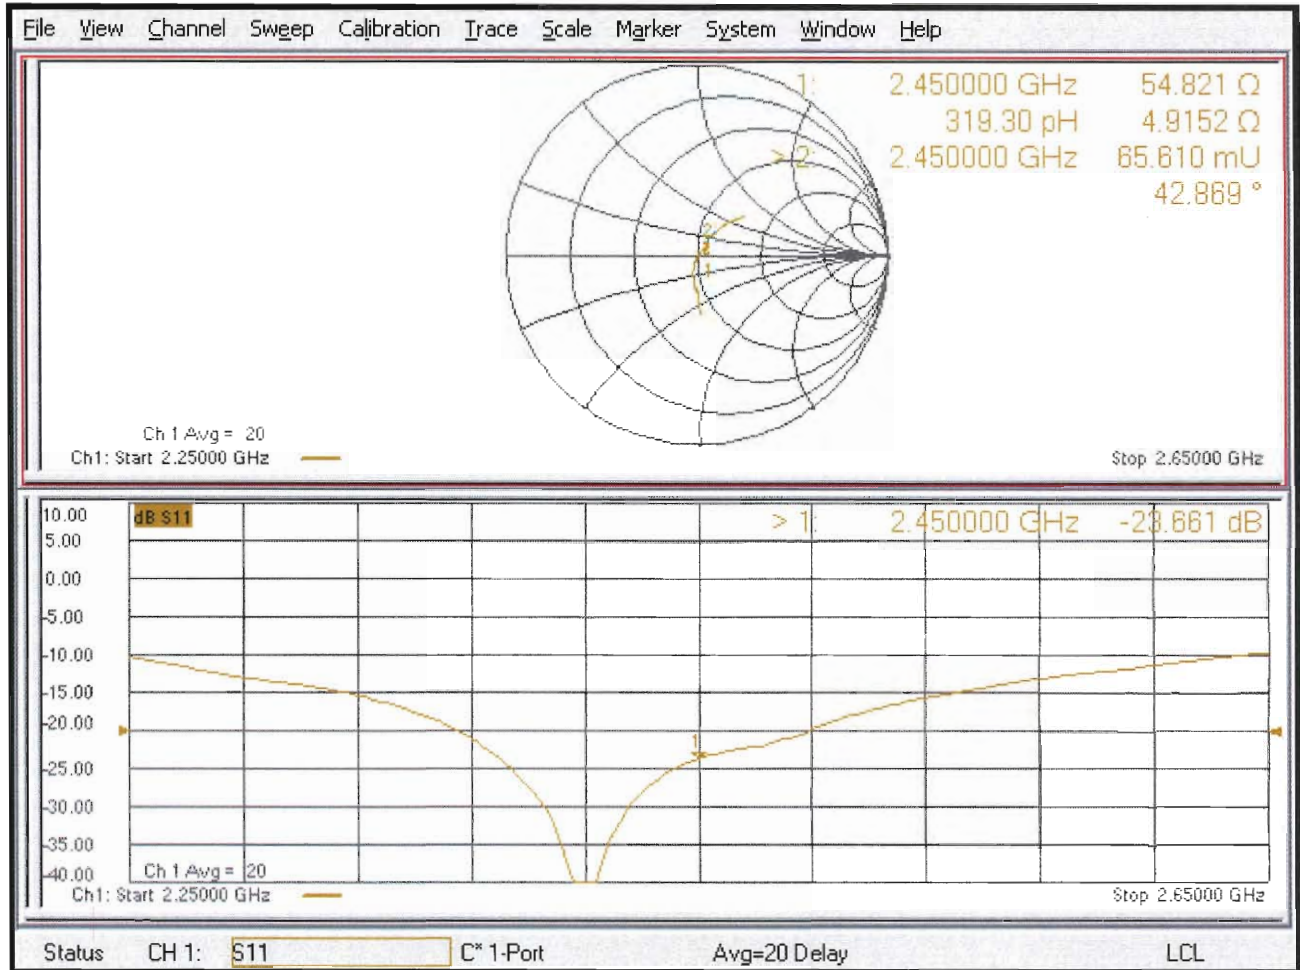



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT**

Certificate No: **D5GHzV2-1019\_Feb23**

**CALIBRATION CERTIFICATE**

Object **D5GHzV2 - SN:1019**

Calibration procedure(s) **QA CAL-22.v7  
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **February 22, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 3503	08-Mar-22 (No. EX3-3503_Mar22)	Mar-23
DAE4	SN: 601	19-Dec-22 (No. DAE4-601_Dec22)	Dec-23

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-22)	In house check: Oct-24
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-22)	In house check: Oct-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Name: Paulo Pina, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Niels Kuster, Function: Quality Manager, Signature: [Signature]**

Issued: February 23, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- c) DASY System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions*: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL*: The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss*: This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured*: SAR measured at the stated antenna input power.
- *SAR normalized*: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters*: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY52	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.9	4.71 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	36.0 ± 6 %	4.67 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5250 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>80.1 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.9 W/kg ± 19.5 % (k=2)</b>

## Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.5	5.07 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	35.9 ± 6 %	5.06 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5600 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>83.0 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.7 W/kg ± 19.5 % (k=2)</b>

## Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.6 ± 6 %	5.21 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>80.2 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.5 W/kg ± 19.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	52.6 $\Omega$ - 3.4 j $\Omega$
Return Loss	- 27.5 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.8 $\Omega$ + 0.1 j $\Omega$
Return Loss	- 22.9 dB

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.2 $\Omega$ + 4.7 j $\Omega$
Return Loss	- 23.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 22.02.2023

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1019**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.67$  S/m;  $\epsilon_r = 36$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.06$  S/m;  $\epsilon_r = 35.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.21$  S/m;  $\epsilon_r = 35.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 08.03.2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.93 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 27.2 W/kg

**SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.29 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 71%

Maximum value of SAR (measured) = 17.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 8.28 W/kg; SAR(10 g) = 2.36 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 19.1 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.20 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.25 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm


Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 19.0 W/kg

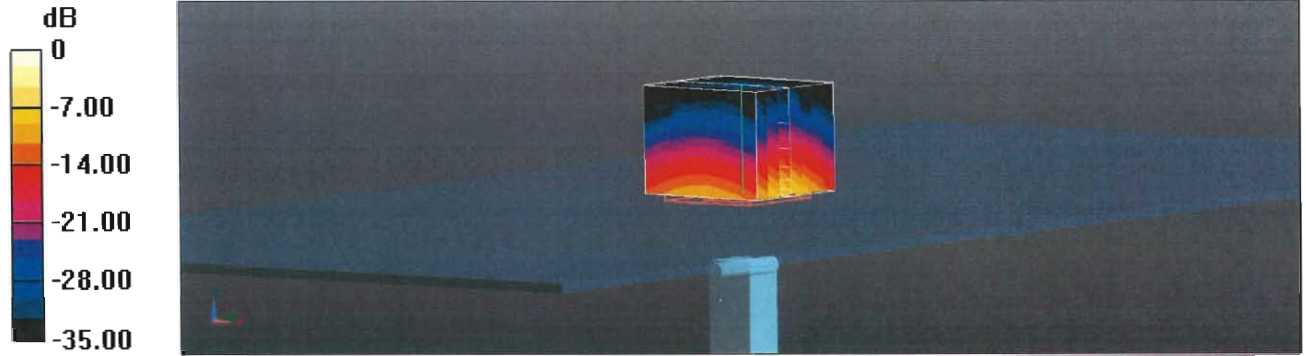

0 dB = 19.1 W/kg = 12.81 dBW/kg

# Impedance Measurement Plot for Head TSL

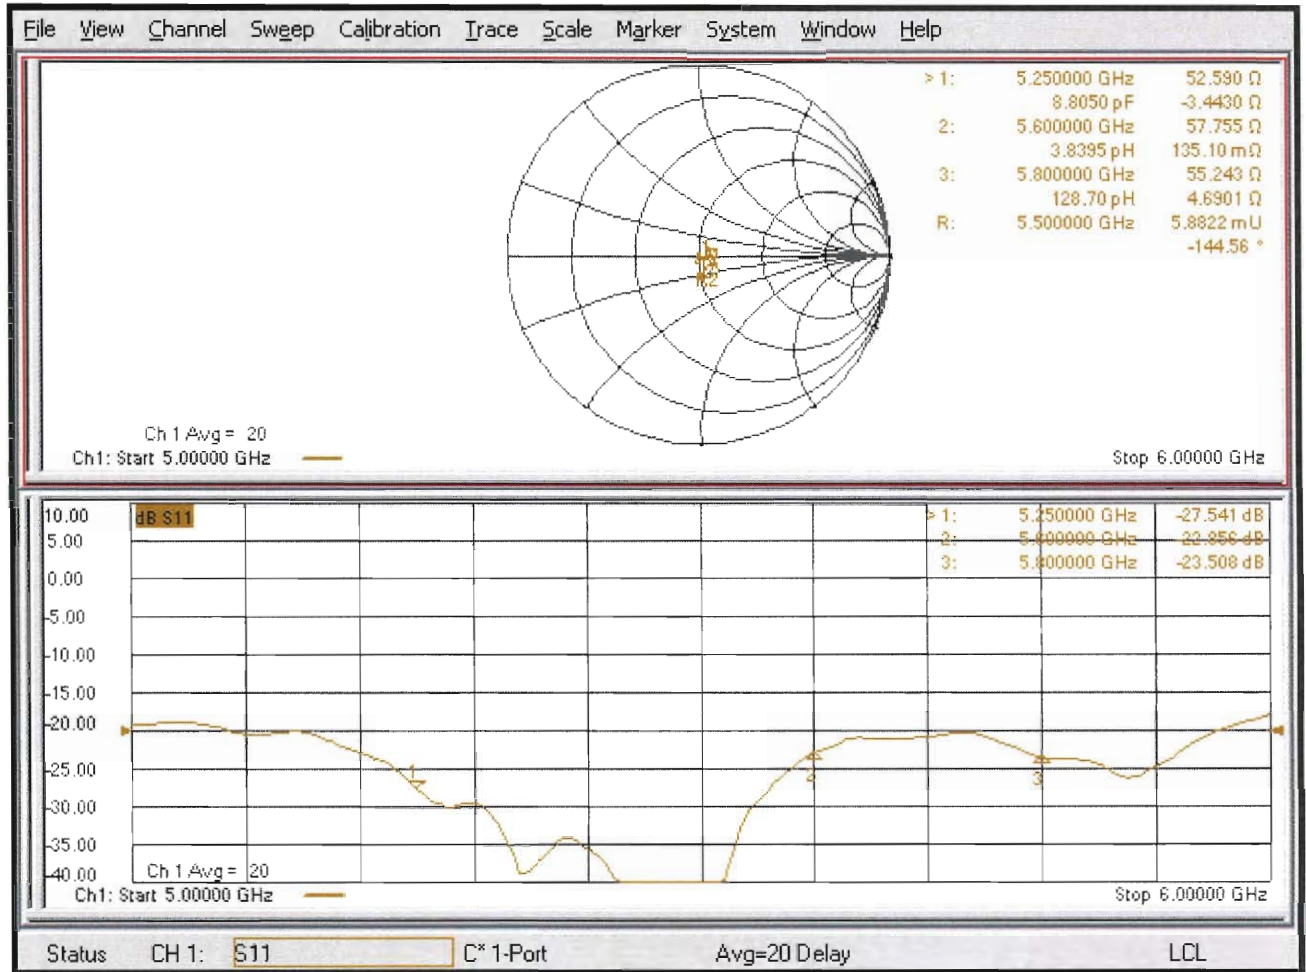



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT**  
Taoyuan City

Certificate No. **D6.5GHzV2-1008\_Sep23**

## CALIBRATION CERTIFICATE

Object **D6.5GHzV2 - SN:1008**

Calibration procedure(s) **QA CAL-22 v7  
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **September 21, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power sensor R&S NRP33T	SN: 100967	03-Apr-23 (No. 217-03806)	Apr-24
Reference 20 dB Attenuator	SN: BH9394 (20k)	30-Mar-23 (No. 217-03809)	Mar-24
Mismatch combination	SN: 84224 / 360D	03-Apr-23 (No. 217-03812)	Apr-24
Reference Probe EX3DV4	SN: 7405	12-Jun-23 (No. EX3-7405_Jun23)	Jun-24
DAE4	SN: 908	03-Jul-23 (No. DAE4-908_Jul23)	Jul-24

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator Anapico APSIN20G	SN: 827	18-Dec-18 (in house check Dec-21)	In house check: Dec-23
Power sensor NRP-Z23	SN: 100169	10-Jan-19 (in house check Nov-22)	In house check: Nov-23
Power sensor NRP-18T	SN: 100950	28-Sep-22 (in house check Nov-22)	In house check: Nov-23
Network Analyzer Keysight E5063A	SN:MY54504221	31-Oct-19 (in house check Oct-22)	In house check: Oct-25

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Sven Kühn	Technical Manager	

Issued: September 21, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range Of 4 MHz To 10 GHz)", October 2020.

### Additional Documentation:

- b) DASY System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.
- *The absorbed power density (APD):* The absorbed power density is evaluated according to Samaras T, Christ A, Kuster N, "Compliance assessment of the epithelial or absorbed power density above 6 GHz using SAR measurement systems", Bioelectromagnetics, 2021 (submitted). The additional evaluation uncertainty of 0.55 dB (rectangular distribution) is considered.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY6	V16.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	5 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 3.4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	6500 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	34.5	6.07 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	33.3 $\pm$ 6 %	6.09 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	29.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>292 W/kg <math>\pm</math> 24.7 % (k=2)</b>

<b>SAR averaged over 8 cm<sup>3</sup> (8 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	6.65 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>65.9 W/kg <math>\pm</math> 24.4 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	5.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>53.9 W/kg <math>\pm</math> 24.4 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.2 $\Omega$ - 6.9 j $\Omega$
Return Loss	- 23.0 dB

### APD (Absorbed Power Density)

APD averaged over 1 cm <sup>2</sup>	Condition	
APD measured	100 mW input power	291 W/m <sup>2</sup>
APD measured	normalized to 1W	<b>2910 W/m<sup>2</sup> <math>\pm</math> 29.2 % (k=2)</b>

APD averaged over 4 cm <sup>2</sup>	condition	
APD measured	100 mW input power	133 W/m <sup>2</sup>
APD measured	normalized to 1W	<b>1330 W/m<sup>2</sup> <math>\pm</math> 28.9 % (k=2)</b>

\*The reported APD values have been derived using the psSAR1g and psSAR8g.

### General Antenna Parameters and Design

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

# DASY6 Validation Report for Head TSL

Measurement Report for D6.5GHz-1008, UID 0 -, Channel 6500 (6500.0MHz)

## Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
D6.5GHz	10.0 x 10.0 x 10.0	SN: 1008	-

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Cond. [S/m]	TSL Permittivity
Flat, HSL	5.00	Band	CW,	6500	5.50	6.09	33.3

## Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
MFP V8.0 Center - 1182	HBBL600-10000V6	EX3DV4 - SN7405, 2023-06-12	DAE4 Sn908, 2023-07-03

## Scan Setup

	Zoom Scan
Grid Extents [mm]	22.0 x 22.0 x 22.0
Grid Steps [mm]	3.4 x 3.4 x 1.4
Sensor Surface [mm]	1.4
Graded Grid	Yes
Grading Ratio	1.4
MAIA	N/A
Surface Detection	VMS + 6p
Scan Method	Measured

## Measurement Results

	Zoom Scan
Date	2023-09-21, 12:35
psSAR1g [W/Kg]	29.4
psSAR8g [W/Kg]	6.65
psSAR10g [W/Kg]	5.44
Power Drift [dB]	0.02
Power Scaling	Disabled
Scaling Factor [dB]	
TSL Correction	No correction
M2/M1 [%]	50.7
Dist 3dB Peak [mm]	4.6

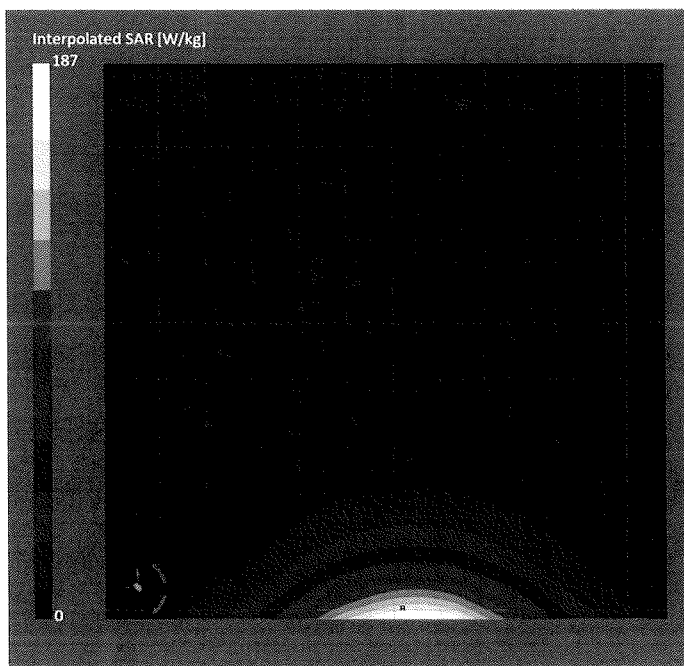


# Impedance Measurement Plot for Head TSL

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

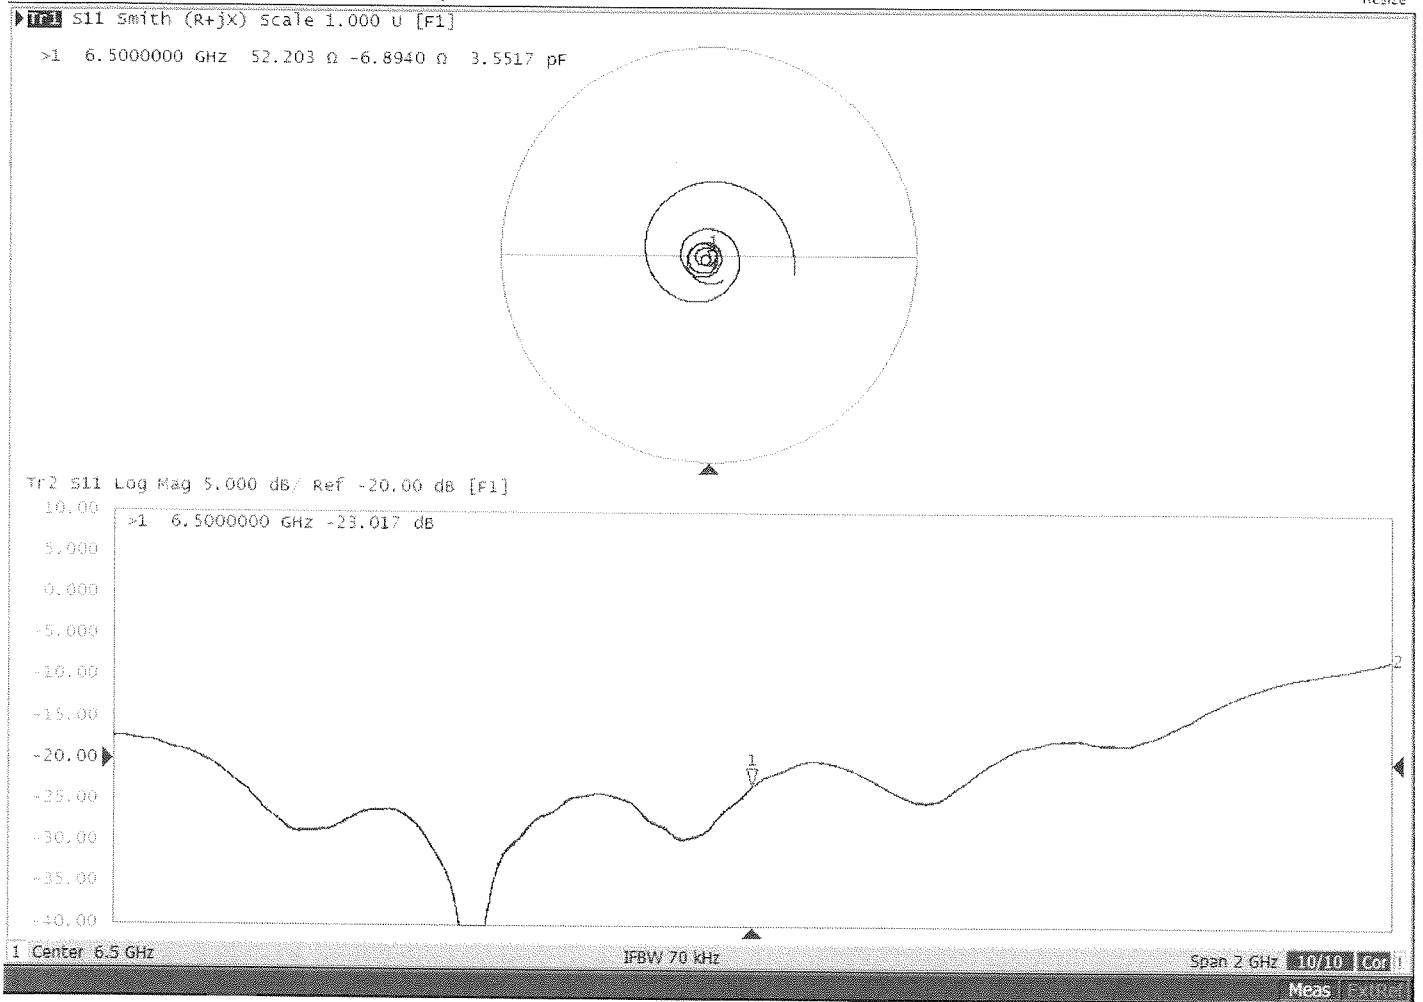



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **5G-Veri10-1025\_Jan23**

## CALIBRATION CERTIFICATE

Object **5G Verification Source 10 GHz - SN: 1025**

Calibration procedure(s) **QA CAL-45.v4  
Calibration procedure for sources in air above 6 GHz**

Calibration date: **January 19, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Reference Probe EUmWV3	SN: 9374	2023-01-03(No. EUmWV3-9374_Jan23)	Jan-24
DAE4ip	SN: 1602	2022-06-27 (No. DAE4ip-1602_Jun22)	Jun-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMF100A	SN: 100184	19-May-22 (in house check Nov-22)	In house check: Nov-23
Power sensor R&S NRP18S-10	SN: 101258	31-May-22 (in house check Nov-22)	In house check: Nov-23

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Sven Kühn	Technical Manager	

Issued: February 8, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary

CW                      Continuous wave

## Calibration is Performed According to the Following Standards

- Internal procedure QA CAL-45, Calibration procedure for sources in air above 6 GHz.
- IEC/IEEE 63195-1, "Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz)", May 2022

## Methods Applied and Interpretation of Parameters

- *Coordinate System:* z-axis in the waveguide horn boresight, x-axis is in the direction of the E-field, y-axis normal to the others in the field scanning plane parallel to the horn flare and horn flange.
- *Measurement Conditions:* (1) 10 GHz: The radiated power is the forward power to the horn antenna minus ohmic and mismatch loss. The forward power is measured prior and after the measurement with a power sensor. During the measurements, the horn is directly connected to the cable and the antenna ohmic and mismatch losses are determined by far-field measurements. (2) 30, 45, 60 and 90 GHz: The verification sources are switched on for at least 30 minutes. Absorbers are used around the probe cub and at the ceiling to minimize reflections.
- *Horn Positioning:* The waveguide horn is mounted vertically on the flange of the waveguide source to allow vertical positioning of the EUmmW probe during the scan. The plane is parallel to the phantom surface. Probe distance is verified using mechanical gauges positioned on the flare of the horn.
- *E- field distribution:* E field is measured in two x-y-plane (10mm, 10mm +  $\lambda/4$ ) with a vectorial E-field probe. The E-field value stated as calibration value represents the E-field-maxima and the averaged (1cm<sup>2</sup> and 4cm<sup>2</sup>) power density values at 10mm in front of the horn.
- *Field polarization:* Above the open horn, linear polarization of the field is expected. This is verified graphically in the field representation.

## Calibrated Quantity

- Local peak E-field (V/m) and average of peak spatial components of the poynting vector (W/m<sup>2</sup>) averaged over the surface area of 1 cm<sup>2</sup> and 4cm<sup>2</sup> at the nominal operational frequency of the verification source. Both square and circular averaging results are listed.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY8 Module mmWave	V3.2
<b>Phantom</b>	5G Phantom	
<b>Distance Horn Aperture - plane</b>	10 mm	
<b>XY Scan Resolution</b>	dx, dy = 7.5 mm	
<b>Number of measured planes</b>	2 (10mm, 10mm + $\lambda/4$ )	
<b>Frequency</b>	10 GHz $\pm$ 10 MHz	

## Calibration Parameters, 10 GHz

### Circular Averaging

Distance Horn Aperture to Measured Plane	<i>Prad</i> <sup>1</sup> (mW)	Max E-field (V/m)	Uncertainty (k = 2)	Avg Power Density Avg (psPDn+, psPDtot+, psPDmod+) (W/m <sup>2</sup> )		Uncertainty (k = 2)
				1 cm <sup>2</sup>	4 cm <sup>2</sup>	
10 mm	86.1	154	1.27 dB	57.6	53.6	1.28 dB

Distance Horn Aperture to Measured Plane	<i>Prad</i> <sup>1</sup> (mW)	Max E-field (V/m)	Uncertainty (k = 2)	Power Density psPDn+, psPDtot+, psPDmod+ (W/m <sup>2</sup> )		Uncertainty (k = 2)
				1 cm <sup>2</sup>	4 cm <sup>2</sup>	
10 mm	86.1	154	1.27 dB	55.7, 58.5, 58.7	51.7, 54.4, 54.7	1.28 dB

### Square Averaging

Distance Horn Aperture to Measured Plane	<i>Prad</i> <sup>1</sup> (mW)	Max E-field (V/m)	Uncertainty (k = 2)	Avg Power Density Avg (psPDn+, psPDtot+, psPDmod+) (W/m <sup>2</sup> )		Uncertainty (k = 2)
				1 cm <sup>2</sup>	4 cm <sup>2</sup>	
10 mm	86.1	154	1.27 dB	57.6	53.5	1.28 dB

Distance Horn Aperture to Measured Plane	<i>Prad</i> <sup>1</sup> (mW)	Max E-field (V/m)	Uncertainty (k = 2)	Power Density psPDn+, psPDtot+, psPDmod+ (W/m <sup>2</sup> )		Uncertainty (k = 2)
				1 cm <sup>2</sup>	4 cm <sup>2</sup>	
10 mm	86.1	154	1.27 dB	55.6, 58.5, 58.7	51.6, 54.3, 54.6	1.28 dB

### Max Power Density

Distance Horn Aperture to Measured Plane	<i>Prad</i> <sup>1</sup> (mW)	Max E-field (V/m)	Uncertainty (k = 2)	Max Power Density Sn, Stot,  Stot  (W/m <sup>2</sup> )	Uncertainty (k = 2)
				57.2, 60.3, 60.4	
10 mm	86.1	154	1.27 dB		1.28 dB

<sup>1</sup> Assessed ohmic and mismatch loss plus numerical offset: 0.55 dB



# DASY Report

## Measurement Report for 5G Verification Source 10 GHz, UID 0 -, Channel 10000 (10000.0MHz)

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
5G Verification Source 10 GHz	100.0 x 100.0 x 172.0	SN: 1025	-

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group,	Frequency [MHz], Channel Number	Conversion Factor
5G -	10.0 mm	Validation band	CW	10000.0, 10000	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave Phantom - 1002	Air	EUmmWV3 - SN9374_F1-55GHz, 2023-01-03	DAE4ip Sn1602, 2022-06-27

### Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	MAIA not used

### Measurement Results

	5G Scan
Date	2023-01-19, 13:57
Avg. Area [cm <sup>2</sup> ]	1.00
Avg. Type	Circular Averaging
psPDn+ [W/m <sup>2</sup> ]	55.7
psPDtot+ [W/m <sup>2</sup> ]	58.5
psPDmod+ [W/m <sup>2</sup> ]	58.7
Max(Sn) [W/m <sup>2</sup> ]	57.2
Max(Stot) [W/m <sup>2</sup> ]	60.3
Max( Stot ) [W/m <sup>2</sup> ]	60.4
E <sub>max</sub> [V/m]	154
Power Drift [dB]	0.00

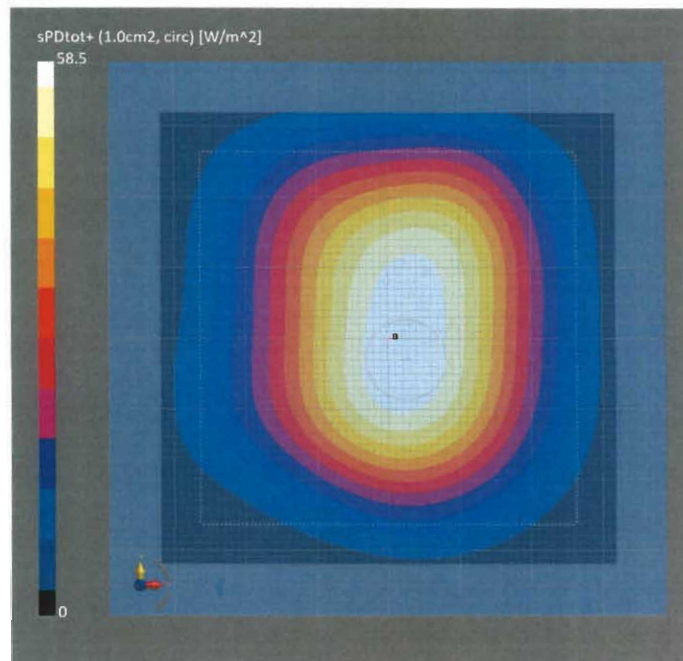



# DASY Report

## Measurement Report for 5G Verification Source 10 GHz, UID 0 -, Channel 10000 (10000.0MHz)

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
5G Verification Source 10 GHz	100.0 x 100.0 x 172.0	SN: 1025	-

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group,	Frequency [MHz], Channel Number	Conversion Factor
5G -	10.0 mm	Validation band	CW	10000.0, 10000	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave Phantom - 1002	Air	EUmmWV3 - SN9374_F1-55GHz, 2023-01-03	DAE4ip Sn1602, 2022-06-27

### Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	MAIA not used

### Measurement Results

	5G Scan
Date	2023-01-19, 13:57
Avg. Area [cm <sup>2</sup> ]	4.00
Avg. Type	Circular Averaging
psPDn+ [W/m <sup>2</sup> ]	51.7
psPDtot+ [W/m <sup>2</sup> ]	54.4
psPDmod+ [W/m <sup>2</sup> ]	54.7
Max(Sn) [W/m <sup>2</sup> ]	57.2
Max(Stot) [W/m <sup>2</sup> ]	60.3
Max( Stot ) [W/m <sup>2</sup> ]	60.4
E <sub>max</sub> [V/m]	154
Power Drift [dB]	0.00

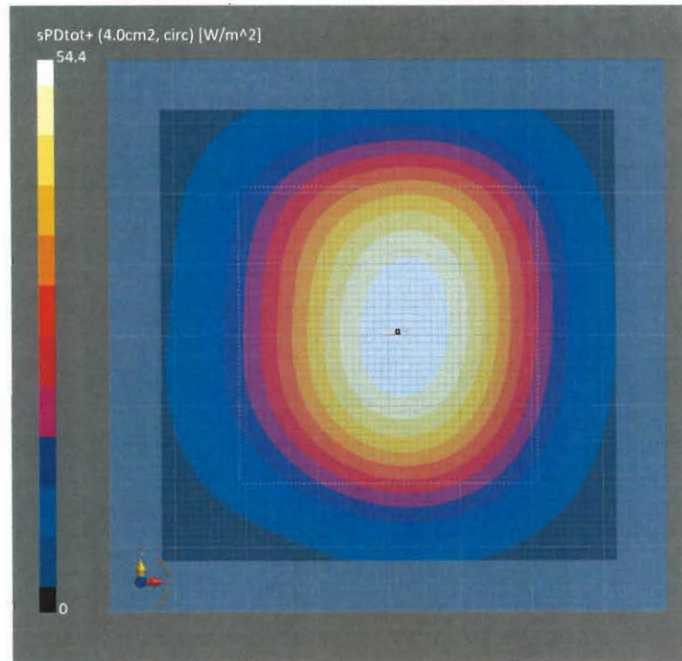

# DASY Report

## Measurement Report for 5G Verification Source 10 GHz, UID 0 -, Channel 10000 (10000.0MHz)

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
5G Verification Source 10 GHz	100.0 x 100.0 x 172.0	SN: 1025	-

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group,	Frequency [MHz], Channel Number	Conversion Factor
5G -	10.0 mm	Validation band	CW	10000.0, 10000	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave Phantom - 1002	Air	EUmmWV3 - SN9374_F1-55GHz, 2023-01-03	DAE4ip Sn1602, 2022-06-27

### Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	MAIA not used

### Measurement Results

	5G Scan
Date	2023-01-19, 13:57
Avg. Area [cm <sup>2</sup> ]	1.00
Avg. Type	Square Averaging
psPDn+ [W/m <sup>2</sup> ]	55.6
psPDtot+ [W/m <sup>2</sup> ]	58.5
psPDmod+ [W/m <sup>2</sup> ]	58.7
Max(Sn) [W/m <sup>2</sup> ]	57.2
Max(Stot) [W/m <sup>2</sup> ]	60.3
Max( Stot ) [W/m <sup>2</sup> ]	60.4
E <sub>max</sub> [V/m]	154
Power Drift [dB]	0.00

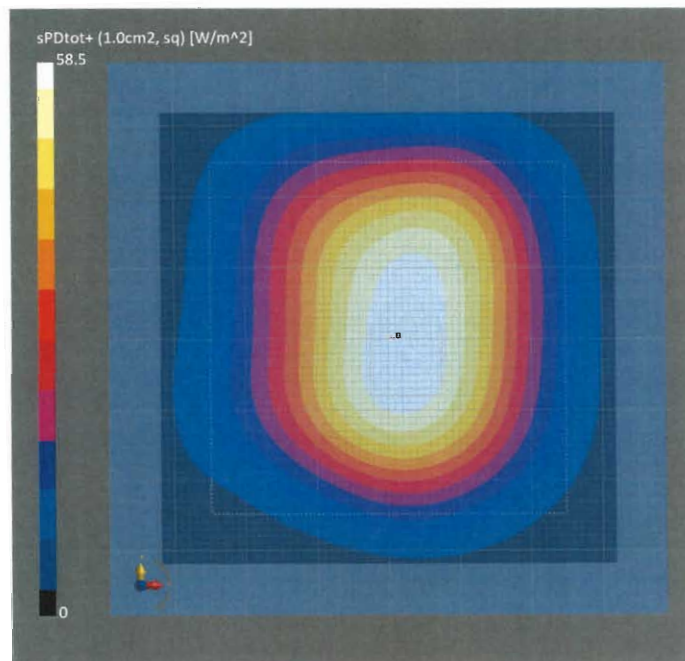

# DASY Report

## Measurement Report for 5G Verification Source 10 GHz, UID 0 -, Channel 10000 (10000.0MHz)

### Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
5G Verification Source 10 GHz	100.0 x 100.0 x 172.0	SN: 1025	-

### Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group,	Frequency [MHz], Channel Number	Conversion Factor
5G -	10.0 mm	Validation band	CW	10000.0, 10000	1.0

### Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave Phantom - 1002	Air	EUmmWV3 - SN9374_F1-55GHz, 2023-01-03	DAE4ip Sn1602, 2022-06-27

### Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0
MAIA	MAIA not used

### Measurement Results

	5G Scan
Date	2023-01-19, 13:57
Avg. Area [cm <sup>2</sup> ]	4.00
Avg. Type	Square Averaging
psPDn+ [W/m <sup>2</sup> ]	51.6
psPDtot+ [W/m <sup>2</sup> ]	54.3
psPDmod+ [W/m <sup>2</sup> ]	54.6
Max(Sn) [W/m <sup>2</sup> ]	57.2
Max(Stot) [W/m <sup>2</sup> ]	60.3
Max( Stot ) [W/m <sup>2</sup> ]	60.4
E <sub>max</sub> [V/m]	154
Power Drift [dB]	0.00

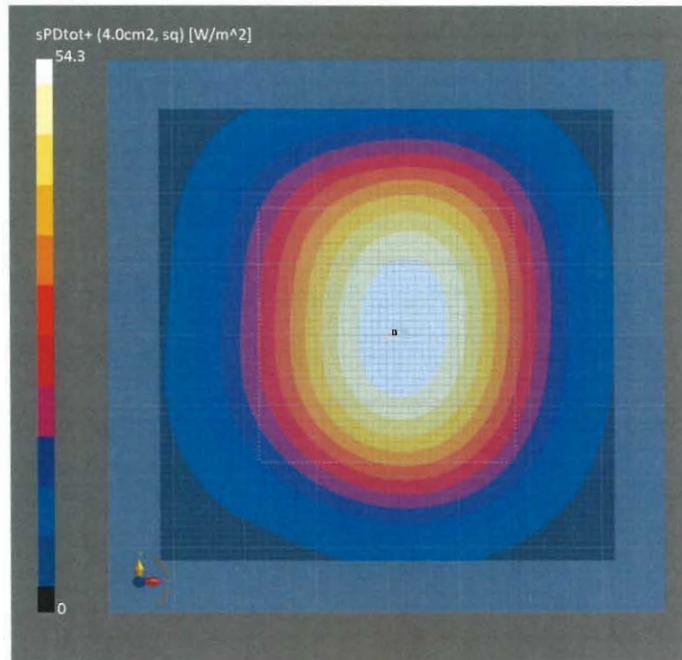

**Calibration Laboratory of**

Schmid & Partner  
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

**B.V. ADT**  
Taoyuan City

Certificate No.

**EX-7554\_Sep23**

**CALIBRATION CERTIFICATE**

Object

EX3DV4 - SN:7554

Calibration procedure(s)

QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,  
QA CAL-25.v8  
Calibration procedure for dosimetric E-field probes

Calibration date

September 19, 2023

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.  
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.  
Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
OCP DAK-3.5 (weighted)	SN: 1249	20-Oct-22 (OCP-DAK3.5-1249_Oct22)	Oct-23
OCP DAK-12	SN: 1016	20-Oct-22 (OCP-DAK12-1016_Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Aidonia Georgiadou	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: September 21, 2023

## Calibration Laboratory of

Schmid & Partner  
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

## Parameters of Probe: EX3DV4 - SN:7554

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.64	0.69	0.61	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	101.3	100.8	101.2	$\pm 4.7\%$

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> k = 2
0	CW	X	0.00	0.00	1.00	0.00	124.2	$\pm 1.1\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		140.0		
		Z	0.00	0.00	1.00		120.3		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	90.57	20.63	10.00	60.0	$\pm 3.5\%$	$\pm 9.6\%$
		Y	20.00	90.50	20.16		60.0		
		Z	3.65	69.15	11.82		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	91.22	20.22	6.99	80.0	$\pm 2.2\%$	$\pm 9.6\%$
		Y	20.00	91.42	19.61		80.0		
		Z	3.72	70.79	11.67		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	95.08	21.04	3.98	95.0	$\pm 0.9\%$	$\pm 9.6\%$
		Y	20.00	93.43	19.30		95.0		
		Z	8.54	78.90	13.36		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	102.52	23.40	2.22	120.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	20.00	94.14	18.36		120.0		
		Z	19.93	86.30	14.60		120.0		
10387	QPSK Waveform, 1 MHz	X	1.88	68.34	16.47	1.00	150.0	$\pm 2.7\%$	$\pm 9.6\%$
		Y	1.52	64.67	13.84		150.0		
		Z	1.55	65.28	14.20		150.0		
10388	QPSK Waveform, 10 MHz	X	2.55	70.50	17.20	0.00	150.0	$\pm 1.1\%$	$\pm 9.6\%$
		Y	2.03	66.36	14.64		150.0		
		Z	2.05	66.72	14.96		150.0		
10396	64-QAM Waveform, 100 kHz	X	3.40	73.59	20.62	3.01	150.0	$\pm 0.8\%$	$\pm 9.6\%$
		Y	2.81	69.60	18.36		150.0		
		Z	2.82	70.76	19.10		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.67	68.06	16.44	0.00	150.0	$\pm 1.8\%$	$\pm 9.6\%$
		Y	3.40	66.47	15.29		150.0		
		Z	3.41	66.59	15.41		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.98	66.09	15.90	0.00	150.0	$\pm 3.8\%$	$\pm 9.6\%$
		Y	4.80	65.37	15.31		150.0		
		Z	4.77	65.44	15.35		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Linearization parameter uncertainty for maximum specified field strength.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## Parameters of Probe: EX3DV4 - SN:7554

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ V <sup>-1</sup>	T1 msV <sup>-2</sup>	T2 msV <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
x	47.2	351.73	35.55	27.24	0.00	5.10	1.25	0.26	1.01
y	44.5	335.81	36.04	16.27	0.00	5.10	0.88	0.31	1.01
z	40.8	304.38	35.31	17.07	0.00	5.01	1.65	0.08	1.01

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	46.4°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Note:** Measurement distance from surface can be increased to 3–4 mm for an *Area Scan* job.

## Parameters of Probe: EX3DV4 - SN:7554

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
750	41.9	0.89	9.89	9.45	9.52	0.39	1.27	±12.0%
835	41.5	0.90	10.15	9.39	9.48	0.38	1.27	±12.0%
1450	40.5	1.20	8.68	8.34	8.39	0.50	1.27	±12.0%
1750	40.1	1.37	8.84	8.66	8.73	0.28	1.27	±12.0%
1900	40.0	1.40	8.64	8.37	8.43	0.32	1.27	±12.0%
2000	40.0	1.40	8.20	7.99	8.03	0.31	1.27	±12.0%
2300	39.5	1.67	8.04	7.87	7.88	0.33	1.27	±12.0%
2450	39.2	1.80	7.71	7.55	7.54	0.32	1.27	±12.0%
2600	39.0	1.96	7.77	7.63	7.62	0.32	1.27	±12.0%
3300	38.2	2.71	6.93	6.79	6.82	0.34	1.27	±14.0%
3500	37.9	2.91	7.03	6.90	6.93	0.33	1.27	±14.0%
3700	37.7	3.12	6.80	6.68	6.71	0.33	1.27	±14.0%
3900	37.5	3.32	6.83	6.74	6.76	0.35	1.27	±14.0%
4100	37.2	3.53	6.59	6.50	6.52	0.34	1.27	±14.0%
4200	37.1	3.63	6.53	6.46	6.48	0.35	1.27	±14.0%
4400	36.9	3.84	6.31	6.26	6.26	0.35	1.27	±14.0%
4600	36.7	4.04	6.29	6.25	6.26	0.34	1.27	±14.0%
4800	36.4	4.25	6.26	6.23	6.24	0.36	1.27	±14.0%
4950	36.3	4.40	5.86	5.80	5.75	0.43	1.36	±14.0%
5250	35.9	4.71	5.39	5.39	5.39	0.35	1.62	±14.0%
5600	35.5	5.07	4.75	4.77	4.72	0.37	1.75	±14.0%
5800	35.3	5.27	4.88	4.94	4.80	0.36	1.86	±14.0%

<sup>C</sup> Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

<sup>F</sup> The probes are calibrated using tissue simulating liquids (TSL) that deviate for  $\epsilon$  and  $\sigma$  by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7 - 3 GHz and 13.1% for 3 - 6 GHz.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.



## Parameters of Probe: EX3DV4 - SN:7554

### Calibration Parameter Determined in Head Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
6500	34.5	6.07	5.35	5.45	5.29	0.20	2.50	±18.6%

<sup>C</sup> Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> The probes are calibrated using tissue simulating liquids (TSL) that deviate for  $\epsilon$  and  $\sigma$  by less than ±10% from the target values (typically better than ±6%) and are valid for TSL with deviations of up to ±10%.



<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3–6 GHz; and below ±4% for frequencies between 6–10 GHz at any distance larger than half the probe tip diameter from the boundary.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide:R22)

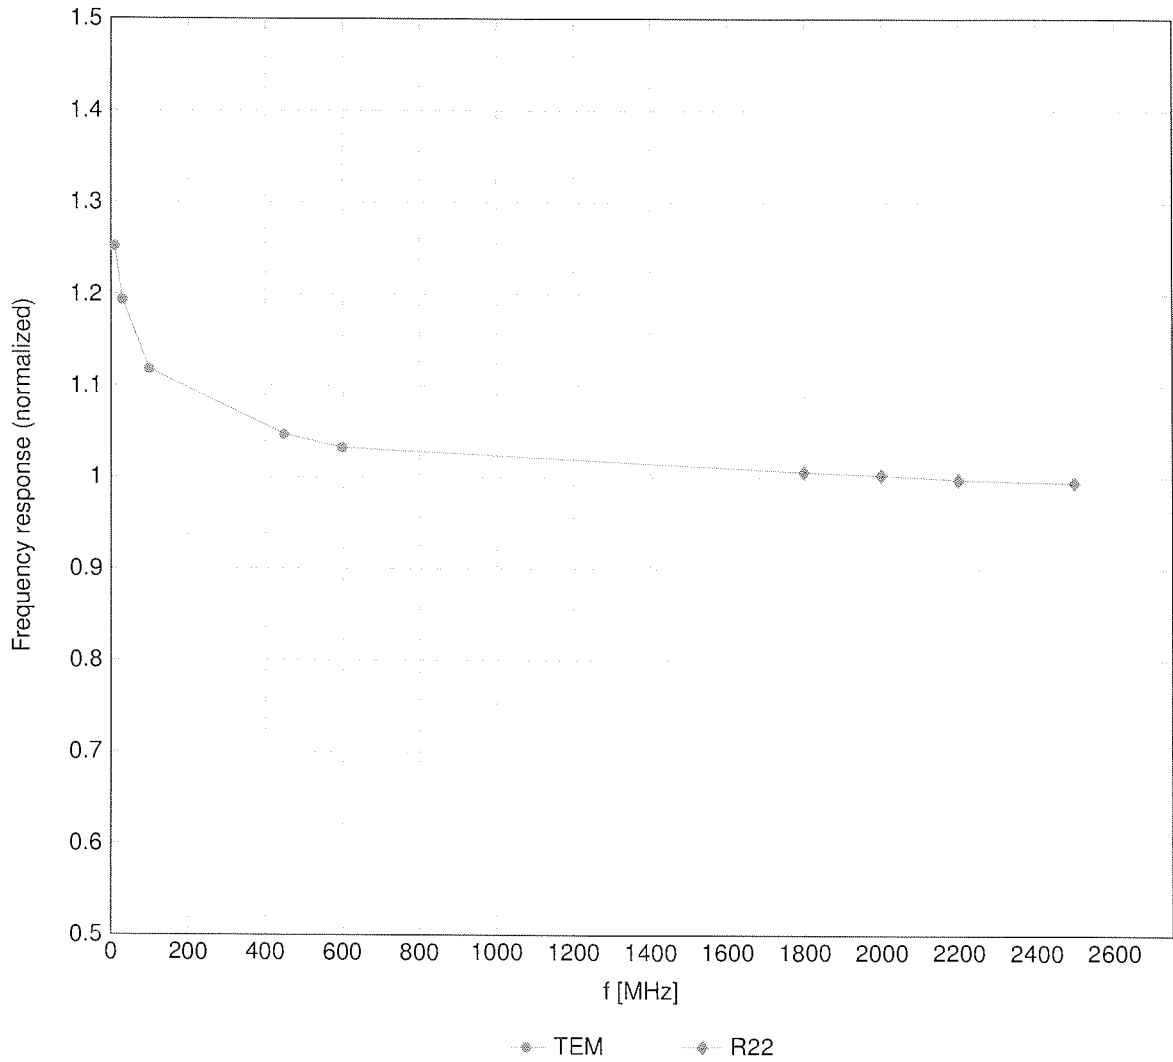

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)



### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

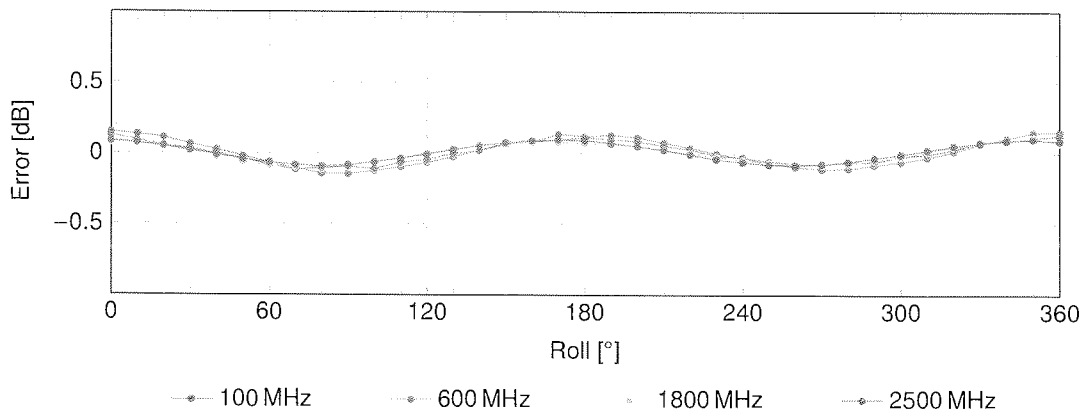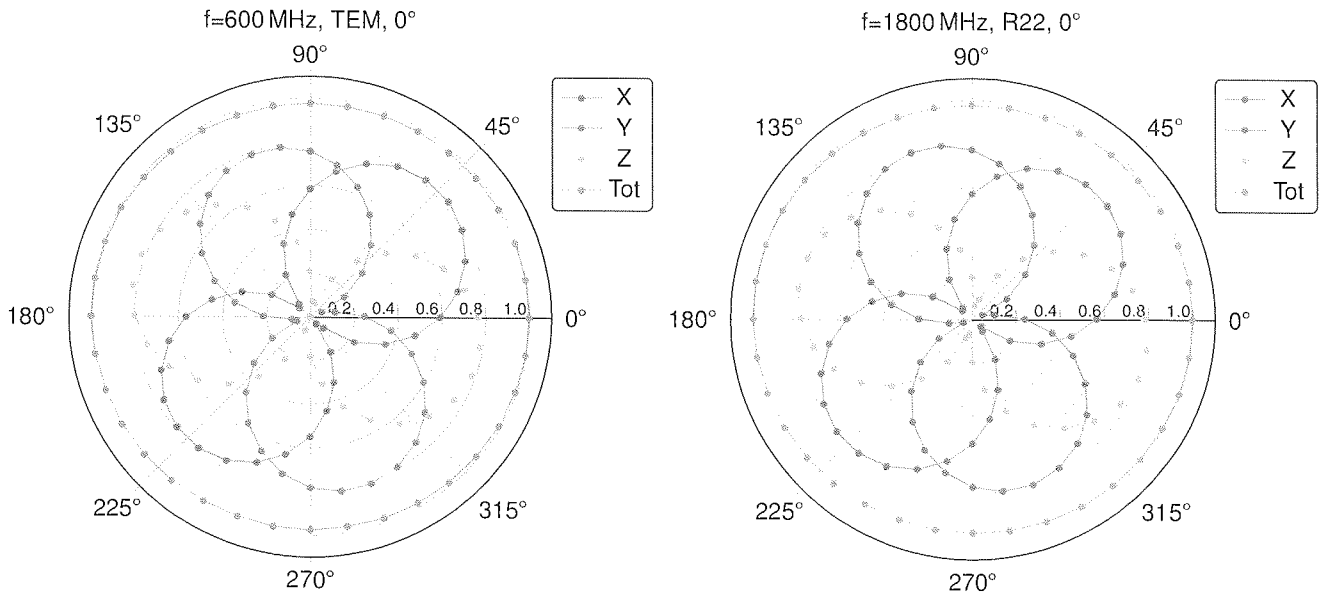

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


### Dynamic Range $f(\text{SAR}_{\text{head}})$

(TEM cell,  $f_{\text{eval}} = 1900\text{MHz}$ )

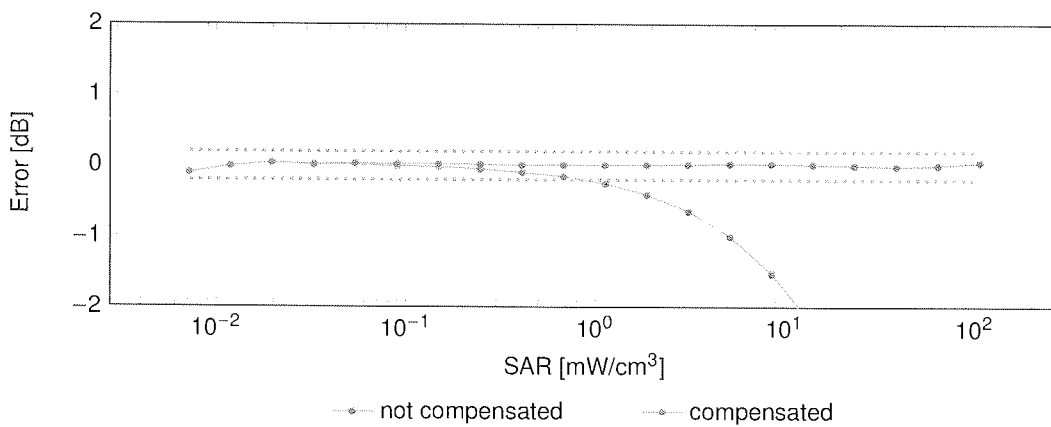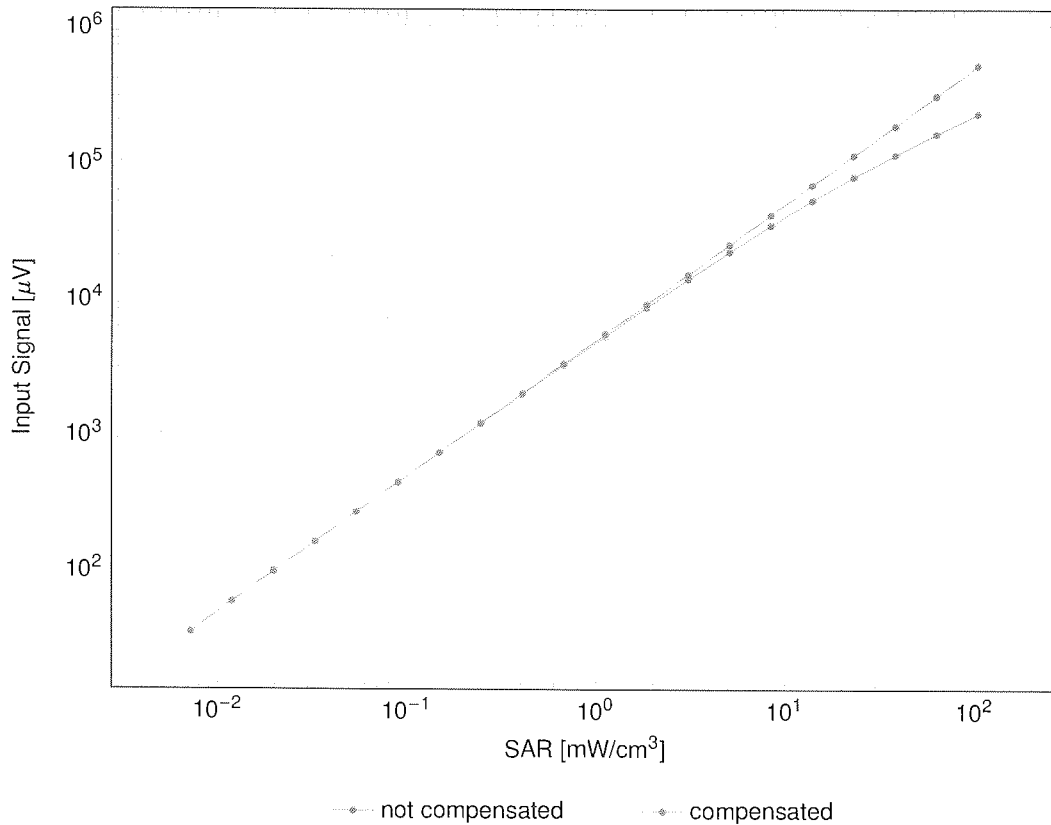


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

### Conversion Factor Assessment

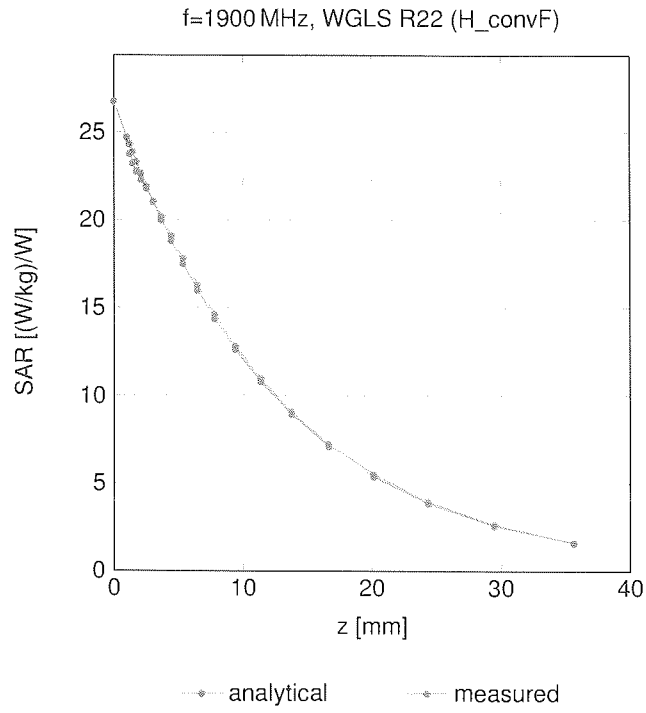

### Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

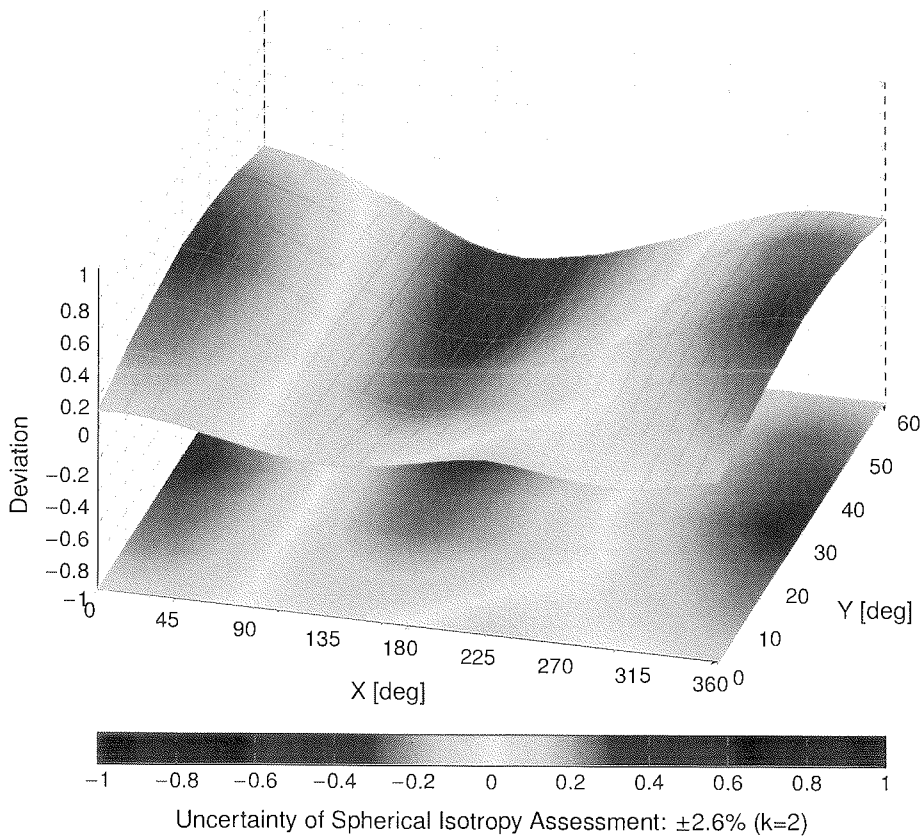

## Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k = 2$
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10222	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Roll-off 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	AAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10307	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	±9.6
10308	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	±9.6
10310	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	±9.6
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	iDEN 1:3	iDEN	10.51	±9.6
10314	AAA	iDEN 1:6	iDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	±9.6
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAD	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAE	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
10402	AAE	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10417	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	±9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAC	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±9.6
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±9.6
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10467	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	±9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±9.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10519	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10520	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	±9.6
10521	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10522	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	±9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	±9.6
10526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±9.6
10527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±9.6
10528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.36	±9.6
10529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	±9.6
10531	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.43	±9.6
10532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10533	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	±9.6
10534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±9.6
10535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	±9.6
10536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	±9.6
10537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
10538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	±9.6
10540	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k = 2$
10541	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
10554	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	±9.6
10555	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.6
10557	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
10558	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.6
10560	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	±9.6
10561	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
10562	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	±9.6
10563	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.77	±9.6
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9.6
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10585	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10590	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10592	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10593	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	±9.6
10594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10595	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9.6
10597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.6
10598	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±9.6
10599	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.6
10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10601	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8.94	±9.6
10603	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.76	±9.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±9.6
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	±9.6
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±9.6
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	±9.6
10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	±9.6
10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	±9.6
10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±9.6
10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±9.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±9.6
10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
10626	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±9.6
10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10630	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	±9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	±9.6
10632	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10633	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	±9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±9.6
10635	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
10636	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10637	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10638	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±9.6
10639	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10640	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	±9.6
10641	AAD	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10642	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±9.6
10643	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±9.6
10644	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	±9.6
10645	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±9.6
10646	AAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±9.6
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10652	AAF	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	±9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±9.6
10654	AAE	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6
10658	AAB	Pulse Waveform (200Hz, 10%)	Test	10.00	±9.6
10659	AAB	Pulse Waveform (200Hz, 20%)	Test	6.99	±9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.98	±9.6
10661	AAB	Pulse Waveform (200Hz, 60%)	Test	2.22	±9.6
10662	AAB	Pulse Waveform (200Hz, 80%)	Test	0.97	±9.6
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	±9.6
10671	AAC	IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.09	±9.6
10672	AAC	IEEE 802.11ax (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.57	±9.6
10673	AAC	IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±9.6
10674	AAC	IEEE 802.11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10675	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	±9.6
10676	AAC	IEEE 802.11ax (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10677	AAC	IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±9.6
10678	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±9.6
10679	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±9.6
10680	AAC	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
10681	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	±9.6
10682	AAC	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	±9.6
10683	AAC	IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
10688	AAC	IEEE 802.11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
10689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	±9.6
10698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.6
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±9.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	±9.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9.00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.64	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.58	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.51	±9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10774	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±9.6
10783	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10784	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	±9.6
10828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9.6
10869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.6
10892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAB	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10900	AAB	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAB	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10905	AAB	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAB	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAB	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAB	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAC	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10937	AAC	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10940	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAC	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	8.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDRp4	ULLA	3.19	±9.6
10982	AAA	ULLA HDRp8	ULLA	3.43	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> <i>k</i> = 2
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±9.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	±9.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.70	±9.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	±9.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	±9.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	±9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	±9.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	±9.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
11014	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11015	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±9.6
11017	AAA	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	±9.6
11018	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±9.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±9.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±9.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±9.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±9.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	±9.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.6
11026	AAA	IEEE 802.11be (320 MHz, MCS0, 99pc duty cycle)	WLAN	8.39	±9.6

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

**Accreditation No.: SCS 0108**

**Client** **B.V. ADT**  
 Taoyuan City

**Certificate No.** **EUmm-9615\_Jul23**

**CALIBRATION CERTIFICATE**

**Object** EUmmWV4 - SN:9615

**Calibration procedure(s)** QA CAL-02.v9, QA CAL-25.v8, QA CAL-42.v3  
 Calibration procedure for E-field probes optimized for close near field evaluations in air

**Calibration date** July 10, 2023

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power sensor NRP110T	SN: 101244	12-Apr-23 (No. 0001A300692178)	Apr-24
Spectrum analyzer FSV40	SN: 101832	23-Jan-23 (No. 4030-315005314)	Jan-24
Ref. Probe EUmmWV3	SN: 9374	22-May-23 (No. EUmm-9374_May23)	May-24
DAE4ip	SN: 1662	13-Feb-23 (No. DAE4ip-1662_Feb23)	Feb-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Generator APSIN26G	SN: 669	28-Mar-17 (in house check May-23)	In house check: May-24
Generator Agilent E8251A	SN: US41140111	28-Mar-17 (in house check May-23)	In house check: May-24

	Name	Function	Signature
Calibrated by	Leif Klynsner	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: July 17, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
**The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

## Glossary

NORM <sub>x,y</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system
Sensor Angles	sensor deviation from the probe axis, used to calculate the field orientation and polarization
$\vec{k}$	is the wave propagation direction

## Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). For frequencies  $> 6$  GHz, the far field in front of waveguide horn antennas is measured for a set of frequencies in various waveguide bands up to 110 GHz.
- DCP<sub>x,y</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.  
Note: As the field is measured with a diode detector sensor, it is warranted that the probe response is linear ( $E^2$ ) below the documented lowest calibrated value.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- The frequency sensor model parameters are determined prior to calibration based on a frequency sweep (sensor model involving resistors R, R<sub>p</sub>, inductance L and capacitors C, C<sub>p</sub>).
- A<sub>x,y</sub>; B<sub>x,y</sub>; C<sub>x,y</sub>; D<sub>x,y</sub>; VR<sub>x,y</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the **NORM<sub>x</sub>** (no uncertainty required).
- Equivalent Sensor Angle**: The two probe sensors are mounted in the same plane at different angles. The angles are assessed using the information gained by determining the **NORM<sub>x</sub>** (no uncertainty required).
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide / horn setup.

### Parameters of Probe: EUmmWV4 - SN:9615

#### Basic Calibration Parameters

	Sensor X	Sensor Y	Unc (k = 2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ )	0.01878	0.02036	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	107.0	105.0	$\pm 4.7\%$
Equivalent Sensor Angle	-60.6	36.0	

#### Calibration Results for Frequency Response (750 MHz – 110 GHz)

Frequency GHz	Target E-Field V/m	Deviation Sensor X dB	Deviation Sensor Y dB	Unc (k = 2) dB
0.75	77.2	-0.29	-0.06	$\pm 0.43$
1.8	140.4	-0.03	-0.00	$\pm 0.43$
2.0	133.0	0.13	0.17	$\pm 0.43$
2.2	124.8	-0.08	-0.06	$\pm 0.43$
2.5	123.0	0.09	0.11	$\pm 0.43$
3.5	256.2	-0.13	-0.22	$\pm 0.43$
3.7	249.8	0.03	-0.09	$\pm 0.43$
6.6	74.7	-0.13	-0.21	$\pm 0.98$
8.0	67.2	-0.10	-0.04	$\pm 0.98$
10.0	66.2	-0.00	0.02	$\pm 0.98$
15.0	51.2	0.06	0.16	$\pm 0.98$
26.6	112.6	0.23	0.13	$\pm 0.98$
30.0	121.9	0.01	0.00	$\pm 0.98$
35.0	121.3	-0.14	-0.09	$\pm 0.98$
40.0	102.3	-0.26	-0.17	$\pm 0.98$
50.0	61.5	0.02	-0.00	$\pm 0.98$
55.0	75.9	0.00	-0.05	$\pm 0.98$
60.0	80.5	0.00	0.02	$\pm 0.98$
65.0	77.1	0.09	0.14	$\pm 0.98$
70.0	74.3	0.08	0.06	$\pm 0.98$
75.0	74.8	-0.03	-0.08	$\pm 0.98$
75.0	96.6	-0.02	-0.07	$\pm 0.98$
80.0	95.4	-0.10	-0.11	$\pm 0.98$
85.0	58.0	-0.04	-0.04	$\pm 0.98$
90.0	84.0	0.01	0.02	$\pm 0.98$
92.0	83.9	0.00	0.00	$\pm 0.98$
95.0	76.2	-0.03	-0.06	$\pm 0.98$
97.0	69.1	0.00	-0.03	$\pm 0.98$
100.0	66.9	0.09	0.11	$\pm 0.98$
105.0	67.2	-0.21	-0.16	$\pm 0.98$
110.0	78.1	0.13	0.07	$\pm 0.98$

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Linearization parameter uncertainty for maximum specified field strength.

### Parameters of Probe: EUmmWV4 - SN:9615

#### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> k = 2
0	CW	X	0.00	0.00	1.00	0.00	127.1	±3.3%	±4.7%
		Y	0.00	0.00	1.00		65.0		
10352	Pulse Waveform (200Hz, 10%)	X	3.24	60.00	14.50	10.00	6.0	±1.5%	±9.6%
		Y	2.57	60.00	15.80		6.0		
10353	Pulse Waveform (200Hz, 20%)	X	2.26	60.00	13.26	6.99	12.0	±1.1%	±9.6%
		Y	1.77	60.00	14.78		12.0		
10354	Pulse Waveform (200Hz, 40%)	X	1.35	60.00	11.91	3.98	23.0	±1.6%	±9.6%
		Y	1.08	60.00	13.55		23.0		
10355	Pulse Waveform (200Hz, 60%)	X	0.80	60.00	11.12	2.22	27.0	±1.2%	±9.6%
		Y	0.73	60.00	12.47		27.0		
10387	QPSK Waveform, 1 MHz	X	1.25	60.00	12.01	1.00	22.0	±1.4%	±9.6%
		Y	1.30	60.00	12.02		22.0		
10388	QPSK Waveform, 10 MHz	X	1.31	60.00	11.68	0.00	22.0	±0.9%	±9.6%
		Y	1.45	60.00	11.76		22.0		
10396	64-QAM Waveform, 100 kHz	X	3.06	64.10	15.34	3.01	17.0	±0.7%	±9.6%
		Y	20.00	85.35	22.03		17.0		
10399	64-QAM Waveform, 40 MHz	X	2.12	60.00	12.24	0.00	19.0	±1.0%	±9.6%
		Y	2.20	60.00	12.38		19.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.30	60.00	12.69	0.00	12.0	±0.9%	±9.6%
		Y	3.30	60.00	12.85		12.0		

Note: For details on UID parameters see Appendix

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## Parameters of Probe: EUmmWV4 - SN:9615

### Calibration Results for Linearity Response

Frequency GHz	Target E-Field V/m	Deviation Sensor X dB	Deviation Sensor Y dB	Unc (k = 2) dB
0.9	50.0	0.08	0.12	±0.2
0.9	100.0	-0.09	-0.01	±0.2
0.9	500.0	0.01	-0.02	±0.2
0.9	1000.0	0.04	-0.00	±0.2
0.9	1500.0	0.02	-0.00	±0.2
0.9	2100.0	-0.01	0.00	±0.2

### Sensor Frequency Model Parameters (750 MHz – 55 GHz)

	Sensor X	Sensor Y
R (Ω)	74.80	116.49
R <sub>p</sub> (Ω)	106.73	170.46
L (nH)	0.07481	0.10456
C (pF)	0.2011	0.1765
C <sub>p</sub> (pF)	0.0744	0.0515

### Sensor Frequency Model Parameters (55 GHz – 110 GHz)

	Sensor X	Sensor Y
R (Ω)	34.51	32.85
R <sub>p</sub> (Ω)	137.22	134.17
L (nH)	0.06971	0.06726
C (pF)	0.0700	0.0751
C <sub>p</sub> (pF)	0.0758	0.0795

### Sensor Model Parameters


	C1 fF	C2 fF	α V <sup>-1</sup>	T1 msV <sup>-2</sup>	T2 msV <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
x	58.9	425.18	33.30	0.92	8.47	4.98	0.00	1.82	1.01
y	51.0	364.49	32.87	0.92	7.53	5.03	2.00	2.00	1.01

### Other Probe Parameters



Sensor Arrangement	Rectangular
Connector Angle	54.8°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	320 mm
Probe Body Diameter	8 mm
Tip Length	23 mm
Tip Diameter	8.0 mm
Probe Tip to Sensor X Calibration Point	1.5 mm
Probe Tip to Sensor Y Calibration Point	1.5 mm

### Deviation from Isotropy in Air

30GHz: 3D isotropy, E-field parallel to probe axis

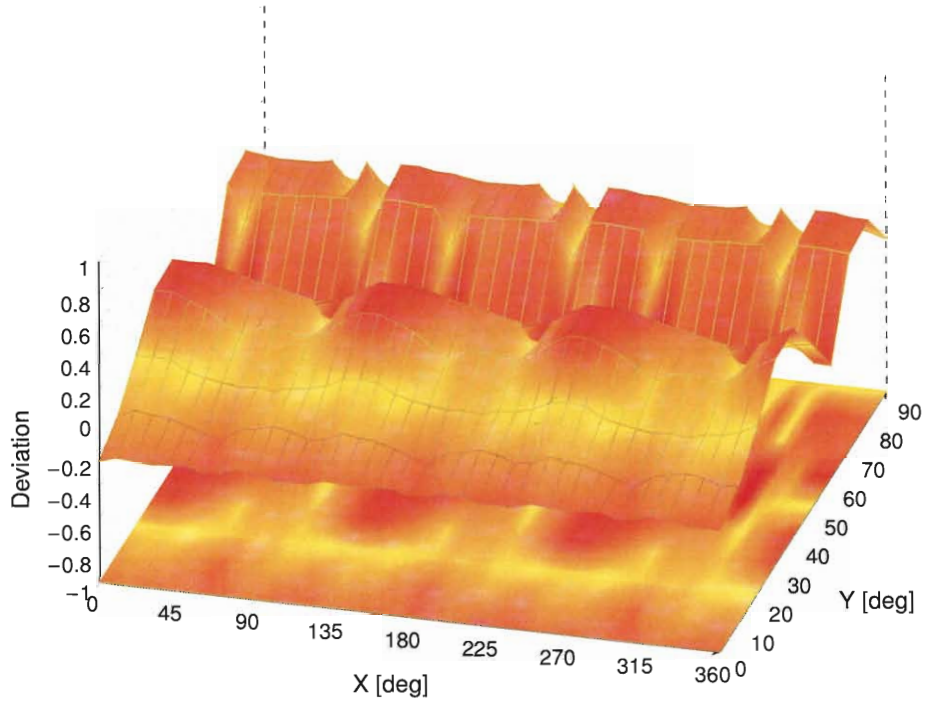

60GHz: 3D isotropy, E-field parallel to probe axis

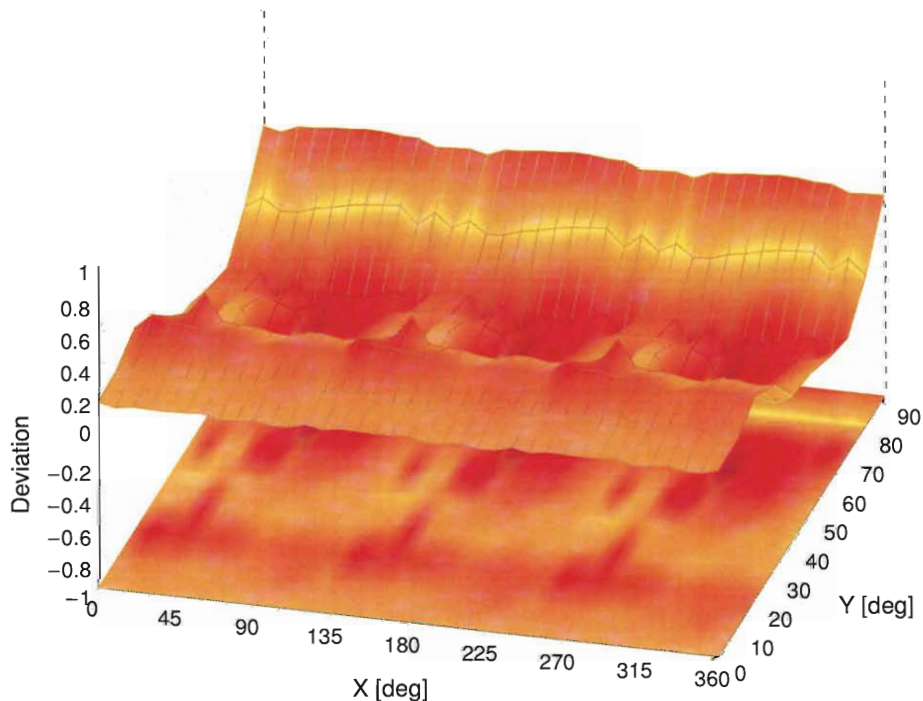

Probe isotropy for  $E_{tot}$ : probe rotated  $\phi = 0^\circ$  to  $360^\circ$ , tilted from field propagation direction  $\vec{k}$   
Parallel to the field propagation ( $\psi = 0^\circ - 90^\circ$ ) at 30 GHz: deviation within  $\pm 0.36$  dB  
Parallel to the field propagation ( $\psi = 0^\circ - 90^\circ$ ) at 60 GHz: deviation within  $\pm 0.45$  dB



### Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10222	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6
10278	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.5)	PHS	11.81	±9.6
10279	CAA	PHS (QPSK, BW 884 MHz, Rolloff 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTRL symbols)	WiMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	AAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WiMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WiMAX	14.67	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10307	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WiMAX	14.49	±9.6
10308	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WiMAX	14.58	±9.6
10310	AAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WiMAX	14.57	±9.6
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAA	iDEN 1:3	iDEN	10.51	±9.6
10314	AAA	iDEN 1:6	iDEN	13.48	±9.6
10315	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	WLAN	1.71	±9.6
10316	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10317	AAD	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAE	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.37	±9.6
10401	AAE	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.60	±9.6
10402	AAE	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10417	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	WLAN	8.19	±9.6
10422	AAC	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAC	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAC	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAC	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAC	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAC	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAB	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±9.6
10449	AAD	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±9.6
10450	AAD	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAB	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAE	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc duty cycle)	WLAN	8.63	±9.6
10457	AAB	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
10460	AAB	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±9.6
10463	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10465	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10466	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10467	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10468	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10469	AAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.56	±9.6
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10472	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±9.6
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10480	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±9.6
10481	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10482	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±9.6
10483	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±9.6
10484	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±9.6
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	±9.6
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.38	±9.6
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.60	±9.6
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	±9.6
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±9.6
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10497	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10498	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	±9.6
10500	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±9.6
10501	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±9.6
10502	AAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±9.6
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±9.6
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±9.6
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±9.6
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±9.6
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±9.6
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±9.6
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±9.6
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±9.6
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	WLAN	1.57	±9.6
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	WLAN	1.58	±9.6
10518	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.23	±9.6
10519	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.39	±9.6
10520	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.12	±9.6
10521	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	WLAN	7.97	±9.6
10522	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.08	±9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.36	±9.6
10526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.42	±9.6
10527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.21	±9.6
10528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.36	±9.6
10529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.36	±9.6
10531	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.43	±9.6
10532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10533	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.38	±9.6
10534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.45	±9.6
10535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.45	±9.6
10536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.32	±9.6
10537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
10538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.54	±9.6
10540	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.39	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10541	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.46	±9.6
10542	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±9.6
10554	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.48	±9.6
10555	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
10556	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.50	±9.6
10557	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.52	±9.6
10558	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.61	±9.6
10560	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.73	±9.6
10561	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.56	±9.6
10562	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.69	±9.6
10563	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.77	±9.6
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	WLAN	8.25	±9.6
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	WLAN	8.45	±9.6
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	WLAN	8.13	±9.6
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	WLAN	8.00	±9.6
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	WLAN	8.37	±9.6
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	WLAN	8.10	±9.6
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	WLAN	8.30	±9.6
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.99	±9.6
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.98	±9.6
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10583	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.59	±9.6
10584	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.60	±9.6
10585	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.70	±9.6
10586	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.49	±9.6
10587	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	8.36	±9.6
10588	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.76	±9.6
10589	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.35	±9.6
10590	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.67	±9.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	8.63	±9.6
10592	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10593	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	8.64	±9.6
10594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10595	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	8.74	±9.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	8.71	±9.6
10597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	8.72	±9.6
10598	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	8.50	±9.6
10599	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±9.6
10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10601	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	8.82	±9.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	8.94	±9.6
10603	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	9.03	±9.6
10604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	8.76	±9.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	8.97	±9.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.77	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.57	±9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±9.6
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.94	±9.6
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.59	±9.6
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.82	±9.6
10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	±9.6
10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.58	±9.6
10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±9.6
10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±9.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.82	±9.6
10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±9.6
10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±9.6
10626	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.88	±9.6
10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.71	±9.6
10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10630	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.72	±9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.81	±9.6
10632	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10633	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.83	±9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.80	±9.6
10635	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6
10636	AAD	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.83	±9.6
10637	AAD	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc duty cycle)	WLAN	8.79	±9.6
10638	AAD	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.86	±9.6
10639	AAD	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc duty cycle)	WLAN	8.85	±9.6
10640	AAD	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc duty cycle)	WLAN	8.98	±9.6
10641	AAD	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc duty cycle)	WLAN	9.06	±9.6
10642	AAD	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc duty cycle)	WLAN	9.06	±9.6
10643	AAD	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.89	±9.6
10644	AAD	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc duty cycle)	WLAN	9.05	±9.6
10645	AAD	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±9.6
10646	AAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±9.6
10647	AAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±9.6
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10652	AAF	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	±9.6
10653	AAF	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±9.6
10654	AAE	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAF	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6
10658	AAB	Pulse Waveform (200Hz, 10%)	Test	10.00	±9.6
10659	AAB	Pulse Waveform (200Hz, 20%)	Test	6.99	±9.6
10660	AAB	Pulse Waveform (200Hz, 40%)	Test	3.98	±9.6
10661	AAB	Pulse Waveform (200Hz, 60%)	Test	2.22	±9.6
10662	AAB	Pulse Waveform (200Hz, 80%)	Test	0.97	±9.6
10670	AAA	Bluetooth Low Energy	Bluetooth	2.19	±9.6
10671	AAC	IEEE 802.11ax (20 MHz, MCS0, 90pc duty cycle)	WLAN	9.09	±9.6
10672	AAC	IEEE 802.11ax (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.57	±9.6
10673	AAC	IEEE 802.11ax (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.78	±9.6
10674	AAC	IEEE 802.11ax (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.74	±9.6
10675	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.90	±9.6
10676	AAC	IEEE 802.11ax (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±9.6
10677	AAC	IEEE 802.11ax (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.73	±9.6
10678	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.78	±9.6
10679	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±9.6
10680	AAC	IEEE 802.11ax (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±9.6
10681	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.62	±9.6
10682	AAC	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.83	±9.6
10683	AAC	IEEE 802.11ax (20 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc duty cycle)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc duty cycle)	WLAN	8.28	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 99pc duty cycle)	WLAN	8.45	±9.6
10688	AAC	IEEE 802.11ax (20 MHz, MCS5, 99pc duty cycle)	WLAN	8.29	±9.6
10689	AAC	IEEE 802.11ax (20 MHz, MCS6, 99pc duty cycle)	WLAN	8.55	±9.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 99pc duty cycle)	WLAN	8.25	±9.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS9, 99pc duty cycle)	WLAN	8.29	±9.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 99pc duty cycle)	WLAN	8.25	±9.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 99pc duty cycle)	WLAN	8.57	±9.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.78	±9.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±9.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.61	±9.6
10698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±9.6
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±9.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.73	±9.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.86	±9.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±9.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±9.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc duty cycle)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc duty cycle)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc duty cycle)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc duty cycle)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc duty cycle)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc duty cycle)	WLAN	8.67	±9.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc duty cycle)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc duty cycle)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc duty cycle)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc duty cycle)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc duty cycle)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc duty cycle)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc duty cycle)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc duty cycle)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc duty cycle)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc duty cycle)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc duty cycle)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc duty cycle)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc duty cycle)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc duty cycle)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc duty cycle)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc duty cycle)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc duty cycle)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc duty cycle)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc duty cycle)	WLAN	9.00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc duty cycle)	WLAN	8.64	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc duty cycle)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc duty cycle)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc duty cycle)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc duty cycle)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc duty cycle)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc duty cycle)	WLAN	8.58	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc duty cycle)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc duty cycle)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc duty cycle)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc duty cycle)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc duty cycle)	WLAN	8.51	±9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10770	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10773	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10774	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10775	AAD	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10776	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAD	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±9.6
10783	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10784	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAE	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	±9.6
10828	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9.6
10869	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10870	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10872	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10873	AAE	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAE	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10875	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10876	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10878	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAE	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAE	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAE	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10889	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.6
10892	AAE	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAB	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10900	AAB	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAB	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAB	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10905	AAB	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10911	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAB	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAB	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAB	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAC	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAC	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAC	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10937	AAC	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10938	AAC	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10940	AAC	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10942	AAC	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAC	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAC	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAC	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAC	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	1.16	±9.6
10979	AAA	ULLA HDR4	ULLA	8.58	±9.6
10980	AAA	ULLA HDR8	ULLA	10.32	±9.6
10981	AAA	ULLA HDRp4	ULLA	3.19	±9.6
10982	AAA	ULLA HDRp8	ULLA	3.43	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±9.6
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	±9.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	±9.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.70	±9.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	±9.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	±9.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	±9.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	±9.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	±9.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	±9.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	±9.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±9.6
11014	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±9.6
11015	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±9.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±9.6
11017	AAA	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	±9.6
11018	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±9.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±9.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±9.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±9.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±9.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±9.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	±9.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±9.6
11026	AAA	IEEE 802.11be (320 MHz, MCS0, 99pc duty cycle)	WLAN	8.39	±9.6

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.