



RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4451	55.14 PK	68.26	-13.12	-46.31	-51.02	4.92	-40.12
2	3820.38	47.28 AV	54	-6.72	-55.63	-56.21	4.92	-47.98
3	#7881.93	54.94 PK	68.26	-13.32	-54.77	-45.75	4.92	-40.32
4	9002.49	44.18 AV	54	-9.82	-59.42	-58.62	4.92	-51.08
5	#14603.82	55.36 PK	68.26	-12.9	-51.58	-45.84	4.92	-39.9
6	18684.4	45.94 AV	54	-8.06	-56.88	-57.66	4.92	-49.32
7	#24032.6	59.04 PK	68.26	-9.22	-47.07	-42.42	4.92	-36.22
8	23875.7	48.76 AV	54	-5.24	-54.72	-54.17	4.92	-46.5
9	#34959.56	51.89 PK	68.26	-16.37	-49.34	-54.95	4.92	-43.37
10	39996.89	42.54 AV	54	-11.46	-60.98	-60.33	4.92	-52.72

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

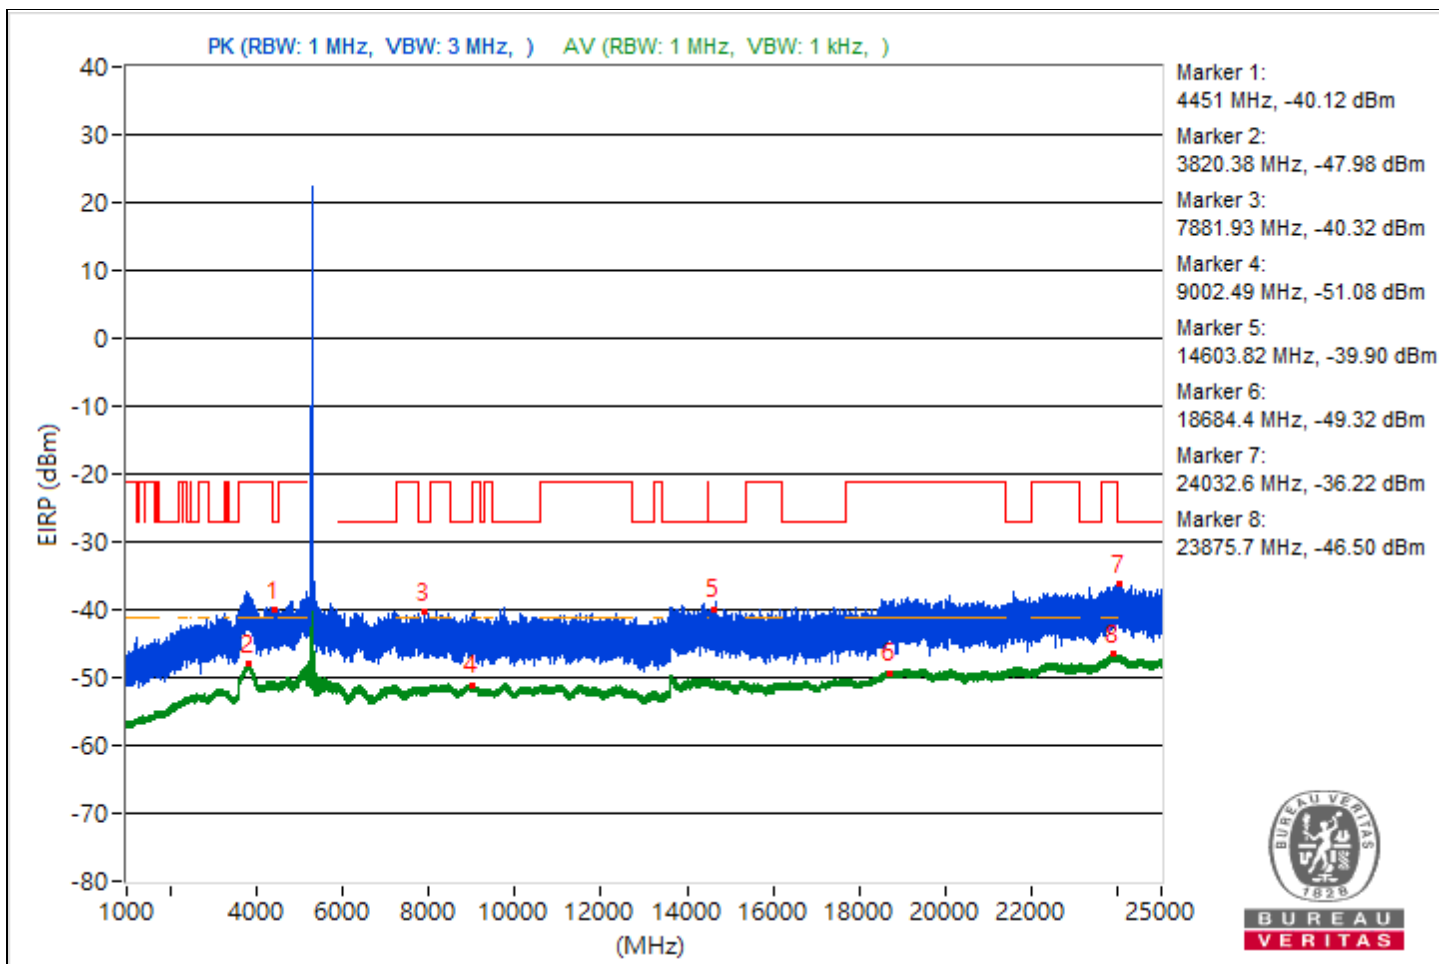

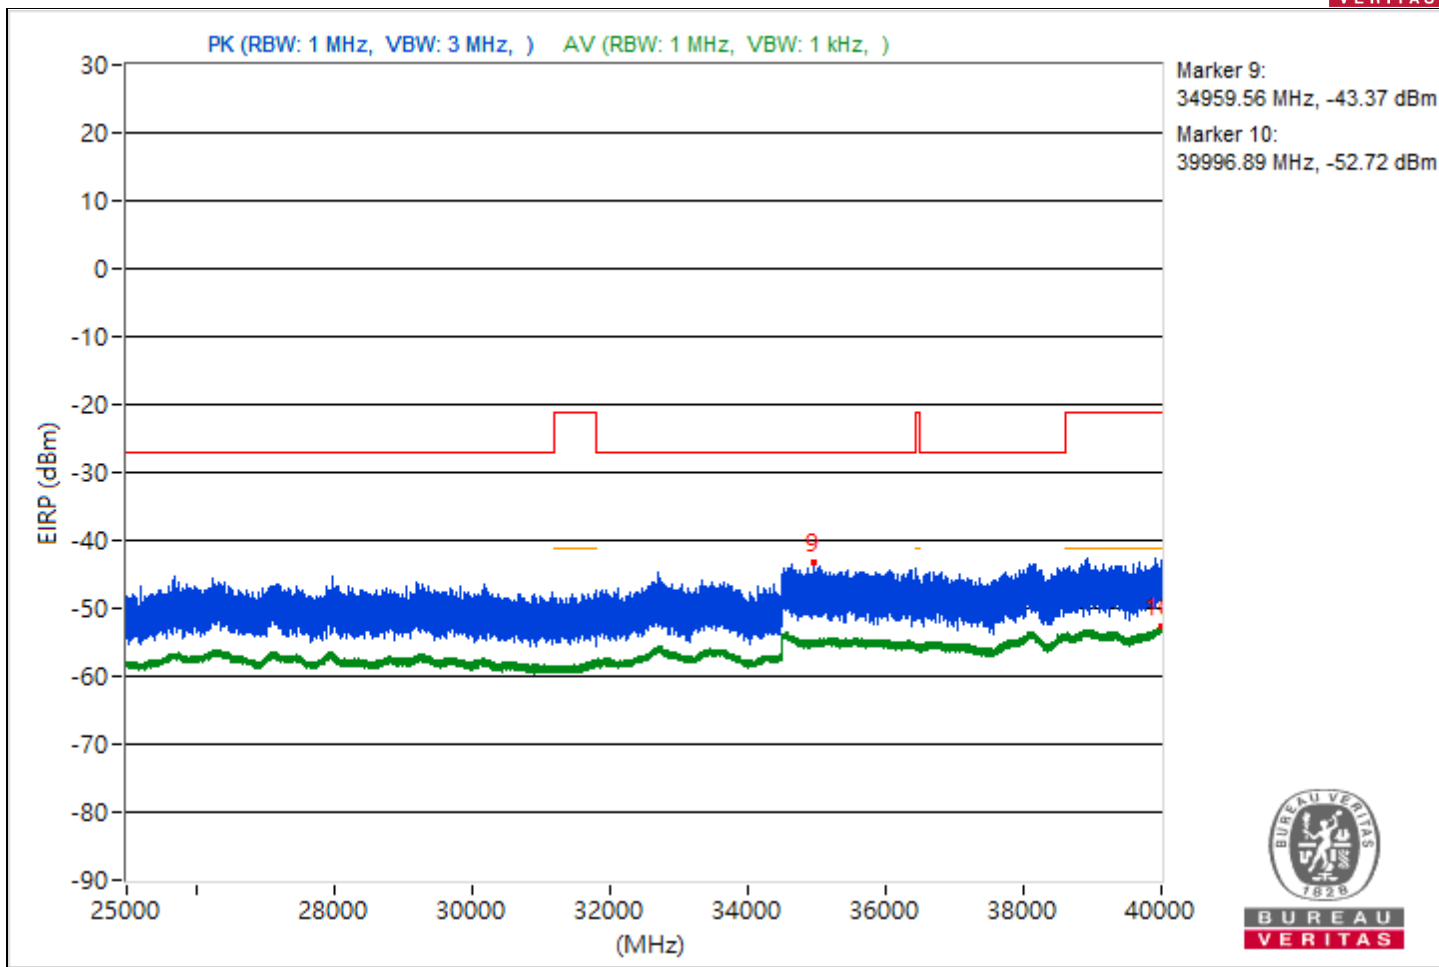



RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3236.19	54.41 PK	68.26	-13.85	-46.72	-52.86	4.92	-40.85
2	3824.11	47.07 AV	54	-6.93	-55.75	-56.53	4.92	-48.19
3	#12821.6	54.88 PK	68.26	-13.38	-46.88	-50.44	4.92	-40.38
4	8350.76	44.22 AV	54	-9.78	-59.24	-58.71	4.92	-51.04
5	#17456.9	55.72 PK	68.26	-12.54	-51.69	-45.37	4.92	-39.54
6	18881.8	46.17 AV	54	-7.83	-56.8	-57.24	4.92	-49.09
7	#24453.6	58.87 PK	68.26	-9.39	-42.35	-48.01	4.92	-36.39
8	23864.4	48.75 AV	54	-5.25	-54.78	-54.12	4.92	-46.51
9	#38545.69	52.42 PK	68.26	-15.84	-49.14	-53.41	4.92	-42.84
10	39990.04	42.46 AV	54	-11.54	-61.16	-60.35	4.92	-52.8

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

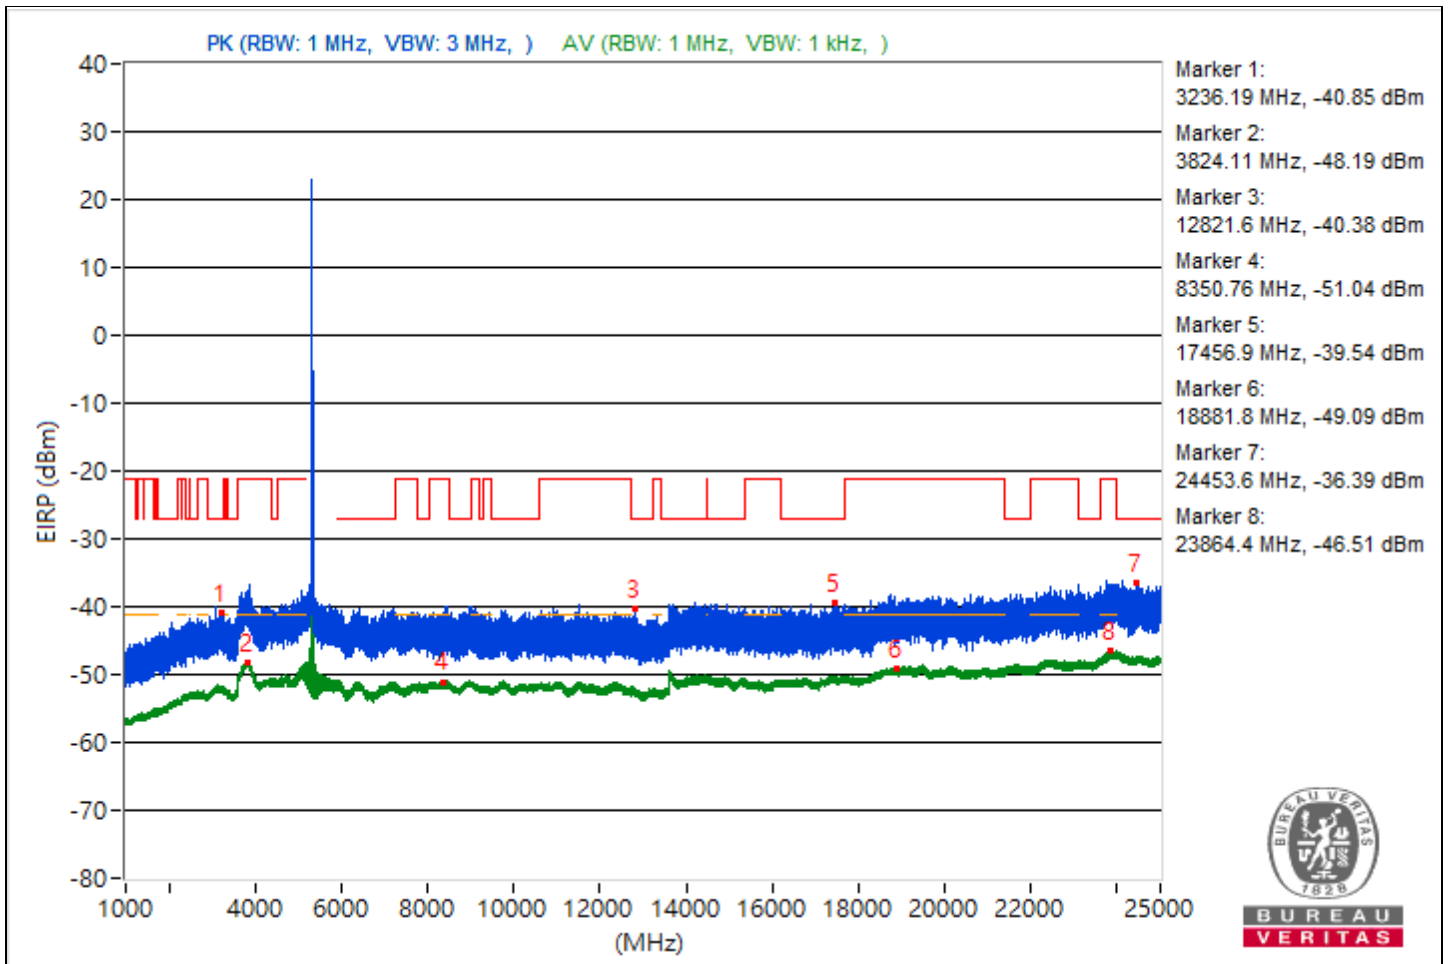

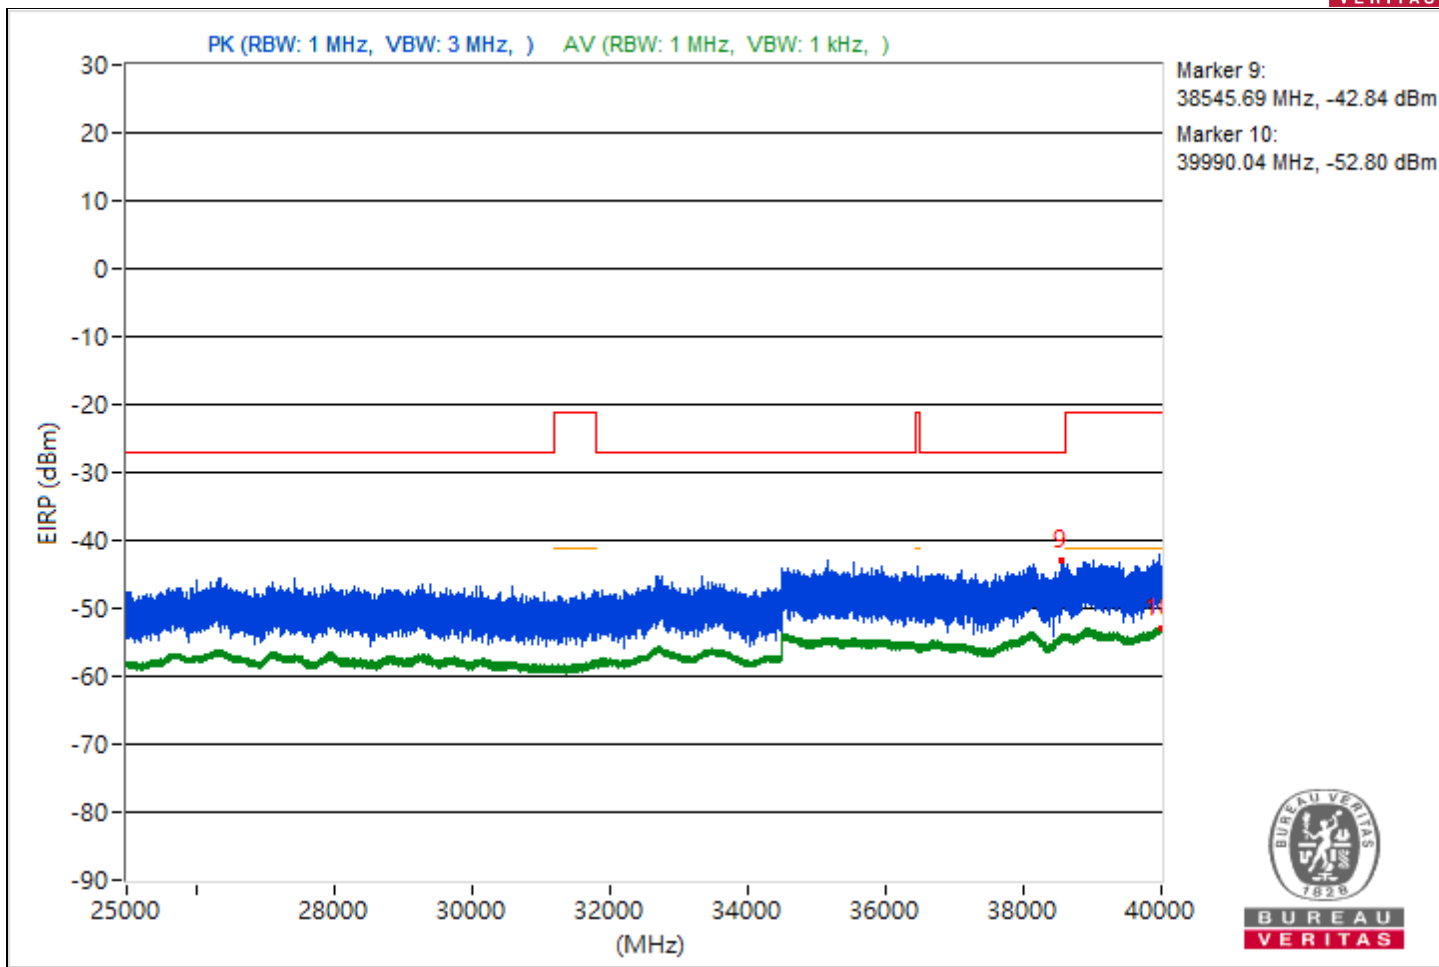



RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3222.03	54.41 PK	68.26	-13.85	-51.09	-47.28	4.92	-40.85
2	3818.04	47.23 AV	54	-6.77	-55.6	-56.36	4.92	-48.03
3	#6427.96	54.98 PK	68.26	-13.28	-52.68	-46.06	4.92	-40.28
4	9015.47	43.98 AV	54	-10.02	-59.71	-58.75	4.92	-51.28
5	#14978.58	55.71 PK	68.26	-12.55	-51.85	-45.34	4.92	-39.55
6	18778.1	46.11 AV	54	-7.89	-57.51	-56.69	4.92	-49.15
7	#24112.9	58.48 PK	68.26	-9.78	-49.59	-42.47	4.92	-36.78
8	23906.5	48.65 AV	54	-5.35	-54.86	-54.24	4.92	-46.61
9	#38149.6	51.69 PK	68.26	-16.57	-57.04	-49.14	4.92	-43.57
10	39995.91	42.46 AV	54	-11.54	-60.38	-61.11	4.92	-52.8

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

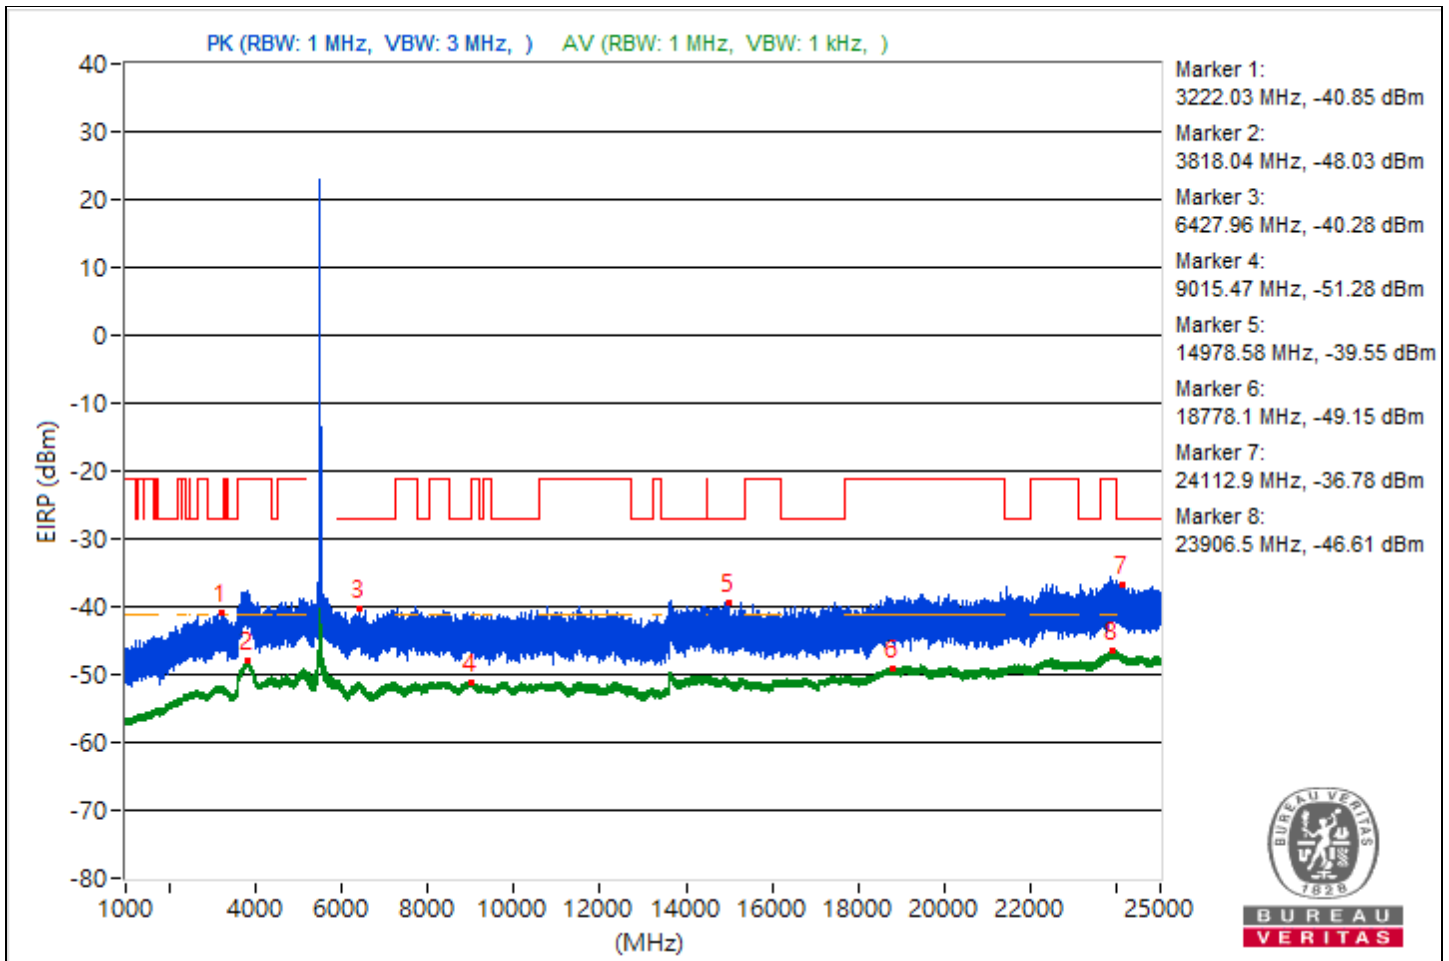

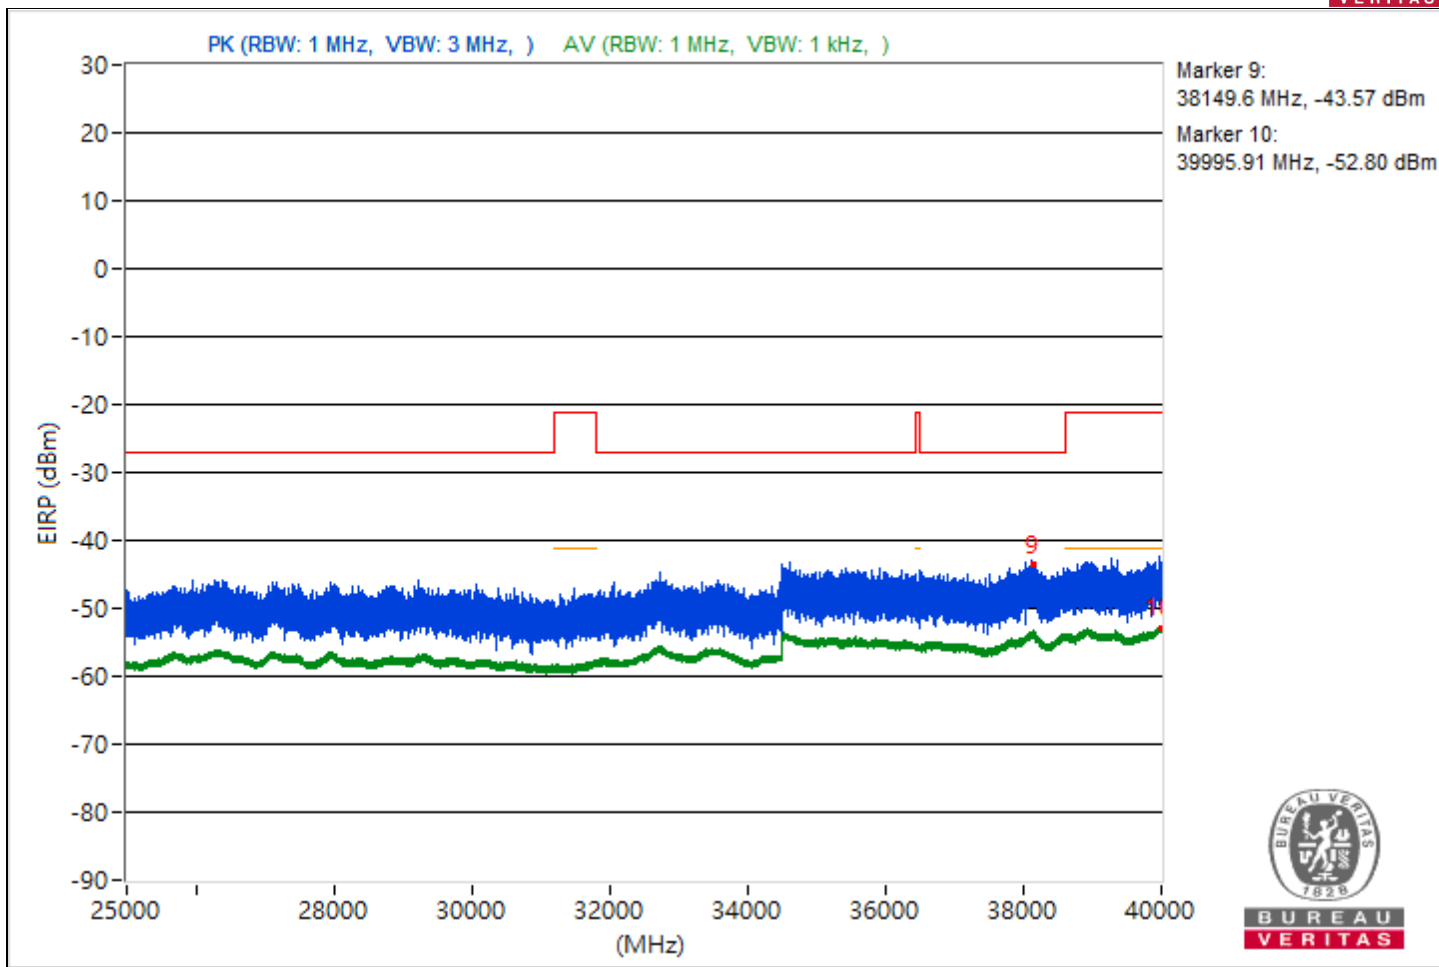



RF Mode	802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4445.94	55.41 PK	68.26	-12.85	-47.7	-47.87	4.92	-39.85
2	3795.88	47.22 AV	54	-6.78	-56.27	-55.69	4.92	-48.04
3	#10267.73	55.01 PK	68.26	-13.25	-50.64	-46.62	4.92	-40.25
4	8420.44	44.22 AV	54	-9.78	-59.45	-58.55	4.92	-51.04
5	#17146.9	56.27 PK	68.26	-11.99	-45.87	-48.3	4.92	-38.99
6	18773.1	46.17 AV	54	-7.83	-57.34	-56.73	4.92	-49.09
7	#24011.8	58.92 PK	68.26	-9.34	-42.54	-47.19	4.92	-36.34
8	23887.9	48.7 AV	54	-5.3	-54.78	-54.22	4.92	-46.56
9	#38210.67	51.69 PK	68.26	-16.57	-49.47	-55.41	4.92	-43.57
10	39998.4	42.68 AV	54	-11.32	-60.43	-60.58	4.92	-52.58

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

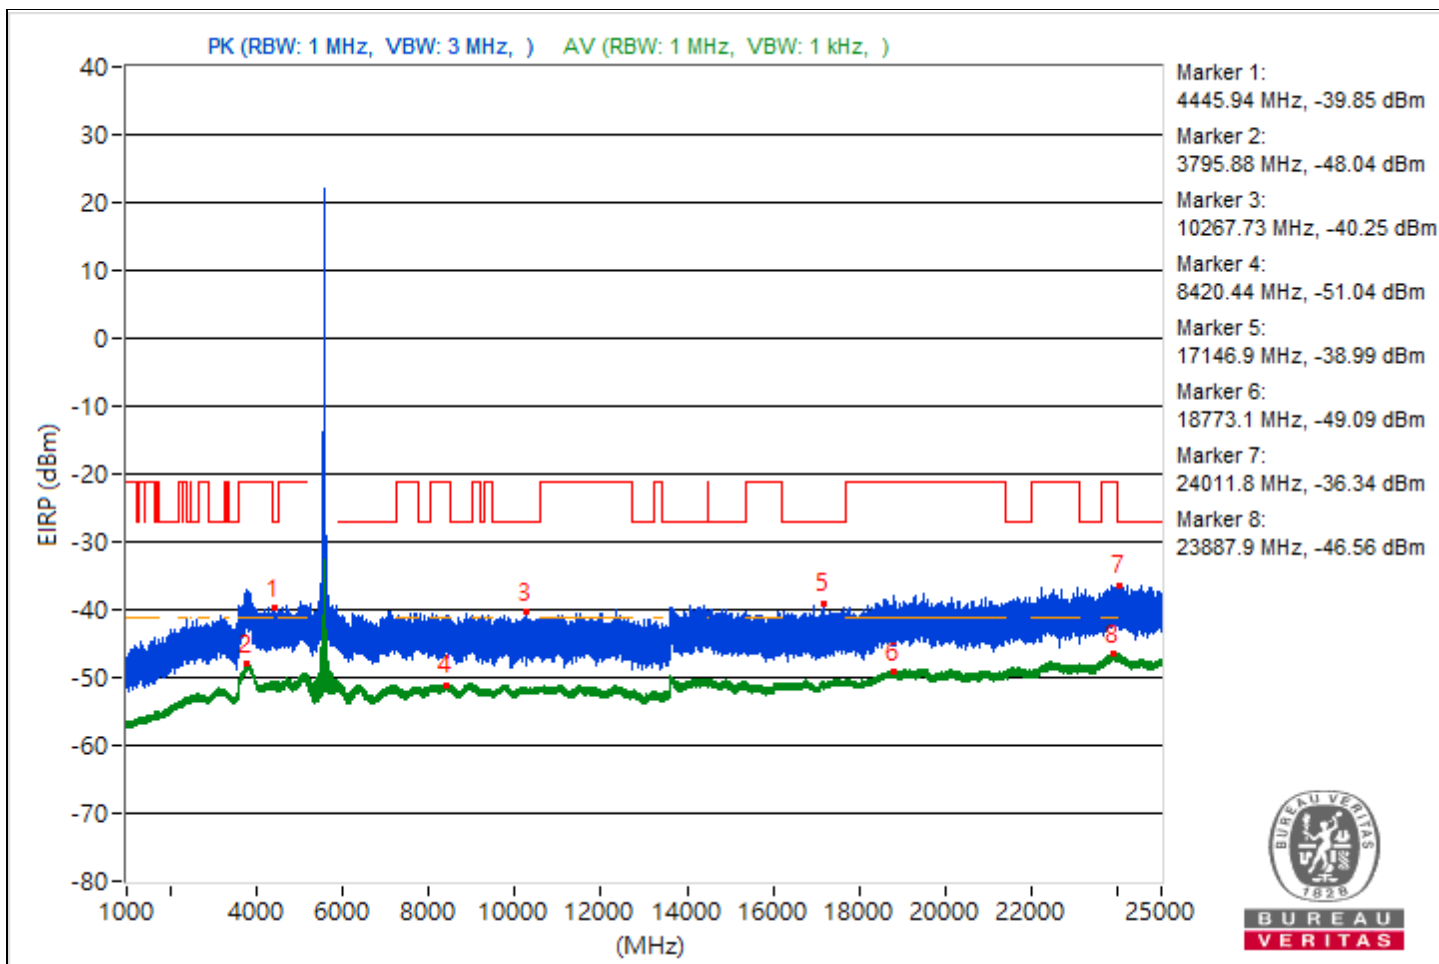

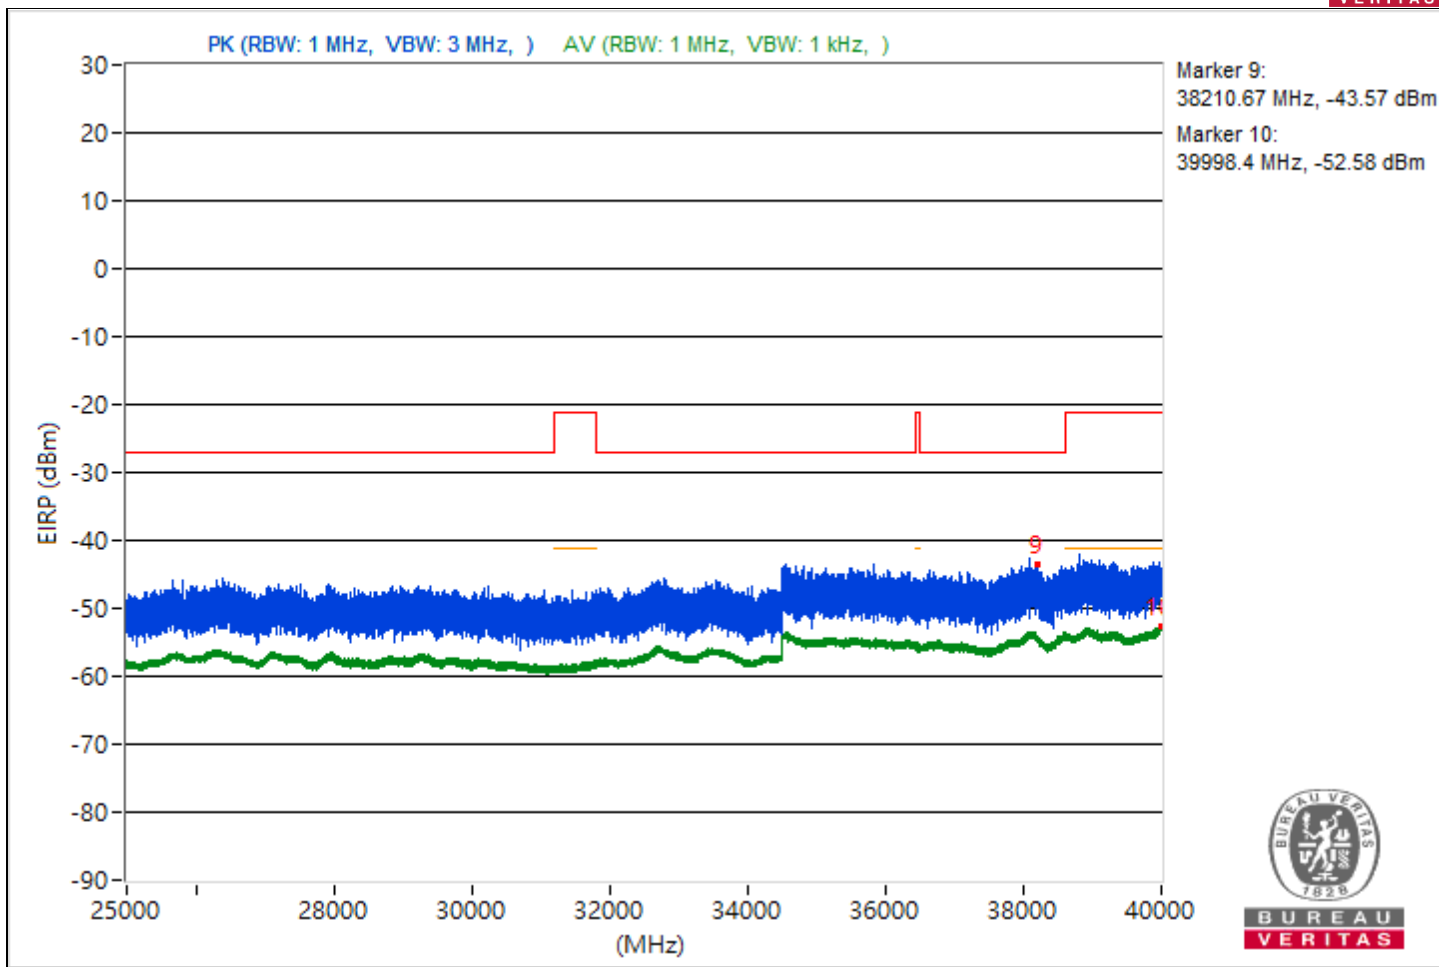





RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4499.22	55.26 PK	68.26	-13	-46.97	-49.16	4.92	-40
2	3810.34	47.09 AV	54	-6.91	-56.59	-55.66	4.92	-48.17
3	#5925.82	55.74 PK	68.26	-12.52	-45.91	-49.87	4.92	-39.52
4	8413.16	44.14 AV	54	-9.86	-59.47	-58.68	4.92	-51.12
5	#14063.56	57.61 PK	68.26	-10.65	-48.45	-43.86	4.92	-37.65
6	18984.4	46.26 AV	54	-7.74	-56.62	-57.28	4.92	-49
7	#24916.4	58.73 PK	68.26	-9.53	-47.55	-42.67	4.92	-36.53
8	23998.1	48.59 AV	54	-5.41	-54.26	-54.98	4.92	-46.67
9	#38193.96	52.09 PK	68.26	-16.17	-55.36	-48.99	4.92	-43.17
10	39999.38	42.76 AV	54	-11.24	-60.54	-60.33	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

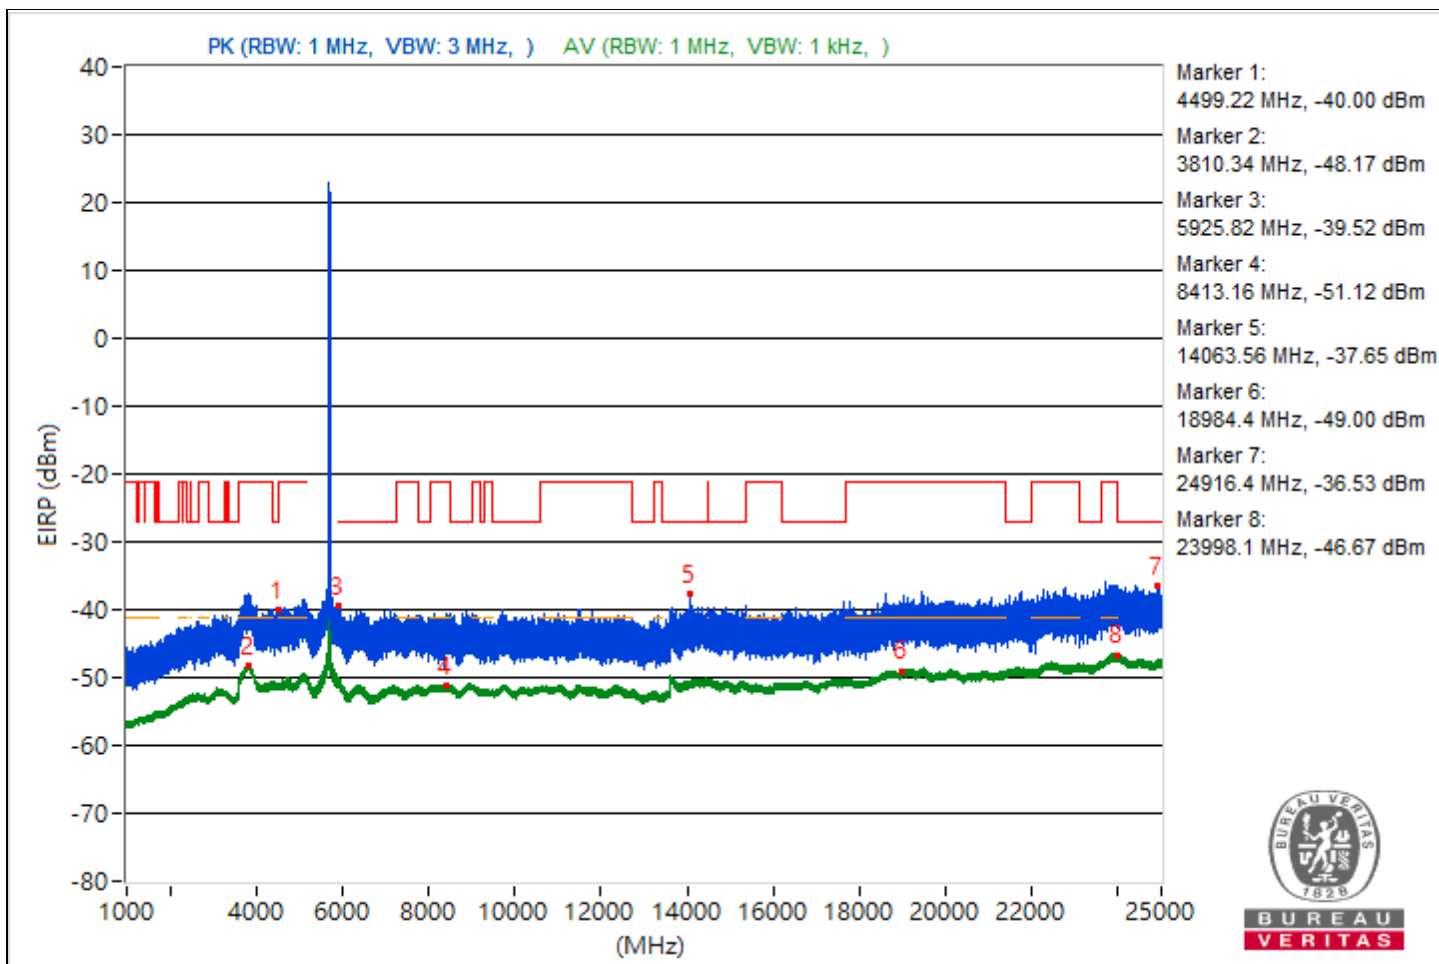

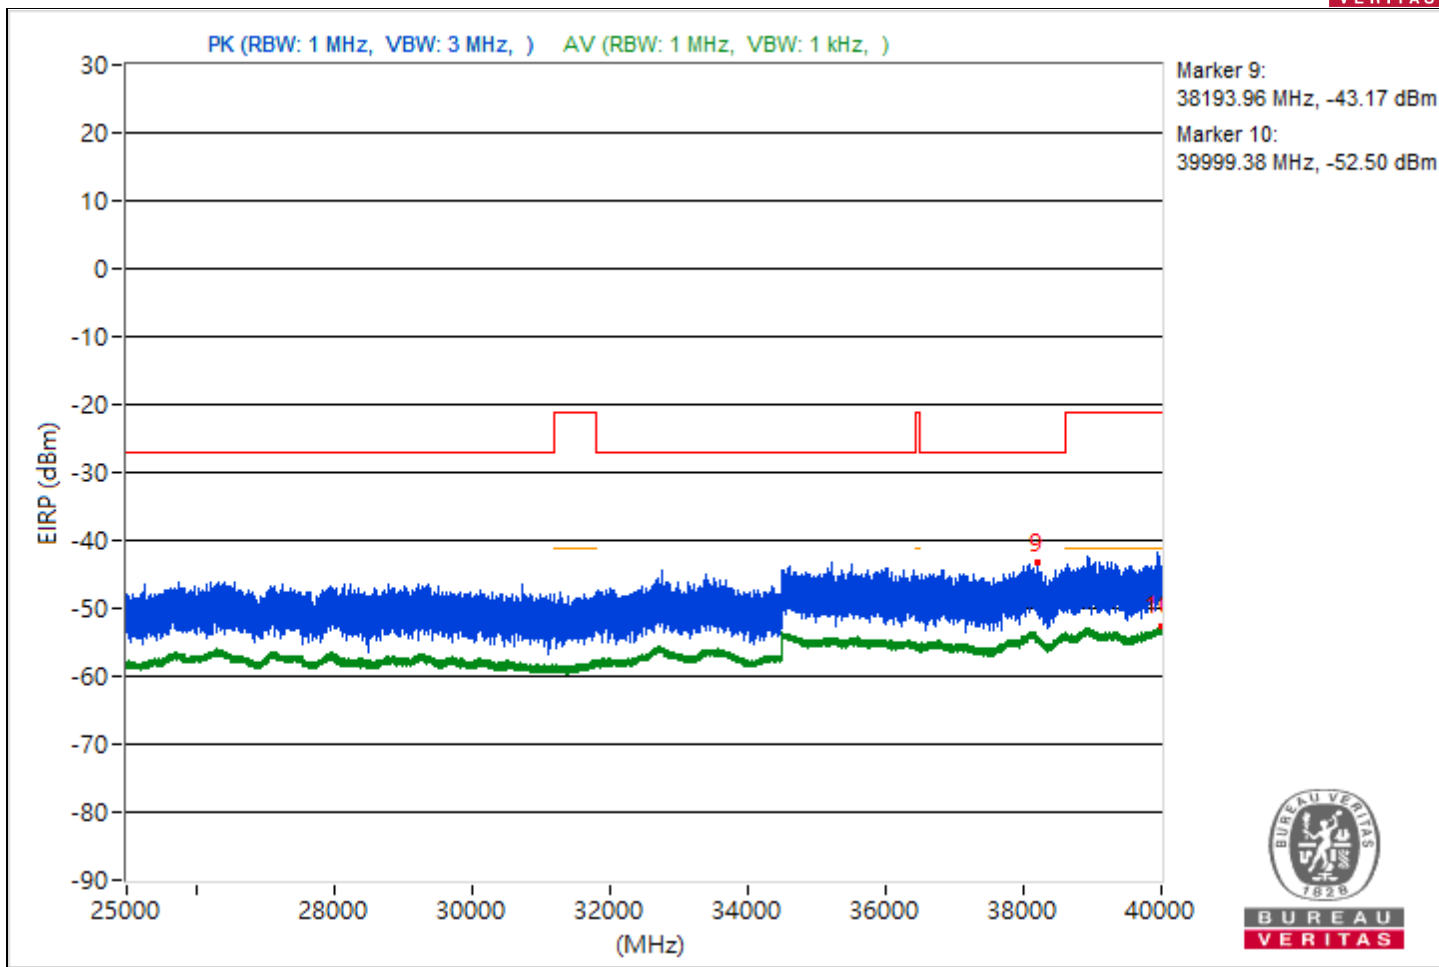



RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3248.48	55.45 PK	68.26	-12.81	-45.46	-52.85	4.92	-39.81
2	3811.51	47.17 AV	54	-6.83	-56.32	-55.75	4.92	-48.09
3	#7088.99	55.26 PK	68.26	-13	-46.21	-50.8	4.92	-40
4	8381.07	44.42 AV	54	-9.58	-59.19	-58.38	4.92	-50.84
5	#14230.22	55.99 PK	68.26	-12.27	-45.52	-49.98	4.92	-39.27
6	18985.6	46.29 AV	54	-7.71	-57.15	-56.66	4.92	-48.97
7	#24049.8	58.56 PK	68.26	-9.7	-46.48	-43.34	4.92	-36.7
8	23875.4	48.67 AV	54	-5.33	-54.24	-54.83	4.92	-46.59
9	#38591.11	52.01 PK	68.26	-16.25	-49.48	-54.01	4.92	-43.25
10	39998.49	42.78 AV	54	-11.22	-60.18	-60.66	4.92	-52.48

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

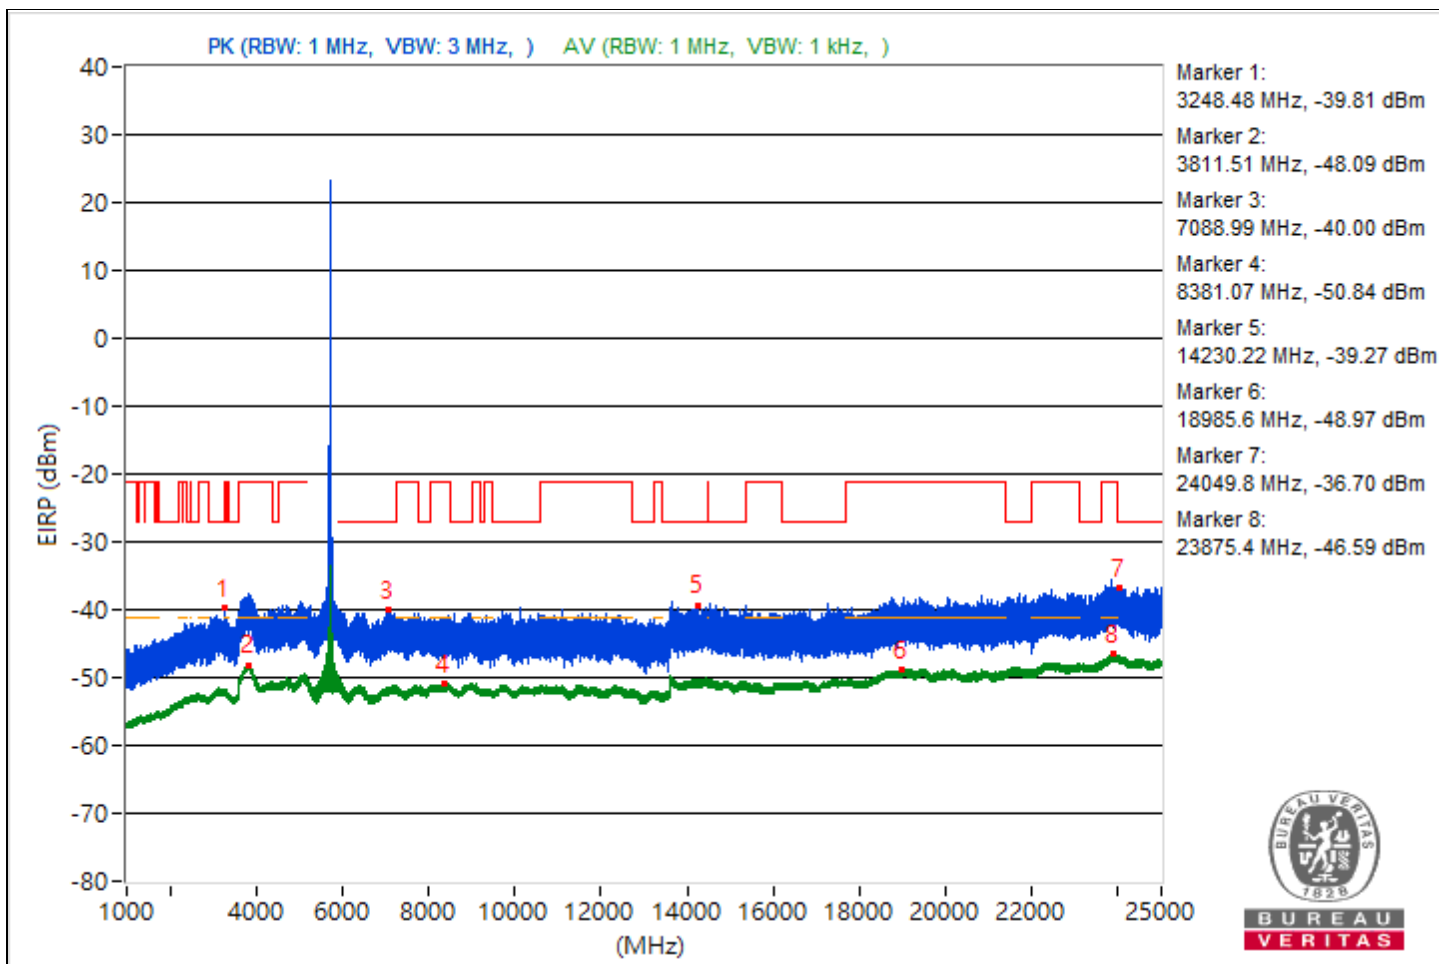

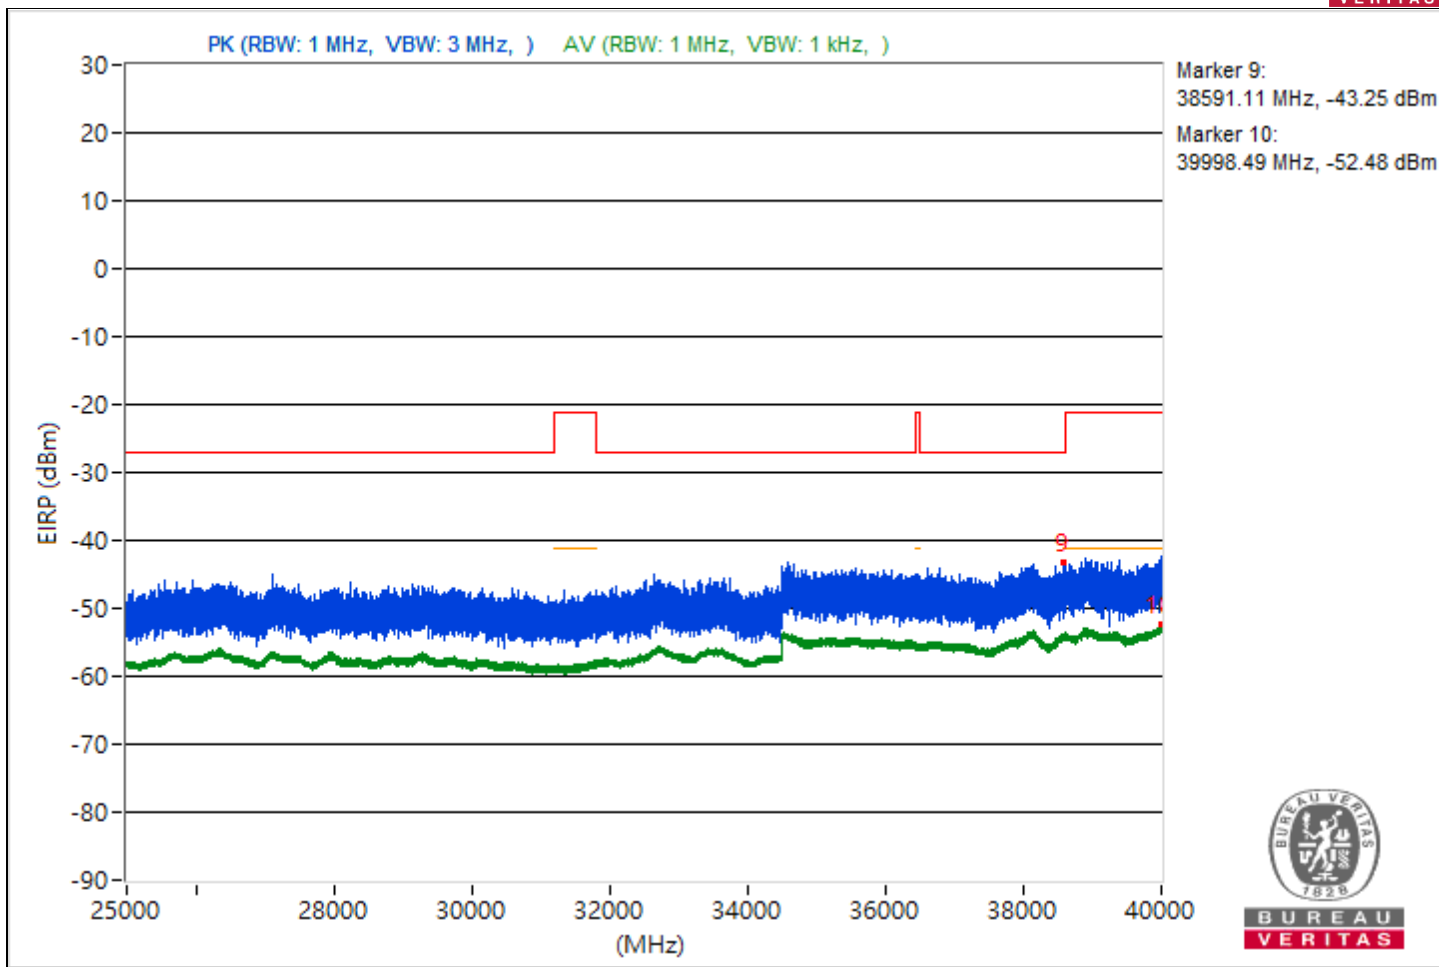



RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4443.92	55.24 PK	68.26	-13.02	-49.85	-46.63	4.92	-40.02
2	3825.2	47.36 AV	54	-6.64	-56.02	-55.66	4.92	-47.9
3	#5908.09	55.61 PK	68.26	-12.65	-45.89	-50.38	4.92	-39.65
4	11489.42	44.88 AV	54	-9.12	-59.53	-57.36	4.92	-50.38
5	#14230.31	55.63 PK	68.26	-12.63	-45.88	-50.33	4.92	-39.63
6	18992.5	46.25 AV	54	-7.75	-57.31	-56.6	4.92	-49.01
7	#24486.9	58.67 PK	68.26	-9.59	-42.7	-47.73	4.92	-36.59
8	23939.5	48.63 AV	54	-5.37	-54.99	-54.18	4.92	-46.63
9	#36186.84	51.26 PK	68.26	-17	-49.98	-55.59	4.92	-44
10	39998.93	42.76 AV	54	-11.24	-60.53	-60.34	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

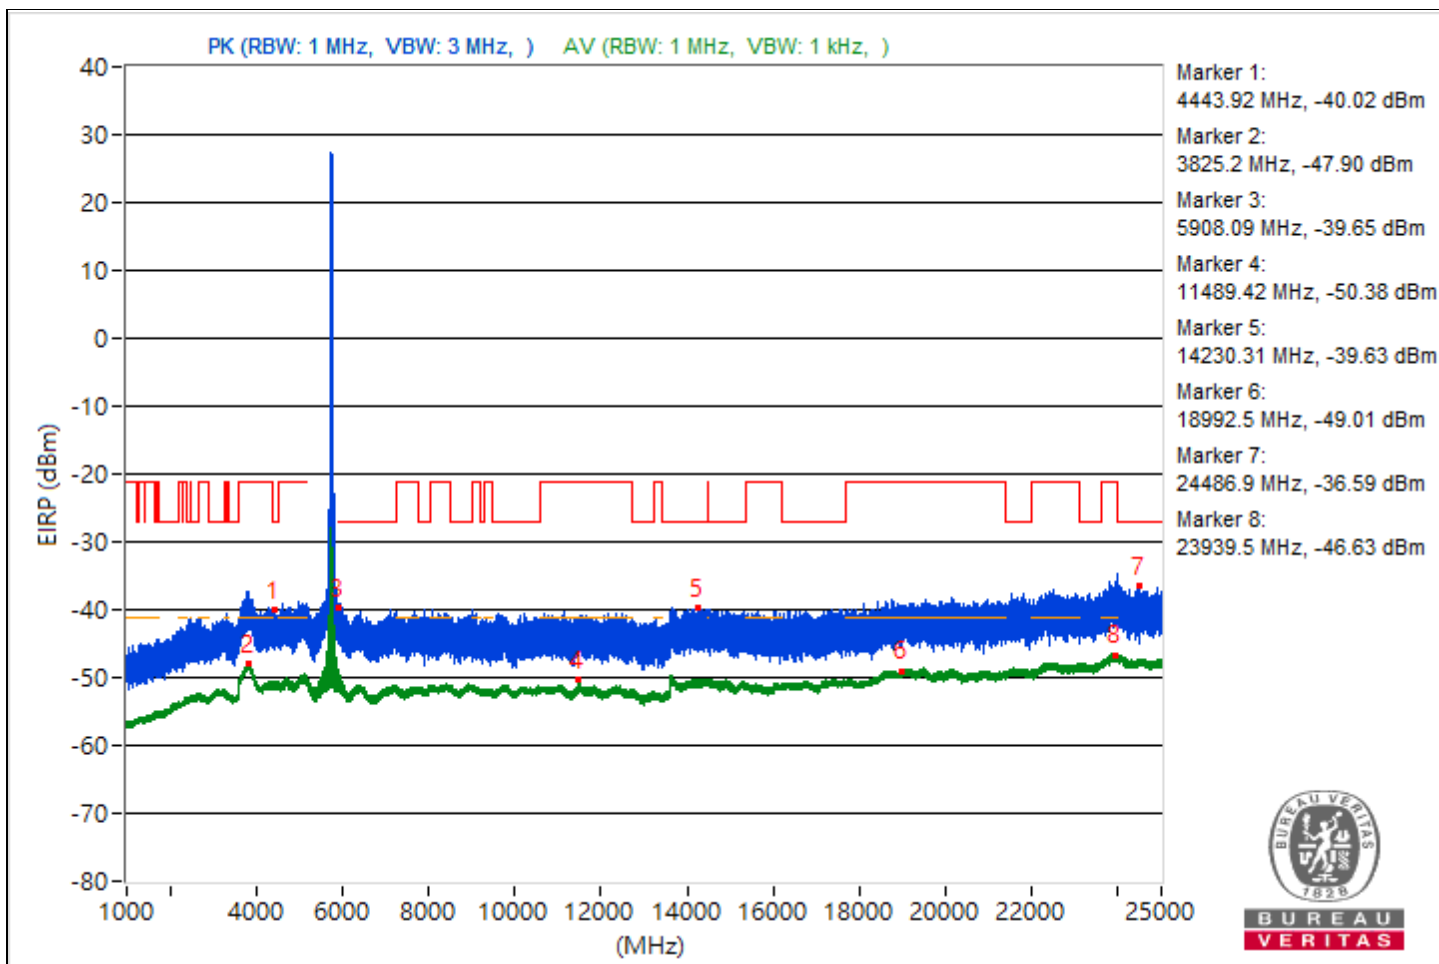

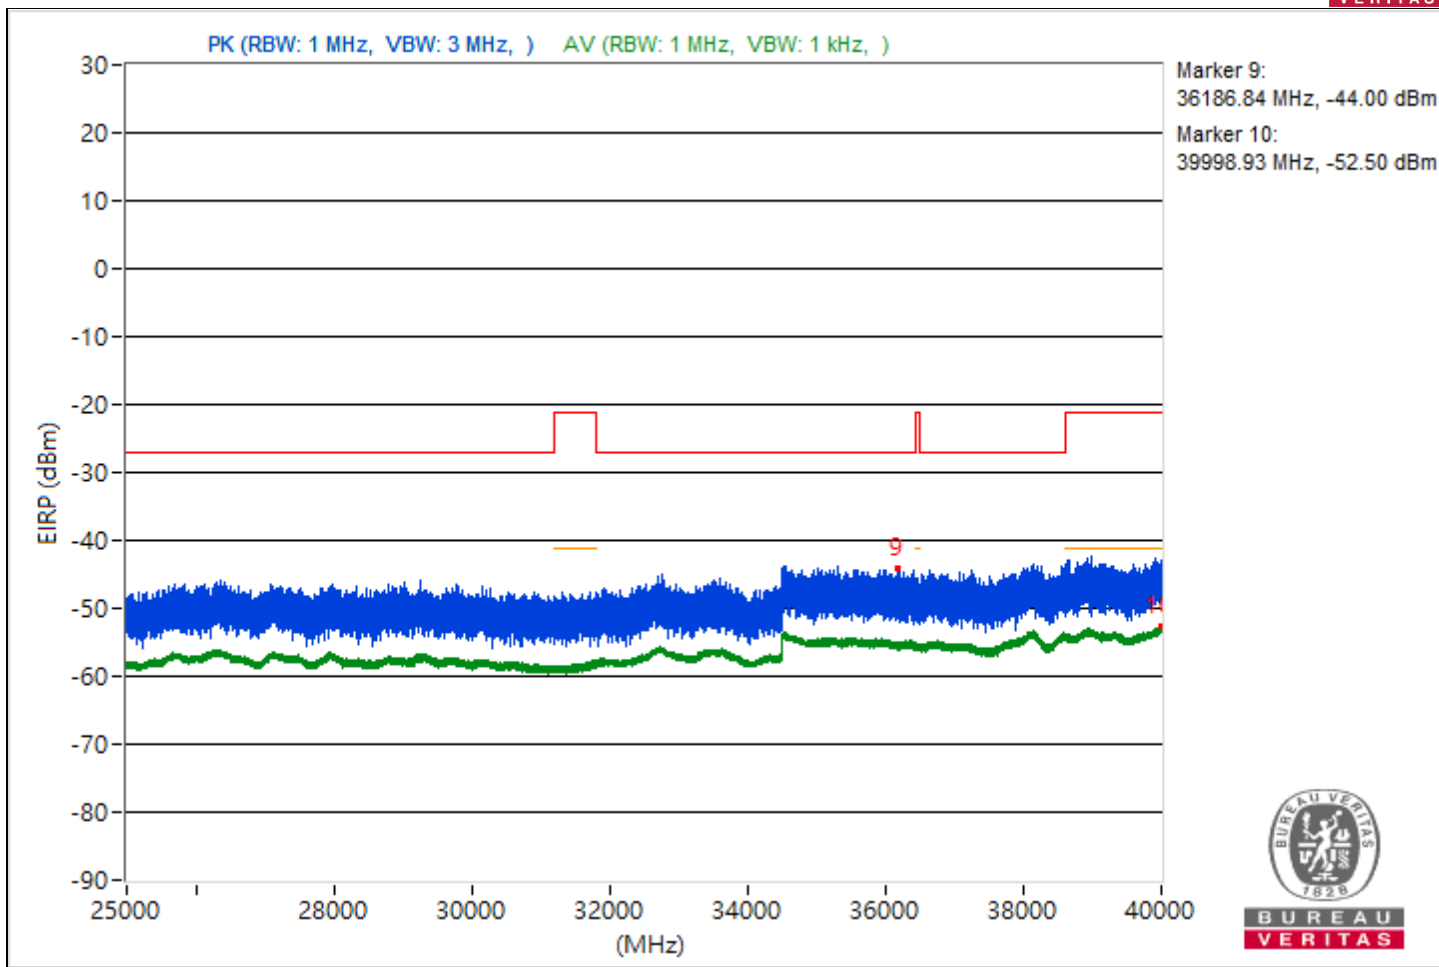



RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4482.03	54.95 PK	68.26	-13.31	-47.57	-49.04	4.92	-40.31
2	3836.17	47.22 AV	54	-6.78	-56.3	-55.66	4.92	-48.04
3	#5912.6	56.44 PK	68.26	-11.82	-49.82	-44.97	4.92	-38.82
4	11571.82	44.99 AV	54	-9.01	-58.9	-57.61	4.92	-50.27
5	#13666.22	55.45 PK	68.26	-12.81	-50.74	-45.99	4.92	-39.81
6	18976.2	46.18 AV	54	-7.82	-56.75	-57.29	4.92	-49.08
7	#24117.9	58.8 PK	68.26	-9.46	-41.91	-50.81	4.92	-36.46
8	23877.5	48.68 AV	54	-5.32	-54.06	-55.01	4.92	-46.58
9	#35073.78	52.22 PK	68.26	-16.04	-55.38	-48.82	4.92	-43.04
10	39994.58	42.51 AV	54	-11.49	-60.41	-60.98	4.92	-52.75

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

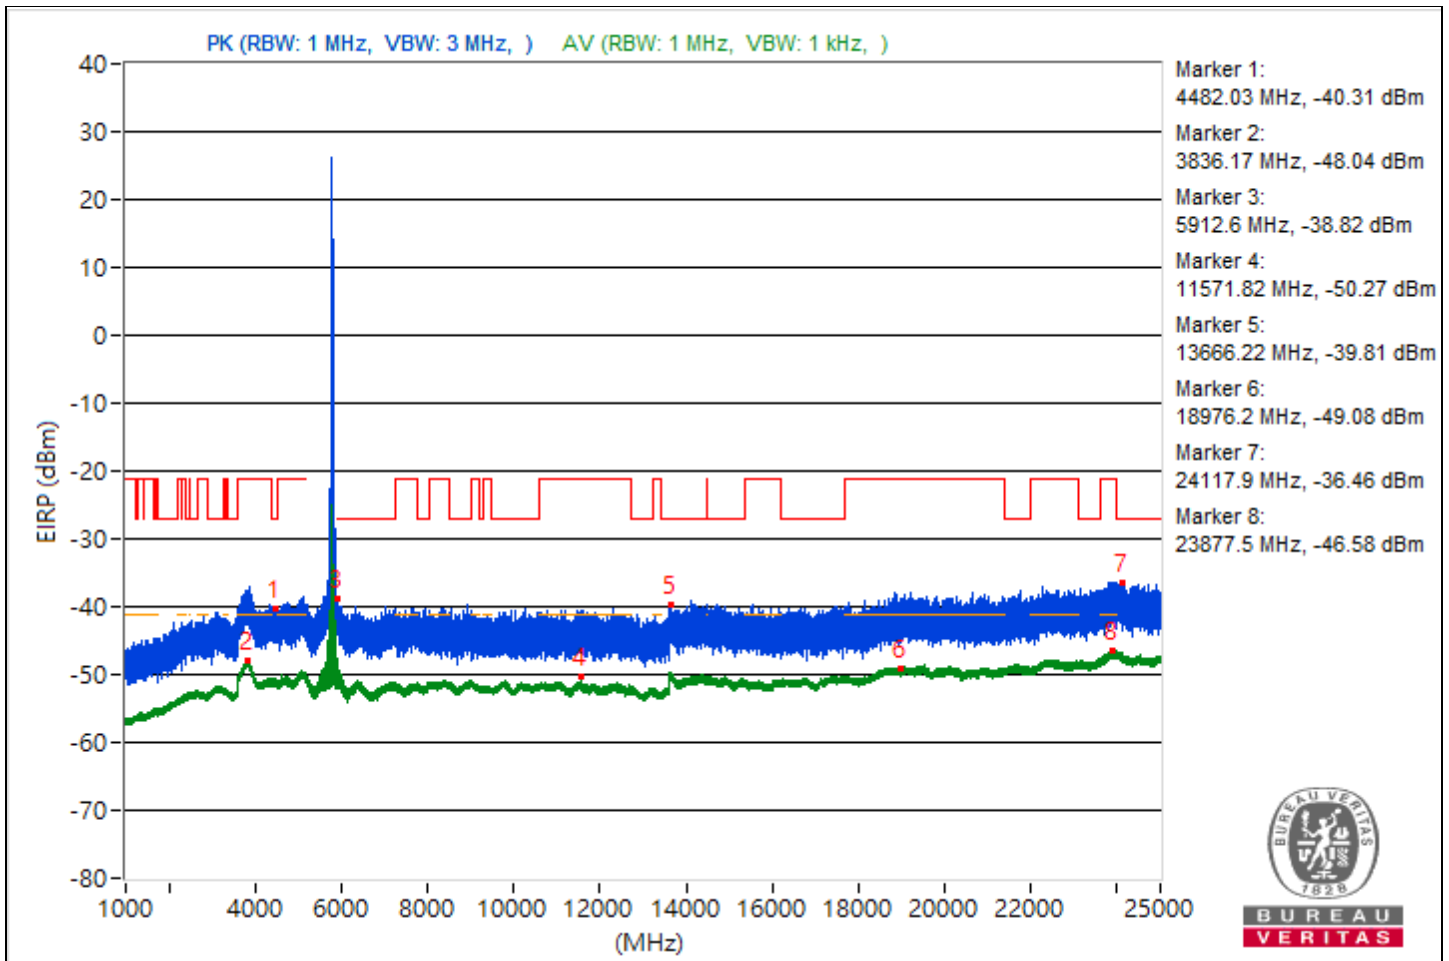

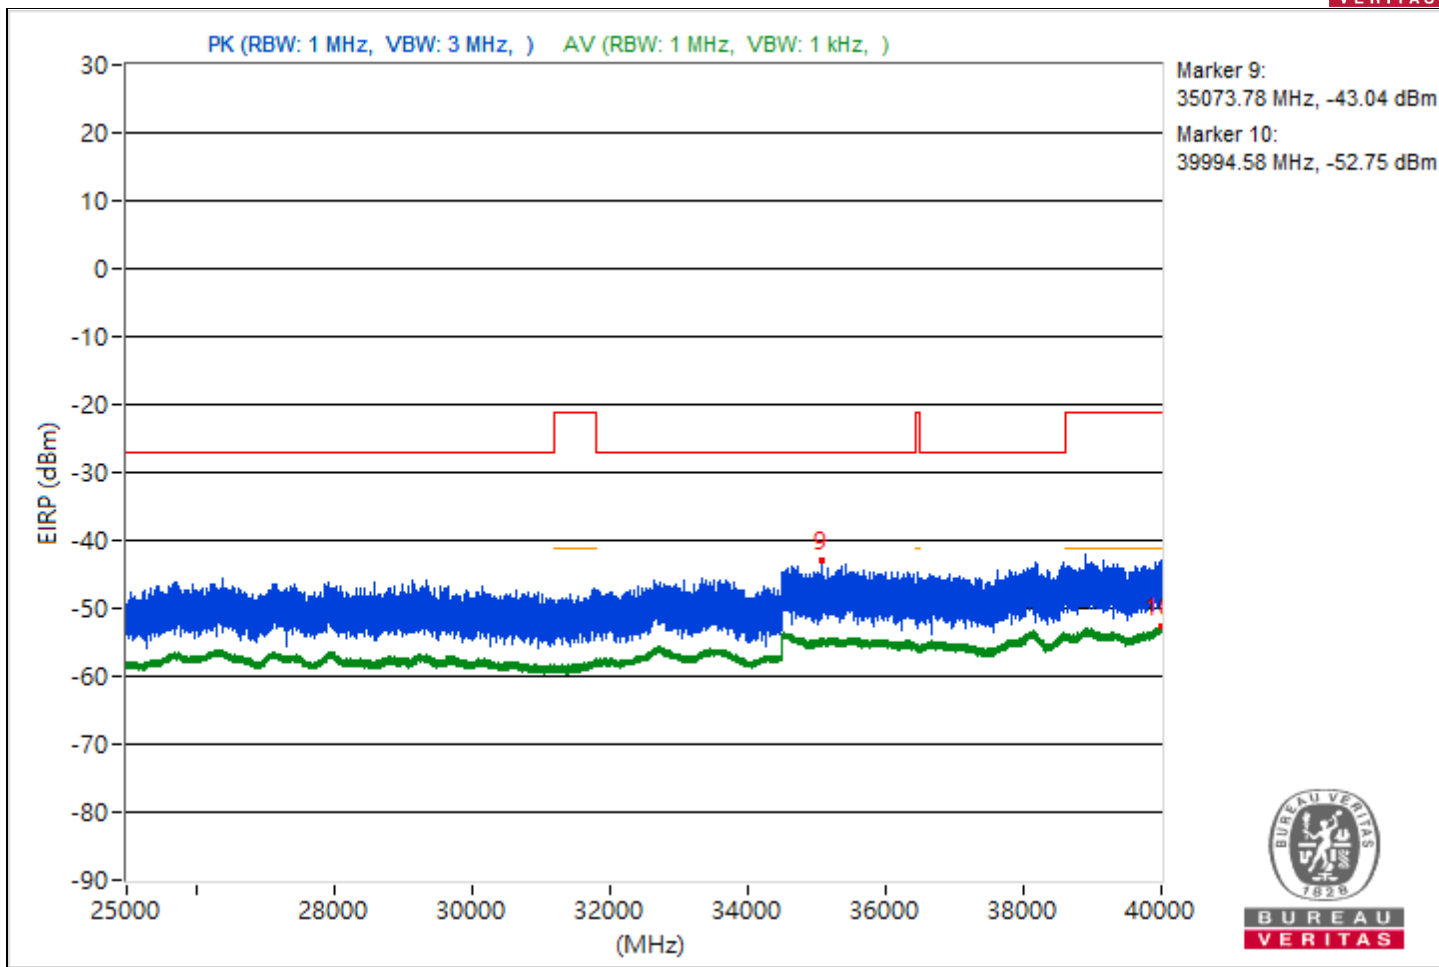





RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4492.38	55.2 PK	68.26	-13.06	-50.49	-46.41	4.92	-40.06
2	3790.2	47.15 AV	54	-6.85	-55.75	-56.35	4.92	-48.11
3	#5901.48	59.59 PK	68.26	-8.67	-41.89	-46.46	4.92	-35.67
4	11648.53	44.73 AV	54	-9.27	-60.1	-57.27	4.92	-50.53
5	#14458.22	55.29 PK	68.26	-12.97	-45.85	-51.89	4.92	-39.97
6	18896.2	46.09 AV	54	-7.91	-57.52	-56.71	4.92	-49.17
7	#24910.4	59.33 PK	68.26	-8.93	-44.81	-43.09	4.92	-35.93
8	23935	48.41 AV	54	-5.59	-55.4	-54.23	4.92	-46.85
9	#38185.51	51.69 PK	68.26	-16.57	-56.26	-49.29	4.92	-43.57
10	39989.69	42.58 AV	54	-11.42	-60.46	-60.76	4.92	-52.68

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

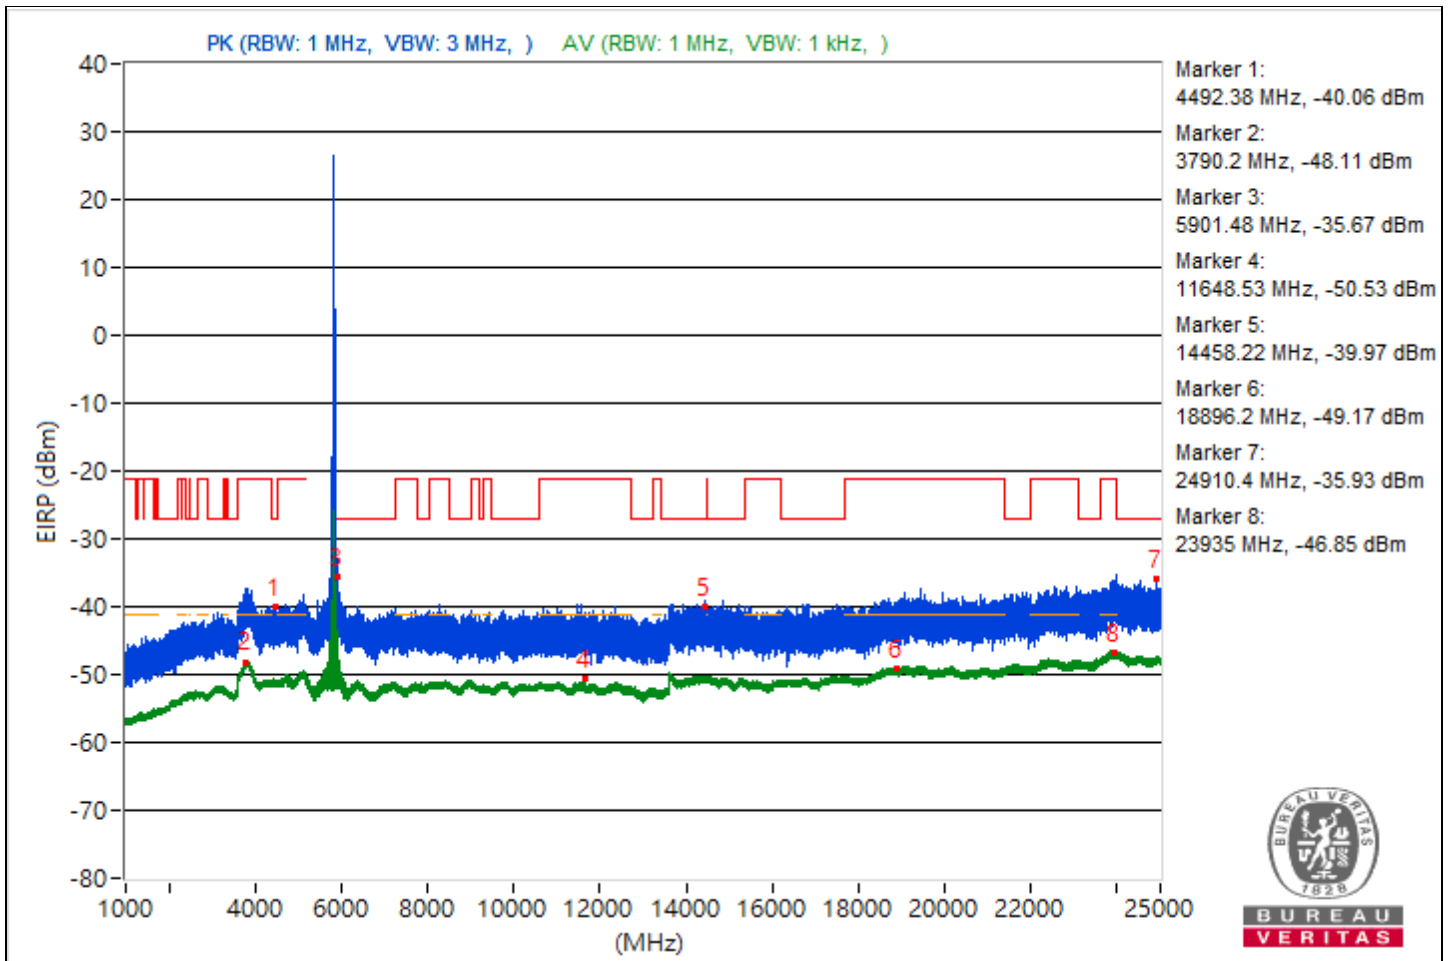

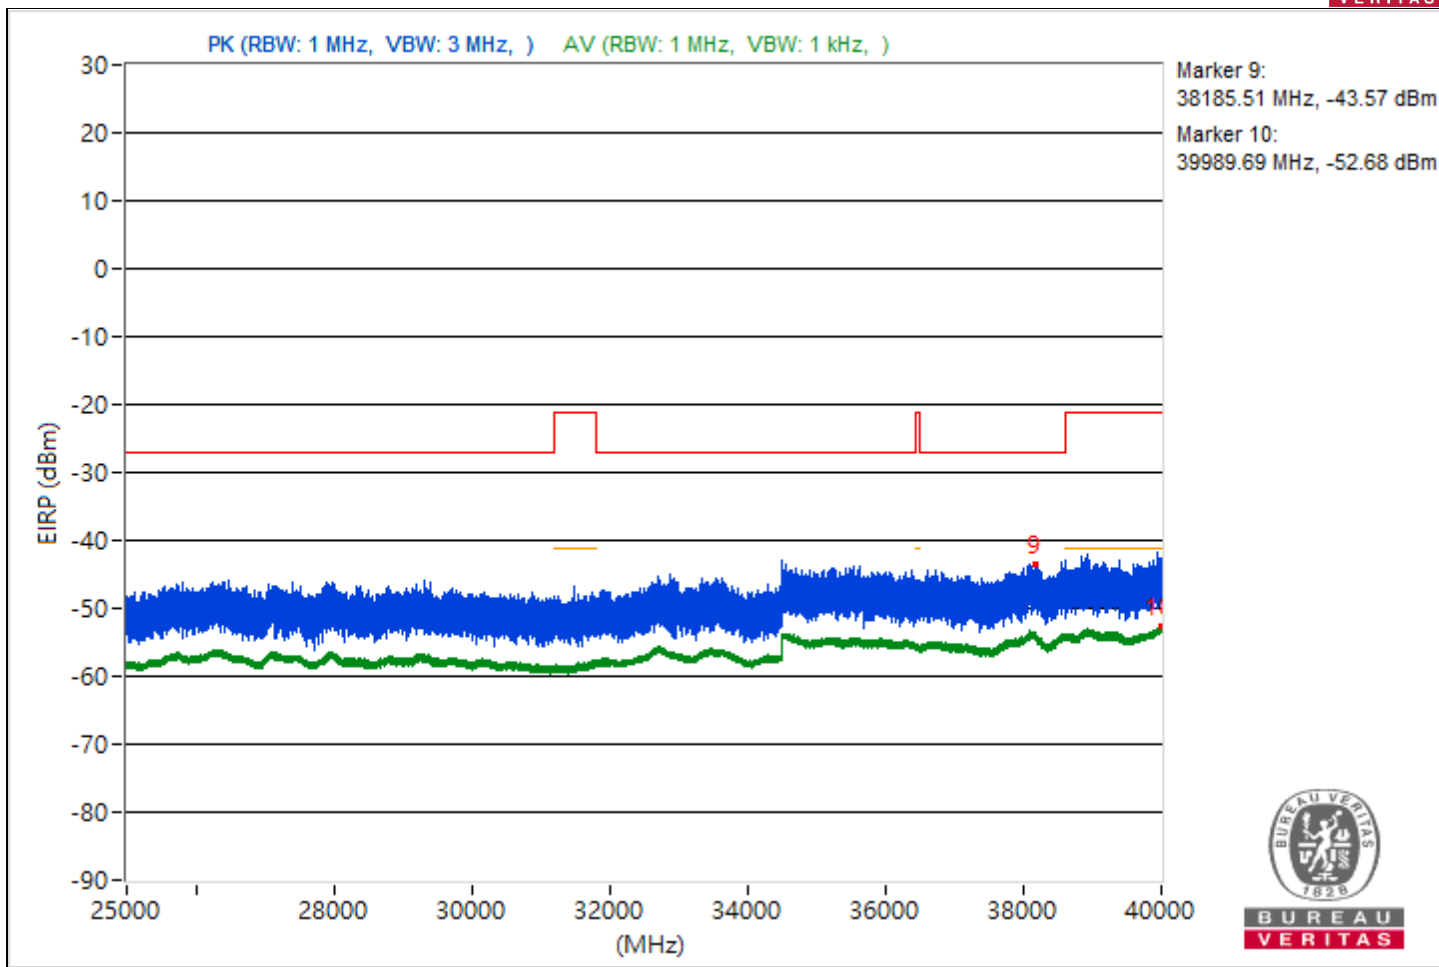



RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4459.32	54.74 PK	68.26	-13.52	-46.36	-52.66	4.92	-40.52
2	5091.73	47.39 AV	54	-6.61	-55.66	-55.94	4.92	-47.87
3	#7890.72	55.28 PK	68.26	-12.98	-46.04	-51.26	4.92	-39.98
4	9004.27	44.13 AV	54	-9.87	-59.59	-58.59	4.92	-51.13
5	#14621.33	55.82 PK	68.26	-12.44	-51.09	-45.39	4.92	-39.44
6	18997.5	46.31 AV	54	-7.69	-56.48	-57.33	4.92	-48.95
7	#24201.8	58.98 PK	68.26	-9.28	-45.56	-43.18	4.92	-36.28
8	23944.7	48.55 AV	54	-5.45	-54.18	-55.16	4.92	-46.71
9	#37989.6	52.27 PK	68.26	-15.99	-55.97	-48.65	4.92	-42.99
10	39993.07	42.73 AV	54	-11.27	-60.19	-60.74	4.92	-52.53

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

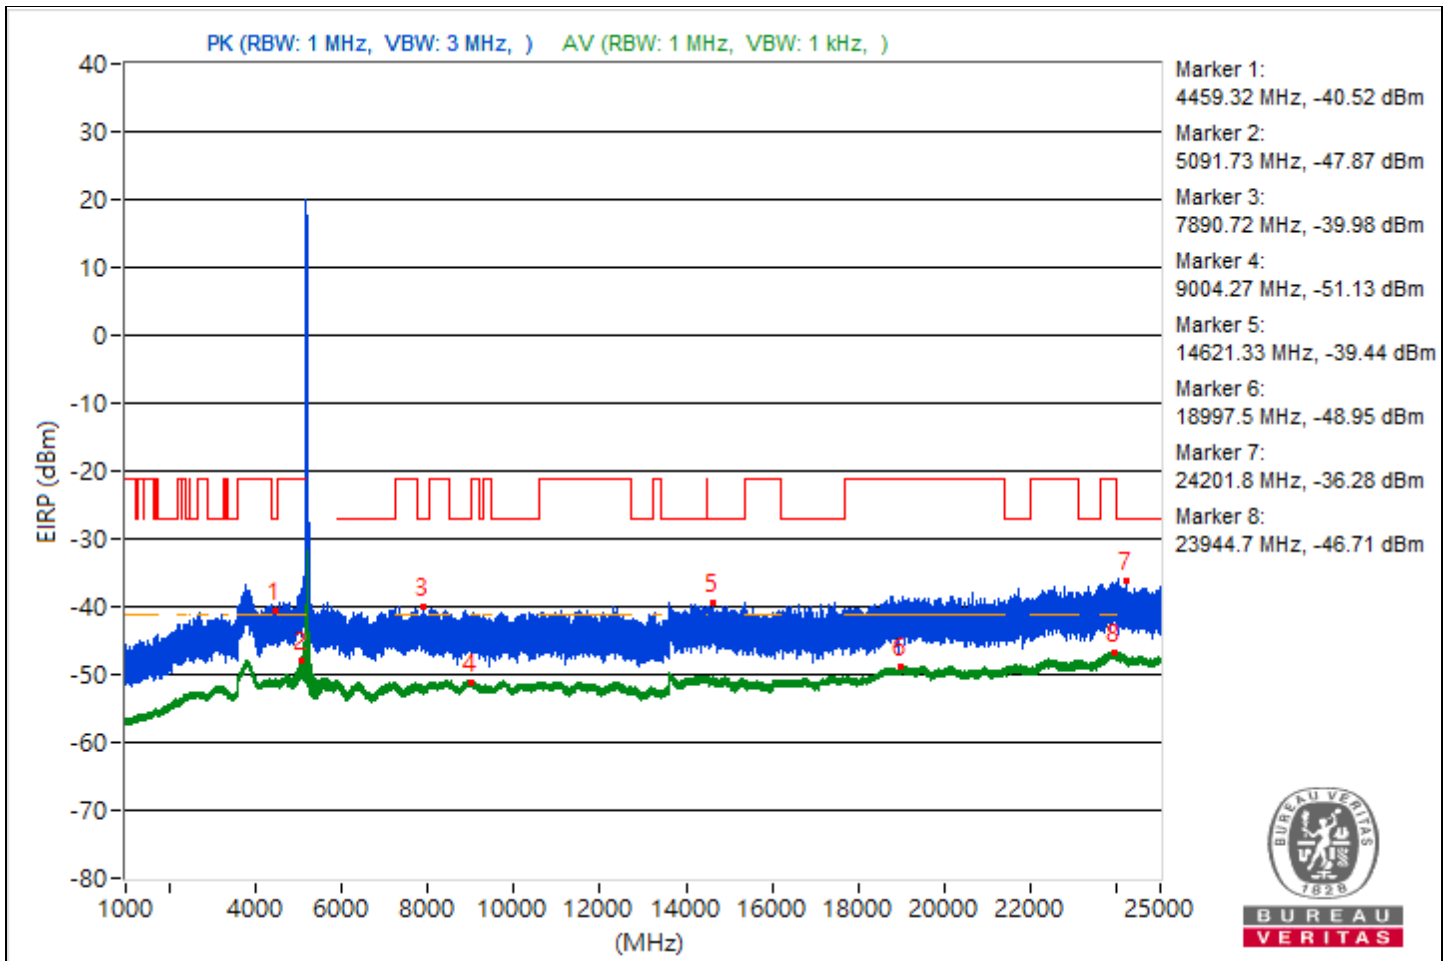

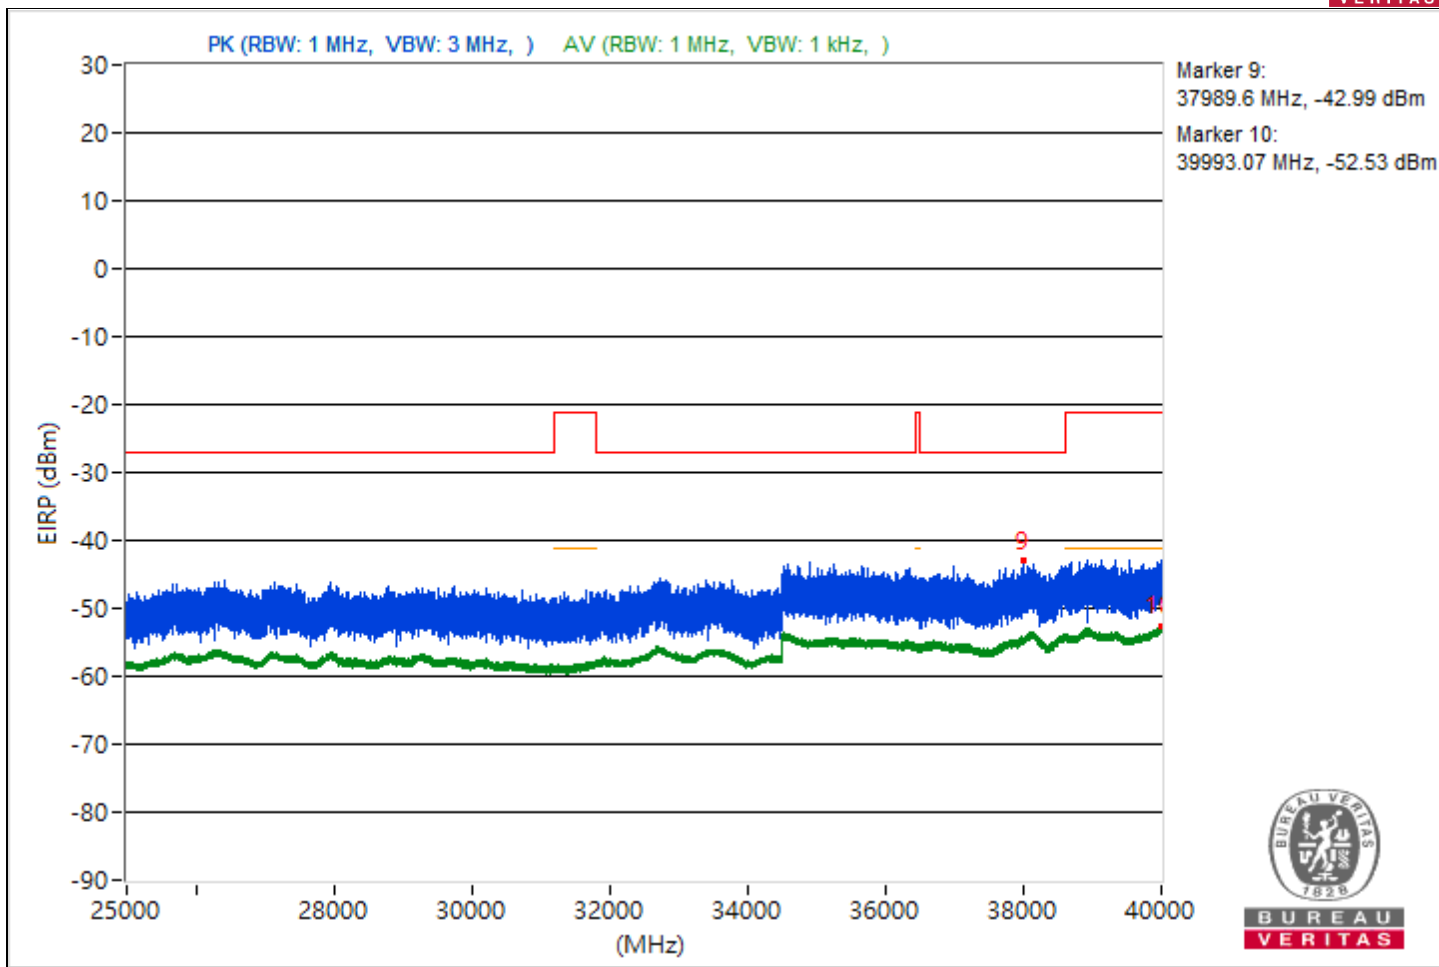



RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4431.09	55.55 PK	68.26	-12.71	-50.61	-45.89	4.92	-39.71
2	5095.7	47.58 AV	54	-6.42	-55.4	-55.83	4.92	-47.68
3	#5973.97	55.56 PK	68.26	-12.7	-49.88	-46.15	4.92	-39.7
4	11027.64	44.14 AV	54	-9.86	-59.67	-58.51	4.92	-51.12
5	#14012.8	55.68 PK	68.26	-12.58	-45.61	-50.98	4.92	-39.58
6	18991	46.05 AV	54	-7.95	-56.82	-57.49	4.92	-49.21
7	#24092.1	58.23 PK	68.26	-10.03	-42.95	-48.83	4.92	-37.03
8	23860.8	48.61 AV	54	-5.39	-54.14	-55.06	4.92	-46.65
9	#38126.13	52.18 PK	68.26	-16.08	-49.13	-54.39	4.92	-43.08
10	39999.82	42.54 AV	54	-11.46	-60.34	-60.99	4.92	-52.72

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

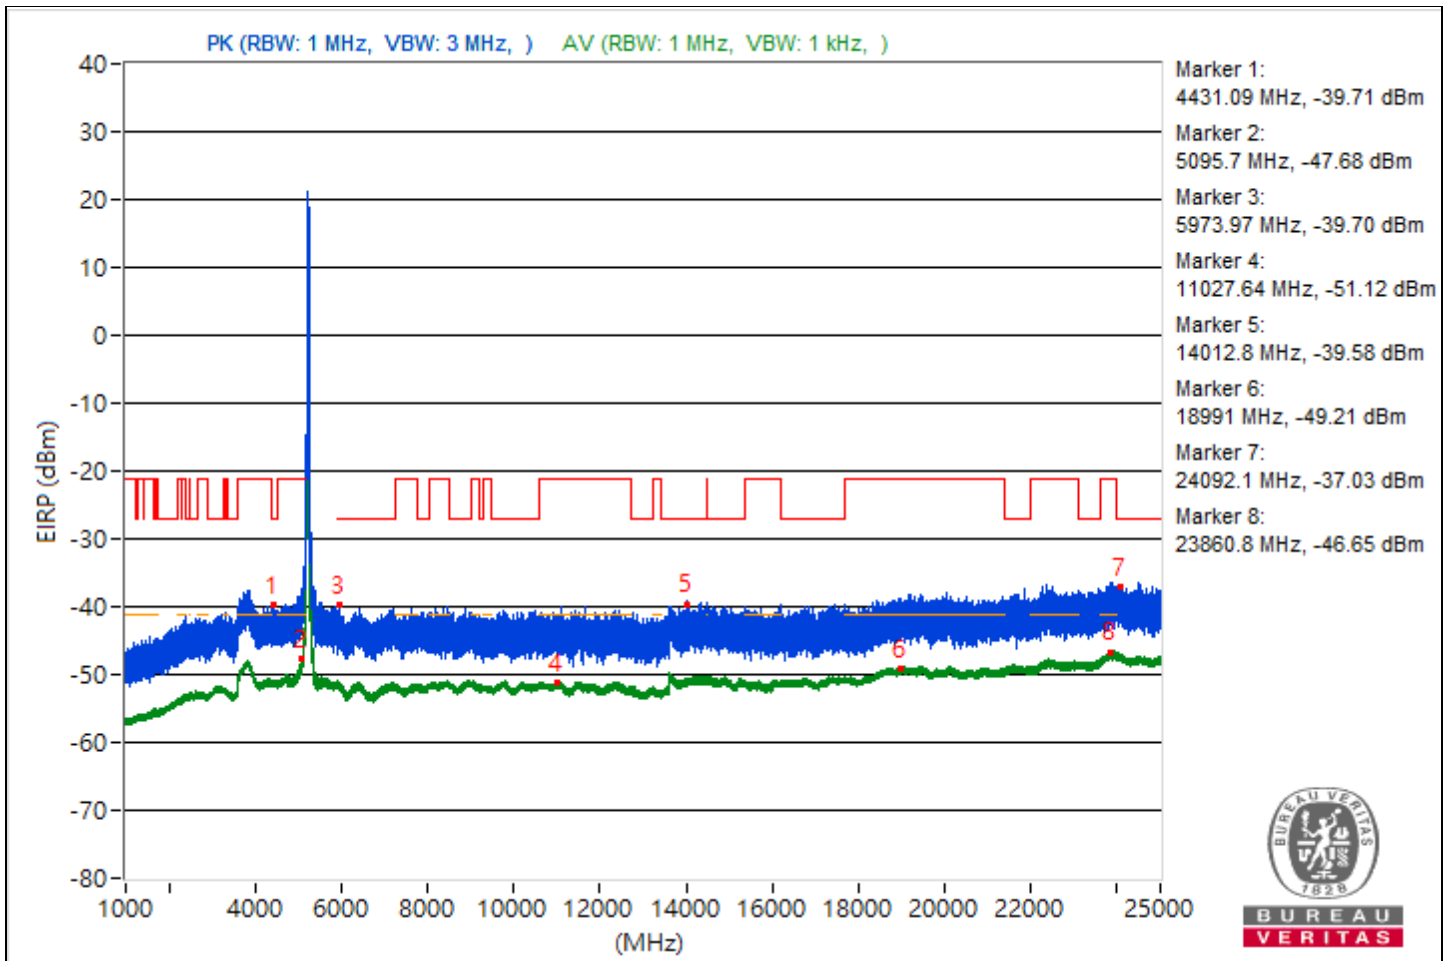

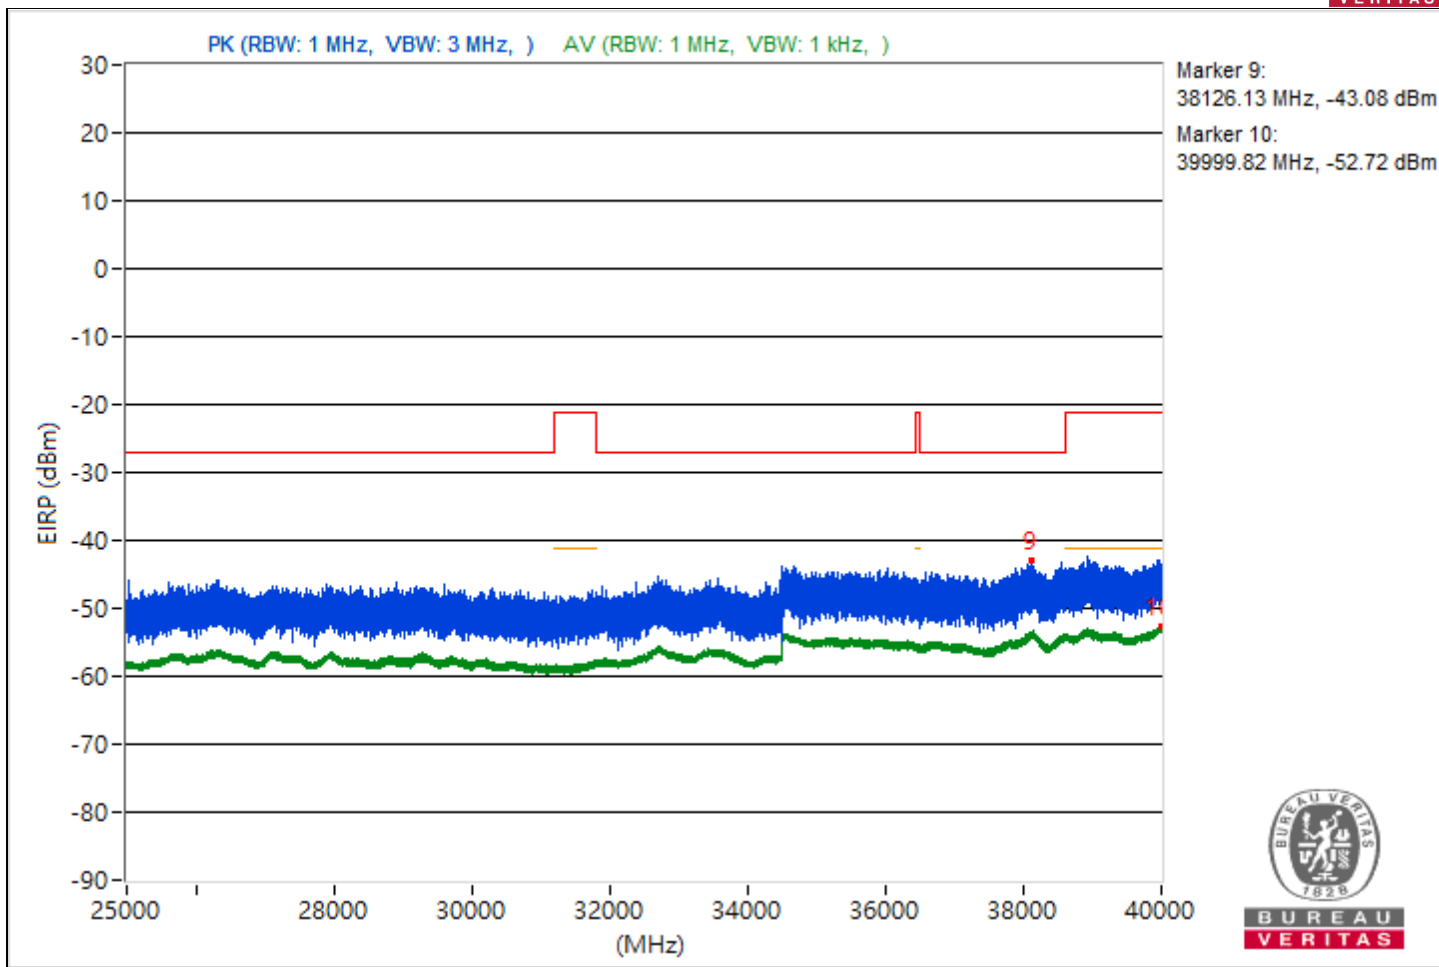



RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4433.34	54.99 PK	68.26	-13.27	-51.91	-46.23	4.92	-40.27
2	3815.17	47.13 AV	54	-6.87	-55.8	-56.34	4.92	-48.13
3	#12700.89	55.06 PK	68.26	-13.2	-52.84	-45.92	4.92	-40.2
4	8471.2	44.25 AV	54	-9.75	-59.57	-58.39	4.92	-51.01
5	#14524	56.11 PK	68.26	-12.15	-45.25	-50.3	4.92	-39.15
6	18761.7	46.14 AV	54	-7.86	-56.74	-57.39	4.92	-49.12
7	#24389.7	58.82 PK	68.26	-9.44	-46.34	-43.02	4.92	-36.44
8	23924.6	48.78 AV	54	-5.22	-54.57	-54.26	4.92	-46.48
9	#34616.36	51.92 PK	68.26	-16.34	-49.4	-54.64	4.92	-43.34
10	39996.62	42.52 AV	54	-11.48	-60.96	-60.4	4.92	-52.74

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

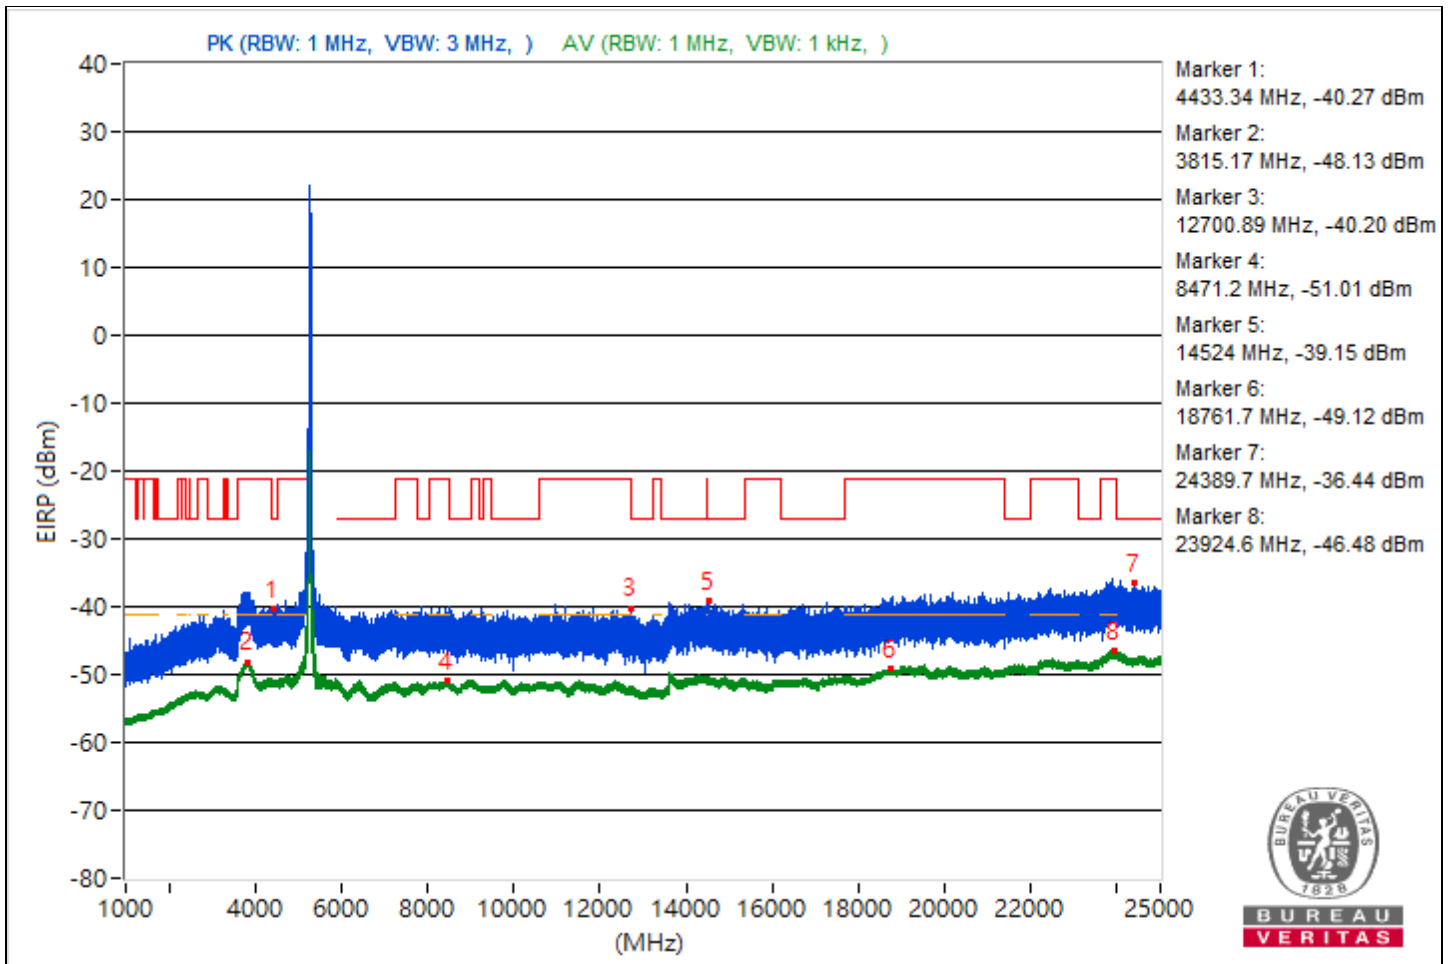

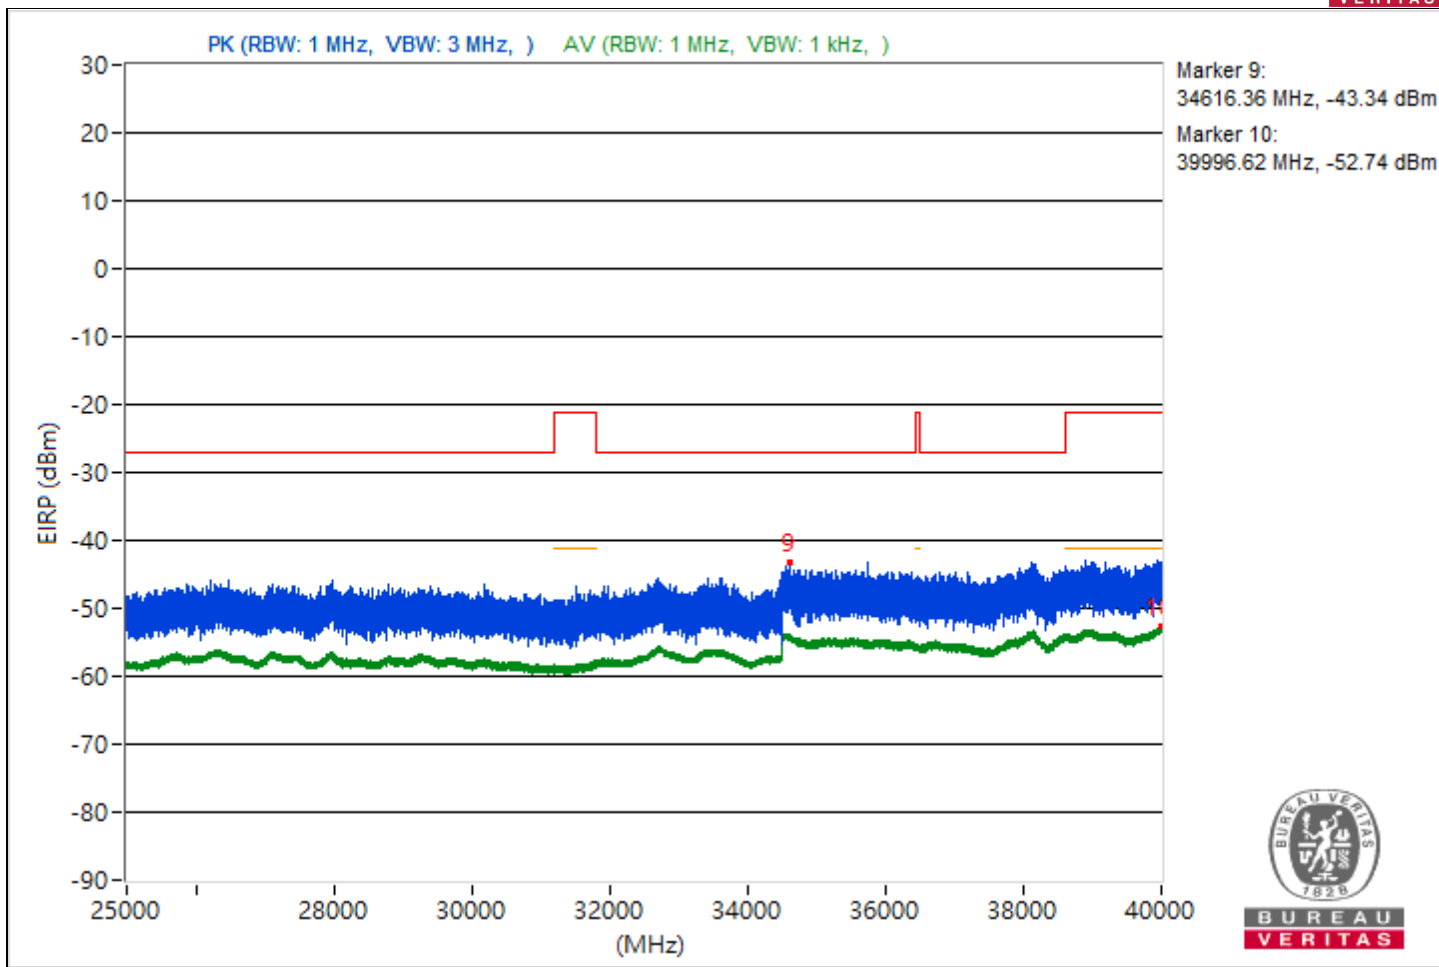





RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4487.71	54.61 PK	68.26	-13.65	-51.67	-46.79	4.92	-40.65
2	3843.17	47.27 AV	54	-6.73	-55.93	-55.91	4.92	-47.99
3	#8940.8	55.88 PK	68.26	-12.38	-51.16	-45.3	4.92	-39.38
4	9013.78	44.16 AV	54	-9.84	-59.6	-58.54	4.92	-51.1
5	#14071.2	55.44 PK	68.26	-12.82	-45.48	-52.81	4.92	-39.82
6	18990.4	46.18 AV	54	-7.82	-56.65	-57.4	4.92	-49.08
7	#24017	59.57 PK	68.26	-8.69	-45.33	-42.4	4.92	-35.69
8	23915.1	48.74 AV	54	-5.26	-54.59	-54.31	4.92	-46.52
9	#34525.42	53.26 PK	68.26	-15	-48.93	-51.21	4.92	-42
10	39995.56	42.73 AV	54	-11.27	-60.42	-60.49	4.92	-52.53

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

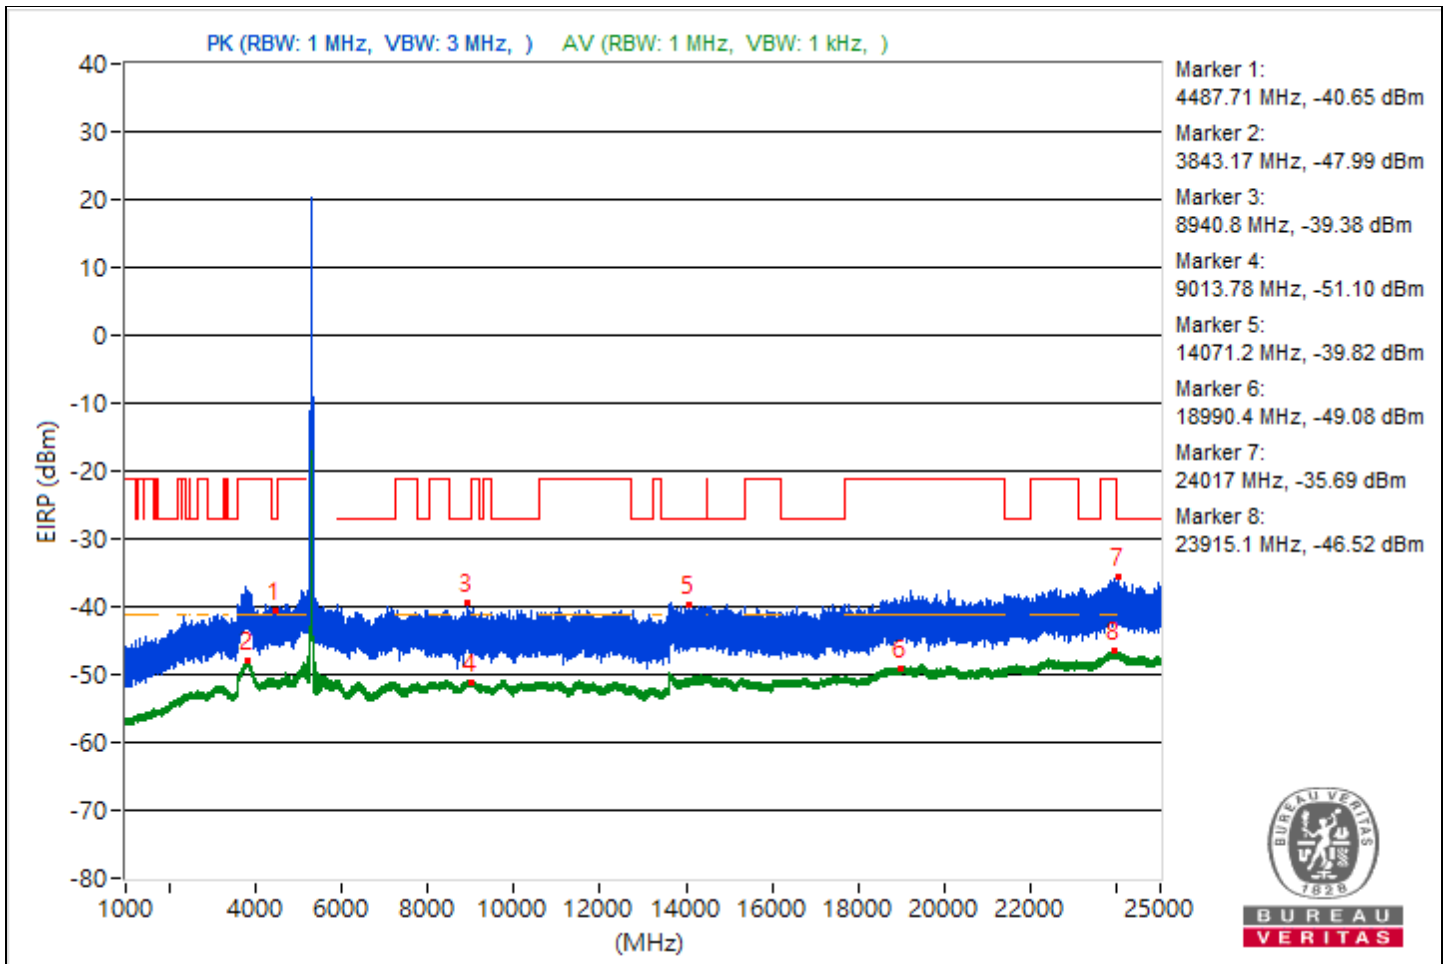

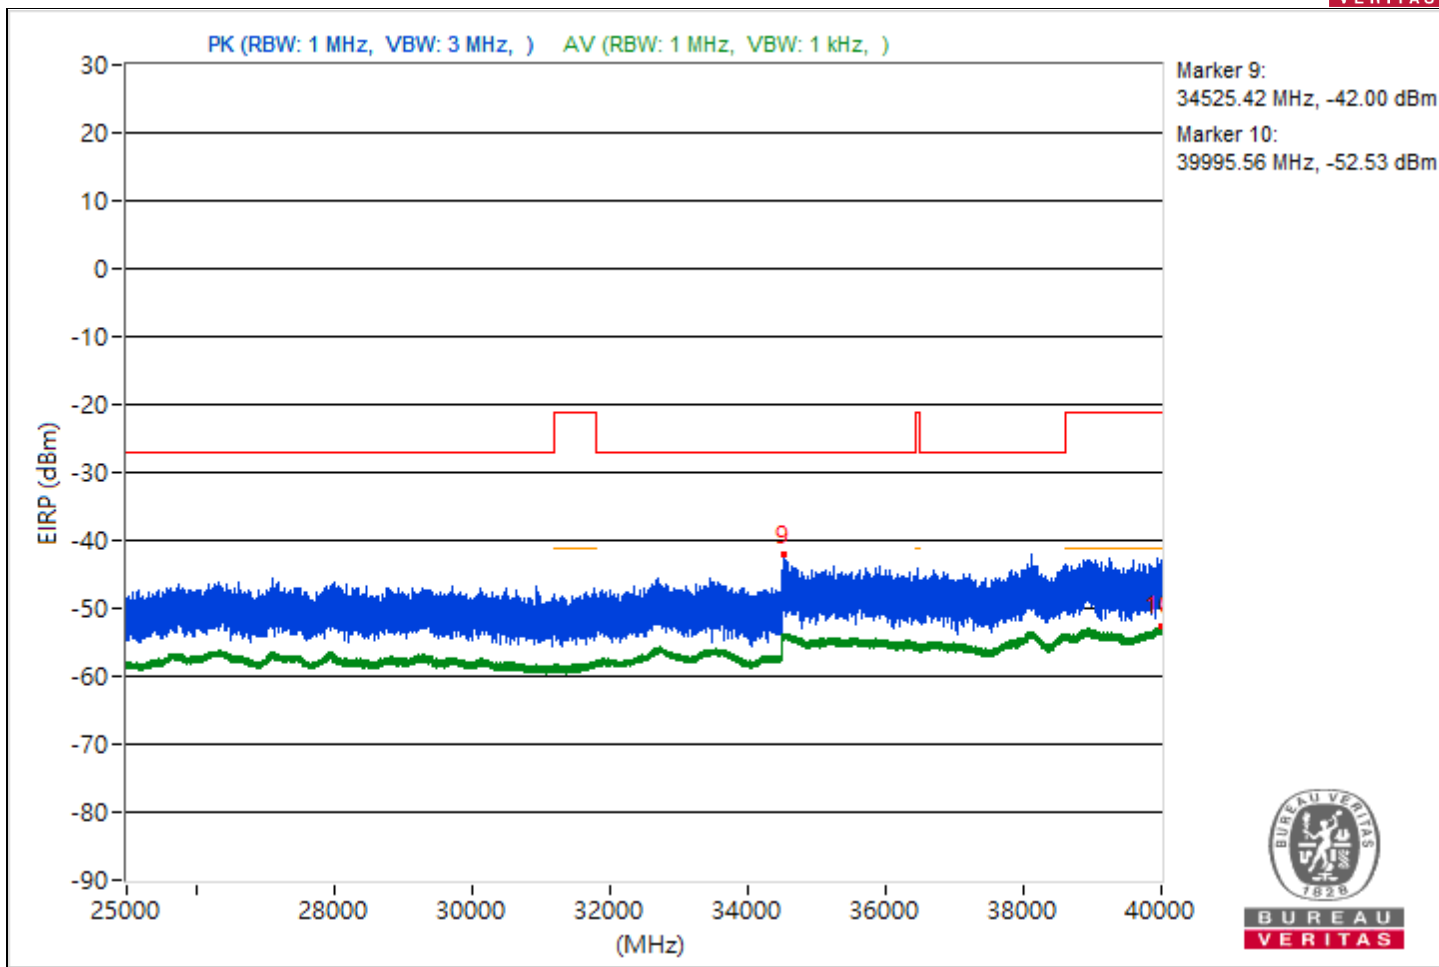



RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4449.6	55.57 PK	68.26	-12.69	-48.34	-47	4.92	-39.69
2	3820.38	47.3 AV	54	-6.7	-56.23	-55.57	4.92	-47.96
3	#7230.62	55.15 PK	68.26	-13.11	-45.99	-52.07	4.92	-40.11
4	8430.13	44.16 AV	54	-9.84	-58.66	-59.44	4.92	-51.1
5	#15192.53	56.13 PK	68.26	-12.13	-53.07	-44.64	4.92	-39.13
6	18988.6	46.29 AV	54	-7.71	-56.76	-57.05	4.92	-48.97
7	#24037	58.76 PK	68.26	-9.5	-42.83	-46.98	4.92	-36.5
8	23843.1	48.77 AV	54	-5.23	-54.2	-54.65	4.92	-46.49
9	#34581.24	51.89 PK	68.26	-16.37	-55.4	-49.23	4.92	-43.37
10	39986.84	42.53 AV	54	-11.47	-61.02	-60.33	4.92	-52.73

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

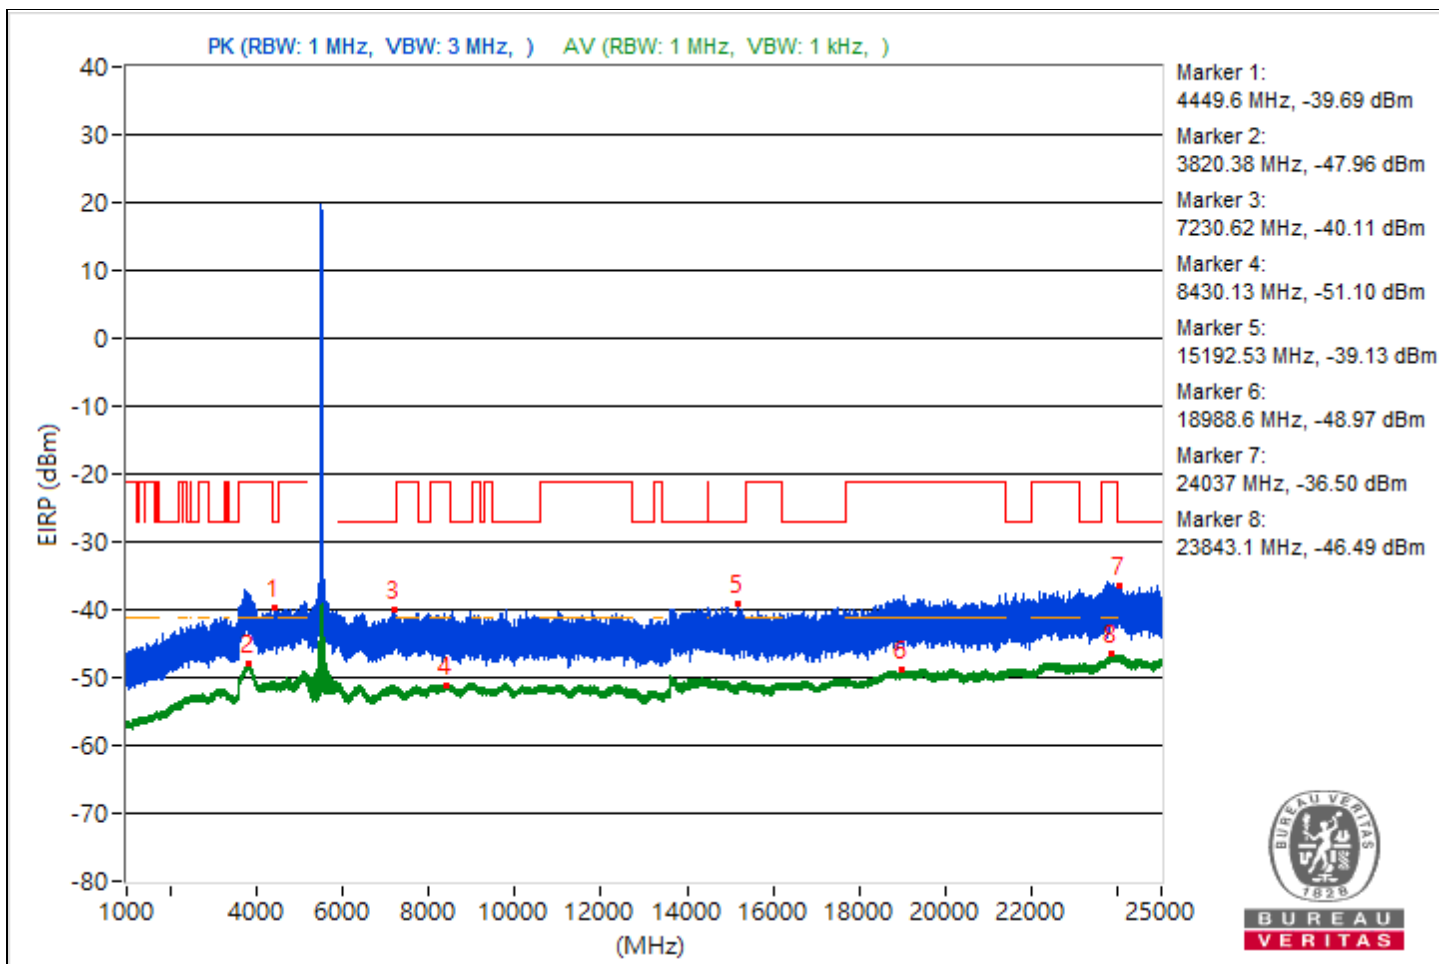

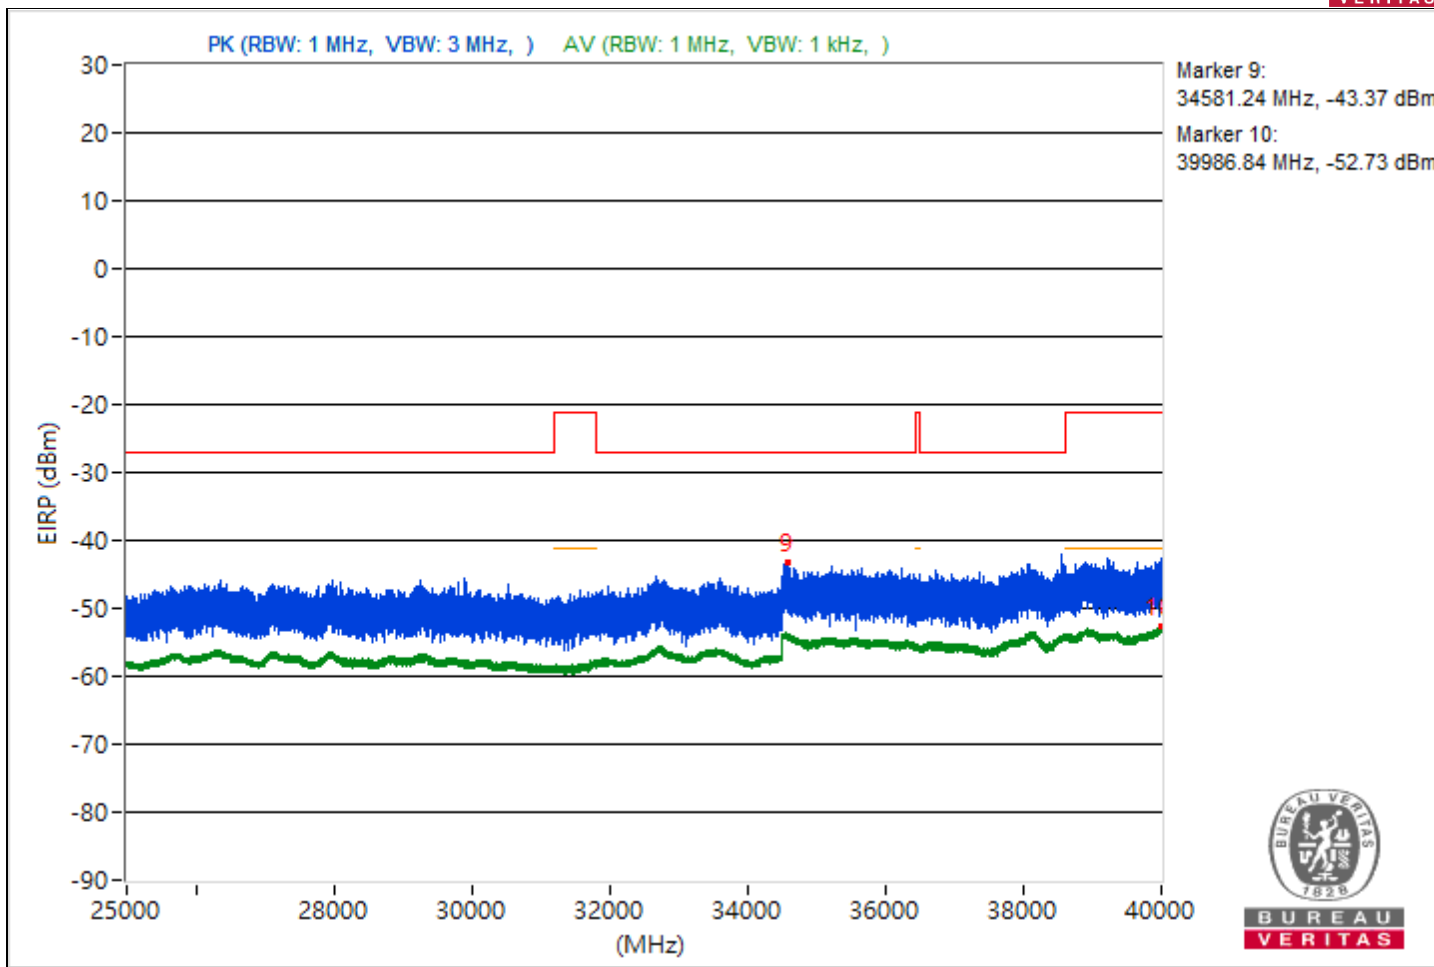



RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4441.98	55.16 PK	68.26	-13.1	-46.41	-50.67	4.92	-40.1
2	3811.51	47.37 AV	54	-6.63	-56.11	-55.56	4.92	-47.89
3	#5933.91	56.61 PK	68.26	-11.65	-47.68	-45.7	4.92	-38.65
4	8439.91	44.13 AV	54	-9.87	-58.74	-59.4	4.92	-51.13
5	#13639.29	56.43 PK	68.26	-11.83	-45.06	-49.59	4.92	-38.83
6	18998.5	46.33 AV	54	-7.67	-57.09	-56.64	4.92	-48.93
7	#24609.9	58.25 PK	68.26	-10.01	-43.11	-48.17	4.92	-37.01
8	23859.2	48.73 AV	54	-5.27	-54.18	-54.76	4.92	-46.53
9	#38077.87	51.75 PK	68.26	-16.51	-56.32	-49.2	4.92	-43.51
10	39997.87	42.65 AV	54	-11.35	-60.27	-60.83	4.92	-52.61

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

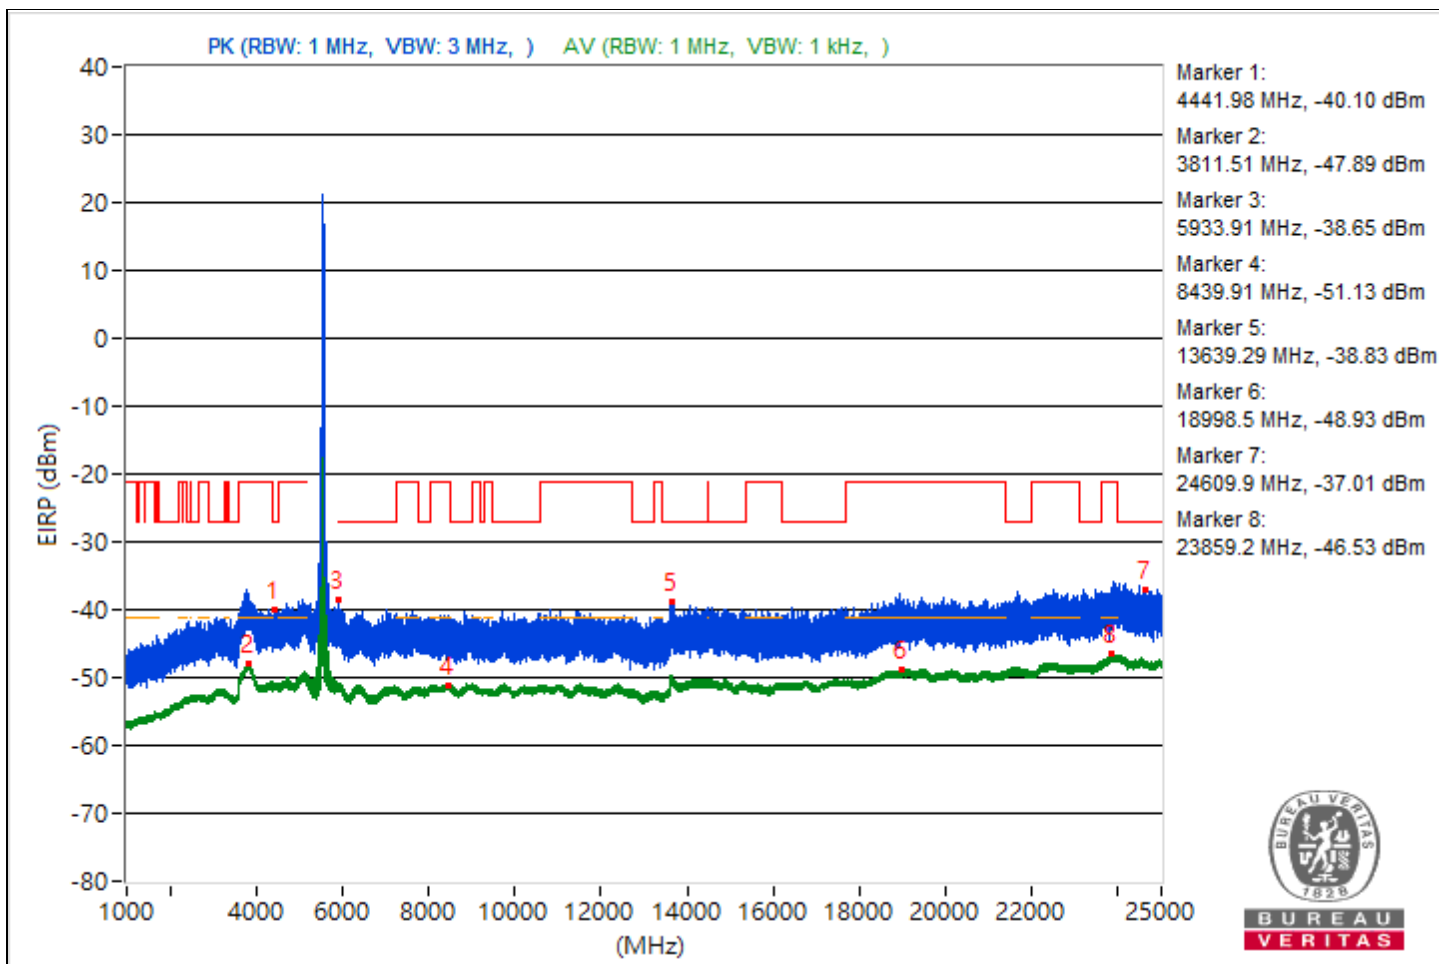

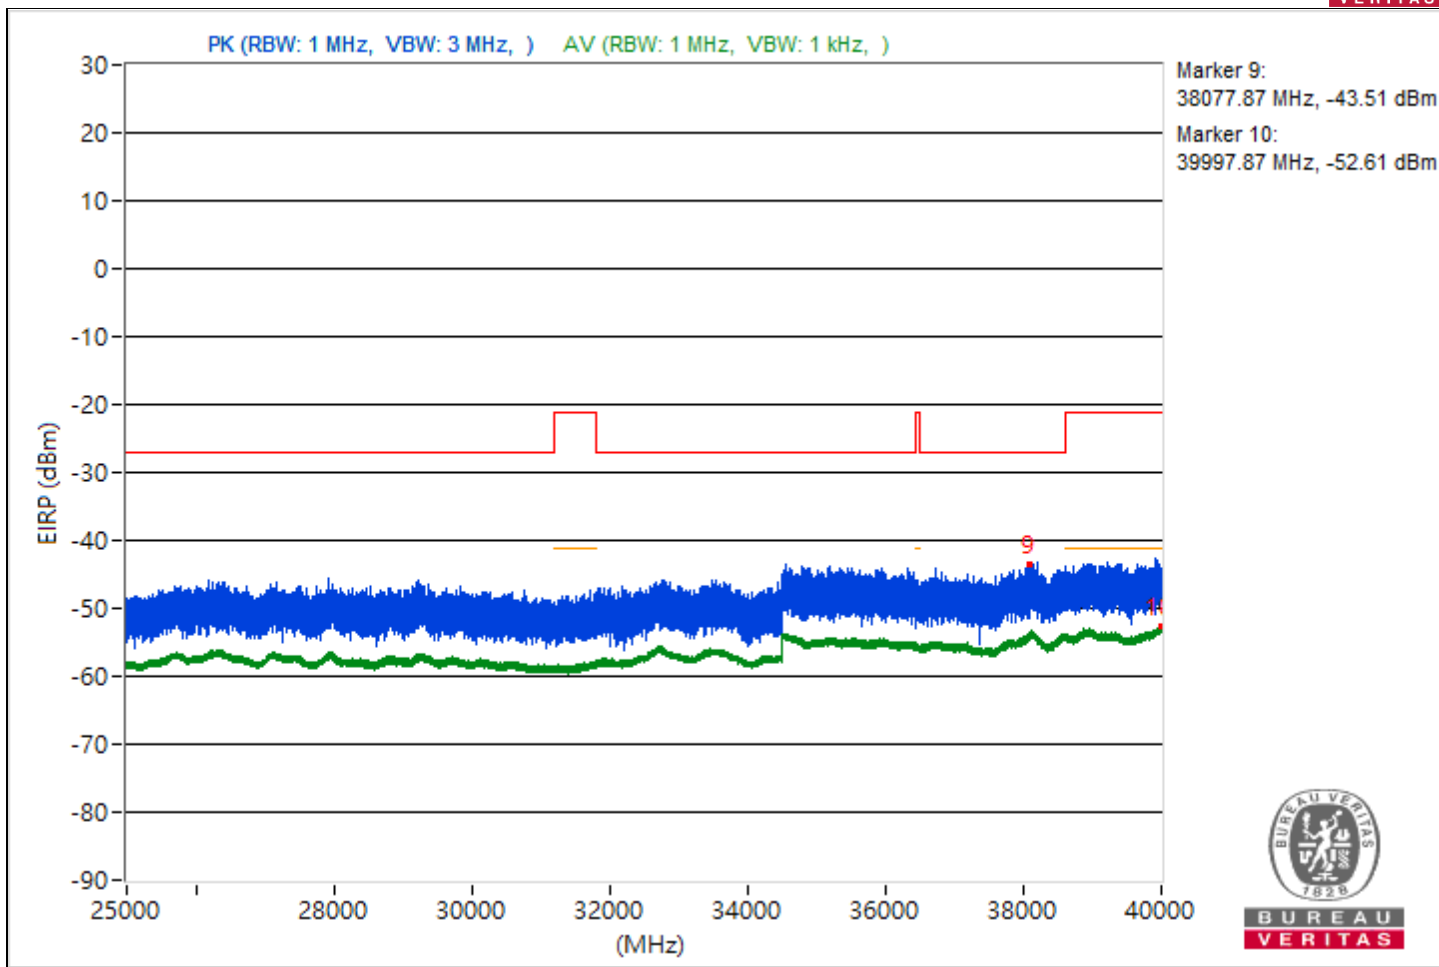



RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4433.11	54.66 PK	68.26	-13.6	-50.5	-47.18	4.92	-40.6
2	3802.64	47.06 AV	54	-6.94	-55.83	-56.46	4.92	-48.2
3	#6448.57	55.15 PK	68.26	-13.11	-51.38	-46.18	4.92	-40.11
4	9012.8	44.14 AV	54	-9.86	-59.57	-58.58	4.92	-51.12
5	#14466.04	55.92 PK	68.26	-12.34	-49.38	-45.85	4.92	-39.34
6	18997.8	46.01 AV	54	-7.99	-57.72	-56.71	4.92	-49.25
7	#24207.1	58.73 PK	68.26	-9.53	-47.69	-42.63	4.92	-36.53
8	23844.4	48.7 AV	54	-5.3	-54.8	-54.21	4.92	-46.56
9	#38079.64	53.26 PK	68.26	-15	-49.35	-50.6	4.92	-42
10	39964.53	42.4 AV	54	-11.6	-61.2	-60.42	4.92	-52.86

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

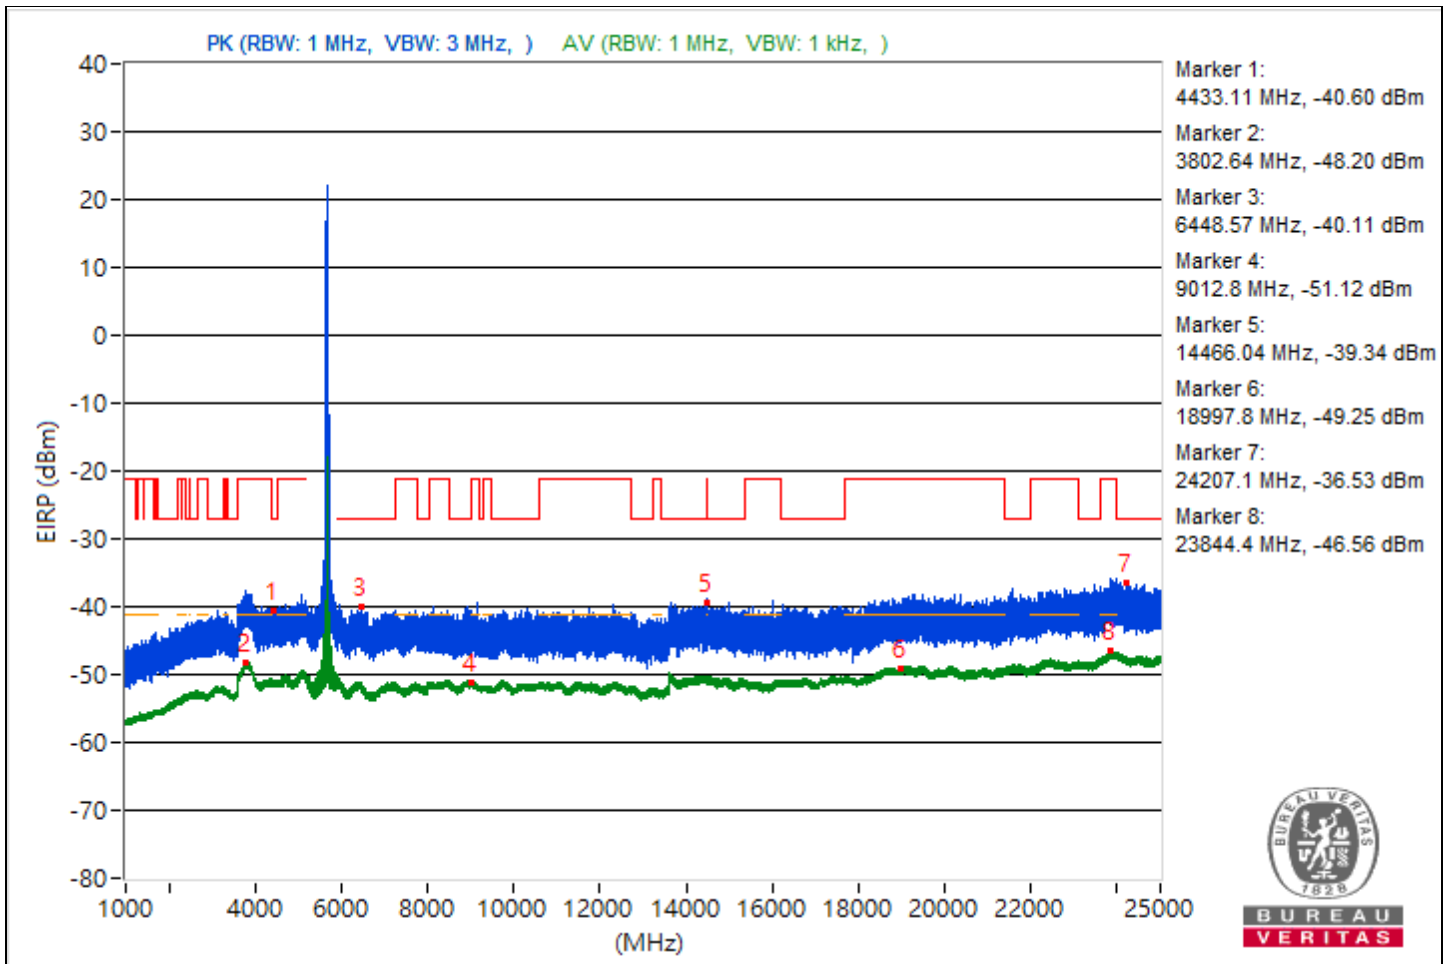

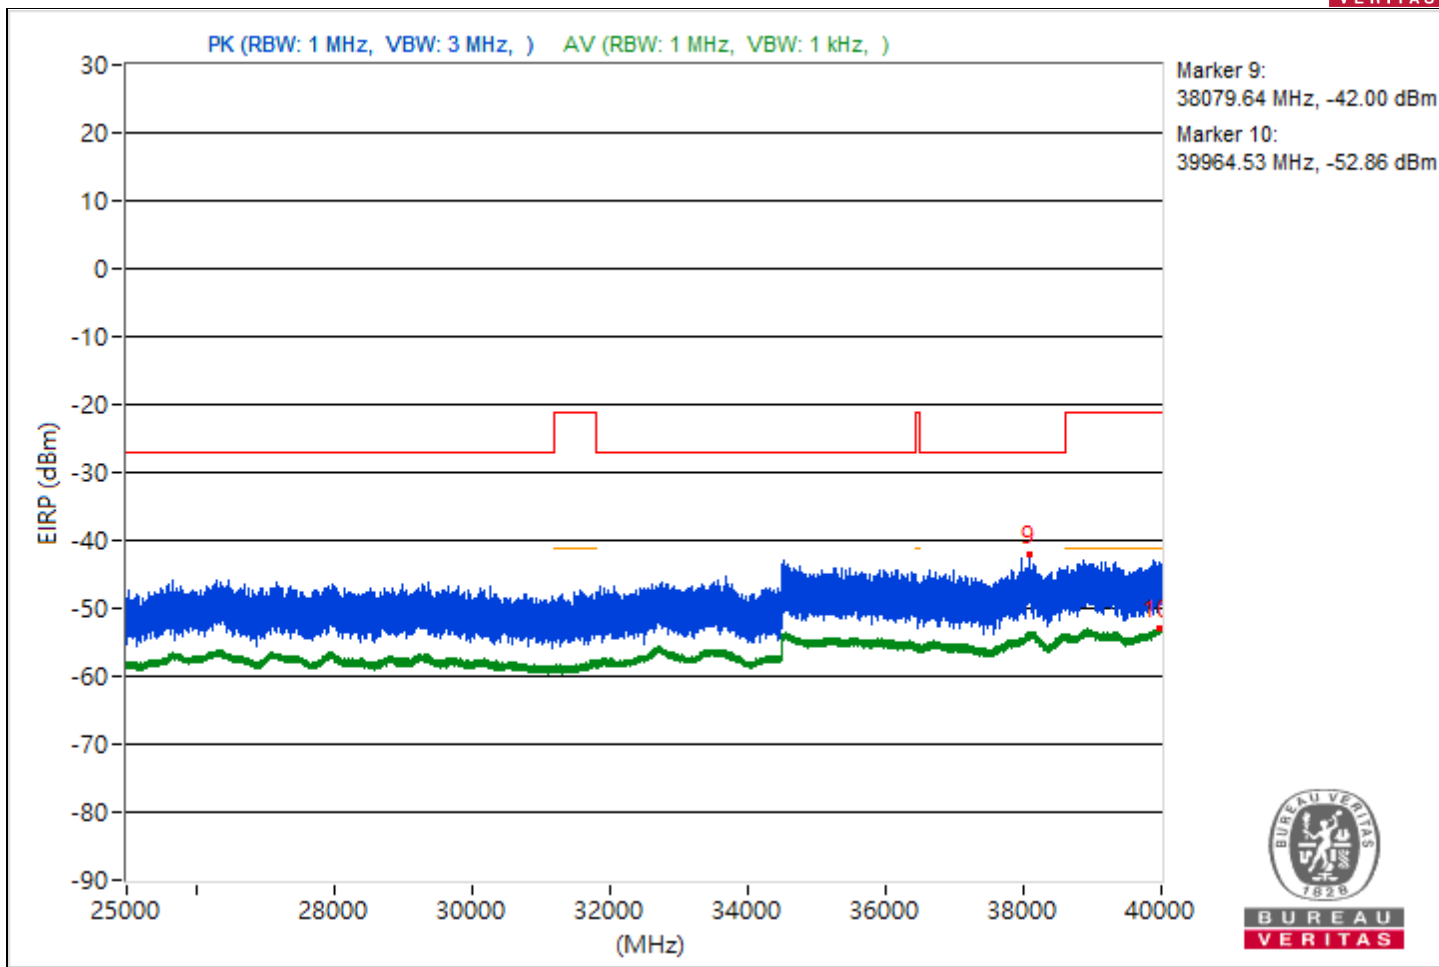





RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4415.53	55.22 PK	68.26	-13.04	-49.06	-47.1	4.92	-40.04
2	3821.23	47.14 AV	54	-6.86	-56.42	-55.71	4.92	-48.12
3	#9910.58	55.56 PK	68.26	-12.7	-51.1	-45.72	4.92	-39.7
4	9010.93	44.36 AV	54	-9.64	-59.23	-58.46	4.92	-50.9
5	#14548.27	56.74 PK	68.26	-11.52	-44.11	-51.88	4.92	-38.52
6	18985.4	46.23 AV	54	-7.77	-57.22	-56.72	4.92	-49.03
7	#24446.5	58.04 PK	68.26	-10.22	-48.97	-43.14	4.92	-37.22
8	23890	48.61 AV	54	-5.39	-54.99	-54.21	4.92	-46.65
9	#38079.91	52.12 PK	68.26	-16.14	-54.21	-49.27	4.92	-43.14
10	39993.07	42.46 AV	54	-11.54	-60.99	-60.48	4.92	-52.8

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

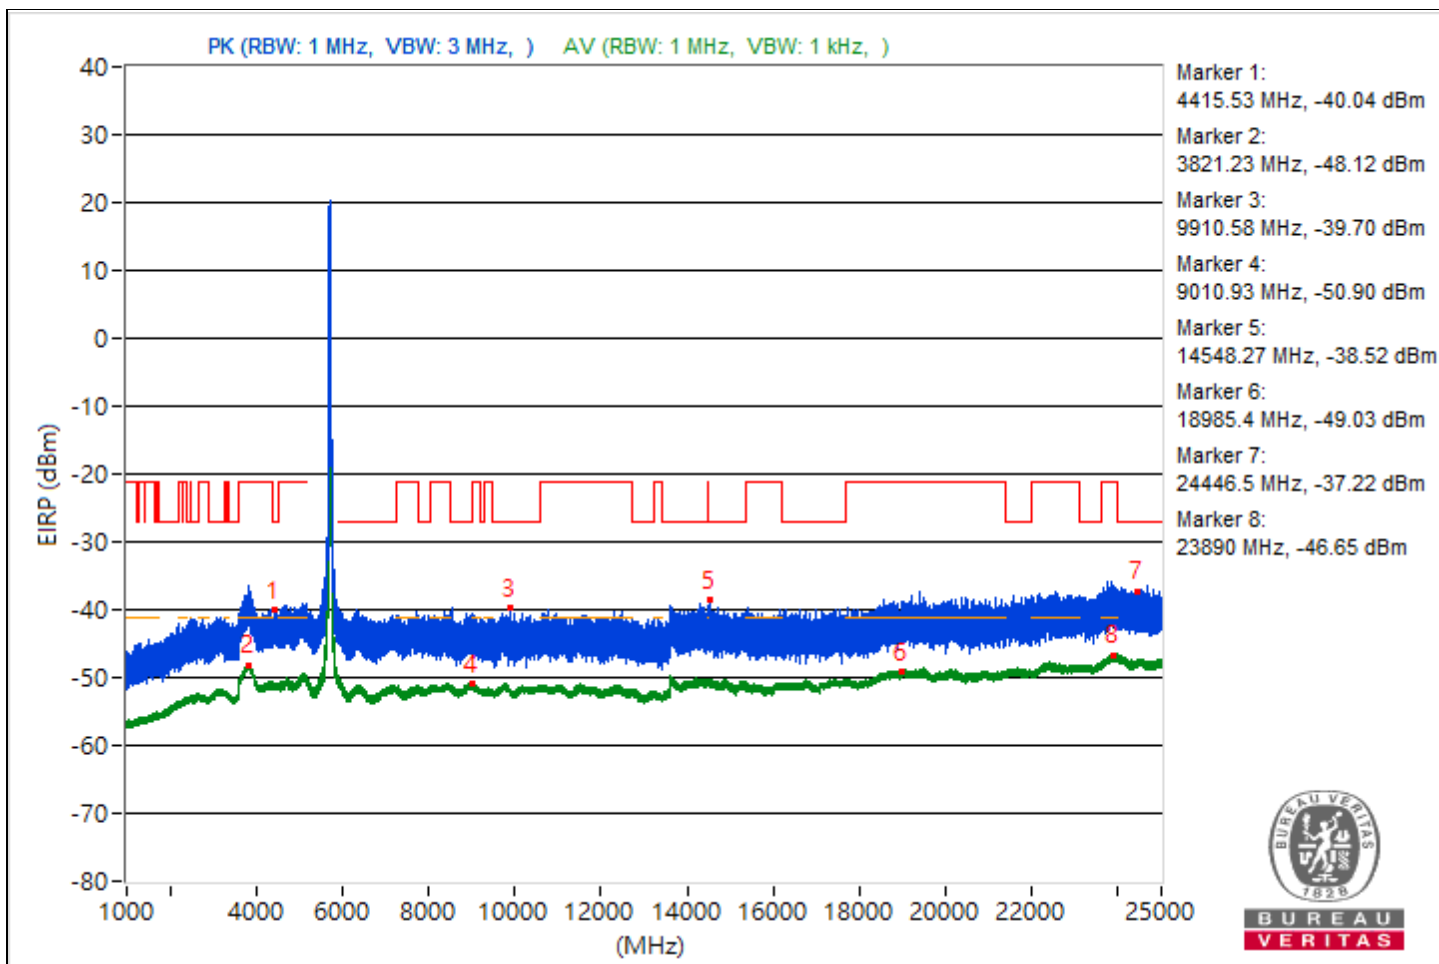

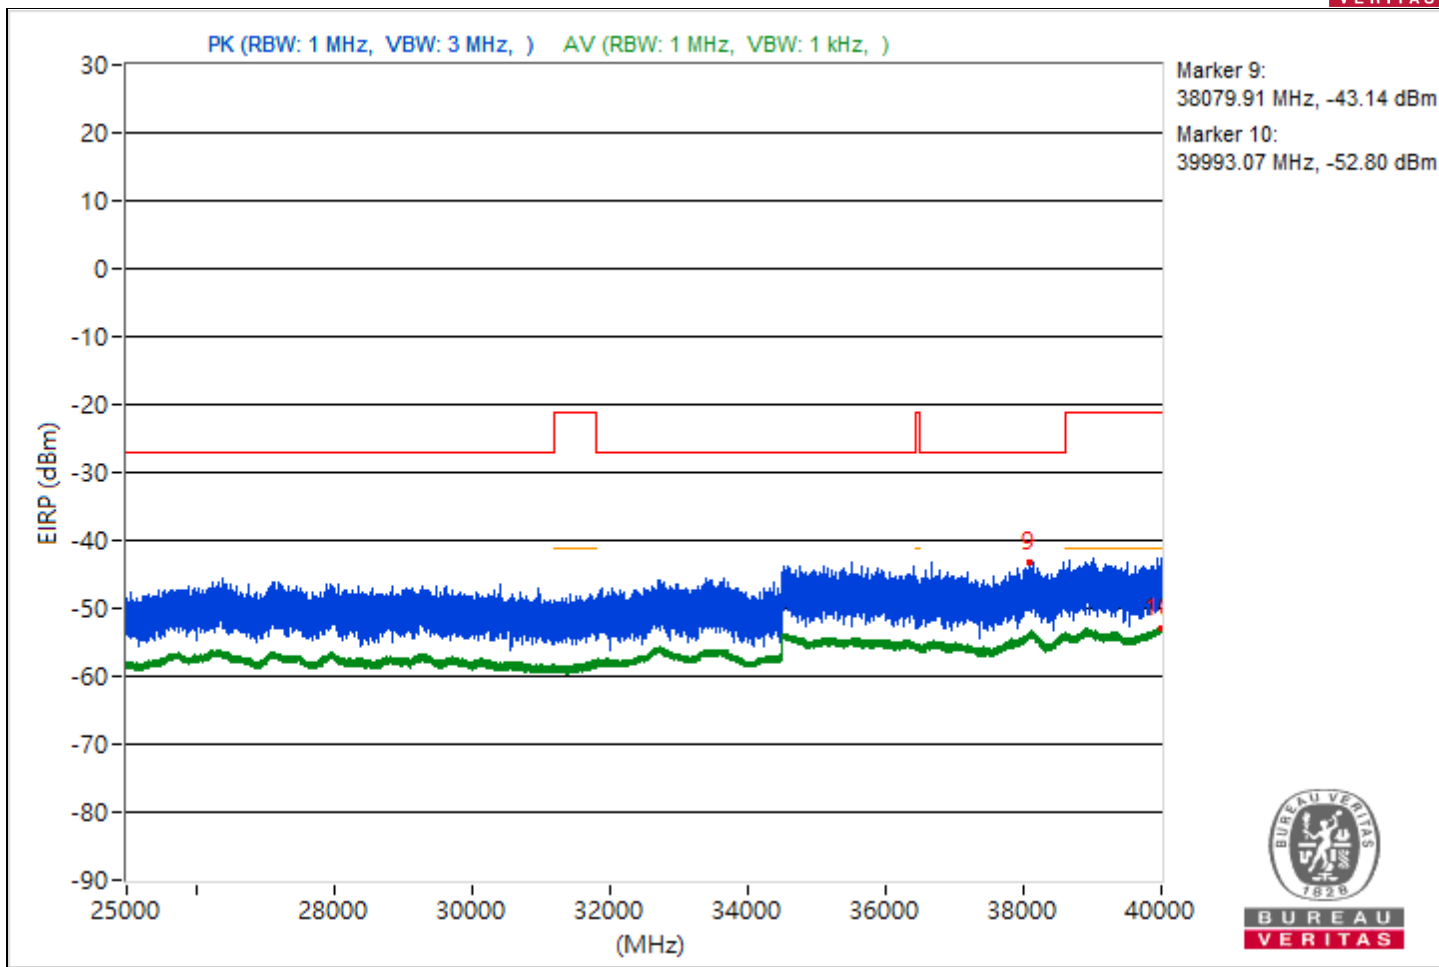



RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4462.2	55.18 PK	68.26	-13.08	-47.08	-49.2	4.92	-40.08
2	3801.63	47.02 AV	54	-6.98	-56.58	-55.79	4.92	-48.24
3	#5911.04	62.84 PK	68.26	-5.42	-38.8	-42.79	4.92	-32.42
4	11514.84	44.83 AV	54	-9.17	-59.01	-57.79	4.92	-50.43
5	#13620.44	55.71 PK	68.26	-12.55	-45.6	-50.89	4.92	-39.55
6	18769.4	46.16 AV	54	-7.84	-56.49	-57.65	4.92	-49.1
7	#24929.8	58.61 PK	68.26	-9.65	-42.08	-51.08	4.92	-36.65
8	23987.7	48.71 AV	54	-5.29	-54.62	-54.35	4.92	-46.55
9	#38095.64	52.53 PK	68.26	-15.73	-55.03	-48.53	4.92	-42.73
10	39999.11	42.55 AV	54	-11.45	-61.08	-60.24	4.92	-52.71

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

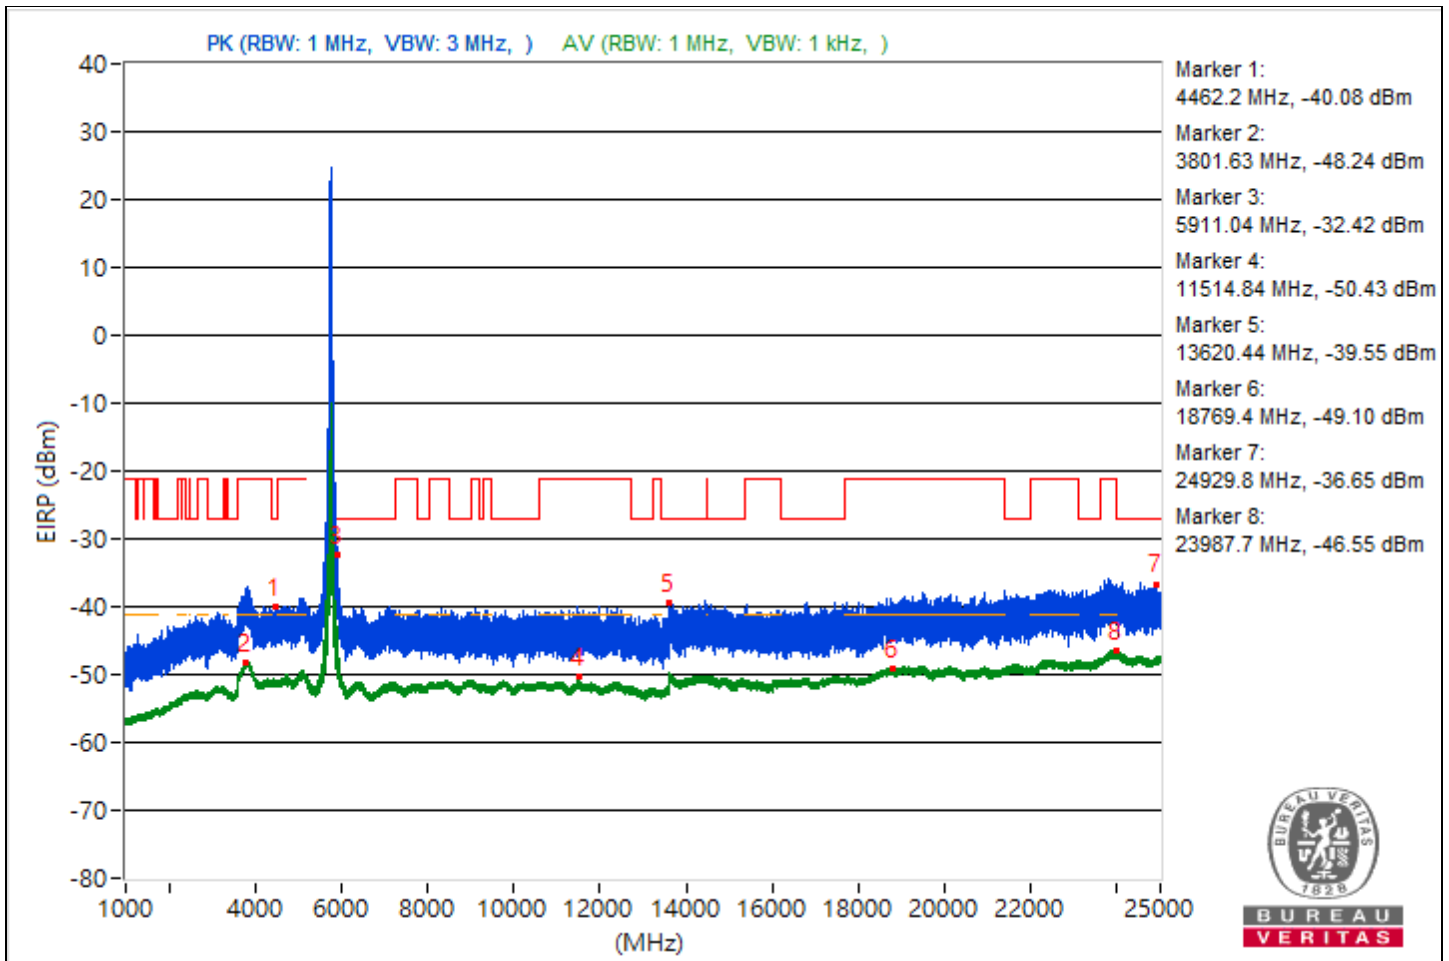

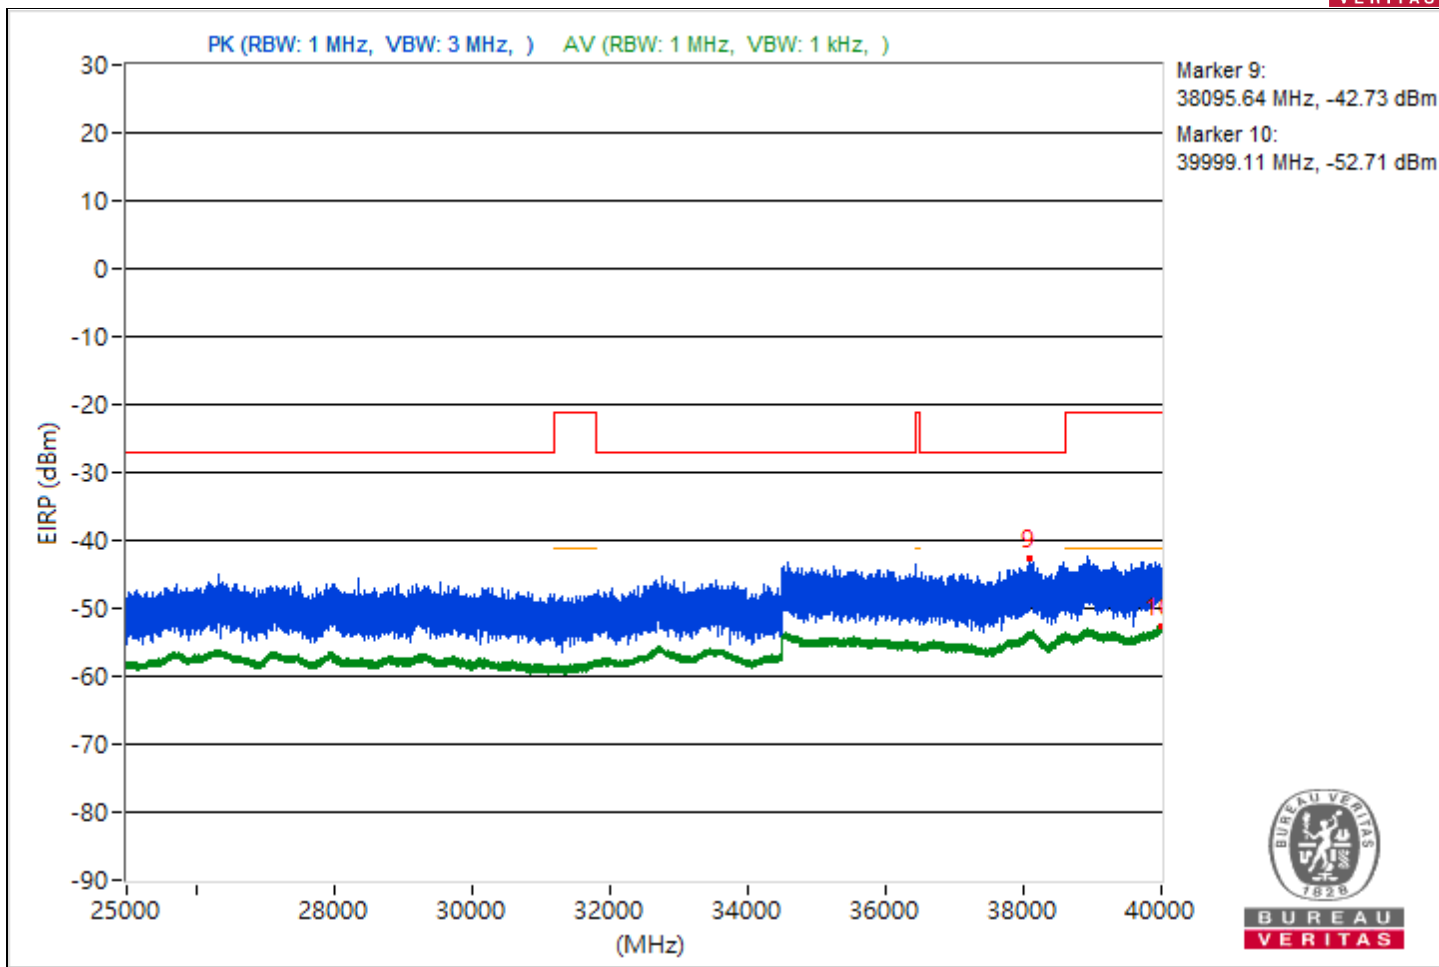



RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3107.93	54.76 PK	68.26	-13.5	-52.08	-46.47	4.92	-40.5
2	3807.93	47.1 AV	54	-6.9	-55.74	-56.48	4.92	-48.16
3	#5901.48	67.06 PK	68.26	-1.2	-34.48	-38.82	4.92	-28.2
4	11581.87	44.27 AV	54	-9.73	-59.89	-58.13	4.92	-50.99
5	#17292.6	55.57 PK	68.26	-12.69	-51.55	-45.59	4.92	-39.69
6	18672.8	46.17 AV	54	-7.83	-57.27	-56.78	4.92	-49.09
7	#24035.1	58.32 PK	68.26	-9.94	-42.94	-48.44	4.92	-36.94
8	23873.3	48.77 AV	54	-5.23	-54.12	-54.74	4.92	-46.49
9	#35050.22	51.92 PK	68.26	-16.34	-50.03	-53	4.92	-43.34
10	39992.8	42.89 AV	54	-11.11	-60.57	-60.05	4.92	-52.37

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

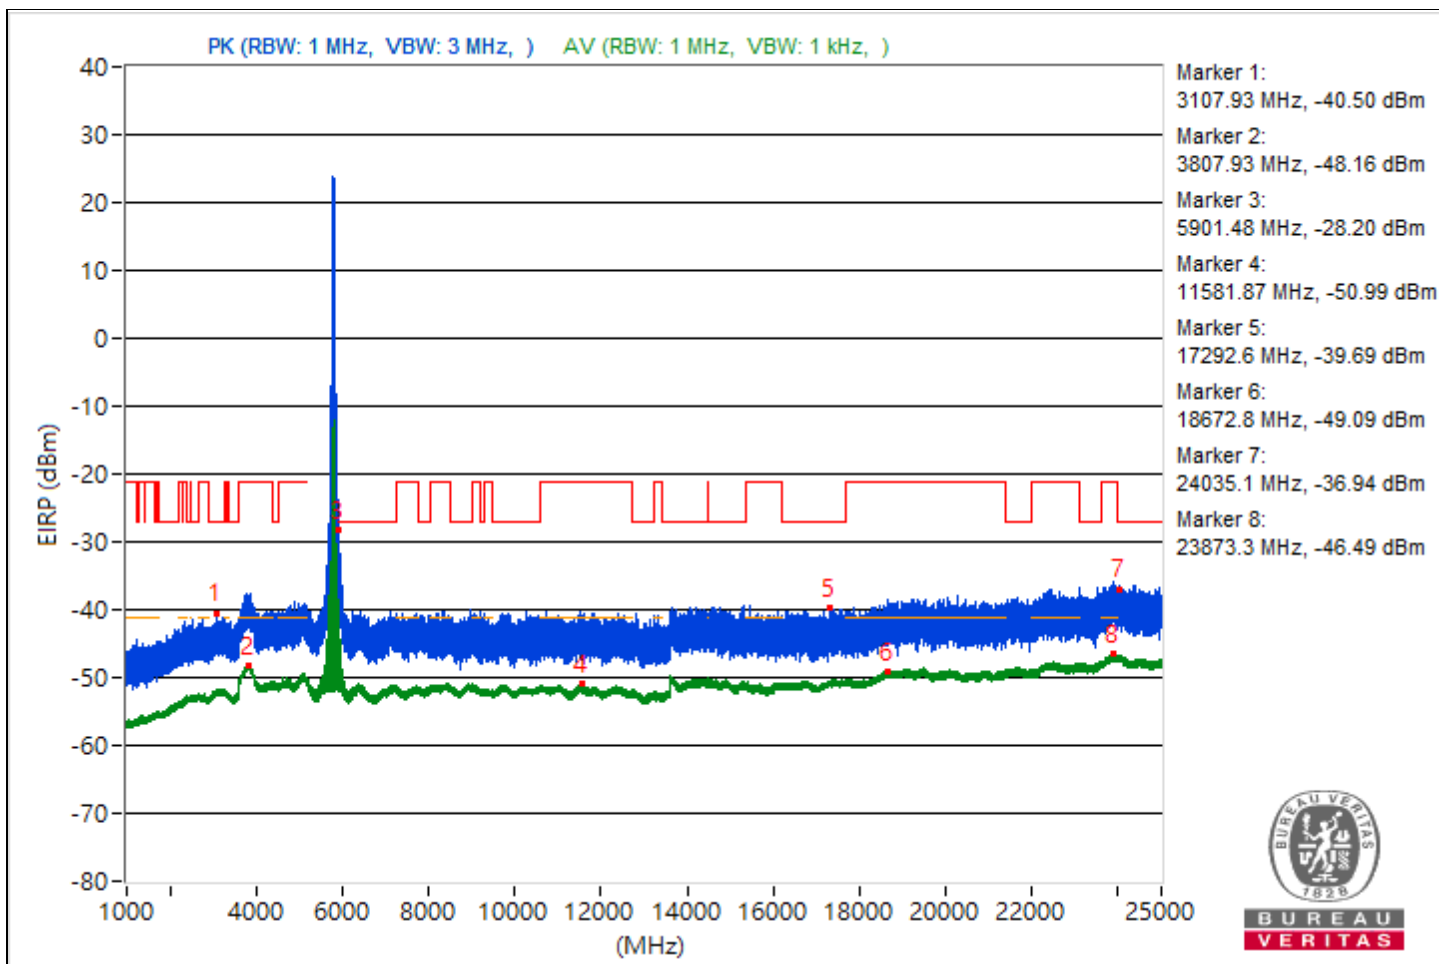

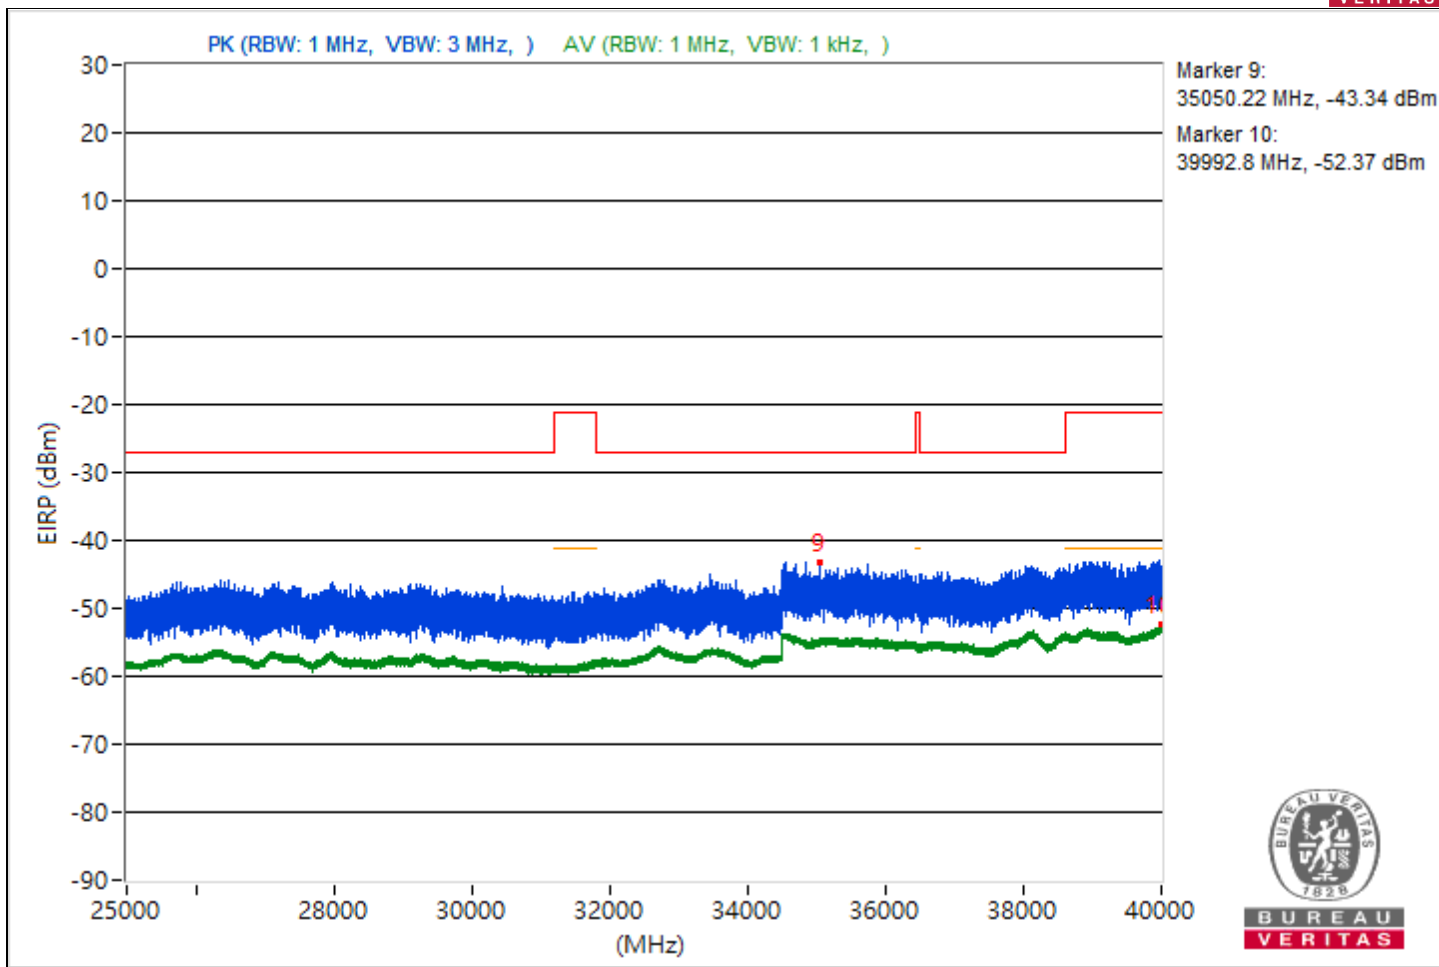



RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4415.84	56.23 PK	68.26	-12.03	-45.61	-48.94	4.92	-39.03
2	5095.23	47.46 AV	54	-6.54	-56.17	-55.33	4.92	-47.8
3	#10533.6	55.02 PK	68.26	-13.24	-50.53	-46.65	4.92	-40.24
4	12335.02	44.35 AV	54	-9.65	-59.38	-58.36	4.92	-50.91
5	#14109.24	55.59 PK	68.26	-12.67	-45.39	-52.28	4.92	-39.67
6	18988.6	46.19 AV	54	-7.81	-57.23	-56.79	4.92	-49.07
7	#24016.1	58.77 PK	68.26	-9.49	-42.27	-48.87	4.92	-36.49
8	23912.7	48.71 AV	54	-5.29	-54.27	-54.69	4.92	-46.55
9	#38064.89	52.22 PK	68.26	-16.04	-48.93	-54.98	4.92	-43.04
10	39990.76	42.48 AV	54	-11.52	-60.46	-60.98	4.92	-52.78

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

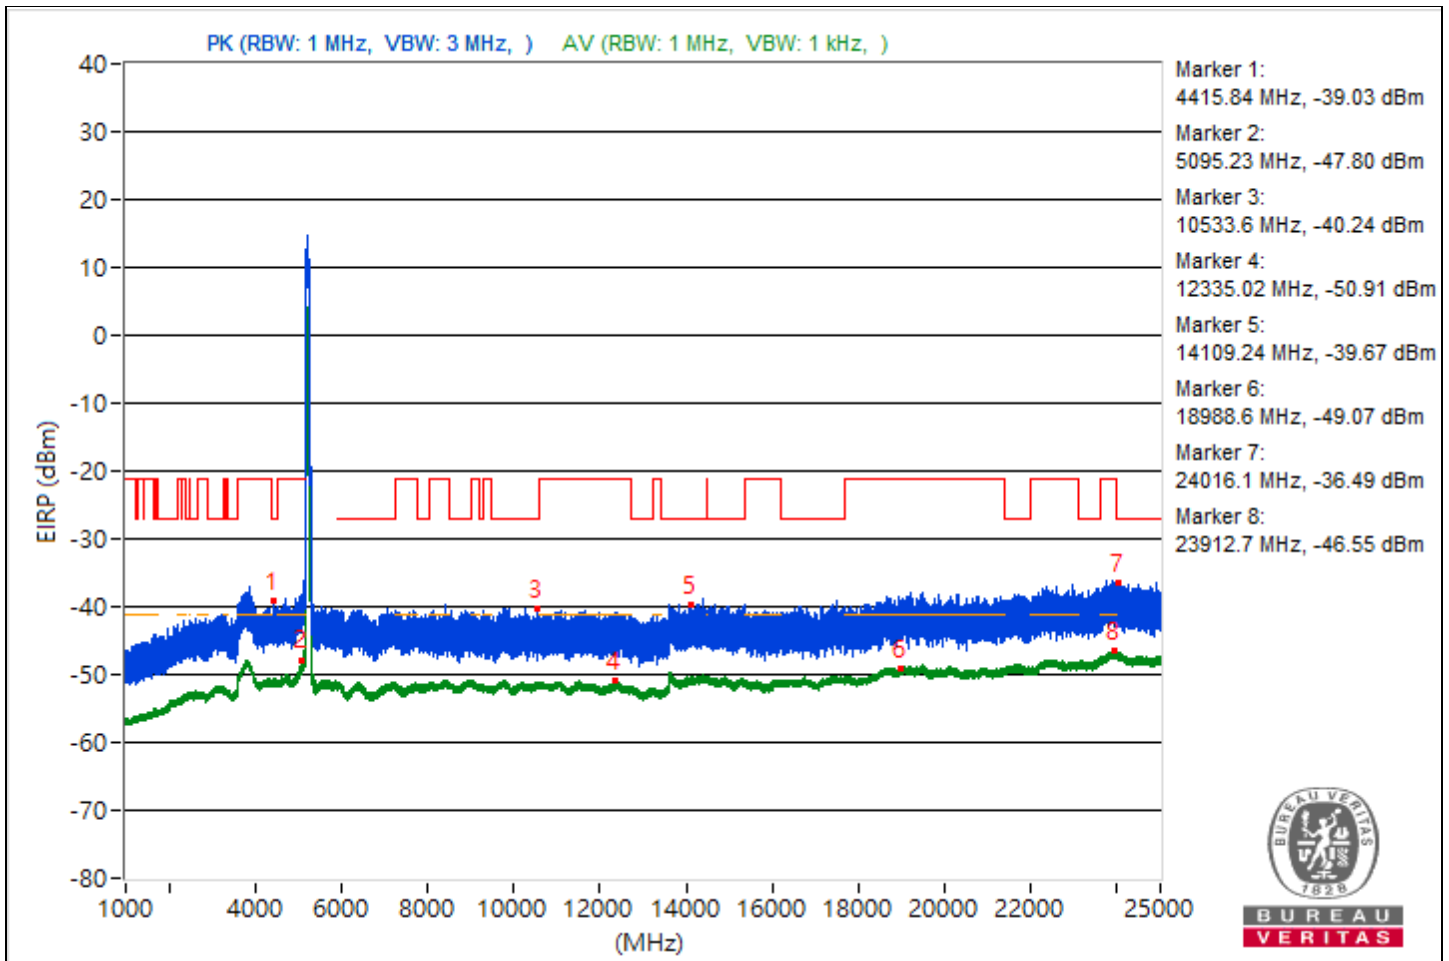

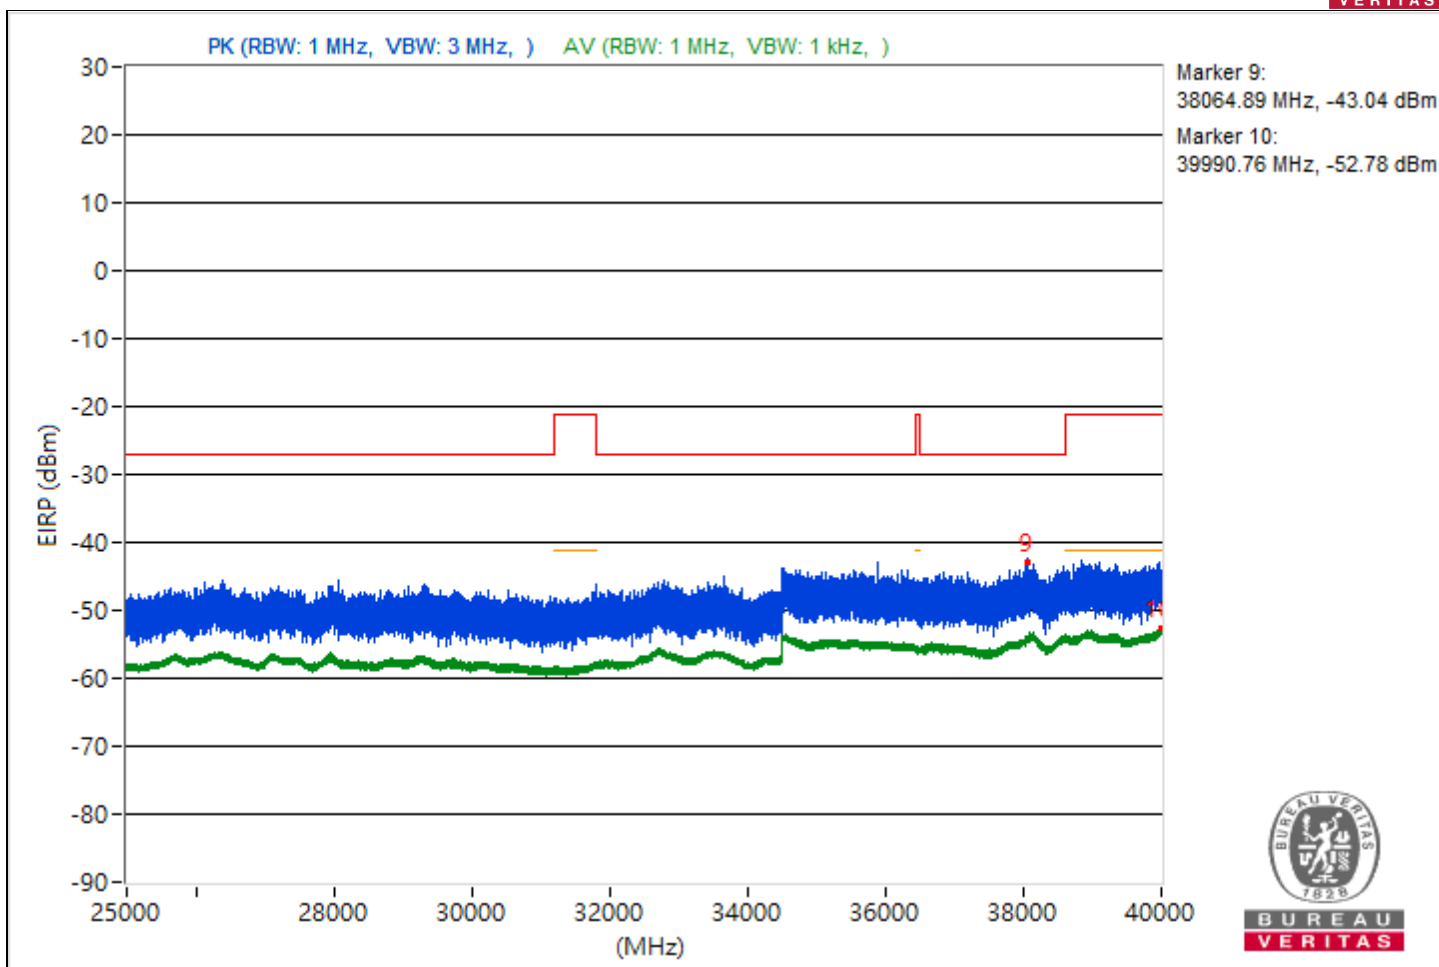





RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4492.84	55.18 PK	68.26	-13.08	-50	-46.65	4.92	-40.08
2	3824.73	47.12 AV	54	-6.88	-56.4	-55.77	4.92	-48.14
3	#7193.06	54.95 PK	68.26	-13.31	-46.22	-52.13	4.92	-40.31
4	8464.53	44.19 AV	54	-9.81	-58.81	-59.2	4.92	-51.07
5	#14366.22	56.58 PK	68.26	-11.68	-52.22	-44.24	4.92	-38.68
6	18993.3	46.26 AV	54	-7.74	-56.71	-57.15	4.92	-49
7	#24777.8	59.03 PK	68.26	-9.23	-48.15	-42.12	4.92	-36.23
8	23823.3	48.77 AV	54	-5.23	-54.16	-54.69	4.92	-46.49
9	#38162.49	52.01 PK	68.26	-16.25	-49.3	-54.58	4.92	-43.25
10	39997.51	42.71 AV	54	-11.29	-59.96	-61.08	4.92	-52.55

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

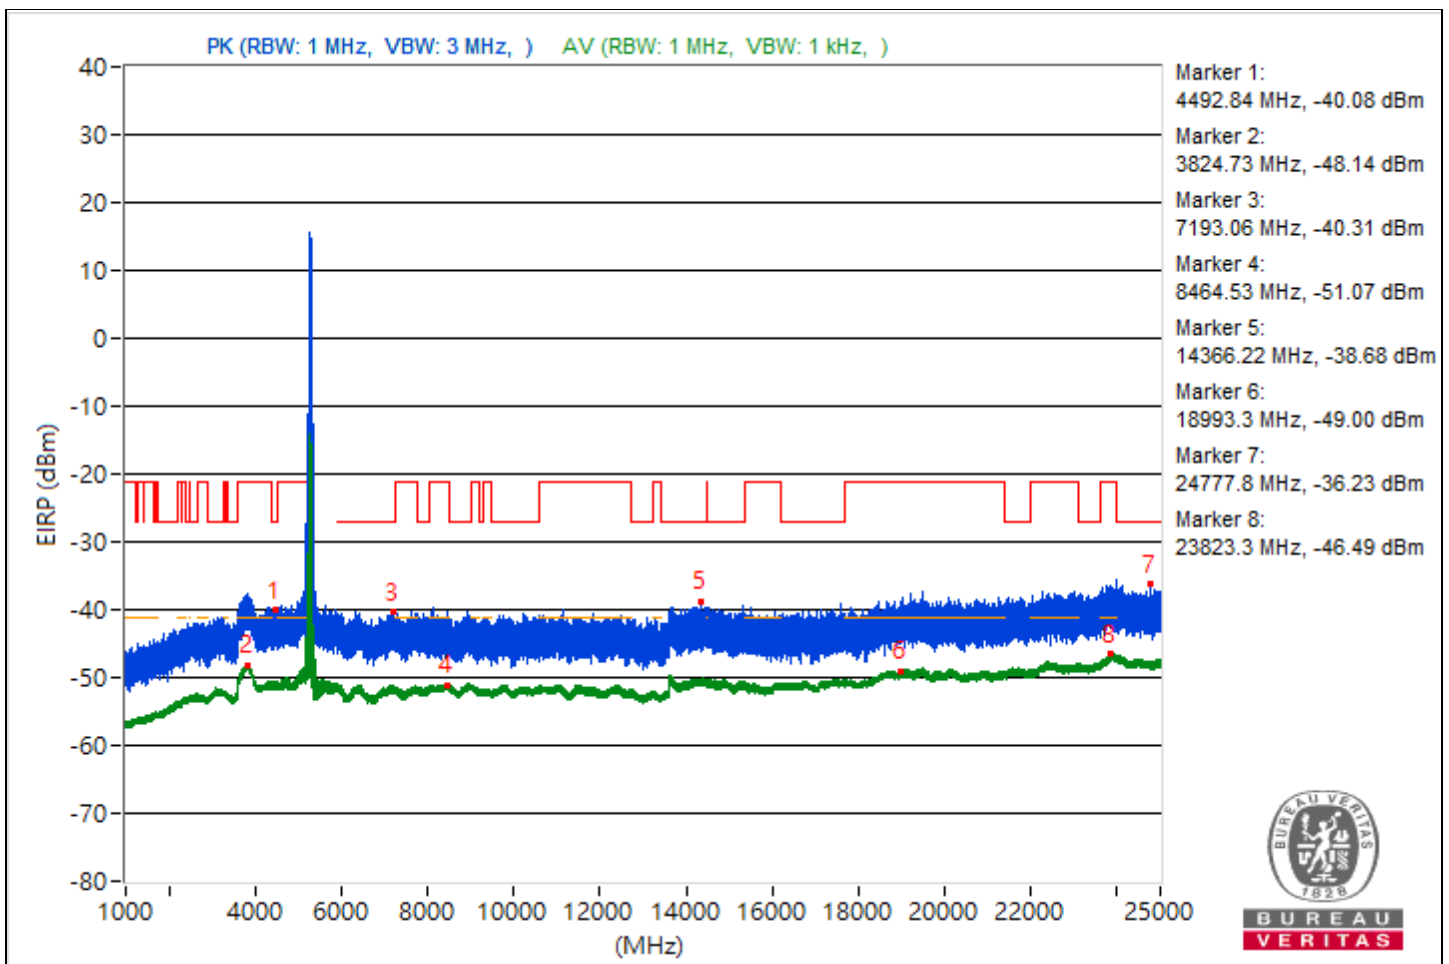

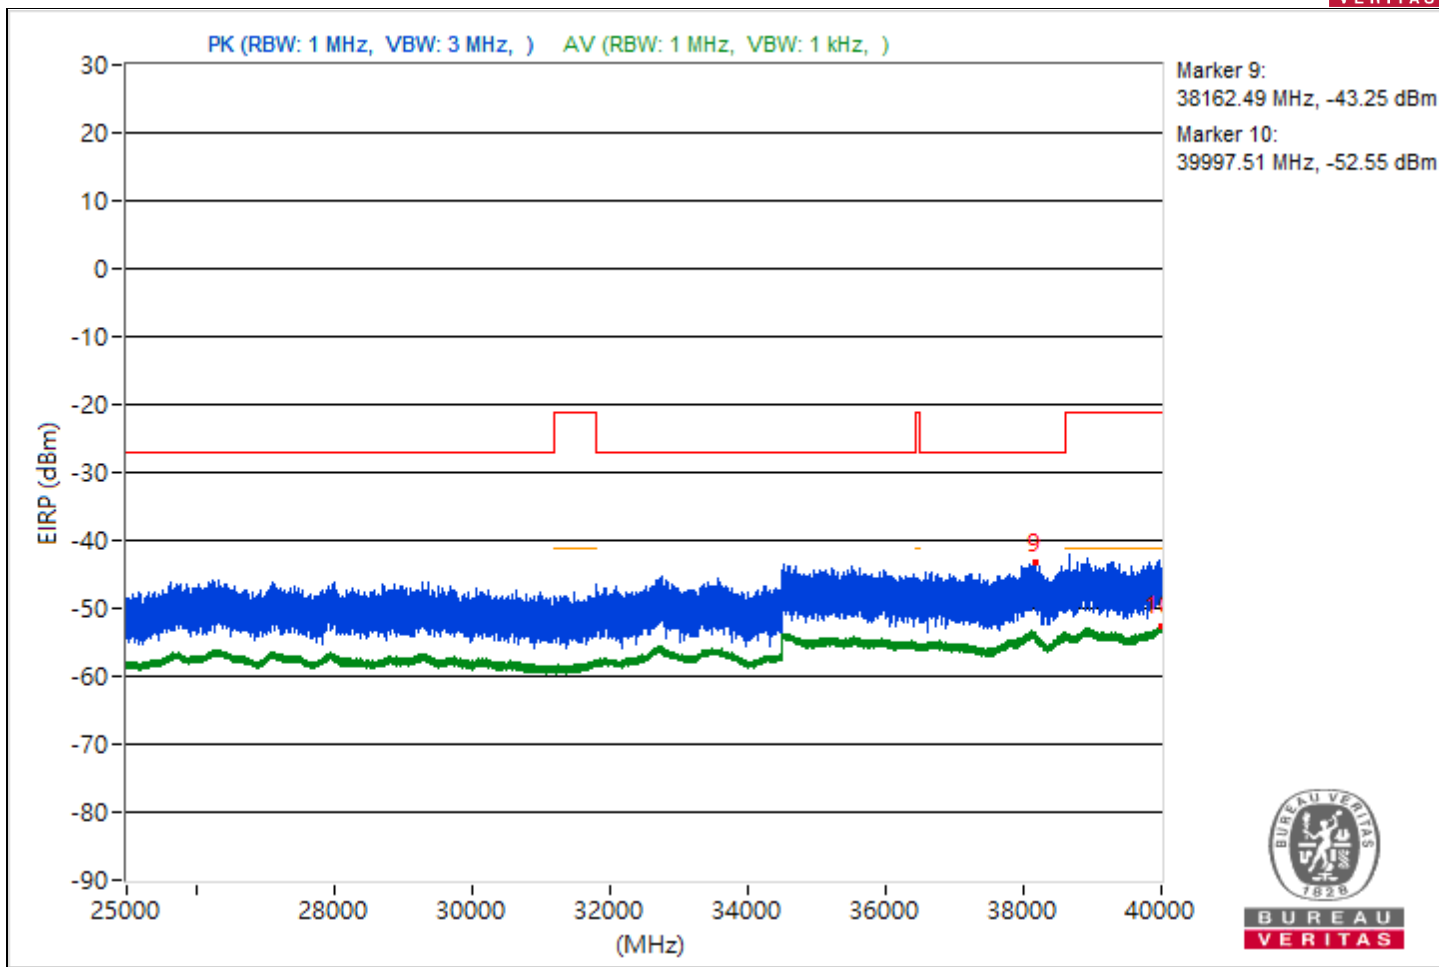



RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4445.48	55.4 PK	68.26	-12.86	-48.54	-47.15	4.92	-39.86
2	3818.9	47.1 AV	54	-6.9	-55.63	-56.61	4.92	-48.16
3	#6434.96	55.02 PK	68.26	-13.24	-46.42	-51.15	4.92	-40.24
4	9025.69	44.12 AV	54	-9.88	-58.68	-59.5	4.92	-51.14
5	#14257.78	55.54 PK	68.26	-12.72	-45.82	-50.87	4.92	-39.72
6	18773.3	46.23 AV	54	-7.77	-56.56	-57.41	4.92	-49.03
7	#24455.2	58.81 PK	68.26	-9.45	-45.83	-43.3	4.92	-36.45
8	23823.6	48.81 AV	54	-5.19	-54.09	-54.69	4.92	-46.45
9	#38570.49	52.4 PK	68.26	-15.86	-49.31	-53.04	4.92	-42.86
10	39999.91	42.57 AV	54	-11.43	-60.45	-60.8	4.92	-52.69

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

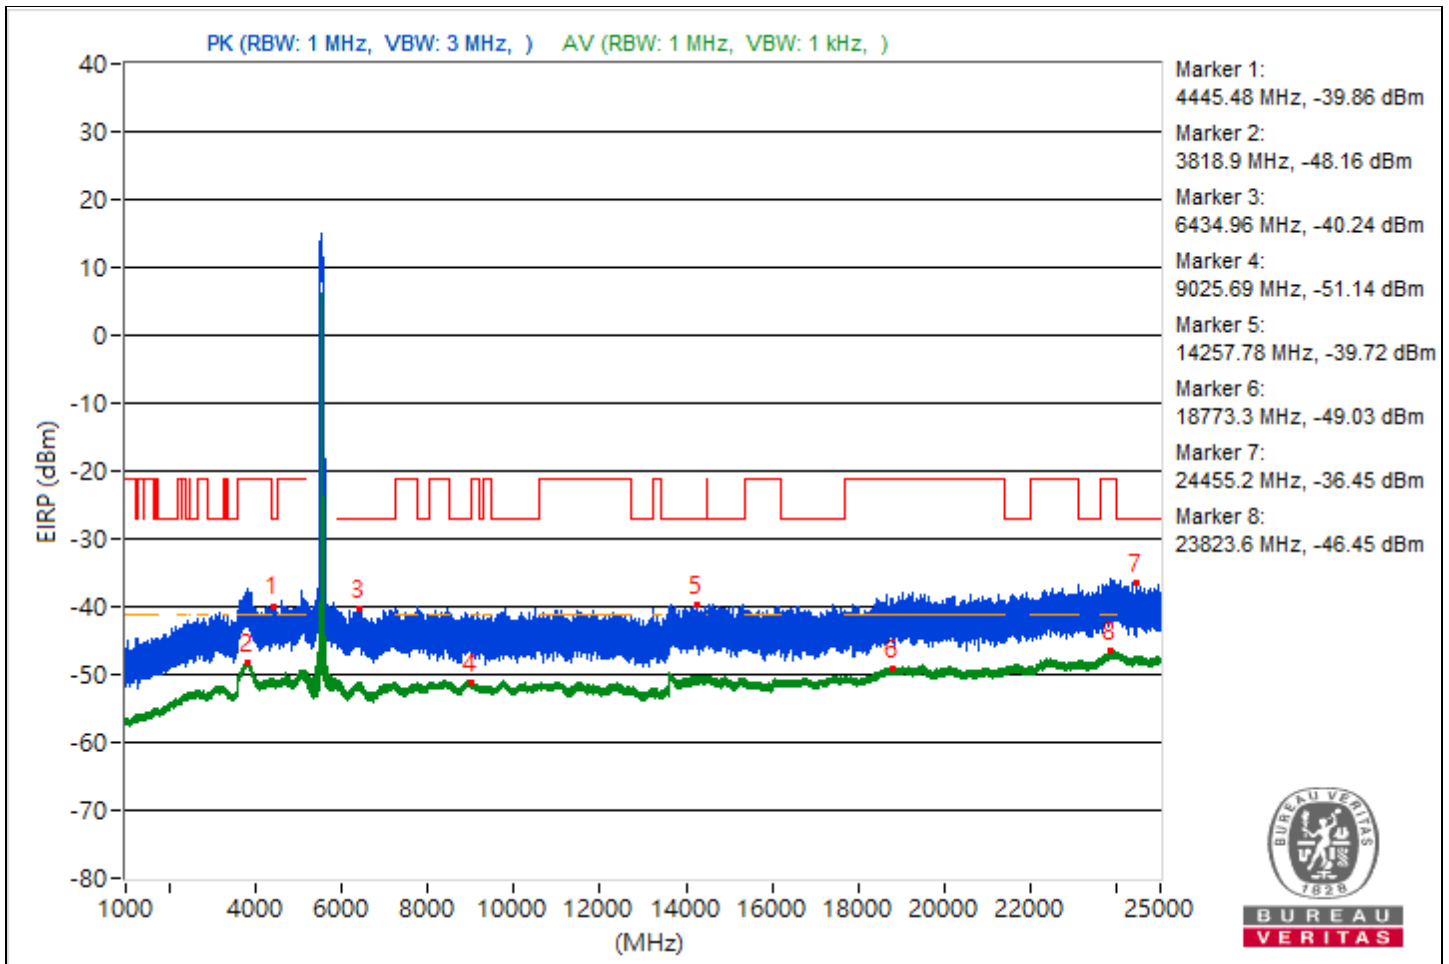

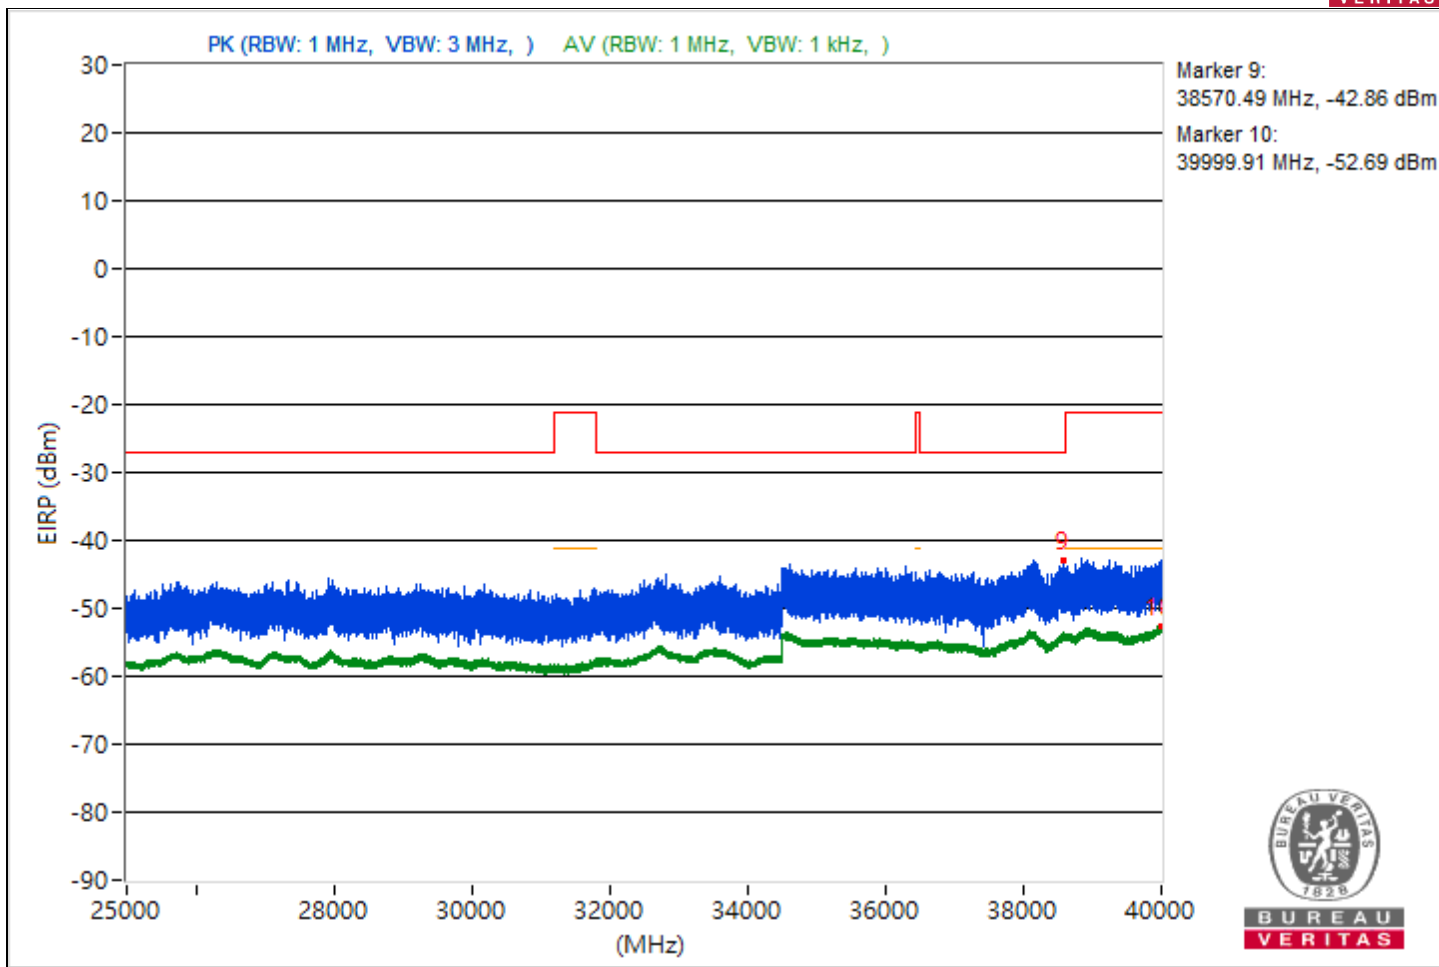



RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4487.01	56.03 PK	68.26	-12.23	-46.05	-48.67	4.92	-39.23
2	3795.64	47.28 AV	54	-6.72	-56.15	-55.69	4.92	-47.98
3	#9767.73	55.26 PK	68.26	-13	-45.44	-54.42	4.92	-40
4	8367.73	44.22 AV	54	-9.78	-58.58	-59.39	4.92	-51.04
5	#17696.4	55.64 PK	68.26	-12.62	-45.53	-51.44	4.92	-39.62
6	18988.6	46.38 AV	54	-7.62	-56.88	-56.74	4.92	-48.88
7	#24144.7	58.61 PK	68.26	-9.65	-46.89	-43.08	4.92	-36.65
8	23874.9	48.64 AV	54	-5.36	-55.04	-54.11	4.92	-46.62
9	#34919.29	51.96 PK	68.26	-16.3	-54.18	-49.49	4.92	-43.3
10	39981.69	42.64 AV	54	-11.36	-60.85	-60.27	4.92	-52.62

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

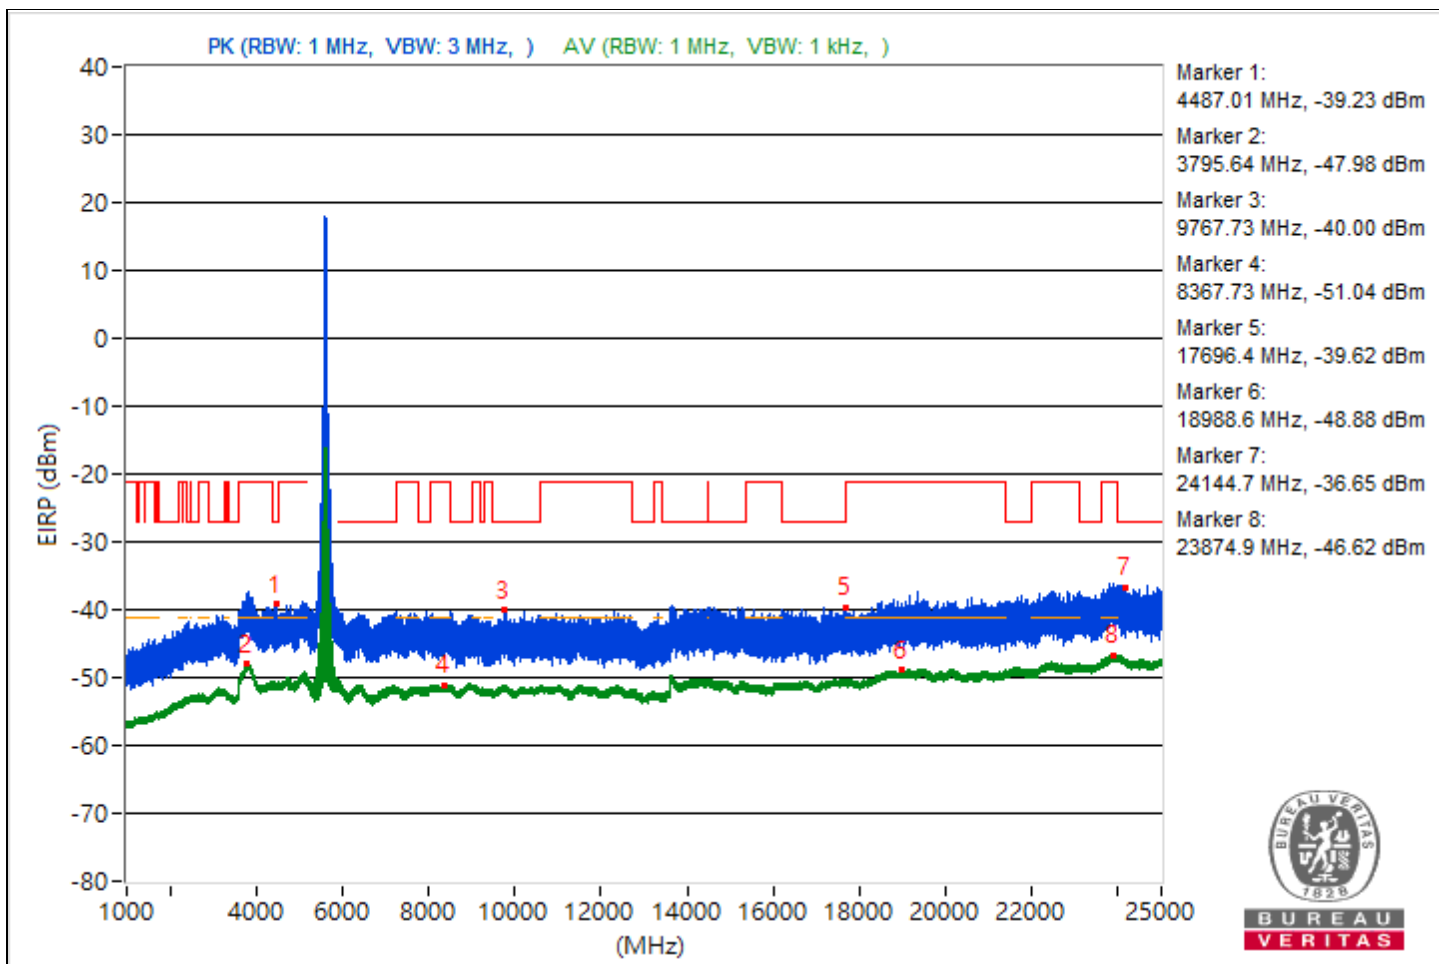

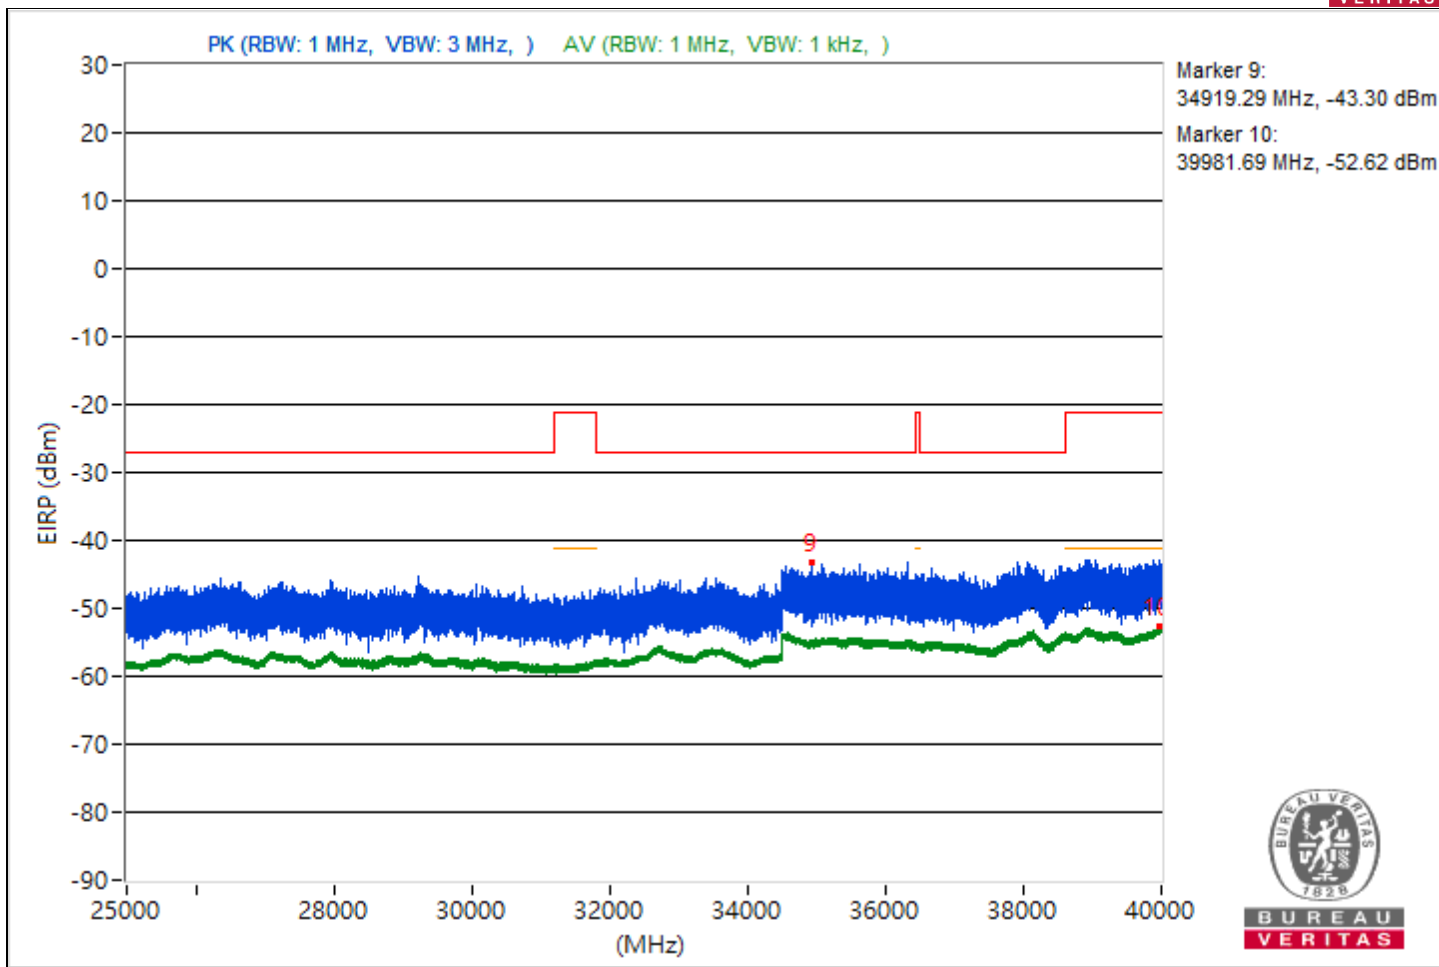



RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4492.61	55.18 PK	68.26	-13.08	-46.52	-50.31	4.92	-40.08
2	3804.67	47.34 AV	54	-6.66	-55.78	-55.92	4.92	-47.92
3	#5925.9	55.1 PK	68.26	-13.16	-51.28	-46.27	4.92	-40.16
4	8394.31	44.13 AV	54	-9.87	-59.42	-58.73	4.92	-51.13
5	#13613.24	55.84 PK	68.26	-12.42	-50.72	-45.47	4.92	-39.42
6	18690.8	46.2 AV	54	-7.8	-56.63	-57.39	4.92	-49.06
7	#24652.4	58.73 PK	68.26	-9.53	-47.15	-42.82	4.92	-36.53
8	23889.7	48.69 AV	54	-5.31	-54.83	-54.19	4.92	-46.57
9	#37048.89	52.33 PK	68.26	-15.93	-54.22	-48.99	4.92	-42.93
10	39997.24	42.61 AV	54	-11.39	-60.14	-61.07	4.92	-52.65

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

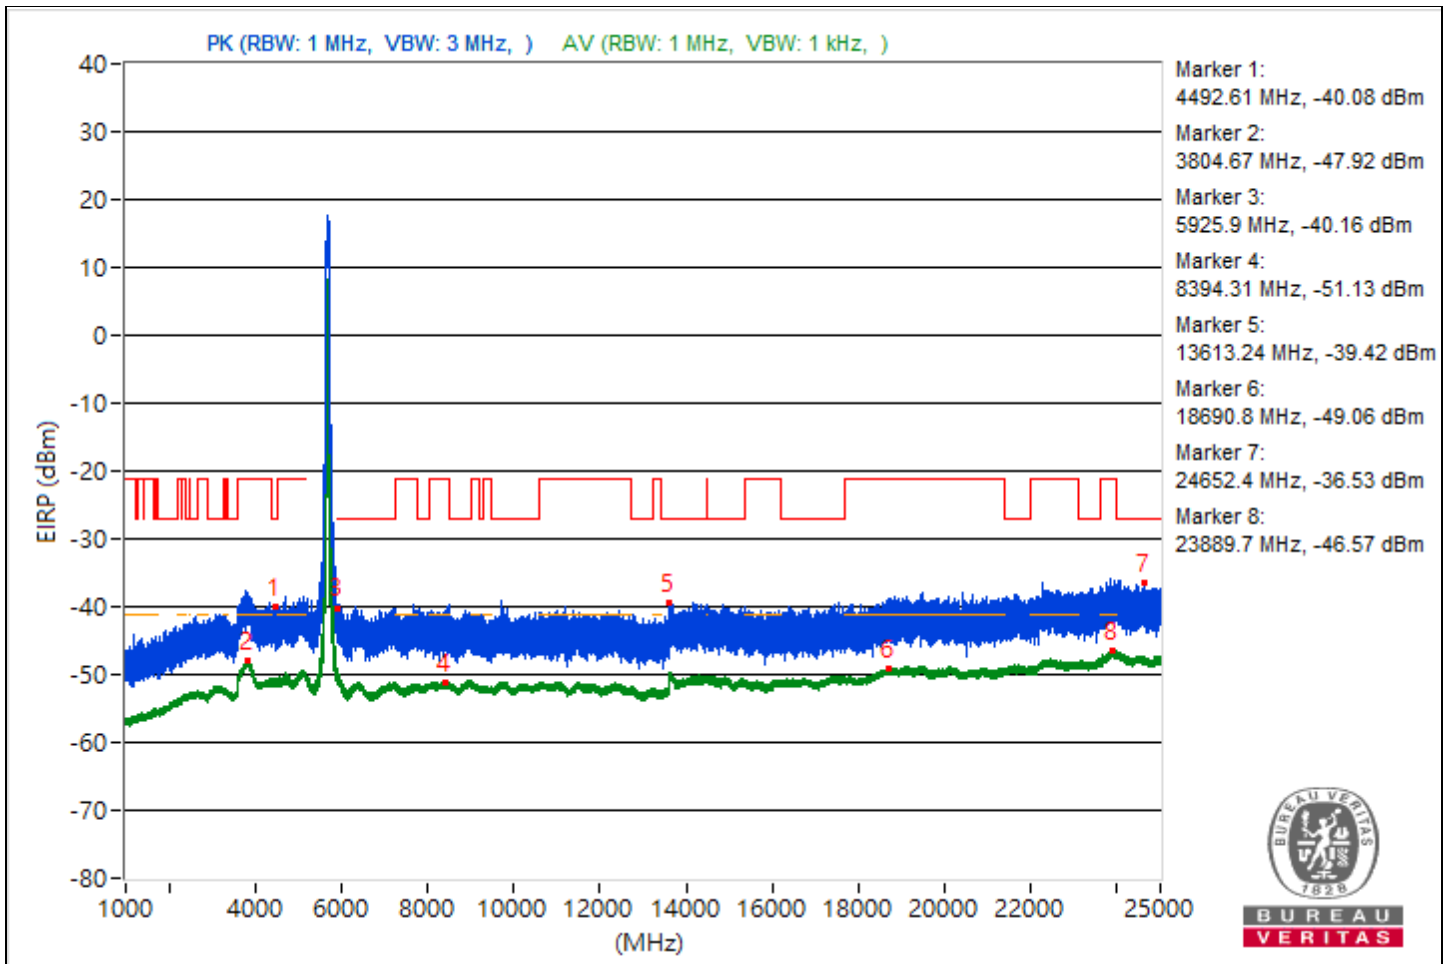

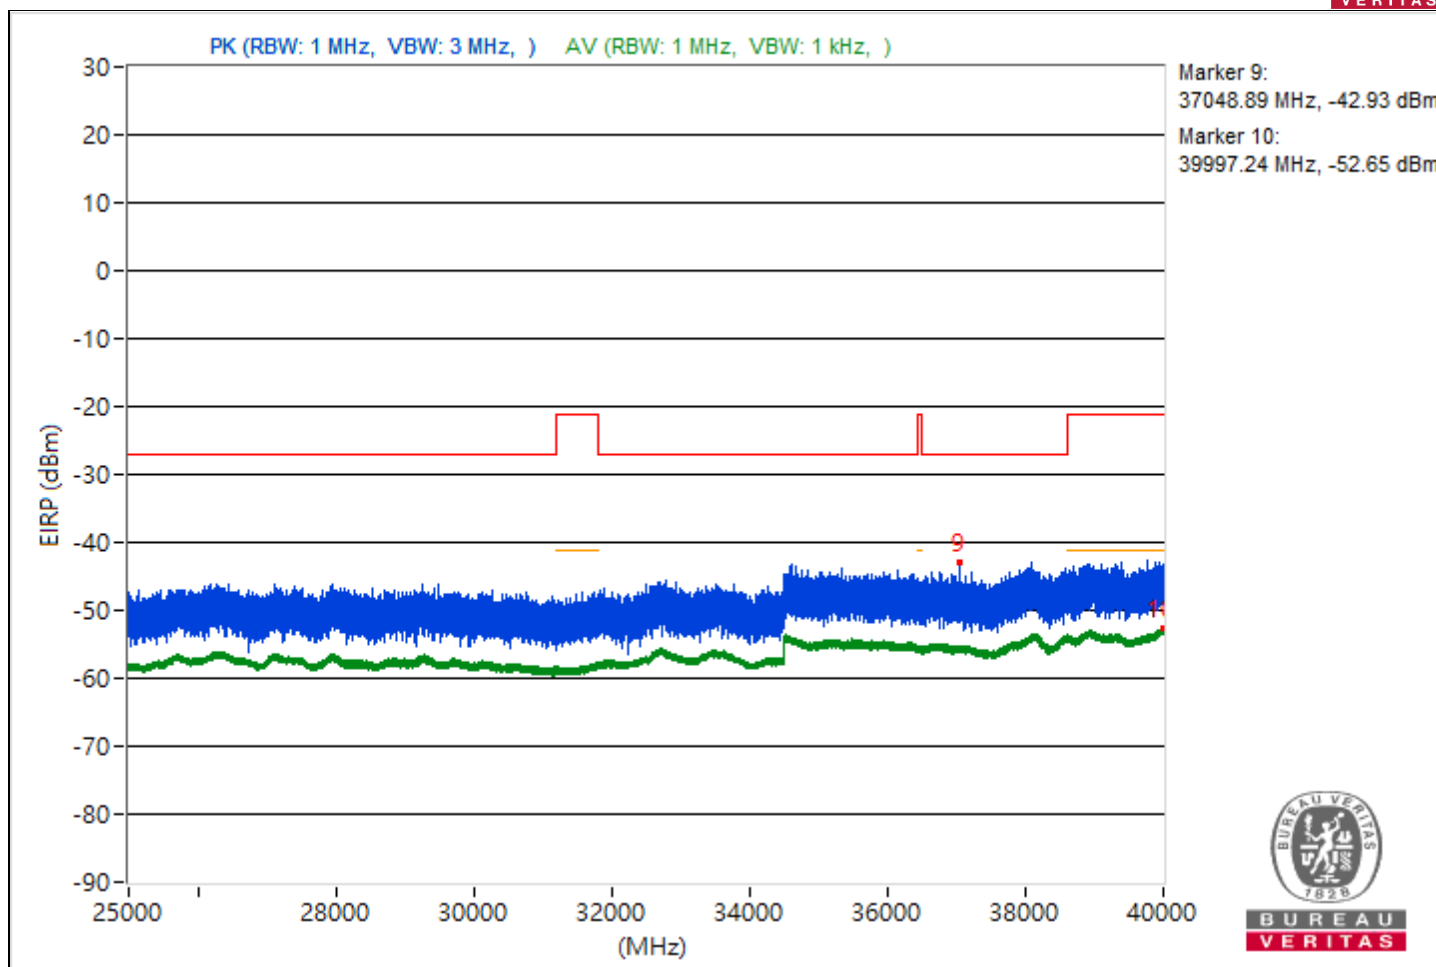





RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.1	54.53 PK	68.26	-13.73	-46.75	-52.16	4.92	-40.73
2	3813.61	47.26 AV	54	-6.74	-55.69	-56.18	4.92	-48
3	#5903.19	63.73 PK	68.26	-4.53	-37.28	-44.02	4.92	-31.53
4	8084.89	44.09 AV	54	-9.91	-59.54	-58.69	4.92	-51.17
5	#17290.3	55.83 PK	68.26	-12.43	-45.48	-50.74	4.92	-39.43
6	18976.8	46.51 AV	54	-7.49	-56.86	-56.51	4.92	-48.75
7	#23597.7	58.34 PK	68.26	-9.92	-47.8	-43.11	4.92	-36.92
8	23859.9	48.81 AV	54	-5.19	-54.92	-53.91	4.92	-46.45
9	#38555.82	52.59 PK	68.26	-15.67	-55.65	-48.33	4.92	-42.67
10	39988.62	42.53 AV	54	-11.47	-60.38	-60.96	4.92	-52.73

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

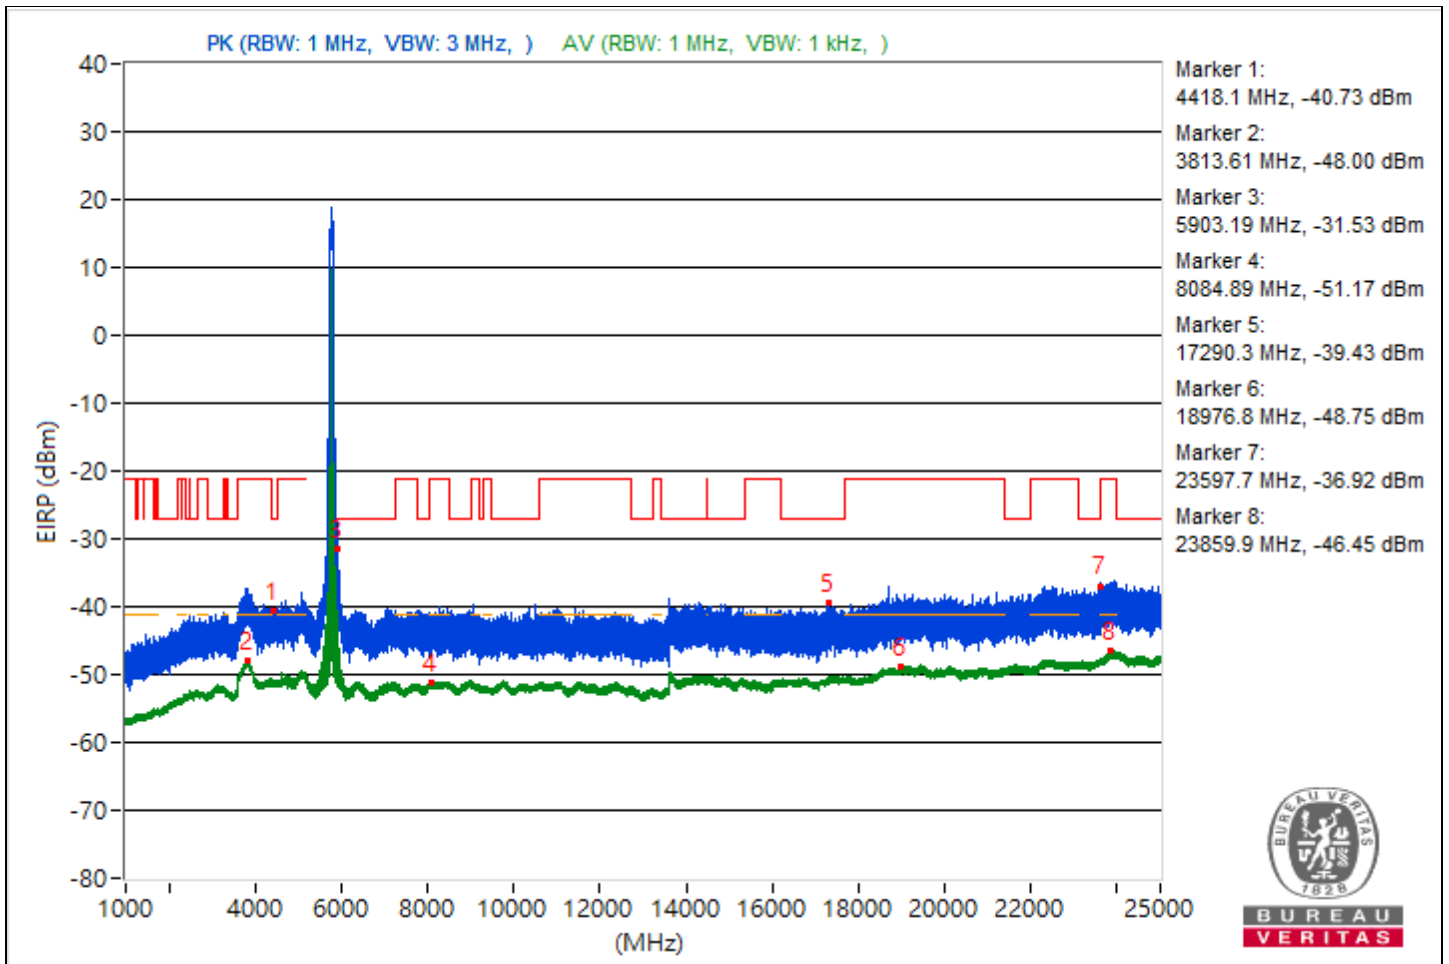

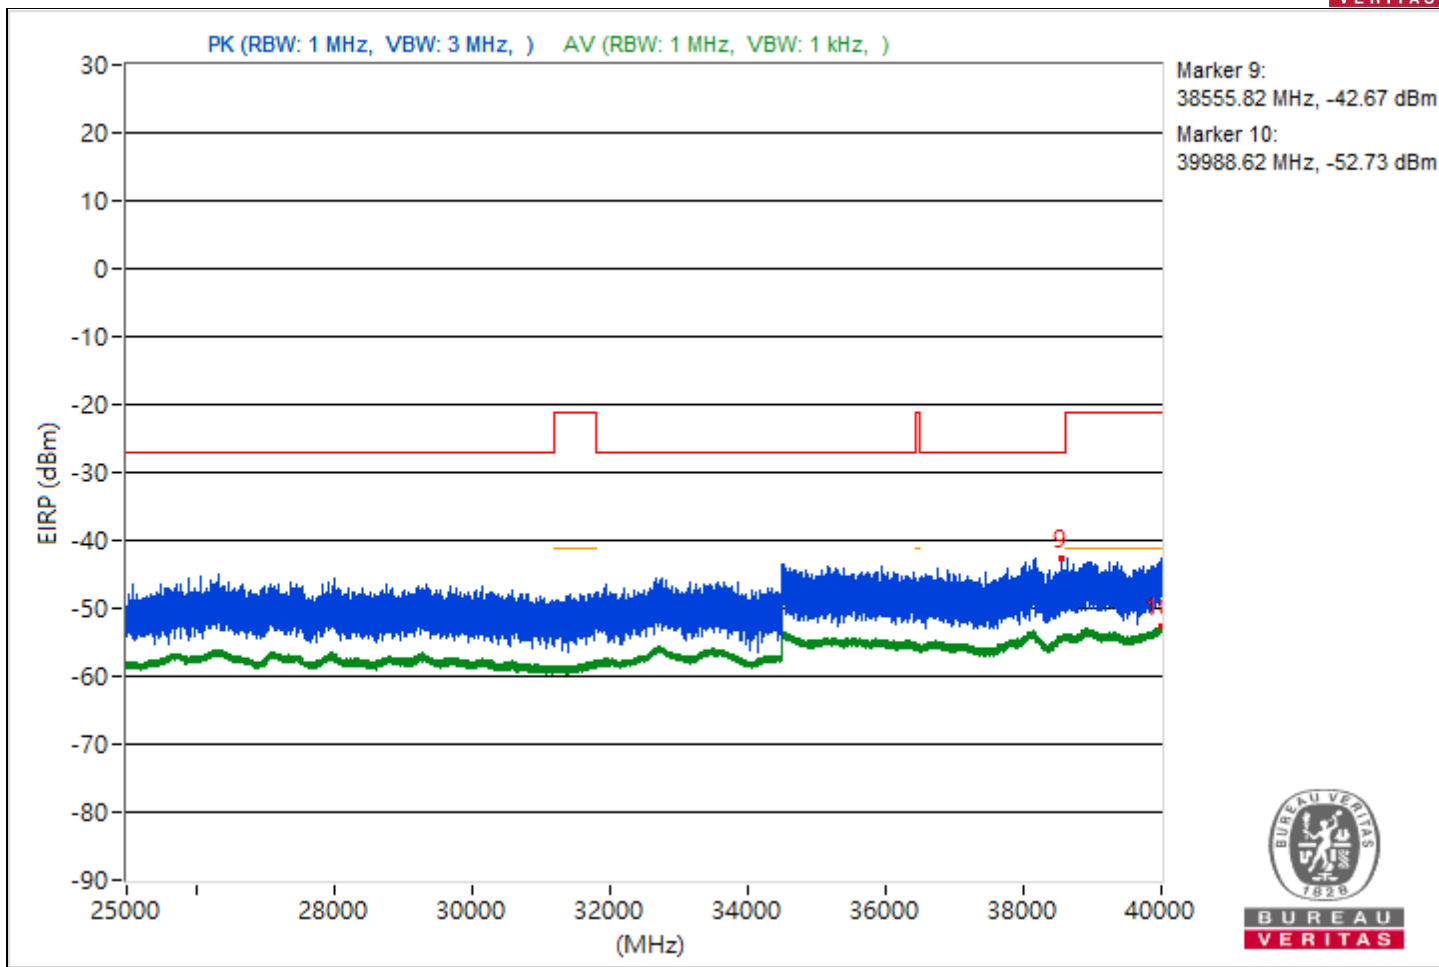



RF Mode	802.11ax (HE160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.64	54.47 PK	68.26	-13.79	-52.81	-46.65	4.92	-40.79
2	5099.43	49.19 AV	54	-4.81	-54.31	-53.71	4.92	-46.07
3	#6349.87	55.18 PK	68.26	-13.08	-45.92	-52.18	4.92	-40.08
4	8442.31	44.65 AV	54	-9.35	-58.9	-58.21	4.92	-50.61
5	#13620.36	55.88 PK	68.26	-12.38	-44.96	-52.86	4.92	-39.38
6	18863.4	46.65 AV	54	-7.35	-56.3	-56.8	4.92	-48.61
7	#24127.7	58.54 PK	68.26	-9.72	-42.98	-47.39	4.92	-36.72
8	23897.5	49.13 AV	54	-4.87	-54.26	-53.87	4.92	-46.13
9	#34548.18	51.73 PK	68.26	-16.53	-49.59	-54.82	4.92	-43.53
10	39981.24	42.61 AV	54	-11.39	-61.47	-59.83	4.92	-52.65

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

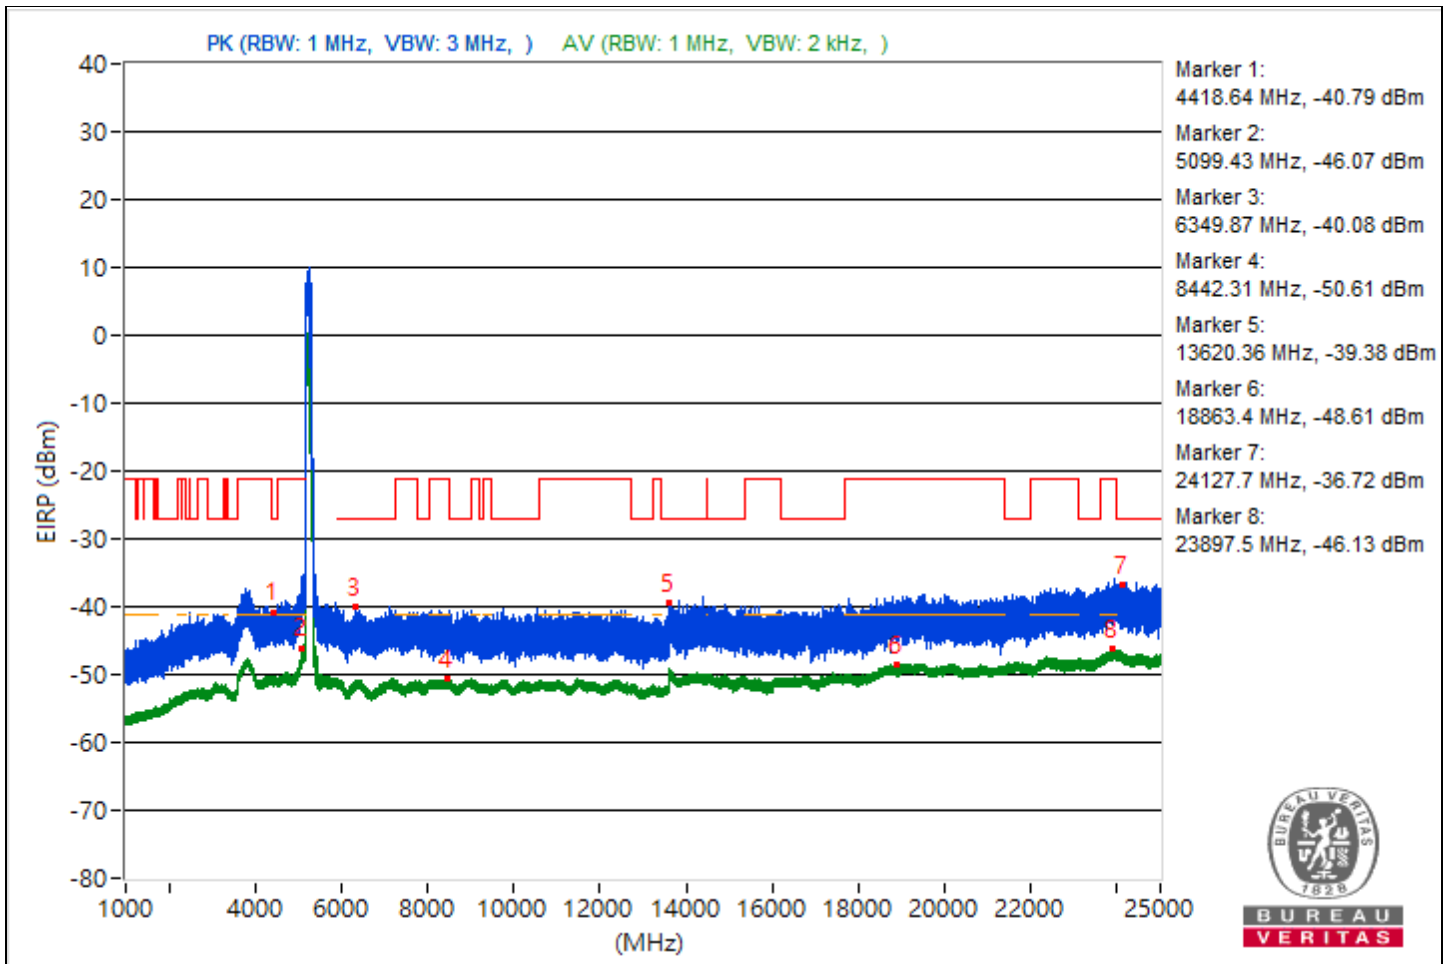

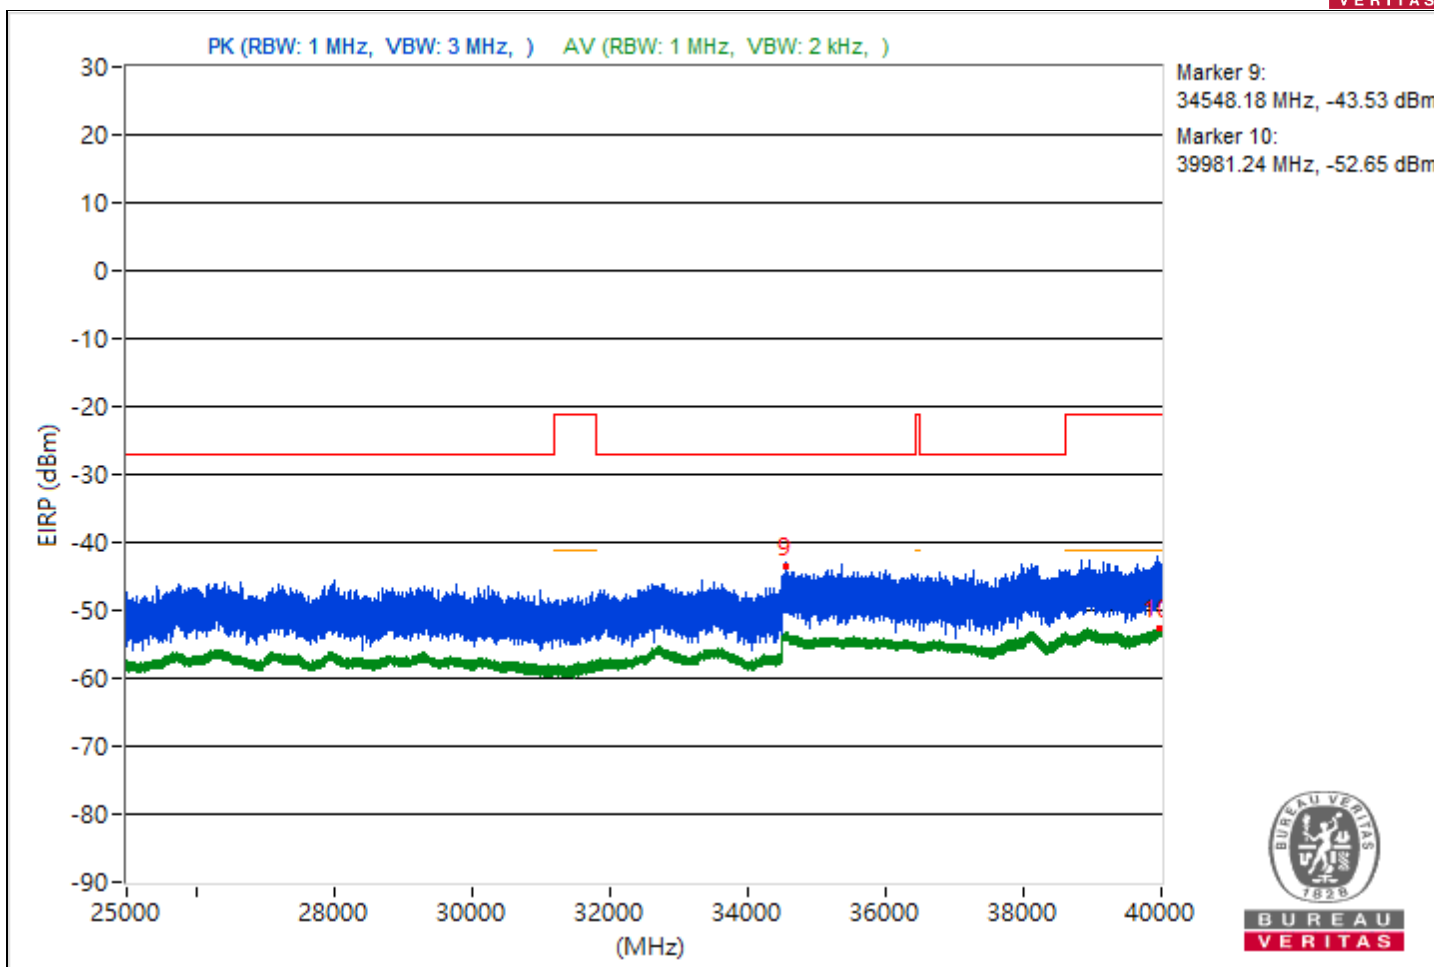



RF Mode	802.11ax (HE160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4457.07	54.63 PK	68.26	-13.63	-47.43	-50.08	4.92	-40.63
2	3796.89	47.28 AV	54	-6.72	-55.26	-56.67	4.92	-47.98
3	#7057.33	54.72 PK	68.26	-13.54	-46.78	-51.27	4.92	-40.54
4	11509.69	44.46 AV	54	-9.54	-58.02	-59.59	4.92	-50.8
5	#14710.93	56 PK	68.26	-12.26	-52.39	-44.89	4.92	-39.26
6	18999.7	46.79 AV	54	-7.21	-56.42	-56.38	4.92	-48.47
7	#24115.1	58.74 PK	68.26	-9.52	-42.91	-46.87	4.92	-36.52
8	23915.4	49.05 AV	54	-4.95	-53.97	-54.31	4.92	-46.21
9	#34558.4	52.76 PK	68.26	-15.5	-49.05	-52.47	4.92	-42.5
10	39988	42.93 AV	54	-11.07	-60.05	-60.49	4.92	-52.33

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

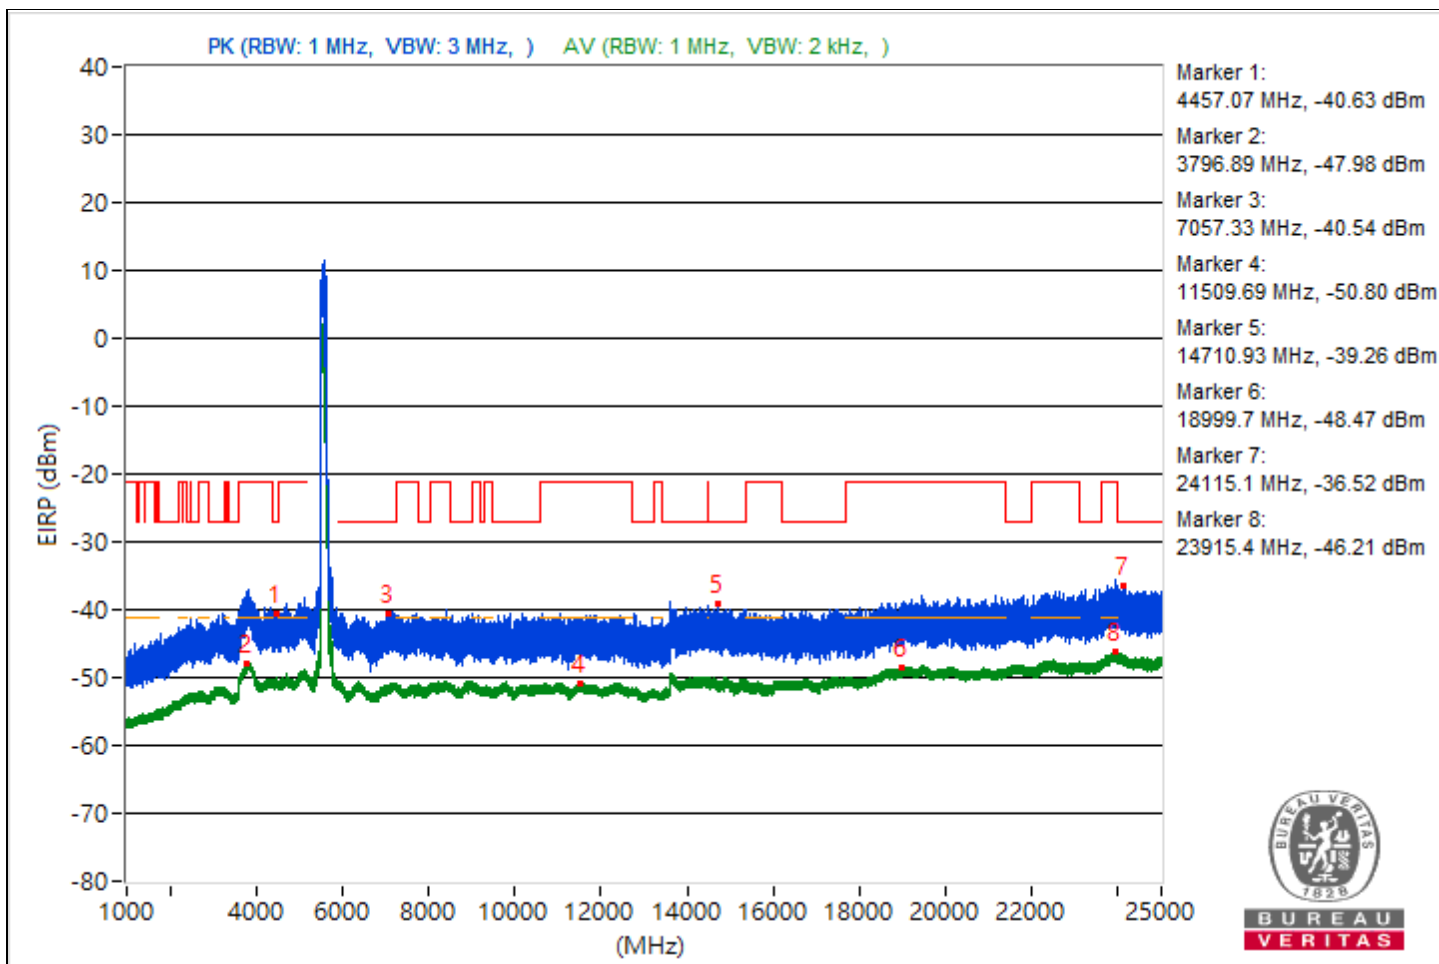

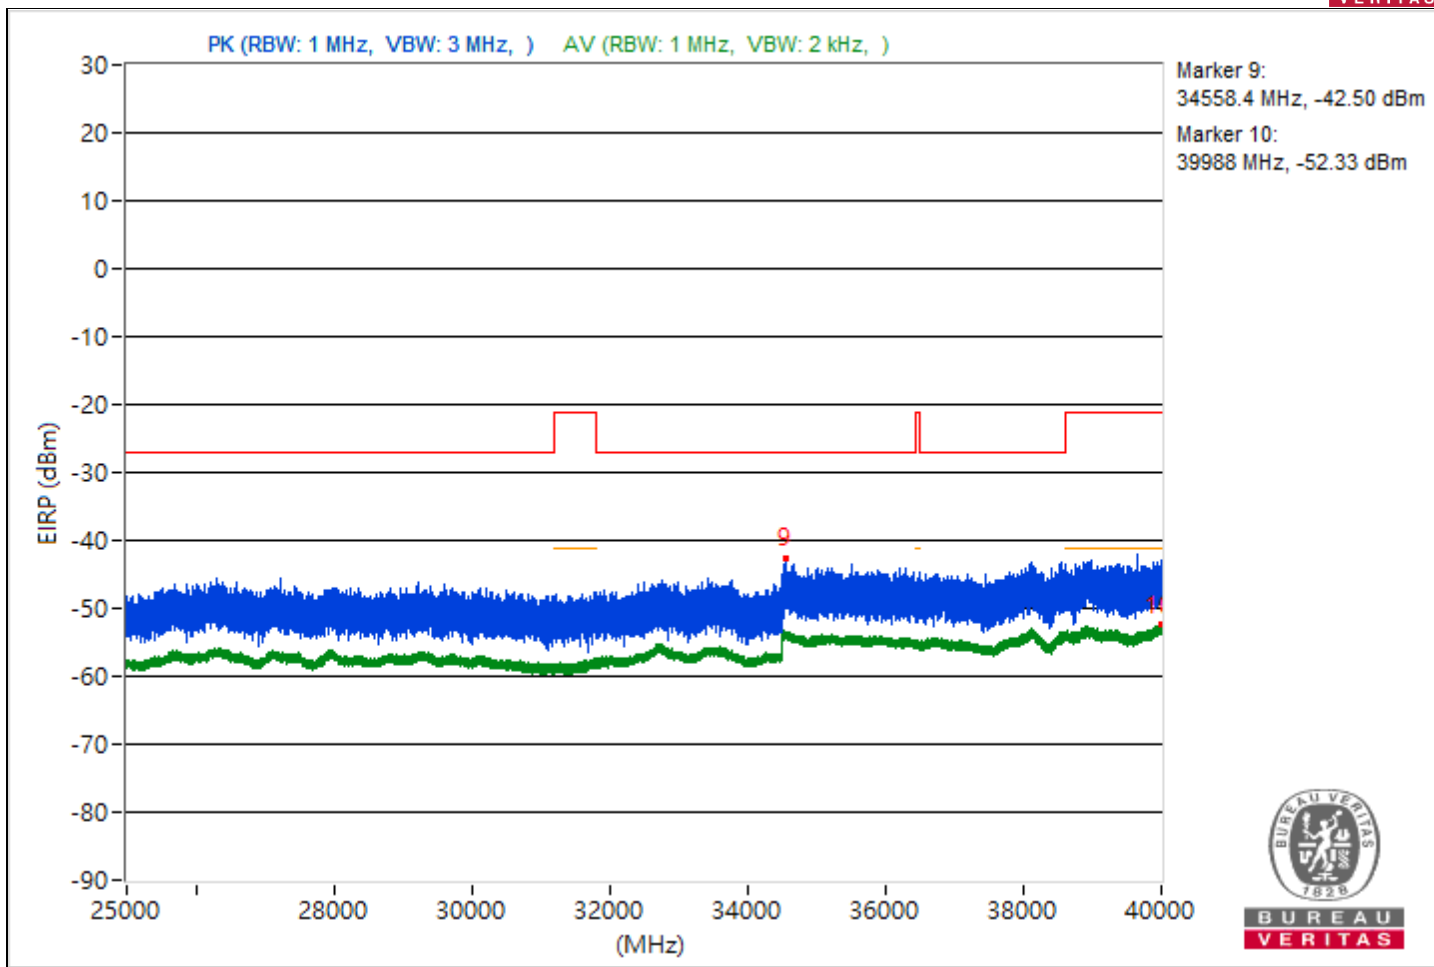



RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4430.08	55.89 PK	68.26	-12.37	-53.88	-44.8	4.92	-39.37
2	5093.83	47.41 AV	54	-6.59	-55.51	-56.07	4.92	-47.85
3	#7155.02	55.58 PK	68.26	-12.68	-46.38	-49.34	4.92	-39.68
4	8464.89	44.14 AV	54	-9.86	-58.59	-59.56	4.92	-51.12
5	#13648.71	55.86 PK	68.26	-12.4	-52.62	-45.02	4.92	-39.4
6	18752.5	46.36 AV	54	-7.64	-56.59	-57.08	4.92	-48.9
7	#24238.1	58.49 PK	68.26	-9.77	-42.31	-50.42	4.92	-36.77
8	23945.5	48.88 AV	54	-5.12	-54.78	-53.87	4.92	-46.38
9	#34803.47	52.45 PK	68.26	-15.81	-48.57	-55.3	4.92	-42.81
10	39996	42.64 AV	54	-11.36	-60.85	-60.26	4.92	-52.62

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

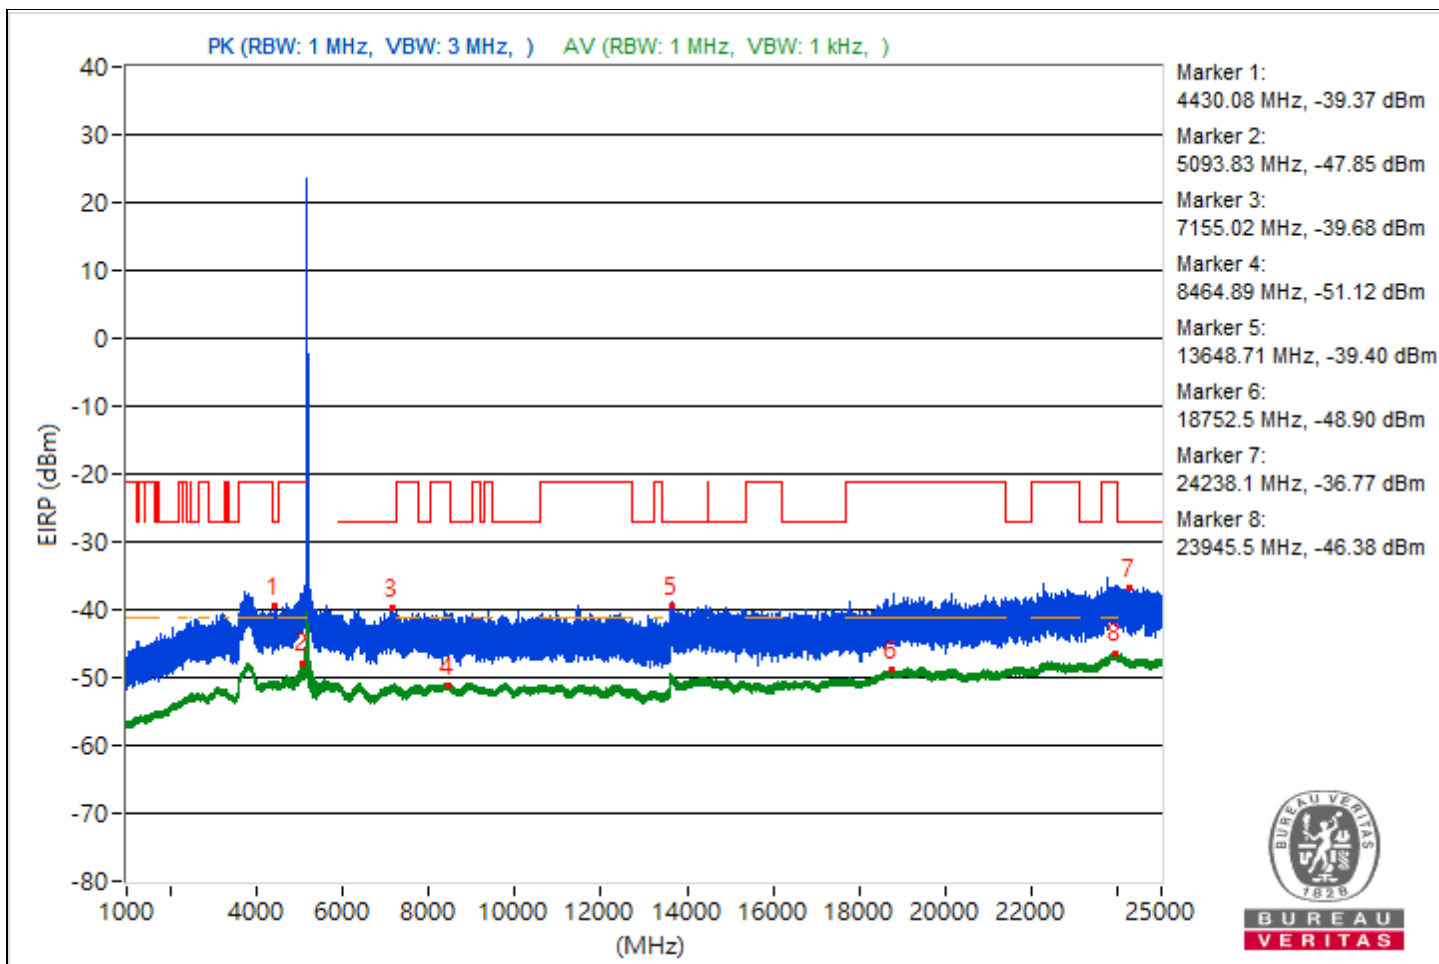

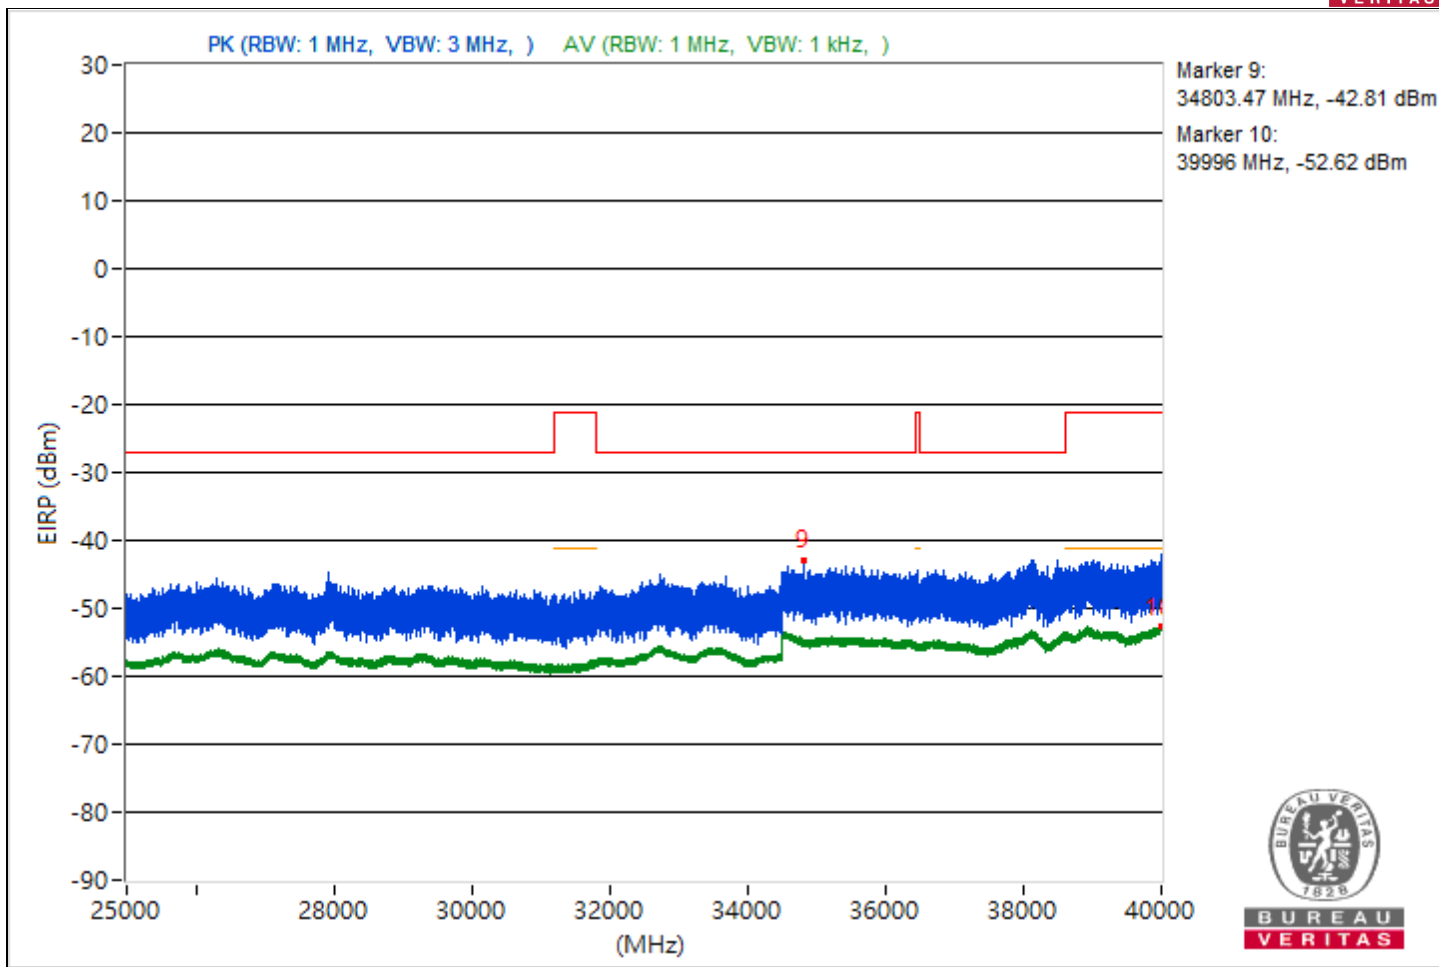





RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4454.58	55 PK	68.26	-13.26	-46.2	-51.96	4.92	-40.26
2	3817.11	47.17 AV	54	-6.83	-55.67	-56.41	4.92	-48.09
3	#6450.59	54.76 PK	68.26	-13.5	-46.3	-52.77	4.92	-40.5
4	8320.53	44.18 AV	54	-9.82	-58.65	-59.41	4.92	-51.08
5	#14423.38	56.15 PK	68.26	-12.11	-50.73	-45.08	4.92	-39.11
6	18995	46.3 AV	54	-7.7	-57.28	-56.52	4.92	-48.96
7	#24936	58.15 PK	68.26	-10.11	-43.03	-48.9	4.92	-37.11
8	23885.6	48.66 AV	54	-5.34	-54.02	-55.1	4.92	-46.6
9	#38080.62	52.79 PK	68.26	-15.47	-52.84	-48.85	4.92	-42.47
10	39993.78	42.66 AV	54	-11.34	-60.18	-60.9	4.92	-52.6

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

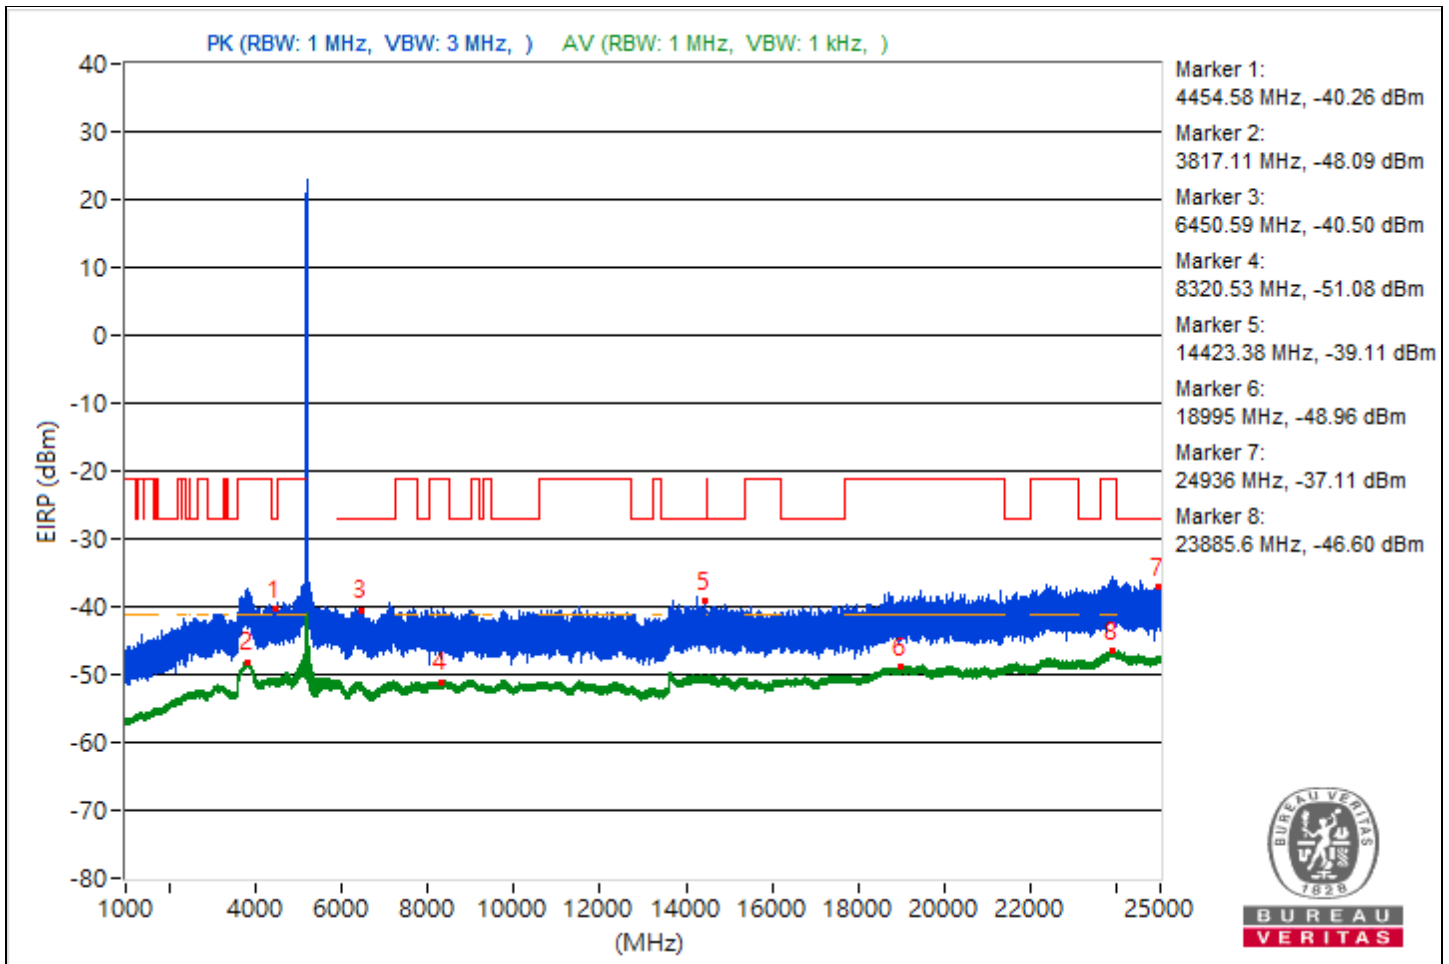

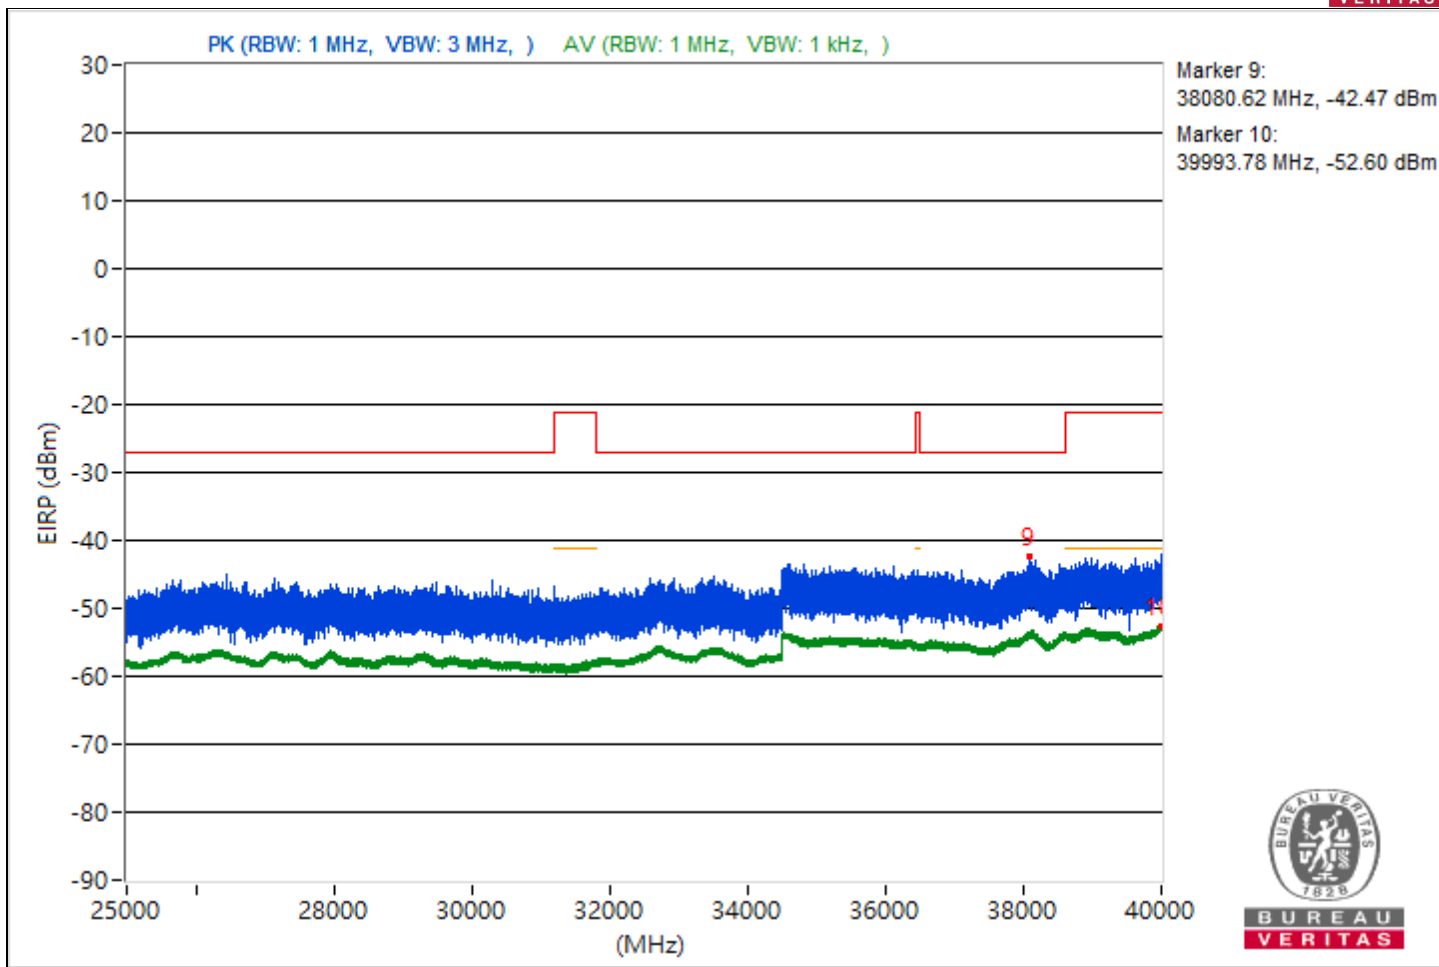



RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.8	55.4 PK	68.26	-12.86	-46.17	-50.41	4.92	-39.86
2	3804.98	47.36 AV	54	-6.64	-56.14	-55.53	4.92	-47.9
3	#7210.4	55.12 PK	68.26	-13.14	-46.18	-51.49	4.92	-40.14
4	8384.36	44.54 AV	54	-9.46	-58.28	-59.05	4.92	-50.72
5	#14310.4	55.57 PK	68.26	-12.69	-51.63	-45.58	4.92	-39.69
6	18731.7	46.31 AV	54	-7.69	-56.63	-57.14	4.92	-48.95
7	#24815.5	58.51 PK	68.26	-9.75	-48.84	-42.6	4.92	-36.75
8	23927.4	48.77 AV	54	-5.23	-54.21	-54.64	4.92	-46.49
9	#34507.56	51.98 PK	68.26	-16.28	-49.23	-54.92	4.92	-43.28
10	39996.36	42.76 AV	54	-11.24	-60.89	-60.02	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

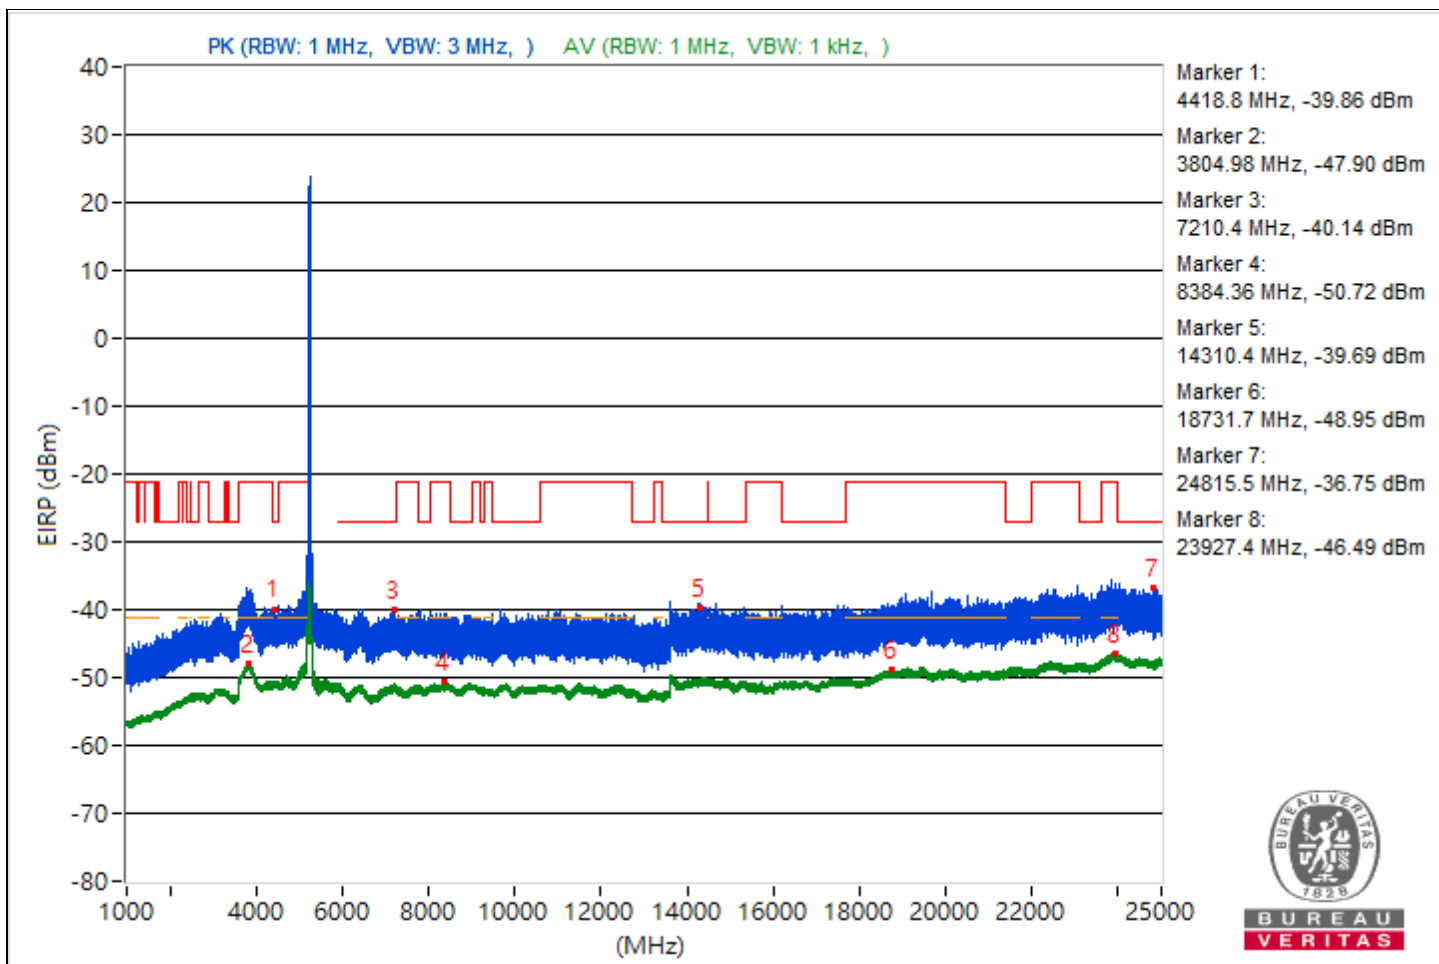

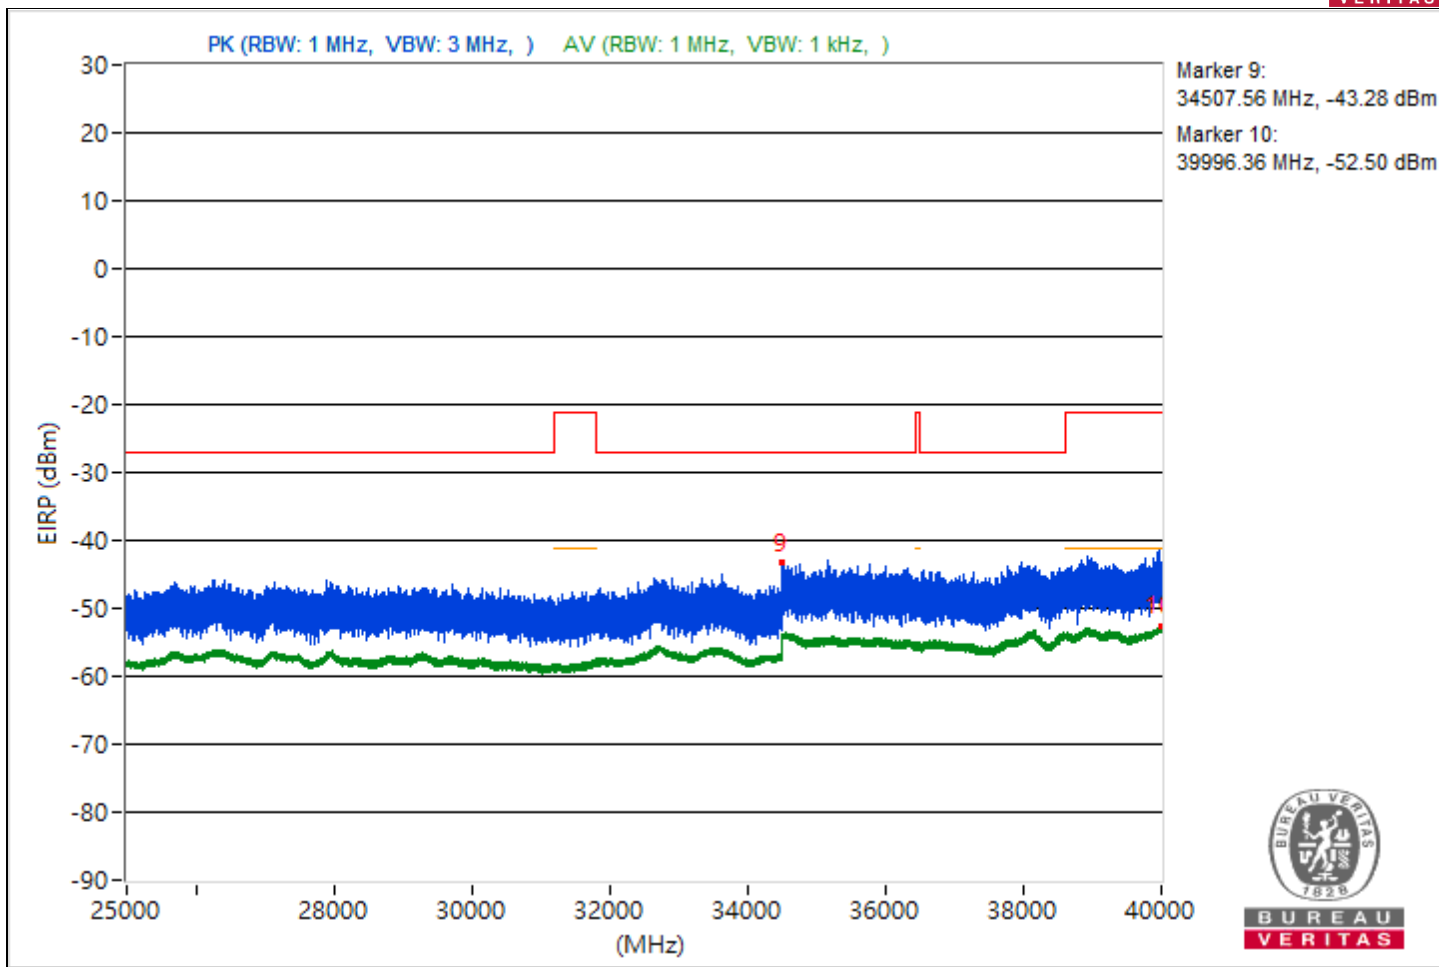



RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3107.39	54.76 PK	68.26	-13.5	-51.71	-46.59	4.92	-40.5
2	3785.38	47.17 AV	54	-6.83	-56.53	-55.56	4.92	-48.09
3	#5912.37	56.59 PK	68.26	-11.67	-45.85	-47.5	4.92	-38.67
4	11490.93	45.16 AV	54	-8.84	-58.73	-57.43	4.92	-50.1
5	#14708.62	56.46 PK	68.26	-11.8	-44.89	-49.96	4.92	-38.8
6	18778.7	46.29 AV	54	-7.71	-57.25	-56.58	4.92	-48.97
7	#24966.8	58.95 PK	68.26	-9.31	-42.75	-46.5	4.92	-36.31
8	23885.7	48.88 AV	54	-5.12	-54.63	-54.01	4.92	-46.38
9	#38045.07	52.09 PK	68.26	-16.17	-48.96	-55.53	4.92	-43.17
10	39995.82	42.85 AV	54	-11.15	-60.13	-60.56	4.92	-52.41

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

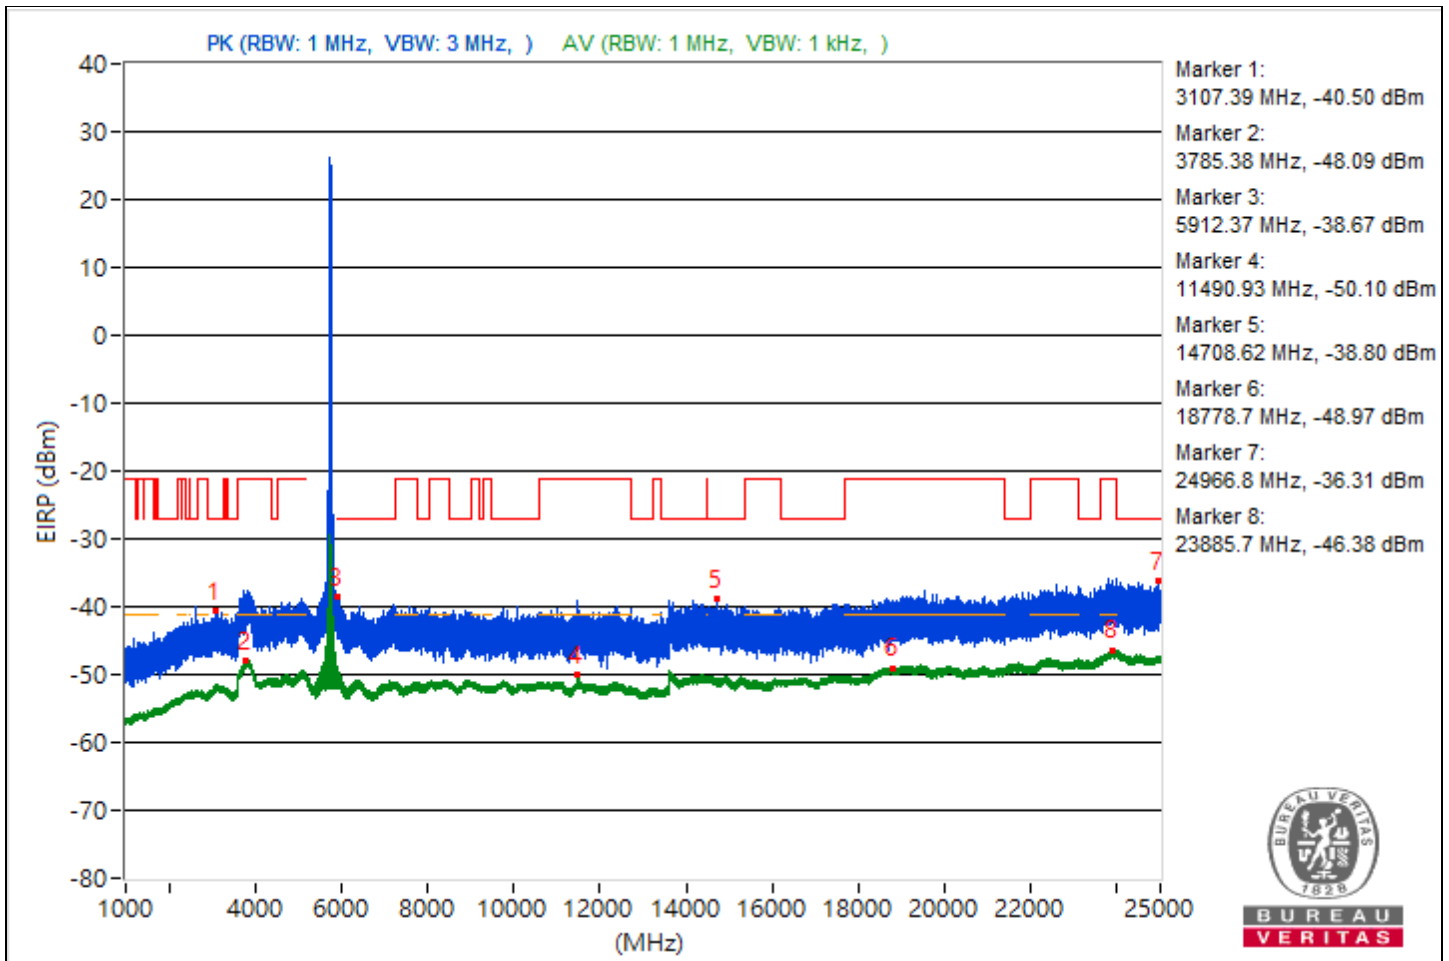

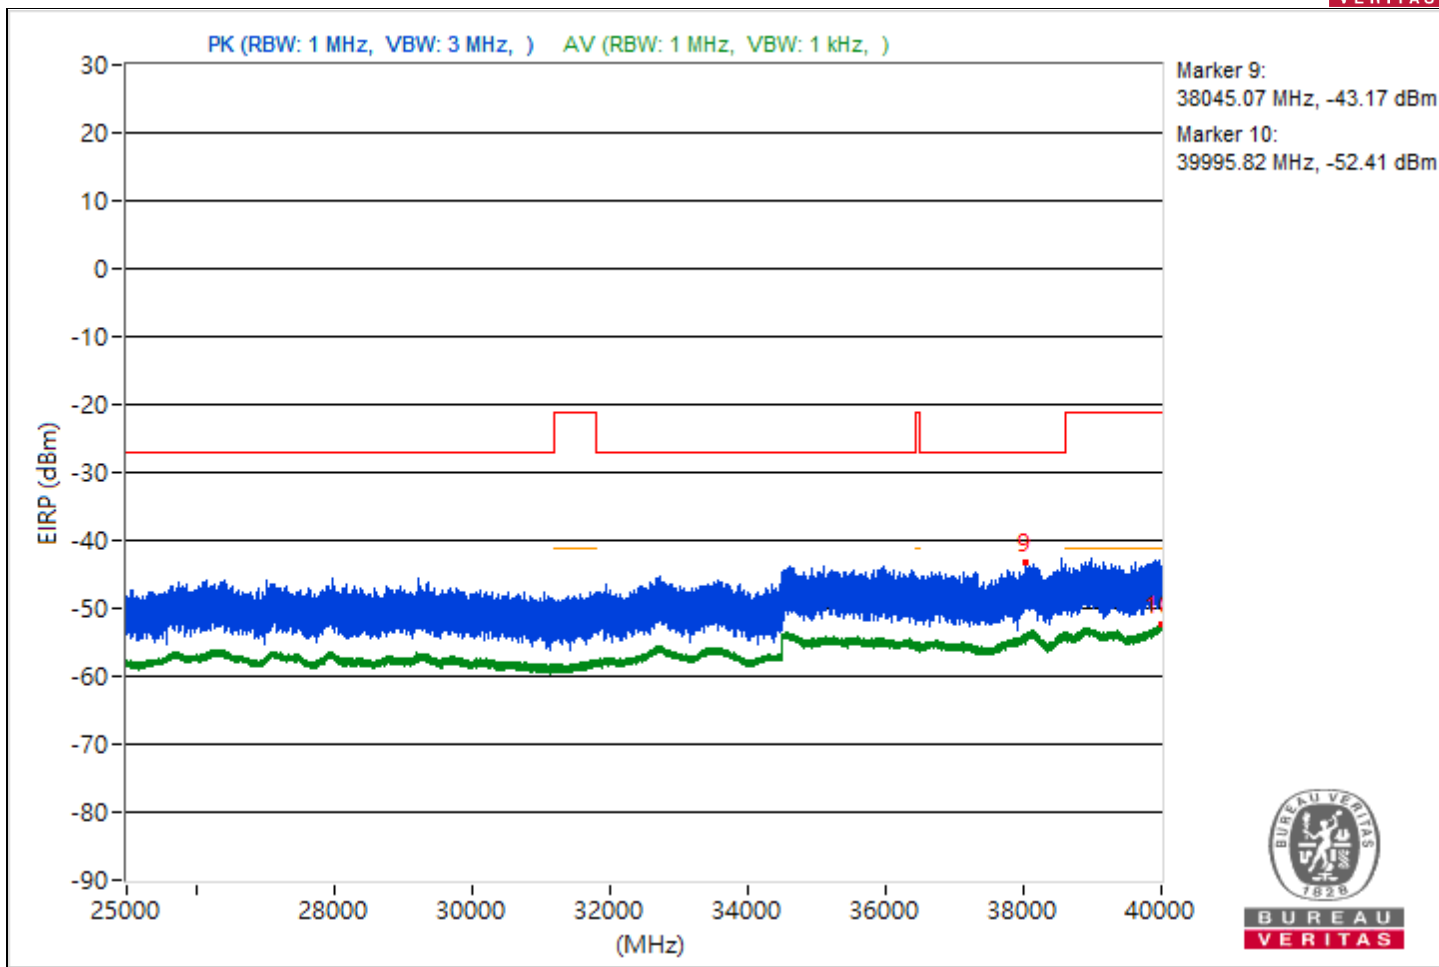



RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4435.06	54 PK	68.26	-14.26	-52.15	-47.45	4.92	-41.26
2	3834.77	47.24 AV	54	-6.76	-56.26	-55.65	4.92	-48.02
3	#5948.46	56.24 PK	68.26	-12.02	-45.27	-49.75	4.92	-39.02
4	11571.29	45.03 AV	54	-8.97	-58.2	-58.11	4.92	-50.23
5	#17377.2	55.36 PK	68.26	-12.9	-45.72	-52.1	4.92	-39.9
6	18994.6	46.42 AV	54	-7.58	-56.47	-57.09	4.92	-48.84
7	#24081	58.81 PK	68.26	-9.45	-42.61	-47.45	4.92	-36.45
8	23923.8	48.71 AV	54	-5.29	-53.92	-55.12	4.92	-46.55
9	#36032.18	51.86 PK	68.26	-16.4	-49.05	-56.48	4.92	-43.4
10	39992.62	42.82 AV	54	-11.18	-60.21	-60.53	4.92	-52.44

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

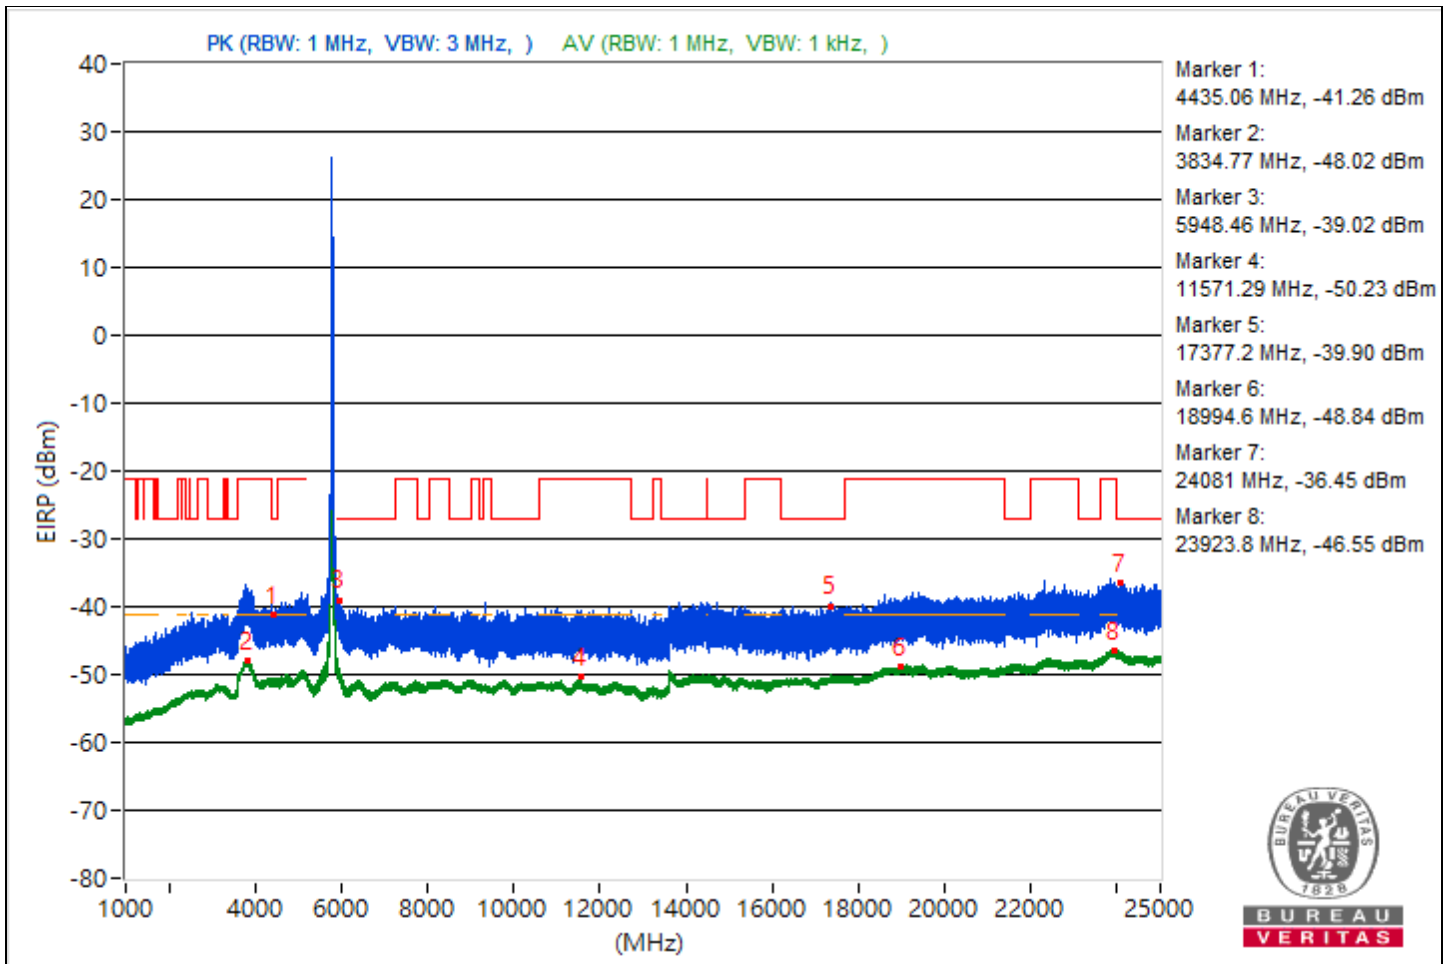

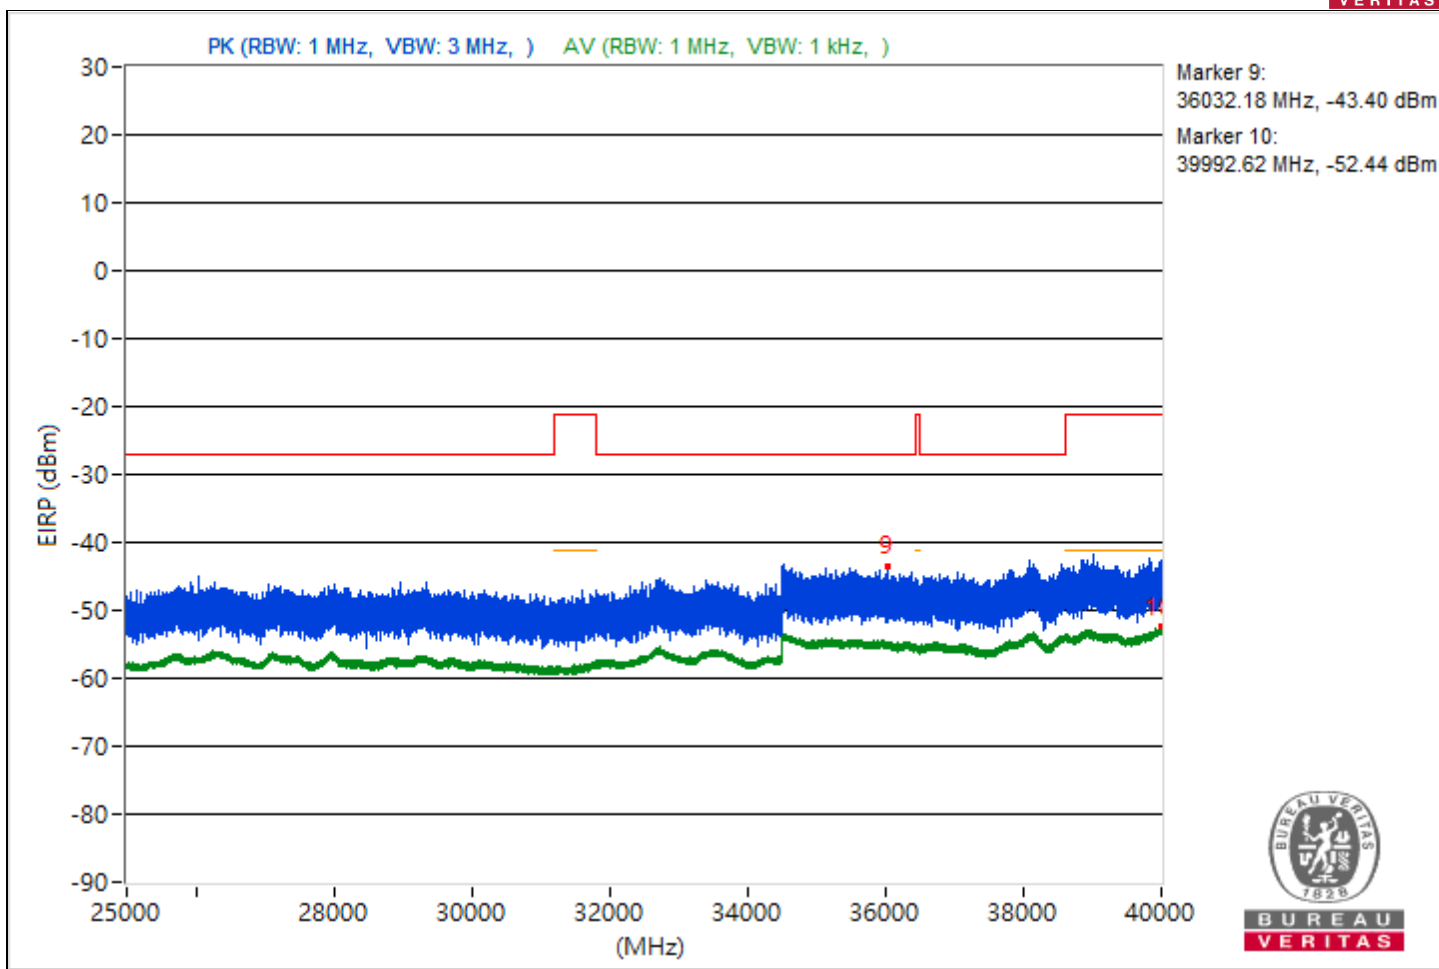





RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4414.13	55.57 PK	68.26	-12.69	-49.09	-46.52	4.92	-39.69
2	3817.66	47.28 AV	54	-6.72	-55.48	-56.39	4.92	-47.98
3	#5908.63	62.27 PK	68.26	-5.99	-38.85	-45	4.92	-32.99
4	11652.27	45.11 AV	54	-8.89	-58.44	-57.75	4.92	-50.15
5	#14524.98	55.86 PK	68.26	-12.4	-46.15	-48.97	4.92	-39.4
6	18758.7	46.24 AV	54	-7.76	-56.63	-57.29	4.92	-49.02
7	#24447.9	58.84 PK	68.26	-9.42	-48.3	-42.32	4.92	-36.42
8	23876.5	48.86 AV	54	-5.14	-54.15	-54.51	4.92	-46.4
9	#38110.4	52.22 PK	68.26	-16.04	-49.07	-54.42	4.92	-43.04
10	39990.93	42.96 AV	54	-11.04	-60.22	-60.24	4.92	-52.3

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

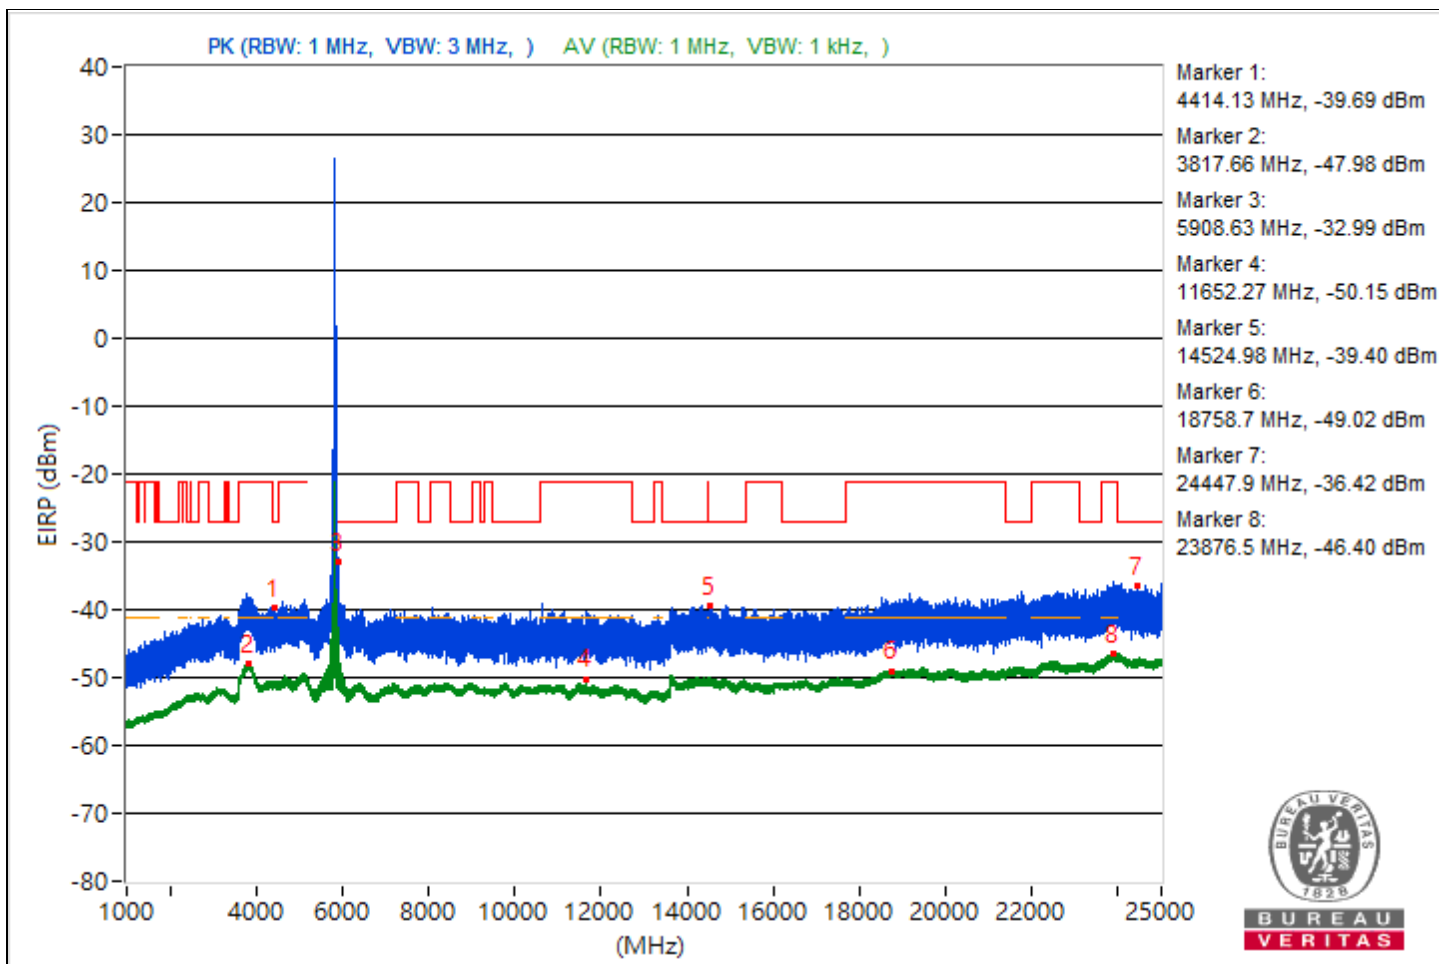

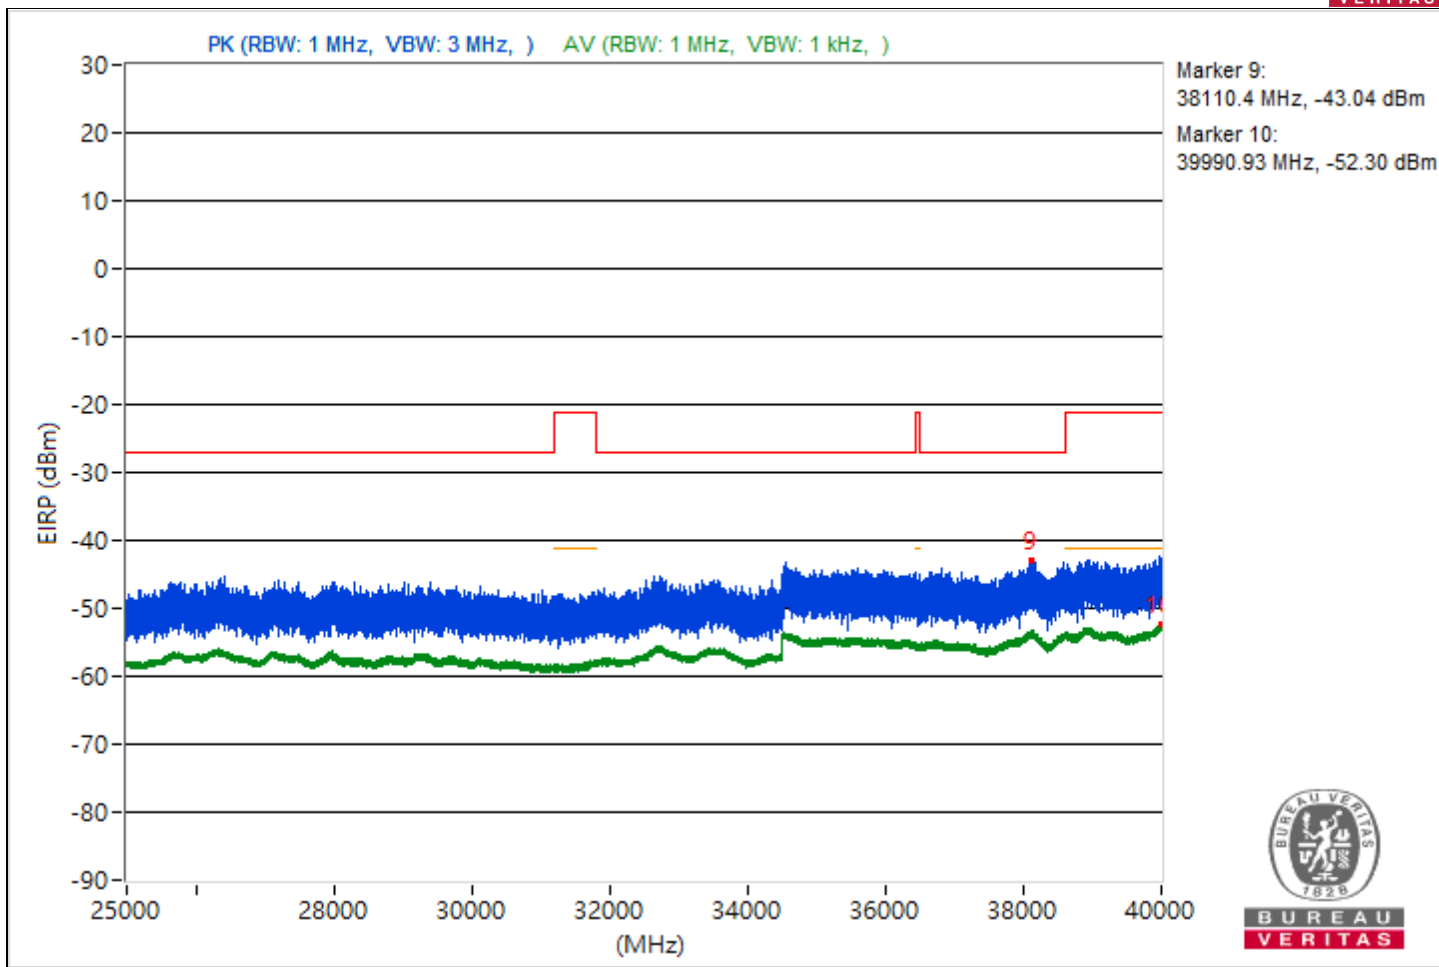



RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4454.03	55.5 PK	68.26	-12.76	-45.84	-50.97	4.92	-39.76
2	5098.89	47.68 AV	54	-6.32	-55.31	-55.71	4.92	-47.58
3	#6457.28	54.59 PK	68.26	-13.67	-52.61	-46.56	4.92	-40.67
4	9010.31	44.32 AV	54	-9.68	-59.24	-58.53	4.92	-50.94
5	#17244.8	55.72 PK	68.26	-12.54	-50.75	-45.63	4.92	-39.54
6	18997.2	46.46 AV	54	-7.54	-56.54	-56.92	4.92	-48.8
7	#24107.8	58.69 PK	68.26	-9.57	-43.53	-45.74	4.92	-36.57
8	23879.6	48.77 AV	54	-5.23	-54.75	-54.12	4.92	-46.49
9	#38540.27	51.73 PK	68.26	-16.53	-56.02	-49.29	4.92	-43.53
10	39996.98	42.76 AV	54	-11.24	-60.9	-60	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

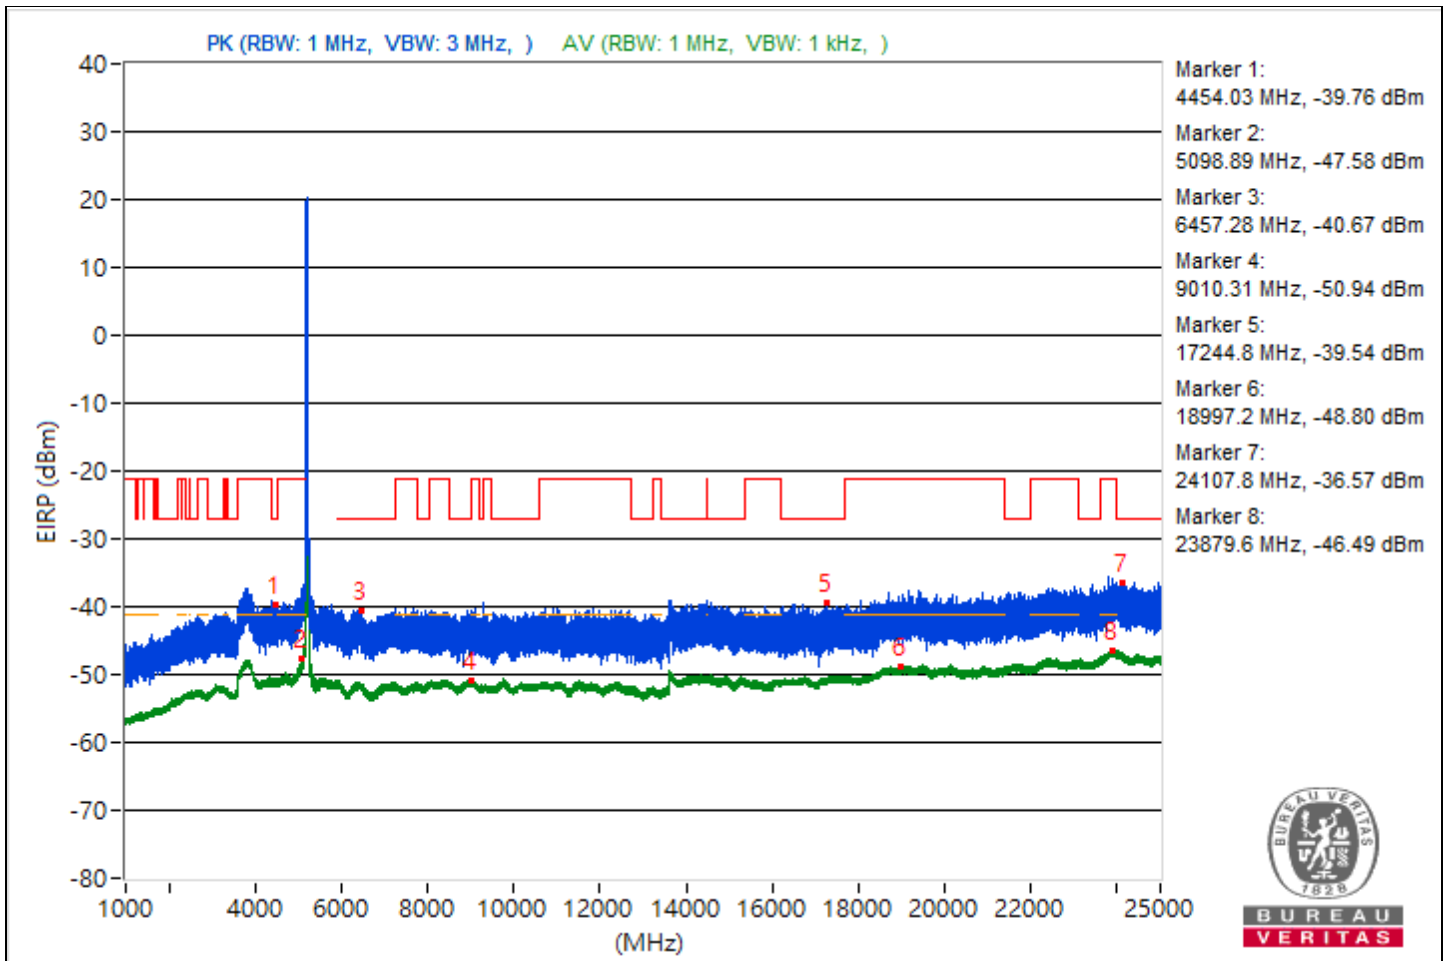

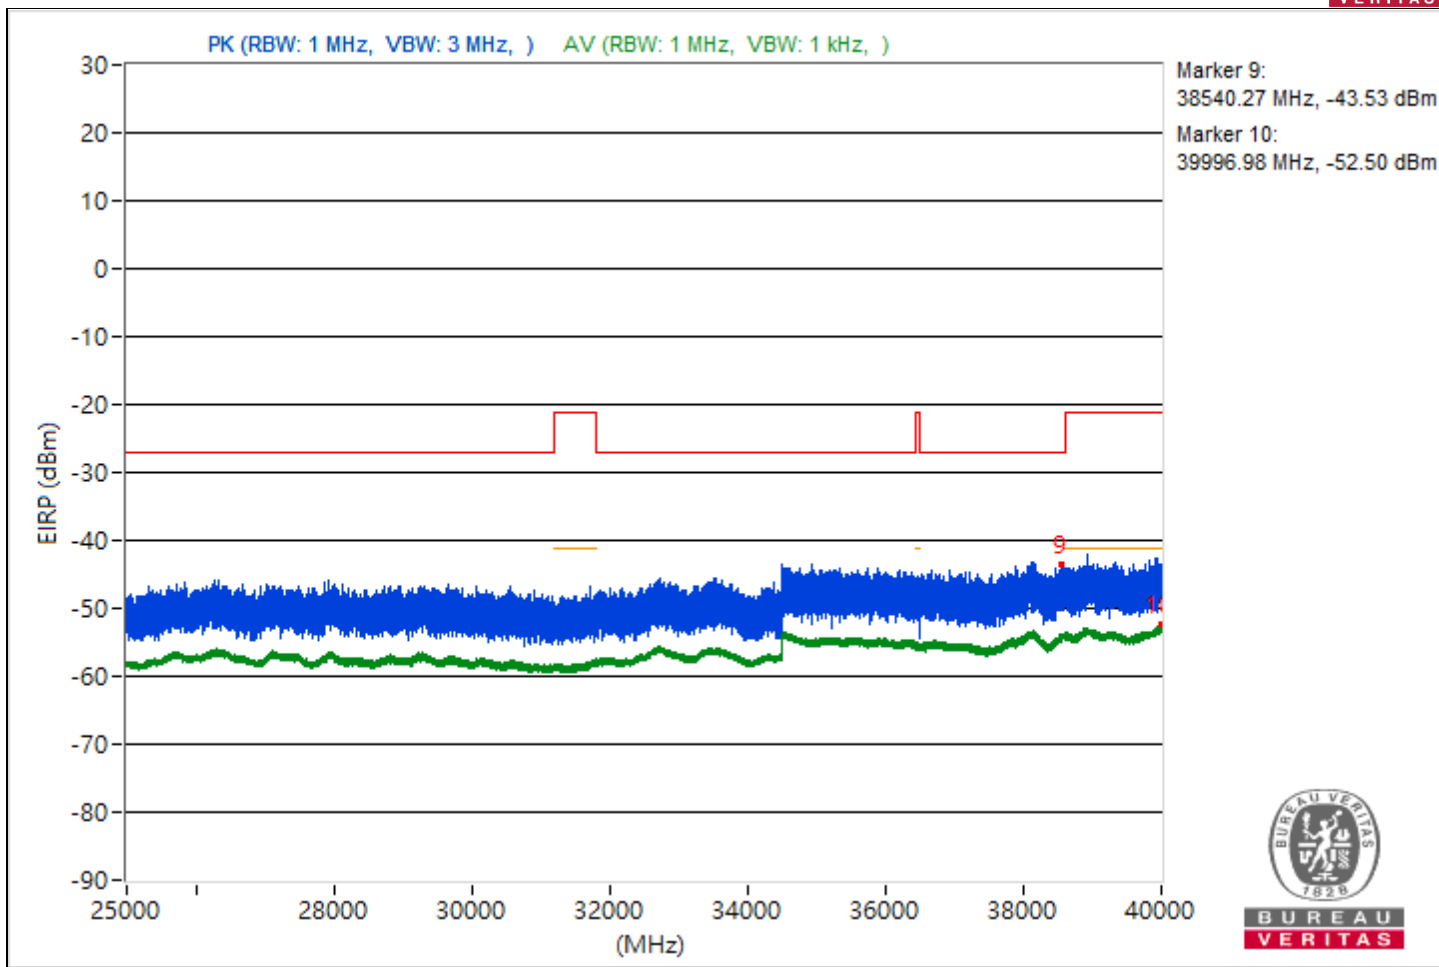



RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4436.07	55.73 PK	68.26	-12.53	-49.06	-46.29	4.92	-39.53
2	5093.21	47.76 AV	54	-6.24	-55.69	-55.18	4.92	-47.5
3	#9714.4	55.33 PK	68.26	-12.93	-45.76	-52.08	4.92	-39.93
4	8397.24	44.51 AV	54	-9.49	-58.37	-59.02	4.92	-50.75
5	#13604.36	56.19 PK	68.26	-12.07	-49.02	-45.64	4.92	-39.07
6	18989.1	46.49 AV	54	-7.51	-56.89	-56.52	4.92	-48.77
7	#24034.3	59.1 PK	68.26	-9.16	-48.08	-42.05	4.92	-36.16
8	23917.2	48.97 AV	54	-5.03	-54.03	-54.42	4.92	-46.29
9	#38167.56	51.83 PK	68.26	-16.43	-49.76	-53.92	4.92	-43.43
10	39999.82	43.03 AV	54	-10.97	-59.93	-60.4	4.92	-52.23

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

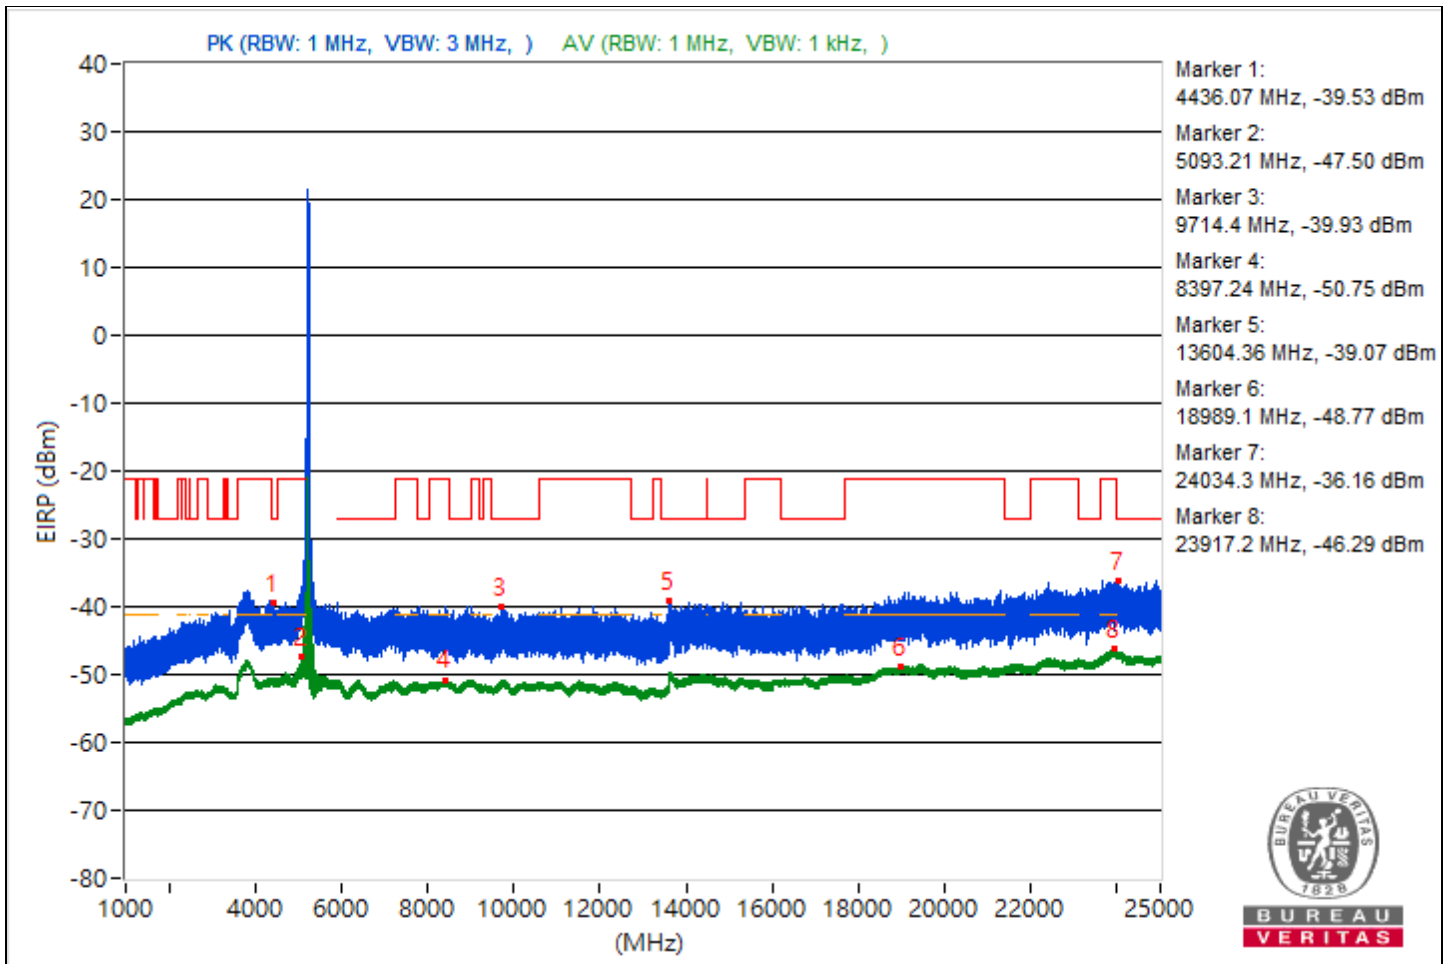

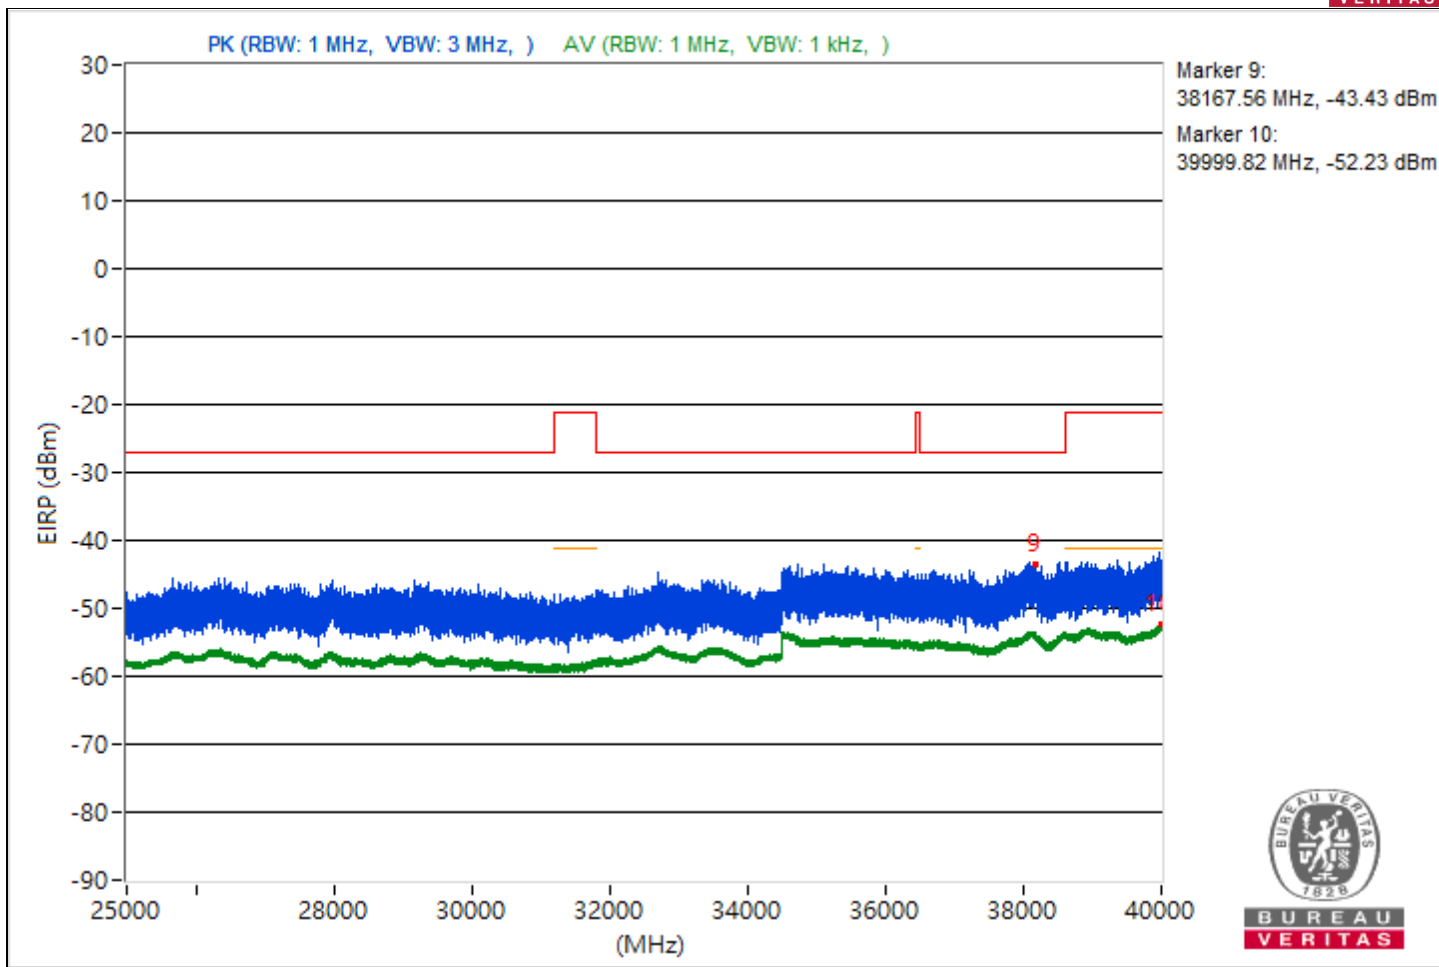



RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4401.46	54.86 PK	68.26	-13.4	-46.59	-51.26	4.92	-40.4
2	3789.27	47.18 AV	54	-6.82	-55.76	-56.28	4.92	-48.08
3	#5905.76	59.24 PK	68.26	-9.02	-48.15	-41.86	4.92	-36.02
4	11513.16	44.5 AV	54	-9.5	-59.29	-58.16	4.92	-50.76
5	#14427.38	55.89 PK	68.26	-12.37	-45.62	-50.08	4.92	-39.37
6	18983.4	46.15 AV	54	-7.85	-57.34	-56.76	4.92	-49.11
7	#24438.7	59.36 PK	68.26	-8.9	-46.99	-42.02	4.92	-35.9
8	23821	48.42 AV	54	-5.58	-54.25	-55.36	4.92	-46.84
9	#38092.89	52.96 PK	68.26	-15.3	-48.52	-53.09	4.92	-42.3
10	39998.49	42.59 AV	54	-11.41	-60.19	-61.05	4.92	-52.67

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

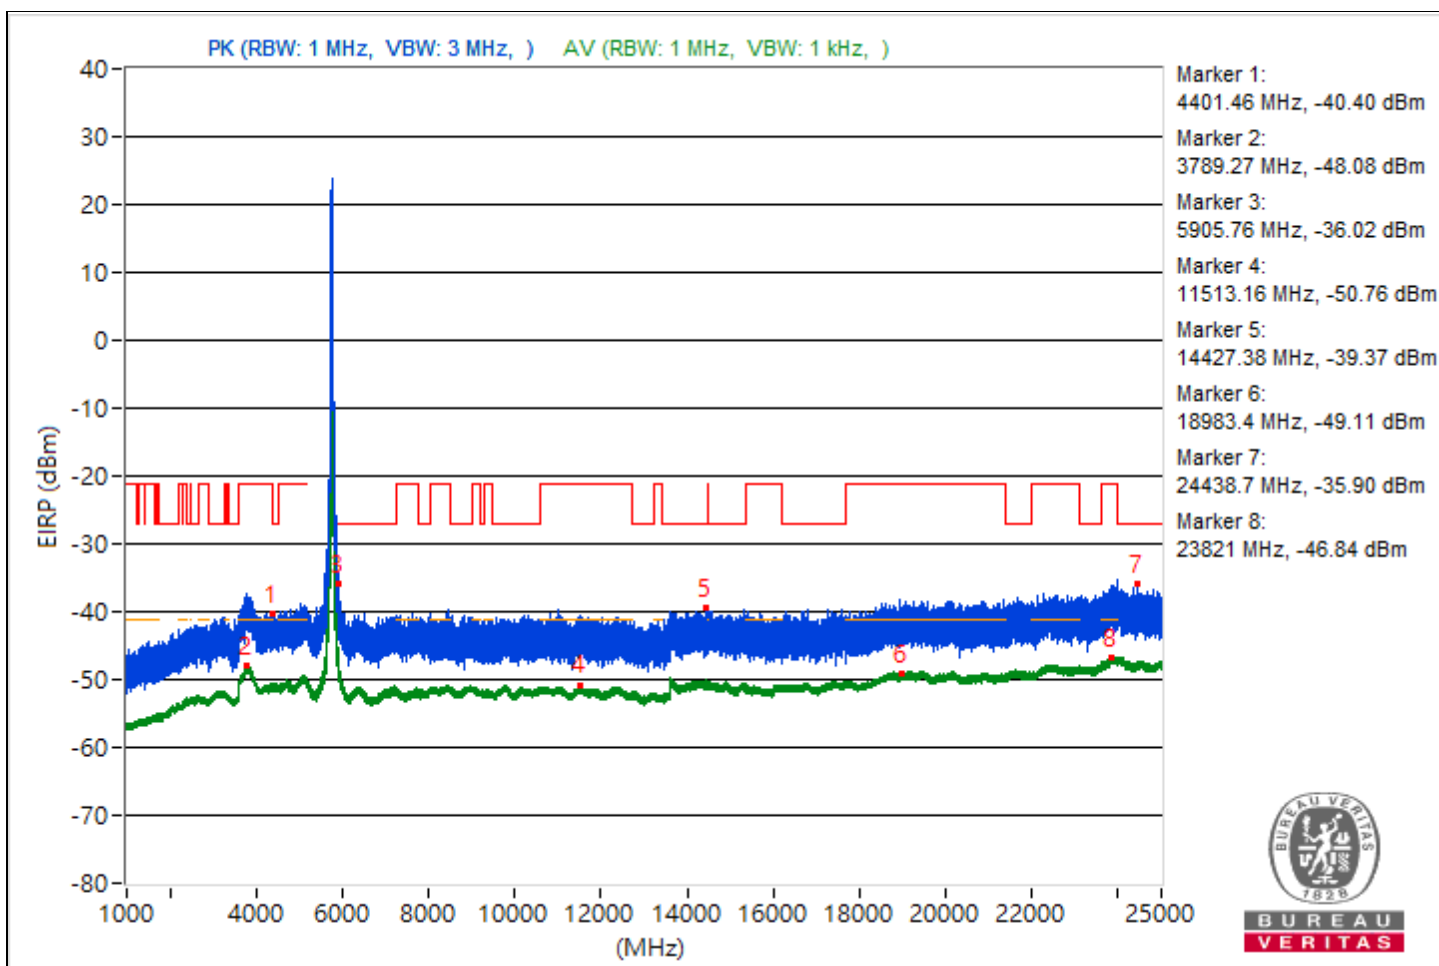

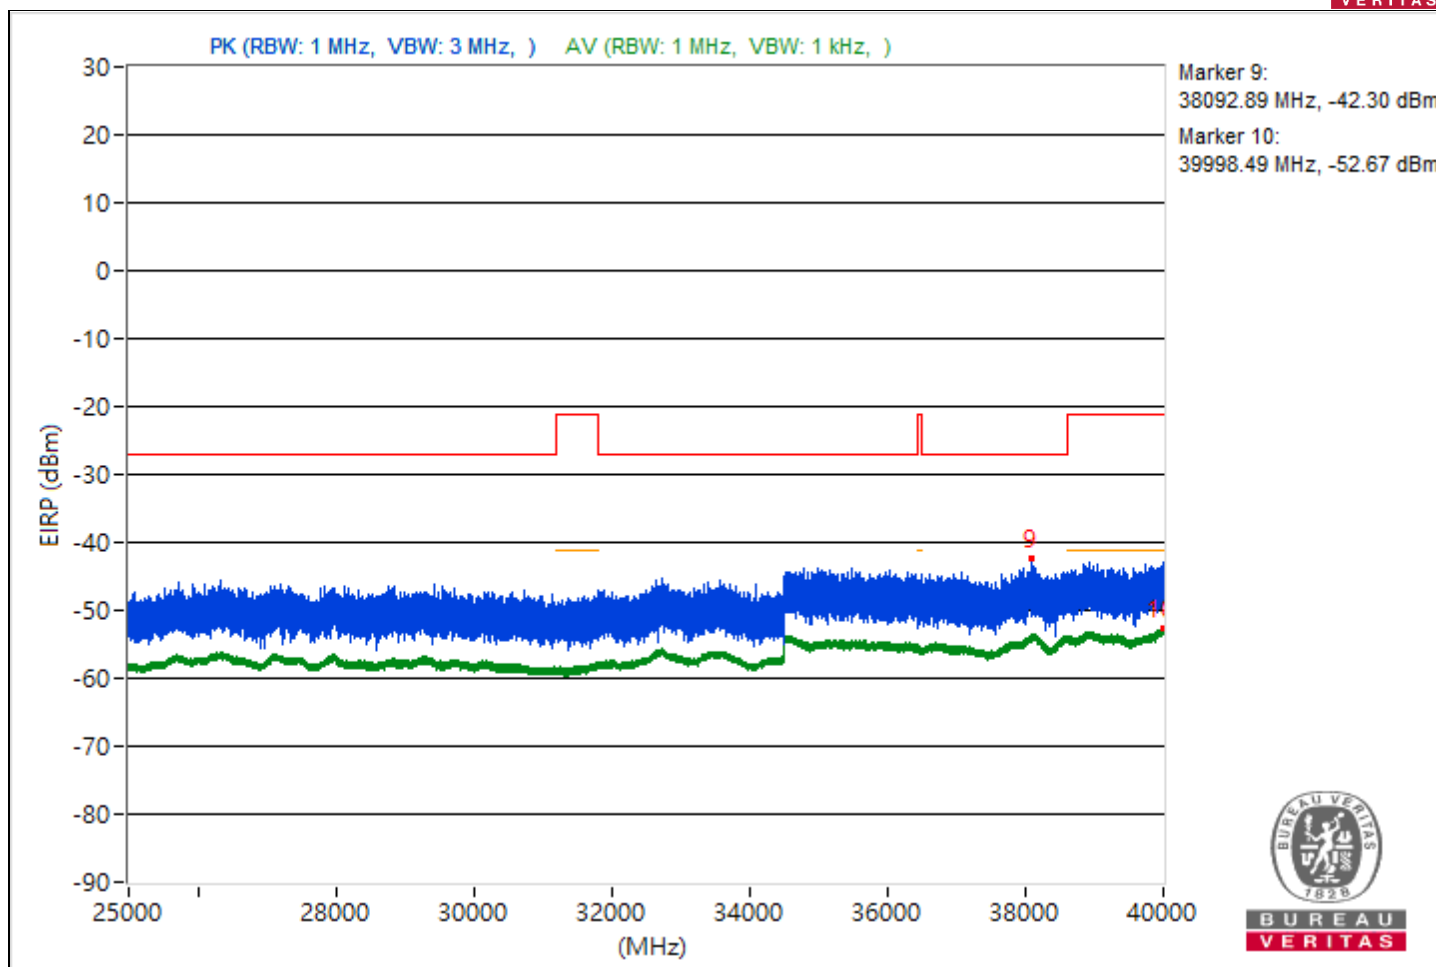





RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4485.61	54.53 PK	68.26	-13.73	-52.03	-46.78	4.92	-40.73
2	3824.27	47.47 AV	54	-6.53	-55.43	-56.03	4.92	-47.79
3	#5900.62	66.72 PK	68.26	-1.54	-35.08	-38.54	4.92	-28.54
4	11587.56	44.49 AV	54	-9.51	-59.51	-58.02	4.92	-50.77
5	#14545.6	56.33 PK	68.26	-11.93	-44.77	-51.05	4.92	-38.93
6	18748.9	46.51 AV	54	-7.49	-56.6	-56.76	4.92	-48.75
7	#24033.5	58.72 PK	68.26	-9.54	-43.03	-46.64	4.92	-36.54
8	23849.3	48.77 AV	54	-5.23	-54.16	-54.69	4.92	-46.49
9	#38127.11	52.01 PK	68.26	-16.25	-53.17	-49.82	4.92	-43.25
10	39997.69	42.63 AV	54	-11.37	-60.36	-60.77	4.92	-52.63

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

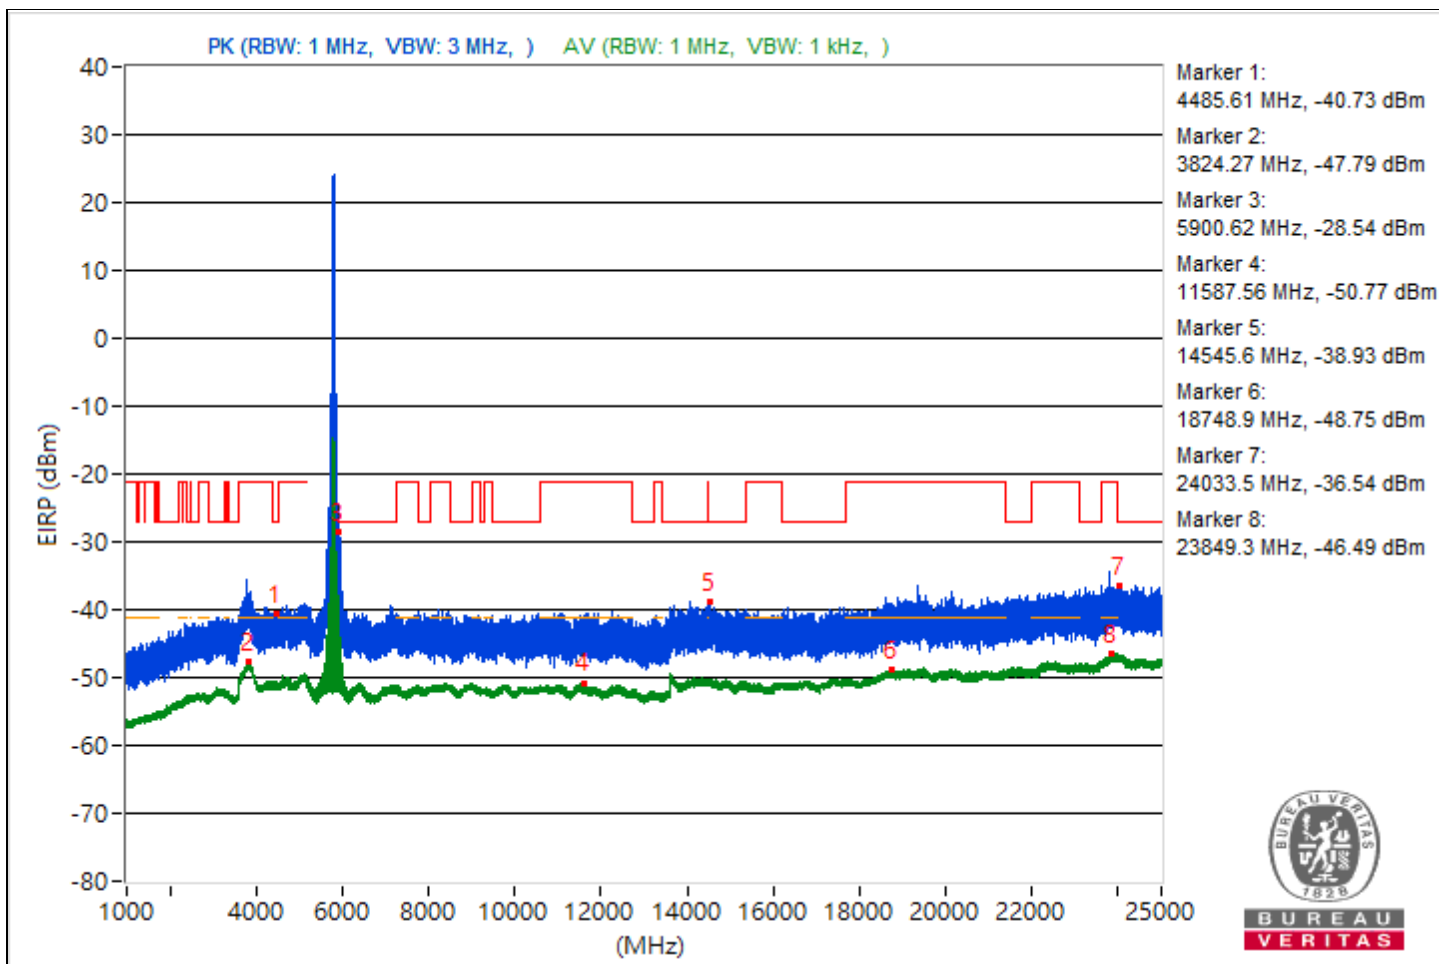

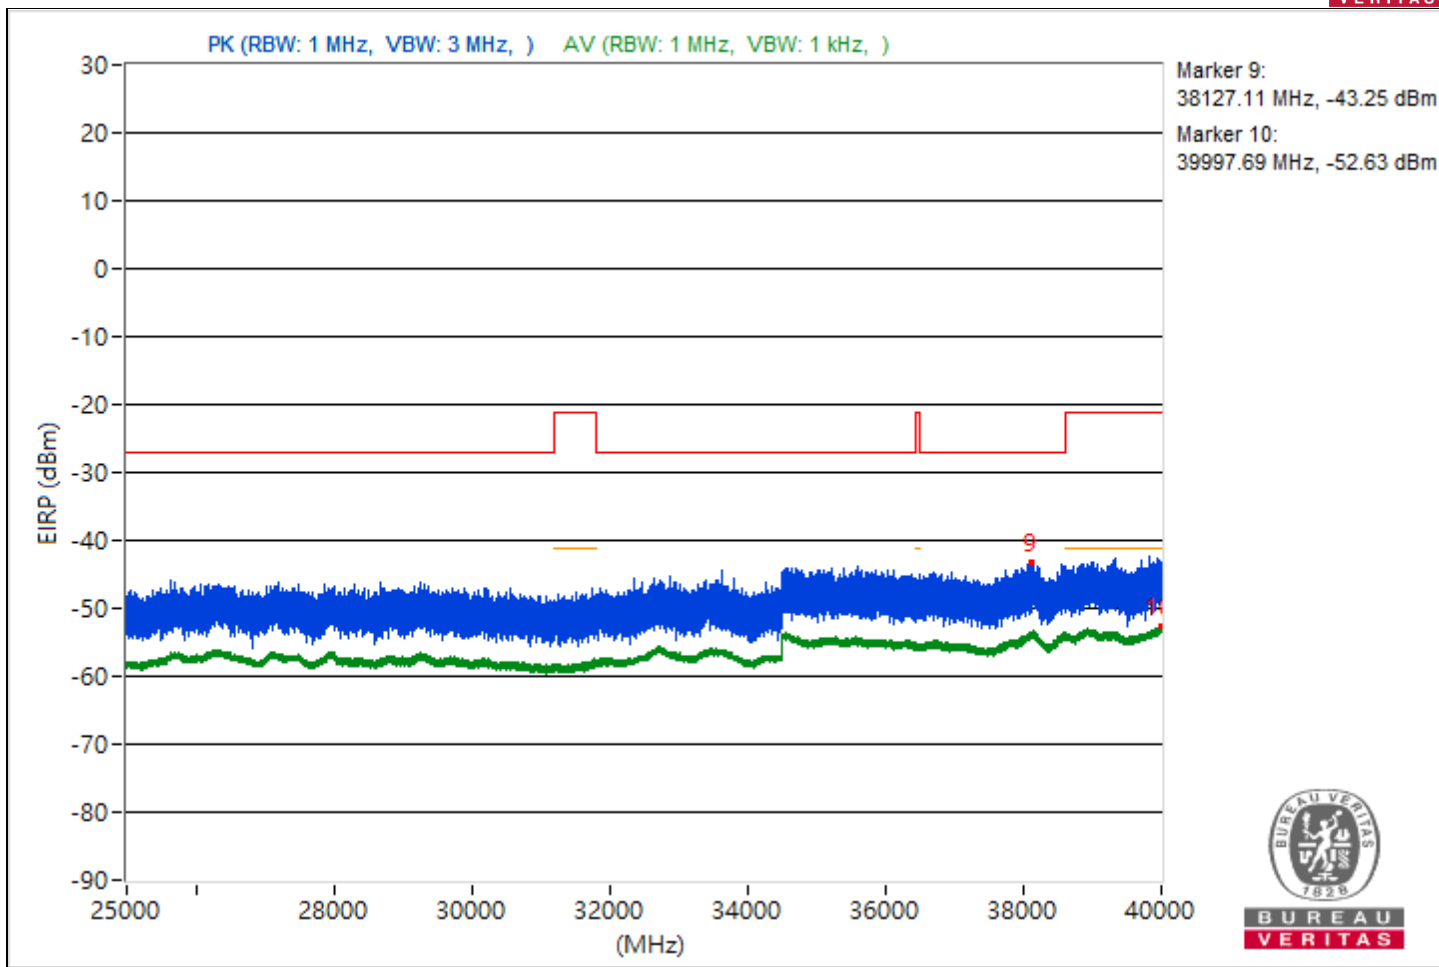



RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4468.5	54.61 PK	68.26	-13.65	-46.33	-53.52	4.92	-40.65
2	5095.62	47.45 AV	54	-6.55	-55.32	-56.21	4.92	-47.81
3	#7244.86	56.28 PK	68.26	-11.98	-45.43	-49.18	4.92	-38.98
4	11483.38	44.14 AV	54	-9.86	-58.57	-59.58	4.92	-51.12
5	#13613.07	57.04 PK	68.26	-11.22	-47.83	-44.95	4.92	-38.22
6	18810.8	46.33 AV	54	-7.67	-56.94	-56.78	4.92	-48.93
7	#24100.1	59.5 PK	68.26	-8.76	-46.04	-42.18	4.92	-35.76
8	23864.9	48.65 AV	54	-5.35	-54.76	-54.32	4.92	-46.61
9	#34740.53	51.71 PK	68.26	-16.55	-55.14	-49.53	4.92	-43.55
10	39997.42	42.46 AV	54	-11.54	-60.93	-60.53	4.92	-52.8

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

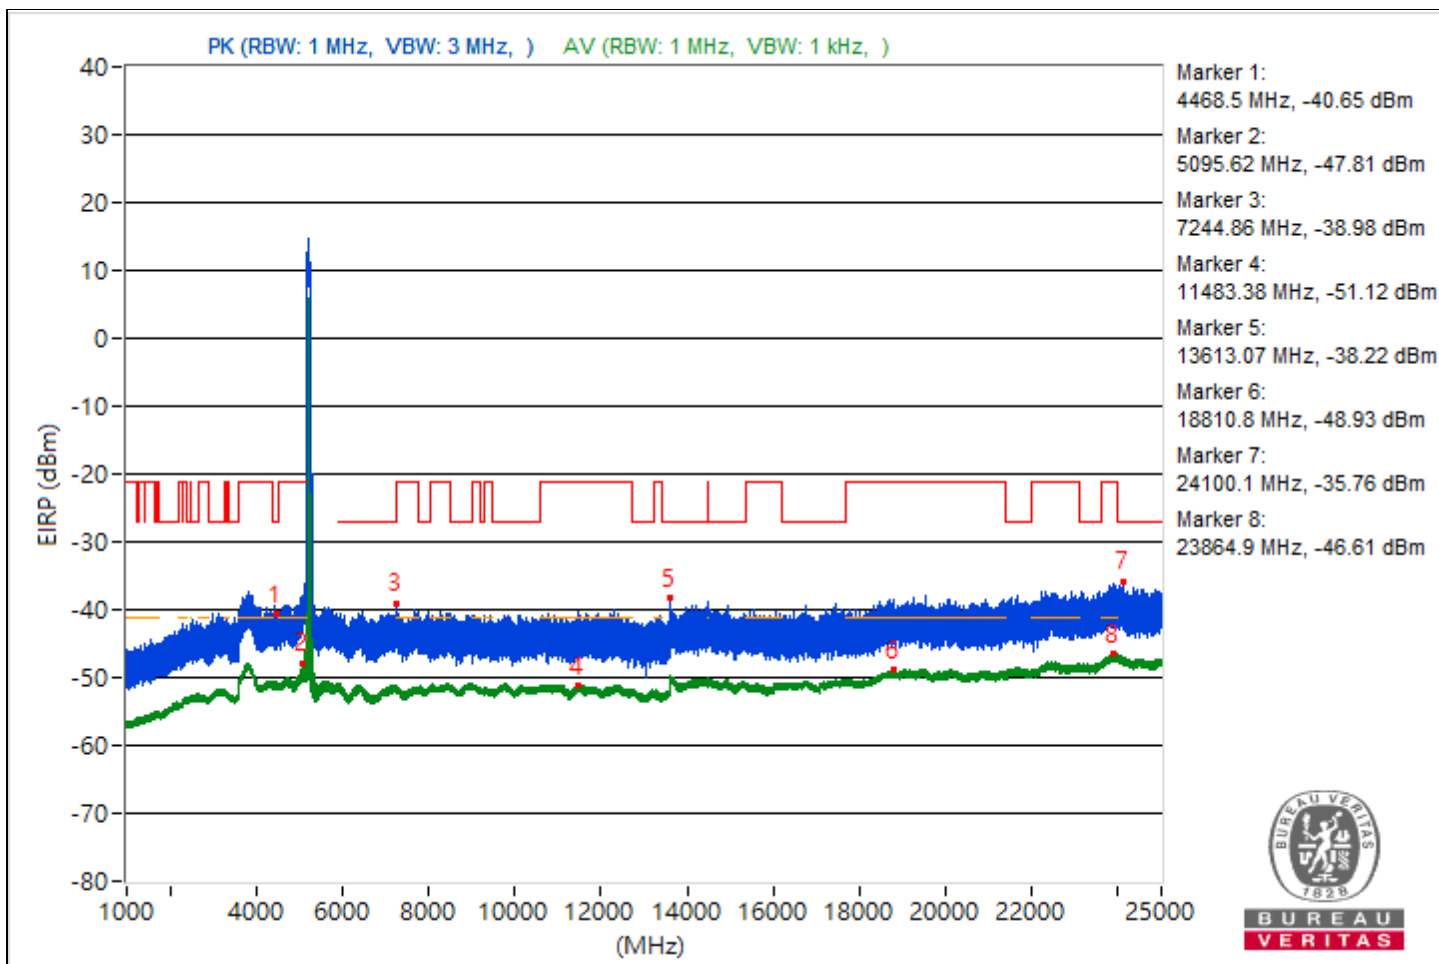

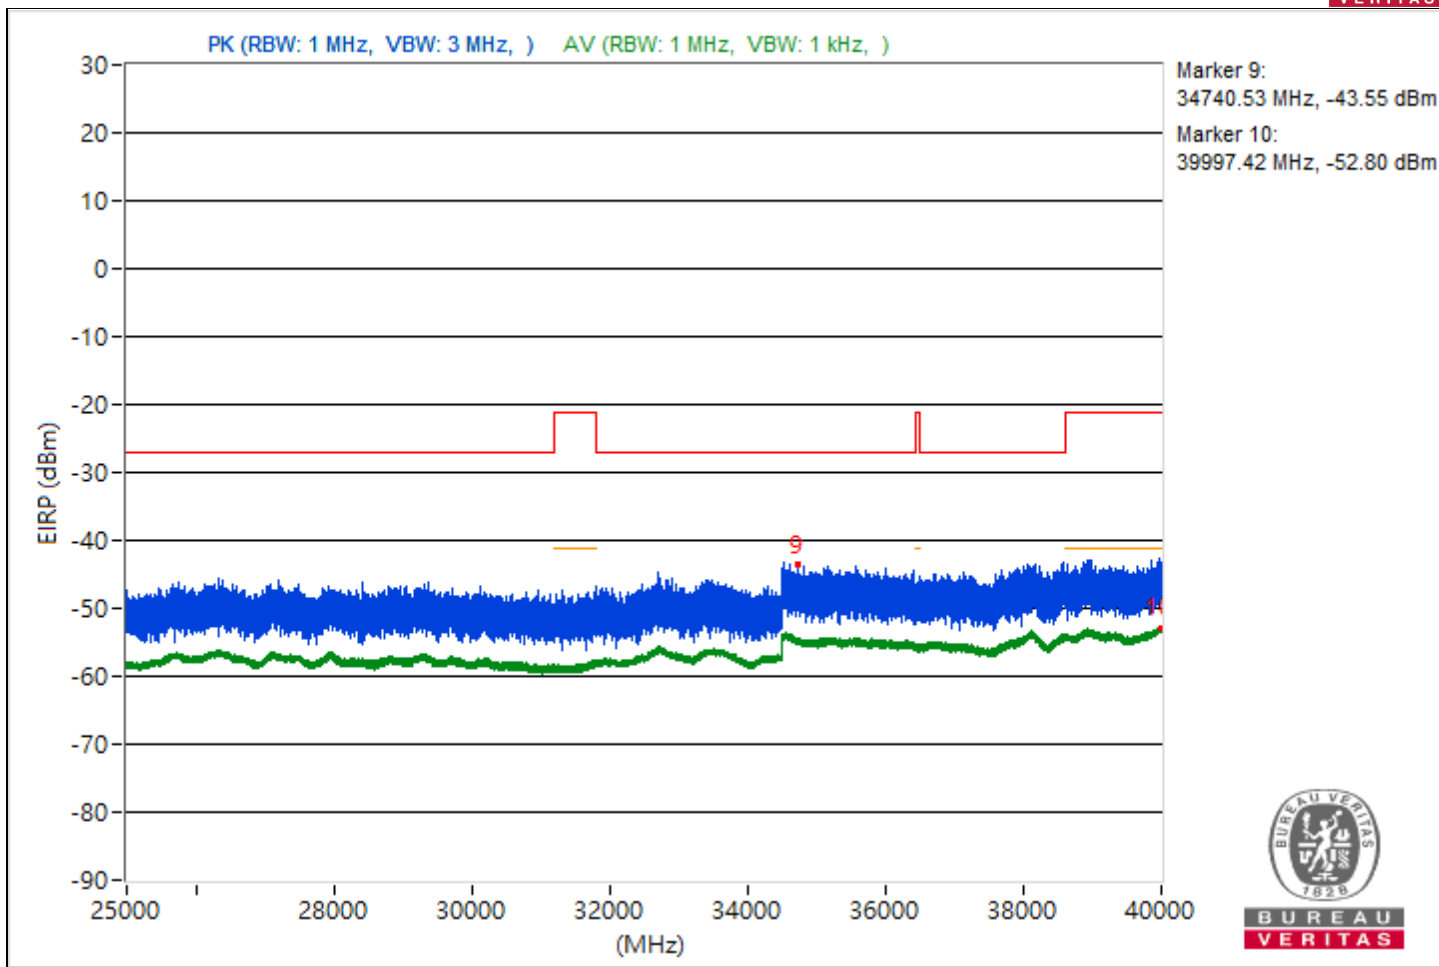



RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4416	55.23 PK	68.26	-13.03	-46.4	-50.44	4.92	-40.03
2	3838.5	47.36 AV	54	-6.64	-55.38	-56.33	4.92	-47.9
3	#5905.29	65.45 PK	68.26	-2.81	-35.49	-42.71	4.92	-29.81
4	11524.53	44.34 AV	54	-9.66	-59.4	-58.35	4.92	-50.92
5	#14443.47	56.37 PK	68.26	-11.89	-45.28	-49.21	4.92	-38.89
6	18759.9	46.29 AV	54	-7.71	-56.59	-57.24	4.92	-48.97
7	#24005.3	58.5 PK	68.26	-9.76	-42.61	-48.8	4.92	-36.76
8	23865.2	48.63 AV	54	-5.37	-54.14	-55.03	4.92	-46.63
9	#38119.47	52.79 PK	68.26	-15.47	-48.67	-53.31	4.92	-42.47
10	39994.58	42.6 AV	54	-11.4	-60.23	-61	4.92	-52.66

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

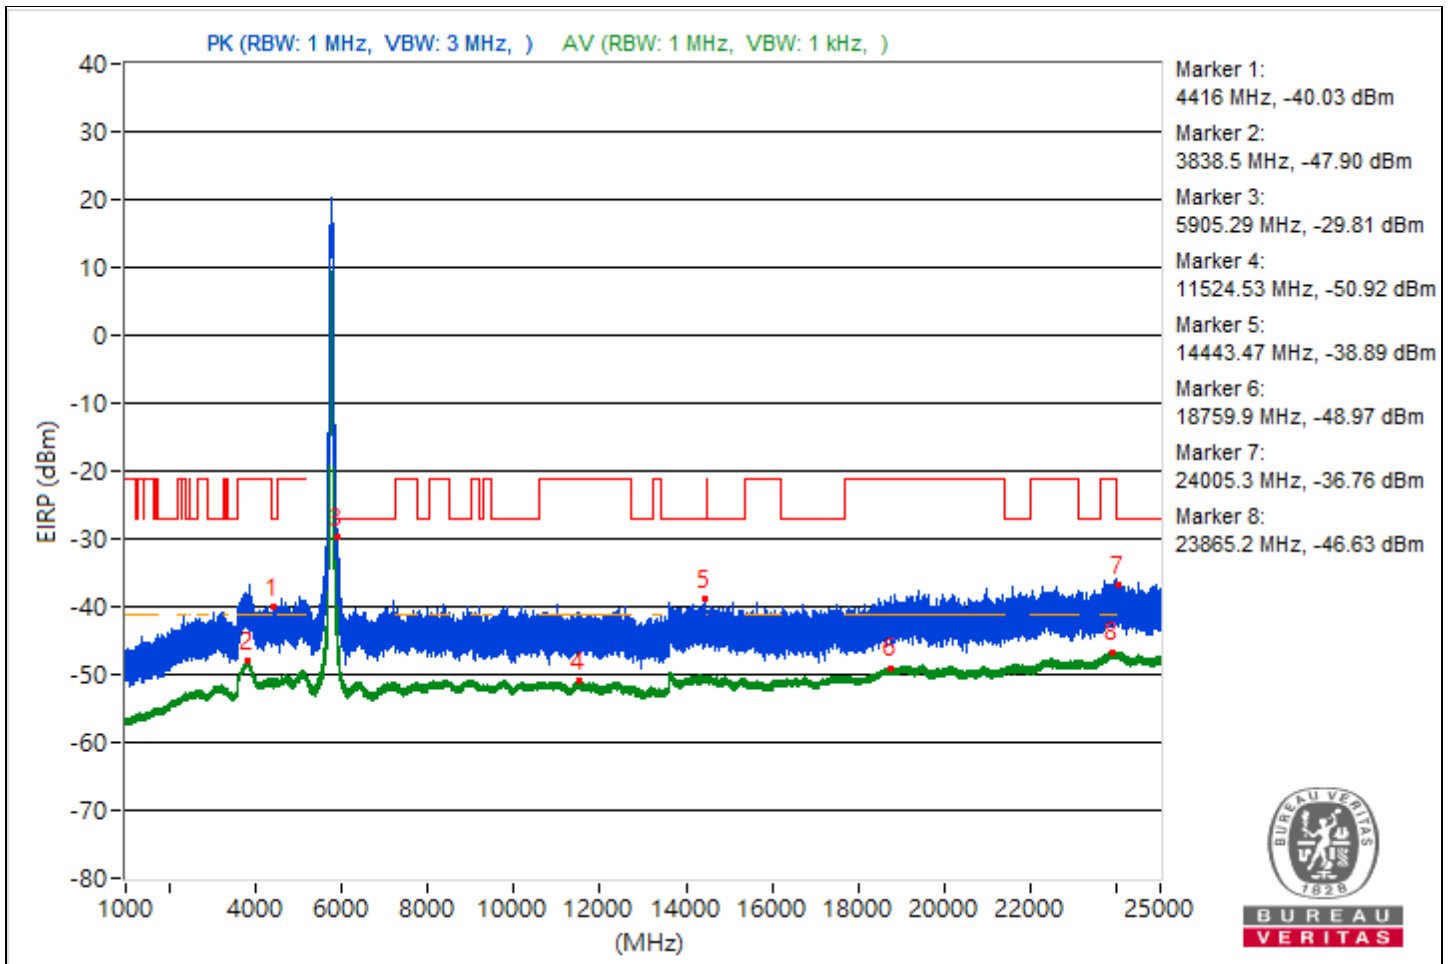

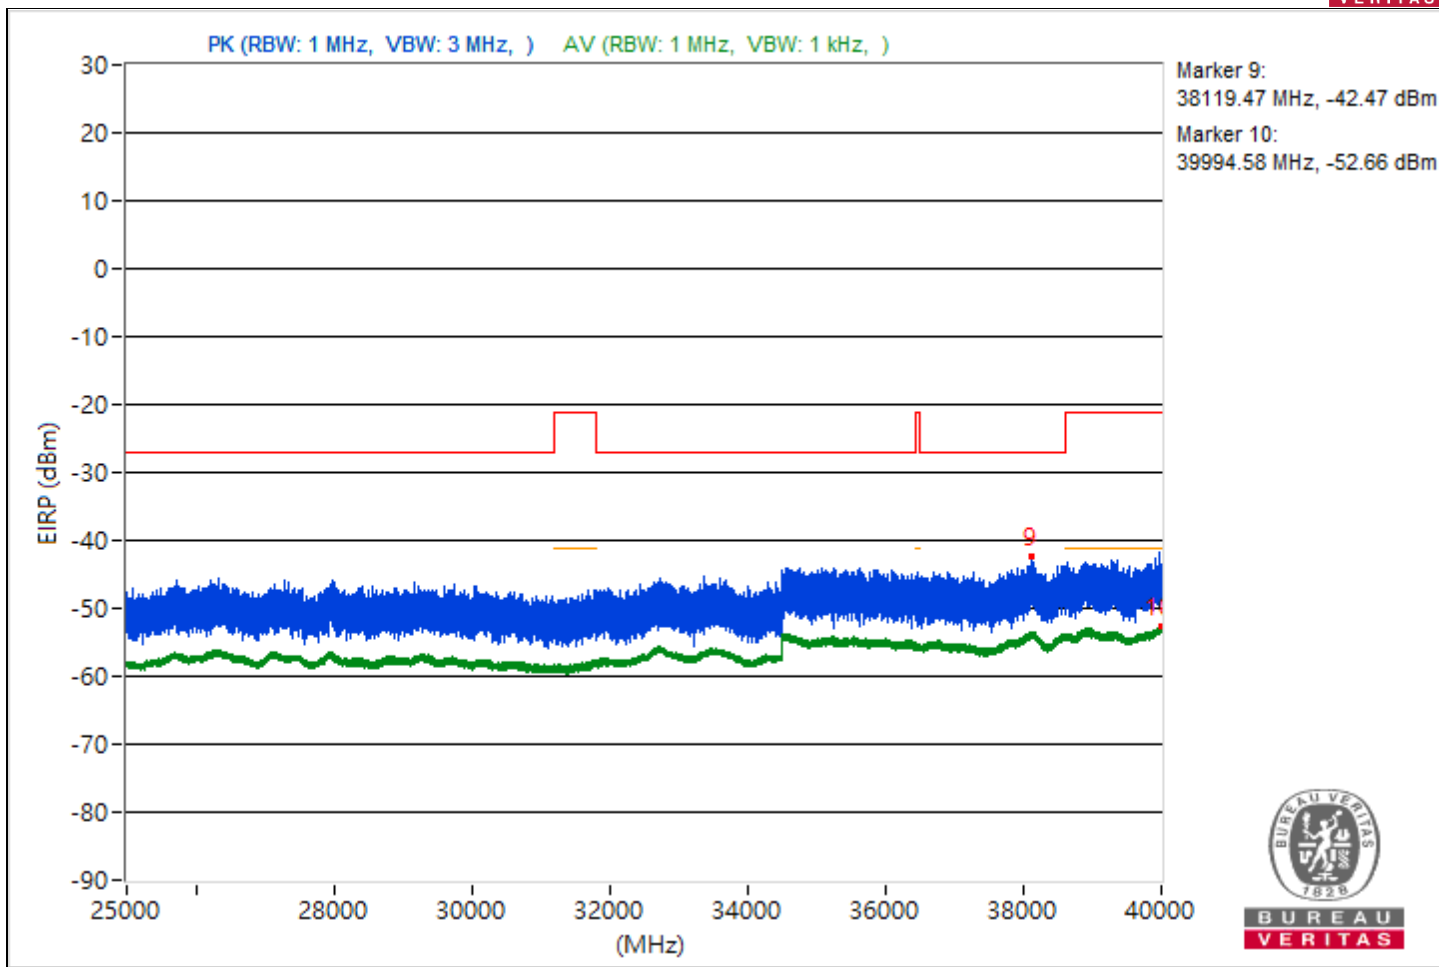



RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4482.73	55.31 PK	68.26	-12.95	-49.41	-46.76	4.92	-39.95
2	3828.86	47.44 AV	54	-6.56	-56.15	-55.39	4.92	-47.82
3	#8909.87	54.93 PK	68.26	-13.33	-50.39	-46.84	4.92	-40.33
4	9064.18	44.74 AV	54	-9.26	-58.99	-57.98	4.92	-50.52
5	#17343.2	56.29 PK	68.26	-11.97	-45.36	-49.29	4.92	-38.97
6	18819.7	46.68 AV	54	-7.32	-56.89	-56.16	4.92	-48.58
7	#24939.8	58.81 PK	68.26	-9.45	-43	-46.41	4.92	-36.45
8	23806.6	48.89 AV	54	-5.11	-55.12	-53.61	4.92	-46.37
9	#36046.13	51.83 PK	68.26	-16.43	-55.64	-49.25	4.92	-43.43
10	39983.56	42.9 AV	54	-11.1	-59.82	-60.83	4.92	-52.36

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

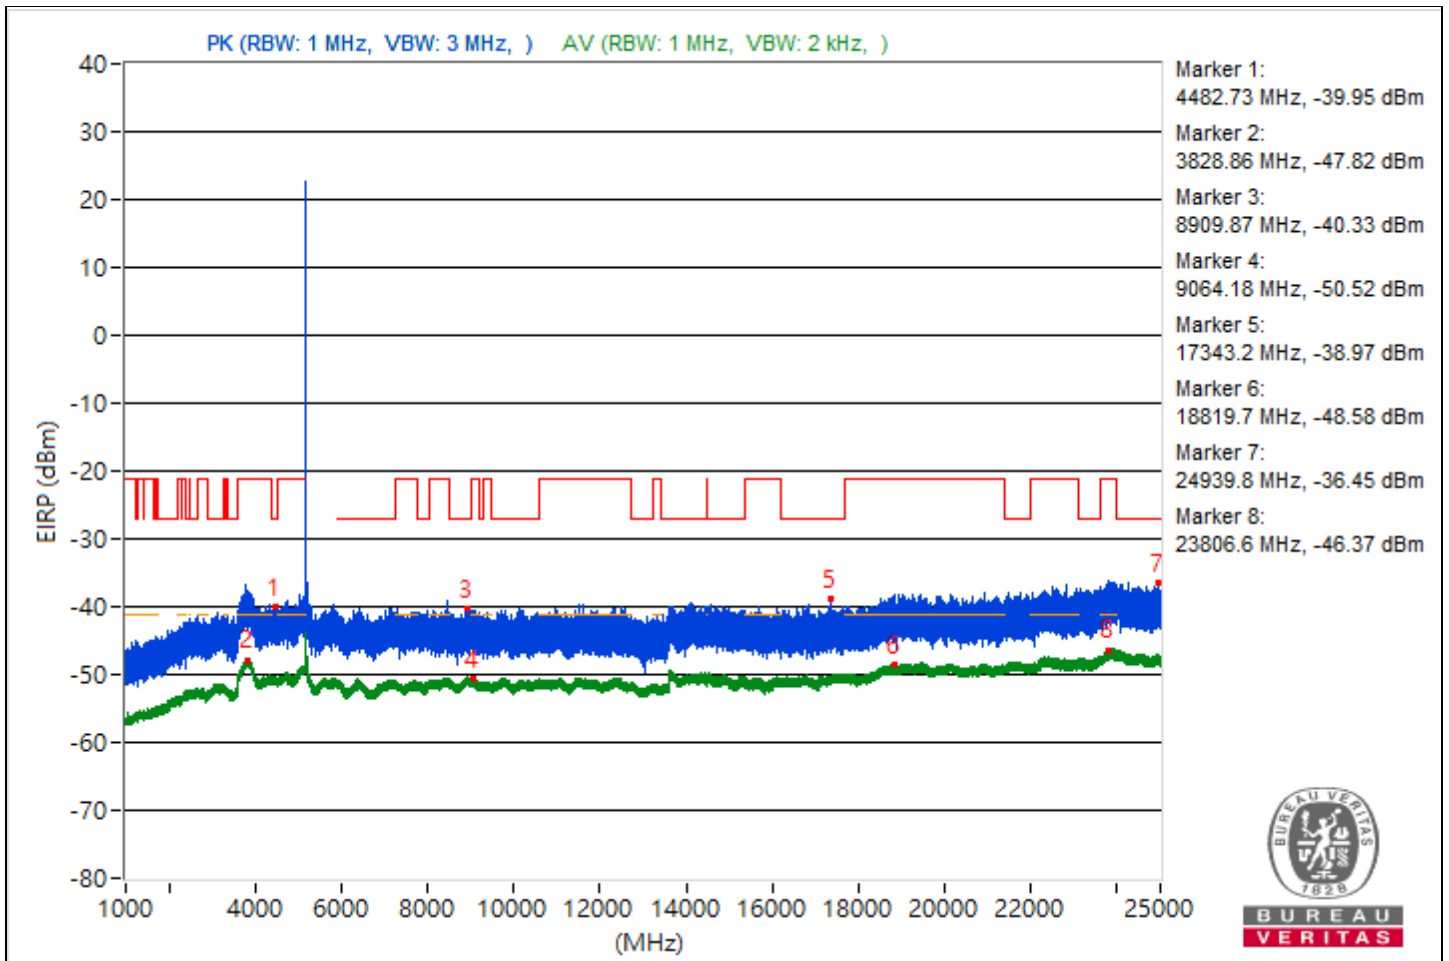

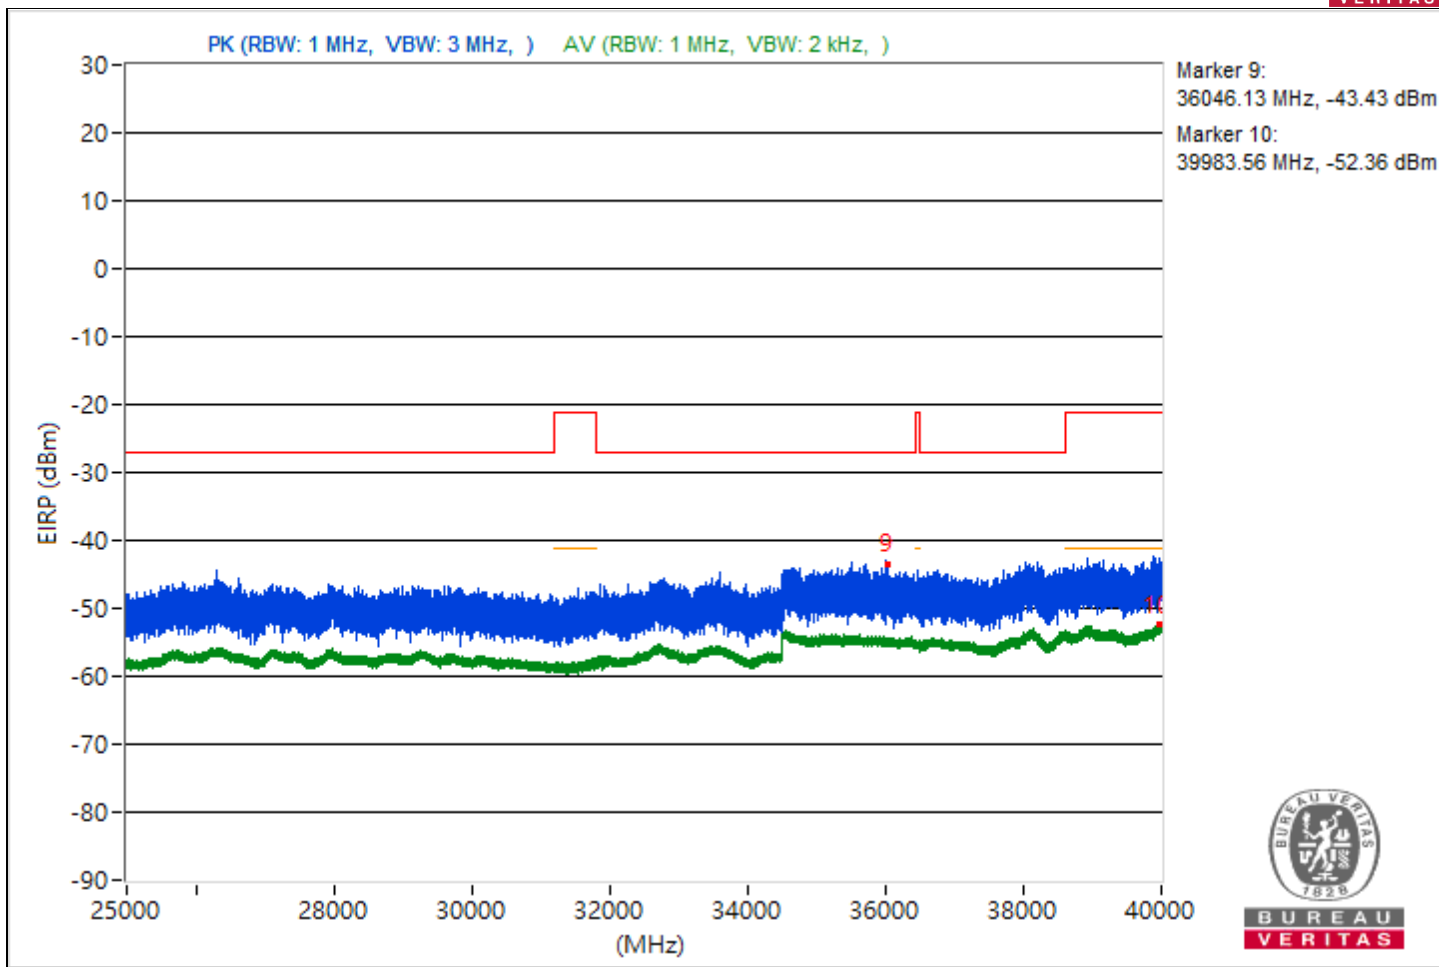





RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4439.41	54.67 PK	68.26	-13.59	-46.75	-51.58	4.92	-40.59
2	3823.33	47.4 AV	54	-6.6	-56.16	-55.45	4.92	-47.86
3	#9762.58	55.46 PK	68.26	-12.8	-46.1	-50.38	4.92	-39.8
4	11503.38	44.65 AV	54	-9.35	-59.11	-58.04	4.92	-50.61
5	#13611.2	55.85 PK	68.26	-12.41	-45.9	-49.5	4.92	-39.41
6	18978.5	46.58 AV	54	-7.42	-56.27	-56.99	4.92	-48.68
7	#24161.5	59.37 PK	68.26	-8.89	-49.4	-41.46	4.92	-35.89
8	23878.7	49.13 AV	54	-4.87	-53.57	-54.61	4.92	-46.13
9	#38487.02	51.9 PK	68.26	-16.36	-55.27	-49.25	4.92	-43.36
10	39947.38	42.67 AV	54	-11.33	-61.32	-59.84	4.92	-52.59

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

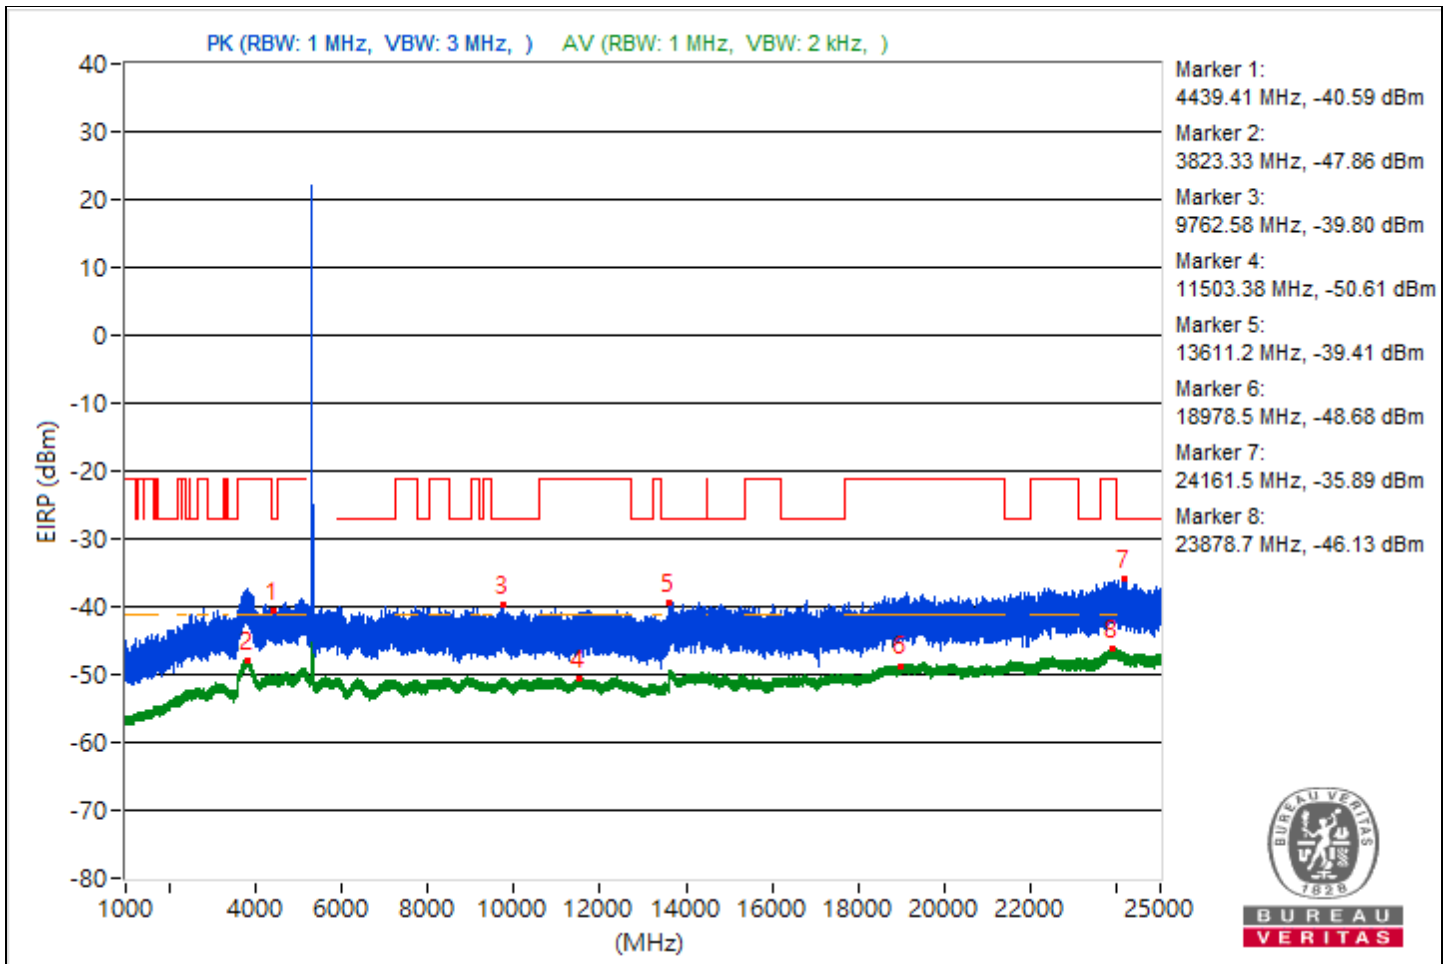

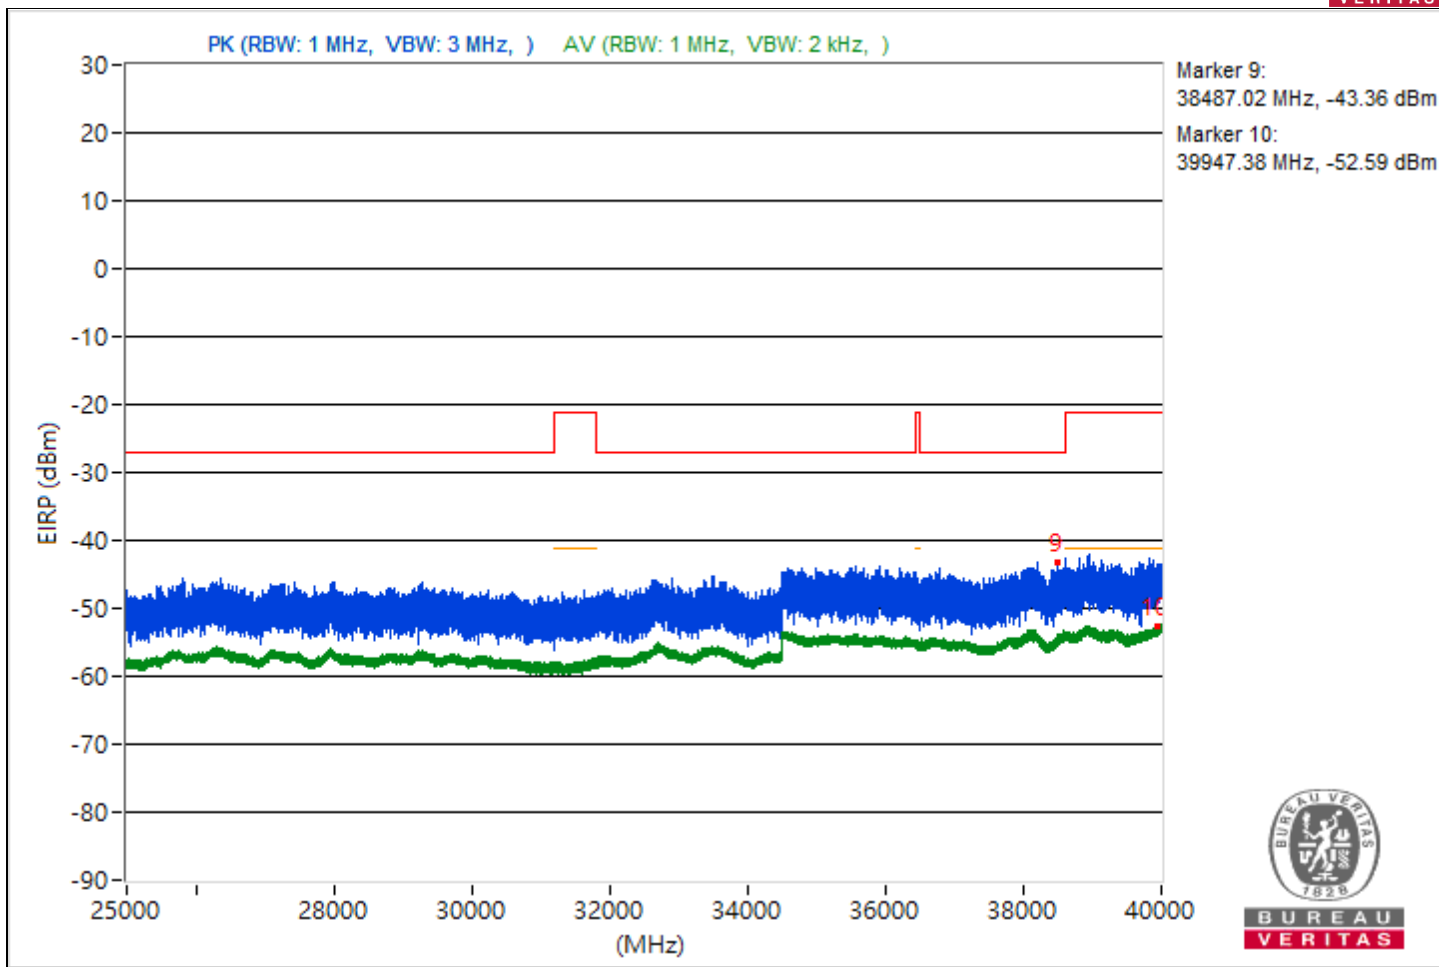



RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4487.63	55.02 PK	68.26	-13.24	-50.69	-46.59	4.92	-40.24
2	3826.29	47.48 AV	54	-6.52	-56.17	-55.3	4.92	-47.78
3	#8848.8	55.32 PK	68.26	-12.94	-45.72	-52.31	4.92	-39.94
4	9034.84	44.69 AV	54	-9.31	-57.96	-59.11	4.92	-50.57
5	#16303.1	56.66 PK	68.26	-11.6	-44.7	-49.78	4.92	-38.6
6	18976.2	46.58 AV	54	-7.42	-56.96	-56.29	4.92	-48.68
7	#24980.9	58.72 PK	68.26	-9.54	-42.77	-47.3	4.92	-36.54
8	23990.4	49.06 AV	54	-4.94	-54.36	-53.91	4.92	-46.2
9	#34813.69	51.75 PK	68.26	-16.51	-55.92	-49.28	4.92	-43.51
10	39998.67	42.95 AV	54	-11.05	-60.06	-60.44	4.92	-52.31

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

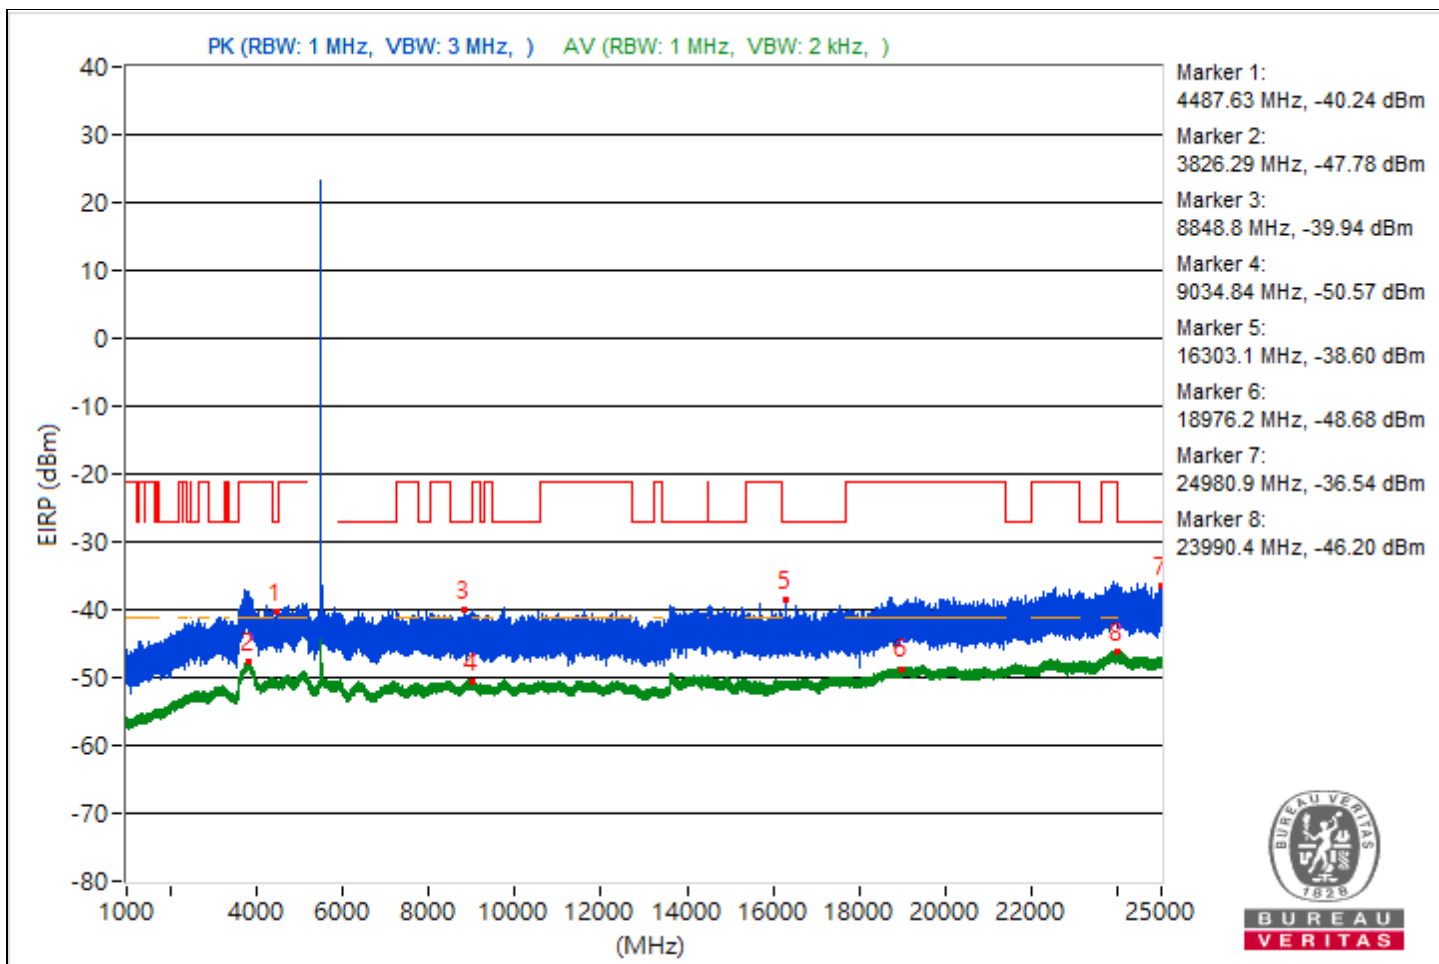

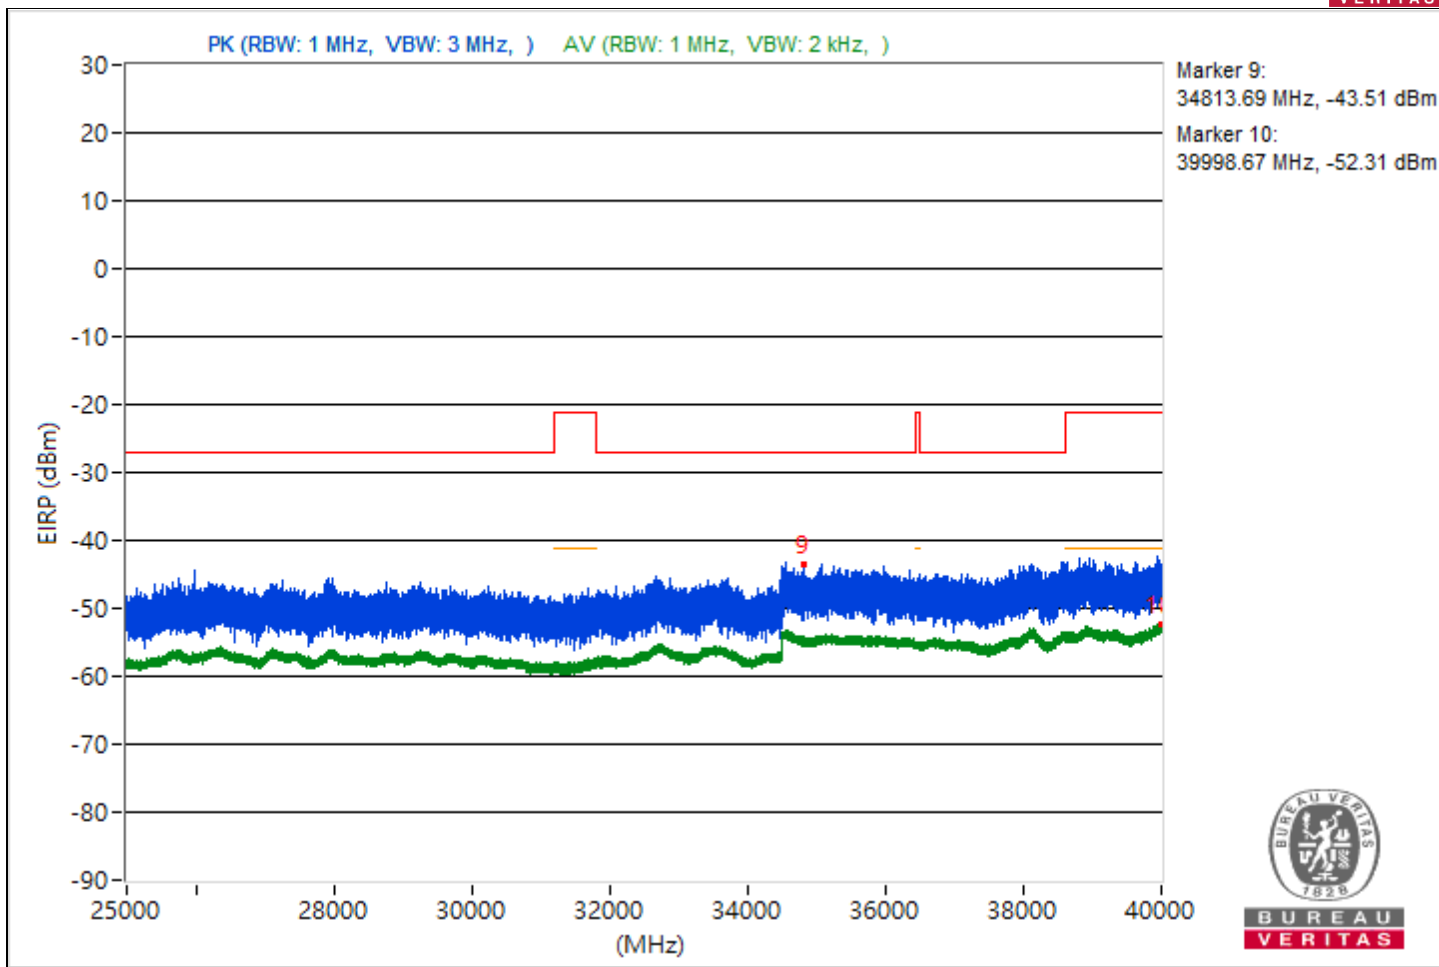



RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4423.7	55.22 PK	68.26	-13.04	-49.51	-46.85	4.92	-40.04
2	3798.99	47.66 AV	54	-6.34	-55.37	-55.7	4.92	-47.6
3	#8514.49	55.59 PK	68.26	-12.67	-46.08	-49.98	4.92	-39.67
4	8435.2	44.79 AV	54	-9.21	-58.91	-57.95	4.92	-50.47
5	#13913.96	56.22 PK	68.26	-12.04	-45.42	-49.39	4.92	-39.04
6	18990.4	46.66 AV	54	-7.34	-56.77	-56.3	4.92	-48.6
7	#24343.5	59.26 PK	68.26	-9	-42.83	-45.41	4.92	-36
8	23933.8	49.11 AV	54	-4.89	-54.32	-53.86	4.92	-46.15
9	#38123.47	52.21 PK	68.26	-16.05	-54.53	-49.06	4.92	-43.05
10	39994.04	43.17 AV	54	-10.83	-59.8	-60.26	4.92	-52.09

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

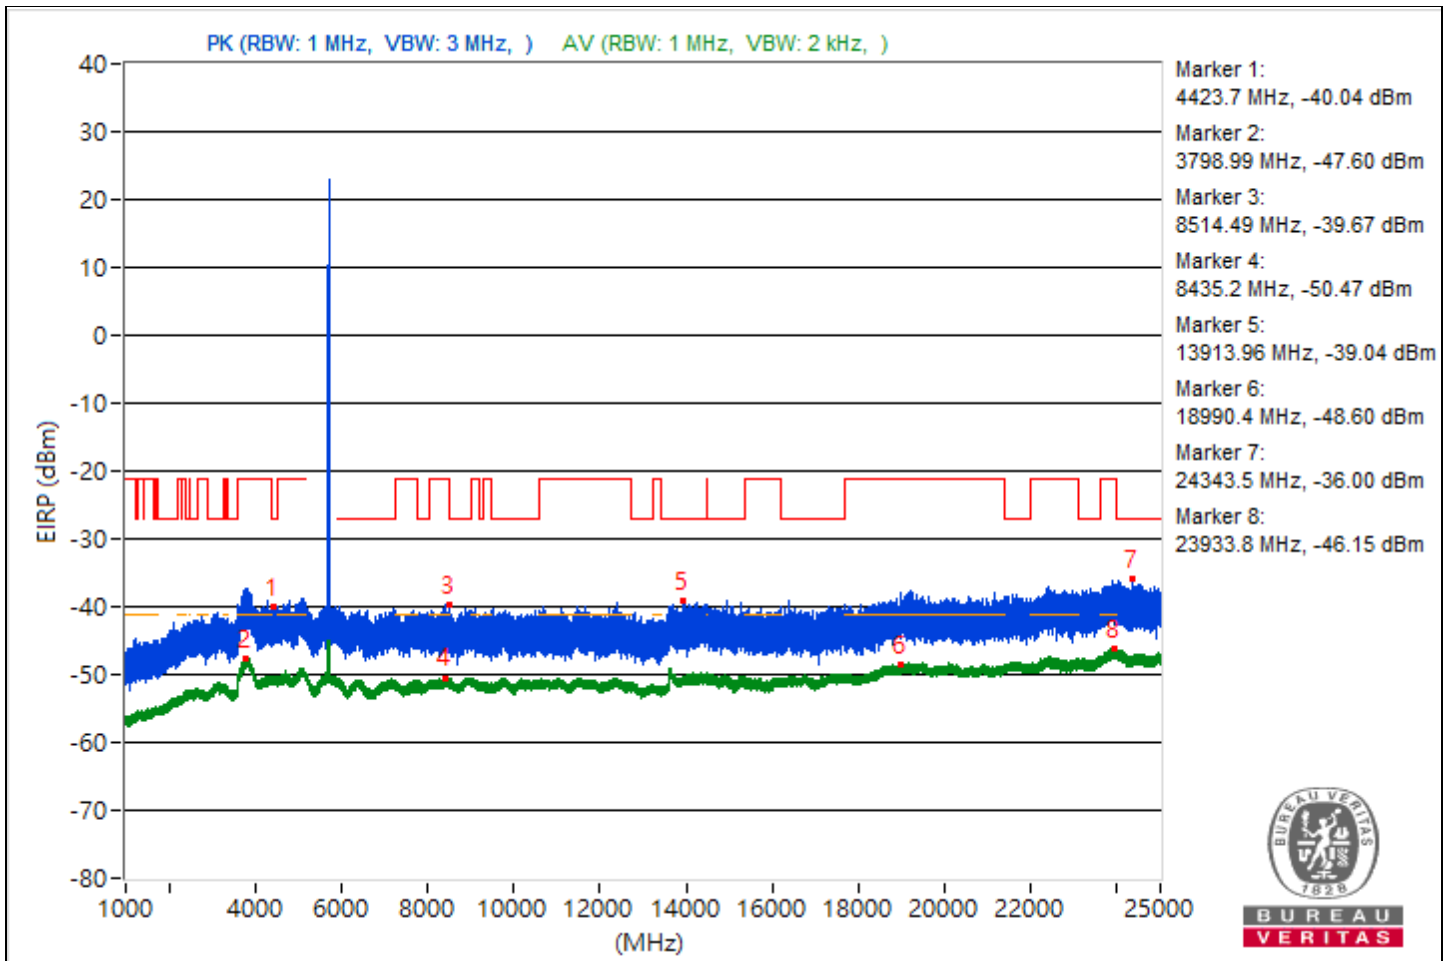

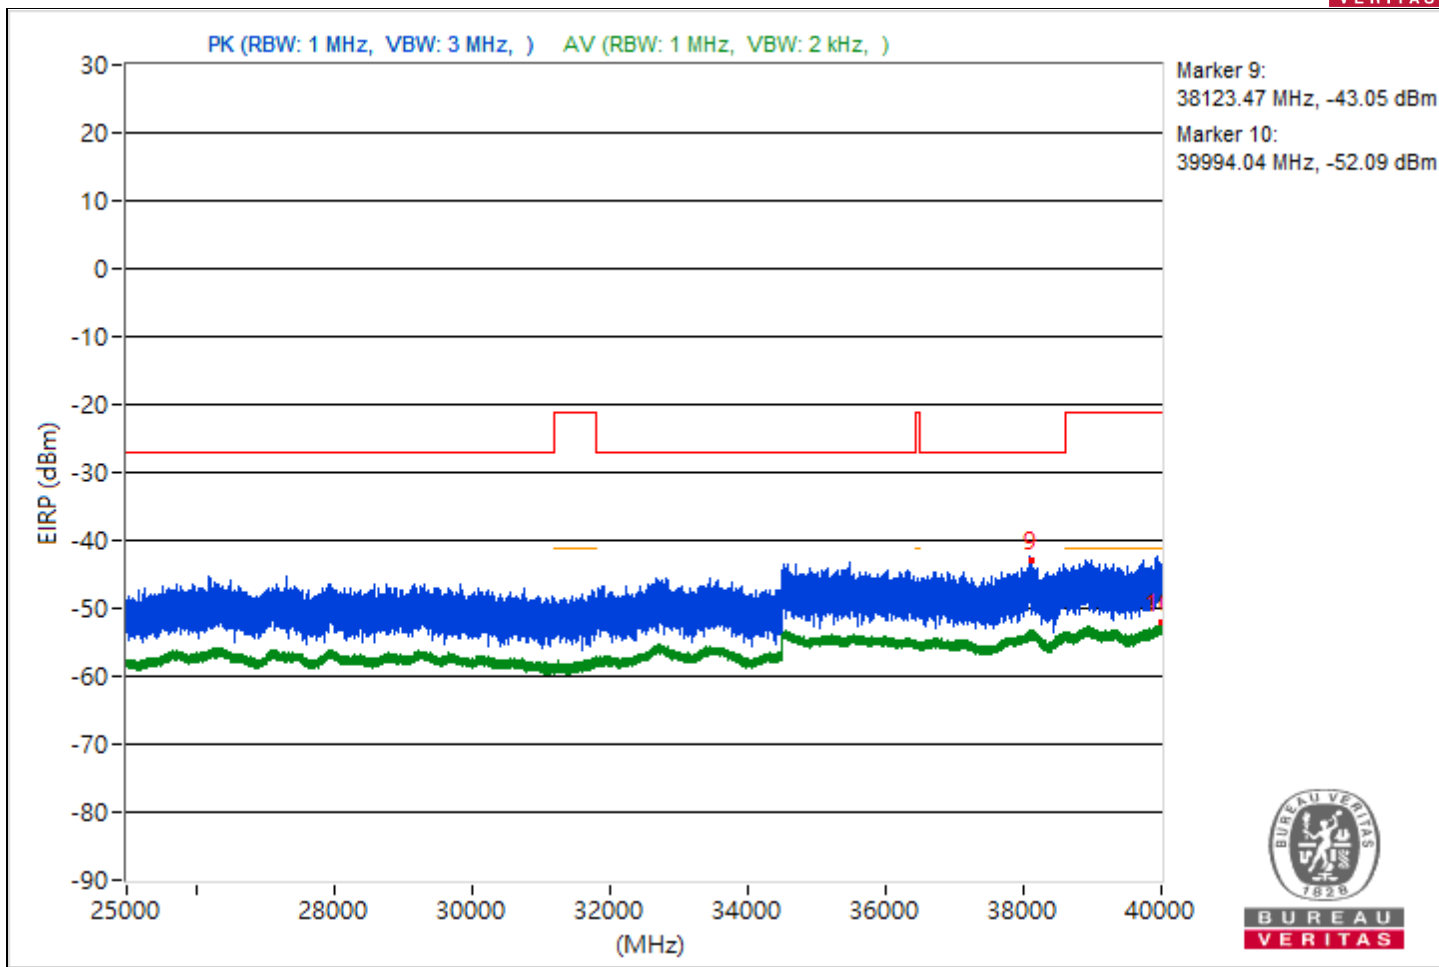



RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4490.12	54.39 PK	68.26	-13.87	-52.13	-46.93	4.92	-40.87
2	3819.68	47.55 AV	54	-6.45	-55.2	-56.12	4.92	-47.71
3	#6046.69	54.84 PK	68.26	-13.42	-51.4	-46.57	4.92	-40.42
4	12420.71	44.42 AV	54	-9.58	-59.81	-57.94	4.92	-50.84
5	#13682.58	57.24 PK	68.26	-11.02	-47.97	-44.58	4.92	-38.02
6	18978.3	46.66 AV	54	-7.34	-56.89	-56.21	4.92	-48.6
7	#24570.8	58.9 PK	68.26	-9.36	-46.44	-42.86	4.92	-36.36
8	23842.4	48.81 AV	54	-5.19	-54.04	-54.76	4.92	-46.45
9	#38113.24	52 PK	68.26	-16.26	-54.19	-49.44	4.92	-43.26
10	39984.98	42.76 AV	54	-11.24	-60.72	-60.15	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

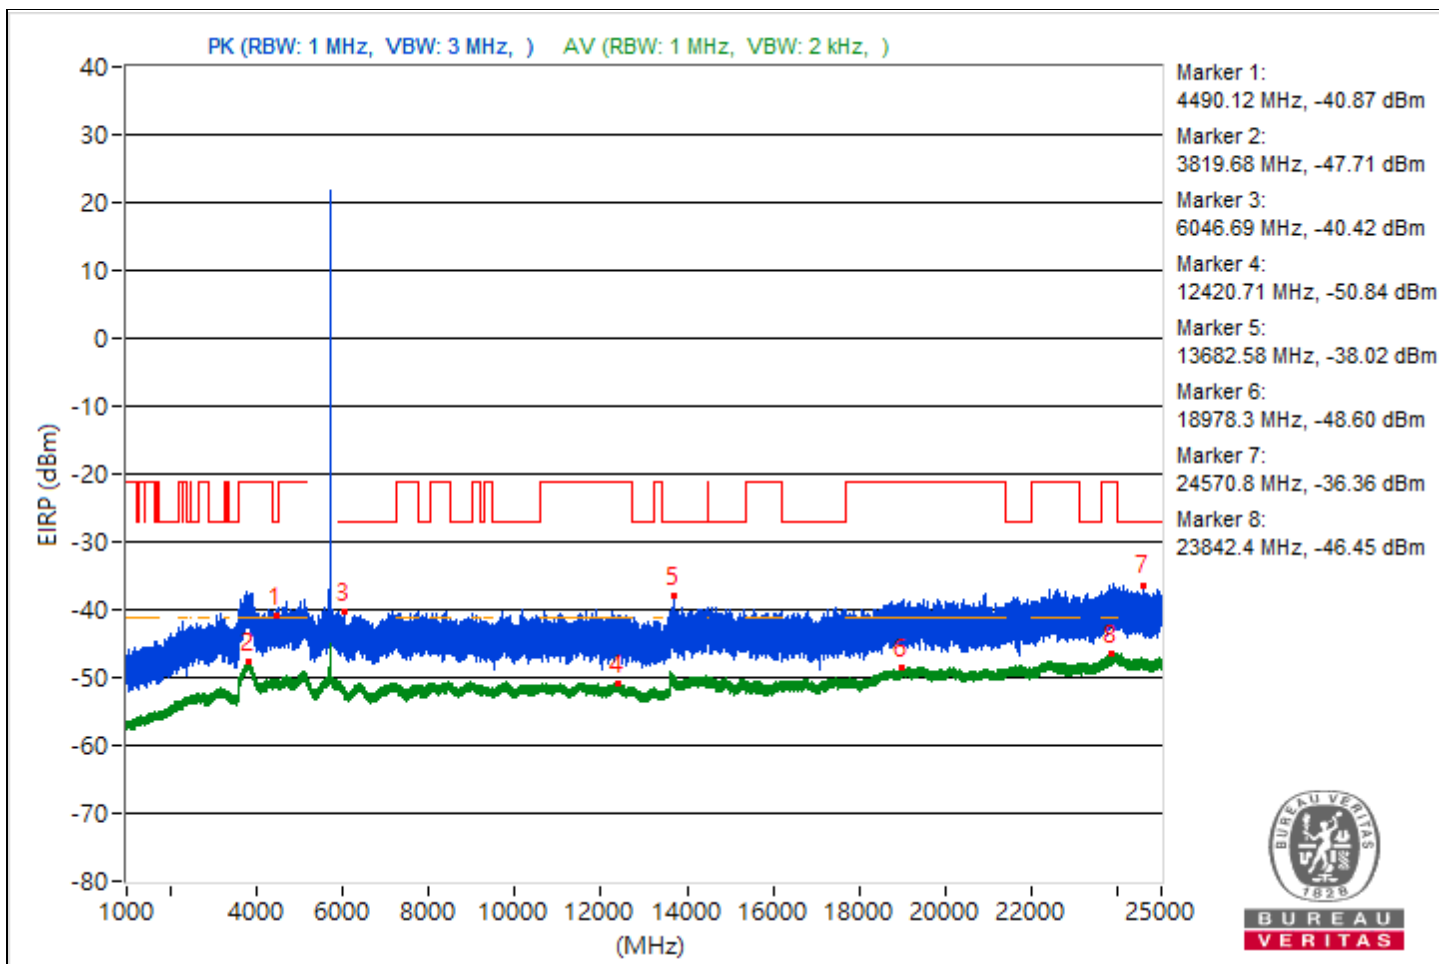

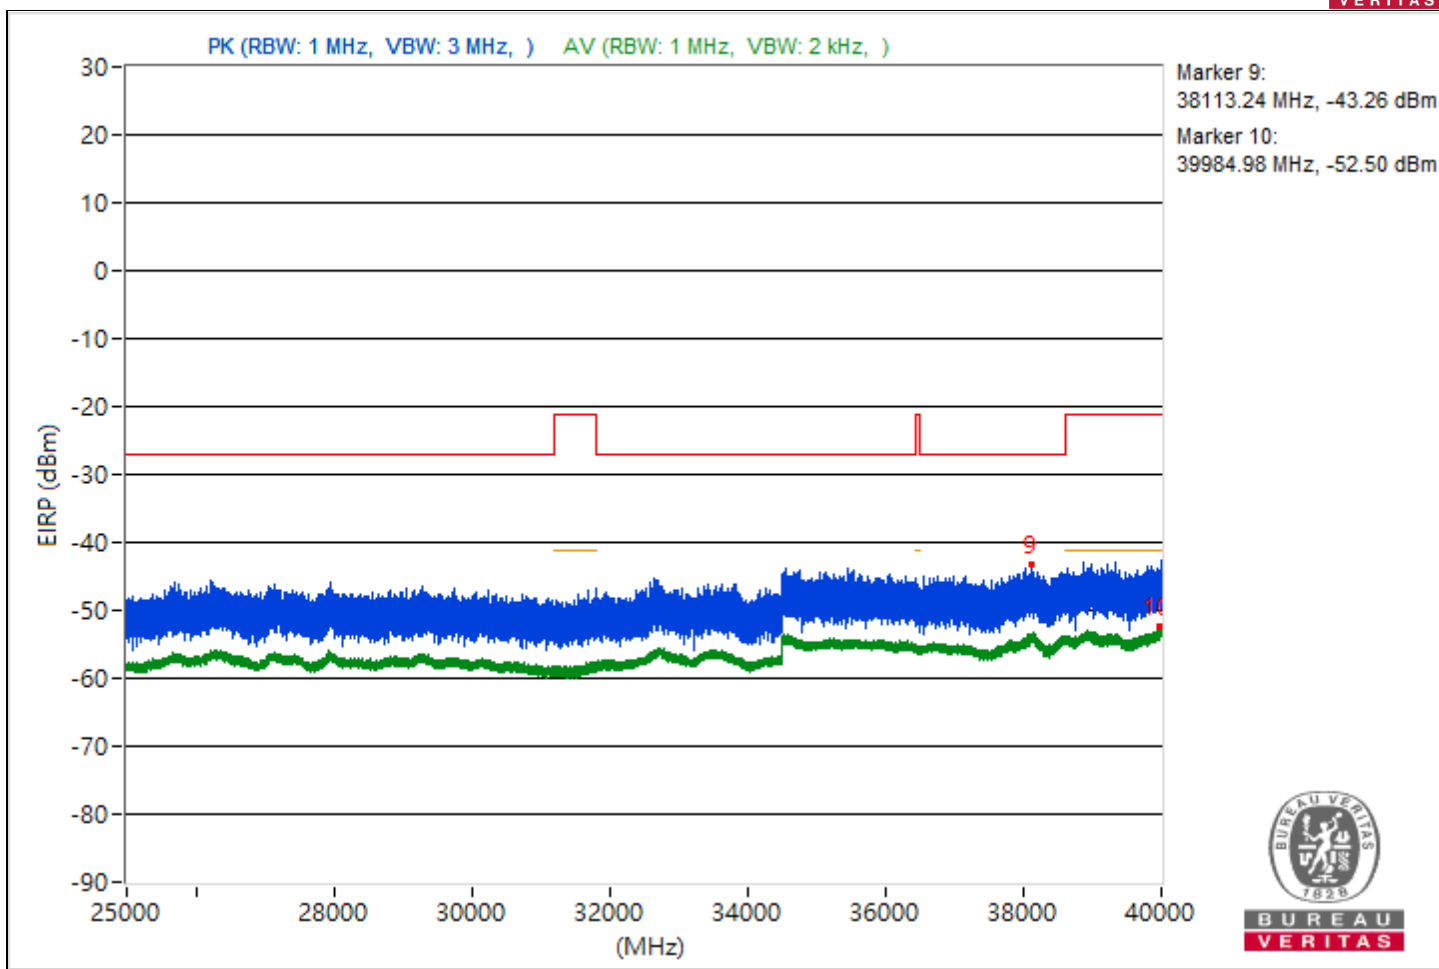





RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4440.89	55.37 PK	68.26	-12.89	-46.61	-49.5	4.92	-39.89
2	3815.56	47.66 AV	54	-6.34	-55.14	-55.95	4.92	-47.6
3	#5922.09	56.14 PK	68.26	-12.12	-45.57	-49.32	4.92	-39.12
4	11474.04	49.12 AV	54	-4.88	-54.58	-53.62	4.92	-46.14
5	#13667.38	55.97 PK	68.26	-12.29	-45.45	-50.27	4.92	-39.29
6	18684.3	46.53 AV	54	-7.47	-57.14	-56.23	4.92	-48.73
7	#24092.7	58.91 PK	68.26	-9.35	-47.75	-42.38	4.92	-36.35
8	23895.1	49.12 AV	54	-4.88	-54.31	-53.84	4.92	-46.14
9	#38597.24	53.32 PK	68.26	-14.94	-51.61	-48.62	4.92	-41.94
10	39990.58	42.91 AV	54	-11.09	-59.96	-60.62	4.92	-52.35

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

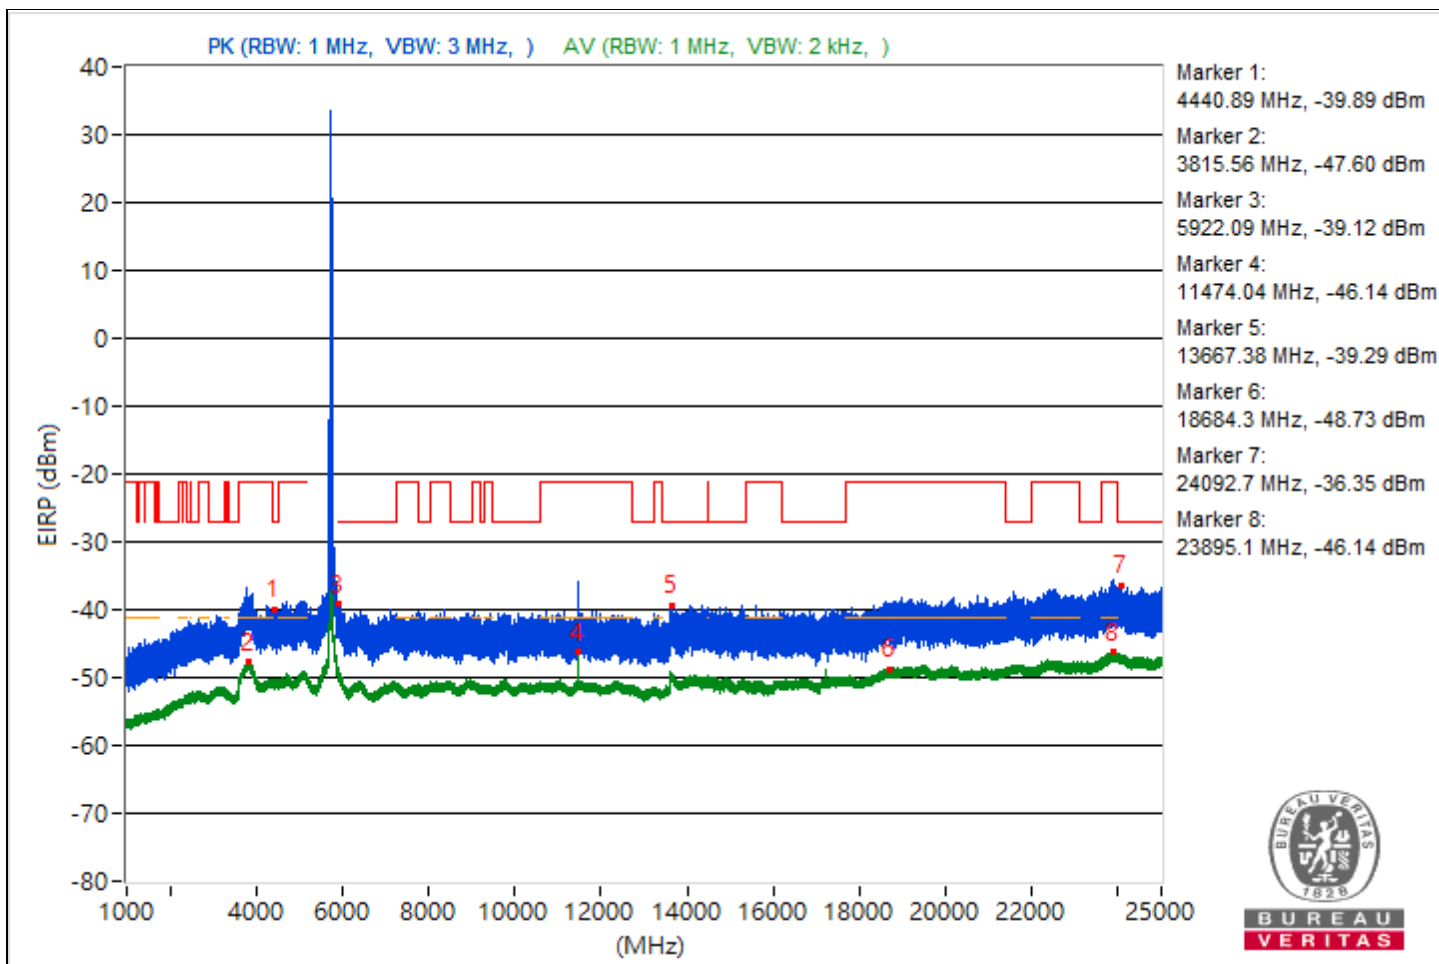

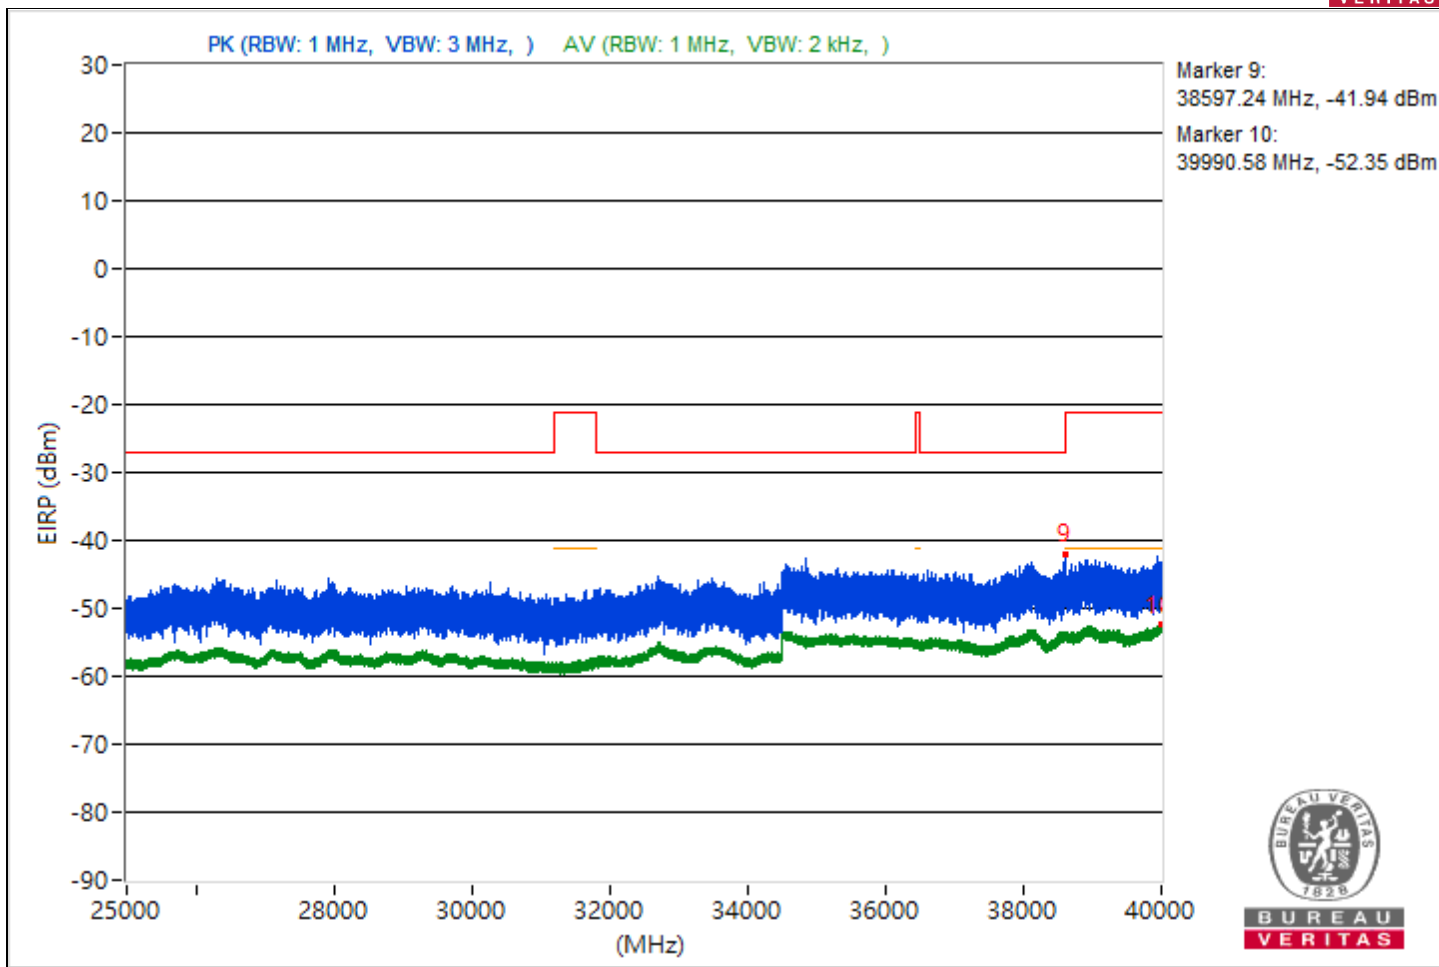



RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4487.32	55.07 PK	68.26	-13.19	-50.55	-46.57	4.92	-40.19
2	3790.04	47.43 AV	54	-6.57	-55.22	-56.38	4.92	-47.83
3	#5902.72	58.61 PK	68.26	-9.65	-42.57	-48.46	4.92	-36.65
4	11667.73	49.67 AV	54	-4.33	-55.9	-51.99	4.92	-45.59
5	#16296	55.68 PK	68.26	-12.58	-45.08	-53.54	4.92	-39.58
6	18977.5	46.49 AV	54	-7.51	-57.52	-56	4.92	-48.77
7	#24020.3	59.5 PK	68.26	-8.76	-47.24	-41.77	4.92	-35.76
8	23842.8	48.77 AV	54	-5.23	-55.1	-53.83	4.92	-46.49
9	#38071.11	51.78 PK	68.26	-16.48	-54.21	-49.73	4.92	-43.48
10	39980.09	42.61 AV	54	-11.39	-60	-61.26	4.92	-52.65

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

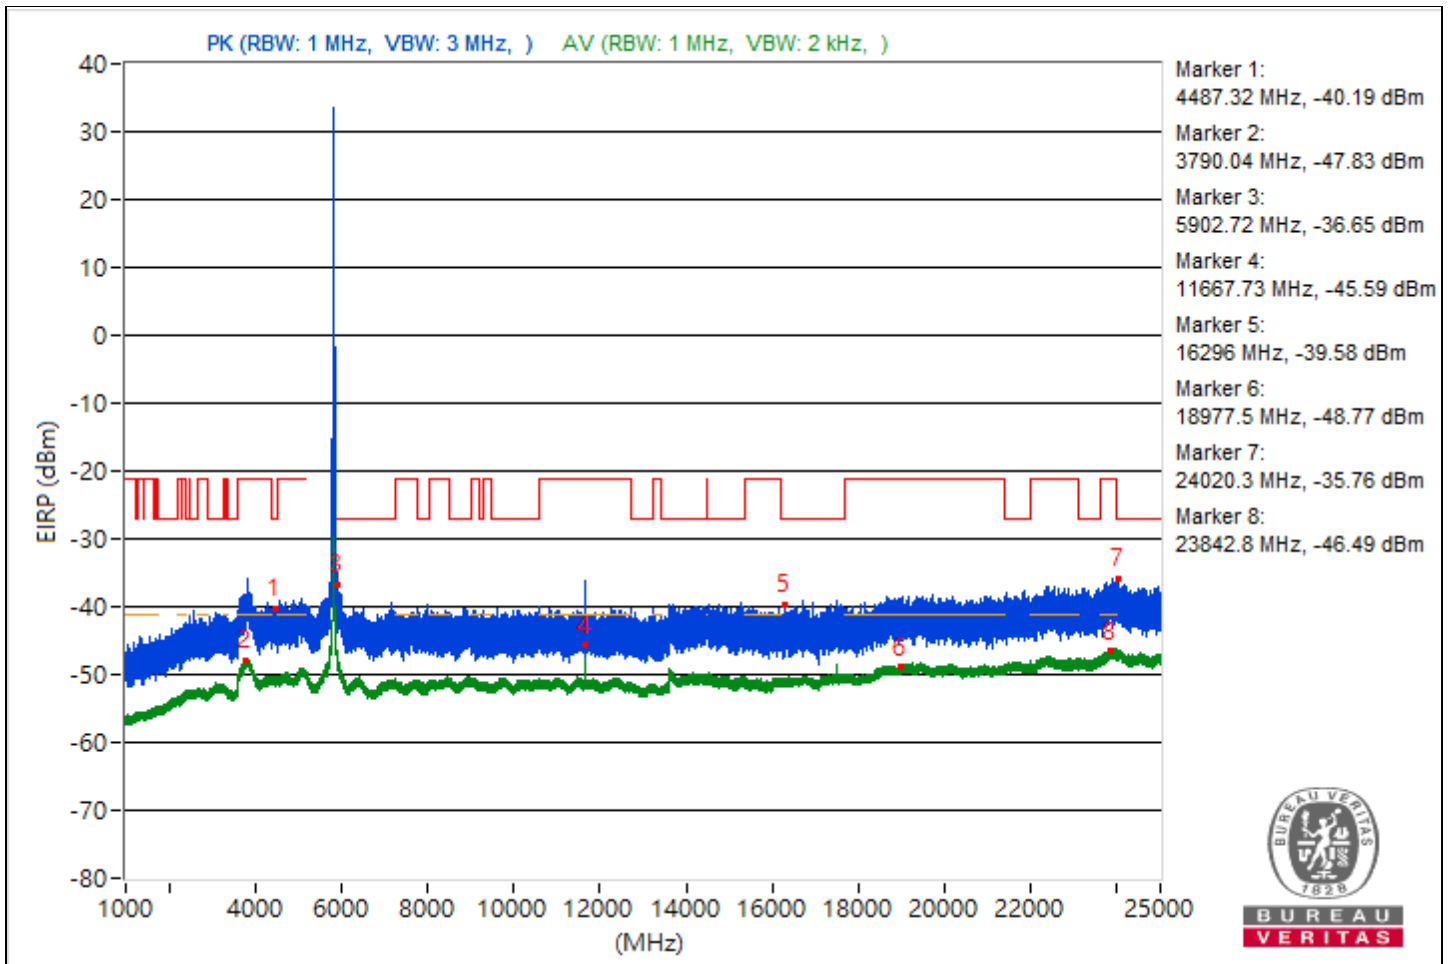

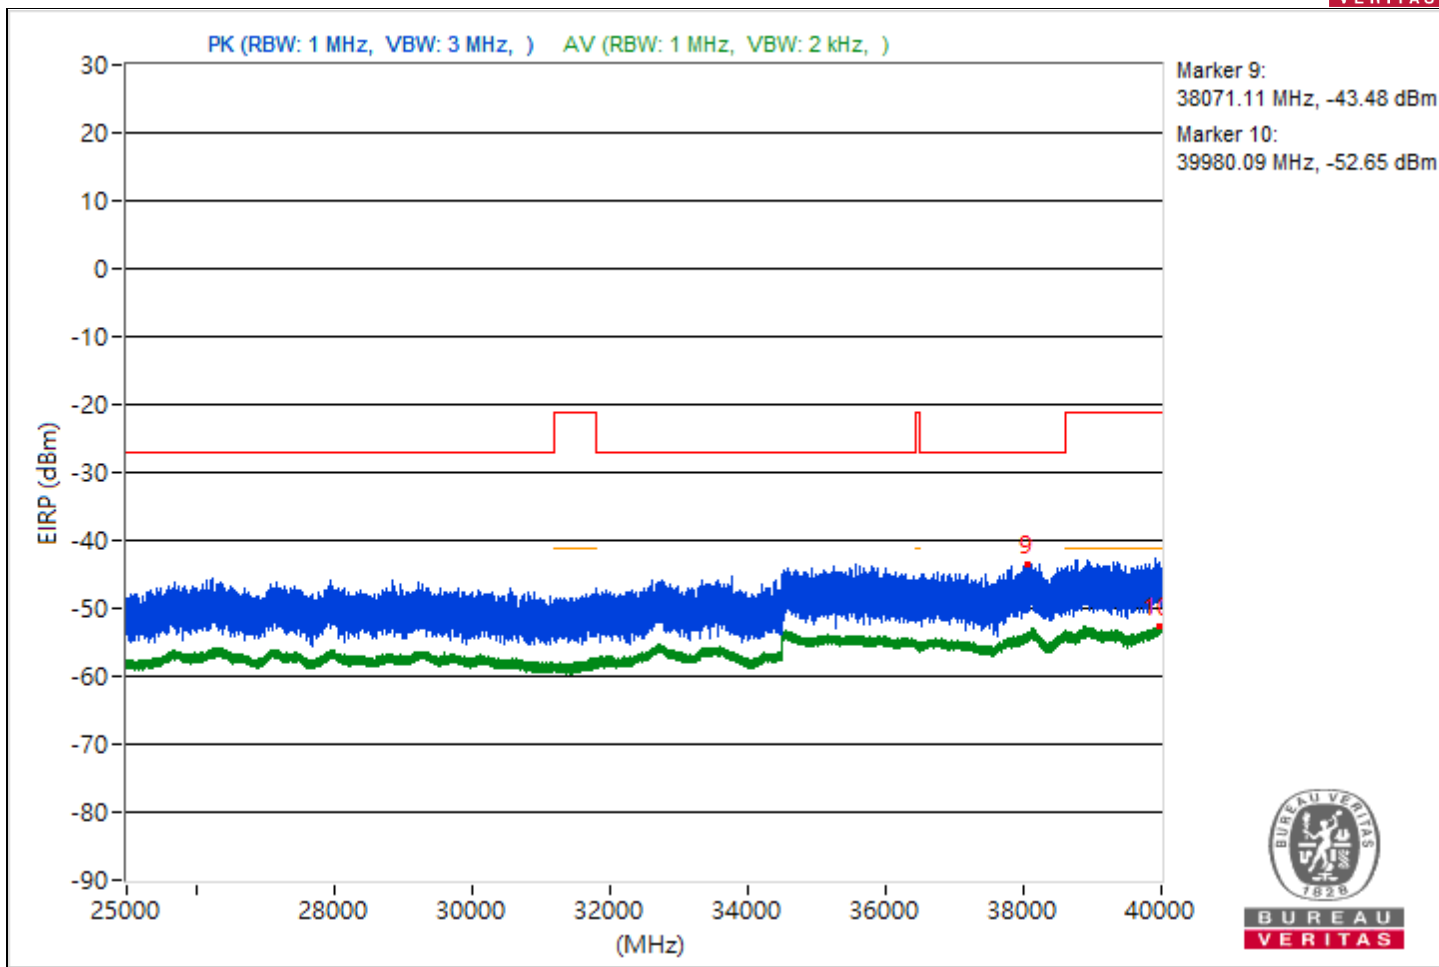



RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4437.78	53.97 PK	68.26	-14.29	-47.21	-53.09	4.92	-41.29
2	3855.46	47.43 AV	54	-6.57	-56.19	-55.37	4.92	-47.83
3	#8902.76	55.19 PK	68.26	-13.07	-45.93	-52.09	4.92	-40.07
4	11451.29	44.71 AV	54	-9.29	-59.27	-57.82	4.92	-50.55
5	#14322.58	55.58 PK	68.26	-12.68	-45.61	-51.42	4.92	-39.68
6	18985.8	46.53 AV	54	-7.47	-56.94	-56.4	4.92	-48.73
7	#24473.5	58.9 PK	68.26	-9.36	-49.67	-41.97	4.92	-36.36
8	23886.2	48.89 AV	54	-5.11	-53.6	-55.13	4.92	-46.37
9	#36739.64	51.52 PK	68.26	-16.74	-56.22	-49.5	4.92	-43.74
10	39987.38	42.95 AV	54	-11.05	-60.8	-59.74	4.92	-52.31

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

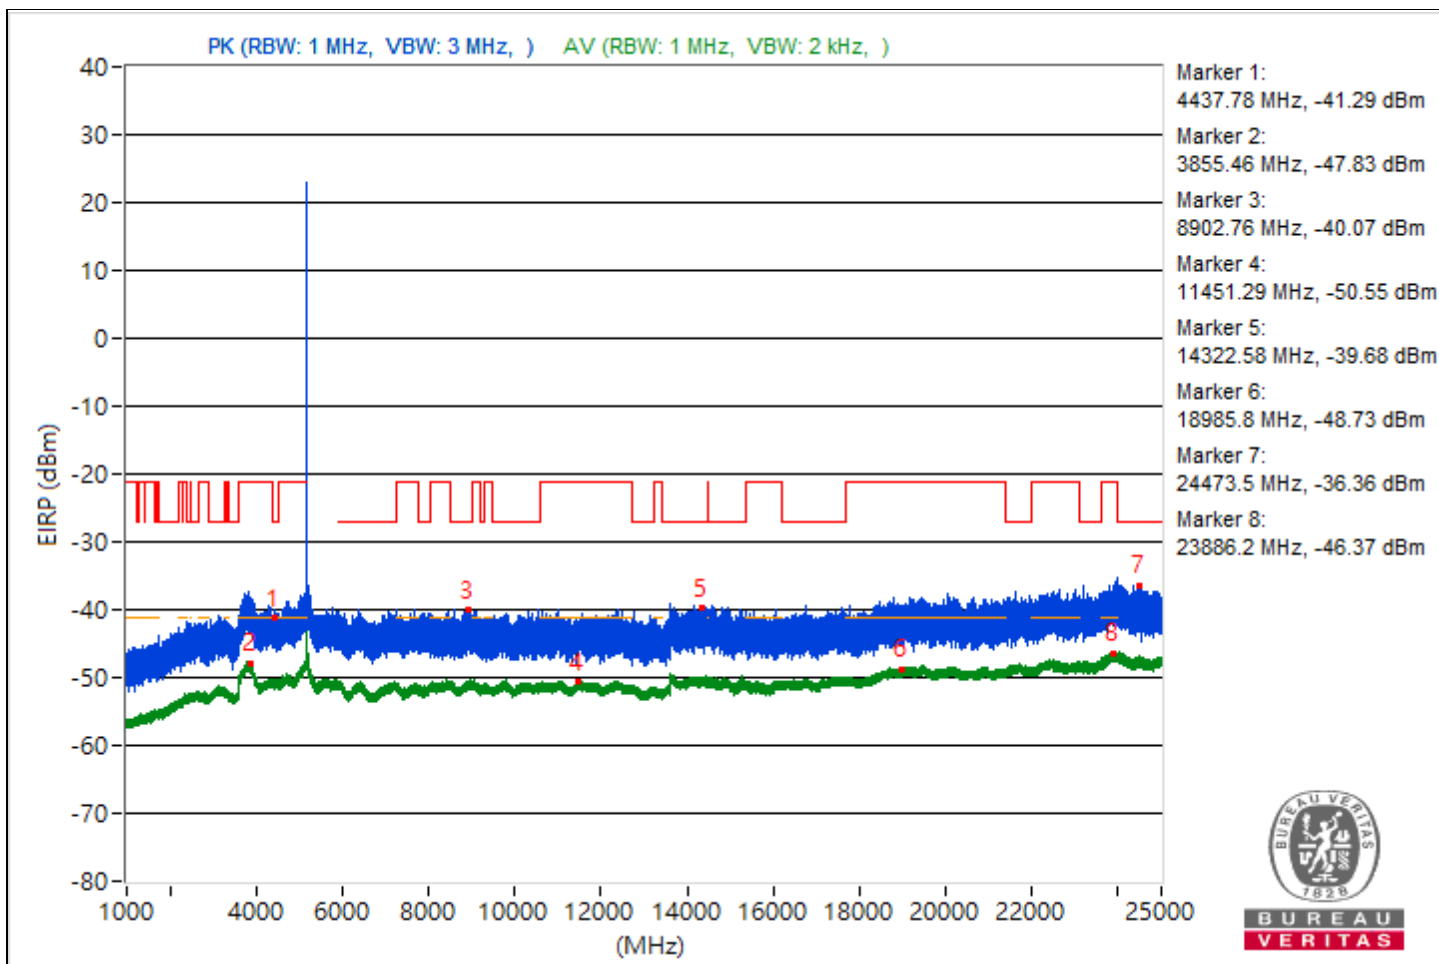

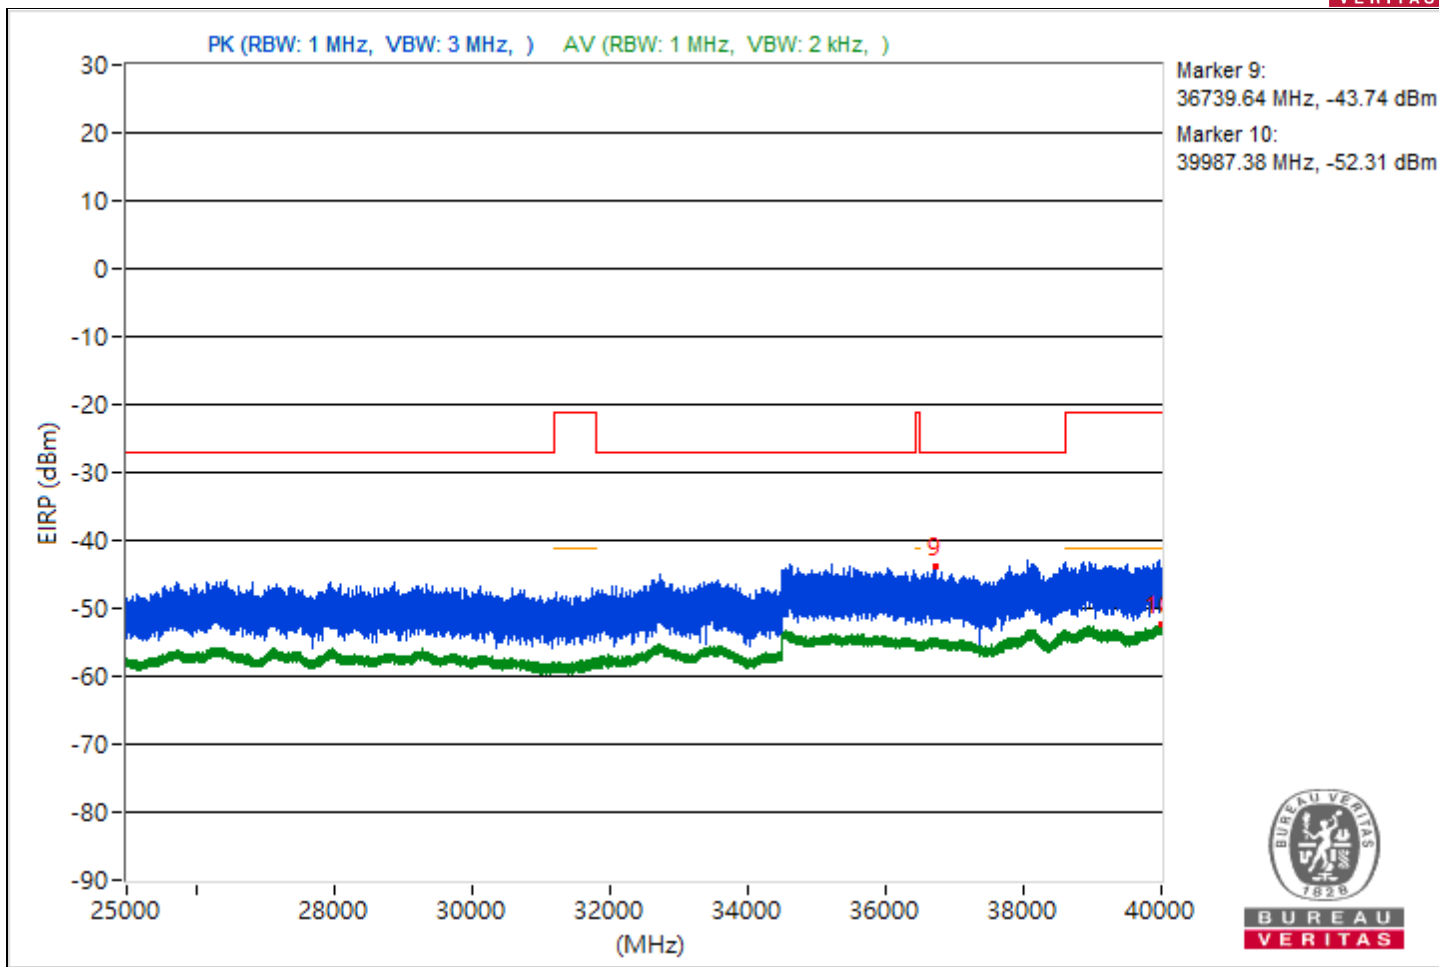



RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4468.27	55.4 PK	68.26	-12.86	-49.23	-46.71	4.92	-39.86
2	3797.04	47.4 AV	54	-6.6	-56.48	-55.21	4.92	-47.86
3	#7105.32	56.03 PK	68.26	-12.23	-45.95	-48.86	4.92	-39.23
4	11520.53	45.17 AV	54	-8.83	-57.94	-58.11	4.92	-50.09
5	#14072.53	55.79 PK	68.26	-12.47	-45.72	-50.18	4.92	-39.47
6	18966.9	46.62 AV	54	-7.38	-56.19	-56.99	4.92	-48.64
7	#24181.4	58.7 PK	68.26	-9.56	-42.31	-49.06	4.92	-36.56
8	23887.1	48.73 AV	54	-5.27	-55.16	-53.86	4.92	-46.53
9	#38091.29	53.03 PK	68.26	-15.23	-52.4	-48.69	4.92	-42.23
10	39976.62	42.96 AV	54	-11.04	-60.91	-59.63	4.92	-52.3

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

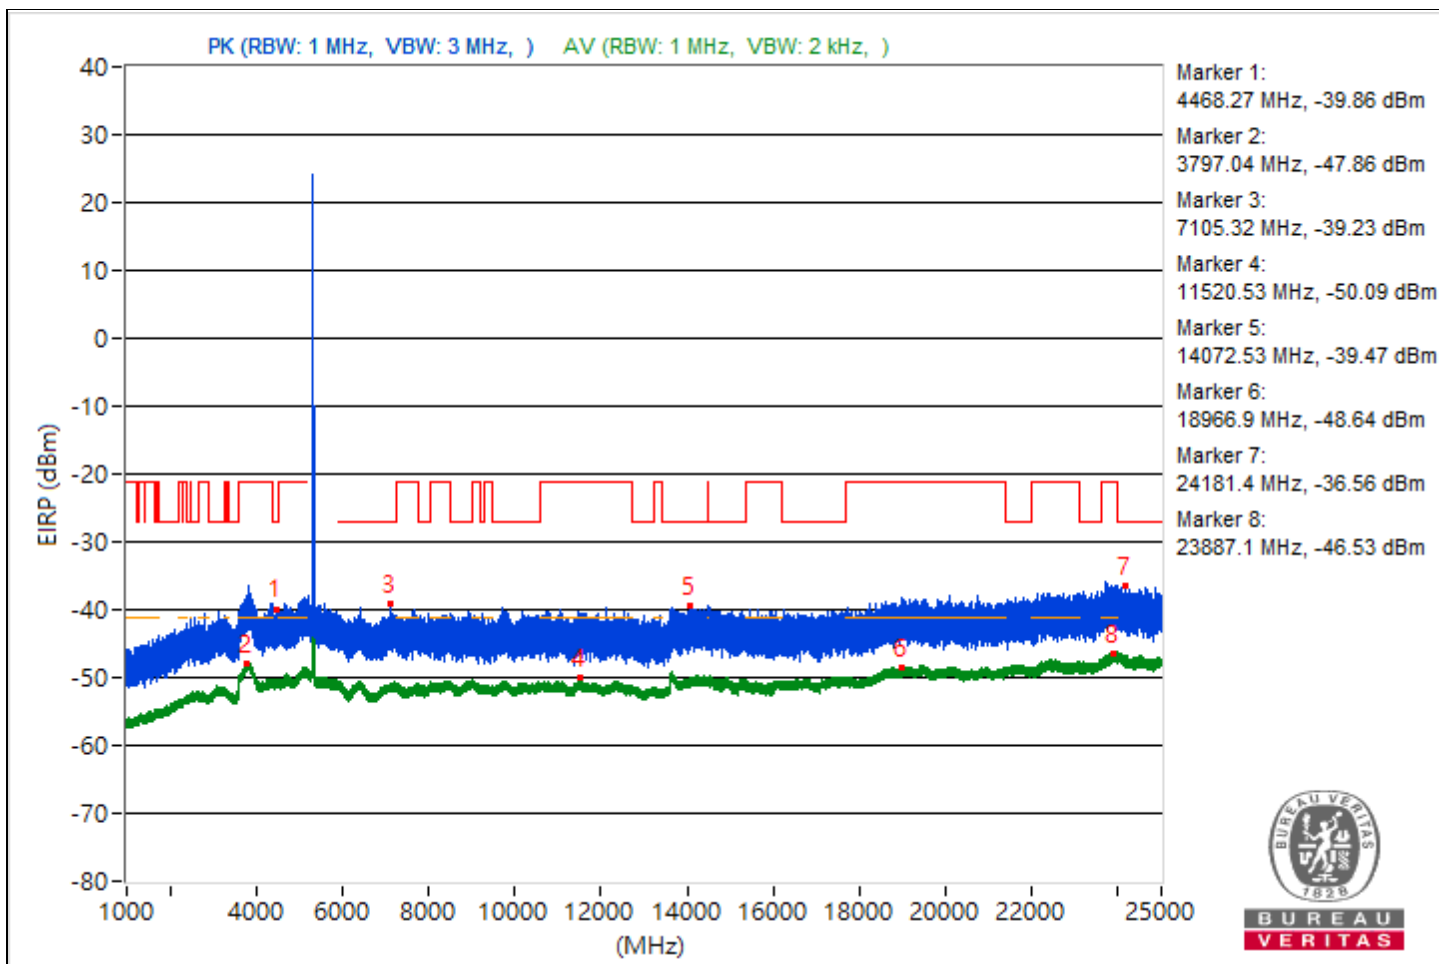

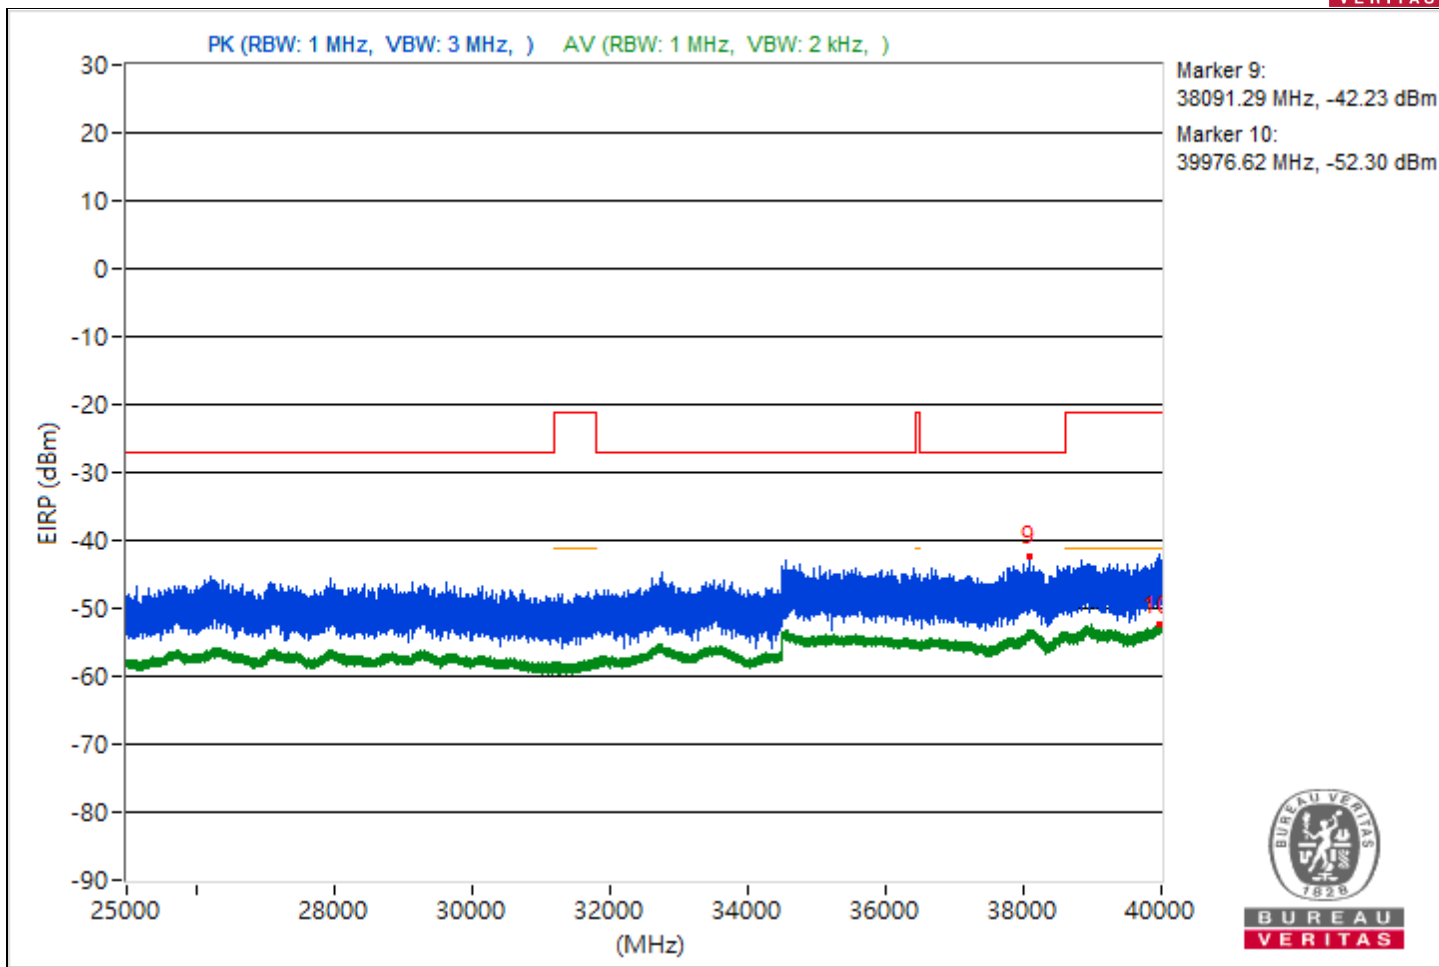





RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4480.09	56.78 PK	68.26	-11.48	-45.61	-47.41	4.92	-38.48
2	3775.11	47.49 AV	54	-6.51	-56.03	-55.4	4.92	-47.77
3	#7104.16	54.94 PK	68.26	-13.32	-46.35	-51.71	4.92	-40.32
4	8365.07	44.73 AV	54	-9.27	-58.05	-58.92	4.92	-50.53
5	#13653.69	56.34 PK	68.26	-11.92	-51.36	-44.69	4.92	-38.92
6	18993.2	46.74 AV	54	-7.26	-56.2	-56.73	4.92	-48.52
7	#24354.3	58.79 PK	68.26	-9.47	-49.02	-42.21	4.92	-36.47
8	23967.9	49.13 AV	54	-4.87	-54.9	-53.36	4.92	-46.13
9	#34572.62	52.38 PK	68.26	-15.88	-53.66	-49.1	4.92	-42.88
10	39995.73	43.33 AV	54	-10.67	-59.69	-60.04	4.92	-51.93

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

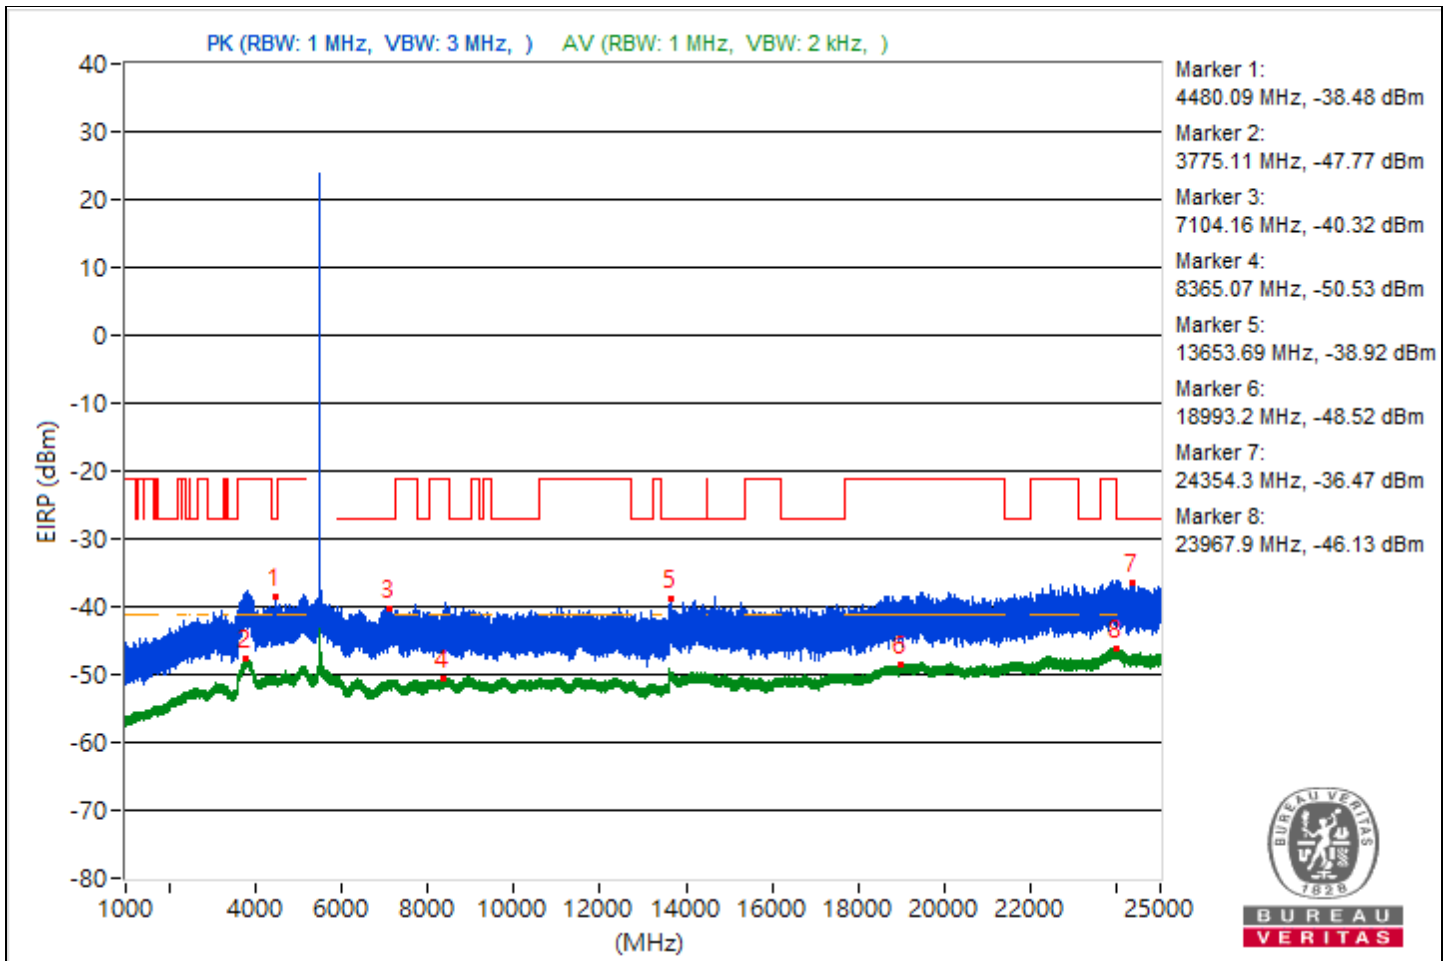

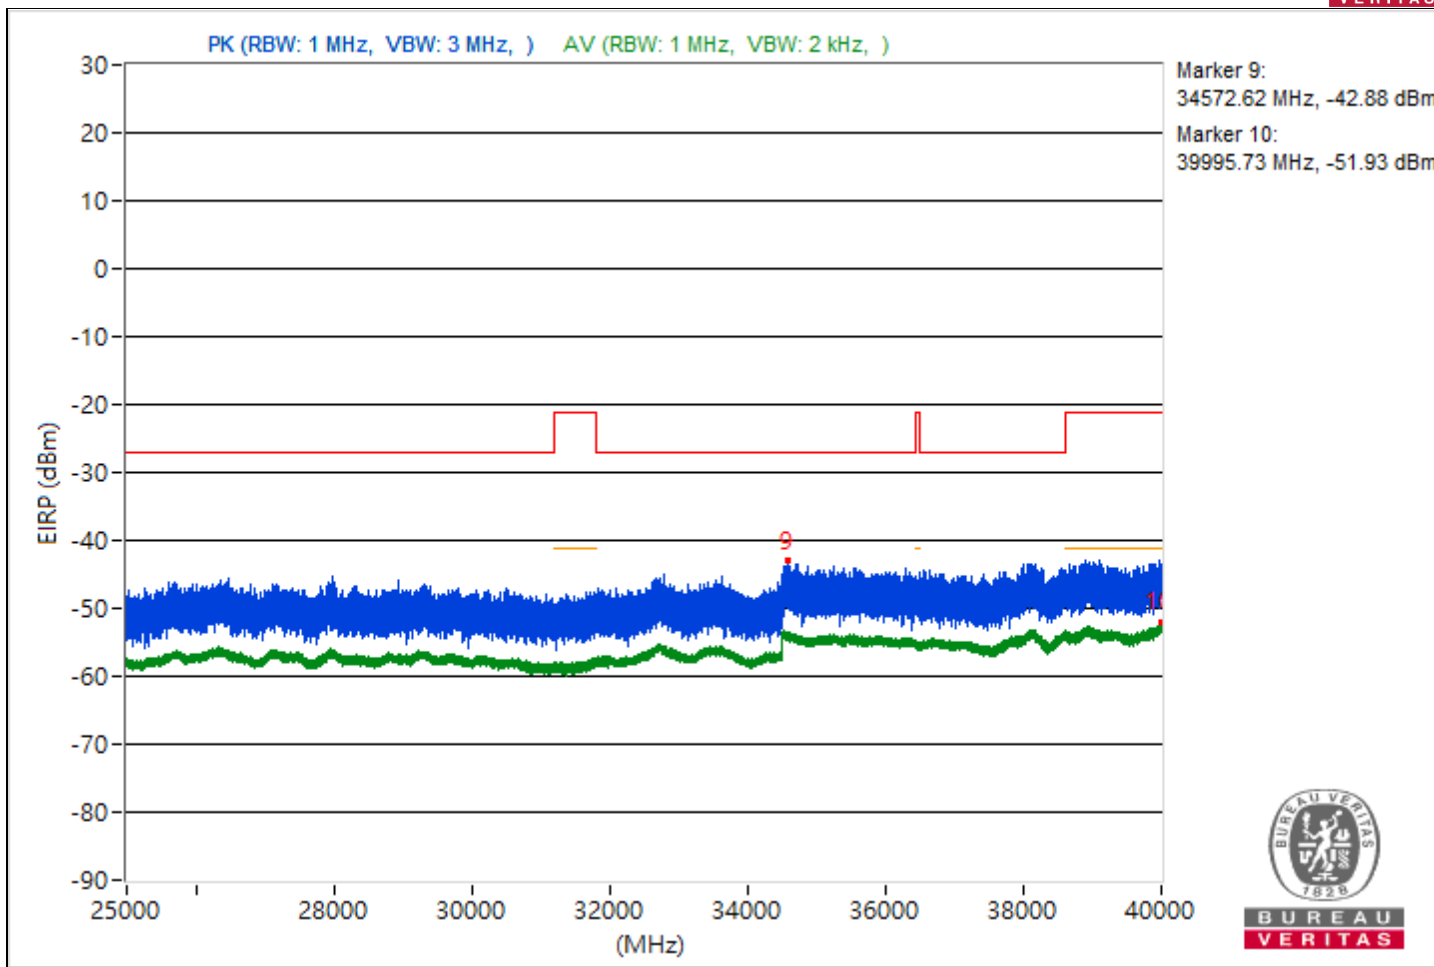



RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4423.23	54.98 PK	68.26	-13.28	-46.73	-50.46	4.92	-40.28
2	3842.78	47.49 AV	54	-6.51	-56.23	-55.23	4.92	-47.77
3	#5990.22	55.19 PK	68.26	-13.07	-46.47	-50.38	4.92	-40.07
4	11478.13	44.82 AV	54	-9.18	-58.75	-58.02	4.92	-50.44
5	#14207.47	55.85 PK	68.26	-12.41	-45.38	-51	4.92	-39.41
6	18938.5	46.5 AV	54	-7.5	-57.13	-56.29	4.92	-48.76
7	#24308.3	58.34 PK	68.26	-9.92	-49.51	-42.66	4.92	-36.92
8	23862.8	48.93 AV	54	-5.07	-54.93	-53.68	4.92	-46.33
9	#35418.13	52.2 PK	68.26	-16.06	-53.58	-49.38	4.92	-43.06
10	39966.84	42.83 AV	54	-11.17	-59.91	-60.87	4.92	-52.43

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

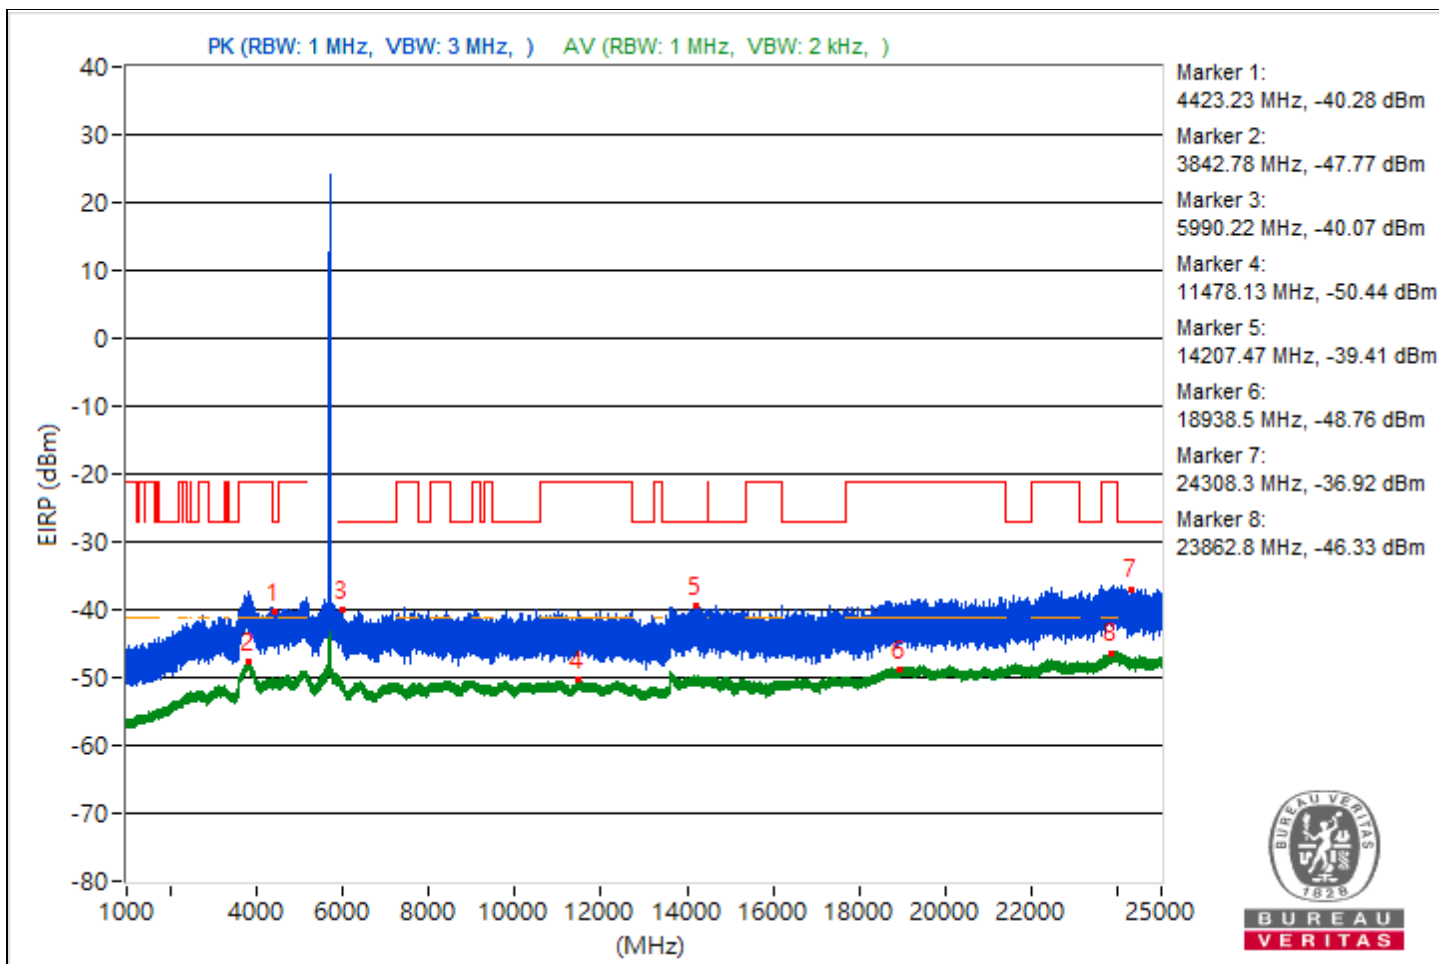

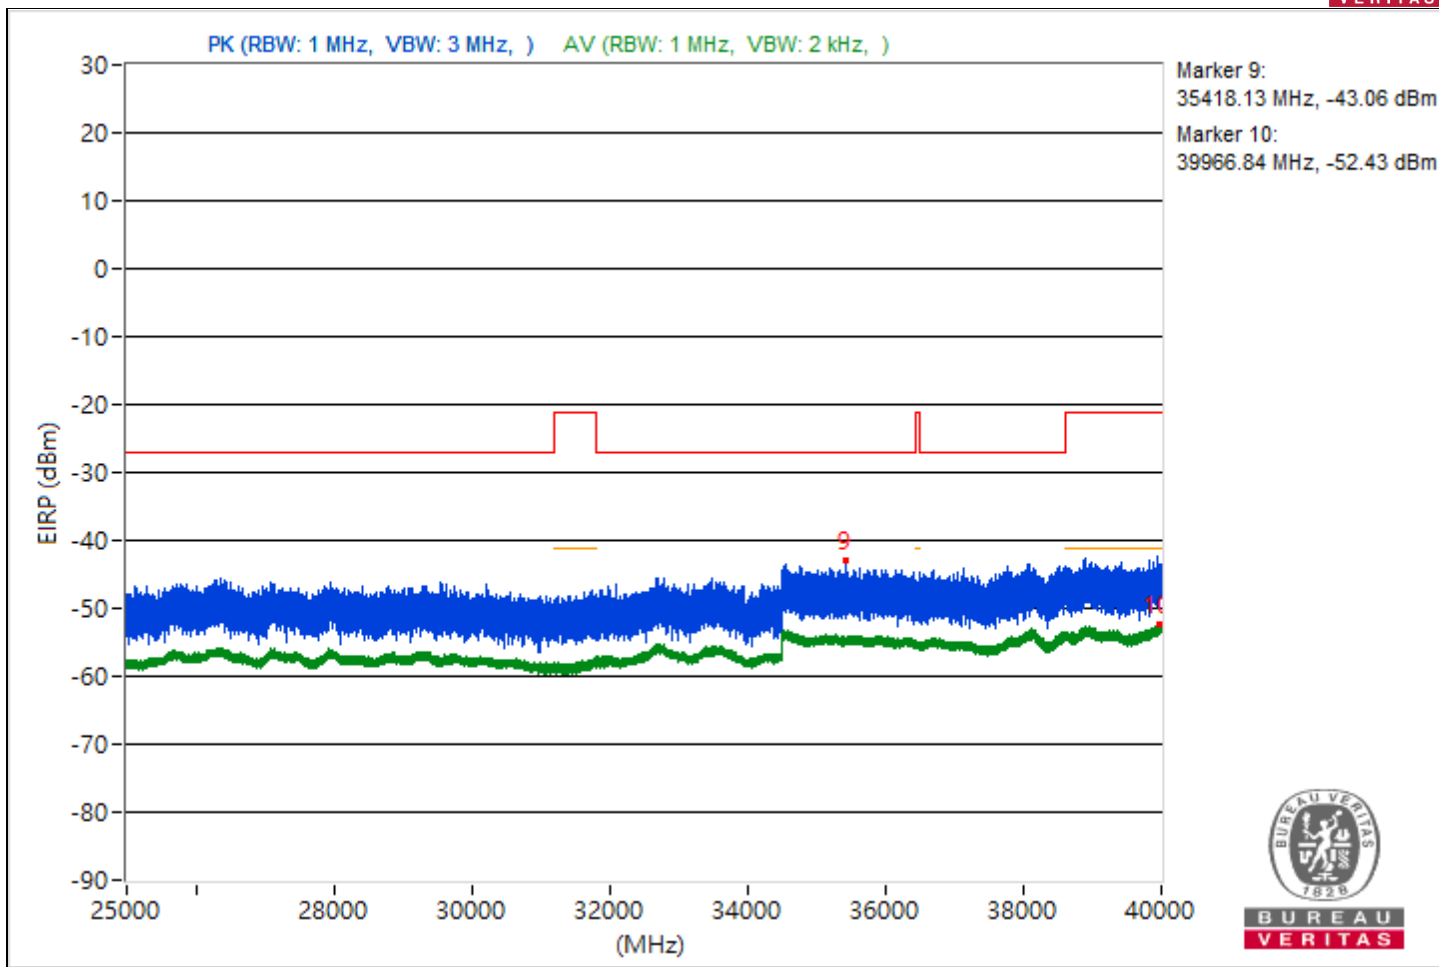



RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4427.74	54.61 PK	68.26	-13.65	-51.39	-46.89	4.92	-40.65
2	3857.17	47.32 AV	54	-6.68	-56.3	-55.47	4.92	-47.94
3	#9826.93	55.57 PK	68.26	-12.69	-46.07	-50.05	4.92	-39.69
4	9030.93	44.55 AV	54	-9.45	-59.07	-58.25	4.92	-50.71
5	#15245.69	55.34 PK	68.26	-12.92	-45.97	-51.26	4.92	-39.92
6	18992.2	46.52 AV	54	-7.48	-56.96	-56.39	4.92	-48.74
7	#24463	58.67 PK	68.26	-9.59	-46.77	-43.04	4.92	-36.59
8	23919.7	49.01 AV	54	-4.99	-53.94	-54.43	4.92	-46.25
9	#38150.22	51.18 PK	68.26	-17.08	-49.81	-56.71	4.92	-44.08
10	39996.09	42.74 AV	54	-11.26	-60.82	-60.11	4.92	-52.52

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

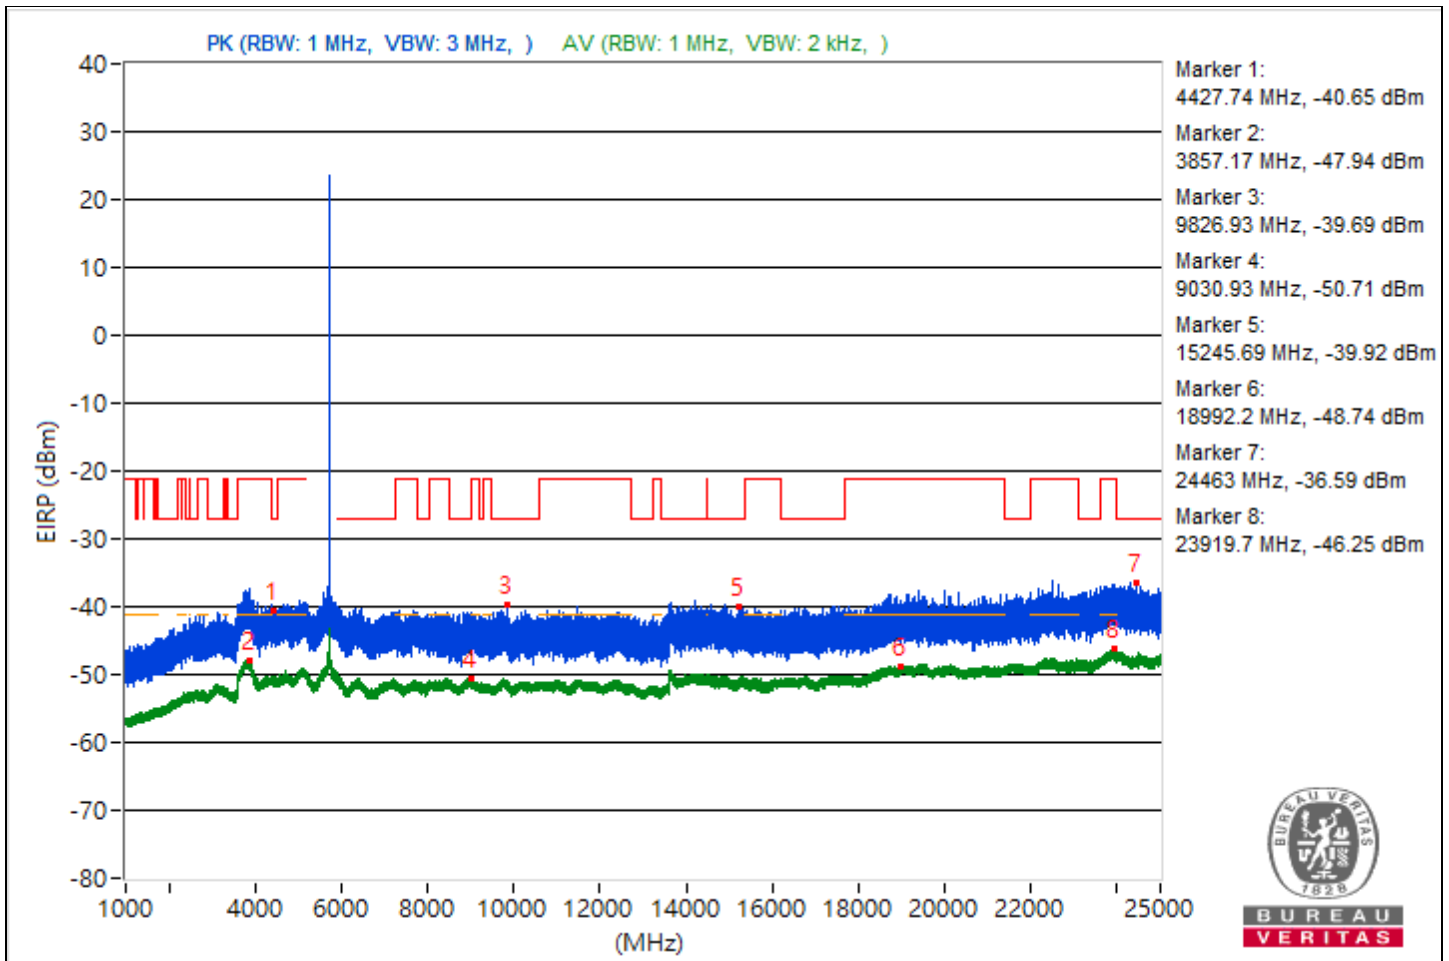

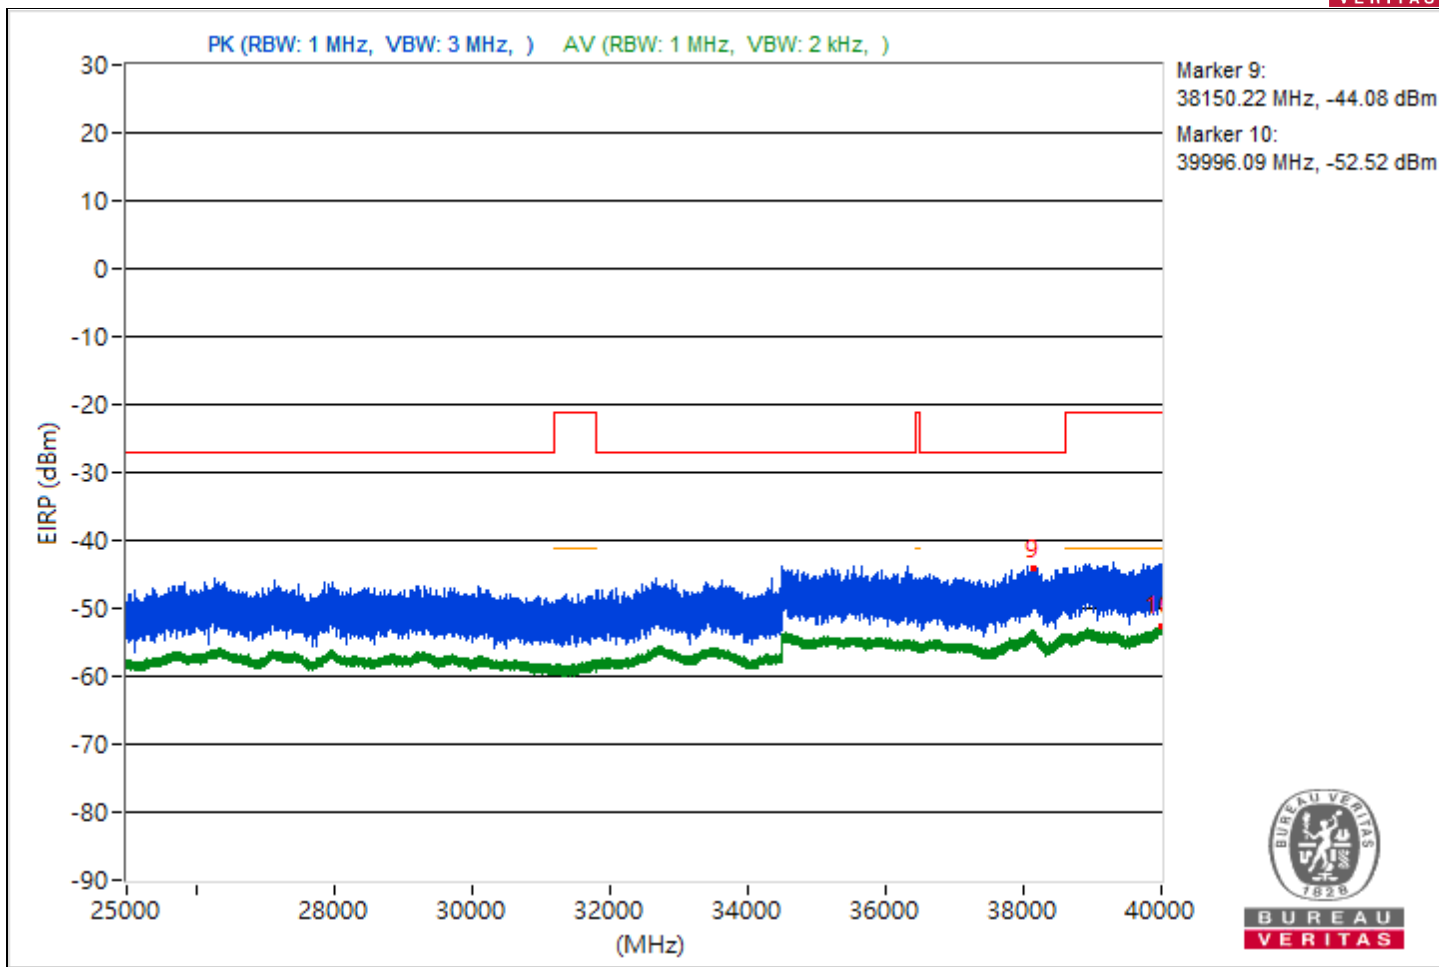





RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4451.23	55.25 PK	68.26	-13.01	-49.11	-47.01	4.92	-40.01
2	3804.98	47.61 AV	54	-6.39	-55.16	-56.06	4.92	-47.65
3	#5924.73	55.78 PK	68.26	-12.48	-50.1	-45.76	4.92	-39.48
4	11476.09	47.77 AV	54	-6.23	-56.17	-54.78	4.92	-47.49
5	#14386.13	55.47 PK	68.26	-12.79	-45.84	-51.1	4.92	-39.79
6	18729.8	46.55 AV	54	-7.45	-56.88	-56.42	4.92	-48.71
7	#24007.8	58.74 PK	68.26	-9.52	-47.33	-42.74	4.92	-36.52
8	23897.5	48.78 AV	54	-5.22	-53.68	-55.28	4.92	-46.48
9	#37937.51	52.82 PK	68.26	-15.44	-48.18	-55.03	4.92	-42.44
10	39961.78	42.71 AV	54	-11.29	-61.38	-59.74	4.92	-52.55

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

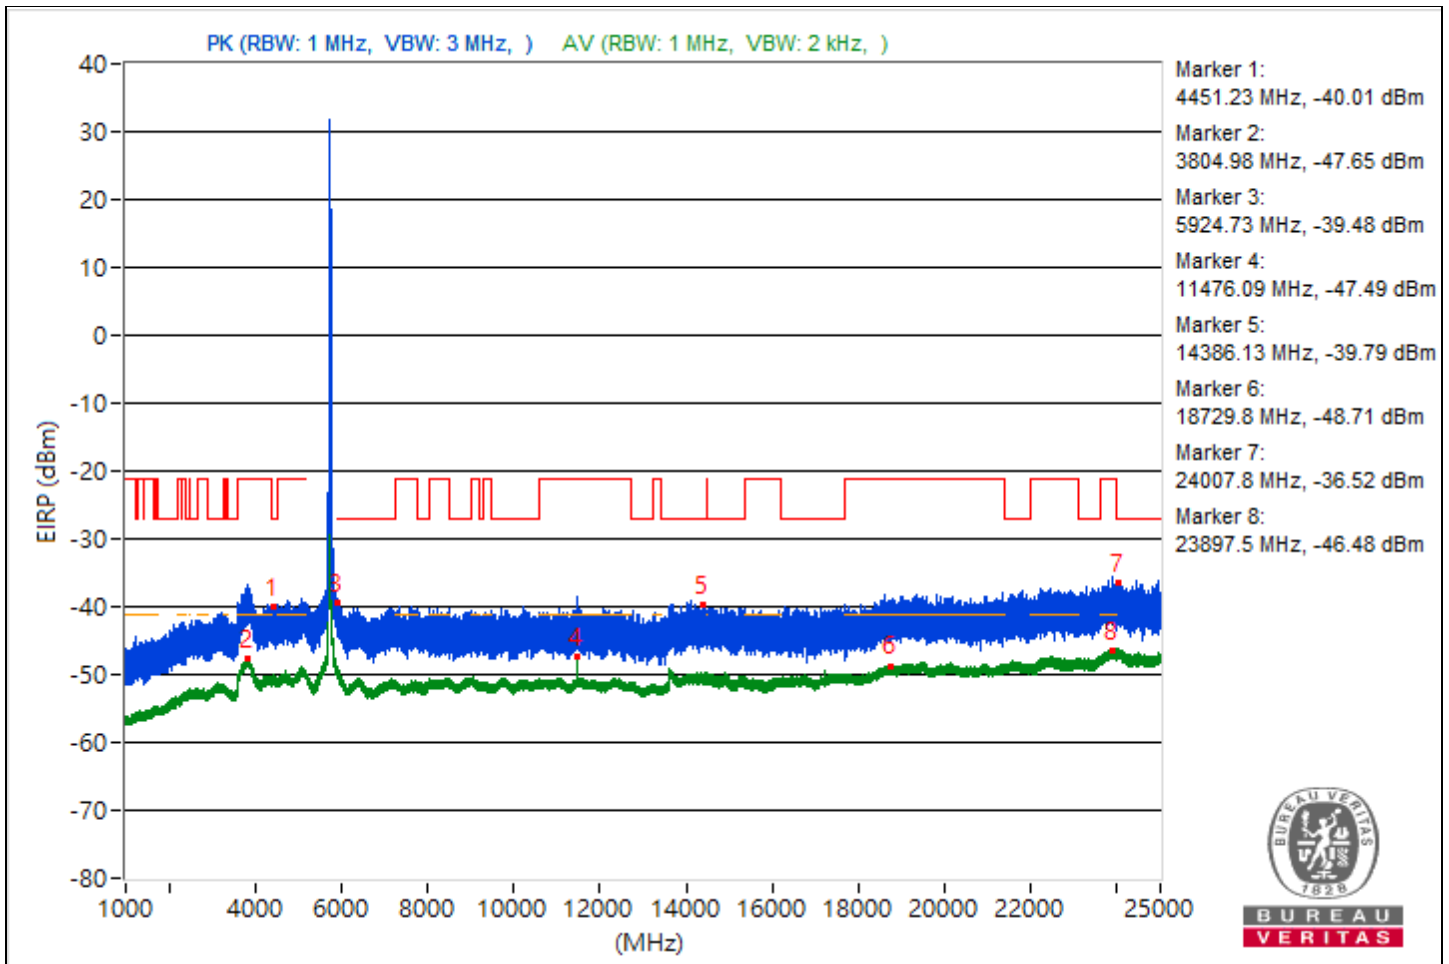

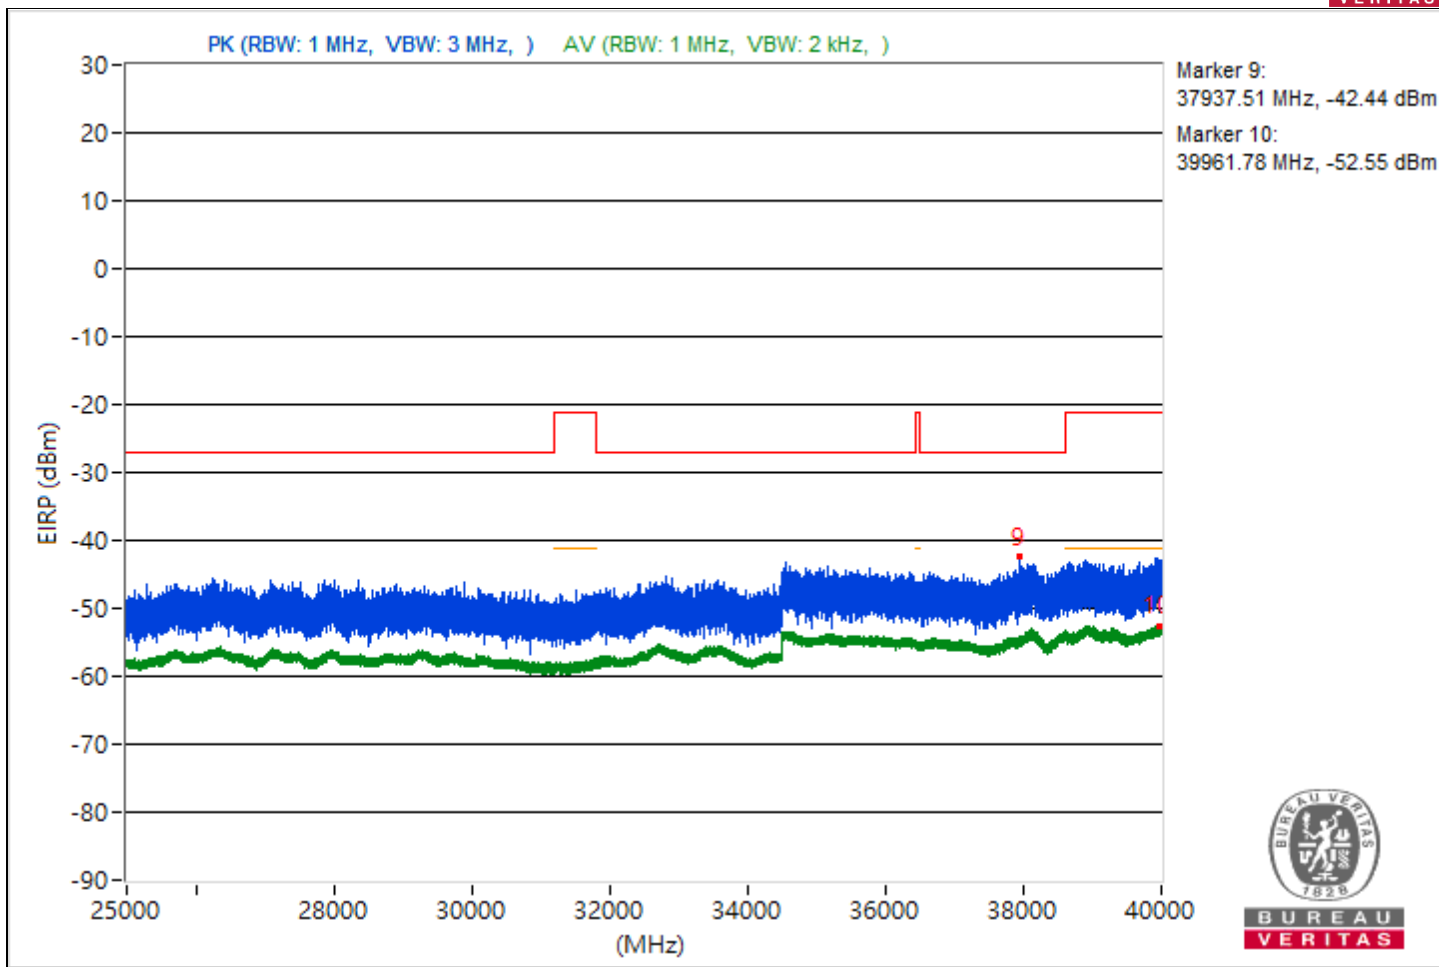





RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4431.63	55.31 PK	68.26	-12.95	-47.33	-48.51	4.92	-39.95
2	3821.23	47.63 AV	54	-6.37	-54.97	-56.23	4.92	-47.63
3	#5905.06	58.43 PK	68.26	-9.83	-47.37	-43.15	4.92	-36.83
4	11665.6	48.27 AV	54	-5.73	-57.24	-53.41	4.92	-46.99
5	#14300.18	55.92 PK	68.26	-12.34	-45.44	-50.51	4.92	-39.34
6	18668.7	46.62 AV	54	-7.38	-56.96	-56.21	4.92	-48.64
7	#24467.2	58.49 PK	68.26	-9.77	-42.8	-48.18	4.92	-36.77
8	23874.6	49.03 AV	54	-4.97	-54.73	-53.67	4.92	-46.23
9	#34644.27	52.01 PK	68.26	-16.25	-49.94	-52.91	4.92	-43.25
10	39984.18	43.1 AV	54	-10.9	-59.92	-60.27	4.92	-52.16

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

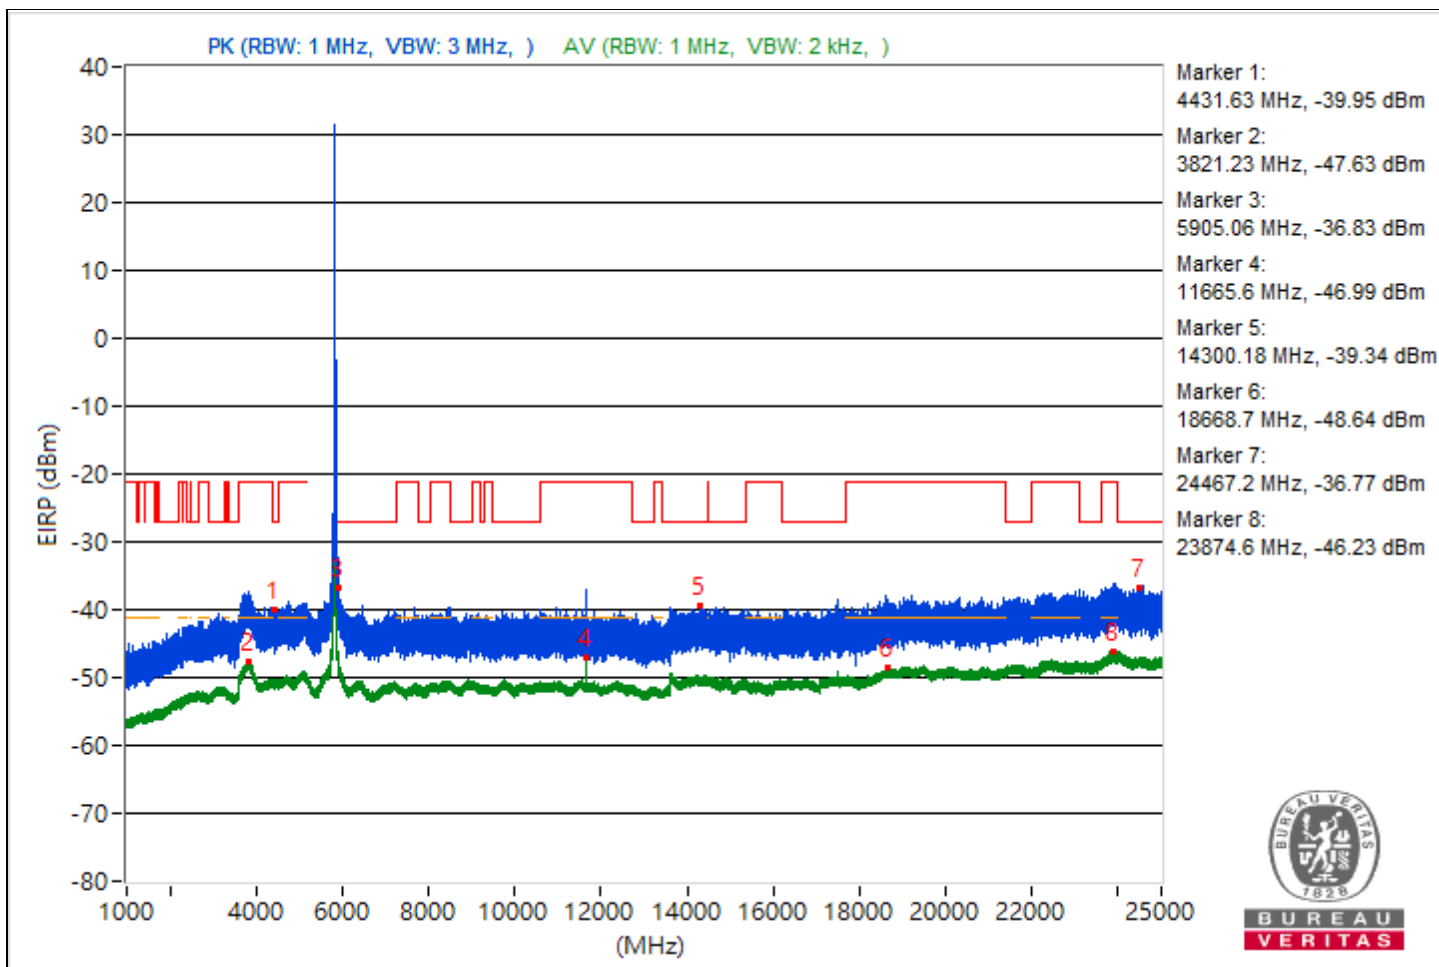

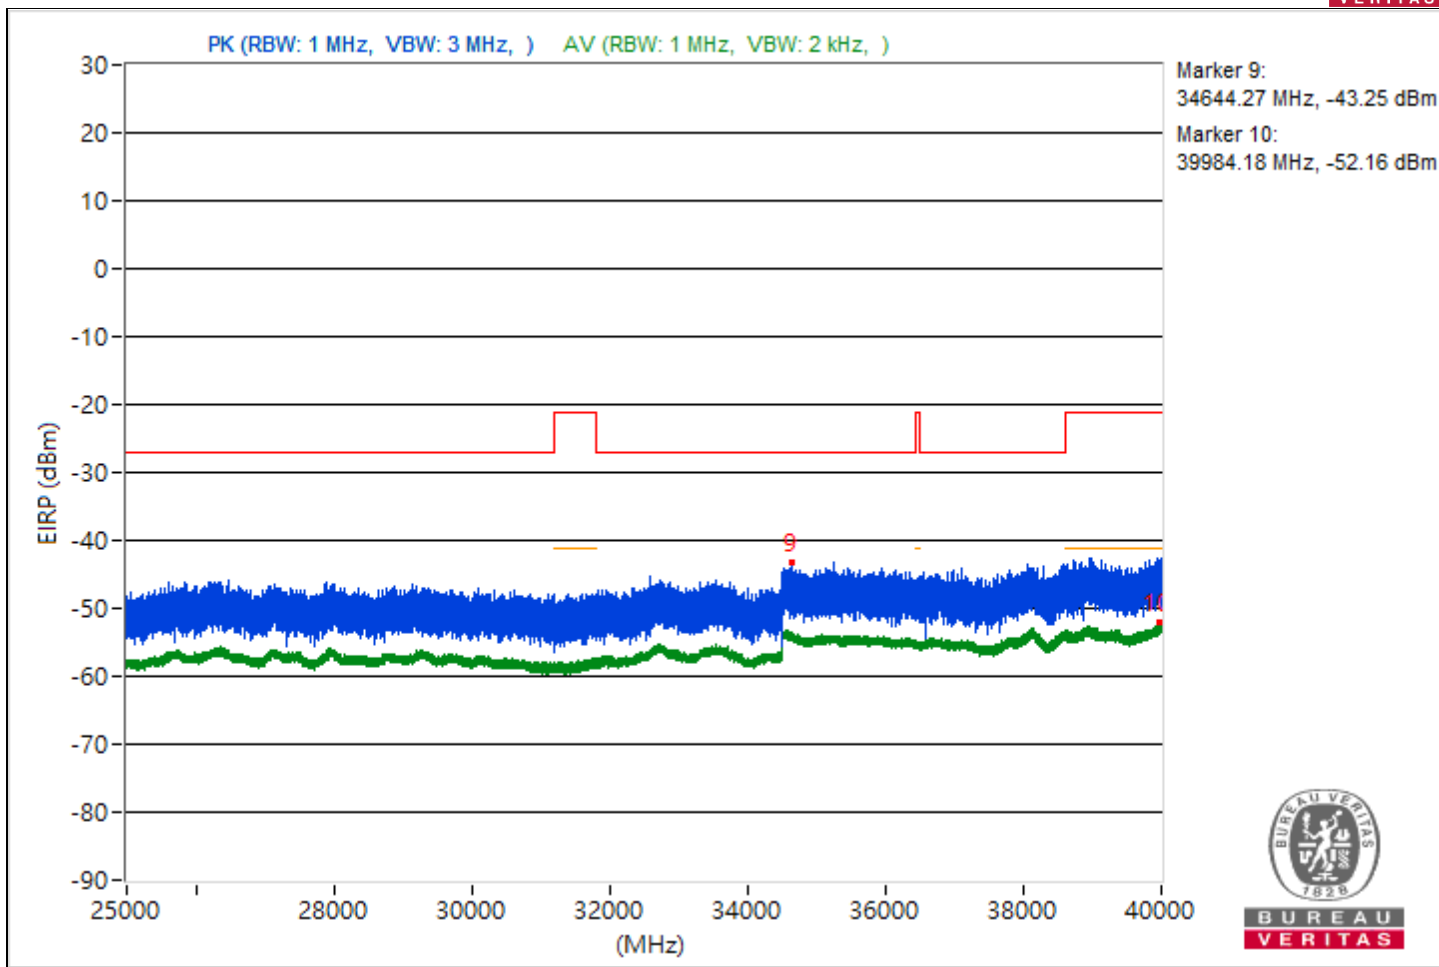



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4432.02	54.59 PK	68.26	-13.67	-47.45	-50.18	4.92	-40.67
2	3829.17	47.72 AV	54	-6.28	-55.67	-55.28	4.92	-47.54
3	#9206.22	55.67 PK	68.26	-12.59	-52.66	-45.23	4.92	-39.59
4	12318.76	44.79 AV	54	-9.21	-58.83	-58.02	4.92	-50.47
5	#15273.96	56.31 PK	68.26	-11.95	-45.11	-49.91	4.92	-38.95
6	18995.5	46.51 AV	54	-7.49	-57.19	-56.23	4.92	-48.75
7	#24078.3	58.74 PK	68.26	-9.52	-47.44	-42.7	4.92	-36.52
8	23855.1	49.14 AV	54	-4.86	-53.6	-54.54	4.92	-46.12
9	#34668.53	51.69 PK	68.26	-16.57	-49.57	-55.06	4.92	-43.57
10	39972.71	42.7 AV	54	-11.3	-60.14	-60.88	4.92	-52.56

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

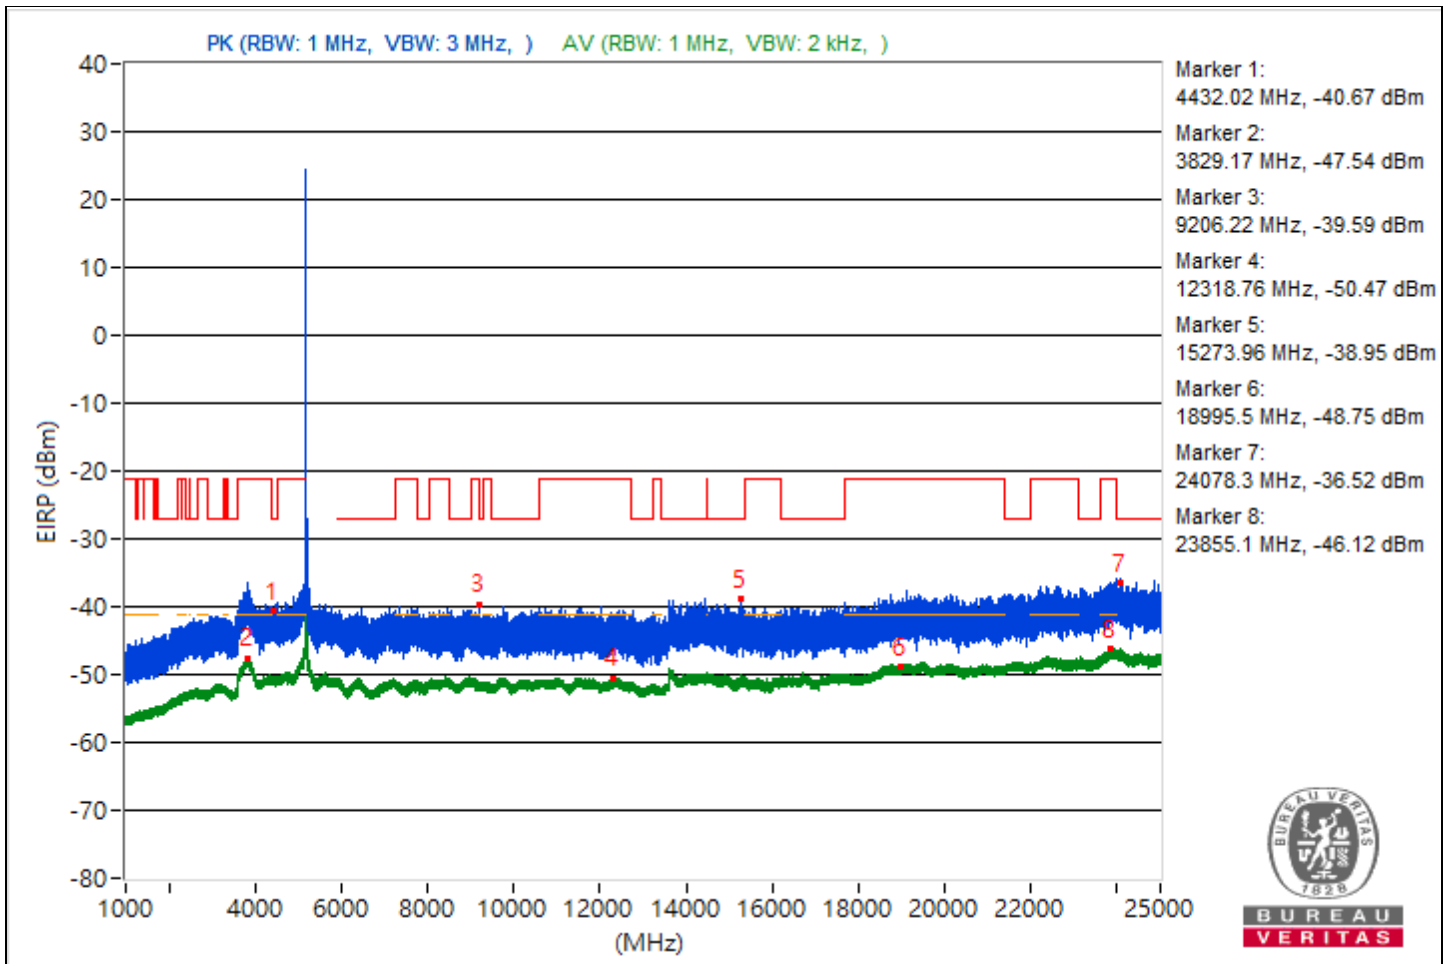

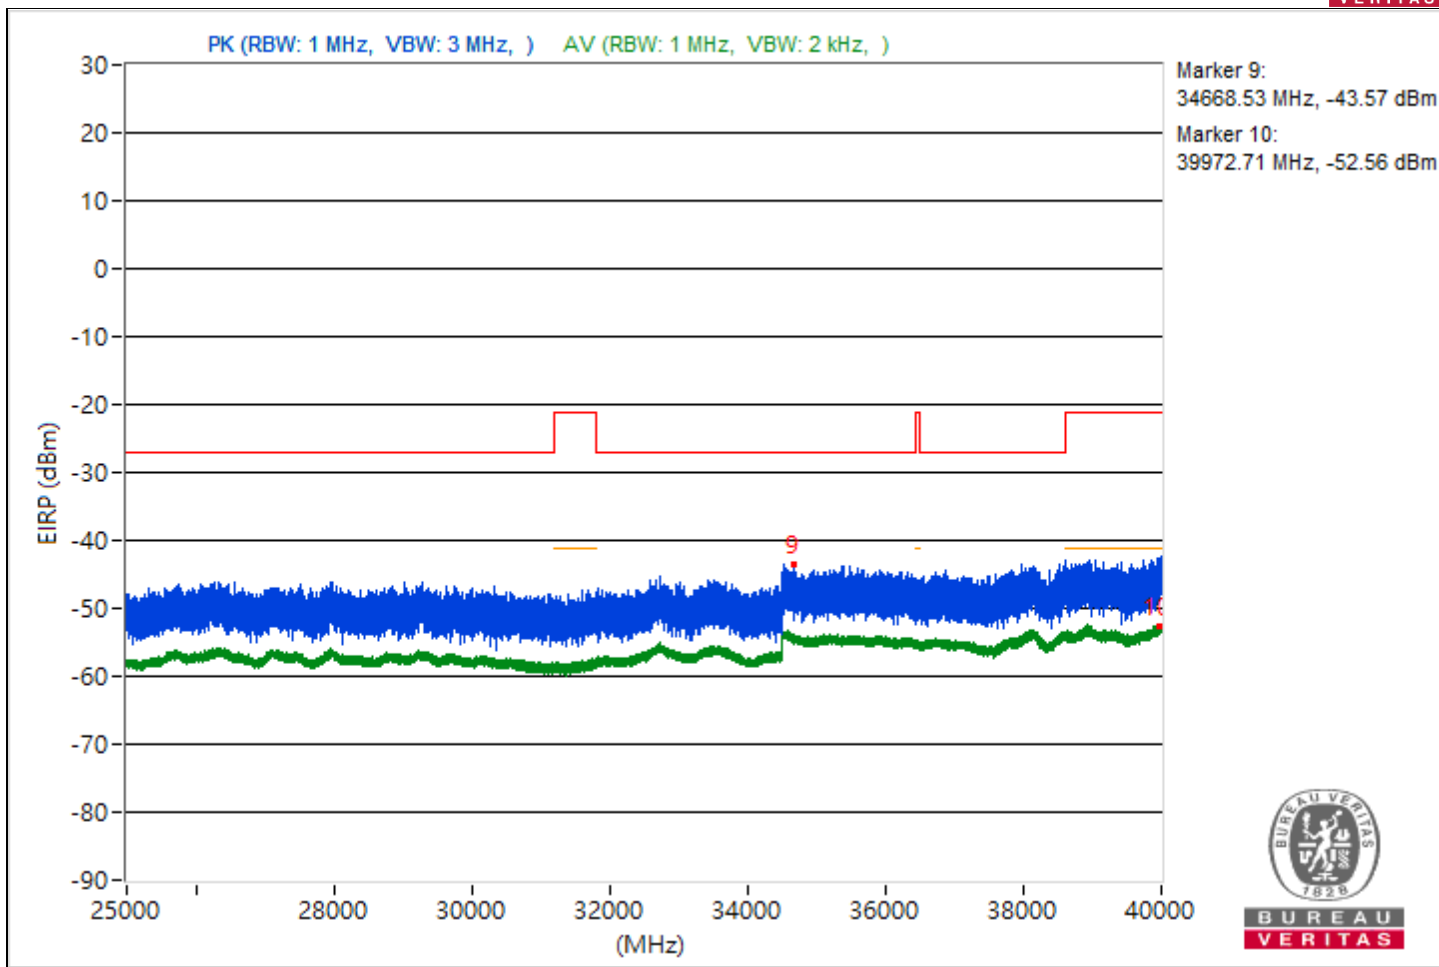



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4463.21	55.22 PK	68.26	-13.04	-50.48	-46.39	4.92	-40.04
2	3852.19	47.45 AV	54	-6.55	-56.16	-55.35	4.92	-47.81
3	#6381.6	55.68 PK	68.26	-12.58	-46.49	-48.83	4.92	-39.58
4	8431.38	44.85 AV	54	-9.15	-58.79	-57.93	4.92	-50.41
5	#14457.24	55.61 PK	68.26	-12.65	-51.71	-45.5	4.92	-39.65
6	18806.1	46.52 AV	54	-7.48	-57.27	-56.14	4.92	-48.74
7	#24115	58.81 PK	68.26	-9.45	-42.41	-48.1	4.92	-36.45
8	23981.5	48.93 AV	54	-5.07	-54.82	-53.76	4.92	-46.33
9	#35150.58	51.87 PK	68.26	-16.39	-49.09	-56.18	4.92	-43.39
10	39997.51	43.01 AV	54	-10.99	-60.64	-59.77	4.92	-52.25

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

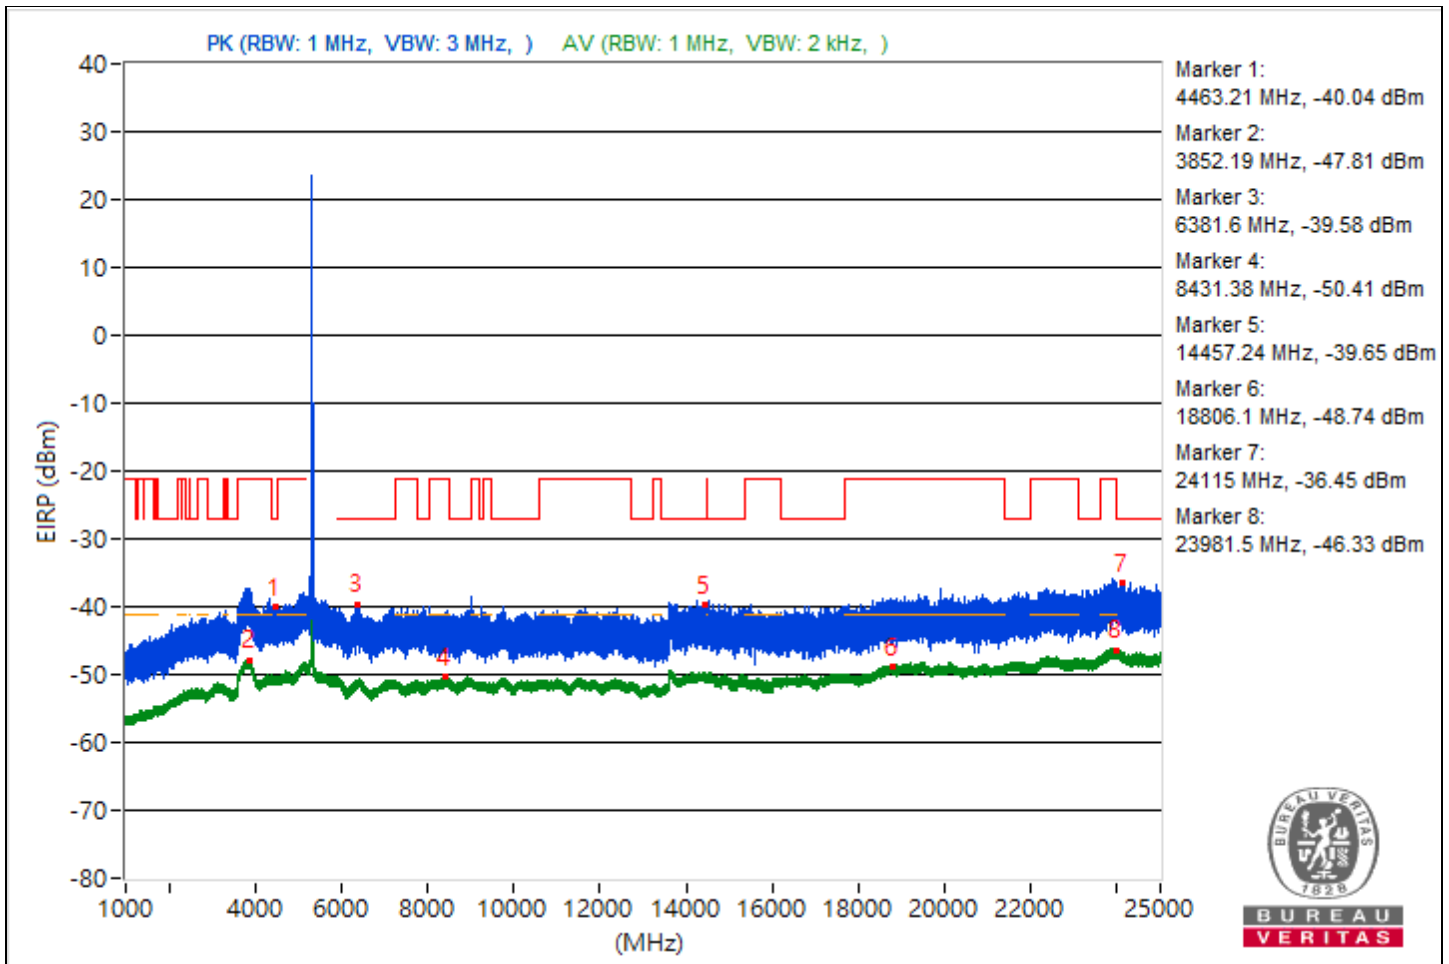

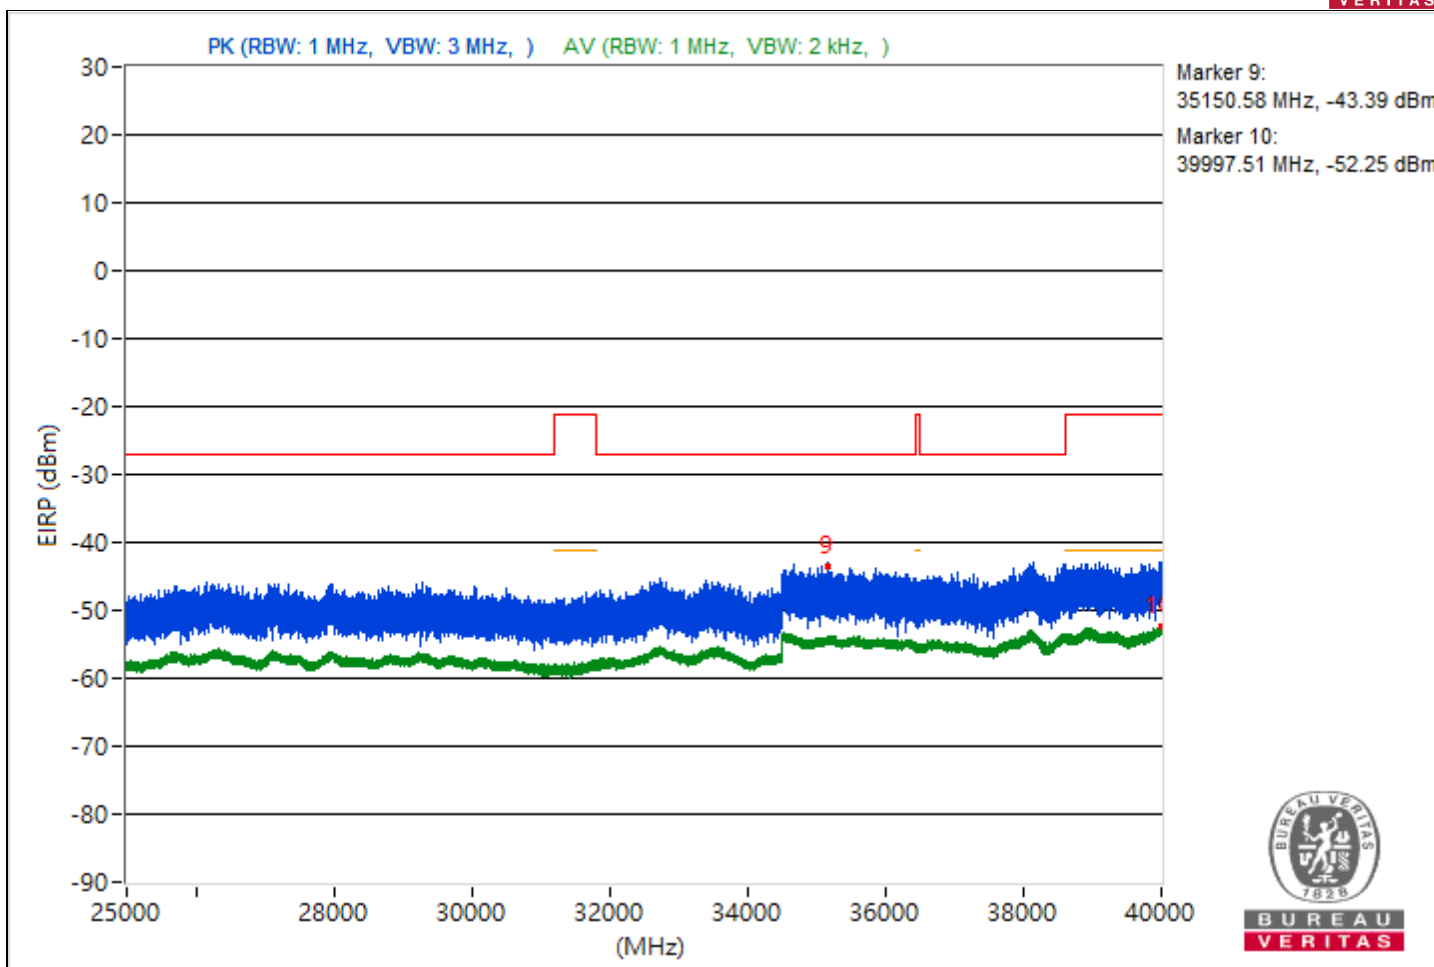



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.64	55.26 PK	68.26	-13	-46.16	-50.97	4.92	-40
2	3831.73	47.66 AV	54	-6.34	-55.16	-55.94	4.92	-47.6
3	#6382.3	55.54 PK	68.26	-12.72	-45.86	-50.75	4.92	-39.72
4	9018.93	44.59 AV	54	-9.41	-57.9	-59.44	4.92	-50.67
5	#14567.56	55.62 PK	68.26	-12.64	-52.04	-45.41	4.92	-39.64
6	18948.2	46.73 AV	54	-7.27	-56.08	-56.87	4.92	-48.53
7	#24541	59.14 PK	68.26	-9.12	-42.07	-47.79	4.92	-36.12
8	23913.9	49.16 AV	54	-4.84	-54.48	-53.62	4.92	-46.1
9	#35558.22	51.84 PK	68.26	-16.42	-54.48	-49.55	4.92	-43.42
10	39986.49	42.85 AV	54	-11.15	-60.62	-60.08	4.92	-52.41

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

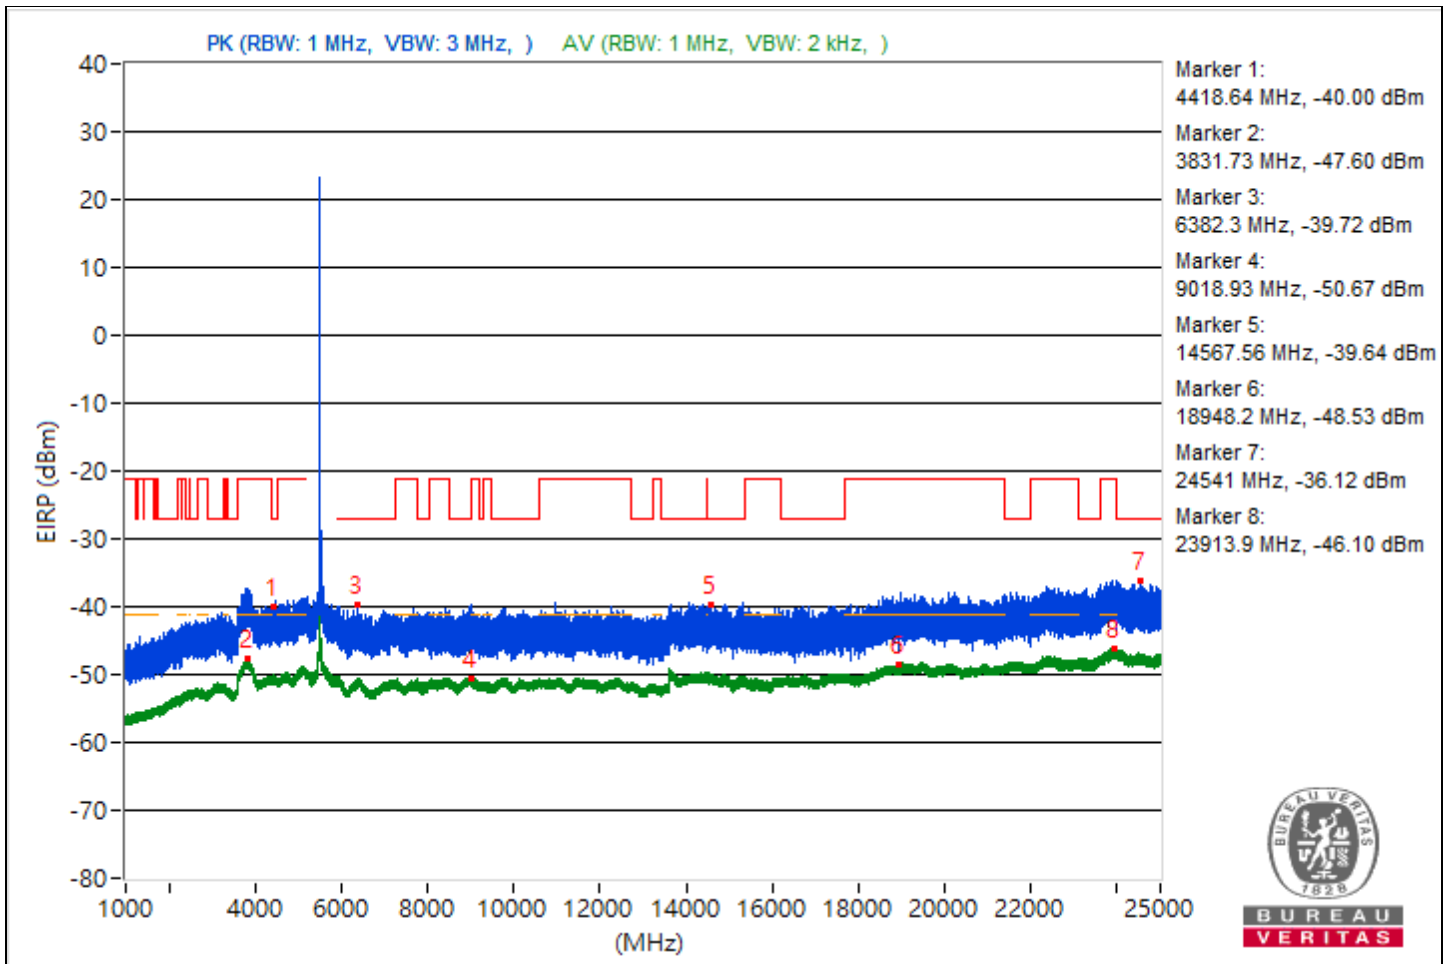

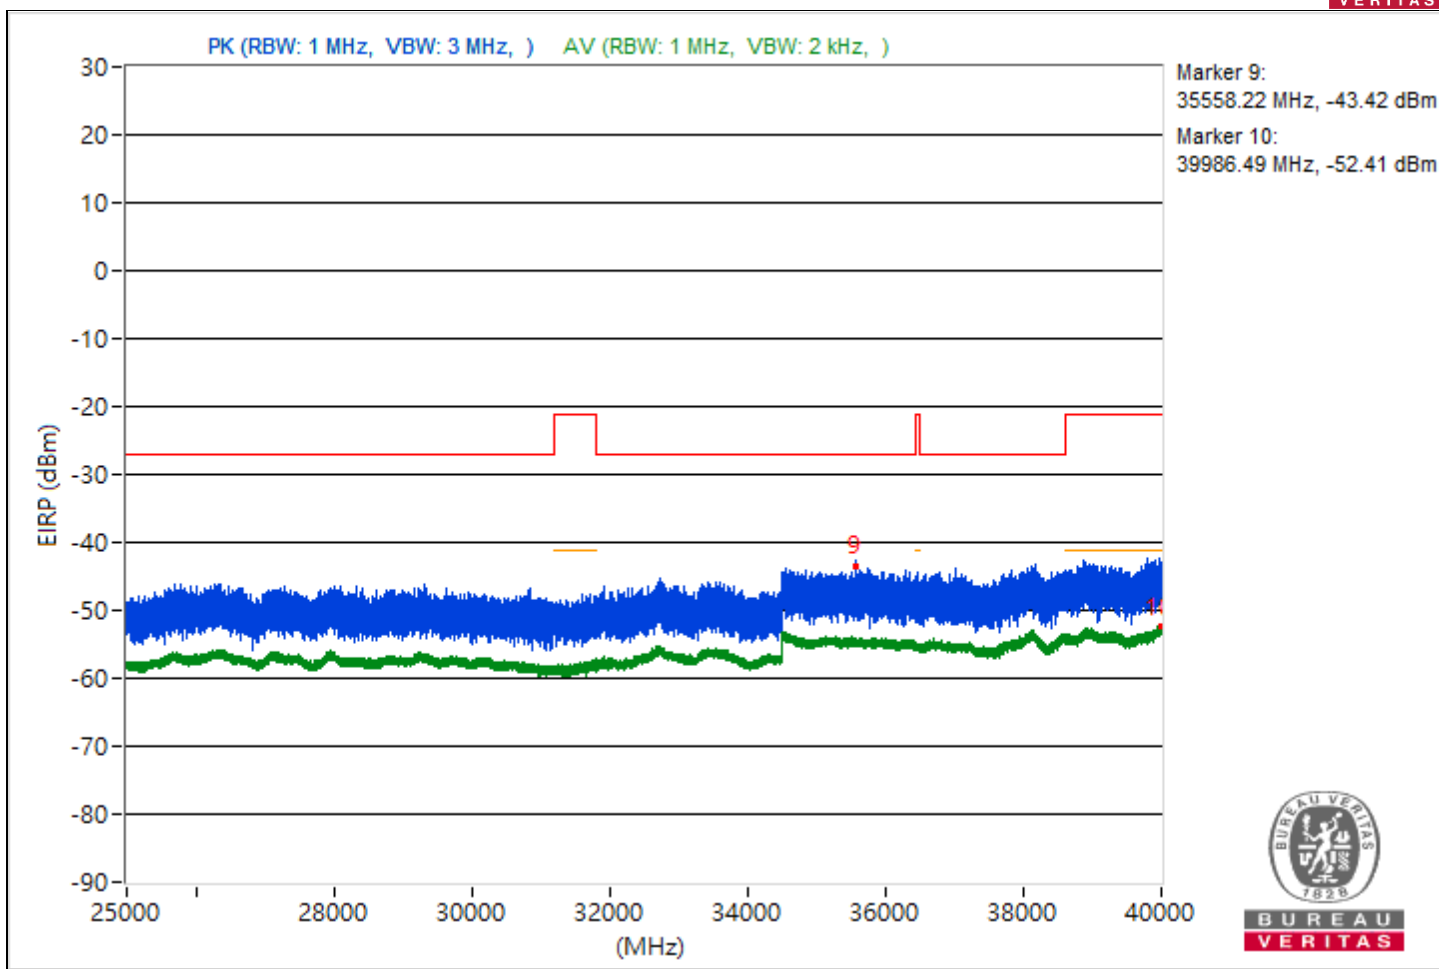





RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4482.03	54.79 PK	68.26	-13.47	-47.13	-50.2	4.92	-40.47
2	3840.52	47.67 AV	54	-6.33	-55.31	-55.75	4.92	-47.59
3	#10215.2	55.9 PK	68.26	-12.36	-46.3	-48.56	4.92	-39.36
4	8419.47	44.99 AV	54	-9.01	-57.86	-58.57	4.92	-50.27
5	#14439.73	55.78 PK	68.26	-12.48	-50.06	-45.77	4.92	-39.48
6	18987.9	46.53 AV	54	-7.47	-56.24	-57.11	4.92	-48.73
7	#24482.2	58.79 PK	68.26	-9.47	-42.15	-49.32	4.92	-36.47
8	23881	49.02 AV	54	-4.98	-53.7	-54.7	4.92	-46.24
9	#38196.53	52.19 PK	68.26	-16.07	-53.55	-49.41	4.92	-43.07
10	39984.44	42.74 AV	54	-11.26	-61.25	-59.78	4.92	-52.52

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

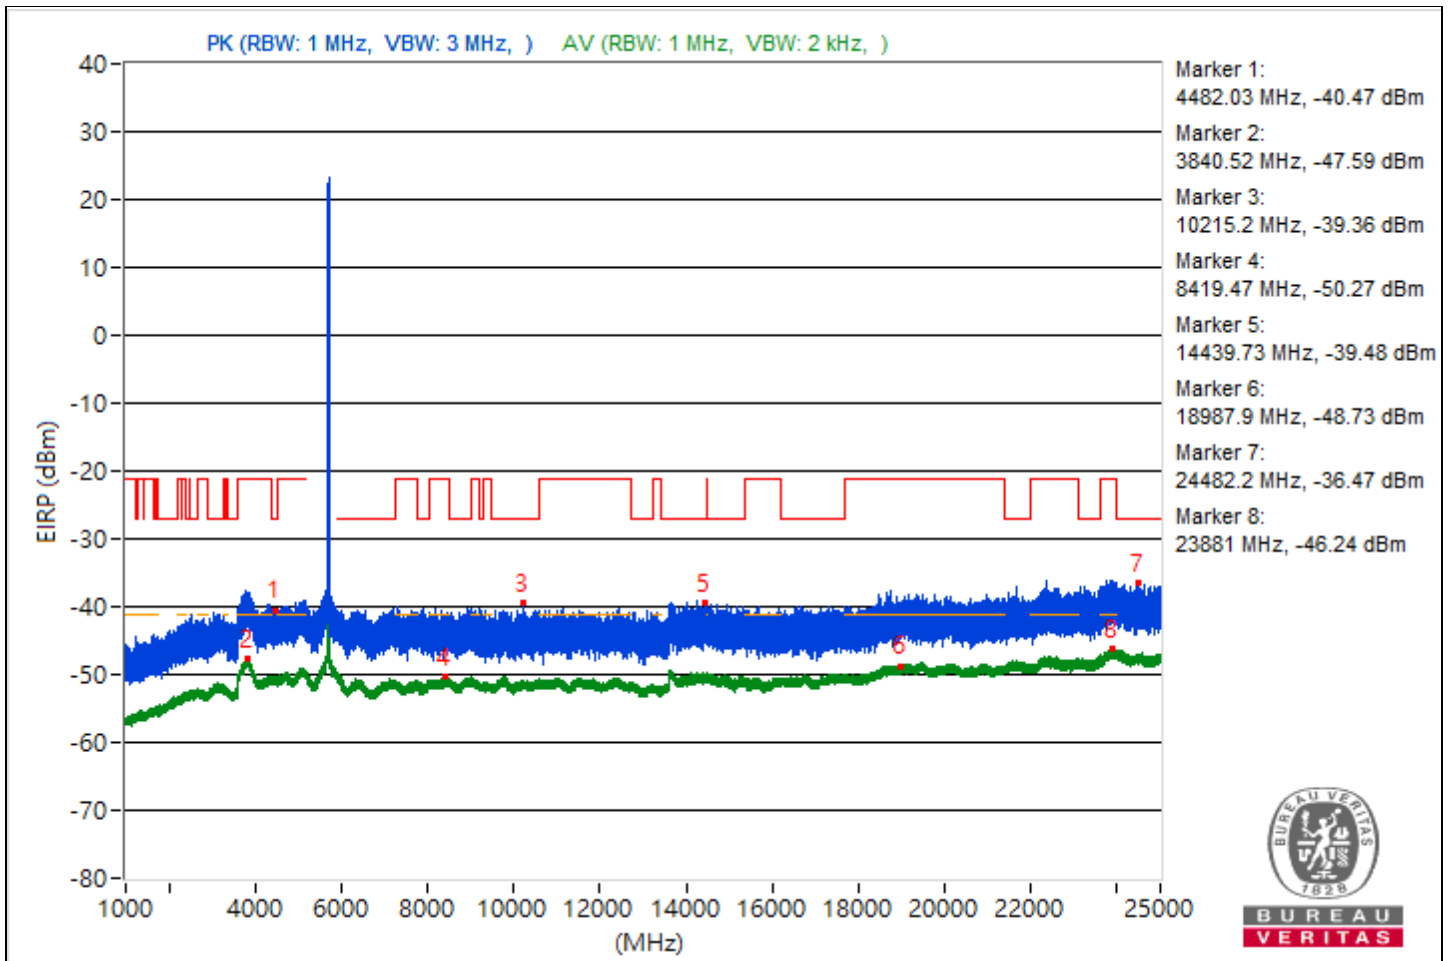

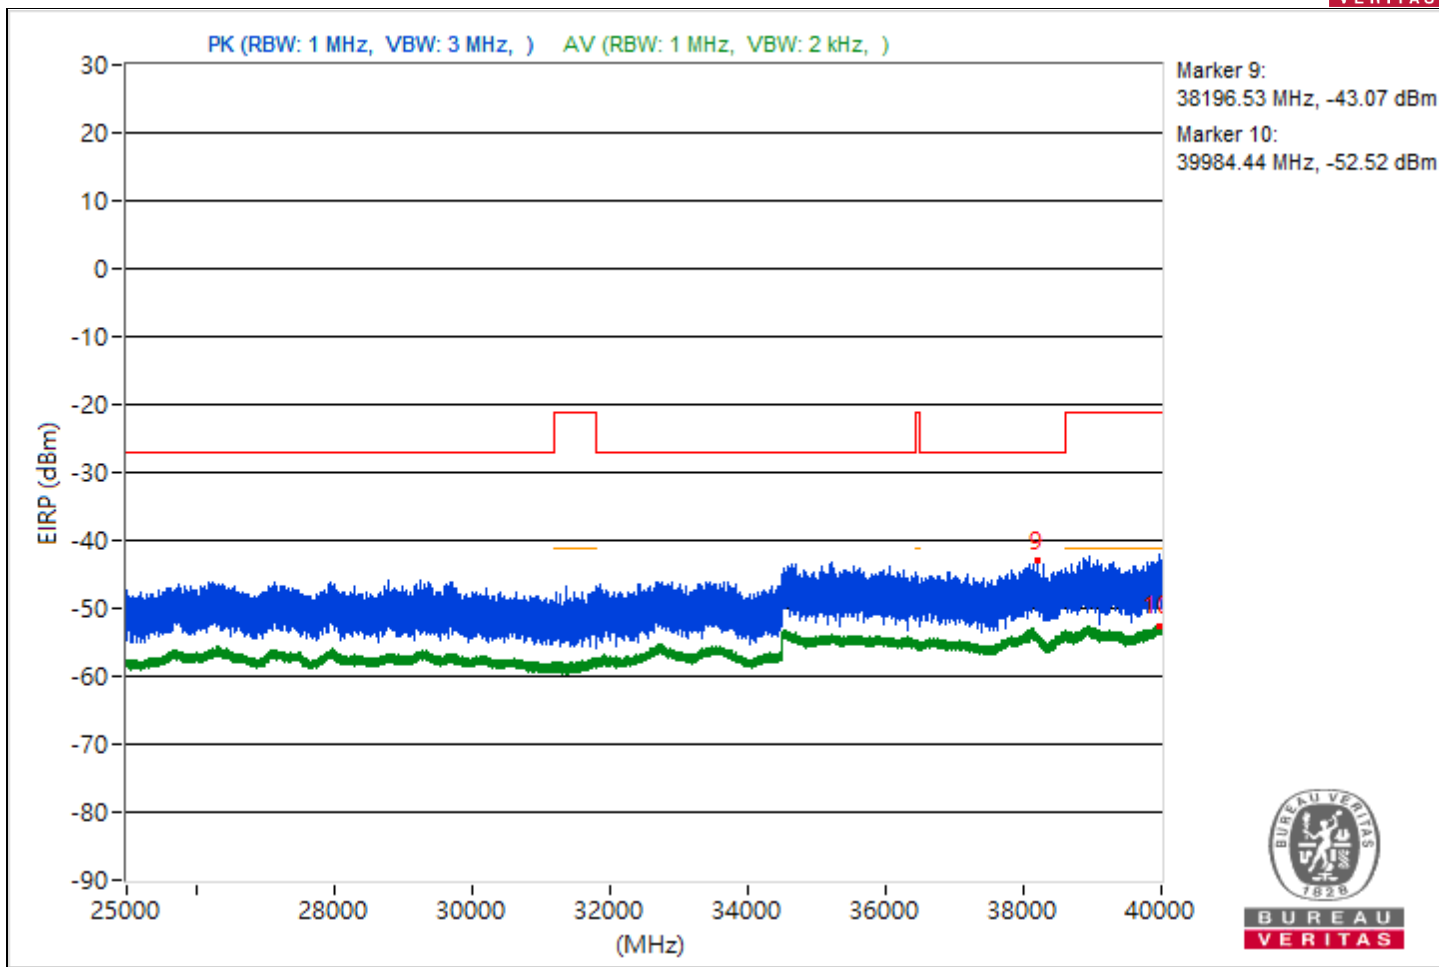



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4484.13	55.82 PK	68.26	-12.44	-46.11	-49.15	4.92	-39.44
2	3821	47.52 AV	54	-6.48	-56.15	-55.24	4.92	-47.74
3	#5959.89	55.22 PK	68.26	-13.04	-51.73	-45.98	4.92	-40.04
4	9004.09	44.58 AV	54	-9.42	-58.12	-59.15	4.92	-50.68
5	#13600.98	55.44 PK	68.26	-12.82	-51.29	-45.83	4.92	-39.82
6	18985.1	46.33 AV	54	-7.67	-57.41	-56.37	4.92	-48.93
7	#24077.1	59.11 PK	68.26	-9.15	-42	-48.19	4.92	-36.15
8	23907	48.95 AV	54	-5.05	-54.45	-54.04	4.92	-46.31
9	#38184.09	51.91 PK	68.26	-16.35	-49.64	-53.97	4.92	-43.35
10	39996.8	42.73 AV	54	-11.27	-60.12	-60.84	4.92	-52.53

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

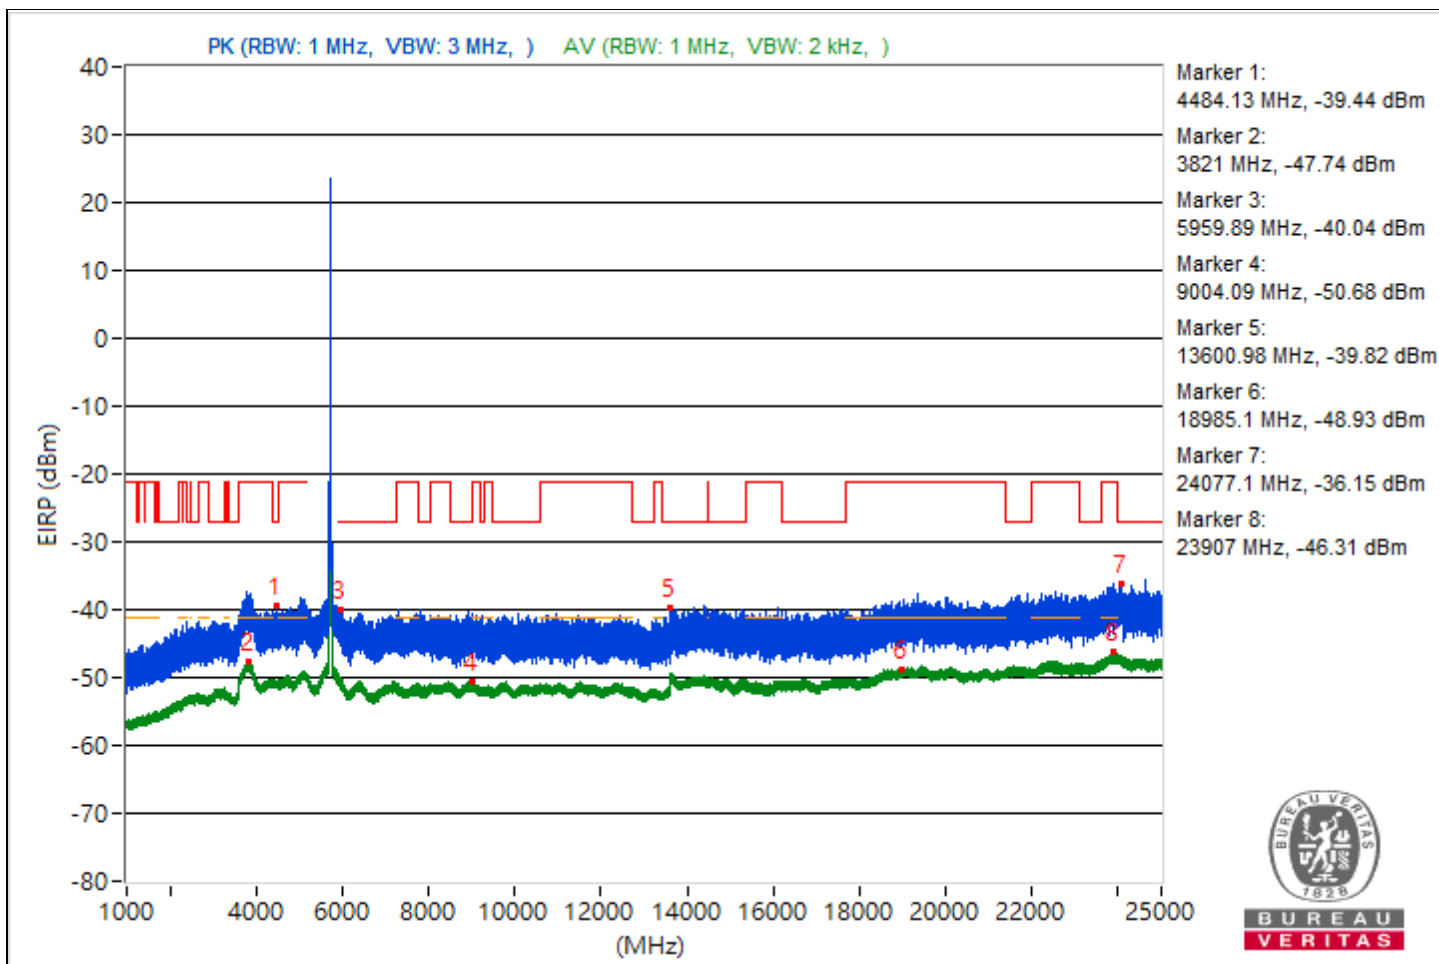

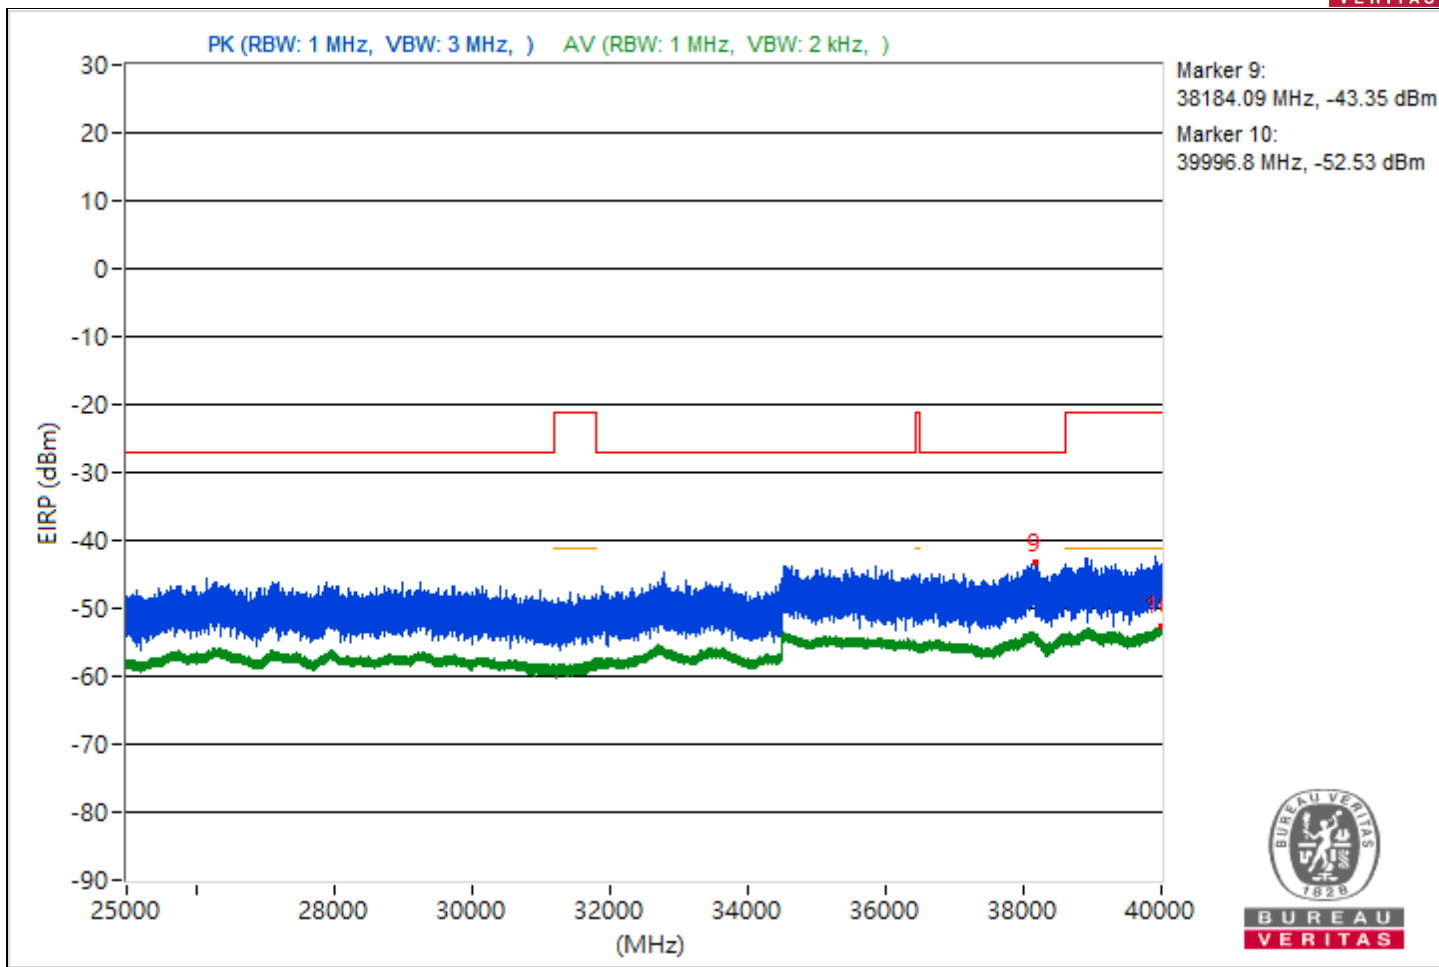



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4456.76	55.06 PK	68.26	-13.2	-49.49	-47.09	4.92	-40.2
2	3805.91	47.59 AV	54	-6.41	-55.41	-55.8	4.92	-47.67
3	#5907.23	57.18 PK	68.26	-11.08	-49.38	-44.14	4.92	-38.08
4	11480	46.81 AV	54	-7.19	-57.1	-55.76	4.92	-48.45
5	#13630.4	56.13 PK	68.26	-12.13	-45.81	-48.82	4.92	-39.13
6	18997.8	46.59 AV	54	-7.41	-57.17	-56.1	4.92	-48.67
7	#24174.2	58.25 PK	68.26	-10.01	-48.21	-43.09	4.92	-37.01
8	23931.1	48.92 AV	54	-5.08	-53.52	-55.18	4.92	-46.34
9	#34705.07	51.91 PK	68.26	-16.35	-54.37	-49.5	4.92	-43.35
10	39988.53	42.9 AV	54	-11.1	-60	-60.6	4.92	-52.36

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

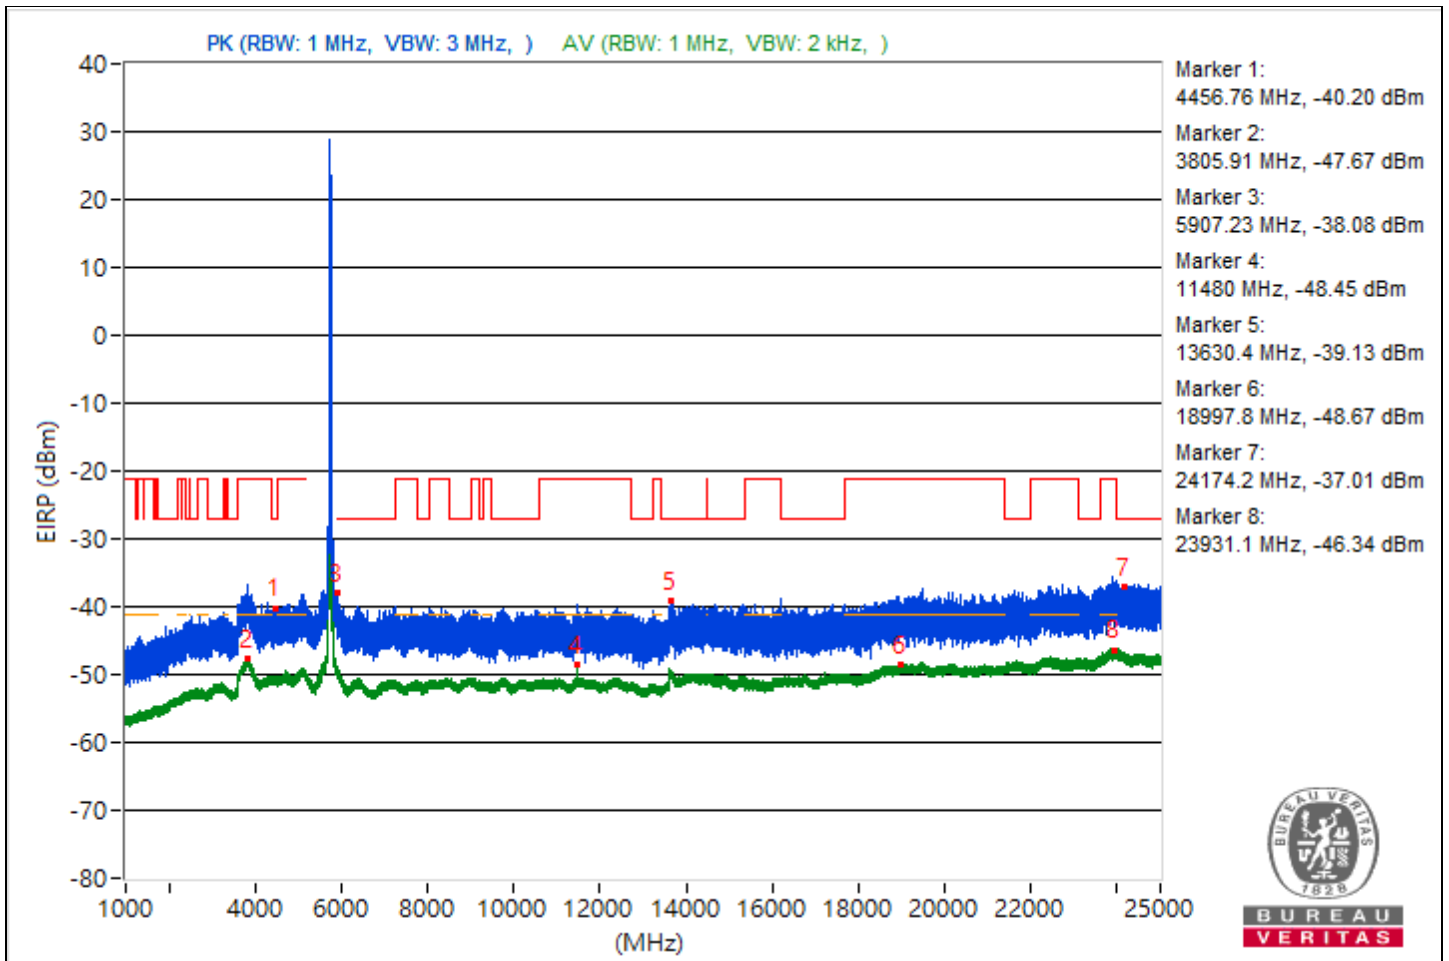

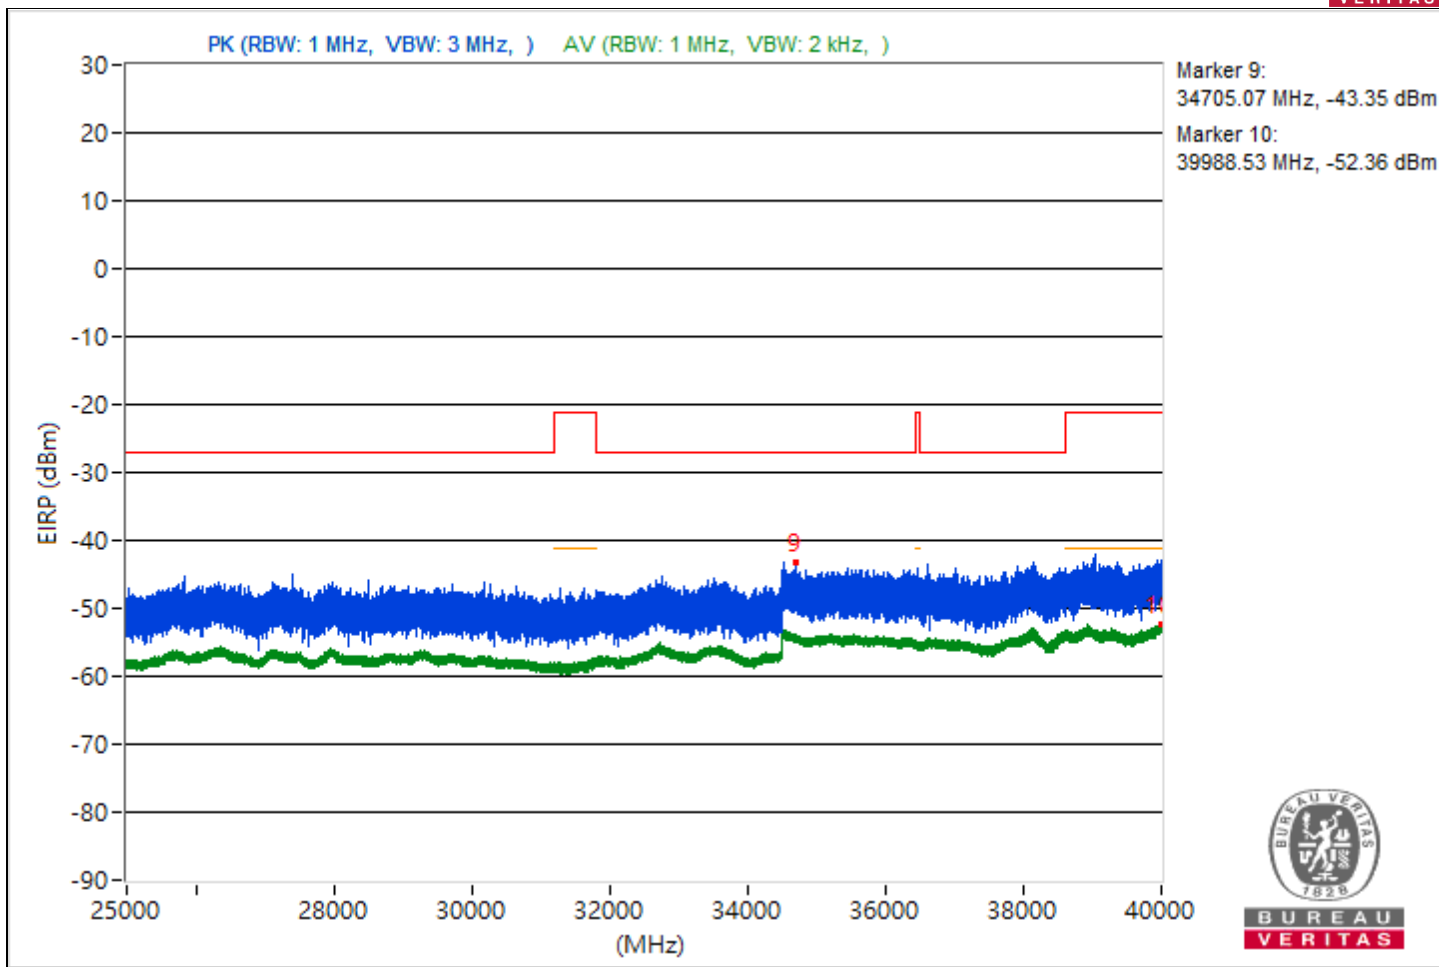



RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4416.78	55.1 PK	68.26	-13.16	-49.84	-46.85	4.92	-40.16
2	3841.53	47.6 AV	54	-6.4	-55.96	-55.24	4.92	-47.66
3	#5906.46	58.34 PK	68.26	-9.92	-44.08	-45.79	4.92	-36.92
4	11661.42	46.89 AV	54	-7.11	-57.38	-55.43	4.92	-48.37
5	#15260.98	56.21 PK	68.26	-12.05	-48.57	-45.82	4.92	-39.05
6	18996.7	46.66 AV	54	-7.34	-56.86	-56.22	4.92	-48.6
7	#24050.8	60.24 PK	68.26	-8.02	-43.44	-42.52	4.92	-35.02
8	23936.4	49.15 AV	54	-4.85	-53.83	-54.27	4.92	-46.11
9	#34544.62	52.13 PK	68.26	-16.13	-48.69	-56.7	4.92	-43.13
10	39998.49	43 AV	54	-11	-60.57	-59.84	4.92	-52.26

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

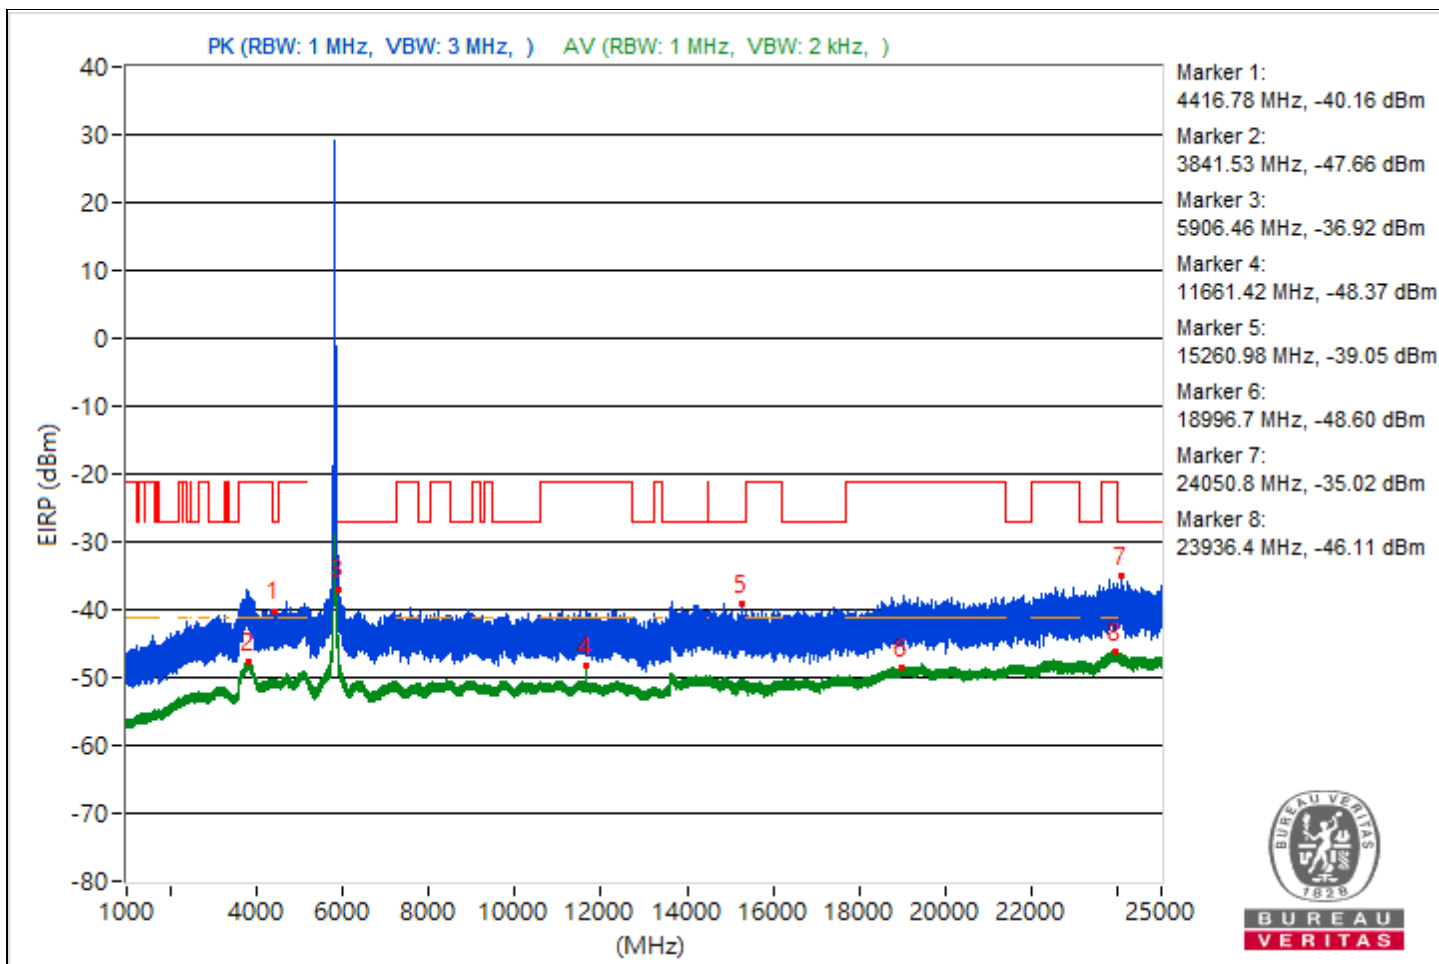

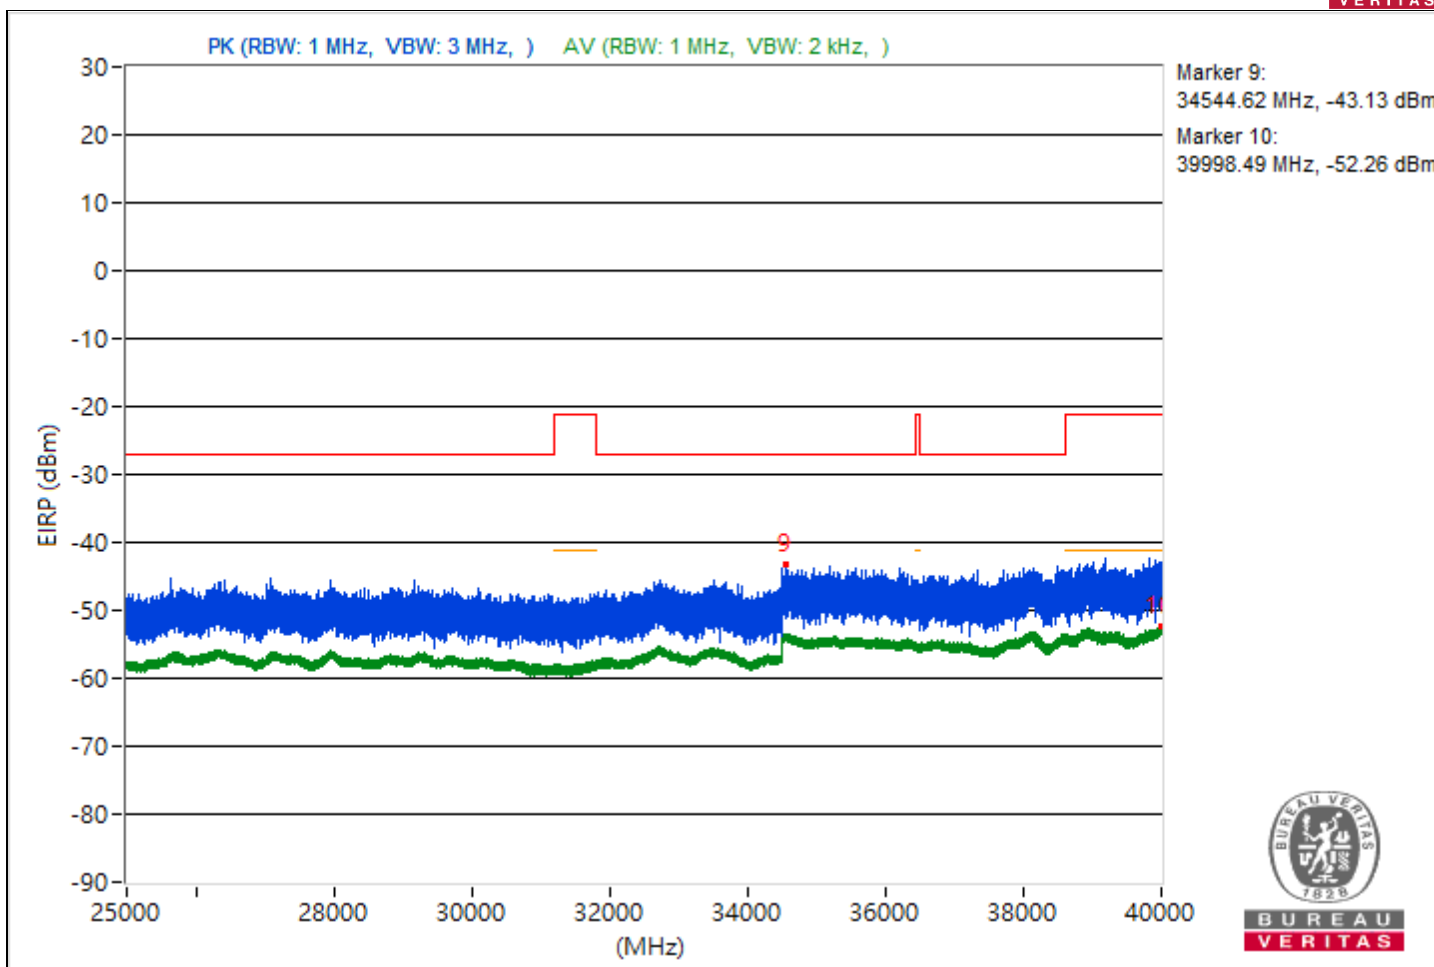





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4469.2	54.58 PK	68.26	-13.68	-46.74	-51.98	4.92	-40.68
2	3841.77	47.45 AV	54	-6.55	-55.25	-56.3	4.92	-47.81
3	#7167	55.84 PK	68.26	-12.42	-45.36	-51.14	4.92	-39.42
4	8420.36	45 AV	54	-9	-57.88	-58.54	4.92	-50.26
5	#17372	56.17 PK	68.26	-12.09	-49.4	-45.49	4.92	-39.09
6	18700.5	46.27 AV	54	-7.73	-56.35	-57.57	4.92	-48.99
7	#24067.2	58.63 PK	68.26	-9.63	-48.47	-42.53	4.92	-36.63
8	23958.2	48.95 AV	54	-5.05	-54.82	-53.74	4.92	-46.31
9	#37922.93	52.3 PK	68.26	-15.96	-49.48	-53	4.92	-42.96
10	39995.29	42.67 AV	54	-11.33	-61.11	-60	4.92	-52.59

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

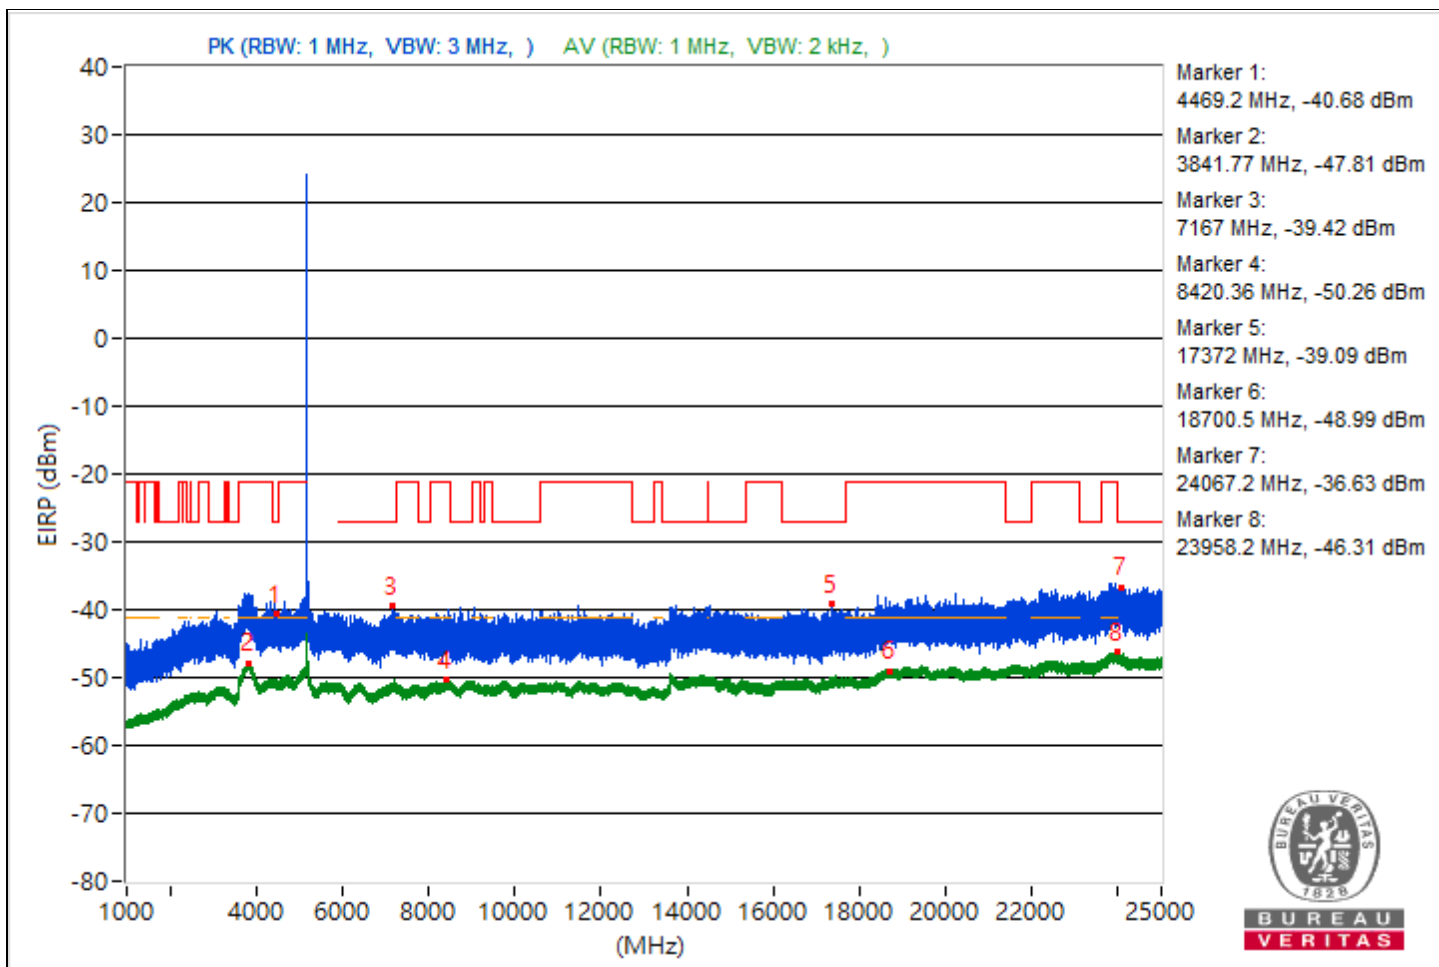

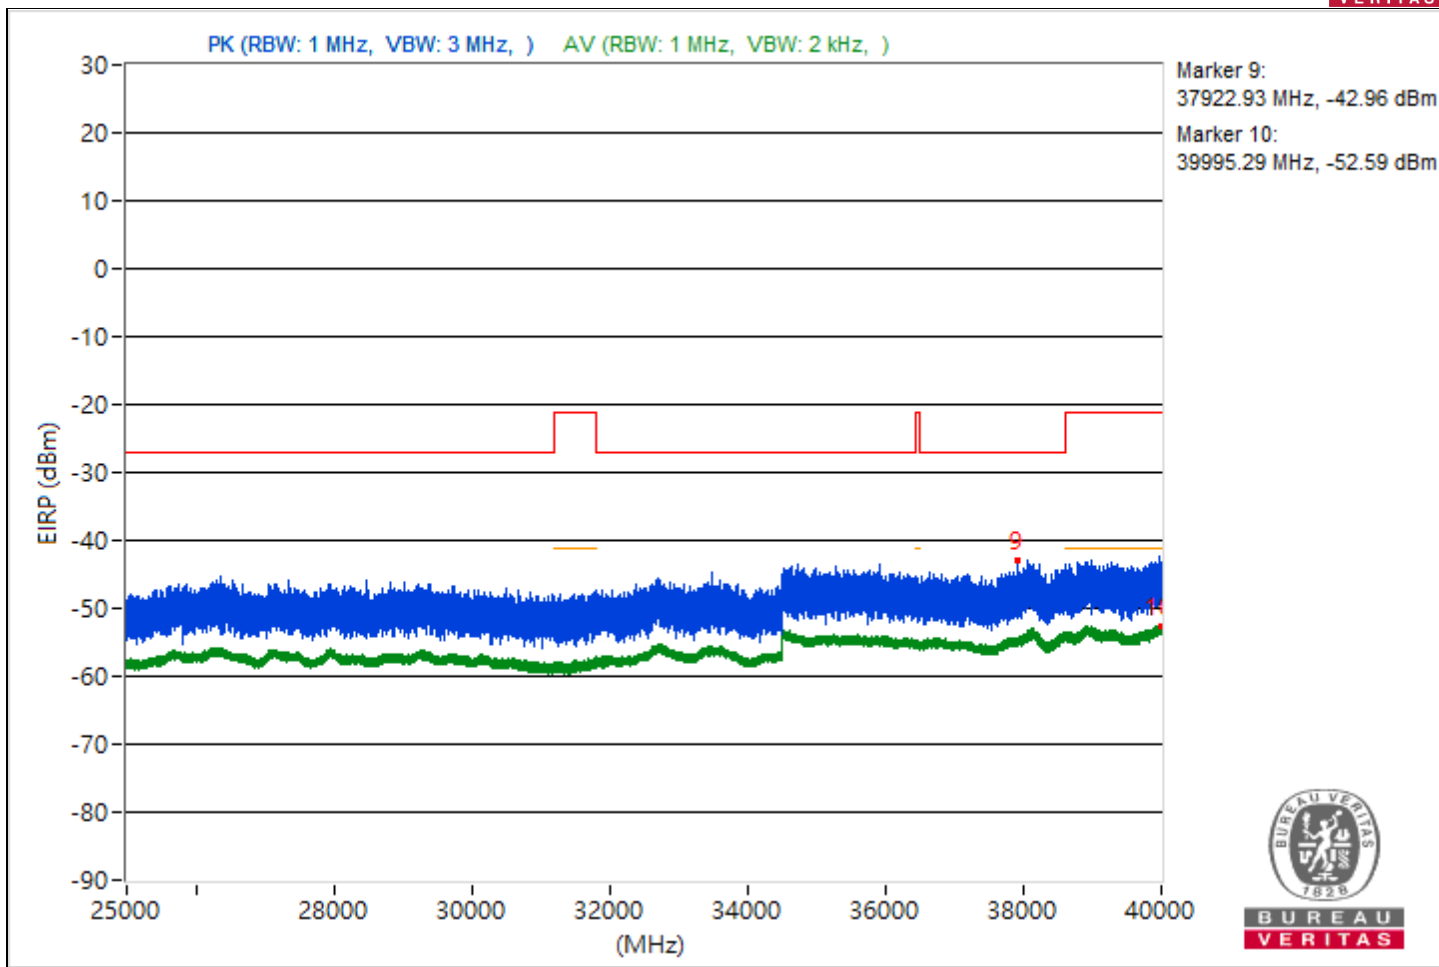



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4474.8	54.86 PK	68.26	-13.4	-46.93	-50.42	4.92	-40.4
2	3859.97	47.52 AV	54	-6.48	-56.01	-55.35	4.92	-47.74
3	#5974.74	55.11 PK	68.26	-13.15	-46.38	-50.92	4.92	-40.15
4	11473.96	49.46 AV	54	-4.54	-53.81	-53.64	4.92	-45.8
5	#14385.87	55.98 PK	68.26	-12.28	-53.89	-44.7	4.92	-39.28
6	18989.7	46.49 AV	54	-7.51	-56.38	-57.05	4.92	-48.77
7	#24461.1	58.21 PK	68.26	-10.05	-43.45	-47.35	4.92	-37.05
8	23870.1	49.01 AV	54	-4.99	-54.54	-53.85	4.92	-46.25
9	#34503.56	52.06 PK	68.26	-16.2	-54.69	-49.2	4.92	-43.2
10	39982.58	43.07 AV	54	-10.93	-60.57	-59.71	4.92	-52.19

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

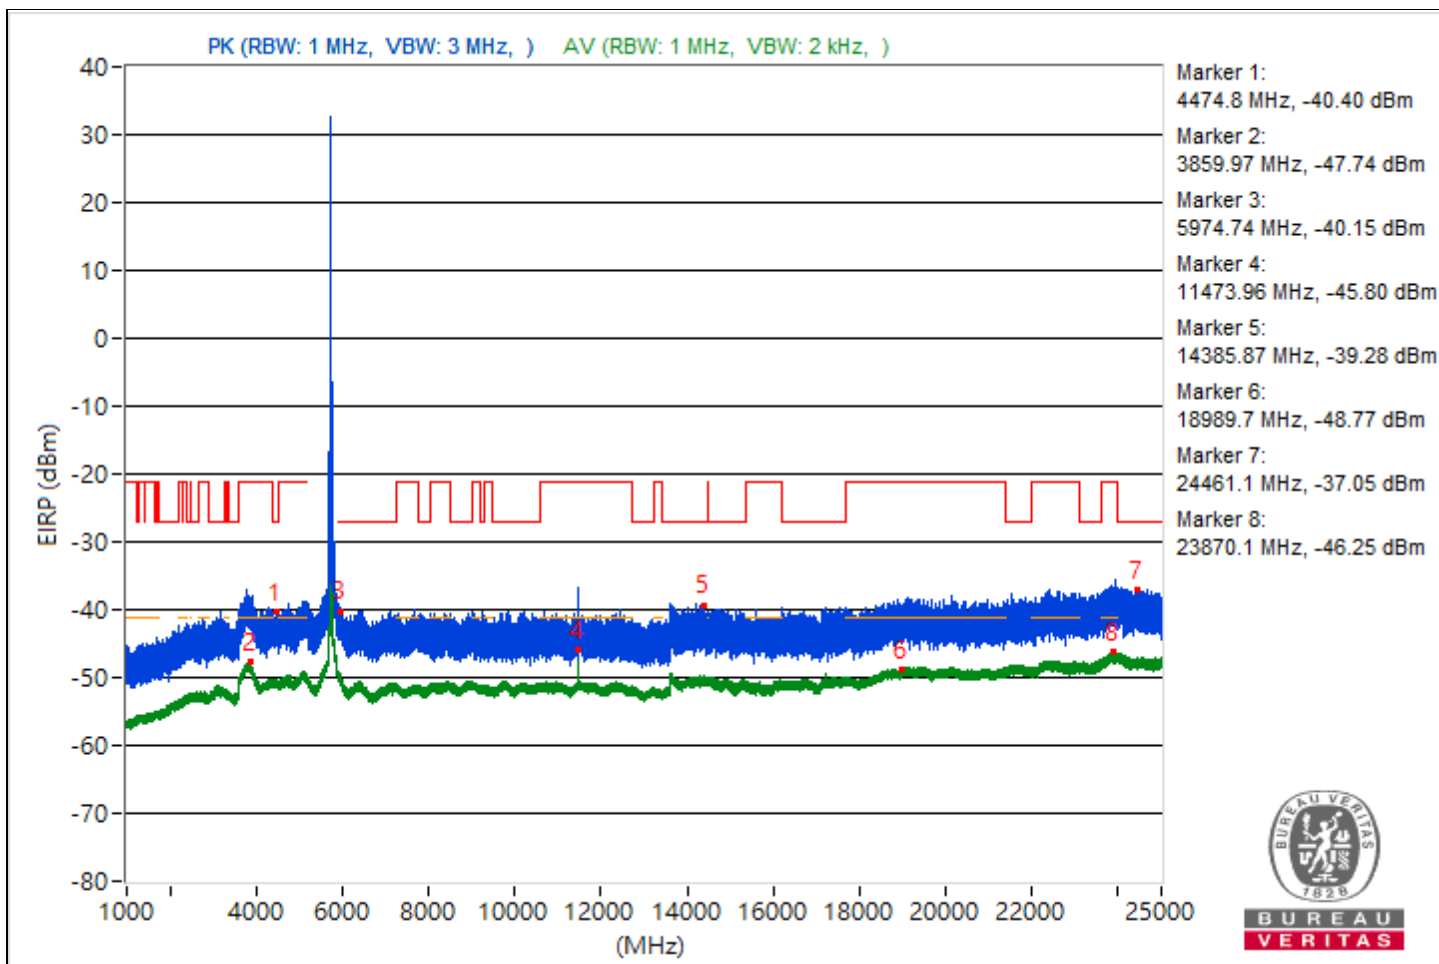

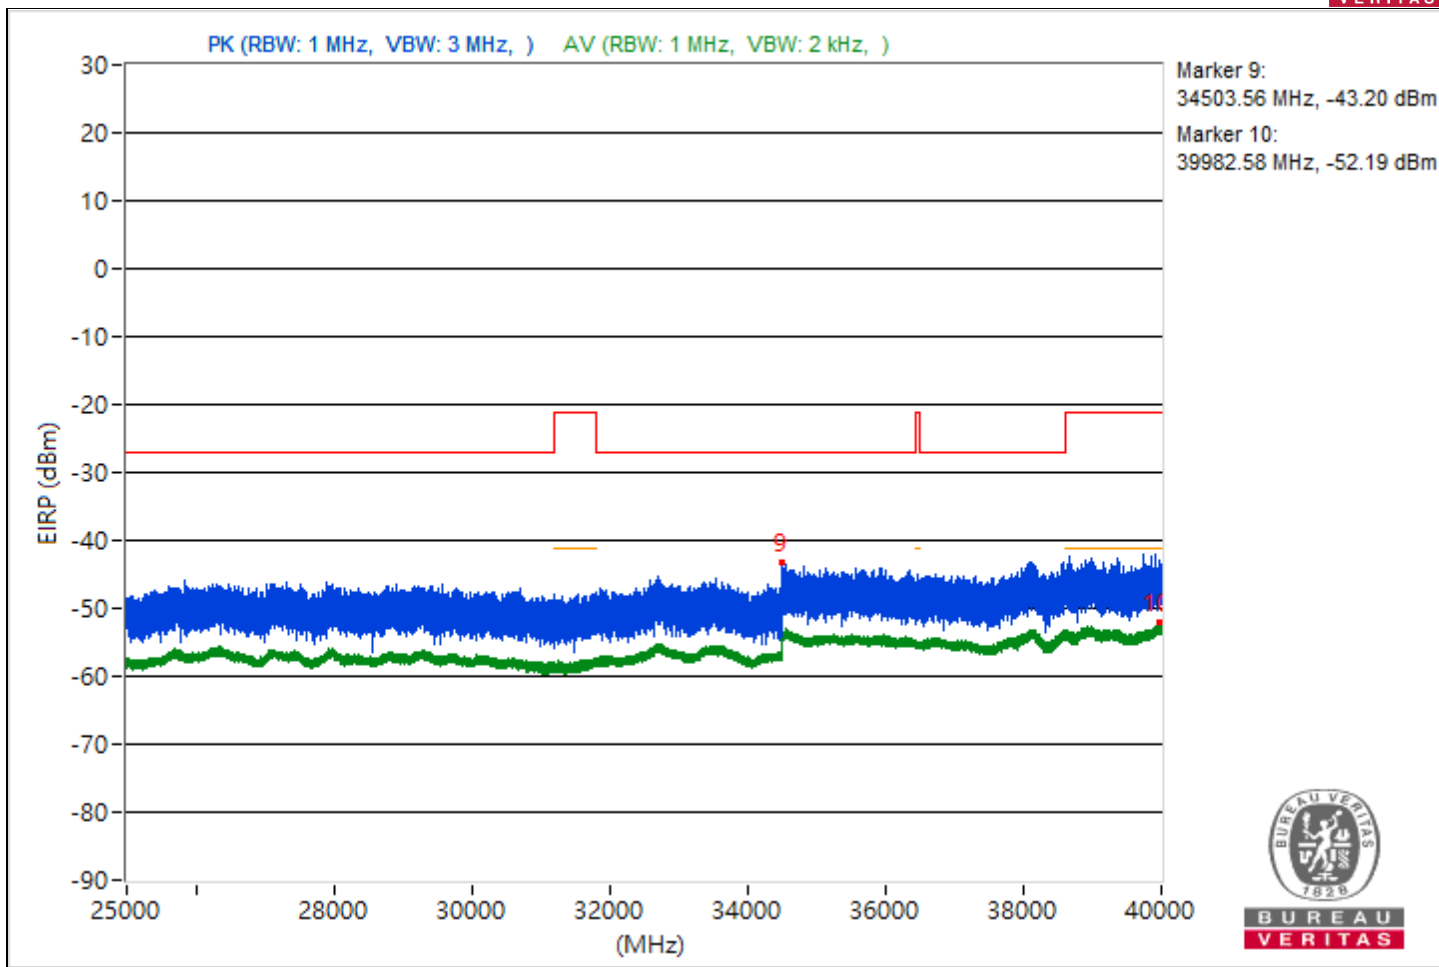



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4443.69	55.6 PK	68.26	-12.66	-48.89	-46.59	4.92	-39.66
2	3814	47.45 AV	54	-6.55	-56.28	-55.27	4.92	-47.81
3	#5903.11	58.59 PK	68.26	-9.67	-46.11	-43.48	4.92	-36.67
4	11667.29	49.75 AV	54	-4.25	-55.75	-51.94	4.92	-45.51
5	#13600	56.13 PK	68.26	-12.13	-45.17	-50.49	4.92	-39.13
6	18967	46.45 AV	54	-7.55	-57.45	-56.14	4.92	-48.81
7	#24018.5	58.84 PK	68.26	-9.42	-47	-42.71	4.92	-36.42
8	23865.6	48.91 AV	54	-5.09	-53.64	-55.02	4.92	-46.35
9	#37847.02	51.72 PK	68.26	-16.54	-49.21	-56.43	4.92	-43.54
10	39989.69	43.1 AV	54	-10.9	-59.85	-60.34	4.92	-52.16

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

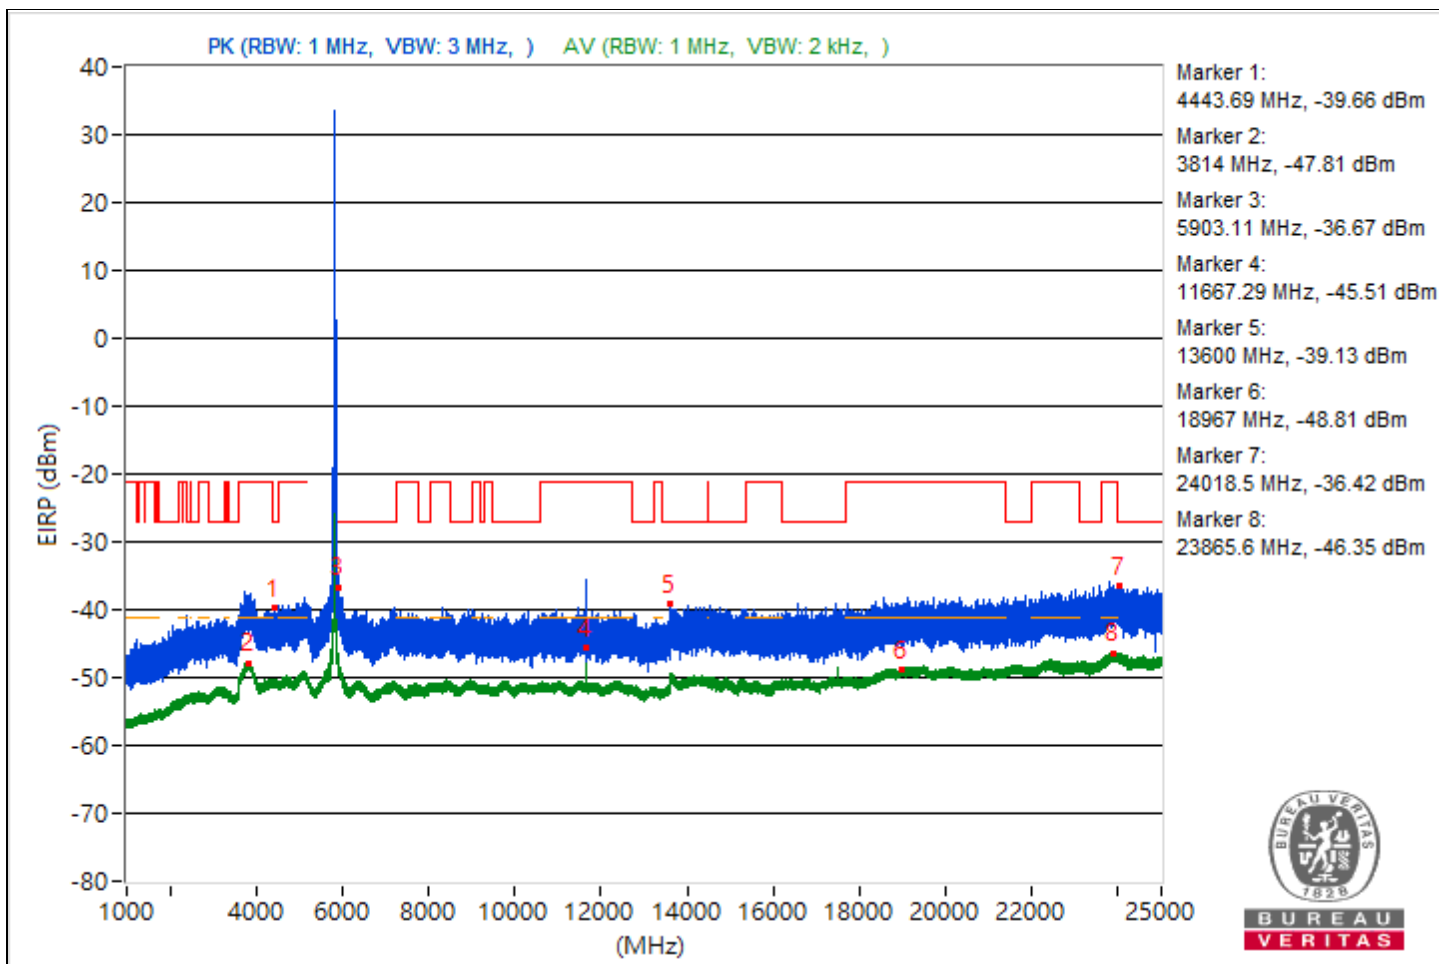

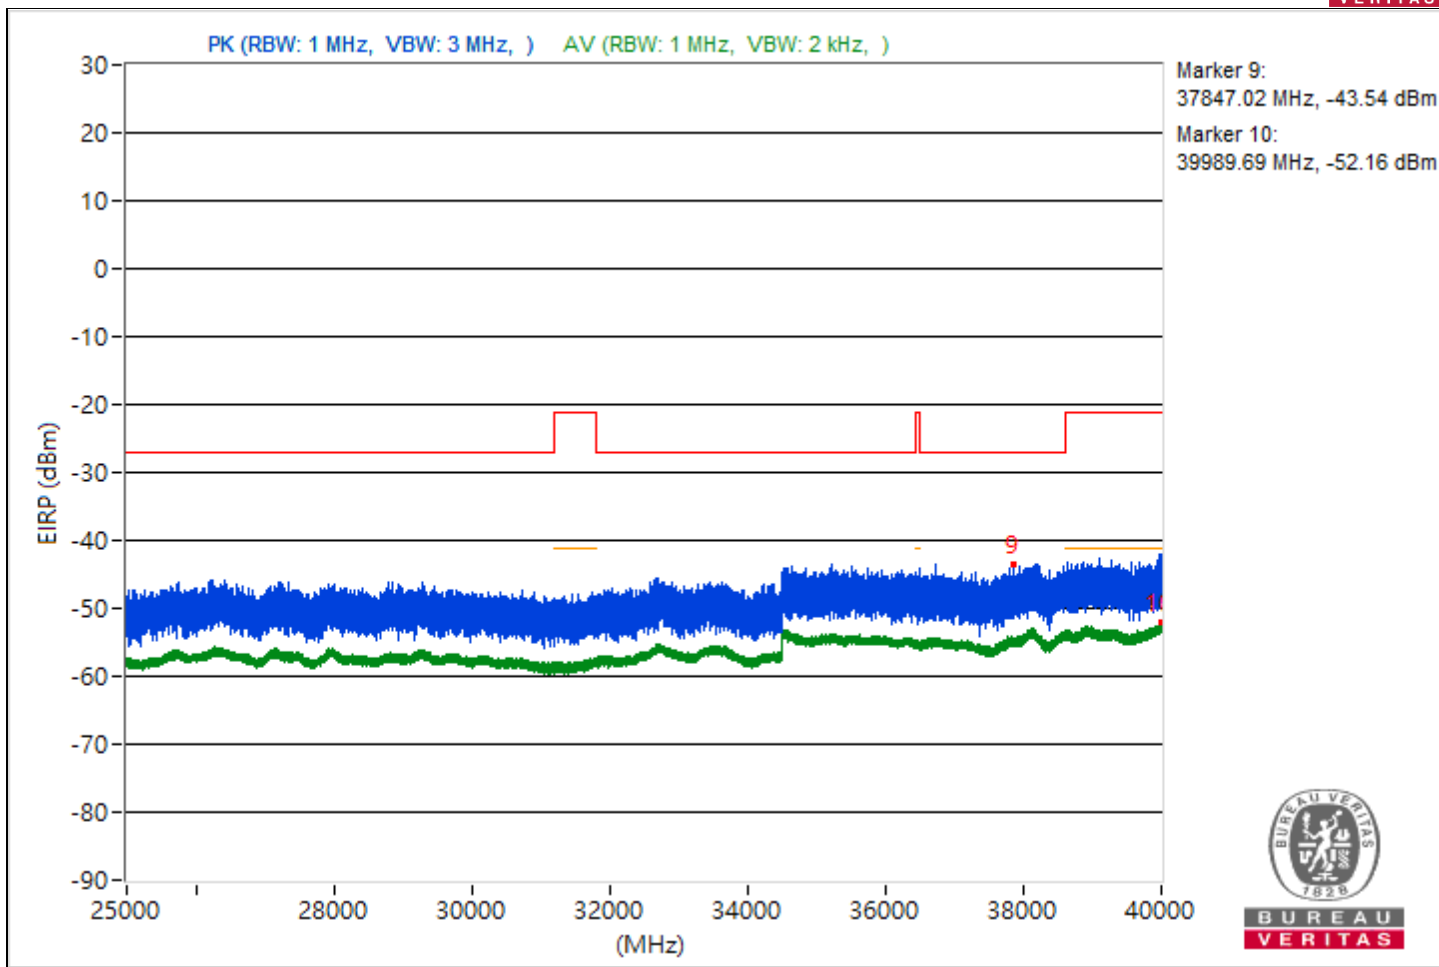



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4481.02	54.75 PK	68.26	-13.51	-51.51	-46.66	4.92	-40.51
2	3841.92	47.71 AV	54	-6.29	-55.92	-55.07	4.92	-47.55
3	#6457.51	55.06 PK	68.26	-13.2	-45.82	-53.36	4.92	-40.2
4	8437.78	44.67 AV	54	-9.33	-58.08	-59.01	4.92	-50.59
5	#14430.4	56.12 PK	68.26	-12.14	-49.03	-45.72	4.92	-39.14
6	18992.9	46.45 AV	54	-7.55	-57.25	-56.28	4.92	-48.81
7	#24018.4	60.06 PK	68.26	-8.2	-46.12	-41.38	4.92	-35.2
8	23864.3	49.23 AV	54	-4.77	-53.61	-54.35	4.92	-46.03
9	#38146.22	51.49 PK	68.26	-16.77	-54.8	-49.91	4.92	-43.77
10	39996.27	42.89 AV	54	-11.11	-59.83	-60.84	4.92	-52.37

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

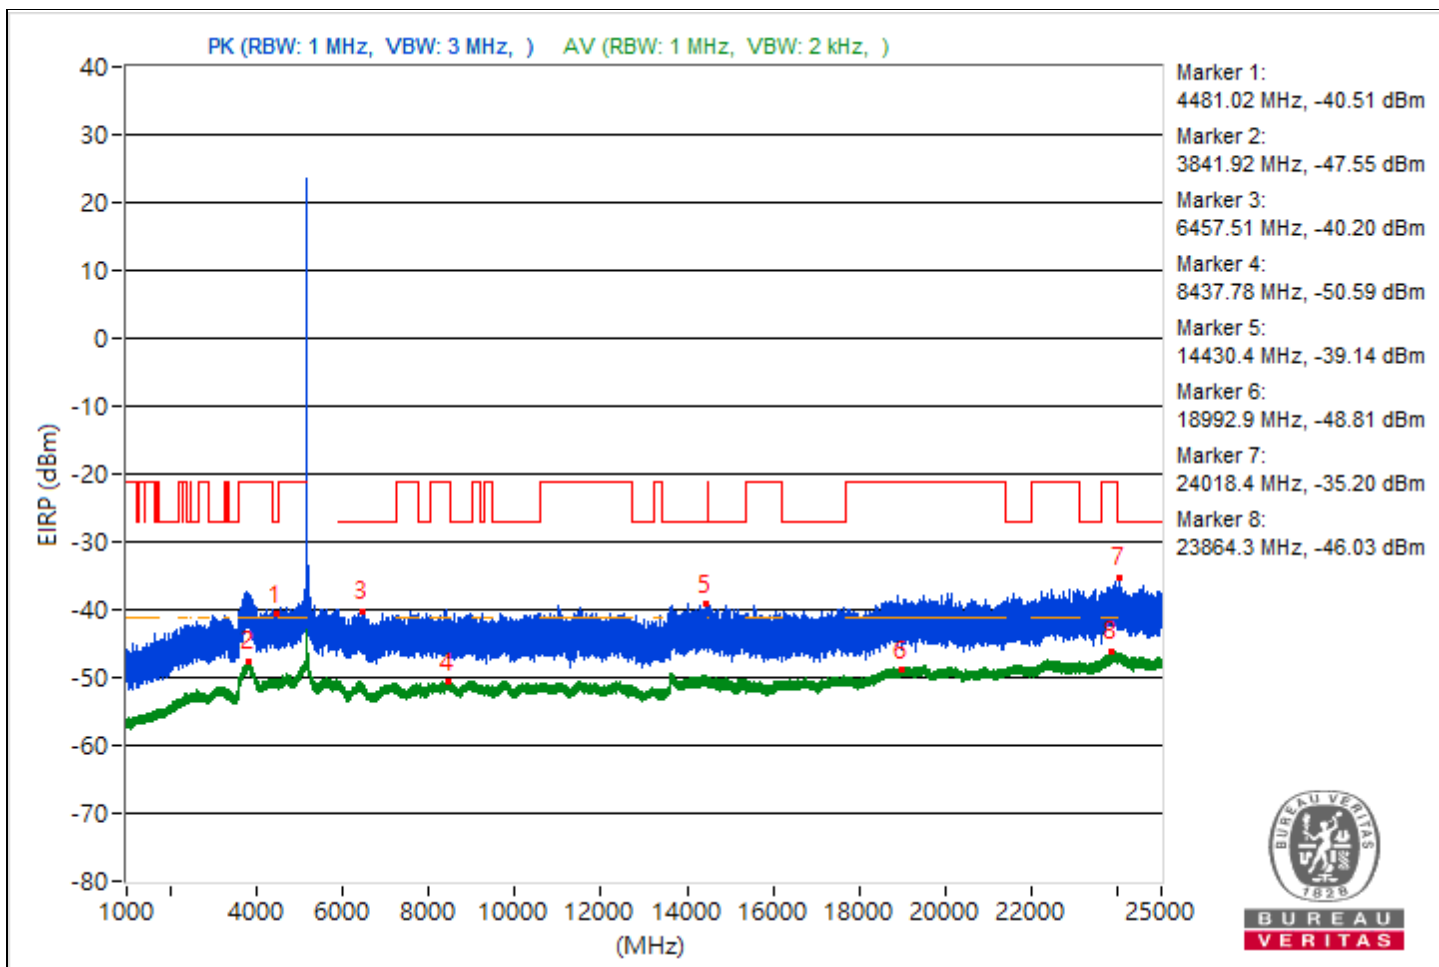

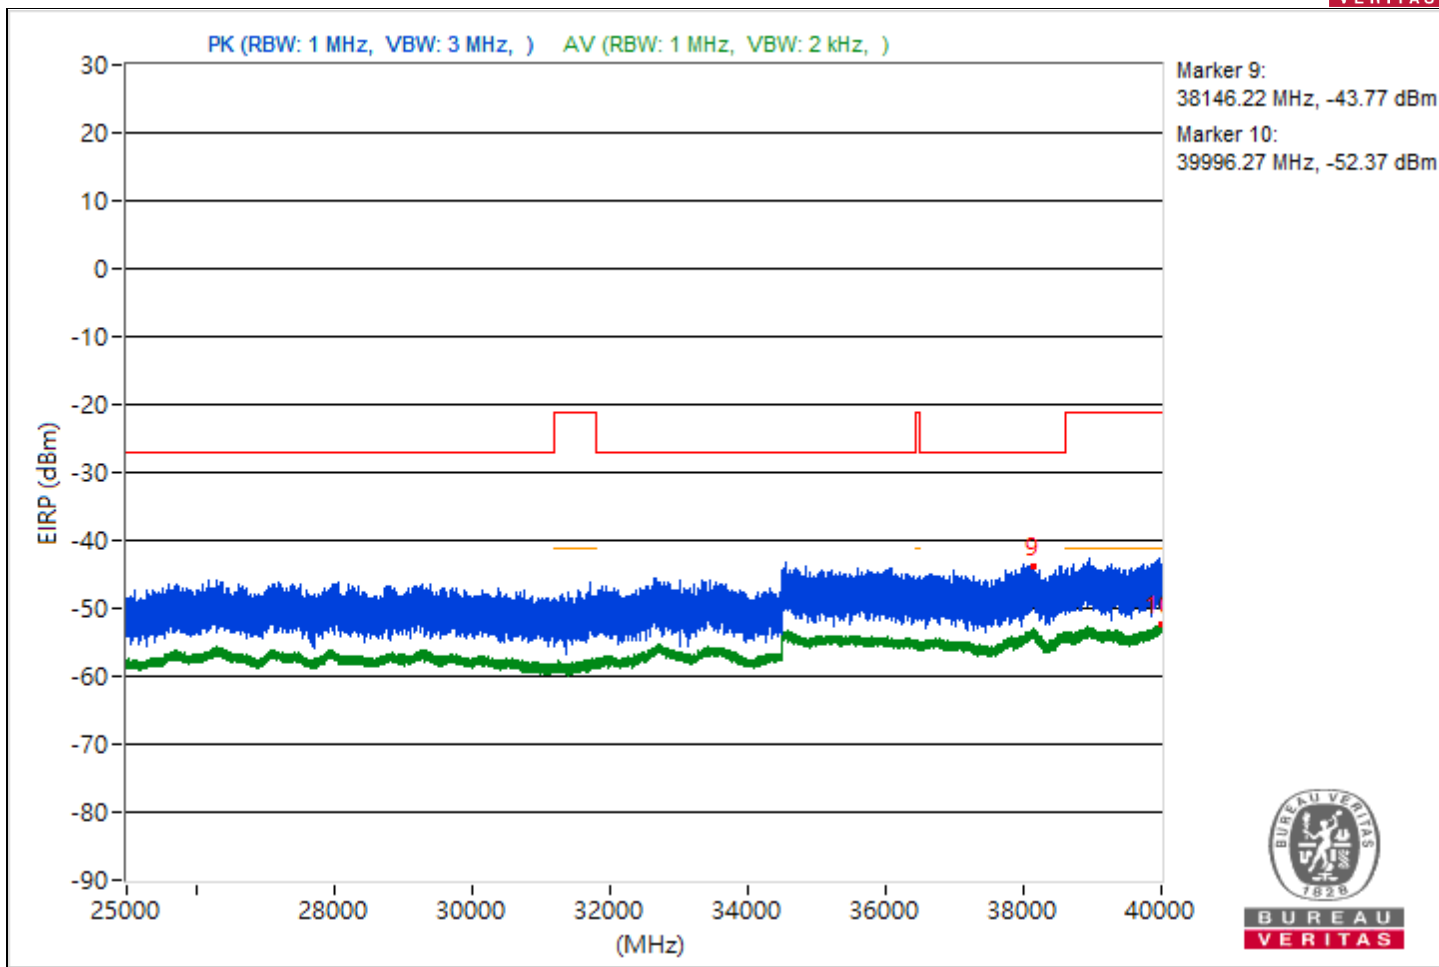





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4496.19	54.86 PK	68.26	-13.4	-46.61	-51.24	4.92	-40.4
2	3804.82	47.43 AV	54	-6.57	-55.3	-56.27	4.92	-47.83
3	#5963.93	55.21 PK	68.26	-13.05	-46.45	-50.37	4.92	-40.05
4	11475.73	47.62 AV	54	-6.38	-56.21	-55.02	4.92	-47.64
5	#17215.1	55.51 PK	68.26	-12.75	-46.09	-50.2	4.92	-39.75
6	18759.8	46.48 AV	54	-7.52	-57.28	-56.2	4.92	-48.78
7	#24031.7	58.97 PK	68.26	-9.29	-43	-45.93	4.92	-36.29
8	23776.6	48.89 AV	54	-5.11	-54.82	-53.83	4.92	-46.37
9	#38117.24	51.83 PK	68.26	-16.43	-54.88	-49.44	4.92	-43.43
10	39994.49	42.87 AV	54	-11.13	-60.8	-59.89	4.92	-52.39

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

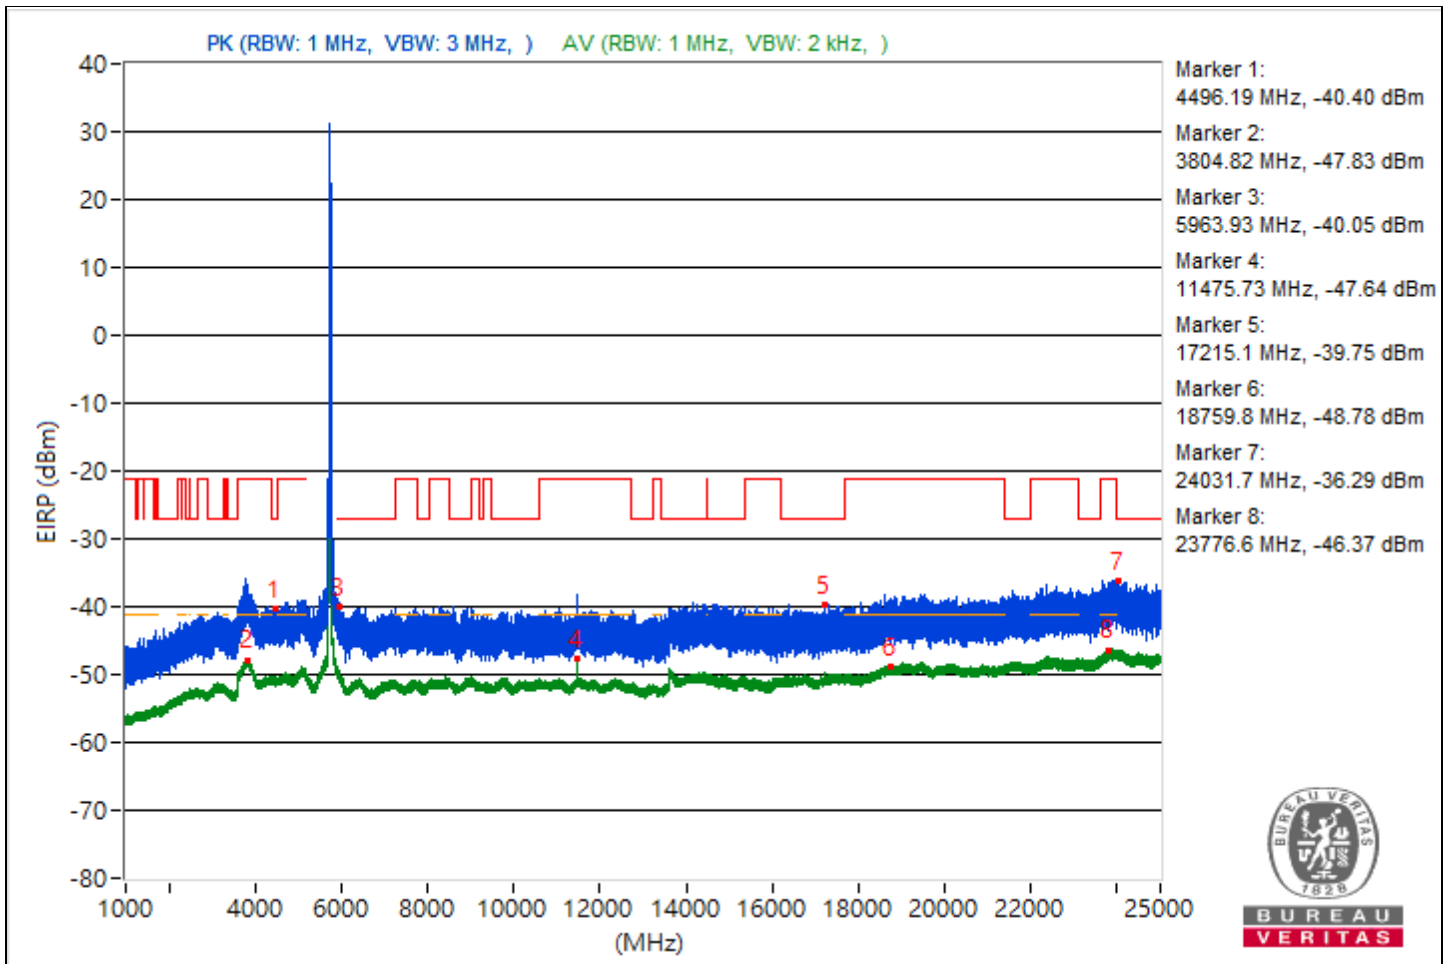

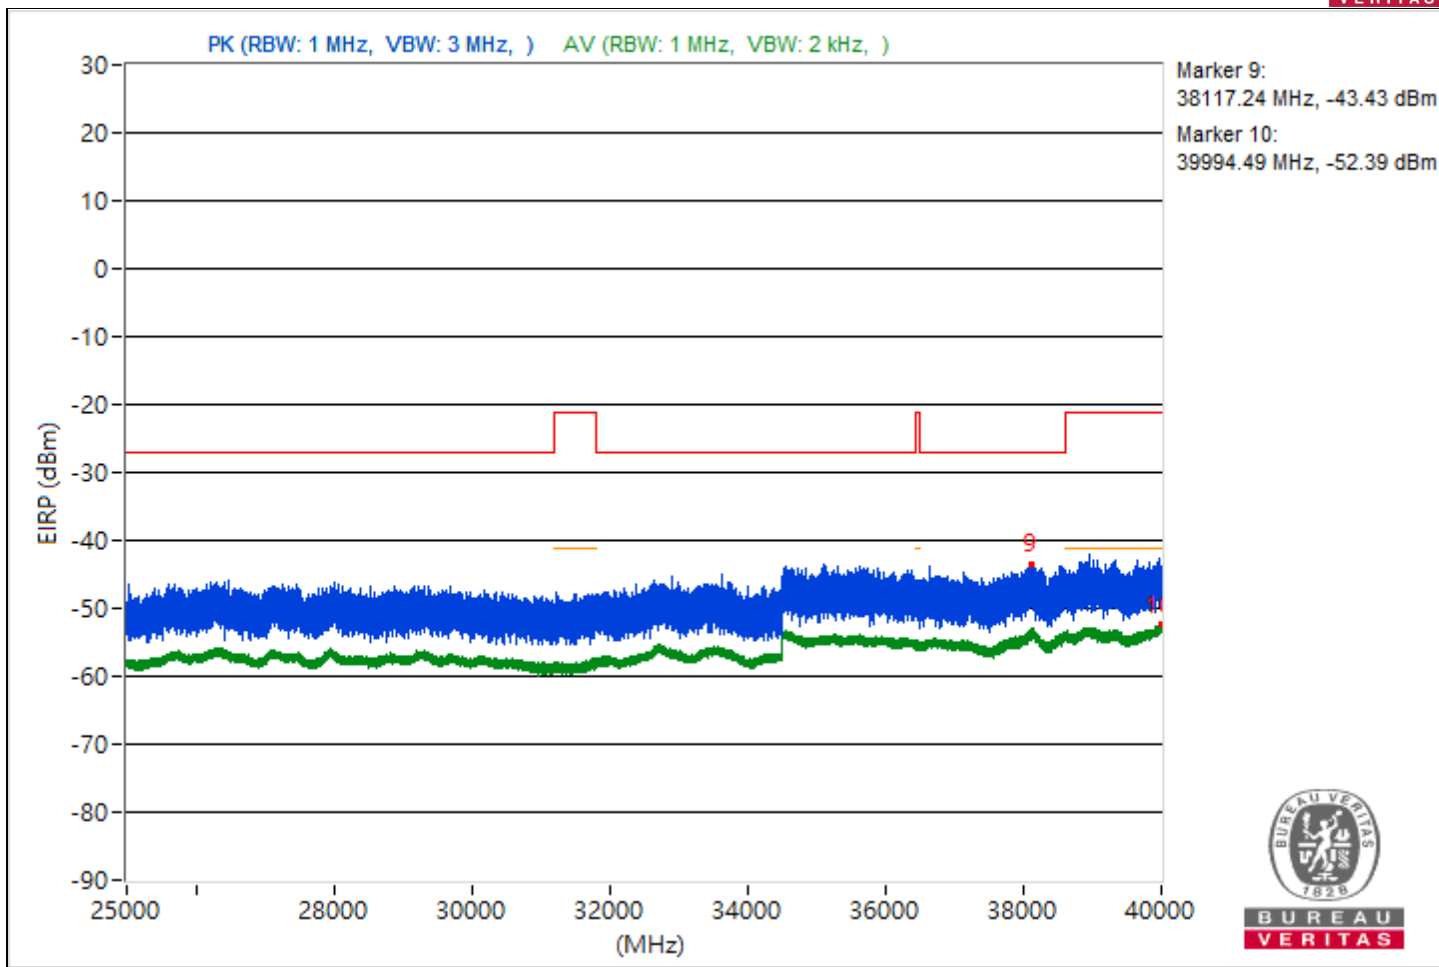



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4484.91	54.44 PK	68.26	-13.82	-51.78	-46.99	4.92	-40.82
2	3824.97	47.73 AV	54	-6.27	-55.66	-55.26	4.92	-47.53
3	#5906.46	59.4 PK	68.26	-8.86	-42.58	-45.48	4.92	-35.86
4	11665.33	48.75 AV	54	-5.25	-56.85	-52.9	4.92	-46.51
5	#14319.73	56.16 PK	68.26	-12.1	-45.46	-49.51	4.92	-39.1
6	18972.1	46.47 AV	54	-7.53	-56.22	-57.29	4.92	-48.79
7	#24075.1	59.33 PK	68.26	-8.93	-48.05	-41.77	4.92	-35.93
8	23894.7	48.99 AV	54	-5.01	-53.65	-54.84	4.92	-46.27
9	#36792.8	51.29 PK	68.26	-16.97	-56.82	-49.65	4.92	-43.97
10	39971.56	43.02 AV	54	-10.98	-60.24	-60.11	4.92	-52.24

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

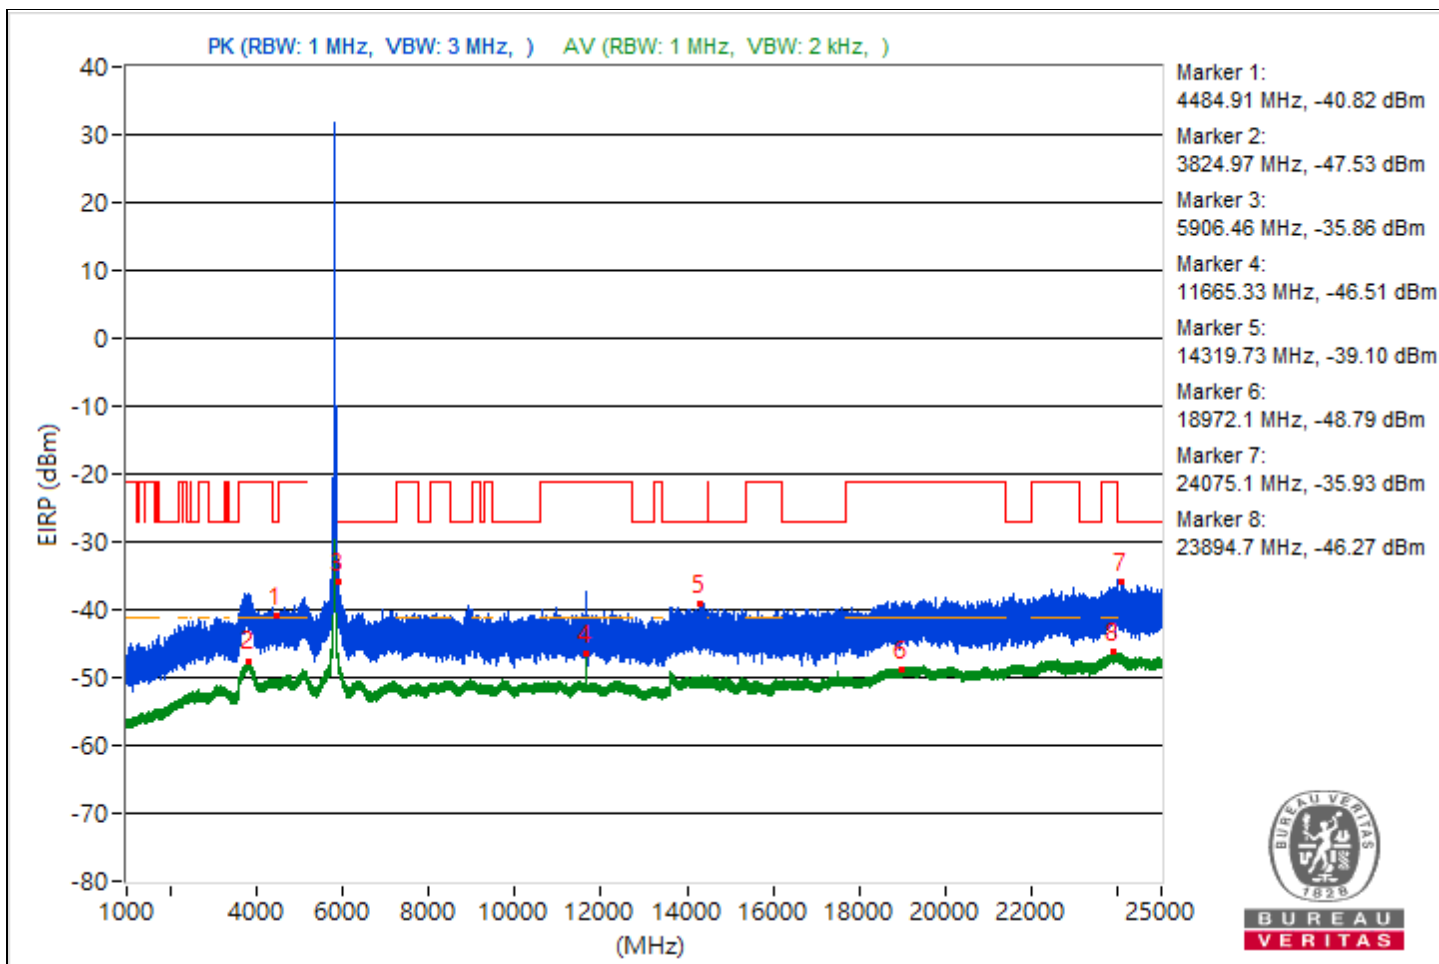

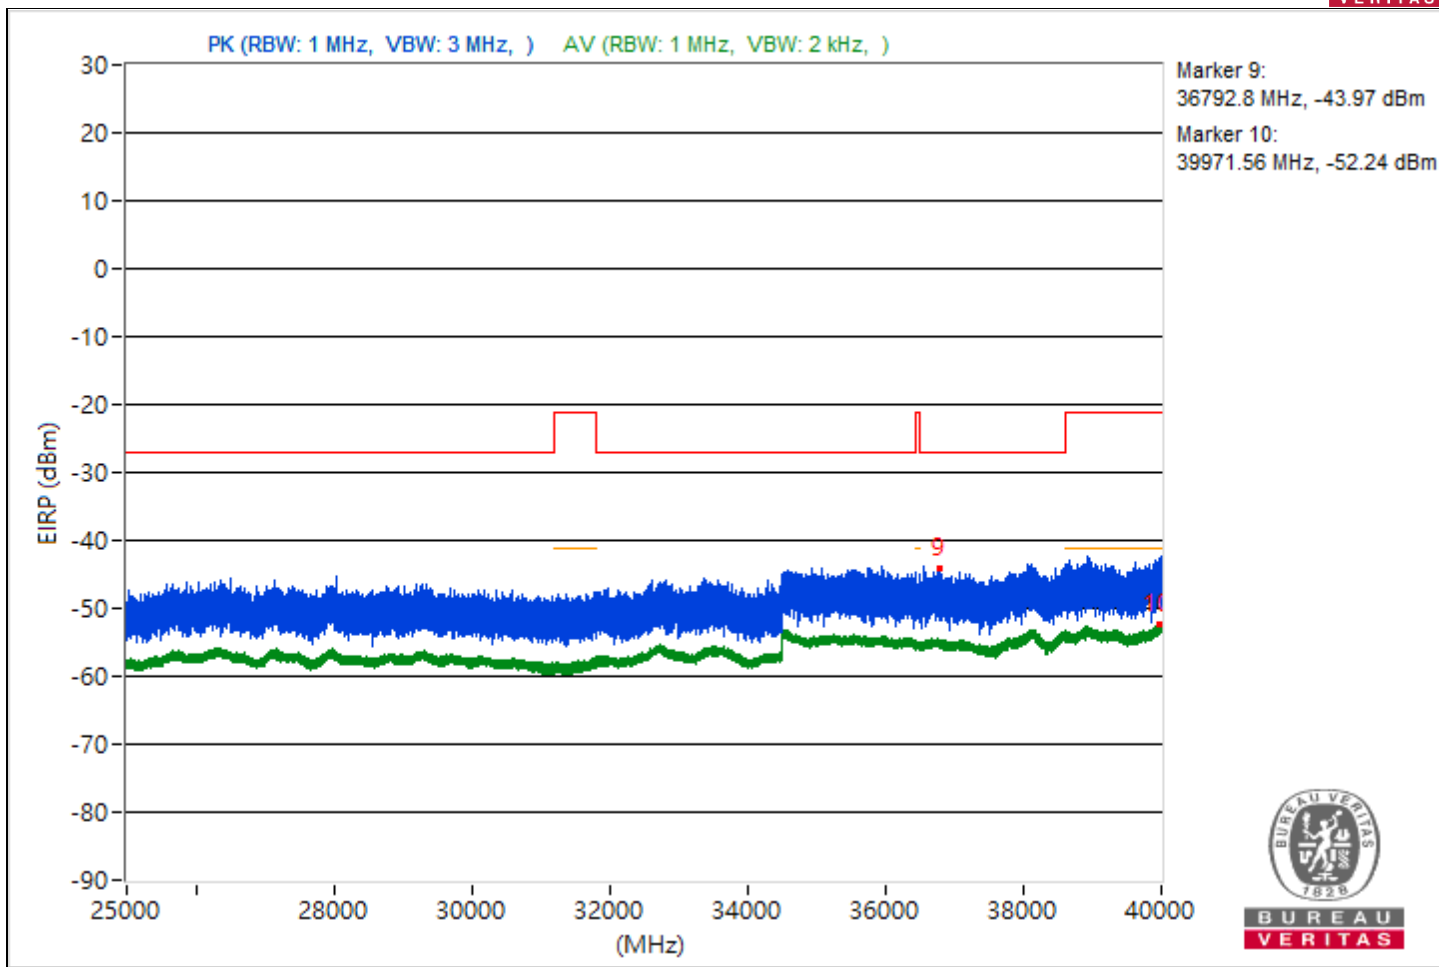





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4448.74	55.25 PK	68.26	-13.01	-46.27	-50.68	4.92	-40.01
2	5093.29	47.4 AV	54	-6.6	-55.28	-56.36	4.92	-47.86
3	#6031.29	55.1 PK	68.26	-13.16	-51.67	-46.16	4.92	-40.16
4	11043.64	44.58 AV	54	-9.42	-59.14	-58.13	4.92	-50.68
5	#14284.53	55.4 PK	68.26	-12.86	-45.89	-51.23	4.92	-39.86
6	18776.4	46.4 AV	54	-7.6	-56.29	-57.36	4.92	-48.86
7	#21595.4	58.76 PK	68.26	-9.5	-45.85	-43.37	4.92	-36.5
8	23947.8	48.88 AV	54	-5.12	-54.92	-53.77	4.92	-46.38
9	#35253.51	51.77 PK	68.26	-16.49	-49.41	-55.26	4.92	-43.49
10	39976.98	42.95 AV	54	-11.05	-60.81	-59.74	4.92	-52.31

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

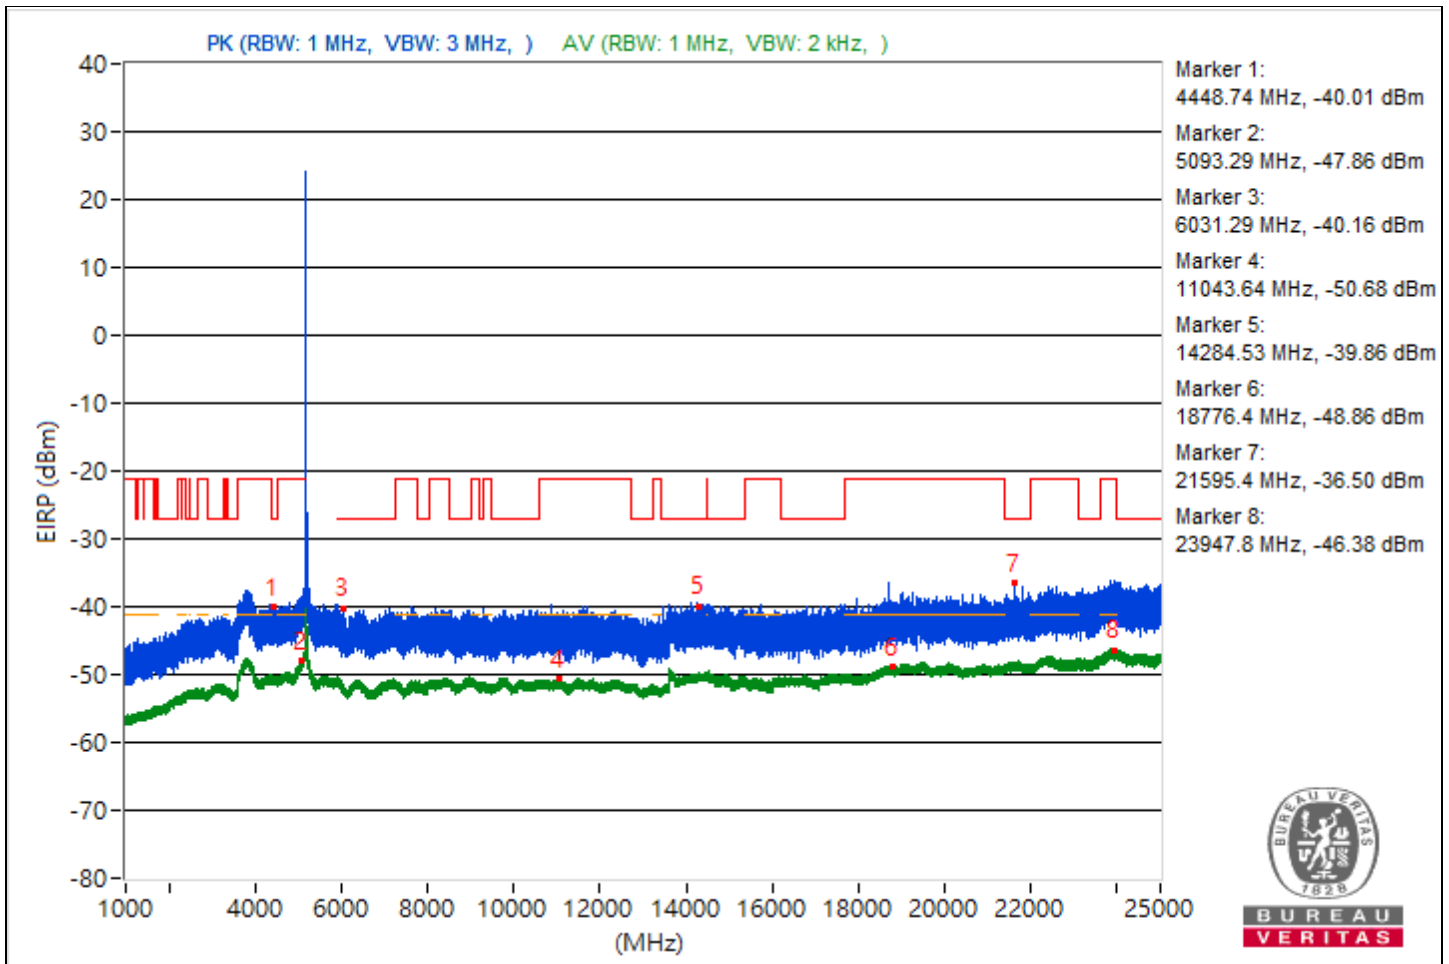

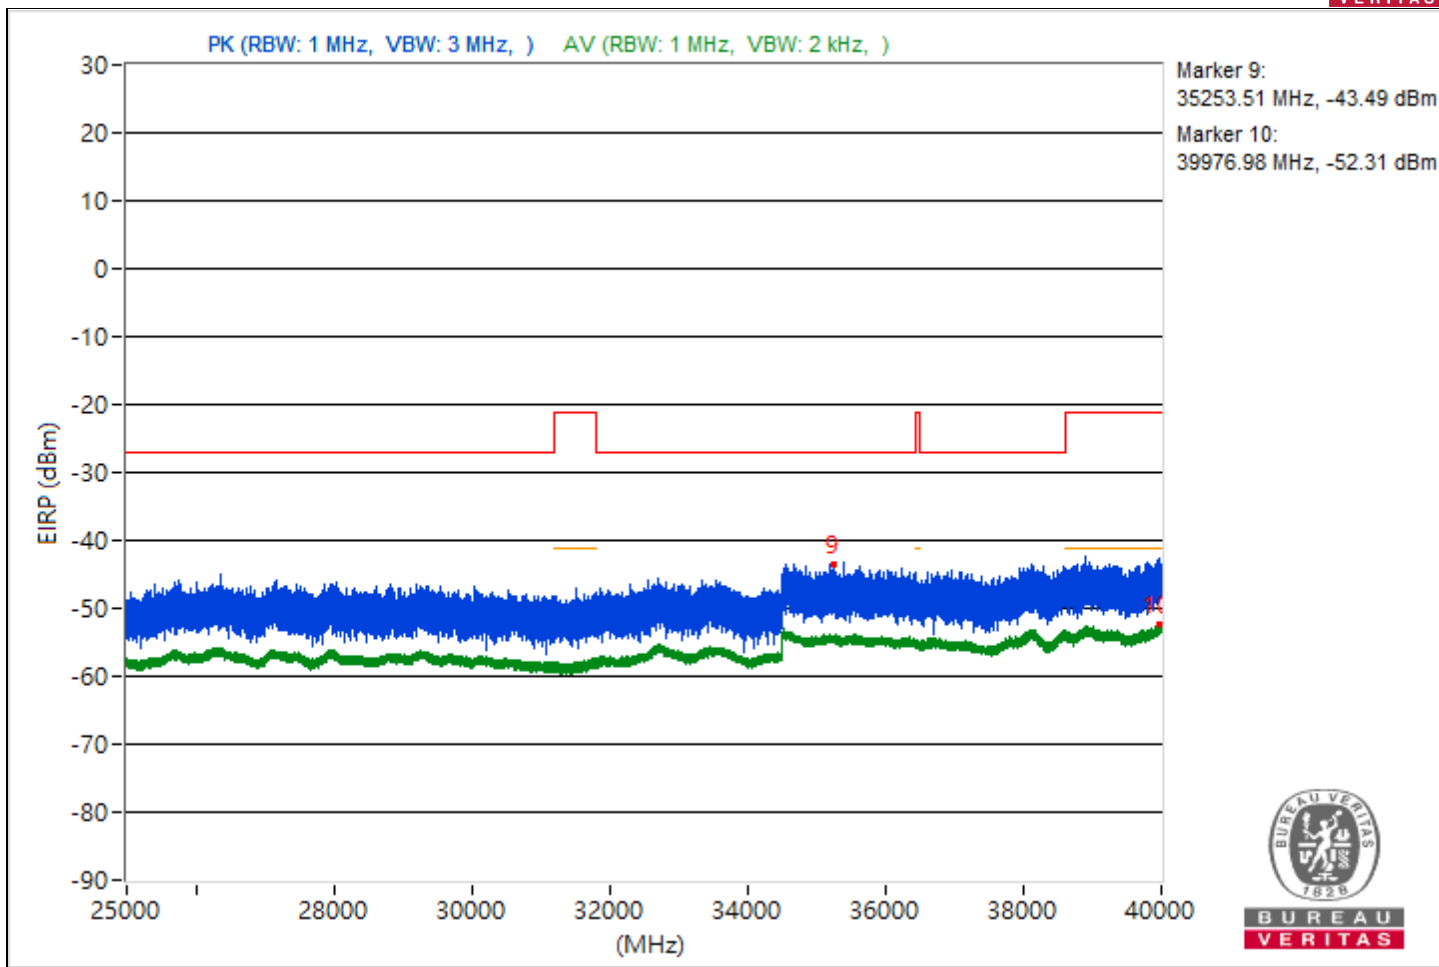



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4473.24	55.22 PK	68.26	-13.04	-46.52	-50.18	4.92	-40.04
2	3802.1	47.53 AV	54	-6.47	-56	-55.34	4.92	-47.73
3	#5907.23	55.57 PK	68.26	-12.69	-45.95	-50.37	4.92	-39.69
4	11479.02	46.23 AV	54	-7.77	-57.56	-56.43	4.92	-49.03
5	#13905.33	56.07 PK	68.26	-12.19	-51.32	-45.02	4.92	-39.19
6	18828.4	46.44 AV	54	-7.56	-56.31	-57.25	4.92	-48.82
7	#24434.3	59.27 PK	68.26	-8.99	-46.36	-42.37	4.92	-35.99
8	23805	49.11 AV	54	-4.89	-53.89	-54.28	4.92	-46.15
9	#34538.67	51.53 PK	68.26	-16.73	-50.22	-53.85	4.92	-43.73
10	39996.36	42.88 AV	54	-11.12	-59.81	-60.87	4.92	-52.38

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

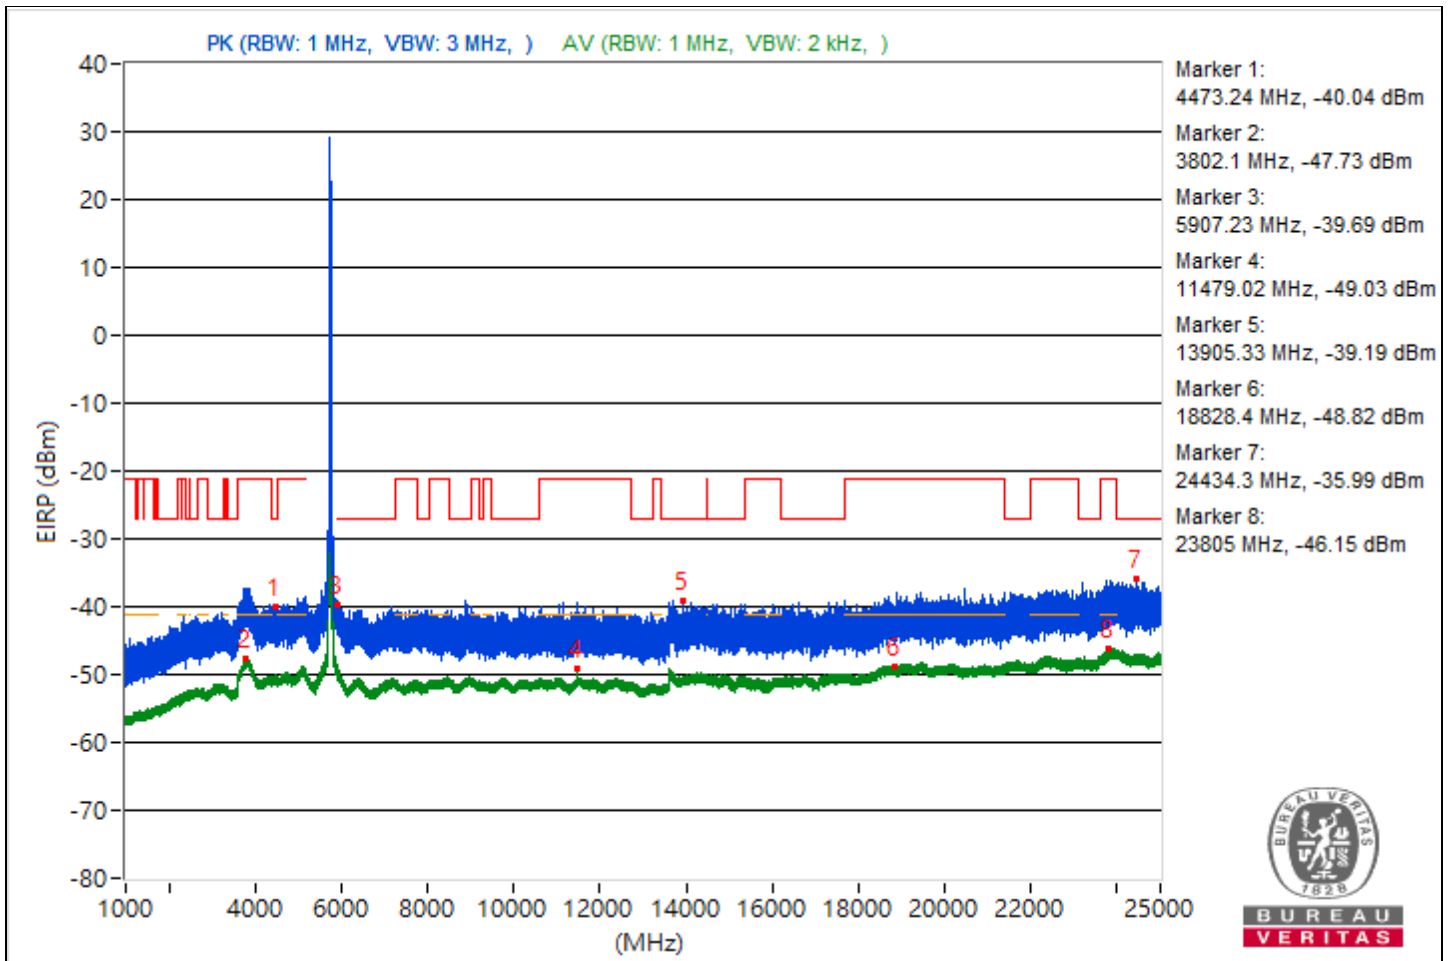

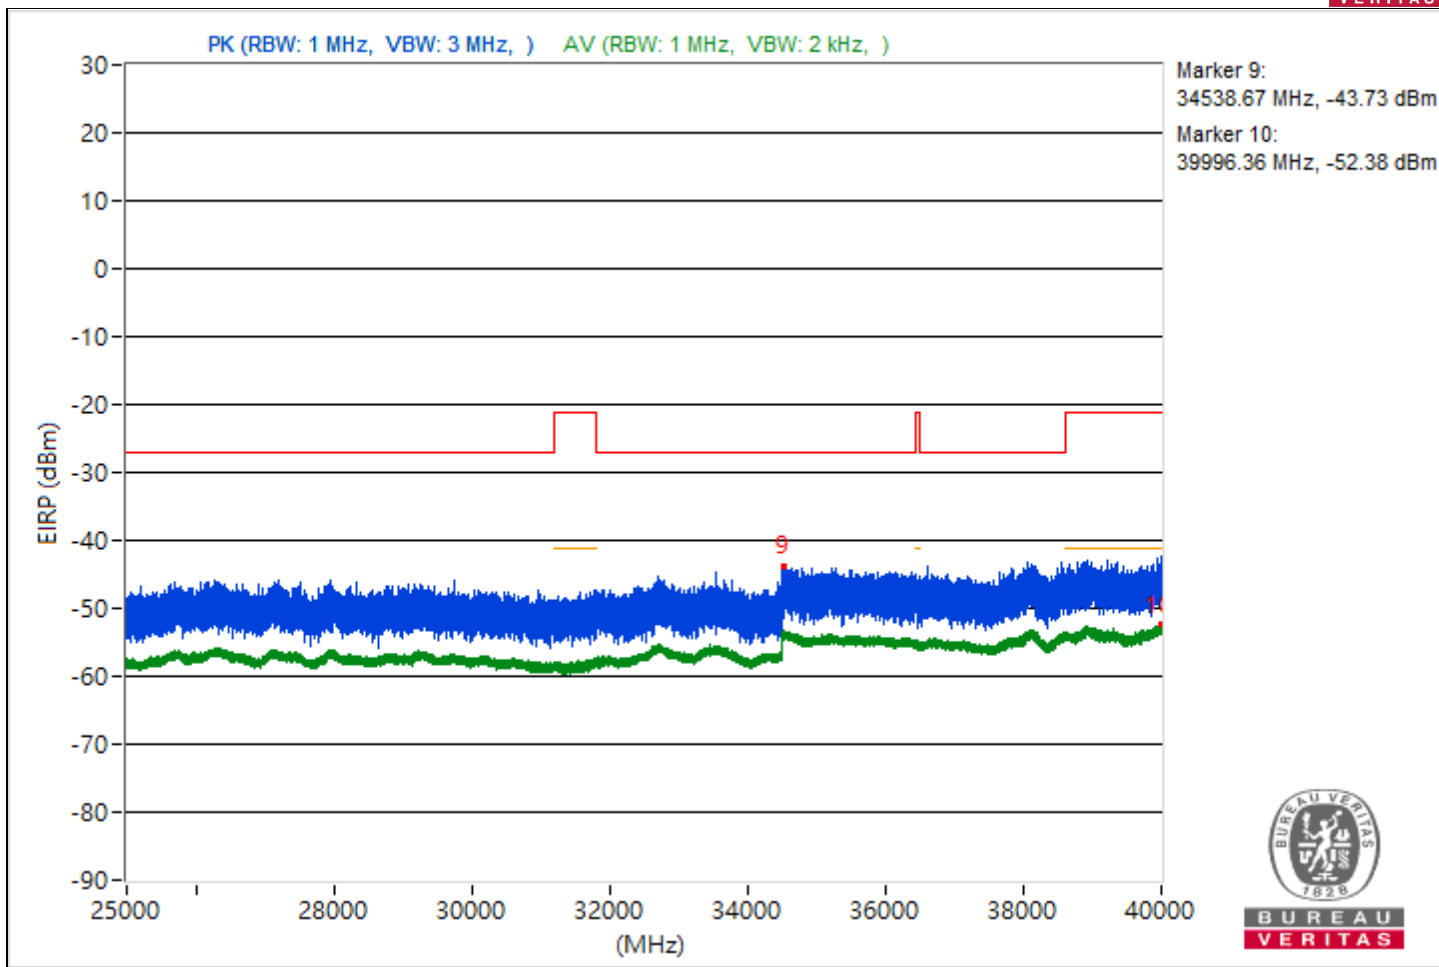





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4471.61	54.99 PK	68.26	-13.27	-49.76	-47.06	4.92	-40.27
2	3856.16	47.42 AV	54	-6.58	-55.33	-56.26	4.92	-47.84
3	#5901.09	59.54 PK	68.26	-8.72	-42.66	-44.94	4.92	-35.72
4	11661.24	46.56 AV	54	-7.44	-58.25	-55.45	4.92	-48.7
5	#14125.69	55.65 PK	68.26	-12.61	-51.22	-45.58	4.92	-39.61
6	18995.7	46.47 AV	54	-7.53	-56.18	-57.34	4.92	-48.79
7	#24985.5	58.8 PK	68.26	-9.46	-42.39	-48.19	4.92	-36.46
8	23871.2	49.37 AV	54	-4.63	-53.36	-54.33	4.92	-45.89
9	#34782.84	51.86 PK	68.26	-16.4	-49.3	-55.26	4.92	-43.4
10	39997.6	42.96 AV	54	-11.04	-60.57	-59.93	4.92	-52.3

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

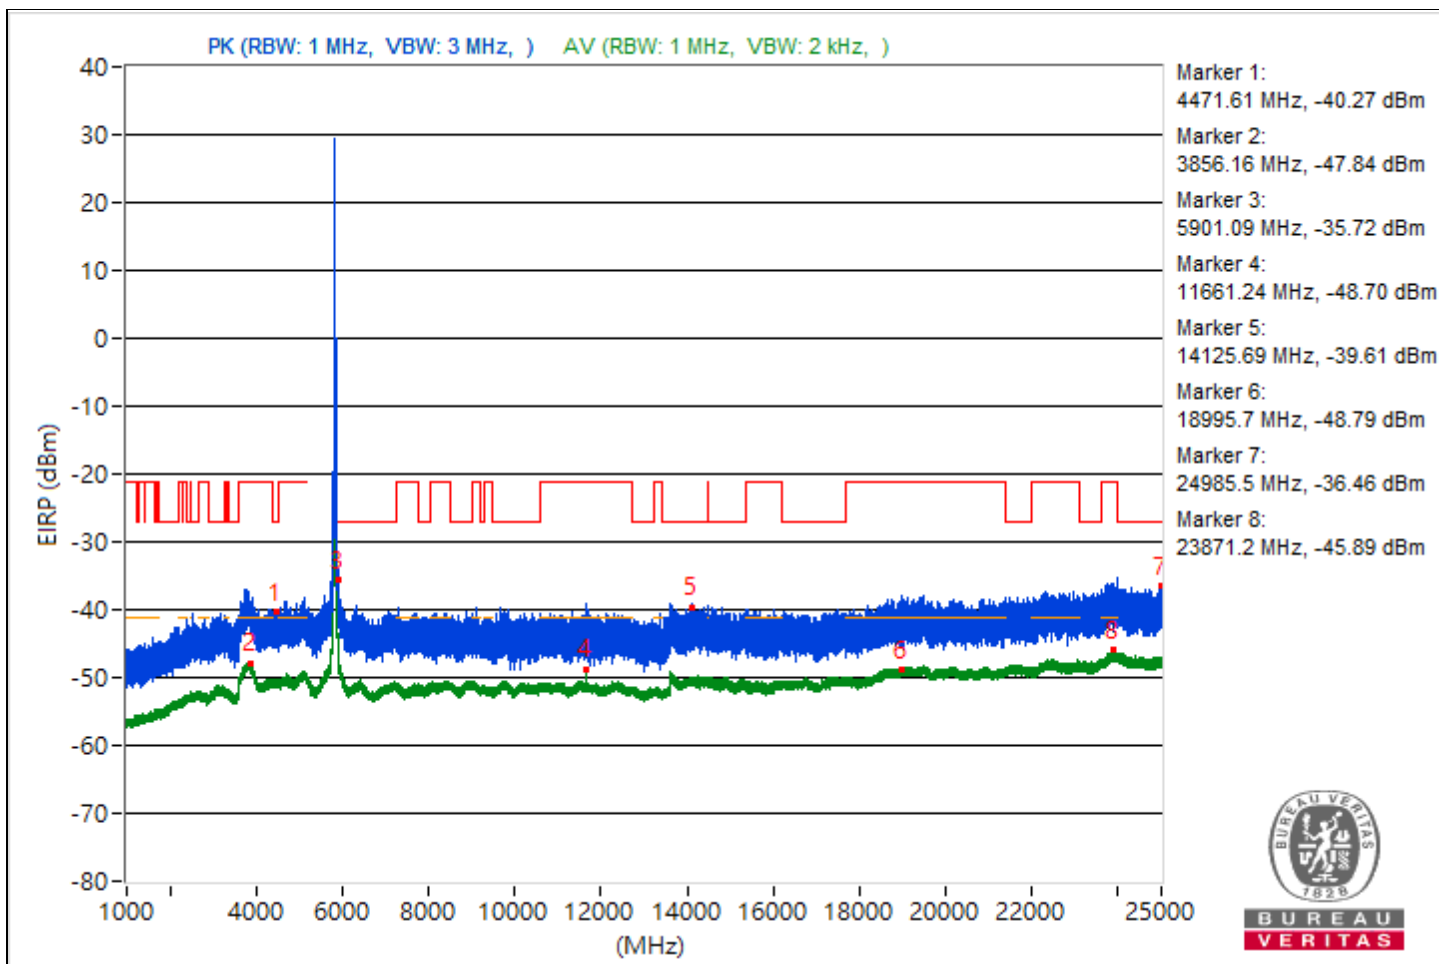

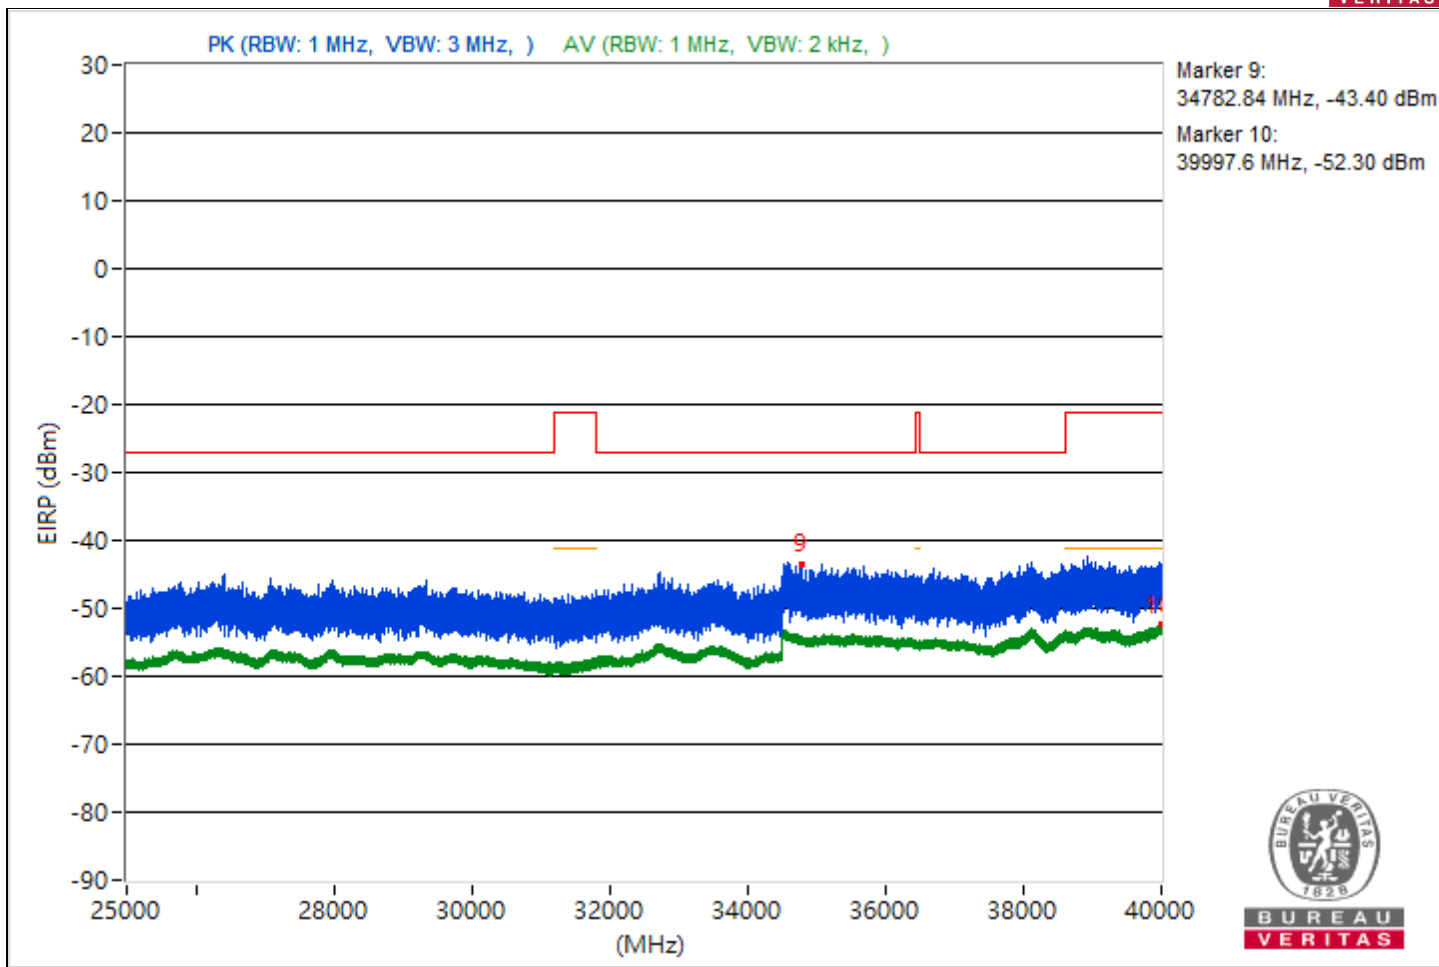





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4447.5	54.59 PK	68.26	-13.67	-51.45	-46.9	4.92	-40.67
2	3838.42	47.62 AV	54	-6.38	-55.98	-55.19	4.92	-47.64
3	#9703.91	55.08 PK	68.26	-13.18	-51.46	-46.24	4.92	-40.18
4	12397.07	44.57 AV	54	-9.43	-57.99	-59.35	4.92	-50.69
5	#14333.96	56.42 PK	68.26	-11.84	-49.04	-45.29	4.92	-38.84
6	18996.7	46.48 AV	54	-7.52	-56.22	-57.25	4.92	-48.78
7	#24136.7	58.97 PK	68.26	-9.29	-48.26	-42.16	4.92	-36.29
8	23877.8	48.96 AV	54	-5.04	-53.69	-54.85	4.92	-46.3
9	#38062.76	52.54 PK	68.26	-15.72	-49.39	-52.43	4.92	-42.72
10	39978.67	42.79 AV	54	-11.21	-60.89	-59.96	4.92	-52.47

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

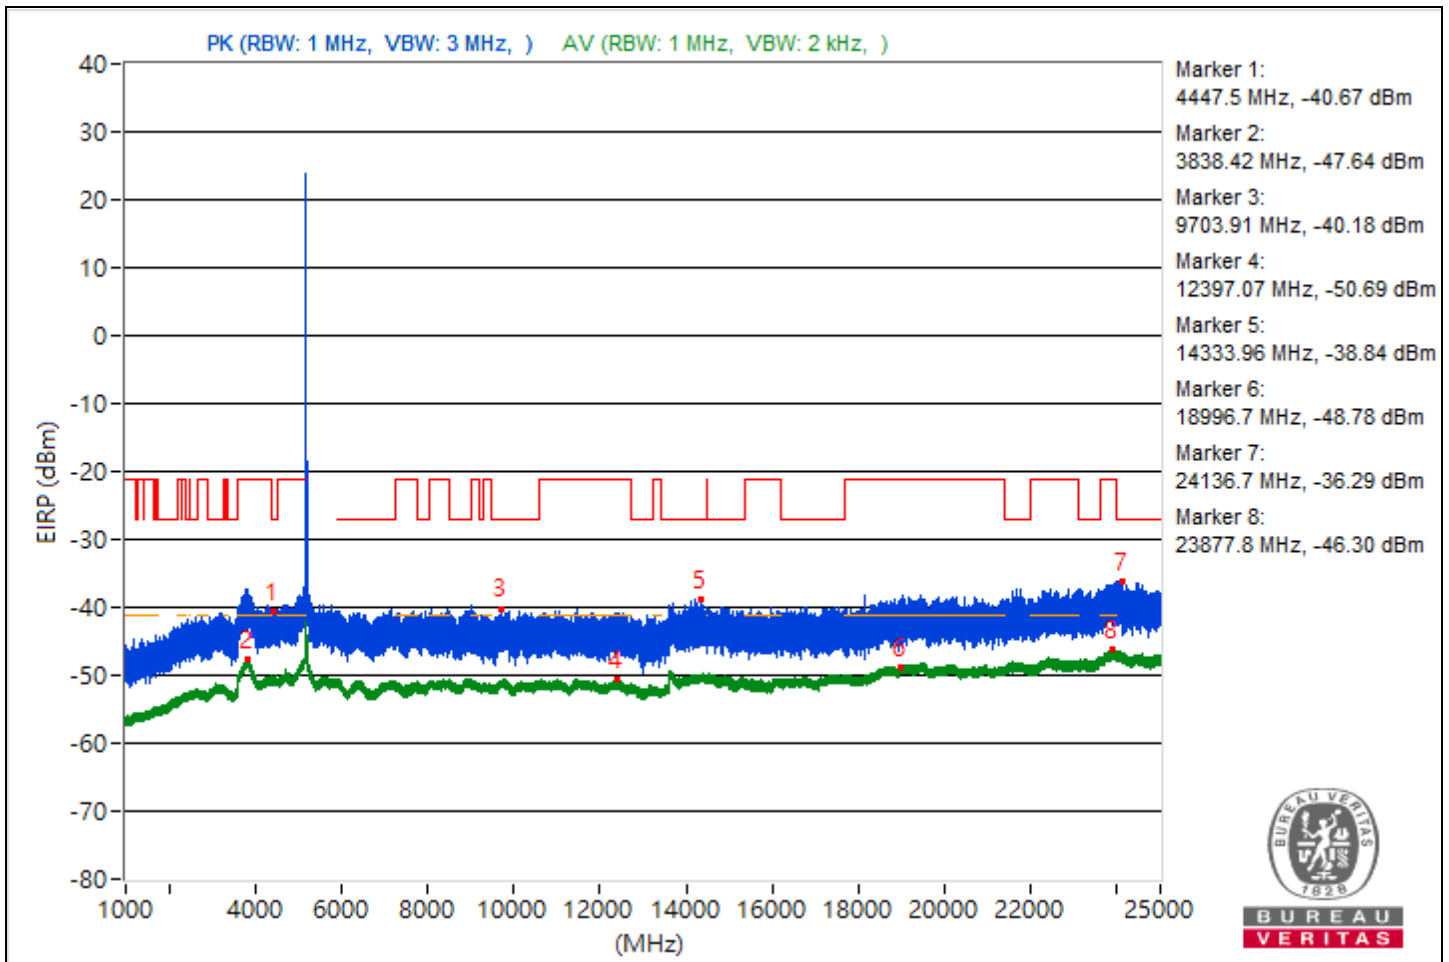

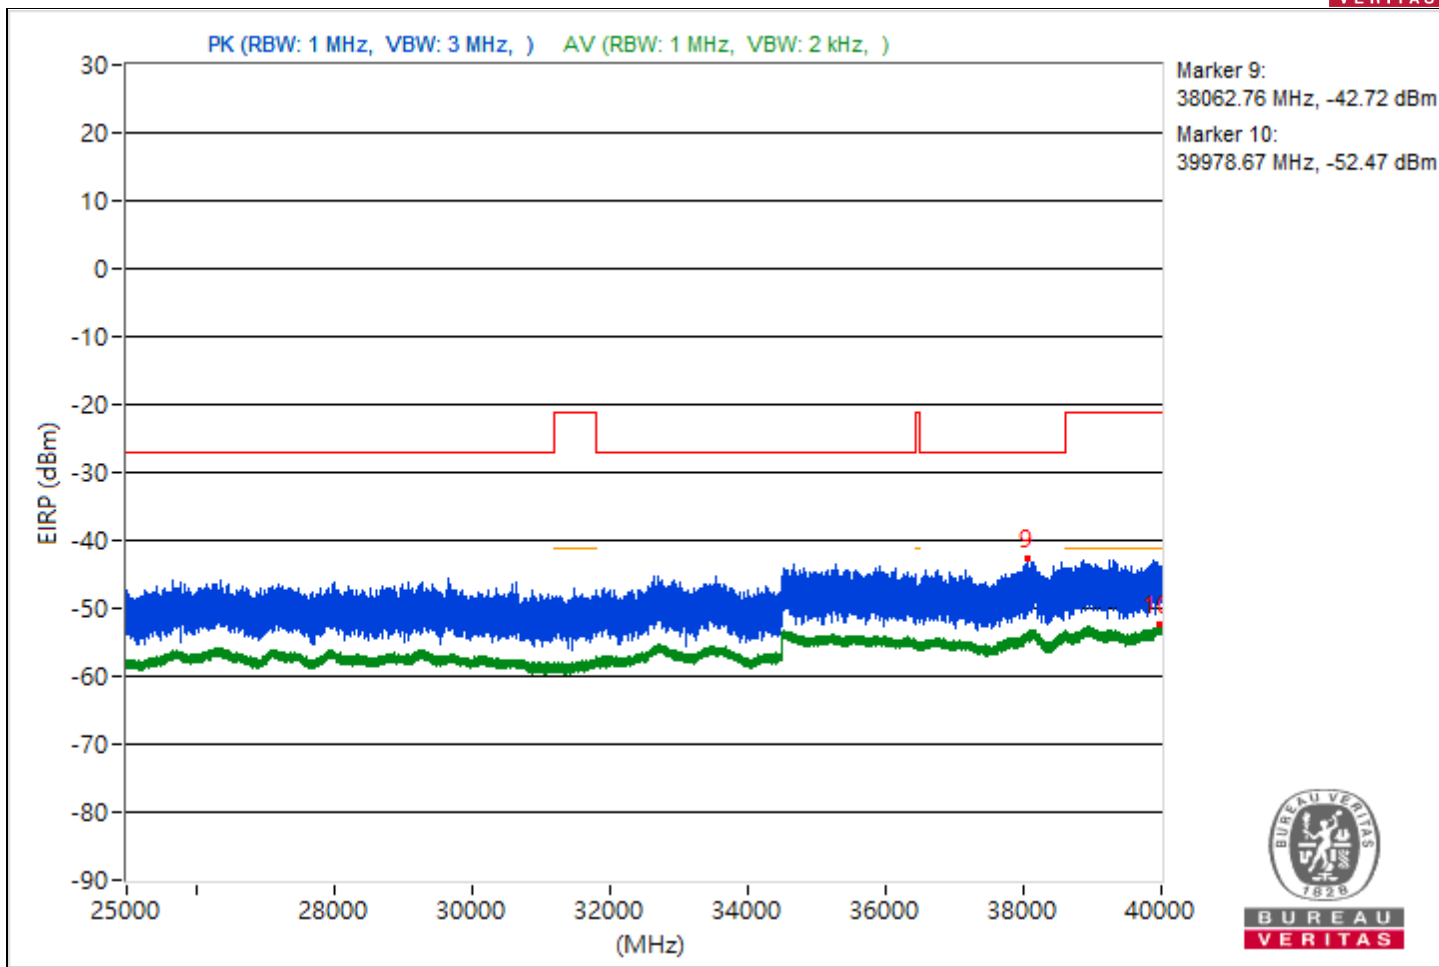



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3145.5	55.27 PK	68.26	-12.99	-51.56	-45.97	4.92	-39.99
2	3840.91	47.53 AV	54	-6.47	-56.07	-55.28	4.92	-47.73
3	#5915.87	56.17 PK	68.26	-12.09	-45.59	-49.18	4.92	-39.09
4	11481.78	47.19 AV	54	-6.81	-56.66	-55.43	4.92	-48.07
5	#17694.9	55.83 PK	68.26	-12.43	-45.54	-50.57	4.92	-39.43
6	18994.4	46.56 AV	54	-7.44	-56.07	-57.29	4.92	-48.7
7	#24971.6	59.14 PK	68.26	-9.12	-45.89	-42.75	4.92	-36.12
8	23907.9	49.06 AV	54	-4.94	-54.41	-53.88	4.92	-46.2
9	#38131.82	52 PK	68.26	-16.26	-54.41	-49.37	4.92	-43.26
10	39995.11	42.84 AV	54	-11.16	-59.84	-60.94	4.92	-52.42

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

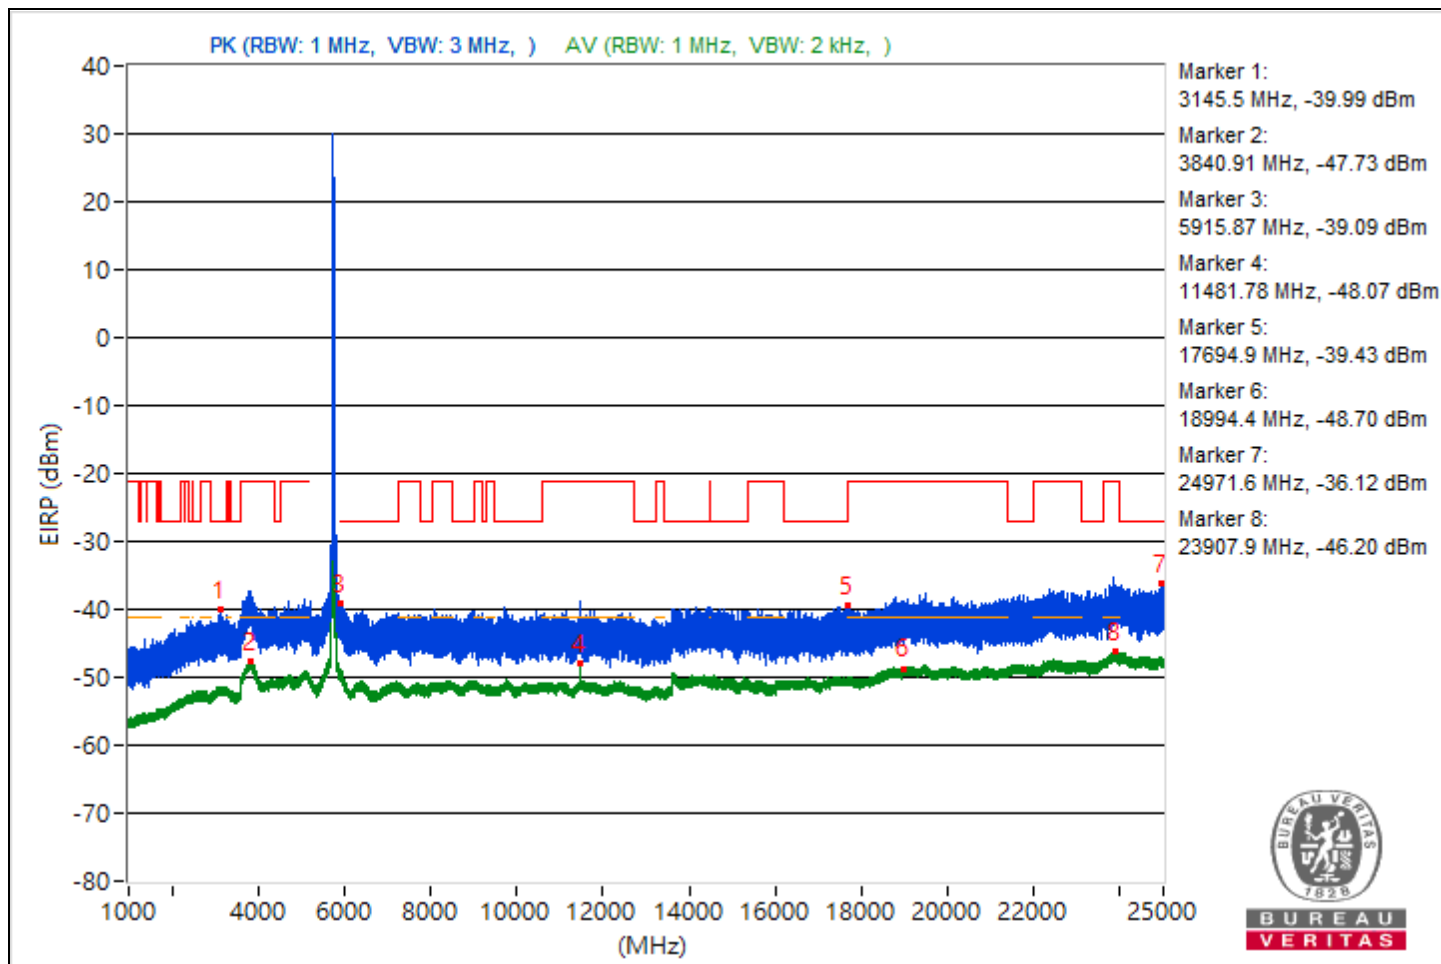

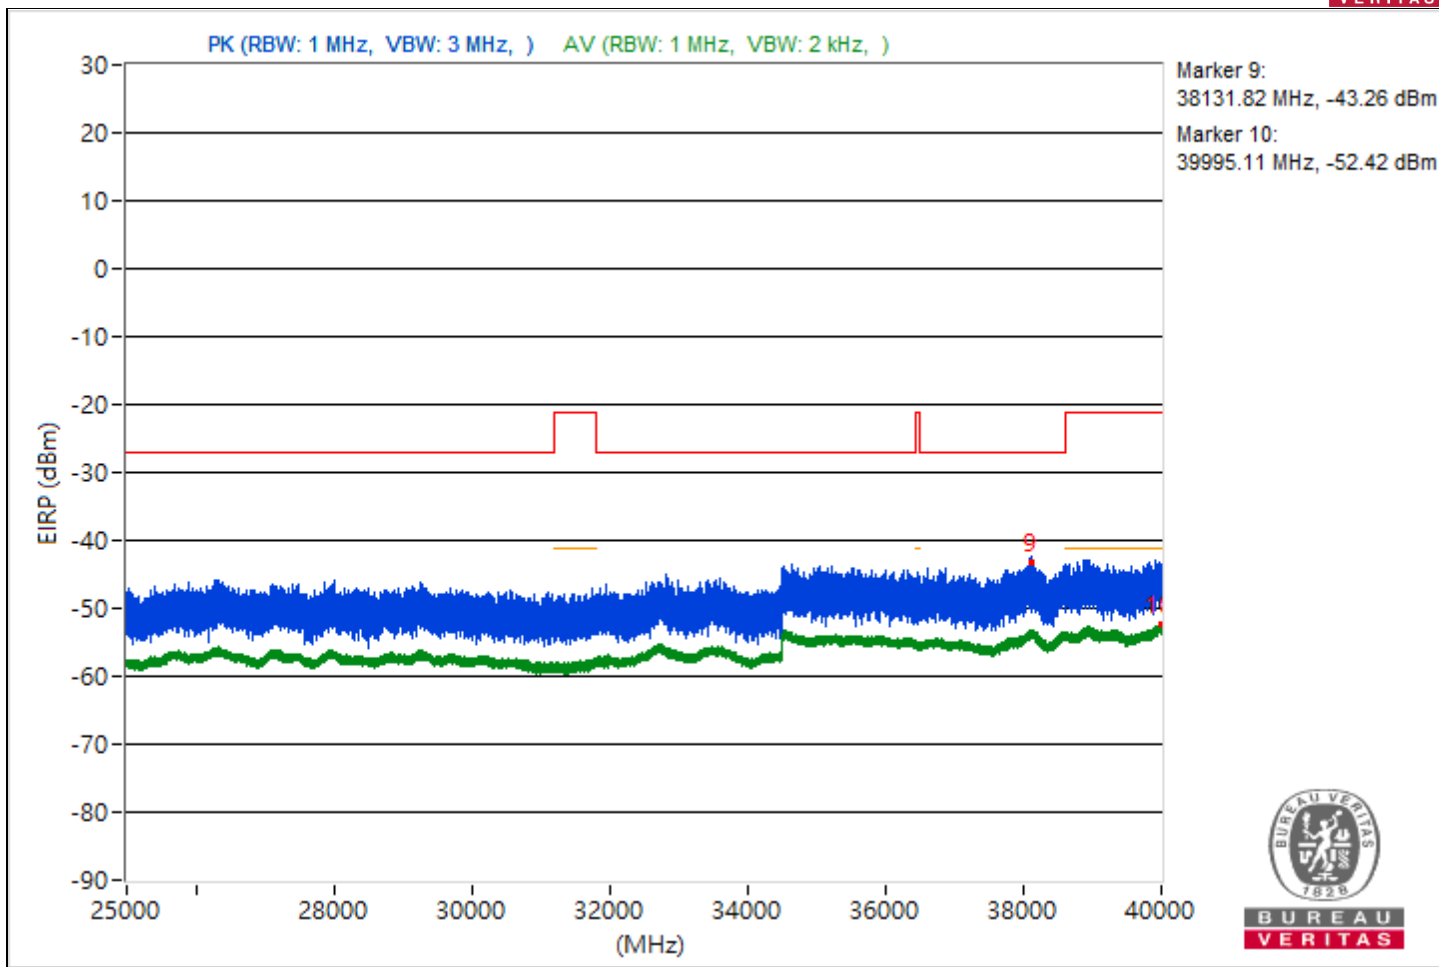



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3043.77	54.59 PK	68.26	-13.67	-46.89	-51.46	4.92	-40.67
2	3835.31	47.44 AV	54	-6.56	-56.22	-55.32	4.92	-47.82
3	#5916.18	58.77 PK	68.26	-9.49	-42.43	-48.2	4.92	-36.49
4	11659.82	47.17 AV	54	-6.83	-57.84	-54.74	4.92	-48.09
5	#16262.5	56.09 PK	68.26	-12.17	-45.1	-50.92	4.92	-39.17
6	18809.6	46.54 AV	54	-7.46	-57.21	-56.15	4.92	-48.72
7	#24282.1	58.37 PK	68.26	-9.89	-47.87	-43.04	4.92	-36.89
8	23903.6	49.18 AV	54	-4.82	-54.25	-53.78	4.92	-46.08
9	#38592	51.78 PK	68.26	-16.48	-54.54	-49.61	4.92	-43.48
10	39998.13	42.69 AV	54	-11.31	-60.96	-60.08	4.92	-52.57

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

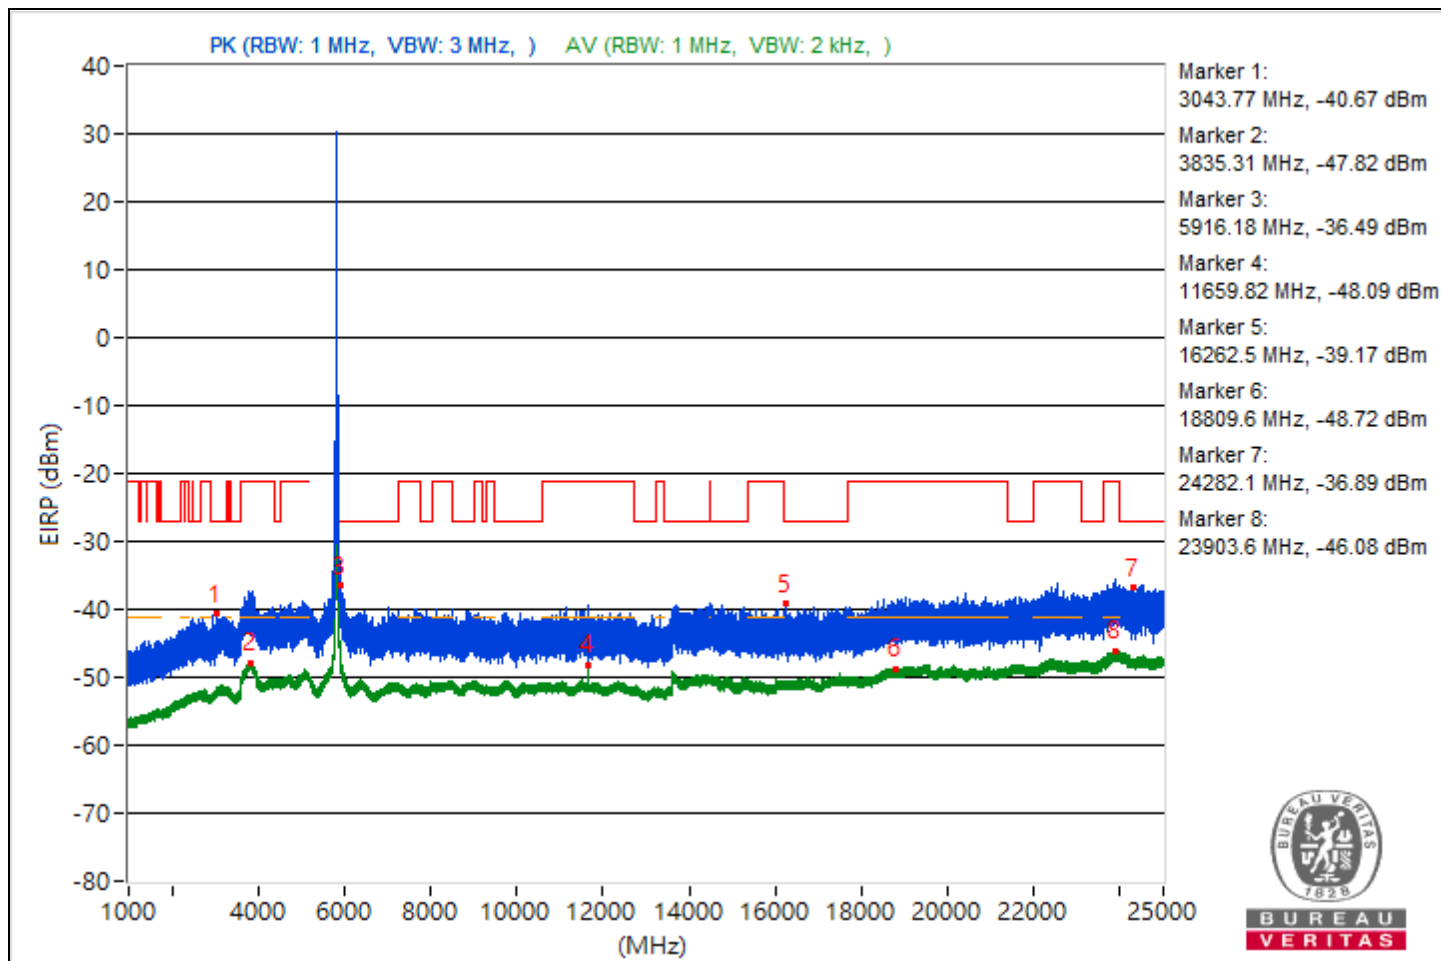

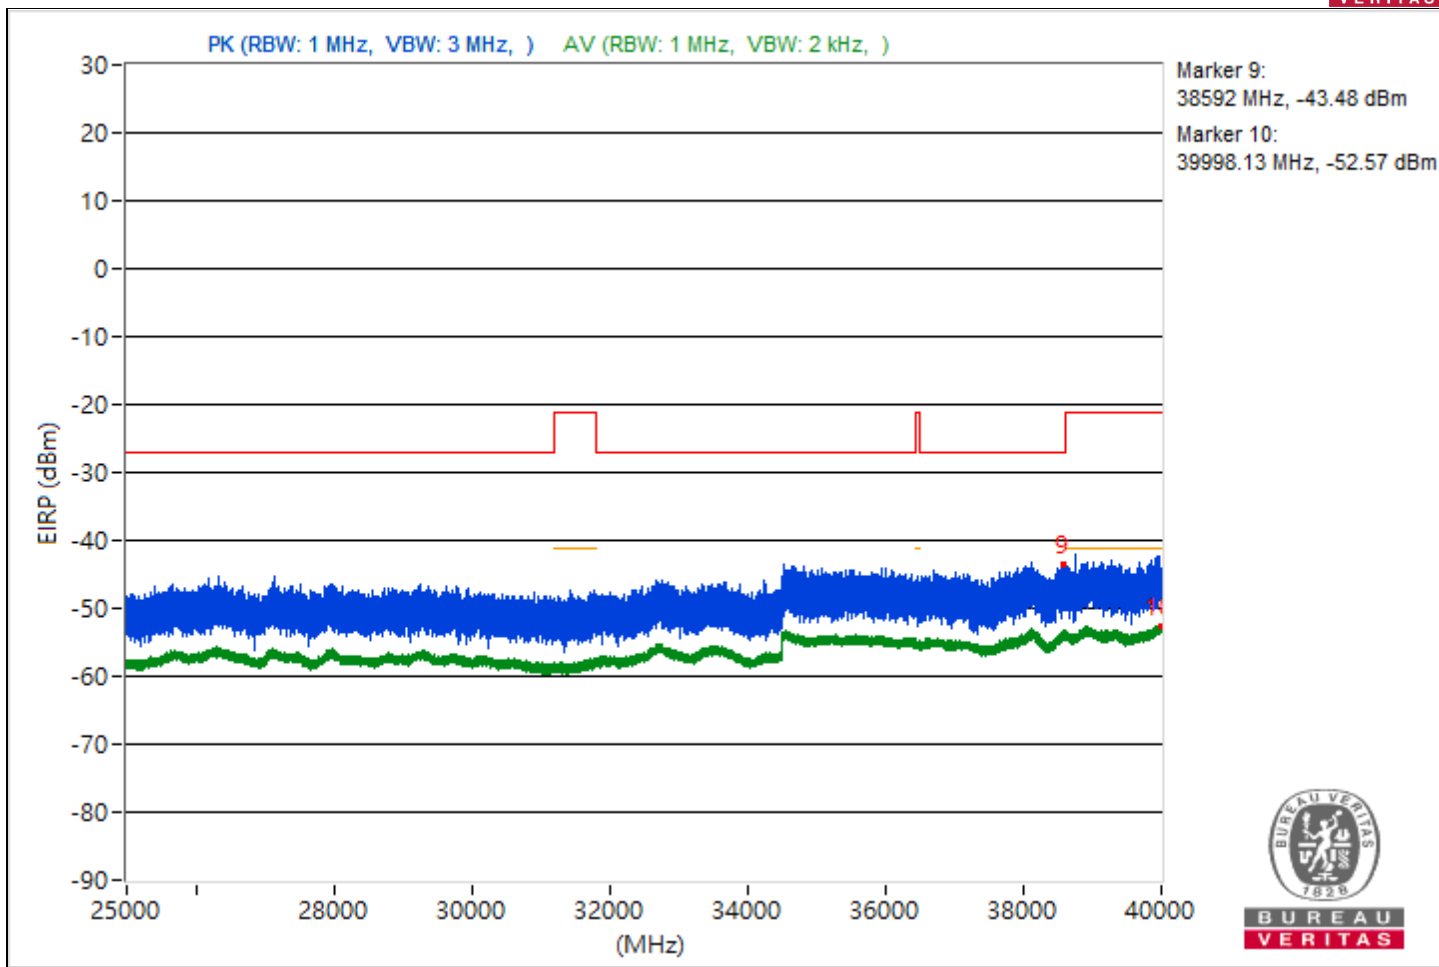







RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4436.84	55.02 PK	68.26	-13.24	-49.83	-46.97	4.92	-40.24
2	3842	47.65 AV	54	-6.35	-55.23	-55.86	4.92	-47.61
3	#5907.23	55.38 PK	68.26	-12.88	-50.72	-46.09	4.92	-39.88
4	8288.27	44.62 AV	54	-9.38	-57.88	-59.4	4.92	-50.64
5	#14387.82	55.82 PK	68.26	-12.44	-45.54	-50.59	4.92	-39.44
6	18801.2	46.56 AV	54	-7.44	-56.15	-57.18	4.92	-48.7
7	#24006.8	58.85 PK	68.26	-9.41	-42.64	-47.18	4.92	-36.41
8	23847.1	49.04 AV	54	-4.96	-53.68	-54.67	4.92	-46.22
9	#36373.42	51.95 PK	68.26	-16.31	-49.53	-54.1	4.92	-43.31
10	39981.51	42.85 AV	54	-11.15	-60.67	-60.02	4.92	-52.41

Notes:

- Margin value = Emission Level - Limit value
- "# ": The radiated frequency is out of the restricted band.

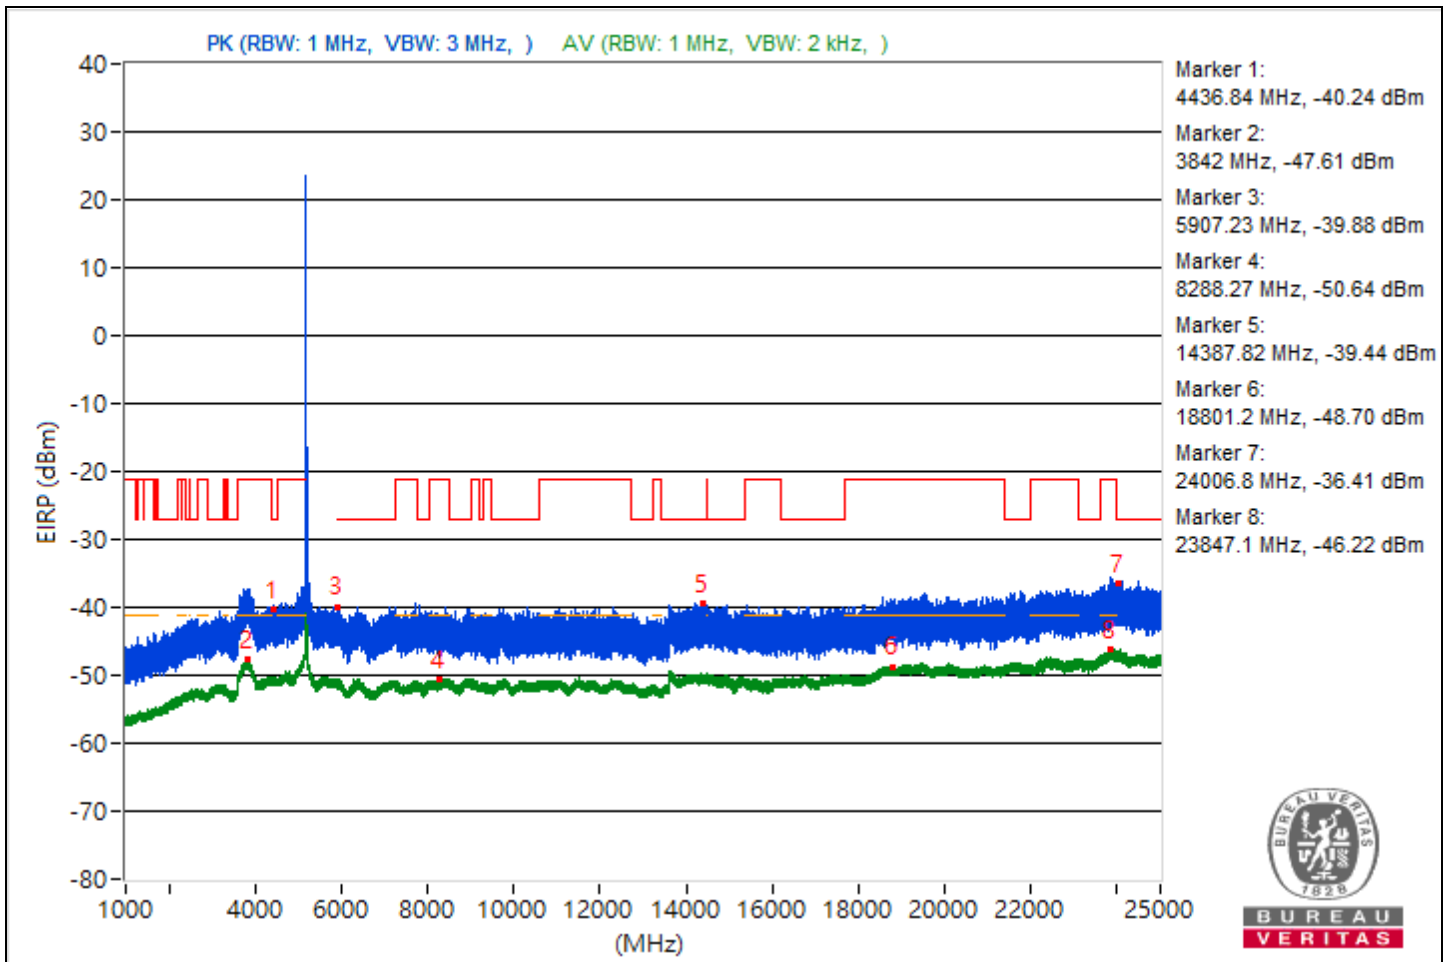

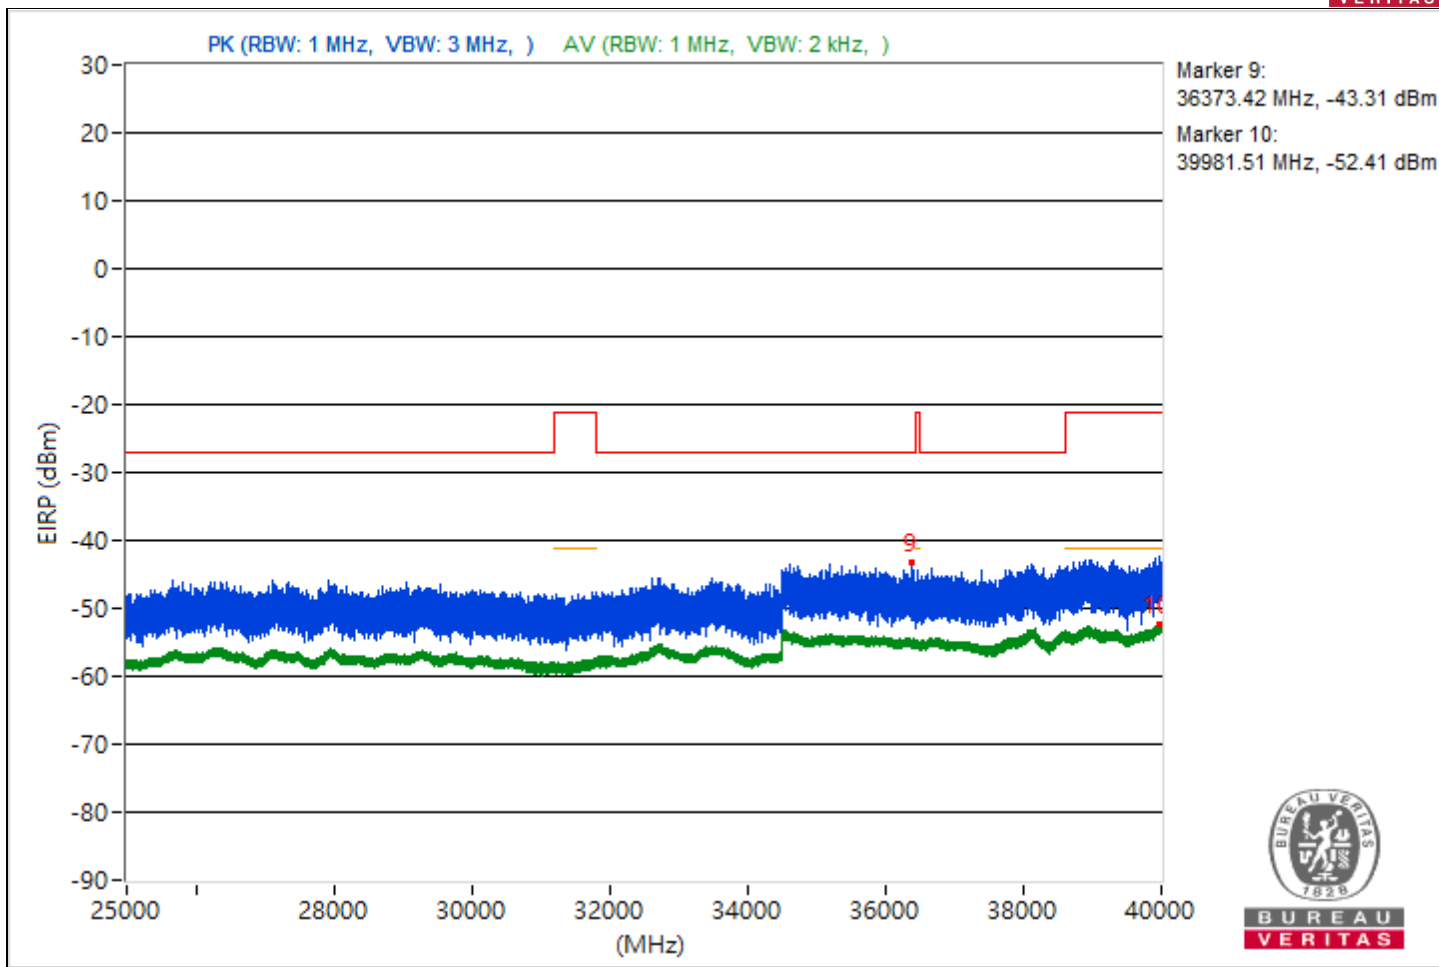





RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3146.67	55.07 PK	68.26	-13.19	-46.4	-50.99	4.92	-40.19
2	3835.62	47.64 AV	54	-6.36	-55.32	-55.78	4.92	-47.62
3	#10318.22	56 PK	68.26	-12.26	-45.76	-49.33	4.92	-39.26
4	11482.58	46.1 AV	54	-7.9	-57.73	-56.54	4.92	-49.16
5	#14812.09	56.2 PK	68.26	-12.06	-44.98	-50.87	4.92	-39.06
6	18997.4	46.71 AV	54	-7.29	-56.93	-56.07	4.92	-48.55
7	#24371.1	58.36 PK	68.26	-9.9	-43.35	-47.09	4.92	-36.9
8	23853.4	48.88 AV	54	-5.12	-53.68	-55.03	4.92	-46.38
9	#34542.67	53.18 PK	68.26	-15.08	-47.74	-55.05	4.92	-42.08
10	39990.67	43.04 AV	54	-10.96	-59.72	-60.63	4.92	-52.22

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

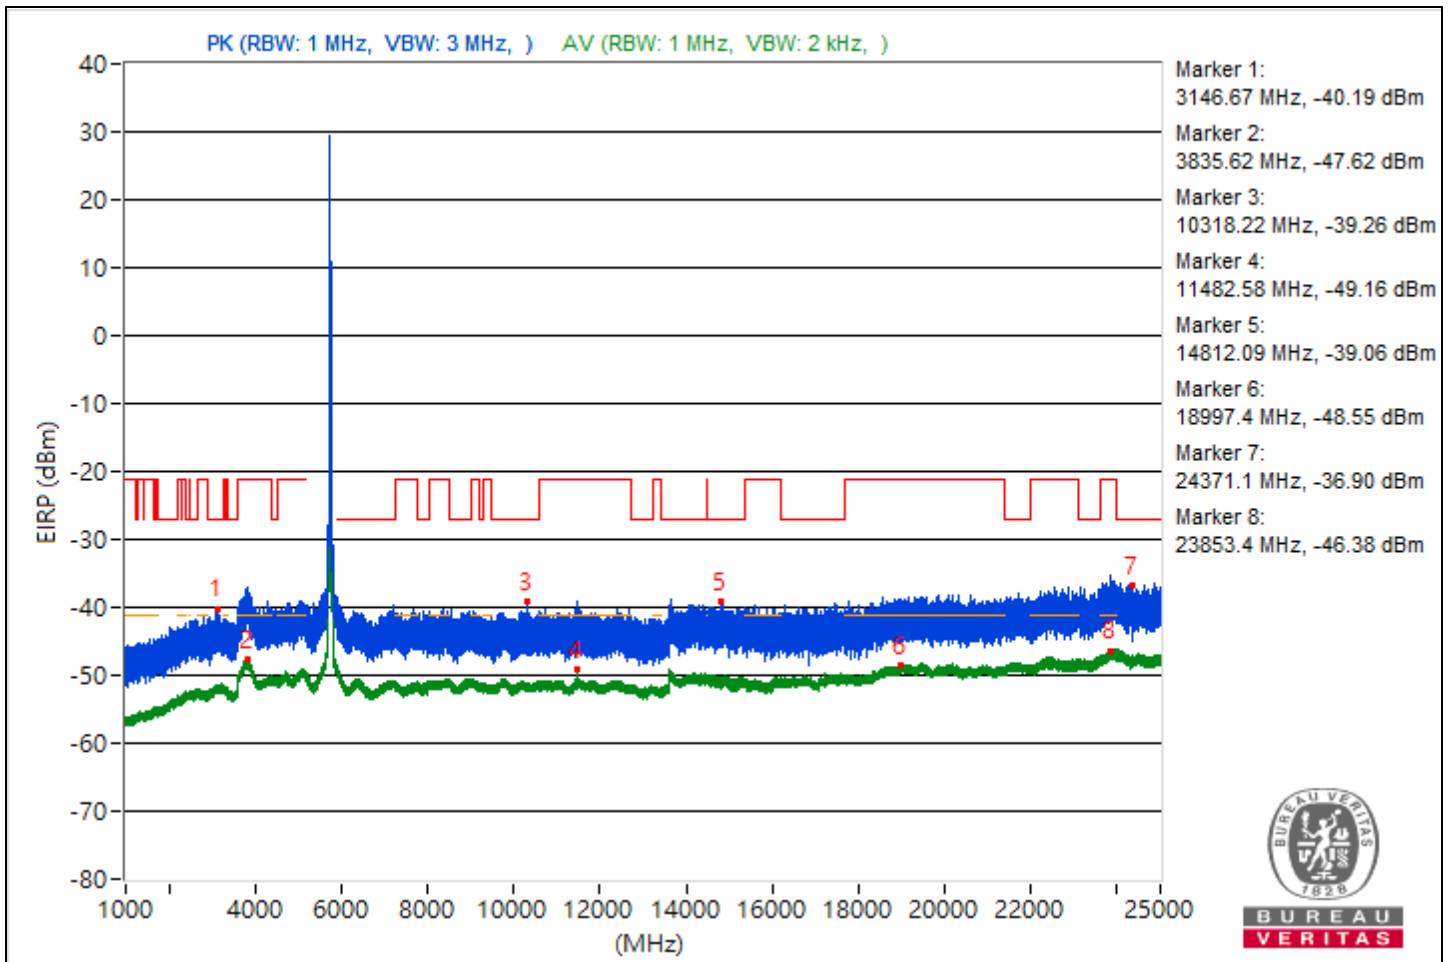

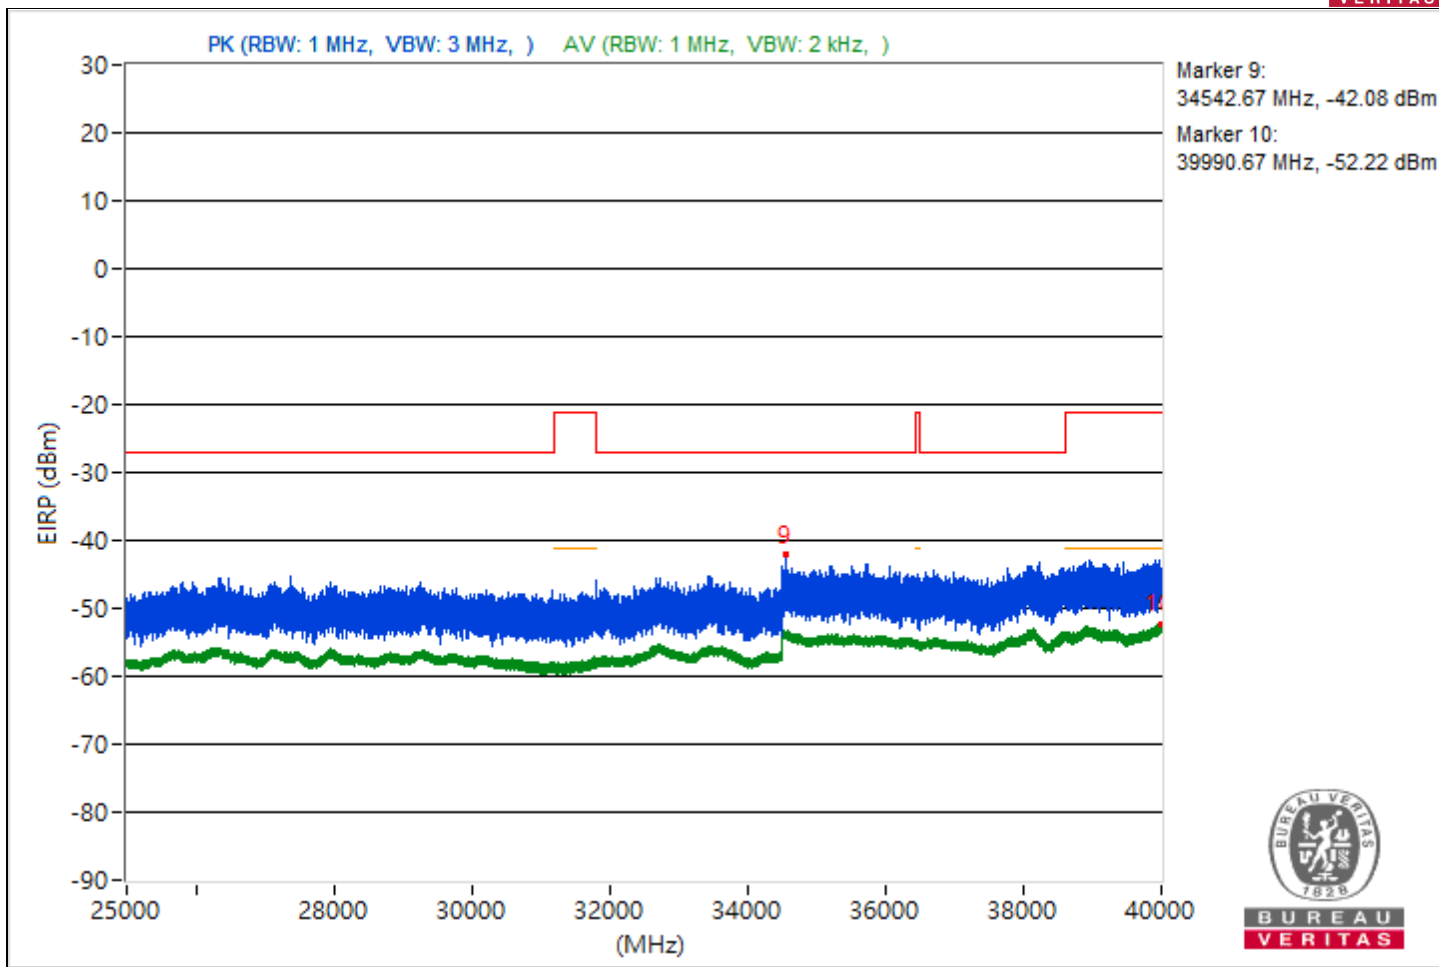



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4433.42	55.46 PK	68.26	-12.8	-45.88	-51.01	4.92	-39.8
2	3810.73	47.65 AV	54	-6.35	-56.17	-54.98	4.92	-47.61
3	#5901.09	58.34 PK	68.26	-9.92	-47.17	-43.35	4.92	-36.92
4	11655.91	45.8 AV	54	-8.2	-58.33	-56.62	4.92	-49.46
5	#15213.69	55.7 PK	68.26	-12.56	-52.66	-45.19	4.92	-39.56
6	18770.1	46.71 AV	54	-7.29	-56.8	-56.18	4.92	-48.55
7	#24112.8	58.21 PK	68.26	-10.05	-42.95	-48.96	4.92	-37.05
8	23894.6	49.23 AV	54	-4.77	-54.48	-53.5	4.92	-46.03
9	#38574.67	51.67 PK	68.26	-16.59	-54.41	-49.81	4.92	-43.59
10	39997.51	42.99 AV	54	-11.01	-60.01	-60.41	4.92	-52.27

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

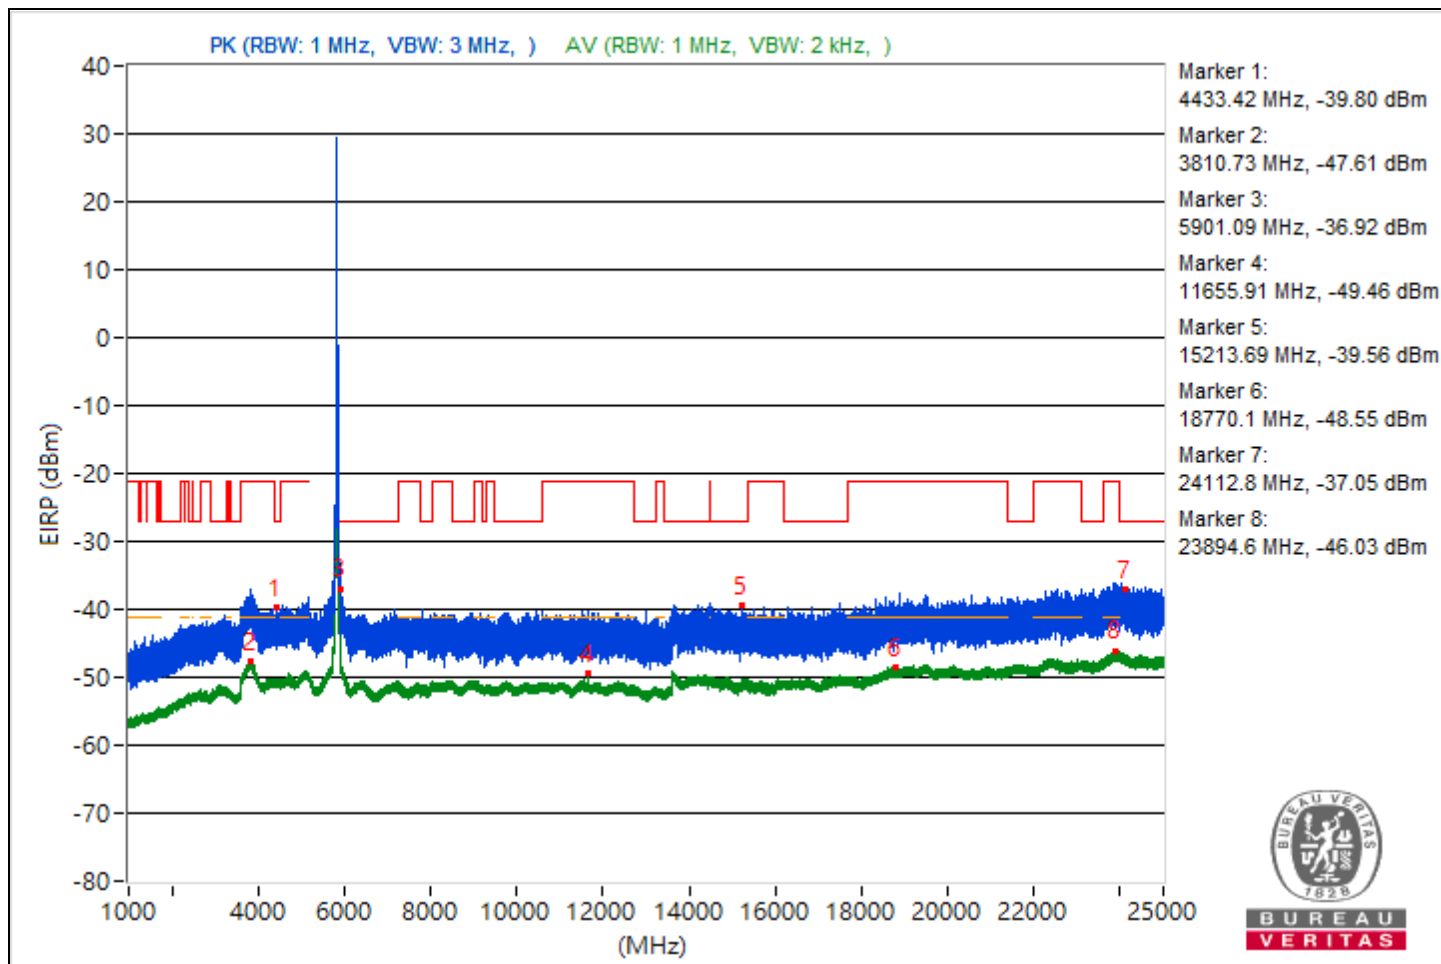

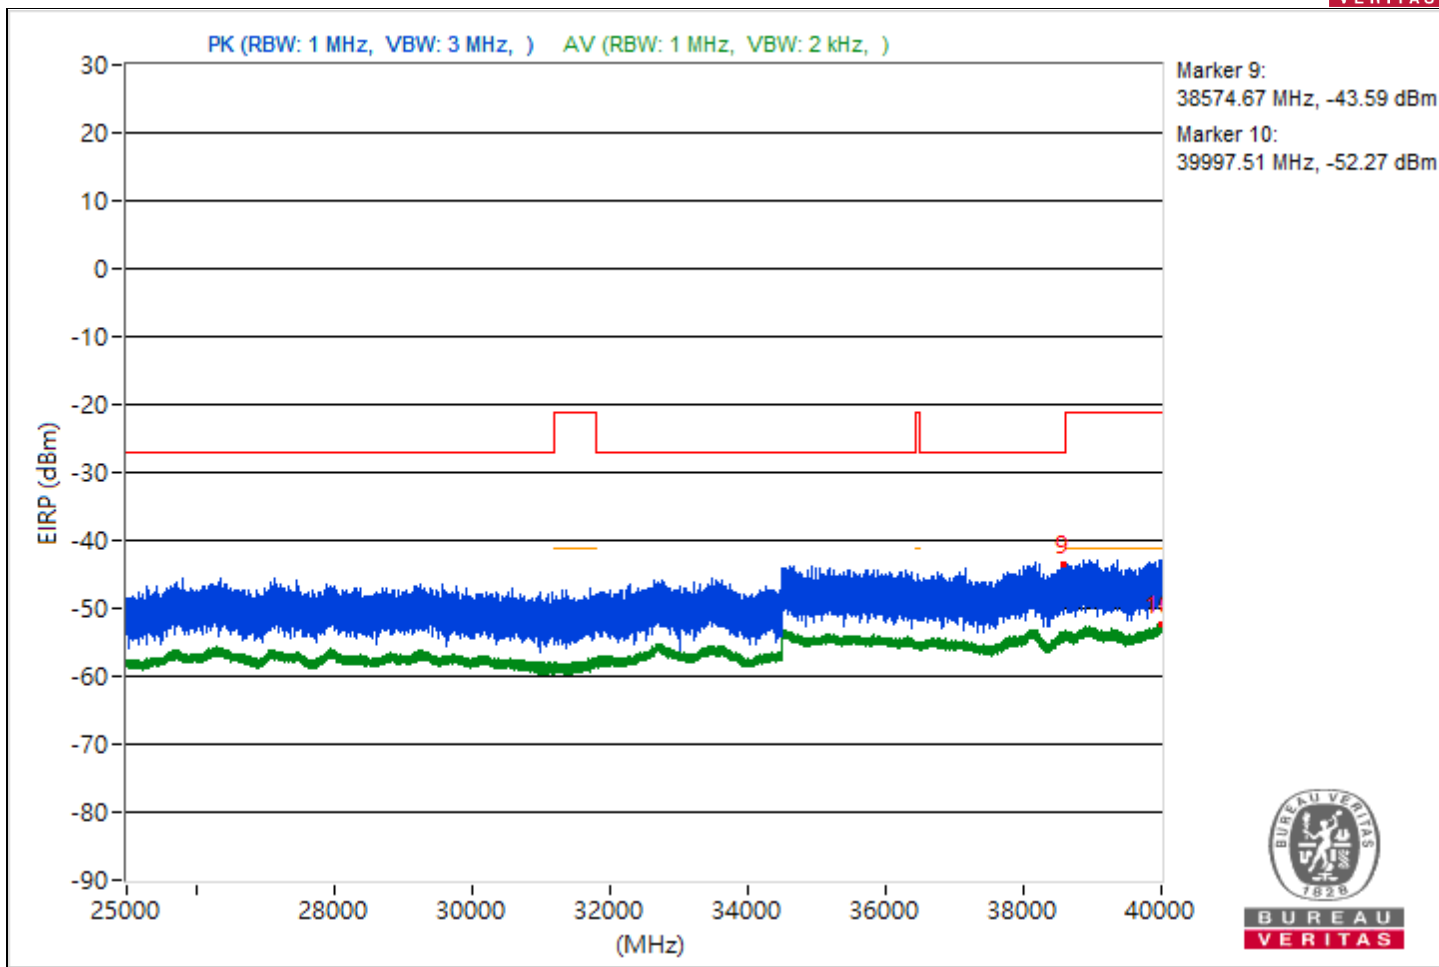





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4451.31	54.79 PK	68.26	-13.47	-50.92	-46.82	4.92	-40.47
2	3833.06	47.57 AV	54	-6.43	-55.28	-56	4.92	-47.69
3	#7140.56	55.26 PK	68.26	-13	-46.36	-50.42	4.92	-40
4	8405.16	44.8 AV	54	-9.2	-57.91	-58.93	4.92	-50.46
5	#13679.02	56.73 PK	68.26	-11.53	-47.53	-45.59	4.92	-38.53
6	18882.8	46.67 AV	54	-7.33	-56.88	-56.19	4.92	-48.59
7	#24088.5	58.77 PK	68.26	-9.49	-43.1	-46.31	4.92	-36.49
8	23857.7	48.83 AV	54	-5.17	-53.81	-55	4.92	-46.43
9	#35510.67	51.5 PK	68.26	-16.76	-55.14	-49.79	4.92	-43.76
10	39994.84	42.88 AV	54	-11.12	-60.01	-60.64	4.92	-52.38

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

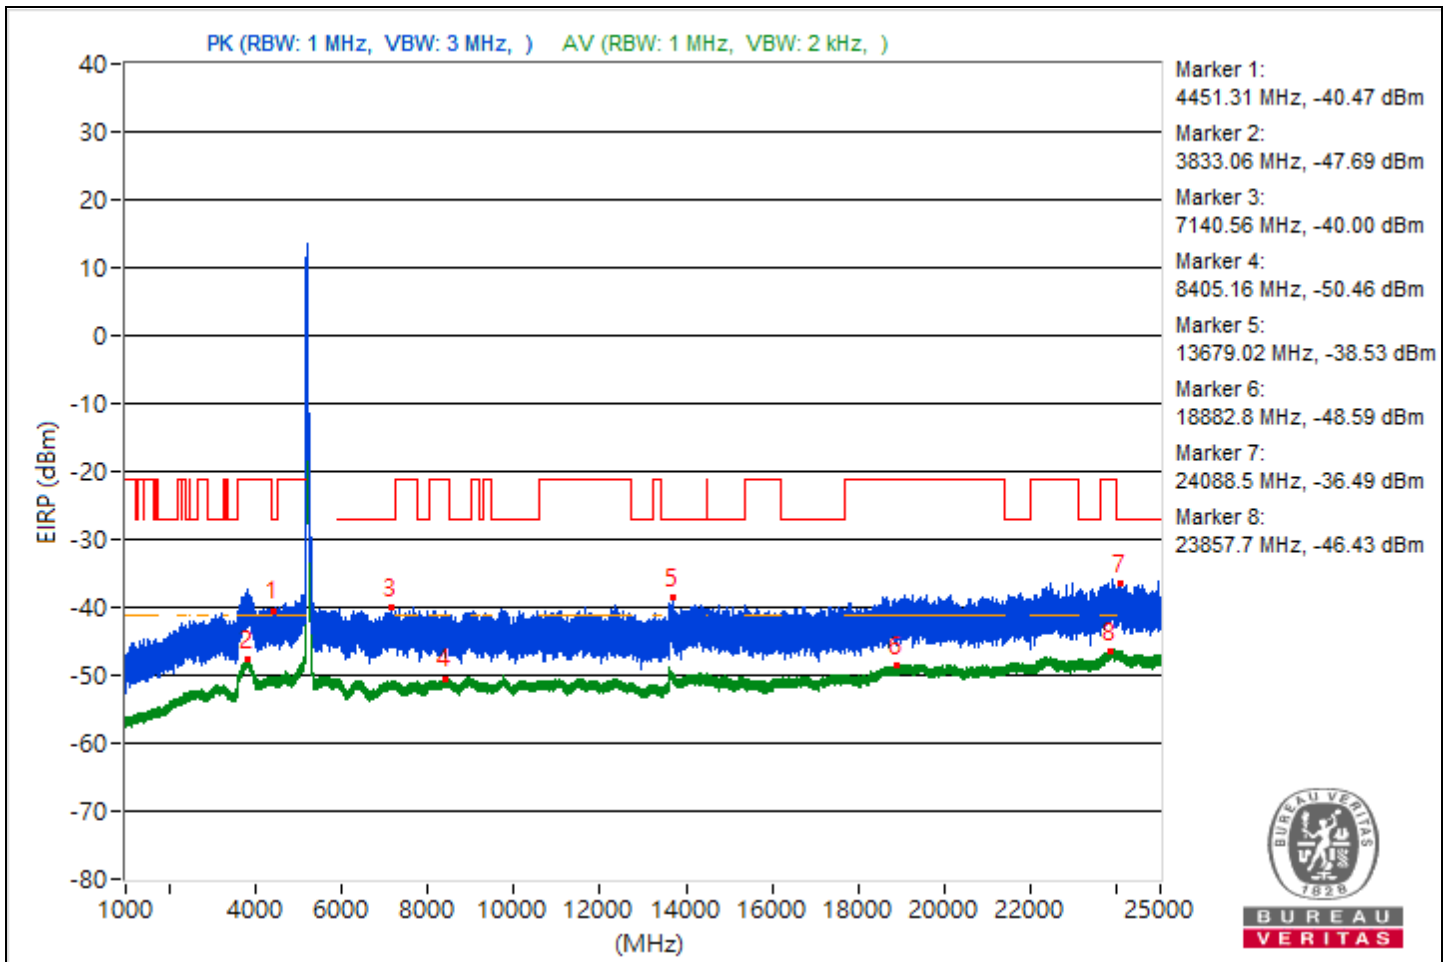

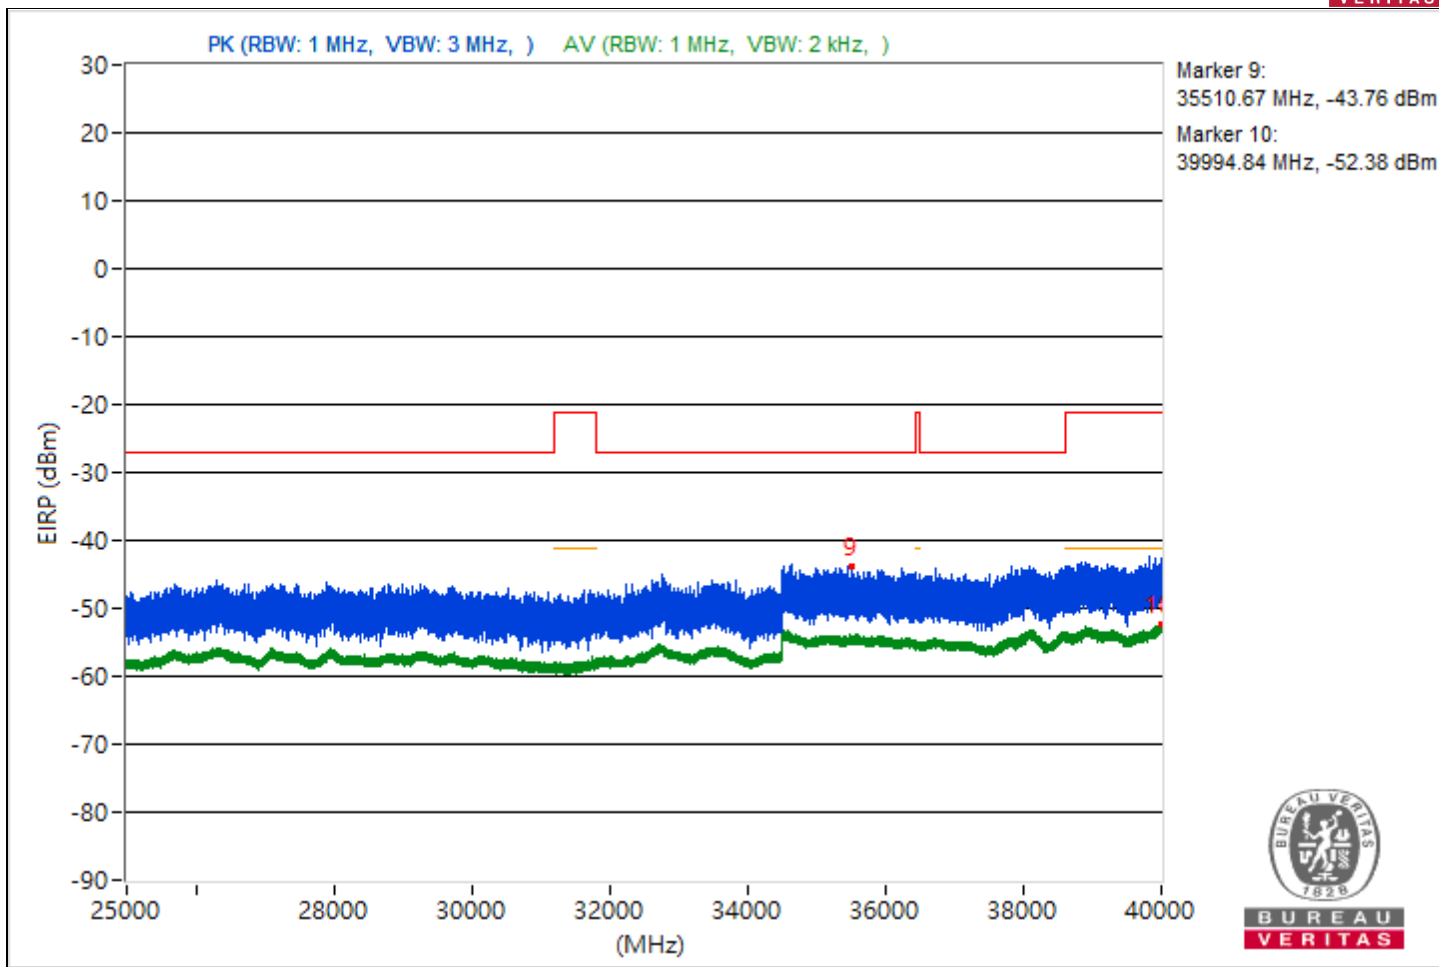







RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4423.78	54.57 PK	68.26	-13.69	-51.47	-46.92	4.92	-40.69
2	3826.83	47.59 AV	54	-6.41	-56.18	-55.09	4.92	-47.67
3	#5909.88	56.44 PK	68.26	-11.82	-44.72	-50.68	4.92	-38.82
4	8417.42	44.75 AV	54	-9.25	-58.05	-58.85	4.92	-50.51
5	#14074.93	56.37 PK	68.26	-11.89	-49.43	-45.2	4.92	-38.89
6	18766.7	46.27 AV	54	-7.73	-57.67	-56.29	4.92	-48.99
7	#24196.6	58.82 PK	68.26	-9.44	-42.36	-48.23	4.92	-36.44
8	23847.9	48.97 AV	54	-5.03	-54.69	-53.79	4.92	-46.29
9	#38010.76	52.18 PK	68.26	-16.08	-48.52	-57.52	4.92	-43.08
10	39995.73	42.93 AV	54	-11.07	-59.86	-60.69	4.92	-52.33

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

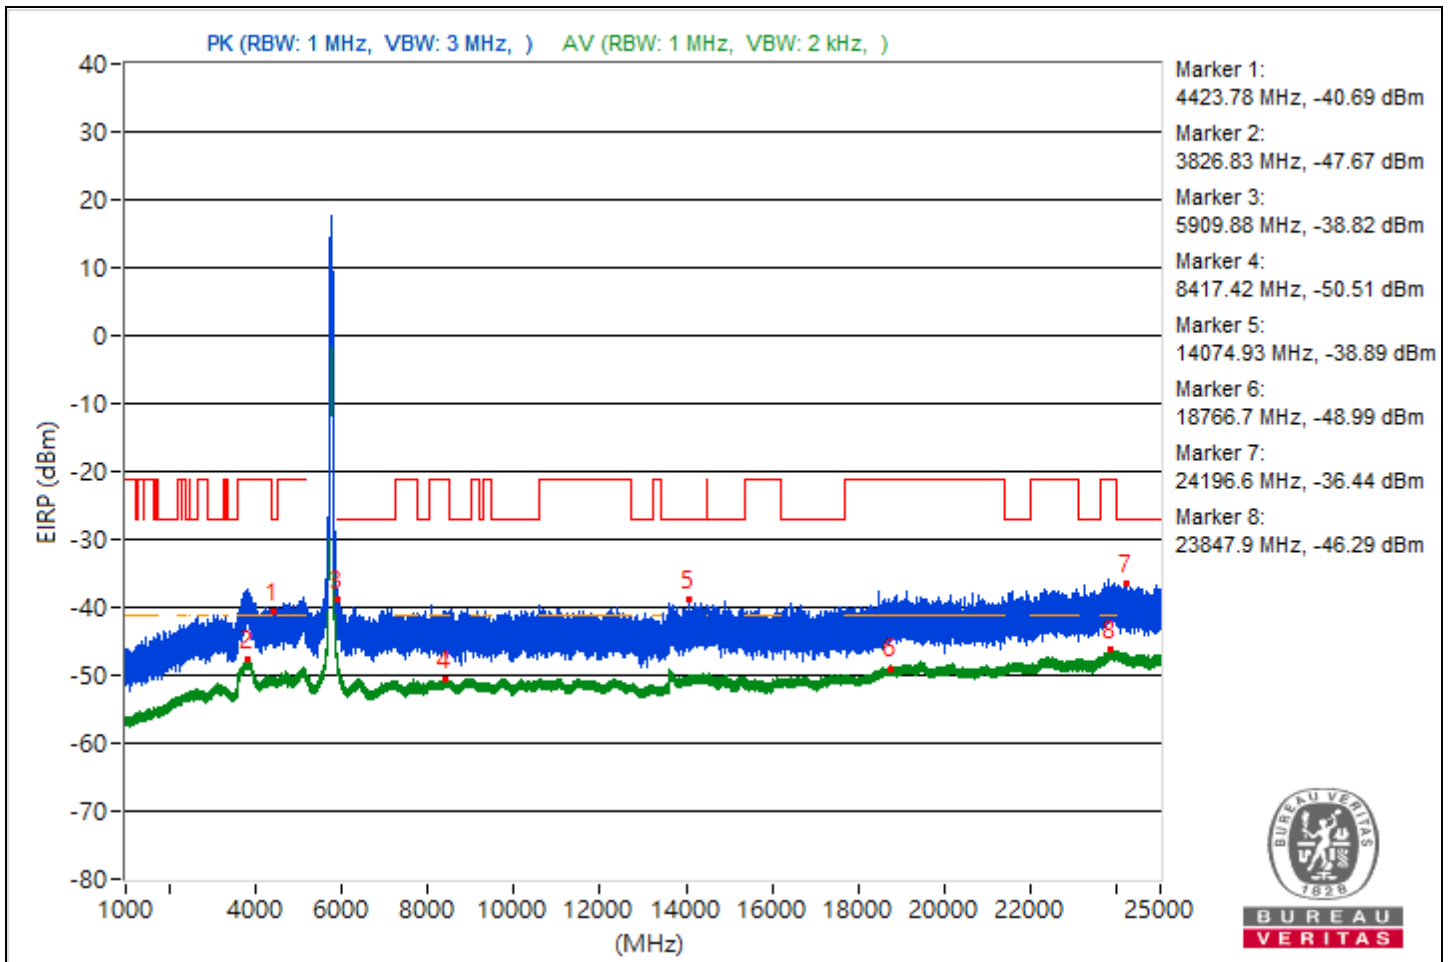

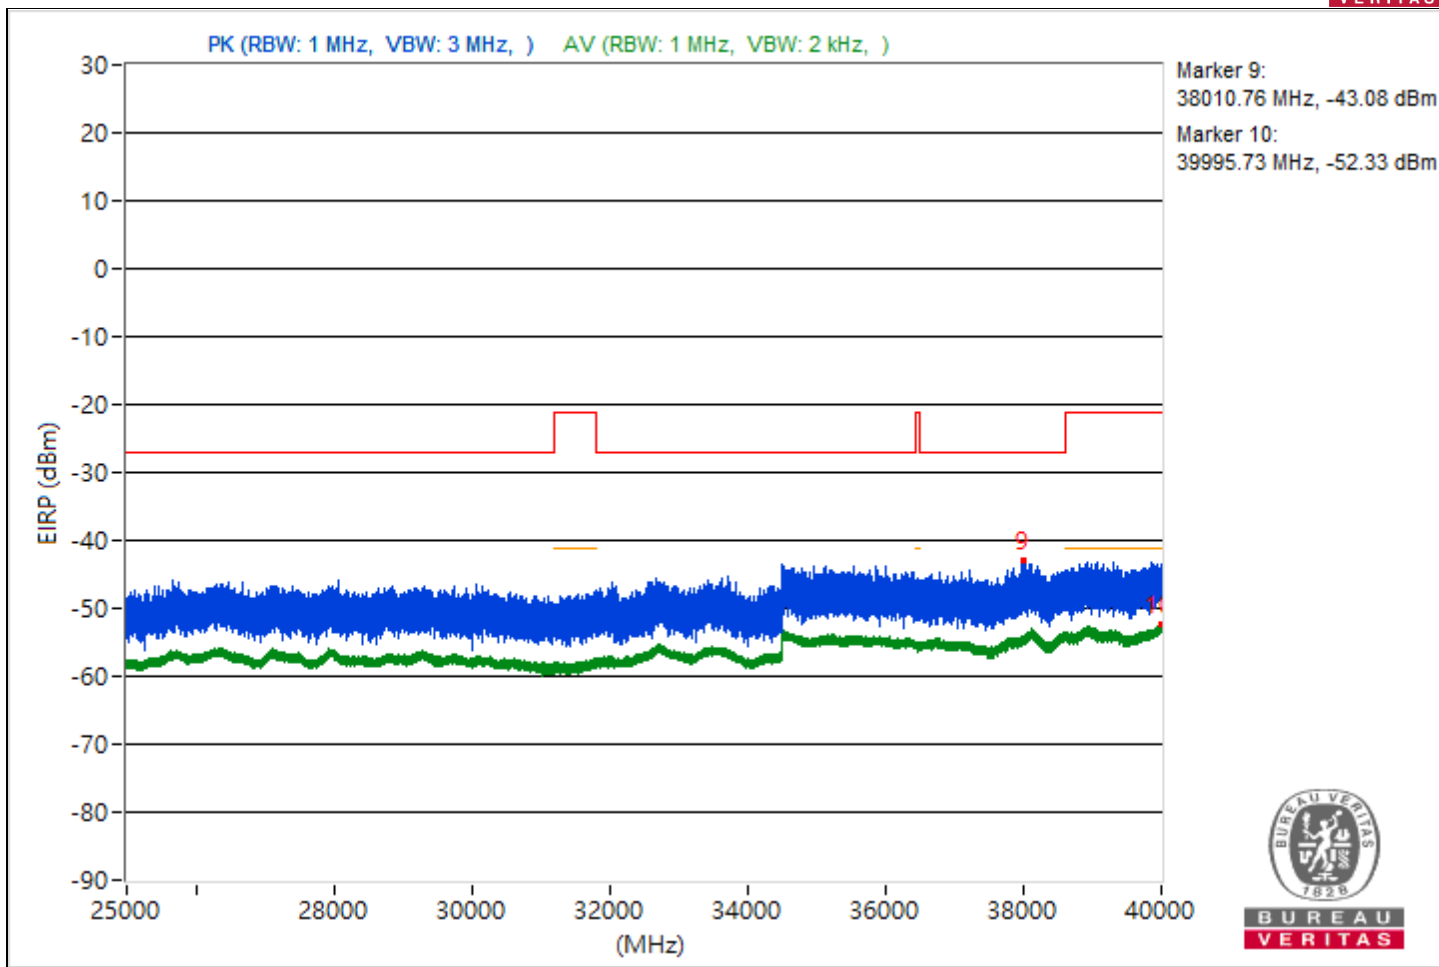


## Conducted Band Edges

RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5179.85	118.54 PK			13.03	16.86	4.92	23.28
2	*5179.1	108.87 AV			5.59	5.76	4.92	13.61
3	5078.32	66.63 PK	74	-7.37	-38.79	-35.1	4.92	-28.63
4	5149.23	49.51 AV	54	-4.49	-53.98	-53.4	4.92	-45.75

### Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

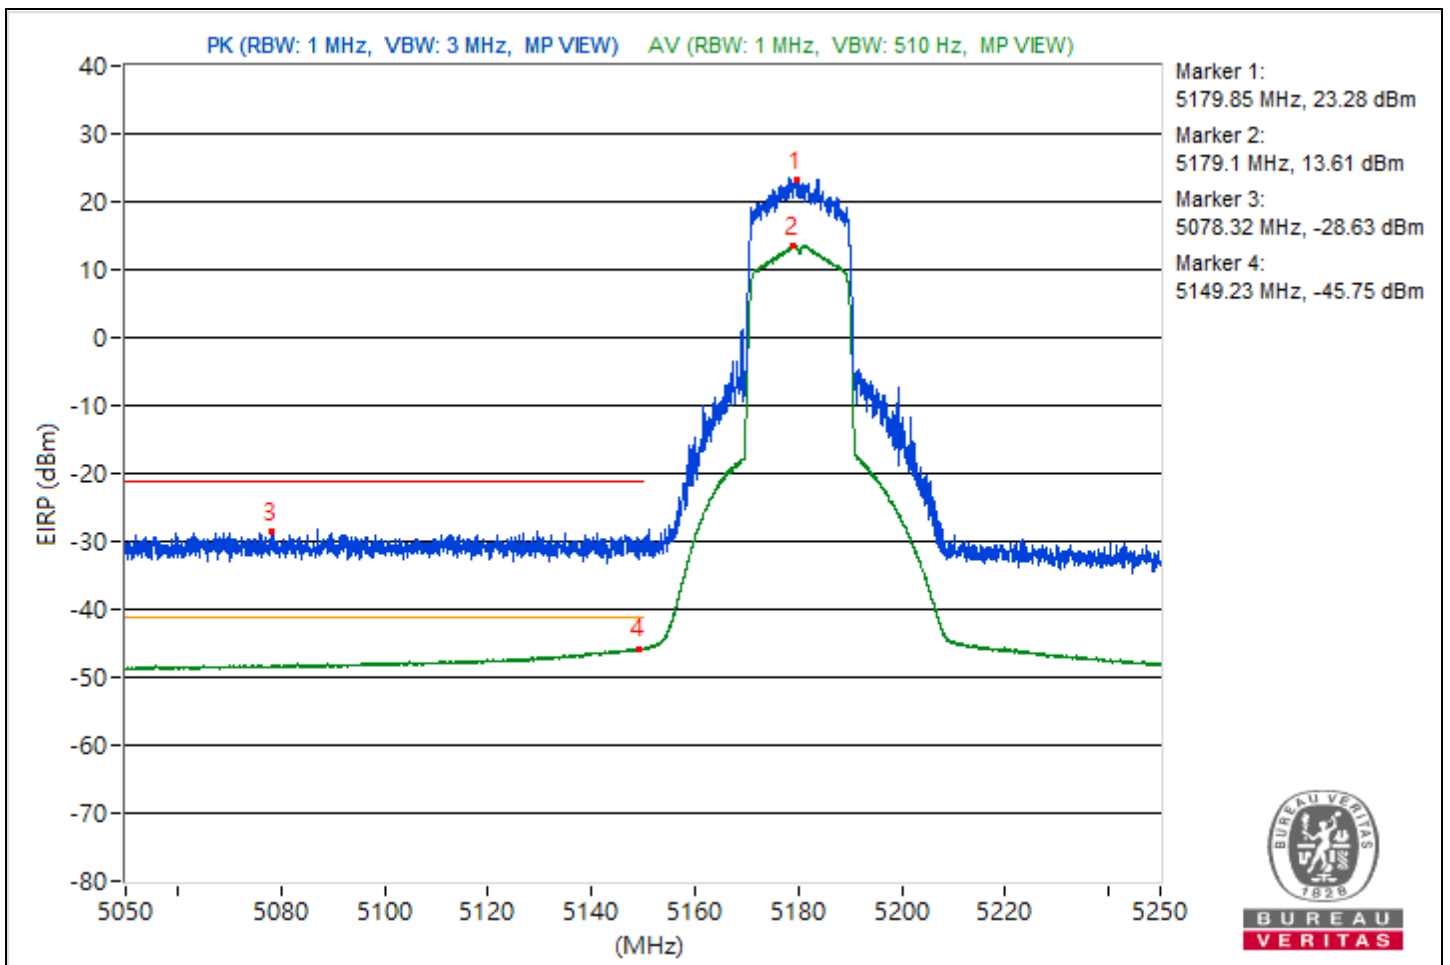


RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5202.48	118.11 PK			13.67	15.89	4.92	22.85
2	*5199.43	109.11 AV			5.94	5.89	4.92	13.85
3	5109.9	66.57 PK	74	-7.43	-34.73	-40.02	4.92	-28.69
4	5149.8	48.15 AV	54	-5.85	-55.16	-54.94	4.92	-47.11

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

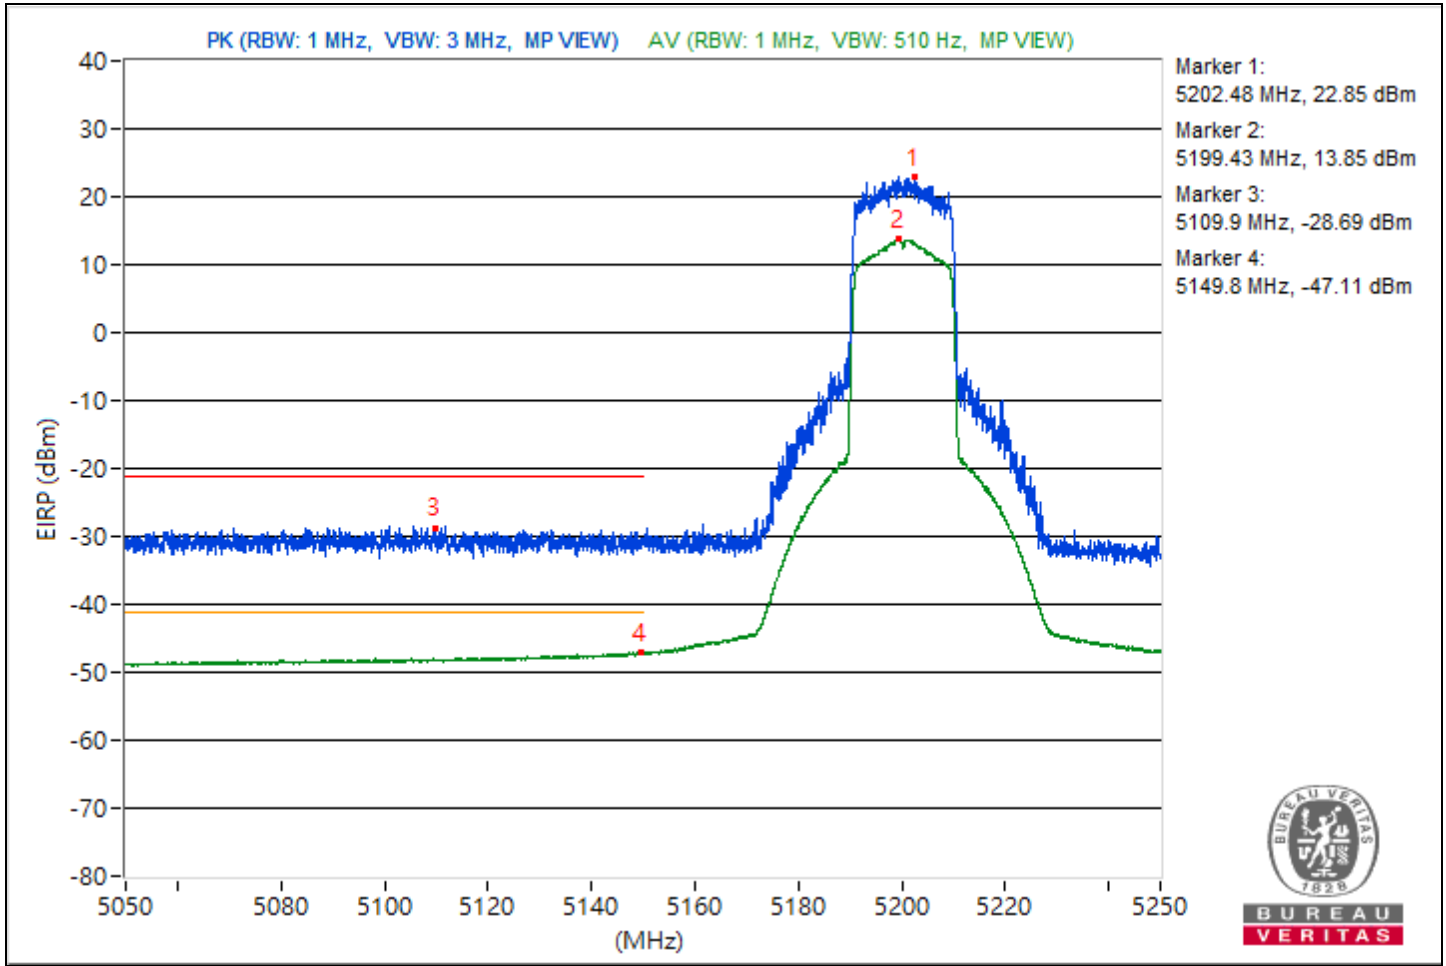


RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5239.6	118.71 PK			16.43	14.36	4.92	23.45
2	*5239.02	108.76 AV			5.86	5.25	4.92	13.5
3	5096.5	66.71 PK	74	-7.29	-35.31	-38.09	4.92	-28.55
4	5147.62	47.36 AV	54	-6.64	-55.8	-55.86	4.92	-47.9

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

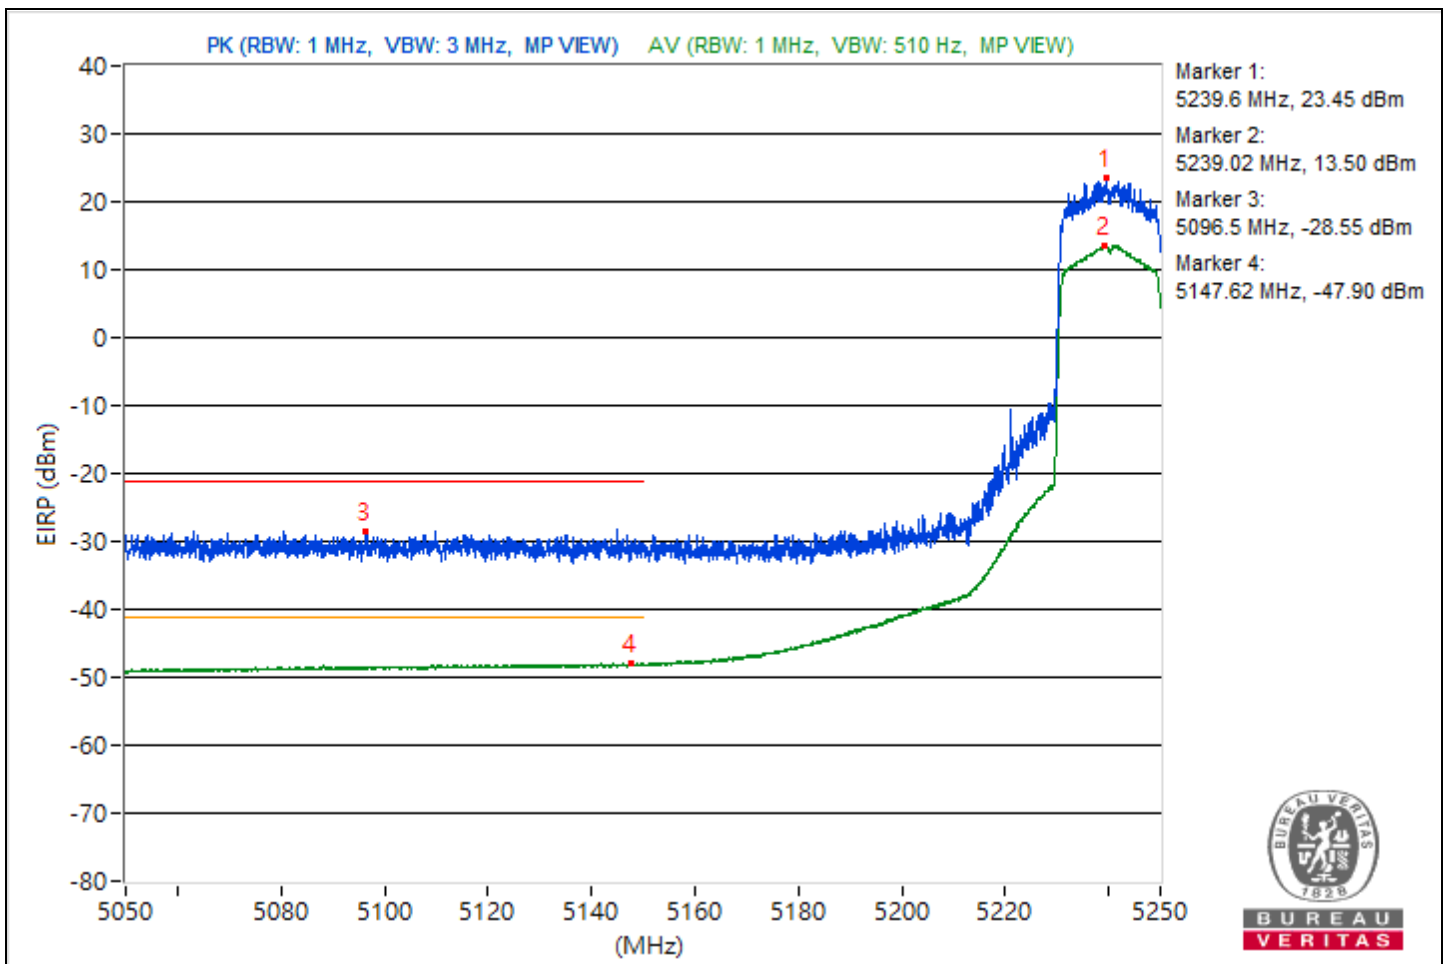


RF Mode	802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5256.5	117.69 PK			16.17	11.73	4.92	22.43
2	*5259.25	108.64 AV			5.39	5.51	4.92	13.38
3	5369.65	64.42 PK	74	-9.58	-41.58	-37.07	4.92	-30.84
4	5353.12	46.18 AV	54	-7.82	-57.06	-56.97	4.92	-49.08

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

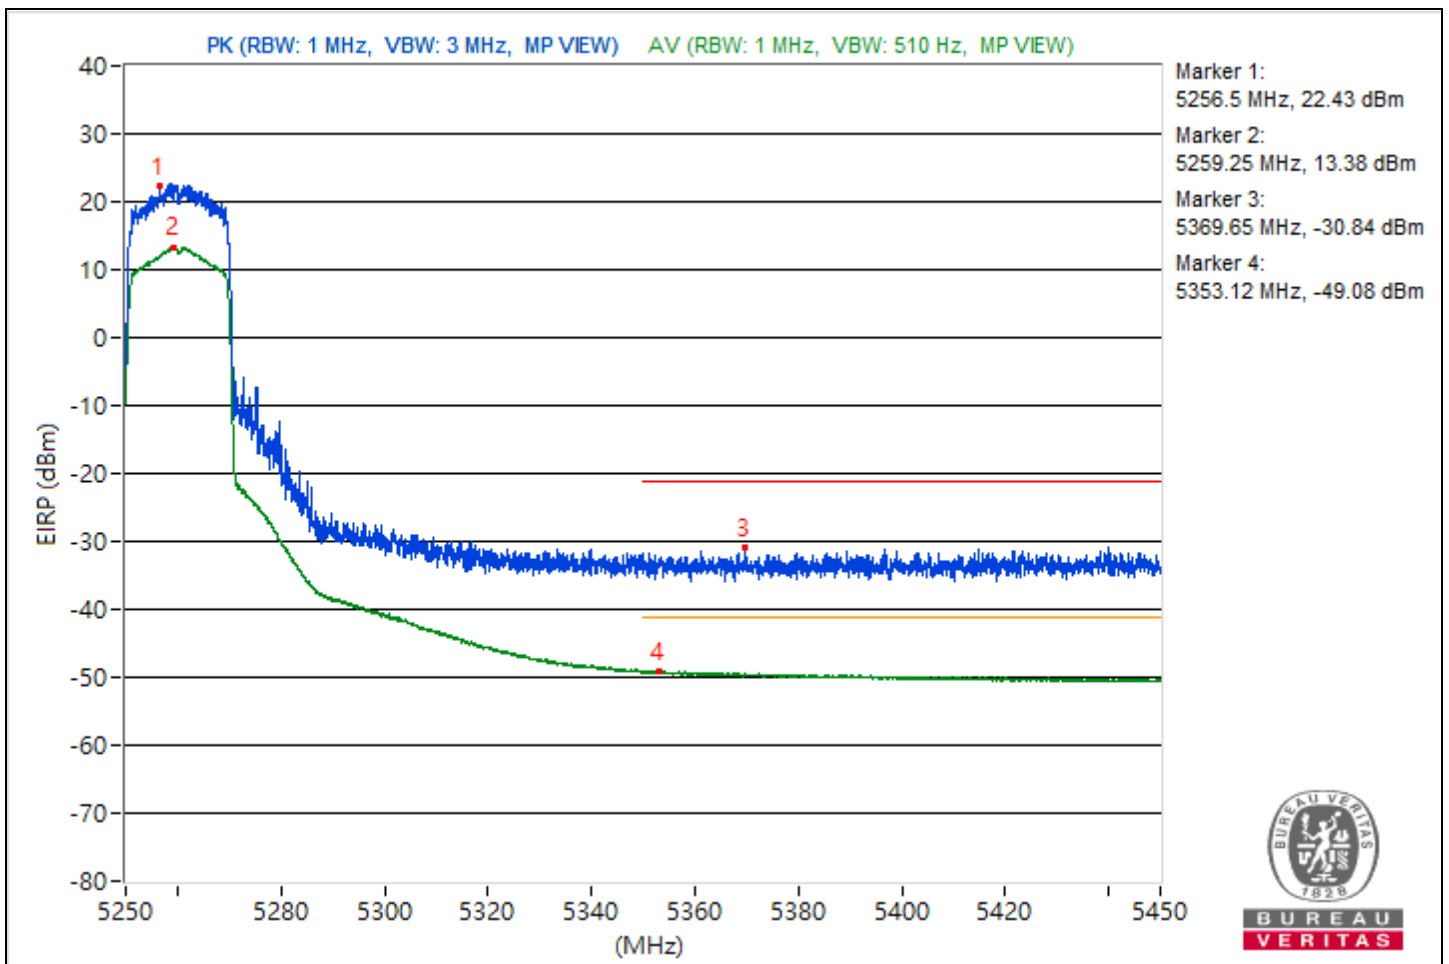


RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5299.32	118.14 PK			13.05	16.27	4.92	22.88
2	*5299.23	108.48 AV			5.26	5.32	4.92	13.22
3	5446.1	64.78 PK	74	-9.22	-36.98	-40.58	4.92	-30.48
4	5350.02	47.2 AV	54	-6.8	-55.82	-56.18	4.92	-48.06

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

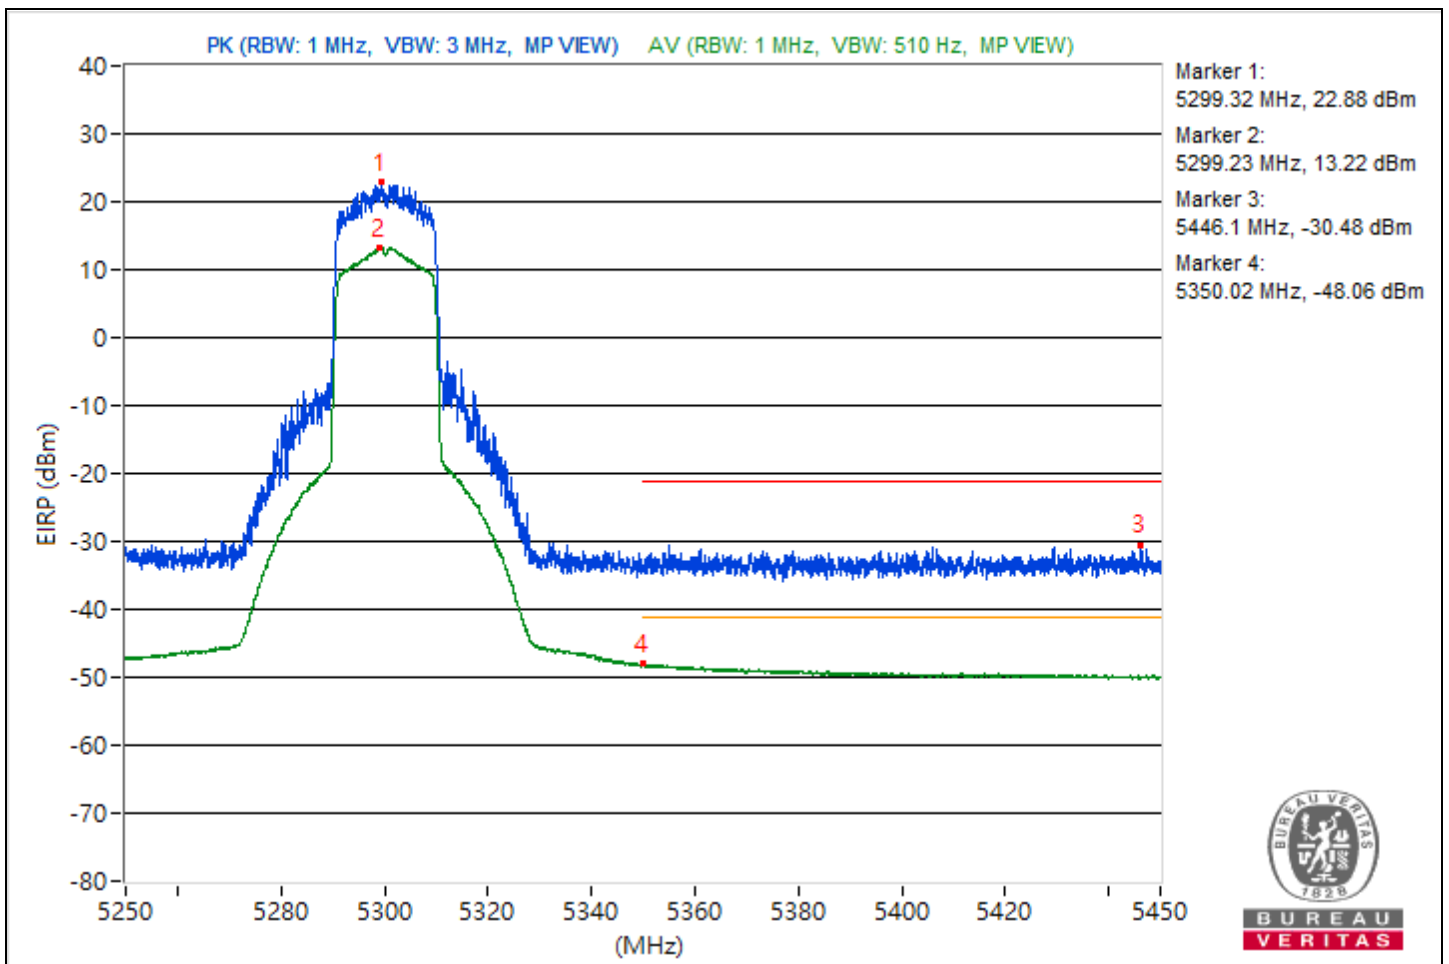


RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5319.7	118.34 PK			13.44	16.37	4.92	23.08
2	*5319.18	108.57 AV			5.62	5.14	4.92	13.31
3	5412.2	64.9 PK	74	-9.1	-40.82	-36.7	4.92	-30.36
4	5350.35	48.98 AV	54	-5.02	-54.85	-53.65	4.92	-46.28

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

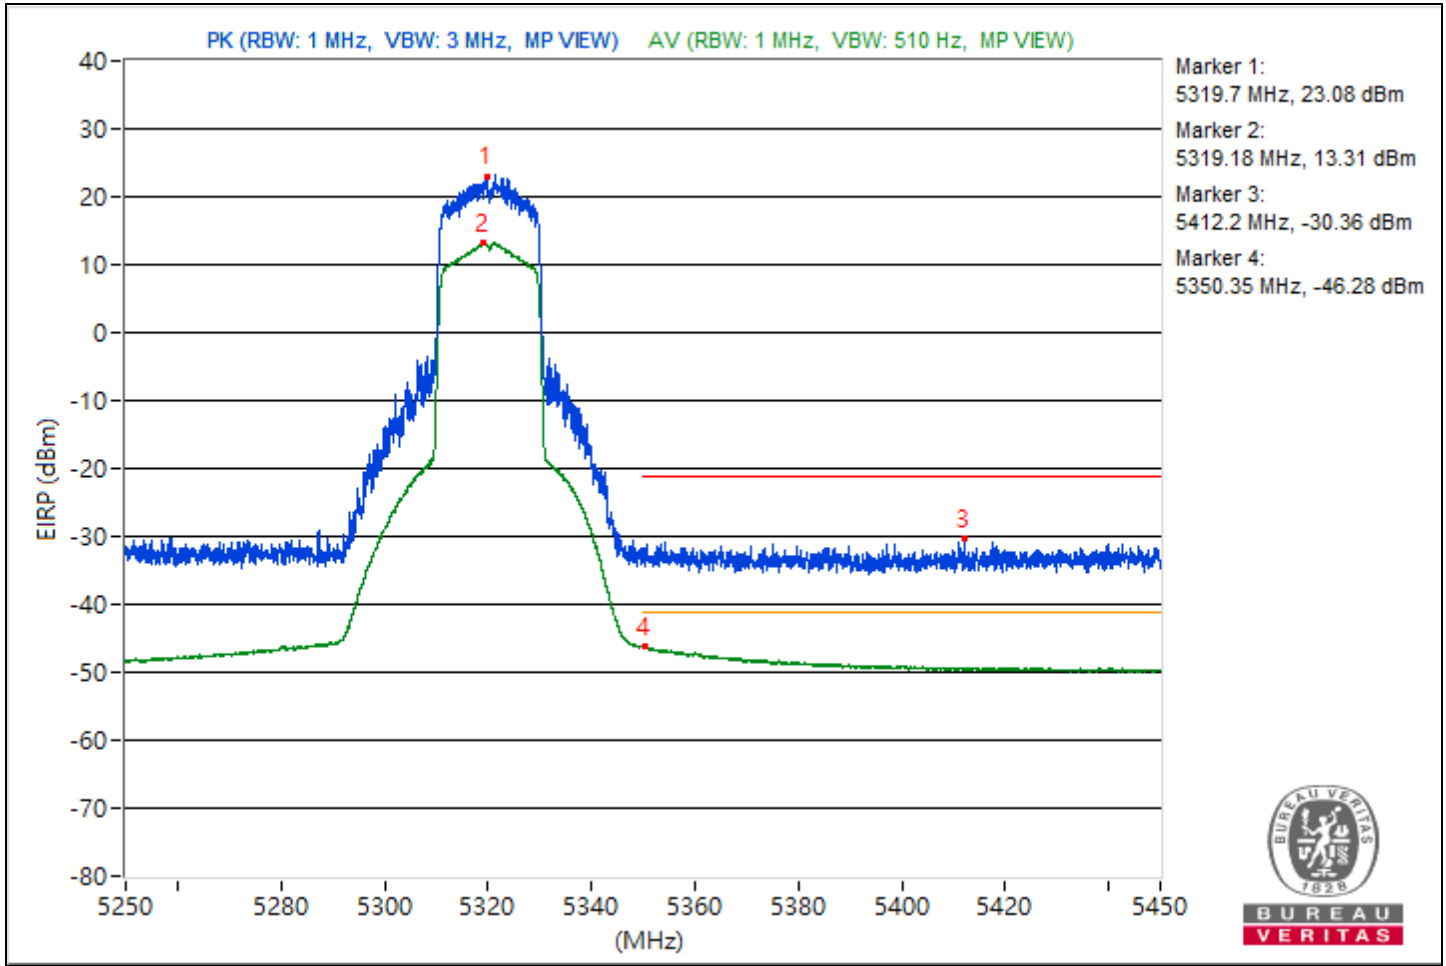




RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5499.78	118.73 PK			16.57	14.19	4.92	23.47
2	5448.72	64.46 PK	74	-9.54	-37.11	-41.34	4.92	-30.8
3	#5468.78	64.02 PK	68.26	-4.24	-37.73	-41.33	4.92	-31.24
4	*5501.16	108.65 AV			5.79	5.11	4.92	13.39
5	5459.94	48.27 AV	54	-5.73	-54.99	-54.86	4.92	-46.99

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

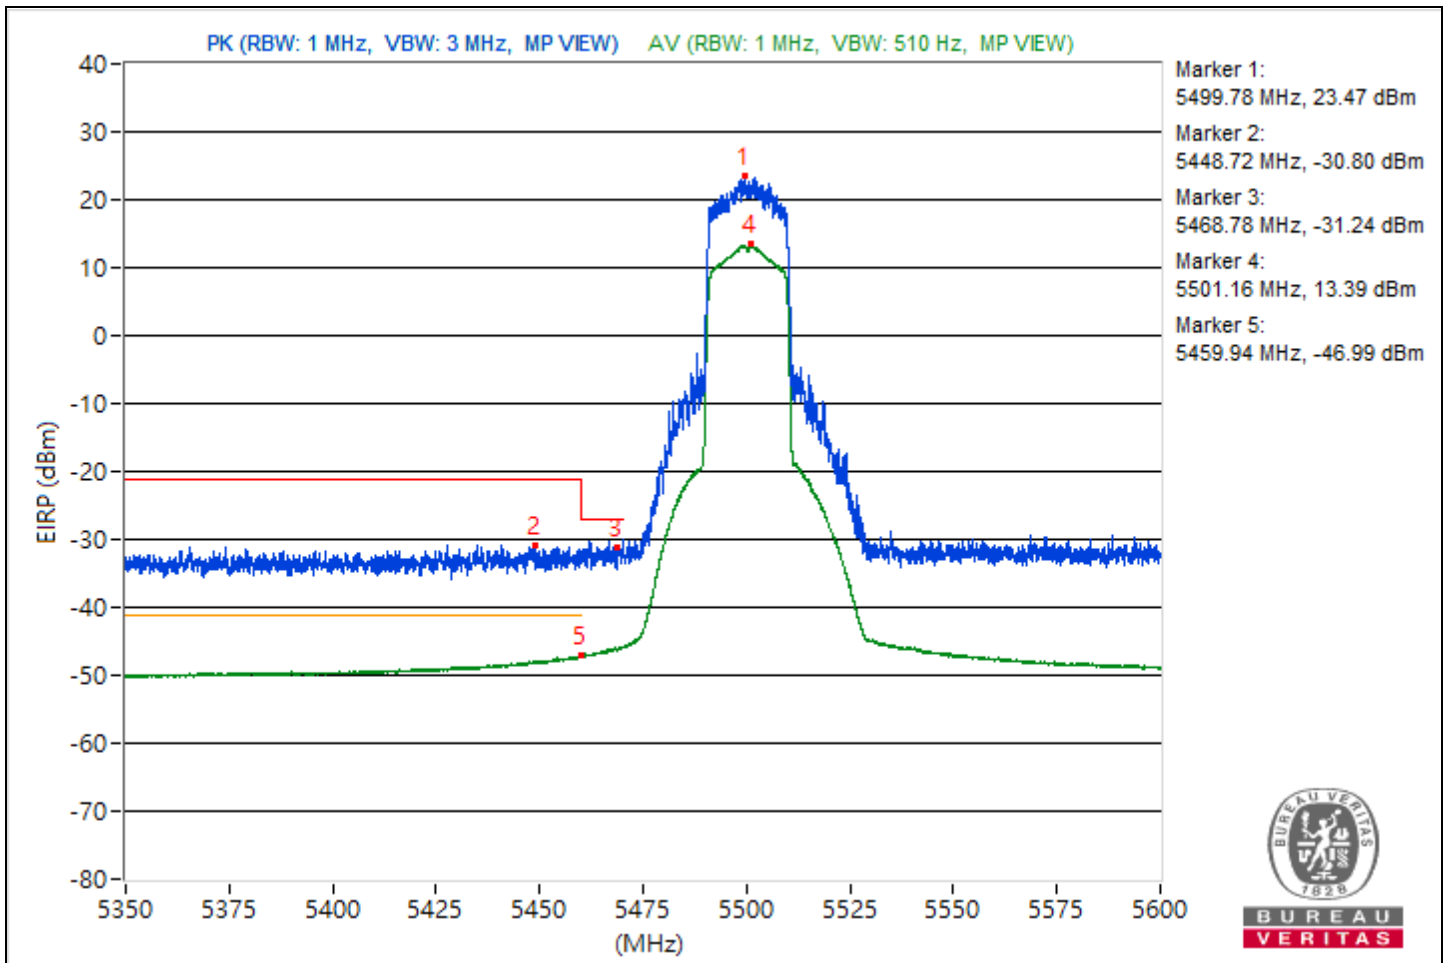


RF Mode	802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5581.44	118.86 PK			15.35	15.97	4.92	23.6
2	5424.66	64.86 PK	74	-9.14	-36.53	-41.43	4.92	-30.4
3	#5467.87	63.83 PK	68.26	-4.43	-38.31	-40.73	4.92	-31.43
4	*5581.03	108.84 AV			5.56	5.74	4.92	13.58
5	5458.22	45.89 AV	54	-8.11	-57.15	-57.45	4.92	-49.37

Notes:


1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

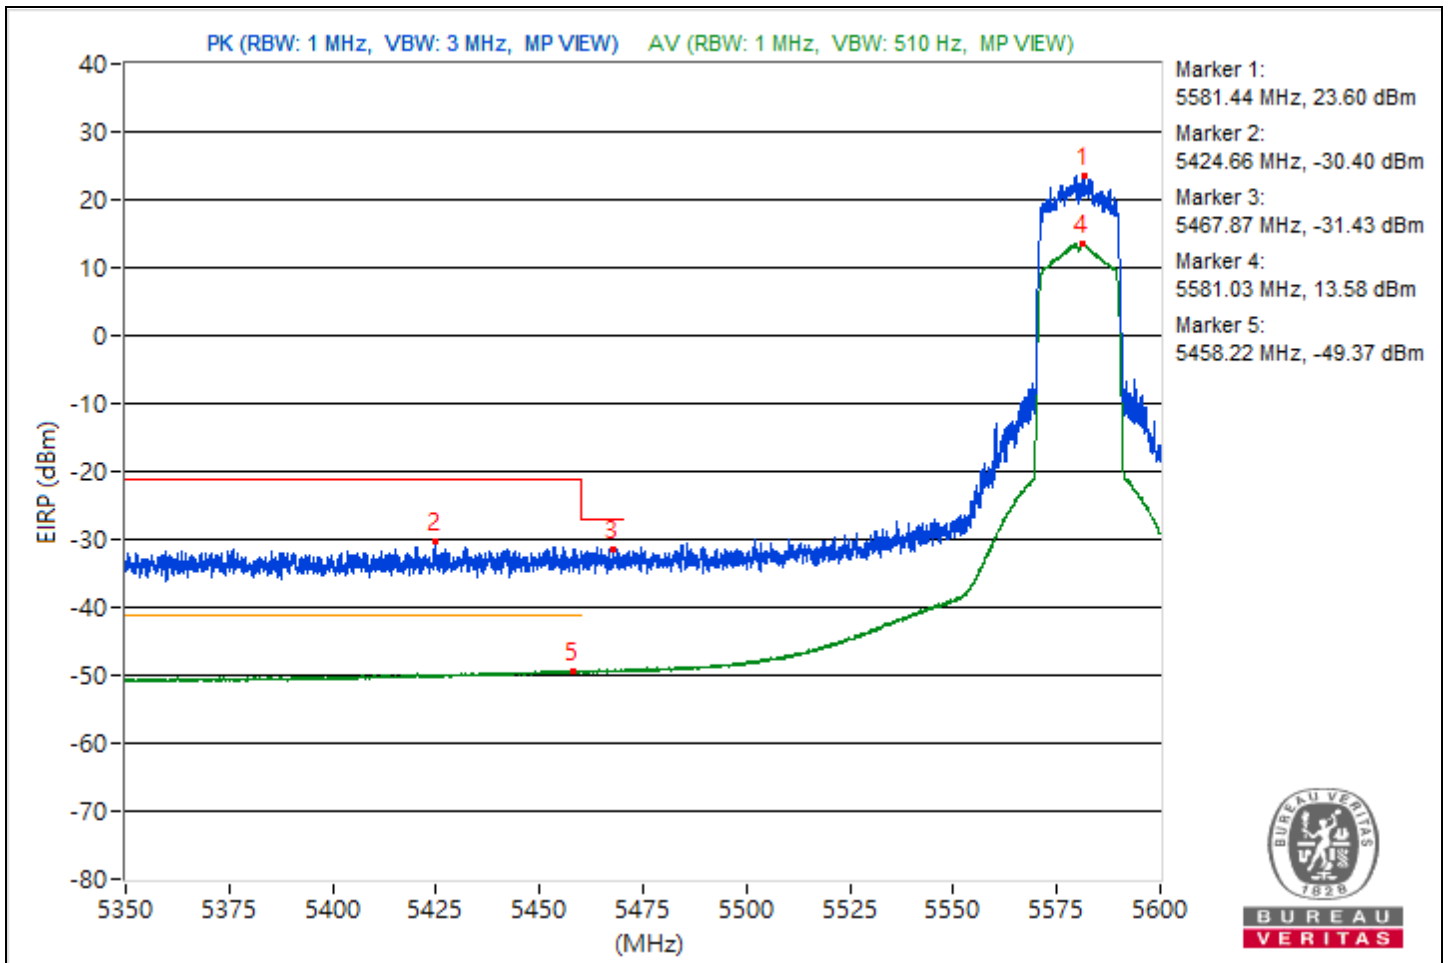

RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5699.75	118.71			14.82	16.13	4.92	23.45
2	#5804.7	64.95	68.26	-3.31	-36.59	-40.95	4.92	-30.31

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
  3. " # ": The radiated frequency is out of the restricted band.

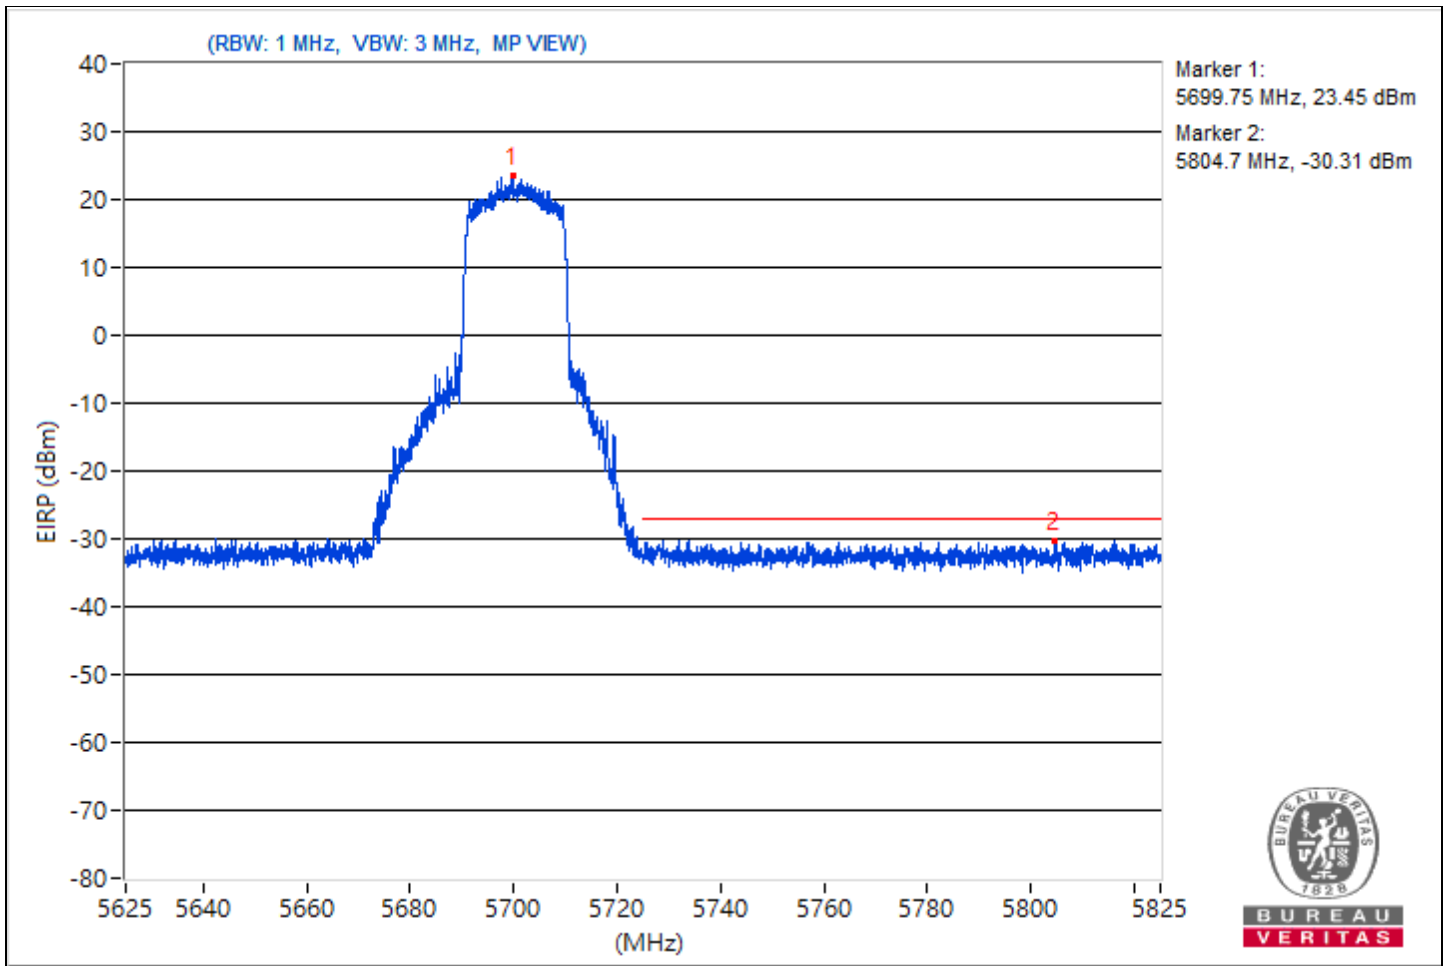


RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5719.43	119.26			16.37	15.75	4.92	24
2	#5911.87	64.92	68.26	-3.34	-40.92	-36.64	4.92	-30.34

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

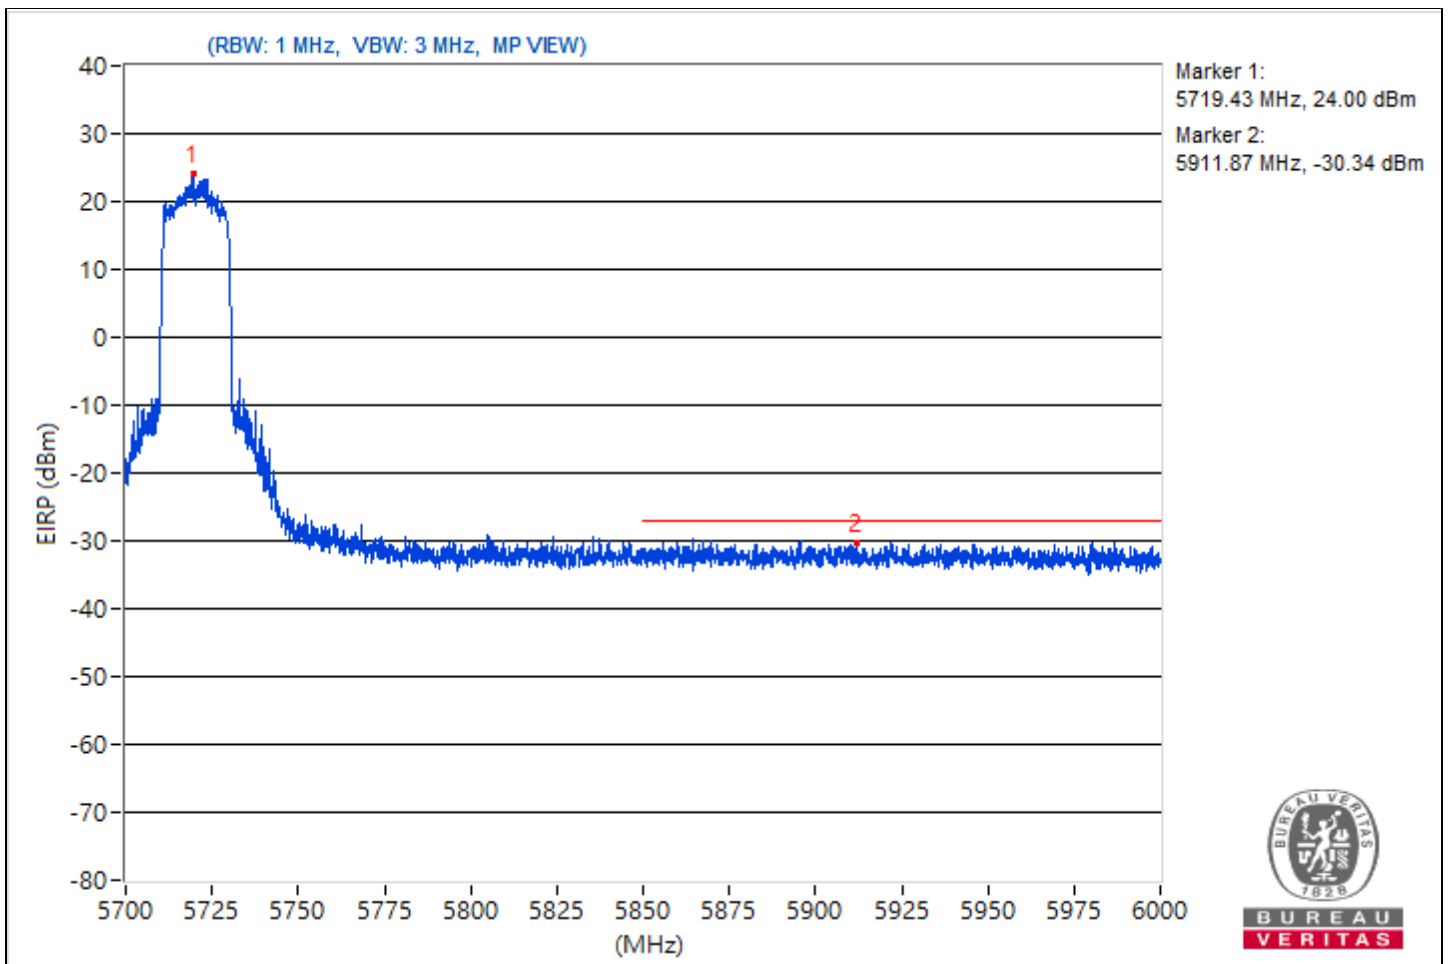


RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5744.99	122.73			20.29	18.63	4.92	27.47
2	#5640.73	59.03	68.26	-9.23	-46.98	-42.47	4.92	-36.23
3	#5650.34	59.67	68.51	-8.84	-45.01	-42.42	4.92	-35.59
4	#5719.1	90.22	110.61	-20.39	-12.51	-13.49	4.92	-5.04
5	#5720.29	94.18	111.52	-17.34	-9.54	-8.53	4.92	-1.08
6	#5854.24	57.6	112.6	-55	-45.37	-45.82	4.92	-37.66
7	#5874.54	56.67	105.39	-48.72	-47.41	-45.77	4.92	-38.59
8	#5924.77	55.16	68.43	-13.27	-48.1	-47.97	4.92	-40.1
9	#5934.99	57.09	68.26	-11.17	-44.79	-47.99	4.92	-38.17

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

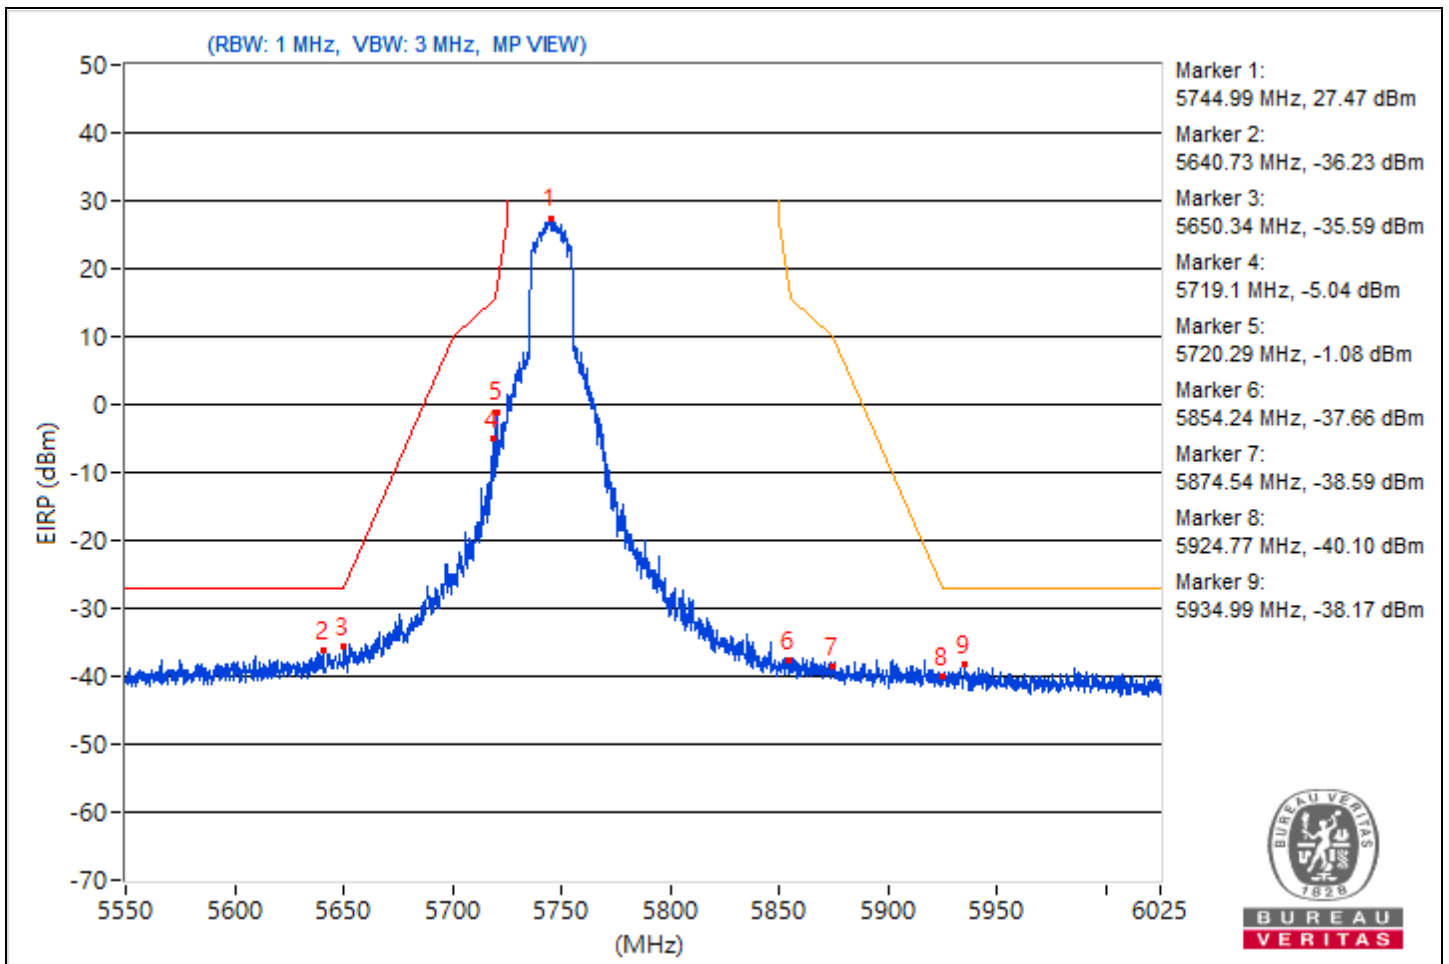


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5785.48	122.92			20.79	18.33	4.92	27.66
2	#5602.01	57.27	68.26	-10.99	-44.24	-48.69	4.92	-37.99
3	#5650.46	56.08	68.6	-12.52	-46.36	-48.01	4.92	-39.18
4	#5711.5	63.17	108.48	-45.31	-44.5	-37.86	4.92	-32.09
5	#5720.05	63.36	110.97	-47.61	-39.34	-40.38	4.92	-31.9
6	#5854.83	62.08	111.24	-49.16	-40.18	-42.29	4.92	-33.18
7	#5857.92	62.67	110.04	-47.37	-39.25	-42.33	4.92	-32.59
8	#5924.3	57.07	68.78	-11.71	-45.68	-46.6	4.92	-38.19
9	#5933.8	57.23	68.26	-11.03	-48.78	-44.26	4.92	-38.03

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

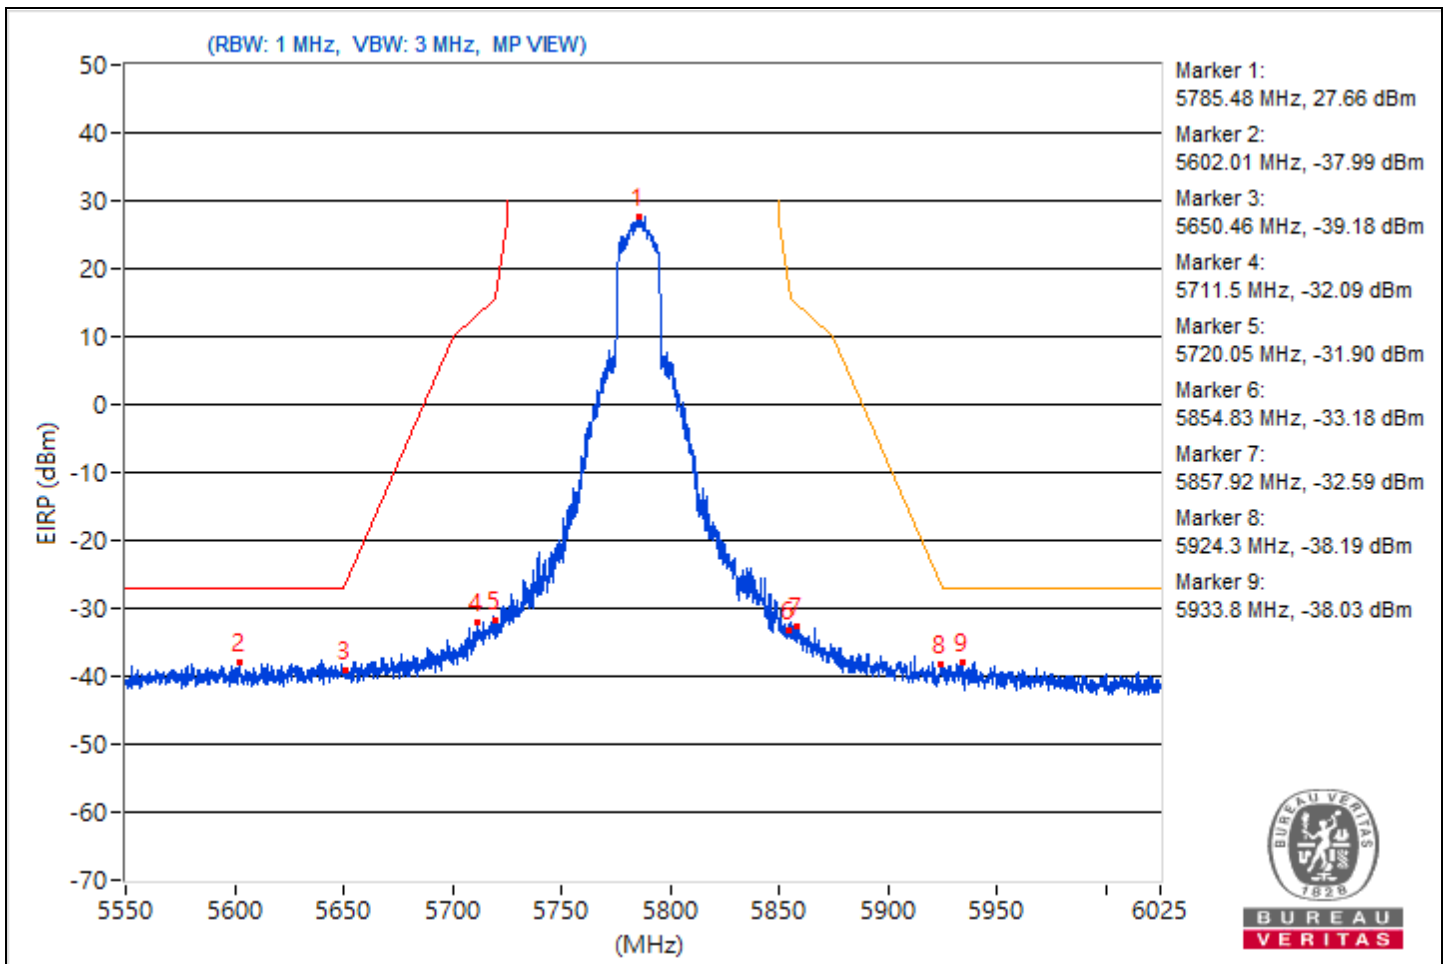


RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.33	123.19			20.89	18.89	4.92	27.93
2	#5635.62	56.67	68.26	-11.59	-48.03	-45.4	4.92	-38.59
3	#5650.23	55.21	68.43	-13.22	-47.83	-48.14	4.92	-40.05
4	#5702.71	57.17	106.02	-48.85	-47.21	-45.09	4.92	-38.09
5	#5720.05	56.29	110.97	-54.68	-46.65	-47.16	4.92	-38.97
6	#5854.48	81.78	112.06	-30.28	-19.31	-25.64	4.92	-13.48
7	#5857.09	82.2	110.28	-28.08	-19.16	-24.22	4.92	-13.06
8	#5923.23	58.79	69.57	-10.78	-45.8	-43.34	4.92	-36.47
9	#5928.22	58.62	68.26	-9.64	-45.29	-43.95	4.92	-36.64

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

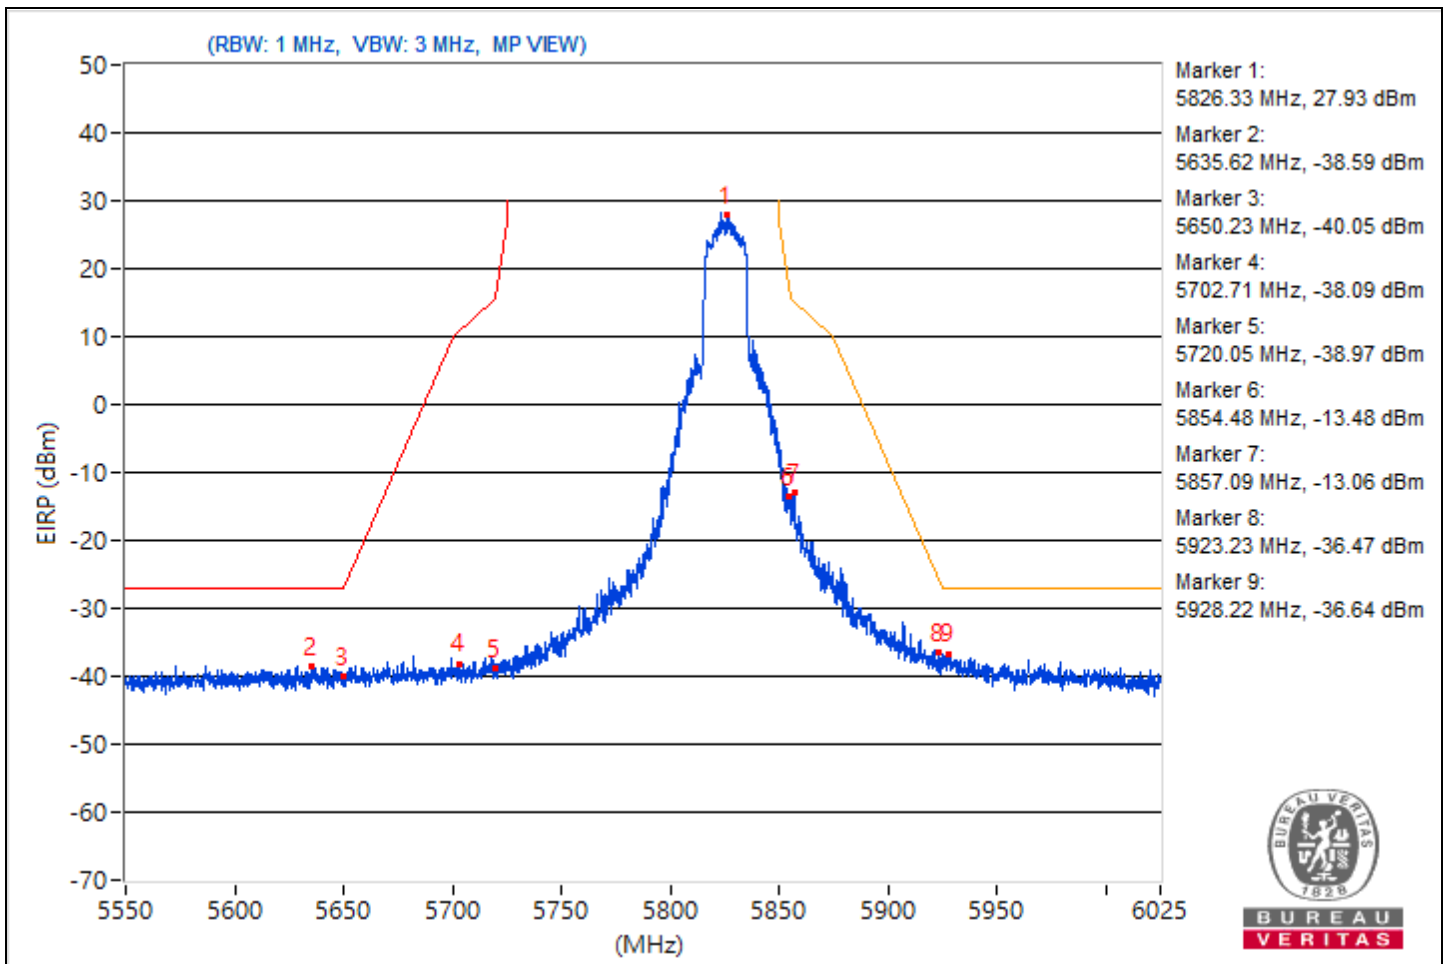


RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5191.77	115.02 PK			12.26	11.36	4.92	19.76
2	*5191.55	104.77 AV			0.92	2.16	4.92	9.51
3	5148.7	67.67 PK	74	-6.33	-34.6	-36.69	4.92	-27.59
4	5149.55	50.5 AV	54	-3.5	-54.68	-51.33	4.92	-44.76

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

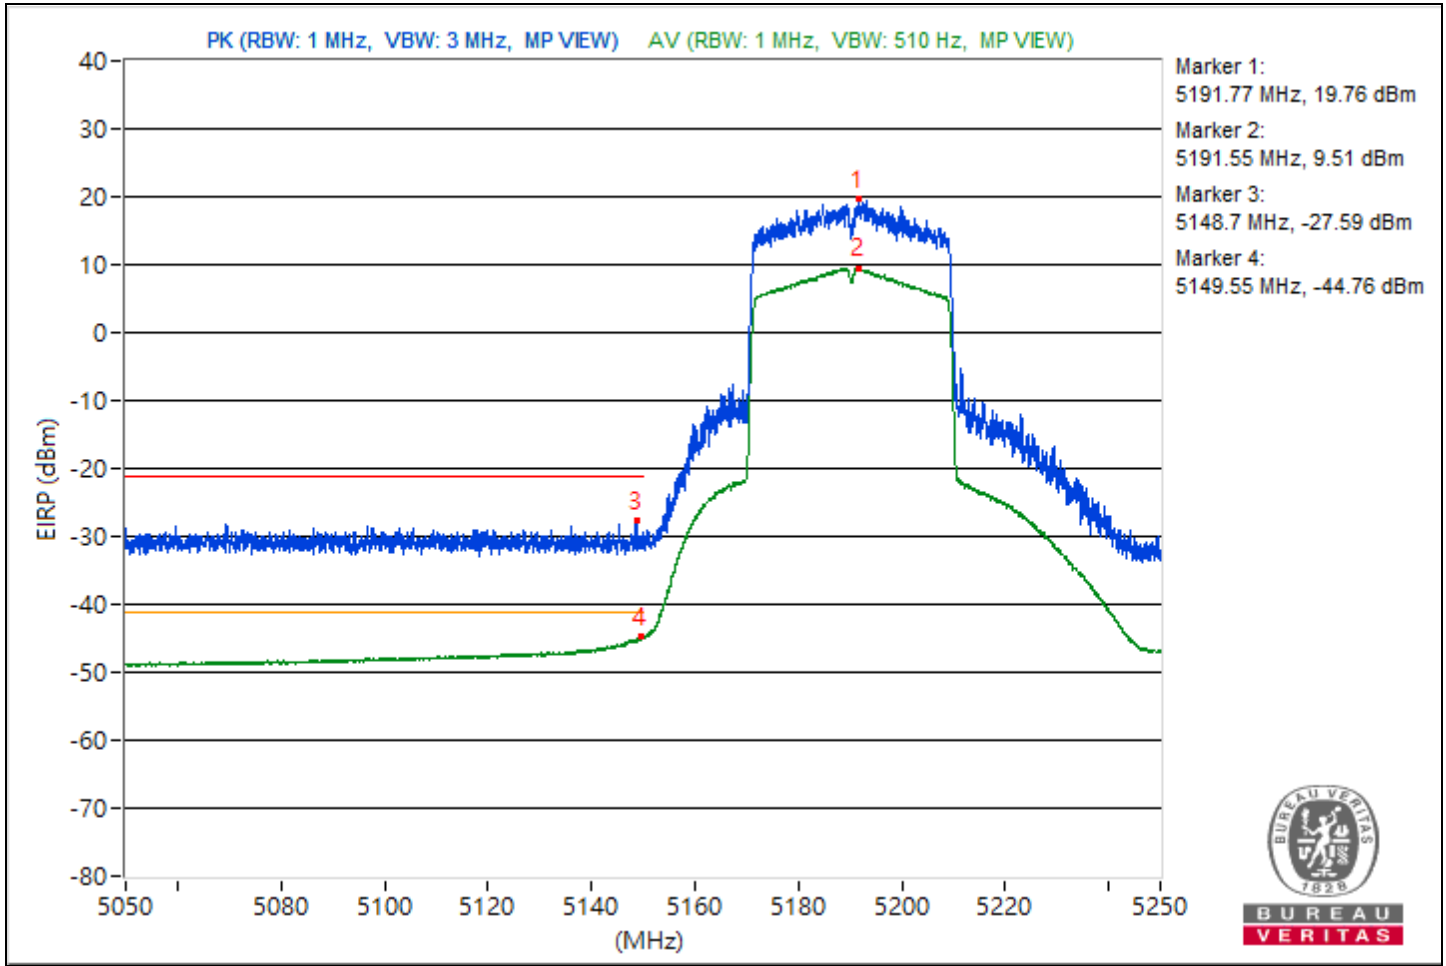




RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5234.35	116.91 PK			12.1	14.89	4.92	21.65
2	*5229.37	107.02 AV			3.86	3.79	4.92	11.76
3	5131.15	66.7 PK	74	-7.3	-39.49	-34.73	4.92	-28.56
4	5149.7	52.73 AV	54	-1.27	-50.69	-50.24	4.92	-42.53

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

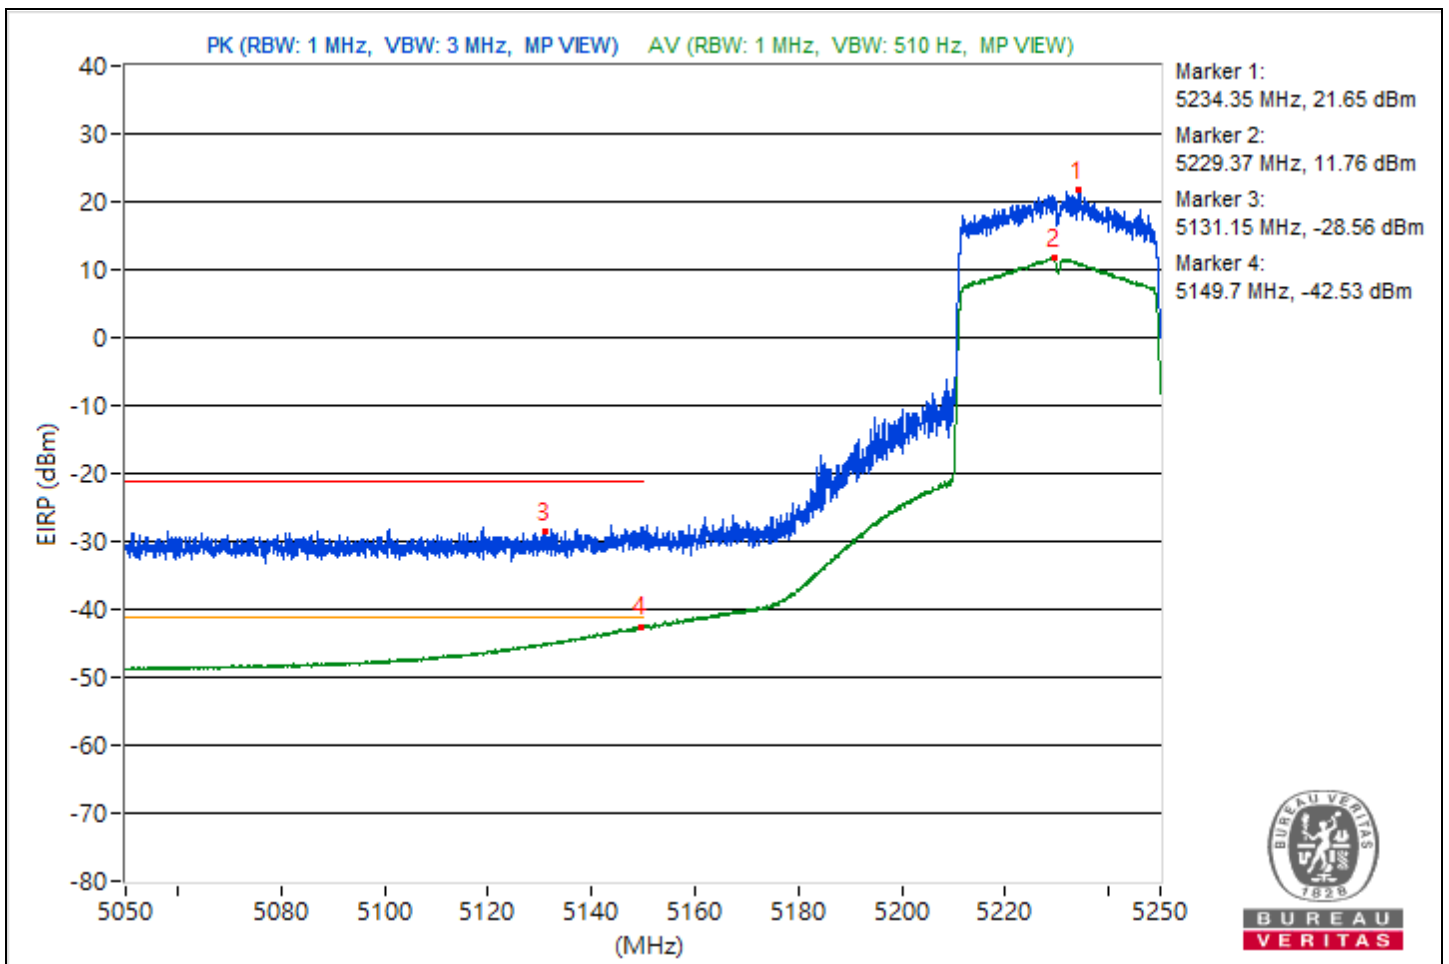


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5267.6	117.35 PK			14.64	13.62	4.92	22.09
2	*5269.07	106.75 AV			3.17	3.92	4.92	11.49
3	5350.4	65.06 PK	74	-8.94	-40.02	-36.81	4.92	-30.2
4	5350.2	52.38 AV	54	-1.62	-51.52	-50.2	4.92	-42.88

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

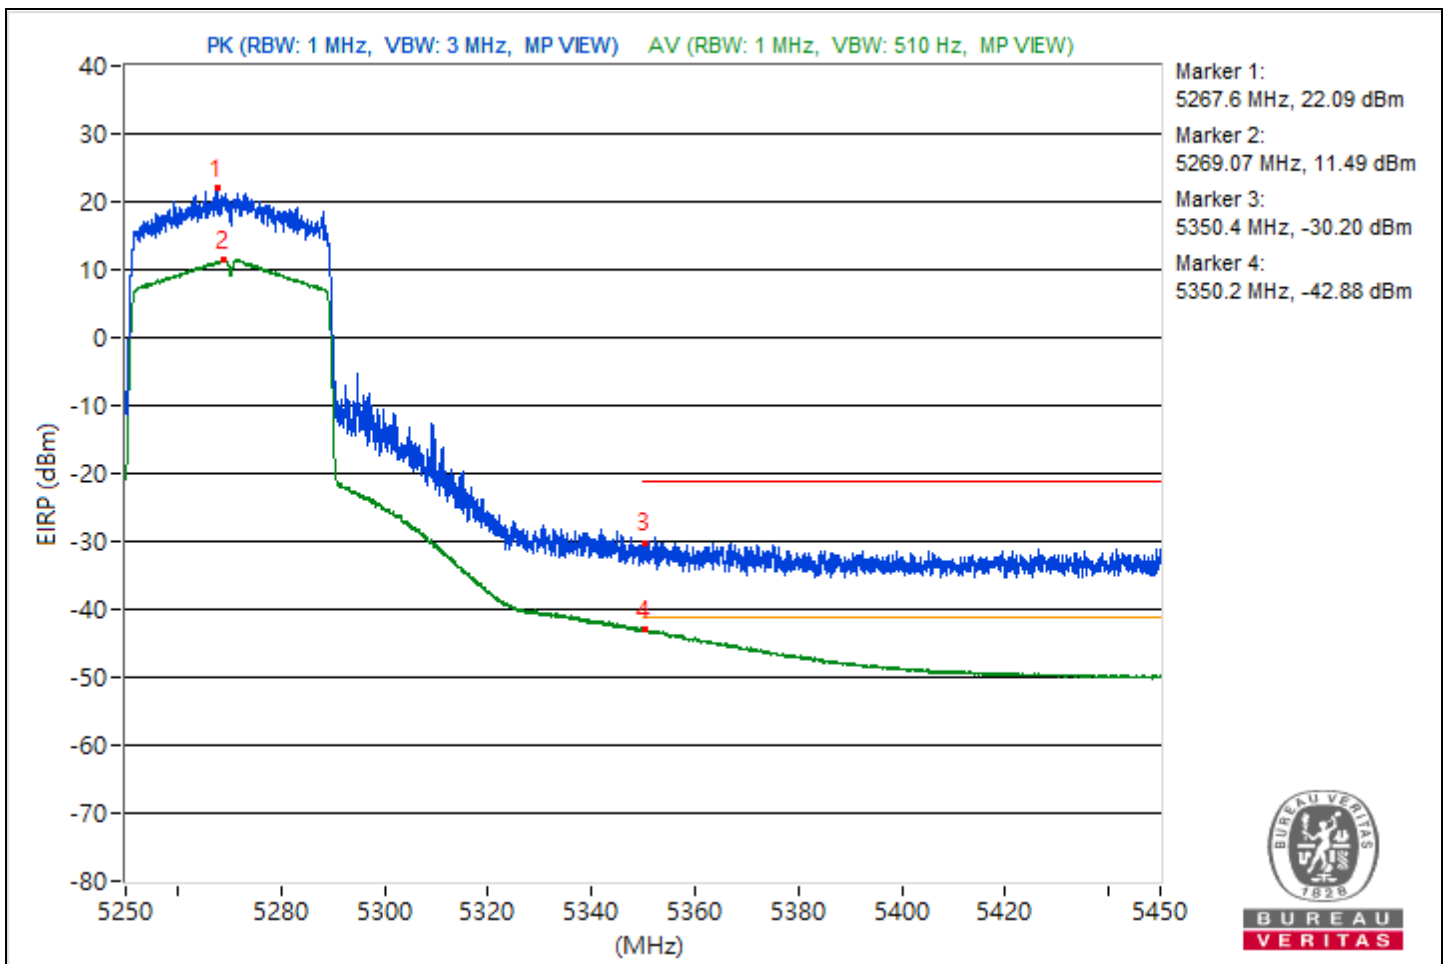


RF Mode	802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5307.8	115.43 PK			10.46	13.5	4.92	20.17
2	*5309.2	104.66 AV			1.4	1.53	4.92	9.4
3	5366.35	64.78 PK	74	-9.22	-38.04	-38.83	4.92	-30.48
4	5350.18	49.47 AV	54	-4.53	-54.41	-53.12	4.92	-45.79

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

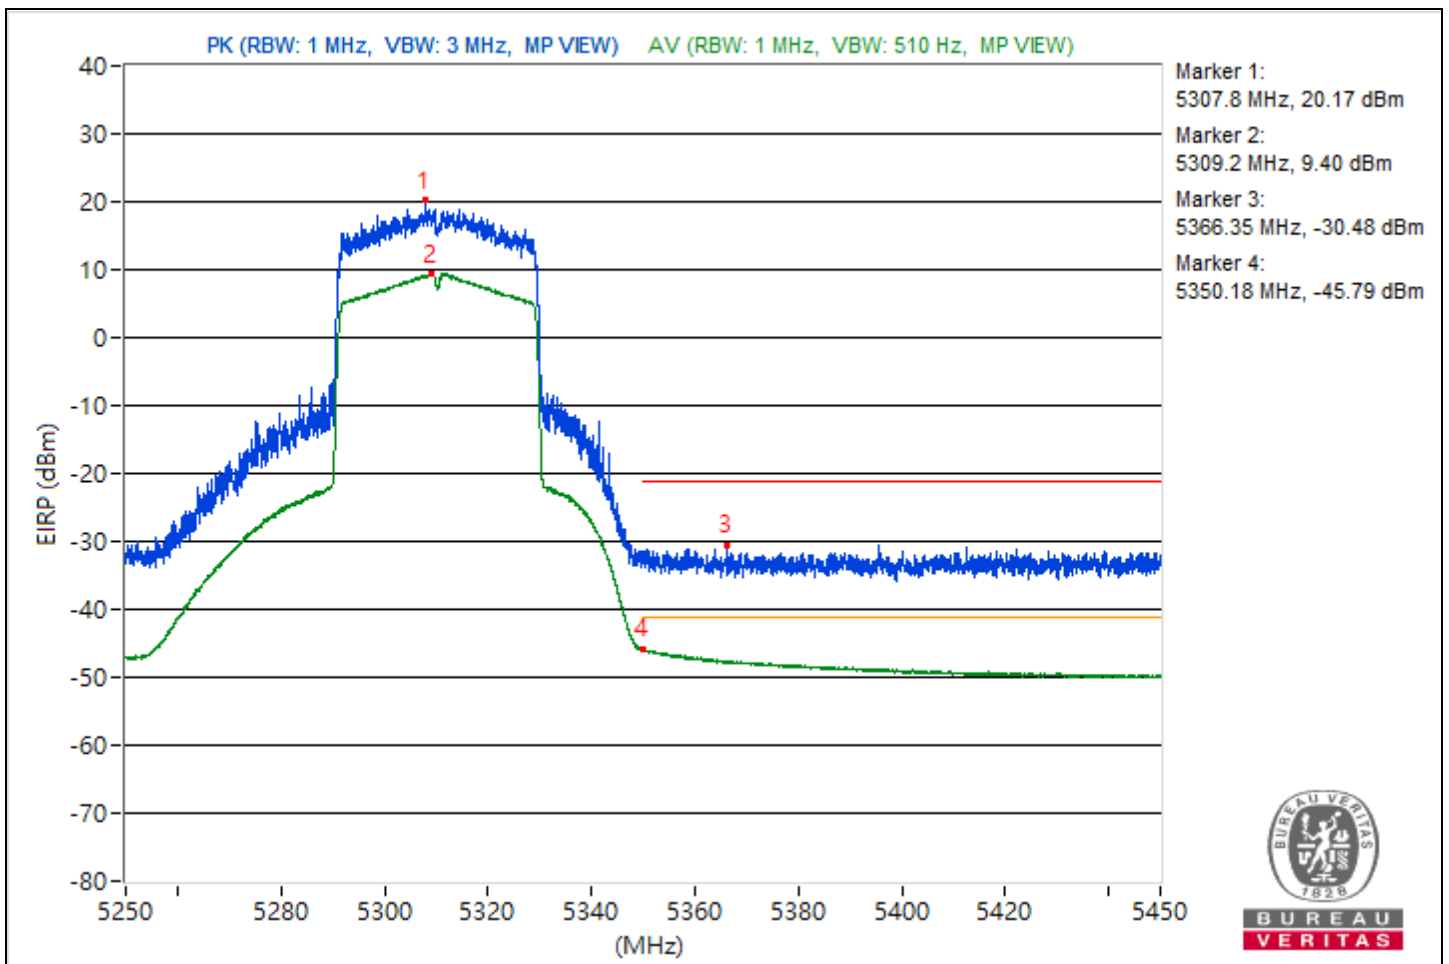


RF Mode	802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5508.19	115.13 PK			9.59	13.46	4.92	19.87
2	5365.75	64.63 PK	74	-9.37	-36.81	-41.52	4.92	-30.63
3	#5468.87	65.77 PK	68.26	-2.49	-36.36	-38.82	4.92	-29.49
4	*5509.28	105.01 AV			1.6	2.04	4.92	9.75
5	5459.44	47.86 AV	54	-6.14	-55.83	-54.89	4.92	-47.4

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

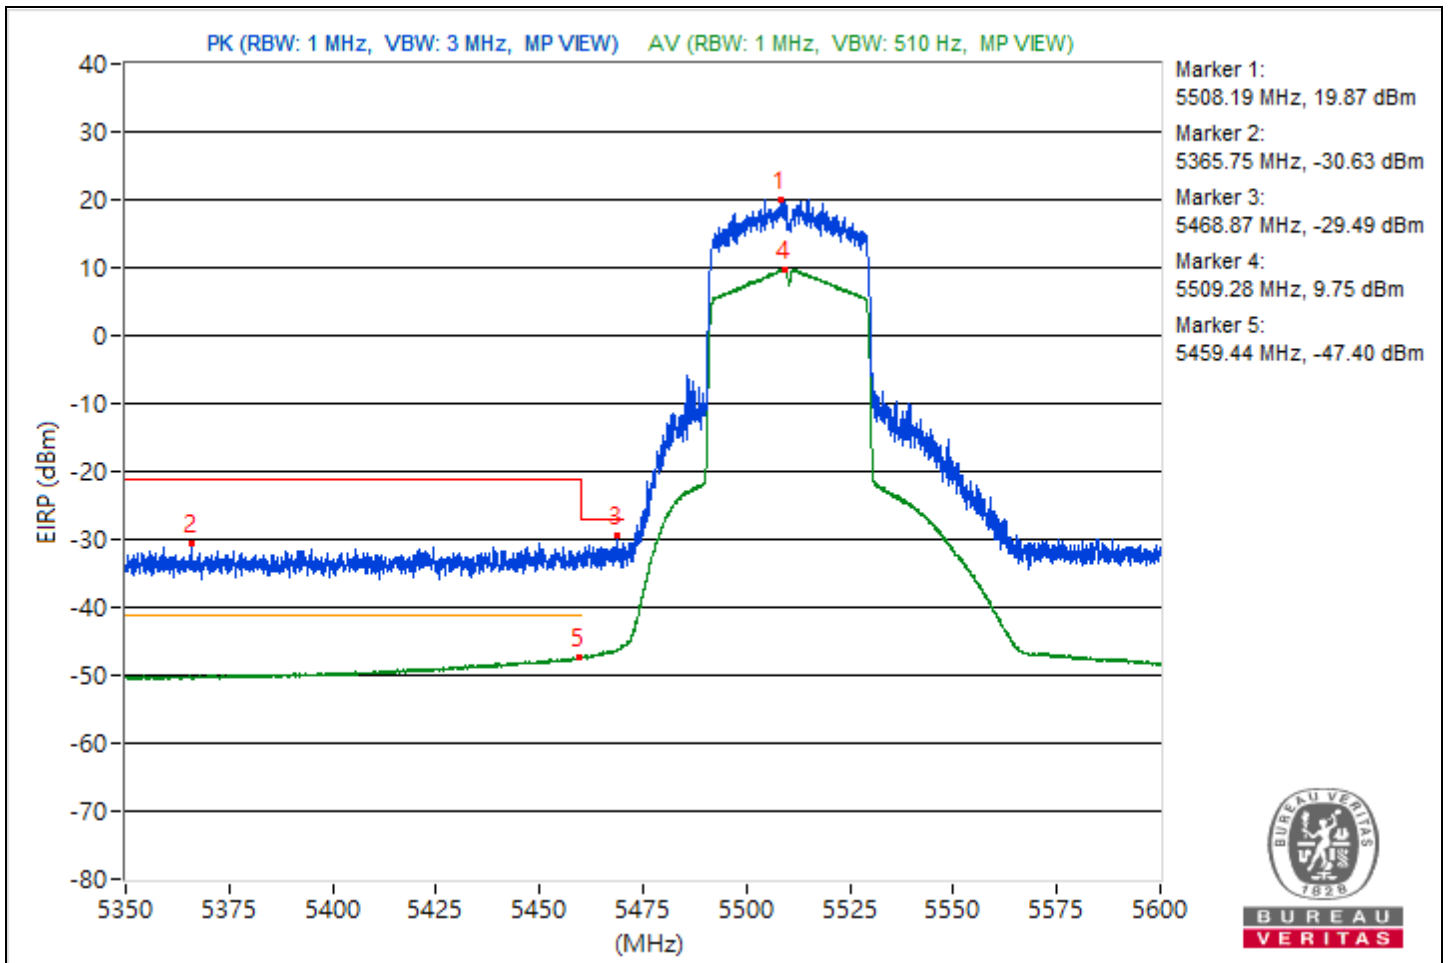


RF Mode	802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5552.41	117.83 PK			14.96	14.29	4.92	22.57
2	5458.91	64.97 PK	74	-9.03	-39.71	-37.11	4.92	-30.29
3	#5469.91	65.66 PK	68.26	-2.6	-36.66	-38.63	4.92	-29.6
4	*5549.34	106.89 AV			3.42	3.97	4.92	11.63
5	5459.59	50.72 AV	54	-3.28	-52.49	-52.45	4.92	-44.54

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

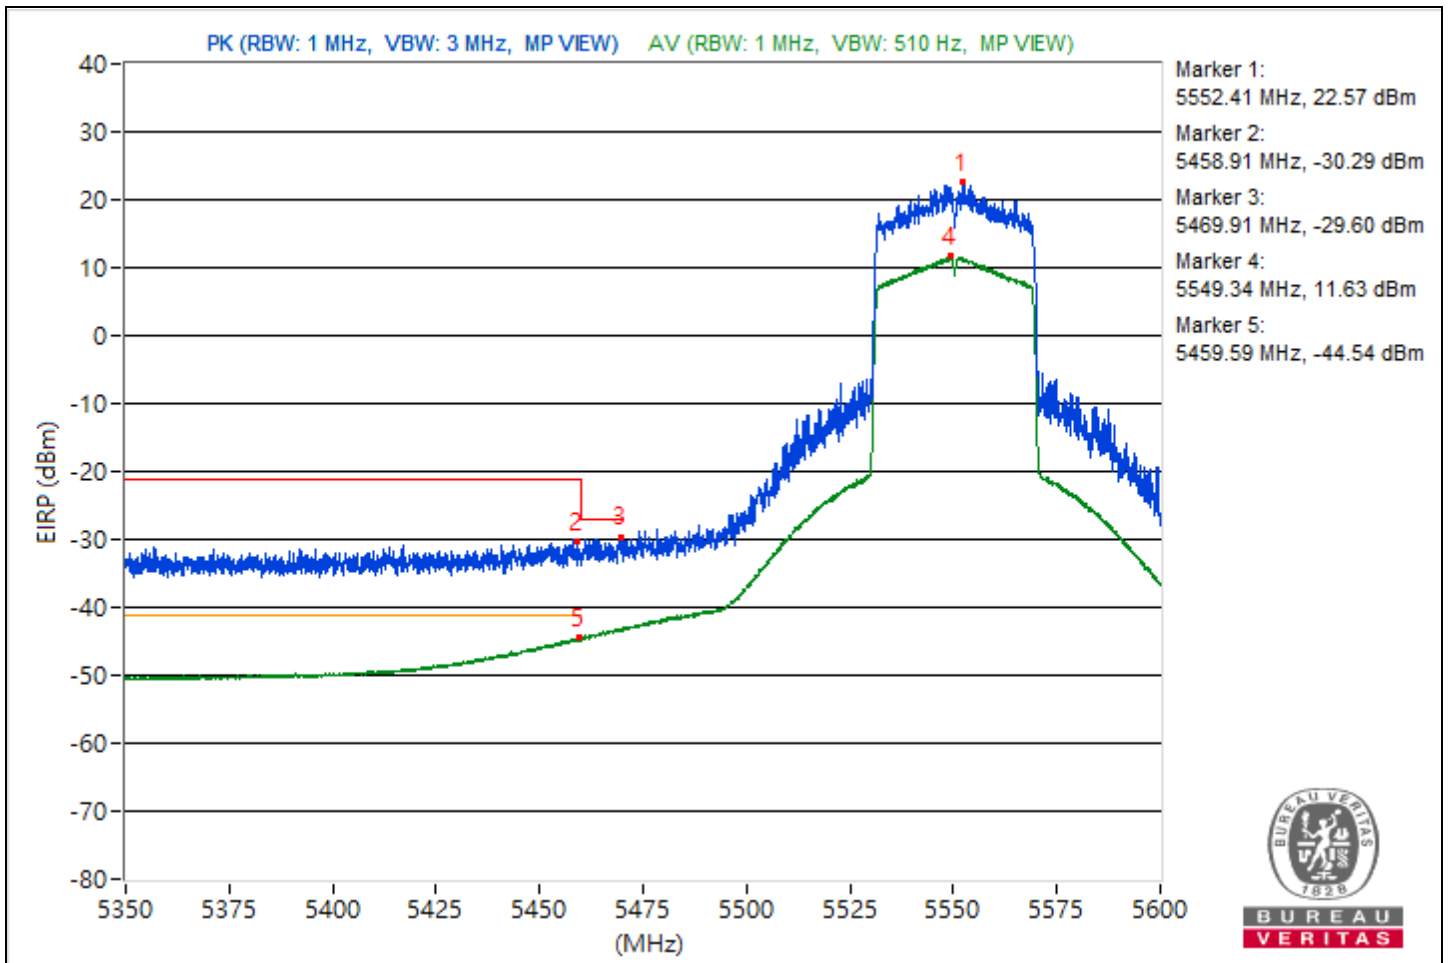


RF Mode	802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5672.07	117.87			12.03	16.32	4.92	22.61
2	#5727.3	65.49	68.26	-2.77	-41.66	-35.66	4.92	-29.77

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

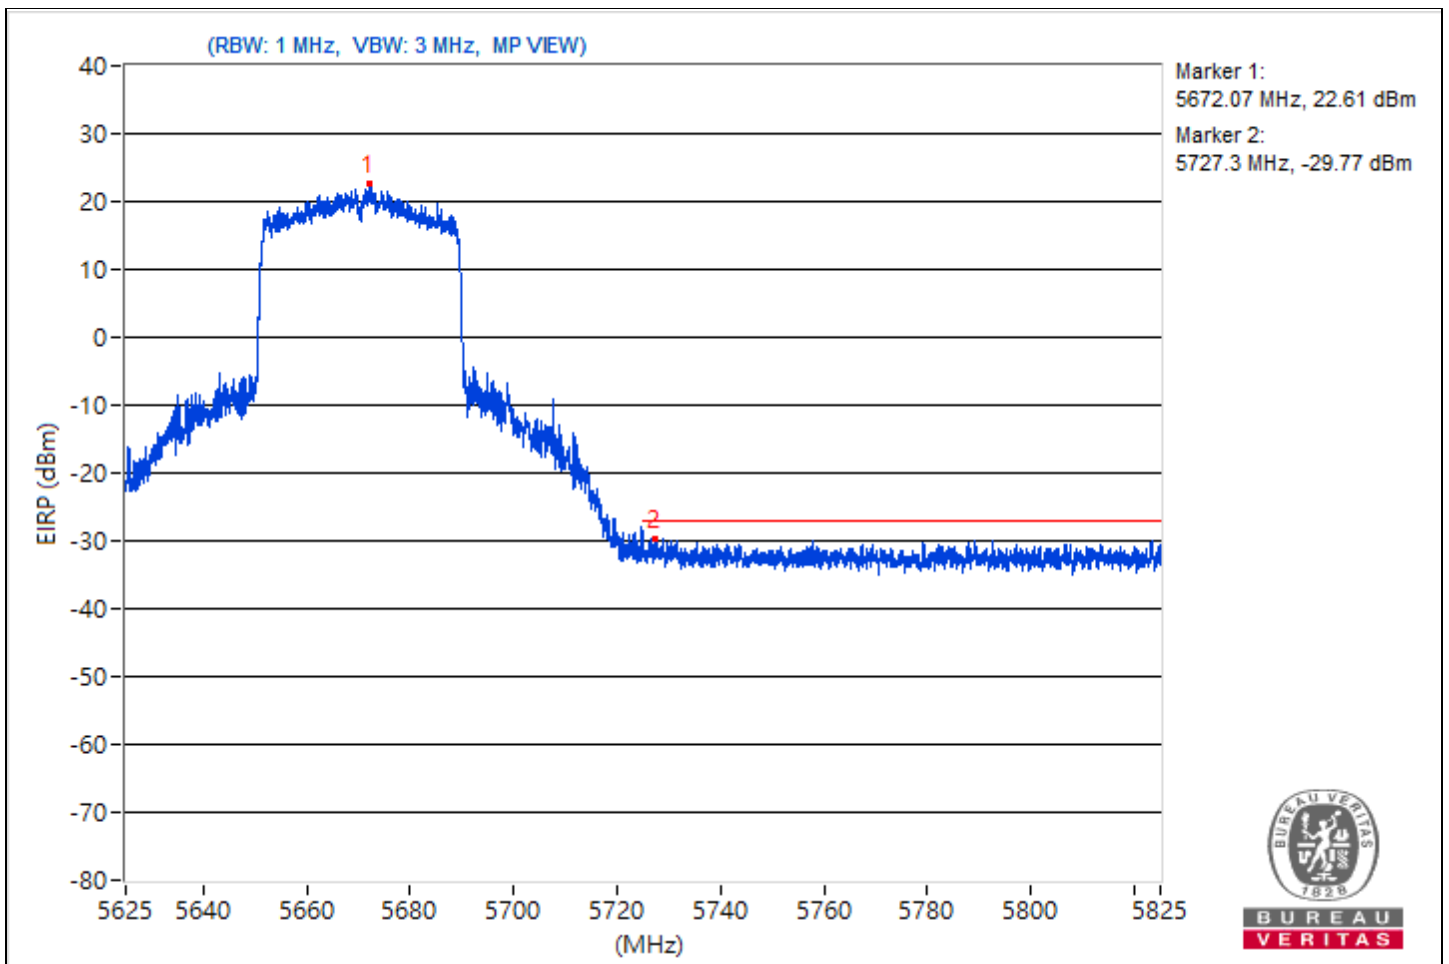


RF Mode	802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5715.64	116.87			14.71	12.33	4.92	21.61
2	#5873.7	65.57	68.26	-2.69	-36.08	-40.03	4.92	-29.69

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

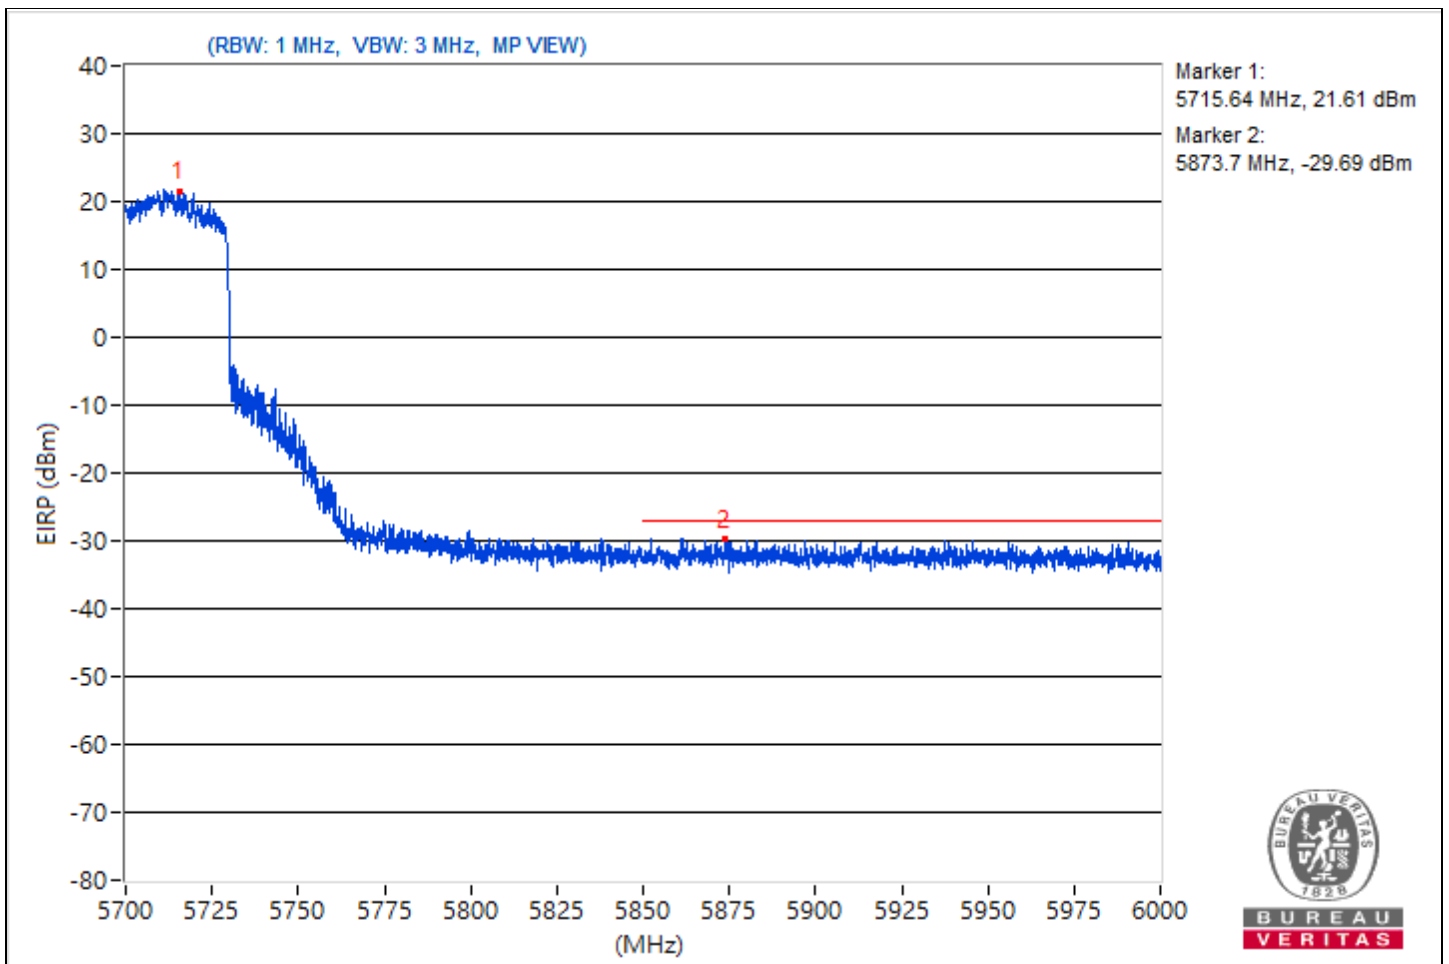


RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5750.21	121.44			20.09	15	4.92	26.18
2	#5638.11	68.07	68.26	-0.19	-37.25	-33.7	4.92	-27.19
3	#5656.64	70.06	73.17	-3.11	-35.4	-31.65	4.92	-25.2
4	#5719.81	96.4	110.81	-14.41	-8.94	-5.36	4.92	1.14
5	#5720.29	95.45	111.52	-16.07	-6.22	-10.08	4.92	0.19
6	#5854.83	68.7	111.24	-42.54	-34.58	-34.4	4.92	-26.56
7	#5872.05	70.03	106.09	-36.06	-37.13	-31.13	4.92	-25.23
8	#5924.54	60.2	68.6	-8.4	-42.45	-43.6	4.92	-35.06
9	#5925.37	59.66	68.26	-8.6	-45.94	-41.98	4.92	-35.6

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

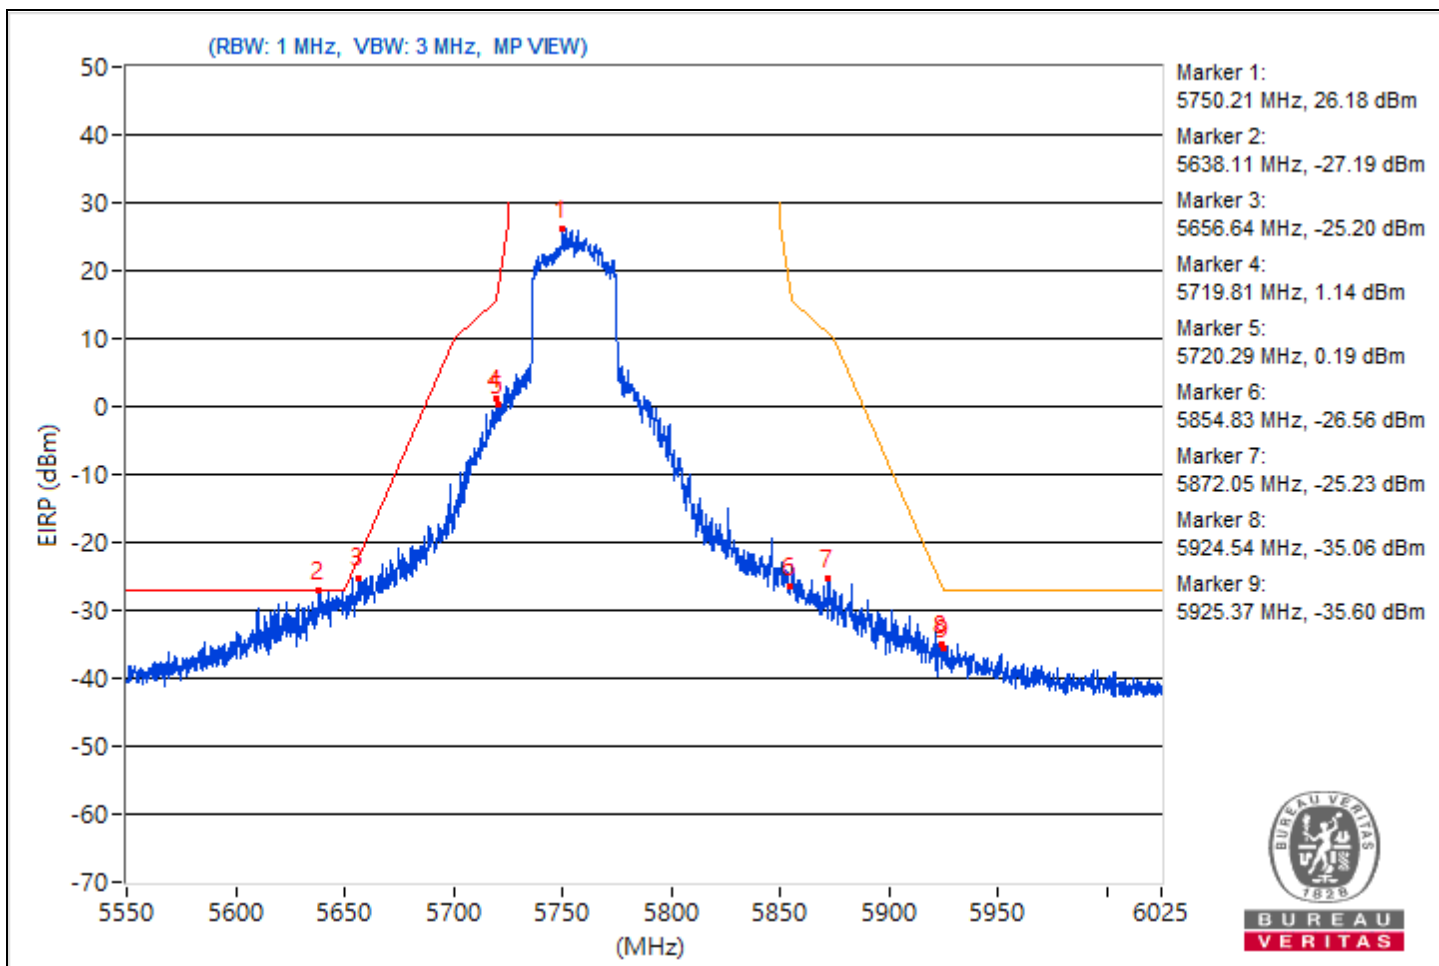




RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5797.24	120.6			18.54	15.89	4.92	25.34
2	#5649.04	62.2	68.26	-6.06	-44.15	-39.18	4.92	-33.06
3	#5656.04	64.09	72.73	-8.64	-42.76	-37.14	4.92	-31.17
4	#5716.49	74.7	109.88	-35.18	-26.85	-31.16	4.92	-20.56
5	#5720.05	73.53	110.97	-37.44	-27.63	-33.61	4.92	-21.73
6	#5852.81	80.65	115.85	-35.2	-21.99	-23.17	4.92	-14.61
7	#5865.64	77.97	107.88	-29.91	-23.48	-28.18	4.92	-17.29
8	#5923.71	66.24	69.22	-2.98	-35.51	-39.12	4.92	-29.02
9	#5928.93	65.98	68.26	-2.28	-40.76	-35.28	4.92	-29.28

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

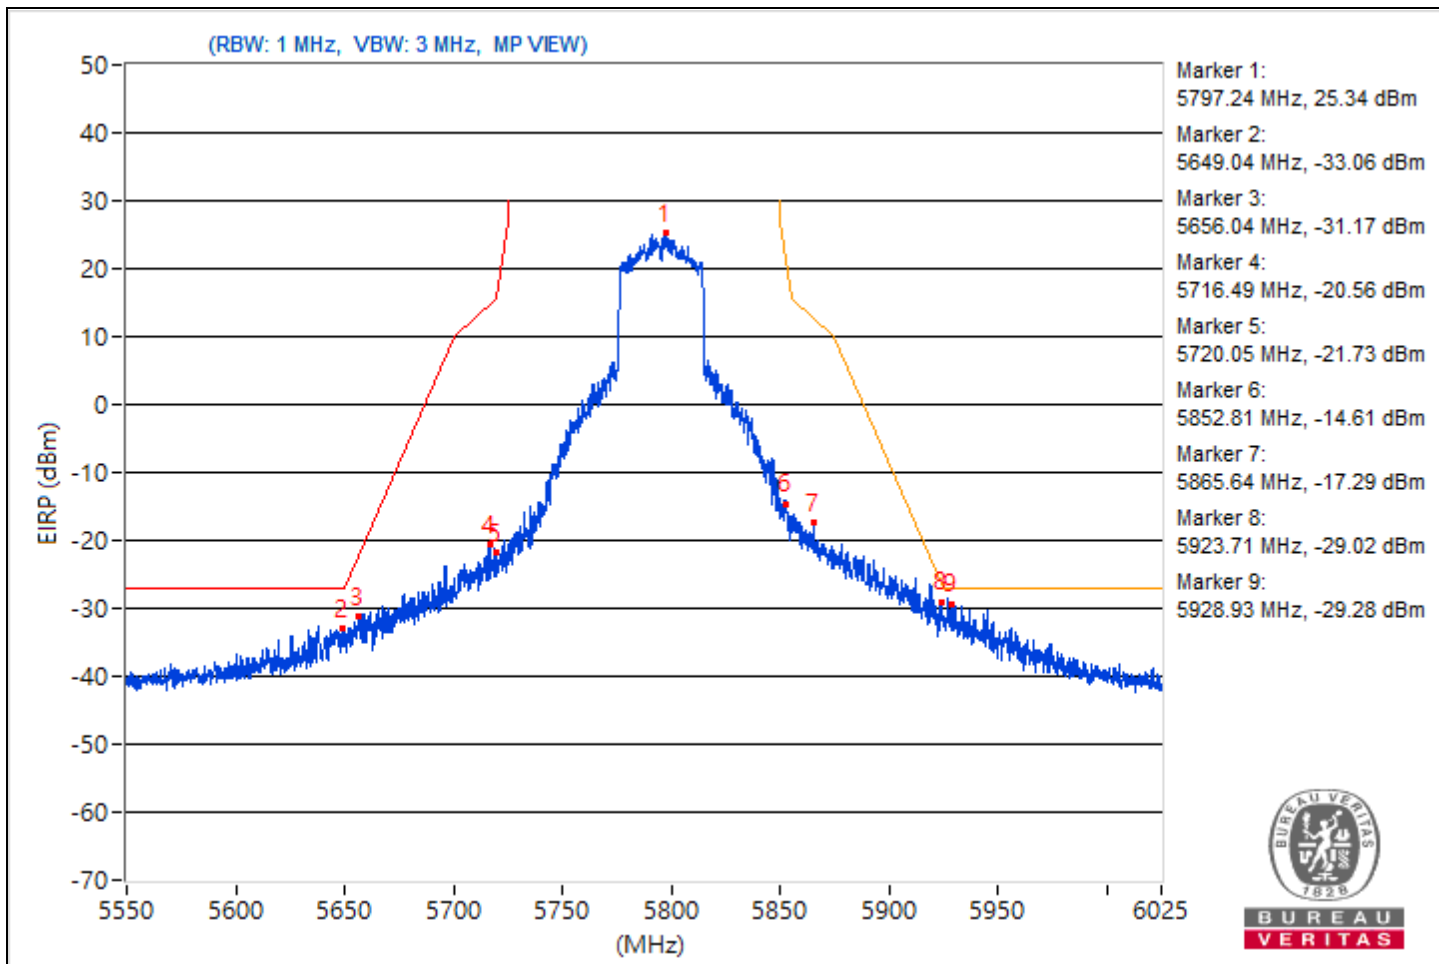


RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5208.82	111.79 PK			9.1	8.04	4.92	16.53
2	*5211.25	100.7 AV			-2.76	-2.23	4.92	5.44
3	5141.4	67.79 PK	74	-6.21	-36.67	-34.42	4.92	-27.47
4	5145.62	49.16 AV	54	-4.84	-54.94	-53.28	4.92	-46.1

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

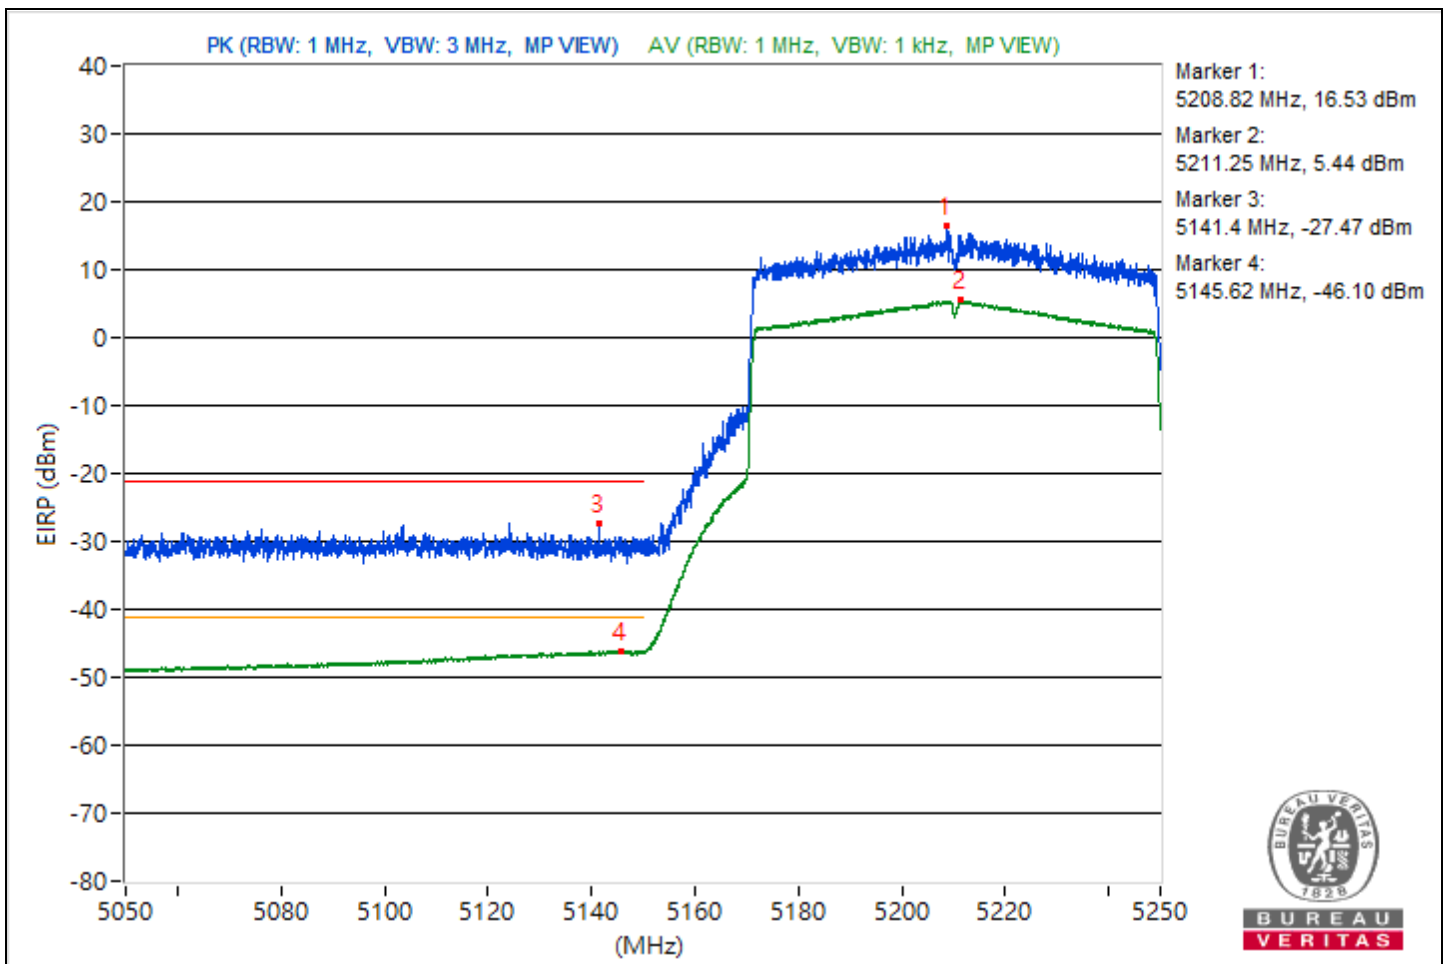


RF Mode	802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5289.52	110.55 PK			6.03	8.38	4.92	15.29
2	*5291.75	100.6 AV			-2.39	-2.8	4.92	5.34
3	5422.15	64.04 PK	74	-9.96	-41.82	-37.52	4.92	-31.22
4	5350	49.9 AV	54	-4.1	-53.29	-53.29	4.92	-45.36

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

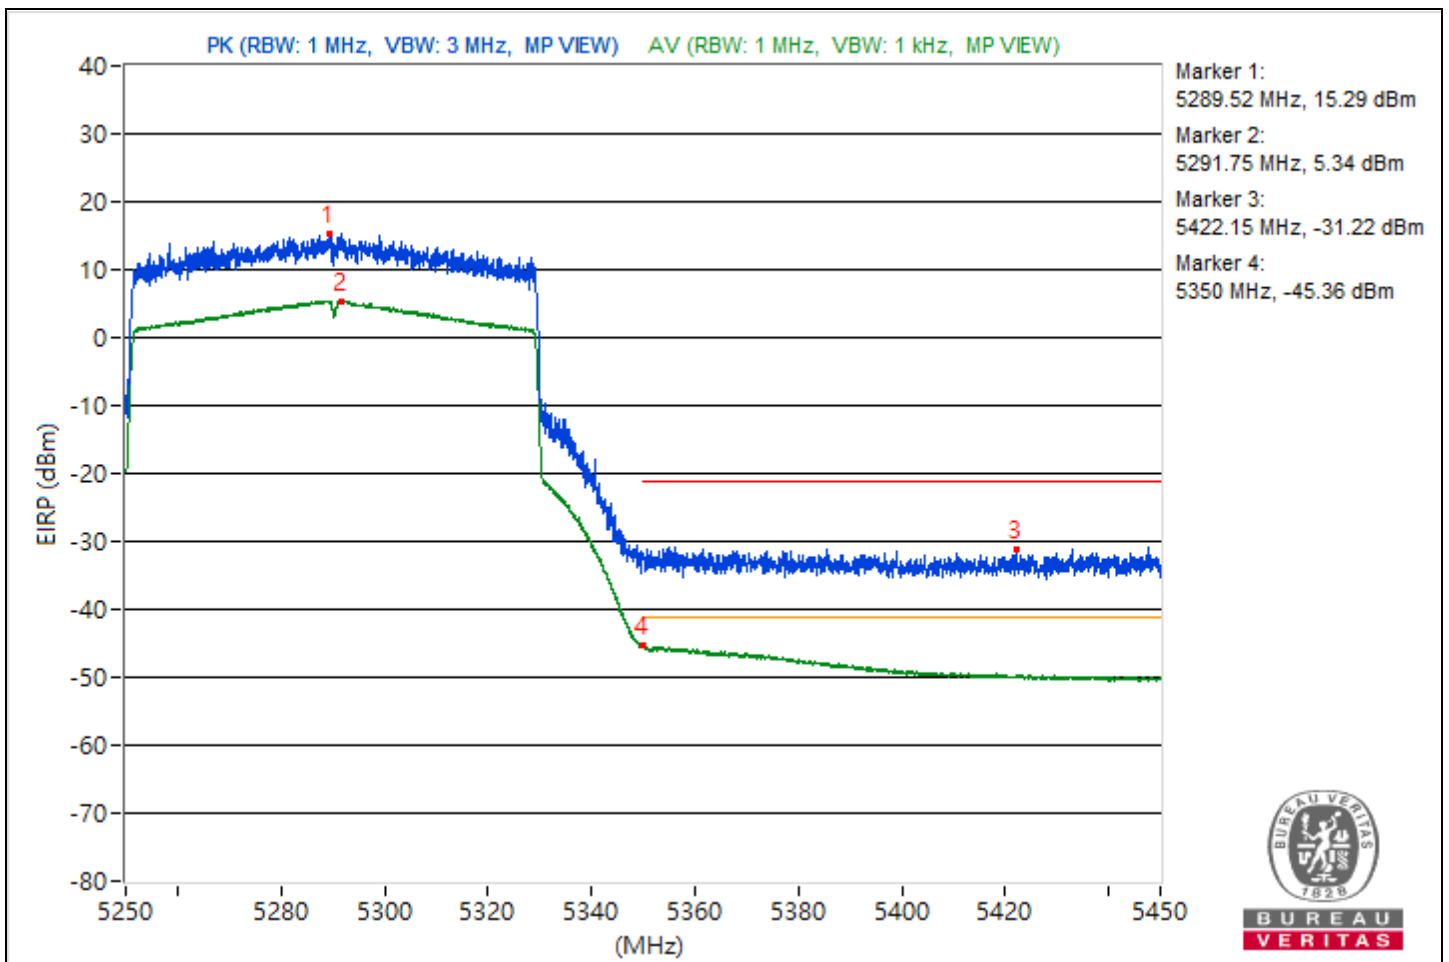


RF Mode	802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5534.97	111.91 PK			10.05	6.77	4.92	16.65
2	5411.34	64.38 PK	74	-9.62	-40.53	-37.58	4.92	-30.88
3	#5468.69	63.98 PK	68.26	-4.28	-38.04	-40.81	4.92	-31.28
4	*5529.12	101.48 AV			-1.82	-1.61	4.92	6.22
5	5459.53	47.5 AV	54	-6.5	-55.63	-55.75	4.92	-47.76

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

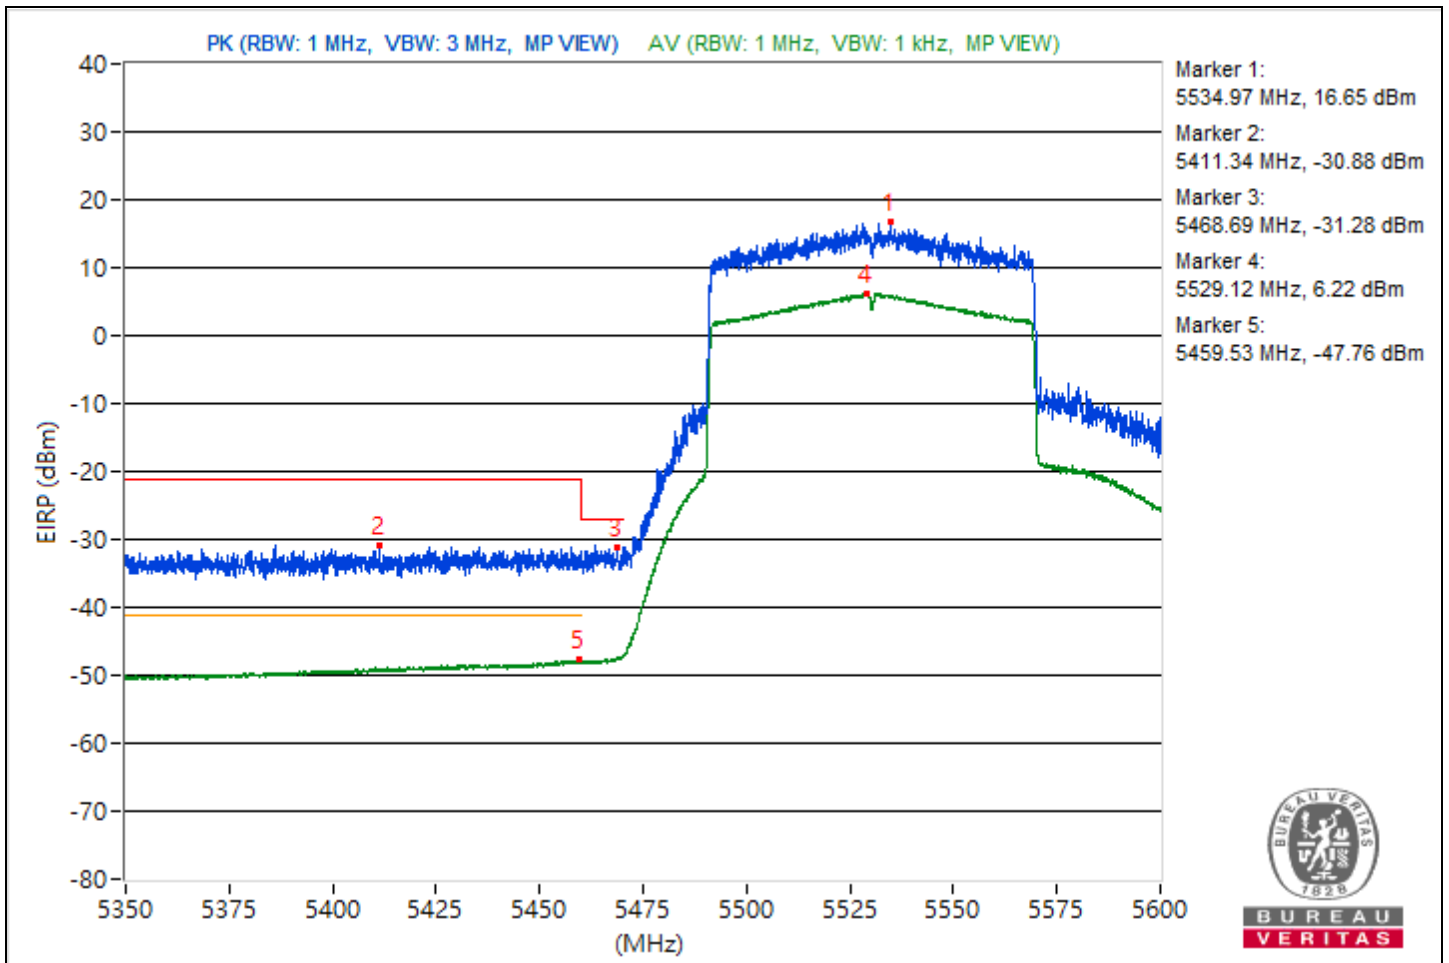


RF Mode	802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5597.41	113.19 PK			11.26	8.23	4.92	17.93
2	5449.72	64.4 PK	74	-9.6	-37.36	-40.95	4.92	-30.86
3	#5465.09	65.07 PK	68.26	-3.19	-37.12	-39.42	4.92	-30.19
4	*5599.62	103.13 AV			-0.34	0.2	4.92	7.87
5	5457.25	49.75 AV	54	-4.25	-54.51	-52.59	4.92	-45.51

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

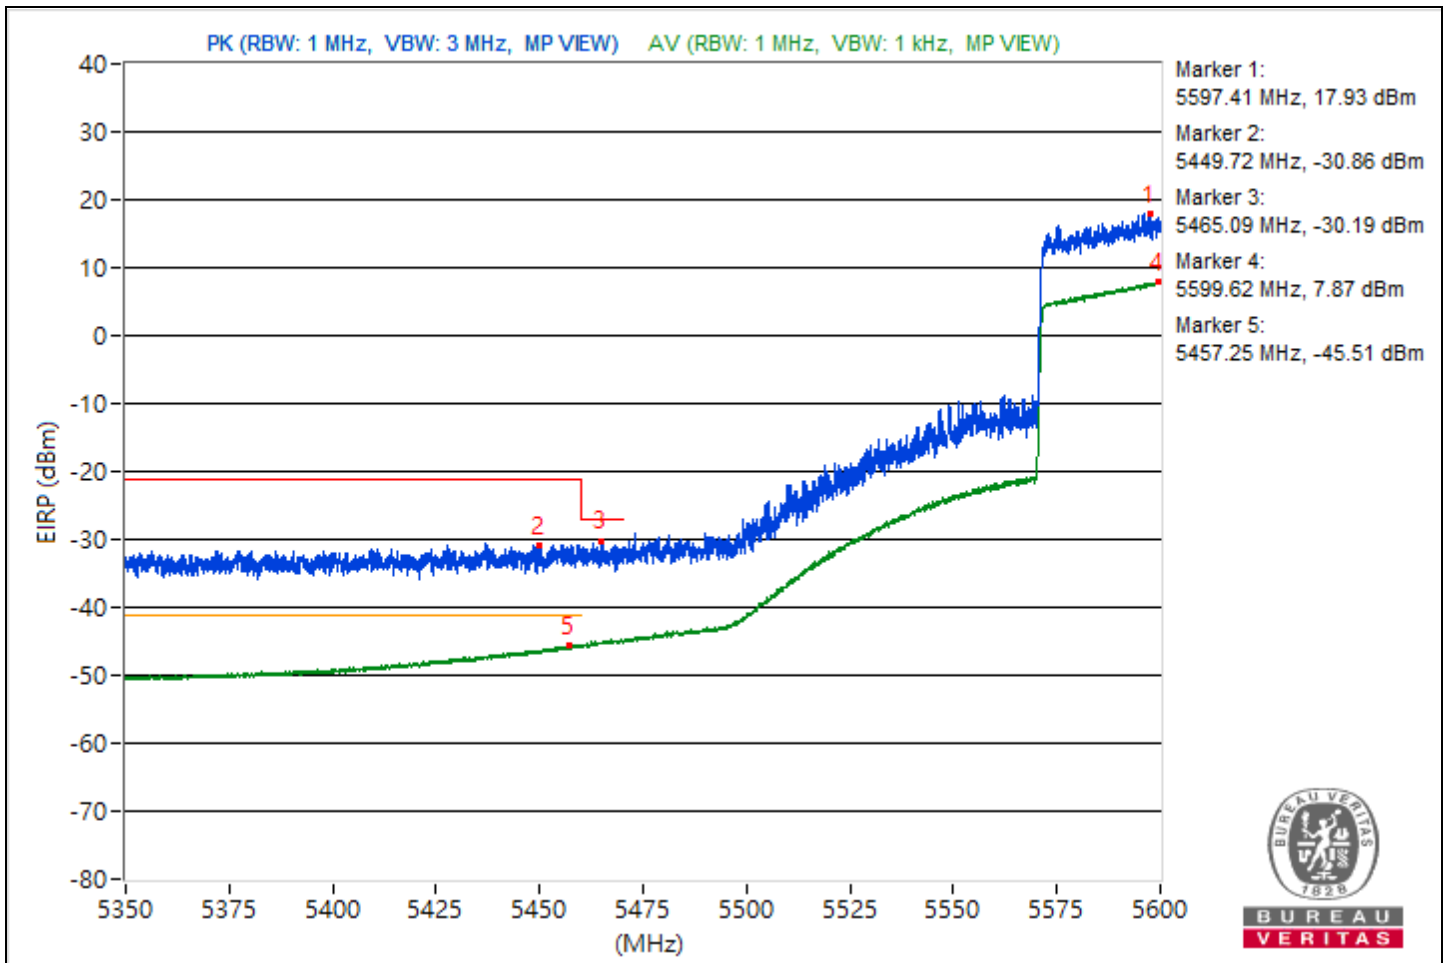


RF Mode	802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5700.56	114.13			12.05	9.46	4.92	18.87
2	#5860.27	65.67	68.26	-2.59	-40.79	-35.68	4.92	-29.59

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

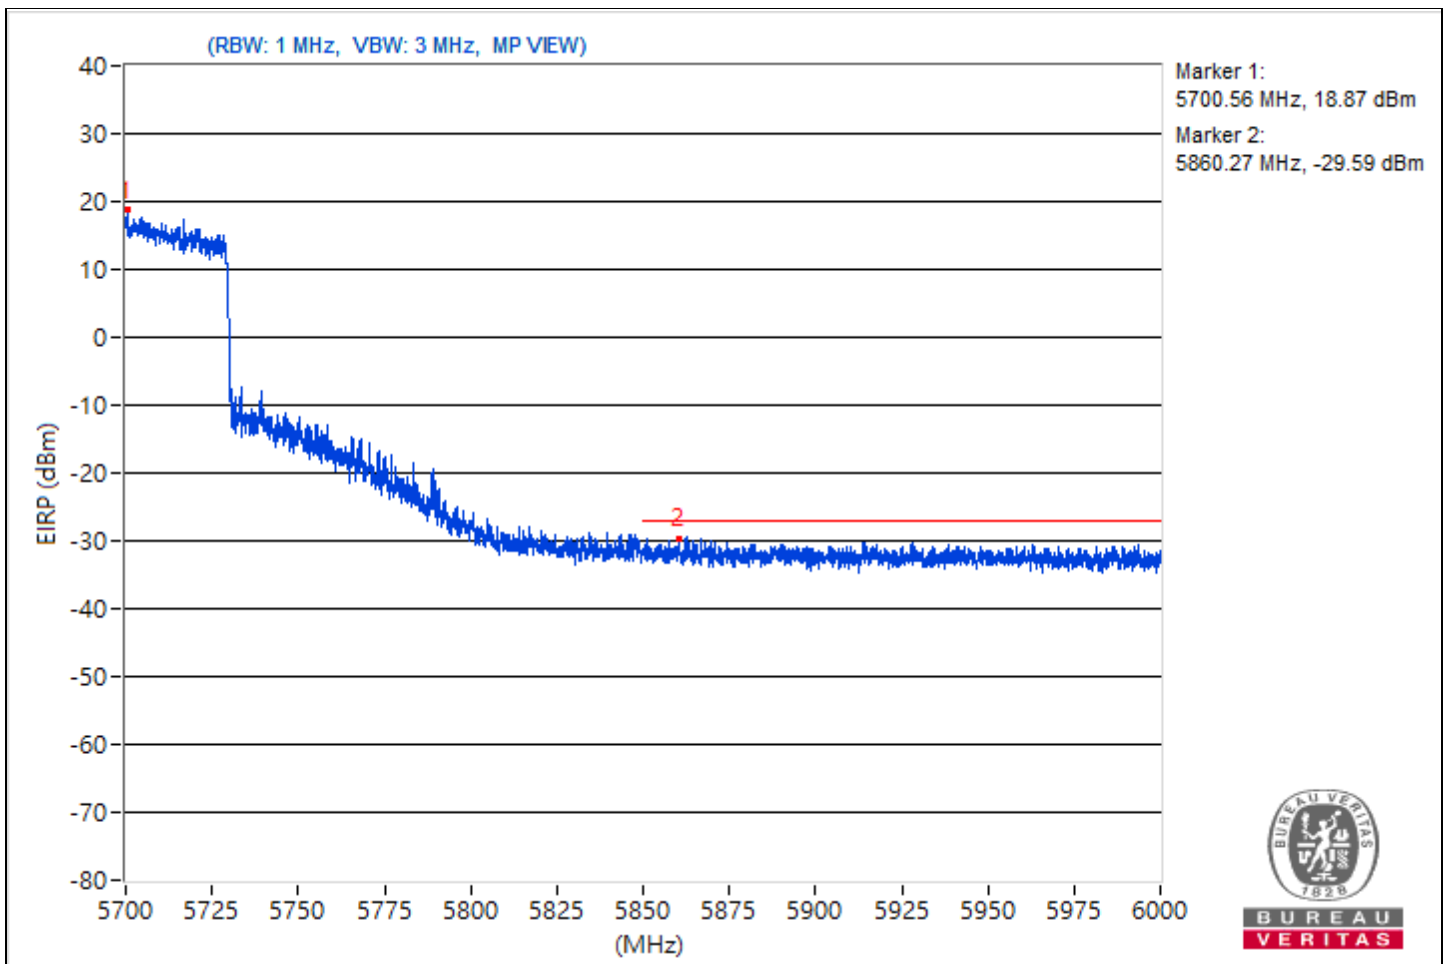


RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5773.13	115.13			10.59	12.96	4.92	19.87
2	#5633.72	64.06	68.26	-4.2	-37.21	-42.65	4.92	-31.2
3	#5654.86	66.11	71.85	-5.74	-41.32	-34.98	4.92	-29.15
4	#5719.46	86.45	110.71	-24.26	-20.04	-14.89	4.92	-8.81
5	#5720.05	85.16	110.97	-25.81	-17.43	-18.72	4.92	-10.1
6	#5854.83	77.97	111.24	-33.27	-24.79	-25.7	4.92	-17.29
7	#5856.02	80.8	110.57	-29.77	-20.4	-26.13	4.92	-14.46
8	#5924.66	64.06	68.51	-4.45	-41.56	-37.58	4.92	-31.2
9	#5944.37	63.82	68.26	-4.44	-38.79	-40.05	4.92	-31.44

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

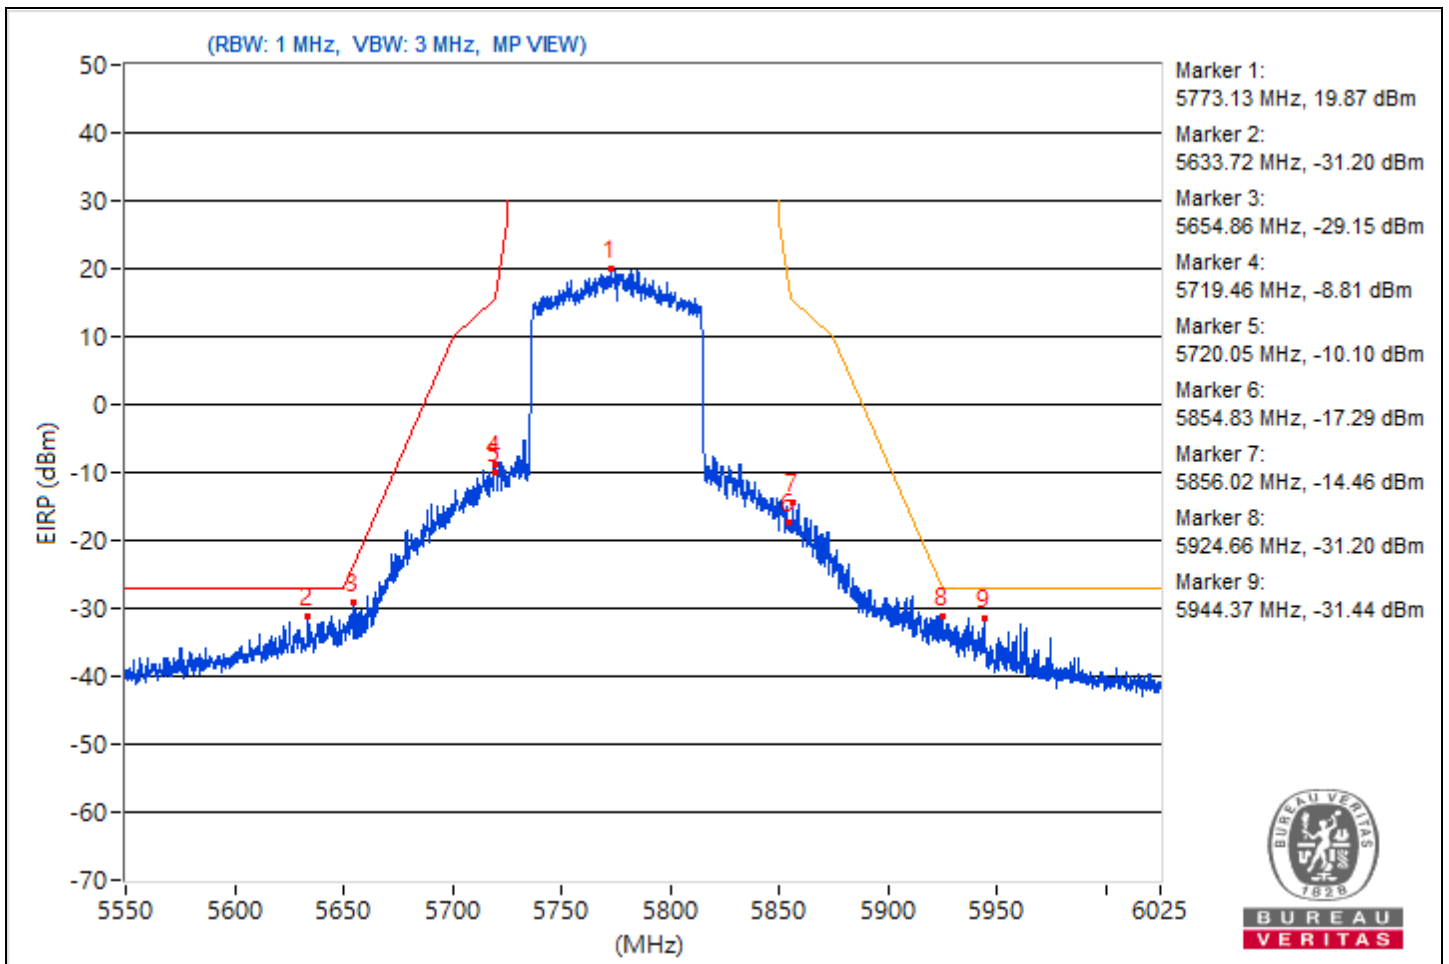


RF Mode	802.11ax (HE160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5232.15	105.98 PK			0.64	4.22	4.92	10.72
2	*5248.05	96.18 AV			-7.22	-6.81	4.92	0.92
3	5114.37	67.4 PK	74	-6.6	-34.41	-37.81	4.92	-27.86
4	5142.7	49.98 AV	54	-4.02	-53.67	-52.79	4.92	-45.28

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

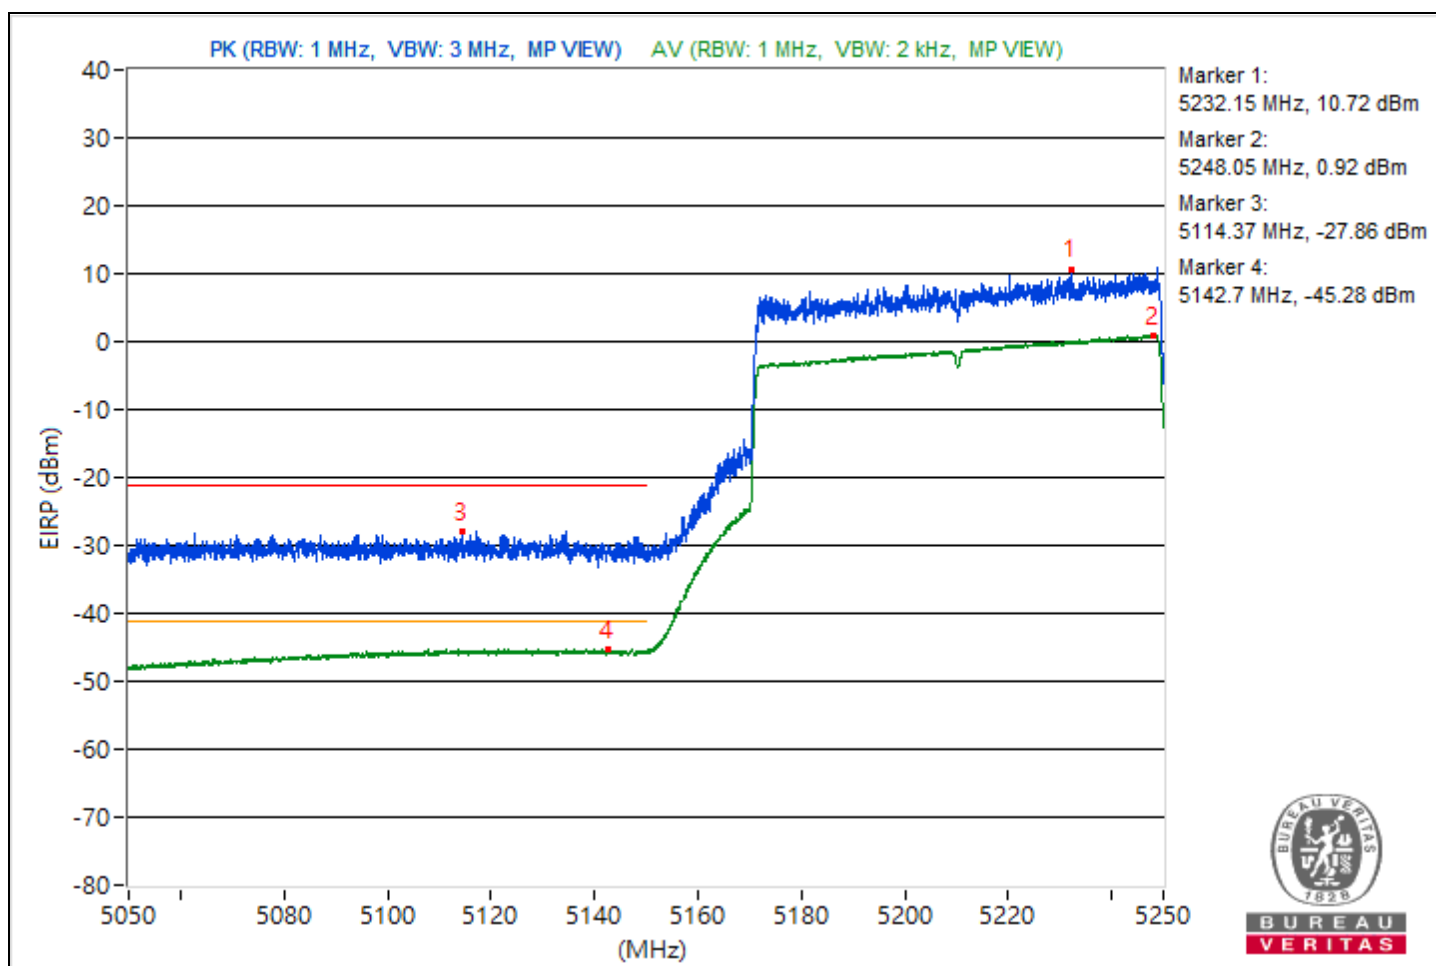




RF Mode	802.11ax (HE160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5261.23	106.11 PK			0.19	4.58	4.92	10.85
2	*5253.5	95.98 AV			-7.08	-7.35	4.92	0.72
3	5424.7	64.88 PK	74	-9.12	-40.04	-37.08	4.92	-30.38
4	5359.05	50.38 AV	54	-3.62	-52.42	-53.24	4.92	-44.88

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

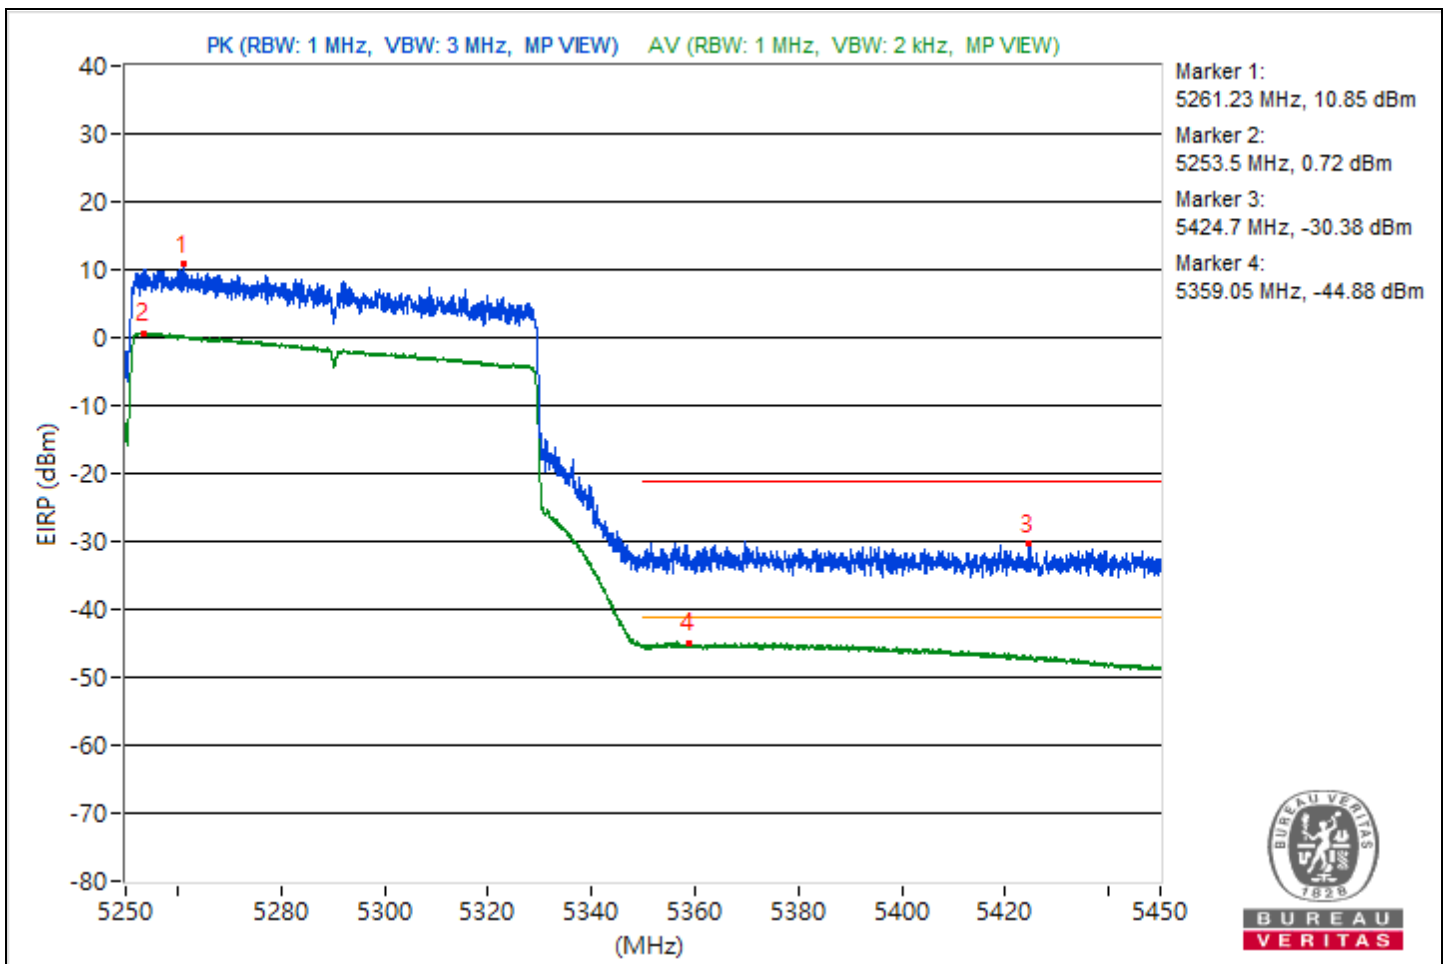


RF Mode	802.11ax (HE160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5568.25	106.82 PK			0.8	5.32	4.92	11.56
2	5379.41	64.31 PK	74	-9.69	-37.15	-41.8	4.92	-30.95
3	#5465.34	63.97 PK	68.26	-4.29	-37.85	-41.25	4.92	-31.29
4	*5568.31	97.86 AV			-5.42	-5.24	4.92	2.6
5	5456.09	49.42 AV	54	-4.58	-53.05	-54.64	4.92	-45.84

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

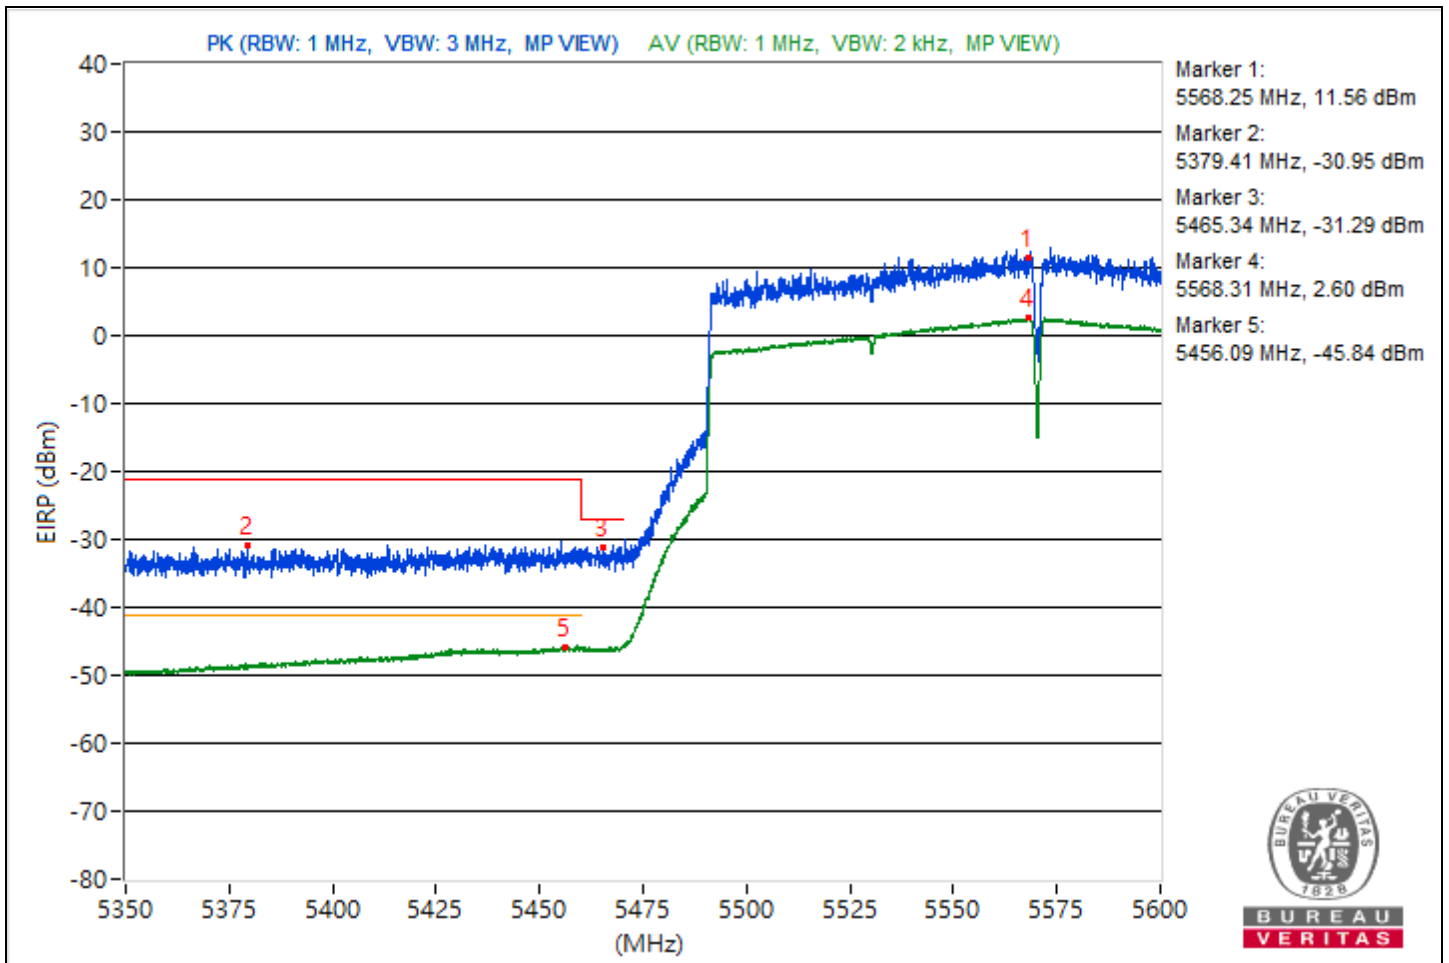


RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5180.87	118.54 PK			16.59	13.61	4.92	23.28
2	*5179.48	109.13 AV			6.07	5.8	4.92	13.87
3	5103.68	66.7 PK	74	-7.3	-35.19	-38.36	4.92	-28.56
4	5149.8	49.51 AV	54	-4.49	-53.87	-53.49	4.92	-45.75

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

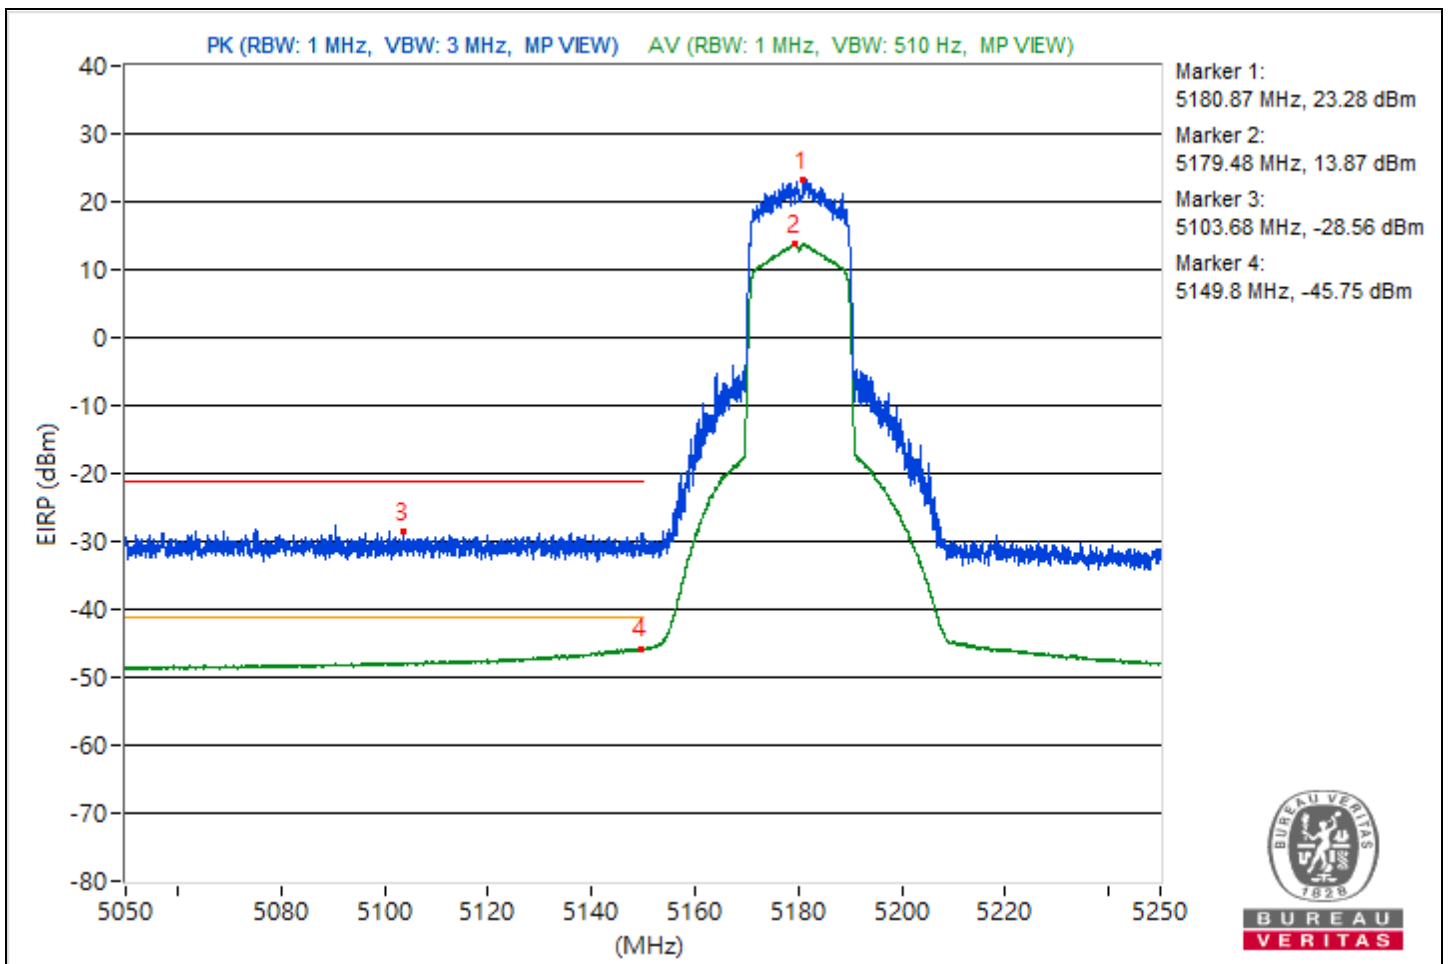


RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5200.45	117.98 PK			15.84	13.39	4.92	22.72
2	*5199.6	109.14 AV			5.89	6.01	4.92	13.88
3	5119.27	67.37 PK	74	-6.63	-34.32	-38.11	4.92	-27.89
4	5149.43	48.27 AV	54	-5.73	-55.02	-54.82	4.92	-46.99

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

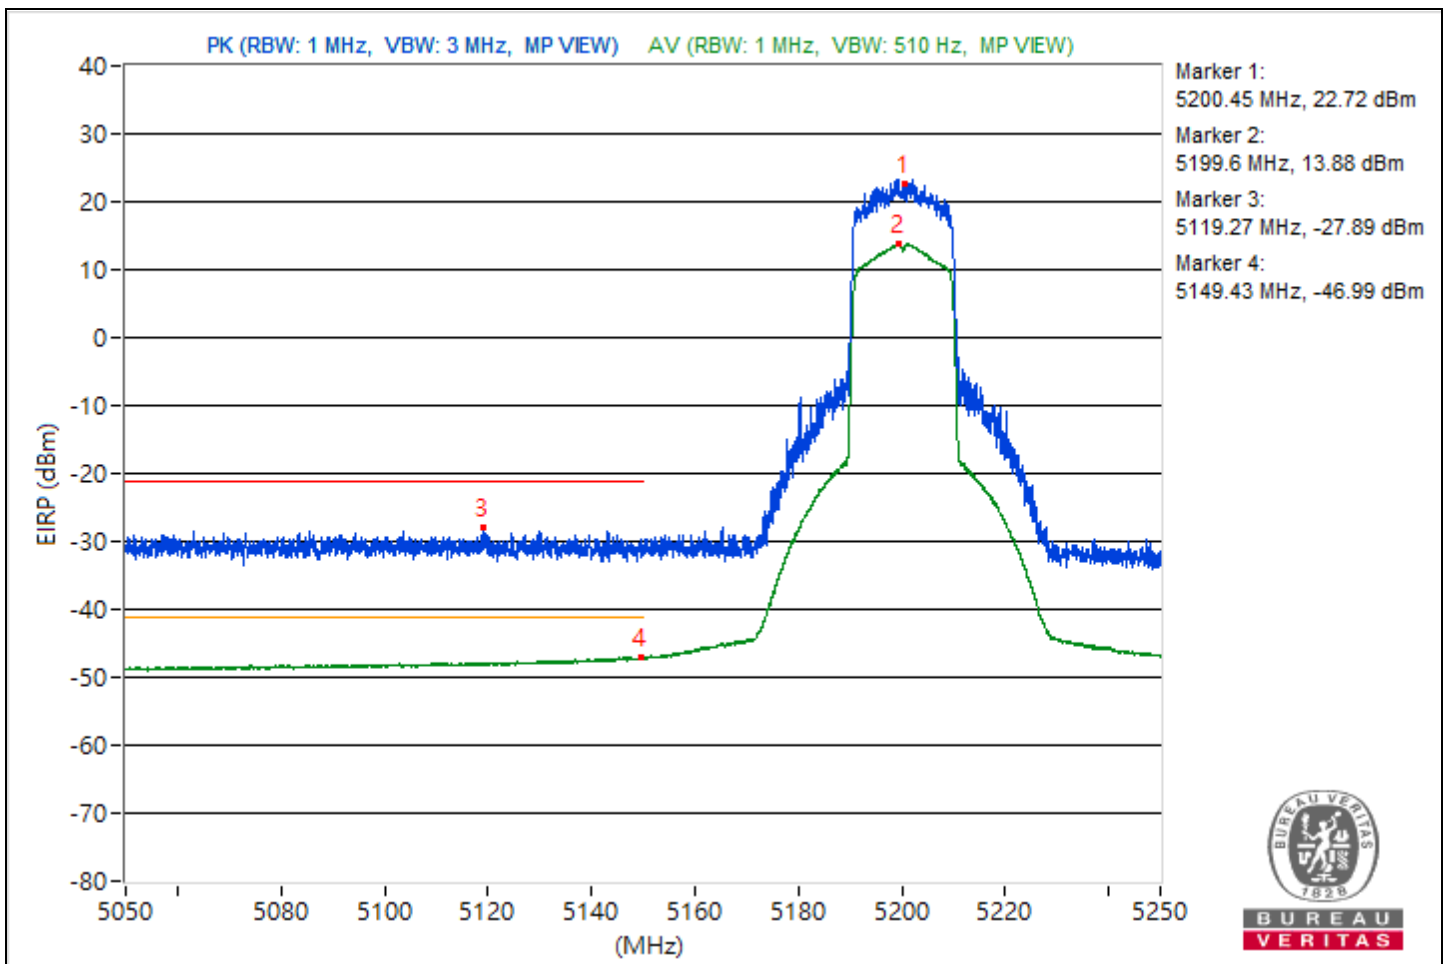


RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5236.12	117.81 PK			12.5	16.03	4.92	22.55
2	*5239.35	109.2 AV			5.94	6.07	4.92	13.94
3	5084.12	66.78 PK	74	-7.22	-38.63	-34.94	4.92	-28.48
4	5149.18	47.41 AV	54	-6.59	-55.89	-55.68	4.92	-47.85

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

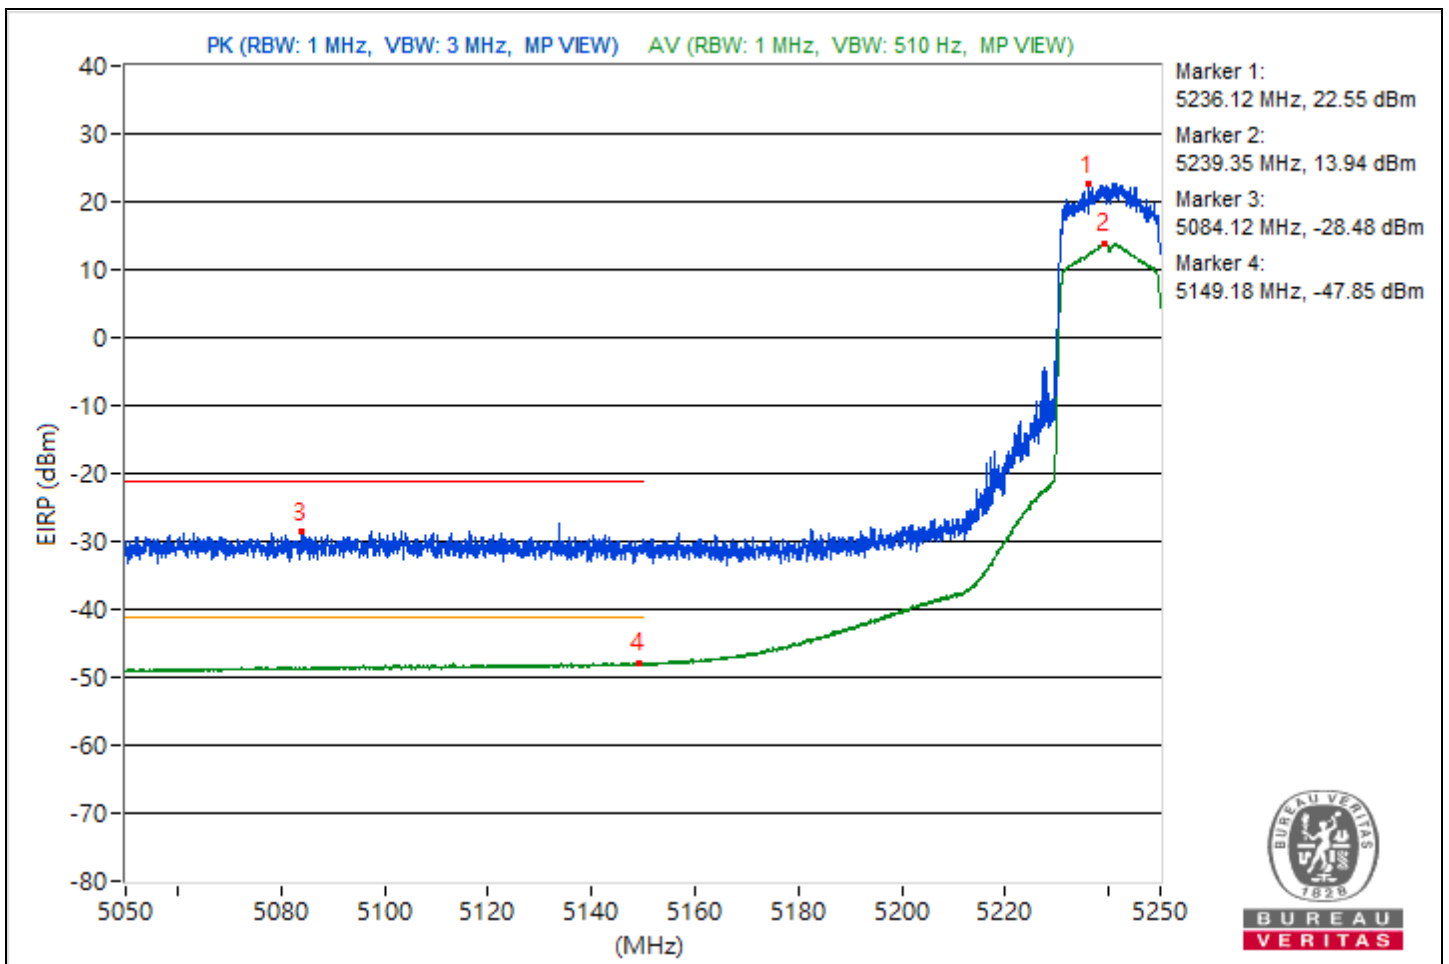


RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5746.89	122.46			19.81	18.64	4.92	27.2
2	#5644.76	59.35	68.26	-8.91	-45.48	-42.65	4.92	-35.91
3	#5650.23	58.4	68.43	-10.03	-43.89	-45.93	4.92	-36.86
4	#5719.81	88.01	110.81	-22.8	-16.51	-14.16	4.92	-7.25
5	#5720.52	89	112.06	-23.06	-17.13	-12.45	4.92	-6.26
6	#5854.83	57.75	111.24	-53.49	-46	-44.95	4.92	-37.51
7	#5867.66	58.14	107.32	-49.18	-43.75	-46.91	4.92	-37.12
8	#5924.54	55.7	68.6	-12.9	-46.37	-49.01	4.92	-39.56
9	#5946.62	56.95	68.26	-11.31	-45.78	-46.75	4.92	-38.31

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

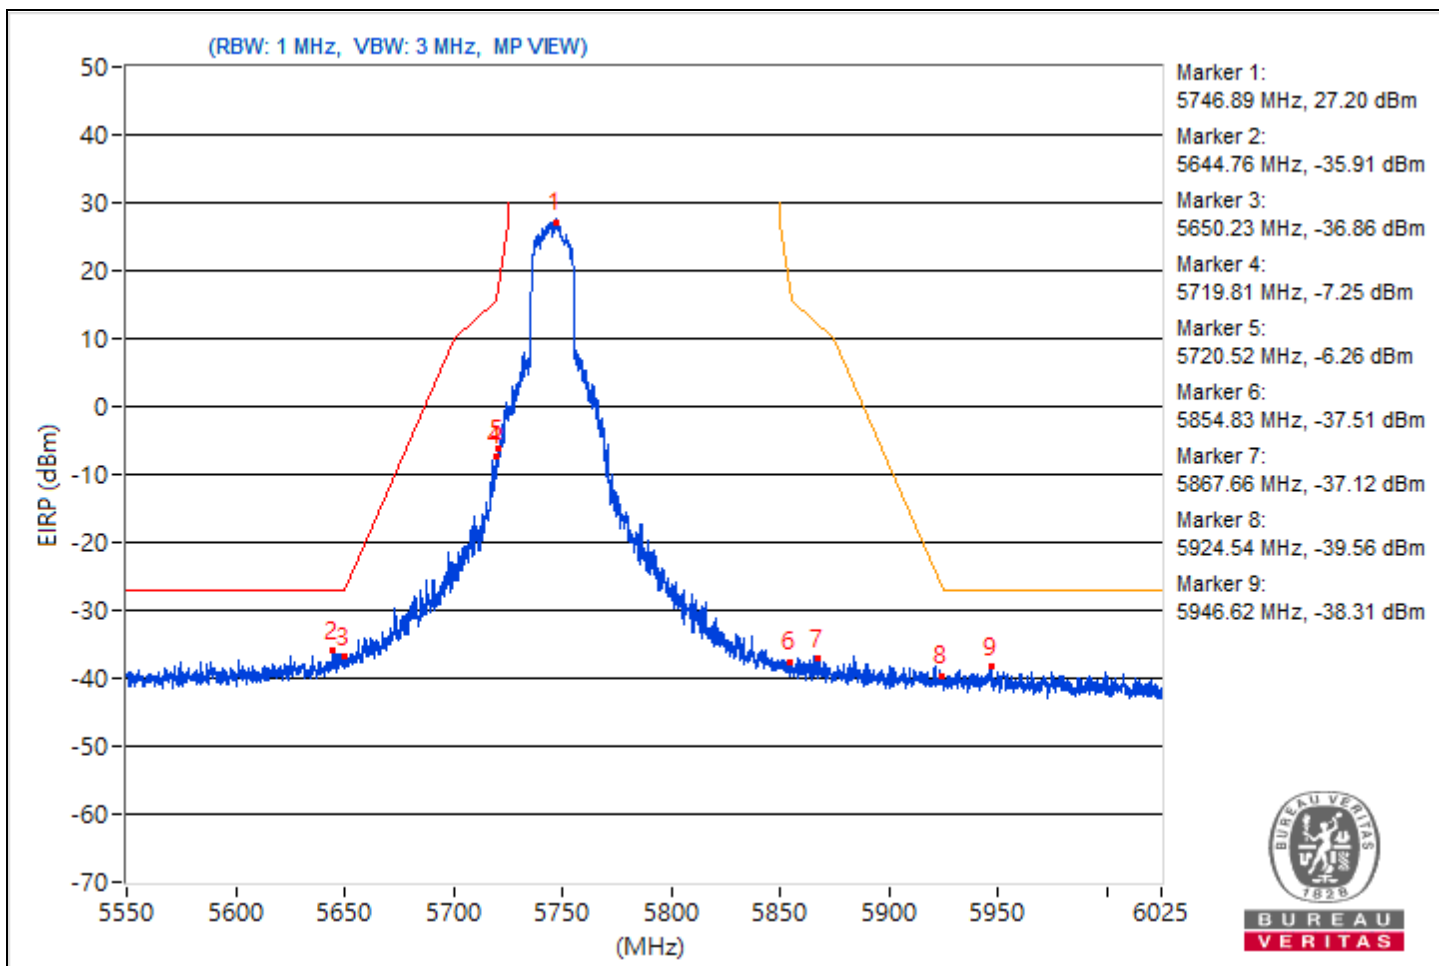


RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5788.57	122.78			18.41	20.52	4.92	27.52
2	#5596.19	57.47	68.26	-10.79	-46.32	-45.19	4.92	-37.79
3	#5651.89	57.82	69.66	-11.84	-48.81	-43.47	4.92	-37.44
4	#5719.81	65.71	110.81	-45.1	-36.14	-39.43	4.92	-29.55
5	#5720.52	63.89	112.06	-48.17	-40.06	-38.66	4.92	-31.37
6	#5854.59	65.68	111.79	-46.11	-41.49	-35.46	4.92	-29.58
7	#5865.16	62.15	108.01	-45.86	-42.43	-40	4.92	-33.11
8	#5923.59	55.44	69.31	-13.87	-48.47	-47.14	4.92	-39.82
9	#5928.1	57.11	68.26	-11.15	-48.61	-44.5	4.92	-38.15

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

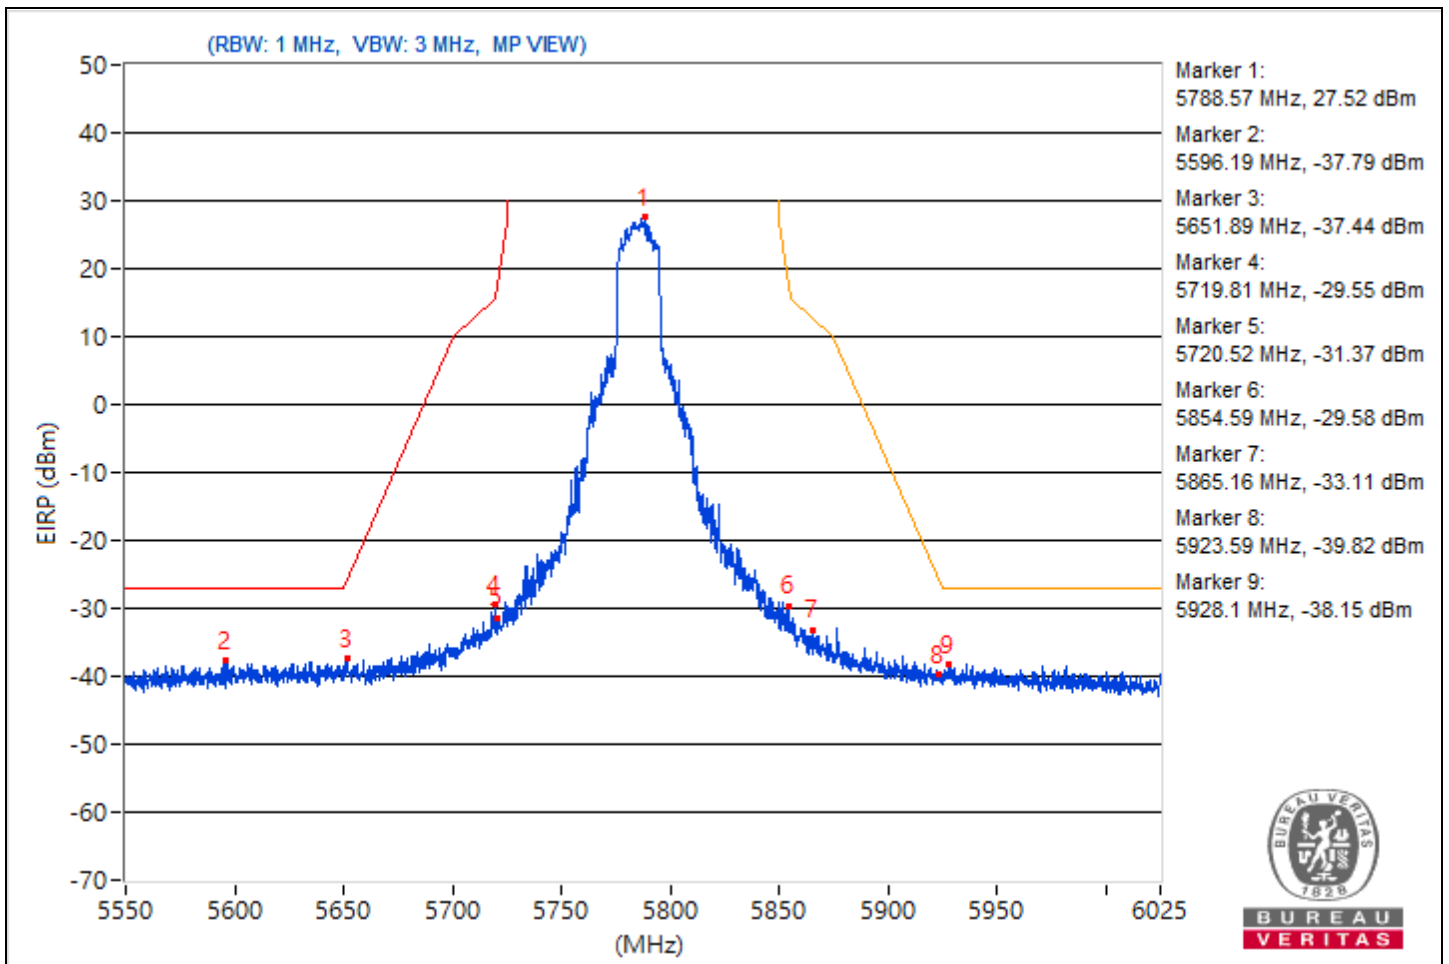


RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5825.98	122.74			20.33	18.6	4.92	27.48
2	#5587.29	56.75	68.26	-11.51	-48.03	-45.27	4.92	-38.51
3	#5651.18	56.38	69.13	-12.75	-47.6	-46.15	4.92	-38.88
4	#5704.73	57.7	106.58	-48.88	-44.44	-46.88	4.92	-37.56
5	#5720.52	57.27	112.06	-54.79	-46.4	-45.48	4.92	-37.99
6	#5852.81	84.72	115.85	-31.13	-20.24	-17.21	4.92	-10.54
7	#5862.43	79.12	108.78	-29.66	-29.4	-21.75	4.92	-16.14
8	#5921.93	60.56	70.54	-9.98	-41.07	-45.08	4.92	-34.7
9	#5925.49	58.1	68.26	-10.16	-46.81	-43.86	4.92	-37.16

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

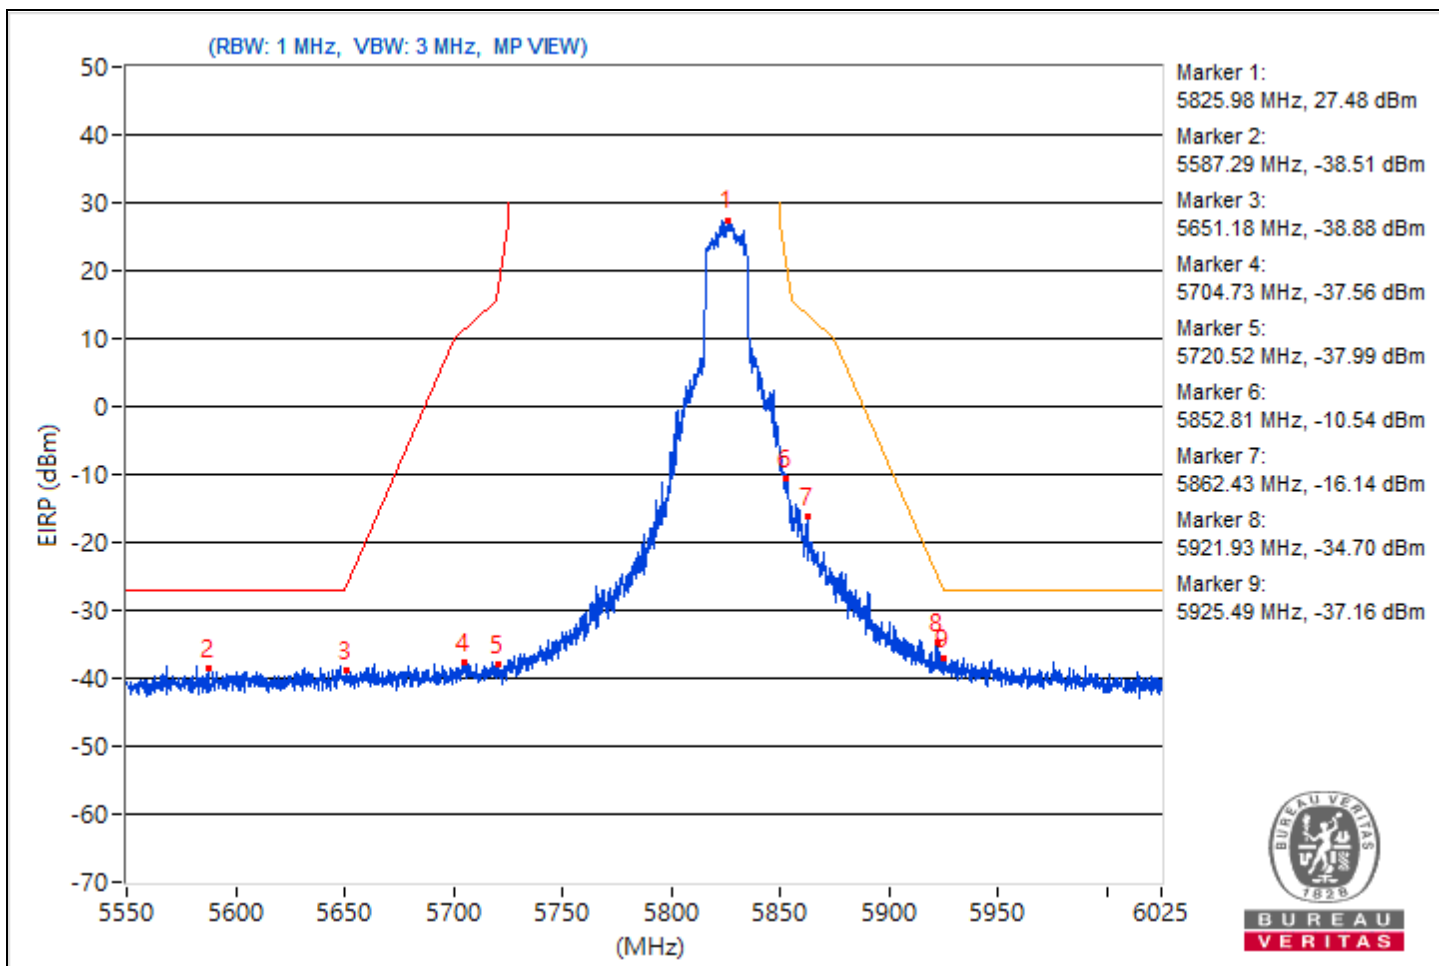




RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5186.48	115.11 PK			8.88	13.69	4.92	19.85
2	*5189.27	105.54 AV			2.45	2.24	4.92	10.28
3	5148.5	66.96 PK	74	-7.04	-38.96	-34.56	4.92	-28.3
4	5150	50.73 AV	54	-3.27	-53.21	-51.82	4.92	-44.53

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

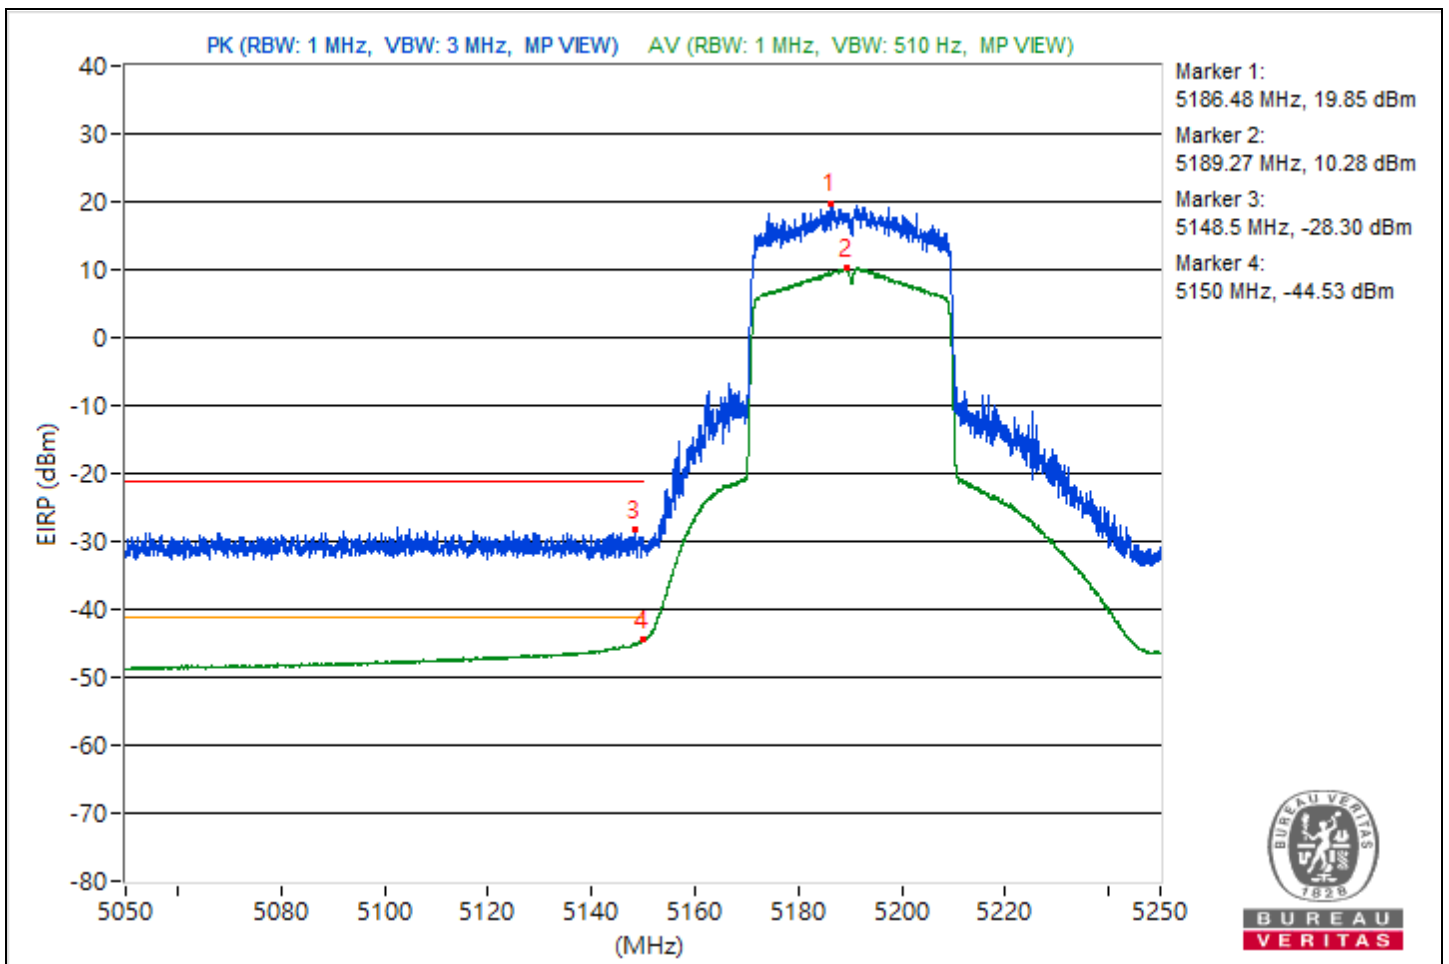


RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5228.27	117.57 PK			15.54	12.78	4.92	22.31
2	*5229.43	107.5 AV			4.55	4.05	4.92	12.24
3	5139.37	67.4 PK	74	-6.6	-37.68	-34.48	4.92	-27.86
4	5149.87	52.7 AV	54	-1.3	-50.22	-50.79	4.92	-42.56

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

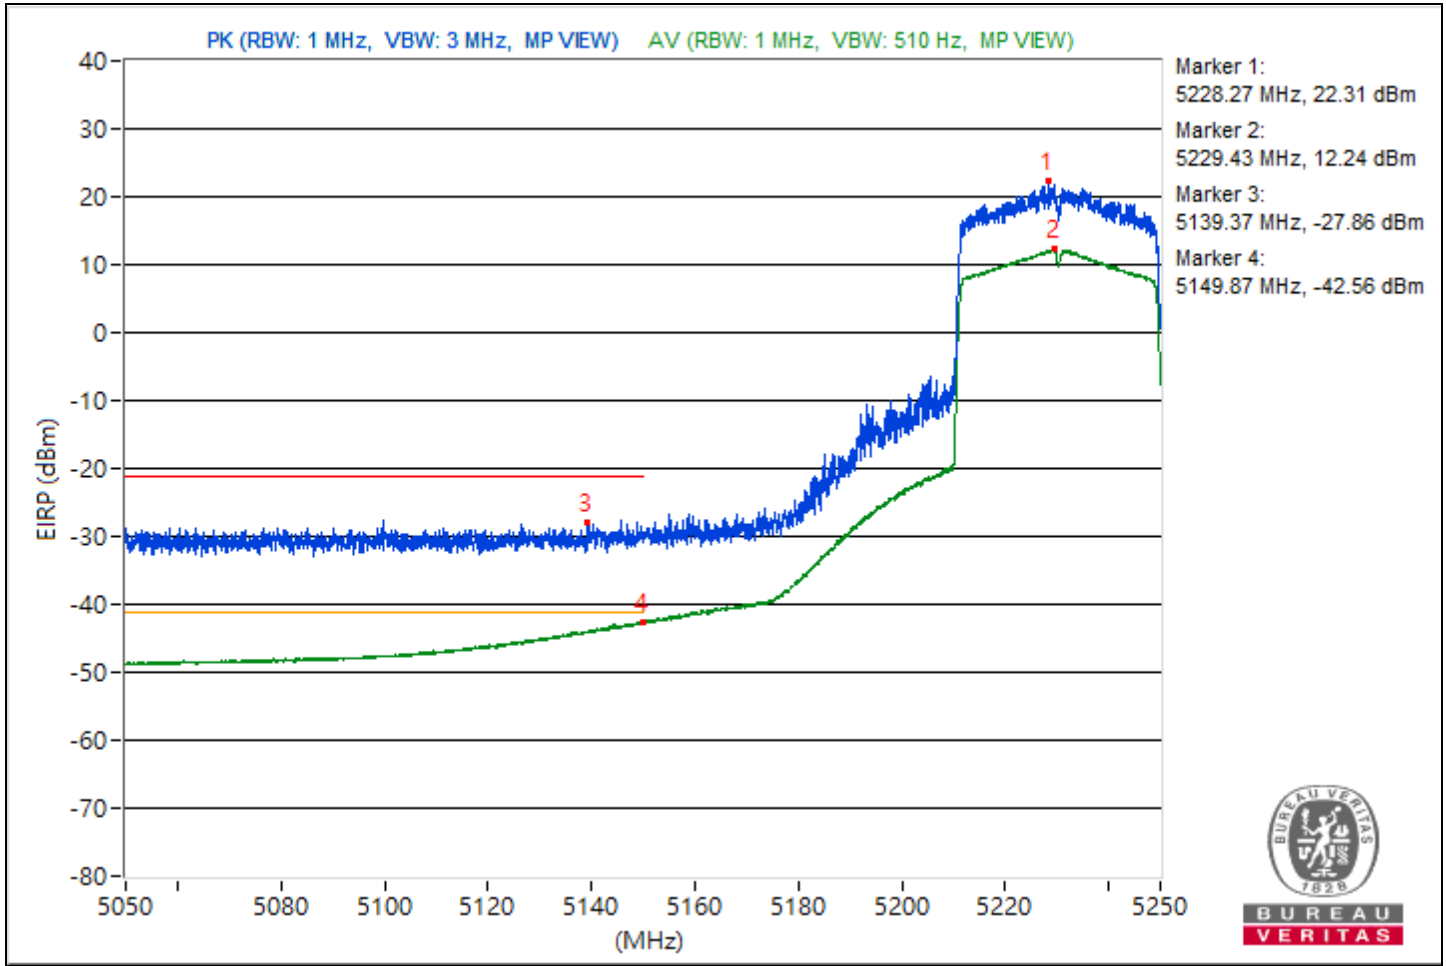


RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5753.42	120			17.79	15.52	4.92	24.74
2	#5637.04	67.44	68.26	-0.82	-37.93	-34.31	4.92	-27.82
3	#5652.84	67.96	70.36	-2.4	-36.21	-34.44	4.92	-27.3
4	#5717.56	93.7	110.18	-16.48	-10.5	-8.68	4.92	-1.56
5	#5720.05	93.76	110.97	-17.21	-8	-11.56	4.92	-1.5
6	#5854.36	69.19	112.33	-43.14	-32.39	-36.56	4.92	-26.07
7	#5864.57	70.35	108.18	-37.83	-34.8	-31.5	4.92	-24.91
8	#5923.23	59.32	69.57	-10.25	-45.69	-42.59	4.92	-35.94
9	#5927.98	59.87	68.26	-8.39	-45.33	-41.96	4.92	-35.39

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

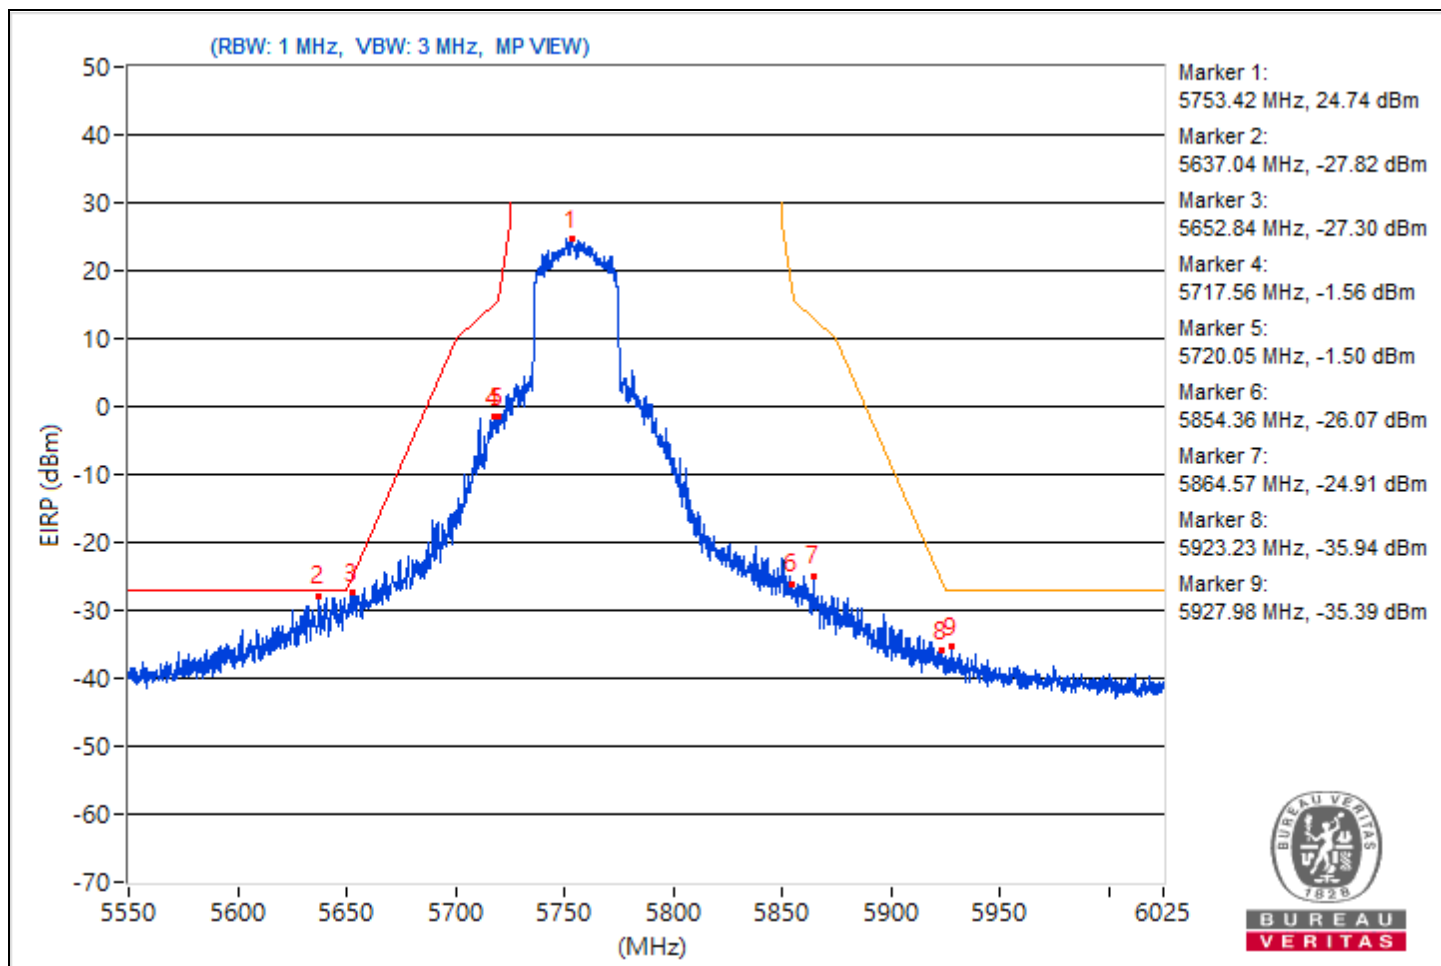


RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5798.31	120.33			15.9	18.11	4.92	25.07
2	#5630.63	63.27	68.26	-4.99	-38.03	-43.36	4.92	-31.99
3	#5651.18	64.27	69.13	-4.86	-44.98	-36.48	4.92	-30.99
4	#5700.46	70.76	105.39	-34.63	-35.32	-30.71	4.92	-24.5
5	#5720.52	72.44	112.06	-39.62	-30.53	-30.97	4.92	-22.82
6	#5853.88	84.64	113.41	-28.77	-15.97	-25.76	4.92	-10.62
7	#5863.38	78.34	108.51	-30.17	-26.67	-23.57	4.92	-16.92
8	#5923.71	67.01	69.22	-2.21	-40.91	-33.97	4.92	-28.25
9	#5930.36	66.75	68.26	-1.51	-35.03	-38.53	4.92	-28.51

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

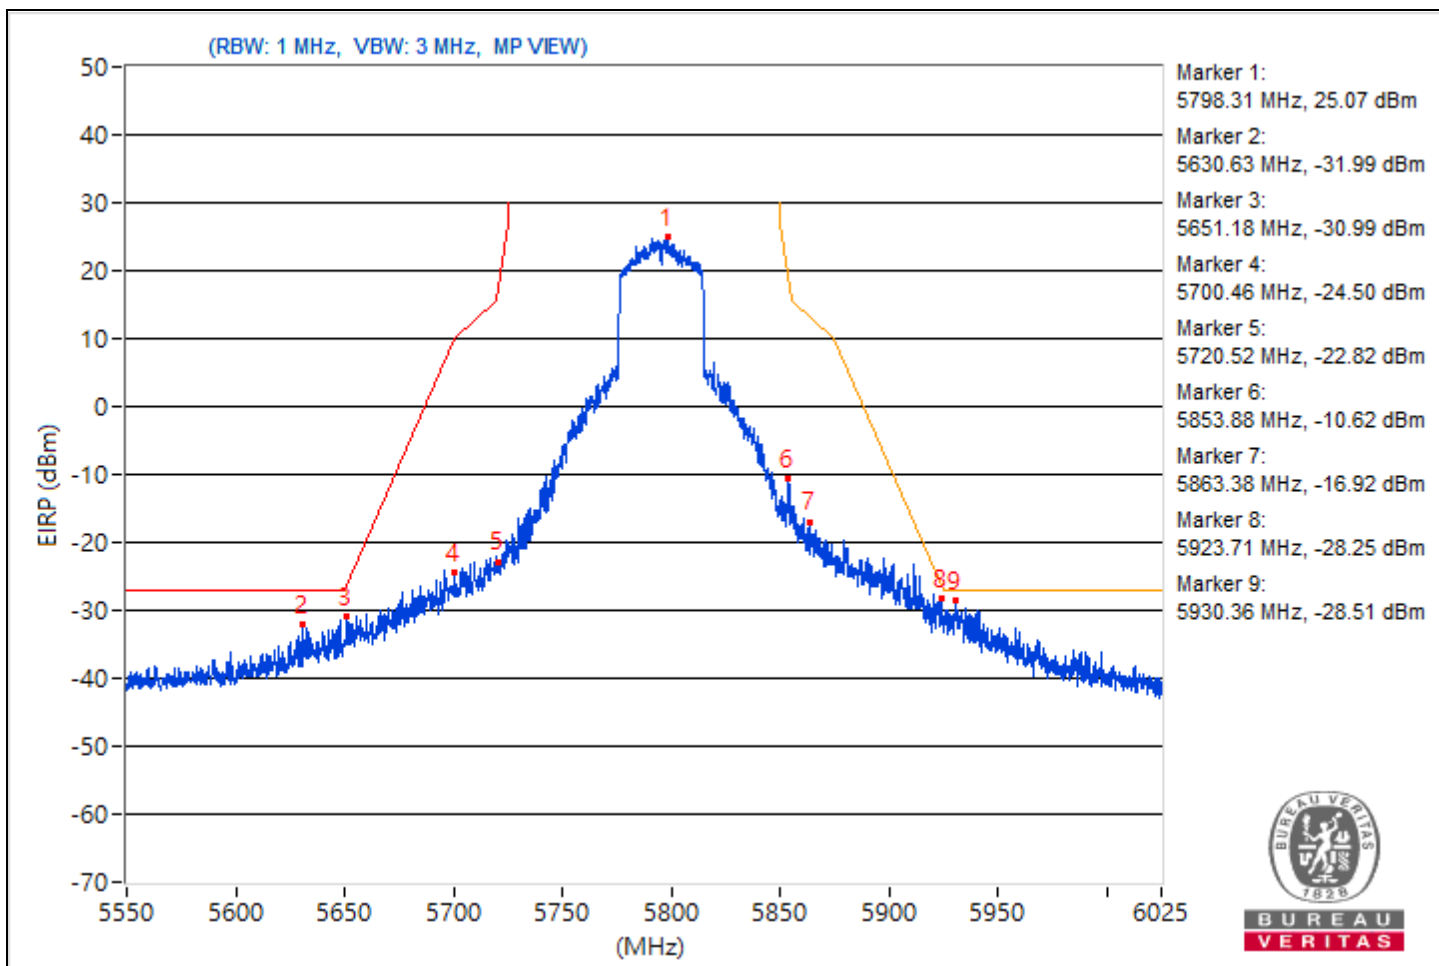


RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5206.25	110.36 PK			4.64	8.76	4.92	15.1
2	*5211.37	100.93 AV			-2.51	-2.02	4.92	5.67
3	5136.7	67.59 PK	74	-6.41	-33.63	-39.29	4.92	-27.67
4	5148.4	49.34 AV	54	-4.66	-54.78	-53.08	4.92	-45.92

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

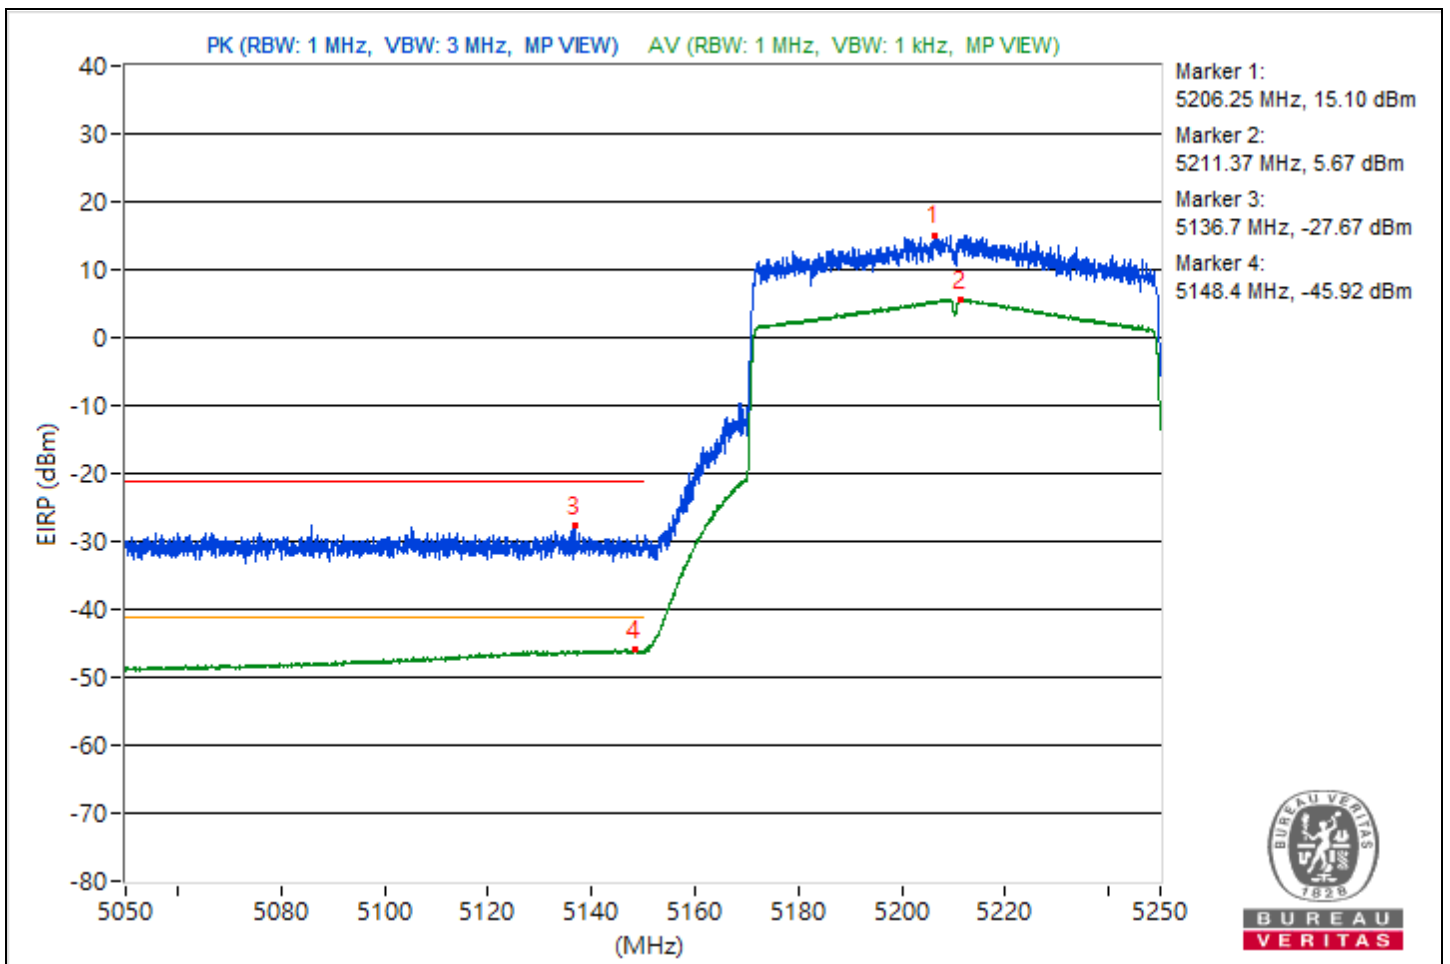


RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5790.71	114.41			13.01	8.1	4.92	19.15
2	#5638.59	64.83	68.26	-3.43	-39.15	-37.69	4.92	-30.43
3	#5650.34	65.65	68.51	-2.86	-35.64	-41	4.92	-29.61
4	#5717.68	88.5	110.21	-21.71	-17.73	-12.91	4.92	-6.76
5	#5720.41	87.05	111.79	-24.74	-18.35	-14.68	4.92	-8.21
6	#5854.83	78.87	111.24	-32.37	-24.09	-24.57	4.92	-16.39
7	#5861.96	79.05	108.91	-29.86	-28.15	-22.09	4.92	-16.21
8	#5924.77	64.8	68.43	-3.63	-36.89	-40.69	4.92	-30.46
9	#5930.59	62.85	68.26	-5.41	-41.23	-39.61	4.92	-32.41

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

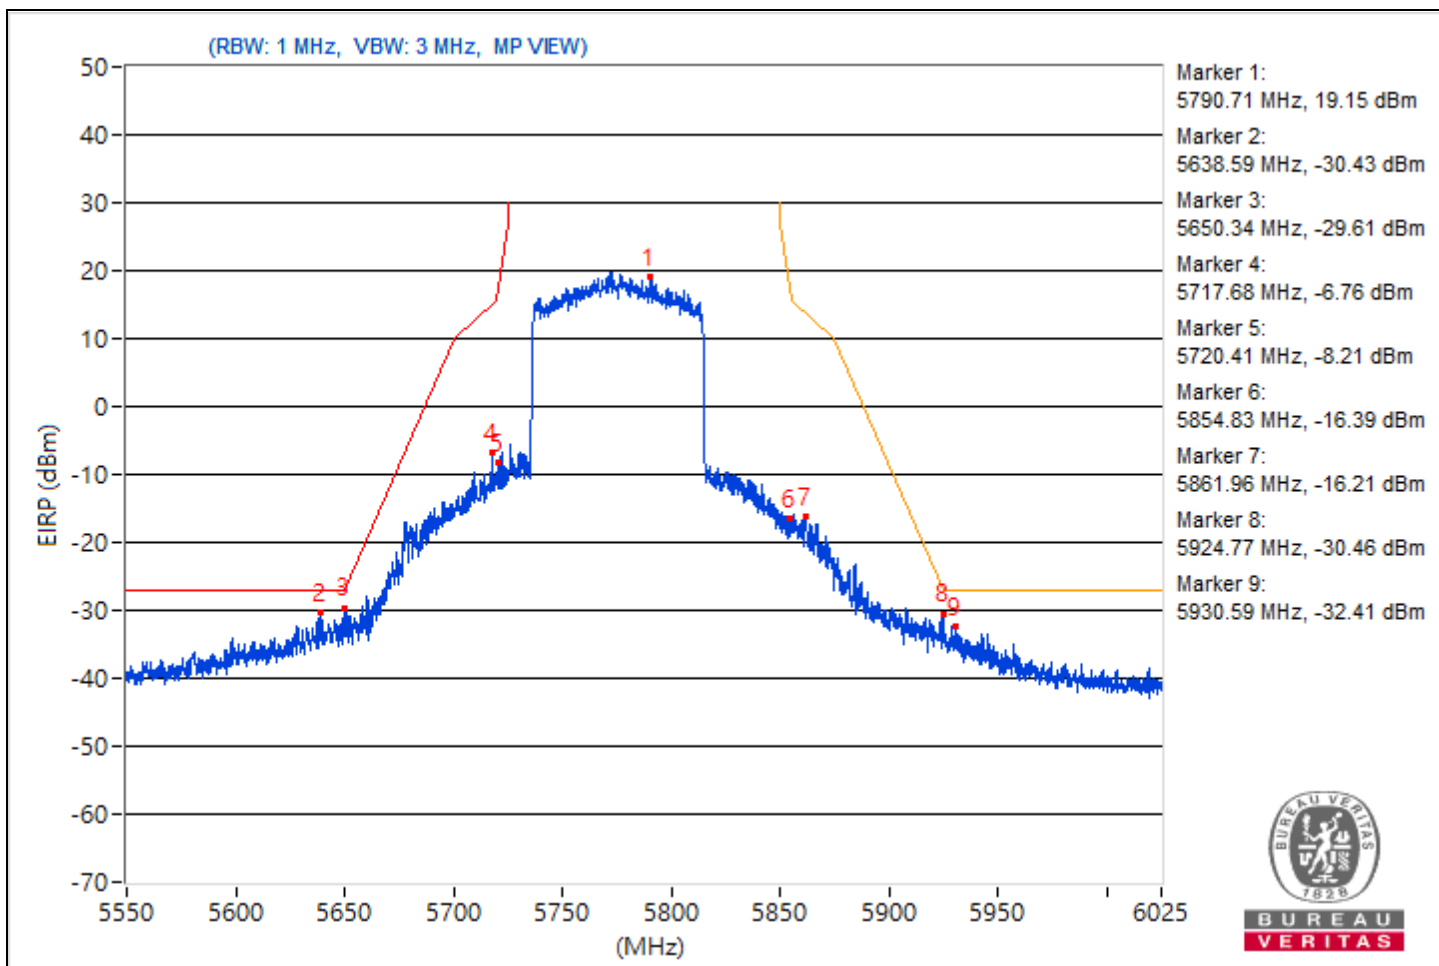


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.87	119.75 PK			15.09	17.65	4.92	24.49
2	*5171.93	110.14 AV			7.08	6.82	4.92	14.88
3	5100.27	67.73 PK	74	-6.27	-33.81	-38.15	4.92	-27.53
4	5112.35	46.81 AV	54	-7.19	-56.19	-56.58	4.92	-48.45

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

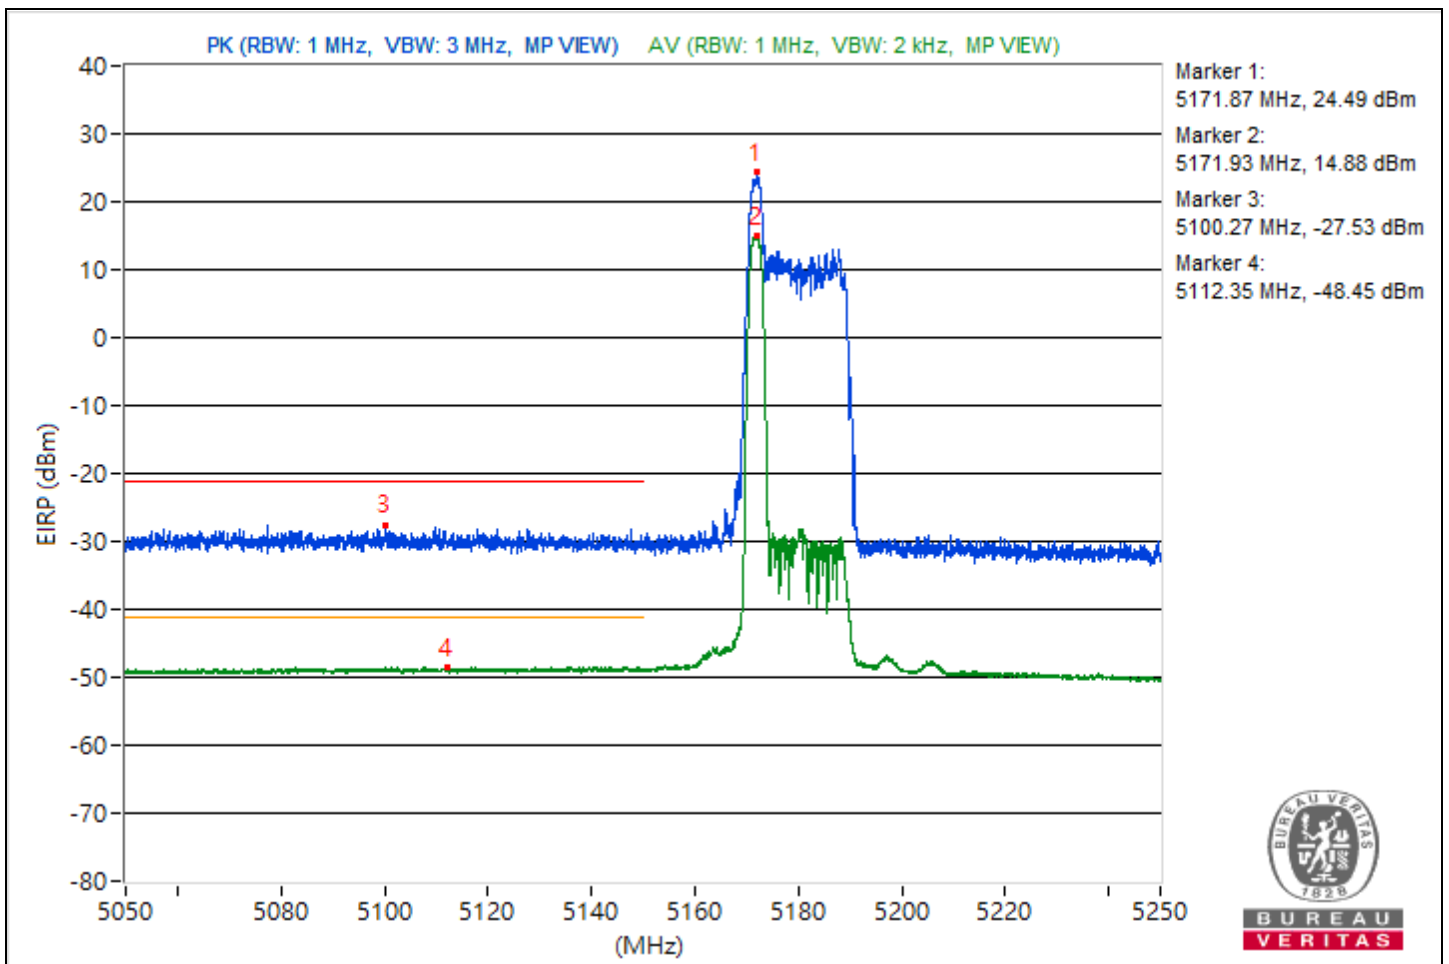


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.98	118.42 PK			13.48	16.48	4.92	23.16
2	*5328.68	109.42 AV			6.19	6.27	4.92	14.16
3	5394.65	64.17 PK	74	-9.83	-40.74	-37.8	4.92	-31.09
4	5353.2	44.73 AV	54	-9.27	-58.15	-58.79	4.92	-50.53

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

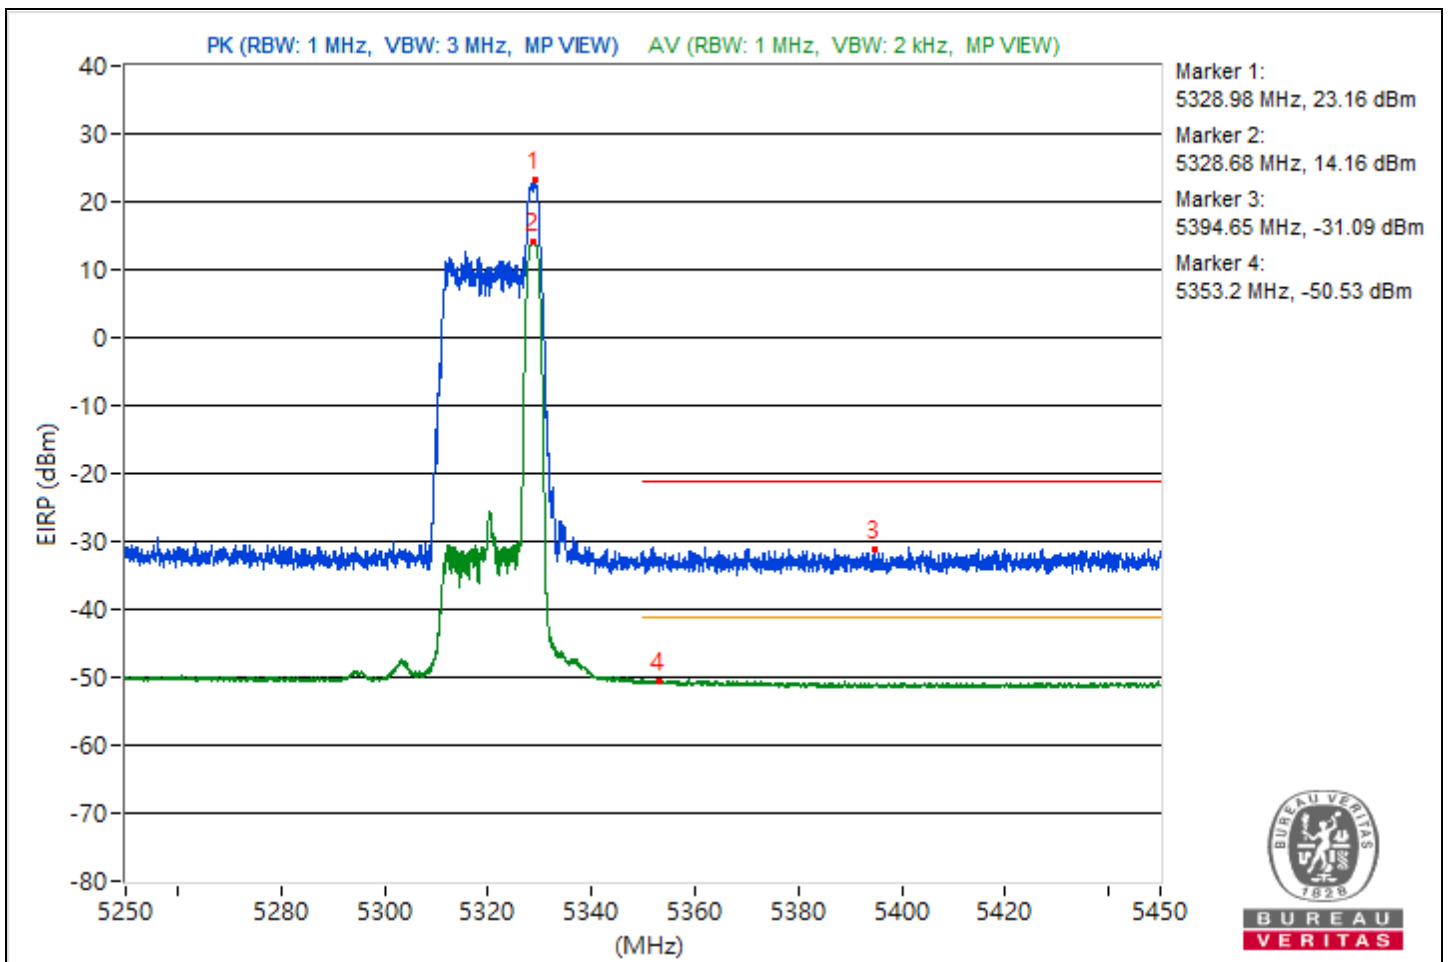




RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5492.37	119.83 PK			14.52	18.06	4.92	24.57
2	5455.97	65.16 PK	74	-8.84	-40.72	-36.38	4.92	-30.1
3	#5463.81	63.98 PK	68.26	-4.28	-40.83	-38.04	4.92	-31.28
4	*5492	110 AV			6.98	6.63	4.92	14.74
5	5449.12	44.87 AV	54	-9.13	-58.68	-57.98	4.92	-50.39

Notes:


1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

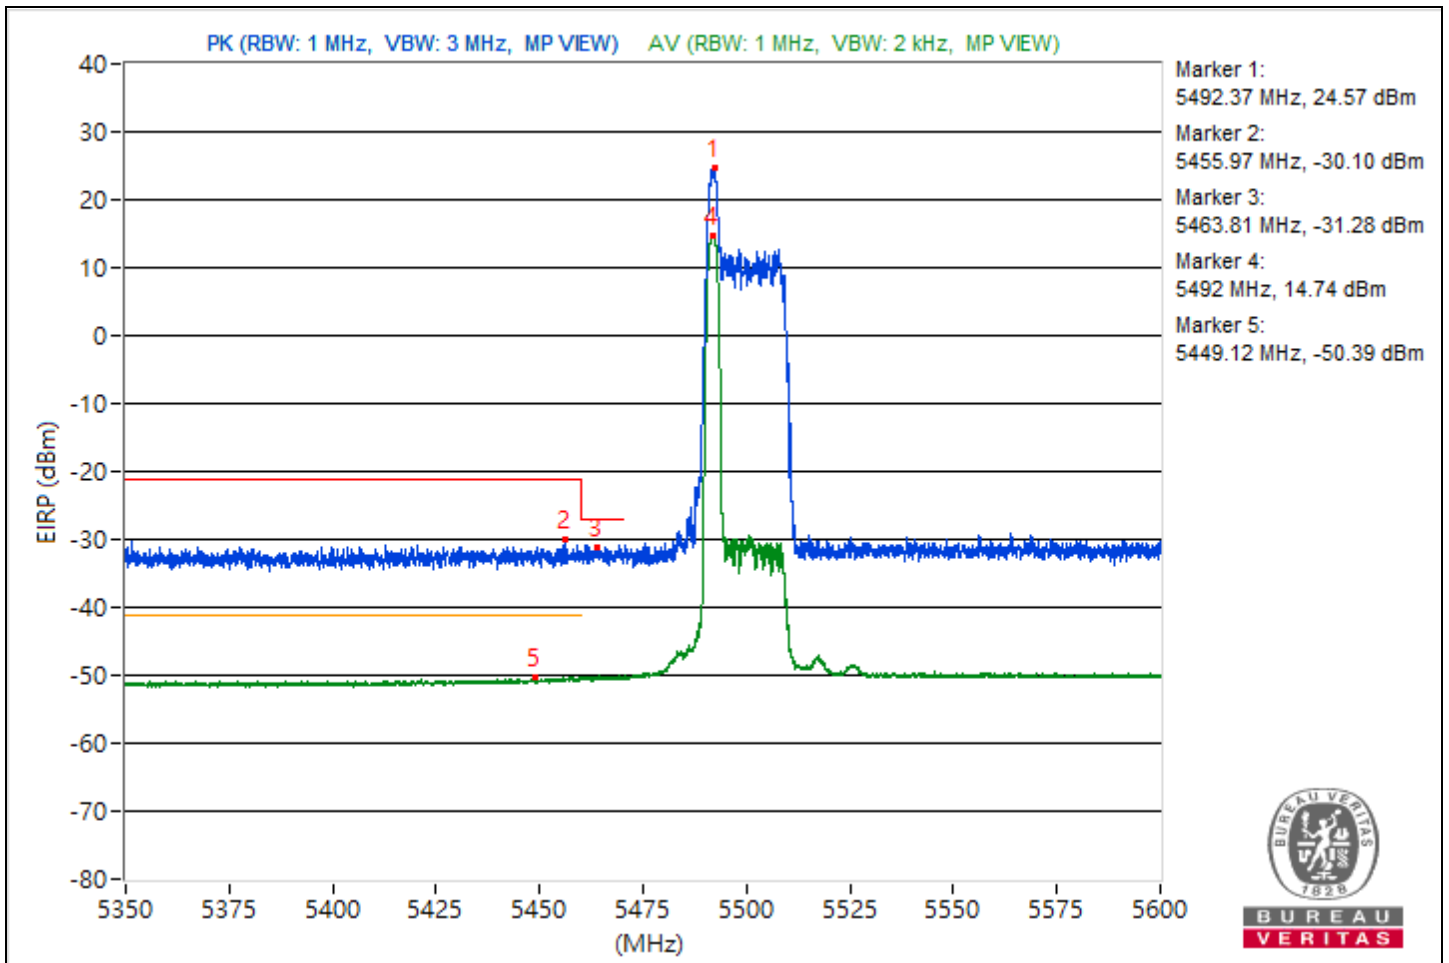

RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.65	118.73			16.05	14.96	4.92	23.47
2	#5823.93	65.17	68.26	-3.09	-40.39	-36.49	4.92	-30.09

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
  3. " # ": The radiated frequency is out of the restricted band.

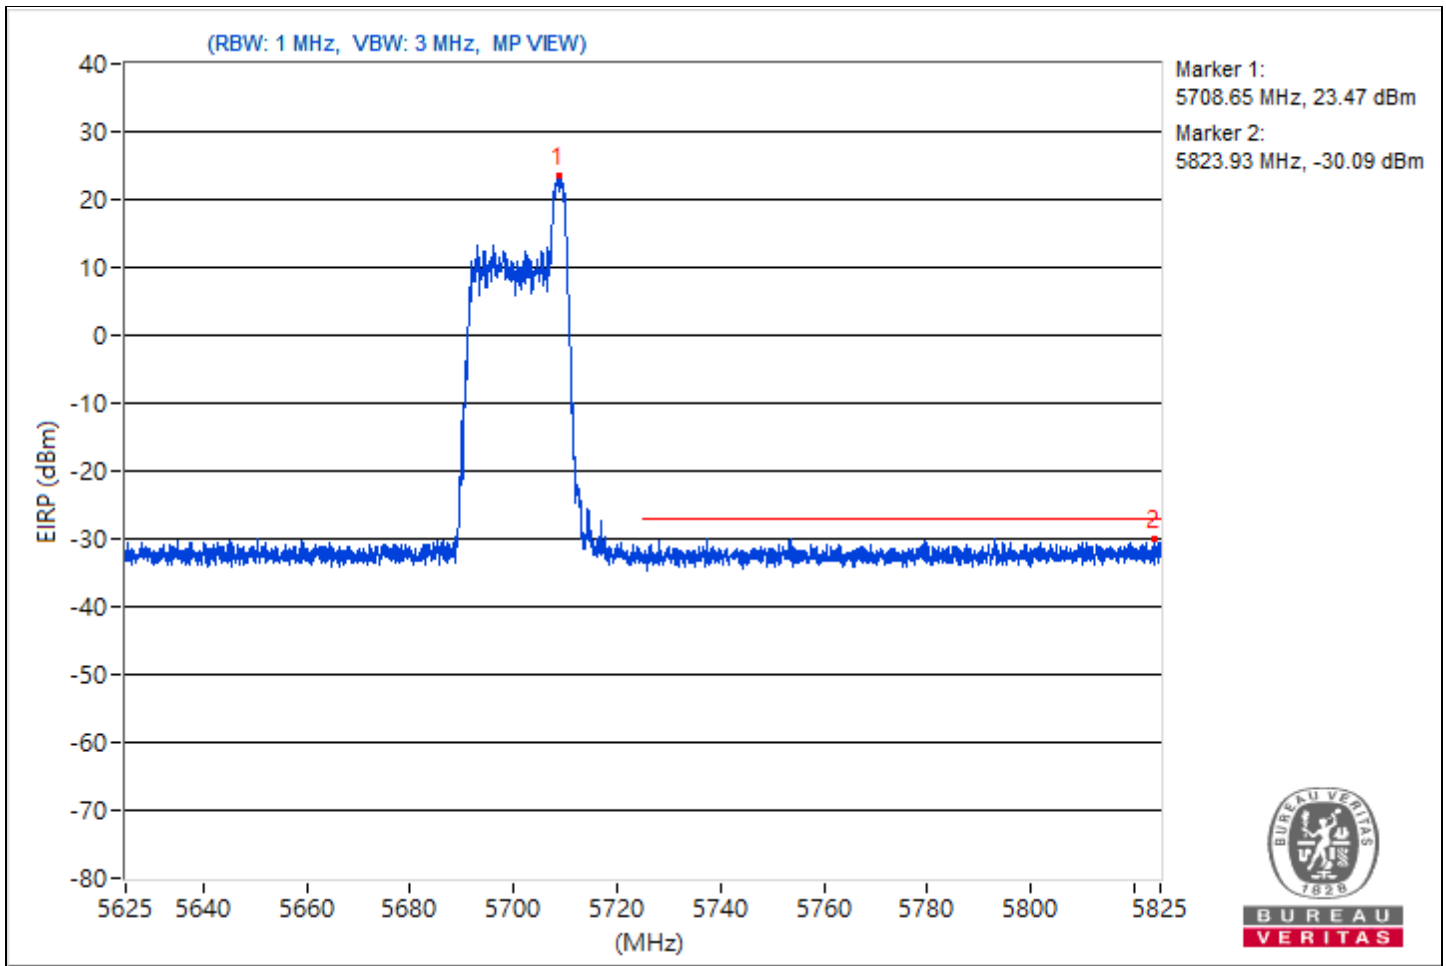


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.54	118.83			15.01	16.19	4.92	23.57
2	#5915.81	65.57	68.26	-2.69	-36.51	-39.14	4.92	-29.69

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

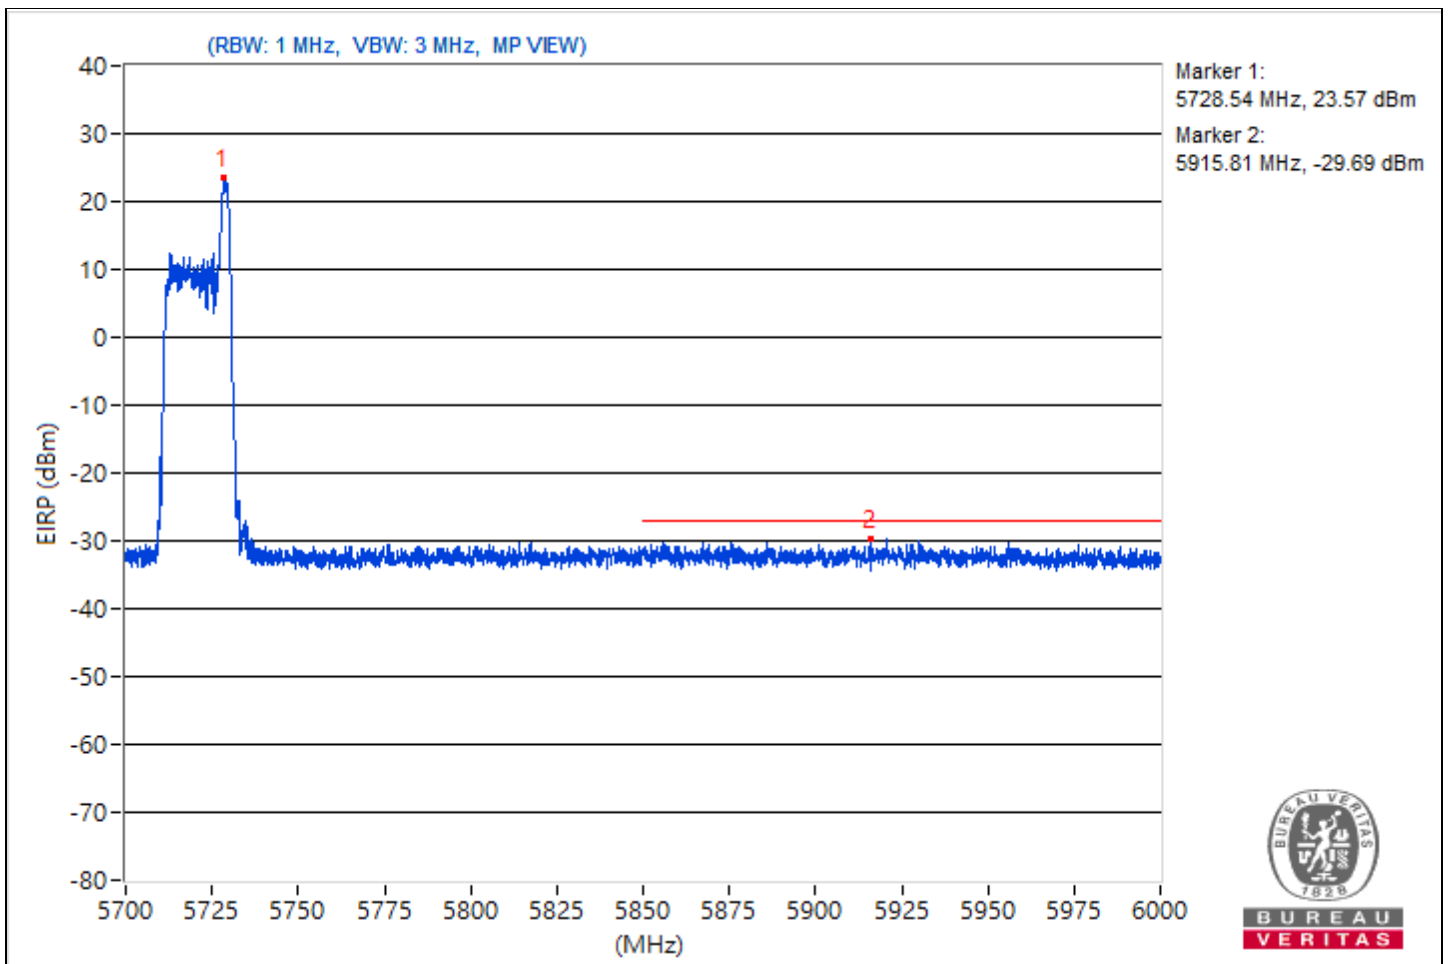


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.68	129.49			26.2	26.4	4.92	34.23
2	#5643.1	58.69	68.26	-9.57	-46.4	-43.19	4.92	-36.57
3	#5650.94	57.61	68.95	-11.34	-44.42	-47.17	4.92	-37.65
4	#5701.76	88.28	105.75	-17.47	-13.56	-16.88	4.92	-6.98
5	#5722.66	87.73	116.93	-29.2	-17.21	-14.21	4.92	-7.53
6	#5854.83	56.57	111.24	-54.67	-46.71	-46.53	4.92	-38.69
7	#5868.73	57.93	107.02	-49.09	-43.96	-47.12	4.92	-37.33
8	#5923.11	55.92	69.66	-13.74	-46.3	-48.51	4.92	-39.34
9	#5991.99	56.33	68.26	-11.93	-45.15	-49.71	4.92	-38.93

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

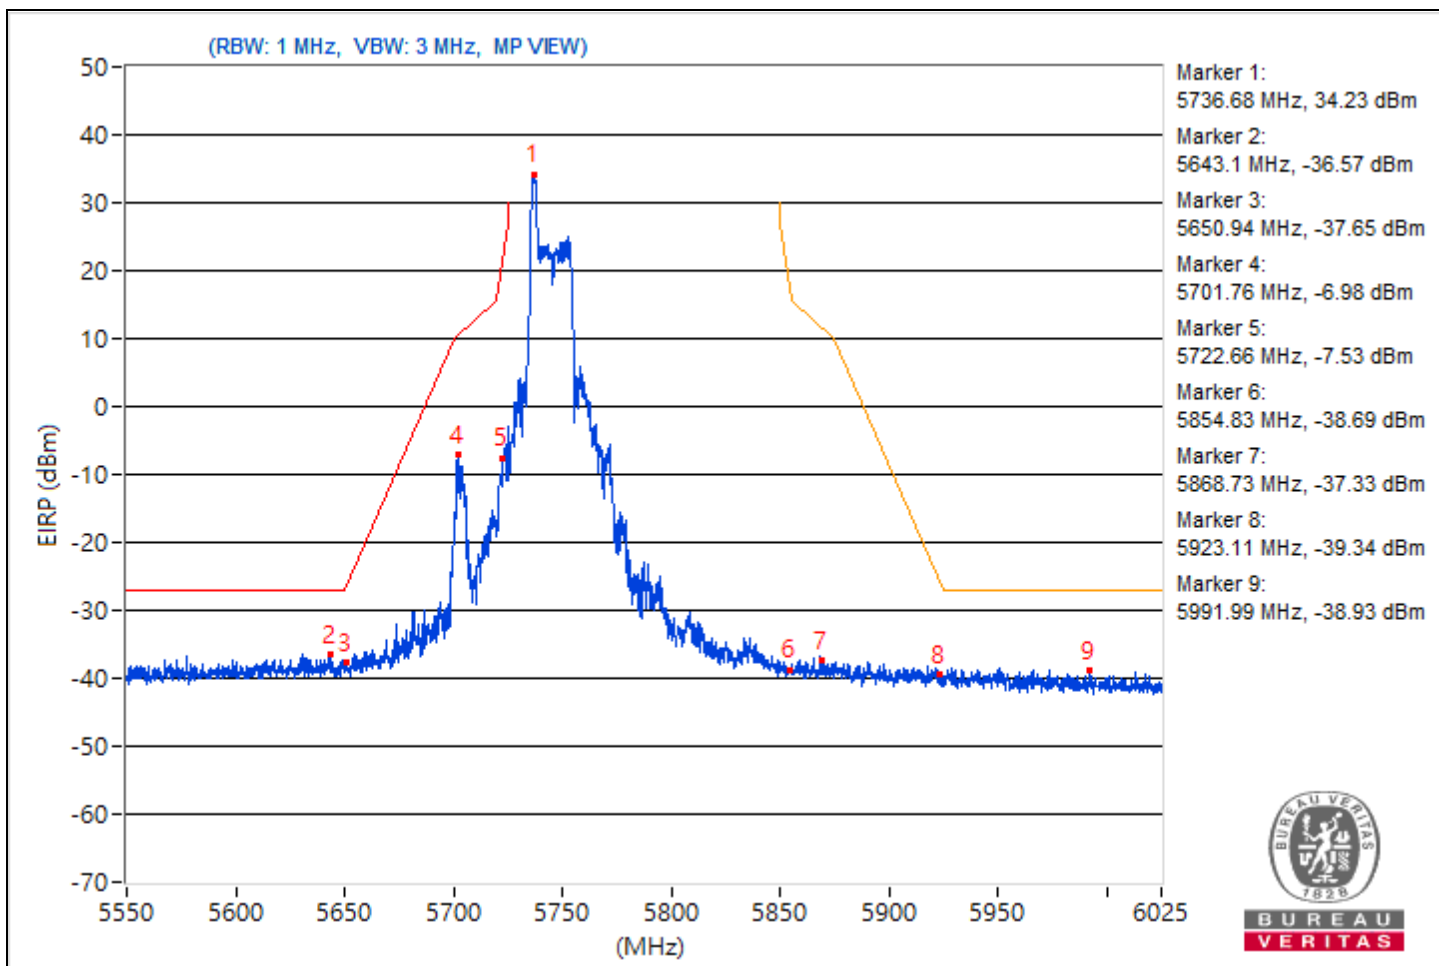


RF Mode	802.11ax (HE20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.46	129.52			26.32	26.33	4.92	34.26
2	#5628.73	57.25	68.26	-11.01	-44.61	-47.87	4.92	-38.01
3	#5650.46	55.97	68.6	-12.63	-46.67	-47.84	4.92	-39.29
4	#5701.52	57.55	105.69	-48.14	-46.76	-44.75	4.92	-37.71
5	#5720.64	58.13	112.33	-54.2	-45.82	-44.42	4.92	-37.13
6	#5854.83	78.48	111.24	-32.76	-24.71	-24.71	4.92	-16.78
7	#5868.37	92.97	107.12	-14.15	-13.71	-8.31	4.92	-2.29
8	#5923.94	57.16	69.04	-11.88	-46.77	-45.39	4.92	-38.1
9	#5940.21	57.63	68.26	-10.63	-47.27	-44.34	4.92	-37.63

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

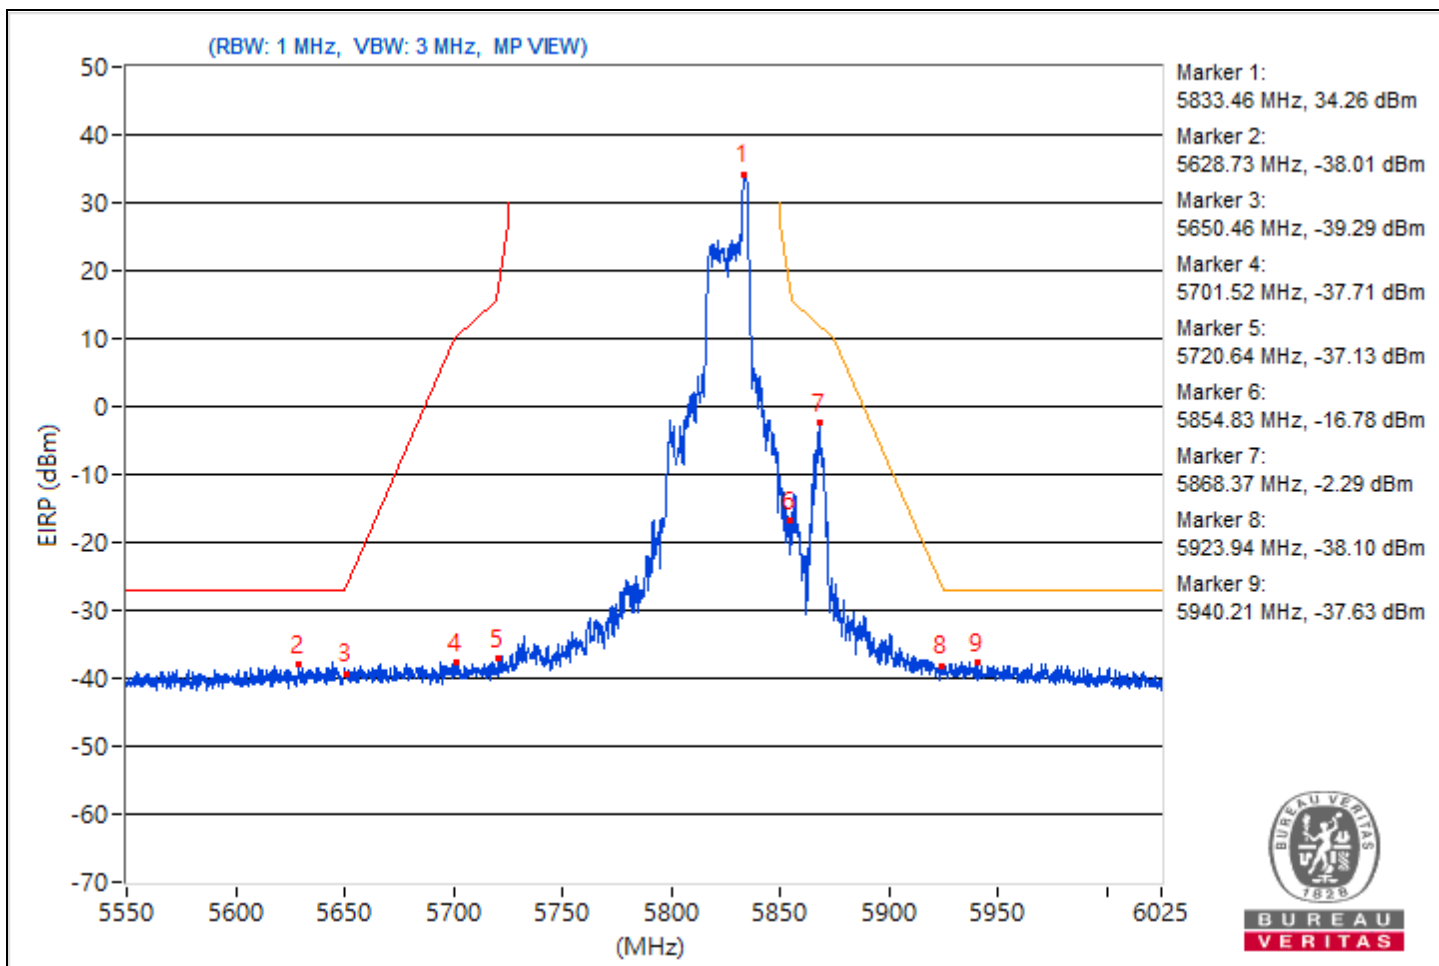


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5172.6	119.42 PK			17.13	15.1	4.92	24.16
2	*5174	109.76 AV			6.39	6.74	4.92	14.5
3	5113.2	66.97 PK	74	-7.03	-34.56	-38.93	4.92	-28.29
4	5139.75	47.82 AV	54	-6.18	-55.03	-55.75	4.92	-47.44

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

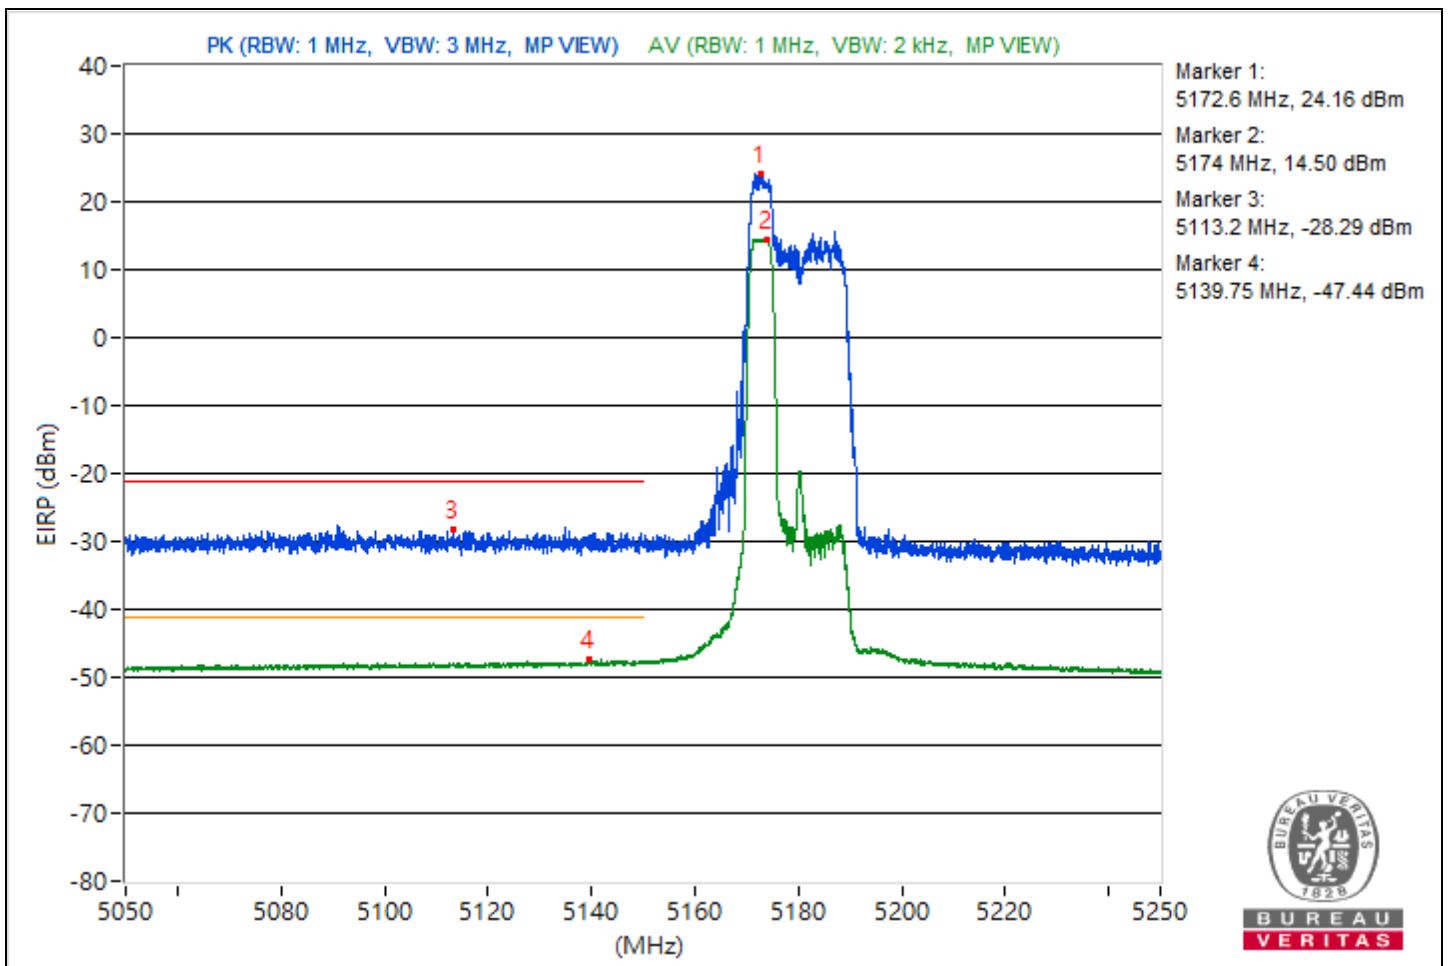


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.68	118.58 PK			15.69	15.07	4.92	23.32
2	*5328.68	109.76 AV			6.42	6.71	4.92	14.5
3	5365.15	64.46 PK	74	-9.54	-41.21	-37.16	4.92	-30.8
4	5350.82	46.42 AV	54	-7.58	-56.56	-57	4.92	-48.84

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

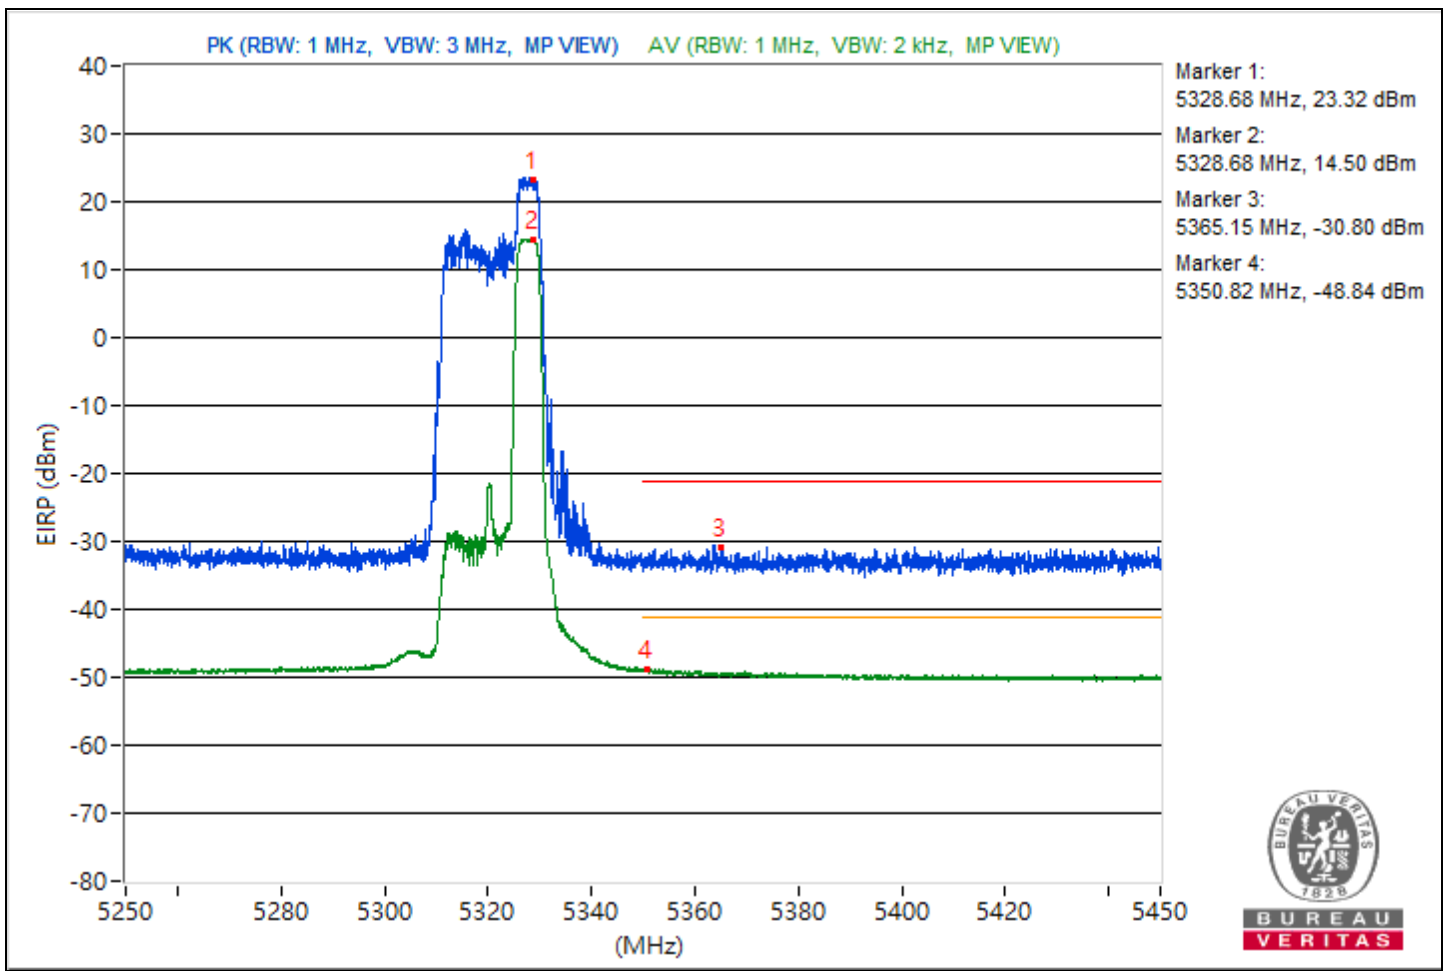


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5492.06	120.21 PK			16.49	17.49	4.92	24.95
2	5399.37	64.48 PK	74	-9.52	-40.97	-37.24	4.92	-30.78
3	#5460.91	64.84 PK	68.26	-3.42	-39.66	-37.35	4.92	-30.42
4	*5492.87	109.76 AV			6.53	6.61	4.92	14.5
5	5459.12	46.31 AV	54	-7.69	-56.57	-57.21	4.92	-48.95

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

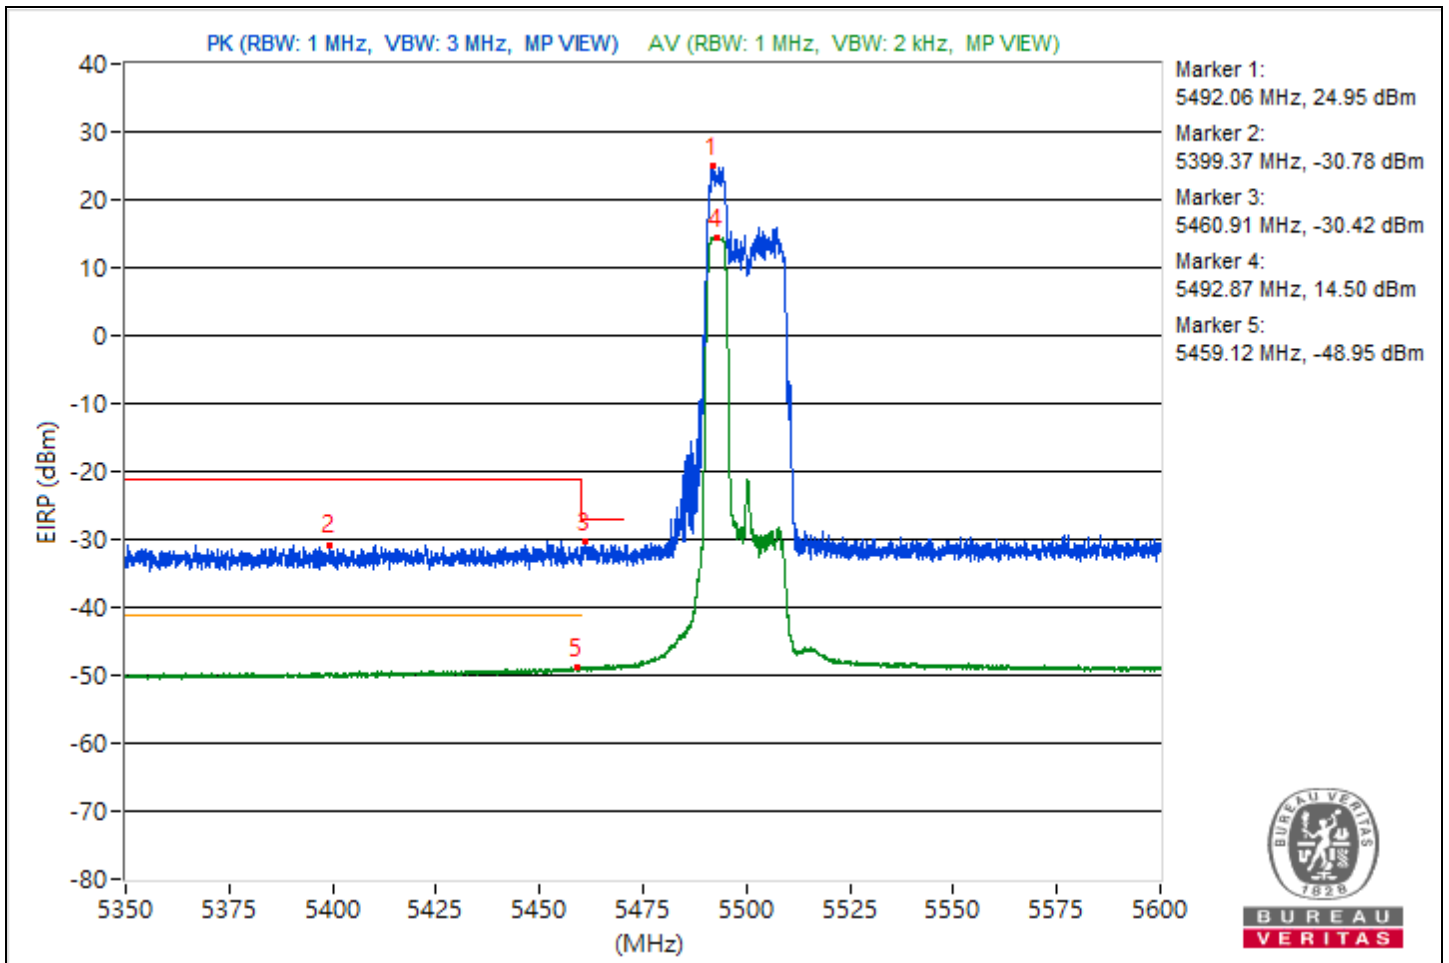




RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.55	119.83			17.95	14.77	4.92	24.57
2	#5811.8	65.72	68.26	-2.54	-40.05	-35.87	4.92	-29.54


- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
  3. " # ": The radiated frequency is out of the restricted band.

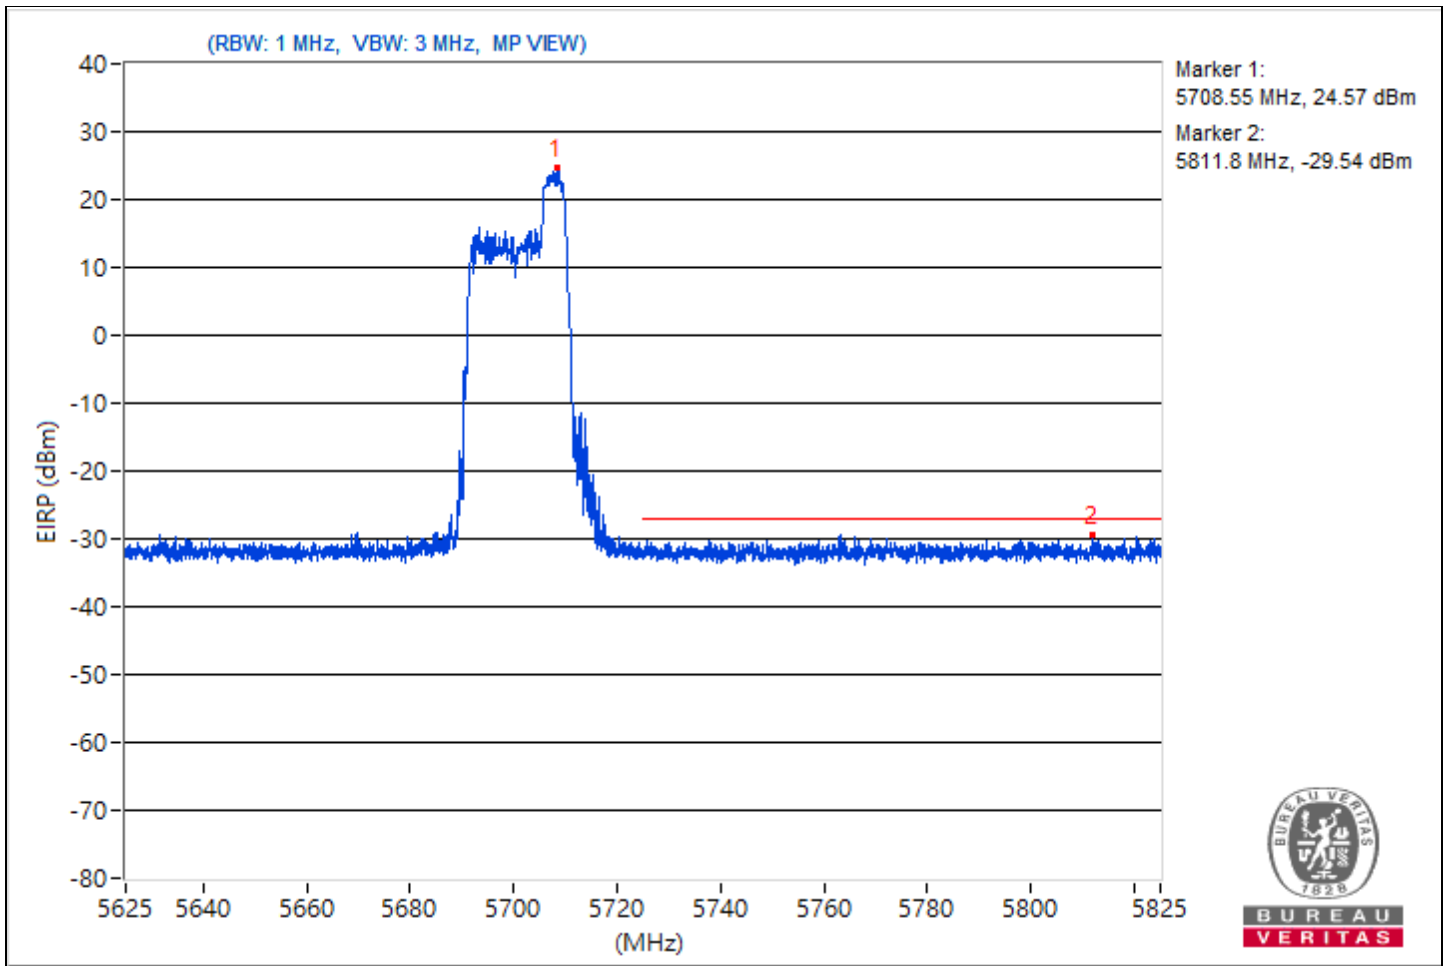

RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5729.36	119.61			16.84	15.96	4.92	24.35
2	#5927.14	65.96	68.26	-2.3	-35.94	-39.05	4.92	-29.3

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
  3. " # ": The radiated frequency is out of the restricted band.

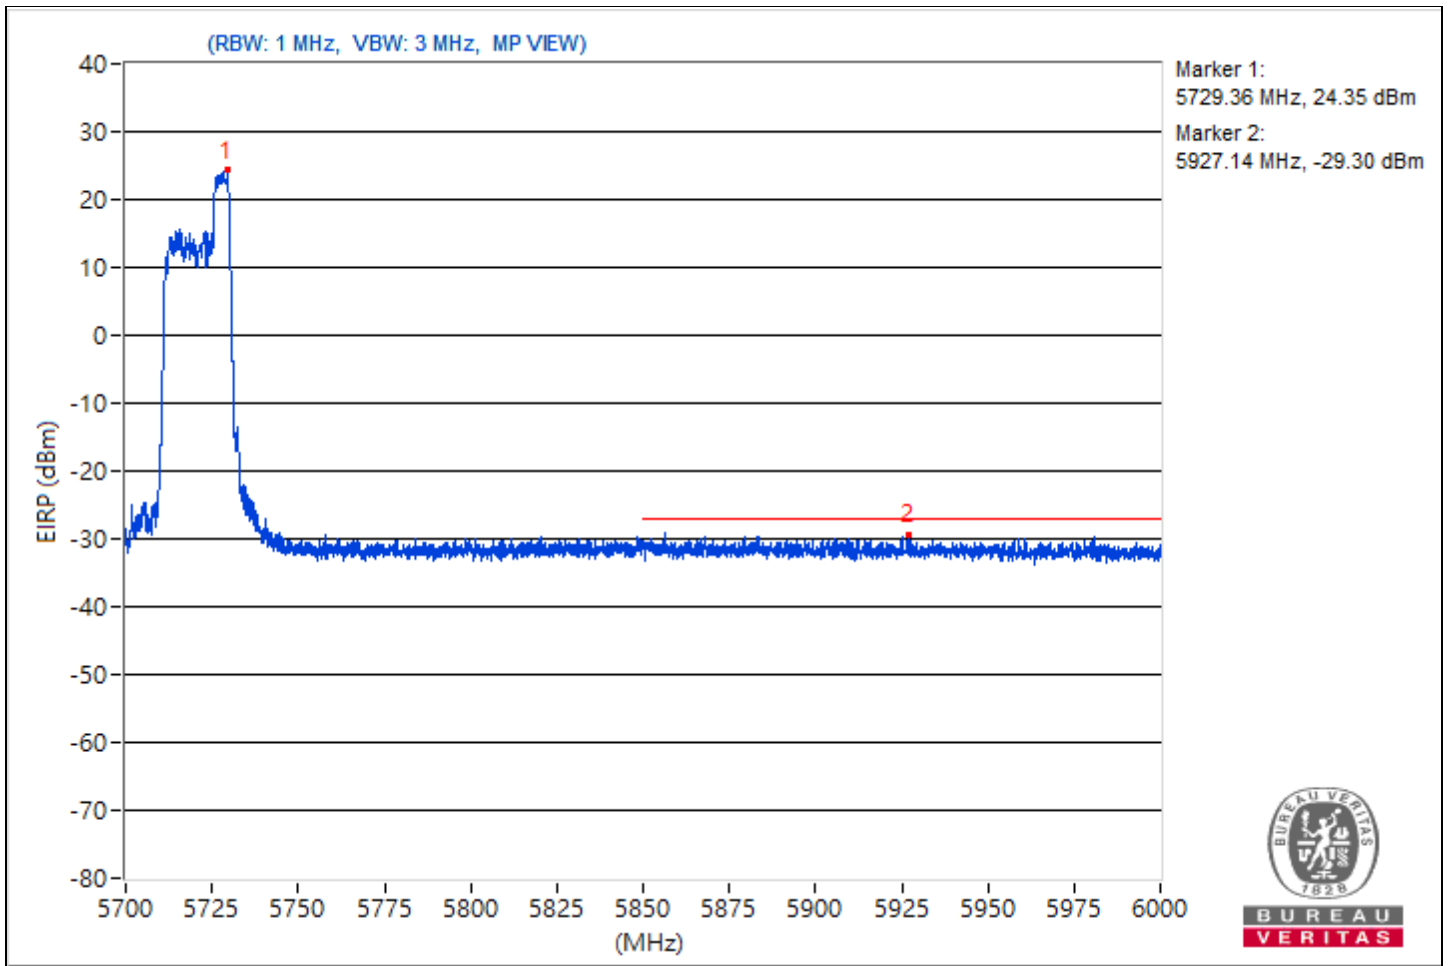


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5738.34	127.26			24.51	23.58	4.92	32
2	#5626.83	58.04	68.26	-10.22	-47.65	-43.58	4.92	-37.22
3	#5650.46	57.4	68.6	-11.2	-44.97	-46.81	4.92	-37.86
4	#5706.63	85.62	107.12	-21.5	-15.62	-21.21	4.92	-9.64
5	#5721.36	86.35	113.95	-27.6	-16.74	-16.94	4.92	-8.91
6	#5854.83	57.02	111.24	-54.22	-46.1	-46.23	4.92	-38.24
7	#5873.12	57.22	105.79	-48.57	-45.14	-47.01	4.92	-38.04
8	#5923.59	55.95	69.31	-13.36	-46.95	-47.56	4.92	-39.31
9	#5946.74	56.49	68.26	-11.77	-47.67	-45.91	4.92	-38.77

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

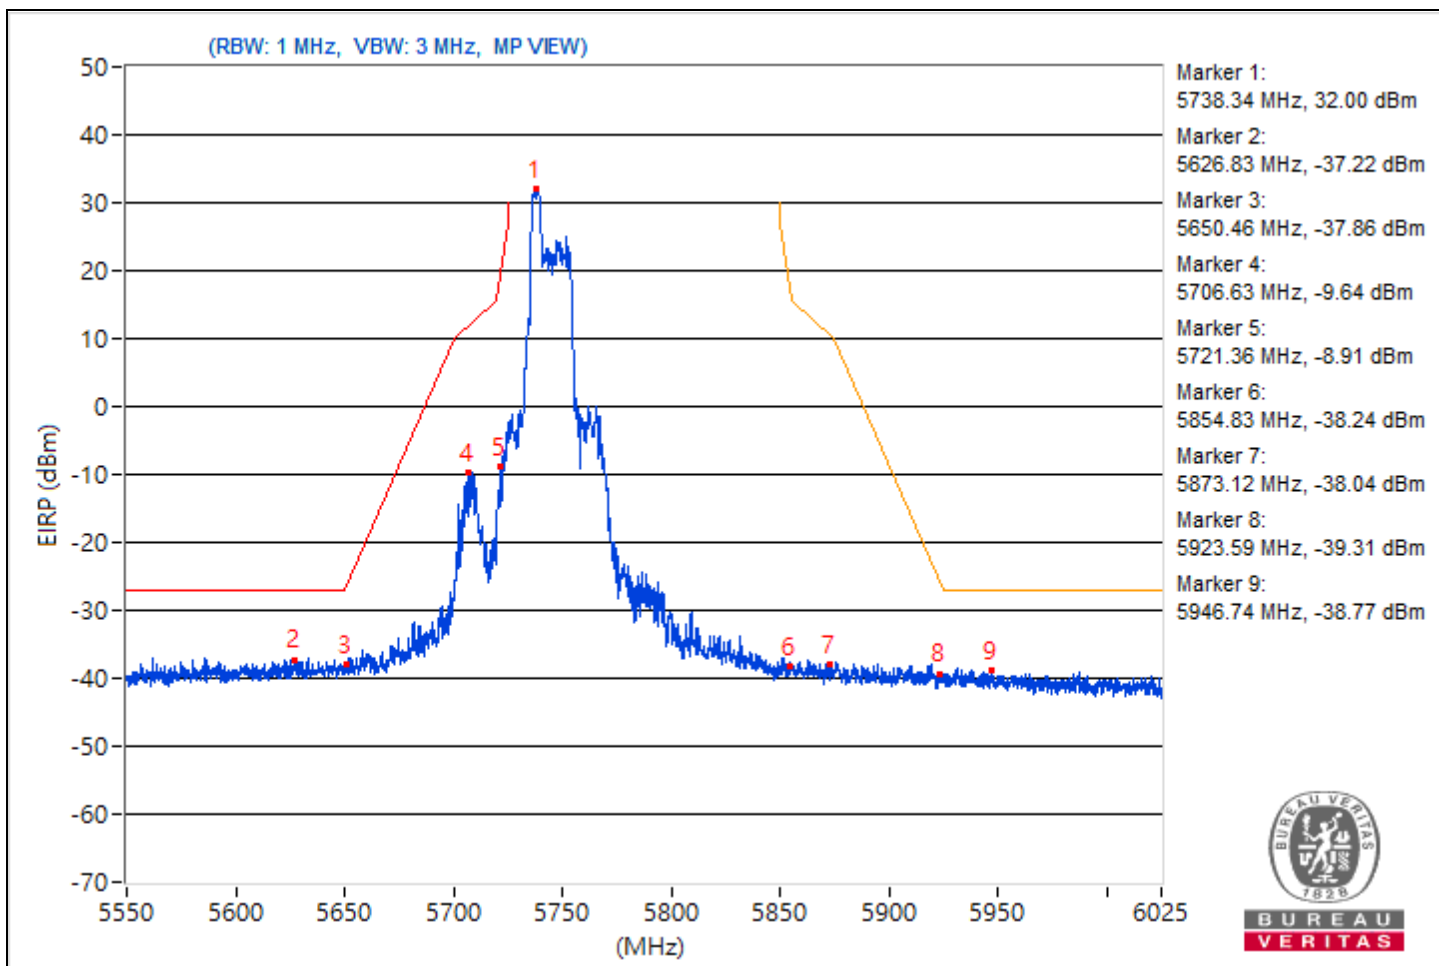


RF Mode	802.11ax (HE20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.22	127.75			25.31	23.66	4.92	32.49
2	#5590.37	57.13	68.26	-11.13	-47.51	-44.97	4.92	-38.13
3	#5651.18	55.98	69.13	-13.15	-47.4	-47.04	4.92	-39.28
4	#5700.34	57.04	105.35	-48.31	-45.36	-47.12	4.92	-38.22
5	#5720.41	56.5	111.79	-55.29	-45.69	-48	4.92	-38.76
6	#5854.36	78.62	112.33	-33.71	-24.79	-24.35	4.92	-16.64
7	#5863.14	89.14	108.58	-19.44	-14.25	-13.86	4.92	-6.12
8	#5921.09	58.4	71.15	-12.75	-46.59	-43.52	4.92	-36.86
9	#5944.37	59.3	68.26	-8.96	-46.43	-42.3	4.92	-35.96

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

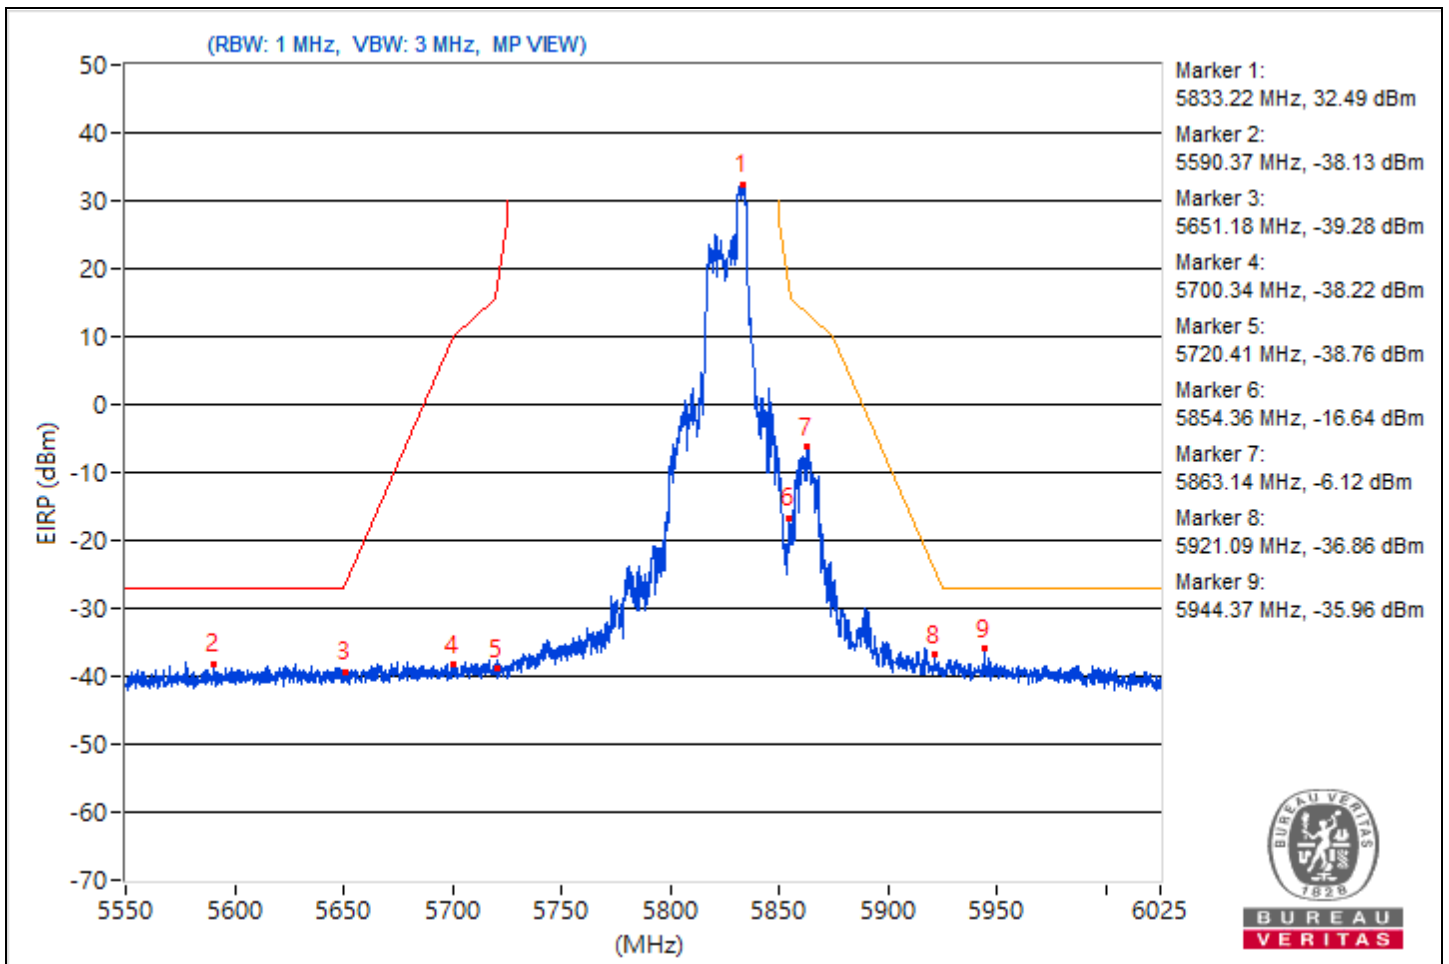


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5173.15	120.37 PK			15.69	18.29	4.92	25.11
2	*5174.8	109.6 AV			6.13	6.68	4.92	14.34
3	5083.07	66.73 PK	74	-7.27	-37.76	-35.45	4.92	-28.53
4	5149.93	48.91 AV	54	-5.09	-53.93	-54.66	4.92	-46.35

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

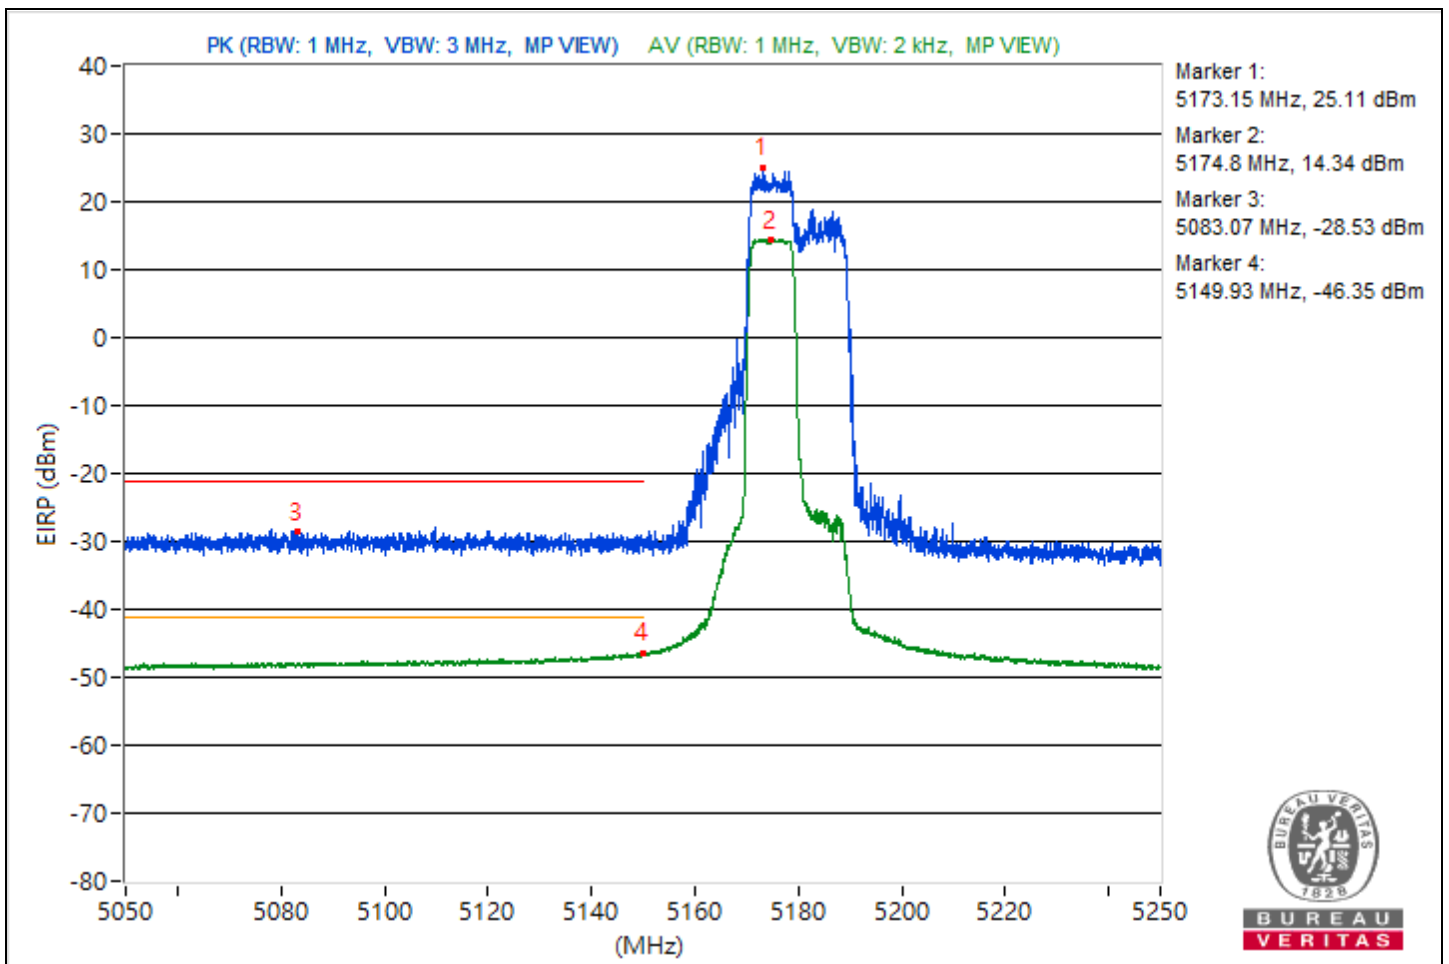


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5325.7	119.7 PK			17.46	15.3	4.92	24.44
2	*5323.75	109.7 AV			6.71	6.29	4.92	14.44
3	5426.18	64.9 PK	74	-9.1	-37.22	-39.7	4.92	-30.36
4	5350.12	48.58 AV	54	-5.42	-54.67	-54.56	4.92	-46.68

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

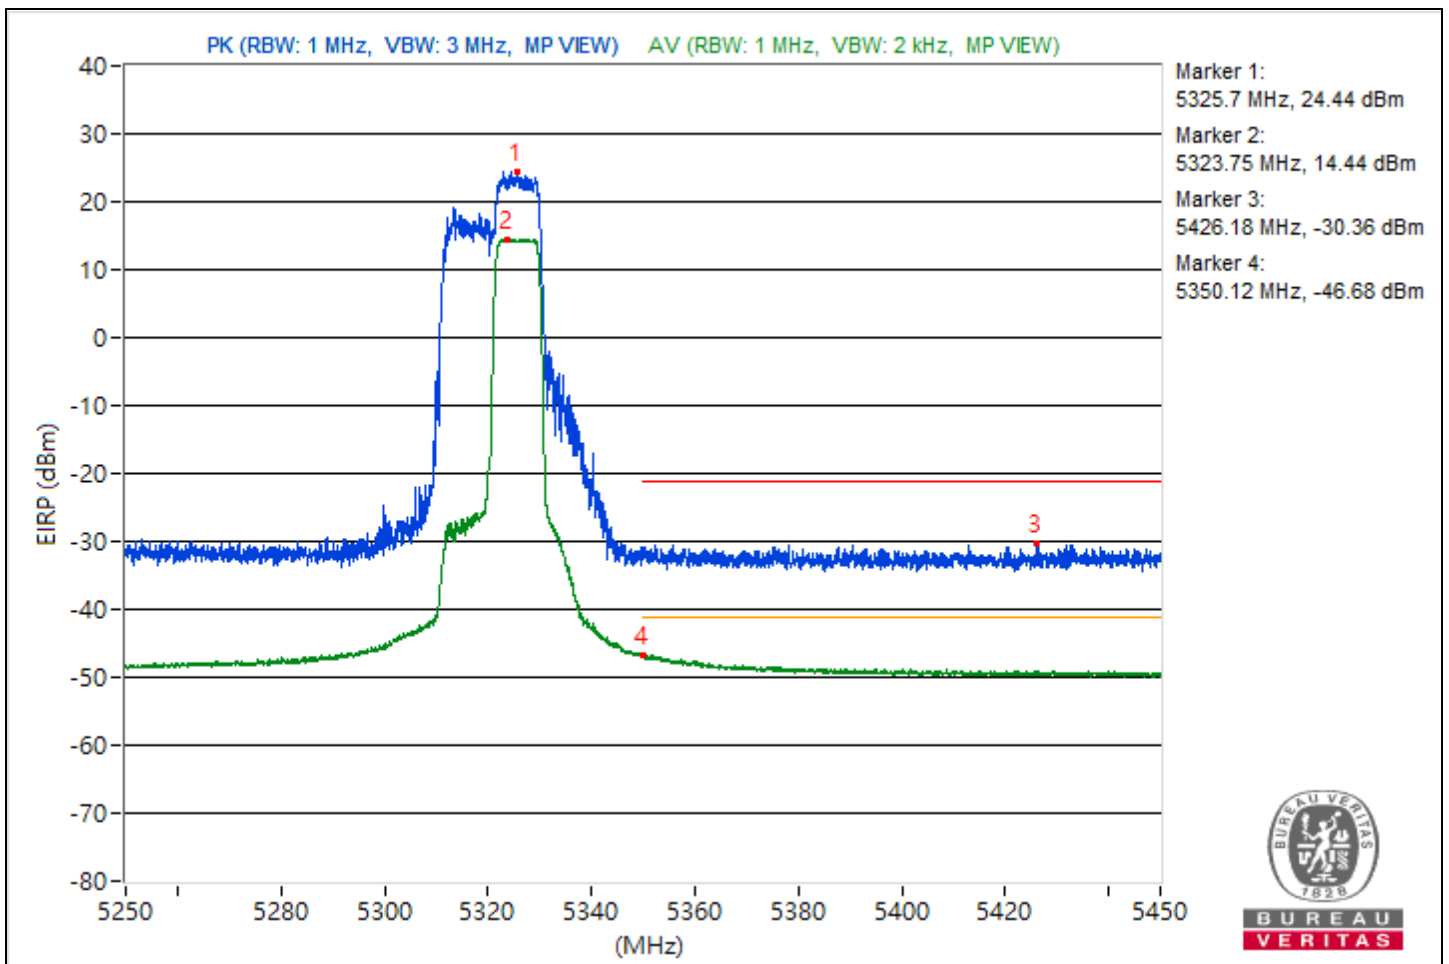


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5494.09	120.33 PK			18.23	15.69	4.92	25.07
2	5355.34	65.1 PK	74	-8.9	-36.91	-39.71	4.92	-30.16
3	#5462.41	64.51 PK	68.26	-3.75	-40.96	-37.2	4.92	-30.75
4	*5492.03	109.59 AV			6.72	6.06	4.92	14.33
5	5459.91	47.42 AV	54	-6.58	-56.22	-55.36	4.92	-47.84

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

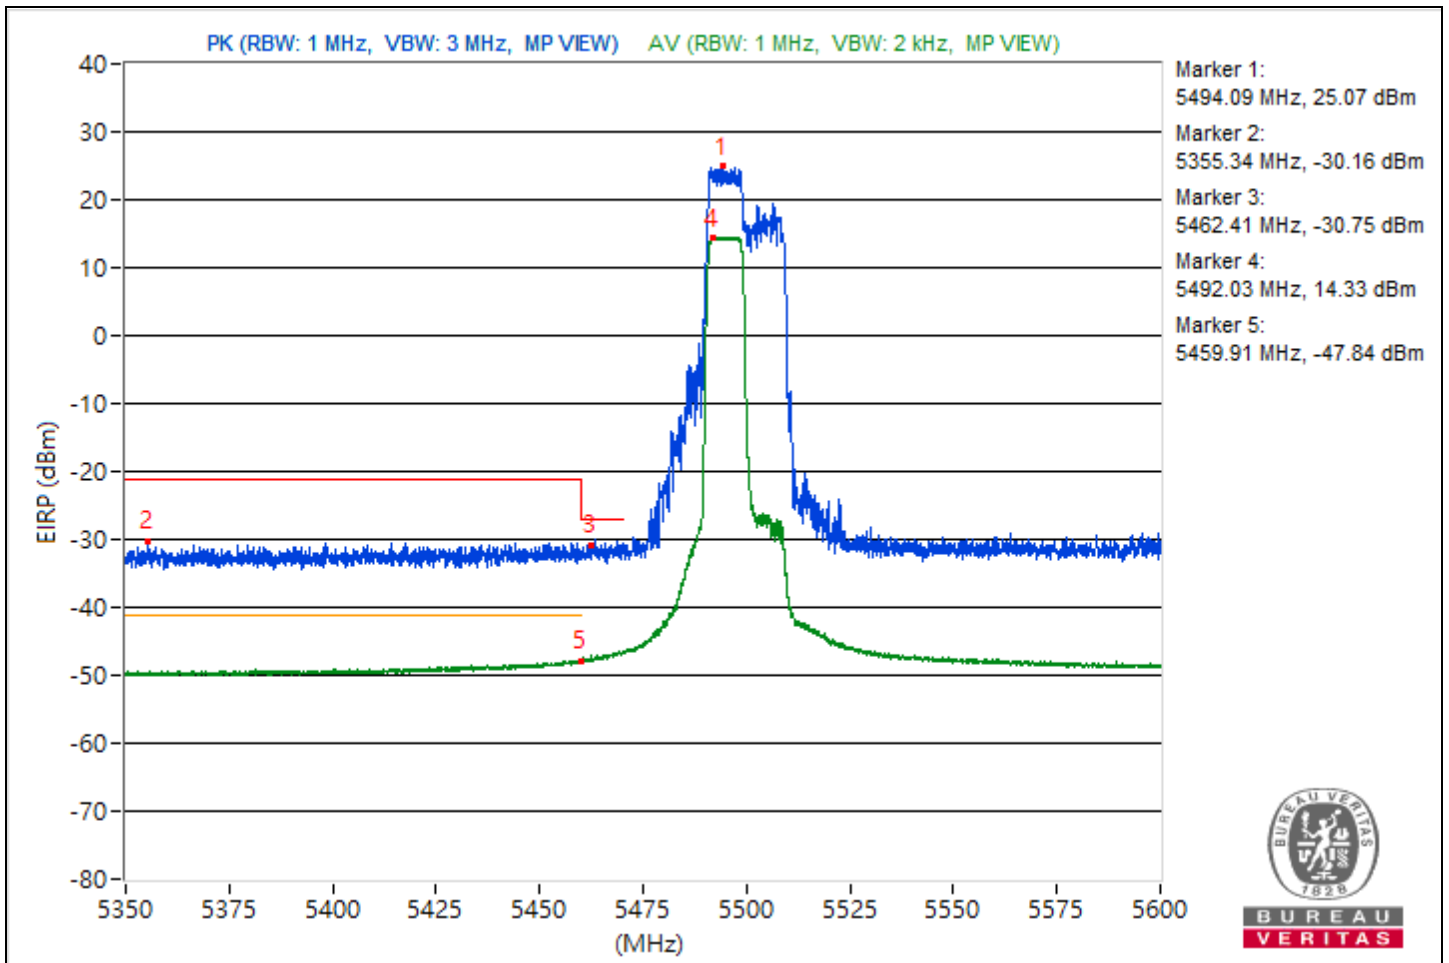


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.65	119.91			14.53	18.17	4.92	24.65
2	#5752.37	65.64	68.26	-2.62	-39.1	-36.4	4.92	-29.62

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

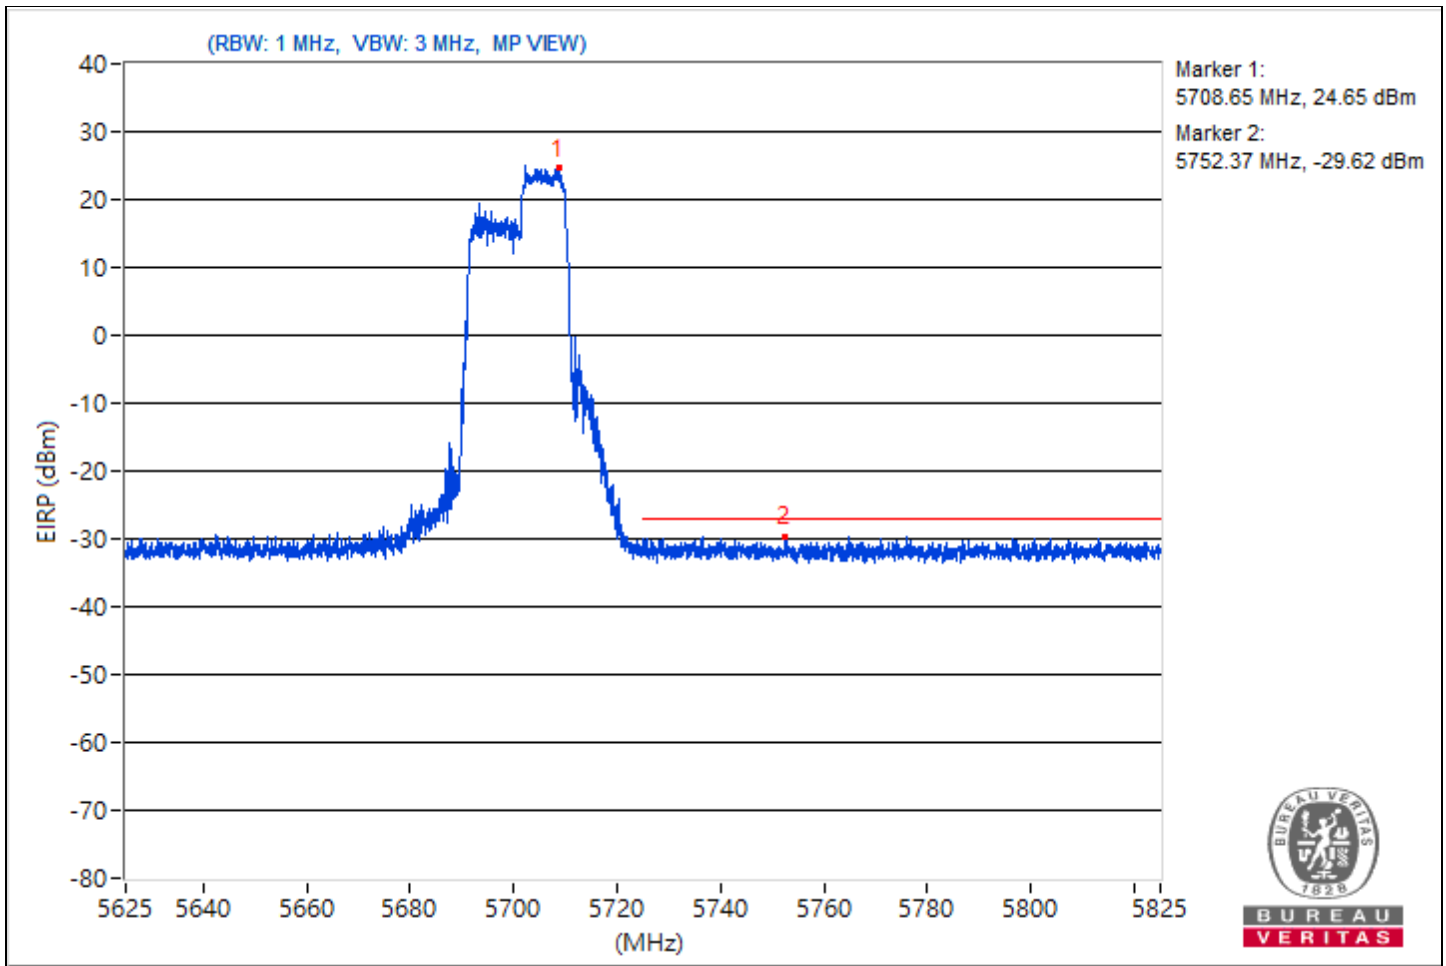




RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5725.16	119.73			16.29	16.78	4.92	24.47
2	#5852.21	65.5	68.26	-2.76	-39.25	-36.55	4.92	-29.76

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

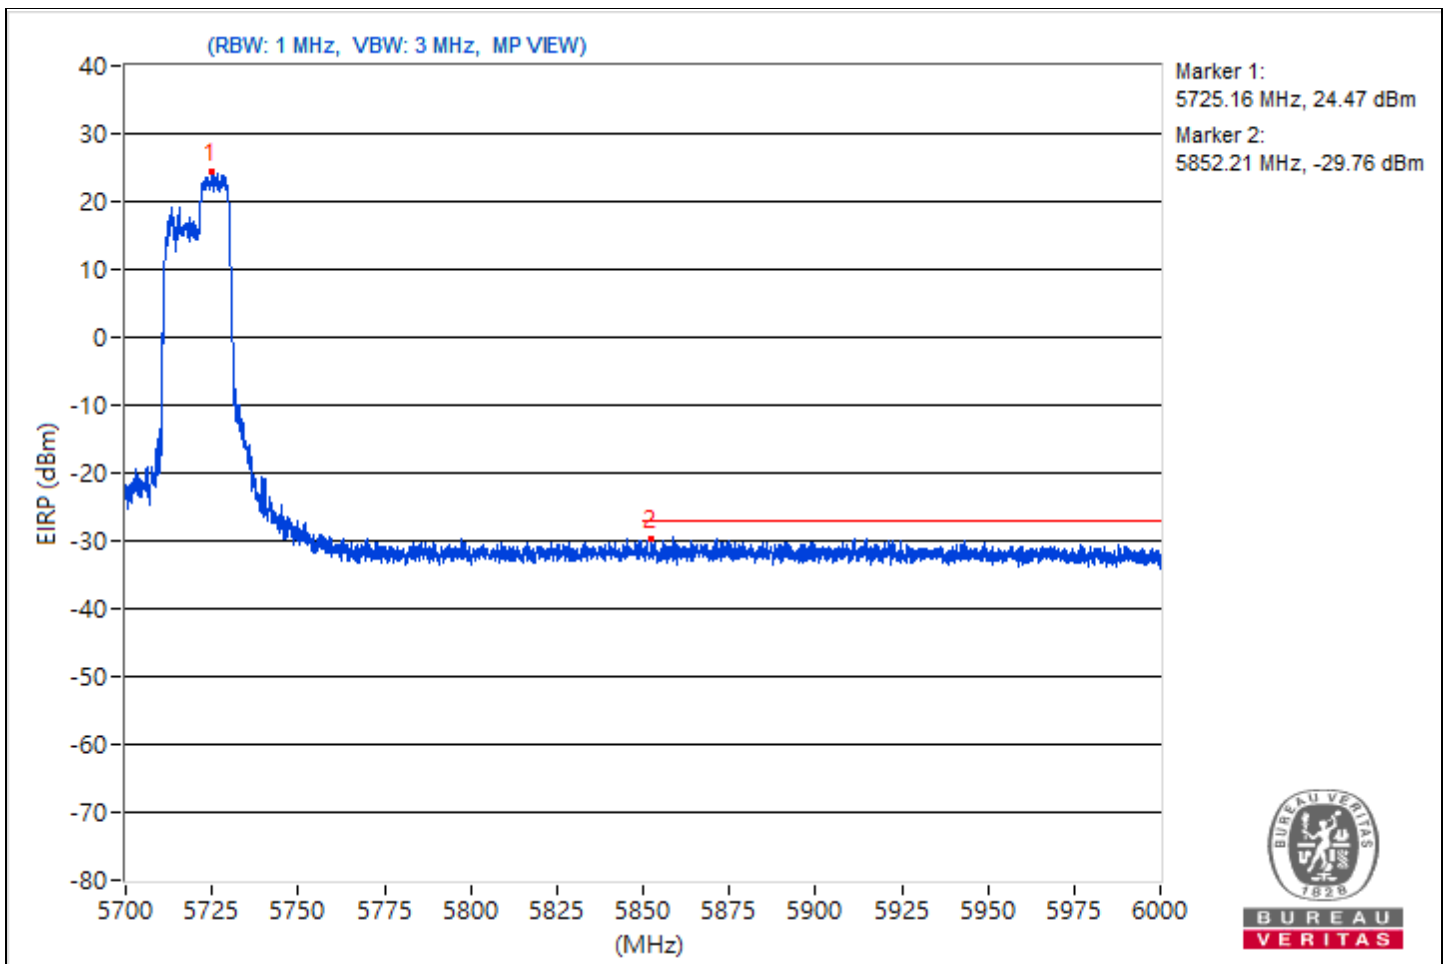


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5740.24	124.79			19.61	22.96	4.92	29.53
2	#5647.49	58.35	68.26	-9.91	-44.16	-45.64	4.92	-36.91
3	#5651.65	58.53	69.48	-10.95	-46.12	-43.57	4.92	-36.73
4	#5715.66	84.98	109.64	-24.66	-16	-22.93	4.92	-10.28
5	#5723.14	91.17	118.01	-26.84	-11.62	-12.46	4.92	-4.09
6	#5854.83	57.01	111.24	-54.23	-47.59	-45.12	4.92	-38.25
7	#5874.31	57.27	105.45	-48.18	-46.34	-45.53	4.92	-37.99
8	#5924.77	56.95	68.43	-11.48	-48.04	-44.98	4.92	-38.31
9	#5942.47	56.75	68.26	-11.51	-48.54	-45.03	4.92	-38.51

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

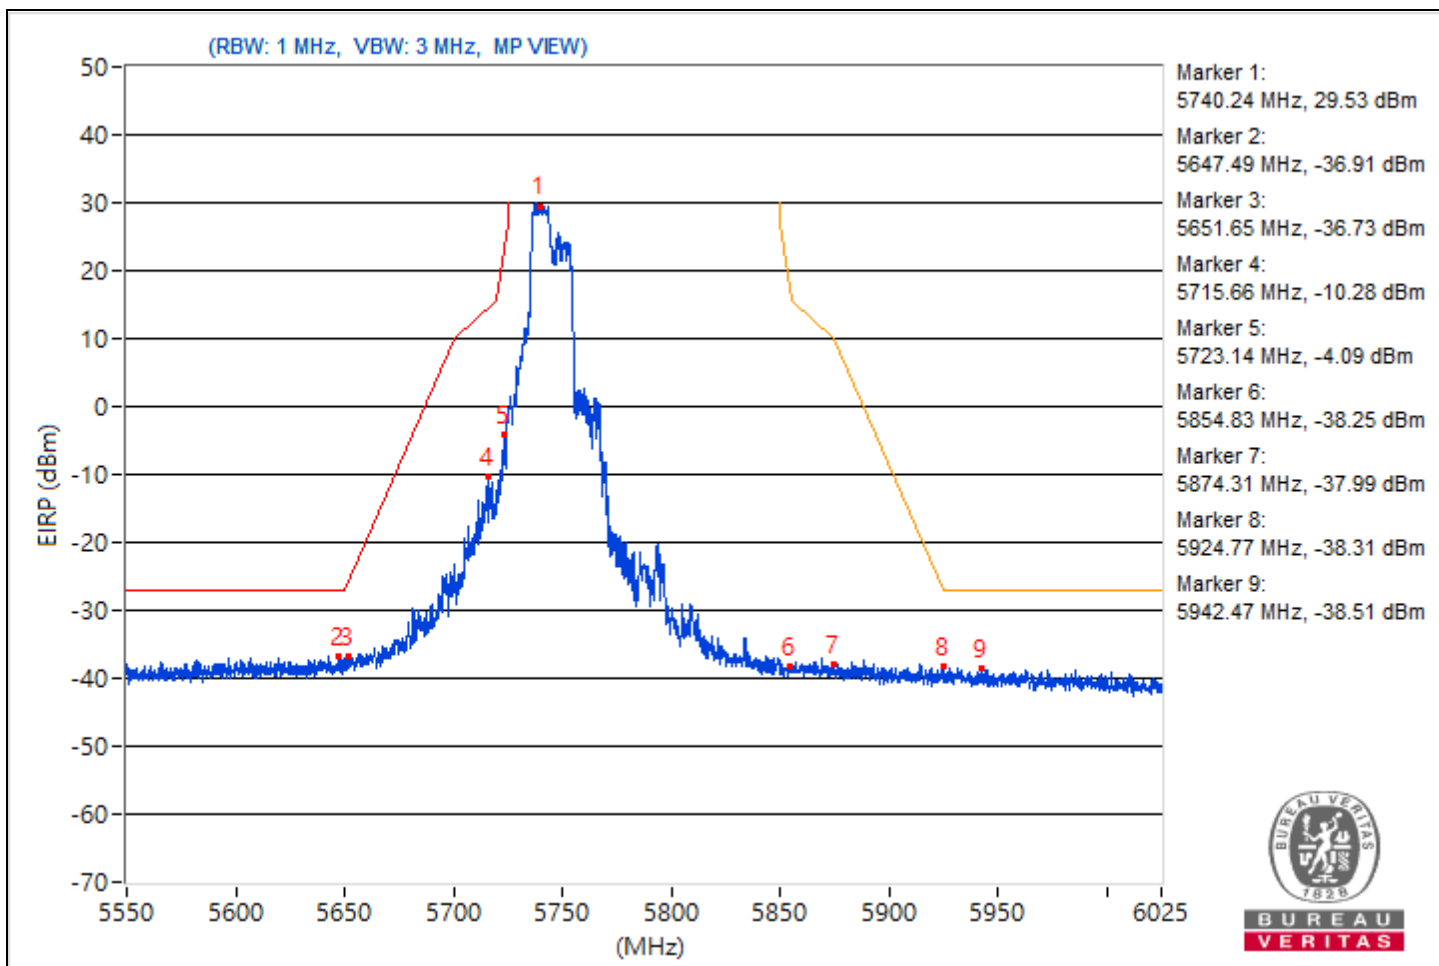


RF Mode	802.11ax (HE20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.46	125.25			20.18	23.37	4.92	29.99
2	#5614.12	56.99	68.26	-11.27	-49.04	-44.49	4.92	-38.27
3	#5649.99	56.26	68.26	-12	-46.39	-47.54	4.92	-39
4	#5701.88	57.36	105.79	-48.43	-44.92	-46.97	4.92	-37.9
5	#5720.05	57.17	110.97	-53.8	-45.81	-46.24	4.92	-38.09
6	#5854.71	83.87	111.52	-27.65	-21.48	-17.89	4.92	-11.39
7	#5857.56	84.33	110.14	-25.81	-24.67	-16.46	4.92	-10.93
8	#5924.77	57.35	68.43	-11.08	-46.17	-45.53	4.92	-37.91
9	#5930.12	59.73	68.26	-8.53	-45.34	-42.15	4.92	-35.53

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

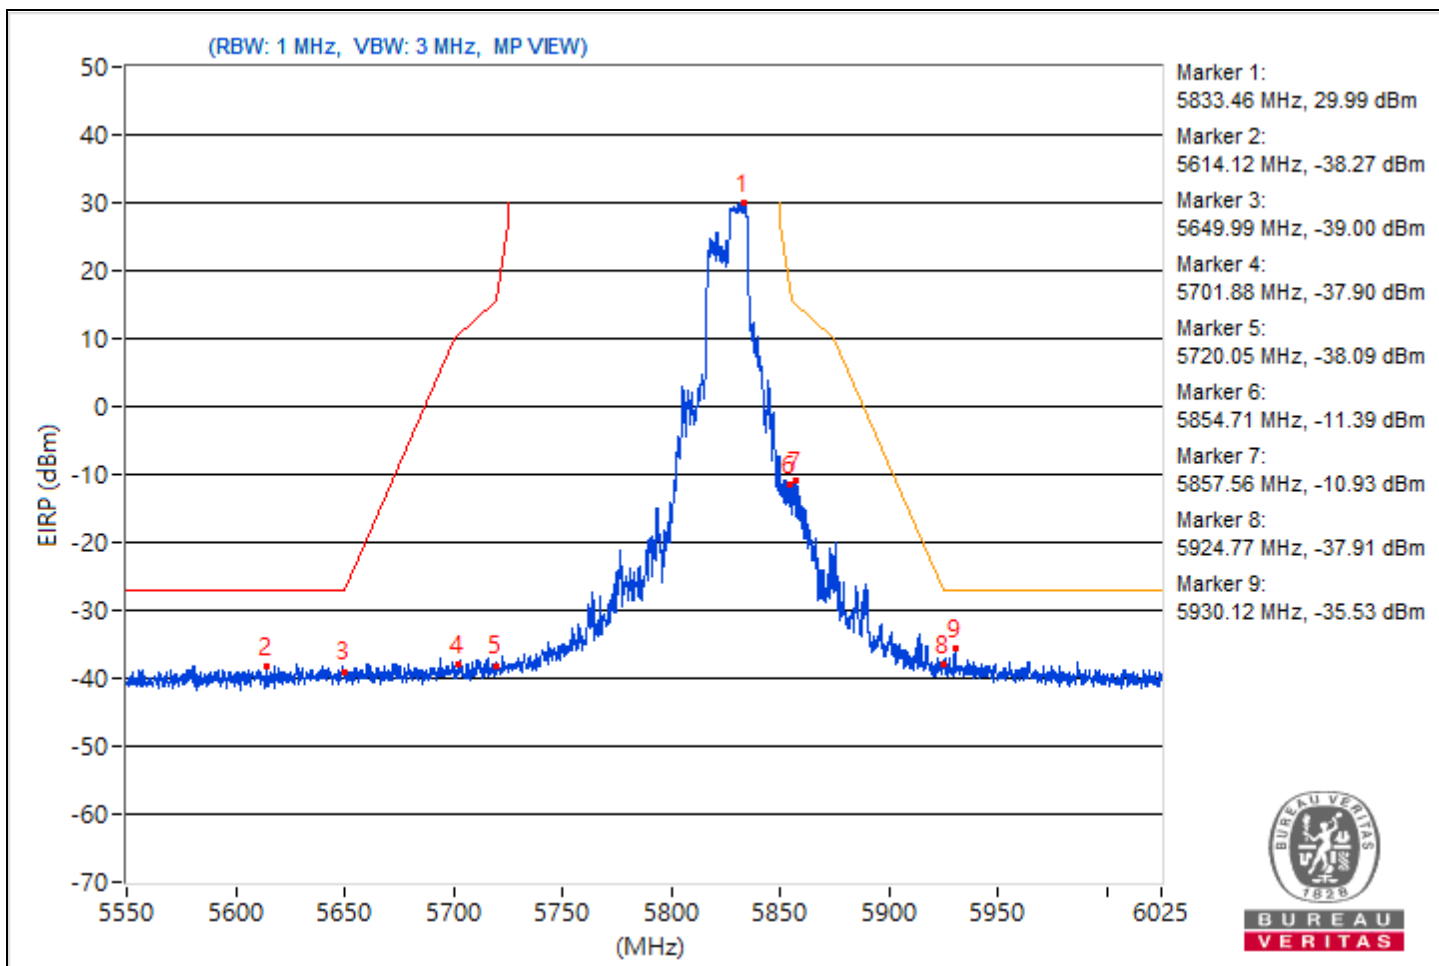


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.4	118.86 PK			13.71	17.01	4.92	23.6
2	*5172	110 AV			6.5	7.1	4.92	14.74
3	5054.73	66.72 PK	74	-7.28	-38.39	-35.15	4.92	-28.54
4	5127.35	46.68 AV	54	-7.32	-56.31	-56.71	4.92	-48.58

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

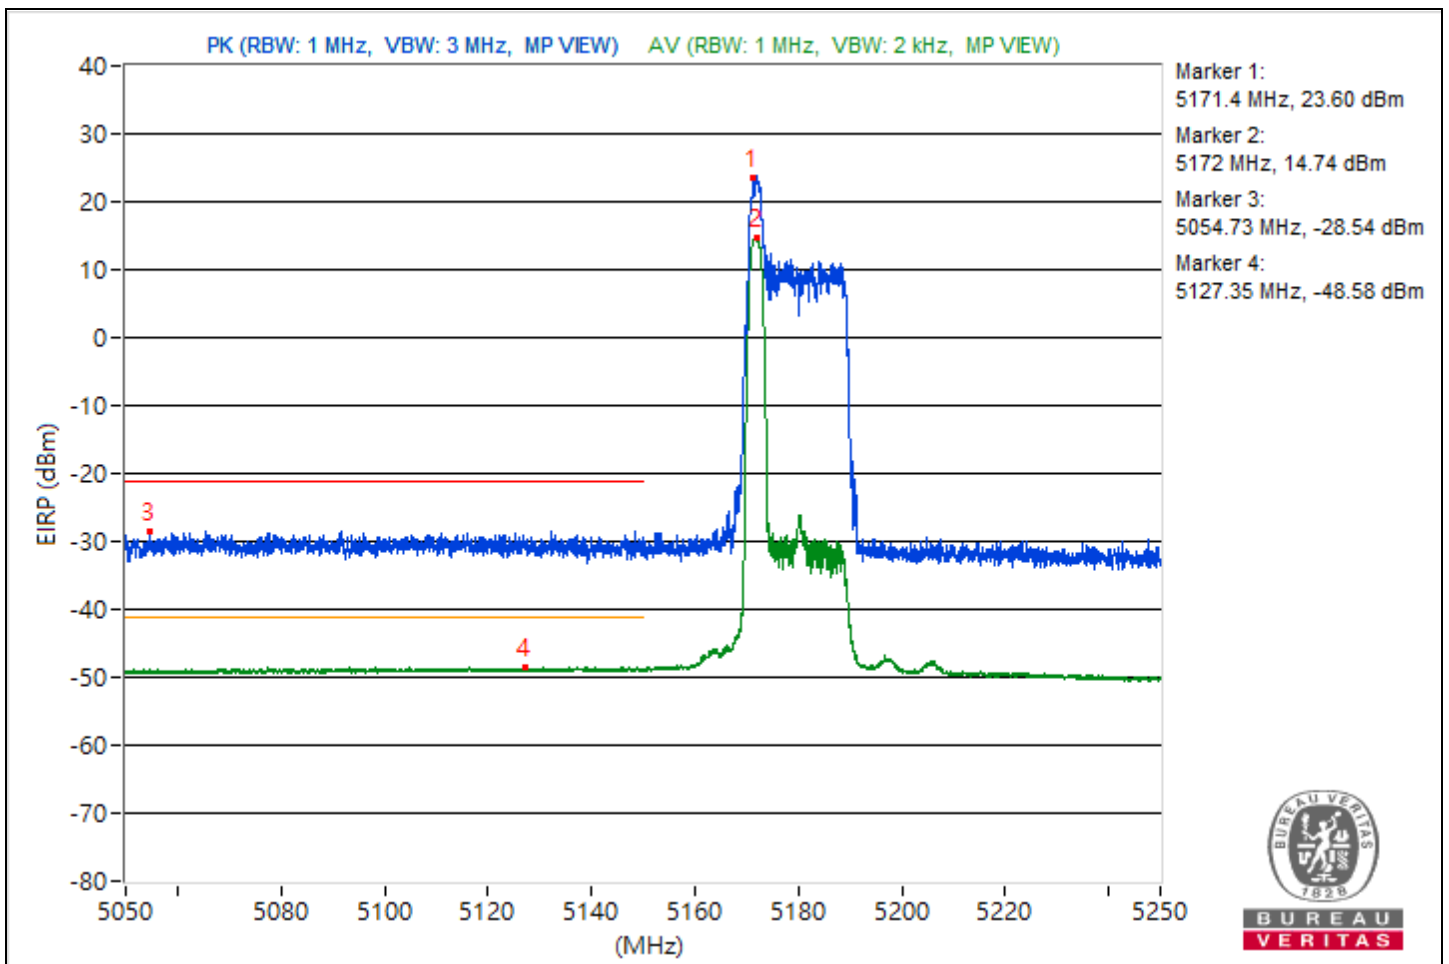


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5736.79	129.1			26.25	25.55	4.92	33.84
2	#5635.02	58.98	68.26	-9.28	-43.43	-45.16	4.92	-36.28
3	#5650.58	56.98	68.69	-11.71	-45.5	-47.05	4.92	-38.28
4	#5701.29	92.84	105.62	-12.78	-20.33	-7.56	4.92	-2.42
5	#5724.8	90.52	121.8	-31.28	-18.49	-10.27	4.92	-4.74
6	#5854.71	57.23	111.52	-54.29	-46.55	-45.44	4.92	-38.03
7	#5874.19	57.14	105.49	-48.35	-47.37	-45.04	4.92	-38.12
8	#5924.18	56.63	68.87	-12.24	-46.74	-46.38	4.92	-38.63
9	#6020.61	56.67	68.26	-11.59	-45.23	-48.38	4.92	-38.59

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

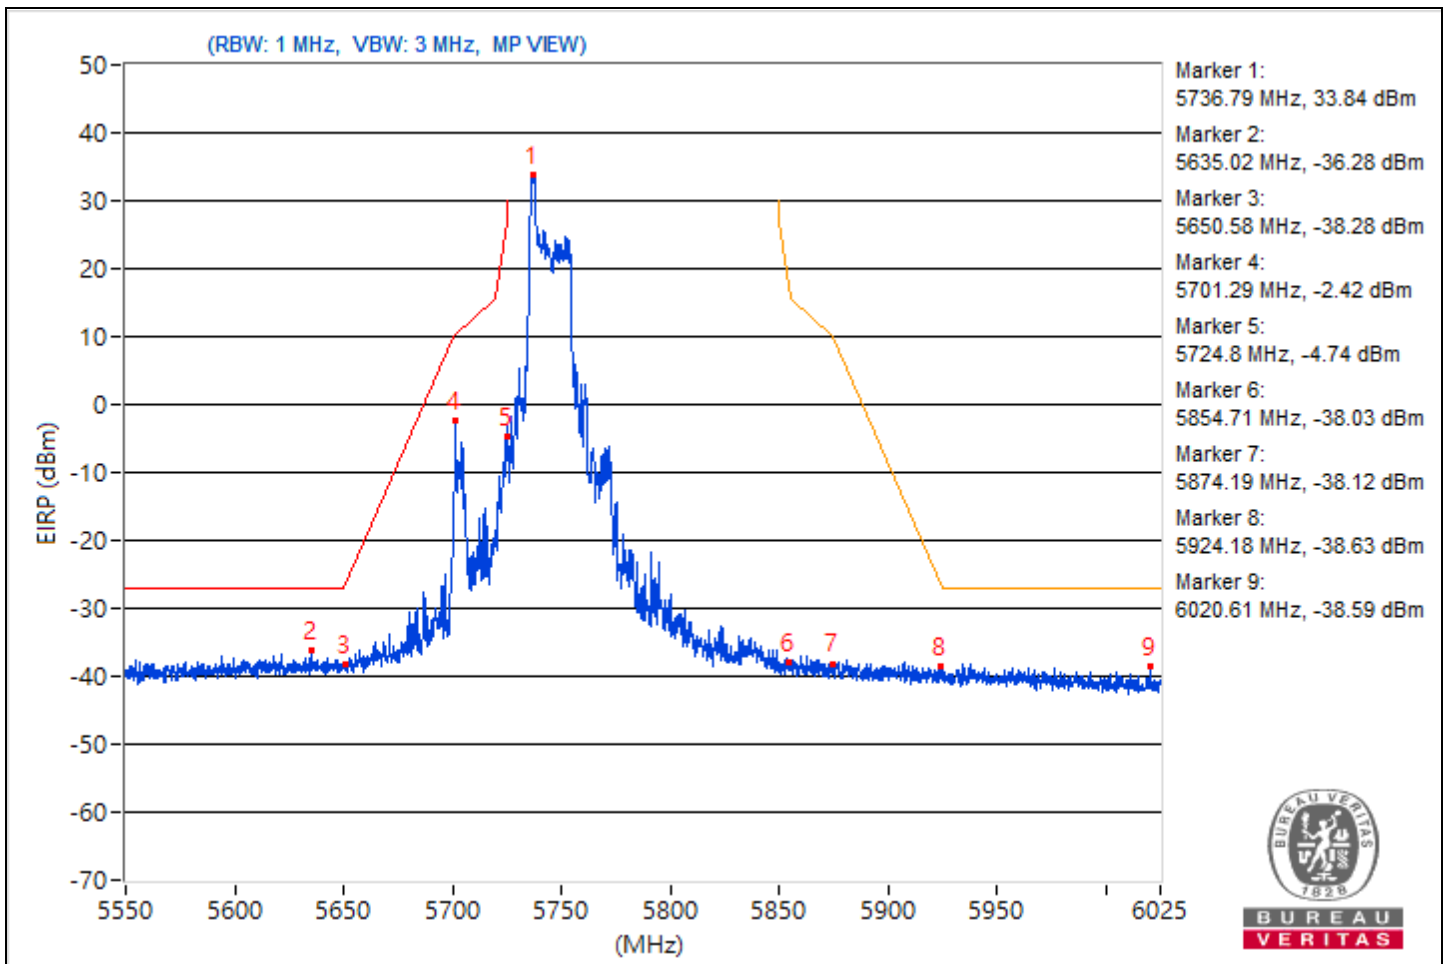


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5834.41	128.97			25.67	25.9	4.92	33.71
2	#5631.34	57.23	68.26	-11.03	-45.24	-46.82	4.92	-38.03
3	#5650.82	56.24	68.87	-12.63	-46.98	-46.92	4.92	-39.02
4	#5700.81	57.79	105.49	-47.7	-45.83	-45.02	4.92	-37.47
5	#5720.29	58.05	111.52	-53.47	-44	-46.7	4.92	-37.21
6	#5852.34	86.02	116.93	-30.91	-14.25	-30.92	4.92	-9.24
7	#5867.06	89.43	107.48	-18.05	-15.75	-12.41	4.92	-5.83
8	#5924.3	57.73	68.78	-11.05	-44.91	-46.09	4.92	-37.53
9	#5949.71	57.38	68.26	-10.88	-47.61	-44.55	4.92	-37.88

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

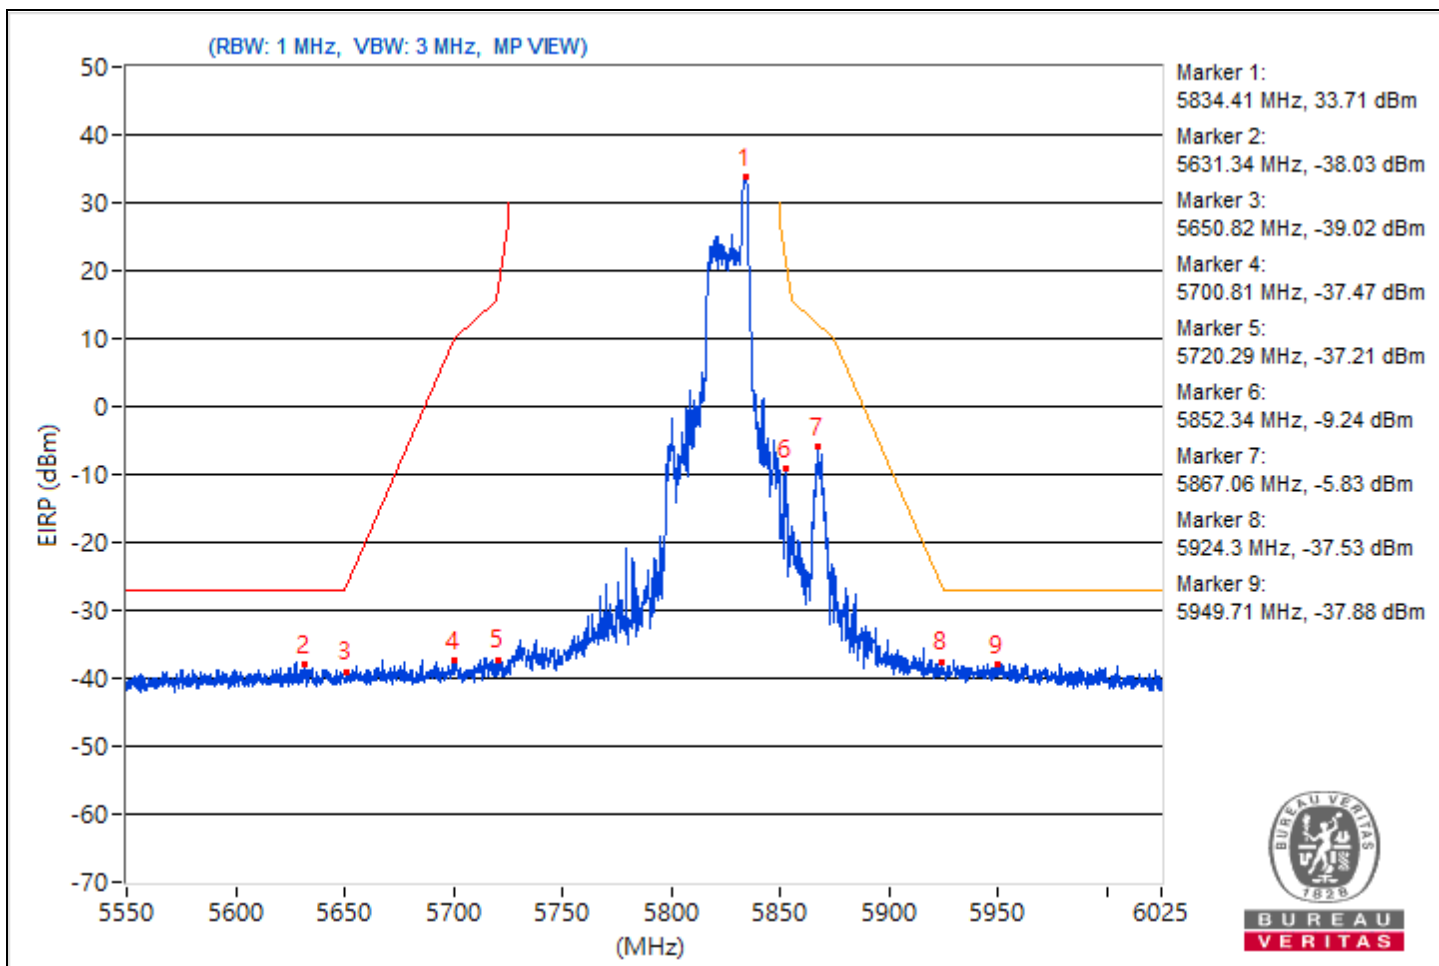


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5172.62	119.14 PK			14.5	17.04	4.92	23.88
2	*5172.8	109.86 AV			6.48	6.86	4.92	14.6
3	5105.57	66.73 PK	74	-7.27	-38.83	-34.93	4.92	-28.53
4	5141.68	47.71 AV	54	-6.29	-55.24	-55.74	4.92	-47.55

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

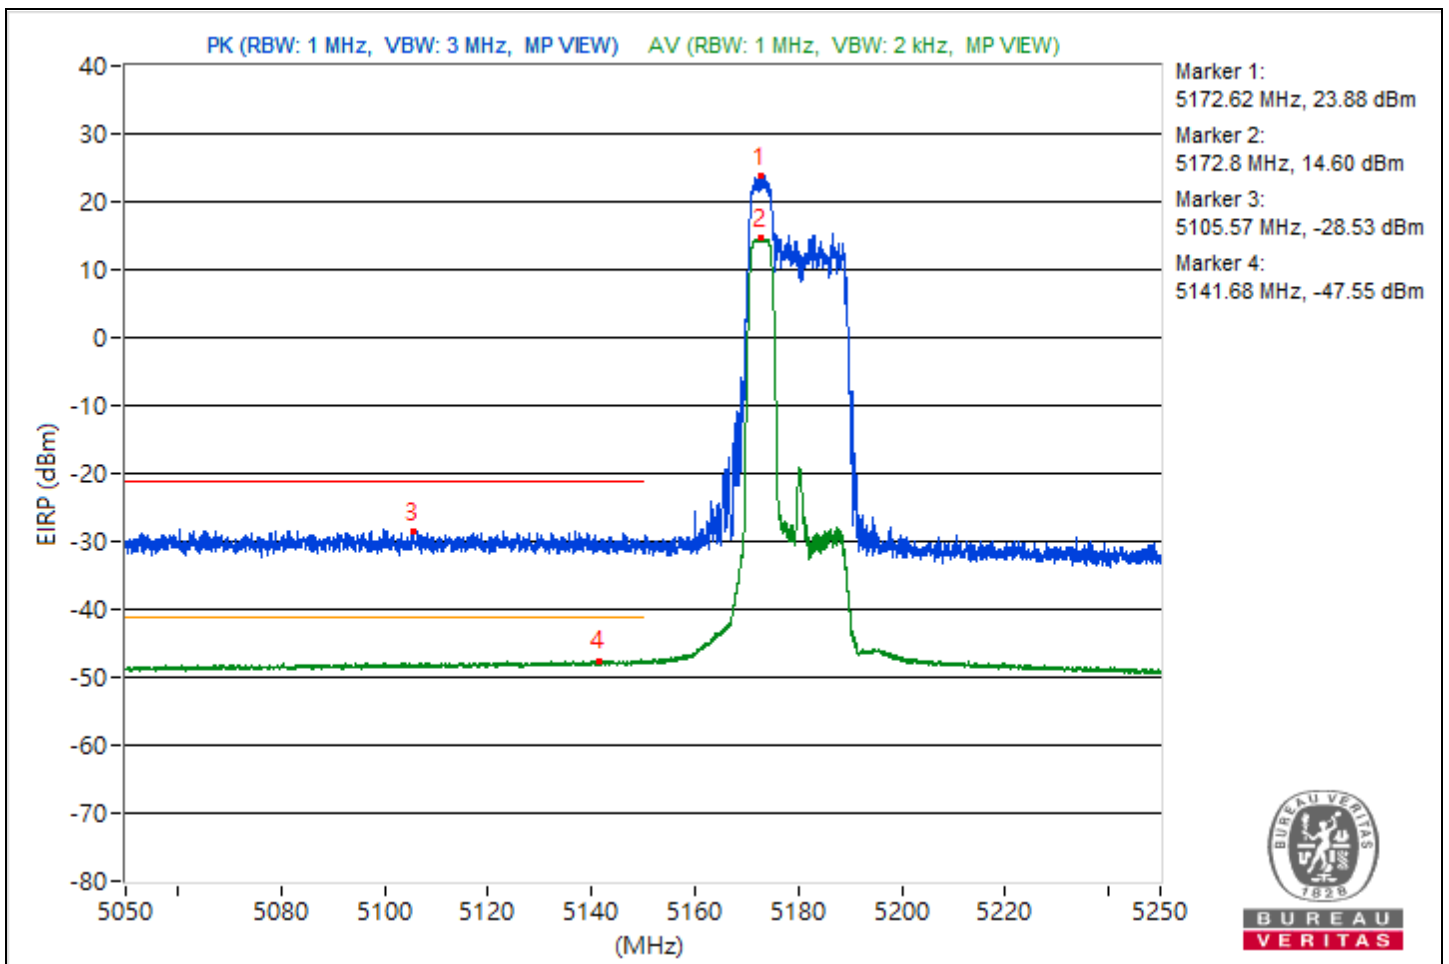


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5737.03	127.91			23.19	25.84	4.92	32.65
2	#5649.39	58.37	68.26	-9.89	-44.13	-45.65	4.92	-36.89
3	#5650.11	57.68	68.34	-10.66	-46.73	-44.56	4.92	-37.58
4	#5708.77	85.19	107.72	-22.53	-15.9	-22.24	4.92	-10.07
5	#5721.48	84.87	114.22	-29.35	-18.99	-17.75	4.92	-10.39
6	#5854.48	57.49	112.06	-54.57	-46.1	-45.34	4.92	-37.77
7	#5872.52	57.5	105.95	-48.45	-46.6	-44.93	4.92	-37.76
8	#5924.66	56.52	68.51	-11.99	-47.46	-46.01	4.92	-38.74
9	#5942.71	57.47	68.26	-10.79	-48.35	-44.1	4.92	-37.79

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

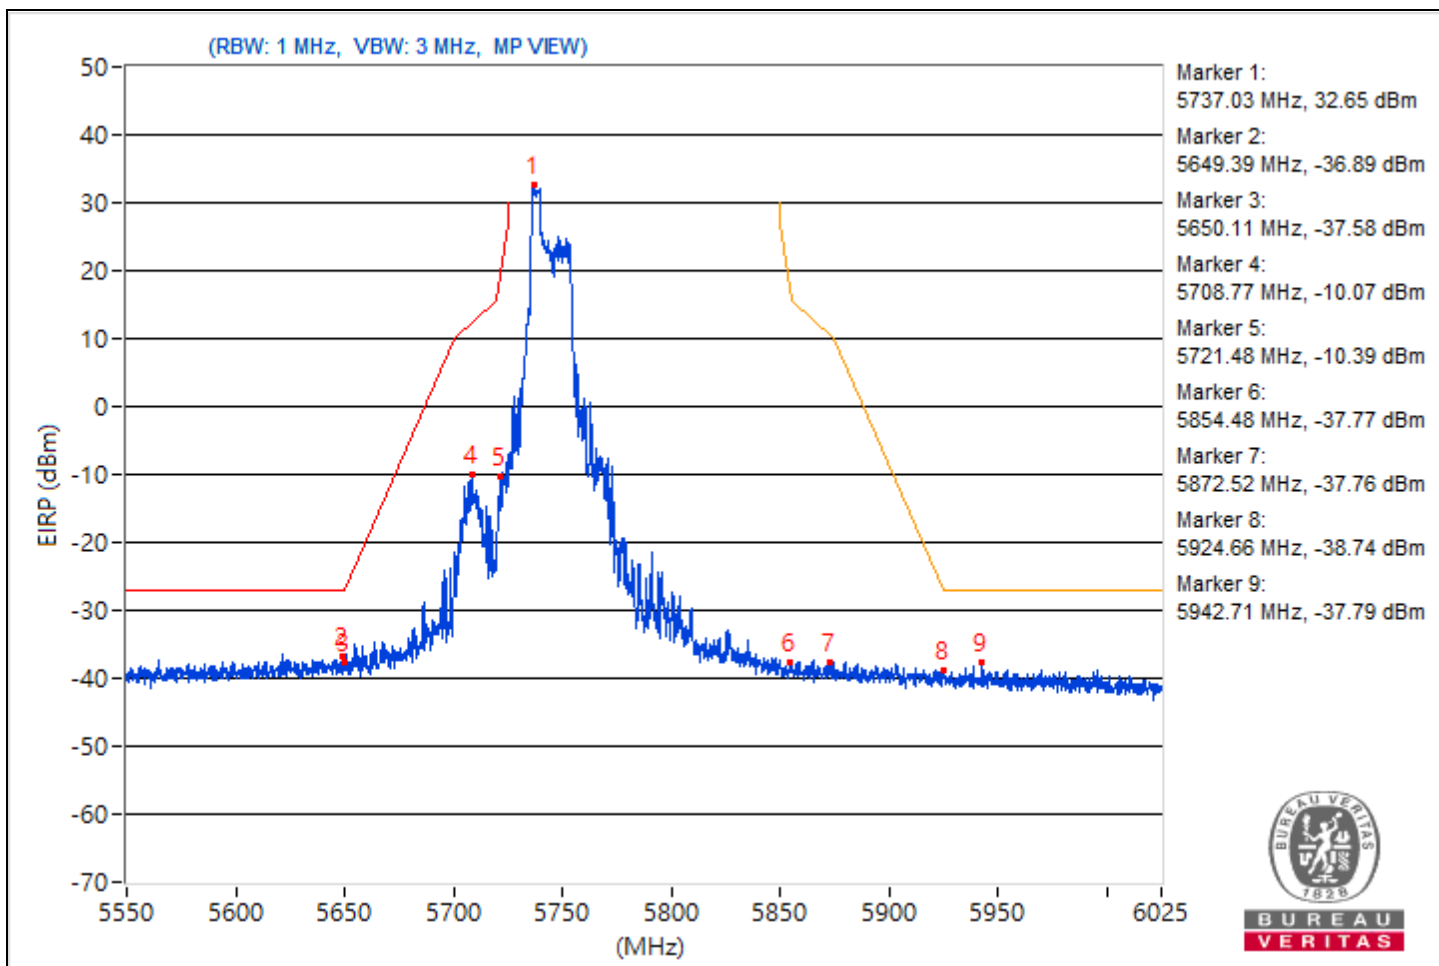




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5833.22	127.25			23.08	24.86	4.92	31.99
2	#5623.51	57.54	68.26	-10.72	-44.64	-46.97	4.92	-37.72
3	#5650.58	56.53	68.69	-12.16	-46.79	-46.54	4.92	-38.73
4	#5700.81	57.61	105.49	-47.88	-45.03	-46.2	4.92	-37.65
5	#5720.29	57.29	111.52	-54.23	-46.37	-45.47	4.92	-37.97
6	#5852.1	86.82	117.47	-30.65	-13.41	-32.29	4.92	-8.44
7	#5865.04	87.86	108.05	-20.19	-12.83	-21.85	4.92	-7.4
8	#5924.66	57.34	68.51	-11.17	-47.48	-44.67	4.92	-37.92
9	#5925.49	58.58	68.26	-9.68	-46.73	-43.2	4.92	-36.68

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

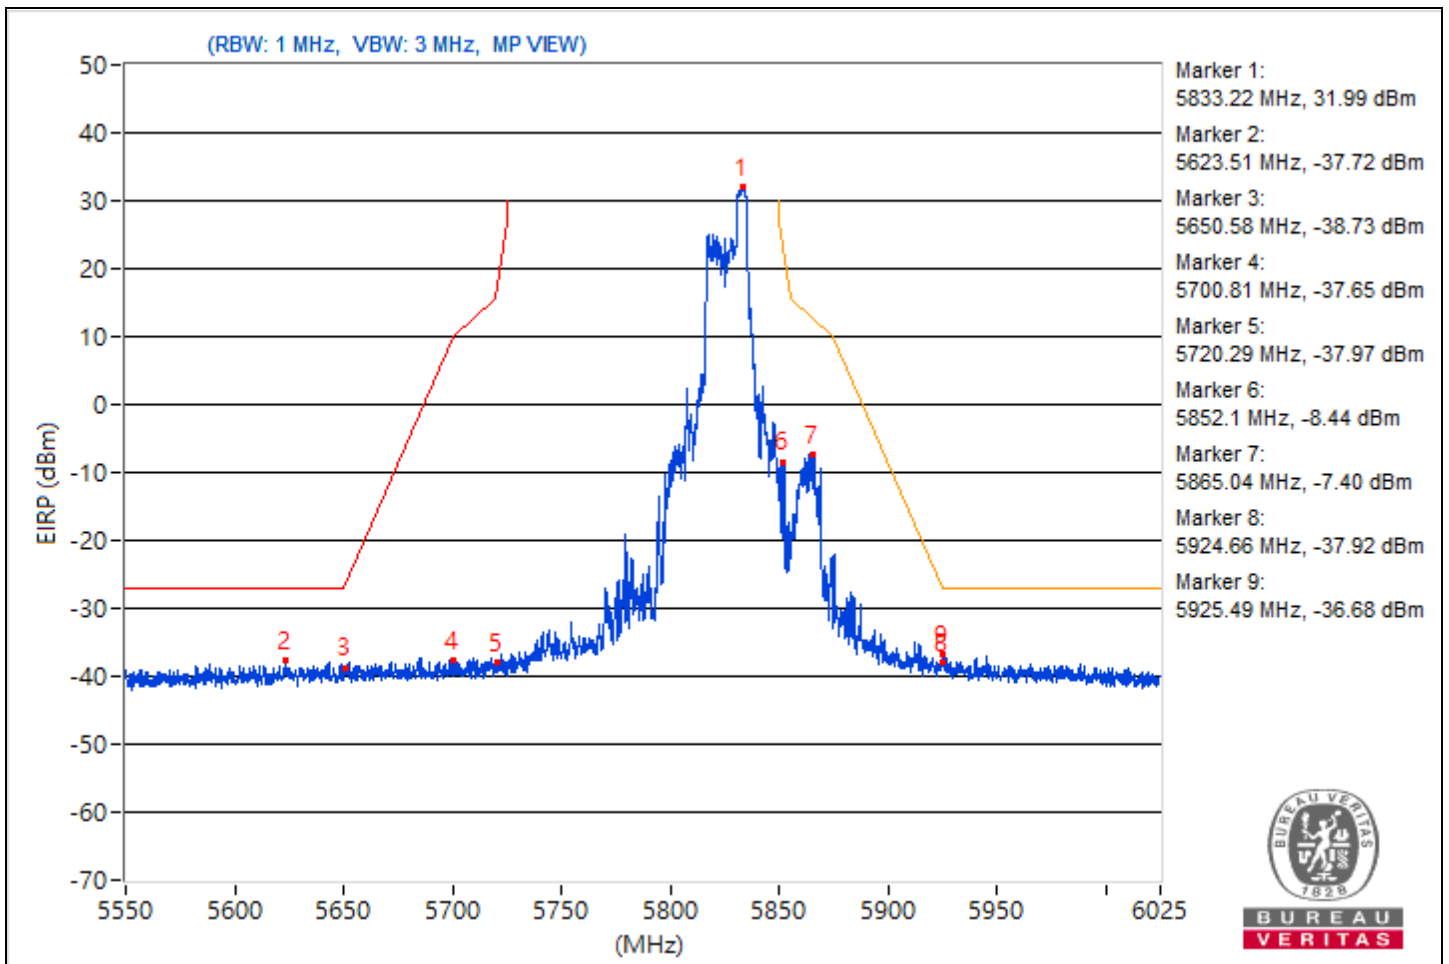


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5171.4	118.89 PK			12.98	17.36	4.92	23.63
2	*5171.8	109.82 AV			6.79	6.46	4.92	14.56
3	5104.82	66.93 PK	74	-7.07	-35.15	-37.75	4.92	-28.33
4	5148.5	49.18 AV	54	-4.82	-53.7	-54.35	4.92	-46.08

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

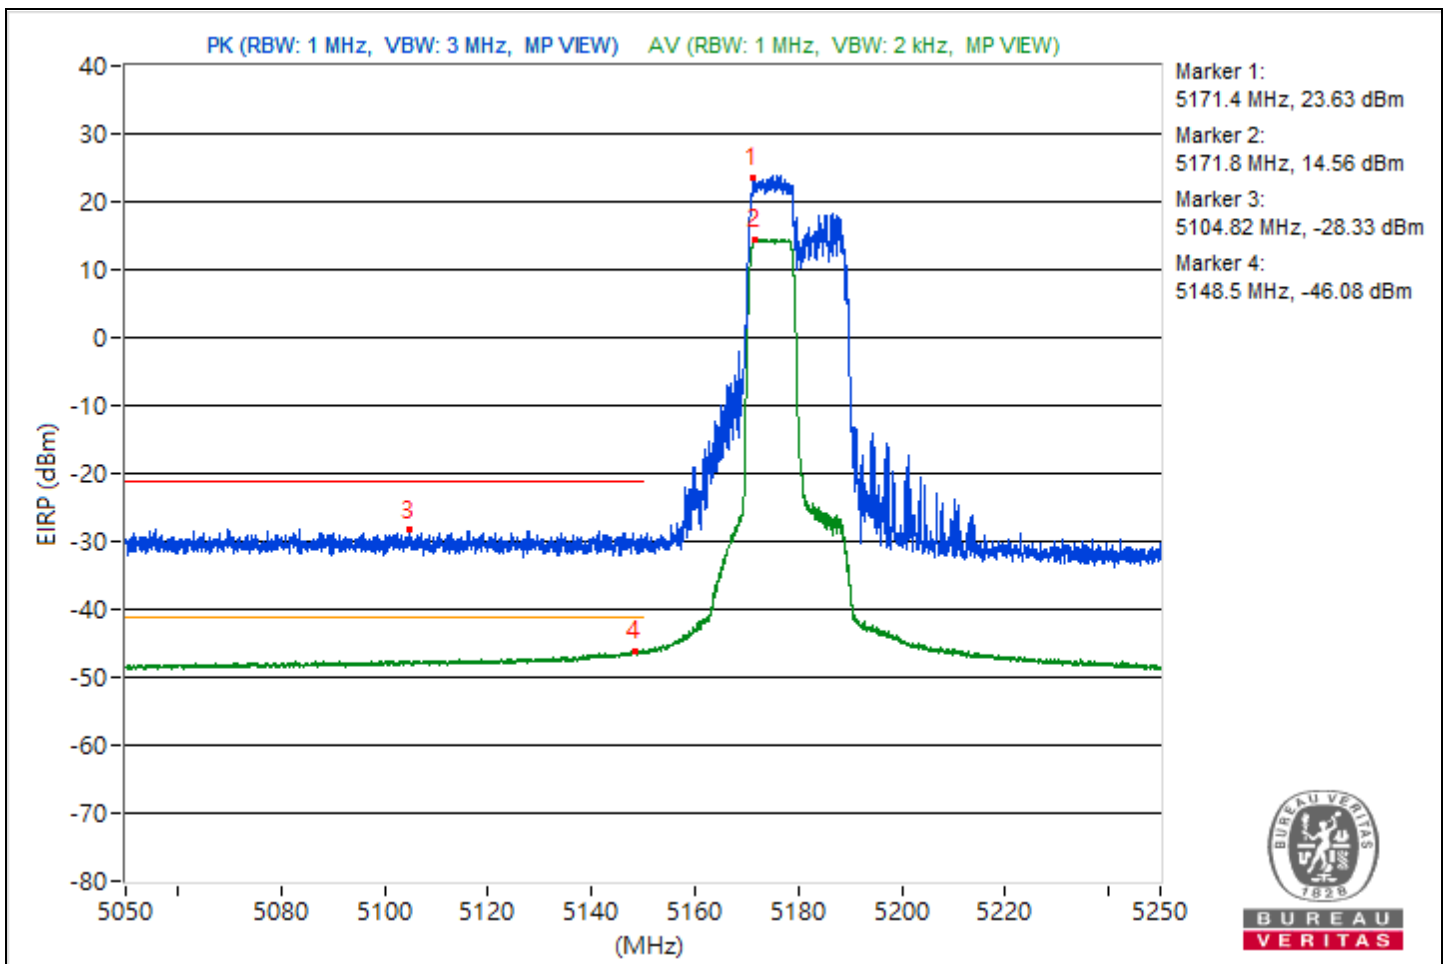


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5741.54	124.42			20.27	22.01	4.92	29.16
2	#5590.73	58.66	68.26	-9.6	-42.89	-47.2	4.92	-36.6
3	#5654.5	59.58	71.59	-12.01	-42.23	-45.63	4.92	-35.68
4	#5718.15	85.57	110.34	-24.77	-15.58	-21.6	4.92	-9.69
5	#5722.19	86.83	115.85	-29.02	-14.13	-21.18	4.92	-8.43
6	#5854.24	57.49	112.6	-55.11	-44.81	-46.83	4.92	-37.77
7	#5868.73	58.2	107.02	-48.82	-44.42	-45.64	4.92	-37.06
8	#5923.35	55.71	69.48	-13.77	-48.5	-46.65	4.92	-39.55
9	#5946.74	56.9	68.26	-11.36	-45.16	-47.83	4.92	-38.36

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

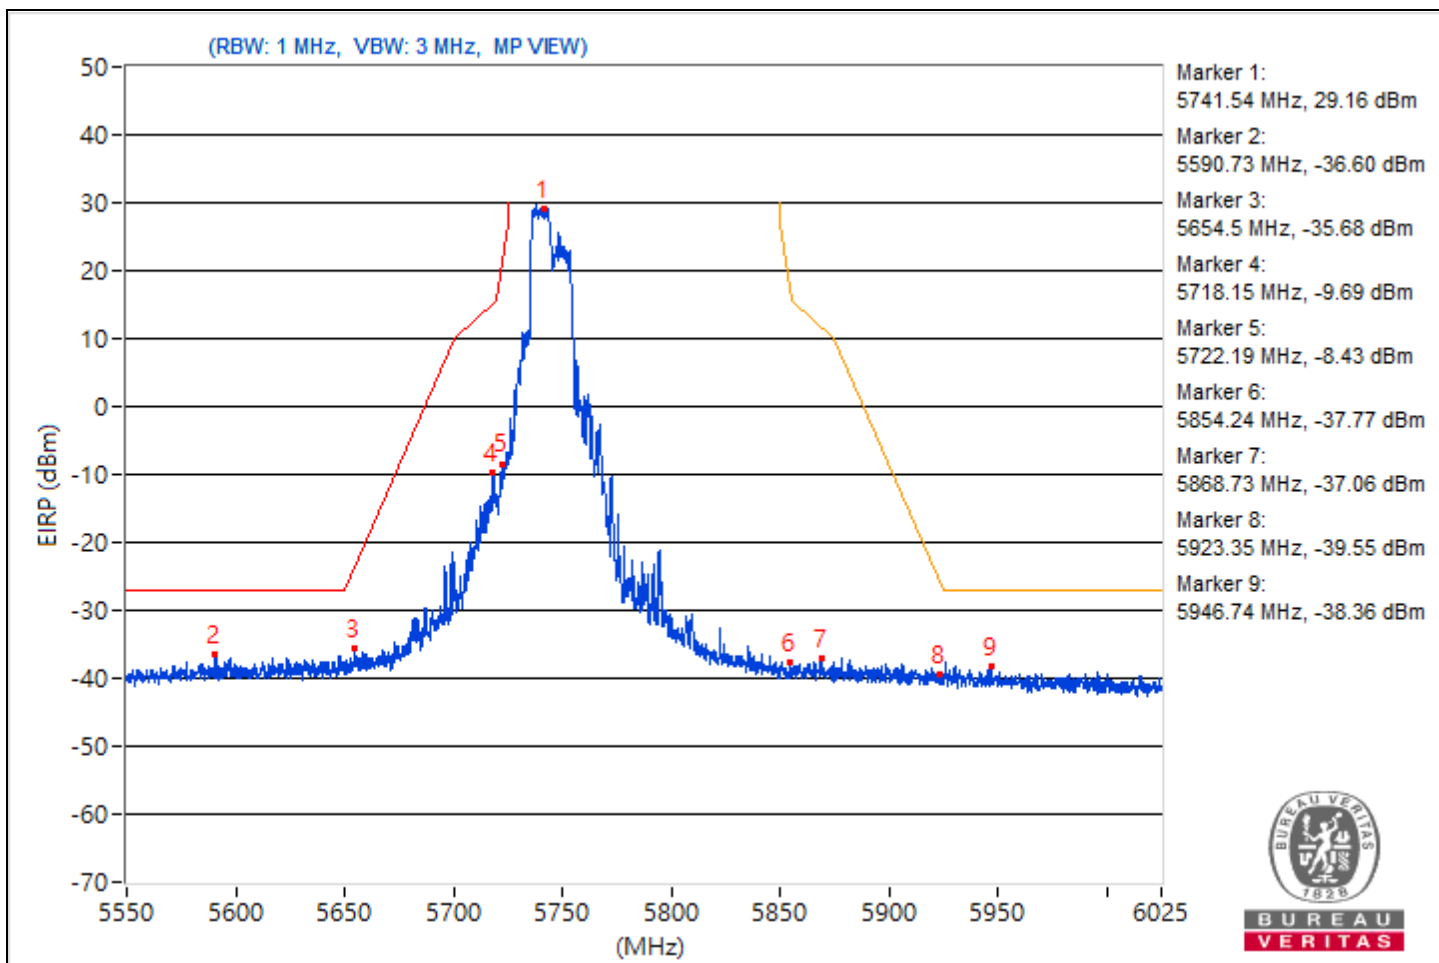


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5830.49	125.88			23.93	20.97	4.92	30.62
2	#5603.32	57.67	68.26	-10.59	-44.14	-47.55	4.92	-37.59
3	#5650.82	56.19	68.87	-12.68	-47.11	-46.9	4.92	-39.07
4	#5701.52	57.87	105.69	-47.82	-46.92	-44.15	4.92	-37.39
5	#5720.41	56.37	111.79	-55.42	-46.12	-47.67	4.92	-38.89
6	#5853.52	87.33	114.22	-26.89	-20.31	-13.7	4.92	-7.93
7	#5855.78	82.63	110.64	-28.01	-23.18	-18.94	4.92	-12.63
8	#5924.06	57.27	68.95	-11.68	-47.19	-44.94	4.92	-37.99
9	#5948.76	57.97	68.26	-10.29	-43.81	-47.31	4.92	-37.29

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

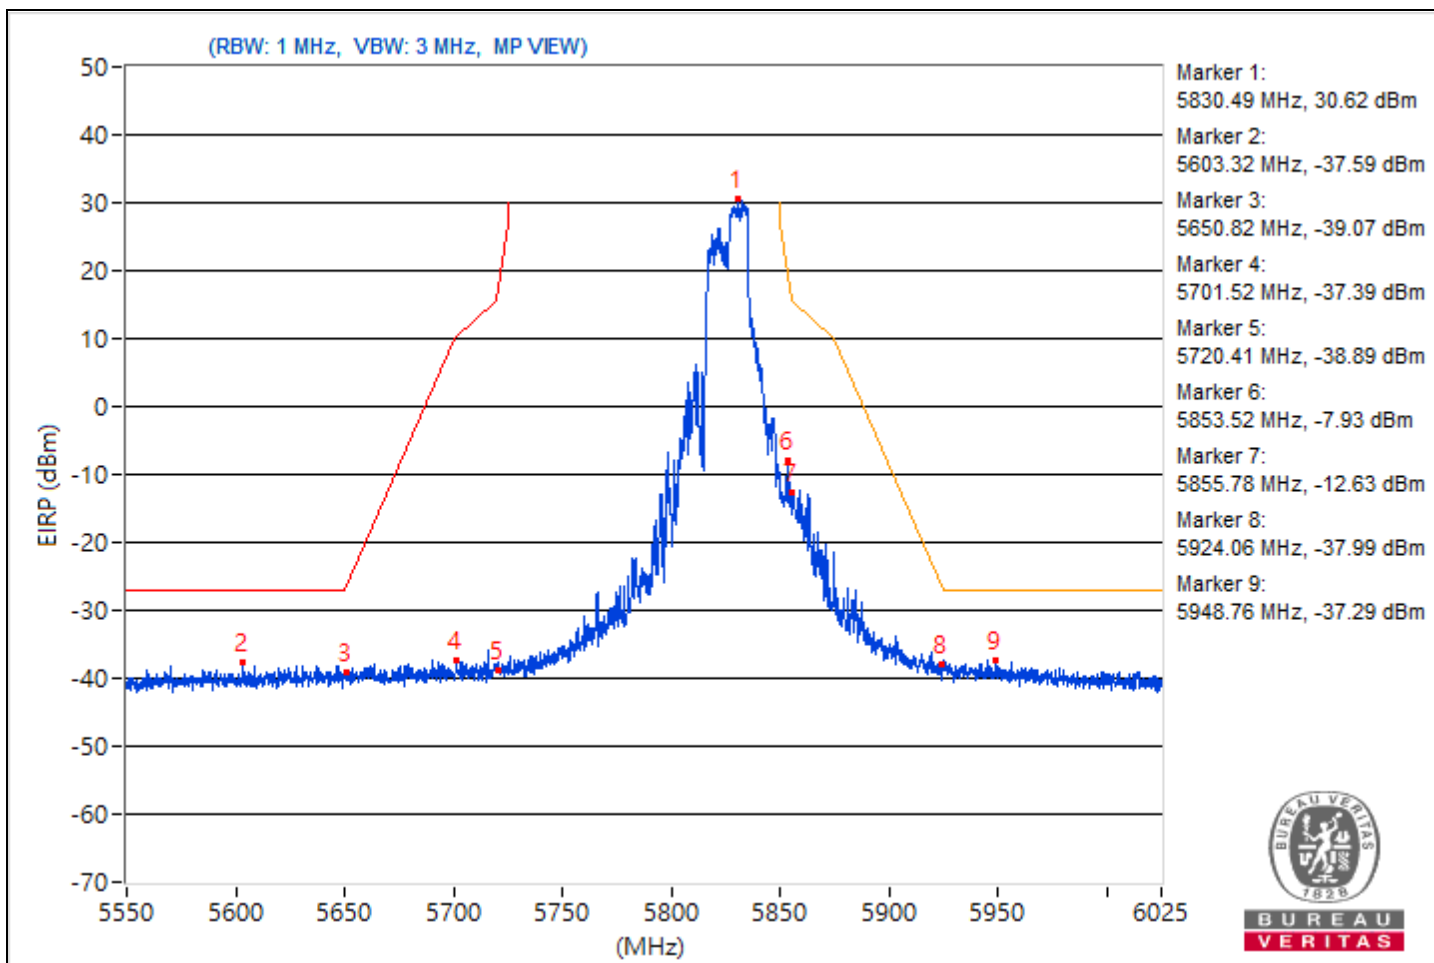


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5175.93	119.01 PK			14.15	17.02	4.92	23.75
2	*5176.93	110.01 AV			6.64	7	4.92	14.75
3	5071.62	67.63 PK	74	-6.37	-38.55	-33.81	4.92	-27.63
4	5149.7	48.16 AV	54	-5.84	-54.78	-55.29	4.92	-47.1

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

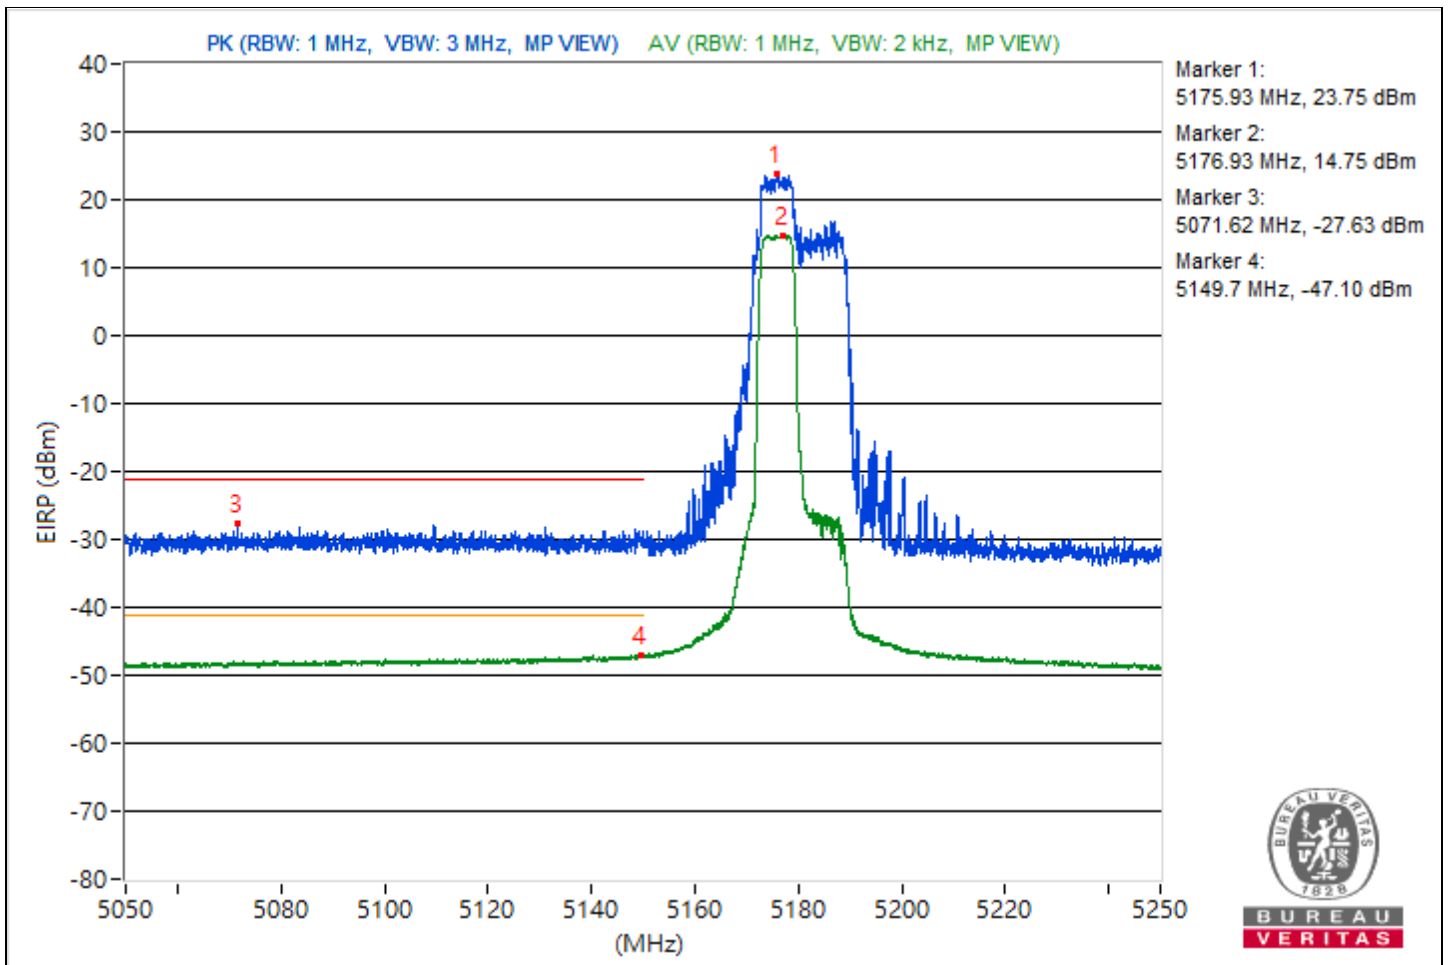


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5741.43	126.63			21.76	24.65	4.92	31.37
2	#5645	58.72	68.26	-9.54	-44.92	-44.06	4.92	-36.54
3	#5654.14	60.01	71.33	-11.32	-46.66	-41.27	4.92	-35.25
4	#5718.27	84.82	110.38	-25.56	-15.76	-25.88	4.92	-10.44
5	#5720.52	84.73	112.06	-27.33	-20.11	-17.26	4.92	-10.53
6	#5854.71	58.01	111.52	-53.51	-44.53	-45.95	4.92	-37.25
7	#5872.41	57	105.99	-48.99	-45.07	-47.72	4.92	-38.26
8	#5924.42	56.09	68.69	-12.6	-46.67	-47.56	4.92	-39.17
9	#5948.76	56.75	68.26	-11.51	-44.82	-49.07	4.92	-38.51

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

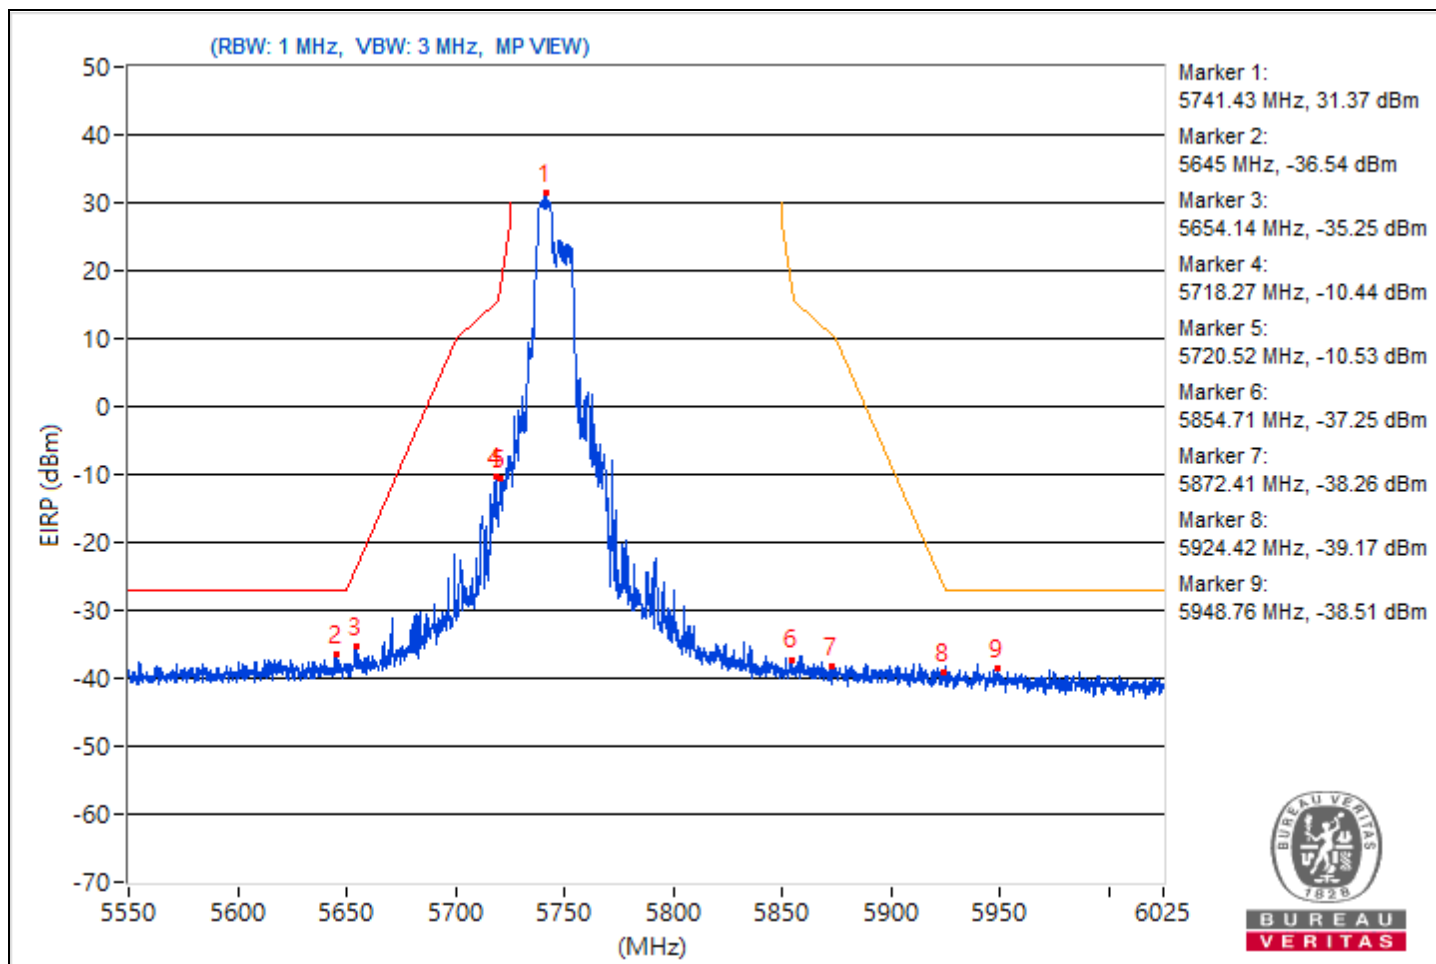




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5830.96	126.29			23.98	21.99	4.92	31.03
2	#5647.97	57.16	68.26	-11.1	-47.75	-44.8	4.92	-38.1
3	#5650.94	56.54	68.95	-12.41	-49.28	-45.02	4.92	-38.72
4	#5709.24	57.15	107.85	-50.7	-44.62	-48.14	4.92	-38.11
5	#5720.76	57.31	112.6	-55.29	-47.33	-44.8	4.92	-37.95
6	#5851.98	86.04	117.74	-31.7	-14.59	-24.21	4.92	-9.22
7	#5855.07	80.87	110.84	-29.97	-20.73	-24.85	4.92	-14.39
8	#5923.47	56.26	69.39	-13.13	-46.51	-47.4	4.92	-39
9	#5937.12	58.58	68.26	-9.68	-45.2	-44.1	4.92	-36.68

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

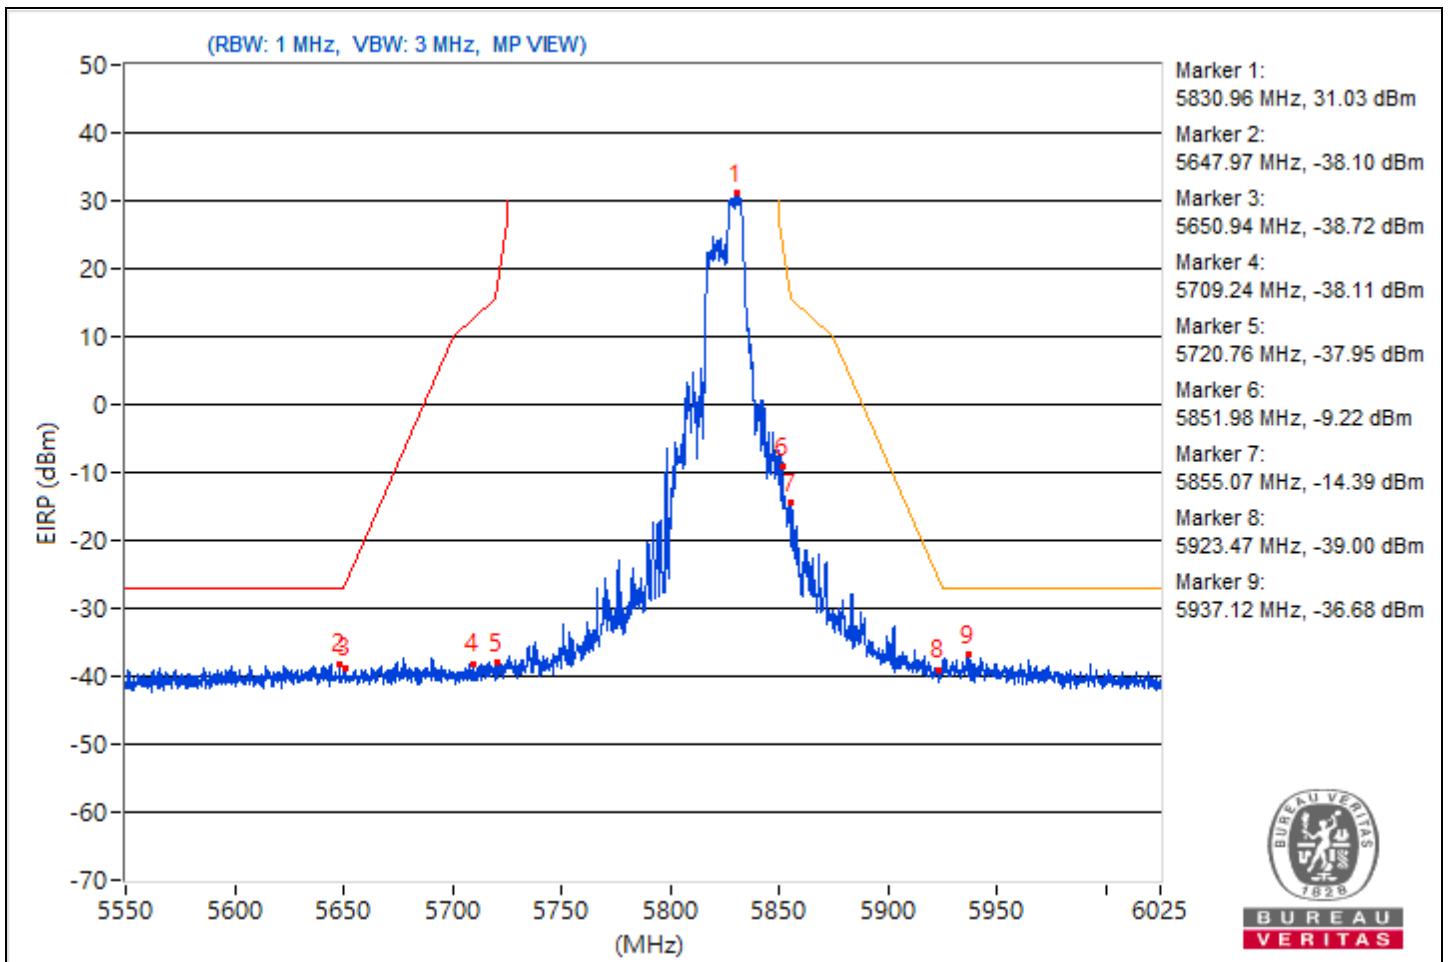


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5175.87	118.8 PK			14.4	16.55	4.92	23.54
2	*5179.15	109.64 AV			6.27	6.62	4.92	14.38
3	5053.35	67.33 PK	74	-6.67	-39	-34.06	4.92	-27.93
4	5149	48.79 AV	54	-5.21	-54.23	-54.57	4.92	-46.47

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

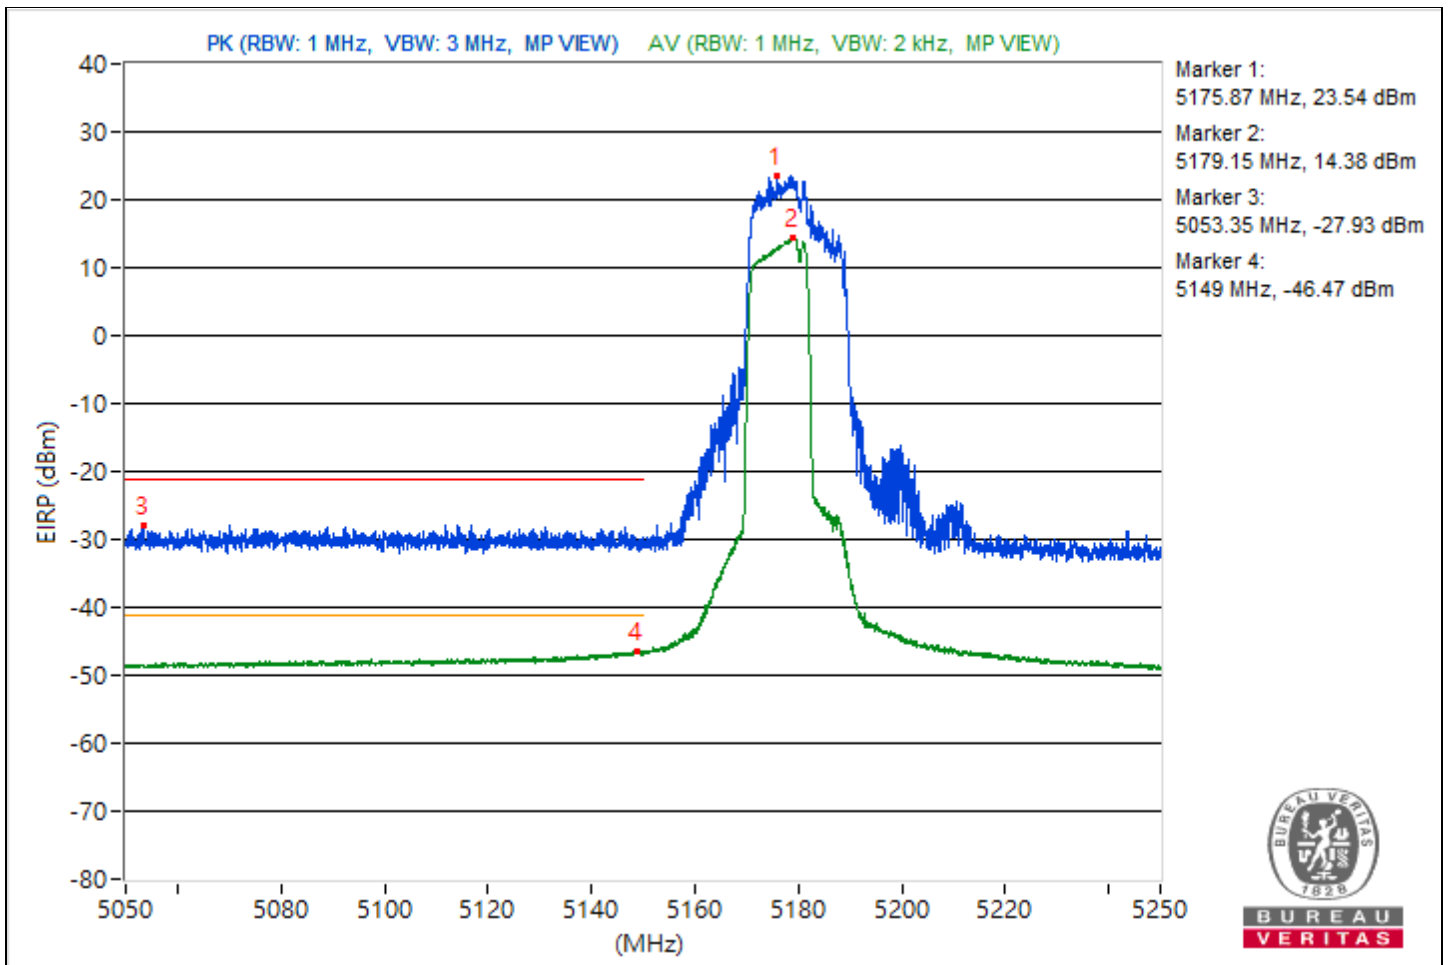




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5744.63	125.28			22.75	21.32	4.92	30.02
2	#5645.59	58.74	68.26	-9.52	-46.02	-43.29	4.92	-36.52
3	#5652.6	58.17	70.18	-12.01	-44.29	-45.9	4.92	-37.09
4	#5719.57	84.85	110.74	-25.89	-19.14	-17.67	4.92	-10.41
5	#5721.83	87.95	115.04	-27.09	-14.9	-15.6	4.92	-7.31
6	#5854.83	56.91	111.24	-54.33	-46.12	-46.44	4.92	-38.35
7	#5872.64	56.01	105.92	-49.91	-46.23	-48.39	4.92	-39.25
8	#5924.18	55.35	68.87	-13.52	-49.11	-46.86	4.92	-39.91
9	#5926.56	56.34	68.26	-11.92	-48.26	-45.79	4.92	-38.92

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

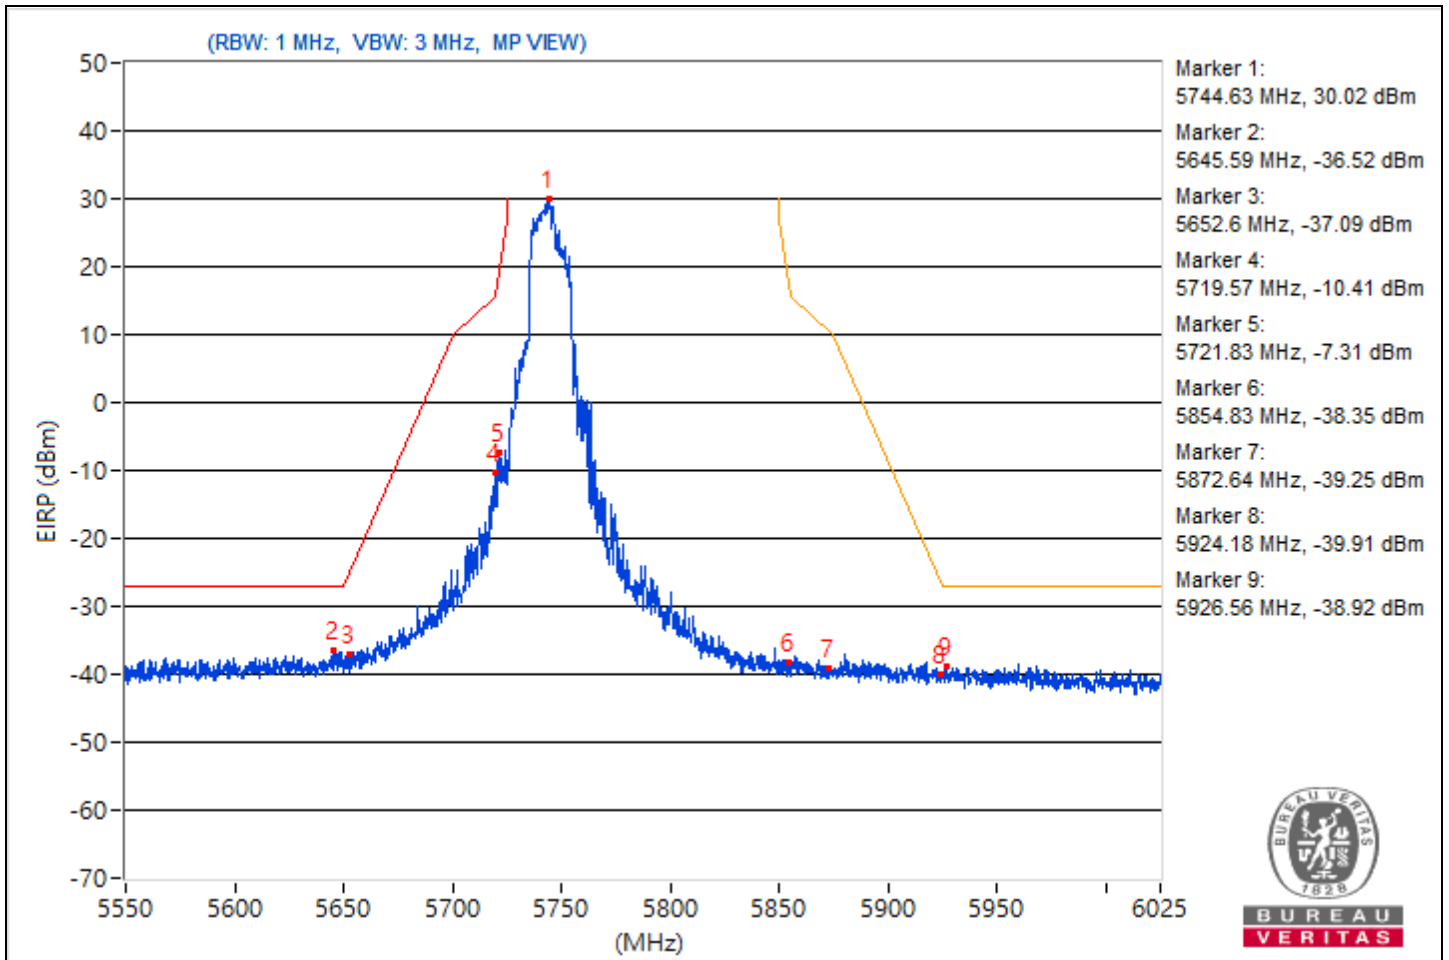




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.93	124.76			20.96	22.1	4.92	29.5
2	#5635.74	57.01	68.26	-11.25	-47.58	-45.12	4.92	-38.25
3	#5651.18	56.18	69.13	-12.95	-45.92	-48.46	4.92	-39.08
4	#5704.97	57.19	106.65	-49.46	-47.61	-44.83	4.92	-38.07
5	#5720.17	56.8	111.24	-54.44	-46.06	-46.75	4.92	-38.46
6	#5854.48	83.65	112.06	-28.41	-18.55	-20.83	4.92	-11.61
7	#5855.31	79.87	110.77	-30.9	-21.38	-26.93	4.92	-15.39
8	#5923.94	57.28	69.04	-11.76	-47.21	-44.91	4.92	-37.98
9	#5925.73	58.65	68.26	-9.61	-43.79	-45.44	4.92	-36.61

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

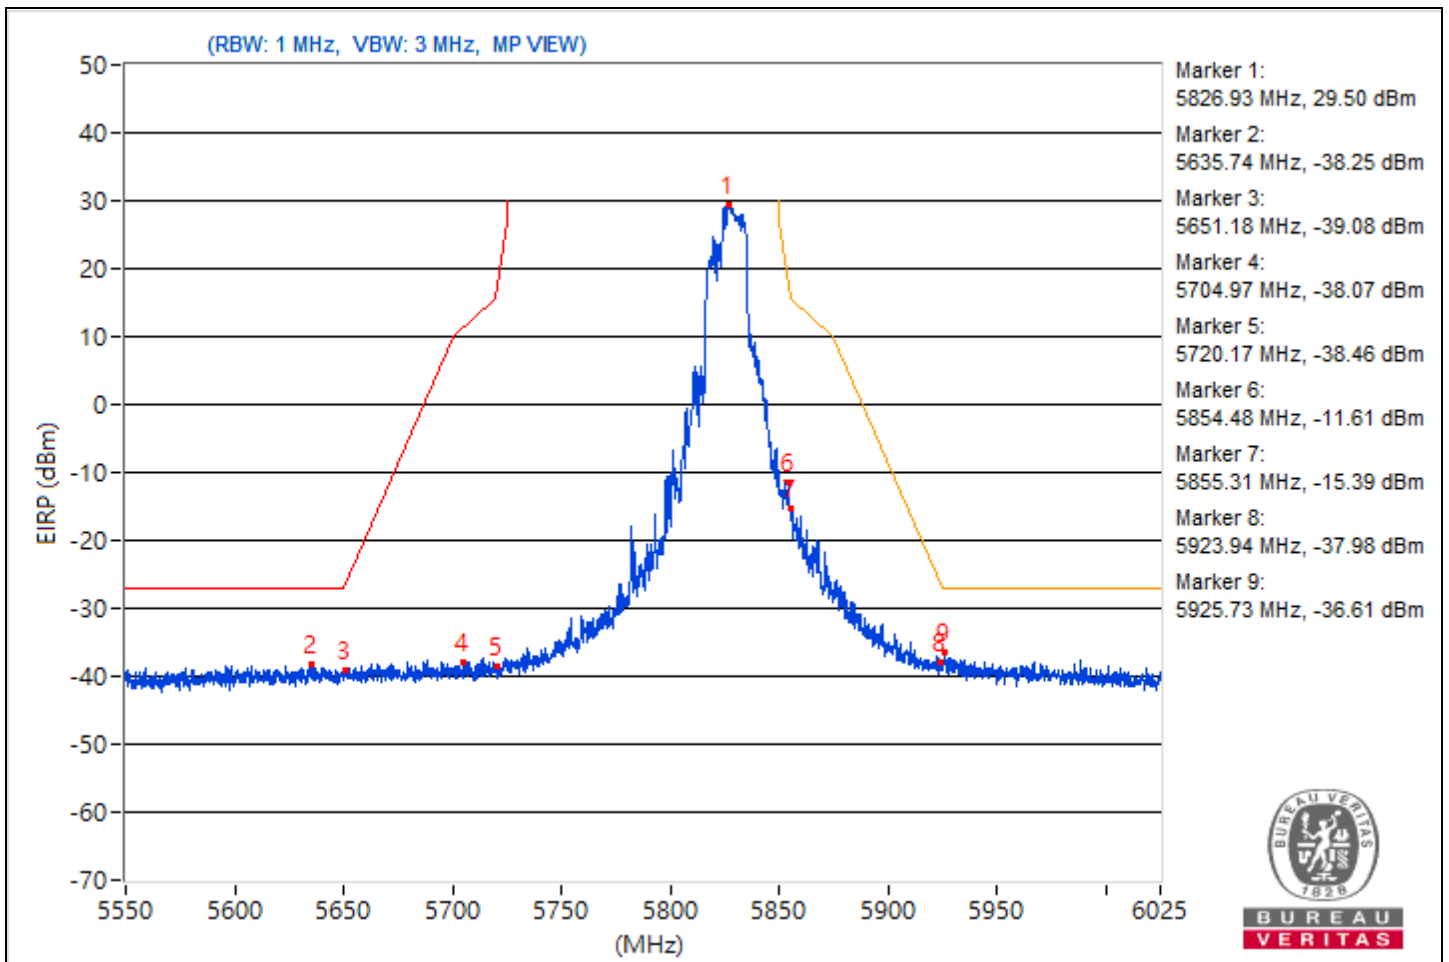


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5205.85	109.25 PK			7.64	3.54	4.92	13.99
2	*5207.9	99.23 AV			-3.88	-4.03	4.92	3.97
3	5104.57	66.58 PK	74	-7.42	-39.77	-34.8	4.92	-28.68
4	5149.2	48.13 AV	54	-5.87	-55.34	-54.8	4.92	-47.13

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

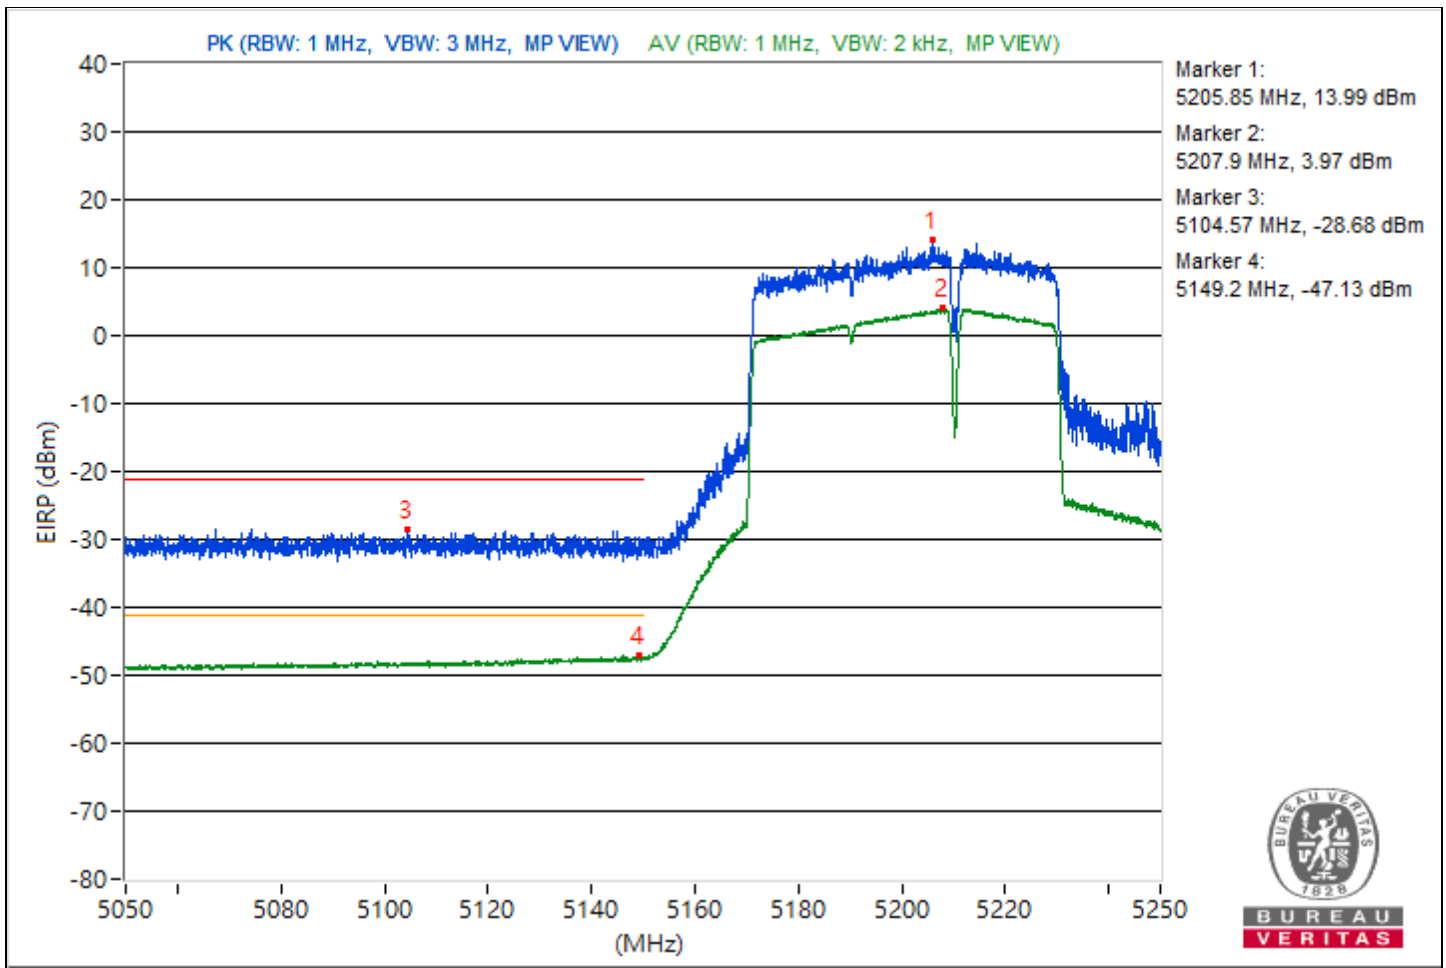




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	5.55 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5779.07	113.66			7.93	12.07	4.92	18.4
2	#5648.92	59.24	68.26	-9.02	-43.48	-44.48	4.92	-36.02
3	#5651.18	58.97	69.13	-10.16	-47.11	-42.5	4.92	-36.29
4	#5717.32	78.47	110.11	-31.64	-25.5	-24.06	4.92	-16.79
5	#5720.05	77.26	110.97	-33.71	-24.24	-28.73	4.92	-18
6	#5854.12	61.79	112.87	-51.08	-40.48	-42.56	4.92	-33.47
7	#5873.12	61.75	105.79	-44.04	-44.96	-39.53	4.92	-33.51
8	#5923.23	56.32	69.57	-13.25	-46.41	-47.38	4.92	-38.94
9	#5936.65	57.08	68.26	-11.18	-47	-45.38	4.92	-38.18

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

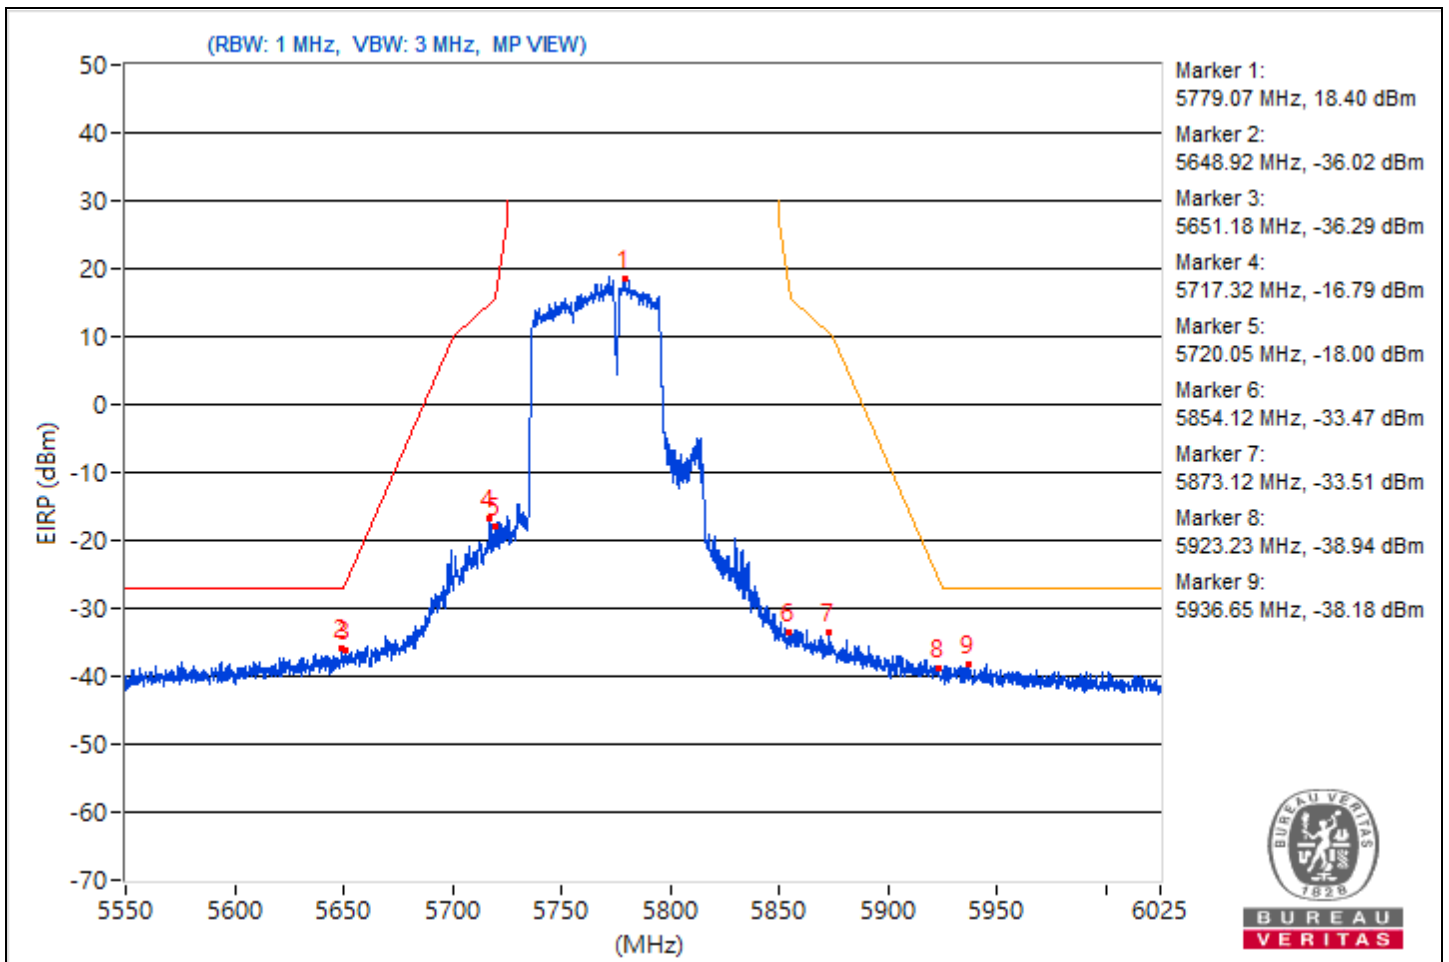


**Mode B  
For 1TX**

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.7 PK	68.2	-19.5	3.55 H	61	32.8	15.9
2	15540.00	47.8 PK	74.0	-26.2	1.41 H	152	31.3	16.5
3	15540.00	35.9 AV	54.0	-18.1	1.41 H	152	19.4	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

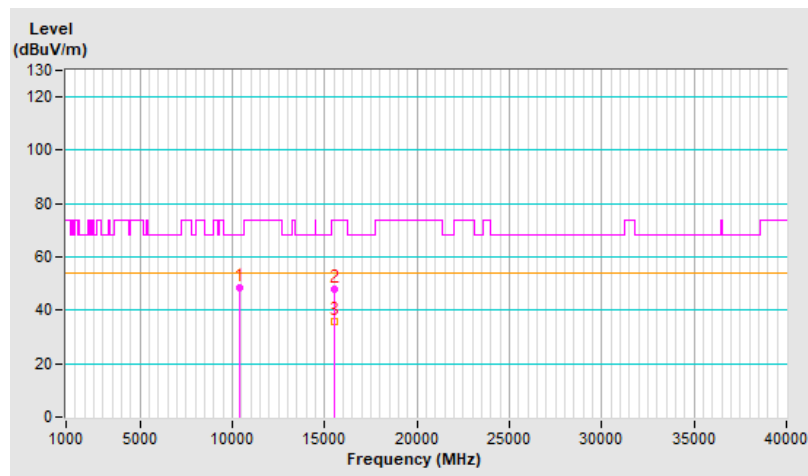


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	53.0 PK	68.2	-15.2	2.06 V	169	37.1	15.9
2	15540.00	49.1 PK	74.0	-24.9	1.51 V	53	32.6	16.5
3	15540.00	36.8 AV	54.0	-17.2	1.51 V	53	20.3	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

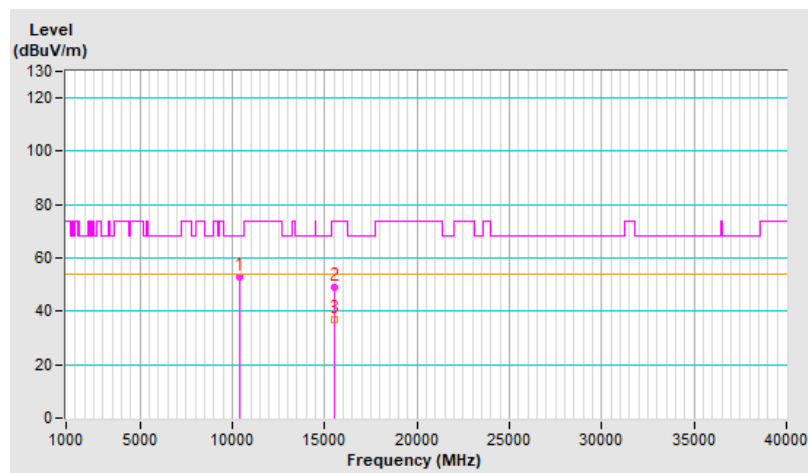


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.1 PK	68.2	-19.1	3.54 H	62	33.0	16.1
2	15600.00	48.2 PK	74.0	-25.8	1.42 H	177	31.6	16.6
3	15600.00	36.2 AV	54.0	-17.8	1.42 H	177	19.6	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

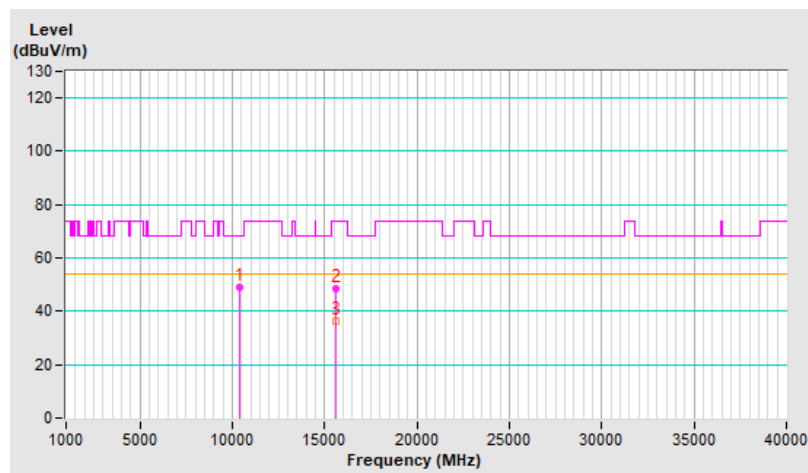


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	53.4 PK	68.2	-14.8	2.06 V	167	37.3	16.1
2	15600.00	49.1 PK	74.0	-24.9	1.52 V	54	32.5	16.6
3	15600.00	36.6 AV	54.0	-17.4	1.52 V	54	20.0	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

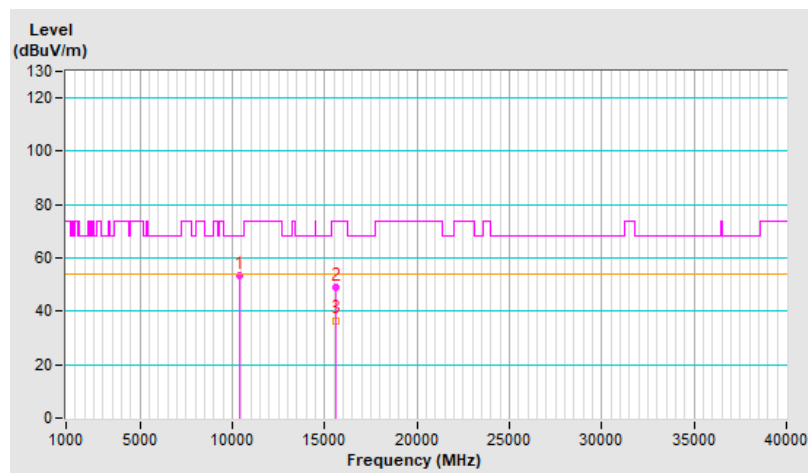




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.1 PK	68.2	-19.1	3.53 H	57	33.1	16.0
2	15720.00	48.4 PK	74.0	-25.6	1.46 H	171	31.6	16.8
3	15720.00	36.1 AV	54.0	-17.9	1.46 H	171	19.3	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

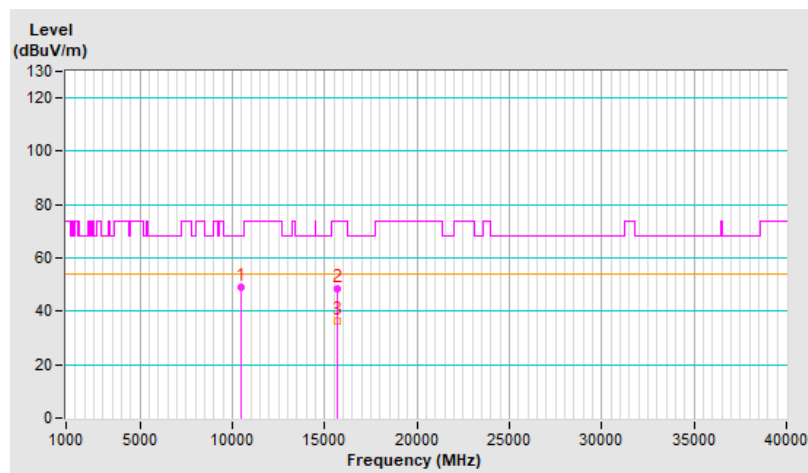


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	52.9 PK	68.2	-15.3	2.08 V	162	36.9	16.0
2	15720.00	48.9 PK	74.0	-25.1	1.46 V	43	32.1	16.8
3	15720.00	36.9 AV	54.0	-17.1	1.46 V	43	20.1	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

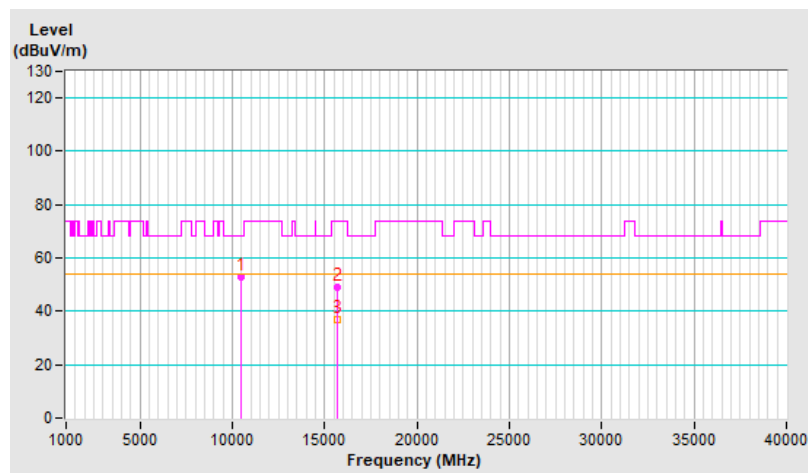


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.8 PK	68.2	-19.4	3.56 H	59	32.7	16.1
2	15780.00	48.2 PK	74.0	-25.8	1.41 H	164	31.4	16.8
3	15780.00	36.3 AV	54.0	-17.7	1.41 H	164	19.5	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

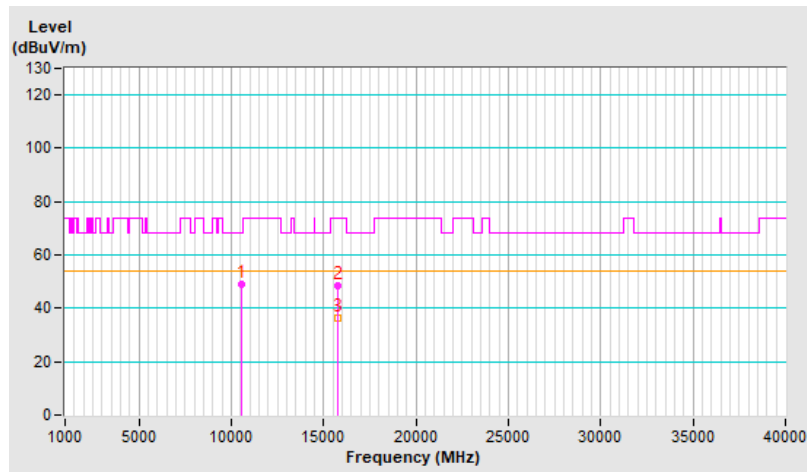


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	52.9 PK	68.2	-15.3	2.04 V	176	36.8	16.1
2	15780.00	48.1 PK	74.0	-25.9	1.58 V	38	31.3	16.8
3	15780.00	36.1 AV	54.0	-17.9	1.58 V	38	19.3	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

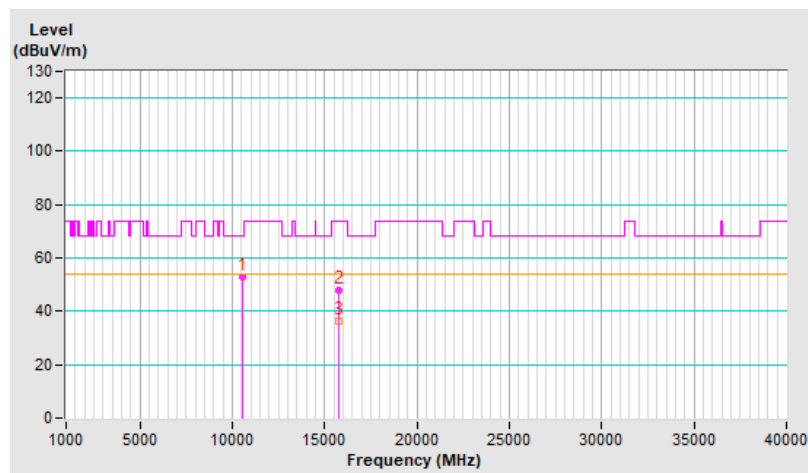


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.8 PK	74.0	-25.2	3.55 H	65	32.3	16.5
2	10600.00	37.5 AV	54.0	-16.5	3.55 H	65	21.0	16.5
3	15900.00	48.3 PK	74.0	-25.7	1.44 H	165	31.2	17.1
4	15900.00	36.2 AV	54.0	-17.8	1.44 H	165	19.1	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

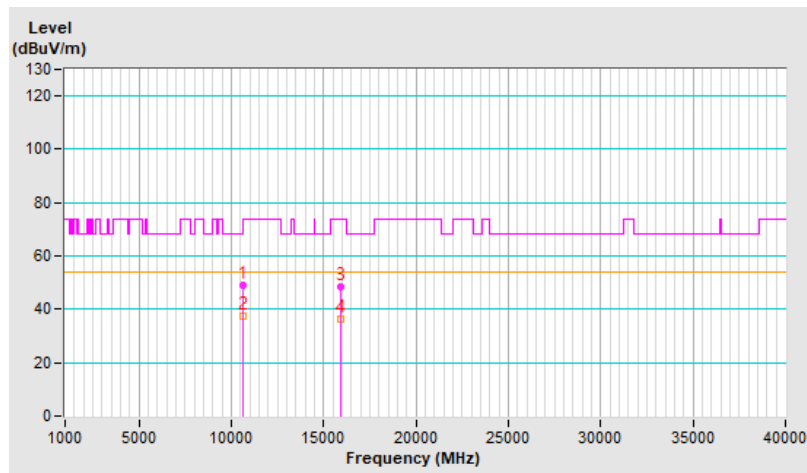


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	53.1 PK	74.0	-20.9	2.07 V	188	36.6	16.5
2	10600.00	41.5 AV	54.0	-12.5	2.07 V	188	25.0	16.5
3	15900.00	48.6 PK	74.0	-25.4	1.57 V	52	31.5	17.1
4	15900.00	36.4 AV	54.0	-17.6	1.57 V	52	19.3	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

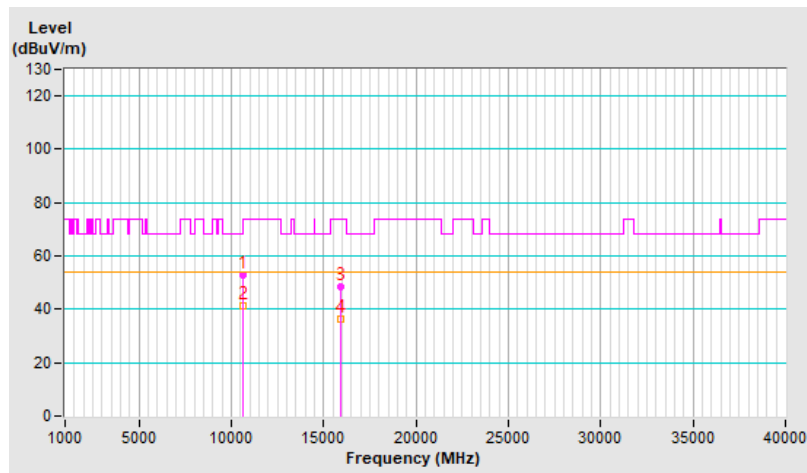


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.57 H	77	31.9	16.6
2	10640.00	37.0 AV	54.0	-17.0	3.57 H	77	20.4	16.6
3	15960.00	48.9 PK	74.0	-25.1	1.44 H	154	31.8	17.1
4	15960.00	36.7 AV	54.0	-17.3	1.44 H	154	19.6	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

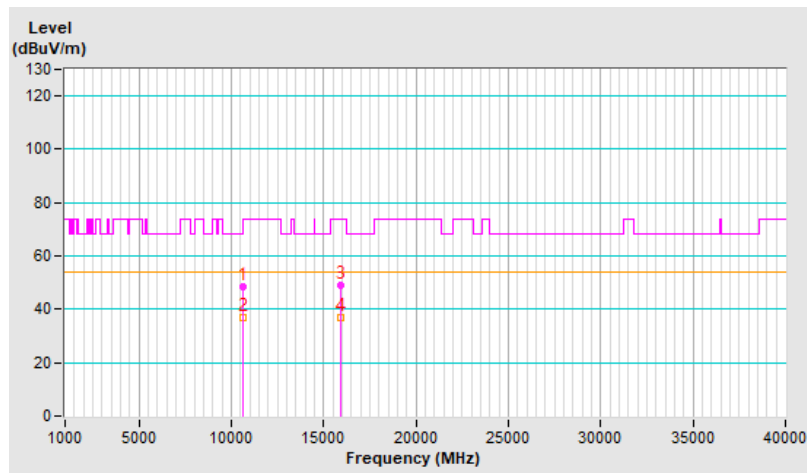


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	53.4 PK	74.0	-20.6	2.01 V	183	36.8	16.6
2	10640.00	41.7 AV	54.0	-12.3	2.01 V	183	25.1	16.6
3	15960.00	48.9 PK	74.0	-25.1	1.53 V	44	31.8	17.1
4	15960.00	36.9 AV	54.0	-17.1	1.53 V	44	19.8	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

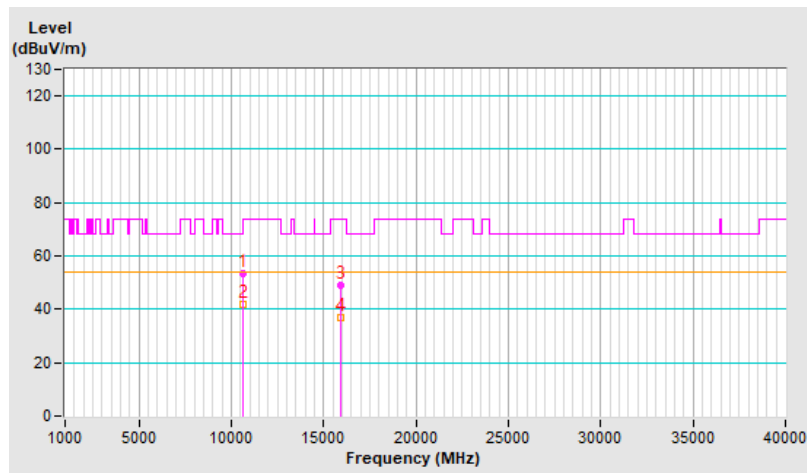




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.5 PK	74.0	-25.5	3.53 H	56	31.4	17.1
2	11000.00	37.1 AV	54.0	-16.9	3.53 H	56	20.0	17.1
3	#16500.00	48.2 PK	68.2	-20.0	1.42 H	158	28.7	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

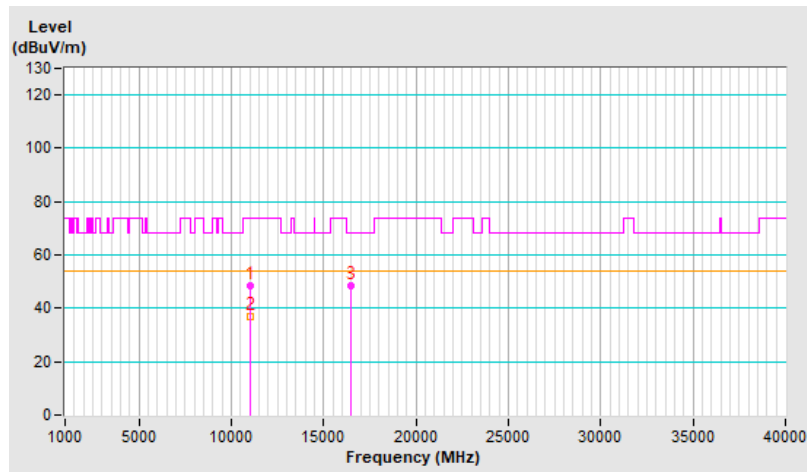




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	51.8 PK	74.0	-22.2	2.02 V	197	34.7	17.1
2	11000.00	40.3 AV	54.0	-13.7	2.02 V	197	23.2	17.1
3	#16500.00	48.9 PK	68.2	-19.3	1.52 V	41	29.4	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

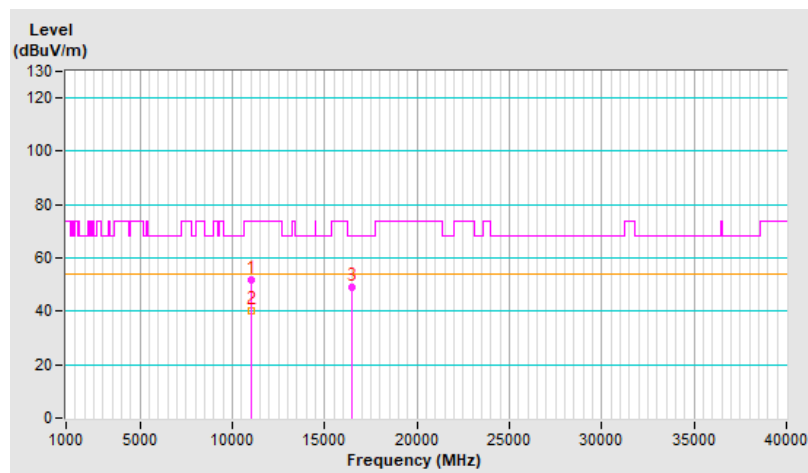


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	48.8 PK	74.0	-25.2	3.50 H	62	32.0	16.8
2	11160.00	37.2 AV	54.0	-16.8	3.50 H	62	20.4	16.8
3	#16740.00	48.4 PK	68.2	-19.8	1.41 H	180	27.0	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

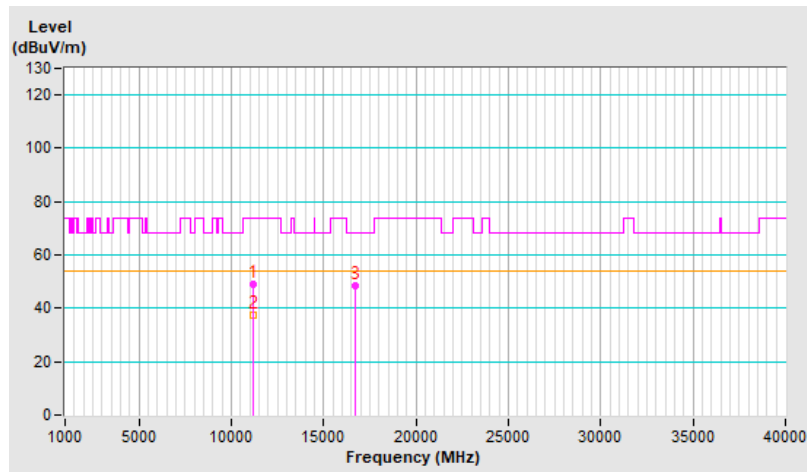


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	53.1 PK	74.0	-20.9	2.06 V	207	36.3	16.8
2	11160.00	41.3 AV	54.0	-12.7	2.06 V	207	24.5	16.8
3	#16740.00	49.1 PK	68.2	-19.1	1.55 V	48	27.7	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

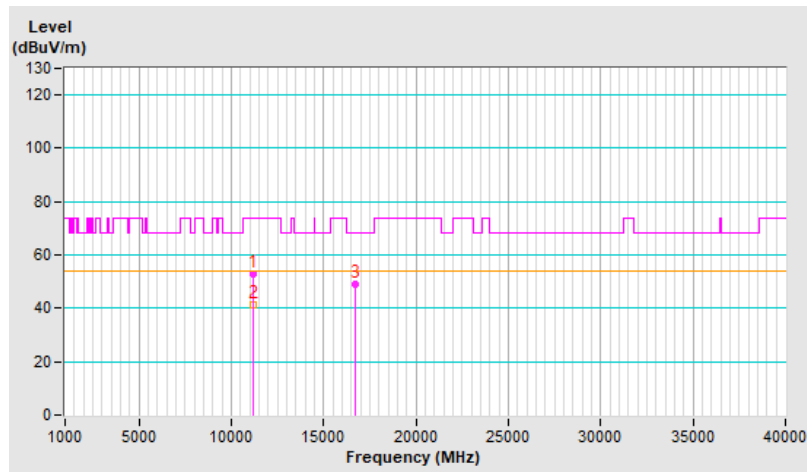


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.0 PK	74.0	-25.0	3.55 H	74	32.3	16.7
2	11400.00	37.9 AV	54.0	-16.1	3.55 H	74	21.2	16.7
3	#17100.00	48.9 PK	68.2	-19.3	1.38 H	172	28.5	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

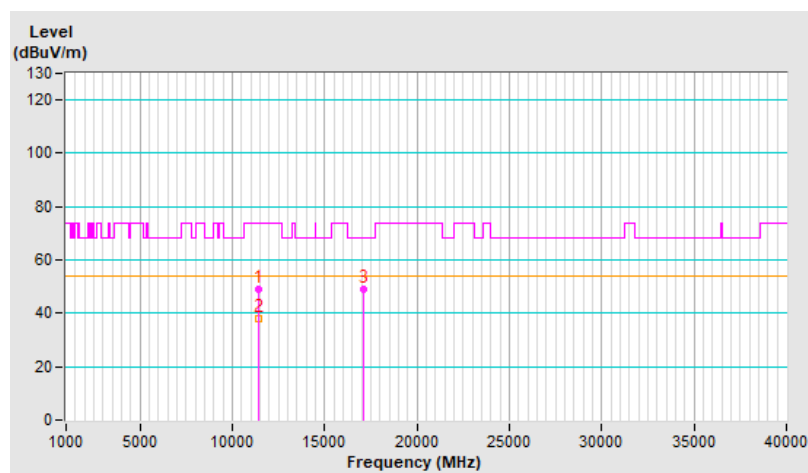


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	52.8 PK	74.0	-21.2	1.99 V	205	36.1	16.7
2	11400.00	40.9 AV	54.0	-13.1	1.99 V	205	24.2	16.7
3	#17100.00	49.0 PK	68.2	-19.2	1.48 V	42	28.6	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

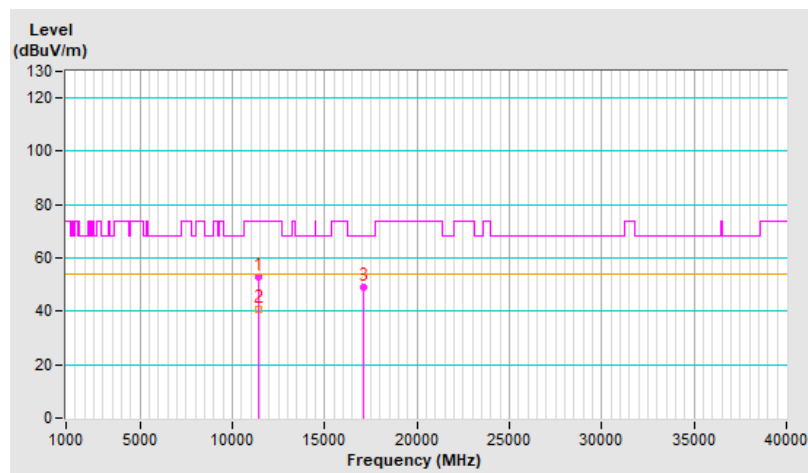


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.4 PK	74.0	-25.6	3.57 H	62	31.7	16.7
2	11440.00	37.3 AV	54.0	-16.7	3.57 H	62	20.6	16.7
3	#17160.00	51.3 PK	68.2	-16.9	1.47 H	150	31.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

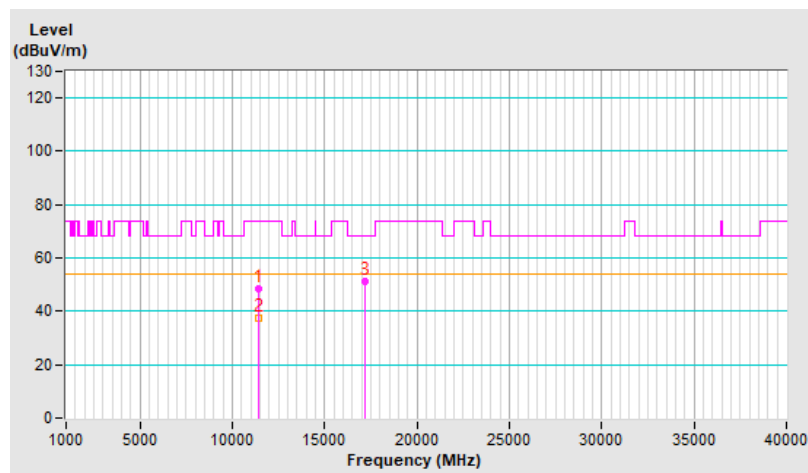


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.5 PK	74.0	-21.5	1.95 V	216	35.8	16.7
2	11440.00	40.8 AV	54.0	-13.2	1.95 V	216	24.1	16.7
3	#17160.00	51.6 PK	68.2	-16.6	1.44 V	53	31.3	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

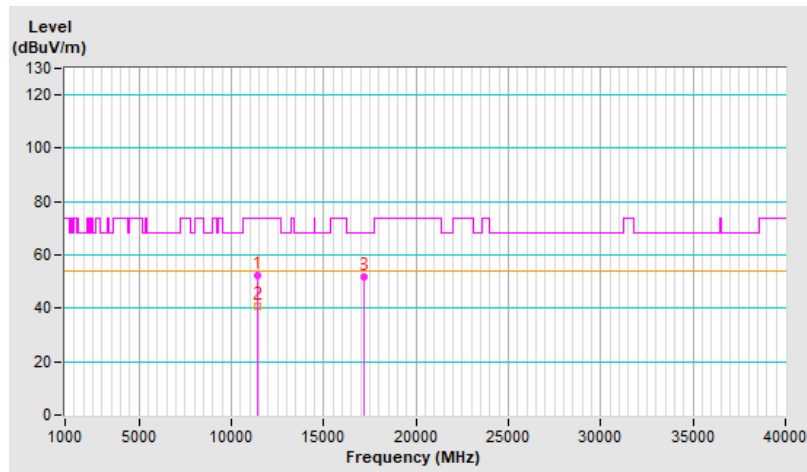




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	49.2 PK	74.0	-24.8	3.53 H	46	32.4	16.8
2	11490.00	38.4 AV	54.0	-15.6	3.53 H	46	21.6	16.8
3	#17235.00	51.2 PK	68.2	-17.0	1.51 H	170	30.9	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

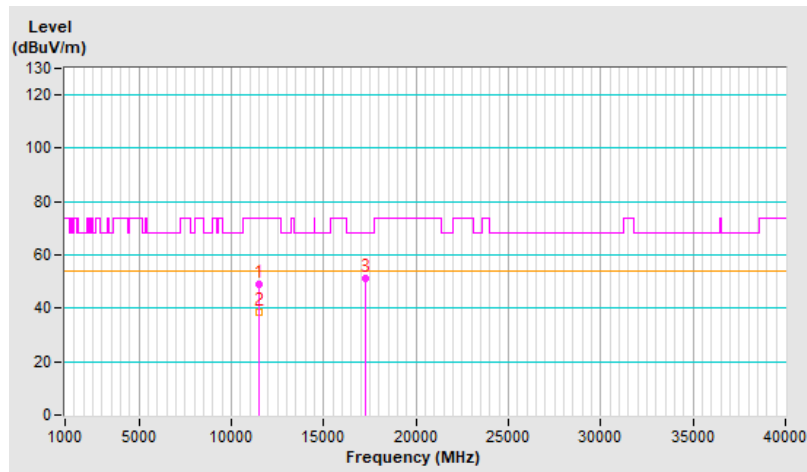


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.2 PK	74.0	-21.8	2.17 V	194	35.4	16.8
2	11490.00	42.8 AV	54.0	-11.2	2.17 V	194	26.0	16.8
3	#17235.00	51.9 PK	68.2	-16.3	1.49 V	38	31.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

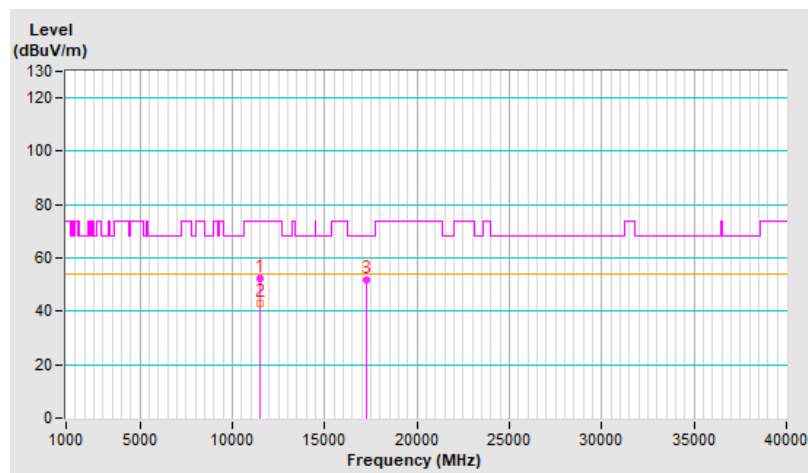


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.3 PK	74.0	-24.7	3.55 H	28	32.5	16.8
2	11570.00	38.4 AV	54.0	-15.6	3.55 H	28	21.6	16.8
3	#17355.00	50.8 PK	68.2	-17.4	1.48 H	168	29.6	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

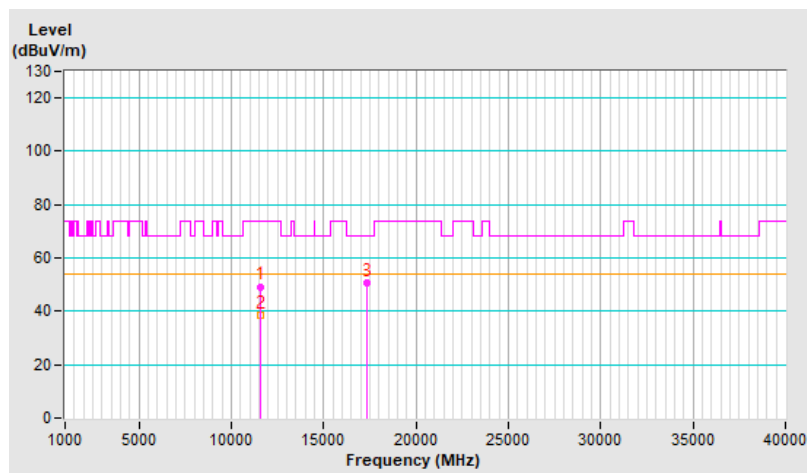


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.9 PK	74.0	-21.1	2.11 V	192	36.1	16.8
2	11570.00	43.5 AV	54.0	-10.5	2.11 V	192	26.7	16.8
3	#17355.00	52.0 PK	68.2	-16.2	1.49 V	27	30.8	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

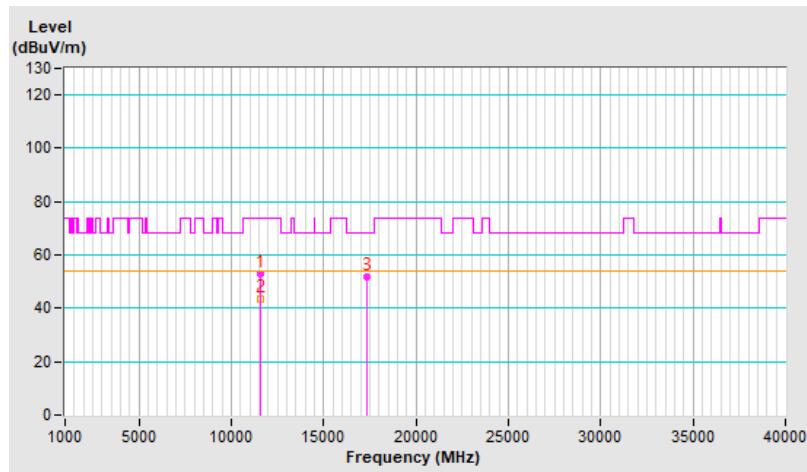


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	48.9 PK	74.0	-25.1	3.60 H	45	32.2	16.7
2	11650.00	38.2 AV	54.0	-15.8	3.60 H	45	21.5	16.7
3	#17475.00	51.5 PK	68.2	-16.7	1.49 H	146	29.2	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

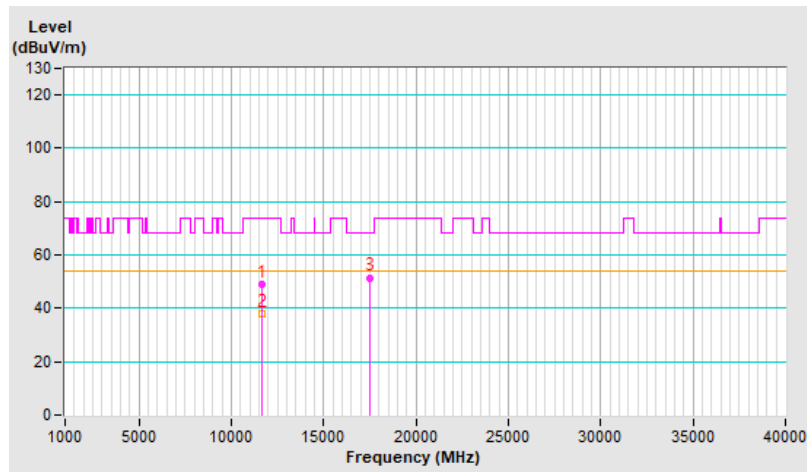


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.6 PK	74.0	-21.4	2.19 V	179	35.9	16.7
2	11650.00	43.2 AV	54.0	-10.8	2.19 V	179	26.5	16.7
3	#17475.00	52.1 PK	68.2	-16.1	1.52 V	32	29.8	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

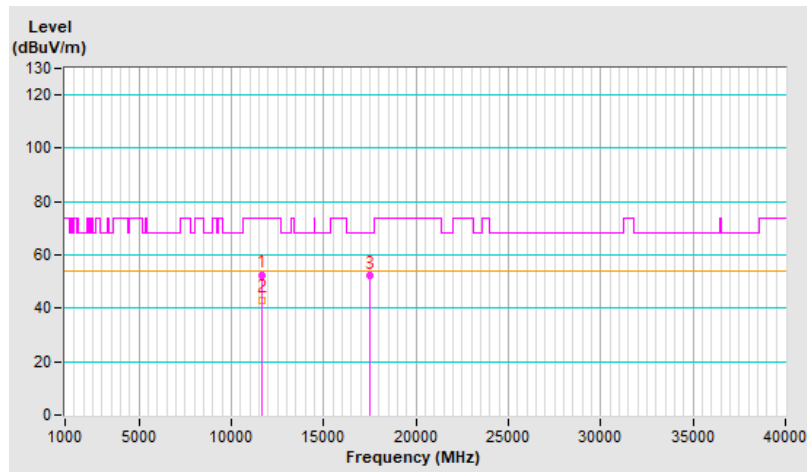


### For 1S1T

<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.2 PK	68.2	-20.0	3.44 H	59	32.3	15.9
2	15540.00	48.2 PK	74.0	-25.8	1.37 H	194	31.7	16.5
3	15540.00	36.1 AV	54.0	-17.9	1.37 H	194	19.6	16.5

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

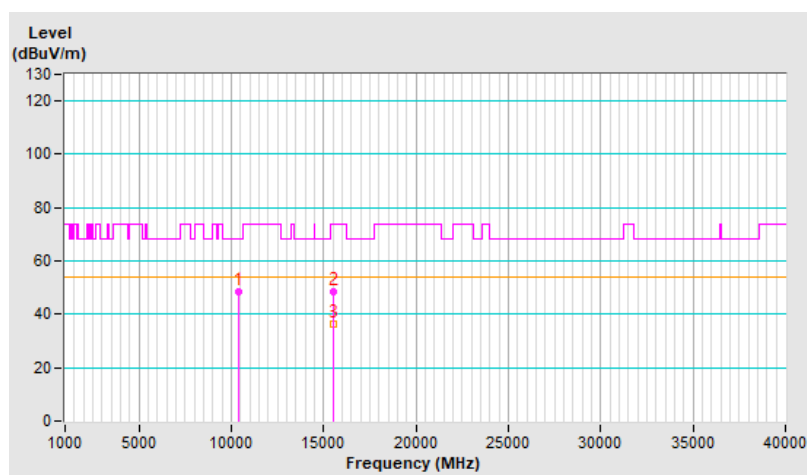


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.2 PK	68.2	-20.0	2.01 V	211	32.3	15.9
2	15540.00	48.1 PK	74.0	-25.9	1.40 V	28	31.6	16.5
3	15540.00	35.9 AV	54.0	-18.1	1.40 V	28	19.4	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

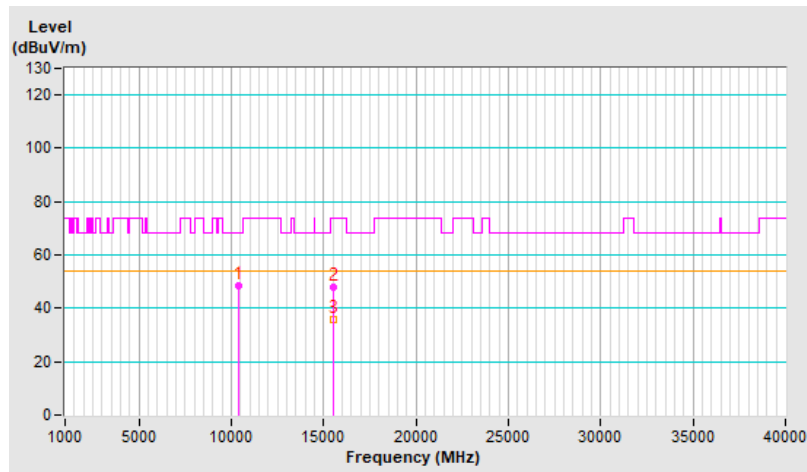




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.4 PK	68.2	-18.8	3.48 H	63	33.3	16.1
2	15600.00	47.7 PK	74.0	-26.3	1.38 H	152	31.1	16.6
3	15600.00	35.4 AV	54.0	-18.6	1.38 H	152	18.8	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

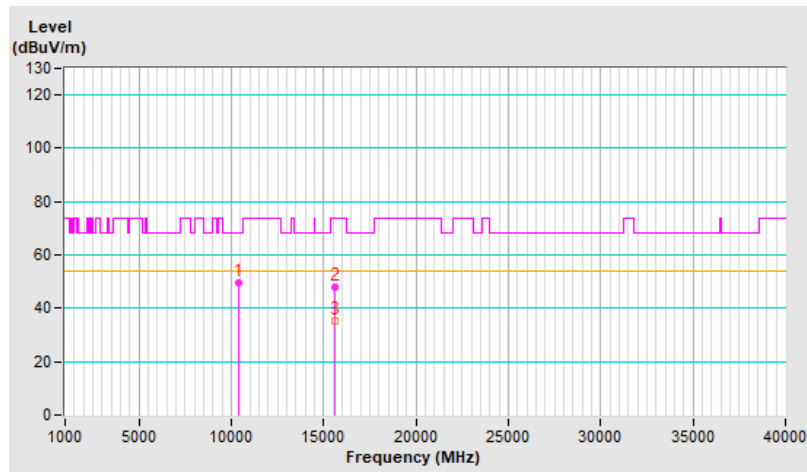


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.9 PK	68.2	-18.3	1.97 V	222	33.8	16.1
2	15600.00	47.8 PK	74.0	-26.2	1.35 V	40	31.2	16.6
3	15600.00	35.7 AV	54.0	-18.3	1.35 V	40	19.1	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

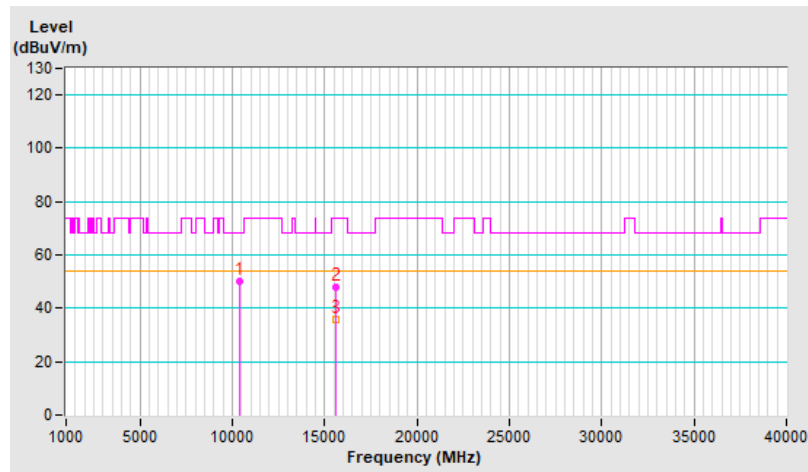


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.9 PK	68.2	-19.3	3.52 H	62	32.9	16.0
2	15720.00	48.0 PK	74.0	-26.0	1.42 H	190	31.2	16.8
3	15720.00	35.7 AV	54.0	-18.3	1.42 H	190	18.9	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

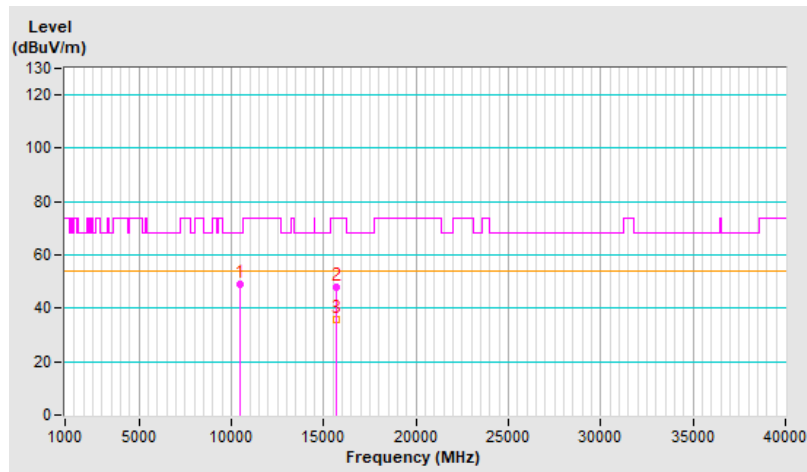


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.3 PK	68.2	-18.9	2.06 V	177	33.3	16.0
2	15720.00	48.0 PK	74.0	-26.0	1.55 V	19	31.2	16.8
3	15720.00	36.0 AV	54.0	-18.0	1.55 V	19	19.2	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

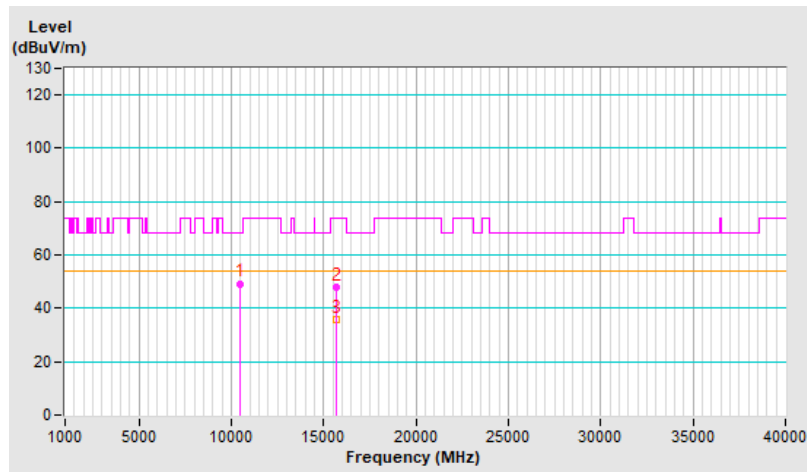


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.6 PK	68.2	-19.6	3.56 H	81	32.5	16.1
2	15780.00	48.2 PK	74.0	-25.8	1.37 H	168	31.4	16.8
3	15780.00	35.8 AV	54.0	-18.2	1.37 H	168	19.0	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

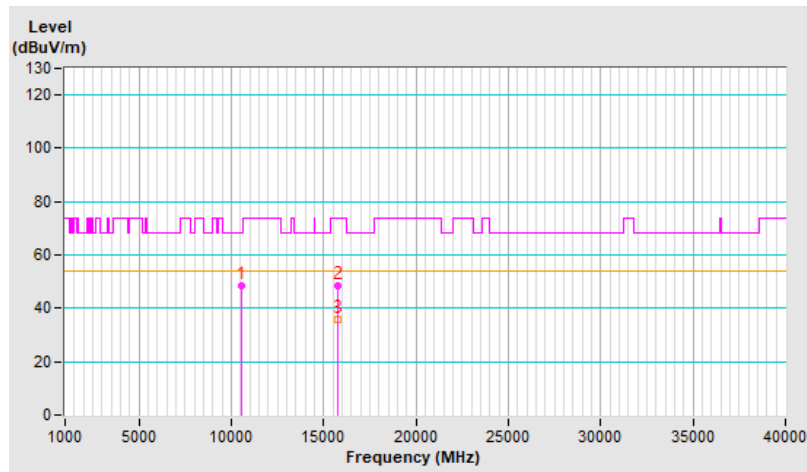


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	52.2 PK	68.2	-16.0	2.04 V	175	36.1	16.1
2	15780.00	47.7 PK	74.0	-26.3	1.53 V	35	30.9	16.8
3	15780.00	35.9 AV	54.0	-18.1	1.53 V	35	19.1	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

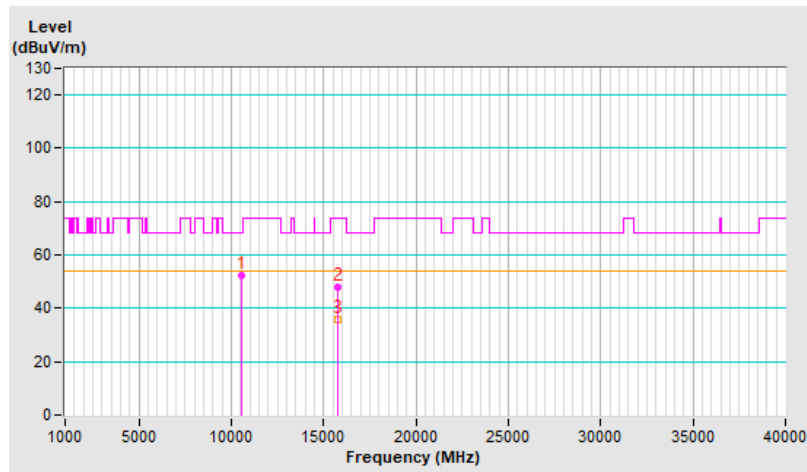


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.5 PK	74.0	-25.5	3.52 H	94	32.0	16.5
2	10600.00	37.0 AV	54.0	-17.0	3.52 H	94	20.5	16.5
3	15900.00	48.4 PK	74.0	-25.6	1.39 H	155	31.3	17.1
4	15900.00	36.2 AV	54.0	-17.8	1.39 H	155	19.1	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

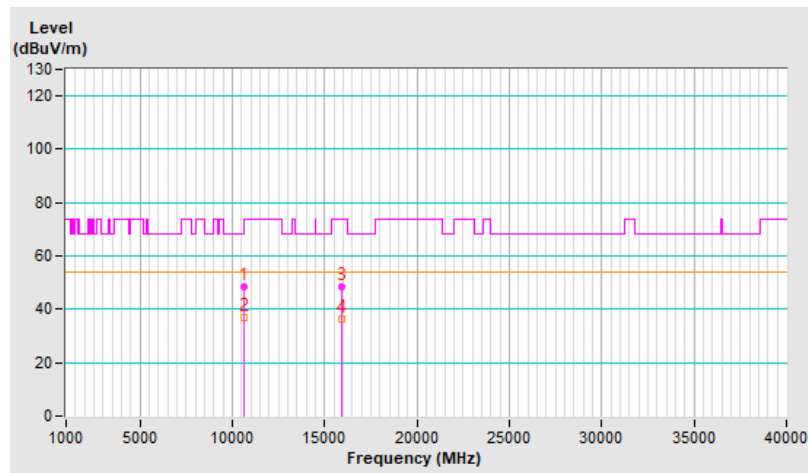


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.5 PK	74.0	-25.5	2.01 V	169	32.0	16.5
2	10600.00	36.8 AV	54.0	-17.2	2.01 V	169	20.3	16.5
3	15900.00	48.5 PK	74.0	-25.5	1.59 V	33	31.4	17.1
4	15900.00	36.5 AV	54.0	-17.5	1.59 V	33	19.4	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

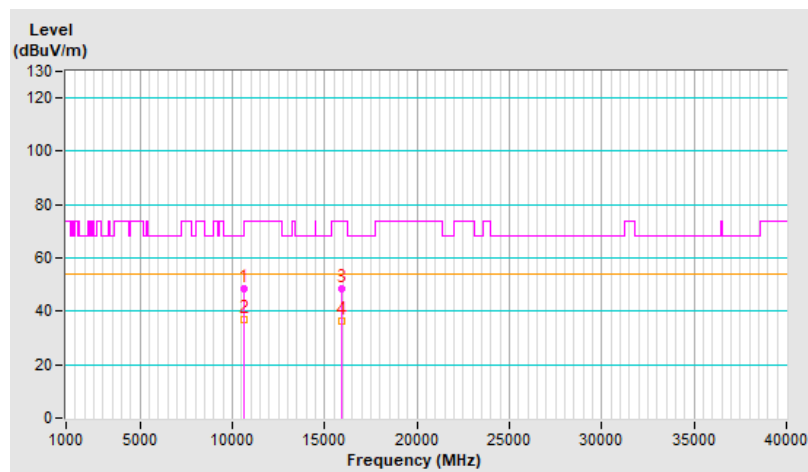




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.8 PK	74.0	-25.2	3.62 H	92	32.2	16.6
2	10640.00	37.6 AV	54.0	-16.4	3.62 H	92	21.0	16.6
3	15960.00	47.6 PK	74.0	-26.4	1.31 H	179	30.5	17.1
4	15960.00	35.4 AV	54.0	-18.6	1.31 H	179	18.3	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

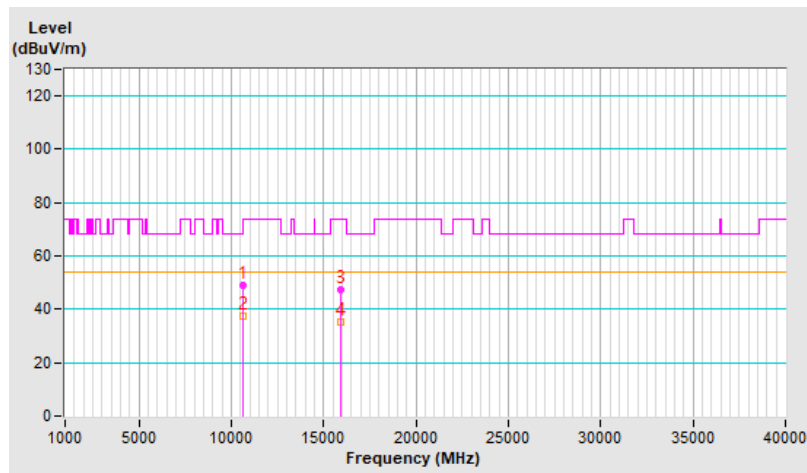


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	52.7 PK	74.0	-21.3	1.86 V	221	36.1	16.6
2	10640.00	40.5 AV	54.0	-13.5	1.86 V	221	23.9	16.6
3	15960.00	49.9 PK	74.0	-24.1	1.43 V	72	32.8	17.1
4	15960.00	36.9 AV	54.0	-17.1	1.43 V	72	19.8	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

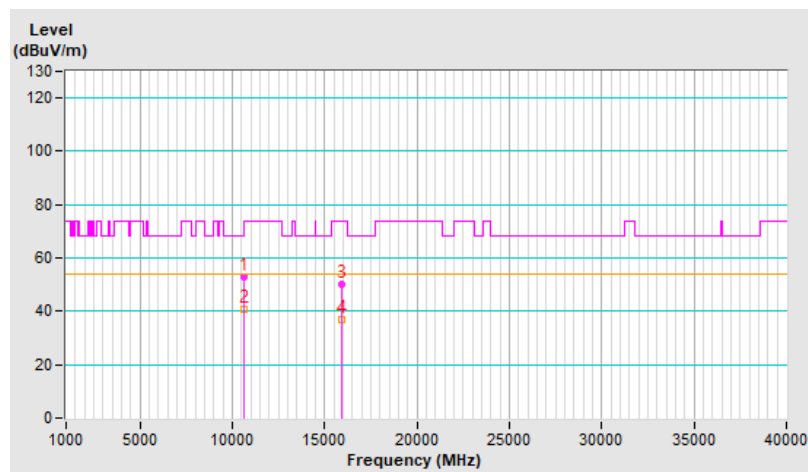


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	53.5 PK	74.0	-20.5	3.44 H	78	36.4	17.1
2	11000.00	40.9 AV	54.0	-13.1	3.44 H	78	23.8	17.1
3	#16500.00	49.1 PK	68.2	-19.1	1.43 H	184	29.6	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

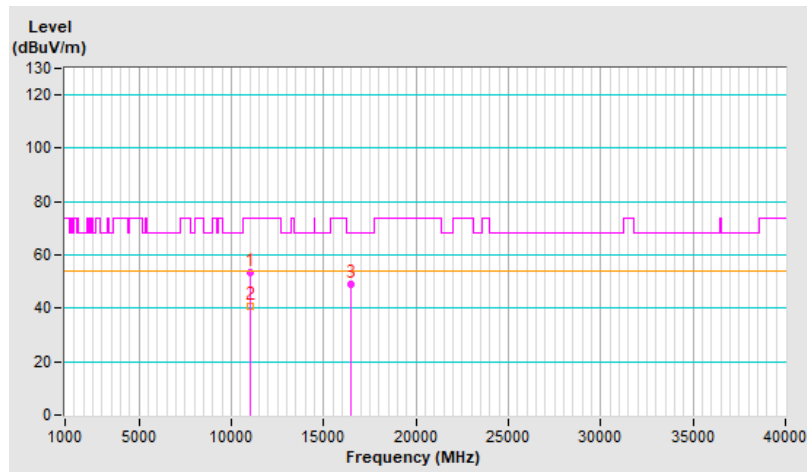


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	53.3 PK	74.0	-20.7	1.81 V	198	36.2	17.1
2	11000.00	40.9 AV	54.0	-13.1	1.81 V	198	23.8	17.1
3	#16500.00	49.5 PK	68.2	-18.7	1.52 V	48	30.0	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

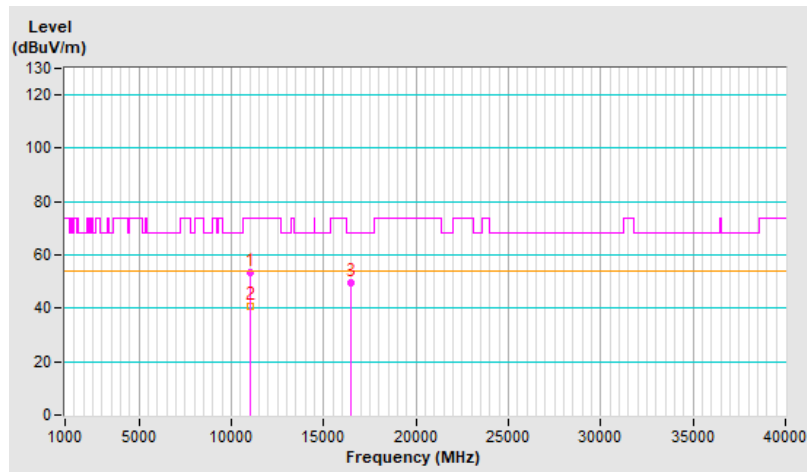


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	53.0 PK	74.0	-21.0	3.59 H	36	36.2	16.8
2	11160.00	40.7 AV	54.0	-13.3	3.59 H	36	23.9	16.8
3	#16740.00	49.8 PK	68.2	-18.4	1.48 H	189	28.4	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

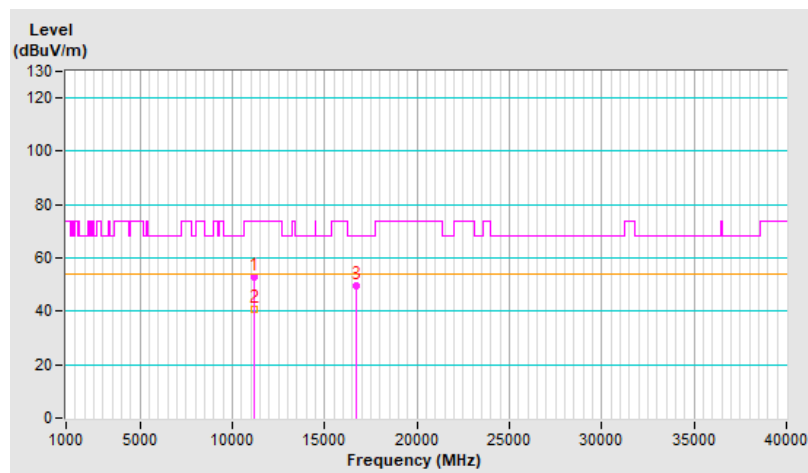


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	52.2 PK	74.0	-21.8	2.01 V	176	35.4	16.8
2	11160.00	41.0 AV	54.0	-13.0	2.01 V	176	24.2	16.8
3	#16740.00	48.1 PK	68.2	-20.1	1.59 V	48	26.7	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

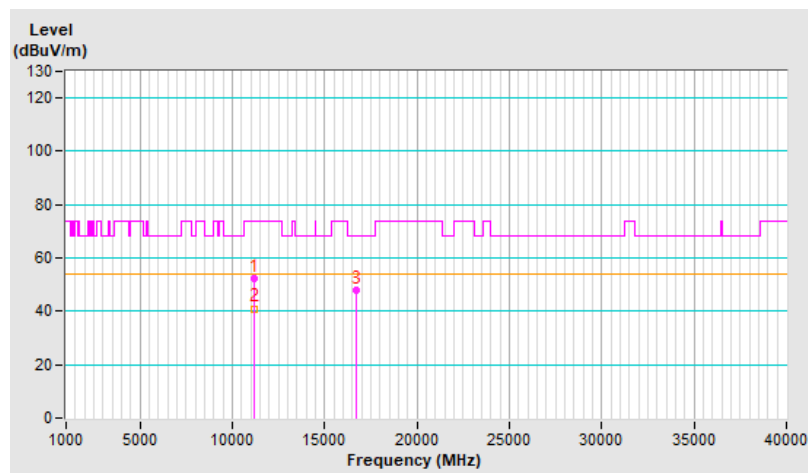


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	53.5 PK	74.0	-20.5	3.55 H	82	36.8	16.7
2	11400.00	41.2 AV	54.0	-12.8	3.55 H	82	24.5	16.7
3	#17100.00	49.3 PK	68.2	-18.9	1.36 H	183	28.9	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

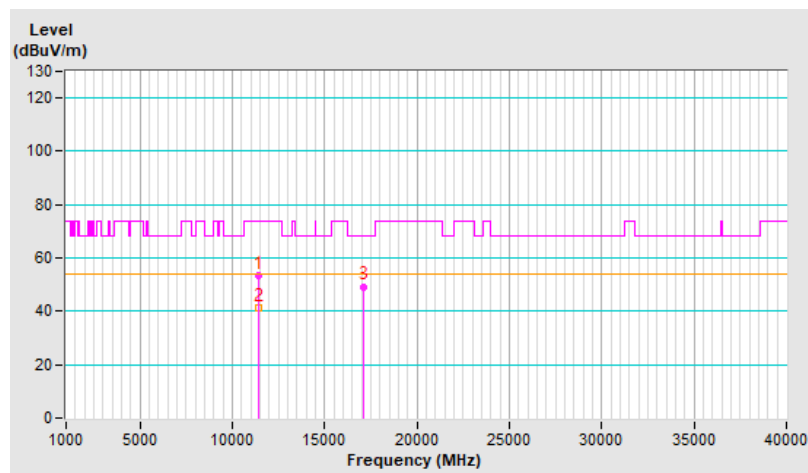


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	52.0 PK	74.0	-22.0	1.92 V	197	35.3	16.7
2	11400.00	40.9 AV	54.0	-13.1	1.92 V	197	24.2	16.7
3	#17100.00	48.0 PK	68.2	-20.2	1.51 V	22	27.6	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

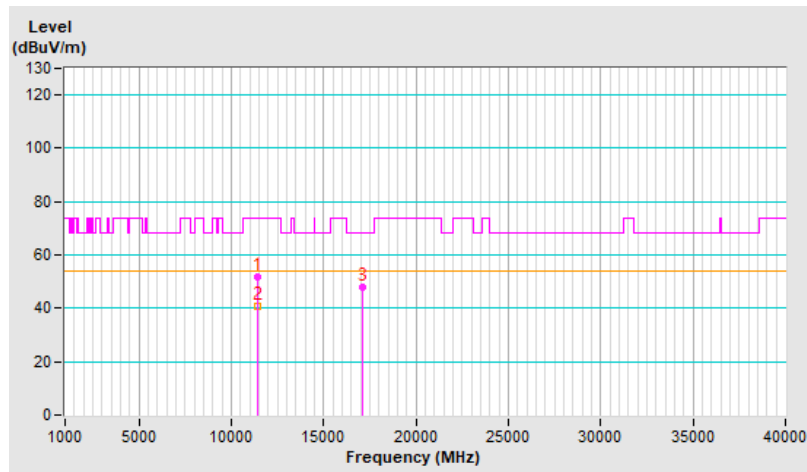




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	53.1 PK	74.0	-20.9	3.49 H	83	36.4	16.7
2	11440.00	40.9 AV	54.0	-13.1	3.49 H	83	24.2	16.7
3	#17160.00	49.4 PK	68.2	-18.8	1.36 H	186	29.1	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

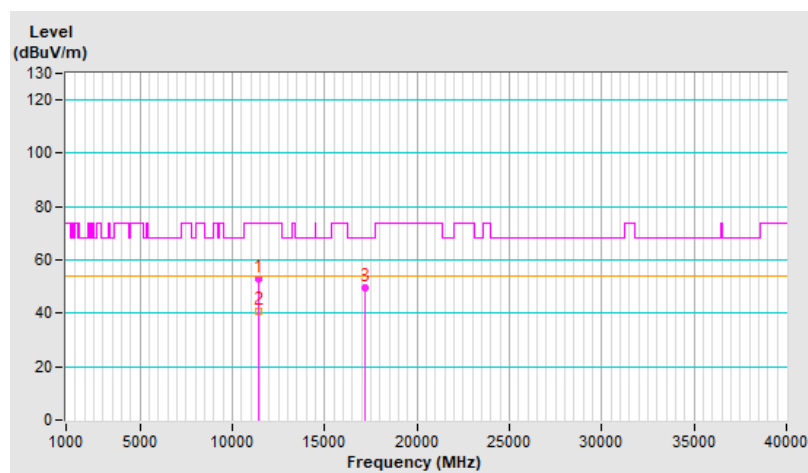


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.5 PK	74.0	-22.5	1.94 V	193	34.8	16.7
2	11440.00	40.7 AV	54.0	-13.3	1.94 V	193	24.0	16.7
3	#17160.00	48.9 PK	68.2	-19.3	1.52 V	14	28.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

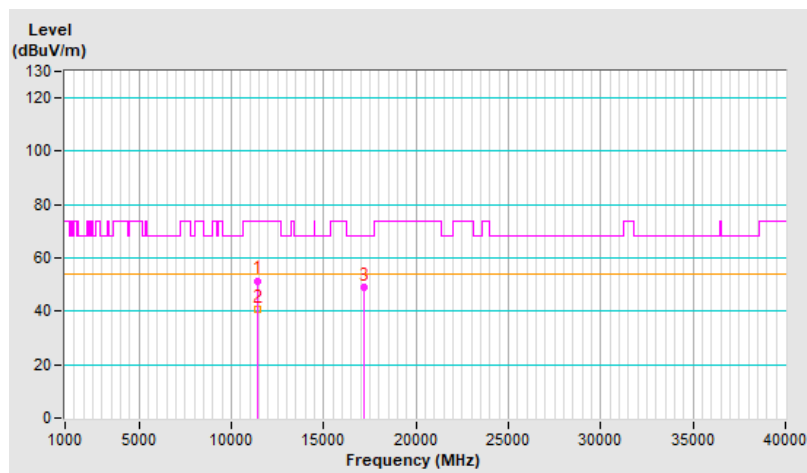


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	51.7 PK	74.0	-22.3	3.57 H	46	34.9	16.8
2	11490.00	42.6 AV	54.0	-11.4	3.57 H	46	25.8	16.8
3	#17235.00	52.1 PK	68.2	-16.1	1.38 H	153	31.8	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

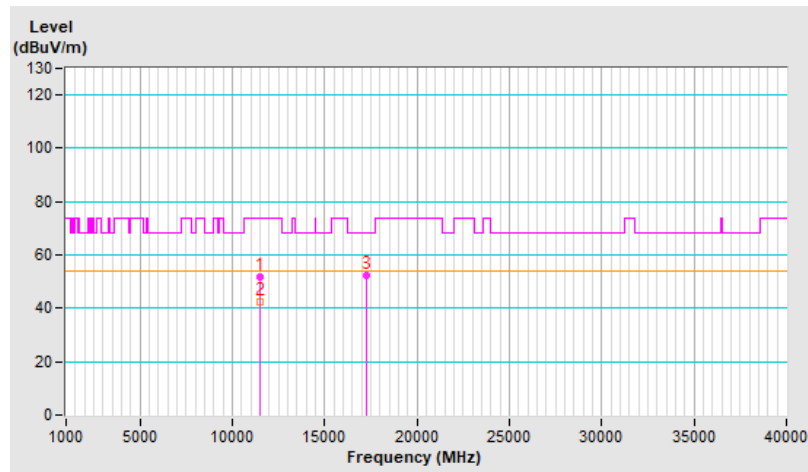


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.0 PK	74.0	-22.0	2.07 V	170	35.2	16.8
2	11490.00	42.8 AV	54.0	-11.2	2.07 V	170	26.0	16.8
3	#17235.00	52.5 PK	68.2	-15.7	1.54 V	25	32.2	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

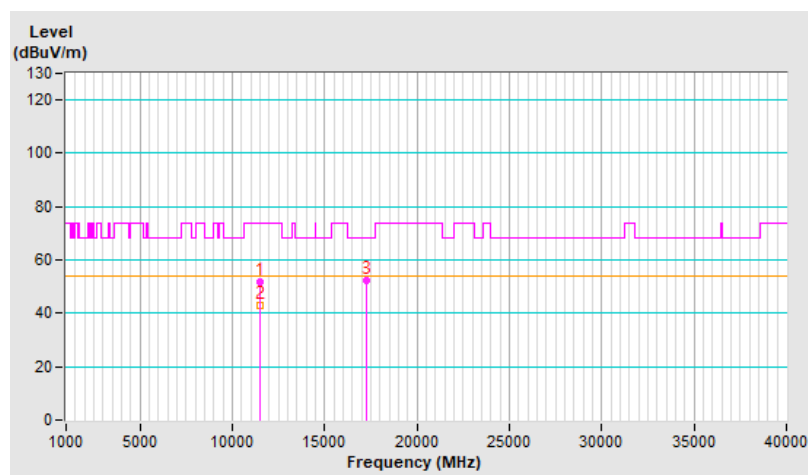


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.3 PK	74.0	-21.7	3.53 H	53	35.5	16.8
2	11570.00	42.9 AV	54.0	-11.1	3.53 H	53	26.1	16.8
3	#17355.00	53.0 PK	68.2	-15.2	1.41 H	147	31.8	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

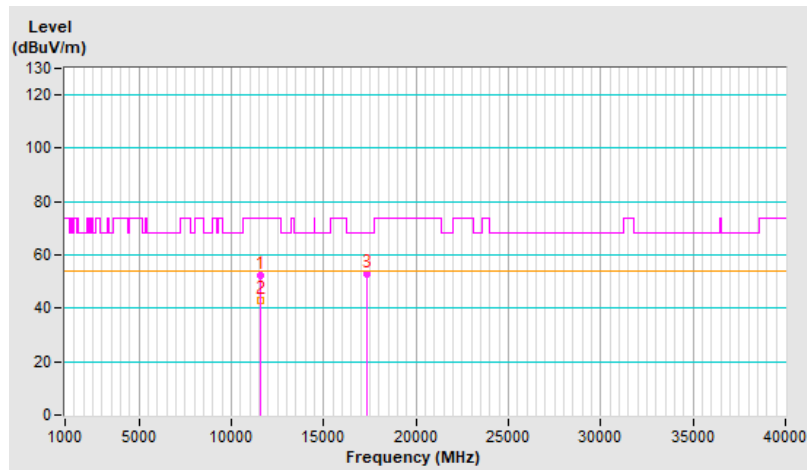


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.3 PK	74.0	-21.7	2.25 V	188	35.5	16.8
2	11570.00	43.0 AV	54.0	-11.0	2.25 V	188	26.2	16.8
3	#17355.00	51.7 PK	68.2	-16.5	1.57 V	13	30.5	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

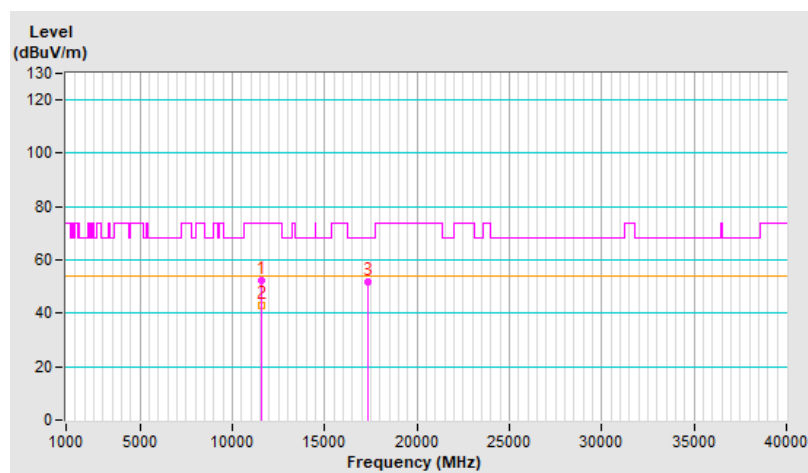


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.3 PK	74.0	-21.7	3.56 H	60	35.6	16.7
2	11650.00	43.0 AV	54.0	-11.0	3.56 H	60	26.3	16.7
3	#17475.00	53.0 PK	68.2	-15.2	1.34 H	155	30.7	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

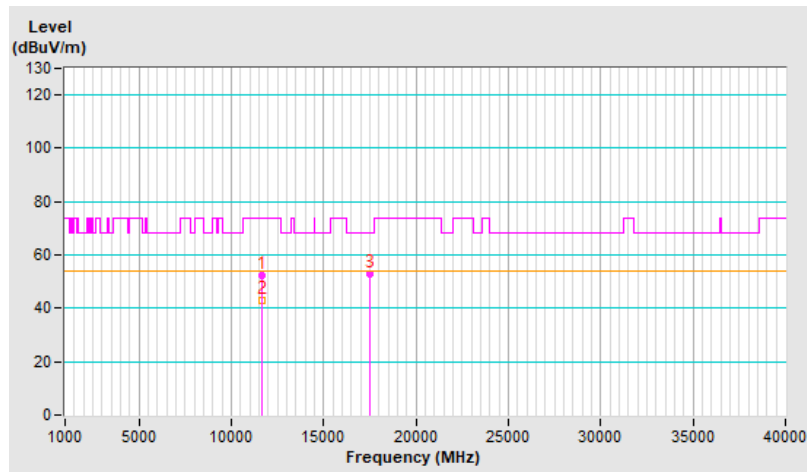


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.2 PK	74.0	-21.8	2.24 V	186	35.5	16.7
2	11650.00	42.9 AV	54.0	-11.1	2.24 V	186	26.2	16.7
3	#17475.00	51.8 PK	68.2	-16.4	1.57 V	7	29.5	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

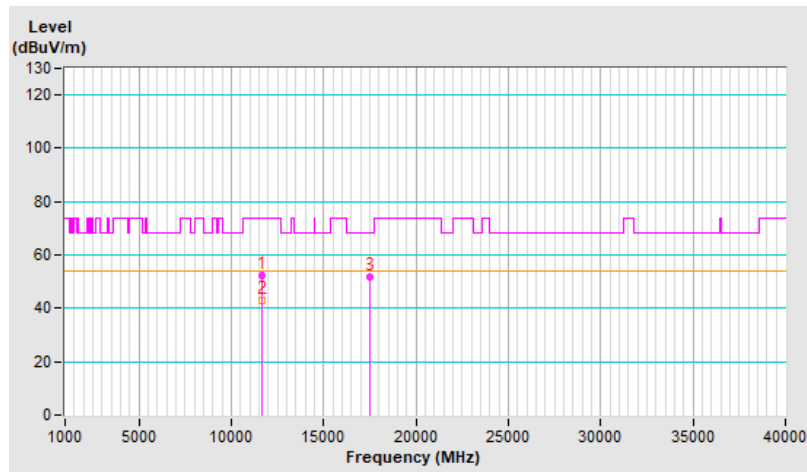




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	50.4 PK	68.2	-17.8	3.36 H	53	34.4	16.0
2	15570.00	48.2 PK	74.0	-25.8	1.51 H	201	31.7	16.5
3	15570.00	35.8 AV	54.0	-18.2	1.51 H	201	19.3	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

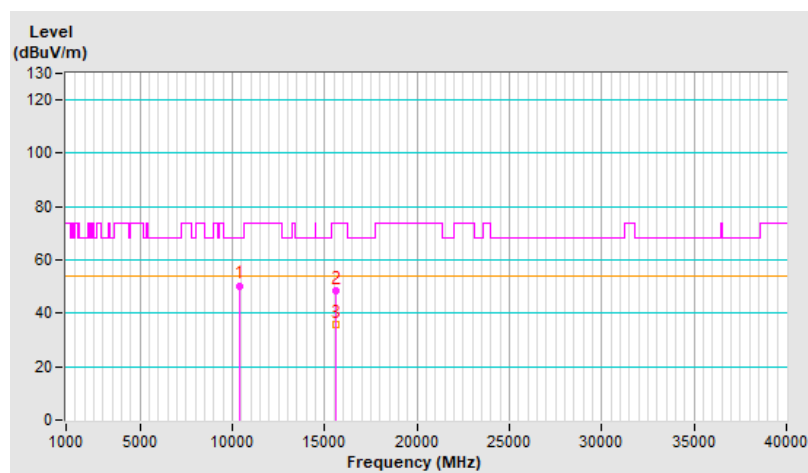


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	48.4 PK	68.2	-19.8	1.83 V	201	32.4	16.0
2	15570.00	48.7 PK	74.0	-25.3	1.52 V	28	32.2	16.5
3	15570.00	36.4 AV	54.0	-17.6	1.52 V	28	19.9	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

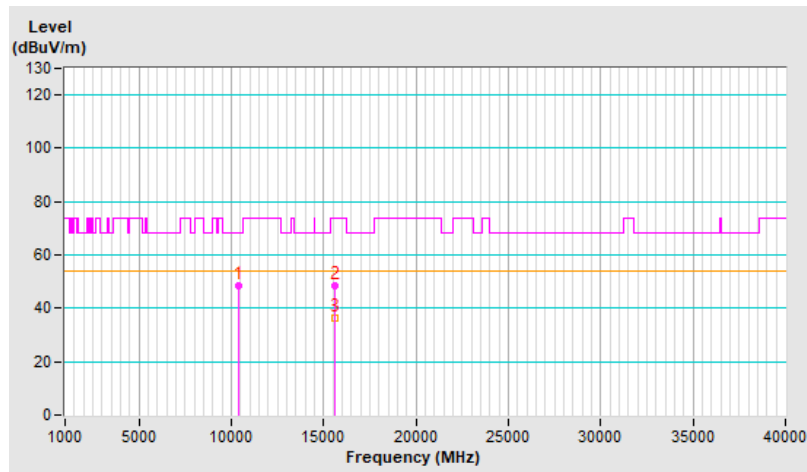


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	49.2 PK	68.2	-19.0	3.66 H	82	33.2	16.0
2	15690.00	48.1 PK	74.0	-25.9	1.44 H	208	31.4	16.7
3	15690.00	36.2 AV	54.0	-17.8	1.44 H	208	19.5	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

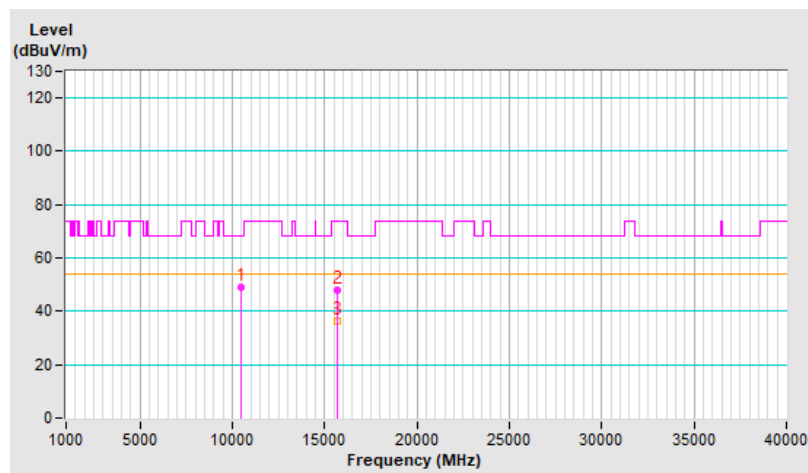


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	50.5 PK	68.2	-17.7	1.86 V	216	34.5	16.0
2	15690.00	48.3 PK	74.0	-25.7	1.45 V	40	31.6	16.7
3	15690.00	36.1 AV	54.0	-17.9	1.45 V	40	19.4	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

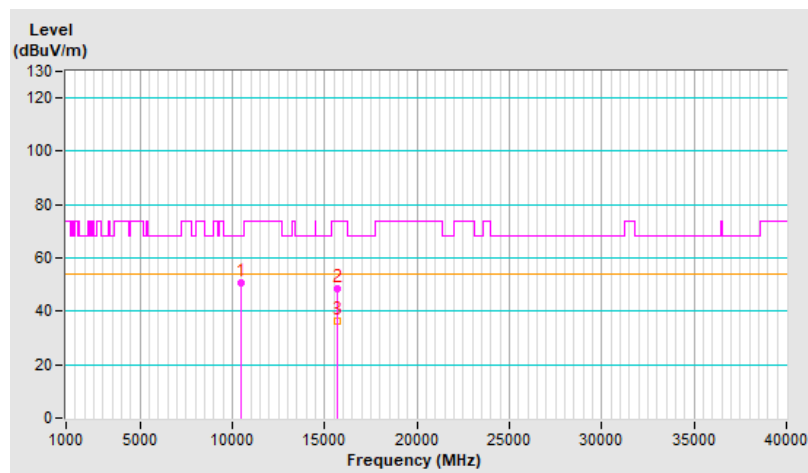


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.1 PK	68.2	-19.1	3.55 H	42	32.9	16.2
2	15810.00	48.0 PK	74.0	-26.0	1.43 H	192	31.2	16.8
3	15810.00	35.5 AV	54.0	-18.5	1.43 H	192	18.7	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

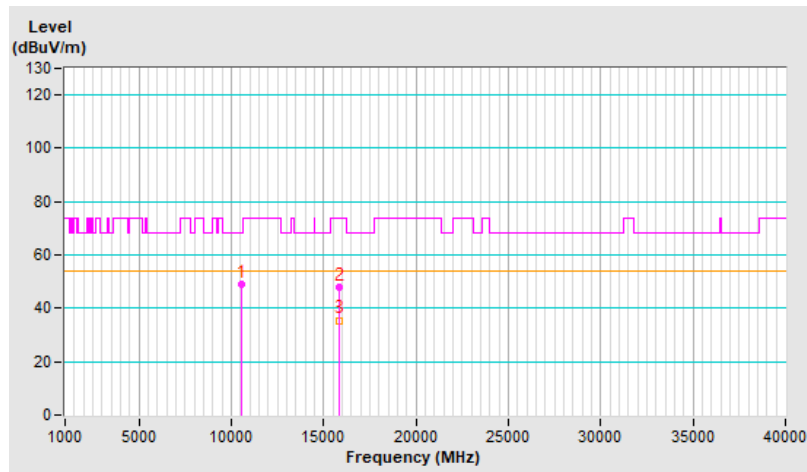


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	50.3 PK	68.2	-17.9	1.97 V	220	34.1	16.2
2	15810.00	48.0 PK	74.0	-26.0	1.45 V	53	31.2	16.8
3	15810.00	36.1 AV	54.0	-17.9	1.45 V	53	19.3	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

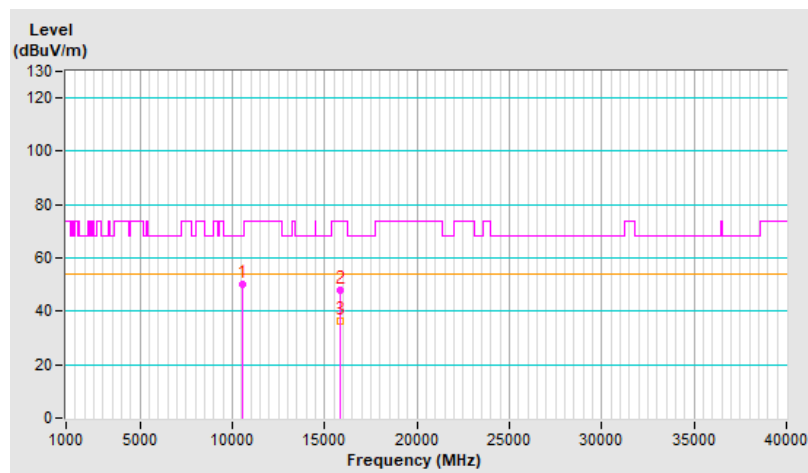


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	48.5 PK	74.0	-25.5	3.56 H	73	31.9	16.6
2	10620.00	36.6 AV	54.0	-17.4	3.56 H	73	20.0	16.6
3	15930.00	48.1 PK	74.0	-25.9	1.39 H	171	31.0	17.1
4	15930.00	36.1 AV	54.0	-17.9	1.39 H	171	19.0	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

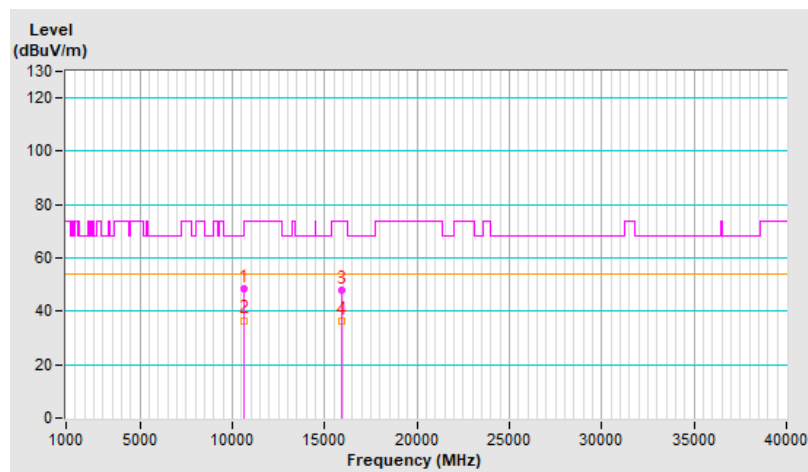




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	50.4 PK	74.0	-23.6	1.84 V	221	33.8	16.6
2	10620.00	38.6 AV	54.0	-15.4	1.84 V	221	22.0	16.6
3	15930.00	49.2 PK	74.0	-24.8	1.46 V	50	32.1	17.1
4	15930.00	36.8 AV	54.0	-17.2	1.46 V	50	19.7	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

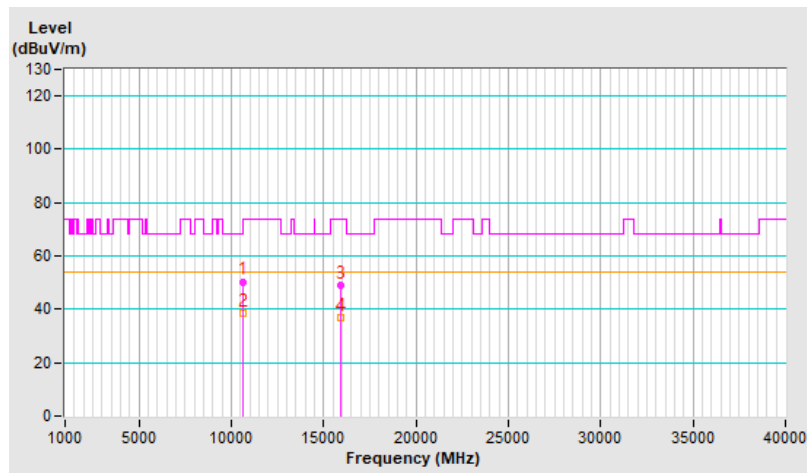




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.4 PK	74.0	-24.6	3.54 H	53	32.3	17.1
2	11020.00	37.7 AV	54.0	-16.3	3.54 H	53	20.6	17.1
3	#16530.00	48.1 PK	68.2	-20.1	1.48 H	157	28.2	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

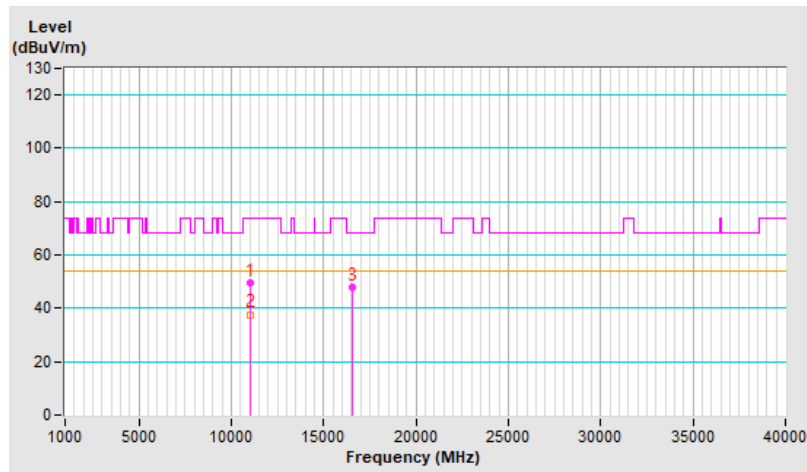


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	50.2 PK	74.0	-23.8	1.92 V	218	33.1	17.1
2	11020.00	38.3 AV	54.0	-15.7	1.92 V	218	21.2	17.1
3	#16530.00	48.5 PK	68.2	-19.7	1.49 V	39	28.6	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

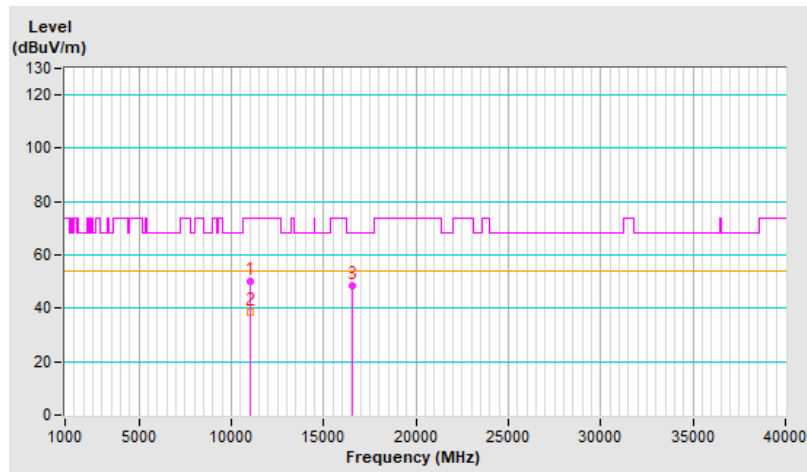


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	48.9 PK	74.0	-25.1	3.58 H	56	31.7	17.2
2	11100.00	37.4 AV	54.0	-16.6	3.58 H	56	20.2	17.2
3	#16650.00	48.5 PK	68.2	-19.7	1.53 H	178	27.3	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

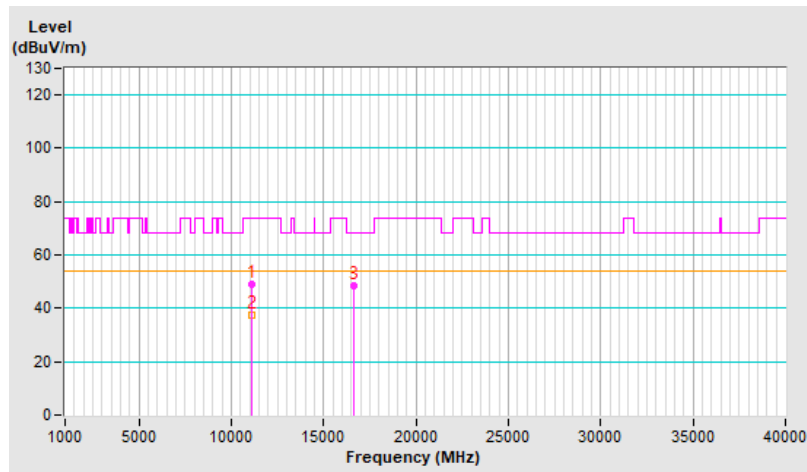




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	50.7 PK	74.0	-23.3	1.93 V	227	33.5	17.2
2	11100.00	39.8 AV	54.0	-14.2	1.93 V	227	22.6	17.2
3	#16650.00	48.7 PK	68.2	-19.5	1.43 V	37	27.5	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

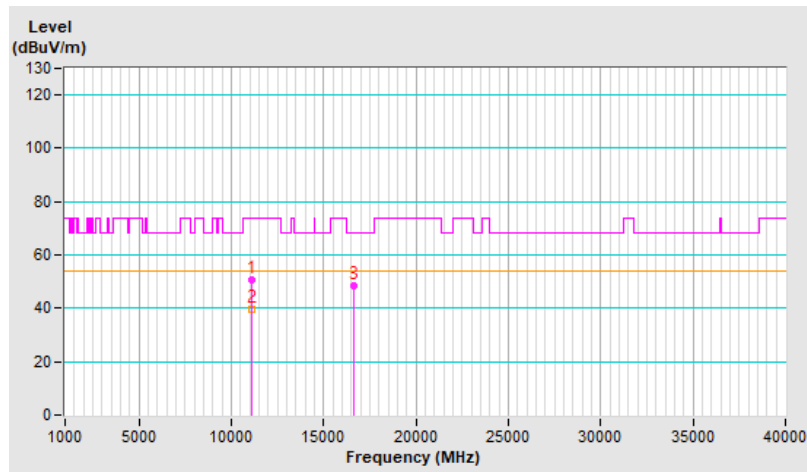


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.3 PK	74.0	-24.7	3.53 H	53	32.5	16.8
2	11340.00	38.4 AV	54.0	-15.6	3.53 H	53	21.6	16.8
3	#17010.00	50.8 PK	68.2	-17.4	1.48 H	151	29.8	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

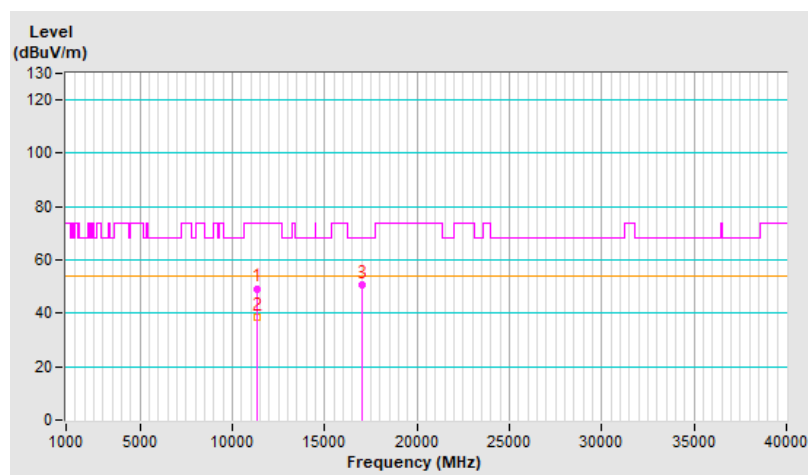


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.7 PK	74.0	-24.3	1.86 V	213	32.9	16.8
2	11340.00	38.4 AV	54.0	-15.6	1.86 V	213	21.6	16.8
3	#17010.00	49.7 PK	68.2	-18.5	1.47 V	27	28.7	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

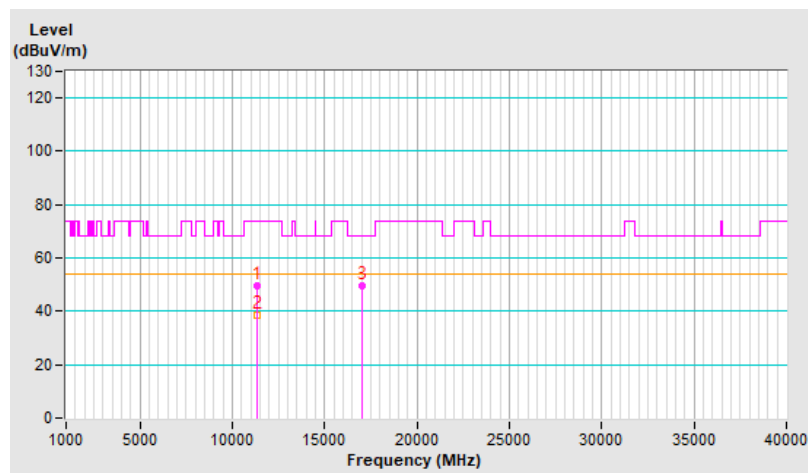


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 142 : 5710 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	49.1 PK	74.0	-24.9	3.52 H	46	32.4	16.7
2	11420.00	38.3 AV	54.0	-15.7	3.52 H	46	21.6	16.7
3	#17130.00	51.2 PK	68.2	-17.0	1.48 H	158	30.9	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

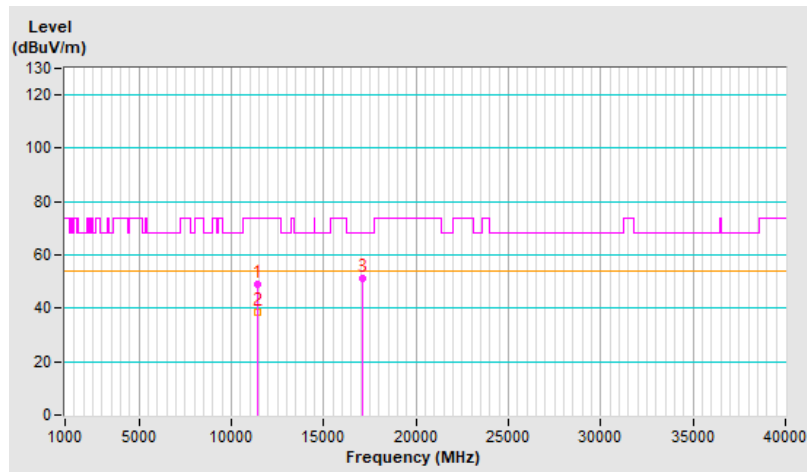


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 142 : 5710 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.3 PK	74.0	-23.7	1.88 V	225	33.6	16.7
2	11420.00	38.3 AV	54.0	-15.7	1.88 V	225	21.6	16.7
3	#17130.00	49.6 PK	68.2	-18.6	1.42 V	32	29.3	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

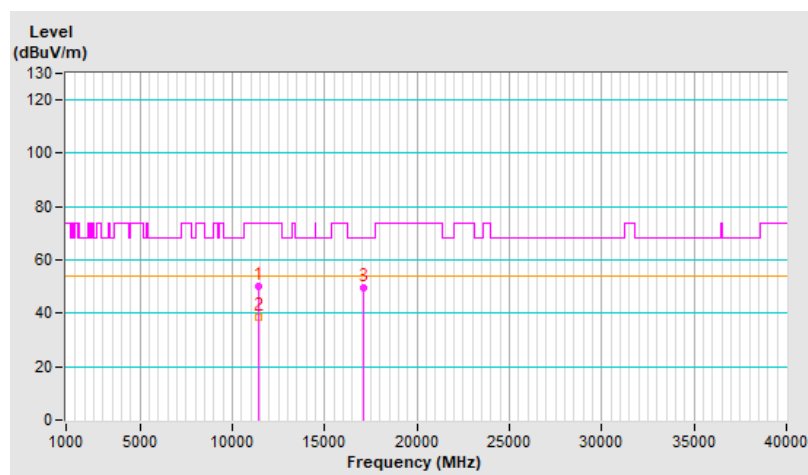




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 151 : 5755 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	49.5 PK	74.0	-24.5	3.54 H	49	32.7	16.8
2	11510.00	38.7 AV	54.0	-15.3	3.54 H	49	21.9	16.8
3	#17265.00	50.6 PK	68.2	-17.6	1.50 H	164	30.2	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

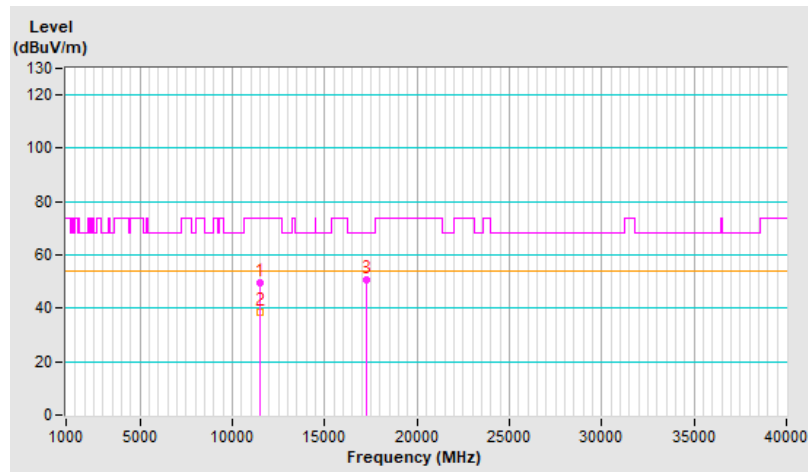


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 151 : 5755 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	50.1 PK	74.0	-23.9	2.17 V	199	33.3	16.8
2	11510.00	38.7 AV	54.0	-15.3	2.17 V	199	21.9	16.8
3	#17265.00	51.5 PK	68.2	-16.7	1.59 V	9	31.1	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

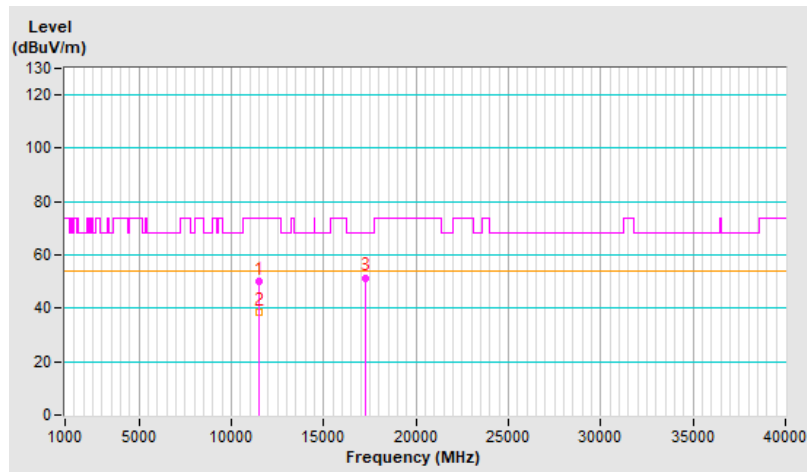


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 159 : 5795 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	49.8 PK	74.0	-24.2	3.55 H	37	33.0	16.8
2	11590.00	39.2 AV	54.0	-14.8	3.55 H	37	22.4	16.8
3	#17385.00	50.7 PK	68.2	-17.5	1.38 H	143	29.2	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

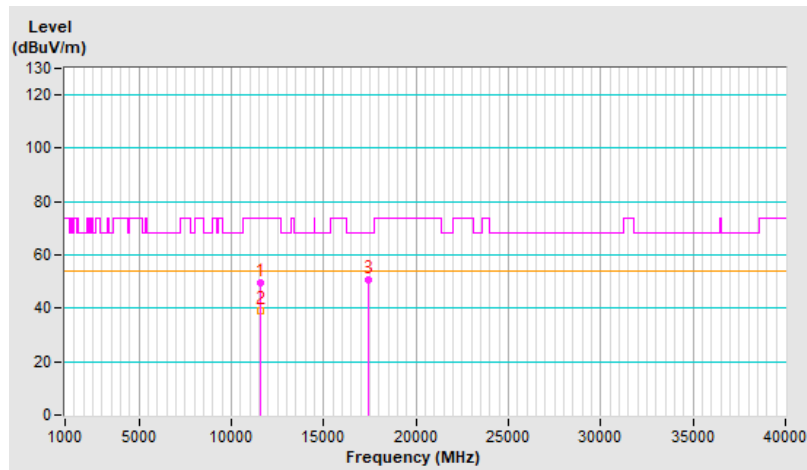


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 159 : 5795 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	50.6 PK	74.0	-23.4	2.08 V	216	33.8	16.8
2	11590.00	39.1 AV	54.0	-14.9	2.08 V	216	22.3	16.8
3	#17385.00	52.0 PK	68.2	-16.2	1.48 V	25	30.5	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

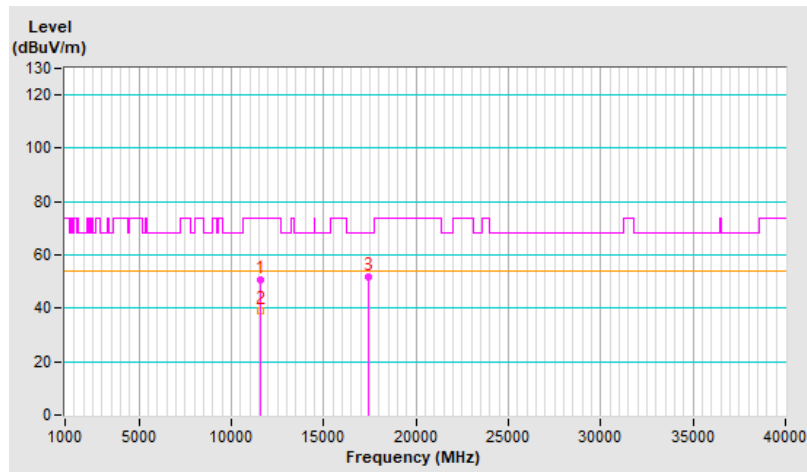


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.9 PK	68.2	-19.3	3.56 H	76	32.7	16.2
2	15630.00	48.7 PK	74.0	-25.3	1.53 H	168	32.0	16.7
3	15630.00	36.5 AV	54.0	-17.5	1.53 H	168	19.8	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

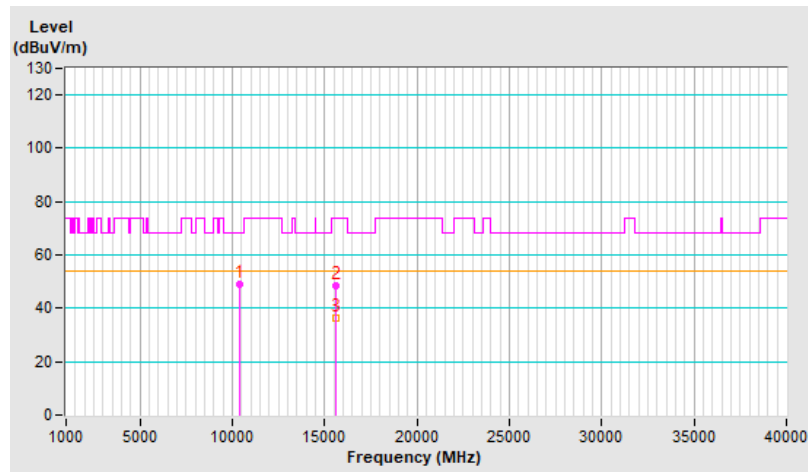


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.9 PK	68.2	-19.3	1.83 V	210	32.7	16.2
2	15630.00	48.2 PK	74.0	-25.8	1.50 V	23	31.5	16.7
3	15630.00	36.6 AV	54.0	-17.4	1.50 V	23	19.9	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

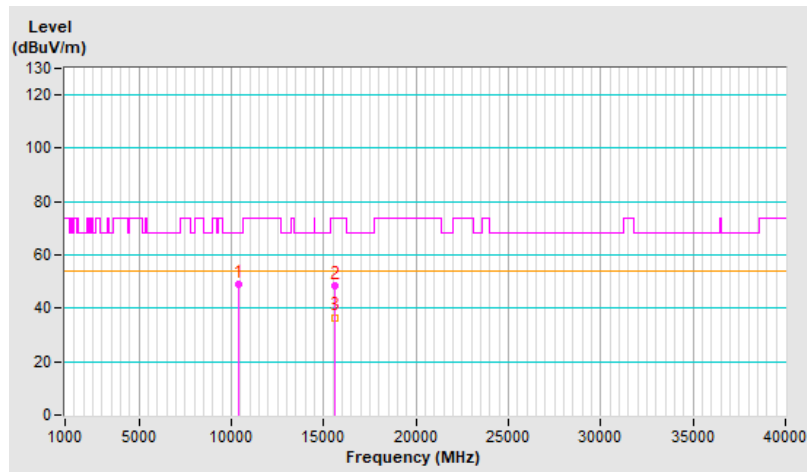


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 58 : 5290 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.4 PK	68.2	-18.8	3.55 H	73	33.0	16.4
2	15870.00	48.4 PK	74.0	-25.6	1.53 H	156	31.5	16.9
3	15870.00	36.1 AV	54.0	-17.9	1.53 H	156	19.2	16.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

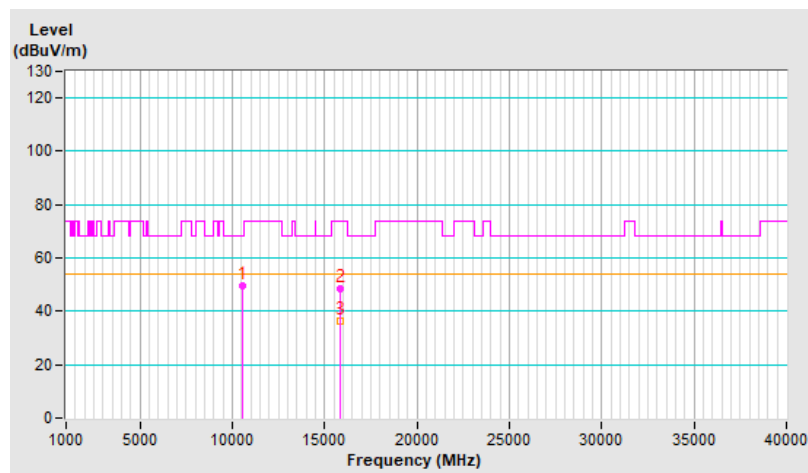


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 58 : 5290 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.5 PK	68.2	-18.7	1.91 V	226	33.1	16.4
2	15870.00	48.7 PK	74.0	-25.3	1.56 V	39	31.8	16.9
3	15870.00	36.7 AV	54.0	-17.3	1.56 V	39	19.8	16.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

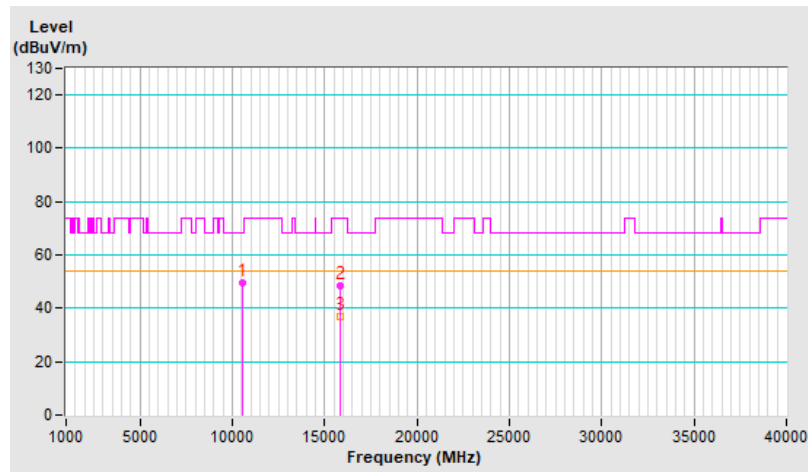




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 106 : 5530 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.5 PK	74.0	-24.5	3.65 H	57	32.4	17.1
2	11060.00	38.2 AV	54.0	-15.8	3.65 H	57	21.1	17.1
3	#16590.00	47.7 PK	68.2	-20.5	1.59 H	166	26.9	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

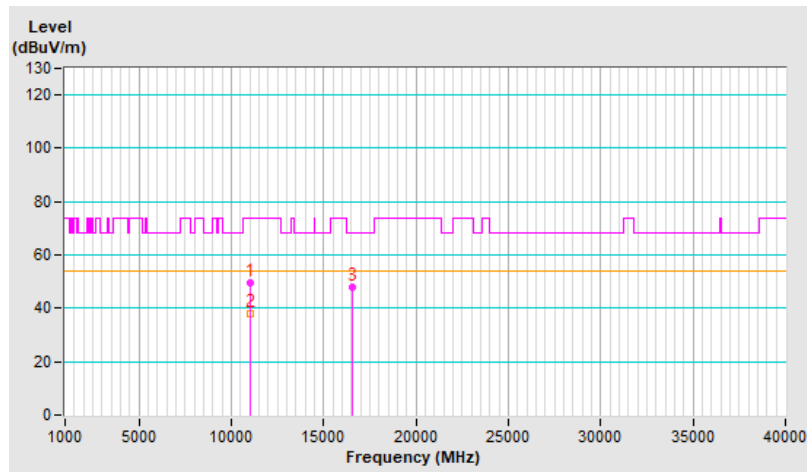




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 106 : 5530 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.7 PK	74.0	-24.3	1.83 V	216	32.6	17.1
2	11060.00	37.7 AV	54.0	-16.3	1.83 V	216	20.6	17.1
3	#16590.00	48.6 PK	68.2	-19.6	1.59 V	27	27.8	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

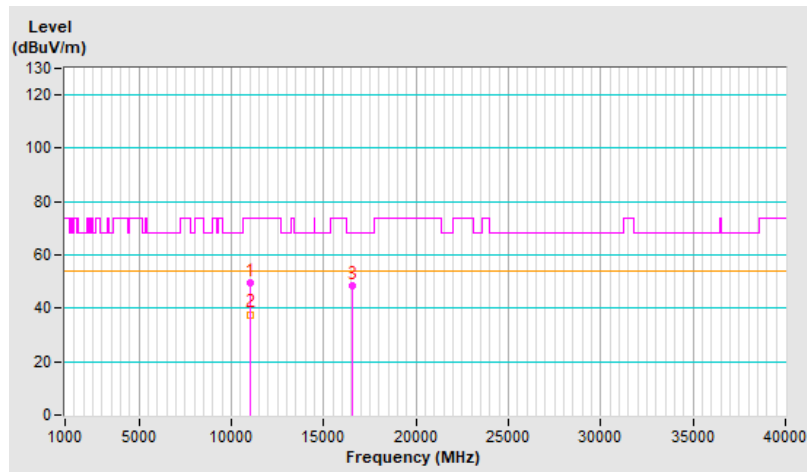


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 122 : 5610 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.1 PK	74.0	-24.9	3.51 H	40	32.5	16.6
2	11220.00	37.3 AV	54.0	-16.7	3.51 H	40	20.7	16.6
3	#16830.00	47.5 PK	68.2	-20.7	1.41 H	167	26.3	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

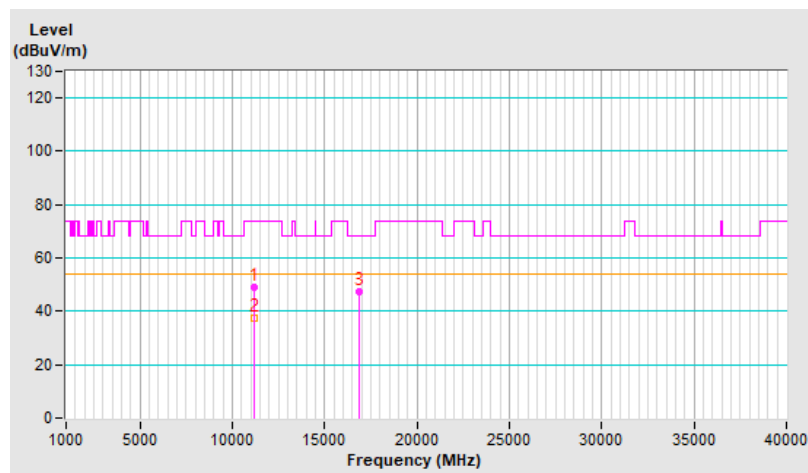


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 122 : 5610 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.6 PK	74.0	-24.4	1.92 V	212	33.0	16.6
2	11220.00	37.6 AV	54.0	-16.4	1.92 V	212	21.0	16.6
3	#16830.00	49.0 PK	68.2	-19.2	1.57 V	14	27.8	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

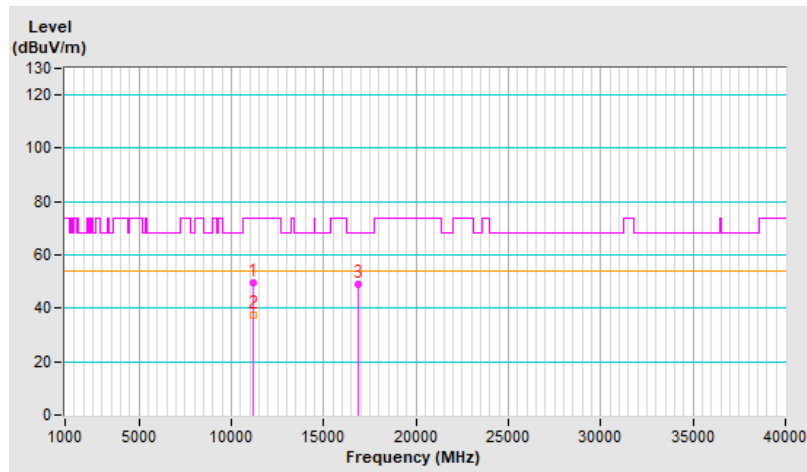


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 138 : 5690 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.7 PK	74.0	-24.3	3.52 H	42	32.9	16.8
2	11380.00	38.7 AV	54.0	-15.3	3.52 H	42	21.9	16.8
3	#17070.00	51.3 PK	68.2	-16.9	1.33 H	124	30.6	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

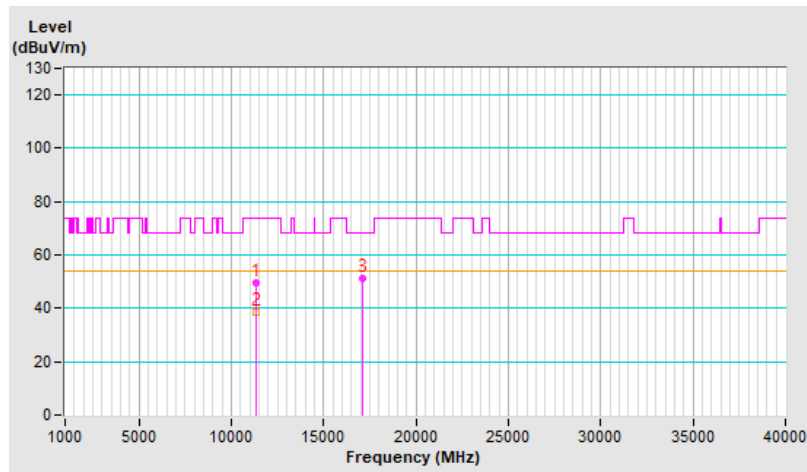


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 138 : 5690 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	50.8 PK	74.0	-23.2	2.08 V	233	34.0	16.8
2	11380.00	38.8 AV	54.0	-15.2	2.08 V	233	22.0	16.8
3	#17070.00	51.7 PK	68.2	-16.5	1.52 V	15	31.0	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

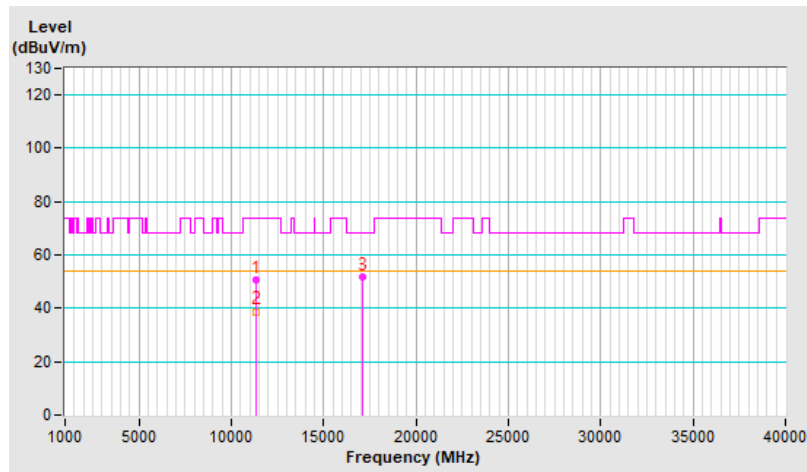


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	48.6 PK	74.0	-25.4	3.52 H	26	31.8	16.8
2	11550.00	37.8 AV	54.0	-16.2	3.52 H	26	21.0	16.8
3	#17325.00	50.2 PK	68.2	-18.0	1.40 H	143	29.3	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

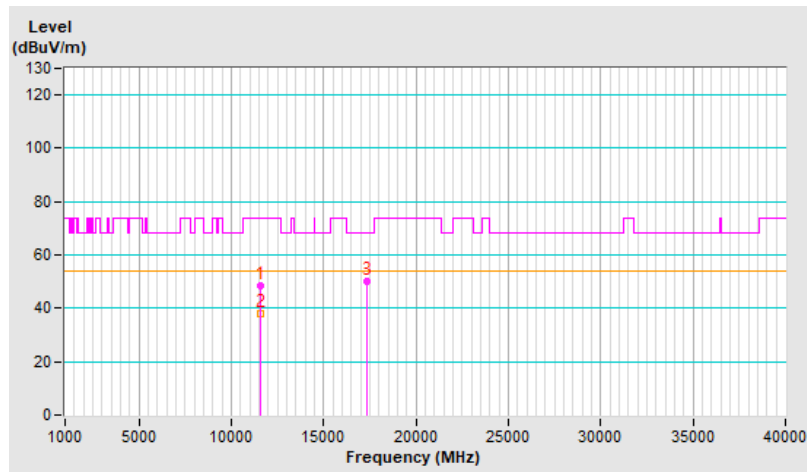


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	50.6 PK	74.0	-23.4	2.08 V	232	33.8	16.8
2	11550.00	38.2 AV	54.0	-15.8	2.08 V	232	21.4	16.8
3	#17325.00	51.7 PK	68.2	-16.5	1.46 V	34	30.8	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

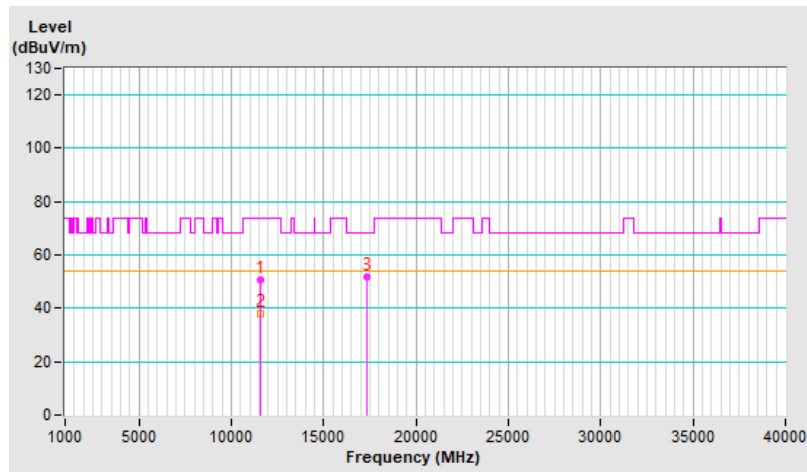




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 50 : 5250 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.4 PK	68.2	-17.8	3.57 H	41	34.5	15.9
2	15750.00	47.1 PK	74.0	-26.9	1.45 H	193	30.3	16.8
3	15750.00	35.5 AV	54.0	-18.5	1.45 H	193	18.7	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

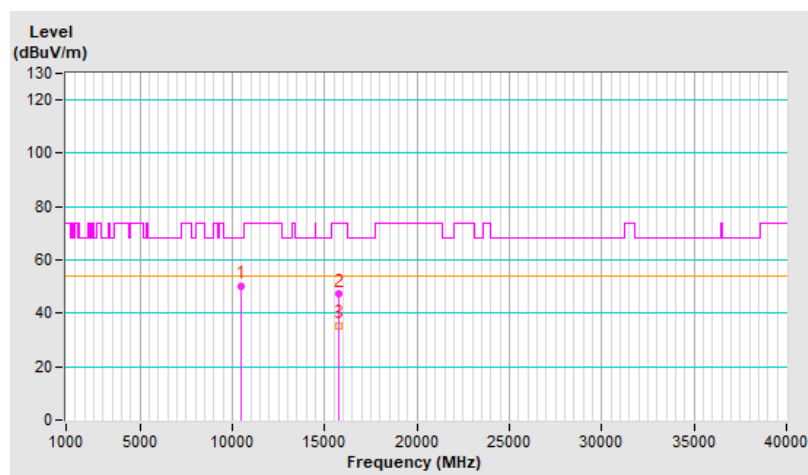


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 50 : 5250 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.1 PK	68.2	-18.1	1.83 V	221	34.2	15.9
2	15750.00	49.0 PK	74.0	-25.0	1.54 V	11	32.2	16.8
3	15750.00	36.7 AV	54.0	-17.3	1.54 V	11	19.9	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

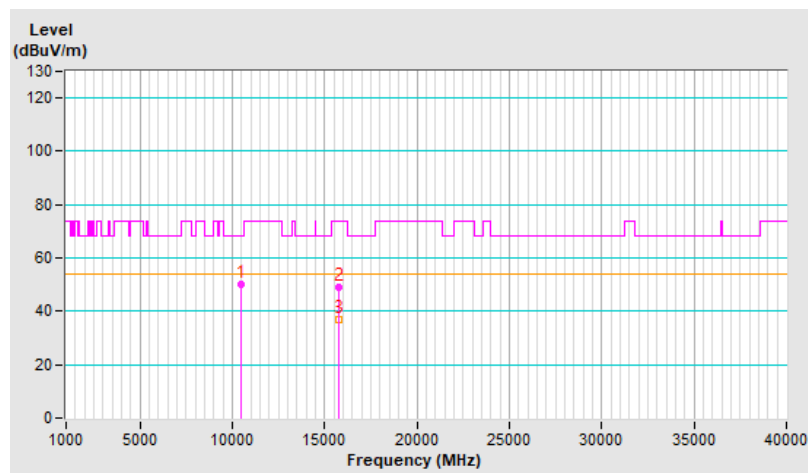


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 114 : 5570 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.6 PK	74.0	-23.4	3.54 H	49	33.7	16.9
2	11140.00	39.0 AV	54.0	-15.0	3.54 H	49	22.1	16.9
3	#16710.00	47.3 PK	68.2	-20.9	1.43 H	201	25.9	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

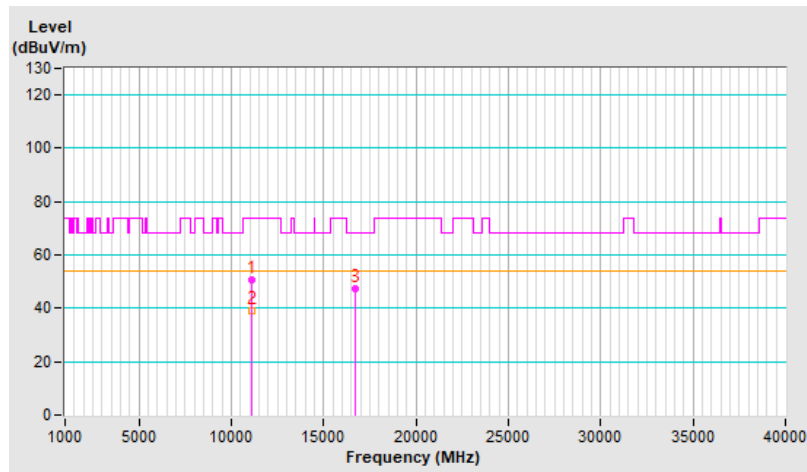


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 114 : 5570 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	50.7 PK	74.0	-23.3	1.83 V	227	33.8	16.9
2	11140.00	38.7 AV	54.0	-15.3	1.83 V	227	21.8	16.9
3	#16710.00	49.1 PK	68.2	-19.1	1.52 V	17	27.7	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

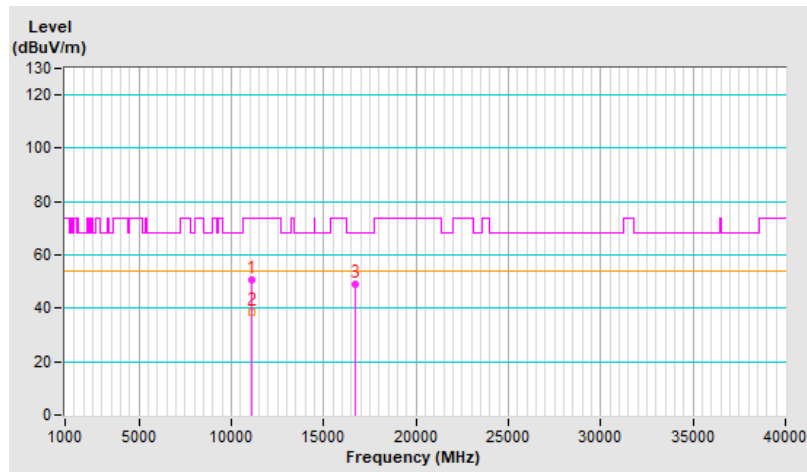


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.7 PK	68.2	-18.5	3.56 H	78	33.8	15.9
2	15540.00	49.4 PK	74.0	-24.6	1.56 H	154	32.9	16.5
3	15540.00	37.1 AV	54.0	-16.9	1.56 H	154	20.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

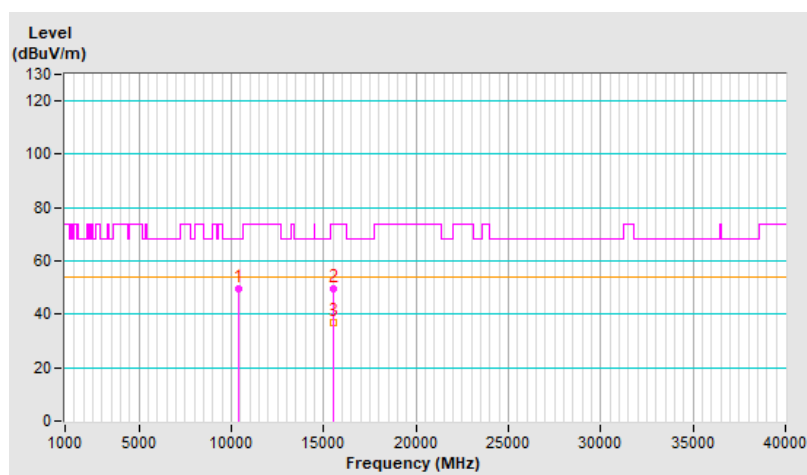


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	51.4 PK	68.2	-16.8	2.00 V	204	35.5	15.9
2	15540.00	49.0 PK	74.0	-25.0	1.42 V	20	32.5	16.5
3	15540.00	36.7 AV	54.0	-17.3	1.42 V	20	20.2	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

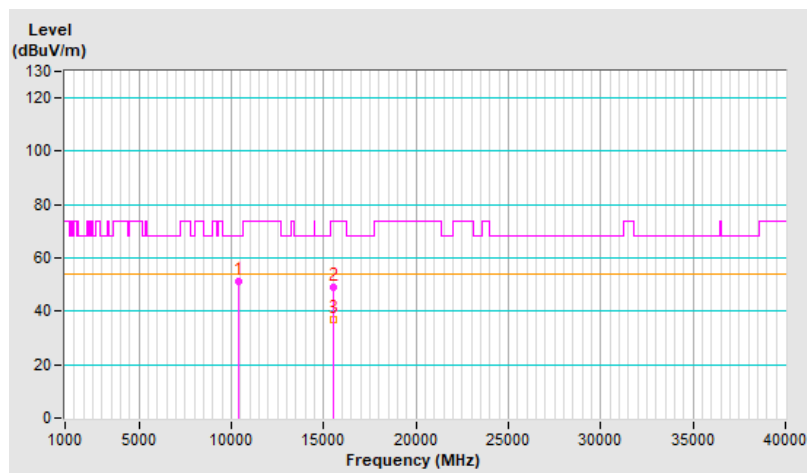


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	50.1 PK	68.2	-18.1	3.52 H	87	34.0	16.1
2	15600.00	49.8 PK	74.0	-24.2	1.60 H	141	33.2	16.6
3	15600.00	37.2 AV	54.0	-16.8	1.60 H	141	20.6	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

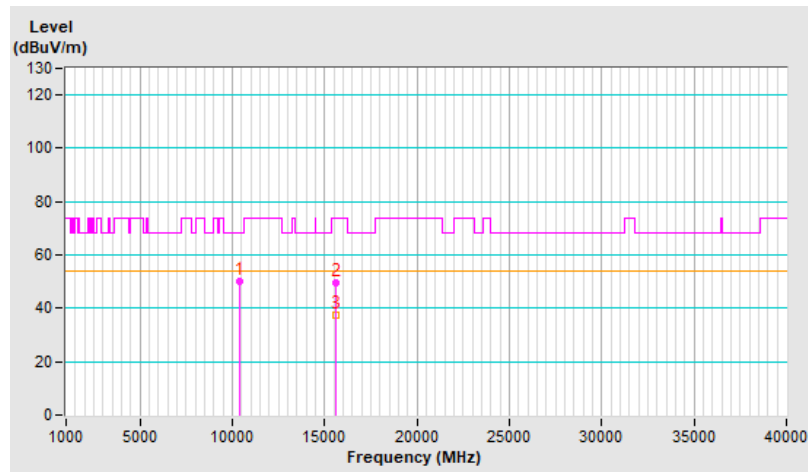


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	51.2 PK	68.2	-17.0	1.99 V	208	35.1	16.1
2	15600.00	48.3 PK	74.0	-25.7	1.40 V	9	31.7	16.6
3	15600.00	36.3 AV	54.0	-17.7	1.40 V	9	19.7	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

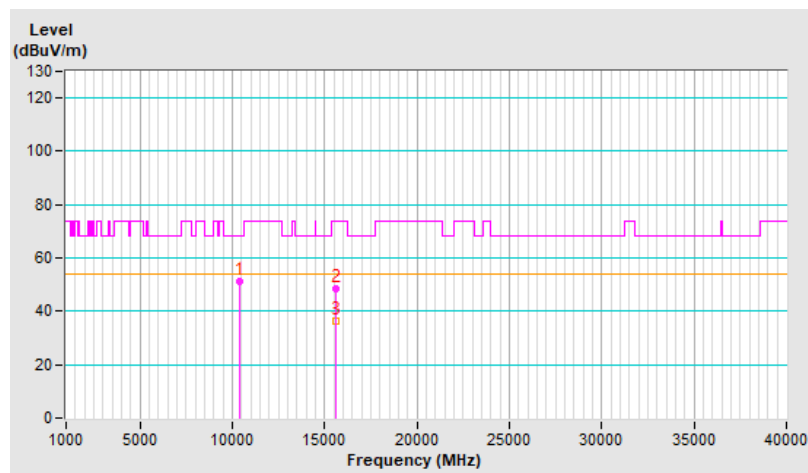




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	52.5 PK	68.2	-15.7	3.56 H	86	36.5	16.0
2	15720.00	49.0 PK	74.0	-25.0	1.54 H	168	32.2	16.8
3	15720.00	36.8 AV	54.0	-17.2	1.54 H	168	20.0	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

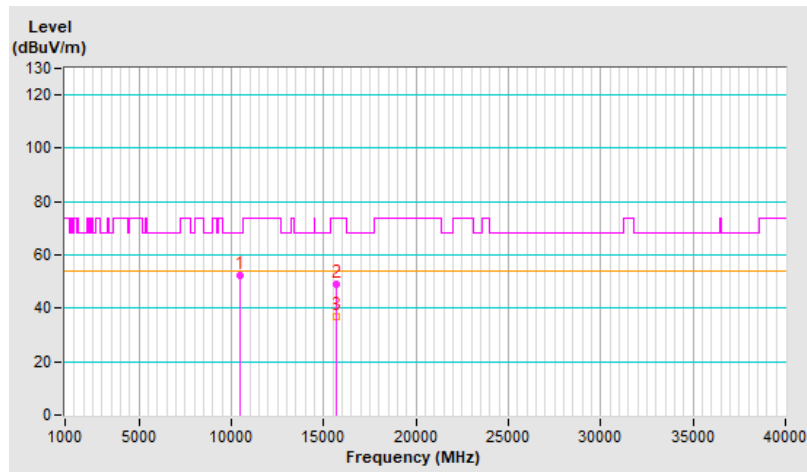


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	53.2 PK	68.2	-15.0	2.04 V	166	37.2	16.0
2	15720.00	48.9 PK	74.0	-25.1	1.50 V	27	32.1	16.8
3	15720.00	36.5 AV	54.0	-17.5	1.50 V	27	19.7	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

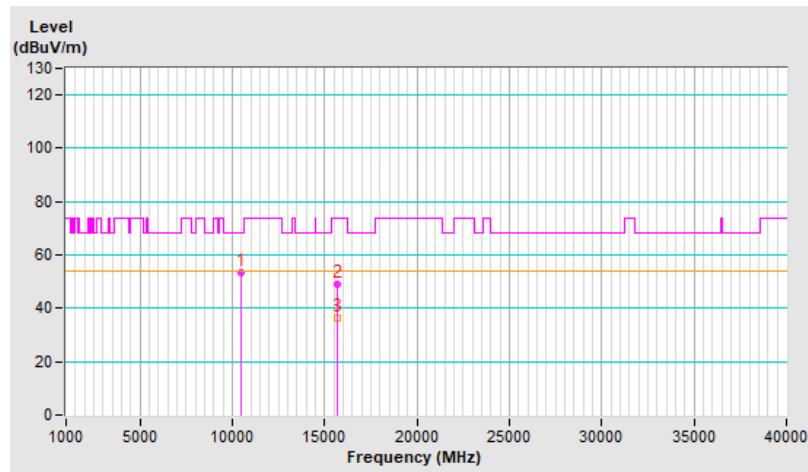


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	49.4 PK	74.0	-24.6	3.49 H	61	32.6	16.8
2	11490.00	38.2 AV	54.0	-15.8	3.49 H	61	21.4	16.8
3	#17235.00	50.2 PK	68.2	-18.0	1.44 H	149	29.9	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

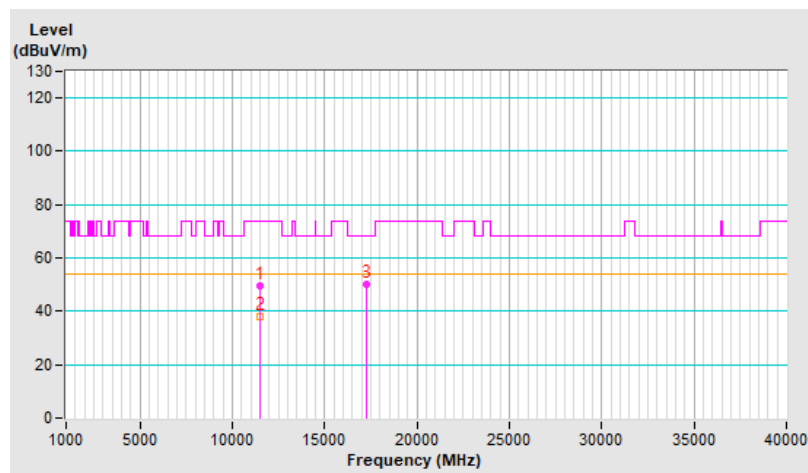


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	51.6 PK	74.0	-22.4	2.19 V	201	34.8	16.8
2	11490.00	42.2 AV	54.0	-11.8	2.19 V	201	25.4	16.8
3	#17235.00	50.8 PK	68.2	-17.4	1.50 V	22	30.5	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

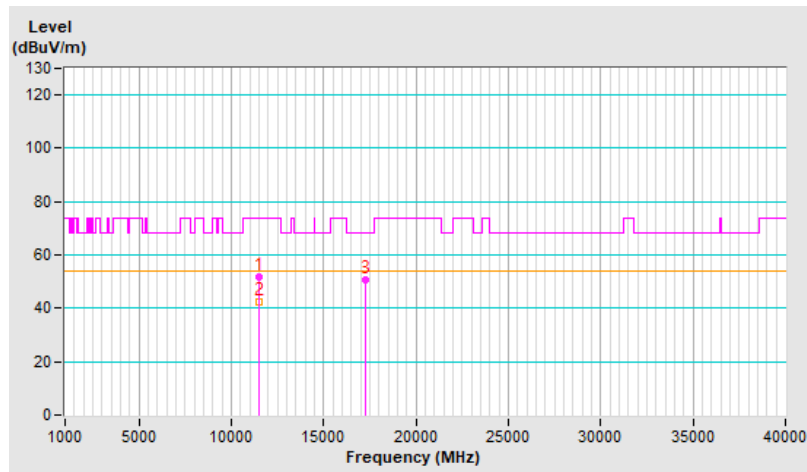


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	49.9 PK	74.0	-24.1	3.50 H	66	33.1	16.8
2	11570.00	38.5 AV	54.0	-15.5	3.50 H	66	21.7	16.8
3	#17355.00	50.8 PK	68.2	-17.4	1.44 H	154	29.6	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

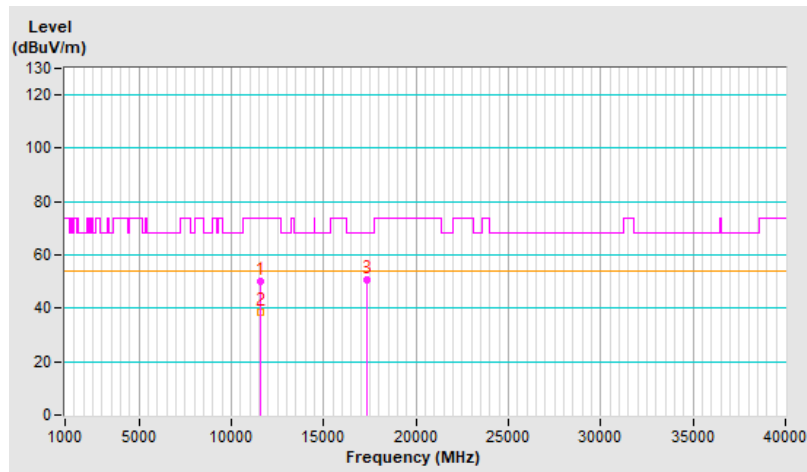


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	52.2 PK	74.0	-21.8	2.22 V	205	35.4	16.8
2	11570.00	42.8 AV	54.0	-11.2	2.22 V	205	26.0	16.8
3	#17355.00	51.9 PK	68.2	-16.3	1.46 V	20	30.7	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

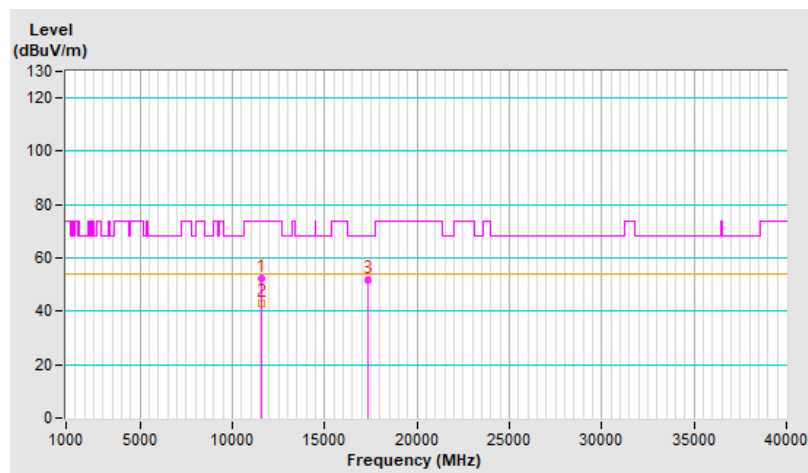


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	49.7 PK	74.0	-24.3	3.45 H	29	33.0	16.7
2	11650.00	38.6 AV	54.0	-15.4	3.45 H	29	21.9	16.7
3	#17475.00	50.7 PK	68.2	-17.5	1.53 H	165	28.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

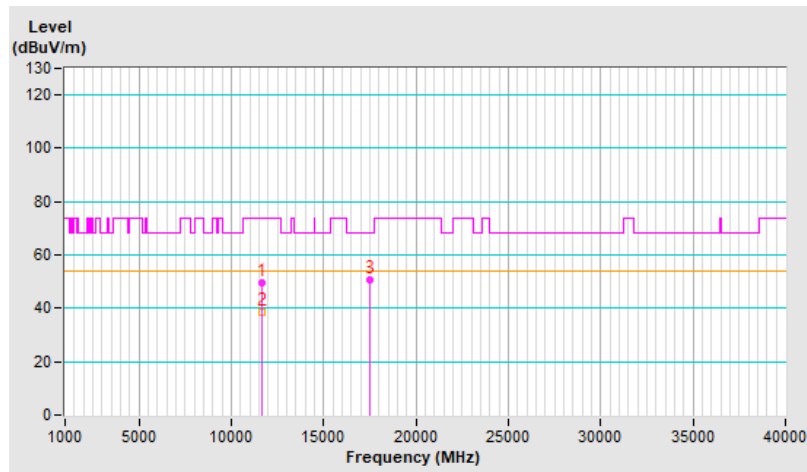


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.1 PK	74.0	-21.9	2.21 V	212	35.4	16.7
2	11650.00	42.9 AV	54.0	-11.1	2.21 V	212	26.2	16.7
3	#17475.00	51.7 PK	68.2	-16.5	1.65 V	42	29.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

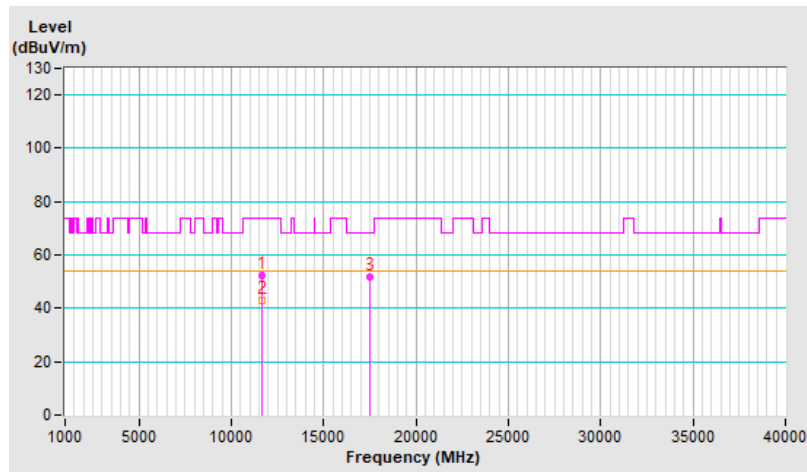




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.4 PK	68.2	-18.8	3.54 H	84	33.4	16.0
2	15570.00	49.0 PK	74.0	-25.0	1.44 H	110	32.5	16.5
3	15570.00	38.1 AV	54.0	-15.9	1.44 H	110	21.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

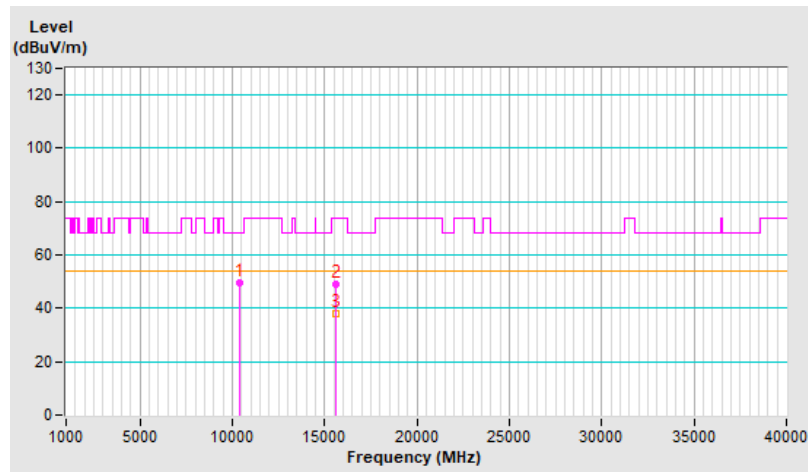


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.3 PK	68.2	-18.9	1.89 V	253	33.3	16.0
2	15570.00	48.8 PK	74.0	-25.2	1.50 V	33	32.3	16.5
3	15570.00	36.3 AV	54.0	-17.7	1.50 V	33	19.8	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

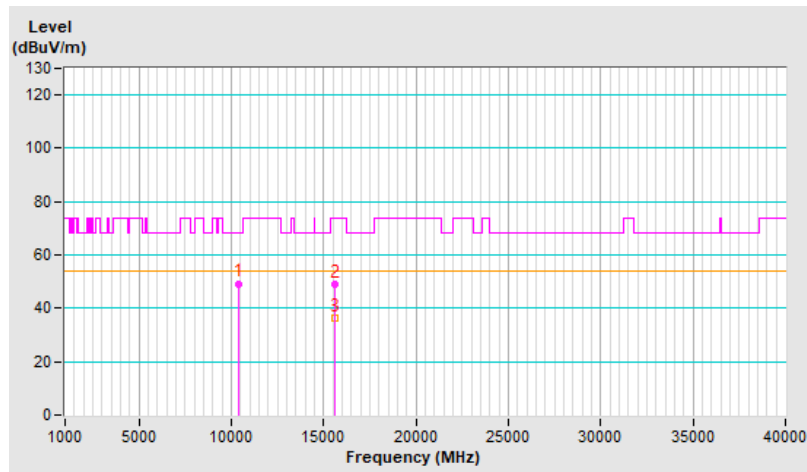


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	50.2 PK	68.2	-18.0	3.56 H	65	34.2	16.0
2	15690.00	48.8 PK	74.0	-25.2	1.50 H	144	32.1	16.7
3	15690.00	37.5 AV	54.0	-16.5	1.50 H	144	20.8	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

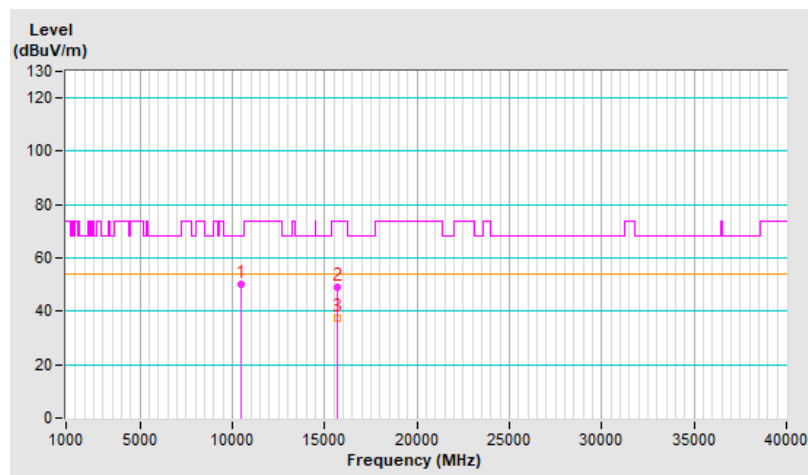


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	49.7 PK	68.2	-18.5	1.92 V	245	33.7	16.0
2	15690.00	48.7 PK	74.0	-25.3	1.54 V	39	32.0	16.7
3	15690.00	36.5 AV	54.0	-17.5	1.54 V	39	19.8	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

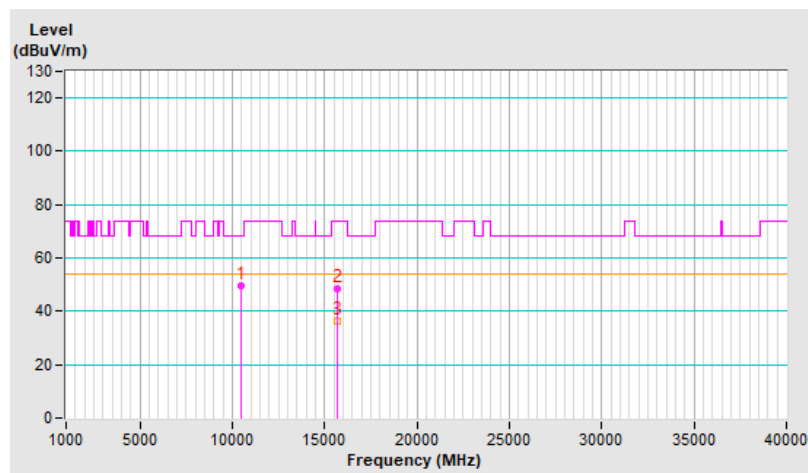


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 151 : 5755 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	50.3 PK	74.0	-23.7	3.43 H	46	33.5	16.8
2	11510.00	38.8 AV	54.0	-15.2	3.43 H	46	22.0	16.8
3	#17265.00	49.3 PK	68.2	-18.9	1.55 H	133	28.9	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

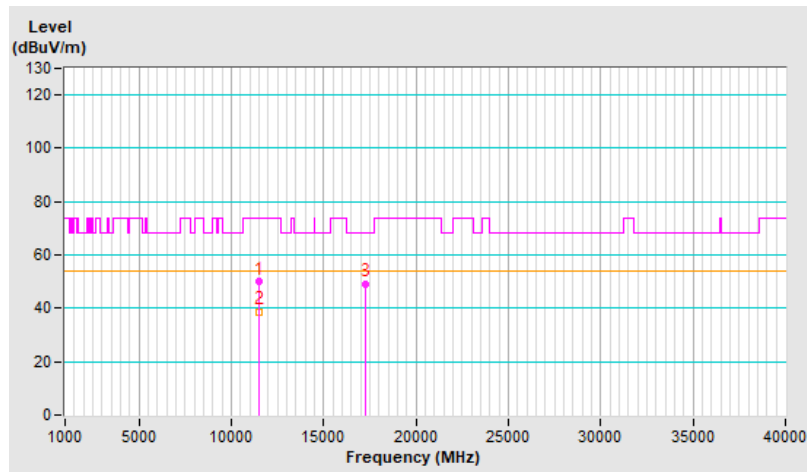


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 151 : 5755 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11510.00	50.3 PK	74.0	-23.7	2.24 V	178	33.5	16.8
2	11510.00	38.5 AV	54.0	-15.5	2.24 V	178	21.7	16.8
3	#17265.00	50.9 PK	68.2	-17.3	1.49 V	25	30.5	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

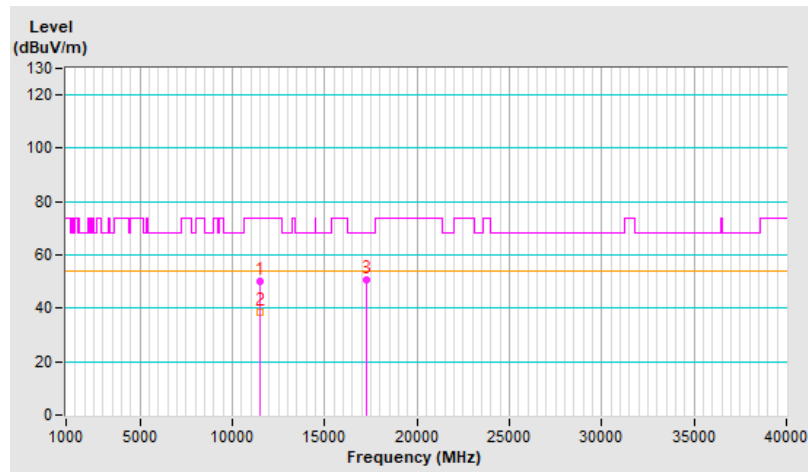


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 159 : 5795 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	50.1 PK	74.0	-23.9	3.60 H	46	33.3	16.8
2	11590.00	38.7 AV	54.0	-15.3	3.60 H	46	21.9	16.8
3	#17385.00	49.7 PK	68.2	-18.5	1.50 H	137	28.2	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

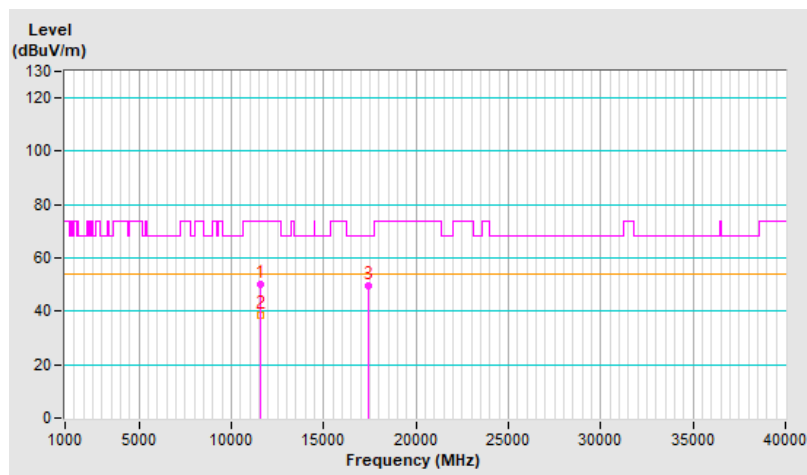


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 159 : 5795 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	50.6 PK	74.0	-23.4	2.24 V	188	33.8	16.8
2	11590.00	38.7 AV	54.0	-15.3	2.24 V	188	21.9	16.8
3	#17385.00	52.6 PK	68.2	-15.6	1.50 V	0	31.1	21.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

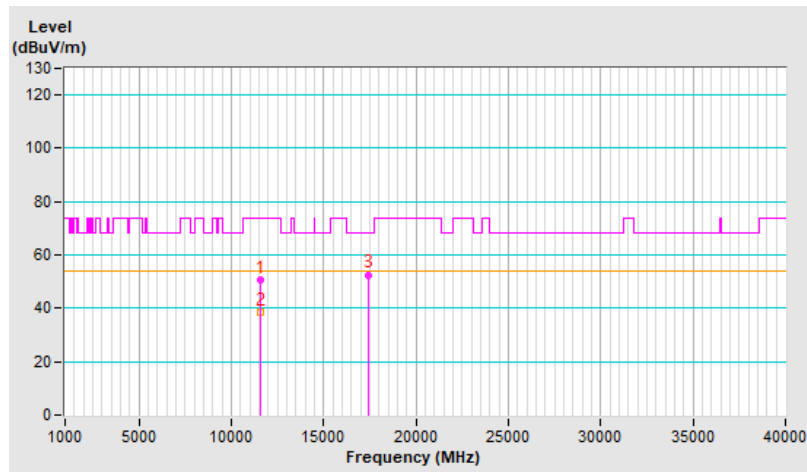




<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	50.0 PK	68.2	-18.2	3.74 H	72	33.8	16.2
2	15630.00	49.4 PK	74.0	-24.6	1.45 H	131	32.7	16.7
3	15630.00	38.3 AV	54.0	-15.7	1.45 H	131	21.6	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

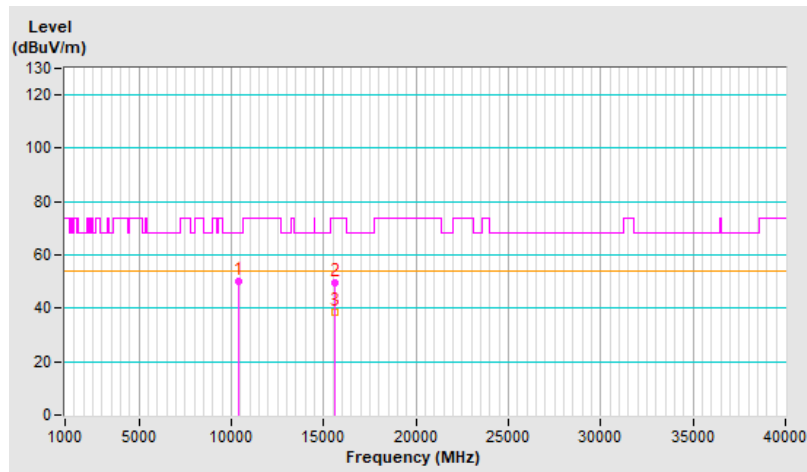


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	49.9 PK	68.2	-18.3	1.85 V	214	33.7	16.2
2	15630.00	49.4 PK	74.0	-24.6	1.60 V	49	32.7	16.7
3	15630.00	37.2 AV	54.0	-16.8	1.60 V	49	20.5	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

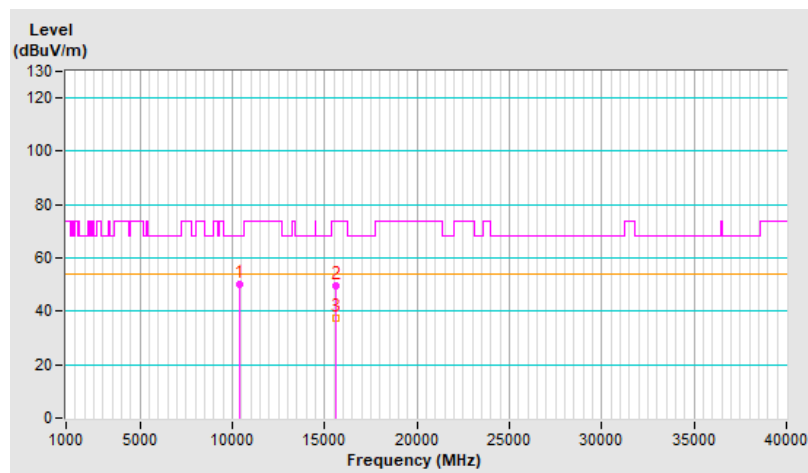


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	50.1 PK	74.0	-23.9	3.56 H	15	33.3	16.8
2	11550.00	39.0 AV	54.0	-15.0	3.56 H	15	22.2	16.8
3	#17325.00	50.8 PK	68.2	-17.4	1.42 H	167	29.9	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

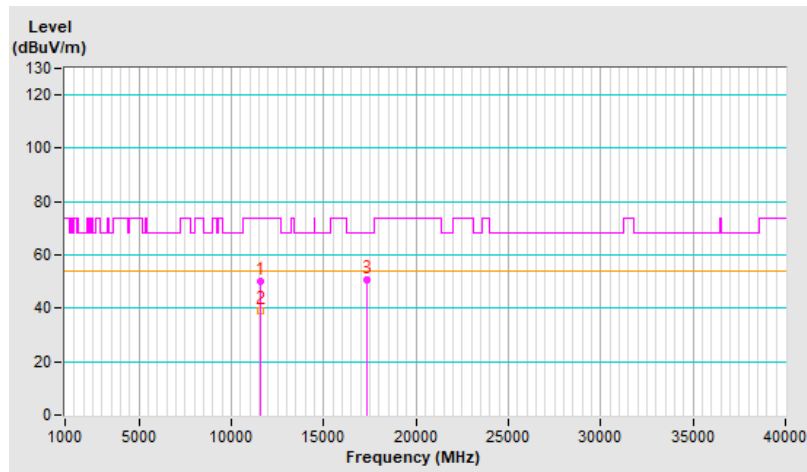


<b>RF Mode</b>	802.11be (EHT80)	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	49.8 PK	74.0	-24.2	2.17 V	202	33.0	16.8
2	11550.00	38.1 AV	54.0	-15.9	2.17 V	202	21.3	16.8
3	#17325.00	51.5 PK	68.2	-16.7	1.46 V	44	30.6	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

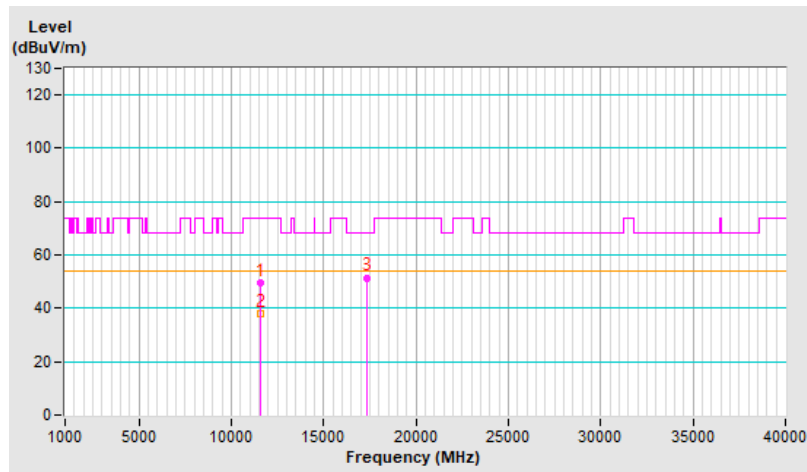


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.2 PK	68.2	-20.0	3.48 H	39	32.3	15.9
2	15540.00	48.0 PK	74.0	-26.0	1.39 H	158	31.5	16.5
3	15540.00	38.1 AV	54.0	-15.9	1.39 H	158	21.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

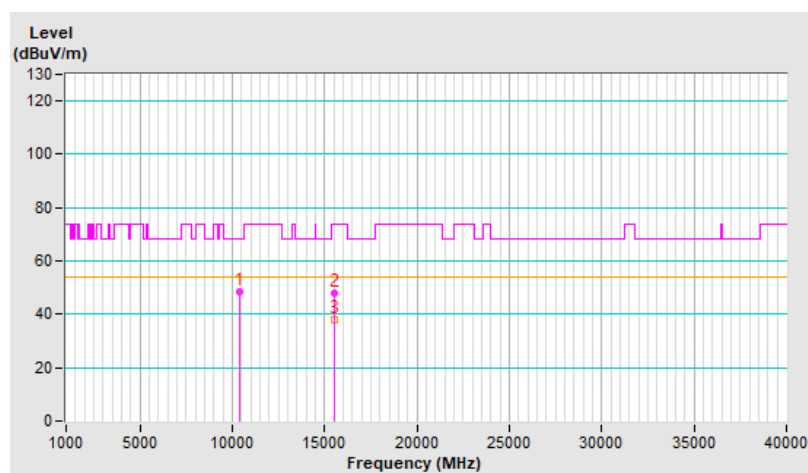


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	2.00 V	215	32.9	15.9
2	15540.00	48.2 PK	74.0	-25.8	1.49 V	28	31.7	16.5
3	15540.00	38.5 AV	54.0	-15.5	1.49 V	28	22.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

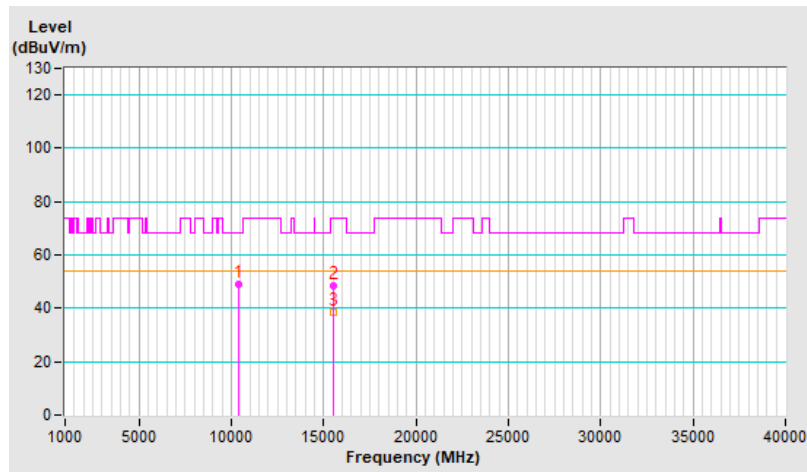


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.46 H	29	31.9	16.6
2	10640.00	37.2 AV	54.0	-16.8	3.46 H	29	20.6	16.6
3	15960.00	47.9 PK	74.0	-26.1	1.38 H	158	30.8	17.1
4	15960.00	38.2 AV	54.0	-15.8	1.38 H	158	21.1	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

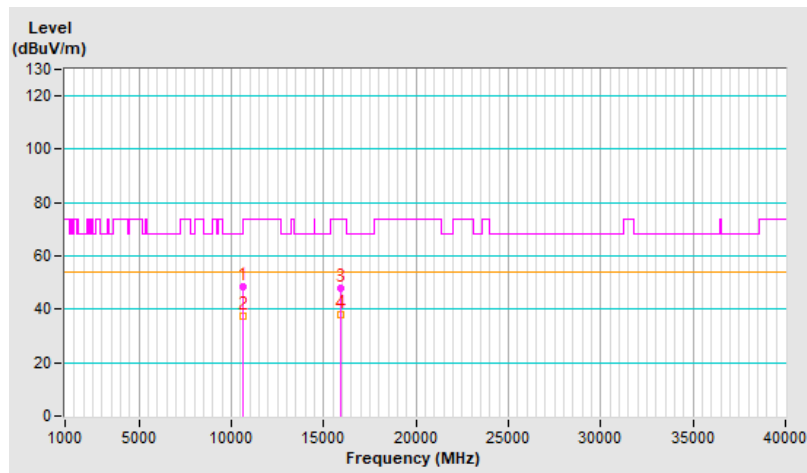


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.8 PK	74.0	-25.2	2.10 V	207	32.2	16.6
2	10640.00	37.7 AV	54.0	-16.3	2.10 V	207	21.1	16.6
3	15960.00	48.7 PK	74.0	-25.3	1.59 V	36	31.6	17.1
4	15960.00	38.6 AV	54.0	-15.4	1.59 V	36	21.5	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

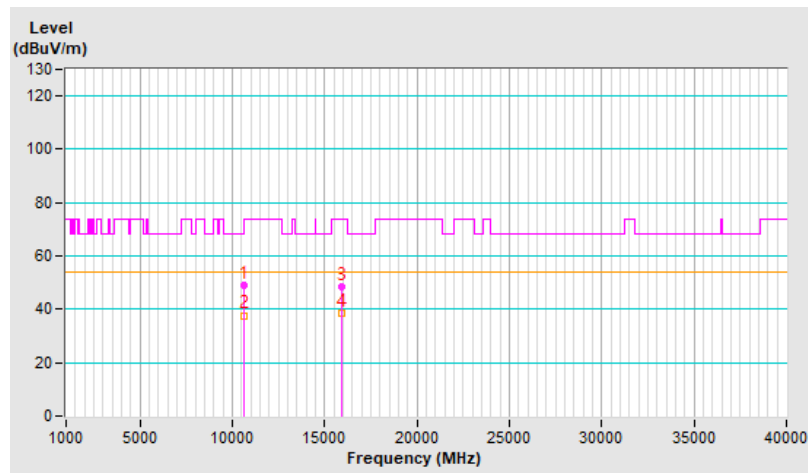




<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.3 PK	74.0	-25.7	3.52 H	25	31.2	17.1
2	11000.00	37.1 AV	54.0	-16.9	3.52 H	25	20.0	17.1
3	#16500.00	47.9 PK	68.2	-20.3	1.33 H	168	28.4	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

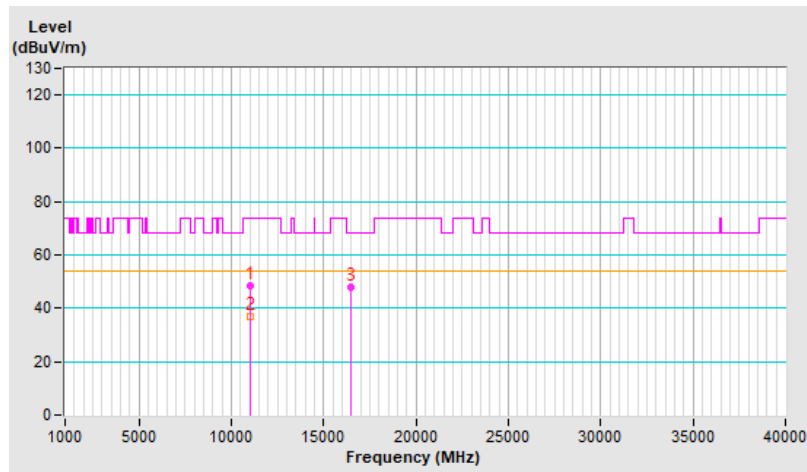


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.0 PK	74.0	-25.0	2.07 V	209	31.9	17.1
2	11000.00	37.8 AV	54.0	-16.2	2.07 V	209	20.7	17.1
3	#16500.00	48.4 PK	68.2	-19.8	1.66 V	49	28.9	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

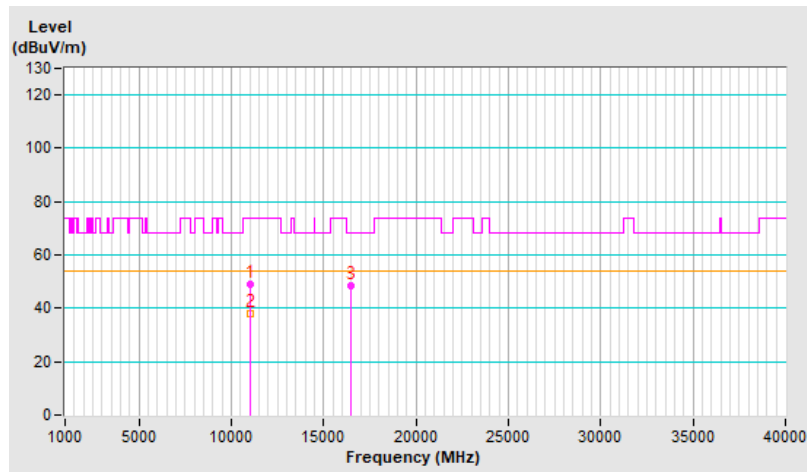


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.5 PK	74.0	-25.5	3.45 H	46	31.8	16.7
2	11400.00	37.2 AV	54.0	-16.8	3.45 H	46	20.5	16.7
3	#17100.00	48.5 PK	68.2	-19.7	1.38 H	165	28.1	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

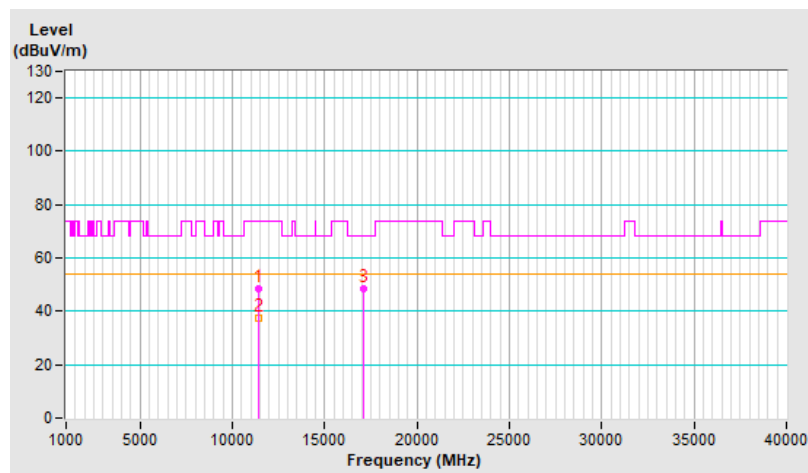


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.7 PK	74.0	-25.3	2.12 V	192	32.0	16.7
2	11400.00	37.7 AV	54.0	-16.3	2.12 V	192	21.0	16.7
3	#17100.00	48.7 PK	68.2	-19.5	1.63 V	28	28.3	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

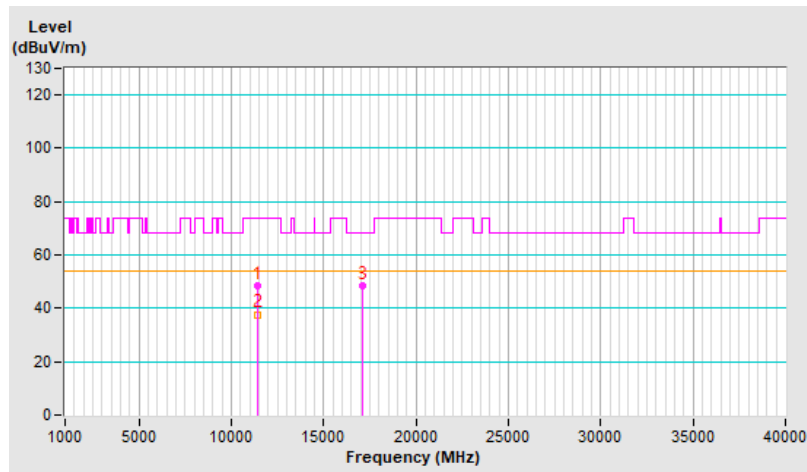


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	3.50 H	49	32.1	16.7
2	11440.00	37.5 AV	54.0	-16.5	3.50 H	49	20.8	16.7
3	#17160.00	48.8 PK	68.2	-19.4	1.44 H	175	28.5	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

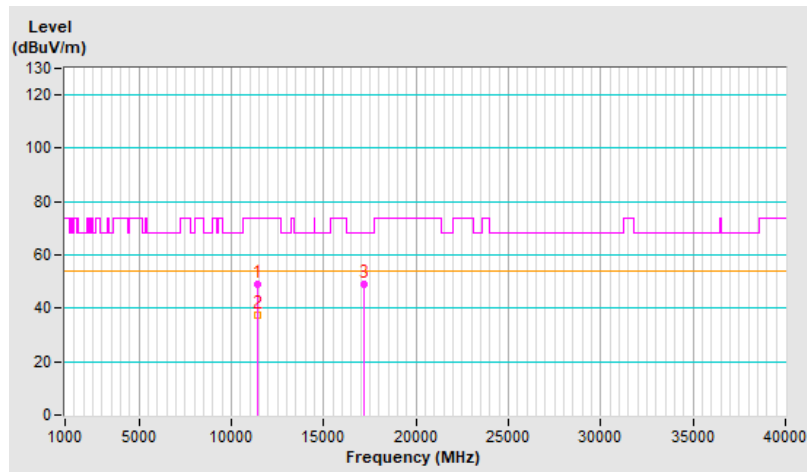




<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.1 PK	74.0	-24.9	2.10 V	205	32.4	16.7
2	11440.00	37.9 AV	54.0	-16.1	2.10 V	205	21.2	16.7
3	#17160.00	48.9 PK	68.2	-19.3	1.61 V	40	28.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

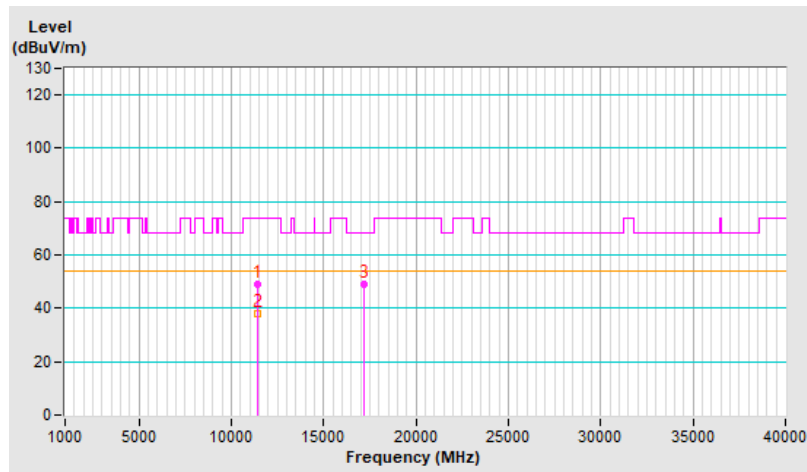


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	52.9 PK	74.0	-21.1	3.47 H	52	36.1	16.8
2	11490.00	43.5 AV	54.0	-10.5	3.47 H	52	26.7	16.8
3	#17235.00	52.3 PK	68.2	-15.9	1.40 H	177	32.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

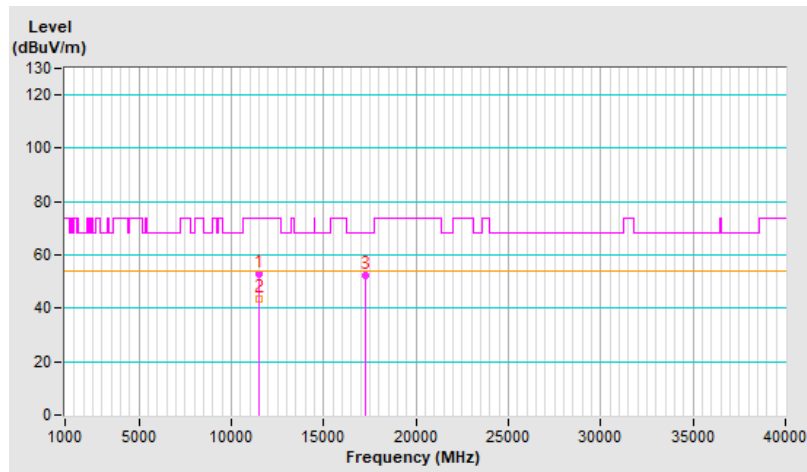


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.2 PK	74.0	-20.8	2.14 V	196	36.4	16.8
2	11490.00	43.3 AV	54.0	-10.7	2.14 V	196	26.5	16.8
3	#17235.00	52.6 PK	68.2	-15.6	1.54 V	64	32.3	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

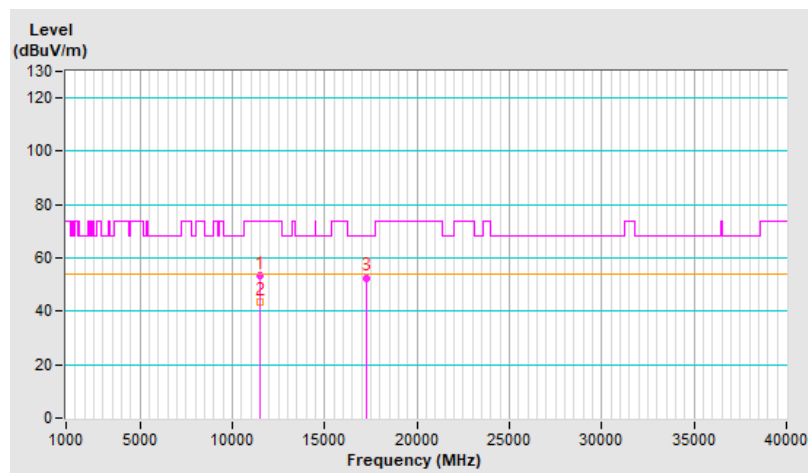




<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.0 PK	74.0	-21.0	3.54 H	57	36.3	16.7
2	11650.00	43.0 AV	54.0	-11.0	3.54 H	57	26.3	16.7
3	#17475.00	53.0 PK	68.2	-15.2	1.41 H	169	30.7	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

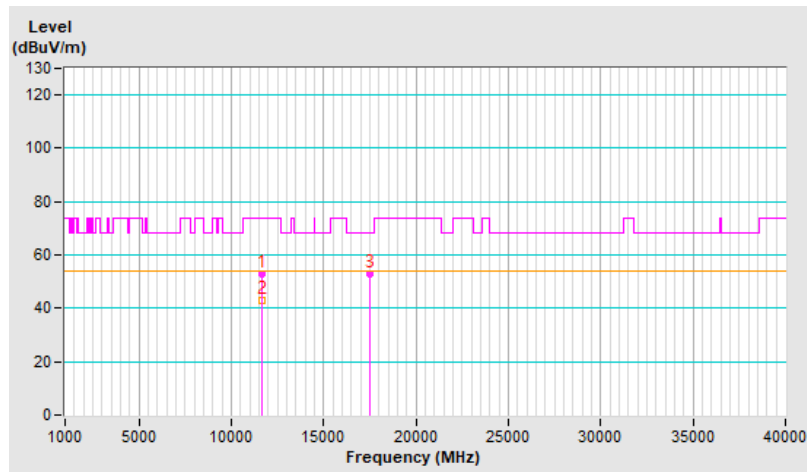


<b>RF Mode</b>	802.11ax (HE20) 26-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.4 PK	74.0	-20.6	2.09 V	193	36.7	16.7
2	11650.00	43.7 AV	54.0	-10.3	2.09 V	193	27.0	16.7
3	#17475.00	52.4 PK	68.2	-15.8	1.58 V	51	30.1	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

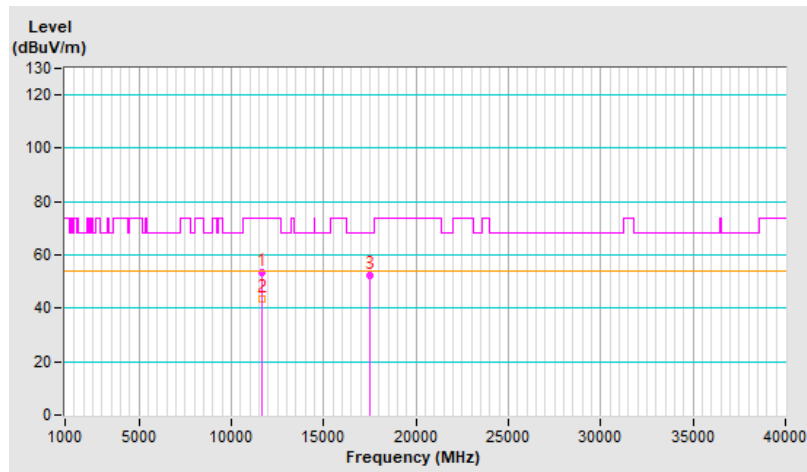


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.3 PK	68.2	-18.9	3.44 H	55	33.4	15.9
2	15540.00	47.4 PK	74.0	-26.6	1.43 H	190	30.9	16.5
3	15540.00	35.4 AV	54.0	-18.6	1.43 H	190	18.9	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

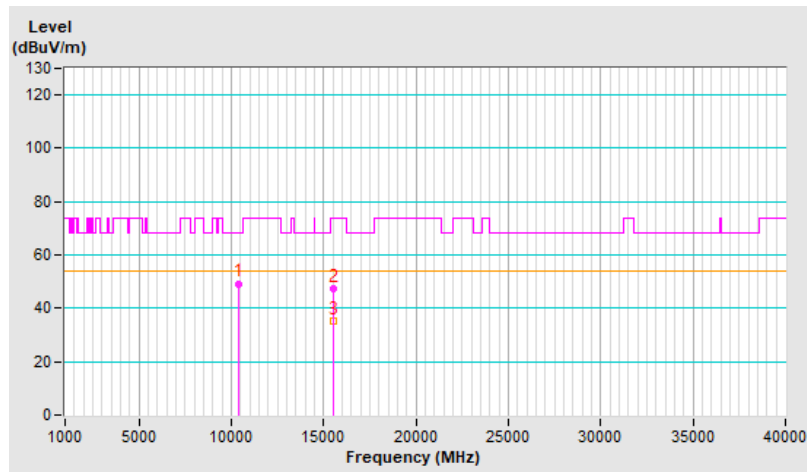


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.7 PK	68.2	-20.5	2.17 V	164	31.8	15.9
2	15540.00	48.5 PK	74.0	-25.5	1.61 V	63	32.0	16.5
3	15540.00	36.2 AV	54.0	-17.8	1.61 V	63	19.7	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

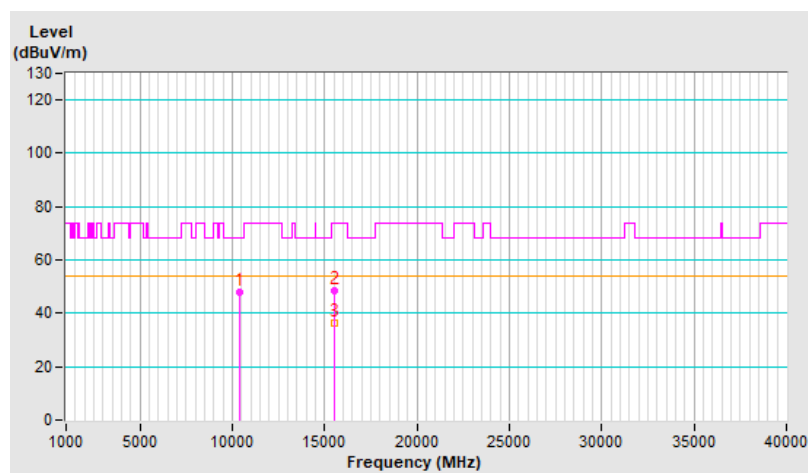


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	47.6 PK	74.0	-26.4	3.54 H	40	31.0	16.6
2	10640.00	35.9 AV	54.0	-18.1	3.54 H	40	19.3	16.6
3	15960.00	47.4 PK	74.0	-26.6	1.59 H	145	30.3	17.1
4	15960.00	36.2 AV	54.0	-17.8	1.59 H	145	19.1	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

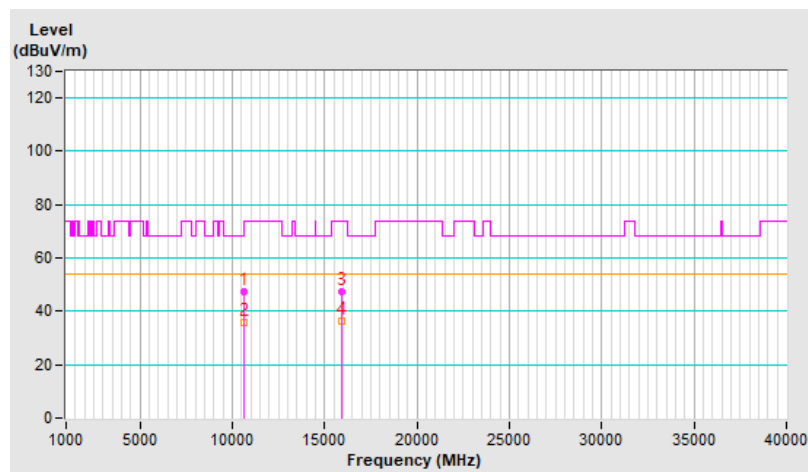


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.4 PK	74.0	-25.6	2.14 V	194	31.8	16.6
2	10640.00	37.0 AV	54.0	-17.0	2.14 V	194	20.4	16.6
3	15960.00	49.8 PK	74.0	-24.2	1.59 V	2	32.7	17.1
4	15960.00	37.2 AV	54.0	-16.8	1.59 V	2	20.1	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

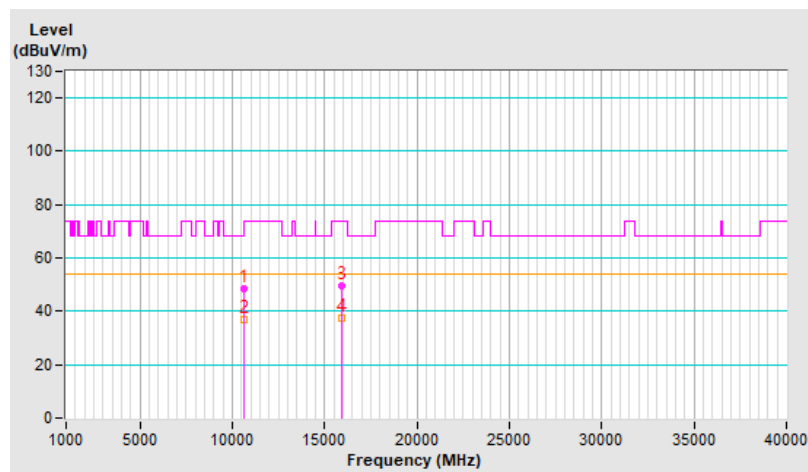


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	3.55 H	20	32.1	17.1
2	11000.00	37.8 AV	54.0	-16.2	3.55 H	20	20.7	17.1
3	#16500.00	49.1 PK	68.2	-19.1	1.43 H	170	29.6	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

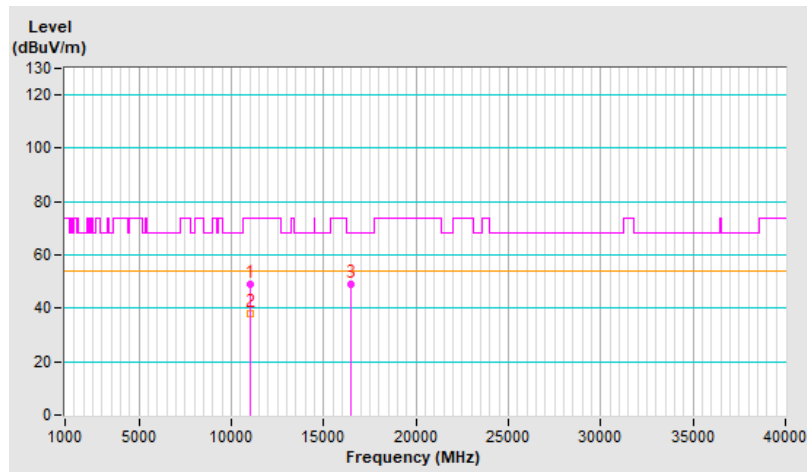




<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.0 PK	74.0	-25.0	1.98 V	203	31.9	17.1
2	11000.00	37.6 AV	54.0	-16.4	1.98 V	203	20.5	17.1
3	#16500.00	49.7 PK	68.2	-18.5	1.62 V	16	30.2	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

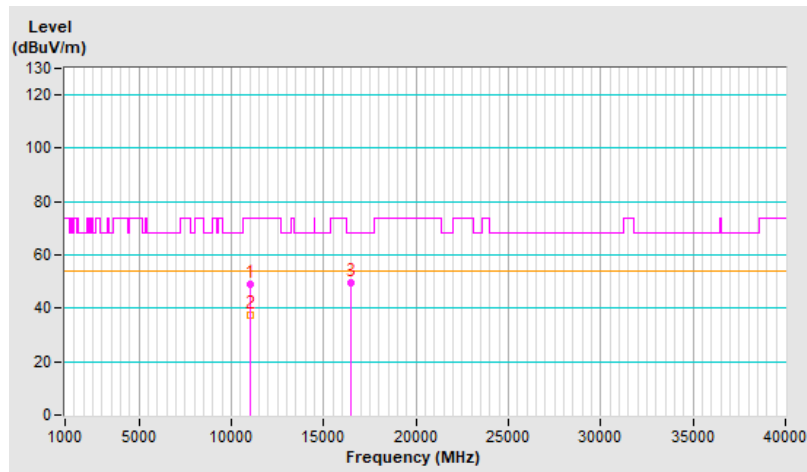




<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.9 PK	74.0	-24.1	3.49 H	43	33.2	16.7
2	11400.00	37.2 AV	54.0	-16.8	3.49 H	43	20.5	16.7
3	#17100.00	49.6 PK	68.2	-18.6	1.32 H	207	29.2	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

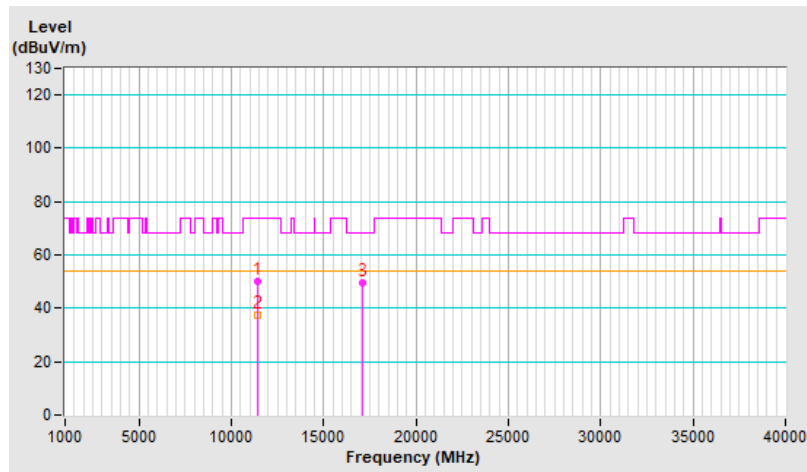


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.4 PK	74.0	-25.6	2.10 V	210	31.7	16.7
2	11400.00	37.2 AV	54.0	-16.8	2.10 V	210	20.5	16.7
3	#17100.00	49.2 PK	68.2	-19.0	1.55 V	52	28.8	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

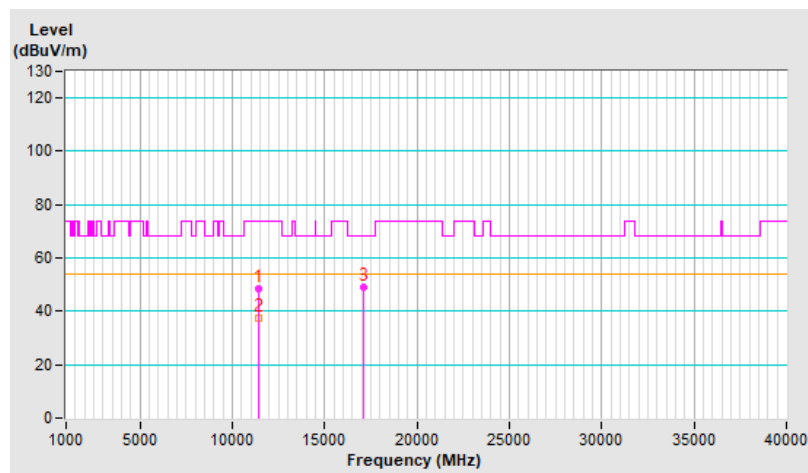


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.4 PK	74.0	-25.6	3.56 H	74	31.7	16.7
2	11440.00	37.5 AV	54.0	-16.5	3.56 H	74	20.8	16.7
3	#17160.00	49.8 PK	68.2	-18.4	1.59 H	170	29.5	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

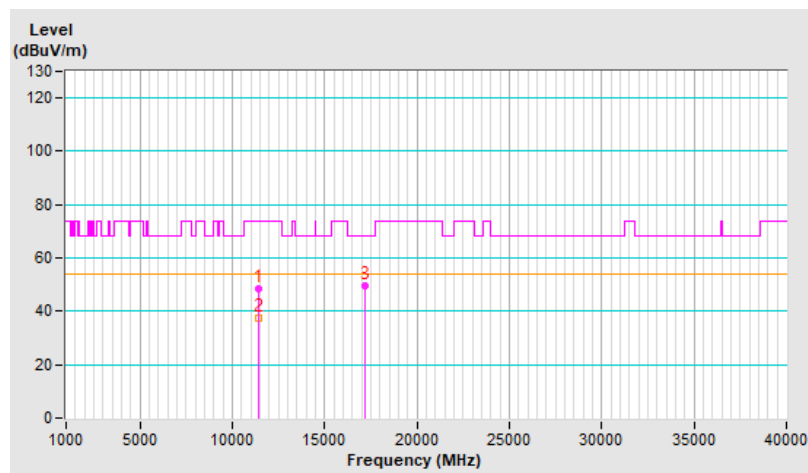


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.9 PK	74.0	-25.1	2.09 V	209	32.2	16.7
2	11440.00	37.5 AV	54.0	-16.5	2.09 V	209	20.8	16.7
3	#17160.00	49.3 PK	68.2	-18.9	1.62 V	49	29.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

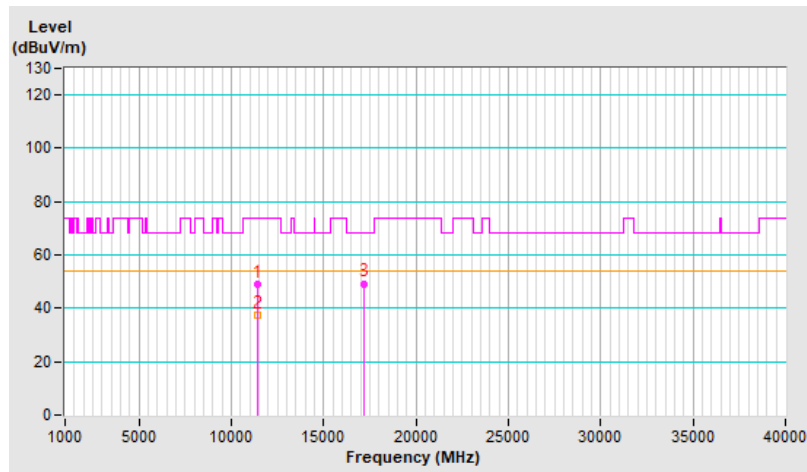


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.4 PK	74.0	-20.6	3.55 H	42	36.6	16.8
2	11490.00	42.1 AV	54.0	-11.9	3.55 H	42	25.3	16.8
3	#17235.00	53.1 PK	68.2	-15.1	1.43 H	170	32.8	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

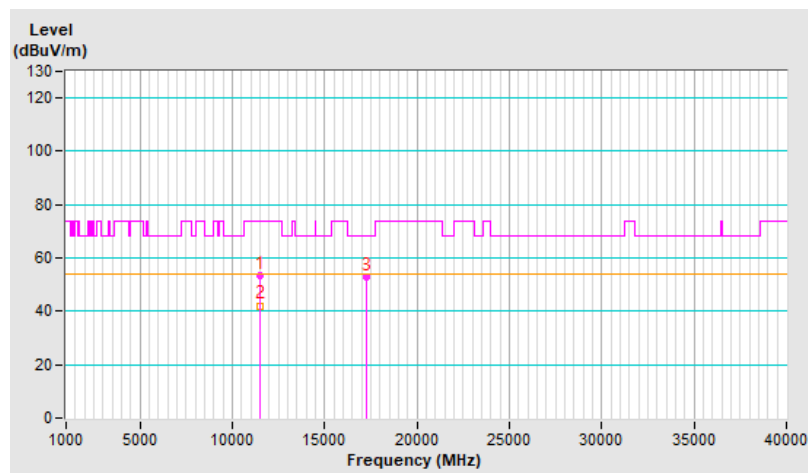


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.3 PK	74.0	-20.7	2.08 V	193	36.5	16.8
2	11490.00	41.5 AV	54.0	-12.5	2.08 V	193	24.7	16.8
3	#17235.00	52.9 PK	68.2	-15.3	1.53 V	56	32.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

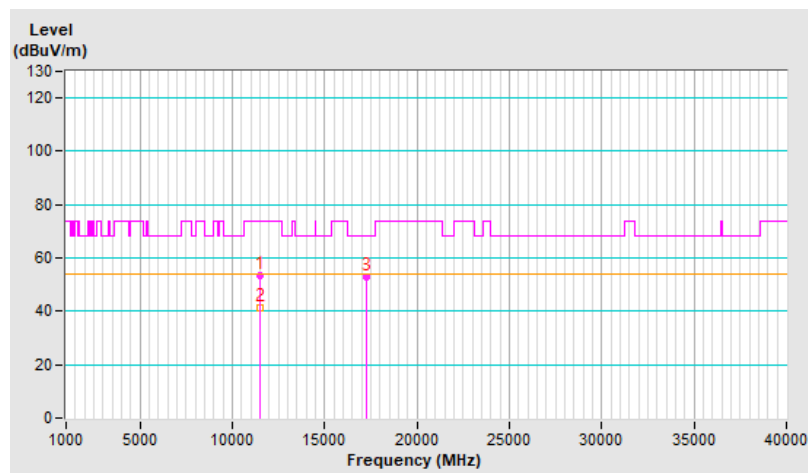


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.2 PK	74.0	-20.8	3.59 H	42	36.5	16.7
2	11650.00	41.5 AV	54.0	-12.5	3.59 H	42	24.8	16.7
3	#17475.00	52.6 PK	68.2	-15.6	1.38 H	170	30.3	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

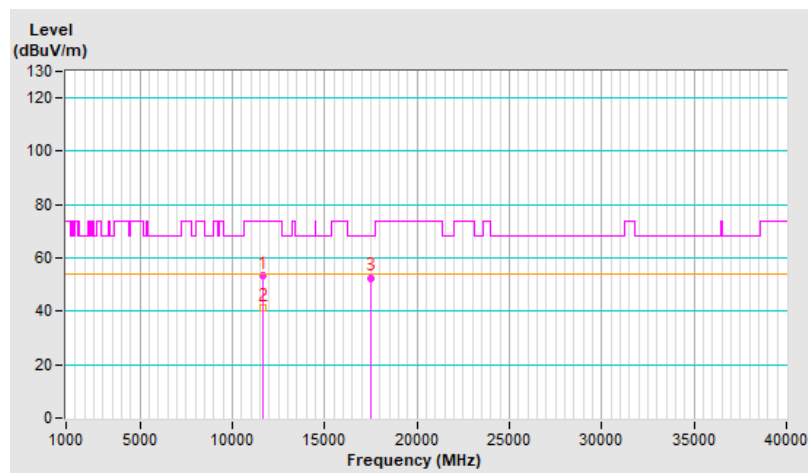


<b>RF Mode</b>	802.11ax (HE20) 52-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.0 PK	74.0	-21.0	2.12 V	191	36.3	16.7
2	11650.00	41.6 AV	54.0	-12.4	2.12 V	191	24.9	16.7
3	#17475.00	53.0 PK	68.2	-15.2	1.57 V	63	30.7	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

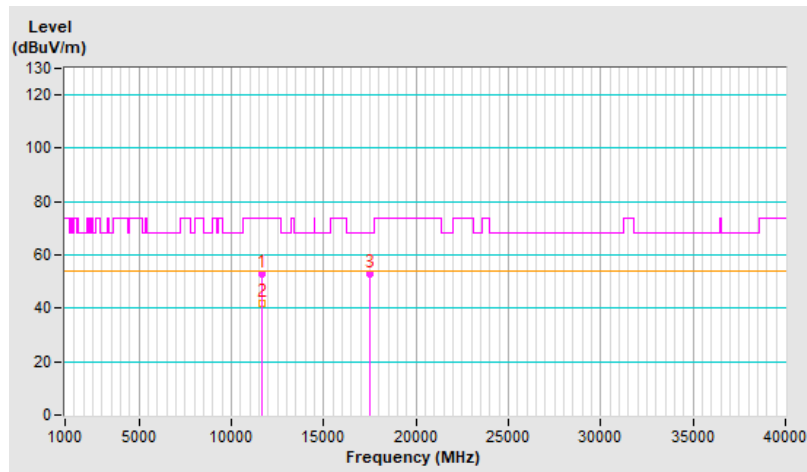




<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	3.47 H	78	32.9	15.9
2	15540.00	47.9 PK	74.0	-26.1	1.45 H	180	31.4	16.5
3	15540.00	38.5 AV	54.0	-15.5	1.45 H	180	22.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

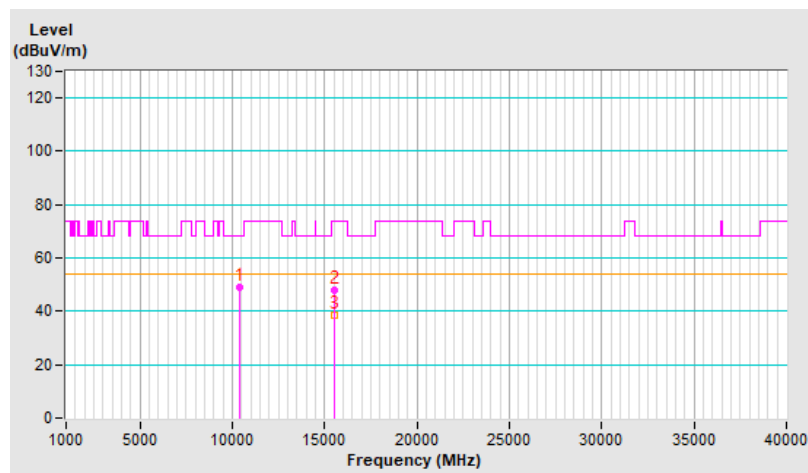


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	2.01 V	217	32.9	15.9
2	15540.00	48.5 PK	74.0	-25.5	1.61 V	50	32.0	16.5
3	15540.00	38.2 AV	54.0	-15.8	1.61 V	50	21.7	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

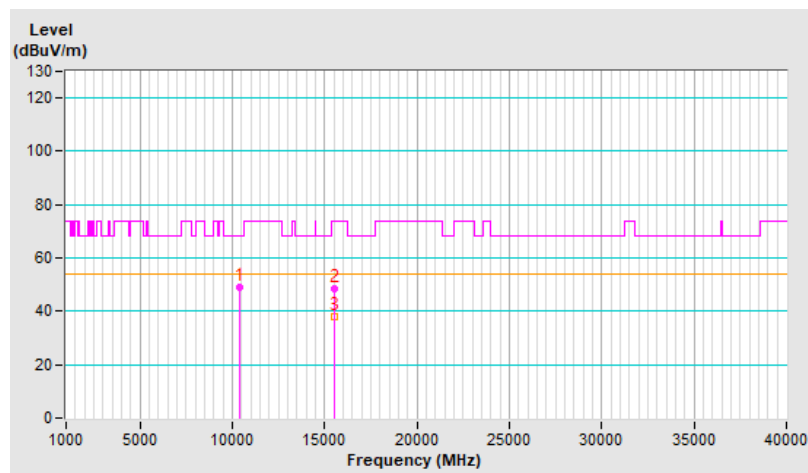


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.9 PK	74.0	-25.1	3.59 H	73	32.3	16.6
2	10640.00	37.8 AV	54.0	-16.2	3.59 H	73	21.2	16.6
3	15960.00	48.5 PK	74.0	-25.5	1.41 H	149	31.4	17.1
4	15960.00	38.1 AV	54.0	-15.9	1.41 H	149	21.0	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

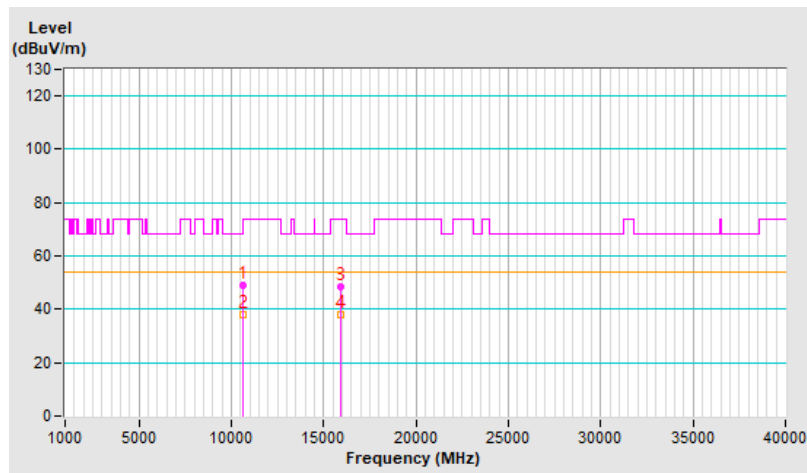


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.5 PK	74.0	-24.5	2.09 V	220	32.9	16.6
2	10640.00	37.9 AV	54.0	-16.1	2.09 V	220	21.3	16.6
3	15960.00	50.0 PK	74.0	-24.0	1.61 V	27	32.9	17.1
4	15960.00	38.5 AV	54.0	-15.5	1.61 V	27	21.4	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

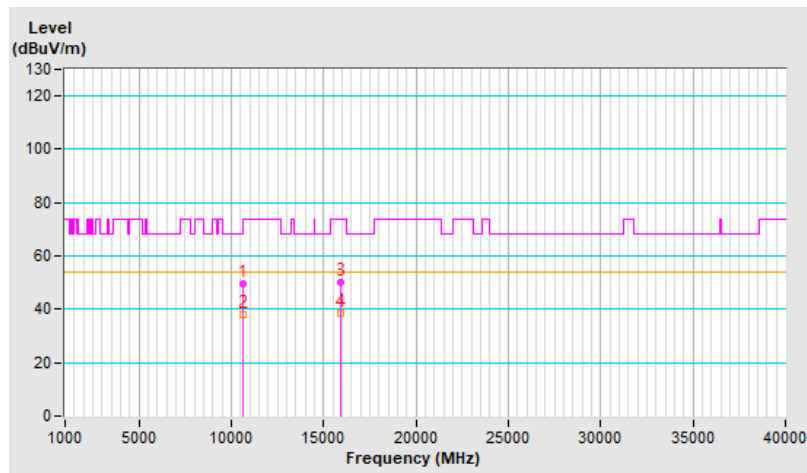


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.3 PK	74.0	-24.7	3.55 H	72	32.2	17.1
2	11000.00	37.4 AV	54.0	-16.6	3.55 H	72	20.3	17.1
3	#16500.00	49.3 PK	68.2	-18.9	1.39 H	176	29.8	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

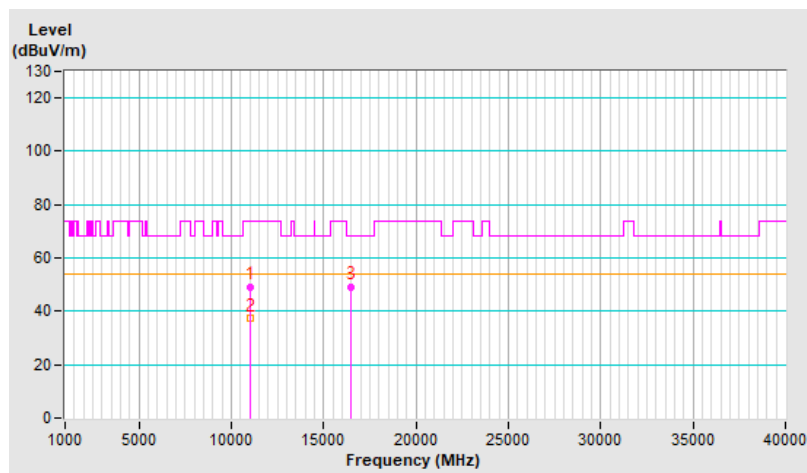




<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	2.12 V	209	32.3	17.1
2	11000.00	37.9 AV	54.0	-16.1	2.12 V	209	20.8	17.1
3	#16500.00	50.1 PK	68.2	-18.1	1.66 V	43	30.6	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

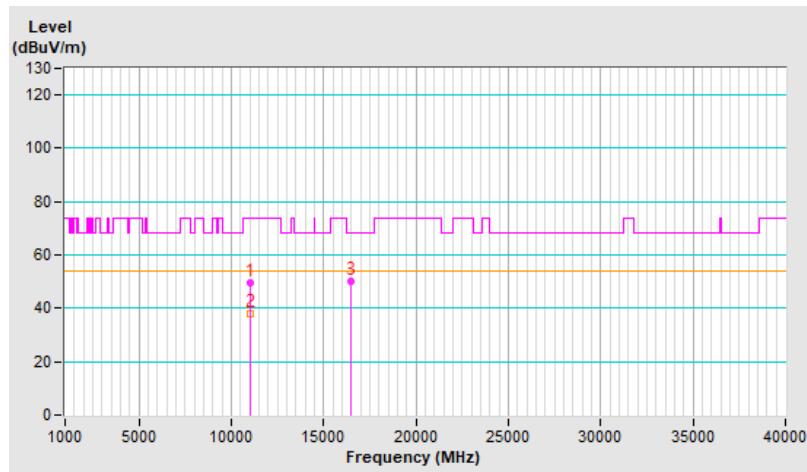


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.0 PK	74.0	-25.0	3.54 H	61	32.3	16.7
2	11400.00	37.8 AV	54.0	-16.2	3.54 H	61	21.1	16.7
3	#17100.00	49.5 PK	68.2	-18.7	1.42 H	199	29.1	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

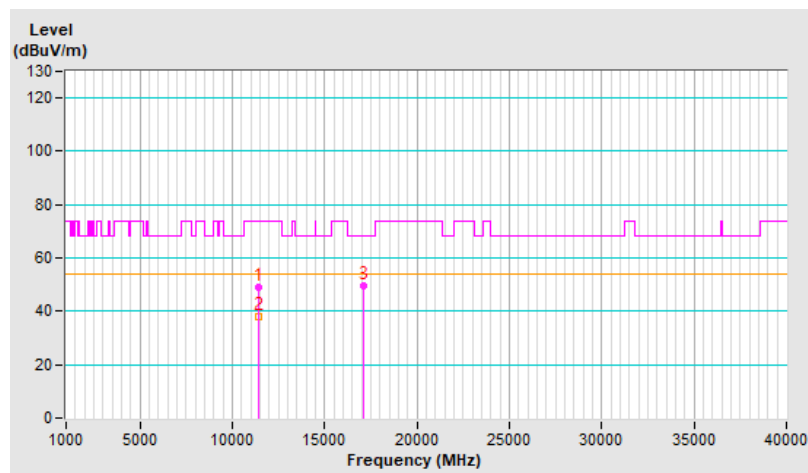


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	47.5 PK	74.0	-26.5	2.07 V	265	30.8	16.7
2	11400.00	36.2 AV	54.0	-17.8	2.07 V	265	19.5	16.7
3	#17100.00	50.5 PK	68.2	-17.7	1.54 V	117	30.1	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

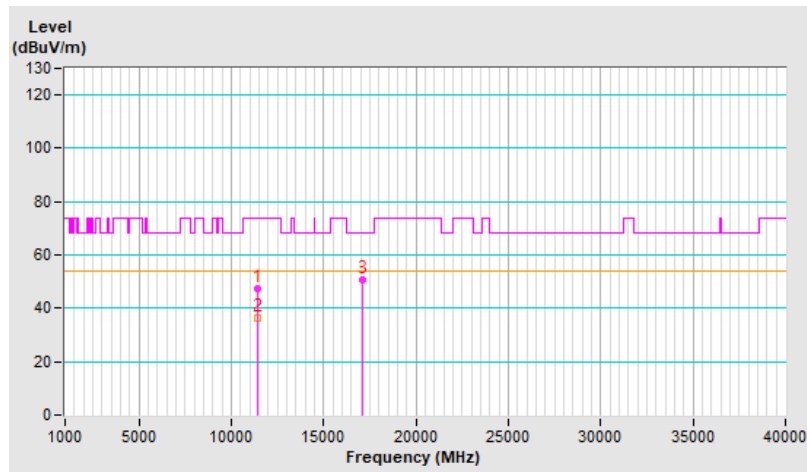




<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	3.50 H	49	32.1	16.7
2	11440.00	37.5 AV	54.0	-16.5	3.50 H	49	20.8	16.7
3	#17160.00	48.8 PK	68.2	-19.4	1.44 H	175	28.5	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

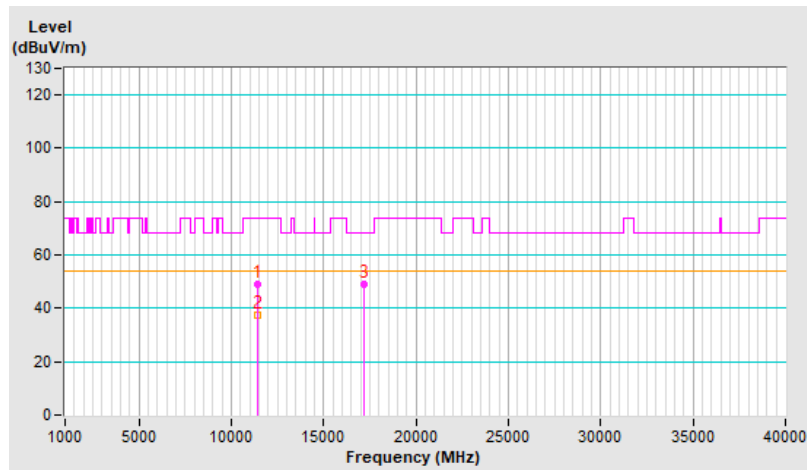


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.6 PK	74.0	-25.4	2.01 V	209	31.9	16.7
2	11440.00	37.6 AV	54.0	-16.4	2.01 V	209	20.9	16.7
3	#17160.00	48.7 PK	68.2	-19.5	1.61 V	51	28.4	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

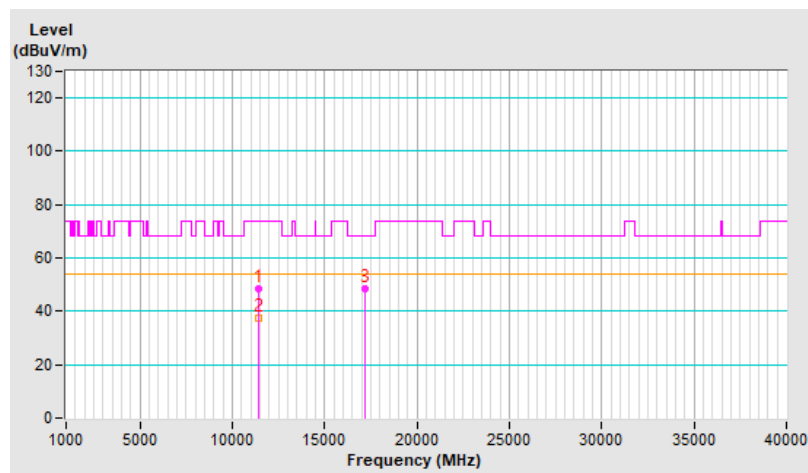


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.3 PK	74.0	-20.7	3.54 H	61	36.5	16.8
2	11490.00	41.1 AV	54.0	-12.9	3.54 H	61	24.3	16.8
3	#17235.00	53.3 PK	68.2	-14.9	1.44 H	132	33.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

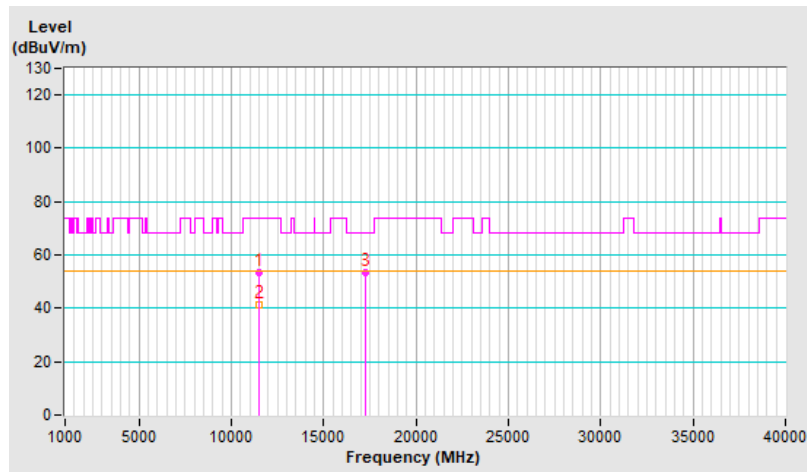


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.0 PK	74.0	-21.0	2.02 V	179	36.2	16.8
2	11490.00	42.5 AV	54.0	-11.5	2.02 V	179	25.7	16.8
3	#17235.00	53.5 PK	68.2	-14.7	1.60 V	12	33.2	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

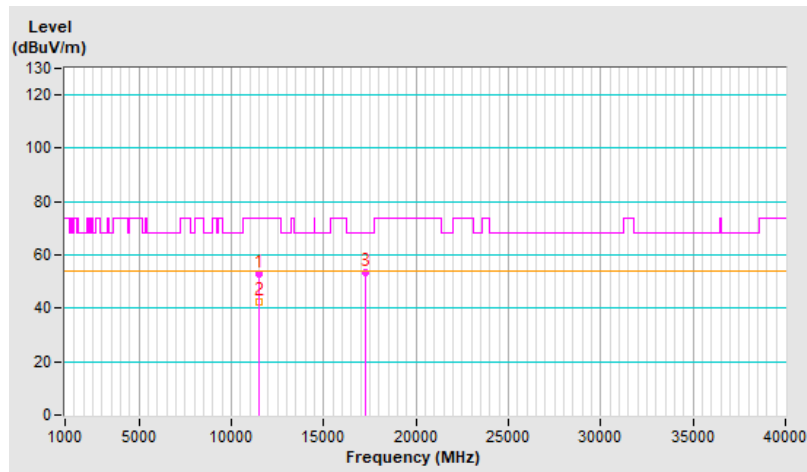


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.9 PK	74.0	-20.1	3.53 H	64	37.2	16.7
2	11650.00	41.2 AV	54.0	-12.8	3.53 H	64	24.5	16.7
3	#17475.00	53.4 PK	68.2	-14.8	1.49 H	146	31.1	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

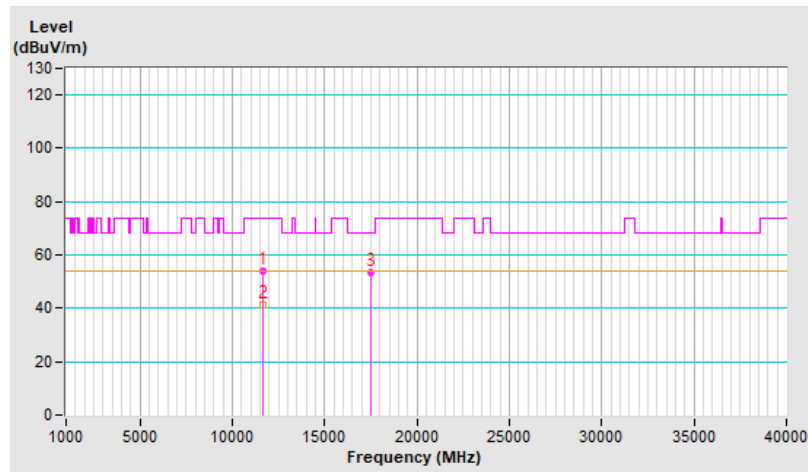


<b>RF Mode</b>	802.11ax (HE20) 106-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.3 PK	74.0	-20.7	2.05 V	170	36.6	16.7
2	11650.00	41.3 AV	54.0	-12.7	2.05 V	170	24.6	16.7
3	#17475.00	52.8 PK	68.2	-15.4	1.57 V	21	30.5	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

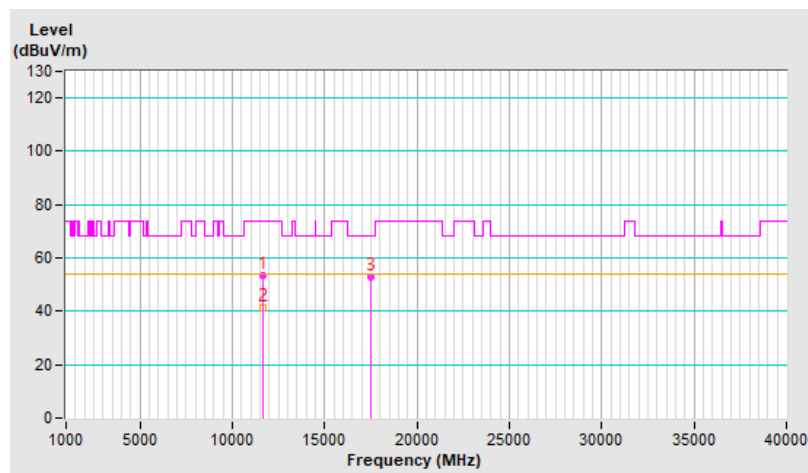


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.3 PK	68.2	-18.9	3.53 H	65	33.4	15.9
2	15540.00	48.5 PK	74.0	-25.5	1.45 H	162	32.0	16.5
3	15540.00	36.7 AV	54.0	-17.3	1.45 H	162	20.2	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

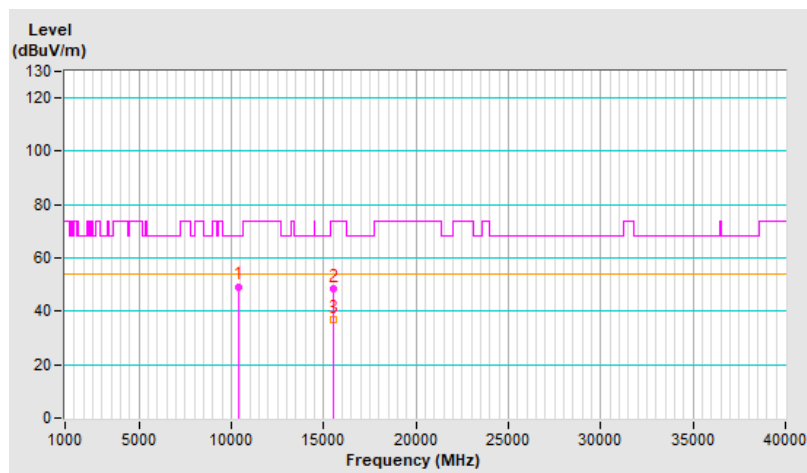


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.7 PK	68.2	-19.5	2.04 V	244	32.8	15.9
2	15540.00	49.4 PK	74.0	-24.6	1.55 V	37	32.9	16.5
3	15540.00	37.5 AV	54.0	-16.5	1.55 V	37	21.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

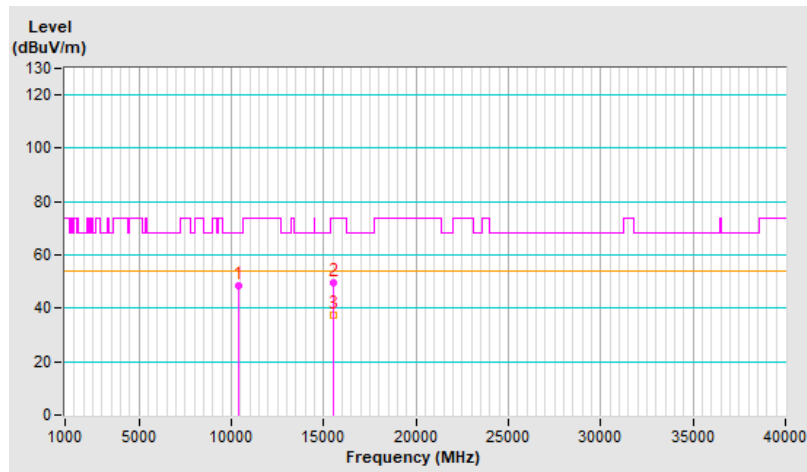




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.2 PK	74.0	-20.8	3.52 H	52	36.4	16.8
2	11490.00	42.9 AV	54.0	-11.1	3.52 H	52	26.1	16.8
3	#17235.00	52.8 PK	68.2	-15.4	1.40 H	169	32.5	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

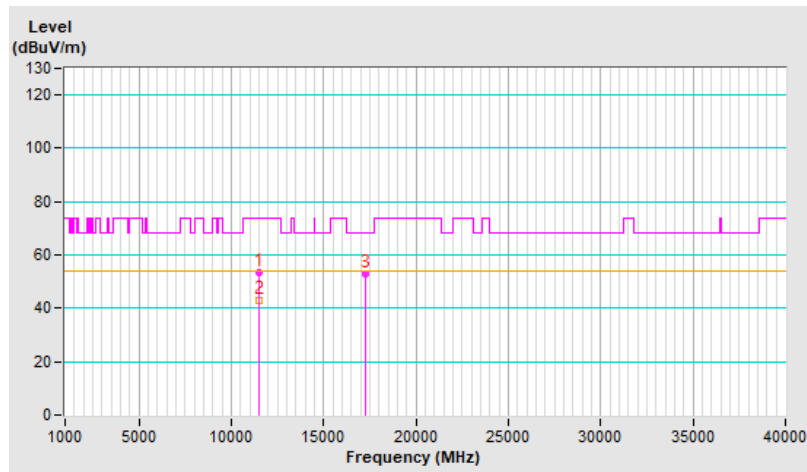


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.6 PK	74.0	-20.4	2.04 V	224	36.8	16.8
2	11490.00	41.5 AV	54.0	-12.5	2.04 V	224	24.7	16.8
3	#17235.00	53.1 PK	68.2	-15.1	1.66 V	41	32.8	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

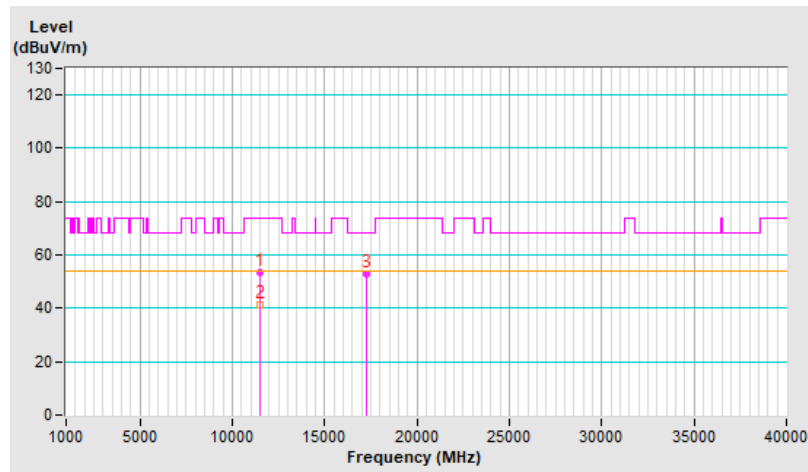




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.2 PK	74.0	-20.8	3.55 H	69	36.5	16.7
2	11650.00	42.6 AV	54.0	-11.4	3.55 H	69	25.9	16.7
3	#17475.00	53.4 PK	68.2	-14.8	1.53 H	150	31.1	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

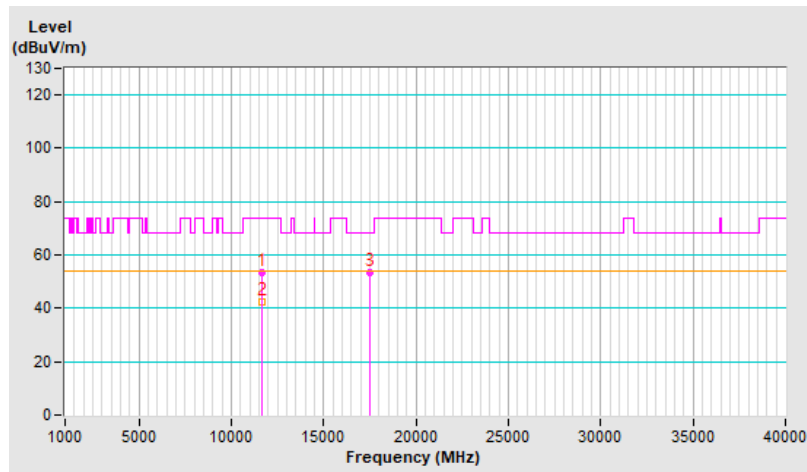


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.2 PK	74.0	-20.8	2.09 V	183	36.5	16.7
2	11650.00	42.5 AV	54.0	-11.5	2.09 V	183	25.8	16.7
3	#17475.00	52.4 PK	68.2	-15.8	1.54 V	38	30.1	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

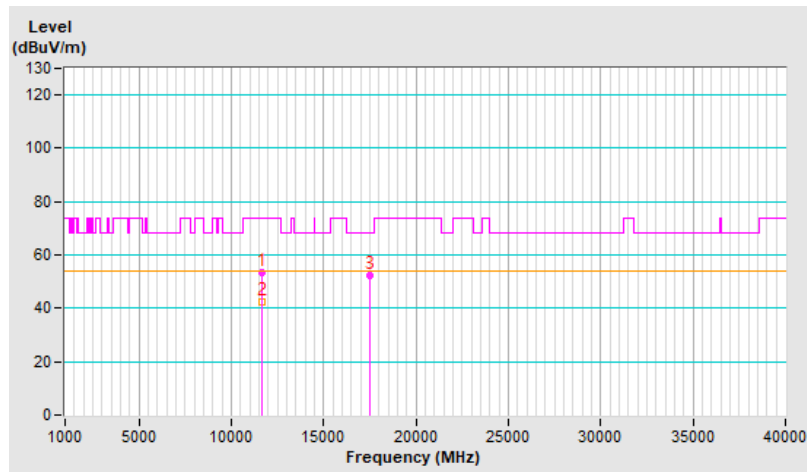


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.9 PK	68.2	-19.3	3.48 H	51	33.0	15.9
2	15540.00	48.5 PK	74.0	-25.5	1.40 H	165	32.0	16.5
3	15540.00	37.8 AV	54.0	-16.2	1.40 H	165	21.3	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

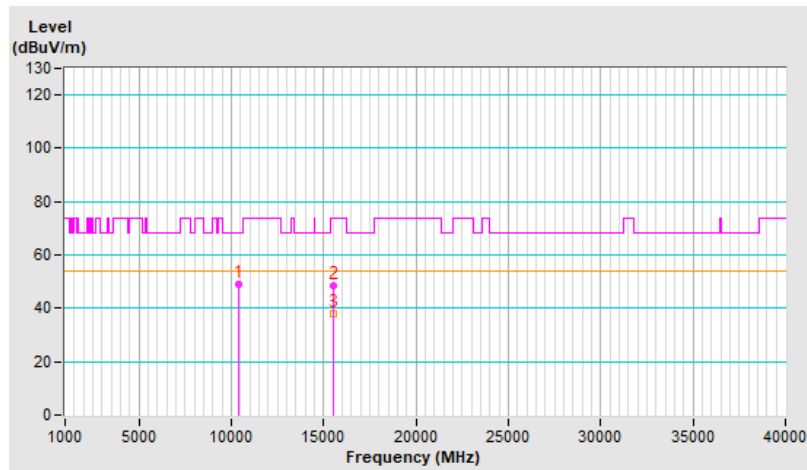


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.6 PK	68.2	-19.6	2.04 V	203	32.7	15.9
2	15540.00	48.3 PK	74.0	-25.7	1.60 V	39	31.8	16.5
3	15540.00	37.5 AV	54.0	-16.5	1.60 V	39	21.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

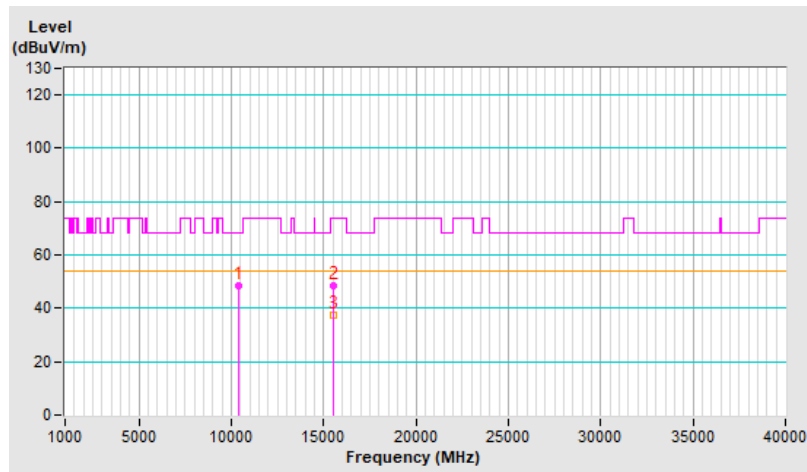


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.6 PK	74.0	-20.4	3.53 H	73	36.8	16.8
2	11490.00	41.0 AV	54.0	-13.0	3.53 H	73	24.2	16.8
3	#17235.00	52.4 PK	68.2	-15.8	1.33 H	194	32.1	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

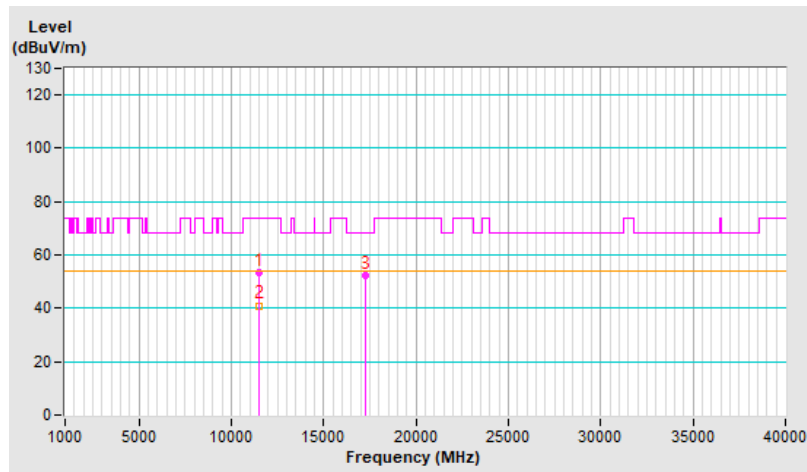


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.0 PK	74.0	-21.0	2.07 V	198	36.2	16.8
2	11490.00	41.8 AV	54.0	-12.2	2.07 V	198	25.0	16.8
3	#17235.00	53.5 PK	68.2	-14.7	1.57 V	65	33.2	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

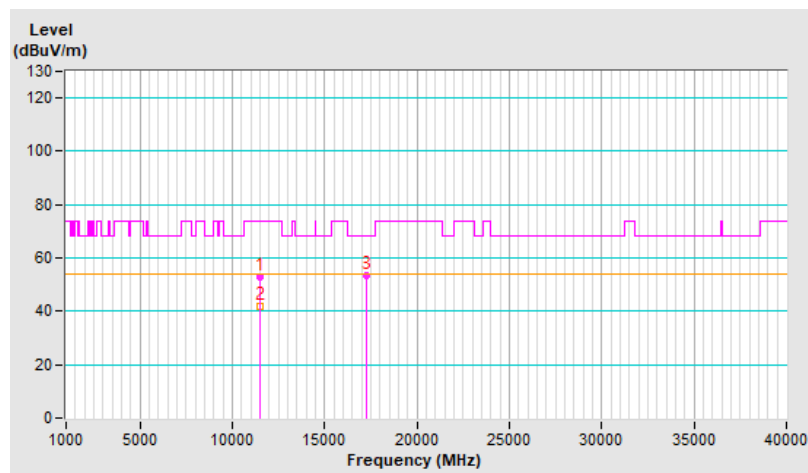




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.6 PK	74.0	-20.4	3.52 H	70	36.9	16.7
2	11650.00	41.2 AV	54.0	-12.8	3.52 H	70	24.5	16.7
3	#17475.00	52.7 PK	68.2	-15.5	1.37 H	182	30.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

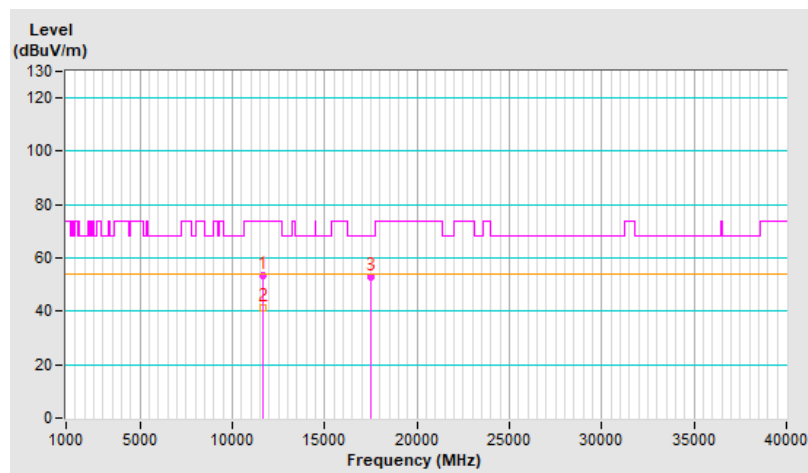


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.2 PK	74.0	-20.8	2.09 V	193	36.5	16.7
2	11650.00	41.3 AV	54.0	-12.7	2.09 V	193	24.6	16.7
3	#17475.00	52.9 PK	68.2	-15.3	1.58 V	51	30.6	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

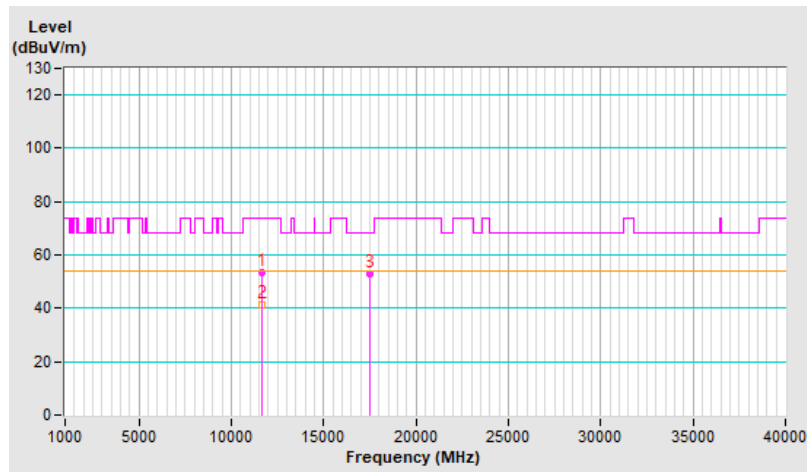


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.1 PK	68.2	-20.1	3.56 H	67	32.2	15.9
2	15540.00	48.5 PK	74.0	-25.5	1.47 H	167	32.0	16.5
3	15540.00	37.5 AV	54.0	-16.5	1.47 H	167	21.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

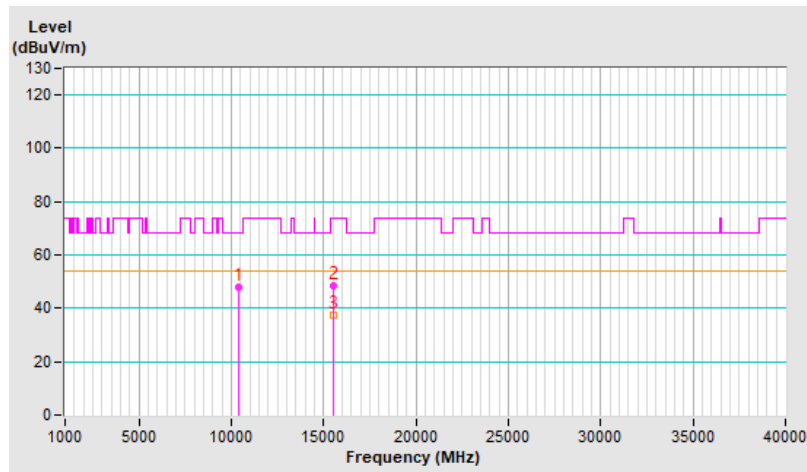


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.7 PK	68.2	-19.5	2.08 V	205	32.8	15.9
2	15540.00	49.3 PK	74.0	-24.7	1.57 V	28	32.8	16.5
3	15540.00	37.0 AV	54.0	-17.0	1.57 V	28	20.5	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

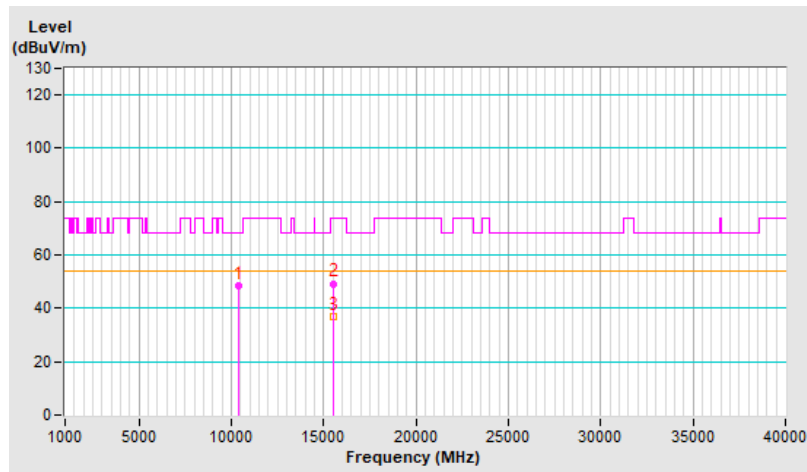


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.5 PK	74.0	-20.5	3.63 H	77	36.7	16.8
2	11490.00	42.7 AV	54.0	-11.3	3.63 H	77	25.9	16.8
3	#17235.00	52.9 PK	68.2	-15.3	1.40 H	187	32.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

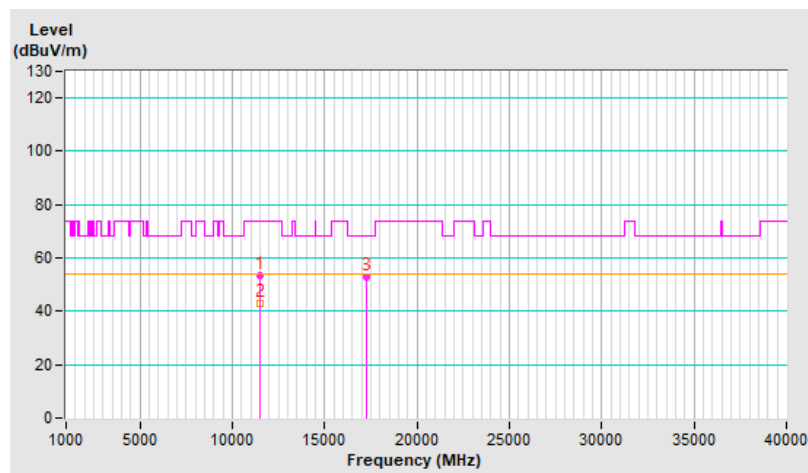


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.4 PK	74.0	-20.6	2.05 V	182	36.6	16.8
2	11490.00	42.1 AV	54.0	-11.9	2.05 V	182	25.3	16.8
3	#17235.00	52.5 PK	68.2	-15.7	1.54 V	67	32.2	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

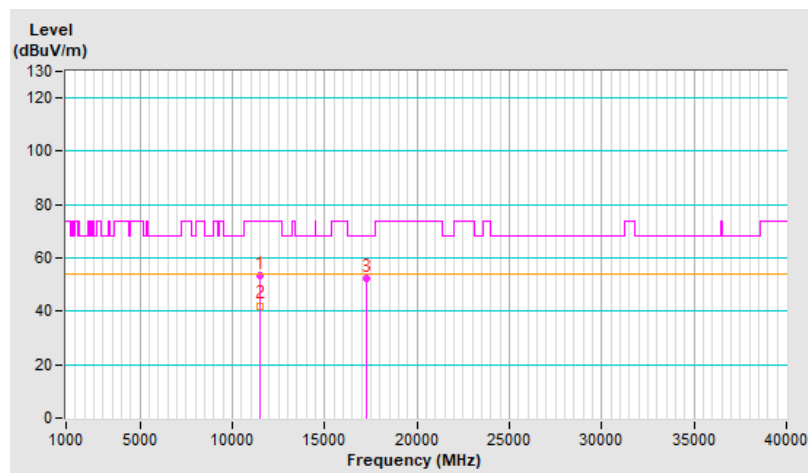


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.7 PK	74.0	-21.3	3.64 H	73	36.0	16.7
2	11650.00	42.3 AV	54.0	-11.7	3.64 H	73	25.6	16.7
3	#17475.00	52.2 PK	68.2	-16.0	1.35 H	175	29.9	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

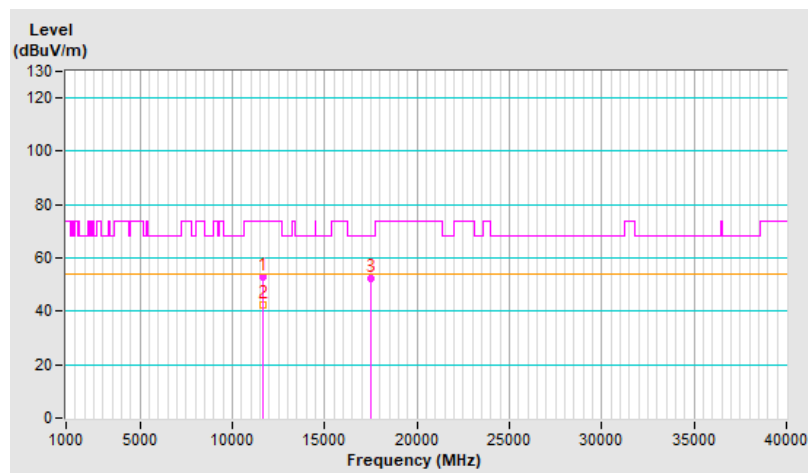


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	52.9 PK	74.0	-21.1	2.01 V	217	36.2	16.7
2	11650.00	42.8 AV	54.0	-11.2	2.01 V	217	26.1	16.7
3	#17475.00	53.5 PK	68.2	-14.7	1.57 V	129	31.2	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

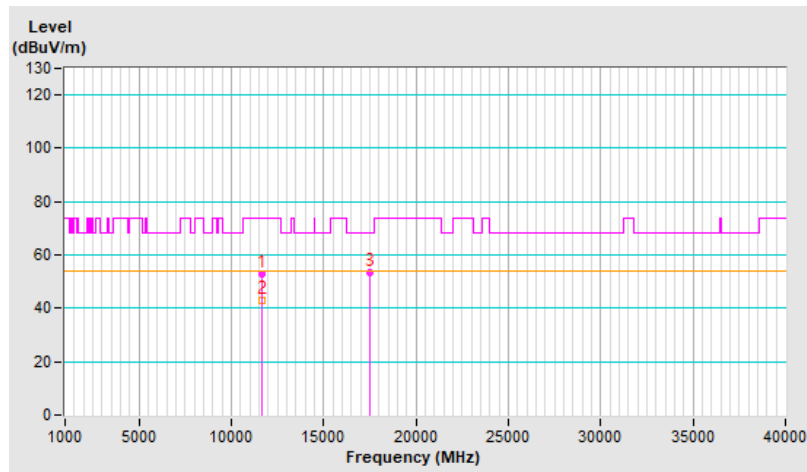




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.3 PK	68.2	-19.9	3.52 H	64	32.4	15.9
2	15540.00	48.1 PK	74.0	-25.9	1.44 H	169	31.6	16.5
3	15540.00	36.1 AV	54.0	-17.9	1.44 H	169	19.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

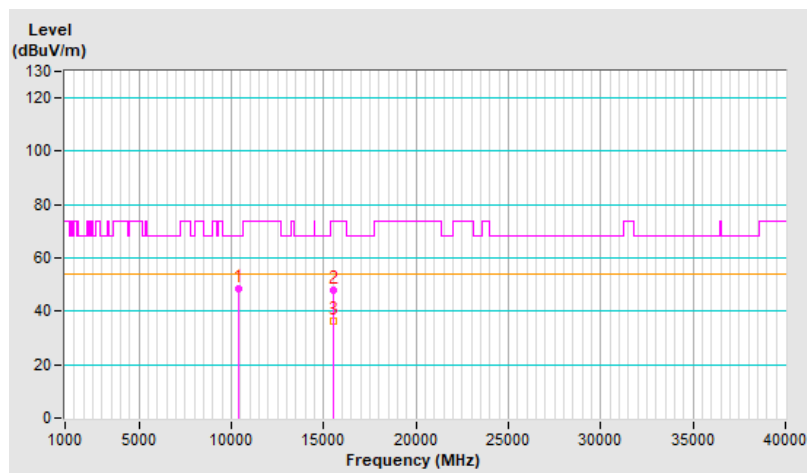


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.9 PK	68.2	-19.3	2.02 V	222	33.0	15.9
2	15540.00	49.3 PK	74.0	-24.7	1.60 V	38	32.8	16.5
3	15540.00	36.8 AV	54.0	-17.2	1.60 V	38	20.3	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

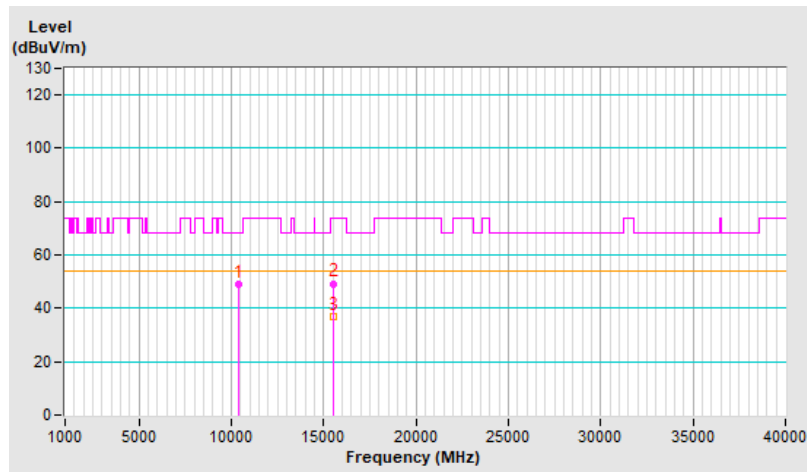


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.0 PK	74.0	-21.0	3.52 H	67	36.2	16.8
2	11490.00	42.1 AV	54.0	-11.9	3.52 H	67	25.3	16.8
3	#17235.00	53.0 PK	68.2	-15.2	1.34 H	181	32.7	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

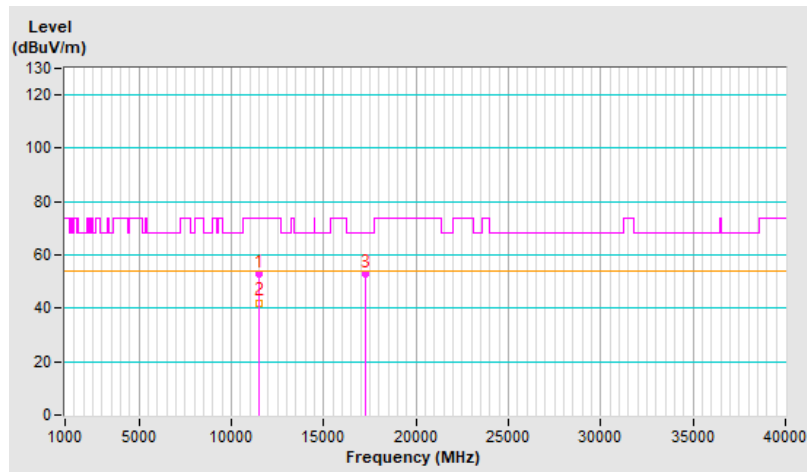


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.3 PK	74.0	-20.7	2.09 V	184	36.5	16.8
2	11490.00	42.5 AV	54.0	-11.5	2.09 V	184	25.7	16.8
3	#17235.00	52.7 PK	68.2	-15.5	1.59 V	64	32.4	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

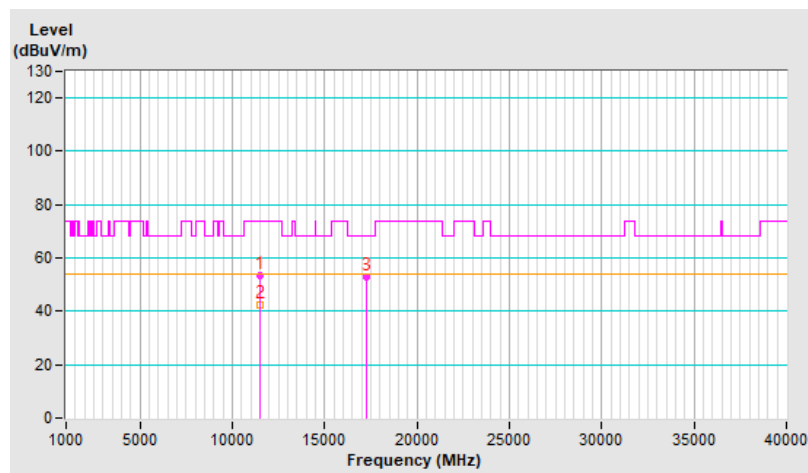


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.3 PK	74.0	-20.7	3.57 H	57	36.6	16.7
2	11650.00	41.5 AV	54.0	-12.5	3.57 H	57	24.8	16.7
3	#17475.00	53.1 PK	68.2	-15.1	1.39 H	184	30.8	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

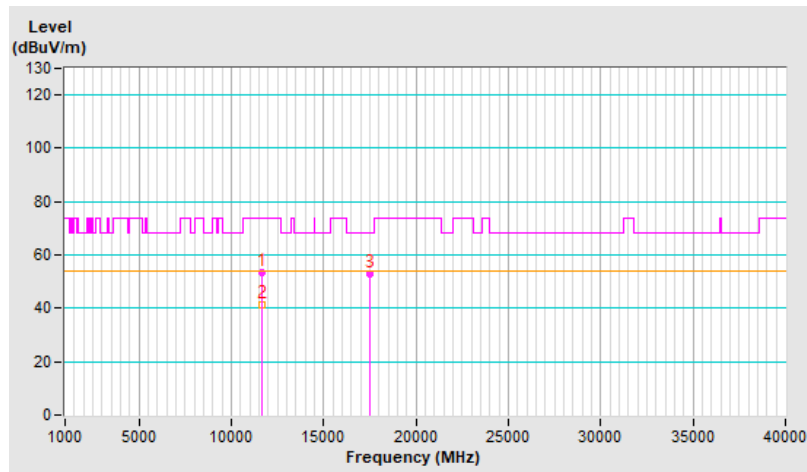


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.8 PK	74.0	-20.2	2.09 V	193	37.1	16.7
2	11650.00	41.7 AV	54.0	-12.3	2.09 V	193	25.0	16.7
3	#17475.00	52.7 PK	68.2	-15.5	1.58 V	51	30.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

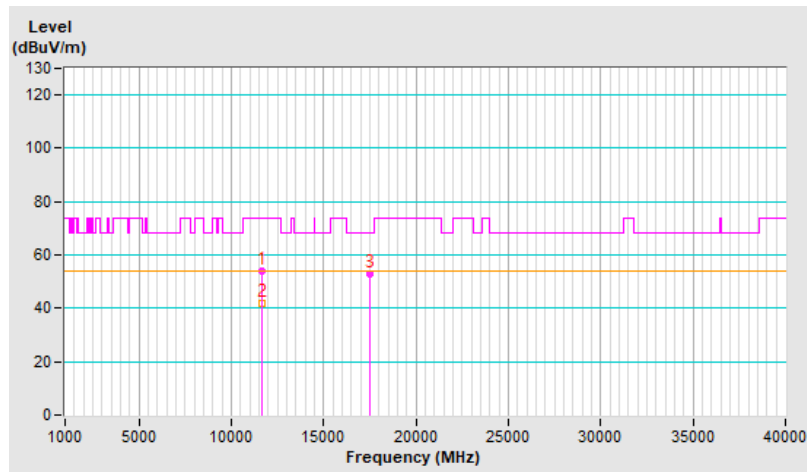


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	47.8 PK	68.2	-20.4	3.49 H	74	31.9	15.9
2	15540.00	48.1 PK	74.0	-25.9	1.54 H	186	31.6	16.5
3	15540.00	36.0 AV	54.0	-18.0	1.54 H	186	19.5	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

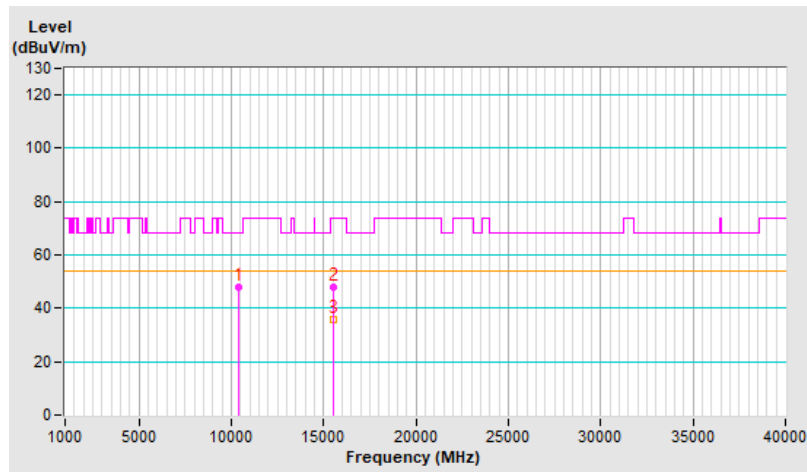


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.6 PK	68.2	-19.6	2.10 V	206	32.7	15.9
2	15540.00	49.3 PK	74.0	-24.7	1.58 V	33	32.8	16.5
3	15540.00	36.9 AV	54.0	-17.1	1.58 V	33	20.4	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

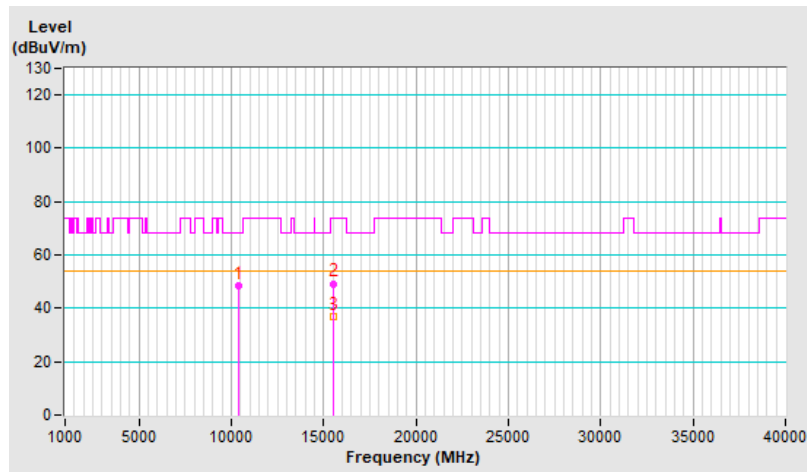




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.6 PK	74.0	-20.4	3.60 H	46	36.8	16.8
2	11490.00	42.2 AV	54.0	-11.8	3.60 H	46	25.4	16.8
3	#17235.00	53.2 PK	68.2	-15.0	1.48 H	159	32.9	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

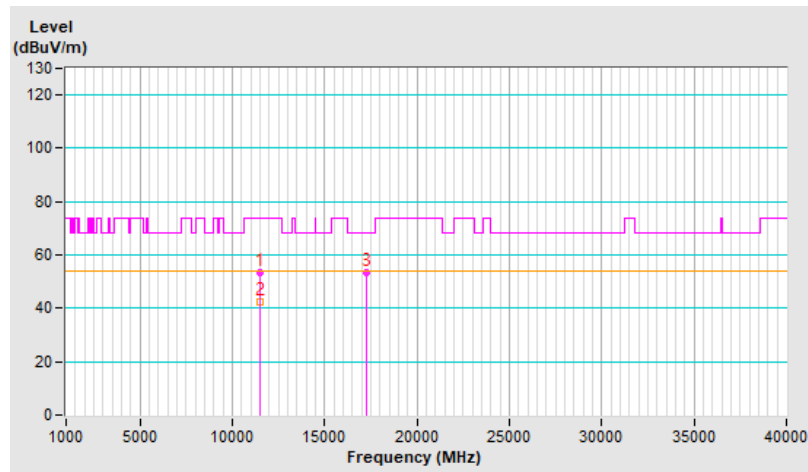


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	53.7 PK	74.0	-20.3	2.08 V	193	36.9	16.8
2	11490.00	41.5 AV	54.0	-12.5	2.08 V	193	24.7	16.8
3	#17235.00	53.3 PK	68.2	-14.9	1.57 V	56	33.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

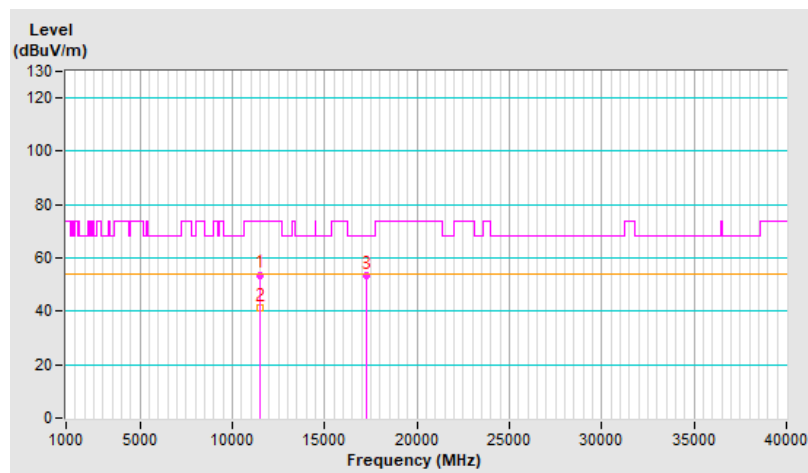




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.9 PK	74.0	-20.1	3.58 H	49	37.2	16.7
2	11650.00	42.5 AV	54.0	-11.5	3.58 H	49	25.8	16.7
3	#17475.00	52.7 PK	68.2	-15.5	1.42 H	157	30.4	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

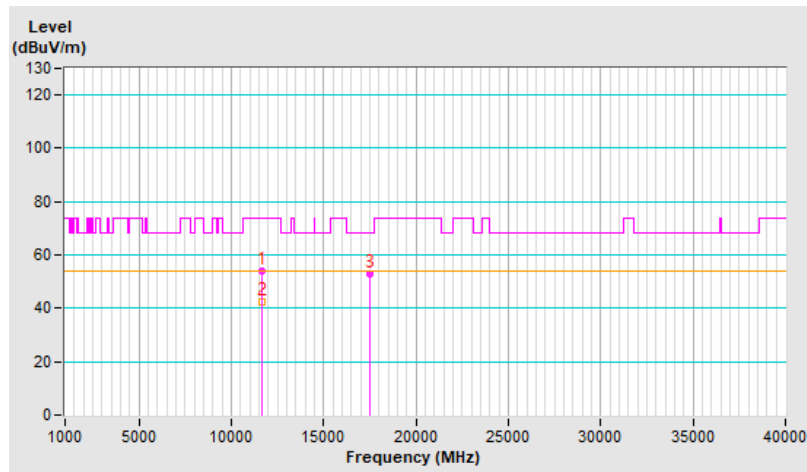


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	53.3 PK	74.0	-20.7	2.09 V	193	36.6	16.7
2	11650.00	41.8 AV	54.0	-12.2	2.09 V	193	25.1	16.7
3	#17475.00	53.0 PK	68.2	-15.2	1.58 V	51	30.7	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

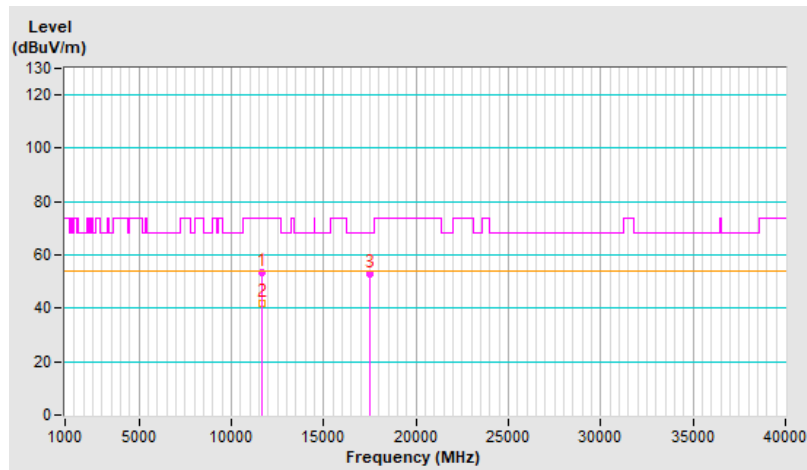


<b>RF Mode</b>	802.11be (EHT80) 484+242-tone MRU	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.9 PK	68.2	-19.3	3.48 H	51	32.7	16.2
2	15630.00	48.5 PK	74.0	-25.5	1.40 H	165	31.8	16.7
3	15630.00	36.2 AV	54.0	-17.8	1.40 H	165	19.5	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

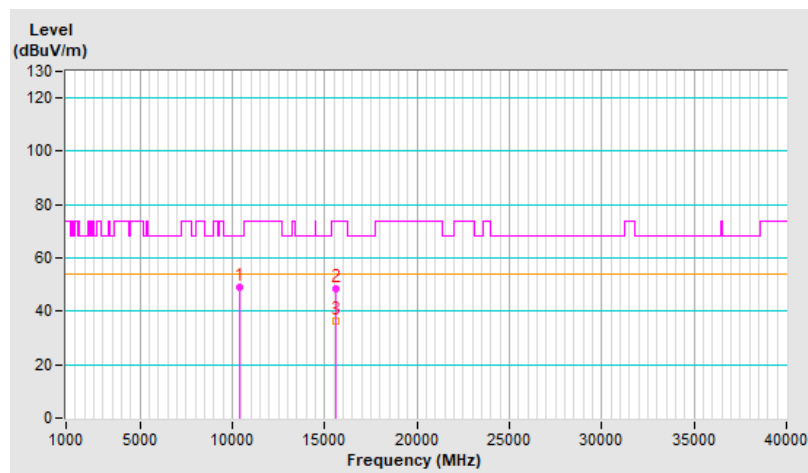


<b>RF Mode</b>	802.11be (EHT80) 484+242-tone MRU	<b>Channel</b>	CH 42 : 5210 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	48.8 PK	68.2	-19.4	2.06 V	223	32.6	16.2
2	15630.00	48.3 PK	74.0	-25.7	1.58 V	42	31.6	16.7
3	15630.00	36.2 AV	54.0	-17.8	1.58 V	42	19.5	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

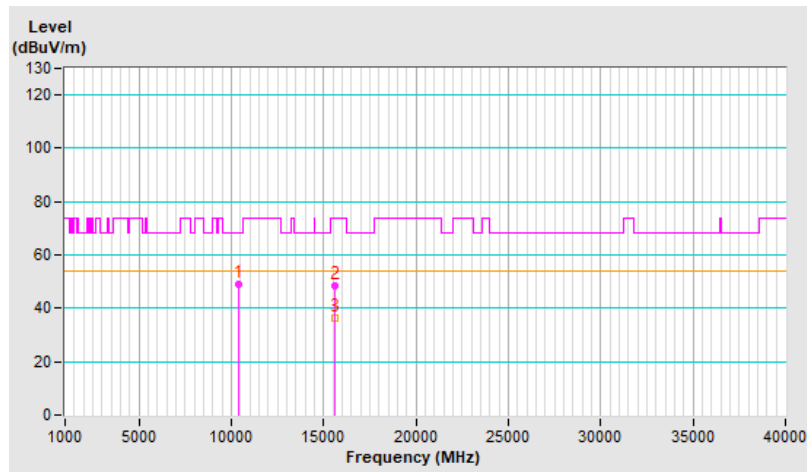


<b>RF Mode</b>	802.11be (EHT80) 484+242-tone MRU	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	52.9 PK	74.0	-21.1	3.51 H	61	36.1	16.8
2	11550.00	42.7 AV	54.0	-11.3	3.51 H	61	25.9	16.8
3	#17325.00	52.2 PK	68.2	-16.0	1.39 H	199	31.3	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

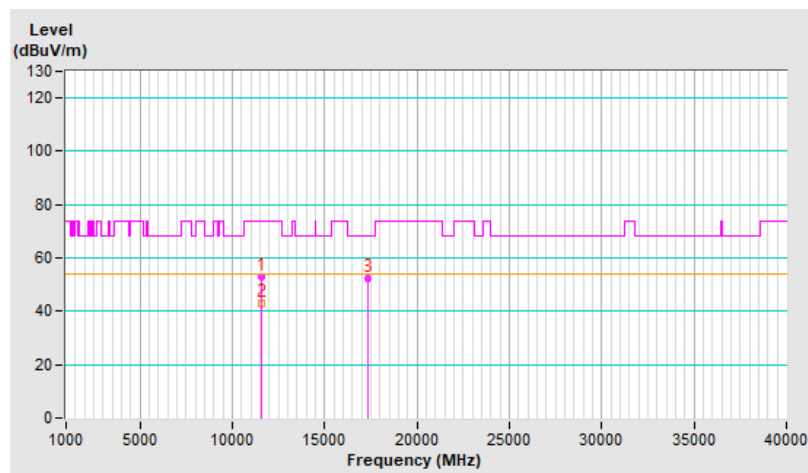


<b>RF Mode</b>	802.11be (EHT80) 484+242-tone MRU	<b>Channel</b>	CH 155 : 5775 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	53.5 PK	74.0	-20.5	1.99 V	204	36.7	16.8
2	11550.00	43.4 AV	54.0	-10.6	1.99 V	204	26.6	16.8
3	#17325.00	53.0 PK	68.2	-15.2	1.59 V	32	32.1	20.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

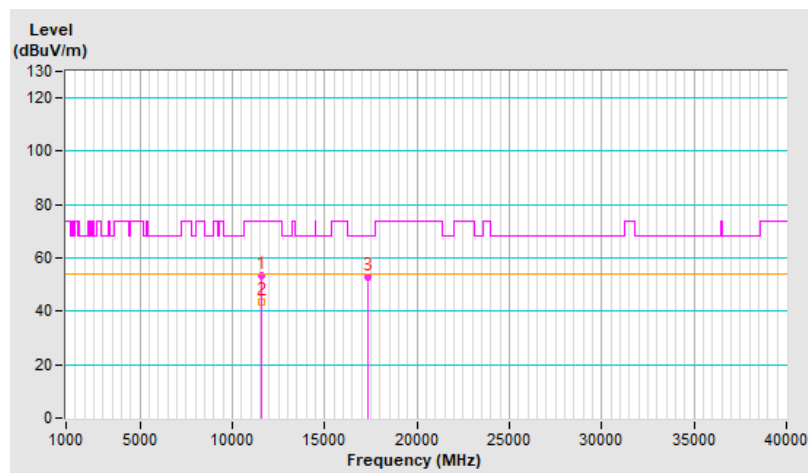




**For 2TX**

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.8 PK	68.2	-19.4	3.50 H	51	32.9	15.9
2	15540.00	48.4 PK	74.0	-25.6	1.38 H	161	31.9	16.5
3	15540.00	36.2 AV	54.0	-17.8	1.38 H	161	19.7	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

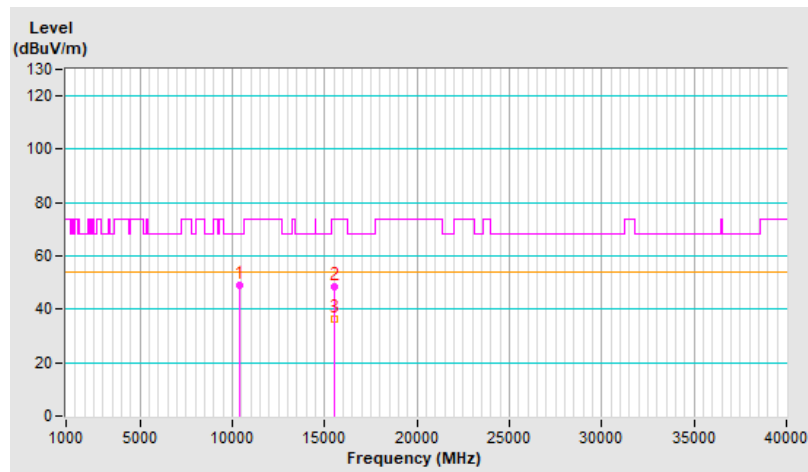


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	48.6 PK	68.2	-19.6	2.15 V	198	32.7	15.9
2	15540.00	48.9 PK	74.0	-25.1	1.56 V	67	32.4	16.5
3	15540.00	36.4 AV	54.0	-17.6	1.56 V	67	19.9	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

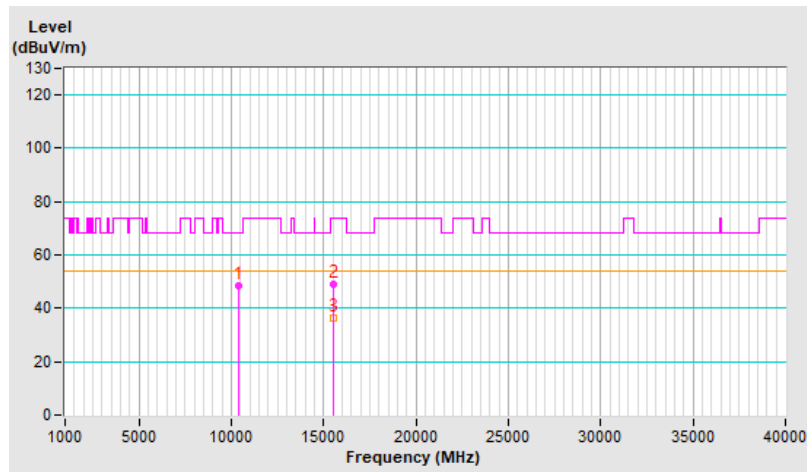


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.0 PK	68.2	-19.2	3.52 H	43	32.9	16.1
2	15600.00	48.4 PK	74.0	-25.6	1.42 H	160	31.8	16.6
3	15600.00	36.0 AV	54.0	-18.0	1.42 H	160	19.4	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

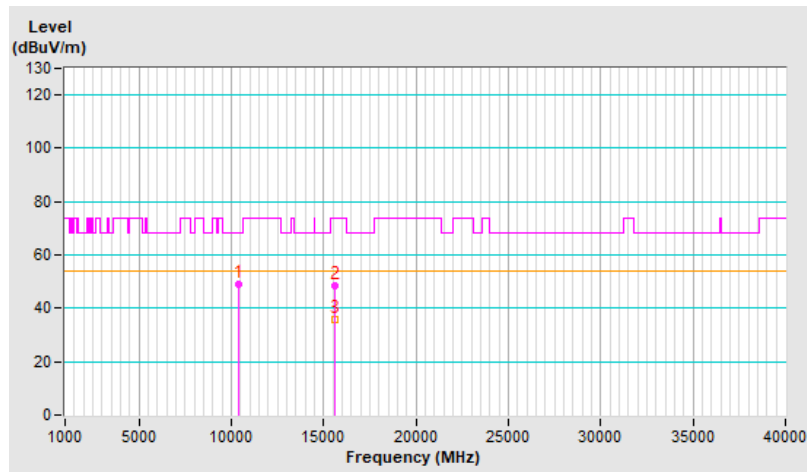


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	48.6 PK	68.2	-19.6	2.20 V	186	32.5	16.1
2	15600.00	48.4 PK	74.0	-25.6	1.62 V	60	31.8	16.6
3	15600.00	36.2 AV	54.0	-17.8	1.62 V	60	19.6	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

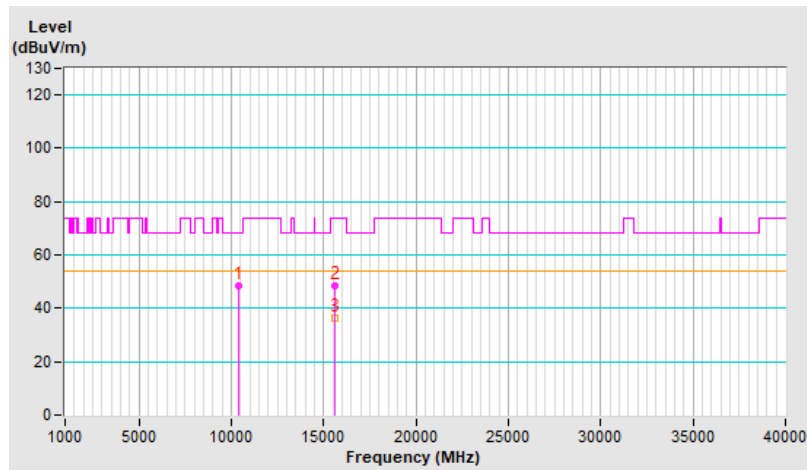


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.3 PK	68.2	-19.9	3.55 H	64	32.3	16.0
2	15720.00	48.5 PK	74.0	-25.5	1.36 H	148	31.7	16.8
3	15720.00	36.4 AV	54.0	-17.6	1.36 H	148	19.6	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

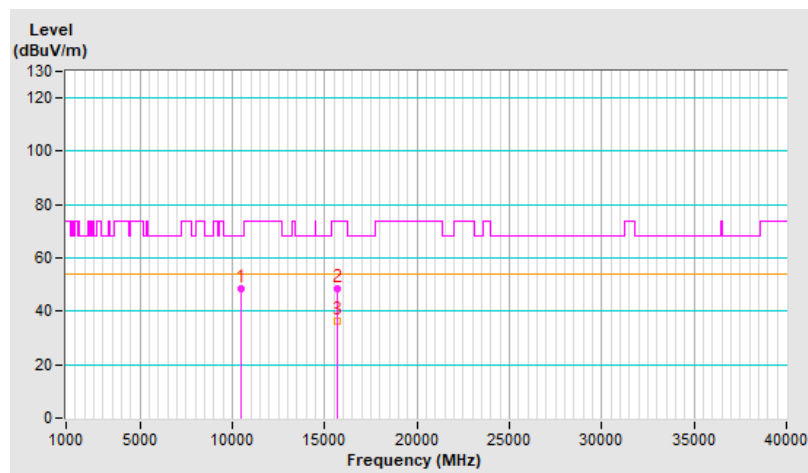


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	48.9 PK	68.2	-19.3	1.96 V	206	32.9	16.0
2	15720.00	48.9 PK	74.0	-25.1	1.57 V	22	32.1	16.8
3	15720.00	36.8 AV	54.0	-17.2	1.57 V	22	20.0	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

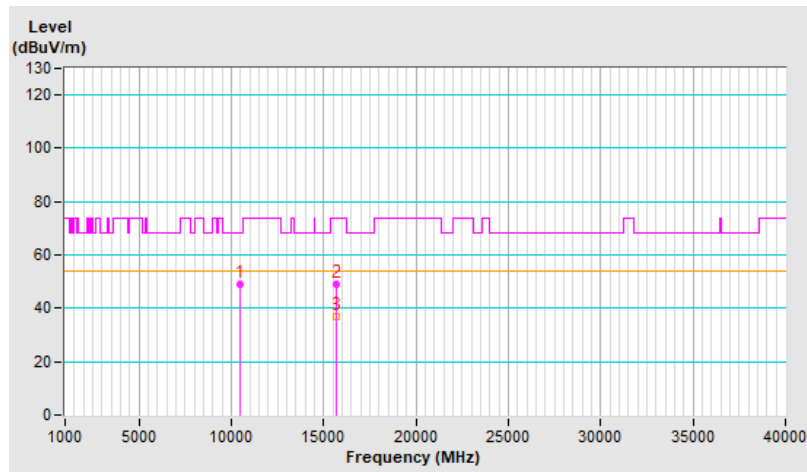


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.9 PK	68.2	-19.3	3.60 H	80	32.8	16.1
2	15780.00	48.4 PK	74.0	-25.6	1.45 H	197	31.6	16.8
3	15780.00	36.2 AV	54.0	-17.8	1.45 H	197	19.4	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

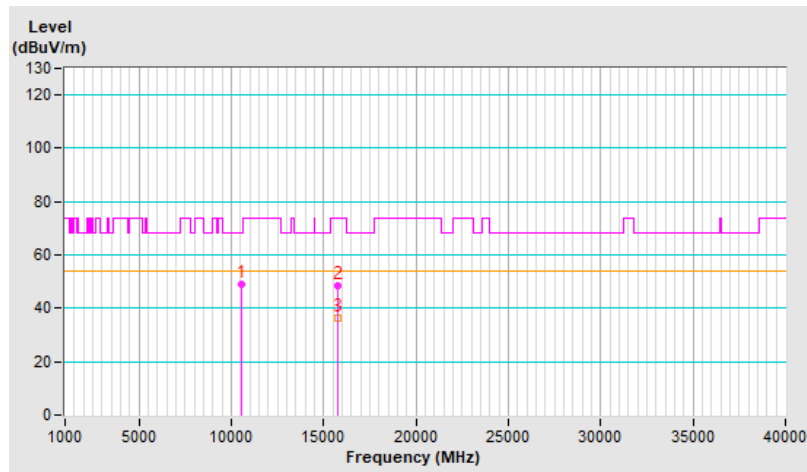


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	49.3 PK	68.2	-18.9	2.18 V	185	33.2	16.1
2	15780.00	49.4 PK	74.0	-24.6	1.68 V	27	32.6	16.8
3	15780.00	37.4 AV	54.0	-16.6	1.68 V	27	20.6	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

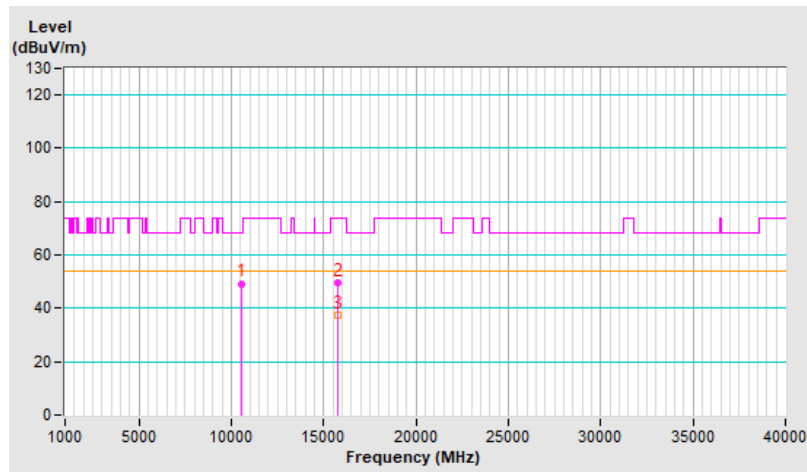




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.9 PK	74.0	-25.1	3.54 H	33	32.4	16.5
2	10600.00	37.5 AV	54.0	-16.5	3.54 H	33	21.0	16.5
3	15900.00	48.3 PK	74.0	-25.7	1.32 H	150	31.2	17.1
4	15900.00	38.6 AV	54.0	-15.4	1.32 H	150	21.5	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

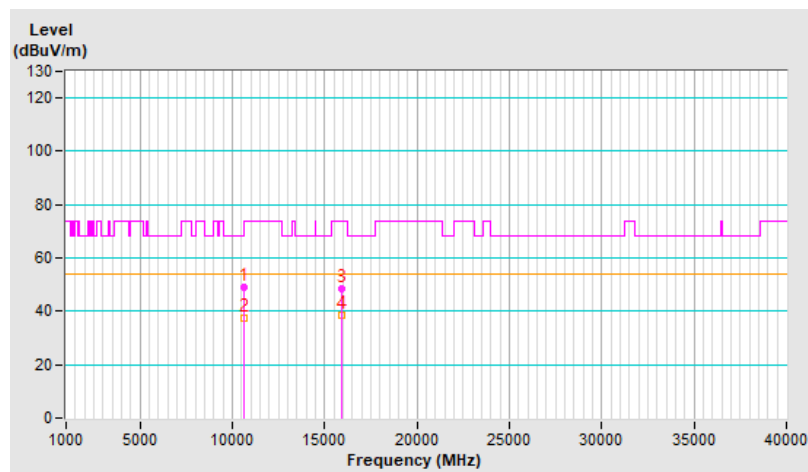


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	10600.00	49.0 PK	74.0	-25.0	2.12 V	192	32.5	16.5
2	10600.00	37.3 AV	54.0	-16.7	2.12 V	192	20.8	16.5
3	15900.00	49.9 PK	74.0	-24.1	1.65 V	38	32.8	17.1
4	15900.00	38.5 AV	54.0	-15.5	1.65 V	38	21.4	17.1

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

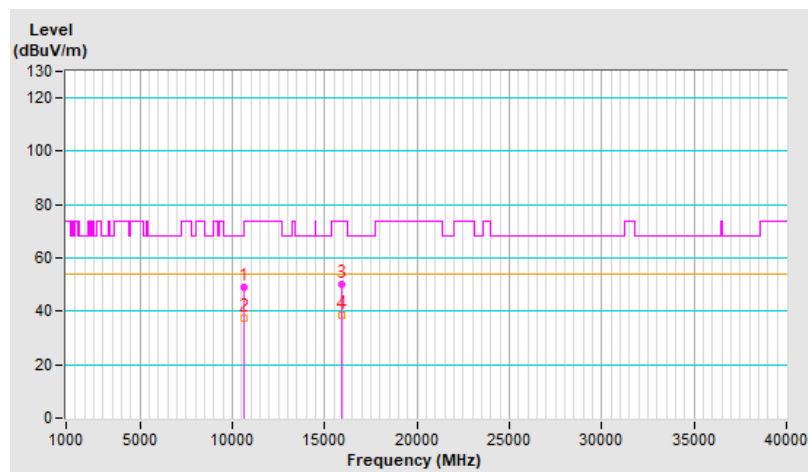


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.9 PK	74.0	-25.1	3.38 H	52	32.3	16.6
2	10640.00	37.2 AV	54.0	-16.8	3.38 H	52	20.6	16.6
3	15960.00	49.4 PK	74.0	-24.6	1.41 H	145	32.3	17.1
4	15960.00	38.4 AV	54.0	-15.6	1.41 H	145	21.3	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

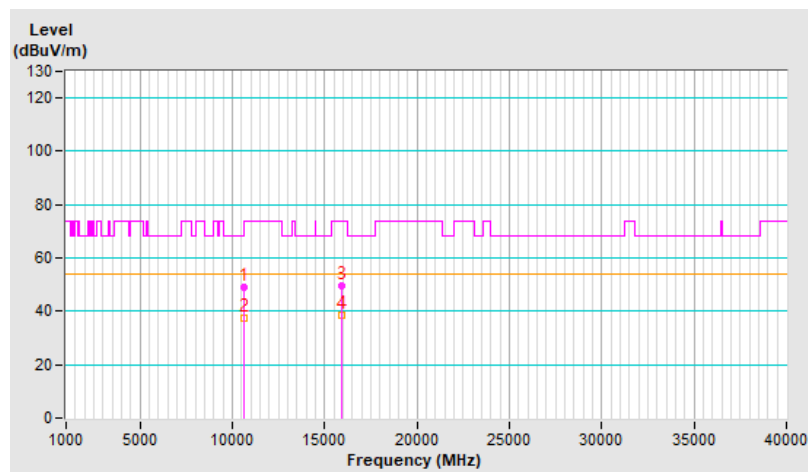


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.1 PK	74.0	-24.9	2.17 V	188	32.5	16.6
2	10640.00	37.3 AV	54.0	-16.7	2.17 V	188	20.7	16.6
3	15960.00	49.3 PK	74.0	-24.7	1.65 V	13	32.2	17.1
4	15960.00	38.6 AV	54.0	-15.4	1.65 V	13	21.5	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

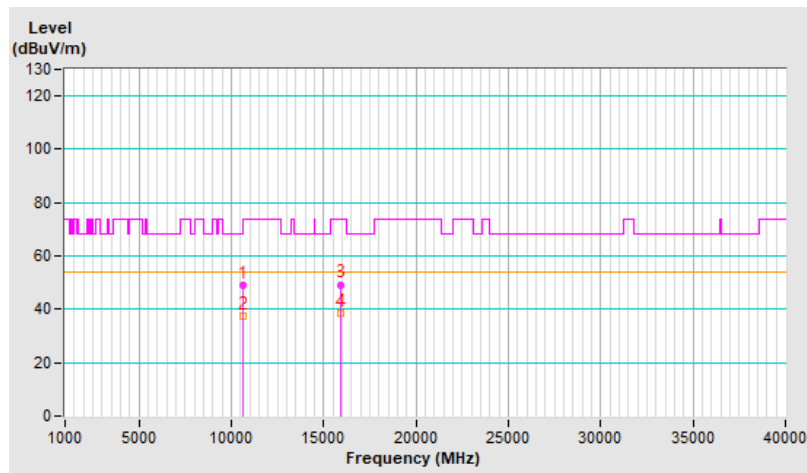


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.9 PK	74.0	-25.1	3.50 H	49	31.8	17.1
2	11000.00	38.0 AV	54.0	-16.0	3.50 H	49	20.9	17.1
3	#16500.00	48.6 PK	68.2	-19.6	1.48 H	172	29.1	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

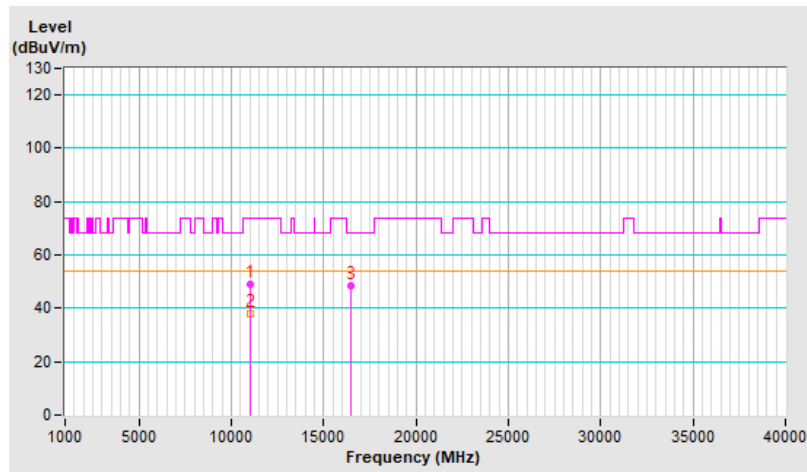


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.3 PK	74.0	-24.7	2.07 V	198	32.2	17.1
2	11000.00	38.2 AV	54.0	-15.8	2.07 V	198	21.1	17.1
3	#16500.00	48.3 PK	68.2	-19.9	1.69 V	48	28.8	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

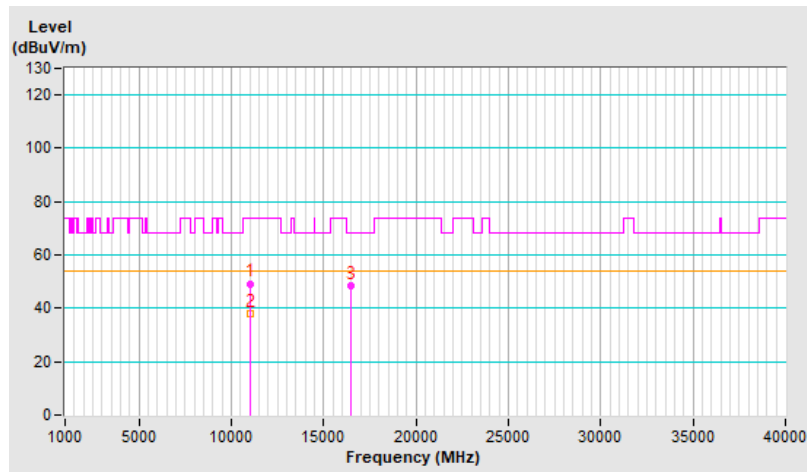


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.0 PK	74.0	-25.0	3.46 H	61	32.2	16.8
2	11160.00	38.0 AV	54.0	-16.0	3.46 H	61	21.2	16.8
3	#16740.00	48.7 PK	68.2	-19.5	1.48 H	184	27.3	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

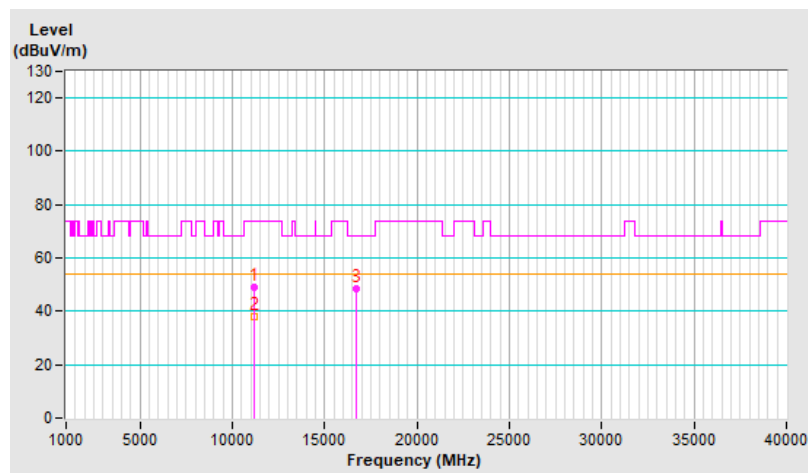


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.7 PK	74.0	-24.3	2.09 V	201	32.9	16.8
2	11160.00	38.1 AV	54.0	-15.9	2.09 V	201	21.3	16.8
3	#16740.00	49.4 PK	68.2	-18.8	1.57 V	25	28.0	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

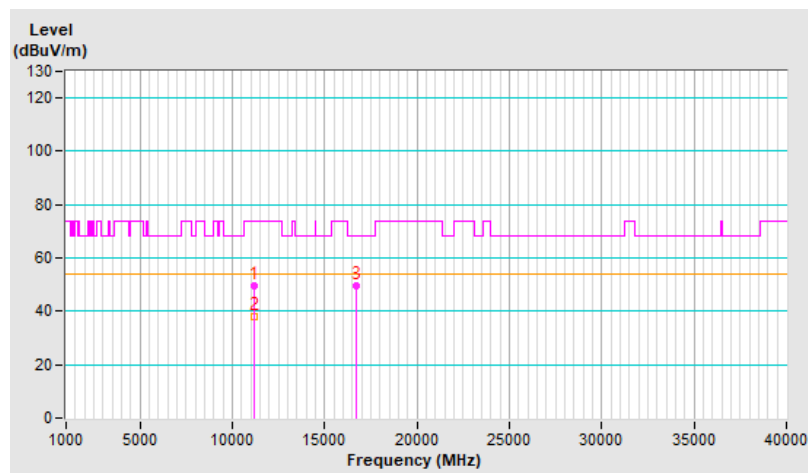




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.53 H	37	32.6	16.7
2	11400.00	38.4 AV	54.0	-15.6	3.53 H	37	21.7	16.7
3	#17100.00	48.2 PK	68.2	-20.0	1.48 H	186	27.8	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

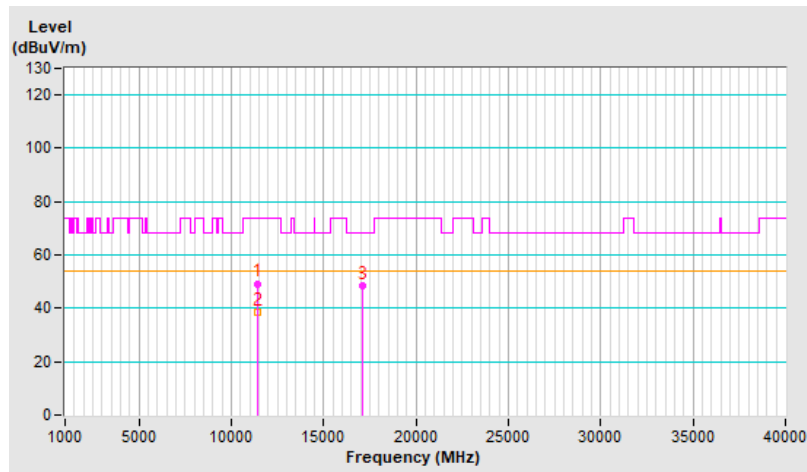


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.0 PK	74.0	-24.0	2.07 V	198	33.3	16.7
2	11400.00	38.2 AV	54.0	-15.8	2.07 V	198	21.5	16.7
3	#17100.00	48.7 PK	68.2	-19.5	1.61 V	32	28.3	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

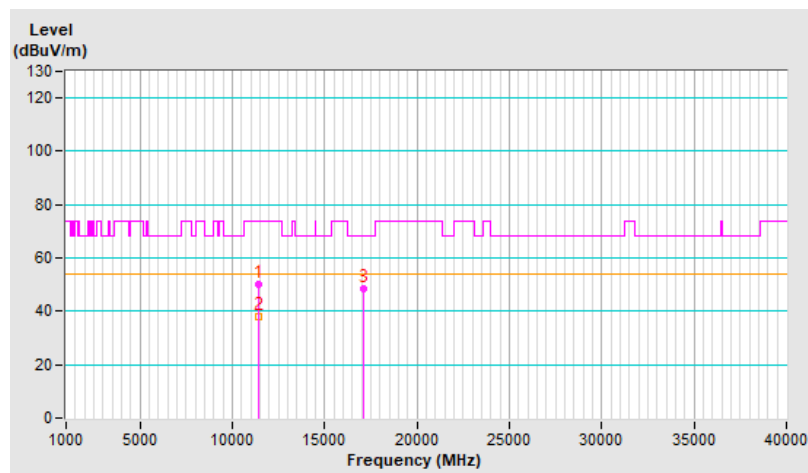


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	3.54 H	49	32.1	16.7
2	11440.00	38.0 AV	54.0	-16.0	3.54 H	49	21.3	16.7
3	#17160.00	48.9 PK	68.2	-19.3	1.54 H	159	28.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

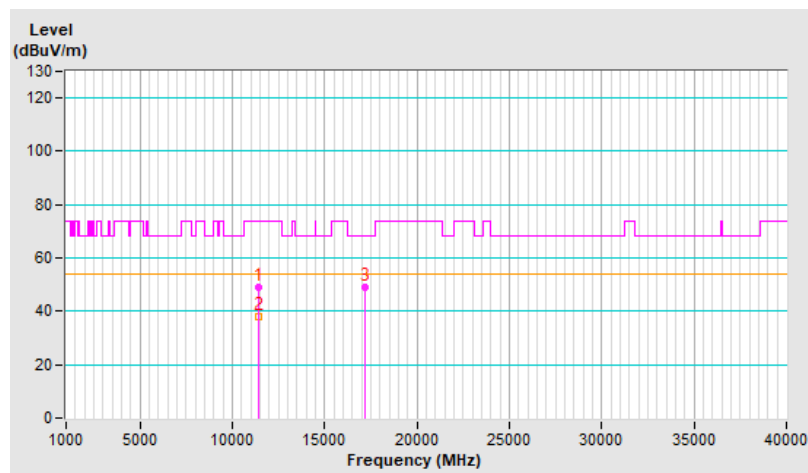


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.3 PK	74.0	-23.7	2.09 V	195	33.6	16.7
2	11440.00	38.5 AV	54.0	-15.5	2.09 V	195	21.8	16.7
3	#17160.00	50.1 PK	68.2	-18.1	1.61 V	11	29.8	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

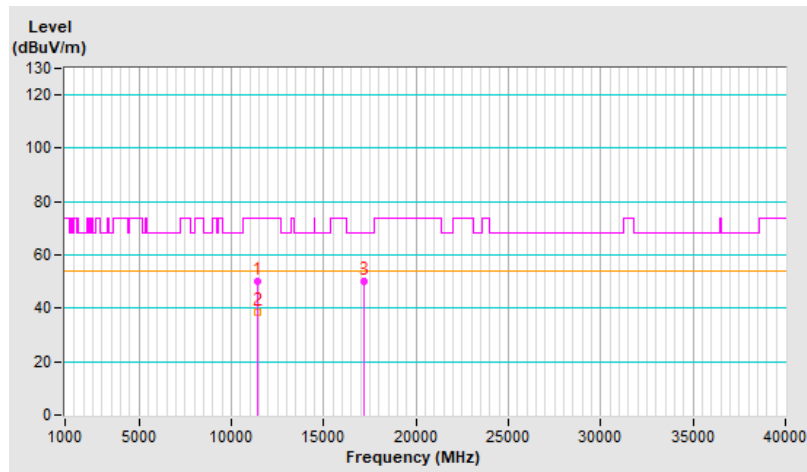


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.3 PK	74.0	-19.7	3.50 H	68	37.5	16.8
2	11490.00	43.3 AV	54.0	-10.7	3.50 H	68	26.5	16.8
3	#17235.00	52.7 PK	68.2	-15.5	1.46 H	185	32.4	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

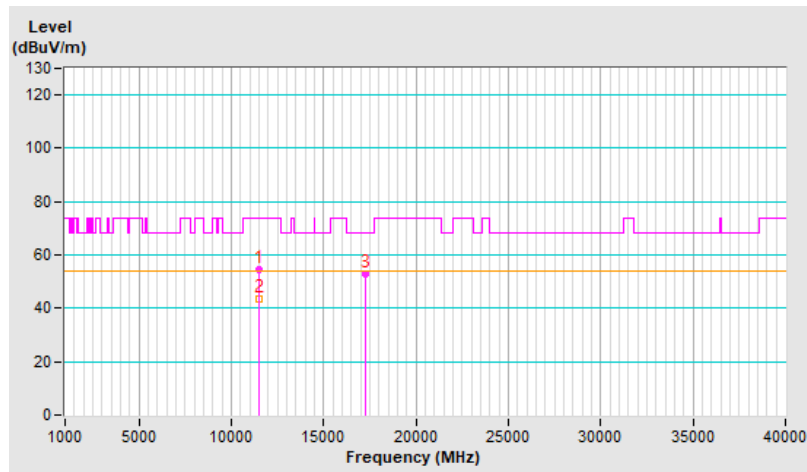


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.0 PK	74.0	-20.0	2.09 V	206	37.2	16.8
2	11490.00	42.9 AV	54.0	-11.1	2.09 V	206	26.1	16.8
3	#17235.00	51.9 PK	68.2	-16.3	1.53 V	34	31.6	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

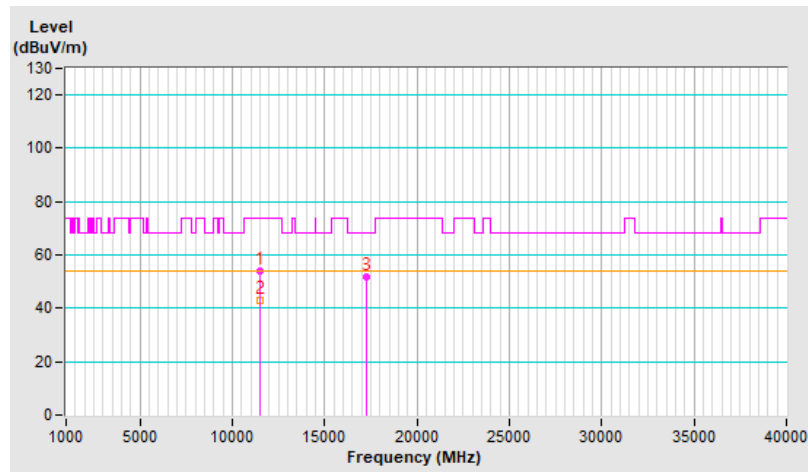


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	54.8 PK	74.0	-19.2	3.49 H	53	38.0	16.8
2	11570.00	43.6 AV	54.0	-10.4	3.49 H	53	26.8	16.8
3	#17355.00	52.6 PK	68.2	-15.6	1.48 H	182	31.4	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

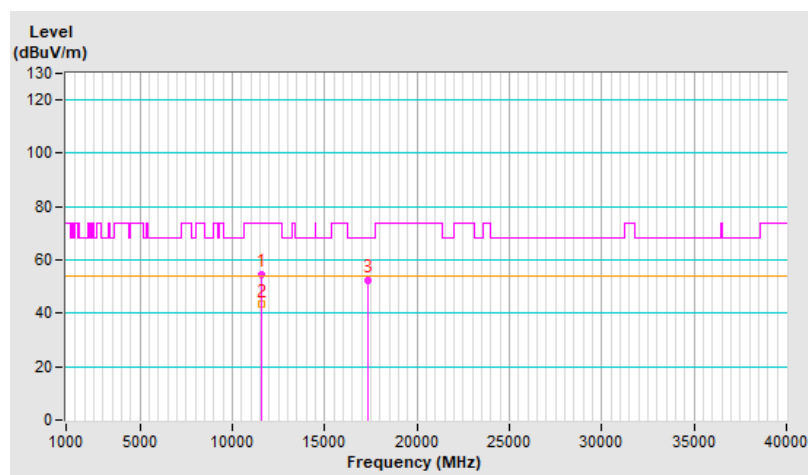


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	54.6 PK	74.0	-19.4	2.12 V	191	37.8	16.8
2	11570.00	43.2 AV	54.0	-10.8	2.12 V	191	26.4	16.8
3	#17355.00	52.1 PK	68.2	-16.1	1.58 V	41	30.9	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

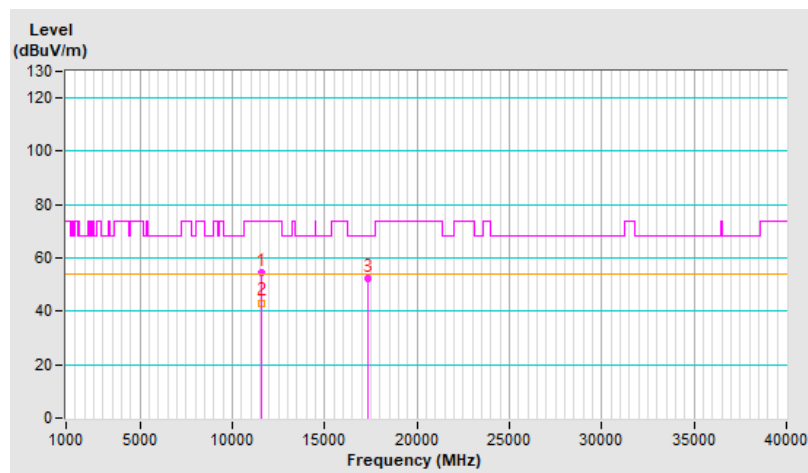




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.4 PK	74.0	-19.6	3.50 H	82	37.7	16.7
2	11650.00	43.4 AV	54.0	-10.6	3.50 H	82	26.7	16.7
3	#17475.00	52.2 PK	68.2	-16.0	1.49 H	194	29.9	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

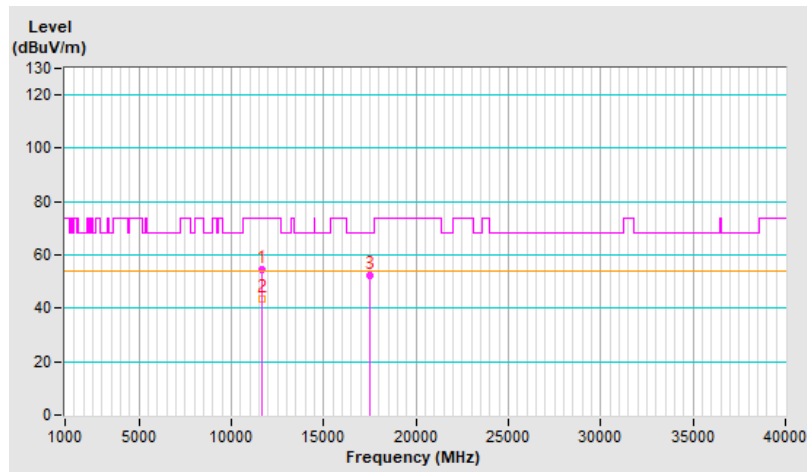


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.1 PK	74.0	-19.9	2.08 V	220	37.4	16.7
2	11650.00	42.9 AV	54.0	-11.1	2.08 V	220	26.2	16.7
3	#17475.00	52.1 PK	68.2	-16.1	1.53 V	42	29.8	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

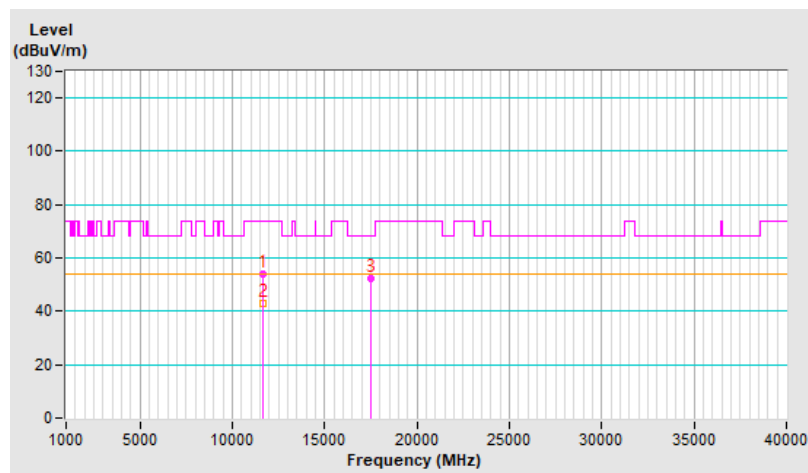


**For 2S2T**

<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.7 PK	68.2	-18.5	3.65 H	50	33.8	15.9
2	15540.00	48.0 PK	74.0	-26.0	1.35 H	149	31.5	16.5
3	15540.00	36.1 AV	54.0	-17.9	1.35 H	149	19.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

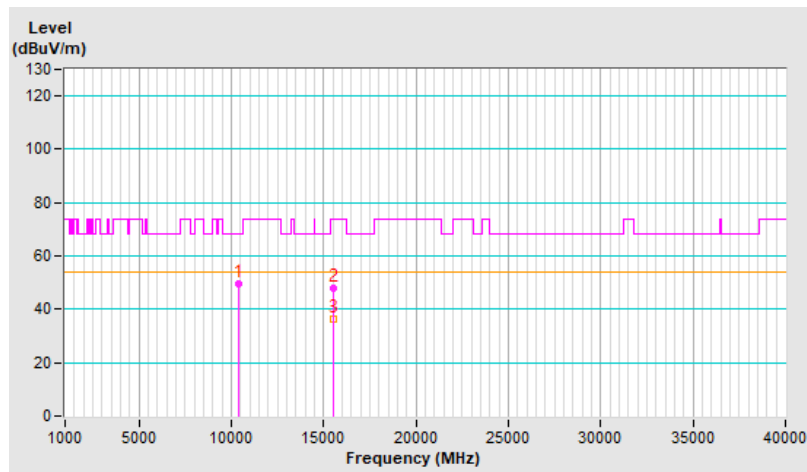


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 36 : 5180 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	49.8 PK	68.2	-18.4	2.11 V	181	33.9	15.9
2	15540.00	48.0 PK	74.0	-26.0	1.55 V	55	31.5	16.5
3	15540.00	36.3 AV	54.0	-17.7	1.55 V	55	19.8	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

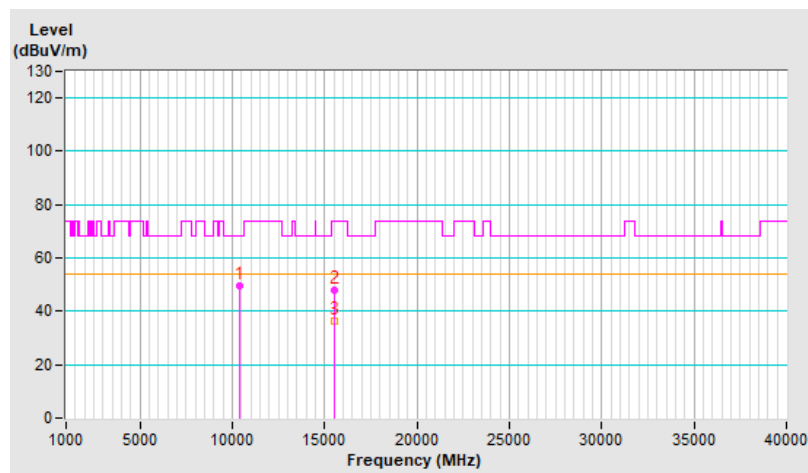


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.6 PK	68.2	-18.6	3.64 H	44	33.5	16.1
2	15600.00	48.3 PK	74.0	-25.7	1.37 H	158	31.7	16.6
3	15600.00	36.8 AV	54.0	-17.2	1.37 H	158	20.2	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

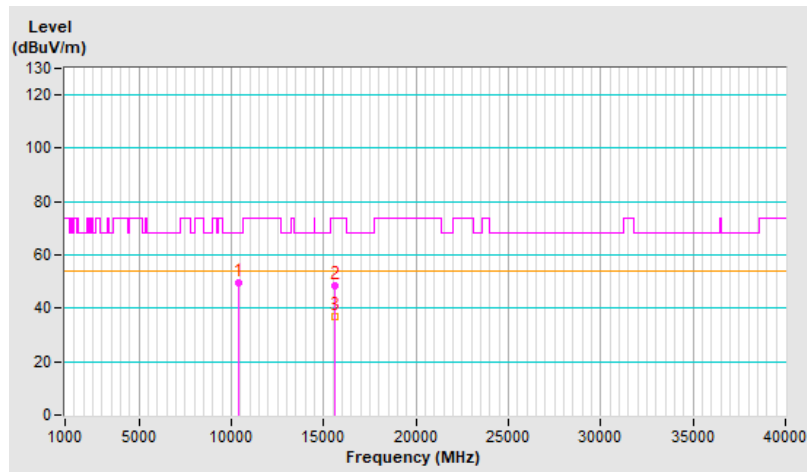


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 40 : 5200 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	49.8 PK	68.2	-18.4	2.08 V	166	33.7	16.1
2	15600.00	47.8 PK	74.0	-26.2	1.55 V	39	31.2	16.6
3	15600.00	36.2 AV	54.0	-17.8	1.55 V	39	19.6	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

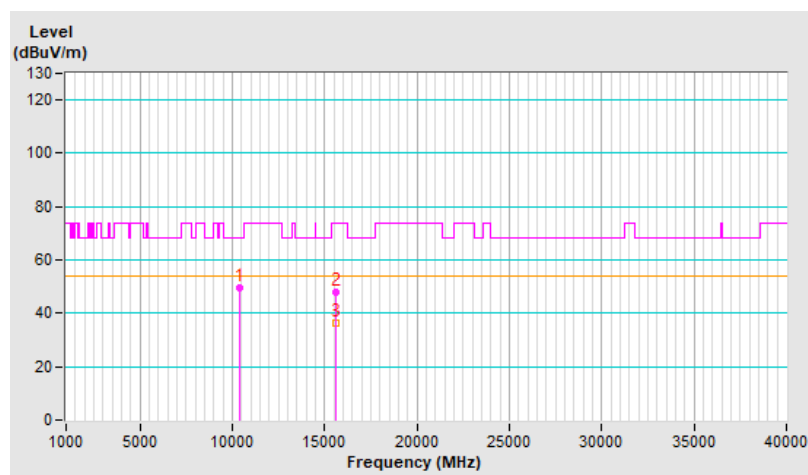


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.8 PK	68.2	-18.4	3.71 H	64	33.8	16.0
2	15720.00	48.2 PK	74.0	-25.8	1.35 H	148	31.4	16.8
3	15720.00	36.8 AV	54.0	-17.2	1.35 H	148	20.0	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

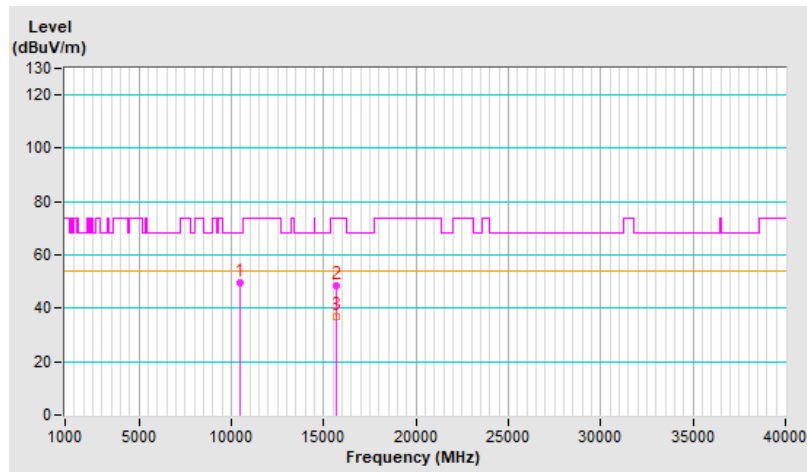


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 48 : 5240 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10480.00	49.2 PK	68.2	-19.0	2.12 V	193	33.2	16.0
2	15720.00	48.1 PK	74.0	-25.9	1.60 V	43	31.3	16.8
3	15720.00	36.3 AV	54.0	-17.7	1.60 V	43	19.5	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

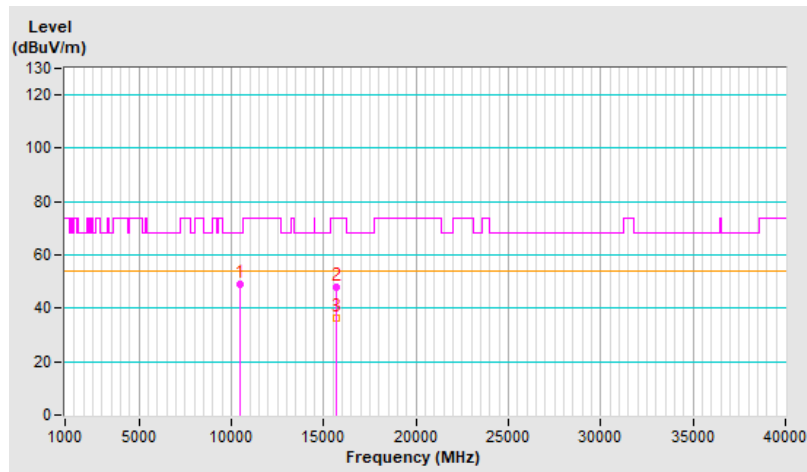




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.4 PK	68.2	-19.8	3.60 H	79	32.3	16.1
2	15780.00	49.2 PK	74.0	-24.8	1.46 H	198	32.4	16.8
3	15780.00	37.2 AV	54.0	-16.8	1.46 H	198	20.4	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

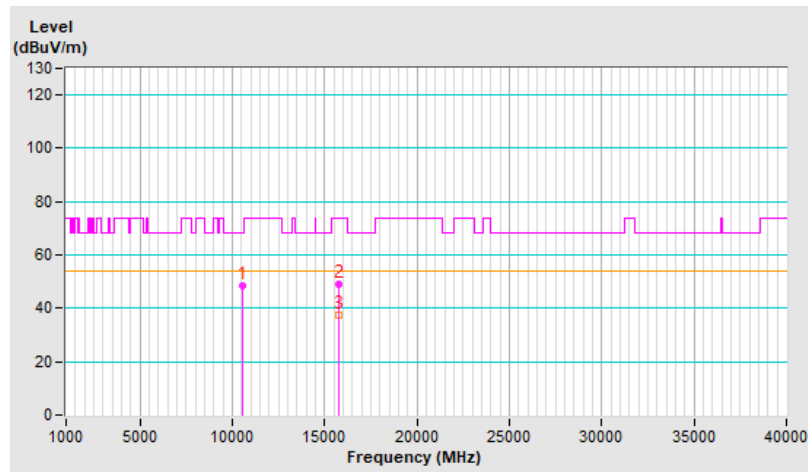


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	47.5 PK	68.2	-20.7	2.01 V	146	31.4	16.1
2	15780.00	49.3 PK	74.0	-24.7	1.49 V	49	32.5	16.8
3	15780.00	37.6 AV	54.0	-16.4	1.49 V	49	20.8	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

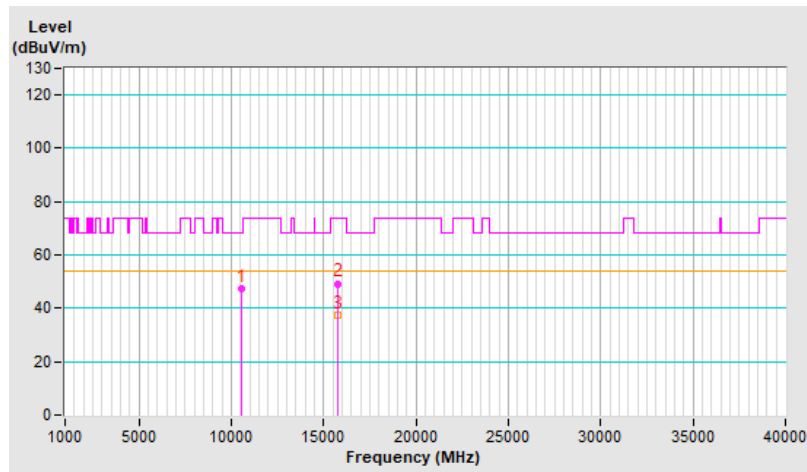


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.4 PK	74.0	-25.6	3.61 H	77	31.9	16.5
2	10600.00	36.7 AV	54.0	-17.3	3.61 H	77	20.2	16.5
3	15900.00	49.8 PK	74.0	-24.2	1.51 H	209	32.7	17.1
4	15900.00	37.5 AV	54.0	-16.5	1.51 H	209	20.4	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

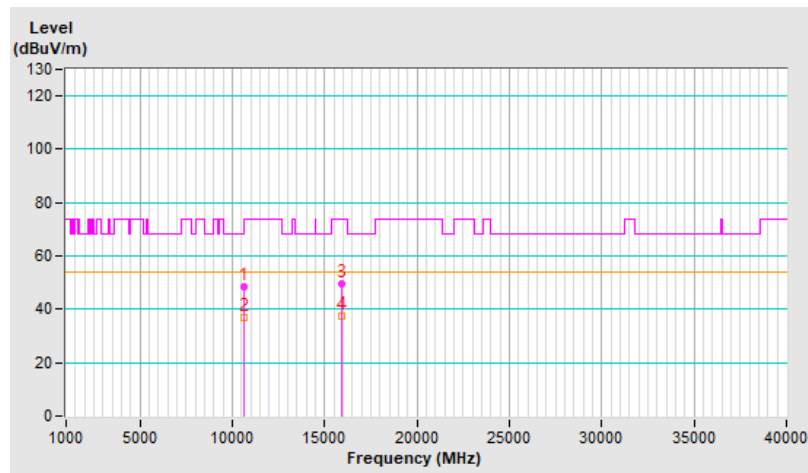


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.7 PK	74.0	-27.3	2.06 V	137	30.2	16.5
2	10600.00	36.4 AV	54.0	-17.6	2.06 V	137	19.9	16.5
3	15900.00	49.4 PK	74.0	-24.6	1.46 V	34	32.3	17.1
4	15900.00	37.5 AV	54.0	-16.5	1.46 V	34	20.4	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

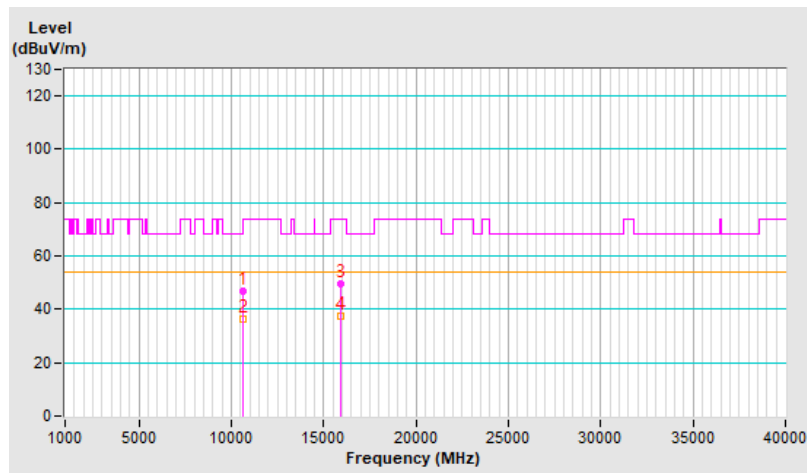


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.66 H	67	31.9	16.6
2	10640.00	36.1 AV	54.0	-17.9	3.66 H	67	19.5	16.6
3	15960.00	49.1 PK	74.0	-24.9	1.49 H	204	32.0	17.1
4	15960.00	37.8 AV	54.0	-16.2	1.49 H	204	20.7	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

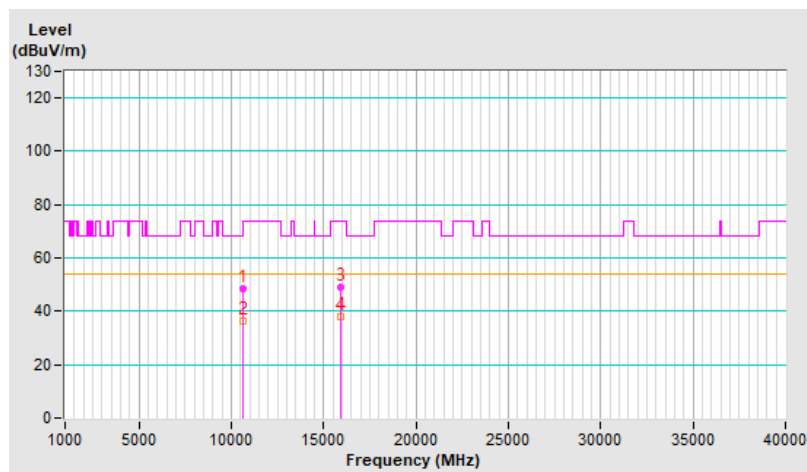


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.1 PK	74.0	-25.9	1.96 V	132	31.5	16.6
2	10640.00	36.5 AV	54.0	-17.5	1.96 V	132	19.9	16.6
3	15960.00	49.1 PK	74.0	-24.9	1.46 V	35	32.0	17.1
4	15960.00	37.4 AV	54.0	-16.6	1.46 V	35	20.3	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

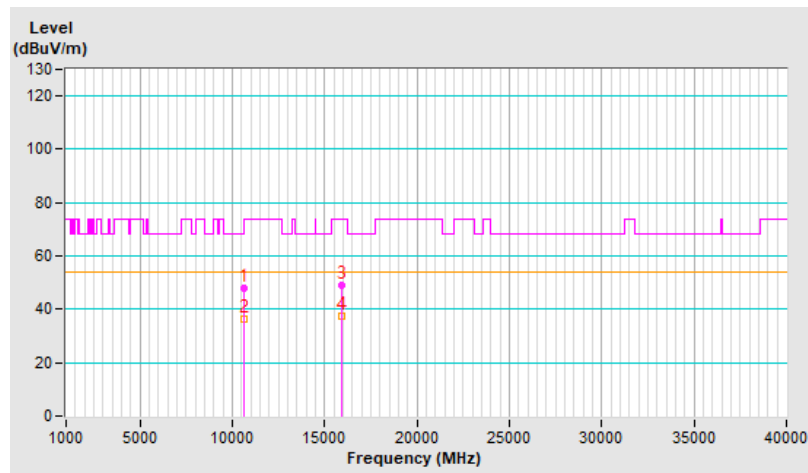


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.8 PK	74.0	-25.2	3.61 H	78	31.7	17.1
2	11000.00	37.4 AV	54.0	-16.6	3.61 H	78	20.3	17.1
3	#16500.00	47.9 PK	68.2	-20.3	1.41 H	185	28.4	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

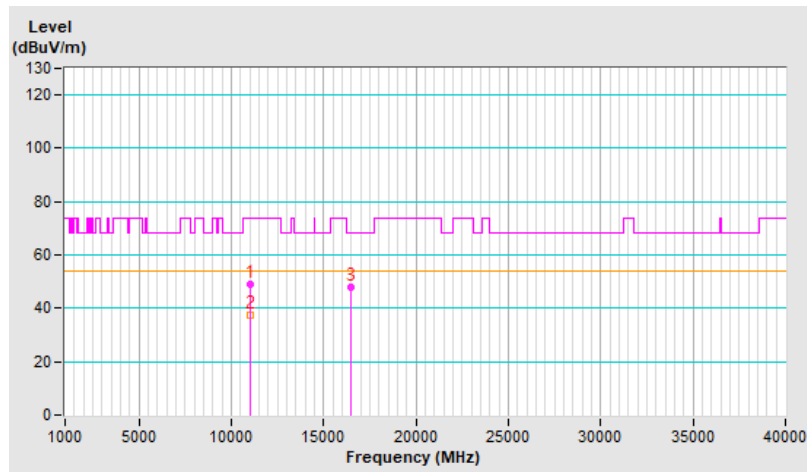




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.8 PK	74.0	-25.2	2.01 V	221	31.7	17.1
2	11000.00	38.2 AV	54.0	-15.8	2.01 V	221	21.1	17.1
3	#16500.00	48.5 PK	68.2	-19.7	1.53 V	17	29.0	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

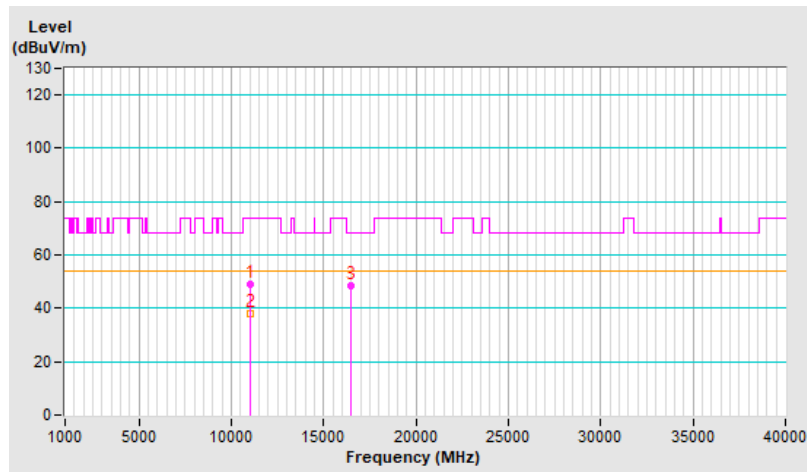




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.0 PK	74.0	-25.0	3.58 H	61	32.2	16.8
2	11160.00	37.6 AV	54.0	-16.4	3.58 H	61	20.8	16.8
3	#16740.00	48.1 PK	68.2	-20.1	1.51 H	187	26.7	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

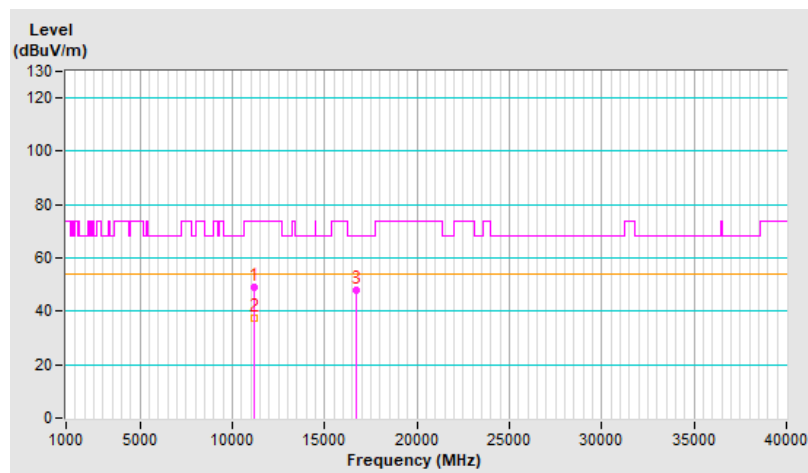


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.3 PK	74.0	-24.7	2.04 V	230	32.5	16.8
2	11160.00	38.5 AV	54.0	-15.5	2.04 V	230	21.7	16.8
3	#16740.00	48.7 PK	68.2	-19.5	1.57 V	6	27.3	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

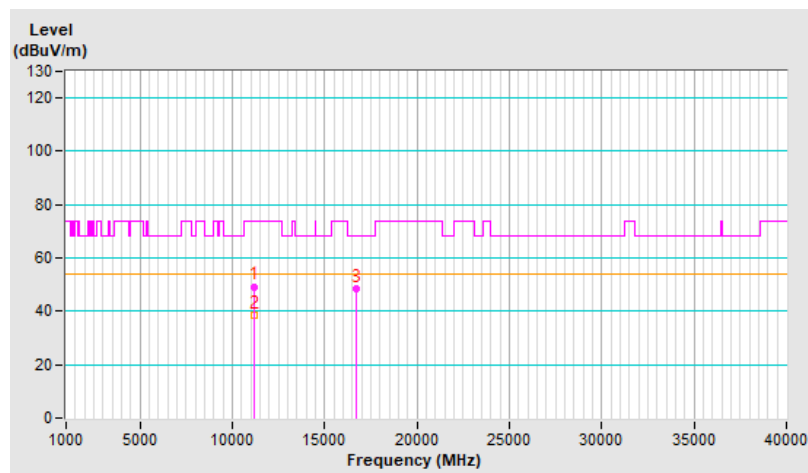


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.4 PK	74.0	-24.6	3.56 H	113	32.7	16.7
2	11400.00	37.7 AV	54.0	-16.3	3.56 H	113	21.0	16.7
3	#17100.00	48.4 PK	68.2	-19.8	1.53 H	181	28.0	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

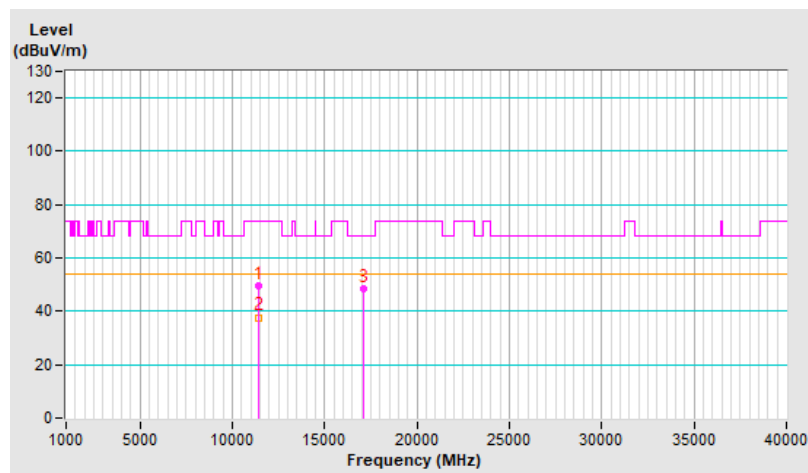


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.6 PK	74.0	-25.4	1.97 V	215	31.9	16.7
2	11400.00	38.1 AV	54.0	-15.9	1.97 V	215	21.4	16.7
3	#17100.00	48.7 PK	68.2	-19.5	1.54 V	23	28.3	20.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

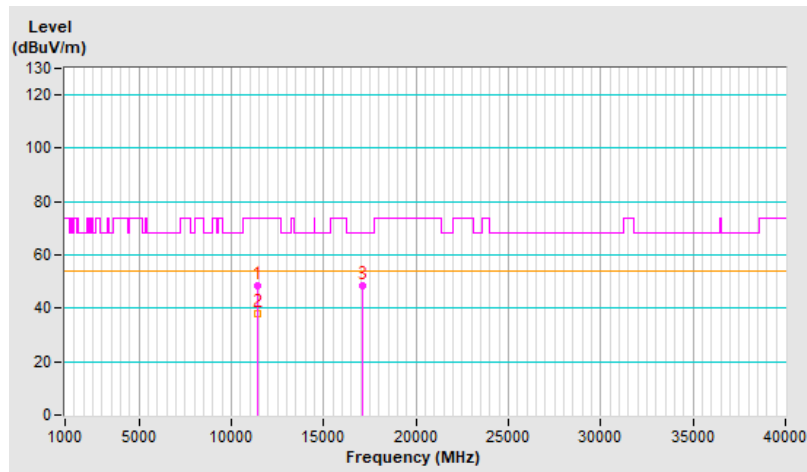


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.7 PK	74.0	-24.3	3.55 H	104	33.0	16.7
2	11440.00	38.1 AV	54.0	-15.9	3.55 H	104	21.4	16.7
3	#17160.00	48.5 PK	68.2	-19.7	1.49 H	180	28.2	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

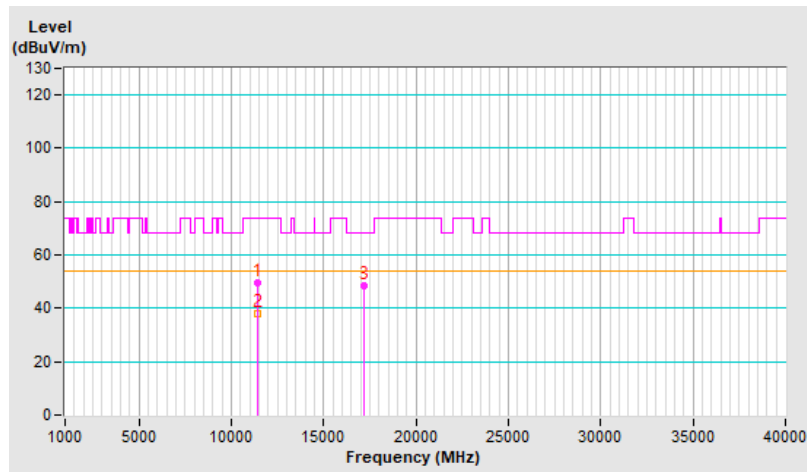


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.9 PK	74.0	-25.1	2.00 V	214	32.2	16.7
2	11440.00	38.2 AV	54.0	-15.8	2.00 V	214	21.5	16.7
3	#17160.00	48.2 PK	68.2	-20.0	1.56 V	24	27.9	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

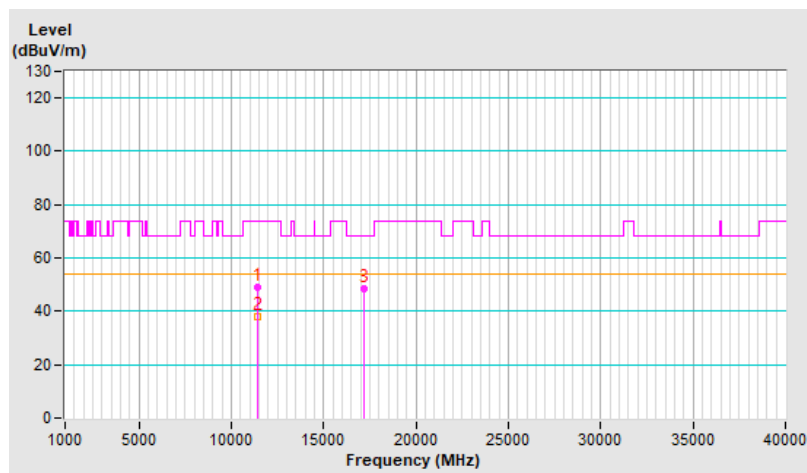


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.6 PK	74.0	-19.4	3.50 H	37	37.8	16.8
2	11490.00	43.4 AV	54.0	-10.6	3.50 H	37	26.6	16.8
3	#17235.00	52.4 PK	68.2	-15.8	1.52 H	179	32.1	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

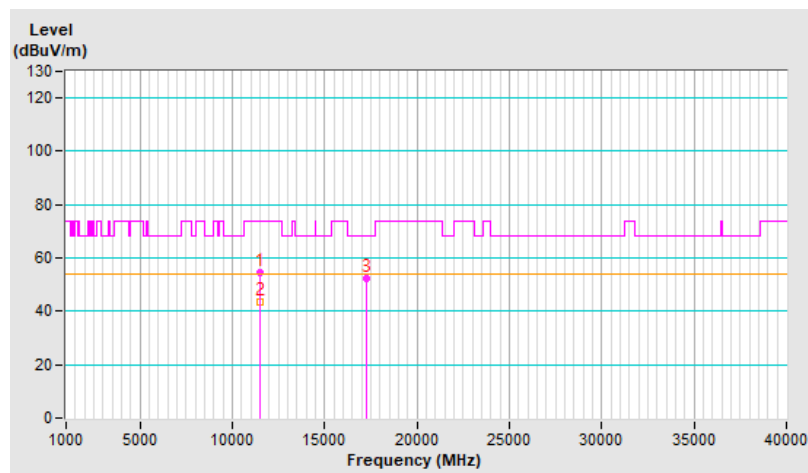


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 149 : 5745 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	54.8 PK	74.0	-19.2	2.08 V	199	38.0	16.8
2	11490.00	43.6 AV	54.0	-10.4	2.08 V	199	26.8	16.8
3	#17235.00	52.3 PK	68.2	-15.9	1.59 V	40	32.0	20.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

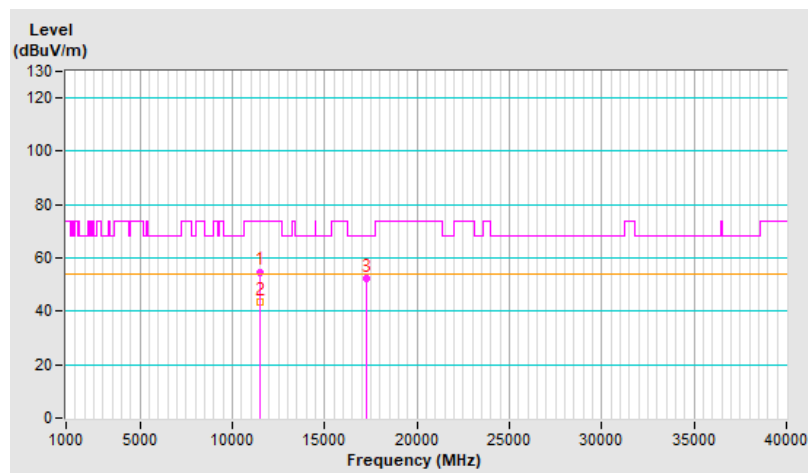




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	54.6 PK	74.0	-19.4	3.50 H	37	37.8	16.8
2	11570.00	43.4 AV	54.0	-10.6	3.50 H	37	26.6	16.8
3	#17355.00	52.4 PK	68.2	-15.8	1.52 H	179	31.2	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

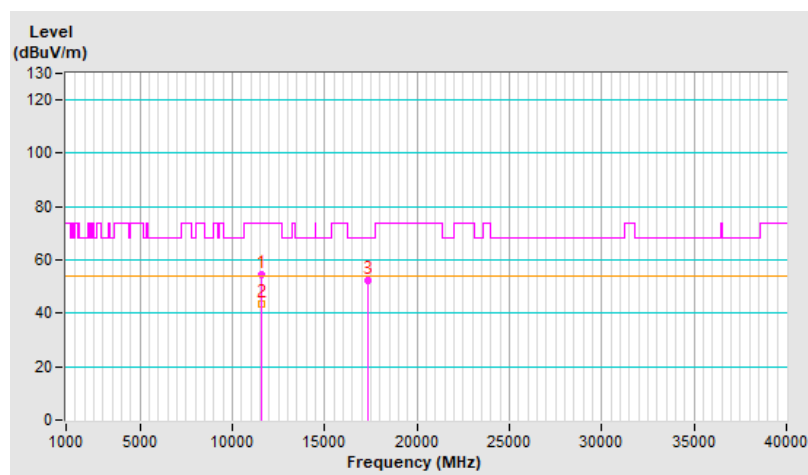


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 157 : 5785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	54.4 PK	74.0	-19.6	2.09 V	198	37.6	16.8
2	11570.00	43.5 AV	54.0	-10.5	2.09 V	198	26.7	16.8
3	#17355.00	52.6 PK	68.2	-15.6	1.56 V	55	31.4	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

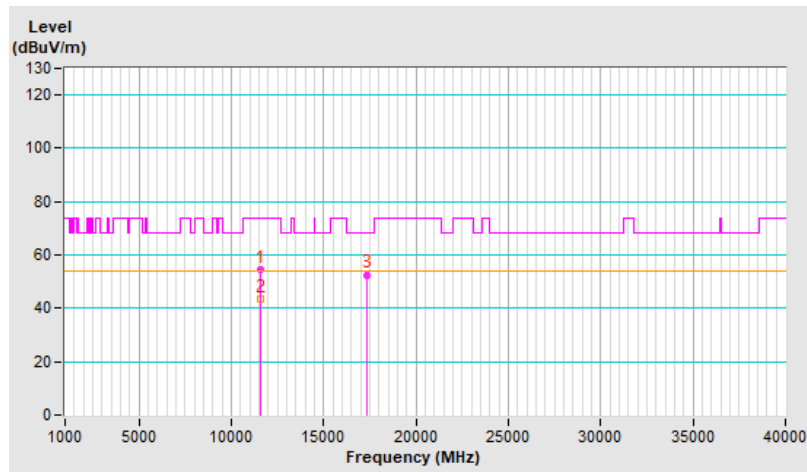


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.4 PK	74.0	-19.6	3.56 H	43	37.7	16.7
2	11650.00	43.0 AV	54.0	-11.0	3.56 H	43	26.3	16.7
3	#17475.00	52.6 PK	68.2	-15.6	1.54 H	181	30.3	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

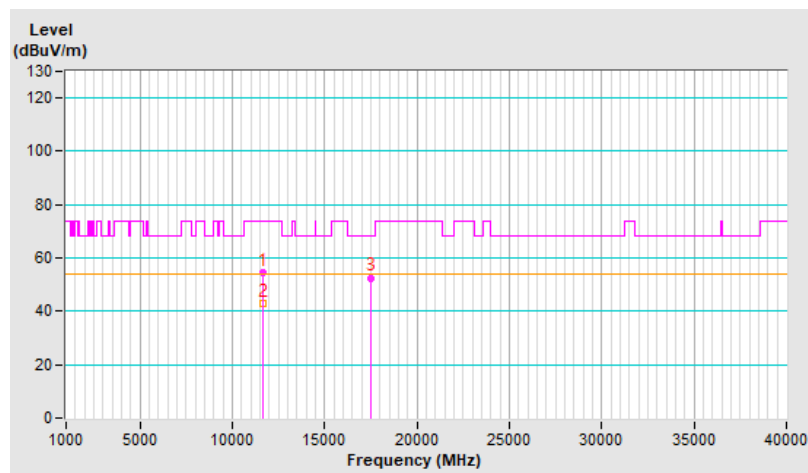


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 165 : 5825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	54.4 PK	74.0	-19.6	2.11 V	206	37.7	16.7
2	11650.00	43.5 AV	54.0	-10.5	2.11 V	206	26.8	16.7
3	#17475.00	52.5 PK	68.2	-15.7	1.62 V	60	30.2	22.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

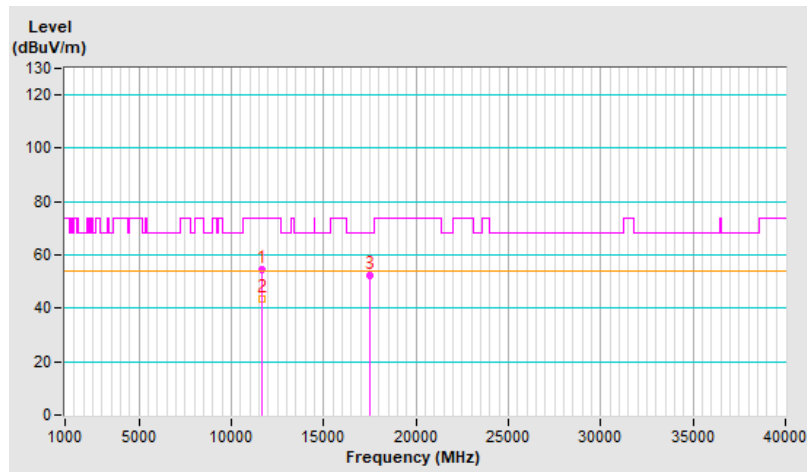


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	49.9 PK	68.2	-18.3	3.54 H	49	33.9	16.0
2	15570.00	47.9 PK	74.0	-26.1	1.51 H	164	31.4	16.5
3	15570.00	37.0 AV	54.0	-17.0	1.51 H	164	20.5	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

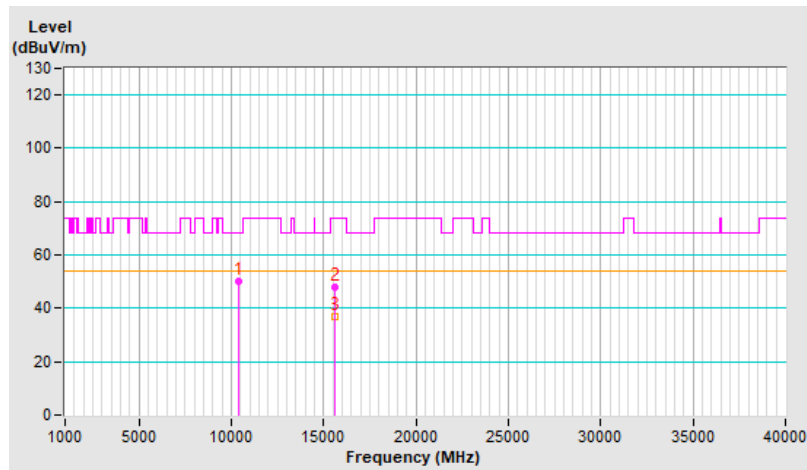


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 38 : 5190 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10380.00	50.5 PK	68.2	-17.7	2.06 V	200	34.5	16.0
2	15570.00	49.4 PK	74.0	-24.6	1.51 V	34	32.9	16.5
3	15570.00	37.0 AV	54.0	-17.0	1.51 V	34	20.5	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

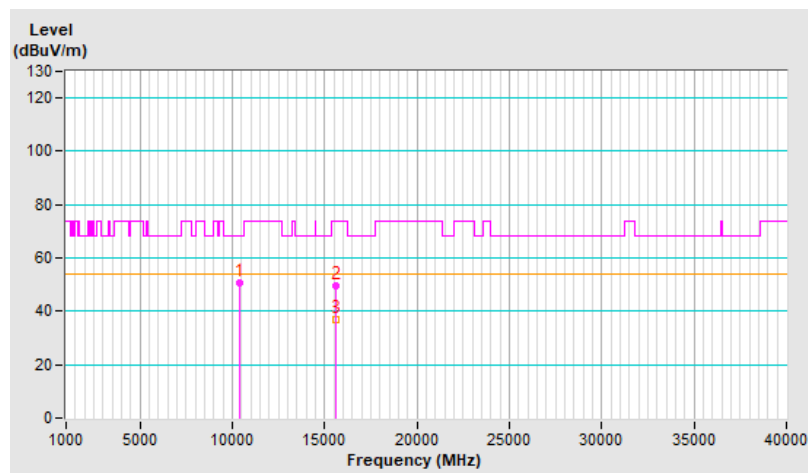


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	50.2 PK	68.2	-18.0	3.55 H	50	34.2	16.0
2	15690.00	47.9 PK	74.0	-26.1	1.51 H	148	31.2	16.7
3	15690.00	36.7 AV	54.0	-17.3	1.51 H	148	20.0	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

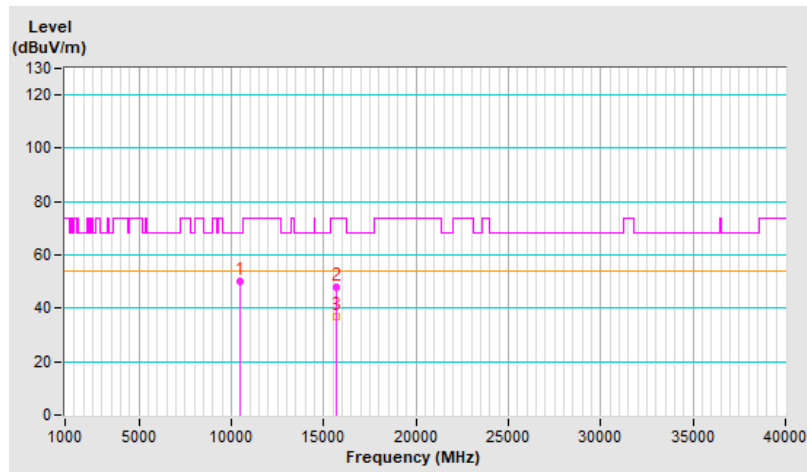


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 46 : 5230 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	51.0 PK	68.2	-17.2	2.06 V	189	35.0	16.0
2	15690.00	49.0 PK	74.0	-25.0	1.47 V	36	32.3	16.7
3	15690.00	36.6 AV	54.0	-17.4	1.47 V	36	19.9	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

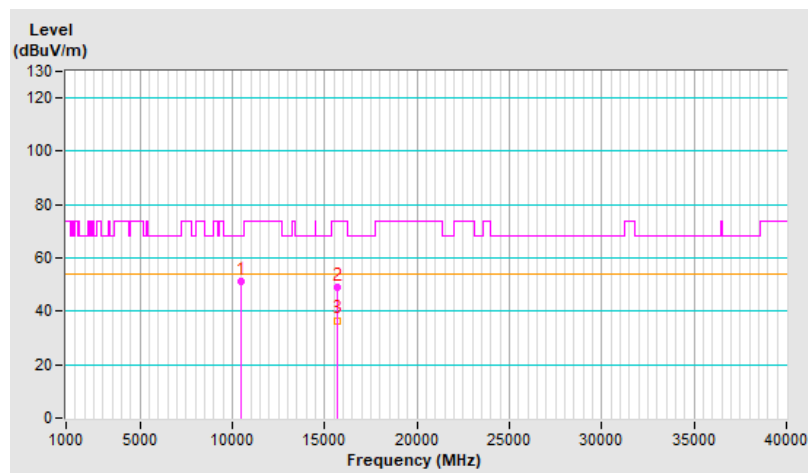




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	50.7 PK	68.2	-17.5	3.52 H	39	34.5	16.2
2	15810.00	48.0 PK	74.0	-26.0	1.53 H	160	31.2	16.8
3	15810.00	36.5 AV	54.0	-17.5	1.53 H	160	19.7	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

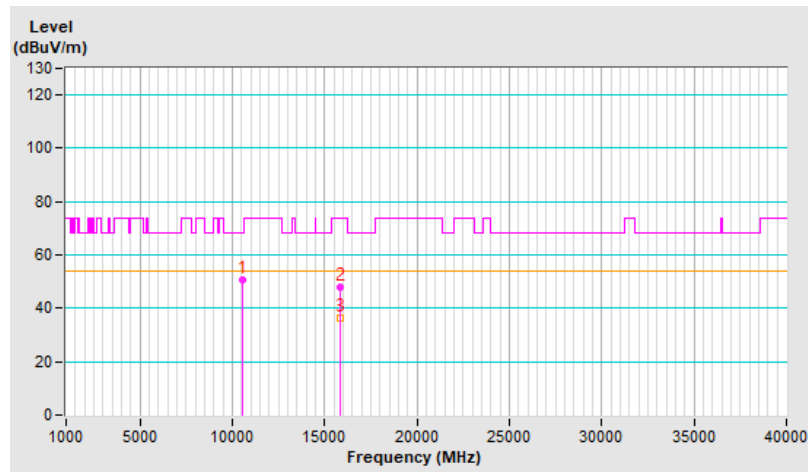


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	48.9 PK	68.2	-19.3	2.16 V	206	32.7	16.2
2	15810.00	49.1 PK	74.0	-24.9	1.66 V	57	32.3	16.8
3	15810.00	37.2 AV	54.0	-16.8	1.66 V	57	20.4	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

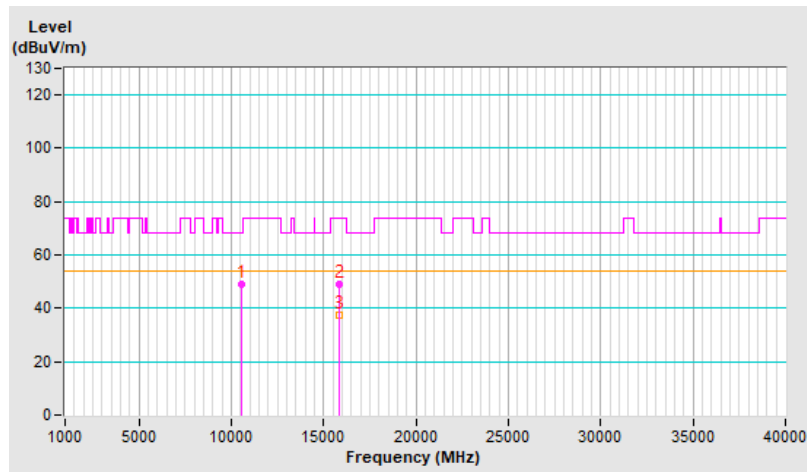


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.2 PK	74.0	-24.8	3.59 H	24	32.6	16.6
2	10620.00	38.5 AV	54.0	-15.5	3.59 H	24	21.9	16.6
3	15930.00	48.2 PK	74.0	-25.8	1.47 H	142	31.1	17.1
4	15930.00	36.7 AV	54.0	-17.3	1.47 H	142	19.6	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

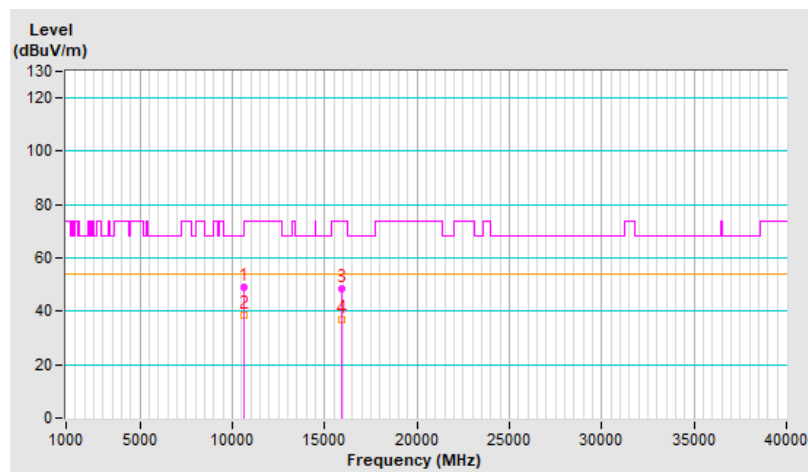


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.6 PK	74.0	-24.4	2.15 V	213	33.0	16.6
2	10620.00	38.3 AV	54.0	-15.7	2.15 V	213	21.7	16.6
3	15930.00	47.7 PK	74.0	-26.3	1.57 V	40	30.6	17.1
4	15930.00	36.6 AV	54.0	-17.4	1.57 V	40	19.5	17.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

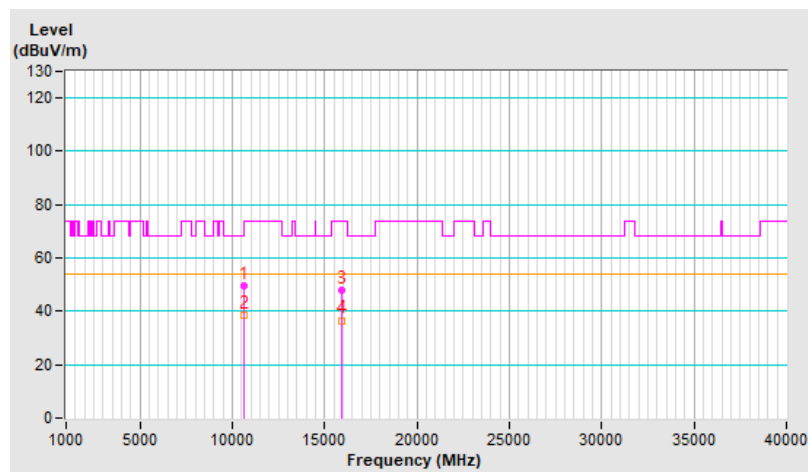


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.7 PK	74.0	-24.3	3.52 H	9	32.6	17.1
2	11020.00	38.9 AV	54.0	-15.1	3.52 H	9	21.8	17.1
3	#16530.00	48.7 PK	68.2	-19.5	1.38 H	144	28.8	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

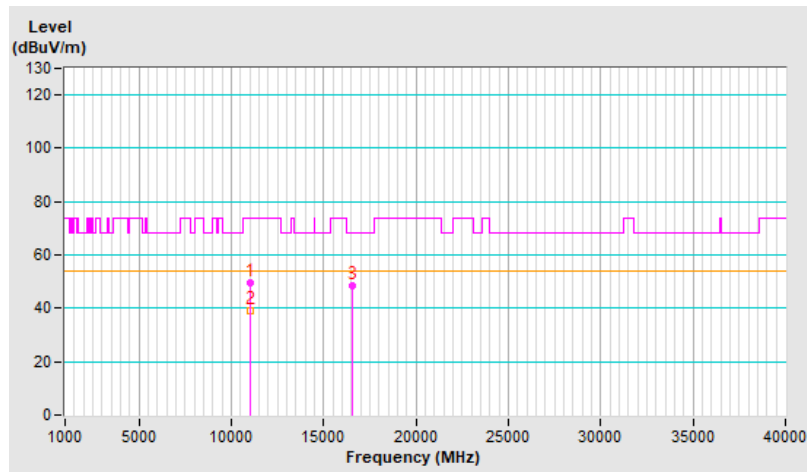


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.4 PK	74.0	-24.6	2.09 V	195	32.3	17.1
2	11020.00	38.2 AV	54.0	-15.8	2.09 V	195	21.1	17.1
3	#16530.00	47.7 PK	68.2	-20.5	1.56 V	42	27.8	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

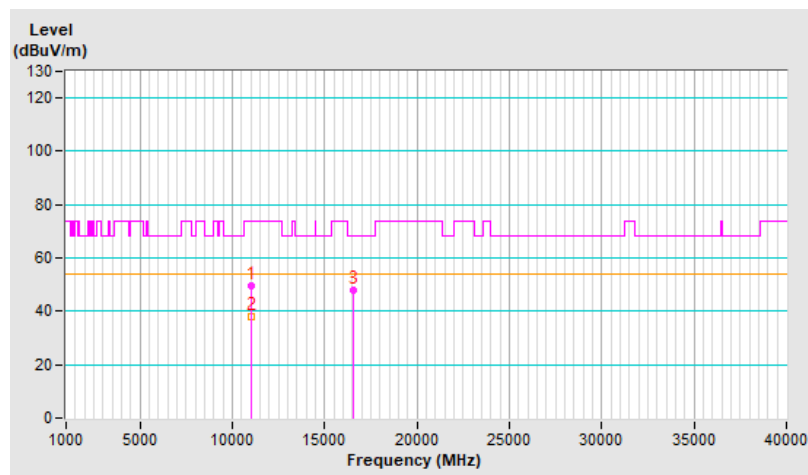


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.5 PK	74.0	-24.5	3.58 H	24	32.3	17.2
2	11100.00	38.5 AV	54.0	-15.5	3.58 H	24	21.3	17.2
3	#16650.00	48.3 PK	68.2	-19.9	1.42 H	155	27.1	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

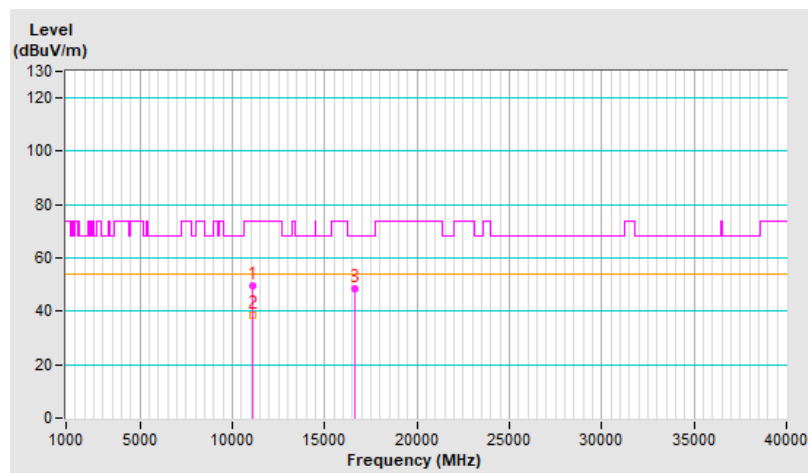


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.6 PK	74.0	-24.4	2.08 V	207	32.4	17.2
2	11100.00	38.5 AV	54.0	-15.5	2.08 V	207	21.3	17.2
3	#16650.00	48.4 PK	68.2	-19.8	1.64 V	42	27.2	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

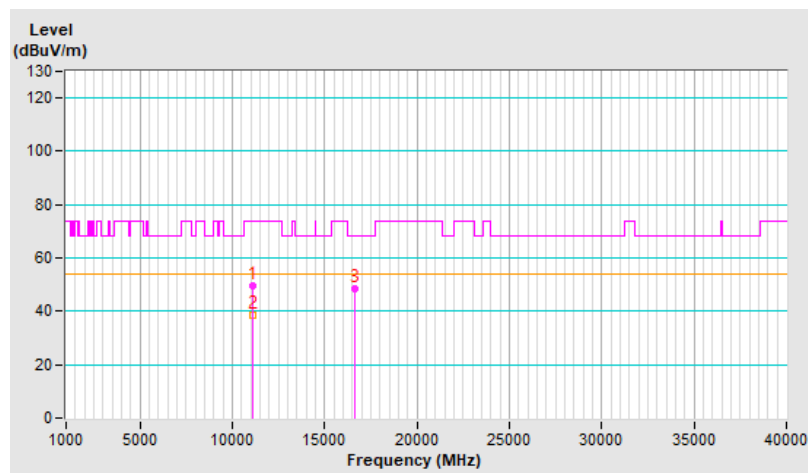



<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22°C, 60% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.6 PK	74.0	-24.4	3.51 H	64	32.8	16.8
2	11340.00	38.1 AV	54.0	-15.9	3.51 H	64	21.3	16.8
3	#17010.00	48.3 PK	68.2	-19.9	1.42 H	158	27.3	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

