

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBARR-WTW-P23110067-4
FCC ID: RAS-MT7925B14L
Product: 2TX 11be (WiFi7) BW160 + BT/BLE Combo Card
Brand: MediaTek
Model No.: MT7925B14L
Received Date: 2023/11/6
Test Date: 2023/11/14 ~ 2024/1/22
Issued Date: 2024/2/23

Applicant: MediaTek Inc.

Address: No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, 30078 Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by: _____



Date: _____

2024/2/23

Wen Yu / Assistant Manager

This test report consists of 379 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Phoenix Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List	10
3.4 Test Mode Applicability and Tested Channel Detail	11
3.5 Duty Cycle of Test Signal	14
3.6 Test Program Used and Operation Descriptions	23
3.7 Connection Diagram of EUT and Peripheral Devices	23
3.8 Configuration of Peripheral Devices and Cable Connections	24
4 Test Instruments	25
4.1 RF Output Power	25
4.2 Power Spectral Density	25
4.3 6 dB Bandwidth	25
4.4 Frequency Stability	25
4.5 AC Power Conducted Emissions	26
4.6 Unwanted Emissions below 1 GHz	27
4.7 Unwanted Emissions above 1 GHz	28
5 Limits of Test Items	29
5.1 RF Output Power	29
5.2 Power Spectral Density	29
5.3 6 dB Bandwidth	29
5.4 Frequency Stability	29
5.5 AC Power Conducted Emissions	29
5.6 Unwanted Emissions below 1 GHz	30
5.7 Unwanted Emissions above 1 GHz	30
6 Test Arrangements	31
6.1 RF Output Power	31
6.1.1 Test Setup	31
6.1.2 Test Procedure	31
6.2 Power Spectral Density	31
6.2.1 Test Setup	31
6.2.2 Test Procedure	31
6.3 6 dB Bandwidth	32
6.3.1 Test Setup	32
6.3.2 Test Procedure	32
6.4 Frequency Stability	32
6.4.1 Test Setup	32
6.4.2 Test Procedure	32
6.5 AC Power Conducted Emissions	33
6.5.1 Test Setup	33
6.5.2 Test Procedure	33
6.6 Unwanted Emissions below 1 GHz	34
6.6.1 Test Setup	34
6.6.2 Test Procedure	35
6.7 Unwanted Emissions above 1 GHz	37
6.7.1 Test Setup	37
6.7.2 Test Procedure	37
7 Test Results of Test Item	39



7.1	RF Output Power	39
7.2	Power Spectral Density	48
7.3	6 dB Bandwidth	60
7.4	Frequency Stability	69
7.5	AC Power Conducted Emissions	70
7.6	Unwanted Emissions below 1 GHz	74
7.7	Unwanted Emissions above 1 GHz	80
8	Pictures of Test Arrangements	378
9	Information of the Testing Laboratories	379



Release Control Record

Issue No.	Description	Date Issued
RFBARR-WTW-P23110067-4	Original release.	2024/2/23

1 Certificate

Product: 2TX 11be (WiFi7) BW160 + BT/BLE Combo Card

Brand: MediaTek

Test Model: MT7925B14L

Sample Status: Engineering sample

Applicant: MediaTek Inc.

Test Date: 2023/11/14 ~ 2024/1/22

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure: KDB 291074 D02 EMC Measurement v01

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -11.09 dB at 0.16562 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -0.6 dB at 214.32 MHz
15.407(b)(5) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.05 dB at 5895 MHz
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	1050.00 Hz
Frequency Stability	-	0.16 ppm
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	2TX 11be (WiFi7) BW160 + BT/BLE Combo Card
Brand	MediaTek
Test Model	MT7925B14L
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps 802.11be: up to 2882.4 Mbps
Operating Frequency	5.815 GHz ~ 5.885 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 3 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 2 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 1 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 1
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 996-tone + 484-tone + 242-tone
Output Power	1TX: EIRP: 656.146 mW (28.17 dBm) 2TX: EIRP: 941.396 mW (29.74 dBm)
EUT Category	Client device

Note:

1. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 5.9 GHz & 6 GHz) technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (5 GHz) (2TX)	Bluetooth
2	WLAN (5.9 GHz) (2TX)	Bluetooth
3	WLAN (6 GHz) (2TX)	Bluetooth
4	WLAN (2.4 GHz) (1TX)	WLAN (5 GHz) (1TX)
5	WLAN (2.4 GHz) (1TX)	WLAN (5.9 GHz) (1TX)
6	WLAN (2.4 GHz) (1TX)	WLAN (6 GHz) (1TX)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.
4. The EUT support MRU mode is listed as below.

BW	Small size		Large size		
	52+26-tone MRU	106+26-tone MRU	484+242-tone MRU	996+484-tone MRU	996+484+242-tone MRU
20 MHz	v	v	-	-	-
40 MHz	v	v	-	-	-
80 MHz	v	v	v	-	-
160 MHz	v	v	v	v	v

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0	PSA	RFMTA340718EMLB302	3.18 4.92	2.4~2.4835 5.15~5.895	PIFA	i-pex(MHF)	200
	Chain1	PSA	RFMTA340718EMLB302	3.18 4.92	2.4~2.4835 5.15~5.895	PIFA	i-pex(MHF)	200
2	Chain0	PSA	RFMTA311020EMMB301	1.71 4.82 4.76 4.29 4.61 4.09	2.4~2.4835 5.15~5.895 5.925~6.425 6.425~6.525 6.525~6.875 6.875~7.125	PIFA	i-pex(MHF)	200
	Chain1	PSA	RFMTA311020EMMB301	1.71 4.82 4.76 4.29 4.61 4.09	2.4~2.4835 5.15~5.895 5.925~6.425 6.425~6.525 6.525~6.875 6.875~7.125	PIFA	i-pex(MHF)	200
3	Chain0	PSA	RFMTA421230IMMB701	-13.92 -13.91 -13.91 -14.46	5.925~6.425 6.425~6.525 6.525~6.875 6.875~7.125	PIFA	i-pex(MHF)	300
	Chain1	PSA	RFMTA421230IMMB701	-13.92 -13.91 -13.91 -14.46	5.925~6.425 6.425~6.525 6.525~6.875 6.875~7.125	PIFA	i-pex(MHF)	300

Note: Max. gain was selected for the final test.

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band					
Modulation Mode	TX & RX Configuration		CDD Mode	Beamforming Mode	
802.11a	SIMO	1TX (Diversity)	2RX	Not Support	Not Support
802.11n (HT20)		1TX (Diversity)	2RX	Not Support	Not Support
802.11n (HT40)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ac (VHT20)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ac (VHT40)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ac (VHT80)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ac (VHT160)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ax (HE20)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ax (HE40)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ax (HE80)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ax (HE160)		1TX (Diversity)	2RX	Not Support	Not Support
802.11be (EHT20)		1TX (Diversity)	2RX	Not Support	Not Support
802.11be (EHT40)		1TX (Diversity)	2RX	Not Support	Not Support
802.11be (EHT80)		1TX (Diversity)	2RX	Not Support	Not Support
802.11be (EHT160)		1TX (Diversity)	2RX	Not Support	Not Support
802.11ax (RU26/52/106/242/484/996/2x996)		1TX (Diversity)	2RX	Not Support	Not Support
802.11be (RU26/52/106/242/484/996/2x996 MRU52+26/106+26/ 484+242/996+484/996+484+242)		1TX (Diversity)	2RX	Not Support	Not Support
802.11a		MIMO	2TX	2RX	Support
802.11n (HT20)	2TX		2RX	Support NSS2	Not Support
802.11n (HT40)	2TX		2RX	Support NSS2	Not Support
802.11ac (VHT20)	2TX		2RX	Support NSS2	Not Support
802.11ac (VHT40)	2TX		2RX	Support NSS2	Not Support
802.11ac (VHT80)	2TX		2RX	Support NSS2	Not Support
802.11ac (VHT160)	2TX		2RX	Support NSS2	Not Support
802.11ax (HE20)	2TX		2RX	Support NSS2	Not Support
802.11ax (HE40)	2TX		2RX	Support NSS2	Not Support
802.11ax (HE80)	2TX		2RX	Support NSS2	Not Support
802.11ax (HE160)	2TX		2RX	Support NSS2	Not Support
802.11be (EHT20)	2TX		2RX	Support NSS2	Not Support
802.11be (EHT40)	2TX		2RX	Support NSS2	Not Support
802.11be (EHT80)	2TX		2RX	Support NSS2	Not Support
802.11be (EHT160)	2TX		2RX	Support NSS2	Not Support
802.11ax (RU26/52/106/242/484/996/2x996)	2TX		2RX	Support NSS2	Not Support
802.11be (RU26/52/106/242/484/996/2x996 MRU52+26/106+26/ 484+242/996+484/996+484+242)	2TX		2RX	Support NSS2	Not Support

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160 MHz), 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) and 802.11be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz) therefore the manufacturer will control the power for 802.11n/ac/ax mode is same as the 802.11be mode or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

3 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
*169	5845 MHz	173	5865 MHz	177	5885 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
*167	5835 MHz	175	5875 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
*171	5855 MHz

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*163	5815 MHz

Note: * U-NII-3 & -4 span channels.

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<ol style="list-style-type: none"> For 1Tx diversity configuration. Pre-scan in these chain 0 and chain 1 and find the worst case as a representative test condition. The worst-case Partial RU modes across all supported bandwidth modes has been determined via pre-scan. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rates.
Worst Case:	<ol style="list-style-type: none"> For 1Tx diversity configuration the worst chain is: Chain 0 The worst case occurs in 20 MHz bandwidth (RU 26/52/106).

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
RF Output Power	A	802.11a	1TX / 2TX	169, 173, 177	BPSK	6Mb/s	NA
		802.11ac (VHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11ac (VHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11ac (VHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11ac (VHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11ax (HE20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11ax (HE40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11ax (HE80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11ax (HE160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1		

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
6 dB Bandwidth	A	802.11a	1TX / 2TX	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1
Power Spectral Density	A	802.11a	1TX / 2TX	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1



Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
Frequency Stability	A	-	-	169	unmodulated	-	-
AC Power Conducted Emissions	C	802.11be (EHT40)	1TX	167	BPSK	MCS0	NA
			2TX	175	BPSK	MCS0	NA
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT40)	1TX	167	BPSK	MCS0	NA
			2TX	175	BPSK	MCS0	NA
Unwanted Emissions above 1 GHz	A, B	802.11a	1TX / 2TX	169, 173, 177	BPSK	6Mb/s	NA
		802.11be (EHT20)	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	NA
		802.11be (EHT40)	1S1T / 2S2T	167, 175	BPSK	MCS0	NA
		802.11be (EHT80)	1S1T / 2S2T	171	BPSK	MCS0	NA
		802.11be (EHT160)	1S1T / 2S2T	163	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	53, 53, 54
		802.11be (EHT20) 52+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	70, 70, 72
		802.11be (EHT20) 106+26-tone MRU	1S1T / 2S2T	169, 173, 177	BPSK	MCS0	82, 82, 83
		802.11be (EHT80) 484+242-tone MRU	1S1T / 2S2T	171	BPSK	MCS0	90
		802.11be (EHT160) 996+484-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	95-1
		802.11be (EHT160) 996+484+242-tone MRU	1S1T / 2S2T	163	BPSK	MCS0	99-1
EUT Configure Mode:	A	EUT only (remove 50 ohm terminator and Connect to the appropriate equipment)					
	B	EUT with 50 ohm terminator					
	C	EUT with antenna					

Note: Channel puncturing mechanism is not supported.

3.5 Duty Cycle of Test Signal

802.11a 1TX:

Duty cycle = 2.014 ms / 3.298 ms x 100% = 61.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.14$ dB

802.11ac (VHT20) 1S1T:

Duty cycle = 5.175 ms / 6.46 ms x 100% = 80.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.96$ dB

802.11ac (VHT40) 1S1T:

Duty cycle = 4.985 ms / 6.265 ms x 100% = 79.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.99$ dB

802.11ac (VHT80) 1S1T:

Duty cycle = 2.33 ms / 2.997 ms x 100% = 77.7%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.09$ dB

802.11ac (VHT160) 1S1T:

Duty cycle = 2.131 ms / 2.625 ms x 100% = 81.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.91$ dB

802.11ax (HE20) 1S1T:

Duty cycle = 3.935 ms / 5.205 ms x 100% = 75.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.21$ dB

802.11ax (HE40) 1S1T:

Duty cycle = 3.95 ms / 5.235 ms x 100% = 75.5%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.22$ dB

802.11ax (HE80) 1S1T:

Duty cycle = 1.926 ms / 2.605 ms x 100% = 73.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.31$ dB

802.11ax (HE160) 1S1T:

Duty cycle = 1.756 ms / 2.25 ms x 100% = 78.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.08$ dB

802.11be (EHT20) 1S1T:

Duty cycle = 4.63 ms / 5.905 ms x 100% = 78.4%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.06$ dB

802.11be (EHT40) 1S1T:

Duty cycle = 4.625 ms / 5.915 ms x 100% = 78.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.07$ dB

802.11be (EHT80) 1S1T:

Duty cycle = 2.262 ms / 2.933 ms x 100% = 77.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.13$ dB

802.11be (EHT160) 1S1T:

Duty cycle = 2.077 ms / 2.571 ms x 100% = 80.8%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.93$ dB

802.11be (EHT20) 26-tone RU 1S1T:

Duty cycle = 1.601 ms / 1.711 ms x 100% = 93.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.29$ dB

802.11be (EHT20) 52-tone RU 1S1T:

Duty cycle = 1.601 ms / 1.711 ms x 100% = 93.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.29$ dB

802.11be (EHT20) 106-tone RU 1S1T:

Duty cycle = 1.601 ms / 1.711 ms x 100% = 93.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.29$ dB

802.11be (EHT20) 52+26-tone MRU 1S1T:

Duty cycle = 1.495 ms / 1.607 ms x 100% = 93.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.31$ dB

802.11be (EHT20) 106+26-tone MRU 1S1T:

Duty cycle = 1.663 ms / 1.773 ms x 100% = 93.8%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.28$ dB

802.11be (EHT80) 484+242-tone MRU 1S1T:

Duty cycle = 1.199 ms / 1.308 ms x 100% = 91.7%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.38$ dB

802.11be (EHT160) 996+484-tone MRU 1S1T:

Duty cycle = 1.16 ms / 1.27 ms x 100% = 91.3%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.39$ dB

802.11be (EHT160) 996+484+242-tone MRU 1S1T:

Duty cycle = 1.167 ms / 1.283 ms x 100% = 91.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.41$ dB

802.11a 2TX:

Duty cycle = 2.014 ms / 3.298 ms x 100% = 61.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.14 \text{ dB}$

802.11ac (VHT20) 2S2T:

Duty cycle = 5.175 ms / 6.46 ms x 100% = 80.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.96 \text{ dB}$

802.11ac (VHT40) 2S2T:

Duty cycle = 4.985 ms / 6.265 ms x 100% = 79.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.99 \text{ dB}$

802.11ac (VHT80) 2S2T:

Duty cycle = 2.33 ms / 2.997 ms x 100% = 77.7%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.09 \text{ dB}$

802.11ac (VHT160) 2S2T:

Duty cycle = 2.131 ms / 2.625 ms x 100% = 81.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.91 \text{ dB}$

802.11ax (HE20) 2S2T:

Duty cycle = 3.935 ms / 5.205 ms x 100% = 75.6%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.21 \text{ dB}$

802.11ax (HE40) 2S2T:

Duty cycle = 3.95 ms / 5.235 ms x 100% = 75.5%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.22 \text{ dB}$

802.11ax (HE80) 2S2T:

Duty cycle = 1.926 ms / 2.605 ms x 100% = 73.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.31 \text{ dB}$

802.11ax (HE160) 2S2T:

Duty cycle = 1.756 ms / 2.25 ms x 100% = 78.0%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.08 \text{ dB}$

802.11be (EHT20) 2S2T:

Duty cycle = 4.63 ms / 5.905 ms x 100% = 78.4%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.06 \text{ dB}$

802.11be (EHT40) 2S2T:

Duty cycle = 4.625 ms / 5.915 ms x 100% = 78.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.07 \text{ dB}$

802.11be (EHT80) 2S2T:

Duty cycle = 2.262 ms / 2.933 ms x 100% = 77.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 1.13 \text{ dB}$

802.11be (EHT160) 2S2T:

Duty cycle = 2.077 ms / 2.571 ms x 100% = 80.8%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.93 \text{ dB}$

802.11be (EHT20) 26-tone RU 2S2T:

Duty cycle = 0.853 ms / 0.97 ms x 100% = 87.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.56 \text{ dB}$

802.11be (EHT20) 52-tone RU 2S2T:

Duty cycle = 0.853 ms / 0.97 ms x 100% = 87.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.56 \text{ dB}$

802.11be (EHT20) 106-tone RU 2S2T:

Duty cycle = 0.853 ms / 0.97 ms x 100% = 87.9%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.56 \text{ dB}$

802.11be (EHT20) 52+26-tone MRU 2S2T:

Duty cycle = 0.802 ms / 0.919 ms x 100% = 87.3%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.59 \text{ dB}$

802.11be (EHT20) 106+26-tone MRU 2S2T:

Duty cycle = 0.883 ms / 0.991 ms x 100% = 89.1%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.50 \text{ dB}$

802.11be (EHT80) 484+242-tone MRU 2S2T:

Duty cycle = 0.651 ms / 0.759 ms x 100% = 85.8%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.67 \text{ dB}$

802.11be (EHT160) 996+484-tone MRU 2S2T:


Duty cycle = 0.635 ms / 0.745 ms x 100% = 85.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.69 \text{ dB}$

802.11be (EHT160) 996+484+242-tone MRU 2S2T:


Duty cycle = 0.633 ms / 0.752 ms x 100% = 84.2%, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.75 \text{ dB}$




BUREAU VERITAS

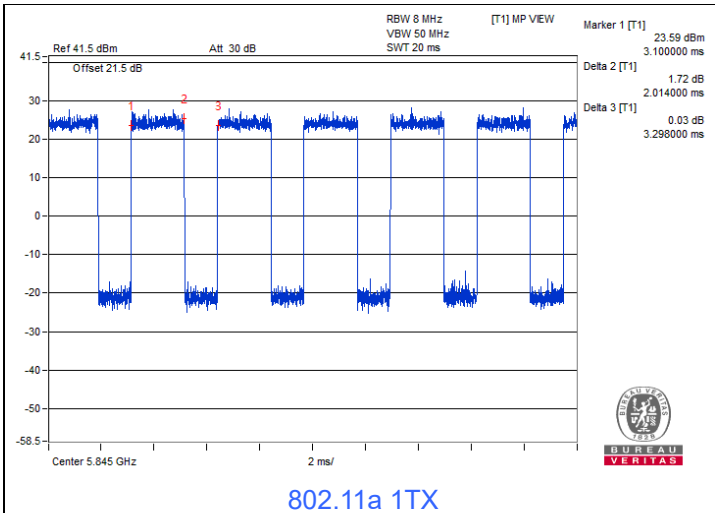


802.11a 1TX

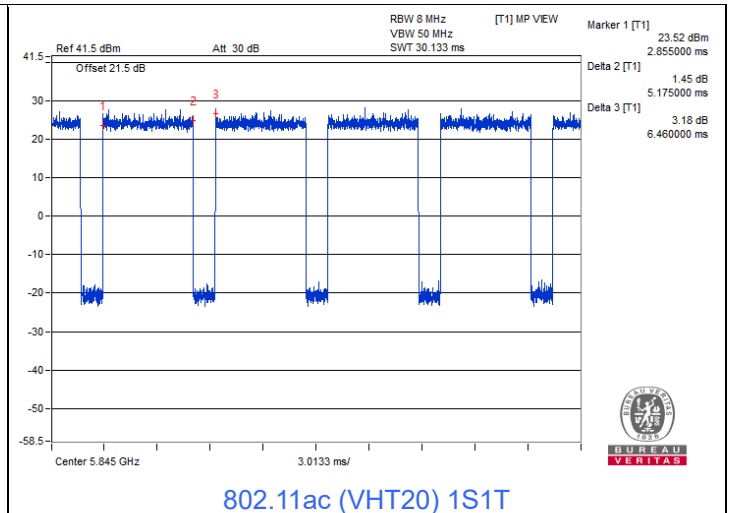


802.11ac (VHT20) 1S1T

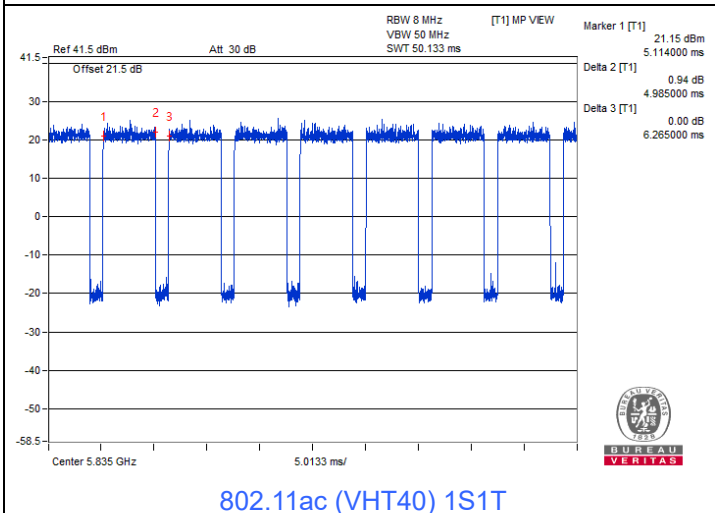


802.11ac (VHT40) 1S1T

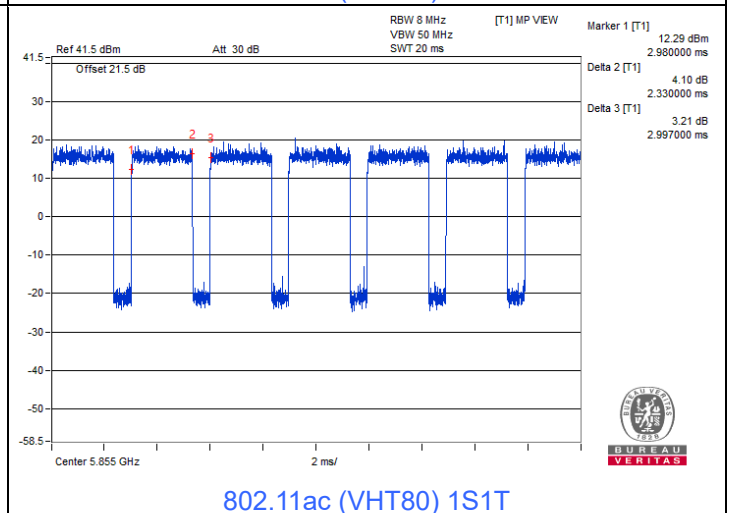

802.11ac (VHT80) 1S1T

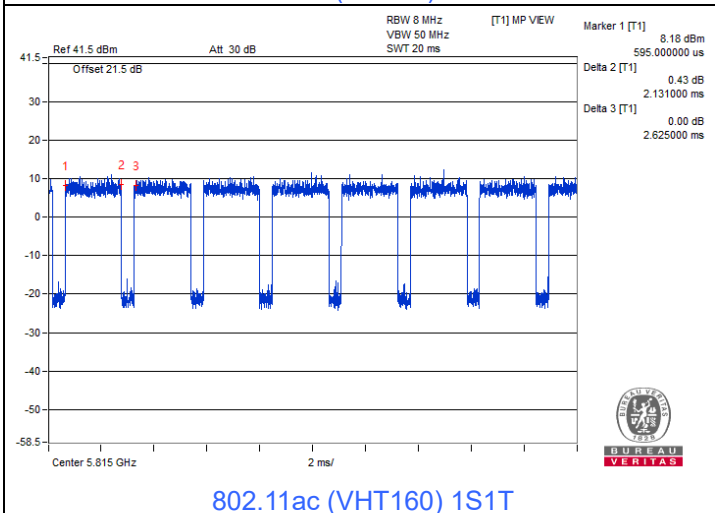


802.11ac (VHT160) 1S1T

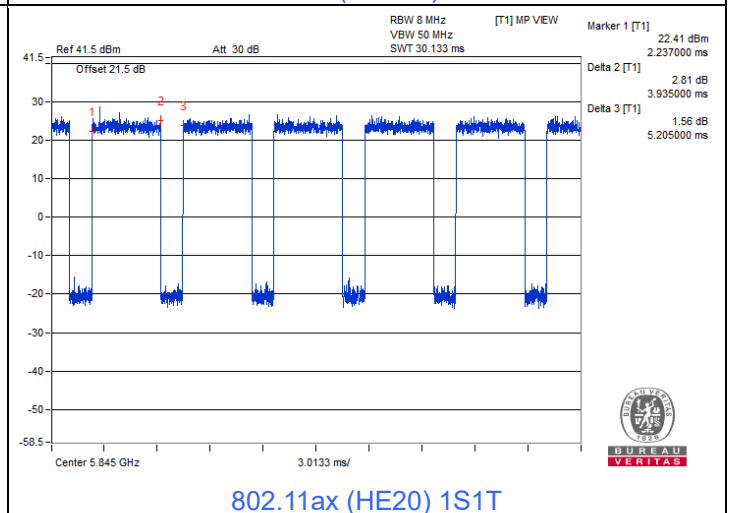


802.11ax (HE20) 1S1T




BUREAU VERITAS

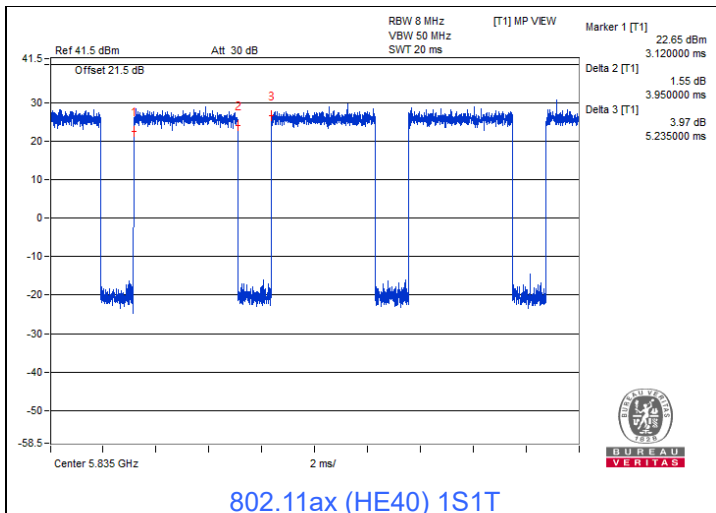


802.11ax (HE40) 1S1T

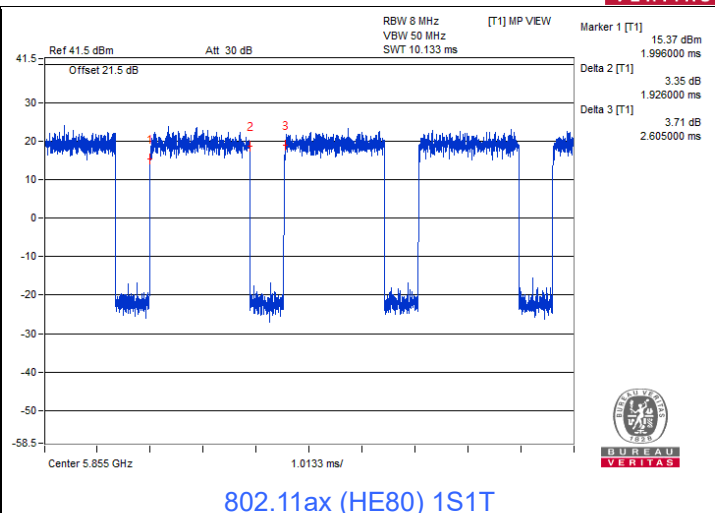


802.11ax (HE80) 1S1T

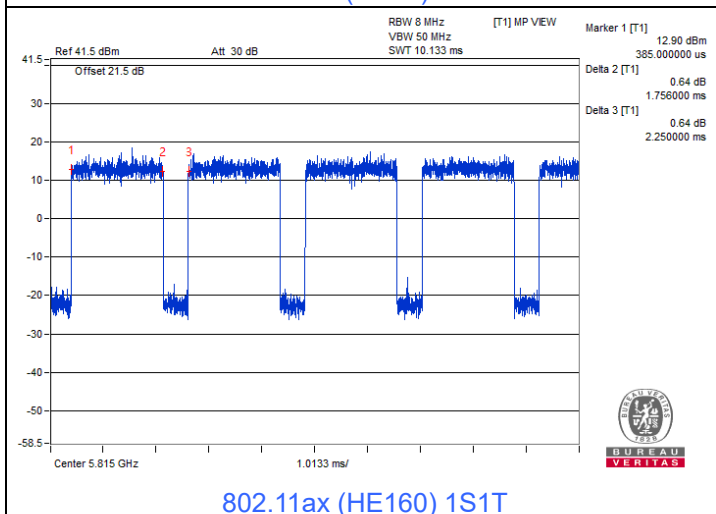


802.11ax (HE160) 1S1T

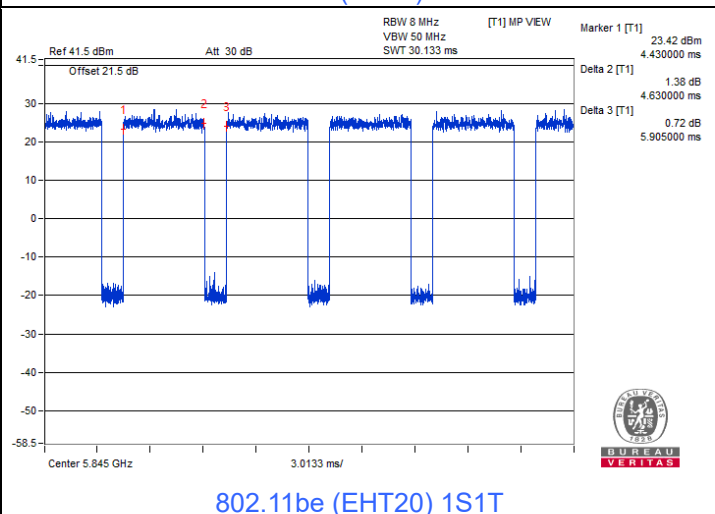


802.11be (EHT20) 1S1T

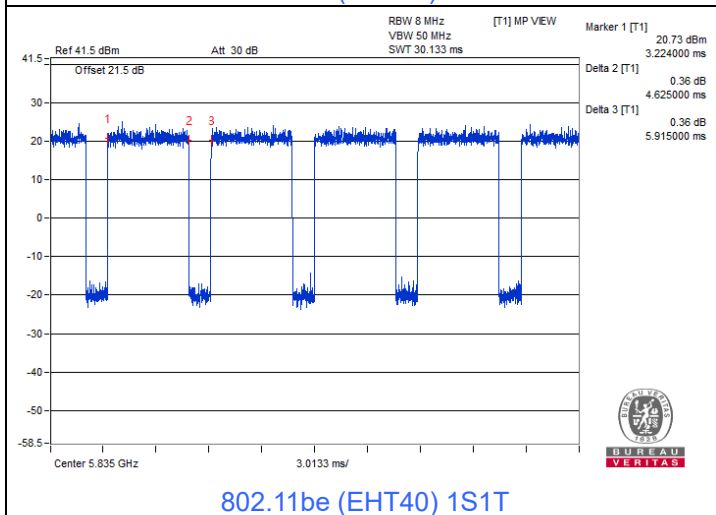


802.11be (EHT40) 1S1T

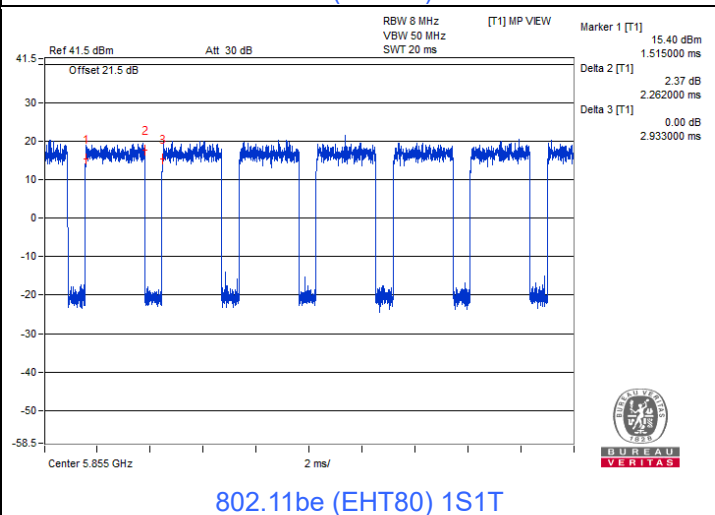


802.11be (EHT80) 1S1T

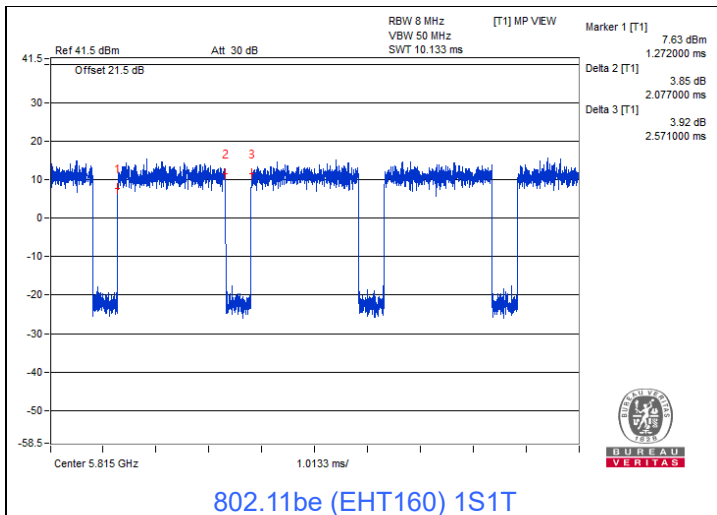


802.11be (EHT160) 1S1T

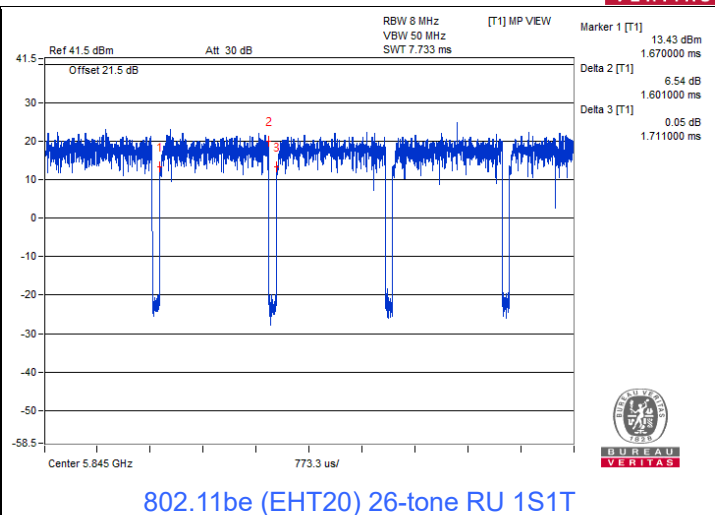


802.11be (EHT20) 26-tone RU 1S1T

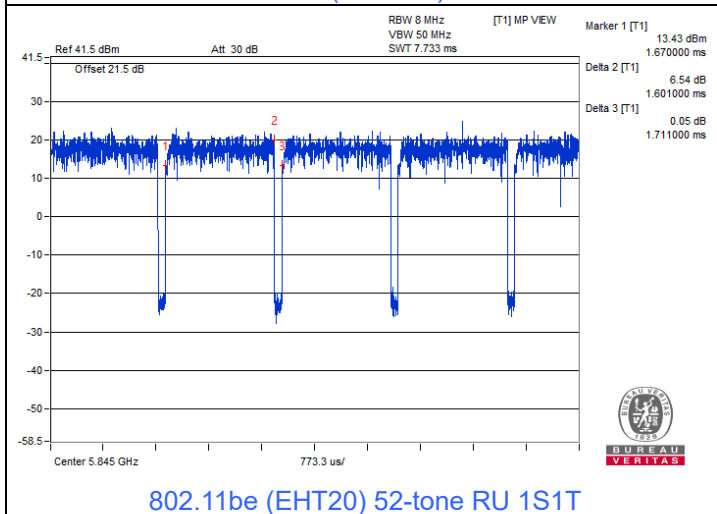


802.11be (EHT20) 52-tone RU 1S1T

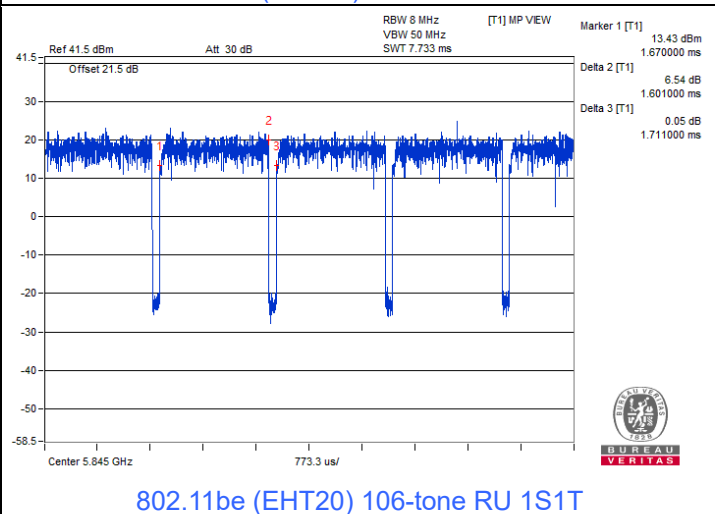

802.11be (EHT20) 106-tone RU 1S1T

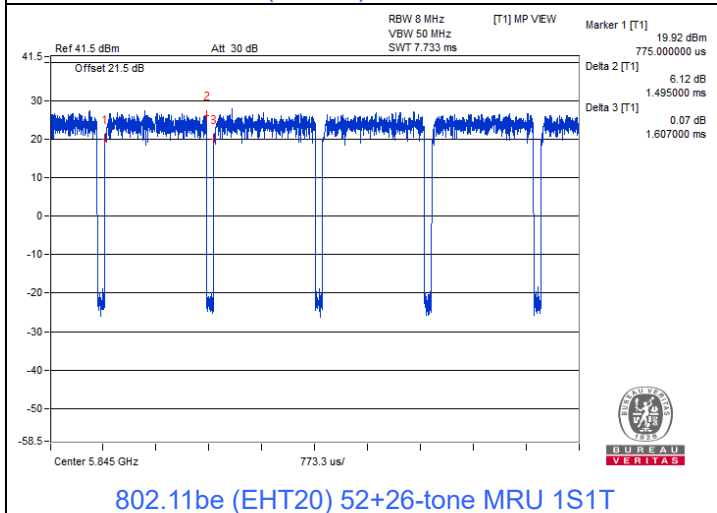


802.11be (EHT20) 52+26-tone MRU 1S1T

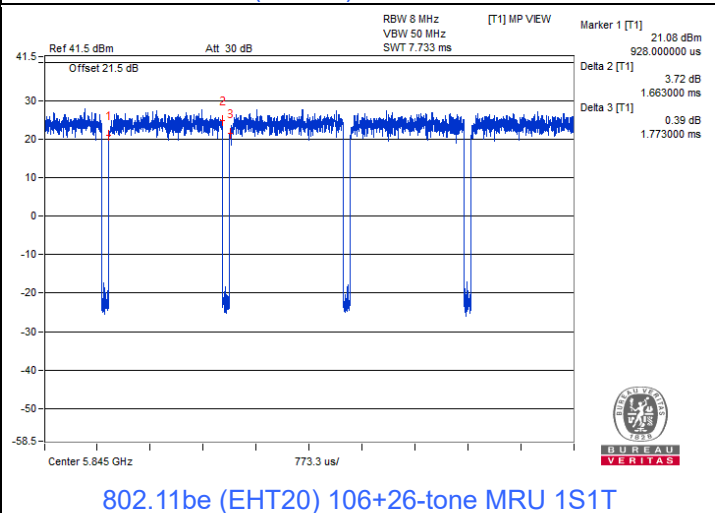


802.11be (EHT20) 106+26-tone MRU 1S1T




BUREAU VERITAS

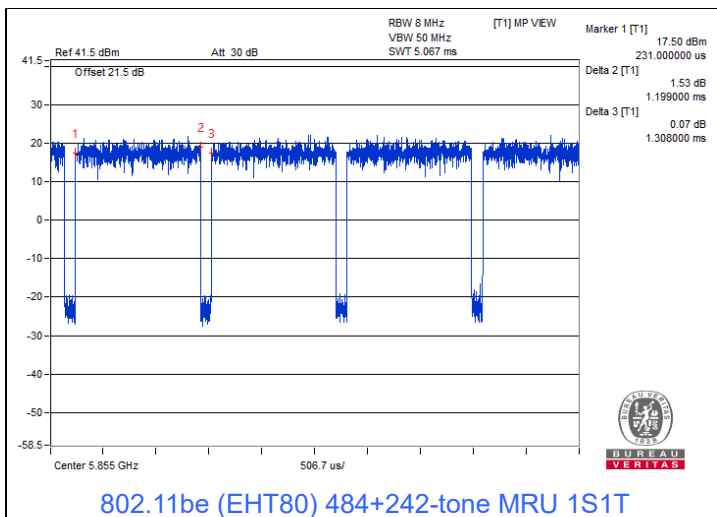


802.11be (EHT80) 484+242-tone MRU 1S1T

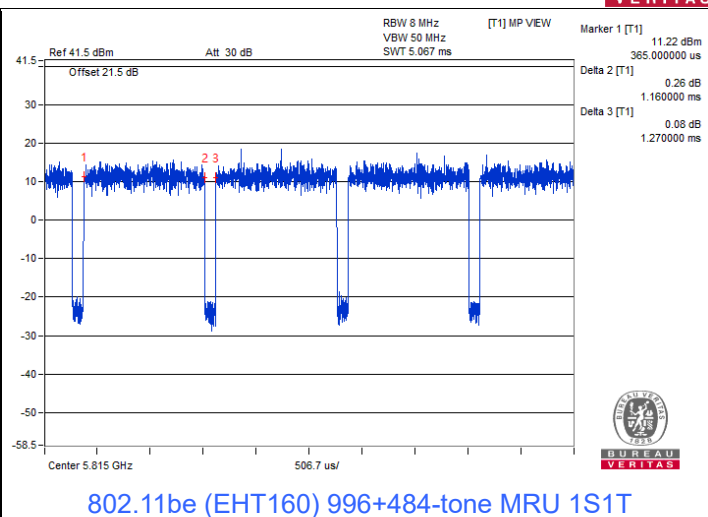


802.11be (EHT160) 996+484-tone MRU 1S1T

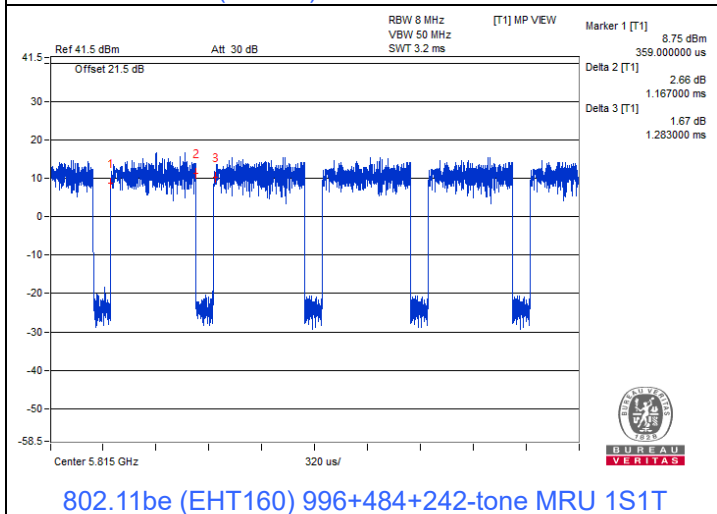


802.11be (EHT160) 996+484+242-tone MRU 1S1T

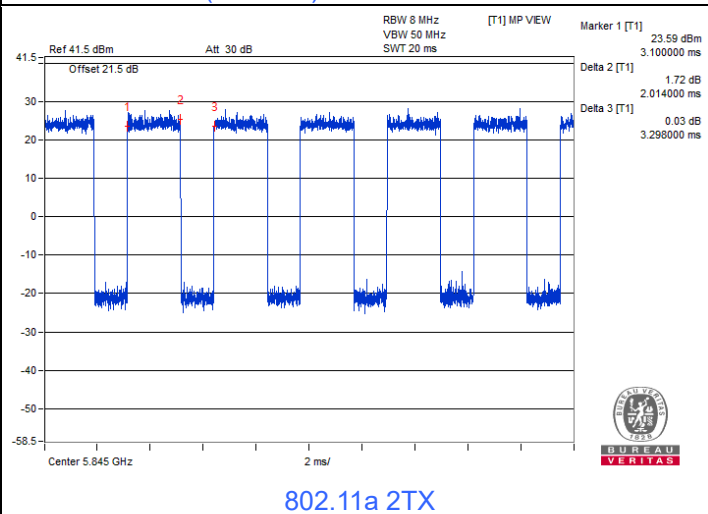

802.11a 2TX

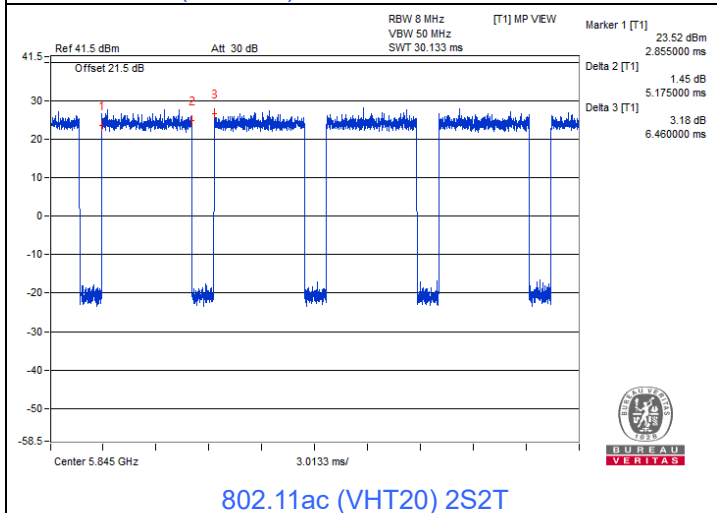


802.11ac (VHT20) 2S2T

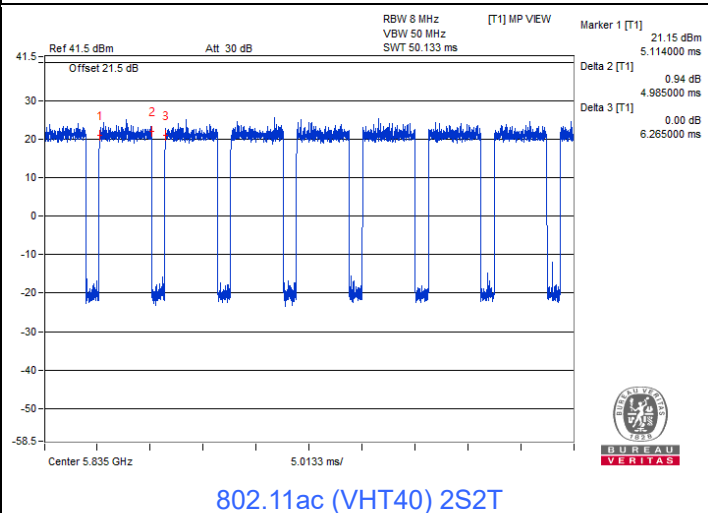


802.11ac (VHT40) 2S2T




BUREAU
VERITAS

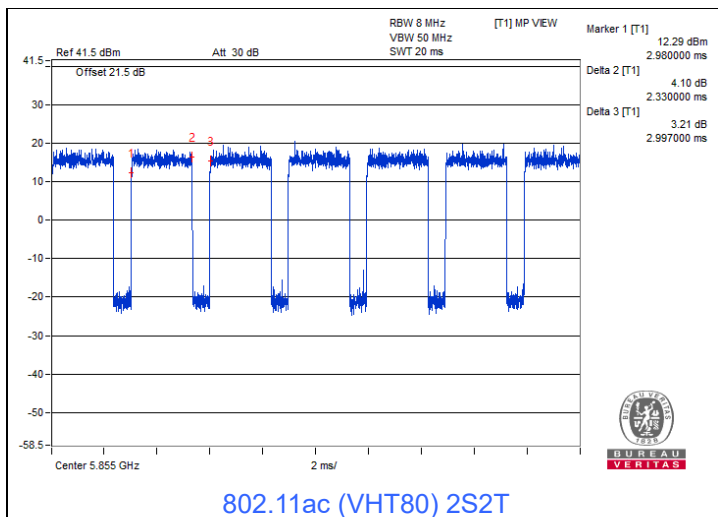


802.11ac (VHT80) 2S2T

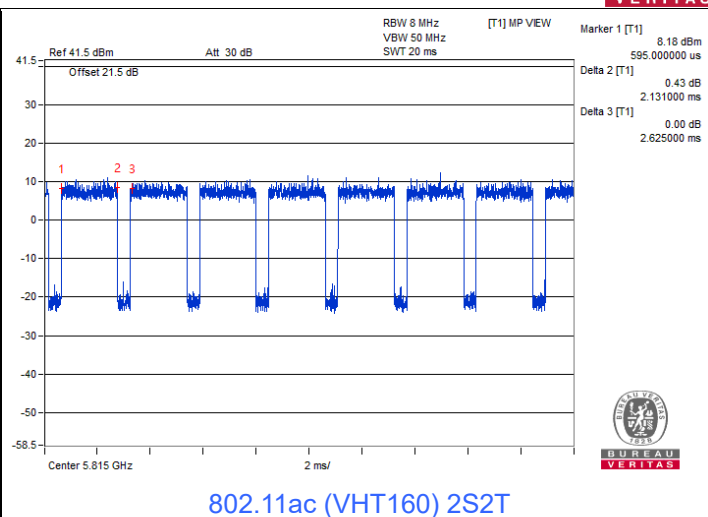


802.11ac (VHT160) 2S2T

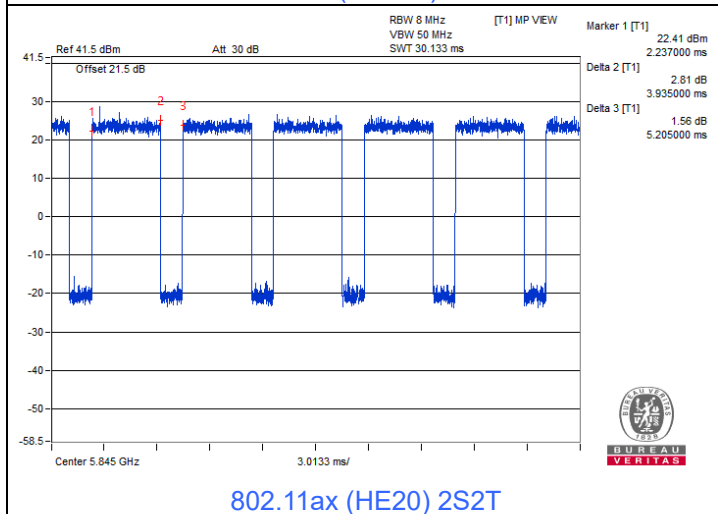


802.11ax (HE20) 2S2T

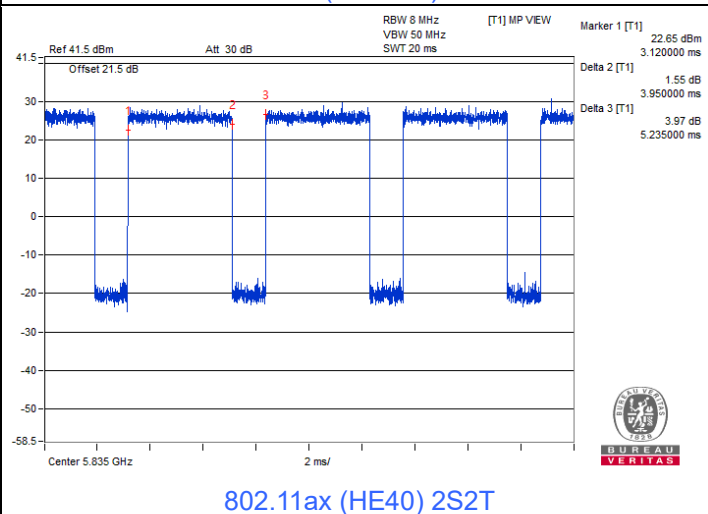


802.11ax (HE40) 2S2T

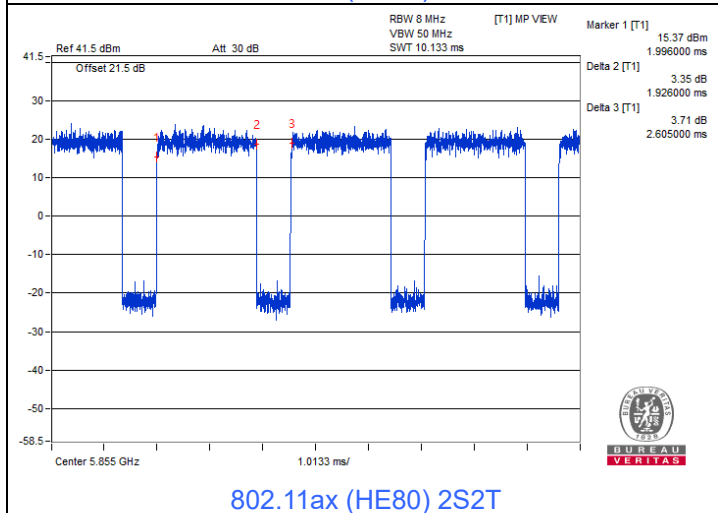


802.11ax (HE80) 2S2T

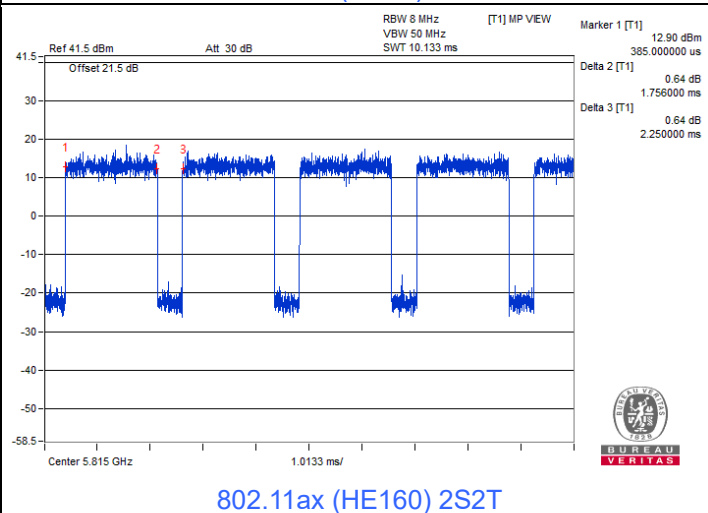


802.11ax (HE160) 2S2T

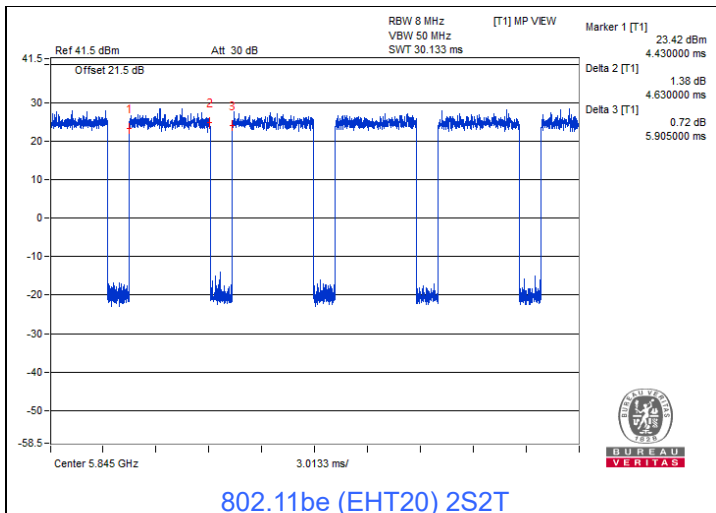


802.11be (EHT20) 2S2T

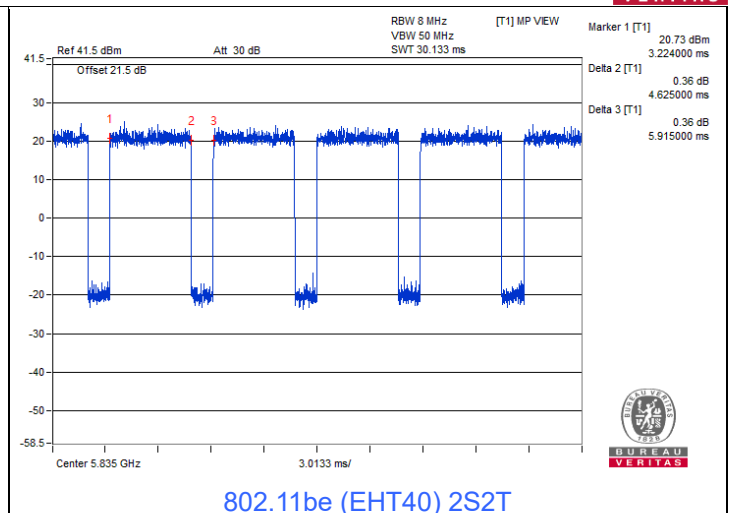


802.11be (EHT40) 2S2T

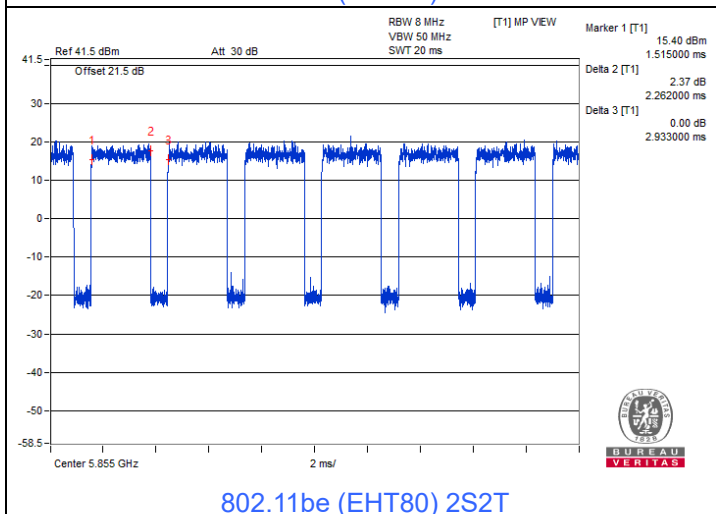


802.11be (EHT80) 2S2T

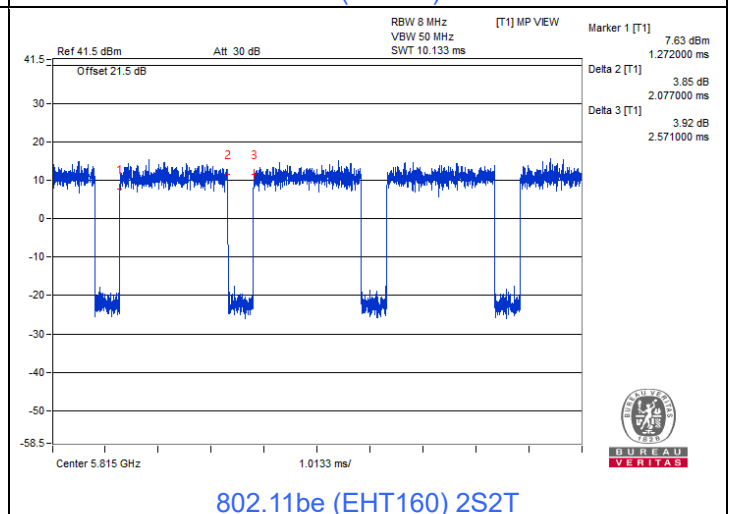


802.11be (EHT160) 2S2T

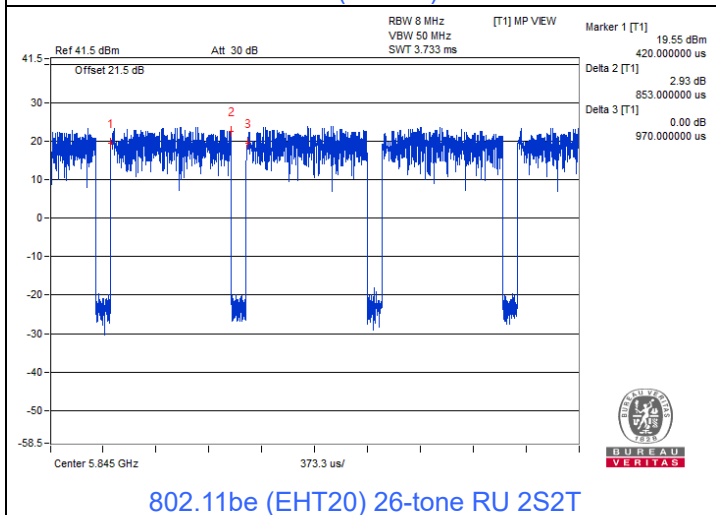


802.11be (EHT20) 26-tone RU 2S2T

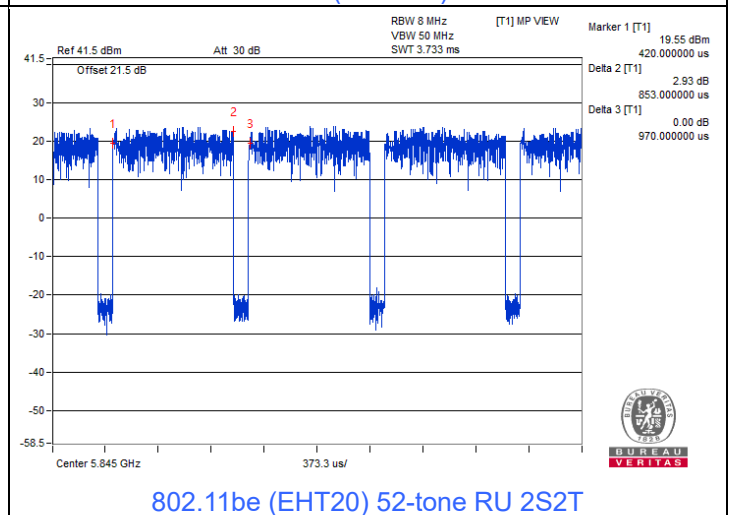


802.11be (EHT20) 52-tone RU 2S2T

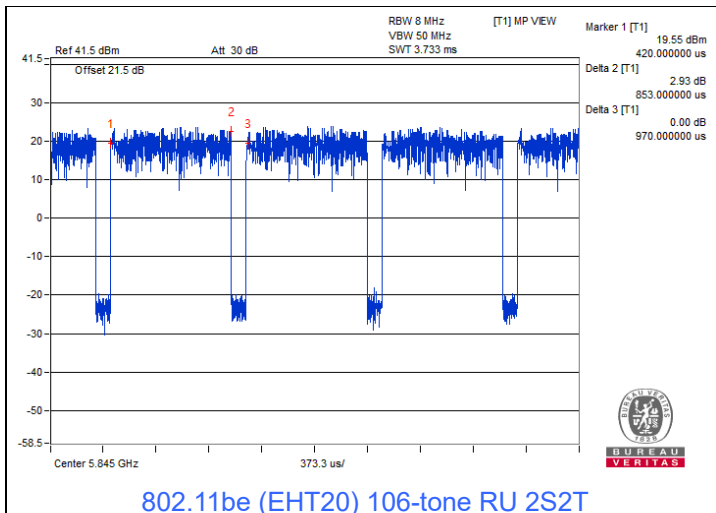


802.11be (EHT20) 106-tone RU 2S2T

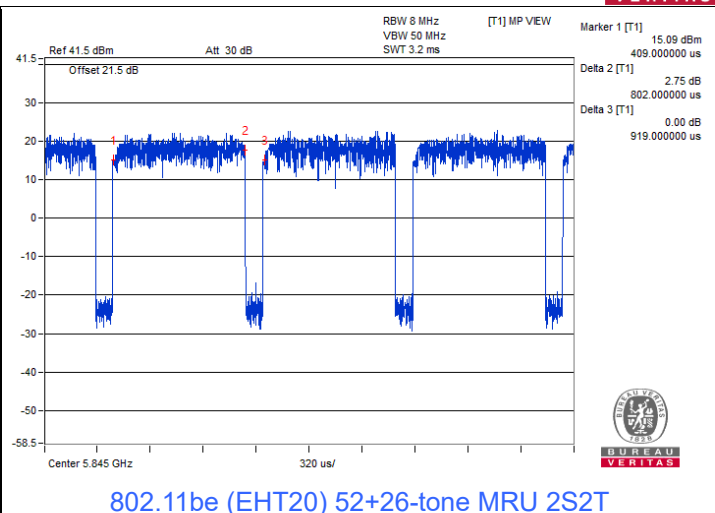


802.11be (EHT20) 52+26-tone MRU 2S2T

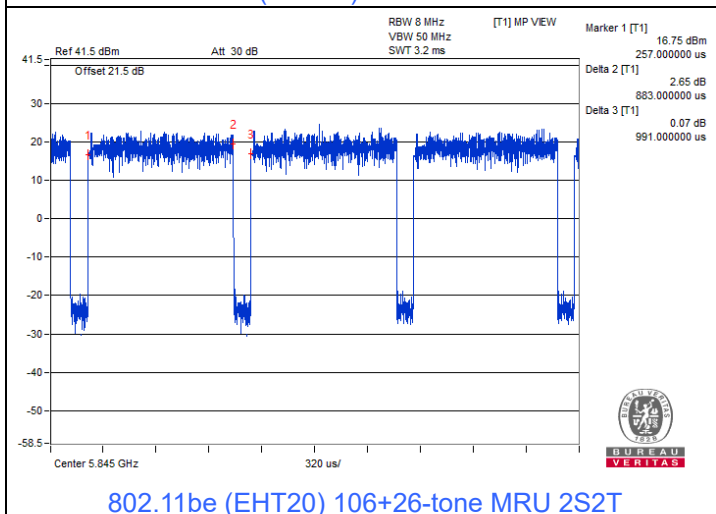


802.11be (EHT20) 106+26-tone MRU 2S2T

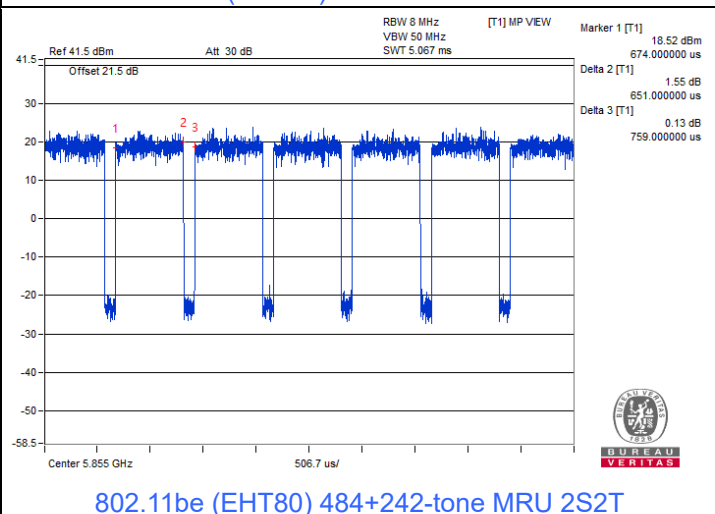

802.11be (EHT80) 484+242-tone MRU 2S2T

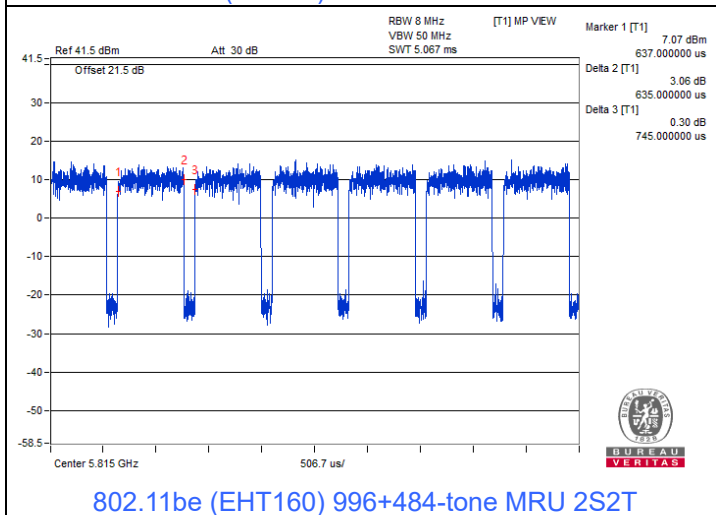

802.11be (EHT160) 996+484-tone MRU 2S2T

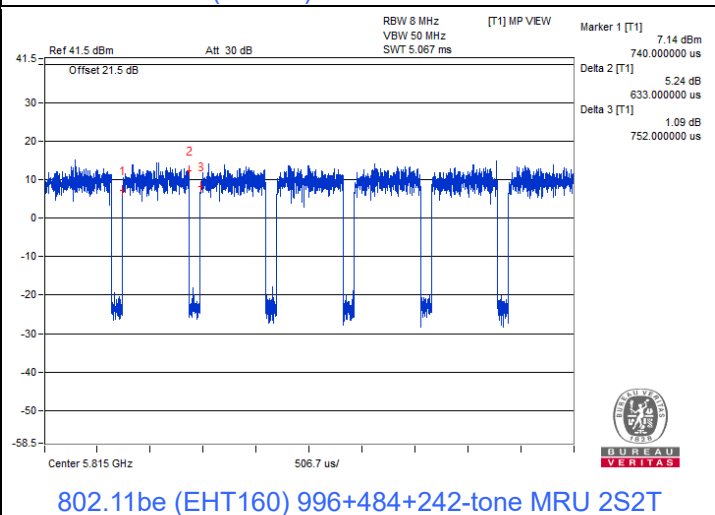


802.11be (EHT160) 996+484+242-tone MRU 2S2T

3.6 Test Program Used and Operation Descriptions


Controlling software (QAtool_V16 (0.0.2.104)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For AC Power Conducted Emission test

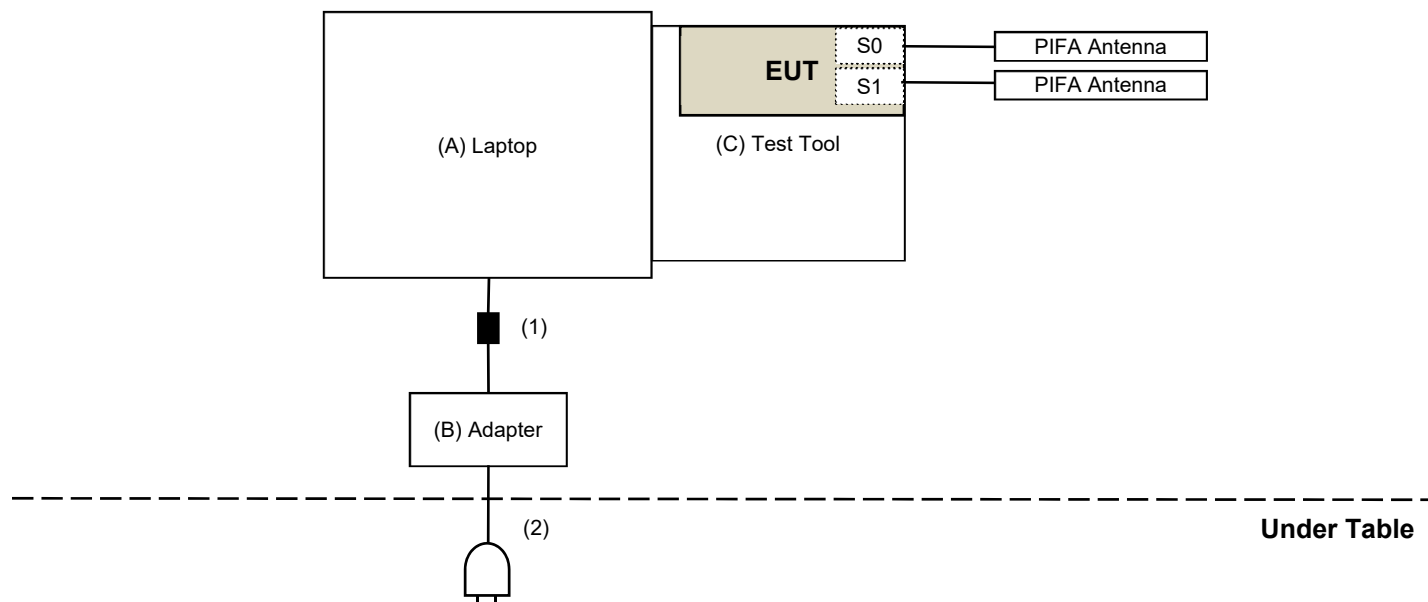

For Unwanted Emission test

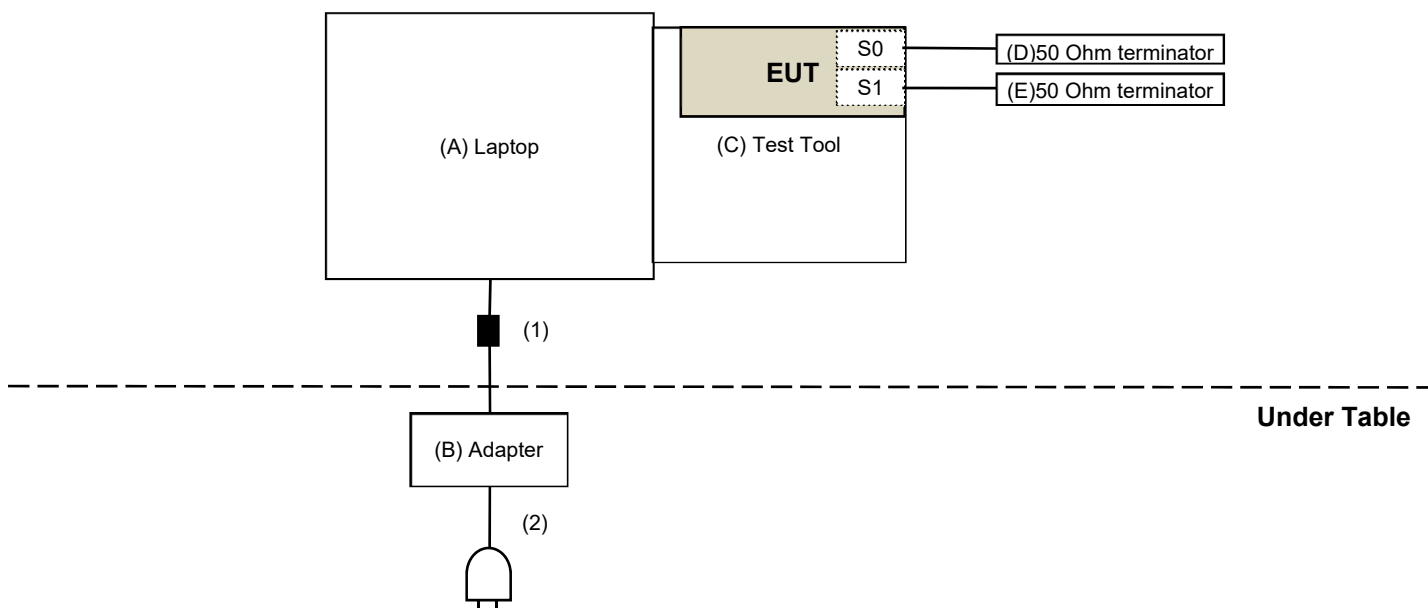

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	E5430	HYV4VY1	DoC	Provided by Lab
B	Adapter	DELL	LLA65NS2-01	N/A	N/A	Provided by Lab
C	Test Tool	Mediatek	MTK1849	N/A	N/A	Supplied by applicant
D	50 Ohm terminator	WOKEN	WTER-18S2	N/A	N/A	Provided by Lab
E	50 Ohm terminator	WOKEN	WTER-18S2	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	1529002	2023/6/17	2024/6/16
Pulse Power Sensor Anritsu	MA2411B	1726434	2023/6/19	2024/6/18

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/11/20 ~ 2024/1/9

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/11/20 ~ 2024/1/9

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
DC Power Supply Topward	6603D	795558	N/A	N/A
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/12/26 2023/12/20	2023/12/25 2024/12/19
True RMS Clamp Meter FLUKE	325	31130711WS	2023/6/8	2024/6/7

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/11/20 ~ 2024/1/9

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2023/10/20	2024/10/19
EMI Test Receiver R&S	ESCS 30	847124/029	2023/10/18	2024/10/17
Fixed Attenuator STI	STI02-2200-10	005	2023/7/1	2024/6/30
LISN R&S	ESH3-Z5	835239/001	2023/4/6	2024/4/5
		848773/004	2023/10/13	2024/10/12
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2023/7/1	2024/6/30
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2024/1/15

4.6 Unwanted Emissions below 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/1/22

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2023/10/13	2024/10/12
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2023/12/12	2024/12/11
Loop Antenna Electro-Metrics	EM-6879	264	2023/2/21	2024/2/20
MXA Signal Analyzer Keysight	N9020B	MY60112408	2023/3/6	2024/3/5
MXE EMI Receiver Keysight	N9038A	MY59050100	2023/6/13	2024/6/12
Preamplifier EMCI	EMC330N	980701	2023/2/18	2024/2/17
	EMC001340	980142	2023/5/8	2024/5/7
RF Coaxial Cable JYBAO	5D-FB	LOOPCAB-001	2023/12/12	2024/12/11
		LOOPCAB-002	2023/12/12	2024/12/11
RF Coaxial Cable PEWC	8D	966-4-1	2023/2/18	2024/2/17
		966-4-2	2023/2/18	2024/2/17
		966-4-3	2023/2/18	2024/2/17
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2024/1/15

4.7 Unwanted Emissions above 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/11/14 ~ 2023/12/18

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-783	2023/11/12	2024/11/11
	BBHA 9170	9170-739	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60112408	2023/3/6	2024/3/5
Preamplifier EMCI	EMC12630SE	980688	2023/10/3	2024/10/2
	EMC184045SE	980387	2023/8/9	2024/8/8
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2023/2/20	2024/2/19
	EMC102-KM-KM-1200	160924	2023/8/9	2024/8/8
	EMC104-SM-SM-1200	160922	2023/8/9	2024/8/8
	EMC104-SM-SM-2000	180502	2023/3/27	2024/3/26
	EMC104-SM-SM-6000	210704	2023/11/2	2024/11/1
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2024/1/6 ~ 2024/1/12

5 Limits of Test Items

5.1 RF Output Power

Device Category	Limit (Max Average Power)
Indoor access point	EIRP 36 dBm
Subordinate device	EIRP 36 dBm
Client device	EIRP 30 dBm

Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Device Category	Limit
Indoor access point	EIRP 20 dBm/MHz
Subordinate device	EIRP 20 dBm/MHz
Client device	EIRP 14 dBm/MHz

Note: For all U-NII-4 and U-NII-3 & -4 span channels shall met above EIRP values.

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

- (i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
- (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.
- (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

Note:


The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure


For specified measurement bandwidth 1 MHz:

Method SA-2

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- c. Sweep points \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- d. Sweep time = auto, trigger set to "free run".
- e. Trace average at least 100 traces in power averaging mode.
- f. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- g. Record the max value and add $10 \log (1/\text{duty cycle})$.

6.3 6 dB Bandwidth

6.3.1 Test Setup

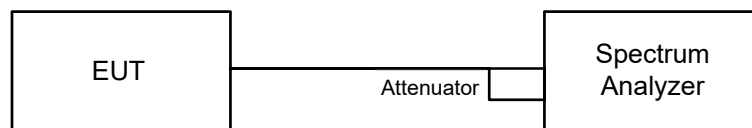


6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Frequency Stability

6.4.1 Test Setup

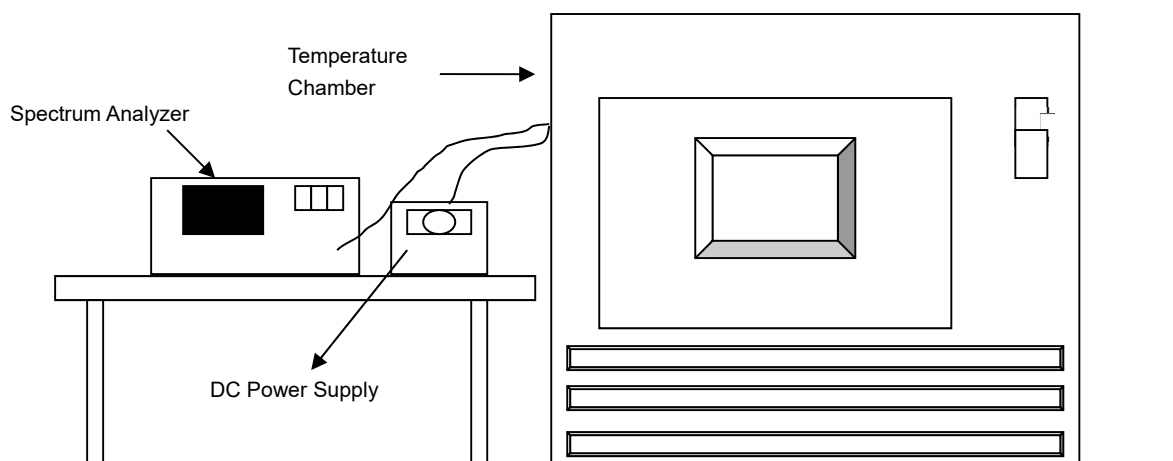


6.4.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

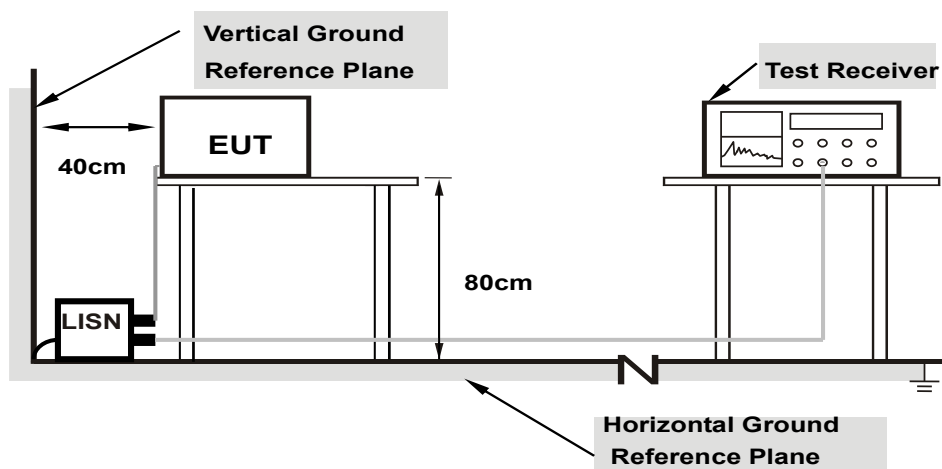

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

6.6 Unwanted Emissions below 1 GHz


6.6.1 Test Setup

For Radiated Configuration:


For Radiated emission below 30 MHz

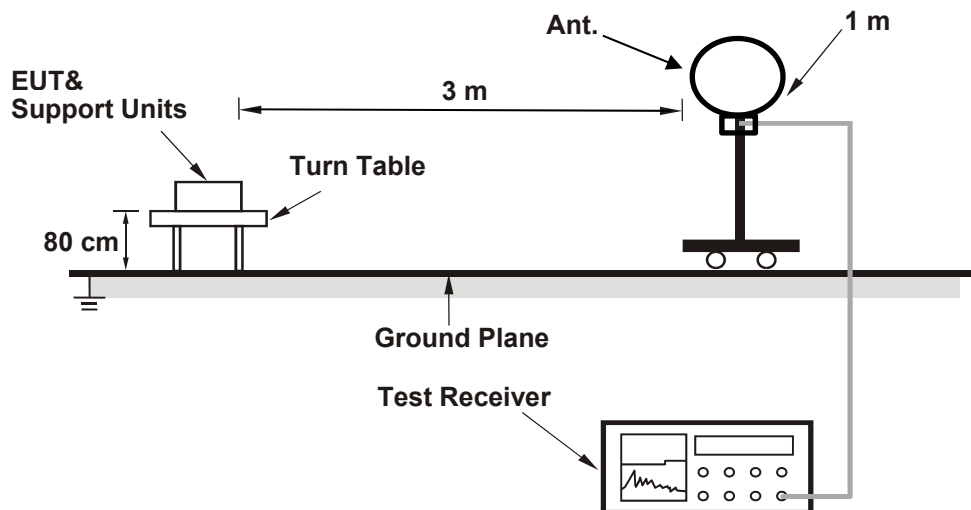

For Radiated emission above 30 MHz

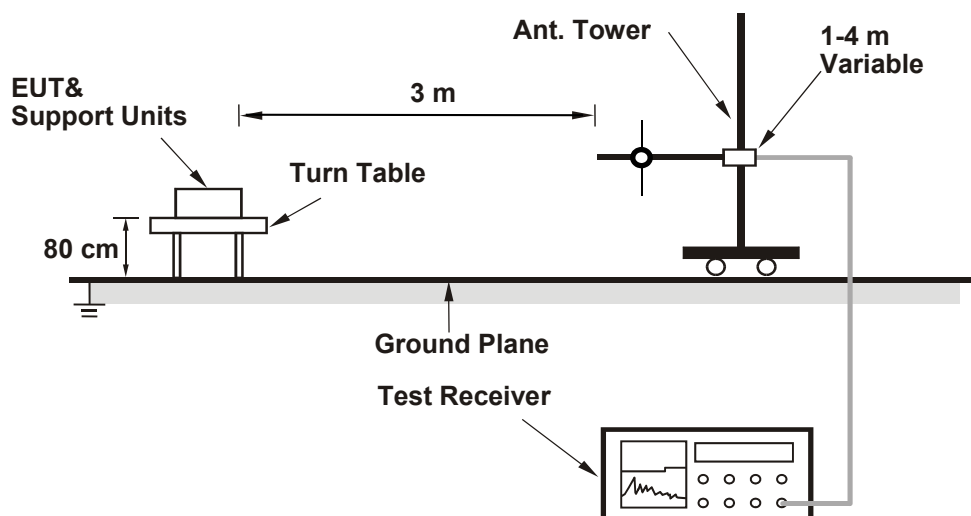

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30 MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Unwanted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
For the band edge the gain for the specific band may have been used.


Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
For frequencies between 30 MHz and 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.


6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

For Radiated Configuration:

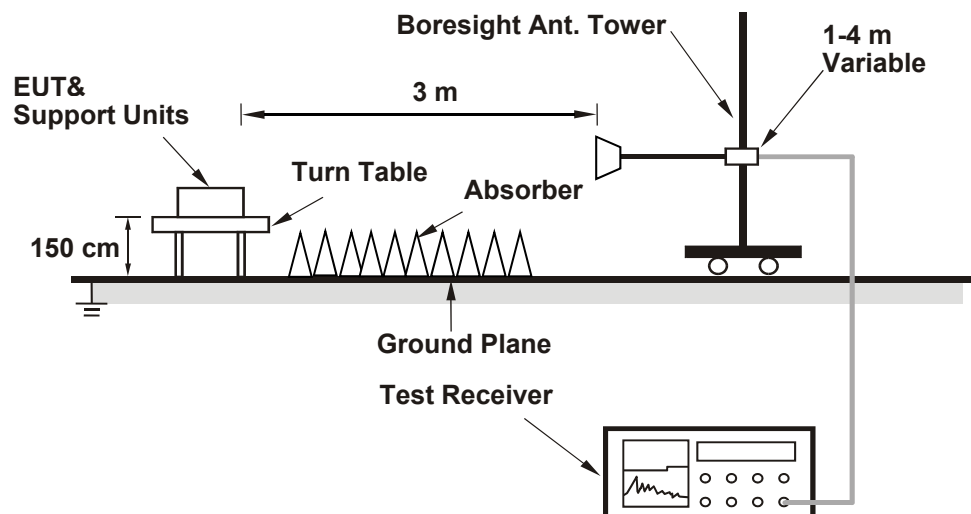

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test
 - e-1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
 - e-2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

- e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-5. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement
<p><u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).</p> <p><u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).</p> <p><u>For Verified radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).</p>
Conducted Unwanted Emission Convert Formula
<p>a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters.</p> <p>b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB).</p> <p>c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used.</p> <p>Note: The conducted emission test was considered some factor to compute test result.</p>

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1TX

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	113.501	20.55	4.92	352.371	25.47	30	Pass
173	5865	112.202	20.50	4.92	348.338	25.42	30	Pass
177	5885	114.025	20.57	4.92	353.997	25.49	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ac (VHT20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	112.202	20.50	4.92	348.338	25.42	30	Pass
173	5865	112.98	20.53	4.92	350.753	25.45	30	Pass
177	5885	111.429	20.47	4.92	345.938	25.39	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ac (VHT40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	206.538	23.15	4.92	641.21	28.07	30	Pass
175	5875	200.447	23.02	4.92	622.3	27.94	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ac (VHT80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	141.906	21.52	4.92	440.556	26.44	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ac (VHT160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	79.25	18.99	4.92	246.036	23.91	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ax (HE20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	115.345	20.62	4.92	358.095	25.54	30	Pass
173	5865	125.026	20.97	4.92	388.151	25.89	30	Pass
177	5885	62.661	17.97	4.92	194.535	22.89	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ax (HE40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	208.449	23.19	4.92	647.142	28.11	30	Pass
175	5875	206.063	23.14	4.92	639.735	28.06	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ax (HE80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	143.219	21.56	4.92	444.632	26.48	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11ax (HE160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	81.283	19.10	4.92	252.348	24.02	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	129.42	21.12	4.92	401.792	26.04	30	Pass
173	5865	128.233	21.08	4.92	398.107	26	30	Pass
177	5885	64.417	18.09	4.92	199.986	23.01	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT40) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
167	5835	211.349	23.25	4.92	656.146	28.17	30	Pass
175	5875	207.014	23.16	4.92	642.687	28.08	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT80) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	144.877	21.61	4.92	449.779	26.53	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	82.035	19.14	4.92	254.683	24.06	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 26-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	22.646	13.55	4.92	70.306	18.47	30	Pass
173	5865	22.856	13.59	4.92	70.958	18.51	30	Pass
177	5885	7.998	9.03	4.92	24.83	13.95	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 52-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	39.902	16.01	4.92	123.878	20.93	30	Pass
173	5865	38.194	15.82	4.92	118.576	20.74	30	Pass
177	5885	11.749	10.70	4.92	36.475	15.62	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 106-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	75.858	18.80	4.92	235.506	23.72	30	Pass
173	5865	81.846	19.13	4.92	254.096	24.05	30	Pass
177	5885	18.197	12.60	4.92	56.494	17.52	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 52+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	56.624	17.53	4.92	175.793	22.45	30	Pass
173	5865	60.395	17.81	4.92	187.5	22.73	30	Pass
177	5885	62.661	17.97	4.92	194.535	22.89	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 106+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
169	5845	70.958	18.51	4.92	220.293	23.43	30	Pass
173	5865	70.795	18.50	4.92	219.787	23.42	30	Pass
177	5885	39.994	16.02	4.92	124.164	20.94	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT80) 484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
171	5855	141.906	21.52	4.92	440.556	26.44	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 996+484-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	52.845	17.23	4.92	164.06	22.15	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 996+484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
163	5815	66.374	18.22	4.92	206.062	23.14	30	Pass

Note: The antenna gain is 4.92 dBi.

802.11a 2TX

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	14.44	14.93	58.914	17.70	4.92	182.902	22.62	30	Pass
173	5865	14.77	15.13	62.575	17.96	4.92	194.268	22.88	30	Pass
177	5885	14.61	15.08	61.117	17.86	4.92	189.741	22.78	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 4.92 dBi.

802.11ac (VHT20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	18.24	18.67	140.301	21.47	4.92	435.573	26.39	30	Pass
173	5865	18.12	18.63	137.809	21.39	4.92	427.836	26.31	30	Pass
177	5885	18.52	18.82	147.329	21.68	4.92	457.392	26.6	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ac (VHT40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	21.02	21.57	270.023	24.31	4.92	838.302	29.23	30	Pass
175	5875	21.49	21.84	293.685	24.68	4.92	911.763	29.6	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ac (VHT80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	20.98	21.54	267.875	24.28	4.92	831.634	29.2	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ac (VHT160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.49	18.83	147.015	21.67	4.92	456.417	26.59	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ax (HE20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	18.39	18.88	146.292	21.65	4.92	454.172	26.57	30	Pass
173	5865	18.29	18.67	141.074	21.49	4.92	437.973	26.41	30	Pass
177	5885	16.88	17.12	100.276	20.01	4.92	311.313	24.93	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ax (HE40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	21.27	21.70	281.879	24.50	4.92	875.11	29.42	30	Pass
175	5875	21.61	21.88	299.047	24.76	4.92	928.409	29.68	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ax (HE80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	21.13	21.72	278.311	24.45	4.92	864.033	29.37	30	Pass

Note: The directional gain is 4.92 dBi.

802.11ax (HE160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.62	18.91	150.582	21.78	4.92	467.491	26.7	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	18.43	18.92	147.646	21.69	4.92	458.376	26.61	30	Pass
173	5865	18.33	18.73	142.722	21.54	4.92	443.089	26.46	30	Pass
177	5885	16.95	17.15	101.425	20.06	4.92	314.88	24.98	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT40) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
167	5835	21.36	21.77	287.087	24.58	4.92	891.279	29.5	30	Pass
175	5875	21.66	21.95	303.23	24.82	4.92	941.396	29.74	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT80) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	21.16	21.75	280.241	24.48	4.92	870.025	29.4	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT160) 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	18.67	18.99	152.871	21.84	4.92	474.597	26.76	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 26-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	10.01	10.19	20.47	13.11	4.92	63.55	18.03	30	Pass
173	5865	9.99	10.12	20.257	13.07	4.92	62.889	17.99	30	Pass
177	5885	7.18	7.51	10.86	10.36	4.92	33.716	15.28	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 52-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	12.95	13.12	40.236	16.05	4.92	124.915	20.97	30	Pass
173	5865	12.96	13.15	40.423	16.07	4.92	125.496	20.99	30	Pass
177	5885	9.61	10.12	19.421	12.88	4.92	60.294	17.8	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 106-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	15.75	15.95	76.939	18.86	4.92	238.862	23.78	30	Pass
173	5865	15.76	16.41	81.423	19.11	4.92	252.783	24.03	30	Pass
177	5885	10.32	10.86	22.955	13.61	4.92	71.265	18.53	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 52+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	14.75	14.93	60.971	17.85	4.92	189.288	22.77	30	Pass
173	5865	14.70	15.11	61.946	17.92	4.92	192.315	22.84	30	Pass
177	5885	14.82	14.91	61.313	17.88	4.92	190.35	22.8	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT20) 106+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
169	5845	15.89	16.02	78.81	18.97	4.92	244.67	23.89	30	Pass
173	5865	15.74	16.09	78.142	18.93	4.92	242.596	23.85	30	Pass
177	5885	12.01	12.87	35.25	15.47	4.92	109.436	20.39	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT80) 484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
171	5855	20.88	21.25	255.814	24.08	4.92	794.19	29	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT160) 996+484-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	16.25	16.62	88.089	19.45	4.92	273.478	24.37	30	Pass

Note: The directional gain is 4.92 dBi.

802.11be (EHT160) 996+484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Directional Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
163	5815	16.21	16.59	87.387	19.41	4.92	271.298	24.33	30	Pass

Note: The directional gain is 4.92 dBi.

7.2 Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1TX

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	6.86	2.14	9.00	4.92	13.92	14	Pass
173	5865	6.64	2.14	8.78	4.92	13.7	14	Pass
177	5885	6.91	2.14	9.05	4.92	13.97	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	7.96	1.06	9.02	4.92	13.94	14	Pass
173	5865	7.95	1.06	9.01	4.92	13.93	14	Pass
177	5885	-0.53	1.06	0.53	4.92	5.45	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT40) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
167	5835	7.55	1.07	8.62	4.92	13.54	14	Pass
175	5875	7.36	1.07	8.43	4.92	13.35	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT80) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
171	5855	2.99	1.13	4.12	4.92	9.04	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-2.34	0.93	-1.41	4.92	3.51	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 26-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	8.59	0.29	8.88	4.92	13.8	14	Pass
173	5865	8.42	0.29	8.71	4.92	13.63	14	Pass
177	5885	-4.11	0.29	-3.82	4.92	1.1	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 52-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	8.55	0.29	8.84	4.92	13.76	14	Pass
173	5865	8.39	0.29	8.68	4.92	13.6	14	Pass
177	5885	-3.84	0.29	-3.55	4.92	1.37	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 106-tone RU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	8.51	0.29	8.80	4.92	13.72	14	Pass
173	5865	8.72	0.29	9.01	4.92	13.93	14	Pass
177	5885	-2.79	0.29	-2.50	4.92	2.42	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 52+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	8.28	0.31	8.59	4.92	13.51	14	Pass
173	5865	8.63	0.31	8.94	4.92	13.86	14	Pass
177	5885	8.66	0.31	8.97	4.92	13.89	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT20) 106+26-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
169	5845	8.46	0.28	8.74	4.92	13.66	14	Pass
173	5865	8.44	0.28	8.72	4.92	13.64	14	Pass
177	5885	-0.74	0.28	-0.46	4.92	4.46	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT80) 484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
171	5855	4.51	0.38	4.89	4.92	9.81	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 996+484-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-2.98	0.39	-2.59	4.92	2.33	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11be (EHT160) 996+484+242-tone MRU 1S1T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
163	5815	-2.46	0.41	-2.05	4.92	2.87	14	Pass

Note: The antenna gain is 4.92 dBi.

802.11a 2TX

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	0.69	0.99	2.14	5.99	7.93	13.92	14	Pass
173	5865	0.71	0.89	2.14	5.95	7.93	13.88	14	Pass
177	5885	0.63	0.84	2.14	5.89	7.93	13.82	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 7.93 dBi.

802.11be (EHT20) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	4.74	4.67	1.06	8.78	4.92	13.7	14	Pass
173	5865	4.56	4.74	1.06	8.72	4.92	13.64	14	Pass
177	5885	-4.28	-3.79	1.06	0.04	4.92	4.96	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT40) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
167	5835	4.19	4.78	1.07	8.58	4.92	13.5	14	Pass
175	5875	4.40	5.17	1.07	8.88	4.92	13.8	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT80) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
171	5855	1.50	2.17	1.13	5.99	4.92	10.91	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT160) 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-3.61	-3.16	0.93	0.56	4.92	5.48	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT20) 26-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	4.96	5.97	0.56	9.06	4.92	13.98	14	Pass
173	5865	4.71	5.52	0.56	8.70	4.92	13.62	14	Pass
177	5885	0.79	0.81	0.56	4.37	4.92	9.29	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT20) 52-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	5.06	5.45	0.56	8.83	4.92	13.75	14	Pass
173	5865	4.73	5.32	0.56	8.61	4.92	13.53	14	Pass
177	5885	-0.57	0.41	0.56	3.52	4.92	8.44	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT20) 106-tone RU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	4.64	5.39	0.56	8.60	4.92	13.52	14	Pass
173	5865	5.14	5.67	0.56	8.98	4.92	13.9	14	Pass
177	5885	-1.63	-0.74	0.56	2.41	4.92	7.33	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
- The directional gain is 4.92 dBi.

802.11be (EHT20) 52+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	5.21	5.62	0.59	9.02	4.92	13.94	14	Pass
173	5865	5.16	5.57	0.59	8.97	4.92	13.89	14	Pass
177	5885	4.99	5.43	0.59	8.82	4.92	13.74	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
- The directional gain is 4.92 dBi.

802.11be (EHT20) 106+26-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
169	5845	4.75	5.47	0.5	8.64	4.92	13.56	14	Pass
173	5865	4.74	5.25	0.5	8.51	4.92	13.43	14	Pass
177	5885	1.74	2.46	0.5	5.63	4.92	10.55	14	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
- The directional gain is 4.92 dBi.

802.11be (EHT80) 484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
171	5855	3.77	4.78	0.67	7.98	4.92	12.9	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.

802.11be (EHT160) 996+484-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-4.23	-3.69	0.69	-0.25	4.92	4.67	14	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.


802.11be (EHT160) 996+484+242-tone MRU 2S2T

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1						
163	5815	-4.55	-4.25	0.75	-0.64	4.92	4.28	14	Pass


Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements/NSS 2) = gain of antenna element + 0 dB
3. The directional gain is 4.92 dBi.


Spectrum Plot of Maximum Value

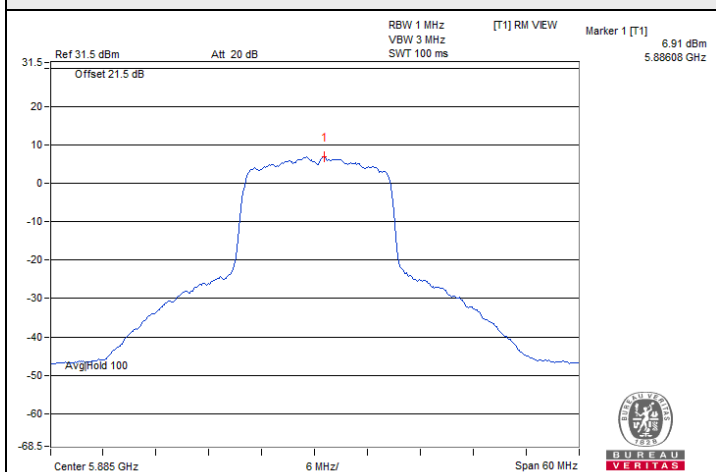


802.11a 1TX / Chain 0 : CH 177

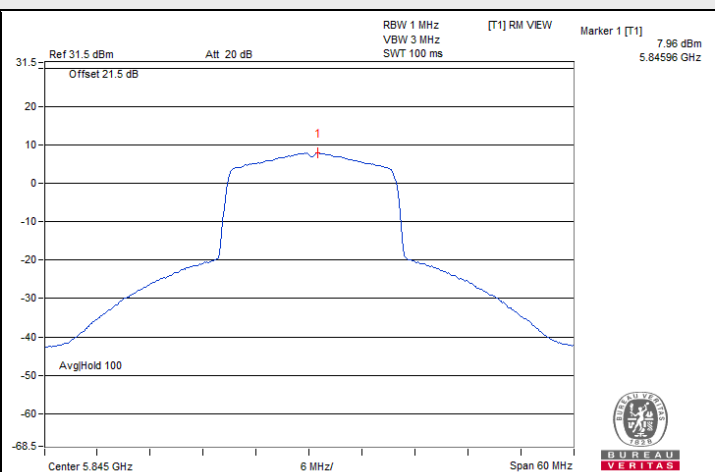


802.11be (EHT20) 1S1T / Chain 0 : CH 169

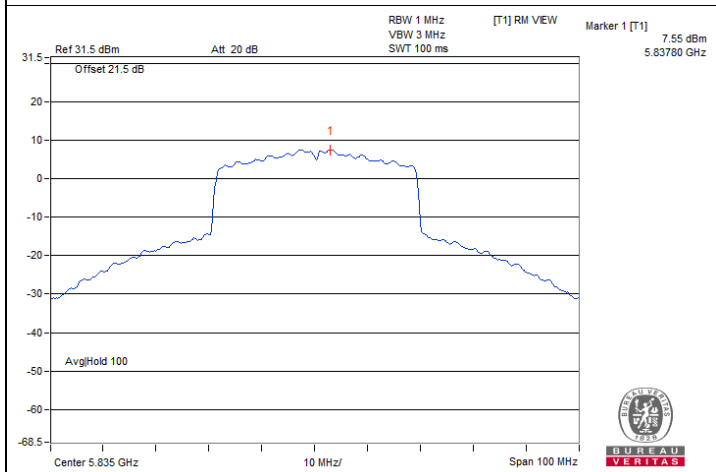


802.11be (EHT40) 1S1T / Chain 0 : CH 167

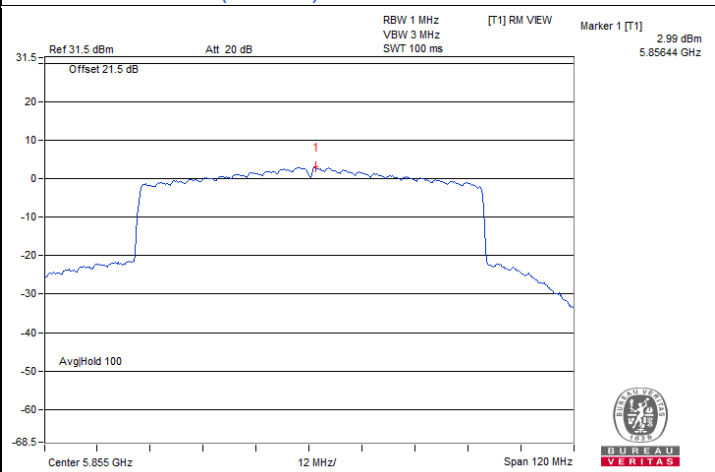

802.11be (EHT80) 1S1T / Chain 0 : CH 171

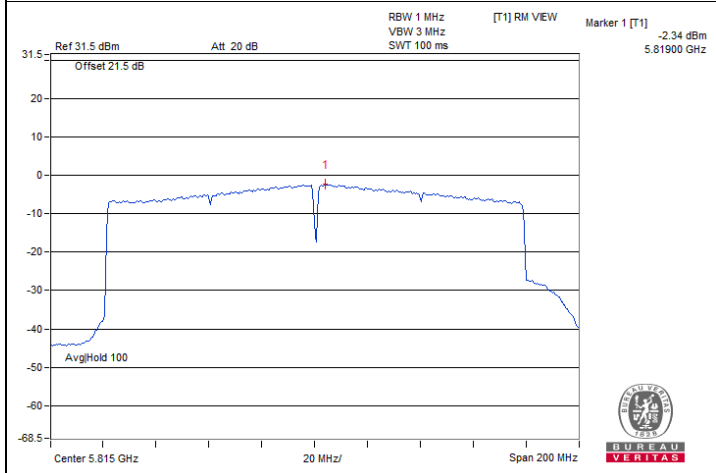


802.11be (EHT160) 1S1T / Chain 0 : CH 163

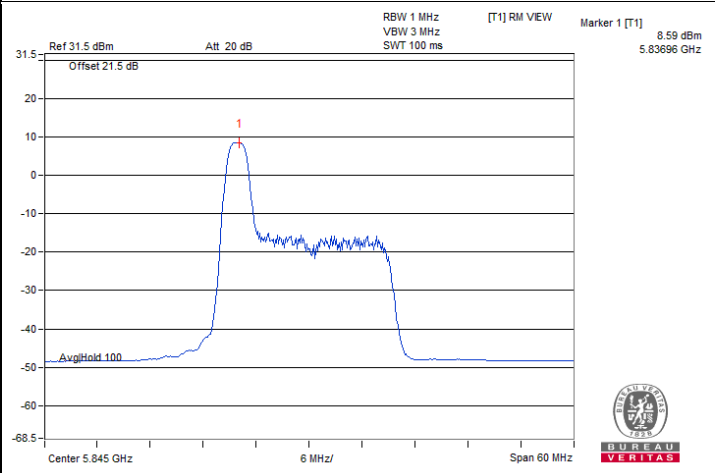


802.11be (EHT20) 26-tone RU 1S1T / Chain 0 : CH 169@0




Spectrum Plot of Maximum Value

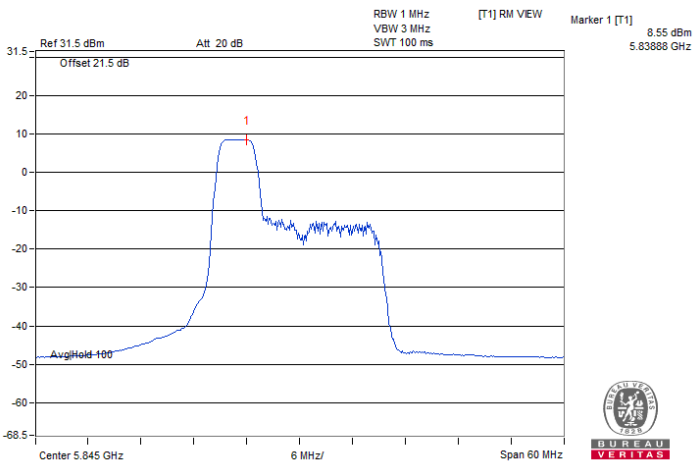


802.11be (EHT20) 52-tone RU 1S1T / Chain 0 : CH 169@37

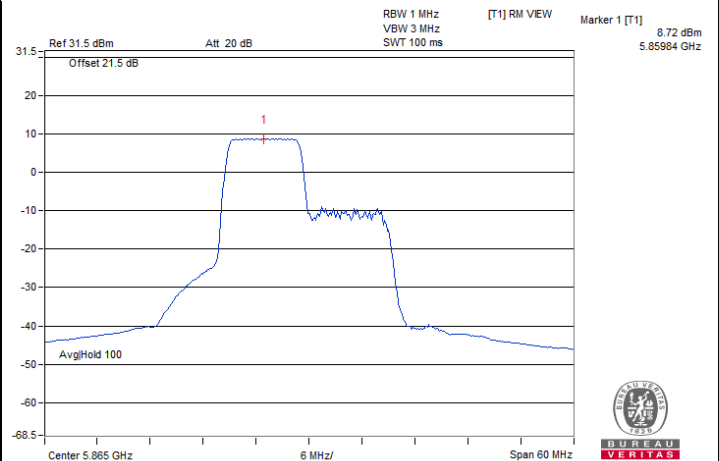


802.11be (EHT20) 106-tone RU 1S1T / Chain 0 : CH 173@53

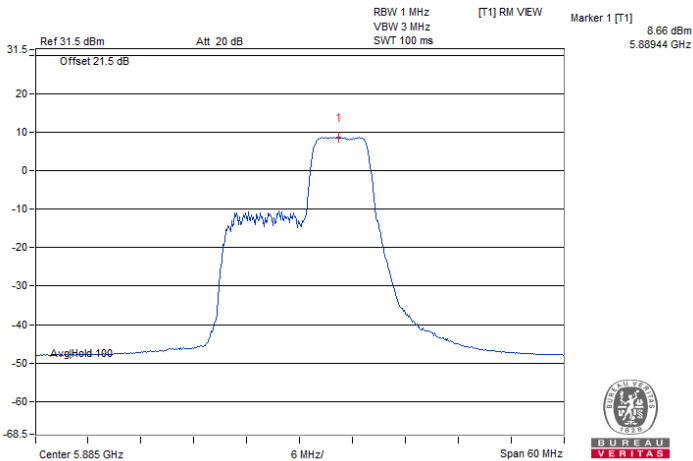


802.11be (EHT20) 52+26-tone MRU 1S1T / Chain 0 : CH 177@72

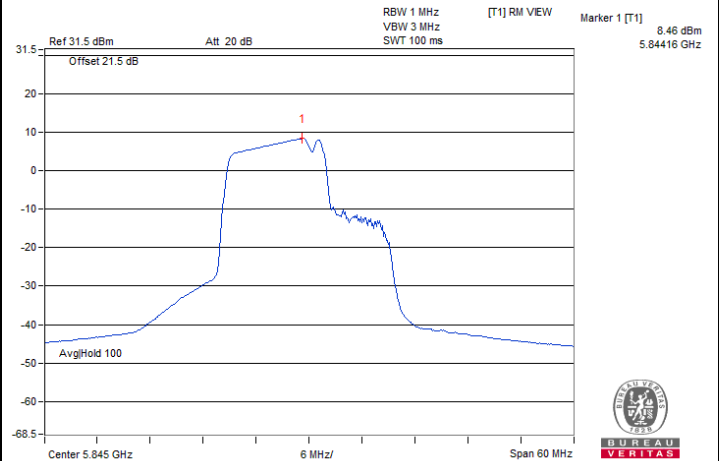

802.11be (EHT20) 106+26-tone MRU 1S1T / Chain 0 : CH 169@82

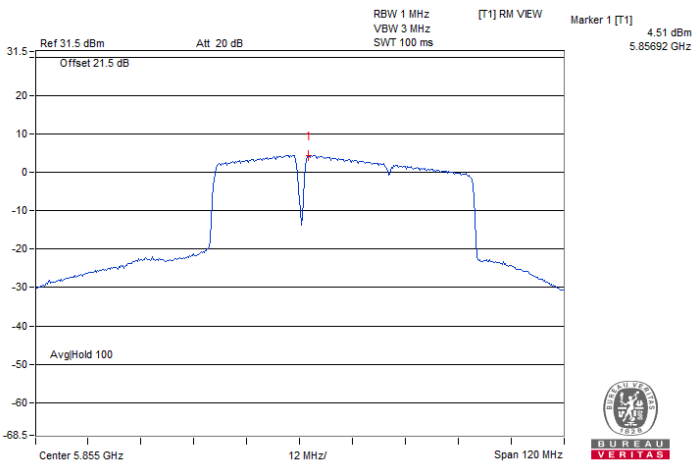


802.11be (EHT80) 484+242-tone MRU 1S1T / Chain 0 : CH 171@90

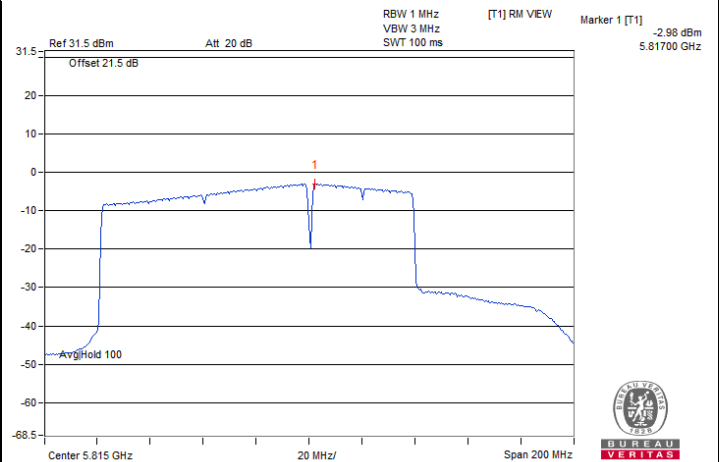


802.11be (EHT160) 996+484-tone MRU 1S1T / Chain 0 : CH 163@95-1




Spectrum Plot of Maximum Value

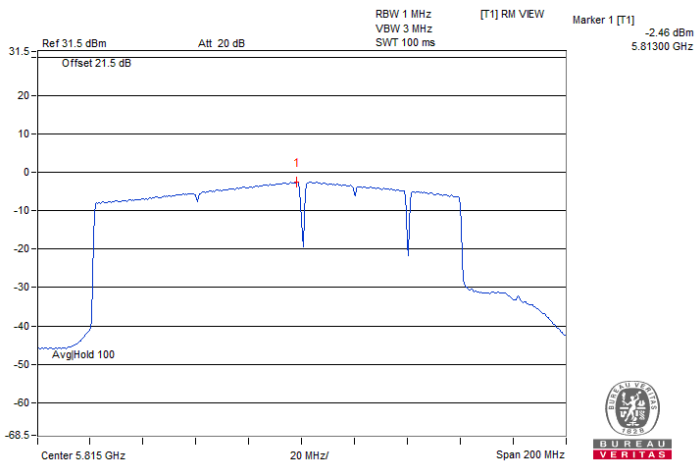


802.11be (EHT160) 996+484+242-tone MRU 1S1T / Chain 0 : CH 163@99-1

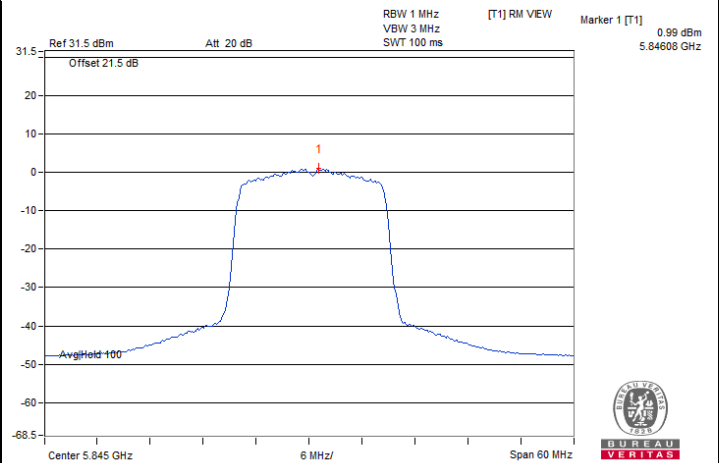


802.11a 2TX / Chain 1 : CH 169

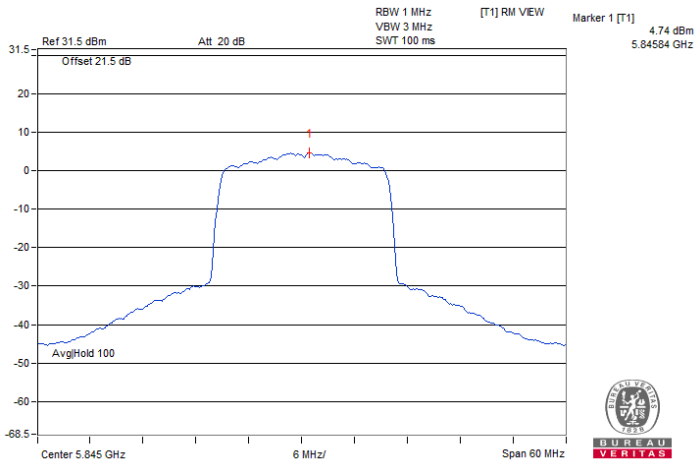


802.11be (EHT20) 2S2T / Chain 0 : CH 169

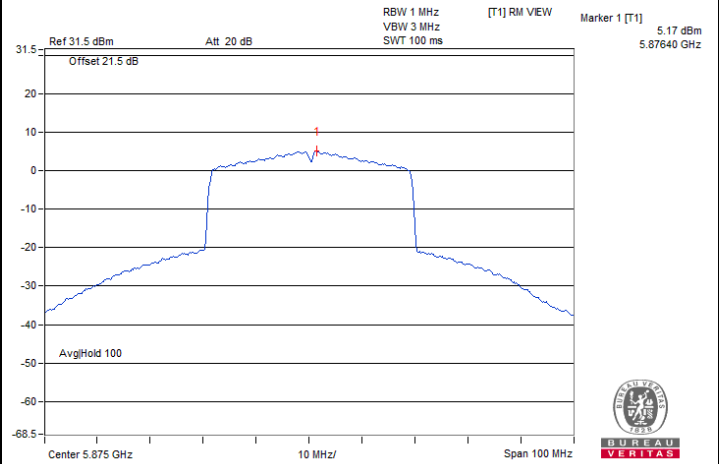

802.11be (EHT40) 2S2T / Chain 1 : CH 175

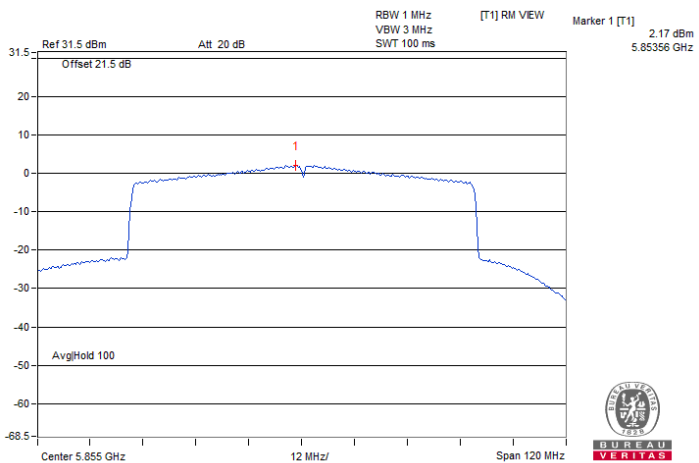


802.11be (EHT80) 2S2T / Chain 1 : CH 171

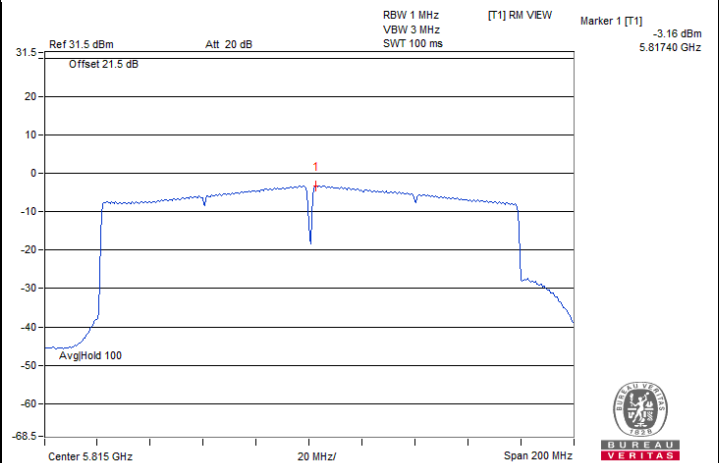


802.11be (EHT160) 2S2T / Chain 1 : CH 163


Spectrum Plot of Maximum Value

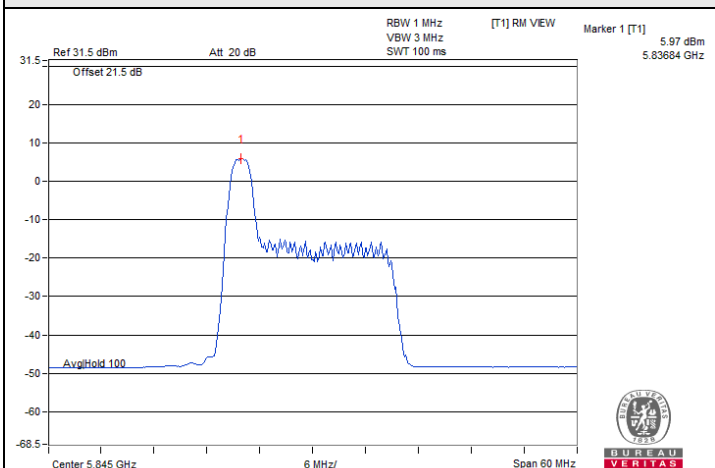


802.11be (EHT20) 26-tone RU 2S2T / Chain 1 : CH 169@0

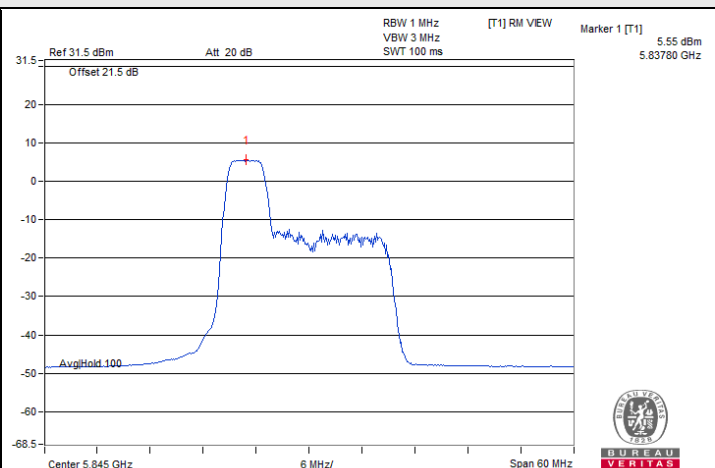


802.11be (EHT20) 52-tone RU 2S2T / Chain 1 : CH 169@37

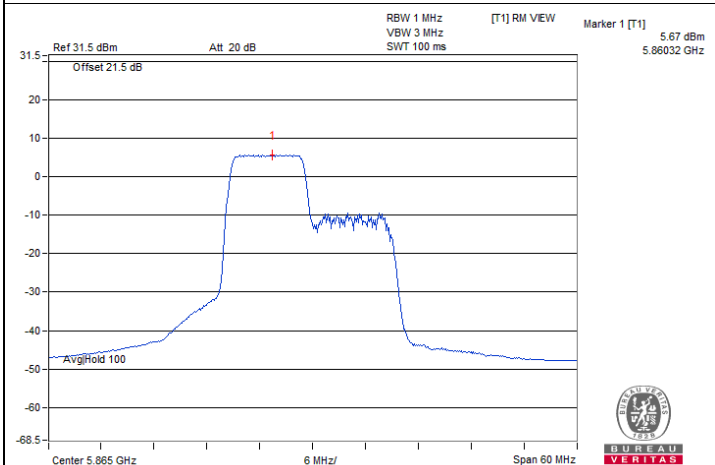


802.11be (EHT20) 106-tone RU 2S2T / Chain 1 : CH 173@53

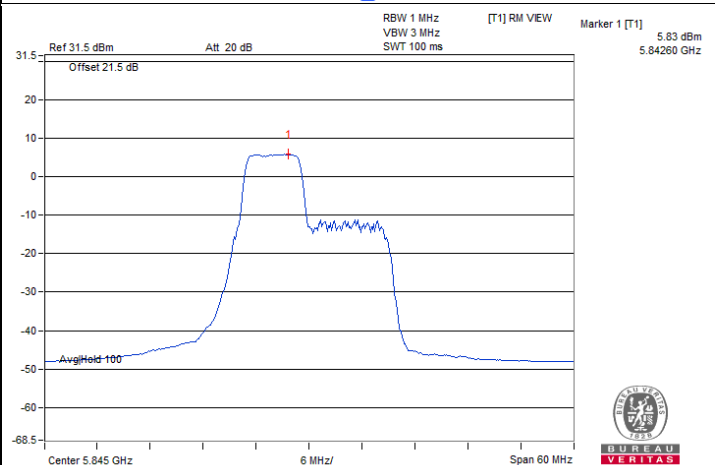

802.11be (EHT20) 52+26-tone MRU 2S2T / Chain 1 : CH 169@70


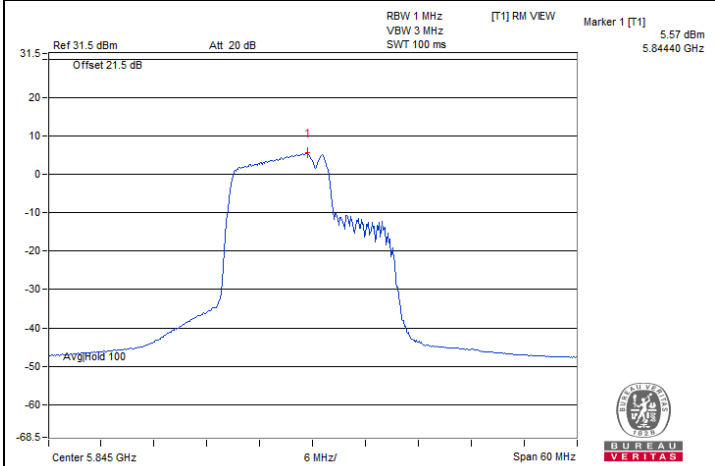


802.11be (EHT20) 106+26-tone MRU 2S2T / Chain 1 : CH 169@82

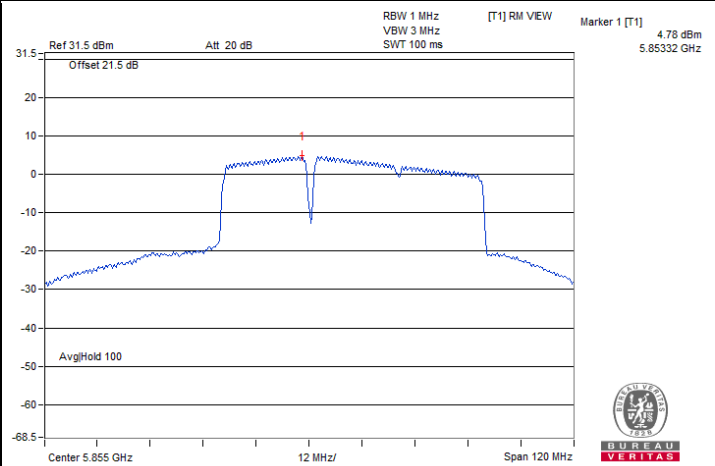

802.11be (EHT80) 484+242-tone MRU 2S2T / Chain 1 : CH 171@90

Spectrum Plot of Maximum Value

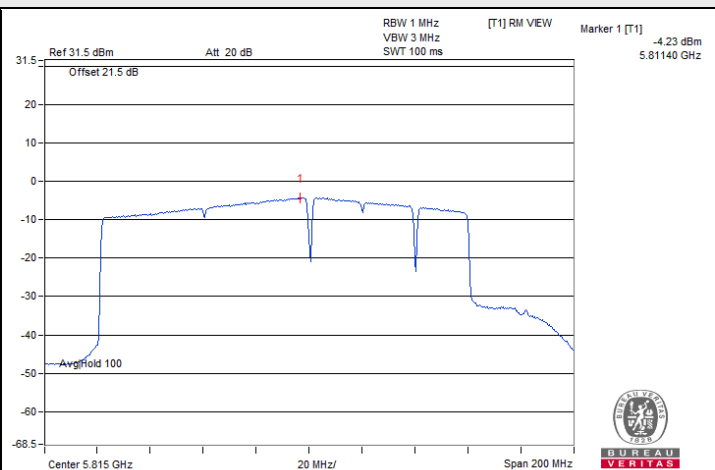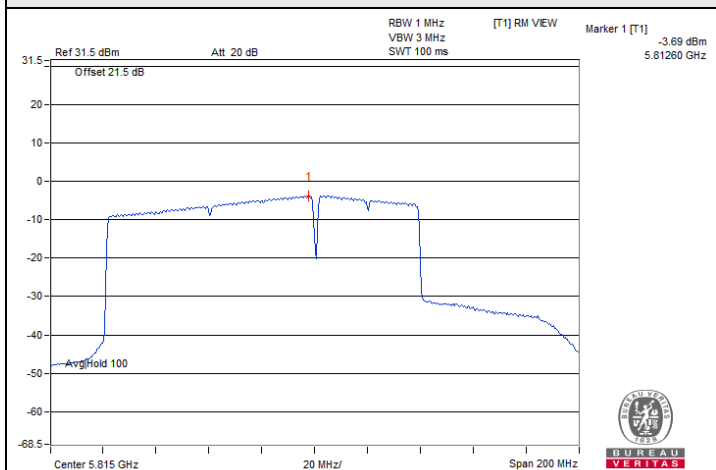

802.11be (EHT160) 996+484-tone MRU 2S2T / Chain 1 :
CH 163@95-1

802.11be (EHT160) 996+484+242-tone MRU 2S2T / Chain
1 : CH 163@99-1

7.3 6 dB Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

802.11a 1TX

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	16.04	0.5	Pass
173	5865	13.13	0.5	Pass
177	5885	15.06	0.5	Pass

802.11be (EHT20) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	18.3	0.5	Pass
173	5865	17.94	0.5	Pass
177	5885	18.28	0.5	Pass

802.11be (EHT40) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
167	5835	34.27	0.5	Pass
175	5875	30.97	0.5	Pass

802.11be (EHT80) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
171	5855	58.79	0.5	Pass

802.11be (EHT160) 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	156.33	0.5	Pass

802.11be (EHT20) 26-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	2.1	0.5	Pass
173	5865	2.1	0.5	Pass
177	5885	2.12	0.5	Pass

802.11be (EHT20) 52-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.07	0.5	Pass
173	5865	17.05	0.5	Pass
177	5885	17.05	0.5	Pass

802.11be (EHT20) 106-tone RU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.12	0.5	Pass
173	5865	17.14	0.5	Pass
177	5885	17.13	0.5	Pass

802.11be (EHT20) 52+26-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	15.13	0.5	Pass
173	5865	15.12	0.5	Pass
177	5885	15.12	0.5	Pass

802.11be (EHT20) 106+26-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
169	5845	17.05	0.5	Pass
173	5865	17	0.5	Pass
177	5885	16.83	0.5	Pass

802.11be (EHT80) 484+242-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
171	5855	51.37	0.5	Pass

802.11be (EHT160) 996+484-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	84.69	0.5	Pass

802.11be (EHT160) 996+484+242-tone MRU 1S1T

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
163	5815	132.75	0.5	Pass

802.11a 2TX

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	15.52	15.04	0.5	Pass
173	5865	16.30	14.03	0.5	Pass
177	5885	16.26	13.81	0.5	Pass

802.11be (EHT20) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	15.82	17.29	0.5	Pass
173	5865	15.84	17.84	0.5	Pass
177	5885	18.02	18.33	0.5	Pass

802.11be (EHT40) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
167	5835	32.50	33.18	0.5	Pass
175	5875	36.62	36.12	0.5	Pass

802.11be (EHT80) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
171	5855	75.14	63.85	0.5	Pass

802.11be (EHT160) 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	130.15	140.41	0.5	Pass

802.11be (EHT20) 26-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	2.11	2.11	0.5	Pass
173	5865	2.09	2.09	0.5	Pass
177	5885	2.07	2.09	0.5	Pass

802.11be (EHT20) 52-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	17.07	17.04	0.5	Pass
173	5865	17.04	17.04	0.5	Pass
177	5885	17.03	17.03	0.5	Pass

802.11be (EHT20) 106-tone RU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	17.13	17.14	0.5	Pass
173	5865	17.12	17.13	0.5	Pass
177	5885	17.11	17.12	0.5	Pass

802.11be (EHT20) 52+26-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	15.13	15.12	0.5	Pass
173	5865	15.12	15.12	0.5	Pass
177	5885	15.12	15.12	0.5	Pass



802.11be (EHT20) 106+26-tone MRU 2S2T

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
169	5845	16.84	16.76	0.5	Pass
173	5865	16.84	17.06	0.5	Pass
177	5885	17.04	16.92	0.5	Pass

802.11be (EHT80) 484+242-tone MRU 2S2T


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
171	5855	57.18	52.06	0.5	Pass

802.11be (EHT160) 996+484-tone MRU 2S2T


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	114.24	108.30	0.5	Pass

802.11be (EHT160) 996+484+242-tone MRU 2S2T


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
163	5815	127.72	130.33	0.5	Pass

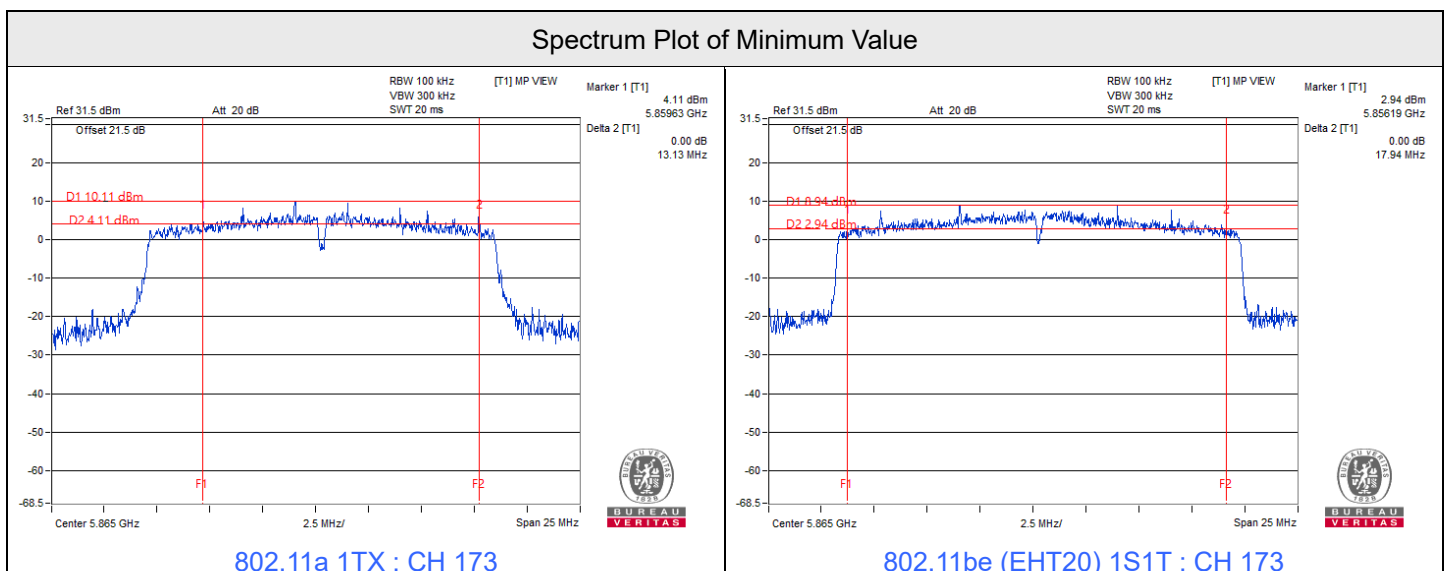


Spectrum Plot of Minimum Value

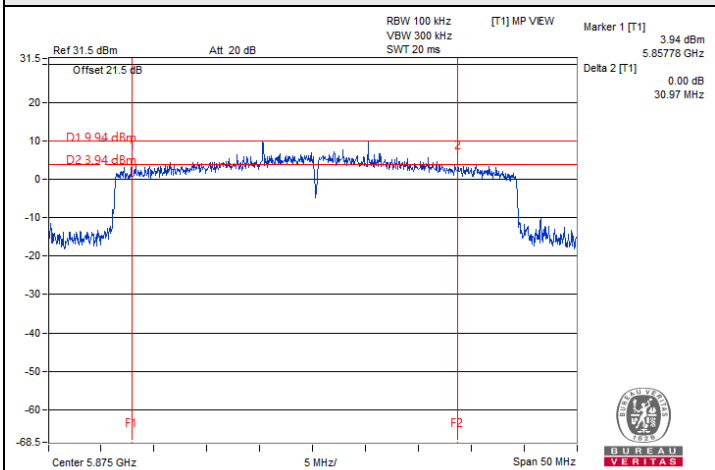


802.11be (EHT40) 1S1T : CH 175

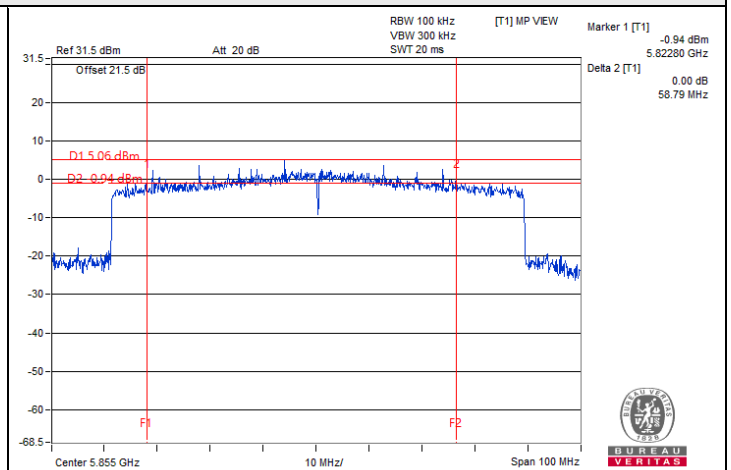


802.11be (EHT80) 1S1T : CH 171

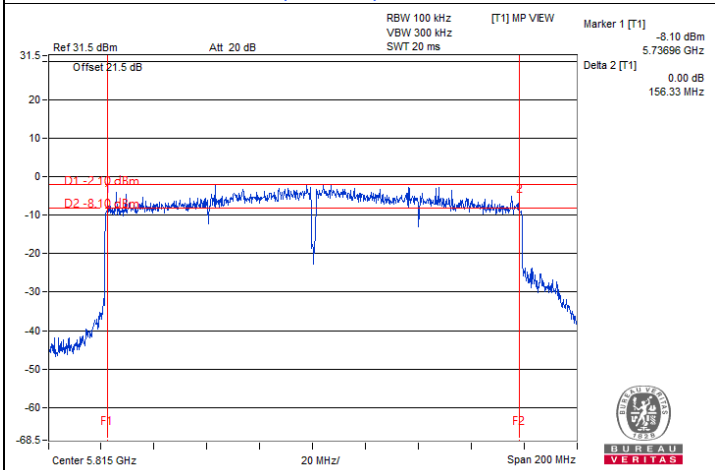


802.11be (EHT160) 1S1T : CH 163

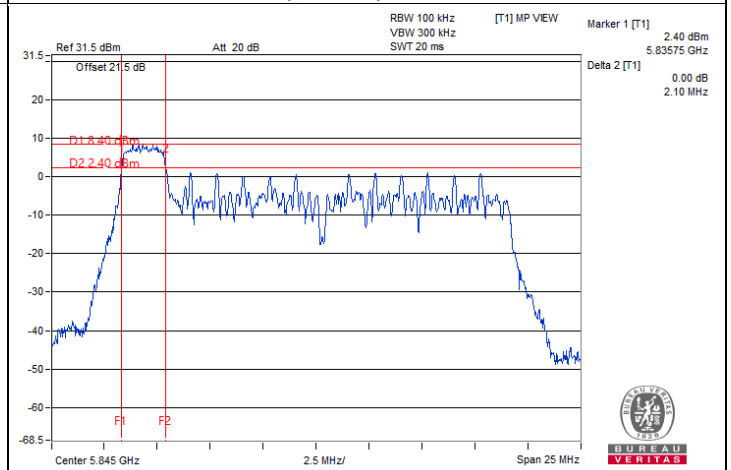

802.11be (EHT20) 26-tone RU 1S1T : CH 169@0

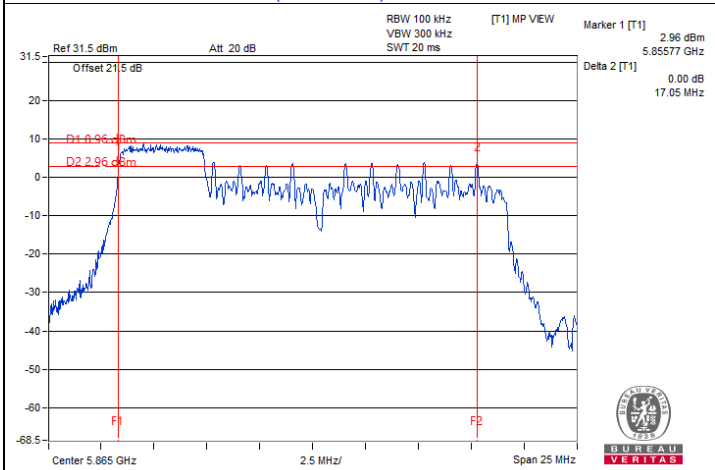



802.11be (EHT20) 52-tone RU 1S1T : CH 173@37

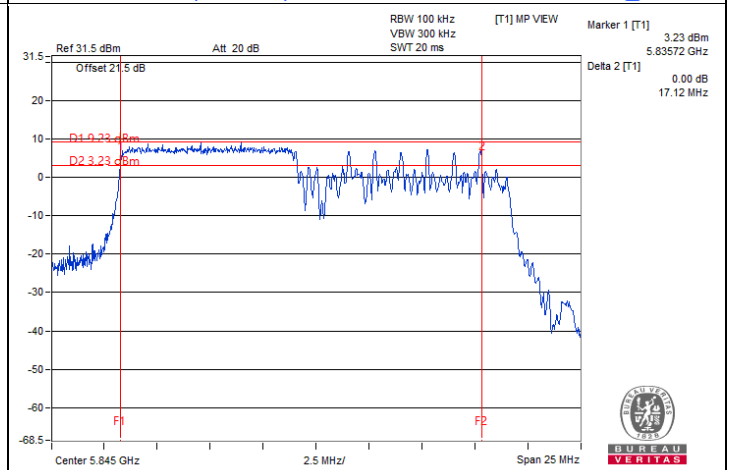

802.11be (EHT20) 106-tone RU 1S1T : CH 169@53





Spectrum Plot of Minimum Value

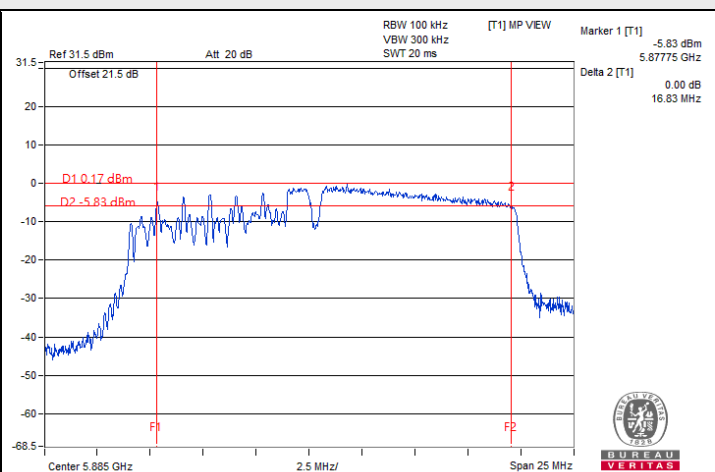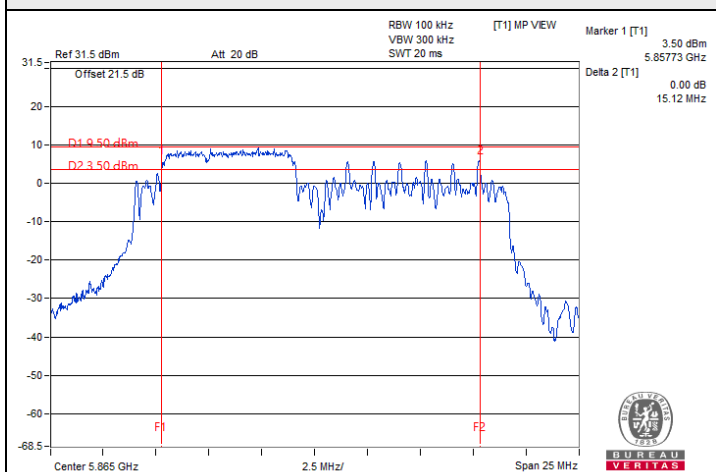



802.11be (EHT20) 52+26-tone MRU 1S1T : CH 173@70

802.11be (EHT20) 106+26-tone MRU 1S1T : CH 177@83

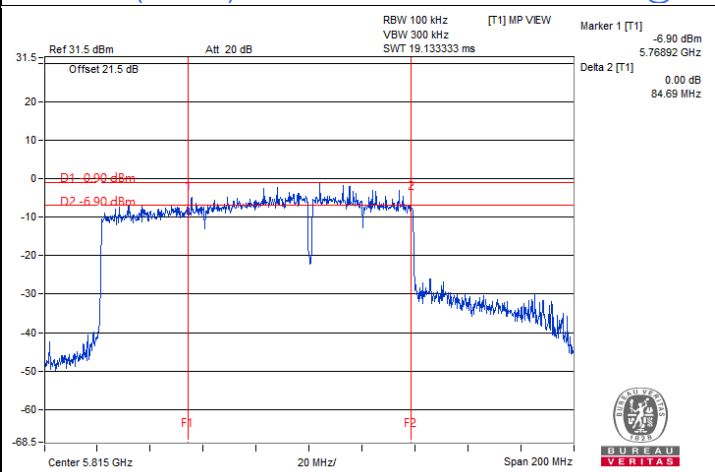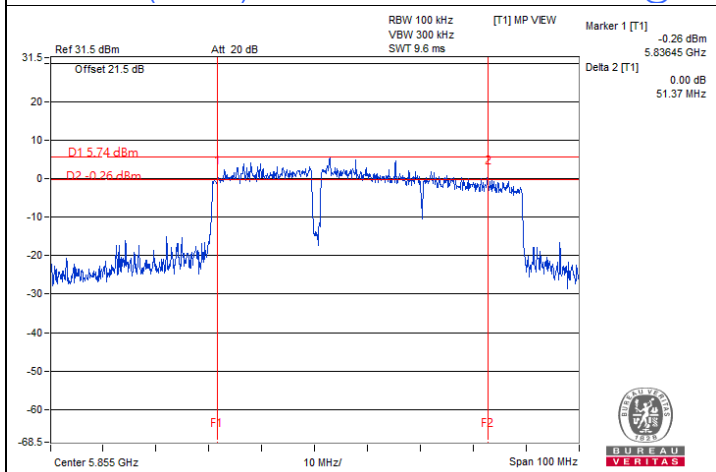

802.11be (EHT80) 484+242-tone MRU 1S1T : CH 171@90


802.11be (EHT160) 996+484-tone MRU 1S1T : CH 163@95-1

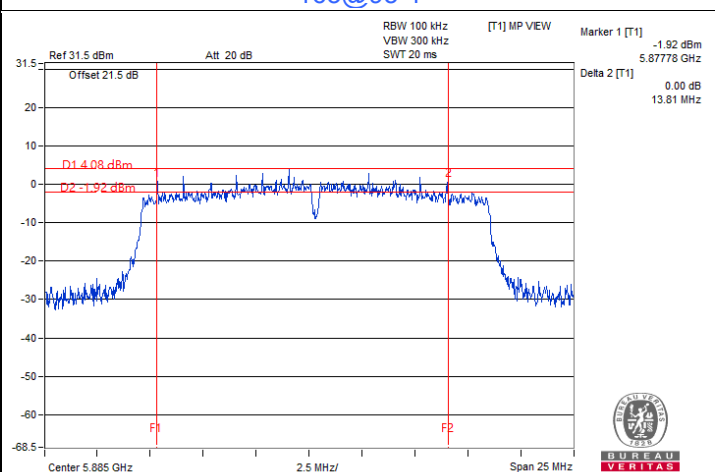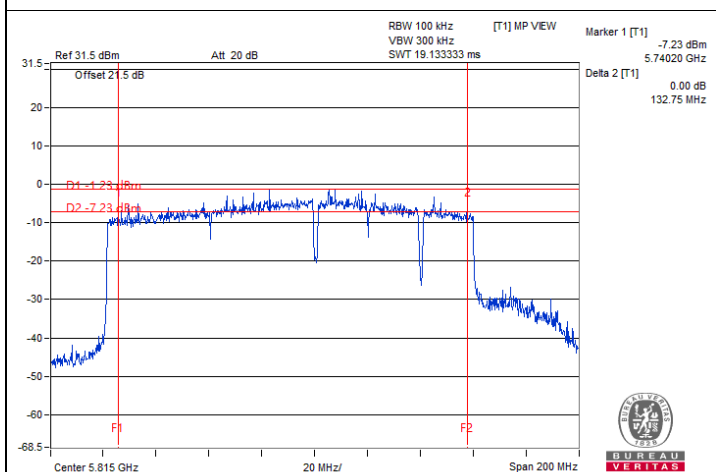


802.11be (EHT160) 996+484+242-tone MRU 1S1T : CH 163@99-1

802.11a 2TX / Chain 1 : CH 177


Spectrum Plot of Minimum Value

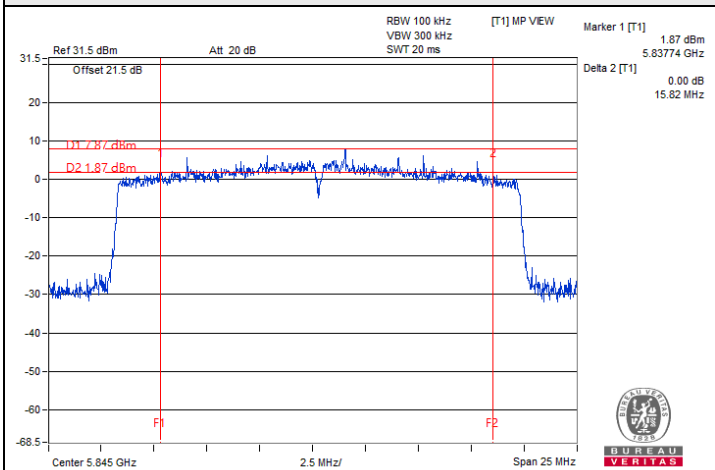


802.11be (EHT20) 2S2T / Chain 0 : CH 169

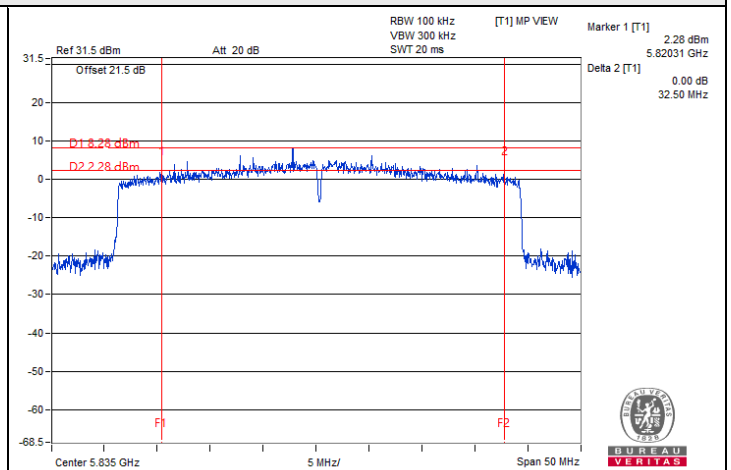


802.11be (EHT40) 2S2T / Chain 0 : CH 167

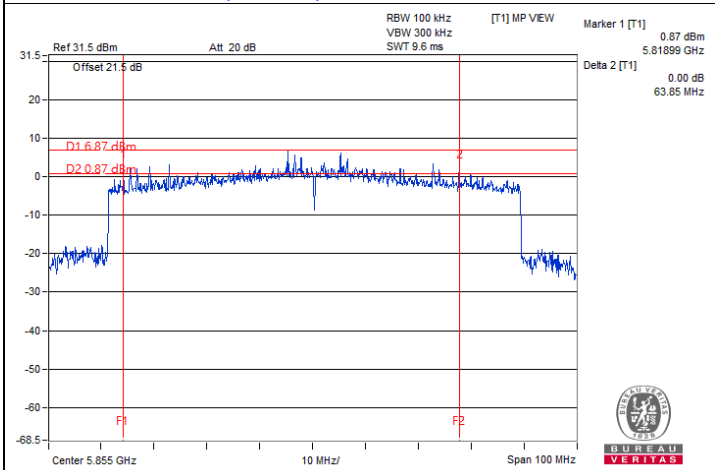


802.11be (EHT80) 2S2T / Chain 1 : CH 171

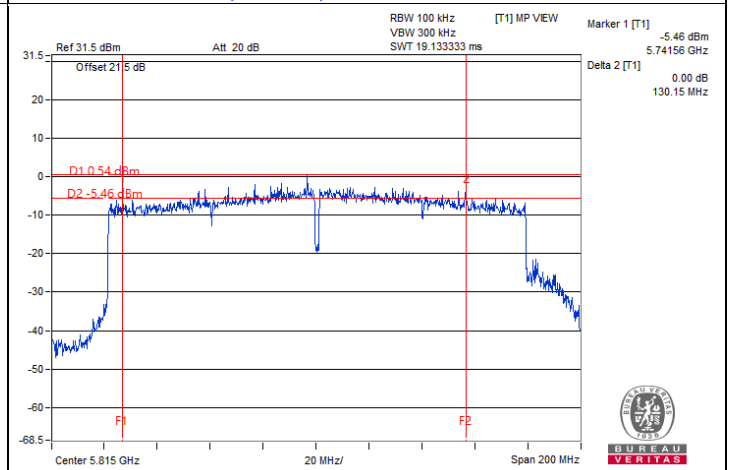

802.11be (EHT160) 2S2T / Chain 0 : CH 163

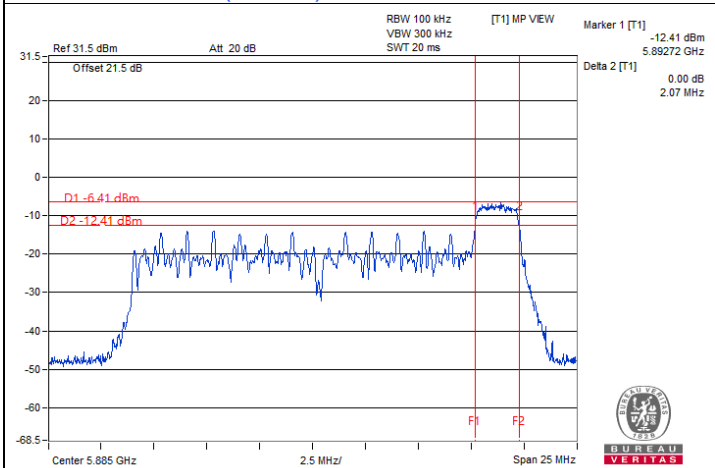


802.11be (EHT20) 26-tone RU 2S2T / Chain 0 : CH 177@8

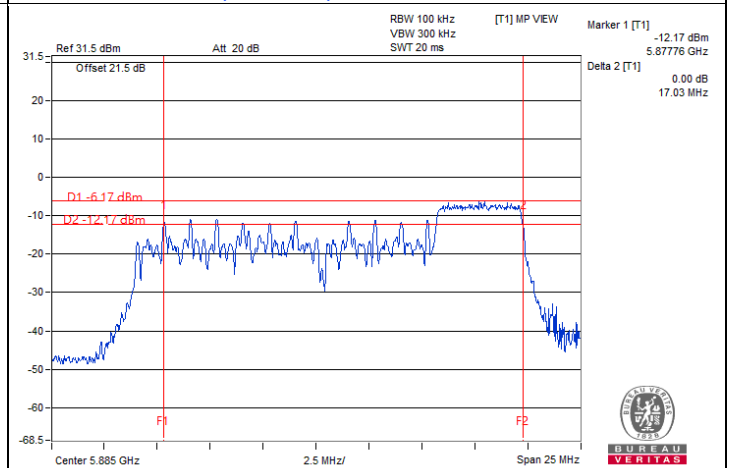


802.11be (EHT20) 52-tone RU 2S2T / Chain 0 : CH 177@40




Spectrum Plot of Minimum Value

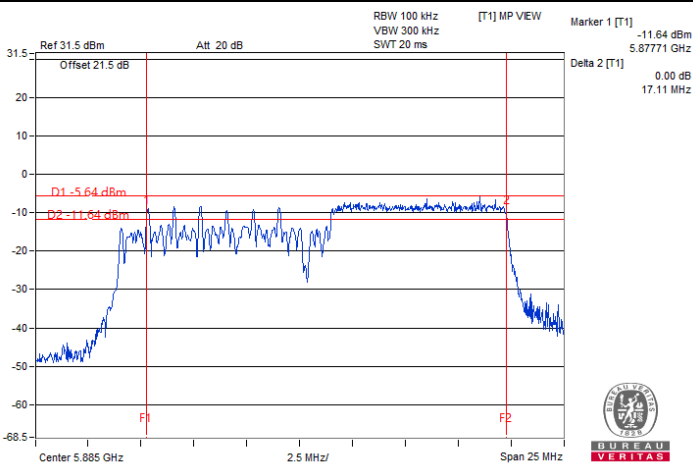


802.11be (EHT20) 106-tone RU 2S2T / Chain 0 : CH 177@54

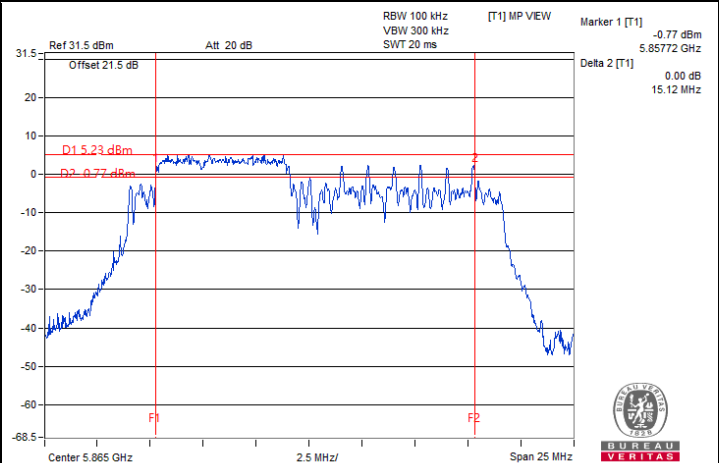


802.11be (EHT20) 52+26-tone MRU 2S2T / Chain 0 : CH 173@70

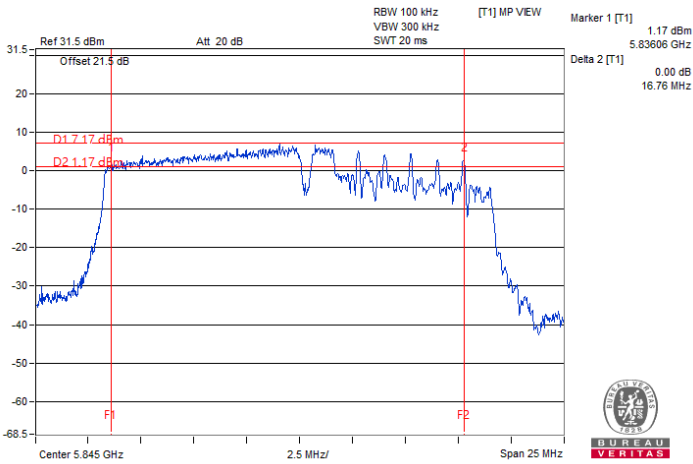


802.11be (EHT20) 106+26-tone MRU 2S2T / Chain 1 : CH 169@82

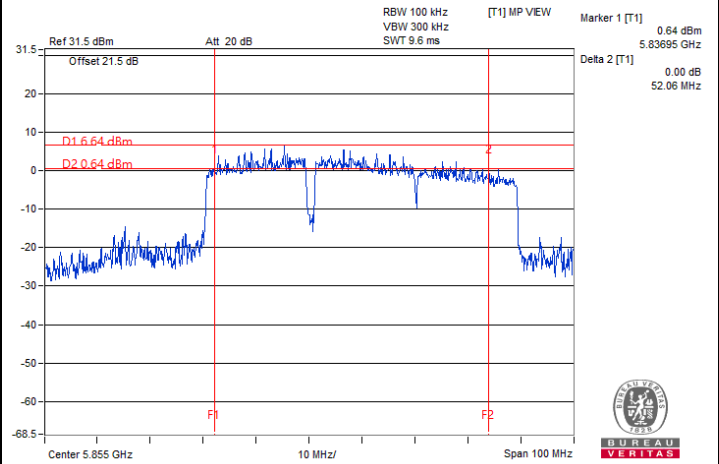

802.11be (EHT80) 484+242-tone MRU 2S2T / Chain 1 : CH 171@90

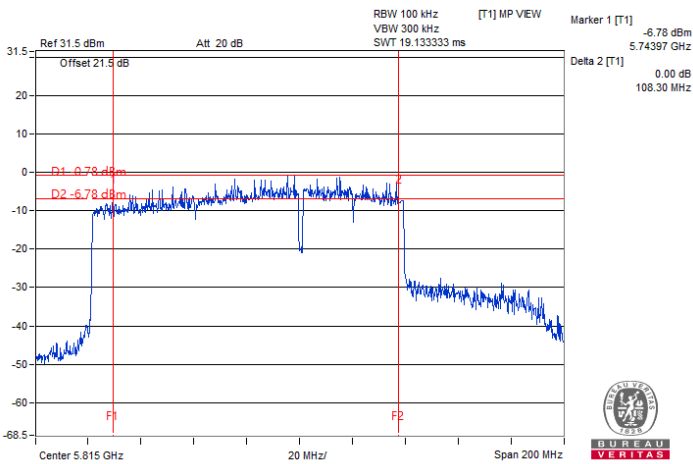

802.11be (EHT160) 996+484-tone MRU 2S2T / Chain 1 : CH 163@95-1

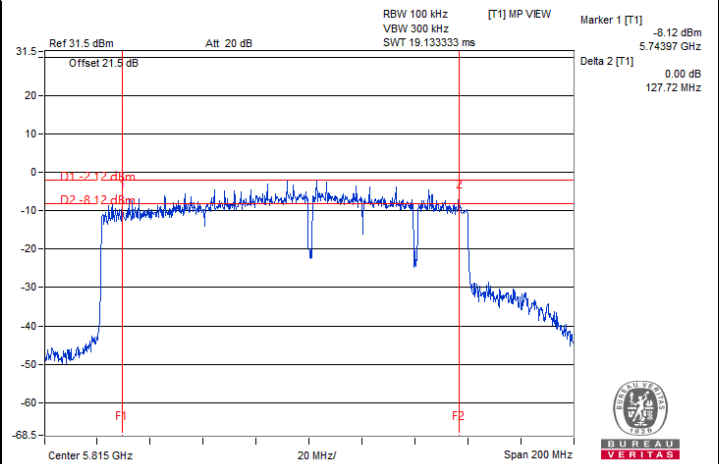

802.11be (EHT160) 996+484+242-tone MRU 2S2T / Chain 0 : CH 163@99-1

7.4 Frequency Stability

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

802.11a

Frequency Stability Versus Temperature									
Operating Frequency: 5865 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
70	3.3	5865.0237	Pass	5865.0196	Pass	5865.02	Pass	5865.0204	Pass
60	3.3	5864.9788	Pass	5864.9806	Pass	5864.9797	Pass	5864.9779	Pass
50	3.3	5864.9747	Pass	5864.9755	Pass	5864.9787	Pass	5864.9792	Pass
40	3.3	5864.9807	Pass	5864.9831	Pass	5864.9787	Pass	5864.9831	Pass
30	3.3	5864.9995	Pass	5865.002	Pass	5865.0019	Pass	5864.9992	Pass
20	3.3	5865.0115	Pass	5865.0099	Pass	5865.0104	Pass	5865.0075	Pass
10	3.3	5865.0144	Pass	5865.0196	Pass	5865.0158	Pass	5865.0155	Pass
0	3.3	5865.0048	Pass	5865.0076	Pass	5865.0067	Pass	5865.0063	Pass
-10	3.3	5865.0031	Pass	5864.9989	Pass	5865.0013	Pass	5865	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5865 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	3.795	5865.0138	Pass	5865.0132	Pass	5865.0107	Pass	5865.0109	Pass
	3.3	5865.0115	Pass	5865.0099	Pass	5865.0104	Pass	5865.0075	Pass
	2.805	5865.0011	Pass	5865.0018	Pass	5865.0027	Pass	5865.0015	Pass

7.5 AC Power Conducted Emissions


For 1S1T

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.93	44.39	22.33	54.32	32.26	65.58	55.58	-11.26	-23.32
2	0.22422	9.93	36.12	14.51	46.05	24.44	62.66	52.66	-16.61	-28.22
3	0.49766	9.94	17.38	1.53	27.32	11.47	56.04	46.04	-28.72	-34.57
4	3.47656	10.08	26.15	17.82	36.23	27.90	56.00	46.00	-19.77	-18.10
5	14.31641	10.75	16.65	5.91	27.40	16.66	60.00	50.00	-32.60	-33.34
6	21.77734	11.21	23.39	17.68	34.60	28.89	60.00	50.00	-25.40	-21.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

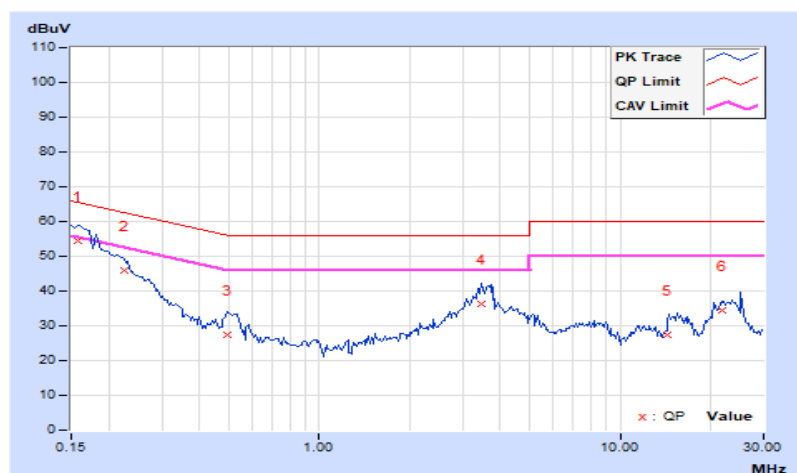


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.99	42.69	22.39	52.68	32.38	65.38	55.38	-12.70	-23.00
2	0.28672	9.99	28.75	13.44	38.74	23.43	60.62	50.62	-21.88	-27.19
3	0.50547	10.00	18.04	3.55	28.04	13.55	56.00	46.00	-27.96	-32.45
4	3.57422	10.13	26.33	17.78	36.46	27.91	56.00	46.00	-19.54	-18.09
5	16.06641	10.70	18.53	9.79	29.23	20.49	60.00	50.00	-30.77	-29.51
6	25.12891	11.00	22.30	21.62	33.30	32.62	60.00	50.00	-26.70	-17.38

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

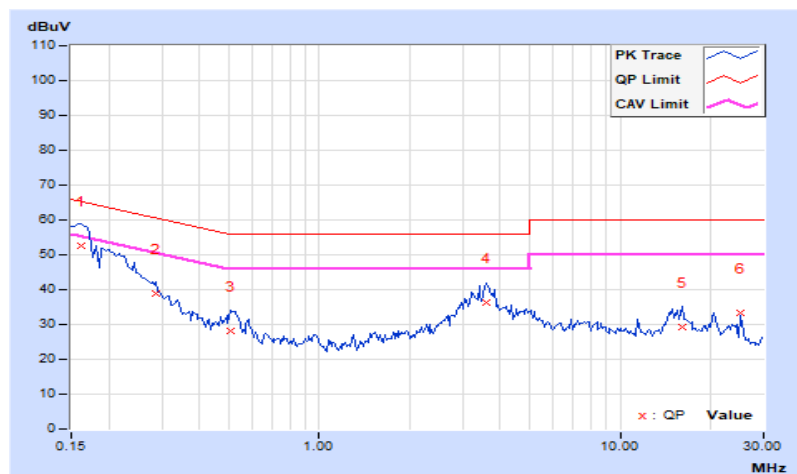


For 2S2T

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	9.93	44.16	23.27	54.09	33.20	65.18	55.18	-11.09	-21.98
2	0.21641	9.93	35.32	12.00	45.25	21.93	62.96	52.96	-17.71	-31.03
3	0.50547	9.95	17.80	4.15	27.75	14.10	56.00	46.00	-28.25	-31.90
4	3.44922	10.08	26.30	18.01	36.38	28.09	56.00	46.00	-19.62	-17.91
5	15.07813	10.81	18.50	7.51	29.31	18.32	60.00	50.00	-30.69	-31.68
6	22.05078	11.22	21.00	15.15	32.22	26.37	60.00	50.00	-27.78	-23.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

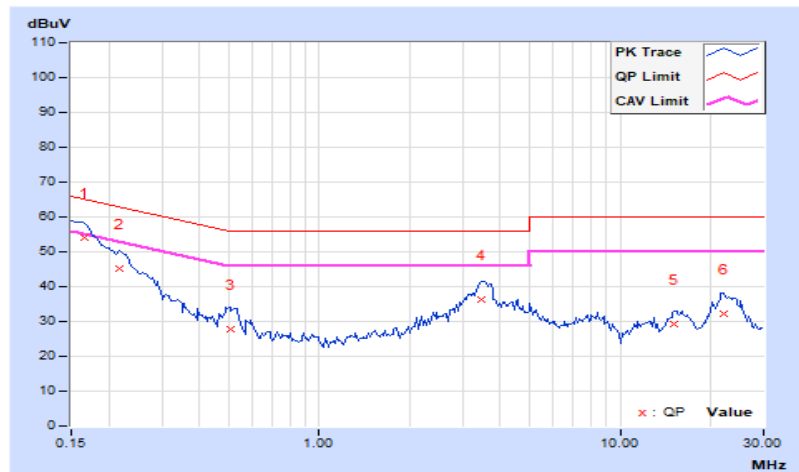


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.99	44.23	22.47	54.22	32.46	65.58	55.58	-11.36	-23.12
2	0.19297	9.99	40.13	25.19	50.12	35.18	63.91	53.91	-13.79	-18.73
3	0.47422	10.00	17.98	3.20	27.98	13.20	56.44	46.44	-28.46	-33.24
4	3.39453	10.12	25.60	17.36	35.72	27.48	56.00	46.00	-20.28	-18.52
5	15.16406	10.65	18.97	9.90	29.62	20.55	60.00	50.00	-30.38	-29.45
6	25.12891	11.00	20.45	19.90	31.45	30.90	60.00	50.00	-28.55	-19.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

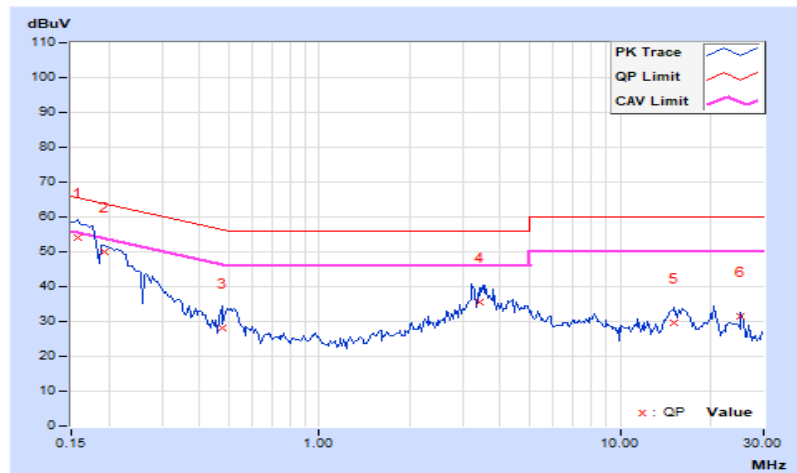

7.6 Unwanted Emissions below 1 GHz


Mode A
For 1S1T

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	60.68	30.23 PK	40	-9.77	-74.65	9.62	-65.03
2	124.09	31.44 PK	43.5	-12.06	-73.44	9.62	-63.82
3	394.72	31.08 PK	46	-14.92	-73.8	9.62	-64.18
4	563.14	31.63 PK	46	-14.37	-73.25	9.62	-63.63
5	732.64	32.33 PK	46	-13.67	-72.55	9.62	-62.93
6	838.74	32.37 PK	46	-13.63	-72.51	9.62	-62.89

Notes:

- Margin value = Emission Level - Limit value
- The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

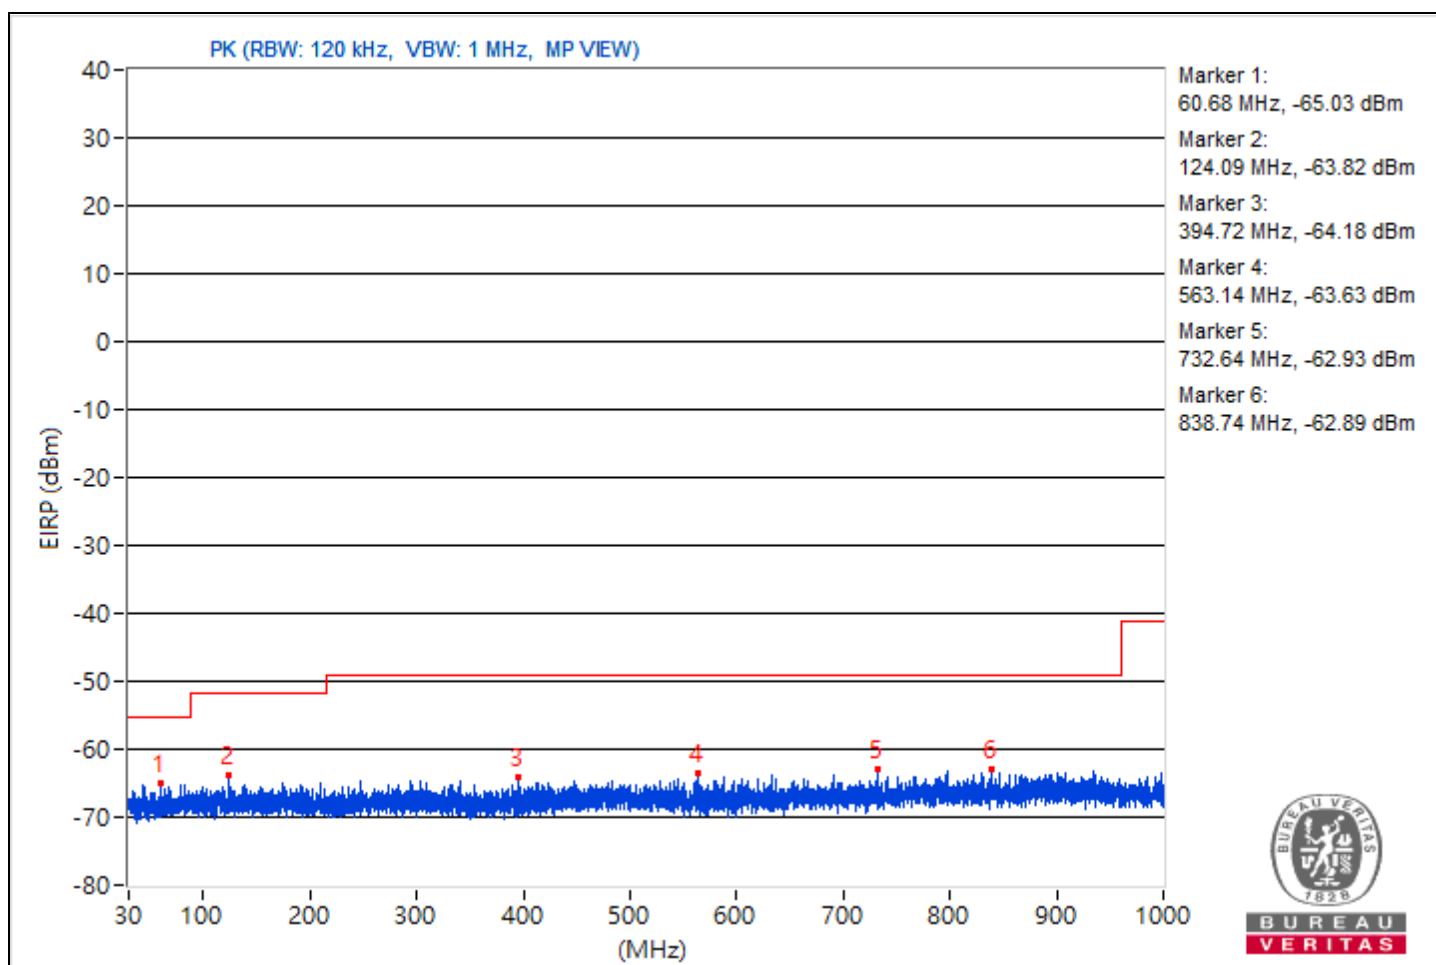


For 2S2T

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	39.46	31.79 PK	40	-8.21	-74.78	-78.01	9.62	-63.47
2	179.99	32.61 PK	43.5	-10.89	-76.94	-74.08	9.62	-62.65
3	372.77	32.76 PK	46	-13.24	-73.48	-77.82	9.62	-62.5
4	547.86	33.18 PK	46	-12.82	-73.54	-76.33	9.62	-62.08
5	774.84	33.76 PK	46	-12.24	-75.3	-73.22	9.62	-61.5
6	900.33	35.1 PK	46	-10.9	-71.51	-74.62	9.62	-60.16

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

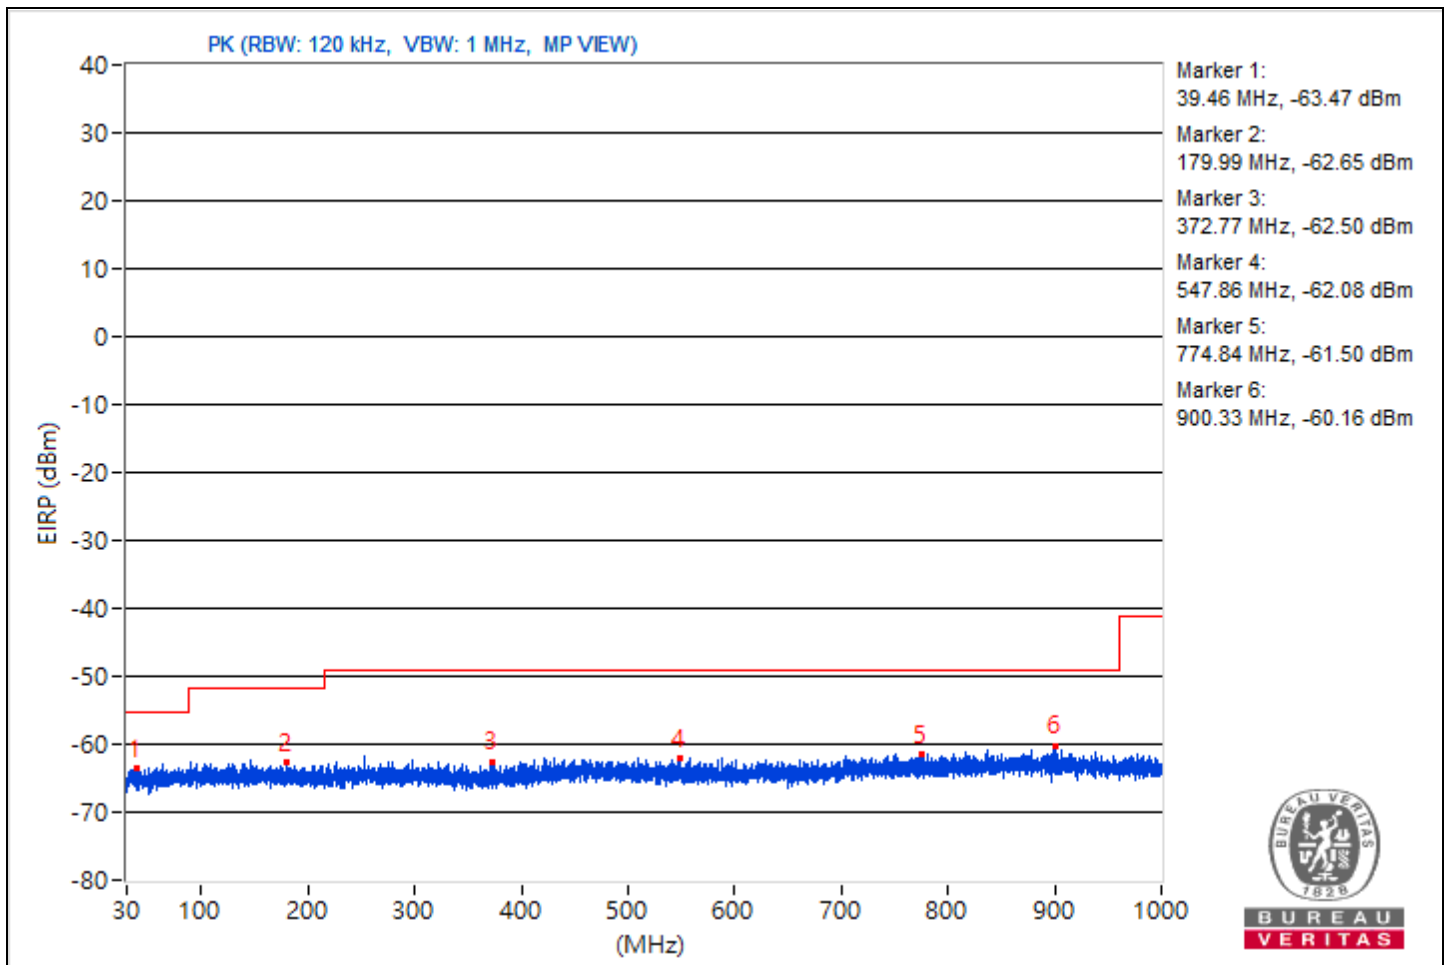


Mode B
For 1S1T

RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.25	24.6 QP	43.5	-18.9	1.00 H	322	41.2	-16.6
2	239.62	36.2 QP	46.0	-9.8	1.00 H	235	50.9	-14.7
3	290.05	38.5 QP	46.0	-7.5	3.00 H	299	51.3	-12.8
4	432.43	40.9 QP	46.0	-5.1	1.50 H	297	49.7	-8.8
5	696.56	45.2 QP	46.0	-0.8	1.50 H	244	49.2	-4.0
6	902.83	42.2 QP	46.0	-3.8	1.00 H	260	43.3	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

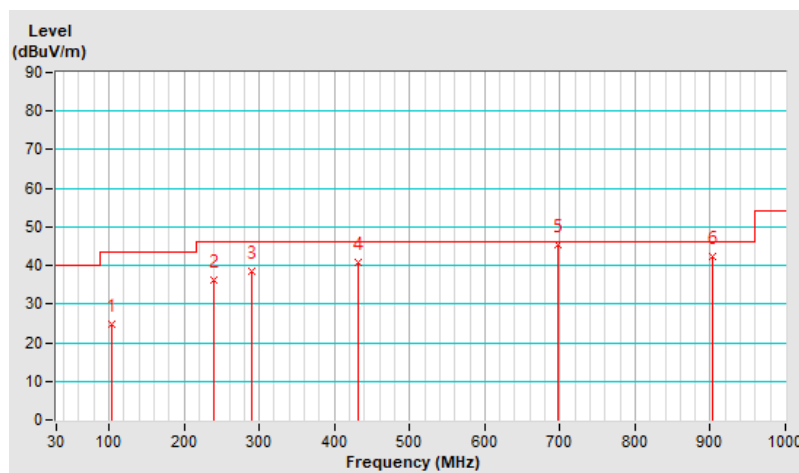


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.81	28.4 QP	40.0	-11.6	1.50 V	266	42.3	-13.9
2	100.10	34.5 QP	43.5	-9.0	3.00 V	336	51.9	-17.4
3	216.71	41.1 QP	46.0	-4.9	1.00 V	145	57.6	-16.5
4	241.19	29.0 QP	46.0	-17.0	1.00 V	20	43.6	-14.6
5	287.81	38.1 QP	46.0	-7.9	1.50 V	275	50.9	-12.8
6	693.37	34.2 QP	46.0	-11.8	1.50 V	45	38.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

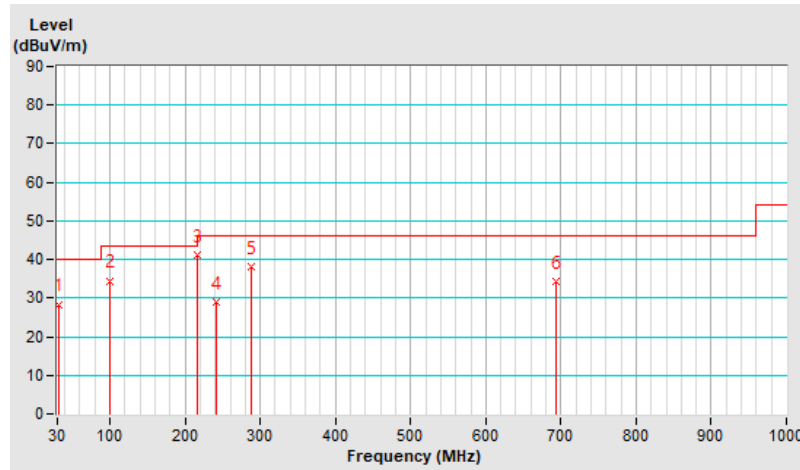


For 2S2T

RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.47	25.0 QP	43.5	-18.5	1.50 H	323	41.6	-16.6
2	239.83	35.9 QP	46.0	-10.1	1.50 H	235	50.6	-14.7
3	287.97	38.0 QP	46.0	-8.0	3.00 H	281	50.8	-12.8
4	436.20	40.9 QP	46.0	-5.1	1.00 H	335	49.6	-8.7
5	696.56	44.9 QP	46.0	-1.1	1.00 H	271	48.9	-4.0
6	904.45	41.5 QP	46.0	-4.5	1.00 H	258	42.6	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

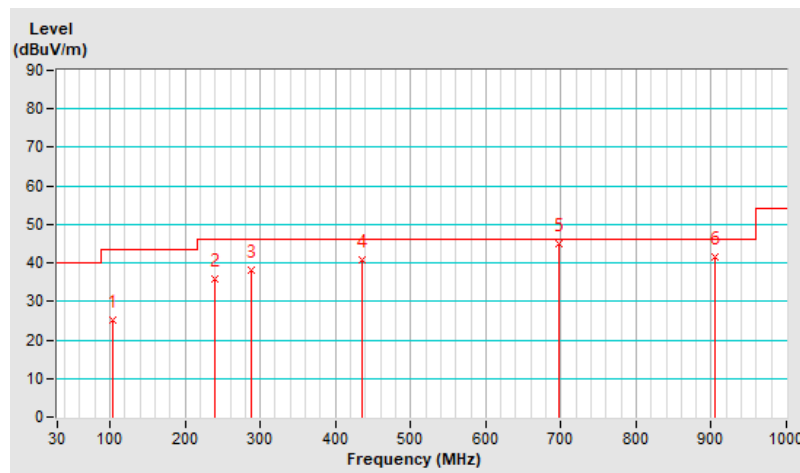


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.19	30.5 QP	40.0	-9.5	1.00 V	268	44.4	-13.9
2	102.86	34.6 QP	43.5	-8.9	1.50 V	320	51.5	-16.9
3	214.32	42.9 QP	43.5	-0.6	1.00 V	131	59.4	-16.5
4	240.84	29.5 QP	46.0	-16.5	3.00 V	51	44.1	-14.6
5	287.66	38.5 QP	46.0	-7.5	2.00 V	247	51.3	-12.8
6	693.87	34.9 QP	46.0	-11.1	1.50 V	50	38.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

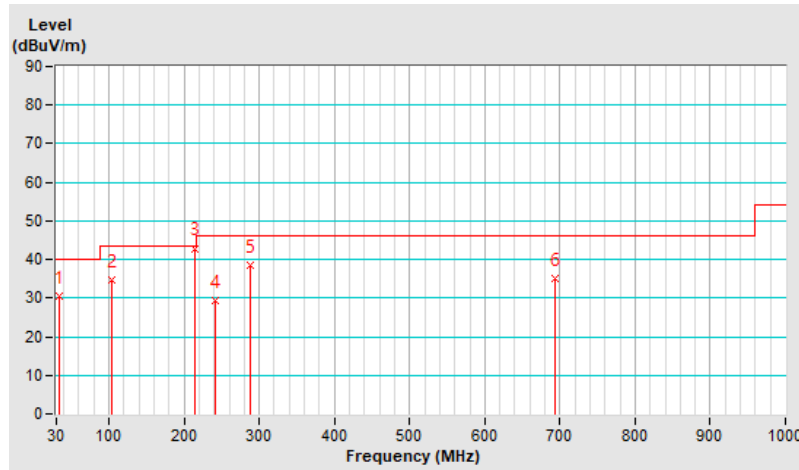

7.7 Unwanted Emissions above 1 GHz

Mode A

For 1TX

Conducted Unwanted Emissions



RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5175.66	53.31 PK	68.26	-14.95	-46.87	4.92	-41.95
2	4676.32	43.19 AV	54	-10.81	-56.99	4.92	-52.07
3	11660	53.63 PK	74	-20.37	-46.55	4.92	-41.63
4	10690.13	41.4 AV	54	-12.6	-58.78	4.92	-53.86
5	19854.2	56.16 PK	74	-17.84	-44.02	4.92	-39.1
6	19351.8	43.47 AV	54	-10.53	-56.71	4.92	-51.79
7	22328.8	56.5 PK	74	-17.5	-43.68	4.92	-38.76
8	22214.4	44.91 AV	54	-9.09	-55.27	4.92	-50.35
9	38681.16	49.27 PK	74	-24.73	-50.91	4.92	-45.99
10	38784.18	38.43 AV	54	-15.57	-61.75	4.92	-56.83

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

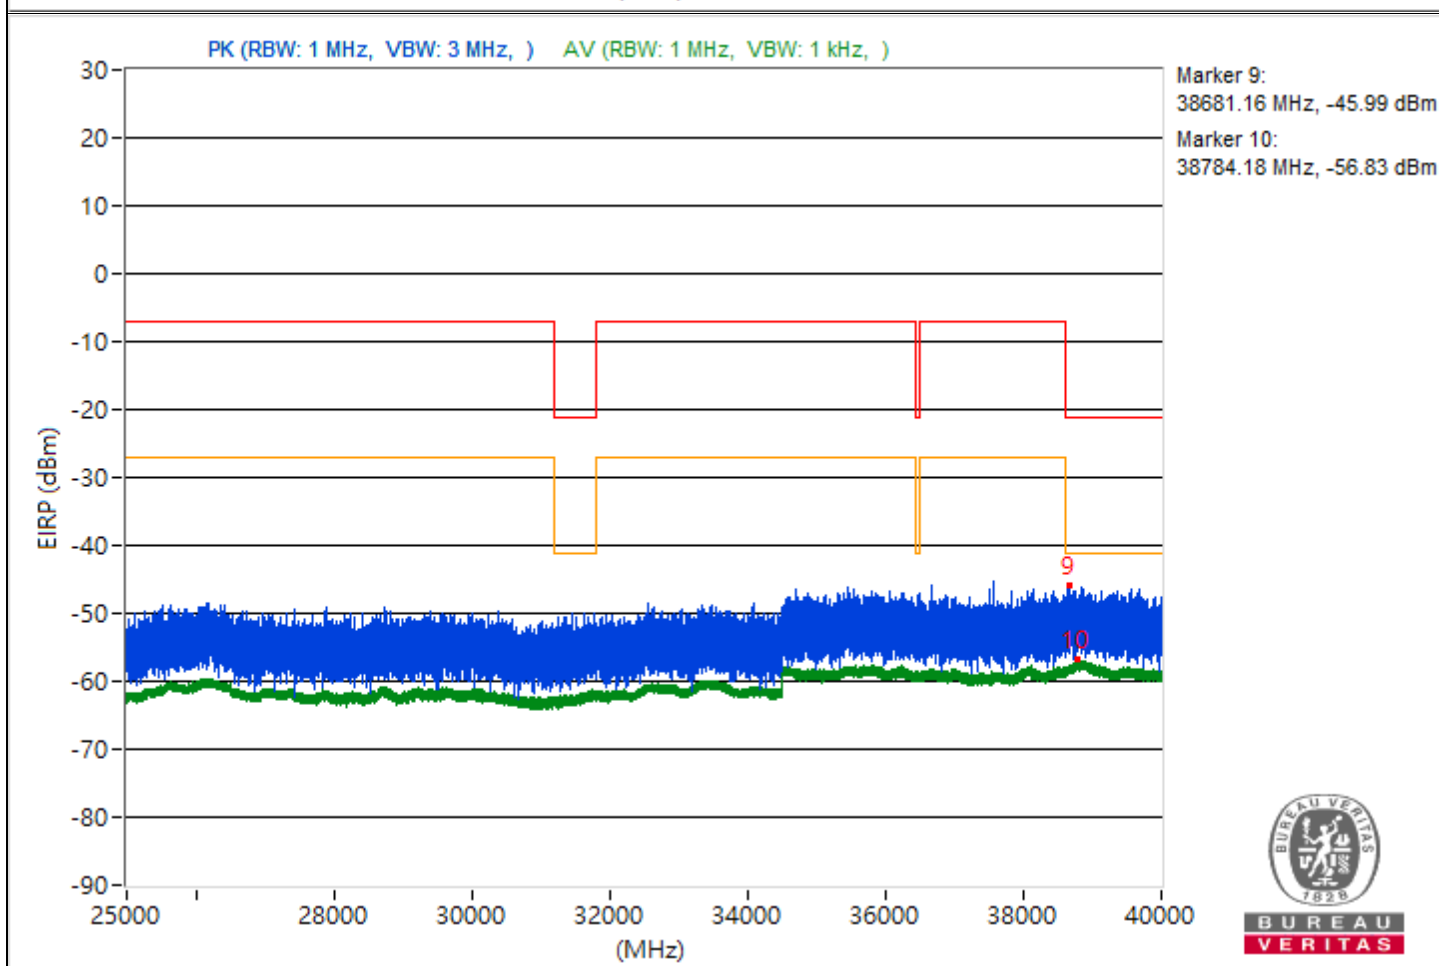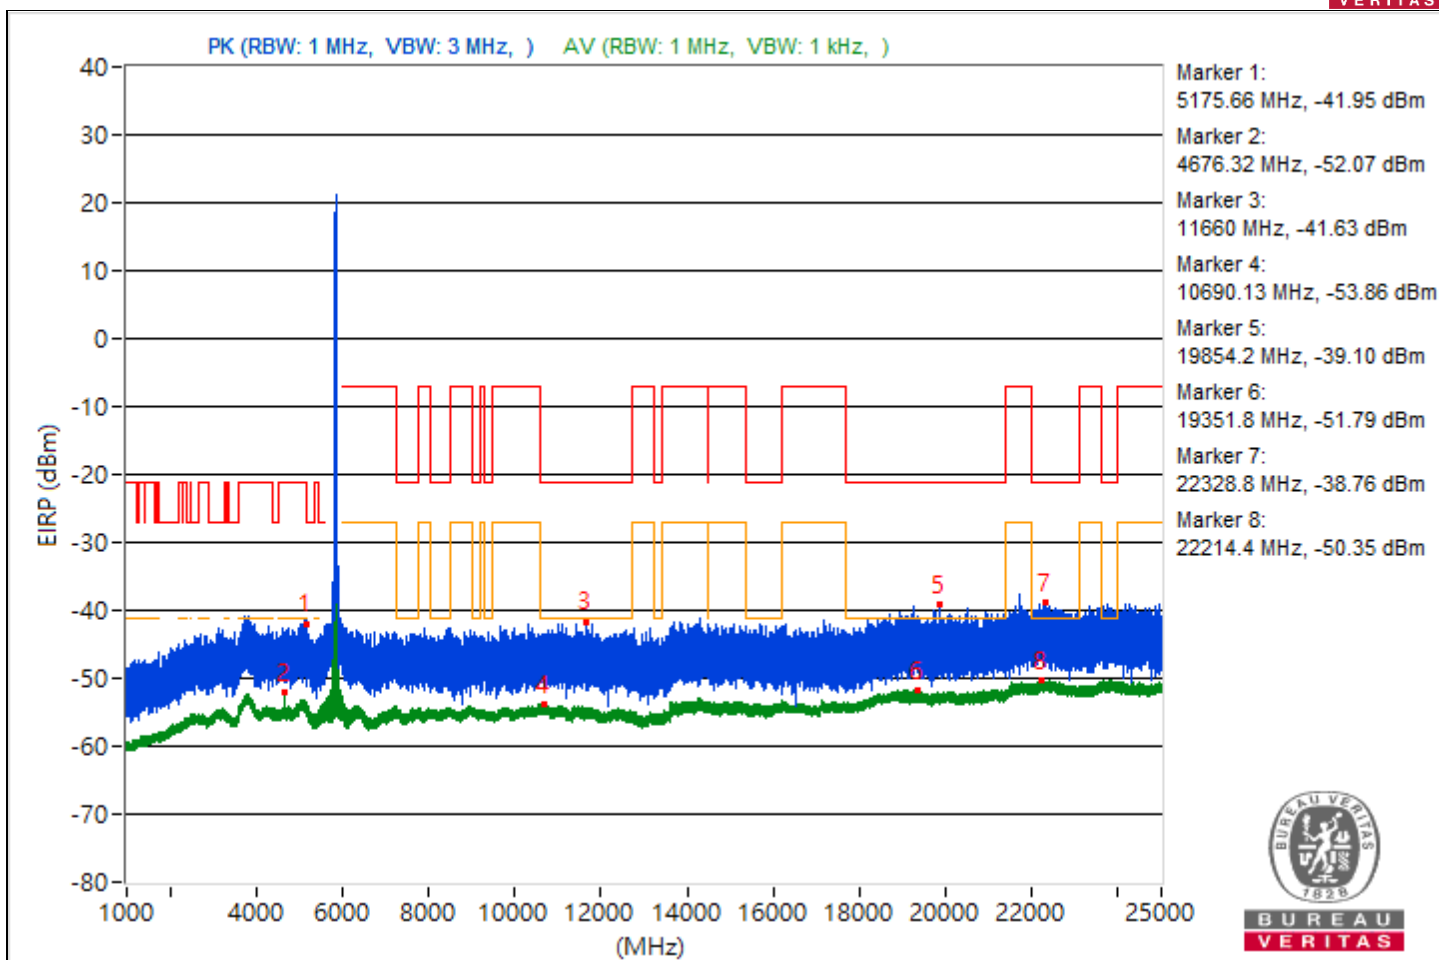





RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4422.77	53.12 PK	68.26	-15.14	-47.06	4.92	-42.14
2	3791.76	42.72 AV	54	-11.28	-57.46	4.92	-52.54
3	11523.64	53.69 PK	74	-20.31	-46.49	4.92	-41.57
4	10700.71	41.33 AV	54	-12.67	-58.85	4.92	-53.93
5	19014.6	55.3 PK	74	-18.7	-44.88	4.92	-39.96
6	19294.5	43.64 AV	54	-10.36	-56.54	4.92	-51.62
7	22185.9	56.72 PK	74	-17.28	-43.46	4.92	-38.54
8	22201	45.02 AV	54	-8.98	-55.16	4.92	-50.24
9	38781.33	50.04 PK	74	-23.96	-50.14	4.92	-45.22
10	38840.71	38.45 AV	54	-15.55	-61.73	4.92	-56.81

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

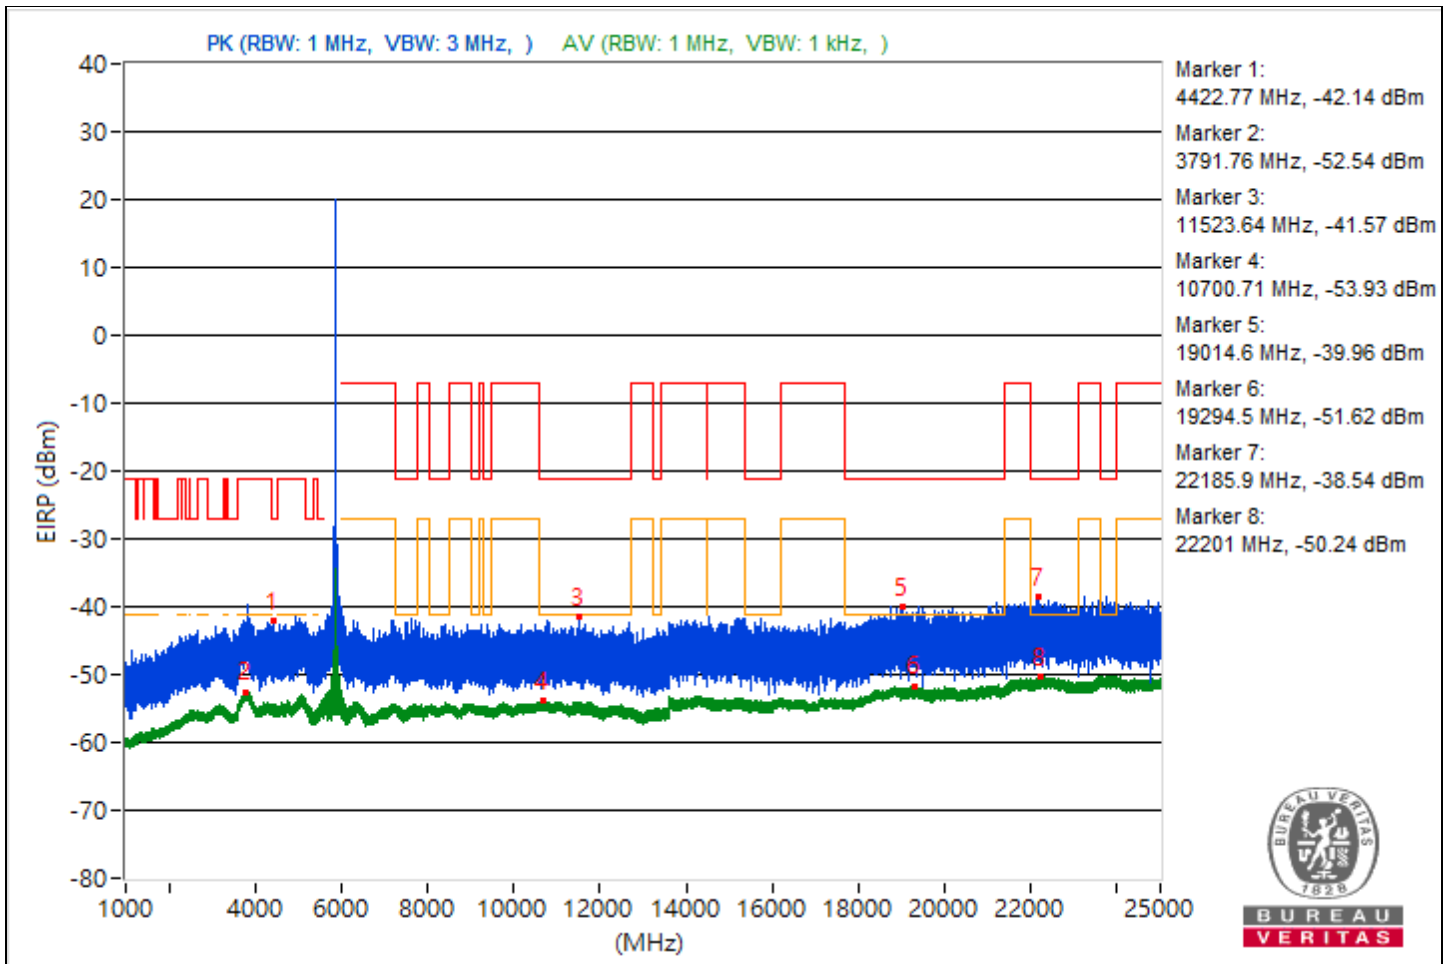

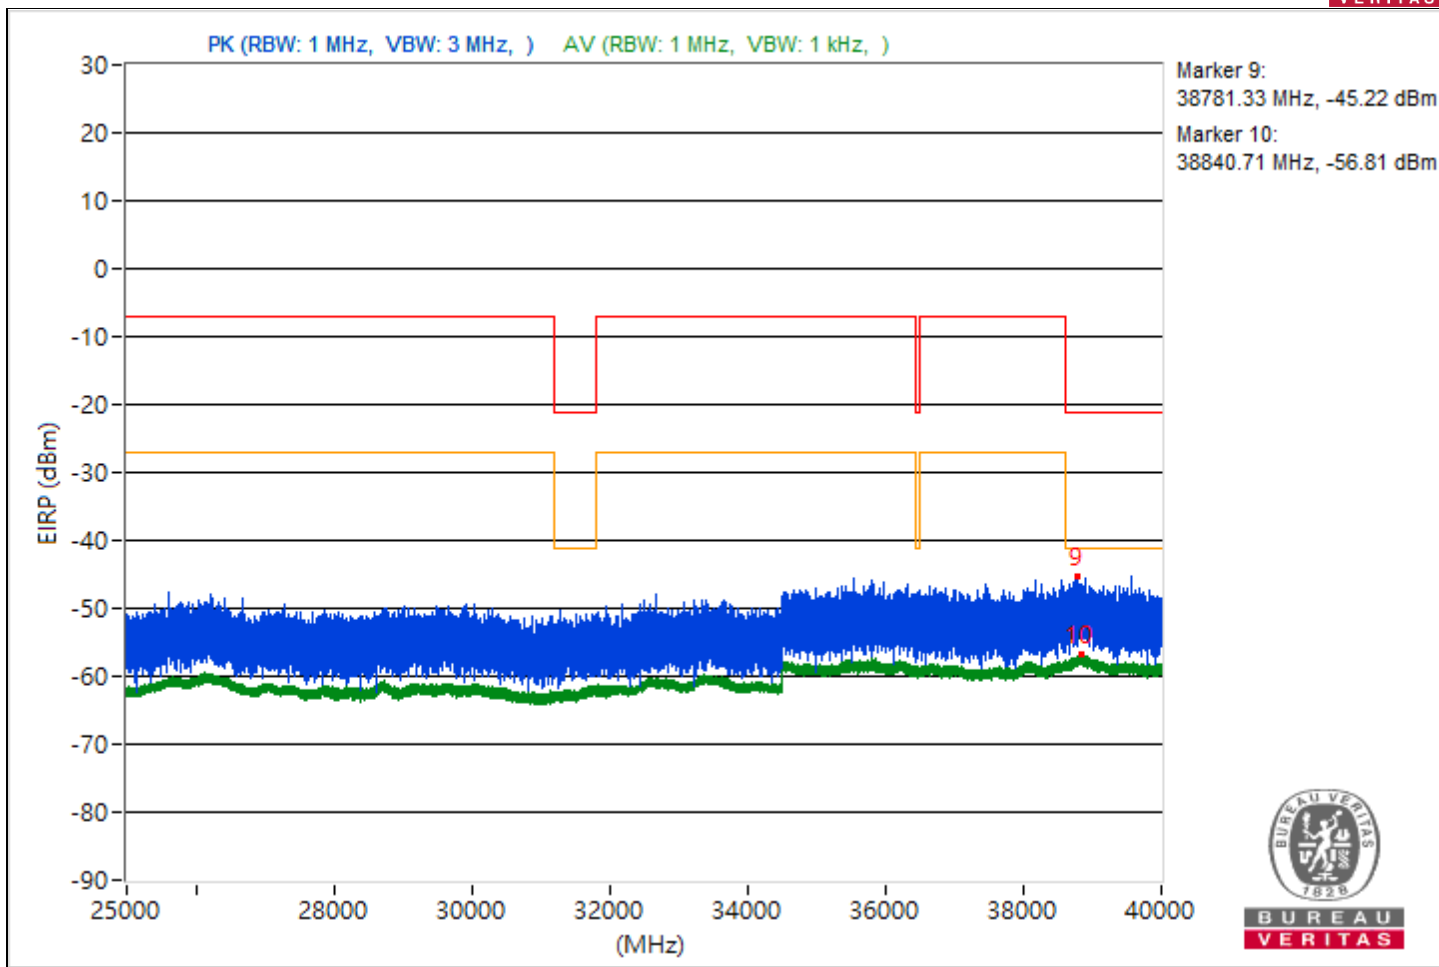



RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5158.47	53.08 PK	68.26	-15.18	-47.1	4.92	-42.18
2	4708.29	43.24 AV	54	-10.76	-56.94	4.92	-52.02
3	10705.78	53.99 PK	74	-20.01	-46.19	4.92	-41.27
4	10722.84	41.28 AV	54	-12.72	-58.9	4.92	-53.98
5	19139.4	55.73 PK	74	-18.27	-44.45	4.92	-39.53
6	19288	43.5 AV	54	-10.5	-56.68	4.92	-51.76
7	22239.8	57.47 PK	74	-16.53	-42.71	4.92	-37.79
8	22295	44.93 AV	54	-9.07	-55.25	4.92	-50.33
9	38912.98	49.91 PK	74	-24.09	-50.27	4.92	-45.35
10	38886.4	38.36 AV	54	-15.64	-61.82	4.92	-56.9

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

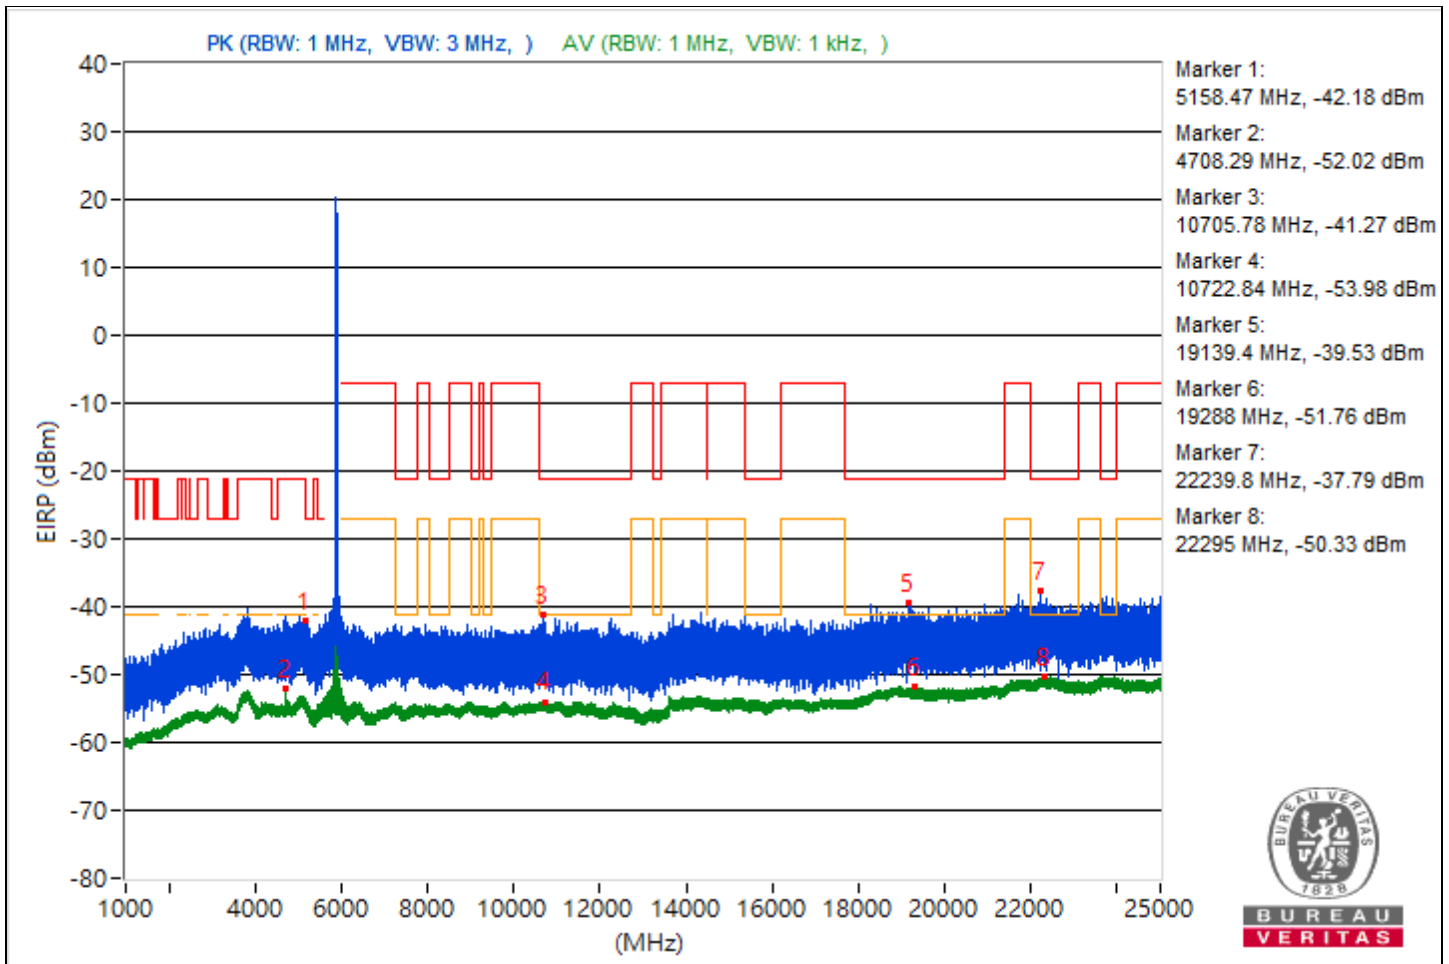

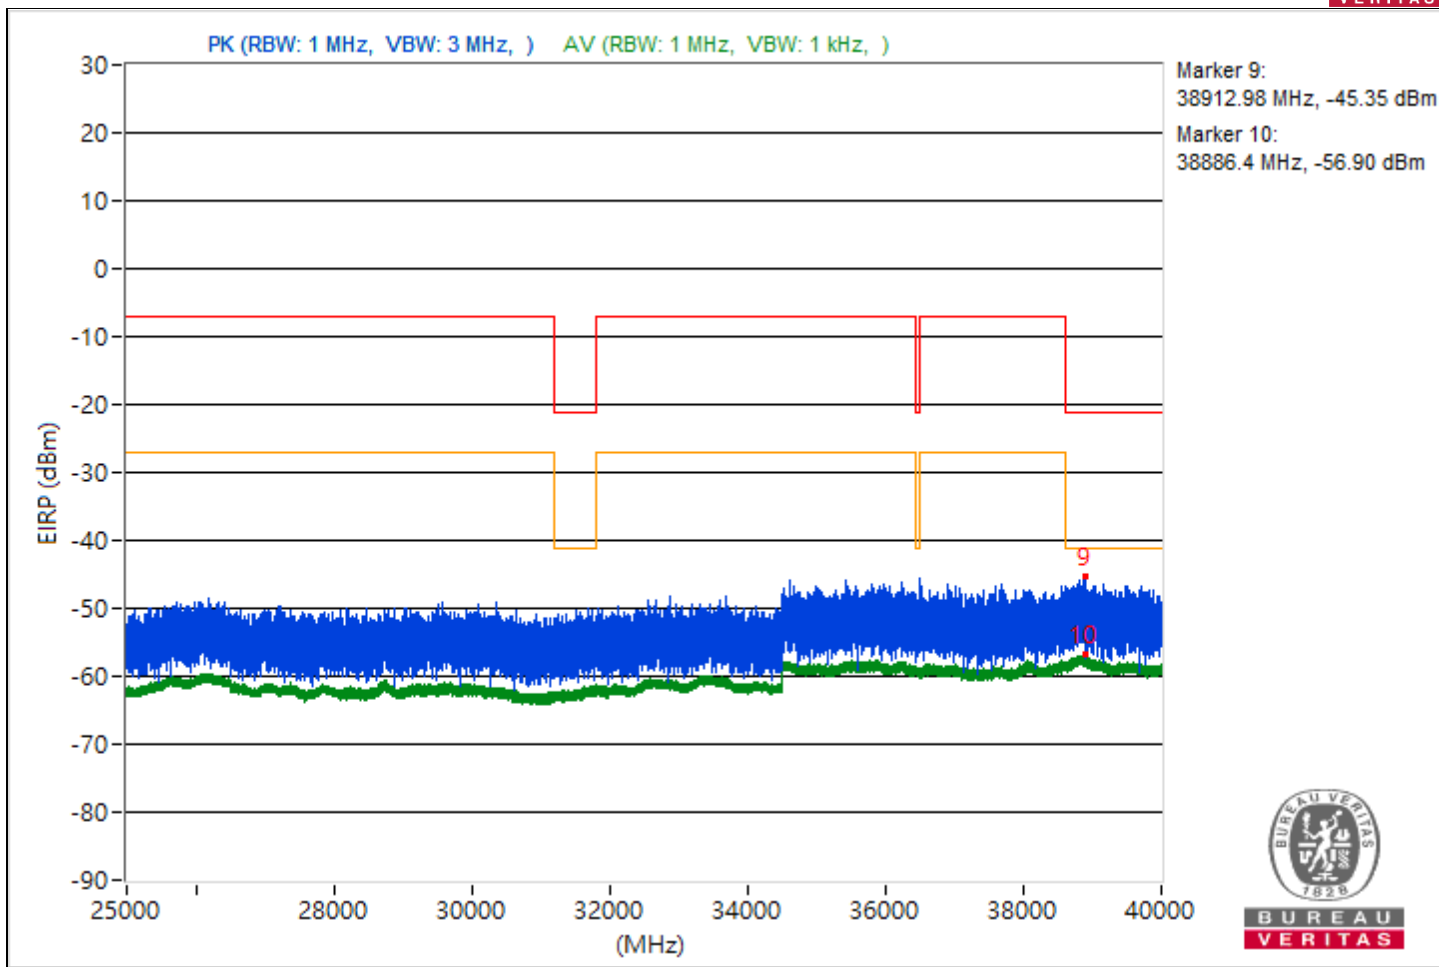




Conducted Band Edges

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5846.71	116.06 PK			15.88	4.92	20.8
2	#5600.85	61.55 PK	68.26	-6.71	-38.63	4.92	-33.71
3	#5668.48	61.51 PK	81.94	-20.43	-38.67	4.92	-33.75
4	#5711.67	62 PK	108.53	-46.53	-38.18	4.92	-33.26
5	#5721.12	61.84 PK	113.41	-51.57	-38.34	4.92	-33.42
6	#5898.03	64.25 PK	108.04	-43.79	-35.93	4.92	-31.01
7	#5990.47	62.77 PK	88.26	-25.49	-37.41	4.92	-32.49
8	*5844.48	107.14 AV			6.96	4.92	11.88
9	#5896.23	52.96 AV	89.36	-36.4	-47.22	4.92	-42.3
10	#5926.35	51.01 AV	68.26	-17.25	-49.17	4.92	-44.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

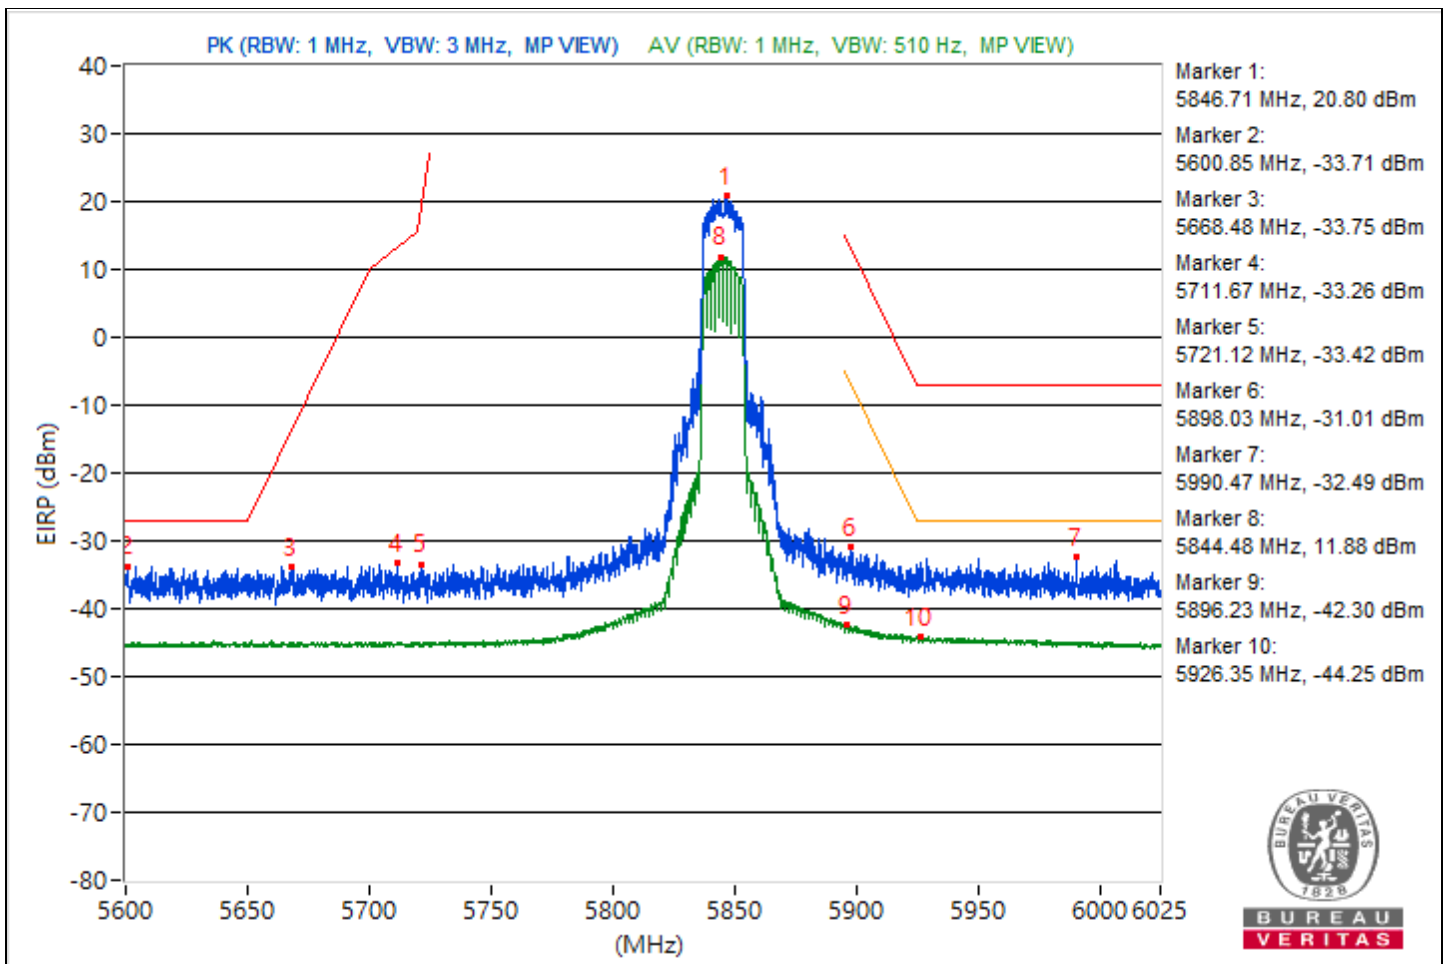


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5866.16	115.77 PK			15.59	4.92	20.51
2	#5629.01	62.86 PK	68.26	-5.4	-37.32	4.92	-32.4
3	#5677.14	62.55 PK	88.34	-25.79	-37.63	4.92	-32.71
4	#5712.31	62.5 PK	108.71	-46.21	-37.68	4.92	-32.76
5	#5723.94	61.94 PK	119.84	-57.9	-38.24	4.92	-33.32
6	#5900.79	66.56 PK	106.01	-39.45	-33.62	4.92	-28.7
7	#5938.46	63.19 PK	88.26	-25.07	-36.99	4.92	-32.07
8	*5866.26	107.11 AV			6.93	4.92	11.85
9	#5896.07	55.44 AV	89.48	-34.04	-44.74	4.92	-39.82
10	#5925.6	51.8 AV	68.26	-16.46	-48.38	4.92	-43.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

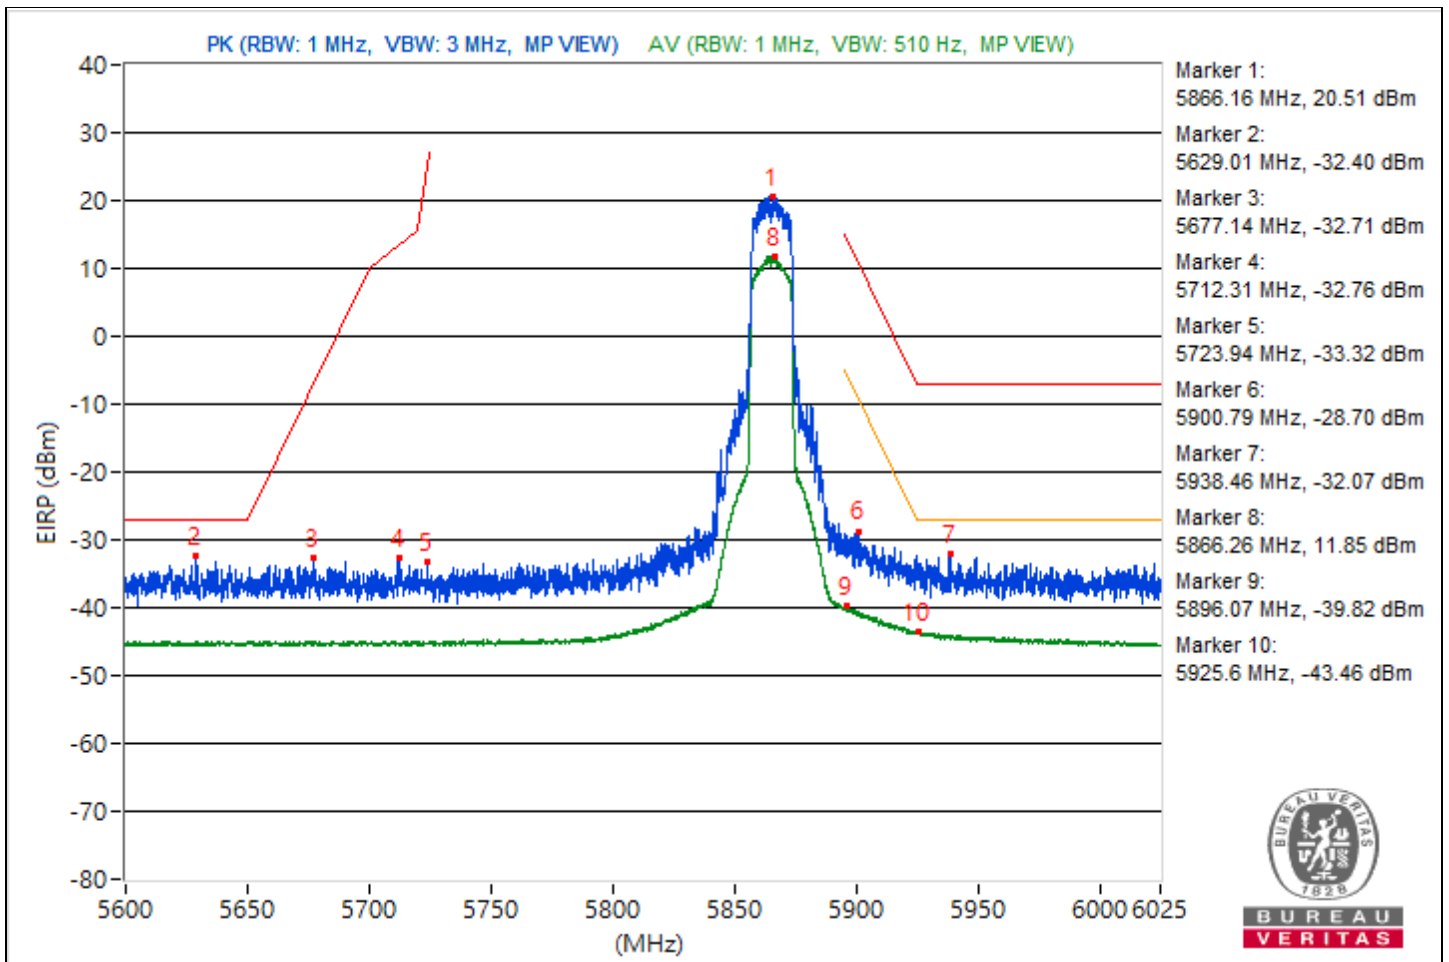




RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.29	116.48 PK			16.3	4.92	21.22
2	#5610.52	61.92 PK	68.26	-6.34	-38.26	4.92	-33.34
3	#5694.19	62.45 PK	100.96	-38.51	-37.73	4.92	-32.81
4	#5714.8	61.11 PK	109.4	-48.29	-39.07	4.92	-34.15
5	#5722.93	60.16 PK	117.54	-57.38	-40.02	4.92	-35.1
6	#5895.43	93.72 PK	109.94	-16.22	-6.46	4.92	-1.54
7	#5925.18	64.09 PK	88.26	-24.17	-36.09	4.92	-31.17
8	*5884.27	107.44 AV			7.26	4.92	12.18
9	#5895	77.79 AV	90.26	-12.47	-22.39	4.92	-17.47
10	#5926.08	51.9 AV	68.26	-16.36	-48.28	4.92	-43.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

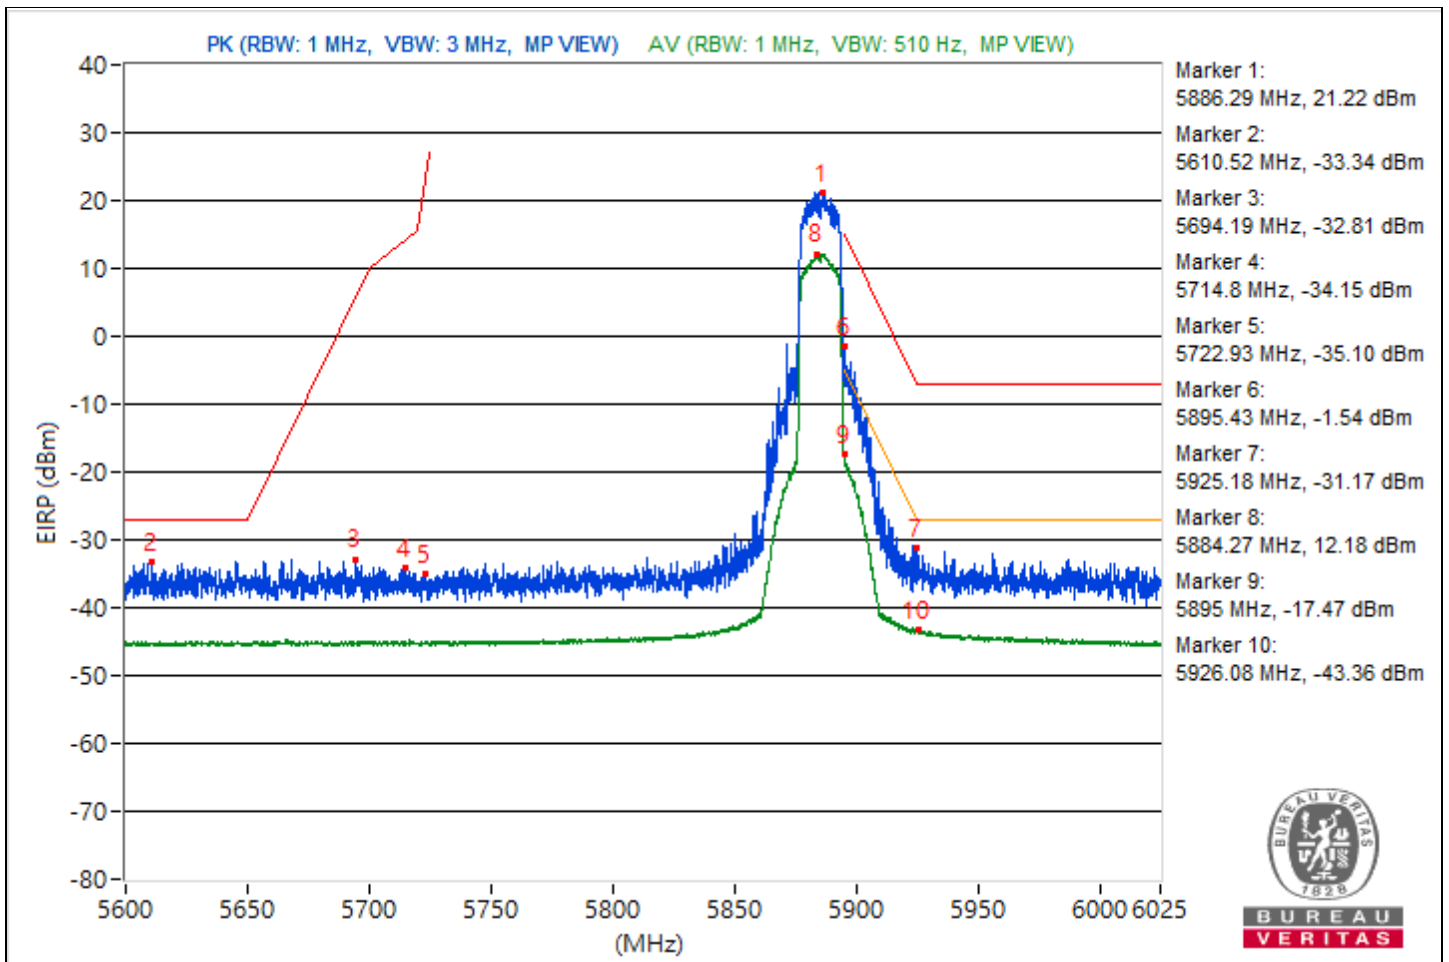


For 1S1T
Conducted Unwanted Emissions


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5596.67	53.92 PK	68.26	-14.34	-46.26	4.92	-41.34
2	3818.12	42.65 AV	54	-11.35	-57.53	4.92	-52.61
3	10807.11	54.09 PK	74	-19.91	-46.09	4.92	-41.17
4	11005.96	41.25 AV	54	-12.75	-58.93	4.92	-54.01
5	18911.8	55.23 PK	74	-18.77	-44.95	4.92	-40.03
6	19121.7	43.46 AV	54	-10.54	-56.72	4.92	-51.8
7	22251	56.38 PK	74	-17.62	-43.8	4.92	-38.88
8	23672.1	45.41 AV	54	-8.59	-54.77	4.92	-49.85
9	38828.8	49.62 PK	74	-24.38	-50.56	4.92	-45.64
10	38837.51	38.32 AV	54	-15.68	-61.86	4.92	-56.94

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

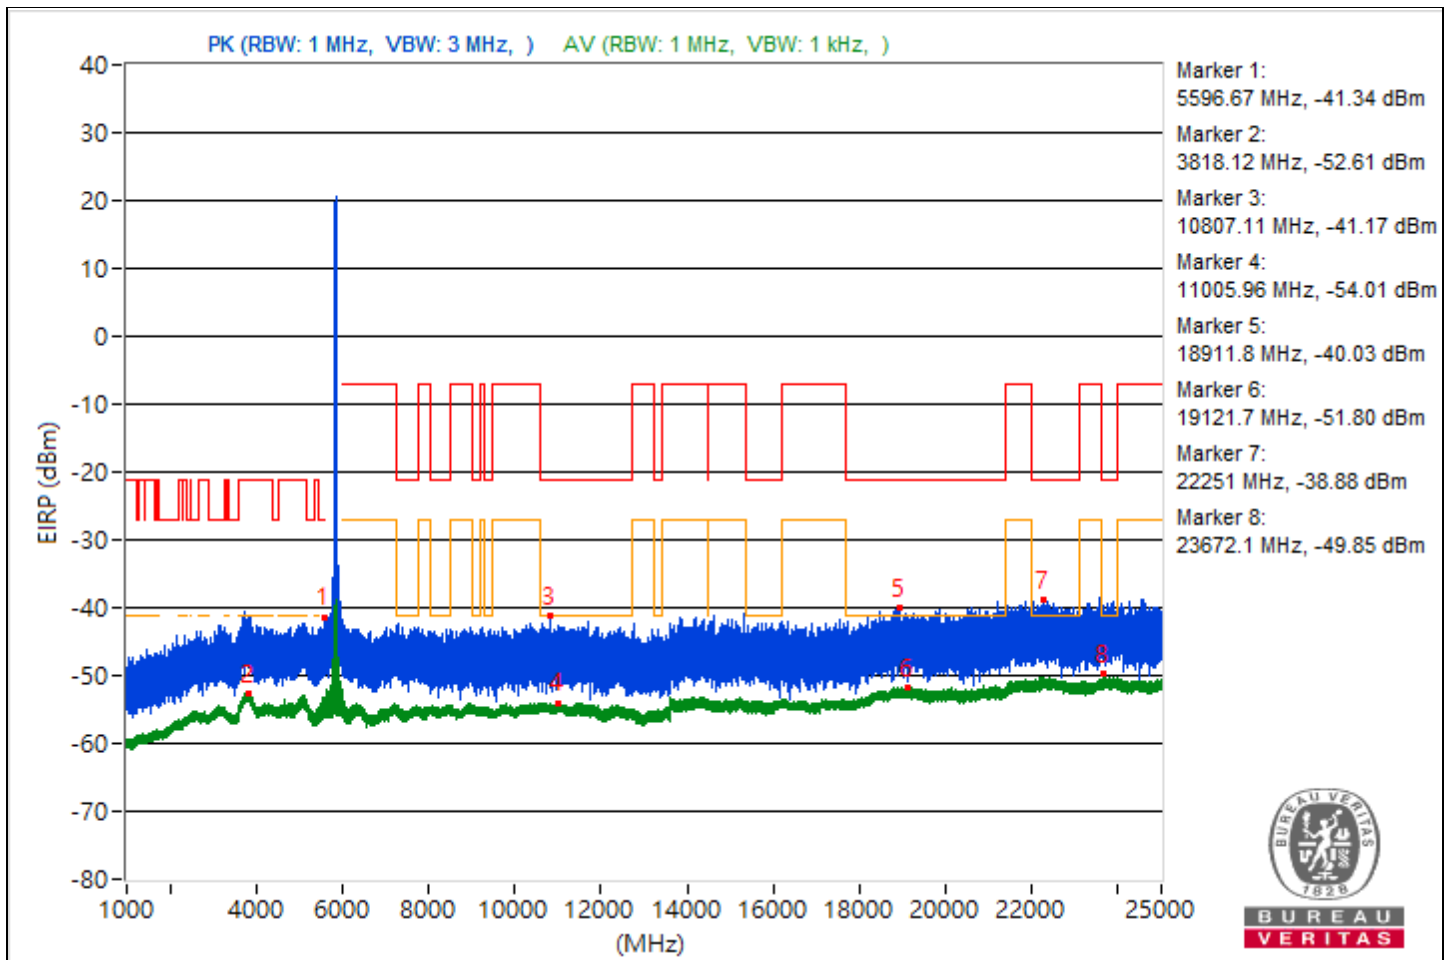

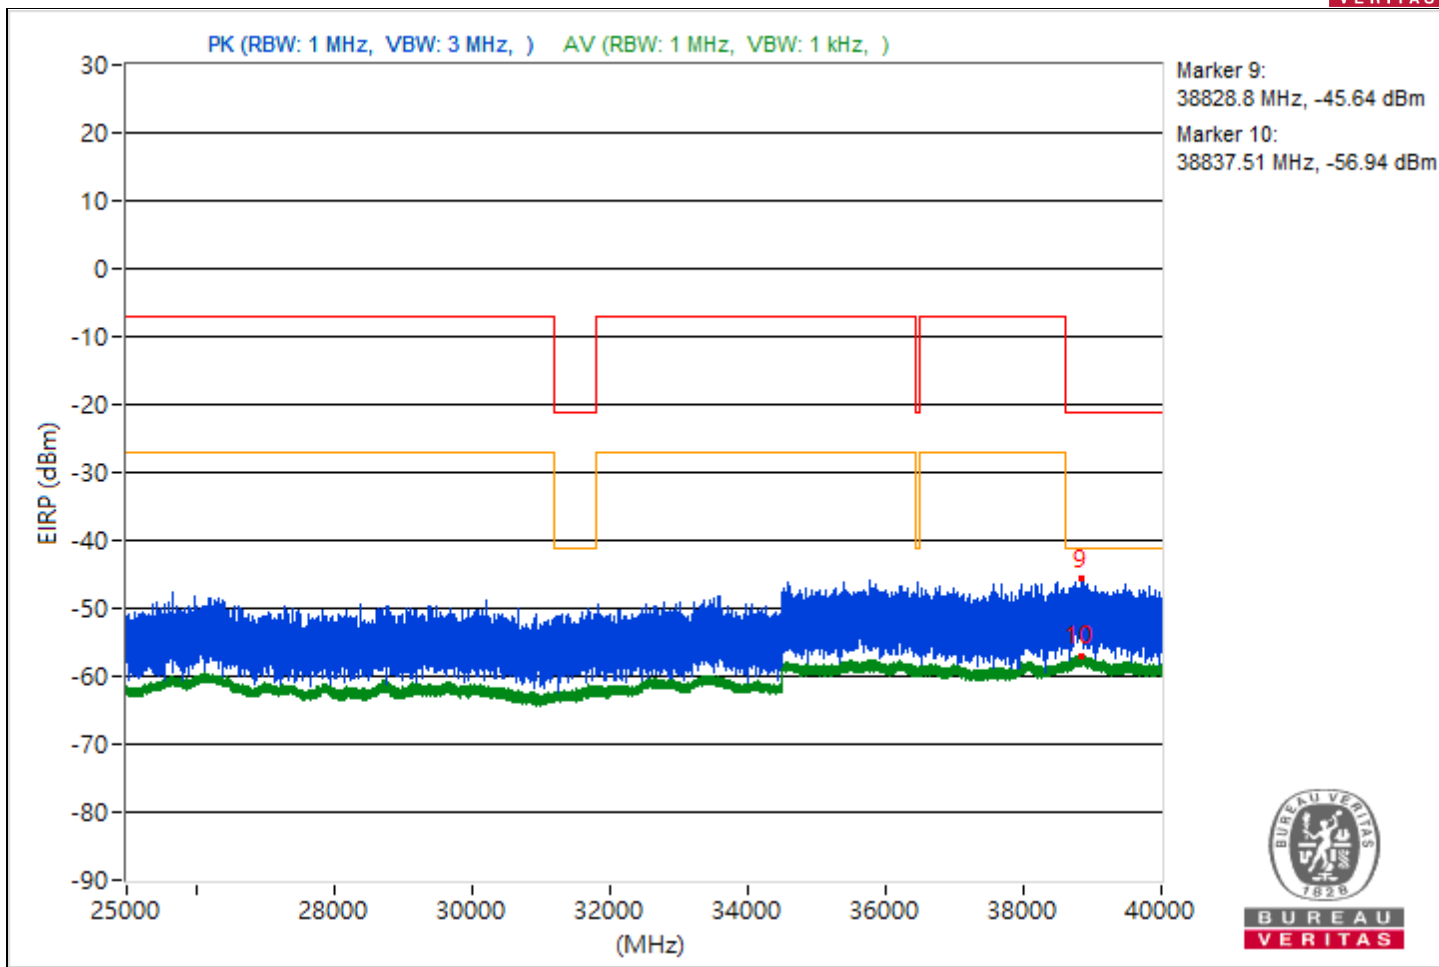



RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5174.49	52.87 PK	68.26	-15.39	-47.31	4.92	-42.39
2	3776.67	42.85 AV	54	-11.15	-57.33	4.92	-52.41
3	10776.98	53.62 PK	74	-20.38	-46.56	4.92	-41.64
4	10699.56	41.24 AV	54	-12.76	-58.94	4.92	-54.02
5	19456.8	54.7 PK	74	-19.3	-45.48	4.92	-40.56
6	18906.7	43.43 AV	54	-10.57	-56.75	4.92	-51.83
7	22220.5	57.17 PK	74	-16.83	-43.01	4.92	-38.09
8	23667.3	45.06 AV	54	-8.94	-55.12	4.92	-50.2
9	39785.69	49.6 PK	74	-24.4	-50.58	4.92	-45.66
10	38865.78	38.37 AV	54	-15.63	-61.81	4.92	-56.89

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

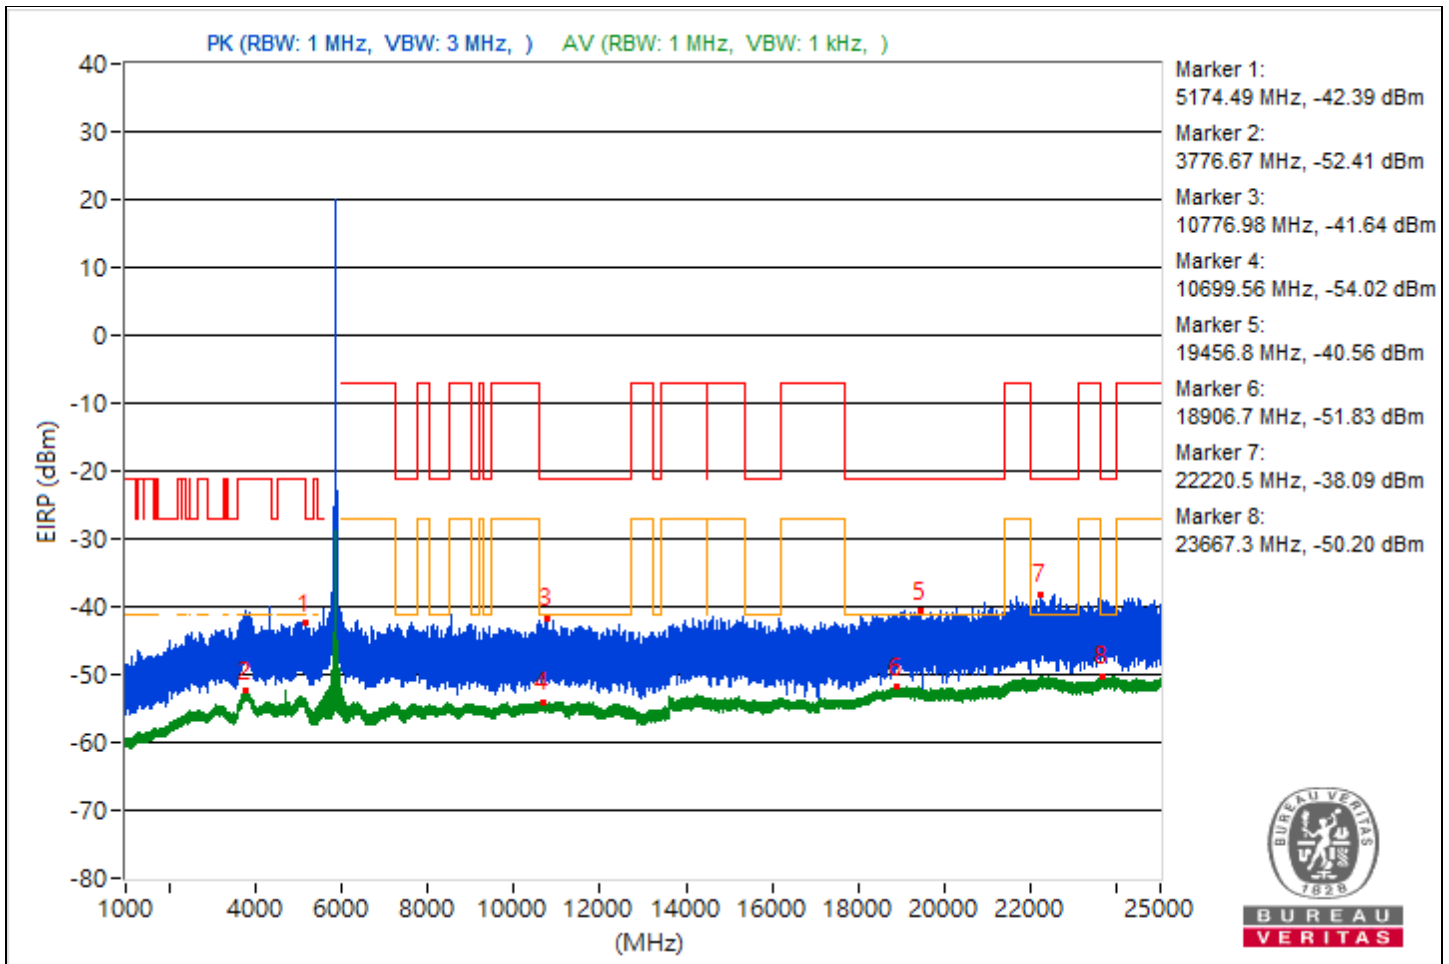

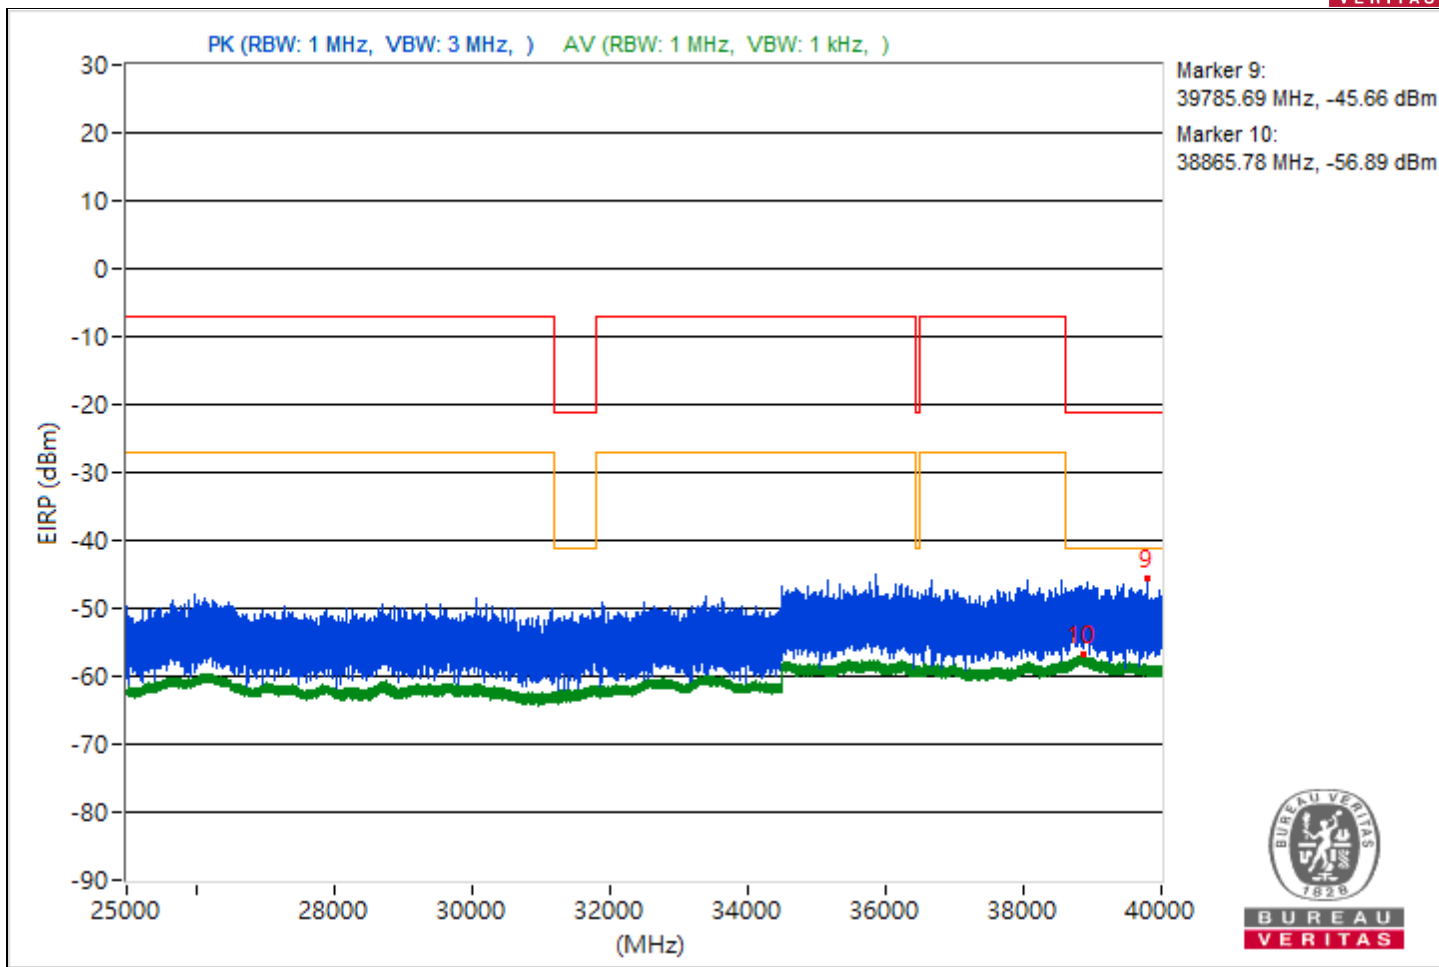





RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5153.18	54.4 PK	68.26	-13.86	-45.78	4.92	-40.86
2	4708.13	43.67 AV	54	-10.33	-56.51	4.92	-51.59
3	8481.6	52.94 PK	74	-21.06	-47.24	4.92	-42.32
4	10618.58	41.49 AV	54	-12.51	-58.69	4.92	-53.77
5	18369.1	54.88 PK	74	-19.12	-45.3	4.92	-40.38
6	18933.2	43.42 AV	54	-10.58	-56.76	4.92	-51.84
7	23926.7	57.72 PK	74	-16.28	-42.46	4.92	-37.54
8	23808.5	45.07 AV	54	-8.93	-55.11	4.92	-50.19
9	39320.89	49.7 PK	74	-24.3	-50.48	4.92	-45.56
10	38803.02	38.26 AV	54	-15.74	-61.92	4.92	-57

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

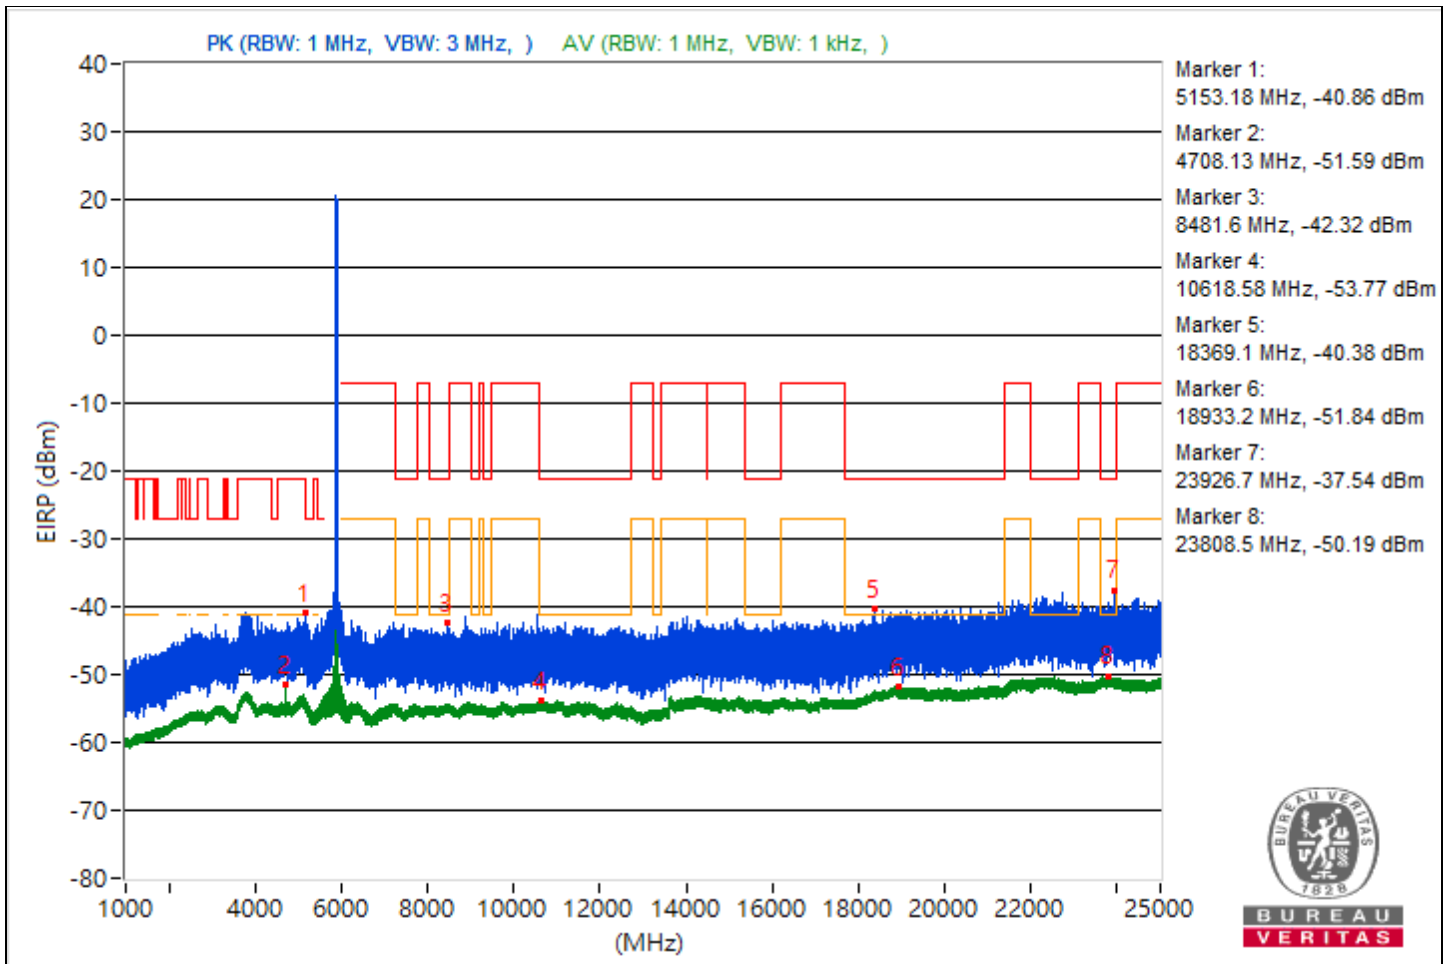

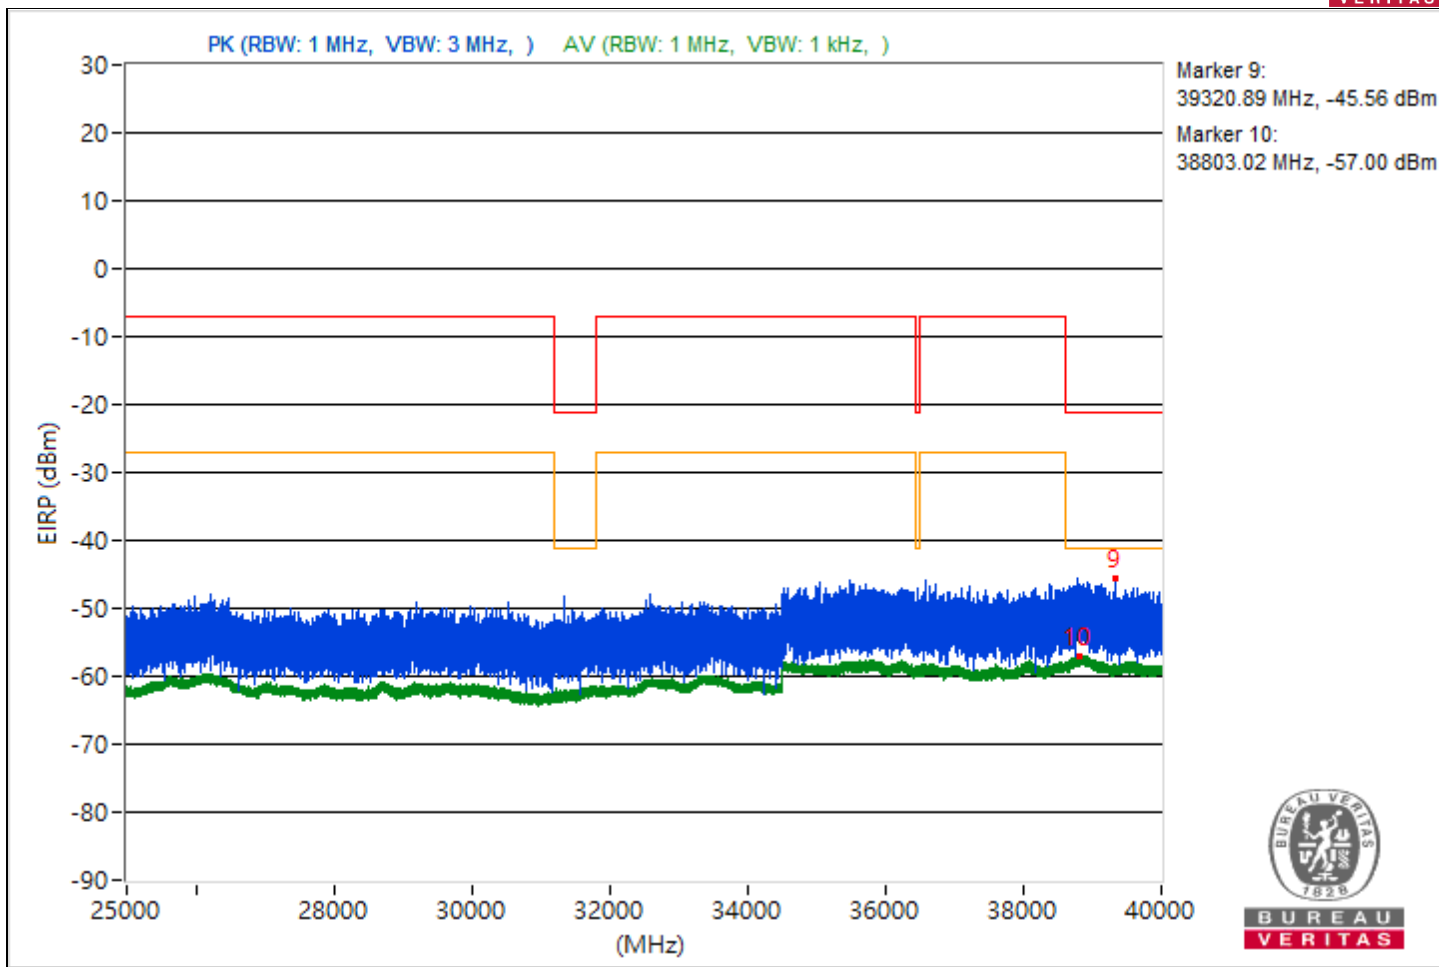





RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5582.04	53.33 PK	68.26	-14.93	-46.85	4.92	-41.93
2	3831.73	42.79 AV	54	-11.21	-57.39	4.92	-52.47
3	11767.11	53.8 PK	74	-20.2	-46.38	4.92	-41.46
4	11670.76	41.59 AV	54	-12.41	-58.59	4.92	-53.67
5	19217.3	55.09 PK	74	-18.91	-45.09	4.92	-40.17
6	19103.9	43.5 AV	54	-10.5	-56.68	4.92	-51.76
7	23718.7	56.57 PK	74	-17.43	-43.61	4.92	-38.69
8	22188.9	44.98 AV	54	-9.02	-55.2	4.92	-50.28
9	38833.16	49.56 PK	74	-24.44	-50.62	4.92	-45.7
10	38834.49	38.33 AV	54	-15.67	-61.85	4.92	-56.93

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

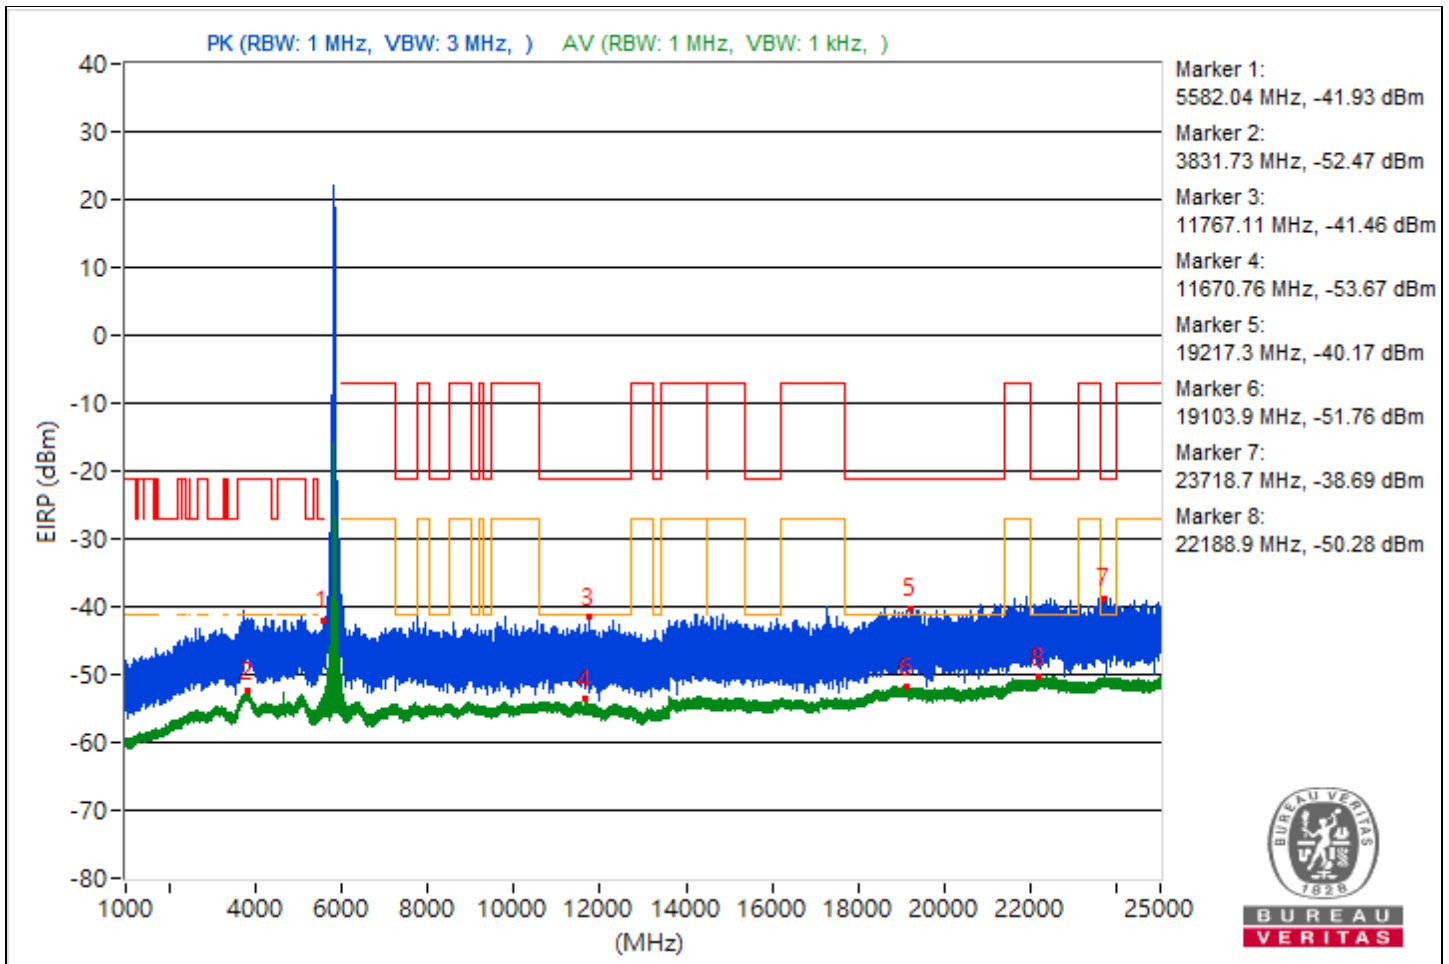

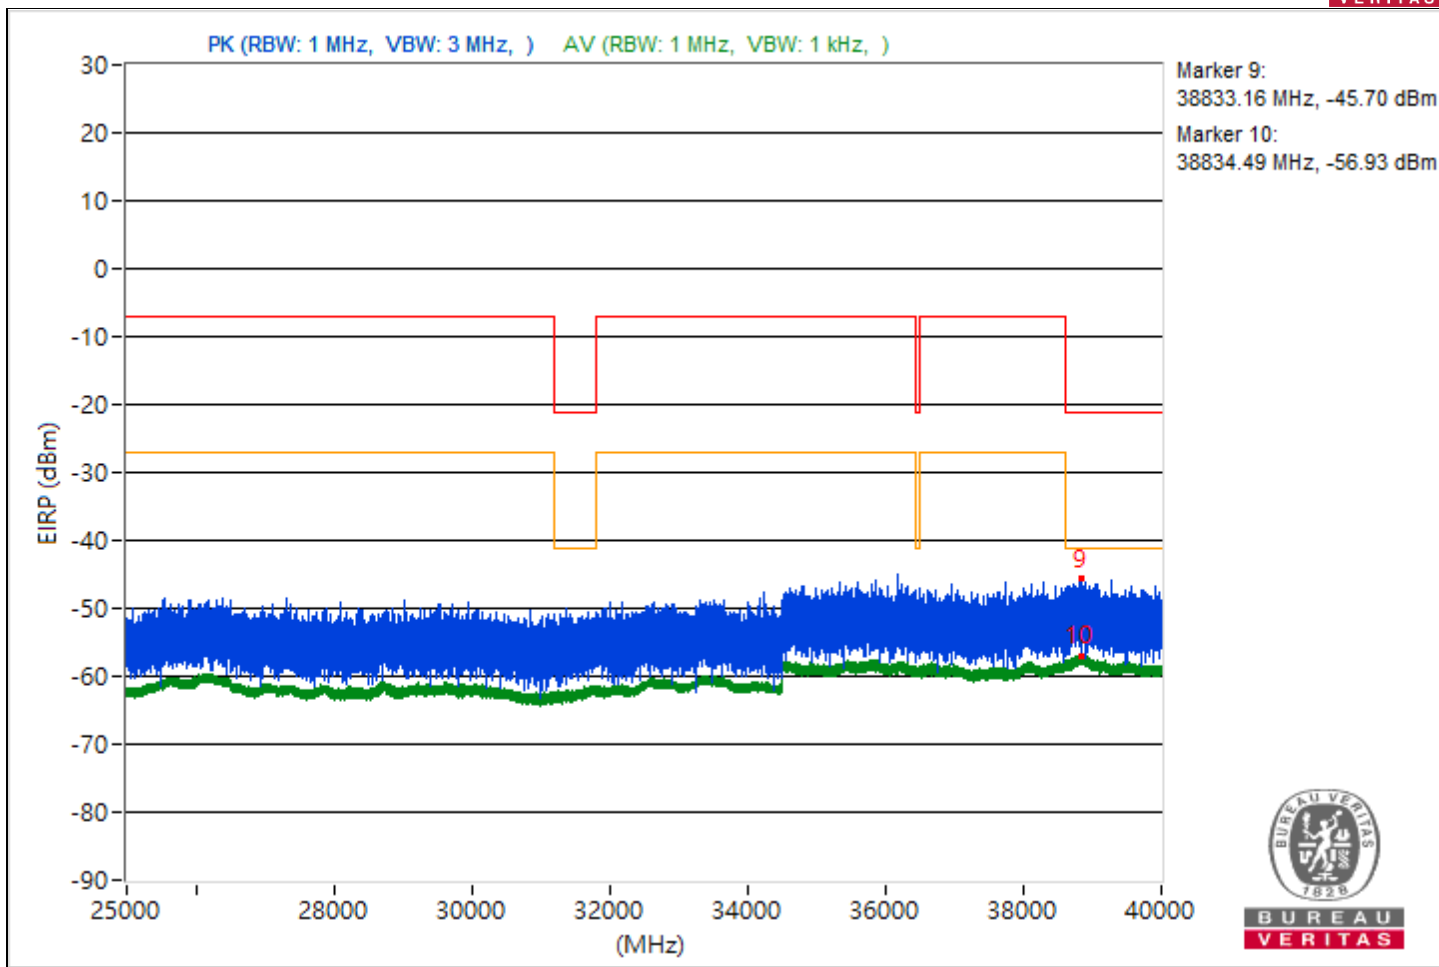





RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5540.2	53.59 PK	68.26	-14.67	-46.59	4.92	-41.67
2	4700.12	43.45 AV	54	-10.55	-56.73	4.92	-51.81
3	10780.09	53.3 PK	74	-20.7	-46.88	4.92	-41.96
4	11756.53	41.65 AV	54	-12.35	-58.53	4.92	-53.61
5	18833.9	55.57 PK	74	-18.43	-44.61	4.92	-39.69
6	18913.8	43.49 AV	54	-10.51	-56.69	4.92	-51.77
7	22592.1	57.17 PK	74	-16.83	-43.01	4.92	-38.09
8	22238.9	44.93 AV	54	-9.07	-55.25	4.92	-50.33
9	38638.22	49.32 PK	74	-24.68	-50.86	4.92	-45.94
10	38871.64	38.57 AV	54	-15.43	-61.61	4.92	-56.69

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

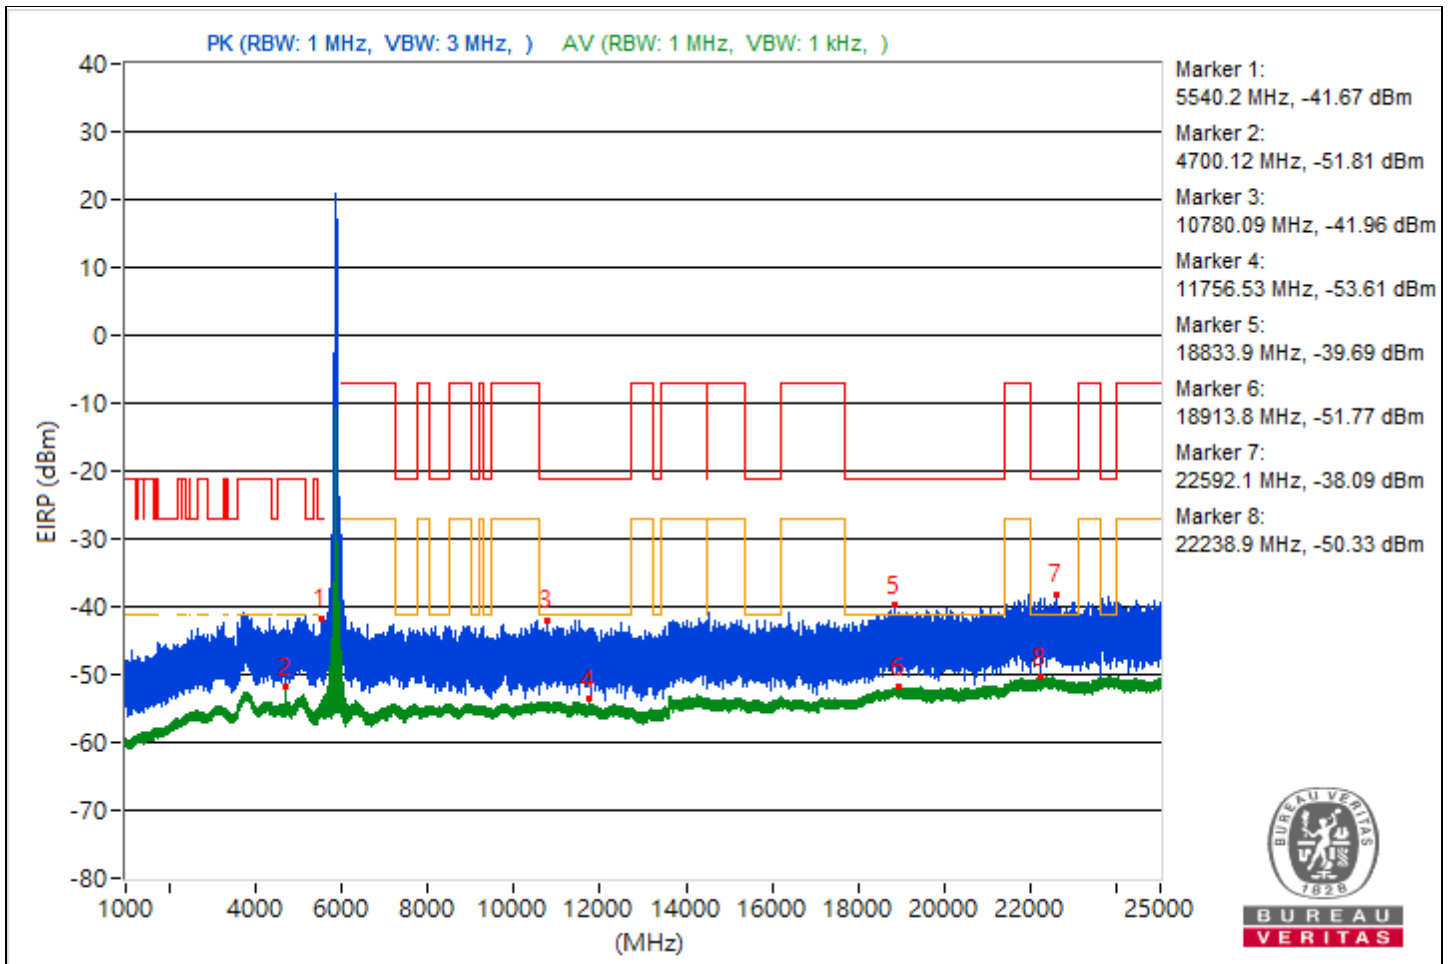

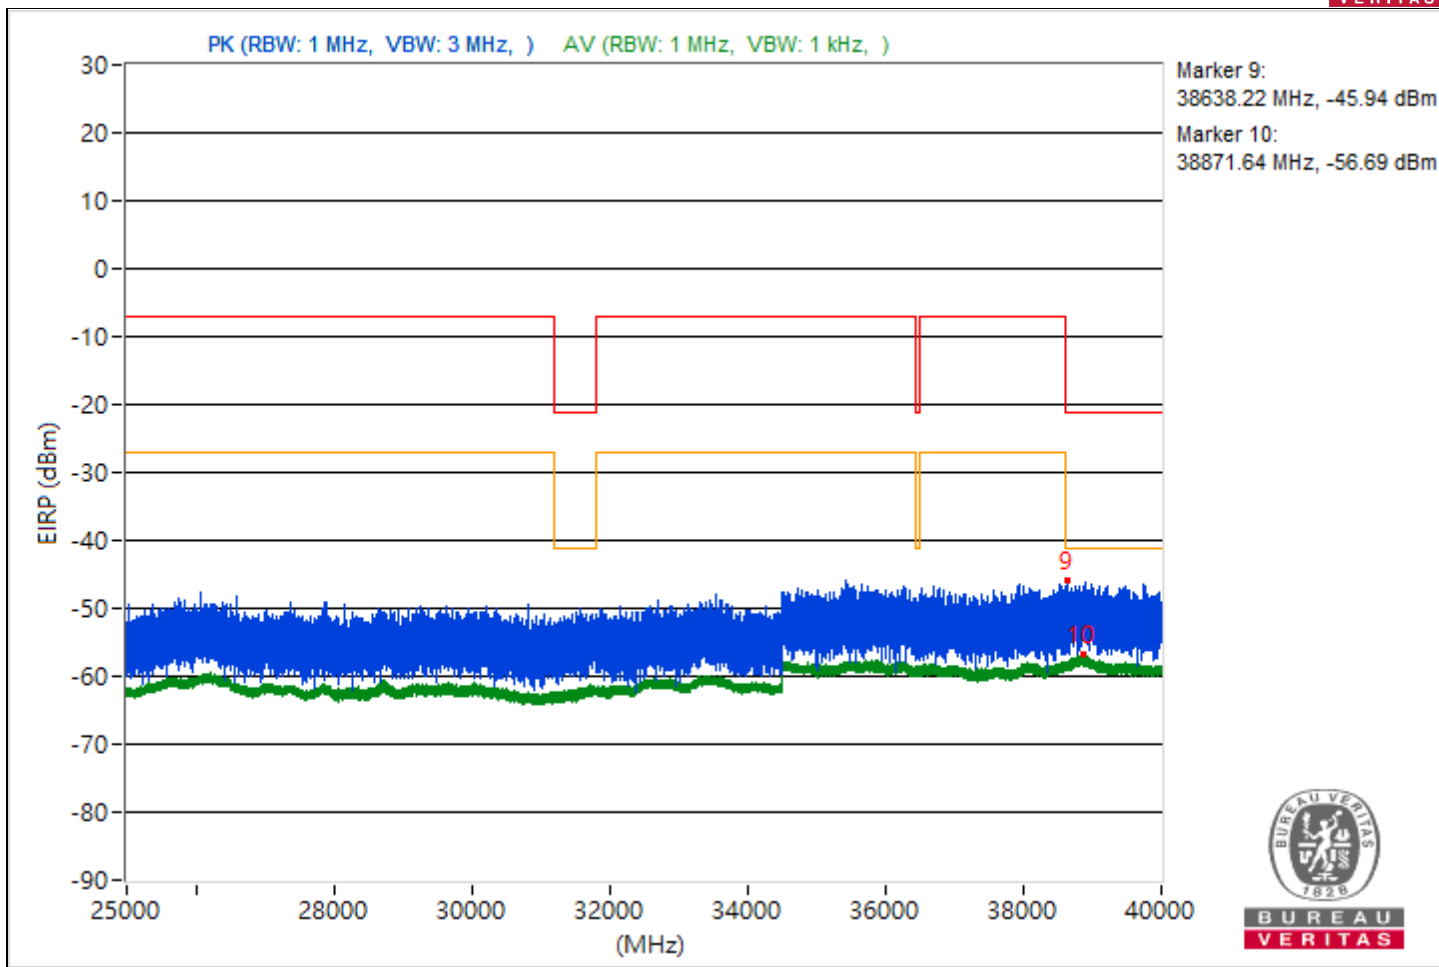





RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5231.89	53.01 PK	68.26	-15.25	-47.17	4.92	-42.25
2	4684.1	42.91 AV	54	-11.09	-57.27	4.92	-52.35
3	11687.91	53.12 PK	74	-20.88	-47.06	4.92	-42.14
4	10954.4	41.24 AV	54	-12.76	-58.94	4.92	-54.02
5	19163.9	55.37 PK	74	-18.63	-44.81	4.92	-39.89
6	18869	43.48 AV	54	-10.52	-56.7	4.92	-51.78
7	23934.7	57.81 PK	74	-16.19	-42.37	4.92	-37.45
8	22251.9	44.89 AV	54	-9.11	-55.29	4.92	-50.37
9	39796.18	49.24 PK	74	-24.76	-50.94	4.92	-46.02
10	38827.38	38.5 AV	54	-15.5	-61.68	4.92	-56.76

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

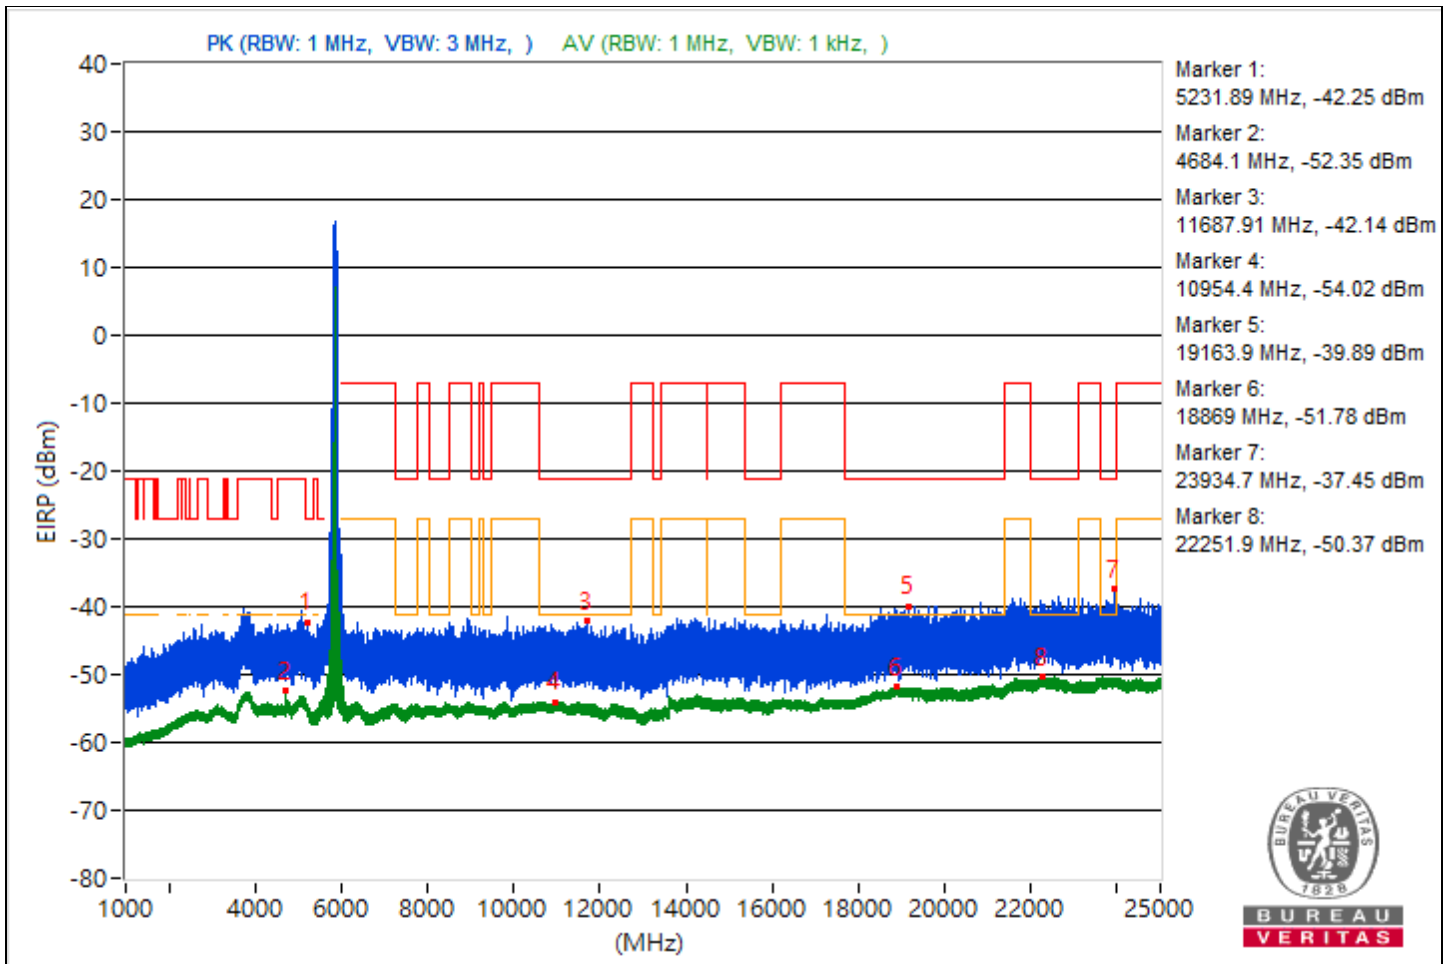

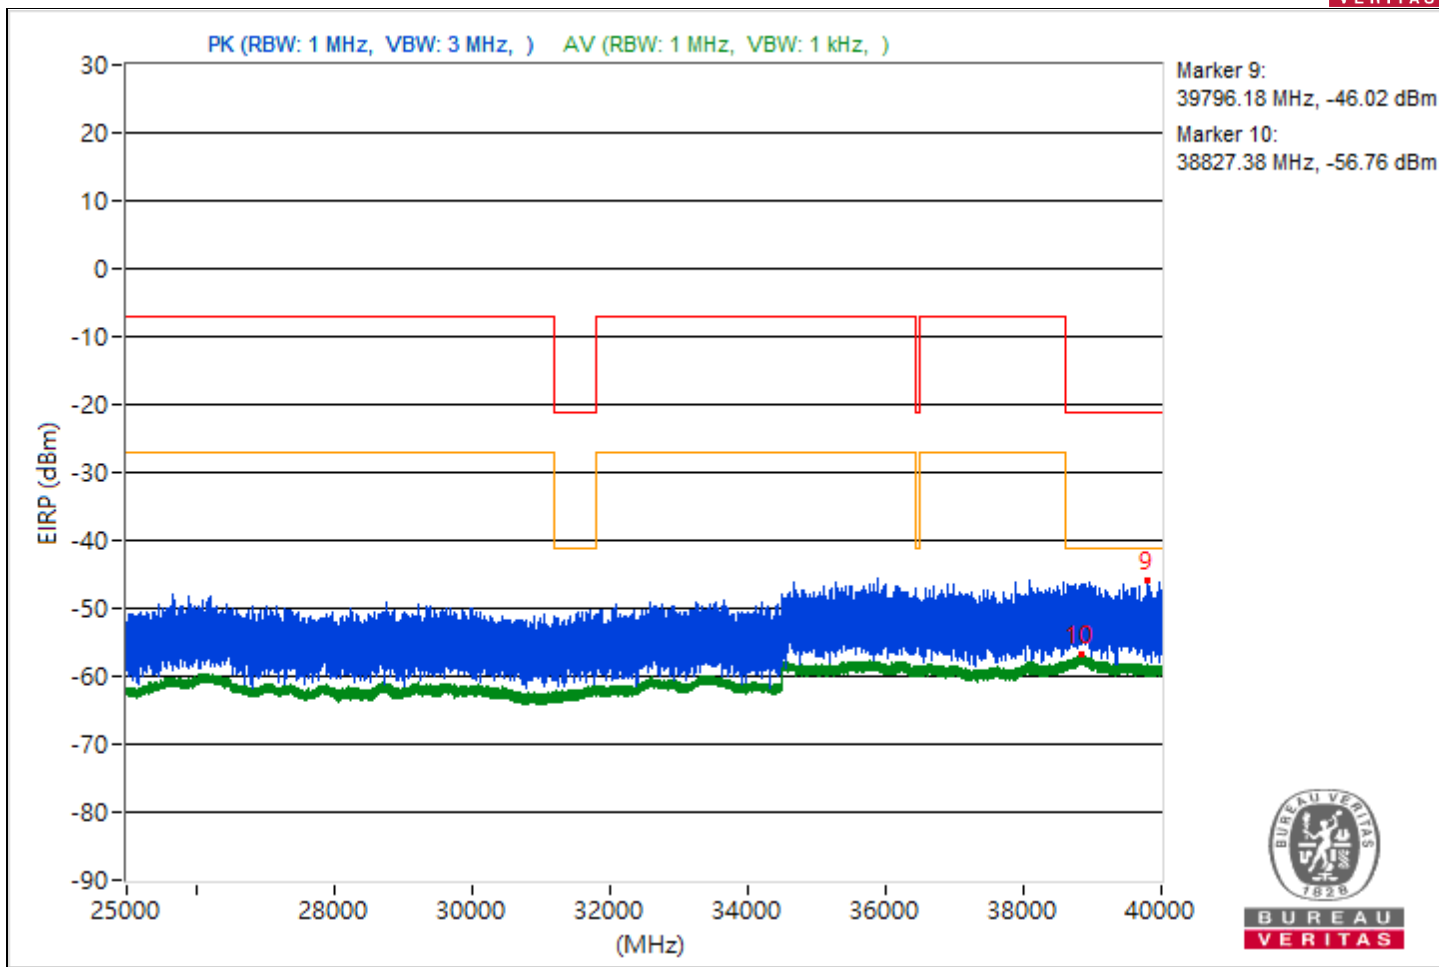





RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5555.91	53.7 PK	68.26	-14.56	-46.48	4.92	-41.56
2	3824.58	42.85 AV	54	-11.15	-57.33	4.92	-52.41
3	12353.07	53.35 PK	74	-20.65	-46.83	4.92	-41.91
4	10609.69	41.29 AV	54	-12.71	-58.89	4.92	-53.97
5	18960.5	55.31 PK	74	-18.69	-44.87	4.92	-39.95
6	19118.1	43.37 AV	54	-10.63	-56.81	4.92	-51.89
7	22378.9	57.22 PK	74	-16.78	-42.96	4.92	-38.04
8	23790.4	45.11 AV	54	-8.89	-55.07	4.92	-50.15
9	38937.78	49.76 PK	74	-24.24	-50.42	4.92	-45.5
10	38804.8	38.24 AV	54	-15.76	-61.94	4.92	-57.02

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

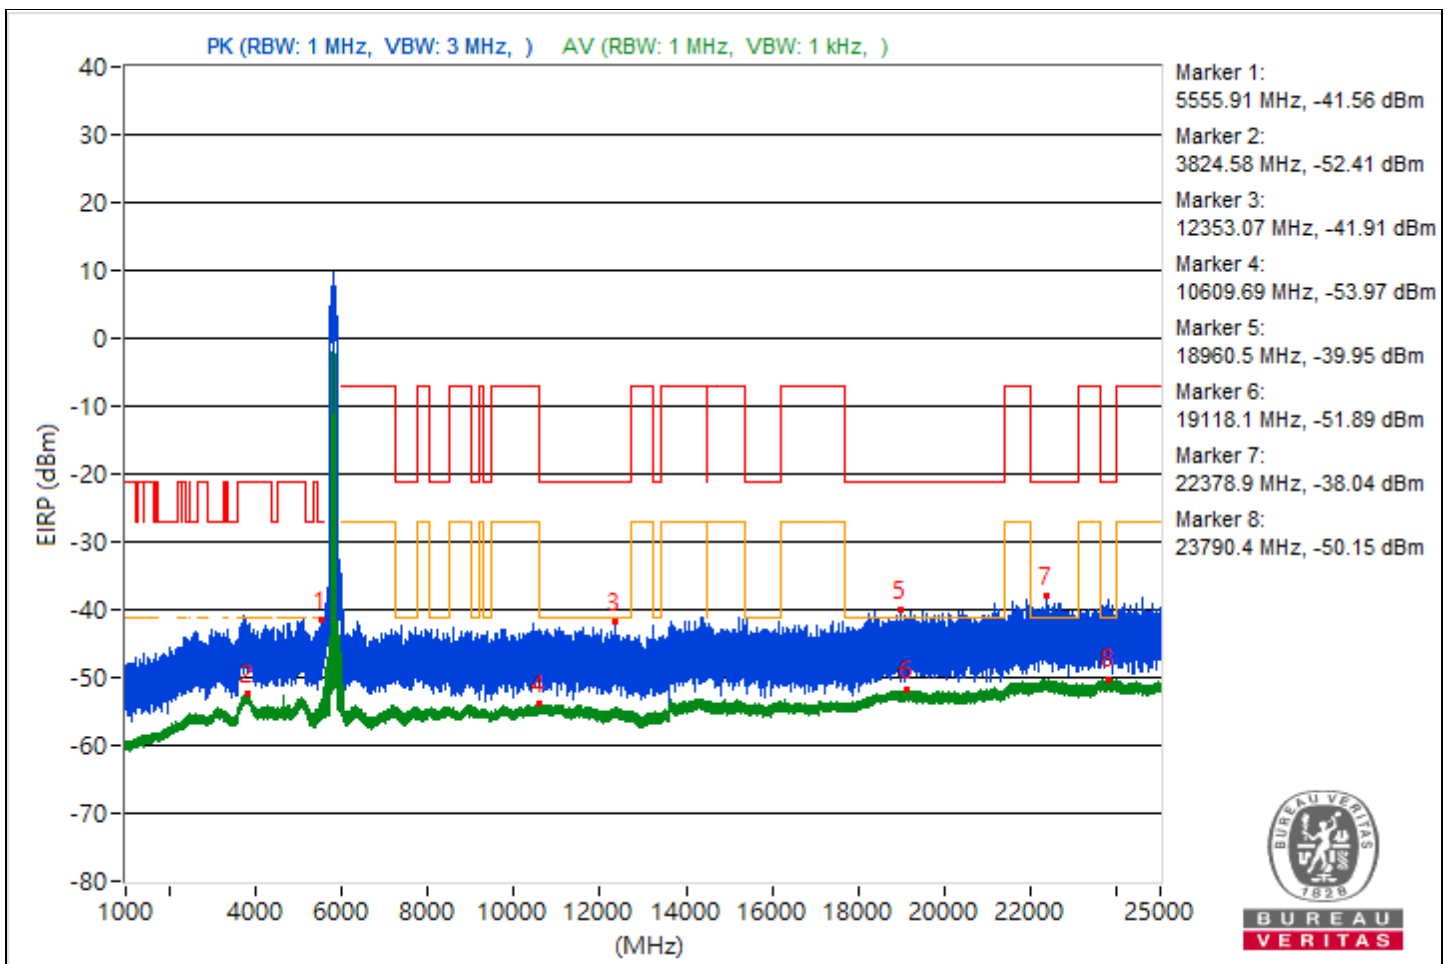

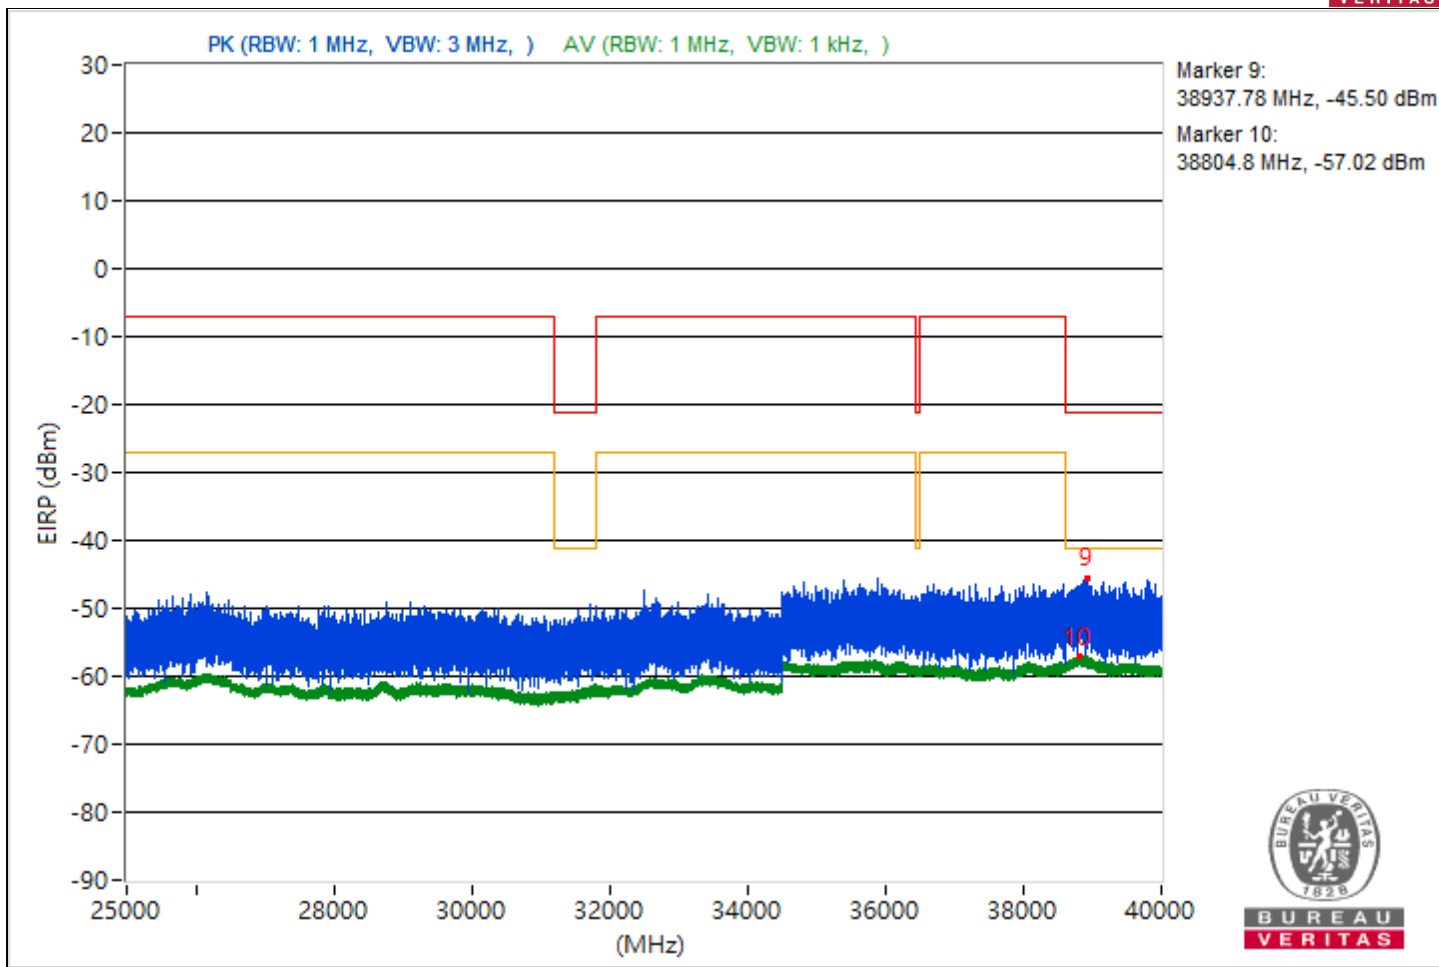





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5588.42	53.23 PK	68.26	-15.03	-46.95	4.92	-42.03
2	4675.93	42.69 AV	54	-11.31	-57.49	4.92	-52.57
3	10628.8	53.72 PK	74	-20.28	-46.46	4.92	-41.54
4	10805.96	41.03 AV	54	-12.97	-59.15	4.92	-54.23
5	19976.3	55.26 PK	74	-18.74	-44.92	4.92	-40
6	19232.4	43.2 AV	54	-10.8	-56.98	4.92	-52.06
7	22426.2	56.69 PK	74	-17.31	-43.49	4.92	-38.57
8	23617.4	44.78 AV	54	-9.22	-55.4	4.92	-50.48
9	39203.2	49.5 PK	74	-24.5	-50.68	4.92	-45.76
10	38809.33	38.21 AV	54	-15.79	-61.97	4.92	-57.05

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

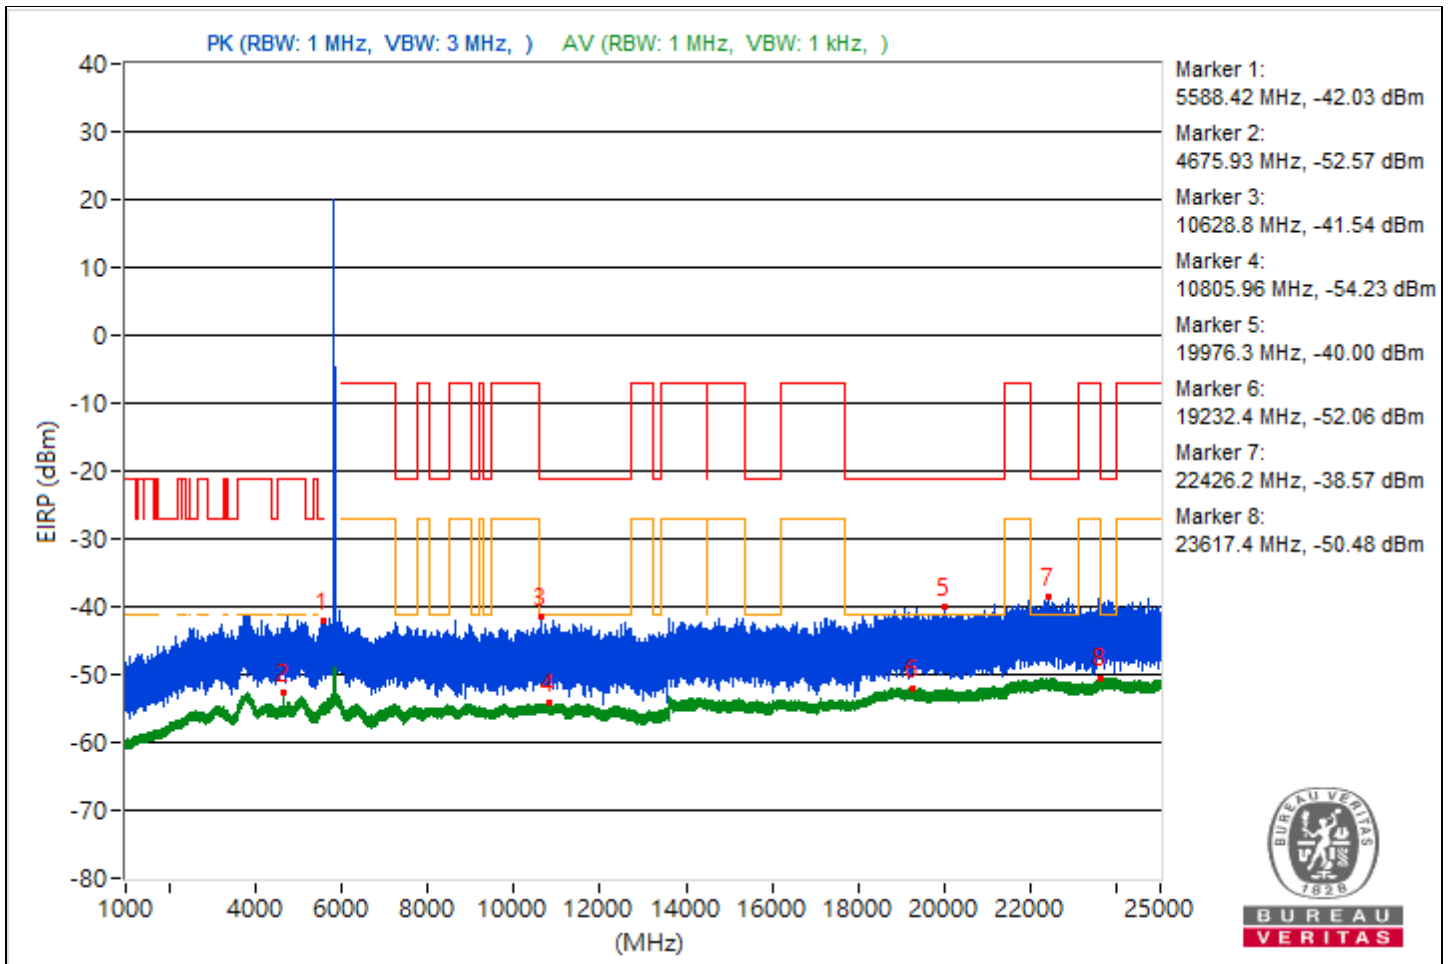

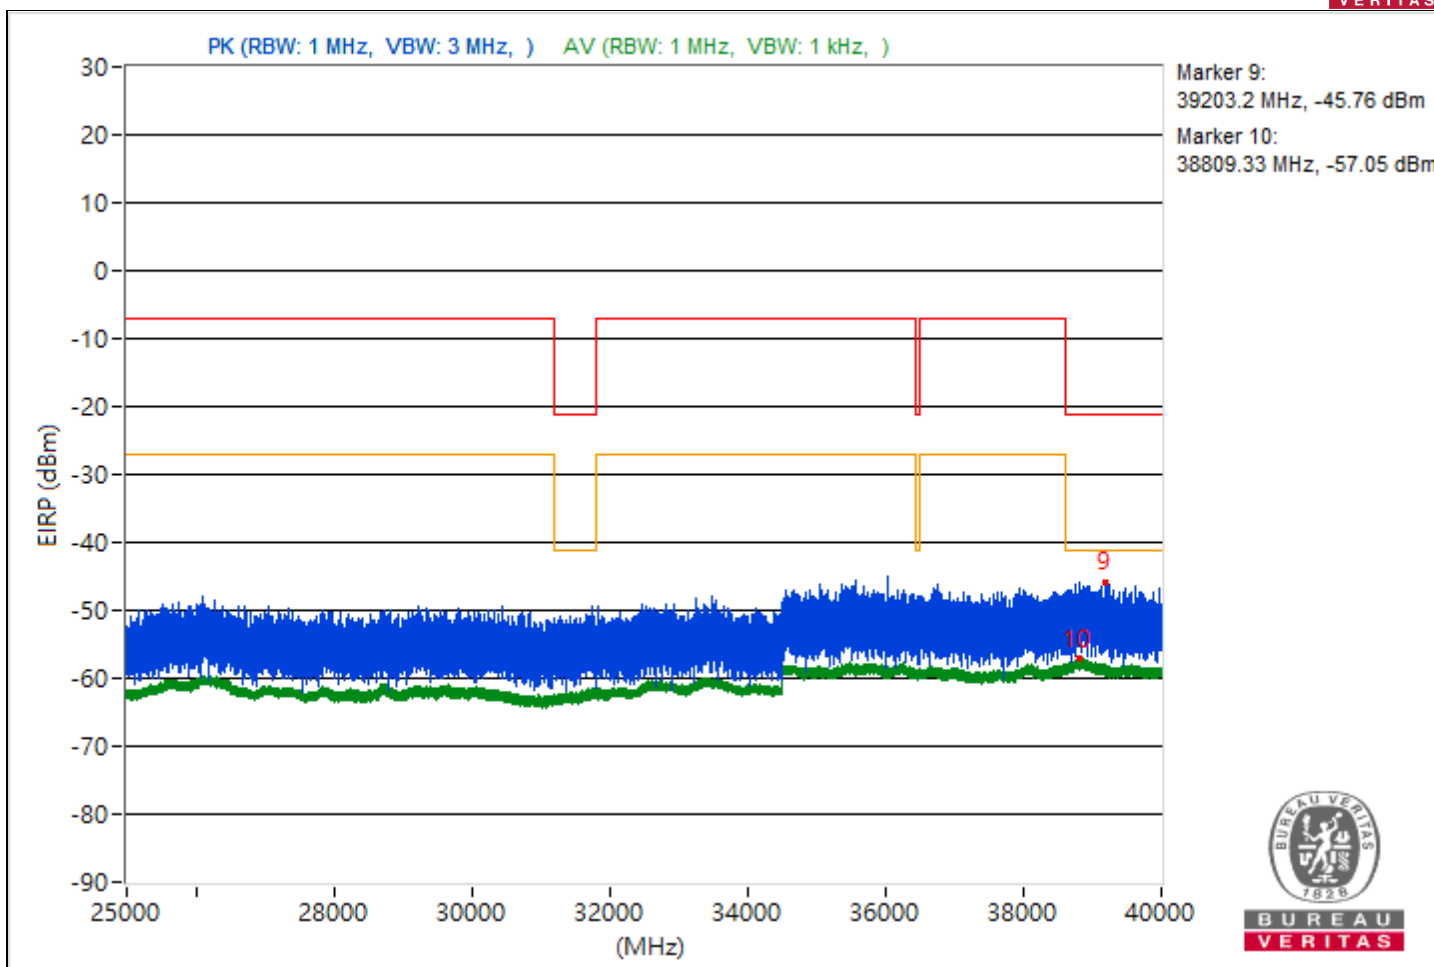





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5192.22	52.22 PK	68.26	-16.04	-47.96	4.92	-43.04
2	4691.96	42.7 AV	54	-11.3	-57.48	4.92	-52.56
3	11155.29	52.88 PK	74	-21.12	-47.3	4.92	-42.38
4	11507.38	41.09 AV	54	-12.91	-59.09	4.92	-54.17
5	19852.3	55.21 PK	74	-18.79	-44.97	4.92	-40.05
6	19406.9	43.2 AV	54	-10.8	-56.98	4.92	-52.06
7	23757.1	57.38 PK	74	-16.62	-42.8	4.92	-37.88
8	23826	44.85 AV	54	-9.15	-55.33	4.92	-50.41
9	38773.24	49.91 PK	74	-24.09	-50.27	4.92	-45.35
10	38856	38.17 AV	54	-15.83	-62.01	4.92	-57.09

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

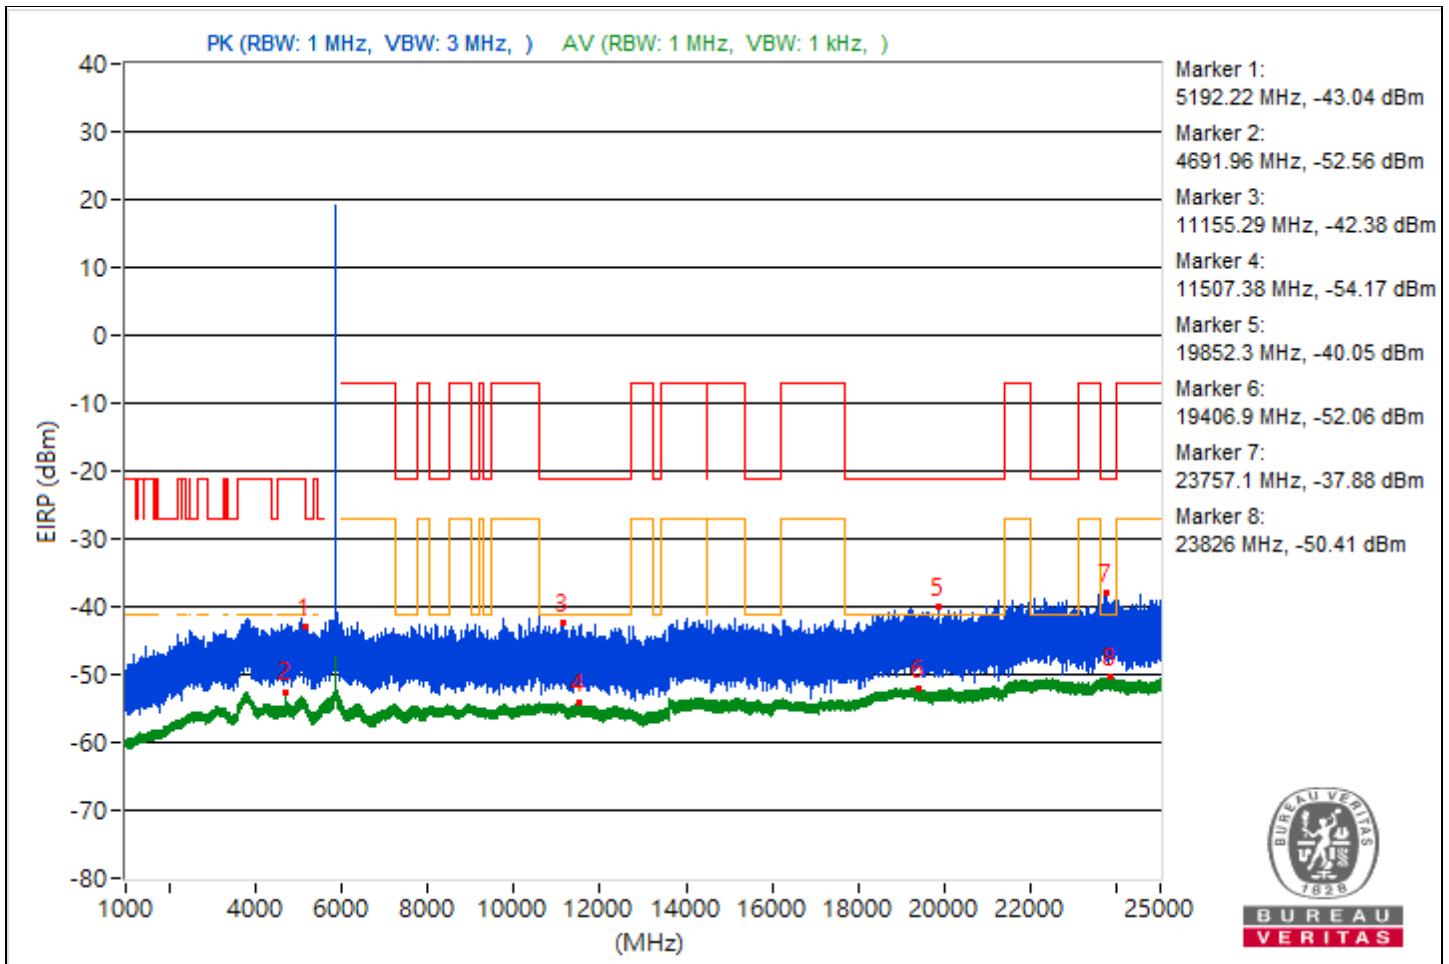

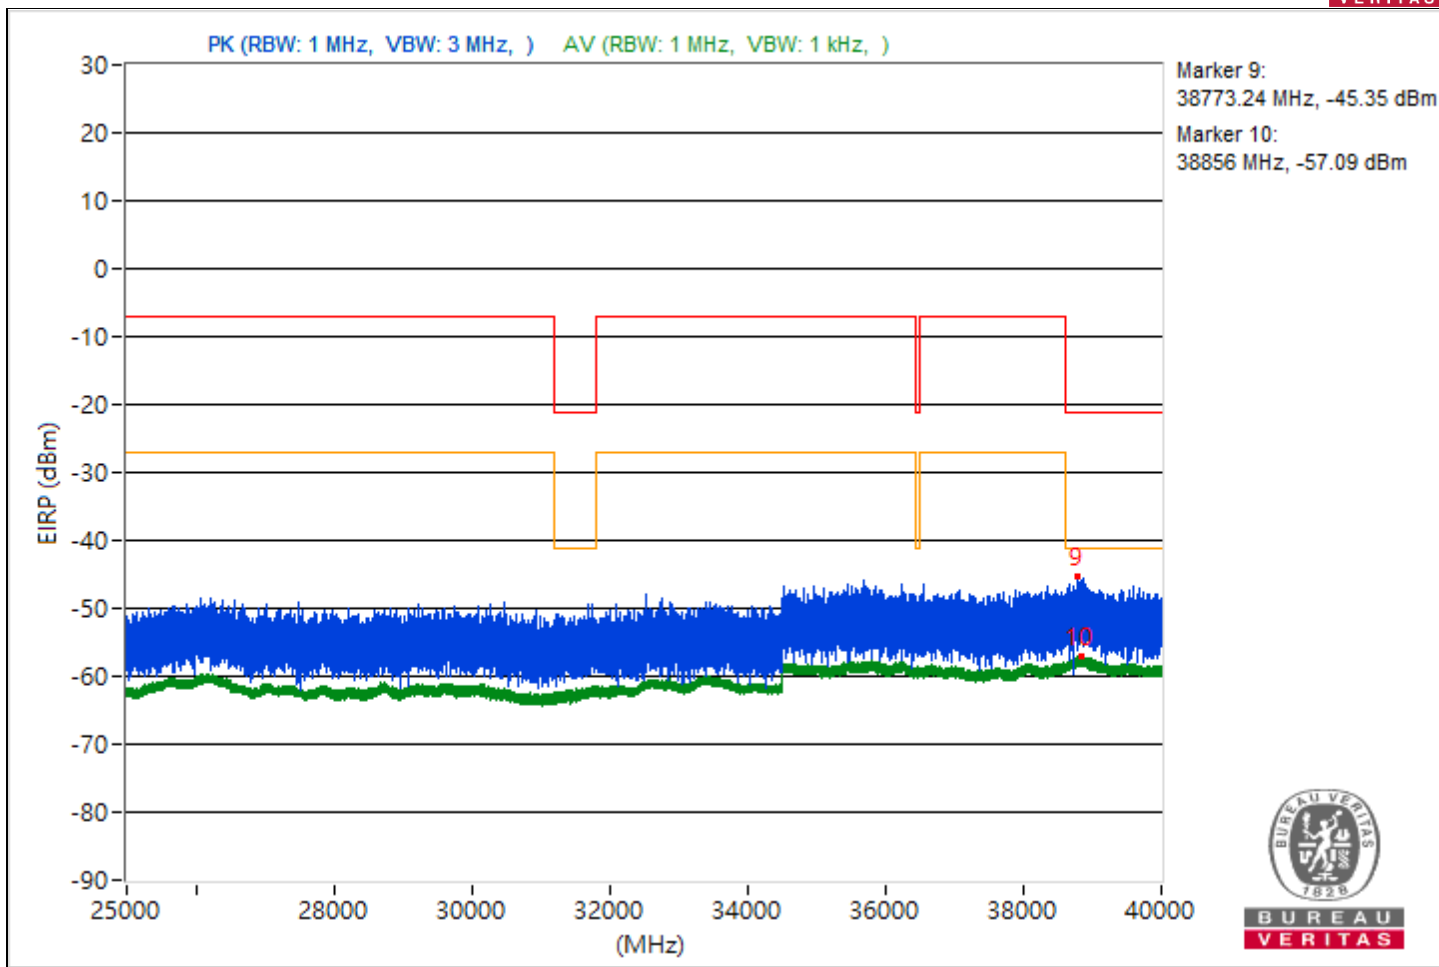





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5593.87	52.38 PK	68.26	-15.88	-47.8	4.92	-42.88
2	3814.39	42.56 AV	54	-11.44	-57.62	4.92	-52.7
3	7447.39	52.91 PK	74	-21.09	-47.27	4.92	-42.35
4	11448.44	40.99 AV	54	-13.01	-59.19	4.92	-54.27
5	19144.4	55.47 PK	74	-18.53	-44.71	4.92	-39.79
6	18832.7	43.48 AV	54	-10.52	-56.7	4.92	-51.78
7	22109.5	56.8 PK	74	-17.2	-43.38	4.92	-38.46
8	22342	44.89 AV	54	-9.11	-55.29	4.92	-50.37
9	38950.22	49.82 PK	74	-24.18	-50.36	4.92	-45.44
10	38814.49	38.4 AV	54	-15.6	-61.78	4.92	-56.86

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

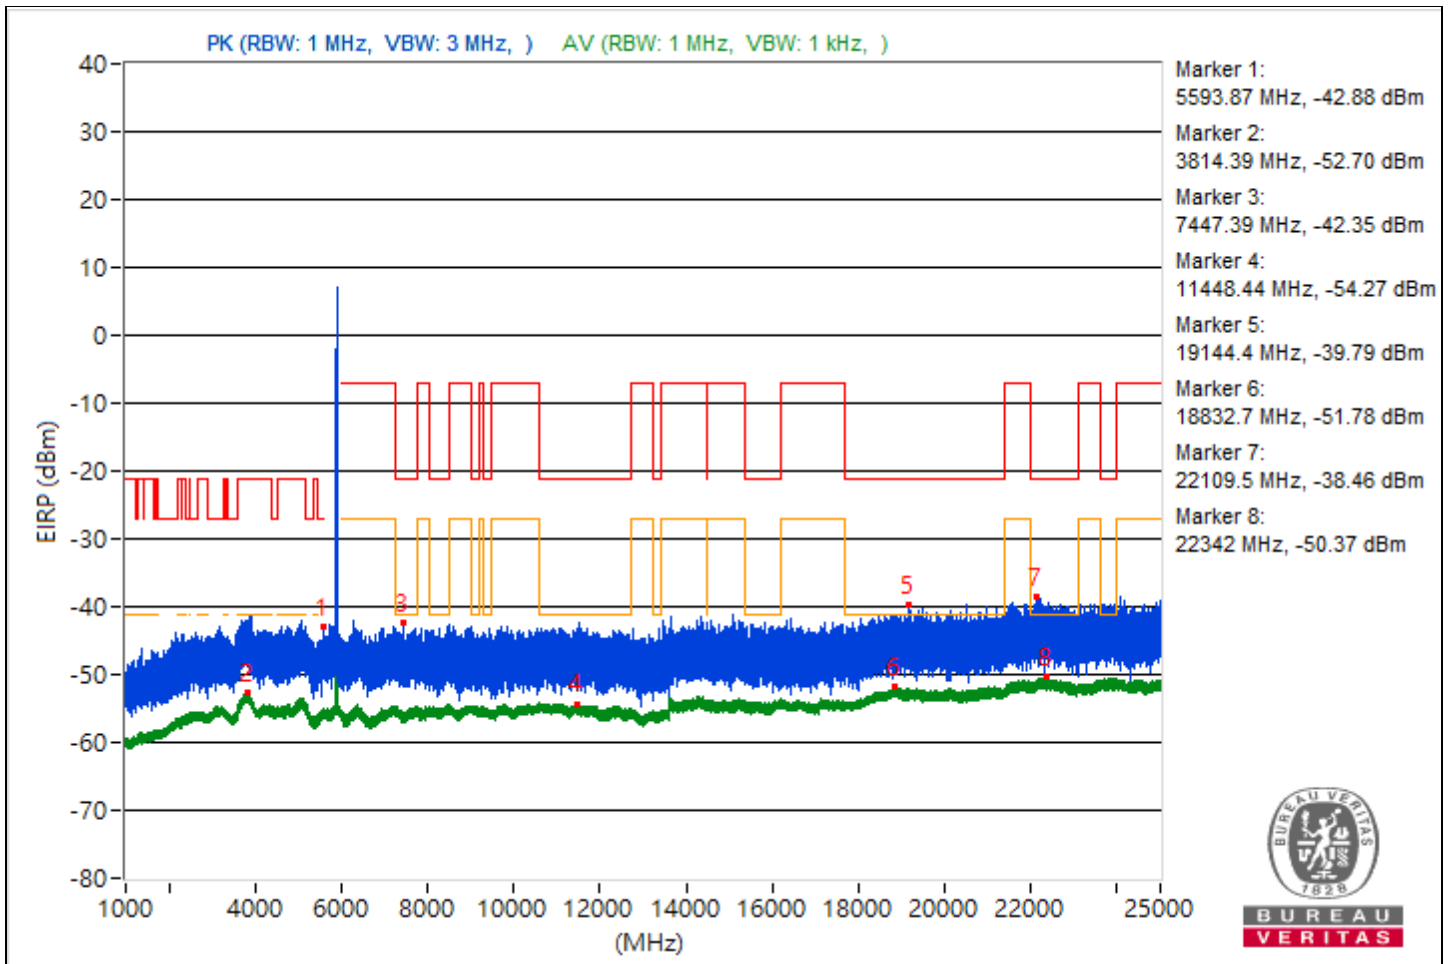

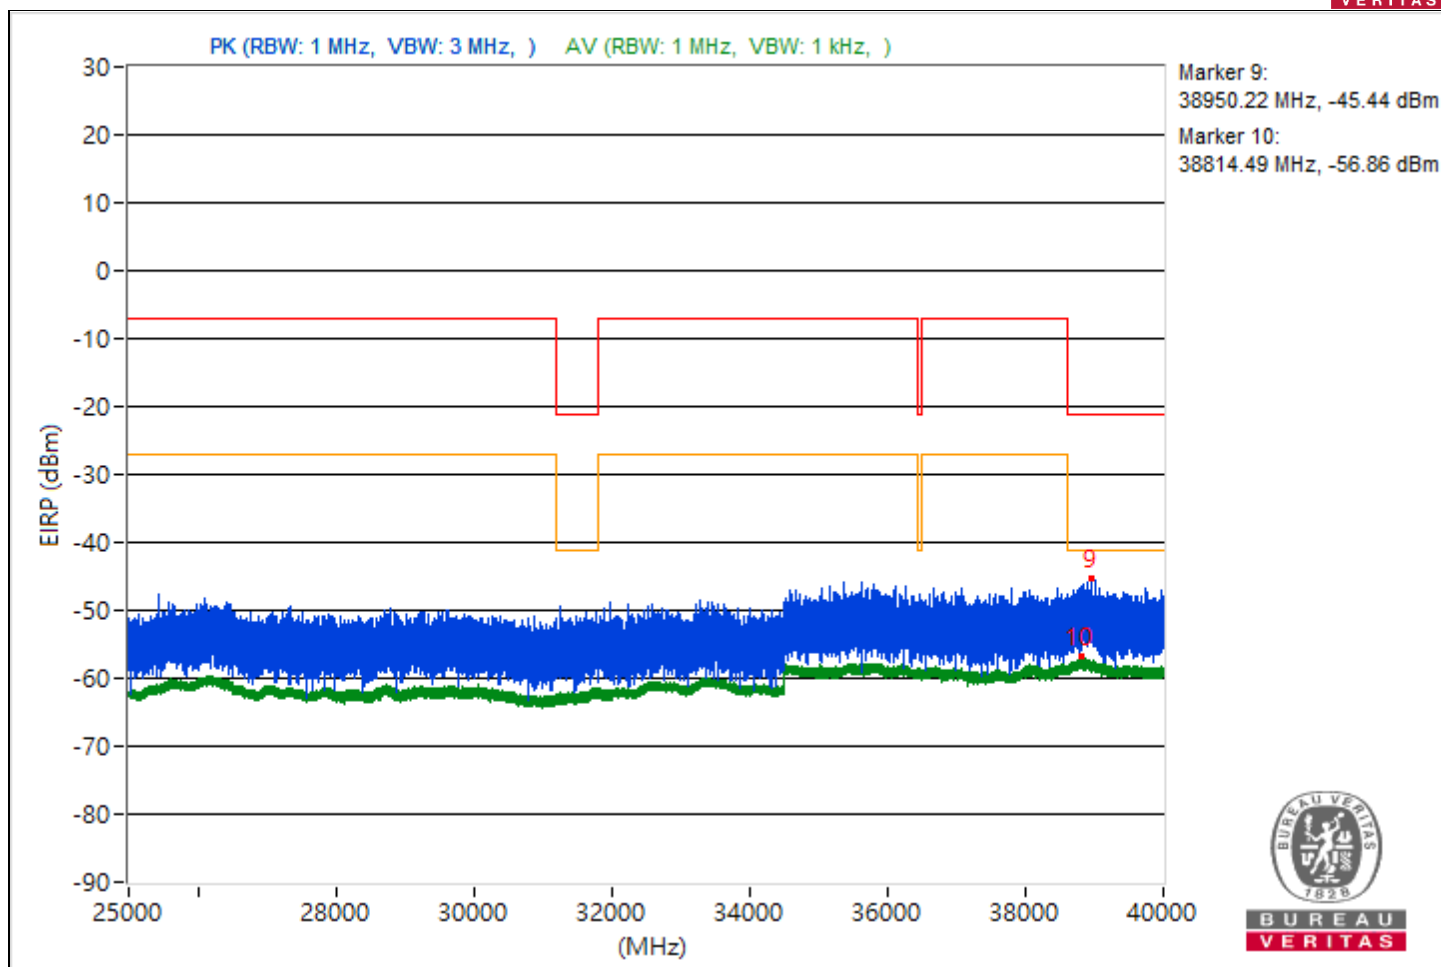





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3132.98	52.94 PK	68.26	-15.32	-47.24	4.92	-42.32
2	3818.82	42.49 AV	54	-11.51	-57.69	4.92	-52.77
3	11118.93	53.47 PK	74	-20.53	-46.71	4.92	-41.79
4	10688	41.04 AV	54	-12.96	-59.14	4.92	-54.22
5	19229.7	55.73 PK	74	-18.27	-44.45	4.92	-39.53
6	18827.3	43.14 AV	54	-10.86	-57.04	4.92	-52.12
7	23929.8	56.92 PK	74	-17.08	-43.26	4.92	-38.34
8	22251	44.89 AV	54	-9.11	-55.29	4.92	-50.37
9	38702.31	49.66 PK	74	-24.34	-50.52	4.92	-45.6
10	38783.47	38.24 AV	54	-15.76	-61.94	4.92	-57.02

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

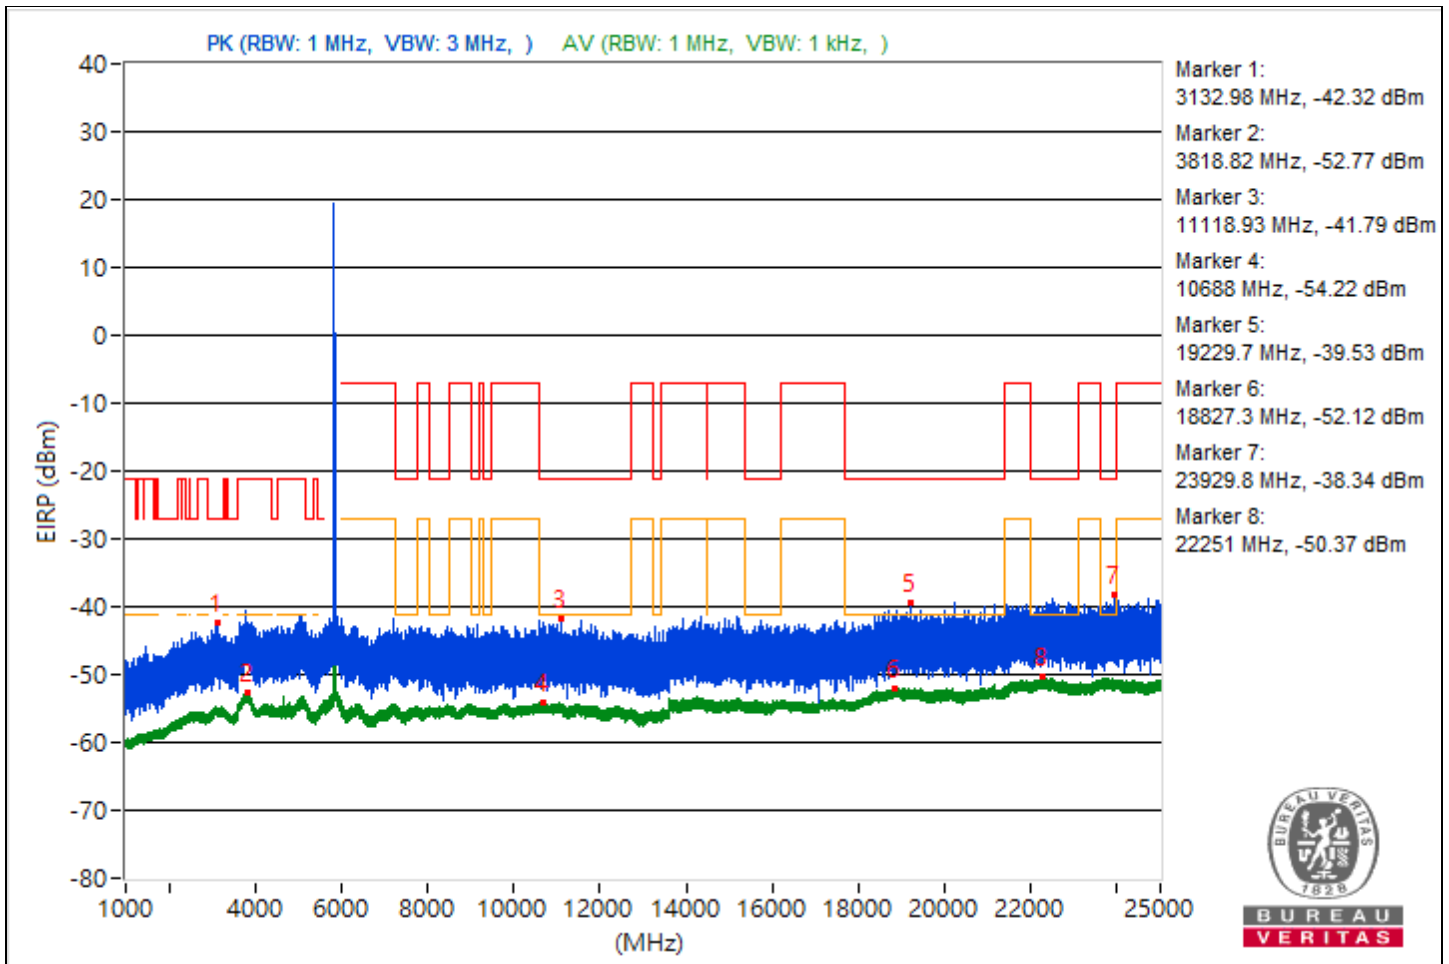

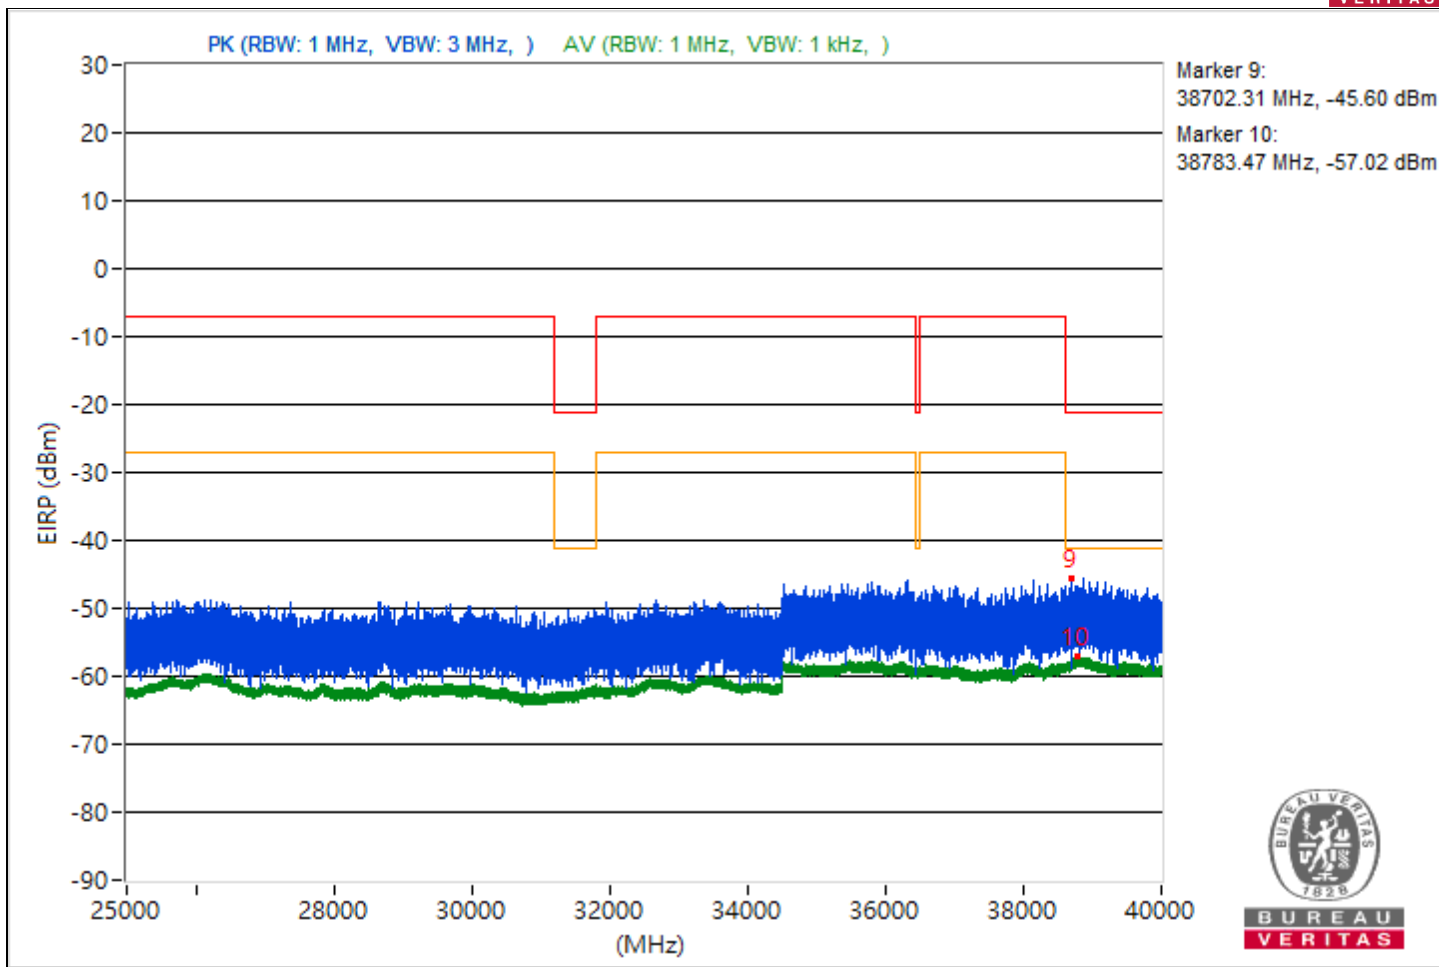





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5156.83	53.69 PK	68.26	-14.57	-46.49	4.92	-41.57
2	3802.88	42.51 AV	54	-11.49	-57.67	4.92	-52.75
3	11481.51	52.99 PK	74	-21.01	-47.19	4.92	-42.27
4	10660.27	41.14 AV	54	-12.86	-59.04	4.92	-54.12
5	19758.9	55.35 PK	74	-18.65	-44.83	4.92	-39.91
6	18887.1	43.23 AV	54	-10.77	-56.95	4.92	-52.03
7	22223.7	56.11 PK	74	-17.89	-44.07	4.92	-39.15
8	22236.7	44.73 AV	54	-9.27	-55.45	4.92	-50.53
9	39241.33	49.46 PK	74	-24.54	-50.72	4.92	-45.8
10	38838.4	38.25 AV	54	-15.75	-61.93	4.92	-57.01

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

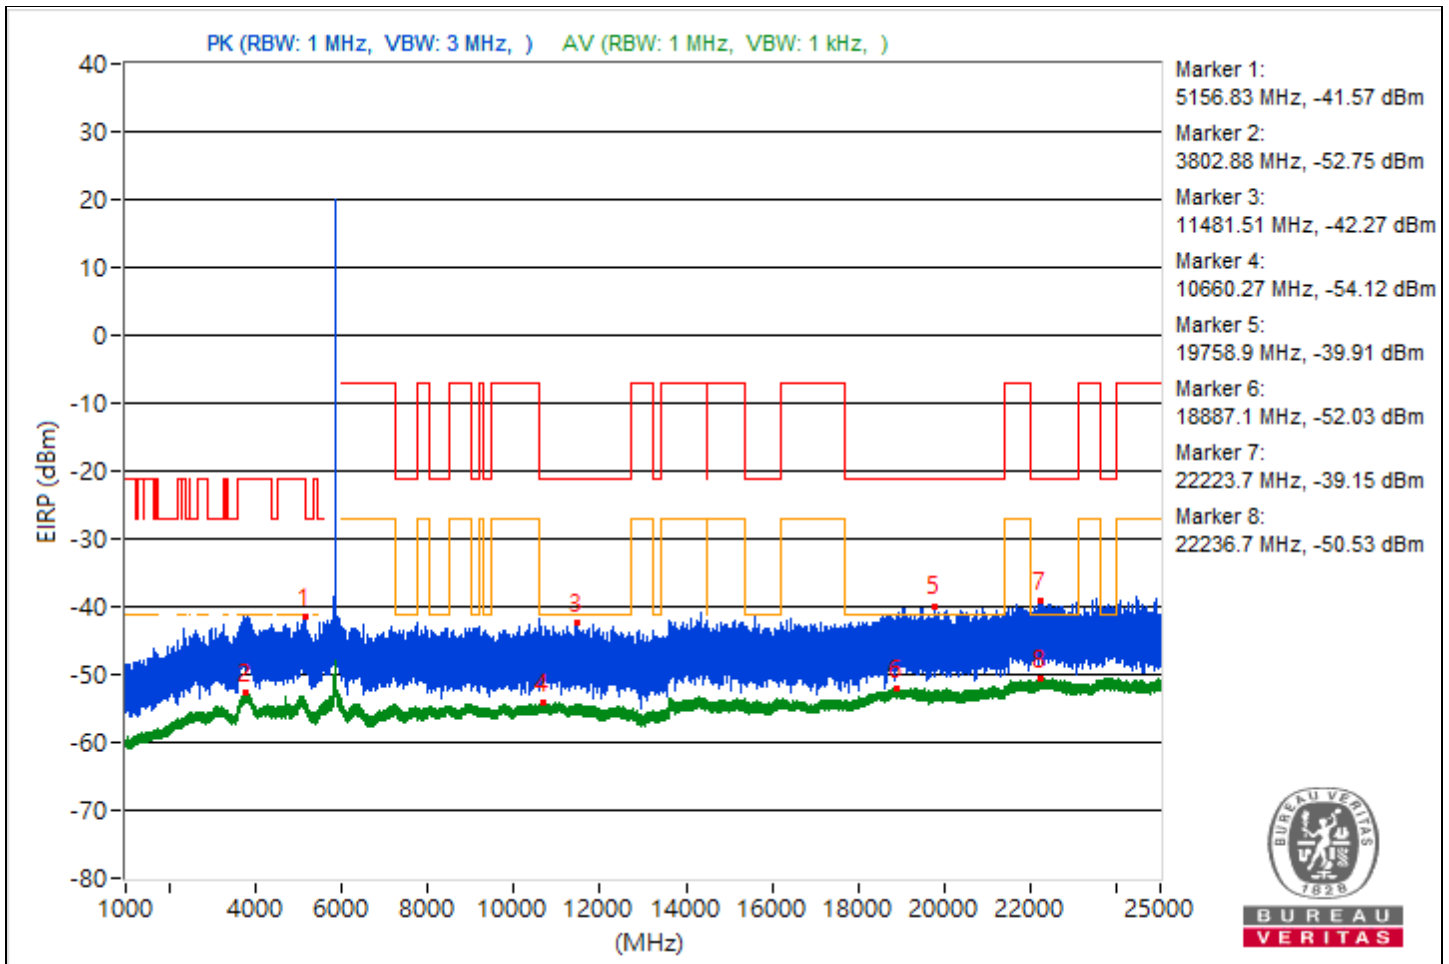

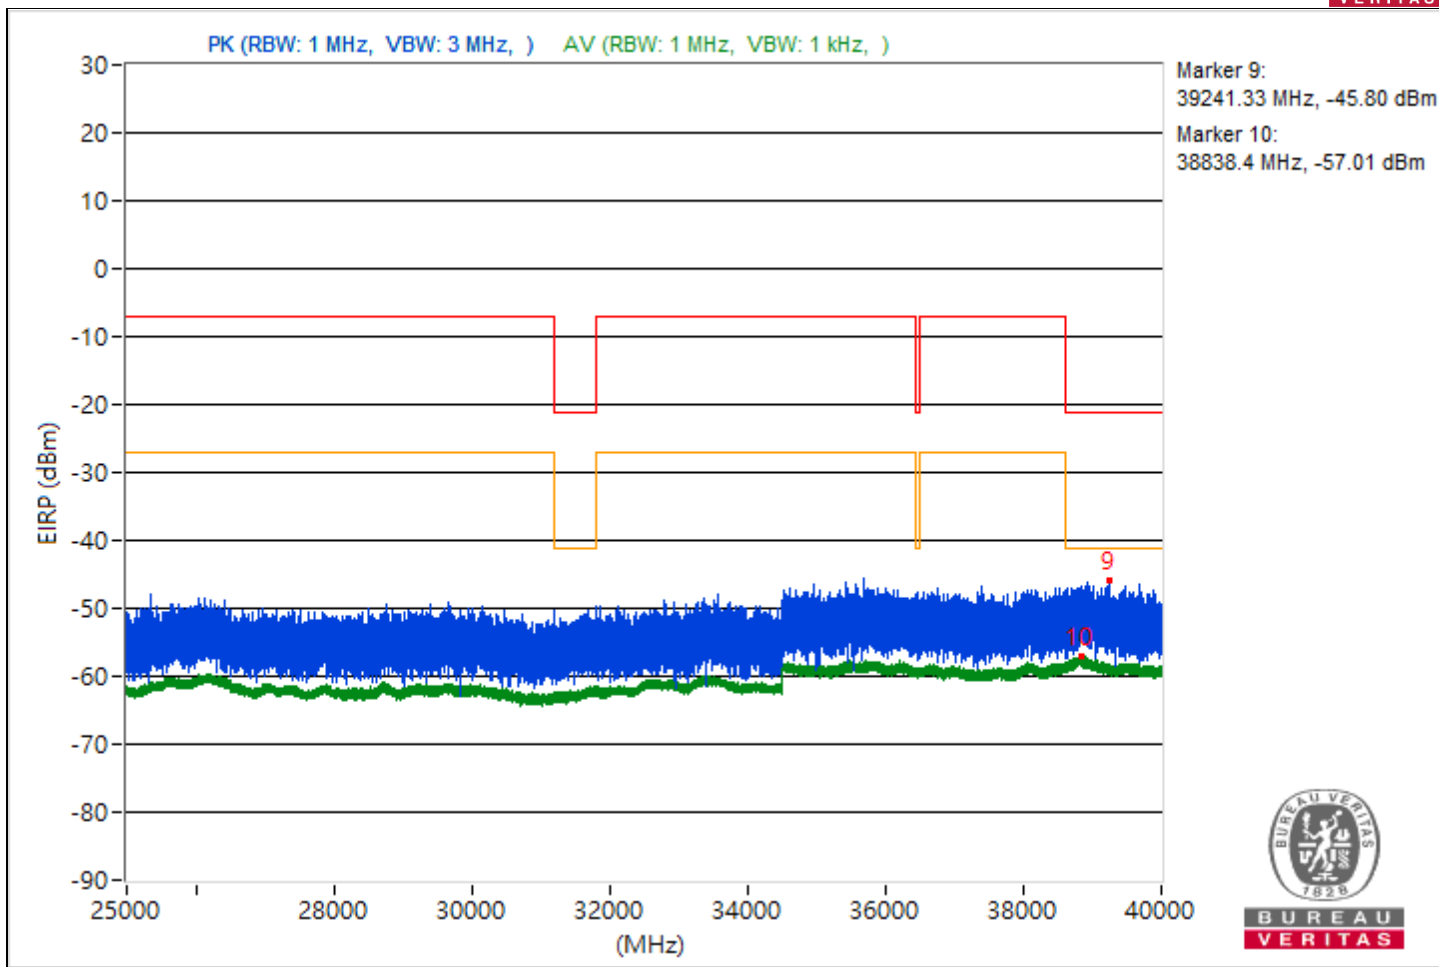





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5169.9	52.2 PK	68.26	-16.06	-47.98	4.92	-43.06
2	3811.59	42.54 AV	54	-11.46	-57.64	4.92	-52.72
3	11821.78	52.92 PK	74	-21.08	-47.26	4.92	-42.34
4	11090.76	41.19 AV	54	-12.81	-58.99	4.92	-54.07
5	19020	55.51 PK	74	-18.49	-44.67	4.92	-39.75
6	18840.9	43.42 AV	54	-10.58	-56.76	4.92	-51.84
7	22266.1	56.99 PK	74	-17.01	-43.19	4.92	-38.27
8	23635.9	44.81 AV	54	-9.19	-55.37	4.92	-50.45
9	39623.38	50.14 PK	74	-23.86	-50.04	4.92	-45.12
10	38820.89	38.37 AV	54	-15.63	-61.81	4.92	-56.89

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

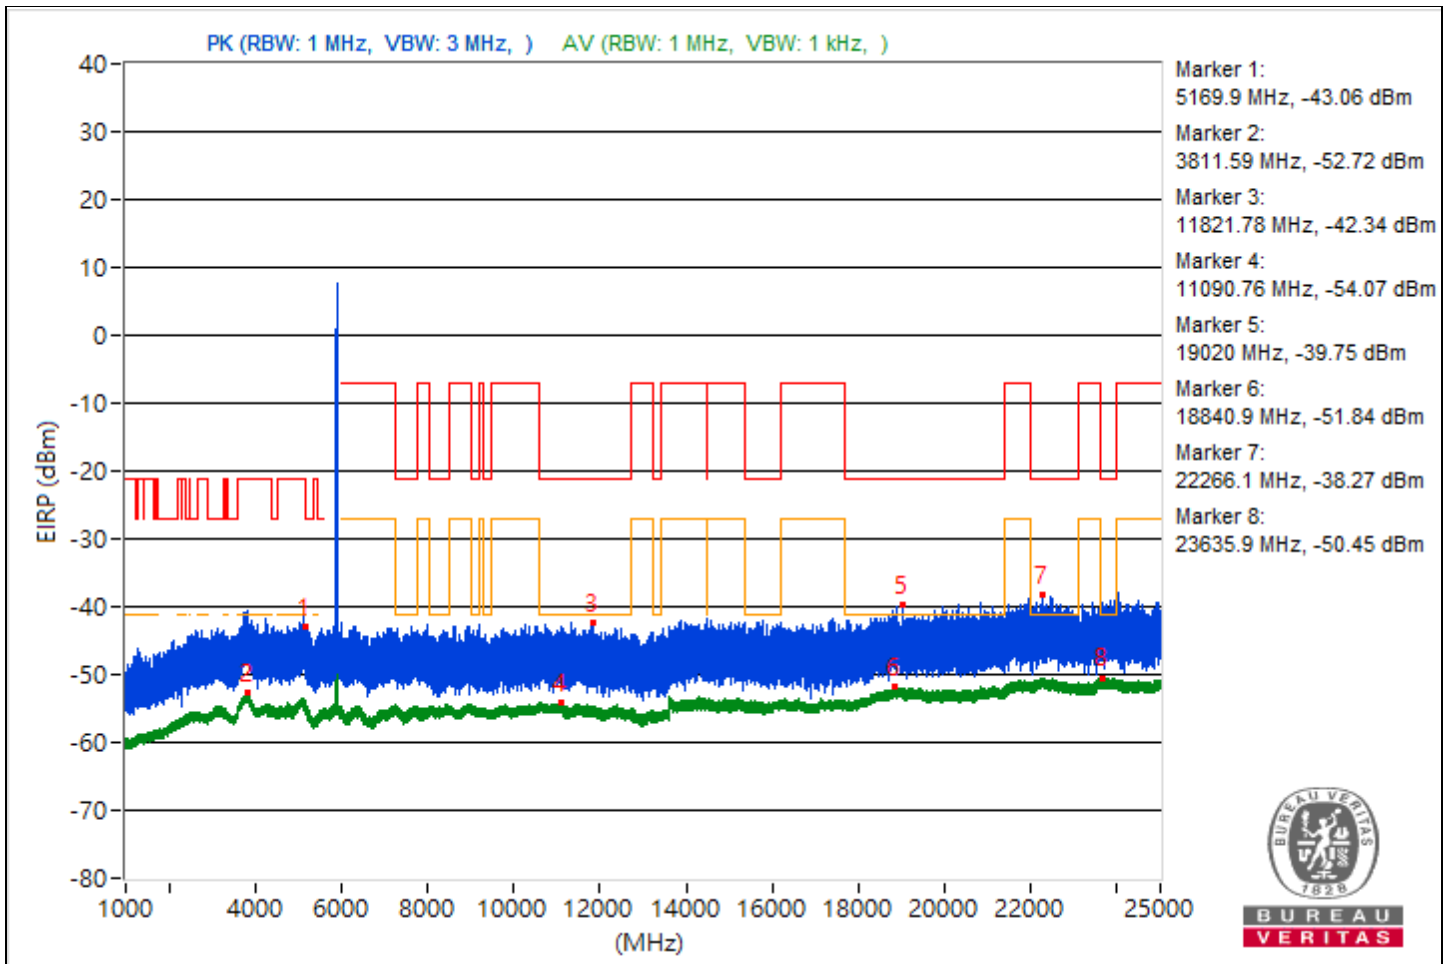

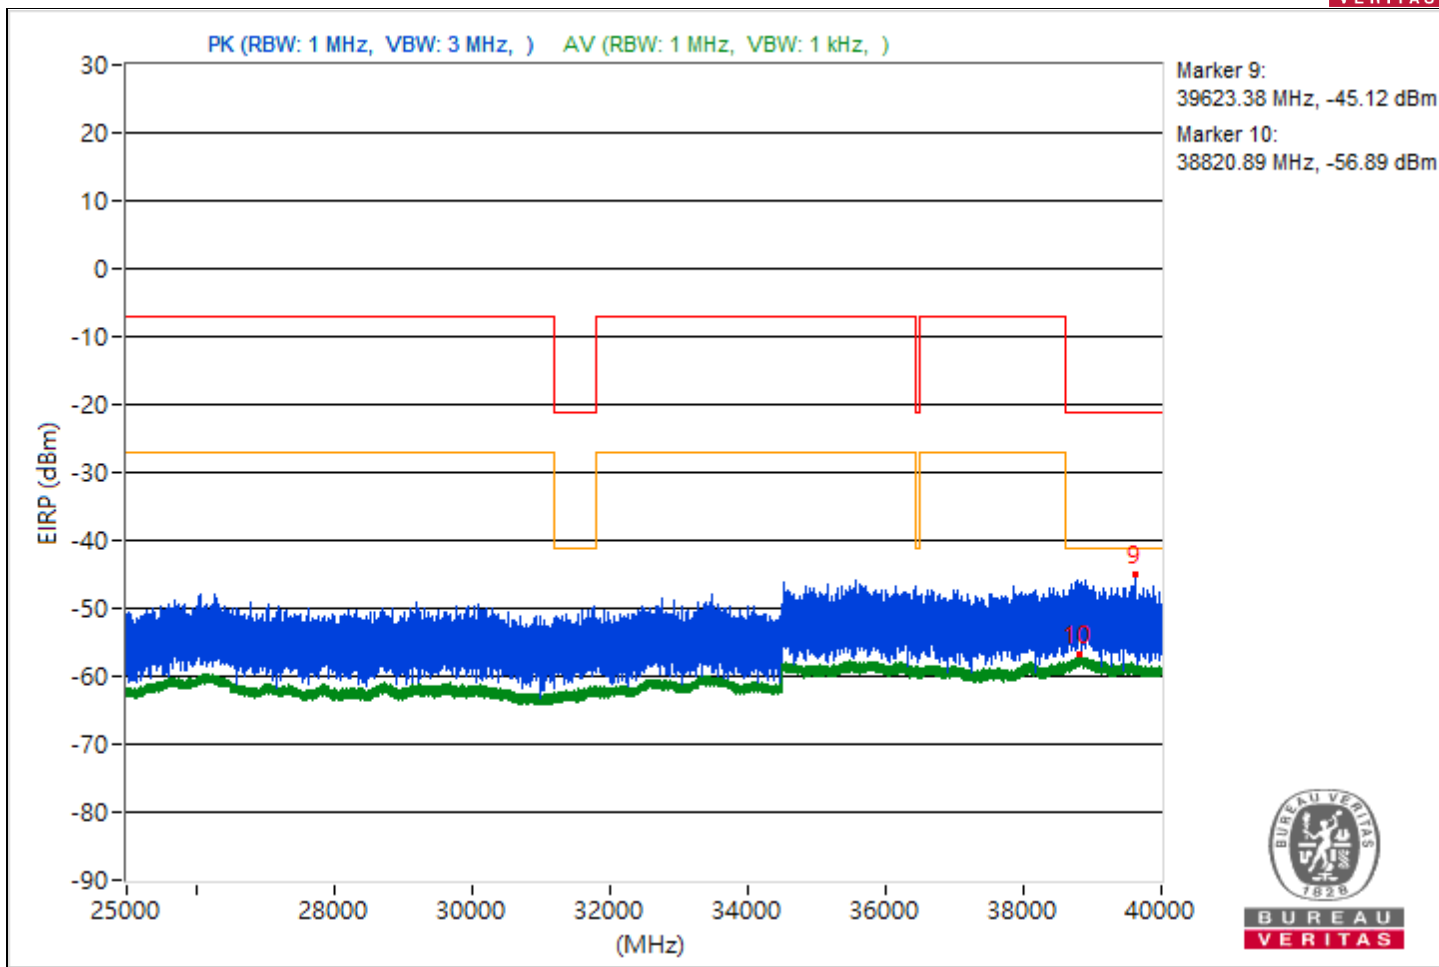



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5197.28	52.84 PK	68.26	-15.42	-47.34	4.92	-42.42
2	3816.18	42.48 AV	54	-11.52	-57.7	4.92	-52.78
3	12337.78	53.08 PK	74	-20.92	-47.1	4.92	-42.18
4	11099.47	41.05 AV	54	-12.95	-59.13	4.92	-54.21
5	19149.9	54.98 PK	74	-19.02	-45.2	4.92	-40.28
6	19170.2	43.22 AV	54	-10.78	-56.96	4.92	-52.04
7	22238.2	56.64 PK	74	-17.36	-43.54	4.92	-38.62
8	23634.8	44.71 AV	54	-9.29	-55.47	4.92	-50.55
9	38843.73	50.85 PK	74	-23.15	-49.33	4.92	-44.41
10	38867.2	38.23 AV	54	-15.77	-61.95	4.92	-57.03

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

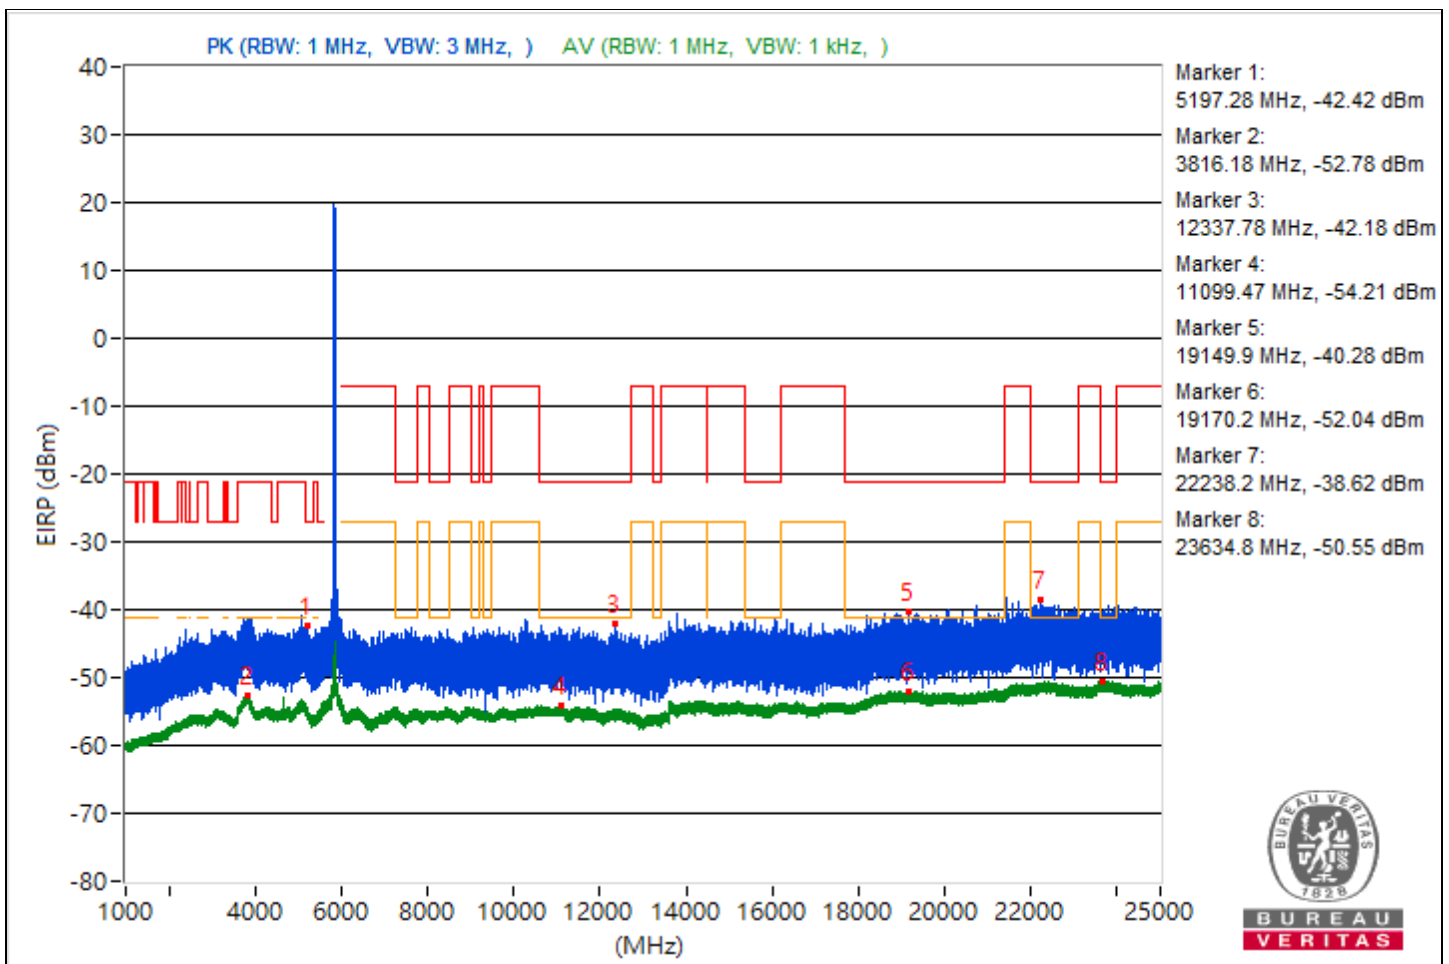

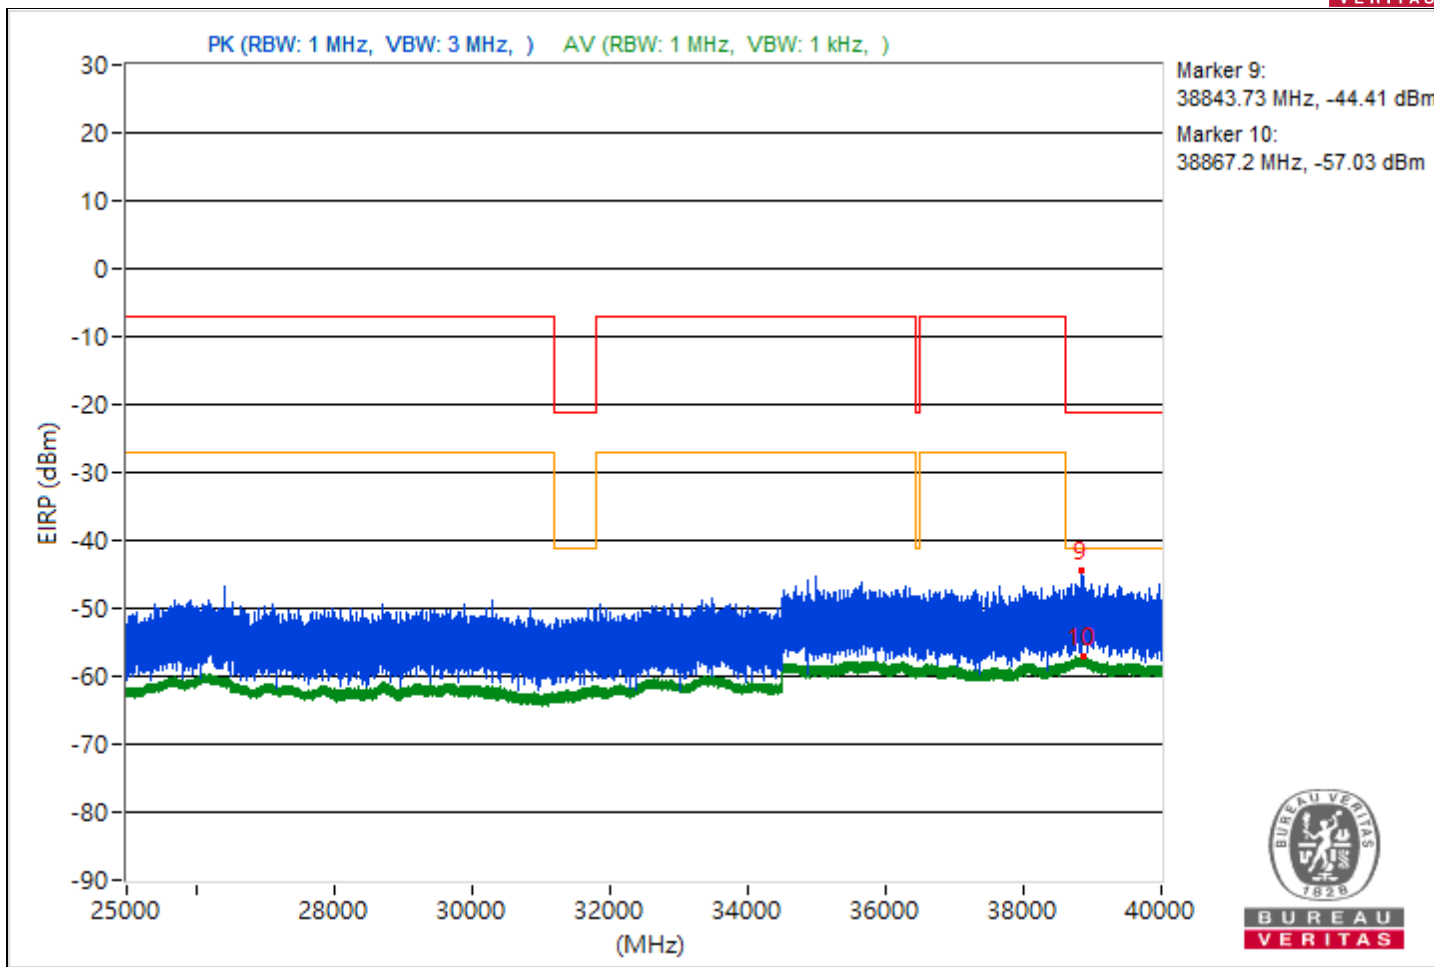





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5177.37	52.78 PK	68.26	-15.48	-47.4	4.92	-42.48
2	3815.79	42.56 AV	54	-11.44	-57.62	4.92	-52.7
3	11405.16	53.9 PK	74	-20.1	-46.28	4.92	-41.36
4	10617.6	41.12 AV	54	-12.88	-59.06	4.92	-54.14
5	19234	55.43 PK	74	-18.57	-44.75	4.92	-39.83
6	19211.4	43.36 AV	54	-10.64	-56.82	4.92	-51.9
7	22350.1	56.74 PK	74	-17.26	-43.44	4.92	-38.52
8	23866.6	44.77 AV	54	-9.23	-55.41	4.92	-50.49
9	38951.2	50.79 PK	74	-23.21	-49.39	4.92	-44.47
10	38847.02	38.3 AV	54	-15.7	-61.88	4.92	-56.96

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

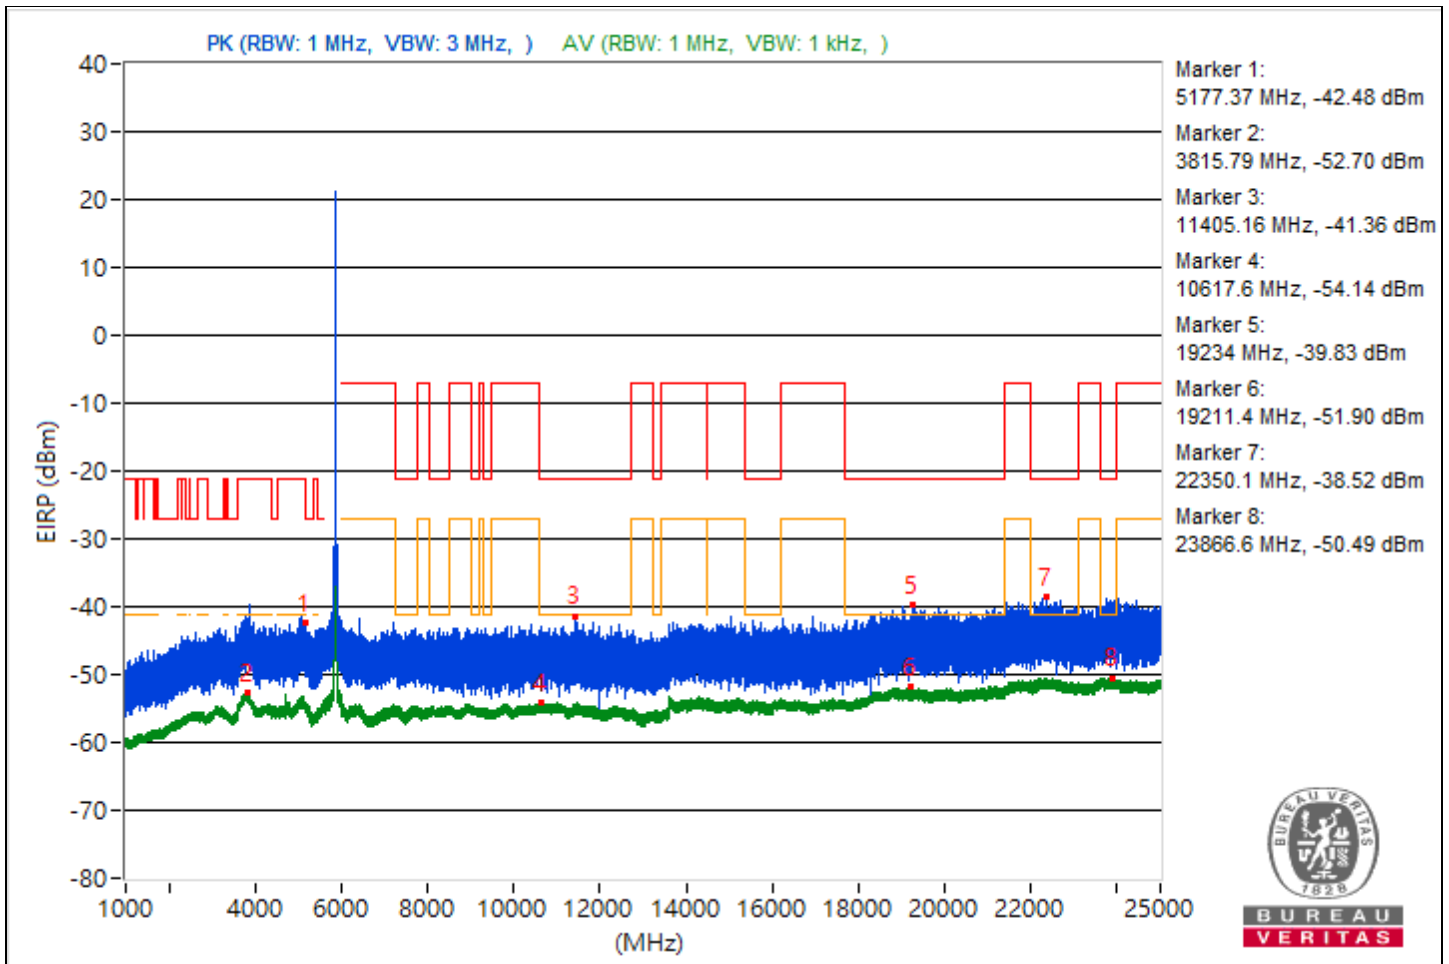

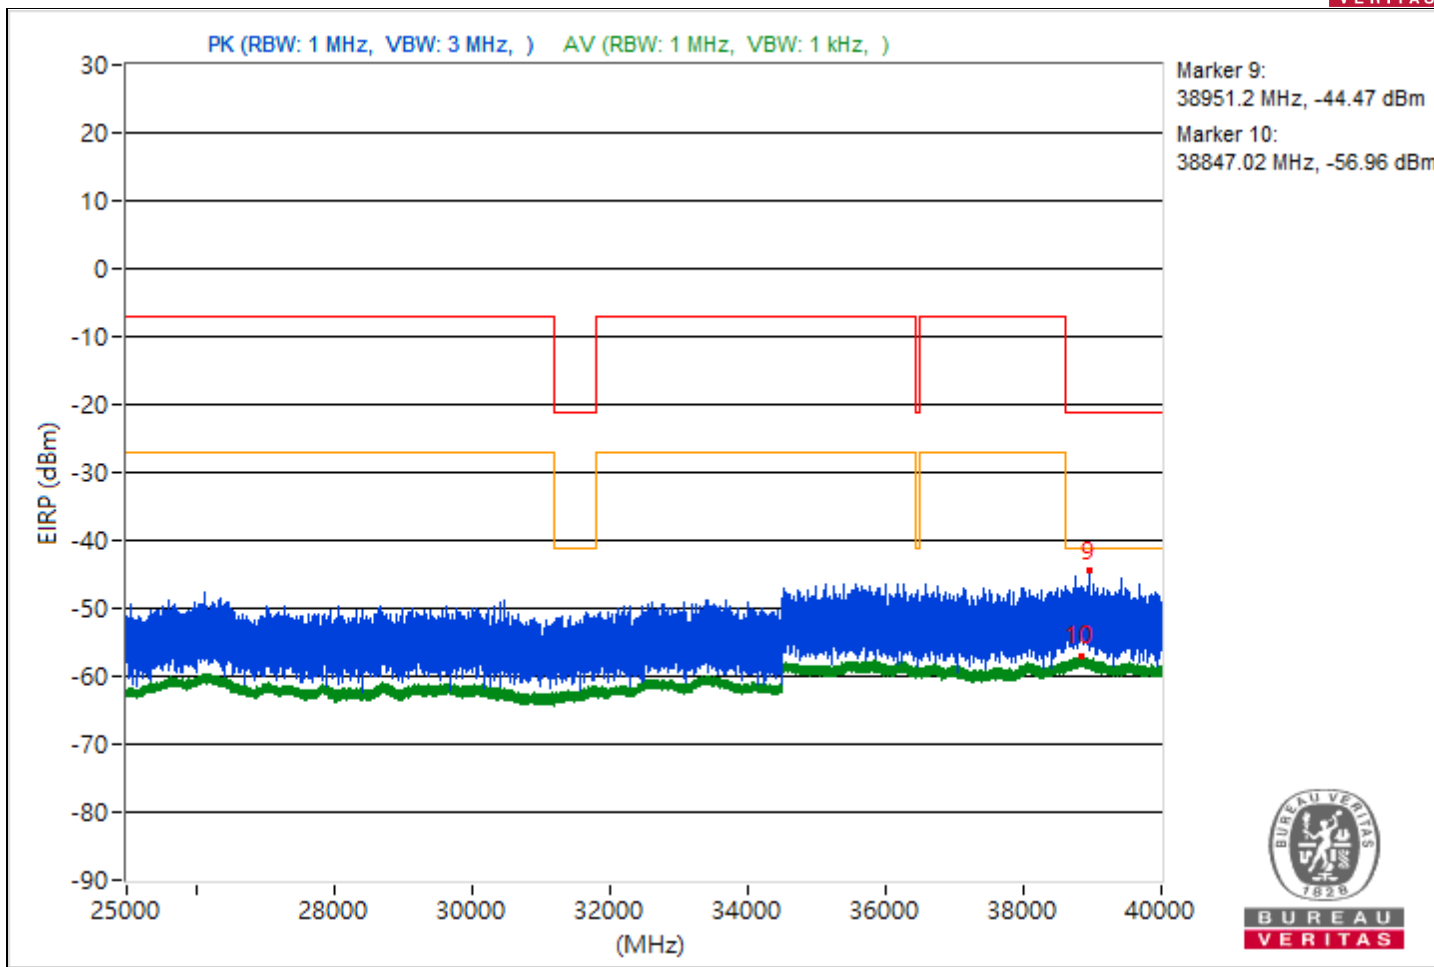





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5167.96	53.41 PK	68.26	-14.85	-46.77	4.92	-41.85
2	3790.04	42.55 AV	54	-11.45	-57.63	4.92	-52.71
3	10843.38	52.82 PK	74	-21.18	-47.36	4.92	-42.44
4	10612.27	41.07 AV	54	-12.93	-59.11	4.92	-54.19
5	19339	54.67 PK	74	-19.33	-45.51	4.92	-40.59
6	18896.6	43.24 AV	54	-10.76	-56.94	4.92	-52.02
7	23983.1	57.86 PK	74	-16.14	-42.32	4.92	-37.4
8	23884.1	44.79 AV	54	-9.21	-55.39	4.92	-50.47
9	39042.67	49.75 PK	74	-24.25	-50.43	4.92	-45.51
10	38833.87	38.24 AV	54	-15.76	-61.94	4.92	-57.02

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

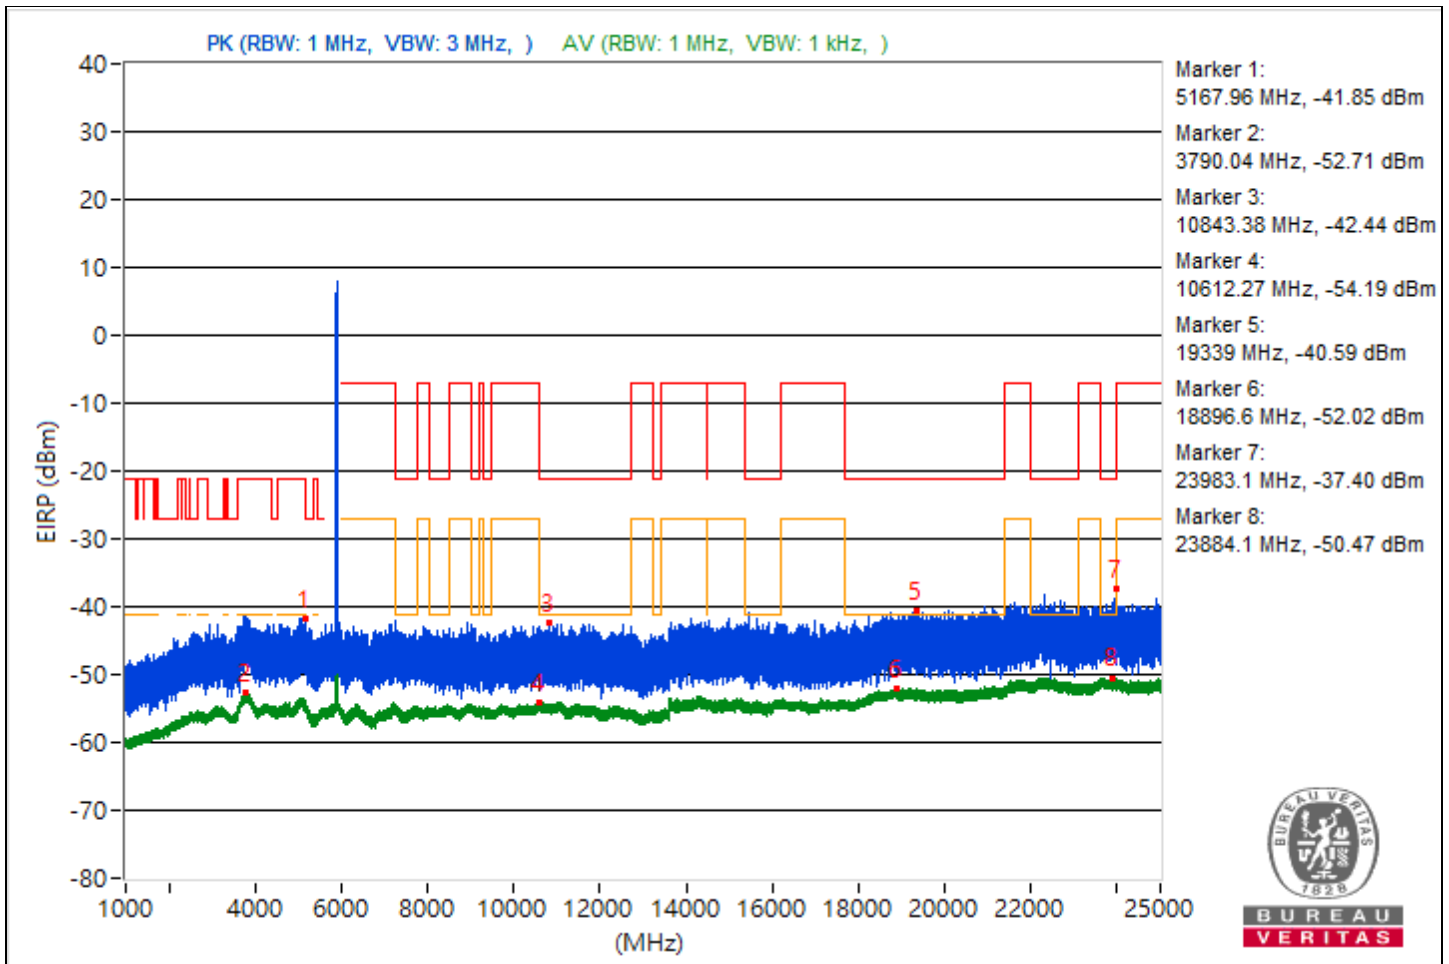

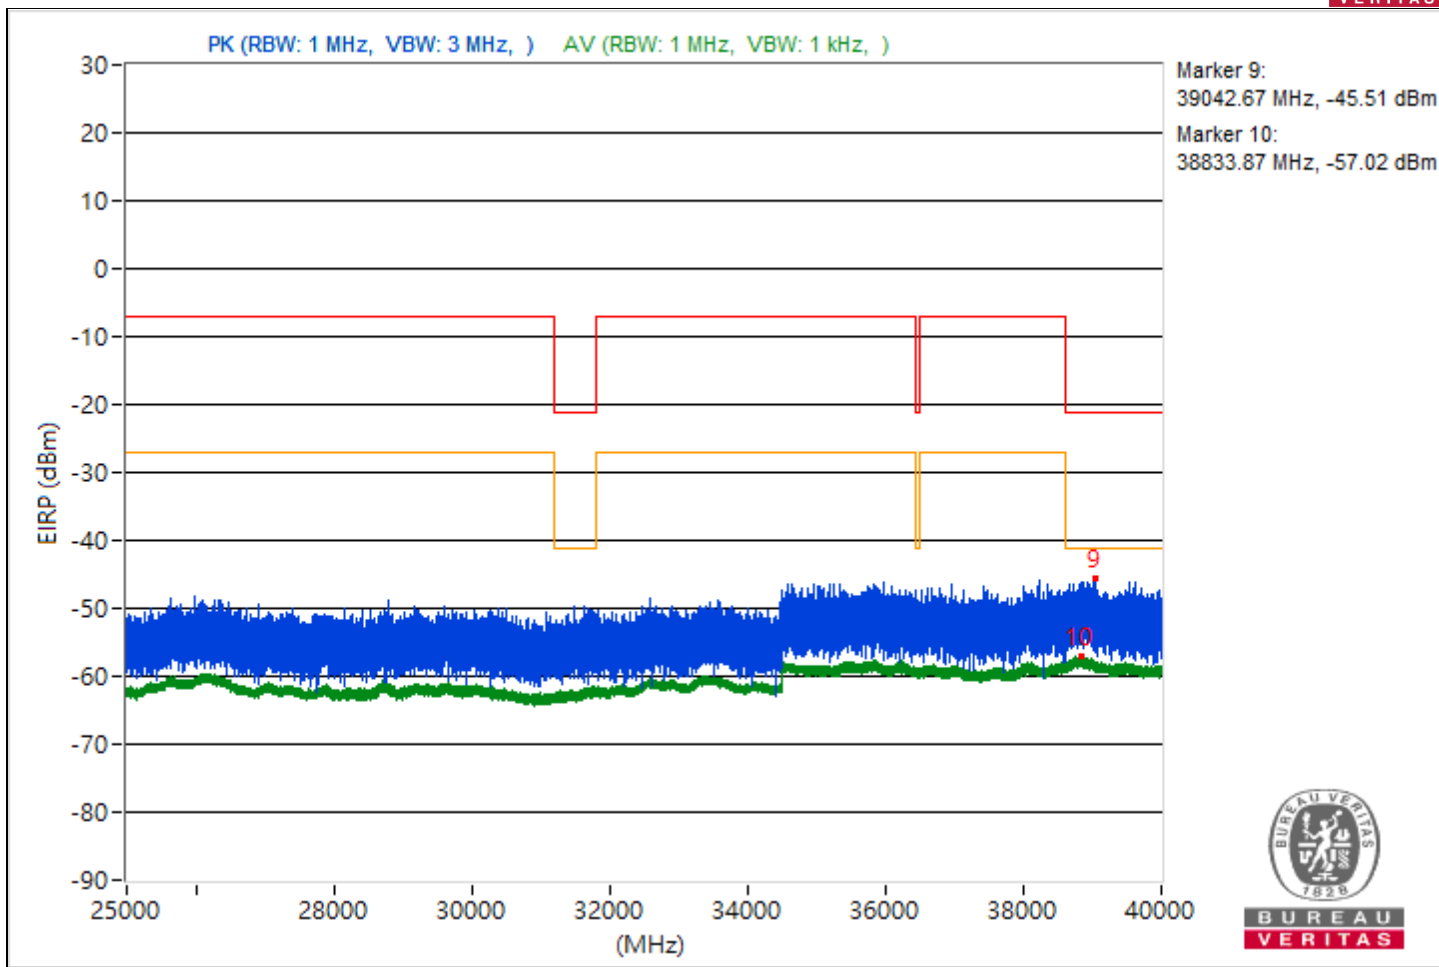



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5184.99	52.82 PK	68.26	-15.44	-47.36	4.92	-42.44
2	3770.6	42.43 AV	54	-11.57	-57.75	4.92	-52.83
3	11490.58	53.03 PK	74	-20.97	-47.15	4.92	-42.23
4	10672.53	41.07 AV	54	-12.93	-59.11	4.92	-54.19
5	19266	55.06 PK	74	-18.94	-45.12	4.92	-40.2
6	18804.5	43.19 AV	54	-10.81	-56.99	4.92	-52.07
7	23688.2	56.65 PK	74	-17.35	-43.53	4.92	-38.61
8	22240.9	45.08 AV	54	-8.92	-55.1	4.92	-50.18
9	38962.4	50.19 PK	74	-23.81	-49.99	4.92	-45.07
10	38811.56	38.44 AV	54	-15.56	-61.74	4.92	-56.82

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

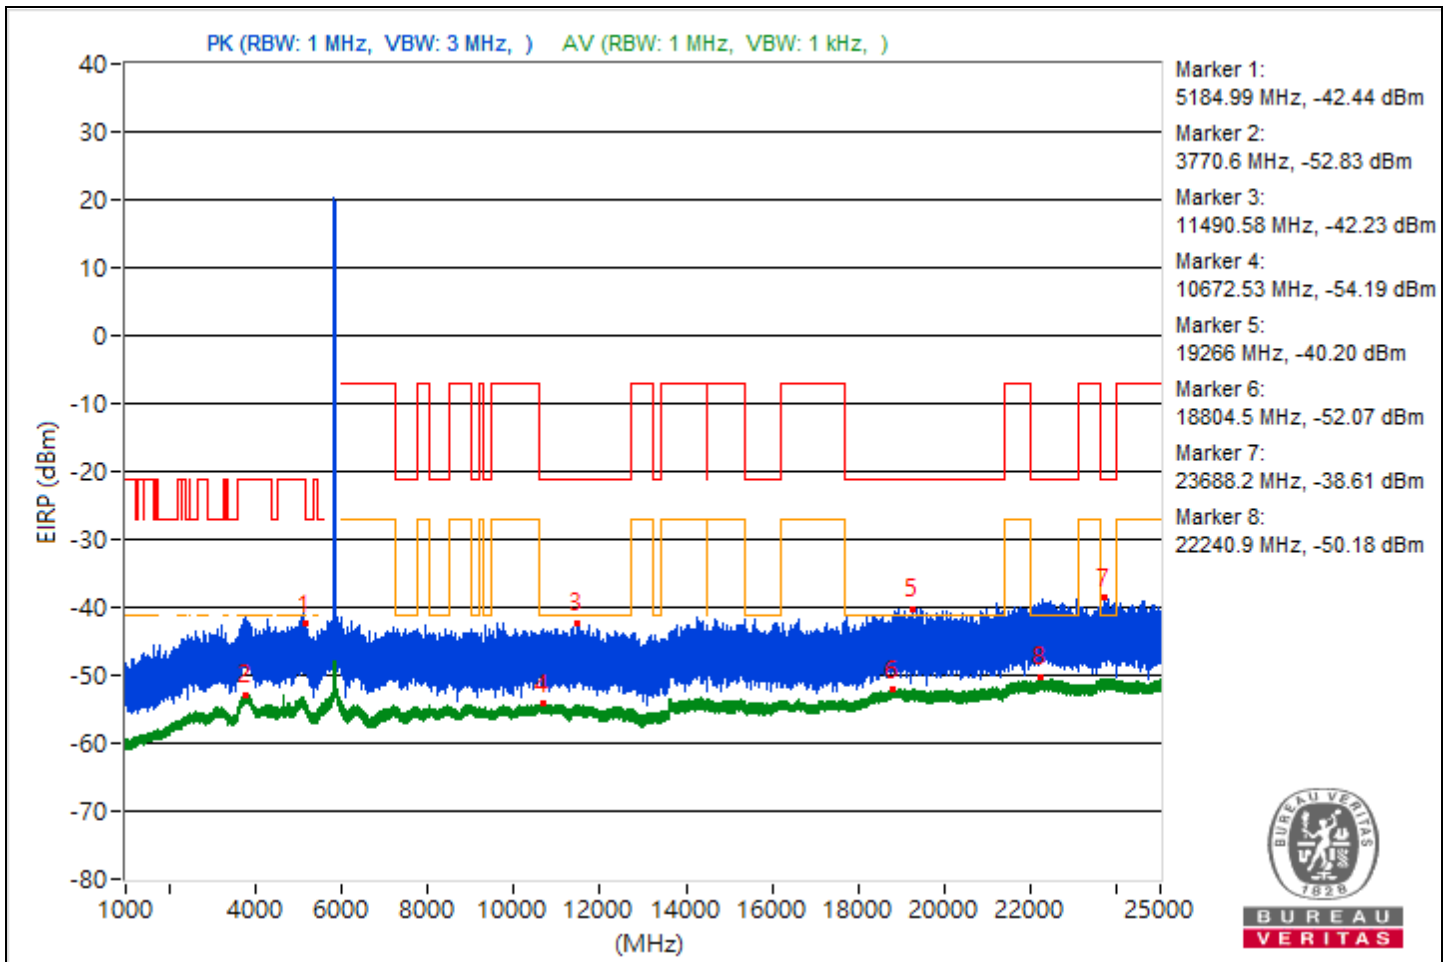

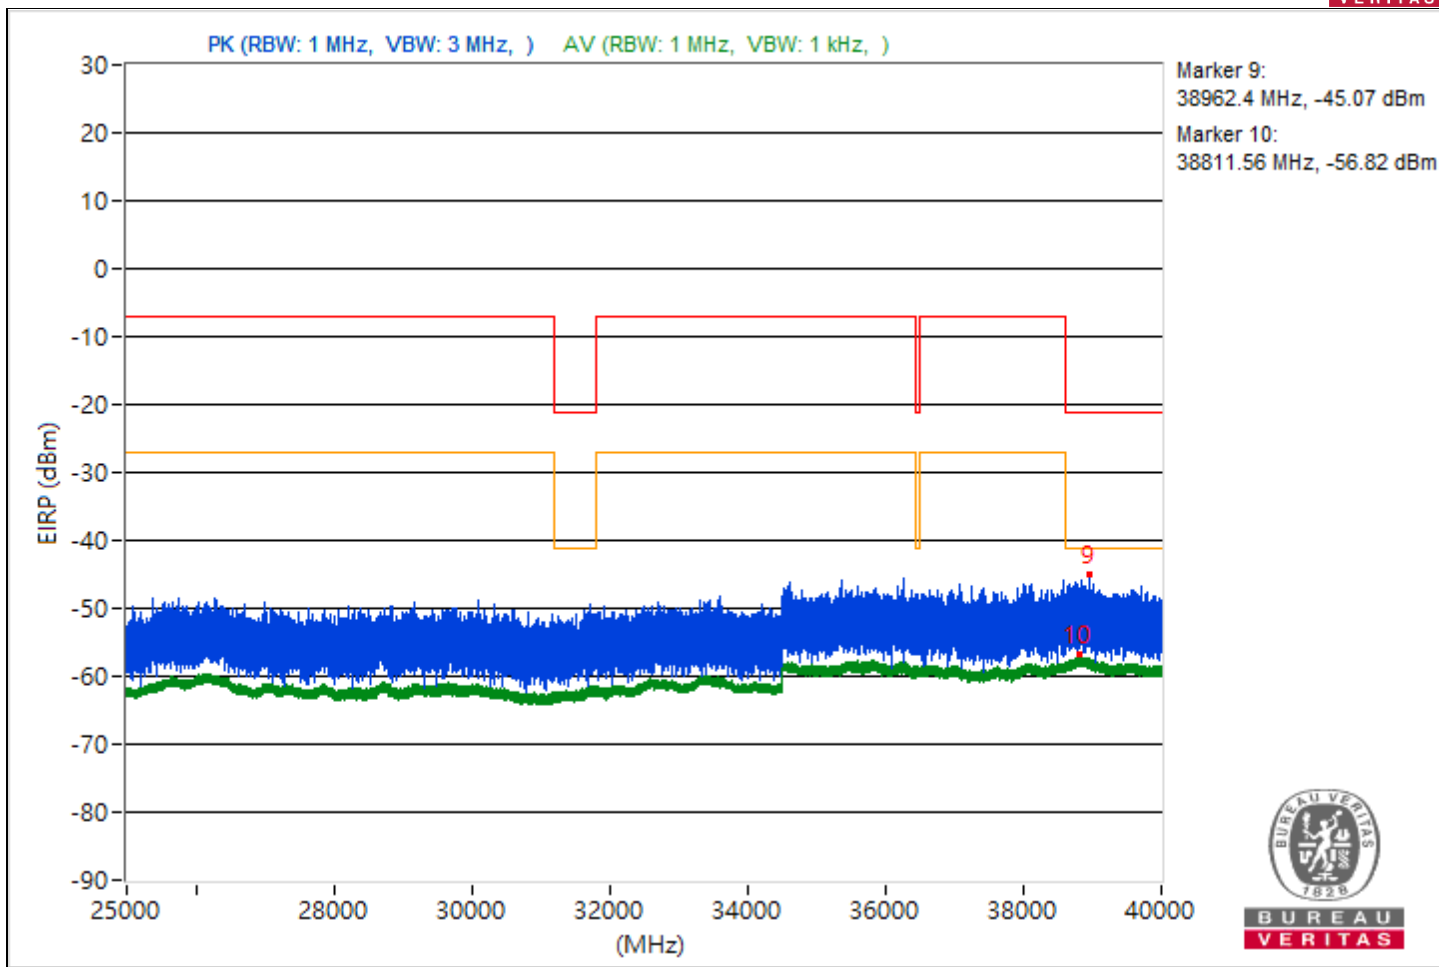





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5566.88	52.55 PK	68.26	-15.71	-47.63	4.92	-42.71
2	3829.87	42.47 AV	54	-11.53	-57.71	4.92	-52.79
3	11627.38	53.59 PK	74	-20.41	-46.59	4.92	-41.67
4	10645.24	41.1 AV	54	-12.9	-59.08	4.92	-54.16
5	18870	55.07 PK	74	-18.93	-45.11	4.92	-40.19
6	18874.8	43.31 AV	54	-10.69	-56.87	4.92	-51.95
7	23615.9	56.81 PK	74	-17.19	-43.37	4.92	-38.45
8	22383.8	44.73 AV	54	-9.27	-55.45	4.92	-50.53
9	38830.58	49.88 PK	74	-24.12	-50.3	4.92	-45.38
10	38841.96	38.35 AV	54	-15.65	-61.83	4.92	-56.91

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

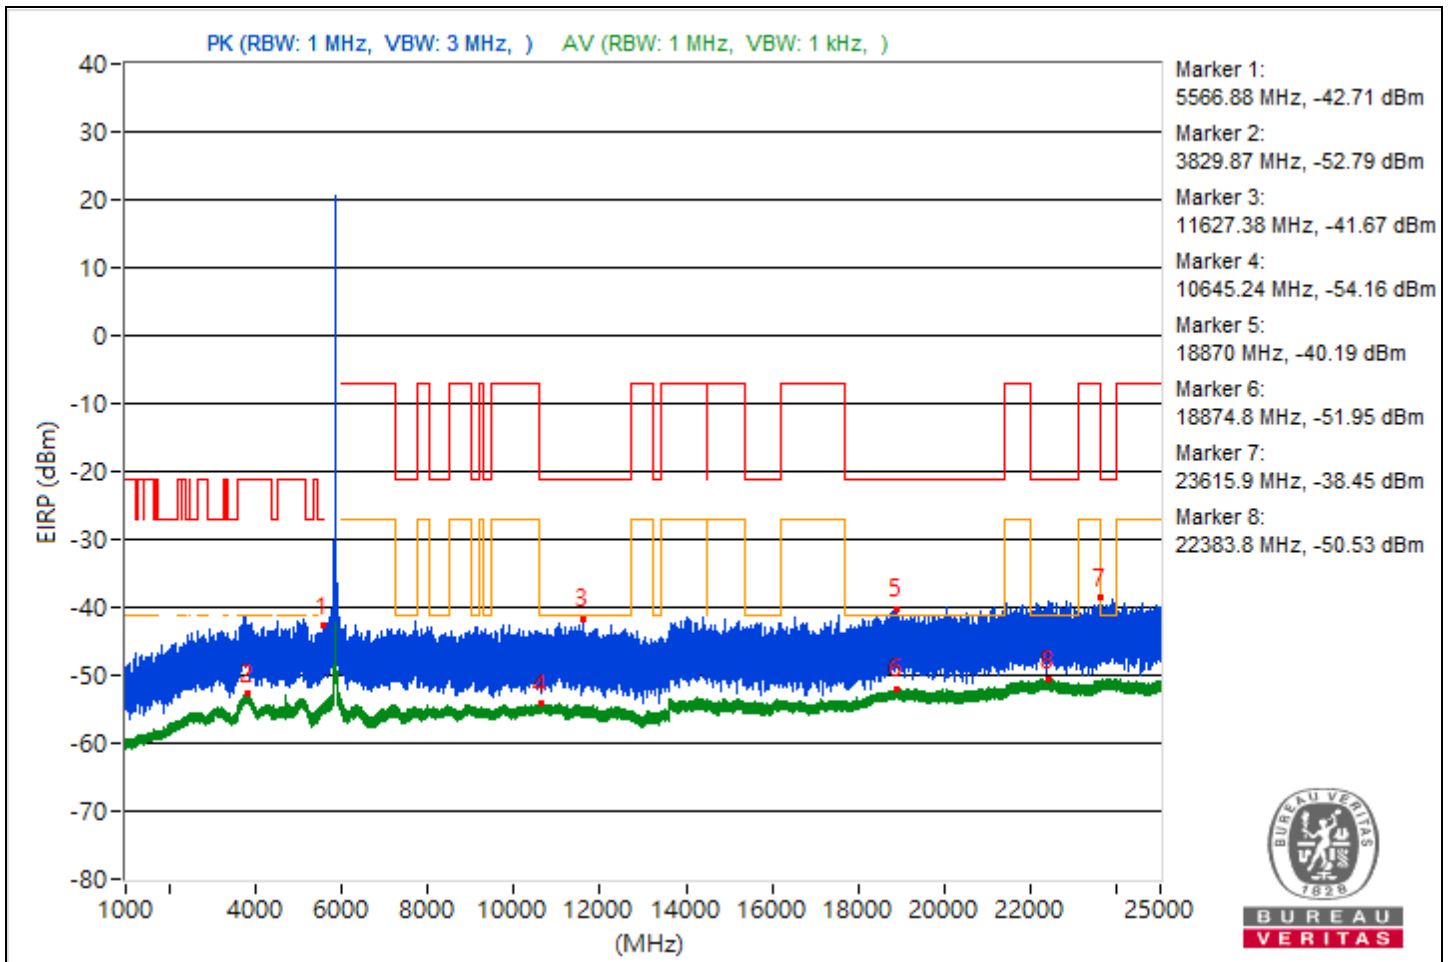

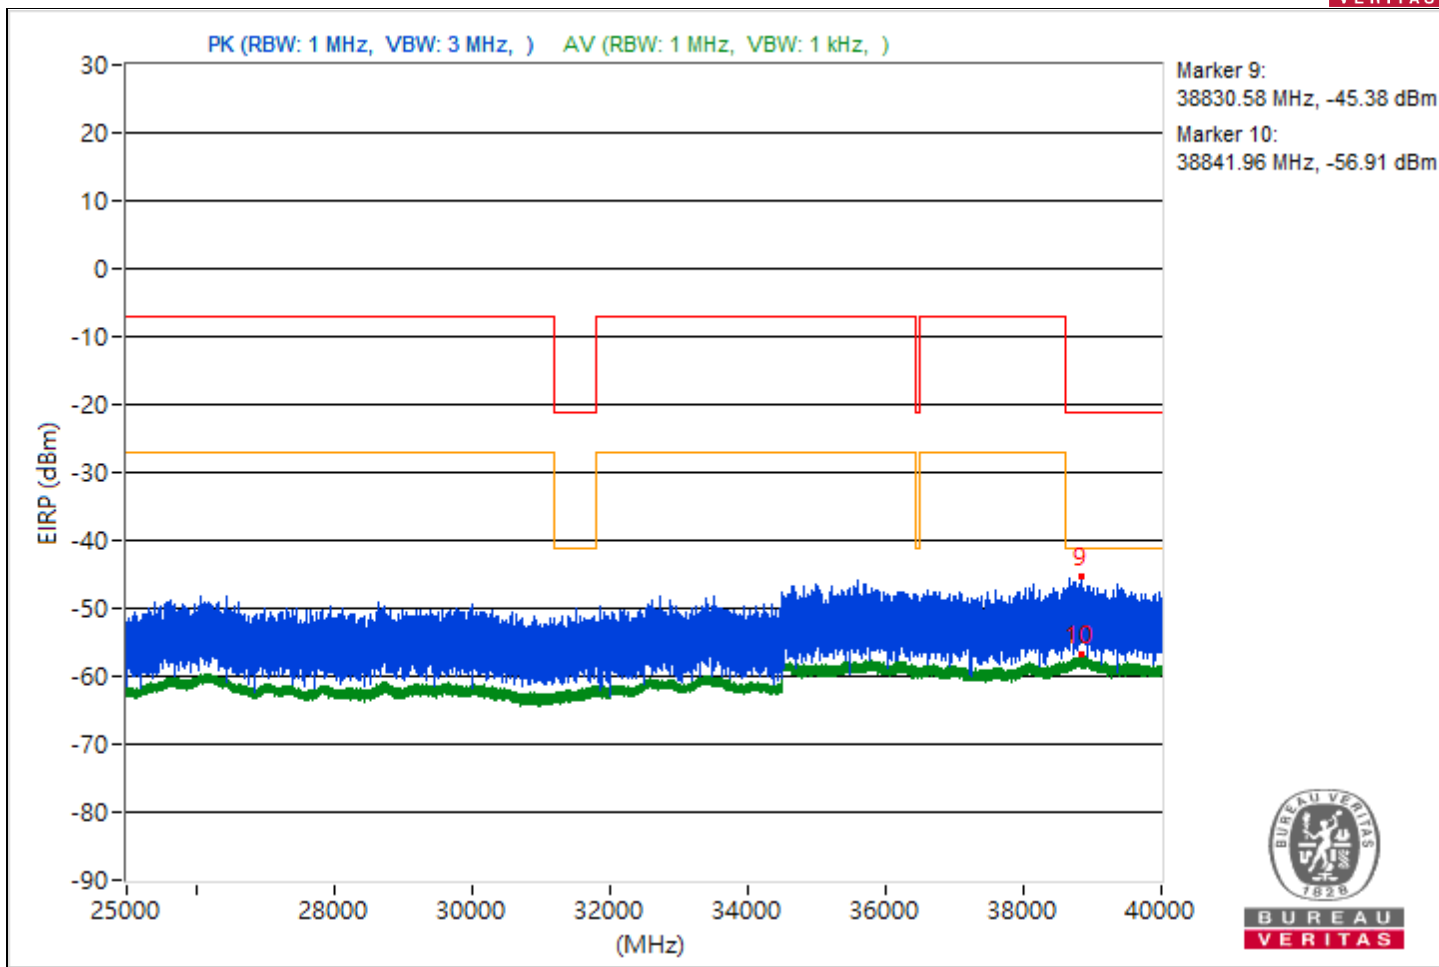



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4488.57	52.82 PK	68.26	-15.44	-47.36	4.92	-42.44
2	4707.98	42.93 AV	54	-11.07	-57.25	4.92	-52.33
3	11383.29	52.74 PK	74	-21.26	-47.44	4.92	-42.52
4	10618.22	41.15 AV	54	-12.85	-59.03	4.92	-54.11
5	19935.8	56.04 PK	74	-17.96	-44.14	4.92	-39.22
6	19049.4	43.37 AV	54	-10.63	-56.81	4.92	-51.89
7	22639.4	56.96 PK	74	-17.04	-43.22	4.92	-38.3
8	23626.8	44.87 AV	54	-9.13	-55.31	4.92	-50.39
9	38871.56	50.02 PK	74	-23.98	-50.16	4.92	-45.24
10	38806.31	38.17 AV	54	-15.83	-62.01	4.92	-57.09

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

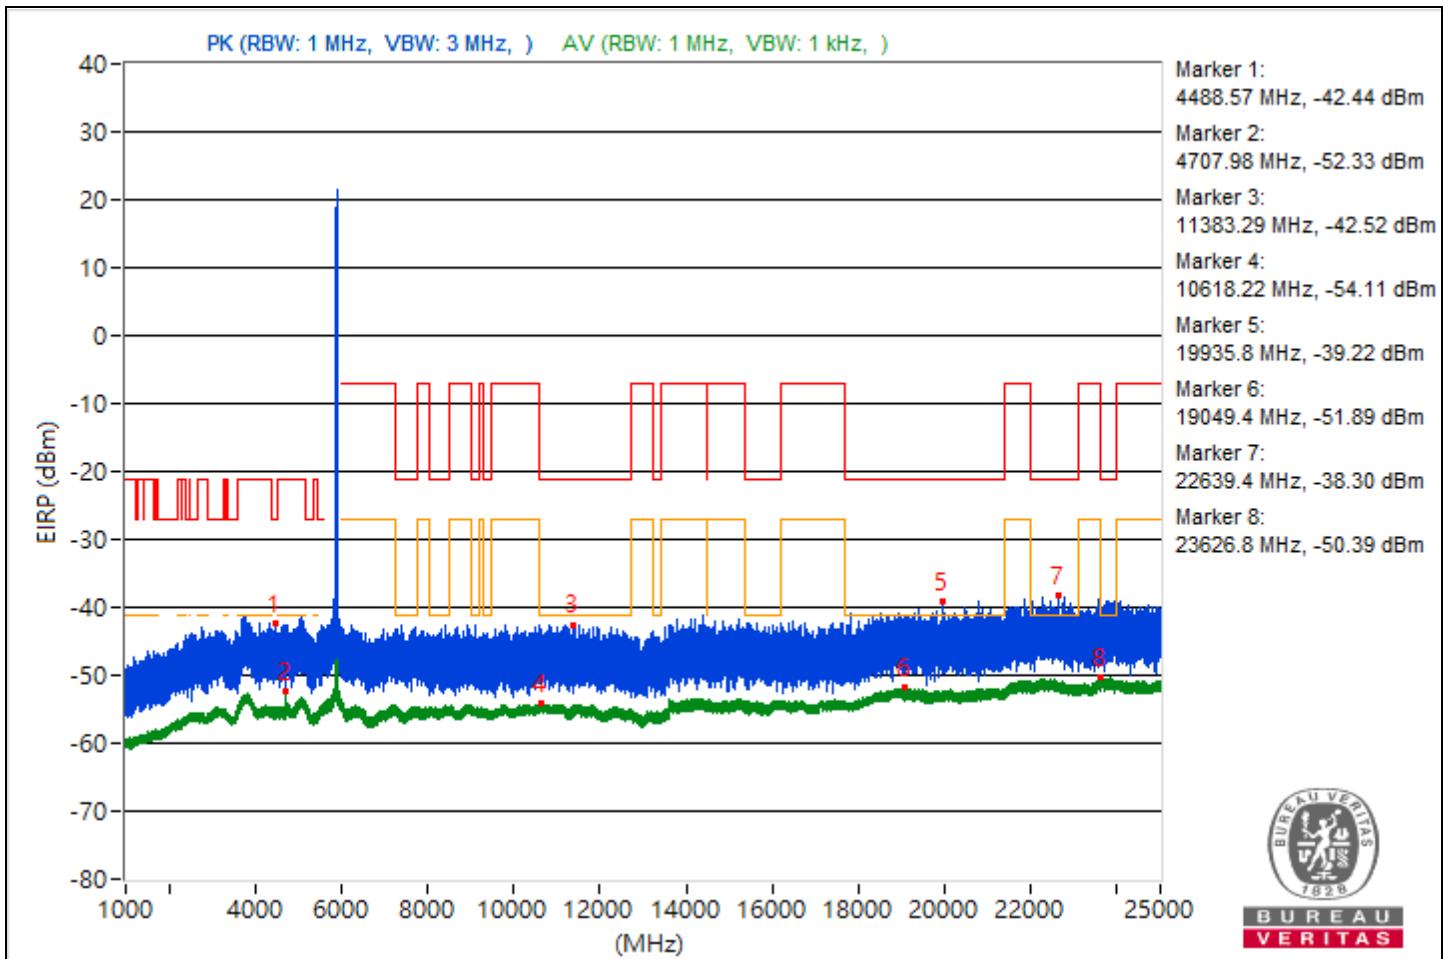

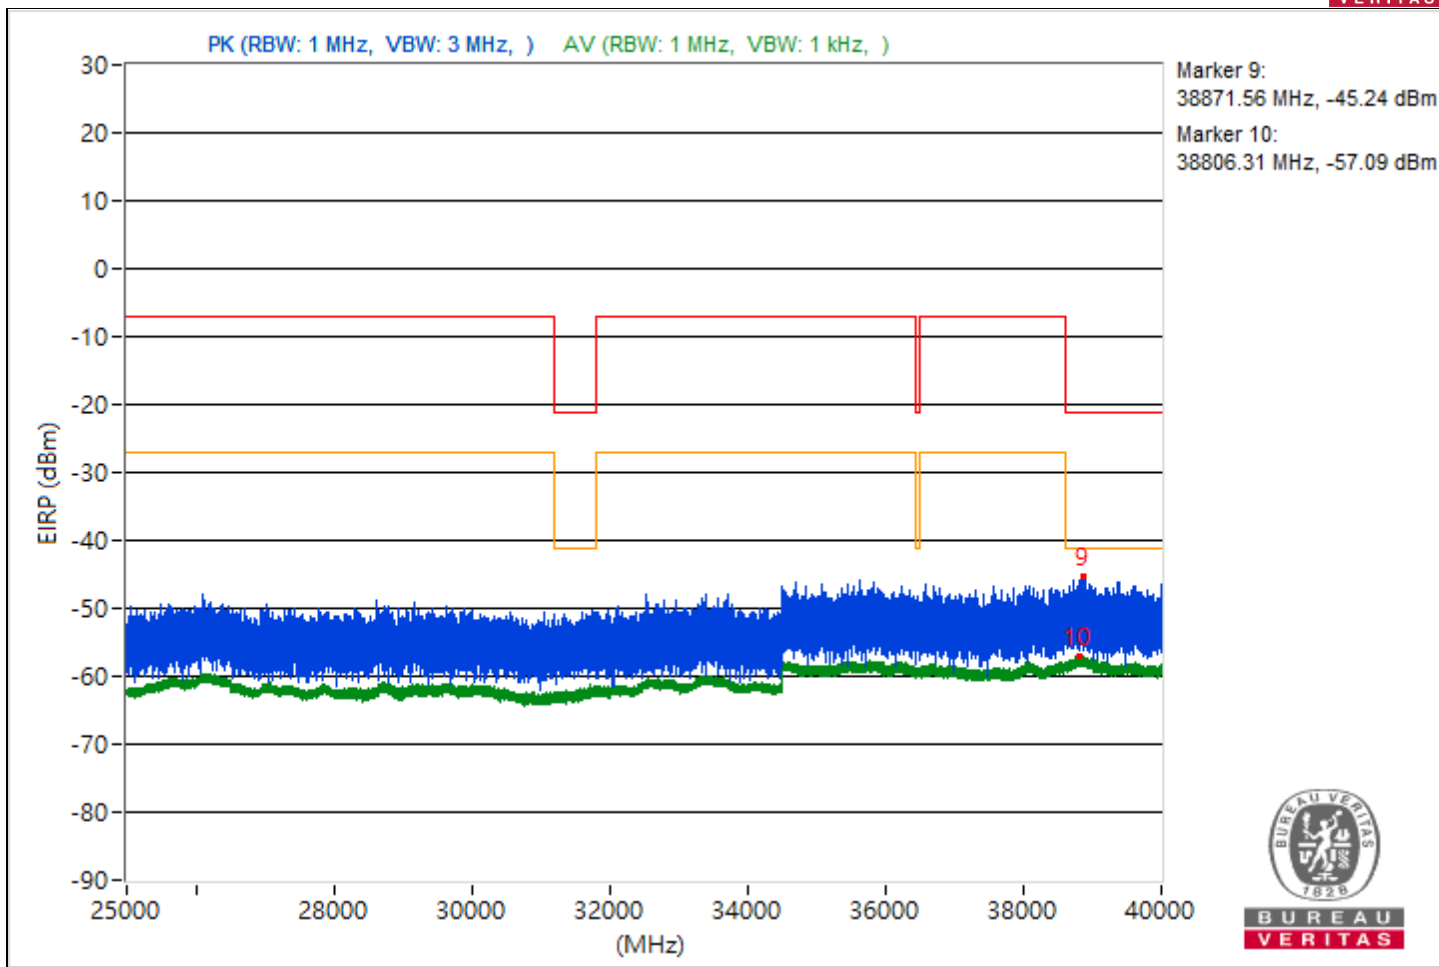



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3170	53.39 PK	68.26	-14.87	-46.79	4.92	-41.87
2	3807.16	42.5 AV	54	-11.5	-57.68	4.92	-52.76
3	11026.67	53.41 PK	74	-20.59	-46.77	4.92	-41.85
4	10703.64	41.14 AV	54	-12.86	-59.04	4.92	-54.12
5	19434.7	54.81 PK	74	-19.19	-45.37	4.92	-40.45
6	19117.3	43.19 AV	54	-10.81	-56.99	4.92	-52.07
7	22322.3	56.98 PK	74	-17.02	-43.2	4.92	-38.28
8	23817.3	44.79 AV	54	-9.21	-55.39	4.92	-50.47
9	38963.73	48.72 PK	74	-25.28	-51.46	4.92	-46.54
10	38851.38	38.14 AV	54	-15.86	-62.04	4.92	-57.12

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

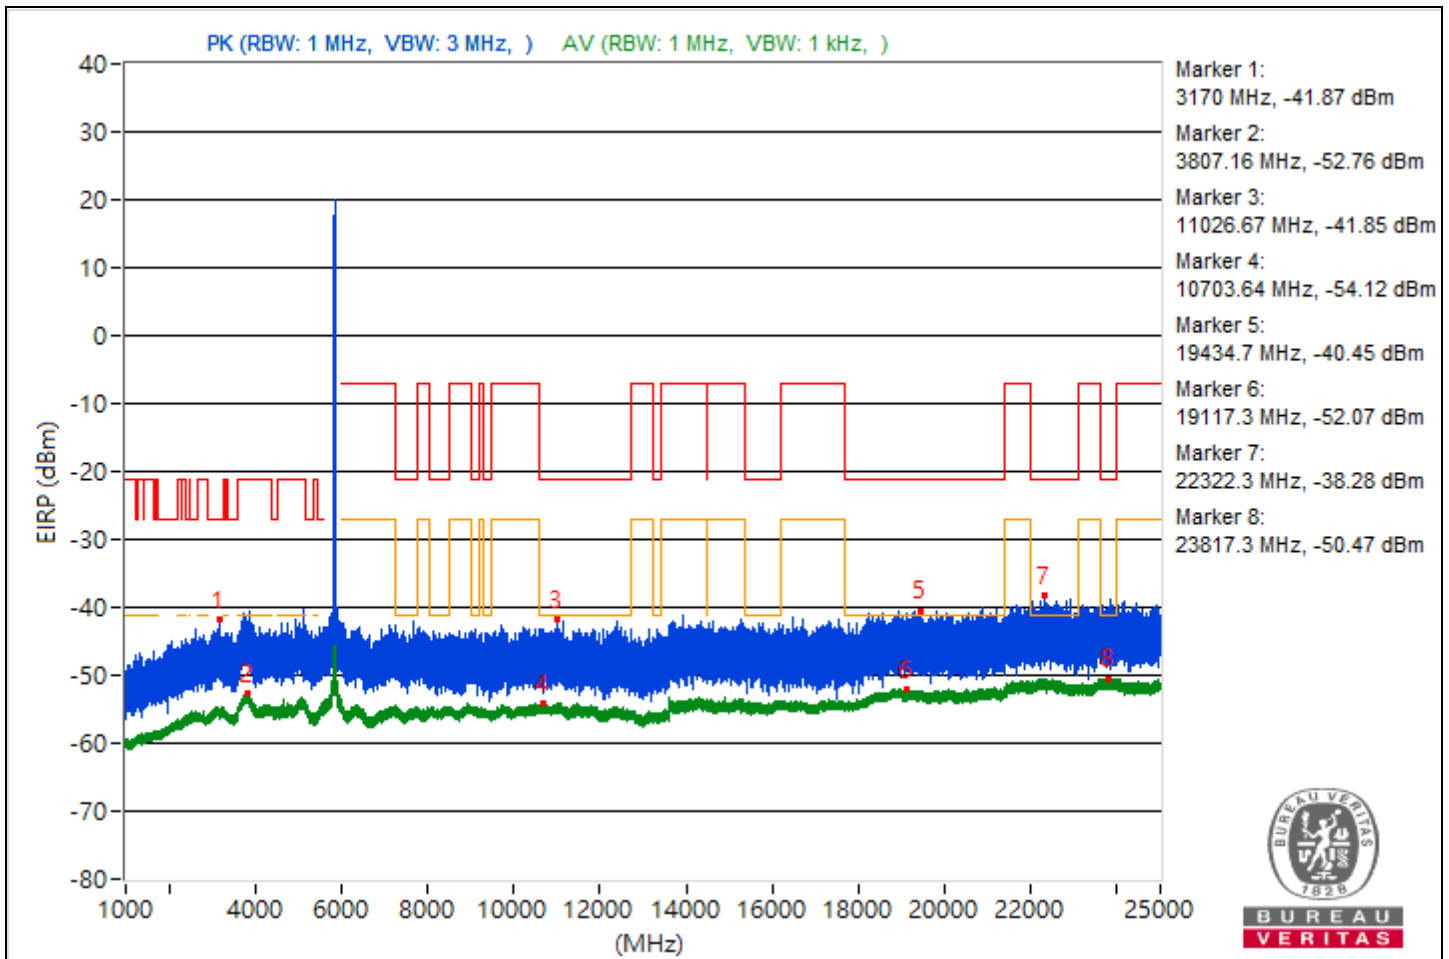

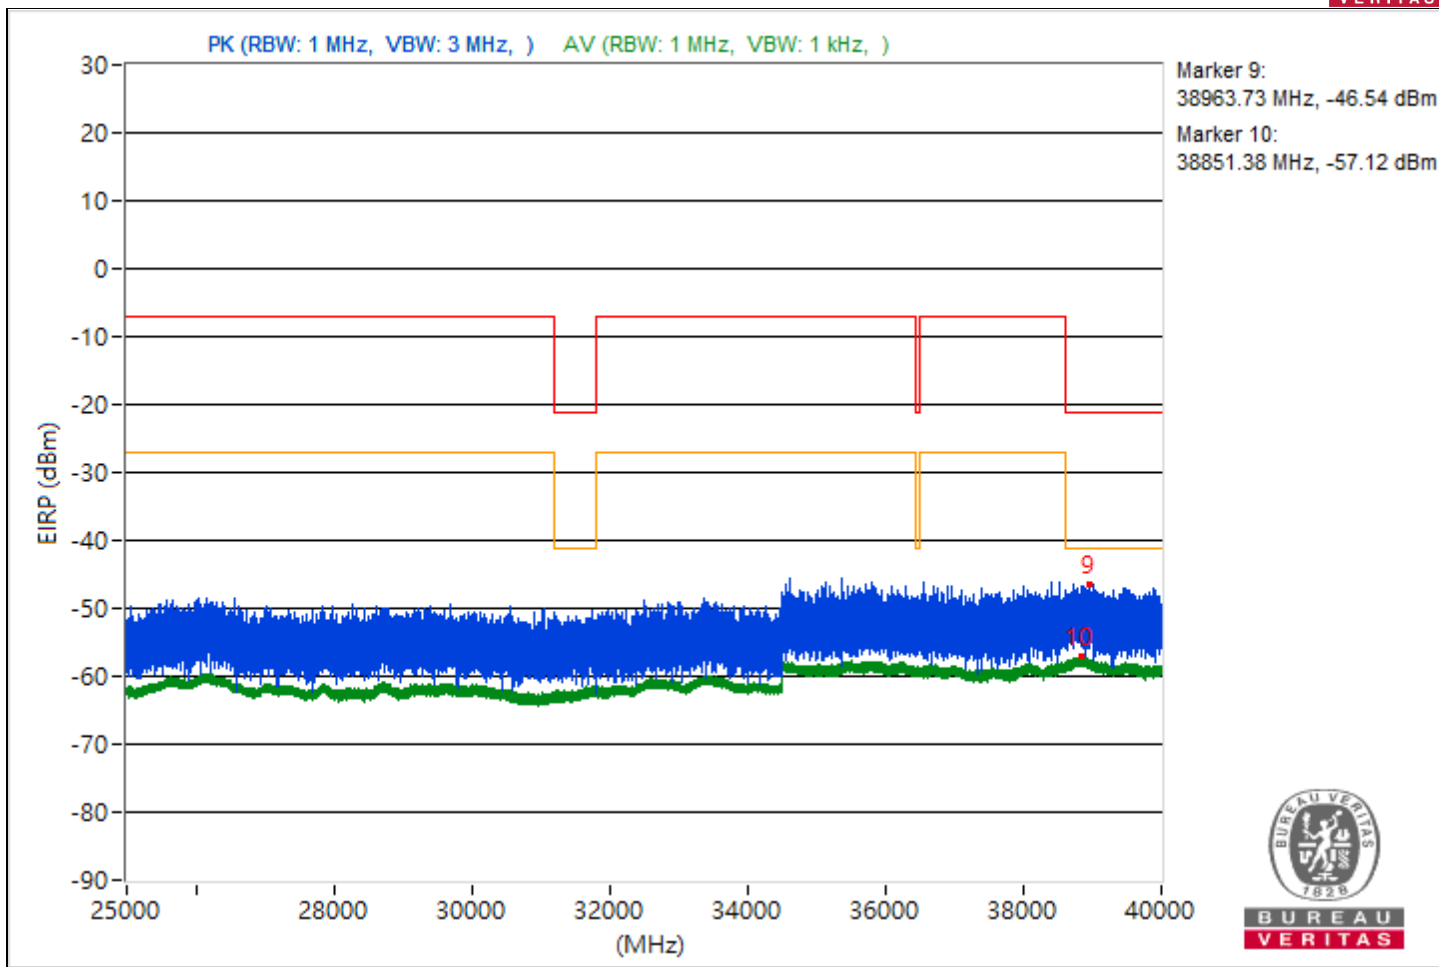



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5182.19	52.88 PK	68.26	-15.38	-47.3	4.92	-42.38
2	3814.54	42.5 AV	54	-11.5	-57.68	4.92	-52.76
3	11739.11	52.97 PK	74	-21.03	-47.21	4.92	-42.29
4	10632	41.16 AV	54	-12.84	-59.02	4.92	-54.1
5	18967.7	55.6 PK	74	-18.4	-44.58	4.92	-39.66
6	19040.6	43.3 AV	54	-10.7	-56.88	4.92	-51.96
7	23636	58.29 PK	74	-15.71	-41.89	4.92	-36.97
8	23779	44.84 AV	54	-9.16	-55.34	4.92	-50.42
9	38802.93	49.78 PK	74	-24.22	-50.4	4.92	-45.48
10	38818.76	38.34 AV	54	-15.66	-61.84	4.92	-56.92

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

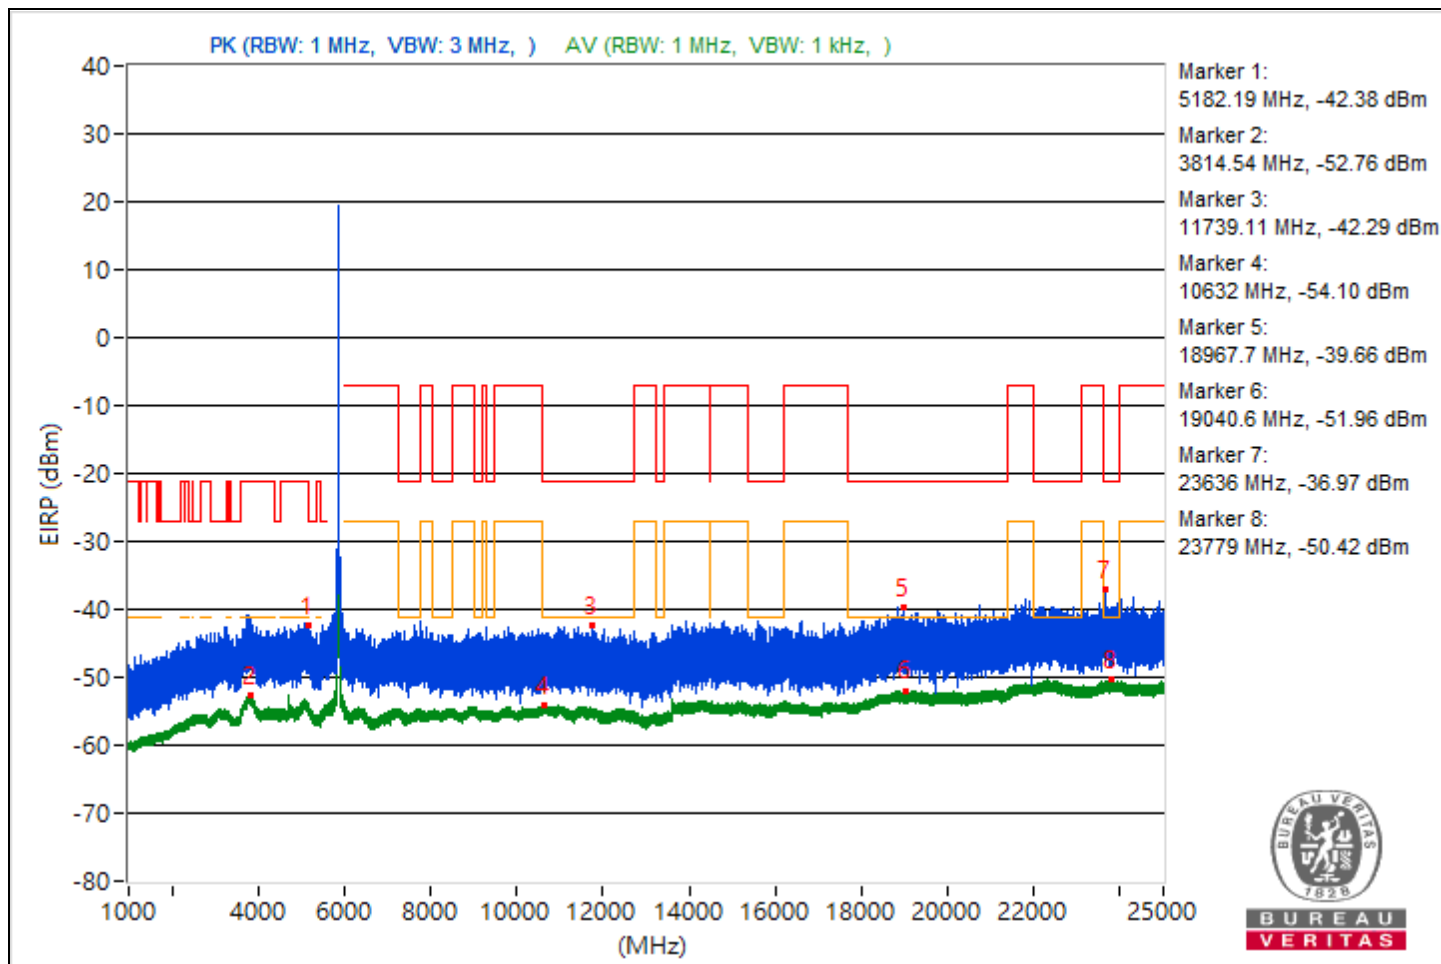

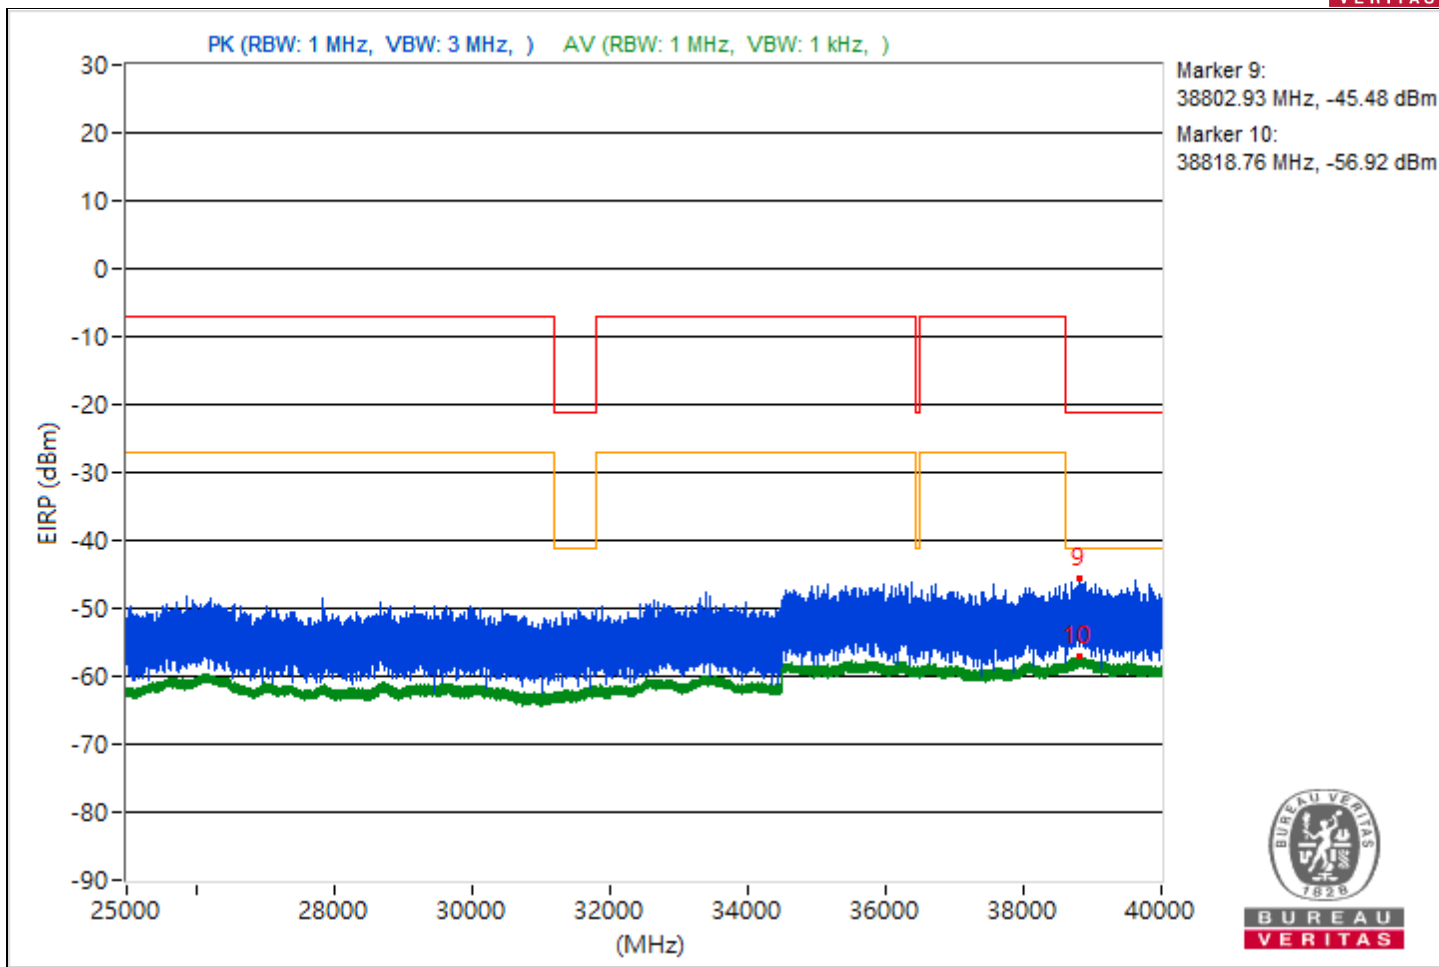



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4456.37	52.47 PK	68.26	-15.79	-47.71	4.92	-42.79
2	3820.69	42.49 AV	54	-11.51	-57.69	4.92	-52.77
3	12483.64	53.37 PK	74	-20.63	-46.81	4.92	-41.89
4	11038.04	41.02 AV	54	-12.98	-59.16	4.92	-54.24
5	19389.4	55.24 PK	74	-18.76	-44.94	4.92	-40.02
6	18818.8	43.43 AV	54	-10.57	-56.75	4.92	-51.83
7	22519.6	56.78 PK	74	-17.22	-43.4	4.92	-38.48
8	22361.5	44.74 AV	54	-9.26	-55.44	4.92	-50.52
9	39781.51	49.11 PK	74	-24.89	-51.07	4.92	-46.15
10	38849.33	38.18 AV	54	-15.82	-62	4.92	-57.08

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

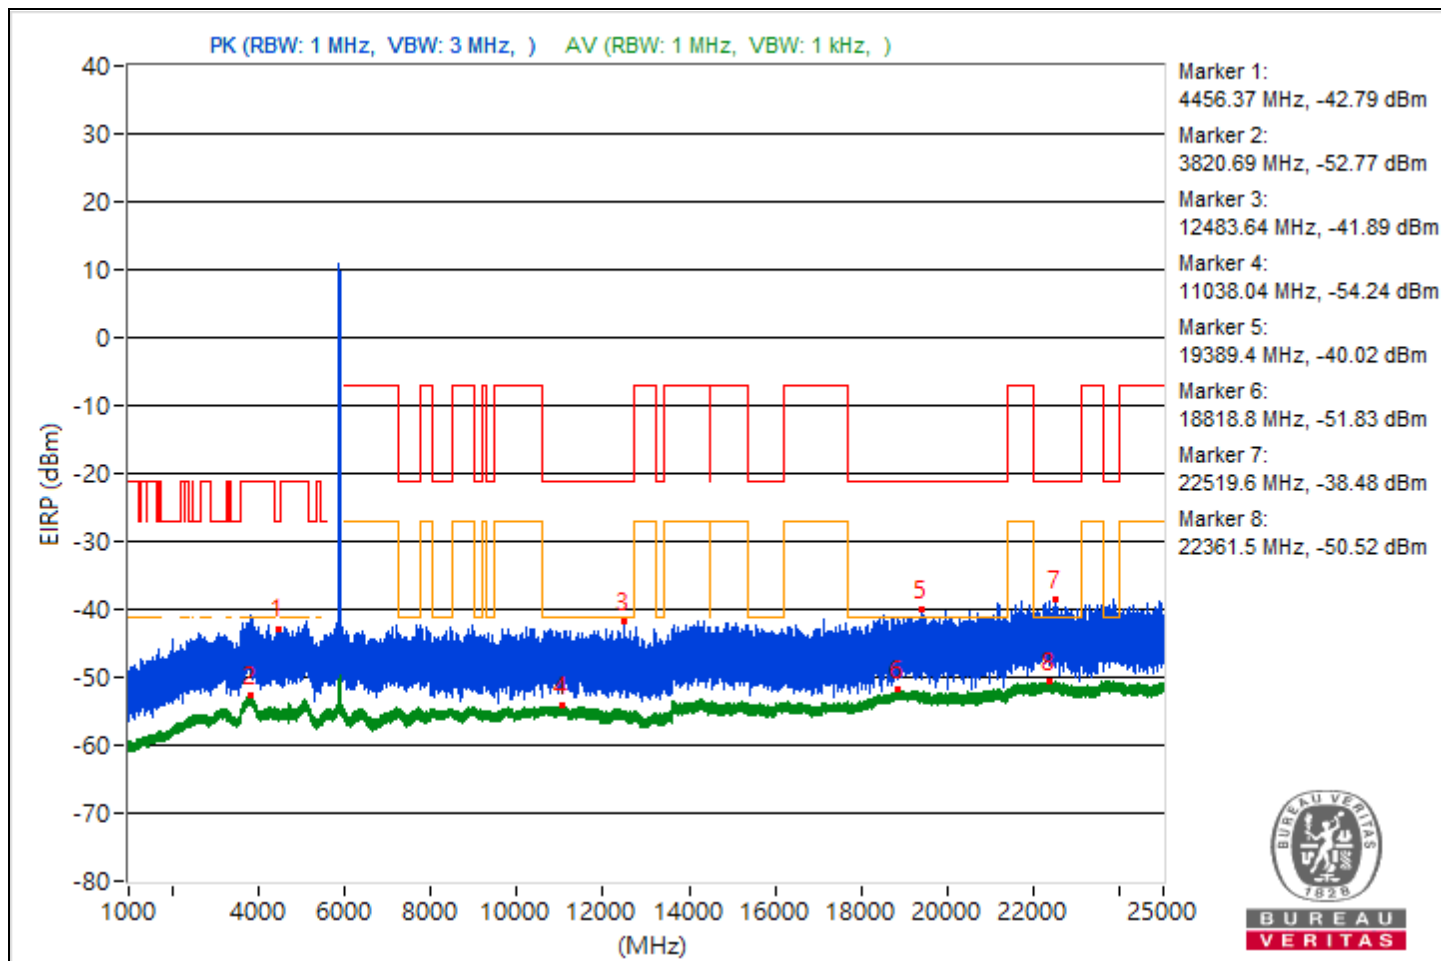

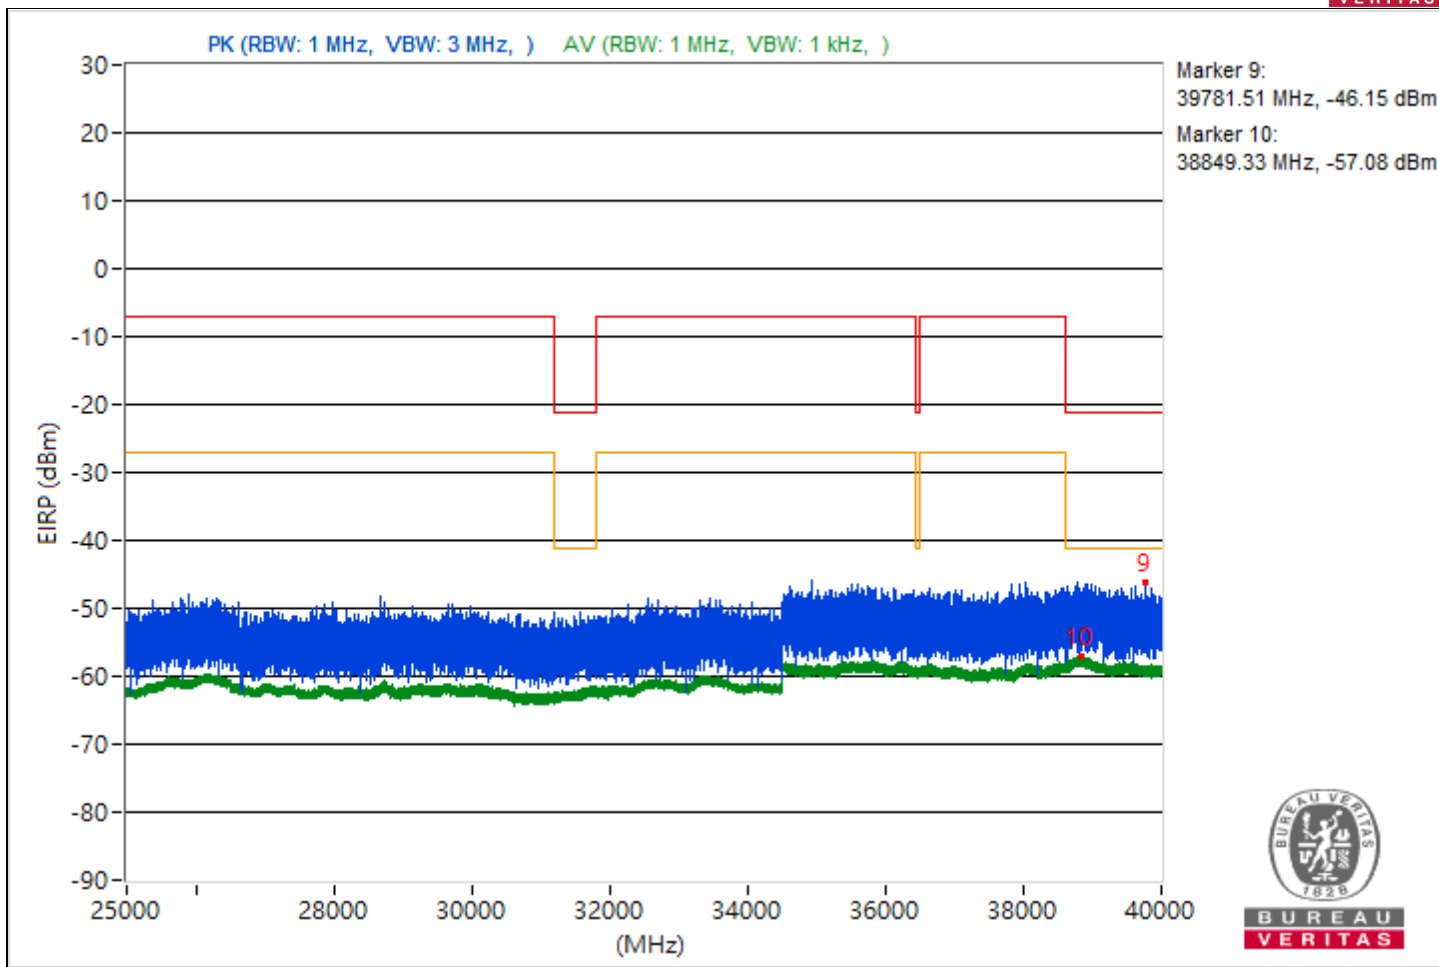



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5560.81	53.83 PK	68.26	-14.43	-46.35	4.92	-41.43
2	3760.1	42.53 AV	54	-11.47	-57.65	4.92	-52.73
3	7716.66	53.09 PK	74	-20.91	-47.09	4.92	-42.17
4	11461.87	41.24 AV	54	-12.76	-58.94	4.92	-54.02
5	19851.1	55.03 PK	74	-18.97	-45.15	4.92	-40.23
6	18961.5	43.22 AV	54	-10.78	-56.96	4.92	-52.04
7	23737.6	57.76 PK	74	-16.24	-42.42	4.92	-37.5
8	22530.5	44.78 AV	54	-9.22	-55.4	4.92	-50.48
9	38773.87	49.4 PK	74	-24.6	-50.78	4.92	-45.86
10	38924.8	38.11 AV	54	-15.89	-62.07	4.92	-57.15

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

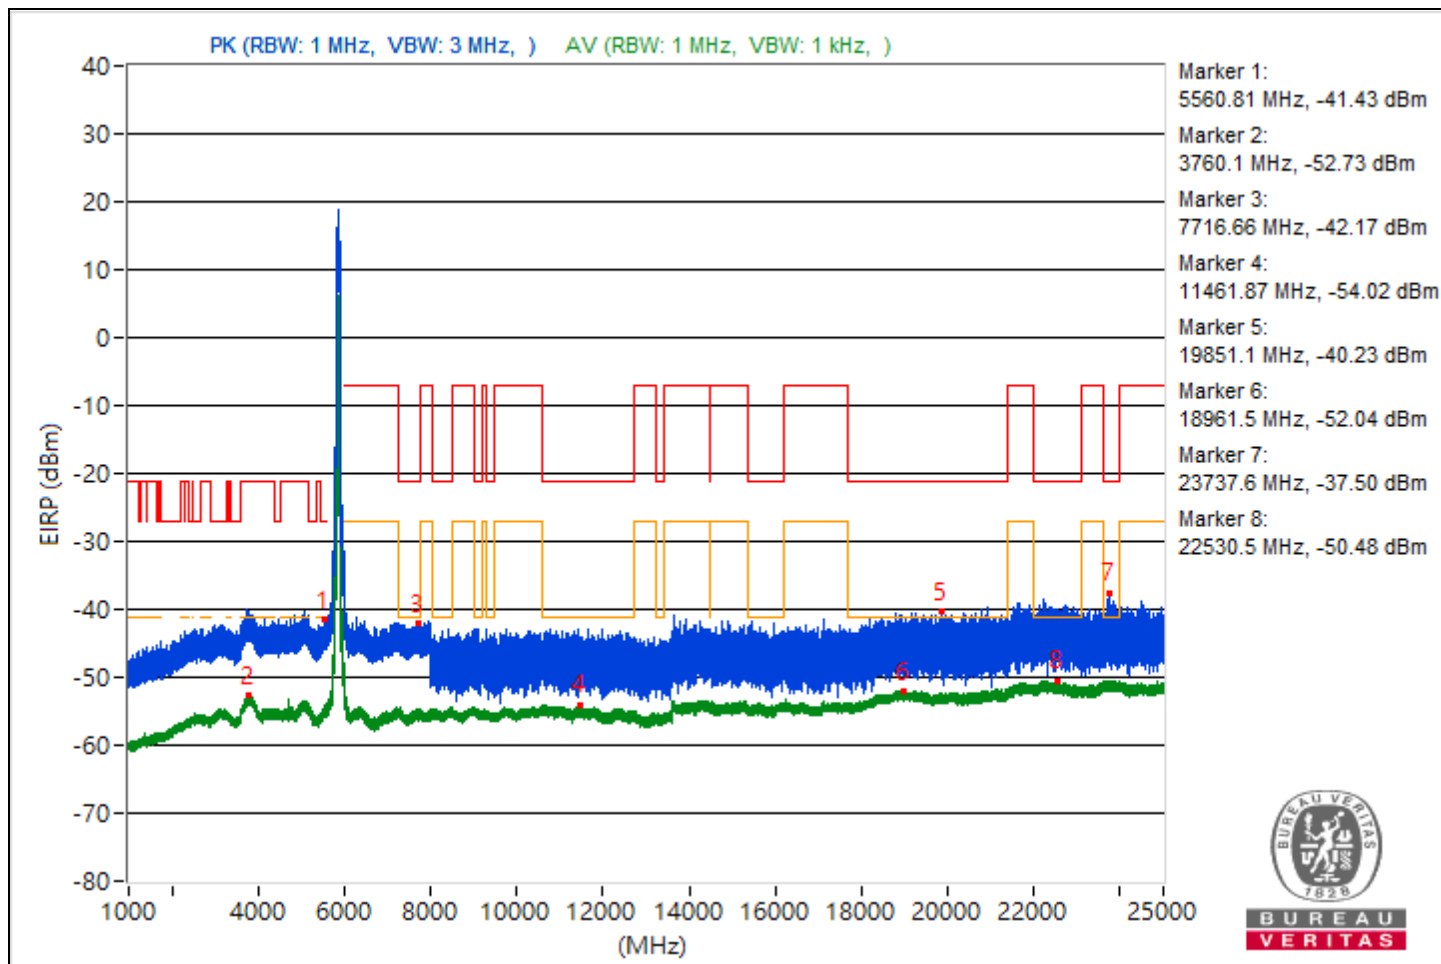

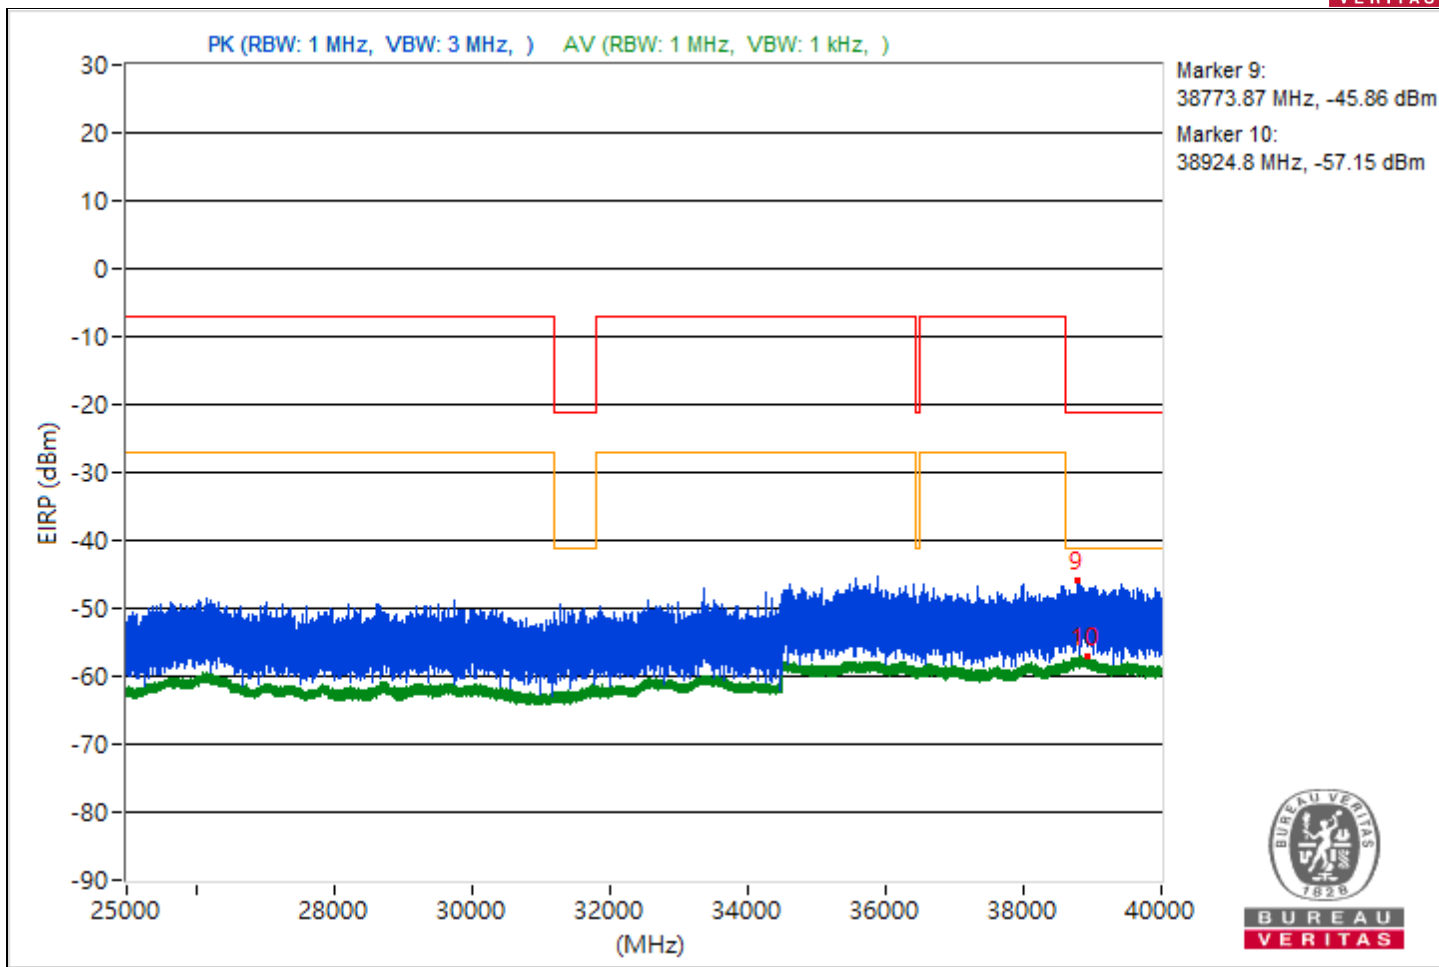



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5162.12	53.13 PK	68.26	-15.13	-47.05	4.92	-42.13
2	4651.9	42.73 AV	54	-11.27	-57.45	4.92	-52.53
3	12410.84	53.06 PK	74	-20.94	-47.12	4.92	-42.2
4	10697.87	41.17 AV	54	-12.83	-59.01	4.92	-54.09
5	19282.1	56.06 PK	74	-17.94	-44.12	4.92	-39.2
6	18893	43.38 AV	54	-10.62	-56.8	4.92	-51.88
7	22359.2	57.48 PK	74	-16.52	-42.7	4.92	-37.78
8	23725.1	44.72 AV	54	-9.28	-55.46	4.92	-50.54
9	38742.31	49.71 PK	74	-24.29	-50.47	4.92	-45.55
10	38840.89	38.14 AV	54	-15.86	-62.04	4.92	-57.12

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

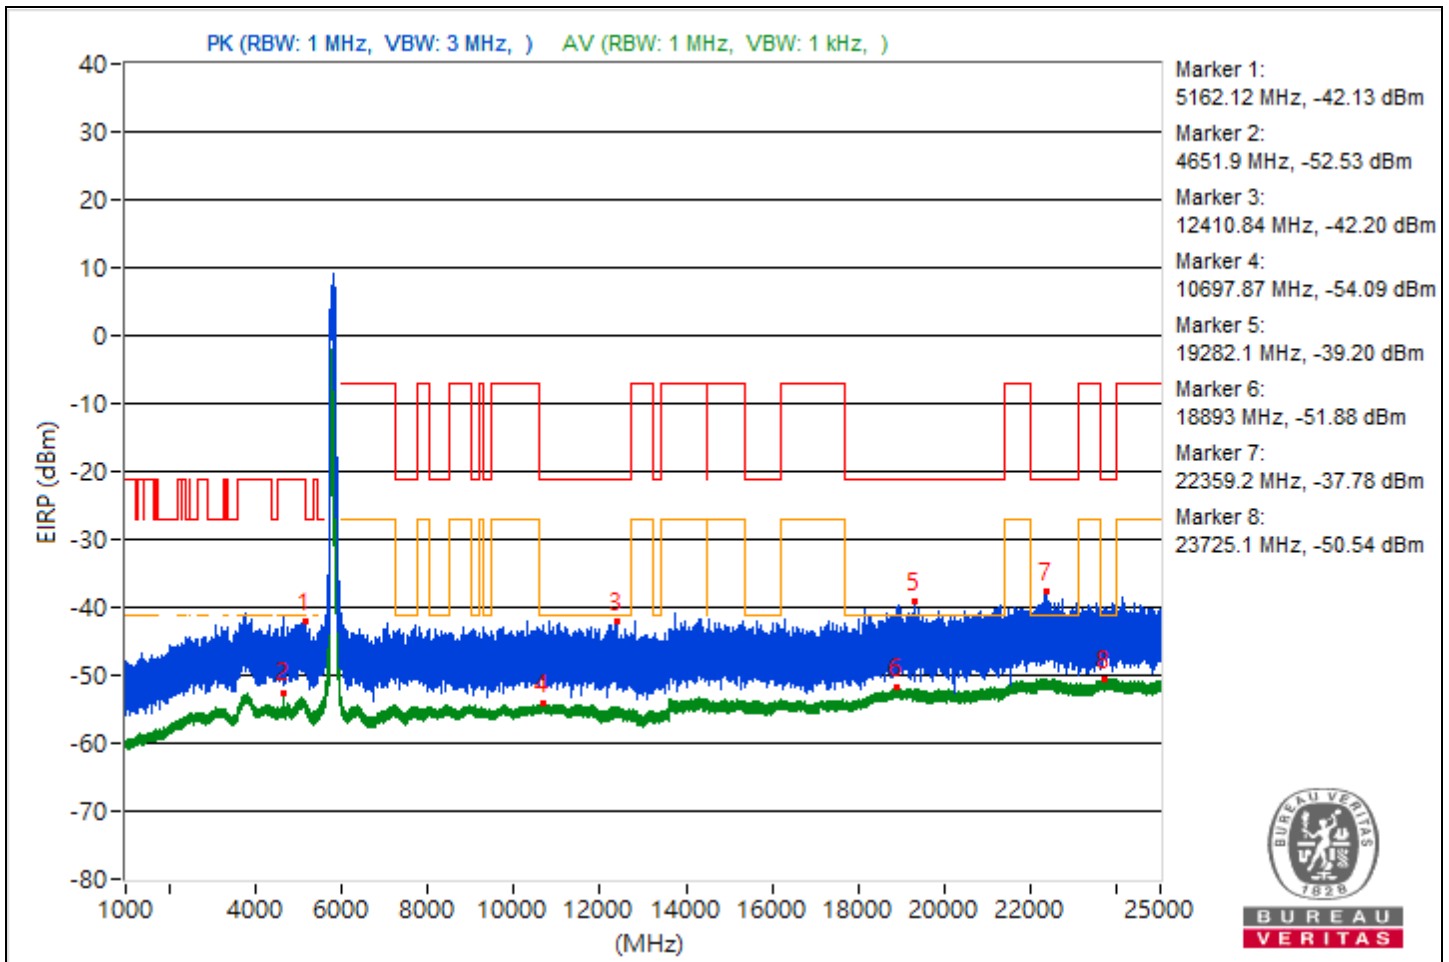

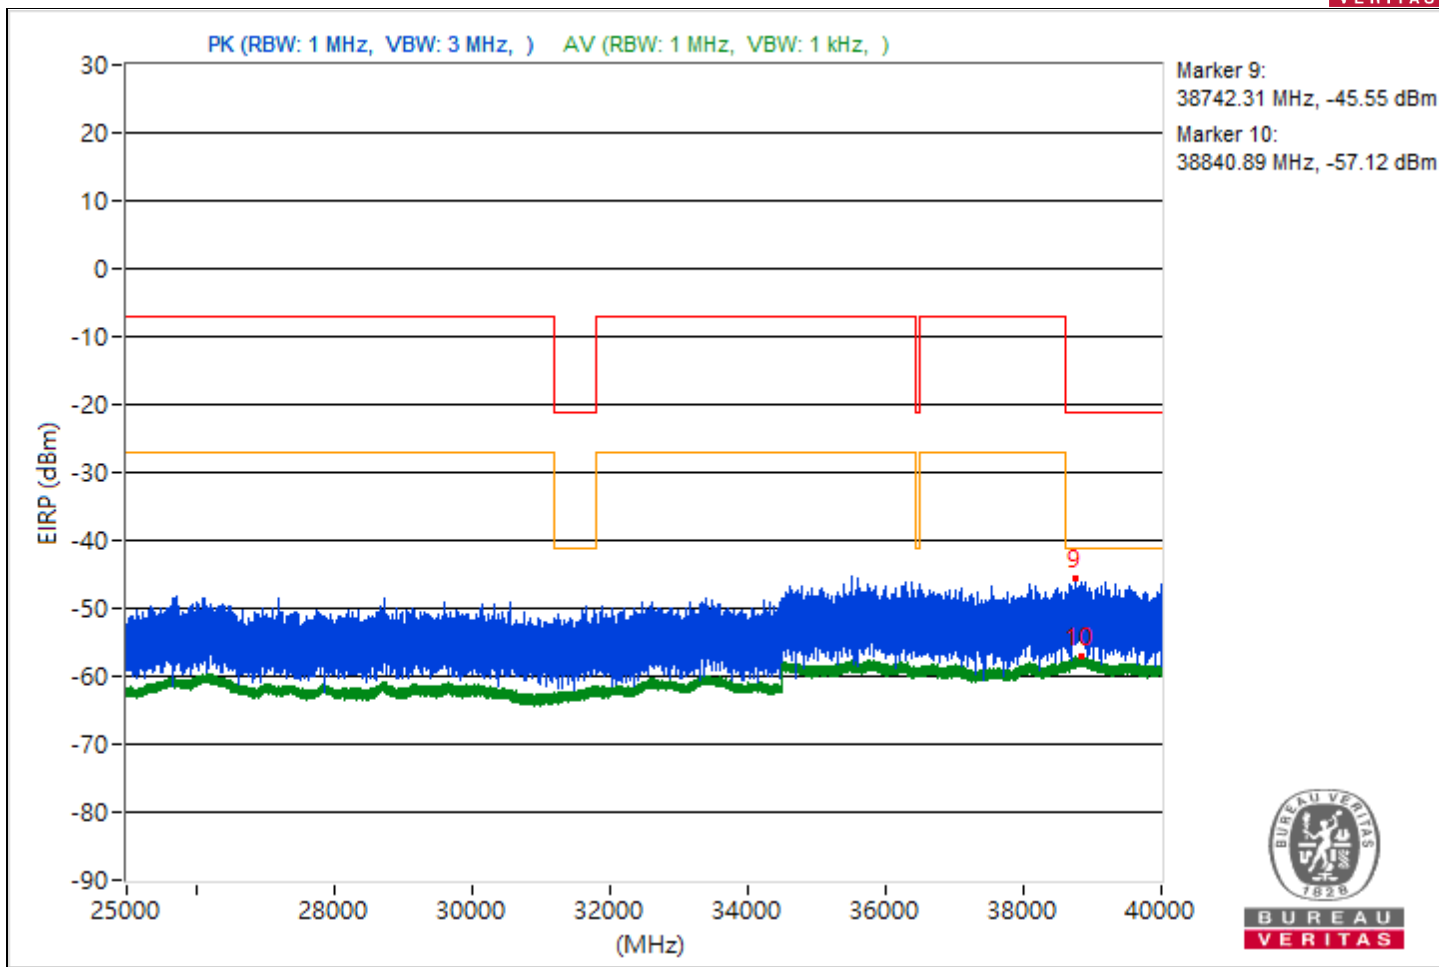



RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5575.59	53.62 PK	68.26	-14.64	-46.56	4.92	-41.64
2	4651.98	42.7 AV	54	-11.3	-57.48	4.92	-52.56
3	10788.09	52.82 PK	74	-21.18	-47.36	4.92	-42.44
4	10617.6	41.05 AV	54	-12.95	-59.13	4.92	-54.21
5	19994.7	54.87 PK	74	-19.13	-45.31	4.92	-40.39
6	18977.7	43.23 AV	54	-10.77	-56.95	4.92	-52.03
7	22133.1	57.12 PK	74	-16.88	-43.06	4.92	-38.14
8	23666.5	44.8 AV	54	-9.2	-55.38	4.92	-50.46
9	39209.78	49.56 PK	74	-24.44	-50.62	4.92	-45.7
10	38836.36	38.29 AV	54	-15.71	-61.89	4.92	-56.97

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

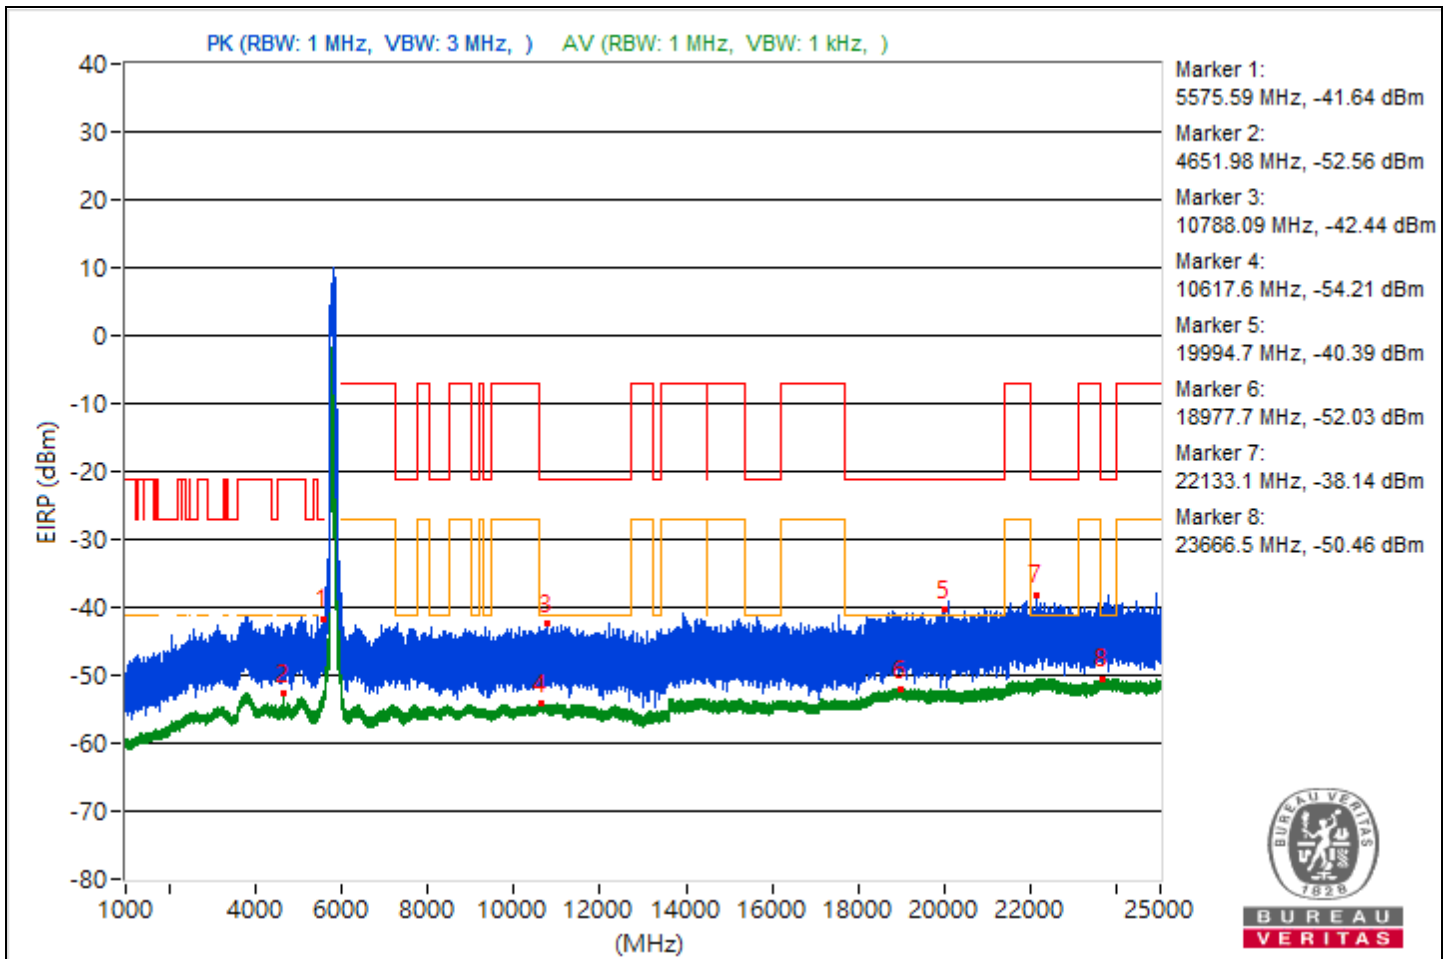

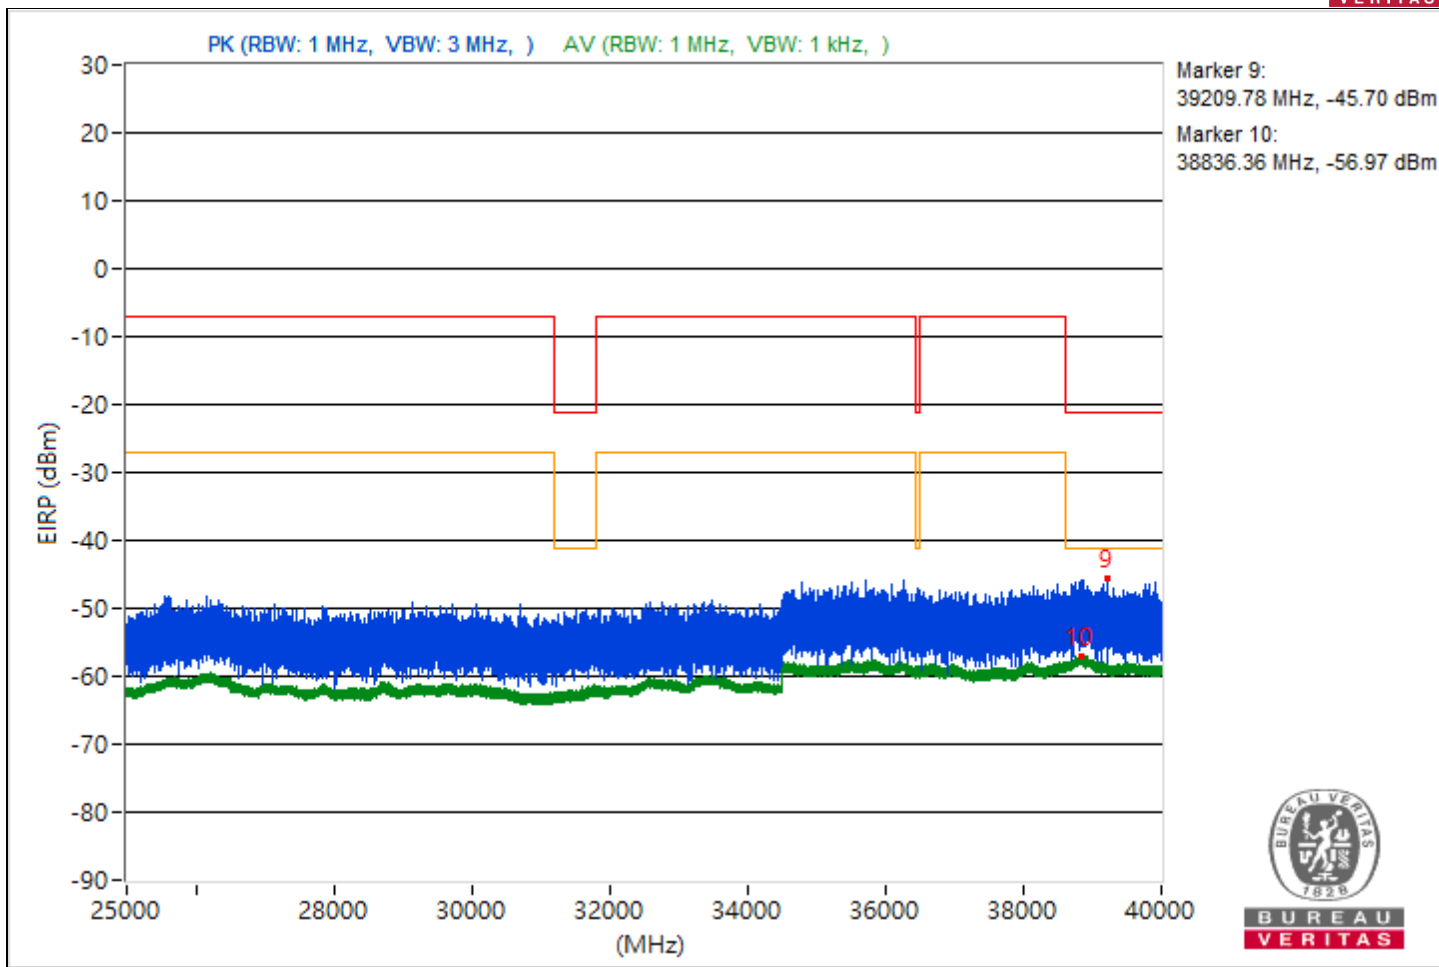




Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5845.65	117.9 PK			17.72	4.92	22.64
2	#5633.63	62.66 PK	68.26	-5.6	-37.52	4.92	-32.6
3	#5676.18	63.22 PK	87.63	-24.41	-36.96	4.92	-32.04
4	#5710.71	61.83 PK	108.26	-46.43	-38.35	4.92	-33.43
5	#5720.49	60.45 PK	111.98	-51.53	-39.73	4.92	-34.81
6	#5907.91	64.05 PK	100.79	-36.74	-36.13	4.92	-31.21
7	#5955.83	62.35 PK	88.26	-25.91	-37.83	4.92	-32.91
8	*5846.13	107.74 AV			7.56	4.92	12.48
9	#5895.06	53.33 AV	90.22	-36.89	-46.85	4.92	-41.93
10	#5931.98	51.1 AV	68.26	-17.16	-49.08	4.92	-44.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

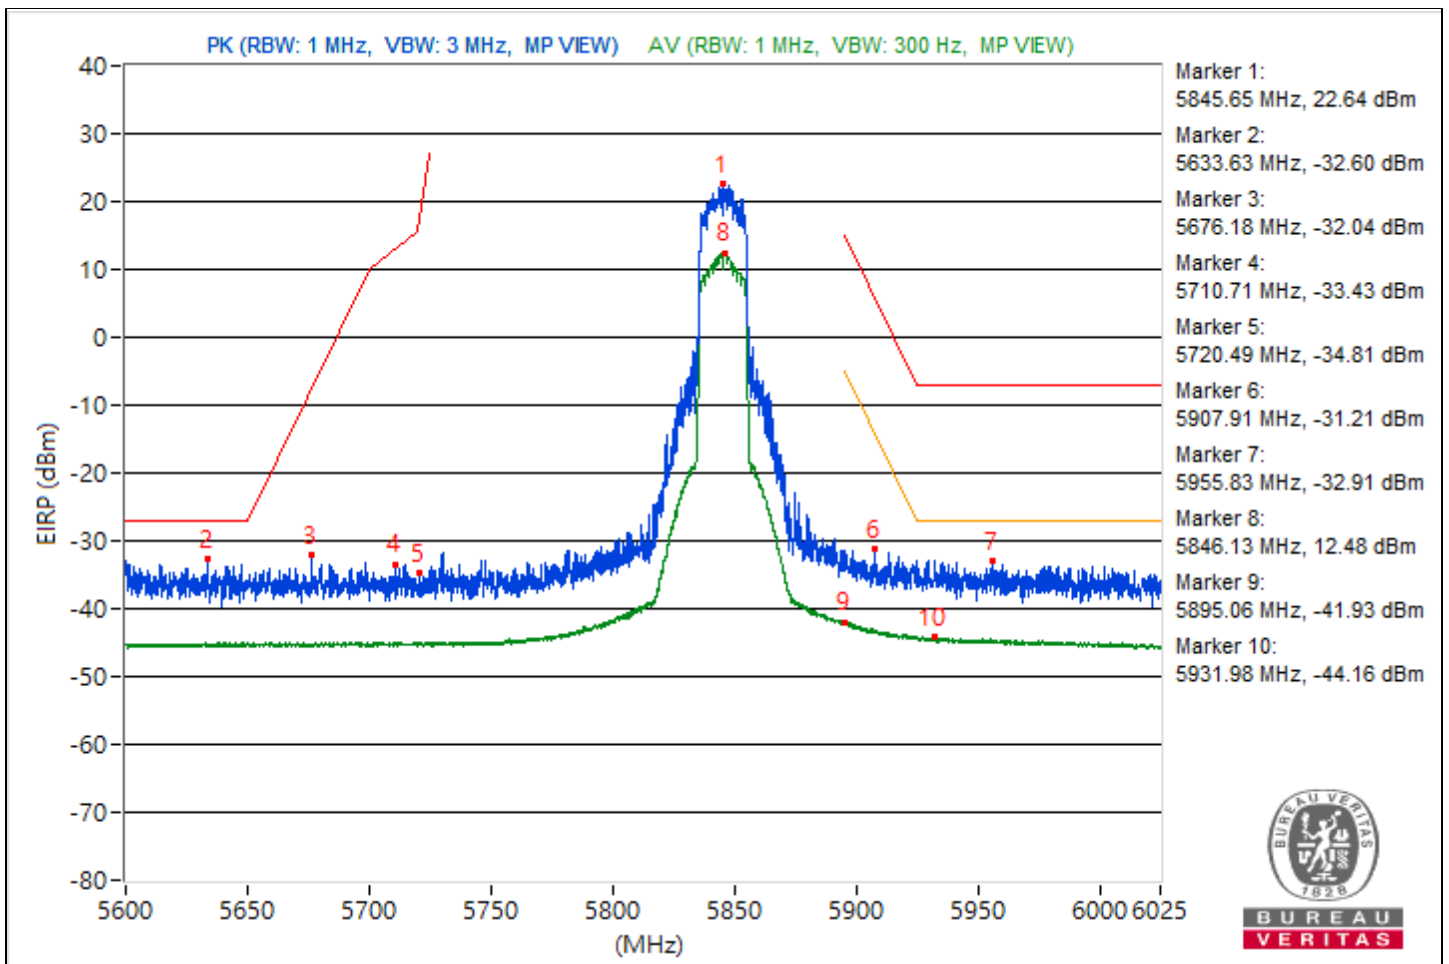




RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5868.6	118.49 PK			18.31	4.92	23.23
2	#5602.92	61.83 PK	68.26	-6.43	-38.35	4.92	-33.43
3	#5656.21	62.82 PK	72.86	-10.04	-37.36	4.92	-32.44
4	#5704.44	61.79 PK	106.5	-44.71	-38.39	4.92	-33.47
5	#5720.43	61.4 PK	111.84	-50.44	-38.78	4.92	-33.86
6	#5897.66	72.39 PK	108.31	-35.92	-27.79	4.92	-22.87
7	#5925.18	63.01 PK	88.26	-25.25	-37.17	4.92	-32.25
8	*5864.3	107.33 AV			7.15	4.92	12.07
9	#5895.59	56.66 AV	89.83	-33.17	-43.52	4.92	-38.6
10	#5925.92	52.23 AV	68.26	-16.03	-47.95	4.92	-43.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

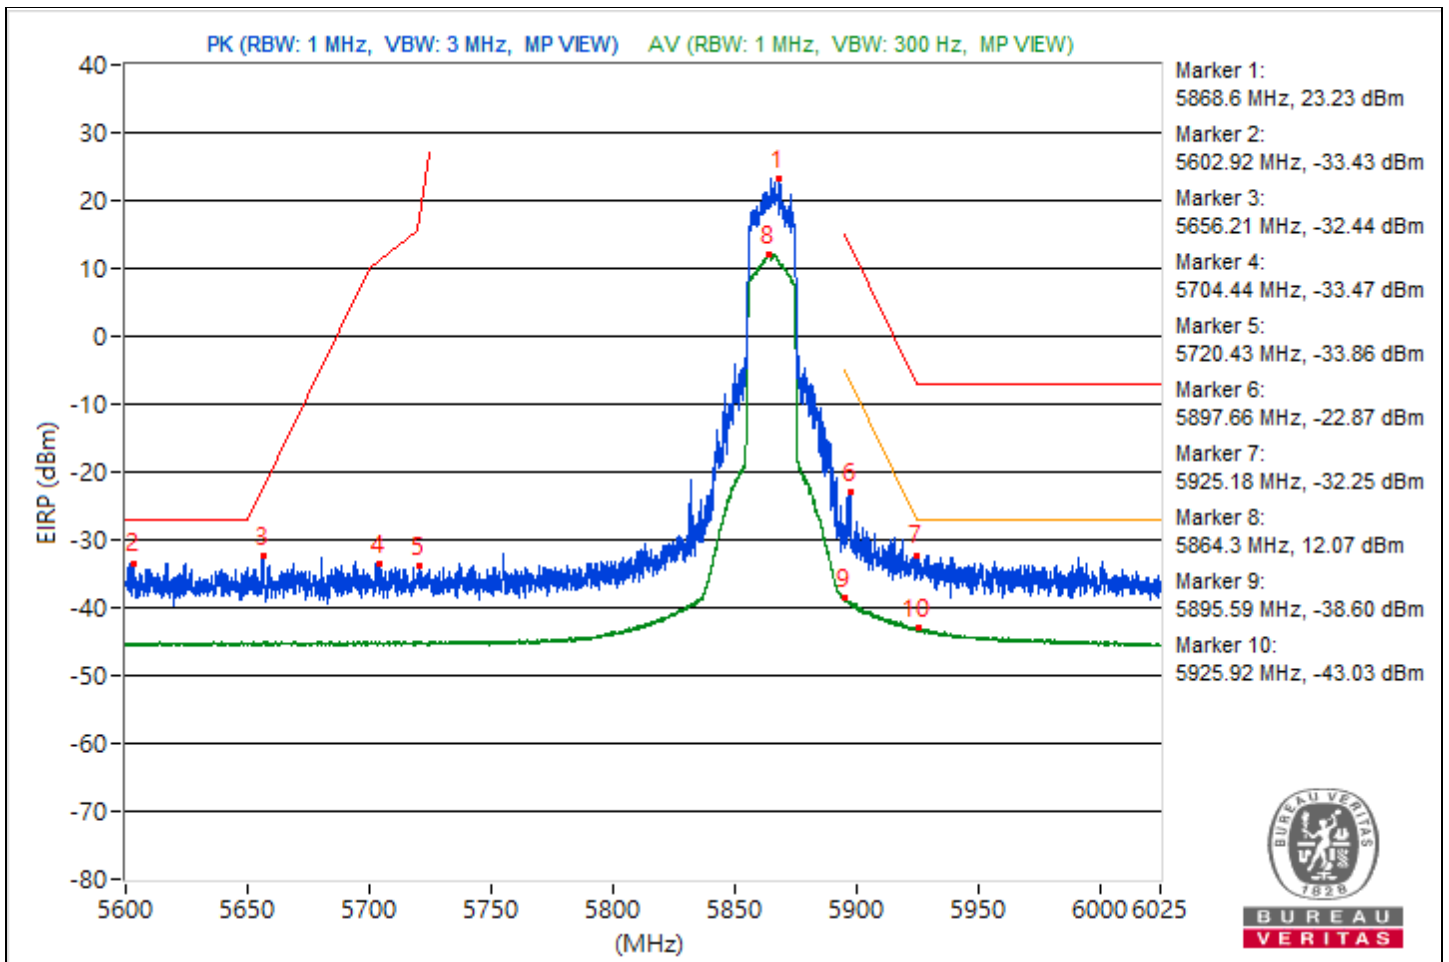


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5883.74	109.04 PK			8.86	4.92	13.78
2	#5642.13	61.9 PK	68.26	-6.36	-38.28	4.92	-33.36
3	#5677.56	61.83 PK	88.65	-26.82	-38.35	4.92	-33.43
4	#5713.63	62.82 PK	109.08	-46.26	-37.36	4.92	-32.44
5	#5723.41	62.15 PK	118.63	-56.48	-38.03	4.92	-33.11
6	#5895	98.98 PK	110.26	-11.28	-1.2	4.92	3.72
7	#5927.52	63.49 PK	88.26	-24.77	-36.69	4.92	-31.77
8	*5884.54	99.09 AV			-1.09	4.92	3.83
9	#5895	89.85 AV	90.26	-0.41	-10.33	4.92	-5.41
10	#5927.78	50.73 AV	68.26	-17.53	-49.45	4.92	-44.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

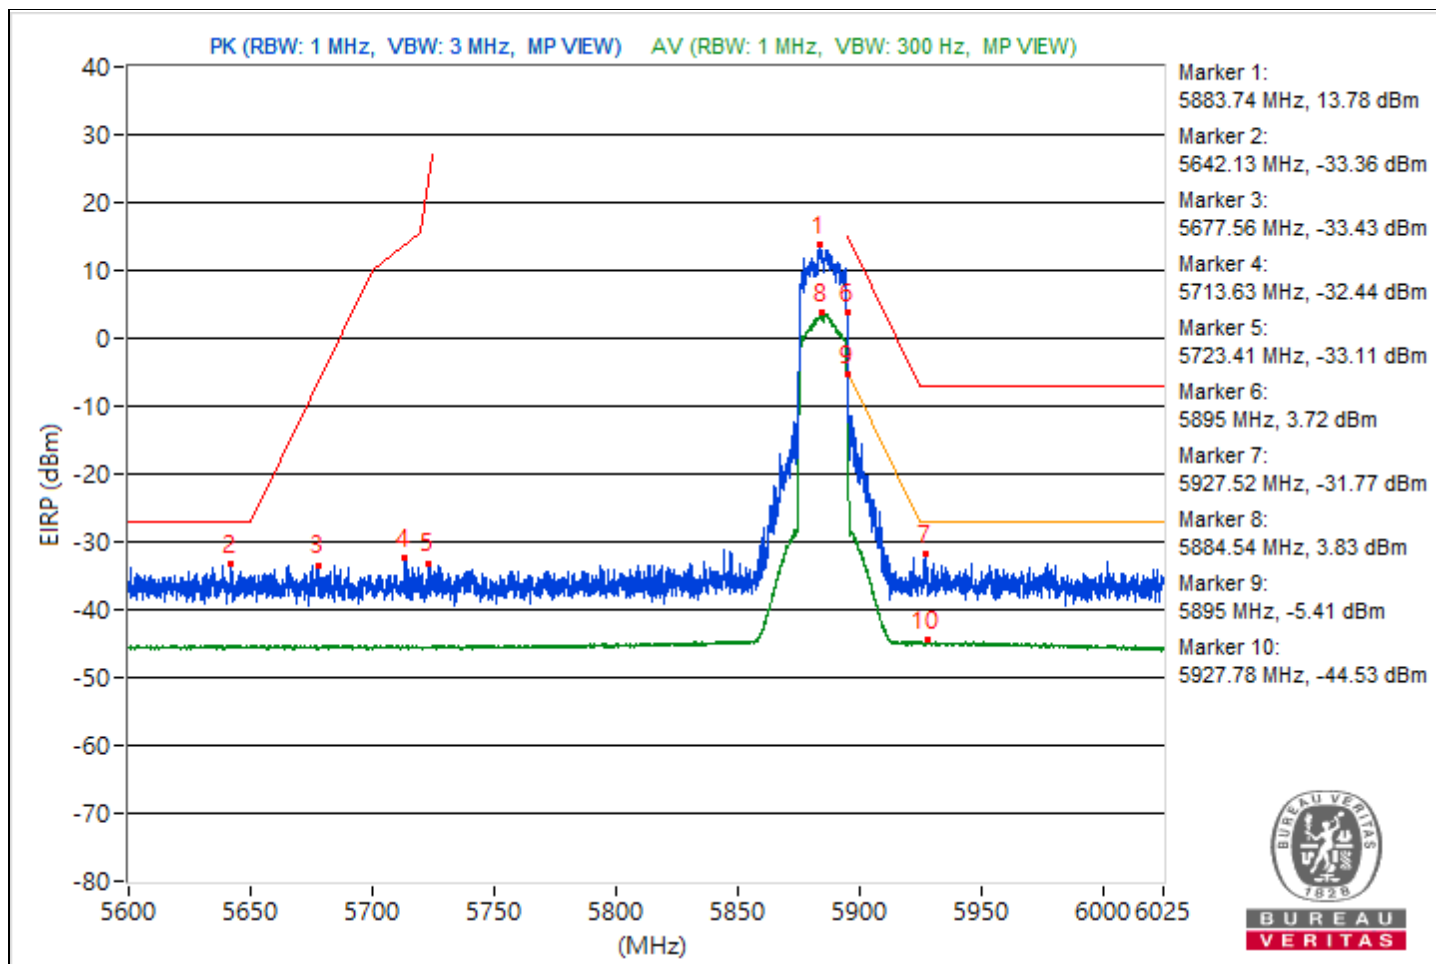


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5838.27	119.18 PK			19	4.92	23.92
2	#5617.64	62.5 PK	68.26	-5.76	-37.68	4.92	-32.76
3	#5694.24	63.79 PK	101	-37.21	-36.39	4.92	-31.47
4	#5717.67	63.96 PK	110.21	-46.25	-36.22	4.92	-31.3
5	#5722.56	64.28 PK	116.7	-52.42	-35.9	4.92	-30.98
6	#5901.91	74.32 PK	105.19	-30.87	-25.86	4.92	-20.94
7	#5932.46	69.14 PK	88.26	-19.12	-31.04	4.92	-26.12
8	*5836.35	106.82 AV			6.64	4.92	11.56
9	#5895	59.7 AV	90.26	-30.56	-40.48	4.92	-35.56
10	#5925	55.02 AV	68.26	-13.24	-45.16	4.92	-40.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

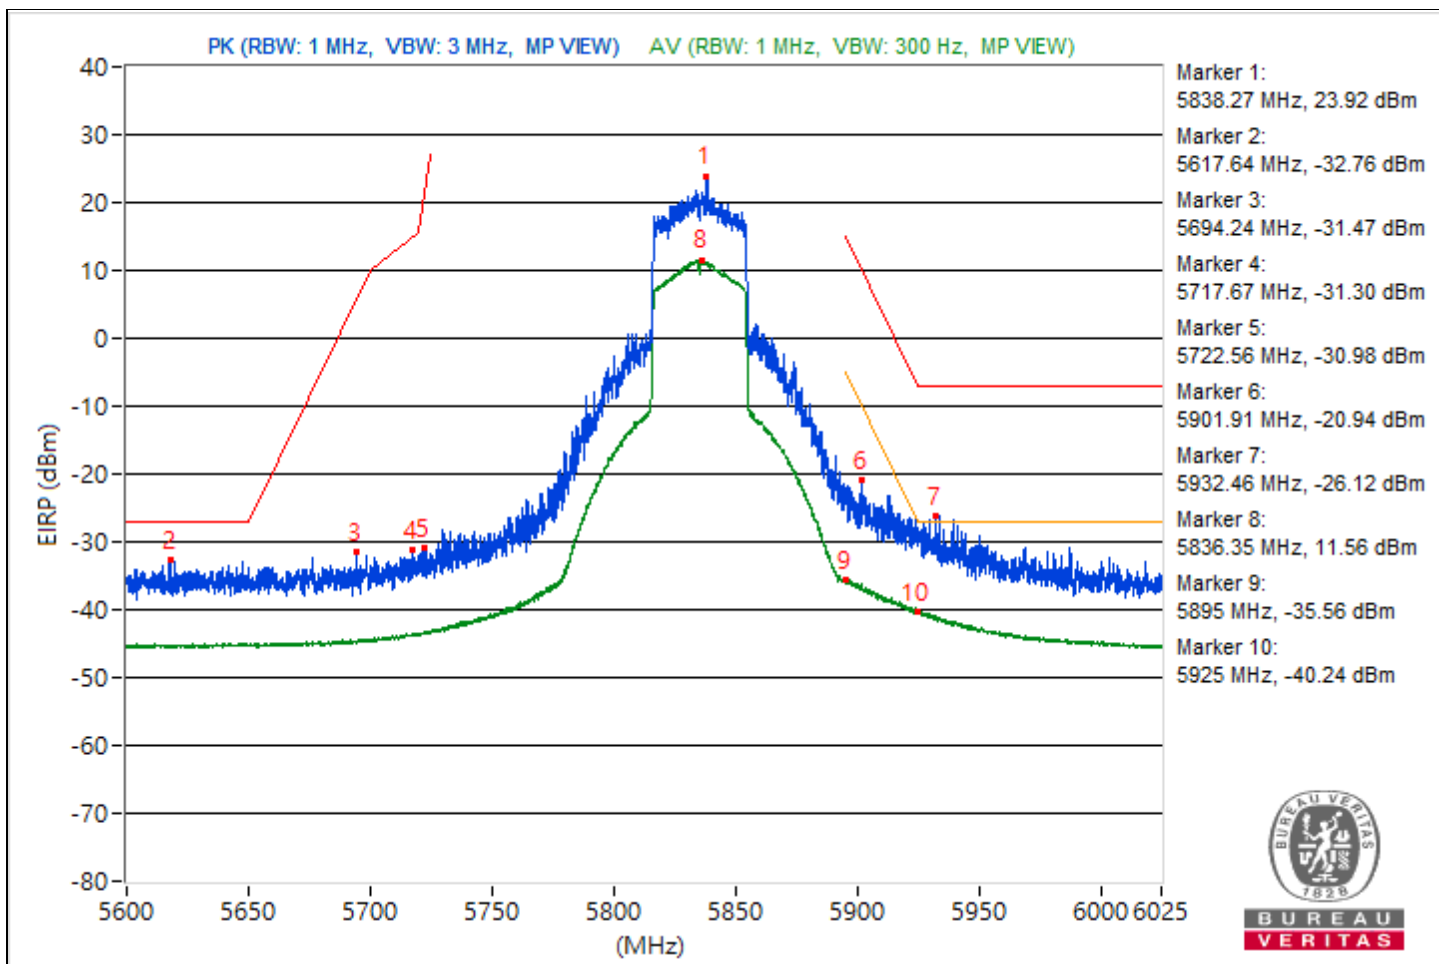




RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5885.6	117.37 PK			17.19	4.92	22.11
2	#5626.19	62.74 PK	68.26	-5.52	-37.44	4.92	-32.52
3	#5659.34	62.59 PK	75.17	-12.58	-37.59	4.92	-32.67
4	#5710.55	62.12 PK	108.21	-46.09	-38.06	4.92	-33.14
5	#5720.75	60.76 PK	112.57	-51.81	-39.42	4.92	-34.5
6	#5895	98.37 PK	110.26	-11.89	-1.81	4.92	3.11
7	#5926.67	79.86 PK	88.26	-8.4	-20.32	4.92	-15.4
8	*5874.18	106.84 AV			6.66	4.92	11.58
9	#5895	89.37 AV	90.26	-0.89	-10.81	4.92	-5.89
10	#5925.07	67.49 AV	68.26	-0.77	-32.69	4.92	-27.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

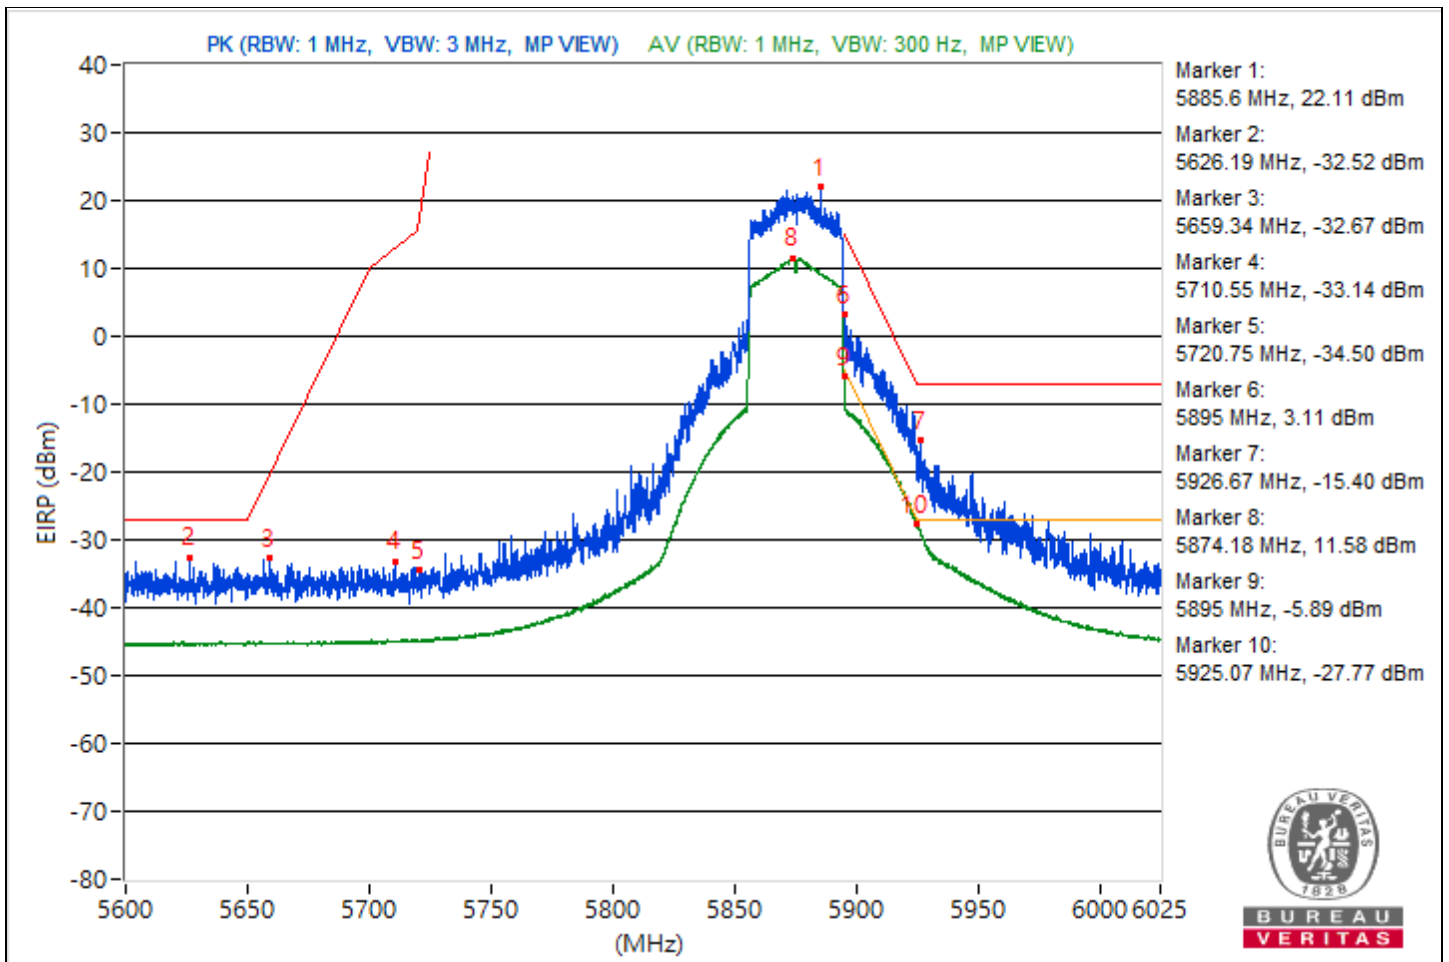


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5849.85	113.65 PK			13.47	4.92	18.39
2	#5615.41	62.97 PK	68.26	-5.29	-37.21	4.92	-32.29
3	#5698.65	62.5 PK	104.26	-41.76	-37.68	4.92	-32.76
4	#5709.92	63.9 PK	108.04	-44.14	-36.28	4.92	-31.36
5	#5725	64.27 PK	122.26	-57.99	-35.91	4.92	-30.99
6	#5895.06	92.07 PK	110.22	-18.15	-8.11	4.92	-3.19
7	#5938.99	73.91 PK	88.26	-14.35	-26.27	4.92	-21.35
8	*5857.82	102.52 AV			2.34	4.92	7.26
9	#5895	83.96 AV	90.26	-6.3	-16.22	4.92	-11.3
10	#5925.87	61.74 AV	68.26	-6.52	-38.44	4.92	-33.52

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

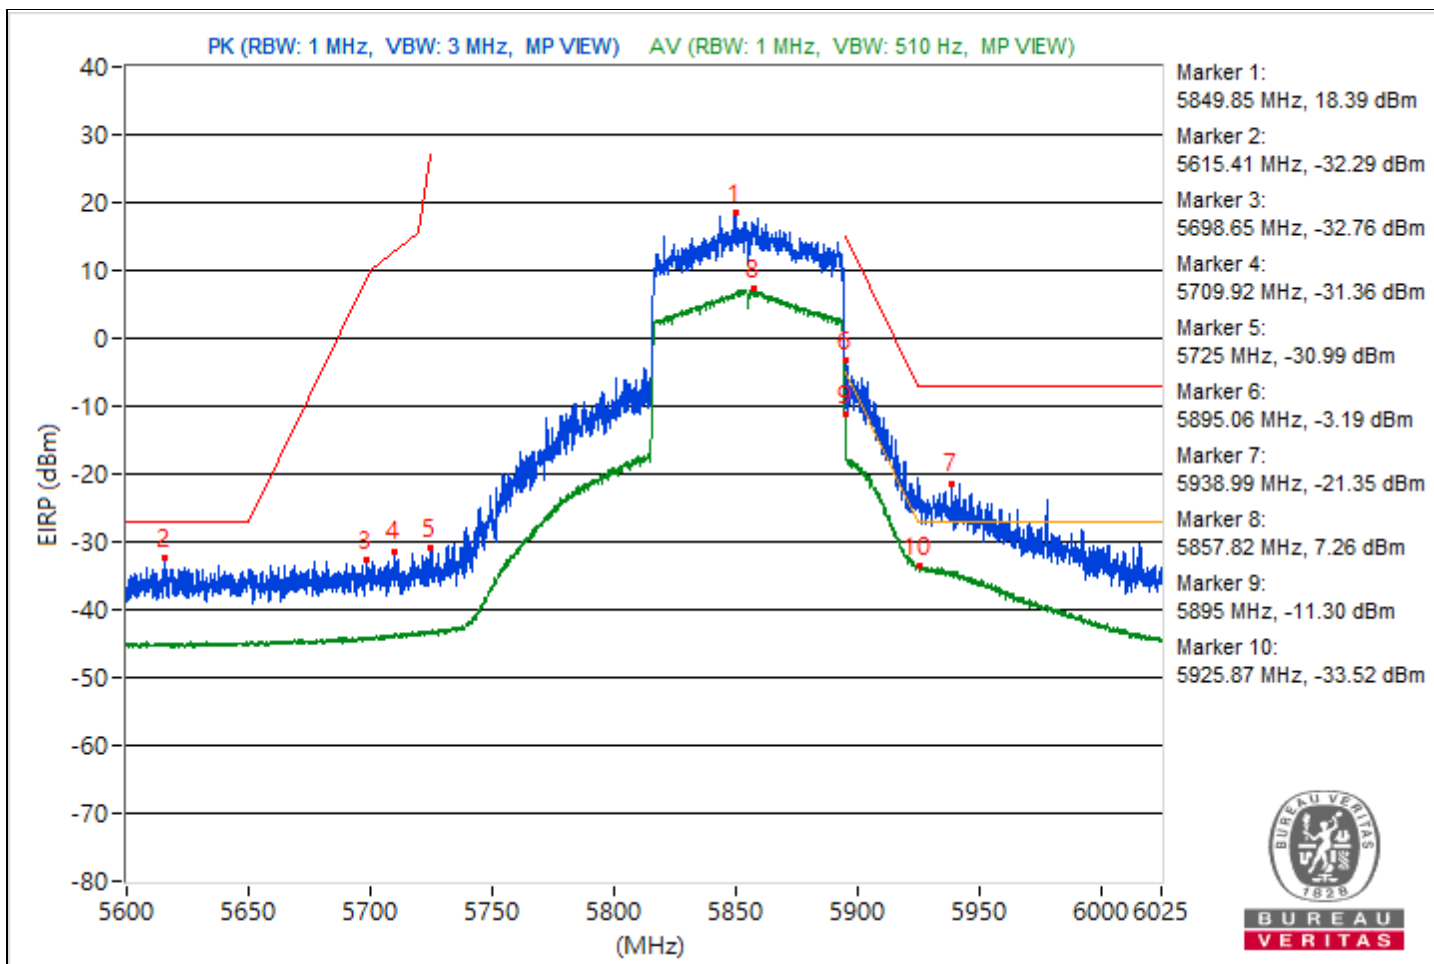




RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5814.15	107.65 PK			7.47	4.92	12.39
2	#5647.76	66.6 PK	68.26	-1.66	-33.58	4.92	-28.66
3	#5688.08	69.02 PK	96.44	-27.42	-31.16	4.92	-26.24
4	#5713.79	67.53 PK	109.12	-41.59	-32.65	4.92	-27.73
5	#5724.31	66.62 PK	120.69	-54.07	-33.56	4.92	-28.64
6	#5895	90.3 PK	110.26	-19.96	-9.88	4.92	-4.96
7	#5931.71	69.87 PK	88.26	-18.39	-30.31	4.92	-25.39
8	*5818.72	97.06 AV			-3.12	4.92	1.8
9	#5895	78.02 AV	90.26	-12.24	-22.16	4.92	-17.24
10	#5931.45	58.9 AV	68.26	-9.36	-41.28	4.92	-36.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

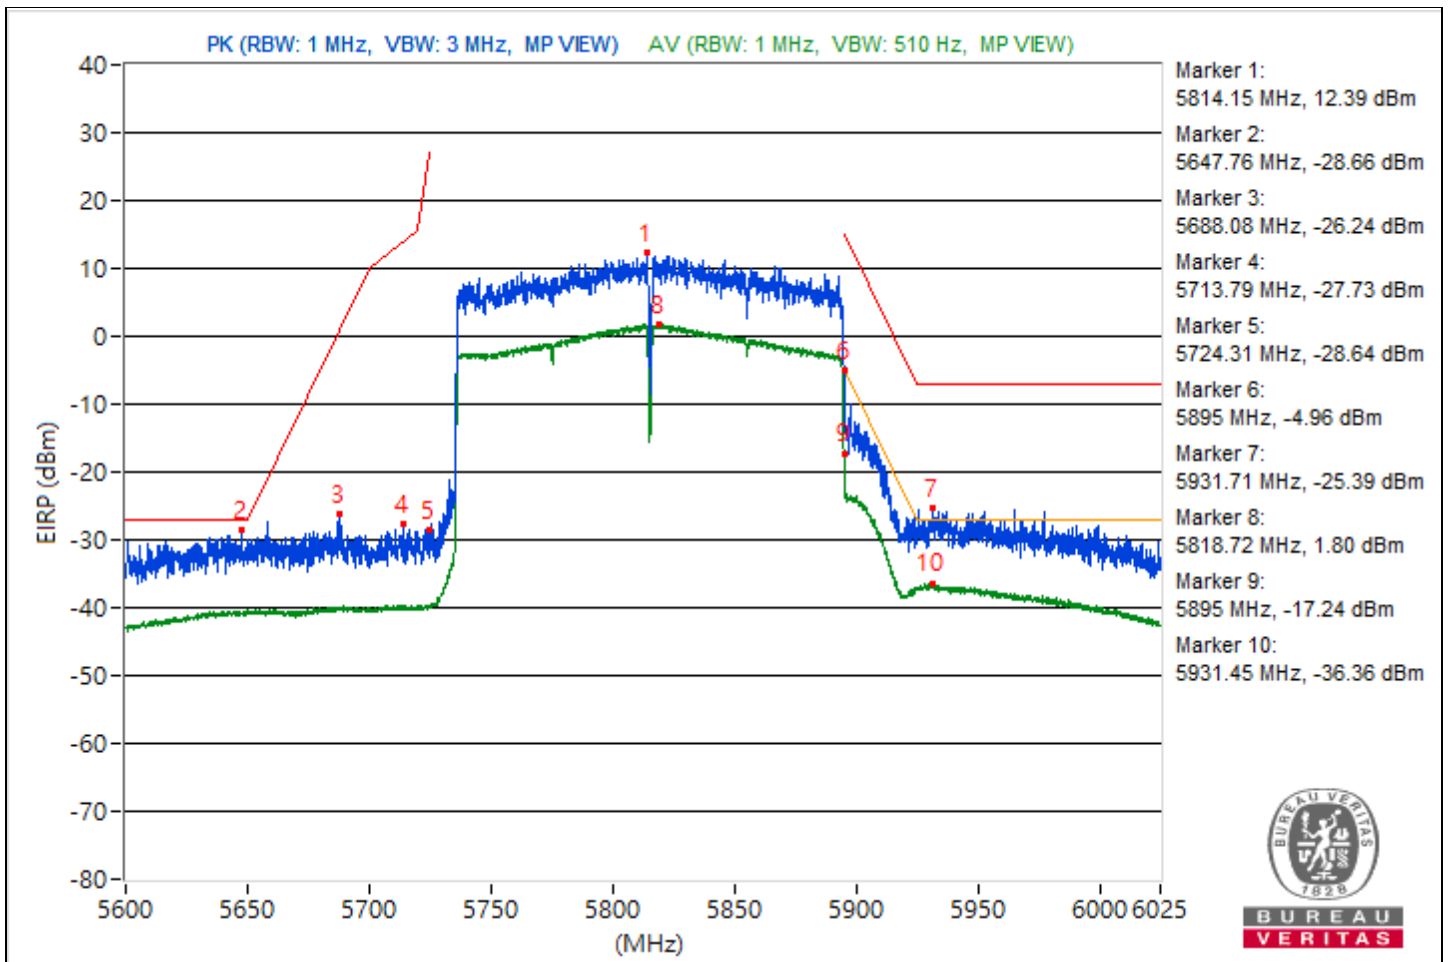




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.46	118.15 PK			17.97	4.92	22.89
2	#5623.22	63.25 PK	68.26	-5.01	-36.93	4.92	-32.01
3	#5672.62	61.81 PK	85	-23.19	-38.37	4.92	-33.45
4	#5714.8	62.85 PK	109.4	-46.55	-37.33	4.92	-32.41
5	#5721.23	62.39 PK	113.67	-51.28	-37.79	4.92	-32.87
6	#5916.57	62.54 PK	94.44	-31.9	-37.64	4.92	-32.72
7	#5986.32	63.23 PK	88.26	-25.03	-36.95	4.92	-32.03
8	*5836.67	108 AV			7.82	4.92	12.74
9	#5918.27	51.24 AV	73.19	-21.95	-48.94	4.92	-44.02
10	#5926.67	51.34 AV	68.26	-16.92	-48.84	4.92	-43.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

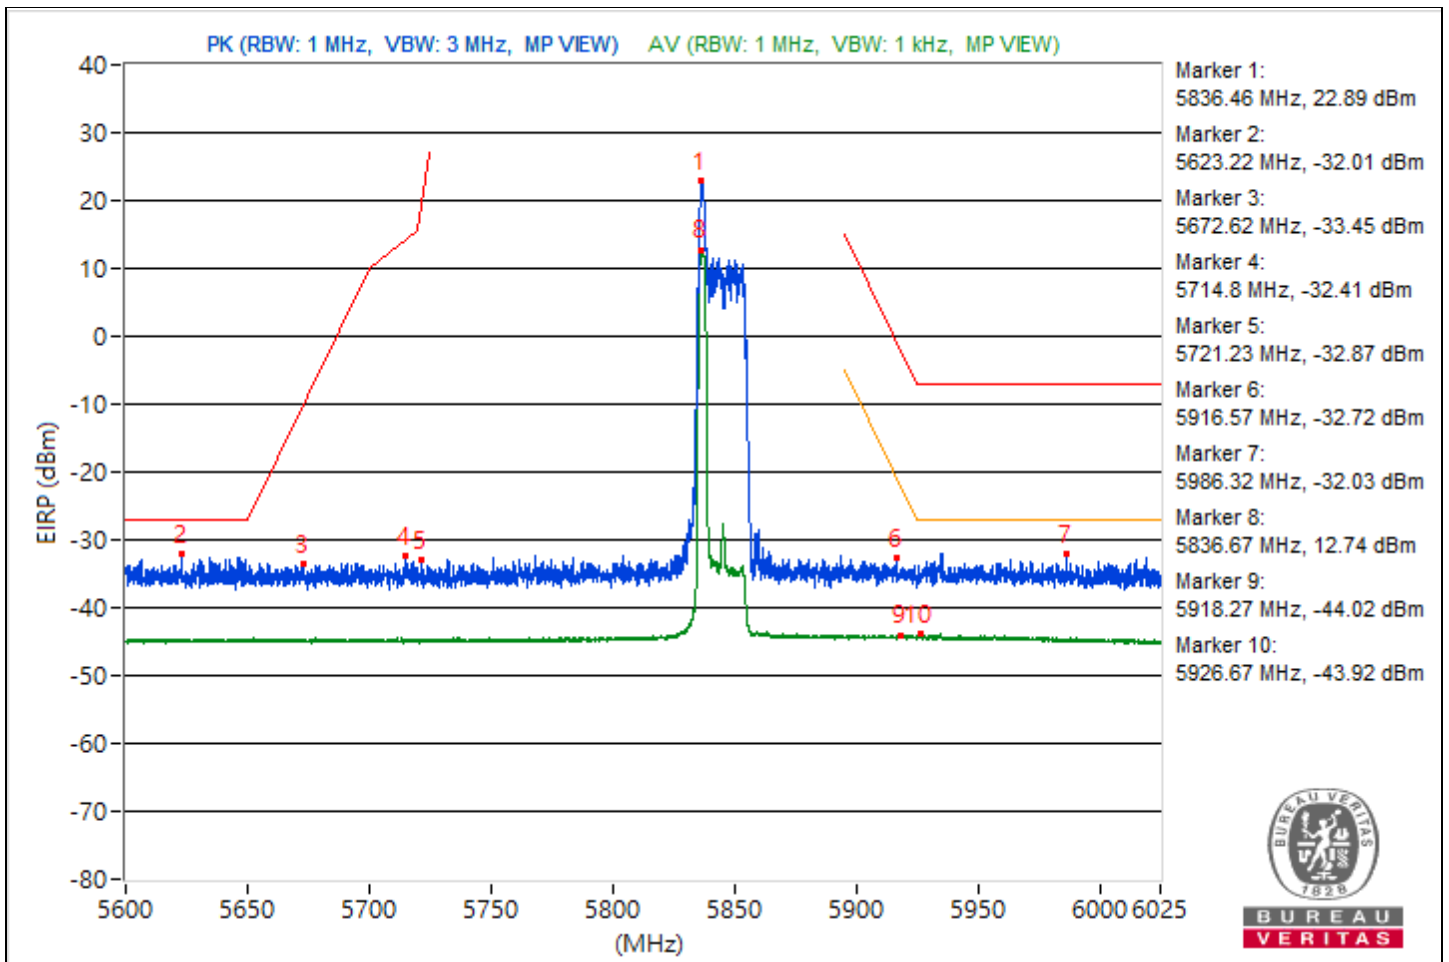




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5856.43	119.53 PK			19.35	4.92	24.27
2	#5600.11	62.58 PK	68.26	-5.68	-37.6	4.92	-32.68
3	#5658.49	62.32 PK	74.54	-12.22	-37.86	4.92	-32.94
4	#5719.37	61.87 PK	110.68	-48.81	-38.31	4.92	-33.39
5	#5724.79	62.09 PK	121.78	-59.69	-38.09	4.92	-33.17
6	#5924.06	63.08 PK	88.95	-25.87	-37.1	4.92	-32.18
7	#5977.98	63.08 PK	88.26	-25.18	-37.1	4.92	-32.18
8	*5856.86	107.97 AV			7.79	4.92	12.71
9	#5897.29	51.21 AV	88.58	-37.37	-48.97	4.92	-44.05
10	#5949.19	51.32 AV	68.26	-16.94	-48.86	4.92	-43.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

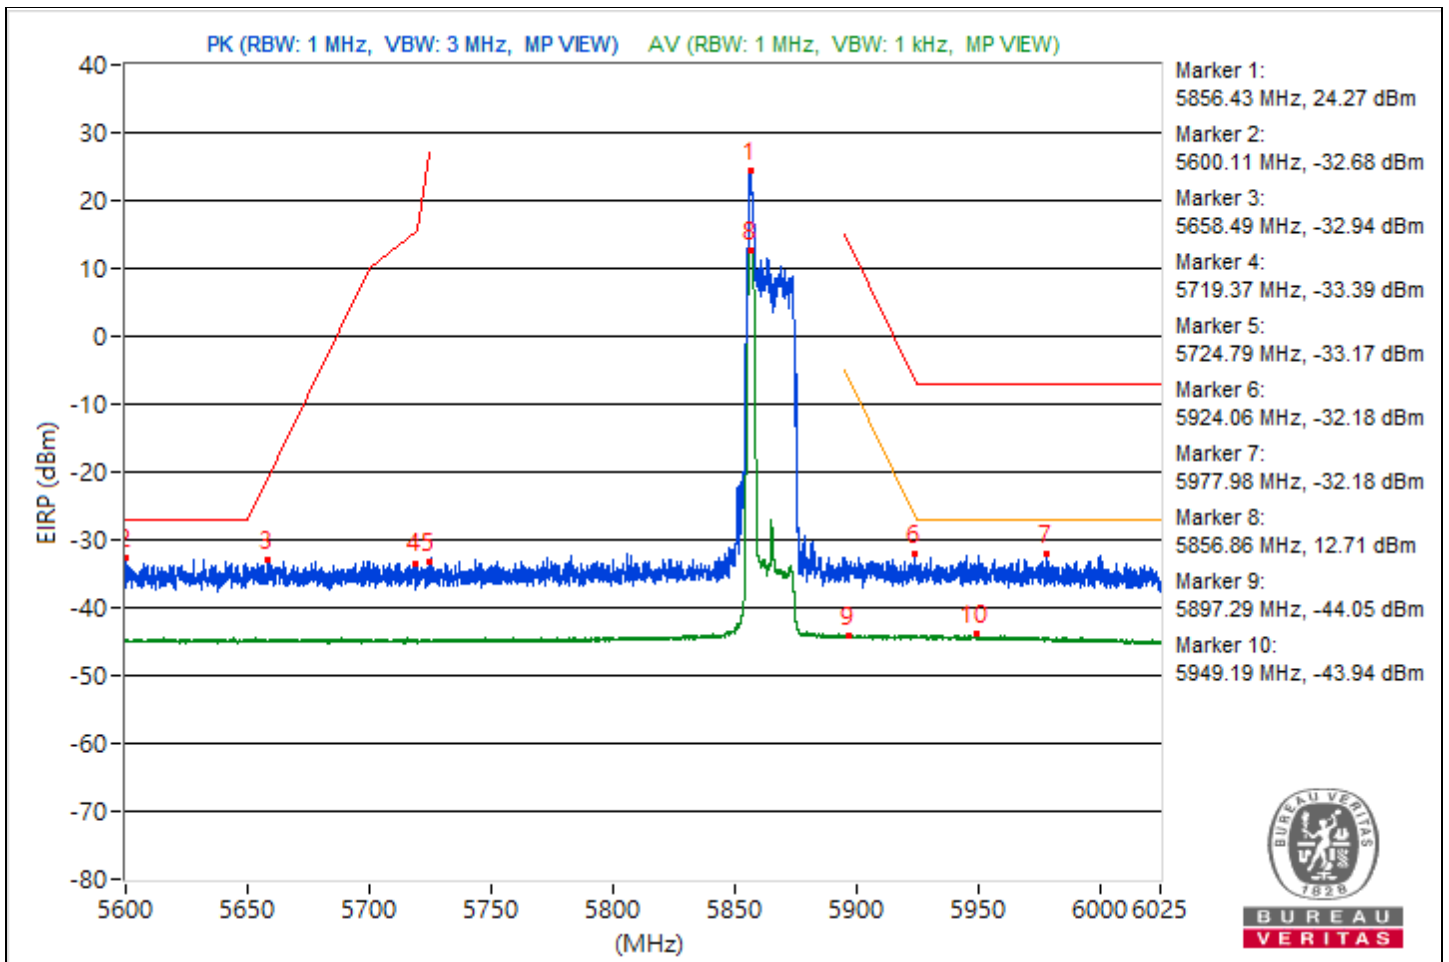




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5893.41	105.3 PK			5.12	4.92	10.04
2	#5621.73	64.58 PK	68.26	-3.68	-35.6	4.92	-30.68
3	#5665.77	62.63 PK	79.93	-17.3	-37.55	4.92	-32.63
4	#5714.48	62.24 PK	109.32	-47.08	-37.94	4.92	-33.02
5	#5720.06	61.82 PK	111	-49.18	-38.36	4.92	-33.44
6	#5895	101.27 PK	110.26	-8.99	1.09	4.92	6.01
7	#6001.78	63.92 PK	88.26	-24.34	-36.26	4.92	-31.34
8	*5894.05	95.13 AV			-5.05	4.92	-0.13
9	#5895	89.57 AV	90.26	-0.69	-10.61	4.92	-5.69
10	#5936.55	50.95 AV	68.26	-17.31	-49.23	4.92	-44.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

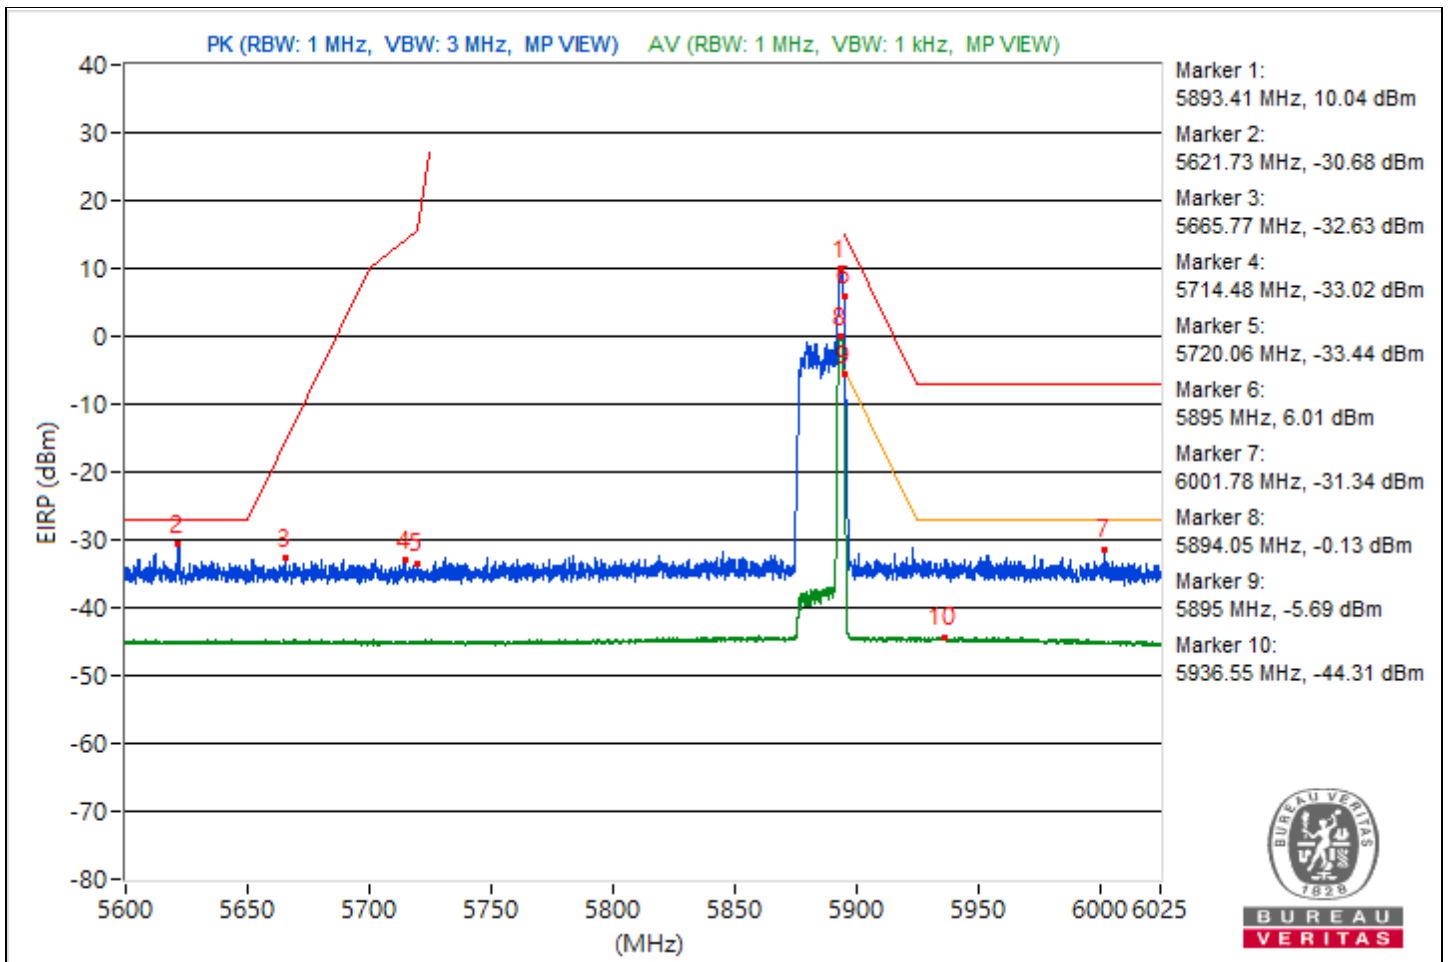


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5837.26	118.75 PK			18.57	4.92	23.49
2	#5623.8	62.61 PK	68.26	-5.65	-37.57	4.92	-32.65
3	#5677.3	62.57 PK	88.46	-25.89	-37.61	4.92	-32.69
4	#5706.78	62.55 PK	107.16	-44.61	-37.63	4.92	-32.71
5	#5724.37	62.33 PK	120.81	-58.48	-37.85	4.92	-32.93
6	#5904.09	63.09 PK	103.6	-40.51	-37.09	4.92	-32.17
7	#5988.72	62.93 PK	88.26	-25.33	-37.25	4.92	-32.33
8	*5838.8	108 AV			7.82	4.92	12.74
9	#5901.48	51.36 AV	85.5	-34.14	-48.82	4.92	-43.9
10	#5930.7	51.29 AV	68.26	-16.97	-48.89	4.92	-43.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

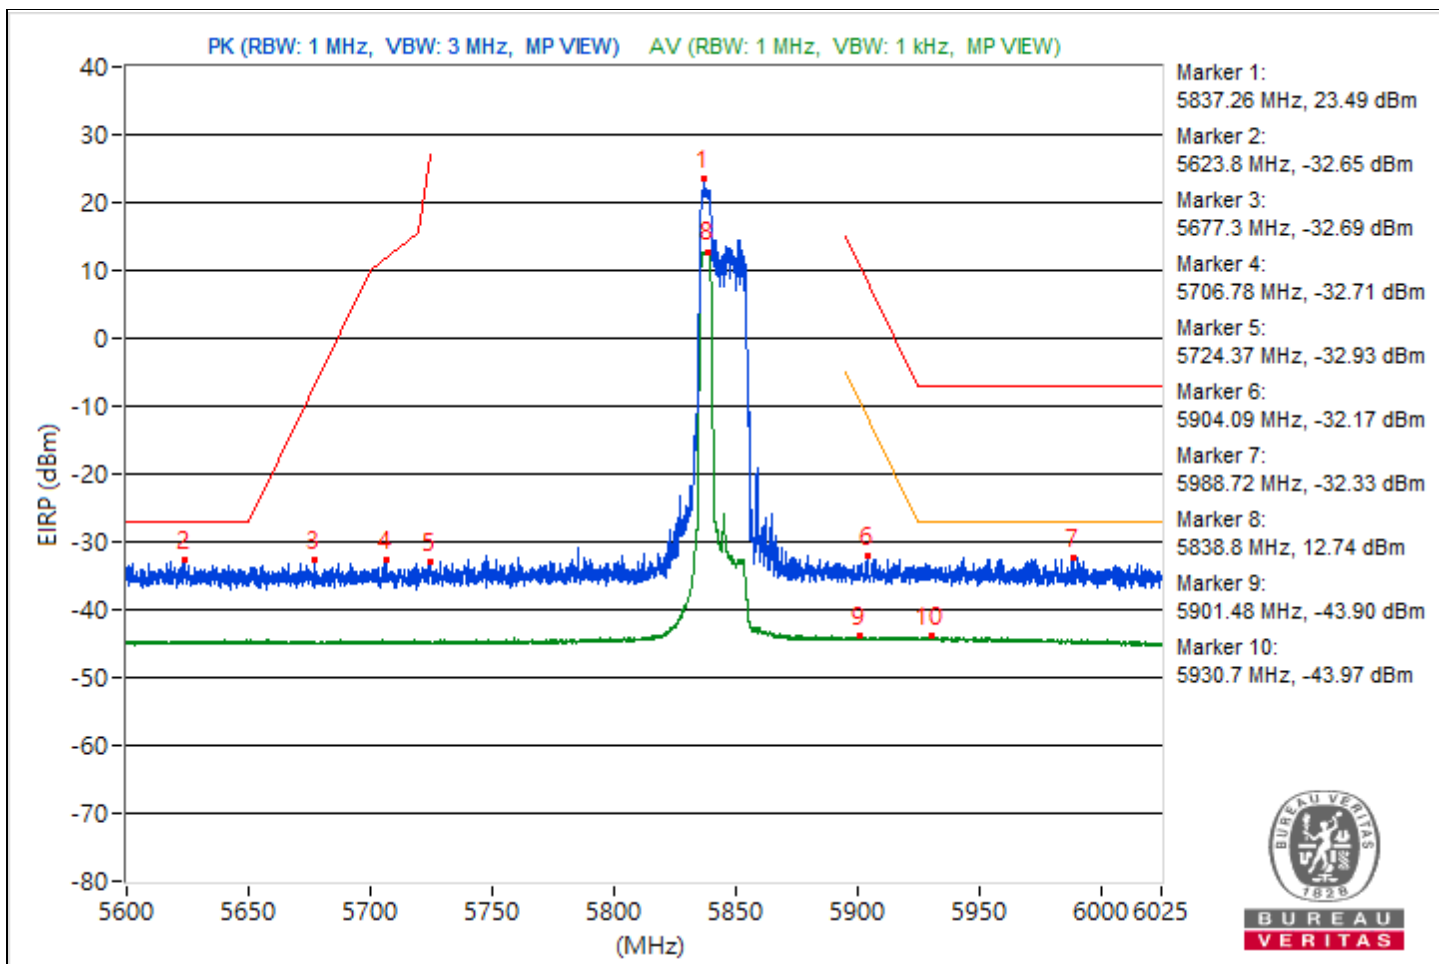




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5857.28	119.18 PK			19	4.92	23.92
2	#5631.18	63.17 PK	68.26	-5.09	-37.01	4.92	-32.09
3	#5665.5	63.03 PK	79.73	-16.7	-37.15	4.92	-32.23
4	#5700.25	62.52 PK	105.33	-42.81	-37.66	4.92	-32.74
5	#5722.93	61.57 PK	117.54	-55.97	-38.61	4.92	-33.69
6	#5922.95	64.48 PK	89.77	-25.29	-35.7	4.92	-30.78
7	#5943.03	63.28 PK	88.26	-24.98	-36.9	4.92	-31.98
8	*5857.23	107.72 AV			7.54	4.92	12.46
9	#5903.72	51.35 AV	83.87	-32.52	-48.83	4.92	-43.91
10	#5937.18	51.16 AV	68.26	-17.1	-49.02	4.92	-44.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

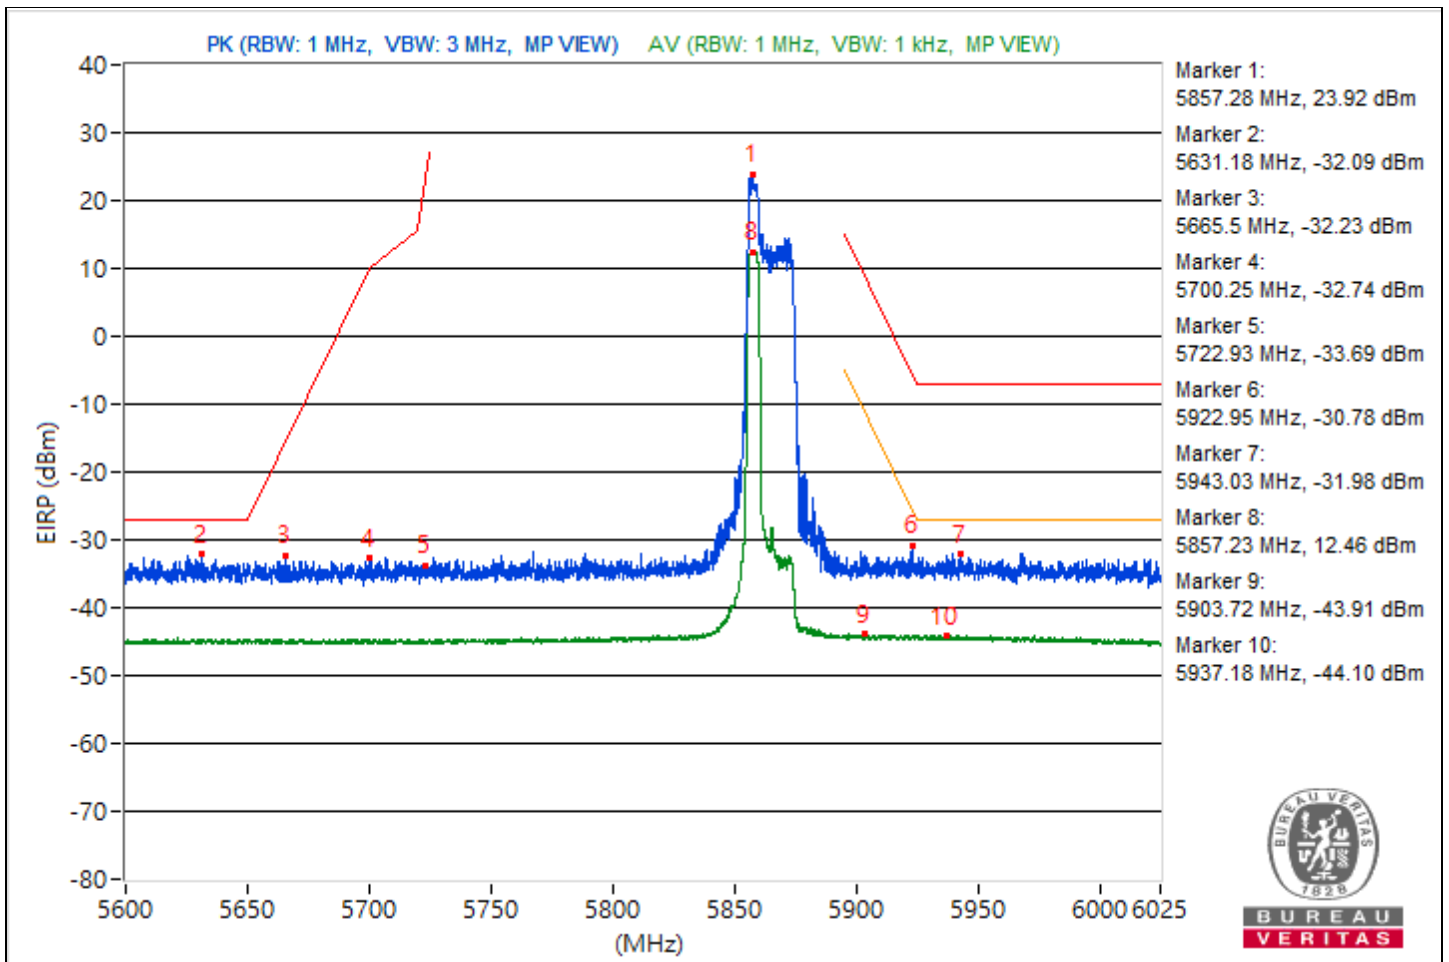




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5891.76	106.86 PK			6.68	4.92	11.6
2	#5621.41	63.12 PK	68.26	-5.14	-37.06	4.92	-32.14
3	#5675.28	62.7 PK	86.97	-24.27	-37.48	4.92	-32.56
4	#5703.86	62.81 PK	106.34	-43.53	-37.37	4.92	-32.45
5	#5720.49	62.07 PK	111.97	-49.9	-38.11	4.92	-33.19
6	#5895	100.53 PK	110.26	-9.73	0.35	4.92	5.27
7	#5968.48	63.31 PK	88.26	-24.95	-36.87	4.92	-31.95
8	*5893.94	95.6 AV			-4.58	4.92	0.34
9	#5895	90.01 AV	90.26	-0.25	-10.17	4.92	-5.25
10	#5941.17	51 AV	68.26	-17.26	-49.18	4.92	-44.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

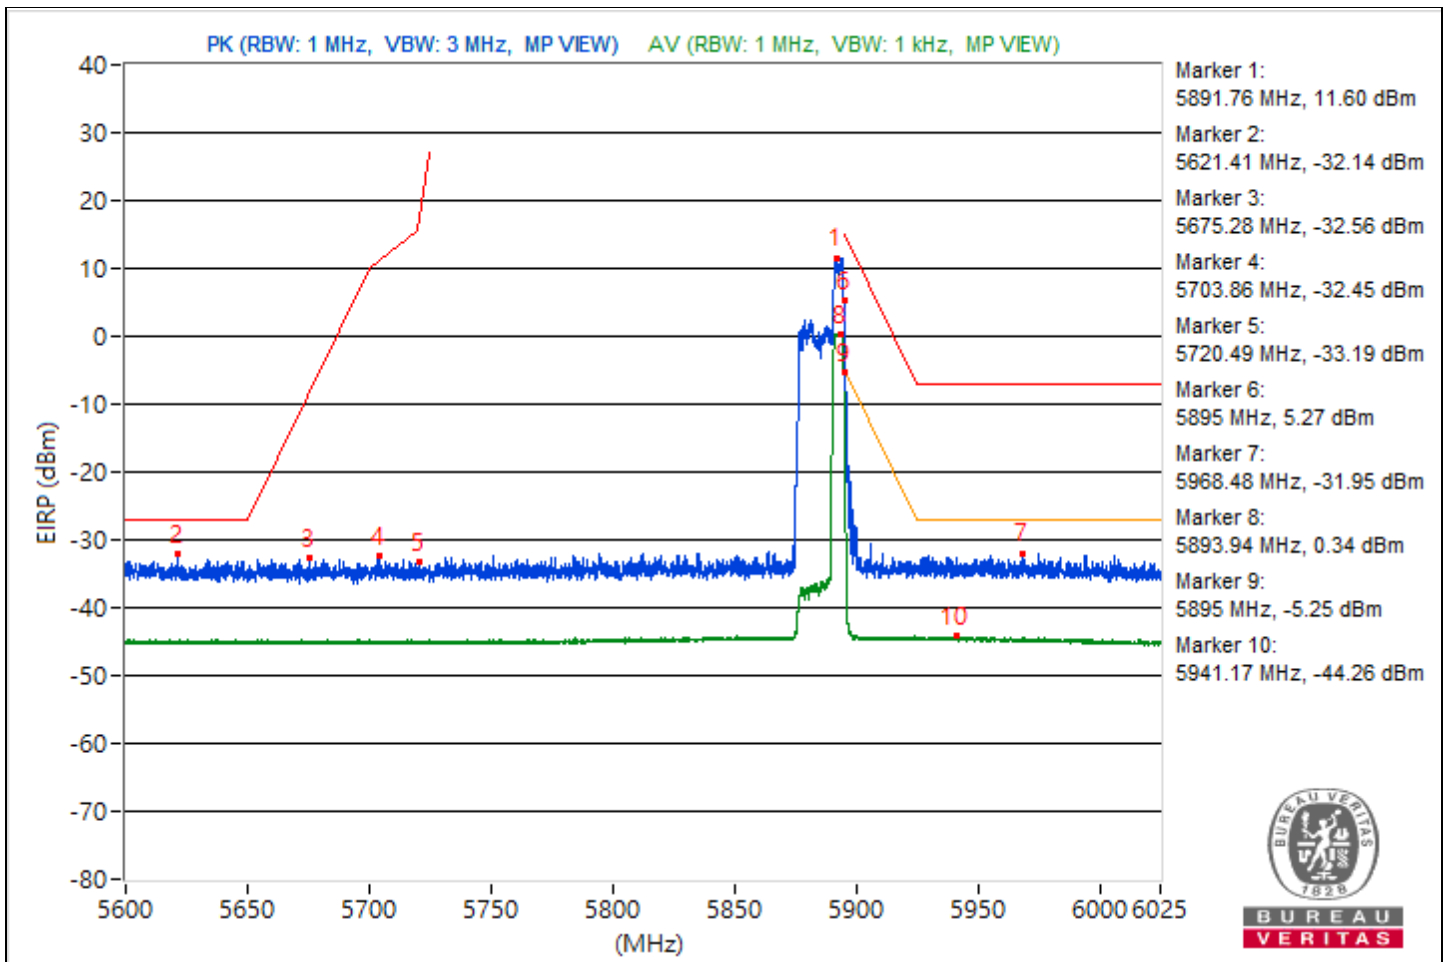




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5838.05	119.15 PK			18.97	4.92	23.89
2	#5621.14	62.71 PK	68.26	-5.55	-37.47	4.92	-32.55
3	#5690.05	62.5 PK	97.89	-35.39	-37.68	4.92	-32.76
4	#5707.42	62.56 PK	107.34	-44.78	-37.62	4.92	-32.7
5	#5723.3	61.83 PK	118.39	-56.56	-38.35	4.92	-33.43
6	#5905.2	63.47 PK	102.78	-39.31	-36.71	4.92	-31.79
7	#5972.03	63.49 PK	88.26	-24.77	-36.69	4.92	-31.77
8	*5841.77	107.91 AV			7.73	4.92	12.65
9	#5899.15	51.46 AV	87.22	-35.76	-48.72	4.92	-43.8
10	#5926.19	51.3 AV	68.26	-16.96	-48.88	4.92	-43.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

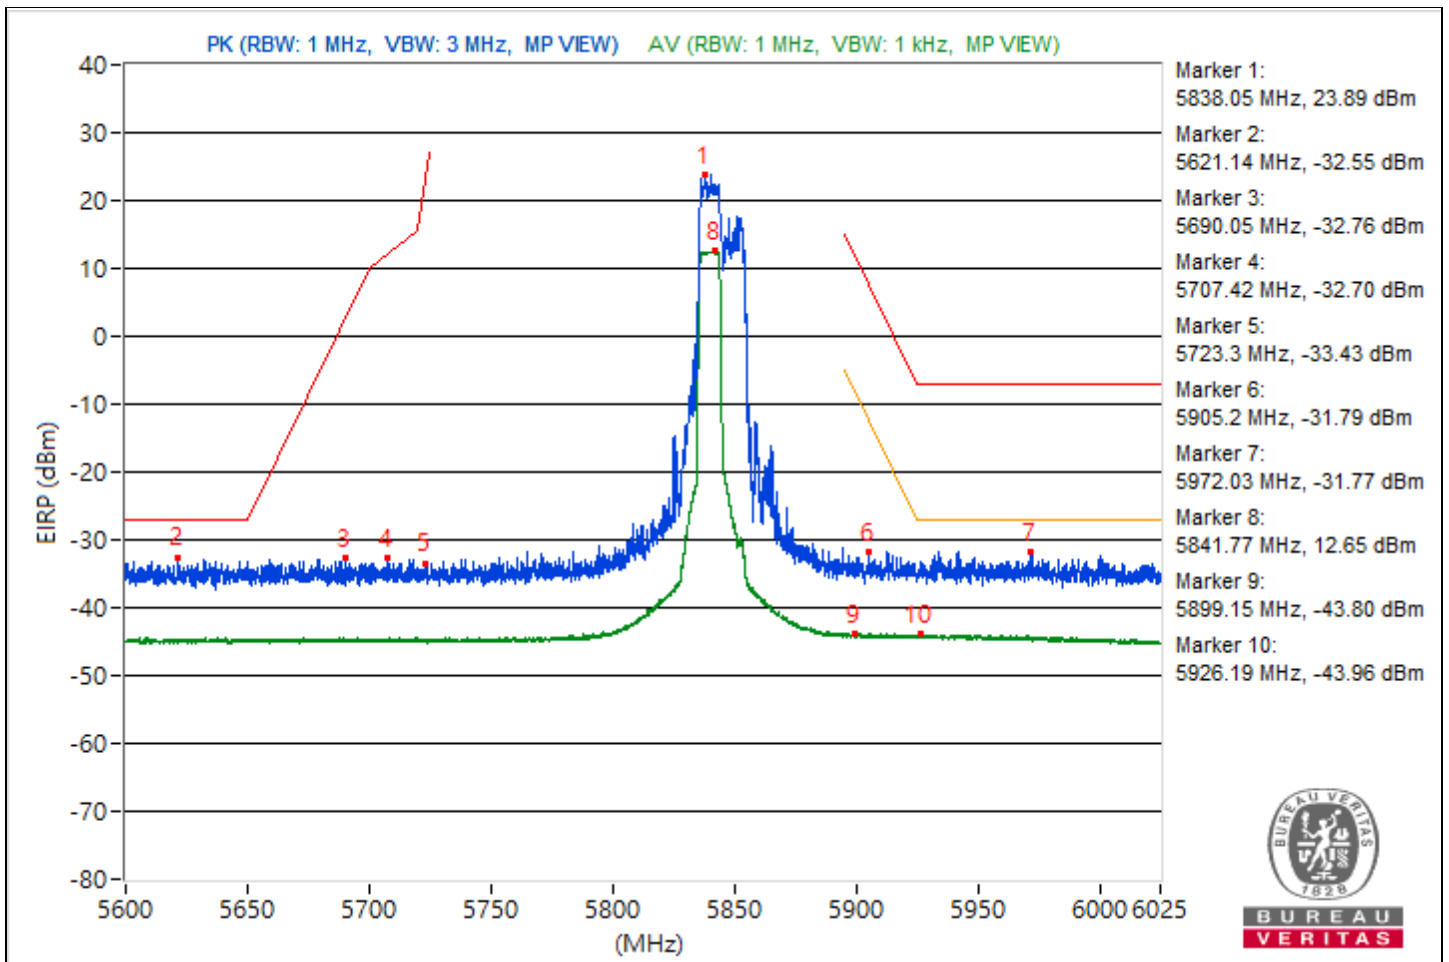




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5861.32	119.96 PK			19.78	4.92	24.7
2	#5624.33	62.55 PK	68.26	-5.71	-37.63	4.92	-32.71
3	#5677.19	62.65 PK	88.38	-25.73	-37.53	4.92	-32.61
4	#5712.25	63.11 PK	108.69	-45.58	-37.07	4.92	-32.15
5	#5722.93	62.16 PK	117.54	-55.38	-38.02	4.92	-33.1
6	#5895.43	65.45 PK	109.95	-44.5	-34.73	4.92	-29.81
7	#5948.18	63.2 PK	88.26	-25.06	-36.98	4.92	-32.06
8	*5862.12	108.16 AV			7.98	4.92	12.9
9	#5895.11	53.19 AV	90.18	-36.99	-46.99	4.92	-42.07
10	#5927.68	51.46 AV	68.26	-16.8	-48.72	4.92	-43.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

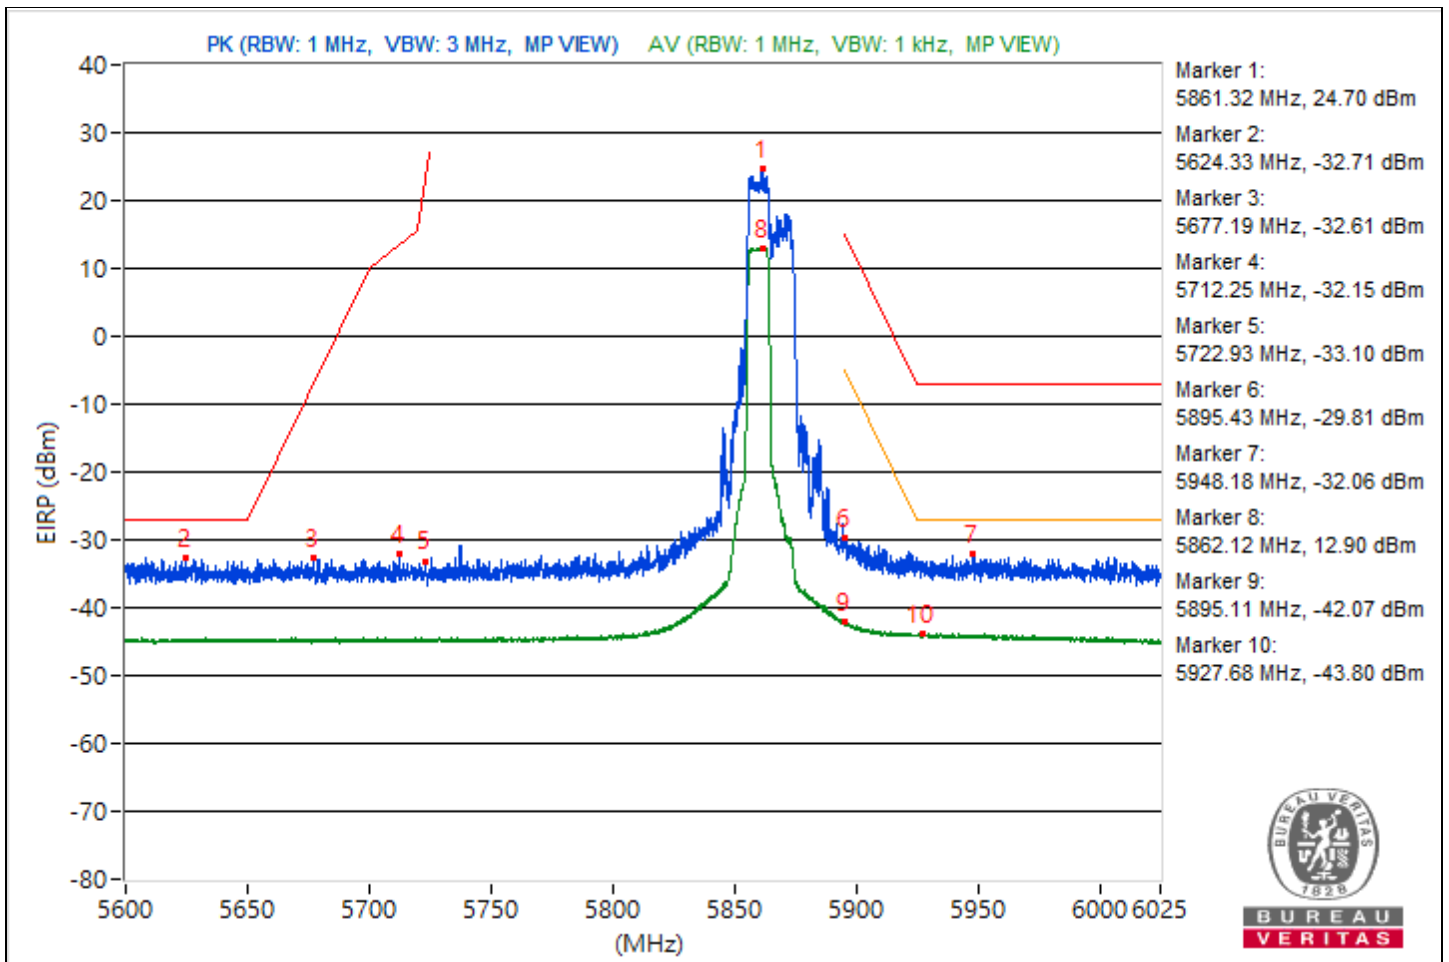




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5892.98	108.5 PK			8.32	4.92	13.24
2	#5637.98	62.6 PK	68.26	-5.66	-37.58	4.92	-32.66
3	#5685.05	62.61 PK	94.2	-31.59	-37.57	4.92	-32.65
4	#5700.03	61.55 PK	105.27	-43.72	-38.63	4.92	-33.71
5	#5720.59	61.3 PK	112.21	-50.91	-38.88	4.92	-33.96
6	#5895	100.41 PK	110.26	-9.85	0.23	4.92	5.15
7	#5935.96	63.01 PK	88.26	-25.25	-37.17	4.92	-32.25
8	*5893.2	94.83 AV			-5.35	4.92	-0.43
9	#5895	89.66 AV	90.26	-0.6	-10.52	4.92	-5.6
10	#5959.71	50.8 AV	68.26	-17.46	-49.38	4.92	-44.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

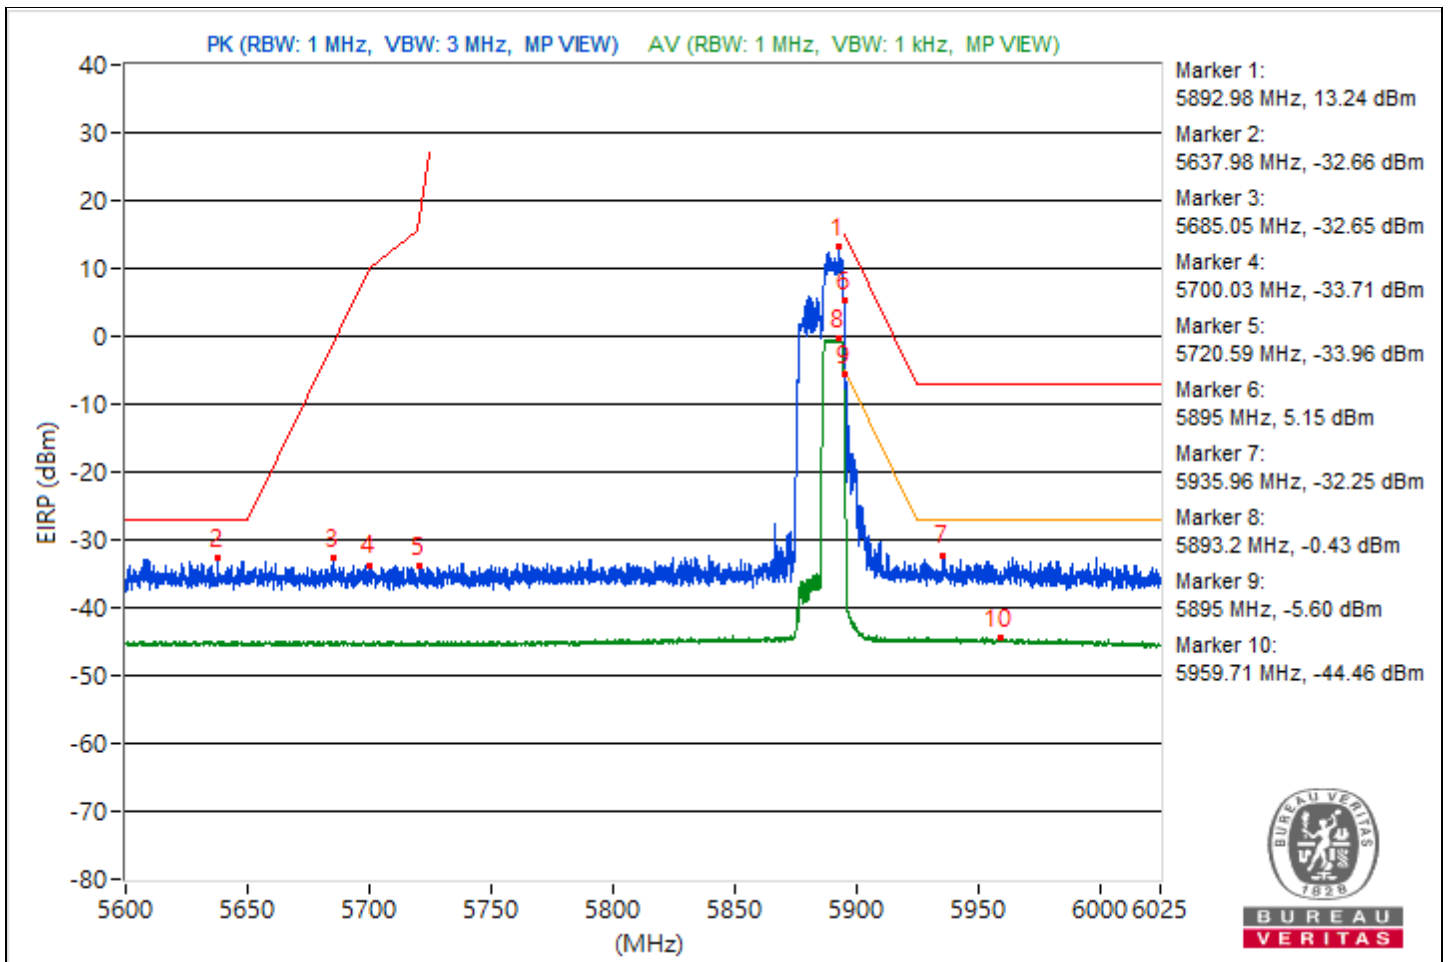


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5842.3	120.36 PK			20.18	4.92	25.1
2	#5600	62.98 PK	68.26	-5.28	-37.2	4.92	-32.28
3	#5690.42	62.78 PK	98.17	-35.39	-37.4	4.92	-32.48
4	#5708.53	62.64 PK	107.65	-45.01	-37.54	4.92	-32.62
5	#5721.87	62.2 PK	115.12	-52.92	-37.98	4.92	-33.06
6	#5896.92	64.65 PK	108.86	-44.21	-35.53	4.92	-30.61
7	#6023.73	63.33 PK	88.26	-24.93	-36.85	4.92	-31.93
8	*5839.06	107.76 AV			7.58	4.92	12.5
9	#5907.01	51.29 AV	81.45	-30.16	-48.89	4.92	-43.97
10	#5939.15	51.2 AV	68.26	-17.06	-48.98	4.92	-44.06

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

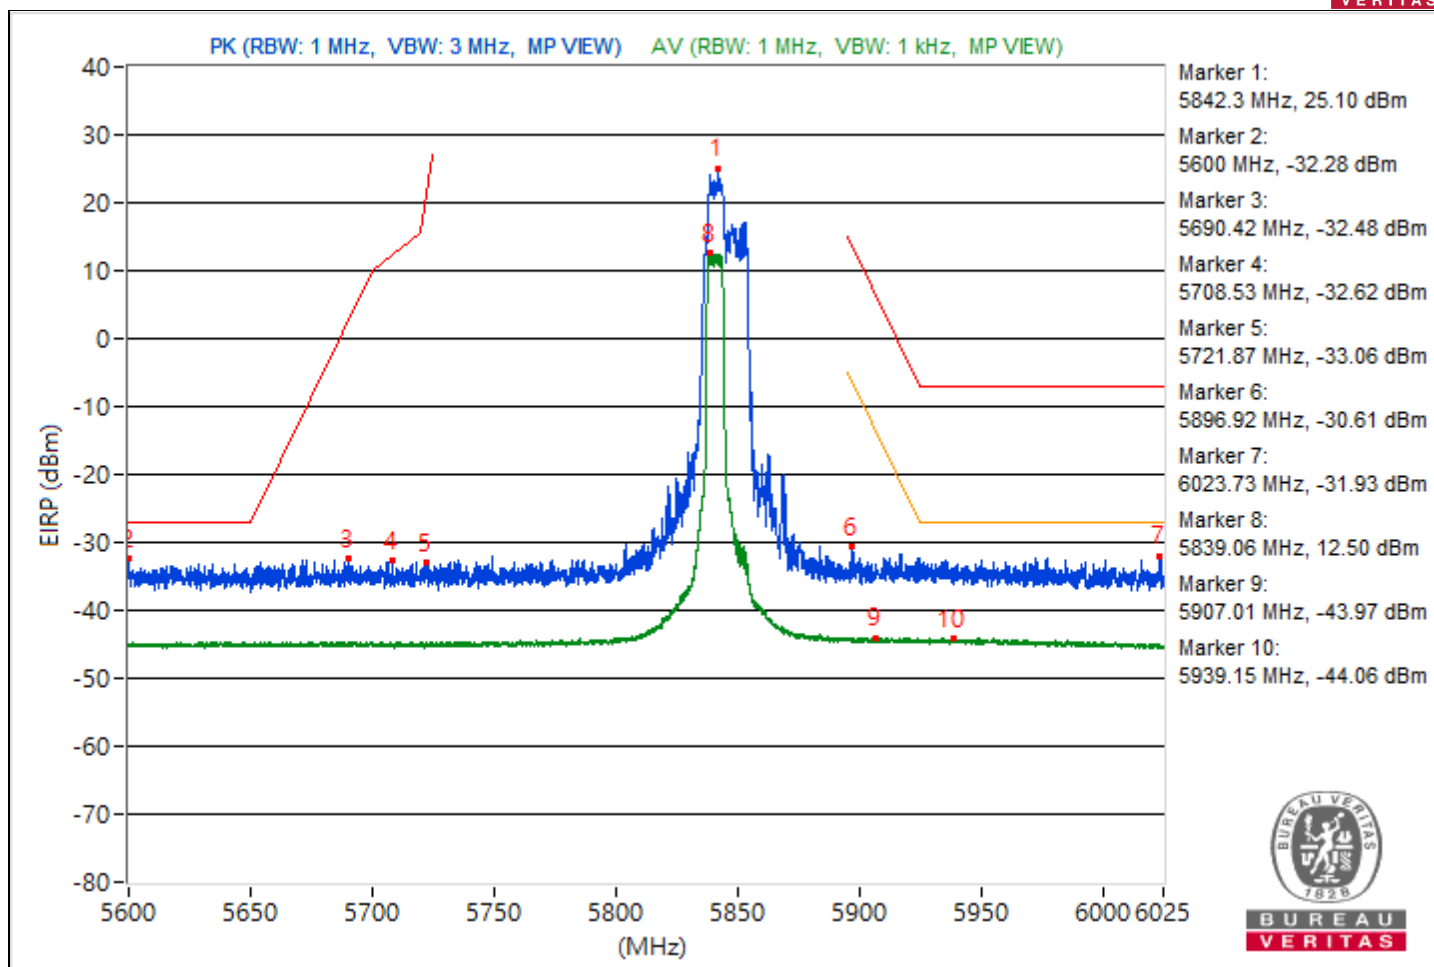


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5862.49	119.71 PK			19.53	4.92	24.45
2	#5609.72	62.41 PK	68.26	-5.85	-37.77	4.92	-32.85
3	#5659.71	62.68 PK	75.45	-12.77	-37.5	4.92	-32.58
4	#5700.62	62.28 PK	105.43	-43.15	-37.9	4.92	-32.98
5	#5720.01	61.62 PK	110.88	-49.26	-38.56	4.92	-33.64
6	#5895.16	66.13 PK	110.14	-44.01	-34.05	4.92	-29.13
7	#5968.48	63.55 PK	88.26	-24.71	-36.63	4.92	-31.71
8	*5863.29	107.62 AV			7.44	4.92	12.36
9	#5896.81	51.8 AV	88.93	-37.13	-48.38	4.92	-43.46
10	#5936.02	51.26 AV	68.26	-17	-48.92	4.92	-44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

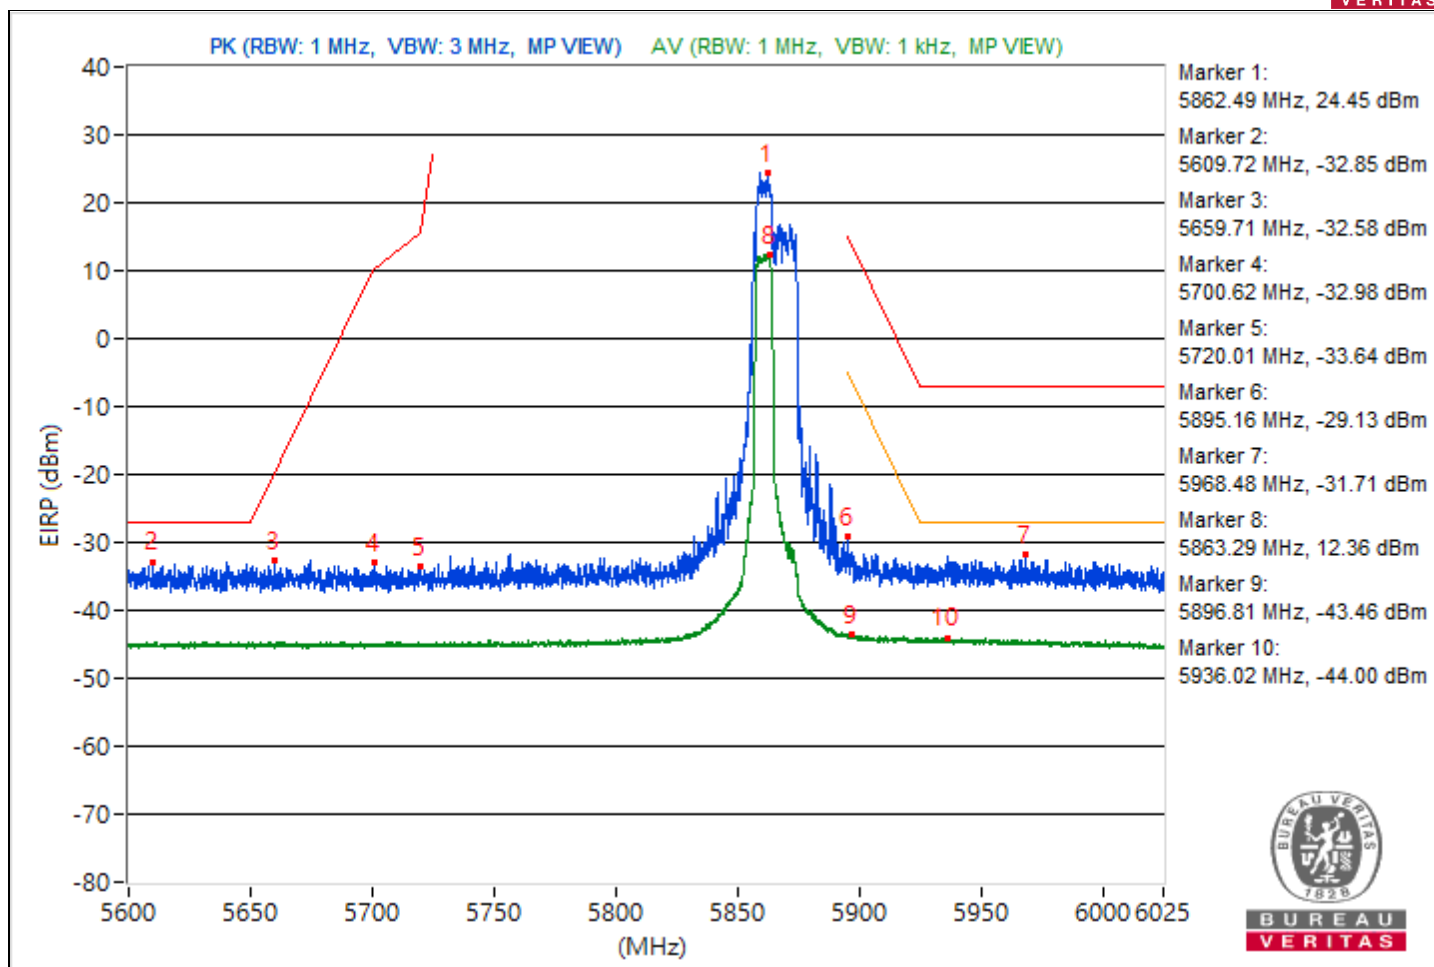


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5887.94	120.12 PK			19.94	4.92	24.86
2	#5648.72	63.1 PK	68.26	-5.16	-37.08	4.92	-32.16
3	#5667.57	62.95 PK	81.27	-18.32	-37.23	4.92	-32.31
4	#5709.97	62.27 PK	108.05	-45.78	-37.91	4.92	-32.99
5	#5721.34	61.46 PK	113.91	-52.45	-38.72	4.92	-33.8
6	#5895	95.45 PK	110.26	-14.81	-4.73	4.92	0.19
7	#5938.41	63.1 PK	88.26	-25.16	-37.08	4.92	-32.16
8	*5891.55	108.09 AV			7.91	4.92	12.83
9	#5895.06	63.7 AV	90.22	-26.52	-36.48	4.92	-31.56
10	#5925.12	51.3 AV	68.26	-16.96	-48.88	4.92	-43.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

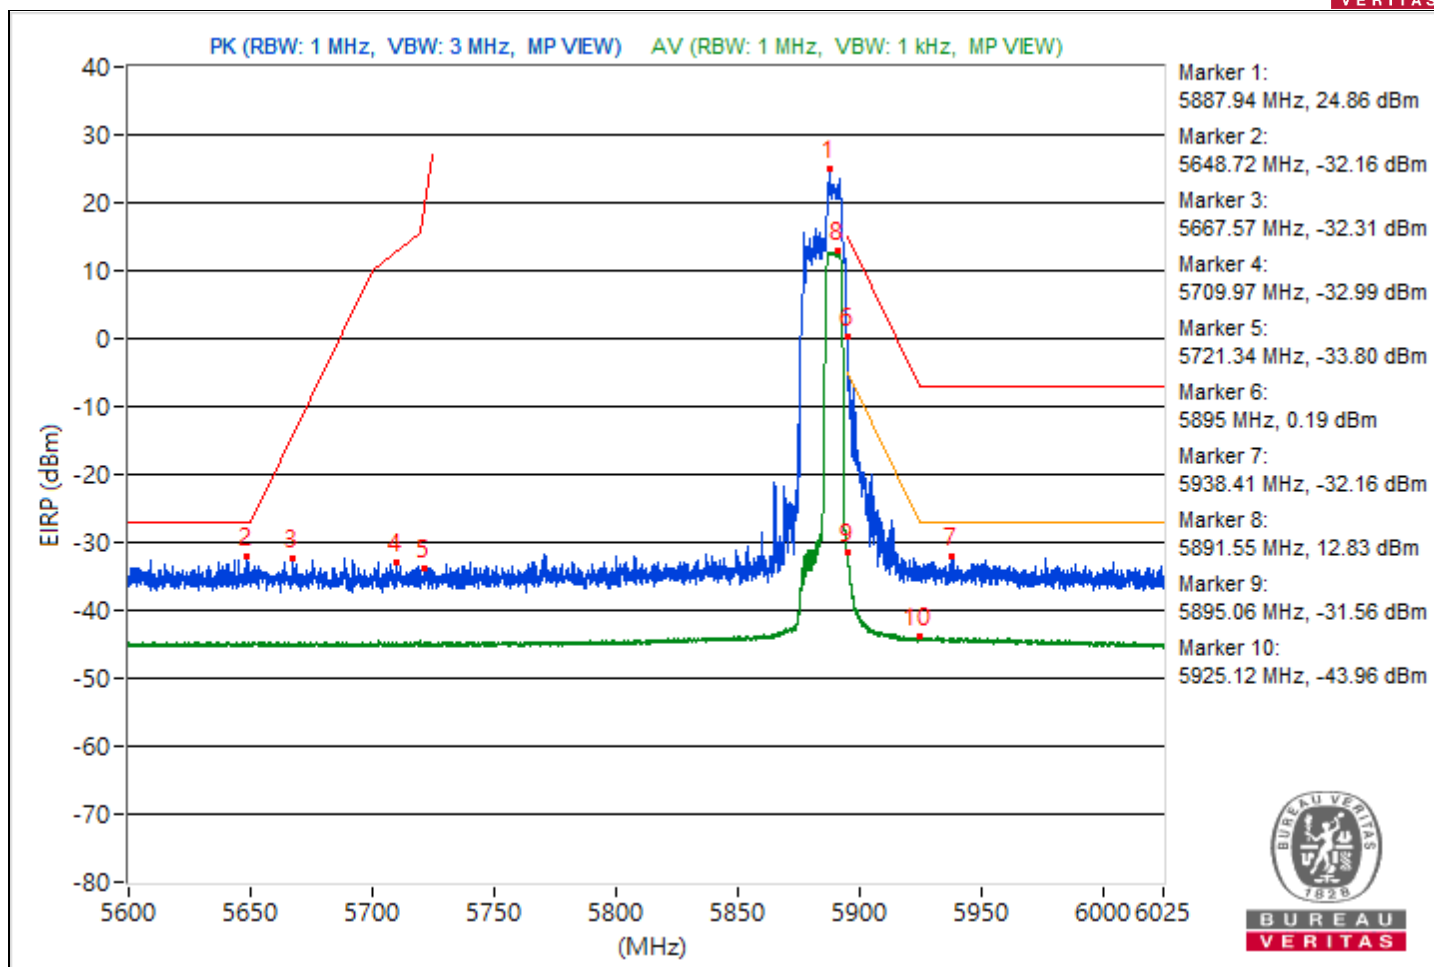


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5840.98	117.85 PK			17.67	4.92	22.59
2	#5644.41	63.12 PK	68.26	-5.14	-37.06	4.92	-32.14
3	#5674.06	63.13 PK	86.06	-22.93	-37.05	4.92	-32.13
4	#5720	63 PK	110.86	-47.86	-37.18	4.92	-32.26
5	#5720.01	63.03 PK	110.88	-47.85	-37.15	4.92	-32.23
6	#5910.99	63.21 PK	98.53	-35.32	-36.97	4.92	-32.05
7	#5942.02	62.8 PK	88.26	-25.46	-37.38	4.92	-32.46
8	*5843.79	107.61 AV			7.43	4.92	12.35
9	#5899.73	51.55 AV	86.79	-35.24	-48.63	4.92	-43.71
10	#5948.29	51.18 AV	68.26	-17.08	-49	4.92	-44.08

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

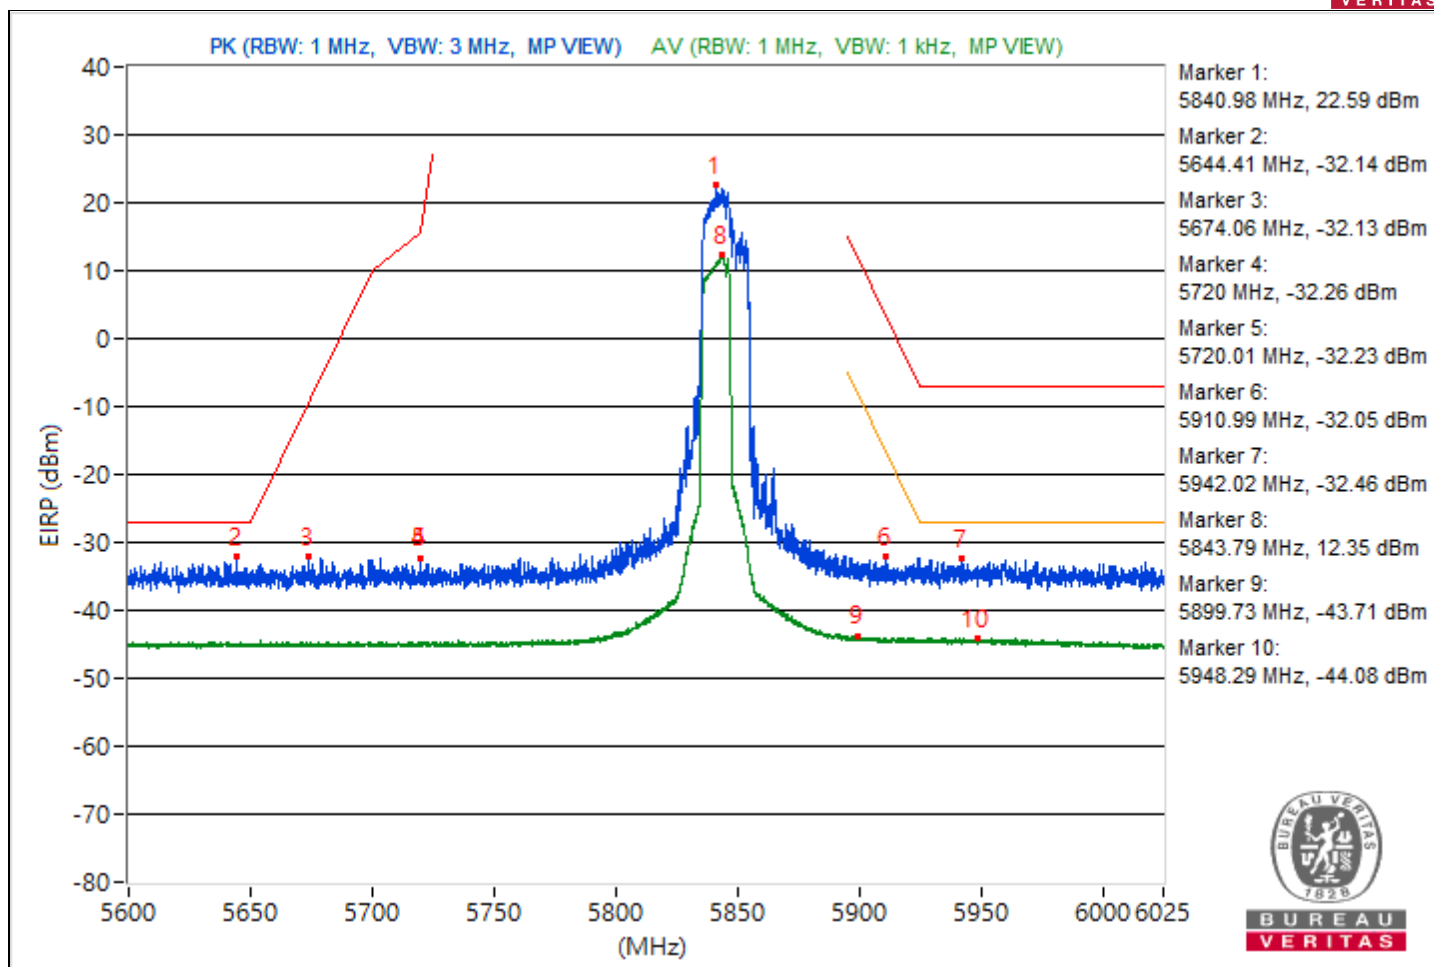


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5864.19	118.93 PK			18.75	4.92	23.67
2	#5605.26	62.81 PK	68.26	-5.45	-37.37	4.92	-32.45
3	#5688.56	62.83 PK	96.79	-33.96	-37.35	4.92	-32.43
4	#5707.52	62.88 PK	107.37	-44.49	-37.3	4.92	-32.38
5	#5724.84	61.77 PK	121.9	-60.13	-38.41	4.92	-33.49
6	#5903.61	65.63 PK	103.95	-38.32	-34.55	4.92	-29.63
7	#5942.34	63.81 PK	88.26	-24.45	-36.37	4.92	-31.45
8	*5864.35	107.61 AV			7.43	4.92	12.35
9	#5895.37	53.39 AV	89.98	-36.59	-46.79	4.92	-41.87
10	#5927.94	51.22 AV	68.26	-17.04	-48.96	4.92	-44.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

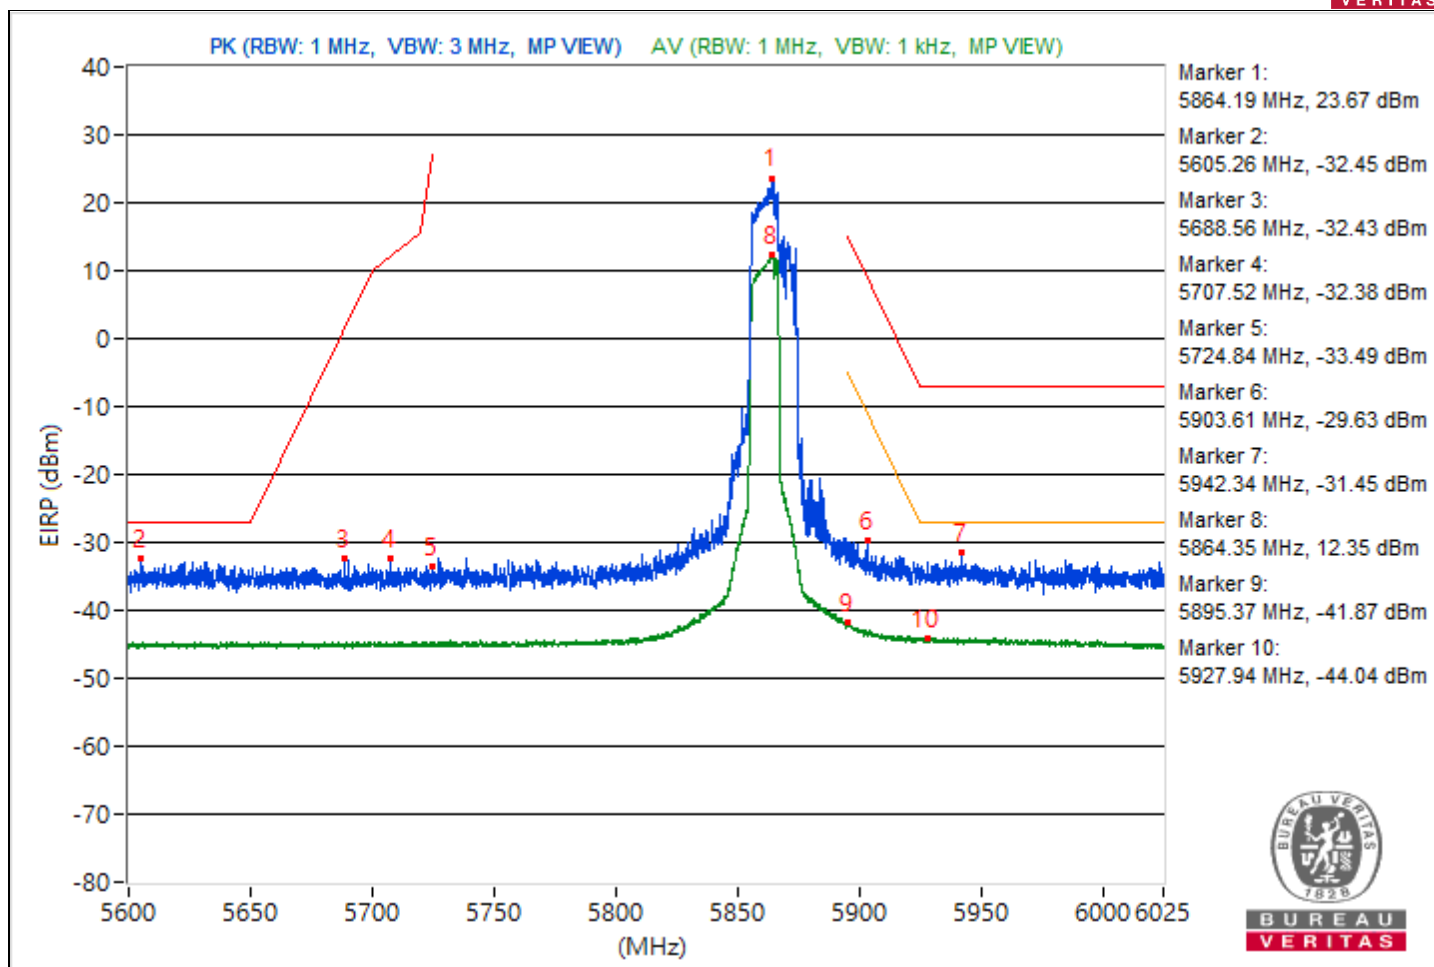


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.61	109.83 PK			9.65	4.92	14.57
2	#5627.62	62.44 PK	68.26	-5.82	-37.74	4.92	-32.82
3	#5673.42	62.28 PK	85.59	-23.31	-37.9	4.92	-32.98
4	#5706.52	62.55 PK	107.08	-44.53	-37.63	4.92	-32.71
5	#5723.04	61.79 PK	117.79	-56	-38.39	4.92	-33.47
6	#5895	99.31 PK	110.26	-10.95	-0.87	4.92	4.05
7	#5940.9	62.72 PK	88.26	-25.54	-37.46	4.92	-32.54
8	*5886.72	98.33 AV			-1.85	4.92	3.07
9	#5895	90.12 AV	90.26	-0.14	-10.06	4.92	-5.14
10	#5930.12	51.01 AV	68.26	-17.25	-49.17	4.92	-44.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

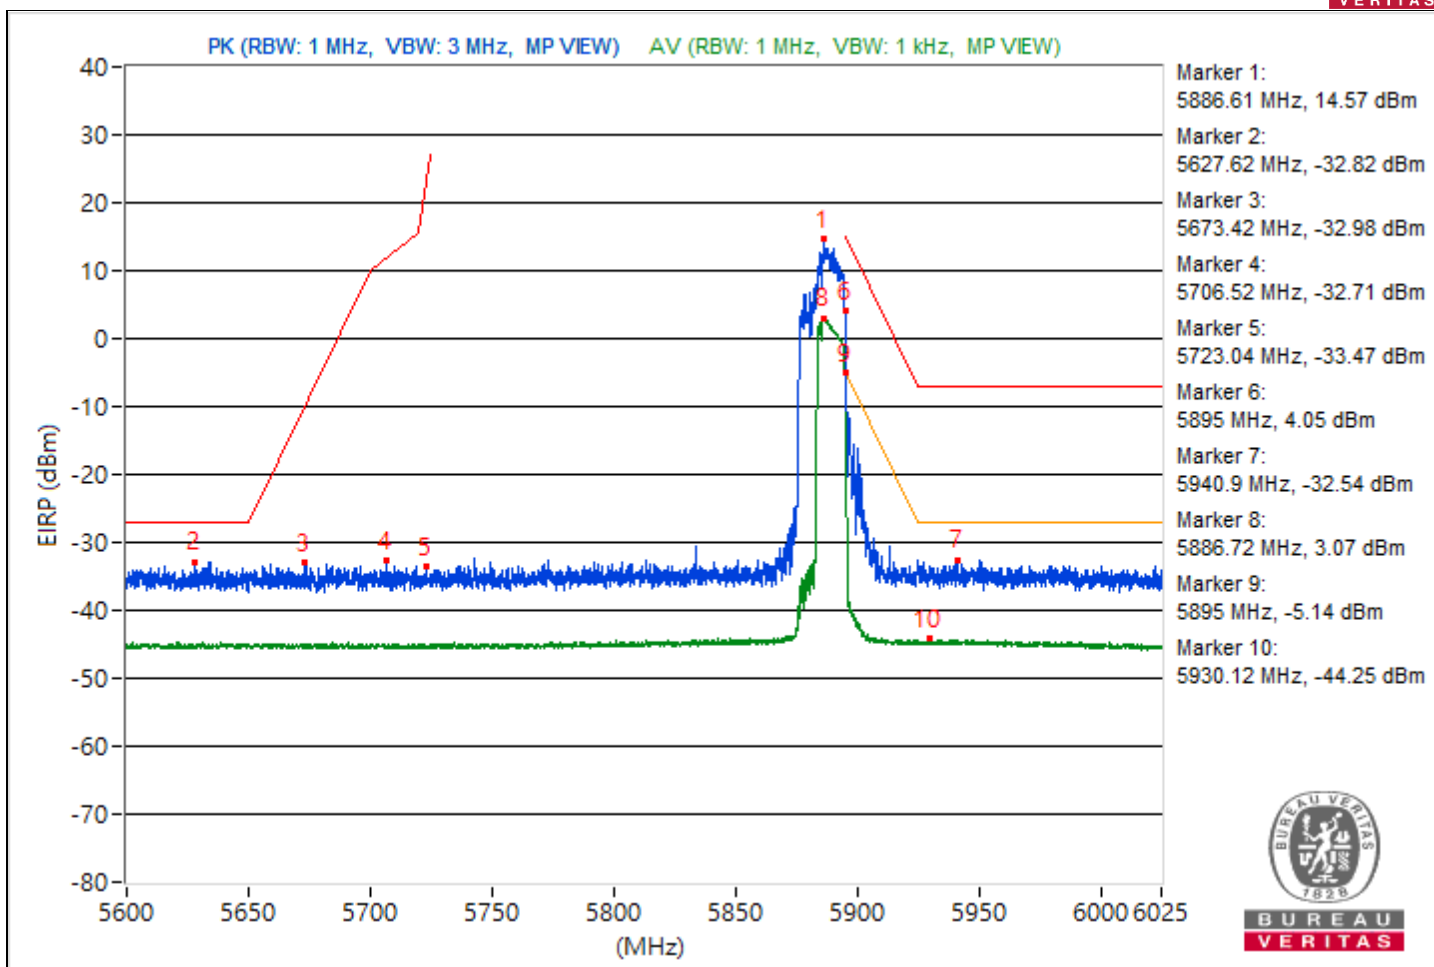


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5846.18	112.77 PK			12.59	4.92	17.51
2	#5617.58	61.22 PK	68.26	-7.04	-38.96	4.92	-34.04
3	#5652.27	61.8 PK	69.94	-8.14	-38.38	4.92	-33.46
4	#5715.87	62.78 PK	109.7	-46.92	-37.4	4.92	-32.48
5	#5721.02	62.2 PK	113.18	-50.98	-37.98	4.92	-33.06
6	#5895	91.98 PK	110.26	-18.28	-8.2	4.92	-3.28
7	#5940.16	76.23 PK	88.26	-12.03	-23.95	4.92	-19.03
8	*5851.92	102.06 AV			1.88	4.92	6.8
9	#5895	82.78 AV	90.26	-7.48	-17.4	4.92	-12.48
10	#5925.66	65.98 AV	68.26	-2.28	-34.2	4.92	-29.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

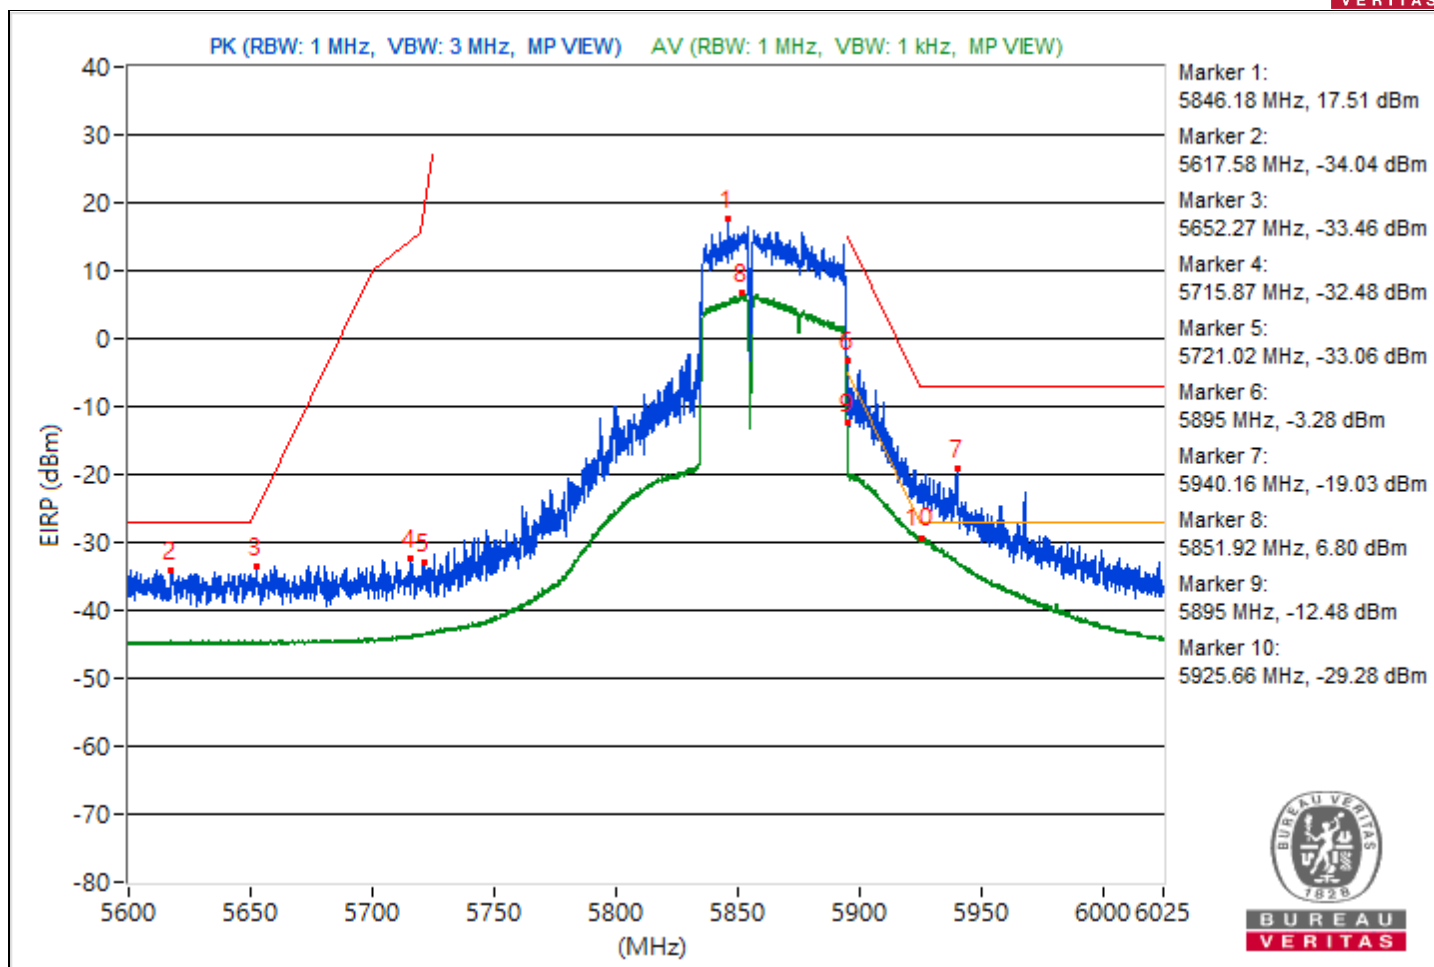


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5817.55	106.83 PK			6.65	4.92	11.57
2	#5649.62	61.97 PK	68.26	-6.29	-38.21	4.92	-33.29
3	#5662.32	64.12 PK	77.37	-13.25	-36.06	4.92	-31.14
4	#5706.83	62.61 PK	107.17	-44.56	-37.57	4.92	-32.65
5	#5724.31	64.14 PK	120.69	-56.55	-36.04	4.92	-31.12
6	#5895.11	77.85 PK	110.18	-32.33	-22.33	4.92	-17.41
7	#5932.3	64.34 PK	88.26	-23.92	-35.84	4.92	-30.92
8	*5813.3	95.99 AV			-4.19	4.92	0.73
9	#5896.12	64.24 AV	89.44	-25.2	-35.94	4.92	-31.02
10	#5925.55	53.22 AV	68.26	-15.04	-46.96	4.92	-42.04

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

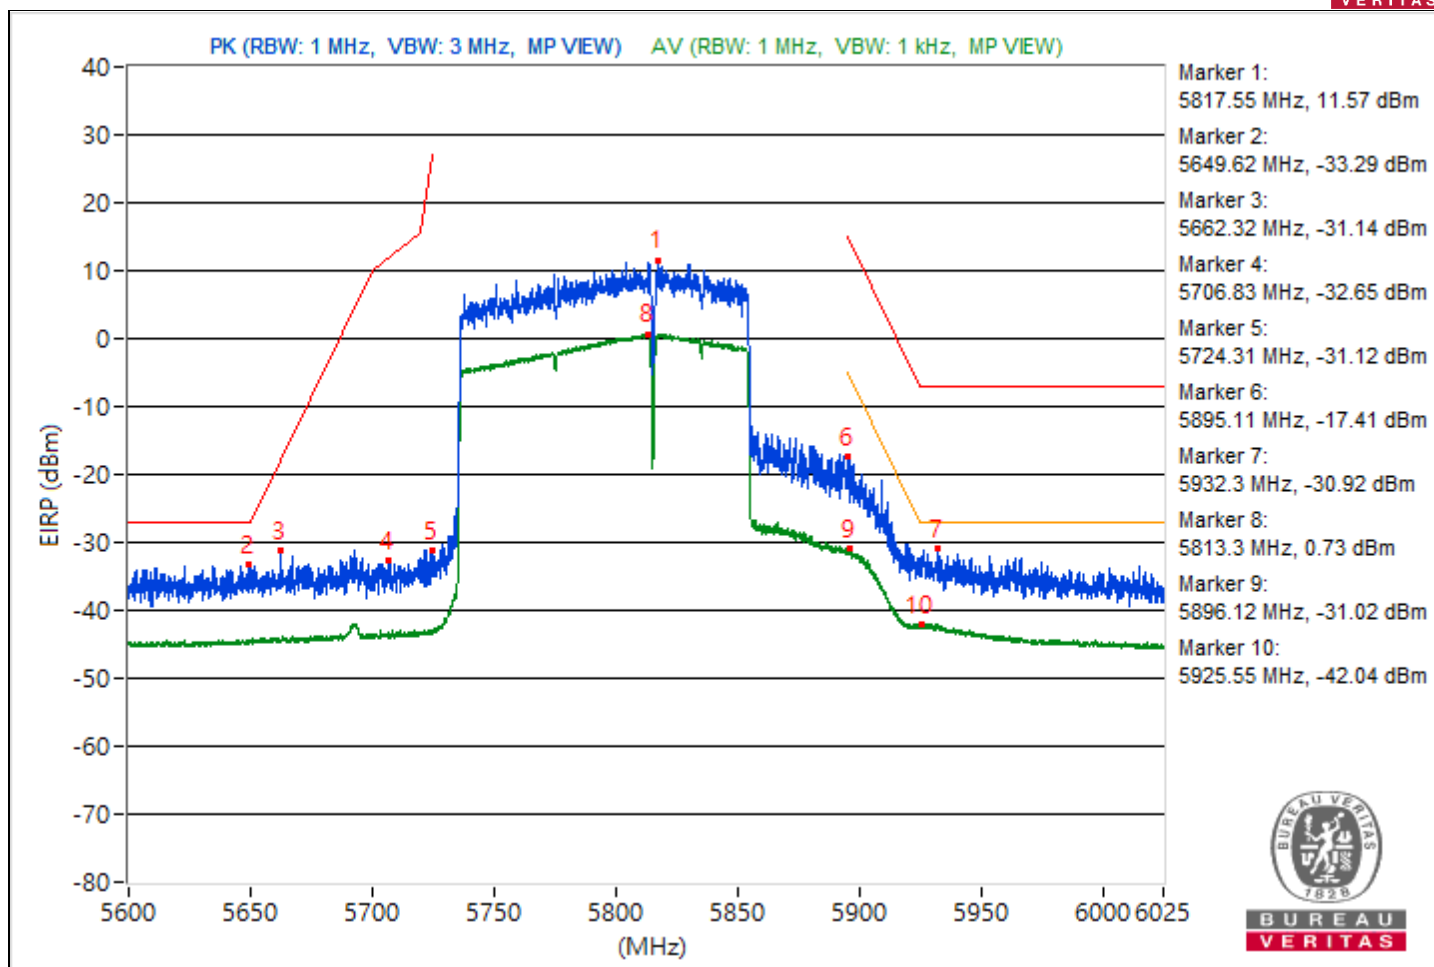


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5805.65	107.09 PK			6.91	4.92	11.83
2	#5617.58	63.65 PK	68.26	-4.61	-36.53	4.92	-31.61
3	#5694.51	65.13 PK	101.2	-36.07	-35.05	4.92	-30.13
4	#5700.46	66.47 PK	105.39	-38.92	-33.71	4.92	-28.79
5	#5722.35	63.93 PK	116.21	-52.28	-36.25	4.92	-31.33
6	#5898.99	80.09 PK	107.34	-27.25	-20.09	4.92	-15.17
7	#5936.97	67.41 PK	88.26	-20.85	-32.77	4.92	-27.85
8	*5818.5	96.61 AV			-3.57	4.92	1.35
9	#5897.39	66.9 AV	88.5	-21.6	-33.28	4.92	-28.36
10	#5925.5	55.87 AV	68.26	-12.39	-44.31	4.92	-39.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

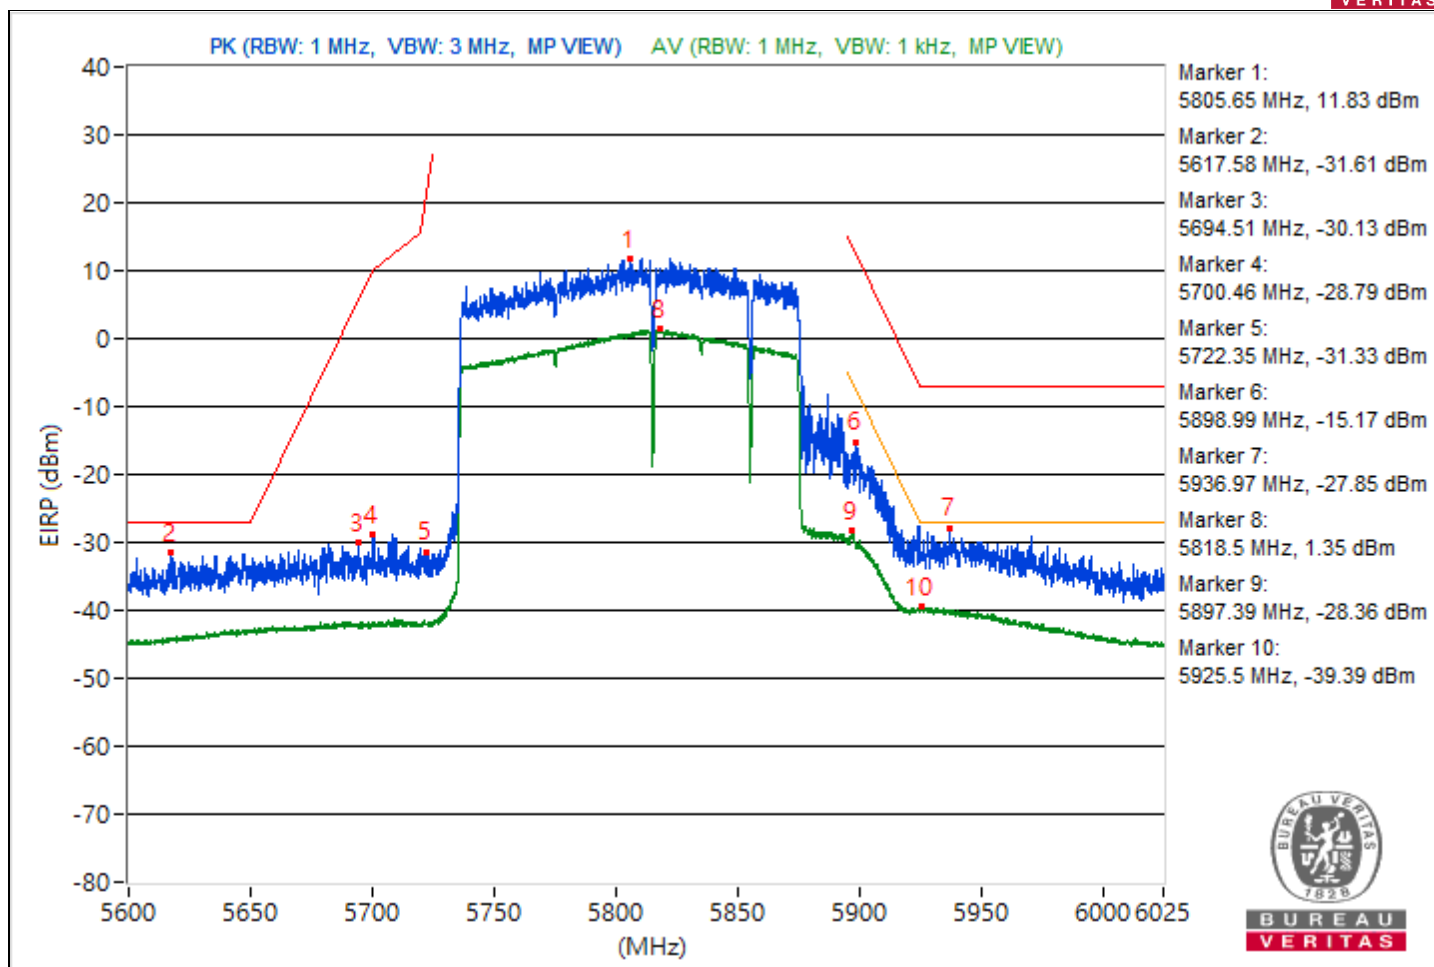


For 2TX
Conducted Unwanted Emissions


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5182.73	57.63 PK	68.26	-10.63	-46.43	-52.99	7.93	-37.63
2	3838.34	48.23 AV	54	-5.77	-58.34	-57.63	7.93	-47.03
3	11097.07	57.81 PK	74	-16.19	-46.16	-53.2	7.93	-37.45
4	10602.84	47 AV	54	-7	-58.89	-59.55	7.93	-48.26
5	18813	60.25 PK	74	-13.75	-44.32	-48.61	7.93	-35.01
6	19175.3	49.17 AV	54	-4.83	-56.57	-57.55	7.93	-46.09
7	22398.2	61.4 PK	74	-12.6	-43.17	-47.44	7.93	-33.86
8	23769.3	50.55 AV	54	-3.45	-56.17	-55.2	7.93	-44.71
9	39686.31	53.84 PK	74	-20.16	-49.99	-57.98	7.93	-41.42
10	38833.6	44.1 AV	54	-9.9	-61.74	-62.5	7.93	-51.16

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

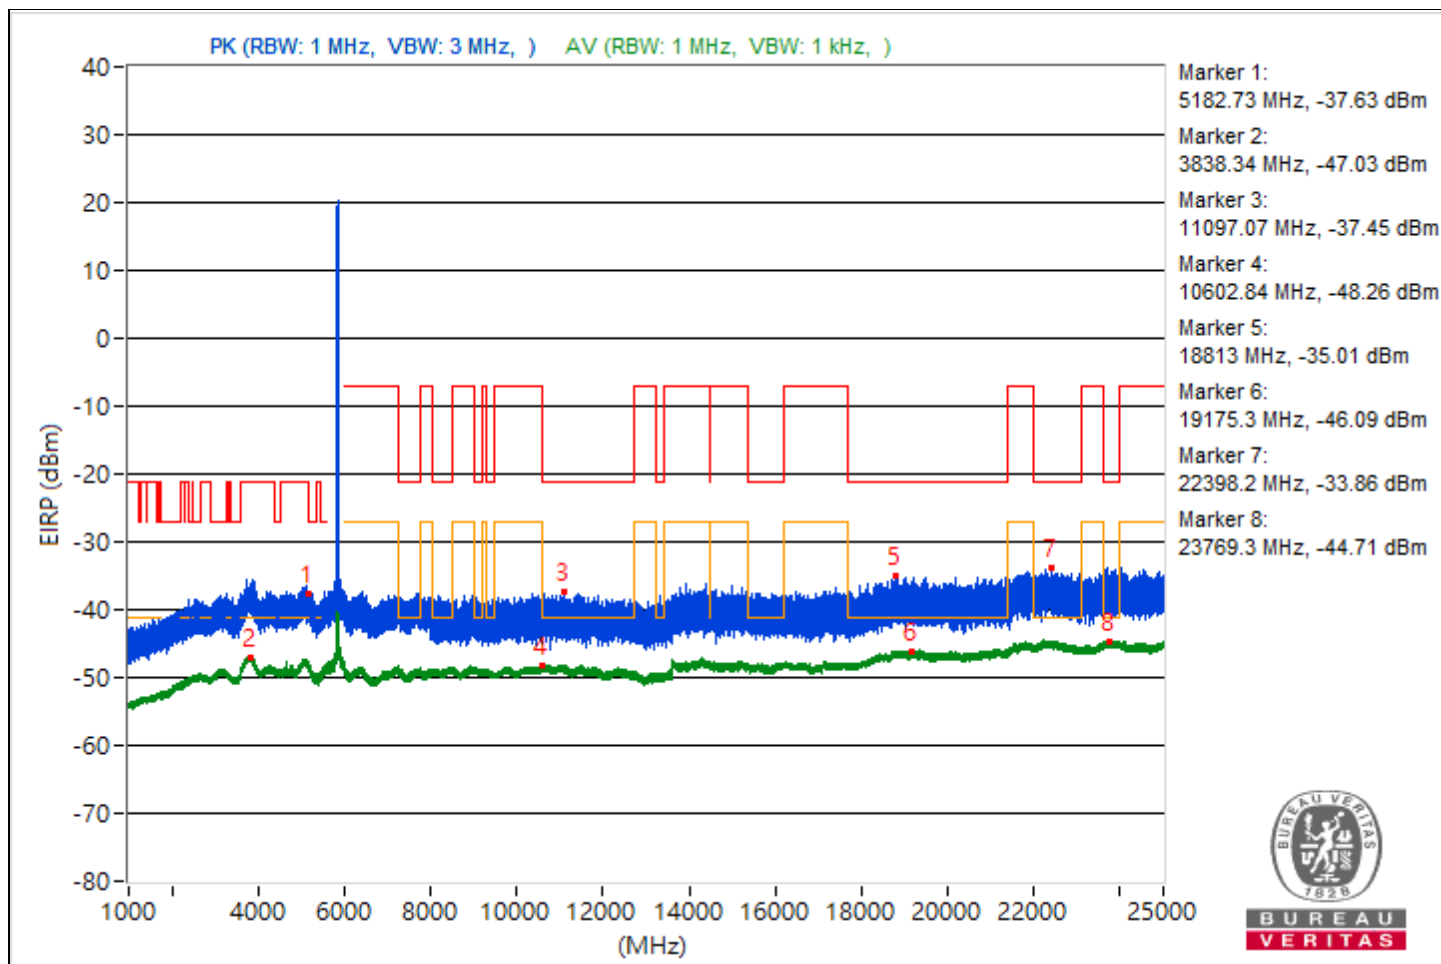

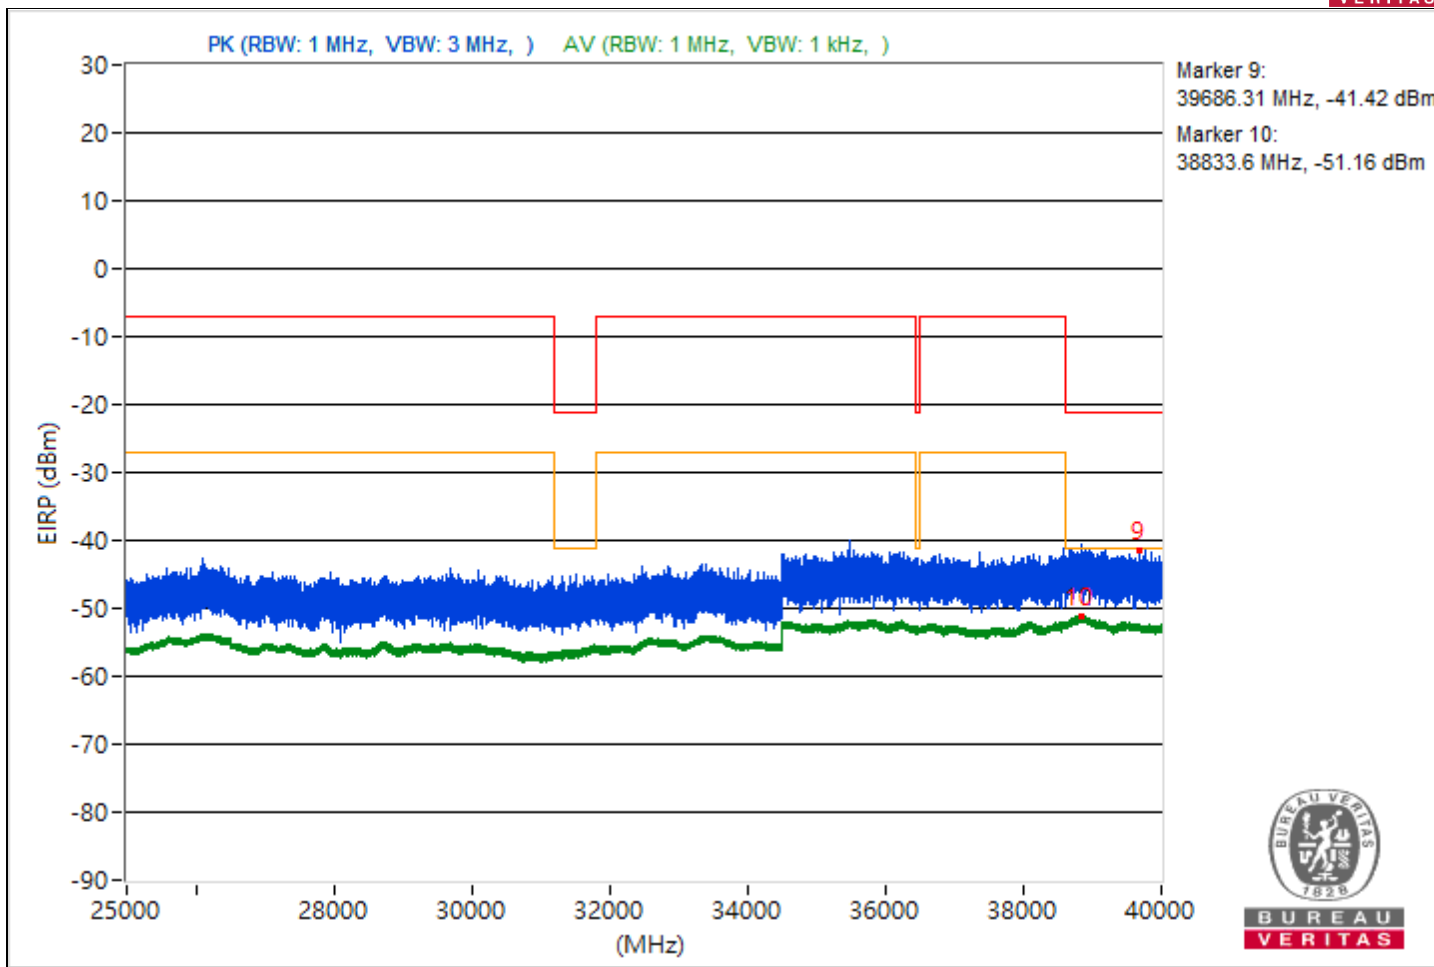



RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5171.53	57.32 PK	68.26	-10.94	-51.82	-47.14	7.93	-37.94
2	3822.24	48.48 AV	54	-5.52	-58.22	-57.28	7.93	-46.78
3	11000	57.56 PK	74	-16.44	-50.21	-47.49	7.93	-37.7
4	10979.02	46.95 AV	54	-7.05	-59.7	-58.85	7.93	-48.31
5	18740.4	60.95 PK	74	-13.05	-48.96	-43.28	7.93	-34.31
6	19174	49.29 AV	54	-4.71	-56.56	-57.29	7.93	-45.97
7	23765.2	61.12 PK	74	-12.88	-42.63	-51.26	7.93	-34.14
8	22214.8	50.57 AV	54	-3.43	-55.03	-56.34	7.93	-44.69
9	38897.69	54.89 PK	74	-19.11	-49.51	-54.42	7.93	-40.37
10	38810.31	44.17 AV	54	-9.83	-61.54	-62.59	7.93	-51.09

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

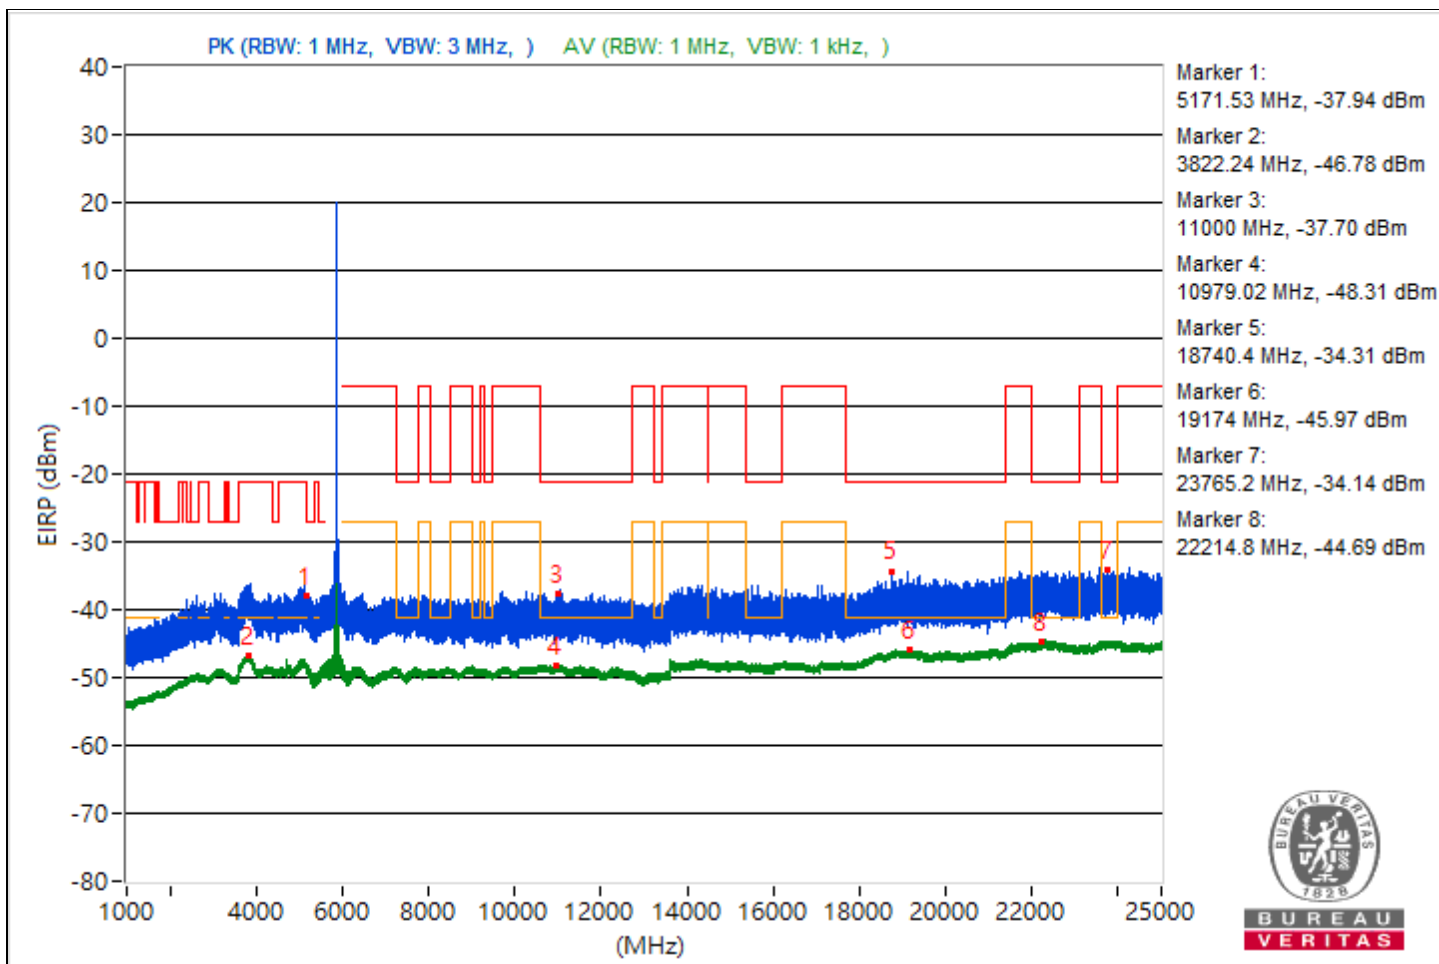

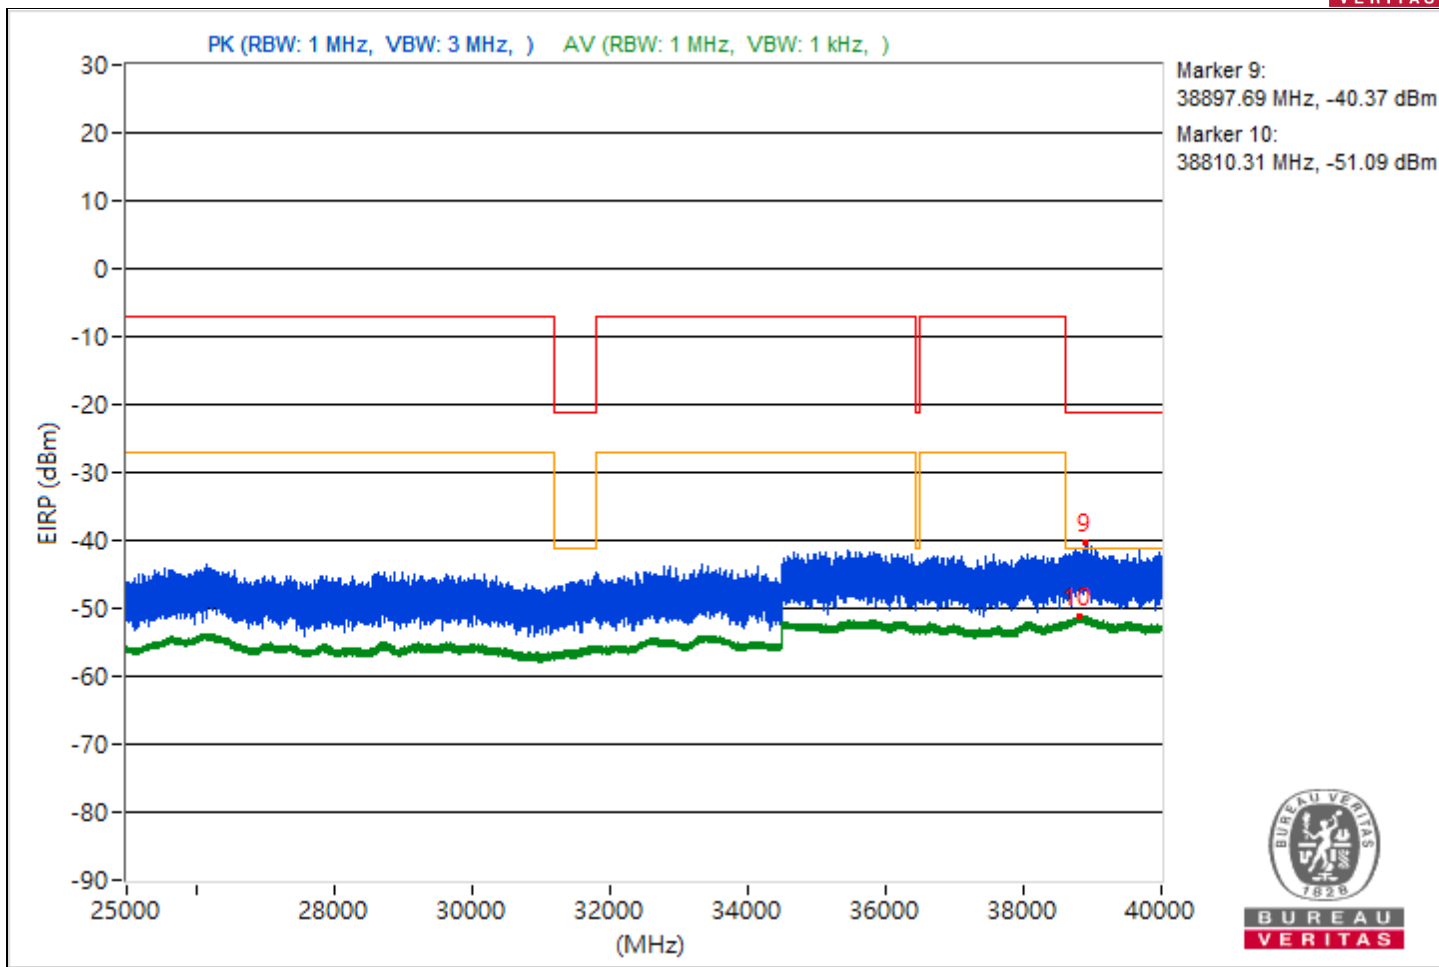



RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5169.67	58.57 PK	68.26	-9.69	-45.55	-51.79	7.93	-36.69
2	3804.98	48.39 AV	54	-5.61	-58.16	-57.48	7.93	-46.87
3	8120.89	58.03 PK	74	-15.97	-47.06	-49.67	7.93	-37.23
4	11062.93	46.97 AV	54	-7.03	-58.72	-59.81	7.93	-48.29
5	19466.3	59.19 PK	74	-14.81	-44.79	-51.75	7.93	-36.07
6	19212.6	49.09 AV	54	-4.91	-56.7	-57.56	7.93	-46.17
7	23901.9	61.33 PK	74	-12.67	-48.97	-42.8	7.93	-33.93
8	23643.6	50.71 AV	54	-3.29	-55.08	-55.94	7.93	-44.55
9	38753.07	55.89 PK	74	-18.11	-48.53	-53.39	7.93	-39.37
10	38839.47	44.42 AV	54	-9.58	-61.65	-61.92	7.93	-50.84

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

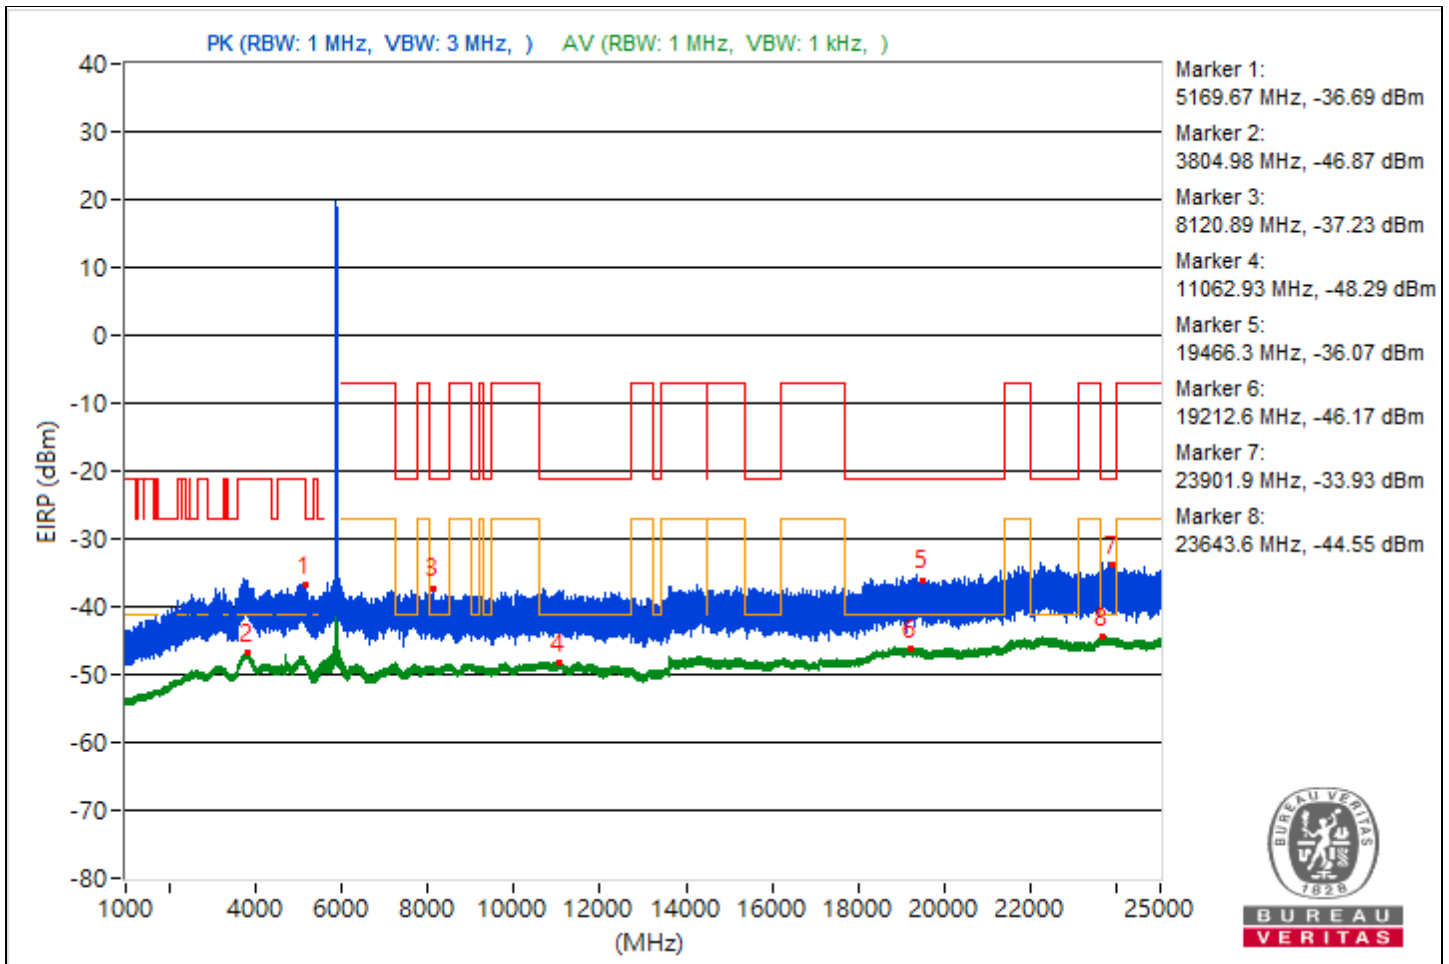

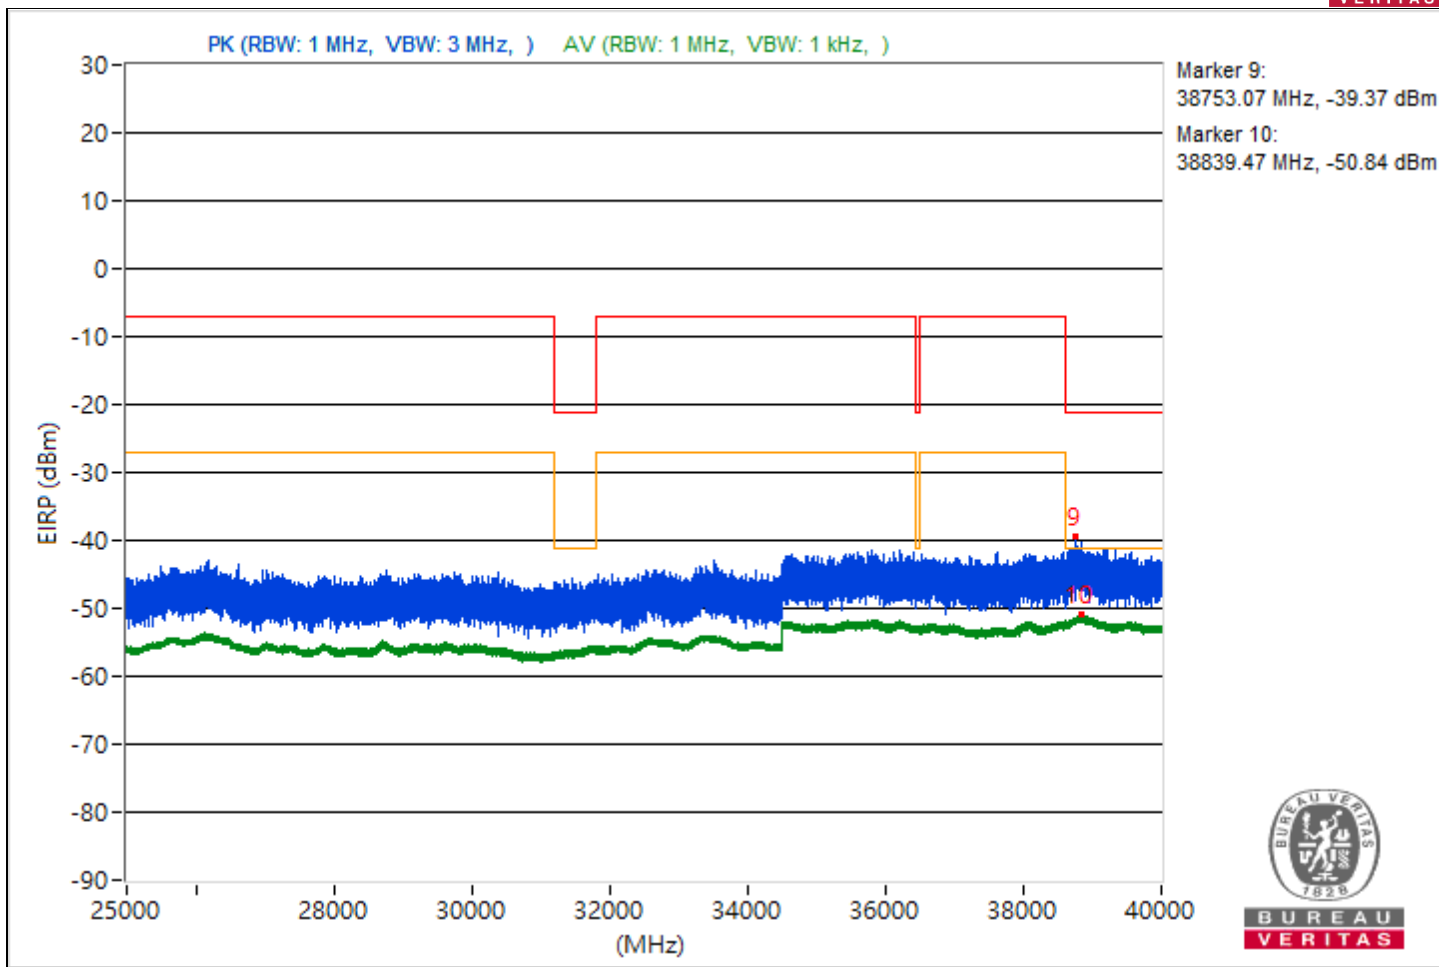




Conducted Band Edges

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5846.93	115.61 PK			8.42	10.22	7.93	20.35
2	#5637.67	66.94 PK	68.26	-1.32	-37.94	-41.18	7.93	-28.32
3	#5682.24	66.29 PK	92.12	-25.83	-38.55	-41.88	7.93	-28.97
4	#5718.2	66.31 PK	110.36	-44.05	-38.65	-41.63	7.93	-28.95
5	#5724.05	65.65 PK	120.09	-54.44	-39.77	-41.52	7.93	-29.61
6	#5908.34	67.42 PK	100.48	-33.06	-39.81	-37.94	7.93	-27.84
7	#5994.4	67.25 PK	88.26	-21.01	-37.47	-41.23	7.93	-28.01
8	*5845.92	107.04 AV			0.47	1.17	7.93	11.78
9	#5896.01	56.67 AV	89.52	-32.85	-49.37	-49.7	7.93	-38.59
10	#5930.49	56.57 AV	68.26	-11.69	-49.73	-49.53	7.93	-38.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

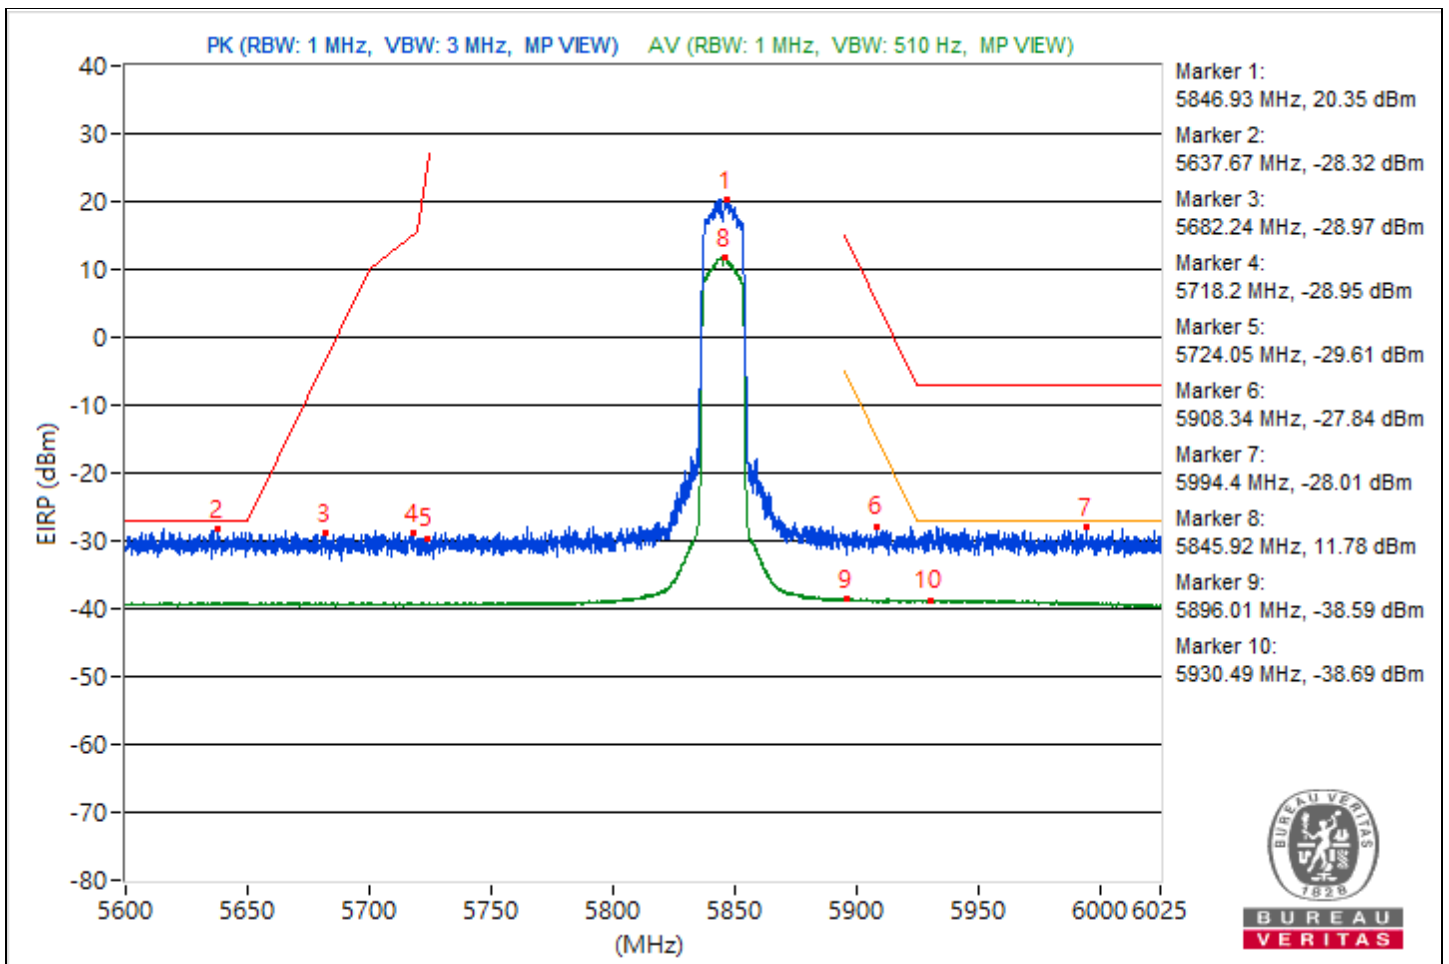




RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5866.69	116.43 PK			9.57	10.8	7.93	21.17
2	#5621.36	66.7 PK	68.26	-1.56	-40.63	-38.6	7.93	-28.56
3	#5669.65	66.63 PK	82.8	-16.17	-38.32	-41.33	7.93	-28.63
4	#5719.11	67.32 PK	110.61	-43.29	-37.55	-40.81	7.93	-27.94
5	#5724.37	65.76 PK	120.81	-55.05	-39.51	-41.62	7.93	-29.5
6	#5897.66	67.98 PK	108.31	-40.33	-39.58	-37.19	7.93	-27.28
7	#5927.99	67 PK	88.26	-21.26	-38.12	-40.64	7.93	-28.26
8	*5865.89	107.3 AV			0.66	1.5	7.93	12.04
9	#5895.59	57.44 AV	89.83	-32.39	-49	-48.54	7.93	-37.82
10	#5925.02	56.64 AV	68.26	-11.62	-49.39	-49.73	7.93	-38.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

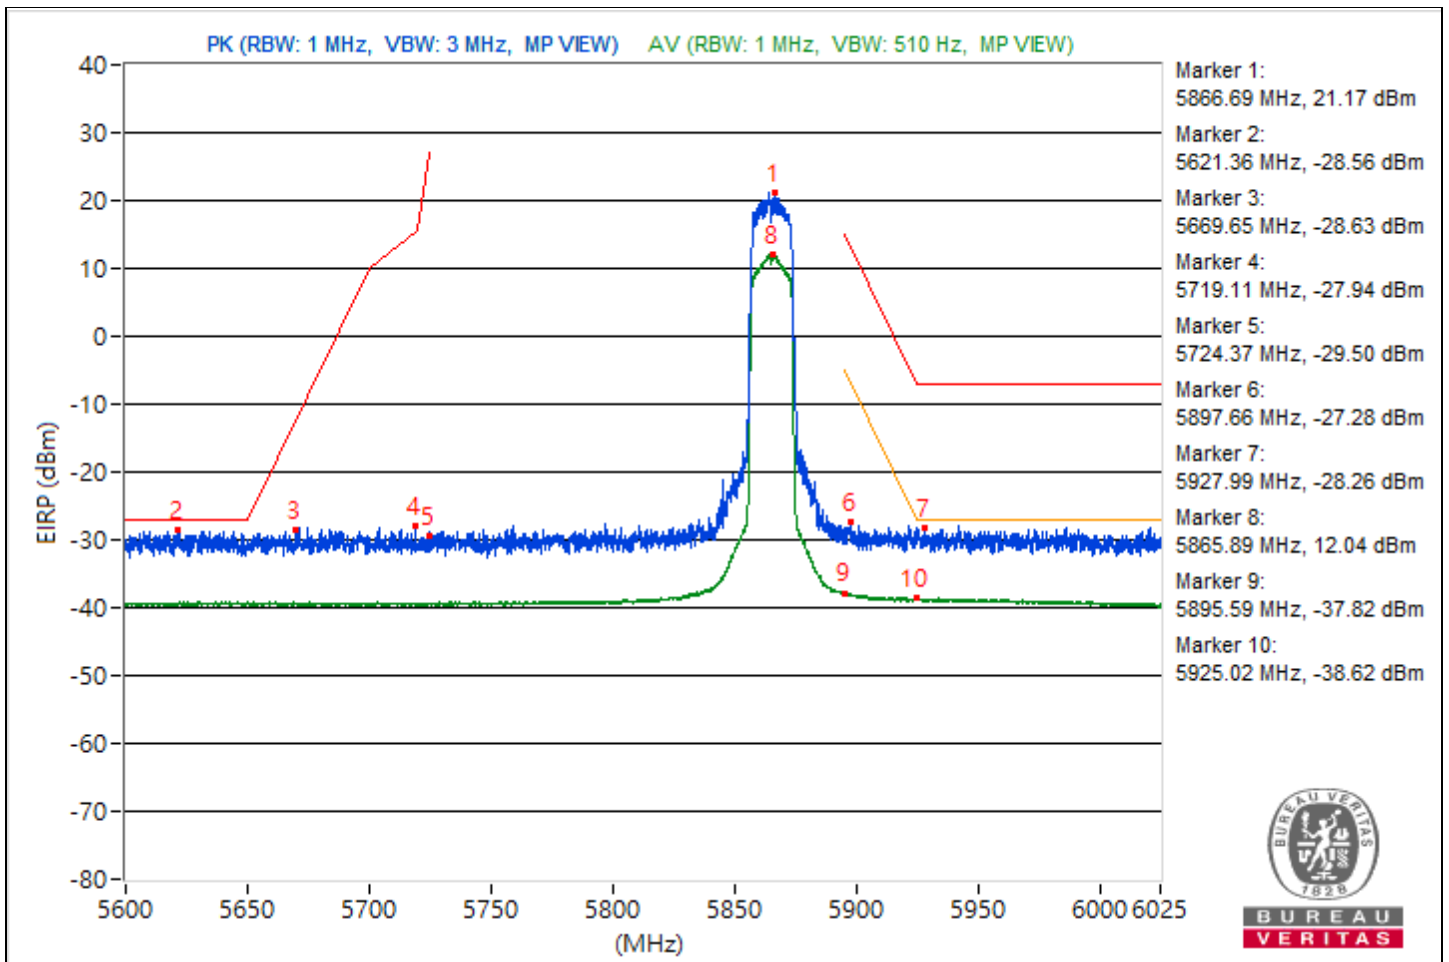


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.66	116.93 PK			8.91	12.01	7.93	21.67
2	#5634	66.48 PK	68.26	-1.78	-41.35	-38.53	7.93	-28.78
3	#5668.96	66.7 PK	82.29	-15.59	-41	-38.39	7.93	-28.56
4	#5715.71	67.07 PK	109.66	-42.59	-37.43	-41.94	7.93	-28.19
5	#5721.34	66.33 PK	113.91	-47.58	-38.73	-41.42	7.93	-28.93
6	#5895.48	91.35 PK	109.91	-18.56	-13.44	-16.96	7.93	-3.91
7	#5929.85	68.02 PK	88.26	-20.24	-38.75	-37.68	7.93	-27.24
8	*5884.06	107.12 AV			0.84	0.99	7.93	11.86
9	#5895	77.15 AV	90.26	-13.11	-29.66	-28.51	7.93	-18.11
10	#5941.27	56.63 AV	68.26	-11.63	-49.36	-49.79	7.93	-38.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

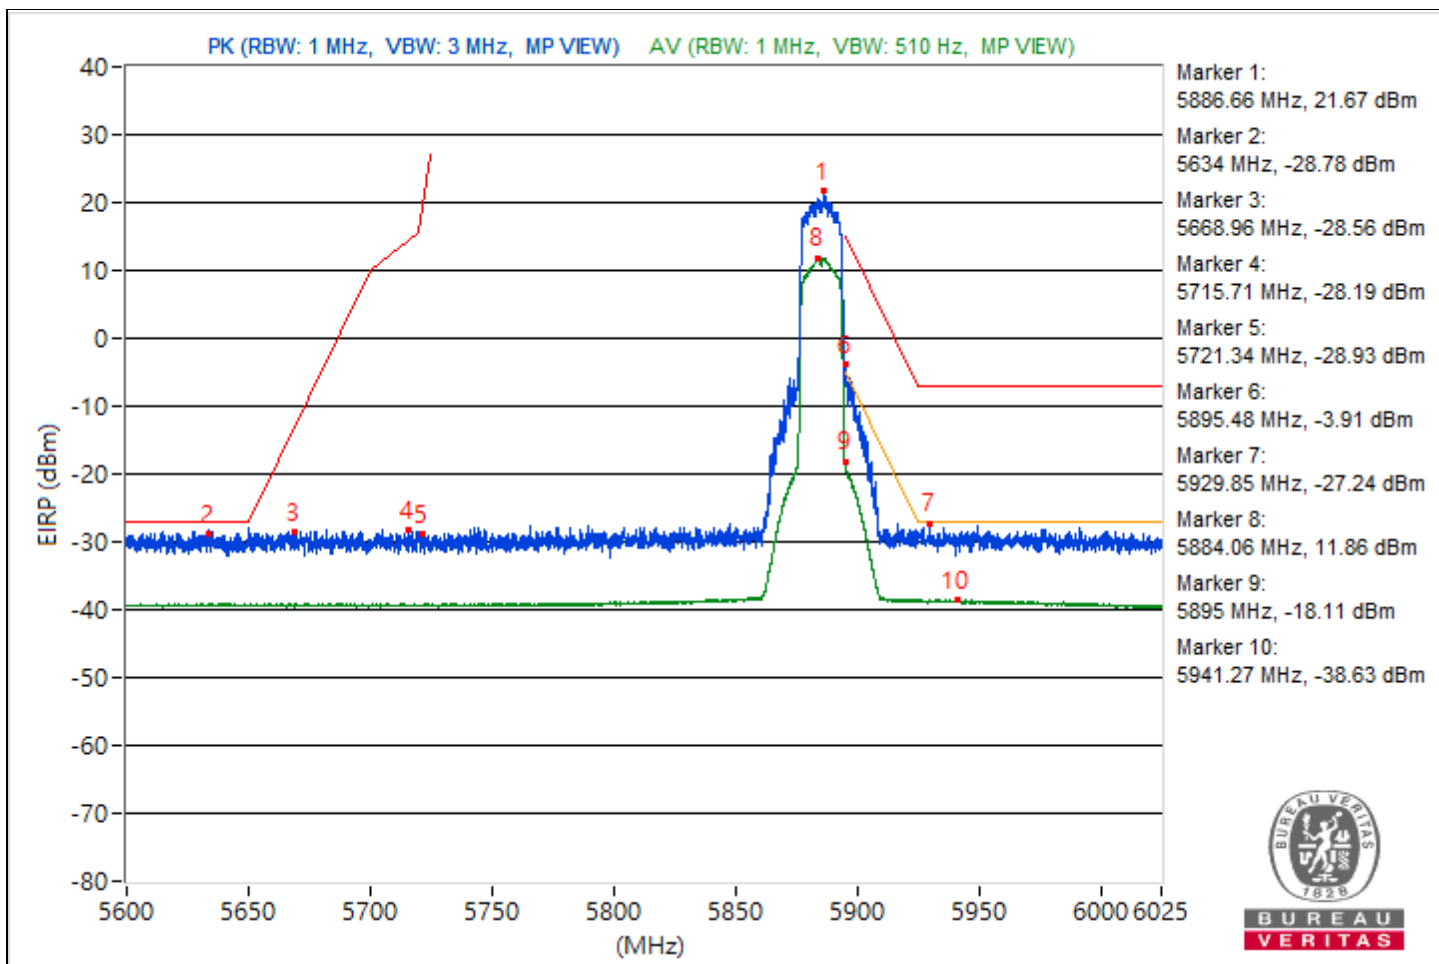


**For 2S2T
Conducted Unwanted Emissions**


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5584.3	54.41 PK	68.26	-13.85	-51.36	-47.18	4.92	-40.85
2	3812.76	45.46 AV	54	-8.54	-57.29	-58.21	4.92	-49.8
3	11477.69	54.53 PK	74	-19.47	-51.53	-46.95	4.92	-40.73
4	10630.76	43.93 AV	54	-10.07	-58.96	-59.58	4.92	-51.33
5	18714.1	57.97 PK	74	-16.03	-49.02	-43.22	4.92	-37.29
6	19218.7	46.25 AV	54	-7.75	-56.8	-57.1	4.92	-49.01
7	22118.2	58.17 PK	74	-15.83	-43.2	-48.22	4.92	-37.09
8	22260.4	47.59 AV	54	-6.41	-55.88	-55.34	4.92	-47.67
9	39177.42	52.01 PK	74	-21.99	-49.28	-54.64	4.92	-43.25
10	38824.89	41.11 AV	54	-12.89	-61.62	-62.6	4.92	-54.15

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

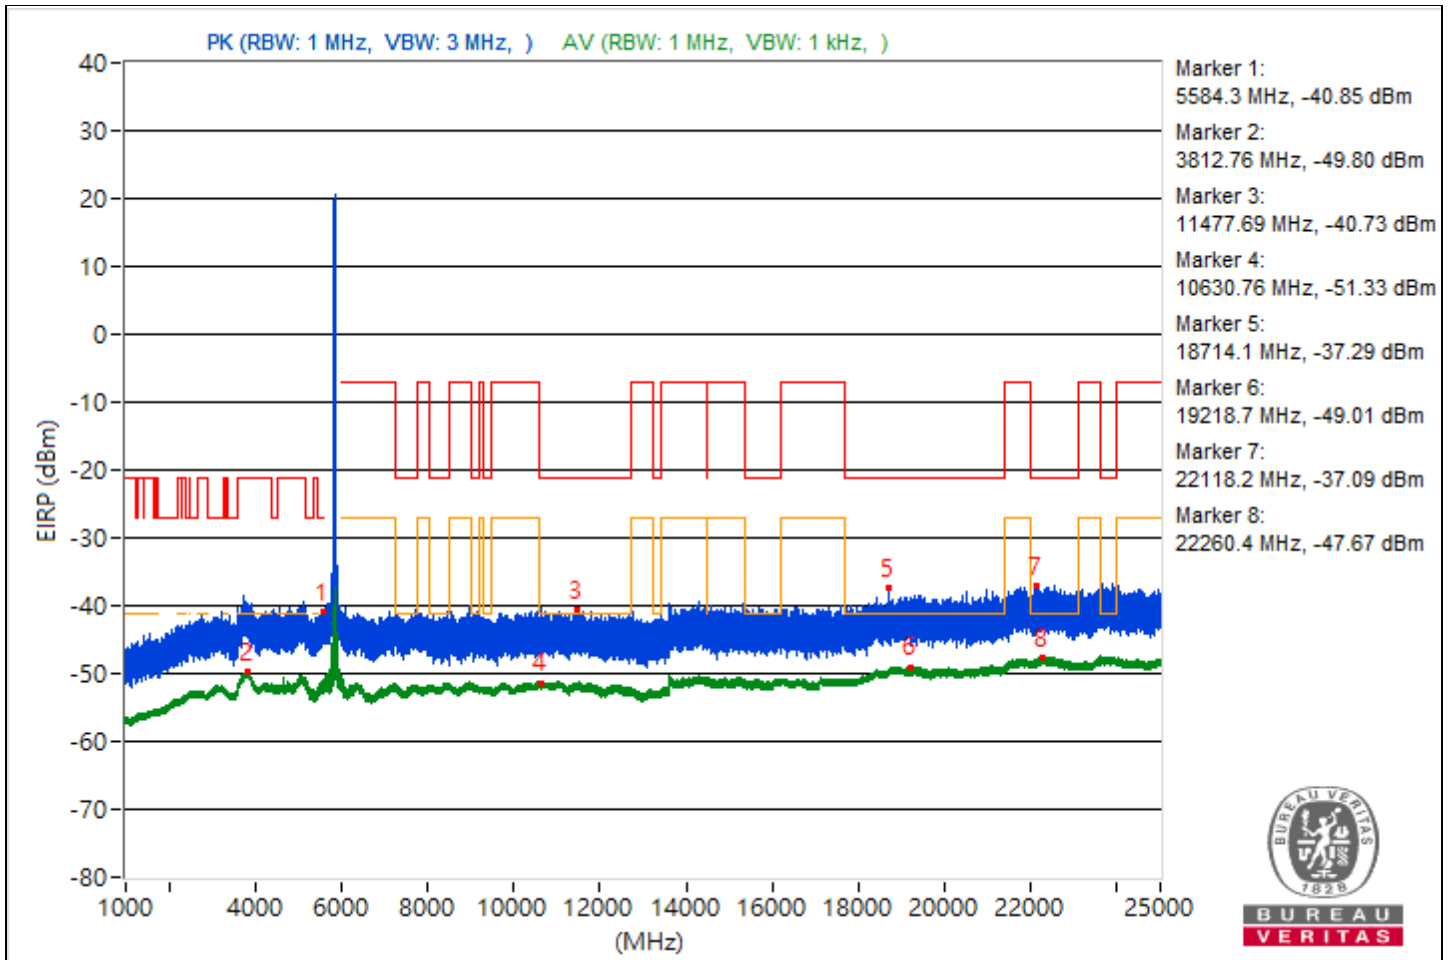

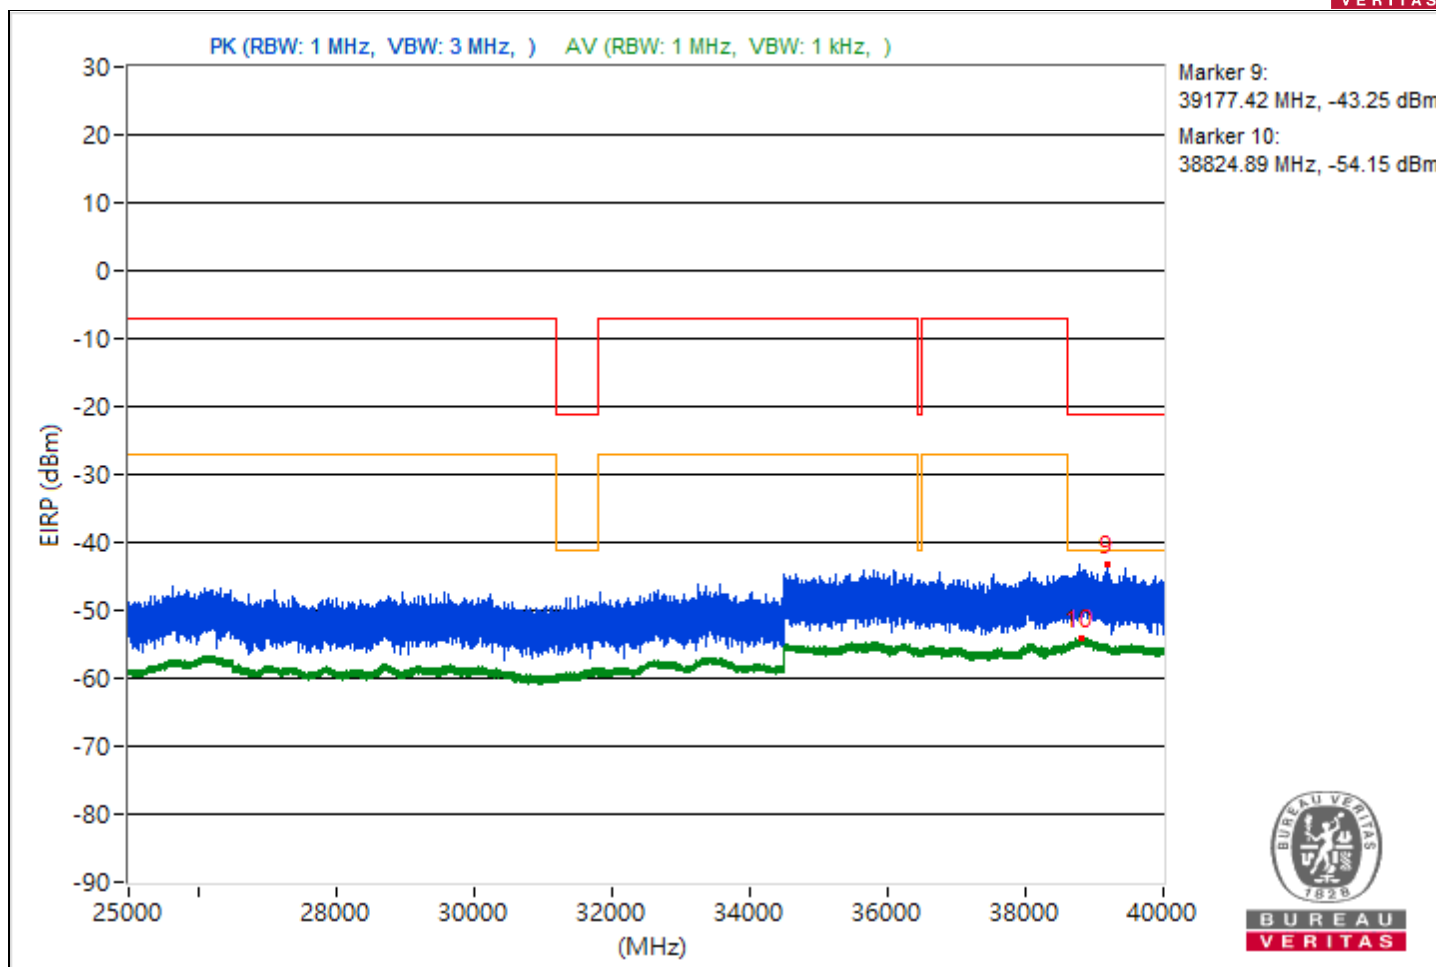



RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4462.12	54.52 PK	68.26	-13.74	-46.66	-52.52	4.92	-40.74
2	3822.87	45.55 AV	54	-8.45	-57.81	-57.48	4.92	-49.71
3	11050.58	54.84 PK	74	-19.16	-53.22	-46.11	4.92	-40.42
4	10660.27	44.1 AV	54	-9.9	-58.69	-59.52	4.92	-51.16
5	19056.8	56.74 PK	74	-17.26	-48.48	-45.07	4.92	-38.52
6	19359.5	46 AV	54	-8	-56.75	-57.68	4.92	-49.26
7	22280.8	58.21 PK	74	-15.79	-49.44	-42.82	4.92	-37.05
8	23769.6	47.56 AV	54	-6.44	-55.15	-56.16	4.92	-47.7
9	39107.02	51.44 PK	74	-22.56	-49.62	-56.11	4.92	-43.82
10	38827.91	41.23 AV	54	-12.77	-61.76	-62.17	4.92	-54.03

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

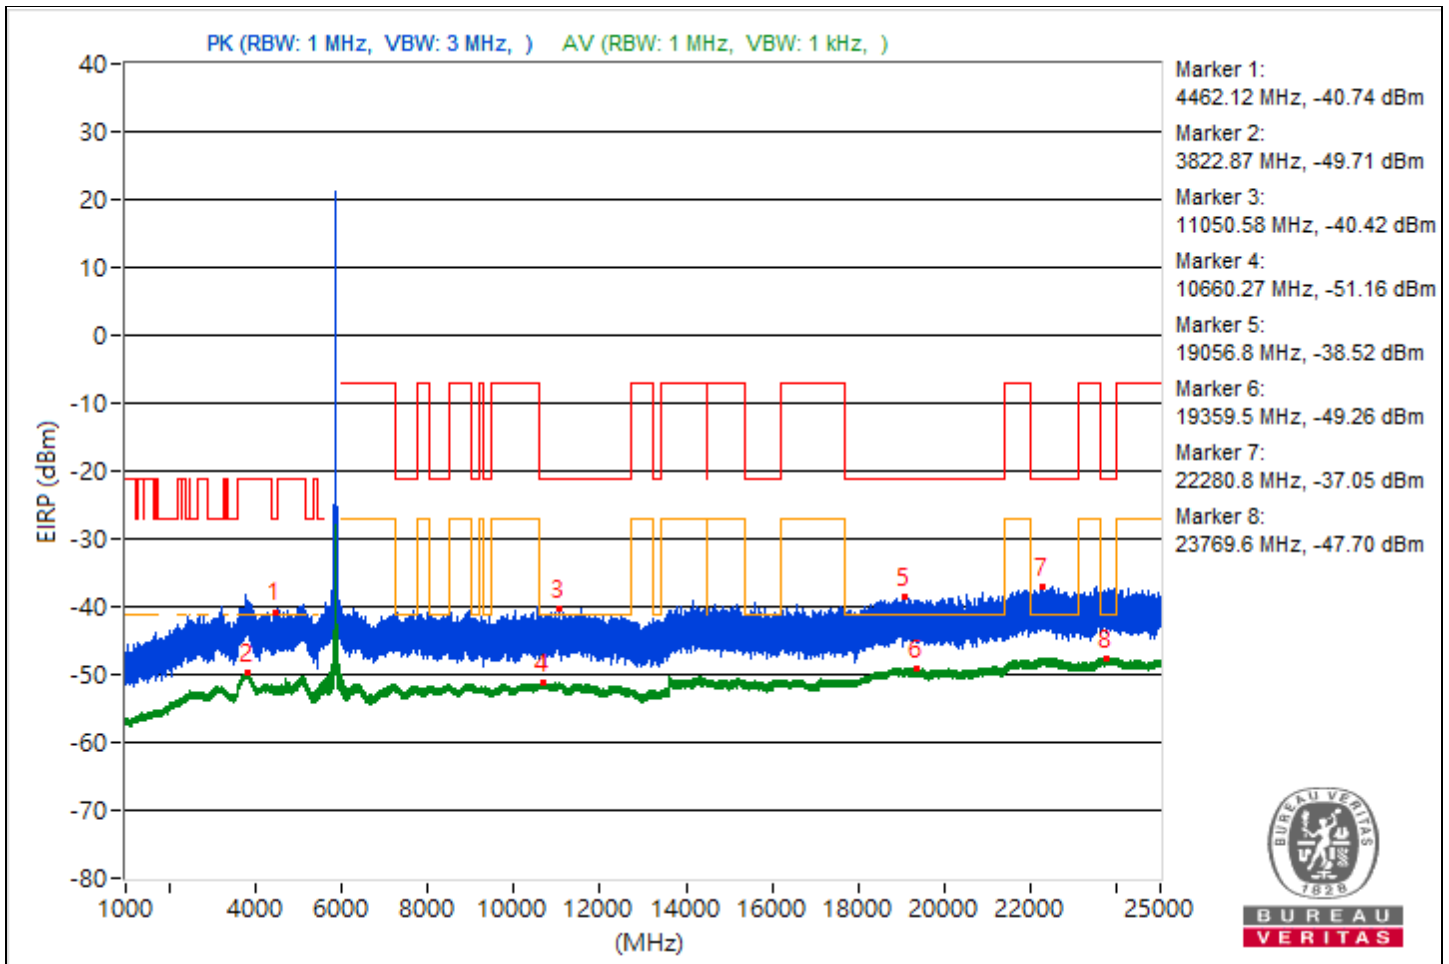

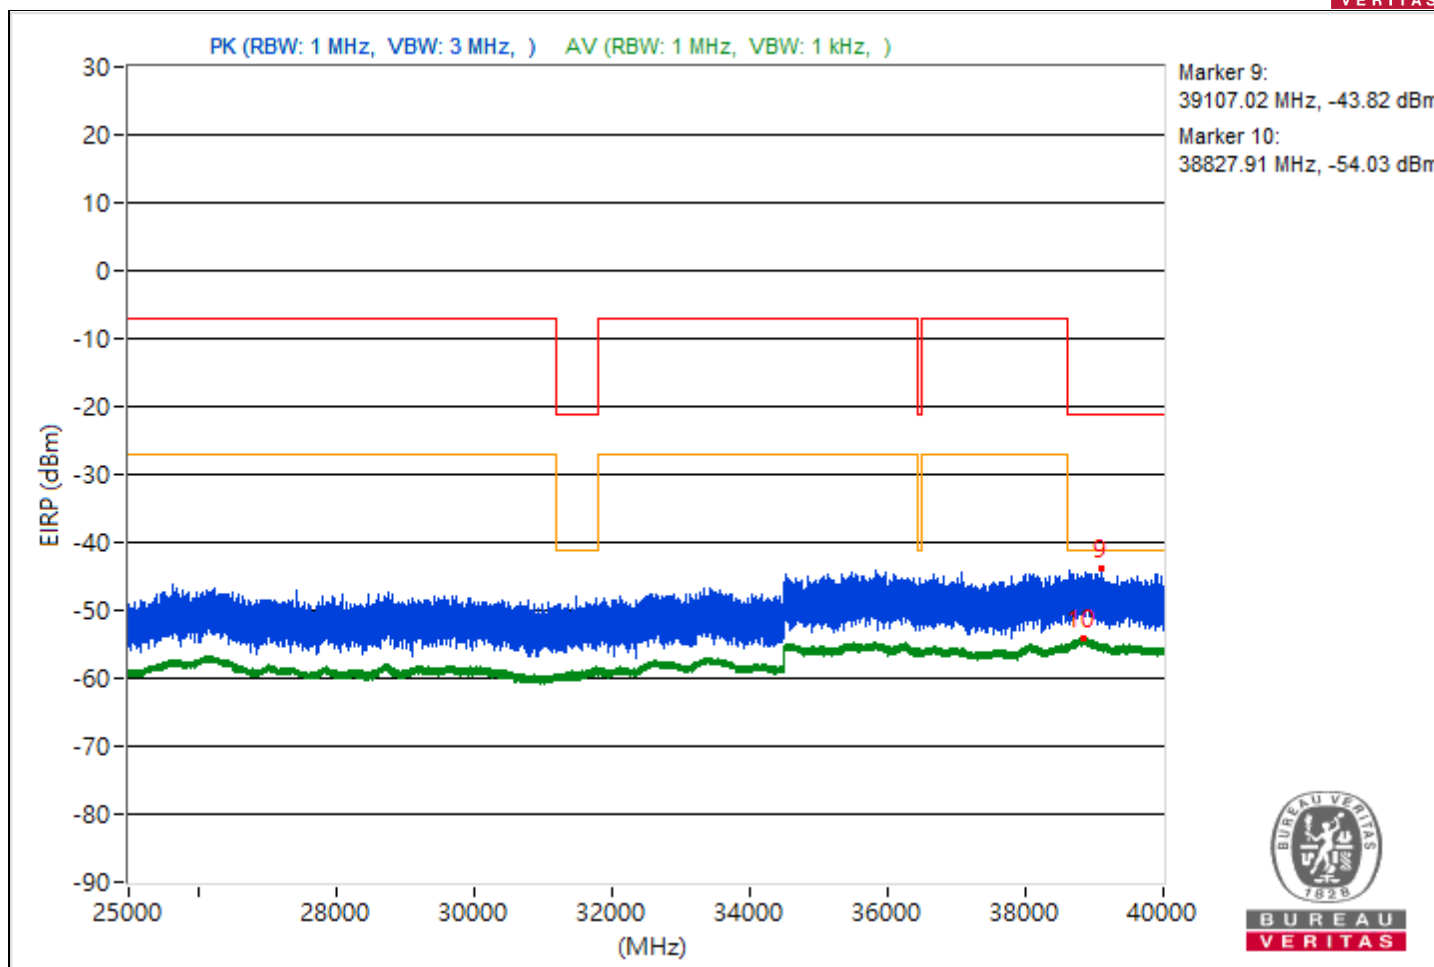



RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5577.22	54.56 PK	68.26	-13.7	-46.8	-51.87	4.92	-40.7
2	3816.57	45.42 AV	54	-8.58	-57.36	-58.22	4.92	-49.84
3	11029.69	54.36 PK	74	-19.64	-46.66	-53.36	4.92	-40.9
4	10973.87	44.05 AV	54	-9.95	-58.86	-59.44	4.92	-51.21
5	19196.7	56.68 PK	74	-17.32	-44.47	-50.5	4.92	-38.58
6	18847.3	46.15 AV	54	-7.85	-56.72	-57.38	4.92	-49.11
7	22667.6	57.96 PK	74	-16.04	-48.25	-43.47	4.92	-37.3
8	22352.7	47.68 AV	54	-6.32	-55.09	-55.98	4.92	-47.58
9	38734.84	51.35 PK	74	-22.65	-55.49	-49.89	4.92	-43.91
10	38851.64	41.25 AV	54	-12.75	-62.05	-61.84	4.92	-54.01

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

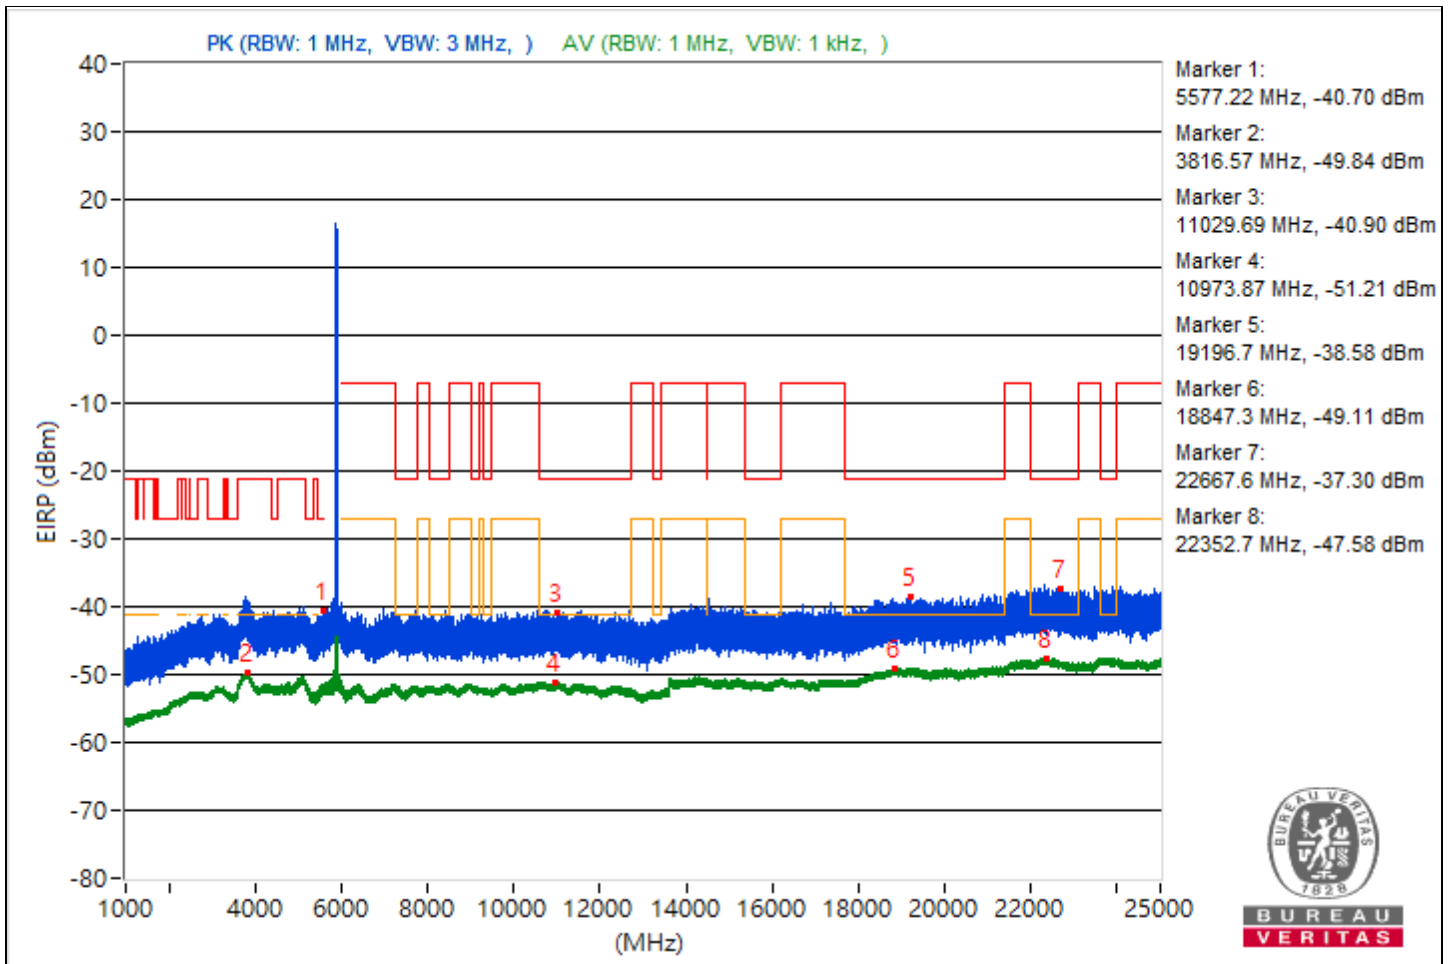

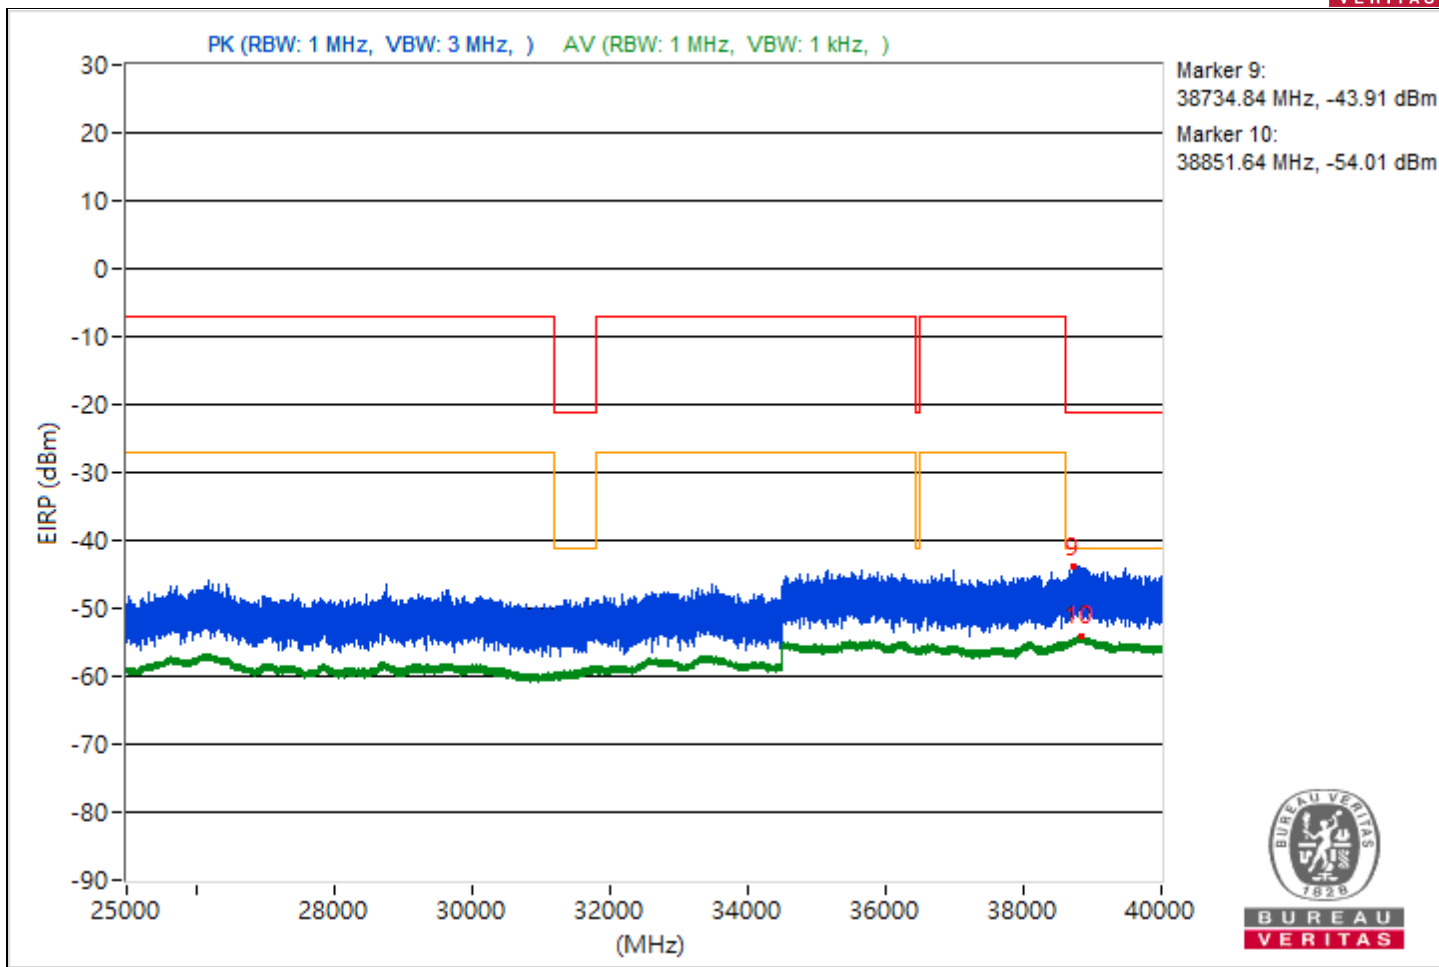





RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4479.23	55.24 PK	68.26	-13.02	-45.74	-52.71	4.92	-40.02
2	3799.61	45.6 AV	54	-8.4	-57.46	-57.73	4.92	-49.66
3	11883.82	55.09 PK	74	-18.91	-46.87	-49.83	4.92	-40.17
4	11006.93	43.89 AV	54	-10.11	-59.72	-58.92	4.92	-51.37
5	19132.5	56.37 PK	74	-17.63	-51.35	-44.65	4.92	-38.89
6	18877.8	46.11 AV	54	-7.89	-56.7	-57.5	4.92	-49.15
7	22676.8	58.16 PK	74	-15.84	-43.79	-46.76	4.92	-37.1
8	22289.8	47.73 AV	54	-6.27	-55.22	-55.7	4.92	-47.53
9	38734.76	51.02 PK	74	-22.98	-57.31	-49.88	4.92	-44.24
10	38817.69	41.06 AV	54	-12.94	-61.71	-62.59	4.92	-54.2

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

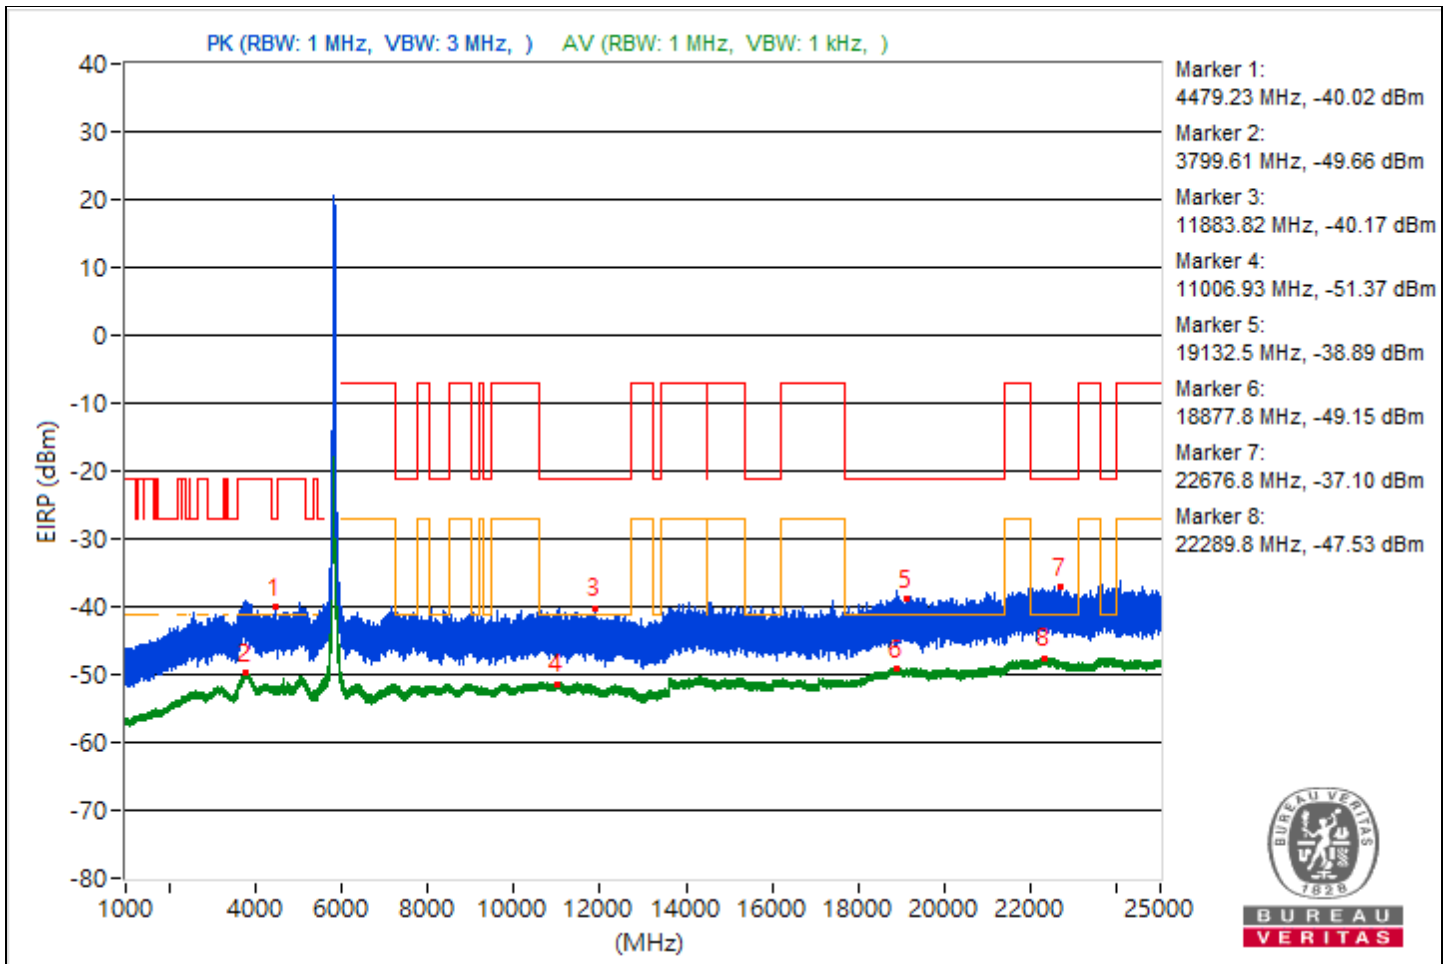

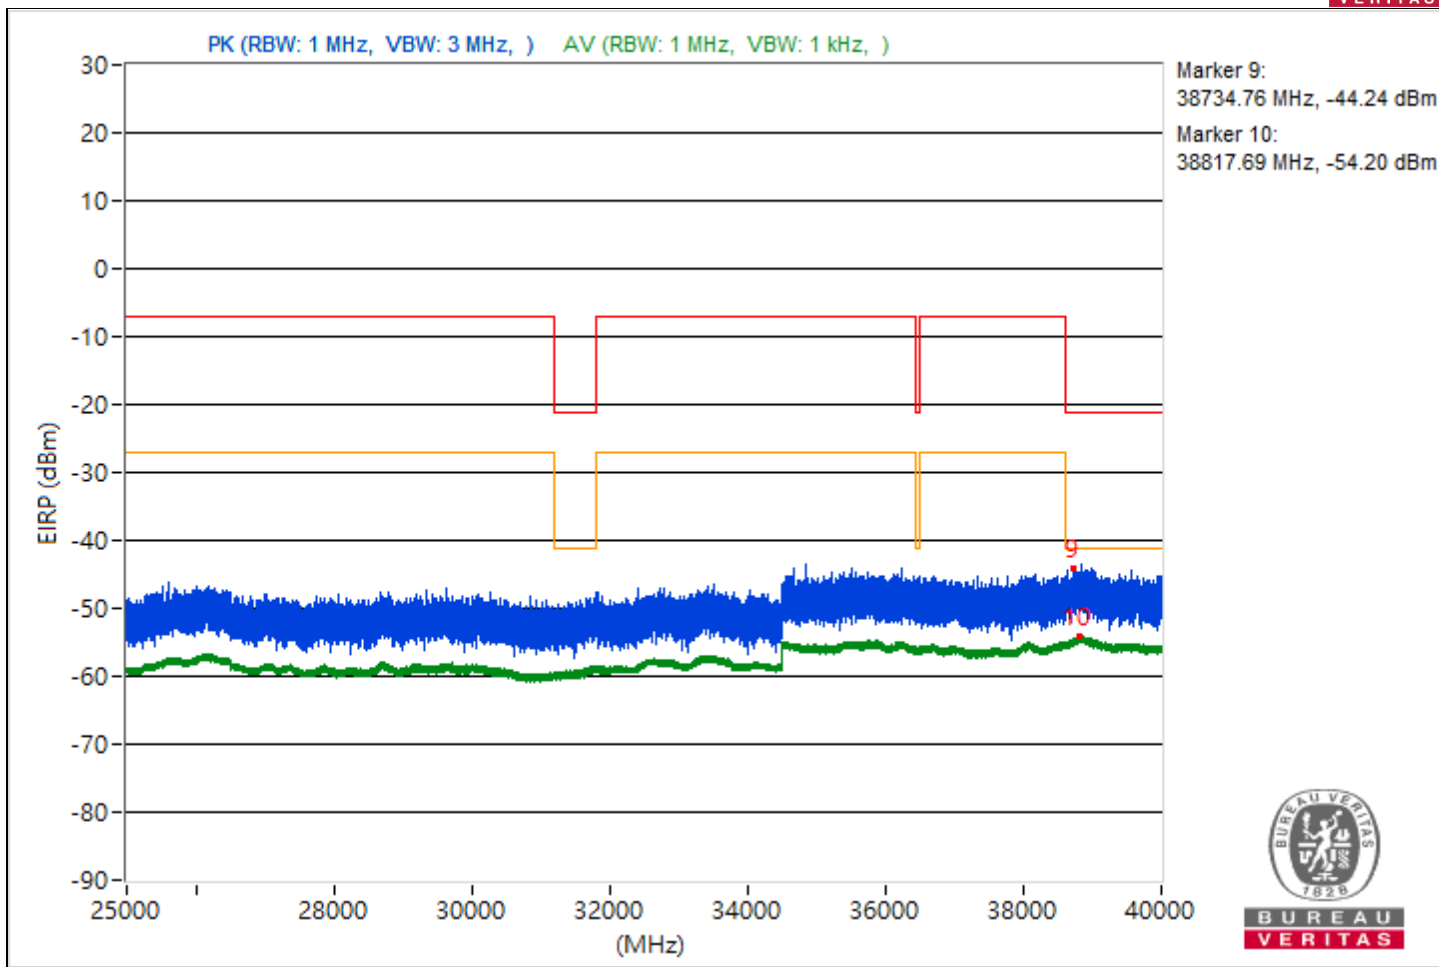



RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5151.54	55.52 PK	68.26	-12.74	-46.94	-48.56	4.92	-39.74
2	3796.27	45.74 AV	54	-8.26	-57.32	-57.6	4.92	-49.52
3	10615.38	54.69 PK	74	-19.31	-51.09	-46.89	4.92	-40.57
4	11038.84	44.02 AV	54	-9.98	-59.53	-58.84	4.92	-51.24
5	18998.6	56.7 PK	74	-17.3	-44.68	-49.65	4.92	-38.56
6	19313.5	46.18 AV	54	-7.82	-56.8	-57.23	4.92	-49.08
7	20440.4	58 PK	74	-16	-48.95	-43.2	4.92	-37.26
8	23789.2	47.78 AV	54	-6.22	-55.13	-55.7	4.92	-47.48
9	38765.51	51.45 PK	74	-22.55	-57.19	-49.4	4.92	-43.81
10	38810.22	41.2 AV	54	-12.8	-61.56	-62.48	4.92	-54.06

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

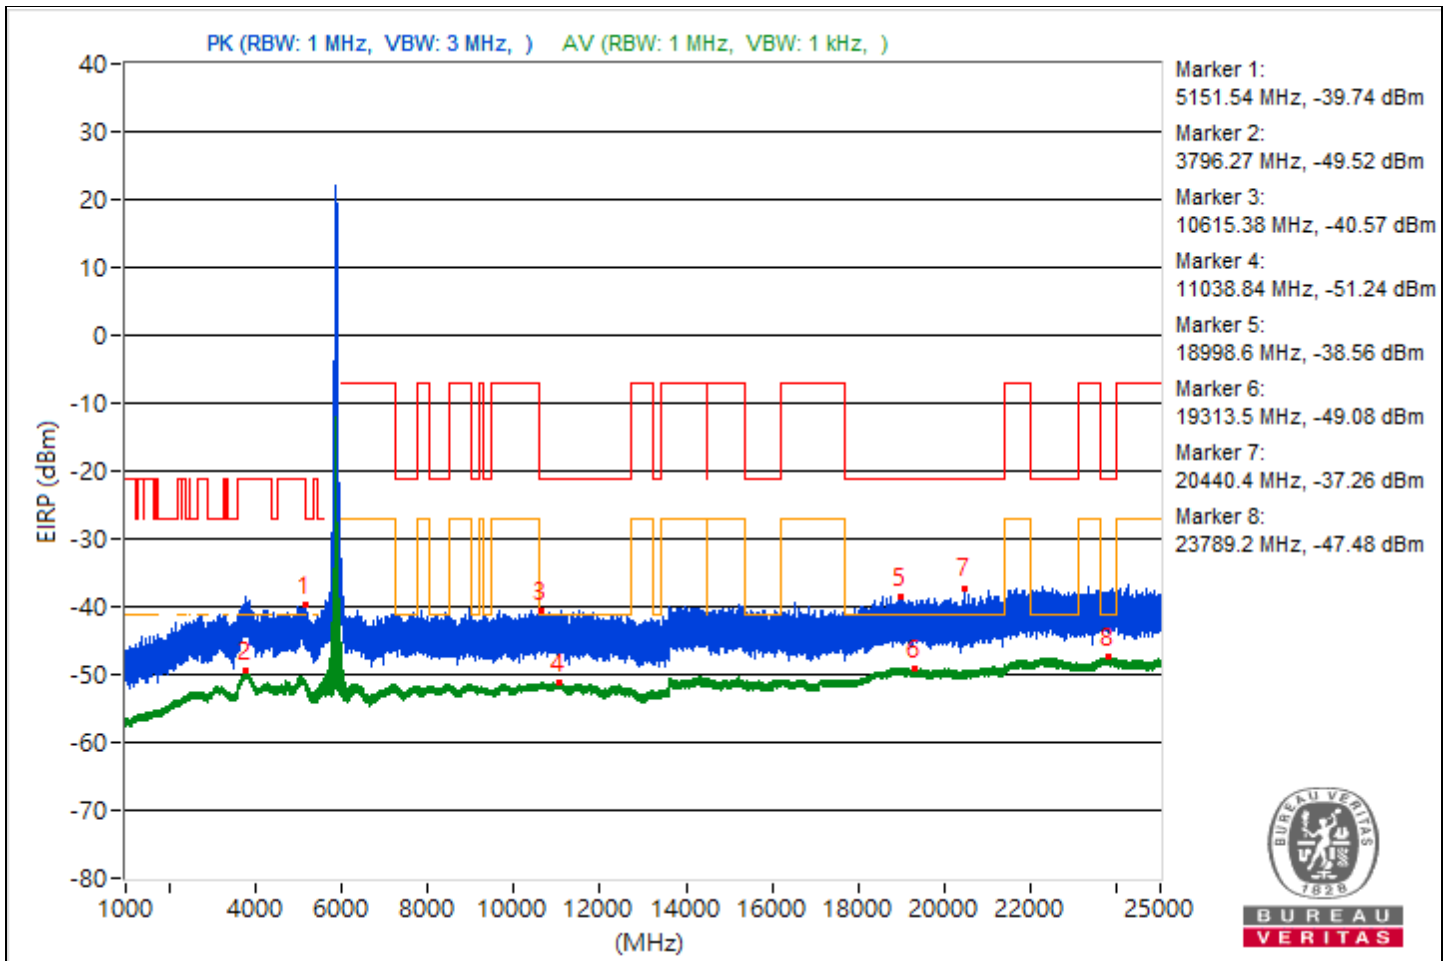

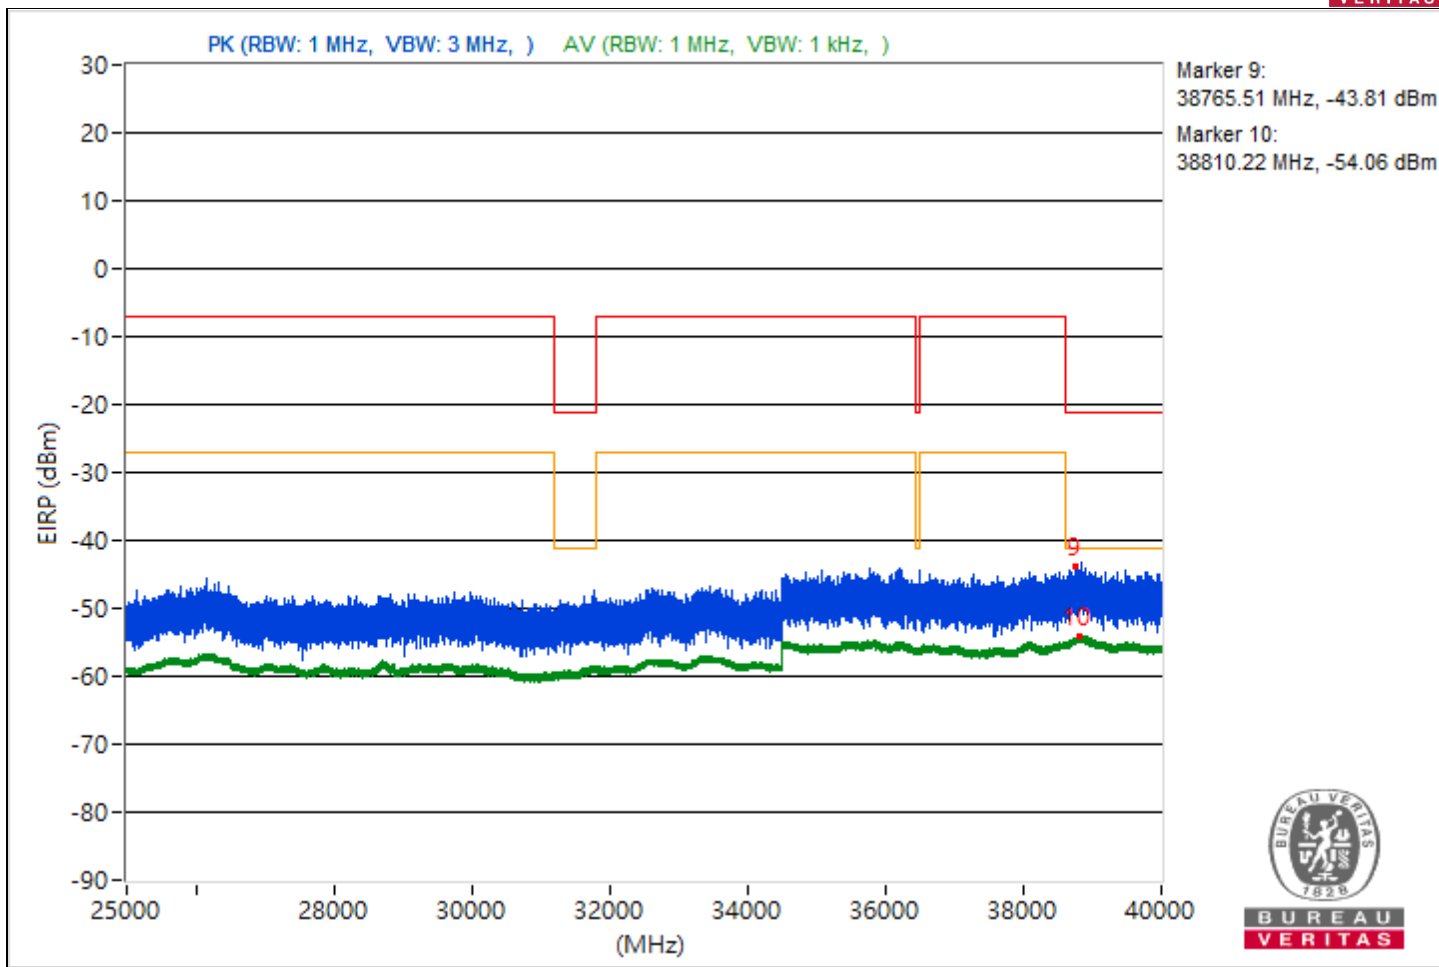



RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5582.12	55 PK	68.26	-13.26	-46.34	-51.47	4.92	-40.26
2	3818.9	45.37 AV	54	-8.63	-57.49	-58.18	4.92	-49.89
3	11066.76	54.41 PK	74	-19.59	-46.99	-51.87	4.92	-40.85
4	10621.6	44.05 AV	54	-9.95	-58.82	-59.48	4.92	-51.21
5	18877.9	57.33 PK	74	-16.67	-47.63	-44.61	4.92	-37.93
6	19171.9	46.13 AV	54	-7.87	-57.43	-56.72	4.92	-49.13
7	22523.6	58.6 PK	74	-15.4	-42.58	-48.44	4.92	-36.66
8	22207.8	47.57 AV	54	-6.43	-55.97	-55.29	4.92	-47.69
9	38760.36	51.15 PK	74	-22.85	-56.93	-49.8	4.92	-44.11
10	38835.56	41.28 AV	54	-12.72	-61.7	-62.14	4.92	-53.98

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

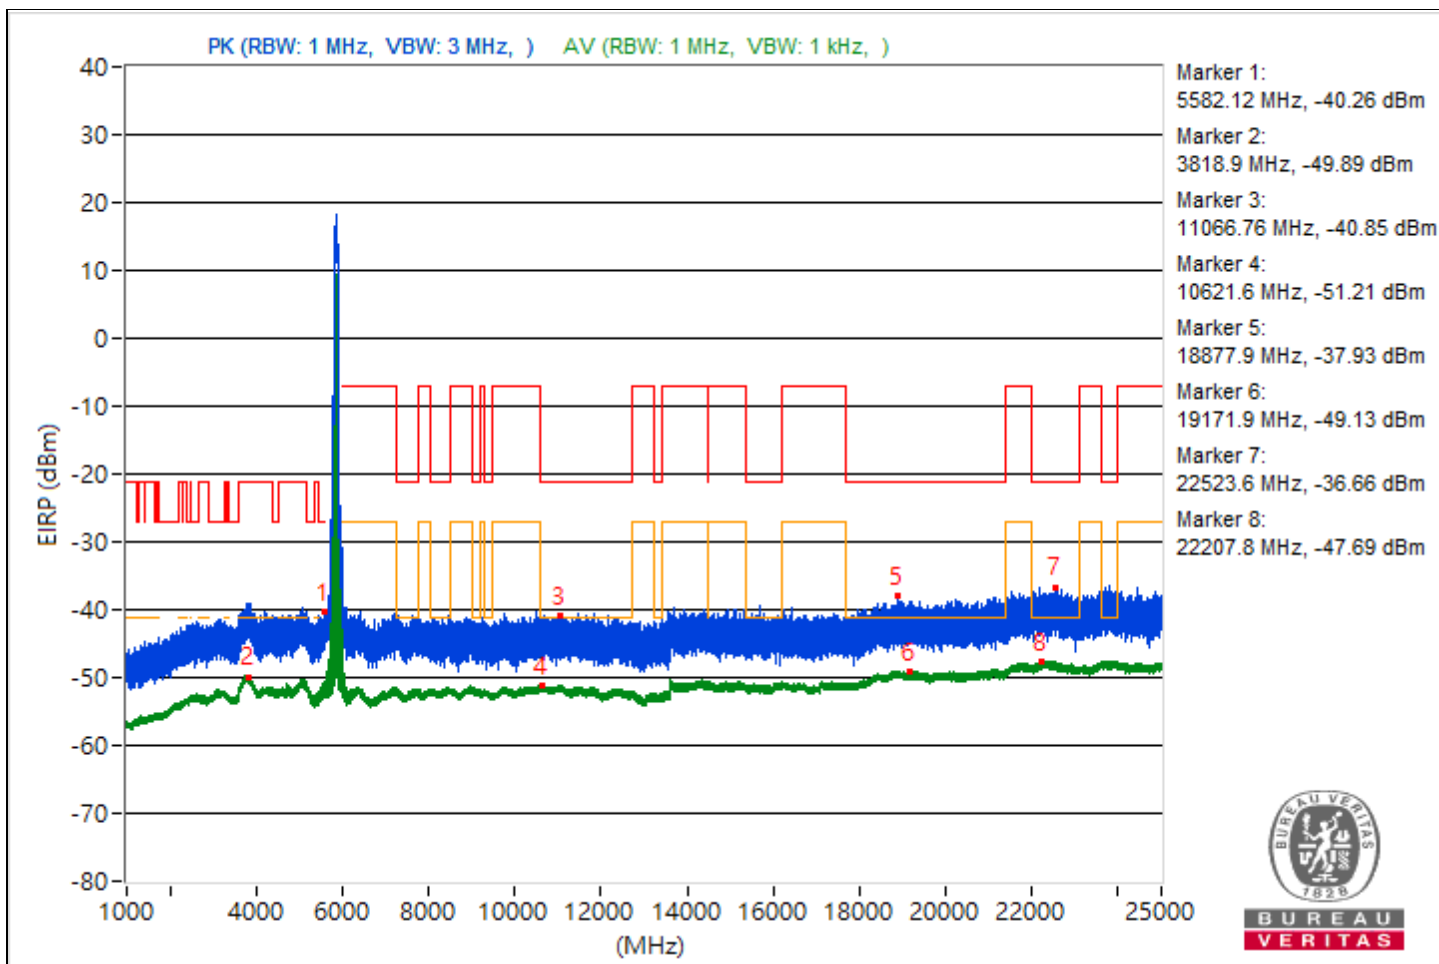

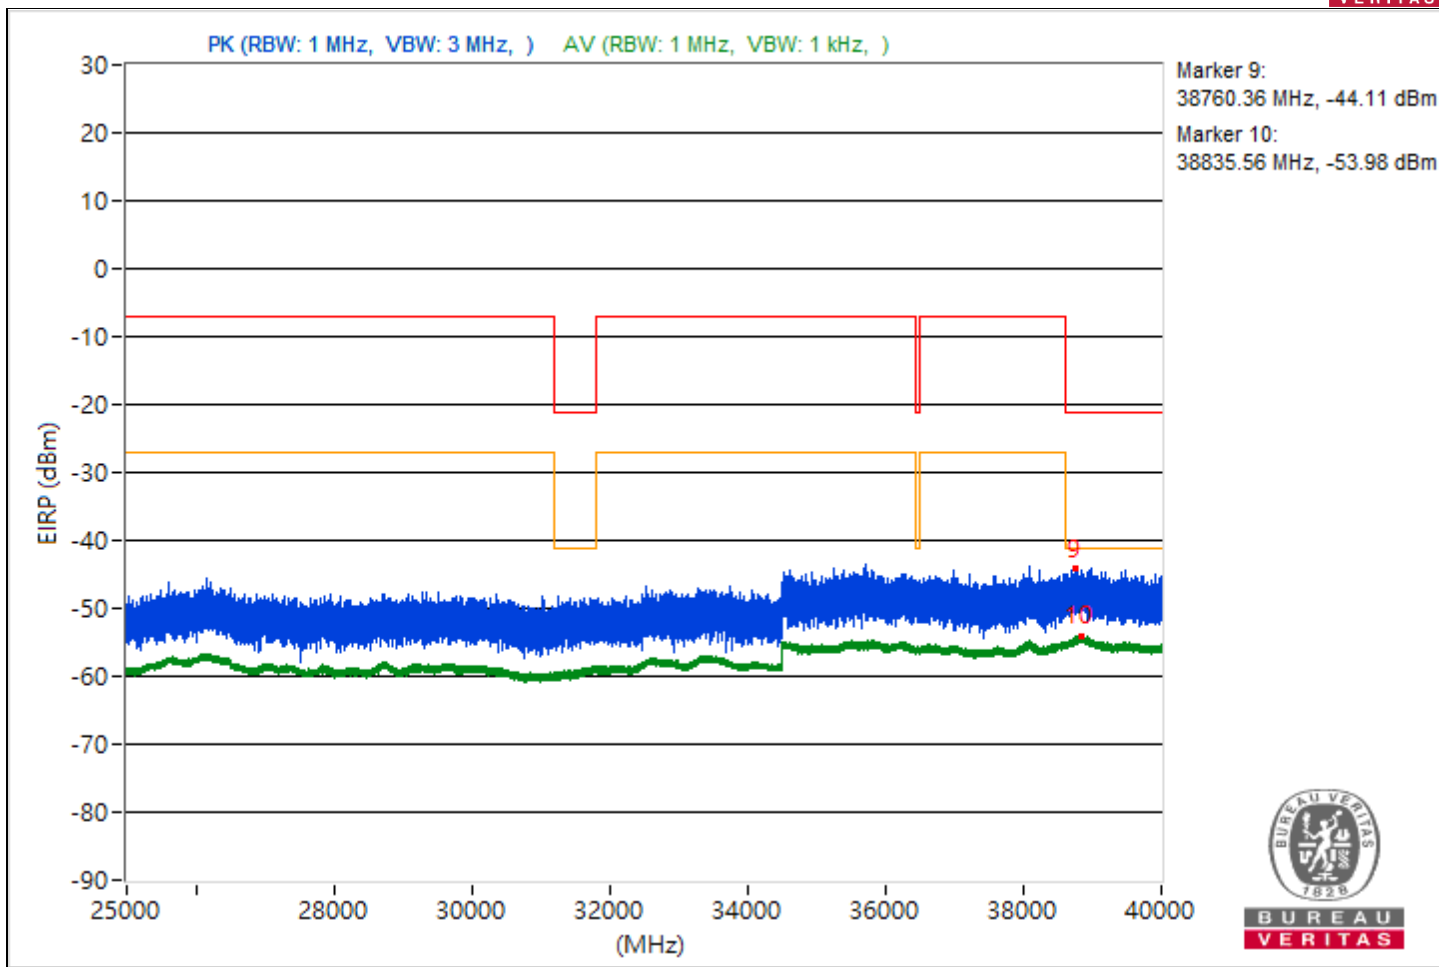



RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5597.21	59.18 PK	68.26	-9.08	-41.84	-48.59	4.92	-36.08
2	4652.13	45.44 AV	54	-8.56	-56.25	-60.06	4.92	-49.82
3	11776.44	55.29 PK	74	-18.71	-50.16	-46.42	4.92	-39.97
4	11462.04	44.12 AV	54	-9.88	-58.71	-59.46	4.92	-51.14
5	19031.3	56.81 PK	74	-17.19	-48.68	-44.88	4.92	-38.45
6	18864.9	46.17 AV	54	-7.83	-57.35	-56.71	4.92	-49.09
7	22255.4	57.8 PK	74	-16.2	-43.26	-49.78	4.92	-37.46
8	22364.7	47.69 AV	54	-6.31	-55.1	-55.93	4.92	-47.57
9	38892.44	51.64 PK	74	-22.36	-54.48	-49.81	4.92	-43.62
10	38795.73	41.12 AV	54	-12.88	-61.56	-62.65	4.92	-54.14

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

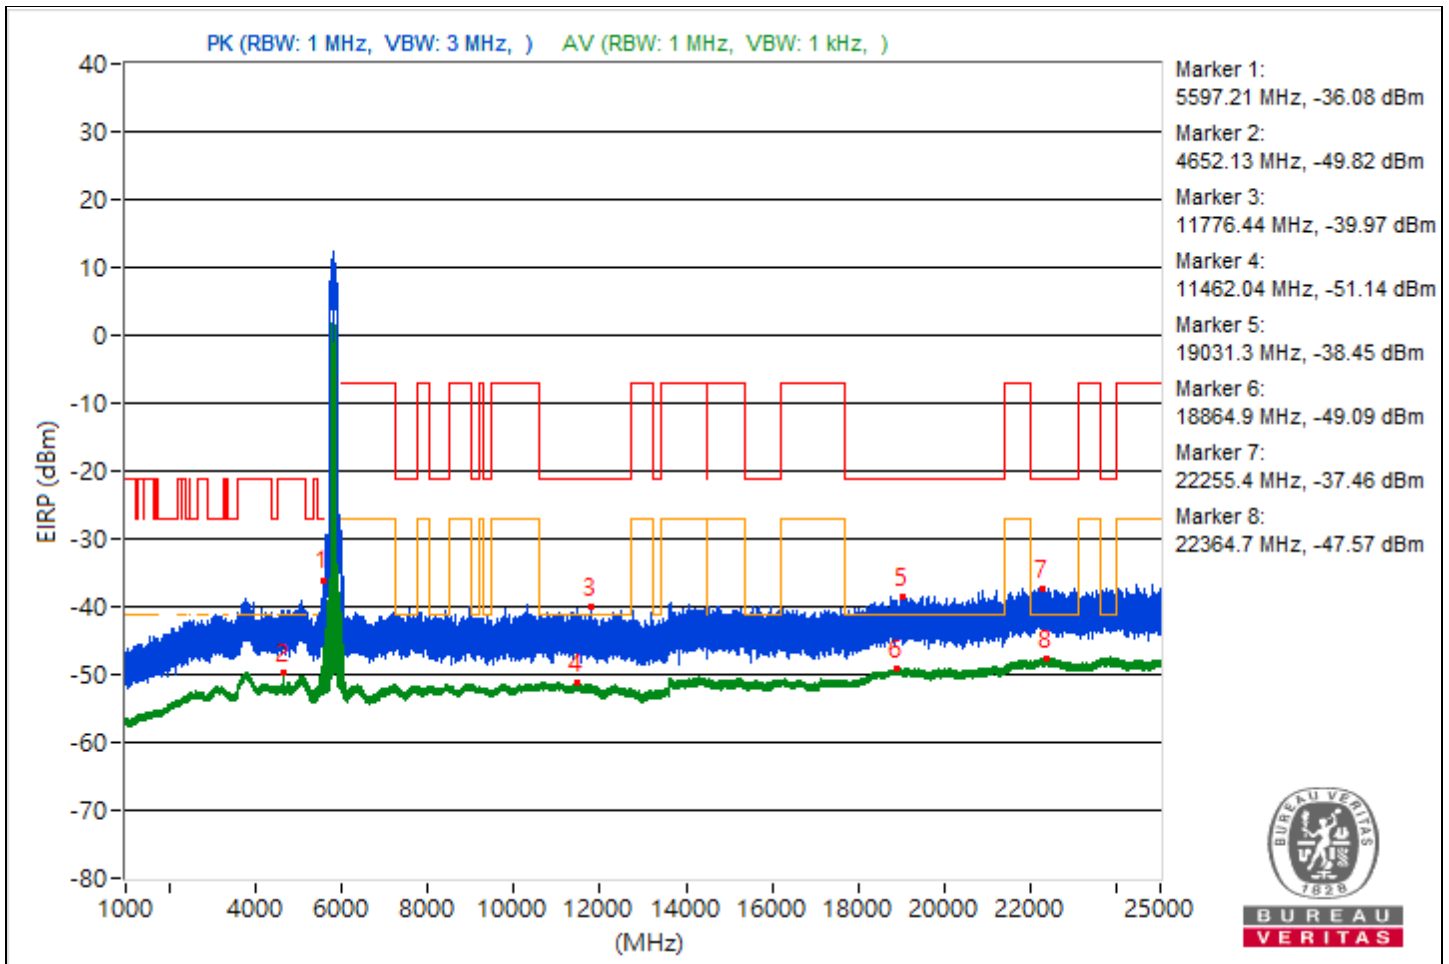

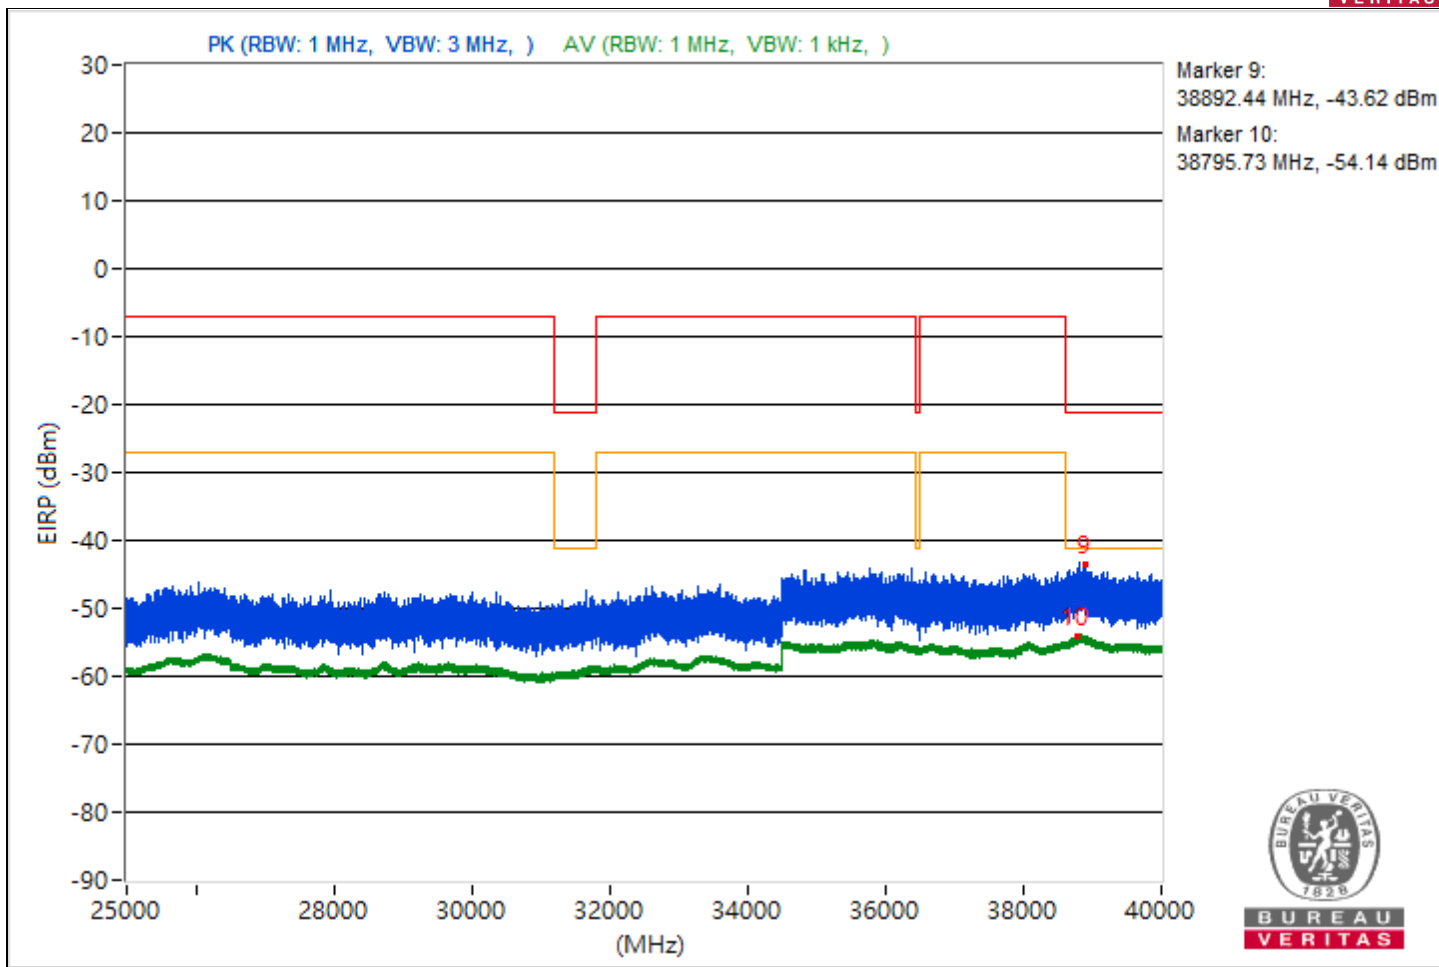



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5154.27	55.15 PK	68.26	-13.11	-46.42	-50.67	4.92	-40.11
2	3780.32	45.68 AV	54	-8.32	-56.98	-58.12	4.92	-49.58
3	12351.56	54.31 PK	74	-19.69	-52.47	-46.95	4.92	-40.95
4	10646.84	44.04 AV	54	-9.96	-60	-58.44	4.92	-51.22
5	19113.7	56.63 PK	74	-17.37	-50.25	-44.59	4.92	-38.63
6	19230.6	46.46 AV	54	-7.54	-56.13	-57.42	4.92	-48.8
7	22050.6	59.11 PK	74	-14.89	-41.91	-48.64	4.92	-36.15
8	23733.3	47.72 AV	54	-6.28	-56.08	-54.94	4.92	-47.54
9	39007.2	50.83 PK	74	-23.17	-50.41	-55.97	4.92	-44.43
10	38841.6	41.2 AV	54	-12.8	-61.31	-62.79	4.92	-54.06

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

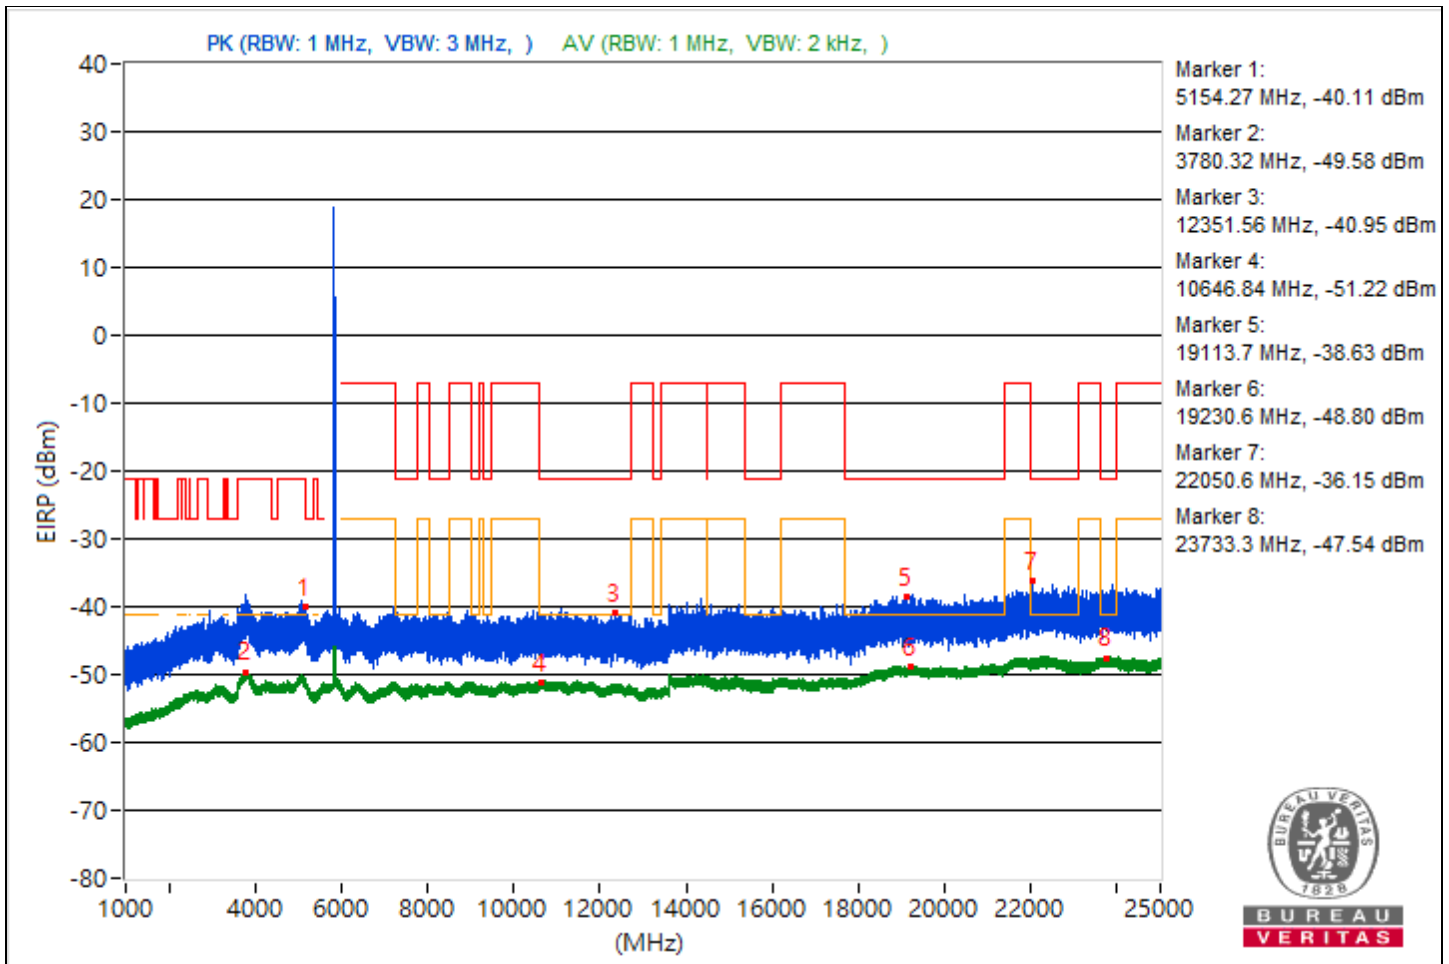

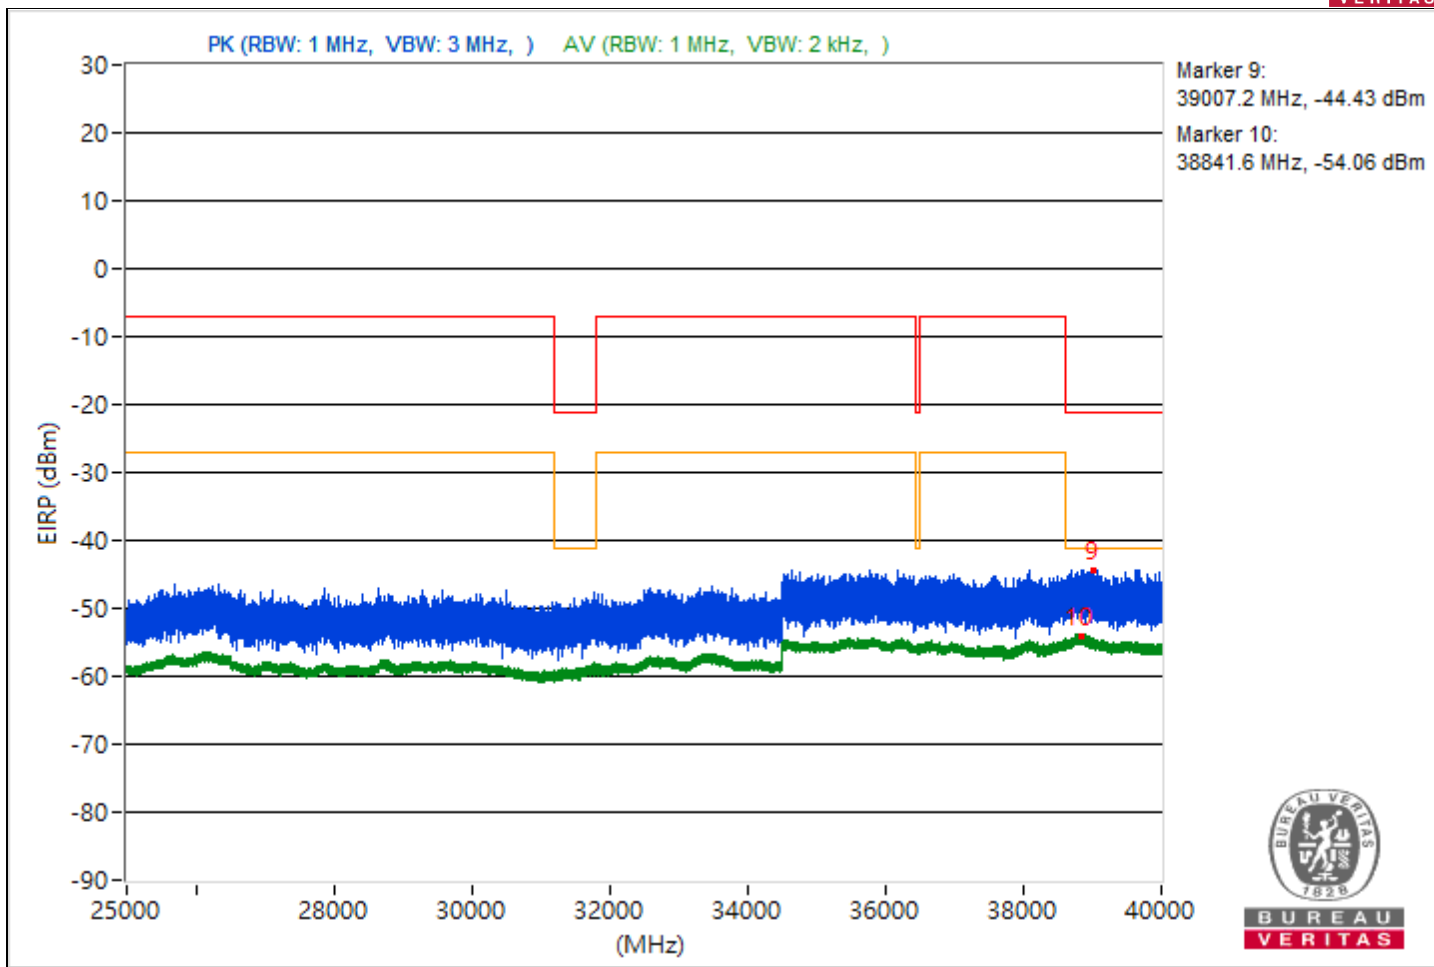



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5480.7	53.75 PK	68.26	-14.51	-47.18	-54.45	4.92	-41.51
2	3794.4	45.65 AV	54	-8.35	-57.21	-57.9	4.92	-49.61
3	7689.28	54.71 PK	74	-19.29	-52.04	-46.55	4.92	-40.55
4	10689.6	44.43 AV	54	-9.57	-59.32	-58.27	4.92	-50.83
5	18635.3	56.8 PK	74	-17.2	-44.47	-49.91	4.92	-38.46
6	19175	46.44 AV	54	-7.56	-56.28	-57.29	4.92	-48.82
7	23924.7	57.72 PK	74	-16.28	-43.62	-48.78	4.92	-37.54
8	22231.9	48.03 AV	54	-5.97	-55.42	-54.92	4.92	-47.23
9	38841.96	51.2 PK	74	-22.8	-54.76	-50.31	4.92	-44.06
10	38795.2	41.27 AV	54	-12.73	-62.54	-61.38	4.92	-53.99

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

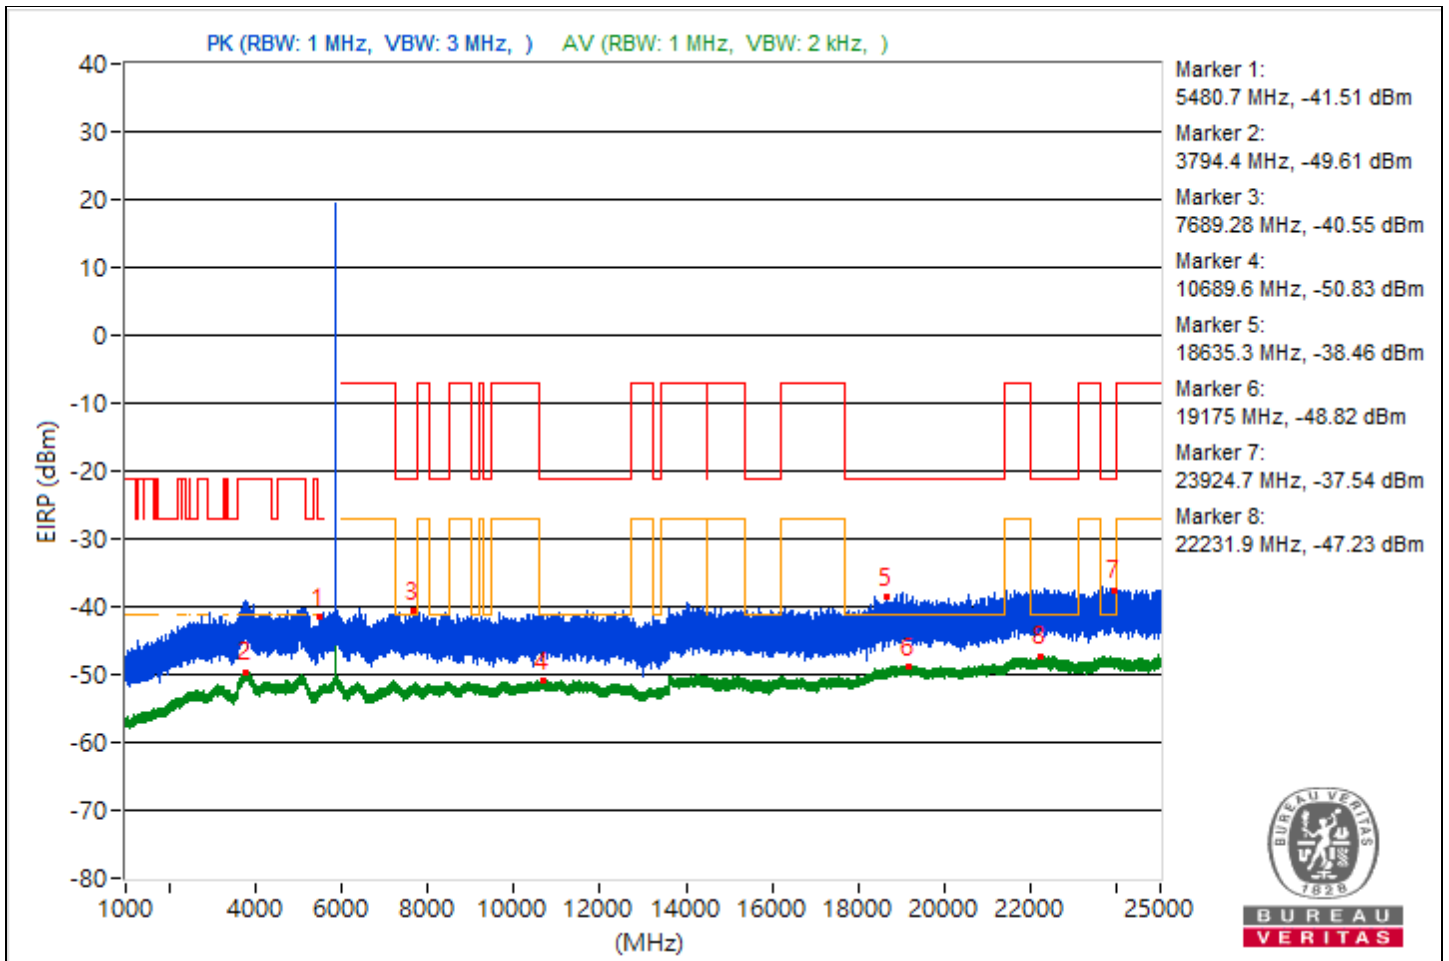

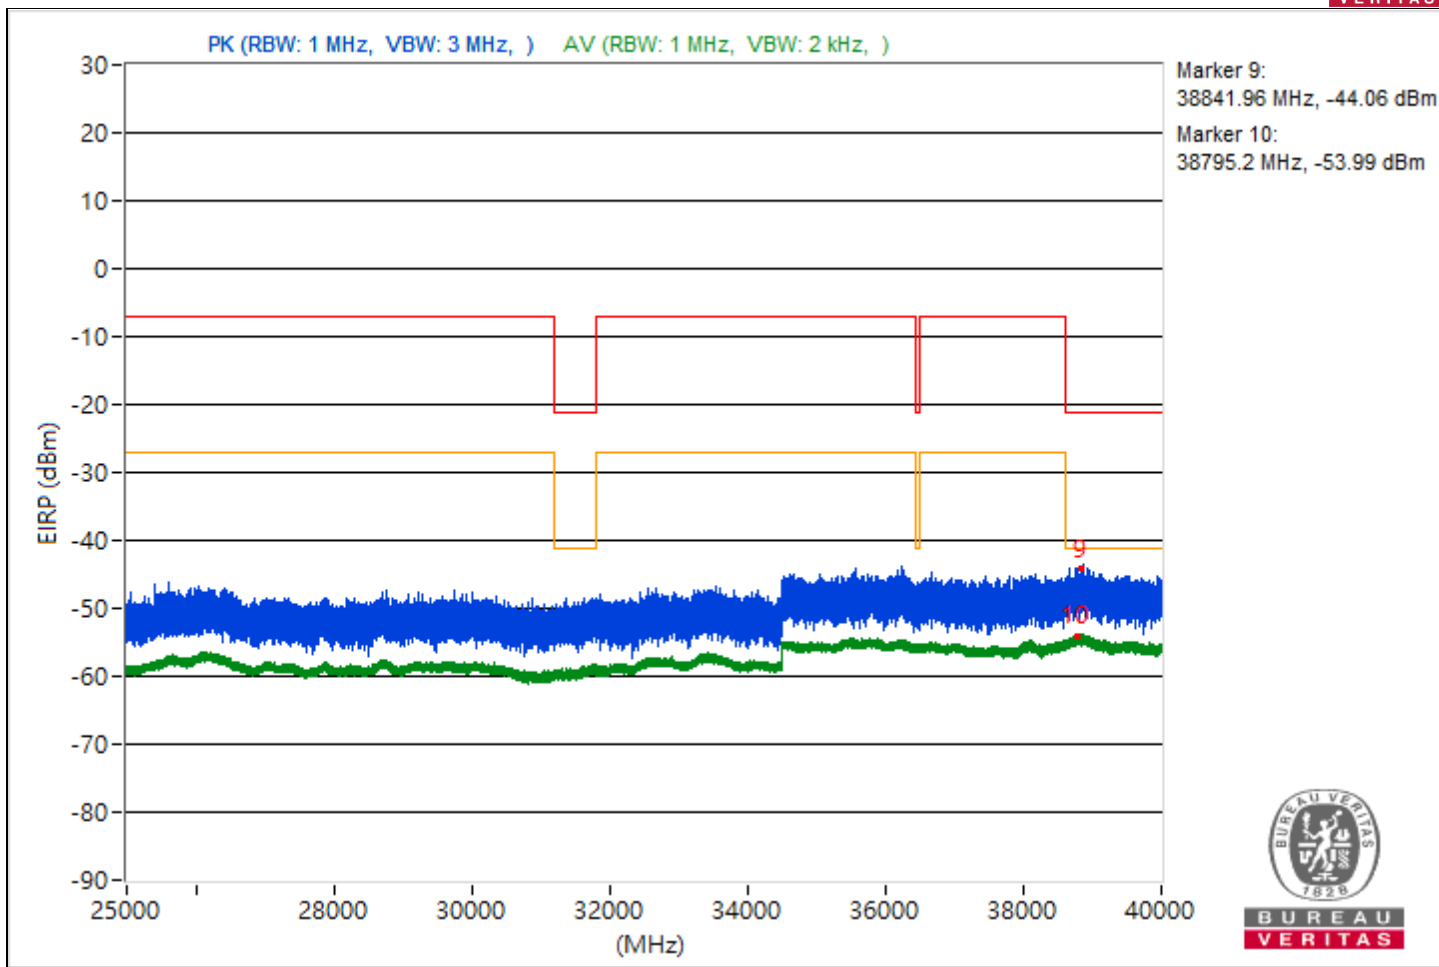





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5163.44	54.64 PK	68.26	-13.62	-47.18	-50.56	4.92	-40.62
2	3819.13	45.76 AV	54	-8.24	-57.01	-57.89	4.92	-49.5
3	10709.96	54.43 PK	74	-19.57	-51.45	-47.12	4.92	-40.83
4	11019.91	44.35 AV	54	-9.65	-58.5	-59.21	4.92	-50.91
5	19988.4	57.27 PK	74	-16.73	-44.45	-48.16	4.92	-37.99
6	18880.3	46.22 AV	54	-7.78	-56.37	-57.67	4.92	-49.04
7	22506.4	58.17 PK	74	-15.83	-47.59	-43.42	4.92	-37.09
8	23650	47.95 AV	54	-6.05	-54.75	-55.79	4.92	-47.31
9	38862.76	50.72 PK	74	-23.28	-50.56	-55.98	4.92	-44.54
10	38813.16	41.32 AV	54	-12.68	-61.44	-62.34	4.92	-53.94

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

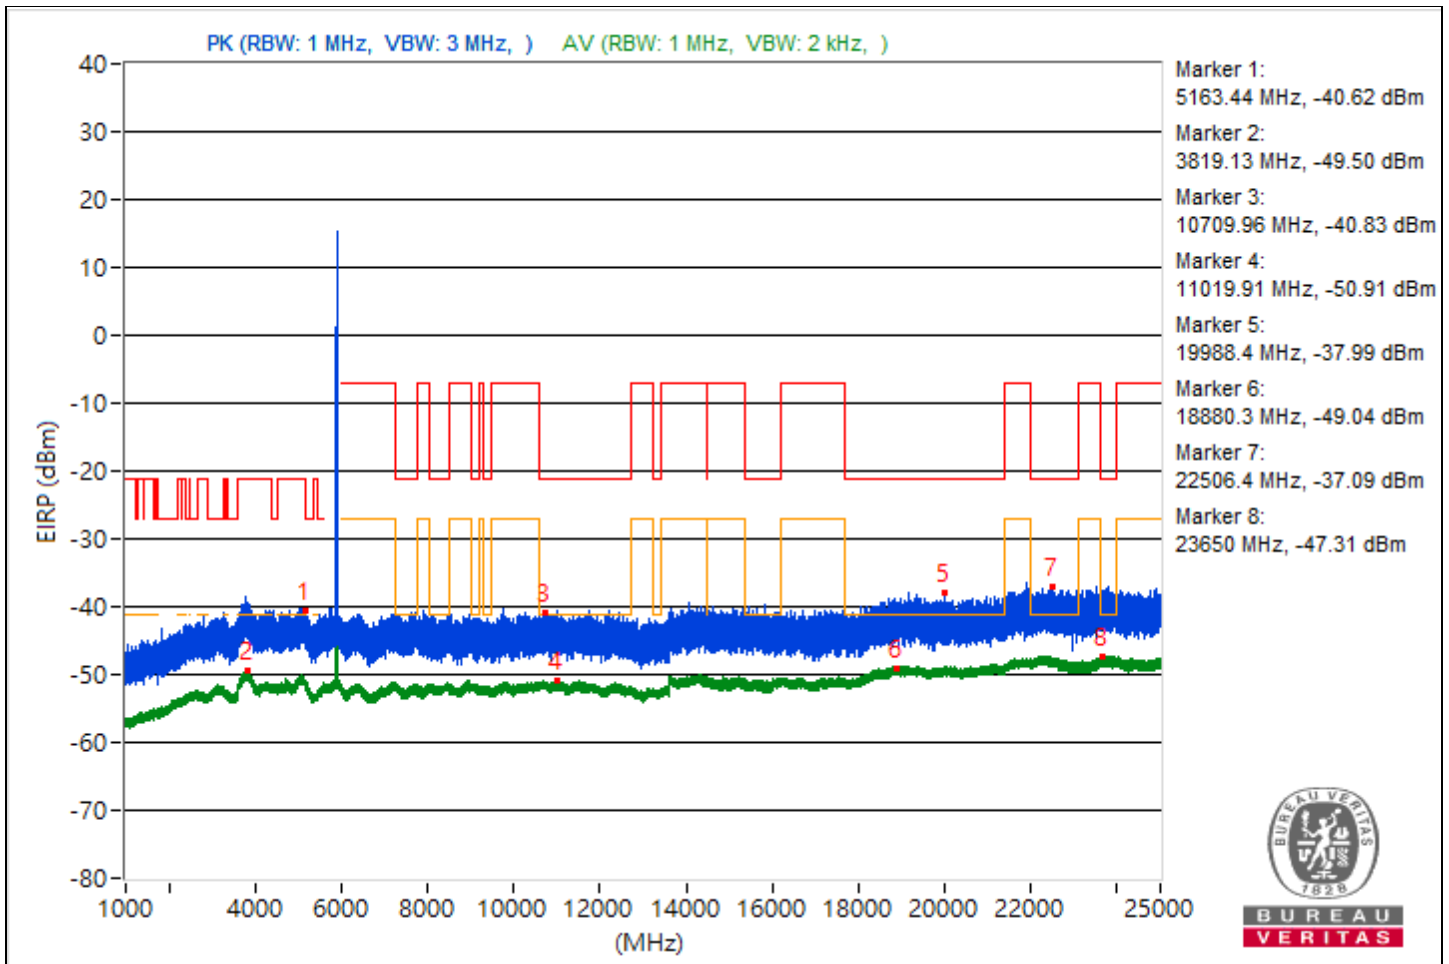

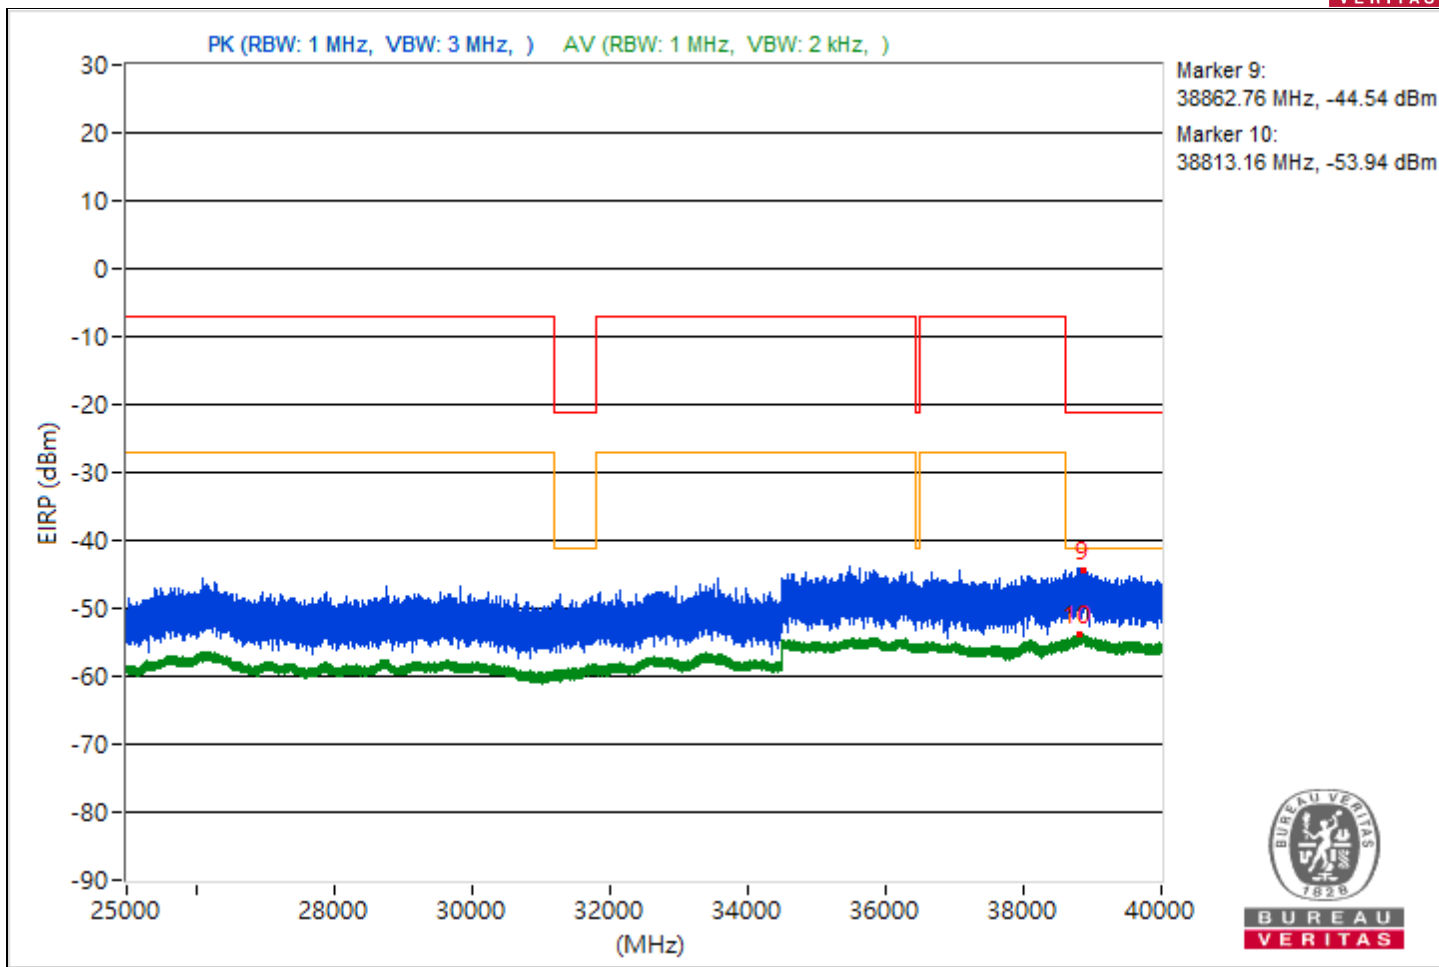





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5184.91	55.13 PK	68.26	-13.13	-46.47	-50.6	4.92	-40.13
2	4675.93	46.19 AV	54	-7.81	-57.19	-56.81	4.92	-49.07
3	11792.89	54.82 PK	74	-19.18	-52.7	-46.24	4.92	-40.44
4	11046.13	44.21 AV	54	-9.79	-58.53	-59.49	4.92	-51.05
5	19163.5	57.45 PK	74	-16.55	-44.7	-47.09	4.92	-37.81
6	19422.6	46.51 AV	54	-7.49	-55.89	-57.64	4.92	-48.75
7	23672	58.44 PK	74	-15.56	-47.83	-42.97	4.92	-36.82
8	22384.6	48.04 AV	54	-5.96	-55.64	-54.72	4.92	-47.22
9	38884.18	51.33 PK	74	-22.67	-49.88	-55.61	4.92	-43.93
10	38805.87	41.34 AV	54	-12.66	-61.39	-62.38	4.92	-53.92

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

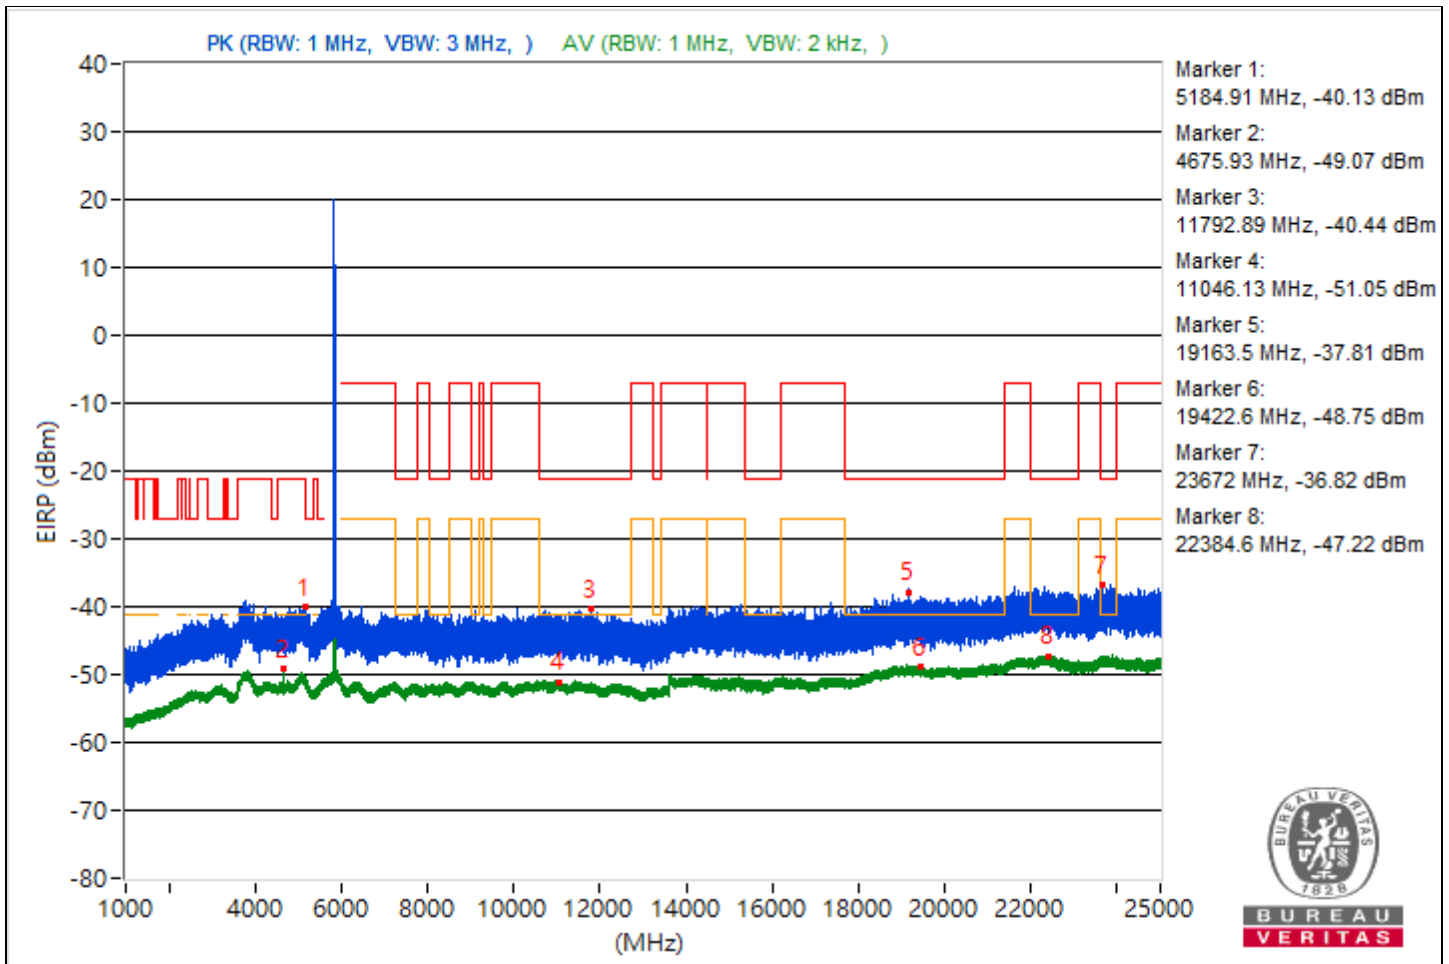

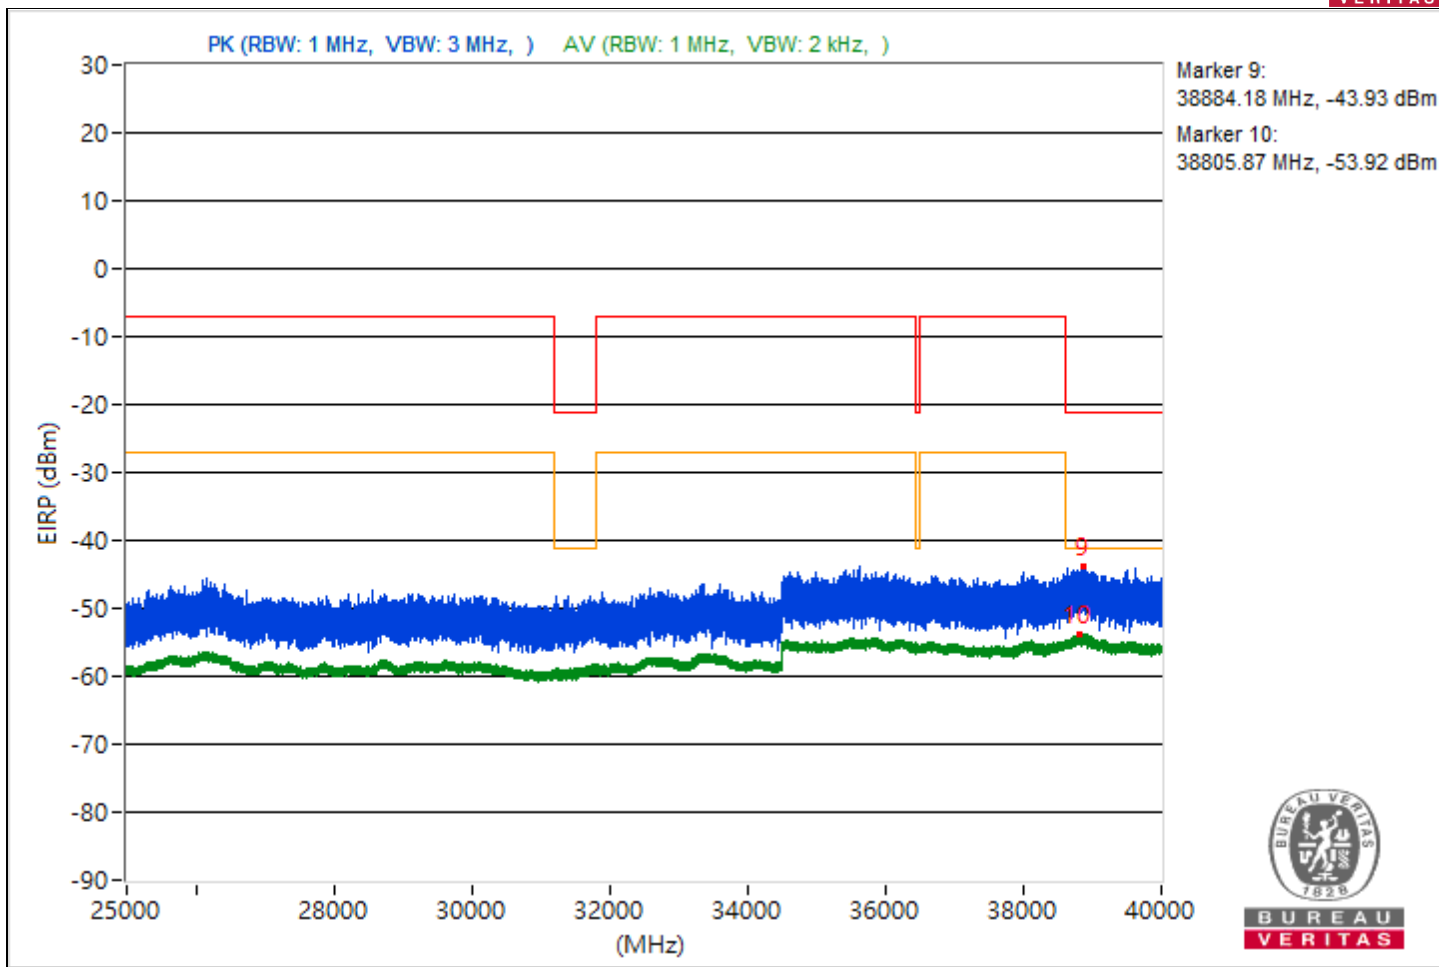



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5504.5	54.36 PK	68.26	-13.9	-47.17	-51.57	4.92	-40.9
2	4692.03	46.59 AV	54	-7.41	-56.45	-56.76	4.92	-48.67
3	8415.38	54.59 PK	74	-19.41	-46.61	-52.37	4.92	-40.67
4	11489.6	44.28 AV	54	-9.72	-59.62	-58.3	4.92	-50.98
5	19075.8	56.38 PK	74	-17.62	-50.07	-44.97	4.92	-38.88
6	19299.9	46.36 AV	54	-7.64	-57.33	-56.39	4.92	-48.9
7	22256.3	58.41 PK	74	-15.59	-48.09	-42.93	4.92	-36.85
8	23823.6	47.99 AV	54	-6.01	-54.89	-55.54	4.92	-47.27
9	38838.04	51.71 PK	74	-22.29	-49.26	-56.26	4.92	-43.55
10	38837.78	41.53 AV	54	-12.47	-61.89	-61.44	4.92	-53.73

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

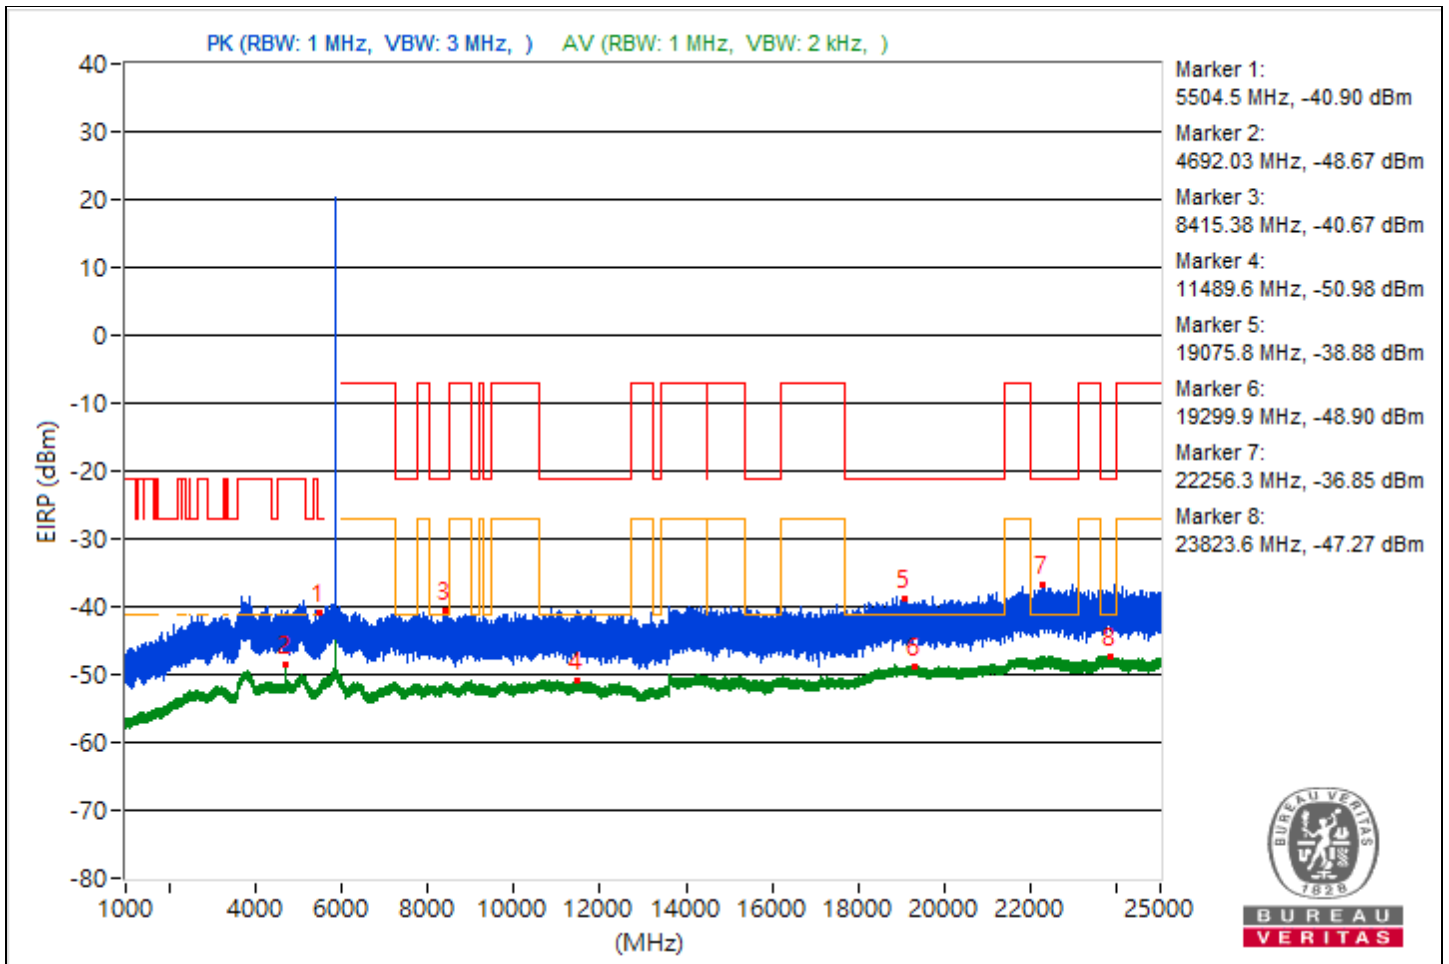

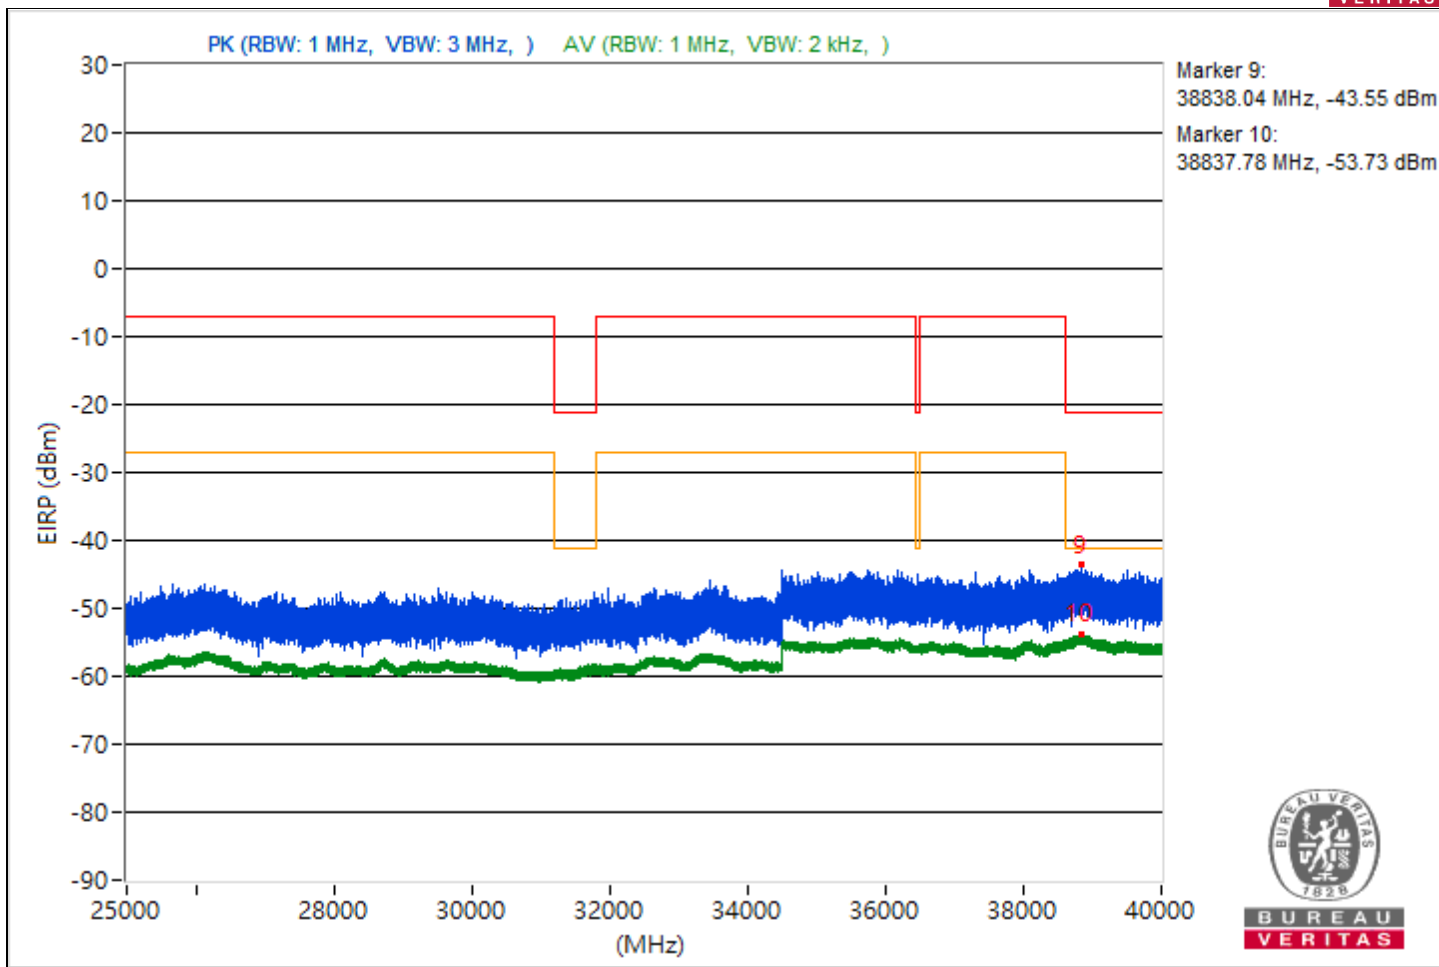



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5156.91	55.03 PK	68.26	-13.23	-49.94	-46.9	4.92	-40.23
2	3800.93	45.62 AV	54	-8.38	-58.15	-57.05	4.92	-49.64
3	12321.24	54.48 PK	74	-19.52	-46.71	-52.5	4.92	-40.78
4	10922.93	44.08 AV	54	-9.92	-59.91	-58.44	4.92	-51.18
5	19170.5	57.08 PK	74	-16.92	-45.16	-47.31	4.92	-38.18
6	18990	46.33 AV	54	-7.67	-57.52	-56.28	4.92	-48.93
7	22497	58.37 PK	74	-15.63	-43.54	-46.66	4.92	-36.89
8	22345	48.08 AV	54	-5.92	-54.91	-55.32	4.92	-47.18
9	38893.07	51.51 PK	74	-22.49	-55.39	-49.71	4.92	-43.75
10	38852.09	41.3 AV	54	-12.7	-62.63	-61.25	4.92	-53.96

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

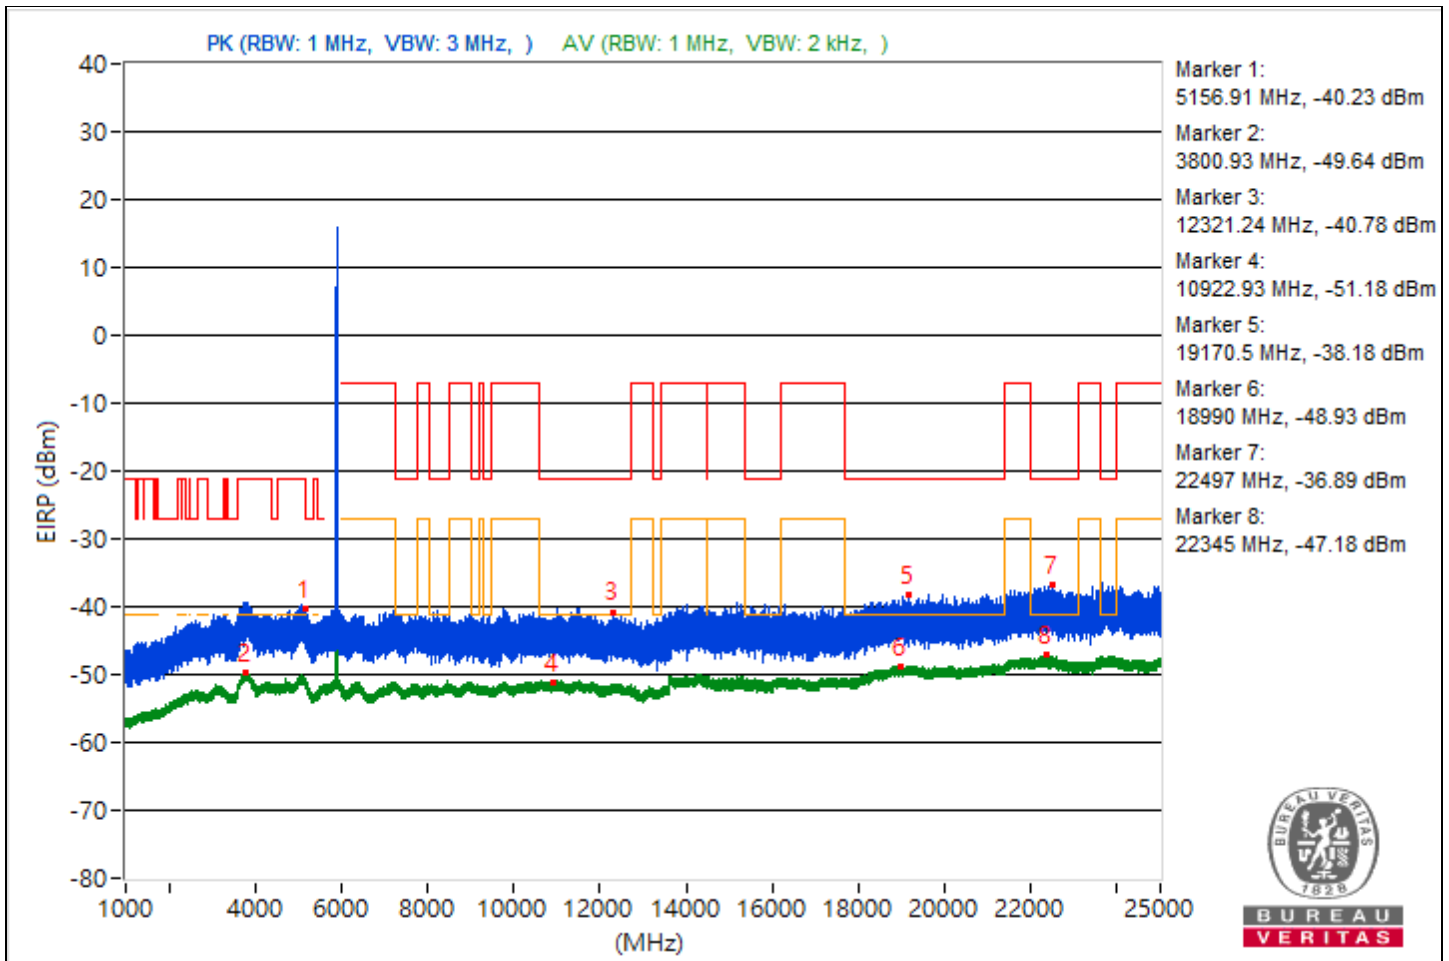

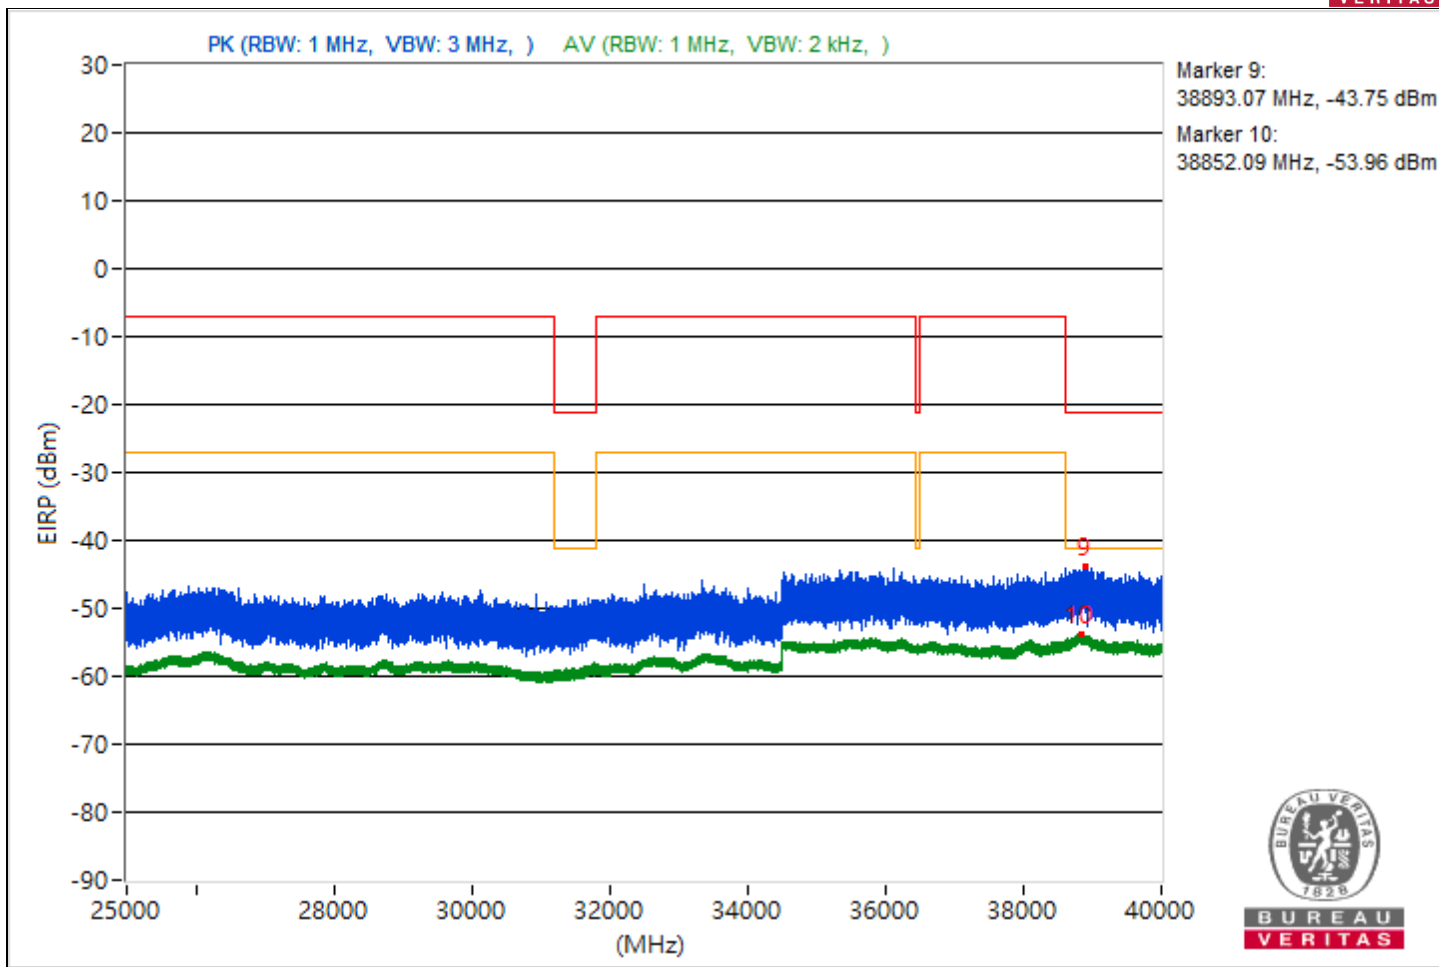



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5189.19	55.14 PK	68.26	-13.12	-50.85	-46.37	4.92	-40.12
2	3781.02	45.71 AV	54	-8.29	-58.37	-56.73	4.92	-49.55
3	10752.98	54.48 PK	74	-19.52	-46.74	-52.43	4.92	-40.78
4	10807.38	44.23 AV	54	-9.77	-58.44	-59.54	4.92	-51.03
5	19250.7	56.69 PK	74	-17.31	-49.71	-44.68	4.92	-38.57
6	19170.7	46.43 AV	54	-7.57	-57.31	-56.28	4.92	-48.83
7	22319.6	58.15 PK	74	-15.85	-47.12	-43.65	4.92	-37.11
8	23654.7	48.05 AV	54	-5.95	-55.64	-54.69	4.92	-47.21
9	38793.16	50.66 PK	74	-23.34	-50.6	-56.09	4.92	-44.6
10	38881.24	41.35 AV	54	-12.65	-62.2	-61.5	4.92	-53.91

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

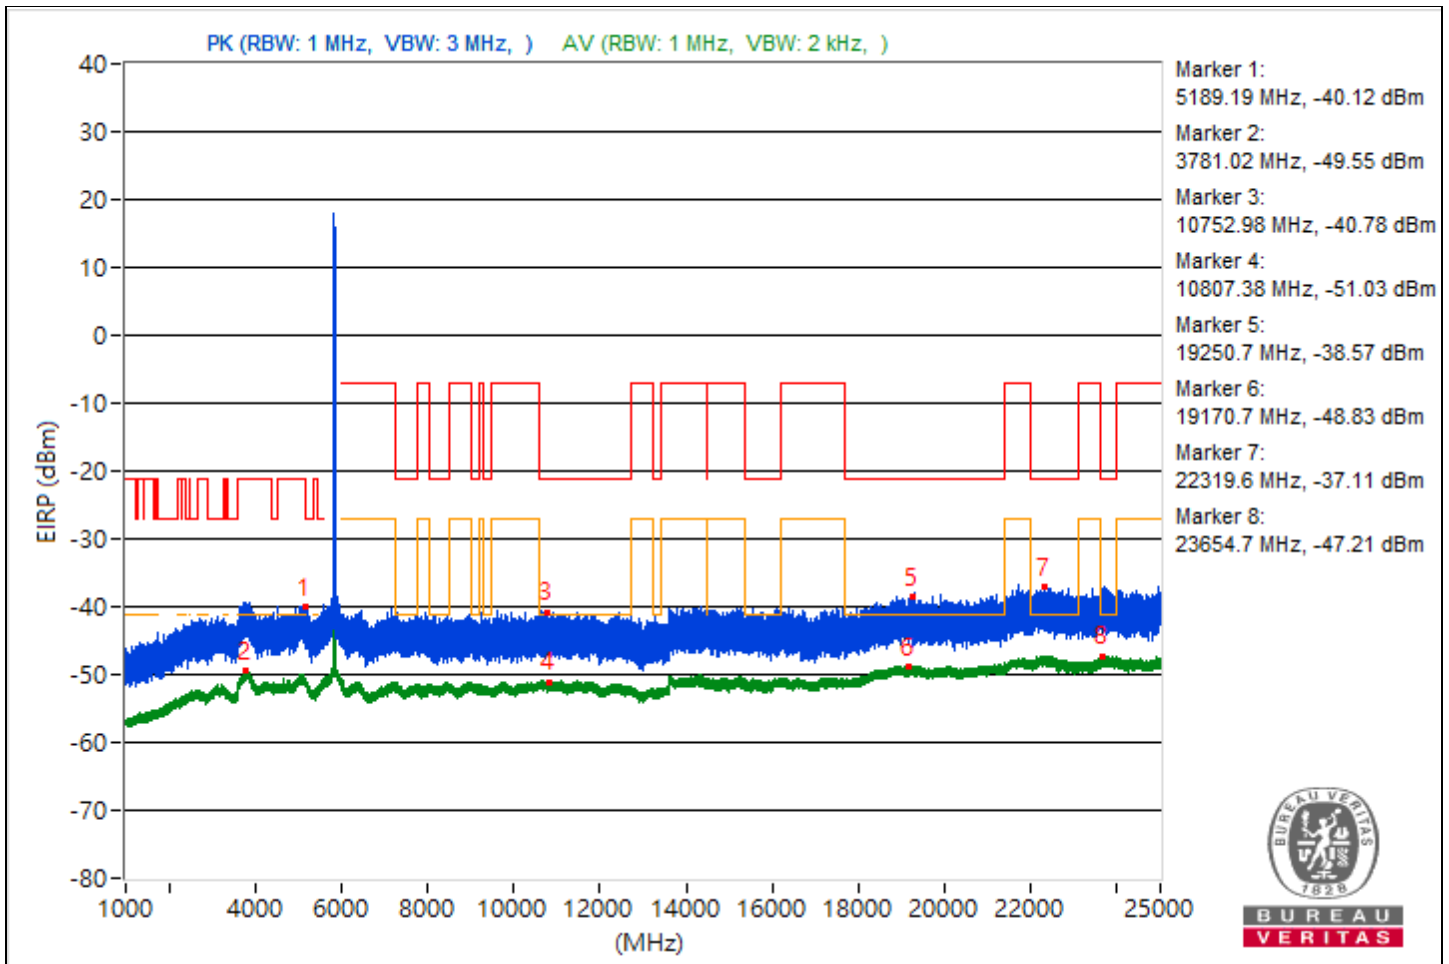

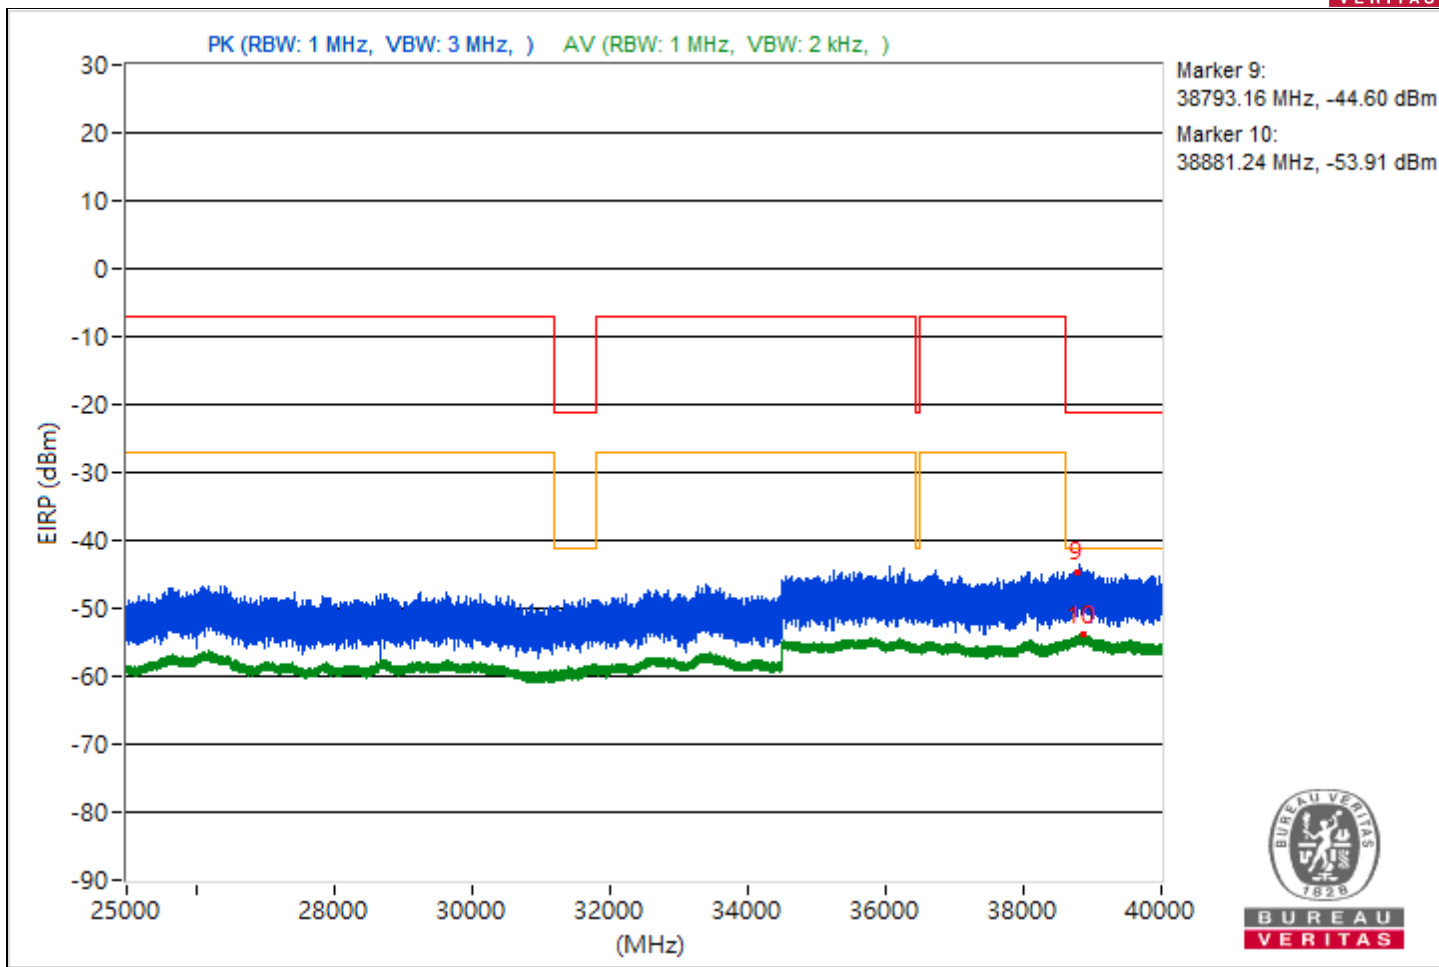



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5170.6	54.11 PK	68.26	-14.15	-52.23	-47.27	4.92	-41.15
2	4691.96	46.45 AV	54	-7.55	-56.37	-57.15	4.92	-48.81
3	12432.62	54.64 PK	74	-19.36	-51.61	-46.77	4.92	-40.62
4	10692.98	44.27 AV	54	-9.73	-59.39	-58.5	4.92	-50.99
5	19182.3	56.9 PK	74	-17.1	-44.99	-48.14	4.92	-38.36
6	19105.7	46.49 AV	54	-7.51	-57.03	-56.4	4.92	-48.77
7	22735	59.24 PK	74	-14.76	-45.54	-42.79	4.92	-36.02
8	22412.1	47.99 AV	54	-6.01	-55.67	-54.78	4.92	-47.27
9	38813.42	52.1 PK	74	-21.9	-54.31	-49.27	4.92	-43.16
10	38846.4	41.15 AV	54	-12.85	-62.72	-61.46	4.92	-54.11

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

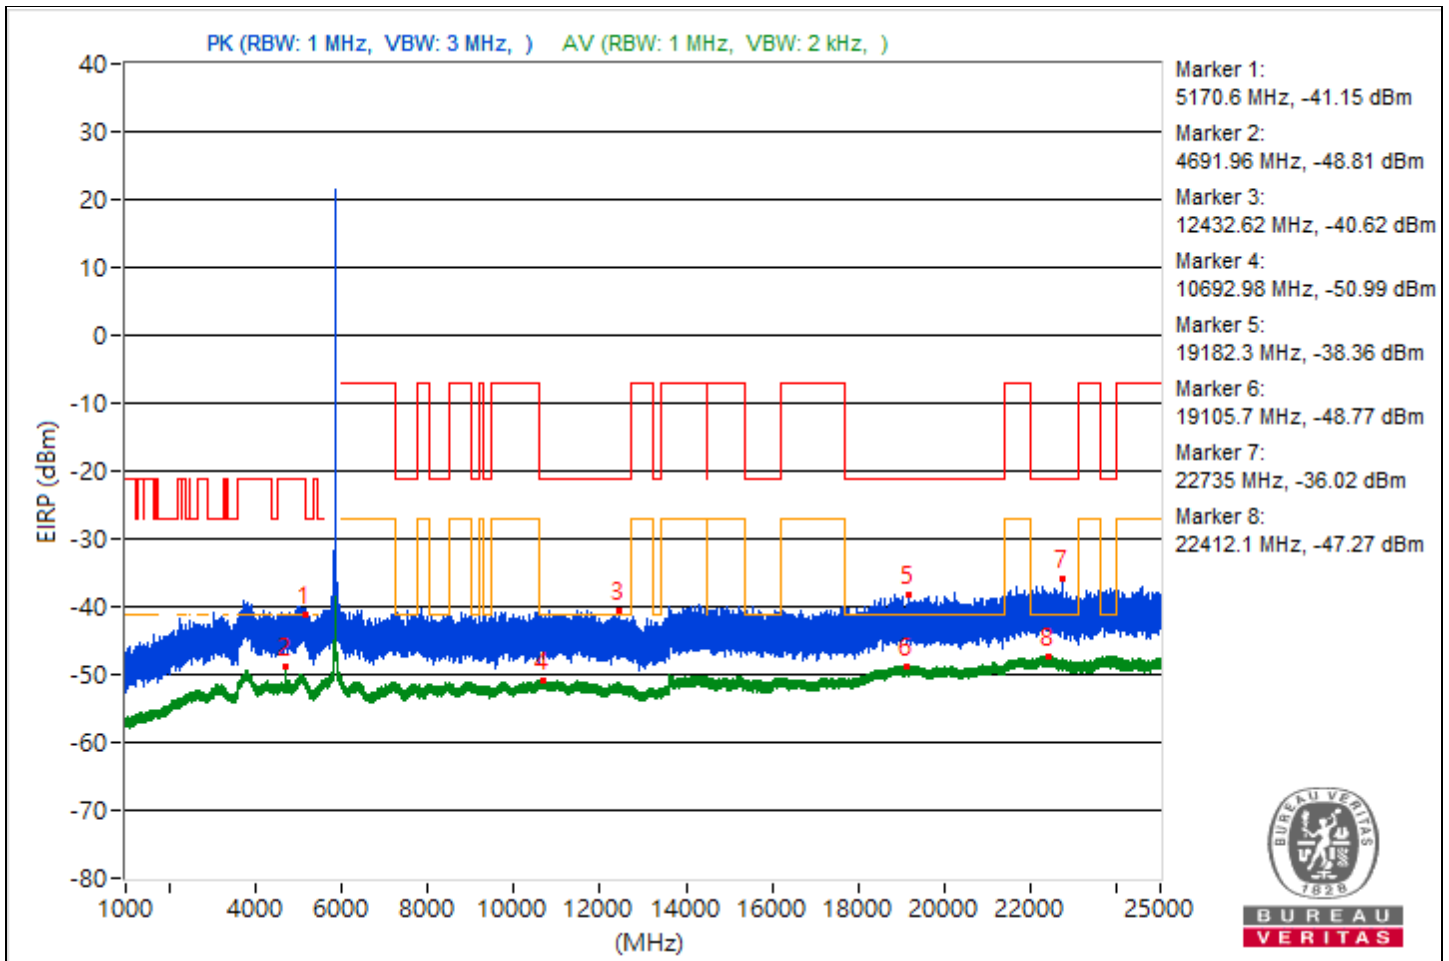

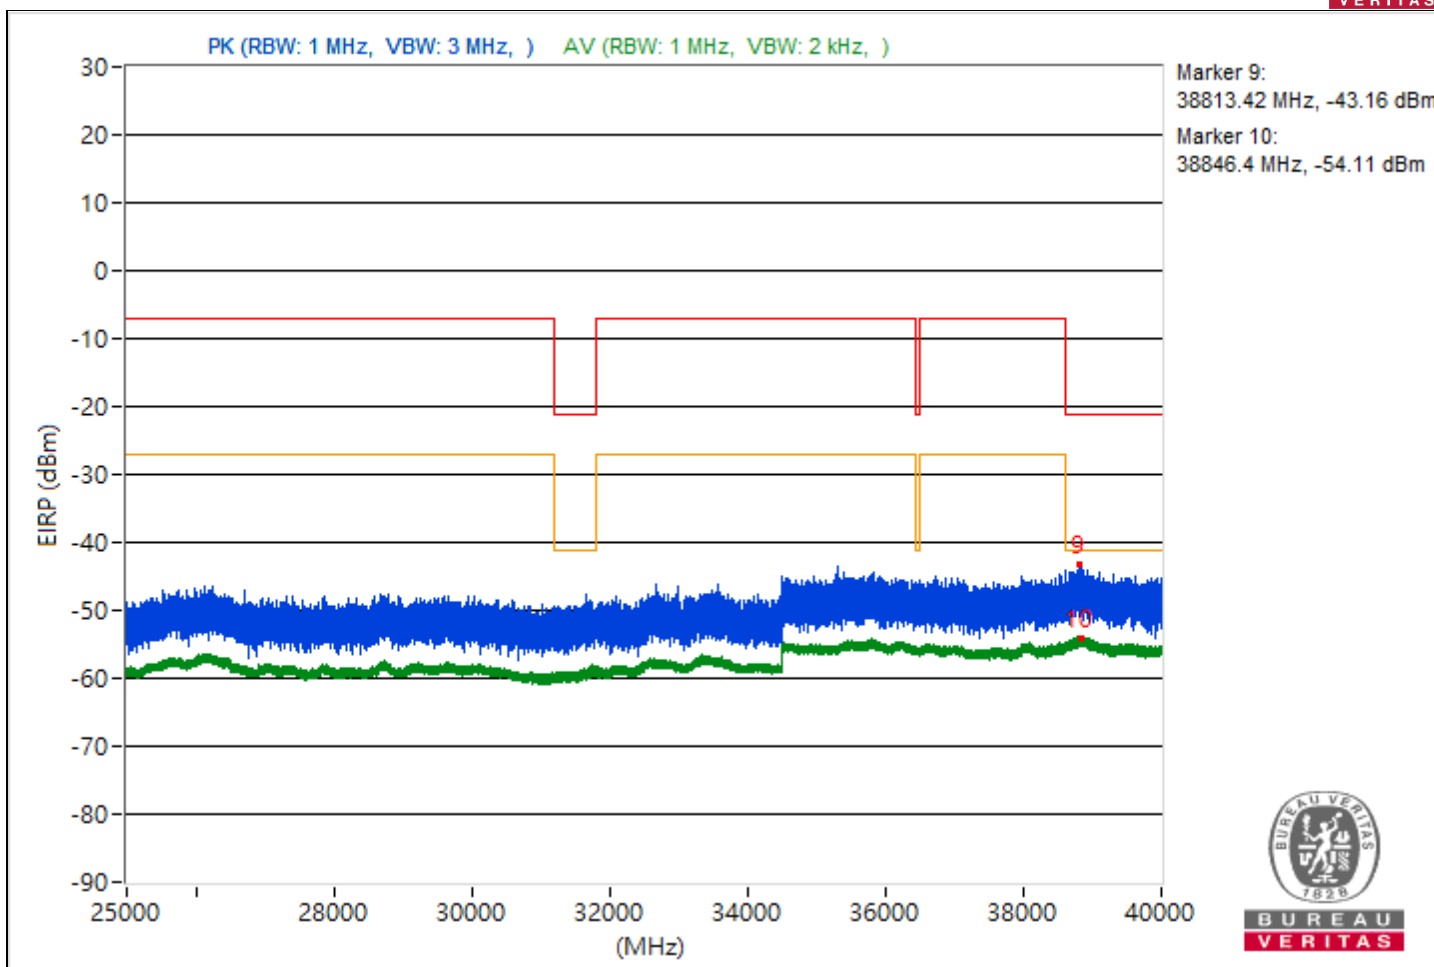



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3068.89	54.19 PK	68.26	-14.07	-51.2	-47.54	4.92	-41.07
2	3793.93	45.87 AV	54	-8.13	-57.04	-57.62	4.92	-49.39
3	10789.07	54.68 PK	74	-19.32	-52.74	-46.41	4.92	-40.58
4	10659.29	44.34 AV	54	-9.66	-58.58	-59.13	4.92	-50.92
5	19172.1	56.87 PK	74	-17.13	-48.97	-44.68	4.92	-38.39
6	18859	46.47 AV	54	-7.53	-56.19	-57.32	4.92	-48.79
7	22156.1	58.77 PK	74	-15.23	-45.69	-43.44	4.92	-36.49
8	23860.2	47.62 AV	54	-6.38	-56.44	-54.85	4.92	-47.64
9	38825.96	51.33 PK	74	-22.67	-53.41	-50.72	4.92	-43.93
10	38883.38	41.37 AV	54	-12.63	-62.55	-61.2	4.92	-53.89

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

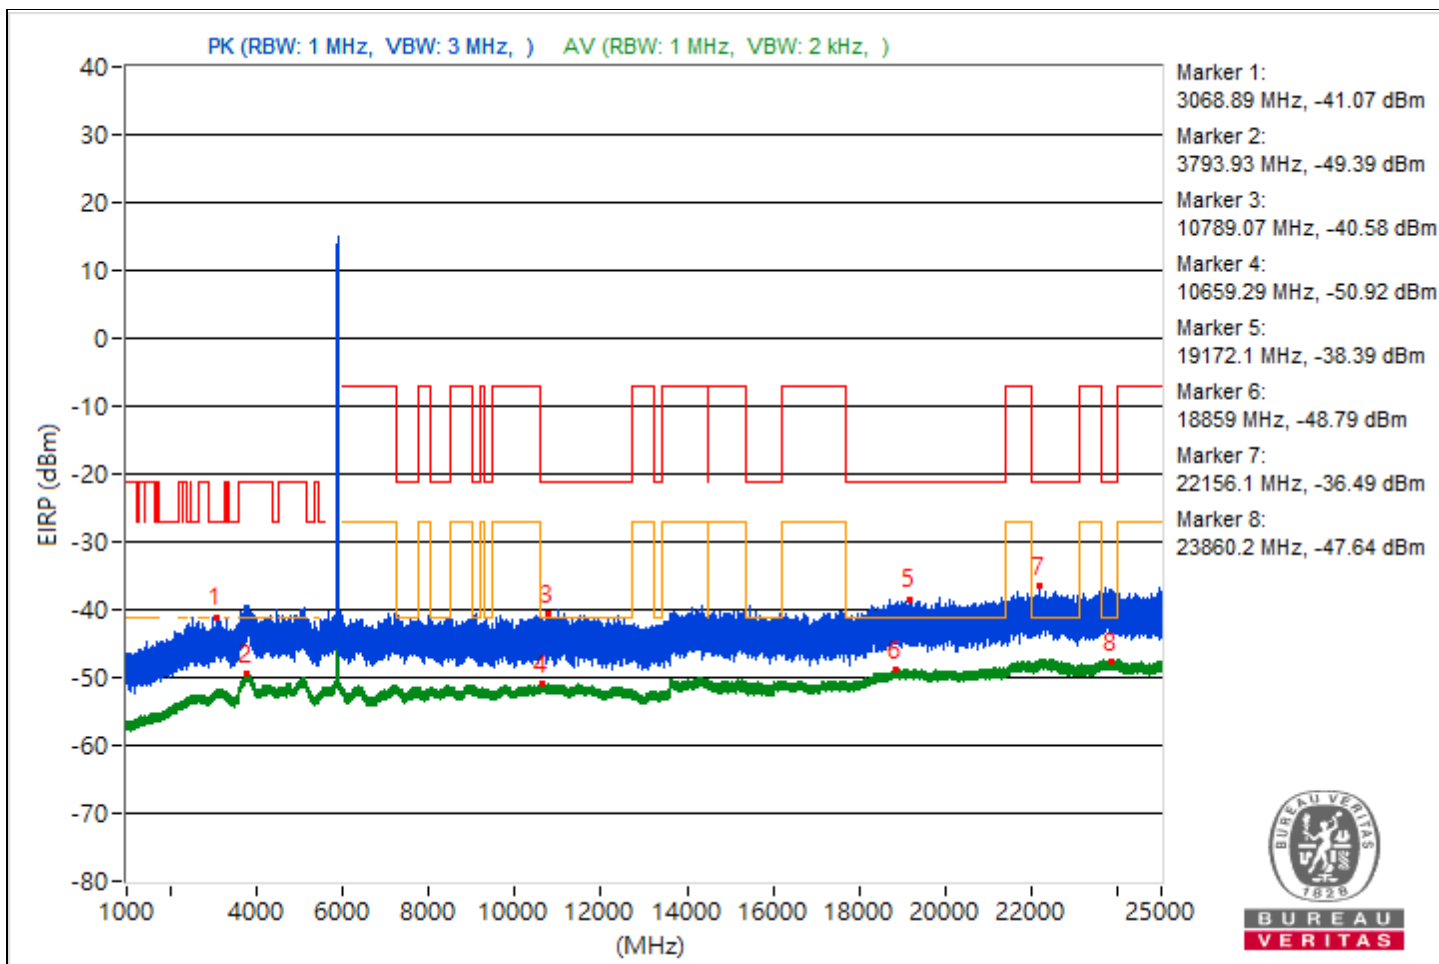

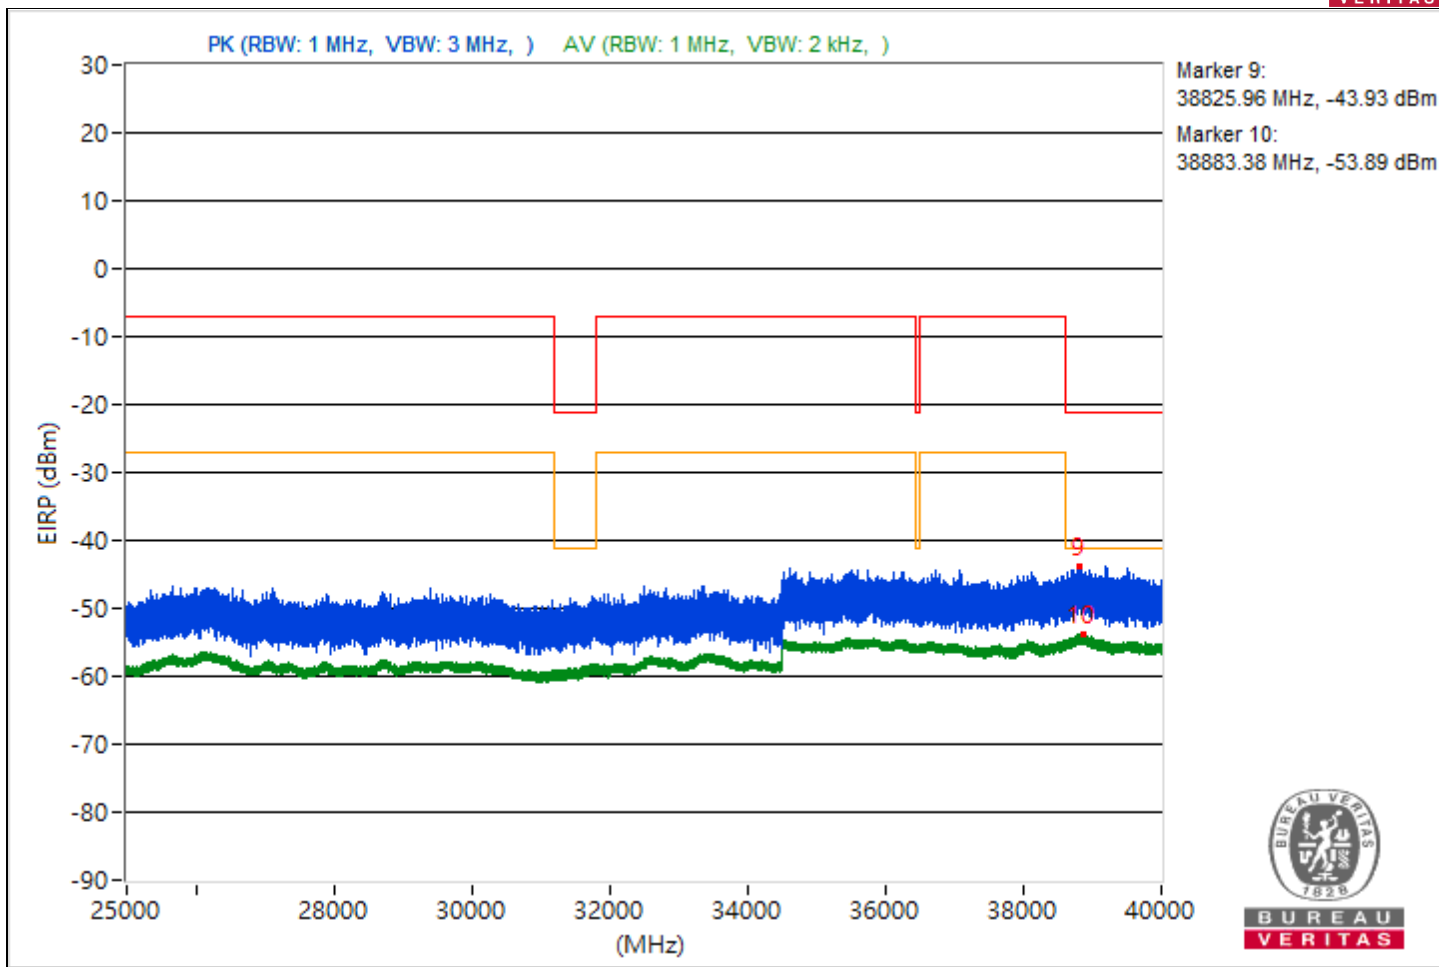



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5167.72	55.16 PK	68.26	-13.1	-46.83	-49.69	4.92	-40.1
2	4676.01	46.06 AV	54	-7.94	-56.72	-57.58	4.92	-49.2
3	11544.8	54.85 PK	74	-19.15	-50.75	-46.8	4.92	-40.41
4	11488.89	44.33 AV	54	-9.67	-58.55	-59.19	4.92	-50.93
5	19081.8	56.18 PK	74	-17.82	-45.33	-49.79	4.92	-39.08
6	19296.9	46.36 AV	54	-7.64	-57.37	-56.36	4.92	-48.9
7	22249.8	59.06 PK	74	-14.94	-42.04	-48.33	4.92	-36.2
8	22352.6	48.07 AV	54	-5.93	-55.52	-54.74	4.92	-47.19
9	38849.51	51.02 PK	74	-22.98	-51.06	-53.67	4.92	-44.24
10	38959.56	41.23 AV	54	-12.77	-62.57	-61.43	4.92	-54.03

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

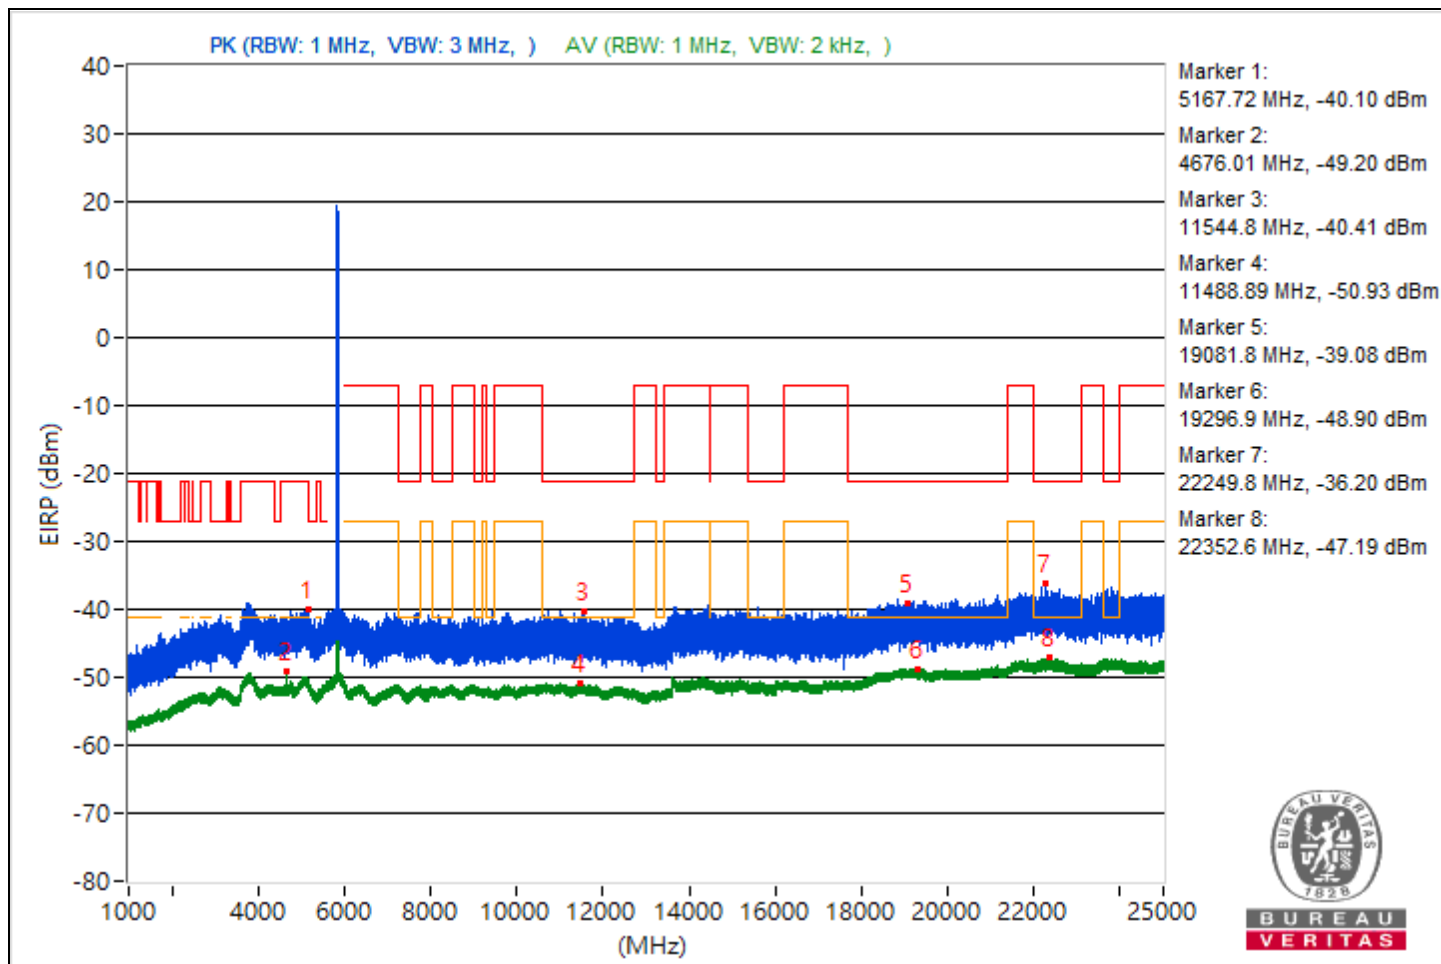

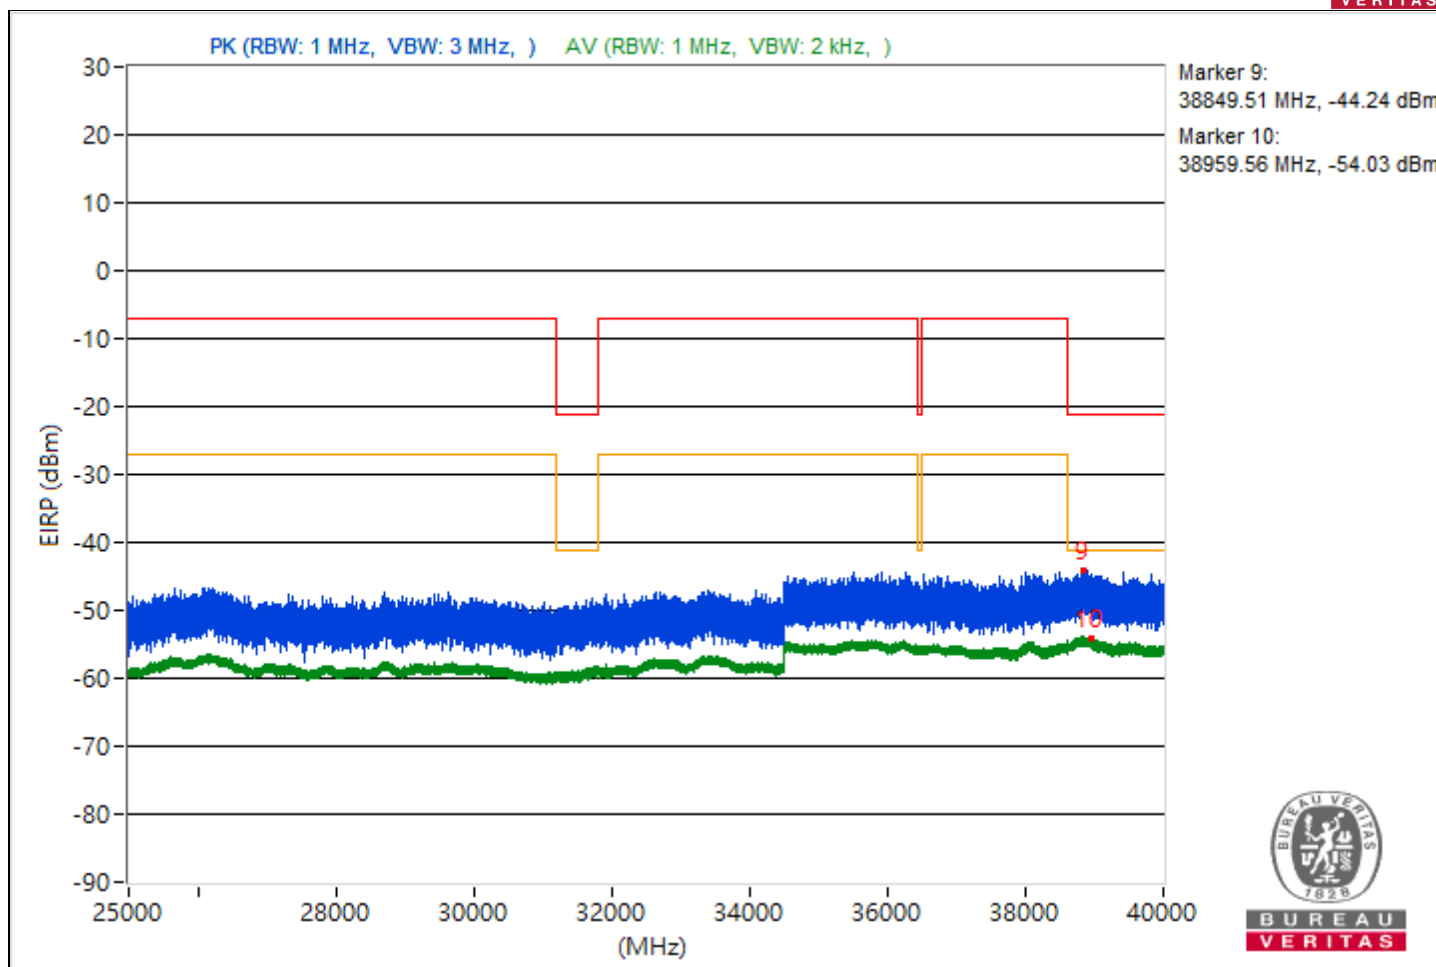





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5533.67	54.29 PK	68.26	-13.97	-52.16	-47.05	4.92	-40.97
2	4691.8	46.13 AV	54	-7.87	-56.91	-57.22	4.92	-49.13
3	11581.87	54.99 PK	74	-19.01	-50.28	-46.81	4.92	-40.27
4	8477.78	44.28 AV	54	-9.72	-58.54	-59.32	4.92	-50.98
5	19444.5	56.53 PK	74	-17.47	-44.76	-50.13	4.92	-38.73
6	18857.6	46.37 AV	54	-7.63	-56.38	-57.31	4.92	-48.89
7	23997.2	57.97 PK	74	-16.03	-42.95	-50.26	4.92	-37.29
8	23796.8	47.85 AV	54	-6.15	-55.74	-54.98	4.92	-47.41
9	38797.24	51.39 PK	74	-22.61	-54.54	-50.13	4.92	-43.87
10	38898.58	41.39 AV	54	-12.61	-62.36	-61.3	4.92	-53.87

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

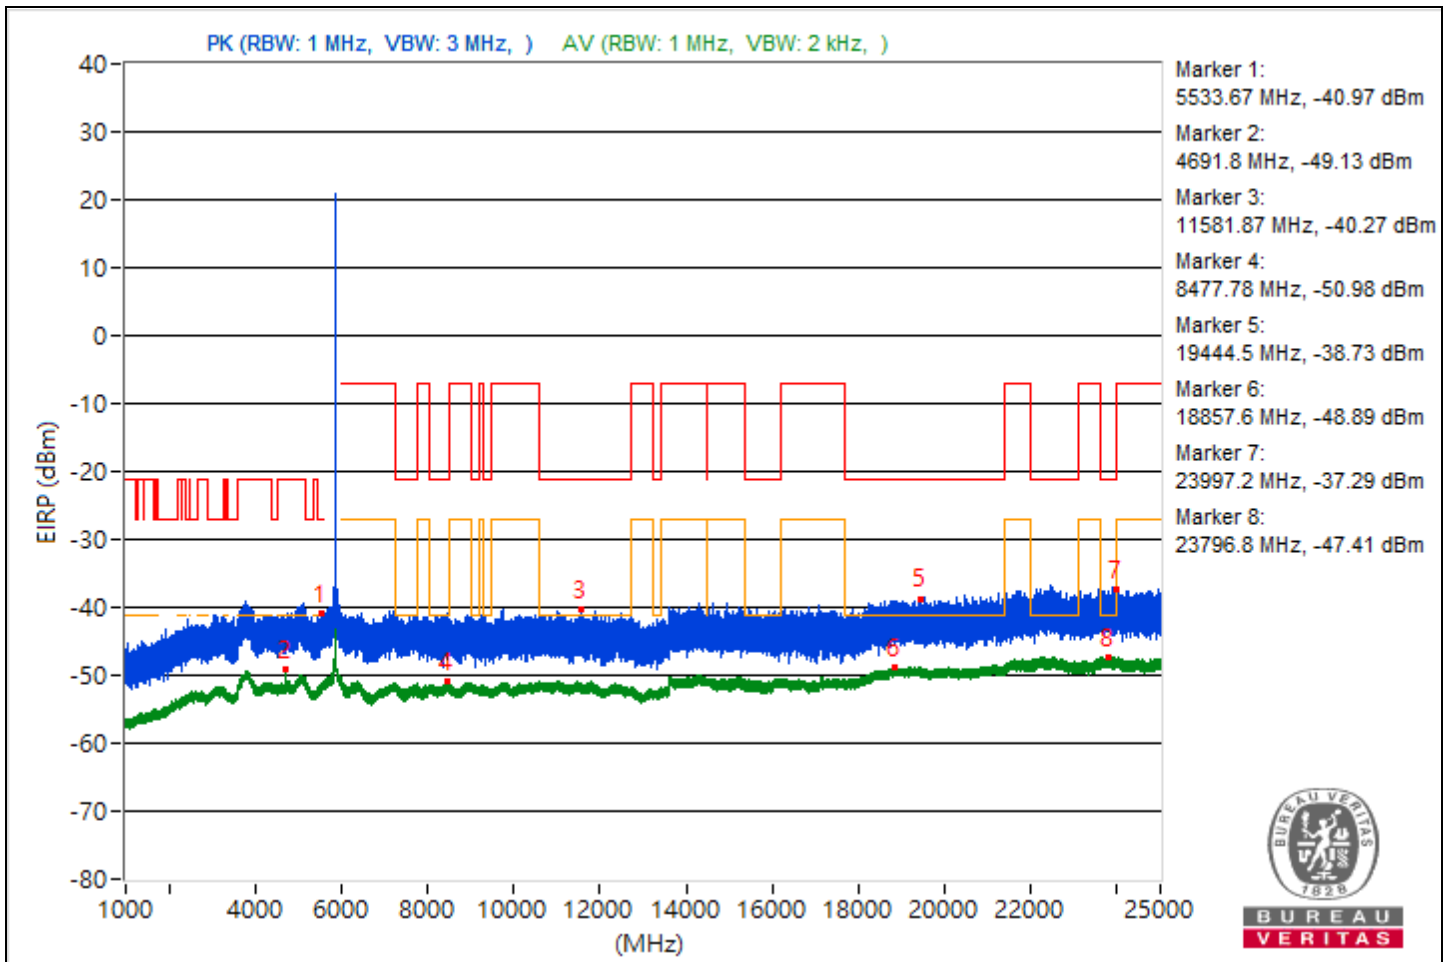

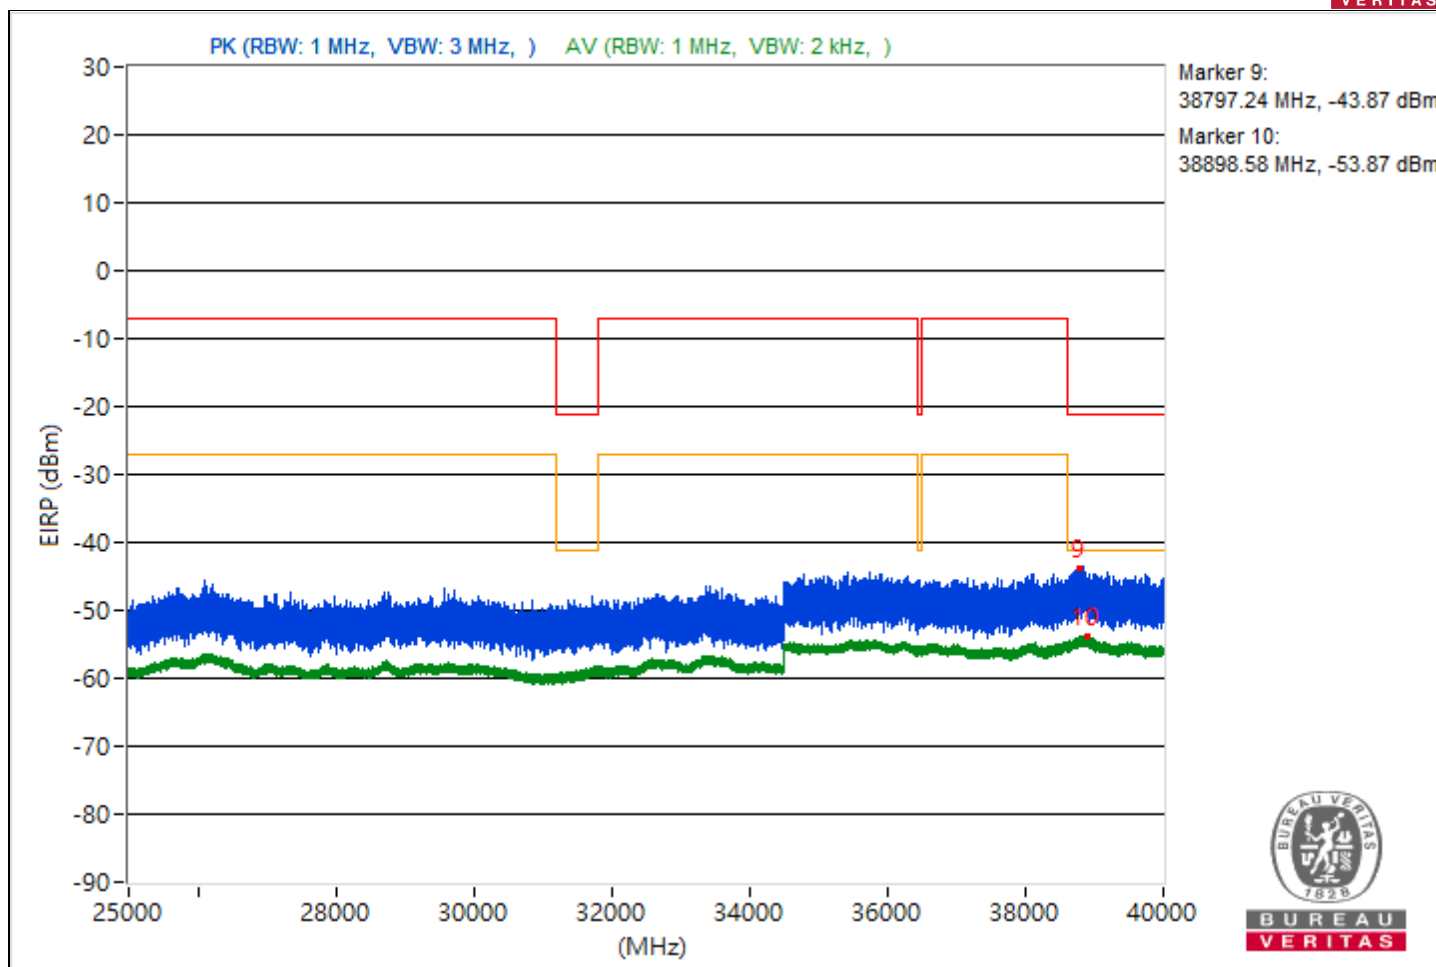



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5179.23	54.6 PK	68.26	-13.66	-50.45	-47.3	4.92	-40.66
2	4707.9	46.69 AV	54	-7.31	-55.99	-57.07	4.92	-48.57
3	11541.6	54.77 PK	74	-19.23	-46.45	-52.12	4.92	-40.49
4	10980.44	44.28 AV	54	-9.72	-58.41	-59.48	4.92	-50.98
5	18733.2	56.5 PK	74	-17.5	-51.28	-44.51	4.92	-38.76
6	18829.4	46.3 AV	54	-7.7	-56.29	-57.58	4.92	-48.96
7	22126.8	58.71 PK	74	-15.29	-45.83	-43.46	4.92	-36.55
8	22364.1	47.95 AV	54	-6.05	-55.81	-54.75	4.92	-47.31
9	38983.64	51.19 PK	74	-22.81	-49.74	-57.02	4.92	-44.07
10	38914.04	41.4 AV	54	-12.6	-61.28	-62.38	4.92	-53.86

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

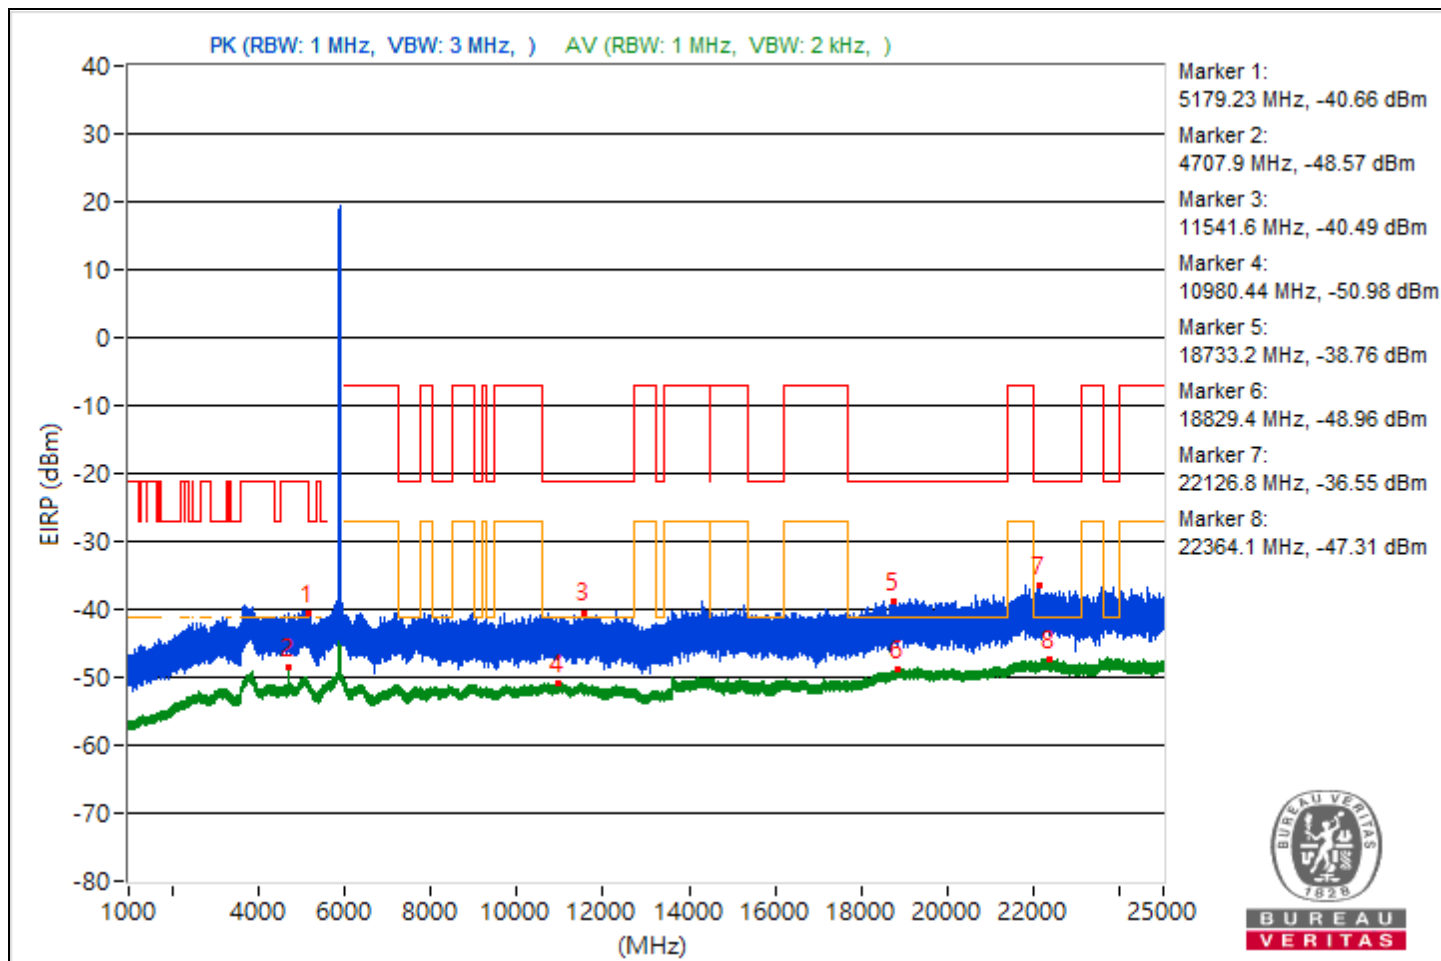

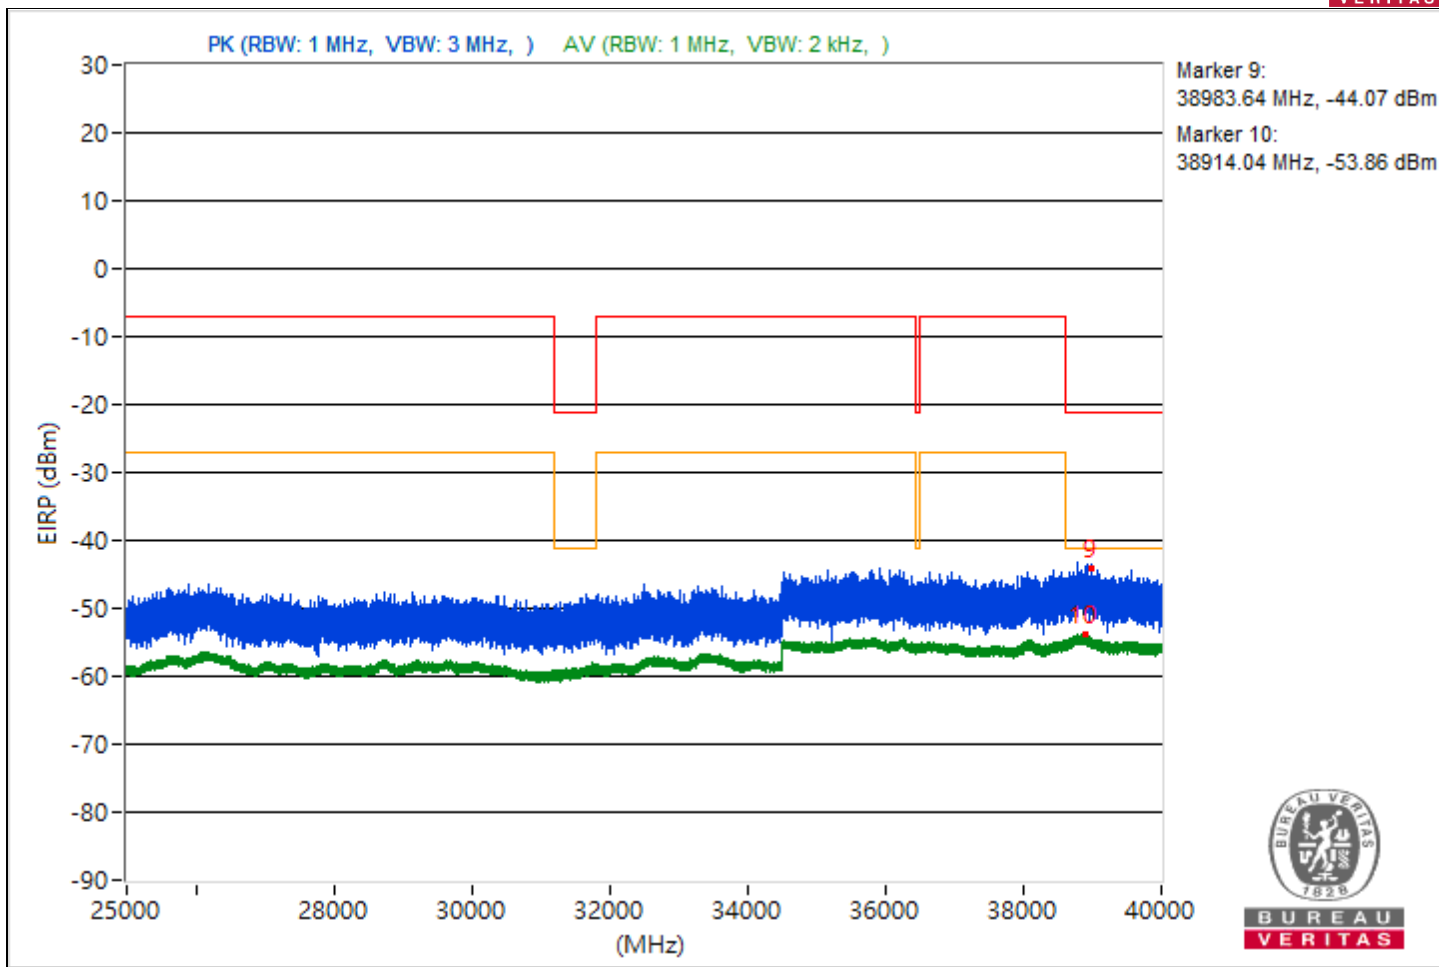



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5156.52	54.04 PK	68.26	-14.22	-47.29	-52.48	4.92	-41.22
2	4676.01	46.39 AV	54	-7.61	-57.3	-56.35	4.92	-48.87
3	11542.22	54.81 PK	74	-19.19	-46.5	-51.75	4.92	-40.45
4	10680.98	44.2 AV	54	-9.8	-58.63	-59.39	4.92	-51.06
5	19116	56.91 PK	74	-17.09	-44.05	-51.13	4.92	-38.35
6	18898.8	46.32 AV	54	-7.68	-56.3	-57.53	4.92	-48.94
7	22389.8	58.17 PK	74	-15.83	-43.4	-47.65	4.92	-37.09
8	22180.1	47.79 AV	54	-6.21	-56.21	-54.71	4.92	-47.47
9	38864.62	51.51 PK	74	-22.49	-54.77	-49.9	4.92	-43.75
10	38818.22	41.18 AV	54	-12.82	-62.63	-61.48	4.92	-54.08

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

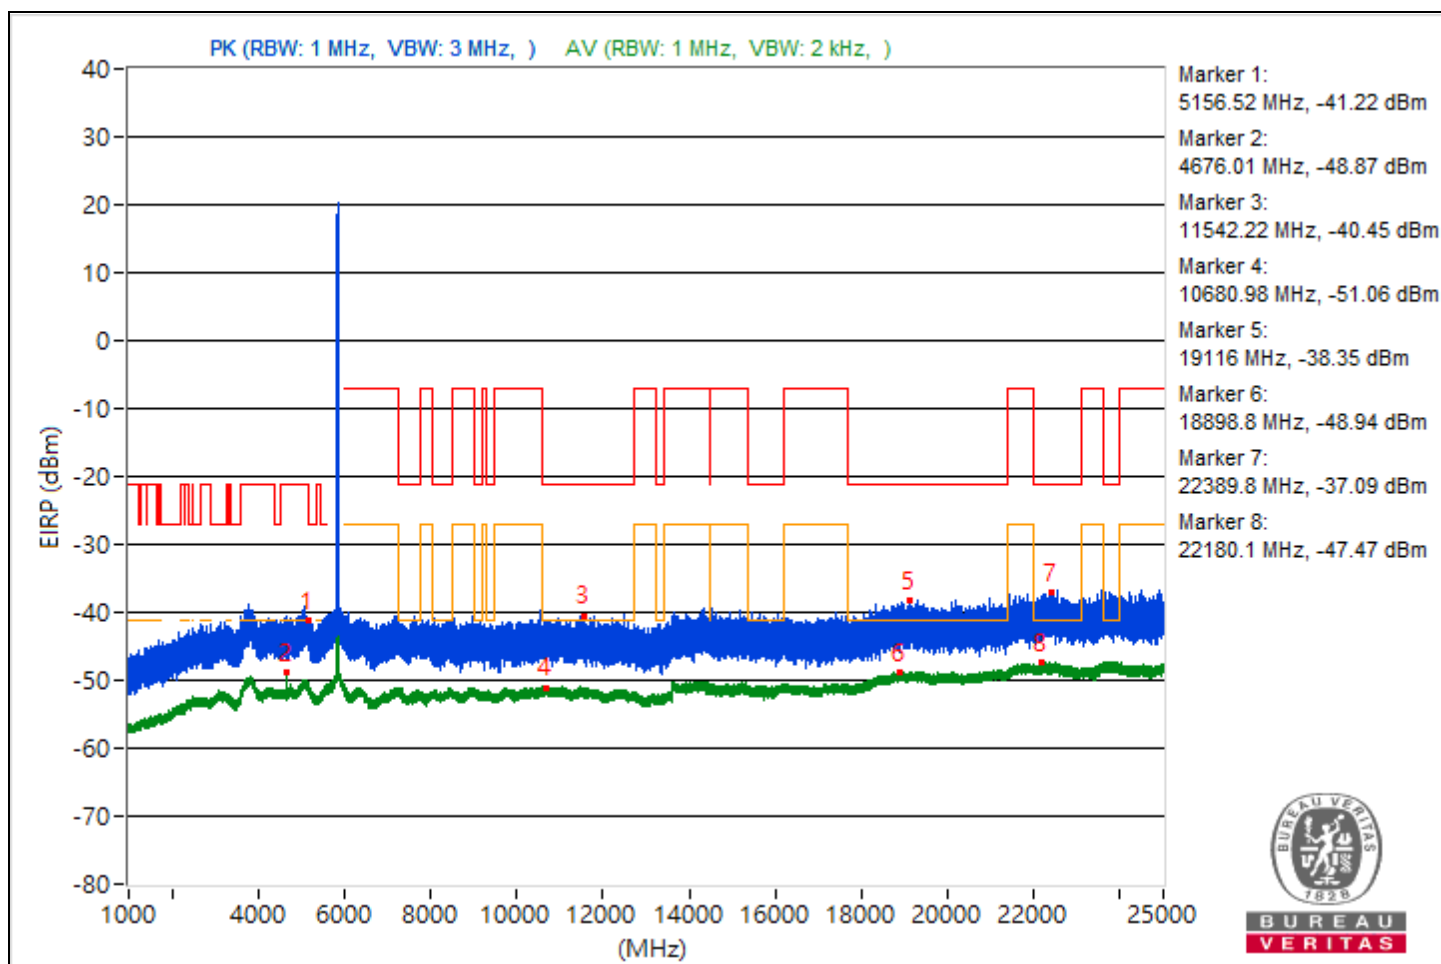

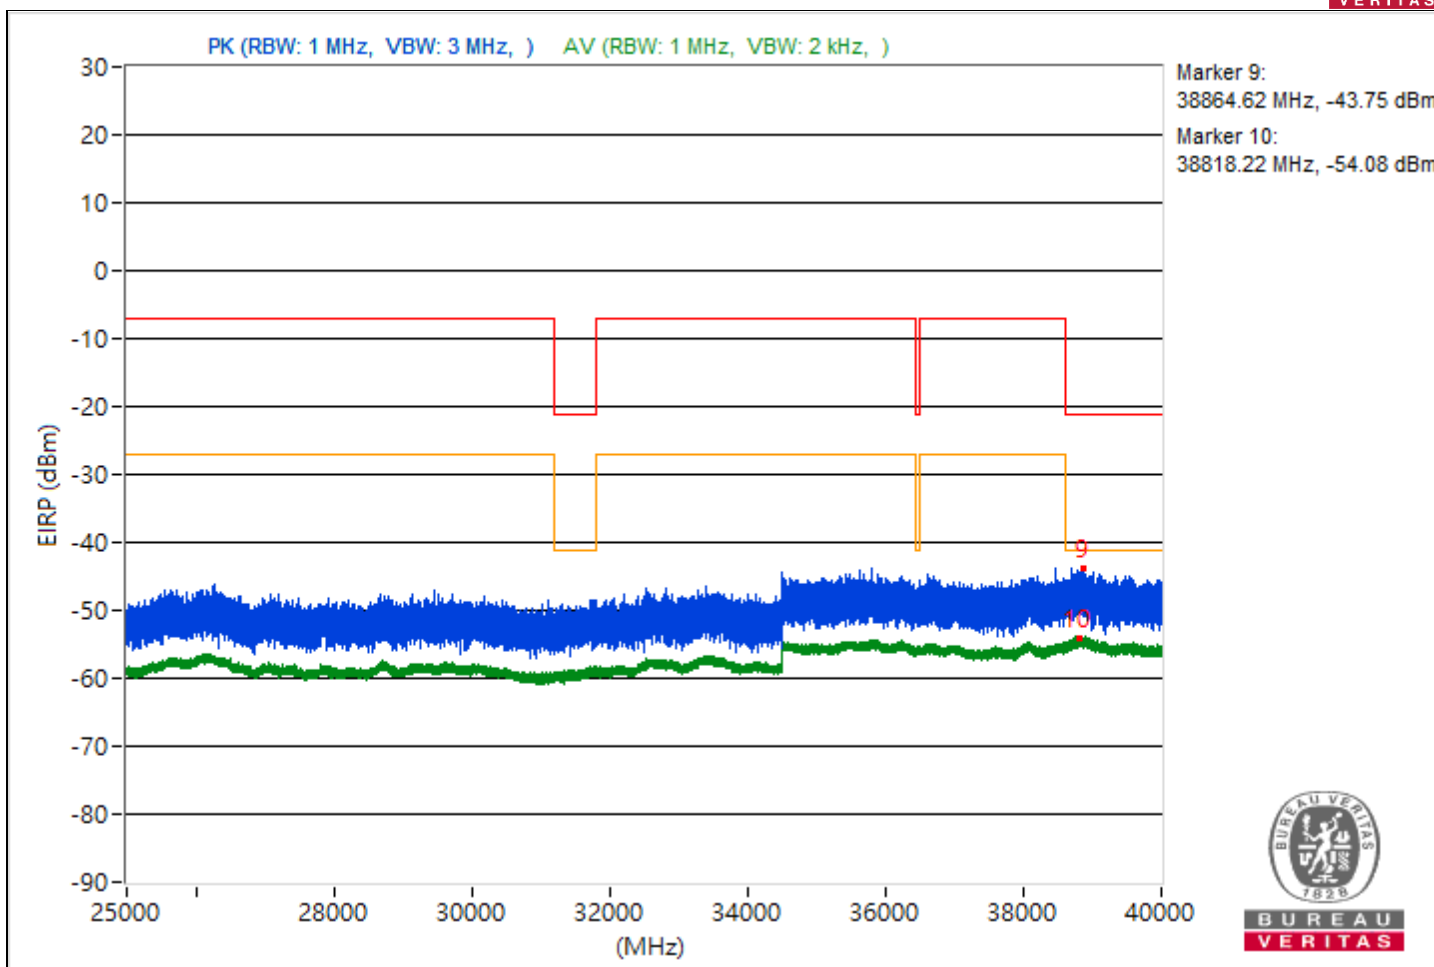



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5248.14	54.35 PK	68.26	-13.91	-52.21	-46.96	4.92	-40.91
2	4691.88	46.26 AV	54	-7.74	-57.2	-56.68	4.92	-49
3	11458.93	54.83 PK	74	-19.17	-46.19	-52.88	4.92	-40.43
4	10617.6	44.35 AV	54	-9.65	-59.4	-58.35	4.92	-50.91
5	19391.4	56.29 PK	74	-17.71	-44.65	-51.8	4.92	-38.97
6	19160	46.52 AV	54	-7.48	-57.02	-56.33	4.92	-48.74
7	23674.6	58.74 PK	74	-15.26	-47.06	-42.84	4.92	-36.52
8	23606.3	47.79 AV	54	-6.21	-55.99	-54.88	4.92	-47.47
9	38711.02	51.18 PK	74	-22.82	-50.13	-55.39	4.92	-44.08
10	38797.6	41.12 AV	54	-12.88	-61.36	-62.92	4.92	-54.14

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

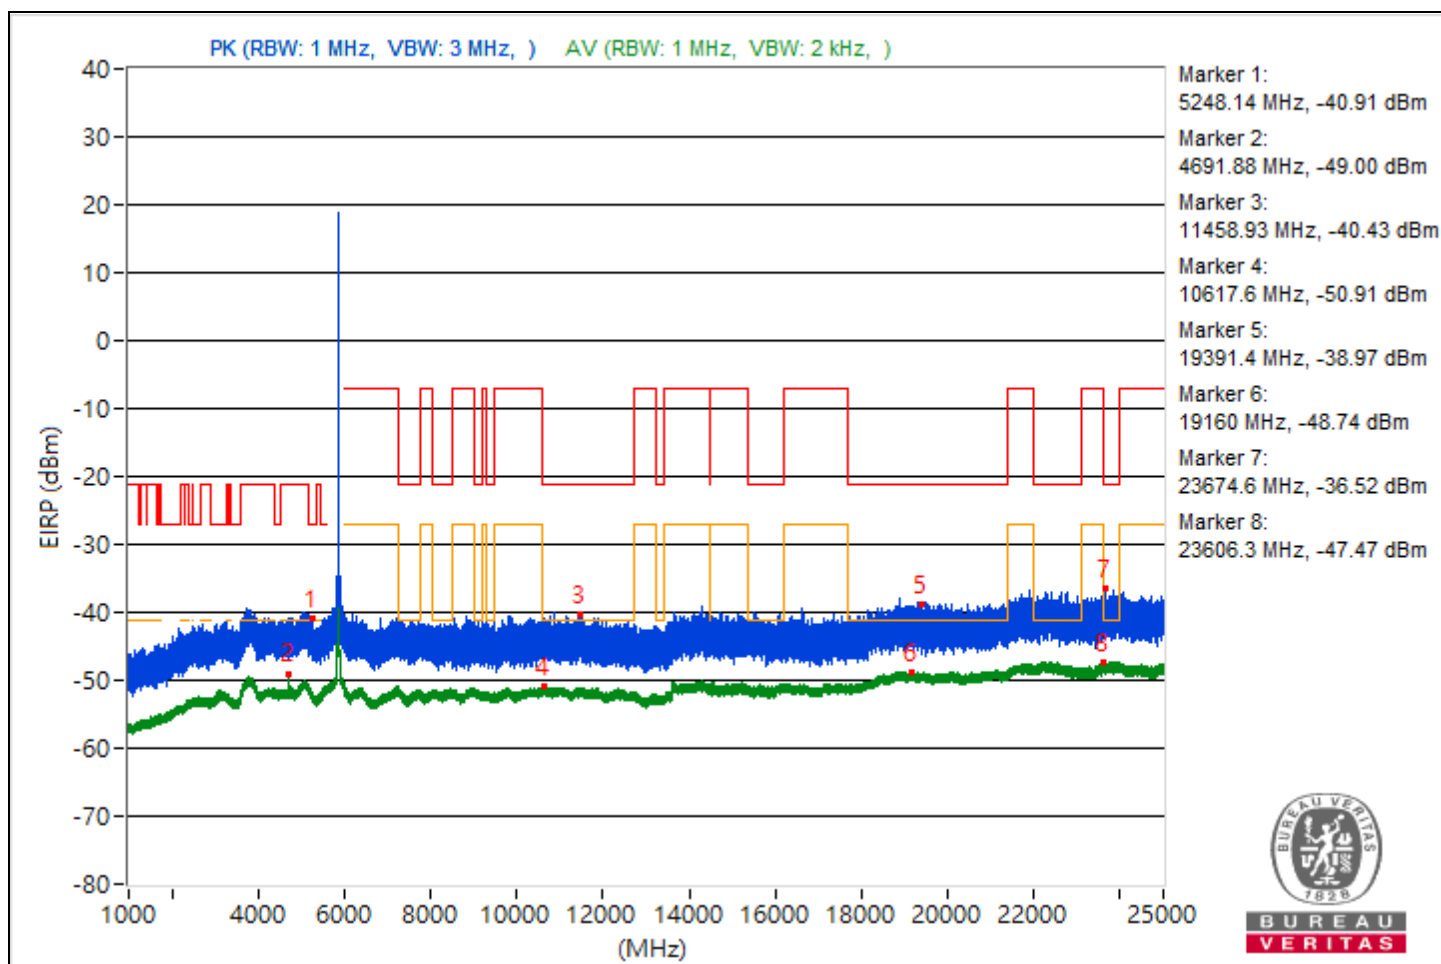

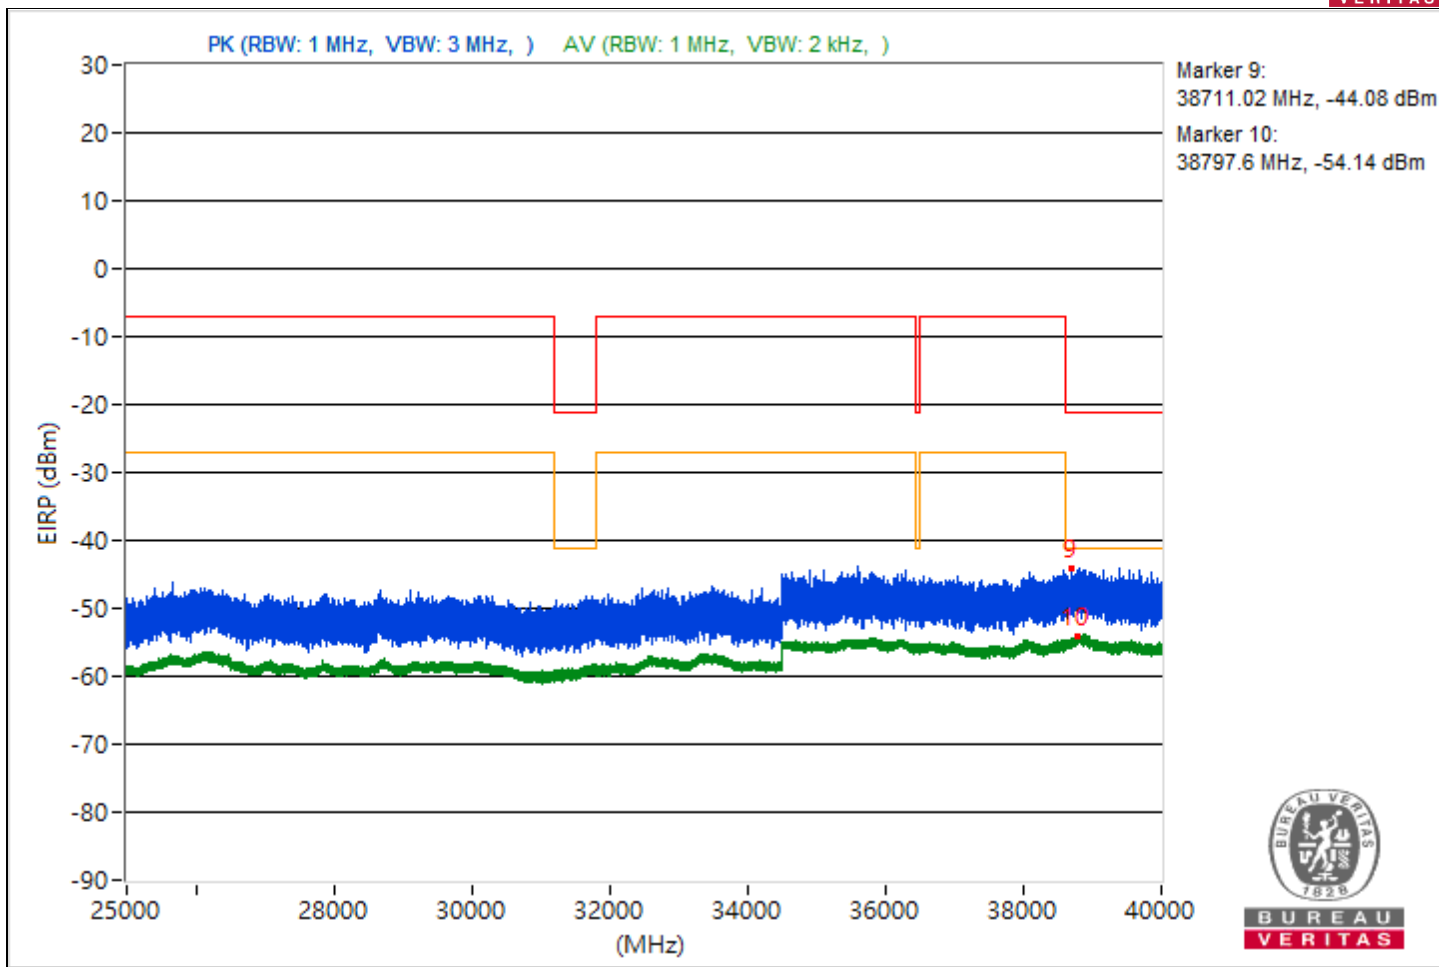



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5174.8	55.54 PK	68.26	-12.72	-48.14	-47.22	4.92	-39.72
2	4707.9	46.27 AV	54	-7.73	-56.95	-56.89	4.92	-48.99
3	10774.49	54.69 PK	74	-19.31	-52.14	-46.55	4.92	-40.57
4	11486.04	44.11 AV	54	-9.89	-58.51	-59.74	4.92	-51.15
5	18797.2	56.85 PK	74	-17.15	-44.82	-48.71	4.92	-38.41
6	18856.4	46.43 AV	54	-7.57	-57.39	-56.21	4.92	-48.83
7	22315.4	57.78 PK	74	-16.22	-43.51	-48.89	4.92	-37.48
8	22295.9	47.76 AV	54	-6.24	-54.76	-56.22	4.92	-47.5
9	38800.53	51.62 PK	74	-22.38	-50.42	-53.15	4.92	-43.64
10	38840.09	41.44 AV	54	-12.56	-61.32	-62.24	4.92	-53.82

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

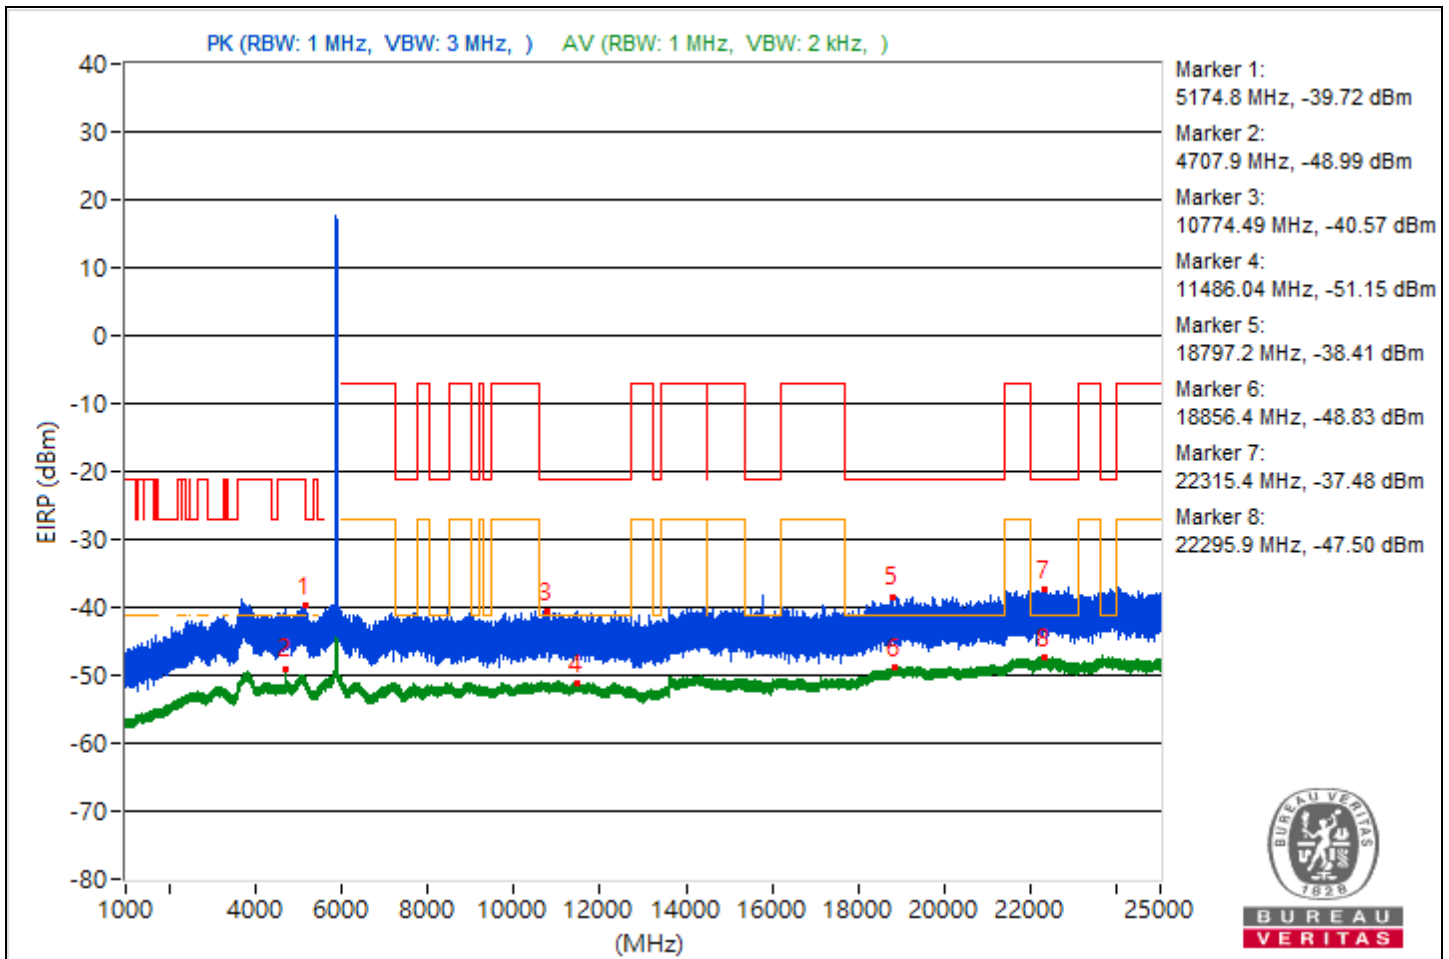

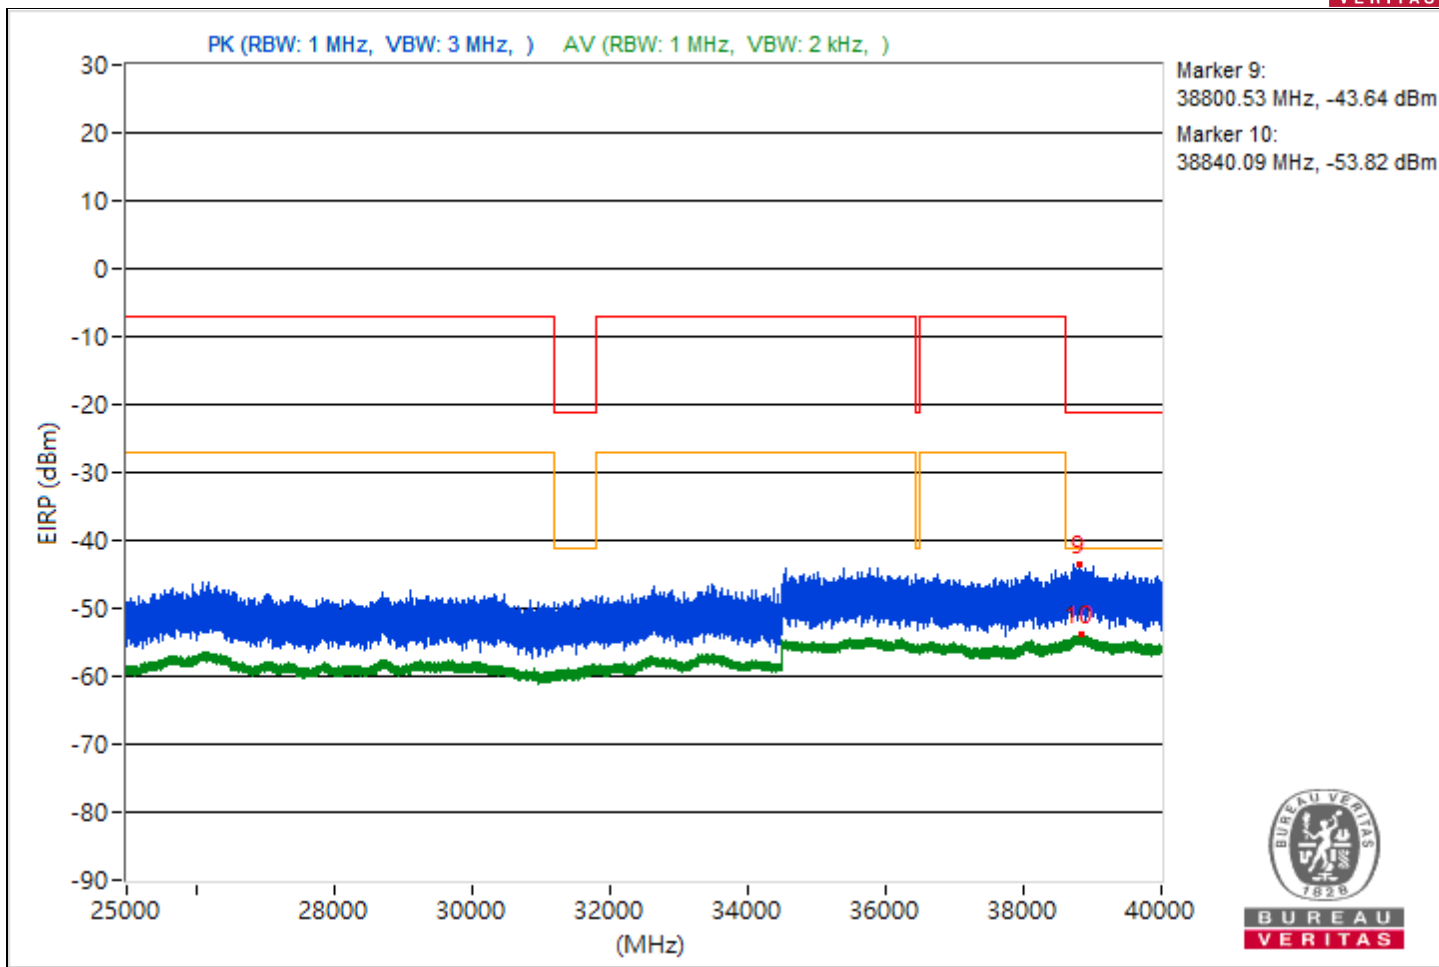



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5167.26	54.61 PK	68.26	-13.65	-47.13	-50.78	4.92	-40.65
2	3819.68	45.74 AV	54	-8.26	-56.91	-58.07	4.92	-49.52
3	10606.58	55.41 PK	74	-18.59	-45.88	-51.24	4.92	-39.85
4	11513.51	44.32 AV	54	-9.68	-58.5	-59.26	4.92	-50.94
5	18891	56.35 PK	74	-17.65	-44.75	-51.01	4.92	-38.91
6	18843.6	46.68 AV	54	-7.32	-56.02	-57.06	4.92	-48.58
7	22233.5	58.84 PK	74	-15.16	-42.62	-47.28	4.92	-36.42
8	23915.9	47.69 AV	54	-6.31	-56.06	-54.99	4.92	-47.57
9	38922.84	51.54 PK	74	-22.46	-50.04	-54.24	4.92	-43.72
10	38798.49	41.18 AV	54	-12.82	-61.26	-62.92	4.92	-54.08

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

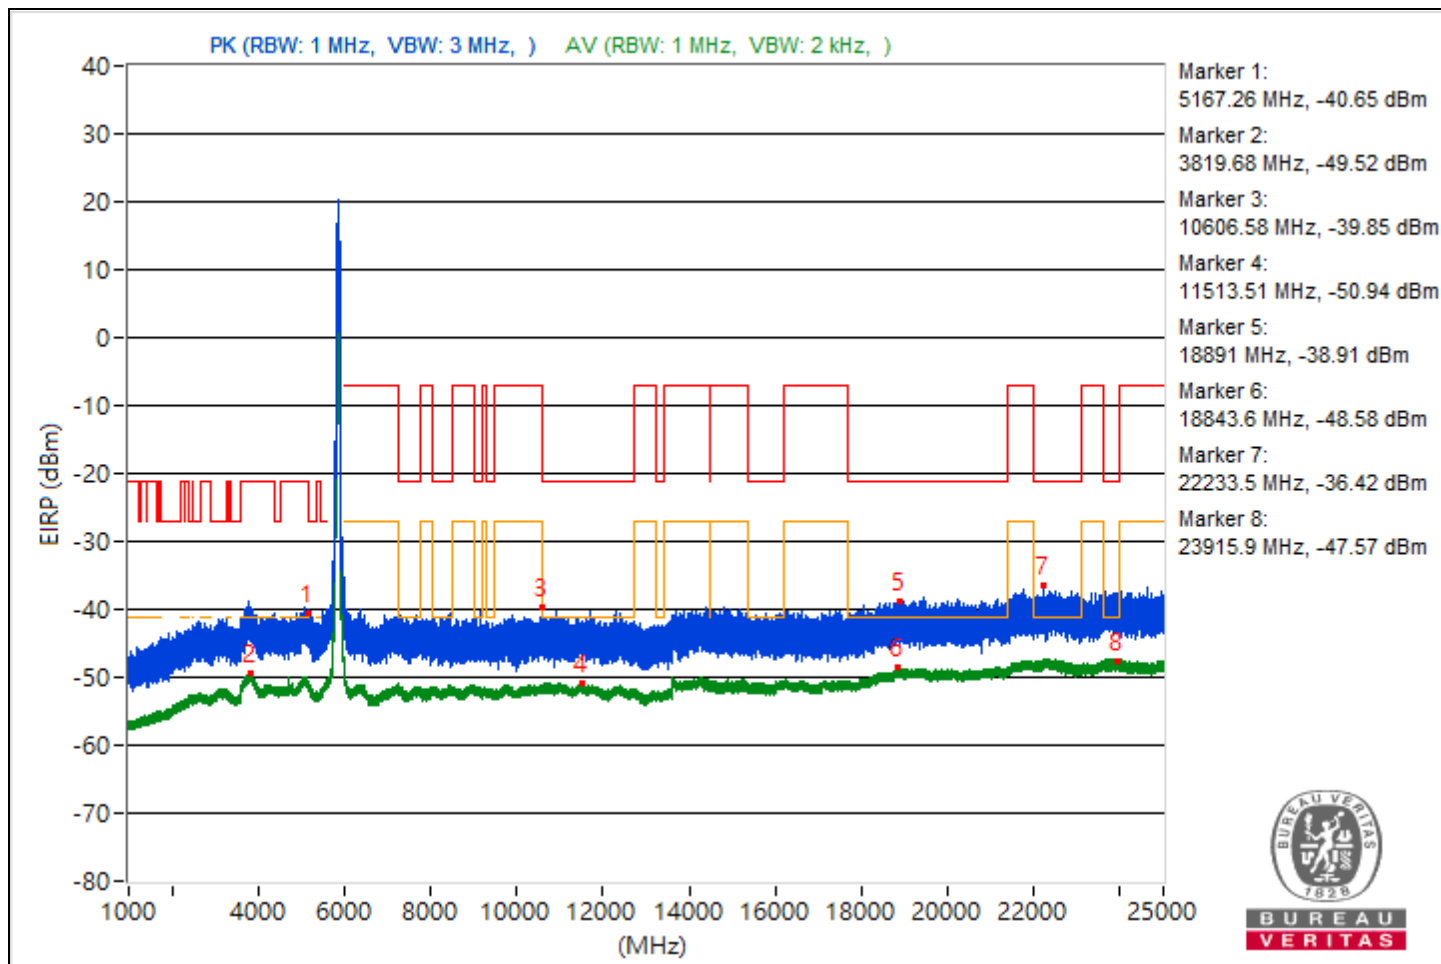

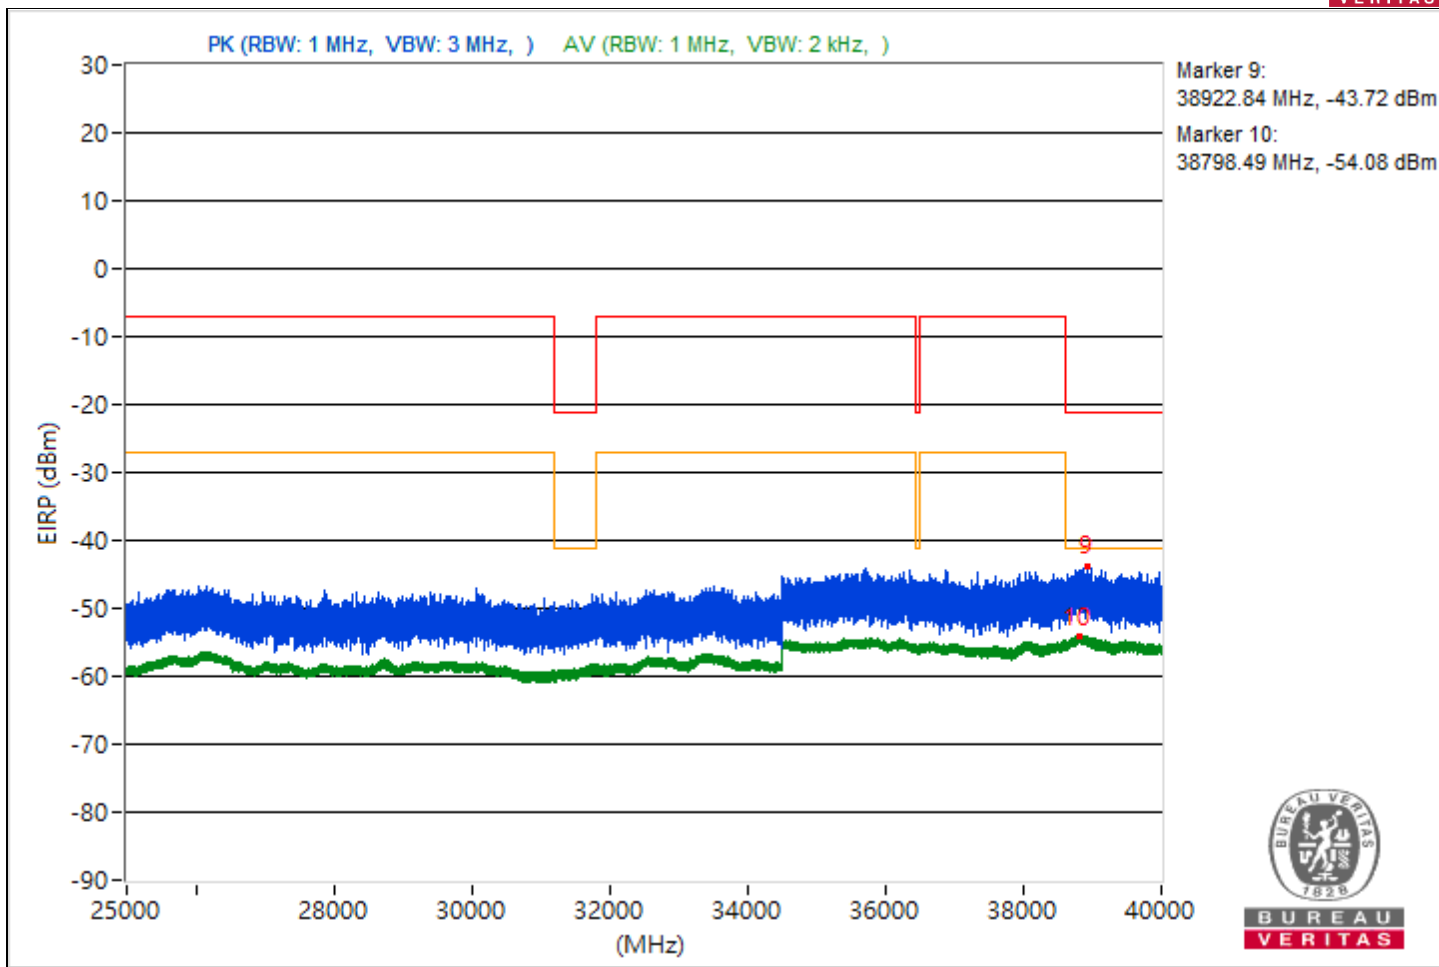



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5598.22	55.03 PK	68.26	-13.23	-46.27	-51.59	4.92	-40.23
2	4652.06	46.42 AV	54	-7.58	-56.71	-56.82	4.92	-48.84
3	10612.71	55.17 PK	74	-18.83	-46.68	-49.96	4.92	-40.09
4	10701.78	44.28 AV	54	-9.72	-58.63	-59.2	4.92	-50.98
5	18974.7	56.75 PK	74	-17.25	-48.86	-44.89	4.92	-38.51
6	18834.2	46.39 AV	54	-7.61	-57.55	-56.16	4.92	-48.87
7	22681.5	58.45 PK	74	-15.55	-48.76	-42.69	4.92	-36.81
8	22307.3	47.87 AV	54	-6.13	-54.94	-55.74	4.92	-47.39
9	38819.2	51.45 PK	74	-22.55	-55.87	-49.66	4.92	-43.81
10	38846.13	41.32 AV	54	-12.68	-62.62	-61.23	4.92	-53.94

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

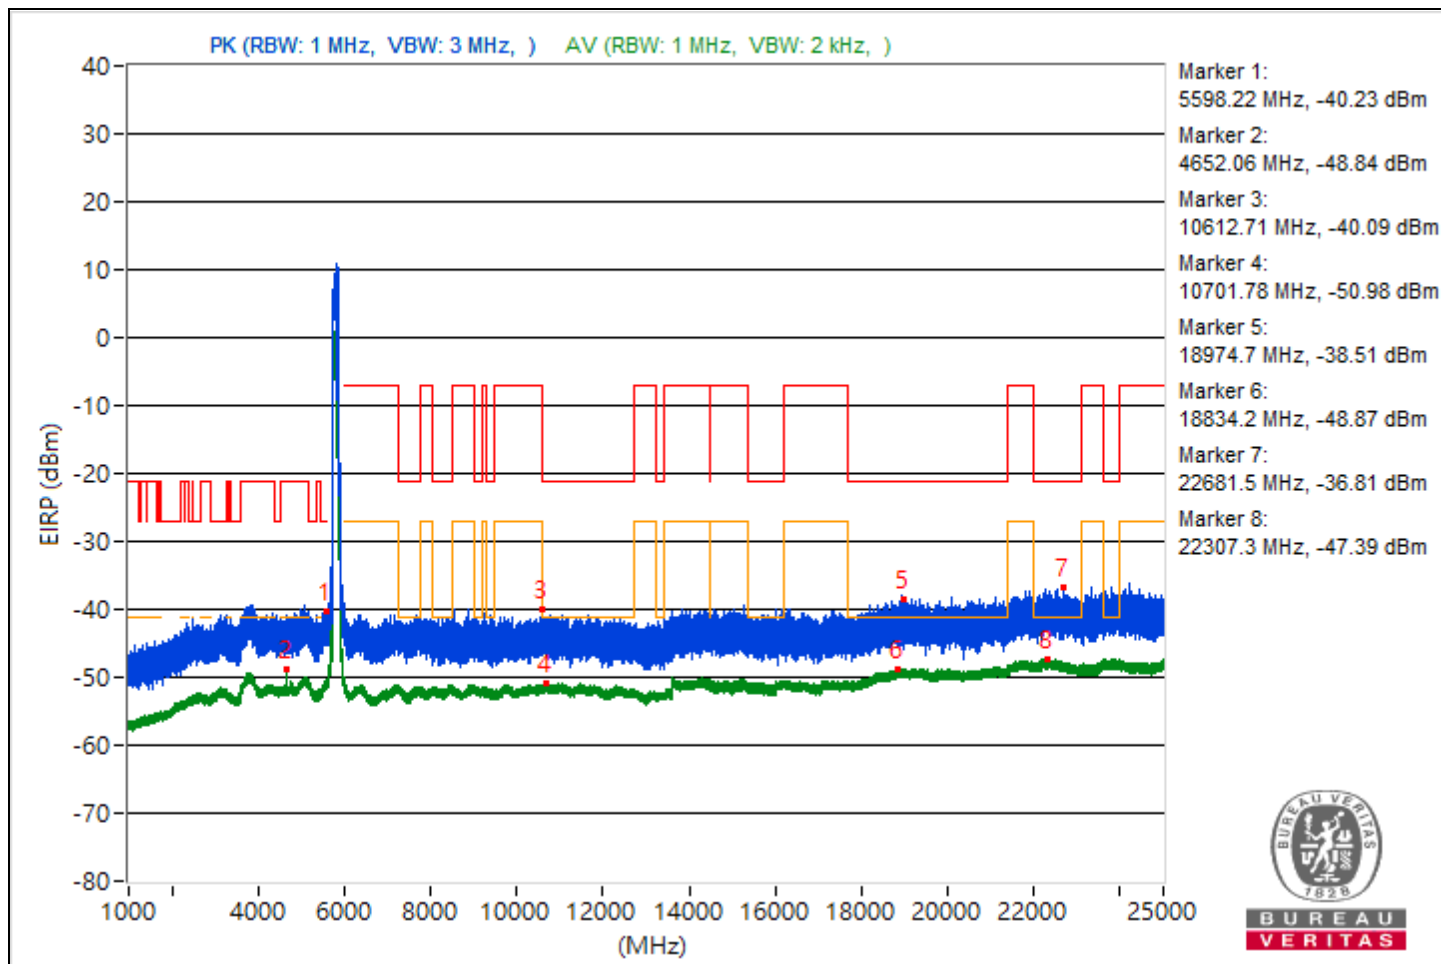

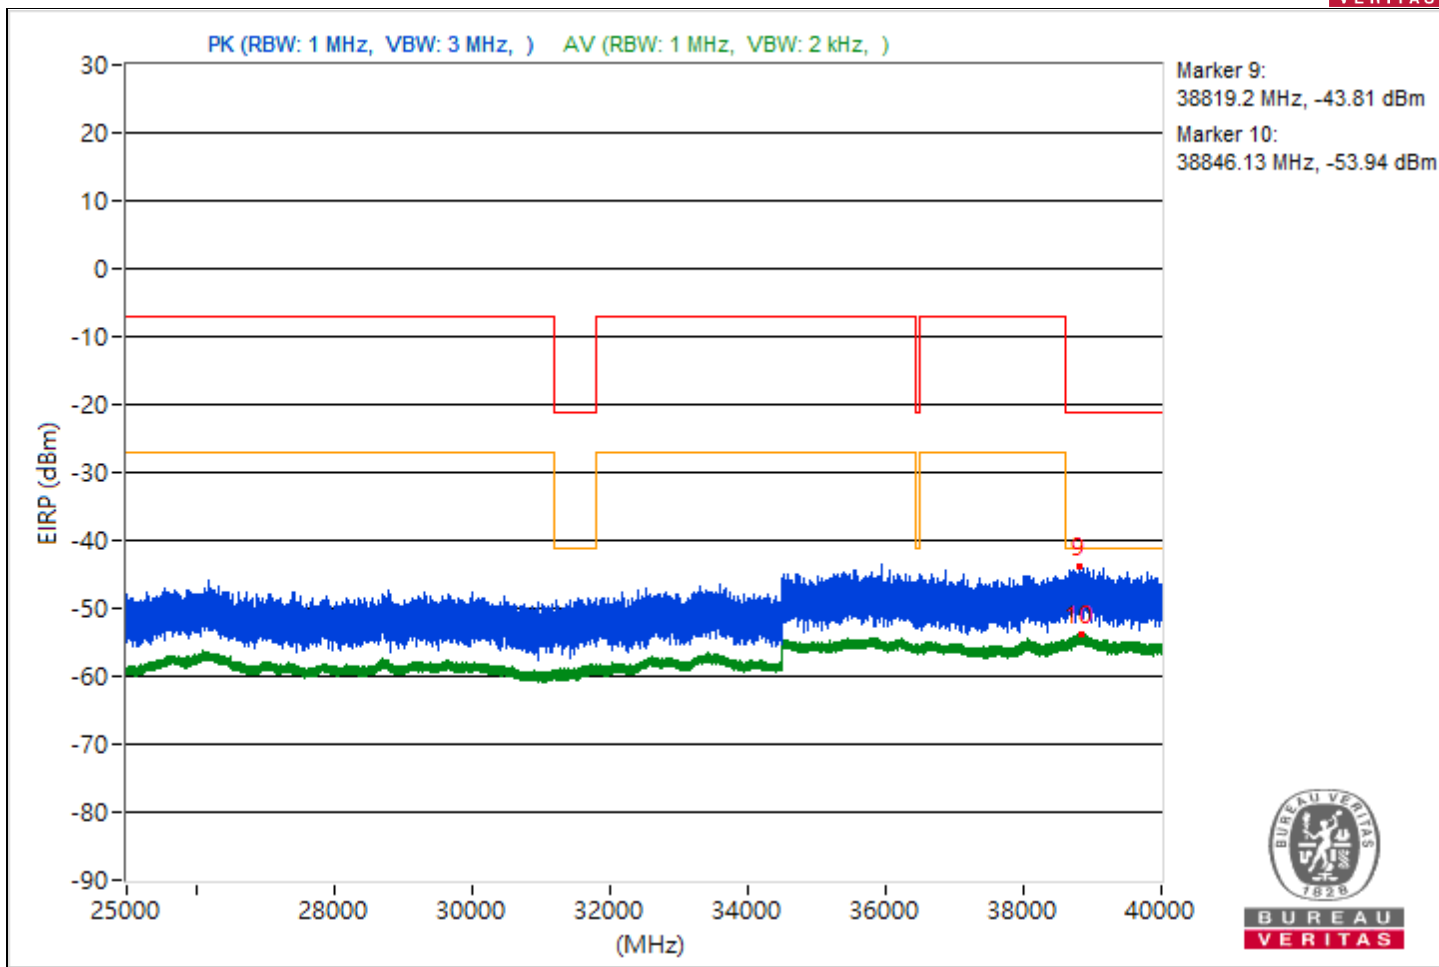





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5585	55.14 PK	68.26	-13.12	-51.07	-46.28	4.92	-40.12
2	4651.98	46.34 AV	54	-7.66	-56.57	-57.15	4.92	-48.92
3	8185.07	54.49 PK	74	-19.51	-46.53	-53.24	4.92	-40.77
4	10644.18	44.19 AV	54	-9.81	-58.4	-59.7	4.92	-51.07
5	19010.4	58.03 PK	74	-15.97	-43.28	-48.52	4.92	-37.23
6	18834.9	46.52 AV	54	-7.48	-56.21	-57.18	4.92	-48.74
7	22159.5	58.09 PK	74	-15.91	-48.8	-43.13	4.92	-37.17
8	23797.7	48.02 AV	54	-5.98	-54.7	-55.71	4.92	-47.24
9	38905.87	50.83 PK	74	-23.17	-55.28	-50.63	4.92	-44.43
10	38850.67	41.55 AV	54	-12.45	-61.28	-62.02	4.92	-53.71

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

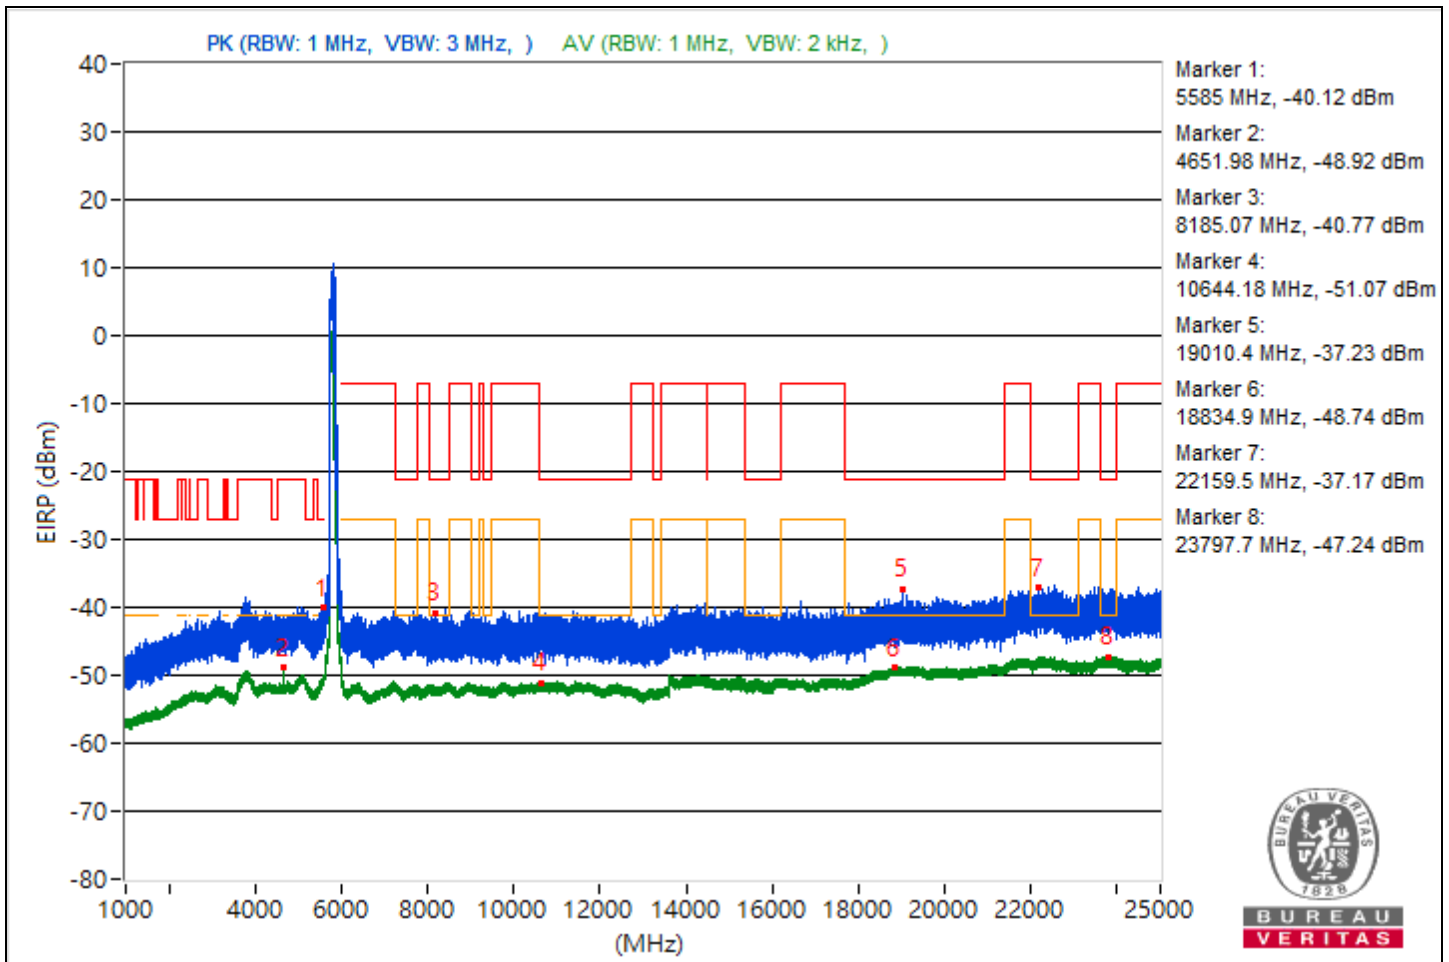

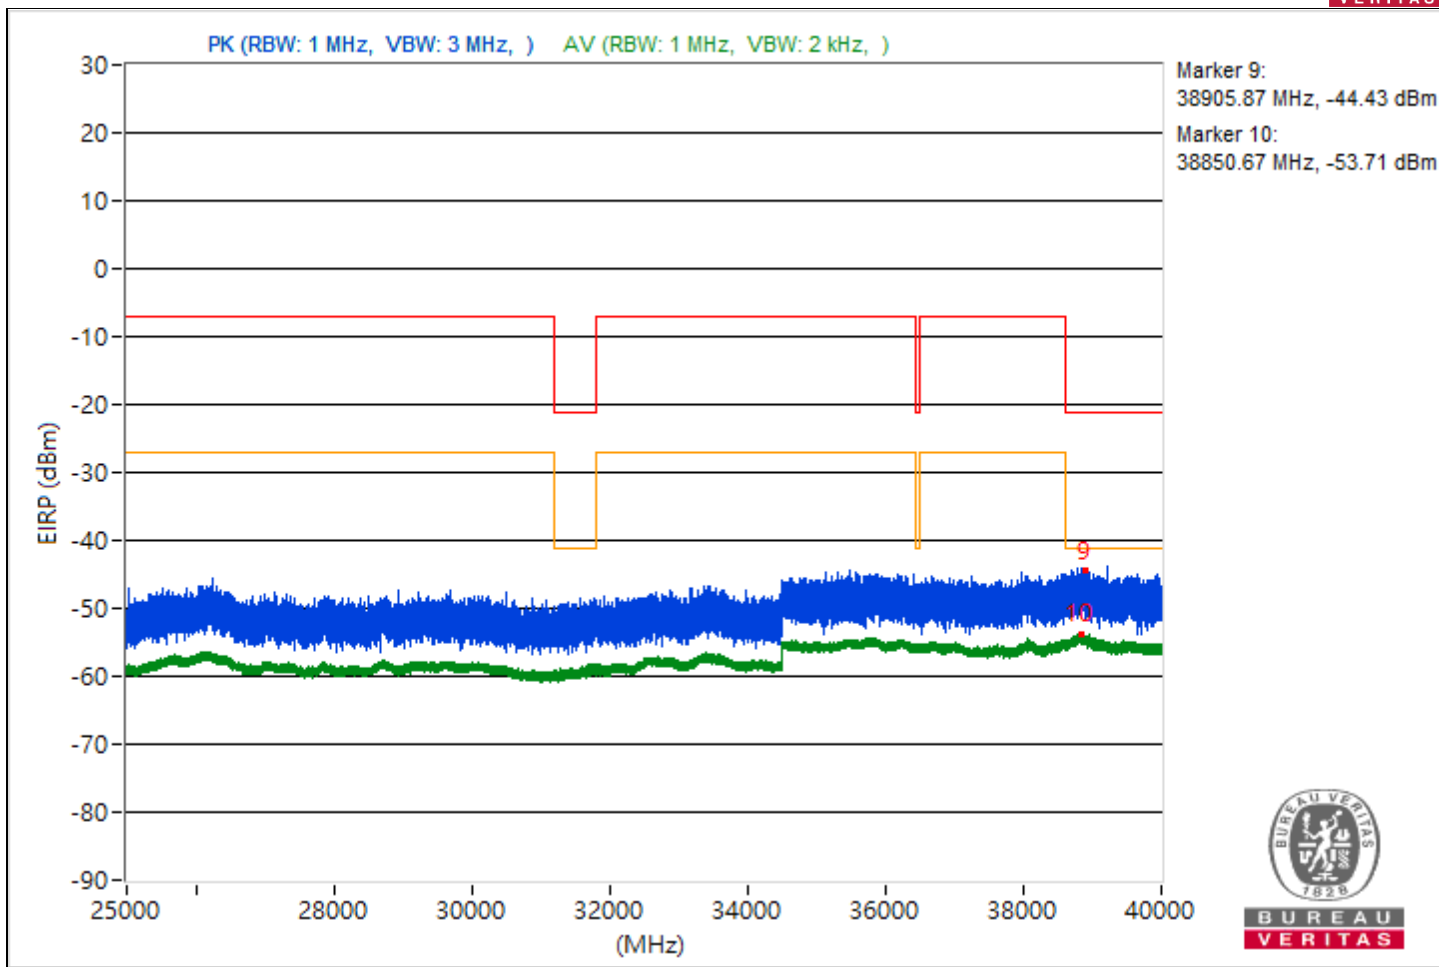


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5845.81	117.33 PK			15	13.07	4.92	22.07
2	#5639.05	63.59 PK	68.26	-4.67	-38	-42.18	4.92	-31.67
3	#5670.12	63.87 PK	83.15	-19.28	-40.72	-38.27	4.92	-31.39
4	#5719.85	63.53 PK	110.82	-47.29	-40.87	-38.72	4.92	-31.73
5	#5721.6	63.37 PK	114.51	-51.14	-39.05	-40.77	4.92	-31.89
6	#5904.99	65.09 PK	102.93	-37.84	-39.19	-37.23	4.92	-30.17
7	#6005.29	64.18 PK	88.26	-24.08	-37.4	-41.59	4.92	-31.08
8	*5844.43	107.25 AV			3.73	4.36	4.92	11.99
9	#5895.06	54.62 AV	90.22	-35.6	-48.77	-48.39	4.92	-40.64
10	#5925.18	53.55 AV	68.26	-14.71	-49.52	-49.77	4.92	-41.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

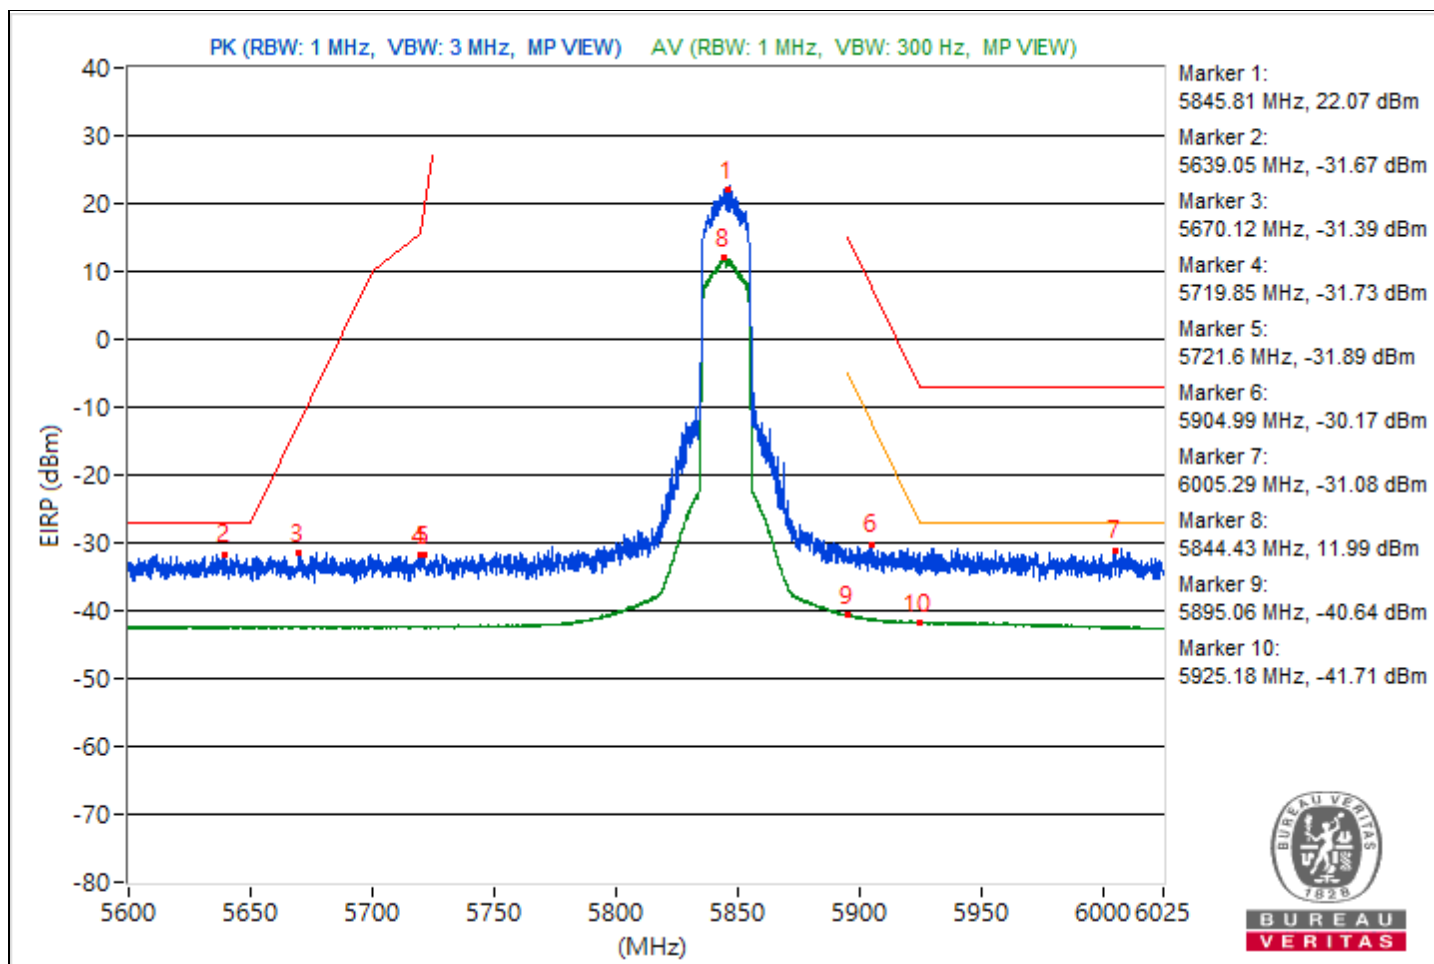


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5865.31	117.09 PK			14.52	13.17	4.92	21.83
2	#5647.33	64.19 PK	68.26	-4.07	-40.64	-37.82	4.92	-31.07
3	#5659.55	63.86 PK	75.33	-11.47	-41.29	-37.98	4.92	-31.4
4	#5702.48	64.71 PK	105.95	-41.24	-38.37	-38.59	4.92	-30.55
5	#5720.49	63.7 PK	111.98	-48.28	-41.17	-38.28	4.92	-31.56
6	#5896.92	67.5 PK	108.85	-41.35	-39.27	-33.76	4.92	-27.76
7	#5947.01	64.47 PK	88.26	-23.79	-37.41	-40.63	4.92	-30.79
8	*5864.62	107.09 AV			3.62	4.16	4.92	11.83
9	#5895.27	57.1 AV	90.06	-32.96	-46.23	-45.95	4.92	-38.16
10	#5927.25	54 AV	68.26	-14.26	-49.15	-49.23	4.92	-41.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

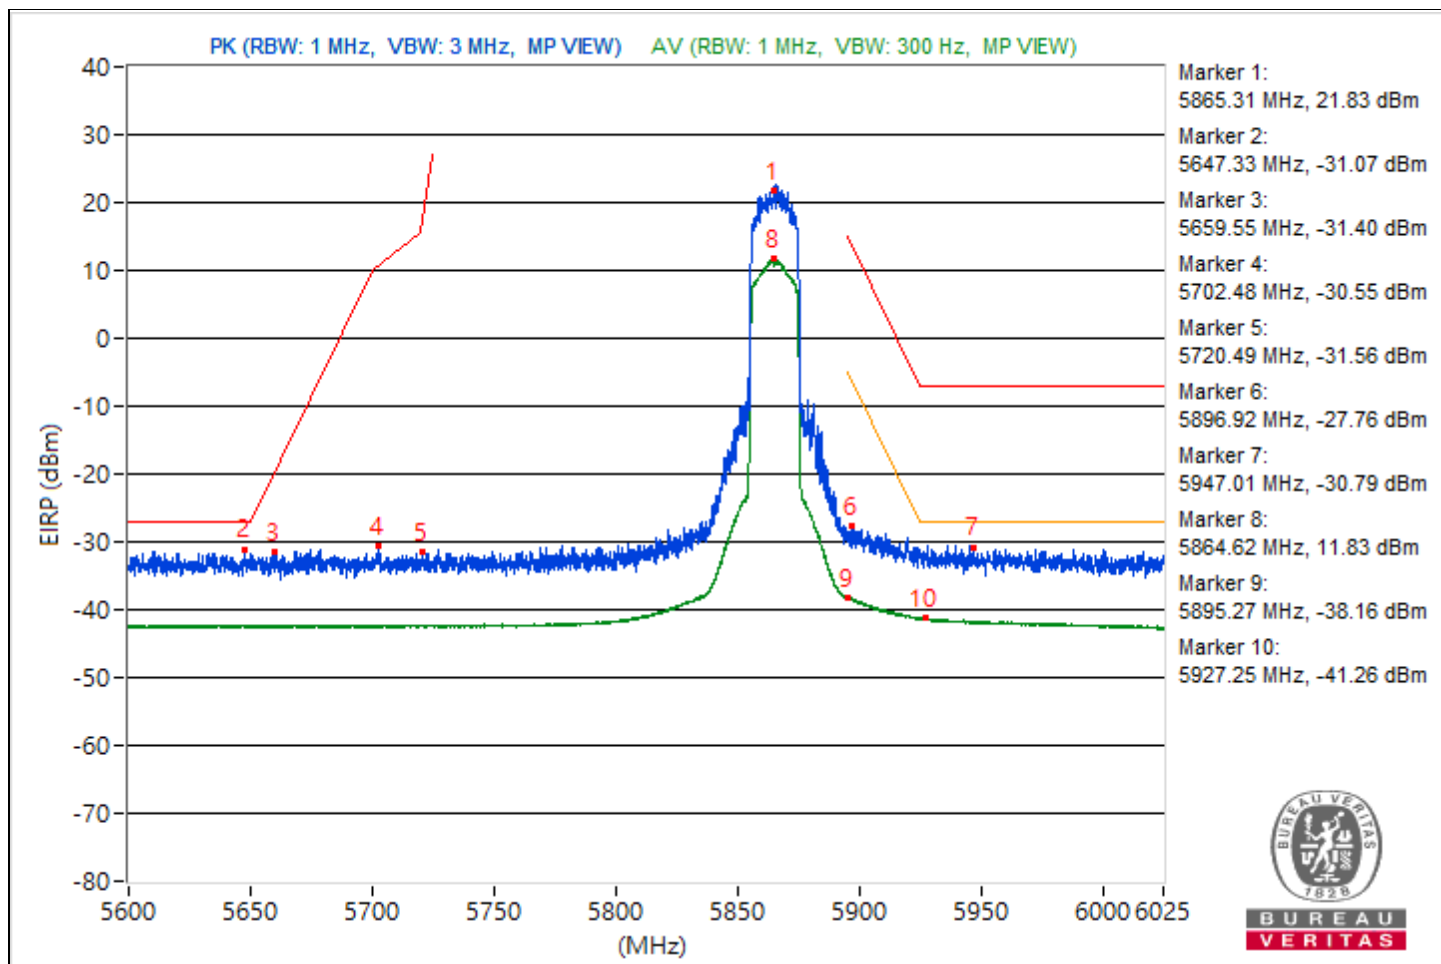


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5887.03	115.96 PK			10.73	14.15	4.92	20.7
2	#5619.6	64.88 PK	68.26	-3.38	-39.03	-37.69	4.92	-30.38
3	#5649.99	63.17 PK	68.26	-5.09	-40.2	-39.85	4.92	-32.09
4	#5702.27	64.03 PK	105.9	-41.87	-38.36	-40.15	4.92	-31.23
5	#5720.01	63.54 PK	110.88	-47.34	-38.7	-40.88	4.92	-31.72
6	#5895	100.68 PK	110.26	-9.58	-2.94	-2.12	4.92	5.42
7	#5938.51	65.14 PK	88.26	-23.12	-39.56	-36.93	4.92	-30.12
8	*5884.17	104.26 AV			0.82	1.3	4.92	9
9	#5895	89.66 AV	90.26	-0.6	-13.7	-13.37	4.92	-5.6
10	#5929.48	53.57 AV	68.26	-14.69	-49.73	-49.52	4.92	-41.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

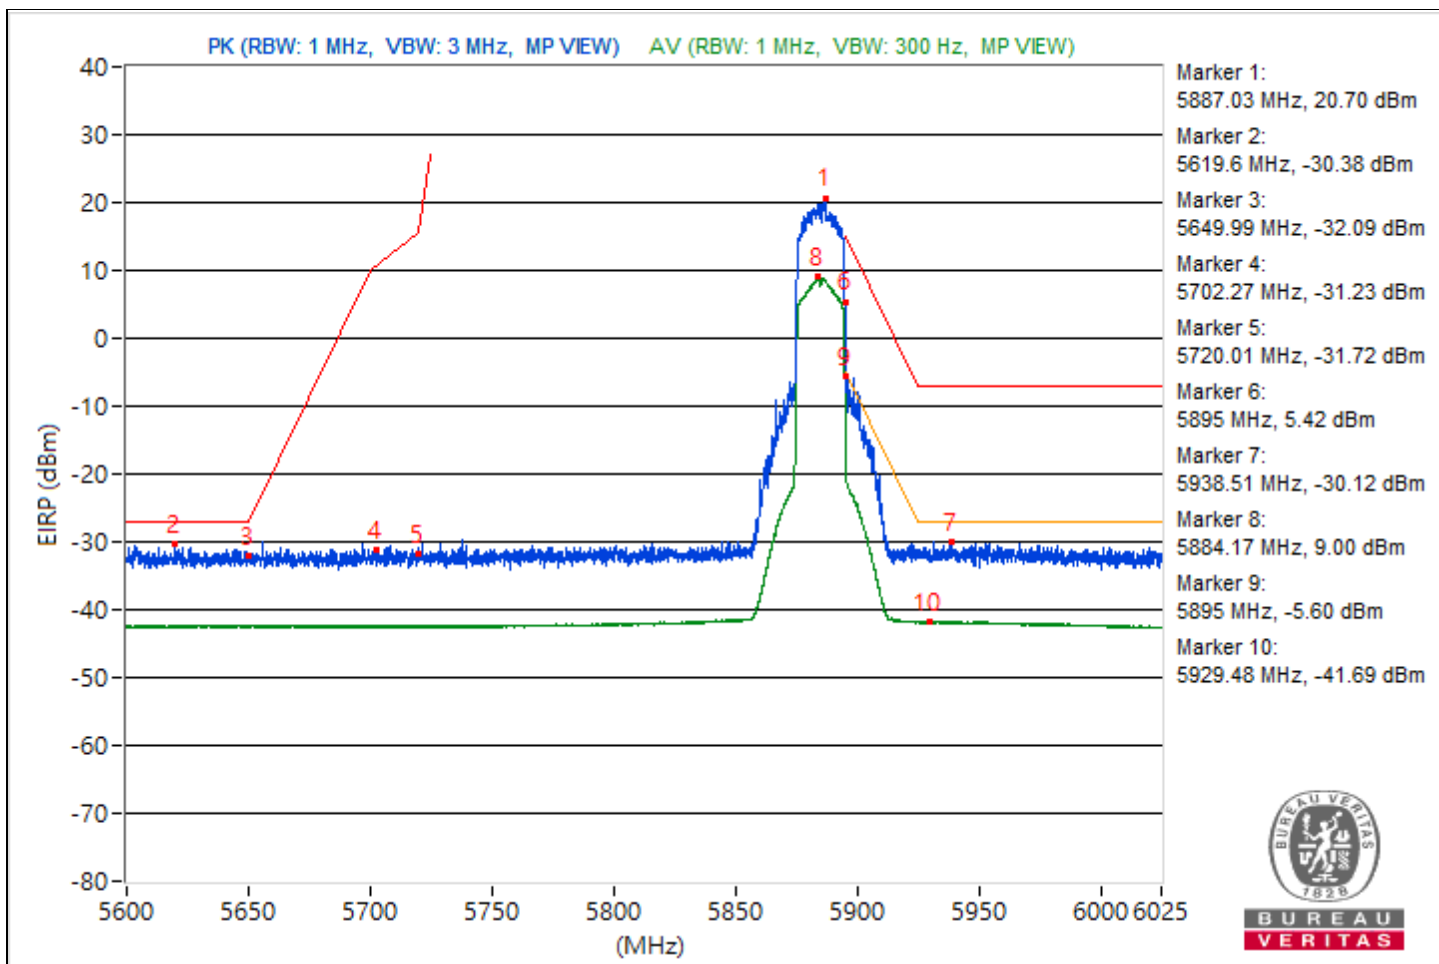


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.67	117.9 PK			12.72	16.07	4.92	22.64
2	#5644.84	63.1 PK	68.26	-5.16	-38.69	-42.16	4.92	-32.16
3	#5655.89	63.83 PK	72.62	-8.79	-38.05	-41.24	4.92	-31.43
4	#5719.48	63.85 PK	110.71	-46.86	-40.85	-38.23	4.92	-31.41
5	#5723.89	64.89 PK	119.73	-54.84	-36.95	-40.25	4.92	-30.37
6	#5895	71.05 PK	110.26	-39.21	-36.62	-29.99	4.92	-24.21
7	#5933.47	65.95 PK	88.26	-22.31	-38.29	-36.4	4.92	-29.31
8	*5834.33	107.41 AV			4.03	4.39	4.92	12.15
9	#5895.11	58.04 AV	90.18	-32.14	-45.39	-44.92	4.92	-37.22
10	#5926.4	55.57 AV	68.26	-12.69	-47.7	-47.55	4.92	-39.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

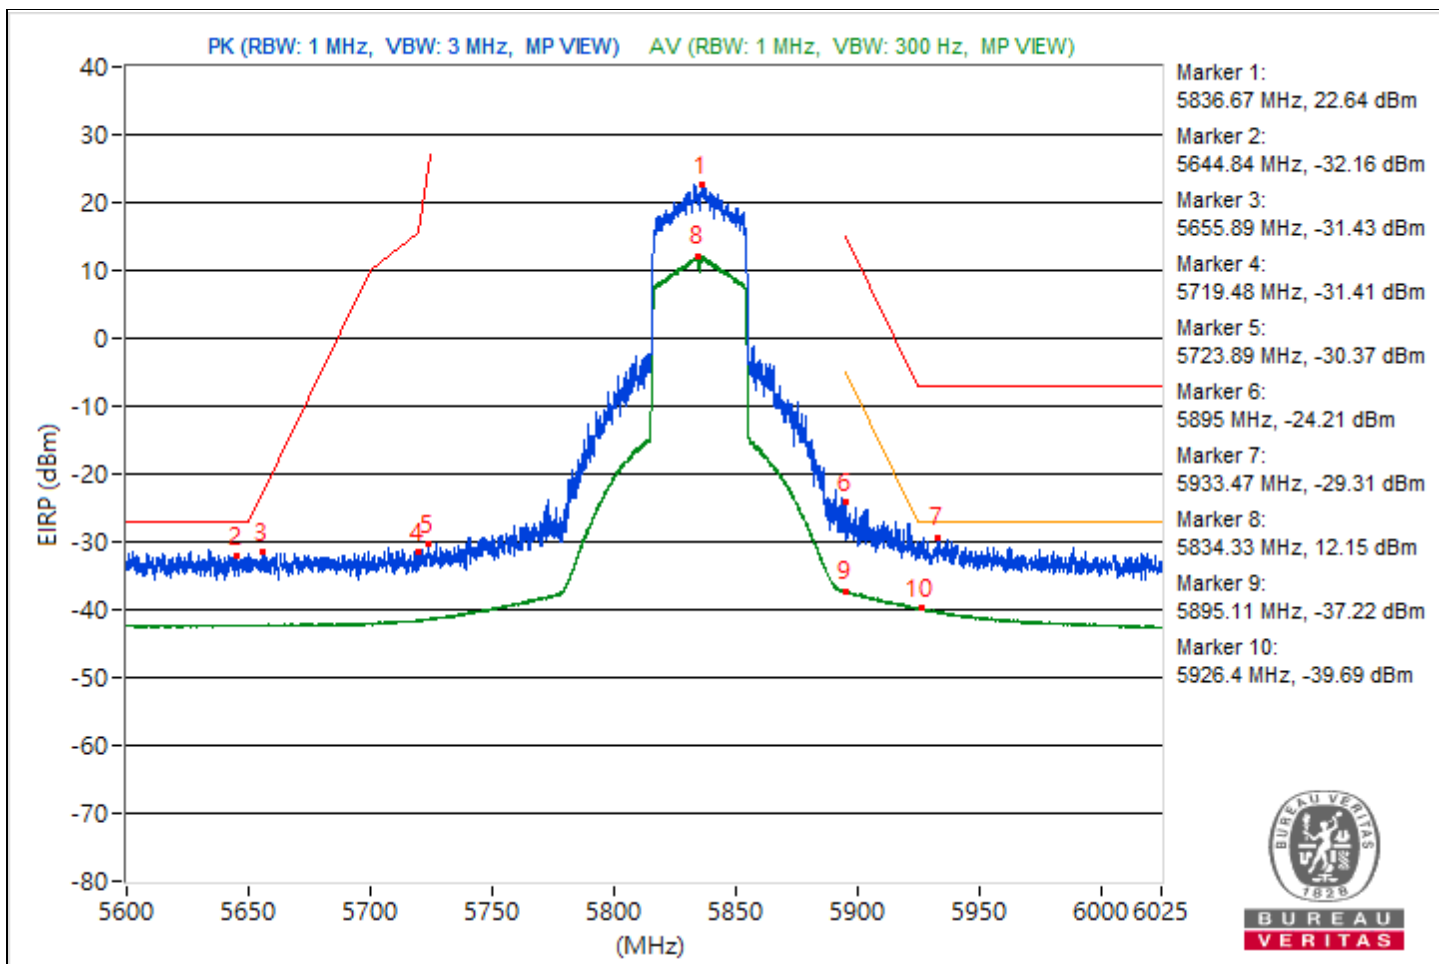


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5872	118.34 PK			13.64	16.27	4.92	23.08
2	#5623.48	64.15 PK	68.26	-4.11	-40.84	-37.77	4.92	-31.11
3	#5698.18	63.71 PK	103.91	-40.2	-38.34	-41.02	4.92	-31.55
4	#5712.04	64.13 PK	108.63	-44.5	-37.27	-42.15	4.92	-31.13
5	#5723.62	63 PK	119.11	-56.11	-38.74	-42.37	4.92	-32.26
6	#5895	98.52 PK	110.26	-11.74	-4.26	-5.13	4.92	3.26
7	#5925.76	77.73 PK	88.26	-10.53	-27.26	-24.2	4.92	-17.53
8	*5876.68	107.46 AV			4.17	4.36	4.92	12.2
9	#5895	88.48 AV	90.26	-1.78	-14.34	-15.11	4.92	-6.78
10	#5925	65.71 AV	68.26	-2.55	-38.06	-36.96	4.92	-29.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

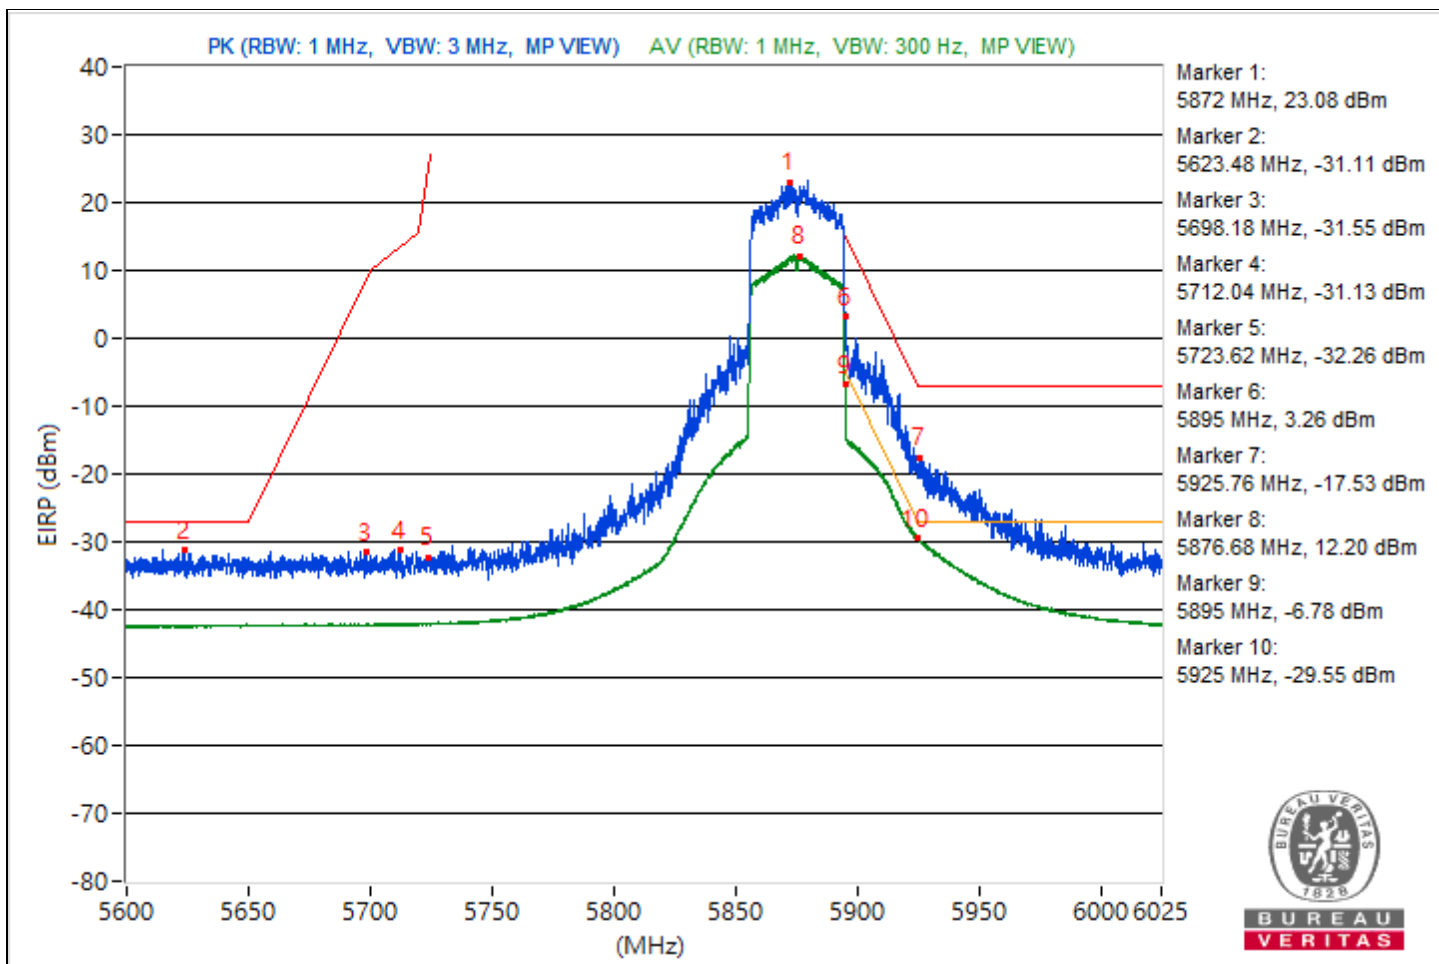


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5864.19	116.15 PK			10	14.7	4.92	20.89
2	#5613.87	64.96 PK	68.26	-3.3	-39.83	-37.06	4.92	-30.3
3	#5686.49	66.62 PK	95.26	-28.64	-39.98	-34.68	4.92	-28.64
4	#5711.77	66.11 PK	108.56	-42.45	-39.06	-35.73	4.92	-29.15
5	#5723.09	66.4 PK	117.91	-51.51	-39.49	-35.13	4.92	-28.86
6	#5895	96.78 PK	110.26	-13.48	-7.05	-5.86	4.92	1.52
7	#5936.44	76.94 PK	88.26	-11.32	-30.26	-24.21	4.92	-18.32
8	*5854.47	103.74 AV			0.11	0.95	4.92	8.48
9	#5895	85.32 AV	90.26	-4.94	-18.29	-17.49	4.92	-9.94
10	#5925.23	64.34 AV	68.26	-3.92	-39.93	-37.99	4.92	-30.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

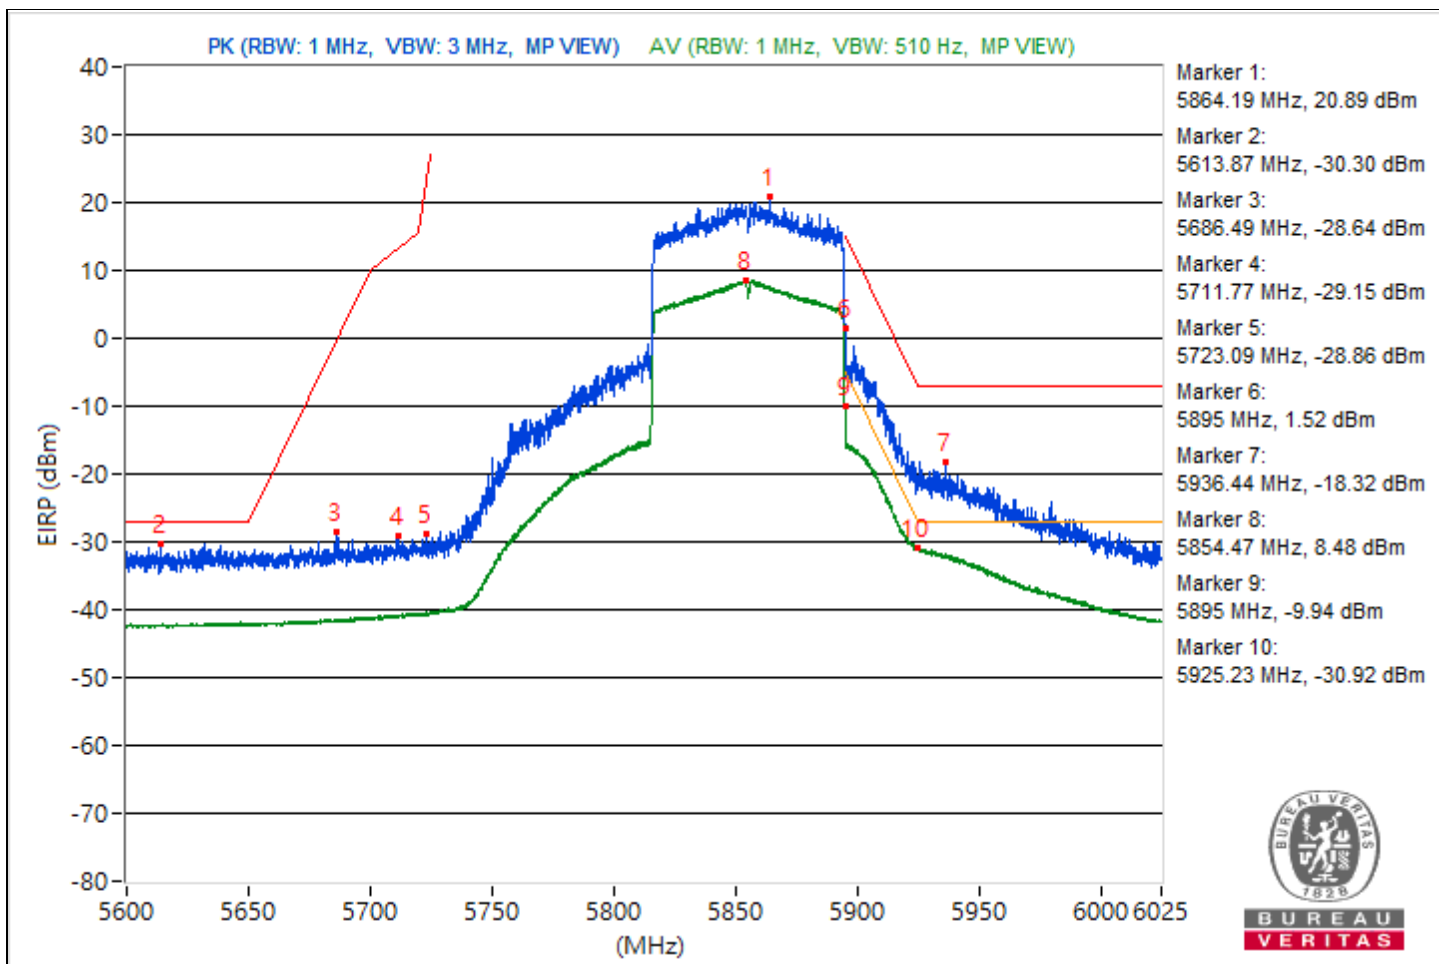


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5826.95	109.43 PK			4.41	7.52	4.92	14.17
2	#5640.32	67.48 PK	68.26	-0.78	-33.74	-39.43	4.92	-27.78
3	#5699.77	68.65 PK	105.09	-36.44	-33.15	-36.59	4.92	-26.61
4	#5707.79	68.29 PK	107.44	-39.15	-35.49	-34.39	4.92	-26.97
5	#5721.87	68.89 PK	115.12	-46.23	-32.41	-37.71	4.92	-26.37
6	#5895	90.81 PK	110.26	-19.45	-13.25	-11.65	4.92	-4.45
7	#5951.48	69.89 PK	88.26	-18.37	-35	-32.08	4.92	-25.37
8	*5818.87	98.29 AV			-4.81	-4.99	4.92	3.03
9	#5895	79.88 AV	90.26	-10.38	-23.66	-22.98	4.92	-15.38
10	#5926.72	59.55 AV	68.26	-8.71	-43.43	-43.86	4.92	-35.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

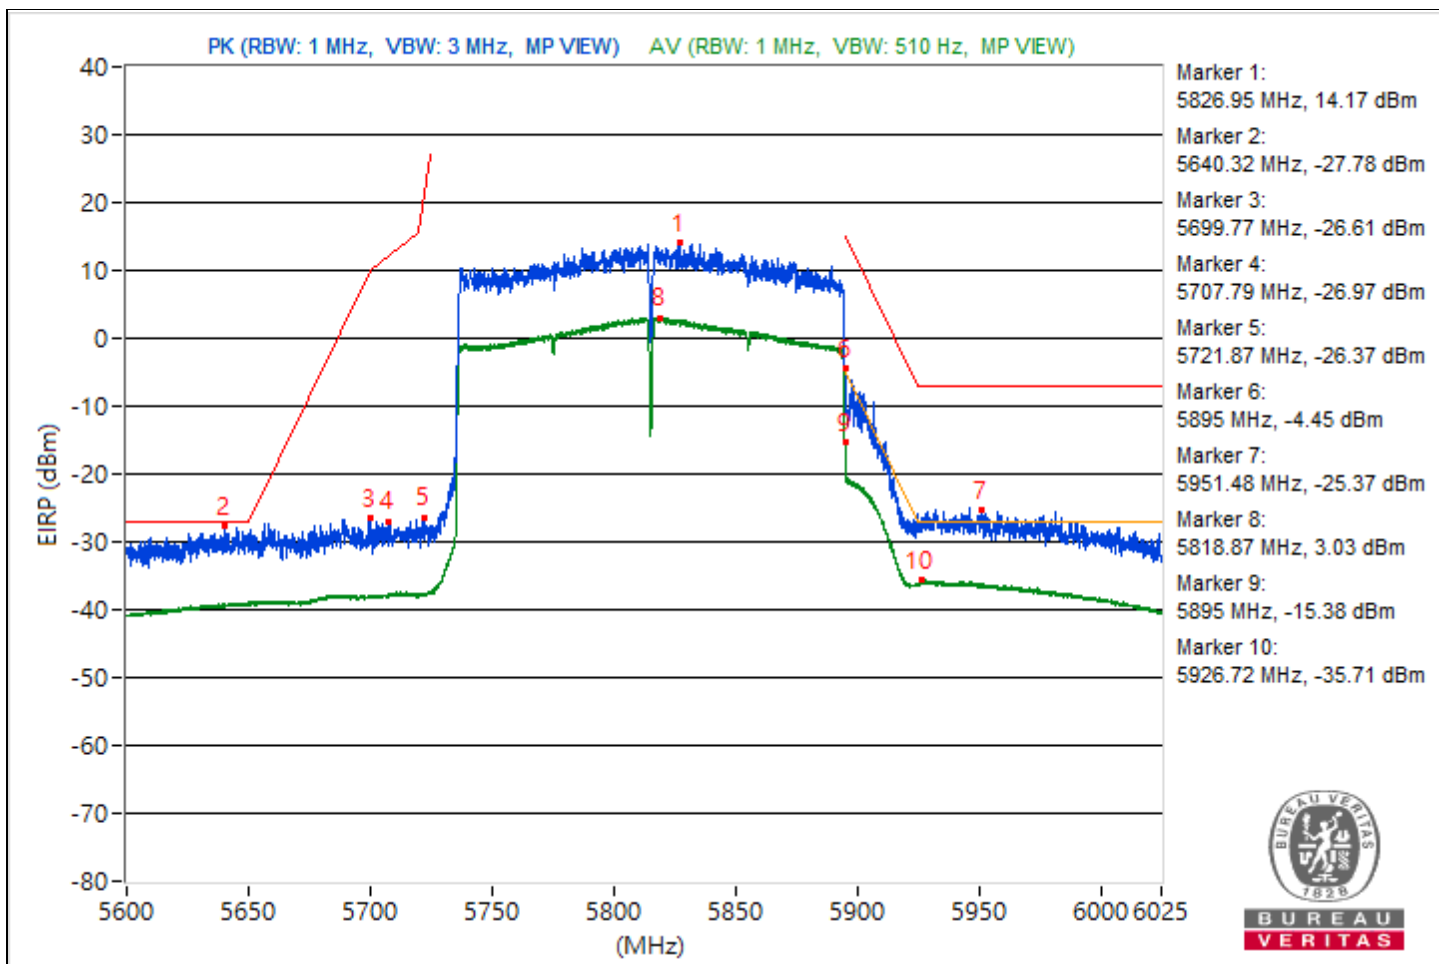


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5837.57	117.75 PK			15.14	13.88	4.92	22.49
2	#5630.12	64.73 PK	68.26	-3.53	-41.16	-36.81	4.92	-30.53
3	#5669.75	64.4 PK	82.87	-18.47	-37.82	-40.05	4.92	-30.86
4	#5708.22	63.99 PK	107.56	-43.57	-38.1	-40.7	4.92	-31.27
5	#5721.82	63.61 PK	115.01	-51.4	-39.2	-39.99	4.92	-31.65
6	#5899.41	64.86 PK	107.03	-42.17	-39.47	-37.42	4.92	-30.4
7	#6024.04	64.6 PK	88.26	-23.66	-37.18	-40.72	4.92	-30.66
8	*5836.73	107.8 AV			4.24	4.94	4.92	12.54
9	#5897.82	53.88 AV	88.19	-34.31	-49.14	-49.49	4.92	-41.38
10	#5937.56	53.85 AV	68.26	-14.41	-49.2	-49.5	4.92	-41.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

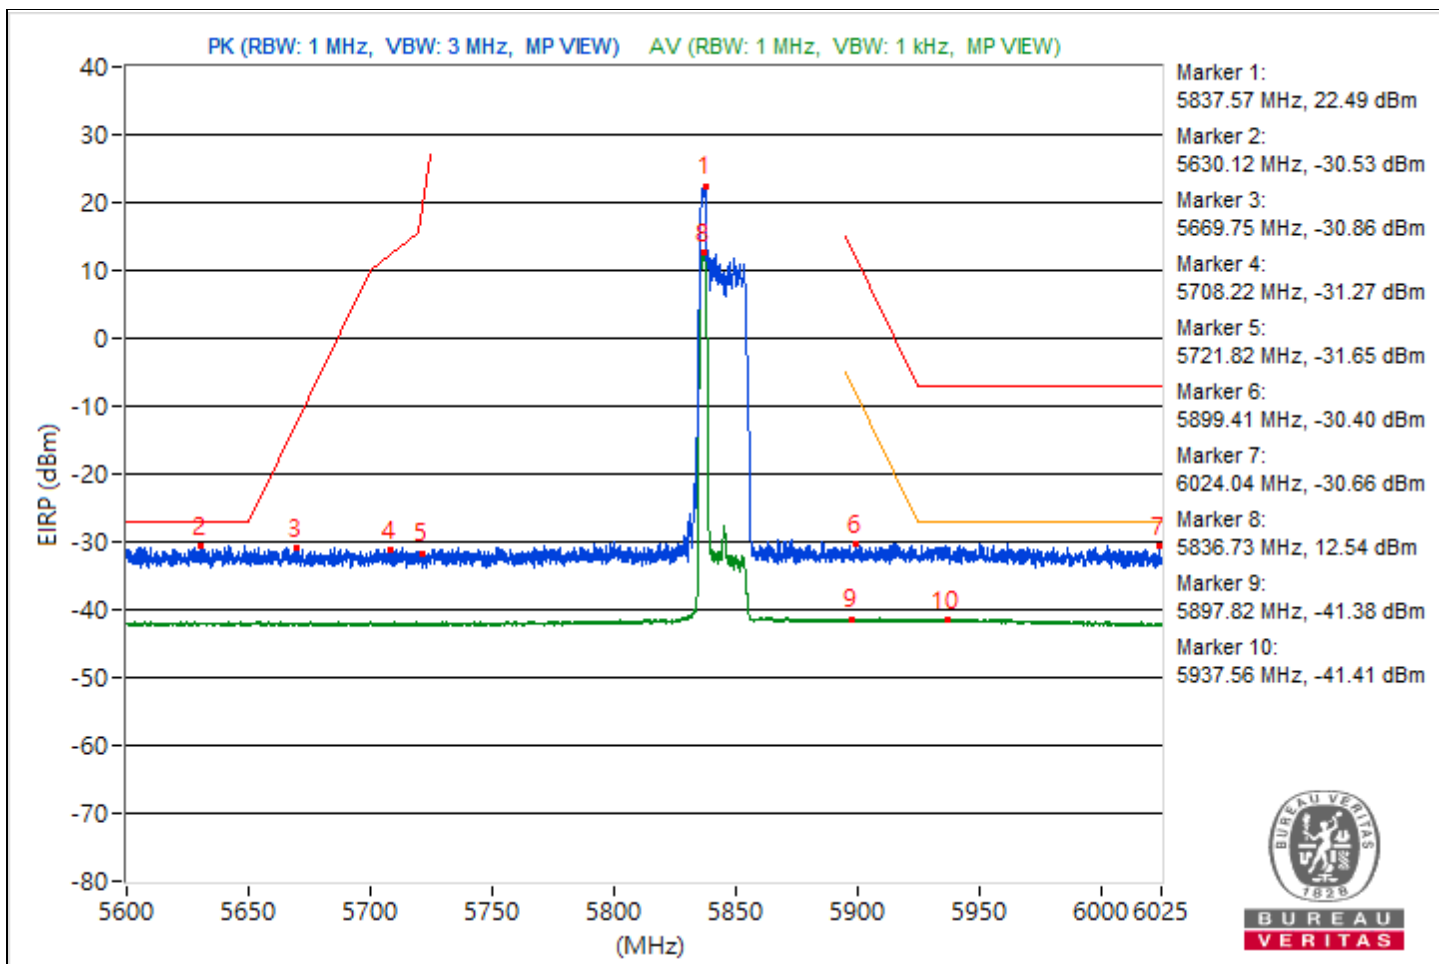


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5856.7	117.49 PK			13.78	14.77	4.92	22.23
2	#5644.09	64.56 PK	68.26	-3.7	-40.04	-37.56	4.92	-30.7
3	#5688.29	64.55 PK	96.59	-32.04	-39.21	-38.13	4.92	-30.71
4	#5703.27	64.58 PK	106.18	-41.6	-36.86	-41.61	4.92	-30.68
5	#5720.06	64.06 PK	111	-46.94	-39.79	-38.56	4.92	-31.2
6	#5895.85	65.49 PK	109.64	-44.15	-37.26	-38.19	4.92	-29.77
7	#5932.35	66.2 PK	88.26	-22.06	-38.17	-36.07	4.92	-29.06
8	*5856.91	107.48 AV			3.78	4.75	4.92	12.22
9	#5904.57	53.98 AV	83.24	-29.26	-49.02	-49.42	4.92	-41.28
10	#5931.82	53.98 AV	68.26	-14.28	-49.32	-49.11	4.92	-41.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

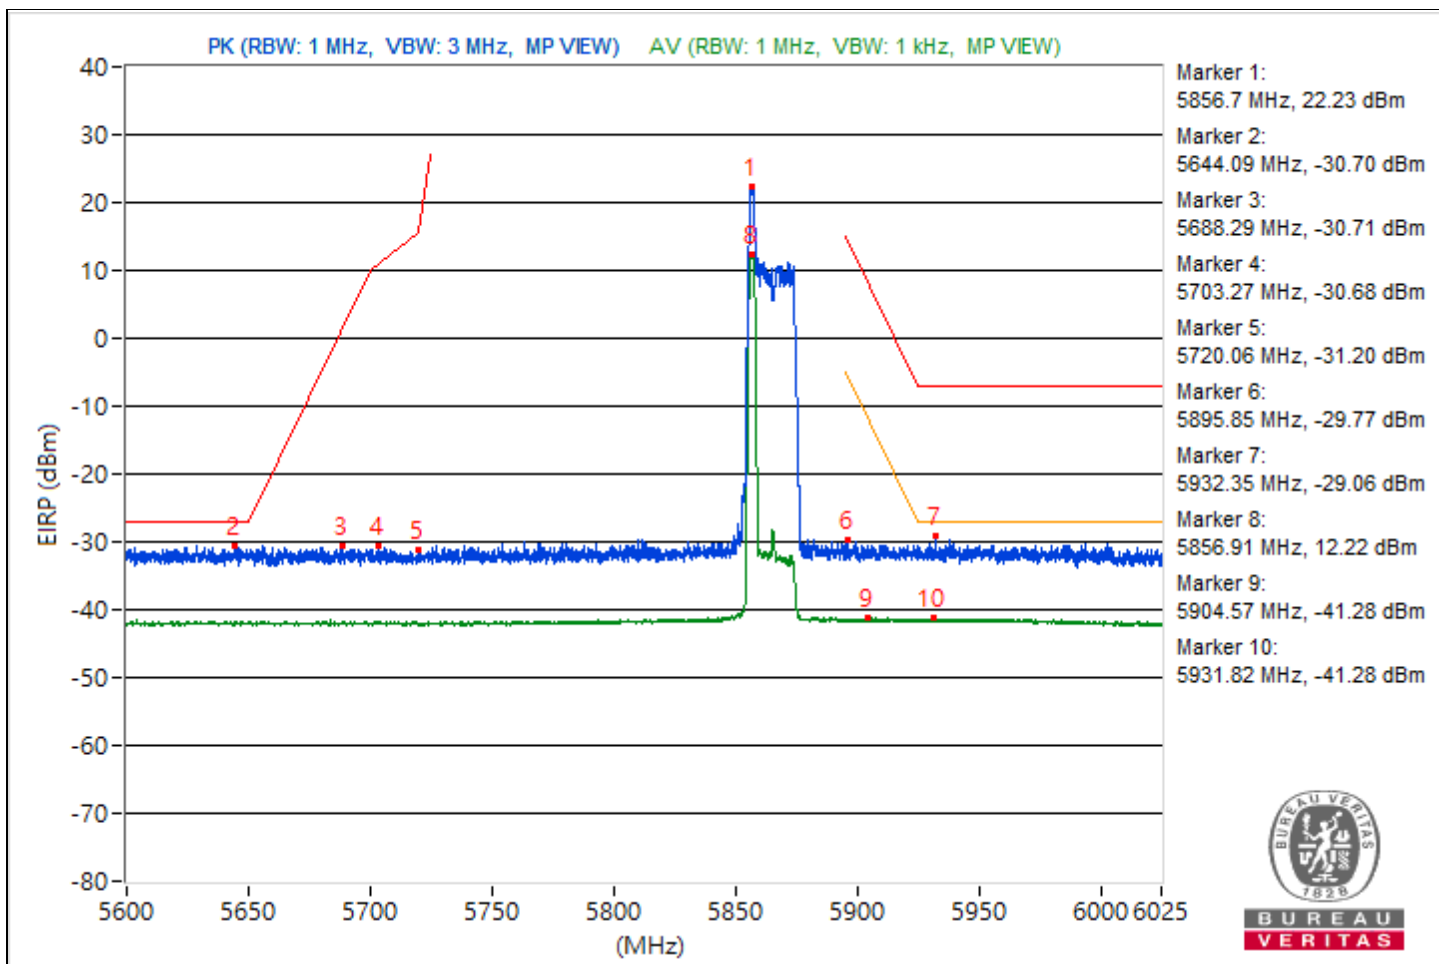




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5893.41	113.62 PK			9.7	11.06	4.92	18.36
2	#5610.09	64.49 PK	68.26	-3.77	-40.38	-37.5	4.92	-30.77
3	#5650.47	63.88 PK	68.61	-4.73	-39	-39.63	4.92	-31.38
4	#5700.09	64.06 PK	105.29	-41.23	-38.82	-39.47	4.92	-31.2
5	#5720.01	63.68 PK	110.88	-47.2	-40.07	-39.02	4.92	-31.58
6	#5895	101.88 PK	110.26	-8.38	-2.21	-0.57	4.92	6.62
7	#5946.22	65.37 PK	88.26	-22.89	-36.8	-39.17	4.92	-29.89
8	*5893.41	102.77 AV			-0.64	-0.21	4.92	7.51
9	#5895	89.94 AV	90.26	-0.32	-13.56	-12.97	4.92	-5.32
10	#5928.05	53.7 AV	68.26	-14.56	-49.72	-49.27	4.92	-41.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

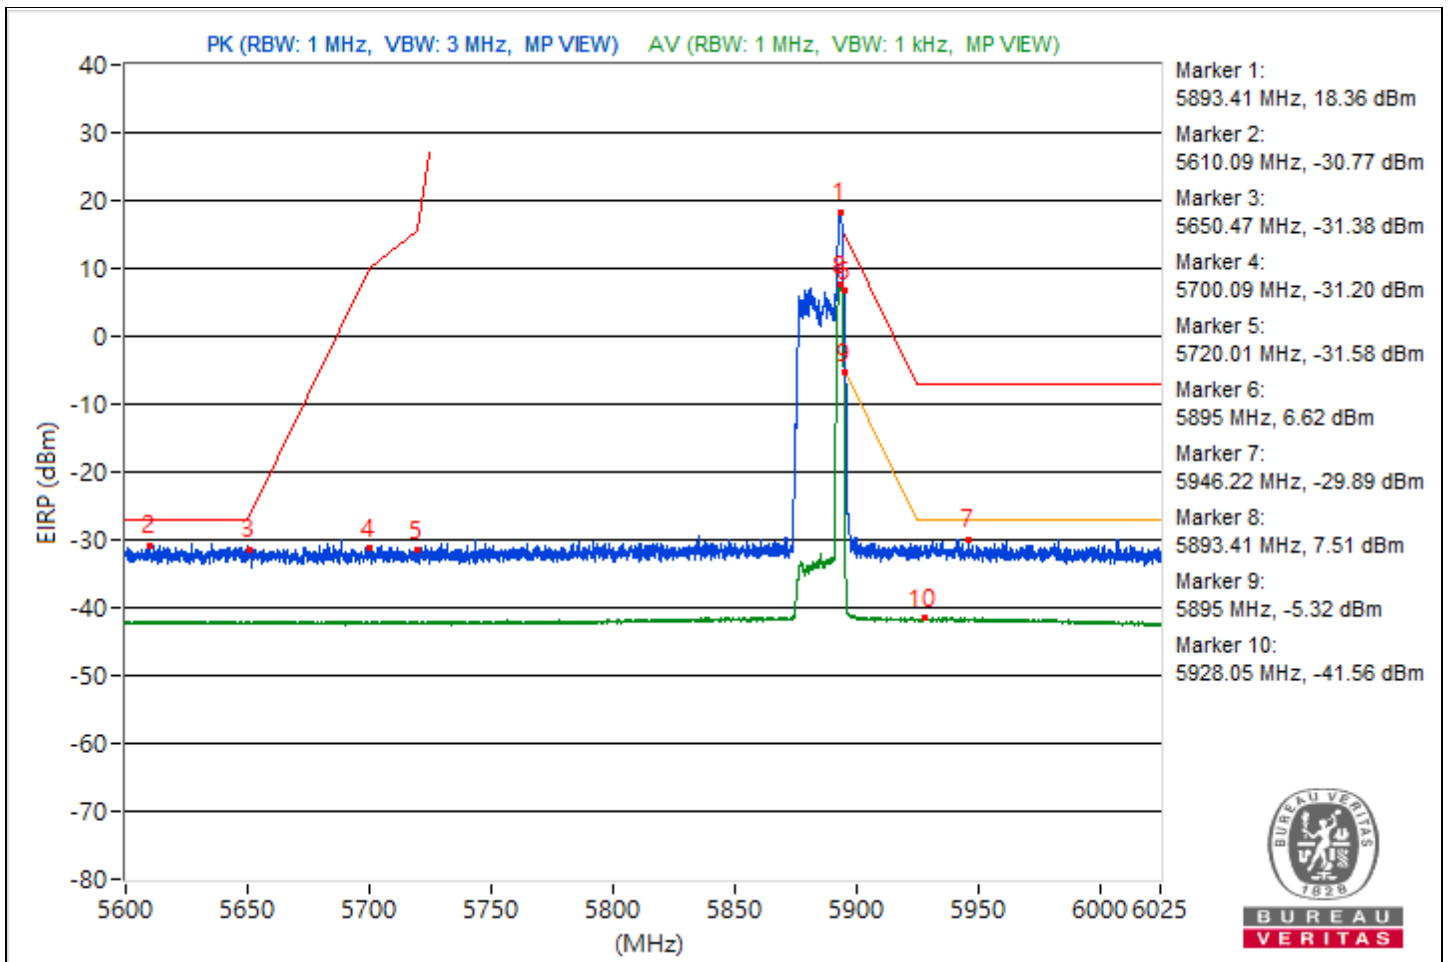


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5836.88	118.71 PK			15.83	15.18	4.92	23.45
2	#5641.38	64.68 PK	68.26	-3.58	-37.94	-39.18	4.92	-30.58
3	#5687.07	65.11 PK	95.69	-30.58	-37.27	-39.08	4.92	-30.15
4	#5719.27	65.37 PK	110.66	-45.29	-37.83	-37.82	4.92	-29.89
5	#5724.95	64.87 PK	122.15	-57.28	-37.19	-39.85	4.92	-30.39
6	#5897.23	65.43 PK	108.62	-43.19	-37.05	-38.62	4.92	-29.83
7	#5981.28	65.06 PK	88.26	-23.2	-36.84	-39.99	4.92	-30.2
8	*5838.48	107.51 AV			3.93	4.67	4.92	12.25
9	#5923.05	53.94 AV	69.69	-15.75	-48.99	-49.52	4.92	-41.32
10	#5929.48	53.82 AV	68.26	-14.44	-49.66	-49.09	4.92	-41.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

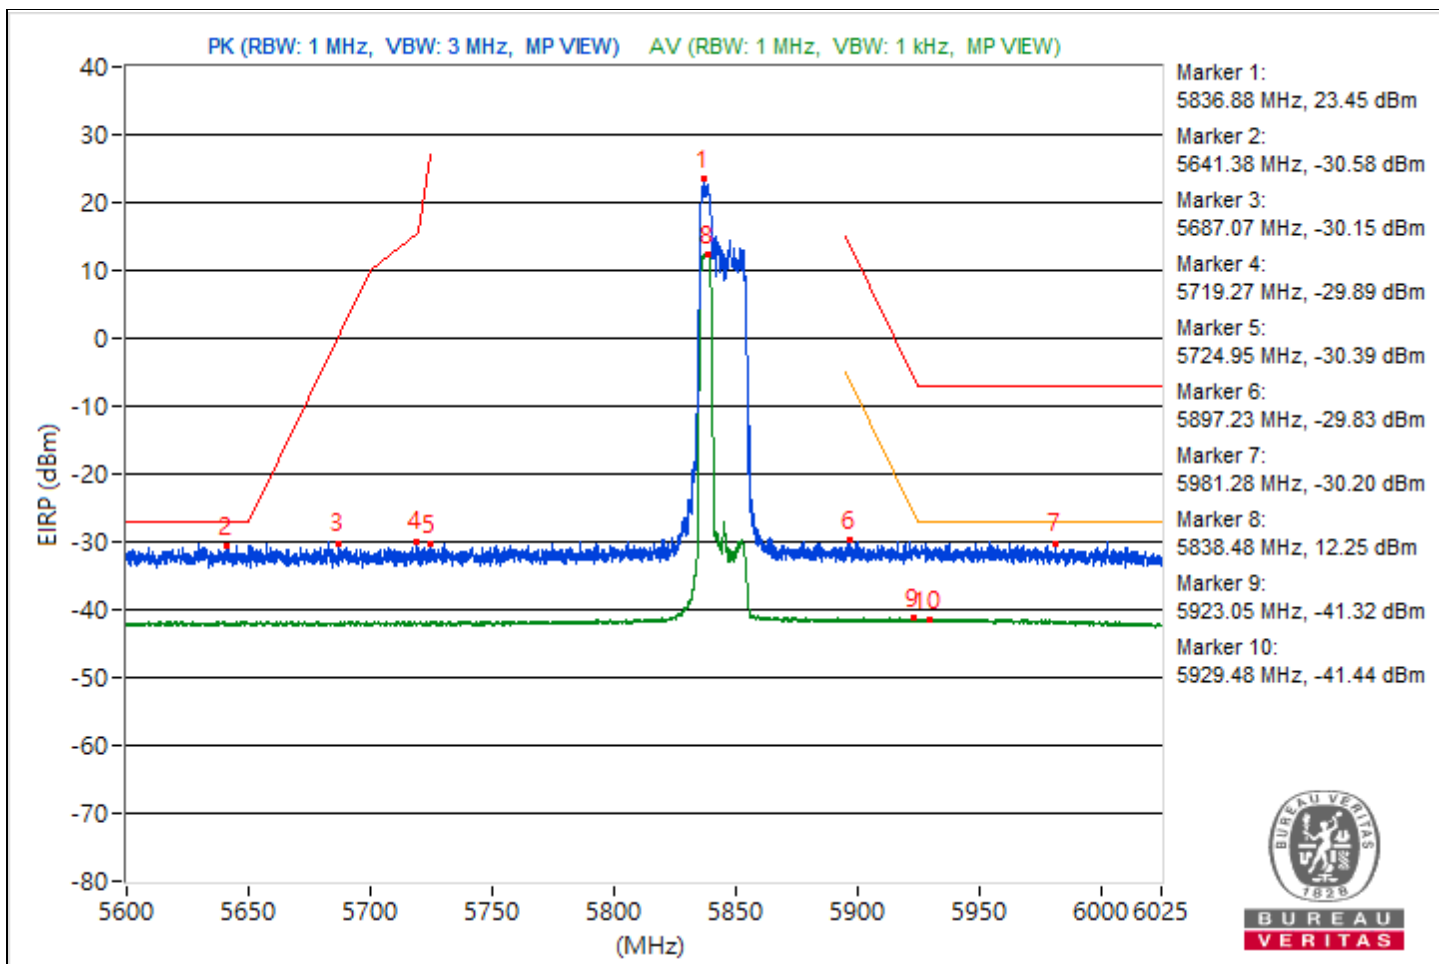


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5857.71	117.69 PK			15.73	12.76	4.92	22.43
2	#5625.5	64.99 PK	68.26	-3.27	-36.45	-41.17	4.92	-30.27
3	#5666.25	64.35 PK	80.28	-15.93	-39.69	-38.13	4.92	-30.91
4	#5700.73	64.57 PK	105.46	-40.89	-40.38	-37.38	4.92	-30.69
5	#5720	64.25 PK	110.86	-46.61	-38.69	-39.22	4.92	-31.01
6	#5917.05	64.89 PK	94.09	-29.2	-36.74	-40.74	4.92	-30.37
7	#5973.26	65.05 PK	88.26	-23.21	-37.01	-39.66	4.92	-30.21
8	*5857.87	107.46 AV			4	4.51	4.92	12.2
9	#5896.97	54.13 AV	88.82	-34.69	-48.79	-49.34	4.92	-41.13
10	#5938.09	54.08 AV	68.26	-14.18	-49.3	-48.93	4.92	-41.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

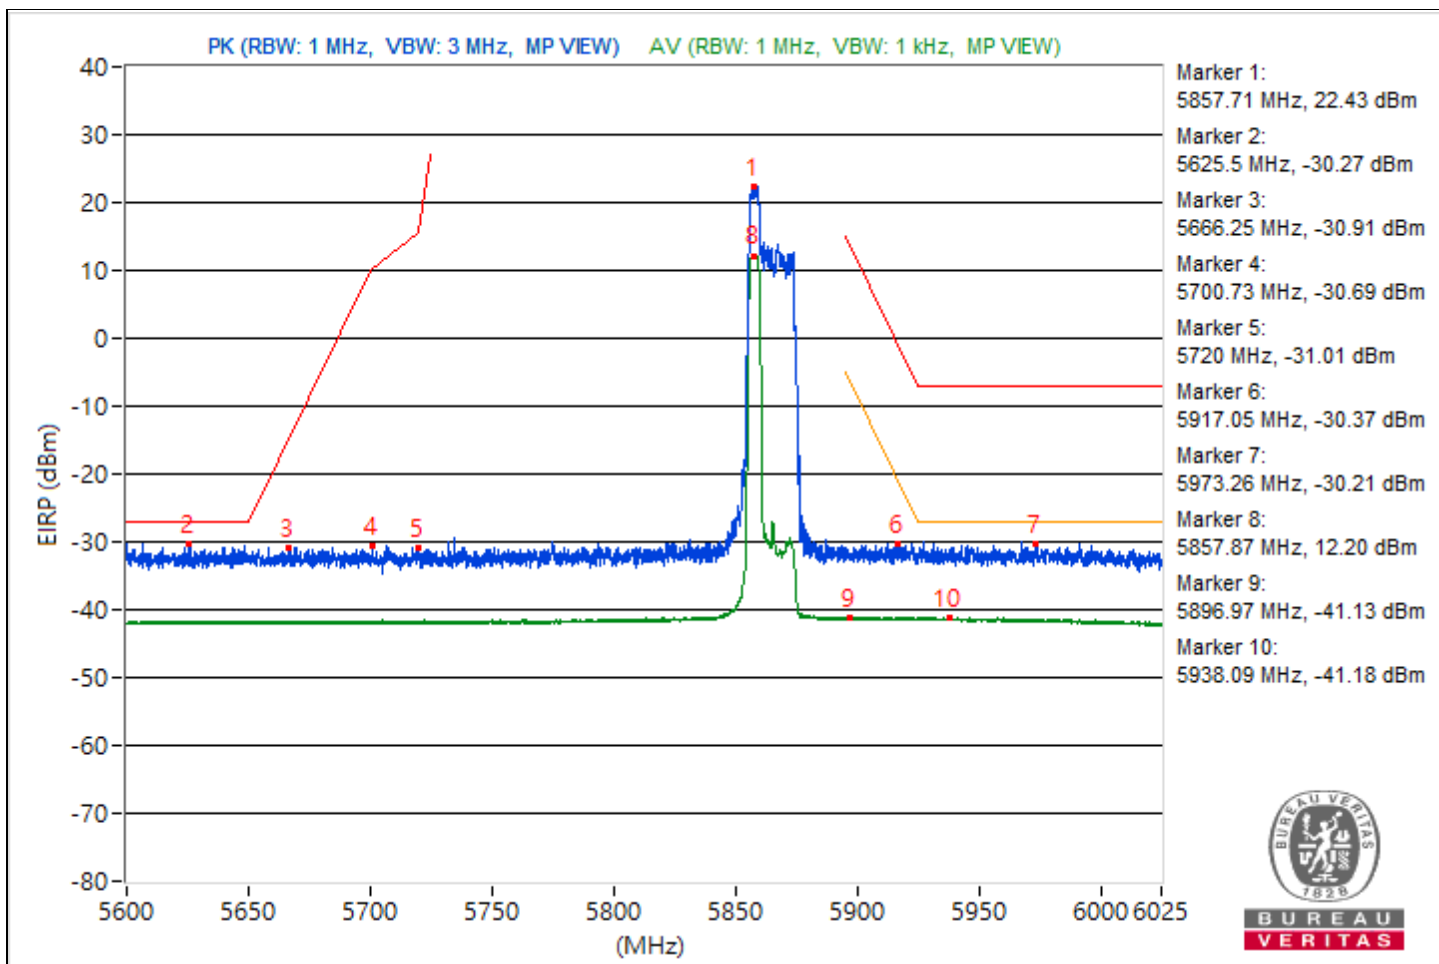


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5891.28	113.64 PK			8.32	11.88	4.92	18.38
2	#5619.6	65.06 PK	68.26	-3.2	-37.39	-39.02	4.92	-30.2
3	#5651.85	64.04 PK	69.63	-5.59	-39.41	-38.91	4.92	-31.22
4	#5700.73	63.94 PK	105.46	-41.52	-39.1	-39.4	4.92	-31.32
5	#5720.22	63.13 PK	111.36	-48.23	-41.18	-39.17	4.92	-32.13
6	#5895	103.58 PK	110.26	-6.68	-1.93	1.89	4.92	8.32
7	#6012.41	64.6 PK	88.26	-23.66	-41.14	-36.99	4.92	-30.66
8	*5893.2	102.4 AV			-1.28	-0.34	4.92	7.14
9	#5895	89.81 AV	90.26	-0.45	-13.71	-13.07	4.92	-5.45
10	#5941.06	53.85 AV	68.26	-14.41	-49.51	-49.17	4.92	-41.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

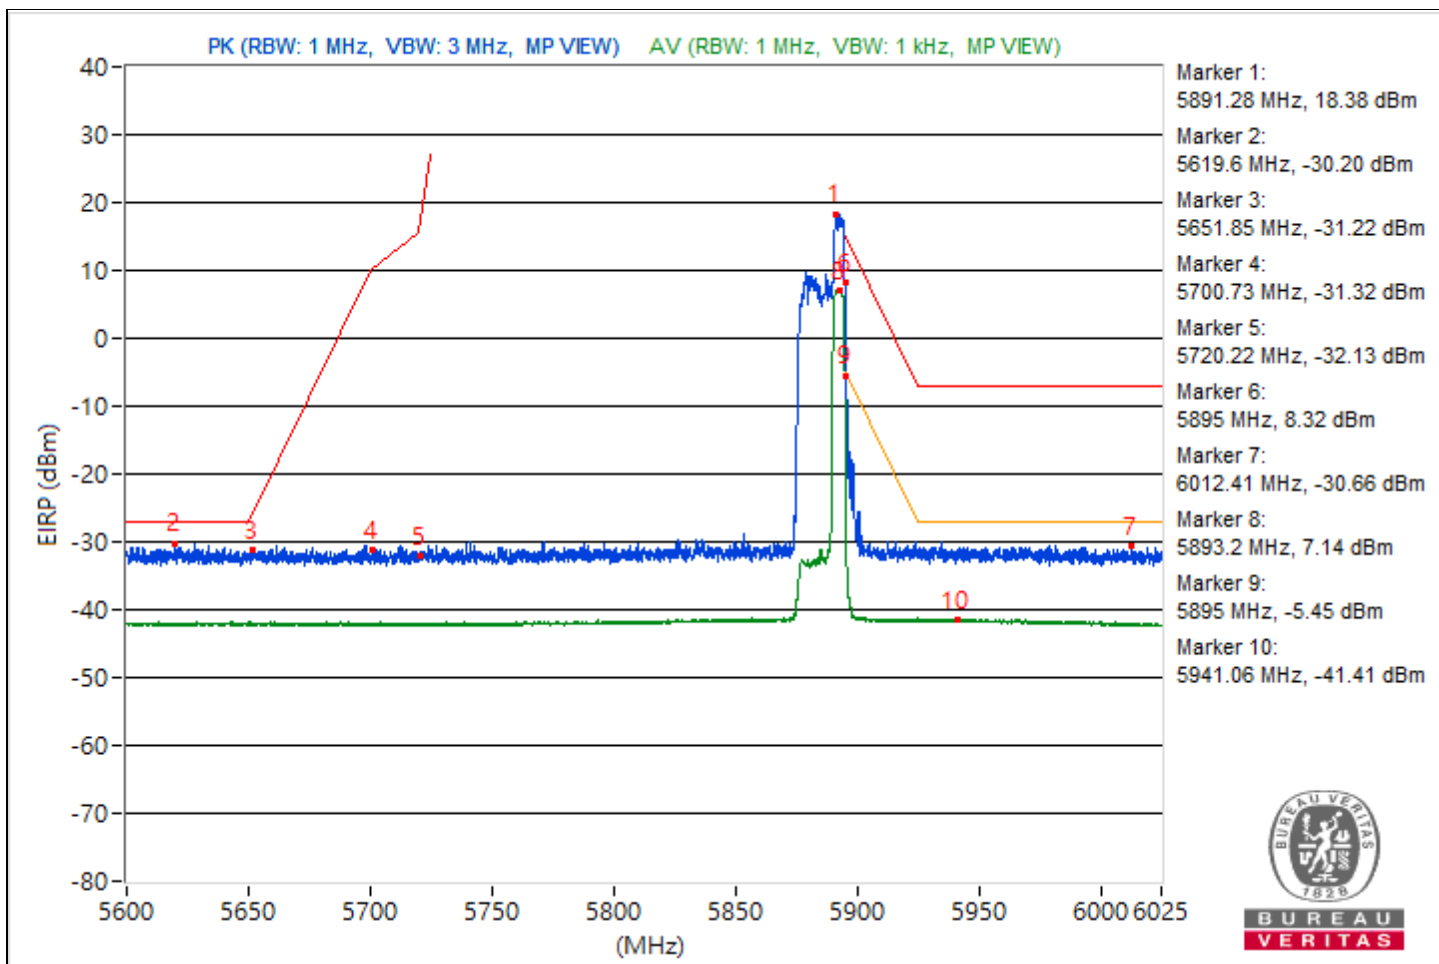


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5837.04	118.53 PK			15.6	15.06	4.92	23.27
2	#5625.18	64.3 PK	68.26	-3.96	-37.23	-41.61	4.92	-30.96
3	#5670.5	63.8 PK	83.43	-19.63	-37.34	-43.38	4.92	-31.46
4	#5719	64.05 PK	110.58	-46.53	-39.29	-39.01	4.92	-31.21
5	#5721.71	63.22 PK	114.76	-51.54	-38.36	-42.58	4.92	-32.04
6	#5914.45	64.68 PK	96	-31.32	-36.95	-40.99	4.92	-30.58
7	#5949.88	65.19 PK	88.26	-23.07	-38.02	-37.98	4.92	-30.07
8	*5837.84	106.83 AV			3.95	3.3	4.92	11.57
9	#5907.38	53.69 AV	81.18	-27.49	-49.1	-49.96	4.92	-41.57
10	#5925.18	53.59 AV	68.26	-14.67	-49.37	-49.84	4.92	-41.67

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

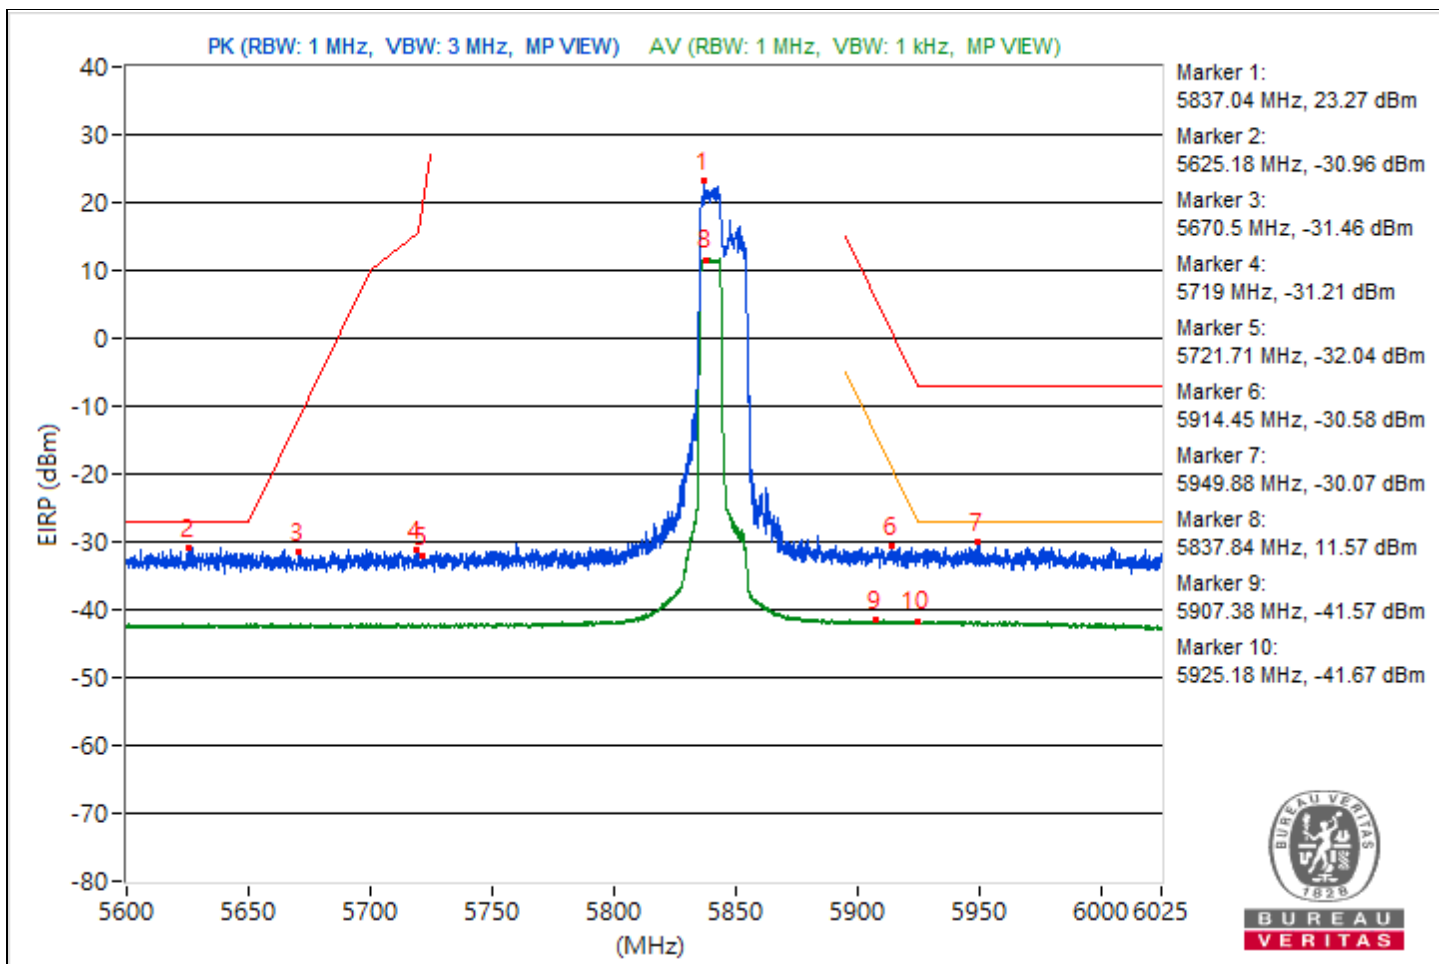


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5860.1	118.08 PK			13.51	15.93	4.92	22.82
2	#5636.18	64.03 PK	68.26	-4.23	-37.7	-41.38	4.92	-31.23
3	#5687.55	63.81 PK	96.05	-32.24	-37.72	-42.11	4.92	-31.45
4	#5715.23	65.09 PK	109.52	-44.43	-37.3	-39.08	4.92	-30.17
5	#5724.74	63.87 PK	121.67	-57.8	-38.85	-39.85	4.92	-31.39
6	#5895	65.36 PK	110.26	-44.9	-36.46	-39.86	4.92	-29.9
7	#5936.55	64.86 PK	88.26	-23.4	-36.89	-40.5	4.92	-30.4
8	*5860.52	107.29 AV			4.35	3.83	4.92	12.03
9	#5895.22	54.01 AV	90.1	-36.09	-48.79	-49.62	4.92	-41.25
10	#5945.58	53.67 AV	68.26	-14.59	-48.91	-50.23	4.92	-41.59

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

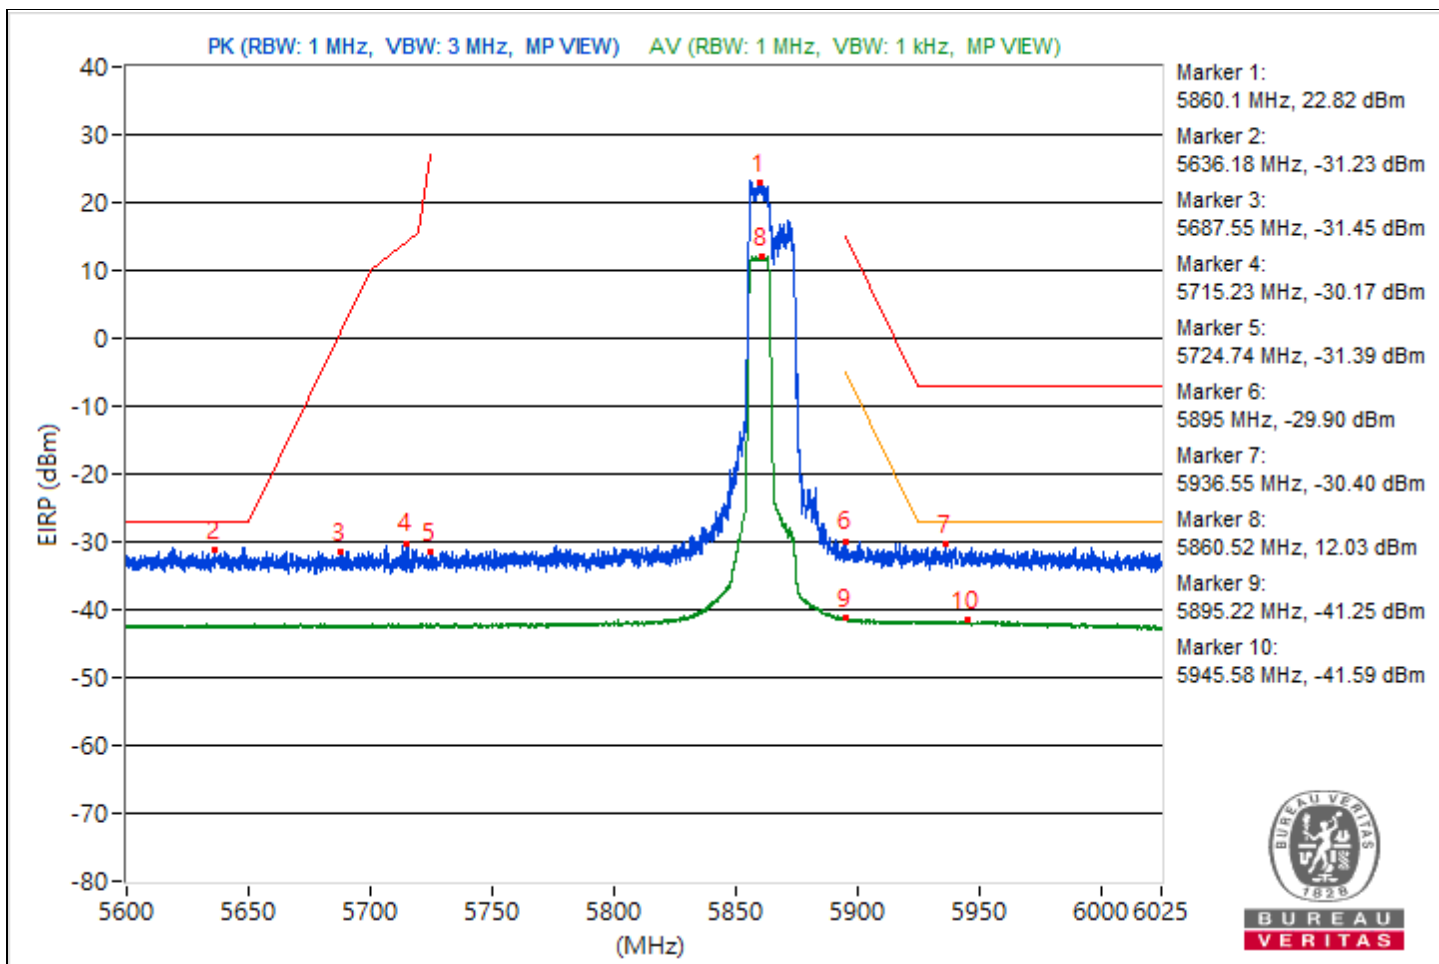


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5887.88	112.65 PK			10.84	7.41	4.92	17.39
2	#5600.37	64.78 PK	68.26	-3.48	-40.99	-36.8	4.92	-30.48
3	#5650.84	64.71 PK	68.88	-4.17	-37.94	-39.11	4.92	-30.55
4	#5702.27	64.08 PK	105.9	-41.82	-39.56	-38.7	4.92	-31.18
5	#5720.17	63.48 PK	111.25	-47.77	-39.46	-39.97	4.92	-31.78
6	#5895	102.04 PK	110.26	-8.22	-1.37	-0.94	4.92	6.78
7	#5967.78	65.27 PK	88.26	-22.99	-37.14	-38.88	4.92	-29.99
8	*5891.44	101.07 AV			-2.56	-1.71	4.92	5.81
9	#5895	90.21 AV	90.26	-0.05	-13.22	-12.75	4.92	-5.05
10	#5945.15	53.76 AV	68.26	-14.5	-49.55	-49.3	4.92	-41.5

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

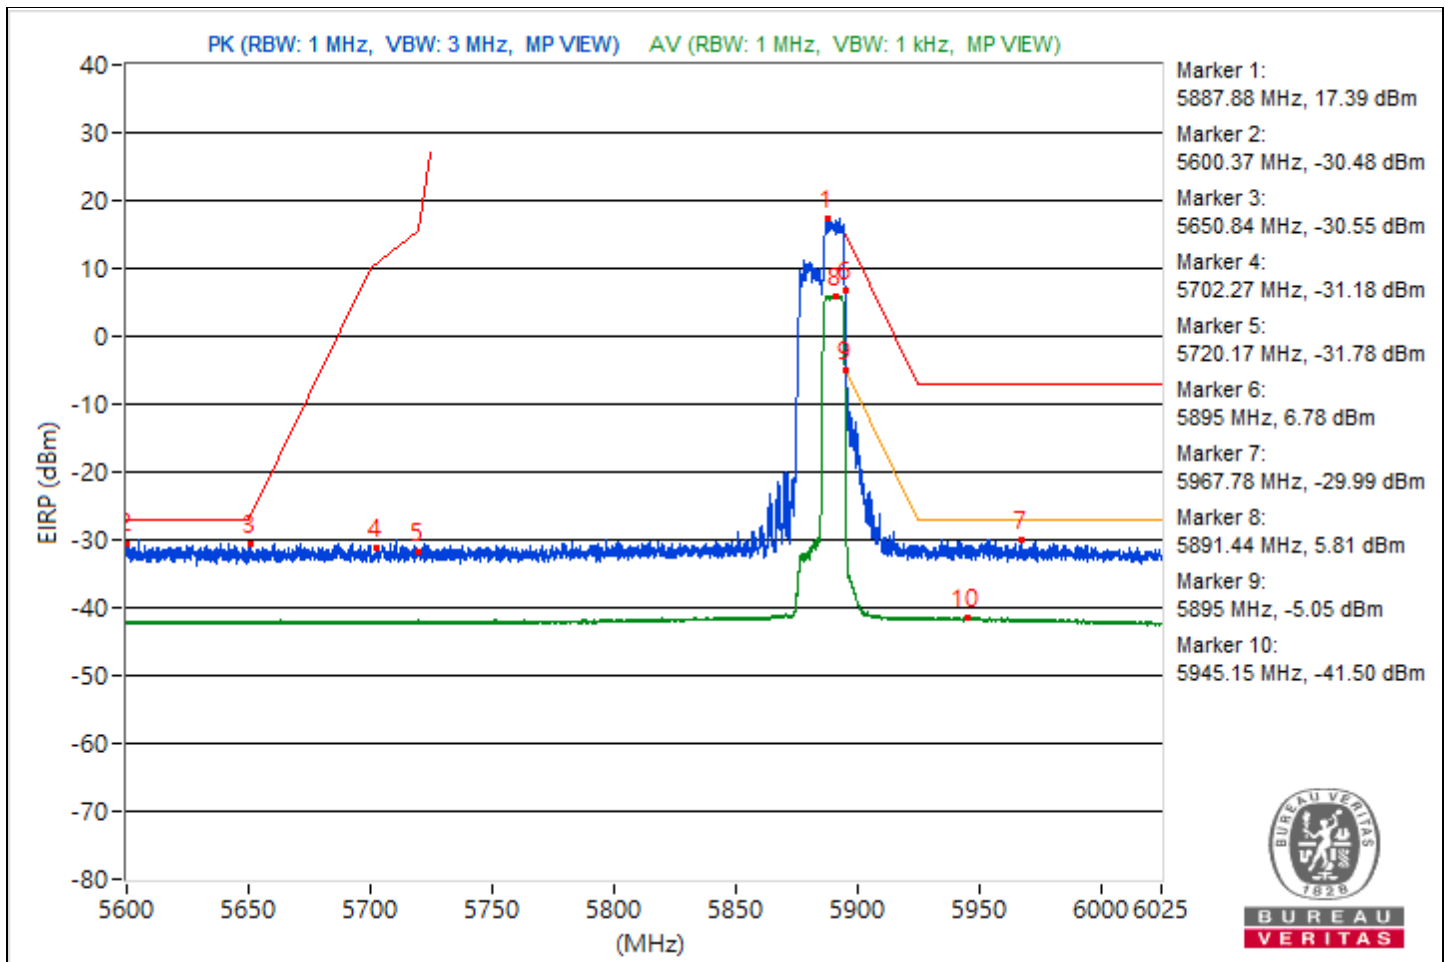


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5842.3	118.37 PK			12.69	16.75	4.92	23.11
2	#5623.43	64.71 PK	68.26	-3.55	-36.95	-40.89	4.92	-30.55
3	#5670.5	64.29 PK	83.43	-19.14	-37.35	-41.35	4.92	-30.97
4	#5719.8	64.57 PK	110.8	-46.23	-37.17	-40.8	4.92	-30.69
5	#5724.84	63.77 PK	121.9	-58.13	-38.06	-41.42	4.92	-31.49
6	#5923.85	65.04 PK	89.1	-24.06	-36.76	-40.22	4.92	-30.22
7	#5983.24	64.29 PK	88.26	-23.97	-40.97	-37.51	4.92	-30.97
8	*5842.89	107.37 AV			3.92	4.42	4.92	12.11
9	#5915.62	53.66 AV	75.14	-21.48	-49.63	-49.44	4.92	-41.6
10	#5928.95	53.64 AV	68.26	-14.62	-49.51	-49.58	4.92	-41.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

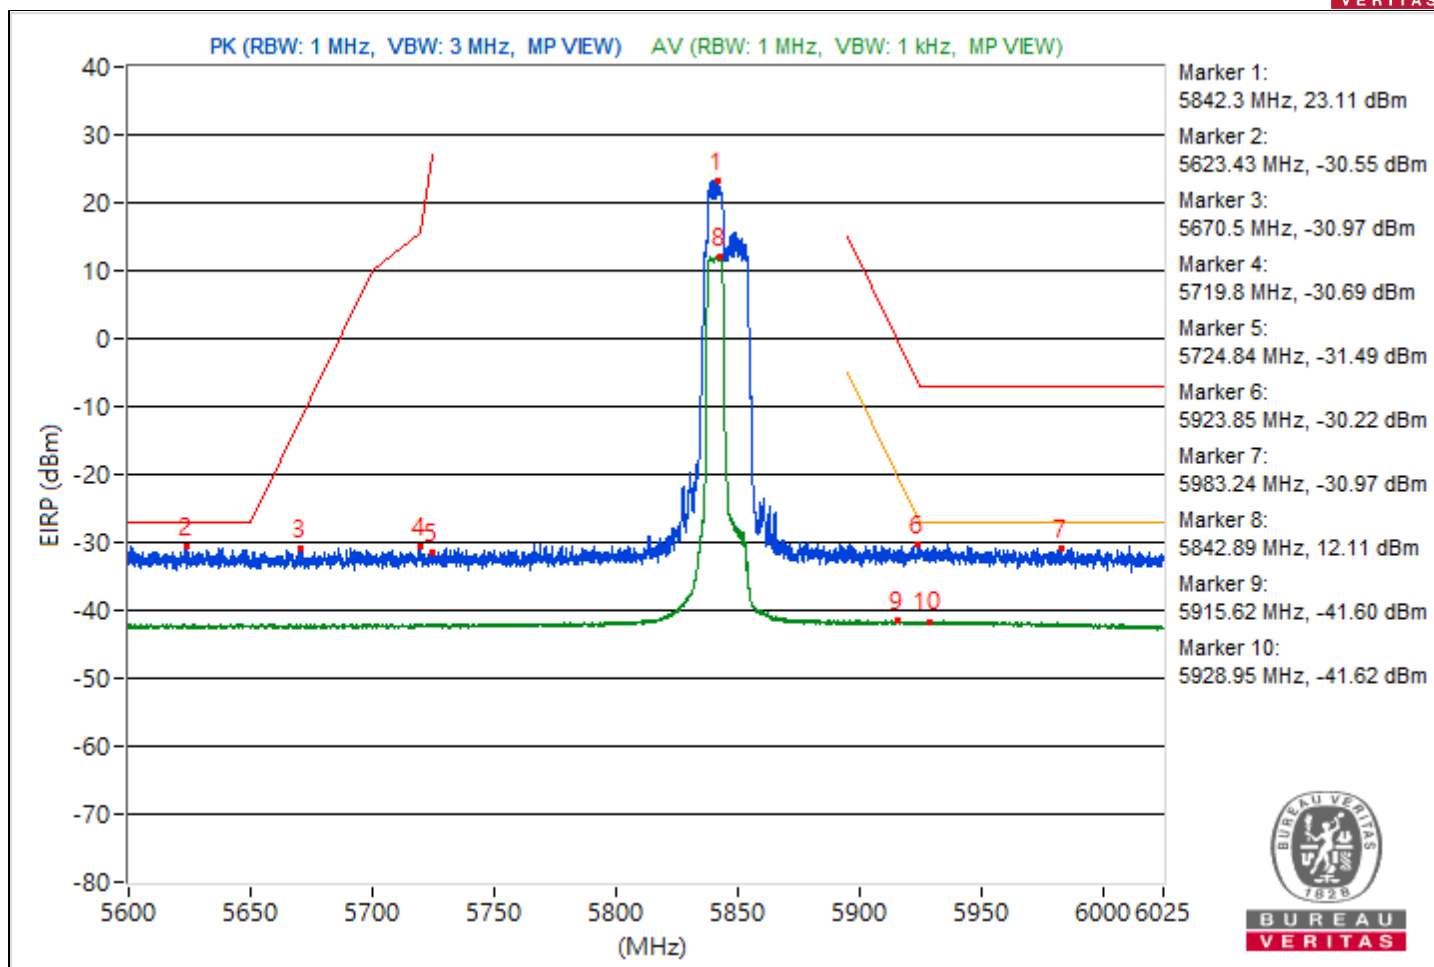


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5859.25	118.1 PK			14.23	15.5	4.92	22.84
2	#5642.29	63.8 PK	68.26	-4.46	-38.2	-41.05	4.92	-31.46
3	#5685.48	64.38 PK	94.52	-30.14	-39.66	-38.11	4.92	-30.88
4	#5716.4	64.08 PK	109.85	-45.77	-37.89	-40.8	4.92	-31.18
5	#5721.82	64.28 PK	115.01	-50.73	-37.88	-40.28	4.92	-30.98
6	#5903.61	65.48 PK	103.95	-38.47	-36.56	-39.28	4.92	-29.78
7	#5979.31	64.87 PK	88.26	-23.39	-39.67	-37.3	4.92	-30.39
8	*5860.79	107.08 AV			4.04	3.73	4.92	11.82
9	#5896.65	53.81 AV	89.05	-35.24	-48.94	-49.88	4.92	-41.45
10	#5931.07	53.61 AV	68.26	-14.65	-49.16	-50.04	4.92	-41.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

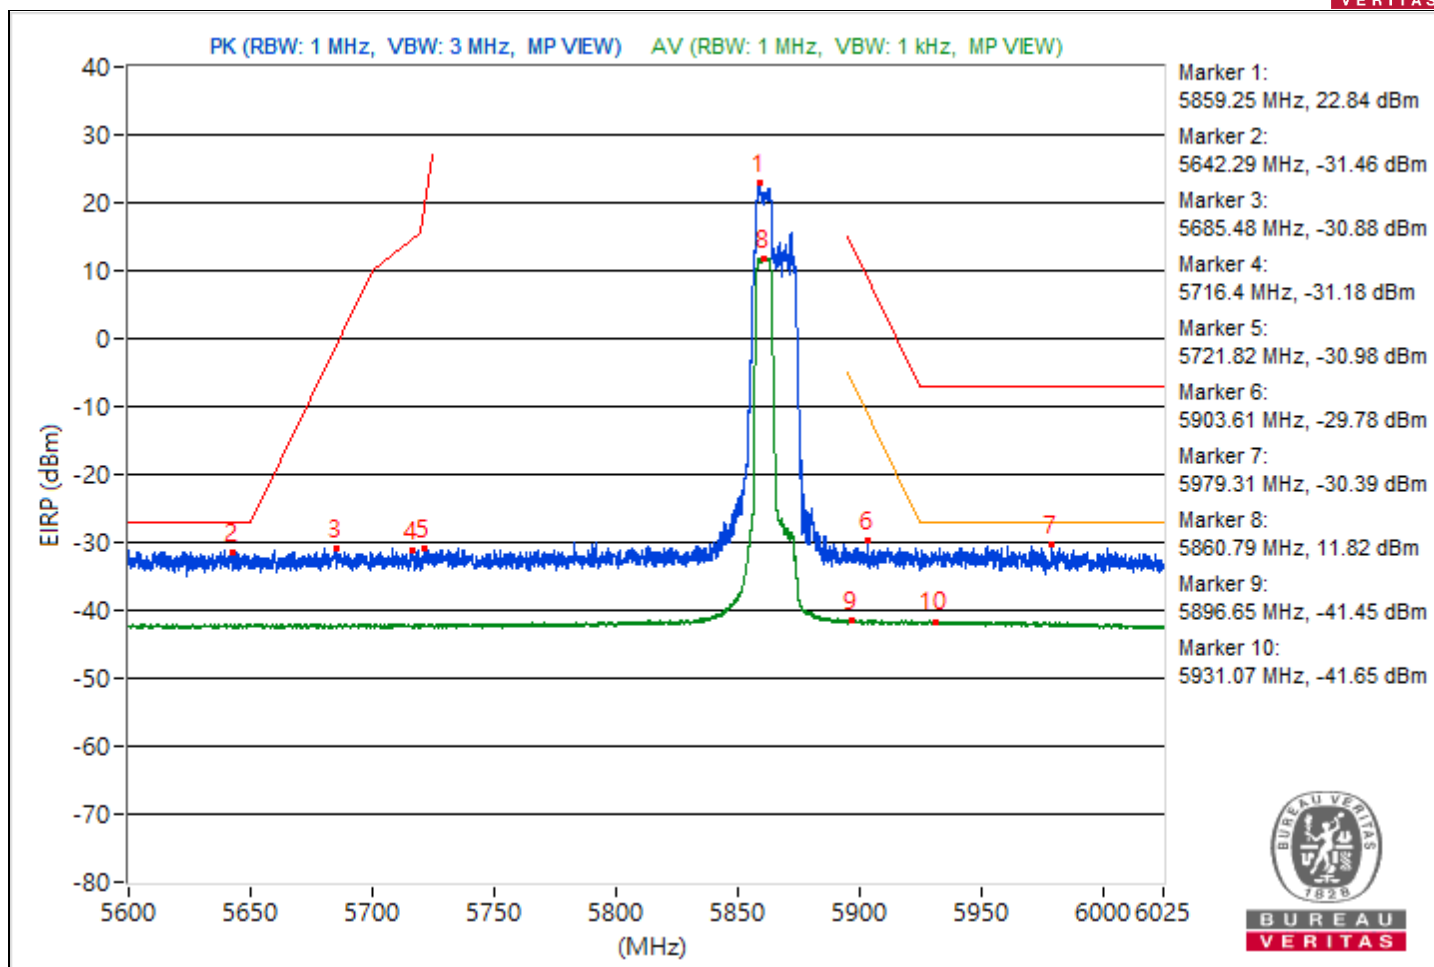


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5887.78	118.25 PK			16.11	13.67	4.92	22.99
2	#5627.73	64.95 PK	68.26	-3.31	-37.2	-39.61	4.92	-30.31
3	#5661.68	64.61 PK	76.9	-12.29	-39.66	-37.72	4.92	-30.65
4	#5705.82	64.12 PK	106.89	-42.77	-37.55	-41.42	4.92	-31.14
5	#5724.58	64.08 PK	121.3	-57.22	-38.51	-39.81	4.92	-31.18
6	#5895	94.79 PK	110.26	-15.47	-10.76	-6.88	4.92	-0.47
7	#5979.9	65.87 PK	88.26	-22.39	-40.12	-35.63	4.92	-29.39
8	*5891.92	107.22 AV			4.15	3.91	4.92	11.96
9	#5895.06	66.24 AV	90.22	-23.98	-36.54	-37.41	4.92	-29.02
10	#5950.41	53.9 AV	68.26	-14.36	-49.22	-49.35	4.92	-41.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

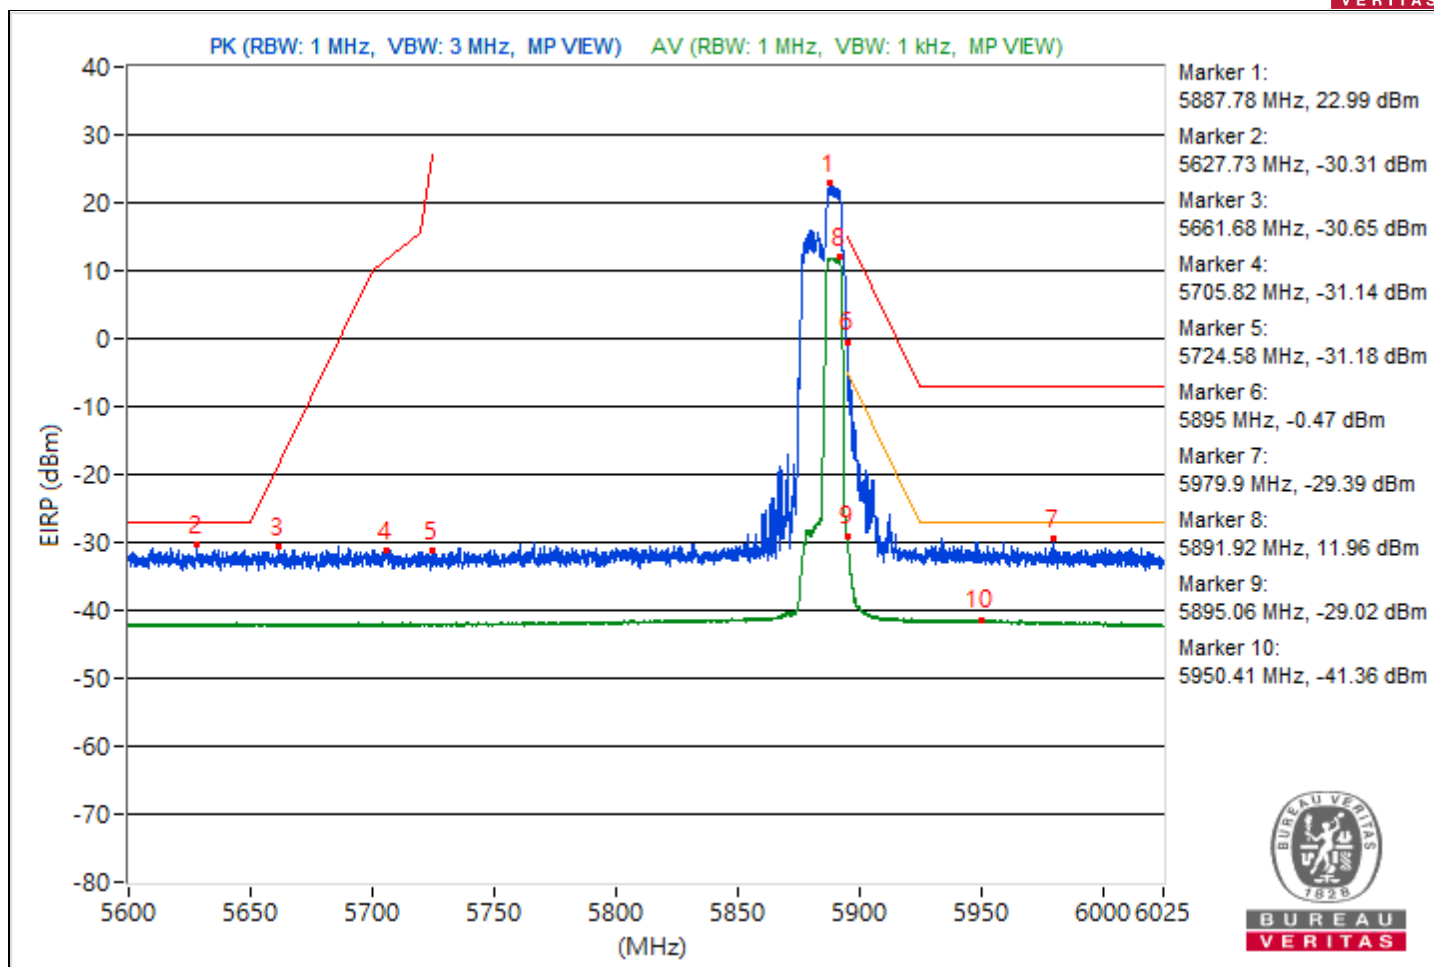


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5842.41	116.8 PK			11.75	14.91	4.92	21.54
2	#5600.37	63.79 PK	68.26	-4.47	-37.6	-42.52	4.92	-31.47
3	#5683.57	64.22 PK	93.1	-28.88	-40.33	-37.94	4.92	-31.04
4	#5707.15	63.57 PK	107.26	-43.69	-37.9	-42.5	4.92	-31.69
5	#5720.38	62.98 PK	111.73	-48.75	-40.62	-39.83	4.92	-32.28
6	#5921.78	64.03 PK	90.62	-26.59	-37.94	-40.85	4.92	-31.23
7	#5945.52	64.17 PK	88.26	-24.09	-38.01	-40.33	4.92	-31.09
8	*5844.43	107.31 AV			3.87	4.36	4.92	12.05
9	#5924.81	53.84 AV	68.4	-14.56	-48.91	-49.85	4.92	-41.42
10	#5938.14	53.61 AV	68.26	-14.65	-49.18	-50.02	4.92	-41.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

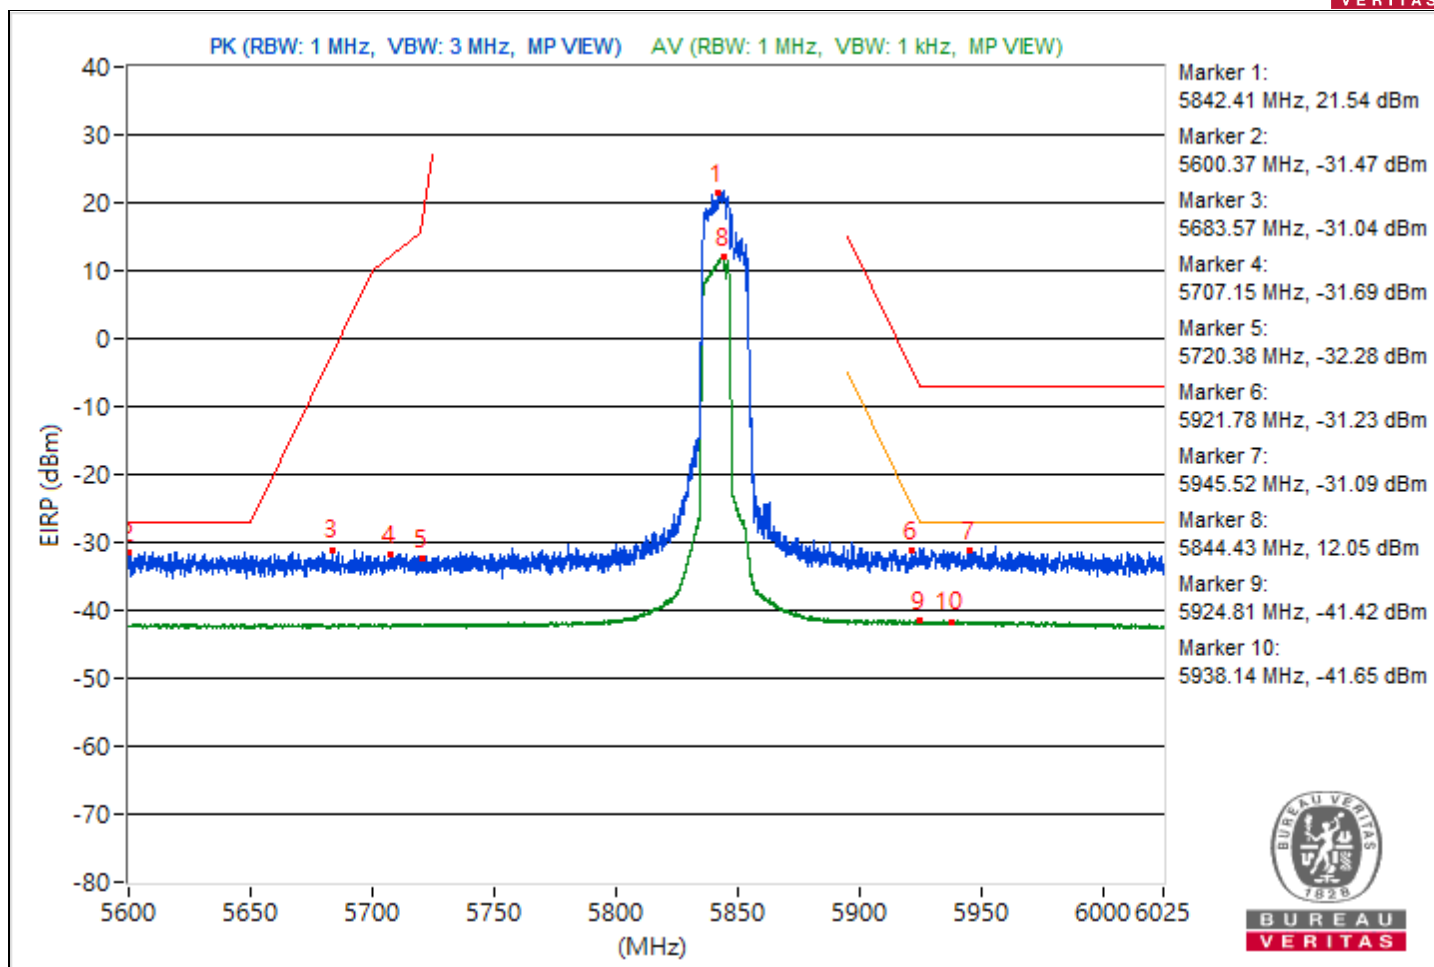


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5864.46	117.5 PK			13.65	14.88	4.92	22.24
2	#5628.79	64.56 PK	68.26	-3.7	-40.55	-37.31	4.92	-30.7
3	#5696.26	64.57 PK	102.49	-37.92	-37.06	-41.08	4.92	-30.69
4	#5706.94	64.43 PK	107.2	-42.77	-39.53	-38.1	4.92	-30.83
5	#5722.56	64.6 PK	116.7	-52.1	-37.44	-40.17	4.92	-30.66
6	#5900.16	66.21 PK	106.48	-40.27	-39.18	-35.52	4.92	-29.05
7	#5958.86	65.11 PK	88.26	-23.15	-36.58	-40.41	4.92	-30.15
8	*5864.35	107.14 AV			3.83	4.07	4.92	11.88
9	#5896.01	54.4 AV	89.52	-35.12	-48.77	-48.82	4.92	-40.86
10	#5939.95	53.68 AV	68.26	-14.58	-49	-50.08	4.92	-41.58

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

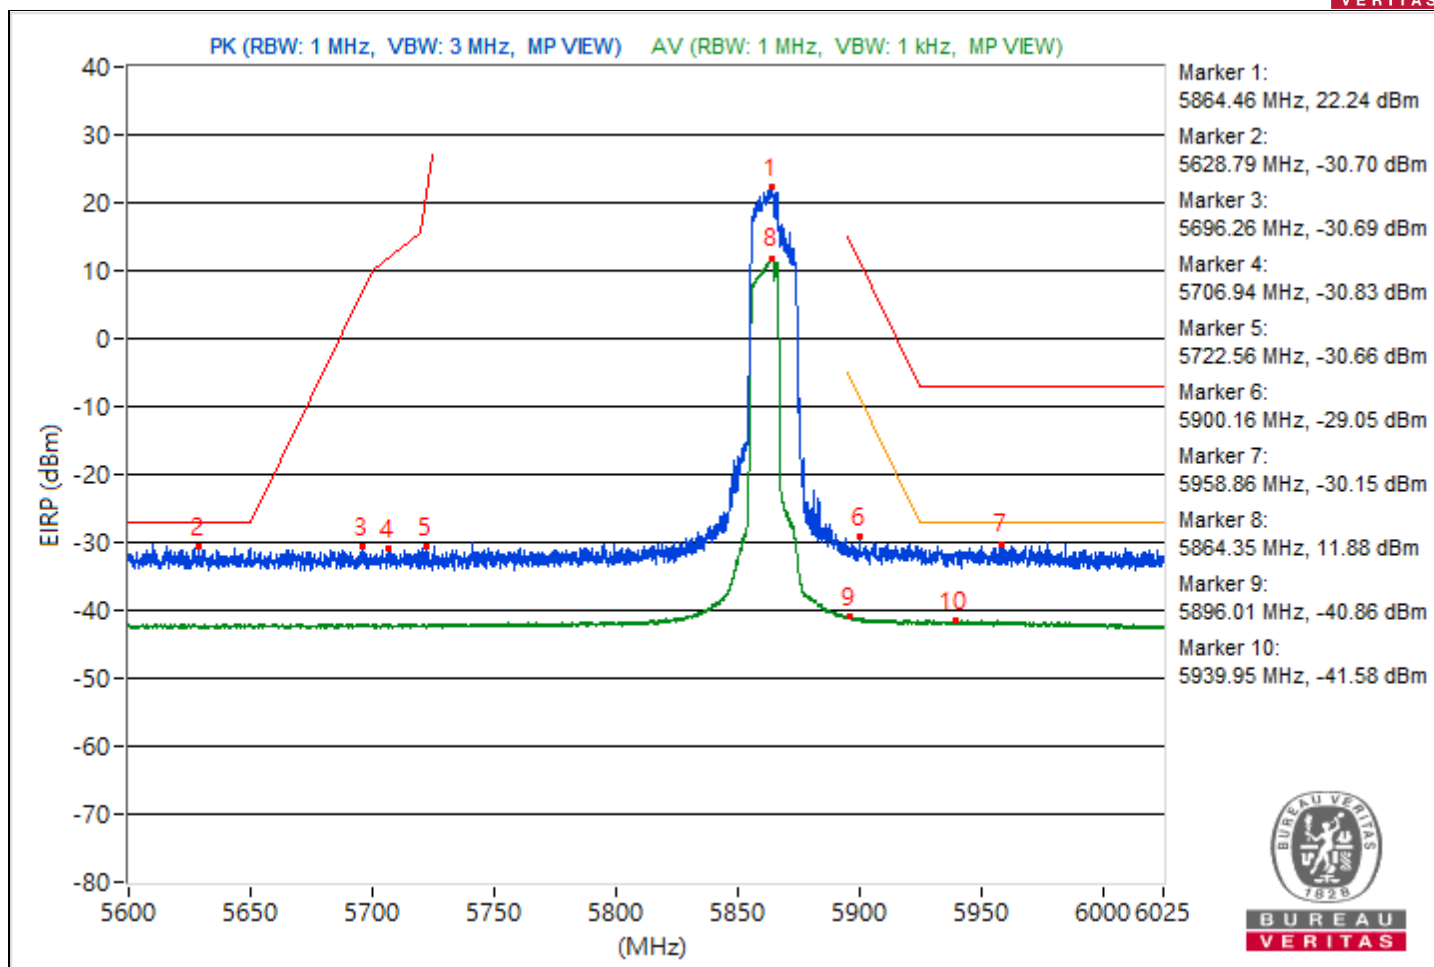


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5886.18	115.12 PK			11.78	12.07	4.92	19.86
2	#5612.48	66.07 PK	68.26	-2.19	-38.75	-35.94	4.92	-29.19
3	#5650.84	64.69 PK	68.88	-4.19	-39.18	-37.92	4.92	-30.57
4	#5701.1	63.7 PK	105.57	-41.87	-40.12	-38.94	4.92	-31.56
5	#5720.38	63.66 PK	111.73	-48.07	-39.07	-40.05	4.92	-31.6
6	#5895	101.61 PK	110.26	-8.65	-2.1	-1.12	4.92	6.35
7	#5934.58	65.57 PK	88.26	-22.69	-36.84	-38.58	4.92	-29.69
8	*5885.92	104.45 AV			0.88	1.6	4.92	9.19
9	#5895	89.74 AV	90.26	-0.52	-13.61	-13.29	4.92	-5.52
10	#5931.71	54.08 AV	68.26	-14.18	-49.07	-49.15	4.92	-41.18

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

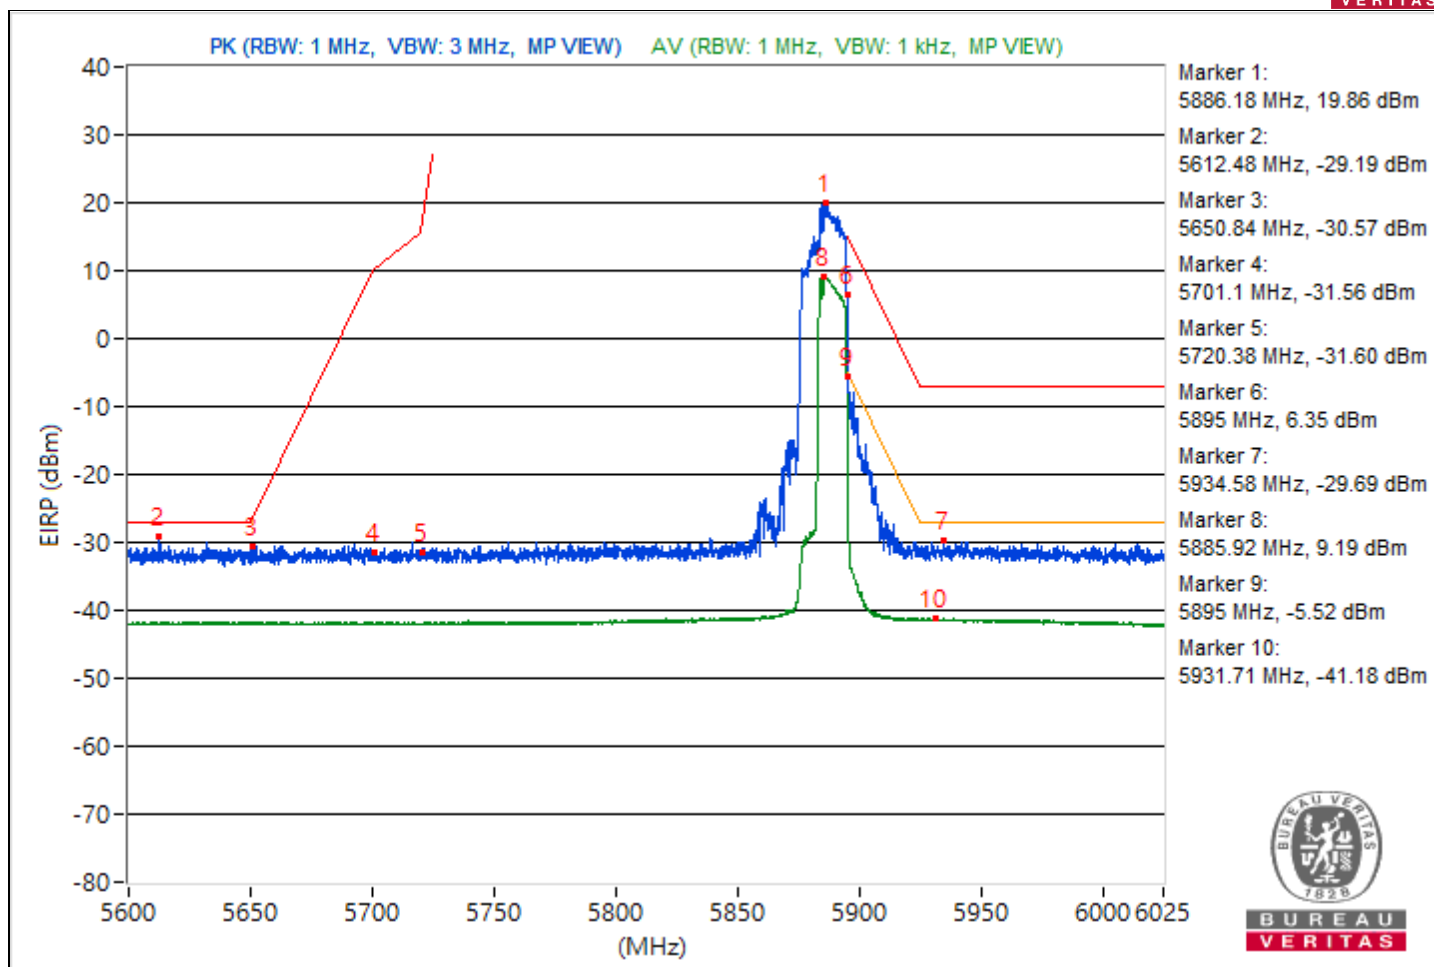


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5861.85	116.7 PK			10.96	15.1	4.92	21.44
2	#5612.7	64.48 PK	68.26	-3.78	-37.36	-40.67	4.92	-30.78
3	#5694.67	65.34 PK	101.32	-35.98	-40.26	-36.31	4.92	-29.92
4	#5717.73	65.86 PK	110.22	-44.36	-36.69	-38.09	4.92	-29.4
5	#5724.26	66 PK	120.57	-54.57	-38.27	-36.33	4.92	-29.26
6	#5895	98.15 PK	110.26	-12.11	-6.03	-4.24	4.92	2.89
7	#5933.15	78.73 PK	88.26	-9.53	-26.52	-23.06	4.92	-16.53
8	*5853.67	105.45 AV			2.23	2.29	4.92	10.19
9	#5895	86.01 AV	90.26	-4.25	-17.53	-16.86	4.92	-9.25
10	#5925.18	67.64 AV	68.26	-0.62	-37.15	-34.39	4.92	-27.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

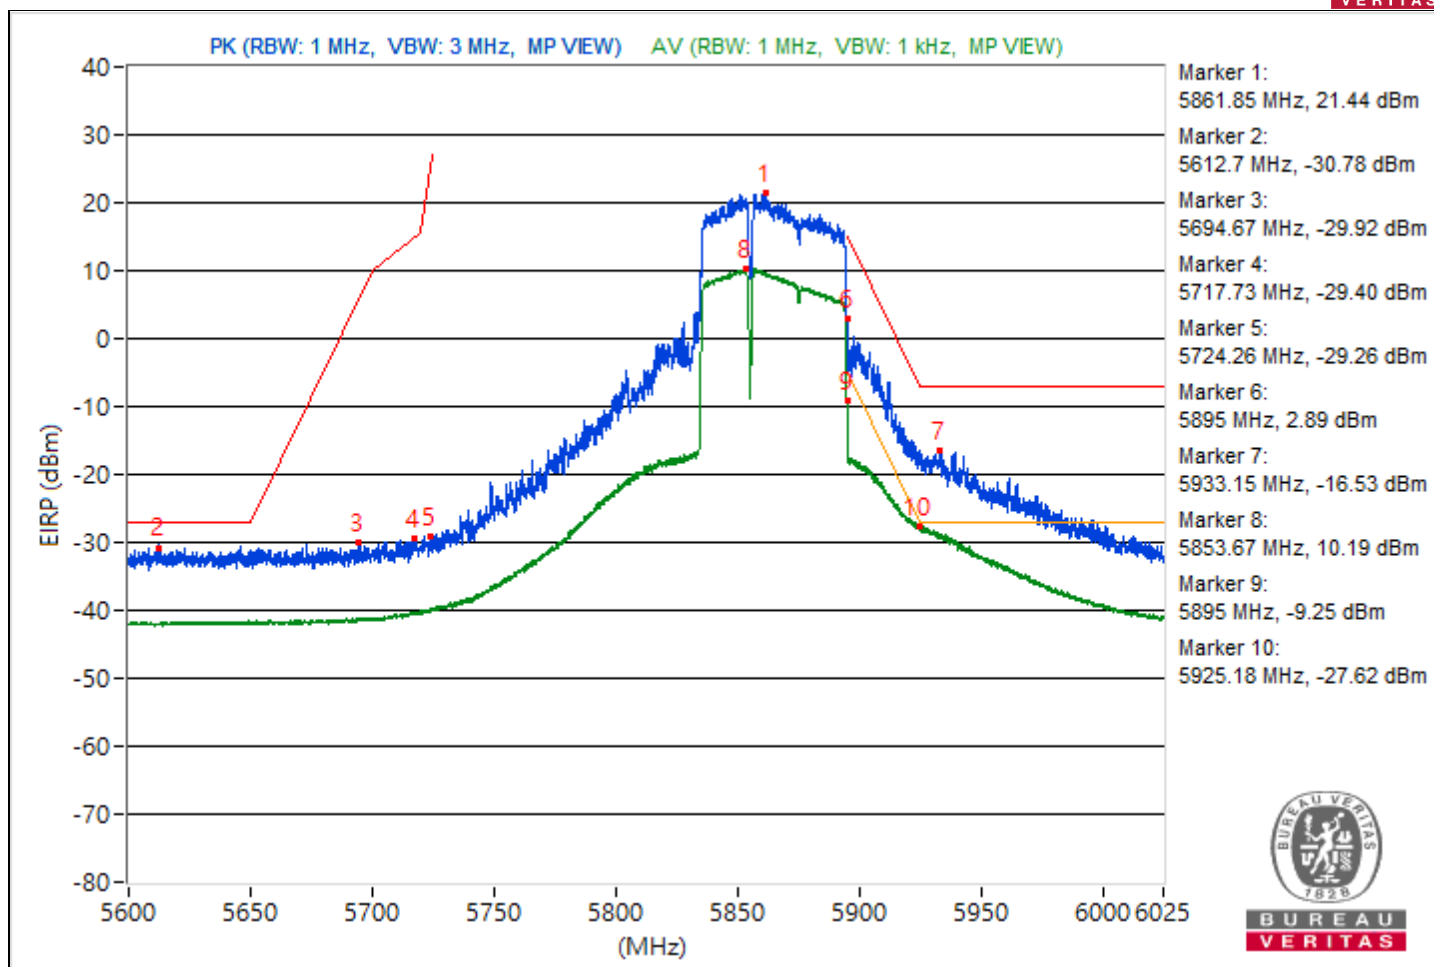


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5812.34	108.34 PK			5.93	4.21	4.92	13.08
2	#5641.23	64.94 PK	68.26	-3.32	-36.76	-40.52	4.92	-30.32
3	#5683.09	64.91 PK	92.75	-27.84	-36.3	-42.01	4.92	-30.35
4	#5719.8	66.48 PK	110.8	-44.32	-39.14	-35.16	4.92	-28.78
5	#5723.99	67.32 PK	119.96	-52.64	-33.96	-39.35	4.92	-27.94
6	#5900.58	80.83 PK	106.17	-25.34	-22.6	-22.14	4.92	-14.43
7	#5933.57	65.68 PK	88.26	-22.58	-36.06	-39.7	4.92	-29.58
8	*5812.93	97.99 AV			-4.95	-5.48	4.92	2.73
9	#5895.69	66.6 AV	89.75	-23.15	-36.9	-36.31	4.92	-28.66
10	#5927.04	55.49 AV	68.26	-12.77	-47.61	-47.79	4.92	-39.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

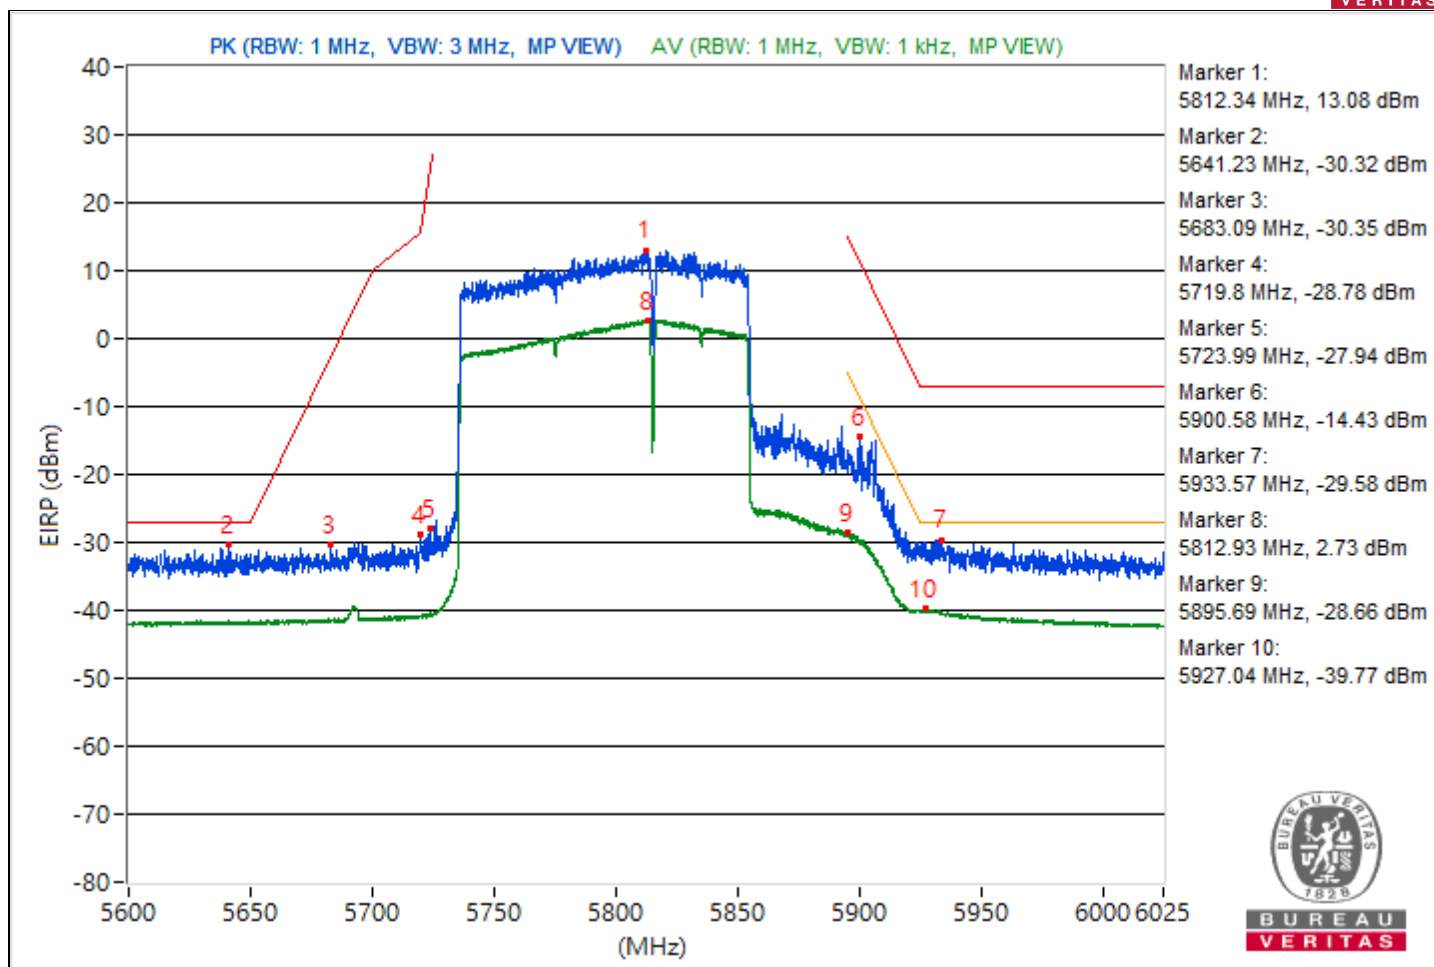


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	5.6 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5799.64	108.6 PK			3.21	6.86	4.92	13.34
2	#5622.26	64.92 PK	68.26	-3.34	-41.07	-36.58	4.92	-30.34
3	#5698.81	64.83 PK	104.38	-39.55	-39.55	-37.43	4.92	-30.43
4	#5708.37	66 PK	107.6	-41.6	-36.25	-38.41	4.92	-29.26
5	#5723.83	65.07 PK	119.59	-54.52	-37.18	-39.33	4.92	-30.19
6	#5897.18	82.63 PK	108.66	-26.03	-23.52	-18.83	4.92	-12.63
7	#5942.6	66.42 PK	88.26	-21.84	-36.21	-37.42	4.92	-28.84
8	*5812.77	97.5 AV			-5.42	-5.99	4.92	2.24
9	#5897.23	68.23 AV	88.62	-20.39	-34.94	-34.98	4.92	-27.03
10	#5927.09	55.98 AV	68.26	-12.28	-47.09	-47.33	4.92	-39.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

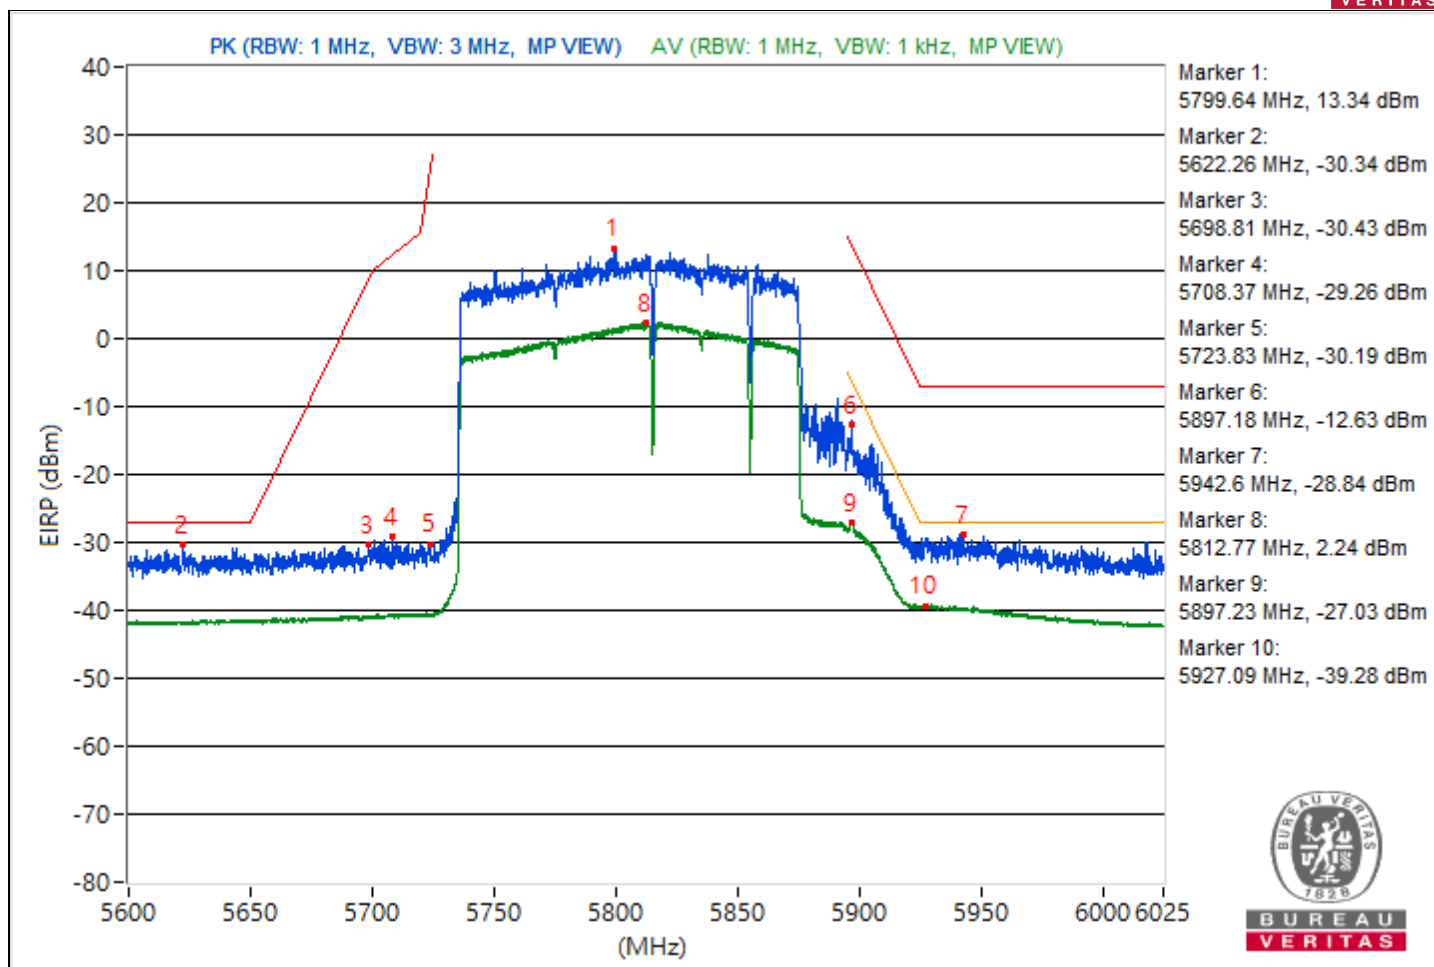


**Mode B
For 1TX**

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.2 PK	74.0	-26.8	3.30 H	45	18.8	28.4
2	11690.00	38.5 AV	54.0	-15.5	3.30 H	45	10.1	28.4
3	#17535.00	55.7 PK	88.2	-32.5	1.49 H	187	21.2	34.5
4	#17535.00	43.2 AV	68.2	-25.0	1.49 H	187	8.7	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

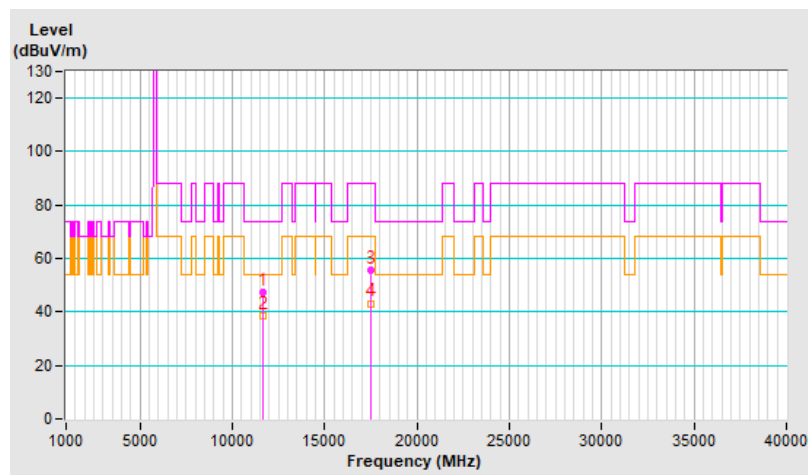


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	1.99 V	199	19.9	28.4
2	11690.00	39.3 AV	54.0	-14.7	1.99 V	199	10.9	28.4
3	#17535.00	54.9 PK	88.2	-33.3	1.53 V	64	20.4	34.5
4	#17535.00	42.7 AV	68.2	-25.5	1.53 V	64	8.2	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

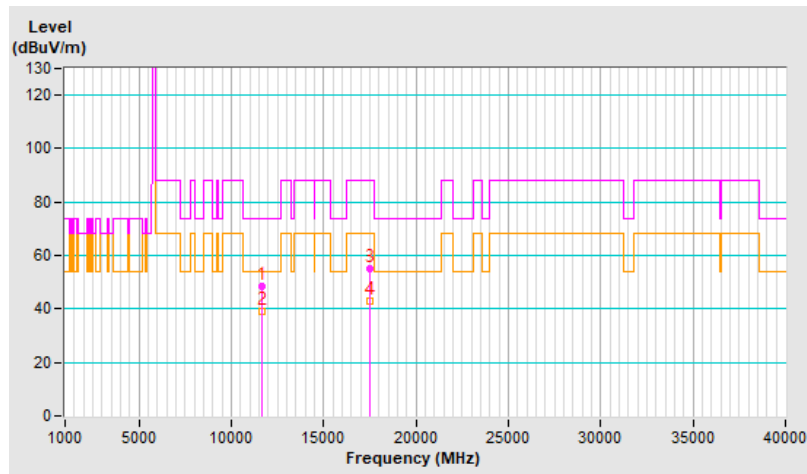


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.5 PK	74.0	-26.5	3.25 H	53	19.3	28.2
2	11730.00	38.8 AV	54.0	-15.2	3.25 H	53	10.6	28.2
3	#17595.00	55.4 PK	88.2	-32.8	1.55 H	198	20.4	35.0
4	#17595.00	42.9 AV	68.2	-25.3	1.55 H	198	7.9	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

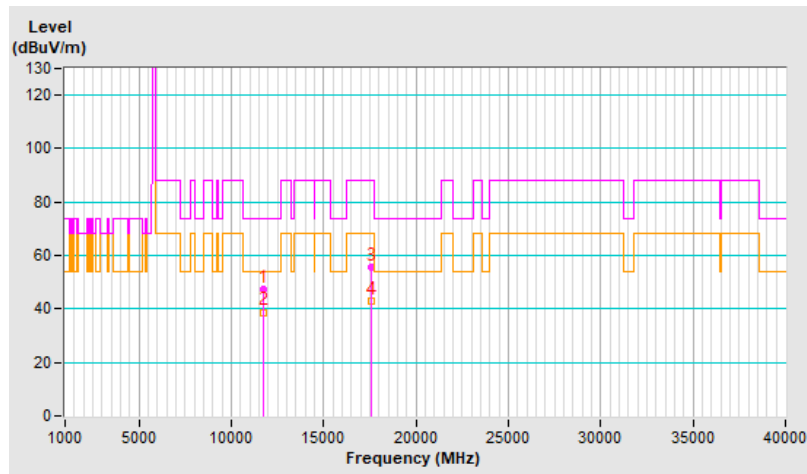


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.7 PK	74.0	-26.3	1.93 V	213	19.5	28.2
2	11730.00	38.9 AV	54.0	-15.1	1.93 V	213	10.7	28.2
3	#17595.00	54.1 PK	88.2	-34.1	1.57 V	65	19.1	35.0
4	#17595.00	42.2 AV	68.2	-26.0	1.57 V	65	7.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

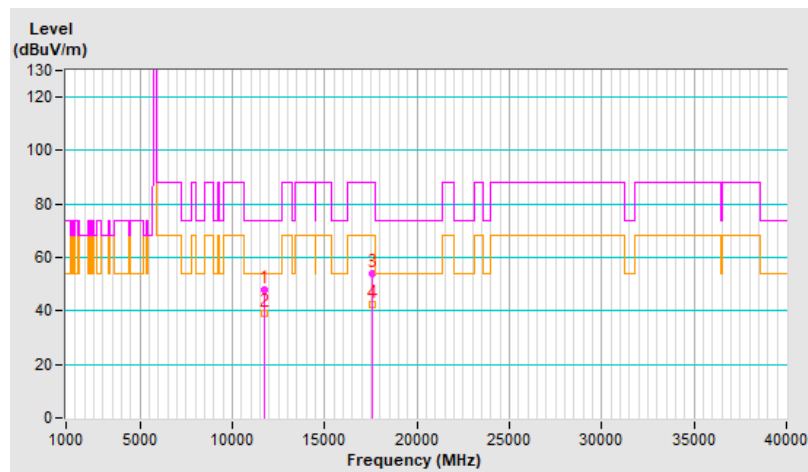


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	47.7 PK	74.0	-26.3	3.29 H	30	19.6	28.1
2	11770.00	38.6 AV	54.0	-15.4	3.29 H	30	10.5	28.1
3	#17655.00	55.1 PK	88.2	-33.1	1.47 H	201	19.5	35.6
4	#17655.00	42.6 AV	68.2	-25.6	1.47 H	201	7.0	35.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

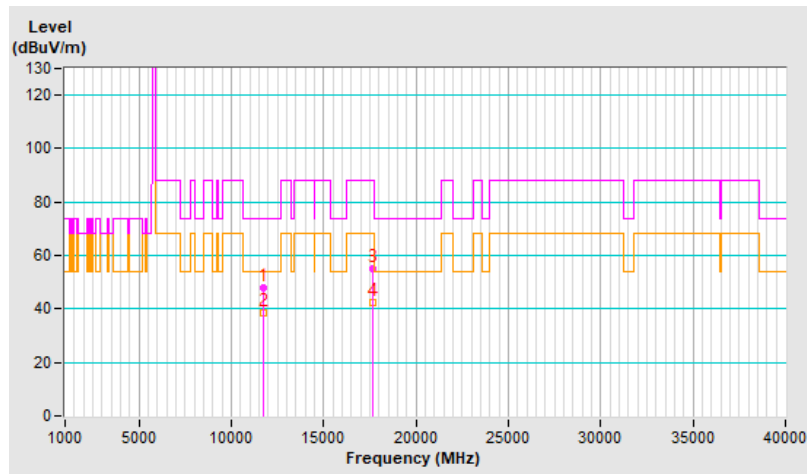


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	47.6 PK	74.0	-26.4	2.04 V	187	19.5	28.1
2	11770.00	38.8 AV	54.0	-15.2	2.04 V	187	10.7	28.1
3	#17655.00	55.3 PK	88.2	-32.9	1.47 V	62	19.7	35.6
4	#17655.00	43.0 AV	68.2	-25.2	1.47 V	62	7.4	35.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

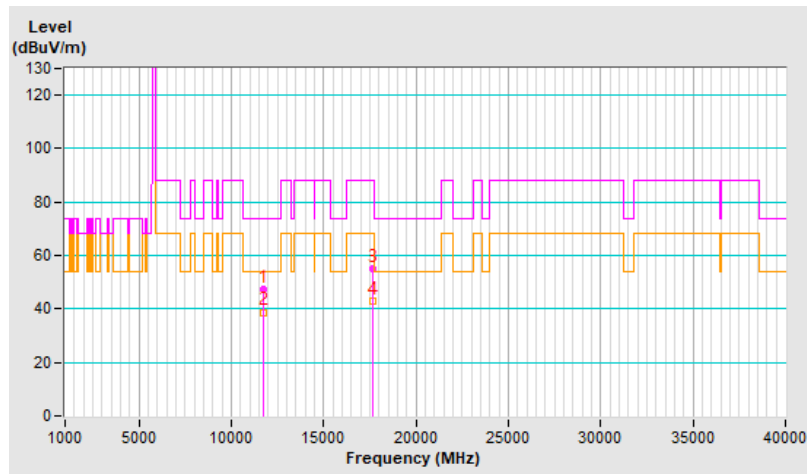


For 1S1T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	50.9 PK	74.0	-23.1	3.19 H	55	22.5	28.4
2	11690.00	41.1 AV	54.0	-12.9	3.19 H	55	12.7	28.4
3	#17535.00	56.0 PK	88.2	-32.2	1.42 H	198	21.5	34.5
4	#17535.00	43.9 AV	68.2	-24.3	1.42 H	198	9.4	34.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

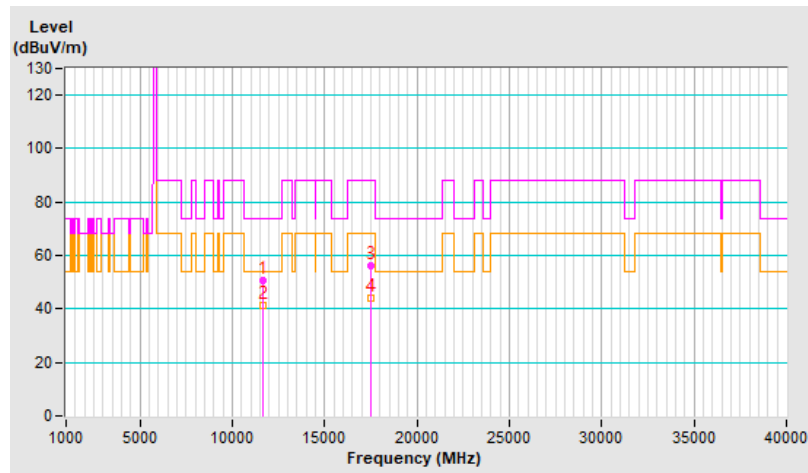


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	50.7 PK	74.0	-23.3	2.02 V	192	22.3	28.4
2	11690.00	41.0 AV	54.0	-13.0	2.02 V	192	12.6	28.4
3	#17535.00	56.0 PK	88.2	-32.2	1.44 V	89	21.5	34.5
4	#17535.00	43.8 AV	68.2	-24.4	1.44 V	89	9.3	34.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

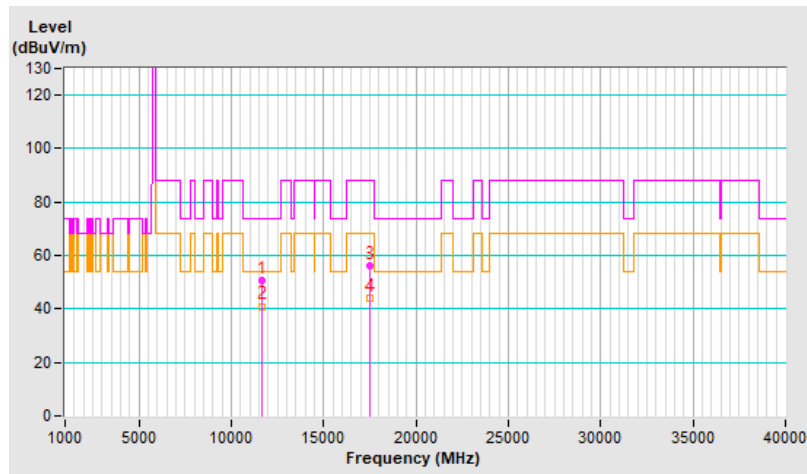


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	50.9 PK	74.0	-23.1	3.23 H	77	22.7	28.2
2	11730.00	41.0 AV	54.0	-13.0	3.23 H	77	12.8	28.2
3	#17595.00	56.7 PK	88.2	-31.5	1.41 H	184	21.7	35.0
4	#17595.00	44.4 AV	68.2	-23.8	1.41 H	184	9.4	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

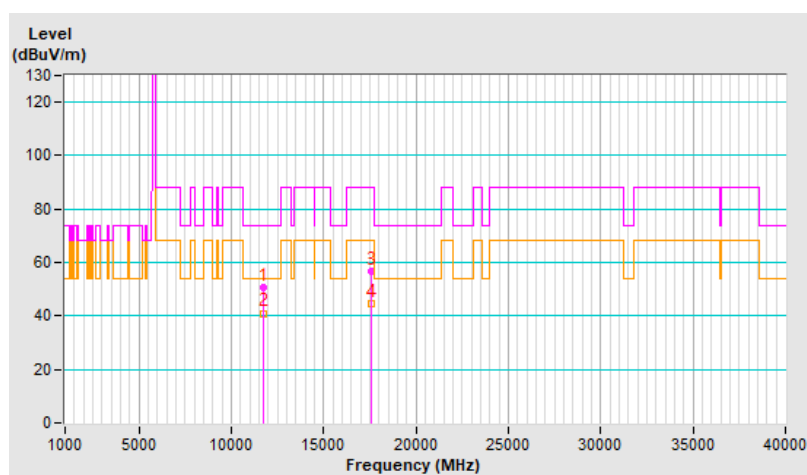


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.8 PK	74.0	-25.2	1.99 V	180	20.6	28.2
2	11730.00	39.0 AV	54.0	-15.0	1.99 V	180	10.8	28.2
3	#17595.00	55.4 PK	88.2	-32.8	1.61 V	59	20.4	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.61 V	59	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

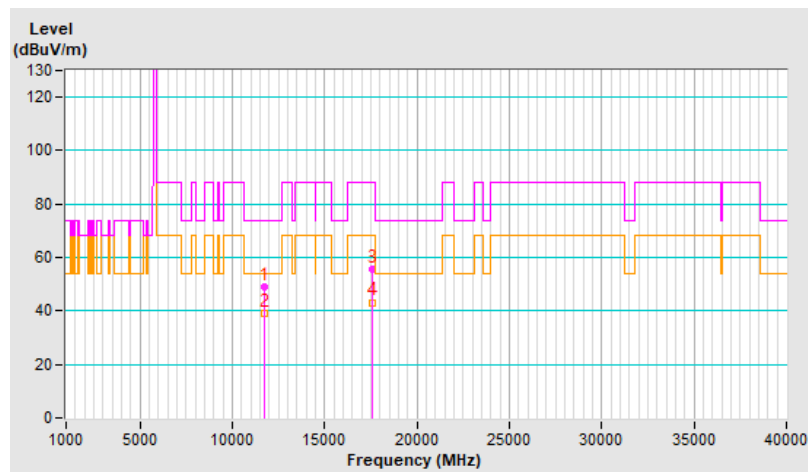


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	50.8 PK	74.0	-23.2	3.20 H	82	22.7	28.1
2	11770.00	41.2 AV	54.0	-12.8	3.20 H	82	13.1	28.1
3	#17655.00	55.6 PK	88.2	-32.6	1.33 H	158	20.0	35.6
4	#17655.00	43.5 AV	68.2	-24.7	1.33 H	158	7.9	35.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

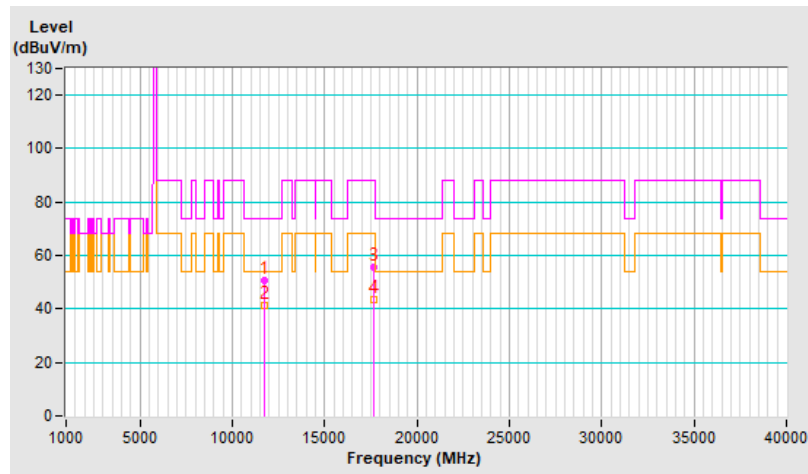


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	2.05 V	188	20.8	28.1
2	11770.00	39.1 AV	54.0	-14.9	2.05 V	188	11.0	28.1
3	#17655.00	55.7 PK	88.2	-32.5	1.63 V	56	20.1	35.6
4	#17655.00	43.6 AV	68.2	-24.6	1.63 V	56	8.0	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

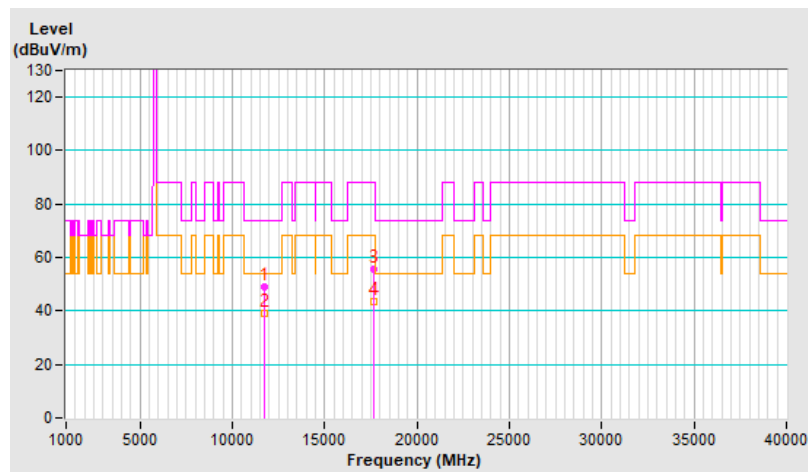


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11670.00	50.6 PK	74.0	-23.4	3.25 H	48	22.1	28.5
2	11670.00	40.9 AV	54.0	-13.1	3.25 H	48	12.4	28.5
3	#17505.00	54.8 PK	88.2	-33.4	1.47 H	208	20.6	34.2
4	#17505.00	43.1 AV	68.2	-25.1	1.47 H	208	8.9	34.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

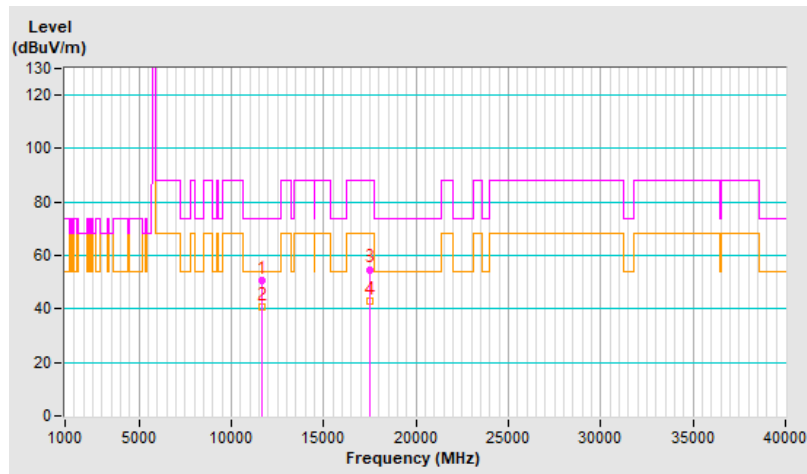


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	48.7 PK	74.0	-25.3	2.08 V	193	20.2	28.5
2	11670.00	39.0 AV	54.0	-15.0	2.08 V	193	10.5	28.5
3	#17505.00	55.3 PK	88.2	-32.9	1.61 V	55	21.1	34.2
4	#17505.00	43.3 AV	68.2	-24.9	1.61 V	55	9.1	34.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

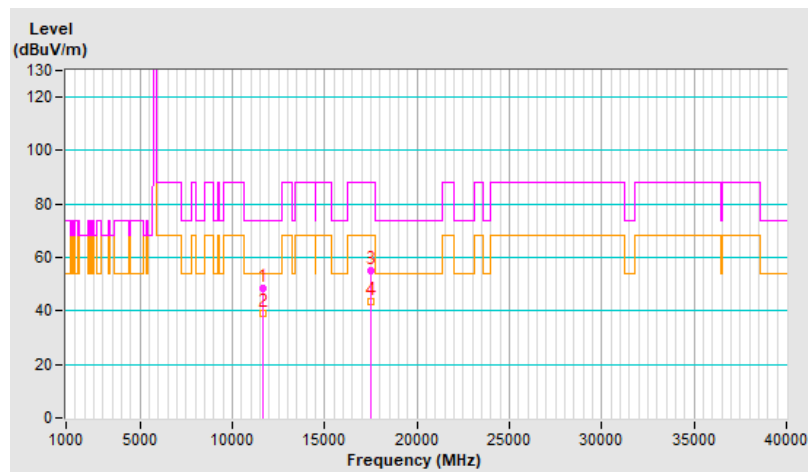


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11750.00	50.7 PK	74.0	-23.3	3.23 H	40	22.5	28.2
2	11750.00	40.9 AV	54.0	-13.1	3.23 H	40	12.7	28.2
3	#17625.00	55.2 PK	88.2	-33.0	1.52 H	215	19.9	35.3
4	#17625.00	43.4 AV	68.2	-24.8	1.52 H	215	8.1	35.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

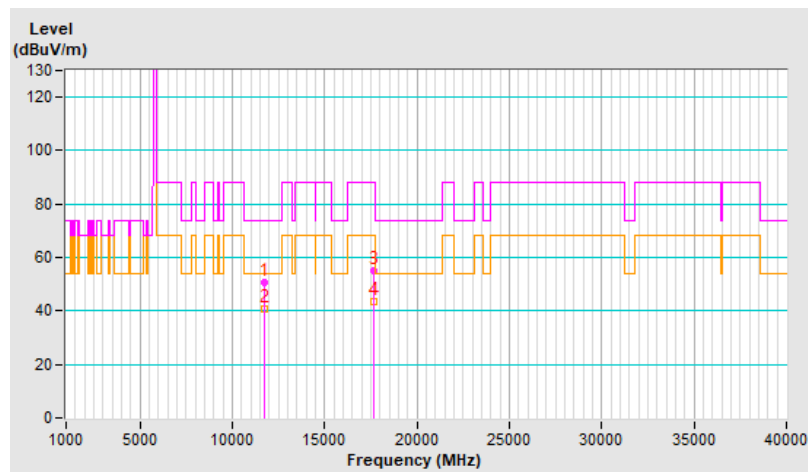


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11750.00	51.1 PK	74.0	-22.9	2.08 V	186	22.9	28.2
2	11750.00	41.5 AV	54.0	-12.5	2.08 V	186	13.3	28.2
3	#17625.00	56.3 PK	88.2	-31.9	1.66 V	45	21.0	35.3
4	#17625.00	44.1 AV	68.2	-24.1	1.66 V	45	8.8	35.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

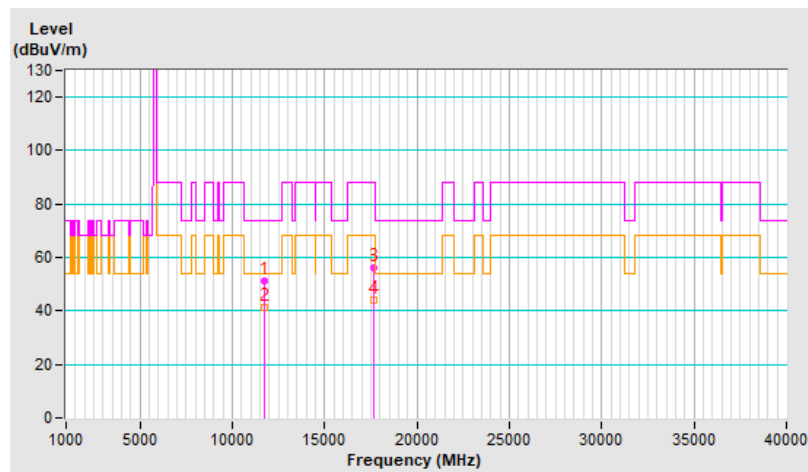


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	50.3 PK	74.0	-23.7	3.24 H	53	22.0	28.3
2	11710.00	40.7 AV	54.0	-13.3	3.24 H	53	12.4	28.3
3	#17565.00	55.6 PK	88.2	-32.6	1.53 H	207	20.9	34.7
4	#17565.00	43.6 AV	68.2	-24.6	1.53 H	207	8.9	34.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

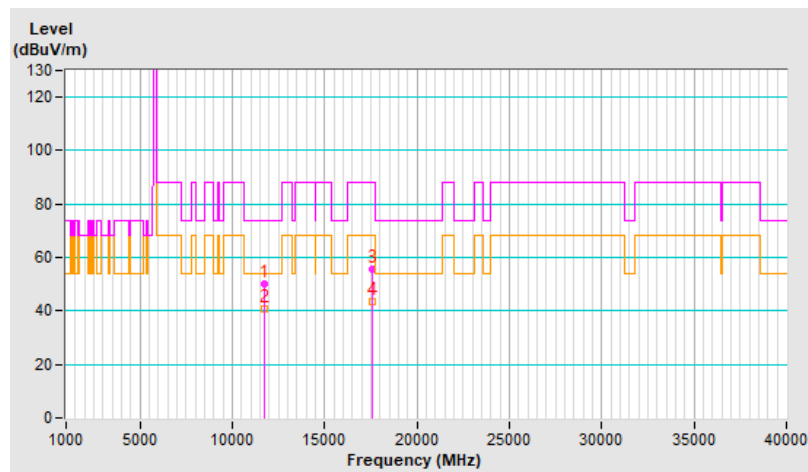


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	51.4 PK	74.0	-22.6	2.00 V	188	23.1	28.3
2	11710.00	41.5 AV	54.0	-12.5	2.00 V	188	13.2	28.3
3	#17565.00	55.9 PK	88.2	-32.3	1.60 V	42	21.2	34.7
4	#17565.00	43.8 AV	68.2	-24.4	1.60 V	42	9.1	34.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

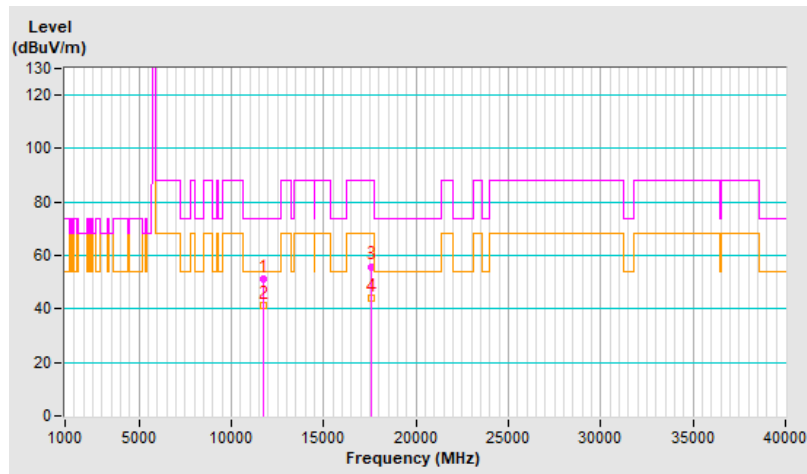


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	50.8 PK	74.0	-23.2	3.21 H	44	22.2	28.6
2	11630.00	40.7 AV	54.0	-13.3	3.21 H	44	12.1	28.6
3	#17445.00	56.1 PK	88.2	-32.1	1.57 H	212	22.3	33.8
4	#17445.00	43.8 AV	68.2	-24.4	1.57 H	212	10.0	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

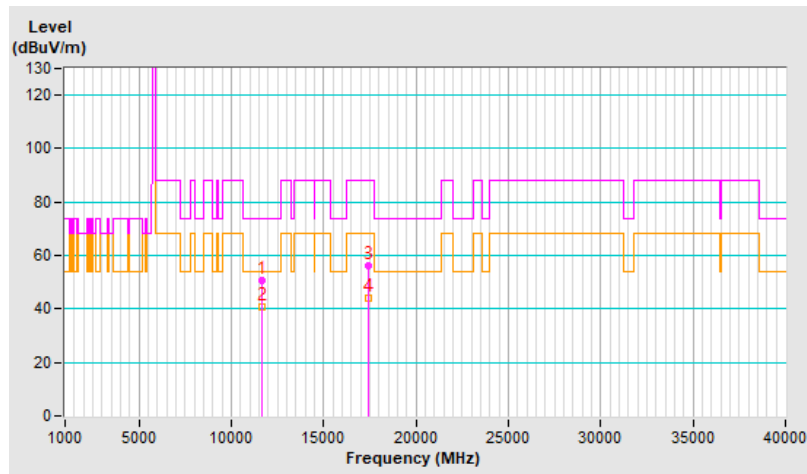


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11630.00	51.1 PK	74.0	-22.9	2.09 V	198	22.5	28.6
2	11630.00	41.4 AV	54.0	-12.6	2.09 V	198	12.8	28.6
3	#17445.00	56.2 PK	88.2	-32.0	1.66 V	56	22.4	33.8
4	#17445.00	44.3 AV	68.2	-23.9	1.66 V	56	10.5	33.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

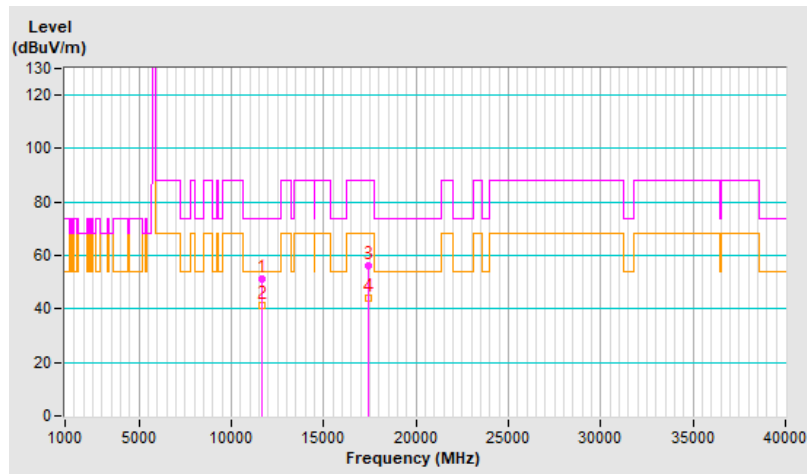


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.26 H	43	20.1	28.4
2	11690.00	39.1 AV	54.0	-14.9	3.26 H	43	10.7	28.4
3	#17535.00	55.5 PK	88.2	-32.7	1.52 H	180	21.0	34.5
4	#17535.00	43.4 AV	68.2	-24.8	1.52 H	180	8.9	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

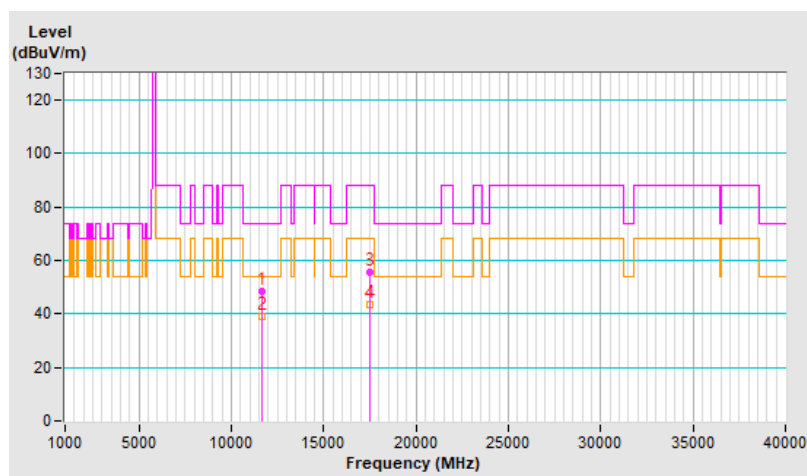


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.9 PK	74.0	-26.1	2.01 V	221	19.5	28.4
2	11690.00	38.5 AV	54.0	-15.5	2.01 V	221	10.1	28.4
3	#17535.00	55.4 PK	88.2	-32.8	1.63 V	57	20.9	34.5
4	#17535.00	43.6 AV	68.2	-24.6	1.63 V	57	9.1	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

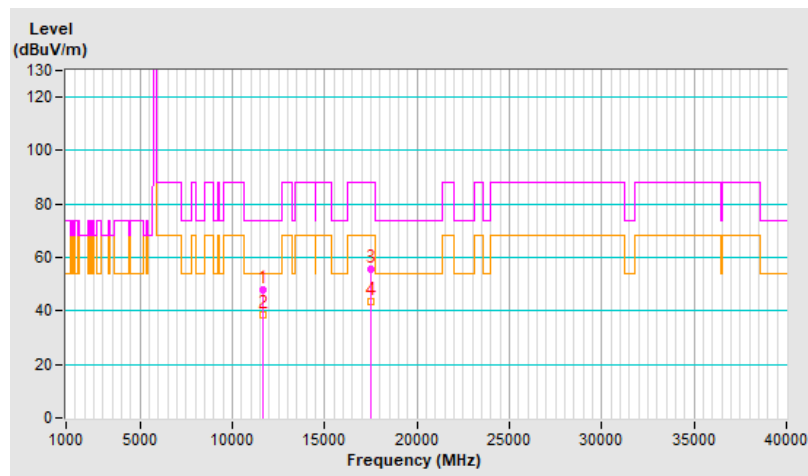


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	3.25 H	59	20.0	28.2
2	11730.00	38.9 AV	54.0	-15.1	3.25 H	59	10.7	28.2
3	#17595.00	55.4 PK	88.2	-32.8	1.48 H	197	20.4	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.48 H	197	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

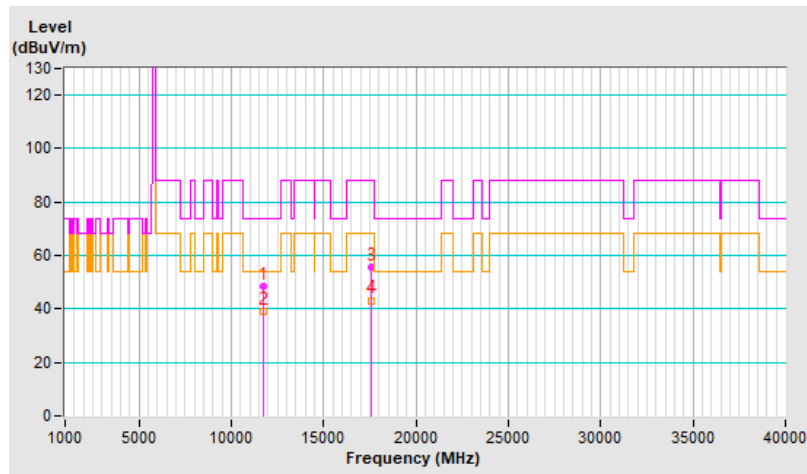


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	1.97 V	221	20.7	28.2
2	11730.00	39.2 AV	54.0	-14.8	1.97 V	221	11.0	28.2
3	#17595.00	55.4 PK	88.2	-32.8	1.60 V	62	20.4	35.0
4	#17595.00	43.7 AV	68.2	-24.5	1.60 V	62	8.7	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

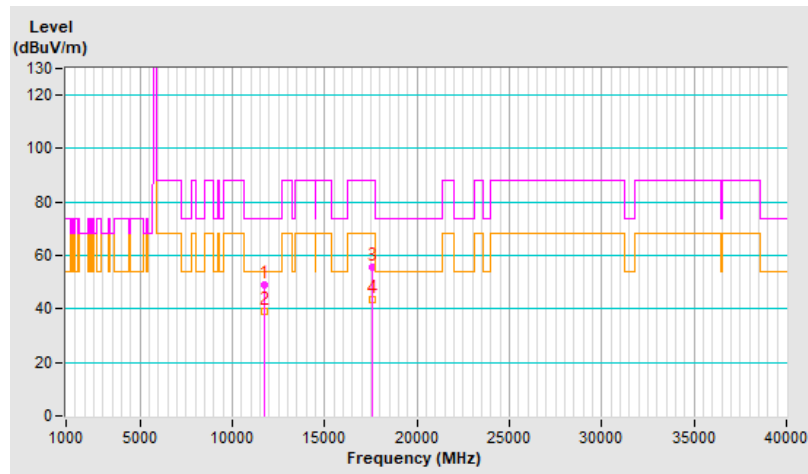


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	3.27 H	61	20.1	28.1
2	11770.00	39.0 AV	54.0	-15.0	3.27 H	61	10.9	28.1
3	#17655.00	55.8 PK	88.2	-32.4	1.48 H	175	20.2	35.6
4	#17655.00	43.5 AV	68.2	-24.7	1.48 H	175	7.9	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

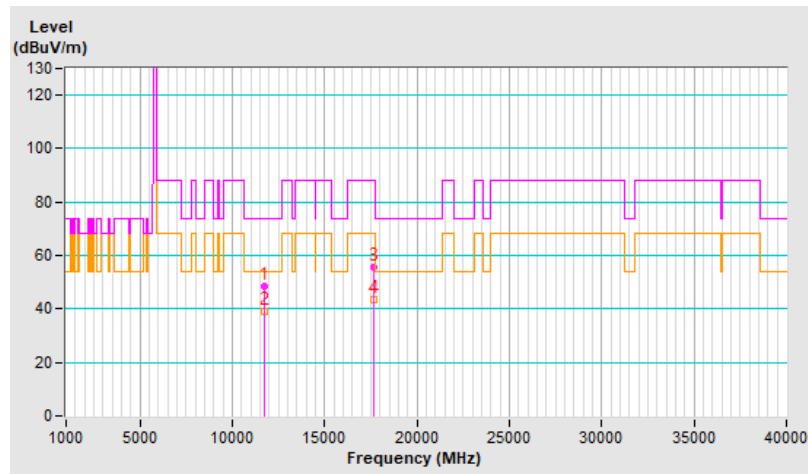


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	1.95 V	205	20.8	28.1
2	11770.00	39.3 AV	54.0	-14.7	1.95 V	205	11.2	28.1
3	#17655.00	54.9 PK	88.2	-33.3	1.65 V	57	19.3	35.6
4	#17655.00	43.0 AV	68.2	-25.2	1.65 V	57	7.4	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

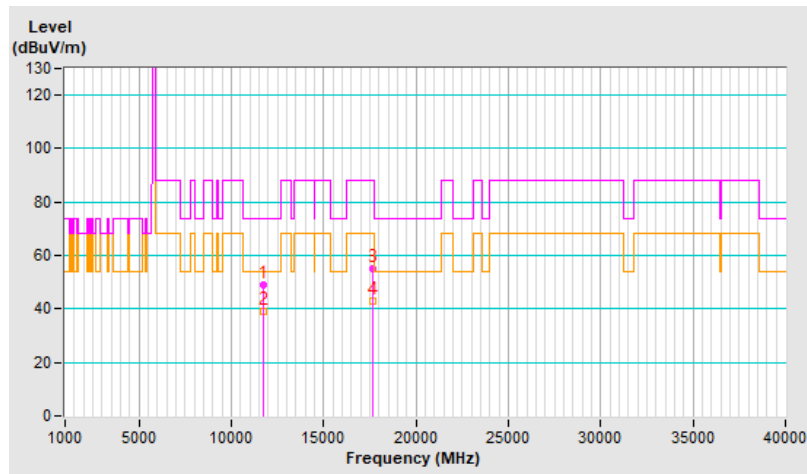


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.2 PK	74.0	-25.8	3.24 H	49	19.8	28.4
2	11690.00	38.9 AV	54.0	-15.1	3.24 H	49	10.5	28.4
3	#17535.00	55.3 PK	88.2	-32.9	1.47 H	189	20.8	34.5
4	#17535.00	43.5 AV	68.2	-24.7	1.47 H	189	9.0	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

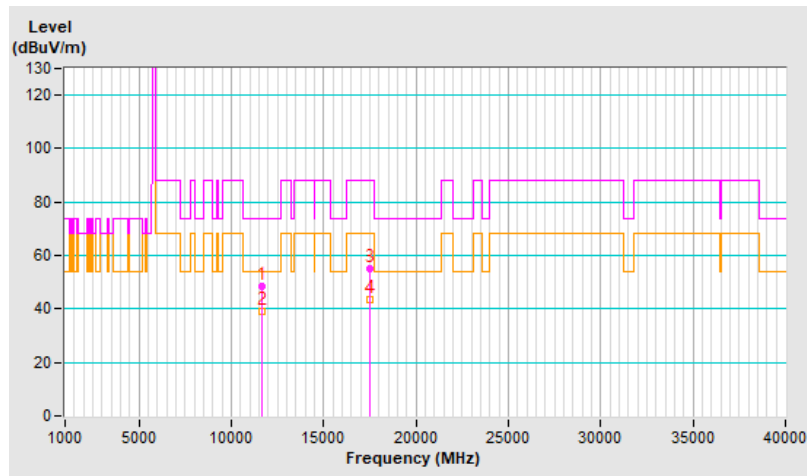


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	1.96 V	211	20.0	28.4
2	11690.00	38.7 AV	54.0	-15.3	1.96 V	211	10.3	28.4
3	#17535.00	55.4 PK	88.2	-32.8	1.64 V	68	20.9	34.5
4	#17535.00	43.6 AV	68.2	-24.6	1.64 V	68	9.1	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

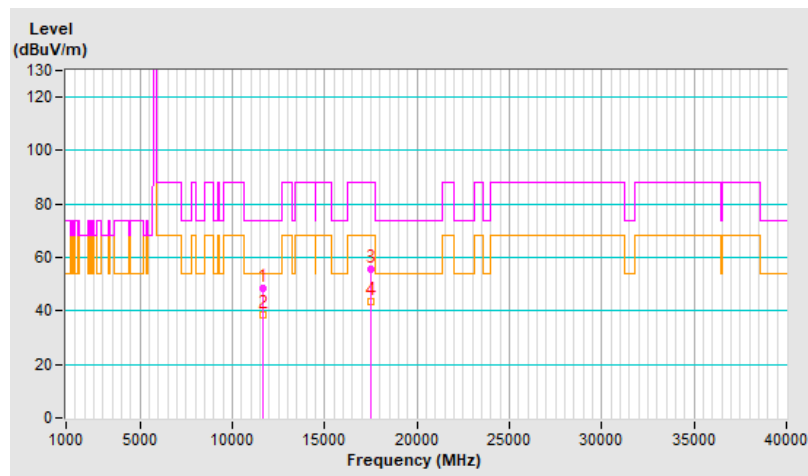


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.6 PK	74.0	-26.4	3.24 H	35	19.4	28.2
2	11730.00	38.4 AV	54.0	-15.6	3.24 H	35	10.2	28.2
3	#17595.00	55.5 PK	88.2	-32.7	1.50 H	177	20.5	35.0
4	#17595.00	43.5 AV	68.2	-24.7	1.50 H	177	8.5	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

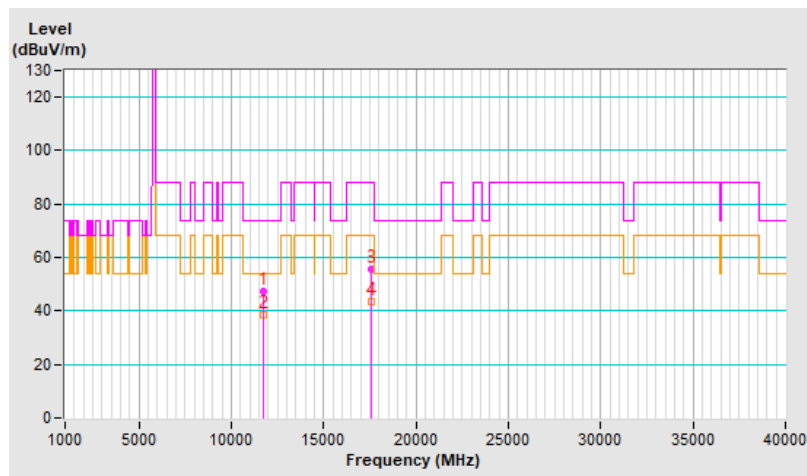


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.3 PK	74.0	-25.7	2.02 V	232	20.1	28.2
2	11730.00	38.6 AV	54.0	-15.4	2.02 V	232	10.4	28.2
3	#17595.00	55.2 PK	88.2	-33.0	1.59 V	54	20.2	35.0
4	#17595.00	43.1 AV	68.2	-25.1	1.59 V	54	8.1	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

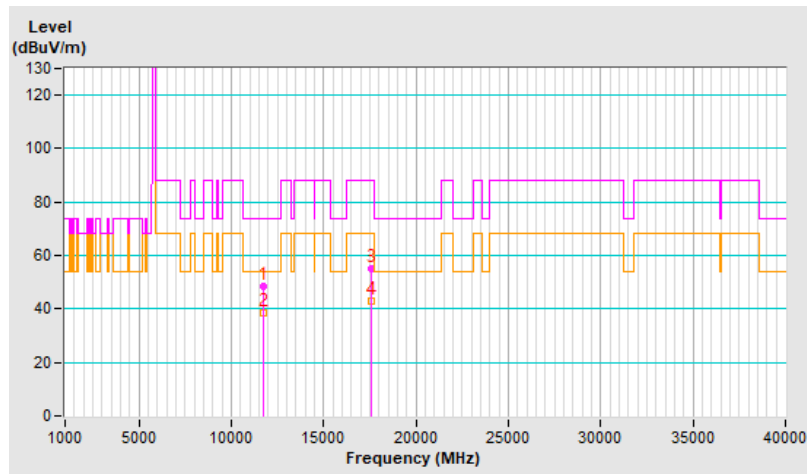


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	3.30 H	33	20.5	28.1
2	11770.00	38.9 AV	54.0	-15.1	3.30 H	33	10.8	28.1
3	#17655.00	55.9 PK	88.2	-32.3	1.44 H	196	20.3	35.6
4	#17655.00	43.5 AV	68.2	-24.7	1.44 H	196	7.9	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

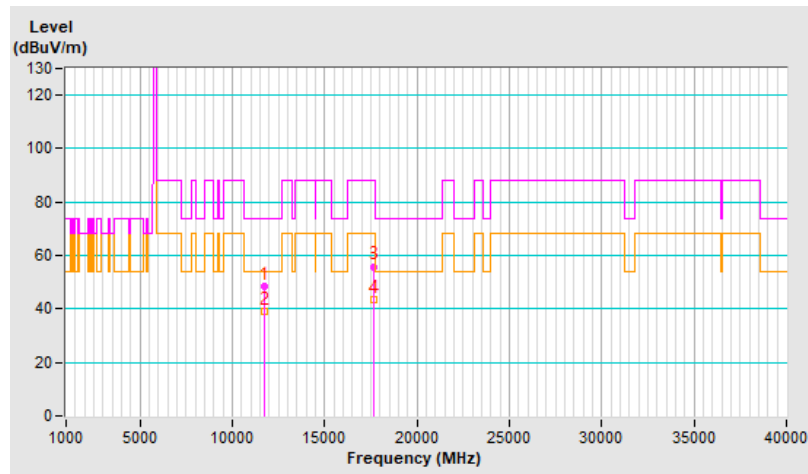


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	1.95 V	221	20.1	28.1
2	11770.00	38.4 AV	54.0	-15.6	1.95 V	221	10.3	28.1
3	#17655.00	55.4 PK	88.2	-32.8	1.65 V	60	19.8	35.6
4	#17655.00	43.6 AV	68.2	-24.6	1.65 V	60	8.0	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

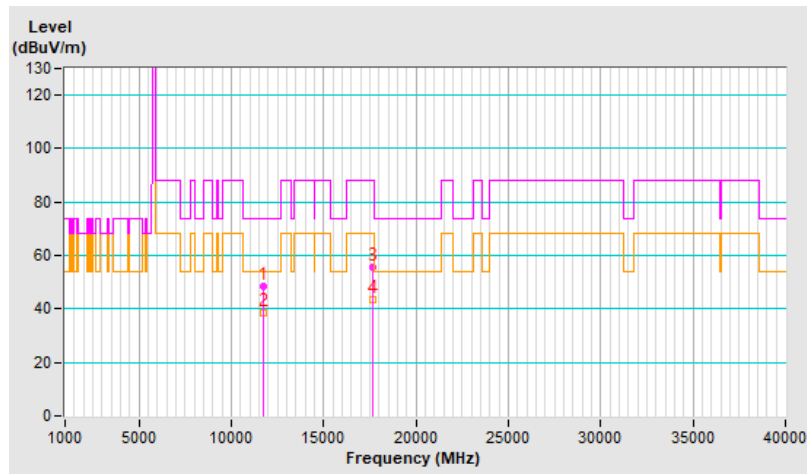


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.1 PK	74.0	-25.9	3.27 H	34	19.7	28.4
2	11690.00	39.0 AV	54.0	-15.0	3.27 H	34	10.6	28.4
3	#17535.00	55.5 PK	88.2	-32.7	1.52 H	170	21.0	34.5
4	#17535.00	43.4 AV	68.2	-24.8	1.52 H	170	8.9	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

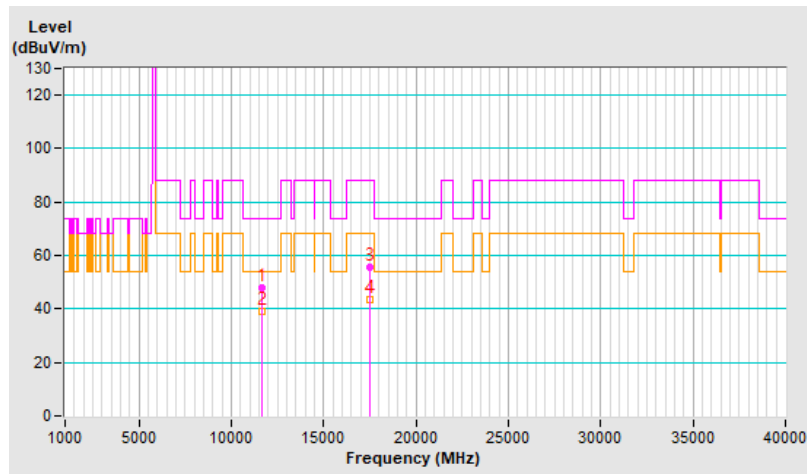


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	2.01 V	223	19.9	28.4
2	11690.00	39.0 AV	54.0	-15.0	2.01 V	223	10.6	28.4
3	#17535.00	55.5 PK	88.2	-32.7	1.60 V	63	21.0	34.5
4	#17535.00	43.3 AV	68.2	-24.9	1.60 V	63	8.8	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

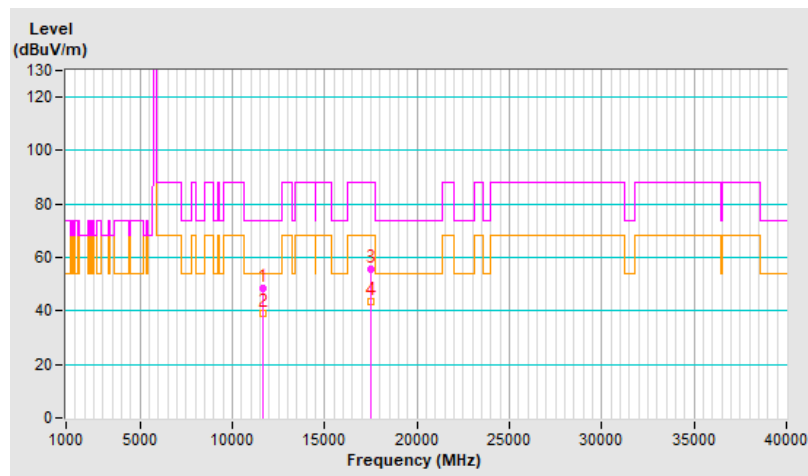


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.9 PK	74.0	-26.1	3.29 H	55	19.7	28.2
2	11730.00	38.3 AV	54.0	-15.7	3.29 H	55	10.1	28.2
3	#17595.00	55.0 PK	88.2	-33.2	1.55 H	191	20.0	35.0
4	#17595.00	43.1 AV	68.2	-25.1	1.55 H	191	8.1	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

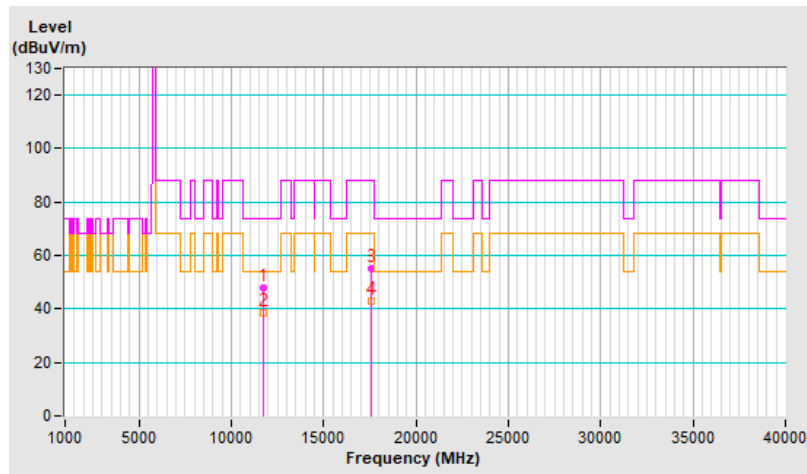




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.8 PK	74.0	-25.2	1.99 V	218	20.6	28.2
2	11730.00	39.0 AV	54.0	-15.0	1.99 V	218	10.8	28.2
3	#17595.00	55.5 PK	88.2	-32.7	1.61 V	55	20.5	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.61 V	55	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

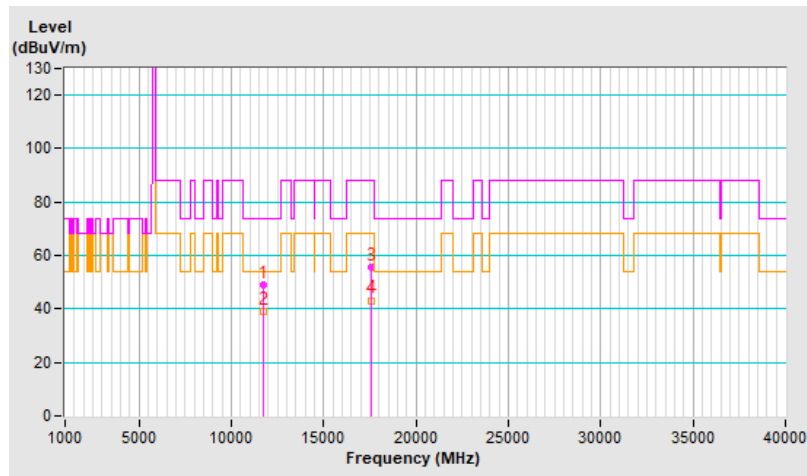


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	3.29 H	37	20.0	28.1
2	11770.00	38.7 AV	54.0	-15.3	3.29 H	37	10.6	28.1
3	#17655.00	55.5 PK	88.2	-32.7	1.47 H	196	19.9	35.6
4	#17655.00	43.4 AV	68.2	-24.8	1.47 H	196	7.8	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

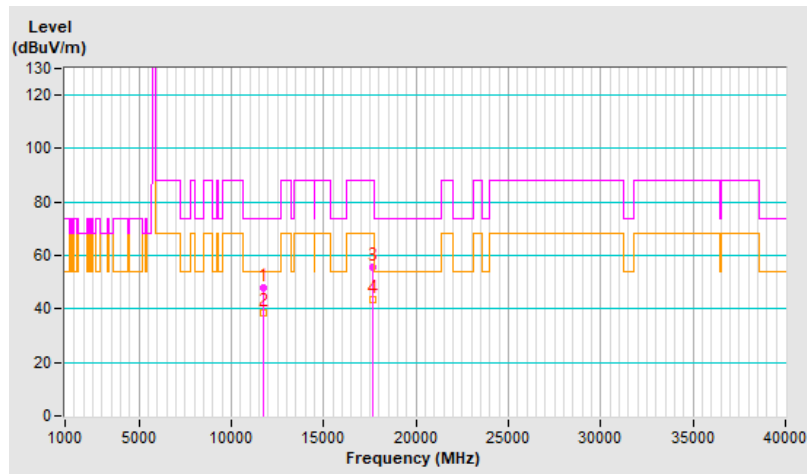


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	1.94 V	217	20.3	28.1
2	11770.00	39.1 AV	54.0	-14.9	1.94 V	217	11.0	28.1
3	#17655.00	55.1 PK	88.2	-33.1	1.58 V	50	19.5	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.58 V	50	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

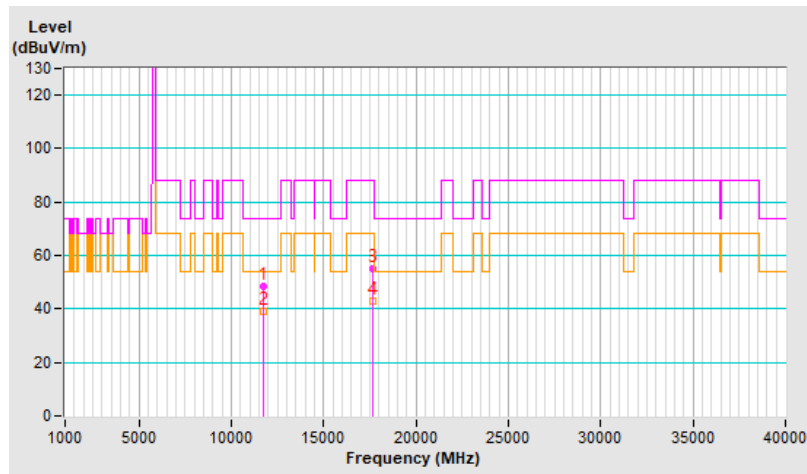


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.6 PK	74.0	-26.4	3.30 H	48	19.2	28.4
2	11690.00	38.3 AV	54.0	-15.7	3.30 H	48	9.9	28.4
3	#17535.00	55.1 PK	88.2	-33.1	1.45 H	170	20.6	34.5
4	#17535.00	43.2 AV	68.2	-25.0	1.45 H	170	8.7	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

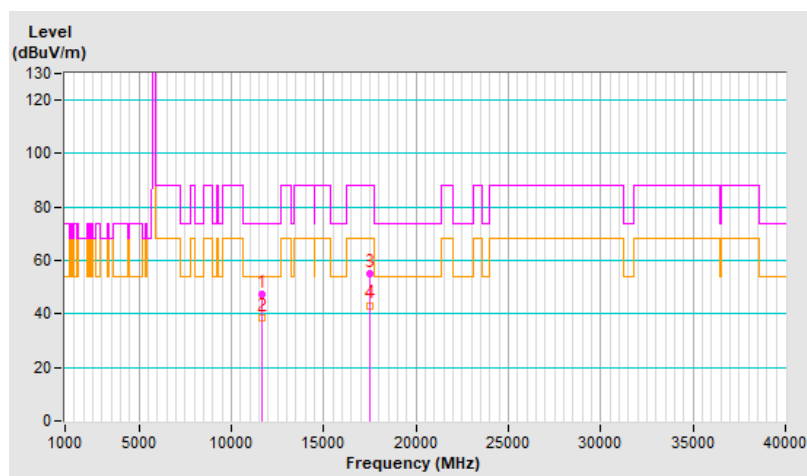


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	1.96 V	211	20.1	28.4
2	11690.00	38.8 AV	54.0	-15.2	1.96 V	211	10.4	28.4
3	#17535.00	55.3 PK	88.2	-32.9	1.60 V	58	20.8	34.5
4	#17535.00	43.5 AV	68.2	-24.7	1.60 V	58	9.0	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

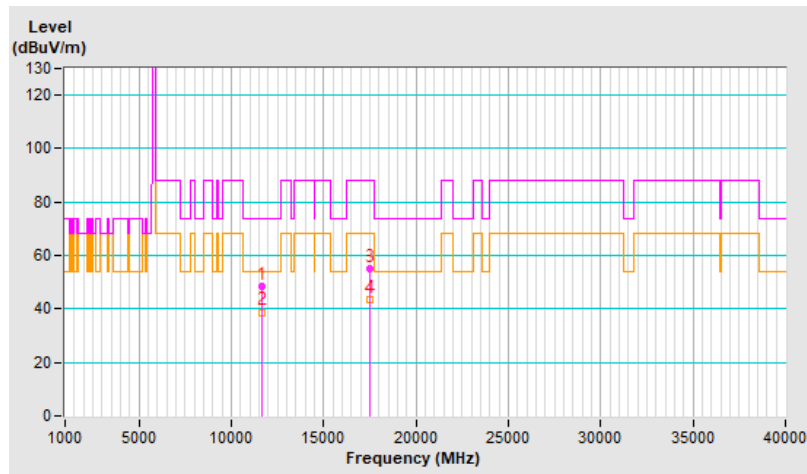


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.26 H	44	19.9	28.2
2	11730.00	38.8 AV	54.0	-15.2	3.26 H	44	10.6	28.2
3	#17595.00	55.2 PK	88.2	-33.0	1.51 H	175	20.2	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.51 H	175	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

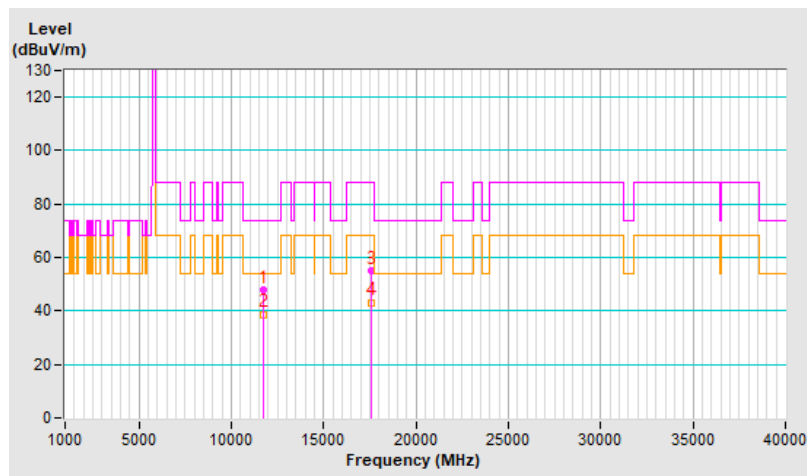


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	1.94 V	208	20.2	28.2
2	11730.00	38.6 AV	54.0	-15.4	1.94 V	208	10.4	28.2
3	#17595.00	55.2 PK	88.2	-33.0	1.60 V	49	20.2	35.0
4	#17595.00	43.1 AV	68.2	-25.1	1.60 V	49	8.1	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

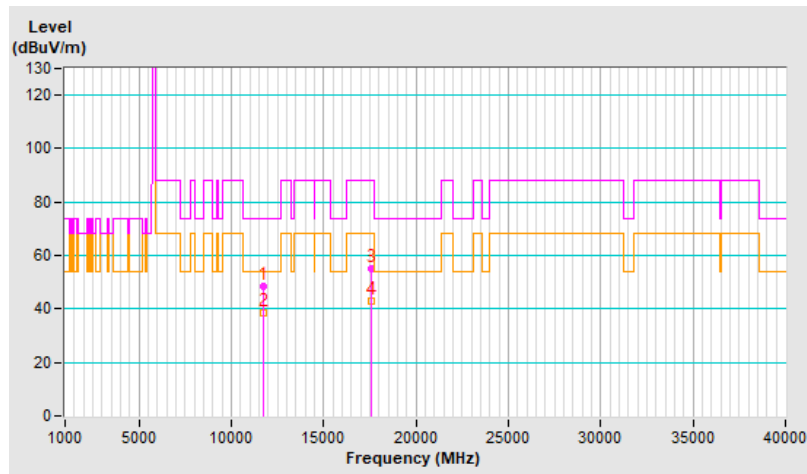


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.8 PK	74.0	-26.2	3.24 H	61	19.7	28.1
2	11770.00	38.6 AV	54.0	-15.4	3.24 H	61	10.5	28.1
3	#17655.00	54.9 PK	88.2	-33.3	1.48 H	195	19.3	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.48 H	195	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

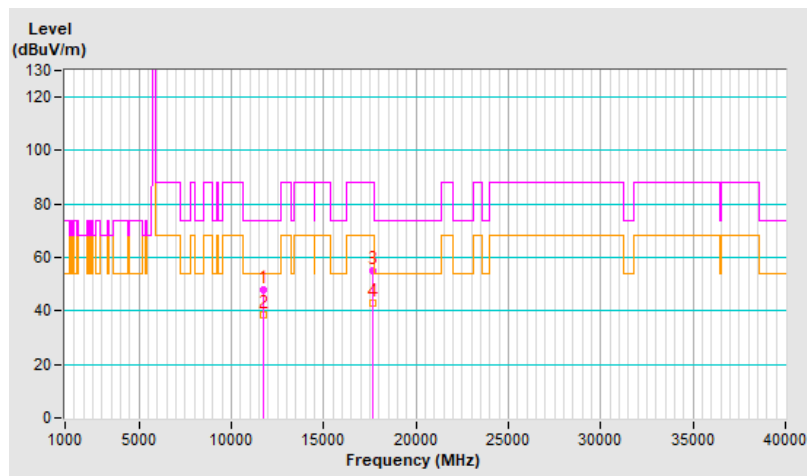


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	1.97 V	220	20.5	28.1
2	11770.00	38.8 AV	54.0	-15.2	1.97 V	220	10.7	28.1
3	#17655.00	55.5 PK	88.2	-32.7	1.59 V	68	19.9	35.6
4	#17655.00	43.4 AV	68.2	-24.8	1.59 V	68	7.8	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

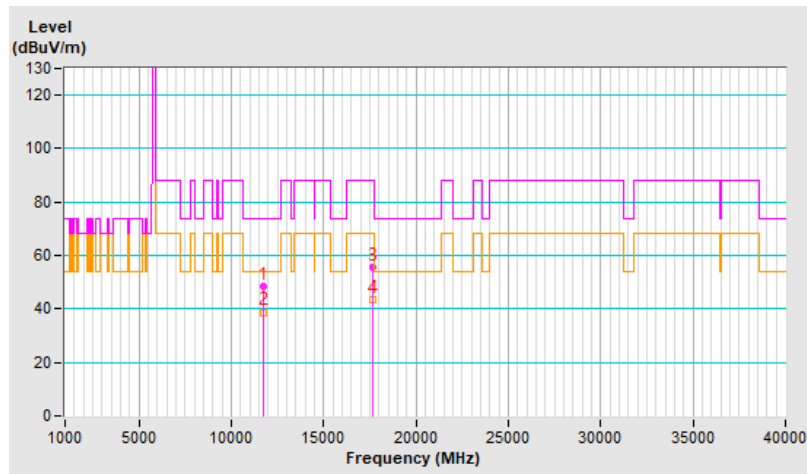


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.24 H	50	20.1	28.4
2	11690.00	39.1 AV	54.0	-14.9	3.24 H	50	10.7	28.4
3	#17535.00	55.0 PK	88.2	-33.2	1.51 H	179	20.5	34.5
4	#17535.00	43.2 AV	68.2	-25.0	1.51 H	179	8.7	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

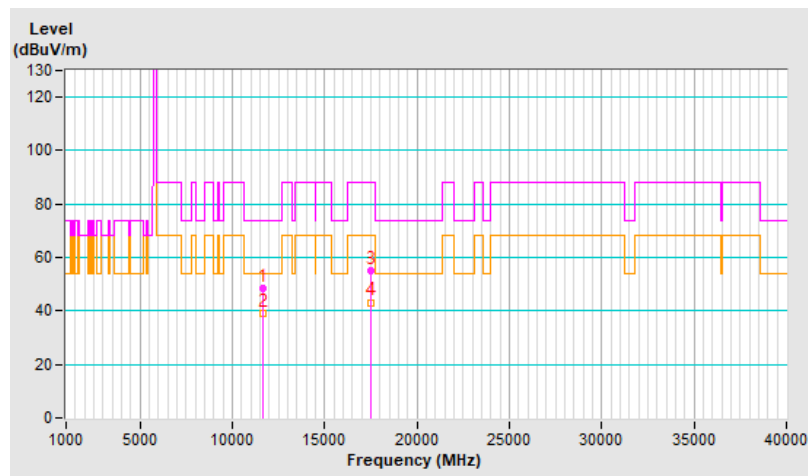


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.1 PK	74.0	-25.9	1.97 V	222	19.7	28.4
2	11690.00	38.4 AV	54.0	-15.6	1.97 V	222	10.0	28.4
3	#17535.00	54.8 PK	88.2	-33.4	1.64 V	44	20.3	34.5
4	#17535.00	42.7 AV	68.2	-25.5	1.64 V	44	8.2	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

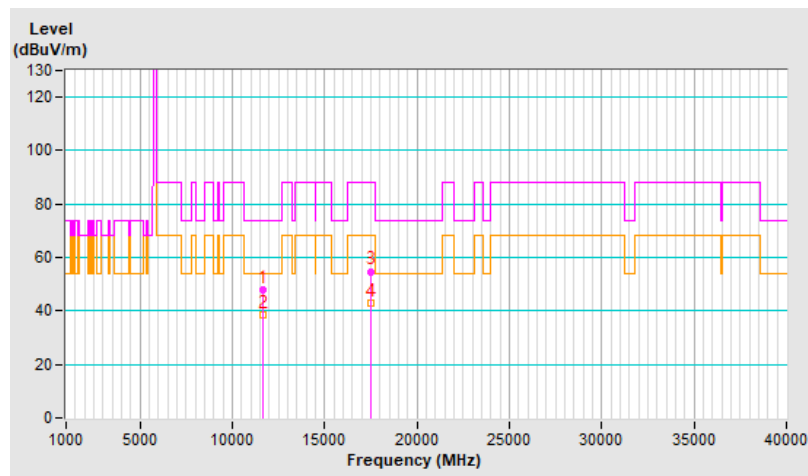


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.0 PK	74.0	-26.0	3.22 H	52	19.8	28.2
2	11730.00	38.5 AV	54.0	-15.5	3.22 H	52	10.3	28.2
3	#17595.00	54.8 PK	88.2	-33.4	1.53 H	197	19.8	35.0
4	#17595.00	42.9 AV	68.2	-25.3	1.53 H	197	7.9	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

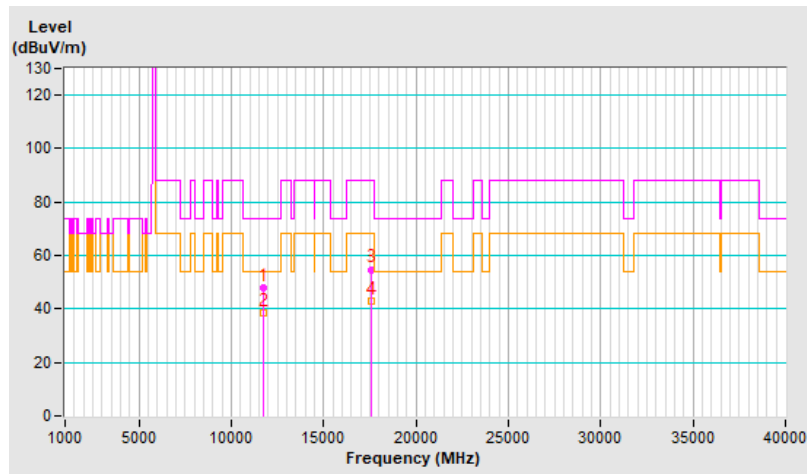


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.3 PK	74.0	-25.7	1.93 V	229	20.1	28.2
2	11730.00	38.6 AV	54.0	-15.4	1.93 V	229	10.4	28.2
3	#17595.00	54.5 PK	88.2	-33.7	1.60 V	39	19.5	35.0
4	#17595.00	42.7 AV	68.2	-25.5	1.60 V	39	7.7	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

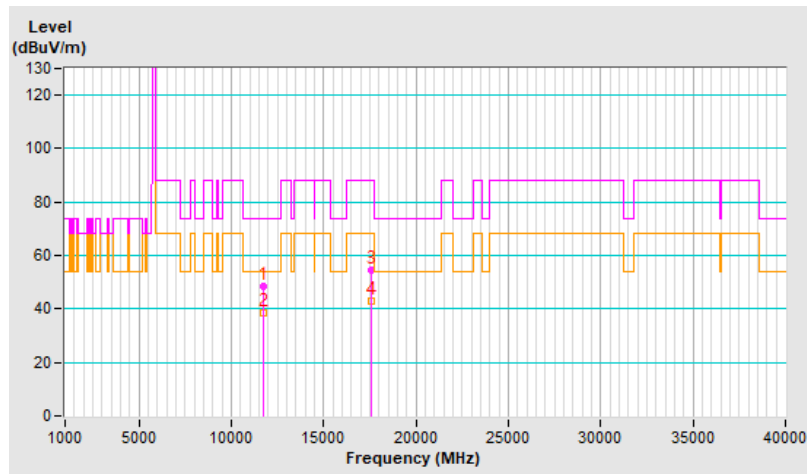


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.0 PK	74.0	-26.0	3.27 H	42	19.9	28.1
2	11770.00	38.5 AV	54.0	-15.5	3.27 H	42	10.4	28.1
3	#17655.00	55.4 PK	88.2	-32.8	1.46 H	187	19.8	35.6
4	#17655.00	43.5 AV	68.2	-24.7	1.46 H	187	7.9	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

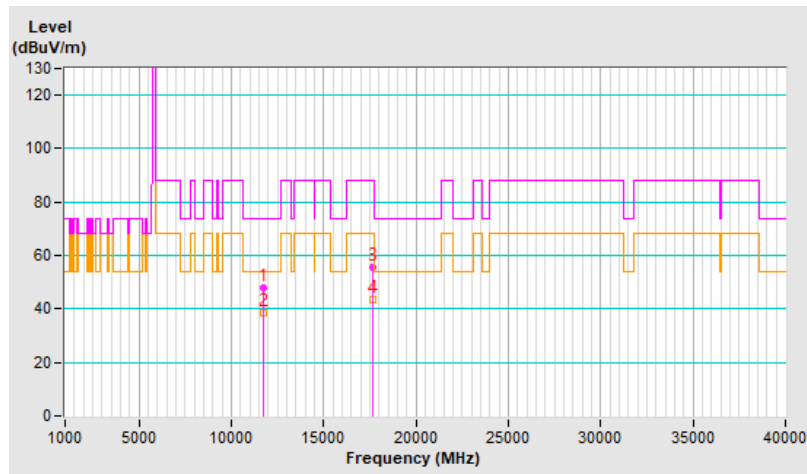


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	1.94 V	217	20.3	28.1
2	11770.00	38.6 AV	54.0	-15.4	1.94 V	217	10.5	28.1
3	#17655.00	55.1 PK	88.2	-33.1	1.65 V	60	19.5	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.65 V	60	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

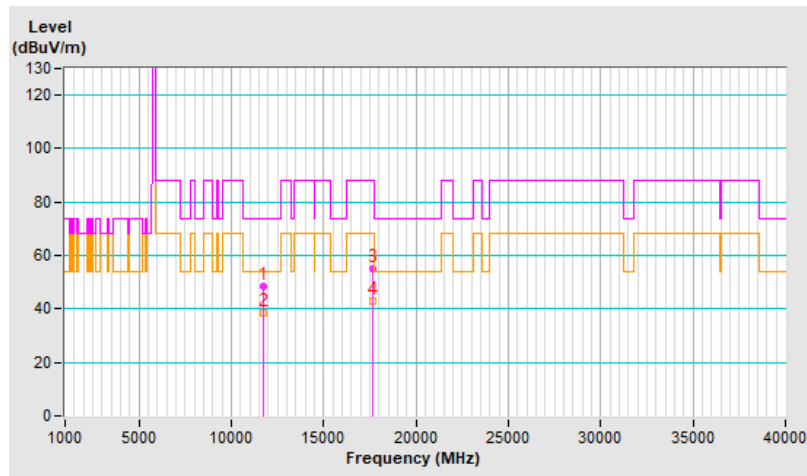


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.2 PK	74.0	-25.8	3.25 H	49	19.9	28.3
2	11710.00	38.6 AV	54.0	-15.4	3.25 H	49	10.3	28.3
3	#17565.00	55.5 PK	88.2	-32.7	1.46 H	173	20.8	34.7
4	#17565.00	43.1 AV	68.2	-25.1	1.46 H	173	8.4	34.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

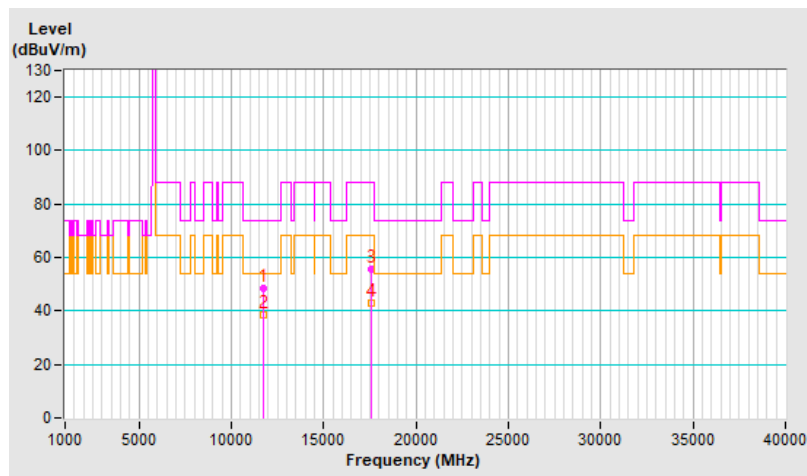


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.6 PK	74.0	-25.4	1.93 V	212	20.3	28.3
2	11710.00	38.8 AV	54.0	-15.2	1.93 V	212	10.5	28.3
3	#17565.00	54.8 PK	88.2	-33.4	1.56 V	60	20.1	34.7
4	#17565.00	42.9 AV	68.2	-25.3	1.56 V	60	8.2	34.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

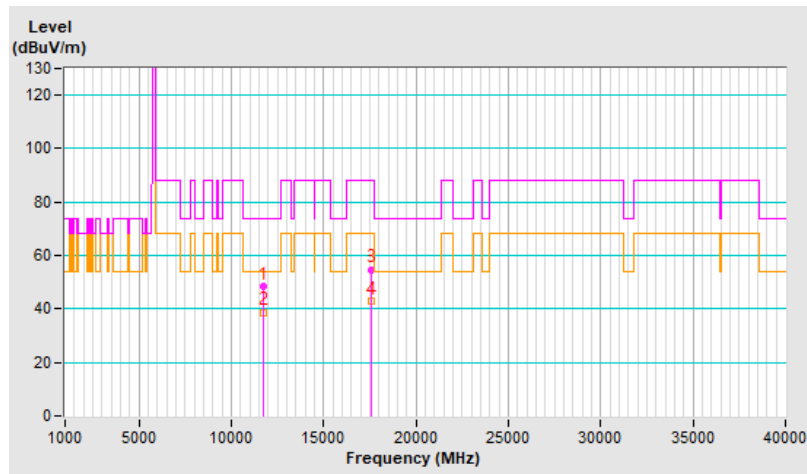


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.1 PK	74.0	-25.9	3.26 H	56	19.5	28.6
2	11630.00	38.7 AV	54.0	-15.3	3.26 H	56	10.1	28.6
3	#17445.00	55.2 PK	88.2	-33.0	1.50 H	198	21.4	33.8
4	#17445.00	43.3 AV	68.2	-24.9	1.50 H	198	9.5	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

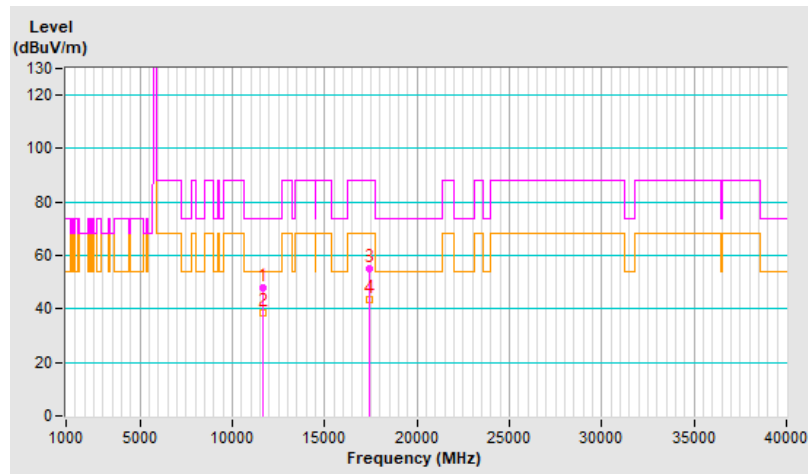


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.0 PK	74.0	-26.0	1.93 V	229	19.4	28.6
2	11630.00	38.5 AV	54.0	-15.5	1.93 V	229	9.9	28.6
3	#17445.00	55.0 PK	88.2	-33.2	1.57 V	60	21.2	33.8
4	#17445.00	43.1 AV	68.2	-25.1	1.57 V	60	9.3	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

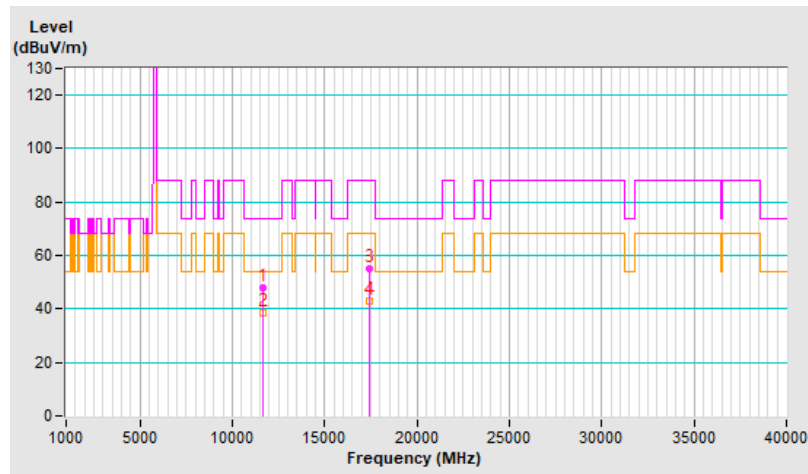


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.6 PK	74.0	-26.4	3.27 H	35	19.0	28.6
2	11630.00	38.4 AV	54.0	-15.6	3.27 H	35	9.8	28.6
3	#17445.00	55.2 PK	88.2	-33.0	1.51 H	174	21.4	33.8
4	#17445.00	43.2 AV	68.2	-25.0	1.51 H	174	9.4	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

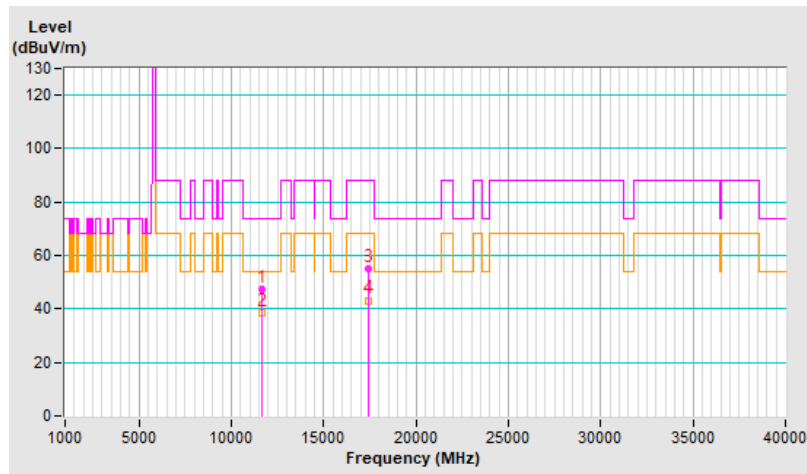


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.7 PK	74.0	-25.3	1.96 V	226	20.1	28.6
2	11630.00	38.8 AV	54.0	-15.2	1.96 V	226	10.2	28.6
3	#17445.00	54.8 PK	88.2	-33.4	1.64 V	47	21.0	33.8
4	#17445.00	42.8 AV	68.2	-25.4	1.64 V	47	9.0	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

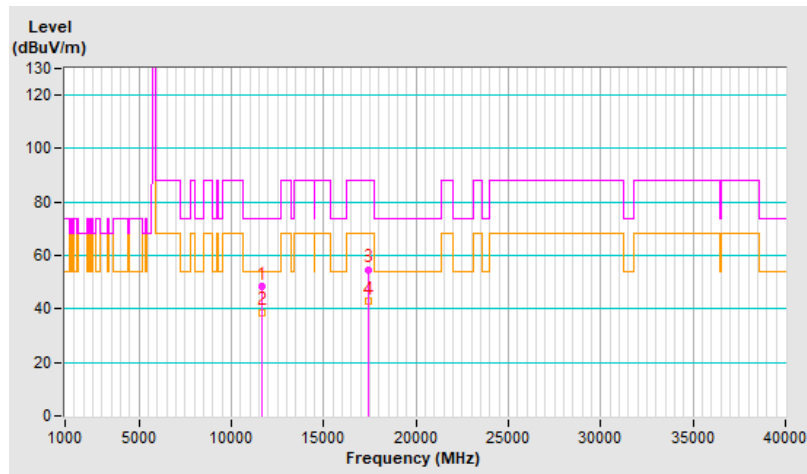


For 2TX

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	3.28 H	38	20.0	28.4
2	11690.00	38.4 AV	54.0	-15.6	3.28 H	38	10.0	28.4
3	#17535.00	55.4 PK	88.2	-32.8	1.46 H	181	20.9	34.5
4	#17535.00	43.4 AV	68.2	-24.8	1.46 H	181	8.9	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

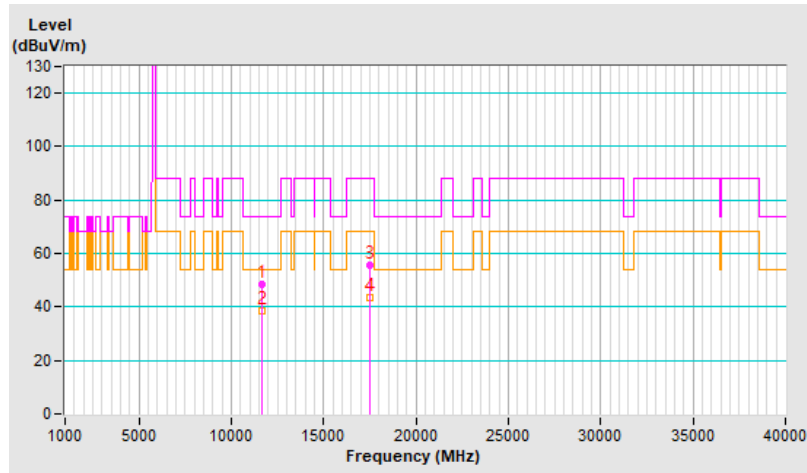


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	1.98 V	205	19.9	28.4
2	11690.00	38.5 AV	54.0	-15.5	1.98 V	205	10.1	28.4
3	#17535.00	55.1 PK	88.2	-33.1	1.64 V	52	20.6	34.5
4	#17535.00	43.0 AV	68.2	-25.2	1.64 V	52	8.5	34.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

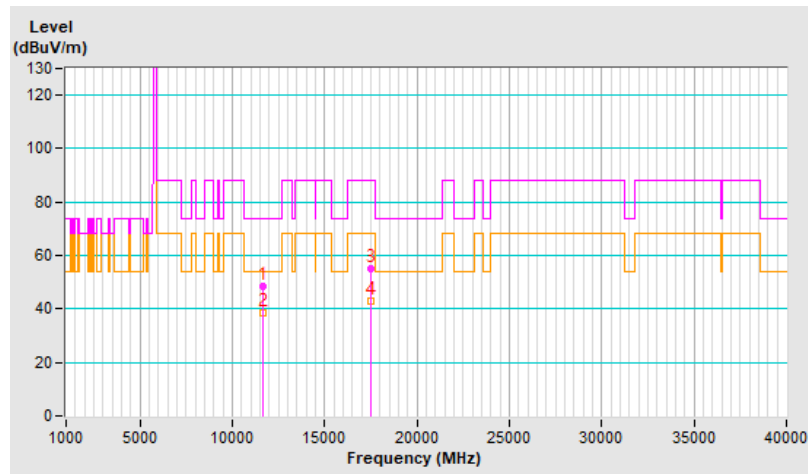


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	47.8 PK	74.0	-26.2	3.33 H	53	19.6	28.2
2	11730.00	38.1 AV	54.0	-15.9	3.33 H	53	9.9	28.2
3	#17595.00	54.8 PK	88.2	-33.4	1.49 H	168	19.8	35.0
4	#17595.00	42.9 AV	68.2	-25.3	1.49 H	168	7.9	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

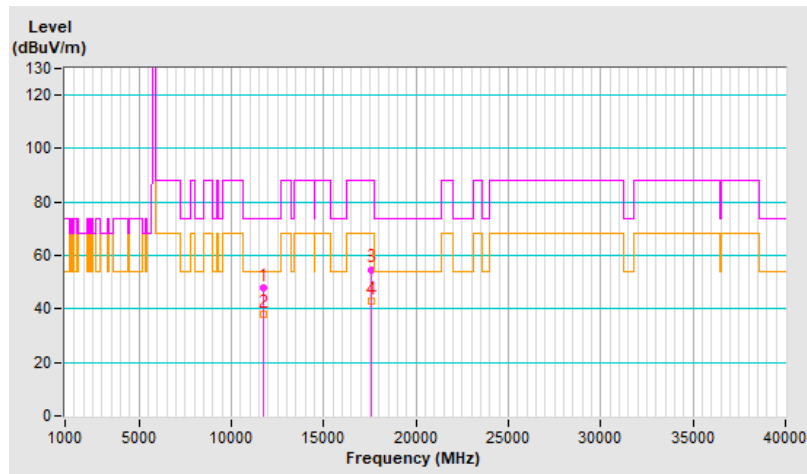


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	1.97 V	212	20.0	28.2
2	11730.00	38.4 AV	54.0	-15.6	1.97 V	212	10.2	28.2
3	#17595.00	55.2 PK	88.2	-33.0	1.68 V	56	20.2	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.68 V	56	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

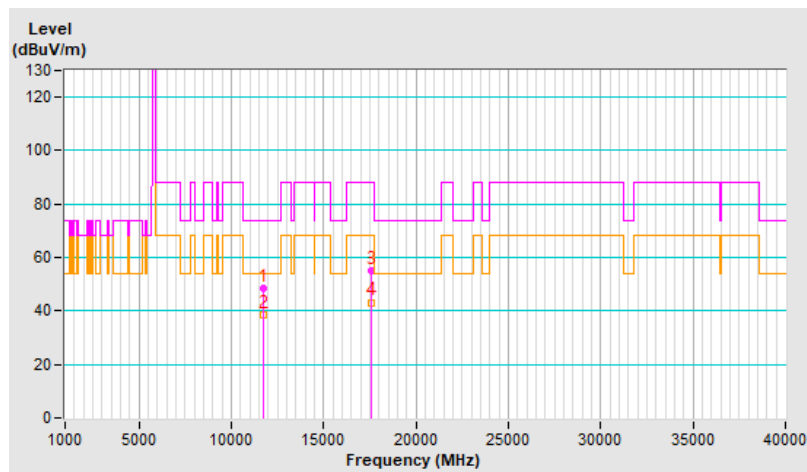


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	3.32 H	39	20.0	28.1
2	11770.00	38.2 AV	54.0	-15.8	3.32 H	39	10.1	28.1
3	#17655.00	55.0 PK	88.2	-33.2	1.45 H	170	19.4	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.45 H	170	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

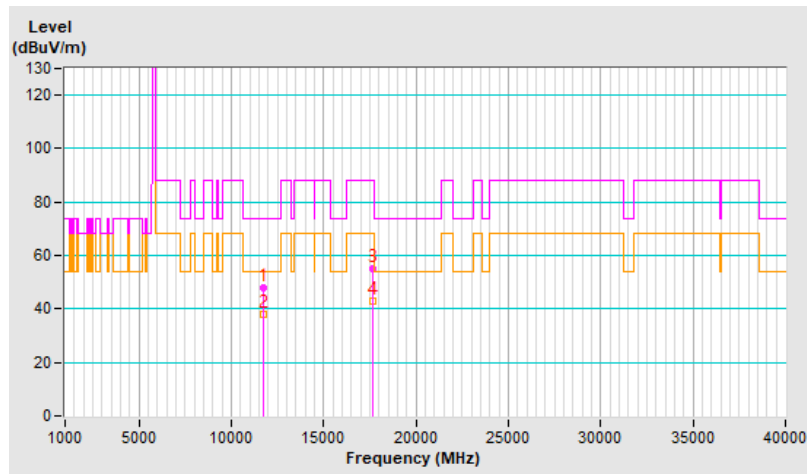


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	1.95 V	205	20.1	28.1
2	11770.00	38.6 AV	54.0	-15.4	1.95 V	205	10.5	28.1
3	#17655.00	55.2 PK	88.2	-33.0	1.60 V	40	19.6	35.6
4	#17655.00	43.2 AV	68.2	-25.0	1.60 V	40	7.6	35.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

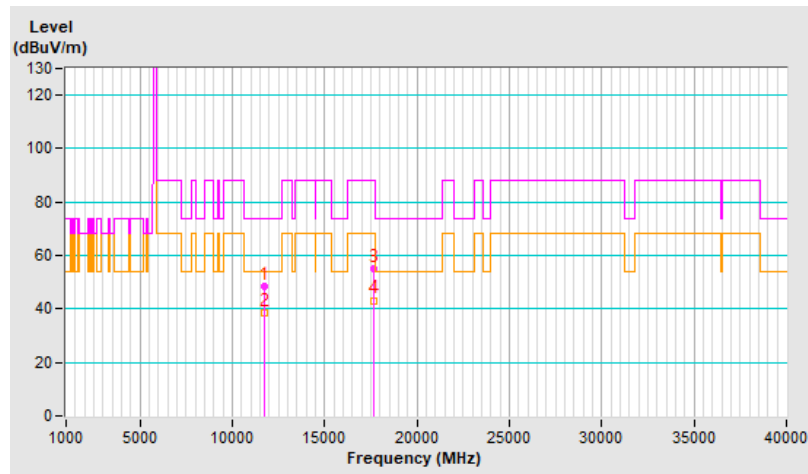


For 2S2T

RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	3.28 H	14	20.0	28.4
2	11690.00	38.9 AV	54.0	-15.1	3.28 H	14	10.5	28.4
3	#17535.00	55.6 PK	88.2	-32.6	1.38 H	202	21.1	34.5
4	#17535.00	43.6 AV	68.2	-24.6	1.38 H	202	9.1	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

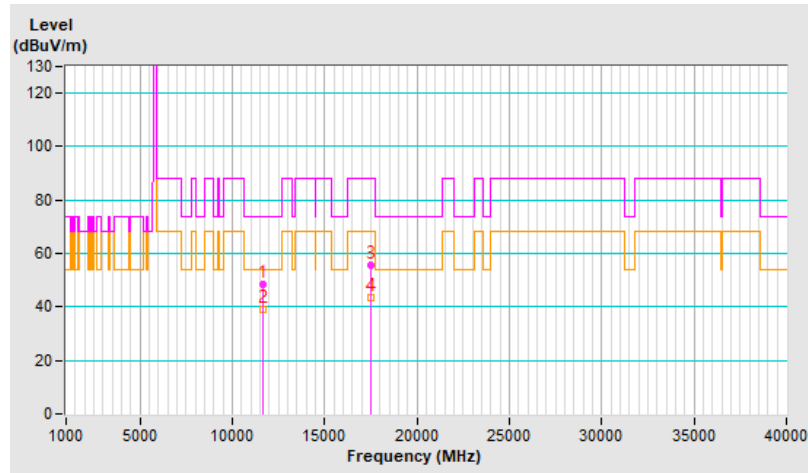


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	1.98 V	194	19.9	28.4
2	11690.00	38.5 AV	54.0	-15.5	1.98 V	194	10.1	28.4
3	#17535.00	55.7 PK	88.2	-32.5	1.60 V	57	21.2	34.5
4	#17535.00	43.5 AV	68.2	-24.7	1.60 V	57	9.0	34.5

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

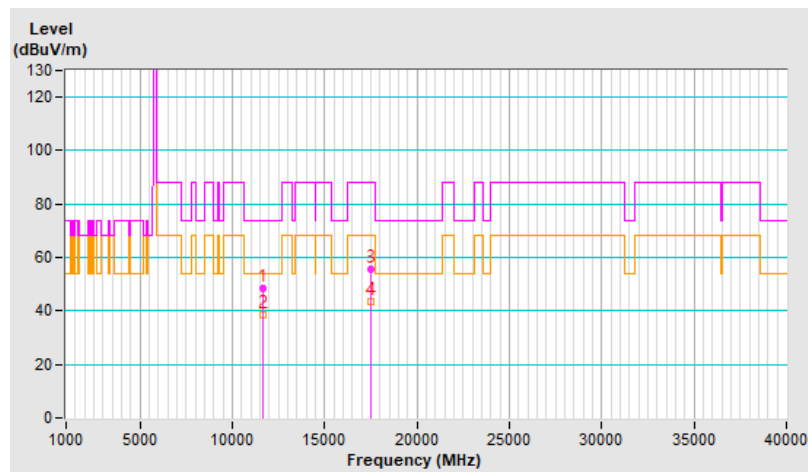


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.21 H	36	19.9	28.2
2	11730.00	38.4 AV	54.0	-15.6	3.21 H	36	10.2	28.2
3	#17595.00	55.4 PK	88.2	-32.8	1.41 H	194	20.4	35.0
4	#17595.00	43.6 AV	68.2	-24.6	1.41 H	194	8.6	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

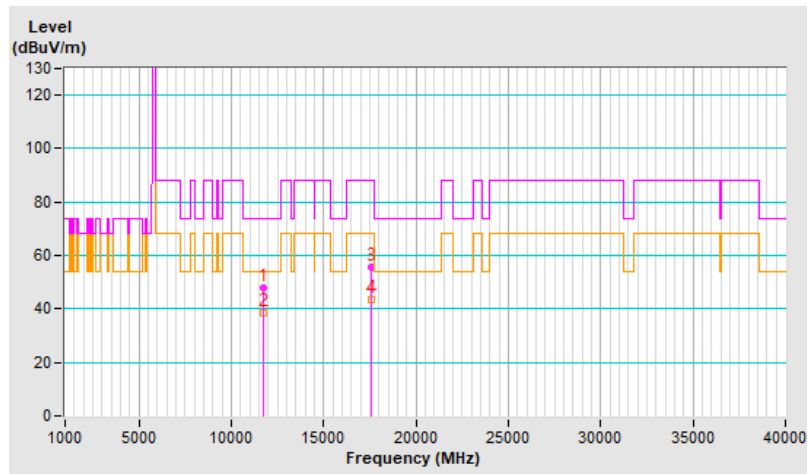


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	47.9 PK	74.0	-26.1	1.96 V	202	19.7	28.2
2	11730.00	38.2 AV	54.0	-15.8	1.96 V	202	10.0	28.2
3	#17595.00	55.2 PK	88.2	-33.0	1.63 V	39	20.2	35.0
4	#17595.00	43.1 AV	68.2	-25.1	1.63 V	39	8.1	35.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

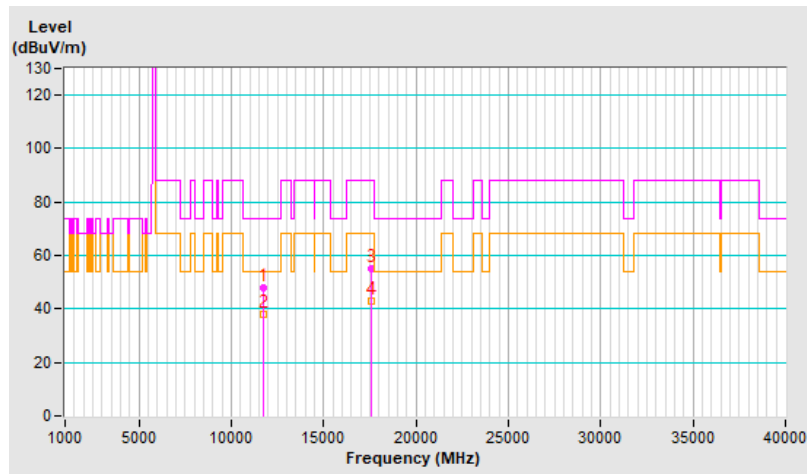


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	3.23 H	21	20.2	28.1
2	11770.00	38.8 AV	54.0	-15.2	3.23 H	21	10.7	28.1
3	#17655.00	55.2 PK	88.2	-33.0	1.43 H	204	19.6	35.6
4	#17655.00	43.3 AV	68.2	-24.9	1.43 H	204	7.7	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

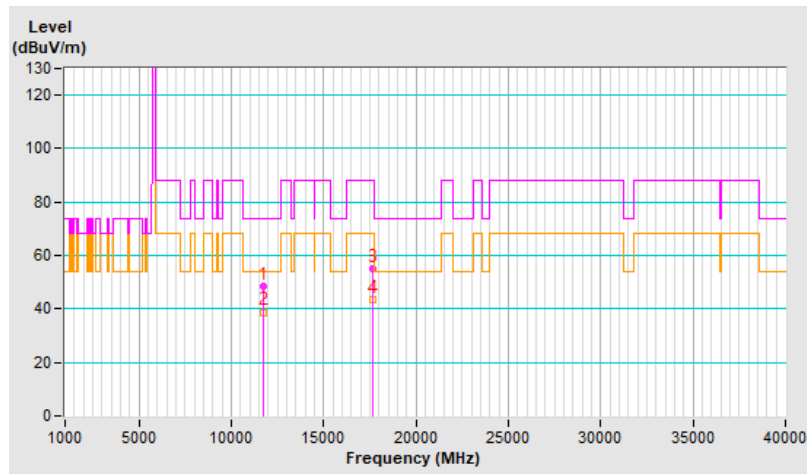


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	1.94 V	209	20.6	28.1
2	11770.00	38.6 AV	54.0	-15.4	1.94 V	209	10.5	28.1
3	#17655.00	55.0 PK	88.2	-33.2	1.58 V	68	19.4	35.6
4	#17655.00	42.9 AV	68.2	-25.3	1.58 V	68	7.3	35.6

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

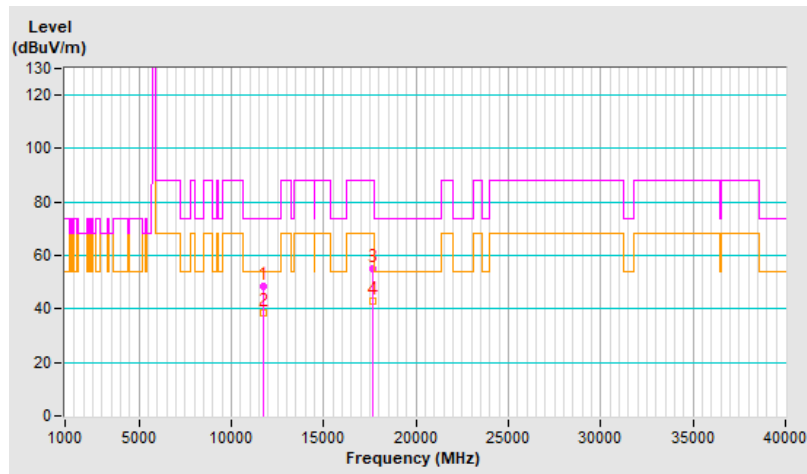


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11670.00	48.2 PK	74.0	-25.8	3.30 H	25	19.7	28.5
2	11670.00	38.4 AV	54.0	-15.6	3.30 H	25	9.9	28.5
3	#17505.00	55.6 PK	88.2	-32.6	1.45 H	204	21.4	34.2
4	#17505.00	43.8 AV	68.2	-24.4	1.45 H	204	9.6	34.2

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

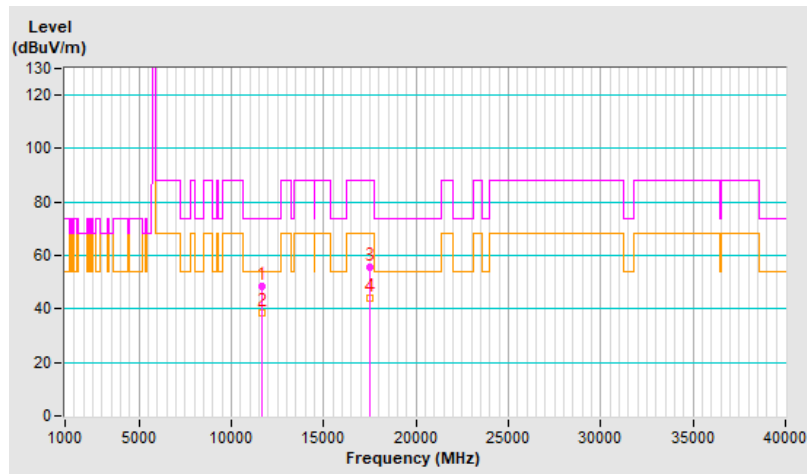


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	49.0 PK	74.0	-25.0	1.99 V	203	20.5	28.5
2	11670.00	39.0 AV	54.0	-15.0	1.99 V	203	10.5	28.5
3	#17505.00	55.0 PK	88.2	-33.2	1.67 V	55	20.8	34.2
4	#17505.00	42.8 AV	68.2	-25.4	1.67 V	55	8.6	34.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

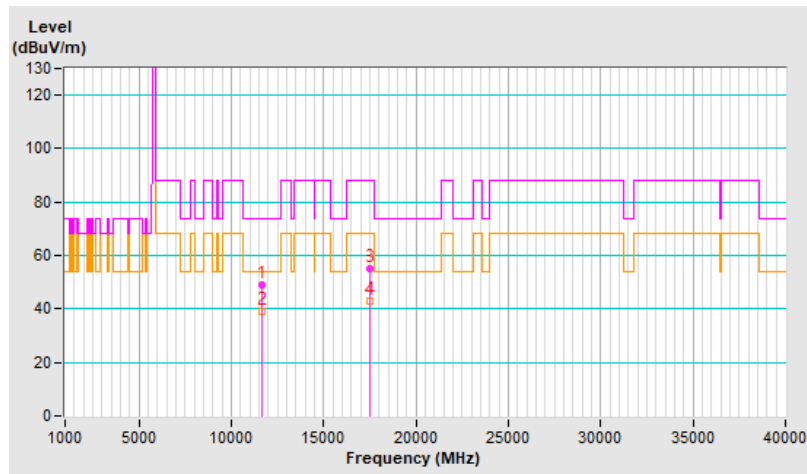


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11750.00	48.4 PK	74.0	-25.6	3.29 H	27	20.2	28.2
2	11750.00	38.9 AV	54.0	-15.1	3.29 H	27	10.7	28.2
3	#17625.00	55.5 PK	88.2	-32.7	1.45 H	206	20.2	35.3
4	#17625.00	43.4 AV	68.2	-24.8	1.45 H	206	8.1	35.3

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

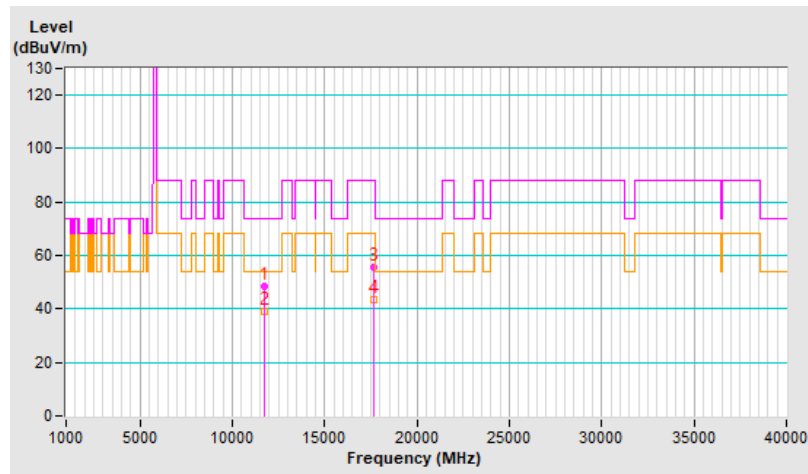


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	48.0 PK	74.0	-26.0	1.95 V	191	19.8	28.2
2	11750.00	38.3 AV	54.0	-15.7	1.95 V	191	10.1	28.2
3	#17625.00	55.4 PK	88.2	-32.8	1.59 V	54	20.1	35.3
4	#17625.00	43.2 AV	68.2	-25.0	1.59 V	54	7.9	35.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

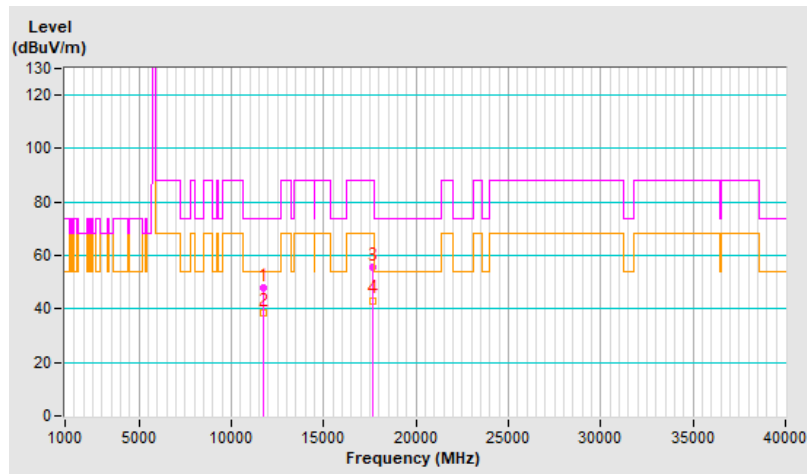


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	48.1 PK	74.0	-25.9	3.20 H	16	19.8	28.3
2	11710.00	38.4 AV	54.0	-15.6	3.20 H	16	10.1	28.3
3	#17565.00	55.3 PK	88.2	-32.9	1.47 H	206	20.6	34.7
4	#17565.00	43.3 AV	68.2	-24.9	1.47 H	206	8.6	34.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

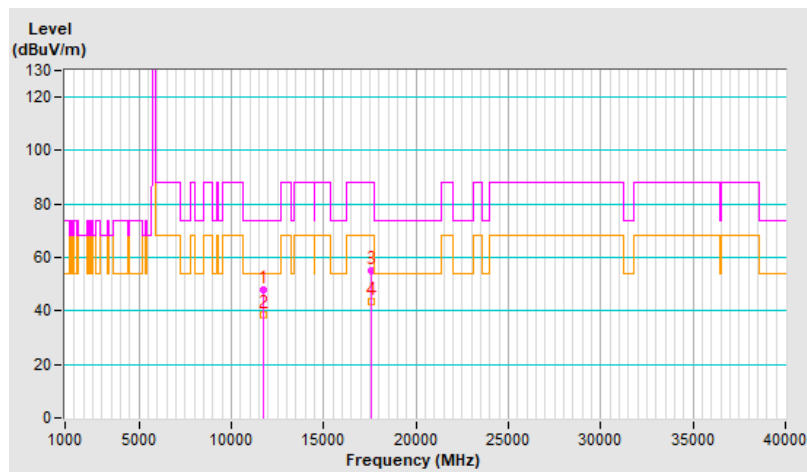


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	47.7 PK	74.0	-26.3	1.97 V	190	19.4	28.3
2	11710.00	38.2 AV	54.0	-15.8	1.97 V	190	9.9	28.3
3	#17565.00	55.3 PK	88.2	-32.9	1.58 V	67	20.6	34.7
4	#17565.00	43.2 AV	68.2	-25.0	1.58 V	67	8.5	34.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

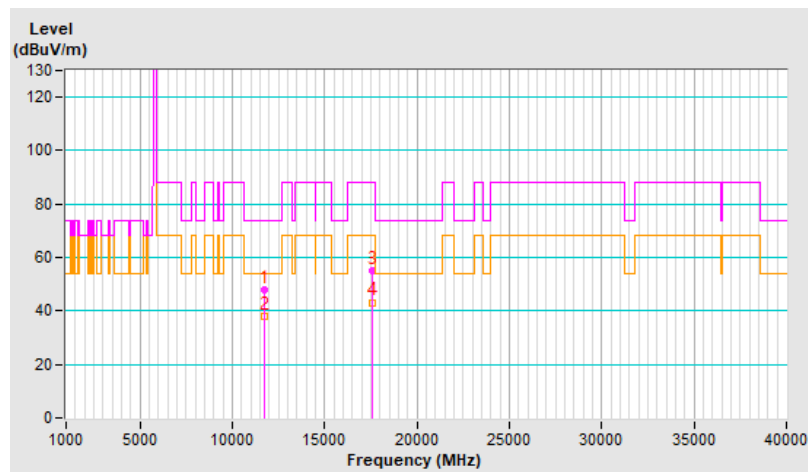


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.5 PK	74.0	-25.5	3.26 H	13	19.9	28.6
2	11630.00	38.6 AV	54.0	-15.4	3.26 H	13	10.0	28.6
3	#17445.00	55.7 PK	88.2	-32.5	1.40 H	198	21.9	33.8
4	#17445.00	43.6 AV	68.2	-24.6	1.40 H	198	9.8	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

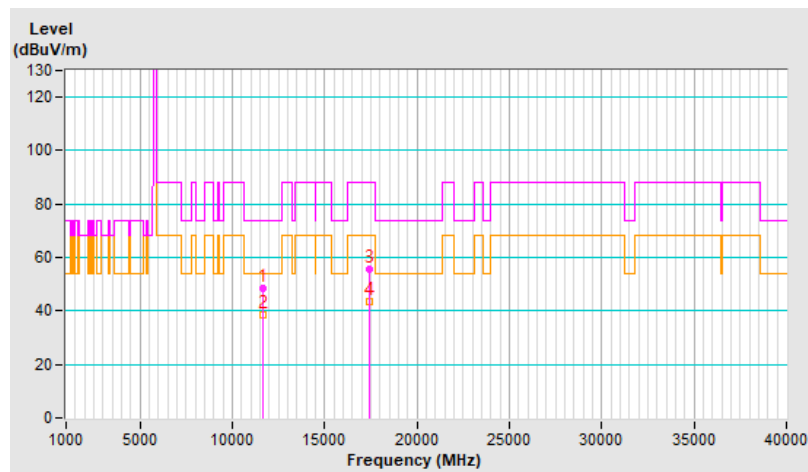


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.4 PK	74.0	-25.6	2.01 V	208	19.8	28.6
2	11630.00	38.5 AV	54.0	-15.5	2.01 V	208	9.9	28.6
3	#17445.00	55.2 PK	88.2	-33.0	1.64 V	68	21.4	33.8
4	#17445.00	43.3 AV	68.2	-24.9	1.64 V	68	9.5	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

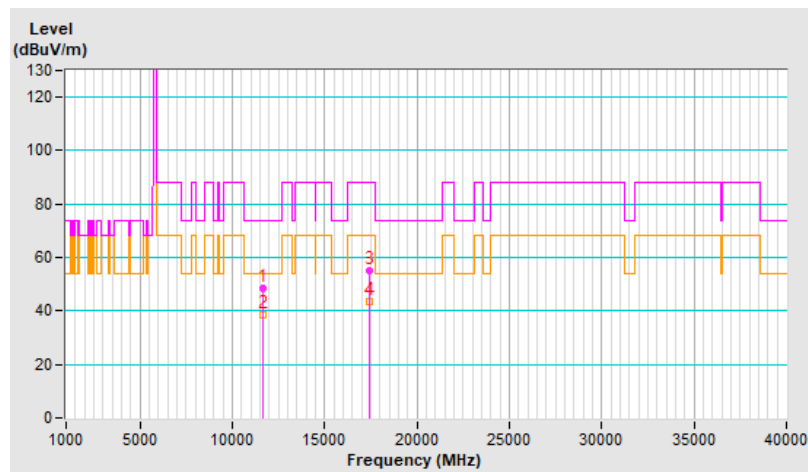


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.8 PK	74.0	-25.2	3.15 H	27	20.4	28.4
2	11690.00	40.5 AV	54.0	-13.5	3.15 H	27	12.1	28.4
3	#17535.00	53.3 PK	88.2	-34.9	1.28 H	184	18.8	34.5
4	#17535.00	43.1 AV	68.2	-25.1	1.28 H	184	8.6	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

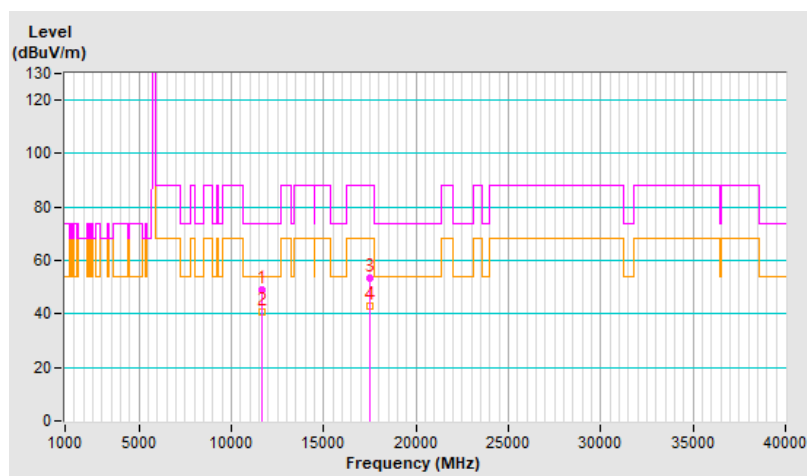


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.2 PK	74.0	-24.8	1.88 V	205	20.8	28.4
2	11690.00	41.2 AV	54.0	-12.8	1.88 V	205	12.8	28.4
3	#17535.00	53.7 PK	88.2	-34.5	1.46 V	54	19.2	34.5
4	#17535.00	43.3 AV	68.2	-24.9	1.46 V	54	8.8	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

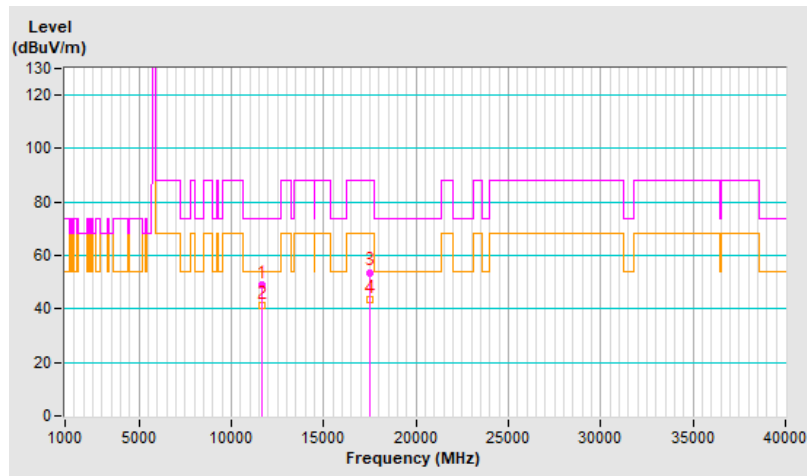


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.12 H	17	20.7	28.2
2	11730.00	40.6 AV	54.0	-13.4	3.12 H	17	12.4	28.2
3	#17595.00	53.4 PK	88.2	-34.8	1.34 H	186	18.4	35.0
4	#17595.00	42.9 AV	68.2	-25.3	1.34 H	186	7.9	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

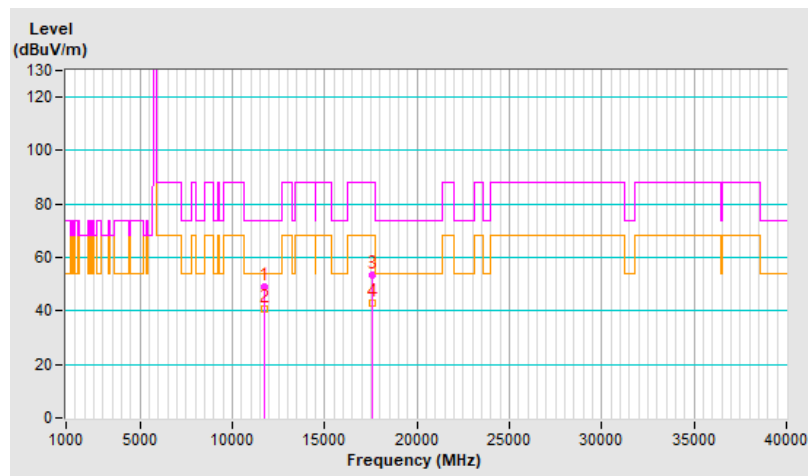


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.0 PK	74.0	-25.0	1.88 V	201	20.8	28.2
2	11730.00	41.2 AV	54.0	-12.8	1.88 V	201	13.0	28.2
3	#17595.00	53.8 PK	88.2	-34.4	1.40 V	49	18.8	35.0
4	#17595.00	43.5 AV	68.2	-24.7	1.40 V	49	8.5	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

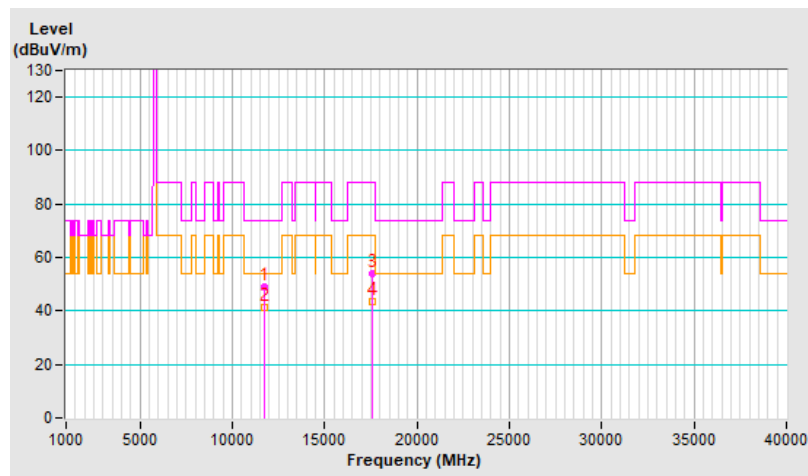


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.3 PK	74.0	-24.7	3.09 H	17	21.2	28.1
2	11770.00	40.9 AV	54.0	-13.1	3.09 H	17	12.8	28.1
3	#17655.00	54.0 PK	88.2	-34.2	1.22 H	177	18.4	35.6
4	#17655.00	43.6 AV	68.2	-24.6	1.22 H	177	8.0	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

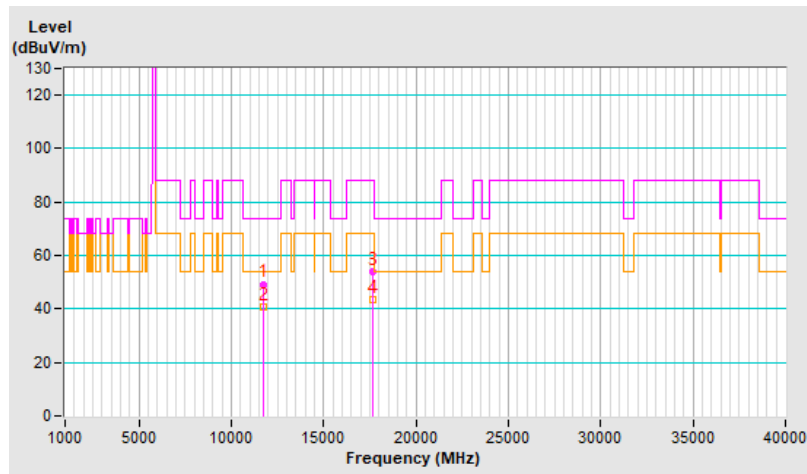


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	1.91 V	199	20.8	28.1
2	11770.00	40.9 AV	54.0	-13.1	1.91 V	199	12.8	28.1
3	#17655.00	53.8 PK	88.2	-34.4	1.48 V	68	18.2	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.48 V	68	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

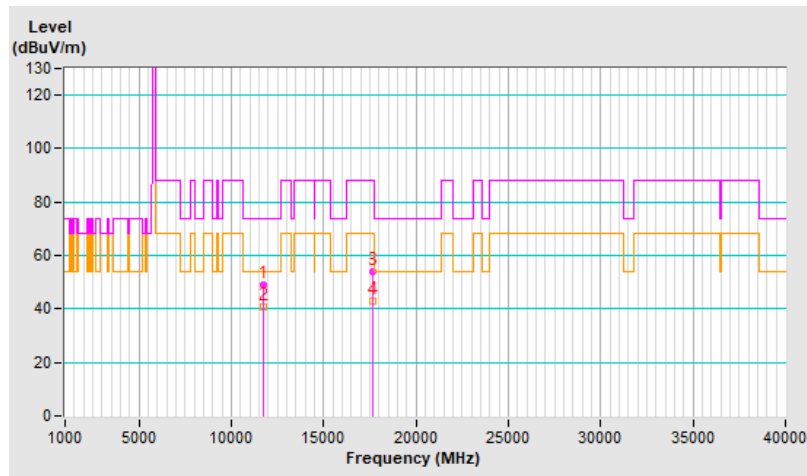


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.3 PK	74.0	-25.7	3.21 H	49	19.9	28.4
2	11690.00	40.0 AV	54.0	-14.0	3.21 H	49	11.6	28.4
3	#17535.00	53.8 PK	88.2	-34.4	1.32 H	203	19.3	34.5
4	#17535.00	43.4 AV	68.2	-24.8	1.32 H	203	8.9	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

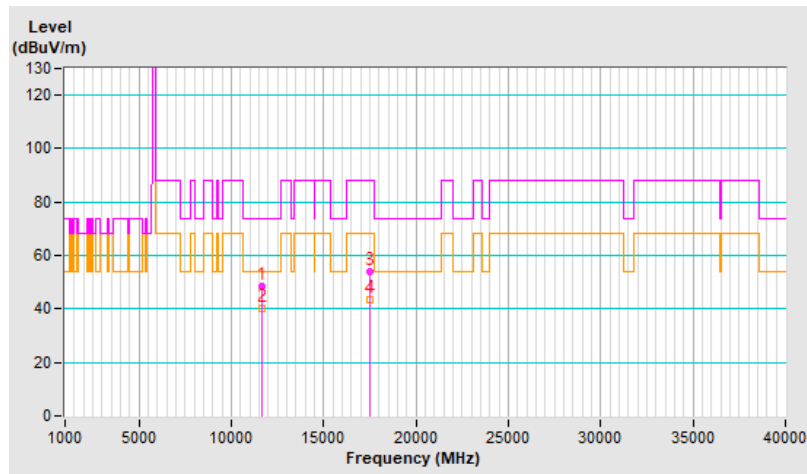


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.0 PK	74.0	-25.0	1.99 V	251	20.6	28.4
2	11690.00	41.2 AV	54.0	-12.8	1.99 V	251	12.8	28.4
3	#17535.00	54.2 PK	88.2	-34.0	1.52 V	38	19.7	34.5
4	#17535.00	43.2 AV	68.2	-25.0	1.52 V	38	8.7	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

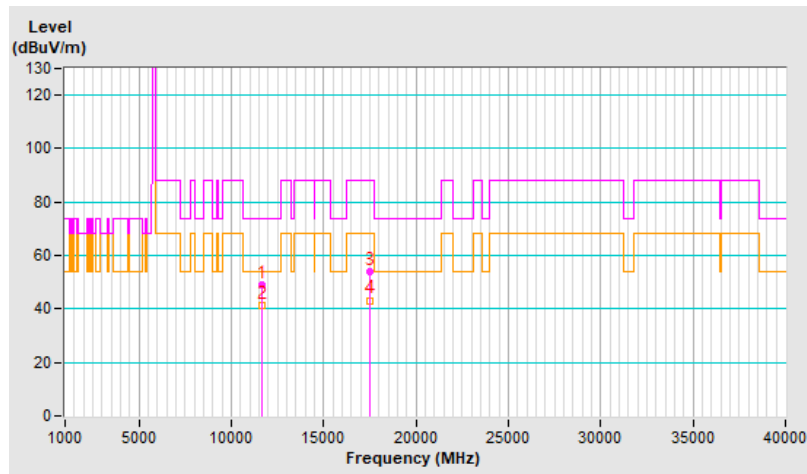


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.16 H	49	20.7	28.2
2	11730.00	40.5 AV	54.0	-13.5	3.16 H	49	12.3	28.2
3	#17595.00	53.3 PK	88.2	-34.9	1.35 H	207	18.3	35.0
4	#17595.00	43.2 AV	68.2	-25.0	1.35 H	207	8.2	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

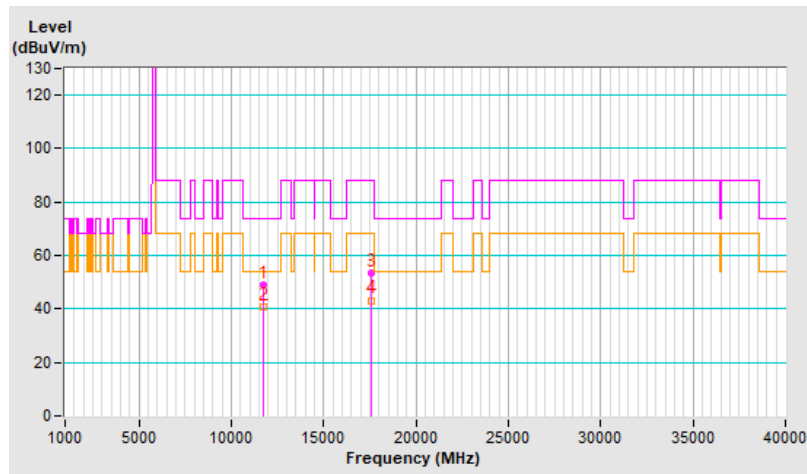


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.8 PK	74.0	-25.2	2.02 V	217	20.6	28.2
2	11730.00	41.0 AV	54.0	-13.0	2.02 V	217	12.8	28.2
3	#17595.00	53.5 PK	88.2	-34.7	1.41 V	60	18.5	35.0
4	#17595.00	43.3 AV	68.2	-24.9	1.41 V	60	8.3	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

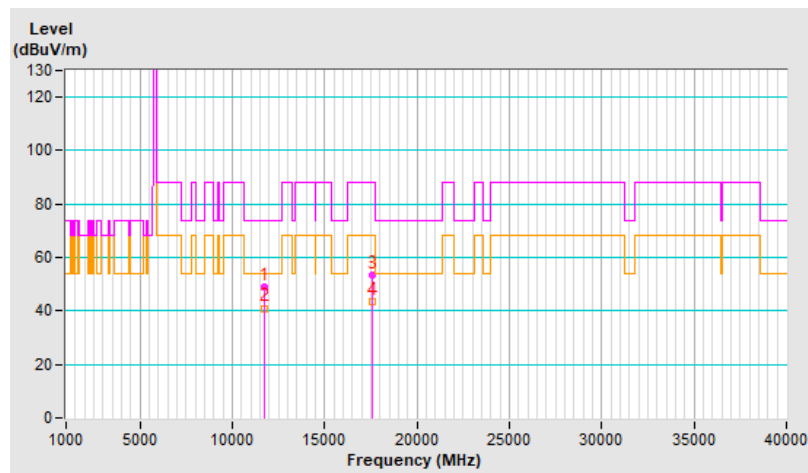


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.8 PK	74.0	-25.2	3.12 H	28	20.7	28.1
2	11770.00	40.4 AV	54.0	-13.6	3.12 H	28	12.3	28.1
3	#17655.00	54.2 PK	88.2	-34.0	1.35 H	217	18.6	35.6
4	#17655.00	43.9 AV	68.2	-24.3	1.35 H	217	8.3	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

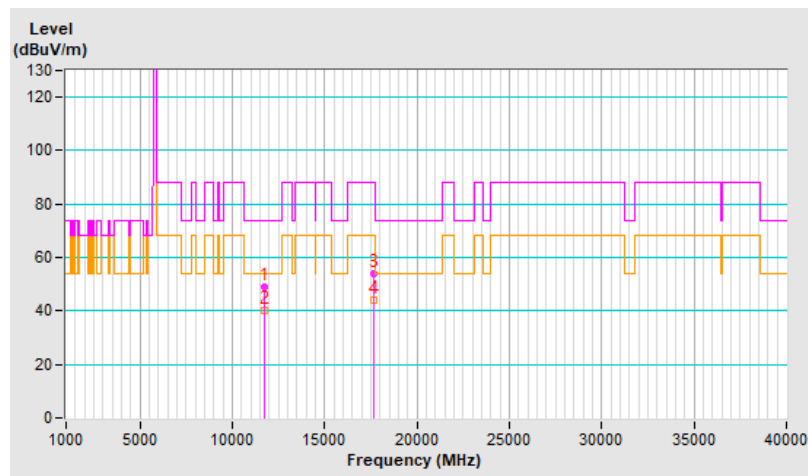


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	2.01 V	214	20.8	28.1
2	11770.00	41.4 AV	54.0	-12.6	2.01 V	214	13.3	28.1
3	#17655.00	53.0 PK	88.2	-35.2	1.41 V	67	17.4	35.6
4	#17655.00	42.9 AV	68.2	-25.3	1.41 V	67	7.3	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

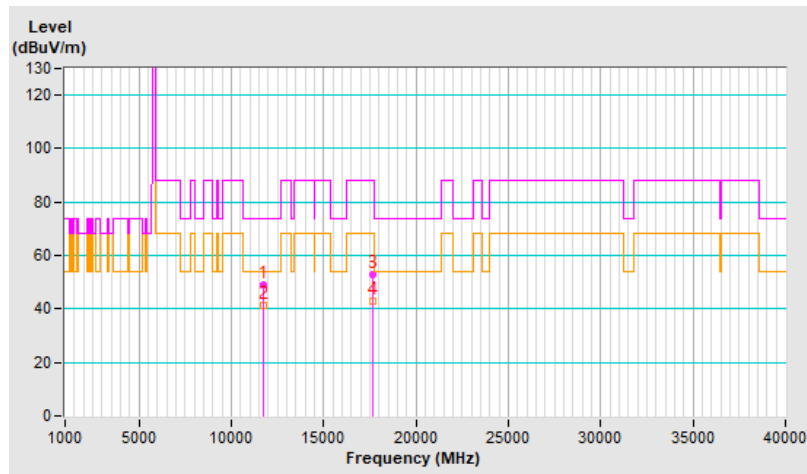


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.16 H	20	20.2	28.4
2	11690.00	40.6 AV	54.0	-13.4	3.16 H	20	12.2	28.4
3	#17535.00	51.6 PK	88.2	-36.6	1.21 H	179	17.1	34.5
4	#17535.00	43.2 AV	68.2	-25.0	1.21 H	179	8.7	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

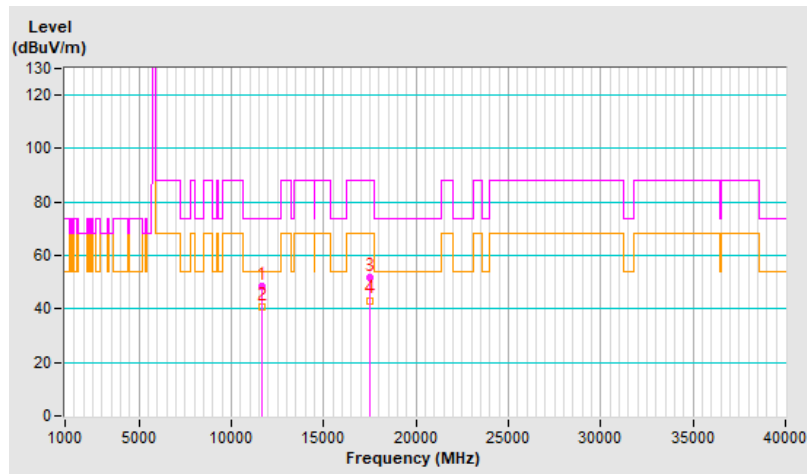


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.6 PK	74.0	-24.4	1.78 V	179	21.2	28.4
2	11690.00	41.5 AV	54.0	-12.5	1.78 V	179	13.1	28.4
3	#17535.00	52.3 PK	88.2	-35.9	1.34 V	92	17.8	34.5
4	#17535.00	42.9 AV	68.2	-25.3	1.34 V	92	8.4	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

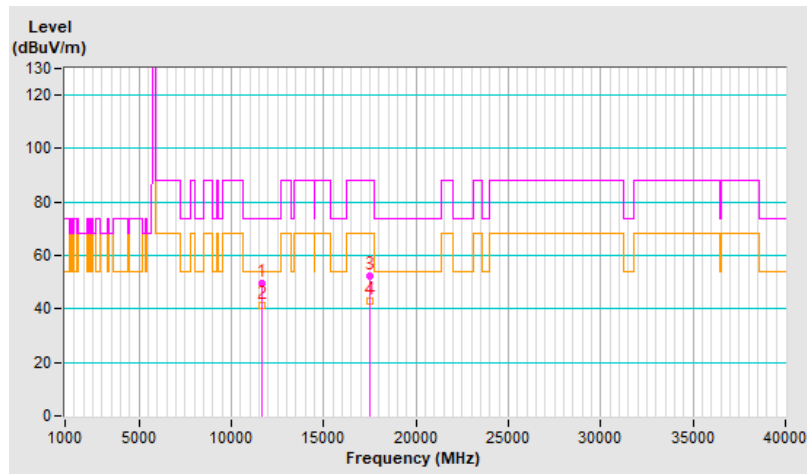


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.0 PK	74.0	-25.0	3.19 H	57	20.8	28.2
2	11730.00	41.0 AV	54.0	-13.0	3.19 H	57	12.8	28.2
3	#17595.00	52.4 PK	88.2	-35.8	1.38 H	194	17.4	35.0
4	#17595.00	42.8 AV	68.2	-25.4	1.38 H	194	7.8	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

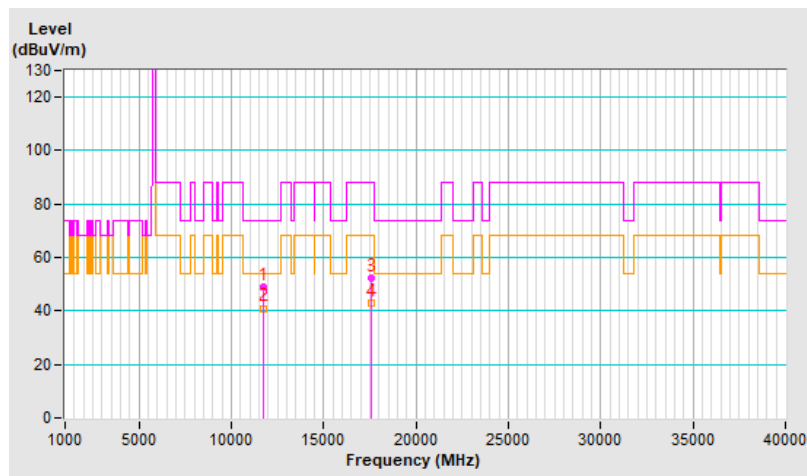


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	2.06 V	225	20.2	28.2
2	11730.00	40.7 AV	54.0	-13.3	2.06 V	225	12.5	28.2
3	#17595.00	53.9 PK	88.2	-34.3	1.37 V	24	18.9	35.0
4	#17595.00	43.4 AV	68.2	-24.8	1.37 V	24	8.4	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

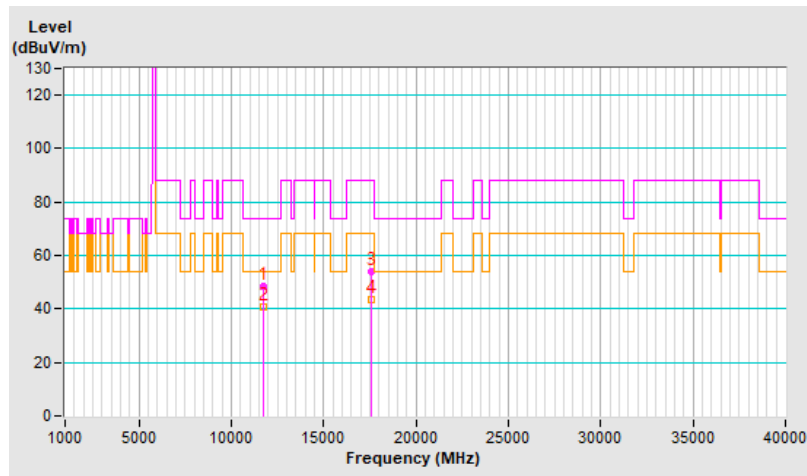


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.1 PK	74.0	-24.9	3.17 H	42	21.0	28.1
2	11770.00	41.4 AV	54.0	-12.6	3.17 H	42	13.3	28.1
3	#17655.00	53.2 PK	88.2	-35.0	1.27 H	212	17.6	35.6
4	#17655.00	43.1 AV	68.2	-25.1	1.27 H	212	7.5	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

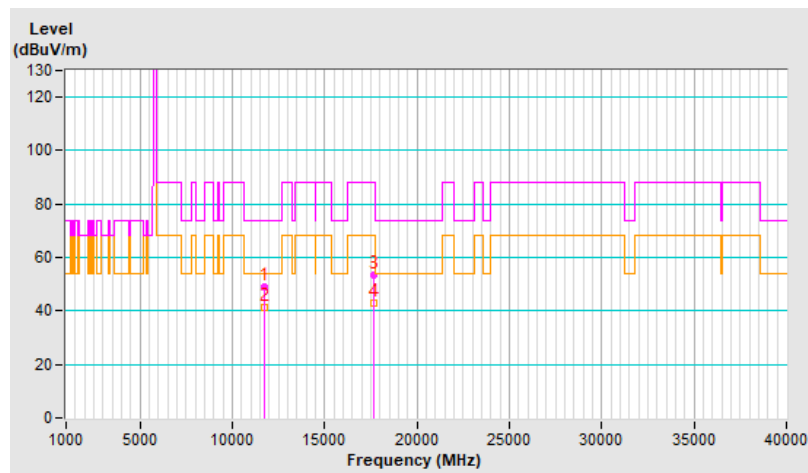


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	2.11 V	220	20.0	28.1
2	11770.00	40.2 AV	54.0	-13.8	2.11 V	220	12.1	28.1
3	#17655.00	53.6 PK	88.2	-34.6	1.33 V	40	18.0	35.6
4	#17655.00	43.0 AV	68.2	-25.2	1.33 V	40	7.4	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

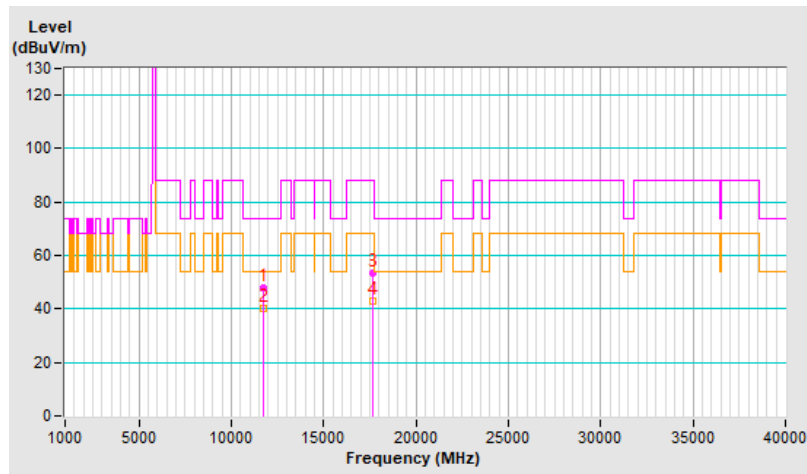


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.2 PK	74.0	-24.8	3.08 H	70	20.8	28.4
2	11690.00	41.1 AV	54.0	-12.9	3.08 H	70	12.7	28.4
3	#17535.00	53.1 PK	88.2	-35.1	1.44 H	192	18.6	34.5
4	#17535.00	43.0 AV	68.2	-25.2	1.44 H	192	8.5	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

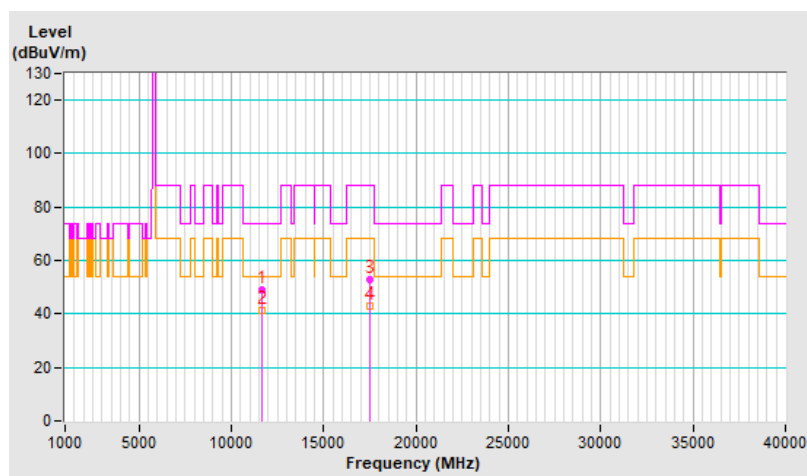


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	1.91 V	246	20.2	28.4
2	11690.00	41.0 AV	54.0	-13.0	1.91 V	246	12.6	28.4
3	#17535.00	53.0 PK	88.2	-35.2	1.50 V	62	18.5	34.5
4	#17535.00	42.8 AV	68.2	-25.4	1.50 V	62	8.3	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

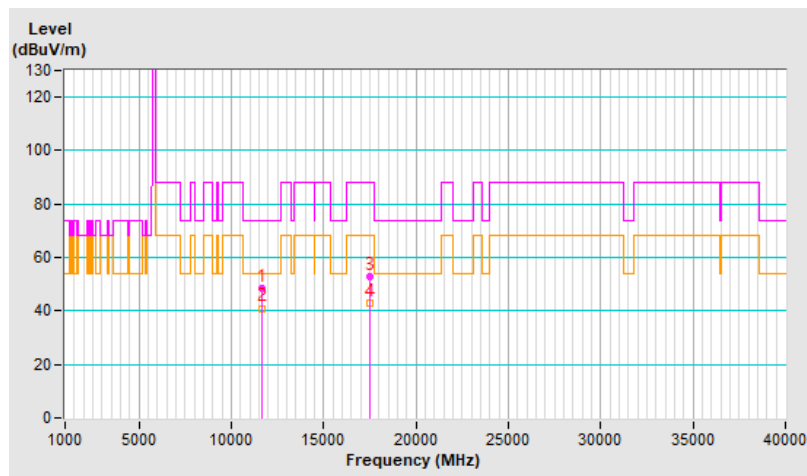


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.06 H	76	20.7	28.2
2	11730.00	40.6 AV	54.0	-13.4	3.06 H	76	12.4	28.2
3	#17595.00	52.9 PK	88.2	-35.3	1.47 H	194	17.9	35.0
4	#17595.00	42.8 AV	68.2	-25.4	1.47 H	194	7.8	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

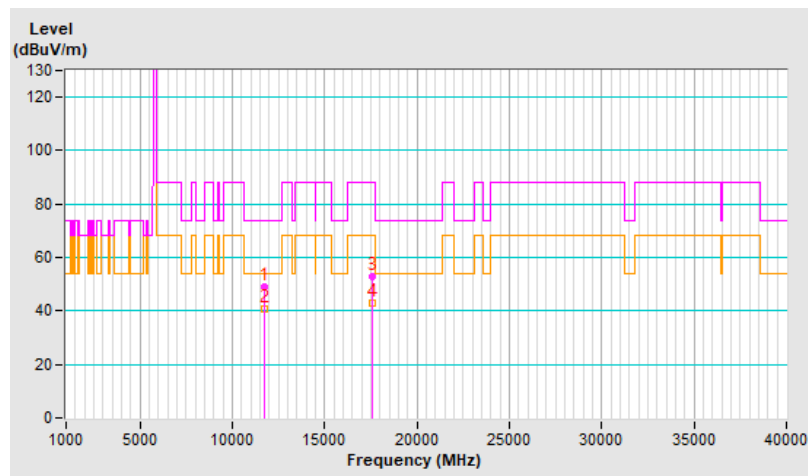


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.5 PK	74.0	-25.5	1.96 V	260	20.3	28.2
2	11730.00	41.1 AV	54.0	-12.9	1.96 V	260	12.9	28.2
3	#17595.00	53.0 PK	88.2	-35.2	1.53 V	61	18.0	35.0
4	#17595.00	42.6 AV	68.2	-25.6	1.53 V	61	7.6	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

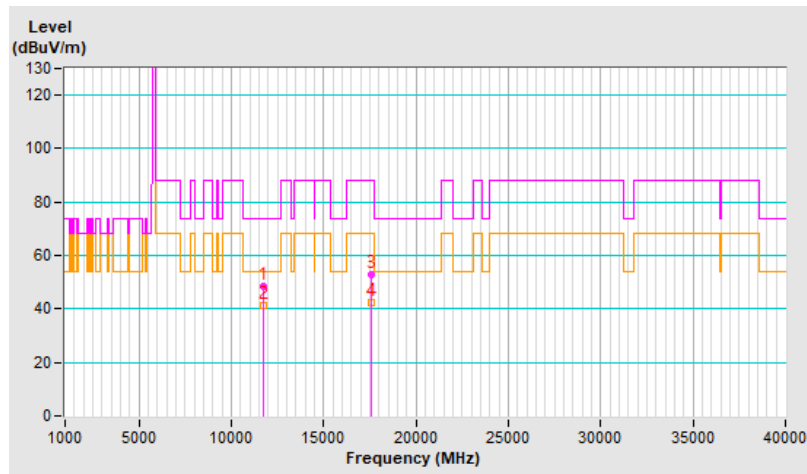


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.6 PK	74.0	-24.4	3.05 H	65	21.5	28.1
2	11770.00	41.4 AV	54.0	-12.6	3.05 H	65	13.3	28.1
3	#17655.00	53.0 PK	88.2	-35.2	1.39 H	184	17.4	35.6
4	#17655.00	42.6 AV	68.2	-25.6	1.39 H	184	7.0	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

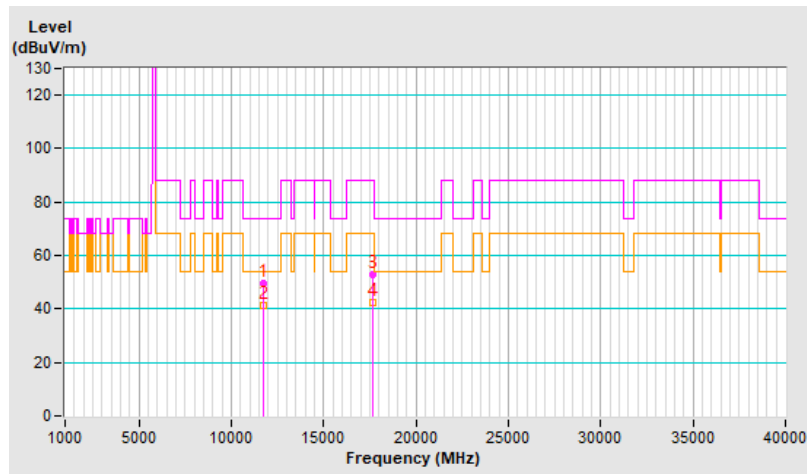


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.4 PK	74.0	-25.6	1.85 V	236	20.3	28.1
2	11770.00	40.5 AV	54.0	-13.5	1.85 V	236	12.4	28.1
3	#17655.00	53.3 PK	88.2	-34.9	1.48 V	70	17.7	35.6
4	#17655.00	42.9 AV	68.2	-25.3	1.48 V	70	7.3	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

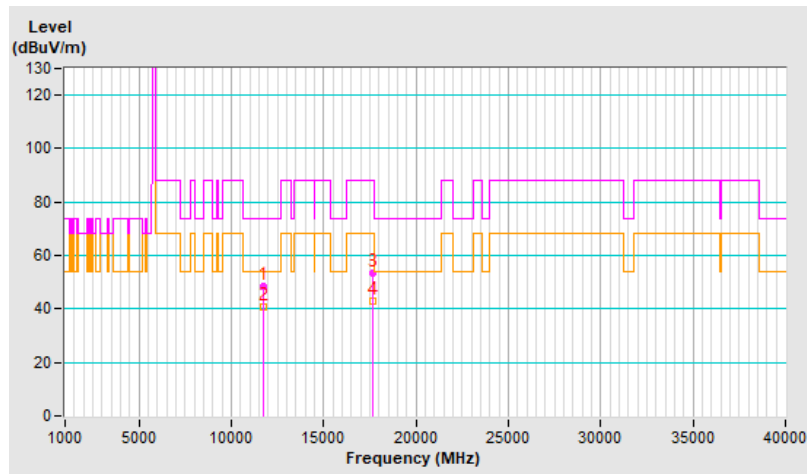


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.03 H	32	20.1	28.4
2	11690.00	40.0 AV	54.0	-14.0	3.03 H	32	11.6	28.4
3	#17535.00	53.6 PK	88.2	-34.6	1.38 H	224	19.1	34.5
4	#17535.00	43.4 AV	68.2	-24.8	1.38 H	224	8.9	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

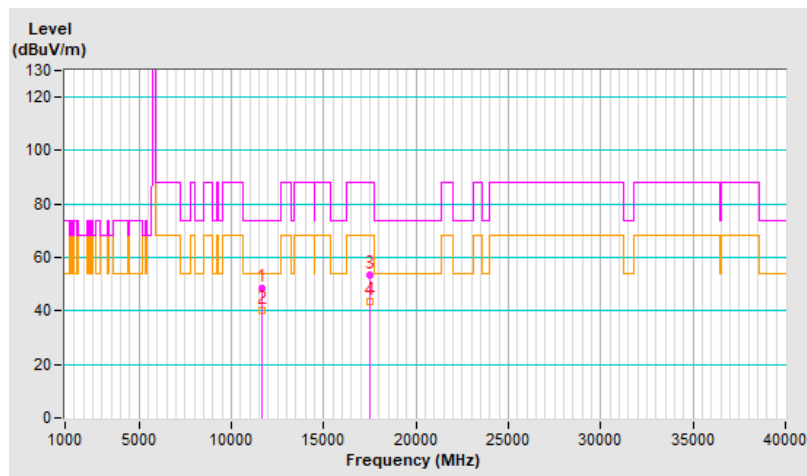


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.0 PK	74.0	-26.0	1.82 V	242	19.6	28.4
2	11690.00	40.2 AV	54.0	-13.8	1.82 V	242	11.8	28.4
3	#17535.00	53.8 PK	88.2	-34.4	1.39 V	79	19.3	34.5
4	#17535.00	43.1 AV	68.2	-25.1	1.39 V	79	8.6	34.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

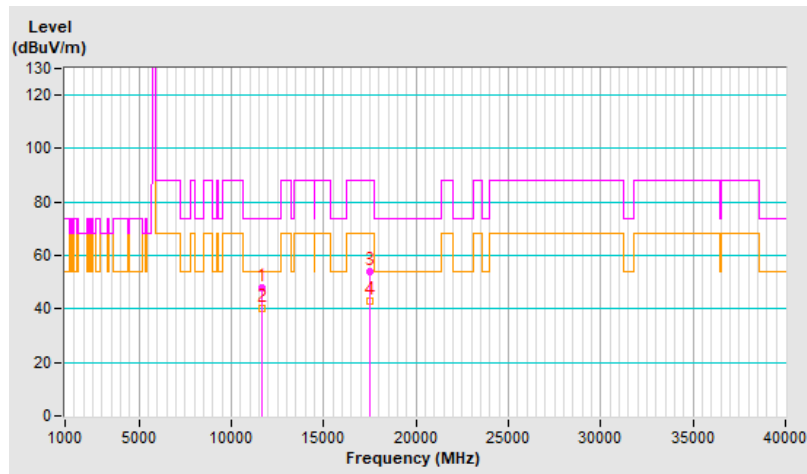


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.06 H	33	20.7	28.2
2	11730.00	40.4 AV	54.0	-13.6	3.06 H	33	12.2	28.2
3	#17595.00	53.5 PK	88.2	-34.7	1.42 H	232	18.5	35.0
4	#17595.00	43.3 AV	68.2	-24.9	1.42 H	232	8.3	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

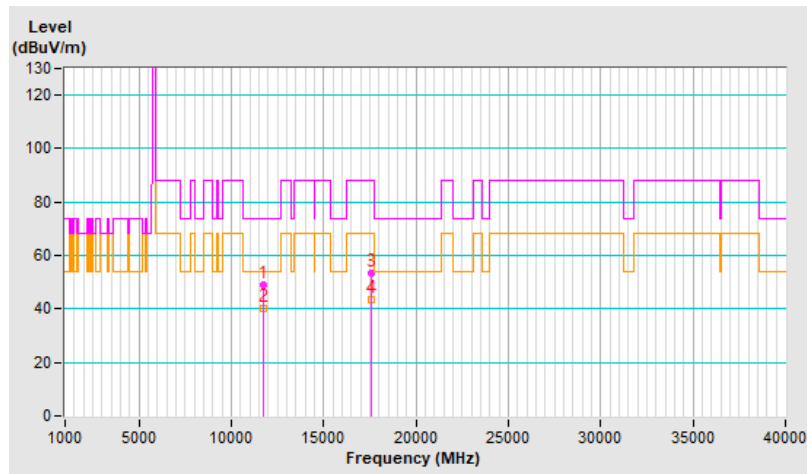


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.3 PK	74.0	-25.7	1.94 V	228	20.1	28.2
2	11730.00	40.4 AV	54.0	-13.6	1.94 V	228	12.2	28.2
3	#17595.00	53.6 PK	88.2	-34.6	1.41 V	60	18.6	35.0
4	#17595.00	42.8 AV	68.2	-25.4	1.41 V	60	7.8	35.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

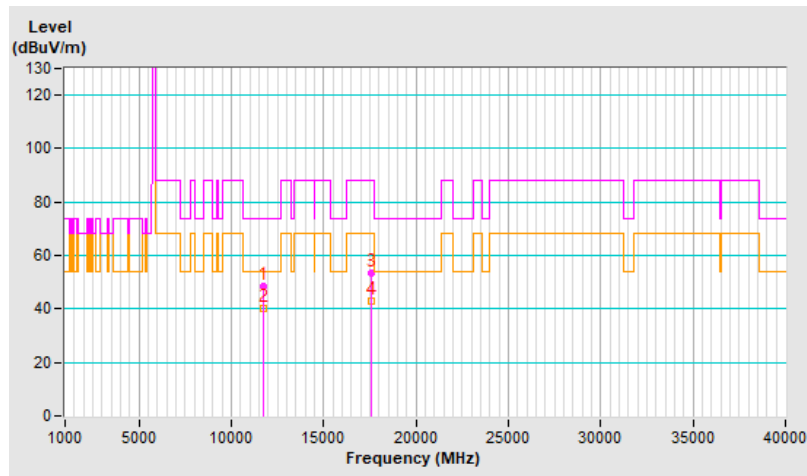


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	2.98 H	25	20.8	28.1
2	11770.00	40.1 AV	54.0	-13.9	2.98 H	25	12.0	28.1
3	#17655.00	53.0 PK	88.2	-35.2	1.35 H	229	17.4	35.6
4	#17655.00	43.0 AV	68.2	-25.2	1.35 H	229	7.4	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

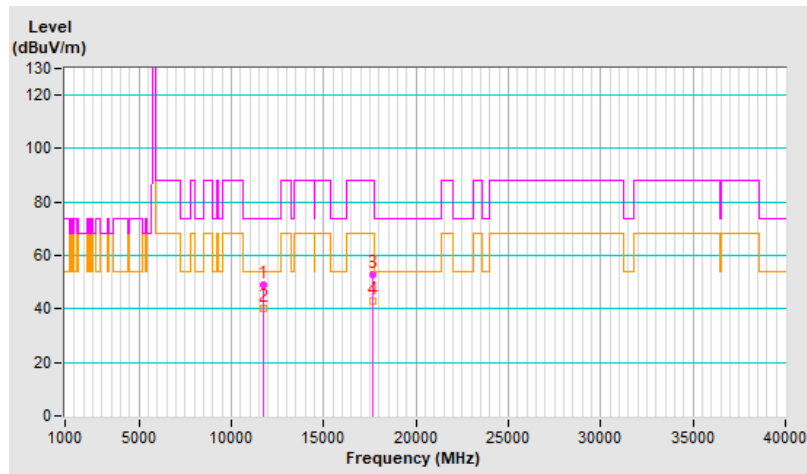


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	1.98 V	218	20.2	28.1
2	11770.00	40.3 AV	54.0	-13.7	1.98 V	218	12.2	28.1
3	#17655.00	53.7 PK	88.2	-34.5	1.44 V	66	18.1	35.6
4	#17655.00	42.6 AV	68.2	-25.6	1.44 V	66	7.0	35.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

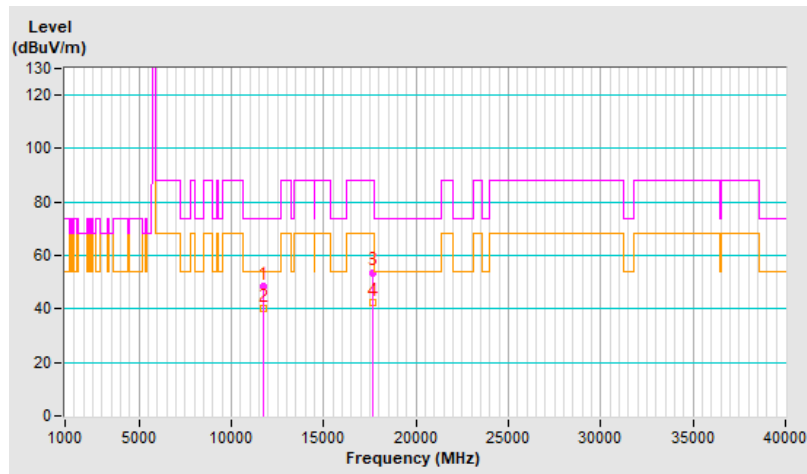


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	47.7 PK	74.0	-26.3	3.15 H	42	19.4	28.3
2	11710.00	40.1 AV	54.0	-13.9	3.15 H	42	11.8	28.3
3	#17565.00	52.7 PK	88.2	-35.5	1.29 H	201	18.0	34.7
4	#17565.00	43.0 AV	68.2	-25.2	1.29 H	201	8.3	34.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

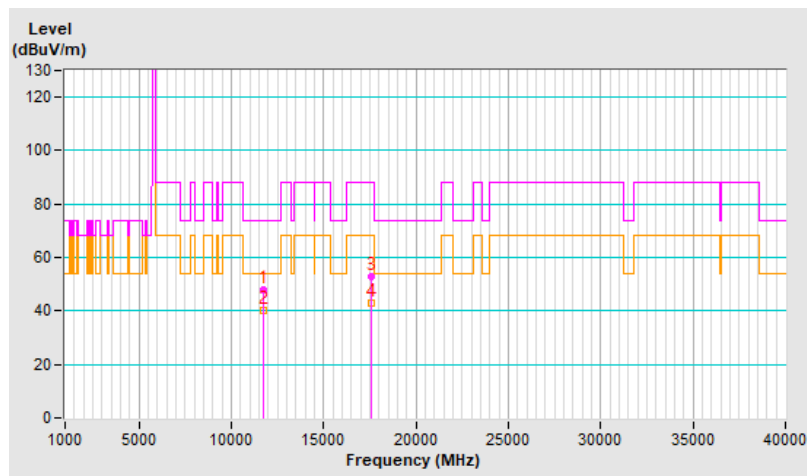


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	49.4 PK	74.0	-24.6	2.01 V	212	21.1	28.3
2	11710.00	41.5 AV	54.0	-12.5	2.01 V	212	13.2	28.3
3	#17565.00	54.0 PK	88.2	-34.2	1.37 V	46	19.3	34.7
4	#17565.00	43.2 AV	68.2	-25.0	1.37 V	46	8.5	34.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

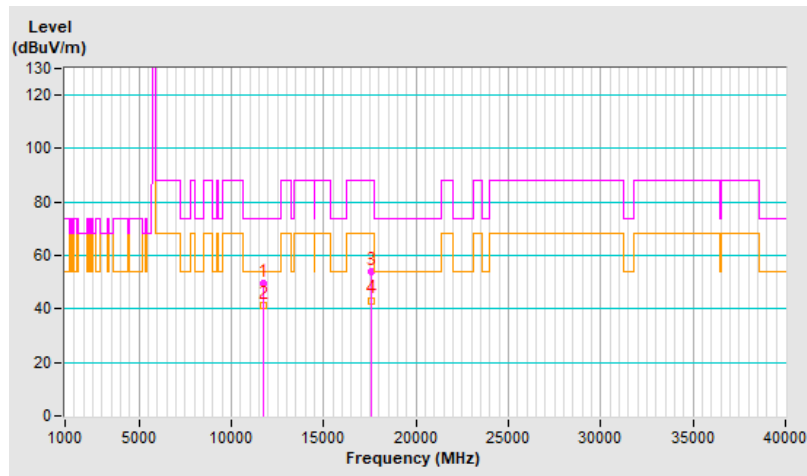


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.9 PK	74.0	-26.1	3.14 H	40	19.3	28.6
2	11630.00	40.6 AV	54.0	-13.4	3.14 H	40	12.0	28.6
3	#17445.00	52.7 PK	88.2	-35.5	1.26 H	216	18.9	33.8
4	#17445.00	43.2 AV	68.2	-25.0	1.26 H	216	9.4	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

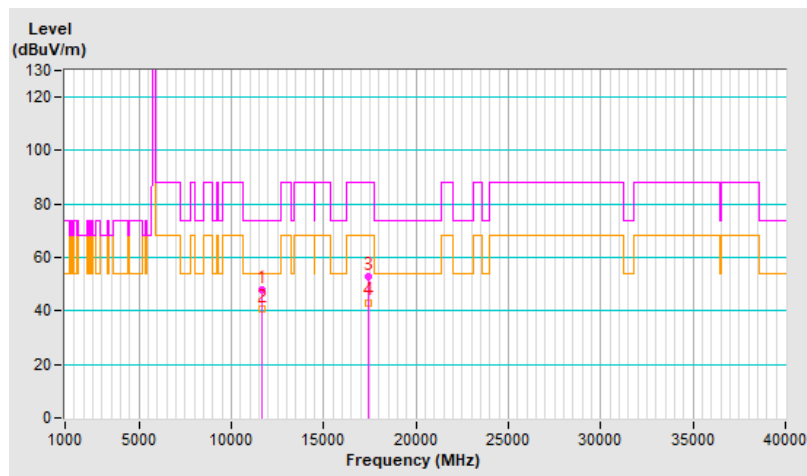


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.4 PK	74.0	-25.6	1.97 V	250	19.8	28.6
2	11630.00	40.5 AV	54.0	-13.5	1.97 V	250	11.9	28.6
3	#17445.00	53.4 PK	88.2	-34.8	1.44 V	64	19.6	33.8
4	#17445.00	43.2 AV	68.2	-25.0	1.44 V	64	9.4	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

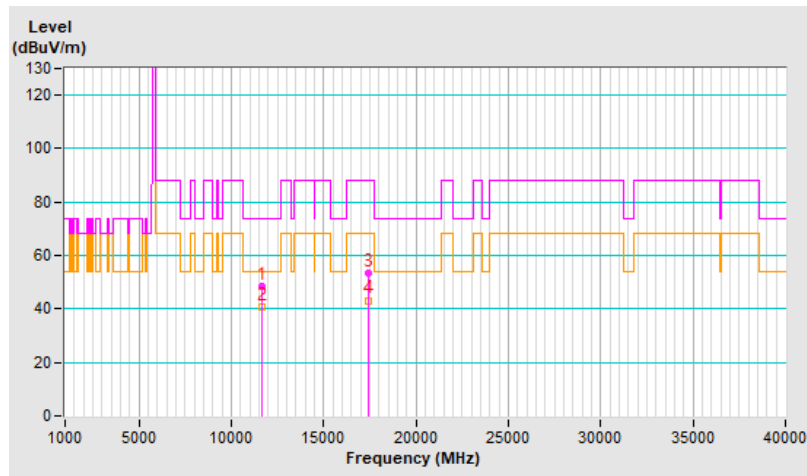


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	47.8 PK	74.0	-26.2	3.20 H	30	19.2	28.6
2	11630.00	40.4 AV	54.0	-13.6	3.20 H	30	11.8	28.6
3	#17445.00	52.5 PK	88.2	-35.7	1.23 H	192	18.7	33.8
4	#17445.00	43.0 AV	68.2	-25.2	1.23 H	192	9.2	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

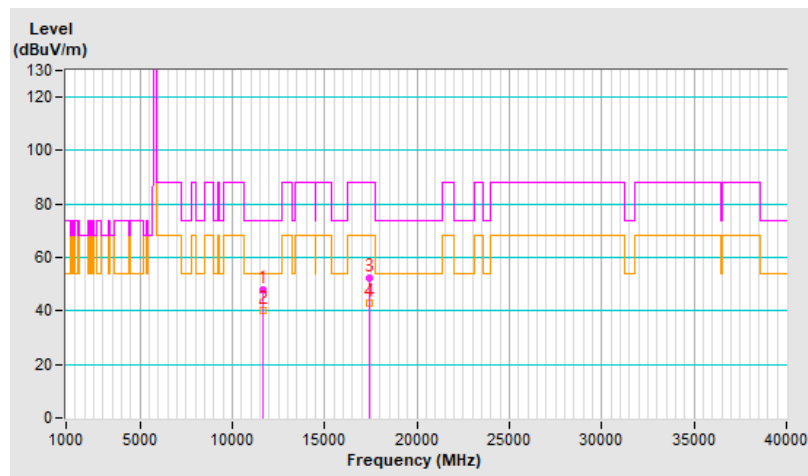


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 60% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	50.9 PK	74.0	-23.1	1.91 V	259	22.3	28.6
2	11630.00	40.9 AV	54.0	-13.1	1.91 V	259	12.3	28.6
3	#17445.00	52.4 PK	88.2	-35.8	1.53 V	31	18.6	33.8
4	#17445.00	42.1 AV	68.2	-26.1	1.53 V	31	8.3	33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

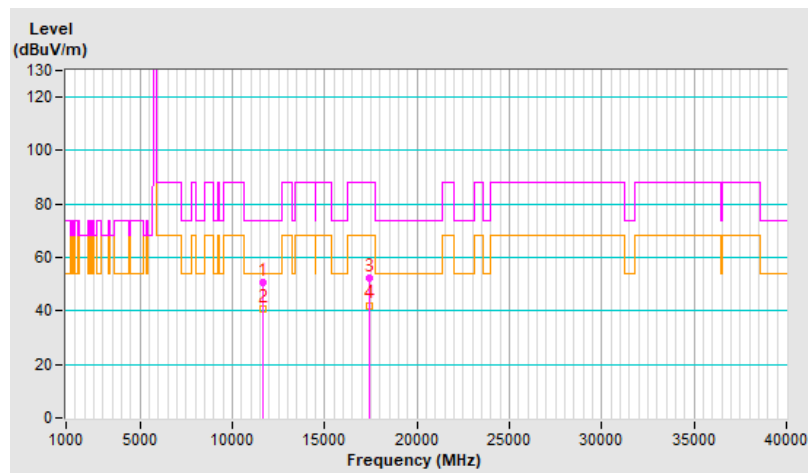

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---