




BUREAU
VERITAS



BUREAU
VERITAS

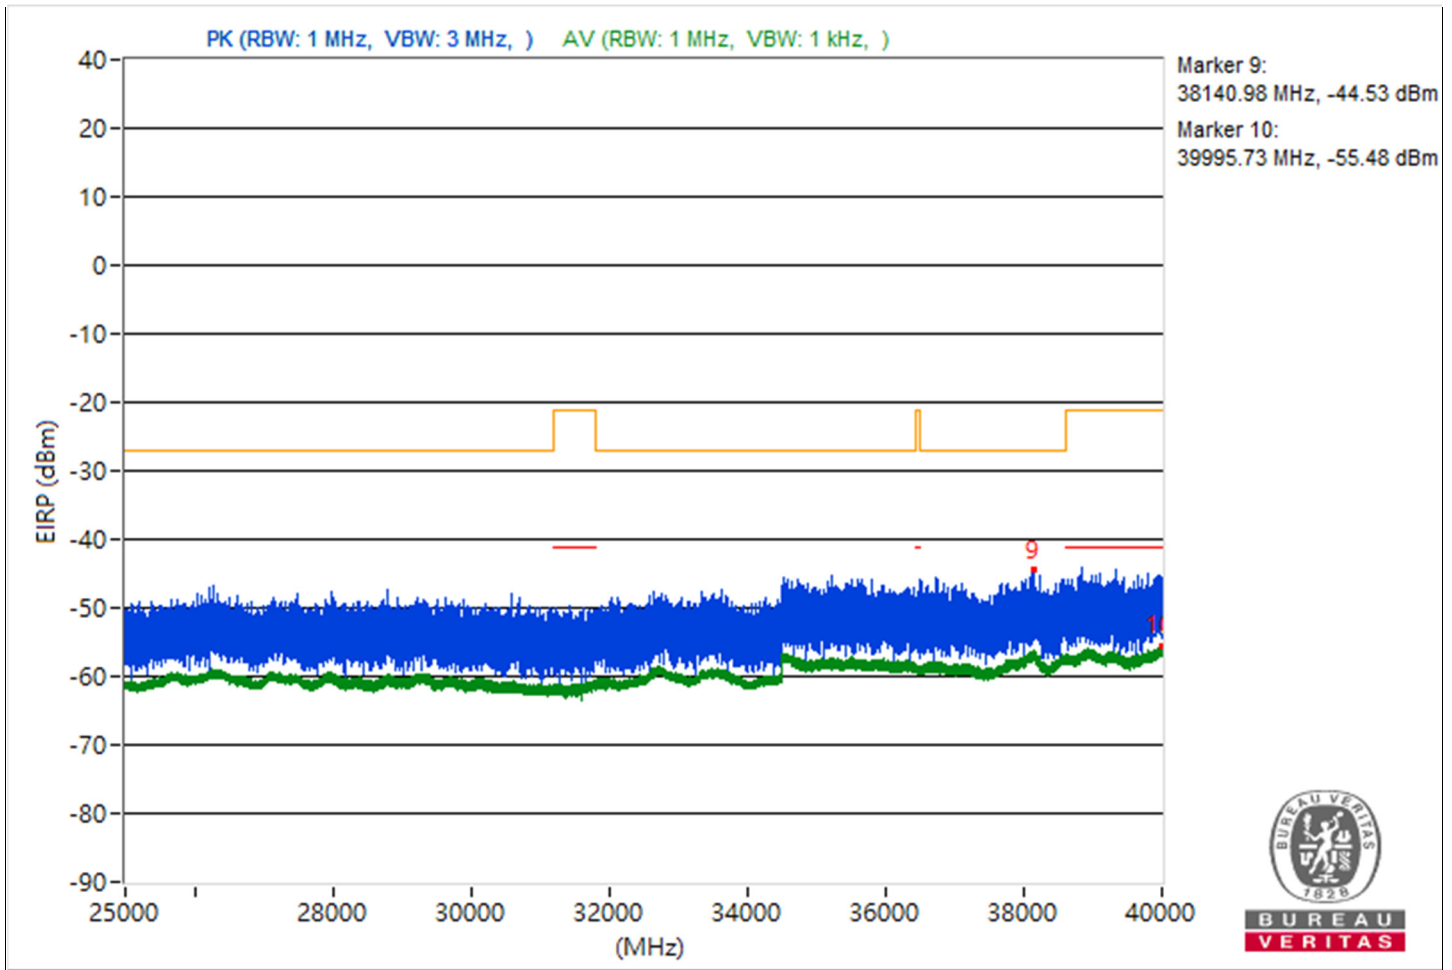


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		


Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4464.92	52.89 PK	68.26	-15.37	-47.29	4.92	-42.37
2	3838.66	44.6 AV	54	-9.4	-55.58	4.92	-50.66
3	#6451.37	54.55 PK	68.26	-13.71	-45.63	4.92	-40.71
4	11494.76	41.55 AV	54	-12.45	-58.63	4.92	-53.71
5	#14639.38	54.92 PK	68.26	-13.34	-45.26	4.92	-40.34
6	18701.8	43.46 AV	54	-10.54	-56.72	4.92	-51.8
7	#24016.6	57.4 PK	68.26	-10.86	-42.78	4.92	-37.86
8	23942.7	45.75 AV	54	-8.25	-54.43	4.92	-49.51
9	#34511.11	51.54 PK	68.26	-16.72	-48.64	4.92	-43.72
10	39993.42	39.81 AV	54	-14.19	-60.37	4.92	-55.45

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

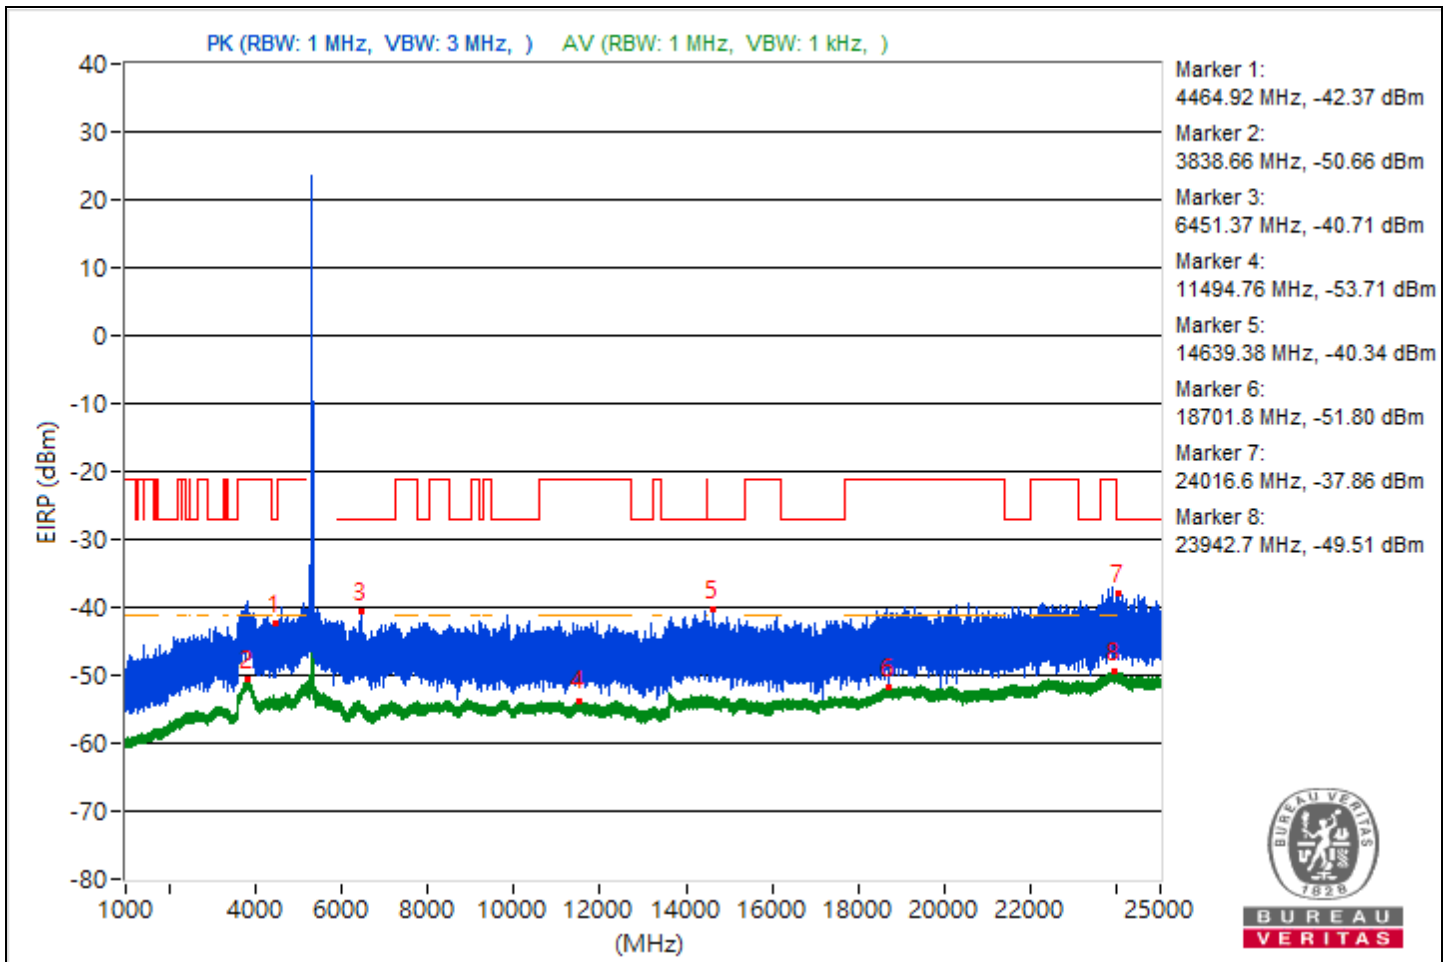

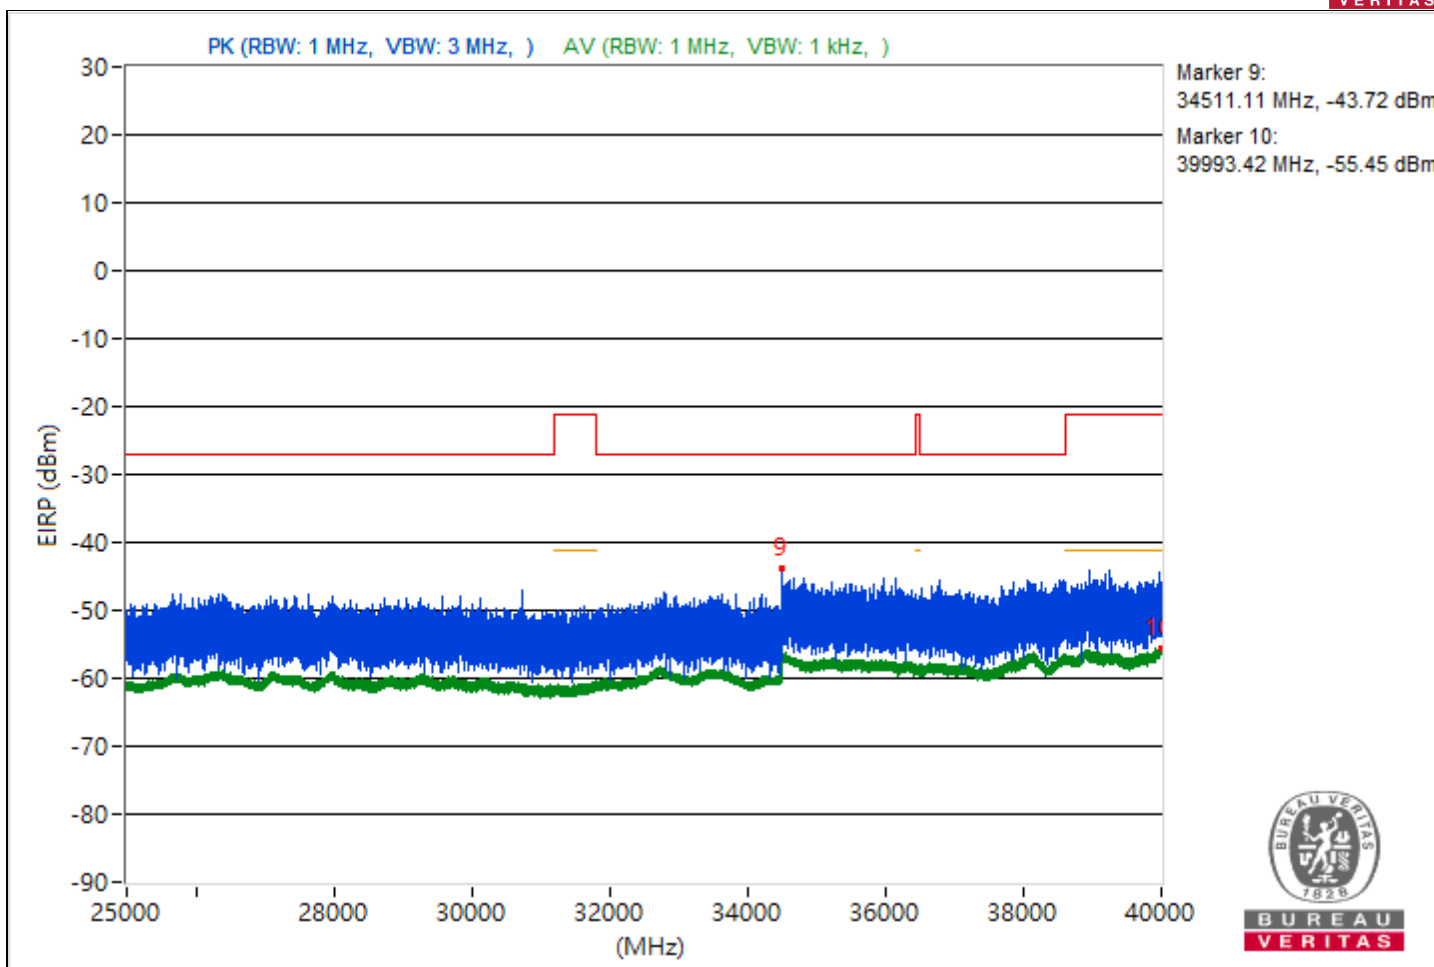



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.1	53.46 PK	68.26	-14.8	-46.72	4.92	-41.8
2	3839.59	44.51 AV	54	-9.49	-55.67	4.92	-50.75
3	#6390.7	53.85 PK	68.26	-14.41	-46.33	4.92	-41.41
4	11080.8	41.5 AV	54	-12.5	-58.68	4.92	-53.76
5	#13627.29	54.71 PK	68.26	-13.55	-45.47	4.92	-40.55
6	18818	43.33 AV	54	-10.67	-56.85	4.92	-51.93
7	#24310.6	57.32 PK	68.26	-10.94	-42.86	4.92	-37.94
8	23862.1	45.77 AV	54	-8.23	-54.41	4.92	-49.49
9	#38063.73	50.7 PK	68.26	-17.56	-49.48	4.92	-44.56
10	39998.31	39.84 AV	54	-14.16	-60.34	4.92	-55.42

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

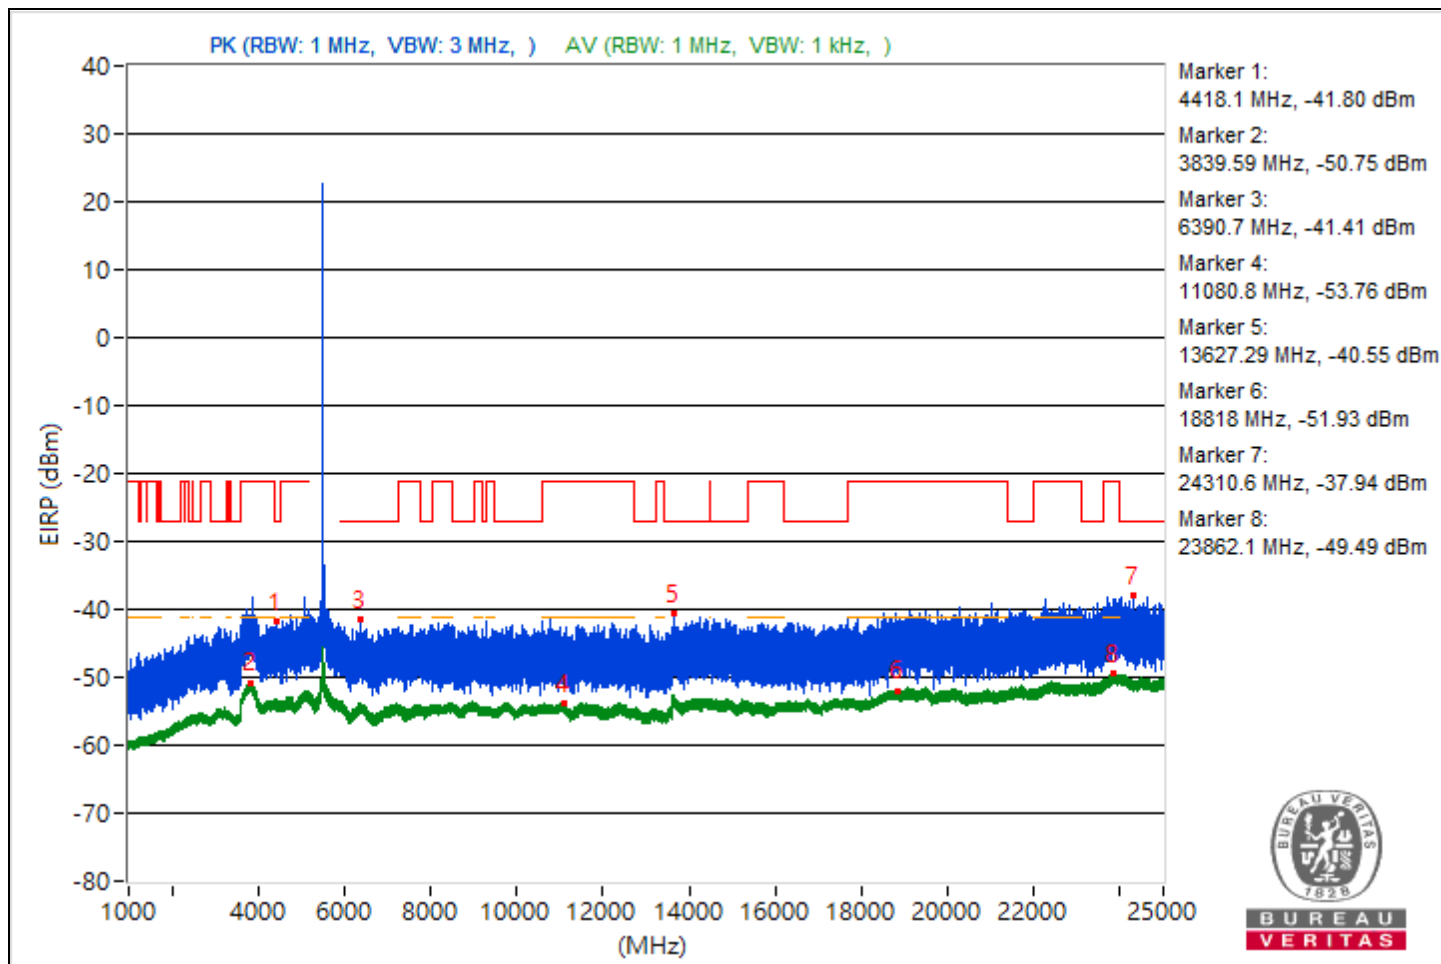

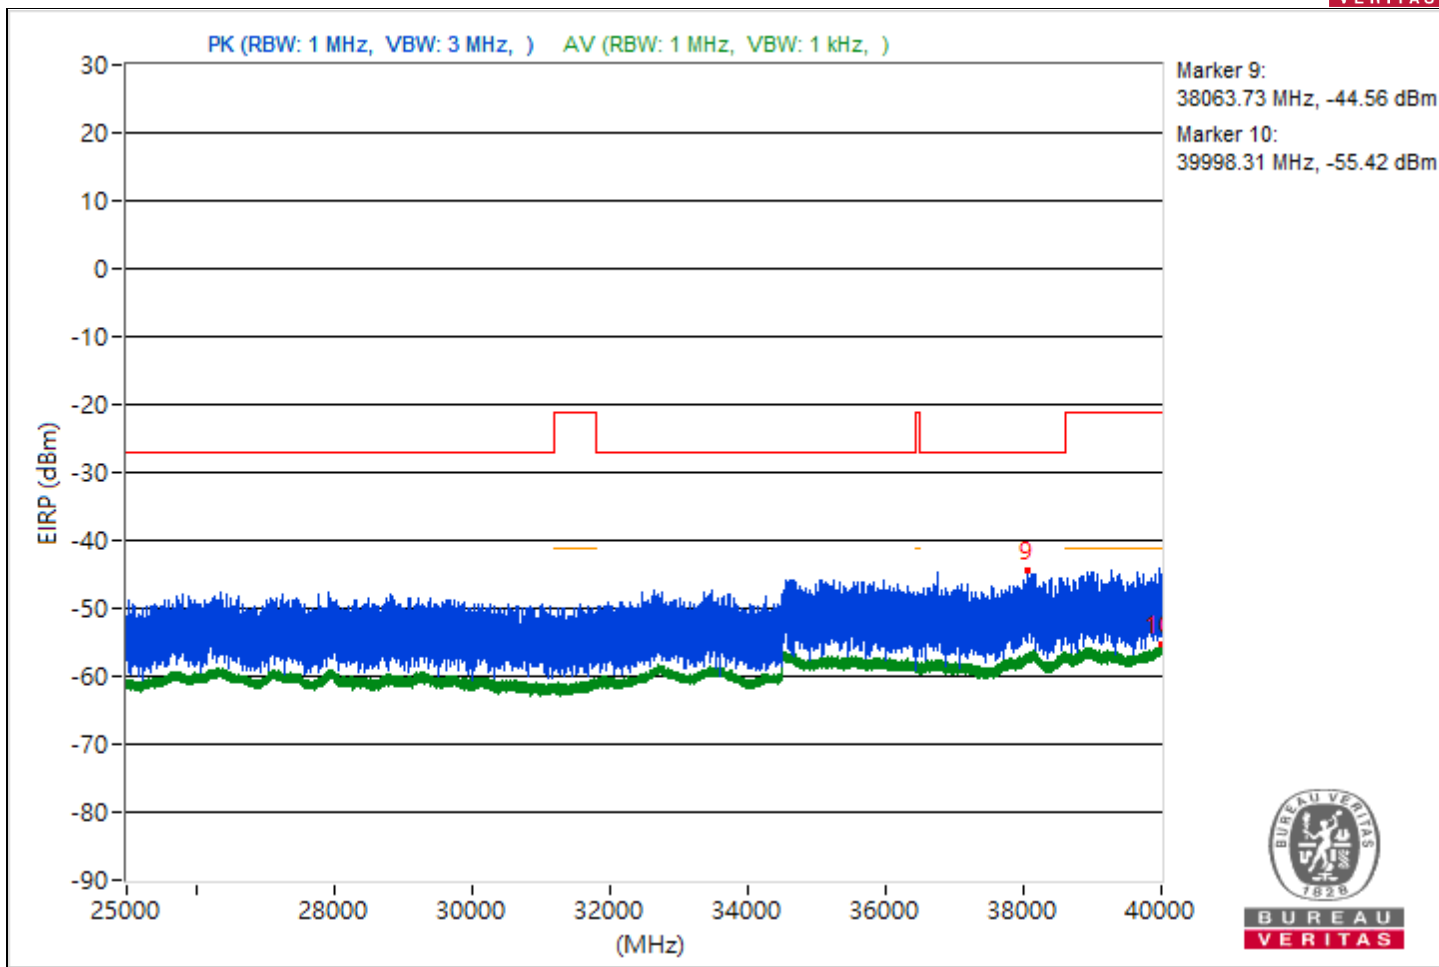



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4491.68	53.39 PK	68.26	-14.87	-46.79	4.92	-41.87
2	3819.68	44.49 AV	54	-9.51	-55.69	4.92	-50.77
3	#9788.44	54.52 PK	68.26	-13.74	-45.66	4.92	-40.74
4	8428.62	41.67 AV	54	-12.33	-58.51	4.92	-53.59
5	#14467.29	54.61 PK	68.26	-13.65	-45.57	4.92	-40.65
6	18994.9	43.37 AV	54	-10.63	-56.81	4.92	-51.89
7	#24636	57.02 PK	68.26	-11.24	-43.16	4.92	-38.24
8	23866.5	45.94 AV	54	-8.06	-54.24	4.92	-49.32
9	#38239.82	51.25 PK	68.26	-17.01	-48.93	4.92	-44.01
10	39995.91	39.84 AV	54	-14.16	-60.34	4.92	-55.42

Notes:

- Margin value = Emission Level - Limit value
- "# ": The radiated frequency is out of the restricted band.

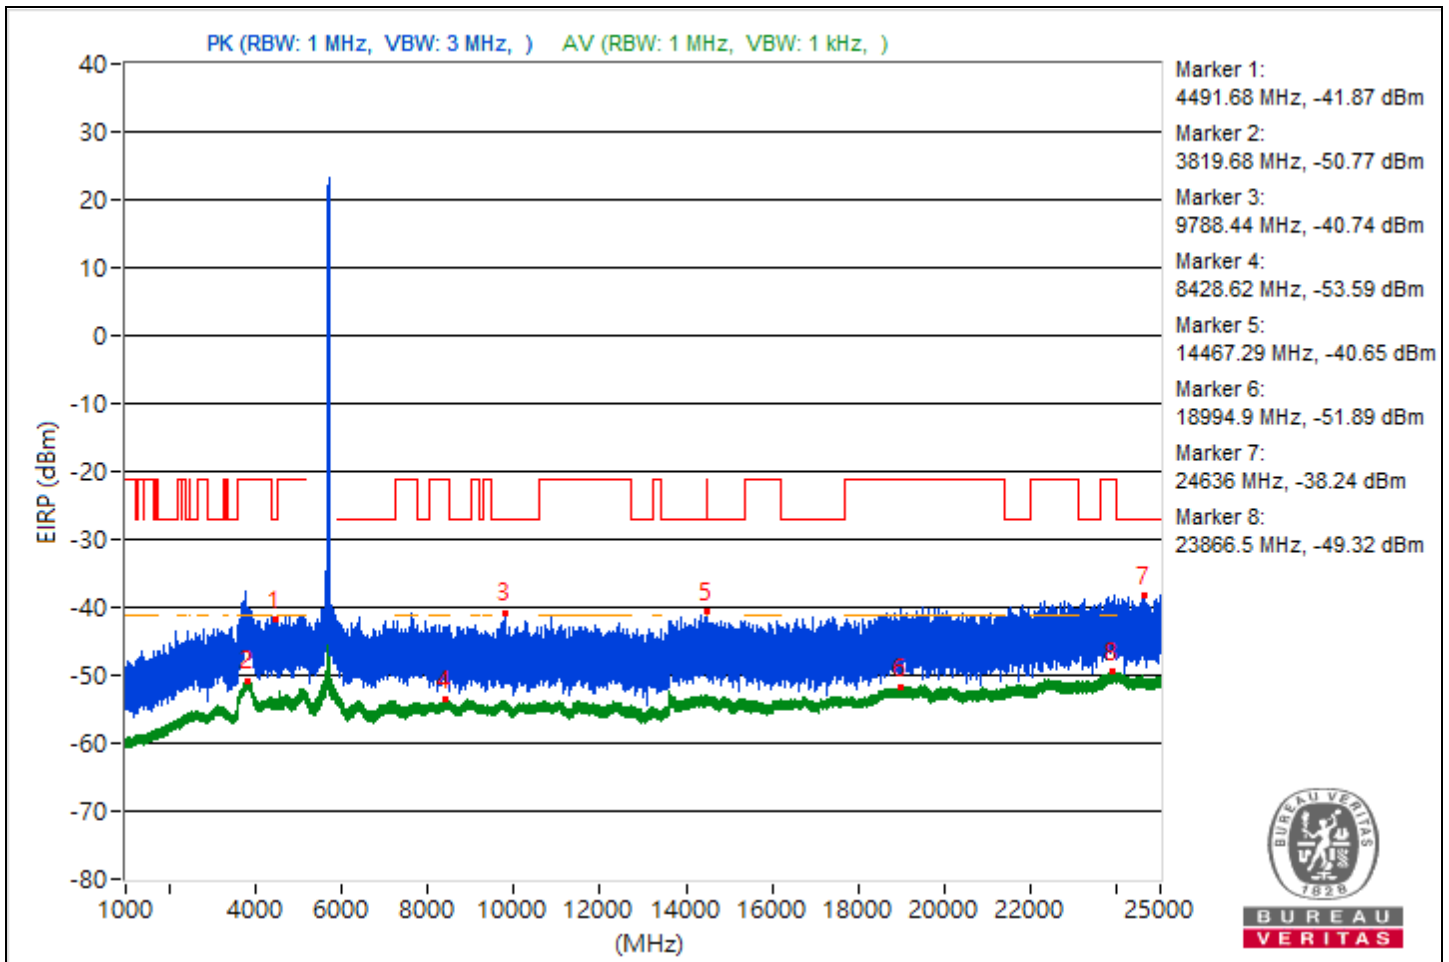

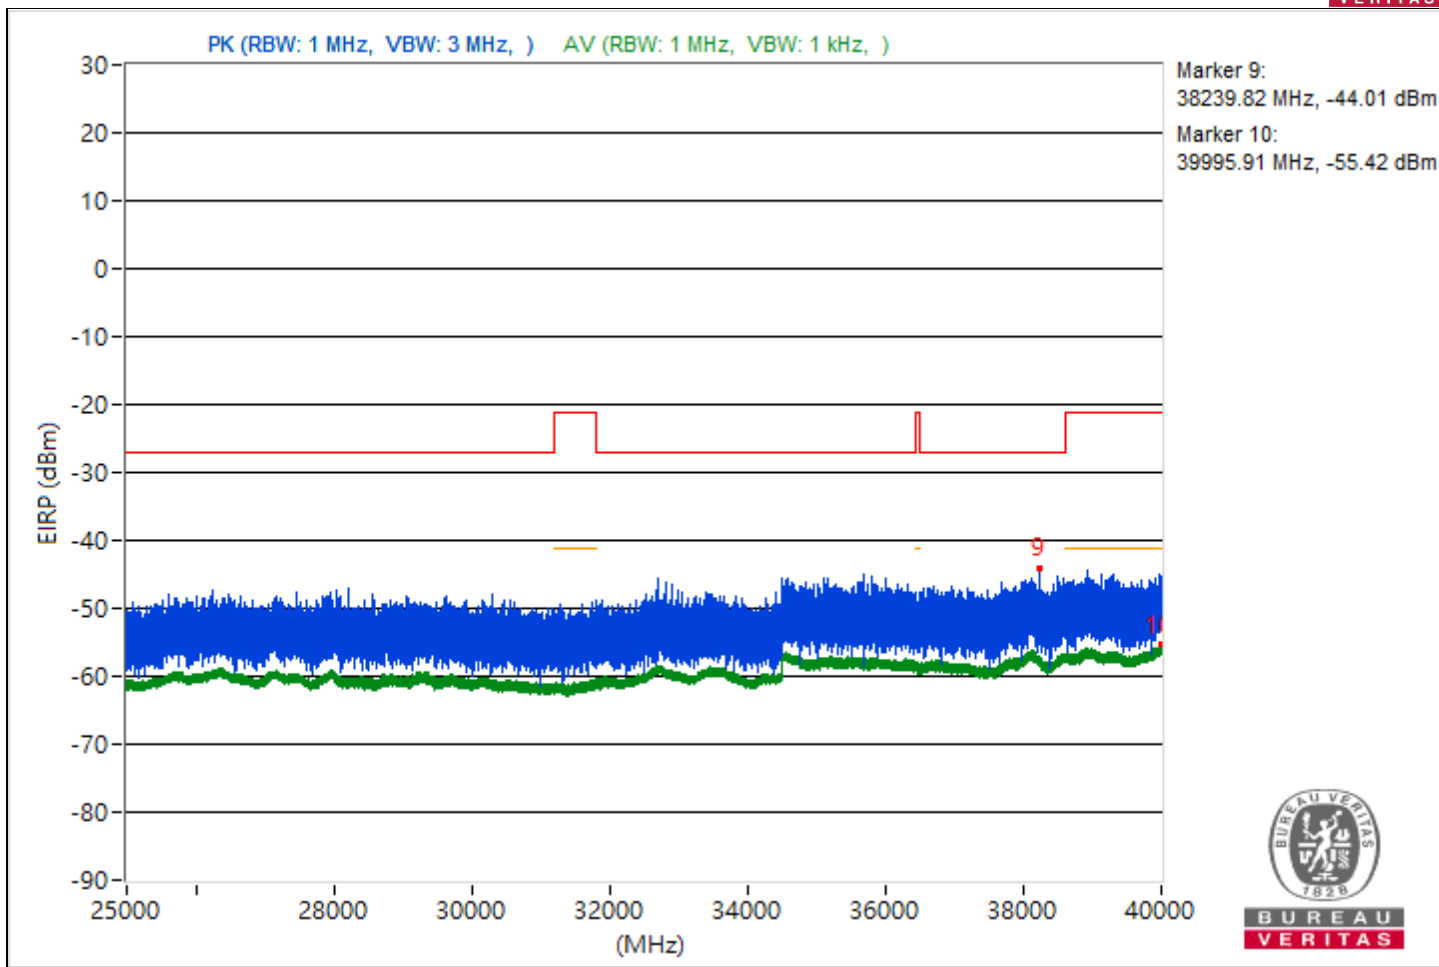



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4448.51	52.68 PK	68.26	-15.58	-47.5	4.92	-42.58
2	3808.01	44.6 AV	54	-9.4	-55.58	4.92	-50.66
3	#8541.69	53.61 PK	68.26	-14.65	-46.57	4.92	-41.65
4	8417.24	41.74 AV	54	-12.26	-58.44	4.92	-53.52
5	#14800.98	55.22 PK	68.26	-13.04	-44.96	4.92	-40.04
6	18670.3	43.35 AV	54	-10.65	-56.83	4.92	-51.91
7	#24605.4	57.84 PK	68.26	-10.42	-42.34	4.92	-37.42
8	23989.3	45.79 AV	54	-8.21	-54.39	4.92	-49.47
9	#34591.38	50.19 PK	68.26	-18.07	-49.99	4.92	-45.07
10	39962.93	39.72 AV	54	-14.28	-60.46	4.92	-55.54

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

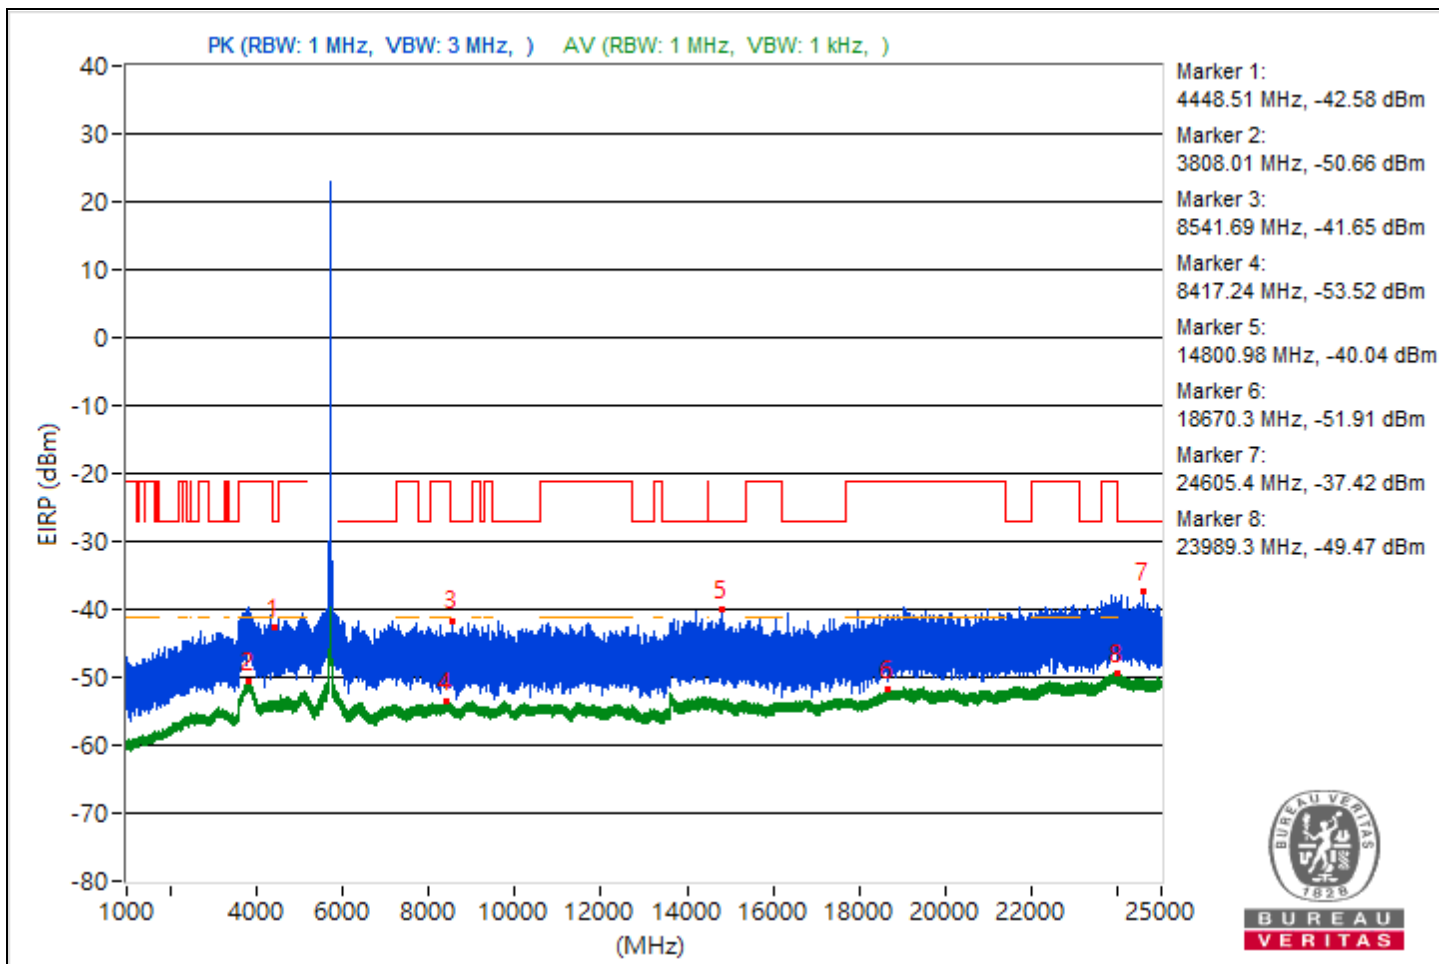

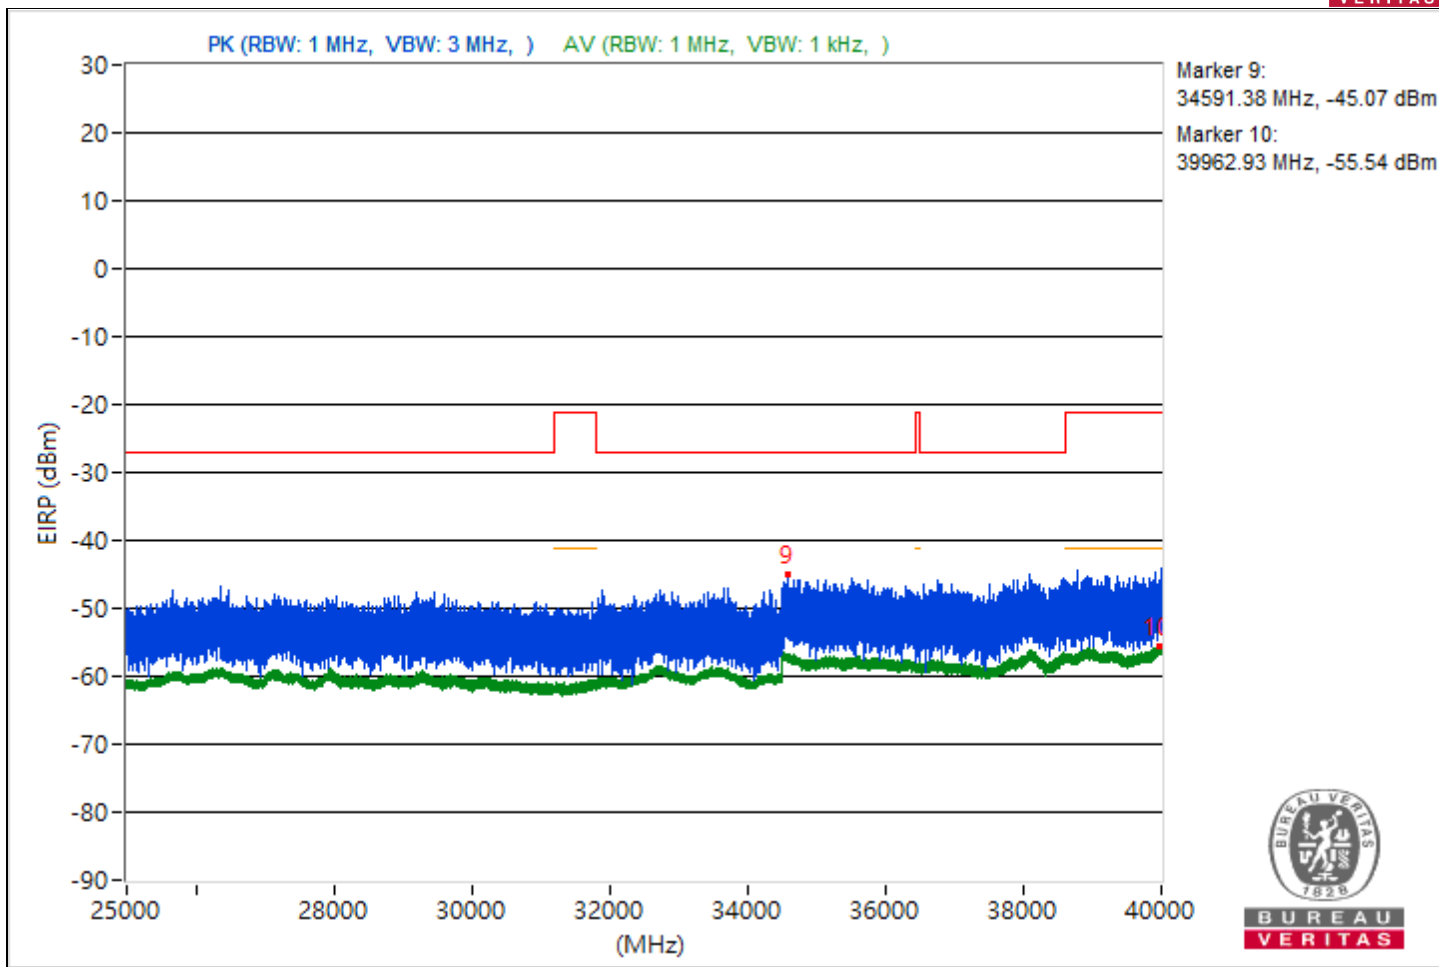



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4461.19	53.32 PK	68.26	-14.94	-46.86	4.92	-41.94
2	3829.01	44.57 AV	54	-9.43	-55.61	4.92	-50.69
3	#7225.64	53.66 PK	68.26	-14.6	-46.52	4.92	-41.6
4	10646.93	41.72 AV	54	-12.28	-58.46	4.92	-53.54
5	#14294.4	54.21 PK	68.26	-14.05	-45.97	4.92	-41.05
6	18762.2	43.46 AV	54	-10.54	-56.72	4.92	-51.8
7	#24954.8	57.37 PK	68.26	-10.89	-42.81	4.92	-37.89
8	23820.4	45.9 AV	54	-8.1	-54.28	4.92	-49.36
9	#34530.67	50.27 PK	68.26	-17.99	-49.91	4.92	-44.99
10	39998.76	39.87 AV	54	-14.13	-60.31	4.92	-55.39

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

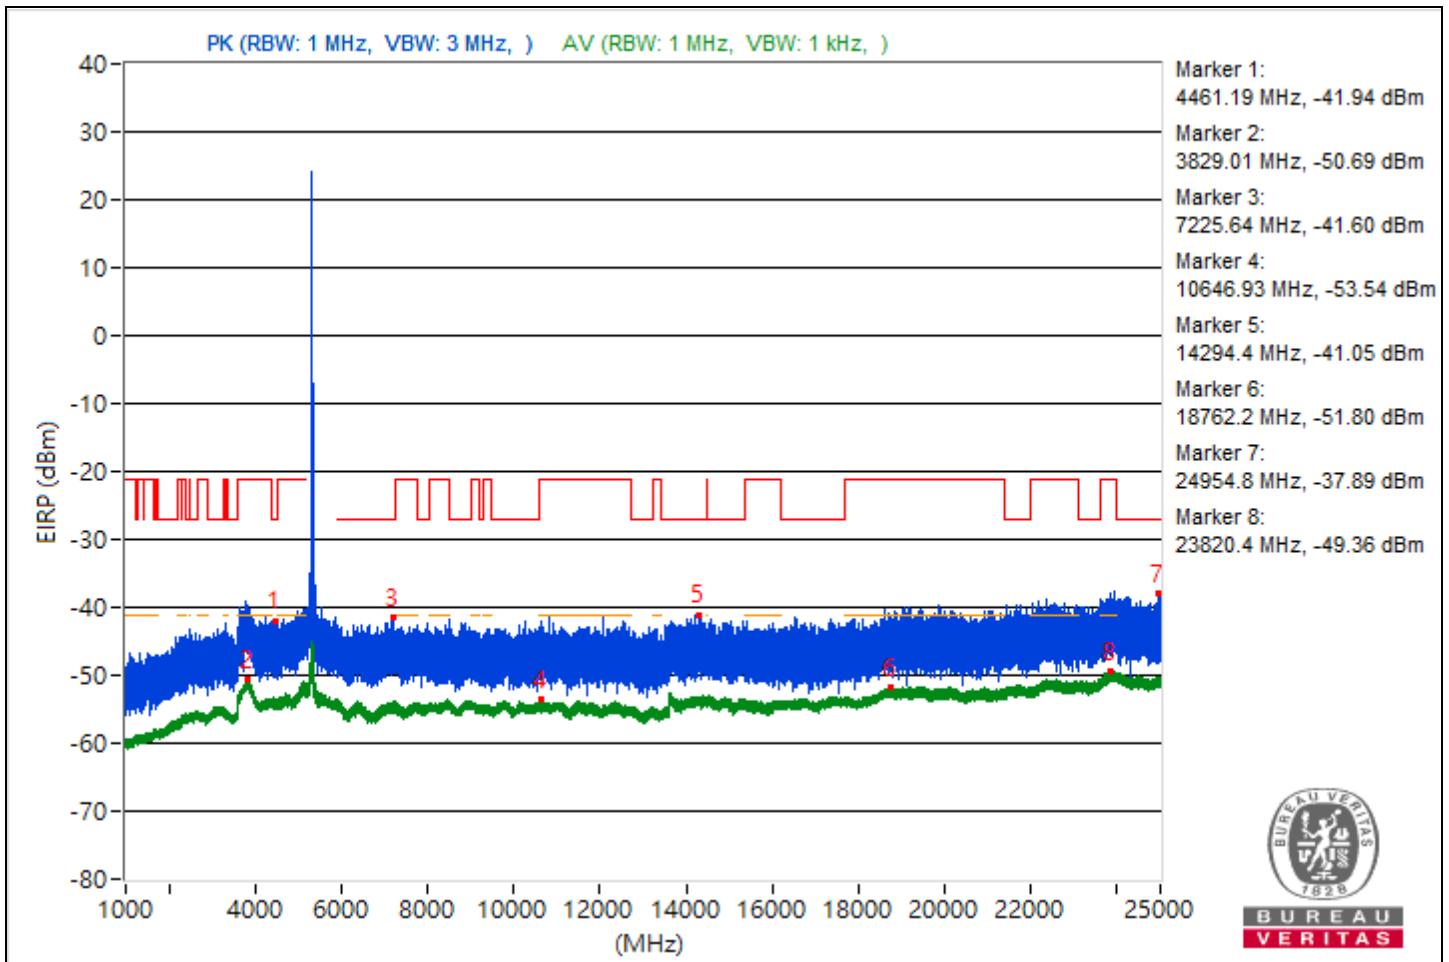

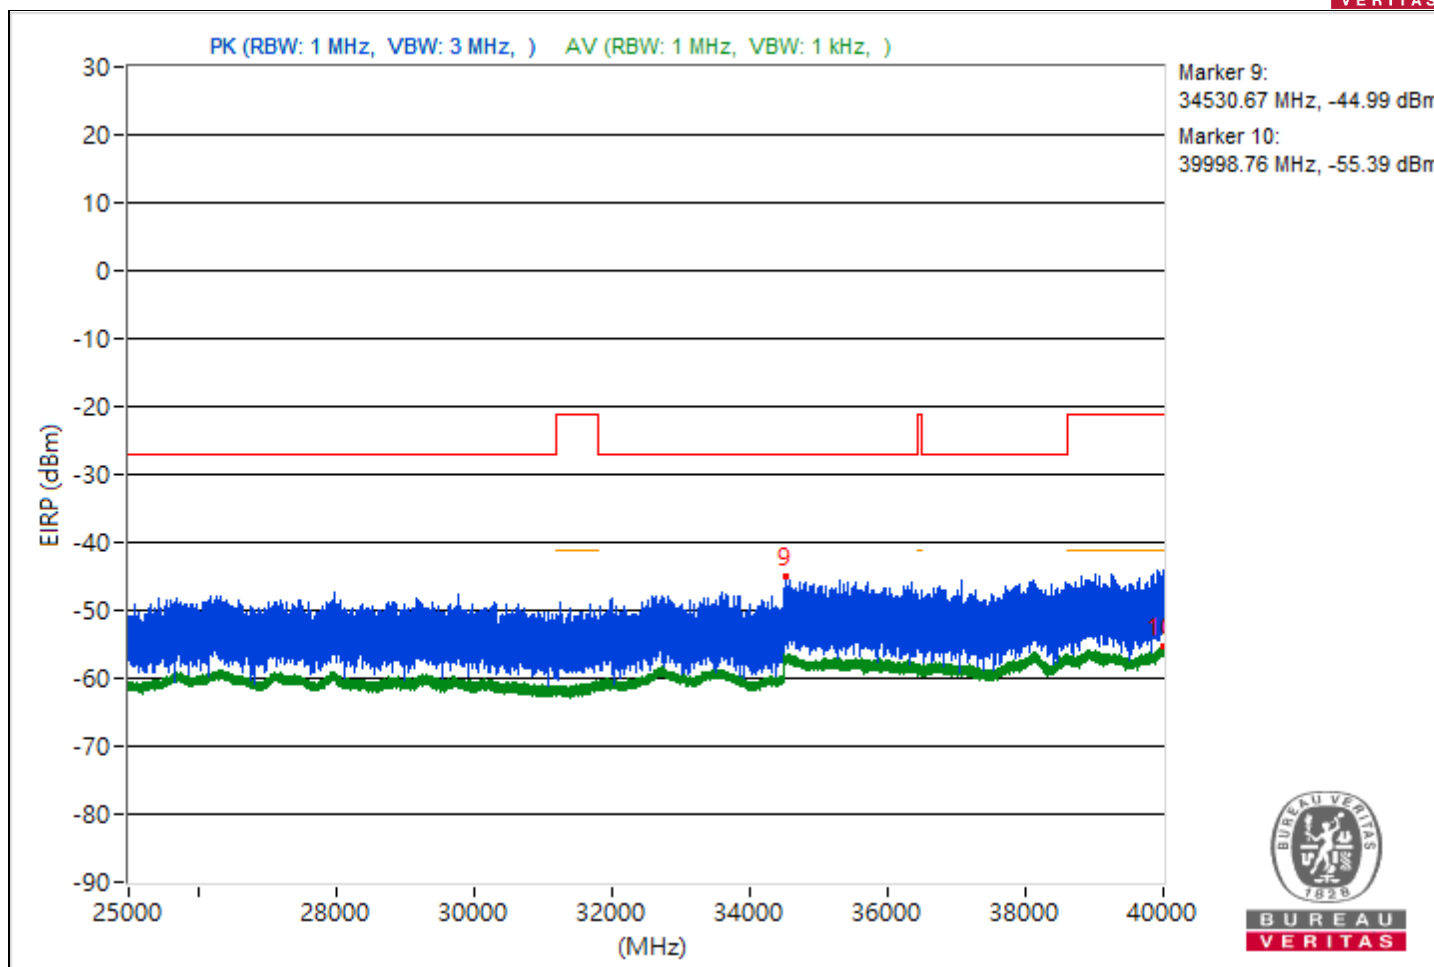



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4465.93	53.02 PK	68.26	-15.24	-47.16	4.92	-42.24
2	3829.17	44.45 AV	54	-9.55	-55.73	4.92	-50.81
3	#7803.14	53.3 PK	68.26	-14.96	-46.88	4.92	-41.96
4	10994.13	41.81 AV	54	-12.19	-58.37	4.92	-53.45
5	#14357.42	54.6 PK	68.26	-13.66	-45.58	4.92	-40.66
6	18750.2	43.44 AV	54	-10.56	-56.74	4.92	-51.82
7	#24841.6	56.67 PK	68.26	-11.59	-43.51	4.92	-38.59
8	23942.3	45.83 AV	54	-8.17	-54.35	4.92	-49.43
9	#34616.36	51.06 PK	68.26	-17.2	-49.12	4.92	-44.2
10	39986.76	39.84 AV	54	-14.16	-60.34	4.92	-55.42

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

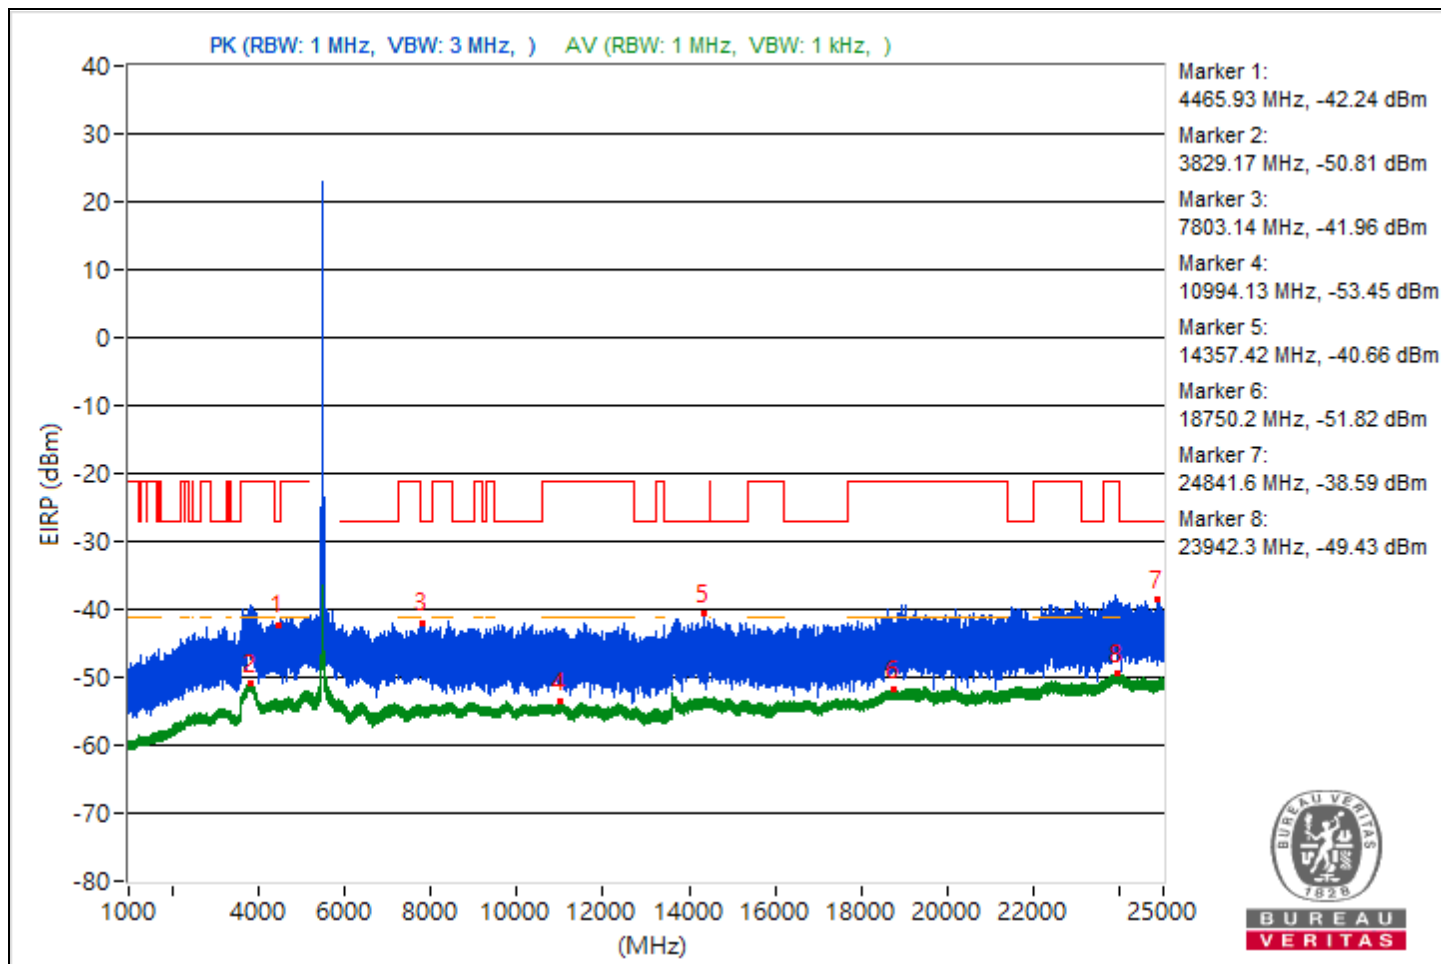

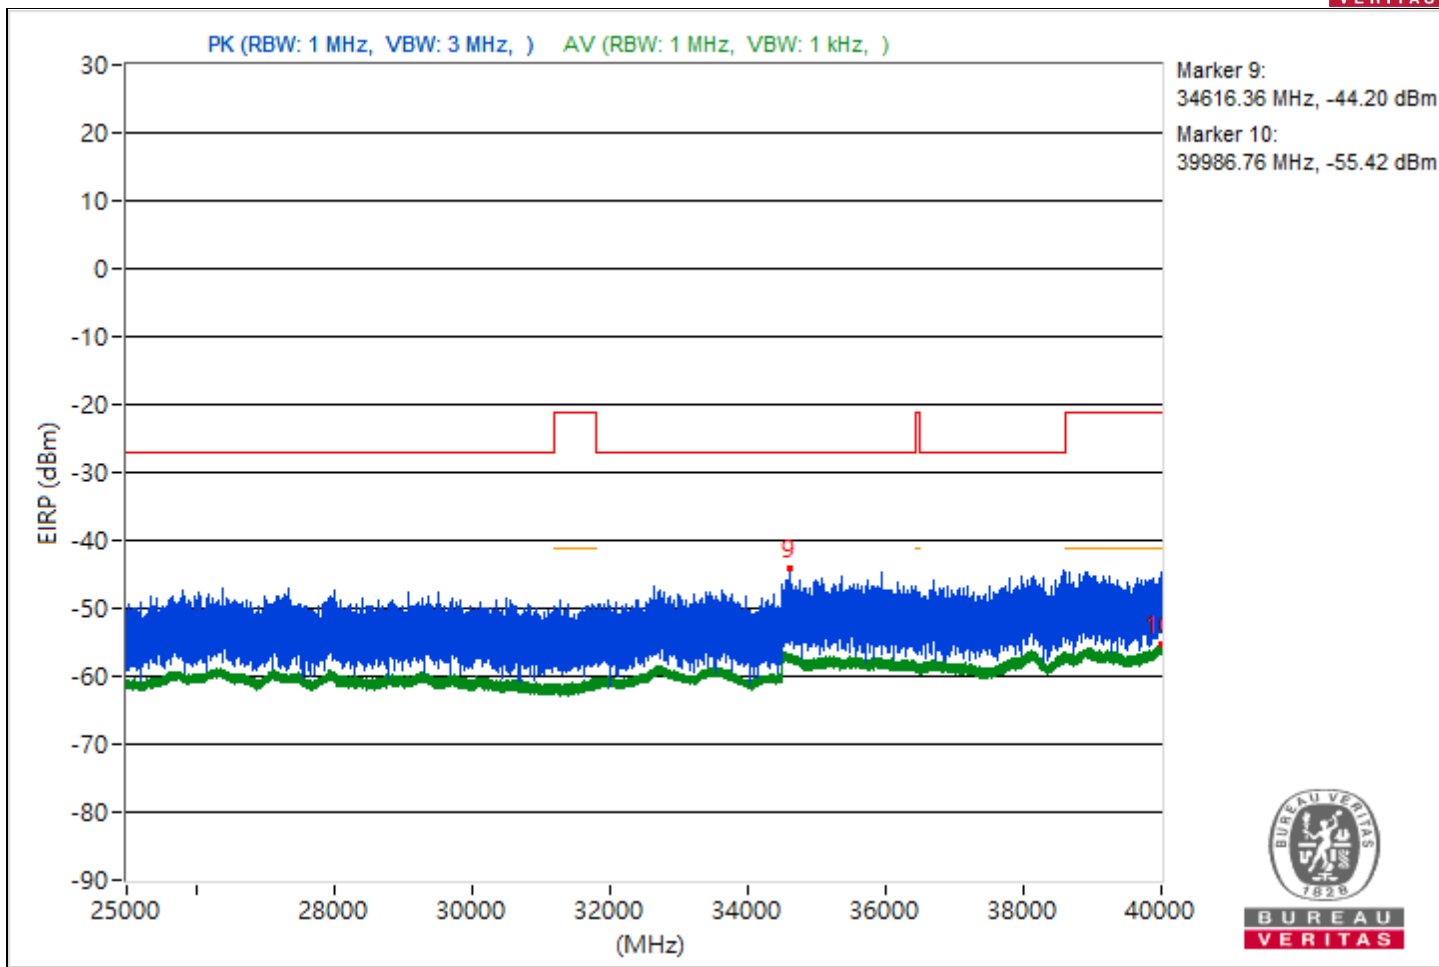




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		


Conducted Unwanted Emissions

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4436.3	52.87 PK	68.26	-15.39	-47.31	4.92	-42.39
2	3814.39	44.48 AV	54	-9.52	-55.7	4.92	-50.78
3	#9643.47	54.05 PK	68.26	-14.21	-46.13	4.92	-41.21
4	8409.16	41.52 AV	54	-12.48	-58.66	4.92	-53.74
5	#13688.44	53.84 PK	68.26	-14.42	-46.34	4.92	-41.42
6	18993.2	43.35 AV	54	-10.65	-56.83	4.92	-51.91
7	#24029.6	56.85 PK	68.26	-11.41	-43.33	4.92	-38.41
8	23853.9	45.92 AV	54	-8.08	-54.26	4.92	-49.34
9	#34707.47	50.33 PK	68.26	-17.93	-49.85	4.92	-44.93
10	39983.38	39.76 AV	54	-14.24	-60.42	4.92	-55.5

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

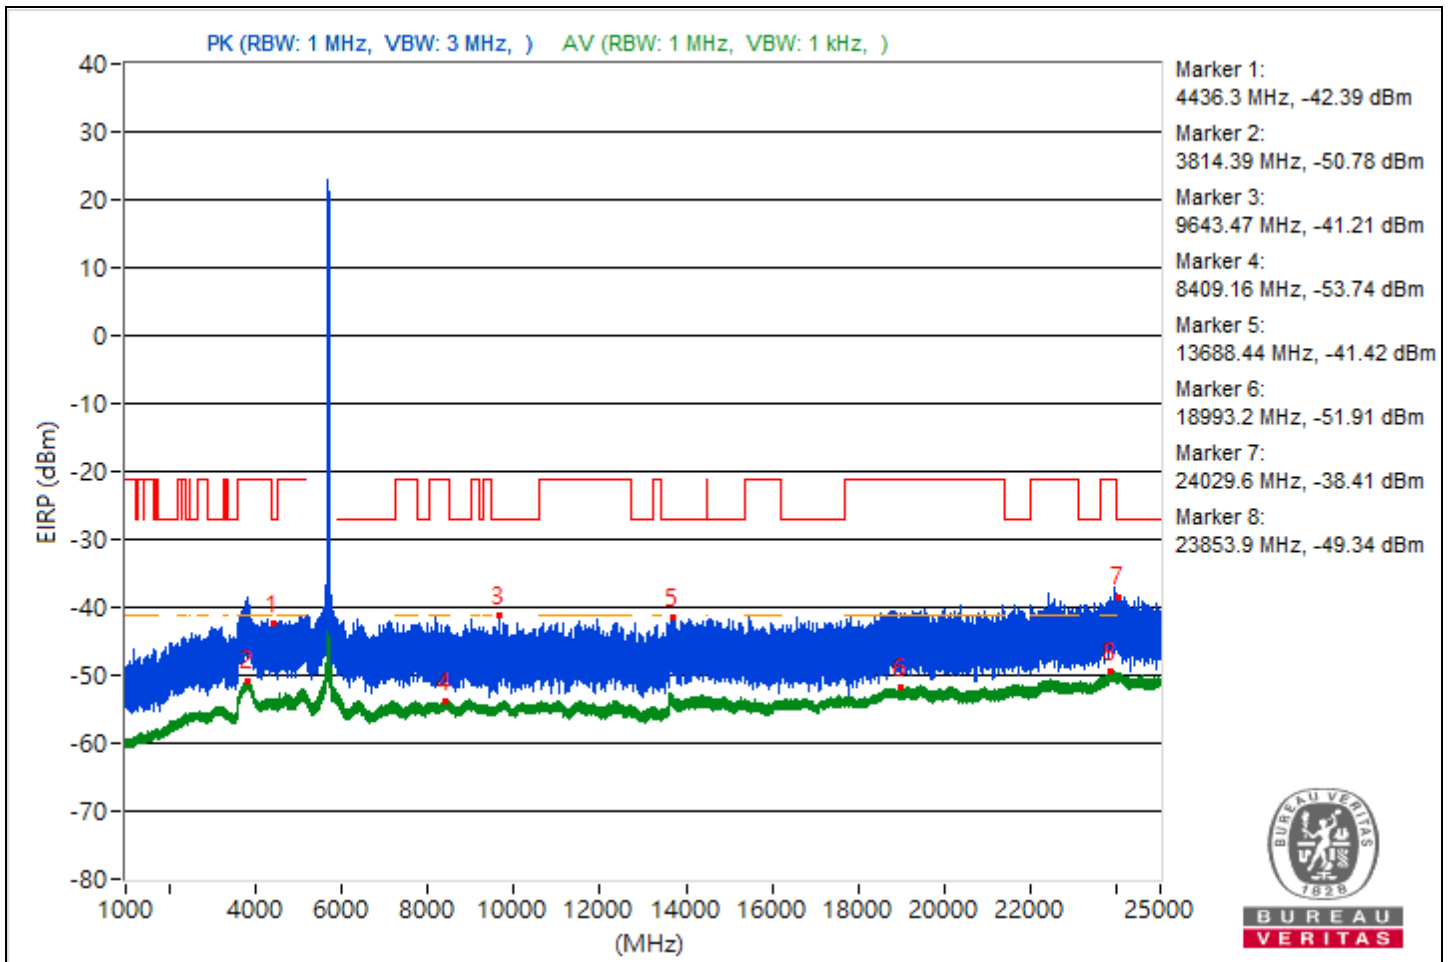

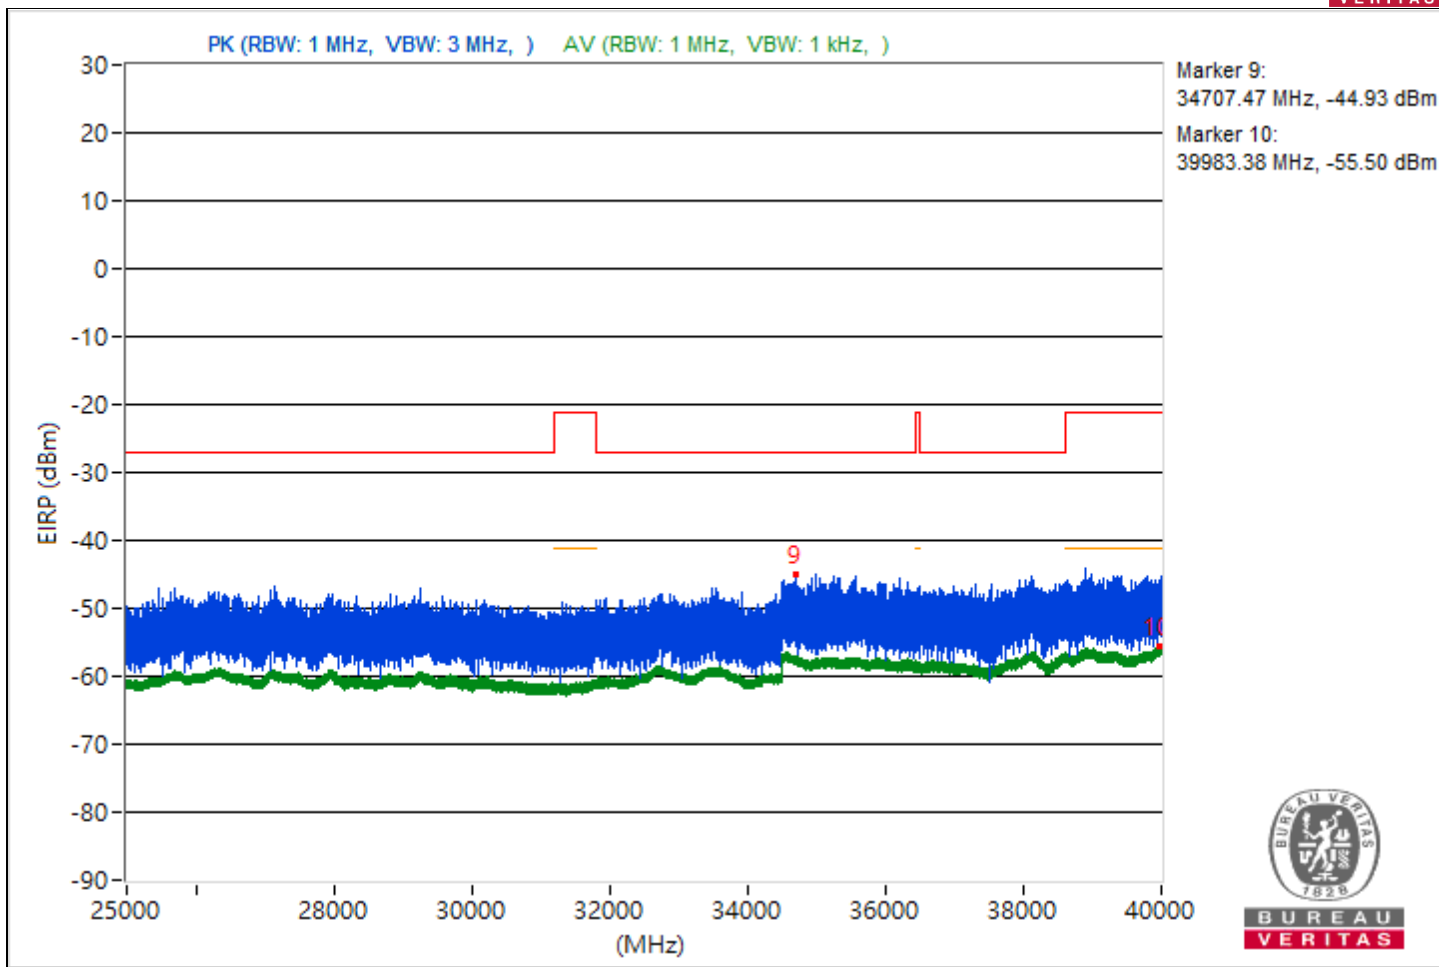



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4442.99	52.89 PK	68.26	-15.37	-47.29	4.92	-42.37
2	3844.57	44.39 AV	54	-9.61	-55.79	4.92	-50.87
3	#5943.48	53.62 PK	68.26	-14.64	-46.56	4.92	-41.64
4	8427.38	41.59 AV	54	-12.41	-58.59	4.92	-53.67
5	#13661.33	54.61 PK	68.26	-13.65	-45.57	4.92	-40.65
6	18963.5	43.35 AV	54	-10.65	-56.83	4.92	-51.91
7	#24549.5	57.23 PK	68.26	-11.03	-42.95	4.92	-38.03
8	23894.7	45.96 AV	54	-8.04	-54.22	4.92	-49.3
9	#34577.87	50.79 PK	68.26	-17.47	-49.39	4.92	-44.47
10	39988.98	39.78 AV	54	-14.22	-60.4	4.92	-55.48

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

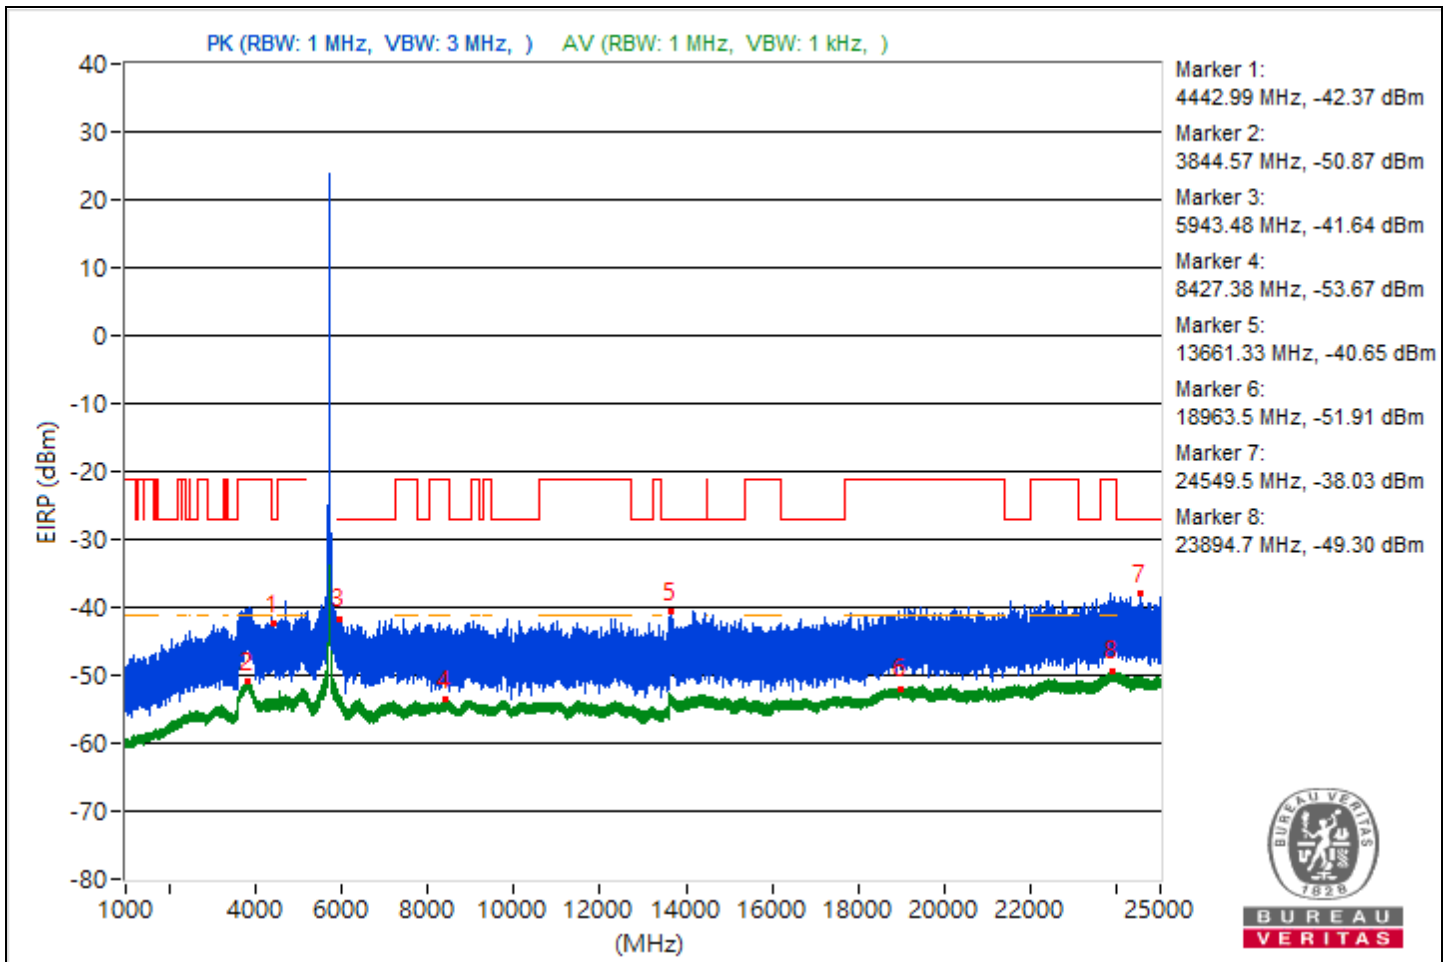

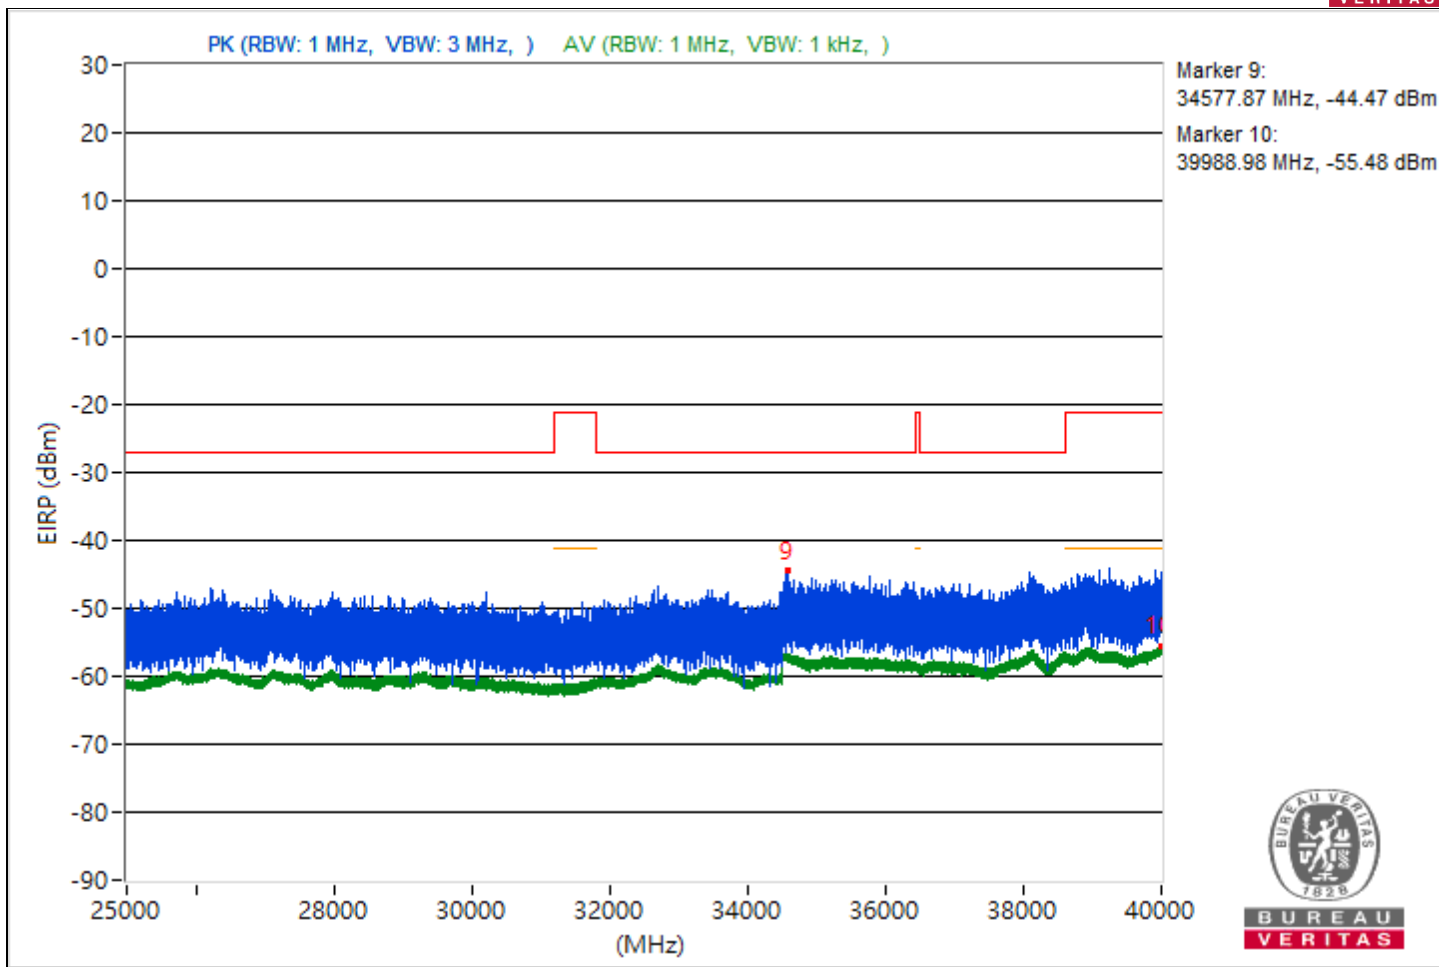





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4407.06	53.02 PK	68.26	-15.24	-47.16	4.92	-42.24
2	3819.52	44.61 AV	54	-9.39	-55.57	4.92	-50.65
3	#8914.84	53.67 PK	68.26	-14.59	-46.51	4.92	-41.59
4	8464.44	41.82 AV	54	-12.18	-58.36	4.92	-53.44
5	#13670.49	54.54 PK	68.26	-13.72	-45.64	4.92	-40.72
6	18993.8	43.35 AV	54	-10.65	-56.83	4.92	-51.91
7	#24447.1	56.55 PK	68.26	-11.71	-43.63	4.92	-38.71
8	23903.9	45.93 AV	54	-8.07	-54.25	4.92	-49.33
9	#38154.04	50.6 PK	68.26	-17.66	-49.58	4.92	-44.66
10	39965.6	39.81 AV	54	-14.19	-60.37	4.92	-55.45

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

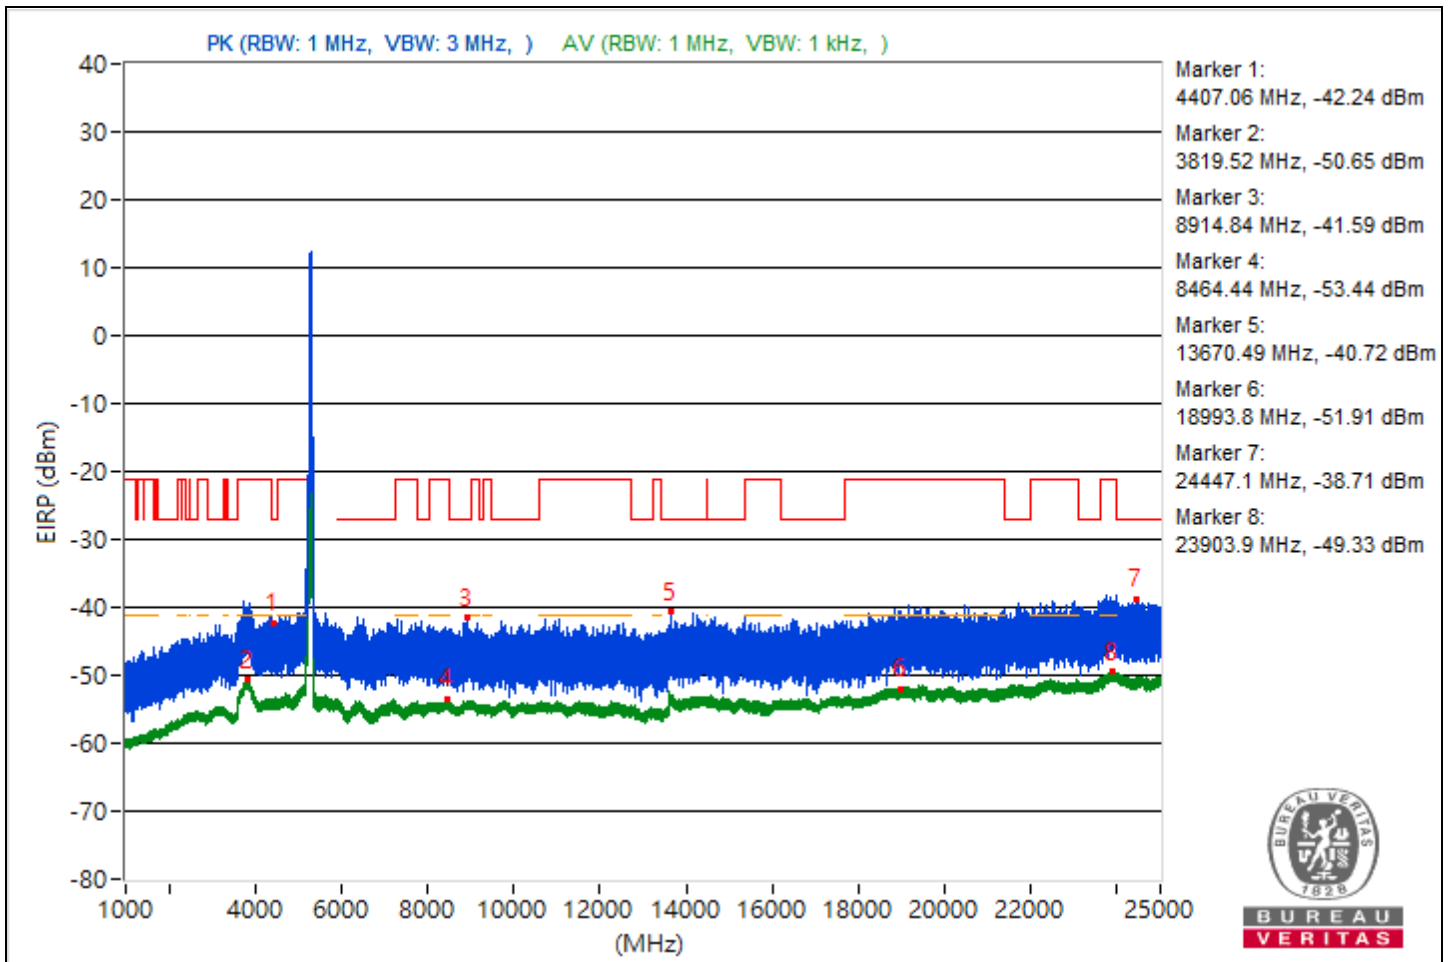

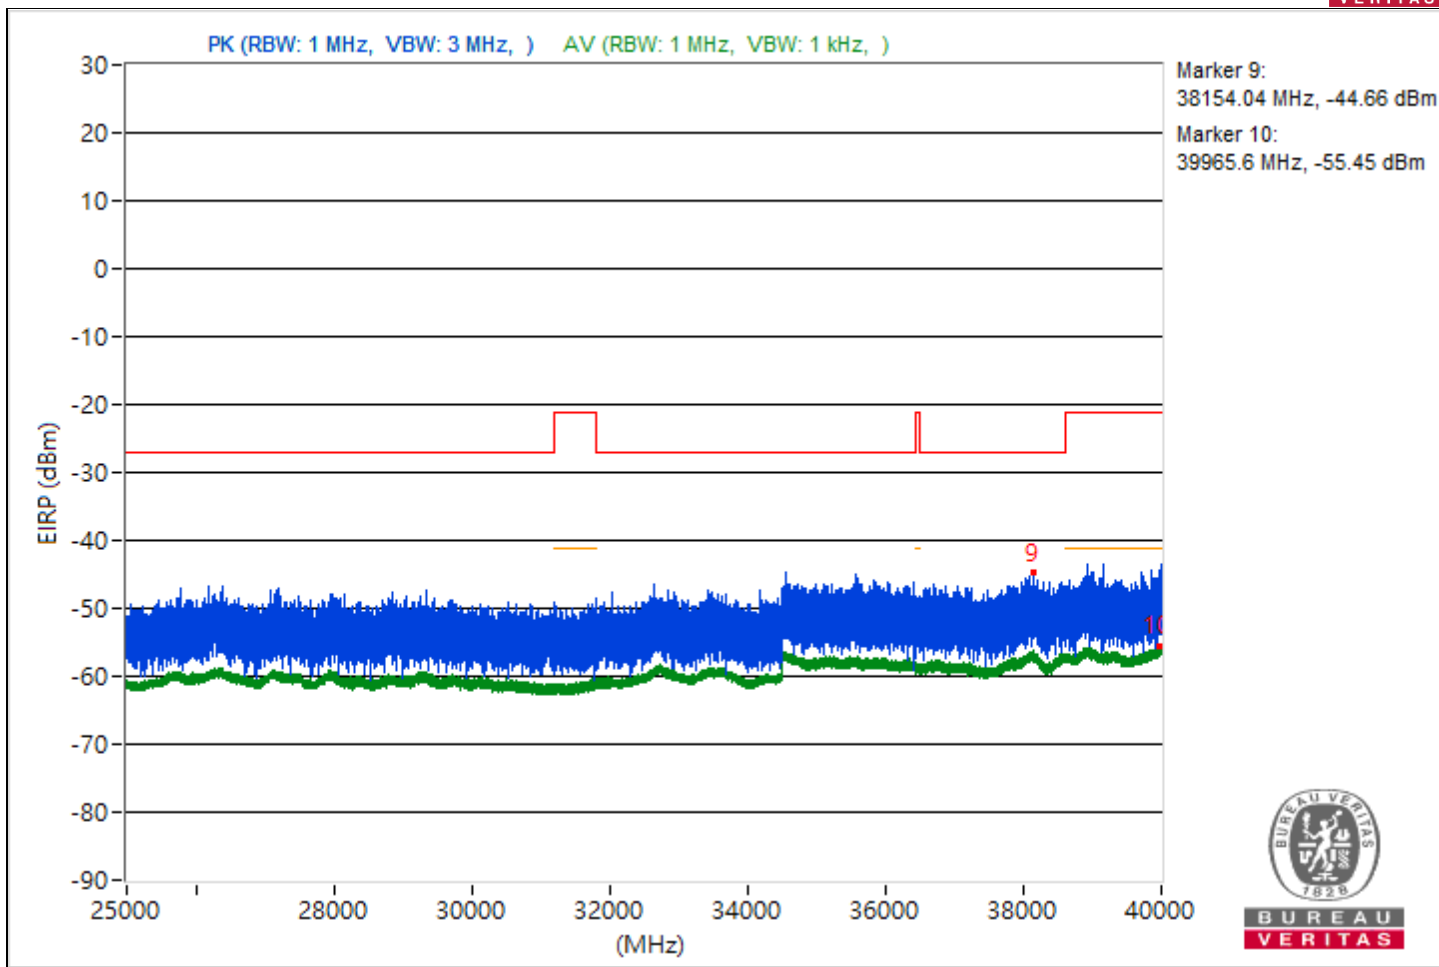





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4468.97	53.25 PK	68.26	-15.01	-46.93	4.92	-42.01
2	3833.29	44.42 AV	54	-9.58	-55.76	4.92	-50.84
3	#6311.44	54.6 PK	68.26	-13.66	-45.58	4.92	-40.66
4	9010.31	41.67 AV	54	-12.33	-58.51	4.92	-53.59
5	#13607.2	53.86 PK	68.26	-14.4	-46.32	4.92	-41.4
6	18985.7	43.52 AV	54	-10.48	-56.66	4.92	-51.74
7	#24673	57.36 PK	68.26	-10.9	-42.82	4.92	-37.9
8	23886.7	45.87 AV	54	-8.13	-54.31	4.92	-49.39
9	#35281.24	50.69 PK	68.26	-17.57	-49.49	4.92	-44.57
10	39961.33	39.91 AV	54	-14.09	-60.27	4.92	-55.35

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

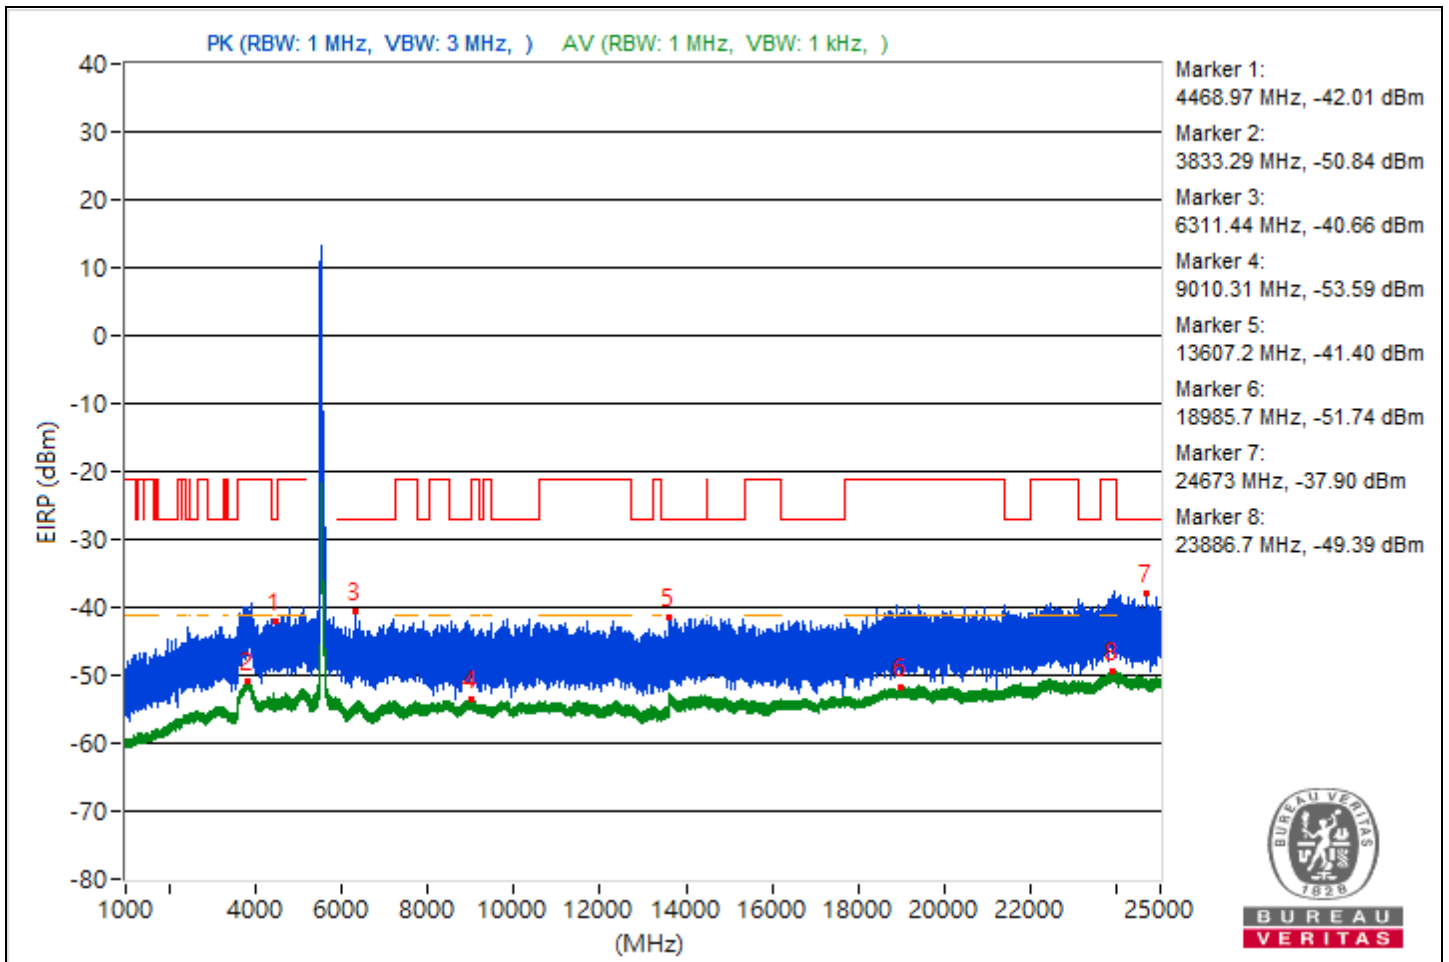

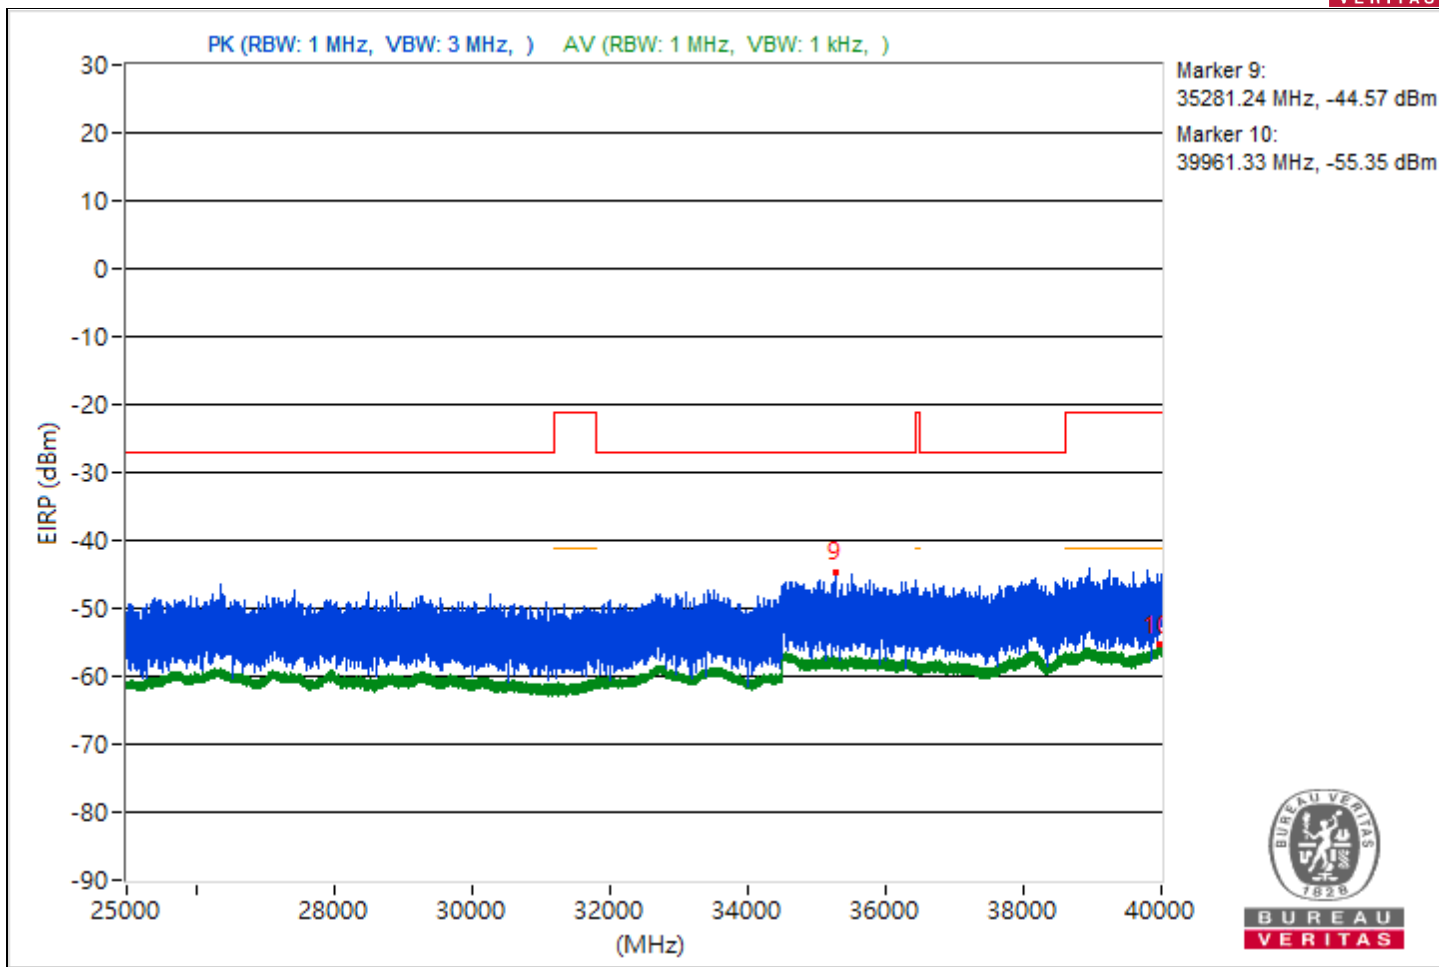



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4429.84	54.28 PK	68.26	-13.98	-45.9	4.92	-40.98
2	3796.19	44.37 AV	54	-9.63	-55.81	4.92	-50.89
3	#5950.24	53.95 PK	68.26	-14.31	-46.23	4.92	-41.31
4	8429.96	41.51 AV	54	-12.49	-58.67	4.92	-53.75
5	#17334.2	54.25 PK	68.26	-14.01	-45.93	4.92	-41.01
6	18973.2	43.39 AV	54	-10.61	-56.79	4.92	-51.87
7	#23522.8	57.32 PK	68.26	-10.94	-42.86	4.92	-37.94
8	23896.8	45.81 AV	54	-8.19	-54.37	4.92	-49.45
9	#38105.69	50.48 PK	68.26	-17.78	-49.7	4.92	-44.78
10	39958.58	39.82 AV	54	-14.18	-60.36	4.92	-55.44

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

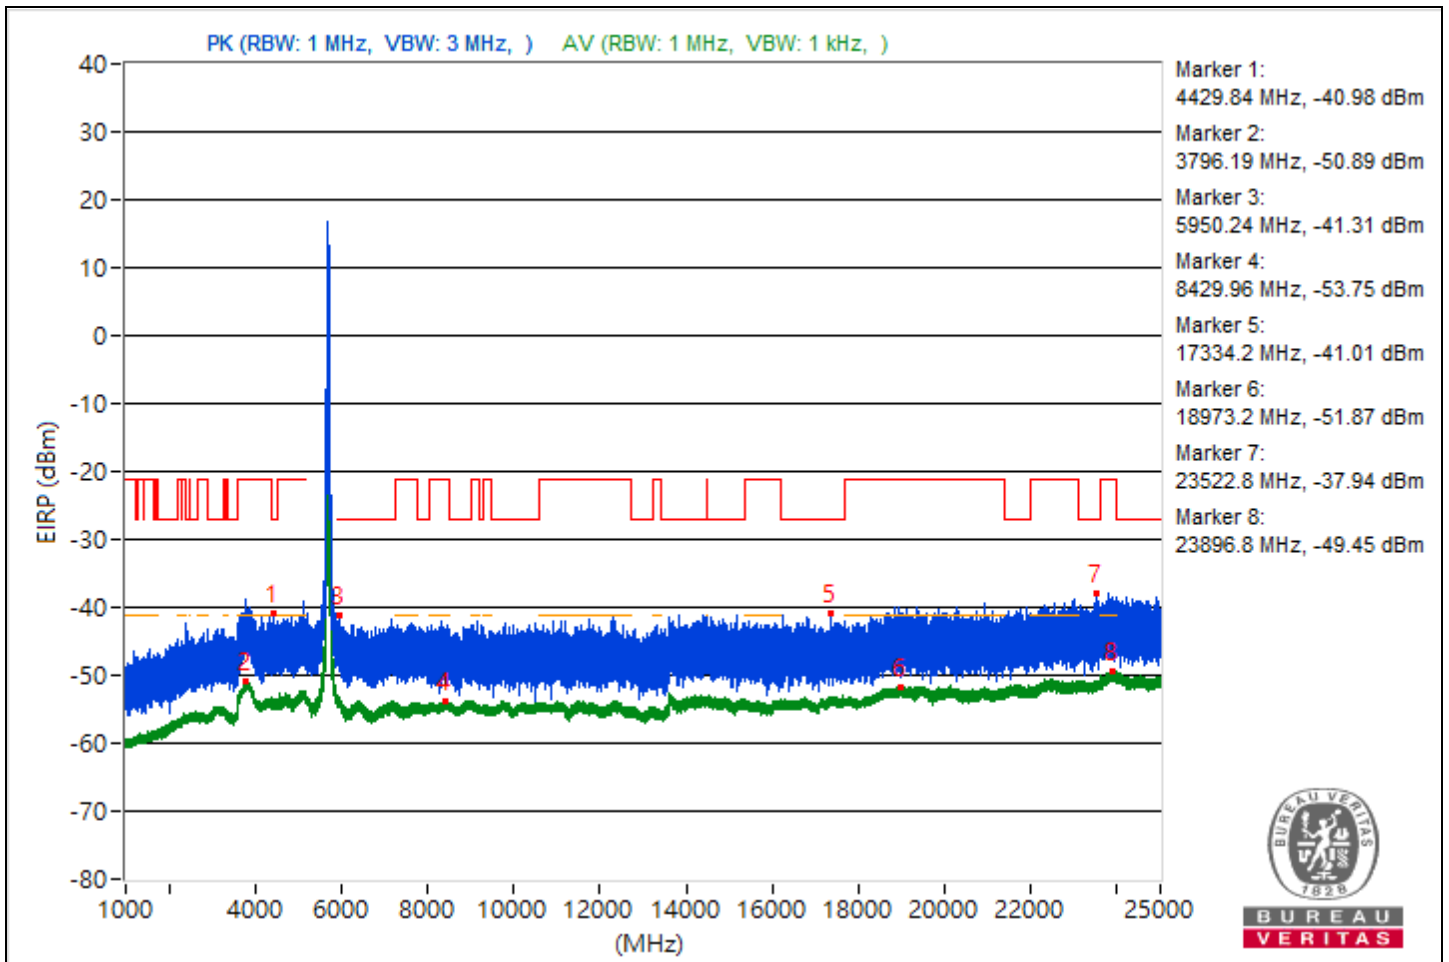

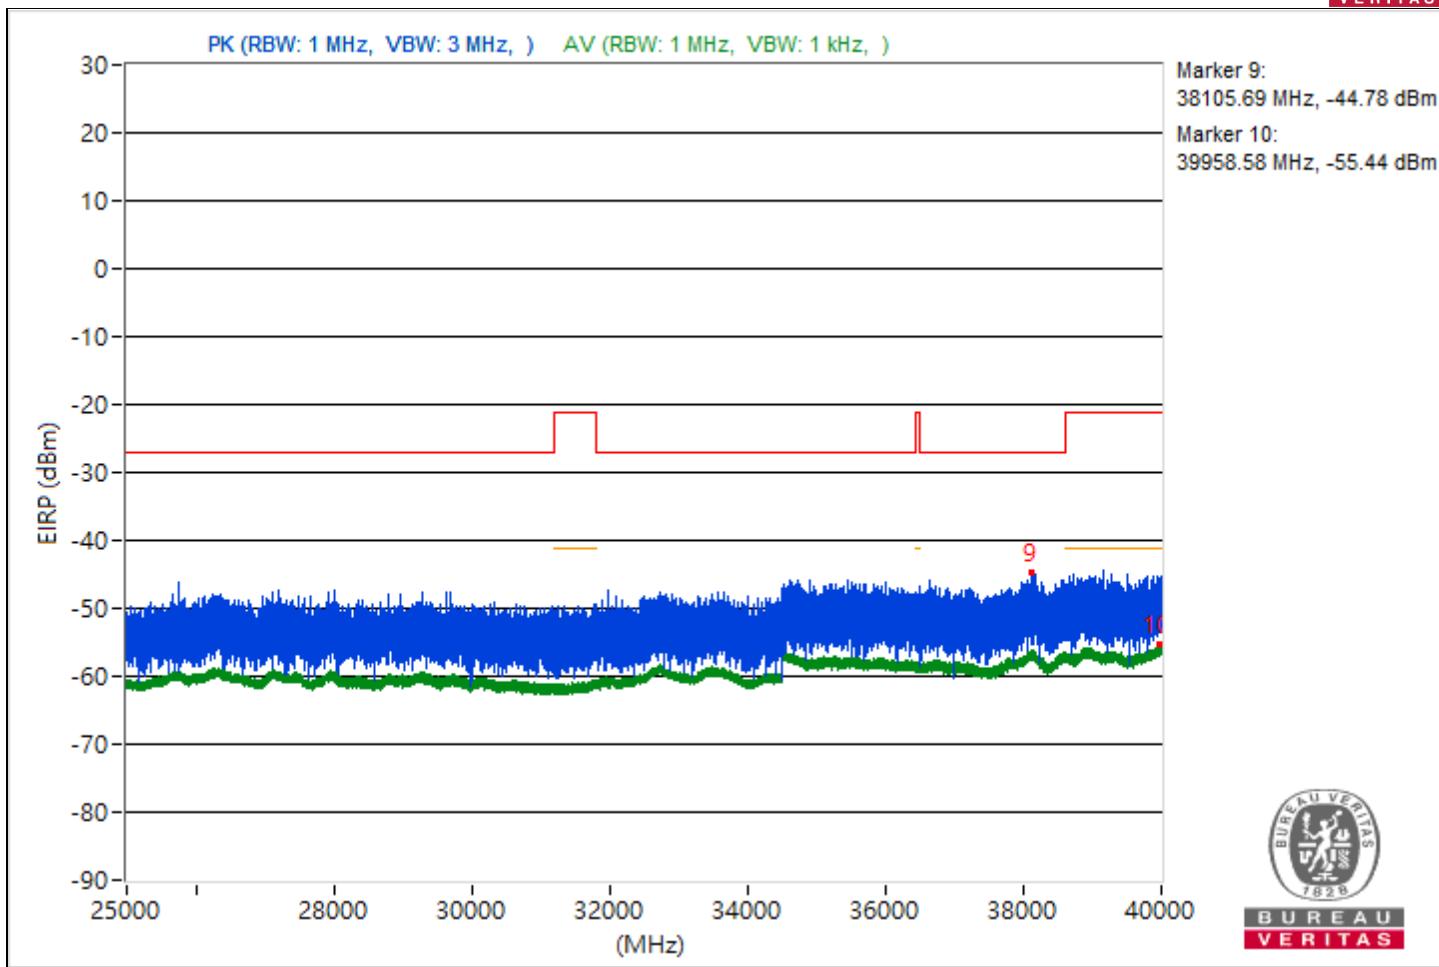



RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4474.57	53.79 PK	68.26	-14.47	-46.39	4.92	-41.47
2	5097.57	45.21 AV	54	-8.79	-54.97	4.92	-50.05
3	#6443.98	53.71 PK	68.26	-14.55	-46.47	4.92	-41.55
4	8400.53	41.61 AV	54	-12.39	-58.57	4.92	-53.65
5	#14067.11	54.68 PK	68.26	-13.58	-45.5	4.92	-40.58
6	18978.1	43.38 AV	54	-10.62	-56.8	4.92	-51.88
7	#24596.3	58.57 PK	68.26	-9.69	-41.61	4.92	-36.69
8	23911.3	45.85 AV	54	-8.15	-54.33	4.92	-49.41
9	#37959.38	50.39 PK	68.26	-17.87	-49.79	4.92	-44.87
10	39973.87	39.79 AV	54	-14.21	-60.39	4.92	-55.47

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

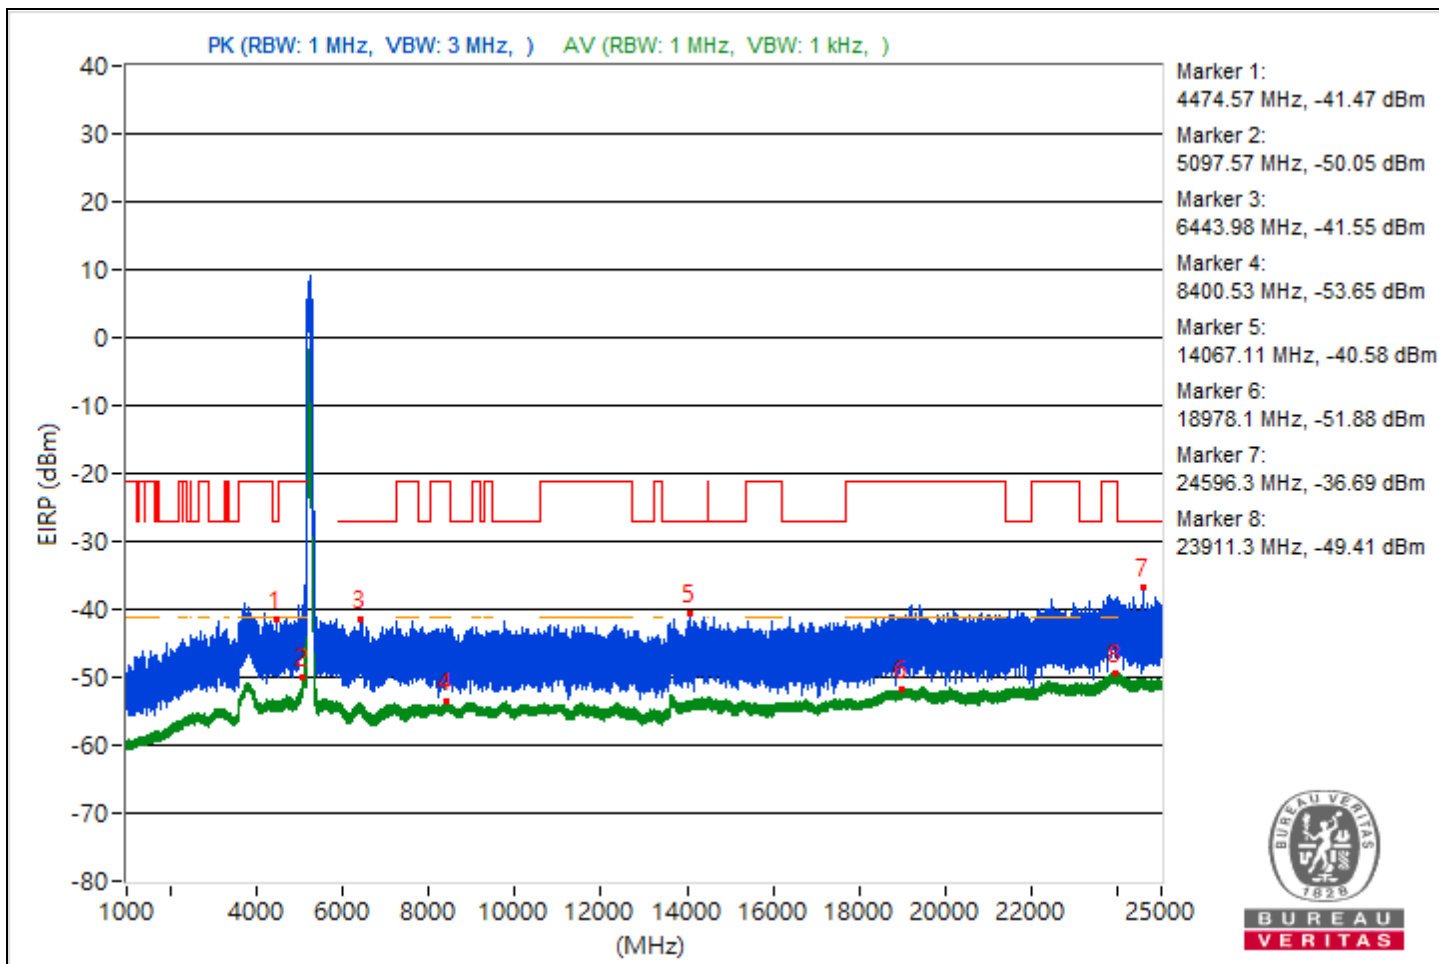

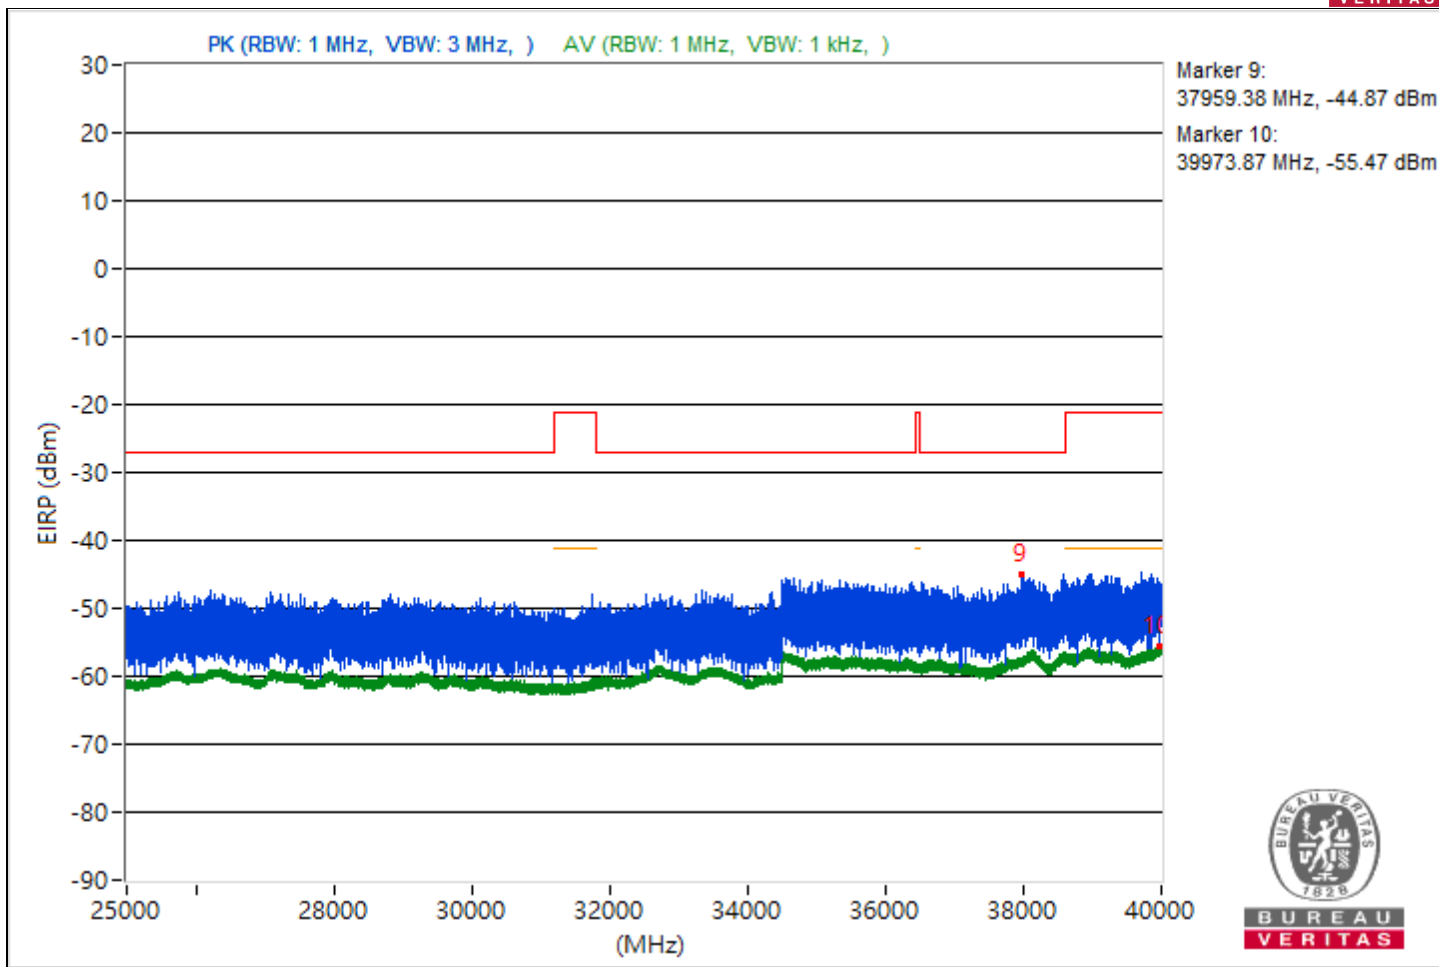





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4429.53	52.69 PK	68.26	-15.57	-47.49	4.92	-42.57
2	3840.52	44.41 AV	54	-9.59	-55.77	4.92	-50.85
3	#8970.22	53.57 PK	68.26	-14.69	-46.61	4.92	-41.69
4	9052.89	41.59 AV	54	-12.41	-58.59	4.92	-53.67
5	#15031.02	54.17 PK	68.26	-14.09	-46.01	4.92	-41.09
6	18986	43.44 AV	54	-10.56	-56.74	4.92	-51.82
7	#21809.7	56.66 PK	68.26	-11.6	-43.52	4.92	-38.6
8	23888.2	46.05 AV	54	-7.95	-54.13	4.92	-49.21
9	#38573.69	51.29 PK	68.26	-16.97	-48.89	4.92	-43.97
10	39989.51	39.88 AV	54	-14.12	-60.3	4.92	-55.38

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

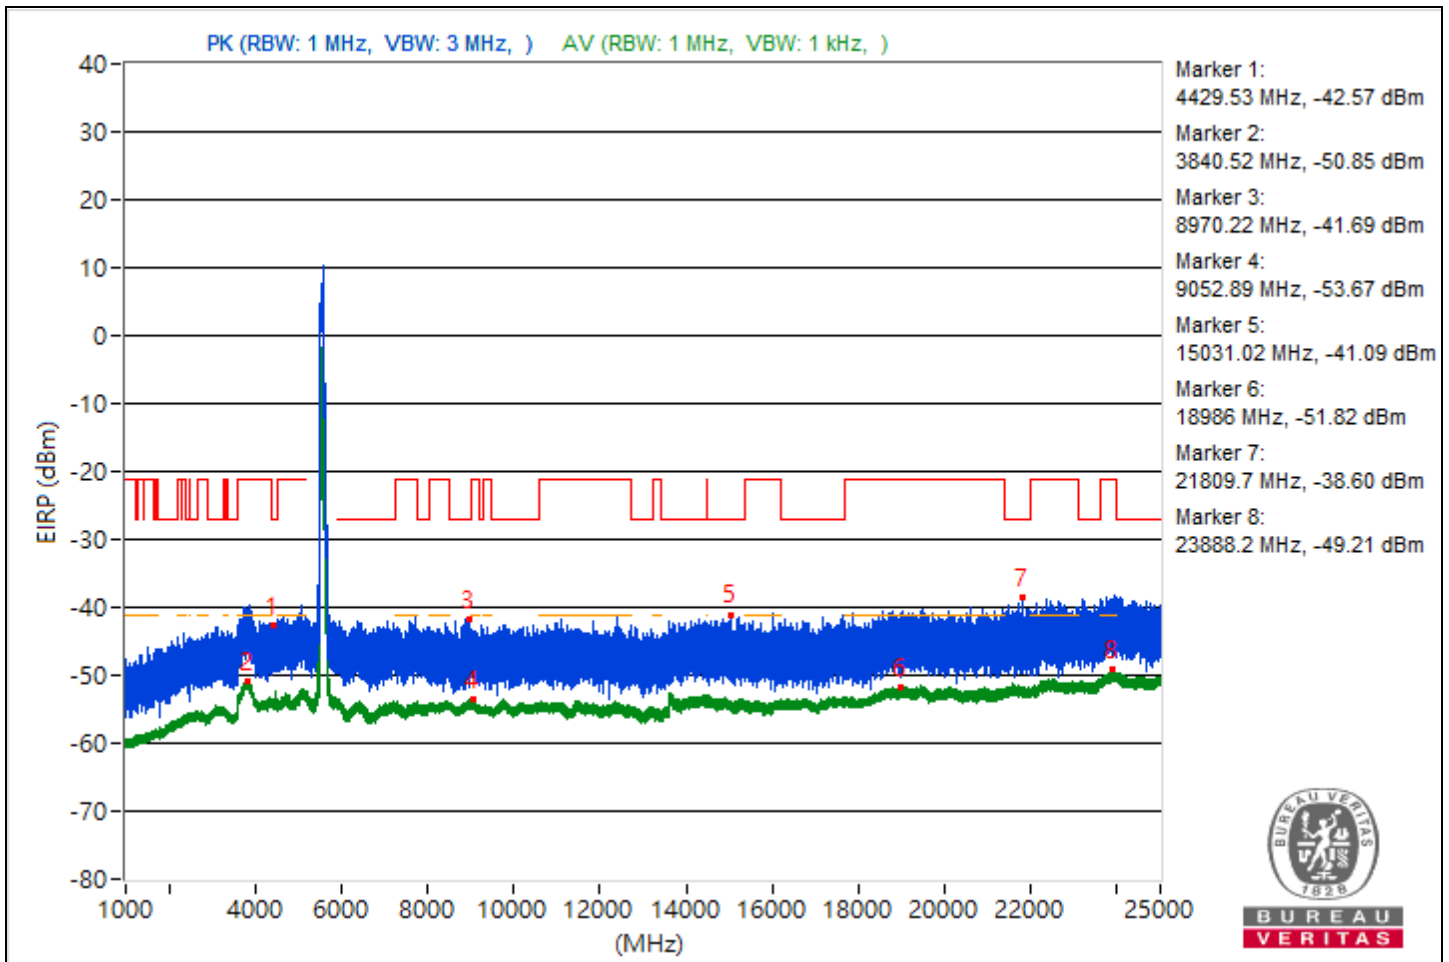

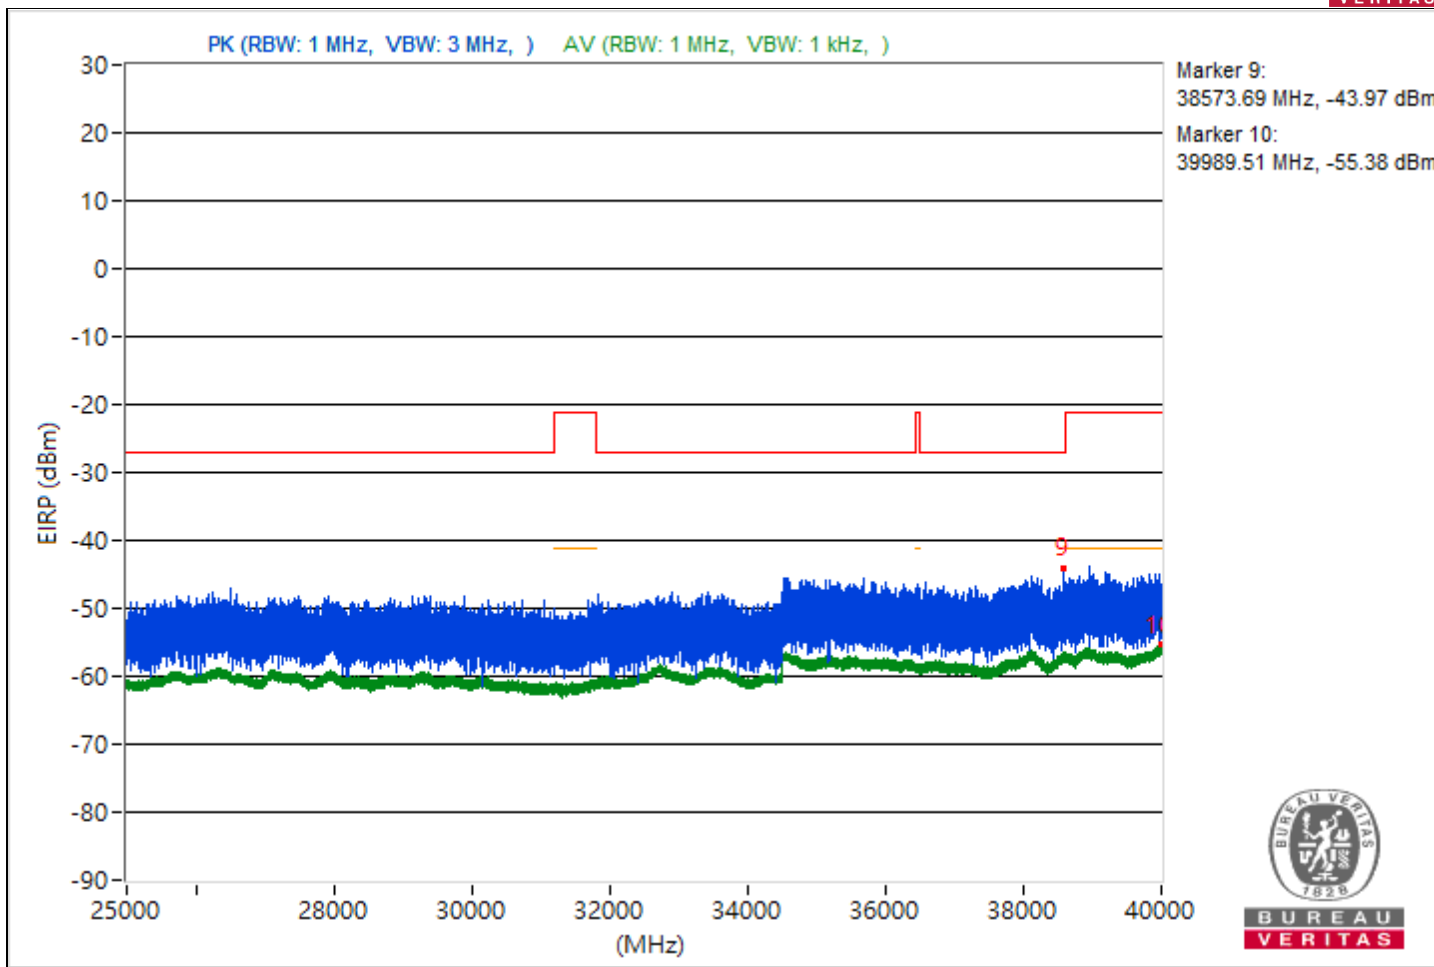





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4406.12	53.54 PK	68.26	-14.72	-46.64	4.92	-41.72
2	5098.03	45.78 AV	54	-8.22	-54.4	4.92	-49.48
3	#8505.24	53.65 PK	68.26	-14.61	-46.53	4.92	-41.61
4	8400.44	42.04 AV	54	-11.96	-58.14	4.92	-53.22
5	#14389.96	53.72 PK	68.26	-14.54	-46.46	4.92	-41.54
6	18739.9	43.48 AV	54	-10.52	-56.7	4.92	-51.78
7	#24756.9	57.14 PK	68.26	-11.12	-43.04	4.92	-38.12
8	23892.9	45.99 AV	54	-8.01	-54.19	4.92	-49.27
9	#34601.96	50.24 PK	68.26	-18.02	-49.94	4.92	-45.02
10	39994.49	39.99 AV	54	-14.01	-60.19	4.92	-55.27

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

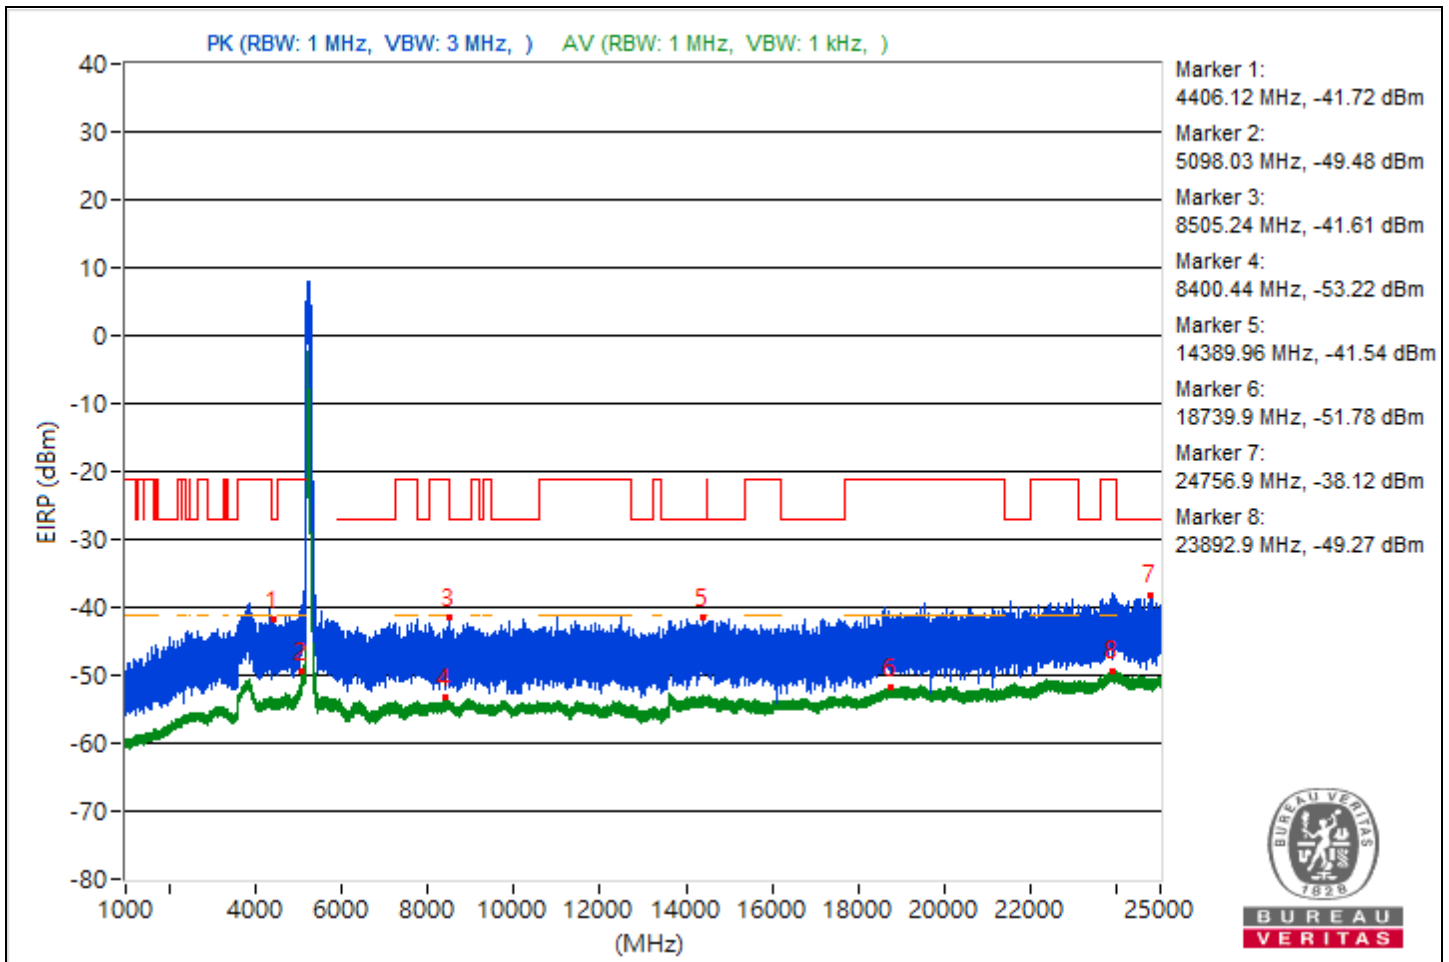

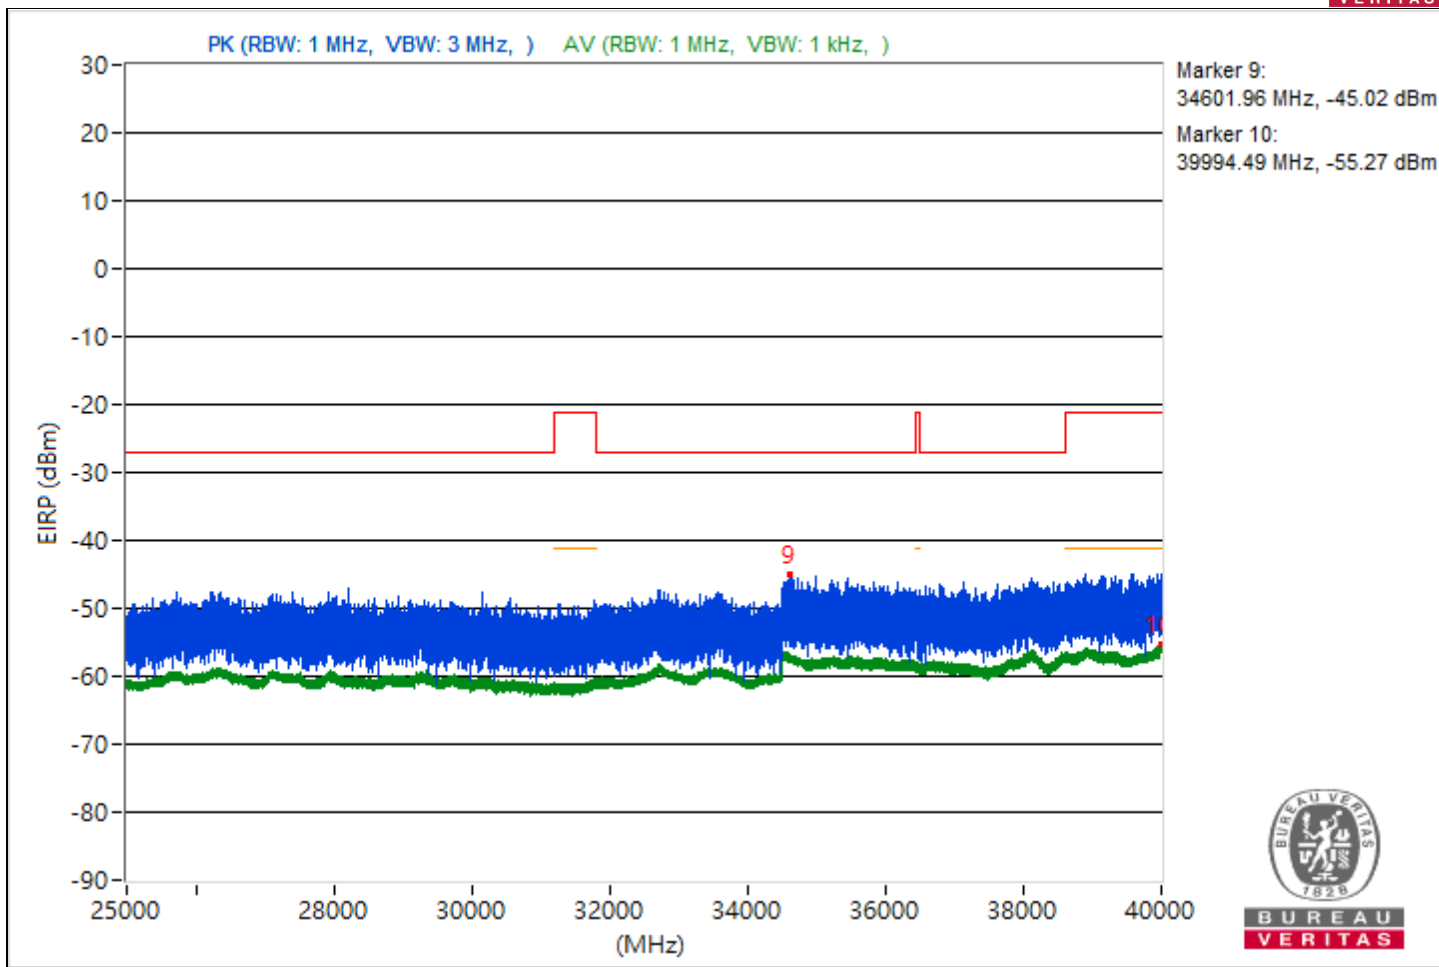





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4456.44	53.99 PK	68.26	-14.27	-46.19	4.92	-41.27
2	3823.88	44.49 AV	54	-9.51	-55.69	4.92	-50.77
3	#9846.67	53.48 PK	68.26	-14.78	-46.7	4.92	-41.78
4	8479.47	41.63 AV	54	-12.37	-58.55	4.92	-53.63
5	#14344	55.24 PK	68.26	-13.02	-44.94	4.92	-40.02
6	18970.3	43.42 AV	54	-10.58	-56.76	4.92	-51.84
7	#24120.2	57.66 PK	68.26	-10.6	-42.52	4.92	-37.6
8	23908.4	45.95 AV	54	-8.05	-54.23	4.92	-49.31
9	#38146.67	50.56 PK	68.26	-17.7	-49.62	4.92	-44.7
10	39999.82	39.8 AV	54	-14.2	-60.38	4.92	-55.46

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

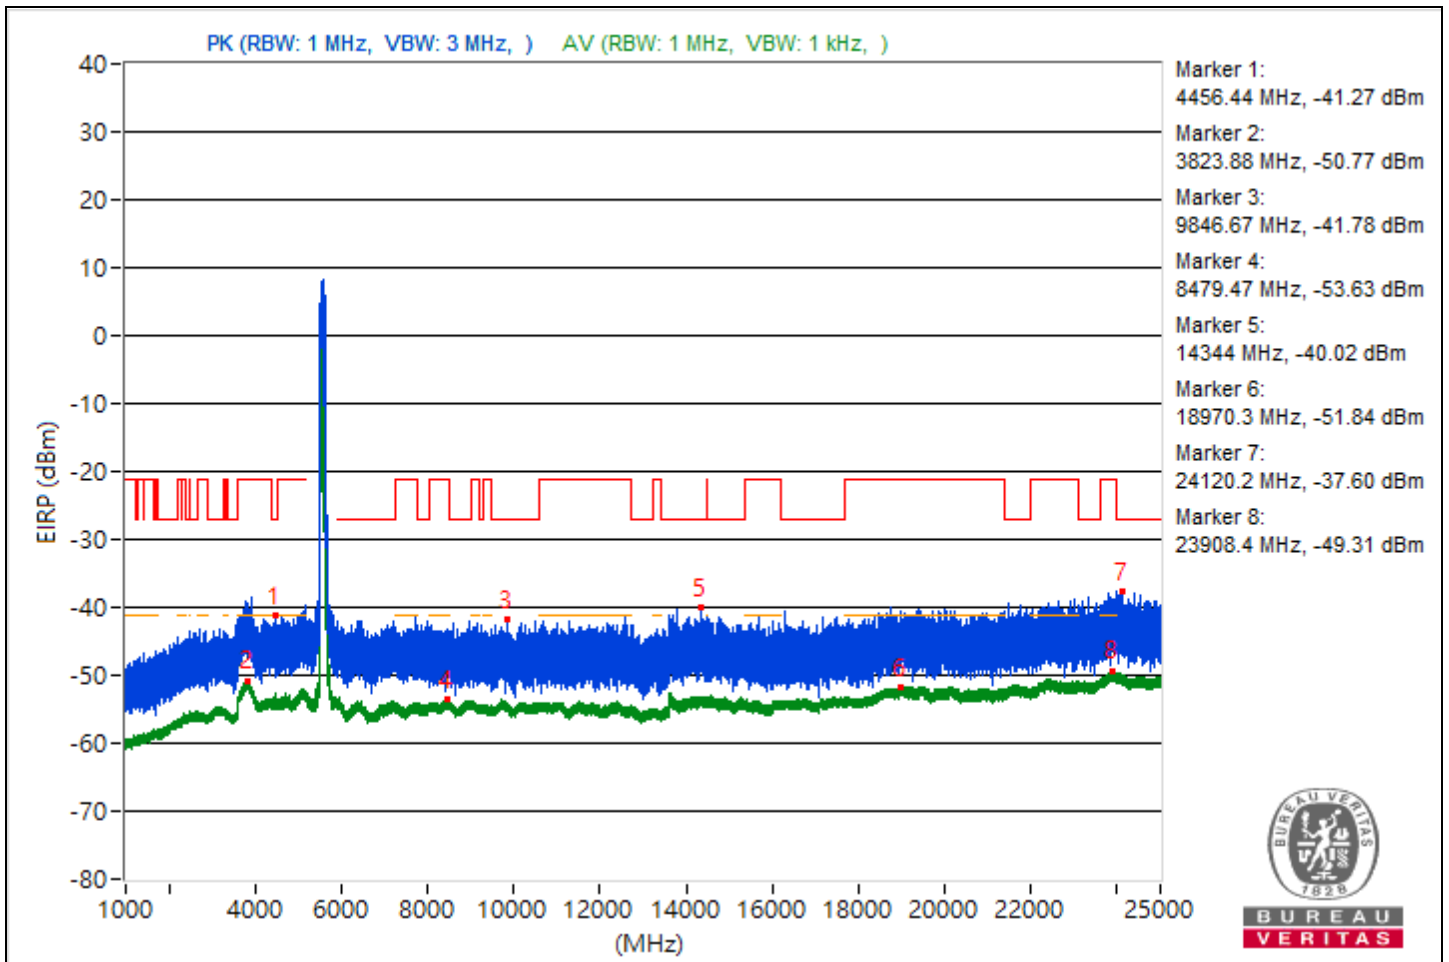

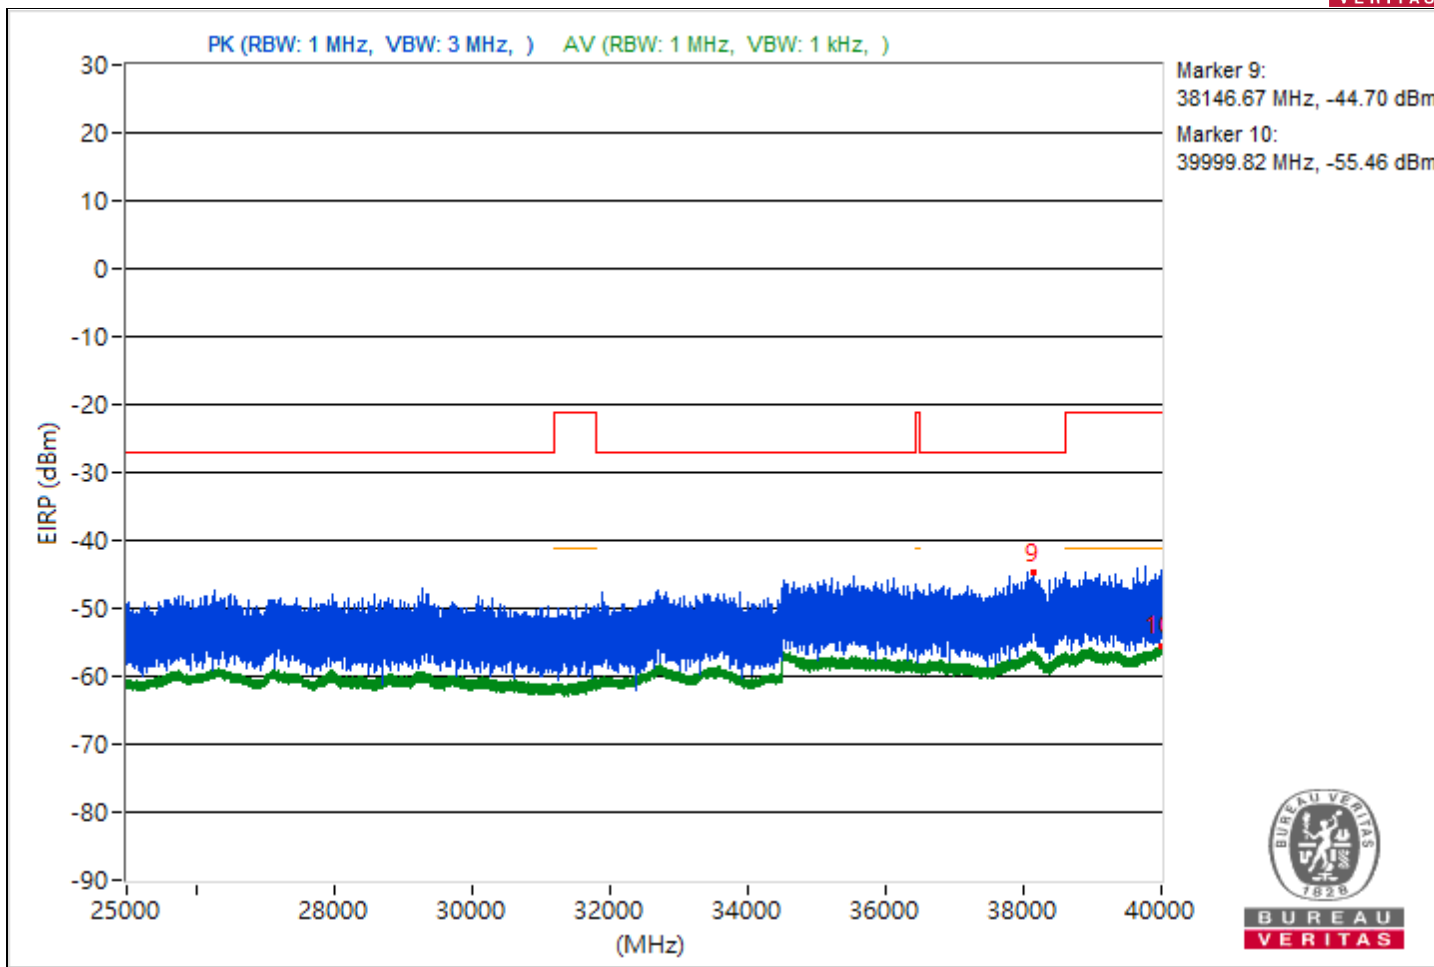


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5259.37	118.32 PK			18.14	4.92	23.06
2	*5260.9	107.9 AV			7.72	4.92	12.64
3	5353.05	62.32 PK	74	-11.68	-37.86	4.92	-32.94
4	5350	50.34 AV	54	-3.66	-49.84	4.92	-44.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

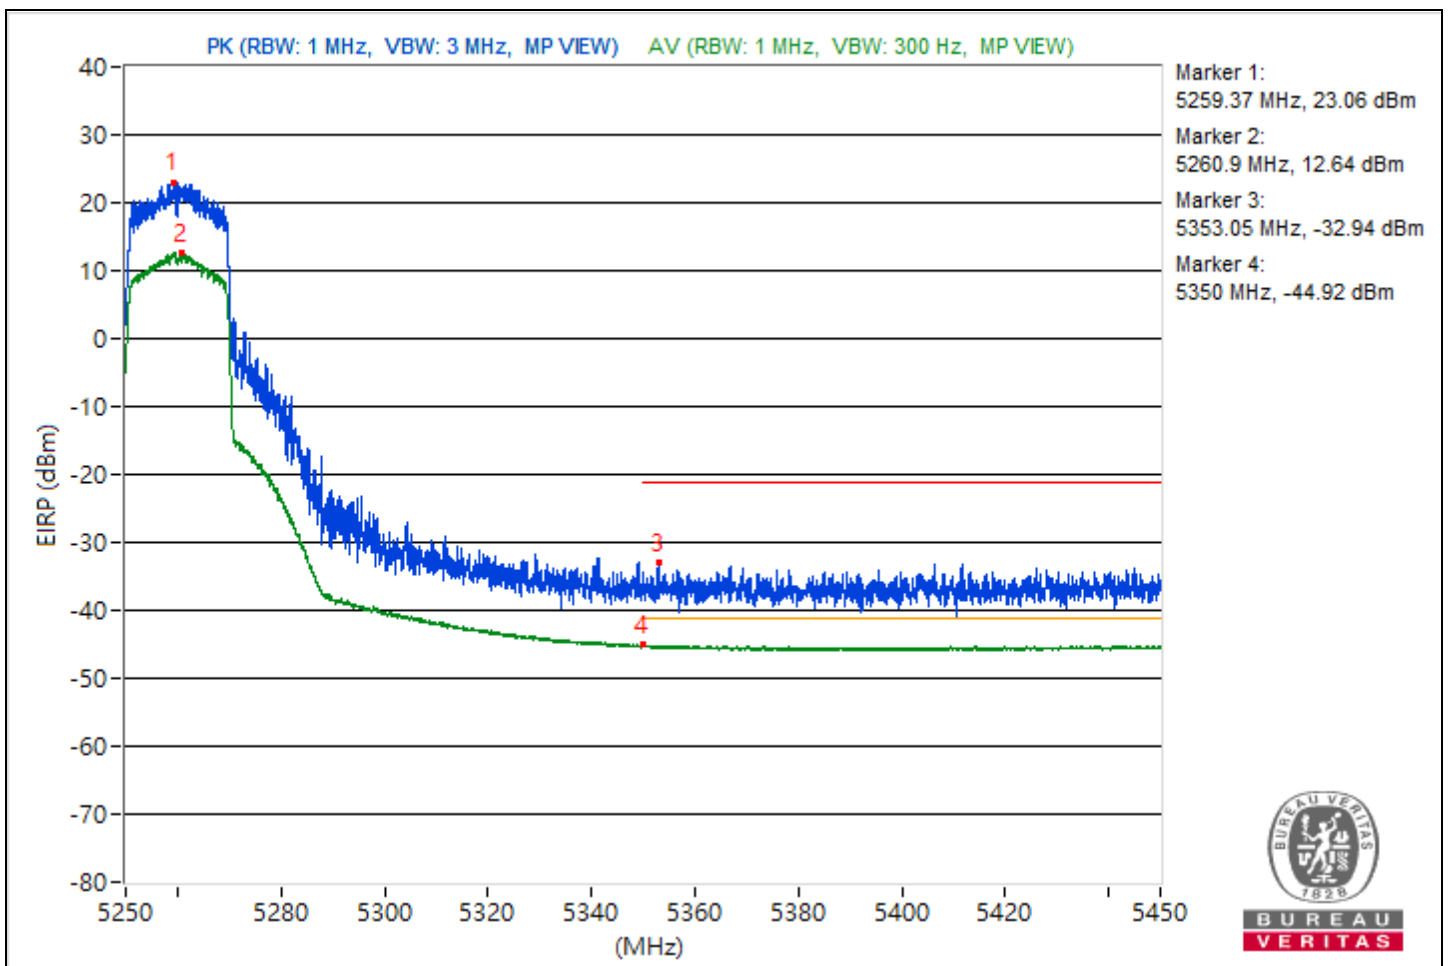


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5297.23	118.09 PK			17.91	4.92	22.83
2	*5299.48	107.4 AV			7.22	4.92	12.14
3	5350.05	67.57 PK	74	-6.43	-32.61	4.92	-27.69
4	5352.52	52.73 AV	54	-1.27	-47.45	4.92	-42.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

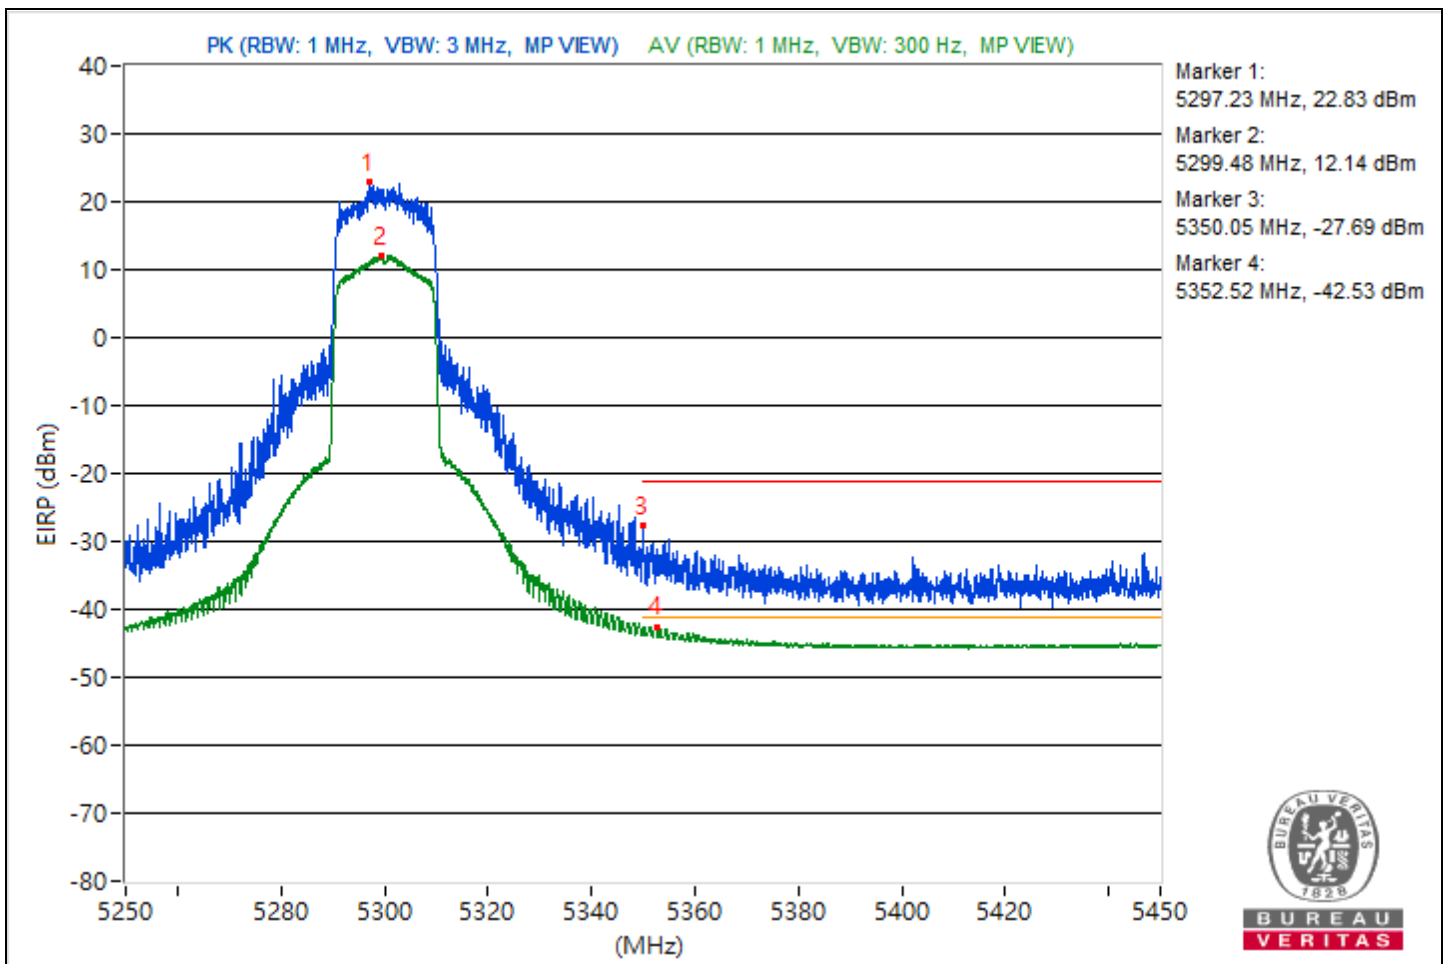


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5319.15	117.23 PK			17.05	4.92	21.97
2	*5319.43	107.54 AV			7.36	4.92	12.28
3	5350	68.95 PK	74	-5.05	-31.23	4.92	-26.31
4	5350.2	53.52 AV	54	-0.48	-46.66	4.92	-41.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

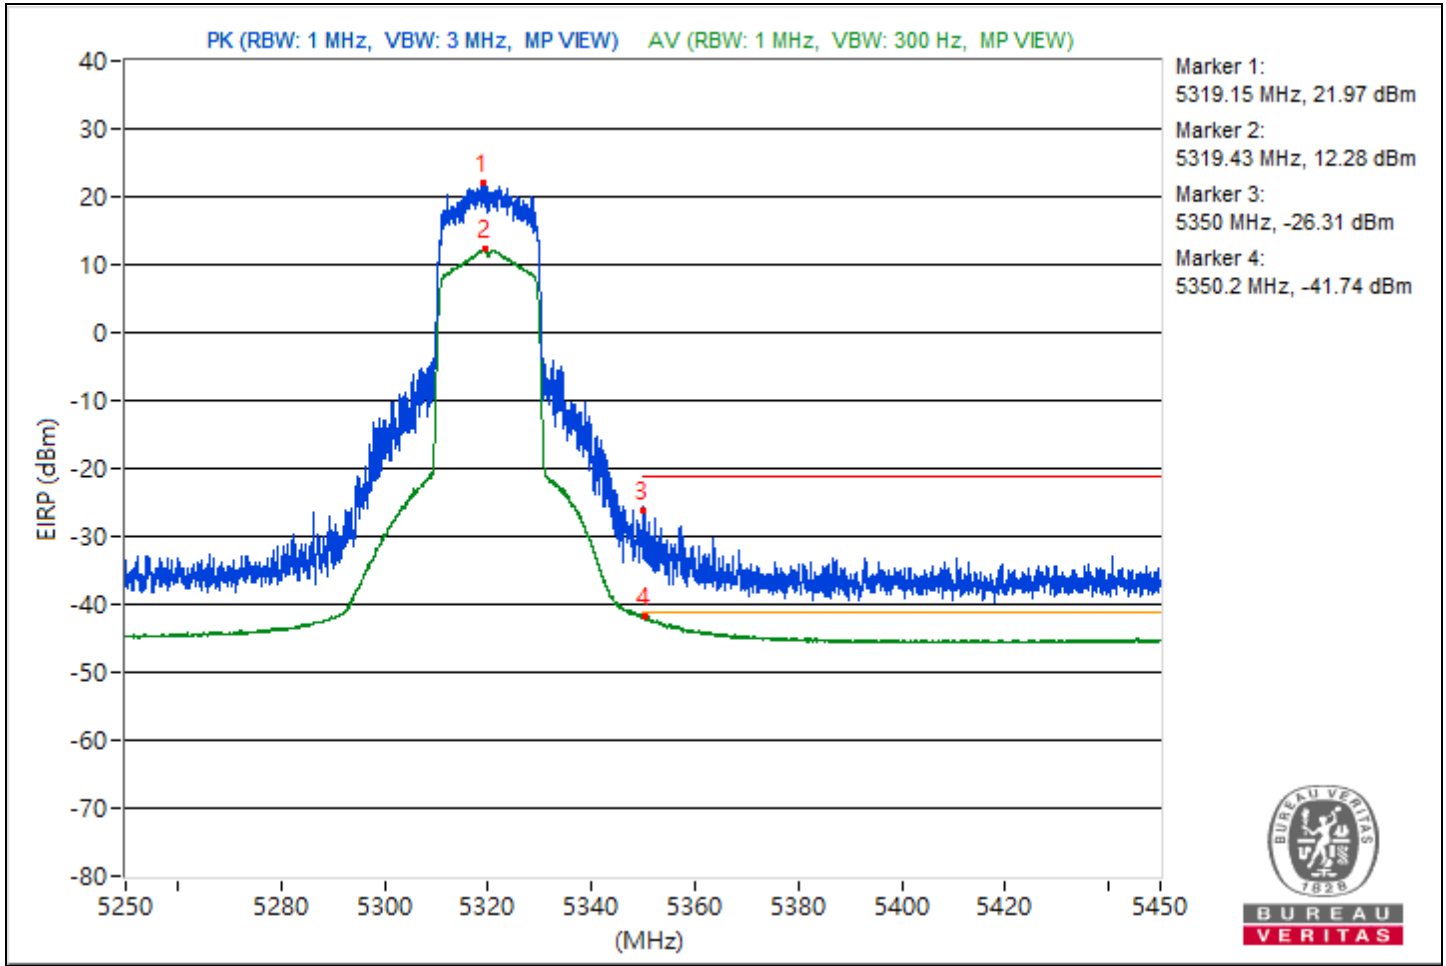


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5500.69	117.88 PK			17.7	4.92	22.62
2	5457.03	62.71 PK	74	-11.29	-37.47	4.92	-32.55
3	#5466.91	67.7 PK	68.26	-0.56	-32.48	4.92	-27.56
4	*5499.31	107.07 AV			6.89	4.92	11.81
5	5459.84	51.1 AV	54	-2.9	-49.08	4.92	-44.16

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

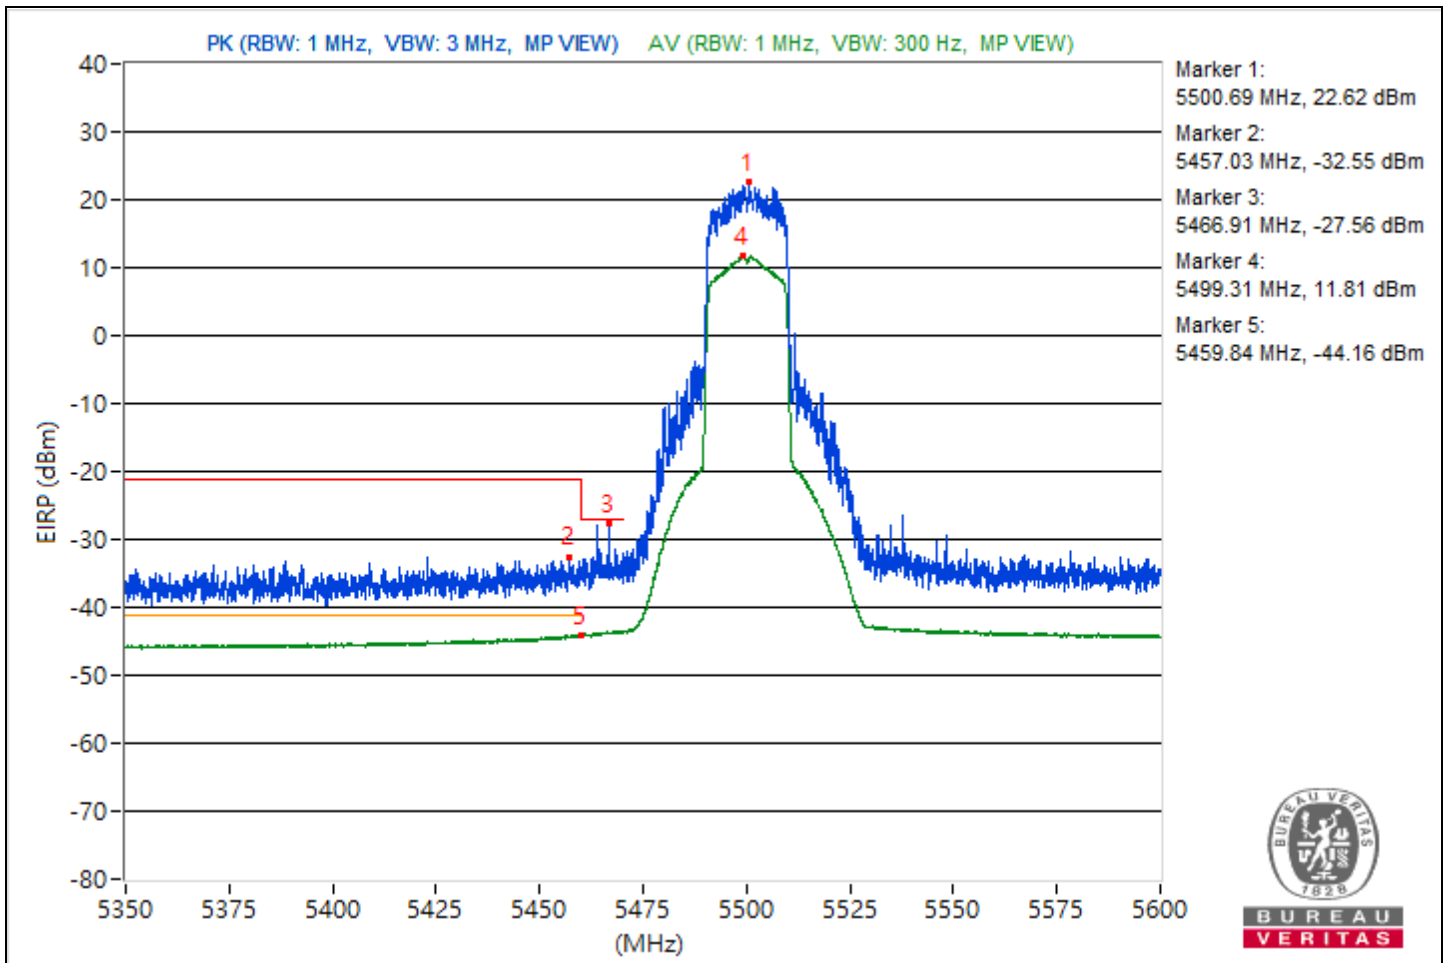


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5574.66	119.21 PK			19.03	4.92	23.95
2	5432.94	63.02 PK	74	-10.98	-37.16	4.92	-32.24
3	#5466.16	62.71 PK	68.26	-5.55	-37.47	4.92	-32.55
4	*5579.25	107.62 AV			7.44	4.92	12.36
5	5454.91	50.22 AV	54	-3.78	-49.96	4.92	-45.04

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

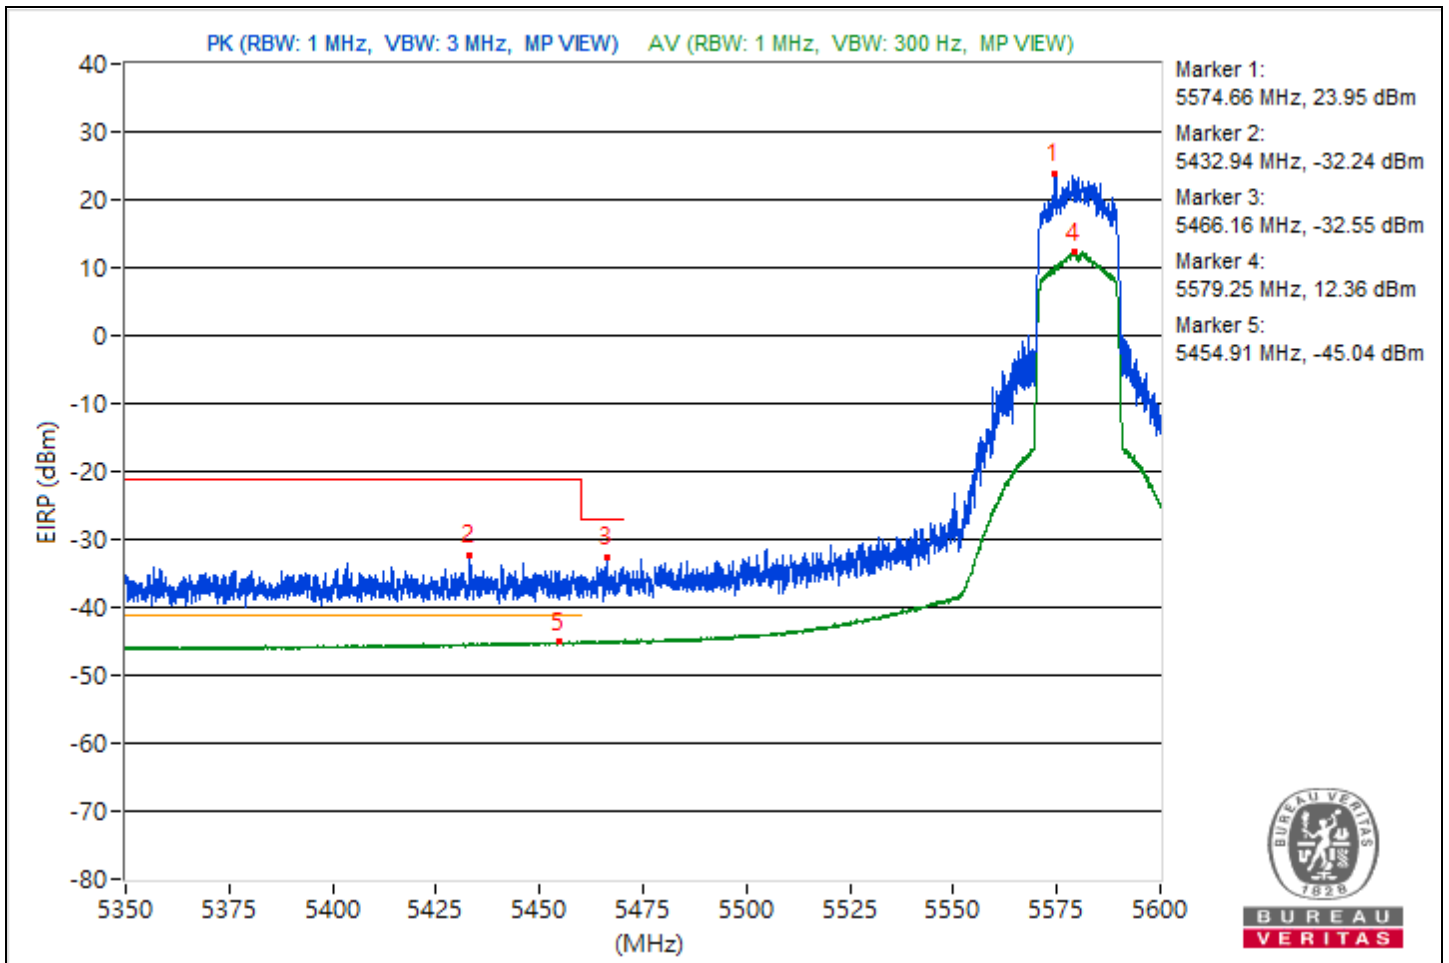

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5699.3	118.05			17.87	4.92	22.79
2	#5725.82	67.43	68.26	-0.83	-32.75	4.92	-27.83

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

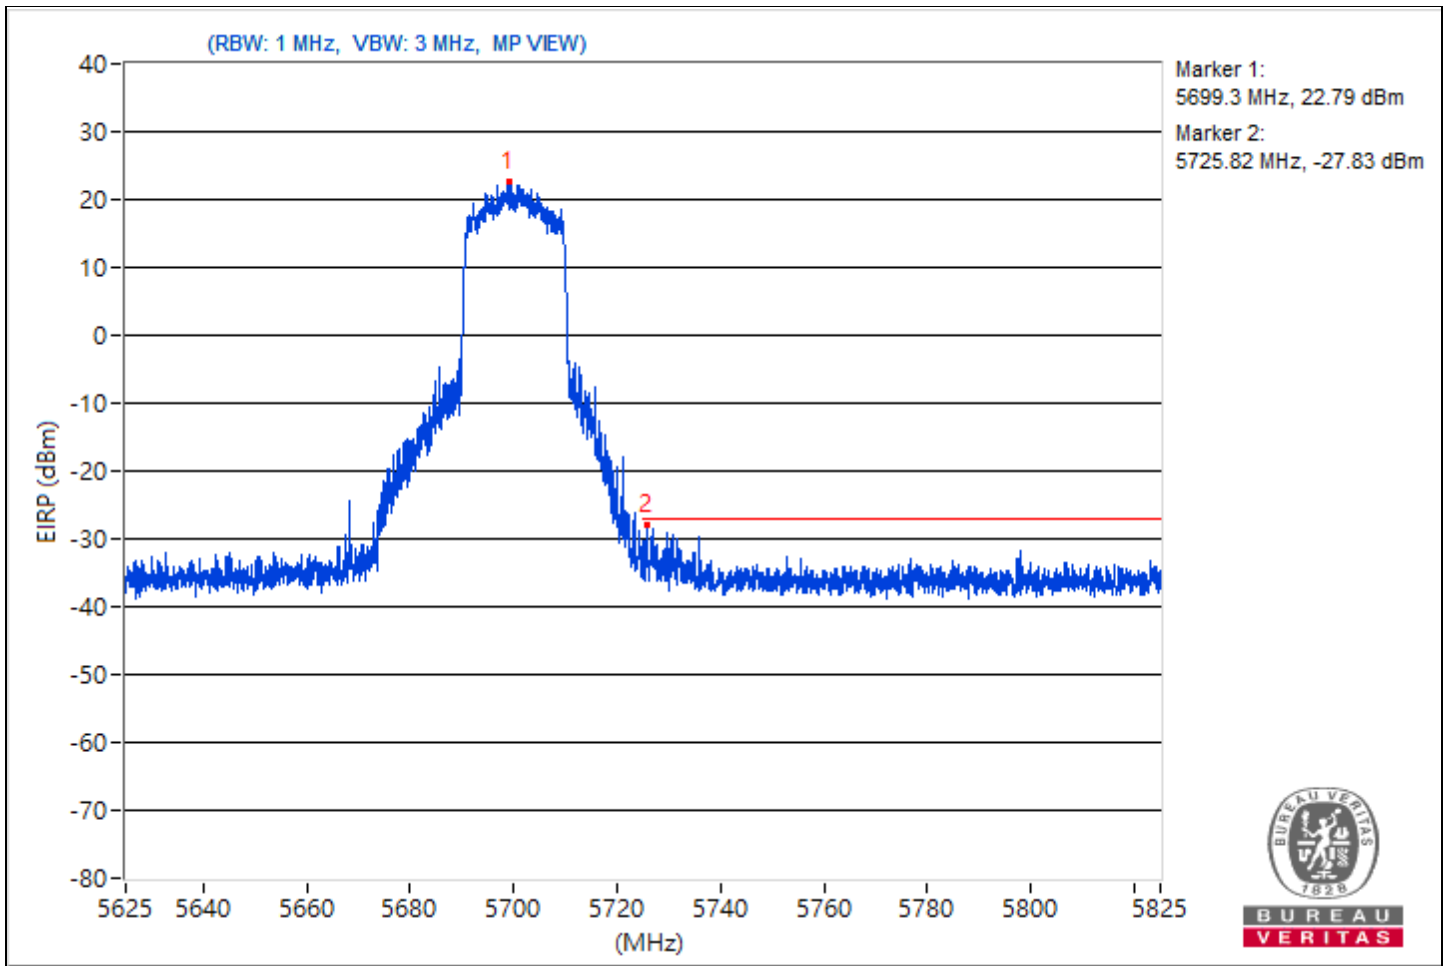


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5722.91	118.45			18.27	4.92	23.19
2	#5897.96	63.61	68.26	-4.65	-36.57	4.92	-31.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

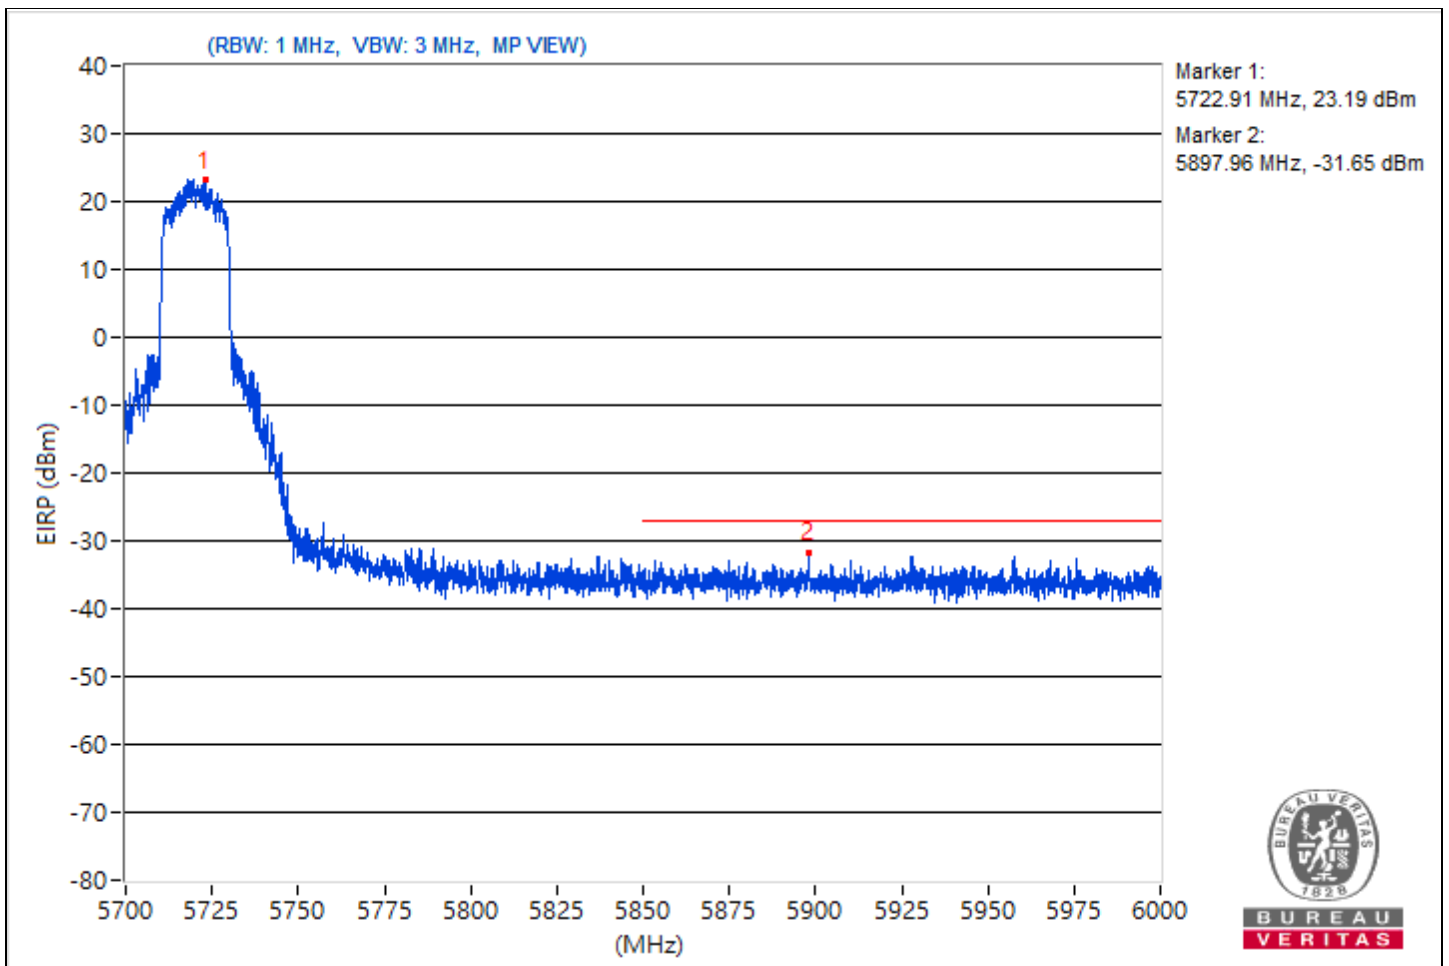


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5267.05	117.26 PK			17.08	4.92	22
2	*5268.85	105.65 AV			5.47	4.92	10.39
3	5351.07	66.13 PK	74	-7.87	-34.05	4.92	-29.13
4	5350.45	53.48 AV	54	-0.52	-46.7	4.92	-41.78

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

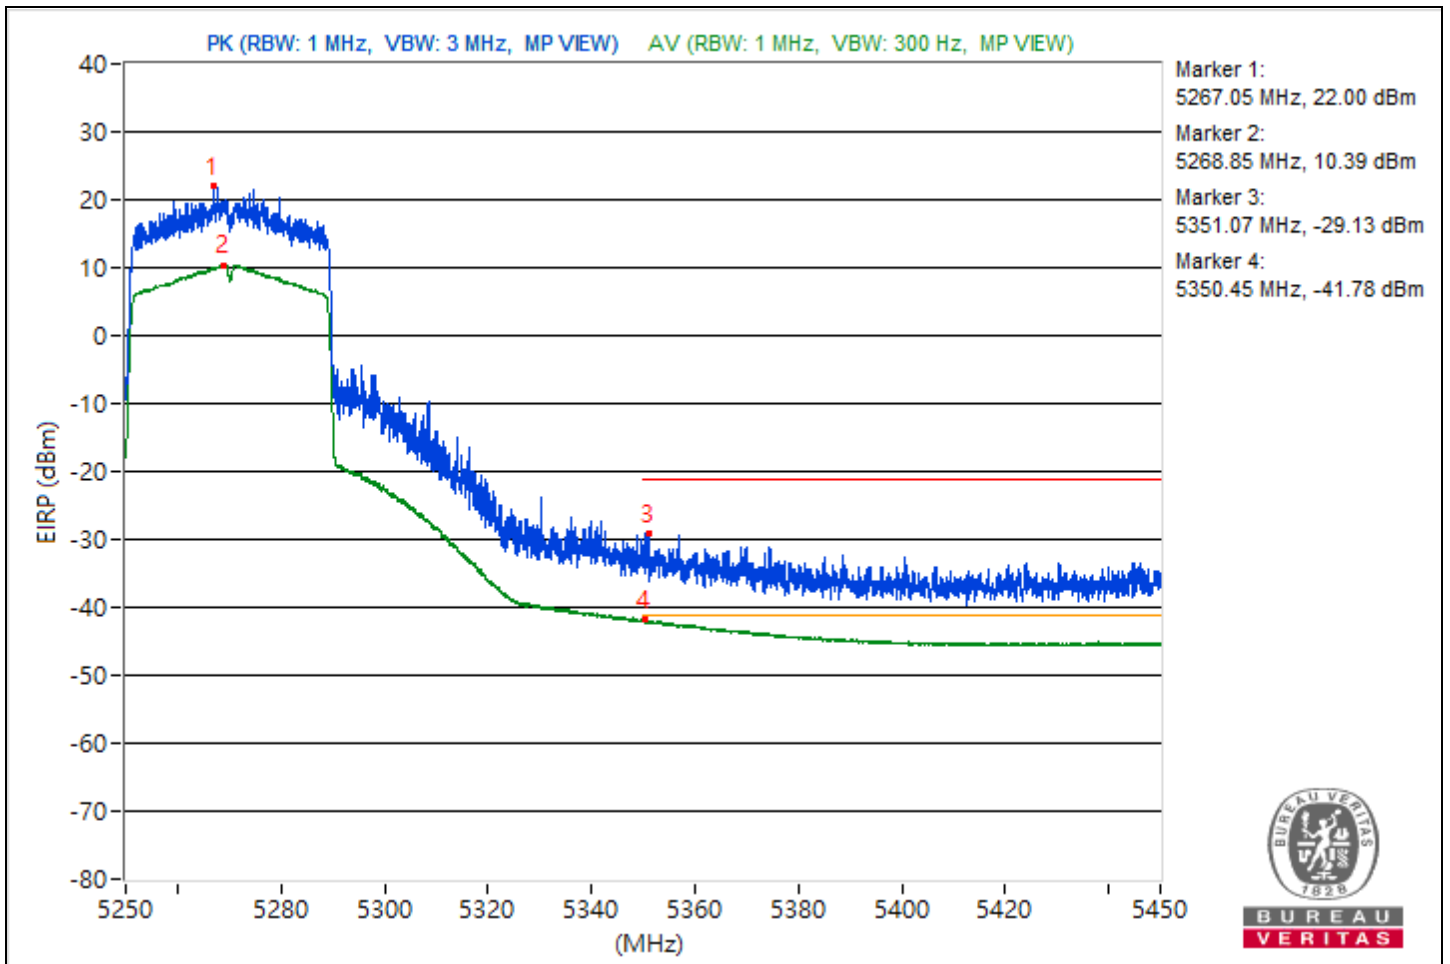


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5297.95	113.38 PK			13.2	4.92	18.12
2	*5309.05	103.22 AV			3.04	4.92	7.96
3	5352.87	62.41 PK	74	-11.59	-37.77	4.92	-32.85
4	5350.7	51.64 AV	54	-2.36	-48.54	4.92	-43.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

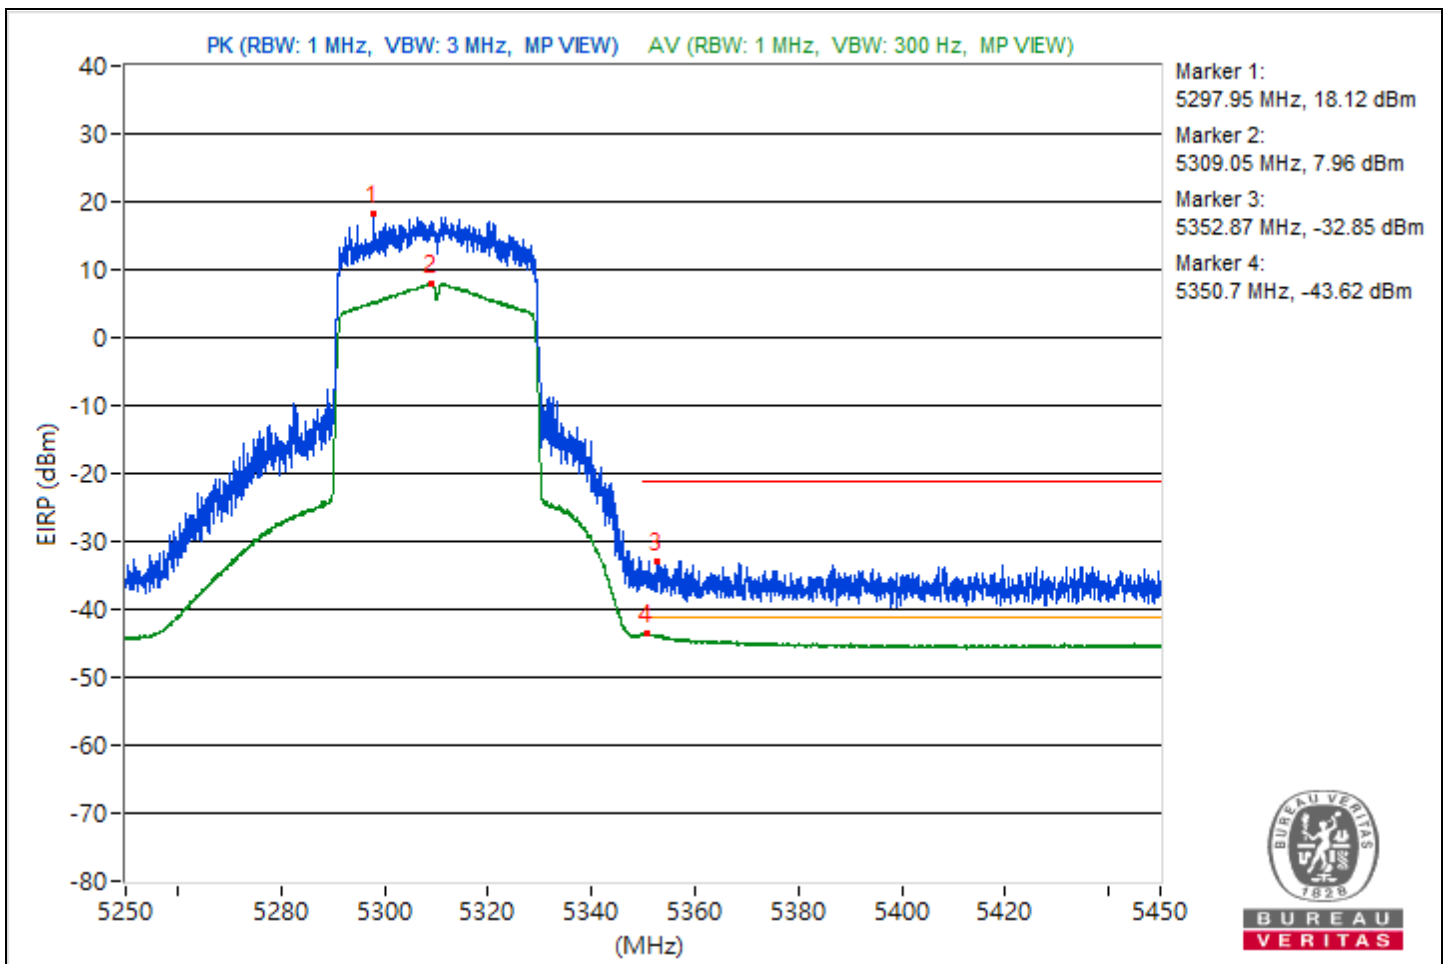


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5518.22	114.92 PK			14.74	4.92	19.66
2	5453.69	62.73 PK	74	-11.27	-37.45	4.92	-32.53
3	#5462.31	63.7 PK	68.26	-4.56	-36.48	4.92	-31.56
4	*5511.22	103.35 AV			3.17	4.92	8.09
5	5459.59	51.34 AV	54	-2.66	-48.84	4.92	-43.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

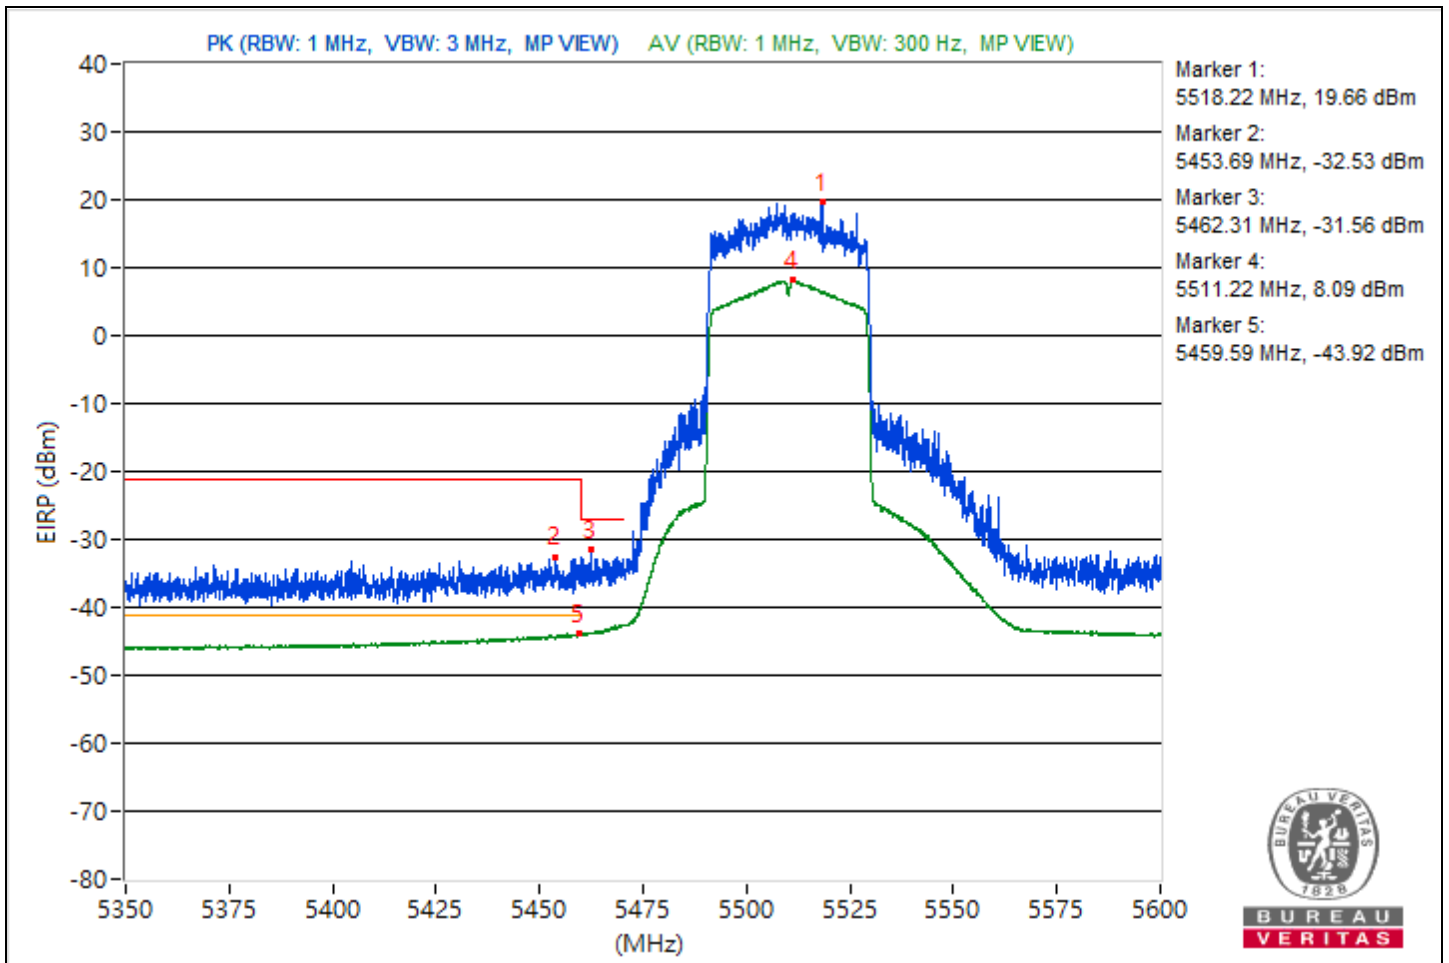


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5551.47	117.39 PK			17.21	4.92	22.13
2	5459	64.51 PK	74	-9.49	-35.67	4.92	-30.75
3	#5467.06	65.69 PK	68.26	-2.57	-34.49	4.92	-29.57
4	*5549.12	106.32 AV			6.14	4.92	11.06
5	5459.91	53.13 AV	54	-0.87	-47.05	4.92	-42.13

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

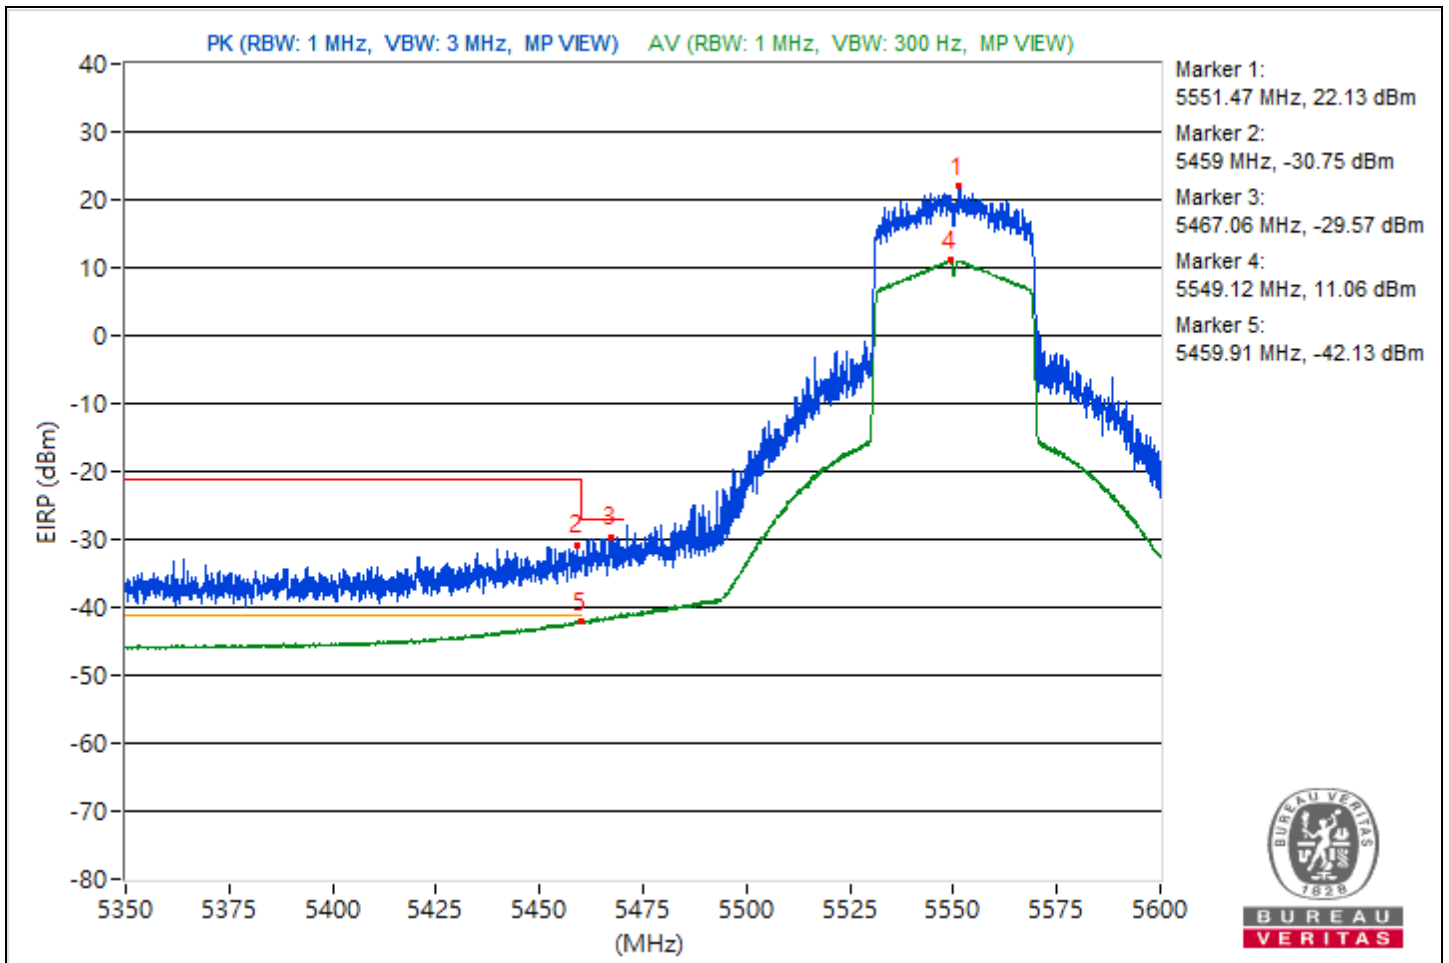

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5672.65	115.67			15.49	4.92	20.41
2	#5738.05	68.1	68.26	-0.16	-32.08	4.92	-27.16

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

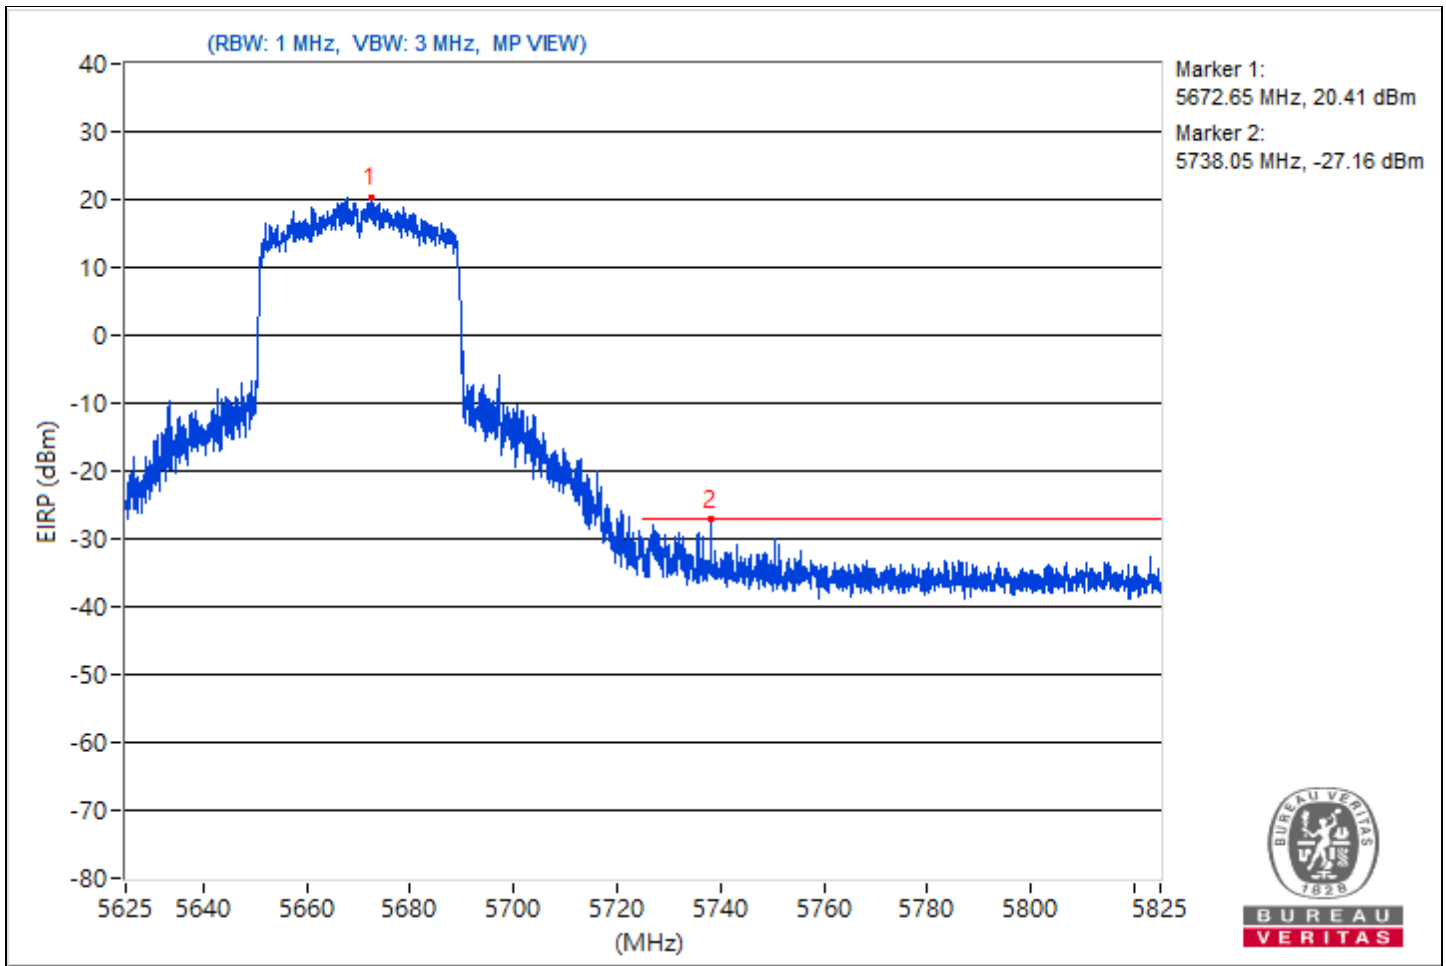


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.14	118.94			18.76	4.92	23.68
2	#5870.1	63	68.26	-5.26	-37.18	4.92	-32.26

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

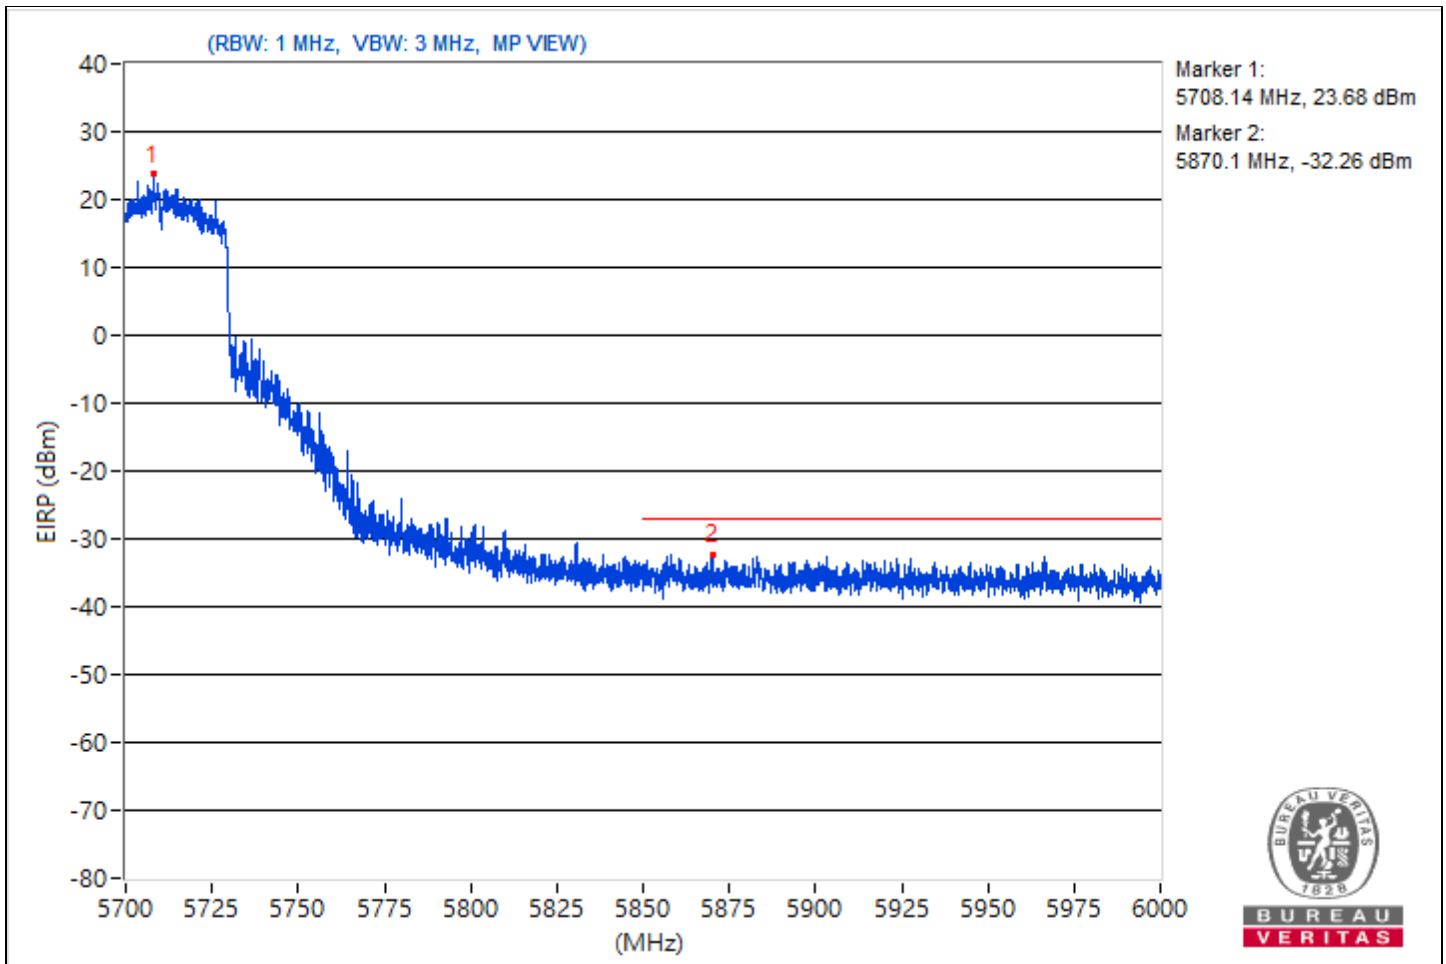


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5289.18	112.48 PK			12.3	4.92	17.22
2	*5288.68	100.61 AV			0.43	4.92	5.35
3	5354.52	65.54 PK	74	-8.46	-34.64	4.92	-29.72
4	5355.37	53.47 AV	54	-0.53	-46.71	4.92	-41.79

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

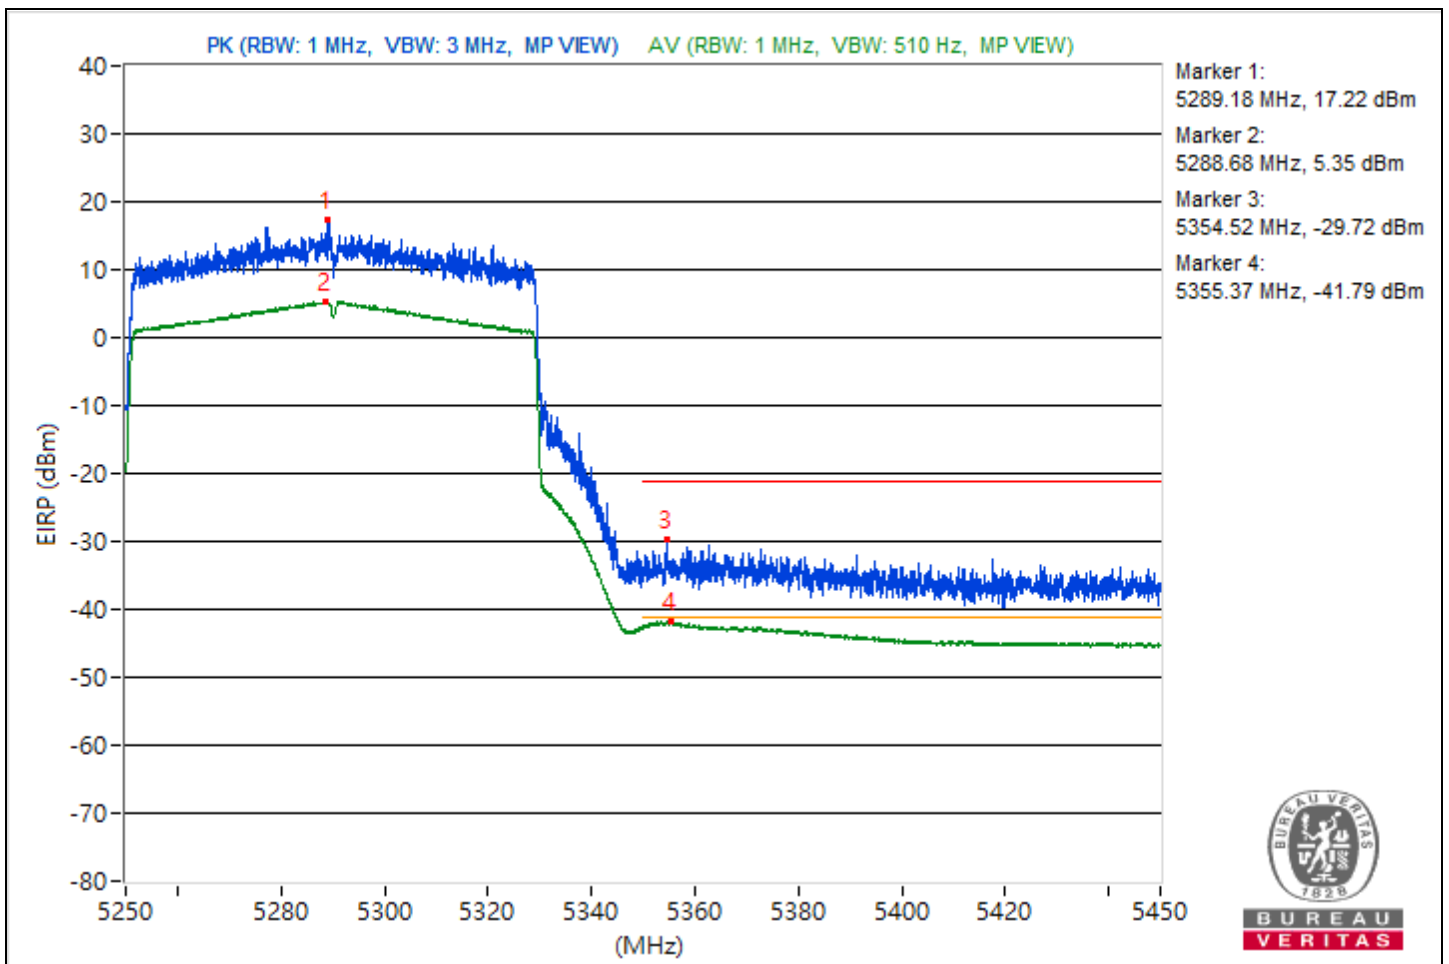


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5539.25	113.15 PK			12.97	4.92	17.89
2	5451.78	63.75 PK	74	-10.25	-36.43	4.92	-31.51
3	#5461.03	62.49 PK	68.26	-5.77	-37.69	4.92	-32.77
4	*5531.69	100.54 AV			0.36	4.92	5.28
5	5432.69	51.29 AV	54	-2.71	-48.89	4.92	-43.97

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

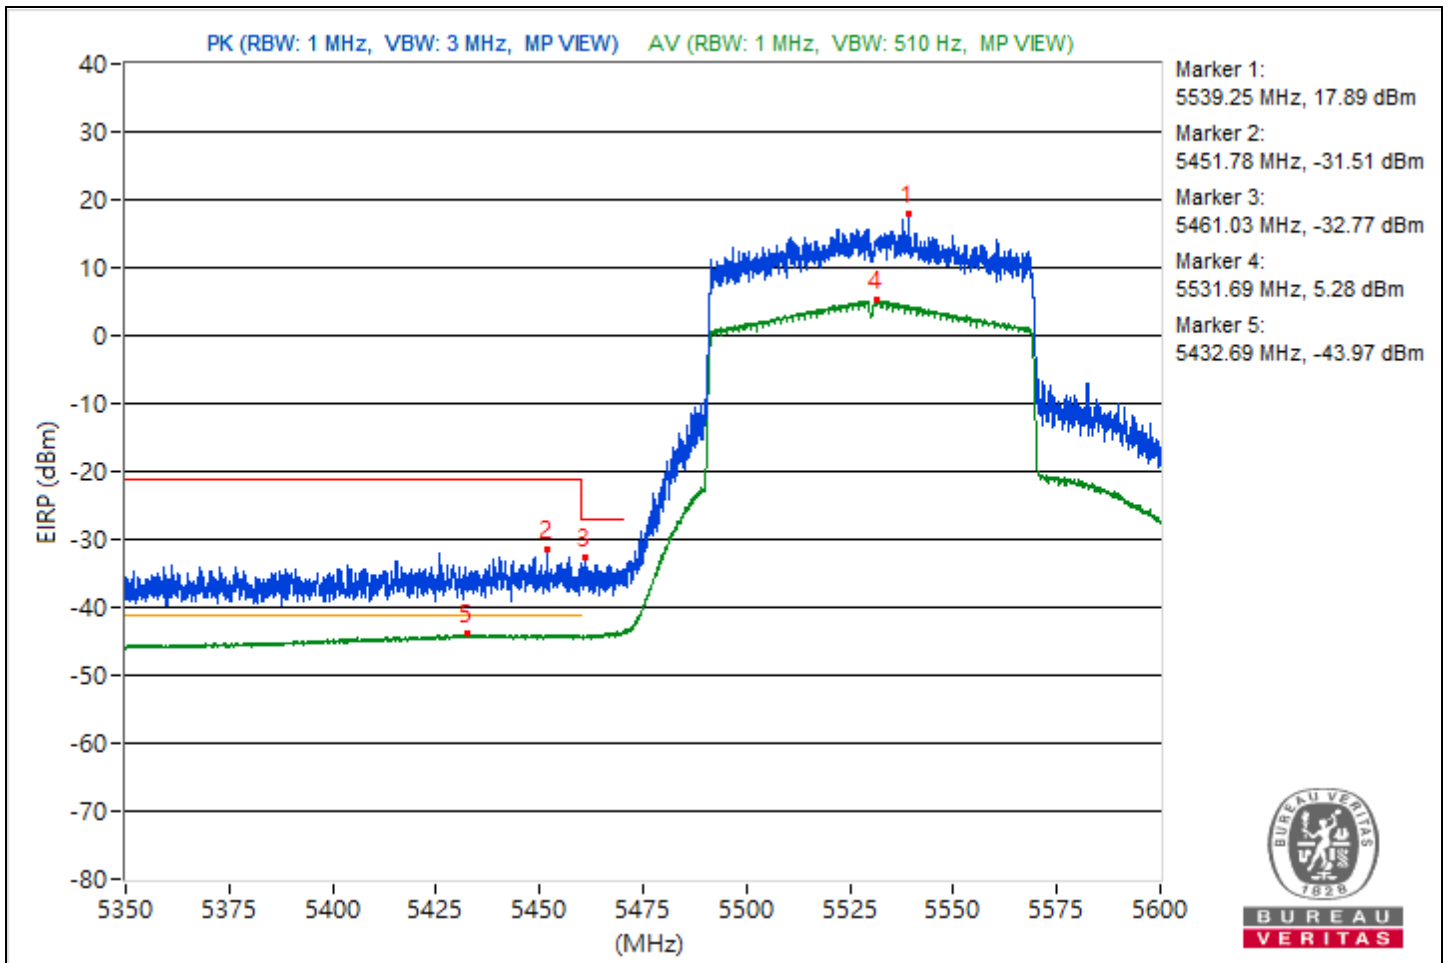


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5599.5	113.6 PK			13.42	4.92	18.34
2	5454.28	65.01 PK	74	-8.99	-35.17	4.92	-30.25
3	#5467.69	66.17 PK	68.26	-2.09	-34.01	4.92	-29.09
4	*5600	102.05 AV			1.87	4.92	6.79
5	5457.87	53.06 AV	54	-0.94	-47.12	4.92	-42.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

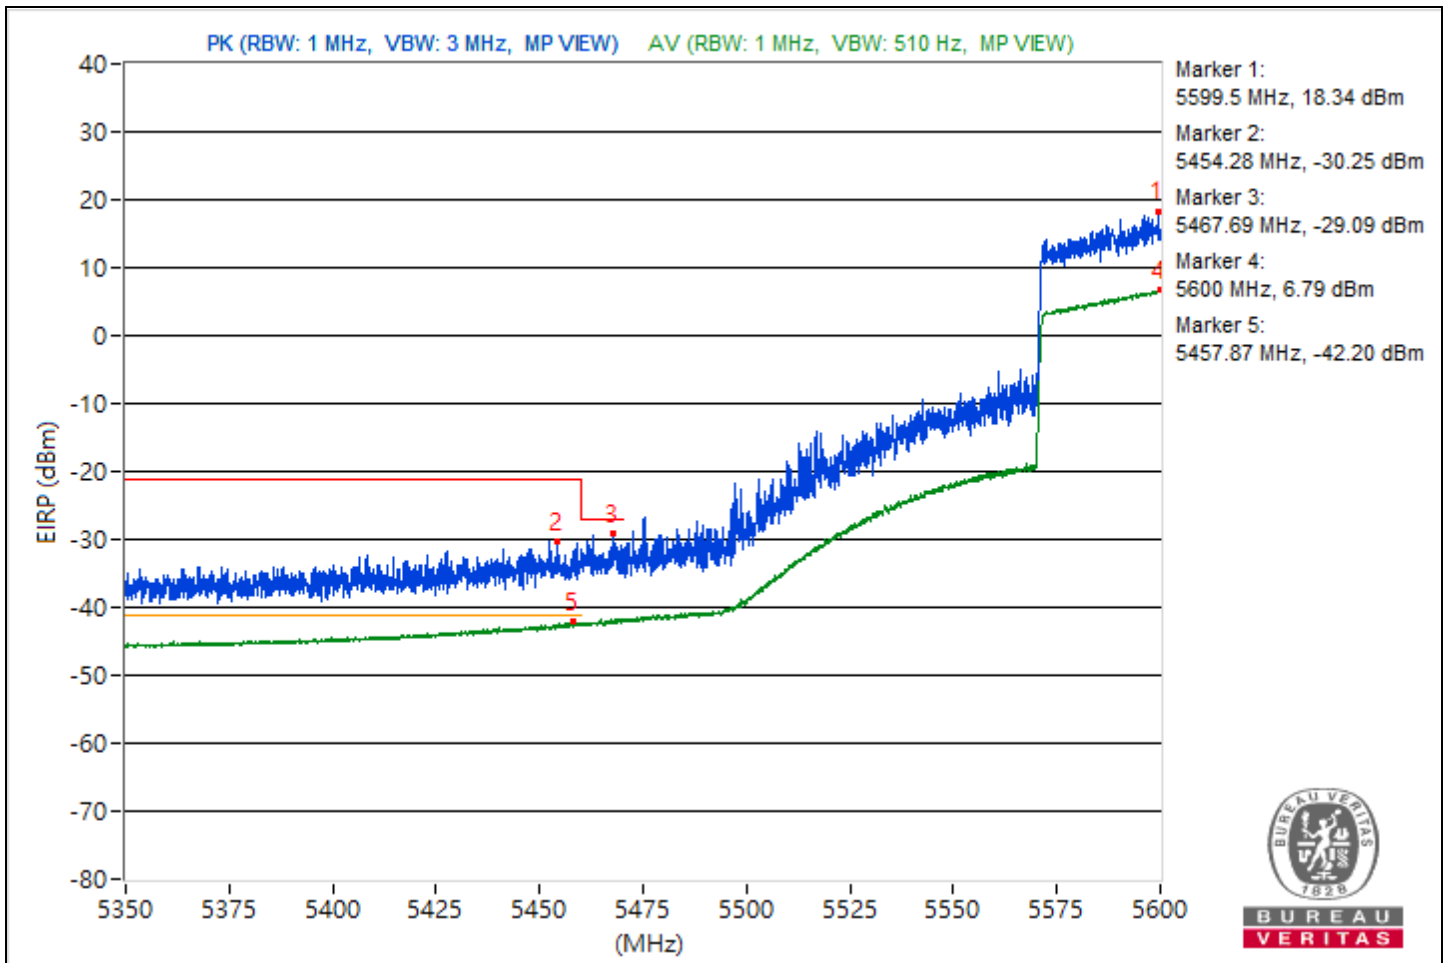


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5702.06	111.61			11.43	4.92	16.35
2	#5855.81	66.81	68.26	-1.45	-33.37	4.92	-28.45

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

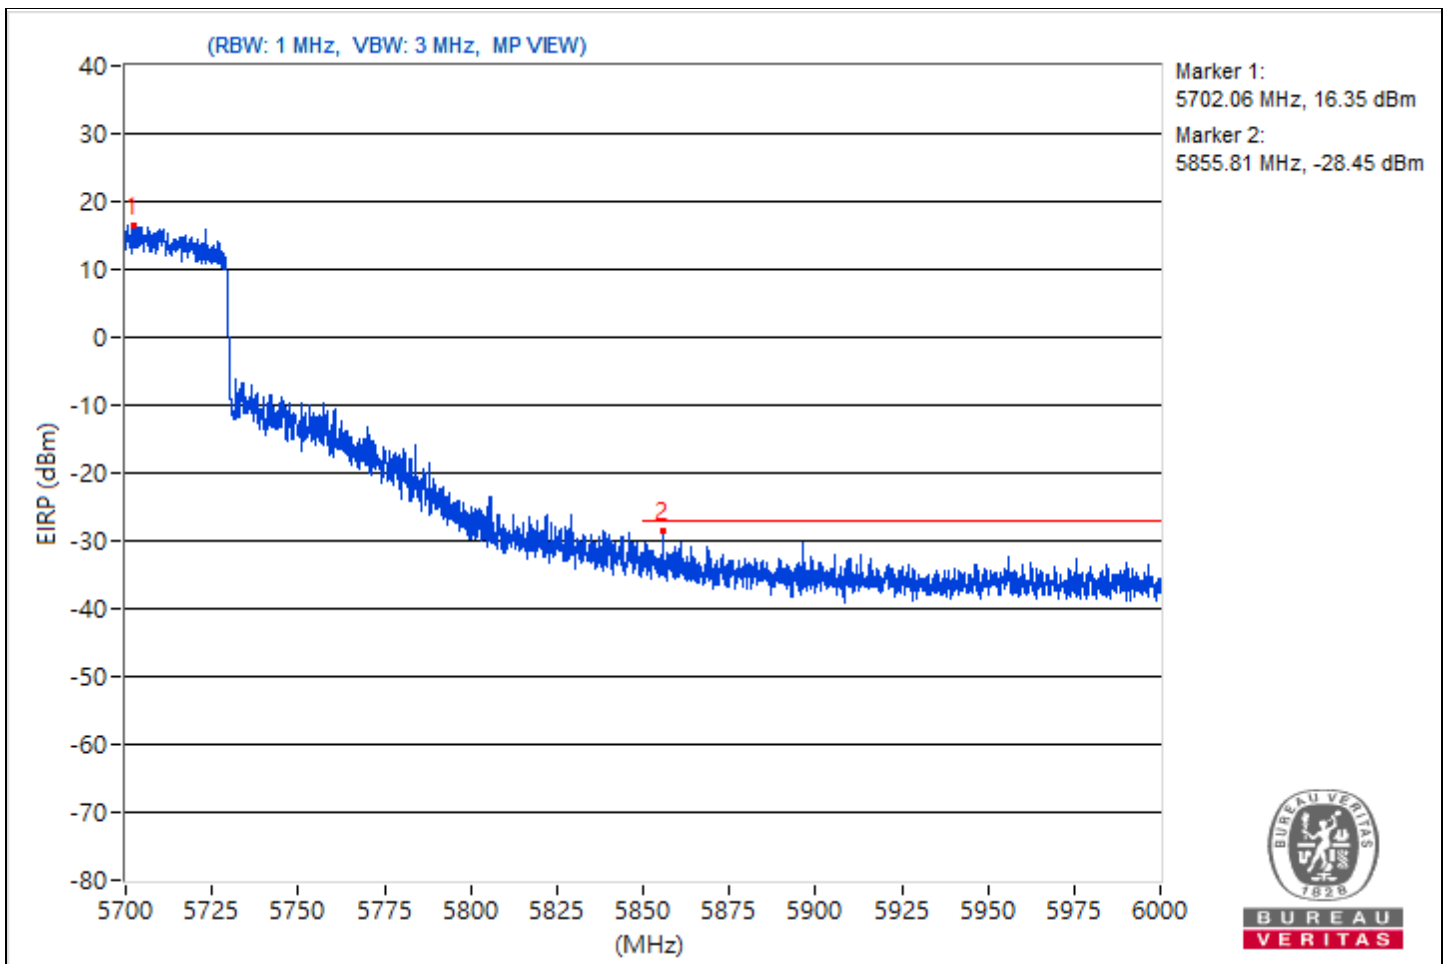


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5216.87	105.85 PK			5.67	4.92	10.59
2	*5247.07	94.4 AV			-5.78	4.92	-0.86
3	5112.9	65.2 PK	74	-8.8	-34.98	4.92	-30.06
4	5129.73	53.45 AV	54	-0.55	-46.73	4.92	-41.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

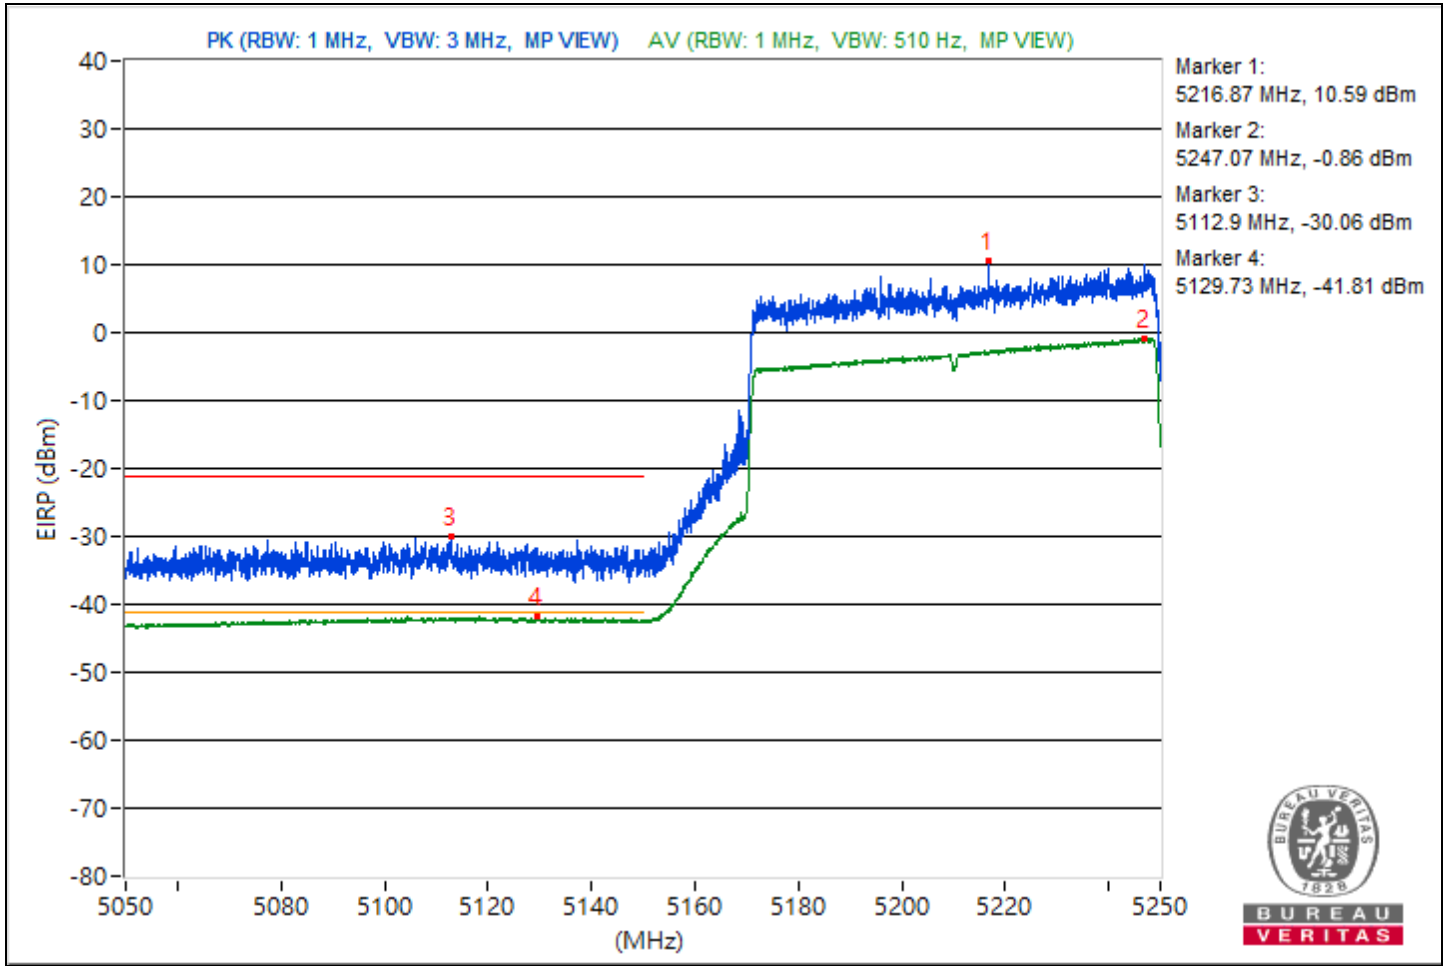


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.43	105.07 PK			4.89	4.92	9.81
2	*5252.5	94.45 AV			-5.73	4.92	-0.81
3	5418.93	65.18 PK	74	-8.82	-35	4.92	-30.08
4	5378.2	52.79 AV	54	-1.21	-47.39	4.92	-42.47

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

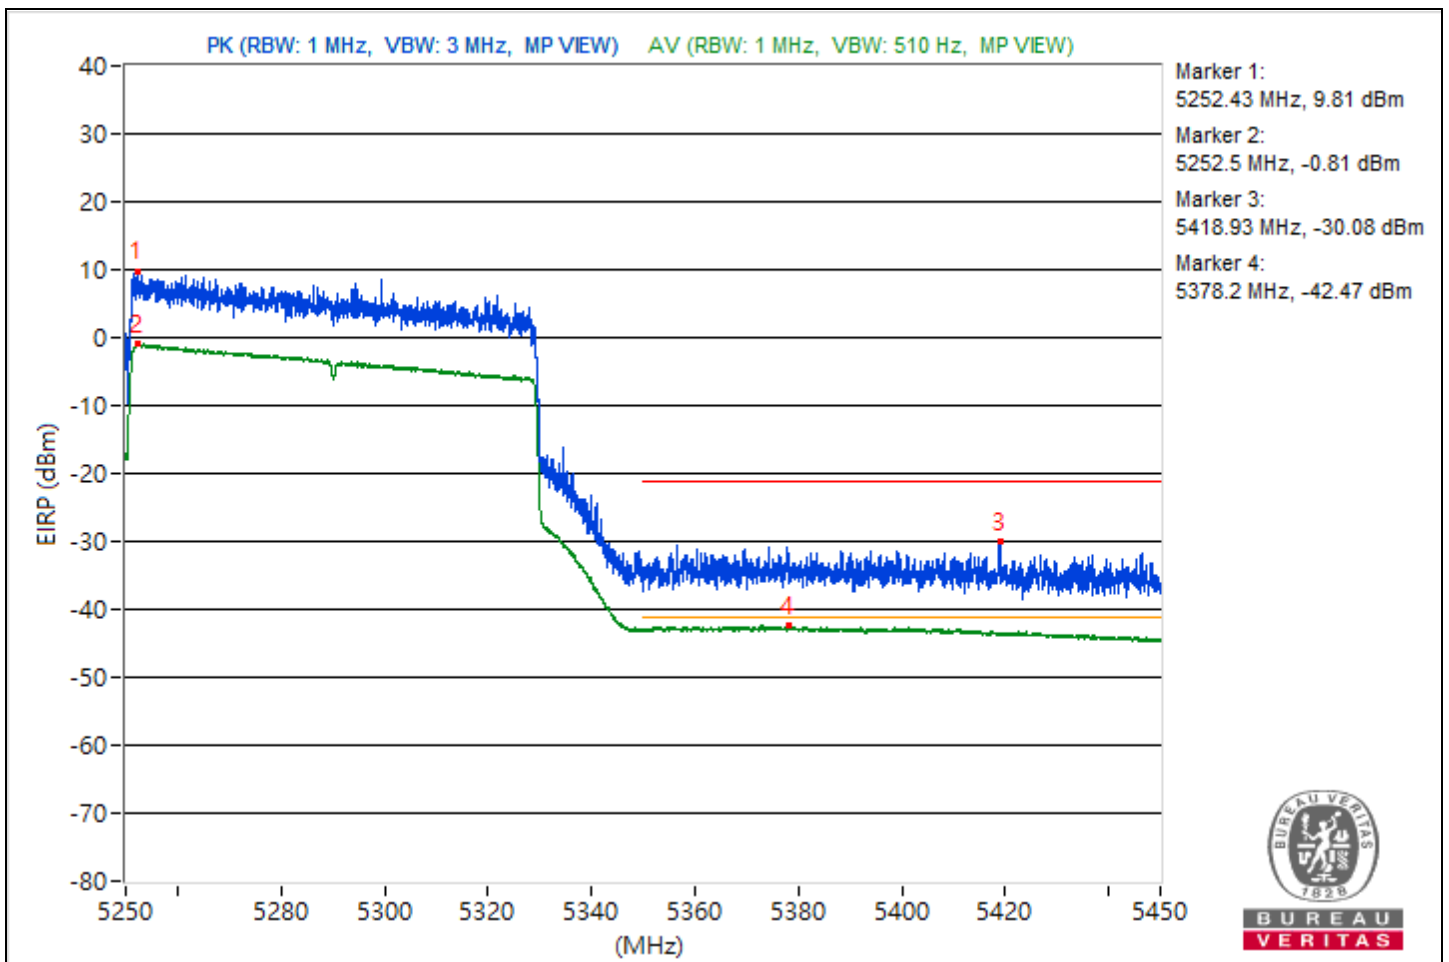


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 60% RH
Tested By	Willy Lin		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5573	108.57 PK			8.39	4.92	13.31
2	5429.41	63.72 PK	74	-10.28	-36.46	4.92	-31.54
3	#5465.41	63.84 PK	68.26	-4.42	-36.34	4.92	-31.42
4	*5565.75	95.68 AV			-4.5	4.92	0.42
5	5454.12	52.05 AV	54	-1.95	-48.13	4.92	-43.21

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

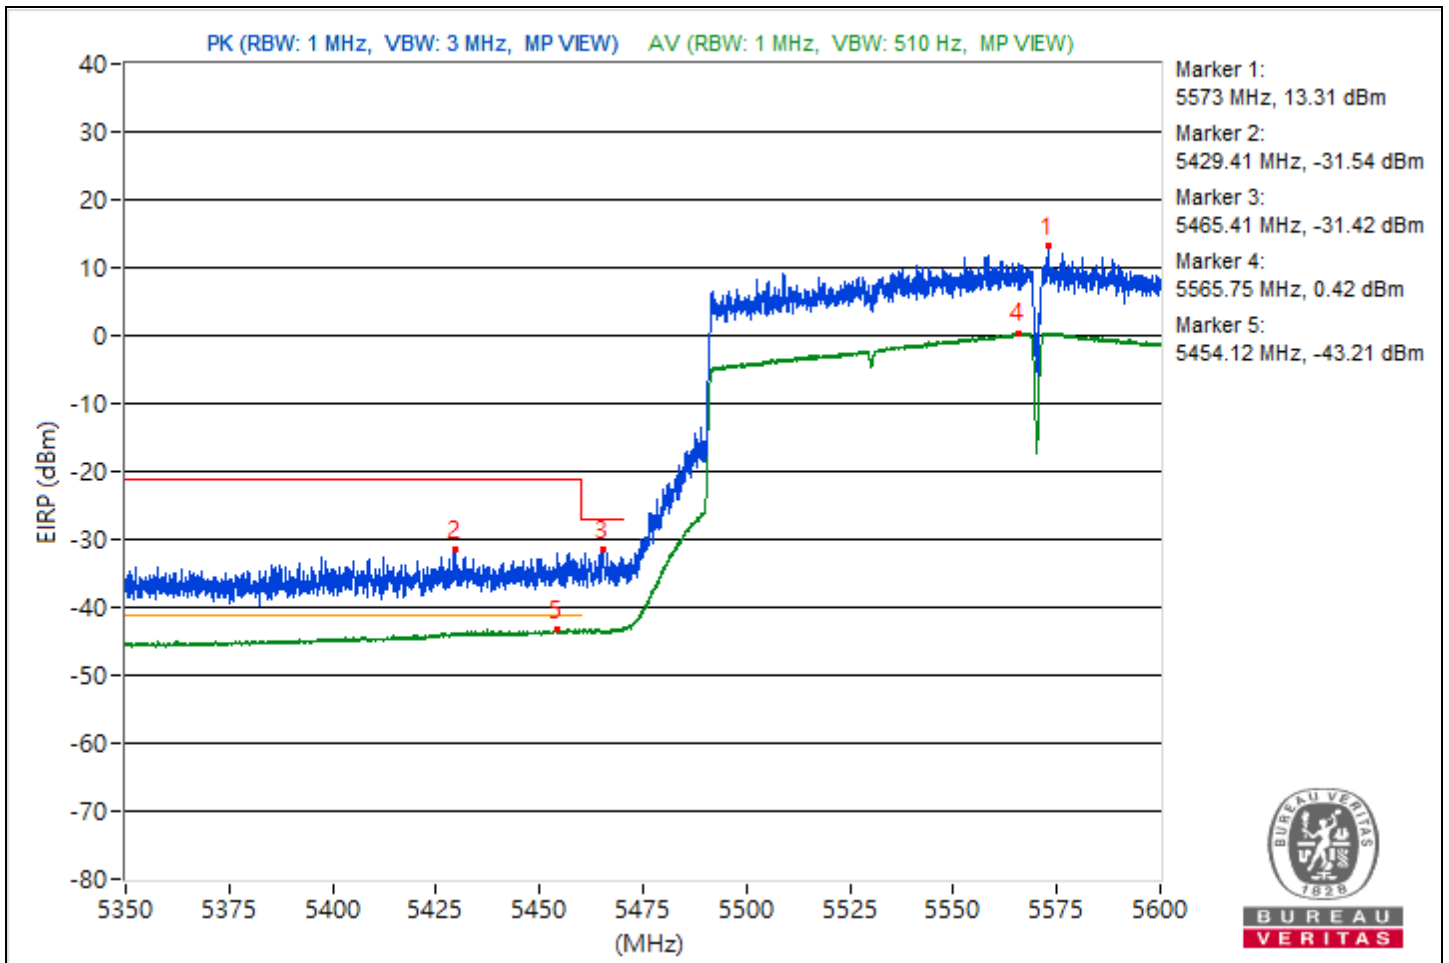


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.7	119.44 PK			19.26	4.92	24.18
2	*5328.95	109.44 AV			9.26	4.92	14.18
3	5377.75	63.74 PK	74	-10.26	-36.44	4.92	-31.52
4	5354.52	43.19 AV	54	-10.81	-56.99	4.92	-52.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

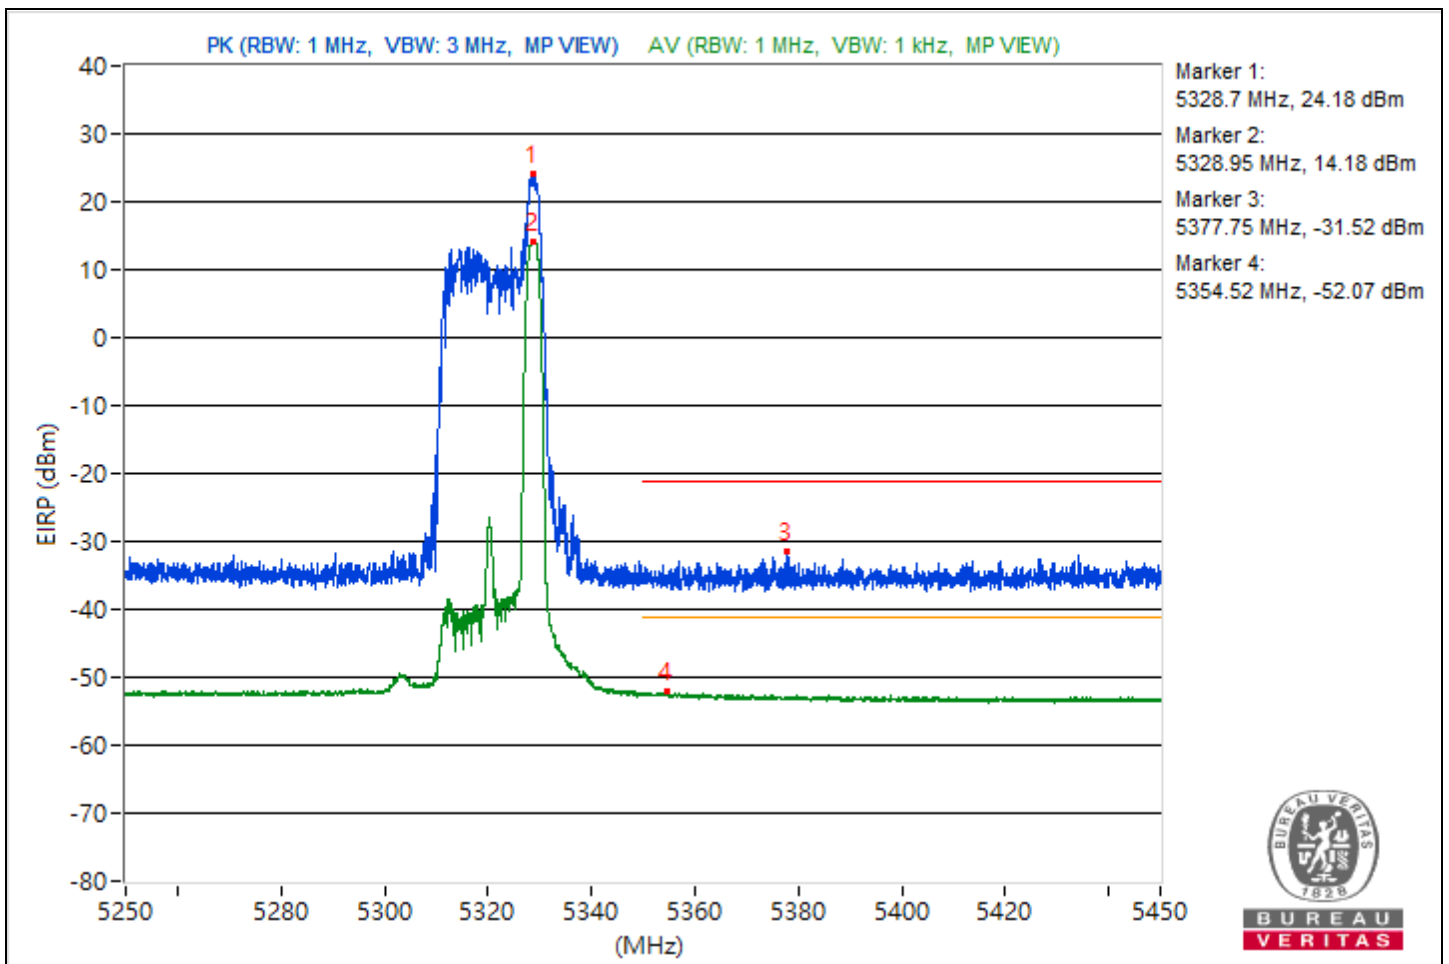


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5491.37	120.45 PK			20.27	4.92	25.19
2	5418.56	63.37 PK	74	-10.63	-36.81	4.92	-31.89
3	#5465.47	62.94 PK	68.26	-5.32	-37.24	4.92	-32.32
4	*5492.06	109.65 AV			9.47	4.92	14.39
5	5459.69	43.24 AV	54	-10.76	-56.94	4.92	-52.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

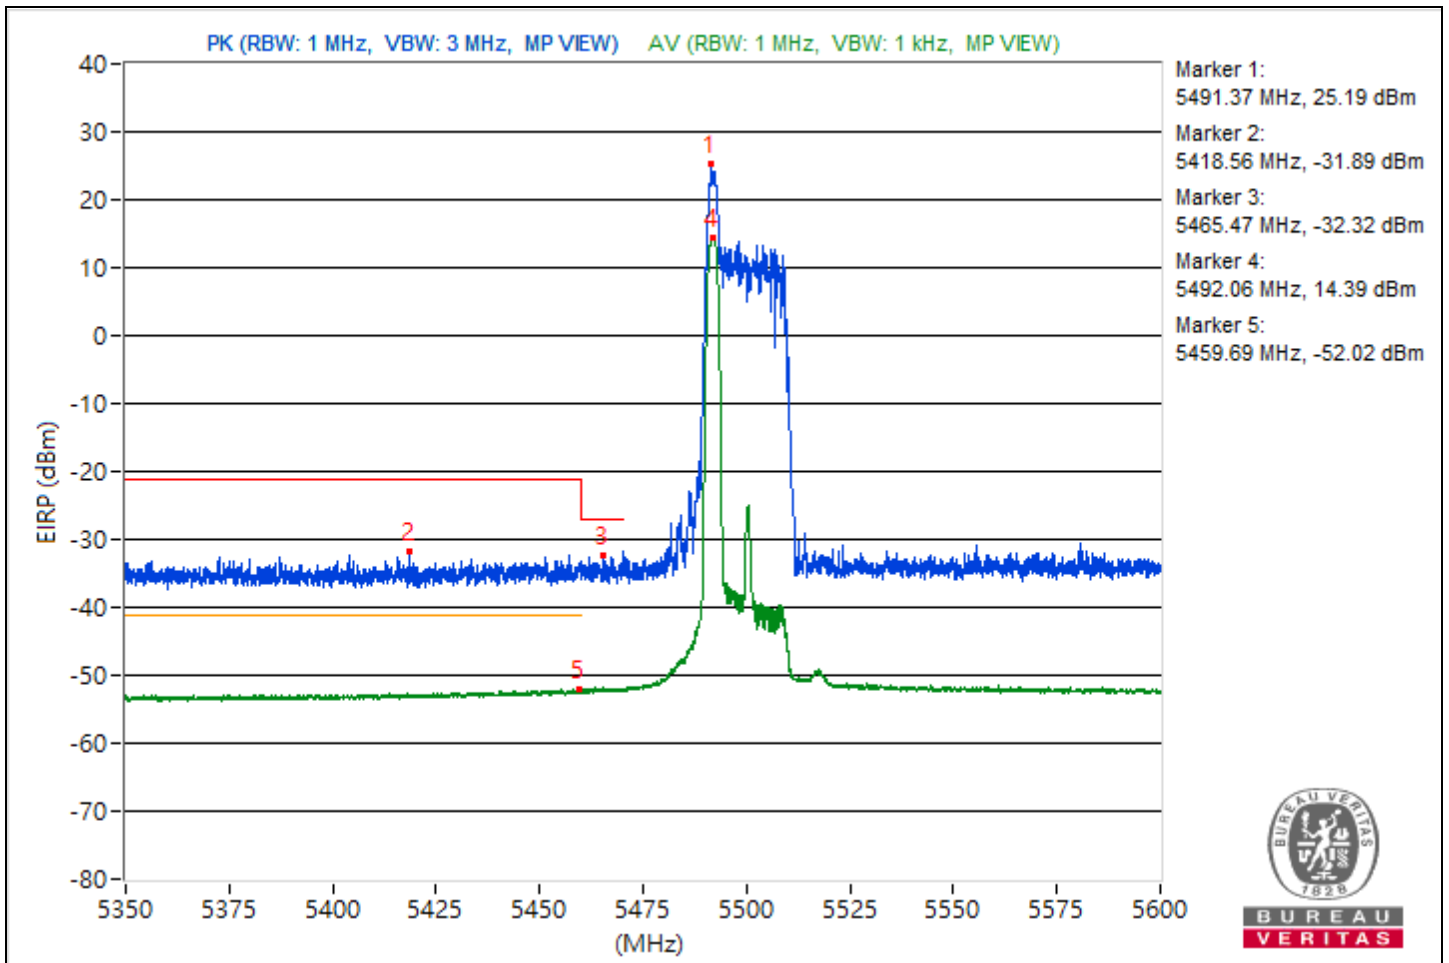


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.43	120.18			20	4.92	24.92
2	#5809.18	63.95	68.26	-4.31	-36.23	4.92	-31.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

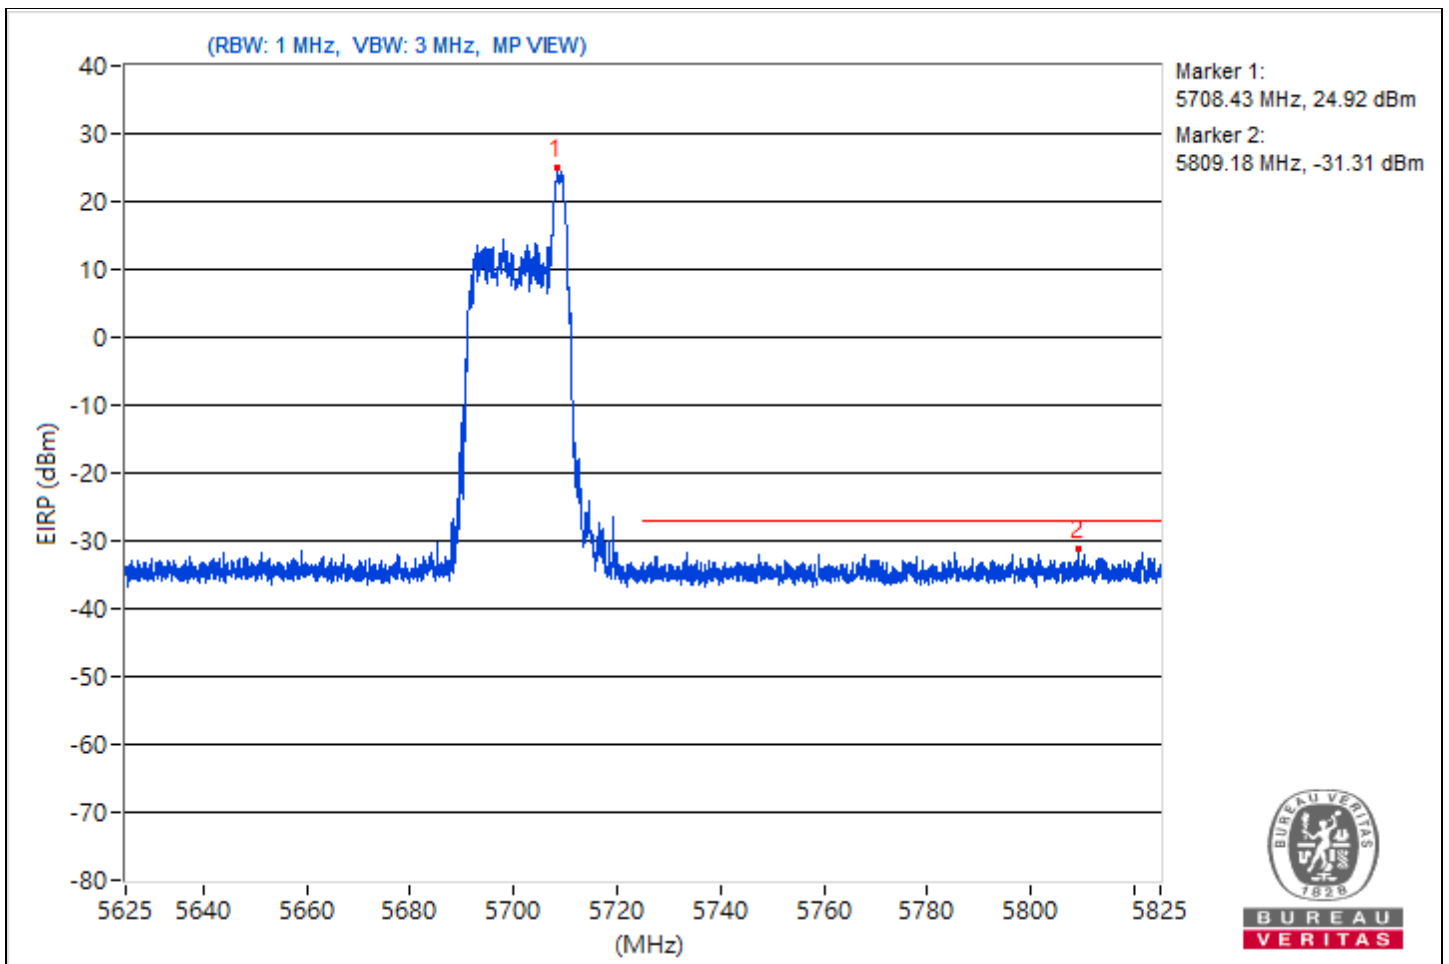


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.54	119.49			19.31	4.92	24.23
2	#5939.93	64.33	68.26	-3.93	-35.85	4.92	-30.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

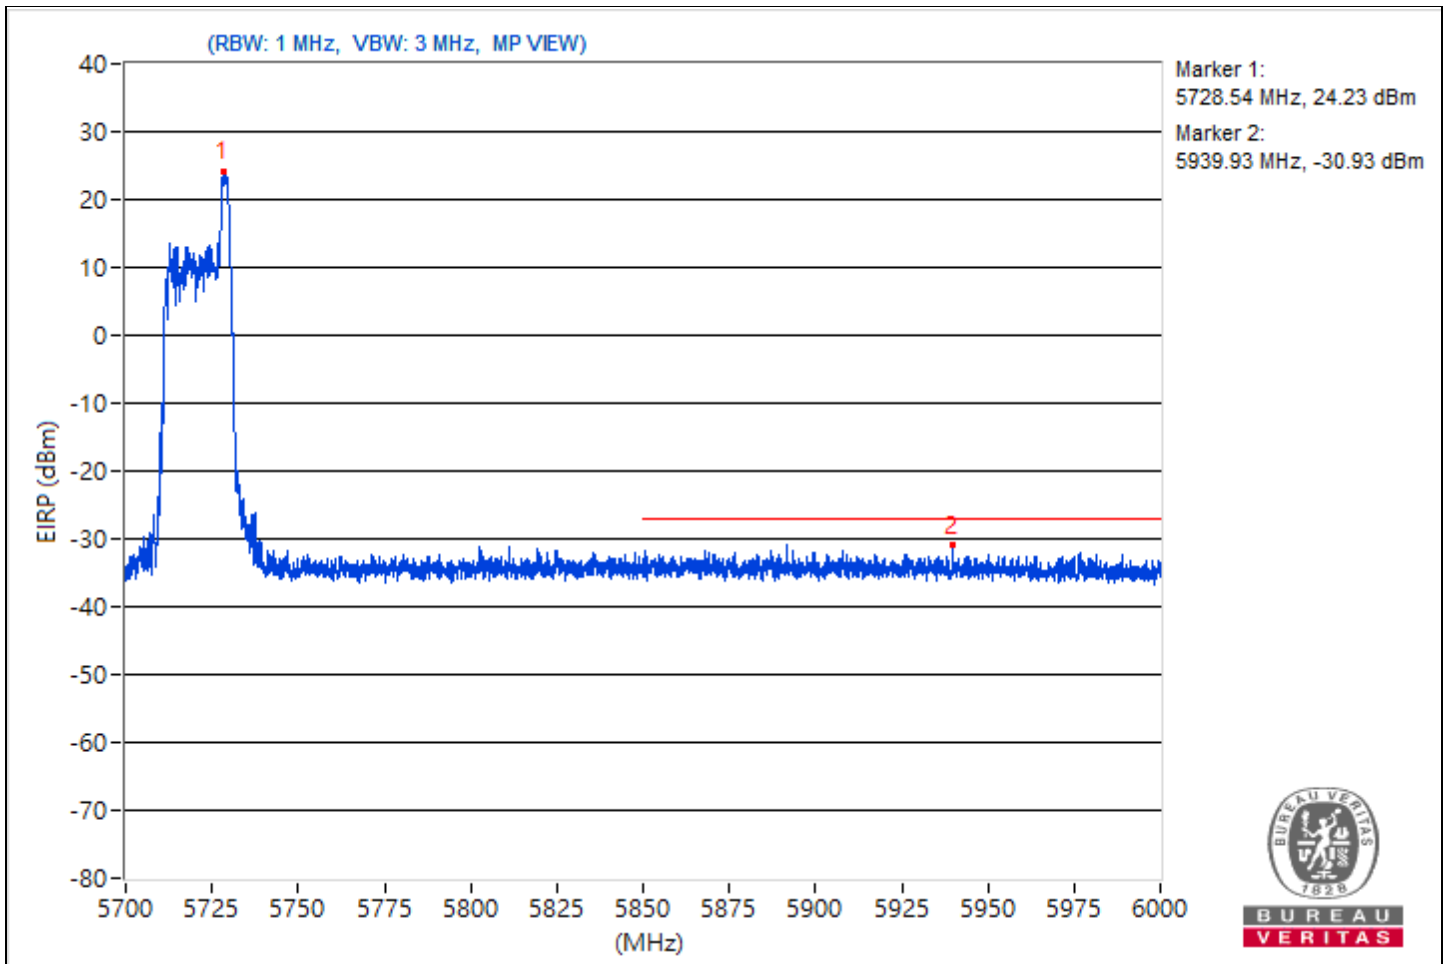


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5327.85	120.53 PK			20.35	4.92	25.27
2	*5327.55	109.67 AV			9.49	4.92	14.41
3	5387.68	64.24 PK	74	-9.76	-35.94	4.92	-31.02
4	5350.48	44.39 AV	54	-9.61	-55.79	4.92	-50.87

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

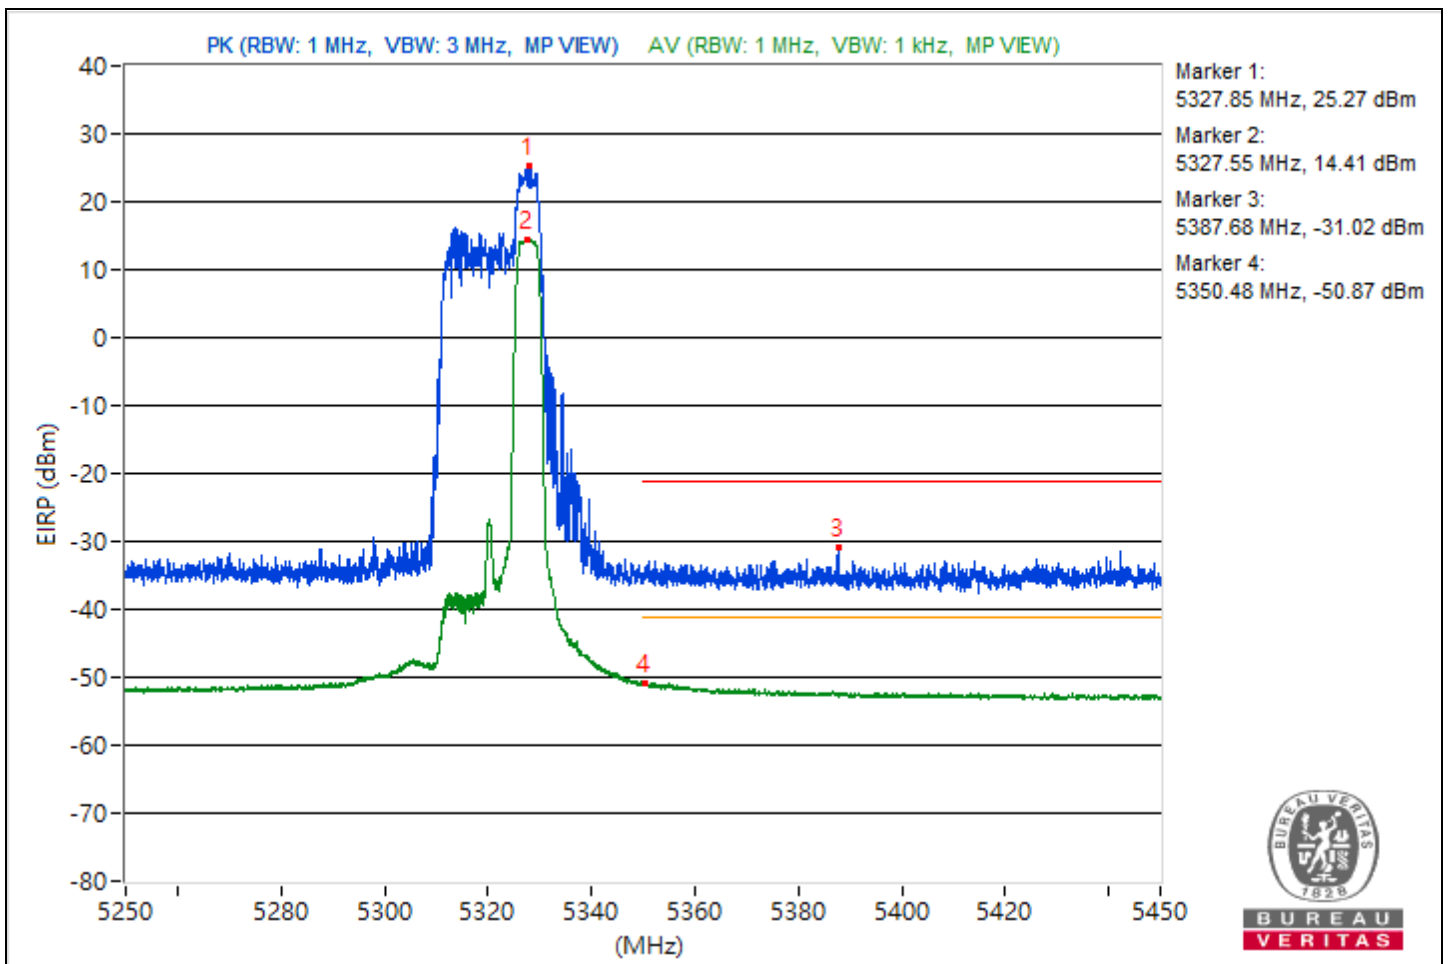




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5494.37	120.95 PK			20.77	4.92	25.69
2	5446.12	63.76 PK	74	-10.24	-36.42	4.92	-31.5
3	#5468.81	63.86 PK	68.26	-4.4	-36.32	4.92	-31.4
4	*5493.25	109.79 AV			9.61	4.92	14.53
5	5459.22	44.07 AV	54	-9.93	-56.11	4.92	-51.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

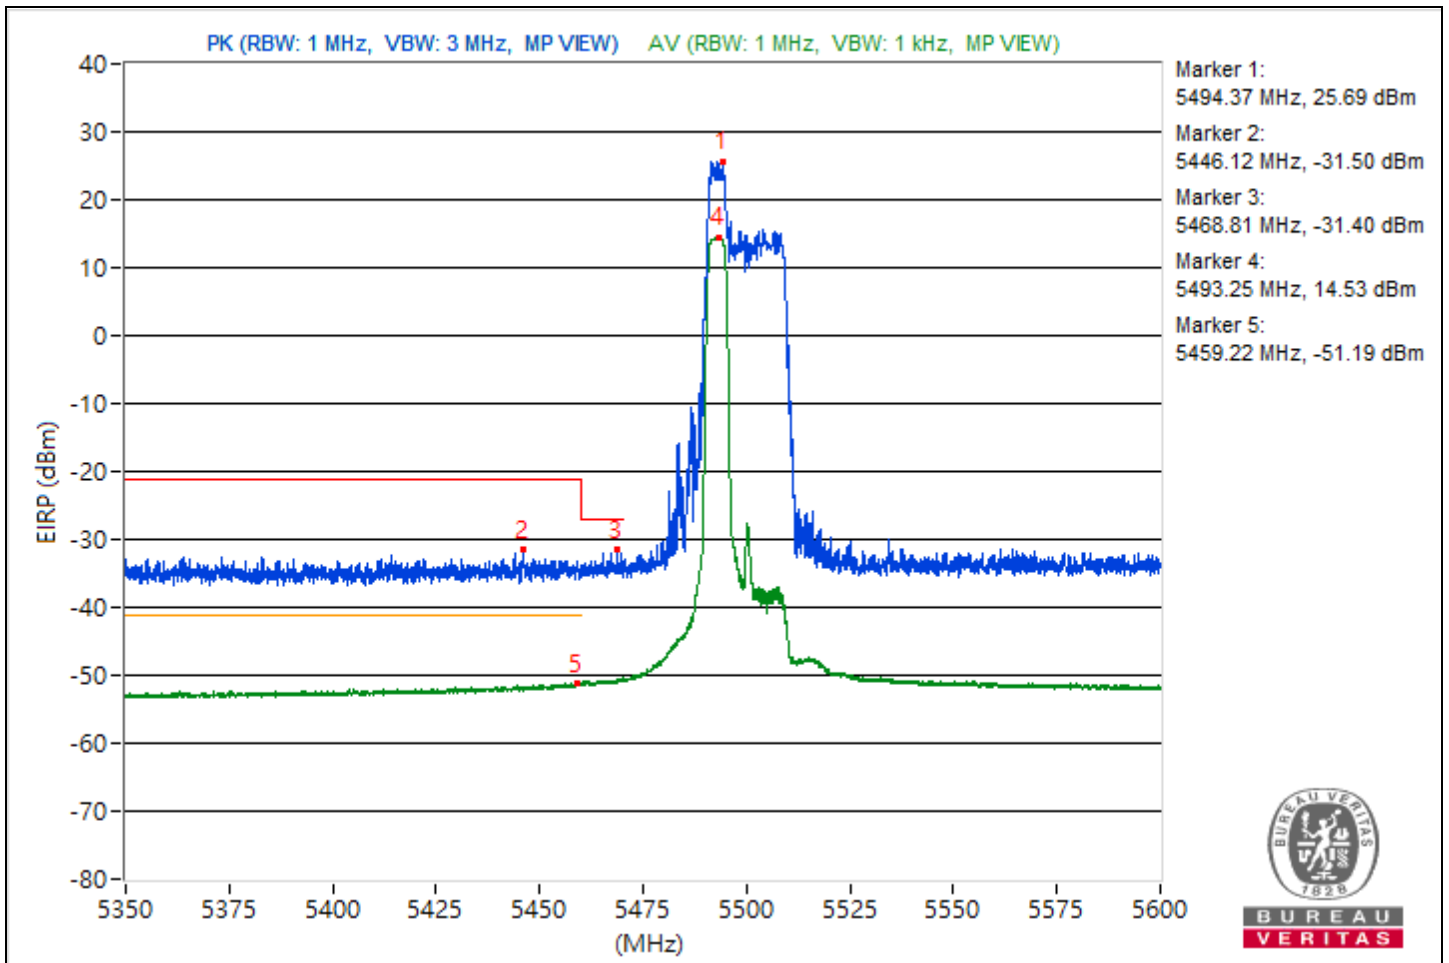


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5707.25	120.71			20.53	4.92	25.45
2	#5742.4	63.89	68.26	-4.37	-36.29	4.92	-31.37

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

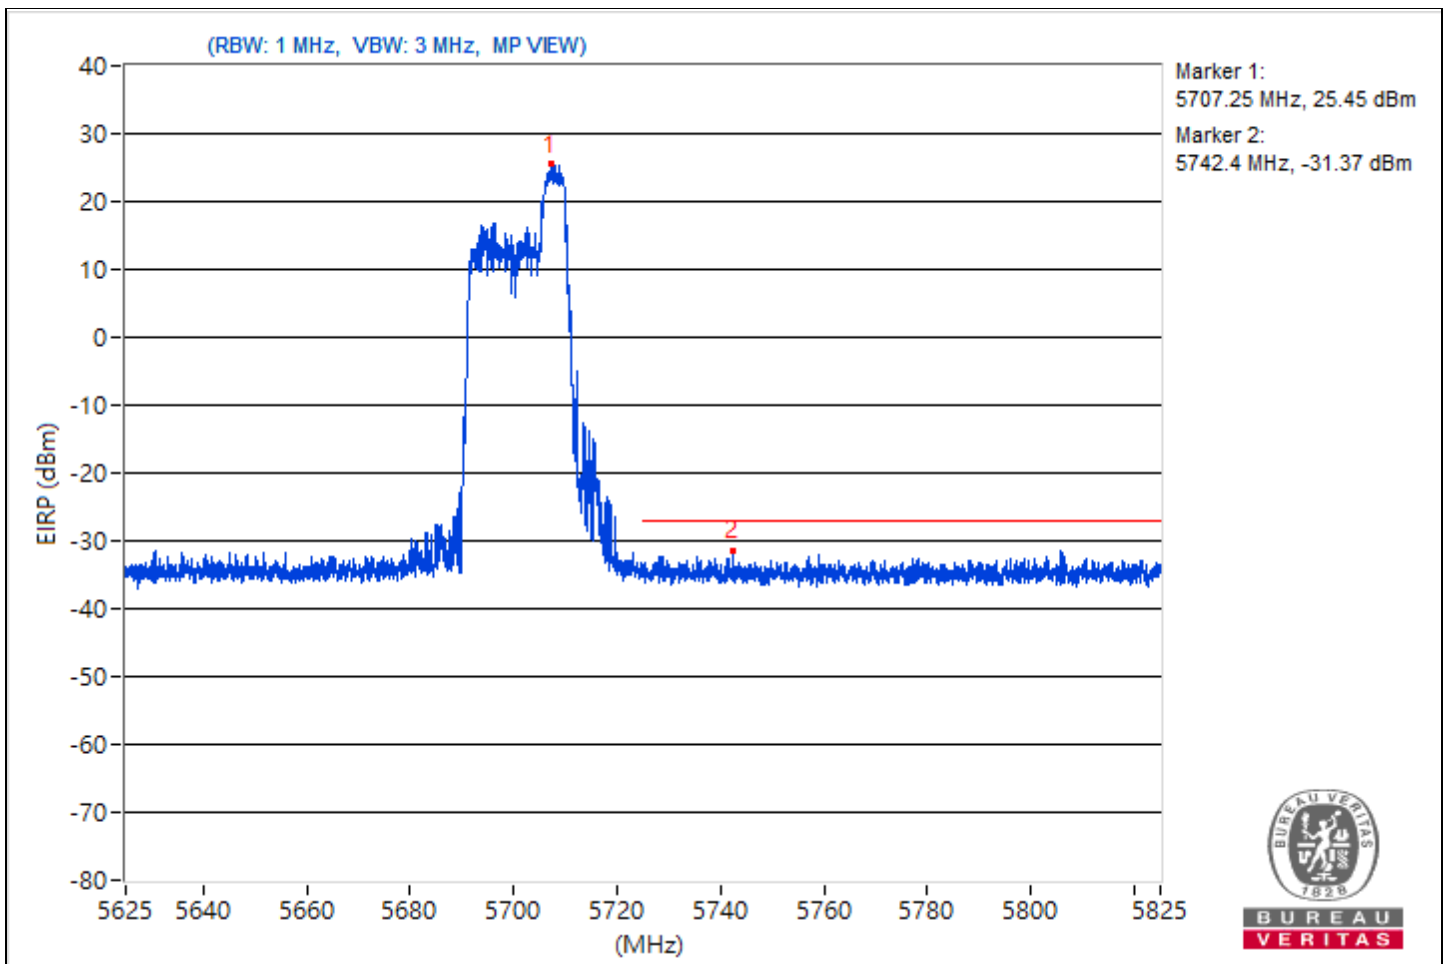


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5726.85	121.01			20.83	4.92	25.75
2	#5852.93	64.49	68.26	-3.77	-35.69	4.92	-30.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

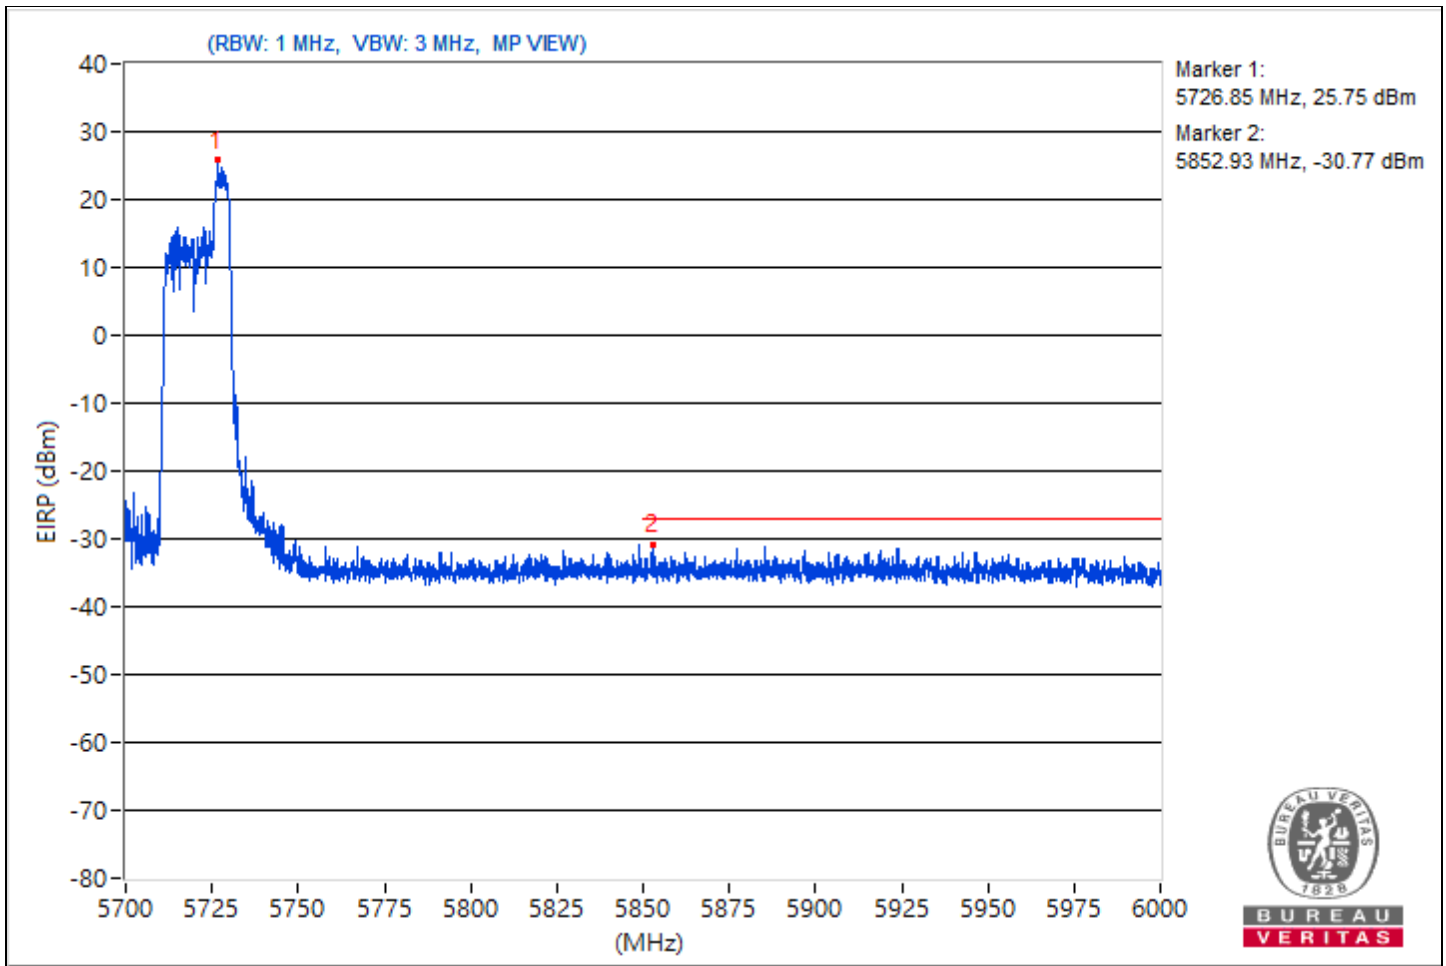


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5322.98	121.29 PK			21.11	4.92	26.03
2	*5323.6	109.8 AV			9.62	4.92	14.54
3	5350.43	70.6 PK	74	-3.4	-29.58	4.92	-24.66
4	5350.48	49.75 AV	54	-4.25	-50.43	4.92	-45.51

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

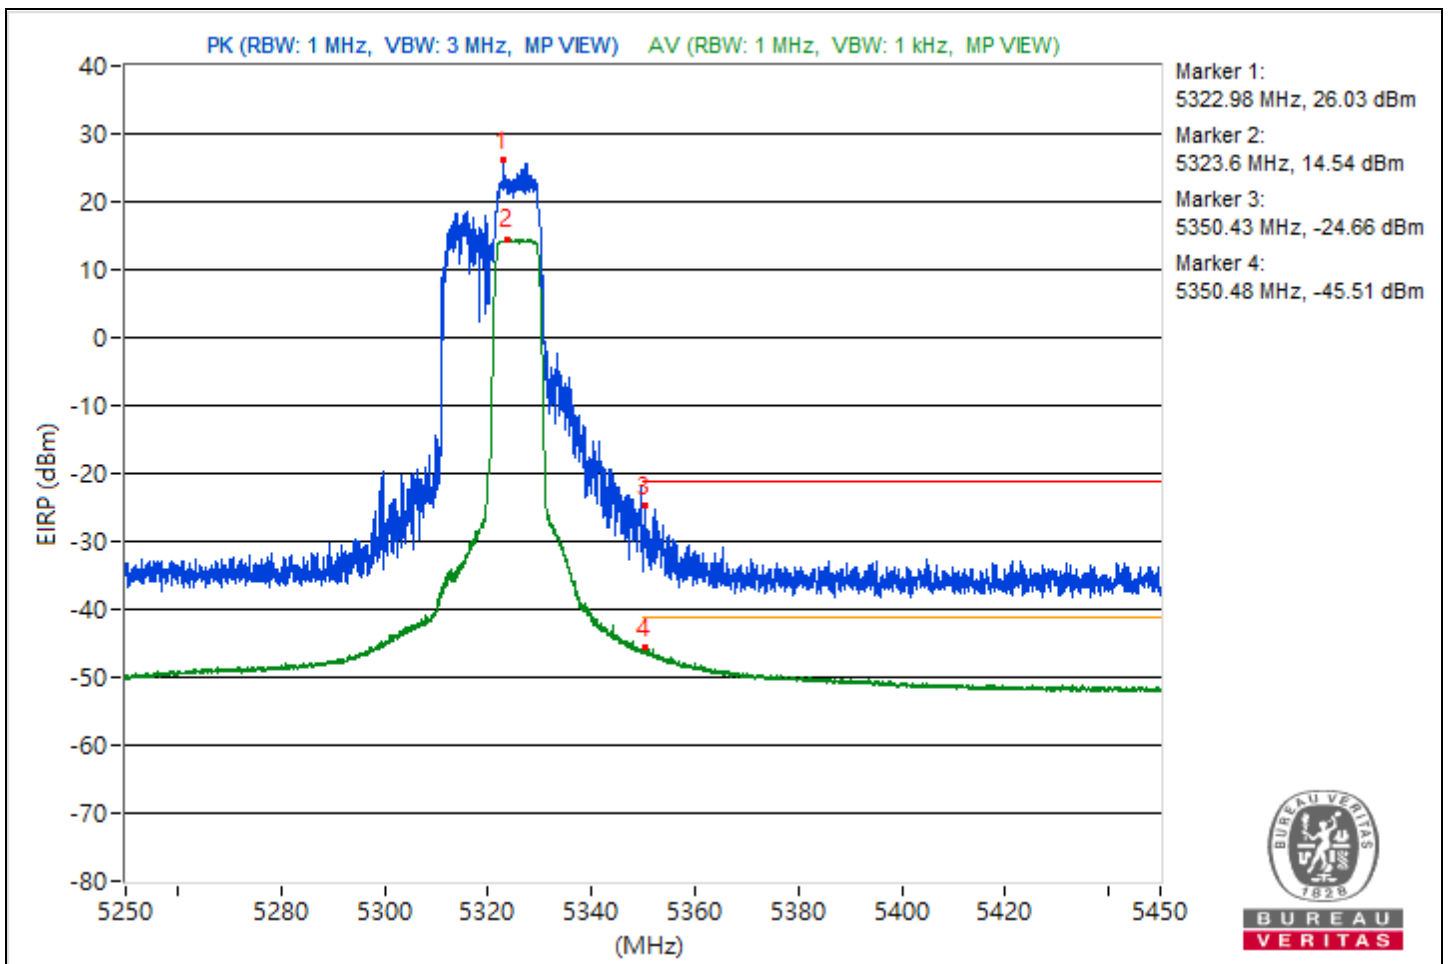




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5491.25	121.1 PK			20.92	4.92	25.84
2	5454.34	64.58 PK	74	-9.42	-35.6	4.92	-30.68
3	#5468.12	67.41 PK	68.26	-0.85	-32.77	4.92	-27.85
4	*5491.84	109.1 AV			8.92	4.92	13.84
5	5459.53	46.72 AV	54	-7.28	-53.46	4.92	-48.54

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

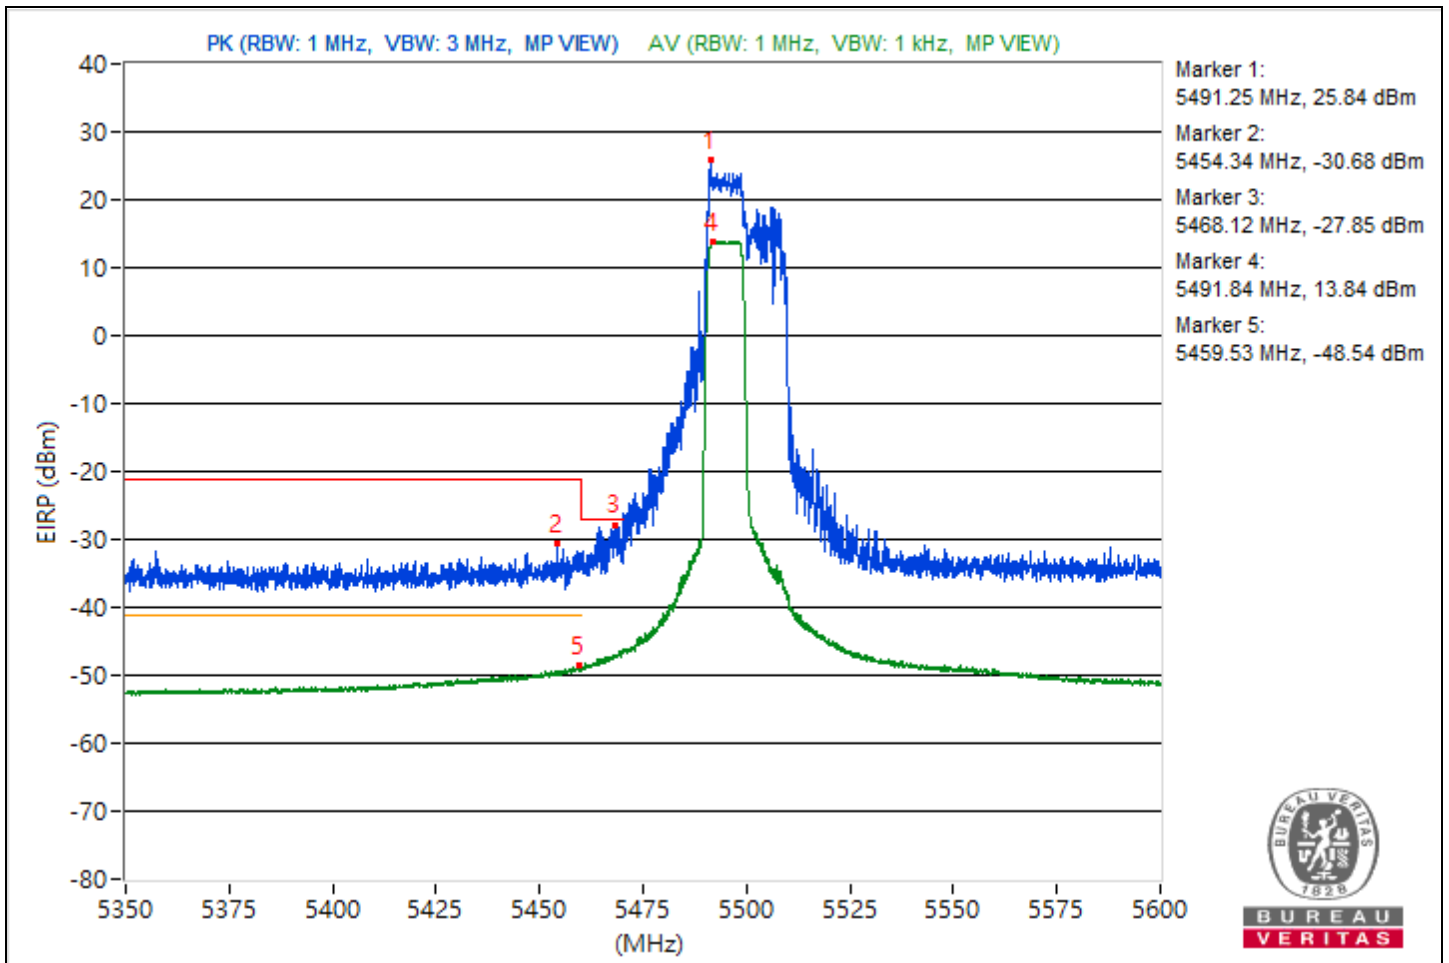


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5707.2	119.27			19.09	4.92	24.01
2	#5726.73	67.06	68.26	-1.2	-33.12	4.92	-28.2

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

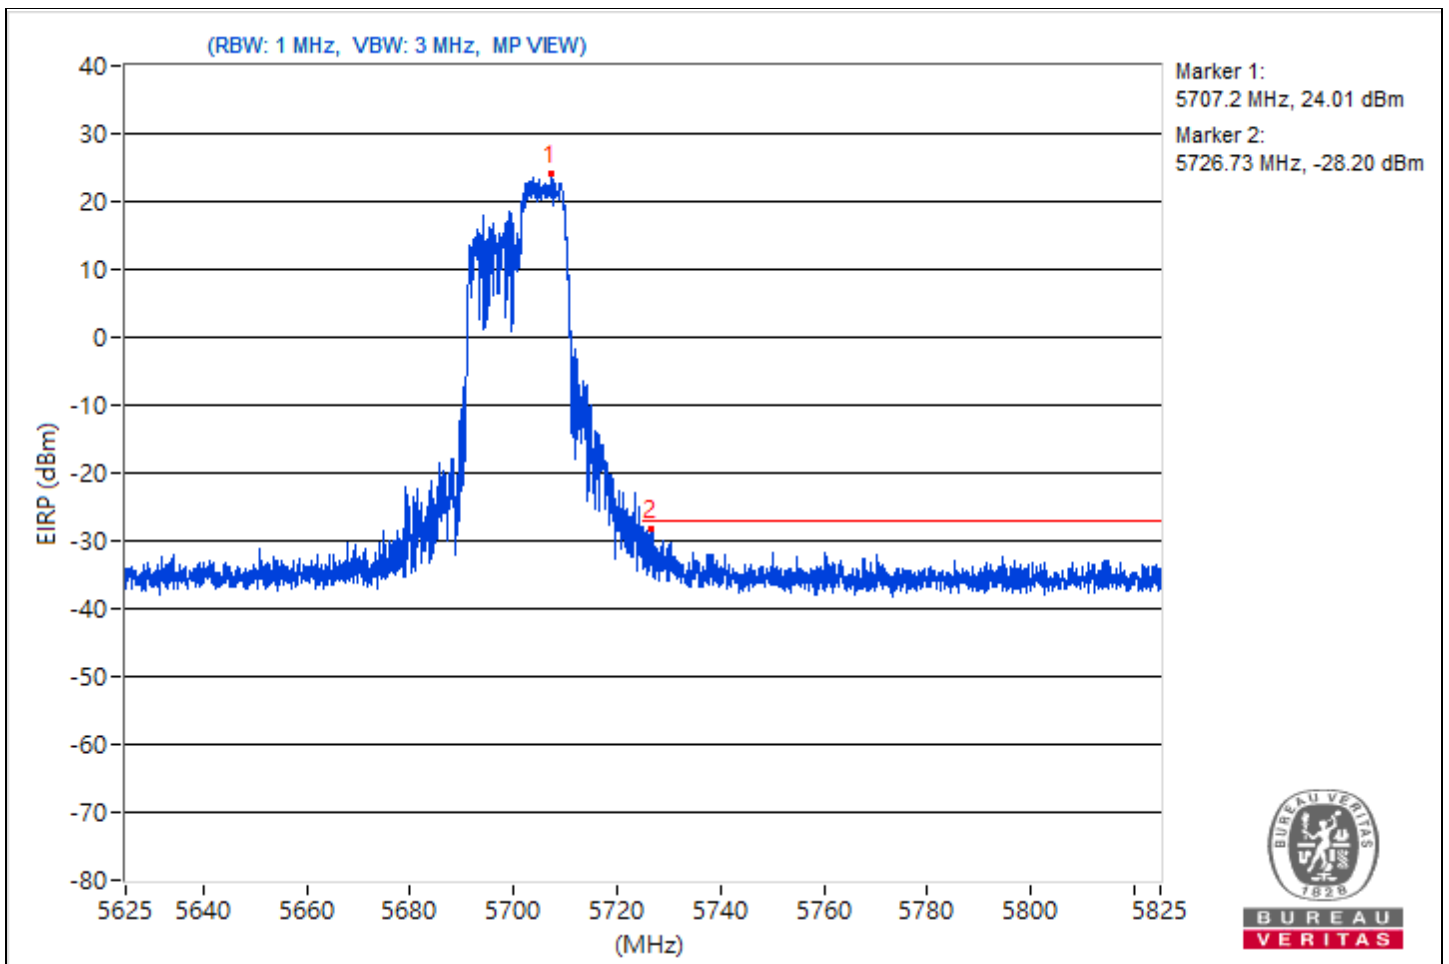


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5725.27	119.61			19.43	4.92	24.35
2	#5925.45	63.92	68.26	-4.34	-36.26	4.92	-31.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

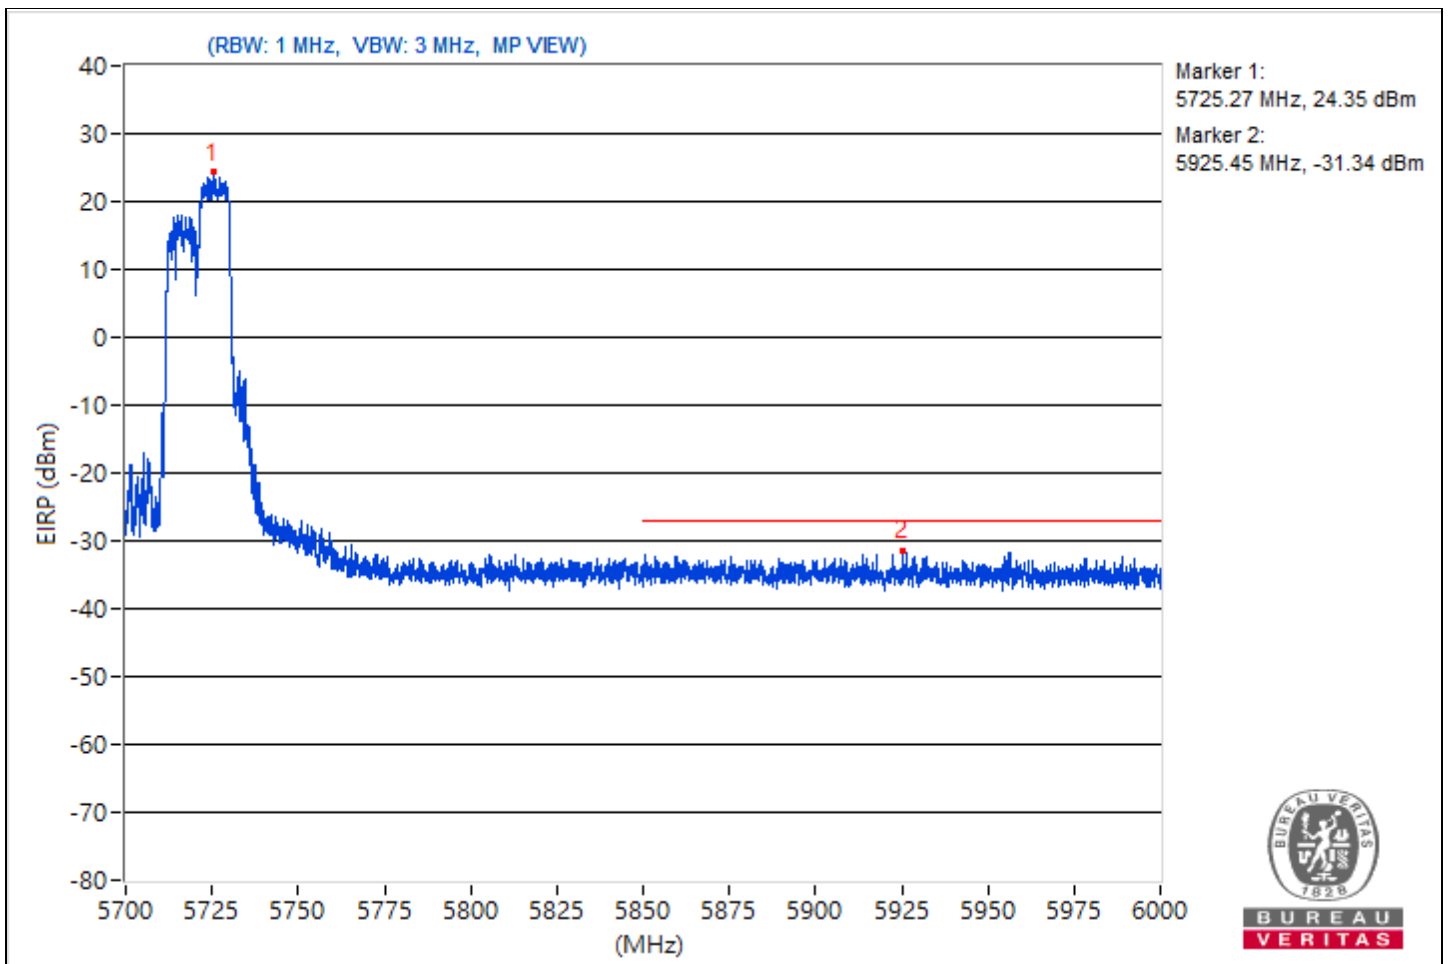


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5322.9	121.42 PK			21.24	4.92	26.16
2	*5322.8	109.41 AV			9.23	4.92	14.15
3	5381.73	64.35 PK	74	-9.65	-35.83	4.92	-30.91
4	5350.02	45.54 AV	54	-8.46	-54.64	4.92	-49.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

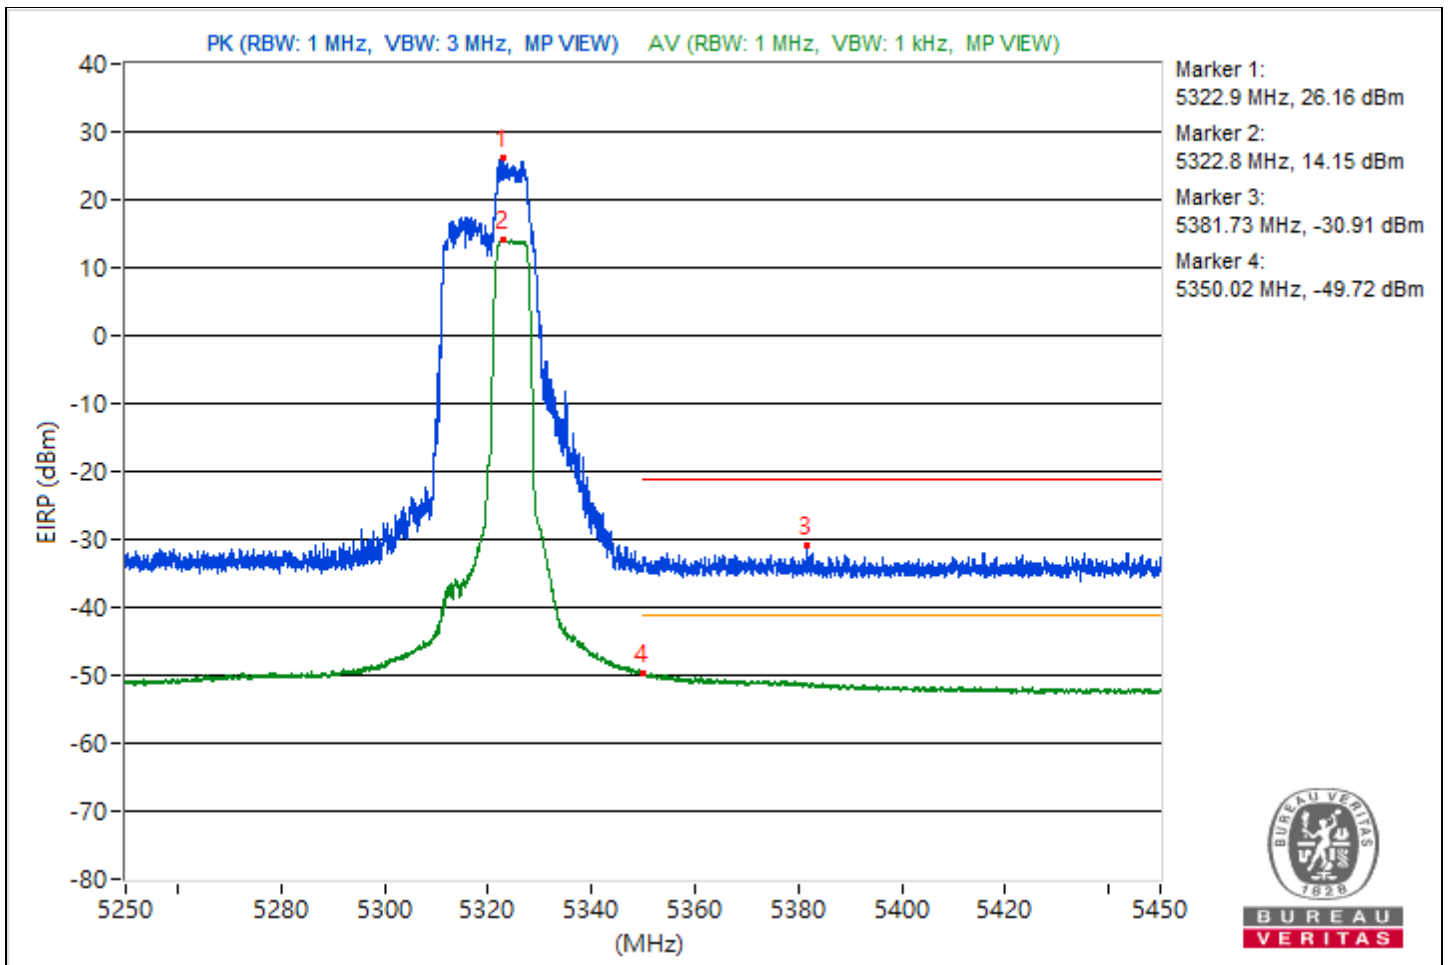


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5494.72	119.49 PK			19.31	4.92	24.23
2	5428.81	62.52 PK	74	-11.48	-37.66	4.92	-32.74
3	#5467.25	62.24 PK	68.26	-6.02	-37.94	4.92	-33.02
4	*5496.31	109.03 AV			8.85	4.92	13.77
5	5454.59	44.6 AV	54	-9.4	-55.58	4.92	-50.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

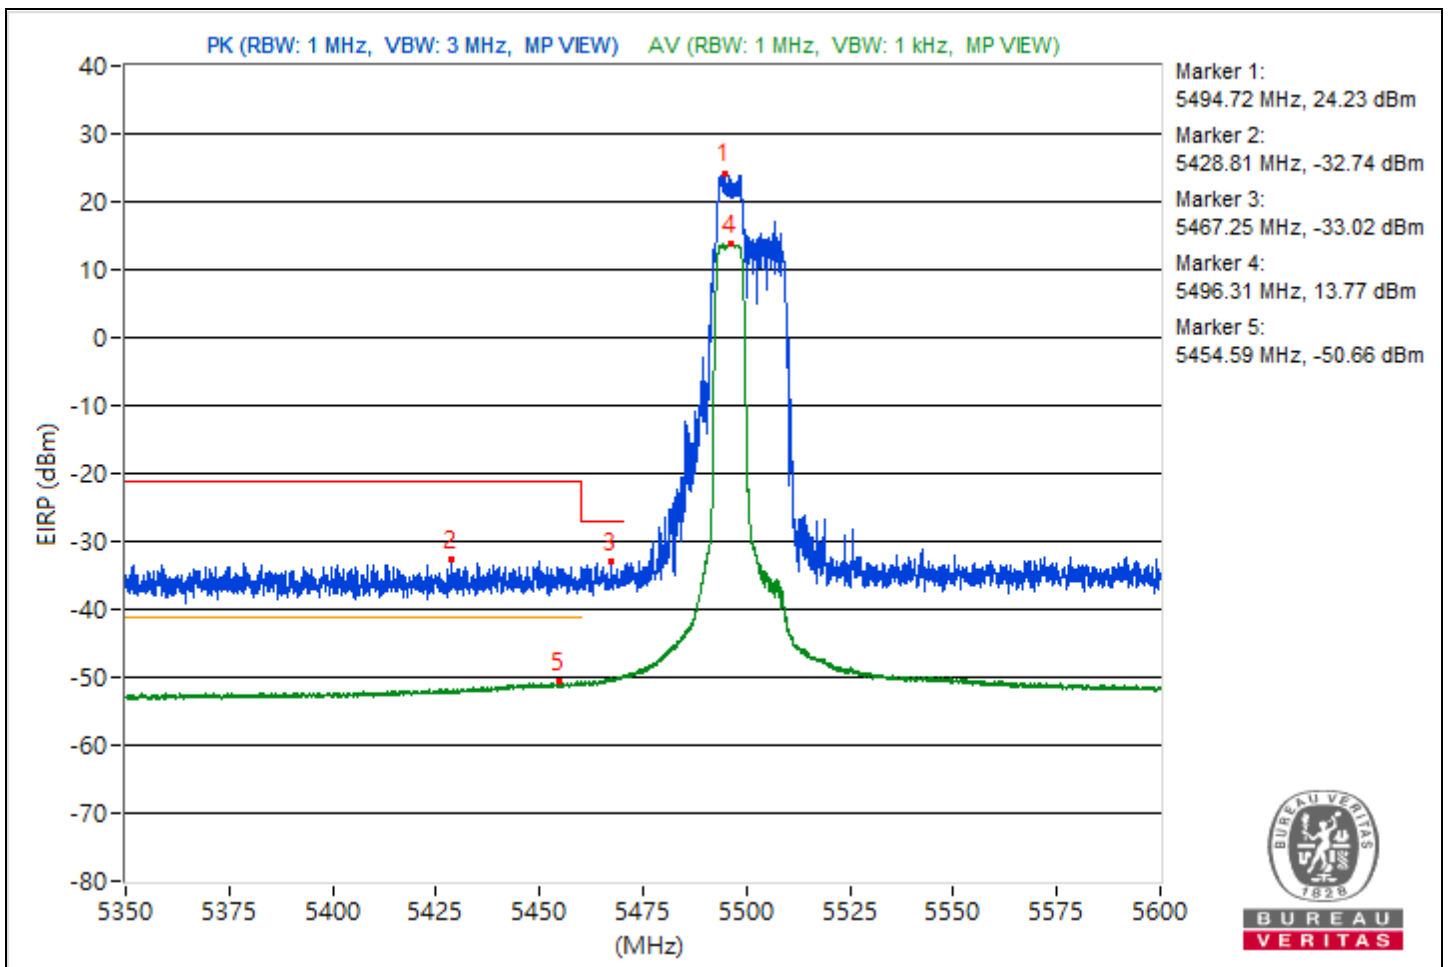


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5703.07	121.79			21.61	4.92	26.53
2	#5728	64.3	68.26	-3.96	-35.88	4.92	-30.96

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

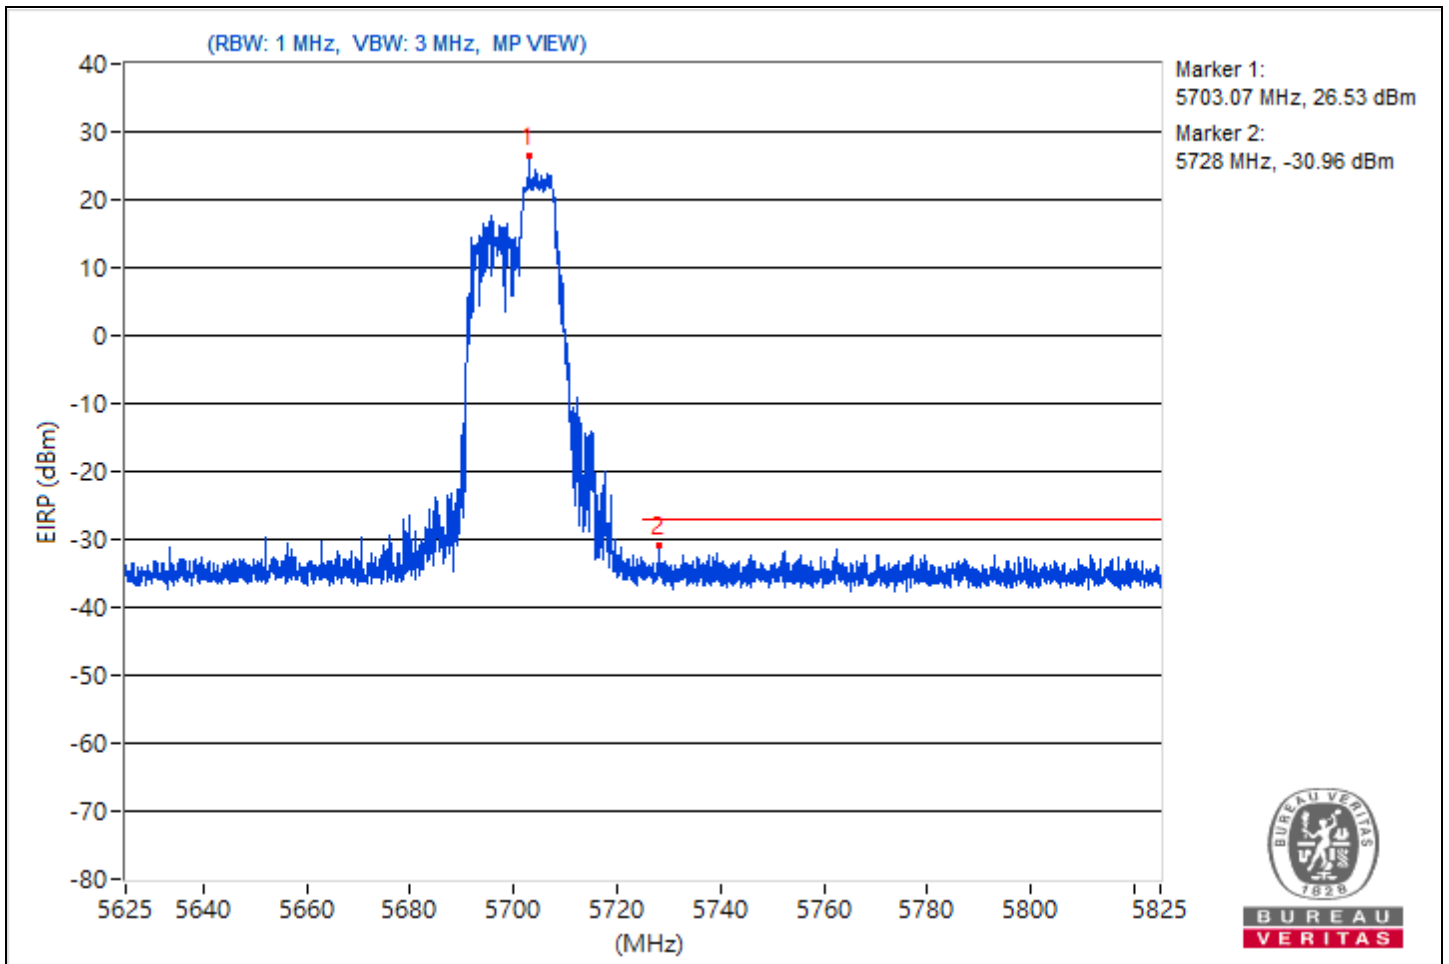


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5723.4	120.35			20.17	4.92	25.09
2	#5926.31	63.94	68.26	-4.32	-36.24	4.92	-31.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

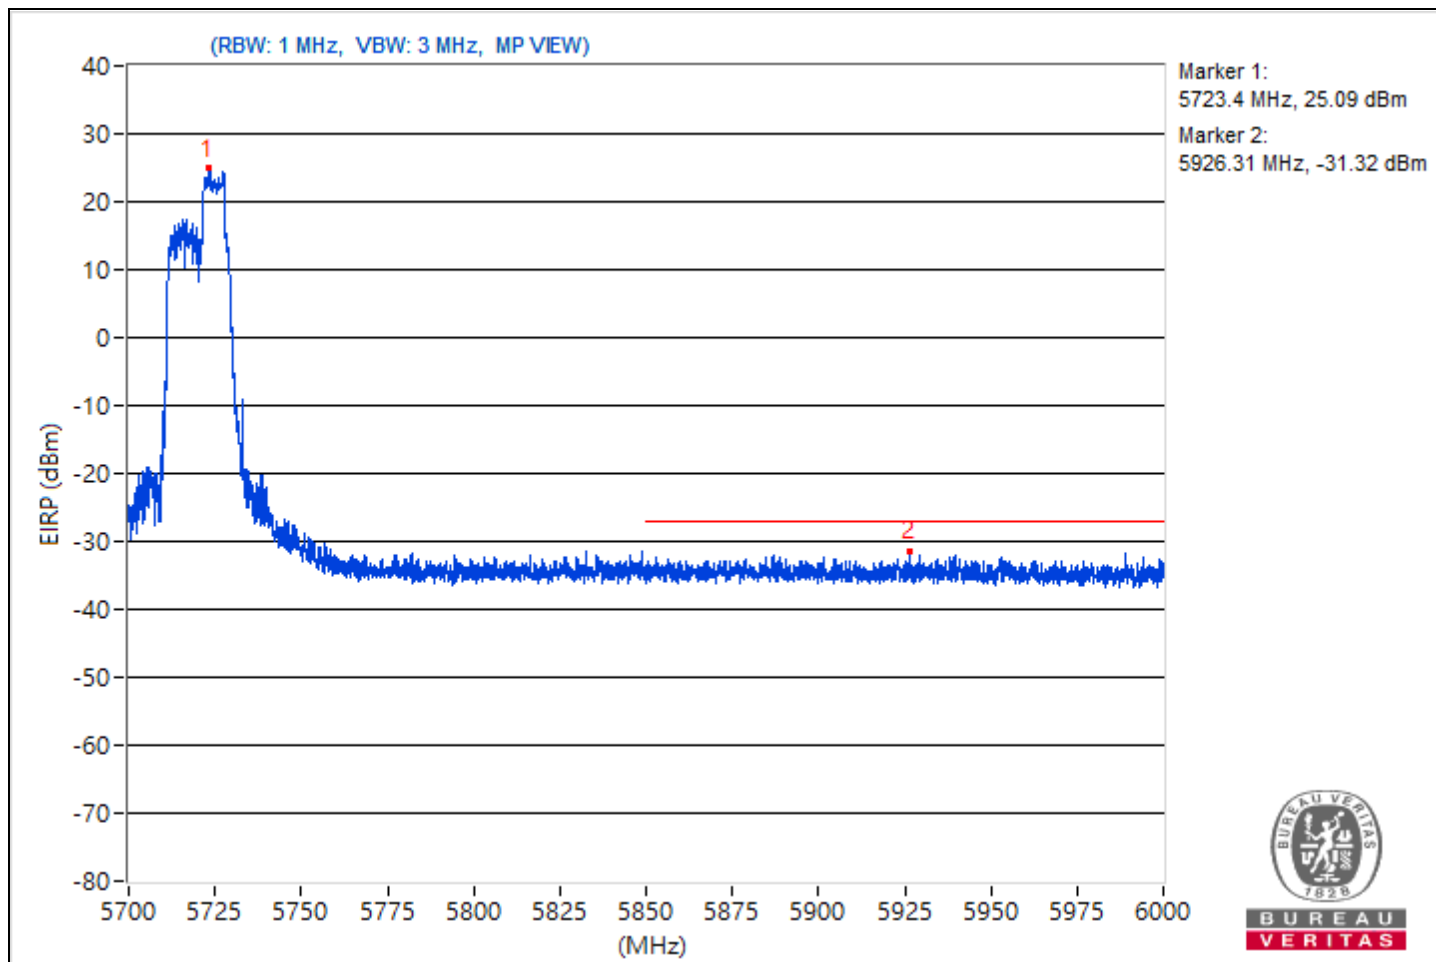


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.05	118.97 PK			18.79	4.92	23.71
2	*5321.12	109.6 AV			9.42	4.92	14.34
3	5350.35	69.54 PK	74	-4.46	-30.64	4.92	-25.72
4	5350.07	49.9 AV	54	-4.1	-50.28	4.92	-45.36

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

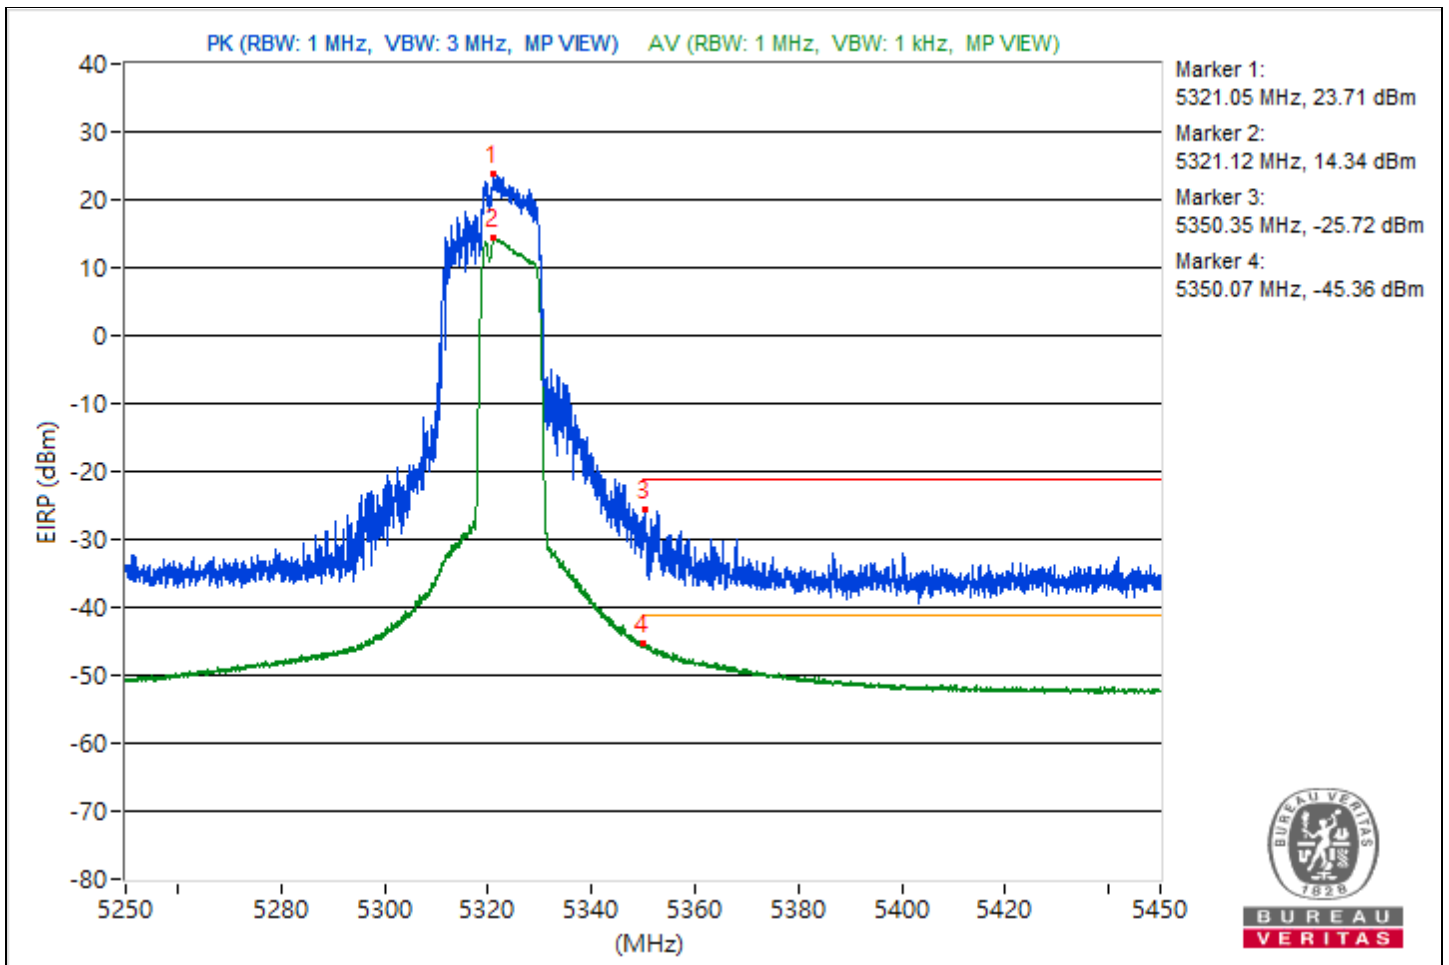


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5499.47	119.12 PK			18.94	4.92	23.86
2	5459.19	63.86 PK	74	-10.14	-36.32	4.92	-31.4
3	#5466.44	67.48 PK	68.26	-0.78	-32.7	4.92	-27.78
4	*5499.44	109.08 AV			8.9	4.92	13.82
5	5459.91	47.29 AV	54	-6.71	-52.89	4.92	-47.97

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

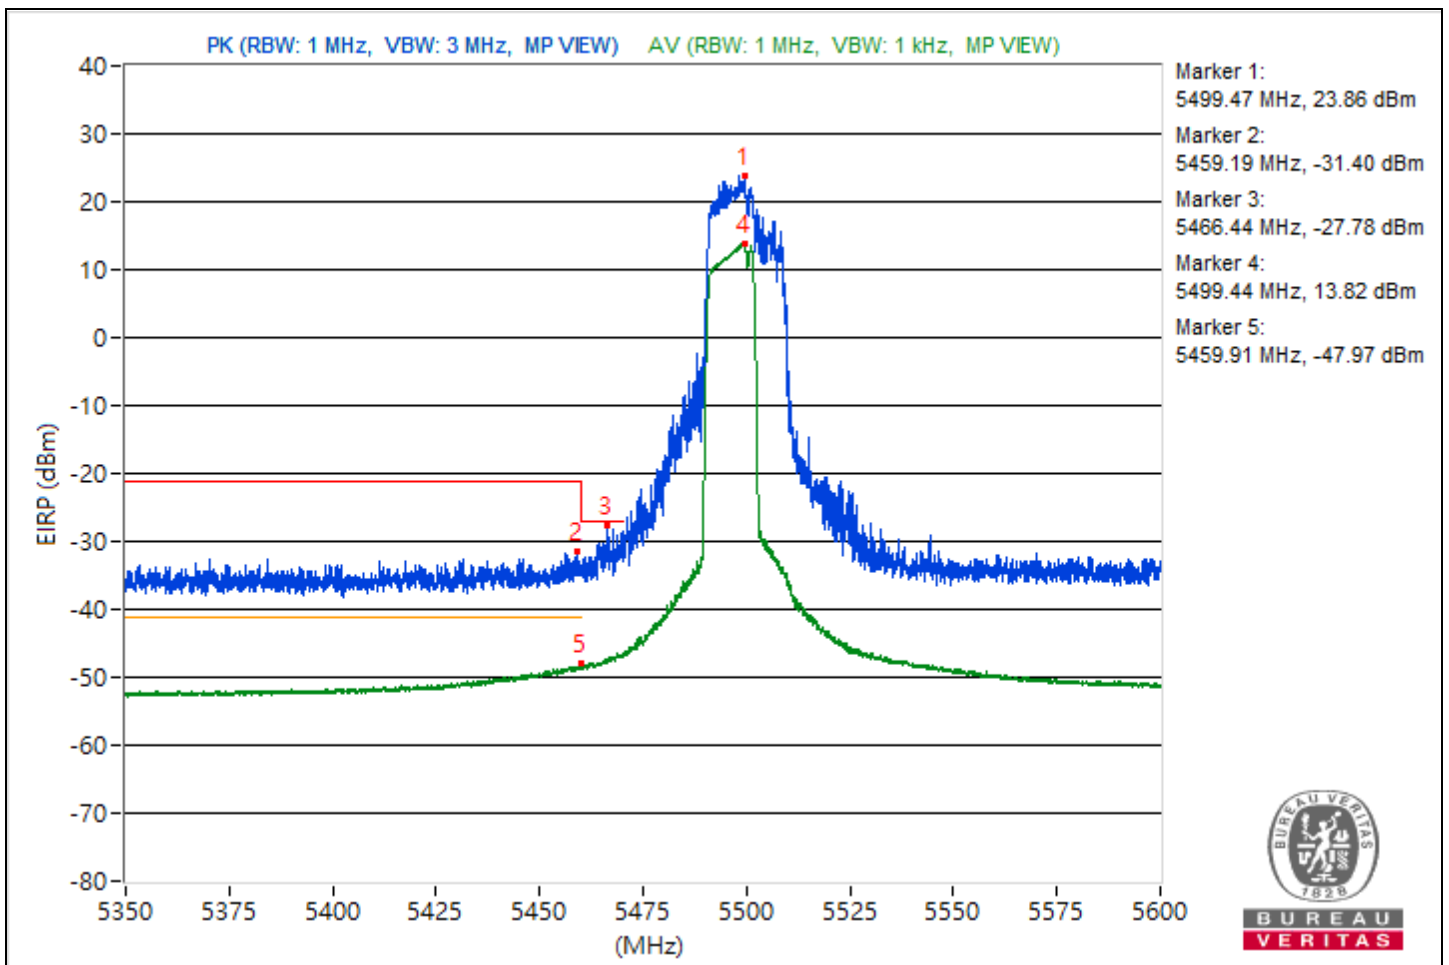

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5703.07	119.25			19.07	4.92	23.99
2	#5726.15	68.18	68.26	-0.08	-32	4.92	-27.08

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

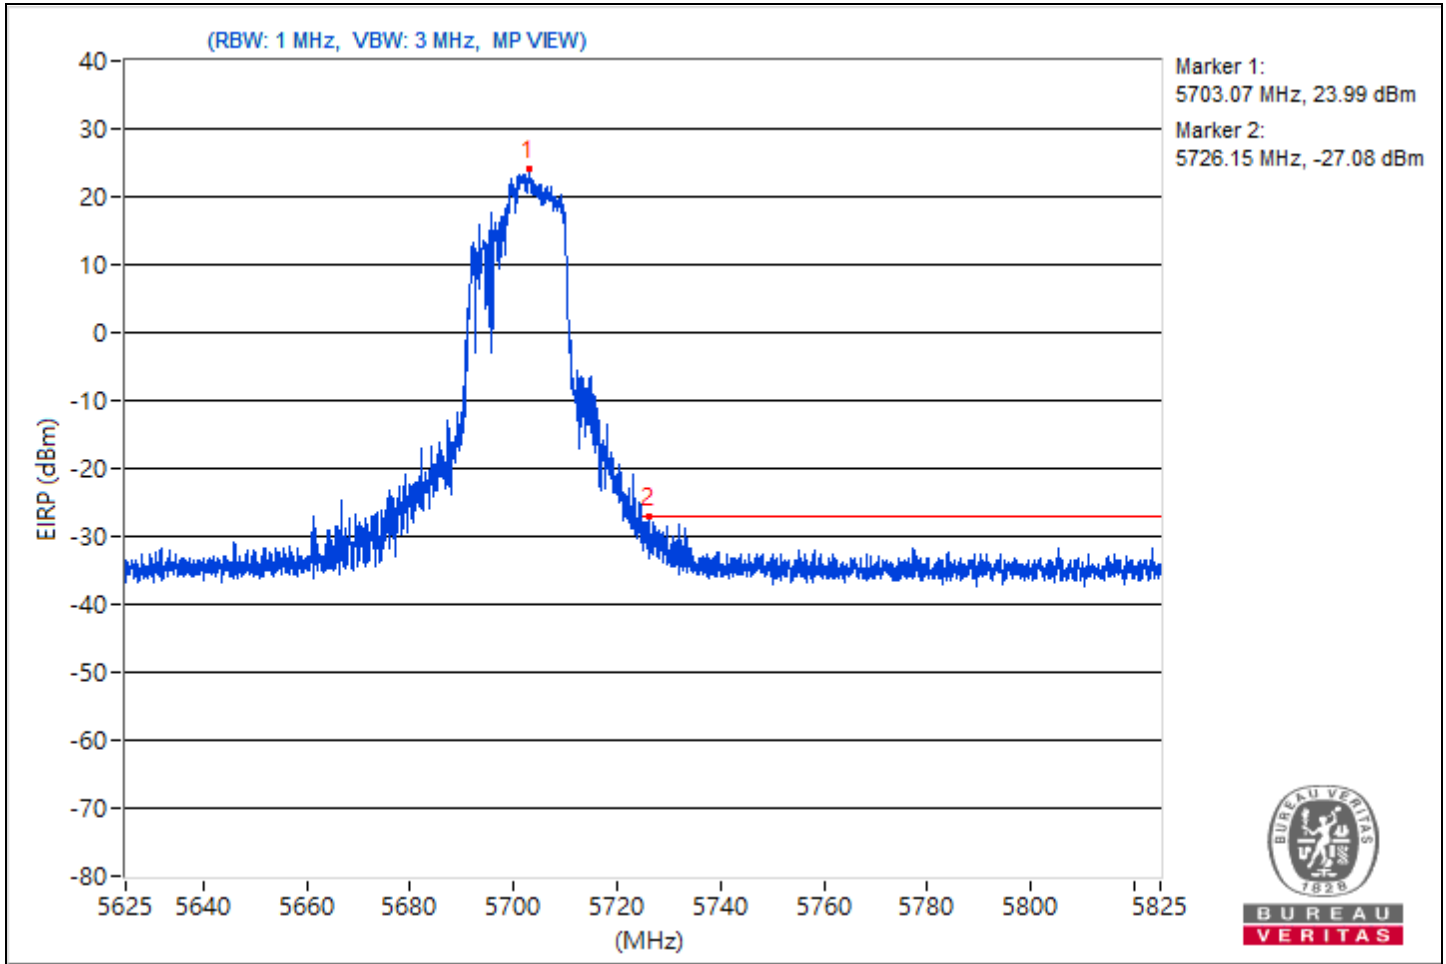


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.45	120.81			20.63	4.92	25.55
2	#5882.81	64.61	68.26	-3.65	-35.57	4.92	-30.65

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

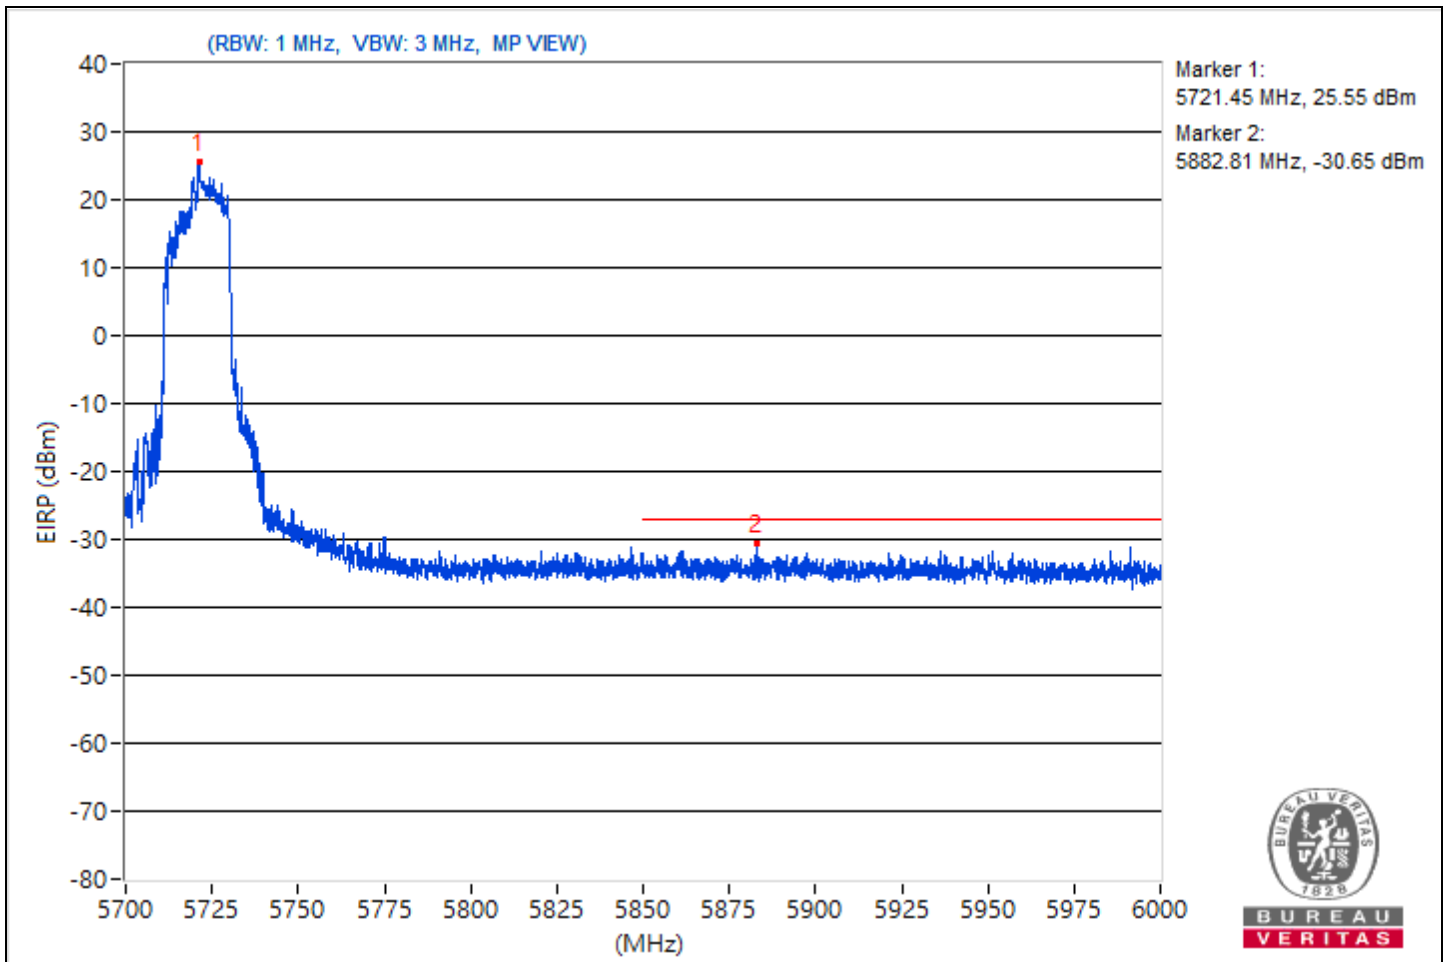


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5272.65	108.59 PK			8.41	4.92	13.33
2	*5288.18	98.4 AV			-1.78	4.92	3.14
3	5432.65	62 PK	74	-12	-38.18	4.92	-33.26
4	5354.15	44.66 AV	54	-9.34	-55.52	4.92	-50.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

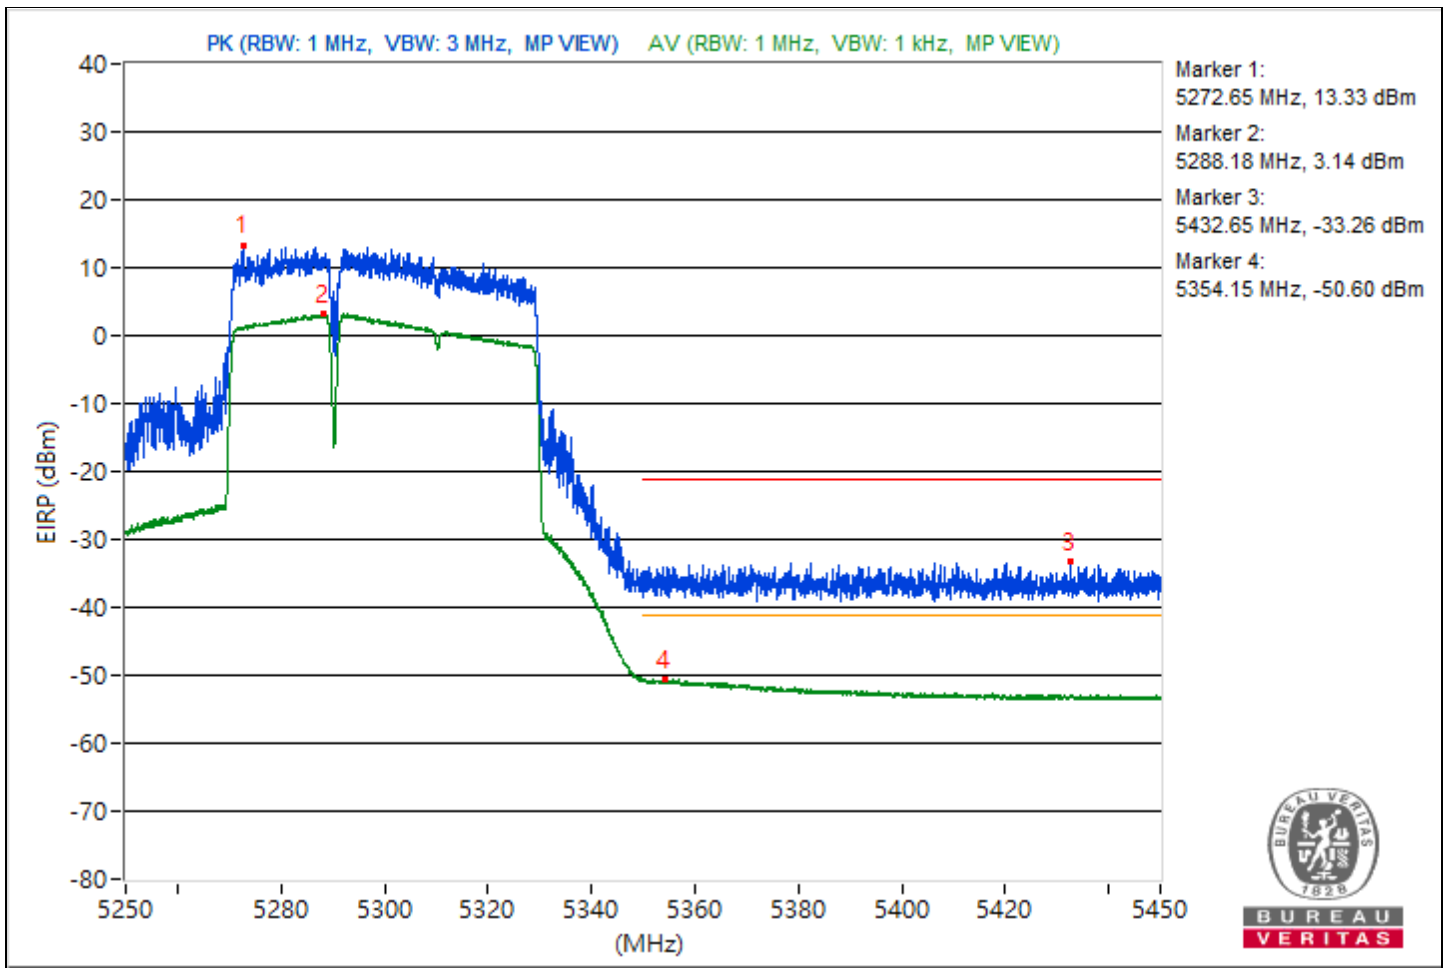


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5528.5	109.07 PK			8.89	4.92	13.81
2	5457.53	62.27 PK	74	-11.73	-37.91	4.92	-32.99
3	#5468.41	62.27 PK	68.26	-5.99	-37.91	4.92	-32.99
4	*5528.75	98.32 AV			-1.86	4.92	3.06
5	5458.59	43.95 AV	54	-10.05	-56.23	4.92	-51.31

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

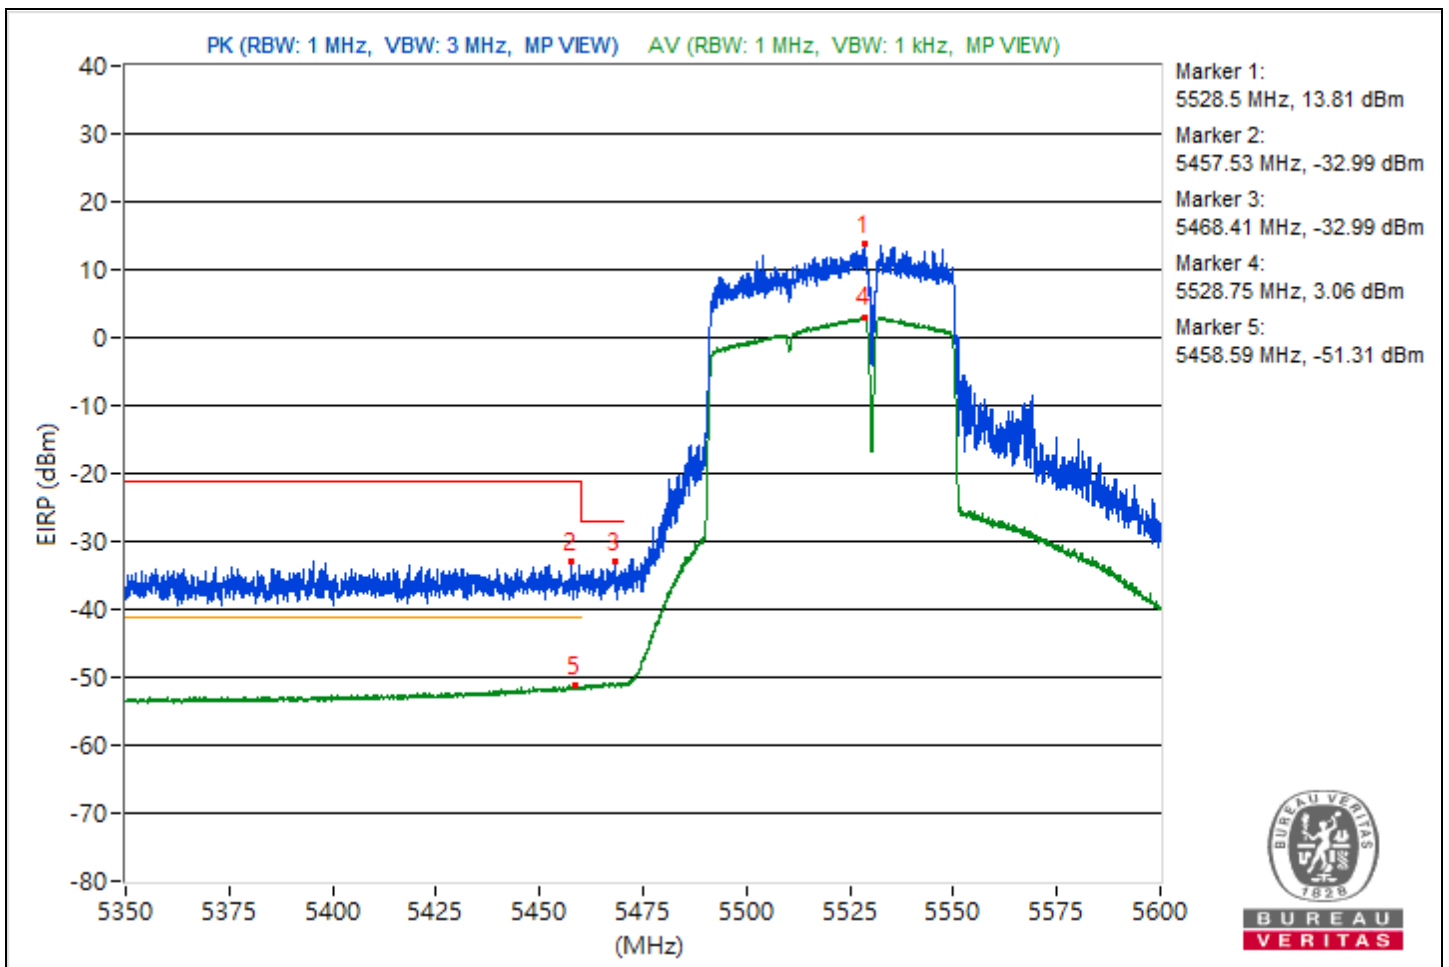


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5700.3	110.04			9.86	4.92	14.78
2	#5992.91	63.87	68.26	-4.39	-36.31	4.92	-31.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

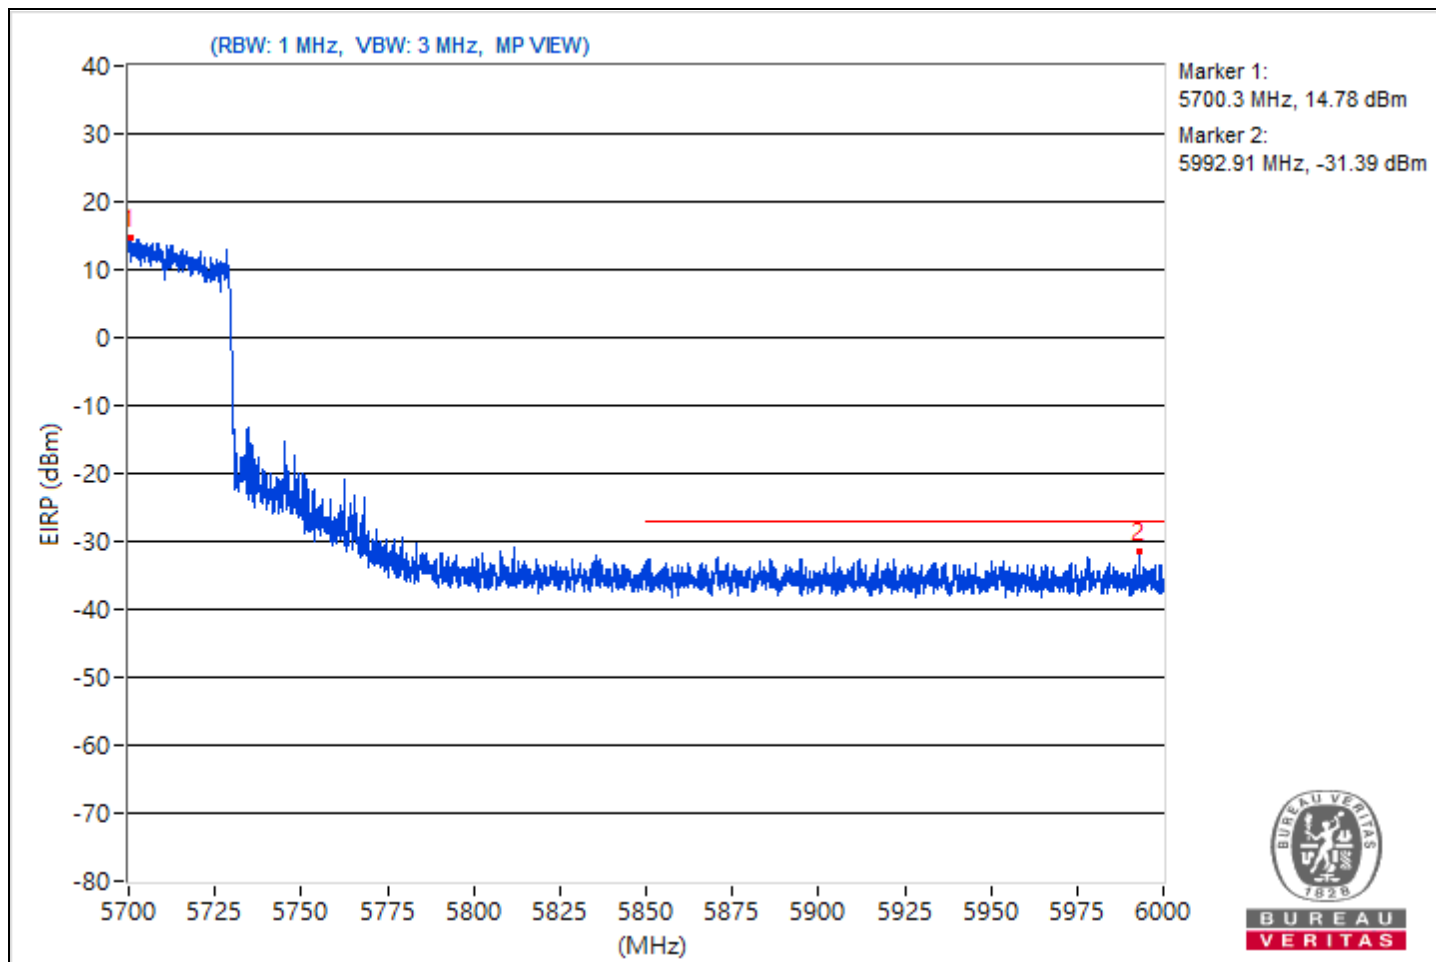


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5245.57	105.28 PK			5.1	4.92	10.02
2	*5247.37	93.97 AV			-6.21	4.92	-1.29
3	5139.27	65.47 PK	74	-8.53	-34.71	4.92	-29.79
4	5128.02	49.55 AV	54	-4.45	-50.63	4.92	-45.71

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

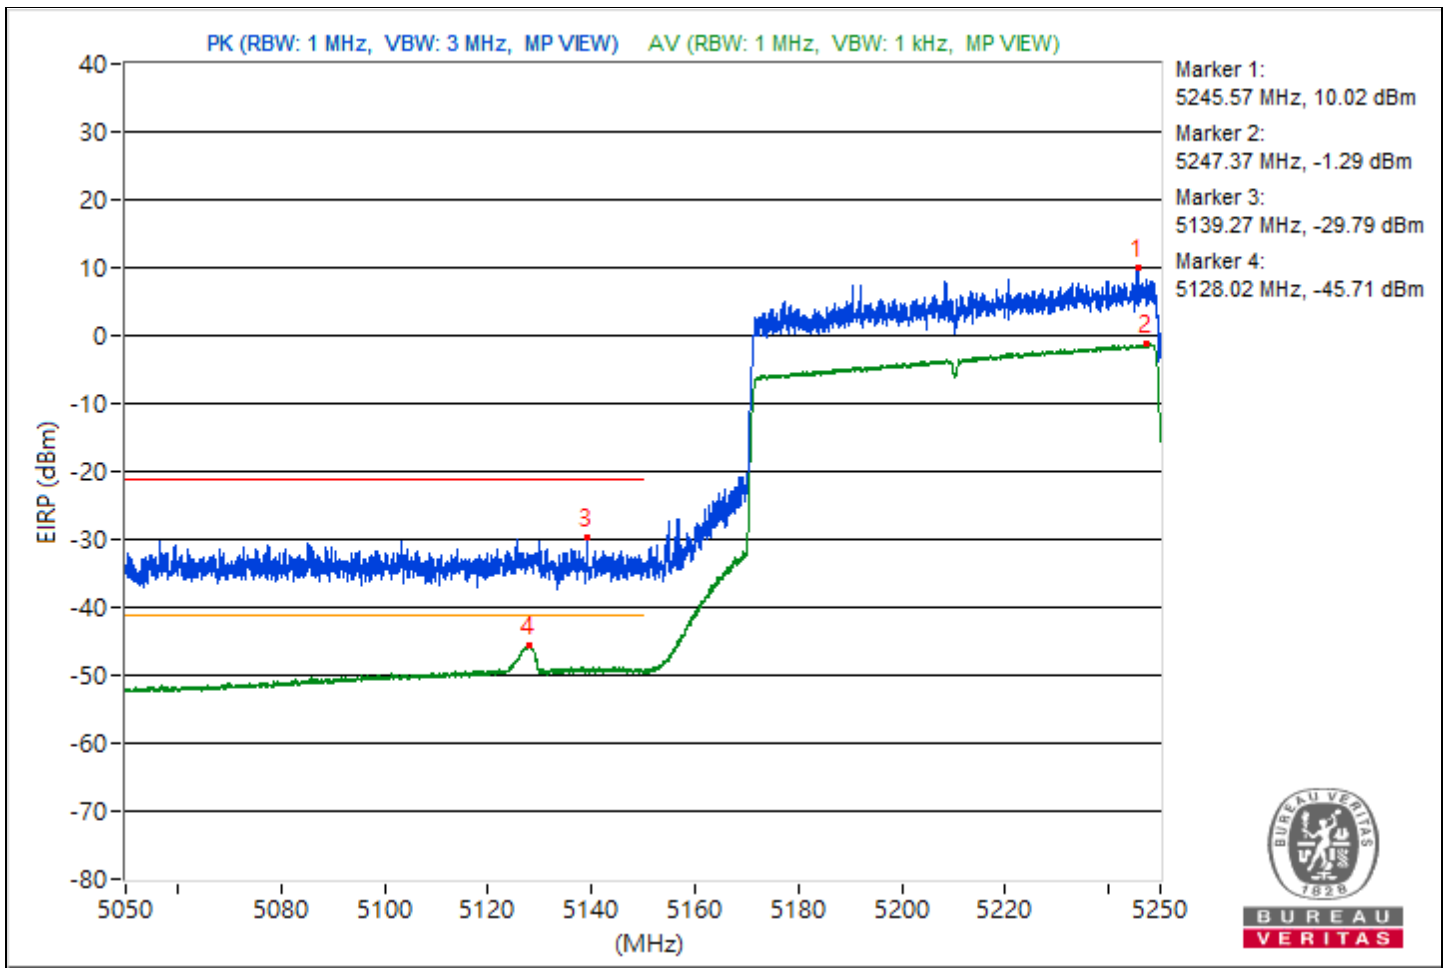


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5255.07	105.56 PK			5.38	4.92	10.3
2	*5252.07	93.8 AV			-6.38	4.92	-1.46
3	5365.7	62.27 PK	74	-11.73	-37.91	4.92	-32.99
4	5352.23	45.57 AV	54	-8.43	-54.61	4.92	-49.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

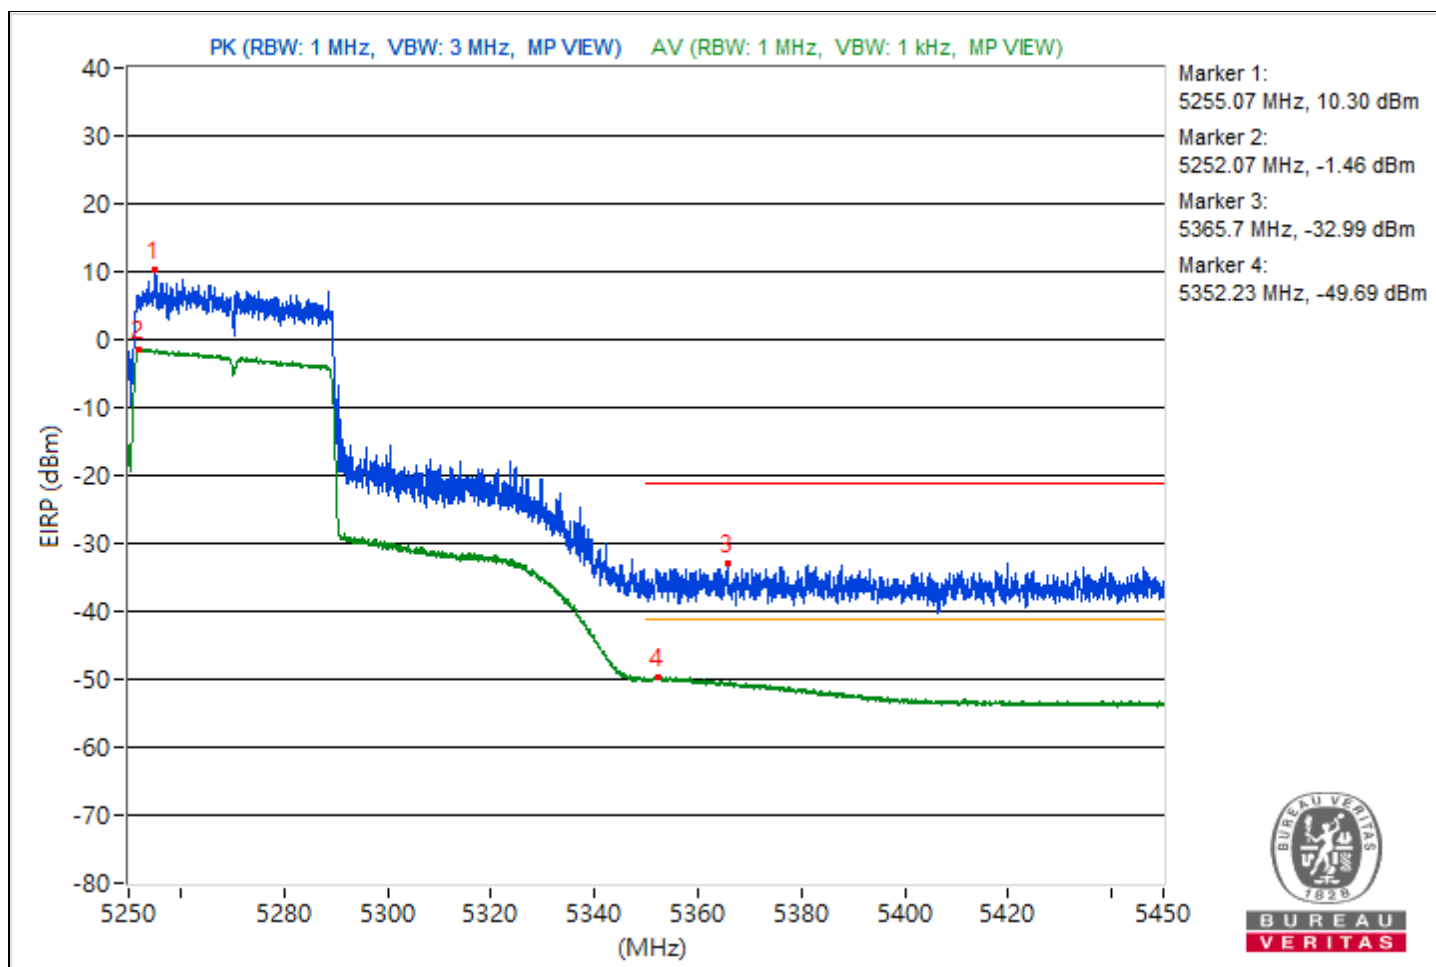


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5579.12	105.4 PK			5.22	4.92	10.14
2	5448.03	63.41 PK	74	-10.59	-36.77	4.92	-31.85
3	#5462.25	62.77 PK	68.26	-5.49	-37.41	4.92	-32.49
4	*5568.31	94.18 AV			-6	4.92	-1.08
5	5448.25	48.56 AV	54	-5.44	-51.62	4.92	-46.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

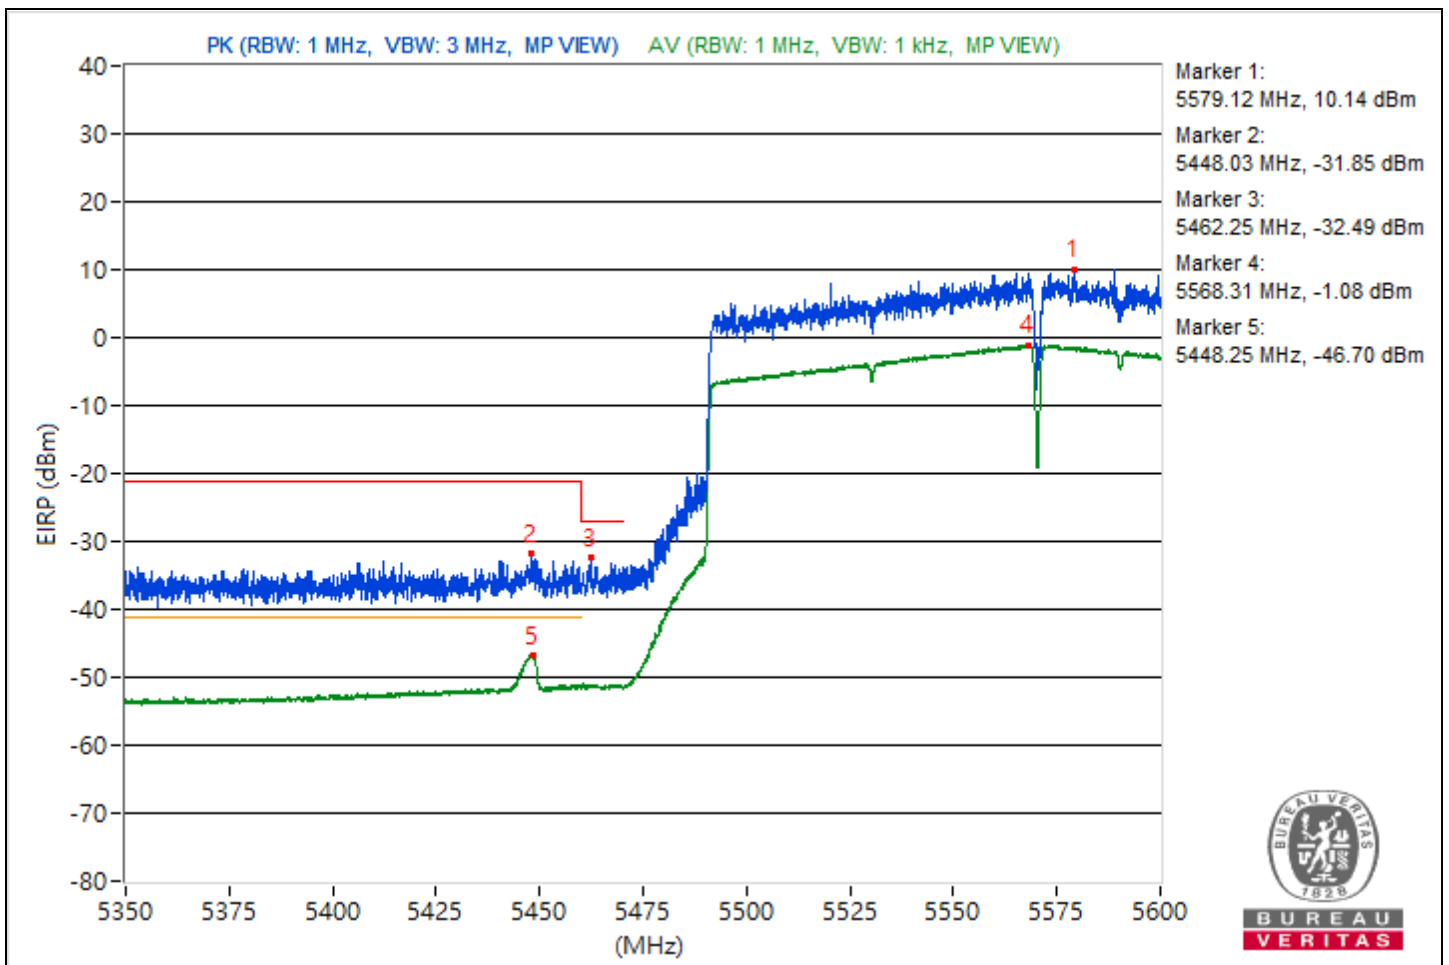


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5245.62	105.23 PK			5.05	4.92	9.97
2	*5247.82	93.74 AV			-6.44	4.92	-1.52
3	5140.52	65.14 PK	74	-8.86	-35.04	4.92	-30.12
4	5148.32	46.7 AV	54	-7.3	-53.48	4.92	-48.56

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

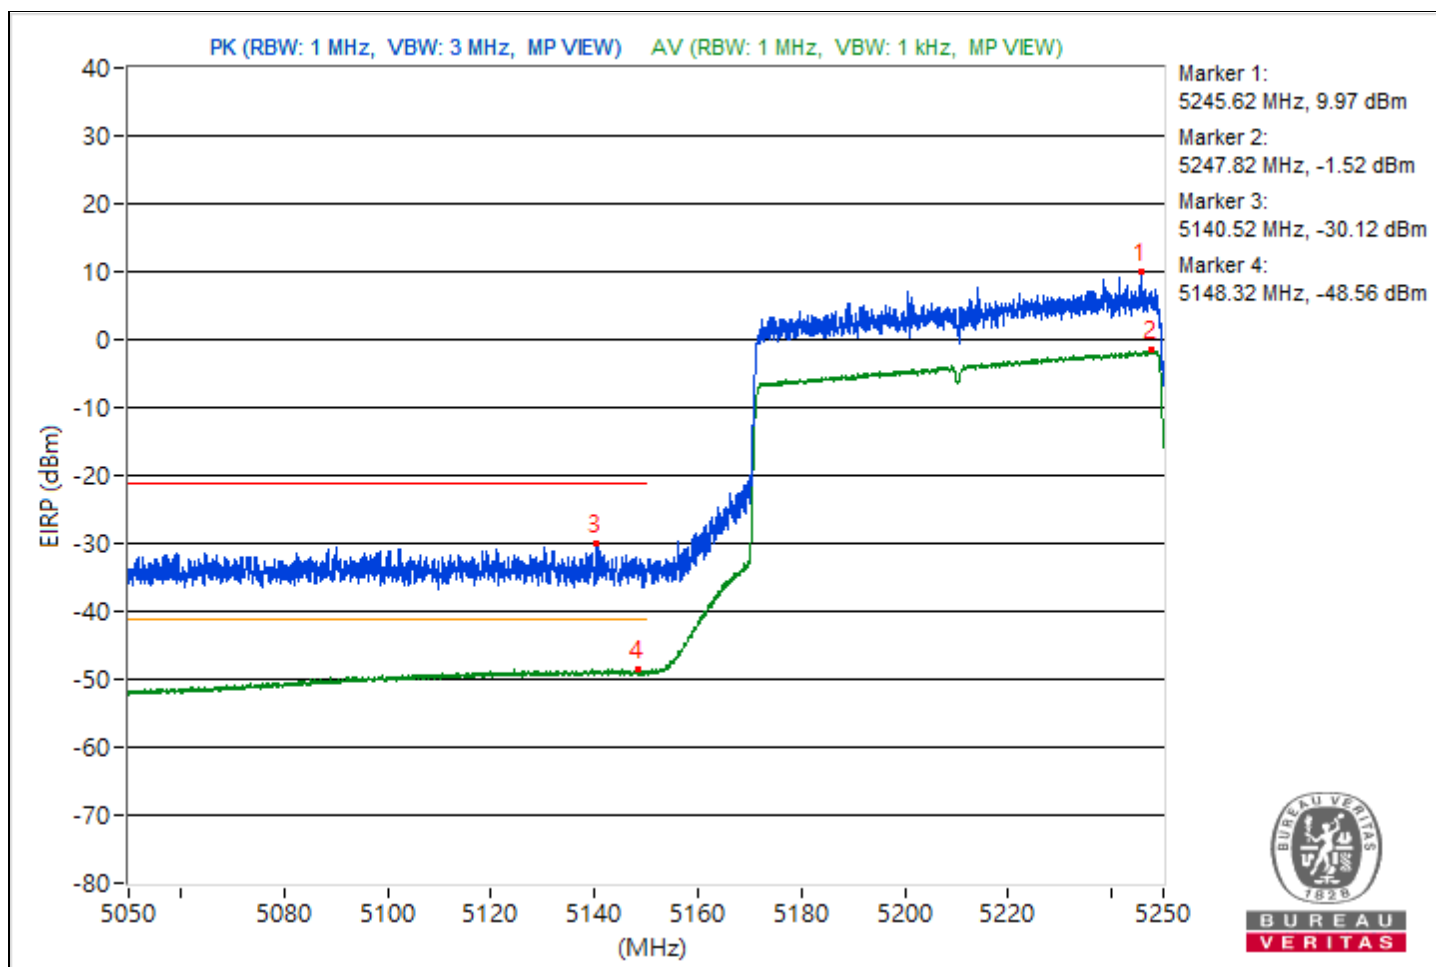


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5252.18	106.06 PK			5.88	4.92	10.8
2	*5252.73	93.42 AV			-6.76	4.92	-1.84
3	5397.62	62.7 PK	74	-11.3	-37.48	4.92	-32.56
4	5358.02	46.66 AV	54	-7.34	-53.52	4.92	-48.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

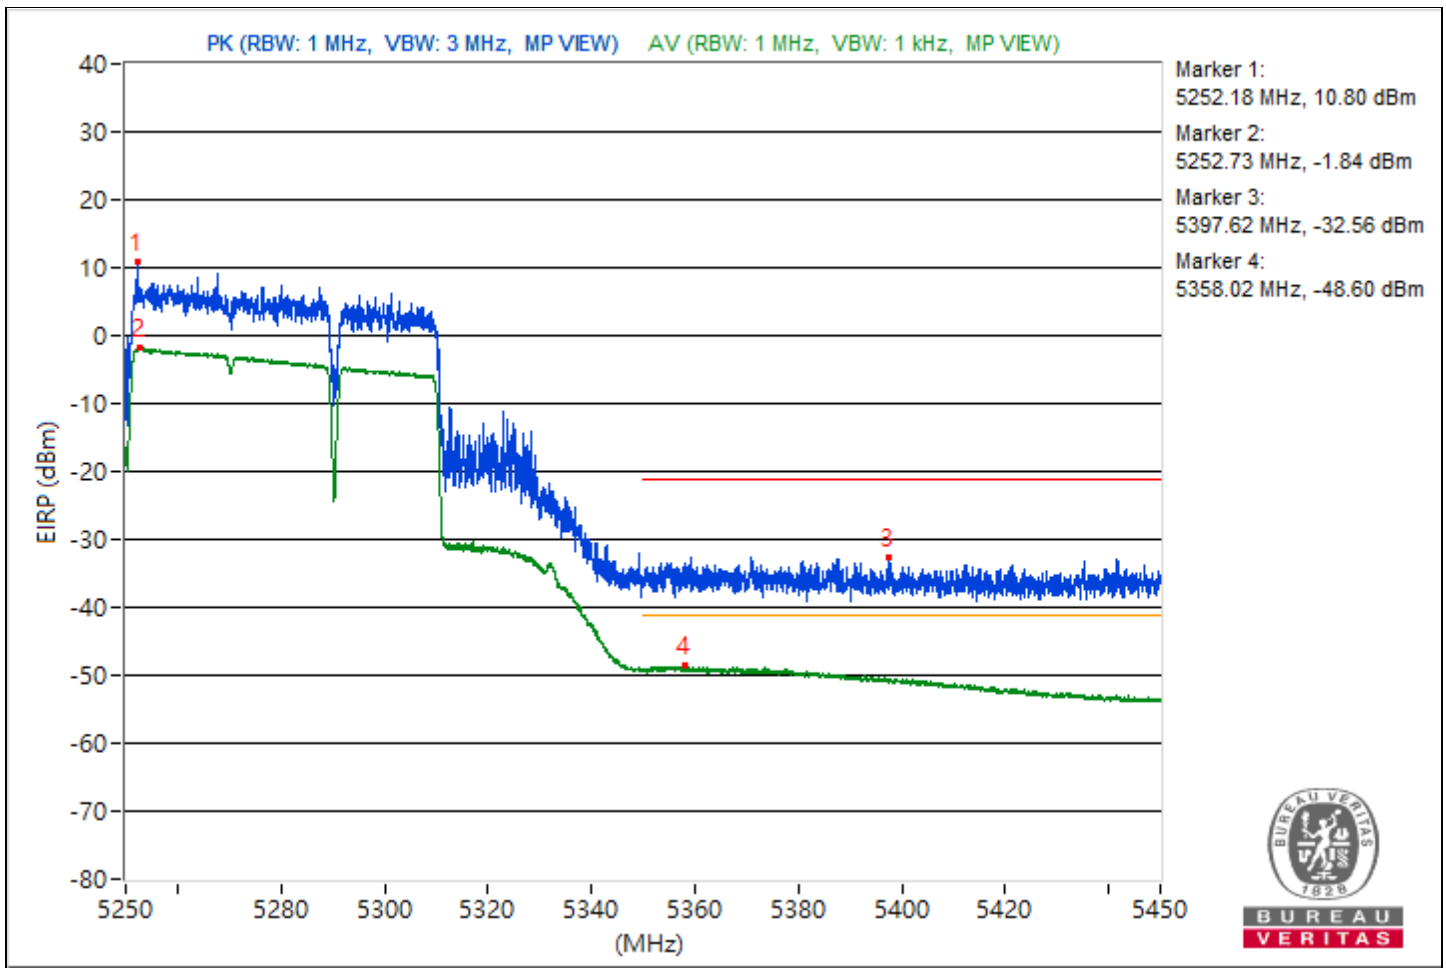


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5583.5	105.65 PK			5.47	4.92	10.39
2	5438.56	62.59 PK	74	-11.41	-37.59	4.92	-32.67
3	#5462.75	62.99 PK	68.26	-5.27	-37.19	4.92	-32.27
4	*5568.31	93.81 AV			-6.37	4.92	-1.45
5	5459.31	44.43 AV	54	-9.57	-55.75	4.92	-50.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

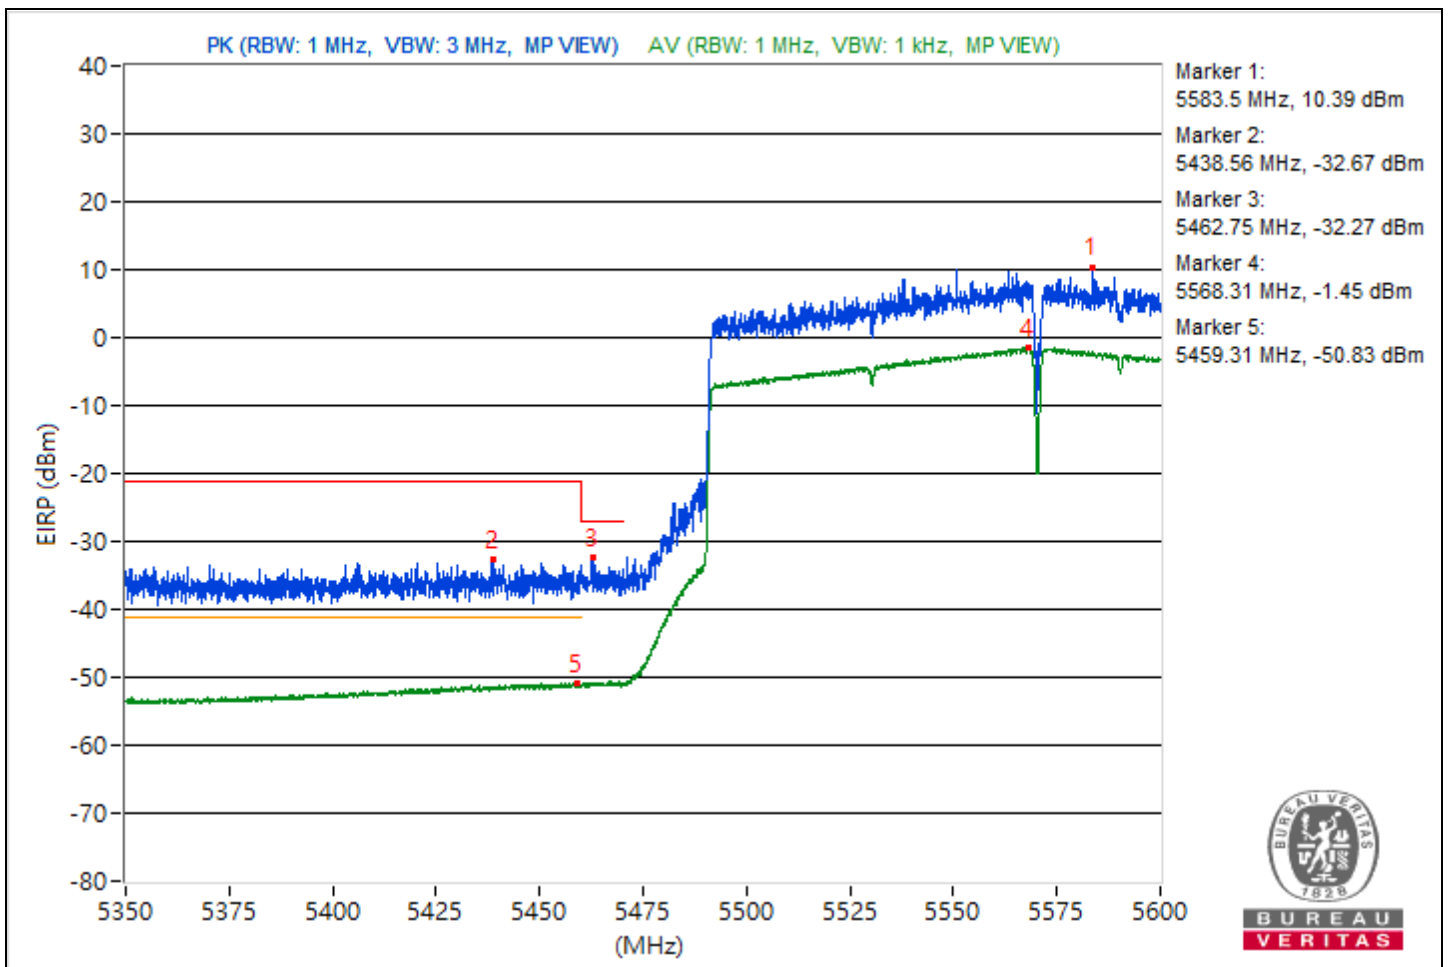



2S2T


Conducted Unwanted Emissions


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4455.67	55.19 PK	68.26	-13.07	-46.59	-50.09	4.92	-40.07
2	3791.21	47.32 AV	54	-6.68	-55.66	-56.08	4.92	-47.94
3	#10500.18	55.19 PK	68.26	-13.07	-46.4	-50.55	4.92	-40.07
4	8376.8	44.47 AV	54	-9.53	-59.04	-58.42	4.92	-50.79
5	#15245.6	55.38 PK	68.26	-12.88	-52.08	-45.7	4.92	-39.88
6	18831.1	46.18 AV	54	-7.82	-57.35	-56.69	4.92	-49.08
7	#24029.7	59.16 PK	68.26	-9.1	-45.86	-42.74	4.92	-36.1
8	23911.5	48.63 AV	54	-5.37	-55.13	-54.06	4.92	-46.63
9	#38145.24	52.01 PK	68.26	-16.25	-49.49	-53.96	4.92	-43.25
10	39998.76	42.82 AV	54	-11.18	-60.39	-60.36	4.92	-52.44

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

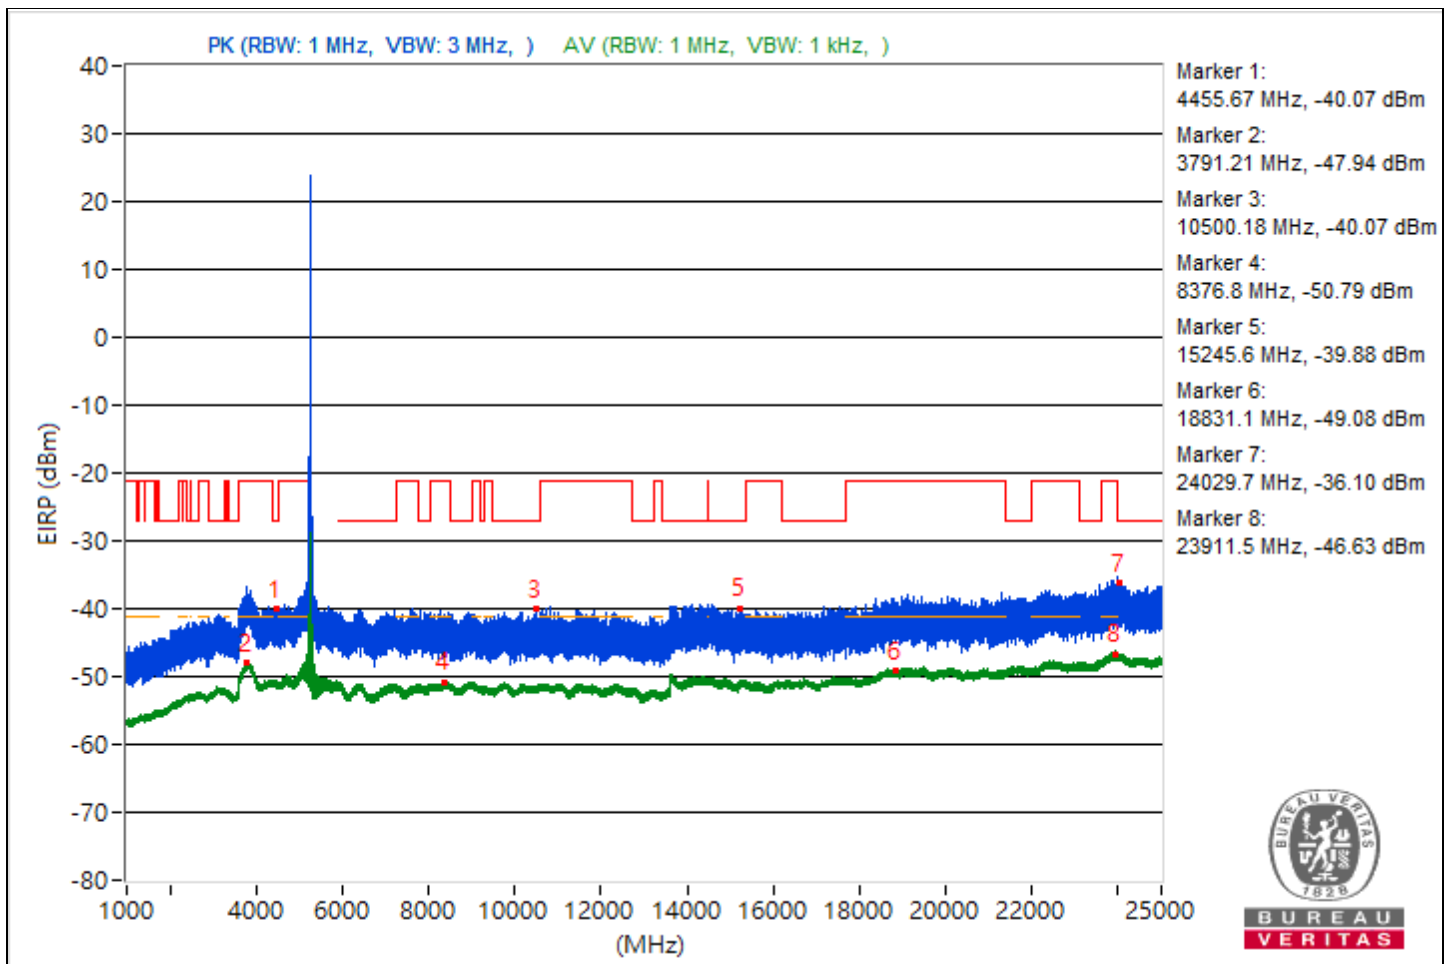

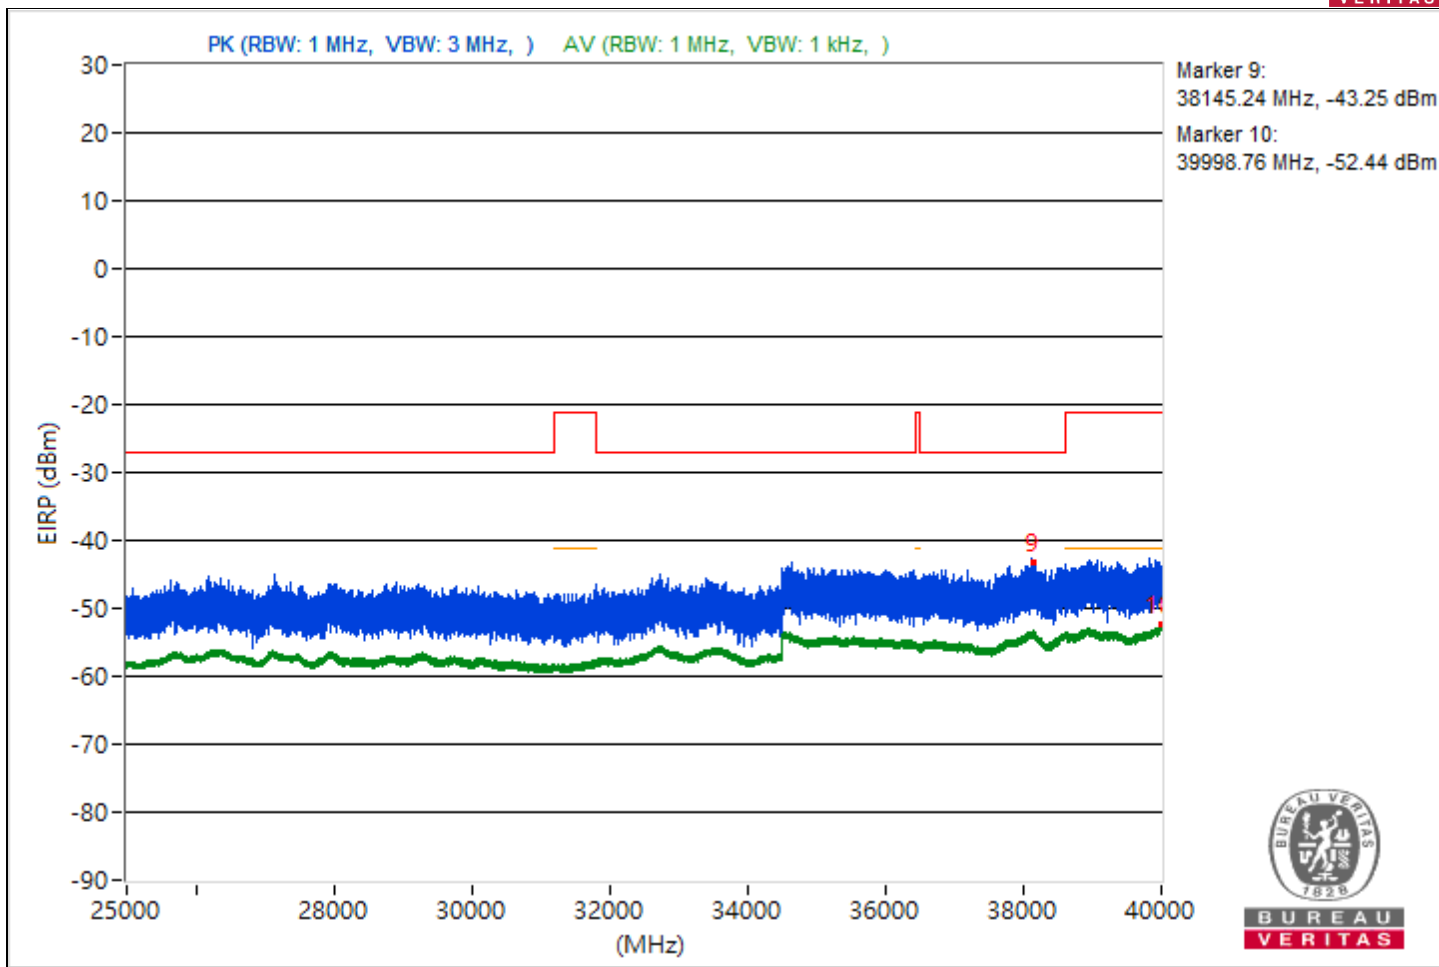



RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4463.13	55.77 PK	68.26	-12.49	-49.71	-45.92	4.92	-39.49
2	3849.08	47.25 AV	54	-6.75	-55.64	-56.28	4.92	-48.01
3	#9742.31	55.3 PK	68.26	-12.96	-46.27	-50.52	4.92	-39.96
4	9002.67	44.52 AV	54	-9.48	-58.9	-58.45	4.92	-50.74
5	#16892.1	55.66 PK	68.26	-12.6	-50	-45.97	4.92	-39.6
6	18997	46.2 AV	54	-7.8	-56.58	-57.43	4.92	-49.06
7	#24947.1	58.6 PK	68.26	-9.66	-42.93	-47.3	4.92	-36.66
8	23876.5	48.76 AV	54	-5.24	-54.74	-54.14	4.92	-46.5
9	#35859.2	52.18 PK	68.26	-16.08	-54.32	-49.16	4.92	-43.08
10	39967.82	42.71 AV	54	-11.29	-60.26	-60.71	4.92	-52.55

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

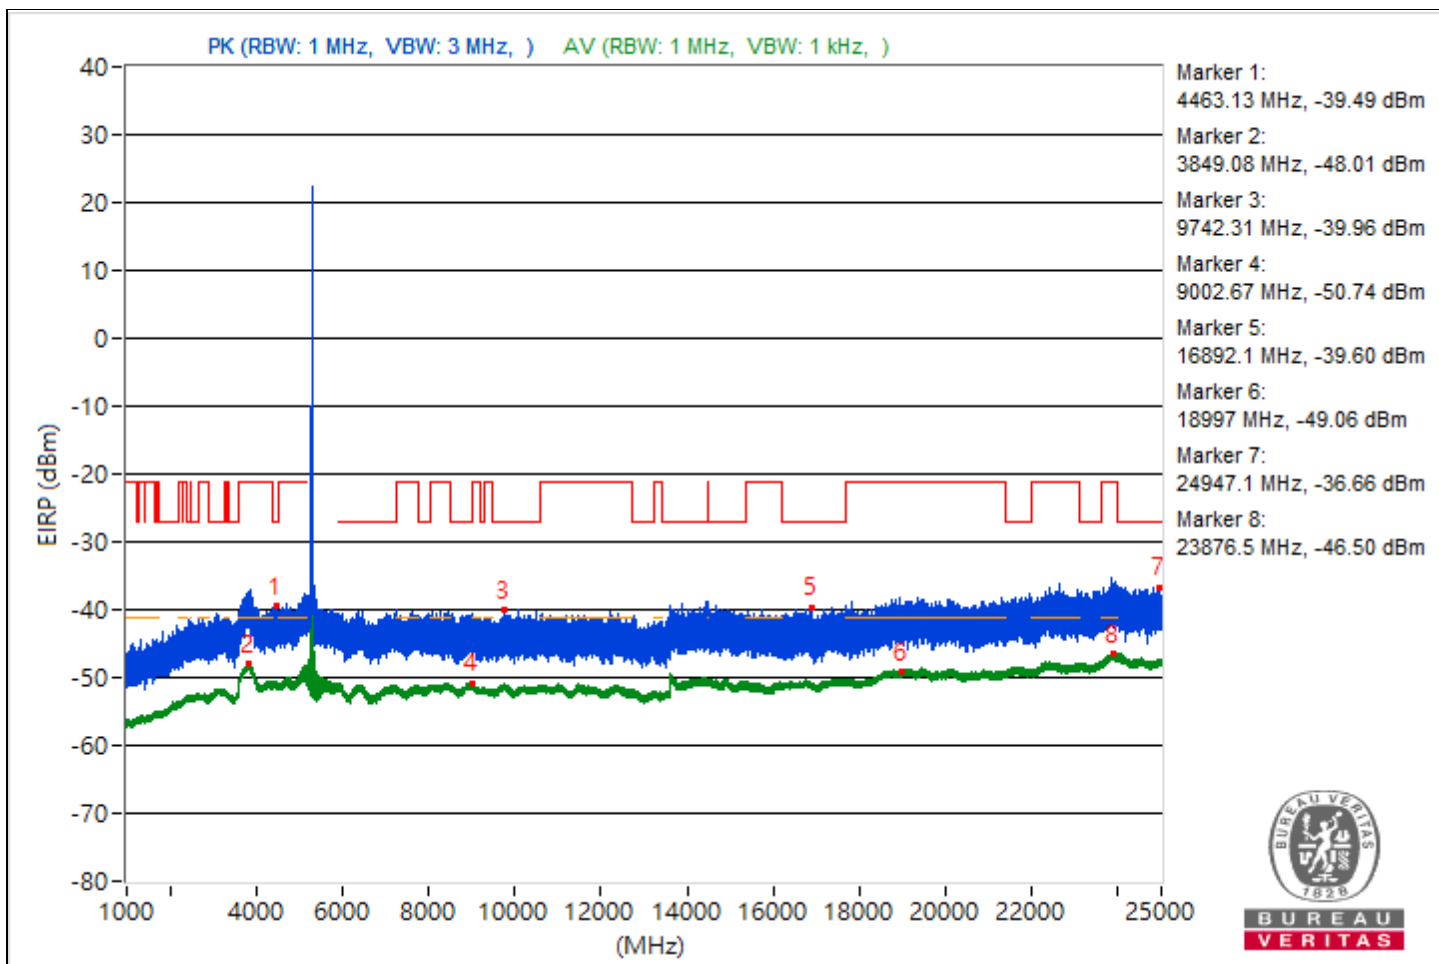

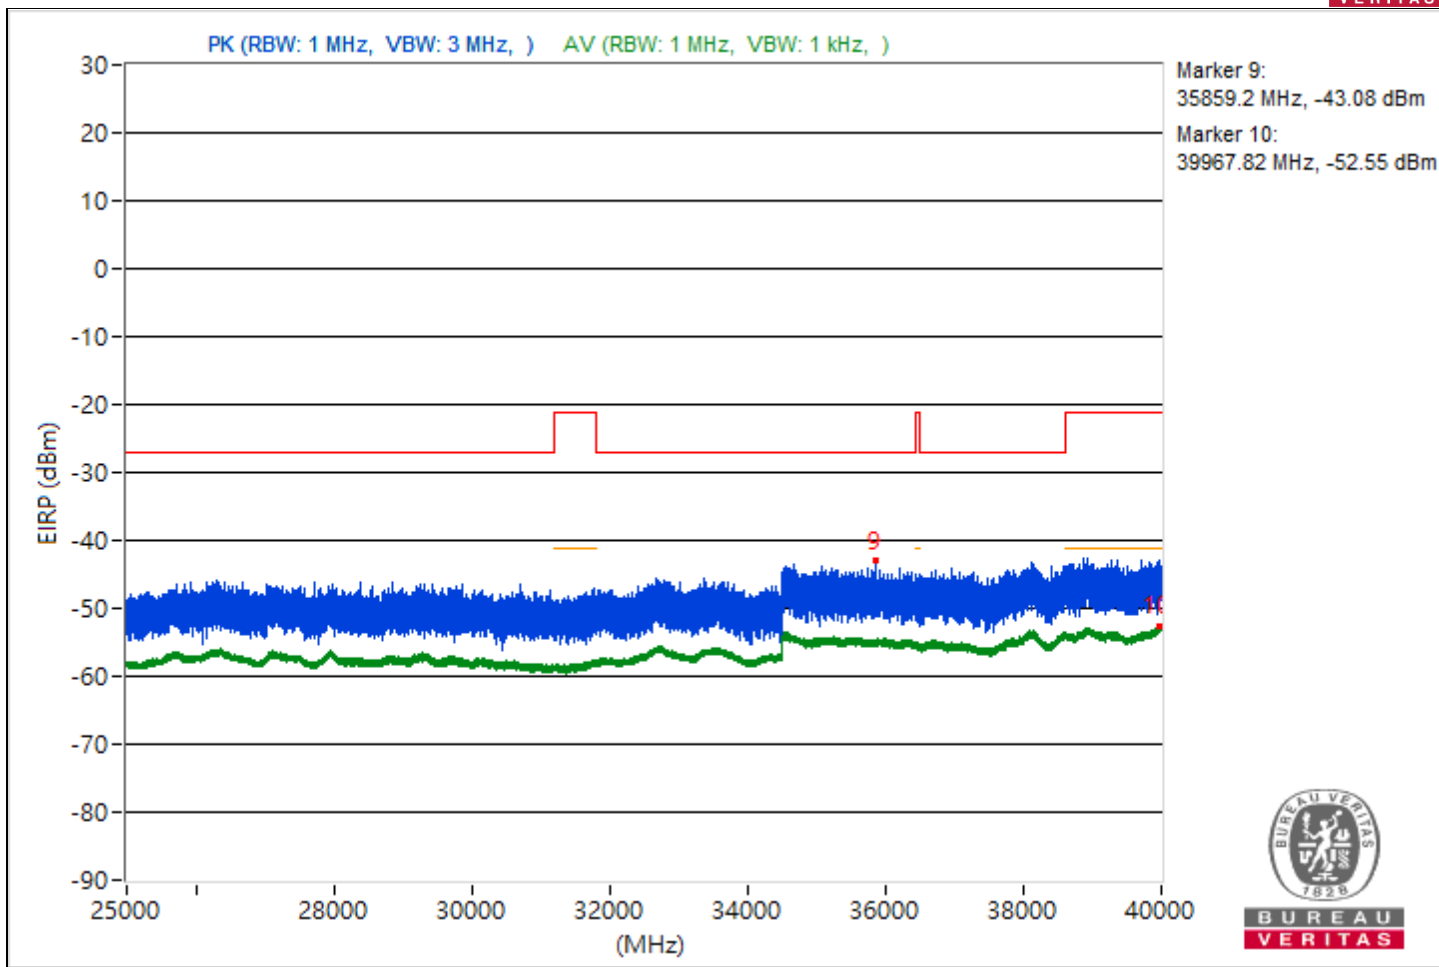



RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4474.1	54.87 PK	68.26	-13.39	-50.4	-46.92	4.92	-40.39
2	3835.54	47.29 AV	54	-6.71	-56.12	-55.69	4.92	-47.97
3	#9706.4	55.19 PK	68.26	-13.07	-51.91	-45.98	4.92	-40.07
4	8386.49	44.19 AV	54	-9.81	-58.59	-59.45	4.92	-51.07
5	#16809.6	55.69 PK	68.26	-12.57	-45.02	-53.93	4.92	-39.57
6	18749.1	46.11 AV	54	-7.89	-56.65	-57.55	4.92	-49.15
7	#24365.2	59.4 PK	68.26	-8.86	-41.92	-47.16	4.92	-35.86
8	23888.8	48.82 AV	54	-5.18	-54.12	-54.63	4.92	-46.44
9	#34524.36	51.82 PK	68.26	-16.44	-55.03	-49.41	4.92	-43.44
10	39956.71	42.58 AV	54	-11.42	-61.28	-60.02	4.92	-52.68

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

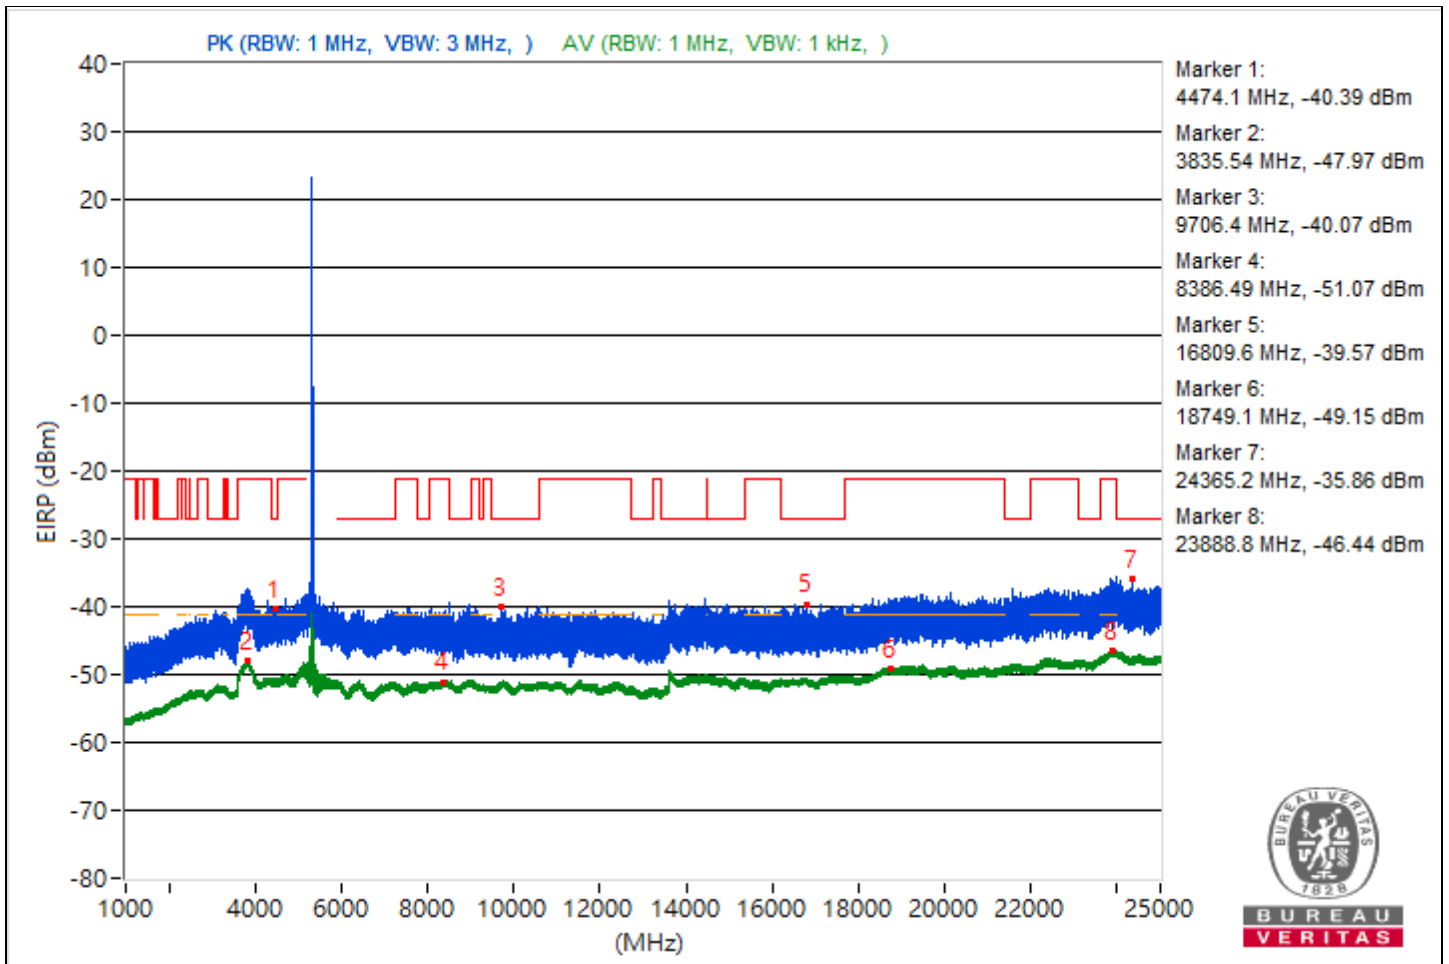

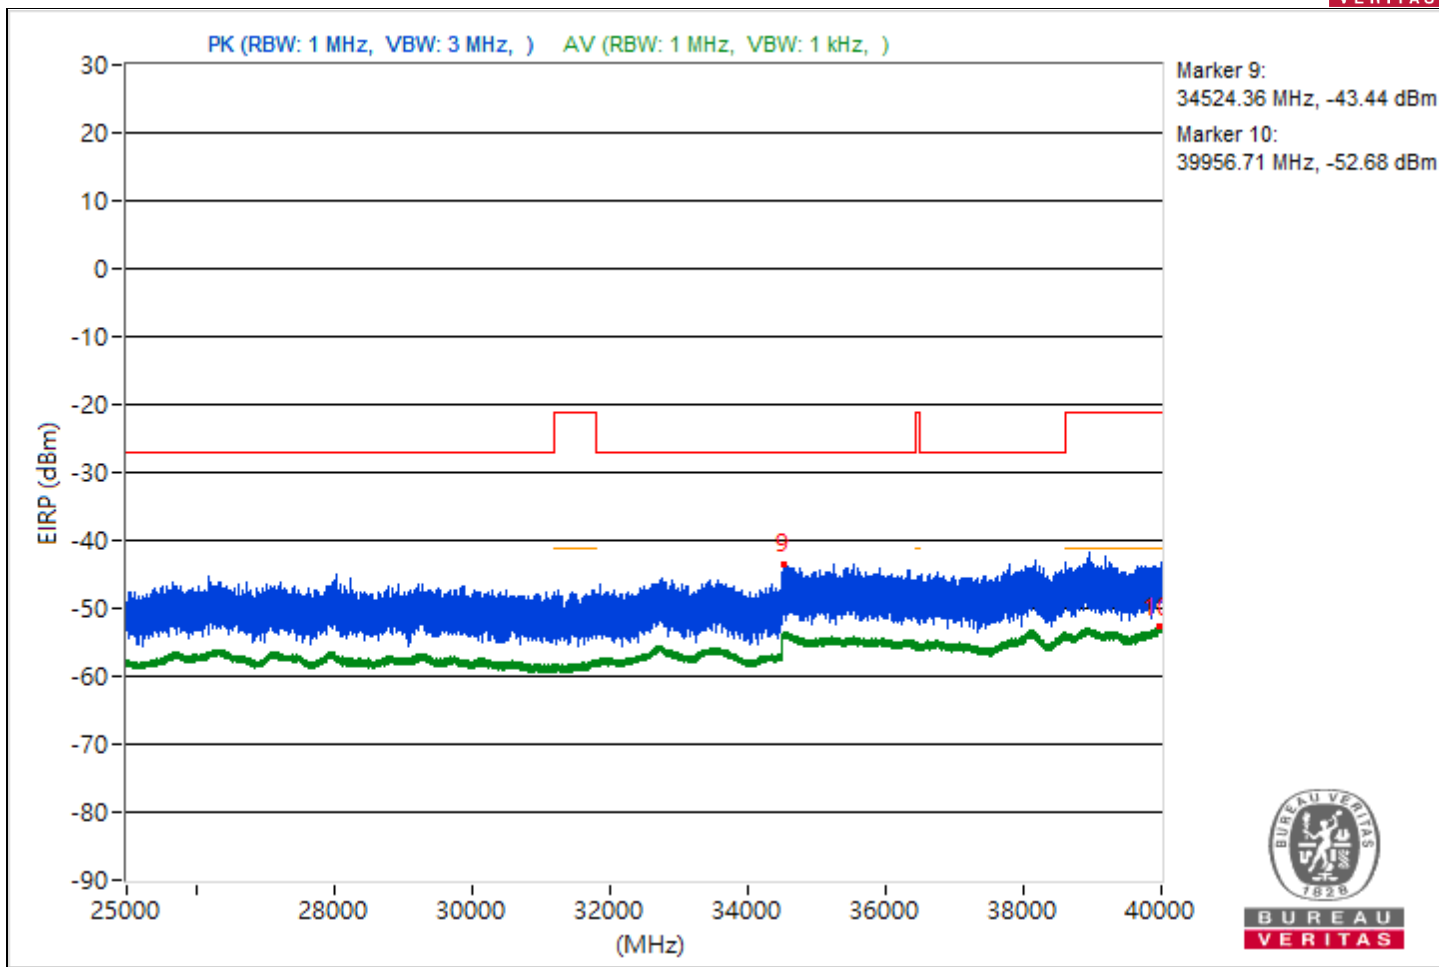



RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4459.32	55.28 PK	68.26	-12.98	-54.69	-45.38	4.92	-39.98
2	3824.66	47.27 AV	54	-6.73	-56.24	-55.63	4.92	-47.99
3	#5918.59	55.08 PK	68.26	-13.18	-50.55	-46.55	4.92	-40.18
4	8417.24	44.37 AV	54	-9.63	-59.12	-58.54	4.92	-50.89
5	#17417.4	55.75 PK	68.26	-12.51	-51.1	-45.49	4.92	-39.51
6	18991.9	46.28 AV	54	-7.72	-57.22	-56.62	4.92	-48.98
7	#24894.5	59.09 PK	68.26	-9.17	-43.03	-45.53	4.92	-36.17
8	23923	48.78 AV	54	-5.22	-54.75	-54.09	4.92	-46.48
9	#34513.42	52.52 PK	68.26	-15.74	-49.13	-53.09	4.92	-42.74
10	39988.44	42.69 AV	54	-11.31	-60.65	-60.36	4.92	-52.57

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

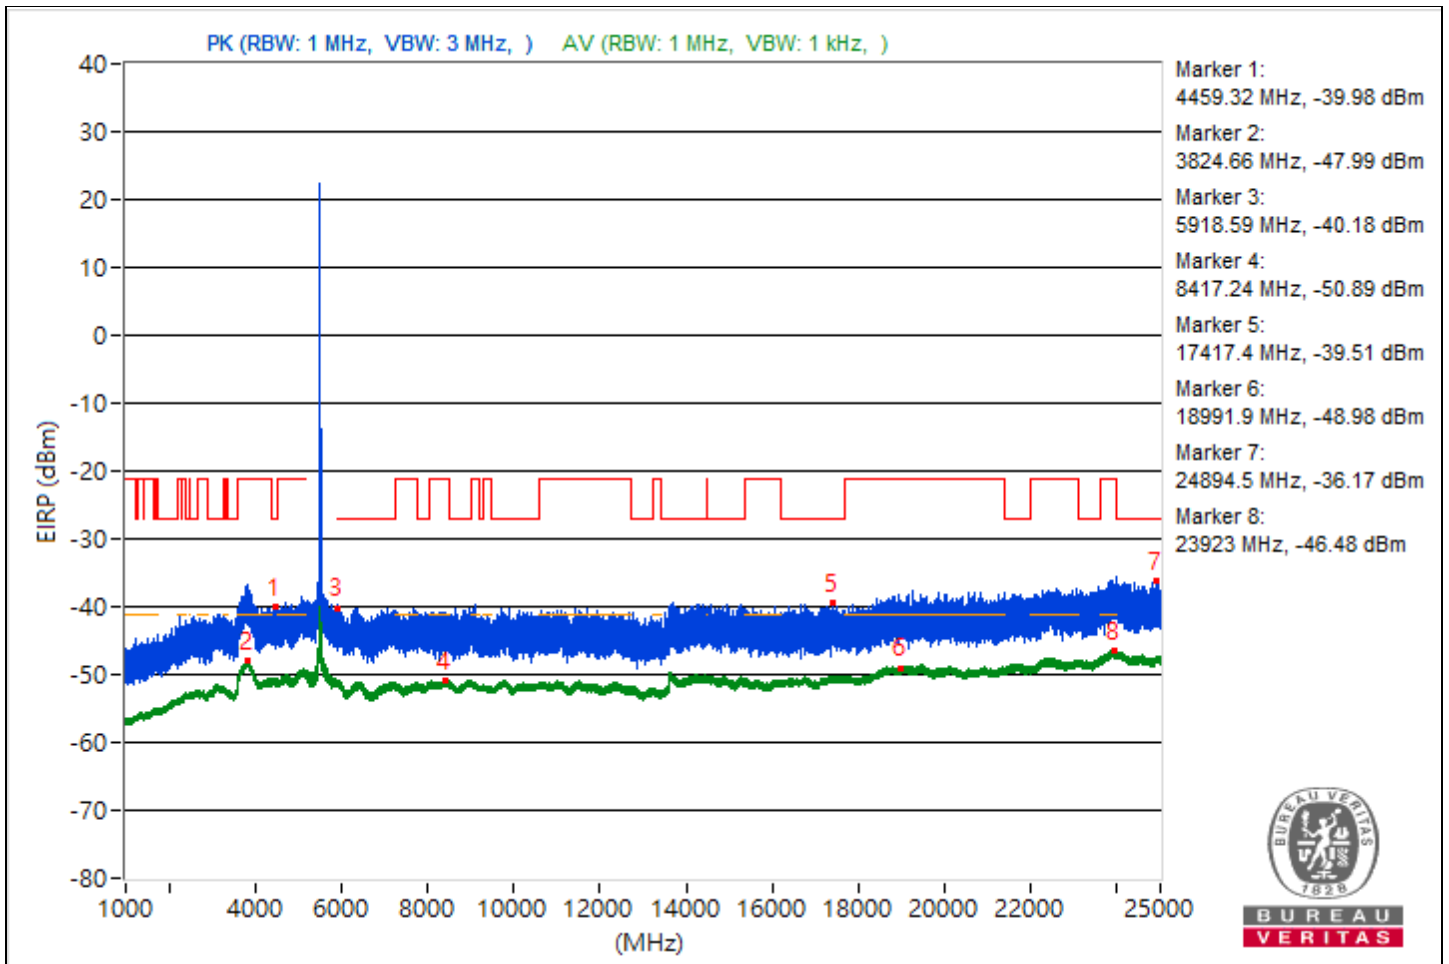

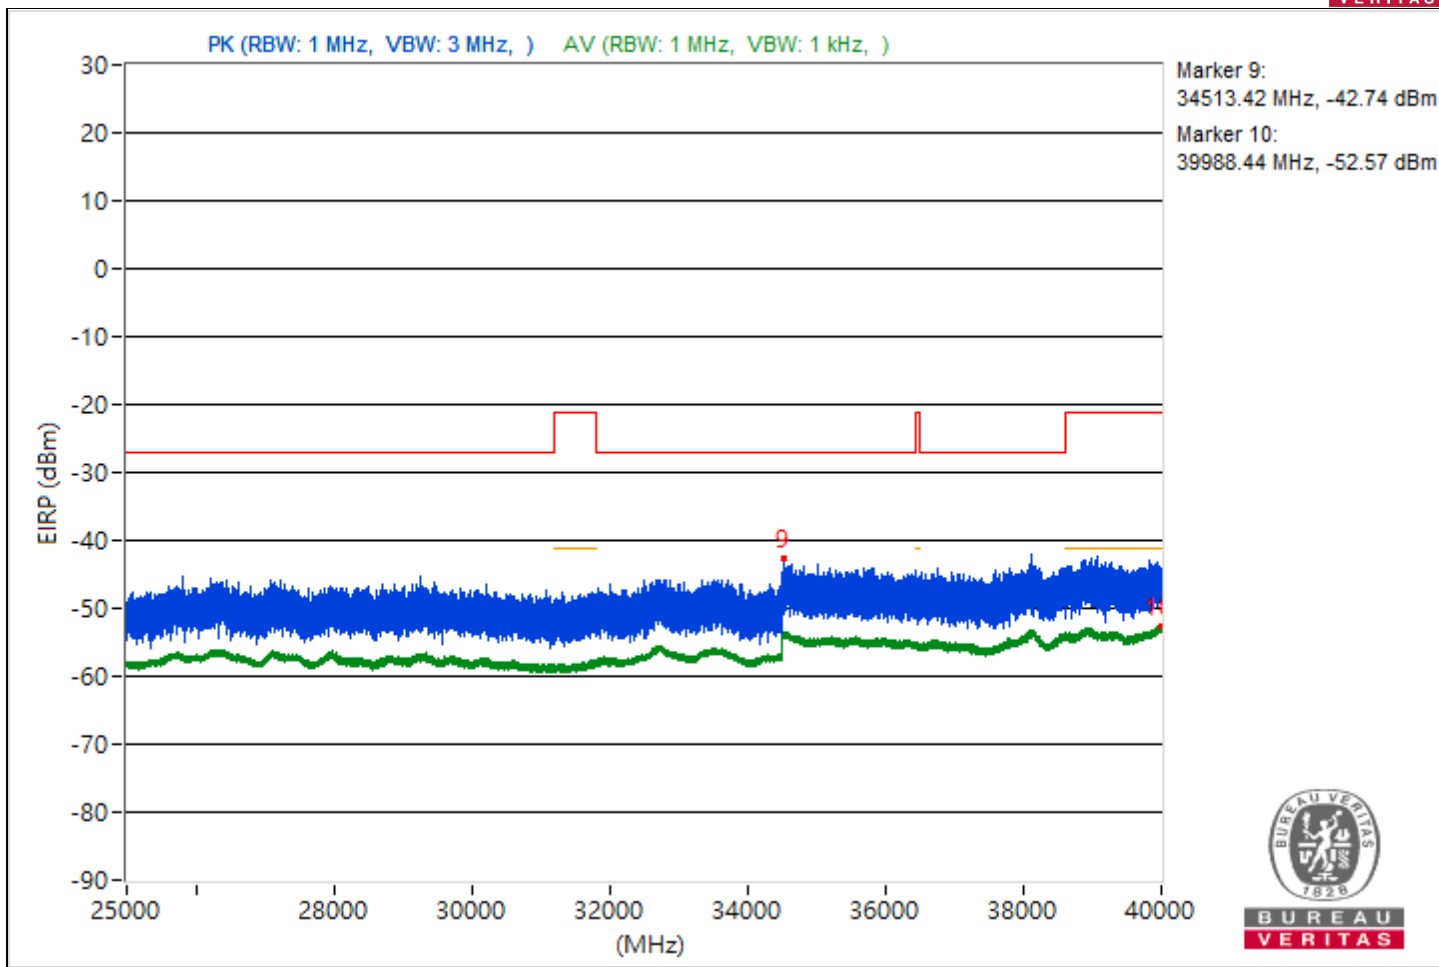



RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4470.44	54.77 PK	68.26	-13.49	-52.29	-46.41	4.92	-40.49
2	3809.02	47.19 AV	54	-6.81	-56.48	-55.57	4.92	-48.07
3	#7979.31	55.35 PK	68.26	-12.91	-50.98	-46.04	4.92	-39.91
4	8398.76	44.45 AV	54	-9.55	-58.39	-59.11	4.92	-50.81
5	#14053.33	56.59 PK	68.26	-11.67	-44.75	-49.91	4.92	-38.67
6	18748	46.46 AV	54	-7.54	-56.56	-56.91	4.92	-48.8
7	#24175.4	59.29 PK	68.26	-8.97	-45.11	-42.96	4.92	-35.97
8	23868.2	48.97 AV	54	-5.03	-54.32	-54.13	4.92	-46.29
9	#35768.53	52.23 PK	68.26	-16.03	-55.48	-48.8	4.92	-43.03
10	39997.51	42.7 AV	54	-11.3	-60.13	-60.89	4.92	-52.56

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

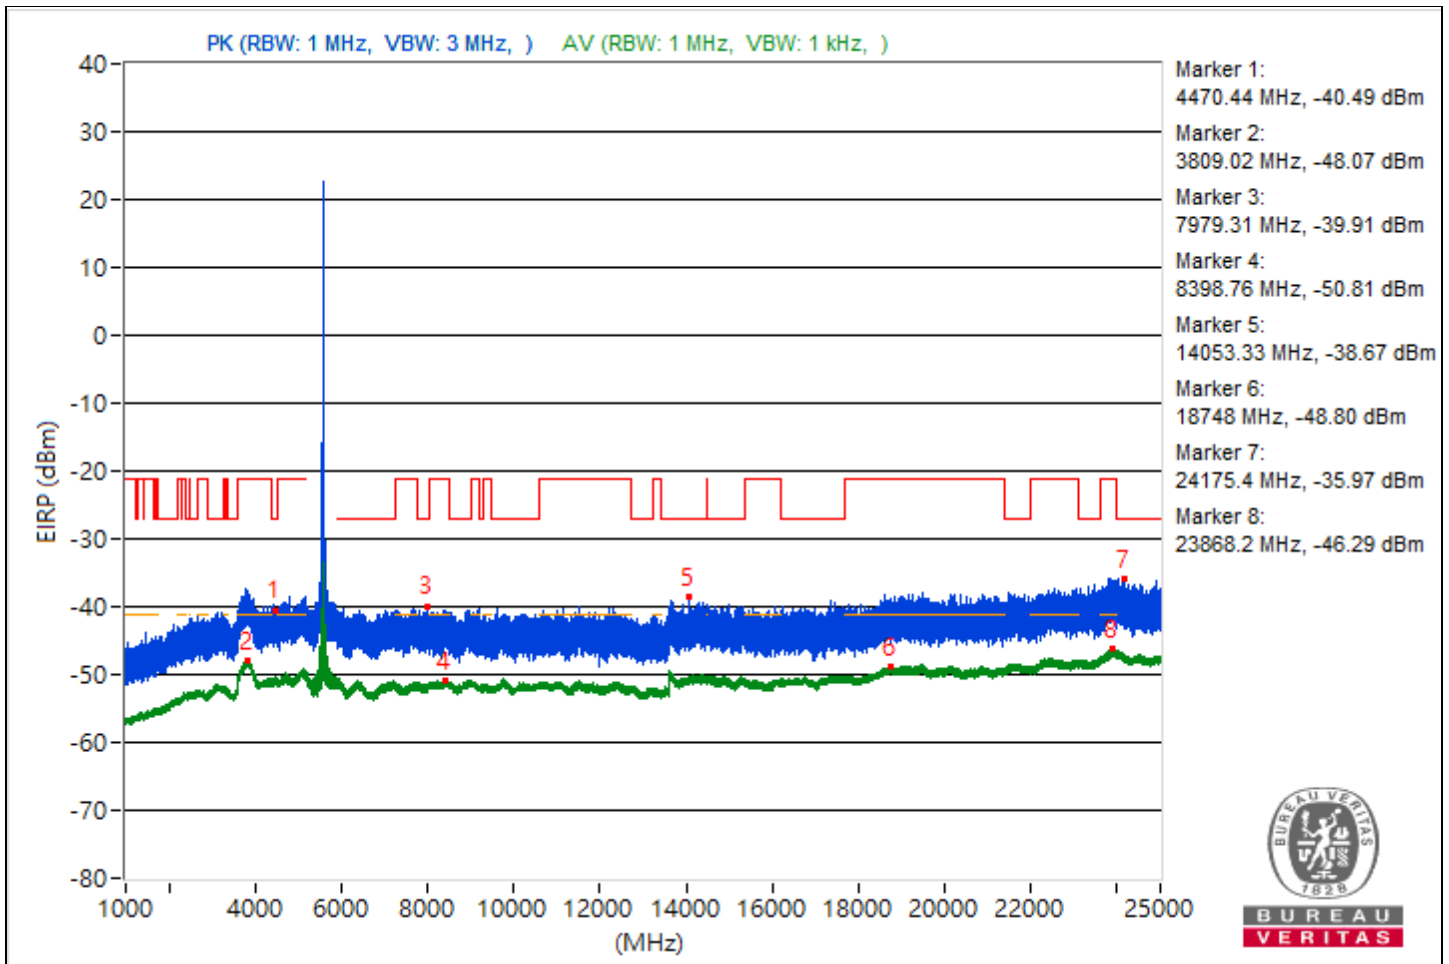

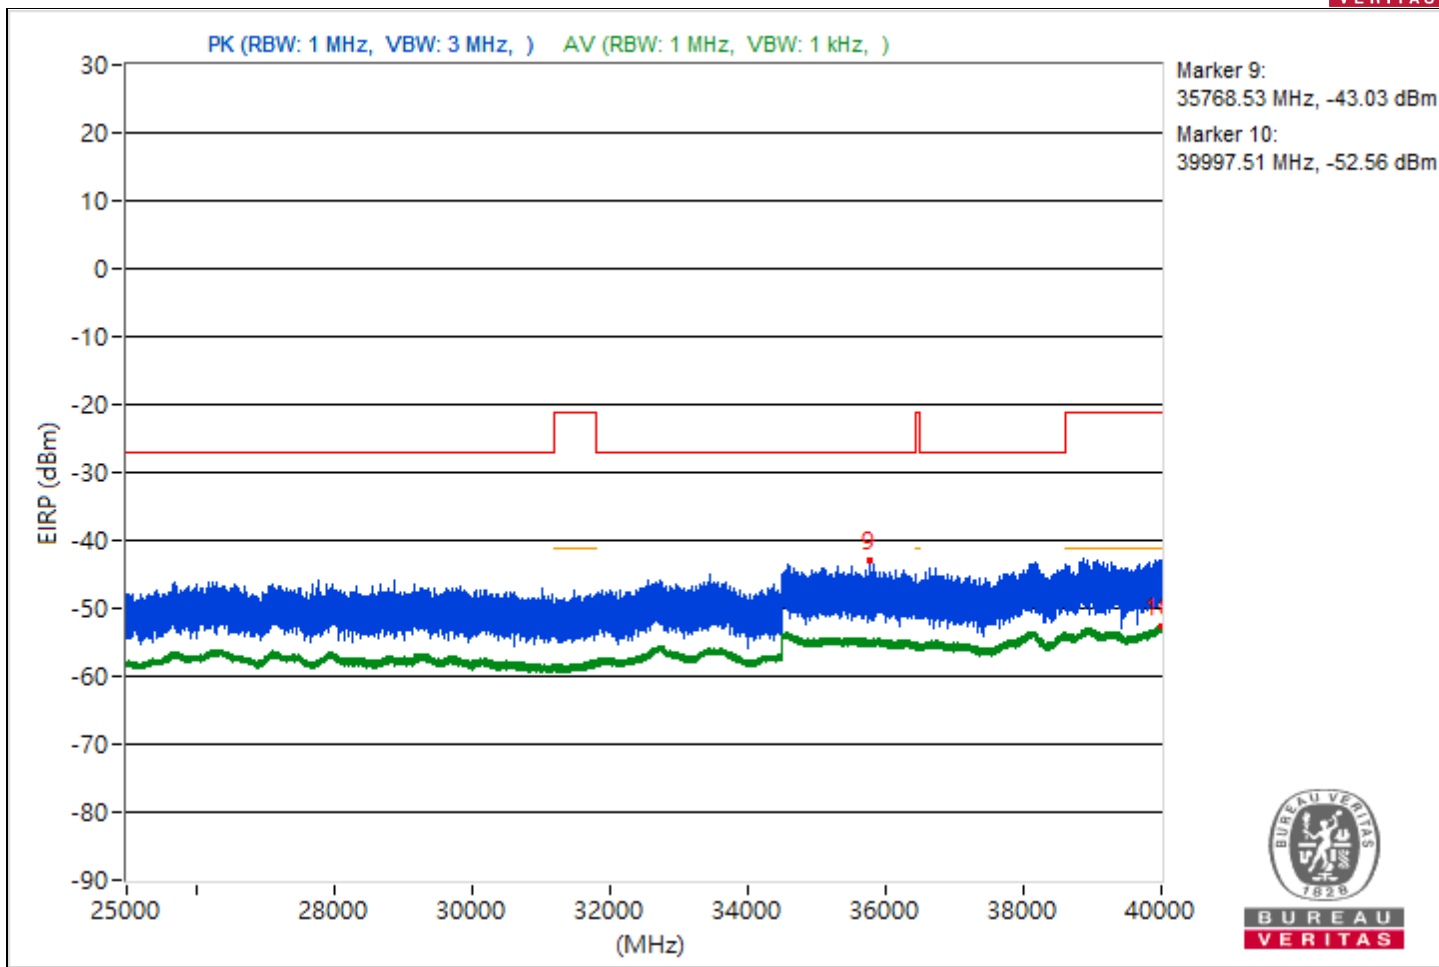



RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4462.82	54.78 PK	68.26	-13.48	-47.13	-50.24	4.92	-40.48
2	3785.61	47.23 AV	54	-6.77	-55.55	-56.41	4.92	-48.03
3	#5922.94	55.49 PK	68.26	-12.77	-49.78	-46.31	4.92	-39.77
4	8393.16	44.5 AV	54	-9.5	-58.48	-58.9	4.92	-50.76
5	#17426.3	55.58 PK	68.26	-12.68	-45.66	-51.25	4.92	-39.68
6	18607.8	46.21 AV	54	-7.79	-57.29	-56.69	4.92	-49.05
7	#24396	58.33 PK	68.26	-9.93	-49.16	-42.75	4.92	-36.93
8	23897.8	48.82 AV	54	-5.18	-54.97	-53.85	4.92	-46.44
9	#38566.13	51.82 PK	68.26	-16.44	-49.77	-53.93	4.92	-43.44
10	39990.04	42.84 AV	54	-11.16	-60.16	-60.55	4.92	-52.42

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

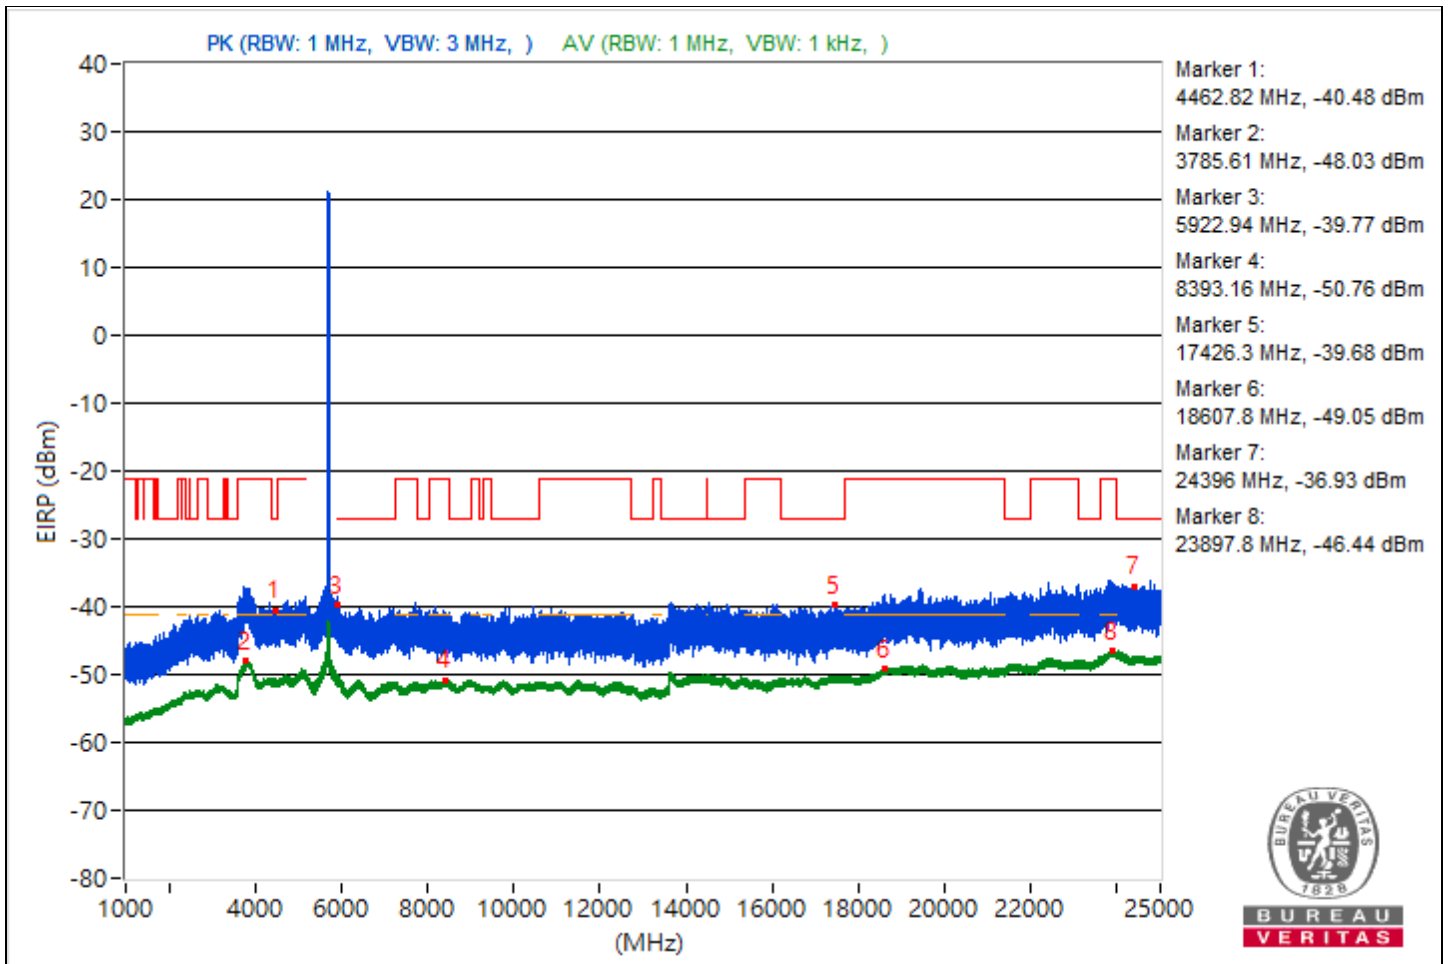

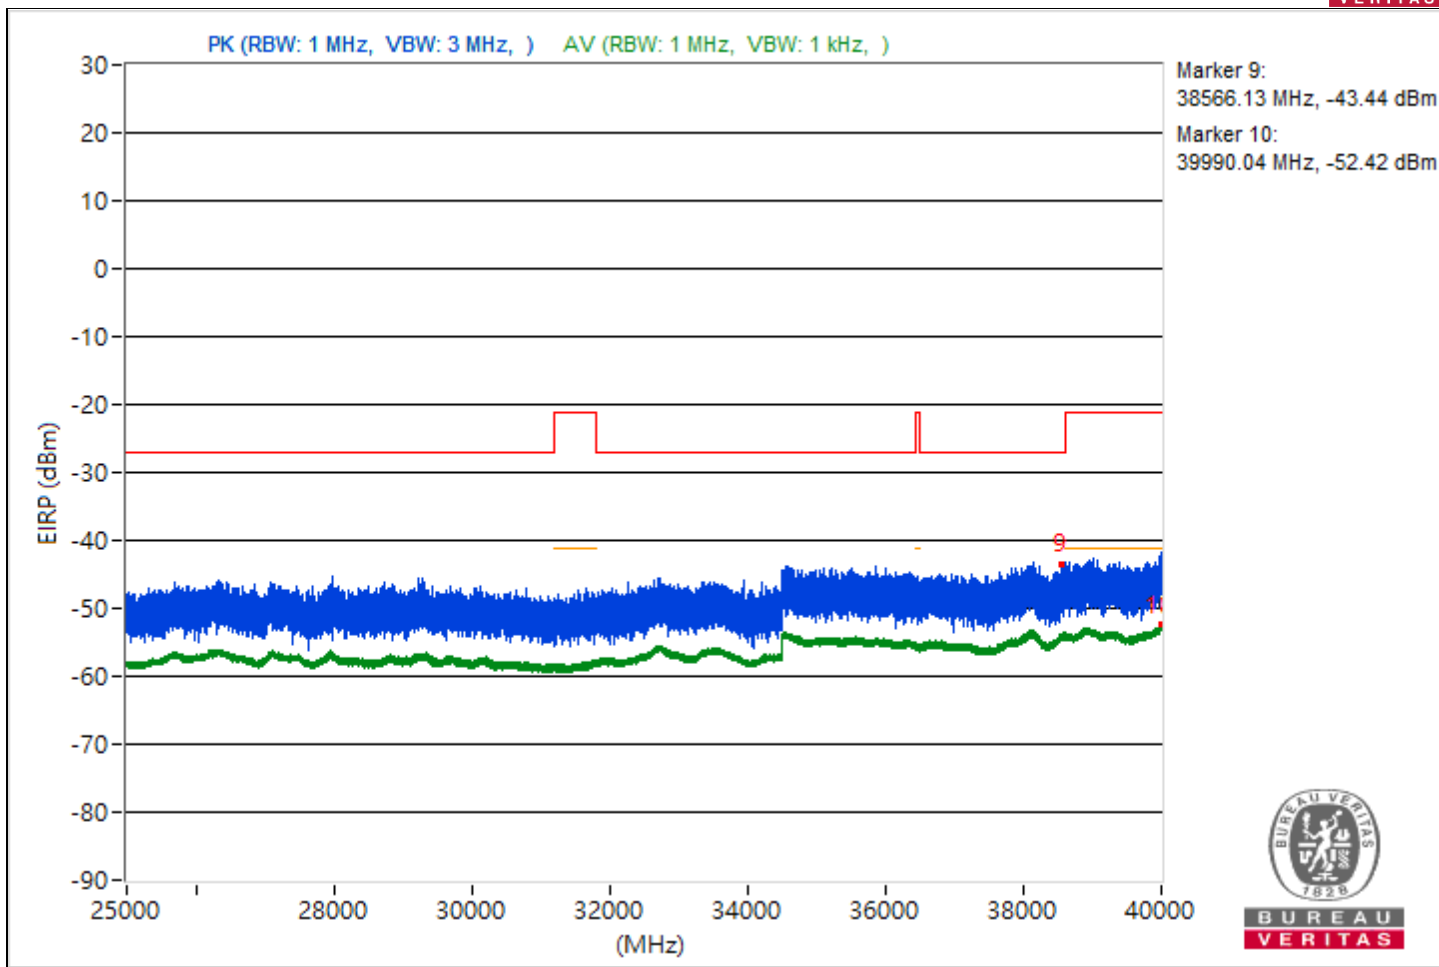



RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4424.01	55.21 PK	68.26	-13.05	-52.33	-45.86	4.92	-40.05
2	3825.04	47.32 AV	54	-6.68	-56.22	-55.54	4.92	-47.94
3	#10567.29	54.65 PK	68.26	-13.61	-51.51	-46.79	4.92	-40.61
4	8455.64	44.32 AV	54	-9.68	-58.67	-59.08	4.92	-50.94
5	#14514.49	56.13 PK	68.26	-12.13	-45.48	-49.57	4.92	-39.13
6	18745.9	46.27 AV	54	-7.73	-56.59	-57.28	4.92	-48.99
7	#24027.2	59.22 PK	68.26	-9.04	-42.1	-47.33	4.92	-36.04
8	23946.4	48.67 AV	54	-5.33	-54.18	-54.88	4.92	-46.59
9	#38231.64	52.52 PK	68.26	-15.74	-53.43	-49	4.92	-42.74
10	39962.58	42.55 AV	54	-11.45	-61.09	-60.23	4.92	-52.71

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

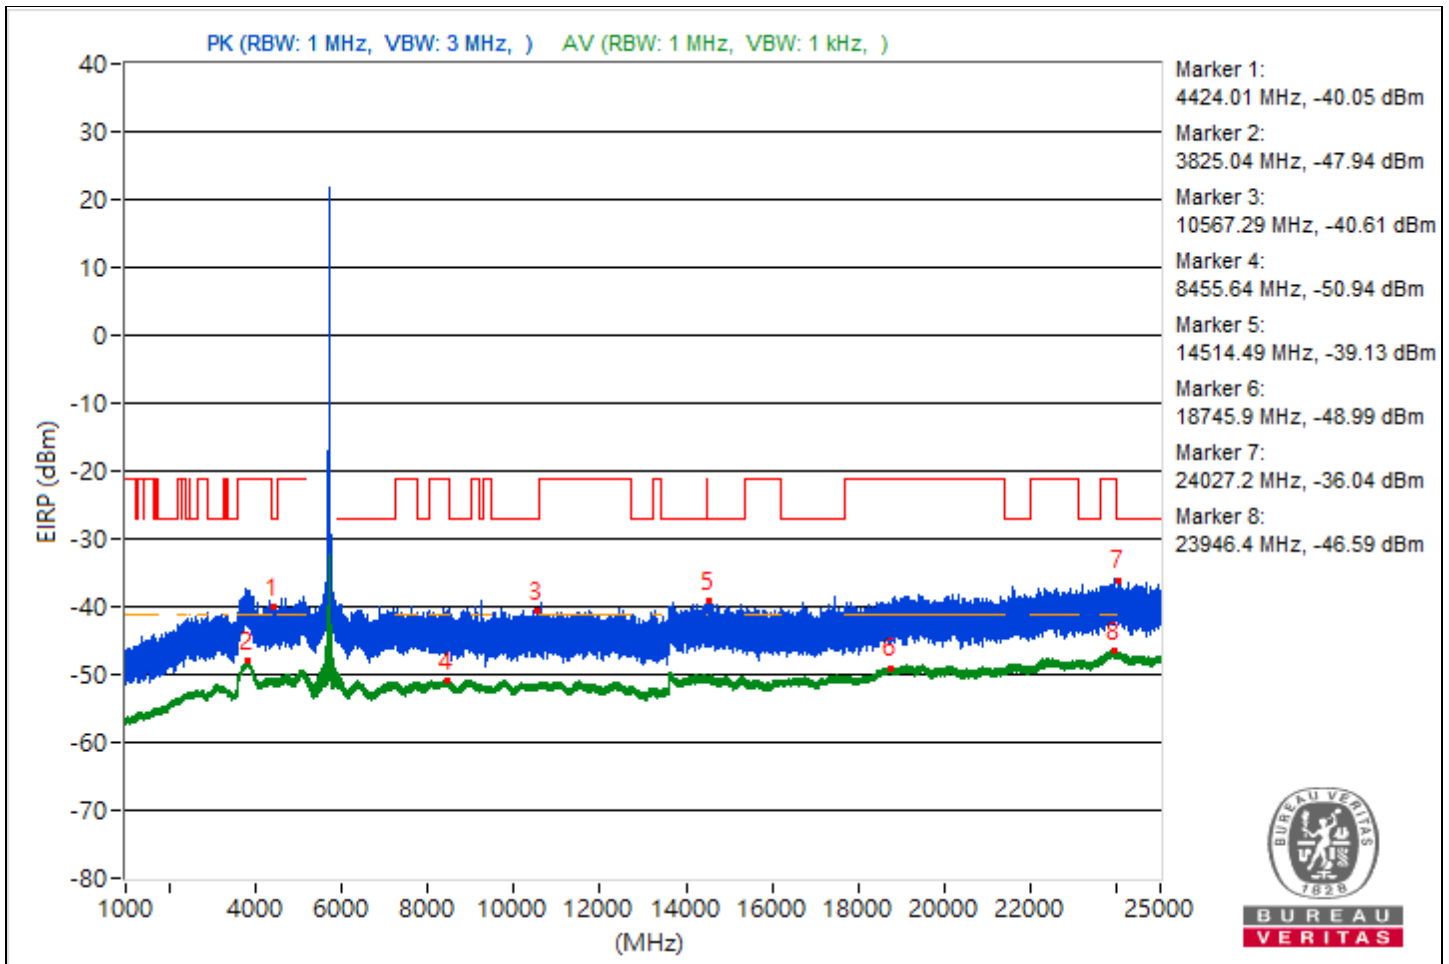

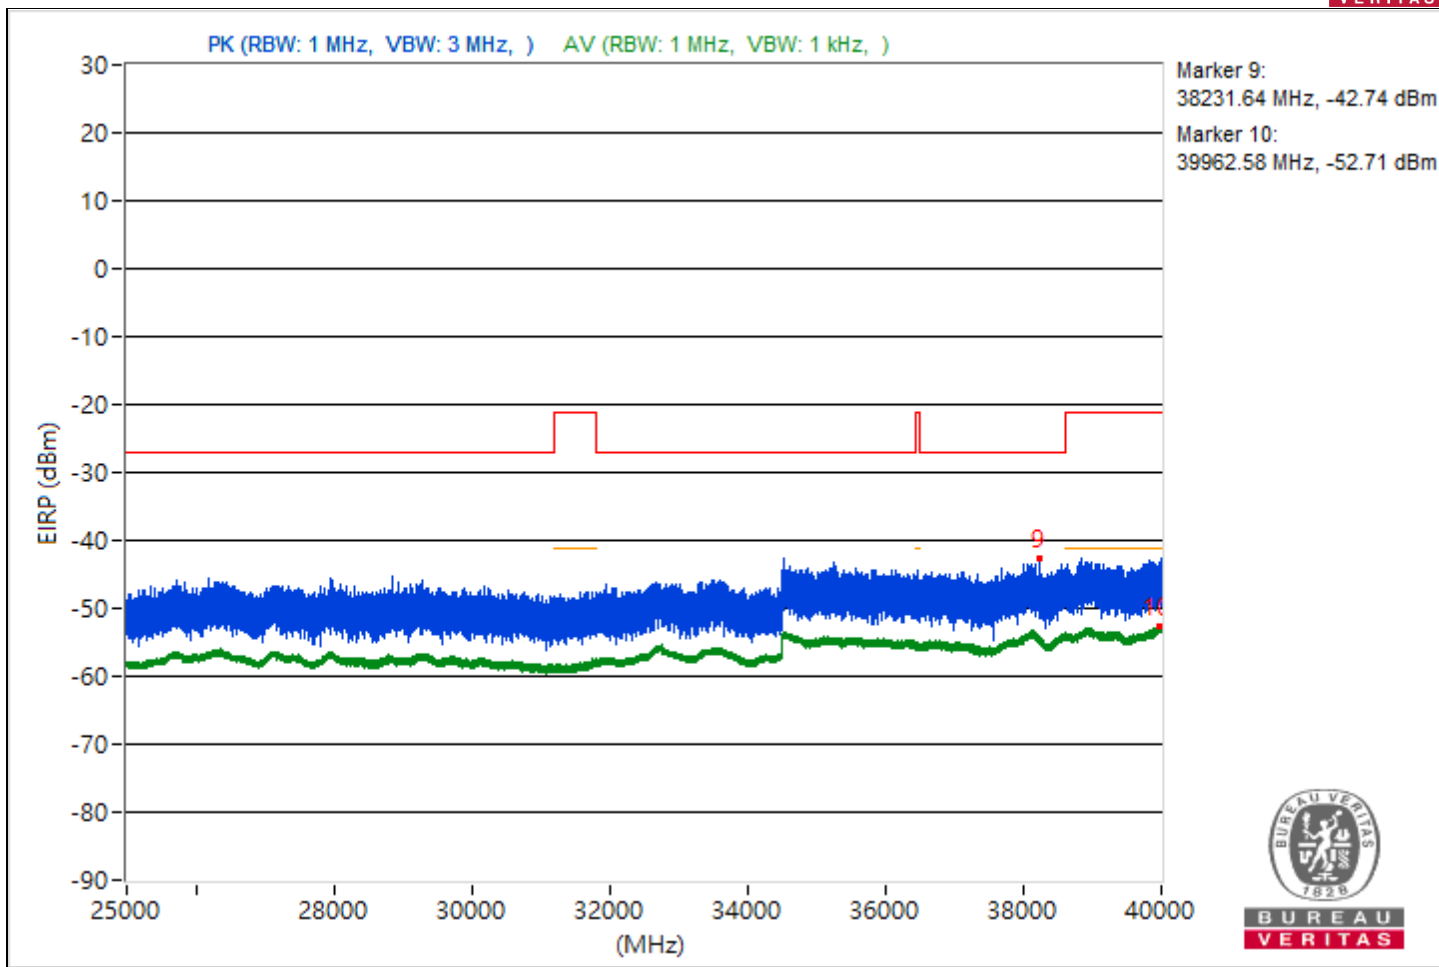



RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4404.88	55.8 PK	68.26	-12.46	-48.63	-46.43	4.92	-39.46
2	3849.16	47.43 AV	54	-6.57	-55.53	-56	4.92	-47.83
3	#7209.08	55.42 PK	68.26	-12.84	-51.63	-45.76	4.92	-39.84
4	9025.78	44.4 AV	54	-9.6	-59.54	-58.15	4.92	-50.86
5	#17300.6	55.78 PK	68.26	-12.48	-45.75	-50.15	4.92	-39.48
6	18984.3	46.32 AV	54	-7.68	-57.24	-56.52	4.92	-48.94
7	#24042.3	60.18 PK	68.26	-8.08	-42.79	-43.25	4.92	-35.08
8	23890.3	48.88 AV	54	-5.12	-54.04	-54.6	4.92	-46.38
9	#38513.78	51.53 PK	68.26	-16.73	-49.85	-54.8	4.92	-43.73
10	39991.64	42.81 AV	54	-11.19	-59.99	-60.81	4.92	-52.45

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

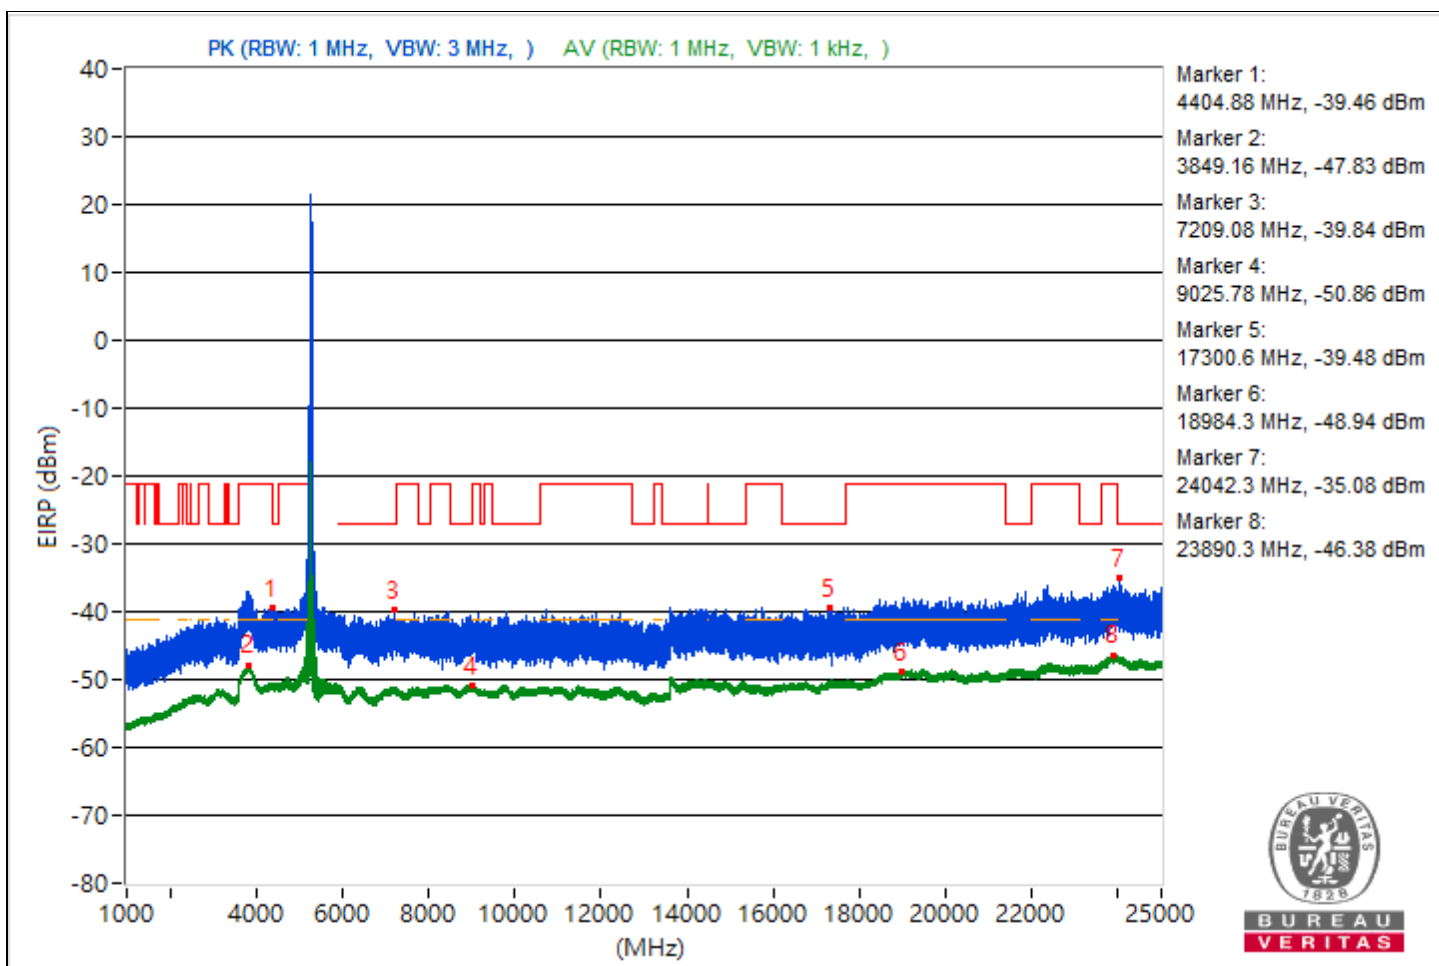

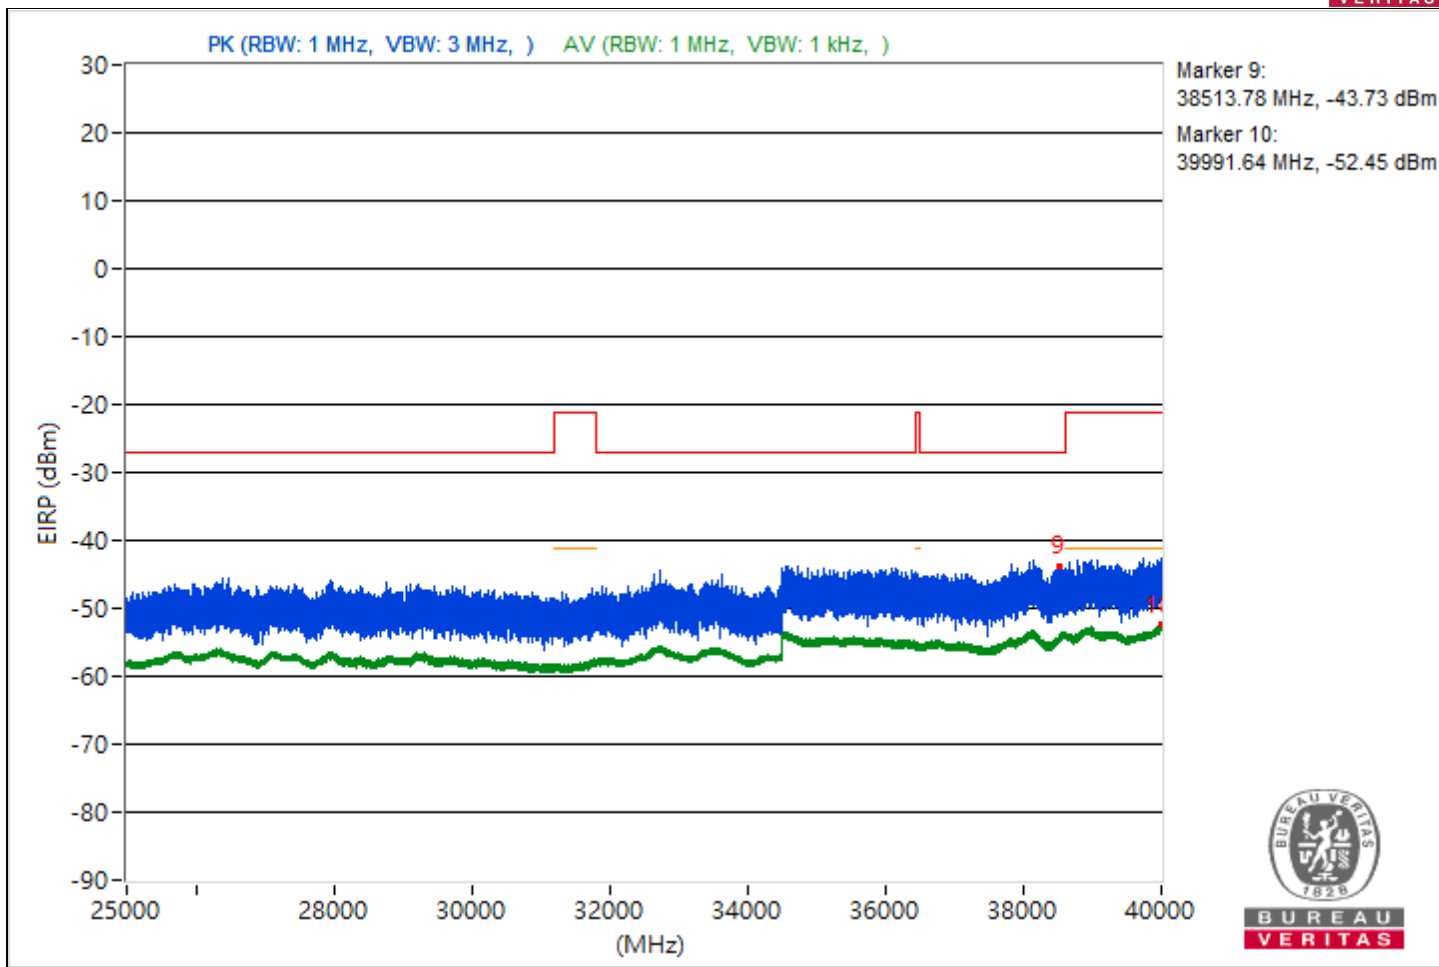



RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4400.99	55.43 PK	68.26	-12.83	-51.74	-45.72	4.92	-39.83
2	3830.57	47.39 AV	54	-6.61	-55.55	-56.06	4.92	-47.87
3	#7002.73	55.3 PK	68.26	-12.96	-46.06	-51.12	4.92	-39.96
4	11526.22	44.25 AV	54	-9.75	-58.54	-59.4	4.92	-51.01
5	#13638.31	55.79 PK	68.26	-12.47	-52.18	-45.18	4.92	-39.47
6	18978.5	46.12 AV	54	-7.88	-56.61	-57.58	4.92	-49.14
7	#24952.9	58.68 PK	68.26	-9.58	-50.02	-42.16	4.92	-36.58
8	23925.9	48.69 AV	54	-5.31	-54.85	-54.17	4.92	-46.57
9	#38183.02	52.4 PK	68.26	-15.86	-53.65	-49.08	4.92	-42.86
10	39995.91	42.75 AV	54	-11.25	-60.31	-60.57	4.92	-52.51

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

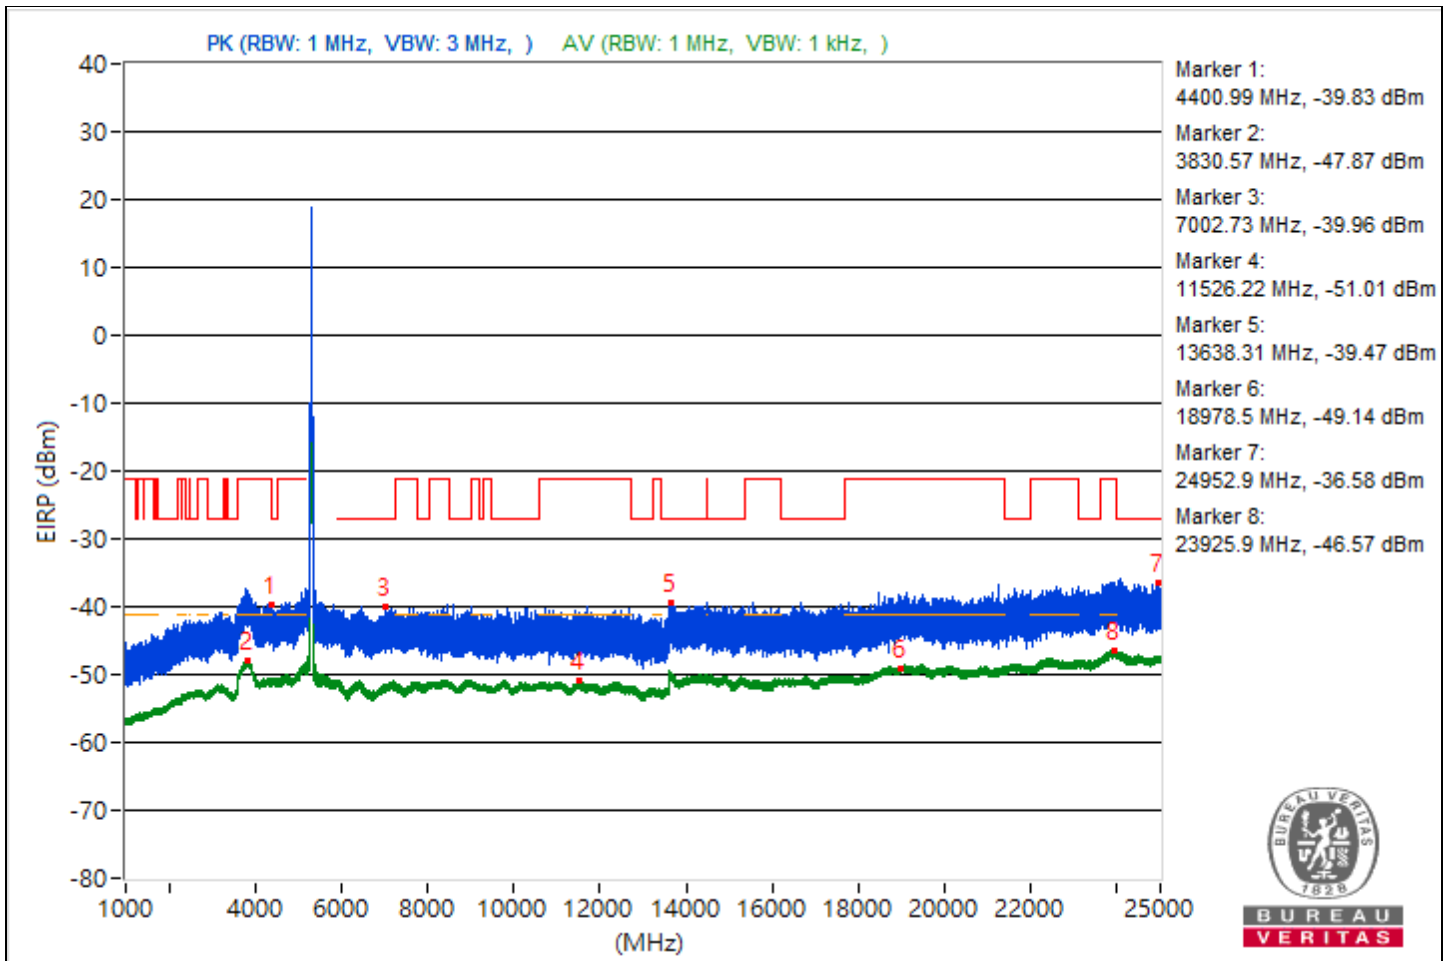

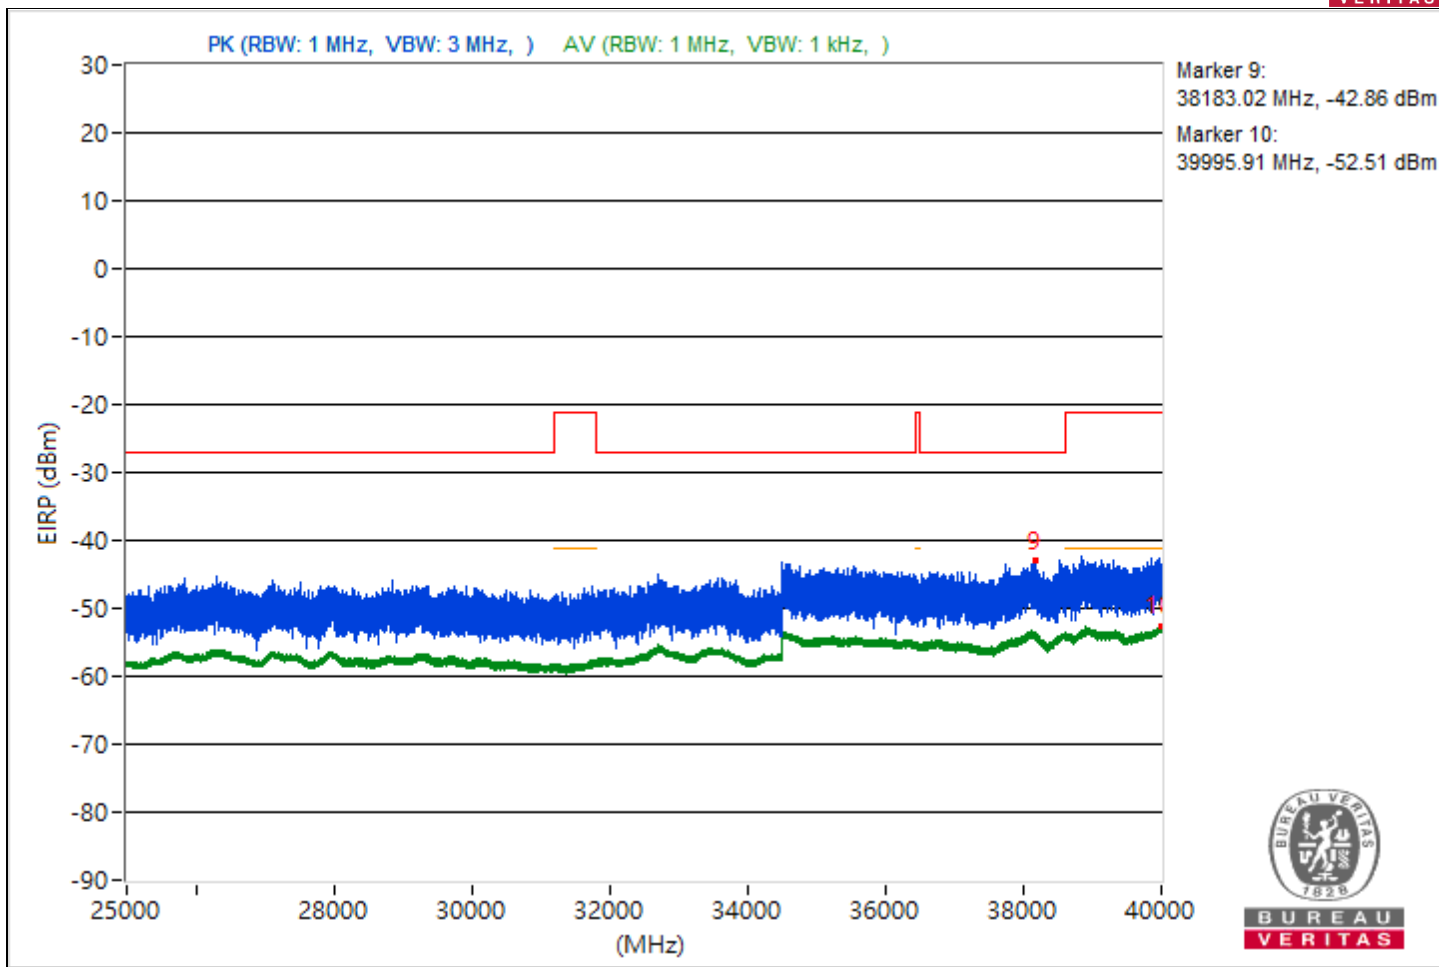



RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3085.3	55.07 PK	68.26	-13.19	-50.89	-46.45	4.92	-40.19
2	3834.3	47.56 AV	54	-6.44	-55.86	-55.4	4.92	-47.7
3	#7196.94	55.3 PK	68.26	-12.96	-50.06	-46.46	4.92	-39.96
4	9008.8	44.31 AV	54	-9.69	-58.68	-59.08	4.92	-50.95
5	#14457.33	56.26 PK	68.26	-12	-44.79	-51.34	4.92	-39
6	18985.1	46.25 AV	54	-7.75	-57.29	-56.61	4.92	-49.01
7	#24203	59.31 PK	68.26	-8.95	-45.81	-42.55	4.92	-35.95
8	23954.6	48.73 AV	54	-5.27	-54.99	-54	4.92	-46.53
9	#38139.73	51.71 PK	68.26	-16.55	-49.79	-54.31	4.92	-43.55
10	39984.8	42.64 AV	54	-11.36	-60.82	-60.29	4.92	-52.62

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

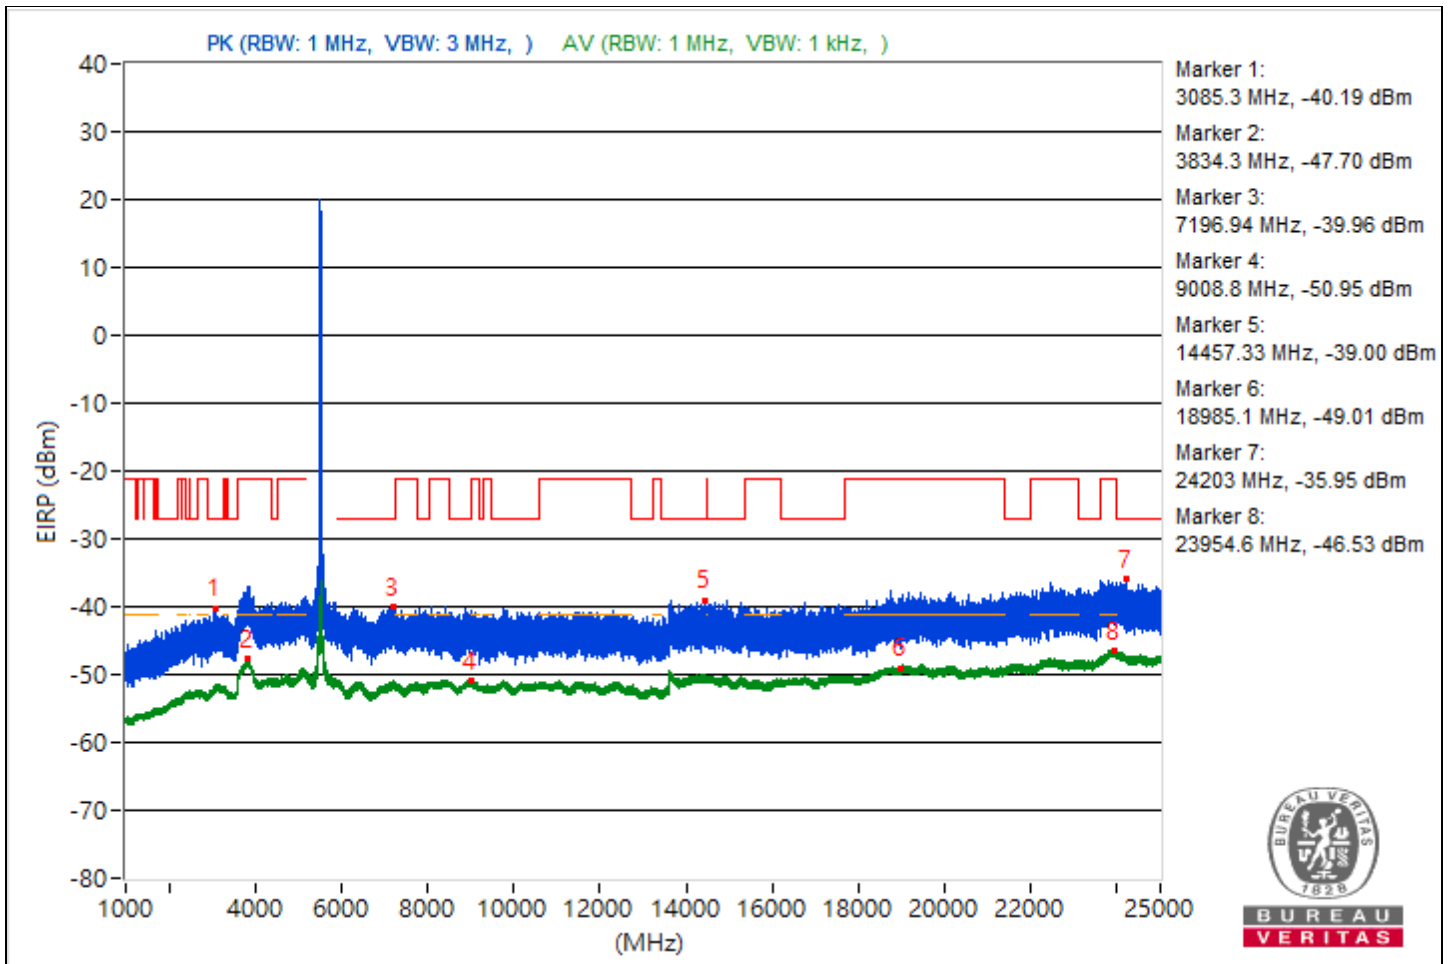

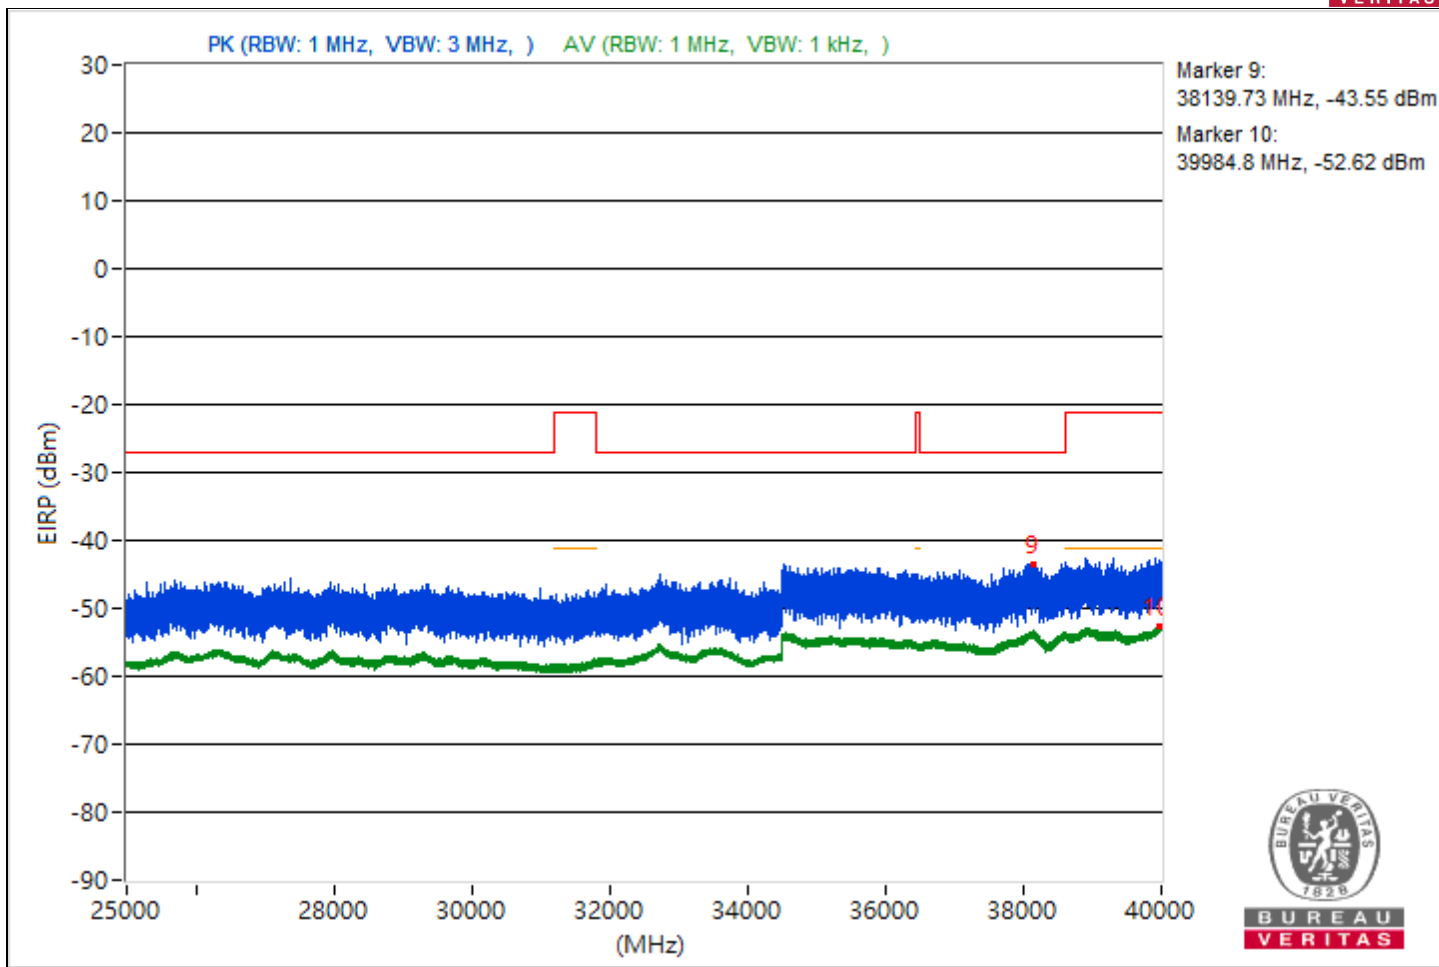



RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4416.54	54.7 PK	68.26	-13.56	-46.44	-52.51	4.92	-40.56
2	3791.99	47.2 AV	54	-6.8	-55.59	-56.44	4.92	-48.06
3	#6960.34	55.18 PK	68.26	-13.08	-49.64	-46.83	4.92	-40.08
4	8396.18	44.28 AV	54	-9.72	-58.58	-59.27	4.92	-50.98
5	#17592.5	55.86 PK	68.26	-12.4	-45.1	-52.16	4.92	-39.4
6	18994.8	46.34 AV	54	-7.66	-56.56	-57.17	4.92	-48.92
7	#24600	58.95 PK	68.26	-9.31	-42.16	-48.41	4.92	-36.31
8	23885.6	48.85 AV	54	-5.15	-54.46	-54.22	4.92	-46.41
9	#38552.09	51.94 PK	68.26	-16.32	-49.58	-54.01	4.92	-43.32
10	39992.98	42.79 AV	54	-11.21	-60.25	-60.56	4.92	-52.47

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

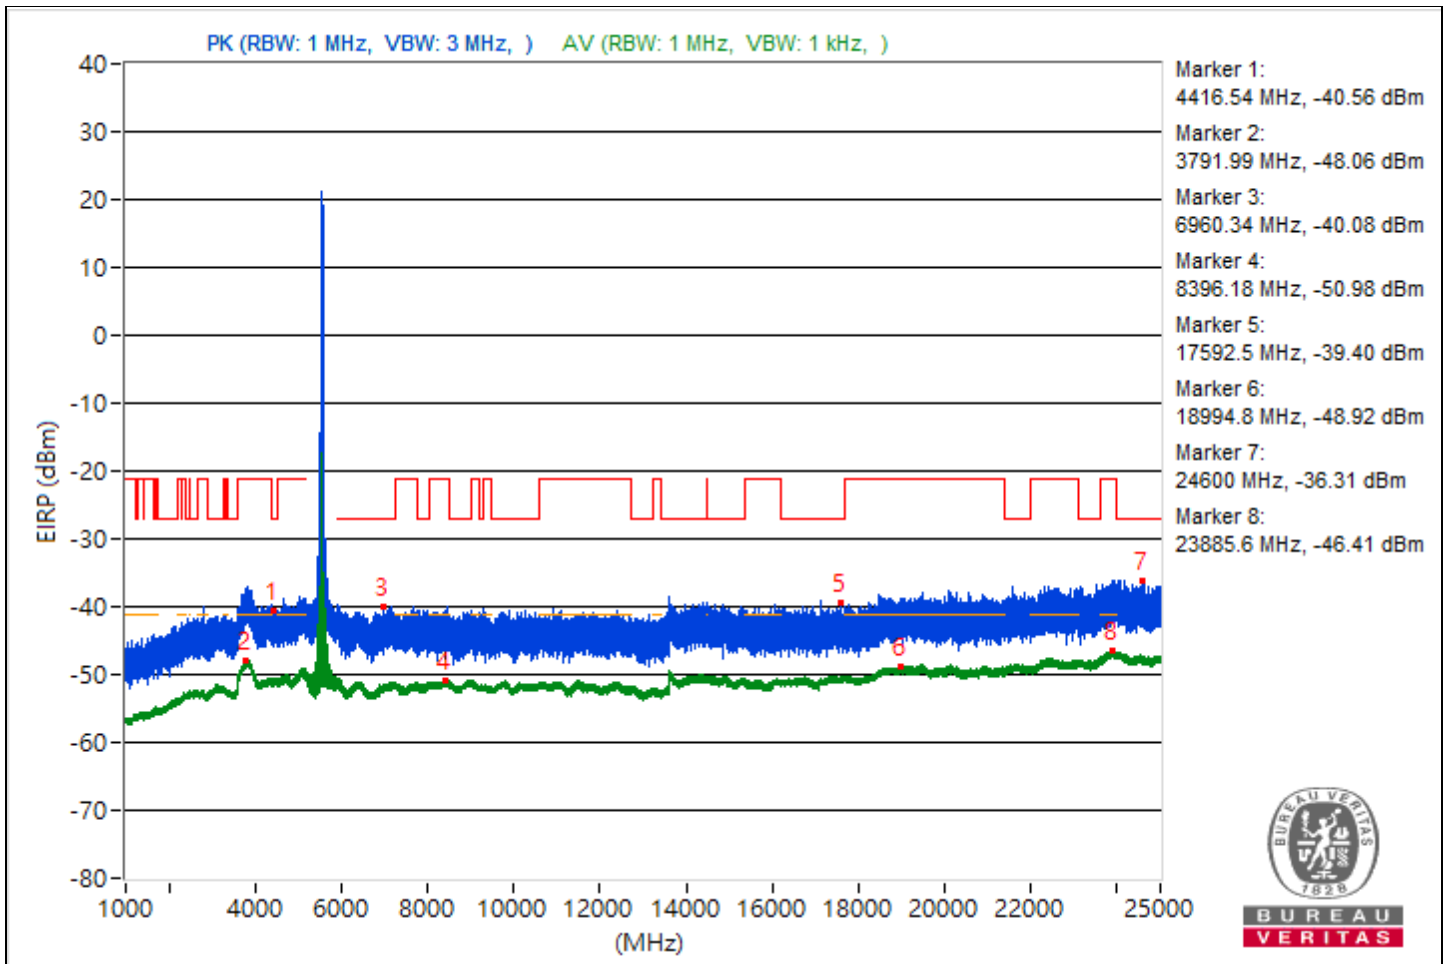

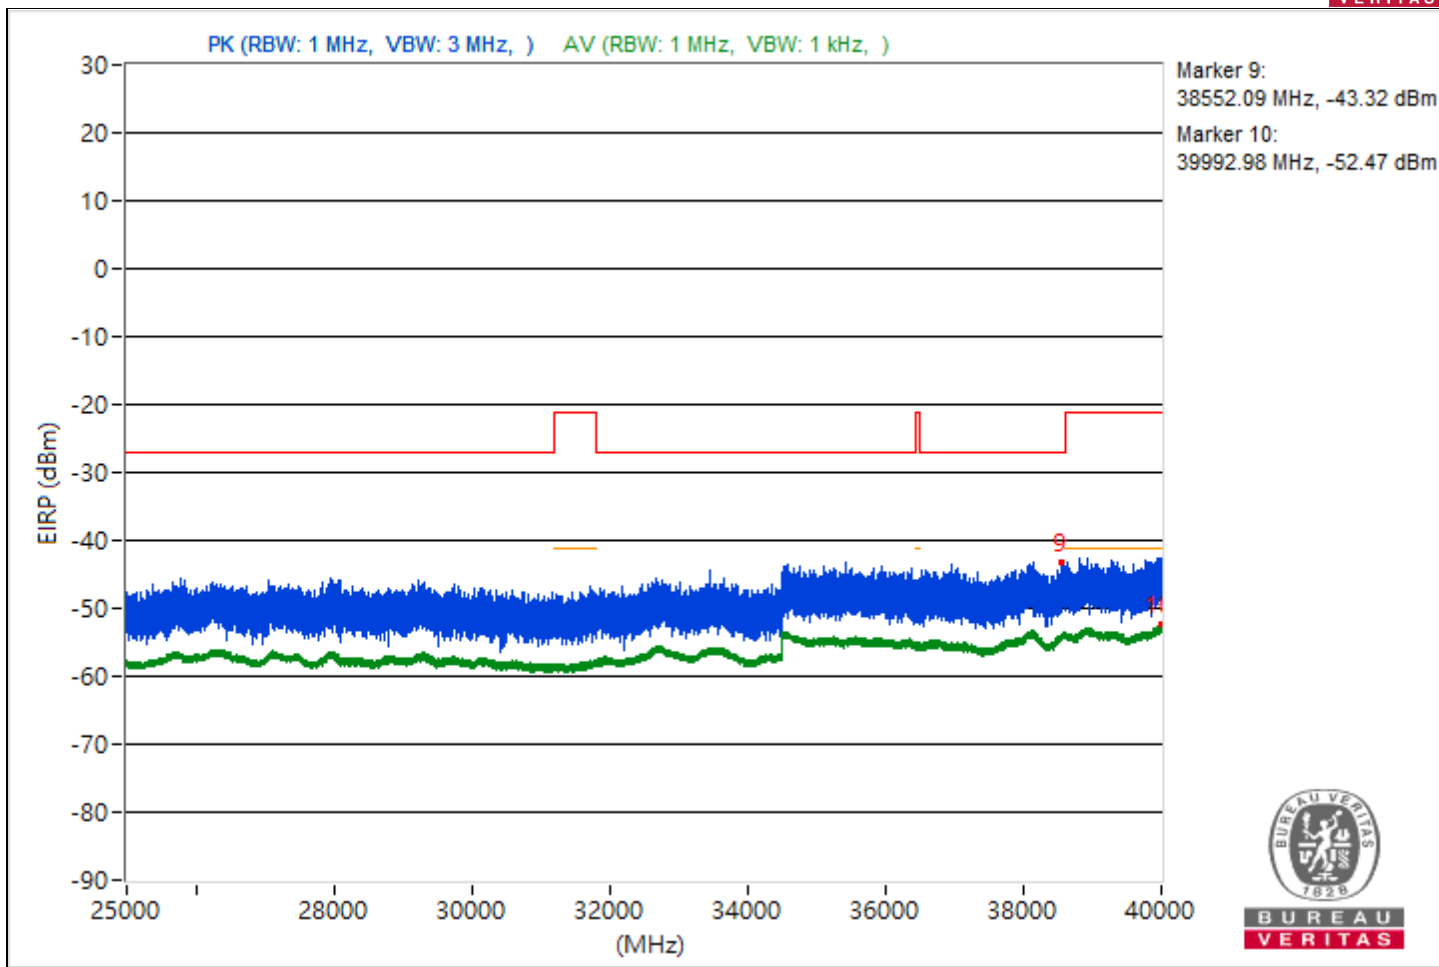



RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4495.64	55.85 PK	68.26	-12.41	-45.72	-49.95	4.92	-39.41
2	3840.83	47.35 AV	54	-6.65	-55.57	-56.13	4.92	-47.91
3	#8906.22	56.06 PK	68.26	-12.2	-50.67	-45.2	4.92	-39.2
4	8372.98	44.23 AV	54	-9.77	-59.37	-58.6	4.92	-51.03
5	#14312.36	55.37 PK	68.26	-12.89	-45.55	-52.87	4.92	-39.89
6	18981.6	46.32 AV	54	-7.68	-56.69	-57.05	4.92	-48.94
7	#24126.6	59.23 PK	68.26	-9.03	-46.62	-42.32	4.92	-36.03
8	23889.6	48.78 AV	54	-5.22	-54.81	-54.04	4.92	-46.48
9	#38115.11	52.47 PK	68.26	-15.79	-55.04	-48.6	4.92	-42.79
10	39982.22	42.79 AV	54	-11.21	-60.33	-60.46	4.92	-52.47

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

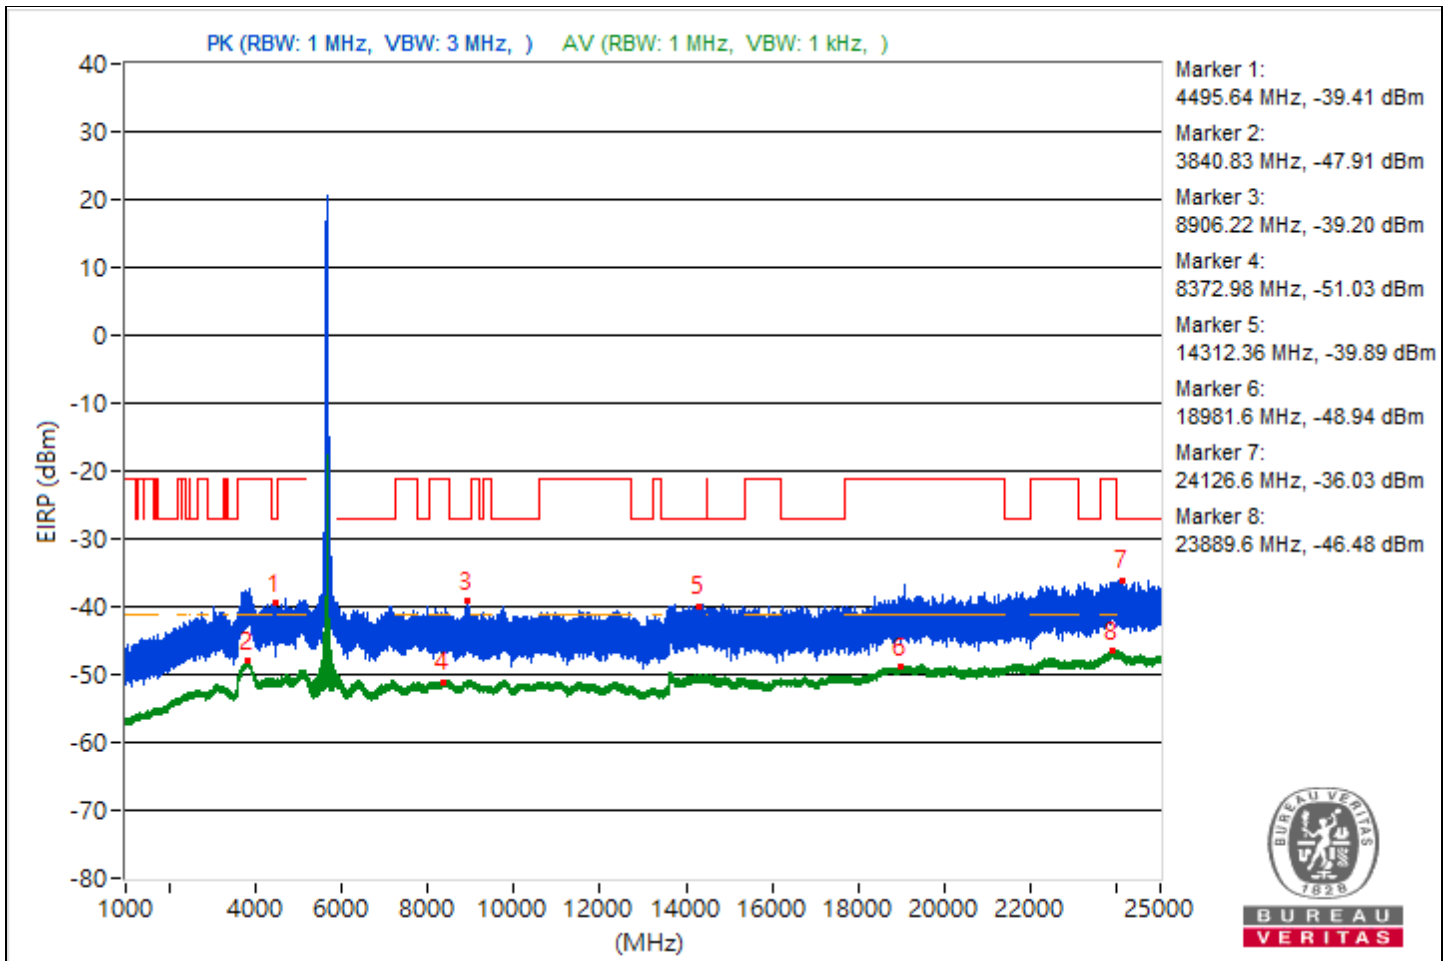

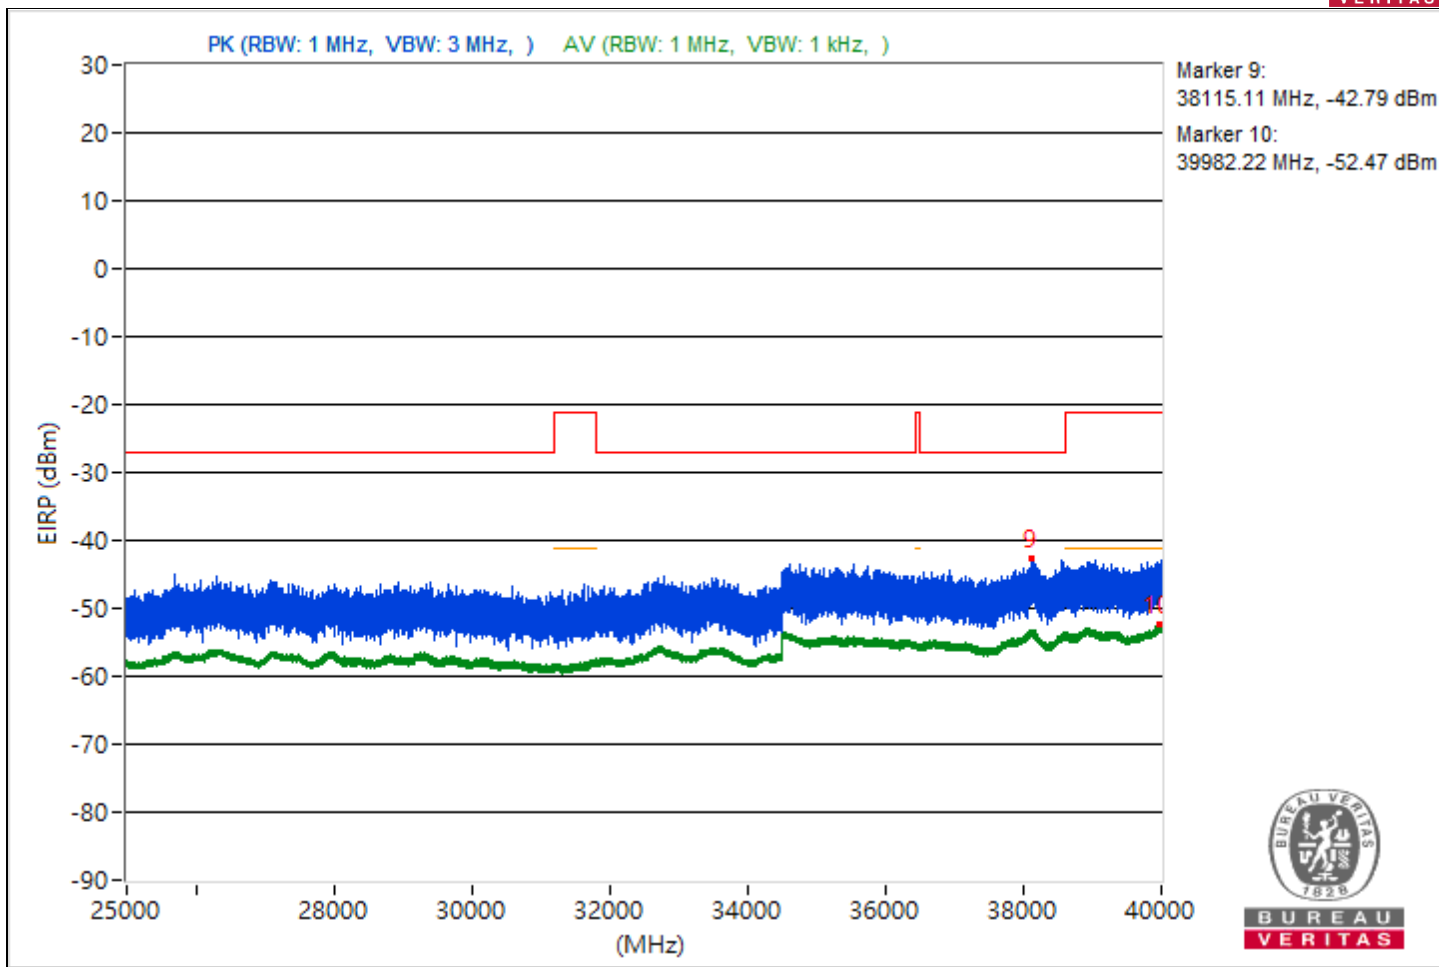



RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4458.23	54.78 PK	68.26	-13.48	-47.14	-50.21	4.92	-40.48
2	3814.08	47.51 AV	54	-6.49	-55.99	-55.4	4.92	-47.75
3	#9821.96	55.53 PK	68.26	-12.73	-49.77	-46.25	4.92	-39.73
4	8224	44.17 AV	54	-9.83	-58.55	-59.56	4.92	-51.09
5	#14953.42	55.57 PK	68.26	-12.69	-50.84	-45.79	4.92	-39.69
6	18800.2	46.18 AV	54	-7.82	-56.63	-57.42	4.92	-49.08
7	#24626.3	58.91 PK	68.26	-9.35	-48.24	-42.25	4.92	-36.35
8	23874.3	48.78 AV	54	-5.22	-54.16	-54.68	4.92	-46.48
9	#34528.71	51.89 PK	68.26	-16.37	-49.38	-54.79	4.92	-43.37
10	39996.62	42.63 AV	54	-11.37	-60.85	-60.3	4.92	-52.63

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

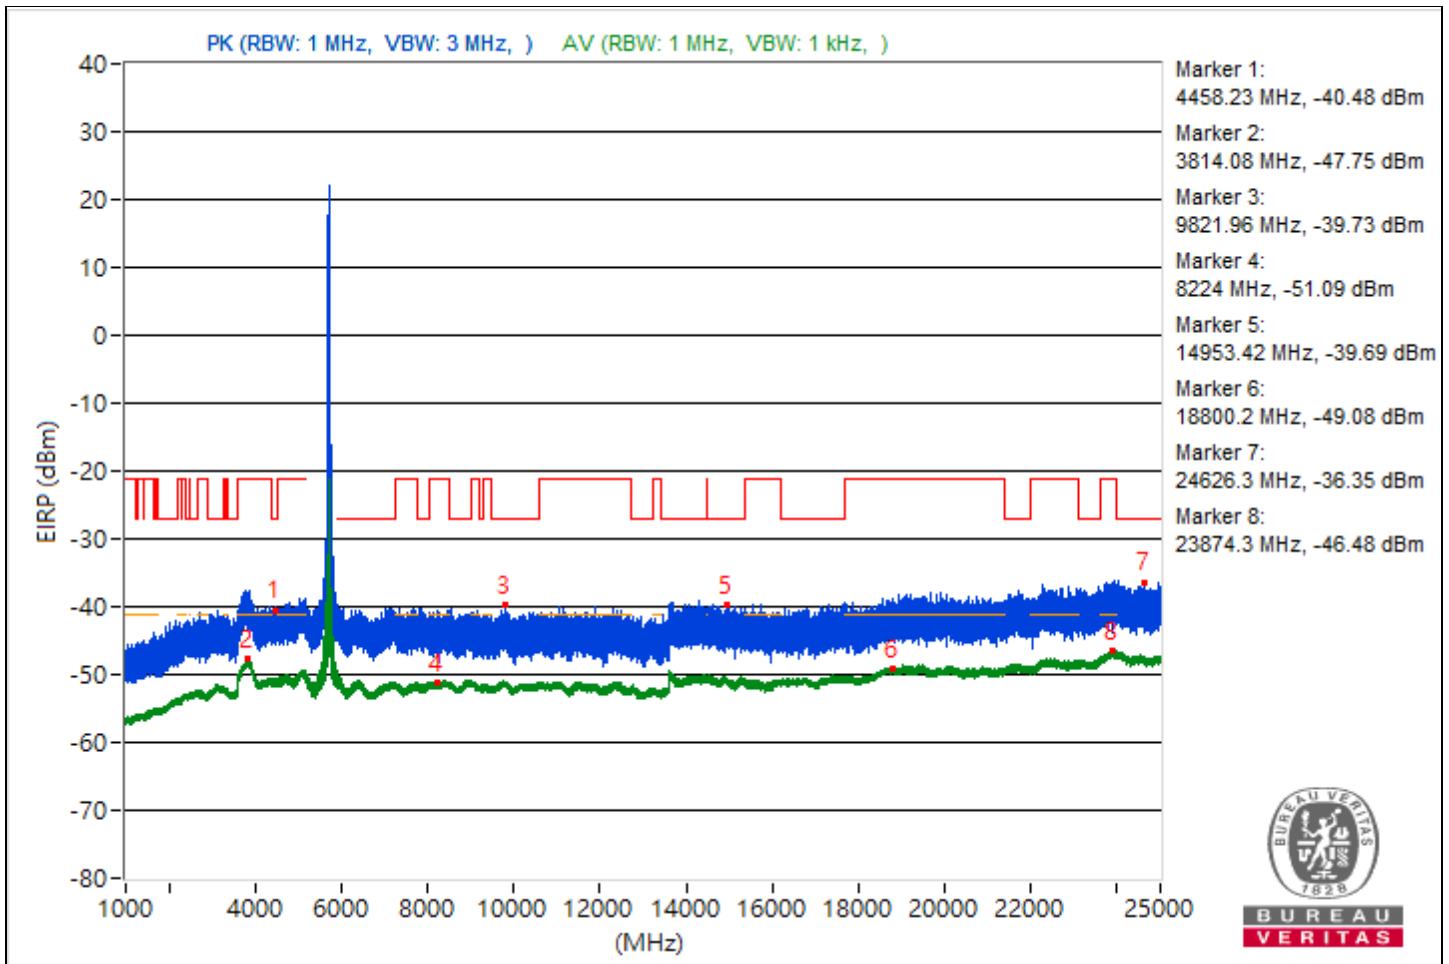

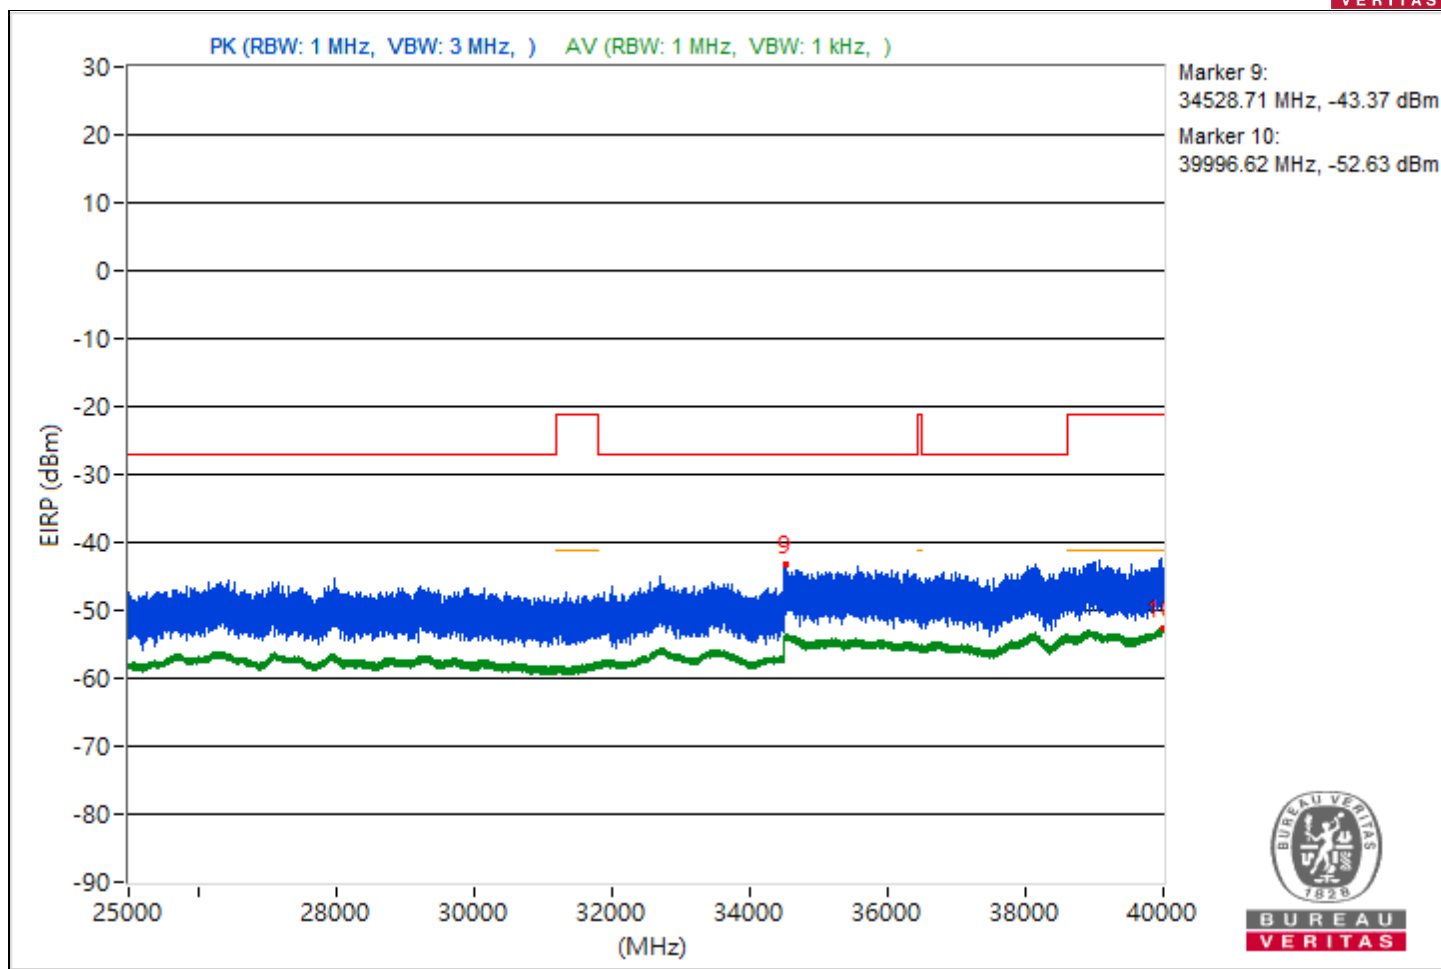



RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3137.33	54.96 PK	68.26	-13.3	-46.84	-50.3	4.92	-40.3
2	3816.33	47.23 AV	54	-6.77	-55.5	-56.47	4.92	-48.03
3	#10301.96	54.44 PK	68.26	-13.82	-54.38	-46.38	4.92	-40.82
4	8419.64	44.3 AV	54	-9.7	-59.22	-58.59	4.92	-50.96
5	#17665.2	55.7 PK	68.26	-12.56	-45.55	-51.09	4.92	-39.56
6	18966.2	46.12 AV	54	-7.88	-57.49	-56.69	4.92	-49.14
7	#24354.7	58.23 PK	68.26	-10.03	-42.56	-50.82	4.92	-37.03
8	23920.1	48.83 AV	54	-5.17	-54.5	-54.23	4.92	-46.43
9	#34764	51.99 PK	68.26	-16.27	-48.66	-58	4.92	-43.27
10	39989.87	42.71 AV	54	-11.29	-60.26	-60.73	4.92	-52.55

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

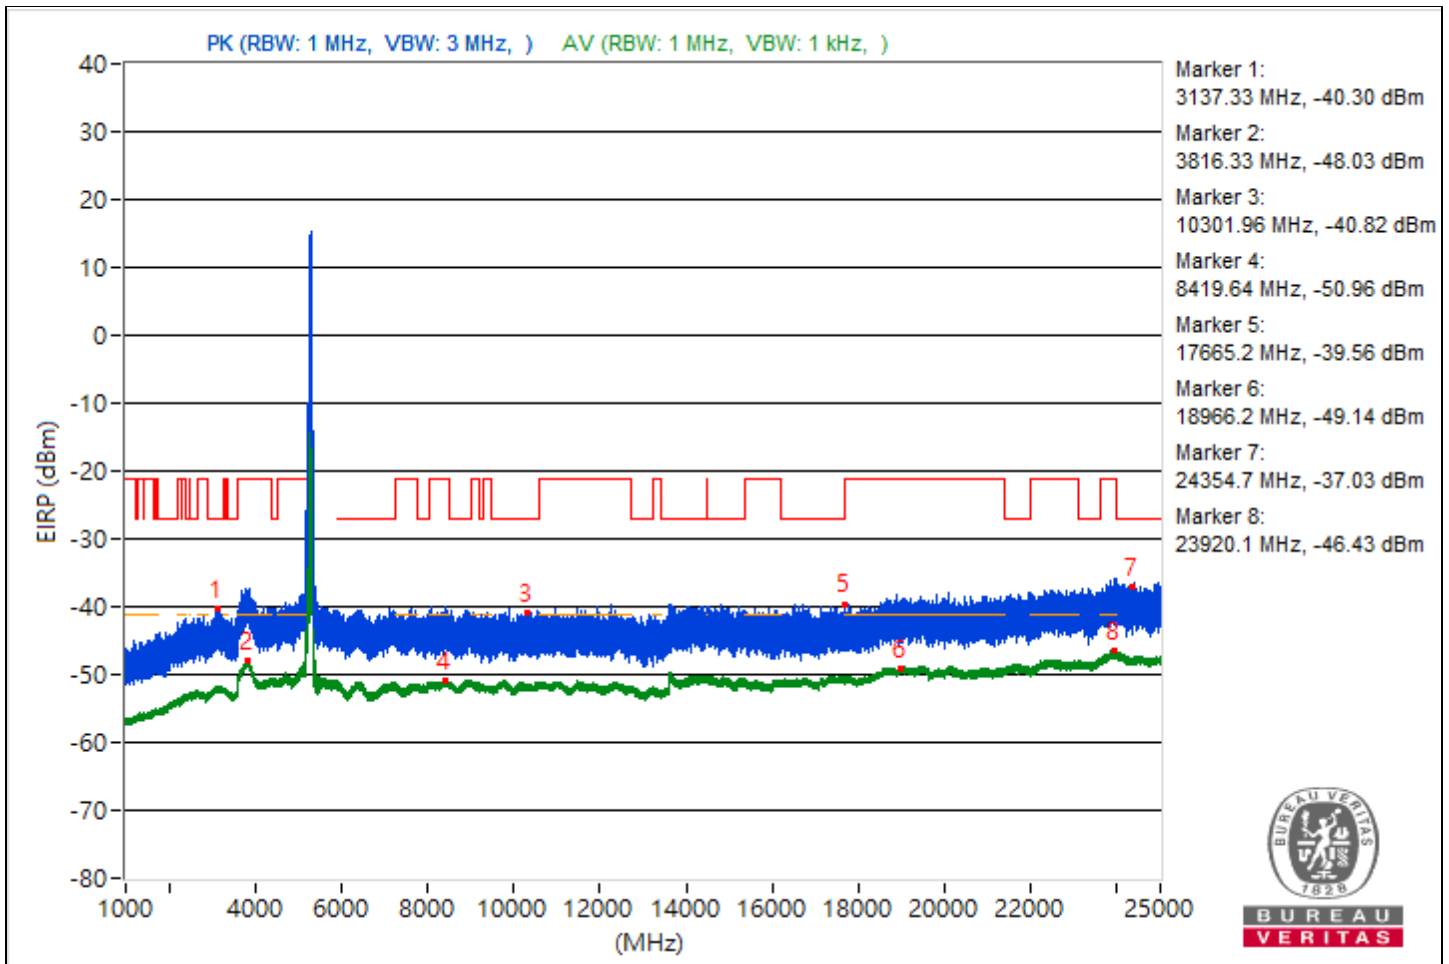

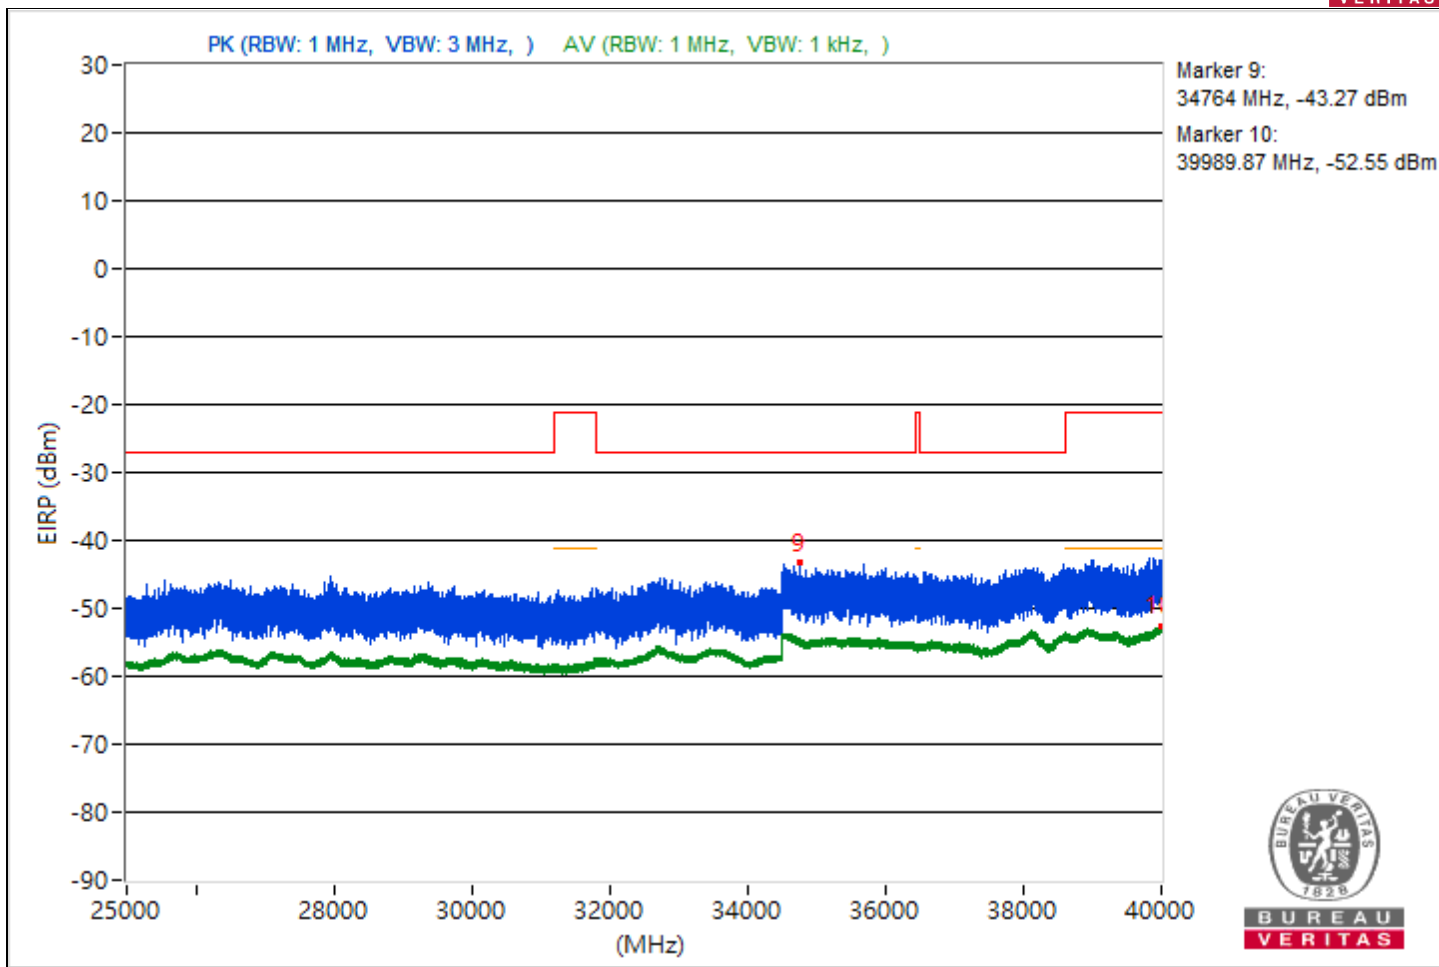



RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4456.13	54.93 PK	68.26	-13.33	-46.12	-52.68	4.92	-40.33
2	3816.8	47.14 AV	54	-6.86	-55.58	-56.58	4.92	-48.12
3	#8979.2	54.95 PK	68.26	-13.31	-52.53	-46.13	4.92	-40.31
4	11510.31	44.3 AV	54	-9.7	-59.3	-58.51	4.92	-50.96
5	#14680.71	55.9 PK	68.26	-12.36	-45.74	-49.7	4.92	-39.36
6	18995.8	46.08 AV	54	-7.92	-56.72	-57.54	4.92	-49.18
7	#24045.1	58.17 PK	68.26	-10.09	-48.71	-43.06	4.92	-37.09
8	23863.2	48.65 AV	54	-5.35	-54.06	-55.08	4.92	-46.61
9	#34574.58	52.06 PK	68.26	-16.2	-55.87	-48.92	4.92	-43.2
10	39992.27	42.62 AV	54	-11.38	-60.21	-60.95	4.92	-52.64

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

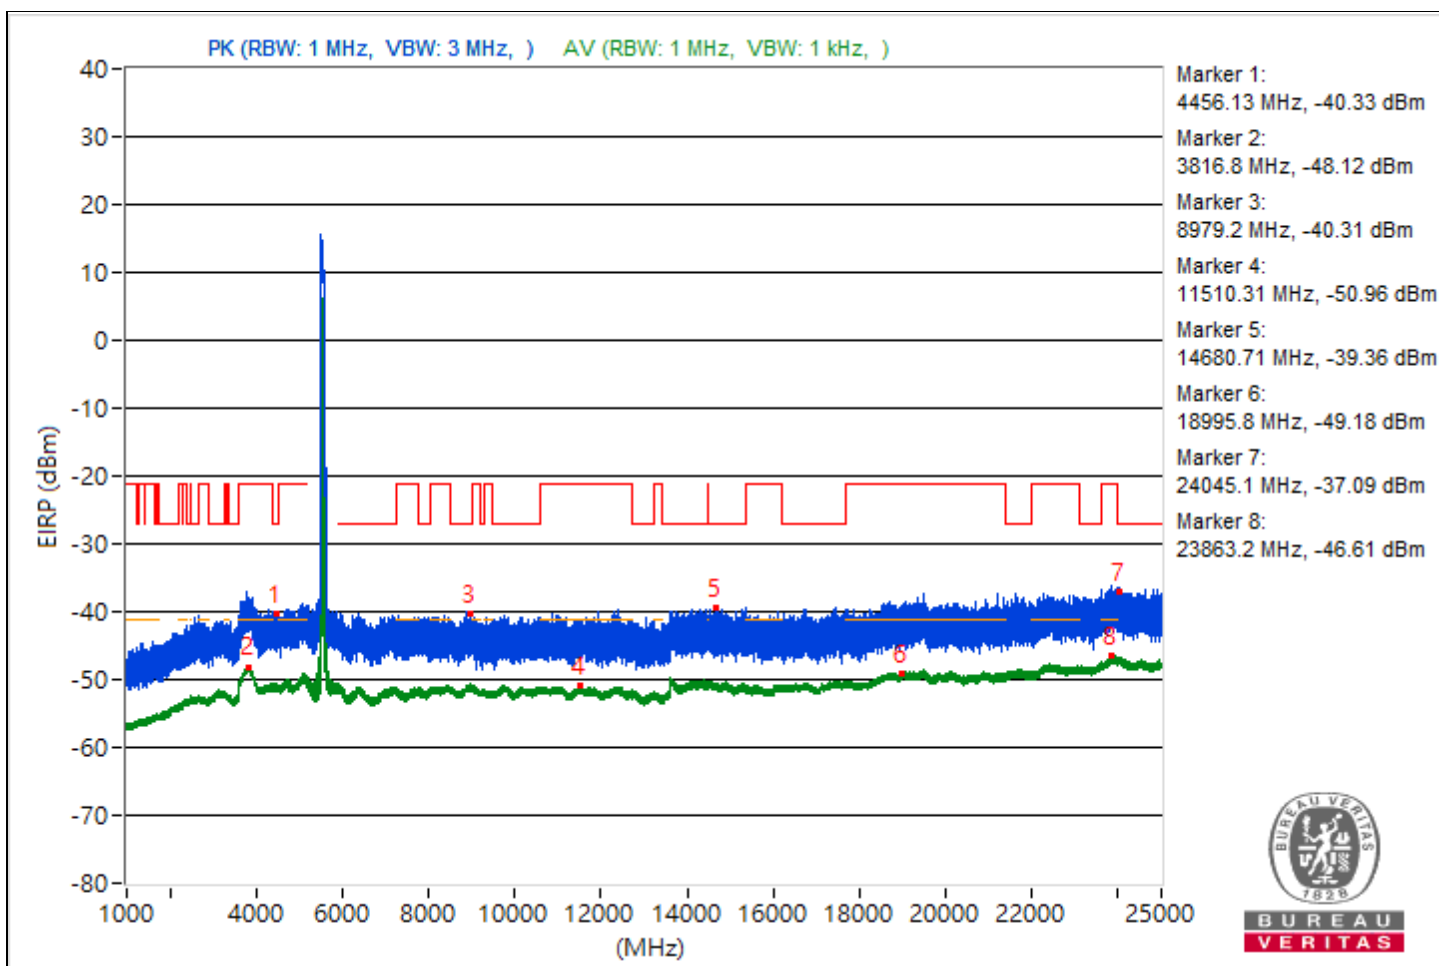

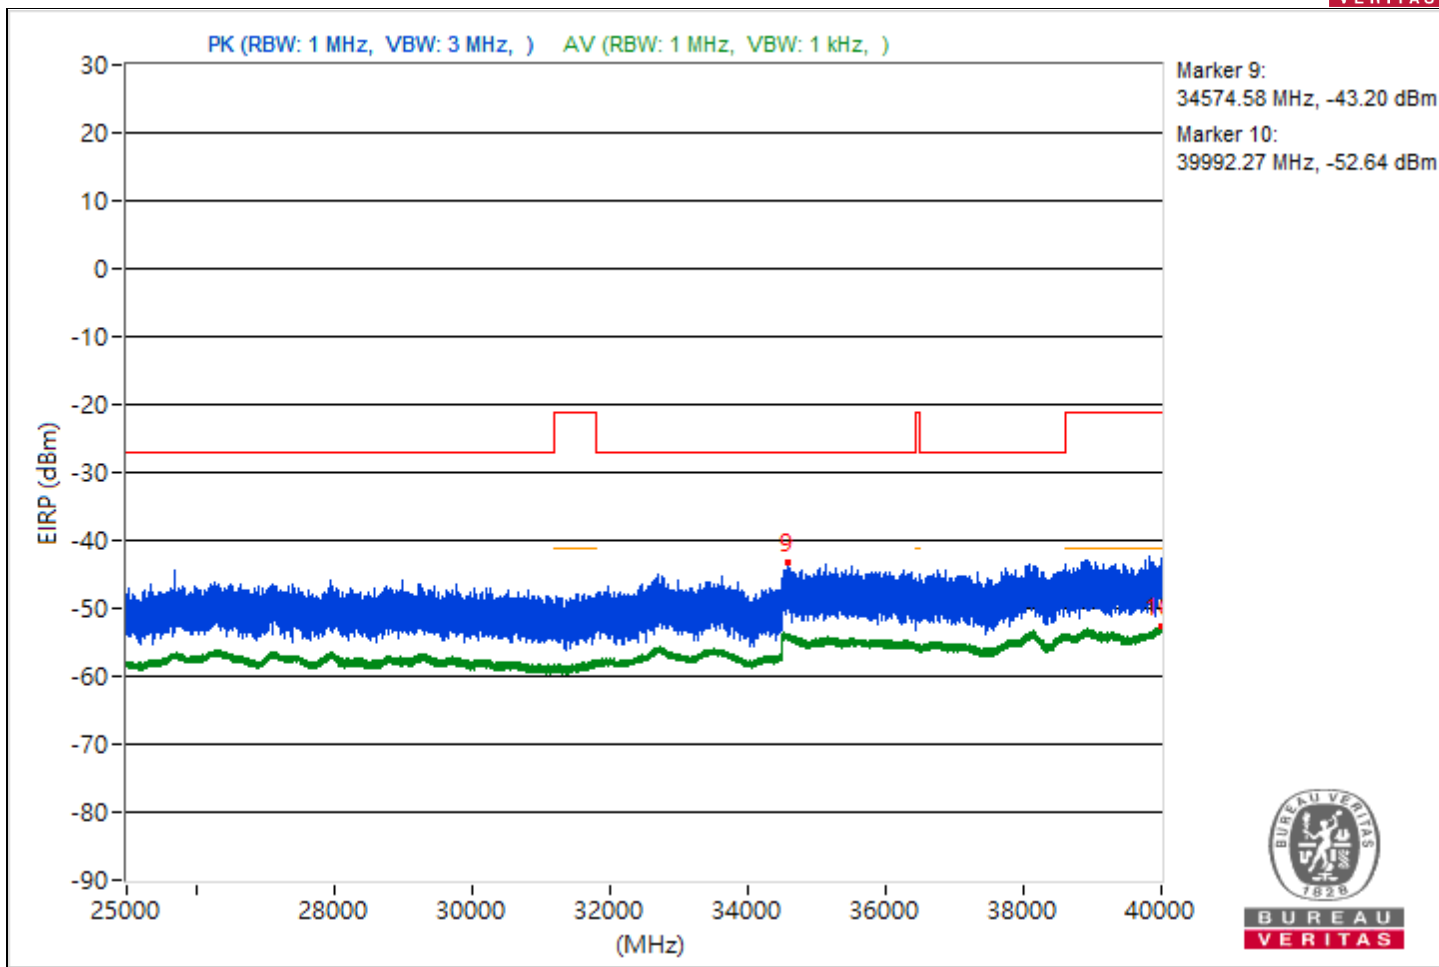



RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4436.14	56.12 PK	68.26	-12.14	-50.72	-45.12	4.92	-39.14
2	3829.4	47.38 AV	54	-6.62	-55.94	-55.68	4.92	-47.88
3	#9632.8	54.31 PK	68.26	-13.95	-46.89	-52.66	4.92	-40.95
4	8471.82	44.34 AV	54	-9.66	-58.59	-59.13	4.92	-50.92
5	#13608.36	56.85 PK	68.26	-11.41	-46.83	-45.9	4.92	-38.41
6	18978.5	46.24 AV	54	-7.76	-56.62	-57.3	4.92	-49.02
7	#24039.1	59.17 PK	68.26	-9.09	-46.3	-42.53	4.92	-36.09
8	23923.6	48.57 AV	54	-5.43	-54.99	-54.28	4.92	-46.69
9	#38088.27	51.45 PK	68.26	-16.81	-49.46	-56.84	4.92	-43.81
10	39998.84	42.82 AV	54	-11.18	-60.21	-60.53	4.92	-52.44

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

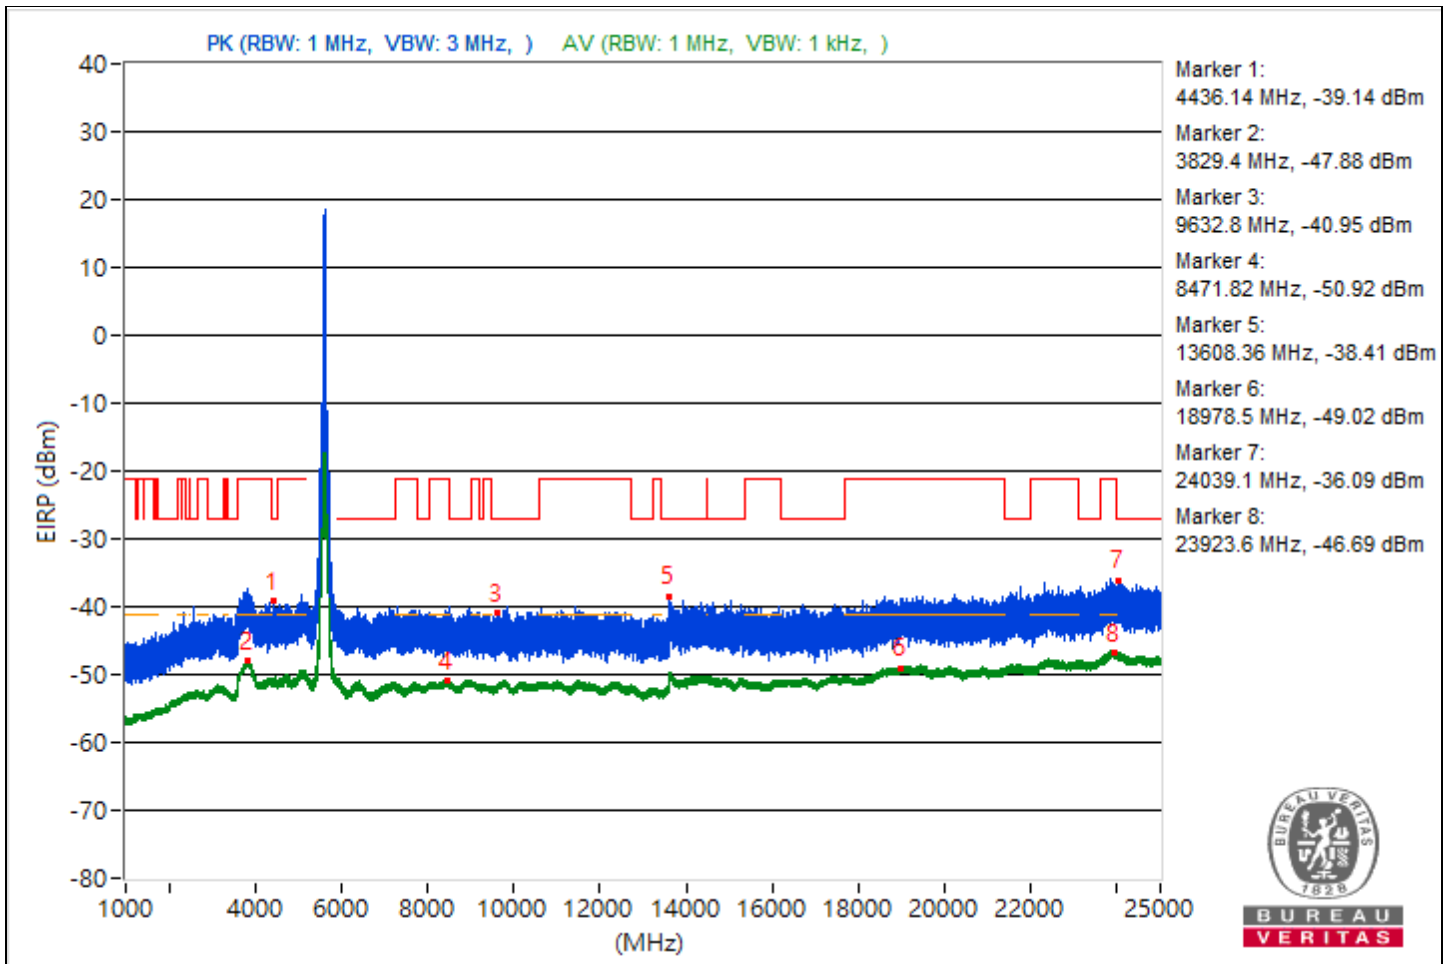

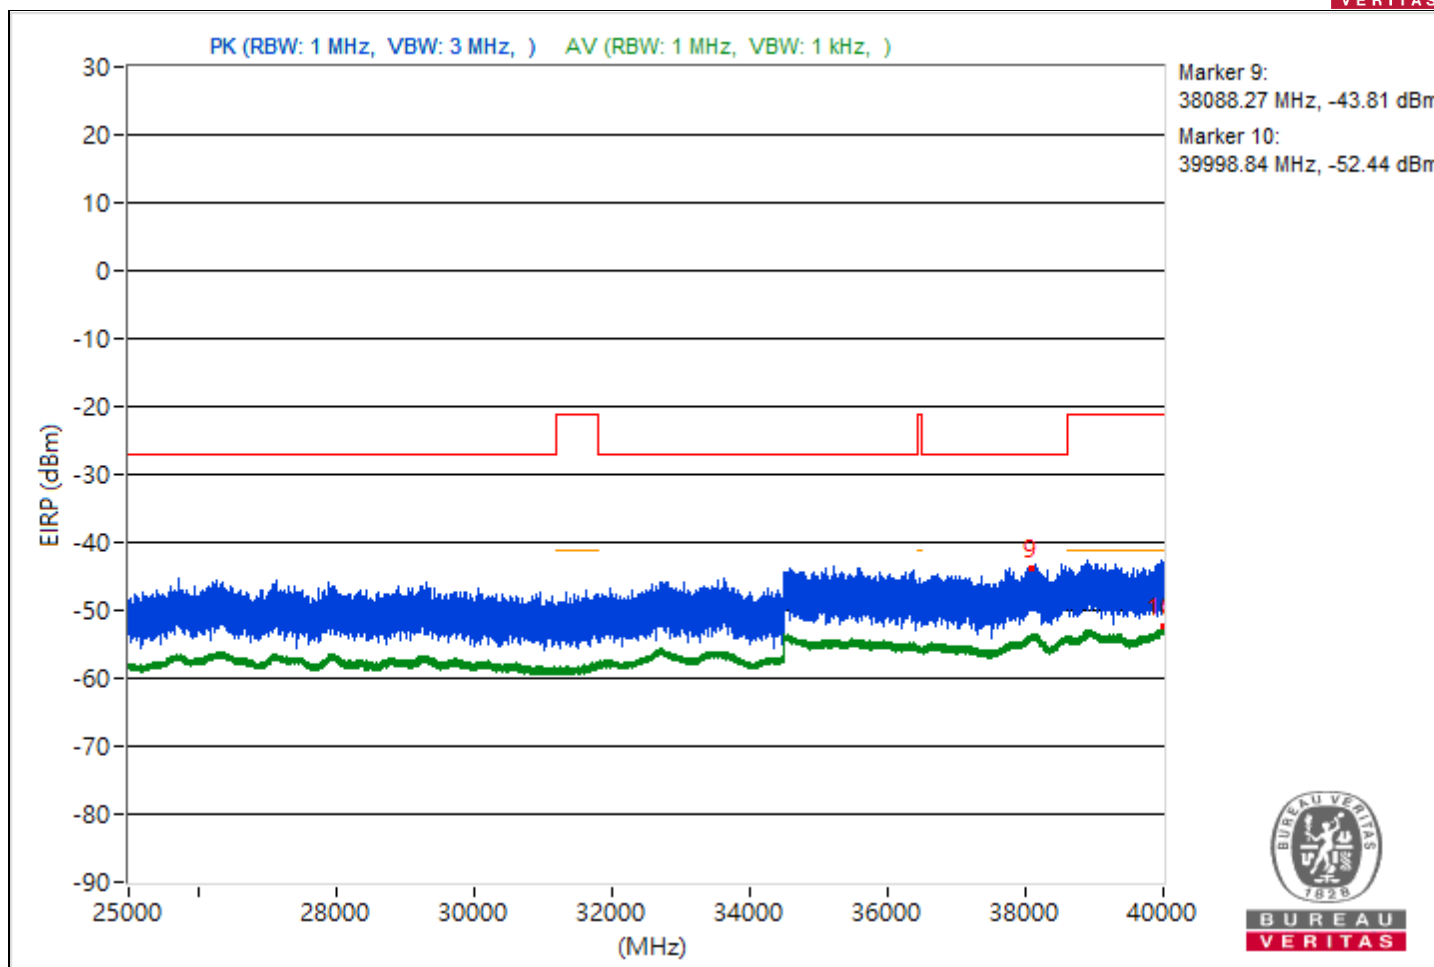



RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4497.51	54.67 PK	68.26	-13.59	-49.6	-47.66	4.92	-40.59
2	3821.7	47.29 AV	54	-6.71	-55.61	-56.2	4.92	-47.97
3	#5907.62	55.46 PK	68.26	-12.8	-50.37	-46.1	4.92	-39.8
4	8398.4	44.38 AV	54	-9.62	-59.17	-58.48	4.92	-50.88
5	#14863.47	56.26 PK	68.26	-12	-53.43	-44.43	4.92	-39
6	18999.9	46.35 AV	54	-7.65	-56.59	-57.12	4.92	-48.91
7	#24915.5	58.33 PK	68.26	-9.93	-42.95	-48.35	4.92	-36.93
8	23903.7	48.68 AV	54	-5.32	-54.79	-54.24	4.92	-46.58
9	#38089.33	51.76 PK	68.26	-16.5	-49.31	-55.76	4.92	-43.5
10	39990.67	42.54 AV	54	-11.46	-60.17	-61.2	4.92	-52.72

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

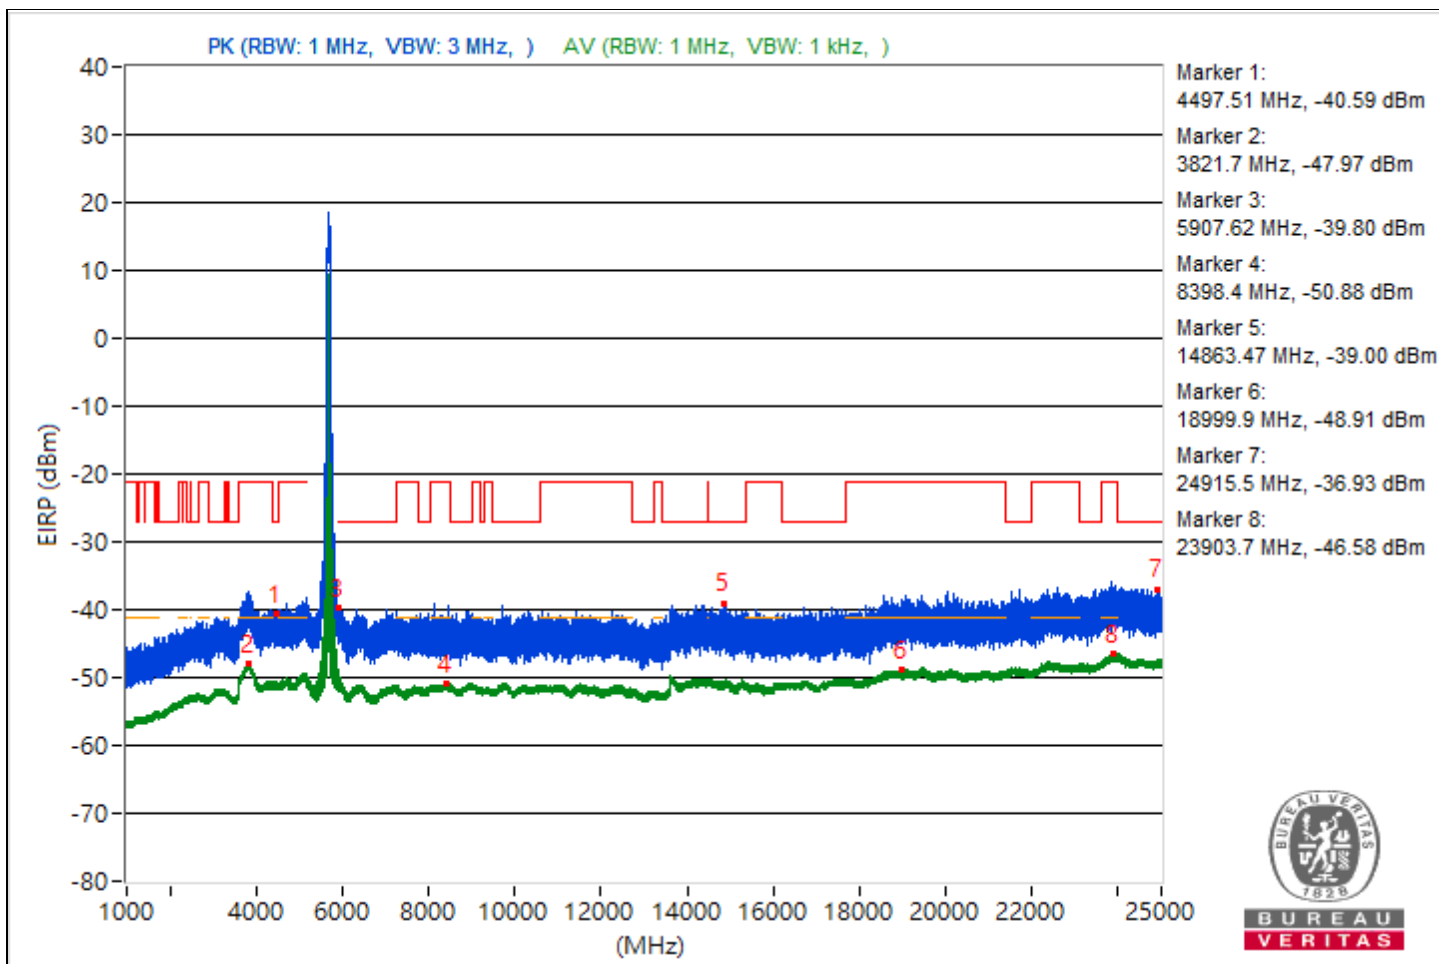

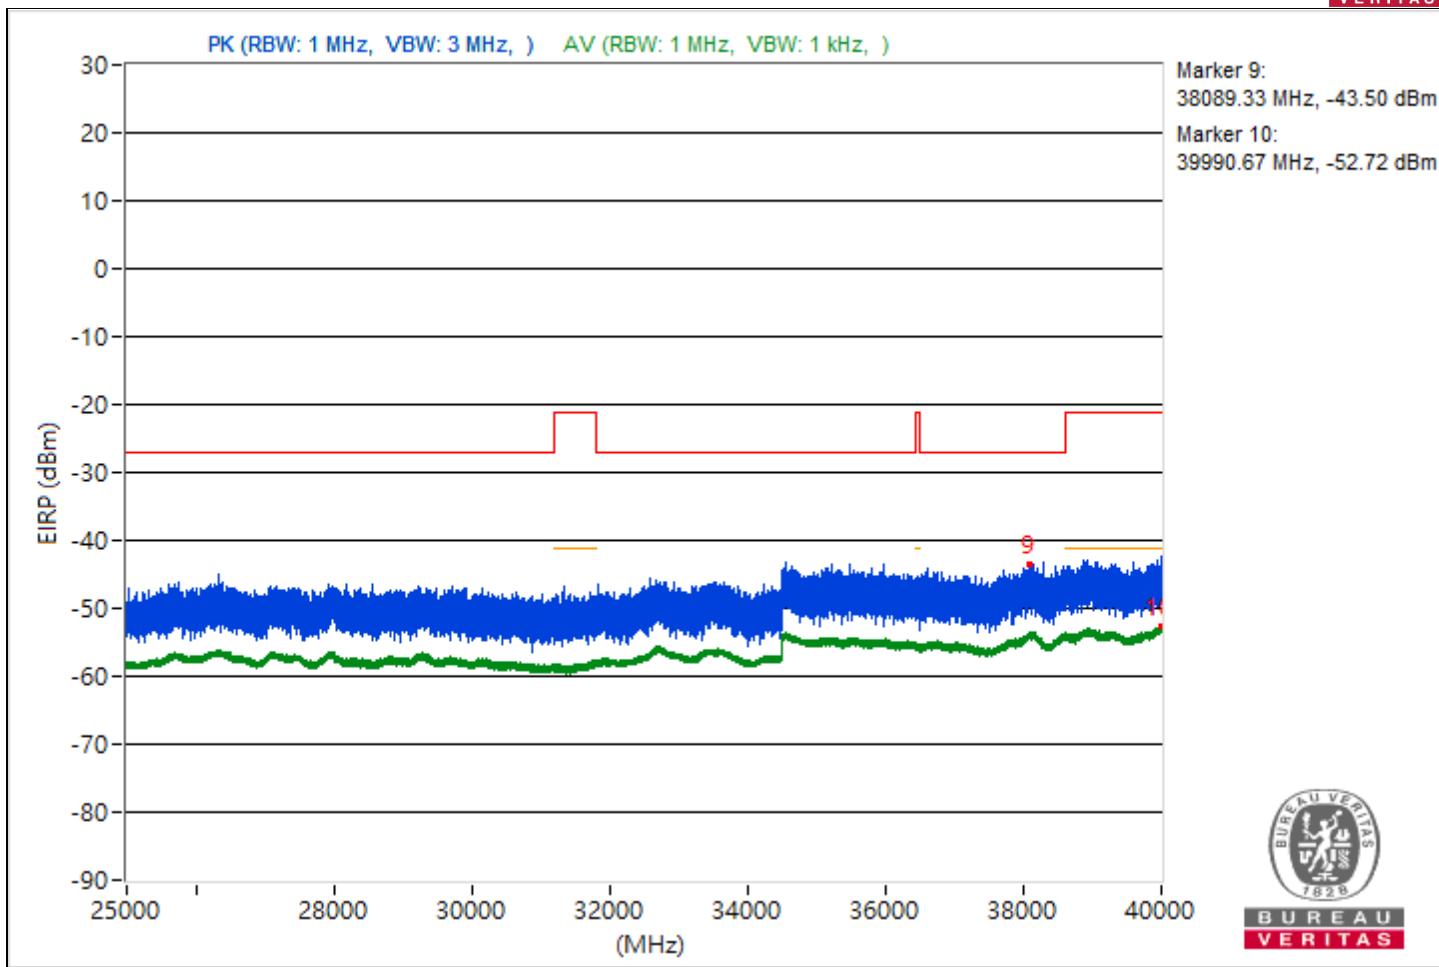



RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4444.93	54.41 PK	68.26	-13.85	-46.68	-53	4.92	-40.85
2	5099.67	48.86 AV	54	-5.14	-54.96	-53.77	4.92	-46.4
3	#9763.82	55.1 PK	68.26	-13.16	-50.99	-46.37	4.92	-40.16
4	8400.27	44.48 AV	54	-9.52	-58.18	-59.31	4.92	-50.78
5	#14039.64	56.21 PK	68.26	-12.05	-44.82	-51.49	4.92	-39.05
6	18984	46.23 AV	54	-7.77	-56.56	-57.4	4.92	-49.03
7	#24138.4	58.63 PK	68.26	-9.63	-43.52	-45.93	4.92	-36.63
8	23946.4	48.58 AV	54	-5.42	-54.86	-54.38	4.92	-46.68
9	#34639.11	52.33 PK	68.26	-15.93	-48.79	-54.93	4.92	-42.93
10	39969.33	42.51 AV	54	-11.49	-60.25	-61.17	4.92	-52.75

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

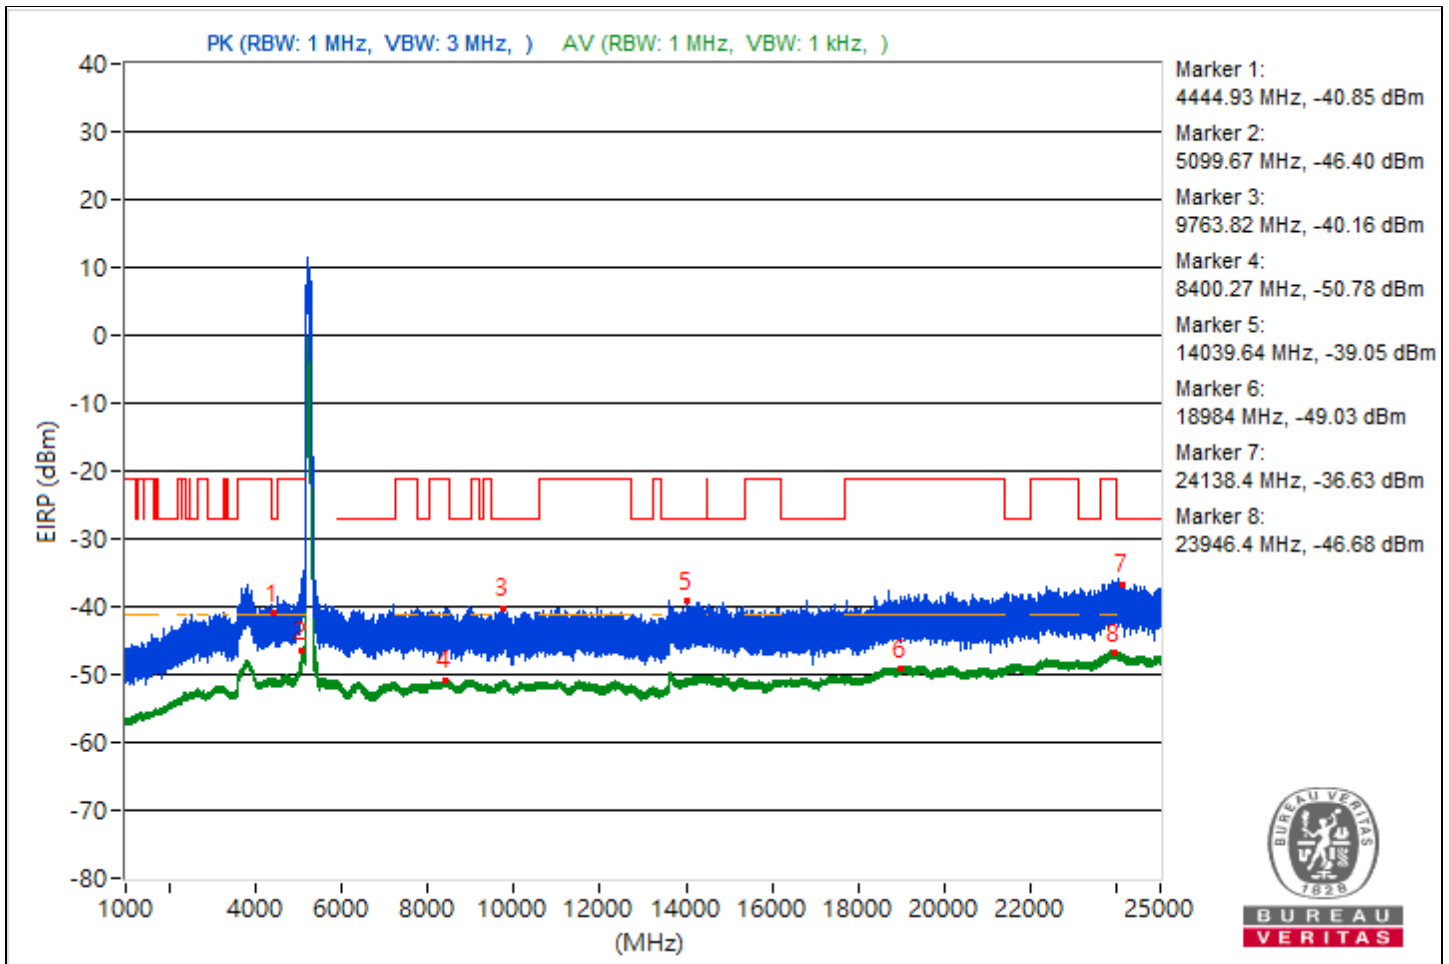

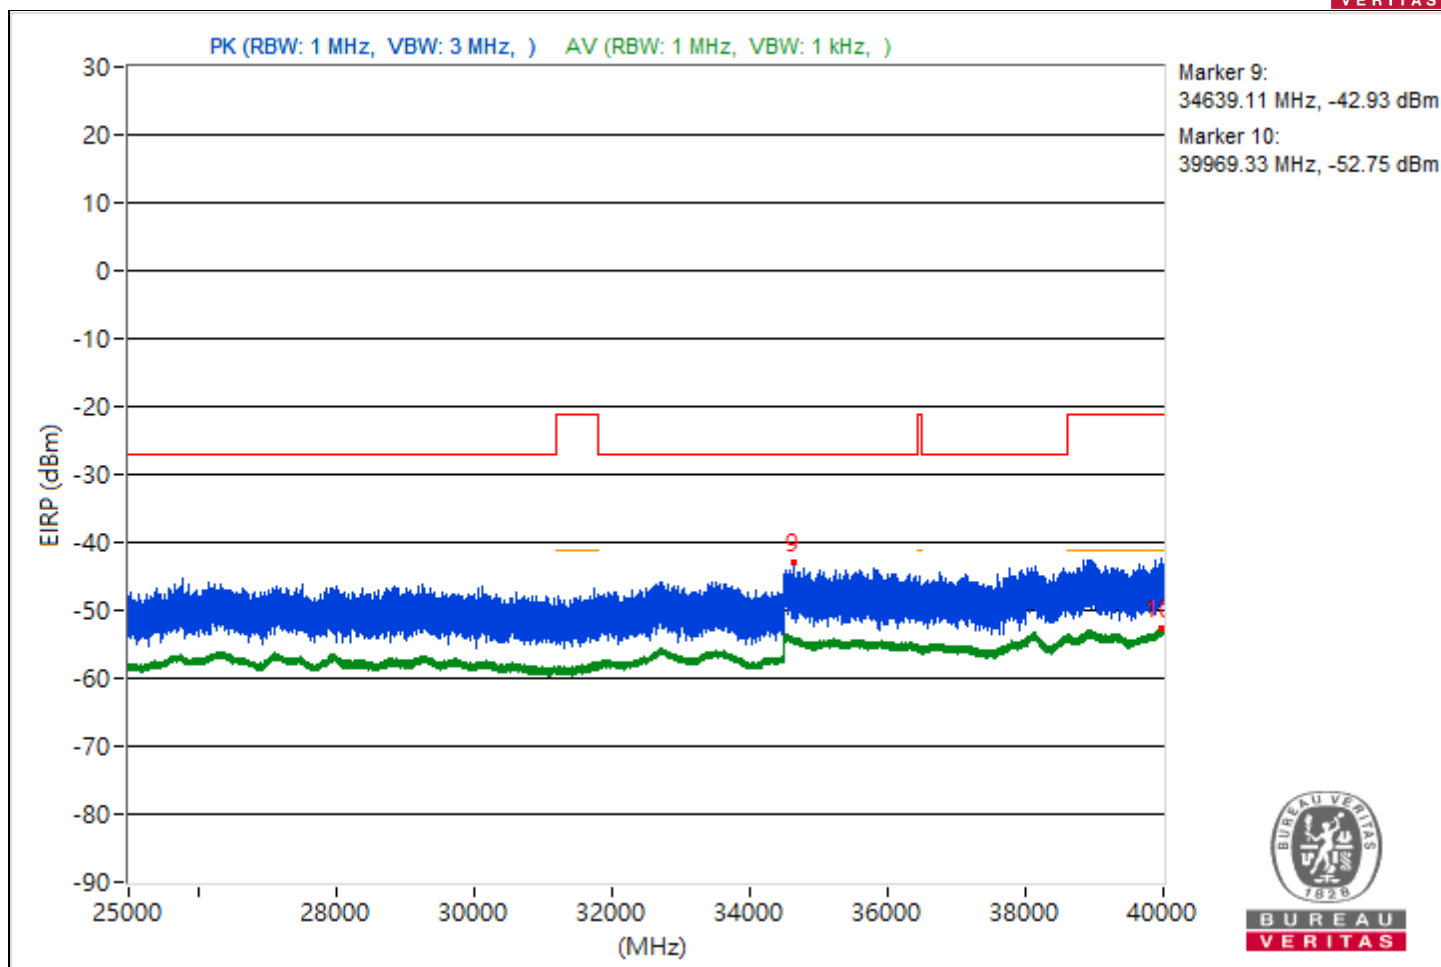



RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4456.13	55.42 PK	68.26	-12.84	-46.45	-49.68	4.92	-39.84
2	3818.67	47 AV	54	-7	-56.53	-55.87	4.92	-48.26
3	#6416.68	54.59 PK	68.26	-13.67	-51.52	-46.87	4.92	-40.67
4	8468.27	44.2 AV	54	-9.8	-59.4	-58.62	4.92	-51.06
5	#13638.31	56.62 PK	68.26	-11.64	-47.34	-45.92	4.92	-38.64
6	18982.7	46.24 AV	54	-7.76	-57.19	-56.72	4.92	-49.02
7	#24050.1	59.29 PK	68.26	-8.97	-42.83	-45.32	4.92	-35.97
8	23917	48.75 AV	54	-5.25	-54.93	-54	4.92	-46.51
9	#35561.87	51.55 PK	68.26	-16.71	-49.35	-56.77	4.92	-43.71
10	39989.87	42.66 AV	54	-11.34	-60.28	-60.8	4.92	-52.6

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

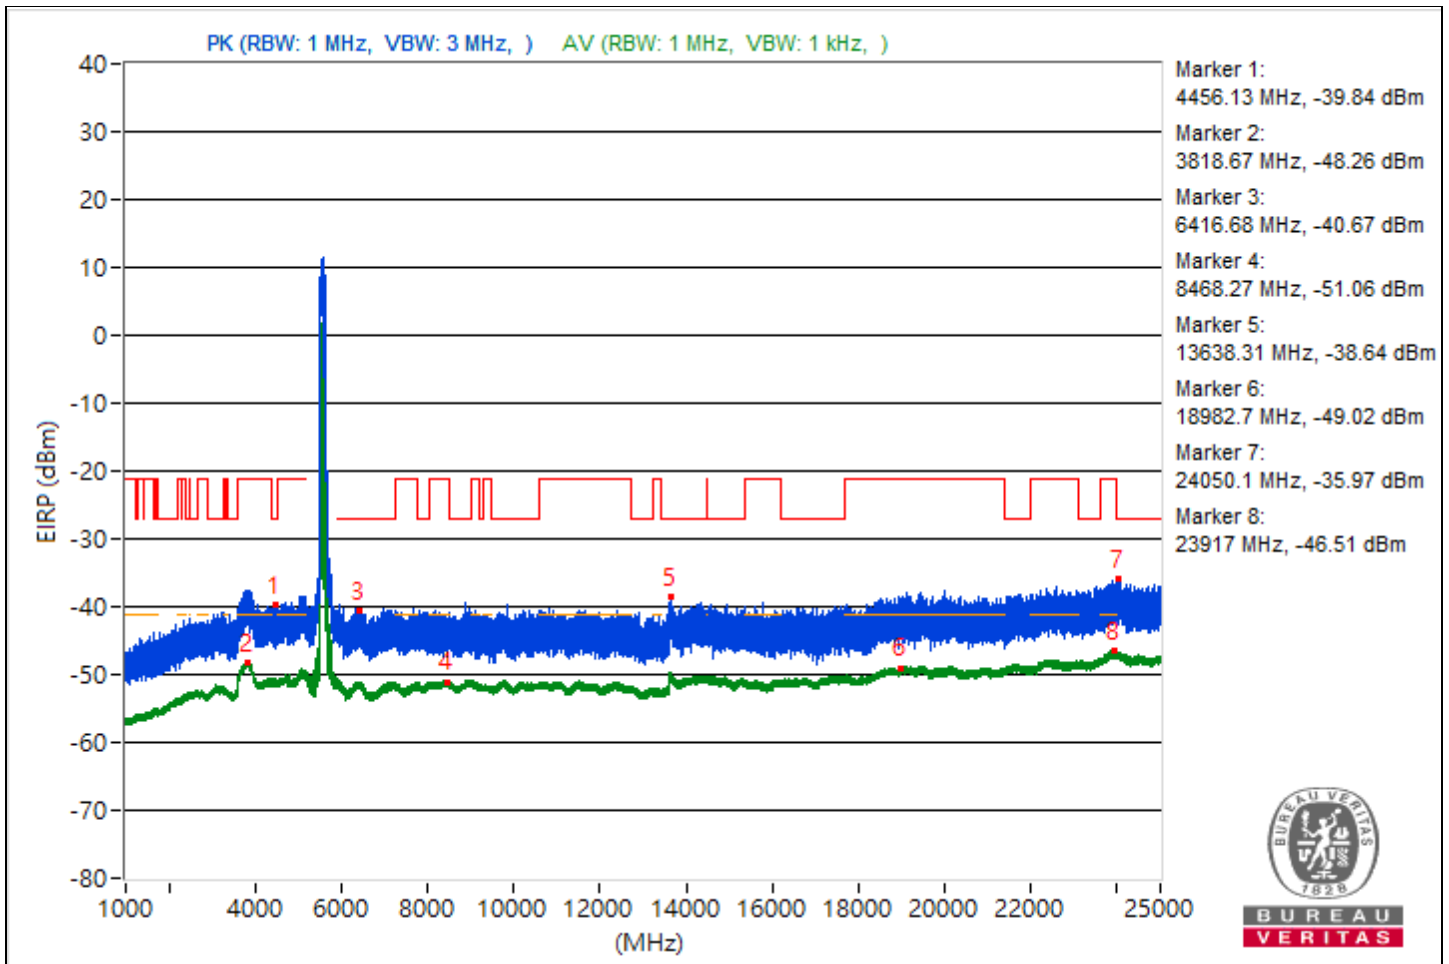

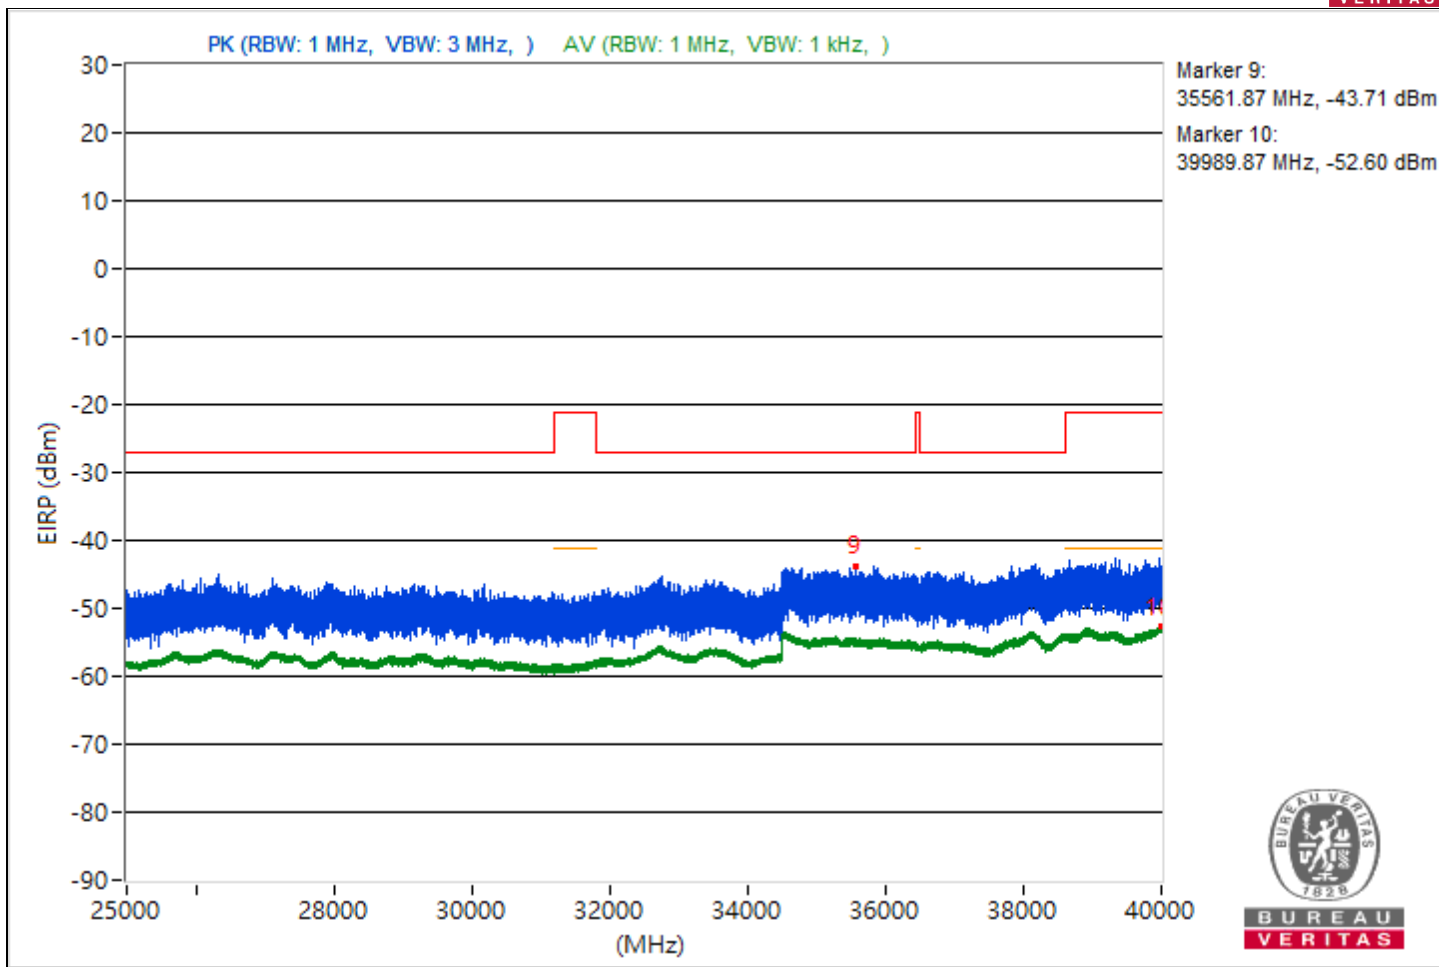



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4415.69	54.84 PK	68.26	-13.42	-50.32	-47	4.92	-40.42
2	3823.72	47.54 AV	54	-6.46	-56.06	-55.27	4.92	-47.72
3	#8638.67	54.69 PK	68.26	-13.57	-47	-50.83	4.92	-40.57
4	8408.89	44.8 AV	54	-9.2	-58.52	-58.27	4.92	-50.46
5	#14835.38	56.03 PK	68.26	-12.23	-49.51	-45.64	4.92	-39.23
6	18808.3	46.48 AV	54	-7.52	-56.36	-57.09	4.92	-48.78
7	#23142.5	58.4 PK	68.26	-9.86	-47.82	-43.02	4.92	-36.86
8	23927.4	48.68 AV	54	-5.32	-55.38	-53.78	4.92	-46.58
9	#35225.33	51.76 PK	68.26	-16.5	-49.02	-57.31	4.92	-43.5
10	39995.47	42.76 AV	54	-11.24	-60.97	-59.95	4.92	-52.5

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

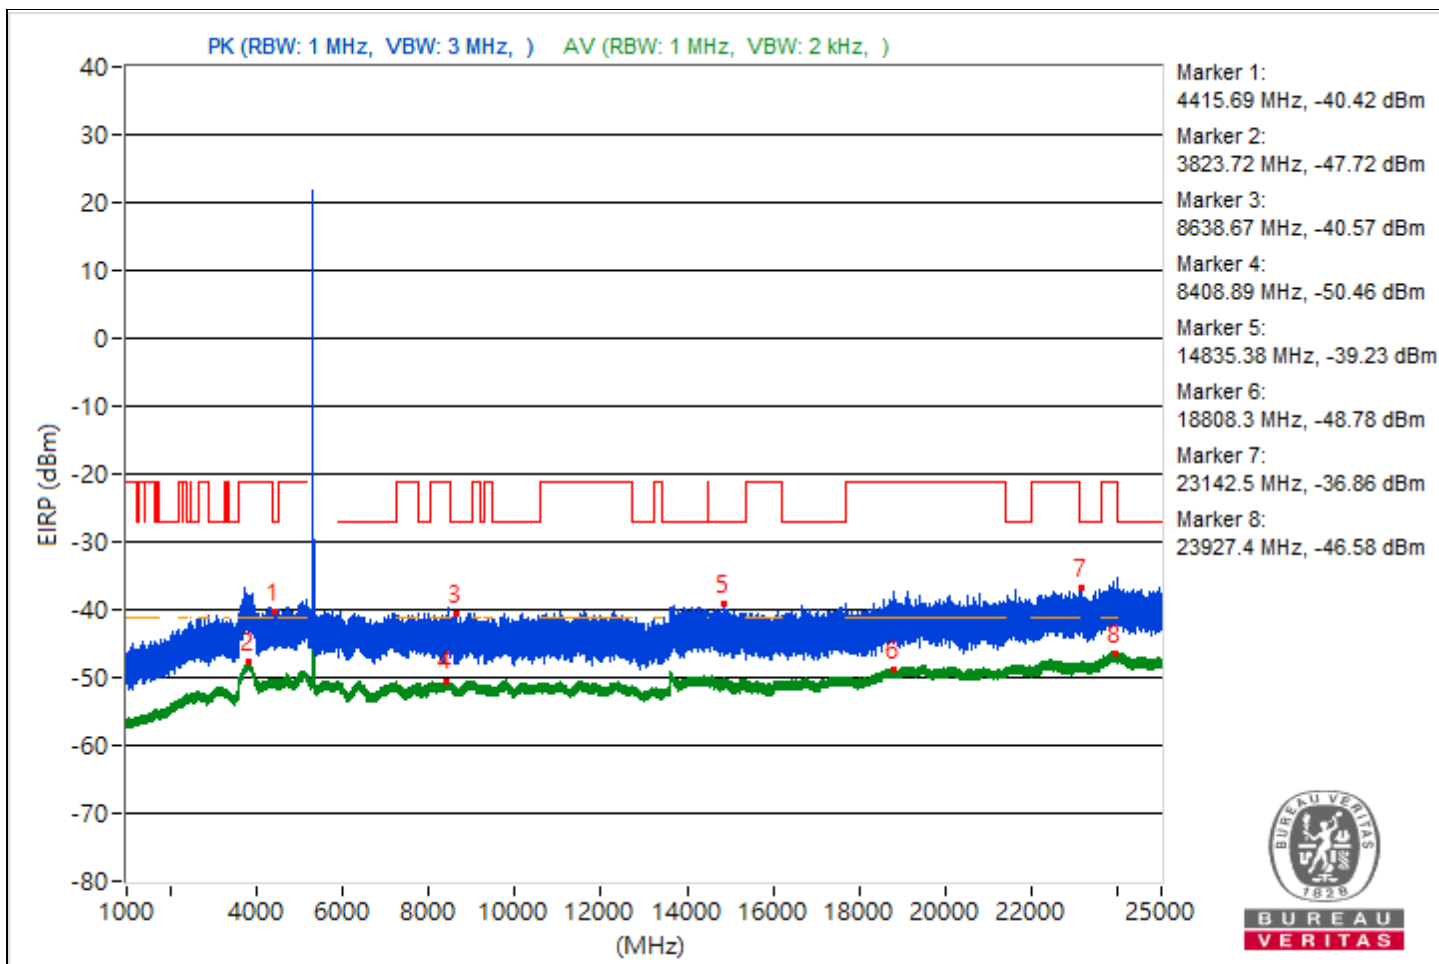

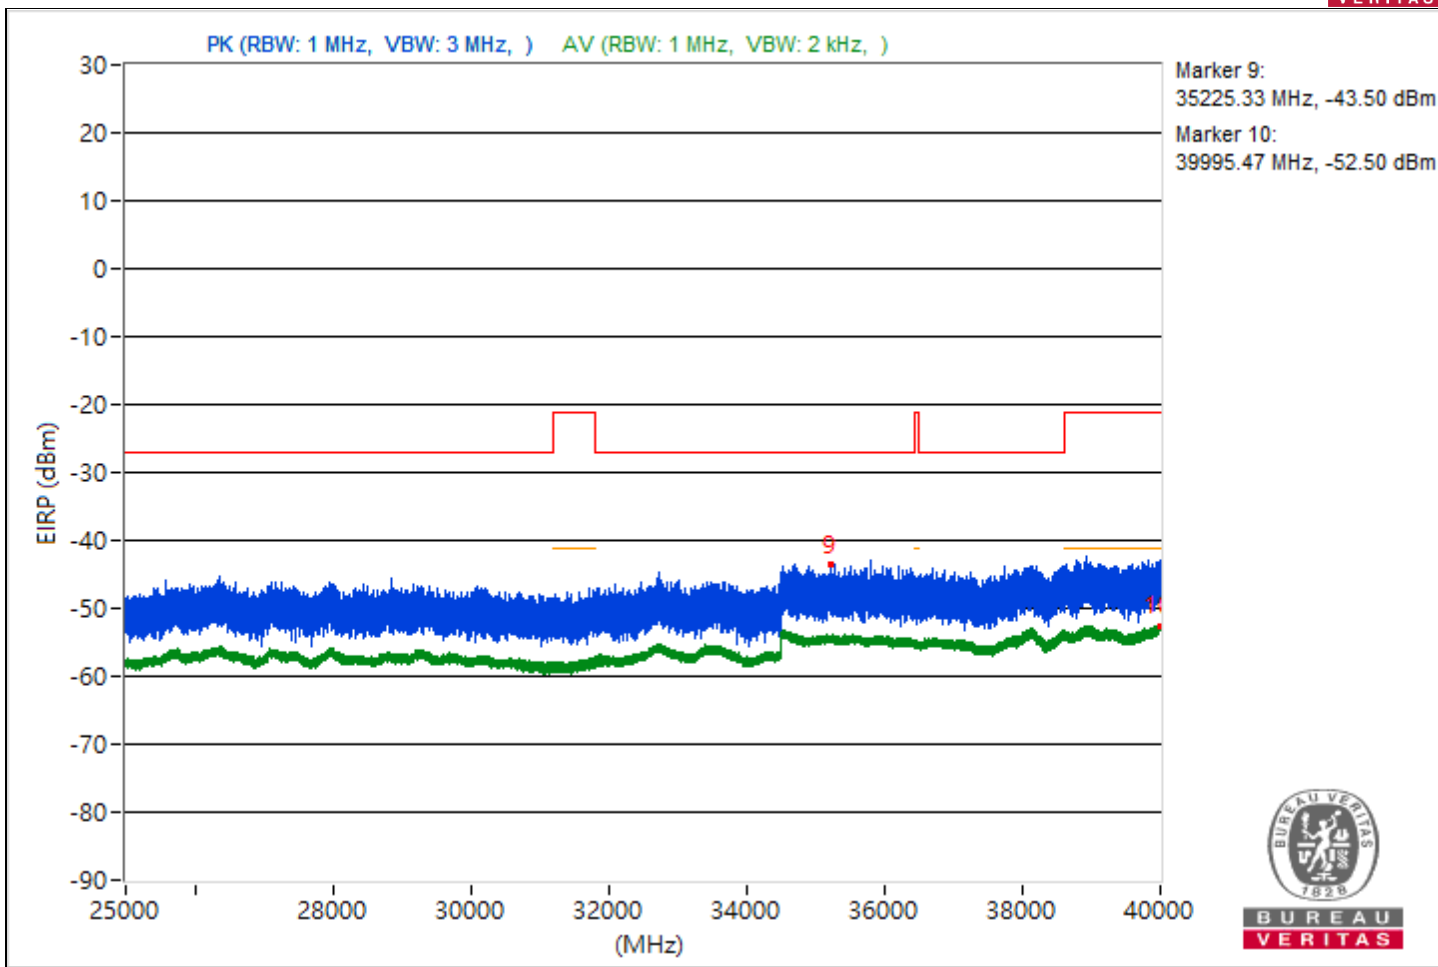



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3078.92	54.23 PK	68.26	-14.03	-52.17	-47.14	4.92	-41.03
2	3838.66	47.41 AV	54	-6.59	-55.28	-56.33	4.92	-47.85
3	#10545.24	54.78 PK	68.26	-13.48	-46.26	-52.88	4.92	-40.48
4	12358.4	44.6 AV	54	-9.4	-59.23	-58.04	4.92	-50.66
5	#14022.31	55.33 PK	68.26	-12.93	-46.02	-51.14	4.92	-39.93
6	18767.4	46.24 AV	54	-7.76	-57.66	-56.34	4.92	-49.02
7	#24038.6	59.92 PK	68.26	-8.34	-41.63	-45.94	4.92	-35.34
8	23886.6	48.79 AV	54	-5.21	-53.88	-54.98	4.92	-46.47
9	#35537.6	52.18 PK	68.26	-16.08	-49.74	-52.83	4.92	-43.08
10	39996.98	42.8 AV	54	-11.2	-60.16	-60.64	4.92	-52.46

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

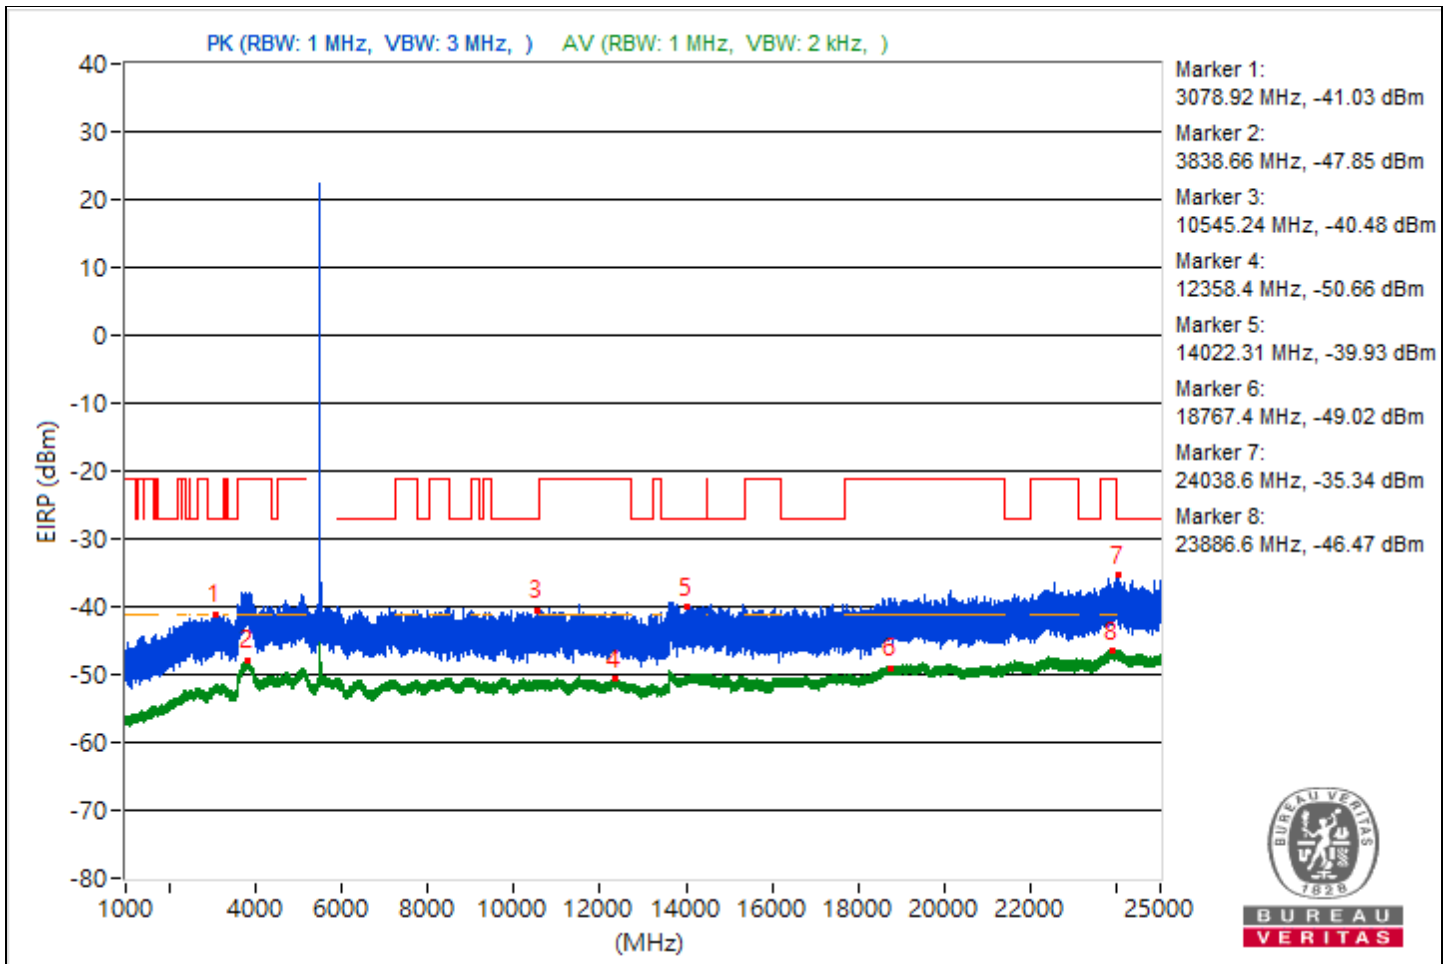

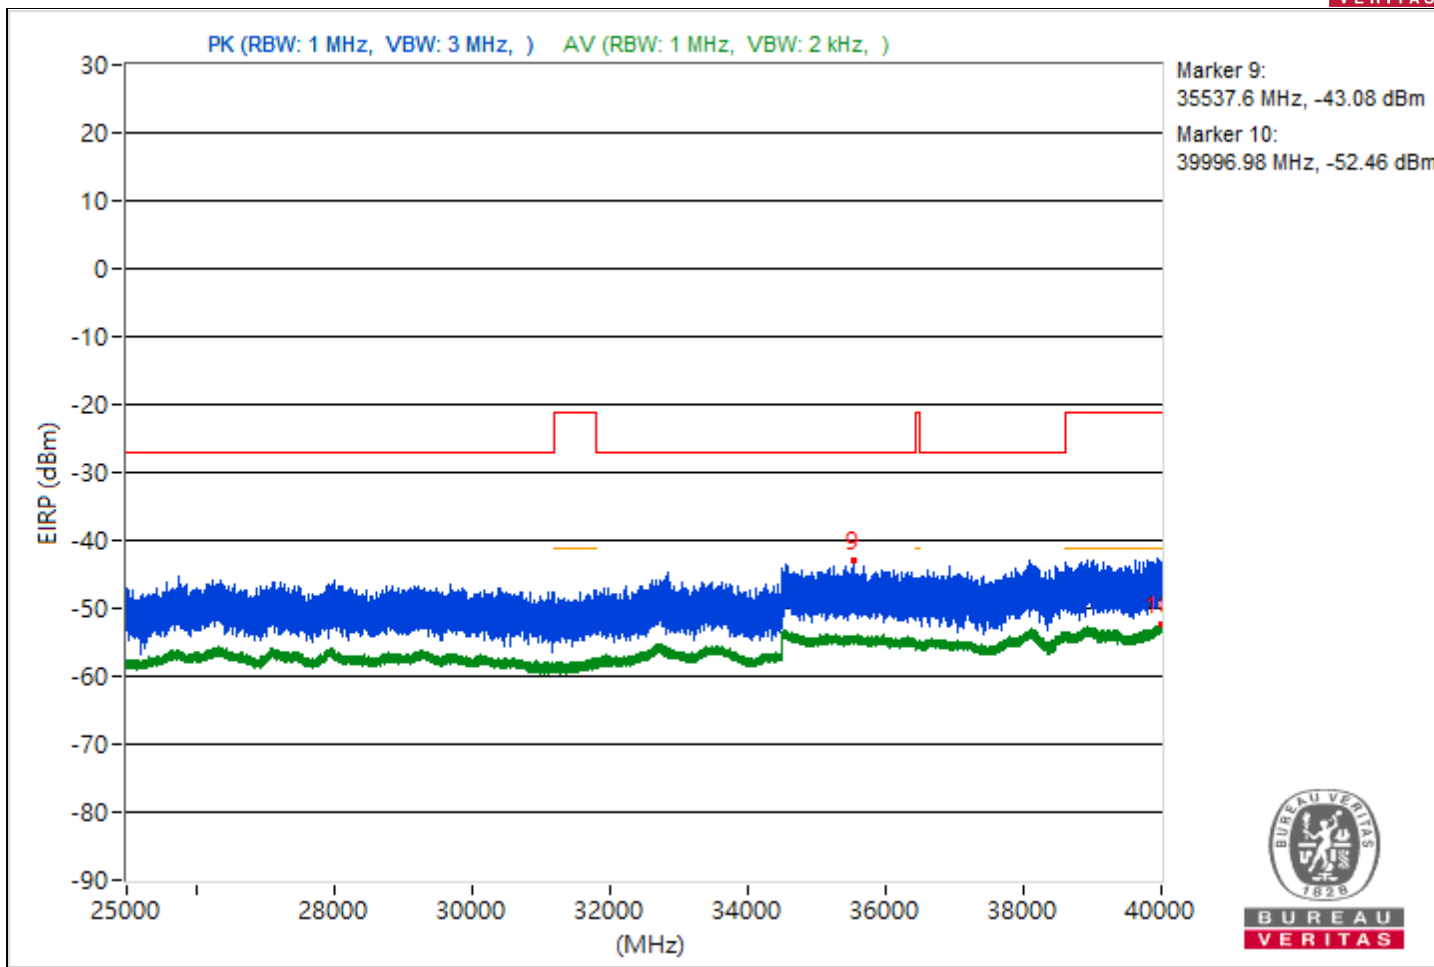



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4400.99	54.95 PK	68.26	-13.31	-49.54	-47.25	4.92	-40.31
2	3802.88	47.69 AV	54	-6.31	-55.26	-55.74	4.92	-47.57
3	#7190.41	55.32 PK	68.26	-12.94	-50.1	-46.41	4.92	-39.94
4	8483.11	44.8 AV	54	-9.2	-57.98	-58.84	4.92	-50.46
5	#14807.2	55.44 PK	68.26	-12.82	-45.89	-51.07	4.92	-39.82
6	18987	46.7 AV	54	-7.3	-55.89	-57.18	4.92	-48.56
7	#24447.7	58.67 PK	68.26	-9.59	-42.29	-49.33	4.92	-36.59
8	23955.9	48.84 AV	54	-5.16	-53.73	-55.07	4.92	-46.42
9	#34714.76	52.05 PK	68.26	-16.21	-48.92	-55.91	4.92	-43.21
10	39999.29	43.04 AV	54	-10.96	-60.52	-59.81	4.92	-52.22

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

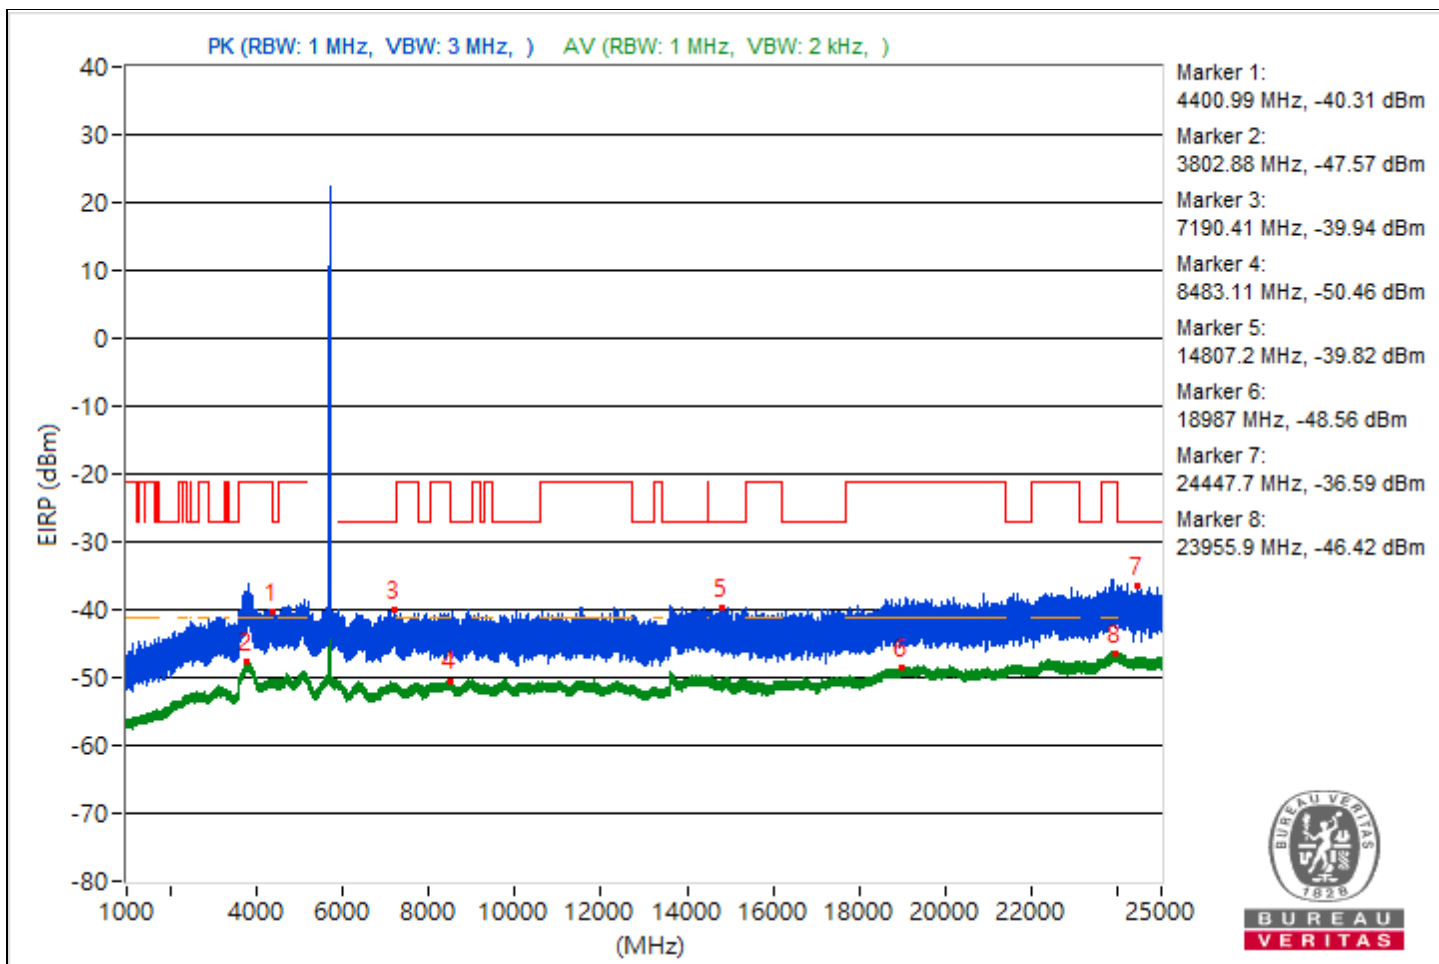

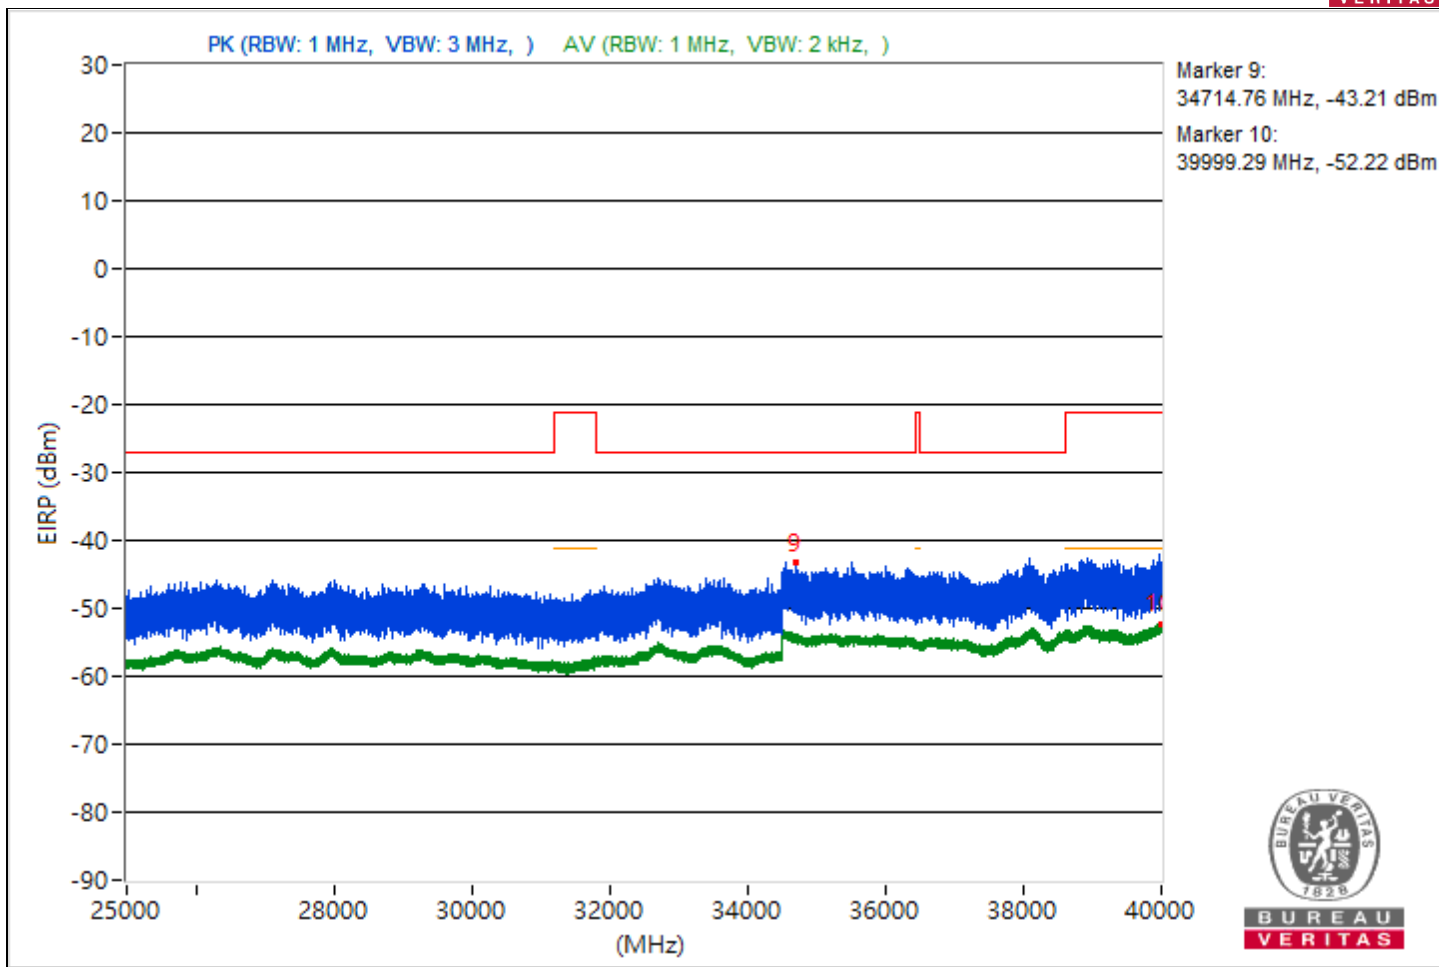



RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4481.57	55.2 PK	68.26	-13.06	-46.62	-50.01	4.92	-40.06
2	3826.68	47.36 AV	54	-6.64	-55.53	-56.16	4.92	-47.9
3	#6426.56	54.85 PK	68.26	-13.41	-53.24	-46.1	4.92	-40.41
4	9001.51	44.53 AV	54	-9.47	-58.32	-59.02	4.92	-50.73
5	#15131.64	55.34 PK	68.26	-12.92	-53.6	-45.46	4.92	-39.92
6	18982.7	46.55 AV	54	-7.45	-56.84	-56.45	4.92	-48.71
7	#23469.2	58.95 PK	68.26	-9.31	-46.62	-42.71	4.92	-36.31
8	23943.7	48.75 AV	54	-5.25	-53.75	-55.26	4.92	-46.51
9	#38089.24	51.52 PK	68.26	-16.74	-50.08	-54.22	4.92	-43.74
10	39967.47	42.61 AV	54	-11.39	-60.03	-61.2	4.92	-52.65

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

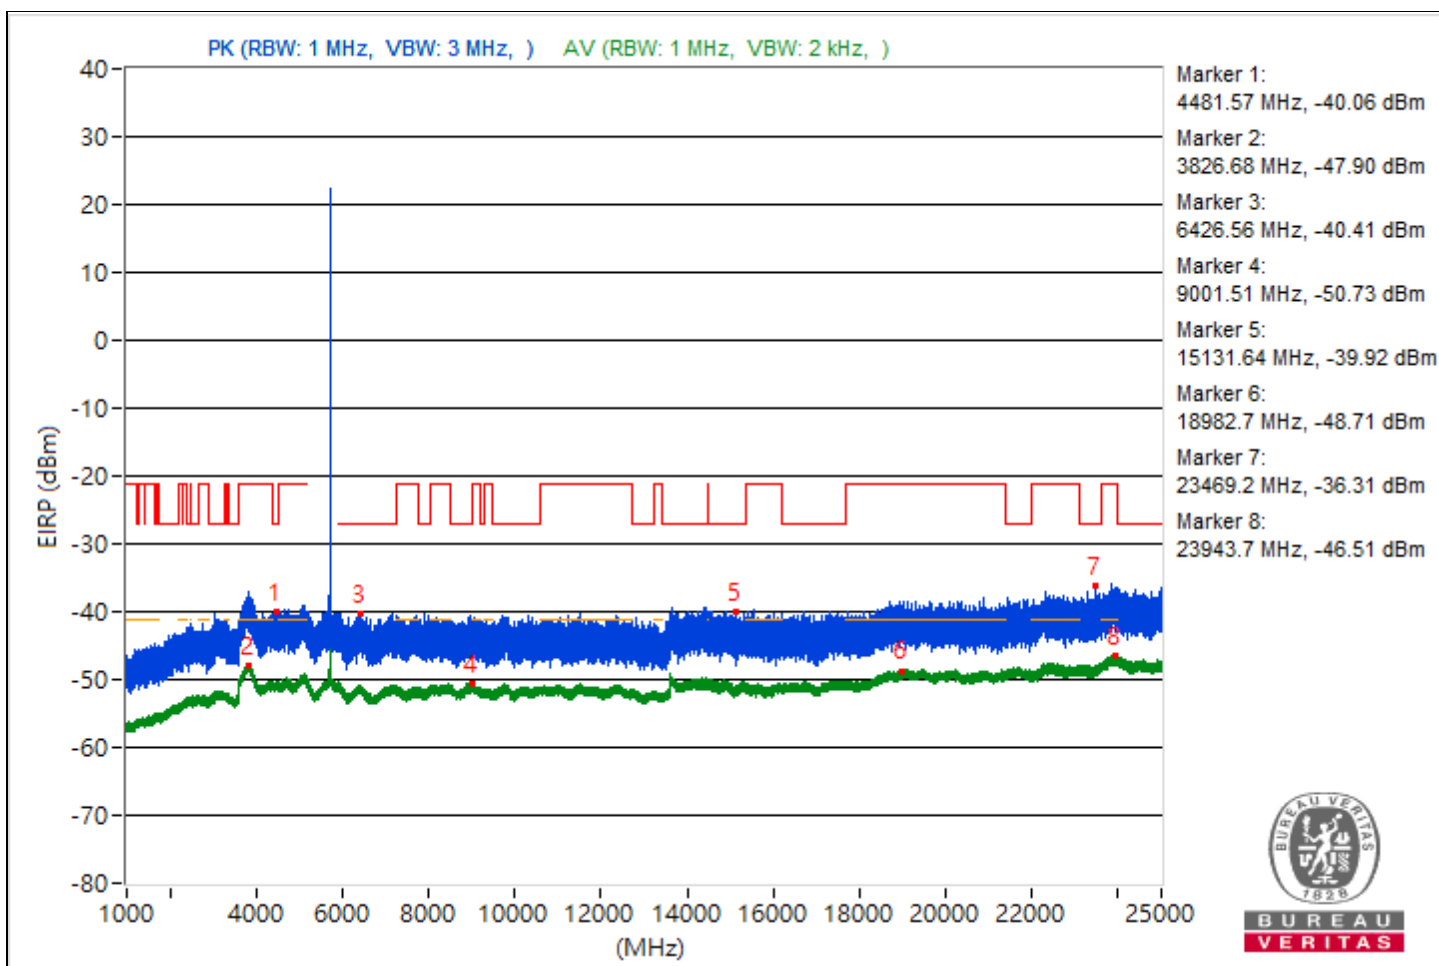

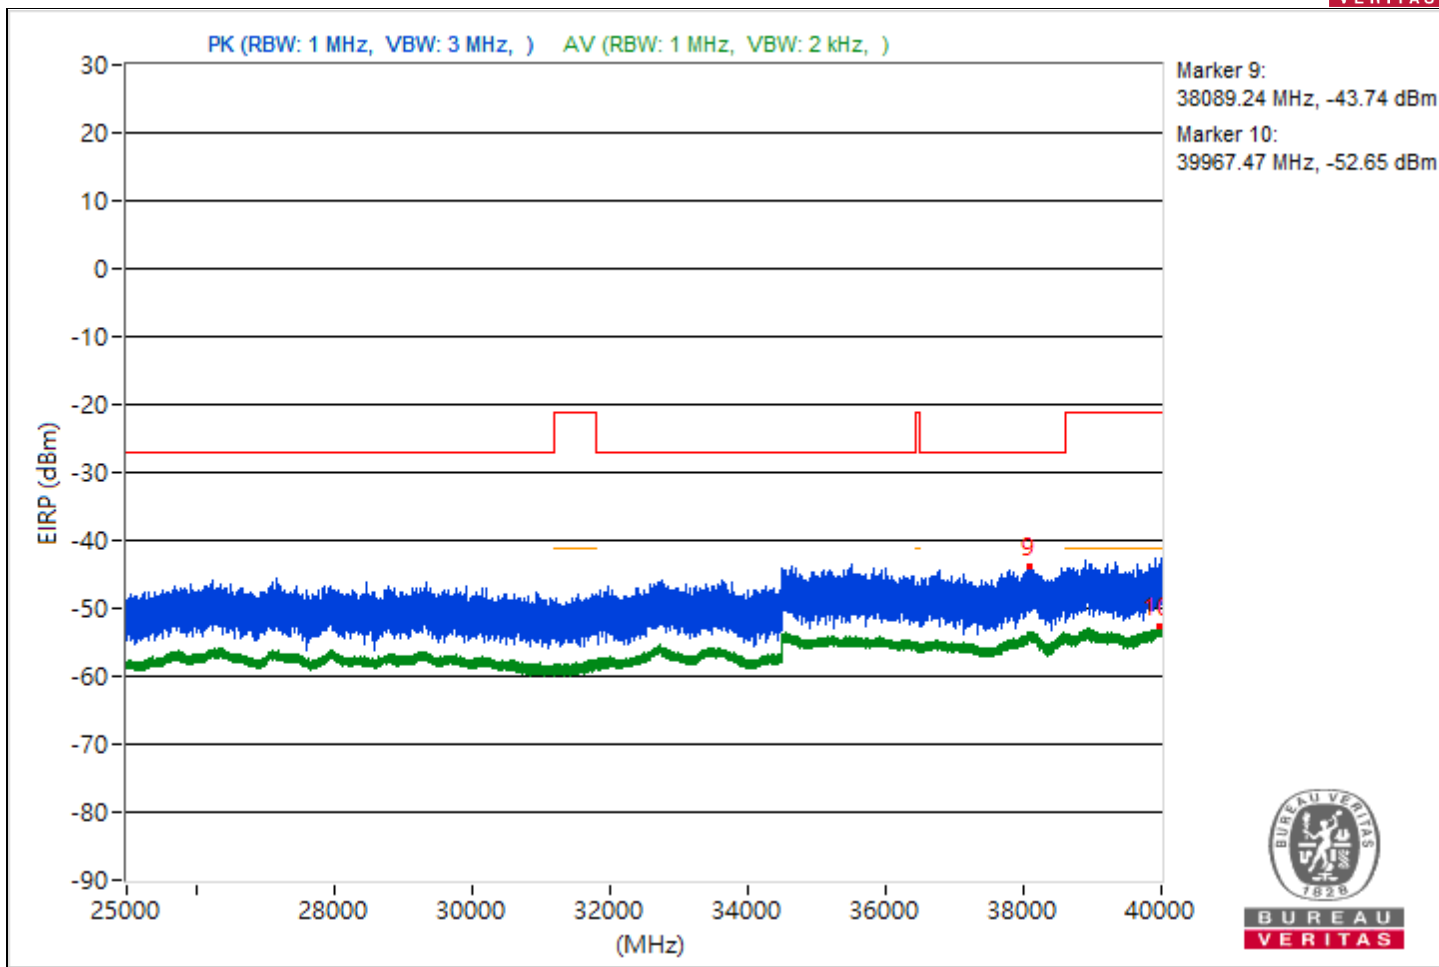



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4451.08	55.12 PK	68.26	-13.14	-47.59	-48.61	4.92	-40.14
2	3830.88	47.6 AV	54	-6.4	-55.87	-55.32	4.92	-47.66
3	#10096.36	55.42 PK	68.26	-12.84	-51.56	-45.78	4.92	-39.84
4	8411.02	44.62 AV	54	-9.38	-58.98	-58.2	4.92	-50.64
5	#13637.6	56.5 PK	68.26	-11.76	-49.22	-45.1	4.92	-38.76
6	18638.5	46.45 AV	54	-7.55	-57.38	-56.18	4.92	-48.81
7	#24067.5	59.33 PK	68.26	-8.93	-41.64	-48.68	4.92	-35.93
8	23905.2	48.97 AV	54	-5.03	-54.45	-54.01	4.92	-46.29
9	#38132.44	51.48 PK	68.26	-16.78	-54.79	-49.93	4.92	-43.78
10	39998.67	42.68 AV	54	-11.32	-60.02	-61.06	4.92	-52.58

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

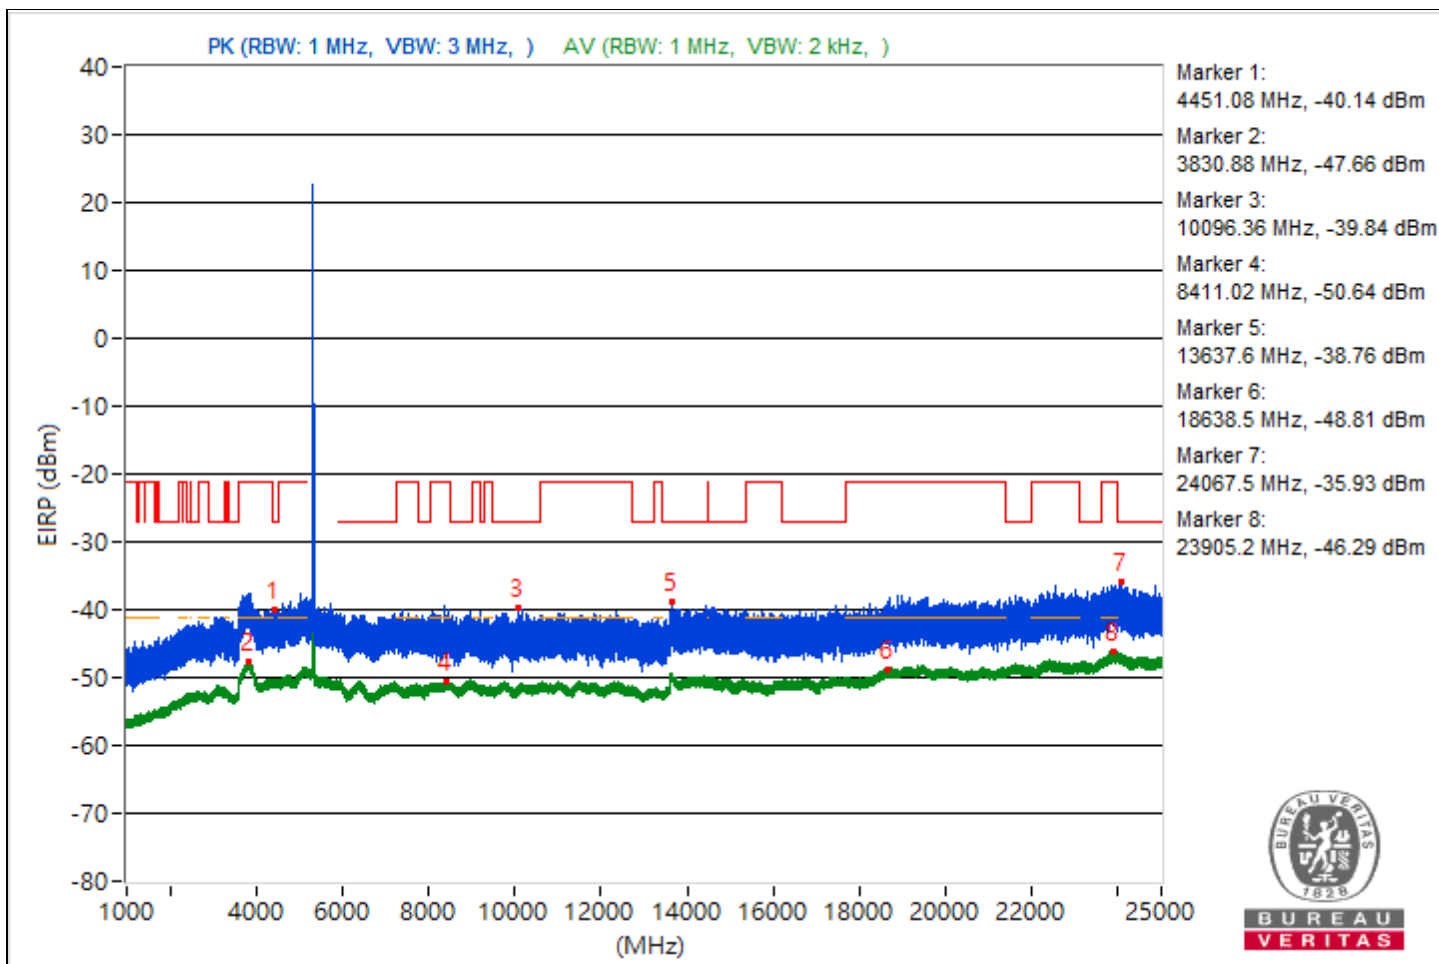

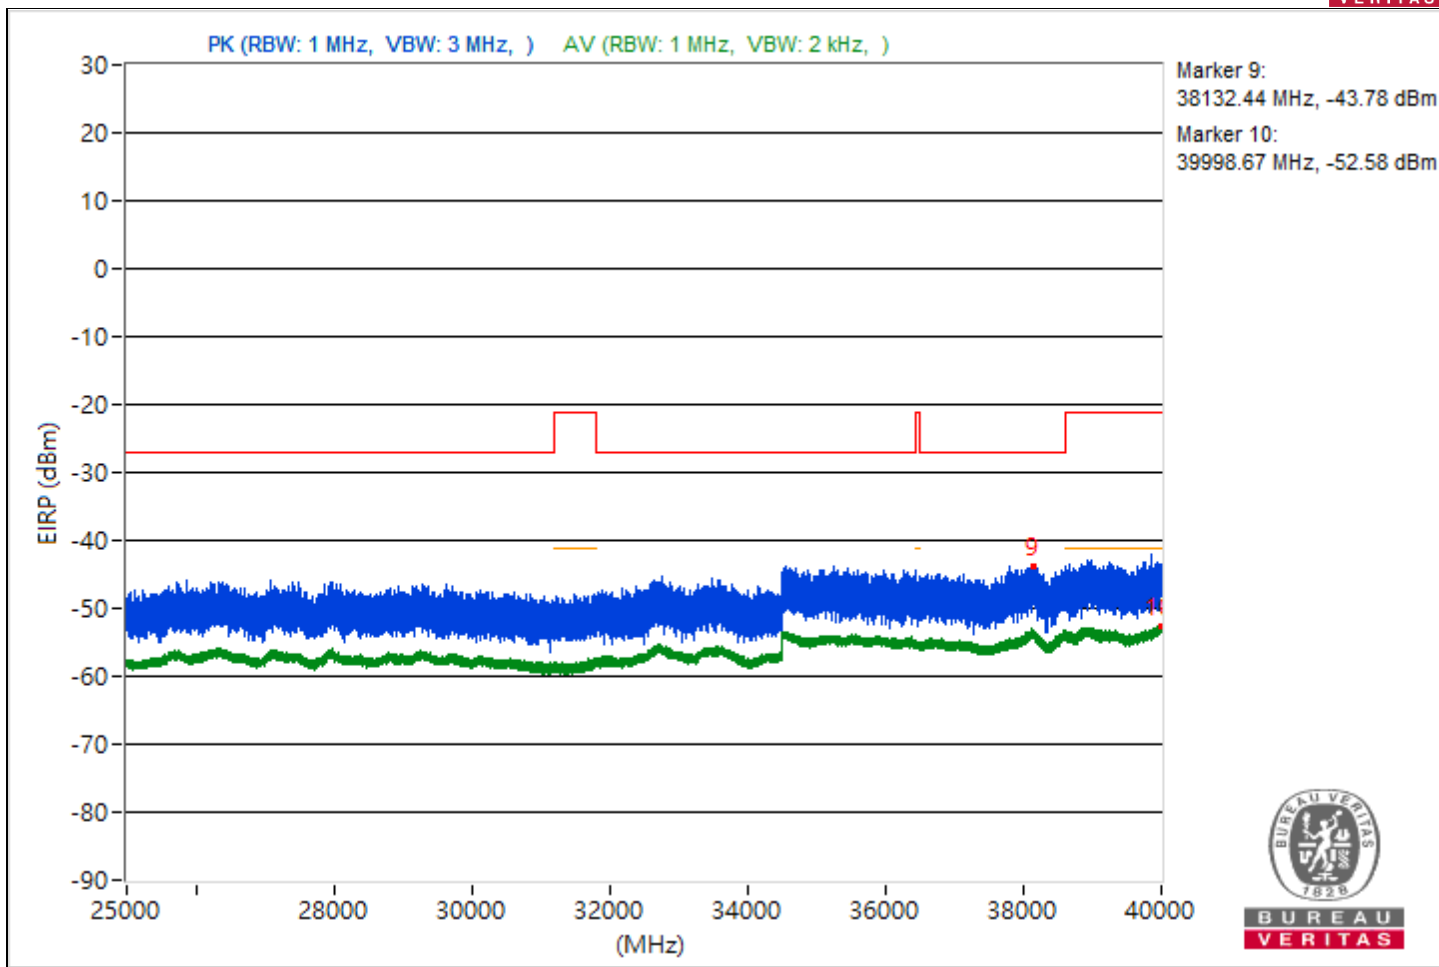



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4424.63	55.33 PK	68.26	-12.93	-46.51	-49.82	4.92	-39.93
2	3826.6	47.37 AV	54	-6.63	-56.1	-55.55	4.92	-47.89
3	#8902.58	54.51 PK	68.26	-13.75	-47.26	-50.8	4.92	-40.75
4	12362.84	44.69 AV	54	-9.31	-59.04	-58.02	4.92	-50.57
5	#14337.16	55.65 PK	68.26	-12.61	-50.09	-45.95	4.92	-39.61
6	18687.8	46.67 AV	54	-7.33	-56.95	-56.13	4.92	-48.59
7	#24031.2	58.87 PK	68.26	-9.39	-47.03	-42.66	4.92	-36.39
8	23985.7	48.99 AV	54	-5.01	-53.7	-54.76	4.92	-46.27
9	#38501.42	51.95 PK	68.26	-16.31	-49.22	-55.14	4.92	-43.31
10	39987.73	42.71 AV	54	-11.29	-59.76	-61.36	4.92	-52.55

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

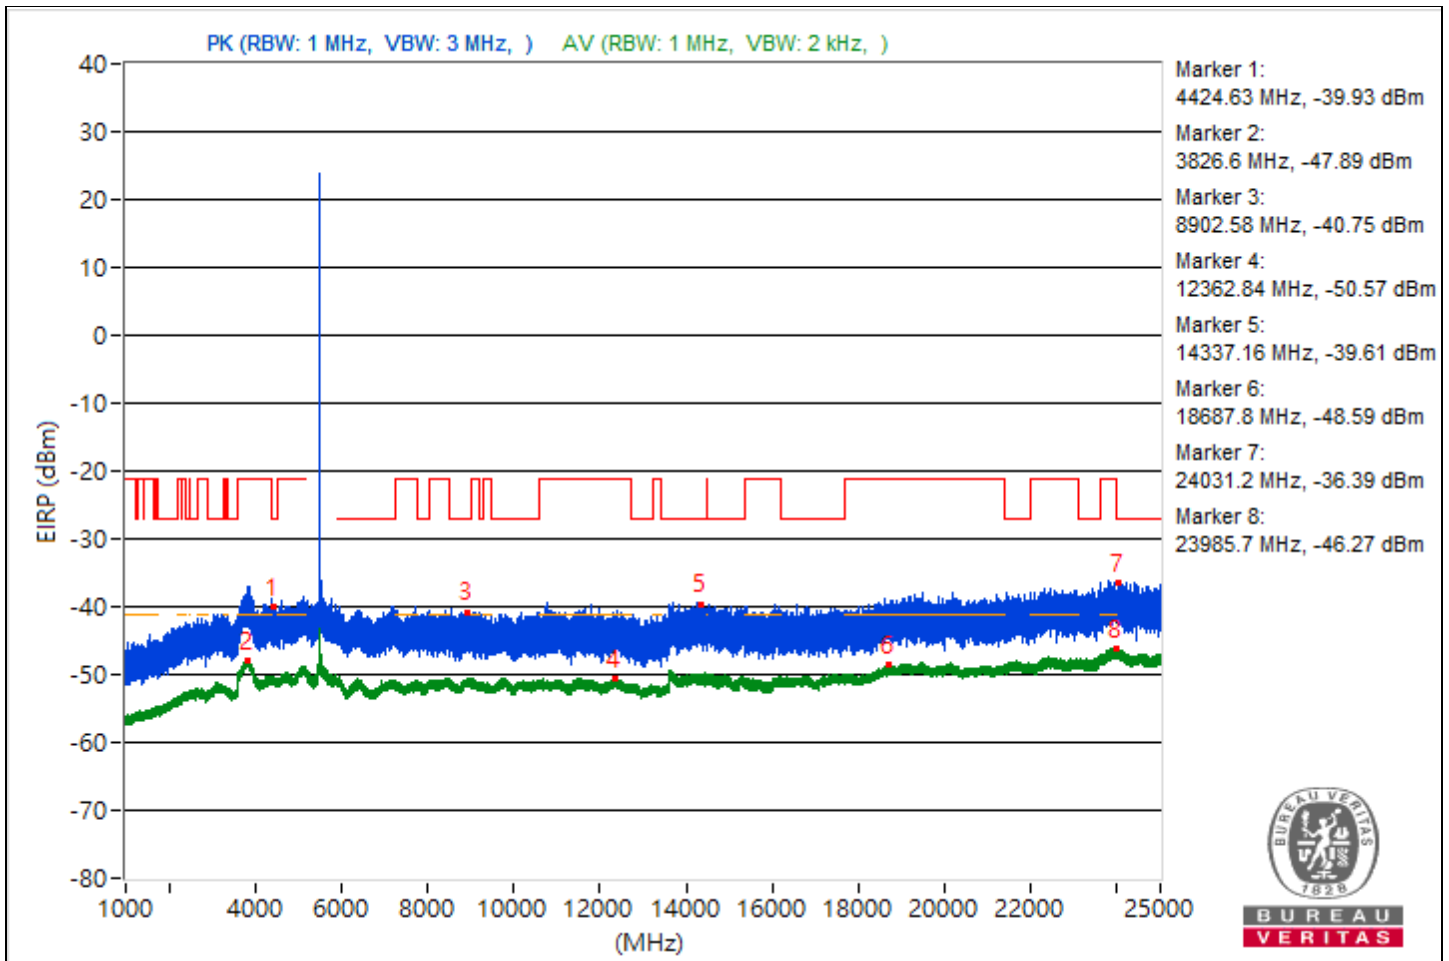

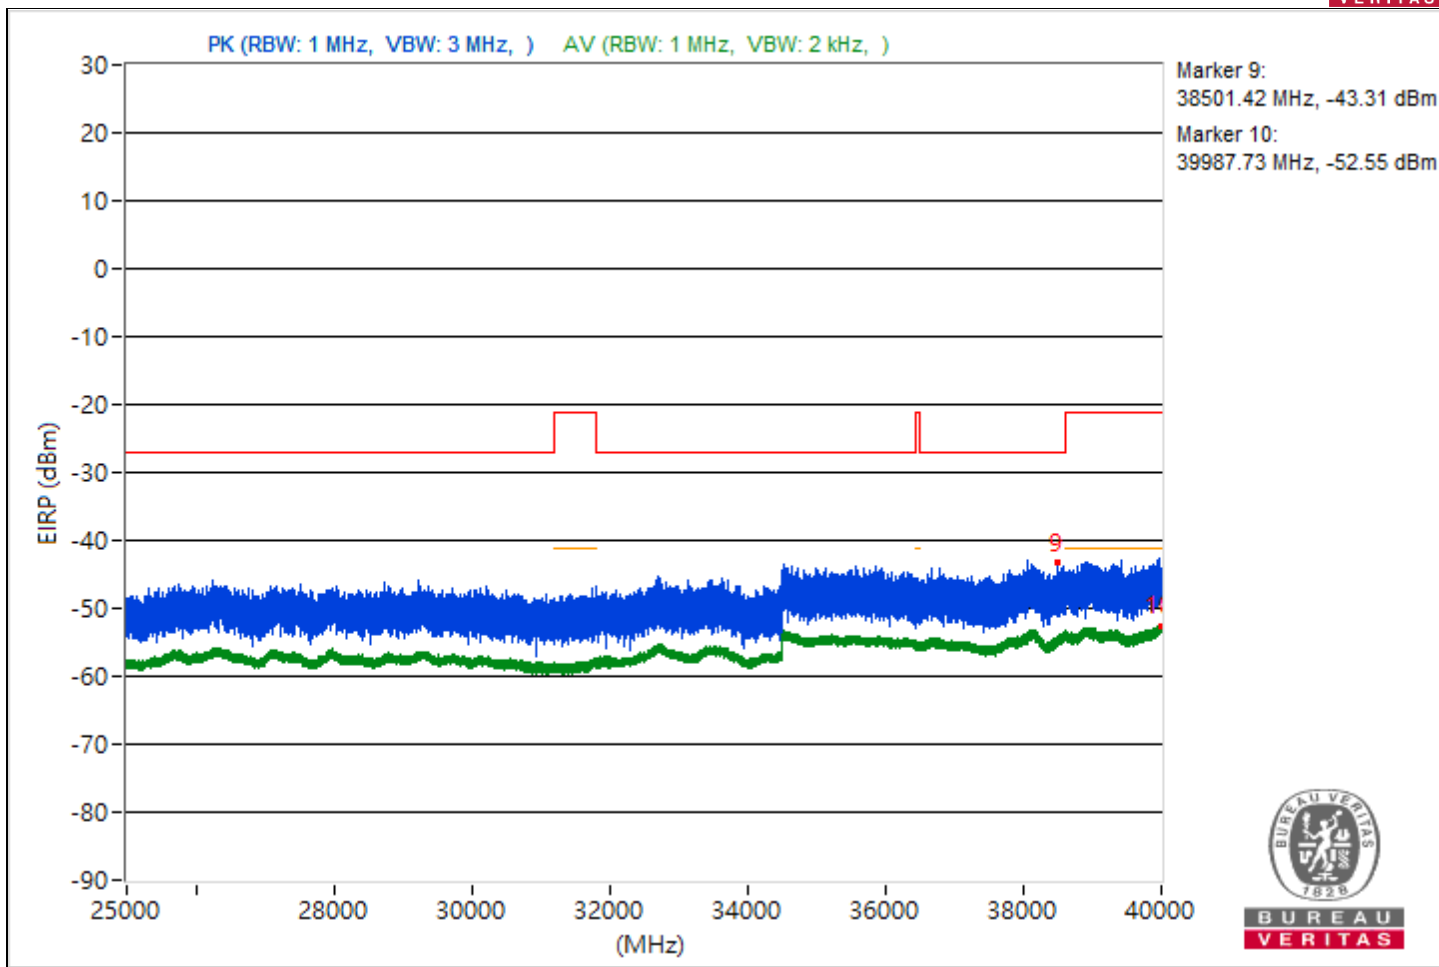



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3232.77	54.96 PK	68.26	-13.3	-46.36	-51.58	4.92	-40.3
2	3807.23	47.56 AV	54	-6.44	-56.03	-55.26	4.92	-47.7
3	#5906.61	55.02 PK	68.26	-13.24	-51.63	-46.28	4.92	-40.24
4	12311.73	44.73 AV	54	-9.27	-58.93	-58.04	4.92	-50.53
5	#13611.91	55.95 PK	68.26	-12.31	-50.52	-45.4	4.92	-39.31
6	18800	46.38 AV	54	-7.62	-56.31	-57.37	4.92	-48.88
7	#24028.5	59.09 PK	68.26	-9.17	-47.11	-42.33	4.92	-36.17
8	23885.2	48.84 AV	54	-5.16	-53.79	-55.01	4.92	-46.42
9	#38116.53	52.69 PK	68.26	-15.57	-52.22	-49.28	4.92	-42.57
10	39960.27	43 AV	54	-11	-60.27	-60.11	4.92	-52.26

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

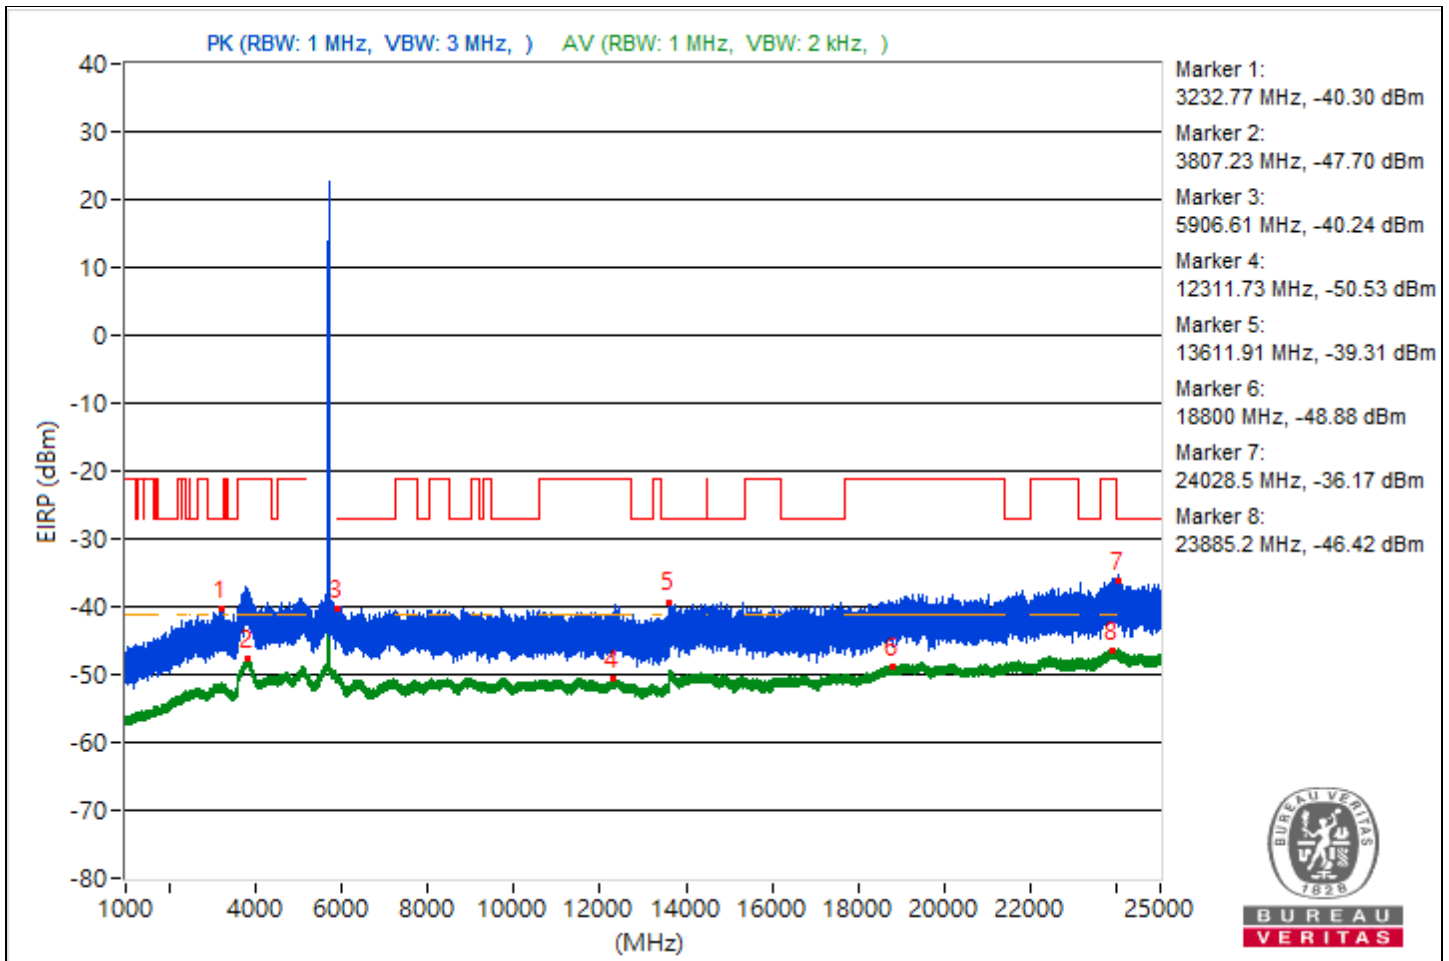

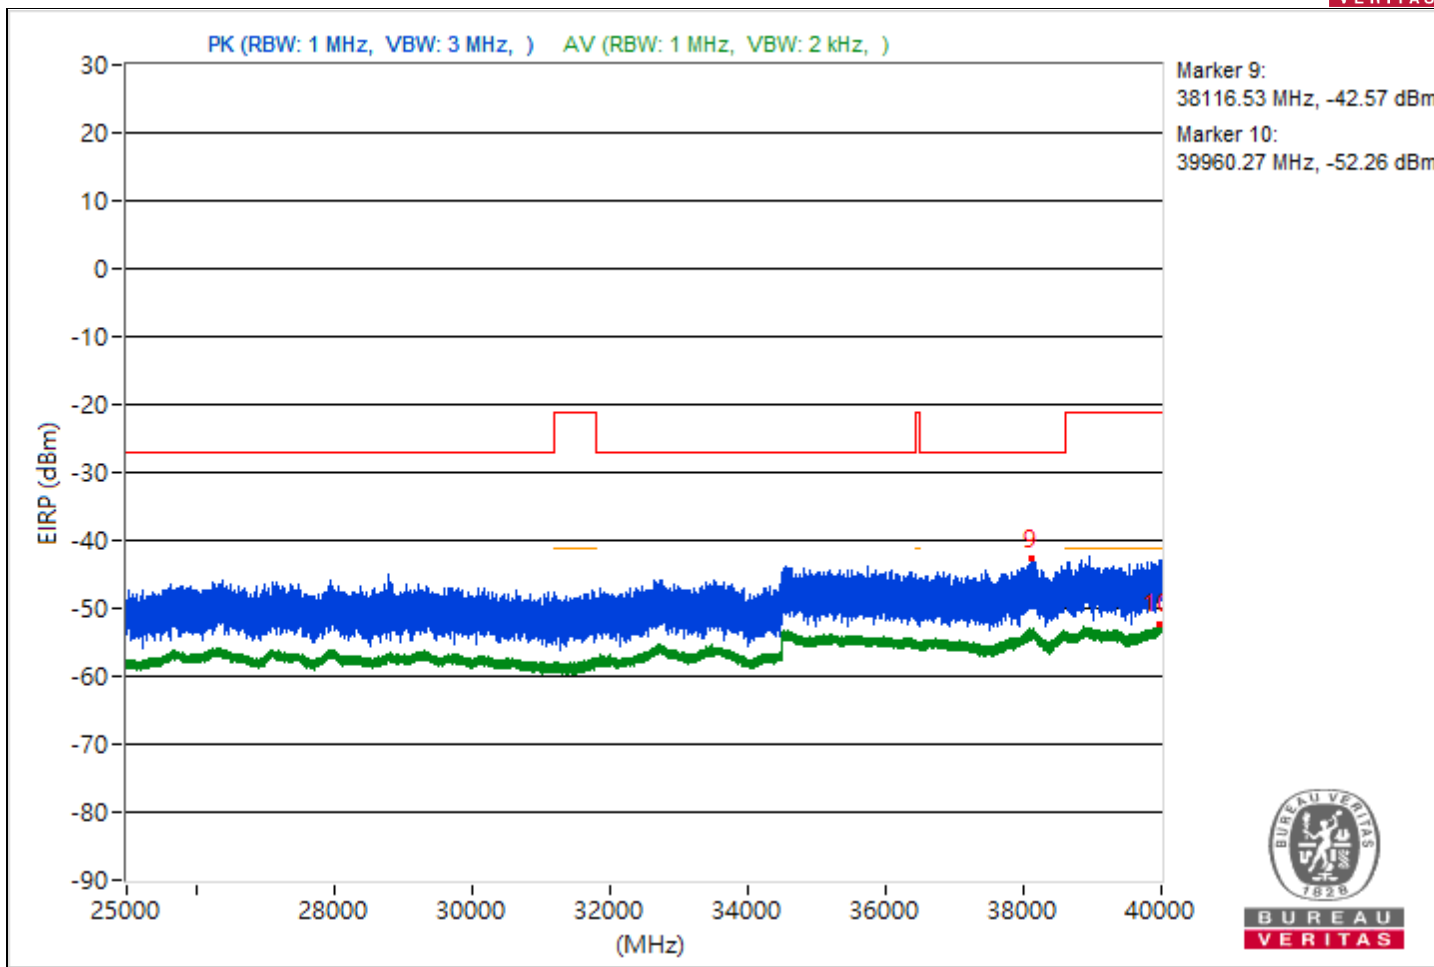



RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4448.28	54.5 PK	68.26	-13.76	-47.19	-50.98	4.92	-40.76
2	3831.73	47.49 AV	54	-6.51	-55.33	-56.11	4.92	-47.77
3	#5987.27	54.86 PK	68.26	-13.4	-46.29	-52.31	4.92	-40.4
4	8460.09	44.56 AV	54	-9.44	-59.14	-58.18	4.92	-50.7
5	#13605.69	55.96 PK	68.26	-12.3	-45.94	-49.08	4.92	-39.3
6	18968	46.26 AV	54	-7.74	-56.41	-57.51	4.92	-49
7	#24021.8	59.86 PK	68.26	-8.4	-45.88	-41.74	4.92	-35.4
8	23856.4	48.81 AV	54	-5.19	-53.73	-55.14	4.92	-46.45
9	#35549.87	51.8 PK	68.26	-16.46	-49.44	-55.05	4.92	-43.46
10	39996.71	42.58 AV	54	-11.42	-60.95	-60.3	4.92	-52.68

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

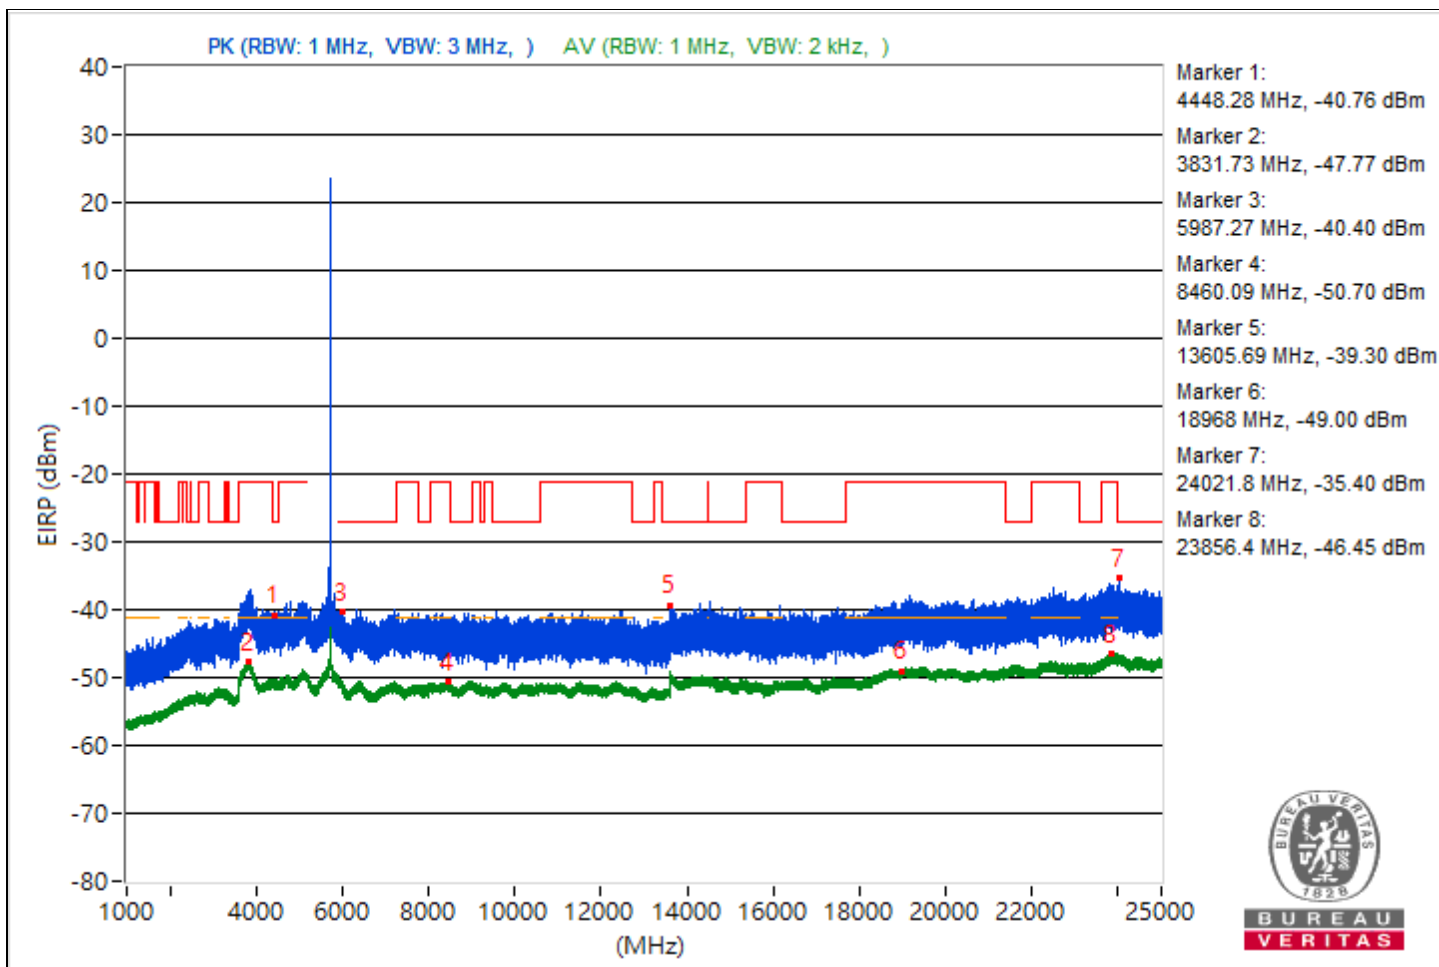


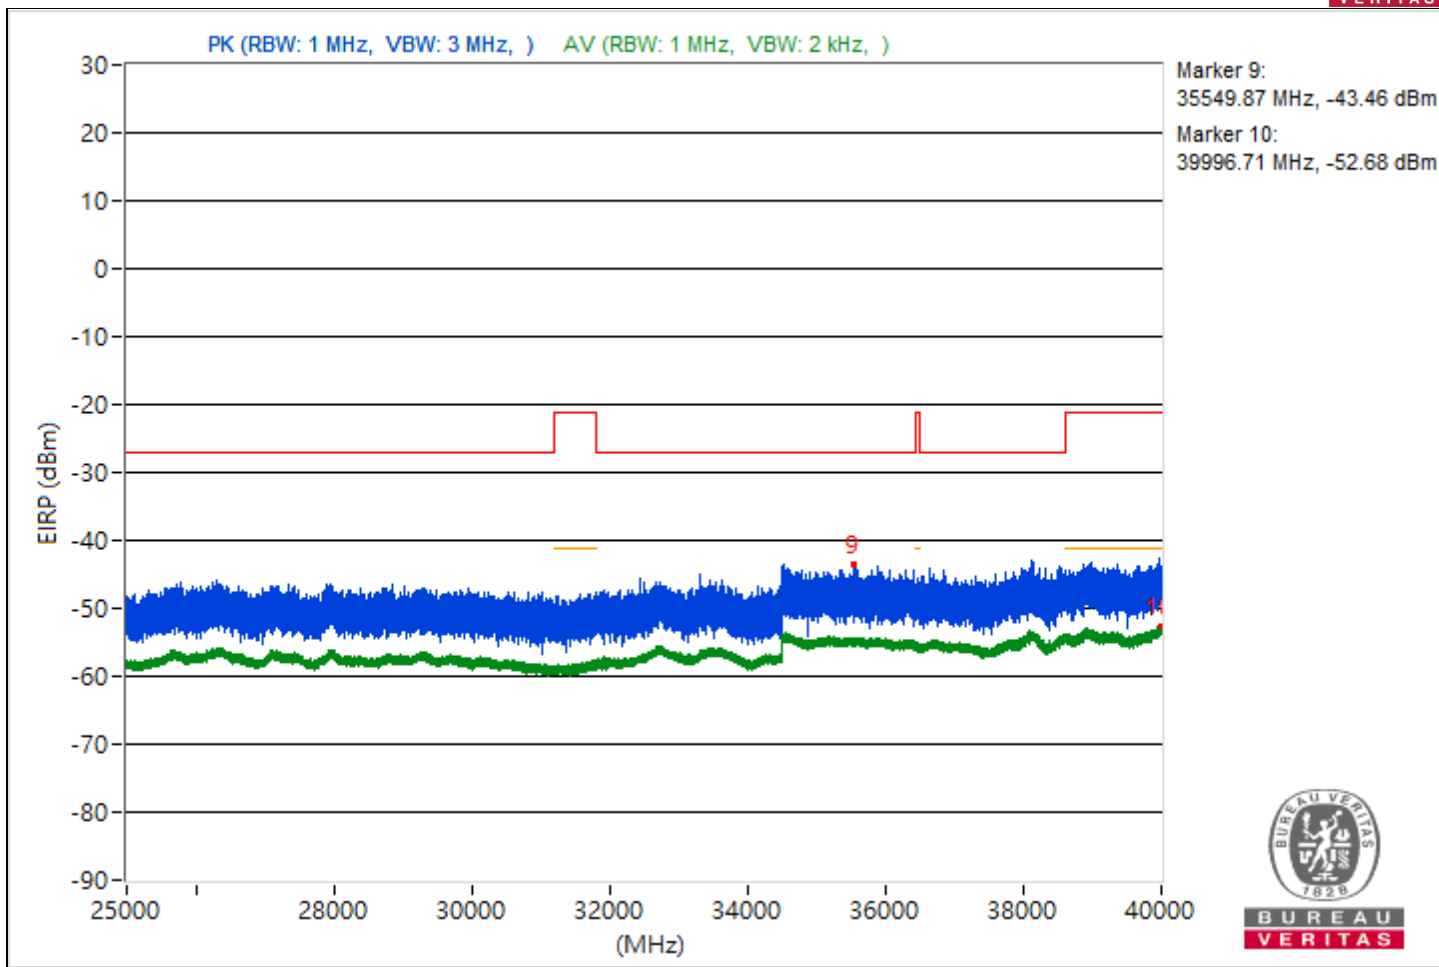


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4422.3	55.23 PK	68.26	-13.03	-45.9	-52.01	4.92	-40.03
2	3783.04	47.43 AV	54	-6.57	-55.2	-56.41	4.92	-47.83
3	#8981.16	55.08 PK	68.26	-13.18	-53.21	-45.83	4.92	-40.18
4	11515.47	44.65 AV	54	-9.35	-58.16	-58.96	4.92	-50.61
5	#17652.4	55.81 PK	68.26	-12.45	-51.64	-45.27	4.92	-39.45
6	18731.2	46.54 AV	54	-7.46	-57.31	-56.08	4.92	-48.72
7	#24420.8	58.61 PK	68.26	-9.65	-42.8	-47.68	4.92	-36.65
8	23908.3	49.04 AV	54	-4.96	-54.47	-53.86	4.92	-46.22
9	#38146.67	51.89 PK	68.26	-16.37	-55.86	-49.12	4.92	-43.37
10	39995.91	43.36 AV	54	-10.64	-59.53	-60.16	4.92	-51.9

- Notes:
1. Margin value = Emission Level - Limit value
 2. " # ": The radiated frequency is out of the restricted band.

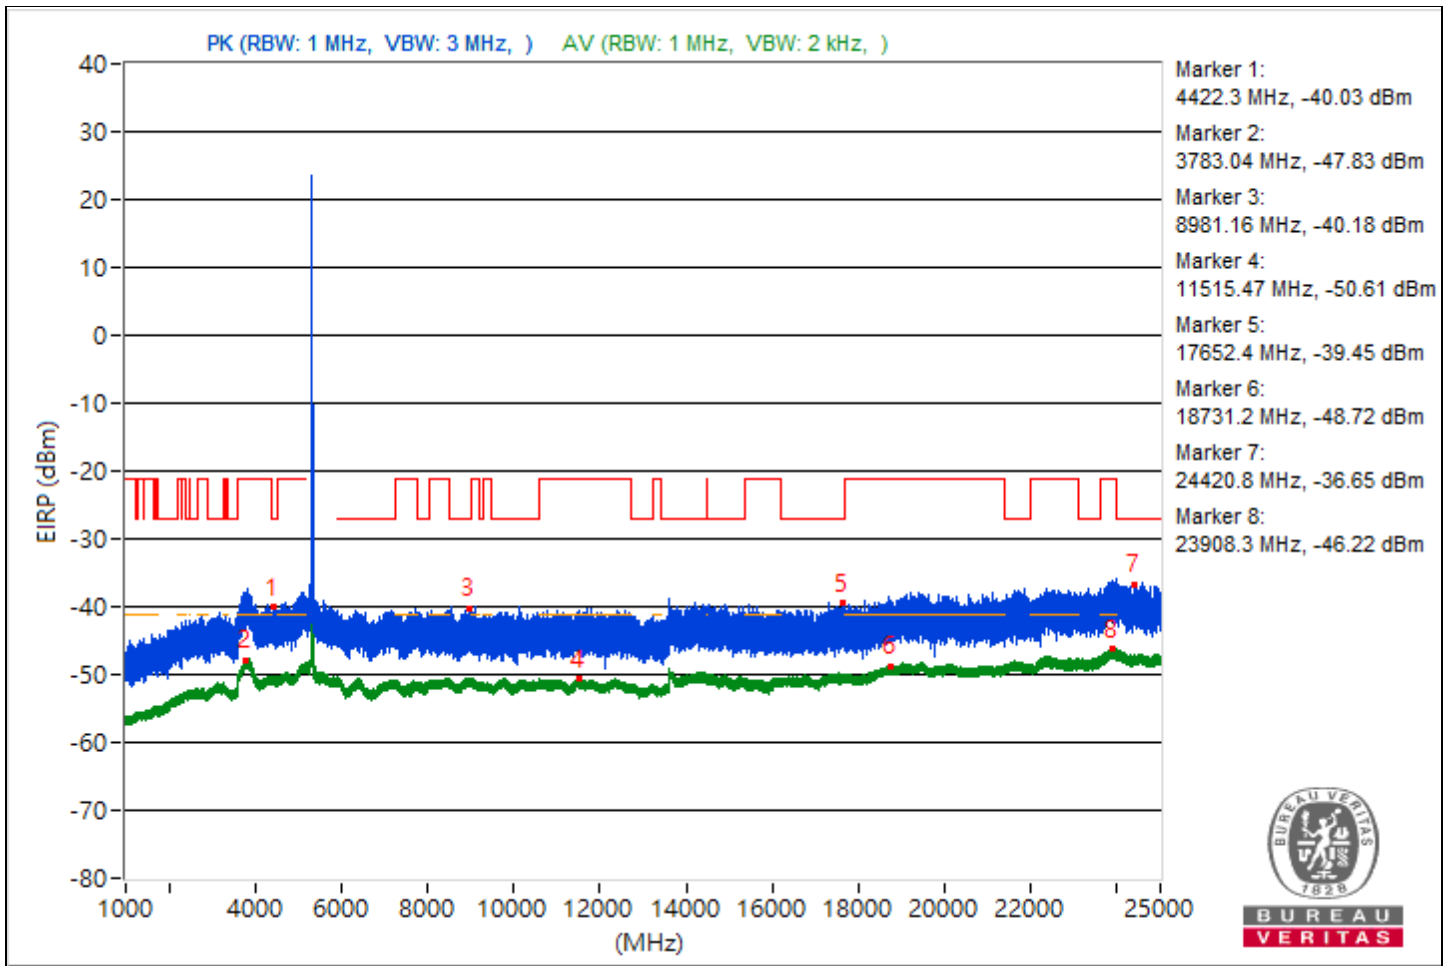

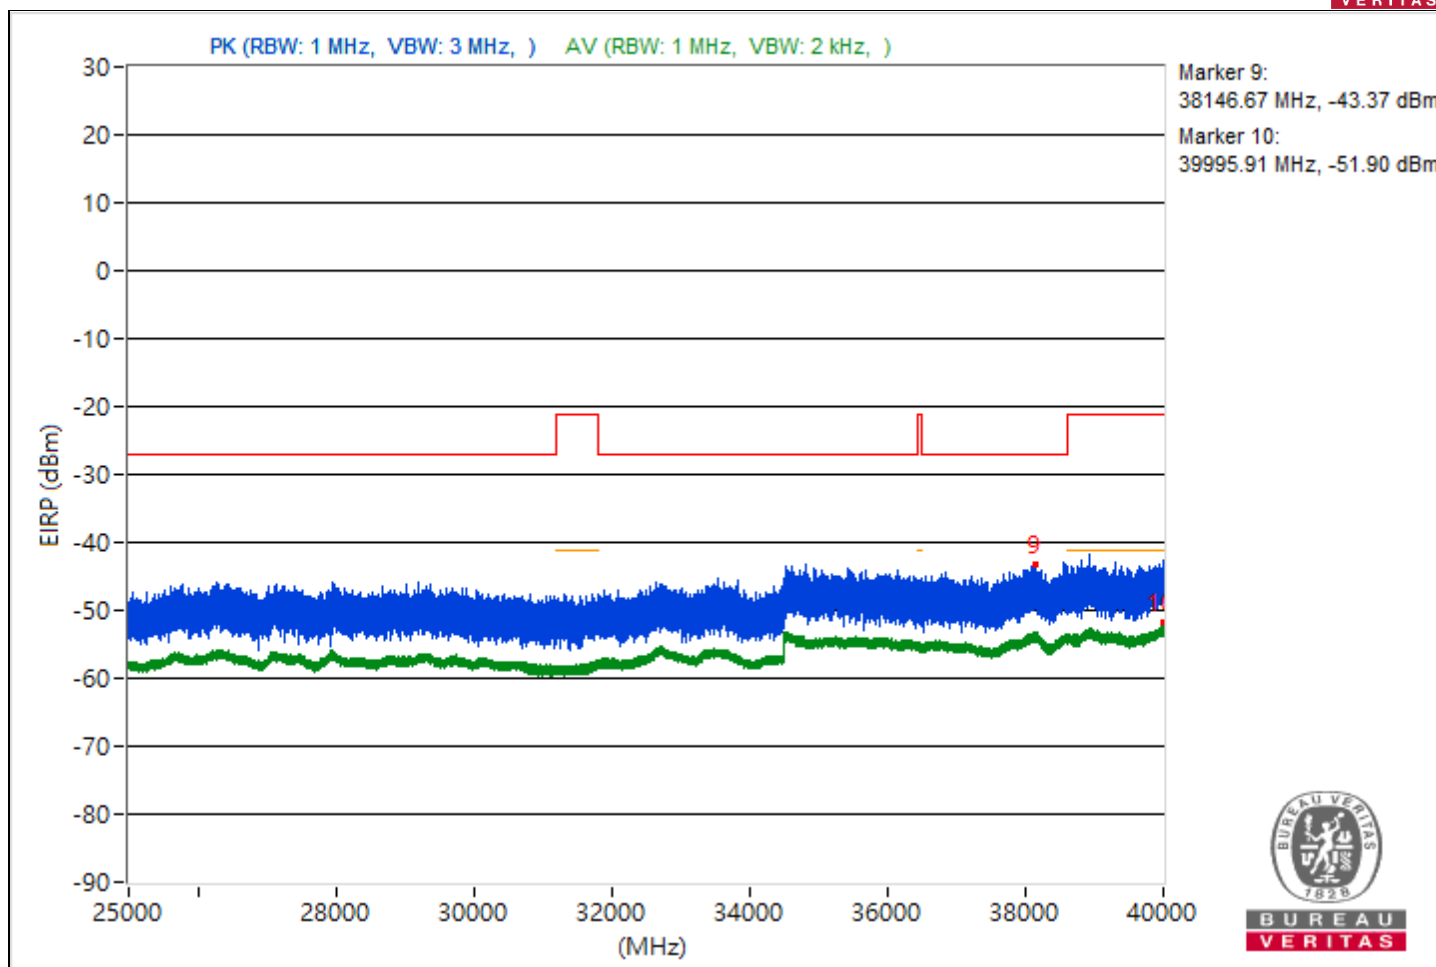



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4423.78	54.7 PK	68.26	-13.56	-47.25	-50.24	4.92	-40.56
2	3824.11	47.65 AV	54	-6.35	-55.26	-55.84	4.92	-47.61
3	#7211.41	55.96 PK	68.26	-12.3	-45.42	-50.41	4.92	-39.3
4	9023.73	44.73 AV	54	-9.27	-57.89	-59.11	4.92	-50.53
5	#15249.78	55.95 PK	68.26	-12.31	-48.99	-45.99	4.92	-39.31
6	18922.5	46.62 AV	54	-7.38	-56.06	-57.14	4.92	-48.64
7	#24191	59.05 PK	68.26	-9.21	-42.49	-46.82	4.92	-36.21
8	23892.2	49 AV	54	-5	-54.47	-53.93	4.92	-46.26
9	#38202.84	51.68 PK	68.26	-16.58	-49.49	-55.38	4.92	-43.58
10	39999.11	42.94 AV	54	-11.06	-60.52	-60	4.92	-52.32

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

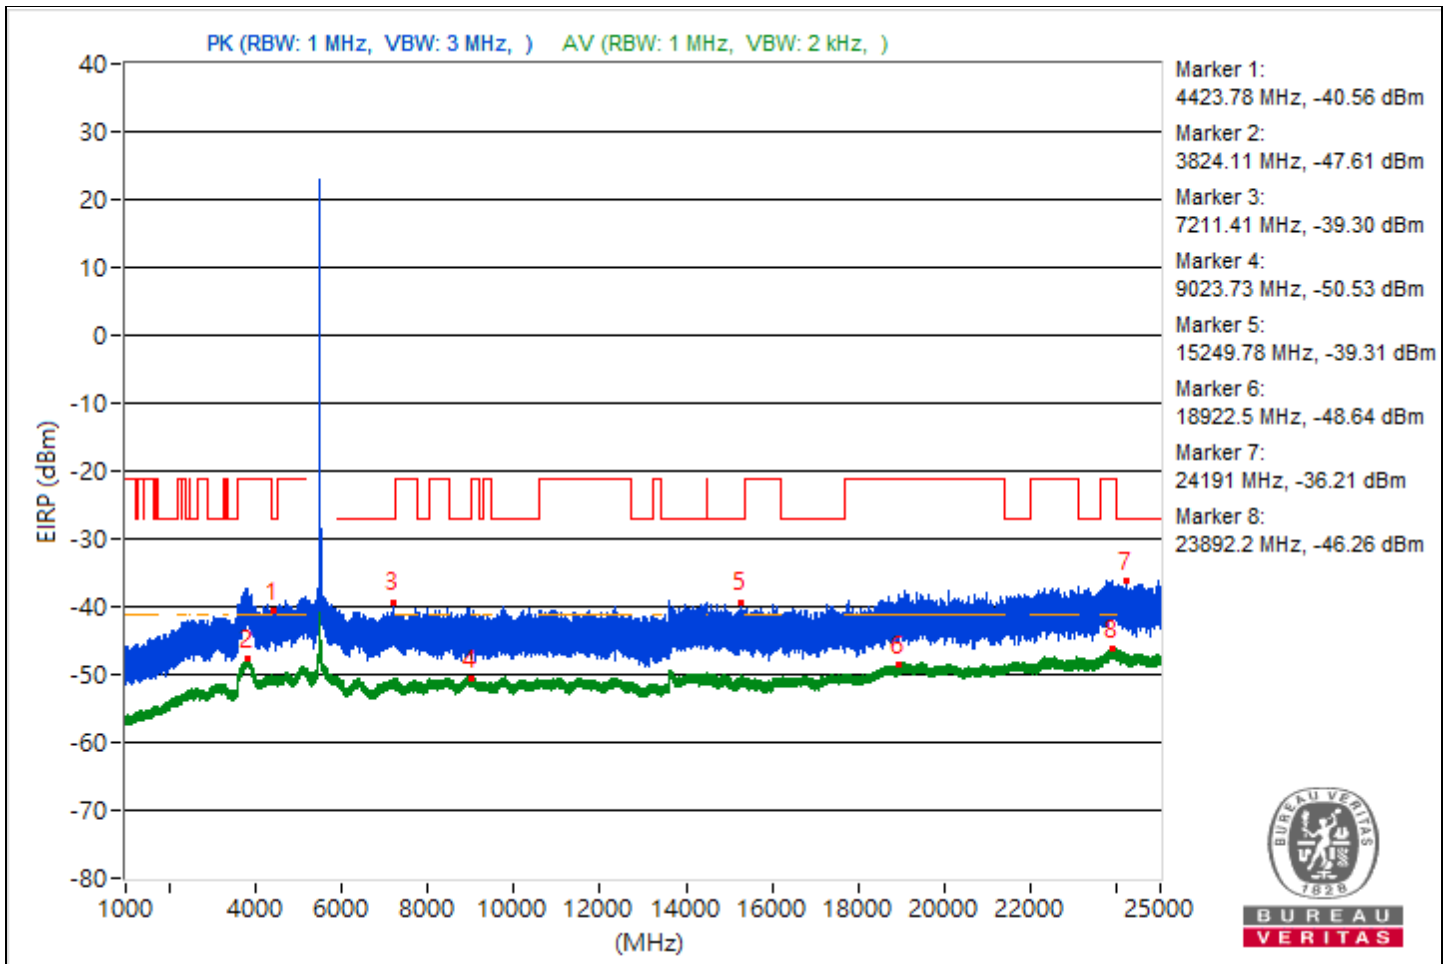

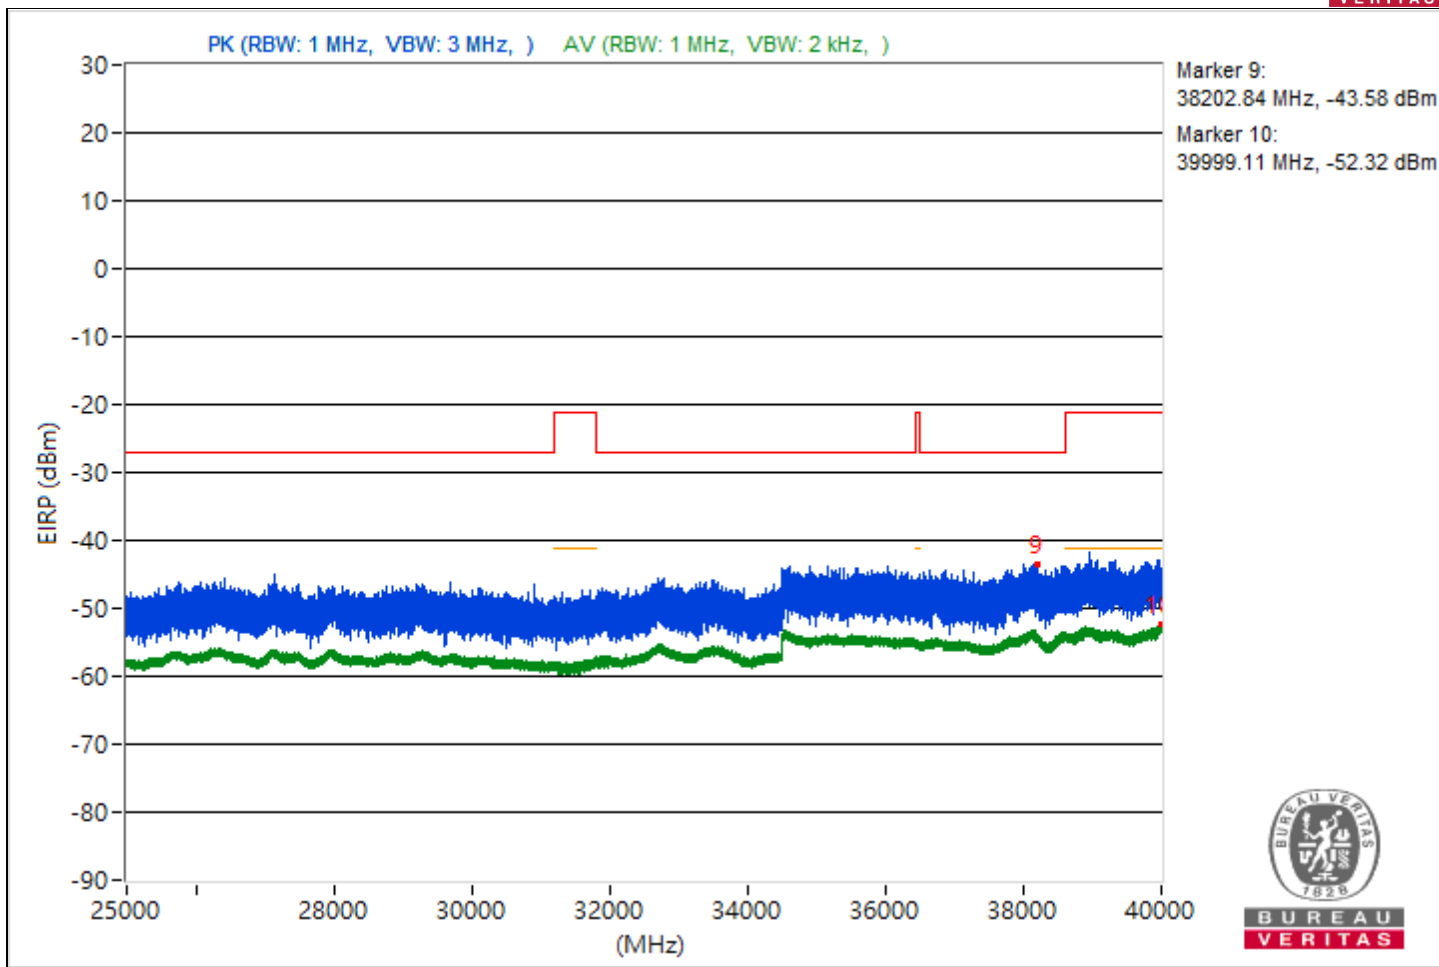



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4449.99	54.85 PK	68.26	-13.41	-46.79	-50.76	4.92	-40.41
2	3827.84	47.47 AV	54	-6.53	-56.22	-55.27	4.92	-47.79
3	#5941.84	55.74 PK	68.26	-12.52	-49.55	-46.04	4.92	-39.52
4	8405.6	44.54 AV	54	-9.46	-58.16	-59.21	4.92	-50.72
5	#13653.78	56.55 PK	68.26	-11.71	-47.98	-45.62	4.92	-38.71
6	18975.5	46.56 AV	54	-7.44	-56.98	-56.31	4.92	-48.7
7	#24190.1	59.72 PK	68.26	-8.54	-46.73	-41.64	4.92	-35.54
8	23758.4	48.89 AV	54	-5.11	-53.81	-54.85	4.92	-46.37
9	#38179.38	51.95 PK	68.26	-16.31	-55.7	-49.09	4.92	-43.31
10	39998.93	42.91 AV	54	-11.09	-60.45	-60.11	4.92	-52.35

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

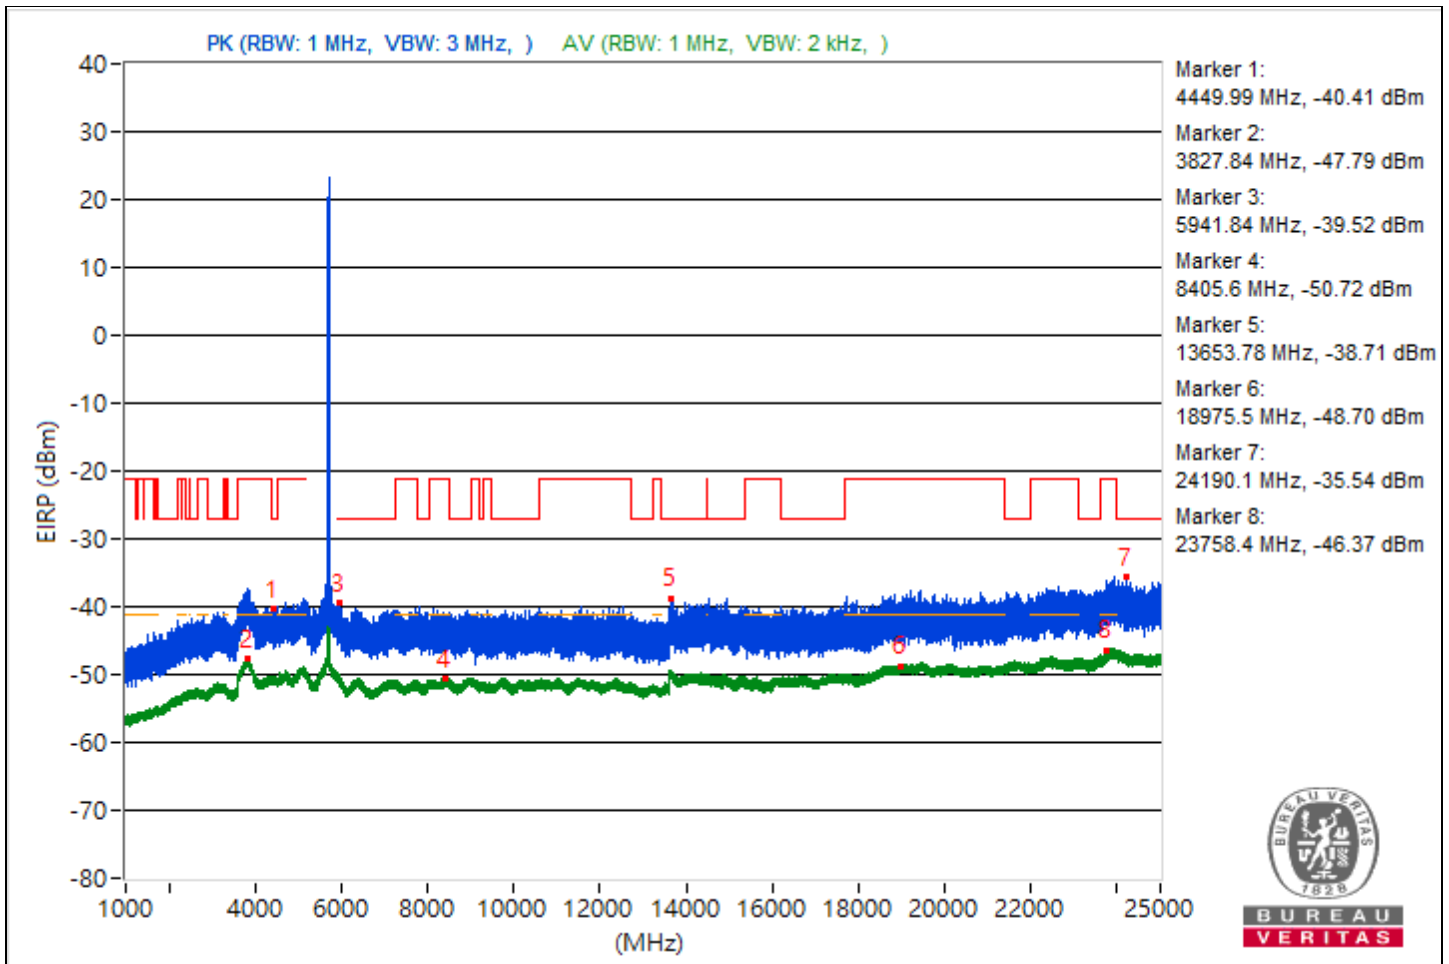

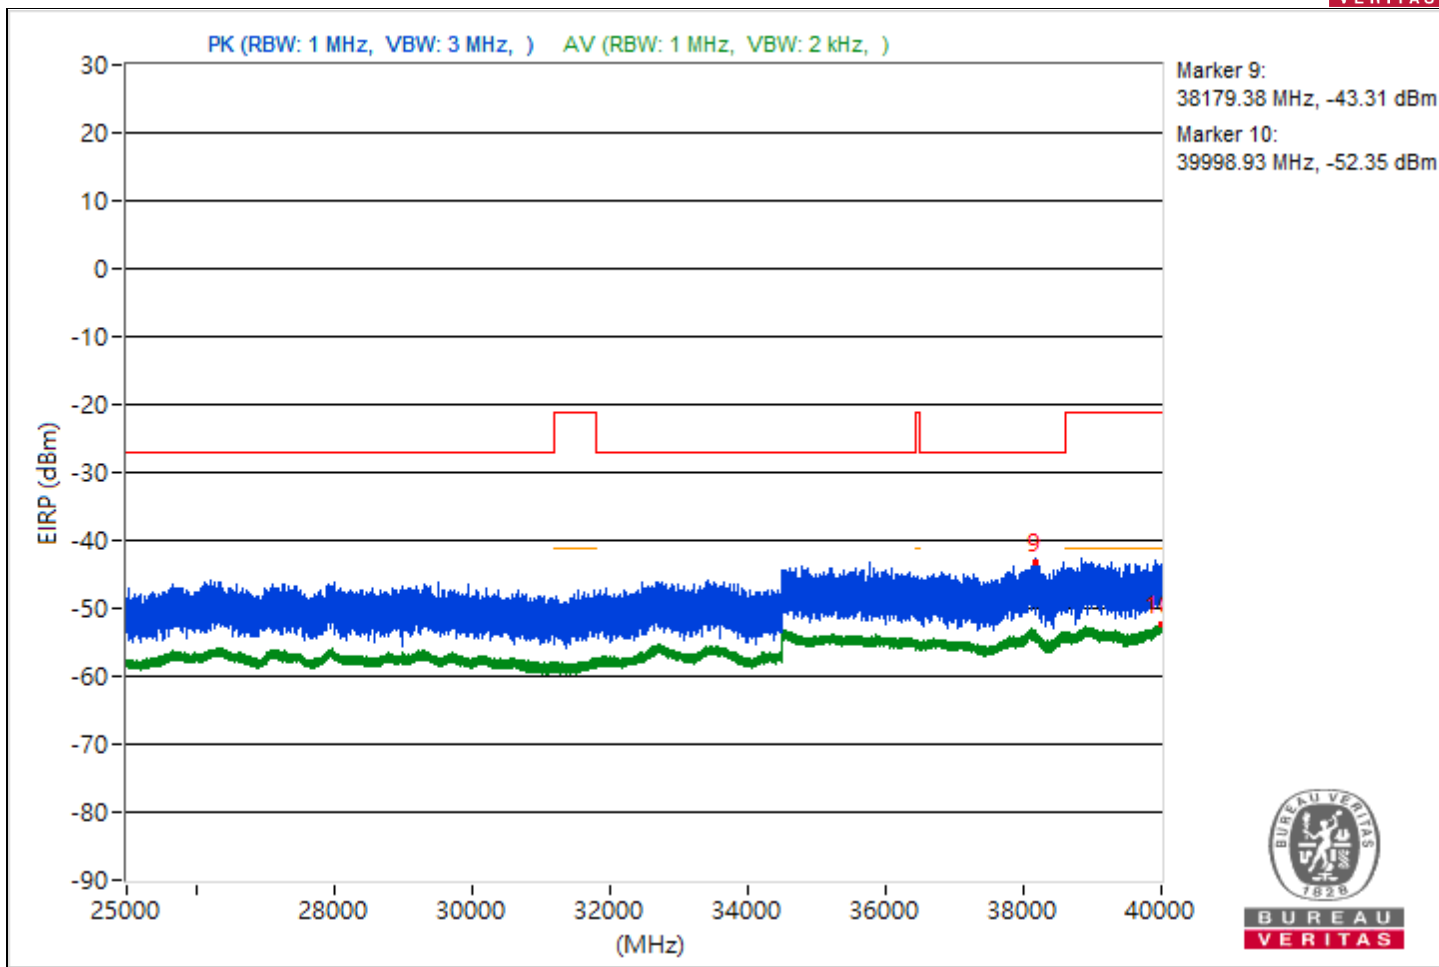



RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4463.83	55 PK	68.26	-13.26	-46.53	-50.92	4.92	-40.26
2	3785.46	47.3 AV	54	-6.7	-55.34	-56.53	4.92	-47.96
3	#6445.22	55.17 PK	68.26	-13.09	-49.92	-46.71	4.92	-40.09
4	12391.2	44.4 AV	54	-9.6	-57.98	-59.78	4.92	-50.86
5	#14304.53	56.35 PK	68.26	-11.91	-49.55	-45.19	4.92	-38.91
6	18991	46.47 AV	54	-7.53	-57.04	-56.41	4.92	-48.79
7	#24929	59.11 PK	68.26	-9.15	-41.91	-48.63	4.92	-36.15
8	23953.8	48.62 AV	54	-5.38	-53.91	-55.34	4.92	-46.64
9	#38556.98	52.79 PK	68.26	-15.47	-55.5	-48.12	4.92	-42.47
10	39987.11	42.57 AV	54	-11.43	-60.89	-60.36	4.92	-52.69

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

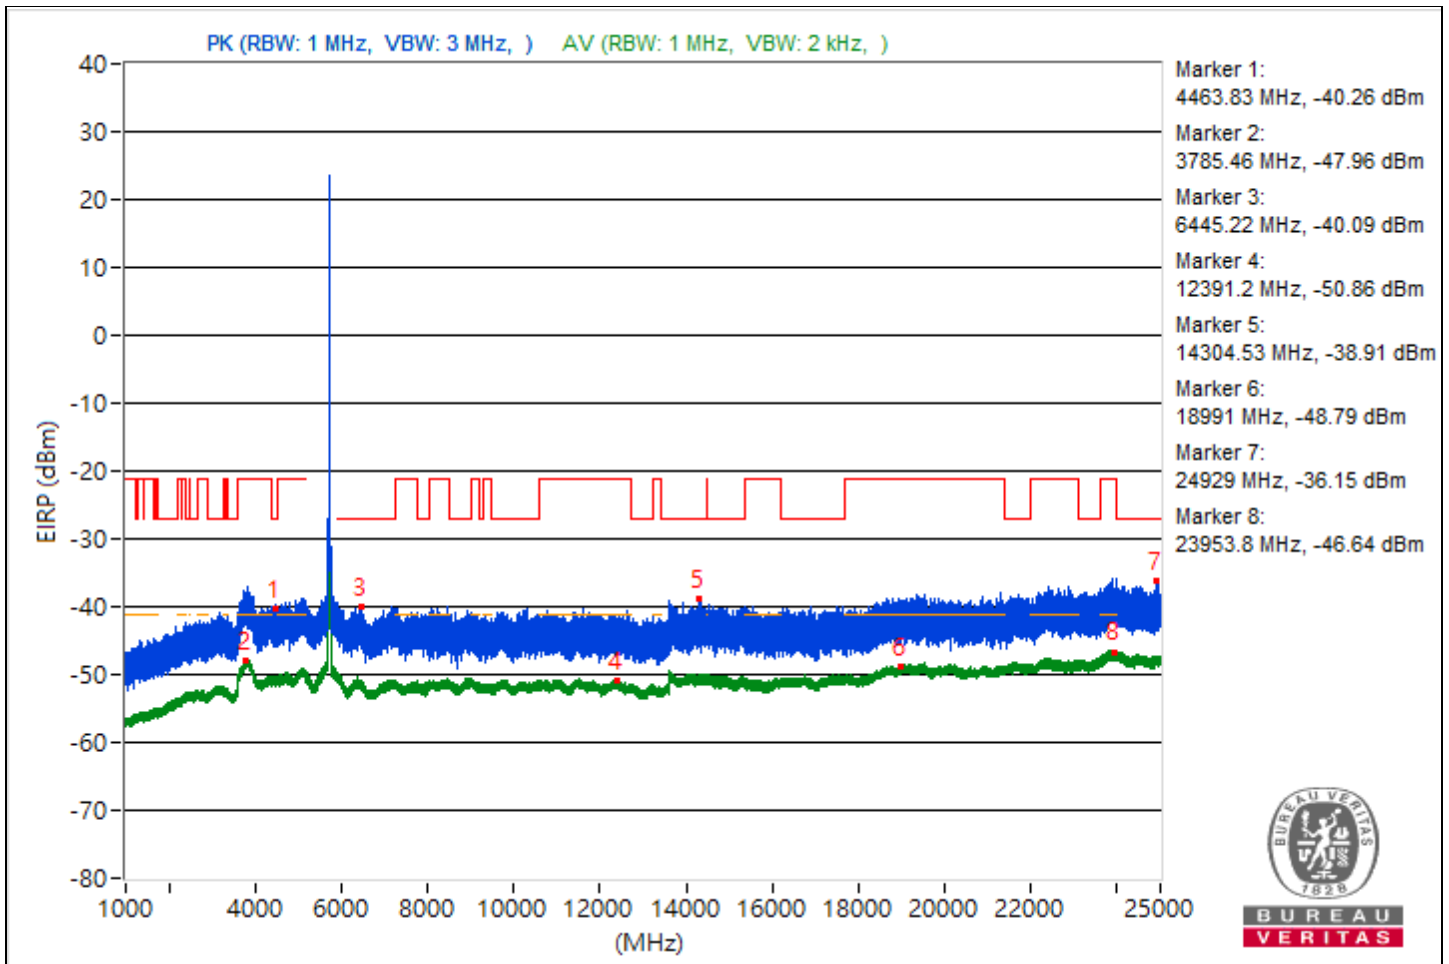

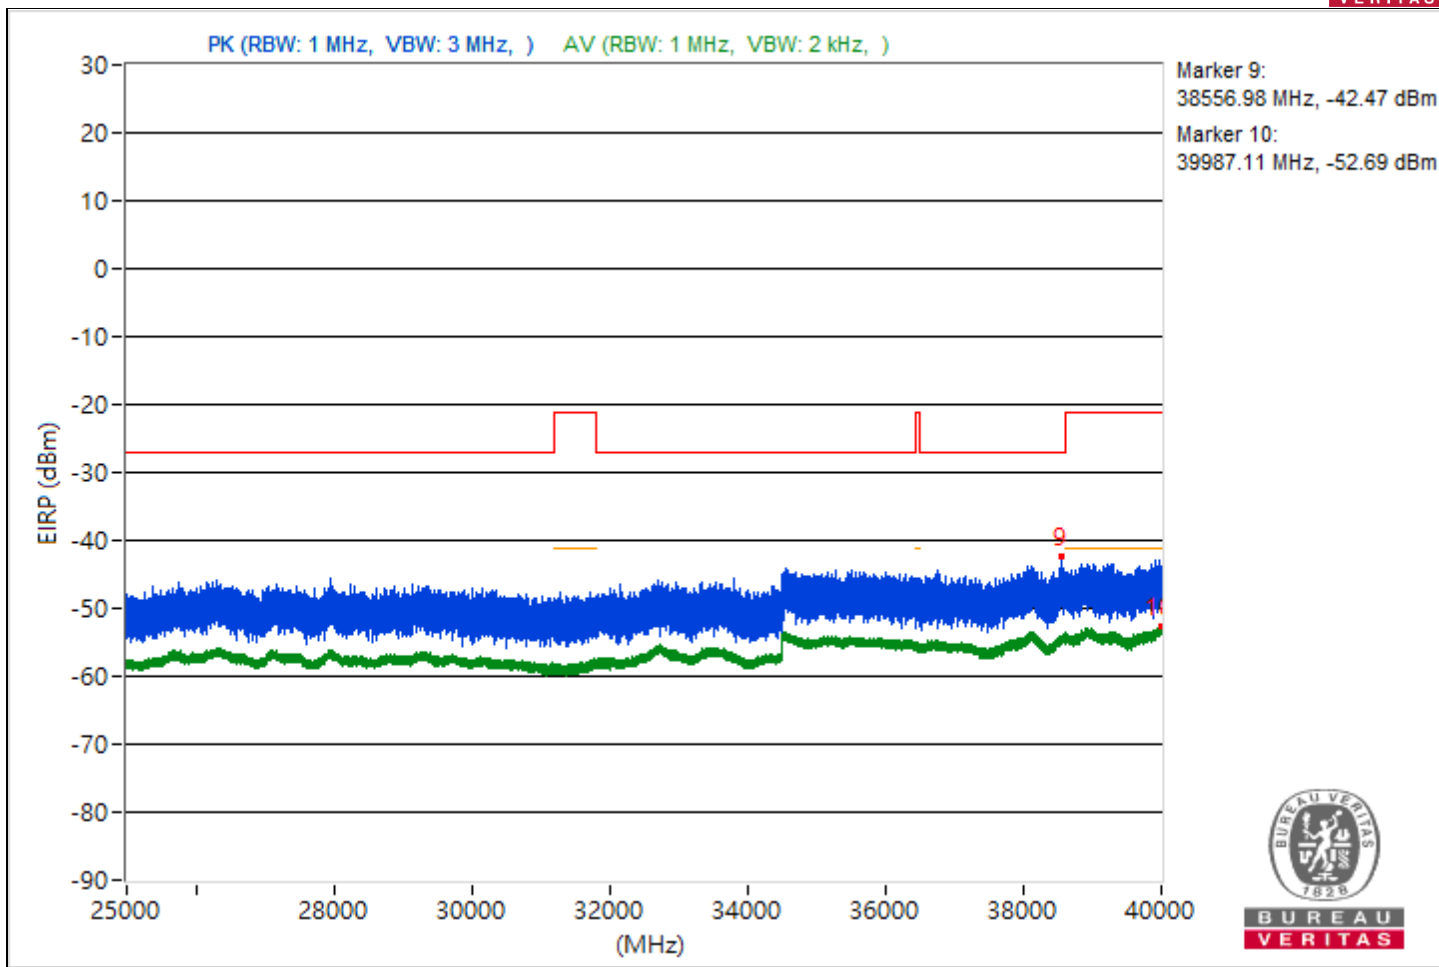



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4449.91	55.17 PK	68.26	-13.09	-52.31	-45.91	4.92	-40.09
2	3827.14	47.71 AV	54	-6.29	-55.34	-55.61	4.92	-47.55
3	#8836.98	55.61 PK	68.26	-12.65	-51.42	-45.57	4.92	-39.65
4	11537.51	44.66 AV	54	-9.34	-59.19	-57.96	4.92	-50.6
5	#17671.7	55.91 PK	68.26	-12.35	-50.95	-45.32	4.92	-39.35
6	18989.4	46.55 AV	54	-7.45	-57.25	-56.1	4.92	-48.71
7	#24547.5	57.84 PK	68.26	-10.42	-43.04	-50.58	4.92	-37.42
8	23870	49.01 AV	54	-4.99	-53.61	-54.84	4.92	-46.25
9	#34519.47	52.12 PK	68.26	-16.14	-55.23	-48.98	4.92	-43.14
10	39994.31	43 AV	54	-11	-59.96	-60.44	4.92	-52.26

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

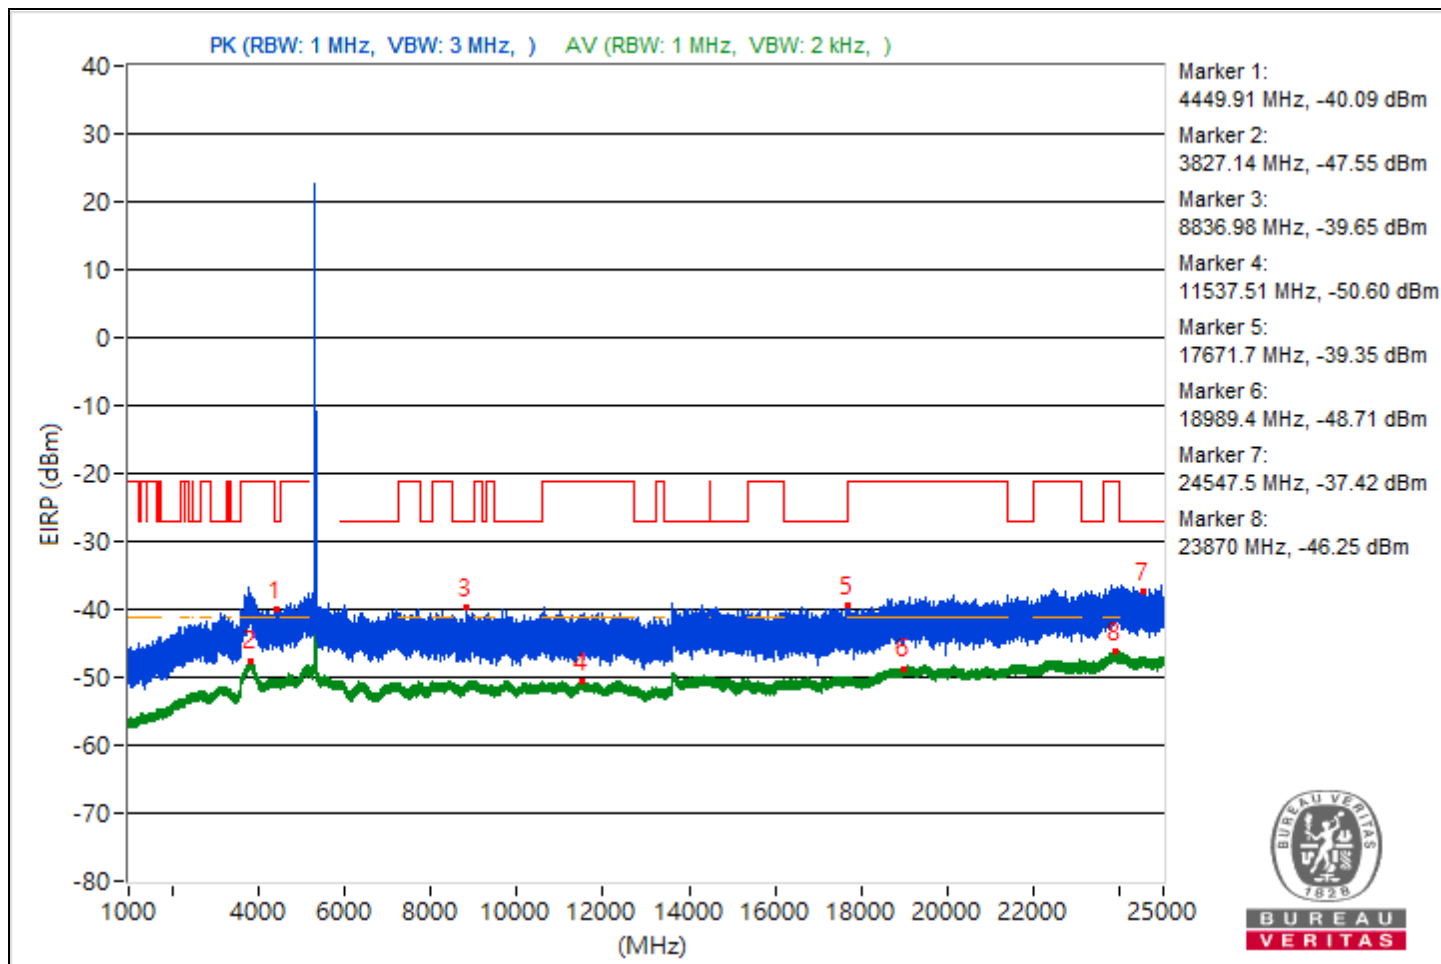

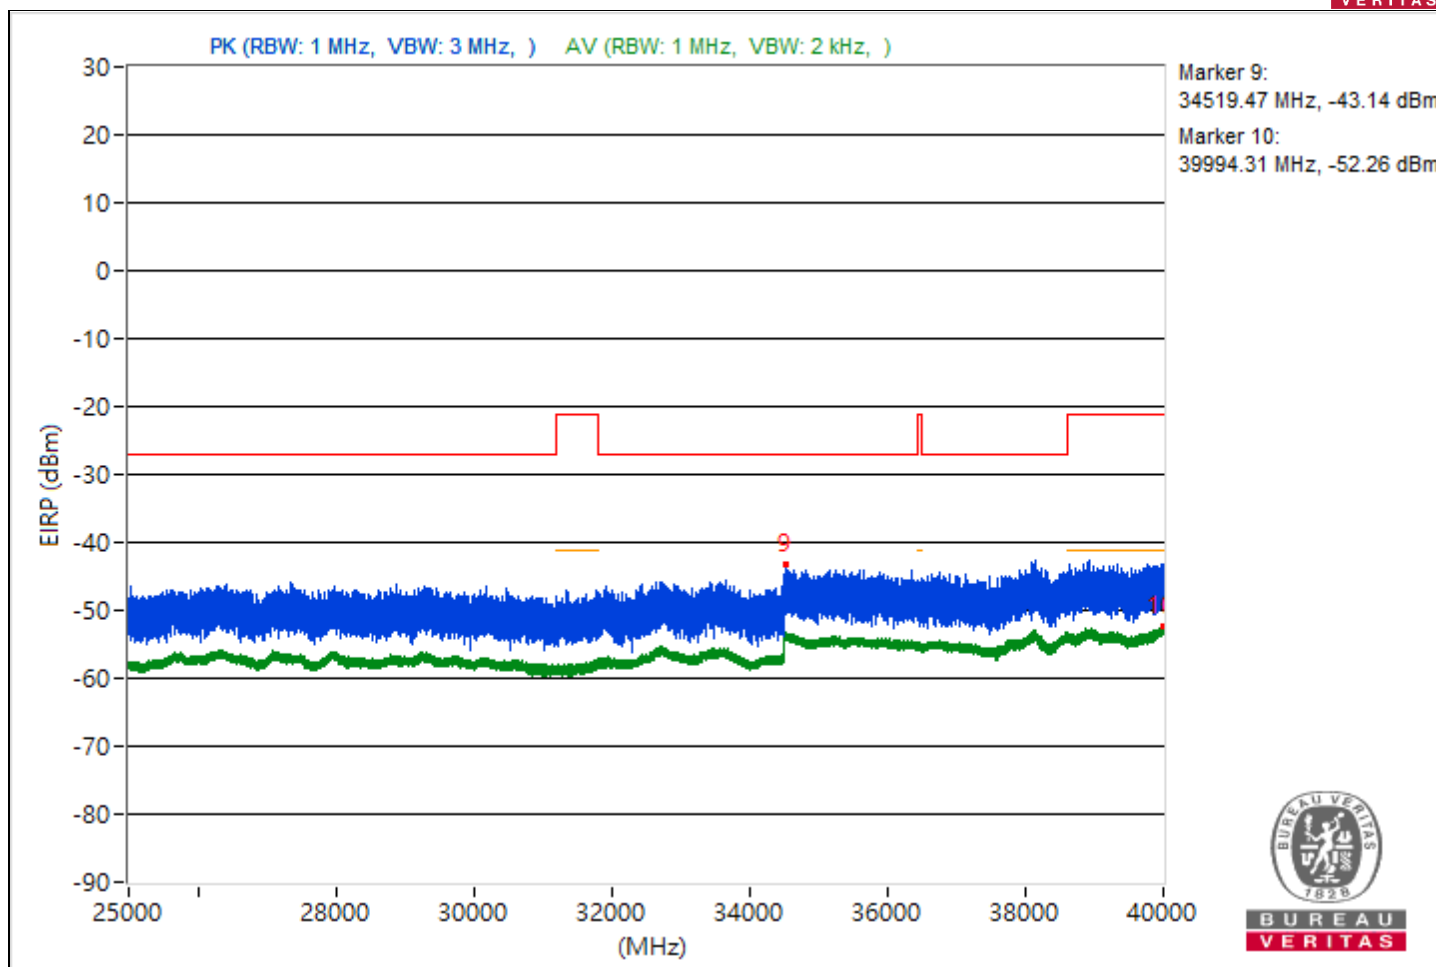





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4400.29	54.59 PK	68.26	-13.67	-50.23	-47.42	4.92	-40.67
2	3795.18	47.63 AV	54	-6.37	-55.95	-55.21	4.92	-47.63
3	#5939.2	55.25 PK	68.26	-13.01	-46.93	-49.27	4.92	-40.01
4	11512.09	44.71 AV	54	-9.29	-59.16	-57.89	4.92	-50.55
5	#15288	55.74 PK	68.26	-12.52	-45.24	-52.21	4.92	-39.52
6	18792.3	46.53 AV	54	-7.47	-57.21	-56.18	4.92	-48.73
7	#24594.4	58.1 PK	68.26	-10.16	-48.35	-43.24	4.92	-37.16
8	23920.6	48.97 AV	54	-5.03	-53.7	-54.82	4.92	-46.29
9	#38097.96	51.92 PK	68.26	-16.34	-49.06	-56.04	4.92	-43.34
10	39996.71	42.78 AV	54	-11.22	-59.91	-60.97	4.92	-52.48

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

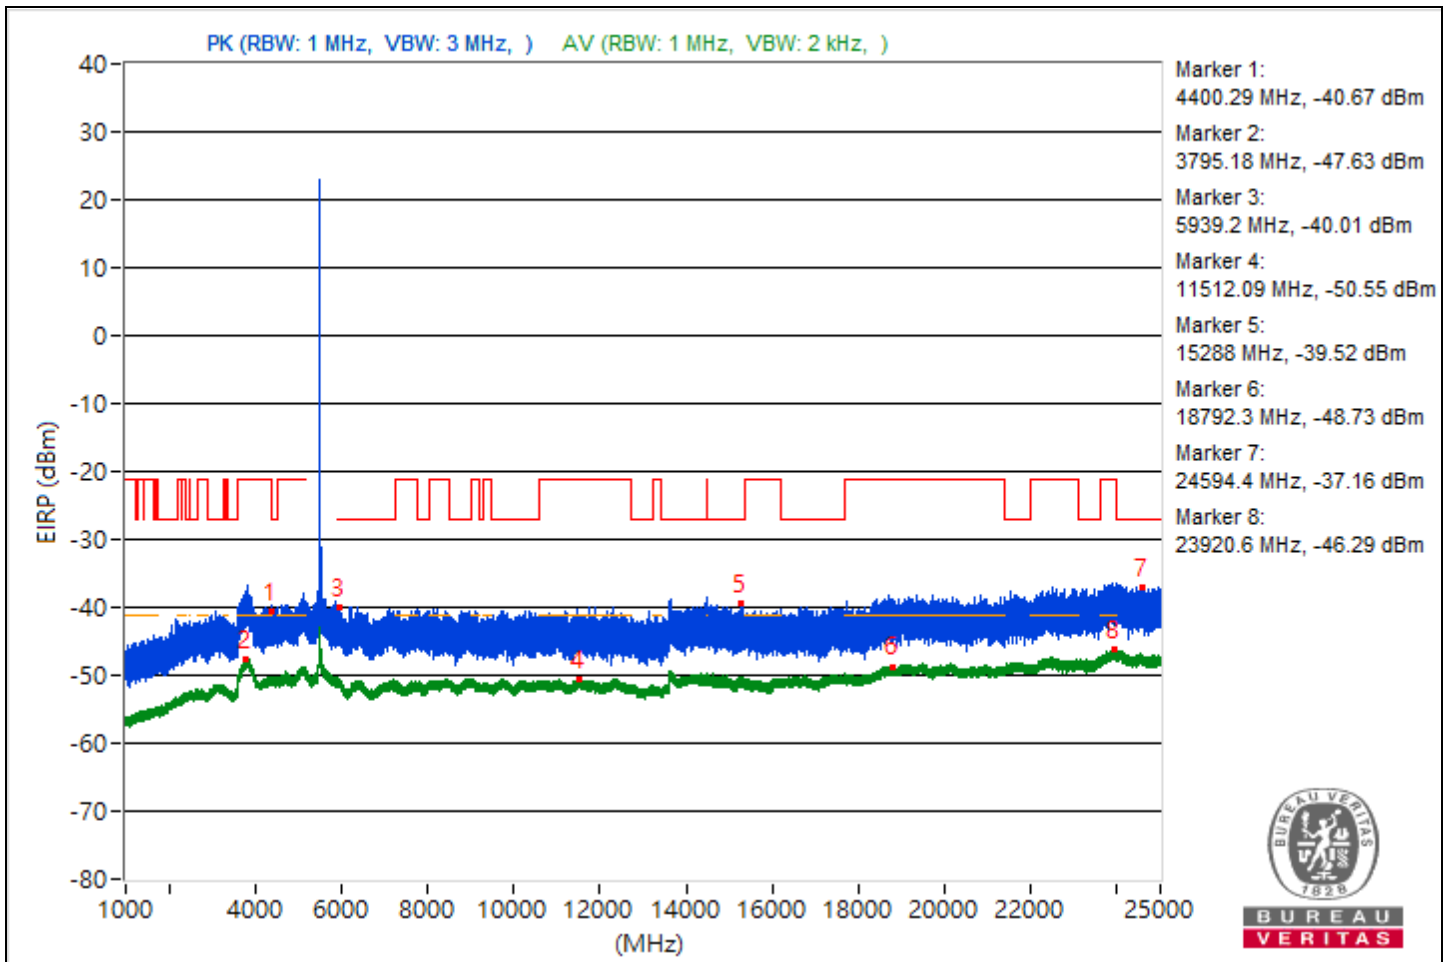

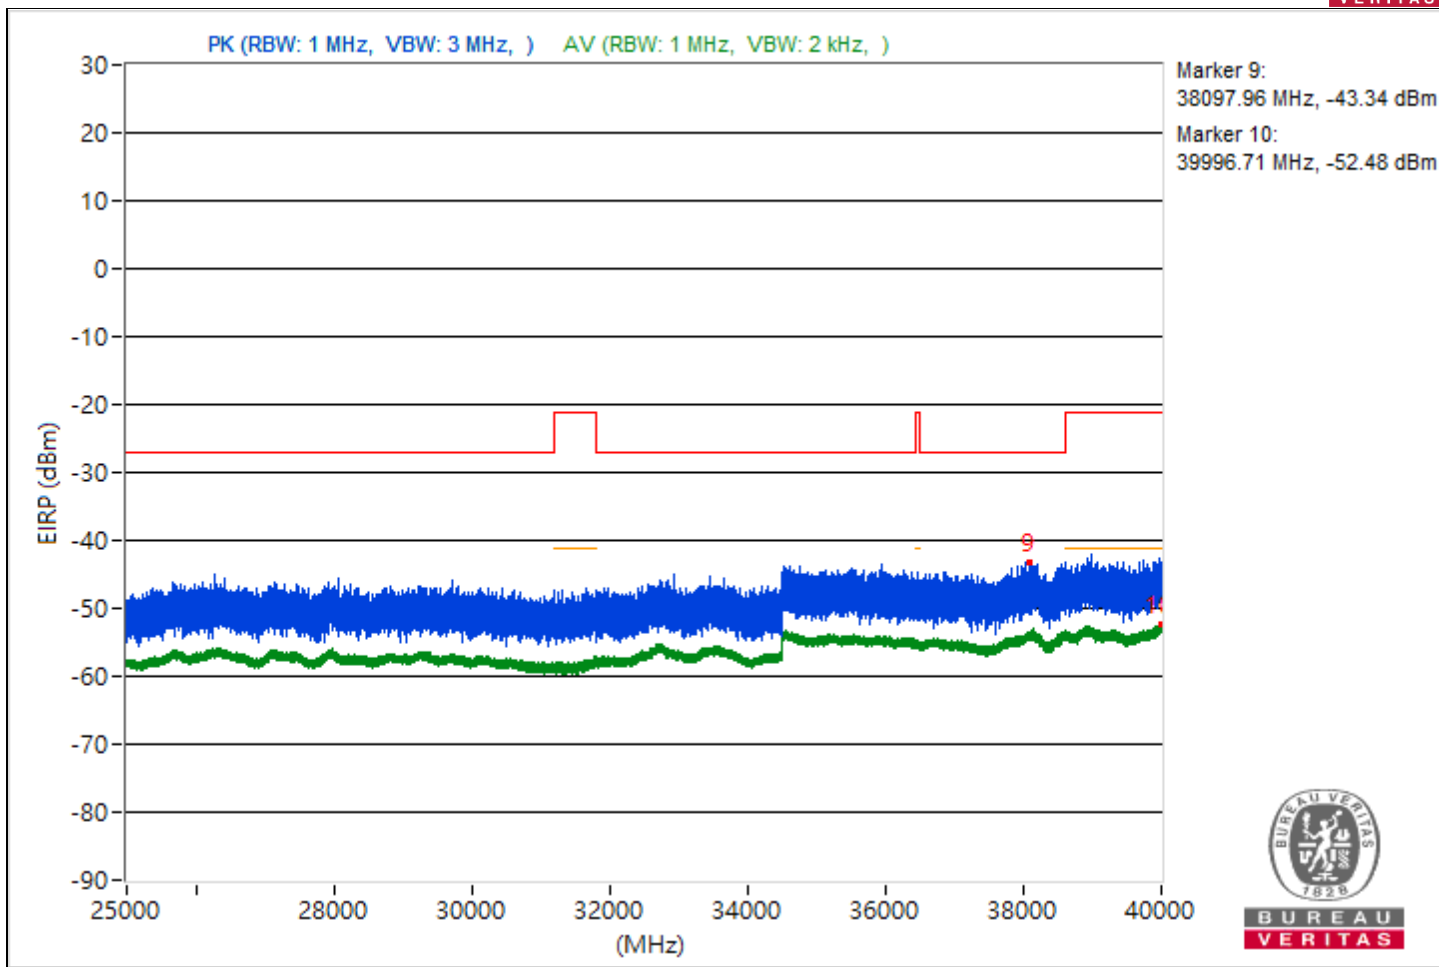



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4434.12	55.07 PK	68.26	-13.19	-45.97	-52.58	4.92	-40.19
2	3813.77	47.52 AV	54	-6.48	-56.06	-55.31	4.92	-47.74
3	#9789.69	54.69 PK	68.26	-13.57	-51.18	-46.85	4.92	-40.57
4	9000.09	44.69 AV	54	-9.31	-59.03	-58.03	4.92	-50.57
5	#13681.69	55.65 PK	68.26	-12.61	-49.59	-46.16	4.92	-39.61
6	18833.1	46.5 AV	54	-7.5	-57.21	-56.23	4.92	-48.76
7	#24031.2	60.28 PK	68.26	-7.98	-41.63	-44.73	4.92	-34.98
8	23823.5	48.67 AV	54	-5.33	-55.18	-53.94	4.92	-46.59
9	#38072.53	52.1 PK	68.26	-16.16	-49.11	-54.84	4.92	-43.16
10	39969.42	42.73 AV	54	-11.27	-60.86	-60.08	4.92	-52.53

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

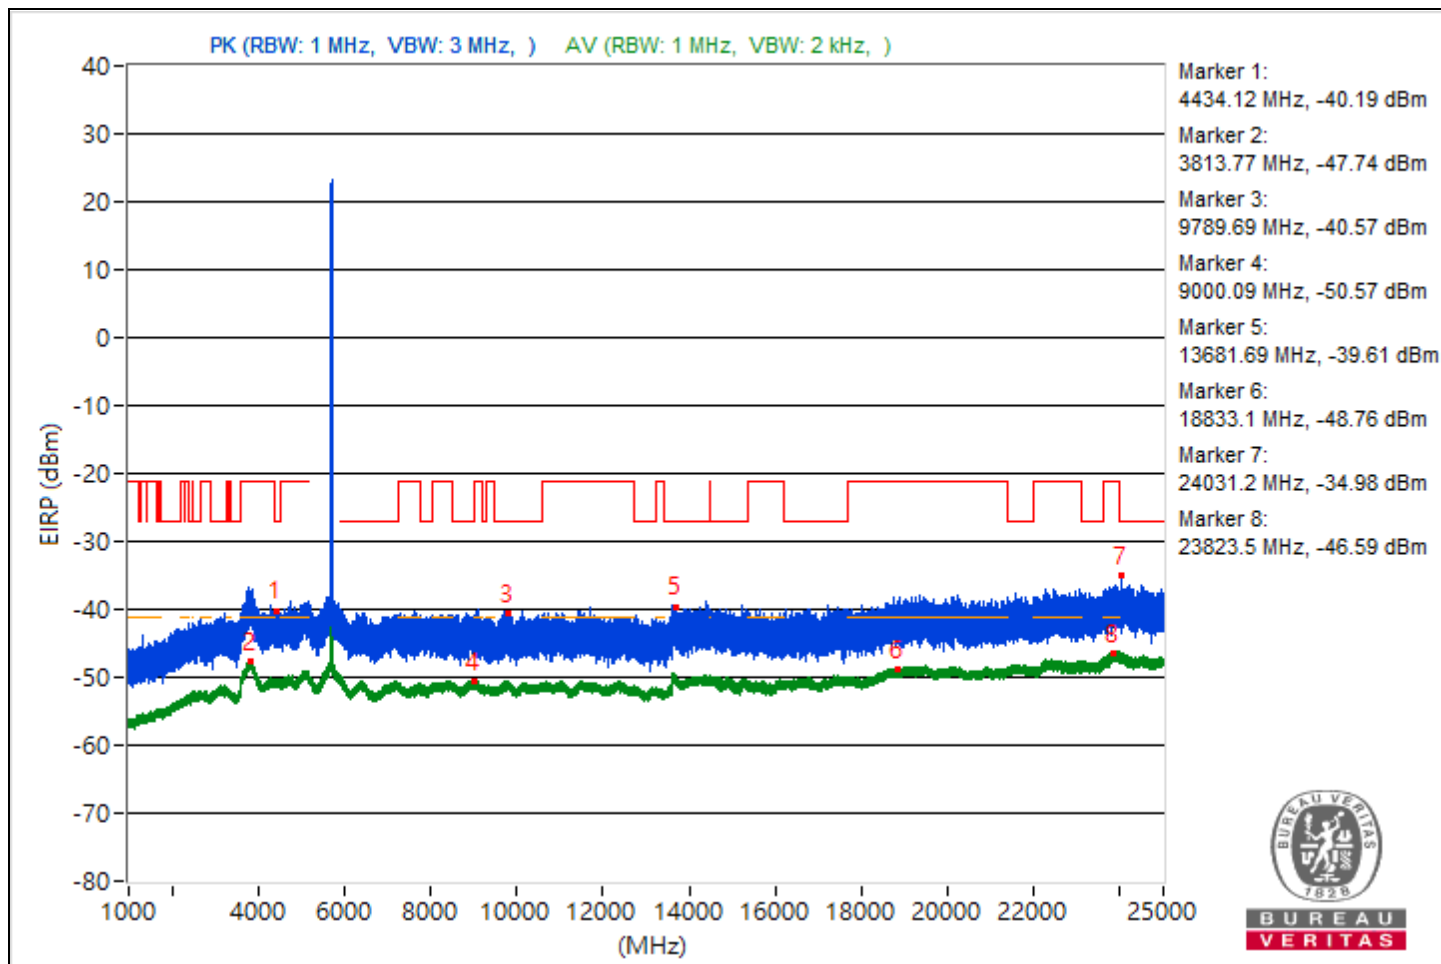

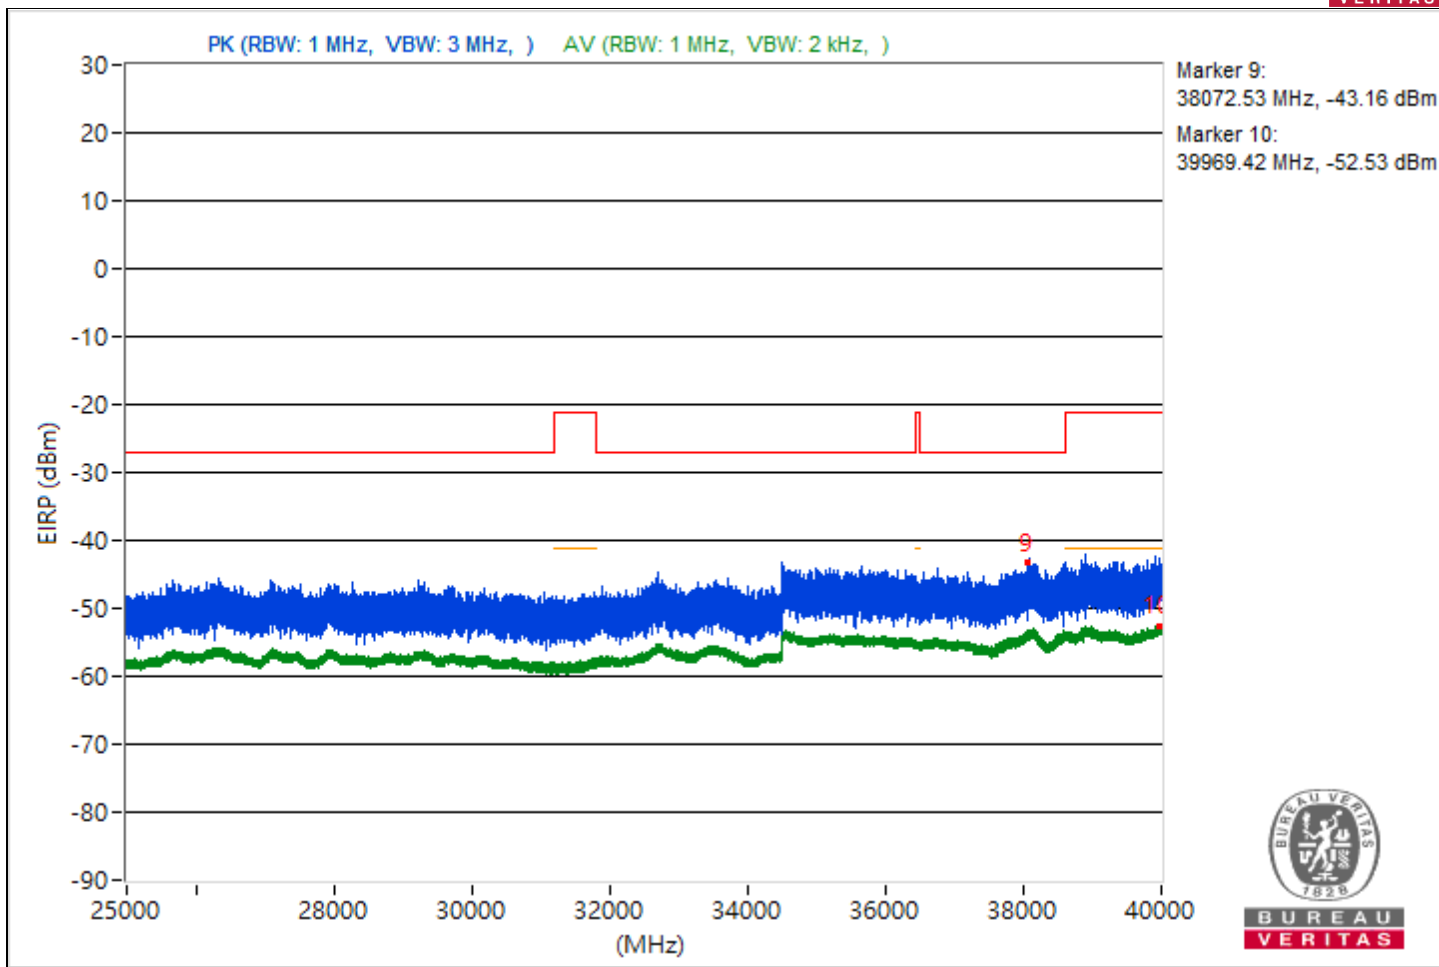



RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4428.52	55.18 PK	68.26	-13.08	-50.49	-46.45	4.92	-40.08
2	3815.94	47.36 AV	54	-6.64	-56.67	-55.13	4.92	-47.9
3	#6394.51	55.08 PK	68.26	-13.18	-51.48	-46.24	4.92	-40.18
4	11574.93	44.27 AV	54	-9.73	-59.58	-58.35	4.92	-50.99
5	#14159.56	55.16 PK	68.26	-13.1	-46.18	-51.31	4.92	-40.1
6	18976.9	46.36 AV	54	-7.64	-56.6	-57.07	4.92	-48.9
7	#24404.6	58.8 PK	68.26	-9.46	-42.86	-46.79	4.92	-36.46
8	23842.7	48.74 AV	54	-5.26	-54.91	-54.04	4.92	-46.52
9	#38126.67	52.4 PK	68.26	-15.86	-49.78	-52.11	4.92	-42.86
10	39990.22	42.49 AV	54	-11.51	-60.06	-61.45	4.92	-52.77

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

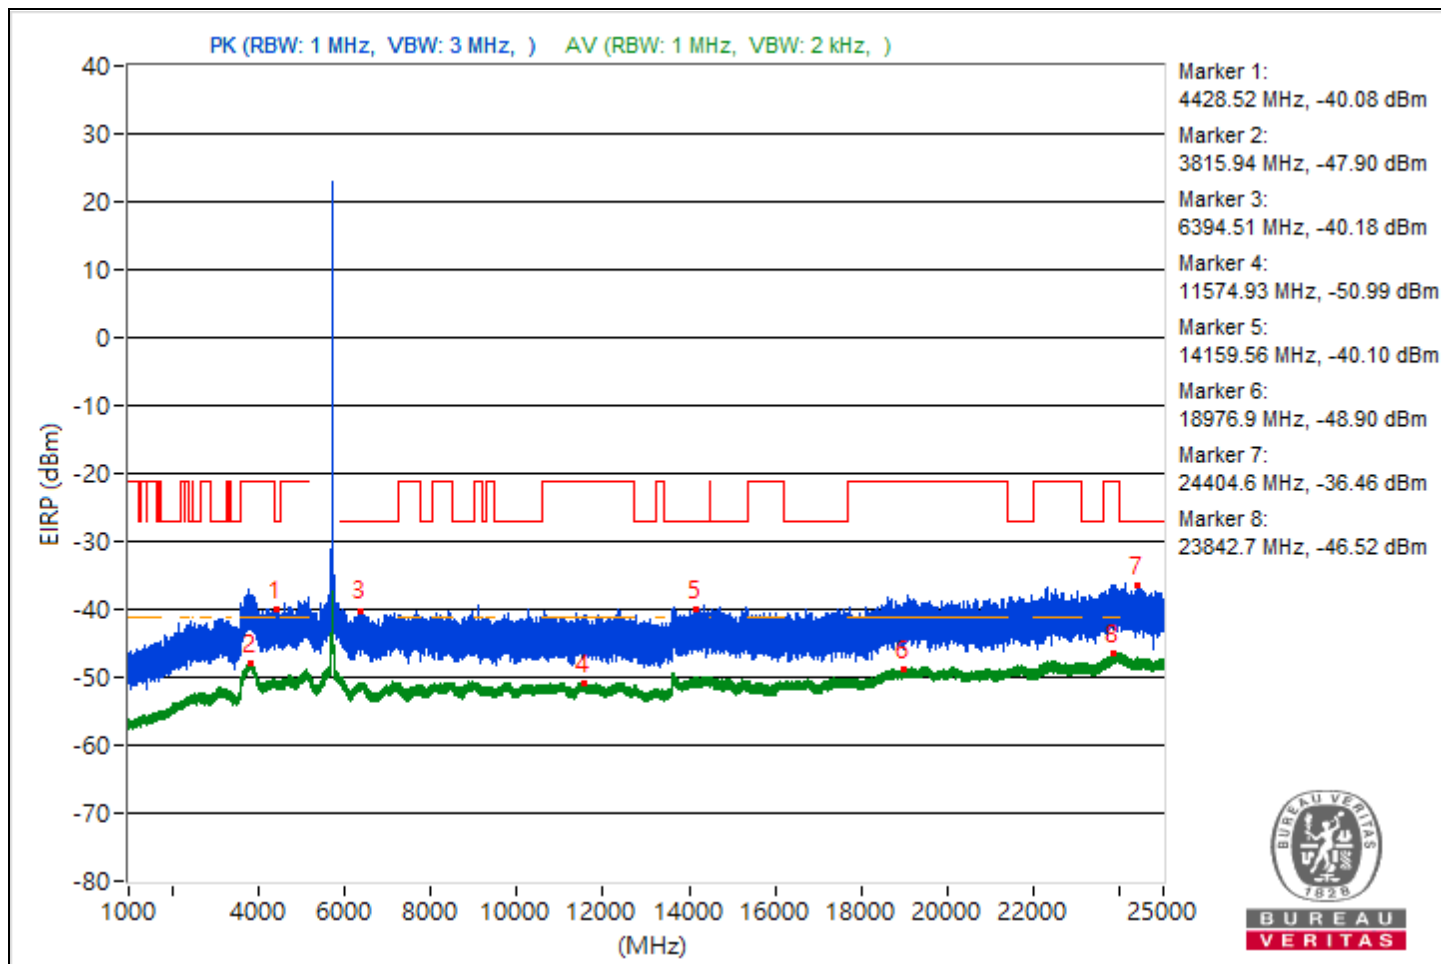

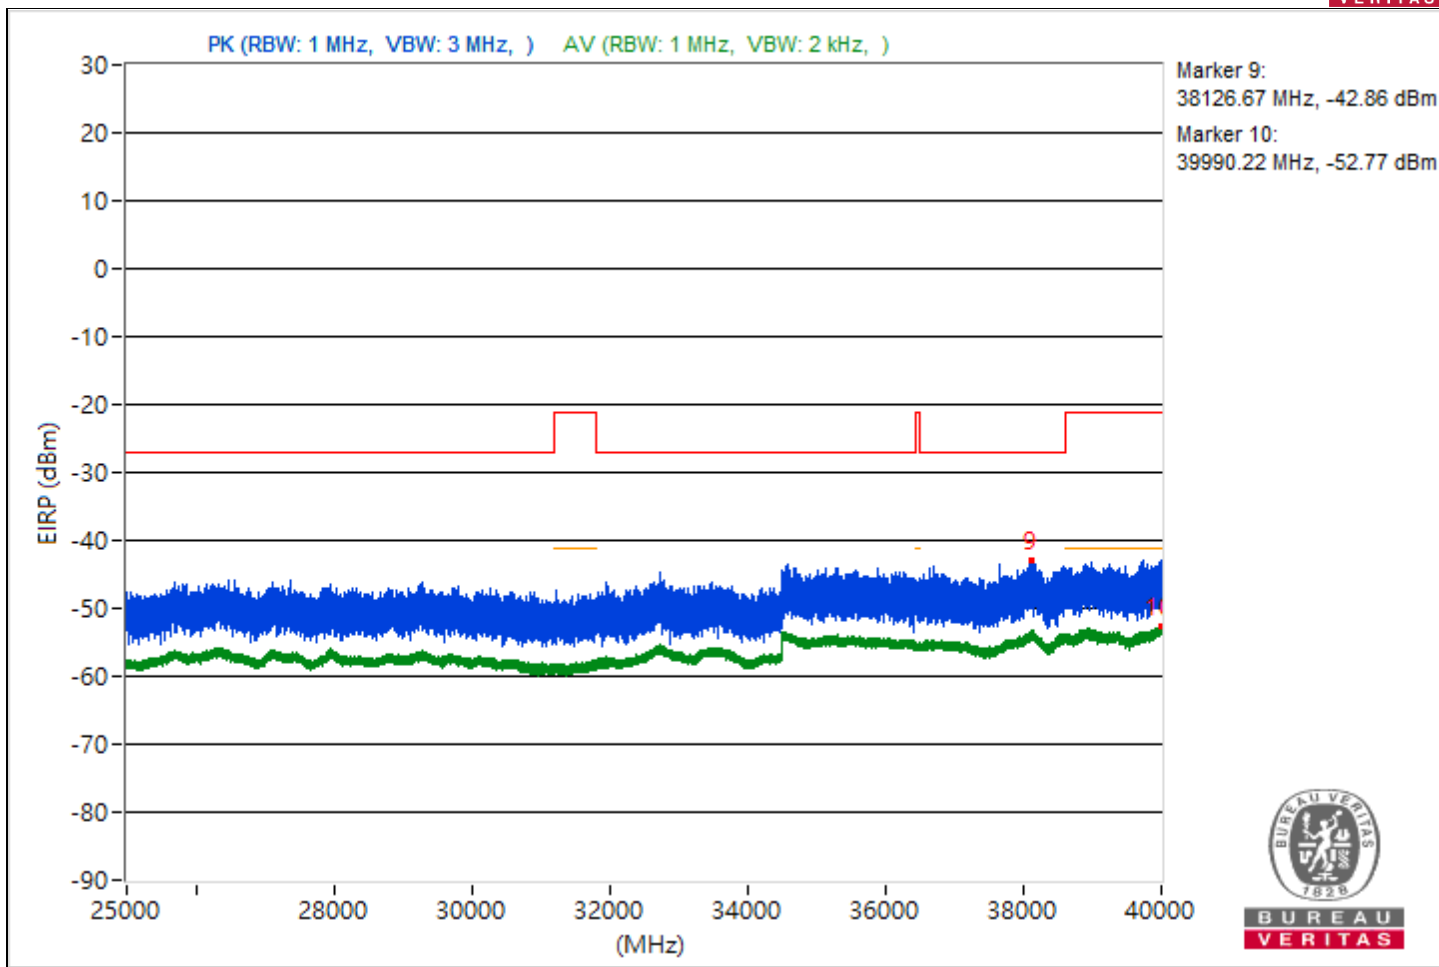



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4418.57	55.94 PK	68.26	-12.32	-46.52	-48.13	4.92	-39.32
2	3820.77	47.48 AV	54	-6.52	-55.17	-56.33	4.92	-47.78
3	#8524.36	55.15 PK	68.26	-13.11	-46.48	-50.49	4.92	-40.11
4	11510.76	44.59 AV	54	-9.41	-58.23	-59	4.92	-50.67
5	#17251.5	55.3 PK	68.26	-12.96	-45.82	-51.95	4.92	-39.96
6	18975.5	46.61 AV	54	-7.39	-57.06	-56.14	4.92	-48.65
7	#24780	59.08 PK	68.26	-9.18	-41.88	-48.95	4.92	-36.18
8	23868	49.12 AV	54	-4.88	-53.73	-54.44	4.92	-46.14
9	#35017.24	51.77 PK	68.26	-16.49	-49.66	-54.44	4.92	-43.49
10	39979.38	42.9 AV	54	-11.1	-59.75	-60.91	4.92	-52.36

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

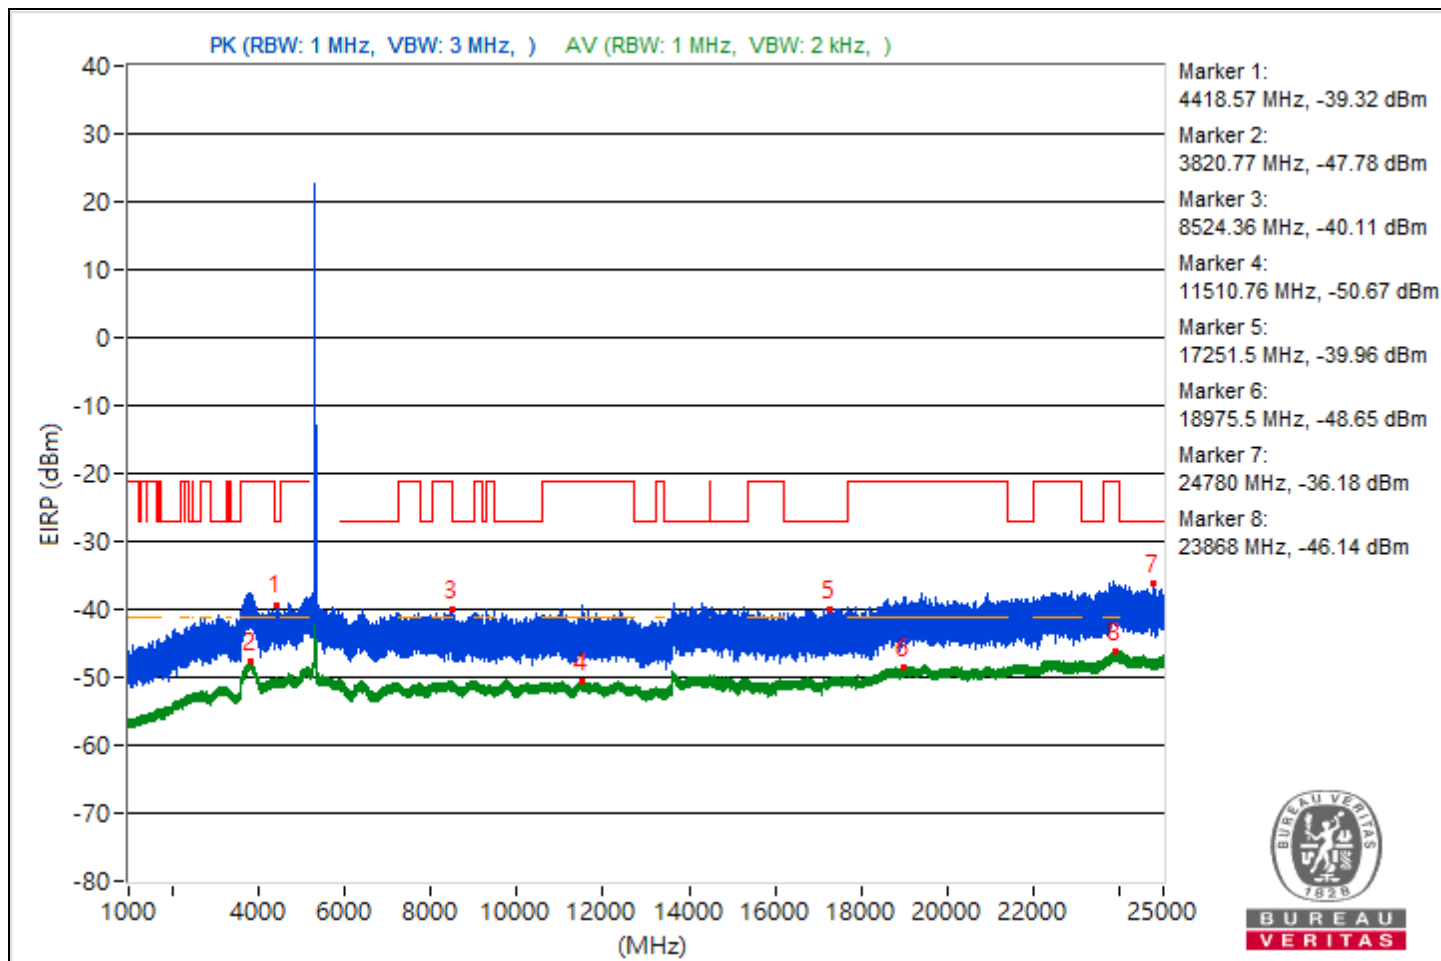

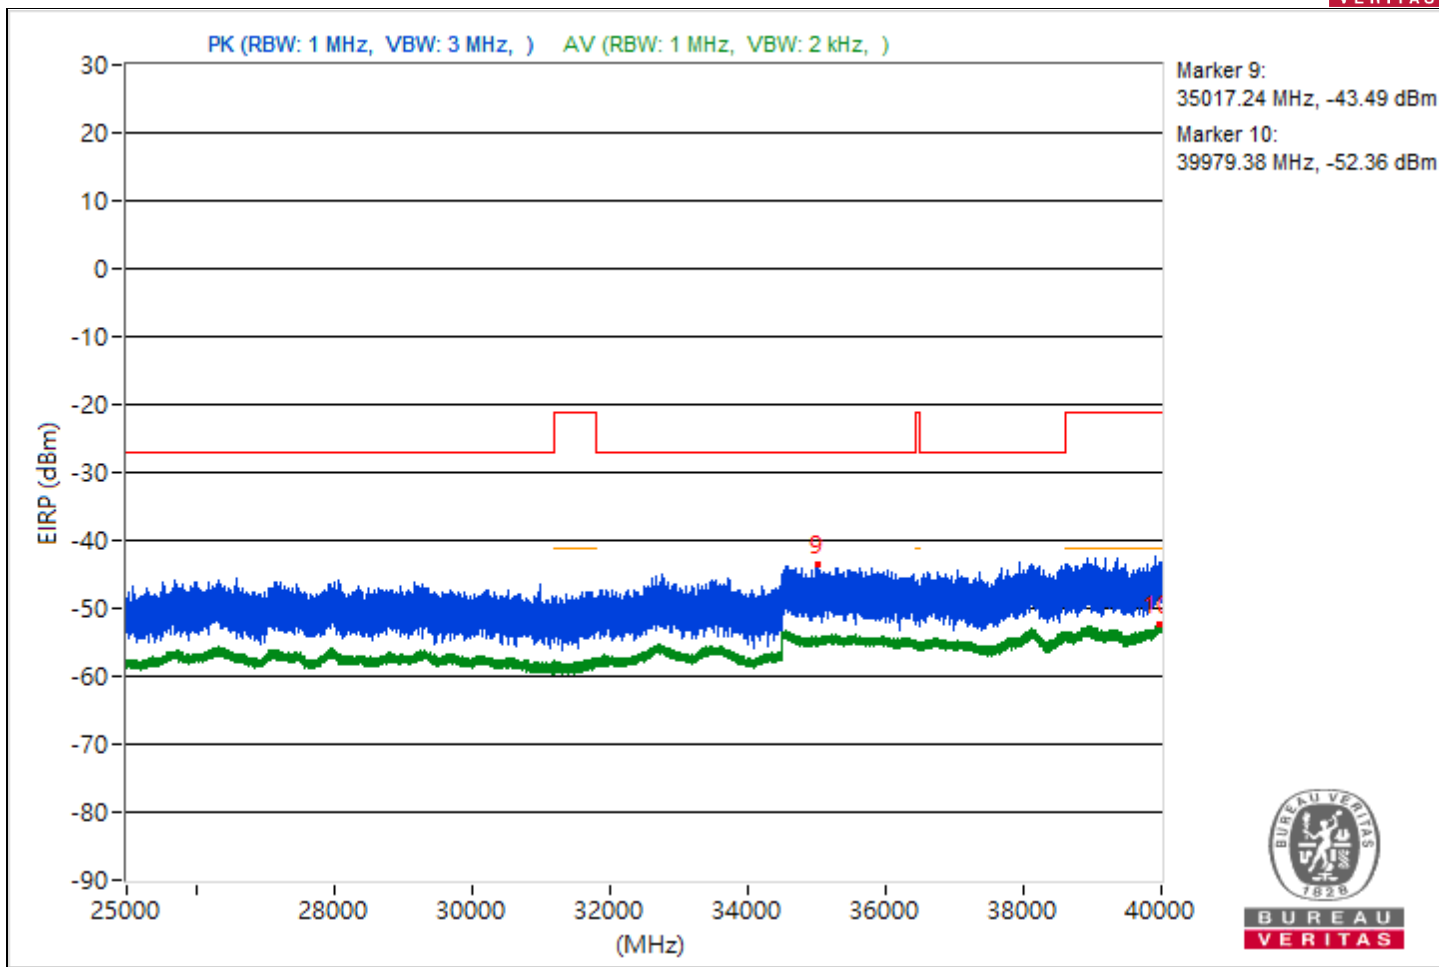



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3175.44	55.2 PK	68.26	-13.06	-46.45	-50.39	4.92	-40.06
2	3829.94	47.31 AV	54	-6.69	-55.3	-56.55	4.92	-47.95
3	#6357.64	55.75 PK	68.26	-12.51	-51.1	-45.49	4.92	-39.51
4	8394.13	44.65 AV	54	-9.35	-58.07	-59.07	4.92	-50.61
5	#15325.96	56.17 PK	68.26	-12.09	-49.42	-45.48	4.92	-39.09
6	18954.3	46.47 AV	54	-7.53	-57.28	-56.23	4.92	-48.79
7	#24051	59.37 PK	68.26	-8.89	-45.77	-42.48	4.92	-35.89
8	23918.8	49.09 AV	54	-4.91	-53.44	-54.87	4.92	-46.17
9	#35741.69	51.7 PK	68.26	-16.56	-49.35	-55.89	4.92	-43.56
10	39987.2	42.99 AV	54	-11.01	-60.59	-59.84	4.92	-52.27

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

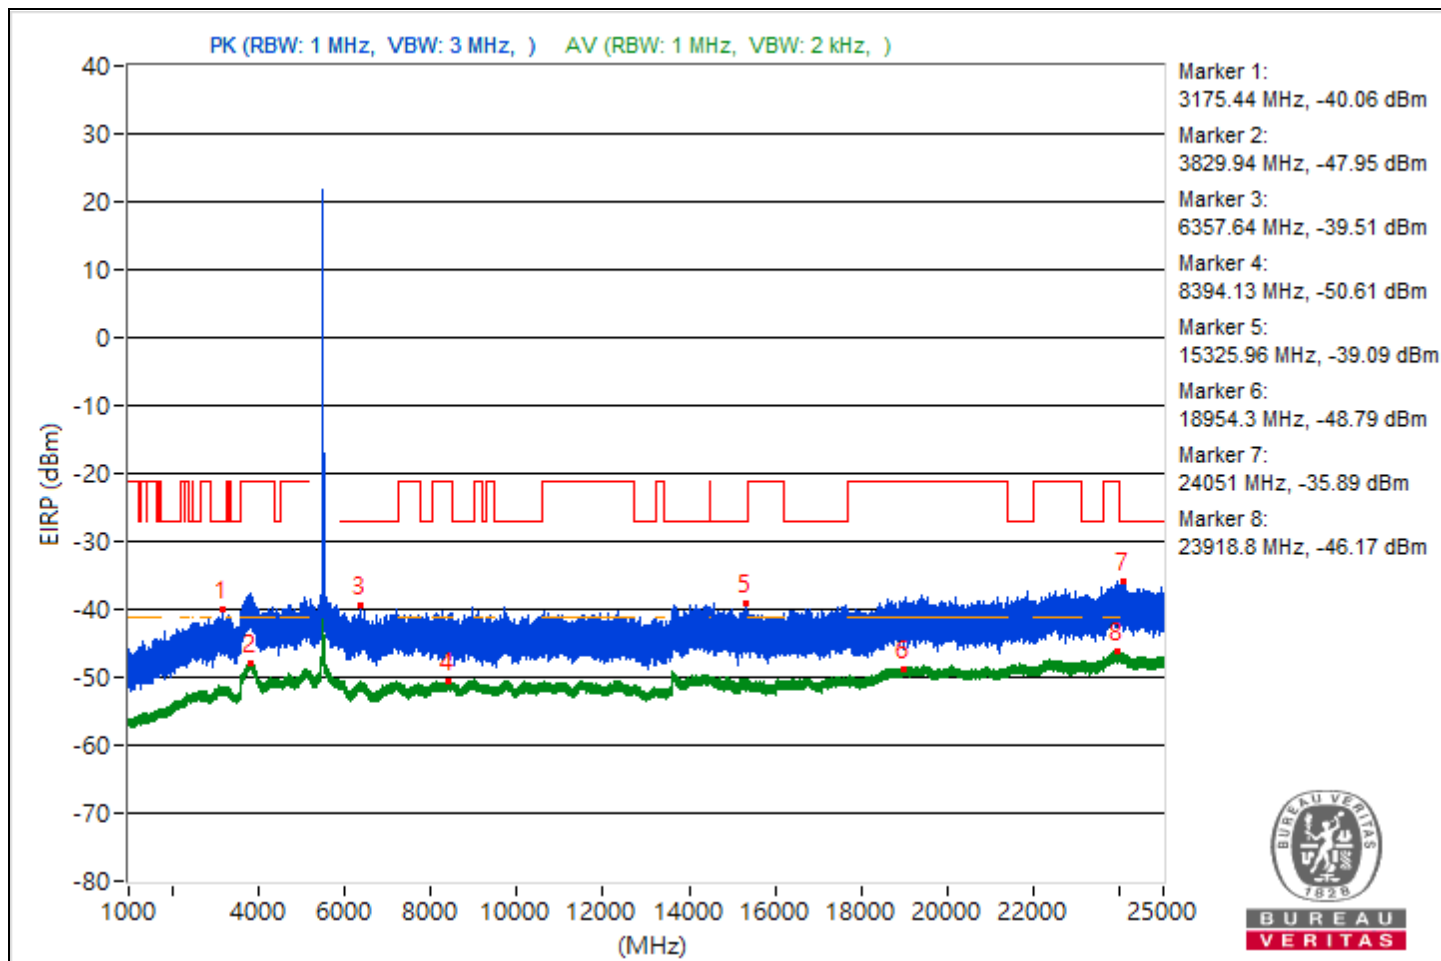

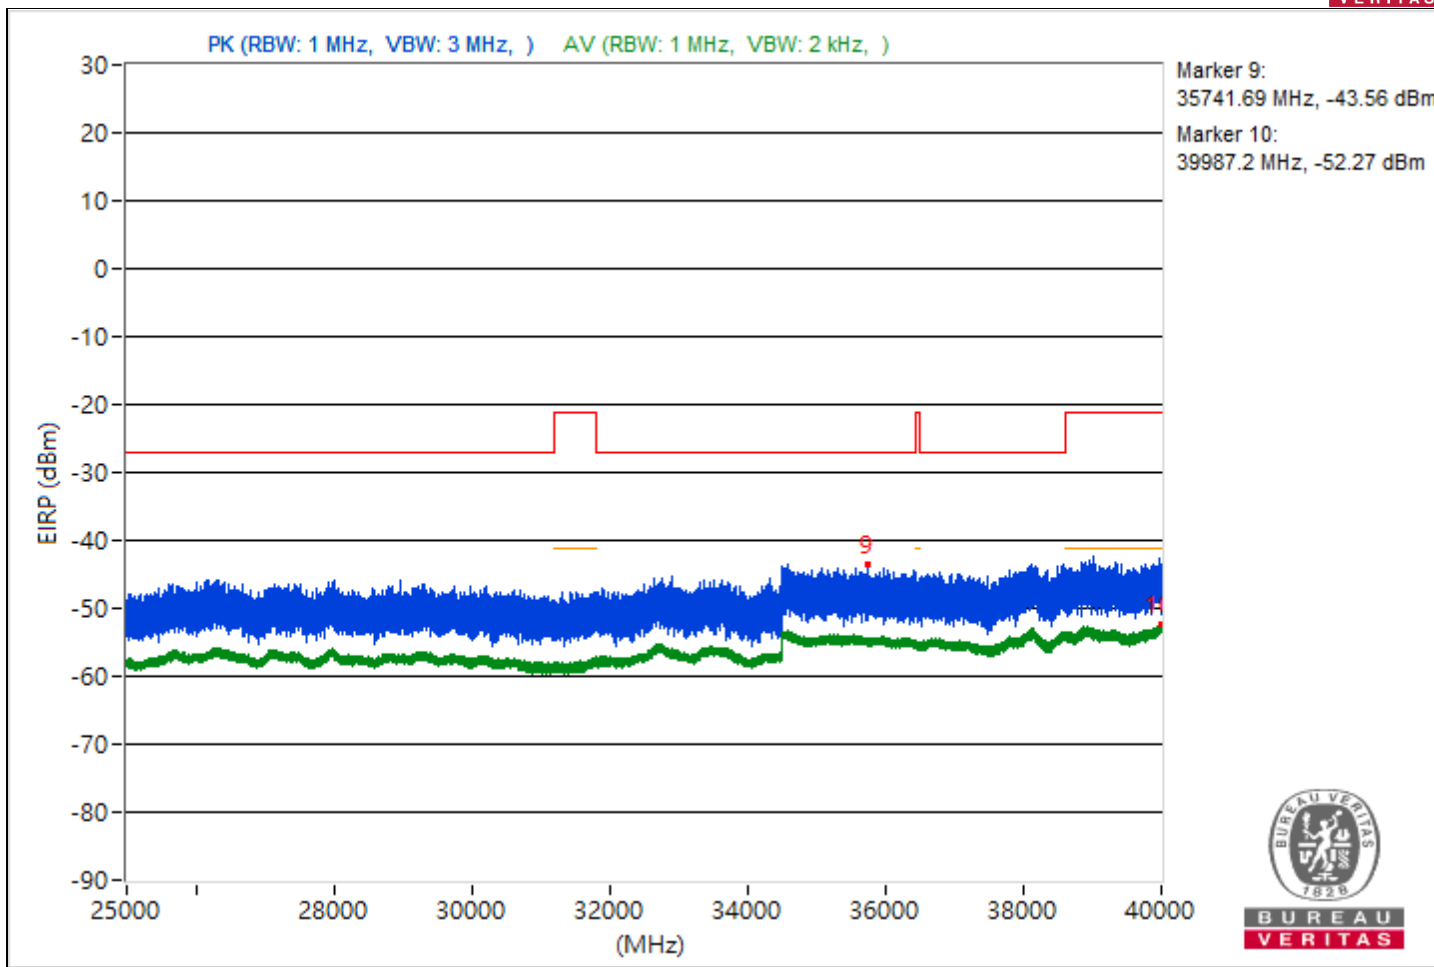



RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4465.93	54.47 PK	68.26	-13.79	-47.21	-51.07	4.92	-40.79
2	3805.06	47.56 AV	54	-6.44	-55.96	-55.32	4.92	-47.7
3	#12835.47	55.38 PK	68.26	-12.88	-46.19	-50.42	4.92	-39.88
4	11052.27	44.85 AV	54	-9.15	-58.7	-58.01	4.92	-50.41
5	#14939.38	56.5 PK	68.26	-11.76	-45.07	-49.31	4.92	-38.76
6	18944.7	46.44 AV	54	-7.56	-56.33	-57.21	4.92	-48.82
7	#24108.4	60.1 PK	68.26	-8.16	-46.15	-41.32	4.92	-35.16
8	23923.7	49.11 AV	54	-4.89	-54.53	-53.68	4.92	-46.15
9	#38148.53	51.43 PK	68.26	-16.83	-54.99	-49.93	4.92	-43.83
10	39980.27	43.26 AV	54	-10.74	-60.13	-59.75	4.92	-52

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

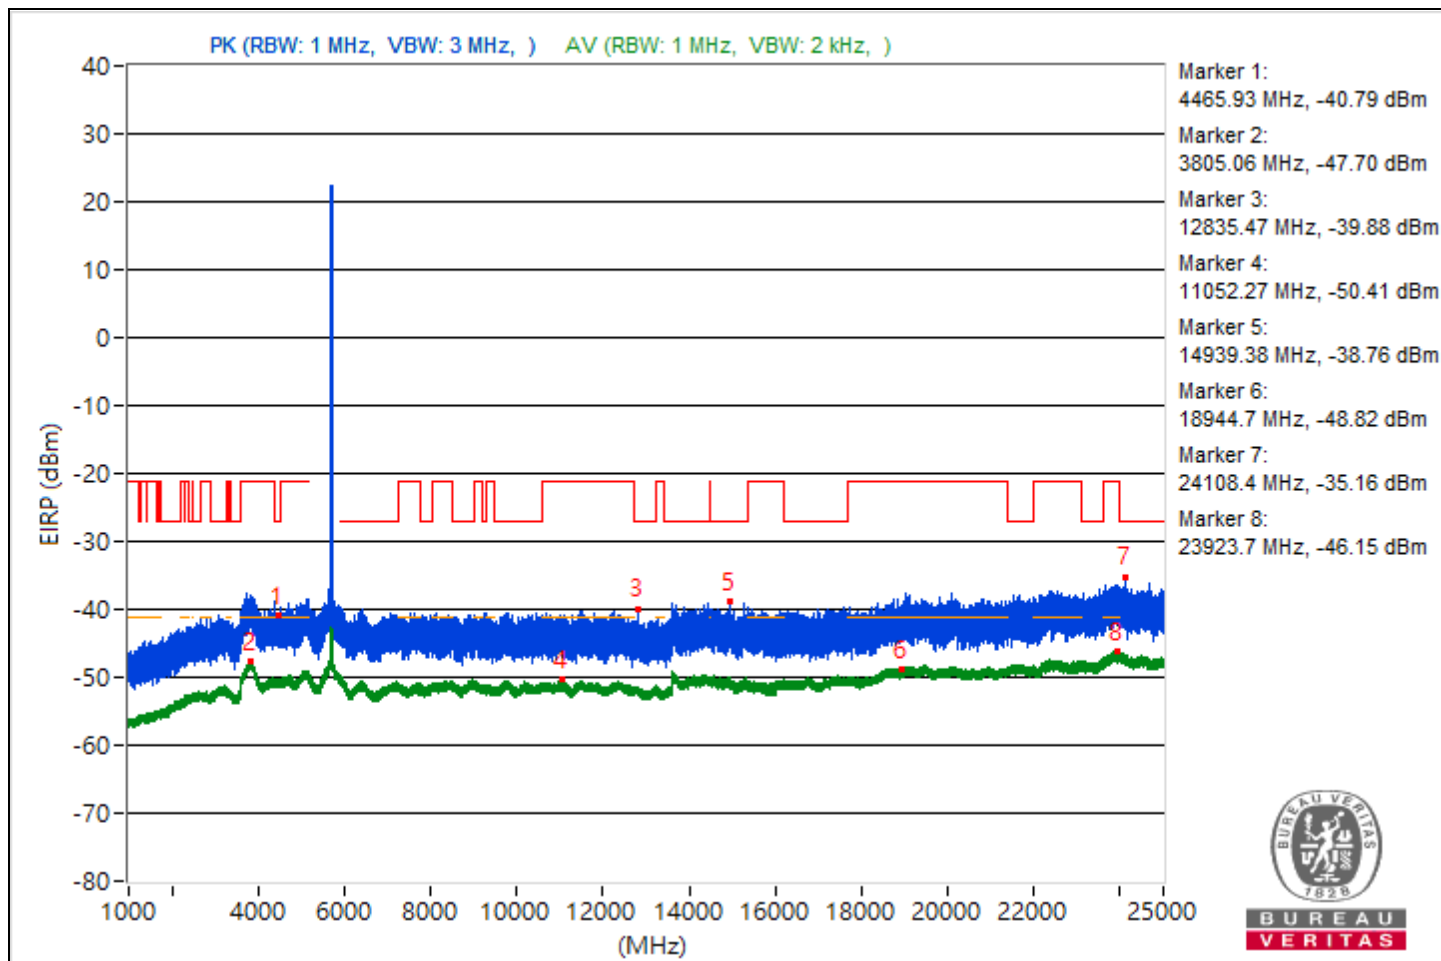

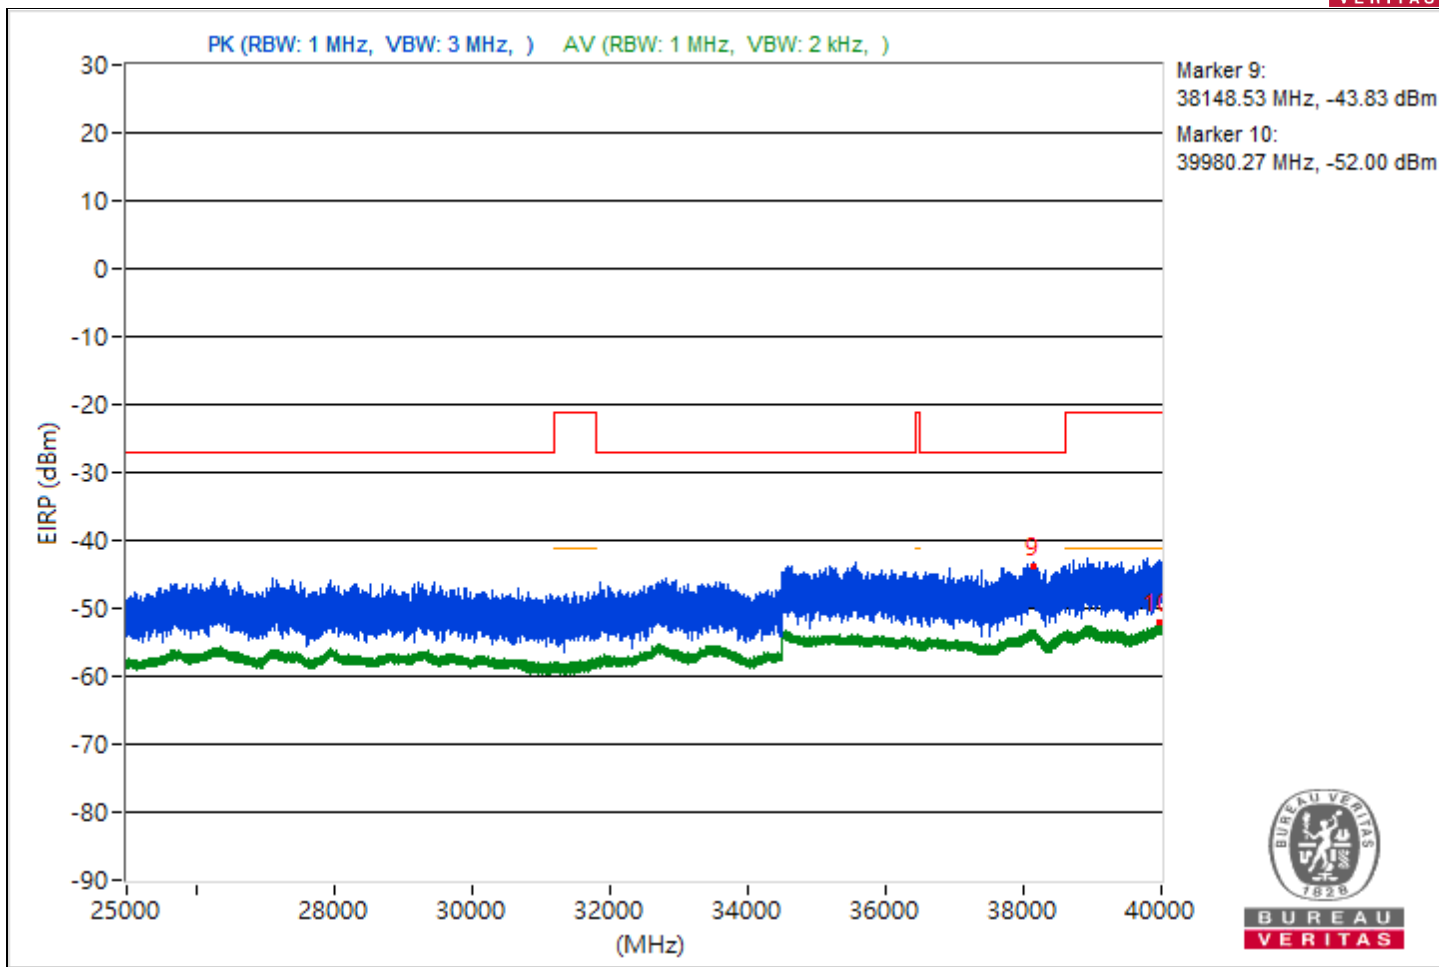





RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4476.43	54.53 PK	68.26	-13.73	-46.93	-51.56	4.92	-40.73
2	3825.67	47.69 AV	54	-6.31	-55.38	-55.63	4.92	-47.57
3	#5907.93	55.01 PK	68.26	-13.25	-46.51	-50.95	4.92	-40.25
4	8413.24	44.73 AV	54	-9.27	-58.2	-58.74	4.92	-50.53
5	#13617.07	55.76 PK	68.26	-12.5	-49.85	-45.88	4.92	-39.5
6	18590.1	46.3 AV	54	-7.7	-56.17	-57.76	4.92	-48.96
7	#24517.9	58.21 PK	68.26	-10.05	-42.48	-51.52	4.92	-37.05
8	23871.9	48.82 AV	54	-5.18	-54.76	-54.02	4.92	-46.44
9	#38186.58	51.79 PK	68.26	-16.47	-55.12	-49.42	4.92	-43.47
10	39965.69	42.75 AV	54	-11.25	-60.98	-59.96	4.92	-52.51

Notes:

- Margin value = Emission Level - Limit value
- " # ": The radiated frequency is out of the restricted band.

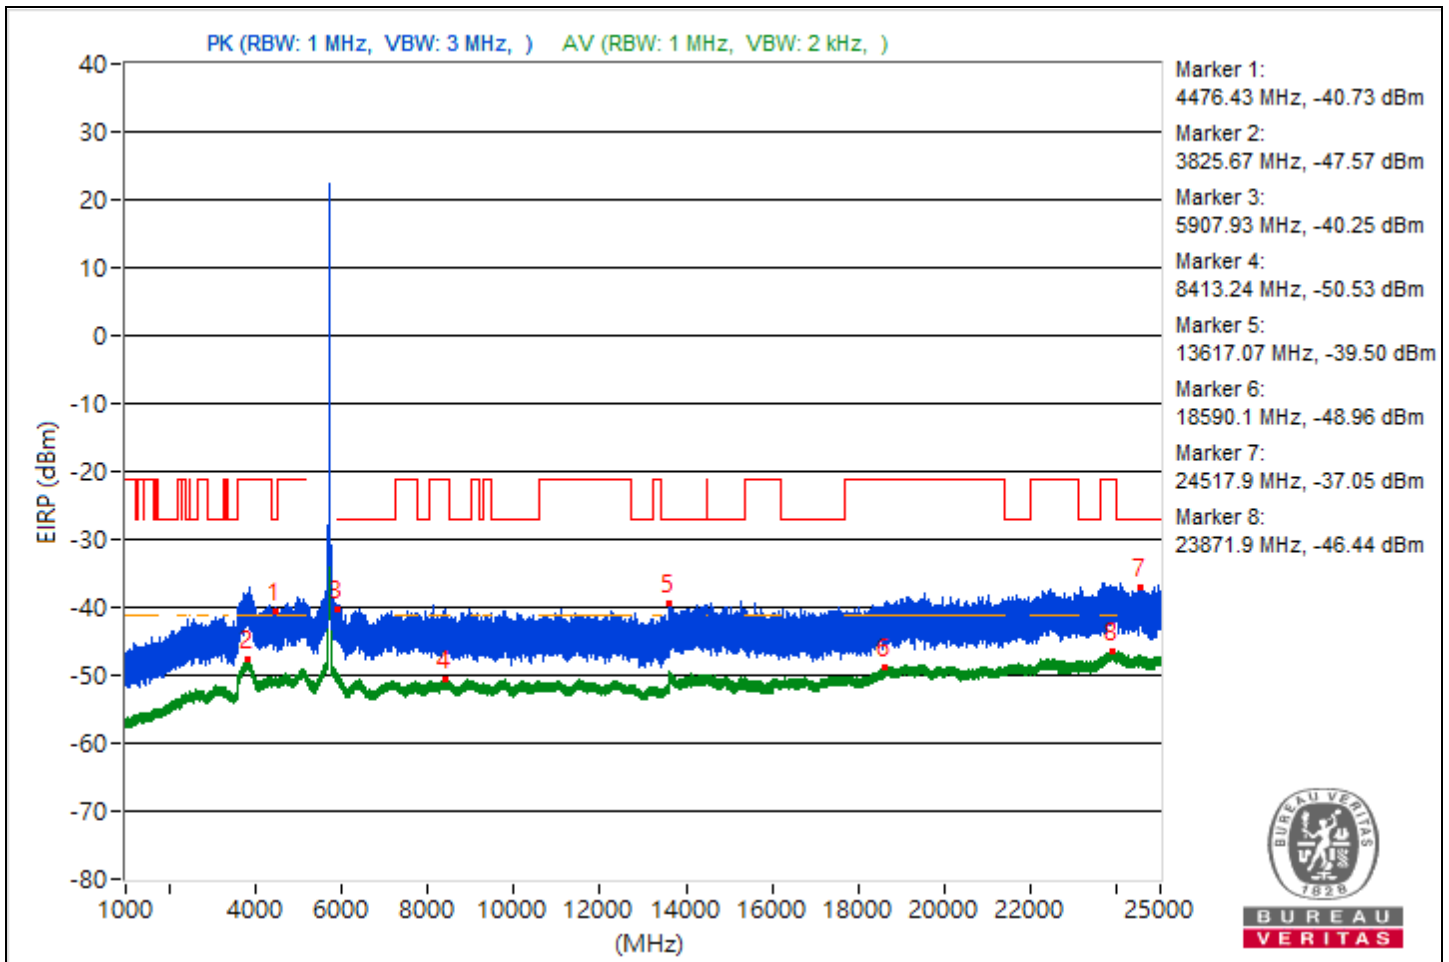

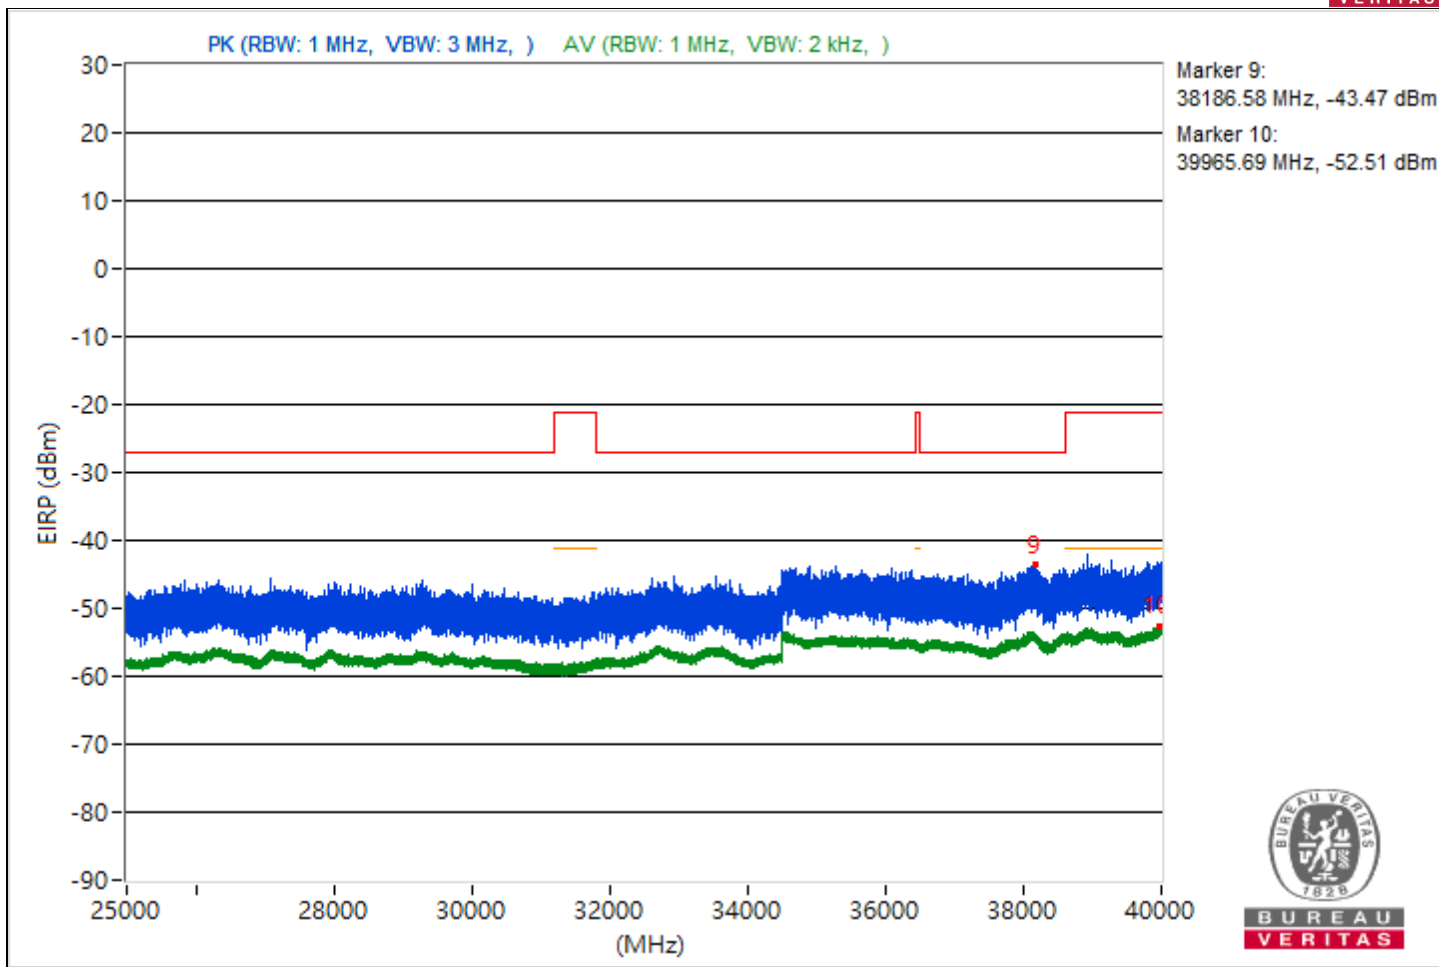





RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4440.89	54.17 PK	68.26	-14.09	-47.34	-51.79	4.92	-41.09
2	3821.23	47.39 AV	54	-6.61	-55.36	-56.3	4.92	-47.87
3	#6396.3	55.08 PK	68.26	-13.18	-50.44	-46.61	4.92	-40.18
4	9061.07	44.78 AV	54	-9.22	-58.96	-57.92	4.92	-50.48
5	#13619.29	55.81 PK	68.26	-12.45	-50.24	-45.67	4.92	-39.45
6	18990.3	46.61 AV	54	-7.39	-56.08	-57.15	4.92	-48.65
7	#24734.4	58.55 PK	68.26	-9.71	-42.84	-47.77	4.92	-36.71
8	23861.9	48.79 AV	54	-5.21	-54.97	-53.89	4.92	-46.47
9	#38572.44	51.52 PK	68.26	-16.74	-49.76	-55.14	4.92	-43.74
10	38933.69	42.6 AV	54	-11.4	-61.28	-60	4.92	-52.66

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

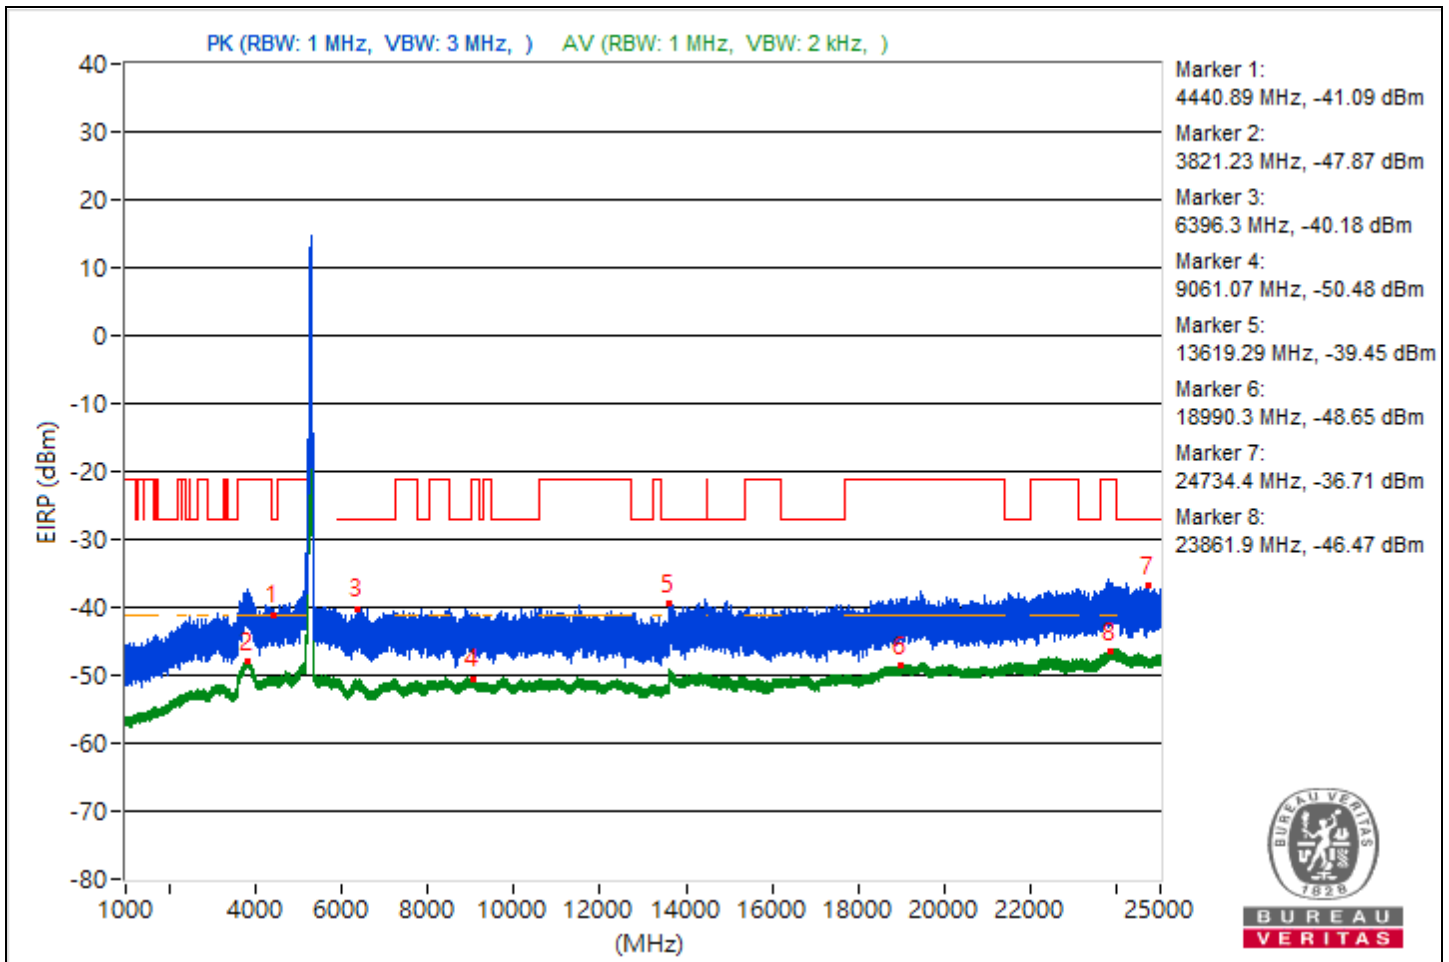

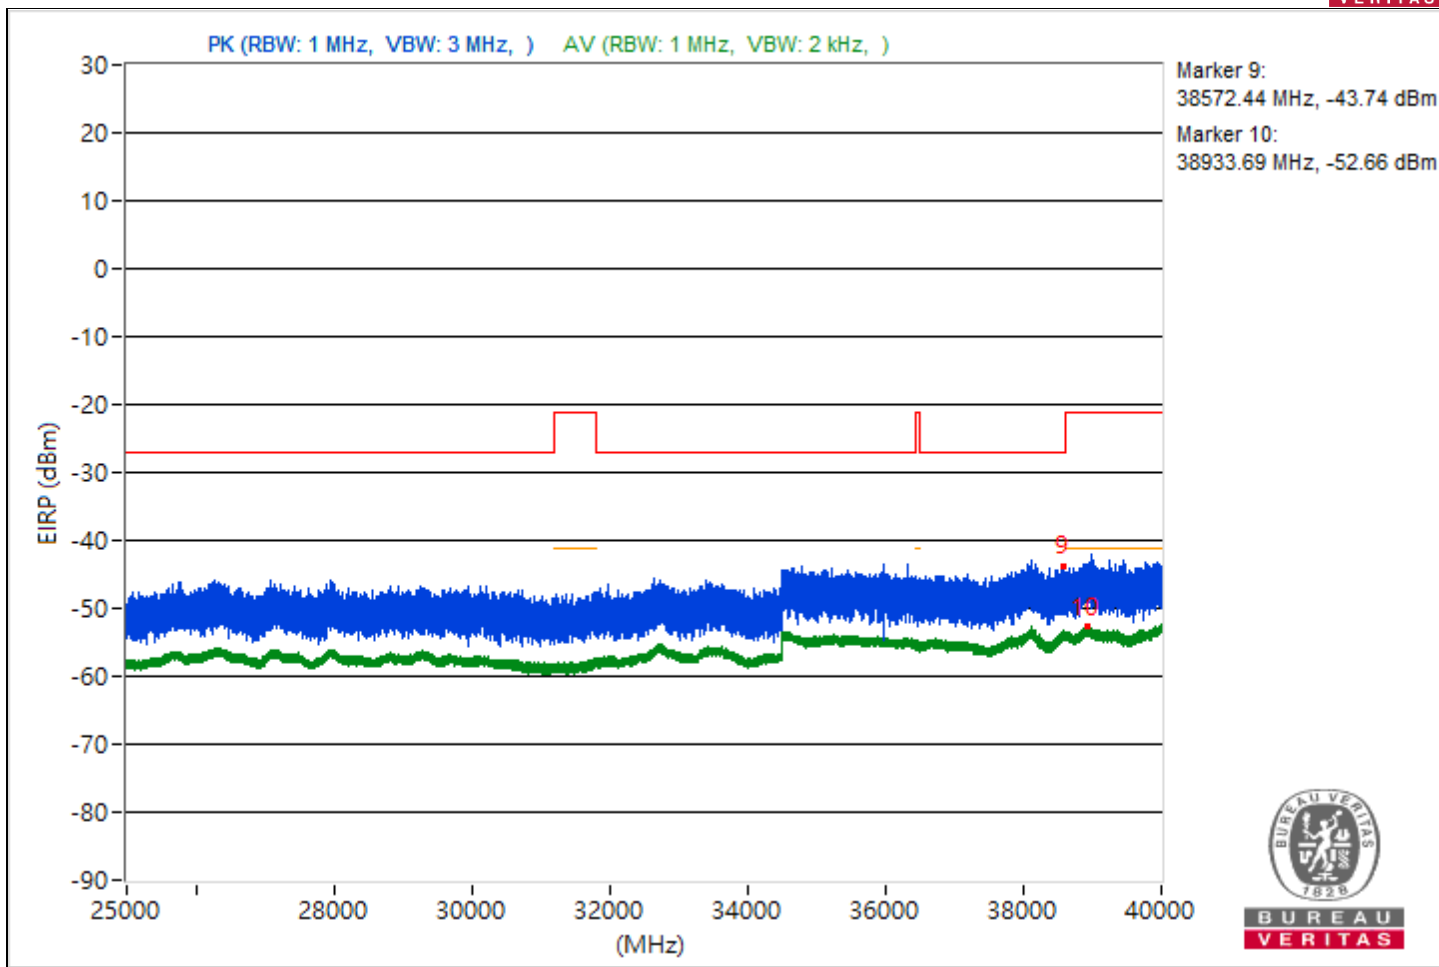



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4426.58	54.82 PK	68.26	-13.44	-46.57	-51.51	4.92	-40.44
2	3824.34	47.49 AV	54	-6.51	-56.06	-55.36	4.92	-47.77
3	#5917.19	55.16 PK	68.26	-13.1	-51.38	-46.17	4.92	-40.1
4	9006.31	44.91 AV	54	-9.09	-57.96	-58.63	4.92	-50.35
5	#14511.64	55.7 PK	68.26	-12.56	-51.87	-45.35	4.92	-39.56
6	18740	46.61 AV	54	-7.39	-56.2	-57	4.92	-48.65
7	#24190.9	59.78 PK	68.26	-8.48	-42.21	-45.07	4.92	-35.48
8	23911.7	48.9 AV	54	-5.1	-53.85	-54.8	4.92	-46.36
9	#35020.62	51.4 PK	68.26	-16.86	-55.71	-49.76	4.92	-43.86
10	39947.73	42.64 AV	54	-11.36	-60.05	-61.12	4.92	-52.62

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

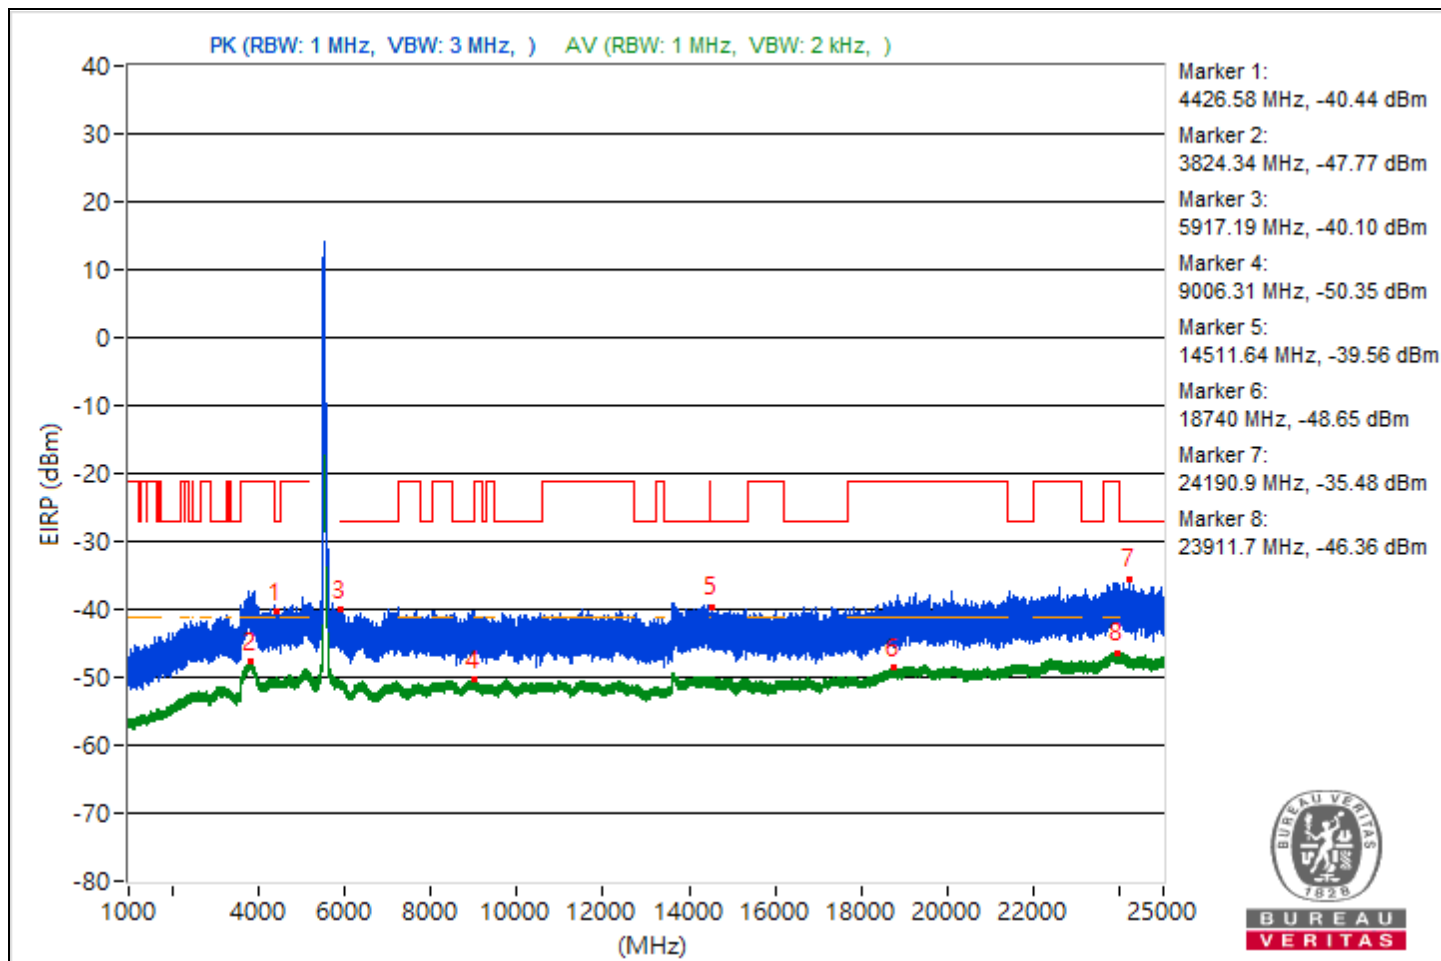

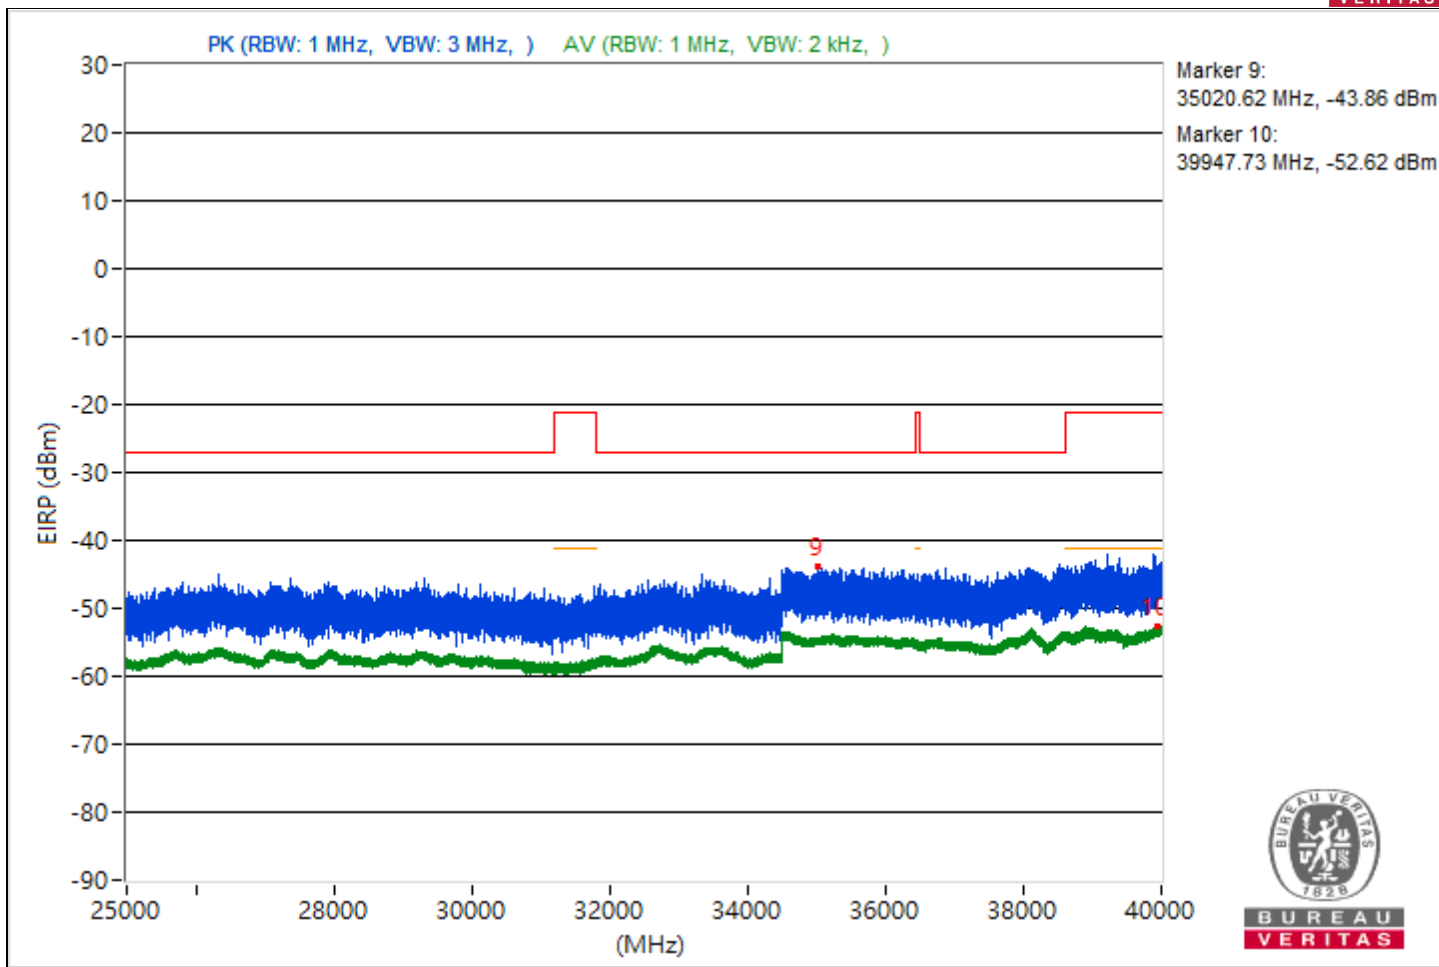



RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4431.56	55.59 PK	68.26	-12.67	-52.88	-45.29	4.92	-39.67
2	3800.39	47.6 AV	54	-6.4	-55.31	-55.89	4.92	-47.66
3	#5989.37	55.36 PK	68.26	-12.9	-45.92	-51.35	4.92	-39.9
4	12323.29	44.81 AV	54	-9.19	-58.04	-58.74	4.92	-50.45
5	#13606.4	56.03 PK	68.26	-12.23	-49.43	-45.67	4.92	-39.23
6	18735.6	46.41 AV	54	-7.59	-56.32	-57.29	4.92	-48.85
7	#24042.7	58.94 PK	68.26	-9.32	-42.14	-48.5	4.92	-36.32
8	23915	49.14 AV	54	-4.86	-54.2	-53.9	4.92	-46.12
9	#36091.91	51.43 PK	68.26	-16.83	-49.22	-58.62	4.92	-43.83
10	39995.02	42.78 AV	54	-11.22	-60.76	-60.08	4.92	-52.48

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

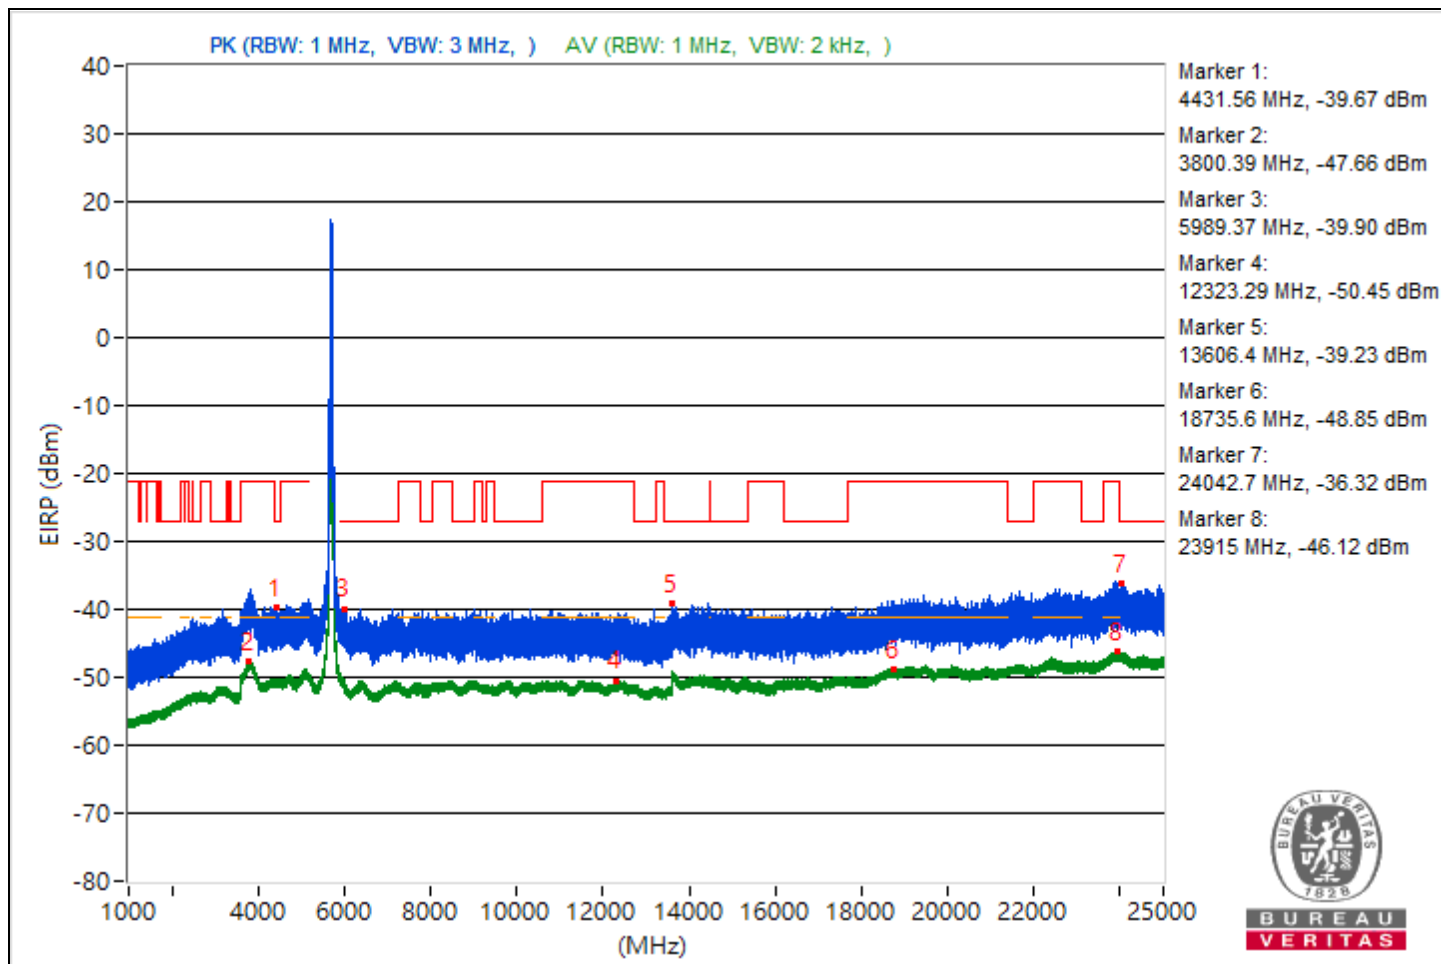

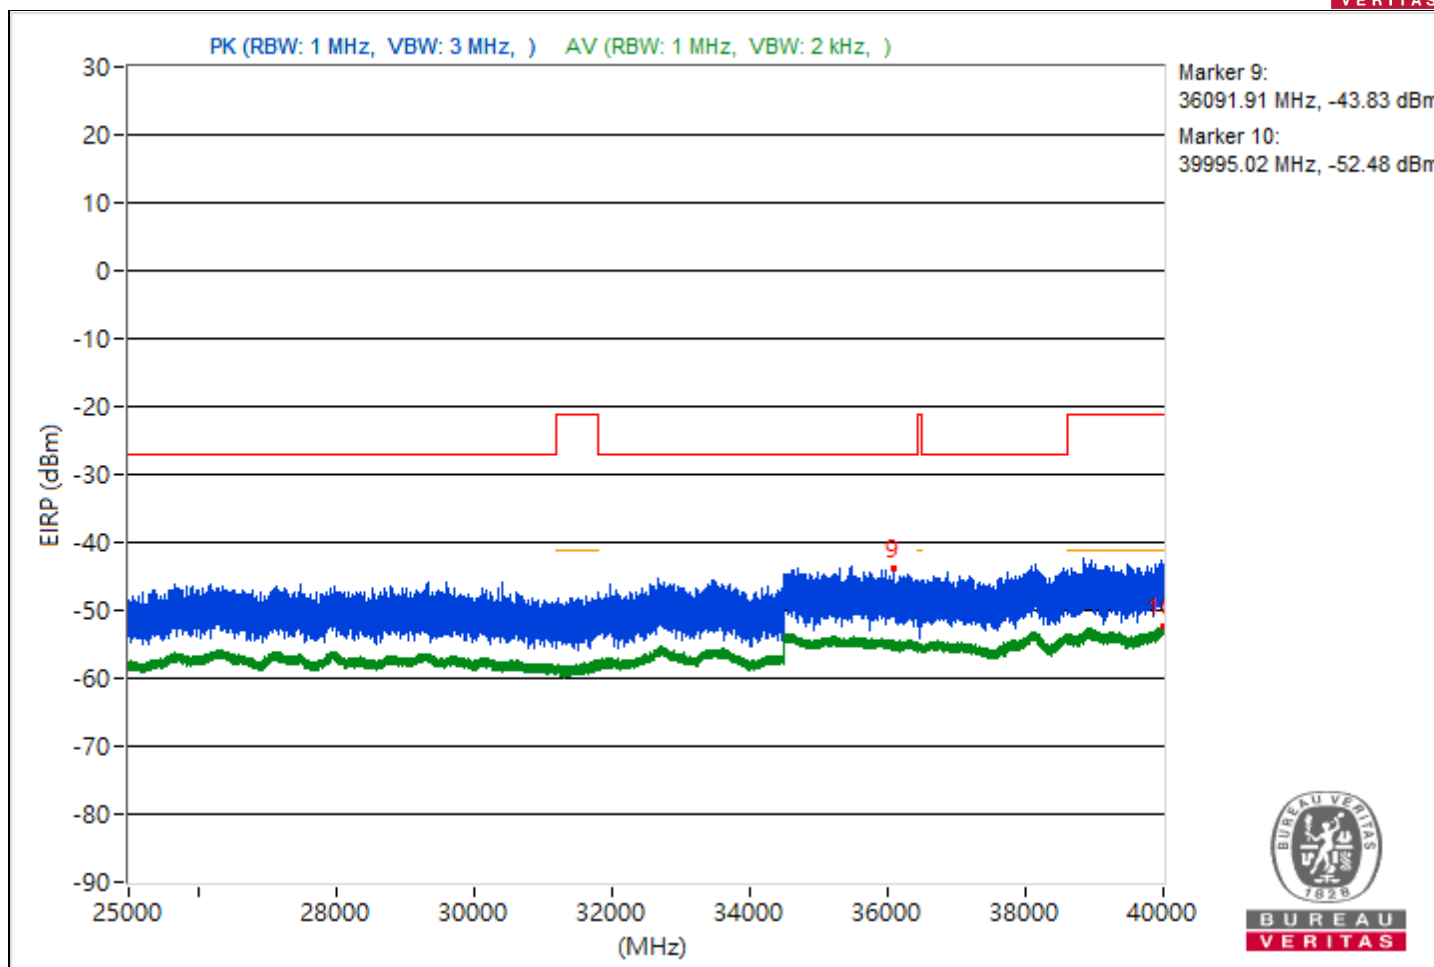





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4482.19	55.35 PK	68.26	-12.91	-49.12	-46.85	4.92	-39.91
2	3841.53	47.62 AV	54	-6.38	-55.88	-55.28	4.92	-47.64
3	#8983.11	55.6 PK	68.26	-12.66	-46.3	-49.42	4.92	-39.66
4	9000.18	44.86 AV	54	-9.14	-58.96	-57.79	4.92	-50.4
5	#14927.91	56.38 PK	68.26	-11.88	-45.79	-48.13	4.92	-38.88
6	18744	46.51 AV	54	-7.49	-57.1	-56.29	4.92	-48.75
7	#24030.7	59.12 PK	68.26	-9.14	-47.13	-42.29	4.92	-36.14
8	23926.8	48.97 AV	54	-5.03	-53.96	-54.5	4.92	-46.29
9	#35254.58	52.63 PK	68.26	-15.63	-49.42	-52.11	4.92	-42.63
10	39973.69	42.78 AV	54	-11.22	-60.14	-60.68	4.92	-52.48

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

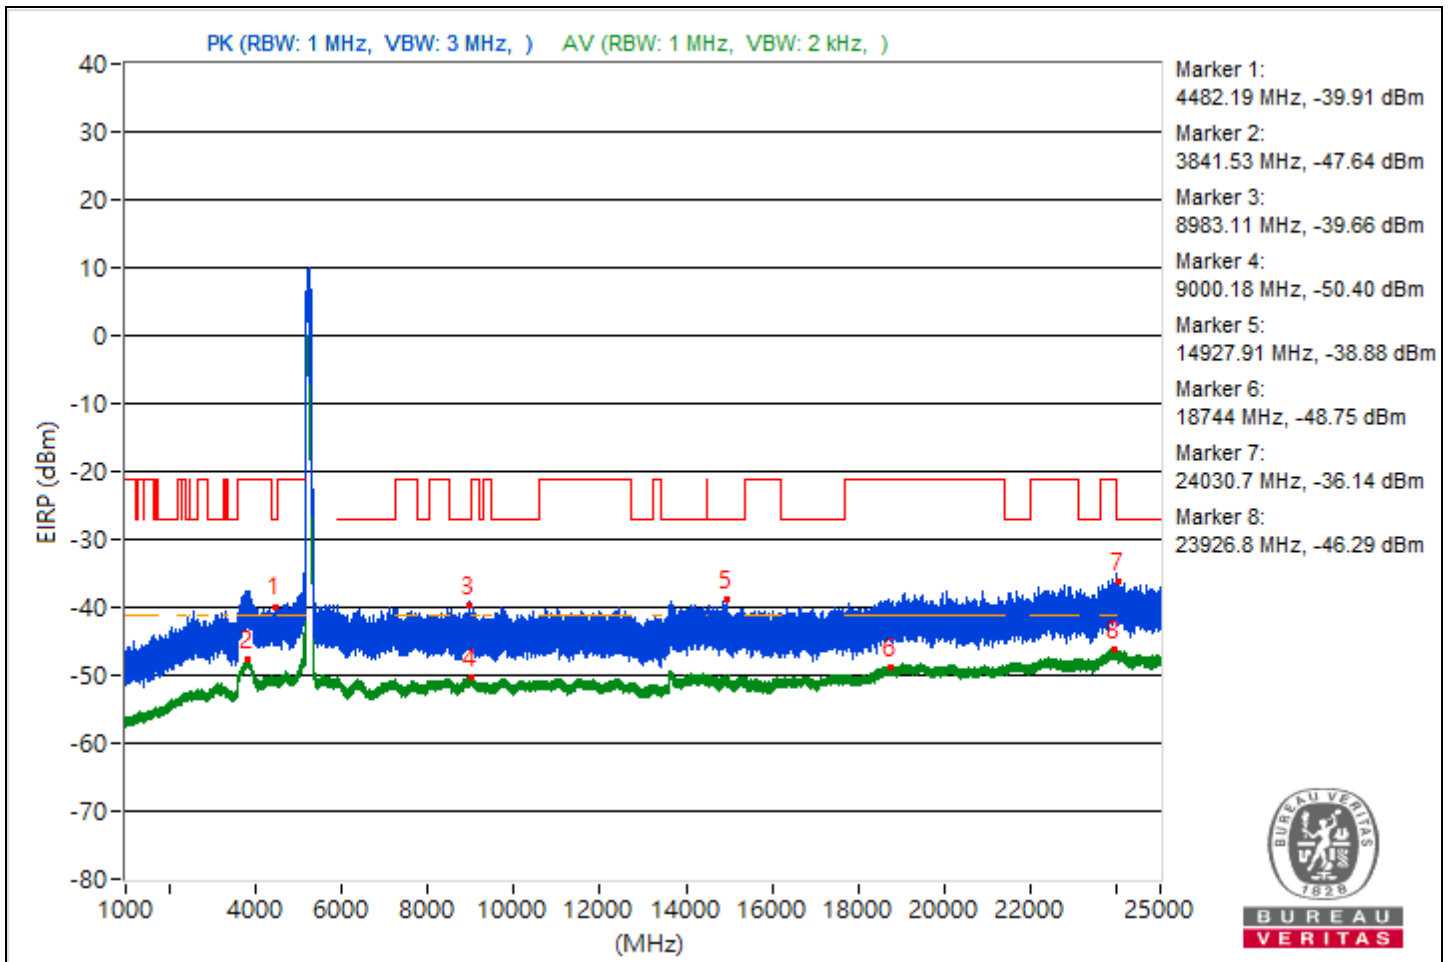

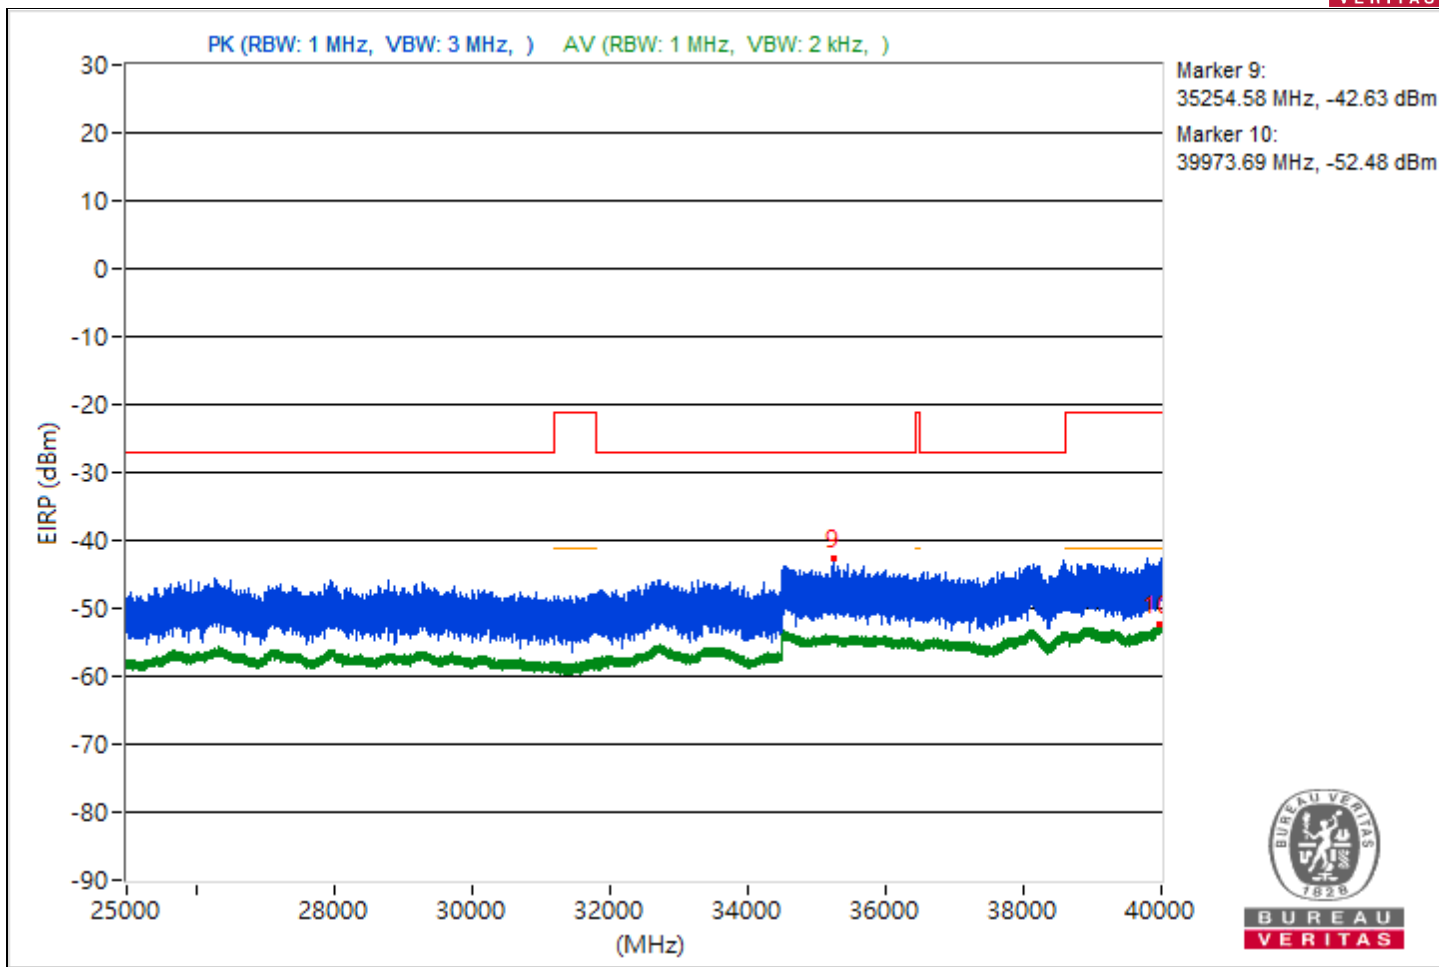





RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4462.28	55.63 PK	68.26	-12.63	-49.78	-46.1	4.92	-39.63
2	3809.64	47.51 AV	54	-6.49	-56.09	-55.31	4.92	-47.75
3	#7124.14	55.04 PK	68.26	-13.22	-46.36	-51.25	4.92	-40.22
4	11027.47	44.57 AV	54	-9.43	-59.52	-57.87	4.92	-50.69
5	#17345.7	56.37 PK	68.26	-11.89	-52.05	-44.52	4.92	-38.89
6	18746.1	46.79 AV	54	-7.21	-56.5	-56.3	4.92	-48.47
7	#24126.3	58.6 PK	68.26	-9.66	-47.89	-42.74	4.92	-36.66
8	23871	48.79 AV	54	-5.21	-53.78	-55.12	4.92	-46.47
9	#38119.11	51.9 PK	68.26	-16.36	-49.01	-56.43	4.92	-43.36
10	39992.89	43.13 AV	54	-10.87	-60.51	-59.65	4.92	-52.13

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

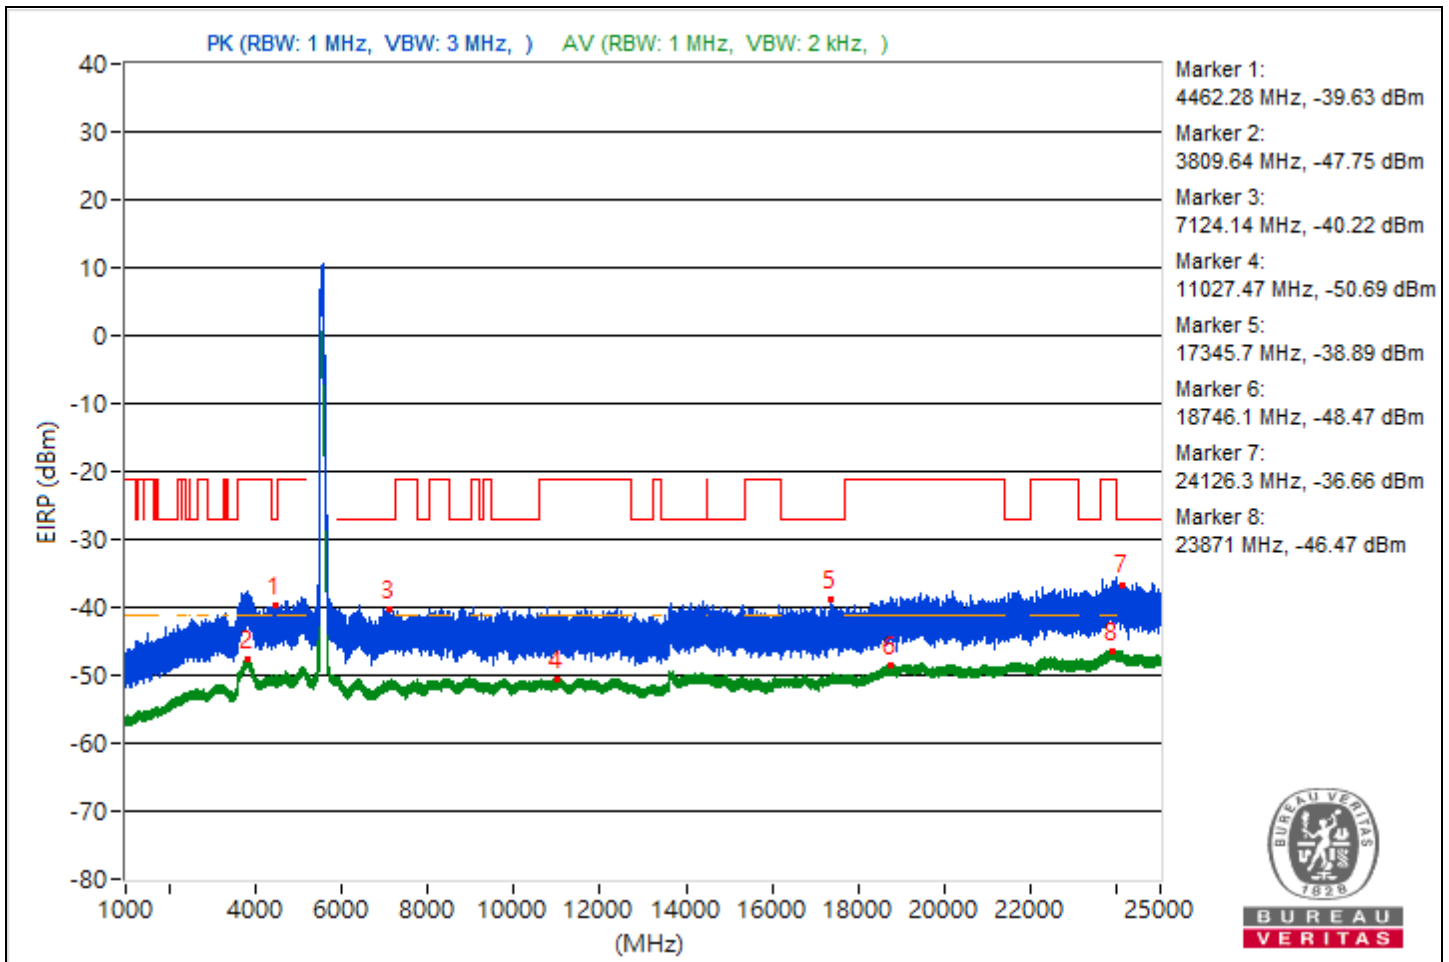

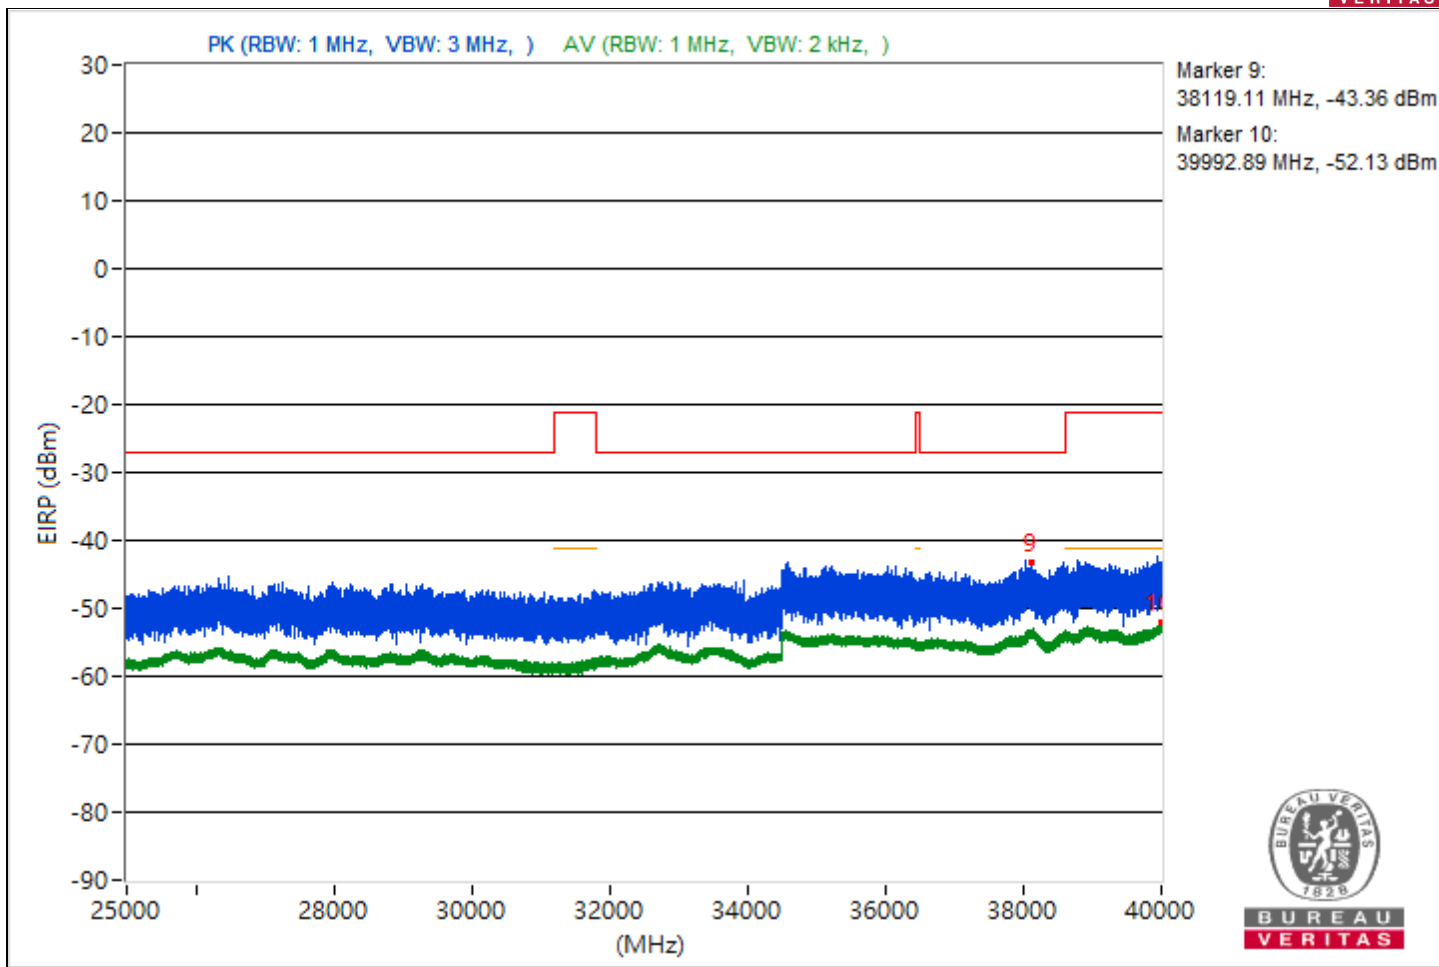





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#4439.02	54.72 PK	68.26	-13.54	-51.91	-46.58	4.92	-40.54
2	5098.42	48.06 AV	54	-5.94	-55.65	-54.67	4.92	-47.2
3	#7215.61	55.27 PK	68.26	-12.99	-50.47	-46.32	4.92	-39.99
4	8400.62	45.02 AV	54	-8.98	-58	-58.35	4.92	-50.24
5	#17649.6	55.77 PK	68.26	-12.49	-45.51	-50.89	4.92	-39.49
6	18959.1	46.54 AV	54	-7.46	-56.04	-57.36	4.92	-48.72
7	#24043.3	58.76 PK	68.26	-9.5	-42.31	-48.76	4.92	-36.5
8	23935.4	48.97 AV	54	-5.03	-53.69	-54.83	4.92	-46.29
9	#34521.69	51.72 PK	68.26	-16.54	-49.26	-56.19	4.92	-43.54
10	39989.78	43.06 AV	54	-10.94	-59.91	-60.35	4.92	-52.2

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

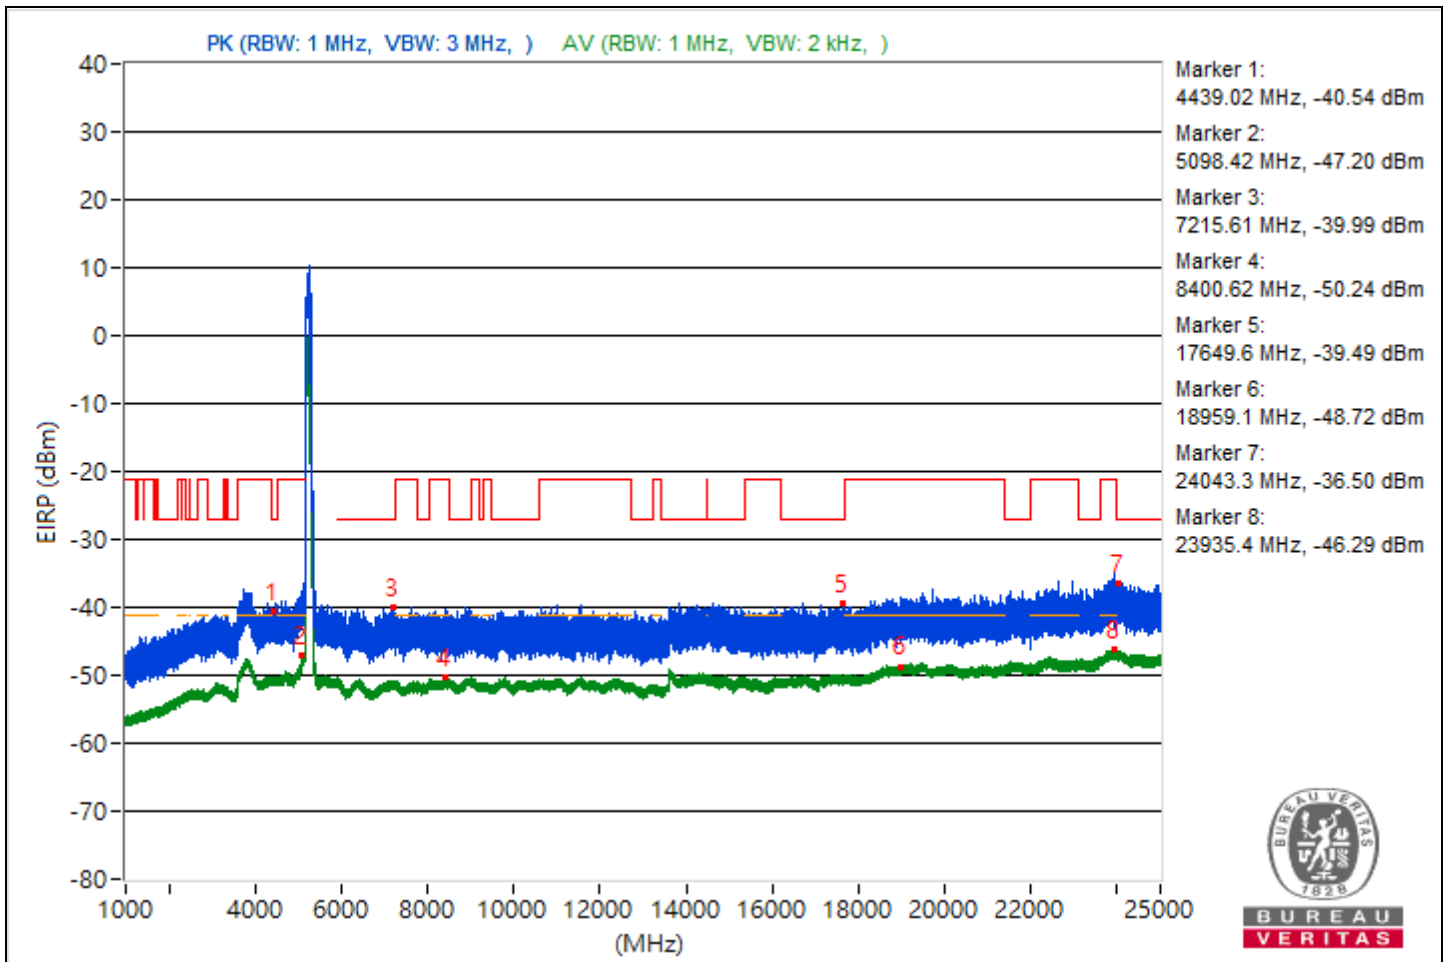

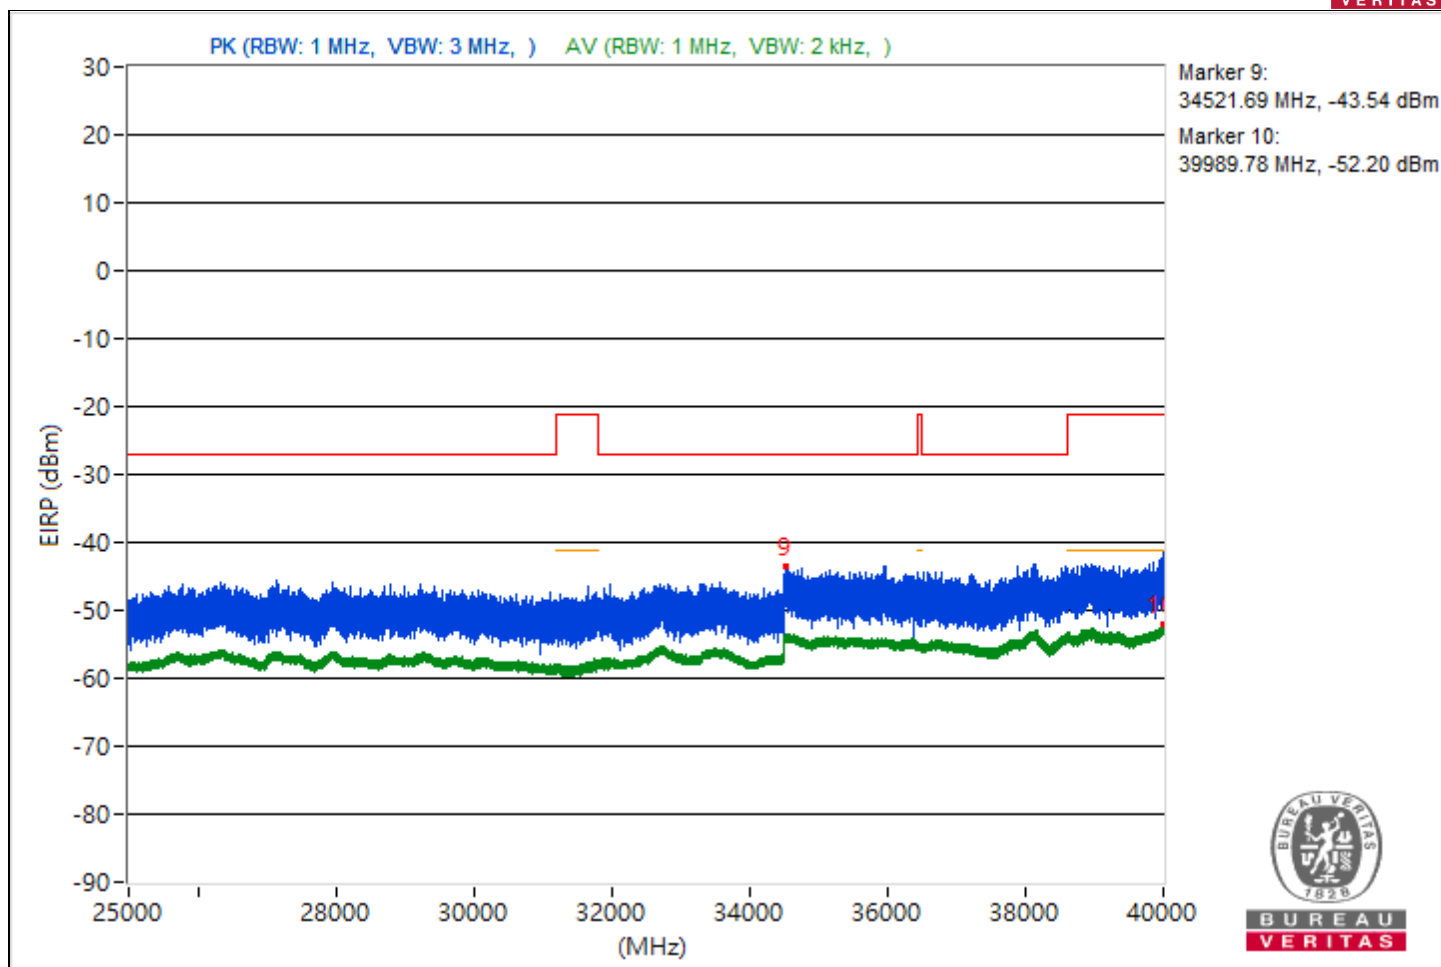





RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#3103.42	54.21 PK	68.26	-14.05	-53.17	-46.88	4.92	-41.05
2	3805.37	47.75 AV	54	-6.25	-54.86	-56.12	4.92	-47.51
3	#7207.52	55 PK	68.26	-13.26	-51.67	-46.29	4.92	-40.26
4	8403.56	44.75 AV	54	-9.25	-57.91	-59.05	4.92	-50.51
5	#13606.84	56.88 PK	68.26	-11.38	-47.35	-45.47	4.92	-38.38
6	18778.8	46.3 AV	54	-7.7	-55.97	-58.08	4.92	-48.96
7	#24098.4	58.71 PK	68.26	-9.55	-43.22	-46.26	4.92	-36.55
8	23949	48.82 AV	54	-5.18	-53.87	-54.94	4.92	-46.44
9	#35458.4	51.39 PK	68.26	-16.87	-49.8	-55.62	4.92	-43.87
10	39978.13	42.87 AV	54	-11.13	-59.99	-60.69	4.92	-52.39

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

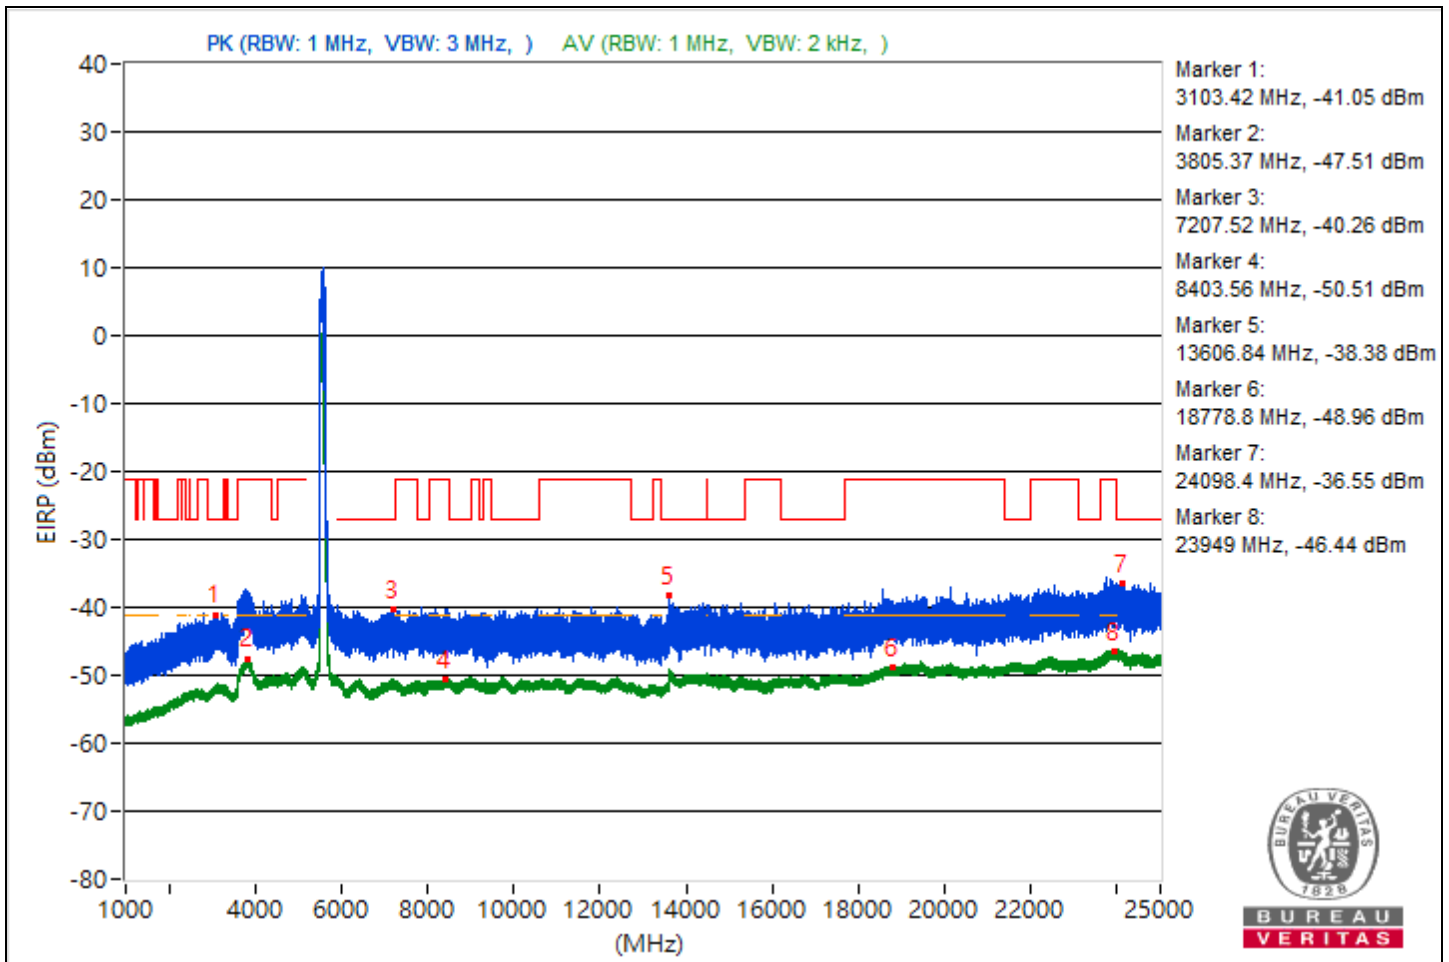

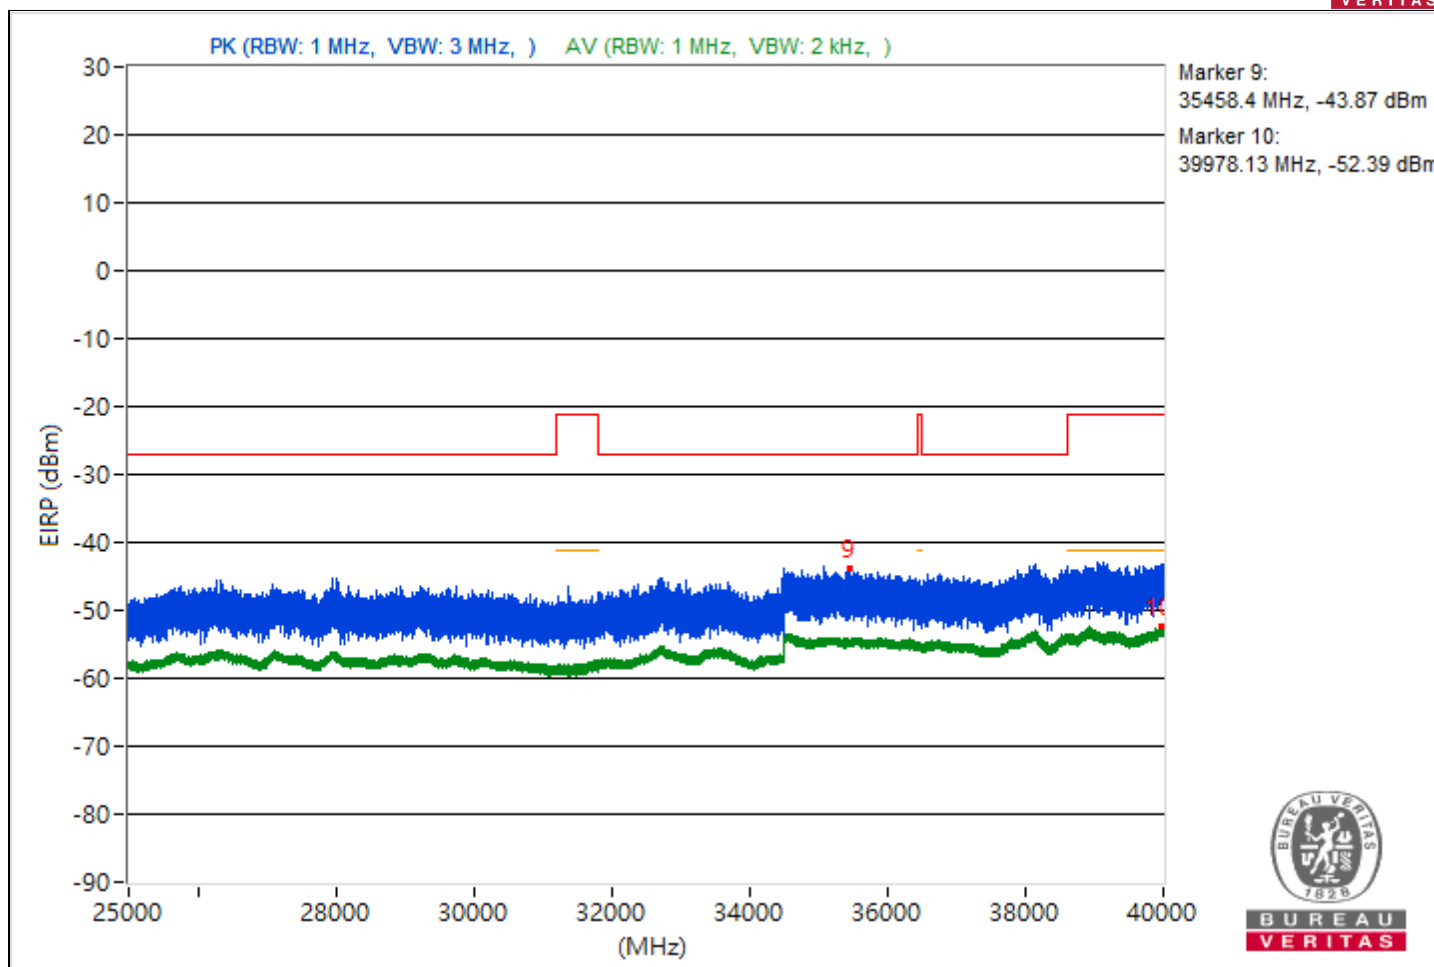


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5261.32	119.05 PK			17.54	13.11	4.92	23.79
2	*5259.65	108.93 AV			5.62	5.86	4.92	13.67
3	5434.48	63.9 PK	74	-10.1	-37.68	-41.85	4.92	-31.36
4	5353.48	46.13 AV	54	-7.87	-57.37	-56.77	4.92	-49.13

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

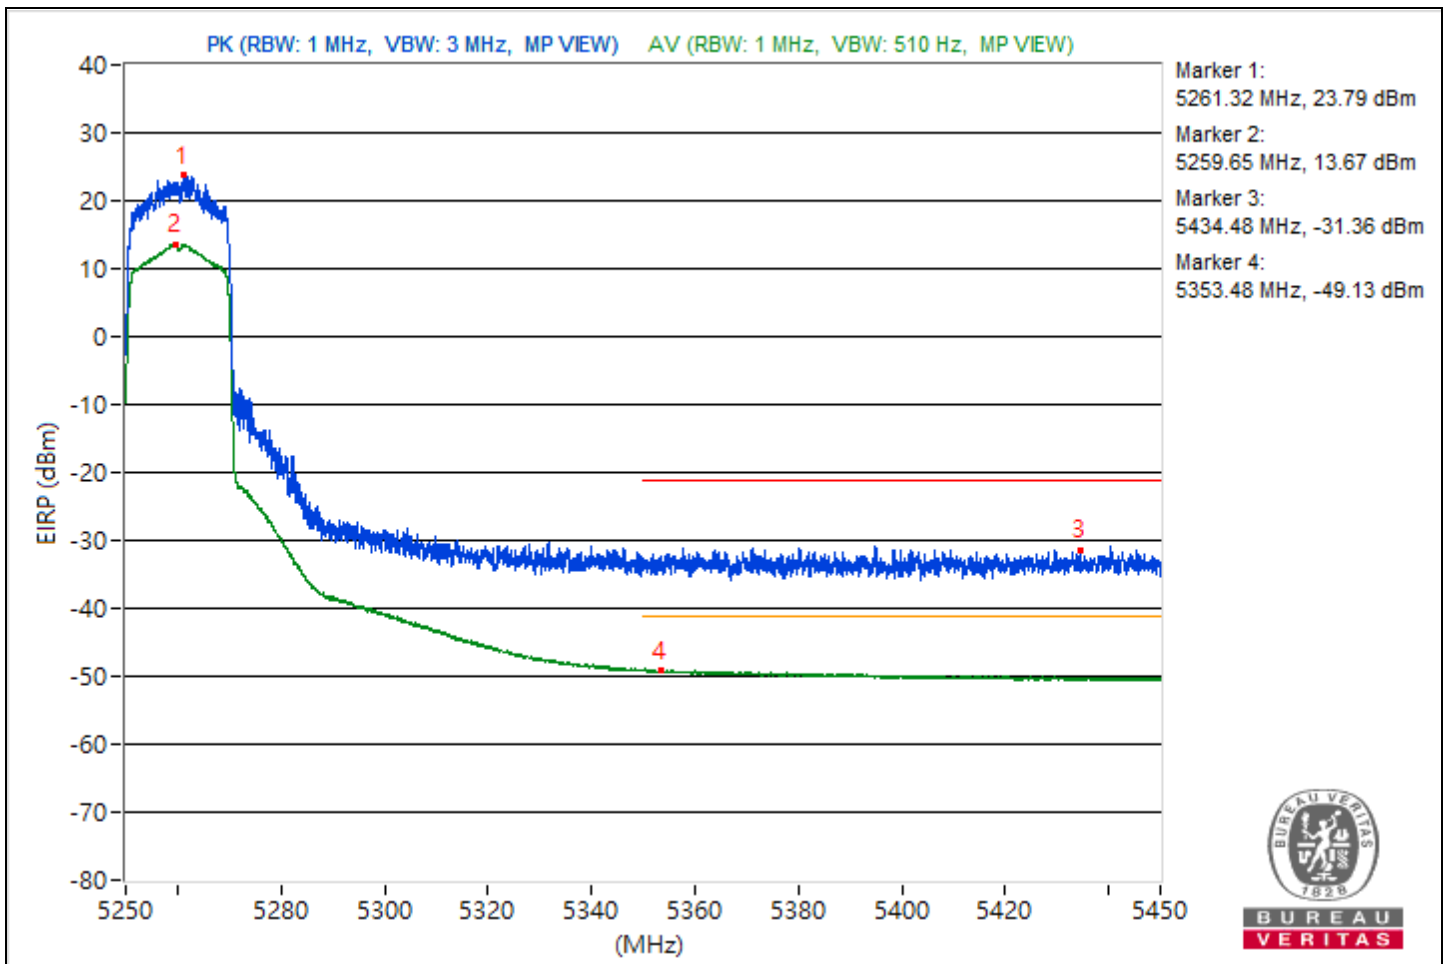


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5301.18	117.98 PK			14.35	15.19	4.92	22.72
2	*5299.12	108.66 AV			5.42	5.53	4.92	13.4
3	5438.07	64.7 PK	74	-9.3	-36.62	-41.81	4.92	-30.56
4	5351.27	47.28 AV	54	-6.72	-56.02	-55.81	4.92	-47.98

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

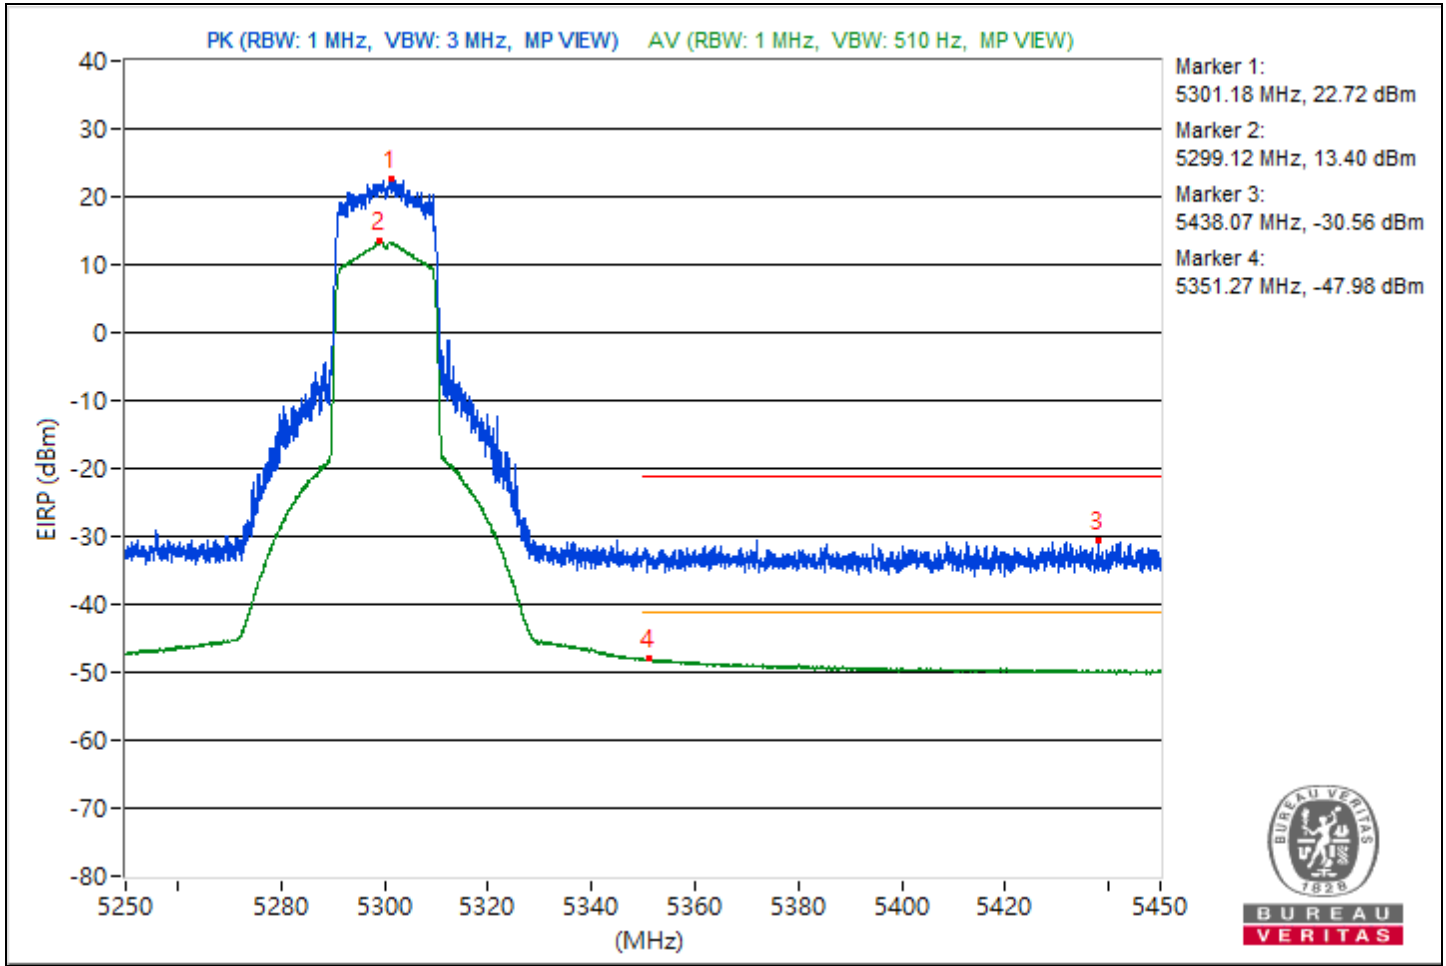


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5320.82	118.76 PK			16.8	13.85	4.92	23.5
2	*5321.12	108.79 AV			5.73	5.47	4.92	13.53
3	5447.62	64.11 PK	74	-9.89	-37.81	-40.88	4.92	-31.15
4	5350.07	49.07 AV	54	-4.93	-54.28	-53.98	4.92	-46.19

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

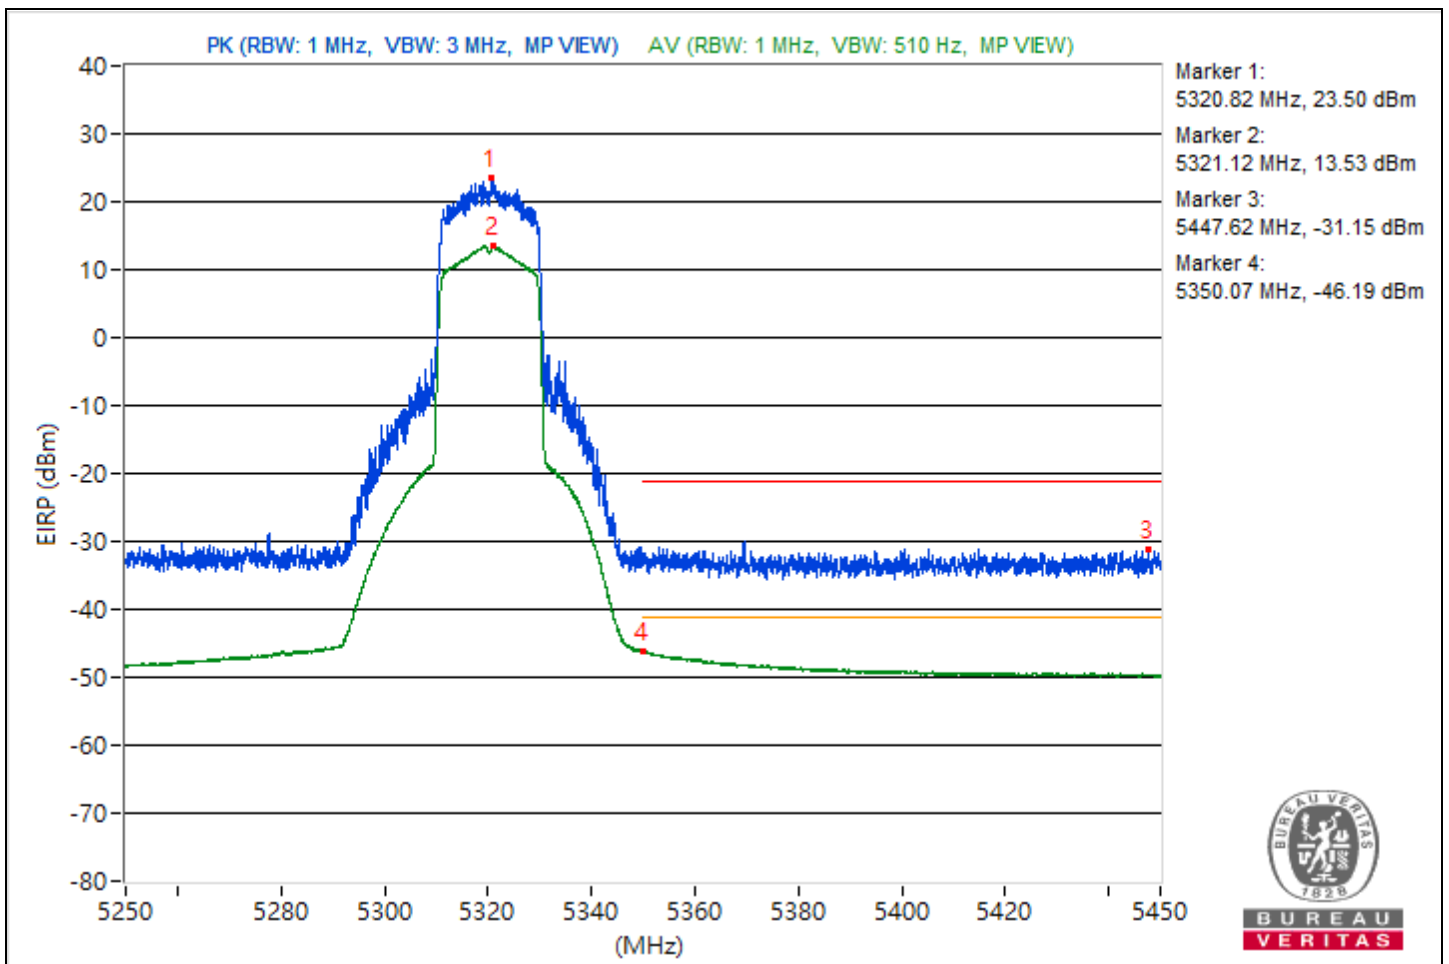


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5499.78	118.75 PK			14.06	16.67	4.92	23.49
2	5388.66	64.18 PK	74	-9.82	-43.22	-36.91	4.92	-31.08
3	#5463.84	64.63 PK	68.26	-3.63	-37.98	-39.22	4.92	-30.63
4	*5501.09	108.76 AV			5.56	5.59	4.92	13.5
5	5459.91	48.19 AV	54	-5.81	-55.37	-54.66	4.92	-47.07

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

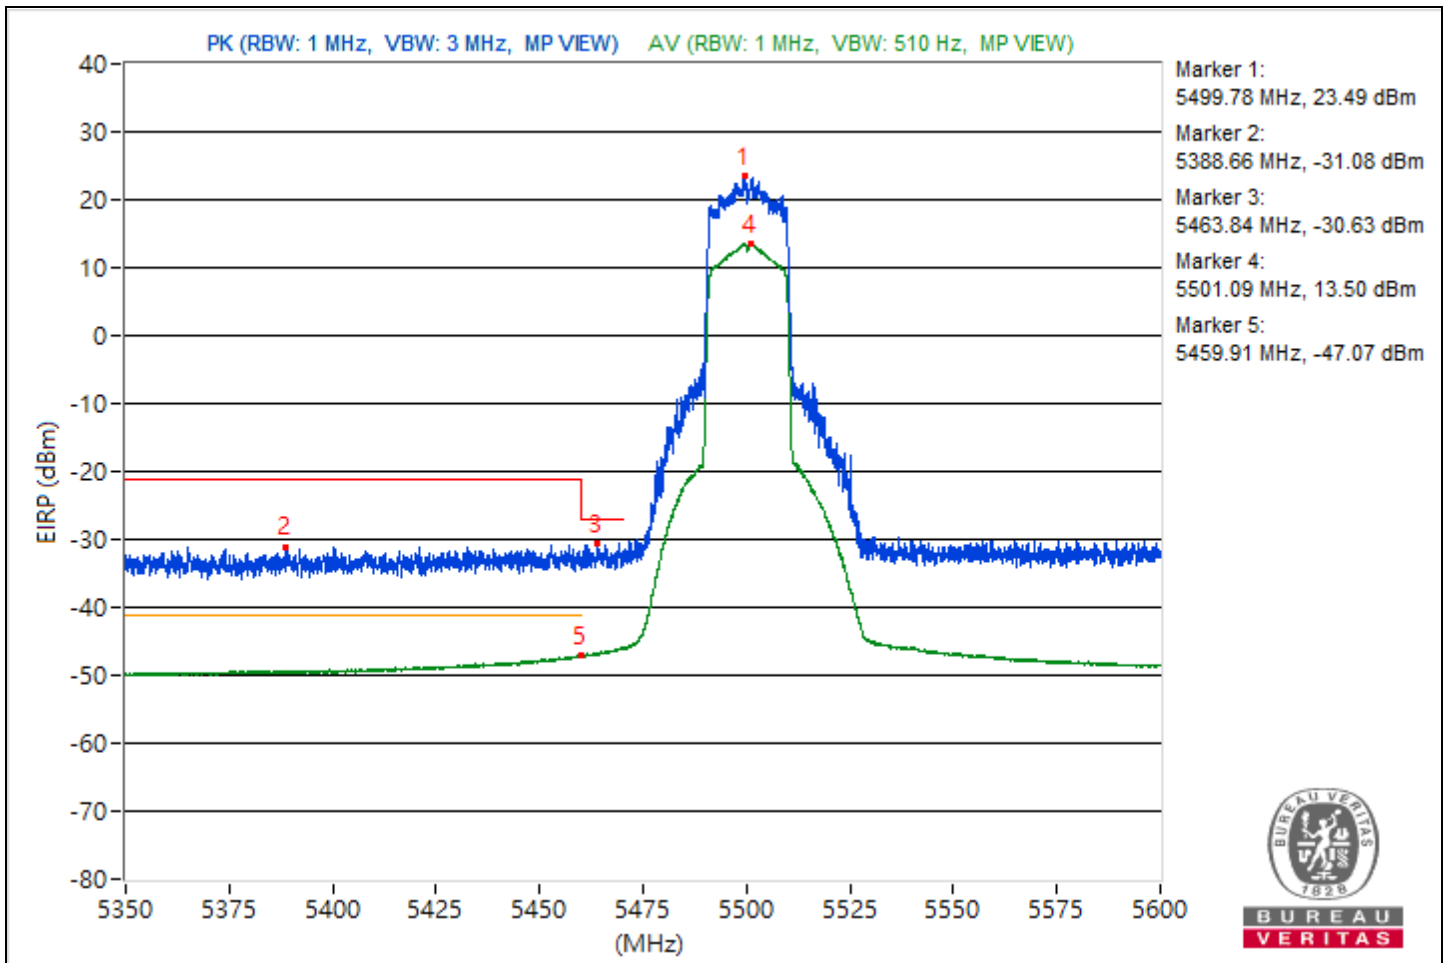


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5578.47	119.07 PK			16.55	15.08	4.92	23.81
2	5454.87	64.79 PK	74	-9.21	-37.44	-39.64	4.92	-30.47
3	#5463.44	64.56 PK	68.26	-3.7	-41.67	-36.86	4.92	-30.7
4	*5581.03	109.05 AV			5.94	5.77	4.92	13.79
5	5459.5	45.88 AV	54	-8.12	-57.49	-57.14	4.92	-49.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

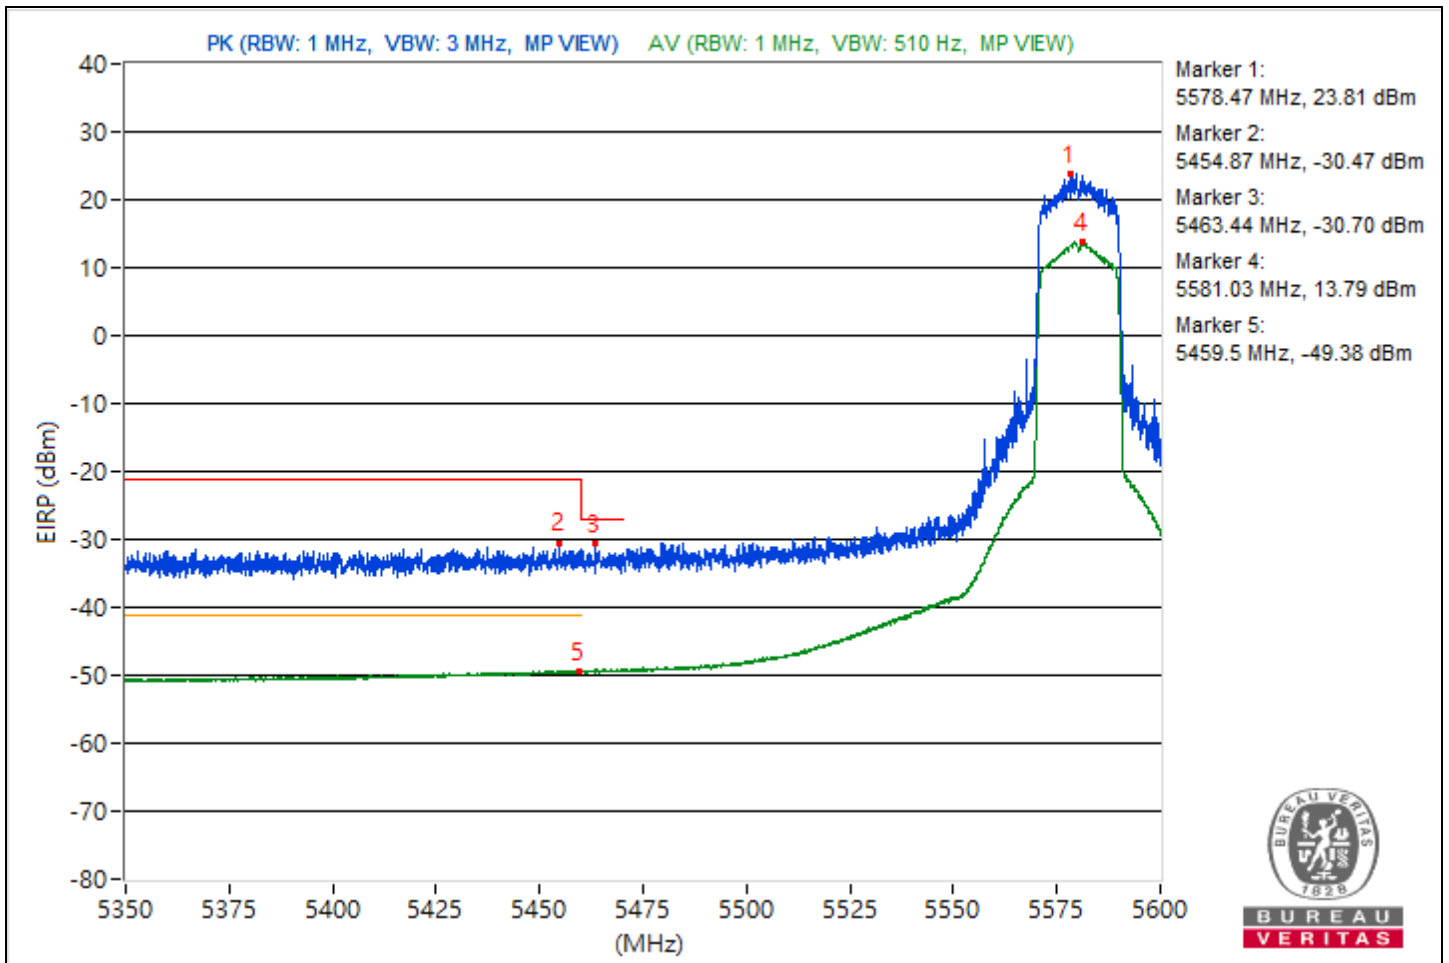


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5699.5	117.71			11.73	16.2	4.92	22.45
2	#5725.43	65.52	68.26	-2.74	-36	-40.42	4.92	-29.74

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

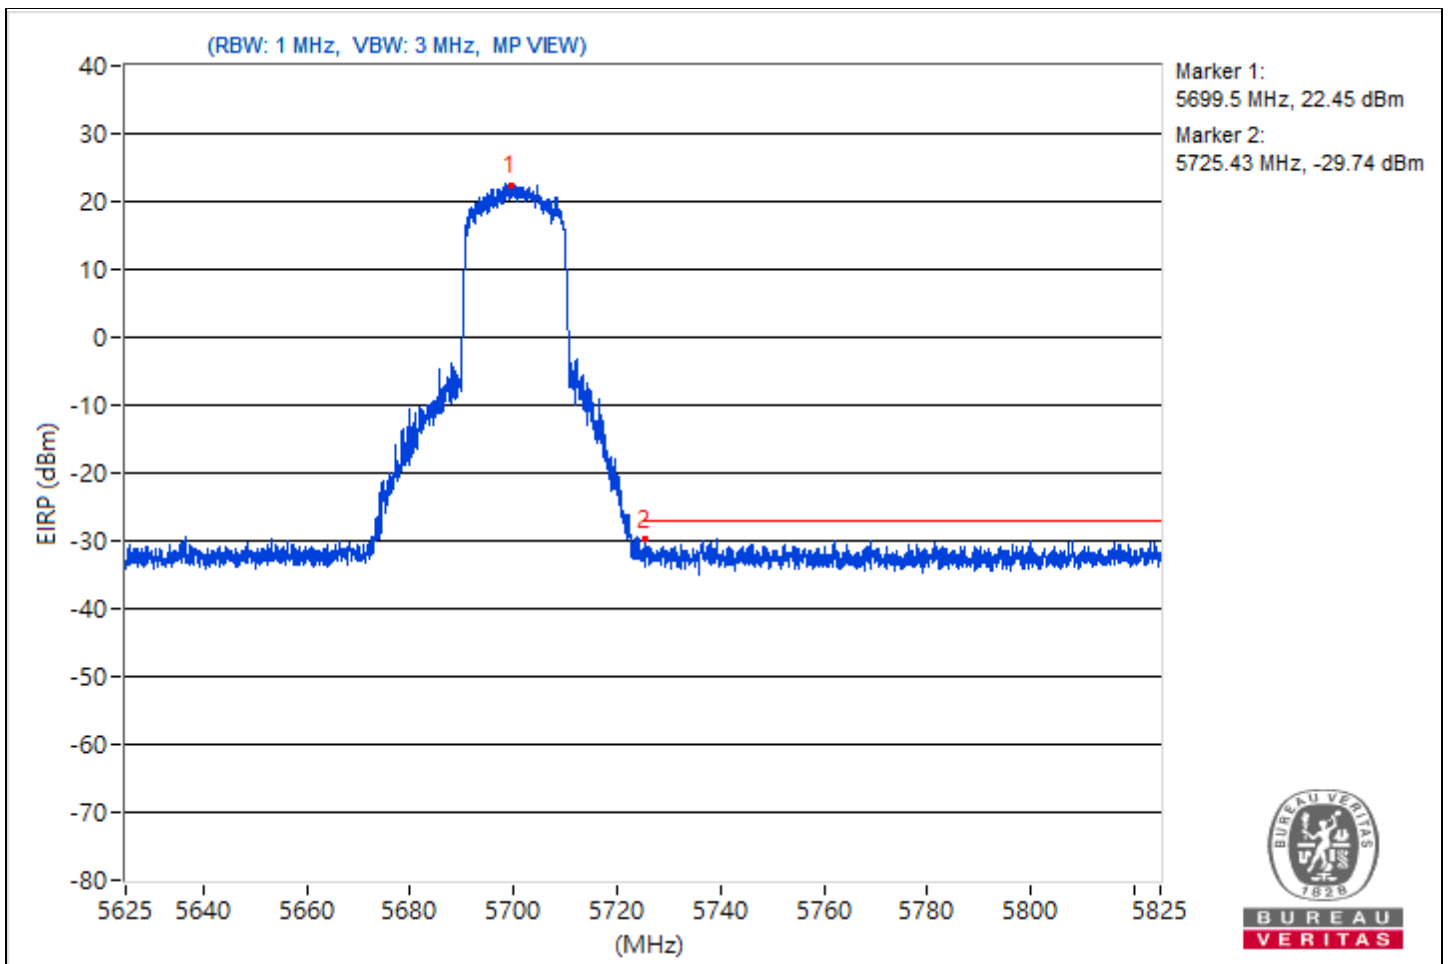

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5721.07	118.16			15.61	14.21	4.92	22.9
2	#5888.14	65.59	68.26	-2.67	-36.18	-39.72	4.92	-29.67

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

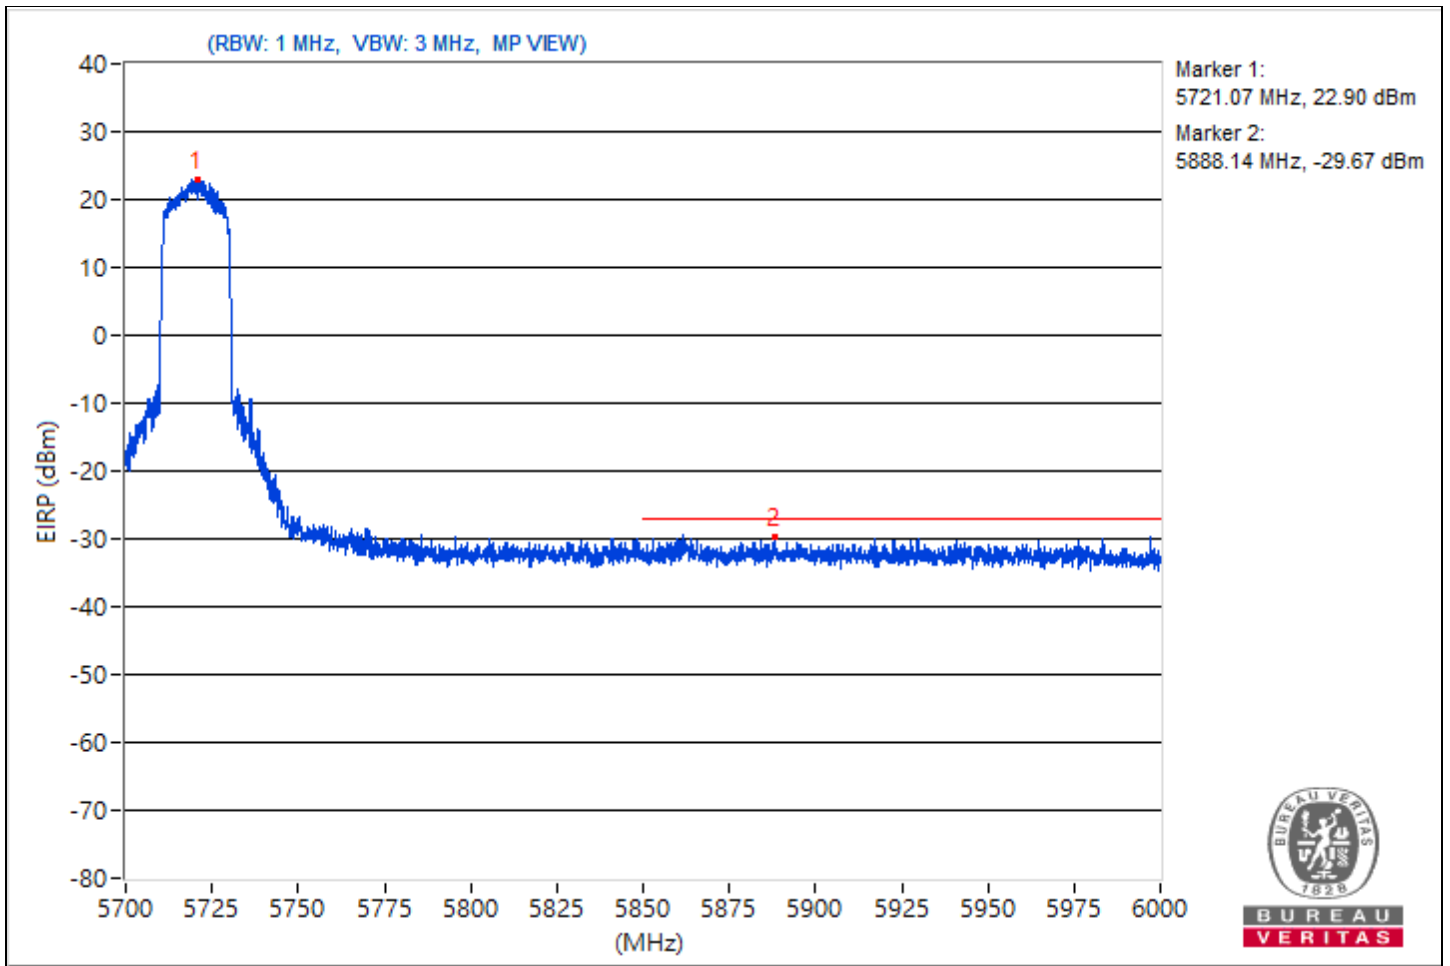


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5267.62	117.17 PK			15.14	12.39	4.92	21.91
2	*5269.43	107.23 AV			3.93	4.14	4.92	11.97
3	5350.2	65.89 PK	74	-8.11	-39.81	-35.72	4.92	-29.37
4	5350.23	52.63 AV	54	-1.37	-50.23	-50.91	4.92	-42.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

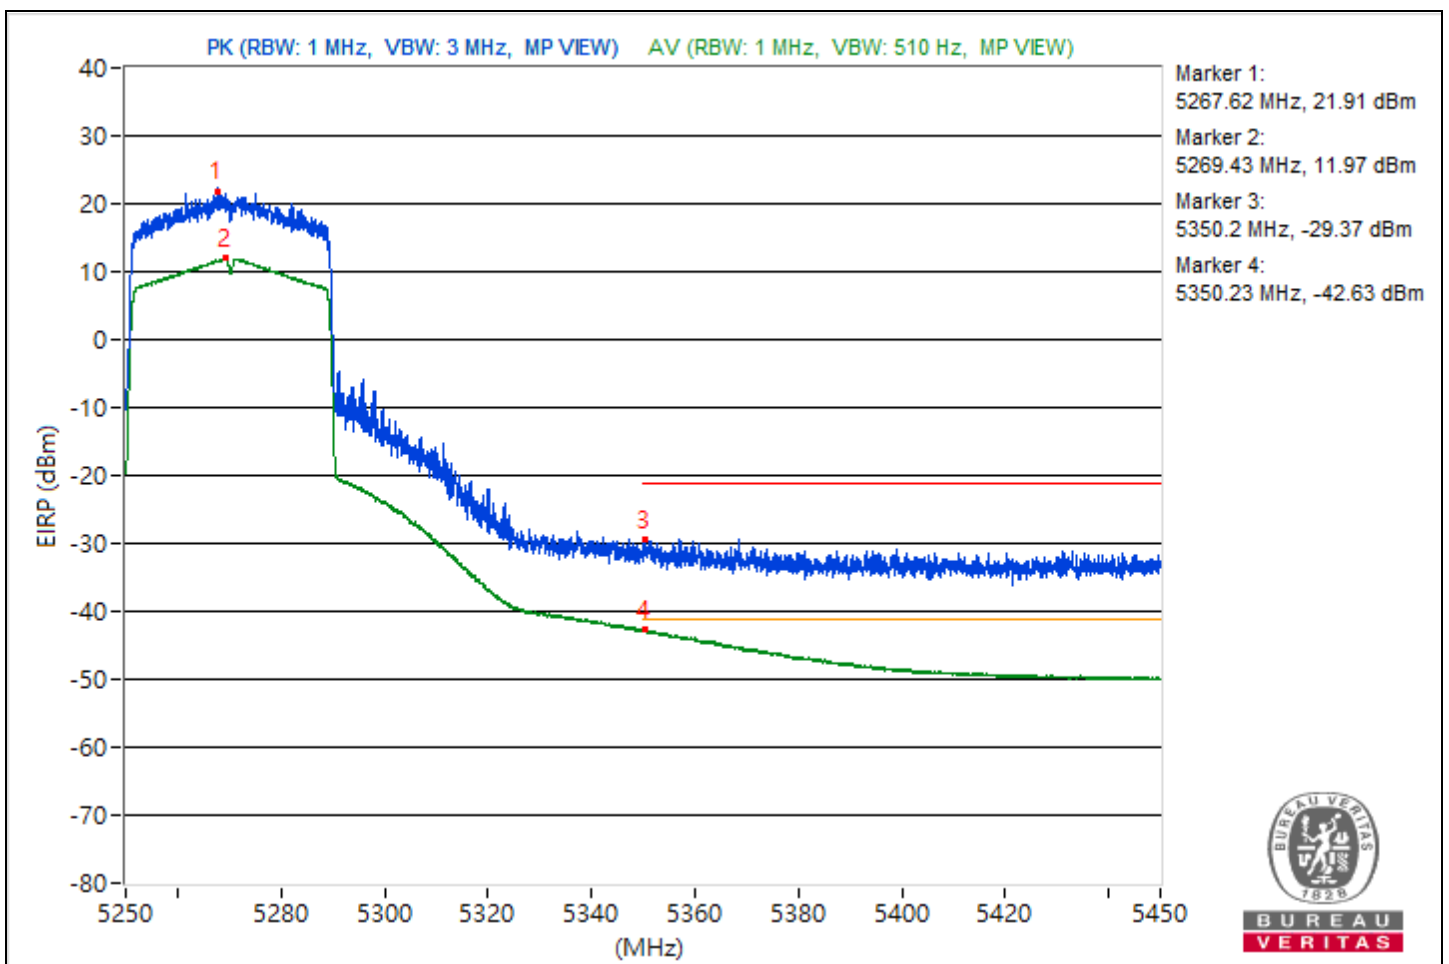


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5311.5	115.49 PK			11.11	13.23	4.92	20.23
2	*5311.62	105.22 AV			2.22	1.84	4.92	9.96
3	5351.23	65.47 PK	74	-8.53	-40.32	-36.1	4.92	-29.79
4	5350.37	49.58 AV	54	-4.42	-54	-53.26	4.92	-45.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

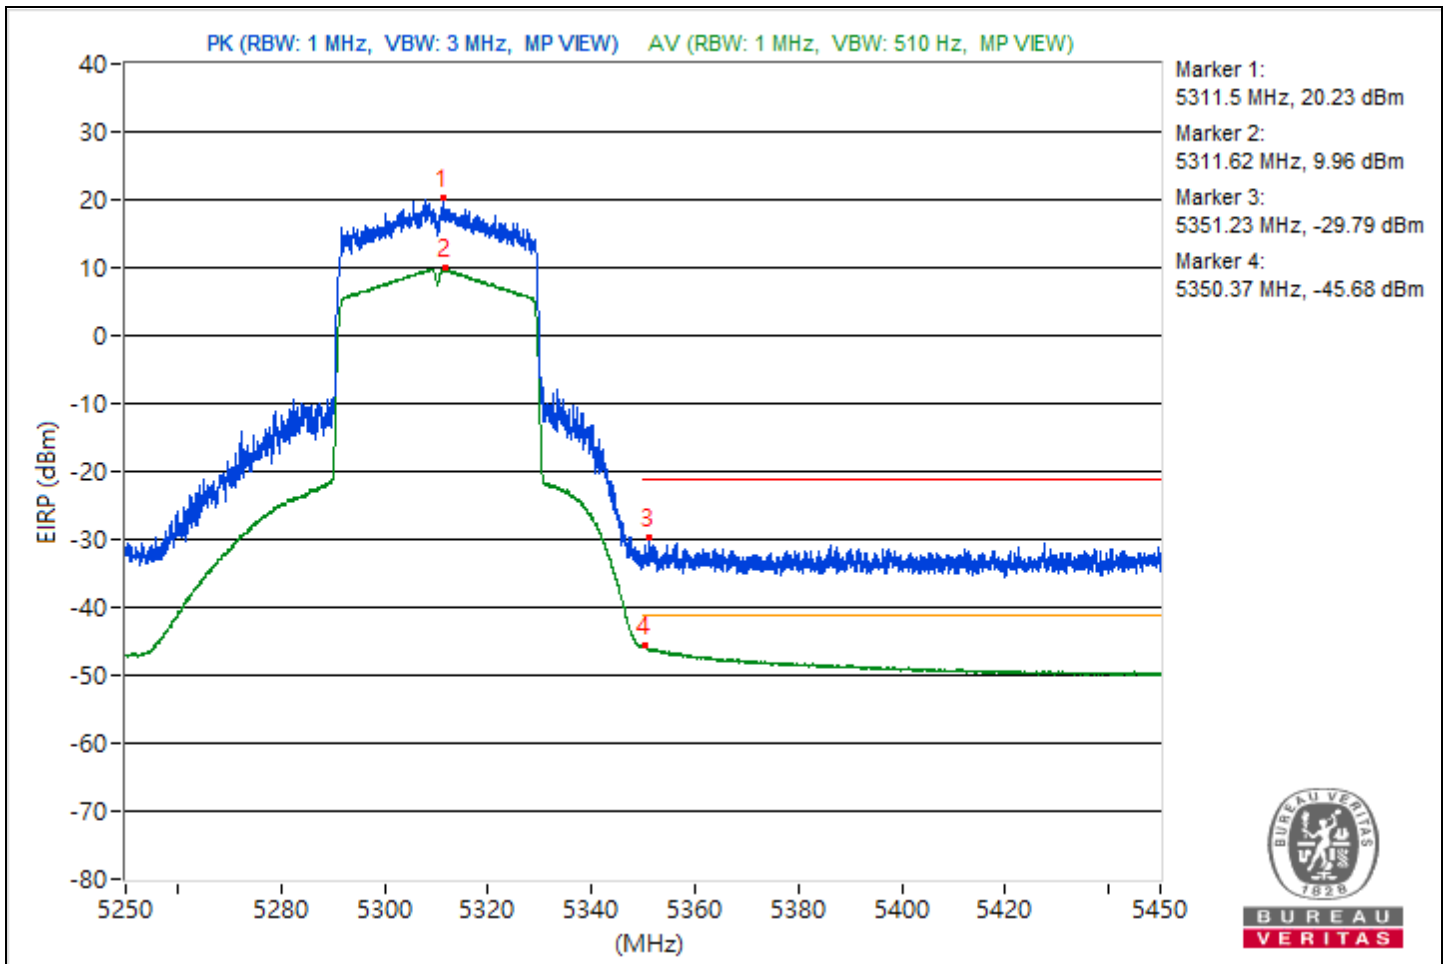


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5509.12	116.27 PK			12.11	13.88	4.92	21.01
2	5445.31	65.88 PK	74	-8.12	-36.58	-38.19	4.92	-29.38
3	#5466.72	65.52 PK	68.26	-2.74	-39.45	-36.41	4.92	-29.74
4	*5509.47	105.71 AV			2.68	2.36	4.92	10.45
5	5458.94	49.32 AV	54	-4.68	-53.9	-53.83	4.92	-45.94

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

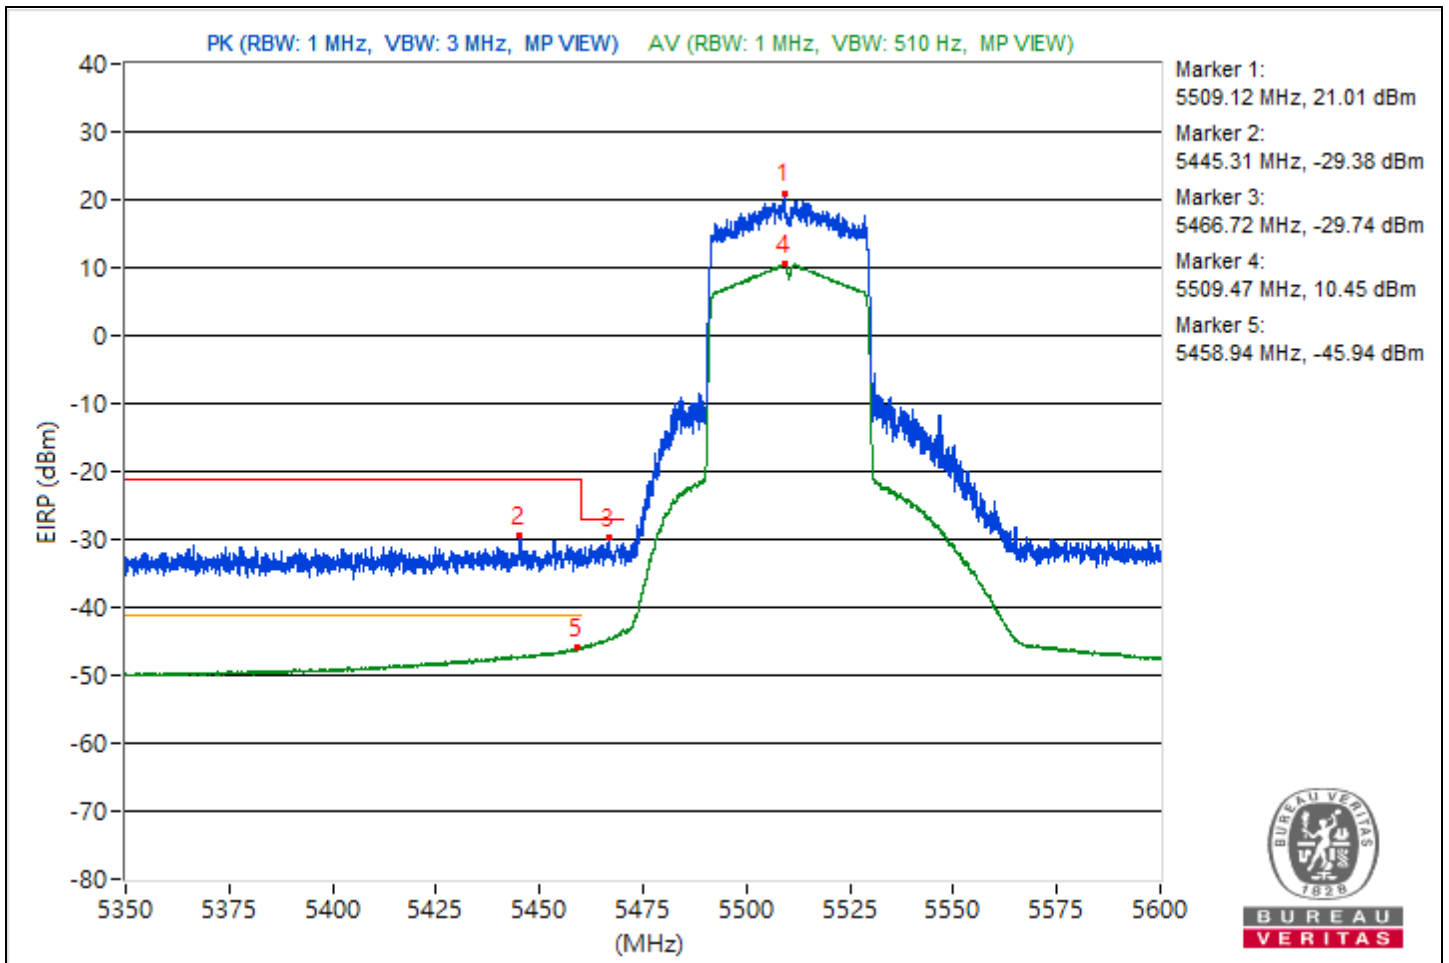


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5556.5	116.63 PK			11.97	14.53	4.92	21.37
2	5458.16	66.62 PK	74	-7.38	-37.19	-36.03	4.92	-28.64
3	#5463.41	65.85 PK	68.26	-2.41	-39.6	-35.86	4.92	-29.41
4	*5551.72	107.27 AV			4.21	3.95	4.92	12.01
5	5459.84	51.49 AV	54	-2.51	-51.53	-51.88	4.92	-43.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

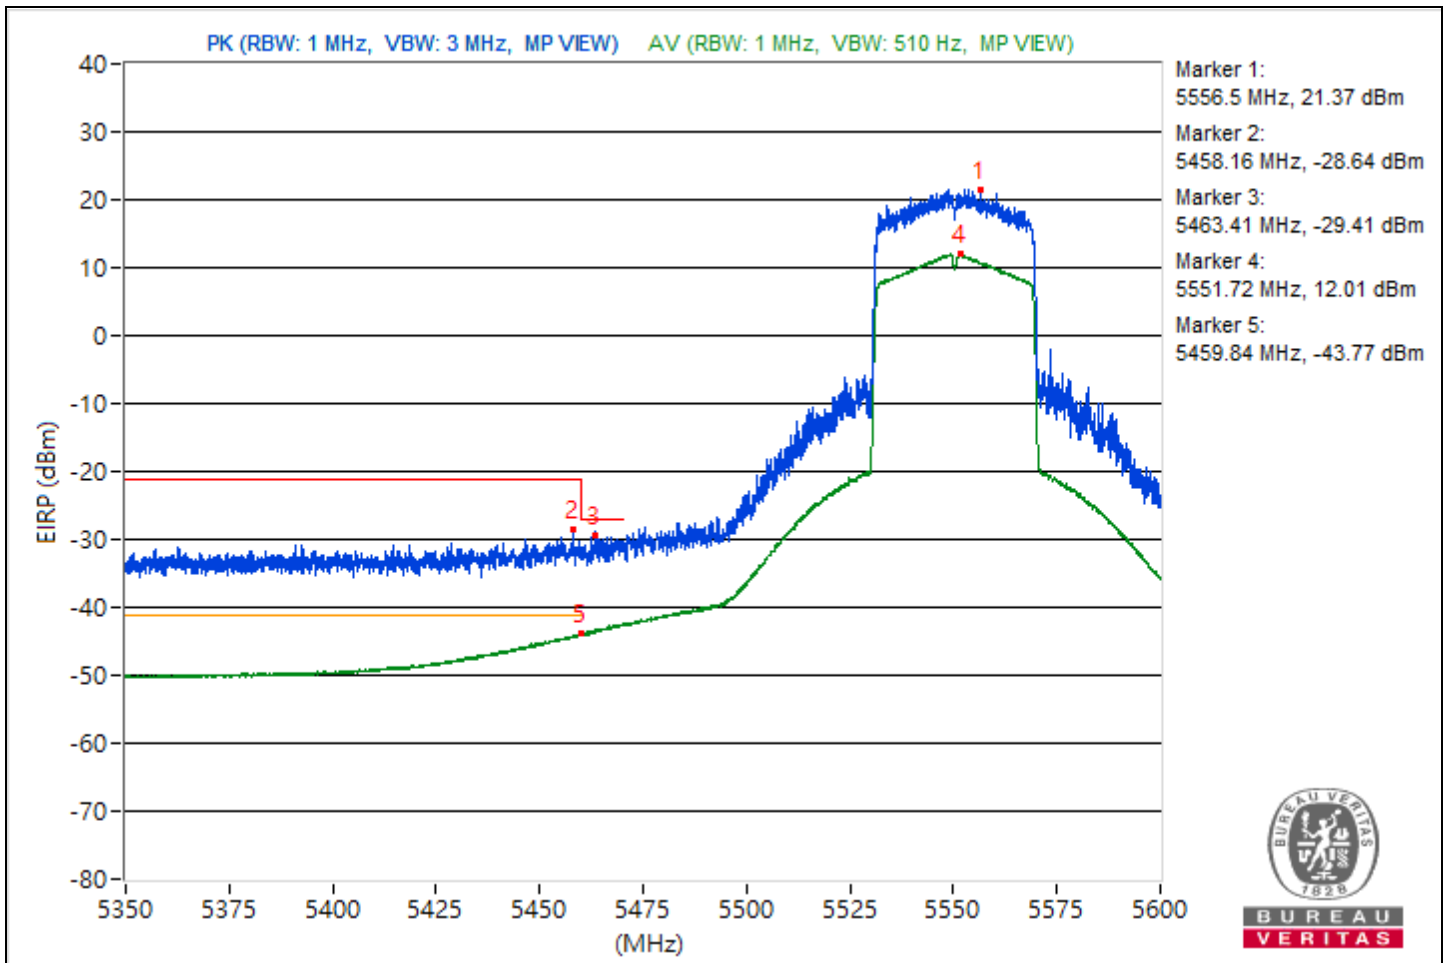


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5668.07	117.5			11.53	15.99	4.92	22.24
2	#5744.9	65.66	68.26	-2.6	-36.27	-39.3	4.92	-29.6

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

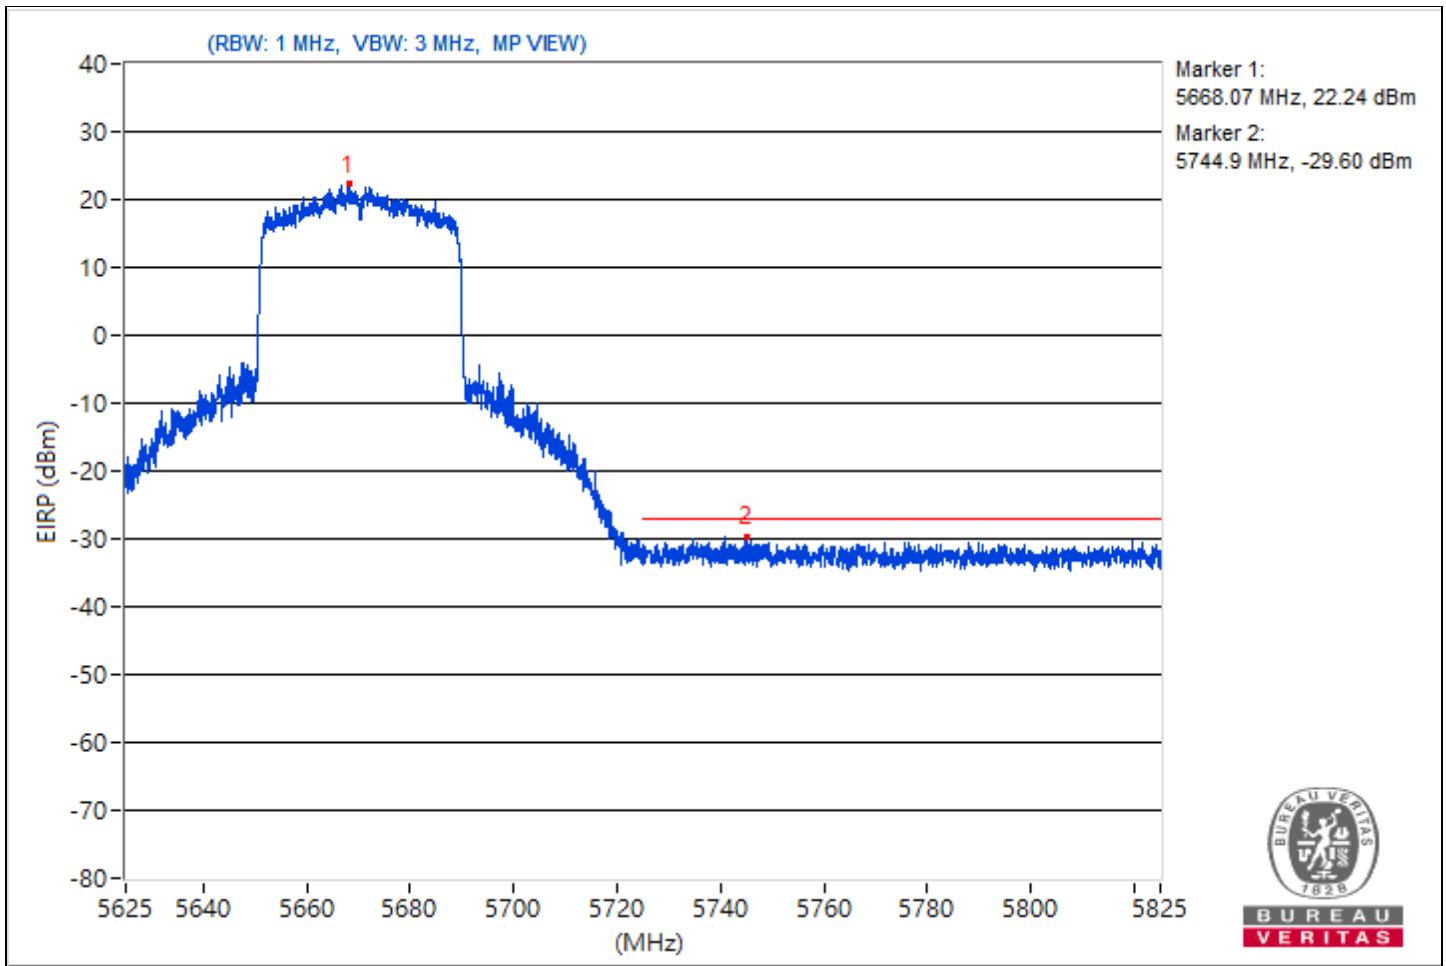


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5716.12	116.88			14.43	12.81	4.92	21.62
2	#5988.49	65.46	68.26	-2.8	-35.86	-41.09	4.92	-29.8

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

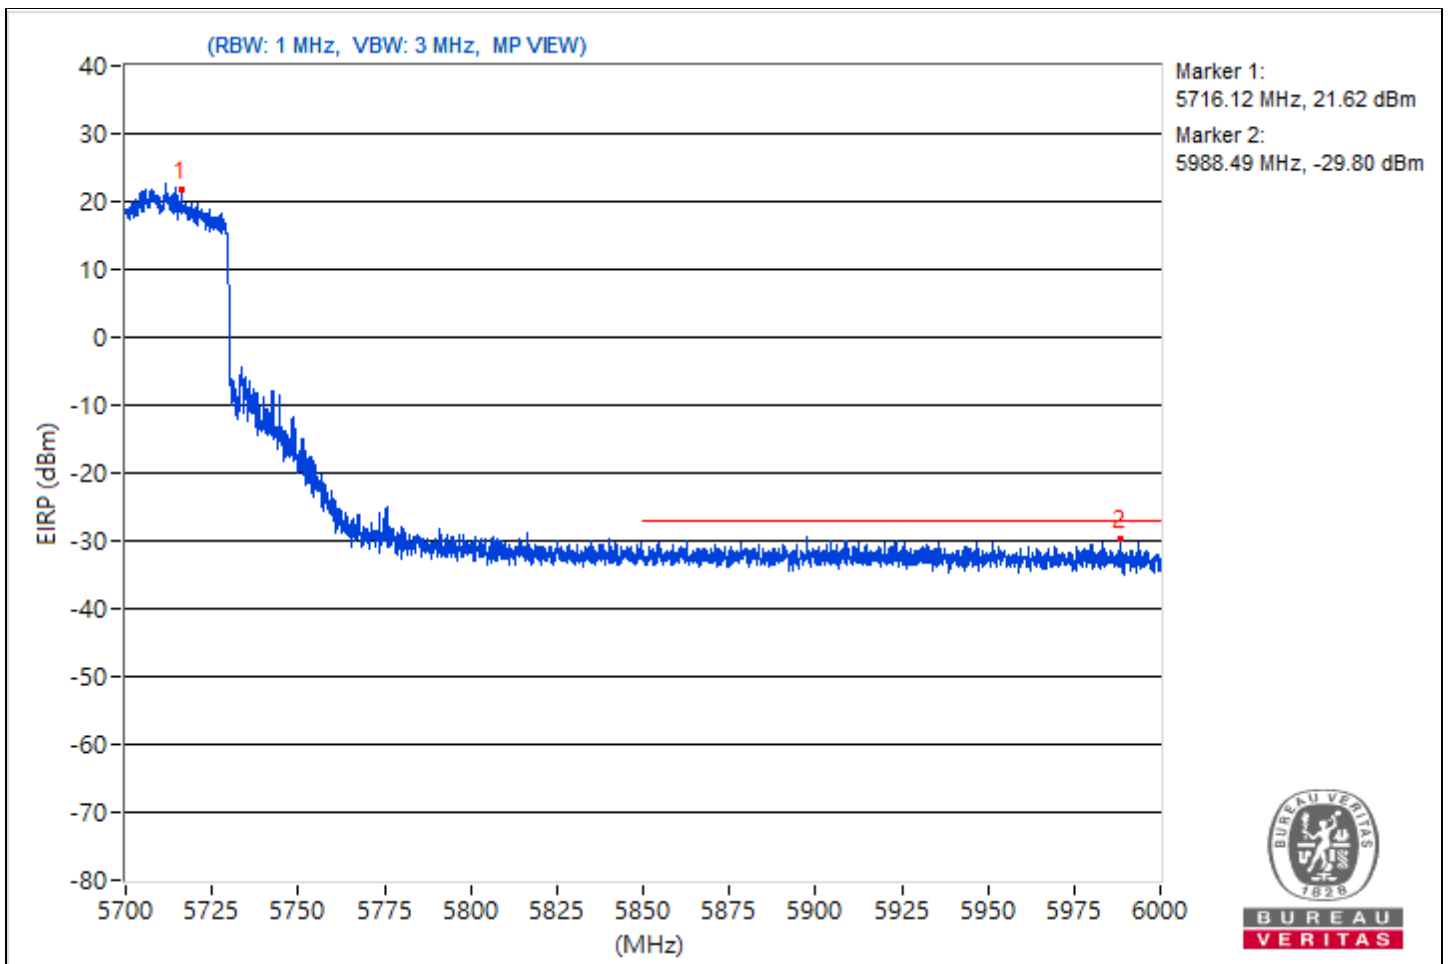


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5293.8	111.16 PK			4.49	9.88	4.92	15.9
2	*5289.07	101.06 AV			-2.36	-1.92	4.92	5.8
3	5411.27	64.6 PK	74	-9.4	-40.65	-37.19	4.92	-30.66
4	5352.6	50.02 AV	54	-3.98	-53.09	-53.26	4.92	-45.24

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

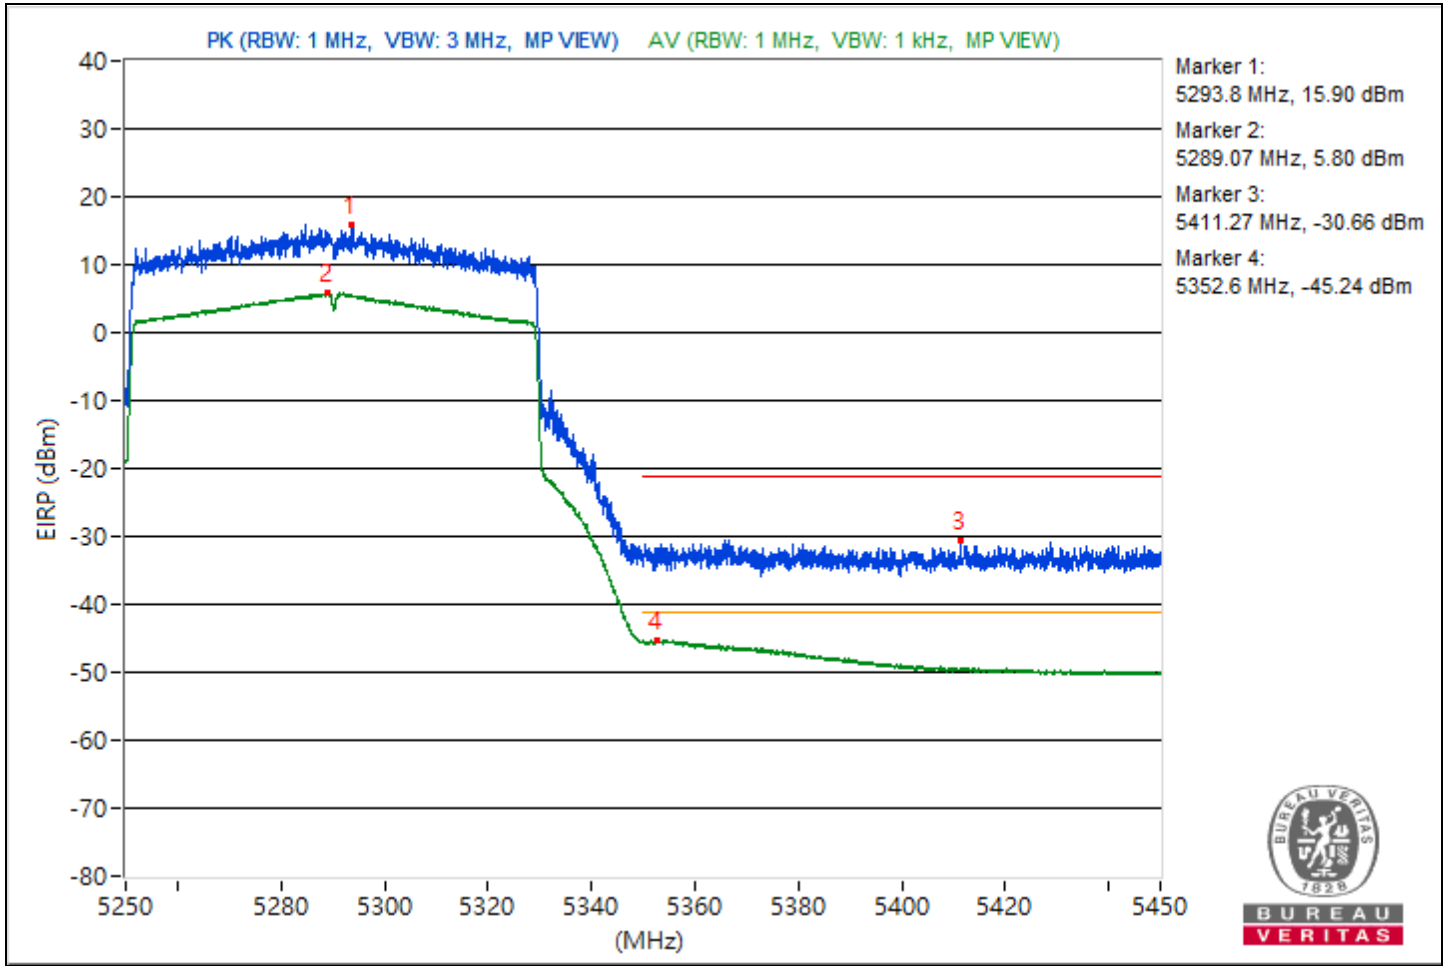


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5526.91	112.16 PK			5.47	10.88	4.92	16.9
2	5390.12	64.57 PK	74	-9.43	-38.38	-38.88	4.92	-30.69
3	#5462.94	64.37 PK	68.26	-3.89	-37.84	-40.09	4.92	-30.89
4	*5531.34	101.72 AV			-1.68	-1.26	4.92	6.46
5	5459.41	47.98 AV	54	-6.02	-54.84	-55.63	4.92	-47.28

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

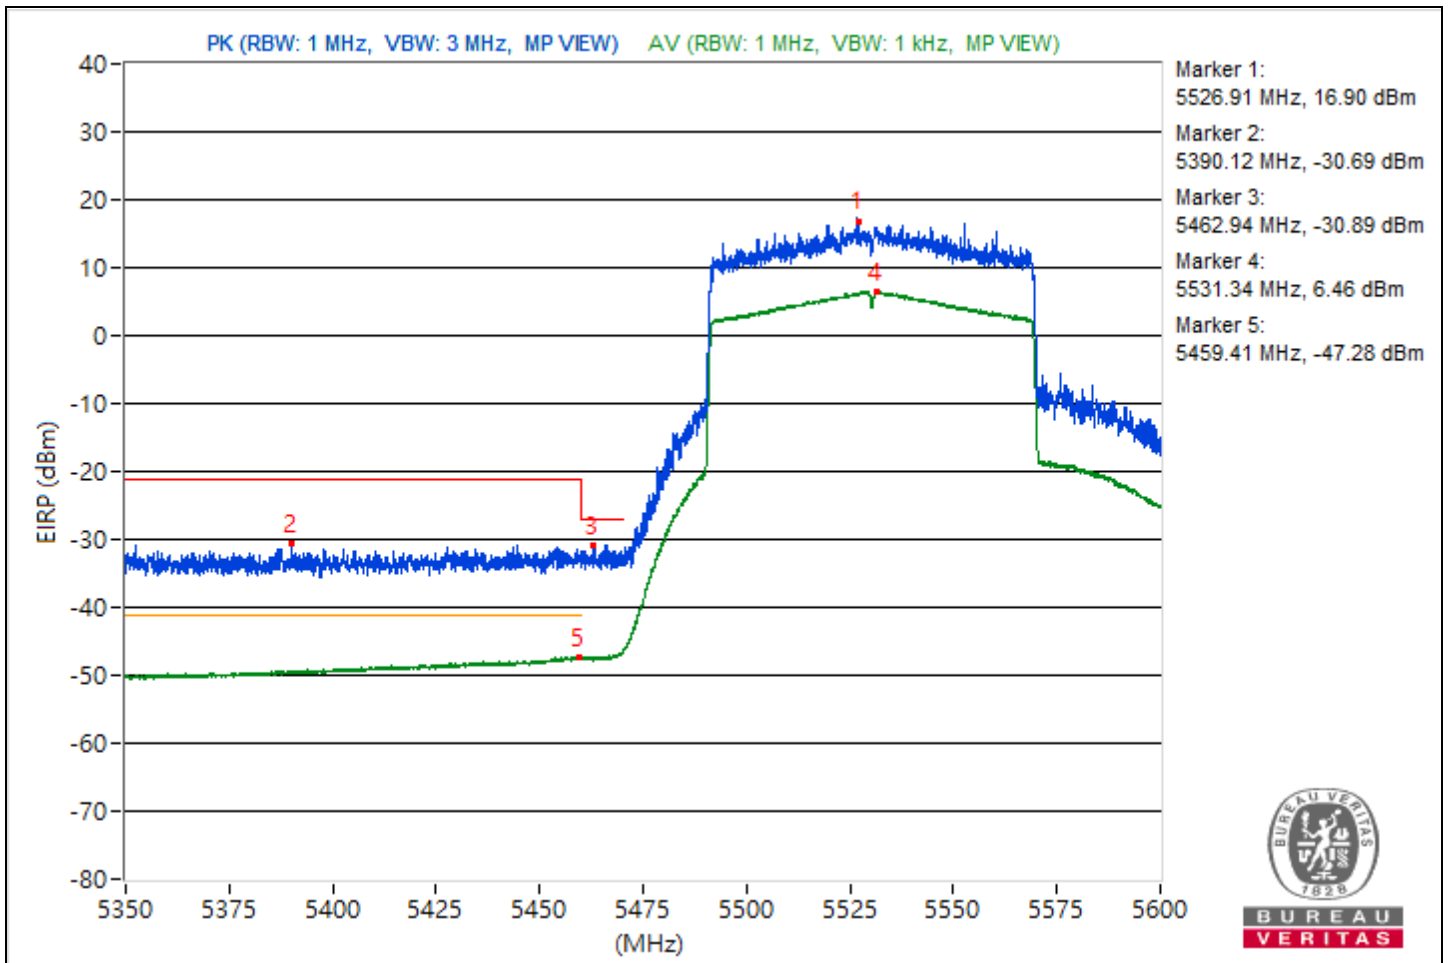


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5598.81	113.17 PK			10.02	9.94	4.92	17.91
2	5456.28	64.76 PK	74	-9.24	-37.42	-39.76	4.92	-30.5
3	#5462.25	65.05 PK	68.26	-3.21	-39.12	-37.33	4.92	-30.21
4	*5599.91	103.52 AV			0.27	0.39	4.92	8.26
5	5459.97	49.94 AV	54	-4.06	-54.05	-52.58	4.92	-45.32

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

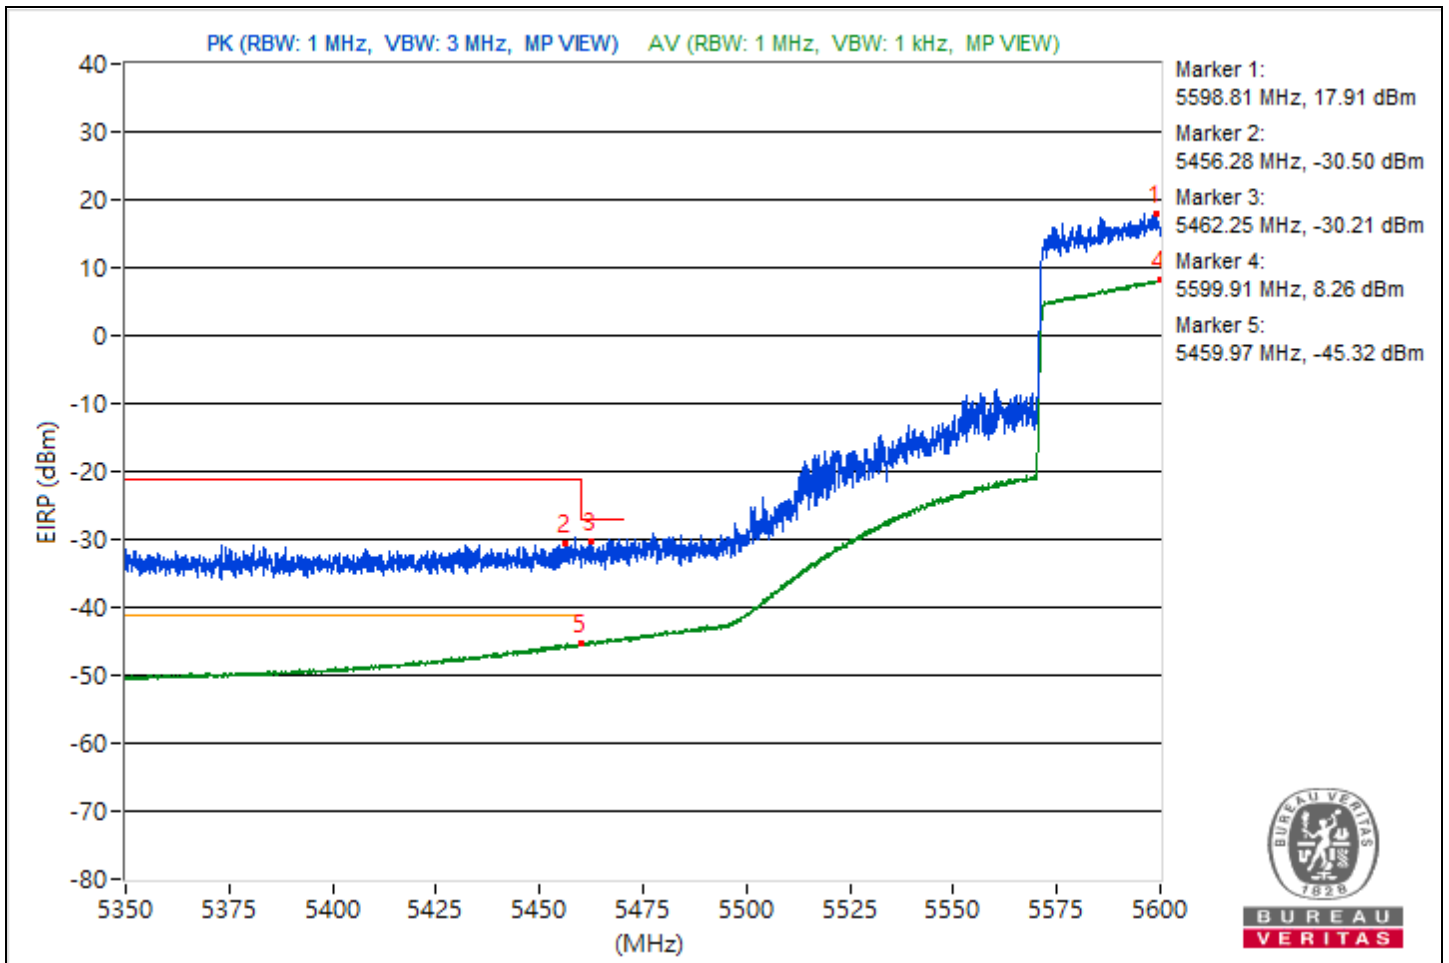


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.32	113.42			9	11.19	4.92	18.16
2	#5865.41	65.97	68.26	-2.29	-35.62	-39.77	4.92	-29.29

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

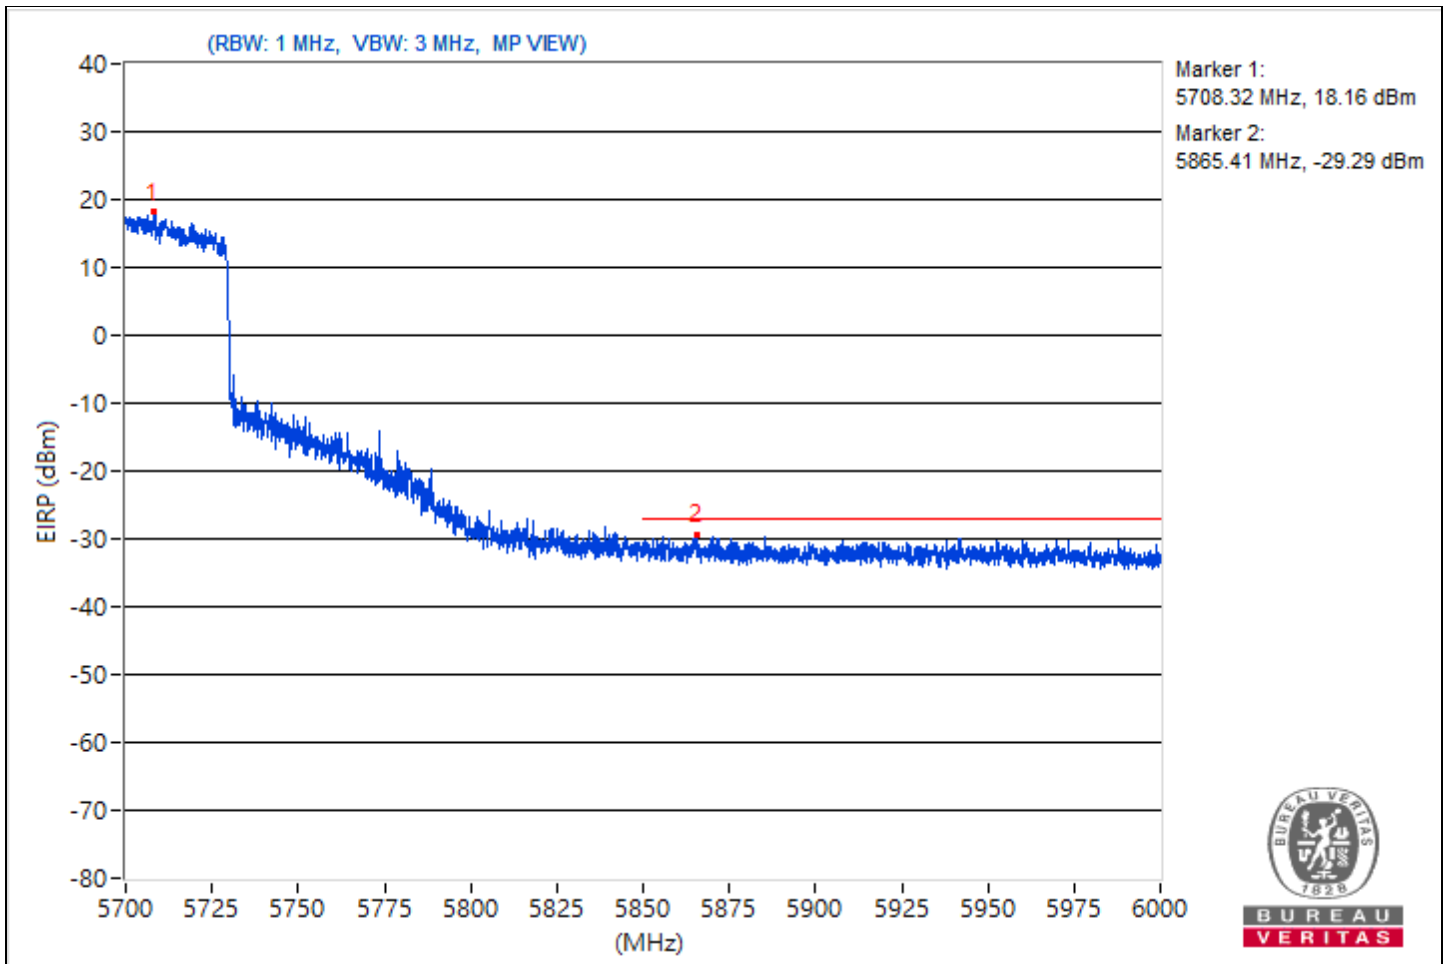


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5245.65	106.02 PK			1.01	4.1	4.92	10.76
2	*5248.37	96.05 AV			-7.12	-7.16	4.92	0.79
3	5135.5	67.05 PK	74	-6.95	-38.63	-34.57	4.92	-28.21
4	5127.62	49.62 AV	54	-4.38	-53.63	-53.52	4.92	-45.64

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

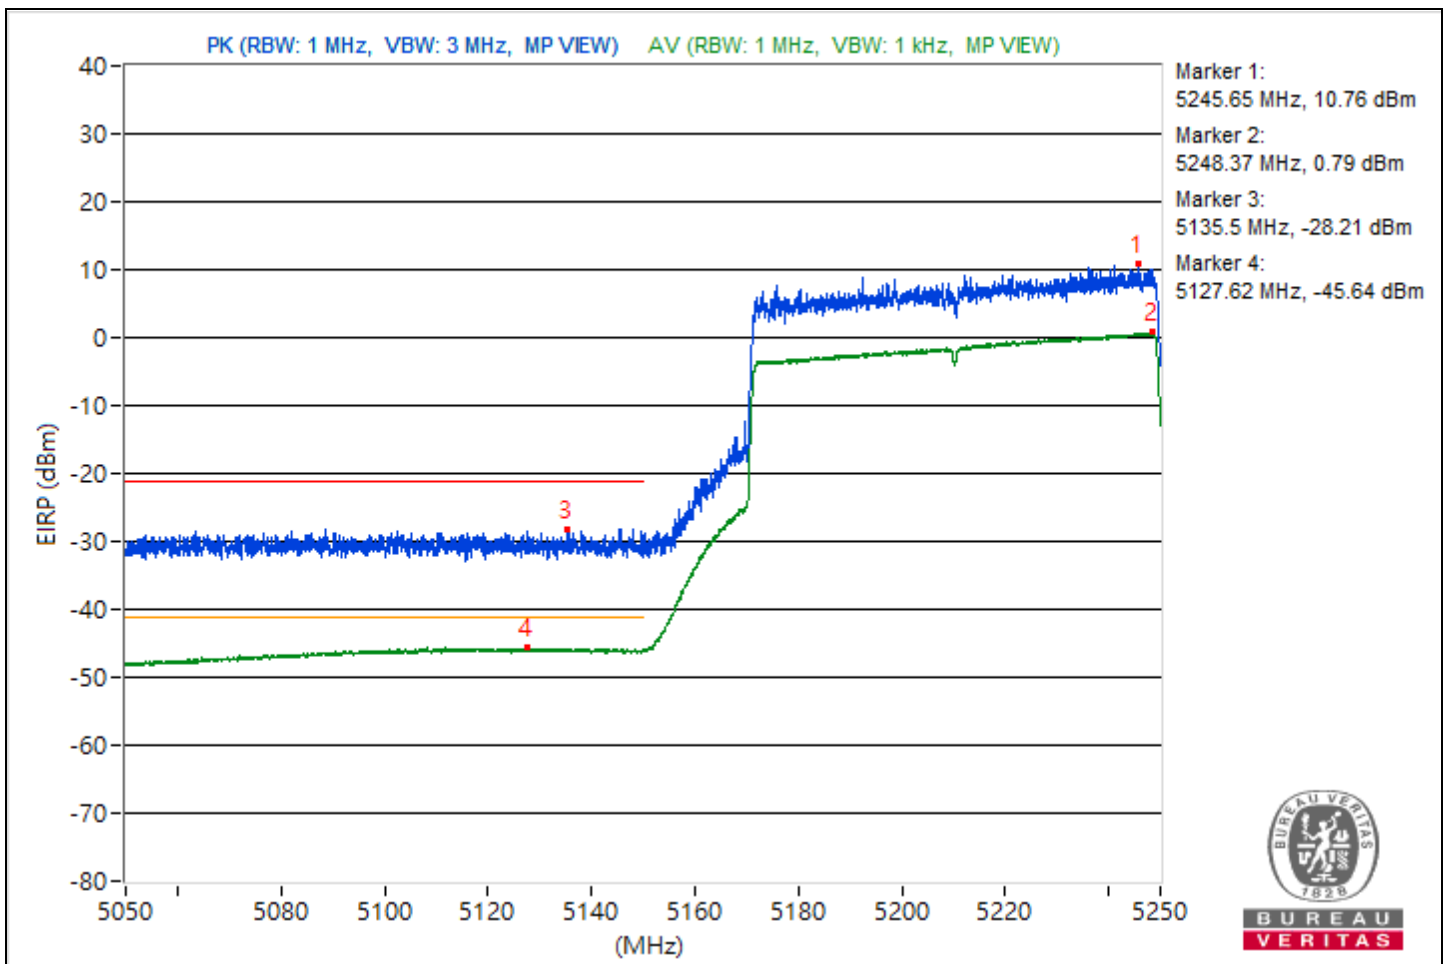


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5263.18	105.55 PK			-0.38	4.02	4.92	10.29
2	*5253.18	95.76 AV			-7.36	-7.5	4.92	0.5
3	5363.2	65.07 PK	74	-8.93	-36.47	-40.79	4.92	-30.19
4	5350.35	50.35 AV	54	-3.65	-52.63	-53.07	4.92	-44.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

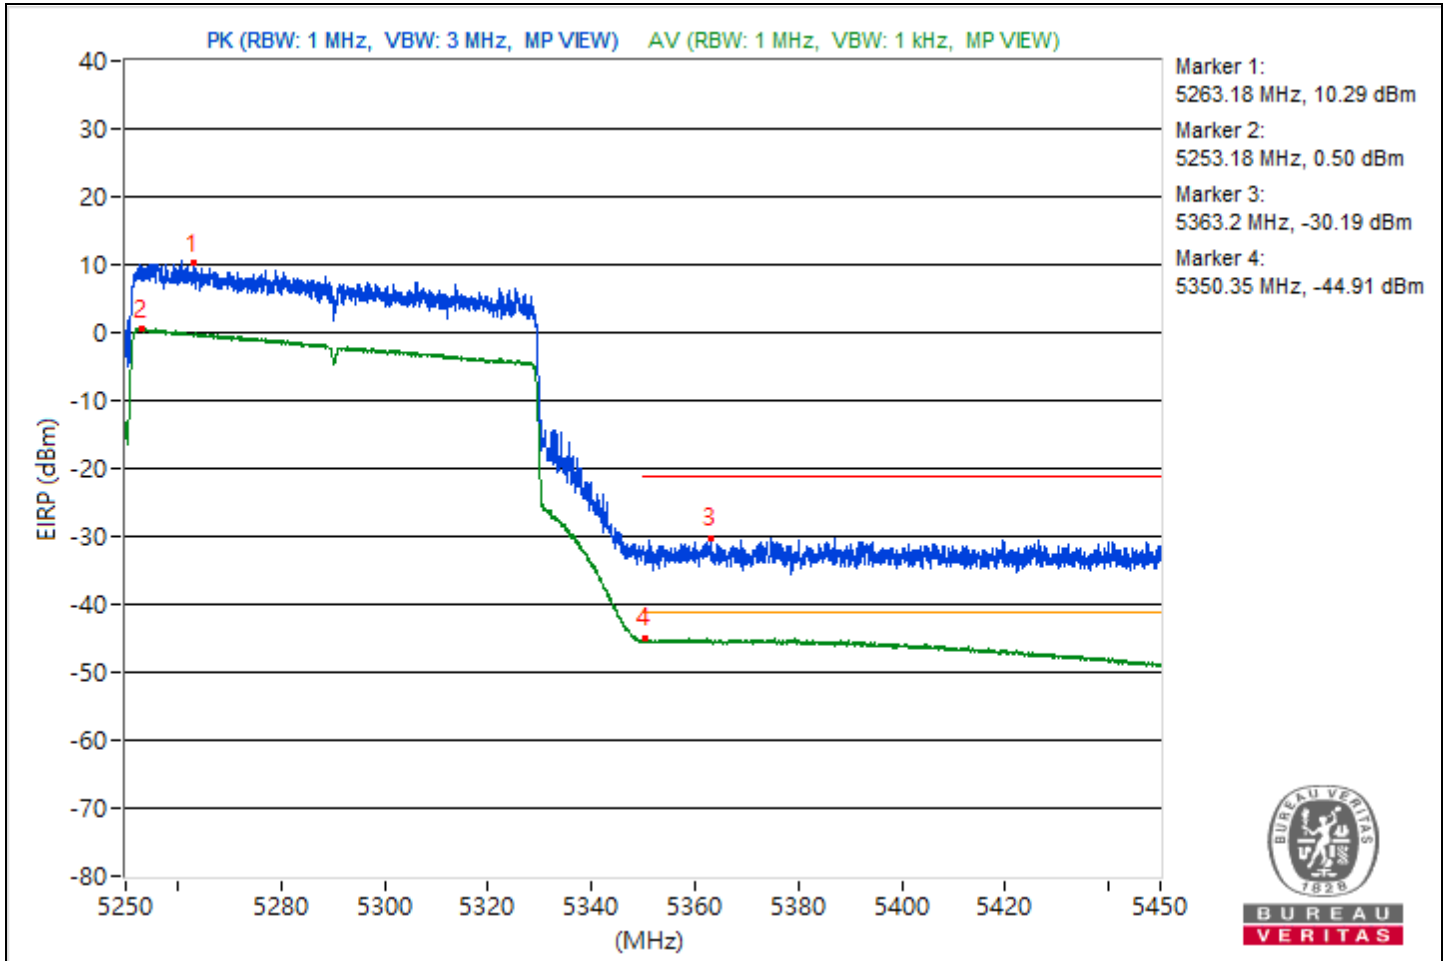


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	23°C, 63% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5589.12	106.97 PK			0.48	5.63	4.92	11.71
2	5447.53	64.86 PK	74	-9.14	-36.95	-40.39	4.92	-30.4
3	#5461.81	64.59 PK	68.26	-3.67	-39.63	-37.77	4.92	-30.67
4	*5568.34	97.65 AV			-5.41	-5.68	4.92	2.39
5	5454.91	49.45 AV	54	-4.55	-53.38	-54.14	4.92	-45.81

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

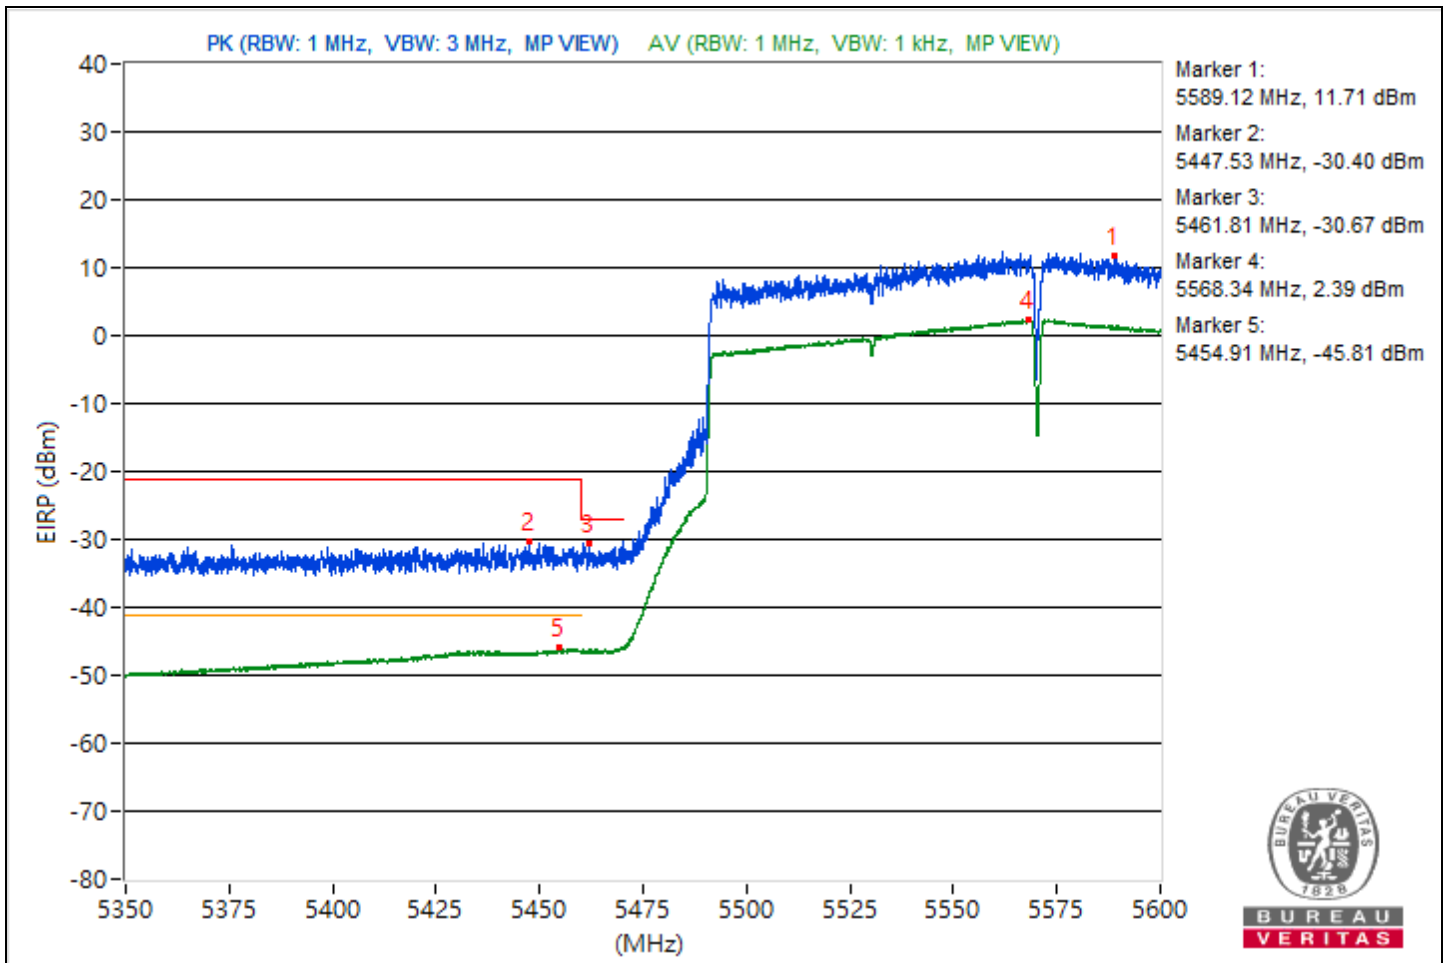


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5329.4	118.51 PK			16.36	13.94	4.92	23.25
2	*5328.87	109.29 AV			6.16	6.04	4.92	14.03
3	5378.93	64.13 PK	74	-9.87	-37.55	-41.39	4.92	-31.13
4	5361.4	44.71 AV	54	-9.29	-58.21	-58.76	4.92	-50.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

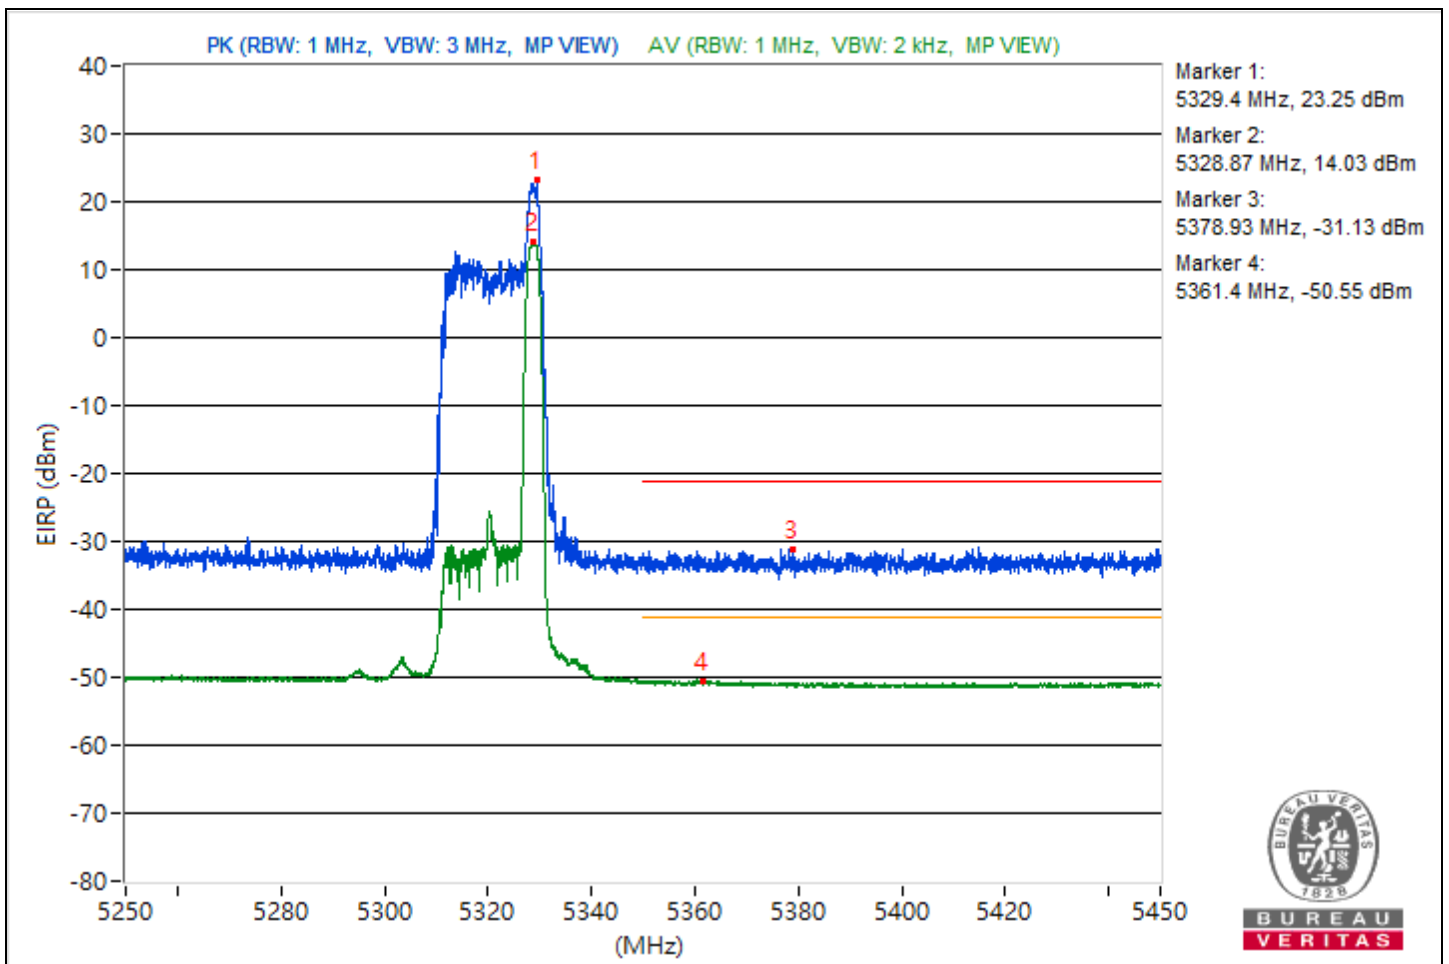


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5491.53	119.93 PK			18.34	14.17	4.92	24.67
2	5443.56	64.5 PK	74	-9.5	-41.69	-36.93	4.92	-30.76
3	#5469.19	64.14 PK	68.26	-4.12	-40.69	-37.86	4.92	-31.12
4	*5491.72	110.06 AV			7.06	6.66	4.92	14.8
5	5456.72	44.9 AV	54	-9.1	-58.07	-58.51	4.92	-50.36

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

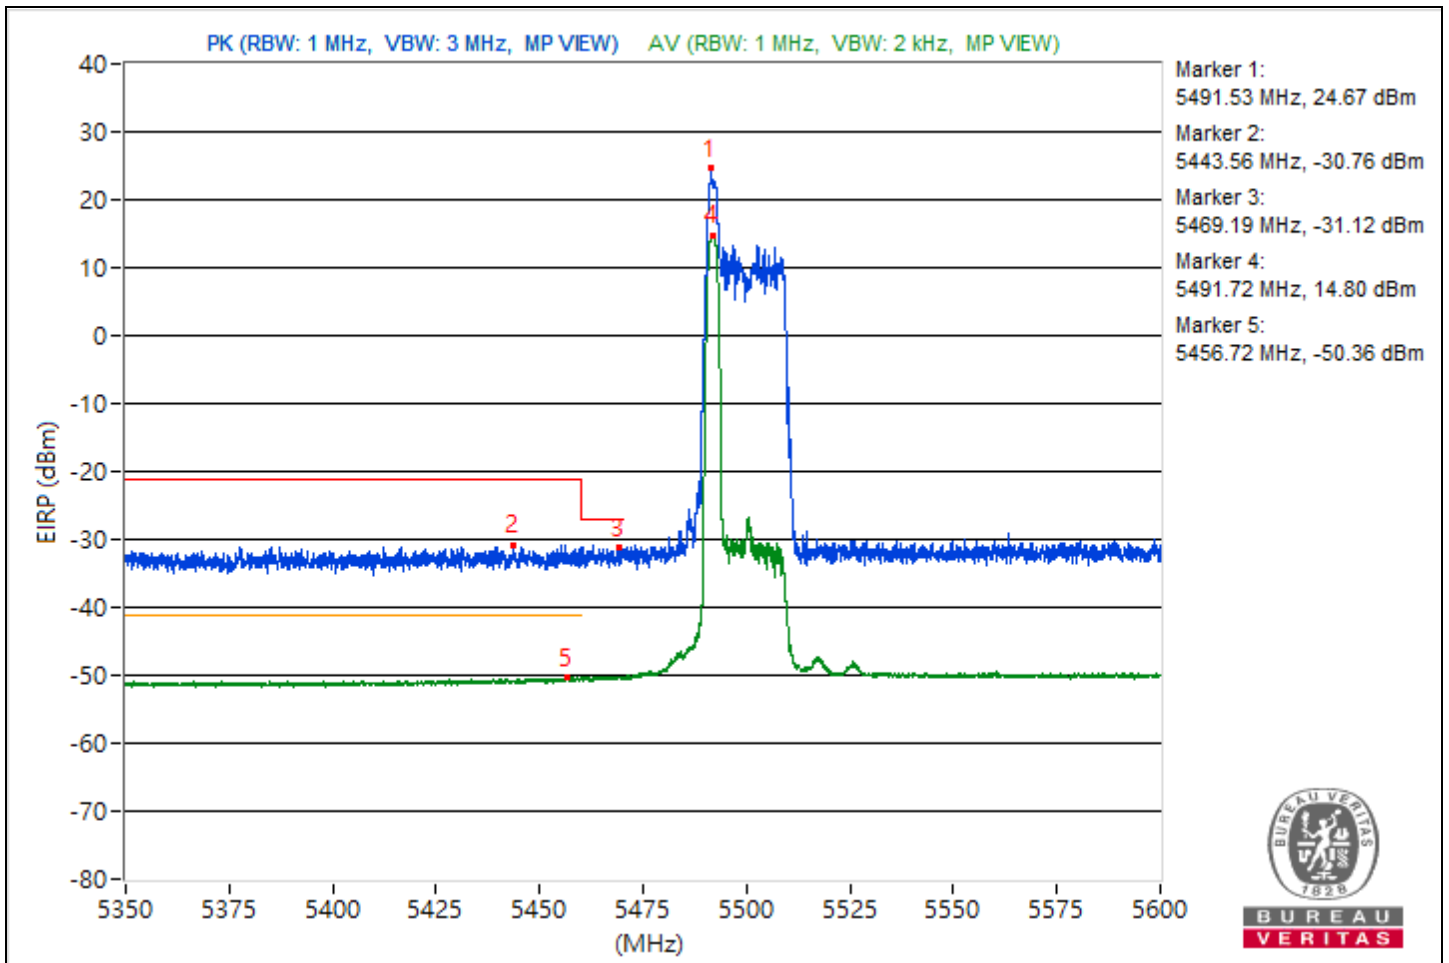

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.93	119.72			16.37	16.69	4.92	24.46
2	#5788.43	65.16	68.26	-3.1	-39.41	-36.98	4.92	-30.1


- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

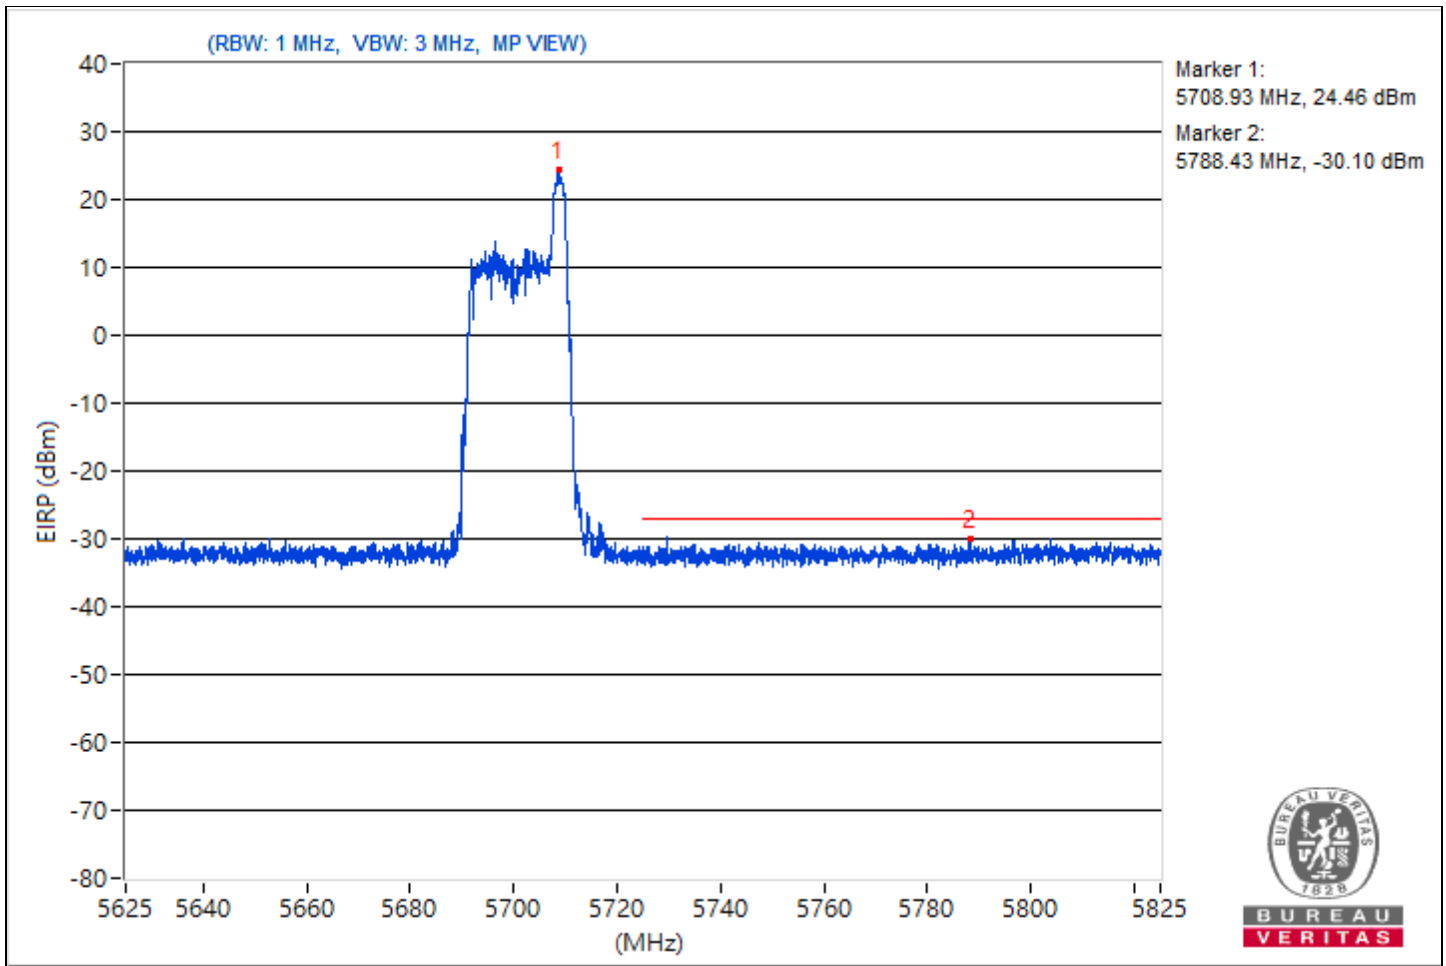

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5728.57	118.98			15.78	15.79	4.92	23.72
2	#5861.02	65.23	68.26	-3.03	-36.61	-39.92	4.92	-30.03

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

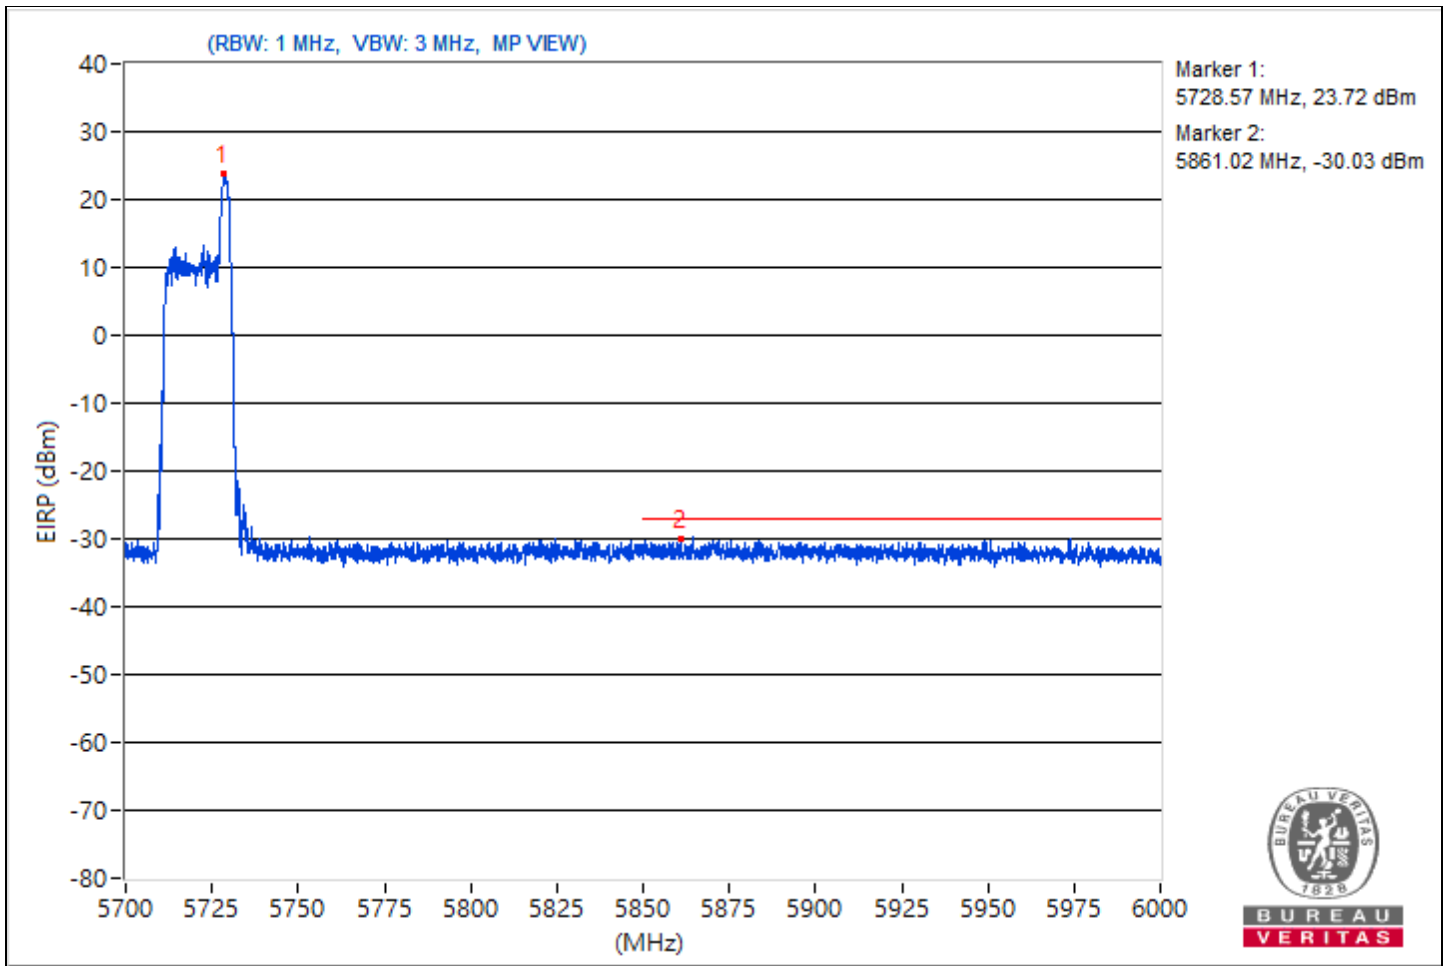


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5328.5	120.68 PK			18.22	16.61	4.92	25.42
2	*5328.25	109.75 AV			6.36	6.76	4.92	14.49
3	5395.48	64.2 PK	74	-9.8	-41.11	-37.57	4.92	-31.06
4	5350.5	46.52 AV	54	-7.48	-56.64	-56.7	4.92	-48.74

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

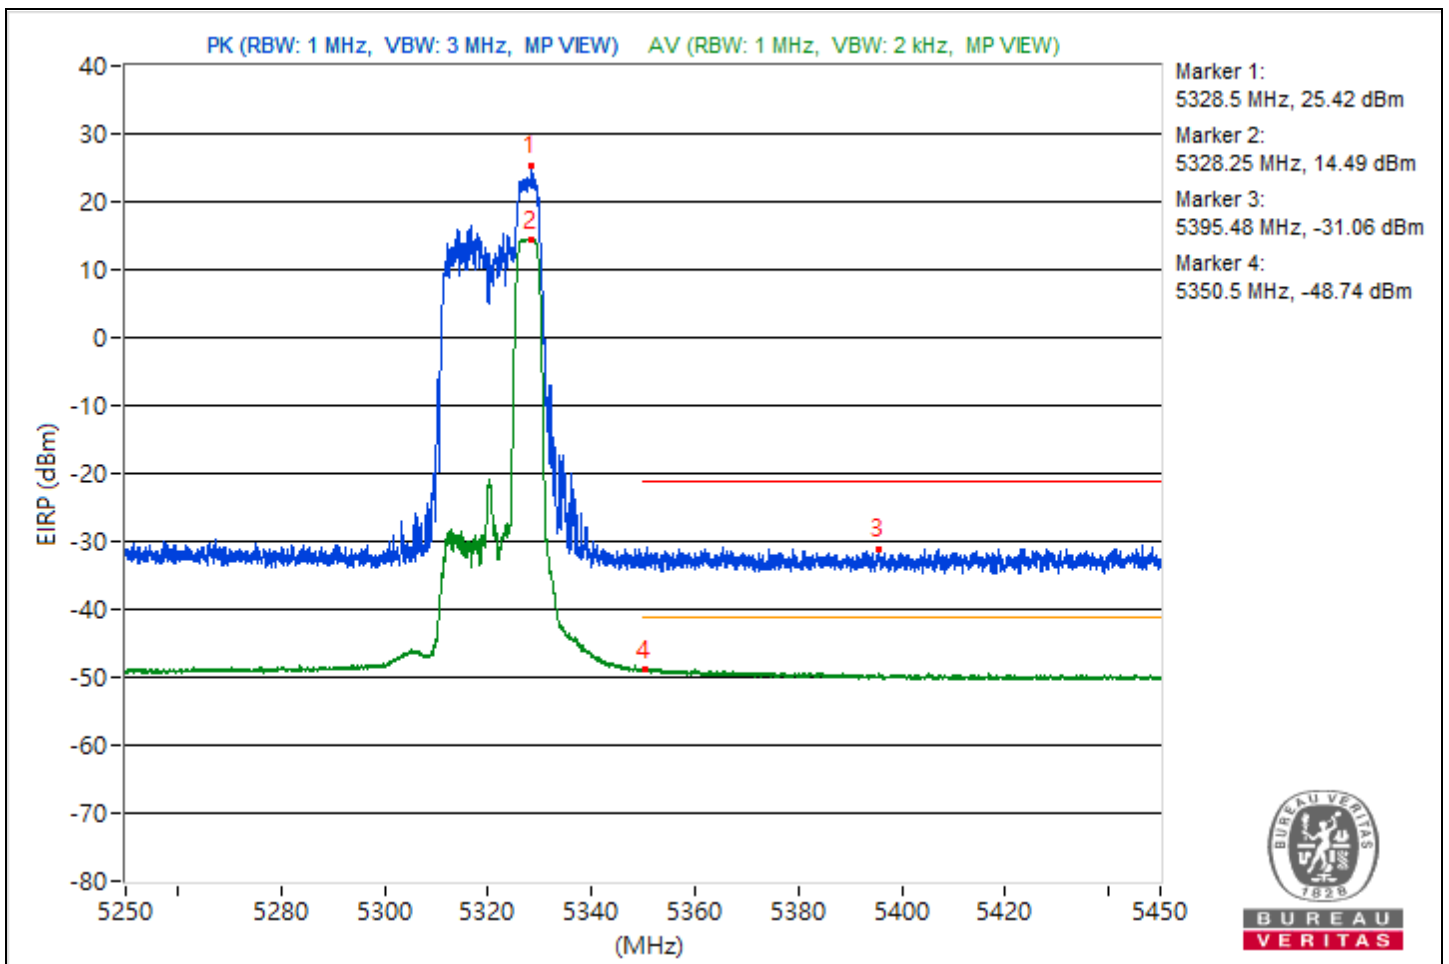


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5493.34	120.08 PK			16.81	16.96	4.92	24.82
2	5455.78	64.74 PK	74	-9.26	-40.14	-37.24	4.92	-30.52
3	#5465.09	64.93 PK	68.26	-3.33	-39.14	-37.53	4.92	-30.33
4	*5493.22	109.81 AV			6.82	6.42	4.92	14.55
5	5453.91	46.32 AV	54	-7.68	-56.6	-57.15	4.92	-48.94

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

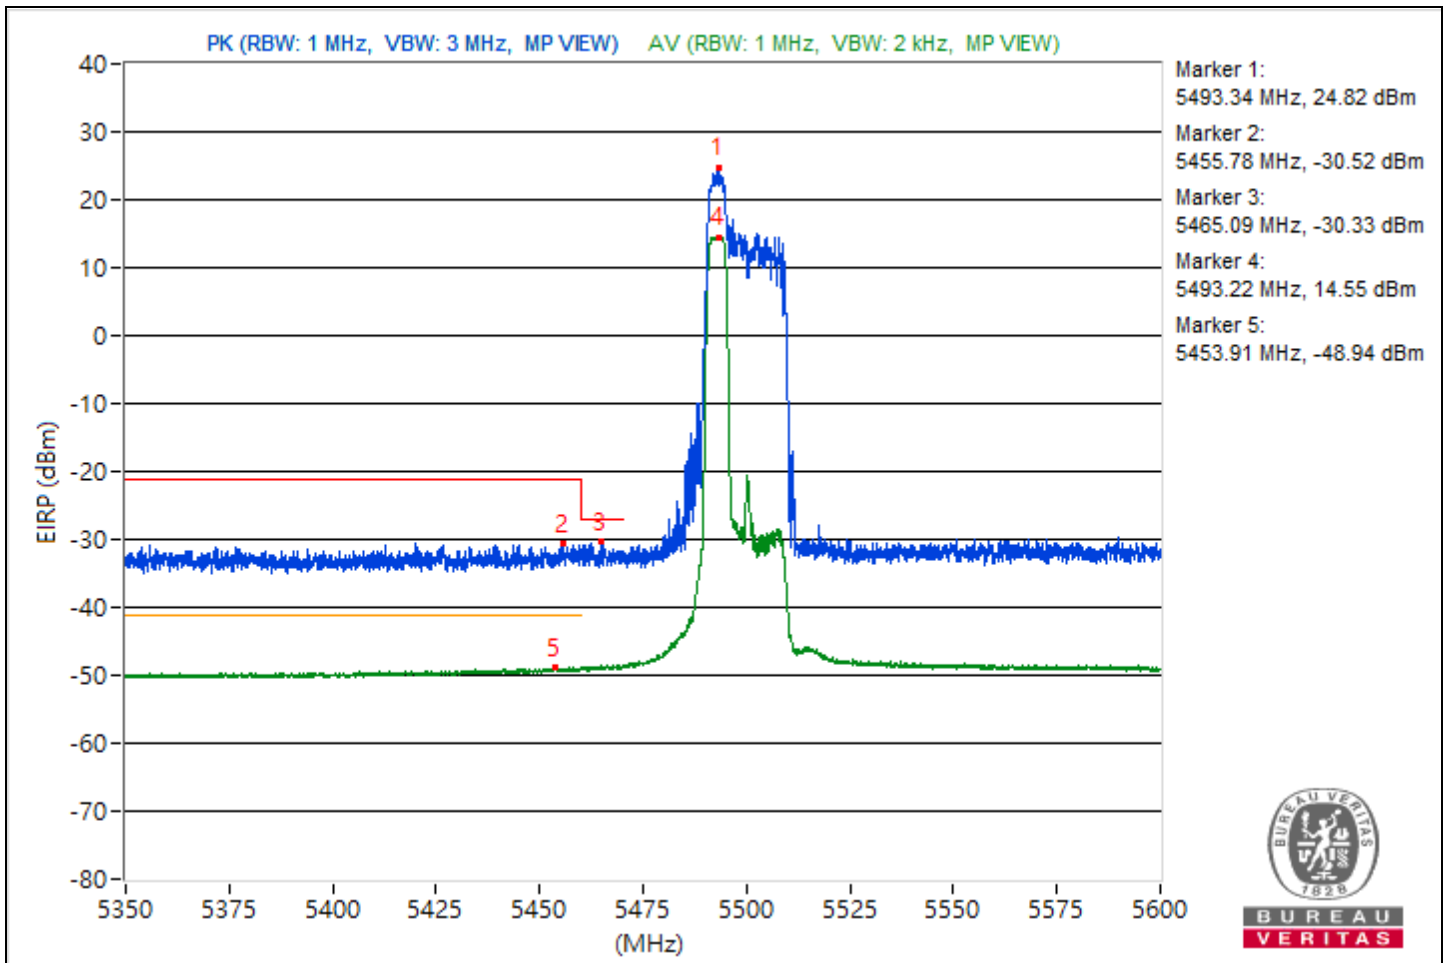

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5708.43	119.31			14.92	17.06	4.92	24.05
2	#5786.05	65.03	68.26	-3.23	-40.26	-36.74	4.92	-30.23


- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

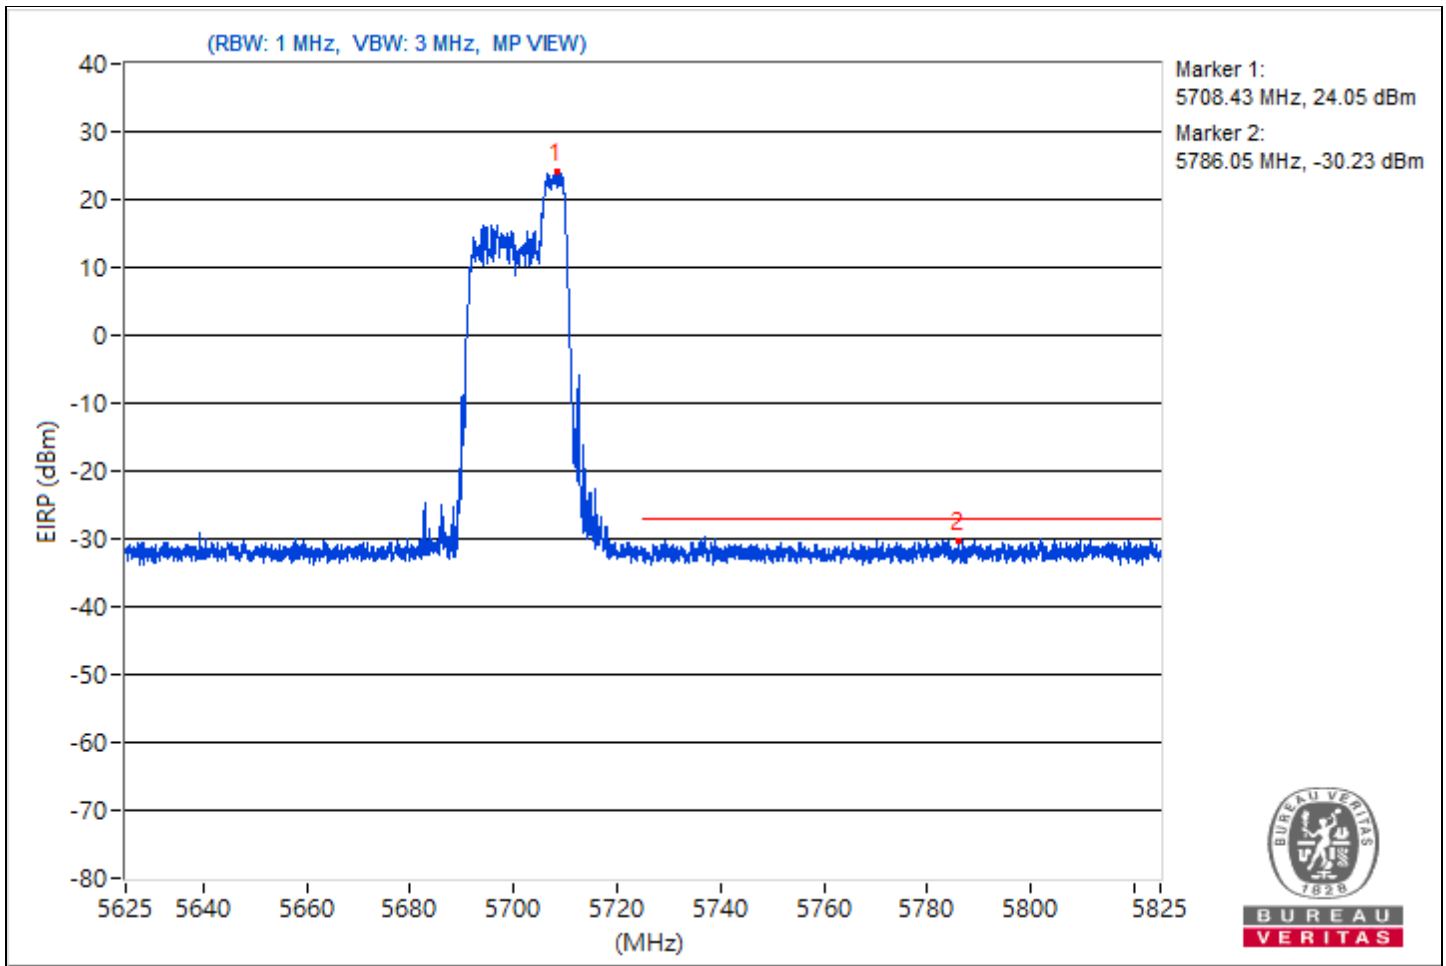

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5727.15	119.42			17.05	15.22	4.92	24.16
2	#5978.96	65.02	68.26	-3.24	-36.4	-41.2	4.92	-30.24

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

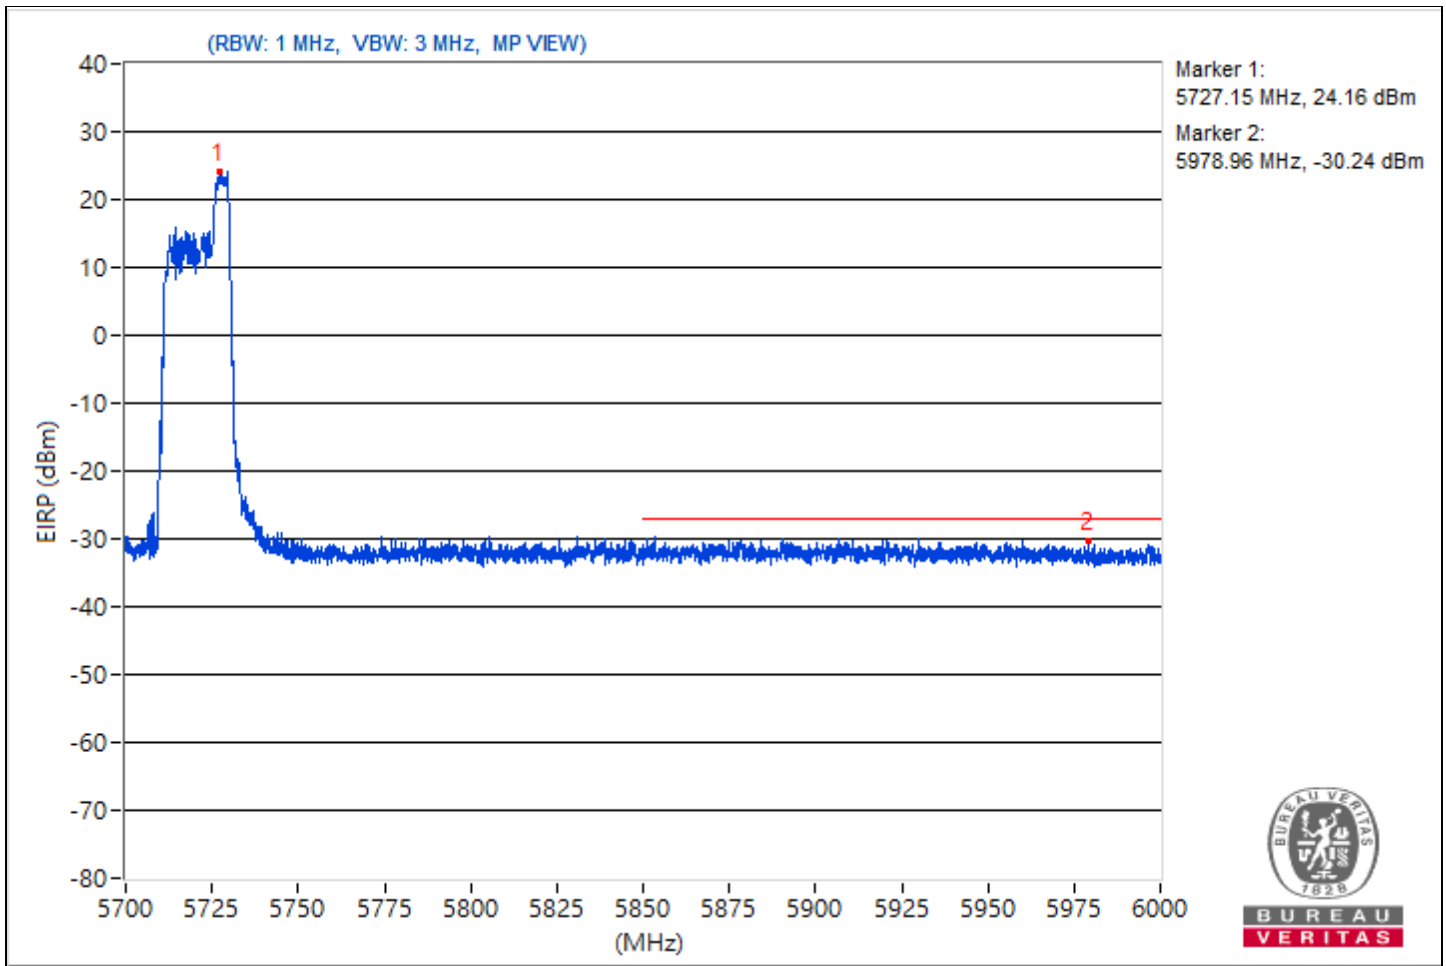


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5326.5	120.23 PK			17.67	16.29	4.92	24.97
2	*5326.9	109.75 AV			6.44	6.67	4.92	14.49
3	5350.15	64.76 PK	74	-9.24	-36.81	-41.04	4.92	-30.5
4	5350	48.35 AV	54	-5.65	-54.68	-54.99	4.92	-46.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

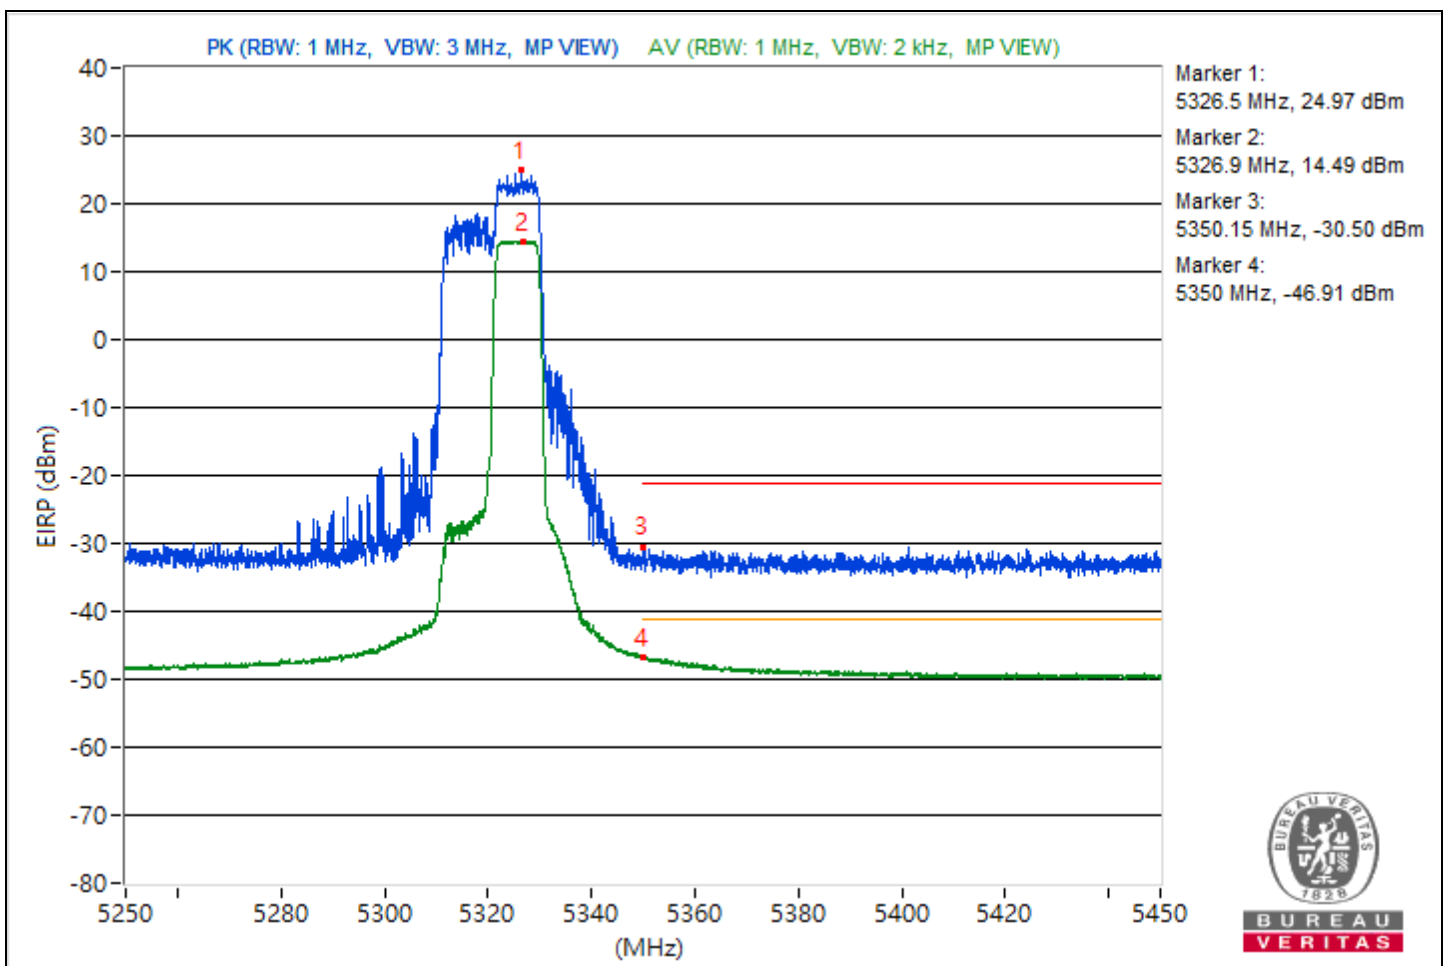


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5497.06	119.64 PK			15.67	17.11	4.92	24.38
2	5434.97	64.76 PK	74	-9.24	-36.96	-40.66	4.92	-30.5
3	#5466.78	65.02 PK	68.26	-3.24	-37.63	-38.79	4.92	-30.24
4	*5496.47	109.72 AV			6.8	6.25	4.92	14.46
5	5458.78	47.49 AV	54	-6.51	-56.17	-55.28	4.92	-47.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

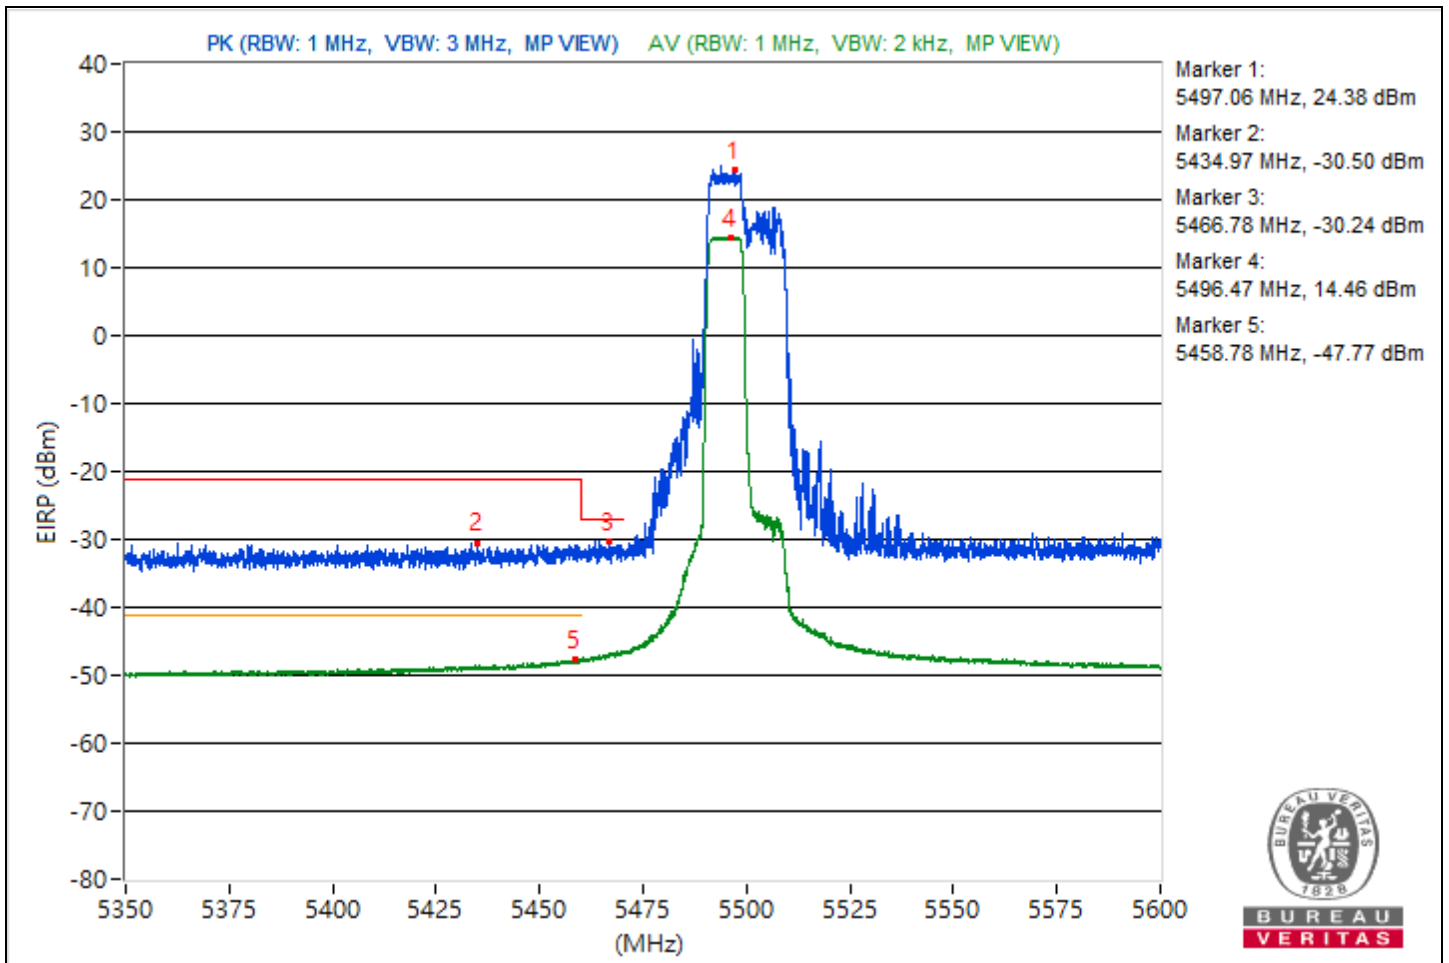


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5707.12	119.58			14.4	17.75	4.92	24.32
2	#5742.65	65.51	68.26	-2.75	-39.74	-36.29	4.92	-29.75

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

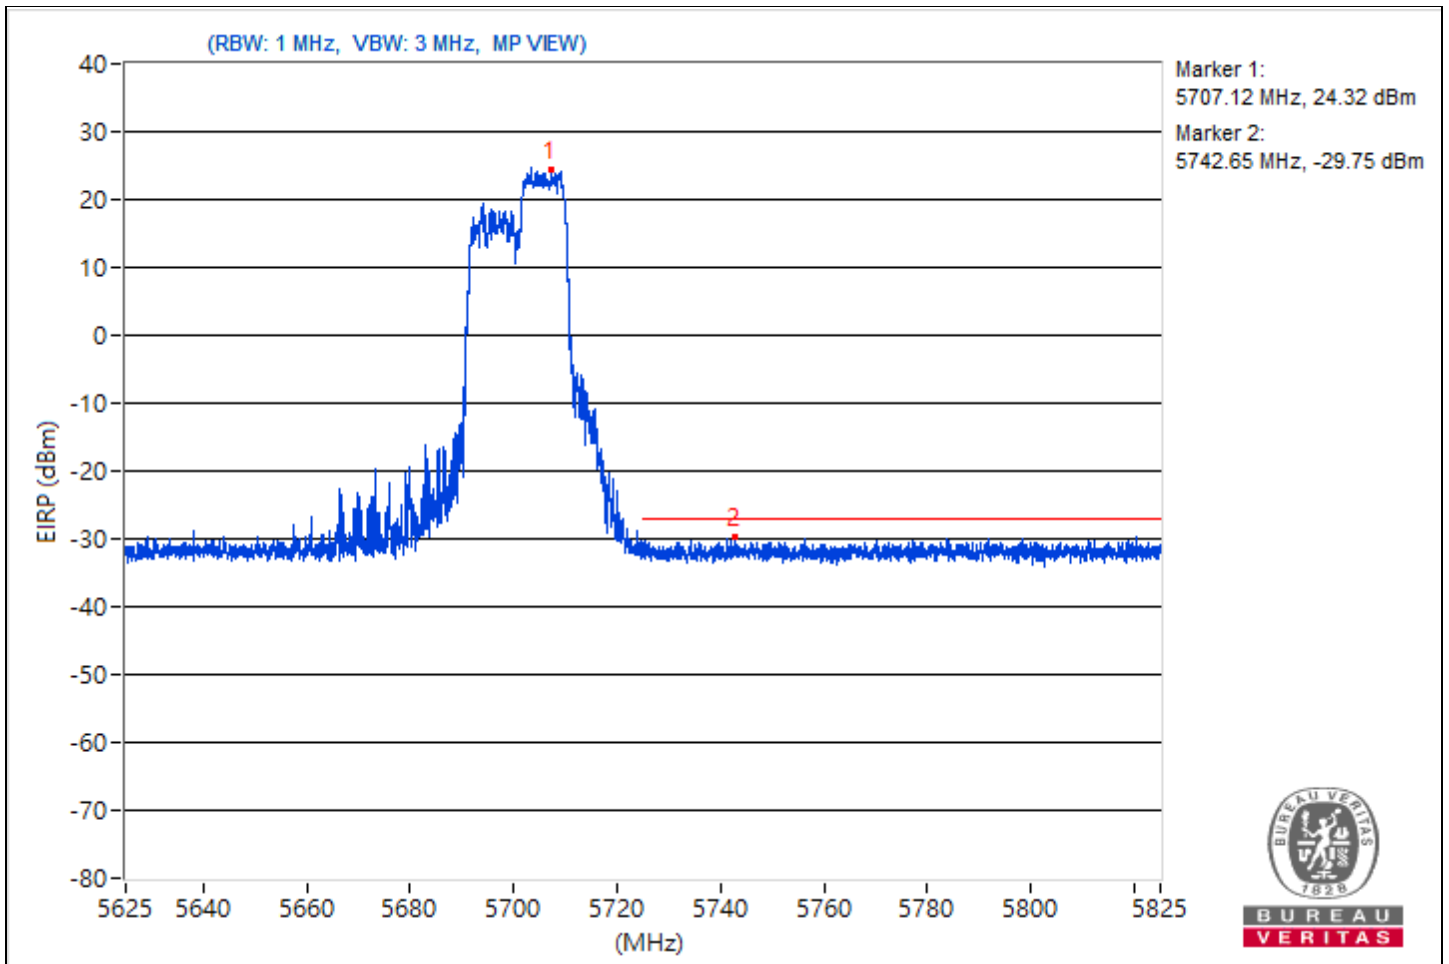

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5725.46	118.9			13.48	17.18	4.92	23.64
2	#5871.23	66.25	68.26	-2.01	-35.87	-38.38	4.92	-29.01

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
 3. " # ": The radiated frequency is out of the restricted band.

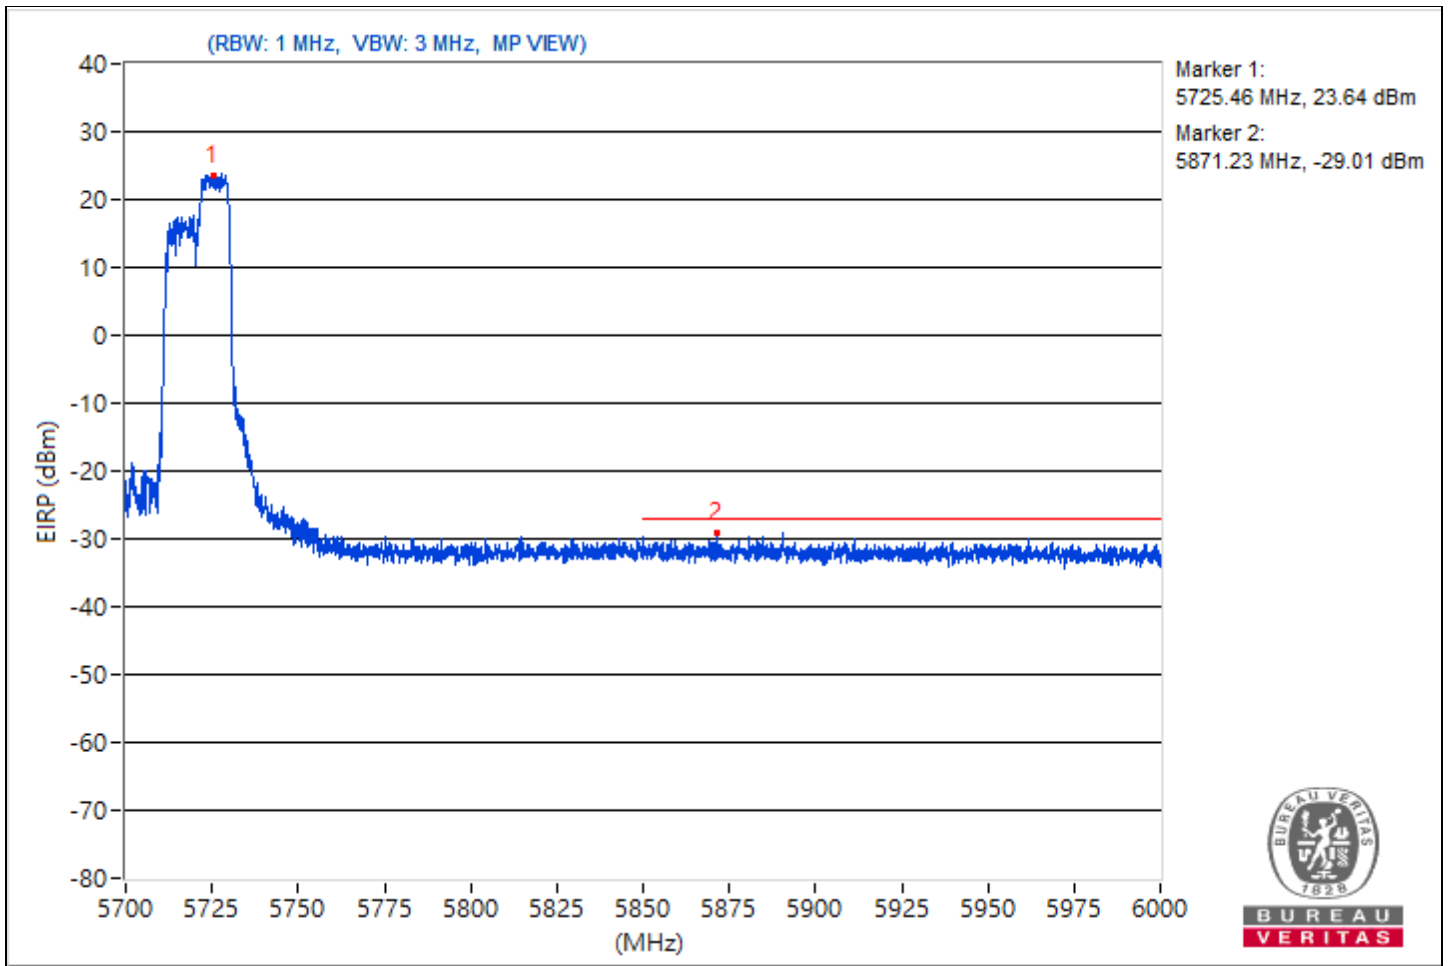


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5325.4	119.04 PK			14.12	17.09	4.92	23.78
2	*5324.45	109.5 AV			6.45	6.16	4.92	14.24
3	5449.3	64.94 PK	74	-9.06	-39.29	-37.42	4.92	-30.32
4	5350.35	46.91 AV	54	-7.09	-55.81	-56.81	4.92	-48.35

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

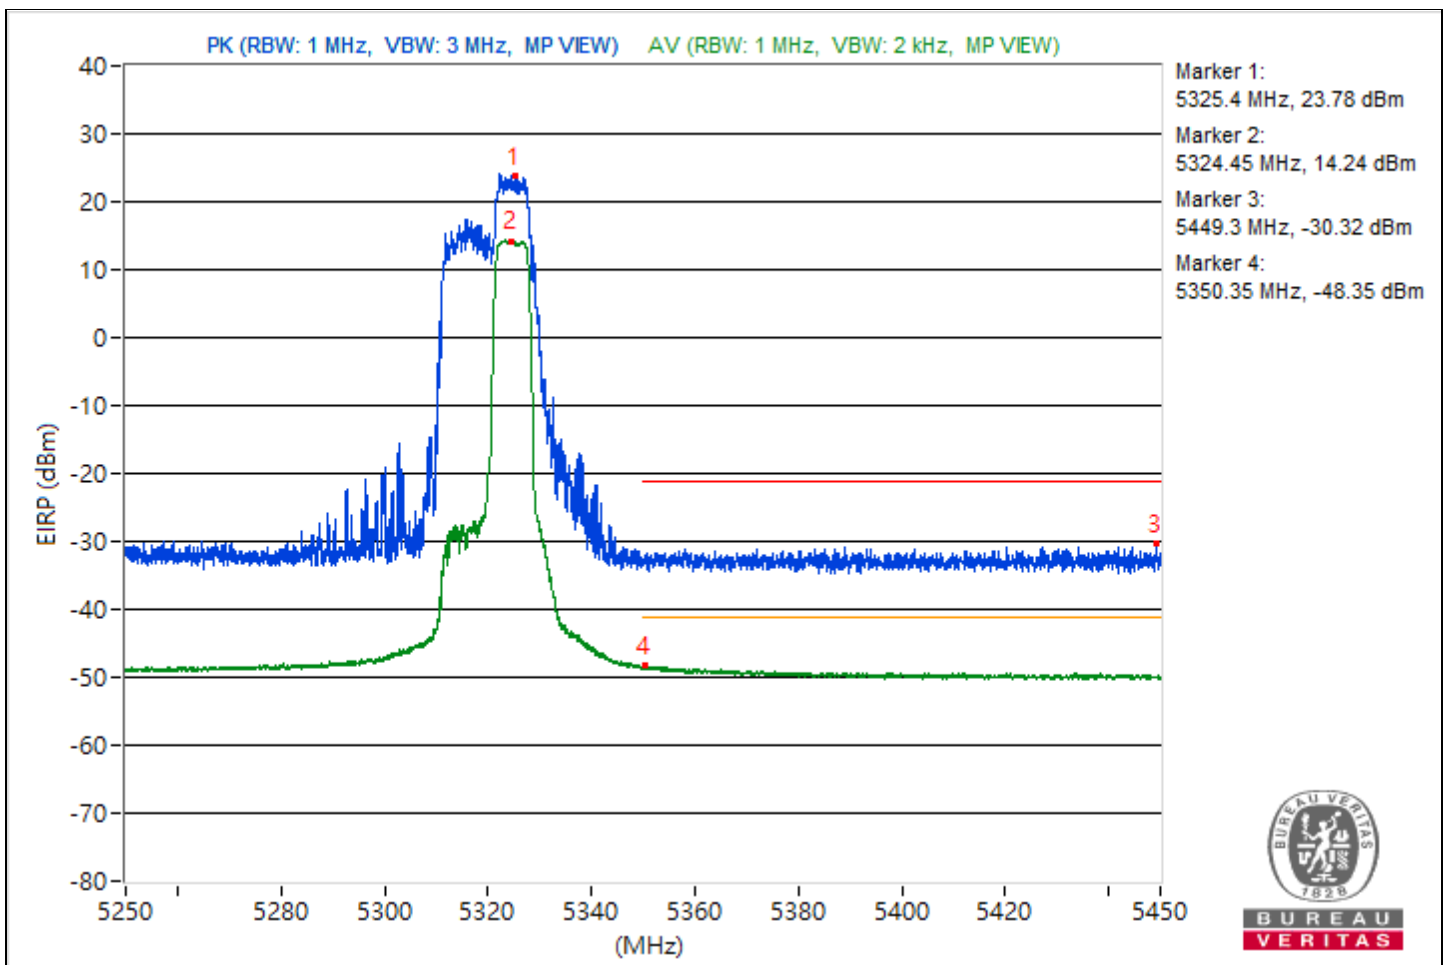


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.28	119.91 PK			14.66	18.11	4.92	24.65
2	5350.34	64.75 PK	74	-9.25	-39.7	-37.47	4.92	-30.51
3	#5461.22	64.74 PK	68.26	-3.52	-36.73	-41.35	4.92	-30.52
4	*5497.22	109.71 AV			6.73	6.3	4.92	14.45
5	5459.25	46.85 AV	54	-7.15	-56.22	-56.47	4.92	-48.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

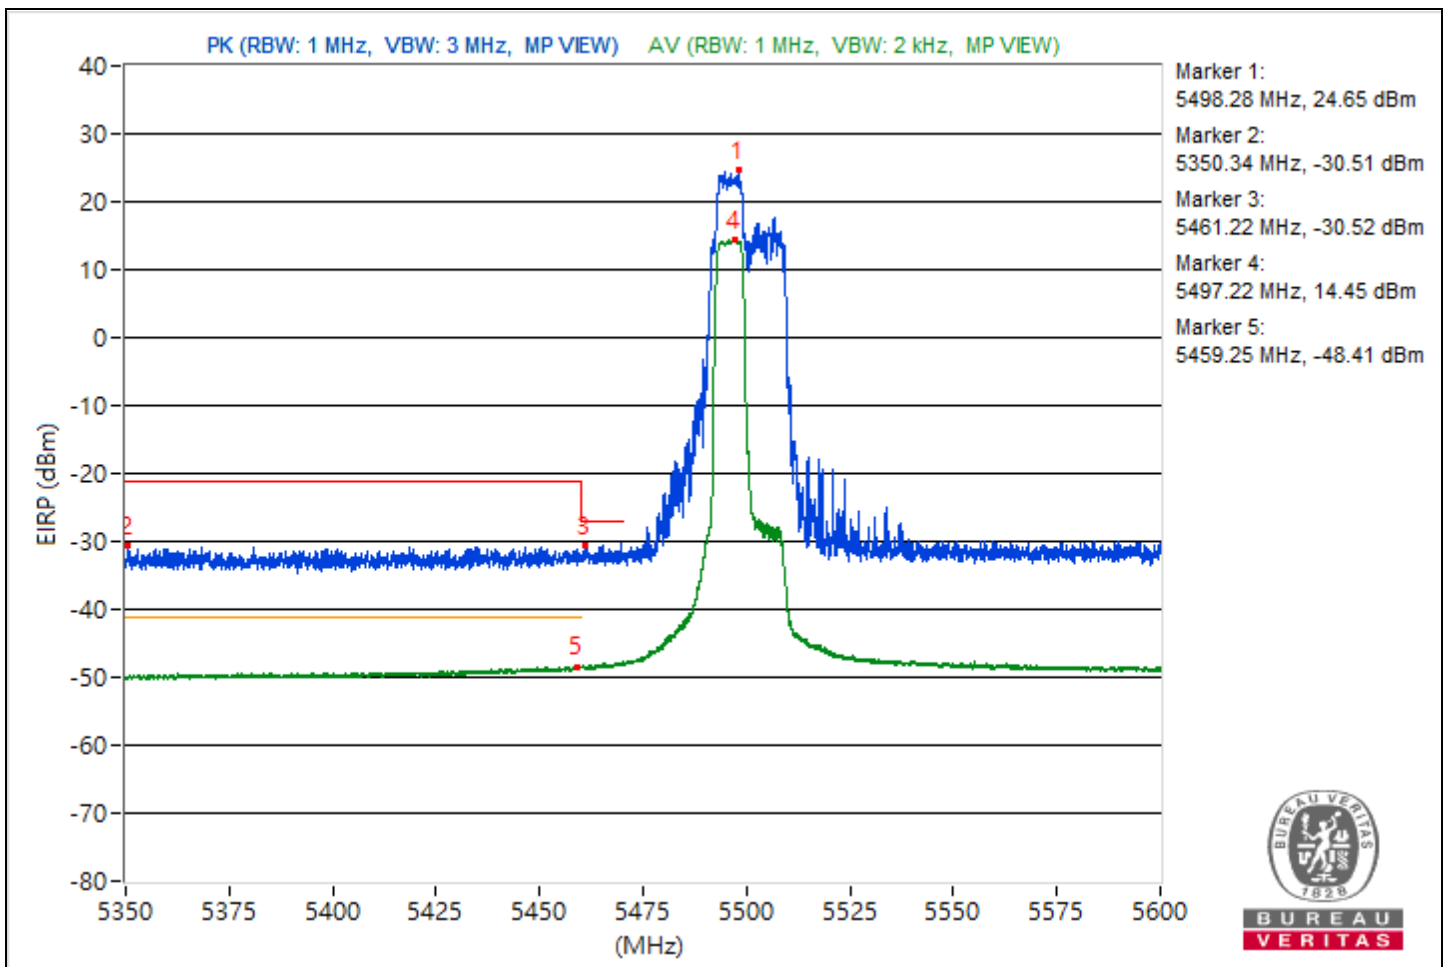


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5707.3	120.67			18.65	15.88	4.92	25.41
2	#5777.1	65.99	68.26	-2.27	-35.8	-39.29	4.92	-29.27

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

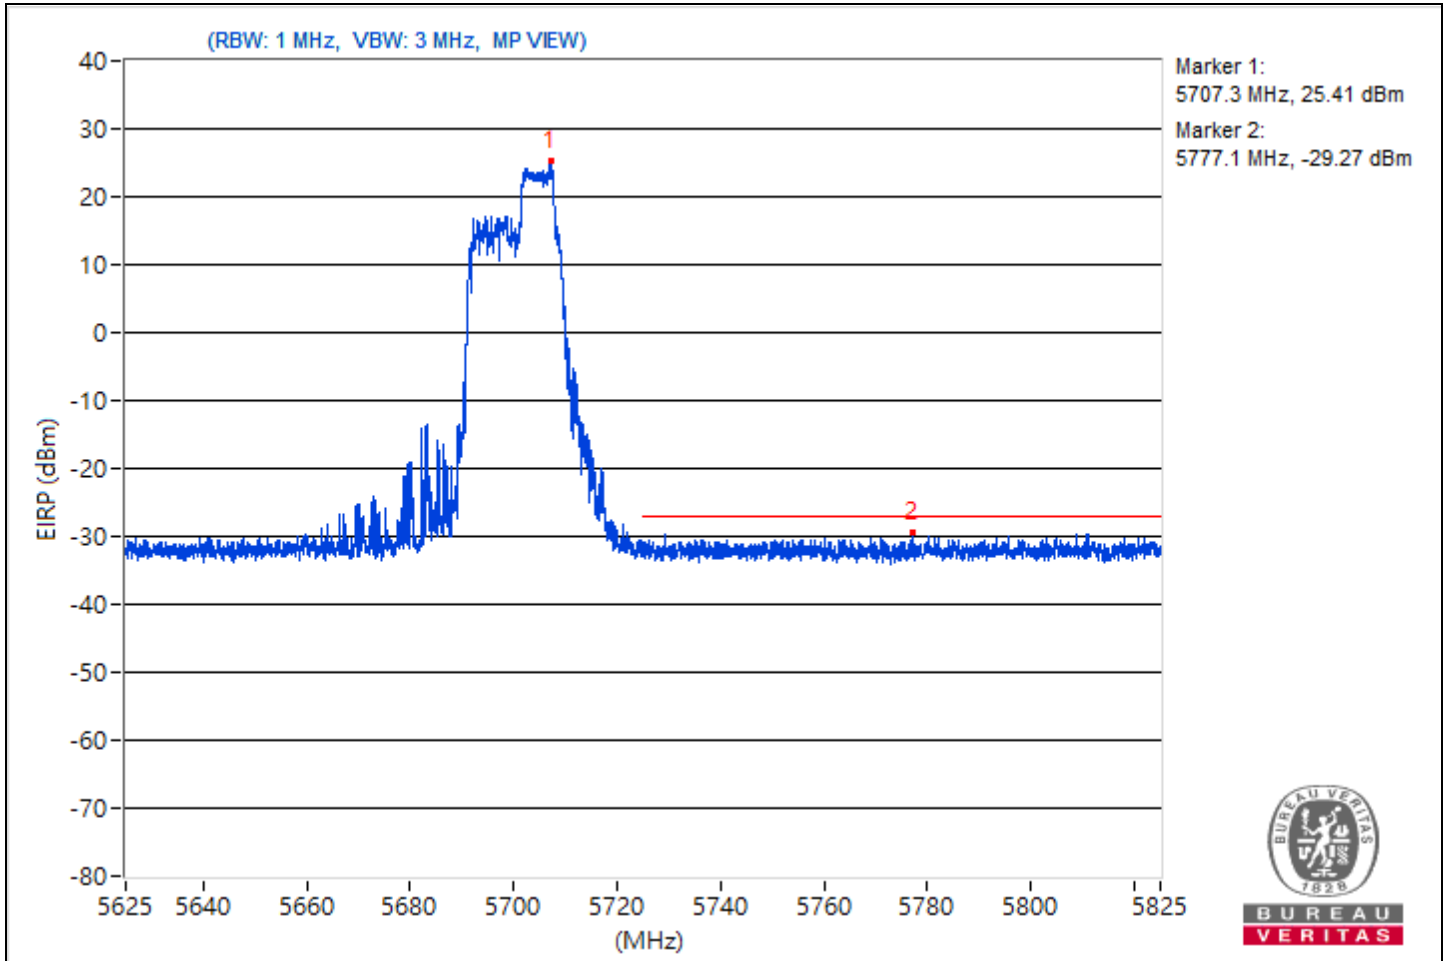


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5723.4	119.34			14.08	17.55	4.92	24.08
2	#5938.43	65.73	68.26	-2.53	-38.61	-36.56	4.92	-29.53

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

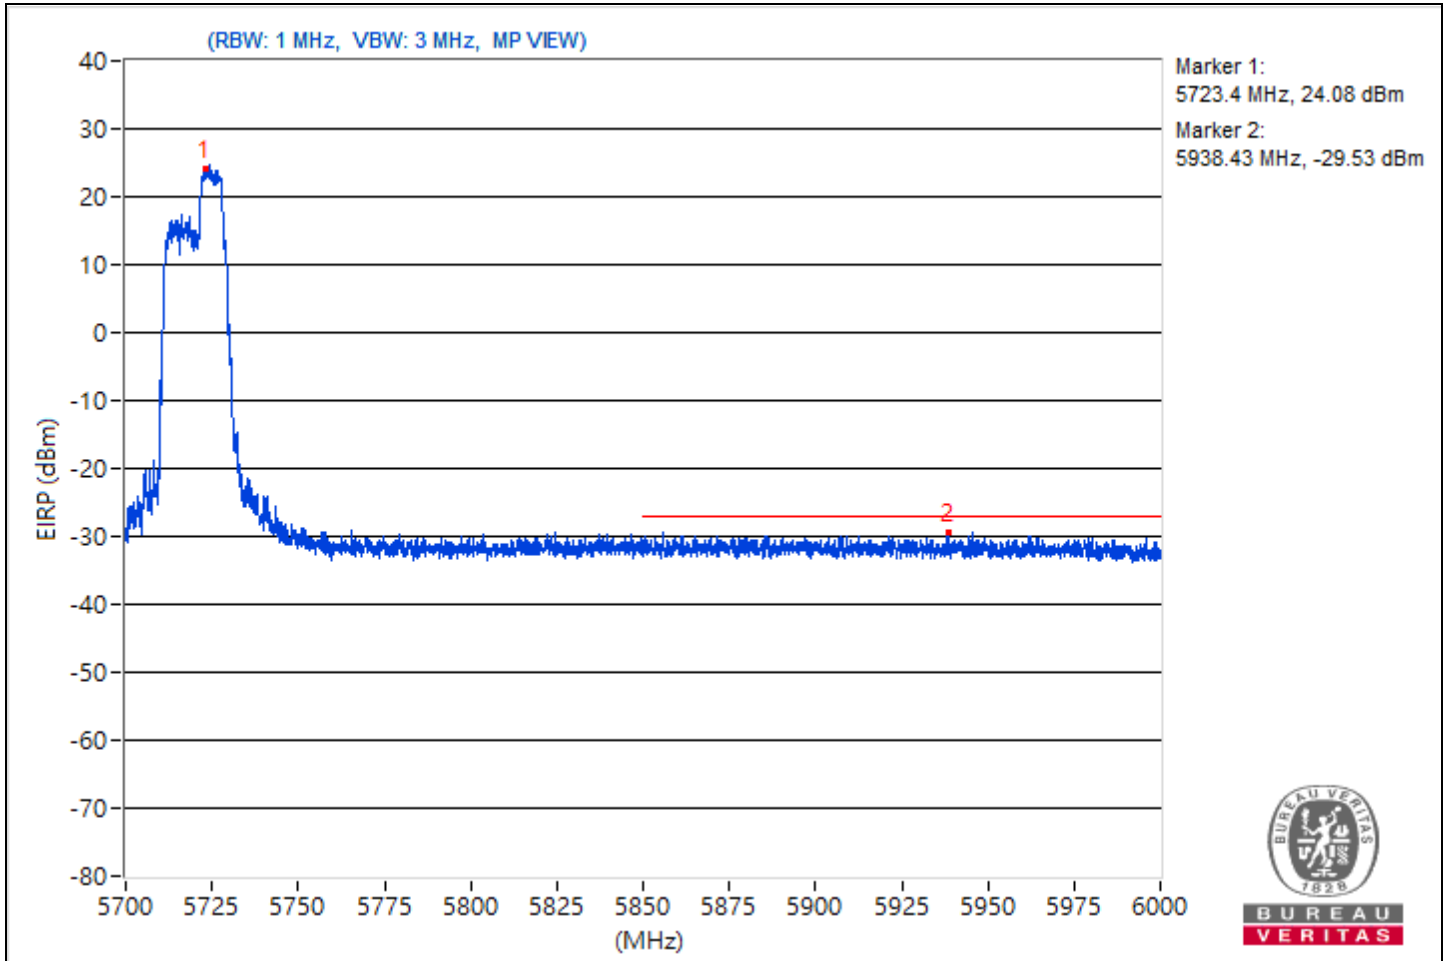


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5321.82	118.88 PK			14.94	16.33	4.92	23.62
2	*5321.77	109.19 AV			6.33	5.65	4.92	13.93
3	5440.68	65.04 PK	74	-8.96	-40.45	-36.66	4.92	-30.22
4	5350.2	47.85 AV	54	-6.15	-54.9	-55.83	4.92	-47.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

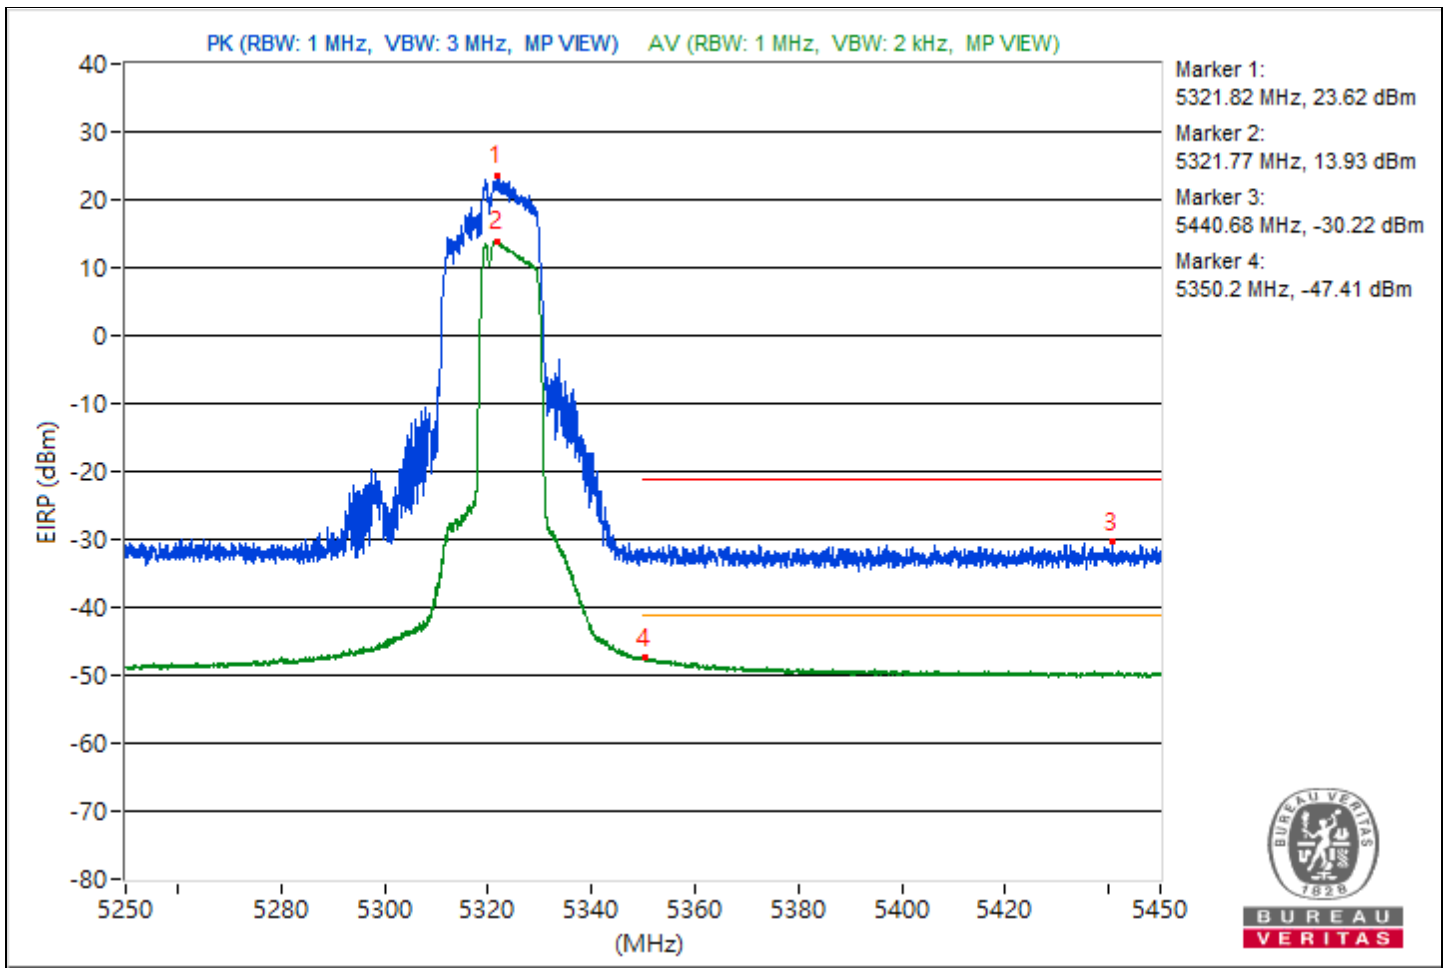


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5498.25	120.24 PK			16.92	17.18	4.92	24.98
2	5433.69	65.53 PK	74	-8.47	-39.06	-36.6	4.92	-29.73
3	#5469.59	64.6 PK	68.26	-3.66	-40.68	-37.19	4.92	-30.66
4	*5499.31	109.77 AV			6.8	6.36	4.92	14.51
5	5459.03	47.42 AV	54	-6.58	-56.28	-55.31	4.92	-47.84

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

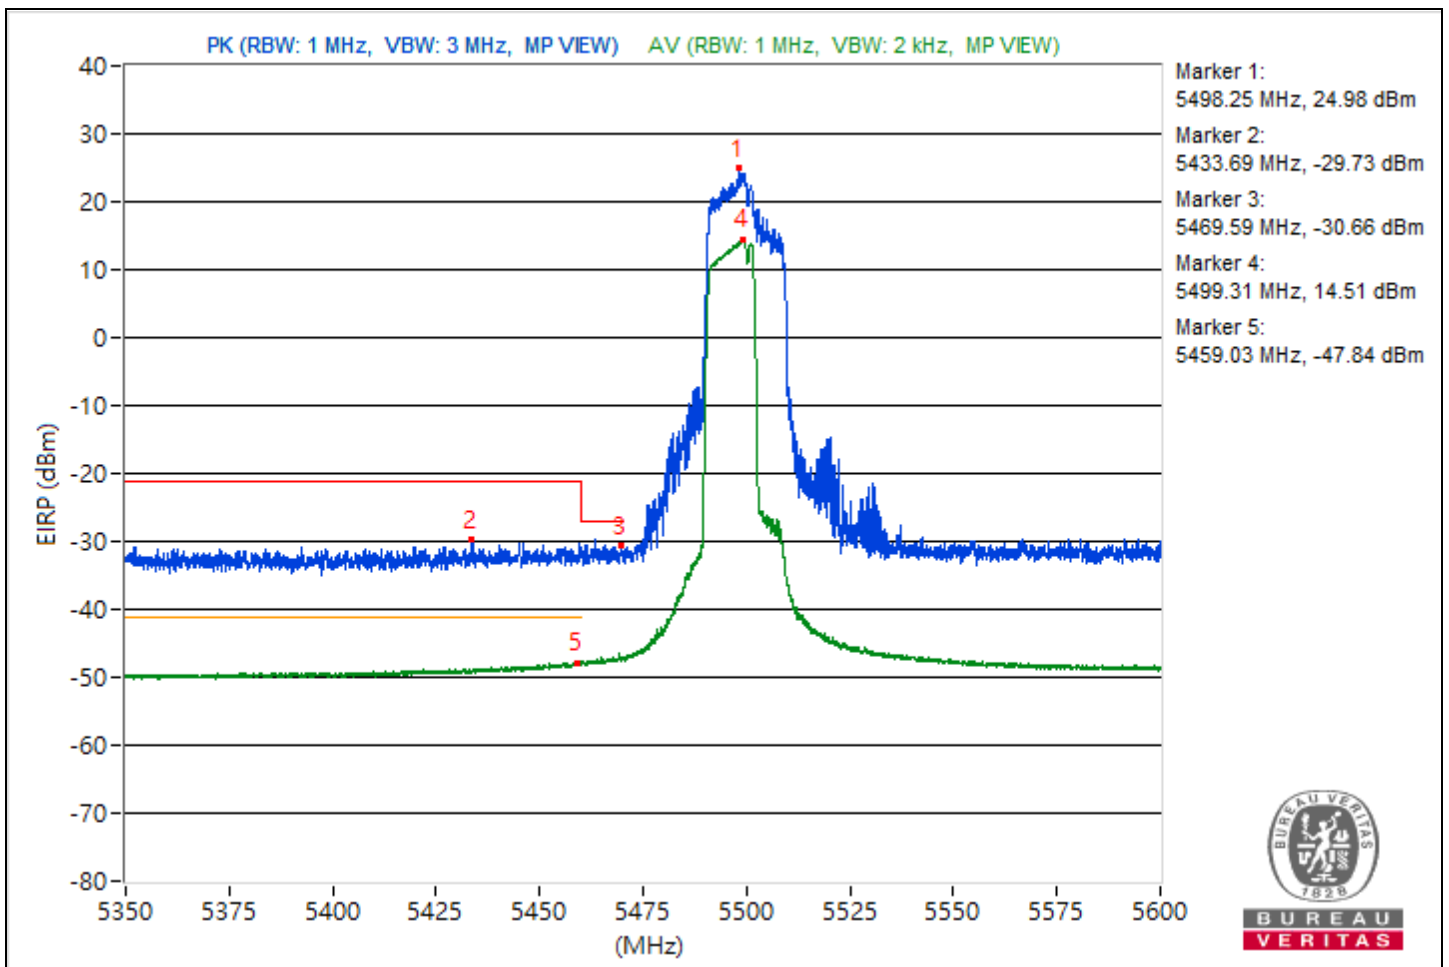


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	5.625 GHz ~ 5.825 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.55	119.36			16.74	15.5	4.92	24.1
2	#5810.85	65.56	68.26	-2.7	-36.42	-39.31	4.92	-29.7

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

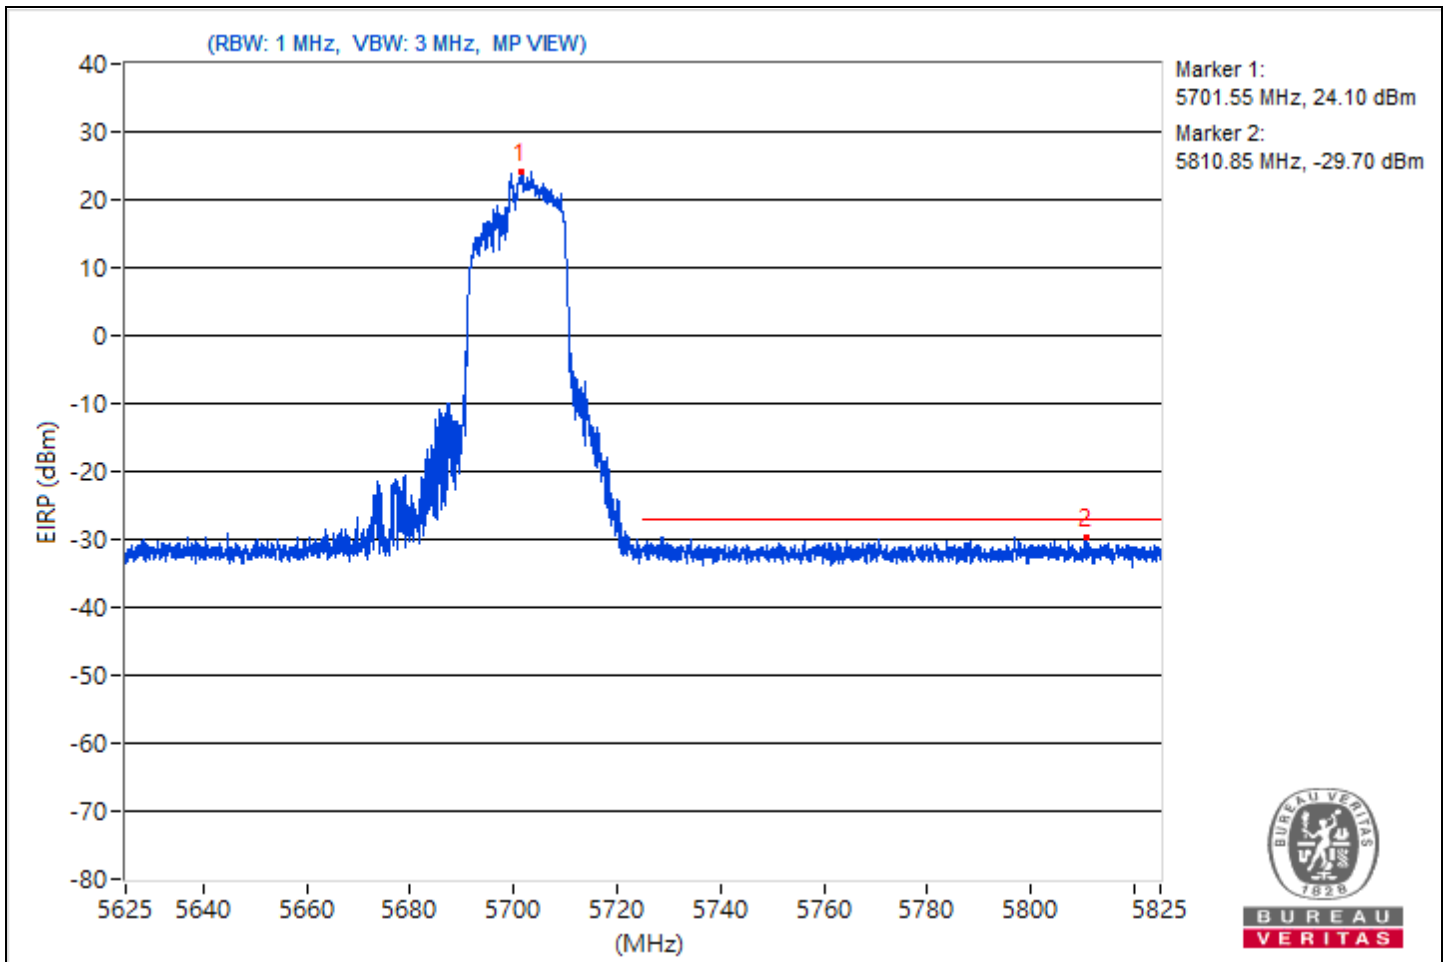


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	22°C, 65% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5722.43	118.75			14.85	16.16	4.92	23.49
2	#5963.06	65.47	68.26	-2.79	-36.12	-40.3	4.92	-29.79

Notes:


1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

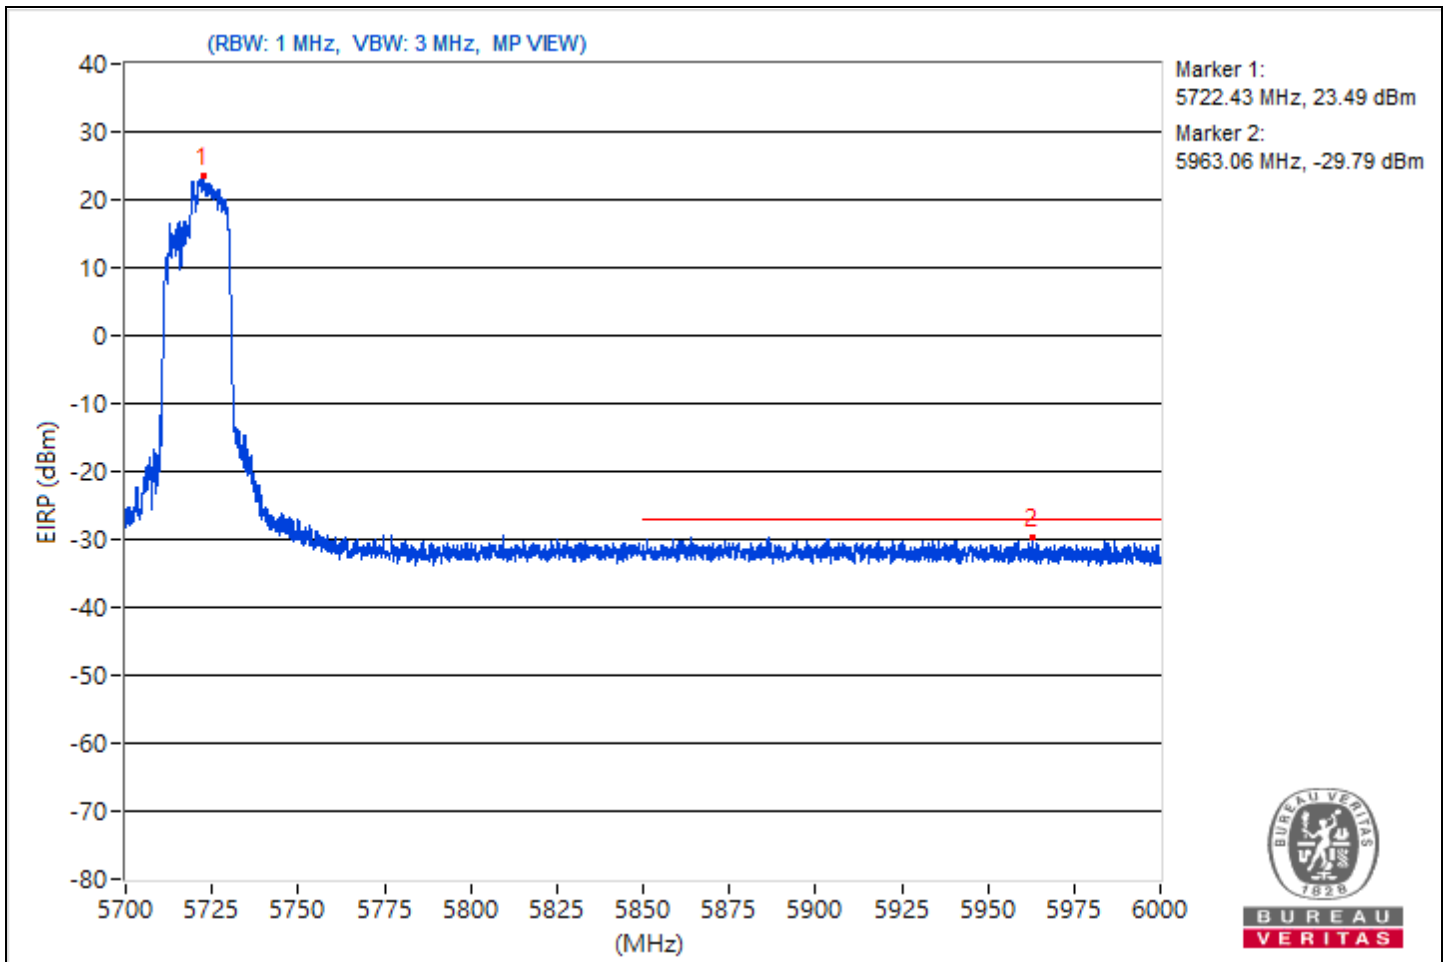

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5288.52	109.67 PK			5.16	7.5	4.92	14.41
2	*5287.98	99.59 AV			-3.79	-3.42	4.92	4.33
3	5354.8	64.73 PK	74	-9.27	-36.56	-41.91	4.92	-30.53
4	5350.18	47.57 AV	54	-6.43	-55.36	-55.9	4.92	-47.69

- Notes:
1. Margin value = Emission Level - Limit value
 2. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

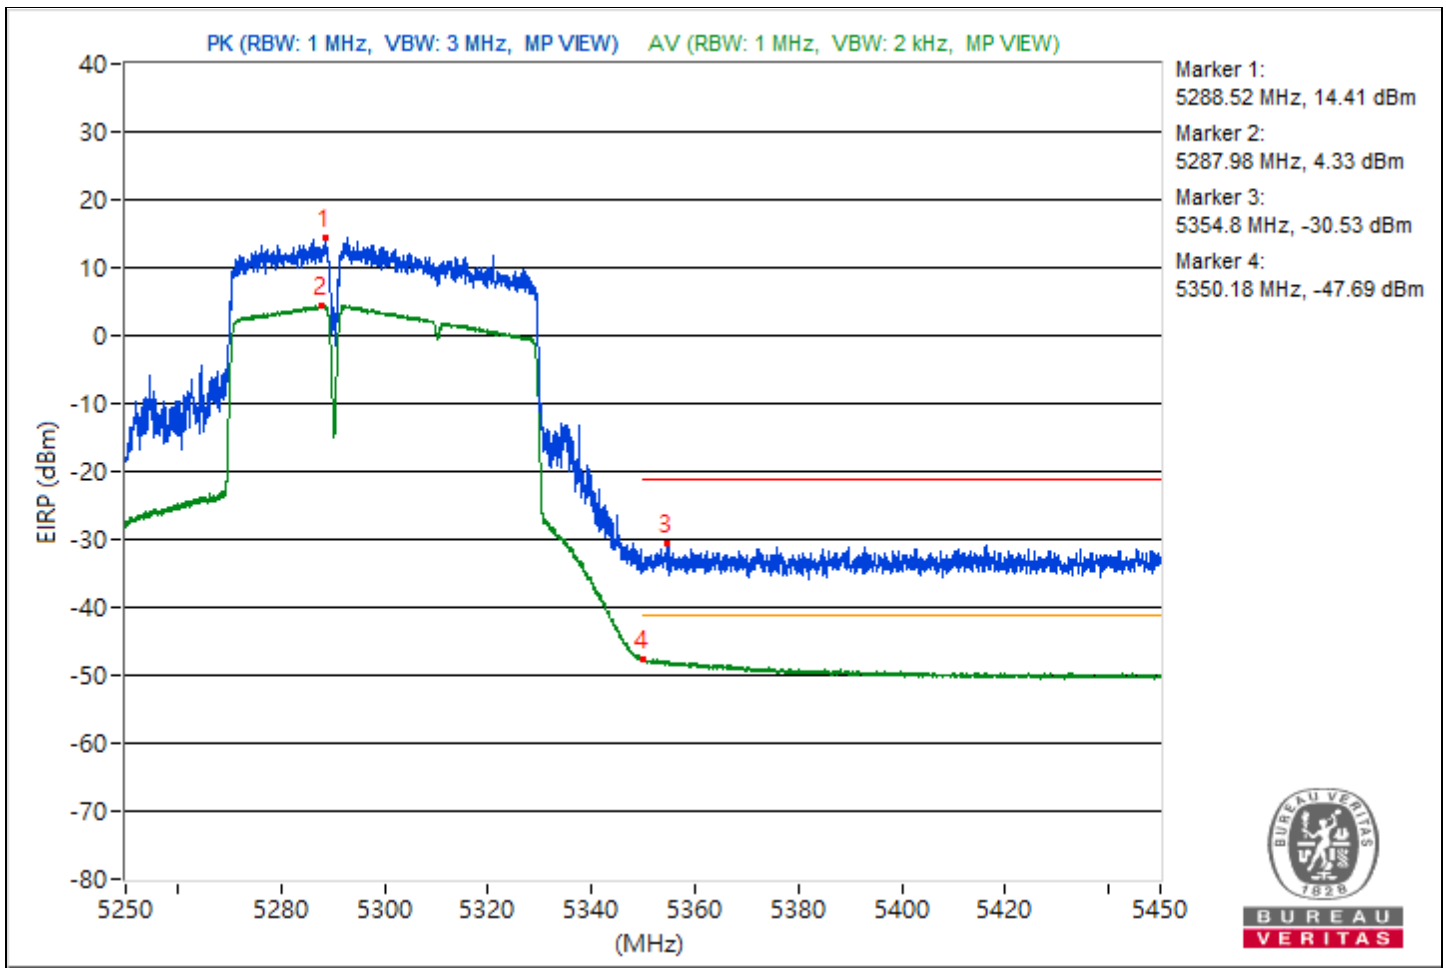


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5521.78	110.06 PK			5.72	7.78	4.92	14.8
2	5452.16	64.11 PK	74	-9.89	-38.14	-40.29	4.92	-31.15
3	#5462.59	64.05 PK	68.26	-4.21	-38.08	-40.53	4.92	-31.21
4	*5528.22	100.09 AV			-2.88	-3.34	4.92	4.83
5	5459.56	46.85 AV	54	-7.15	-56.63	-56.07	4.92	-48.41

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

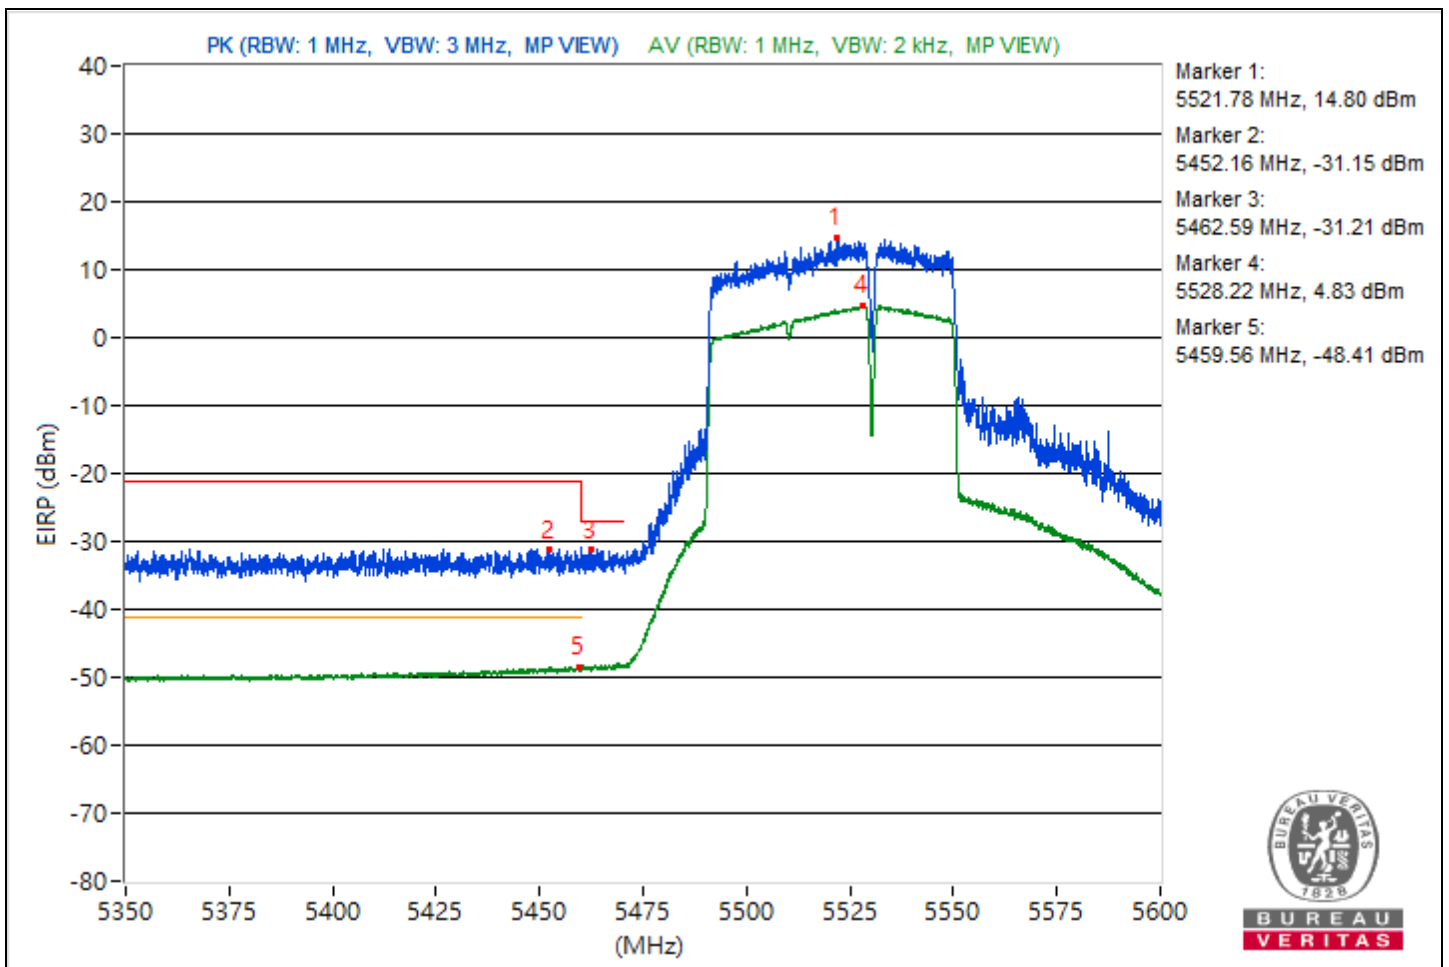


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	5.7 GHz ~ 6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5701.84	112.78			10.6	8.28	4.92	17.52
2	#5878.99	65.4	68.26	-2.86	-36.59	-39.45	4.92	-29.86

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

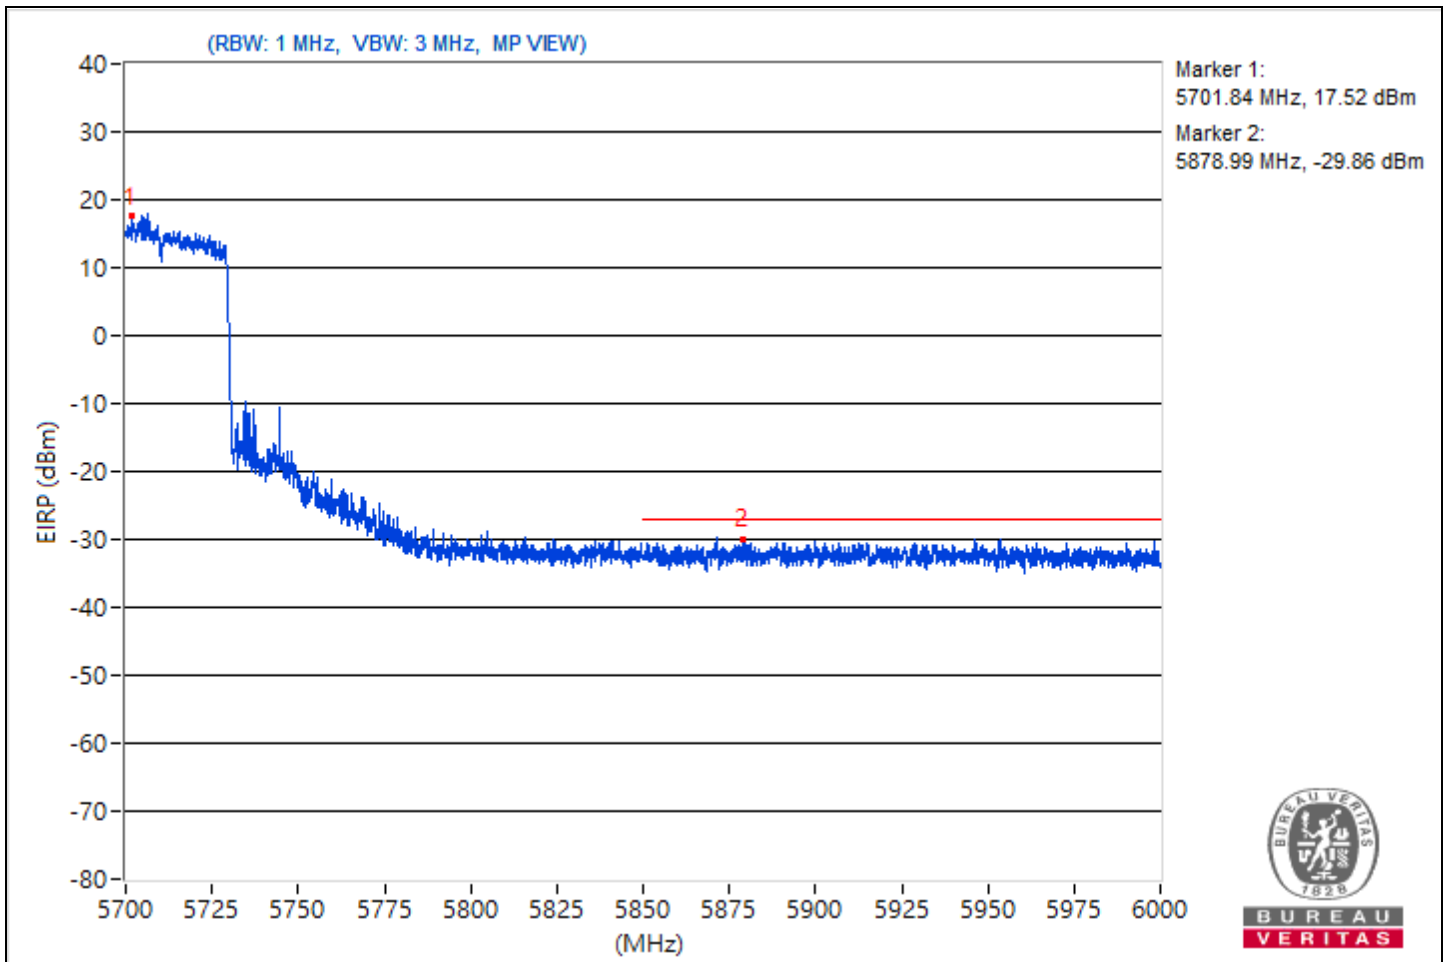


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5230.4	104.56 PK			-2.47	3.37	4.92	9.3
2	*5247.85	95.84 AV			-7.45	-7.24	4.92	0.58
3	5139.25	66.69 PK	74	-7.31	-39	-34.93	4.92	-28.57
4	5128.18	51.58 AV	54	-2.42	-51.71	-51.51	4.92	-43.68

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

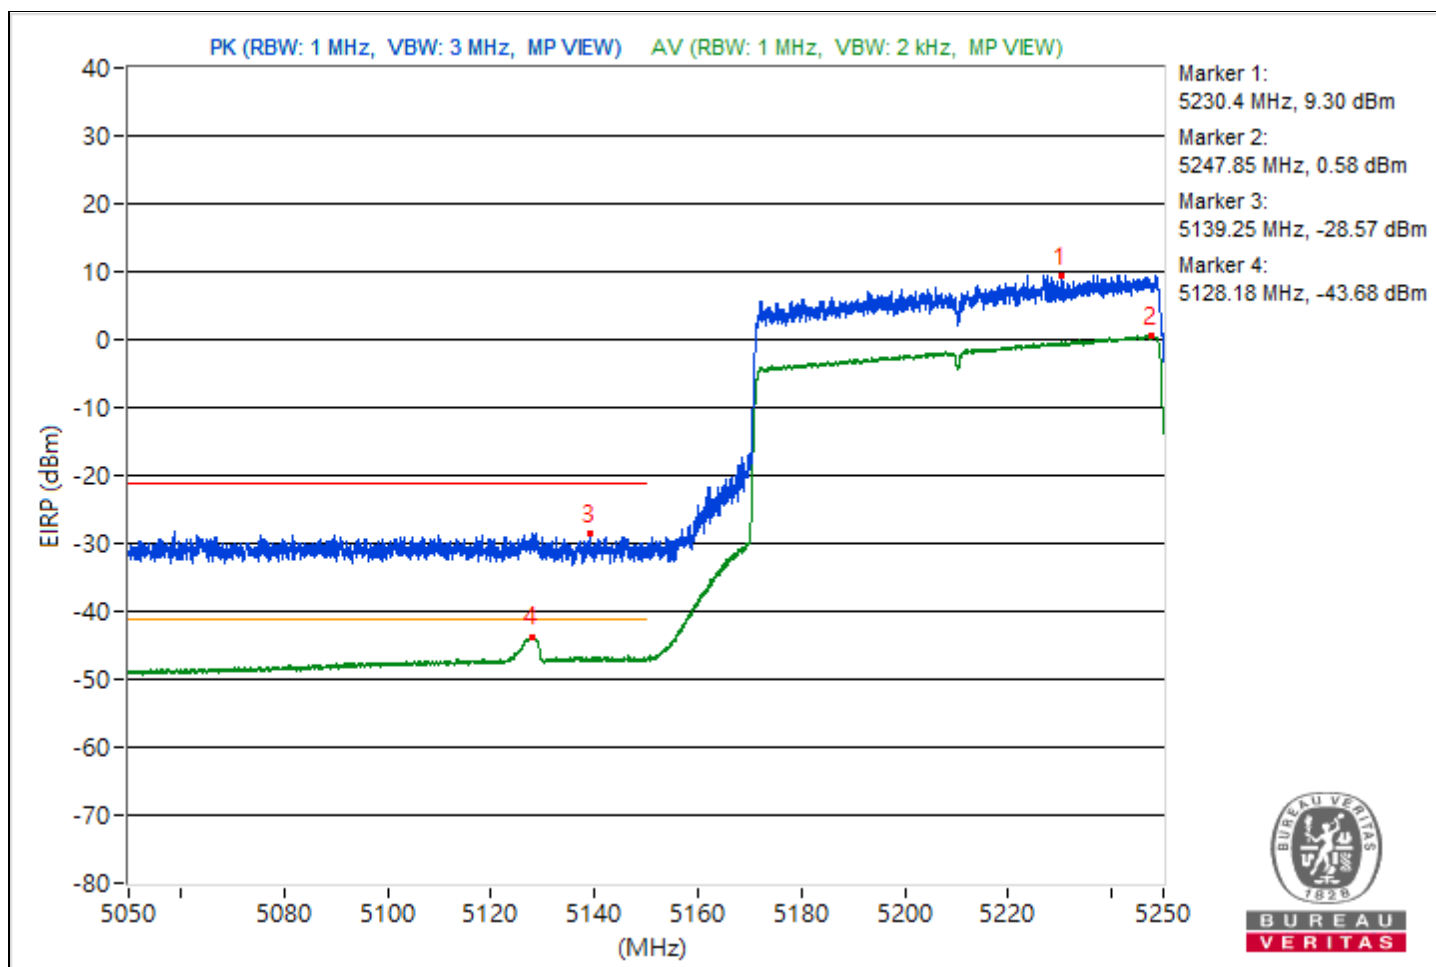


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5255.45	105.77 PK			4.22	-0.08	4.92	10.51
2	*5252	95.57 AV			-7.38	-7.87	4.92	0.31
3	5436.05	65.02 PK	74	-8.98	-36.76	-40.25	4.92	-30.24
4	5355.9	47.49 AV	54	-6.51	-55.78	-55.62	4.92	-47.77

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

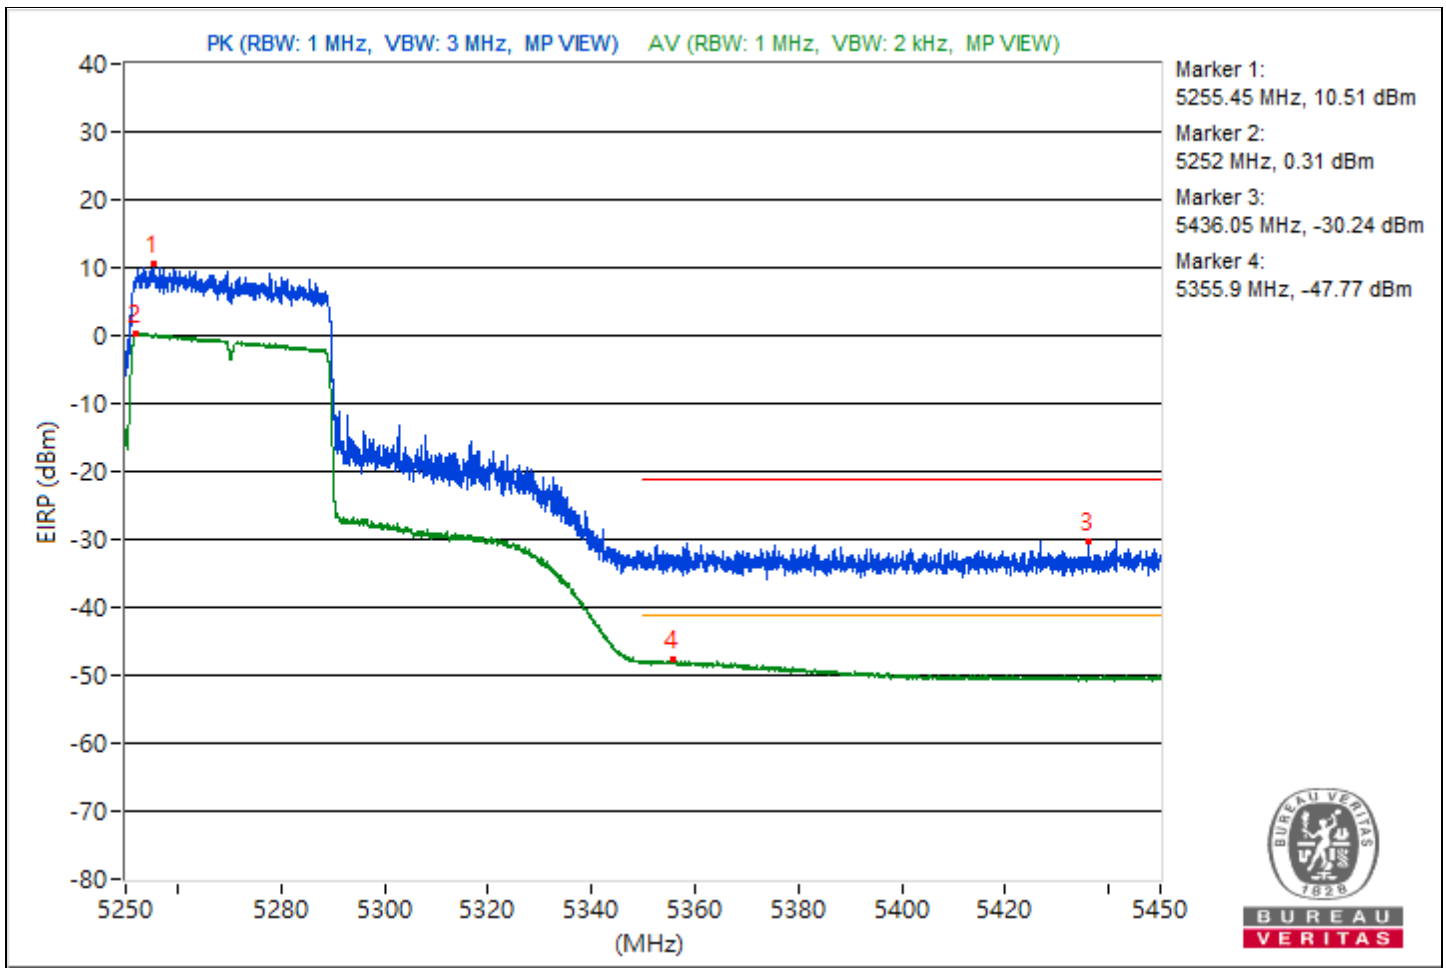


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5573.03	107.27 PK			1.61	5.64	4.92	12.01
2	5448.16	64.6 PK	74	-9.4	-37.16	-40.74	4.92	-30.66
3	#5466.87	64.55 PK	68.26	-3.71	-39.2	-38.15	4.92	-30.71
4	*5568.59	96.36 AV			-6.57	-7.1	4.92	1.1
5	5448.12	50.88 AV	54	-3.12	-52.11	-52.51	4.92	-44.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

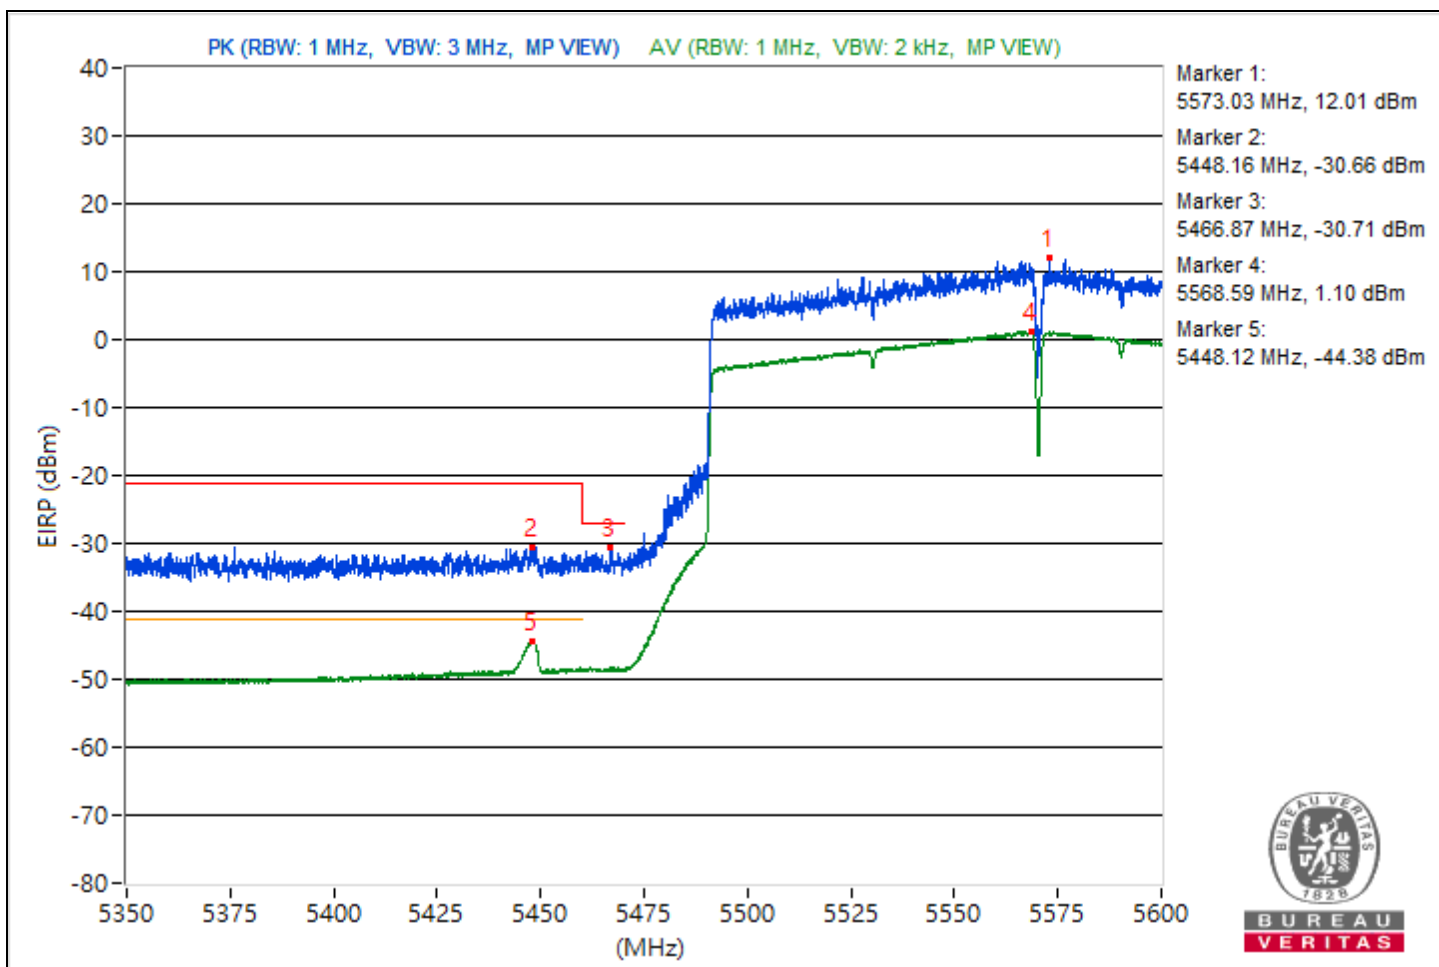


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.05 GHz ~ 5.25 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5223.05	104.05 PK			-2.26	2.66	4.92	8.79
2	*5246.93	95.25 AV			-7.68	-8.22	4.92	-0.01
3	5071.43	67.27 PK	74	-6.73	-39.43	-34	4.92	-27.99
4	5136.77	48.8 AV	54	-5.2	-54.81	-54	4.92	-46.46

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

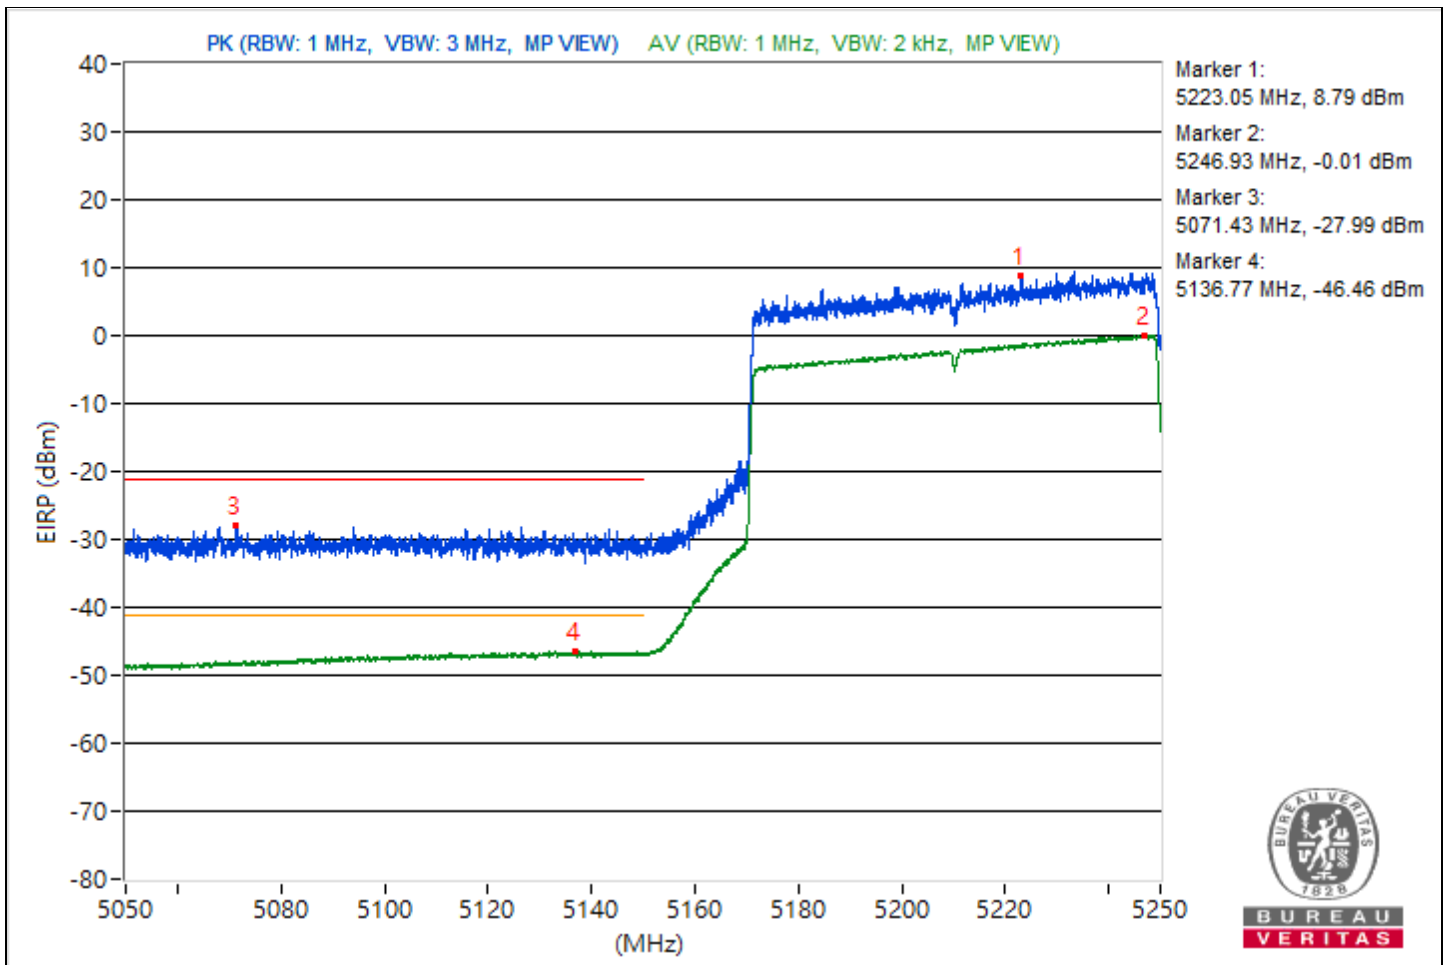


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	5.25 GHz ~ 5.45 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5256.55	105.09 PK			-0.84	3.56	4.92	9.83
2	*5254.82	95.09 AV			-7.85	-8.37	4.92	-0.17
3	5394.45	64.22 PK	74	-9.78	-37.4	-41.46	4.92	-31.04
4	5362.52	48.11 AV	54	-5.89	-54.49	-55.76	4.92	-47.15

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

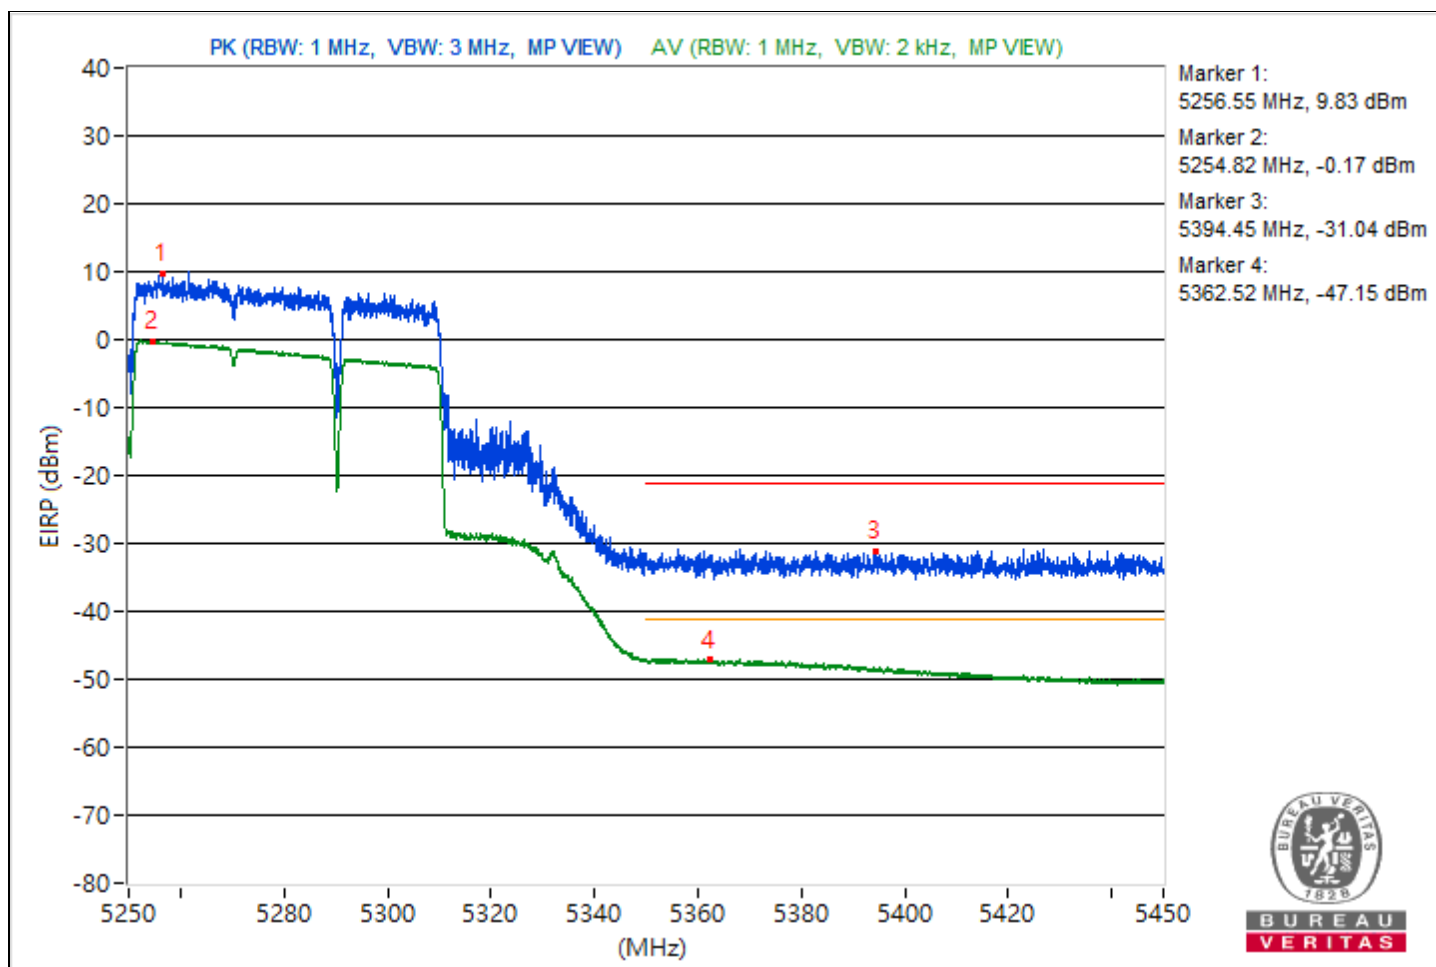




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	5.35 GHz ~ 5.6 GHz	Environmental Conditions	25°C, 62% RH
Tested By	Katina Lu		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5567.28	105.45 PK			0.65	3.43	4.92	10.19
2	5441.19	64.05 PK	74	-9.95	-42.32	-37.33	4.92	-31.21
3	#5467.75	64.14 PK	68.26	-4.12	-40.93	-37.74	4.92	-31.12
4	*5572.09	95.98 AV			-7.43	-7.01	4.92	0.72
5	5457.47	47.15 AV	54	-6.85	-56.12	-55.97	4.92	-48.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

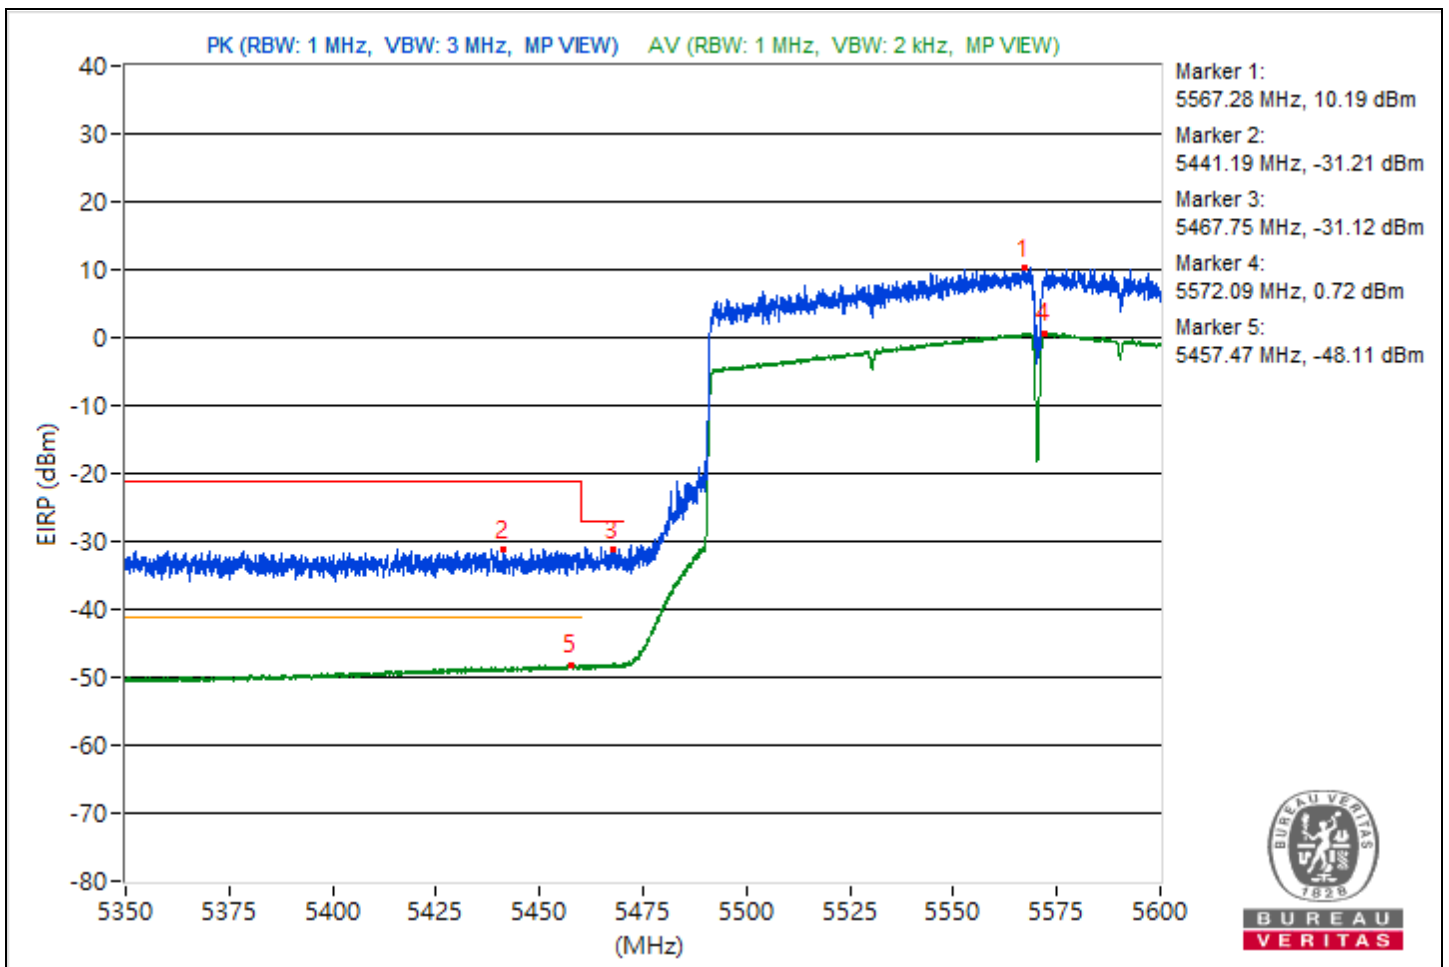

Mode B
1S1T


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	53.8 PK	68.2	-14.4	3.60 H	84	37.9	15.9
2	15780.00	48.7 PK	74.0	-25.3	1.60 H	134	31.6	17.1
3	15780.00	36.4 AV	54.0	-17.6	1.60 H	134	19.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

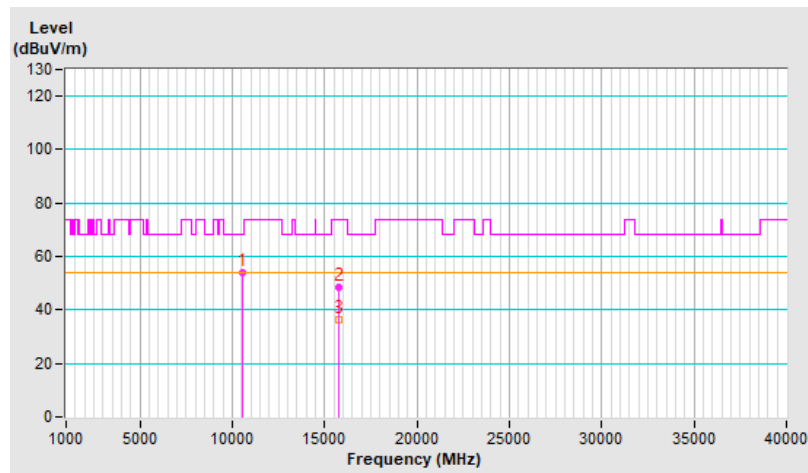


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	54.3 PK	68.2	-13.9	2.02 V	189	38.4	15.9
2	15780.00	48.5 PK	74.0	-25.5	1.49 V	25	31.4	17.1
3	15780.00	36.7 AV	54.0	-17.3	1.49 V	25	19.6	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

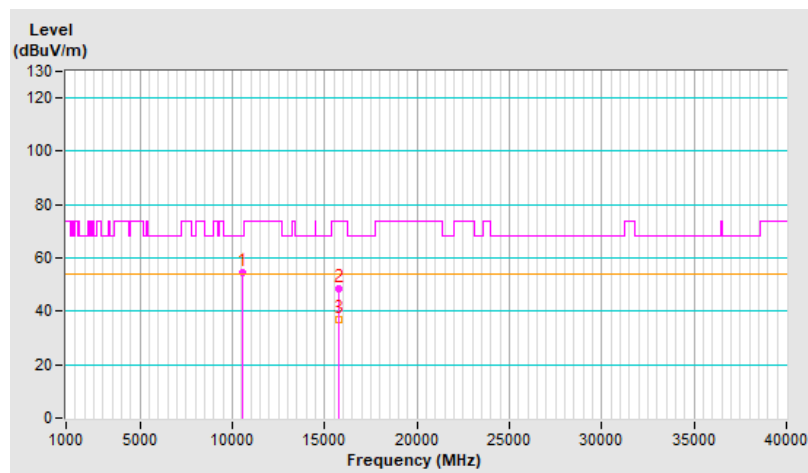


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	52.9 PK	74.0	-21.1	3.57 H	92	36.6	16.3
2	10600.00	40.8 AV	54.0	-13.2	3.57 H	92	24.5	16.3
3	15900.00	49.2 PK	74.0	-24.8	1.63 H	120	31.8	17.4
4	15900.00	36.8 AV	54.0	-17.2	1.63 H	120	19.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

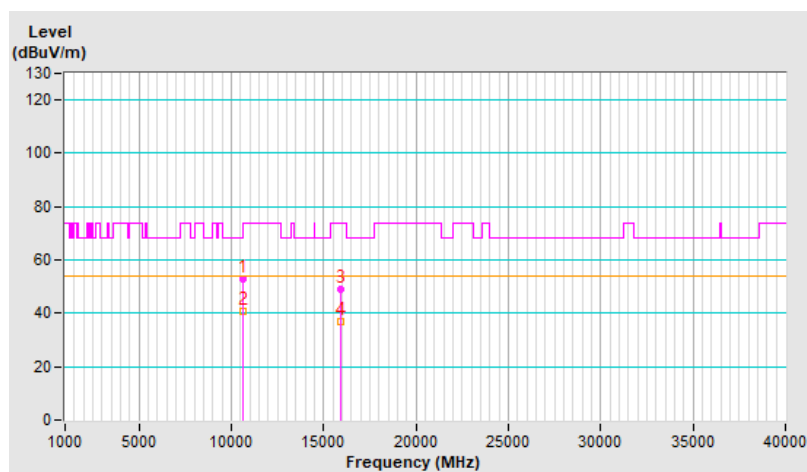


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	52.0 PK	74.0	-22.0	2.00 V	201	35.7	16.3
2	10600.00	40.9 AV	54.0	-13.1	2.00 V	201	24.6	16.3
3	15900.00	48.2 PK	74.0	-25.8	1.48 V	7	30.8	17.4
4	15900.00	36.4 AV	54.0	-17.6	1.48 V	7	19.0	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

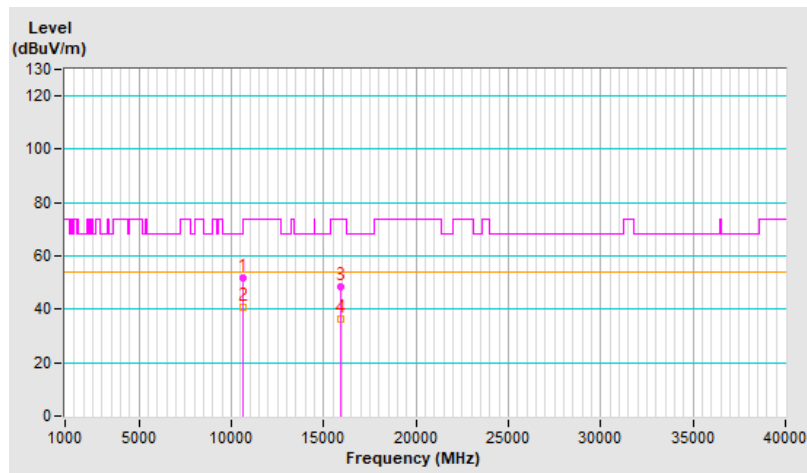


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	53.1 PK	74.0	-20.9	3.61 H	79	36.7	16.4
2	10640.00	41.1 AV	54.0	-12.9	3.61 H	79	24.7	16.4
3	15960.00	49.1 PK	74.0	-24.9	1.59 H	143	31.9	17.2
4	15960.00	36.7 AV	54.0	-17.3	1.59 H	143	19.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

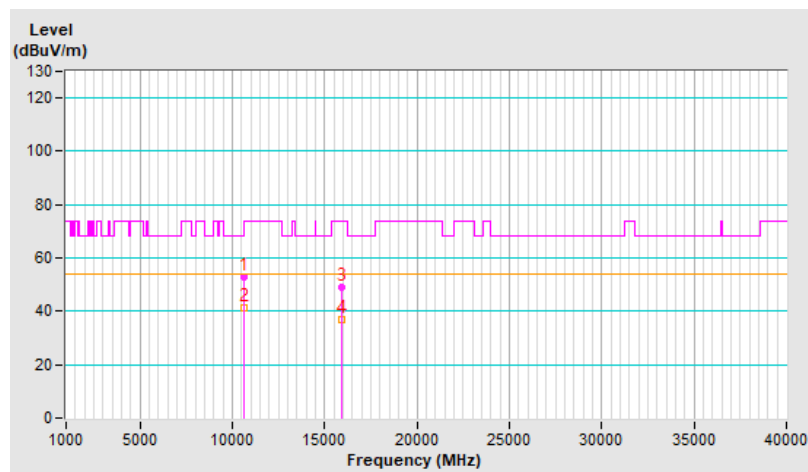


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	52.3 PK	74.0	-21.7	1.99 V	210	35.9	16.4
2	10640.00	41.3 AV	54.0	-12.7	1.99 V	210	24.9	16.4
3	15960.00	48.4 PK	74.0	-25.6	1.46 V	8	31.2	17.2
4	15960.00	36.3 AV	54.0	-17.7	1.46 V	8	19.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

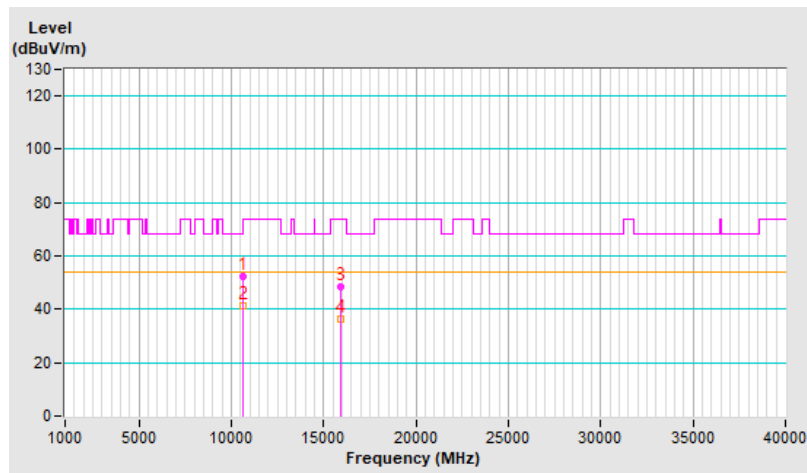


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	53.8 PK	74.0	-20.2	3.73 H	97	36.9	16.9
2	11000.00	41.3 AV	54.0	-12.7	3.73 H	97	24.4	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.49 H	128	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

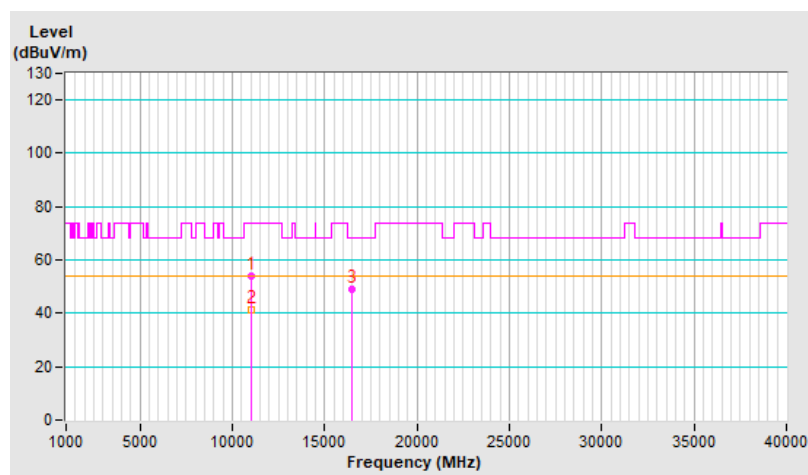


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.3 PK	74.0	-23.7	1.88 V	208	33.4	16.9
2	11000.00	39.6 AV	54.0	-14.4	1.88 V	208	22.7	16.9
3	#16500.00	48.4 PK	68.2	-19.8	1.49 V	55	28.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

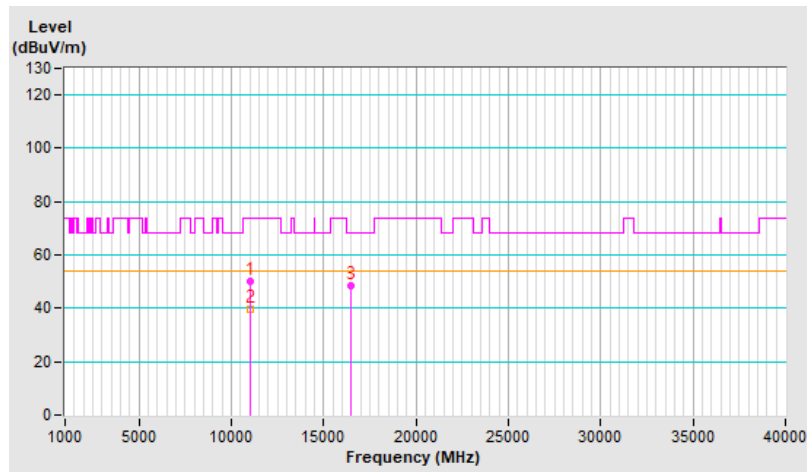


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	53.6 PK	74.0	-20.4	3.61 H	71	37.0	16.6
2	11160.00	41.1 AV	54.0	-12.9	3.61 H	71	24.5	16.6
3	#16740.00	48.6 PK	68.2	-19.6	1.60 H	151	27.3	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

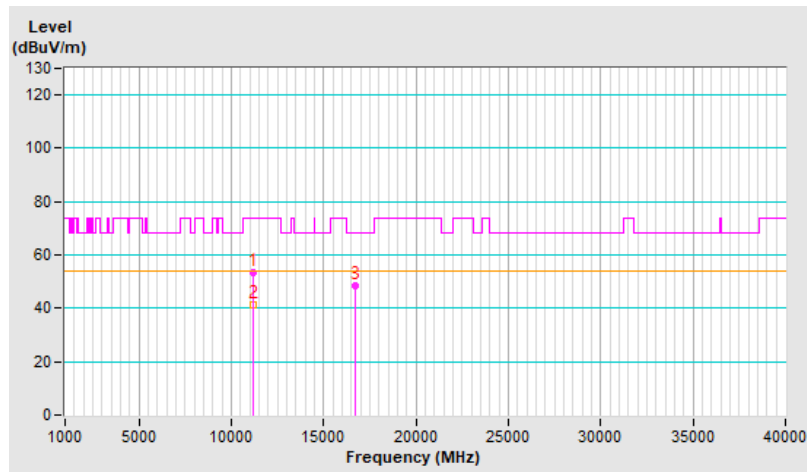


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	50.2 PK	74.0	-23.8	2.00 V	163	33.6	16.6
2	11160.00	39.7 AV	54.0	-14.3	2.00 V	163	23.1	16.6
3	#16740.00	48.1 PK	68.2	-20.1	1.48 V	0	26.8	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

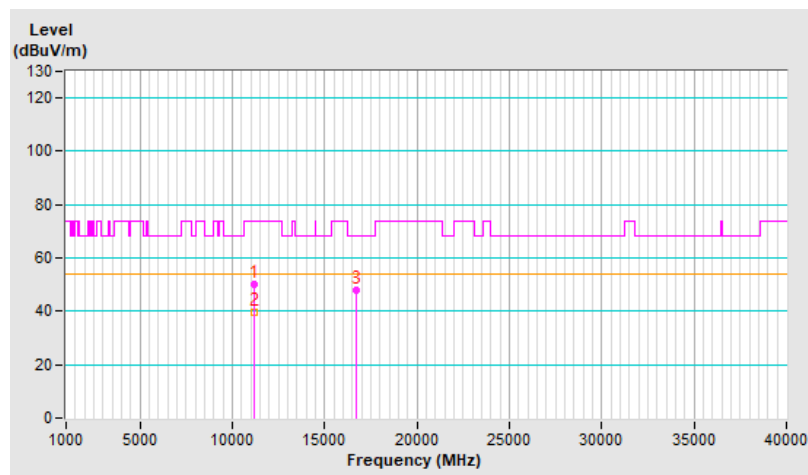


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.9 PK	74.0	-25.1	3.78 H	63	32.0	16.9
2	11400.00	37.6 AV	54.0	-16.4	3.78 H	63	20.7	16.9
3	#17100.00	48.1 PK	68.2	-20.1	1.52 H	158	27.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

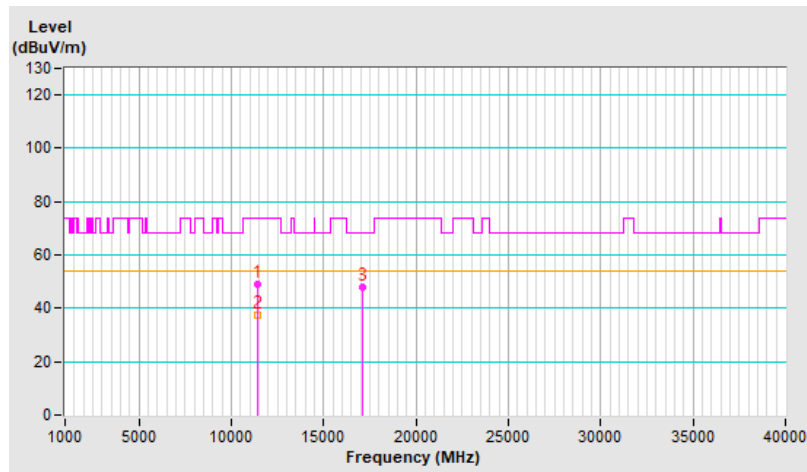


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.7 PK	74.0	-24.3	1.89 V	184	32.8	16.9
2	11400.00	38.8 AV	54.0	-15.2	1.89 V	184	21.9	16.9
3	#17100.00	48.4 PK	68.2	-19.8	1.39 V	48	28.2	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

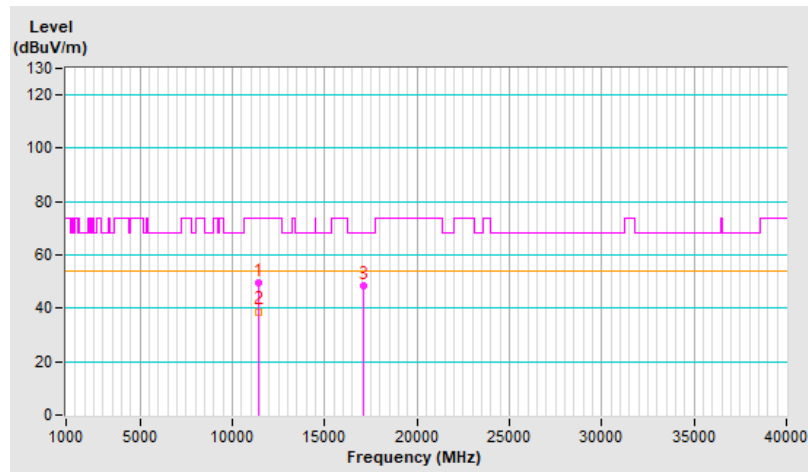


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.0 PK	74.0	-25.0	3.44 H	26	32.1	16.9
2	11440.00	38.0 AV	54.0	-16.0	3.44 H	26	21.1	16.9
3	#17160.00	51.2 PK	68.2	-17.0	1.37 H	181	31.2	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

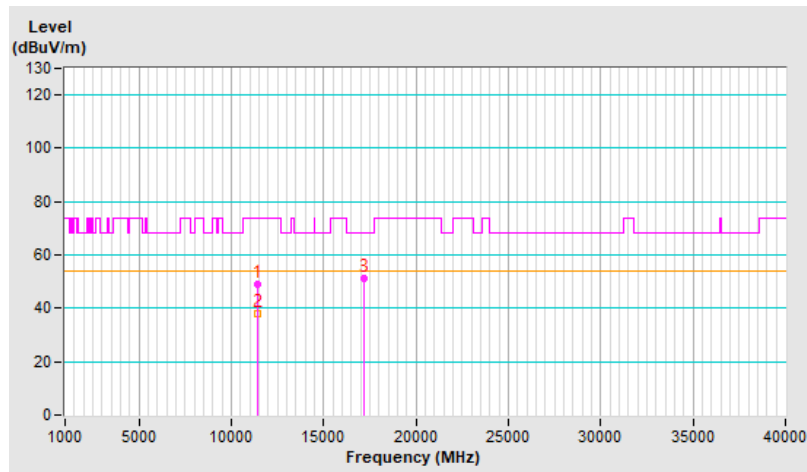


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.5 PK	74.0	-24.5	1.94 V	234	32.6	16.9
2	11440.00	38.5 AV	54.0	-15.5	1.94 V	234	21.6	16.9
3	#17160.00	50.1 PK	68.2	-18.1	1.32 V	46	30.1	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

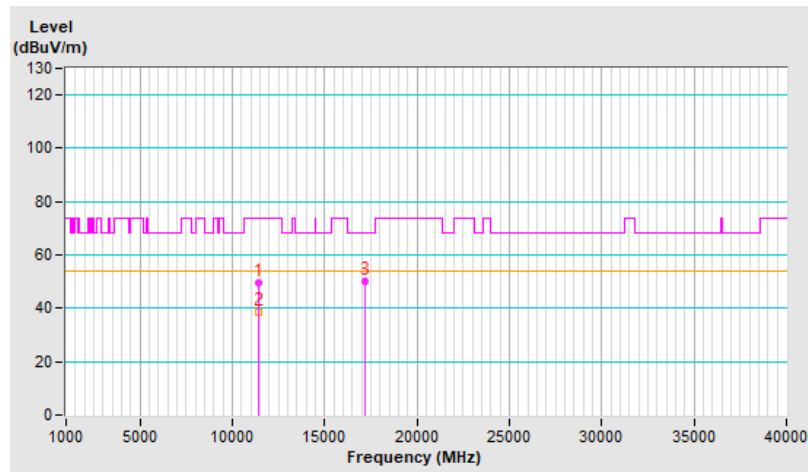


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	50.0 PK	68.2	-18.2	3.58 H	75	33.9	16.1
2	15810.00	48.7 PK	74.0	-25.3	1.51 H	144	31.6	17.1
3	15810.00	37.5 AV	54.0	-16.5	1.51 H	144	20.4	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

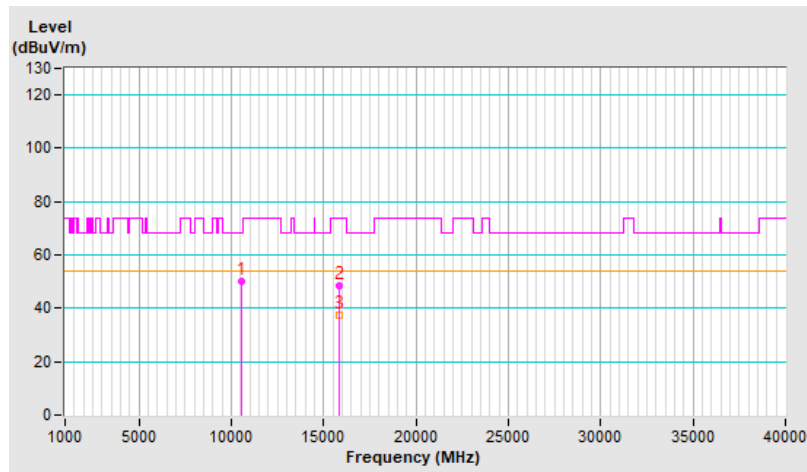


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.2 PK	68.2	-19.0	1.93 V	258	33.1	16.1
2	15810.00	48.8 PK	74.0	-25.2	1.53 V	28	31.7	17.1
3	15810.00	36.4 AV	54.0	-17.6	1.53 V	28	19.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

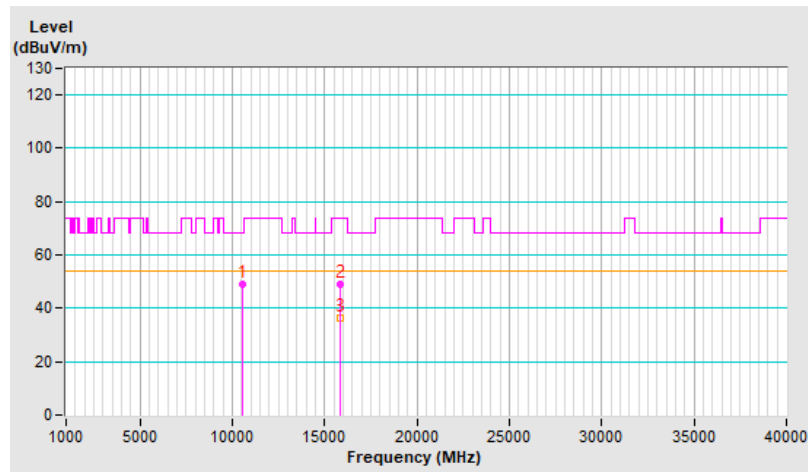


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.5 PK	74.0	-24.5	3.63 H	98	33.1	16.4
2	10620.00	37.9 AV	54.0	-16.1	3.63 H	98	21.5	16.4
3	15930.00	48.6 PK	74.0	-25.4	1.53 H	149	31.3	17.3
4	15930.00	37.6 AV	54.0	-16.4	1.53 H	149	20.3	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

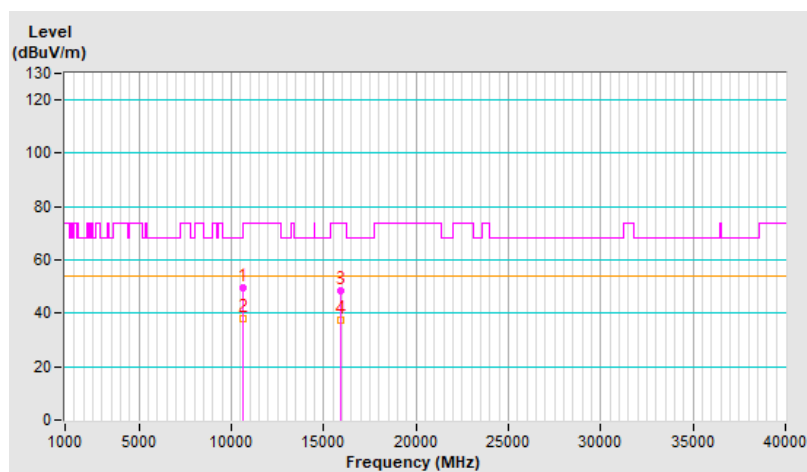


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	49.9 PK	74.0	-24.1	1.94 V	233	33.5	16.4
2	10620.00	38.5 AV	54.0	-15.5	1.94 V	233	22.1	16.4
3	15930.00	48.5 PK	74.0	-25.5	1.46 V	43	31.2	17.3
4	15930.00	36.8 AV	54.0	-17.2	1.46 V	43	19.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

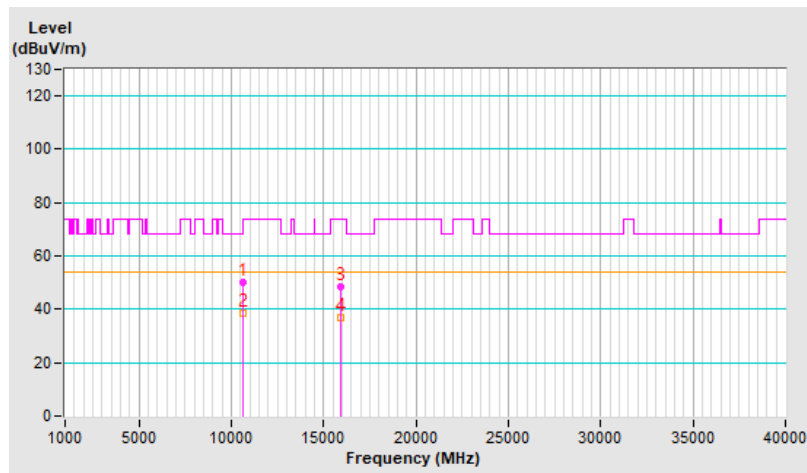


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	49.0 PK	74.0	-25.0	3.64 H	80	32.0	17.0
2	11020.00	37.4 AV	54.0	-16.6	3.64 H	80	20.4	17.0
3	#16530.00	48.3 PK	68.2	-19.9	1.50 H	131	28.4	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

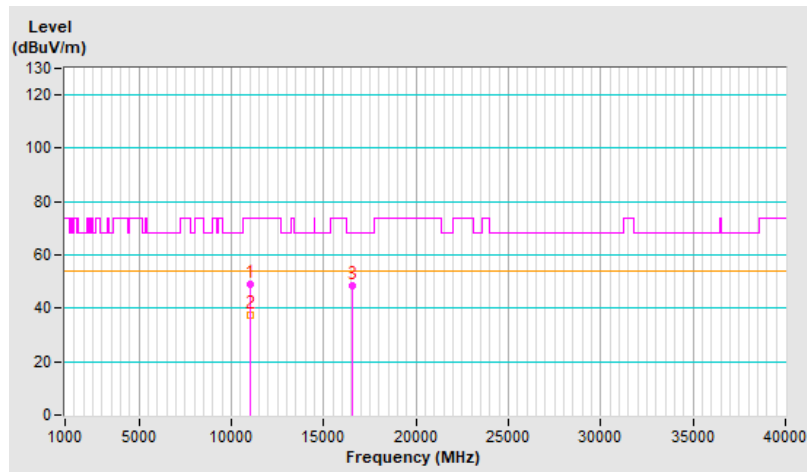


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	50.3 PK	74.0	-23.7	1.89 V	225	33.3	17.0
2	11020.00	38.3 AV	54.0	-15.7	1.89 V	225	21.3	17.0
3	#16530.00	48.5 PK	68.2	-19.7	1.49 V	70	28.6	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

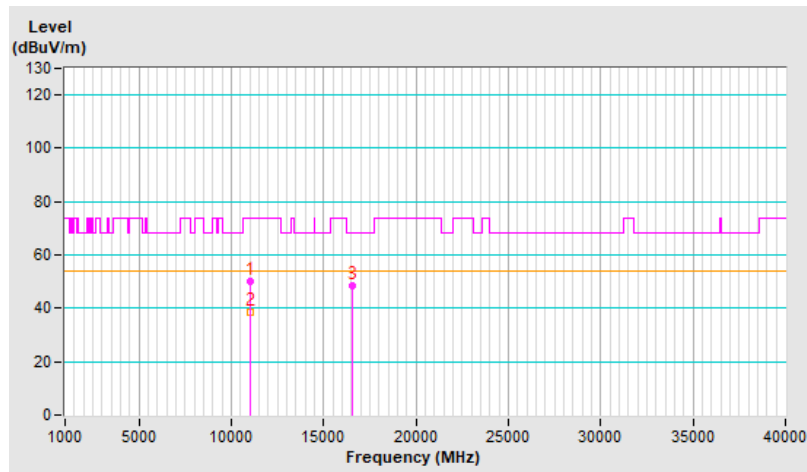


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	49.2 PK	74.0	-24.8	3.57 H	86	32.2	17.0
2	11100.00	37.4 AV	54.0	-16.6	3.57 H	86	20.4	17.0
3	#16650.00	48.4 PK	68.2	-19.8	1.46 H	113	27.4	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

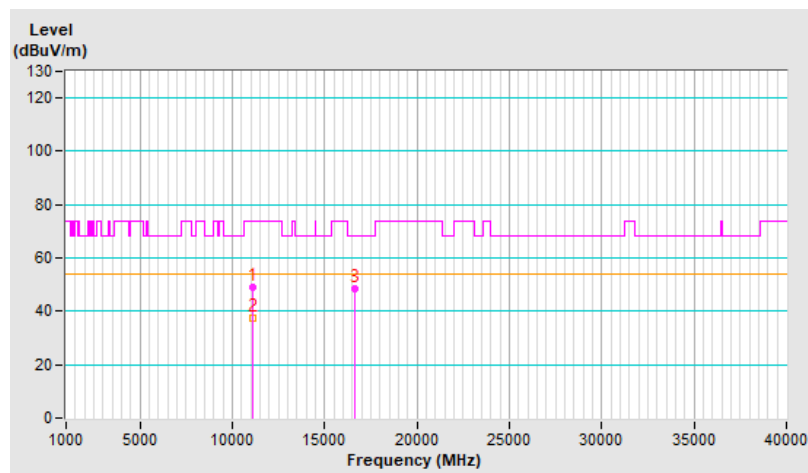


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	50.1 PK	74.0	-23.9	1.83 V	221	33.1	17.0
2	11100.00	38.3 AV	54.0	-15.7	1.83 V	221	21.3	17.0
3	#16650.00	48.6 PK	68.2	-19.6	1.56 V	33	27.6	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

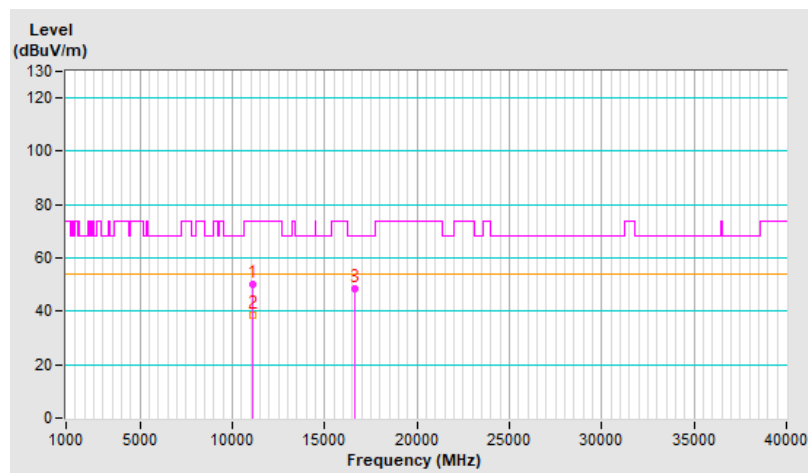


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	50.1 PK	74.0	-23.9	3.69 H	69	33.1	17.0
2	11340.00	38.0 AV	54.0	-16.0	3.69 H	69	21.0	17.0
3	#17010.00	51.3 PK	68.2	-16.9	1.48 H	141	30.5	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

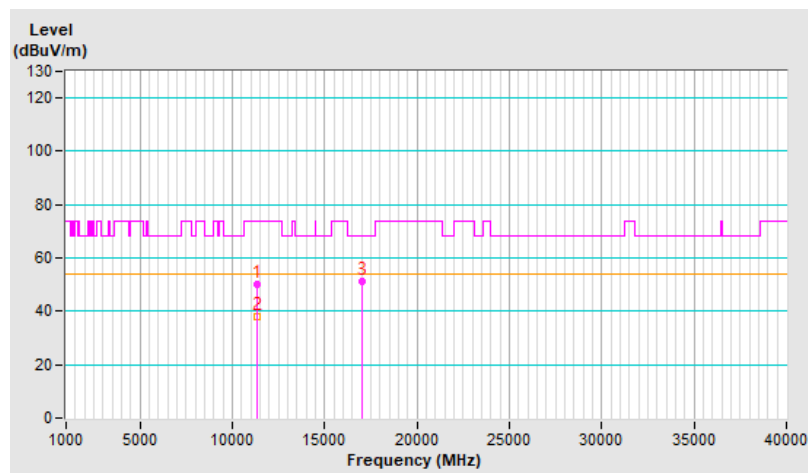


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.3 PK	74.0	-24.7	2.00 V	207	32.3	17.0
2	11340.00	37.5 AV	54.0	-16.5	2.00 V	207	20.5	17.0
3	#17010.00	49.1 PK	68.2	-19.1	1.45 V	35	28.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

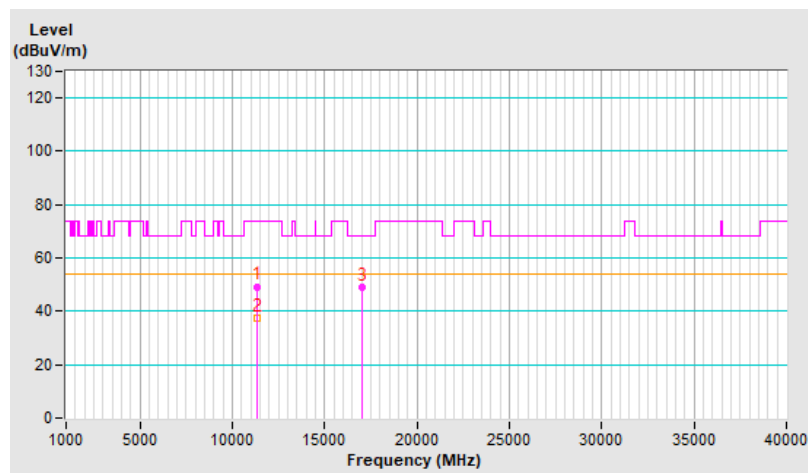


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.6 PK	74.0	-23.4	3.49 H	56	33.7	16.9
2	11420.00	39.1 AV	54.0	-14.9	3.49 H	56	22.2	16.9
3	#17130.00	50.5 PK	68.2	-17.7	1.46 H	148	30.4	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

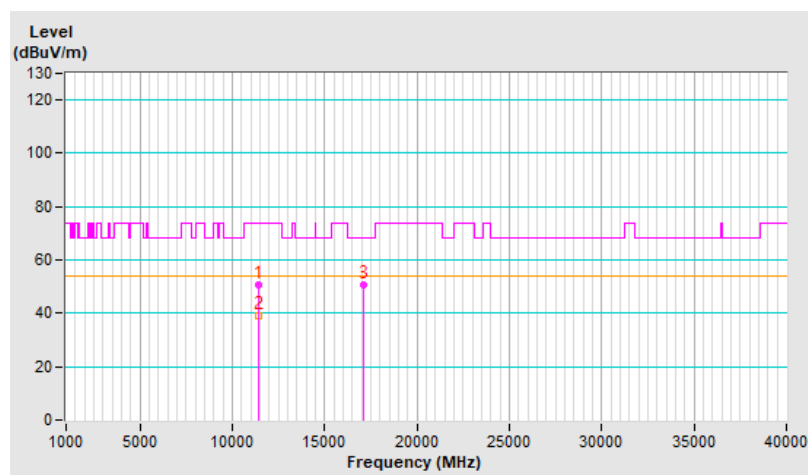


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.0 PK	74.0	-24.0	2.26 V	173	33.1	16.9
2	11420.00	38.2 AV	54.0	-15.8	2.26 V	173	21.3	16.9
3	#17130.00	51.3 PK	68.2	-16.9	1.48 V	32	31.2	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

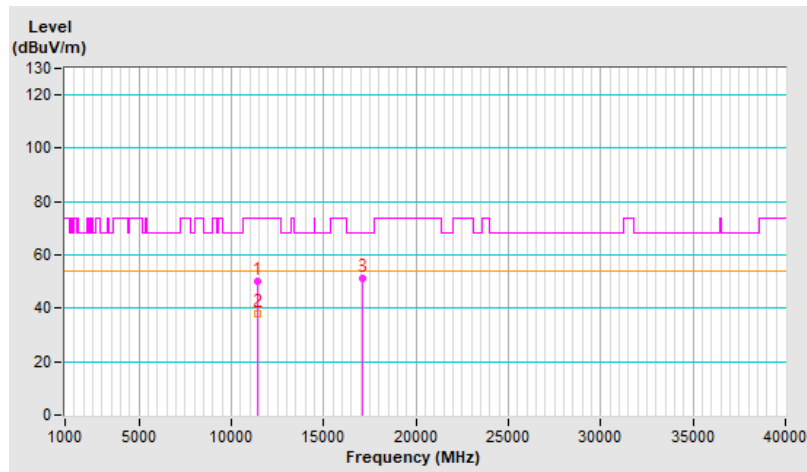


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.1 PK	68.2	-19.1	3.67 H	82	32.8	16.3
2	15870.00	49.1 PK	74.0	-24.9	1.51 H	115	31.8	17.3
3	15870.00	37.8 AV	54.0	-16.2	1.51 H	115	20.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

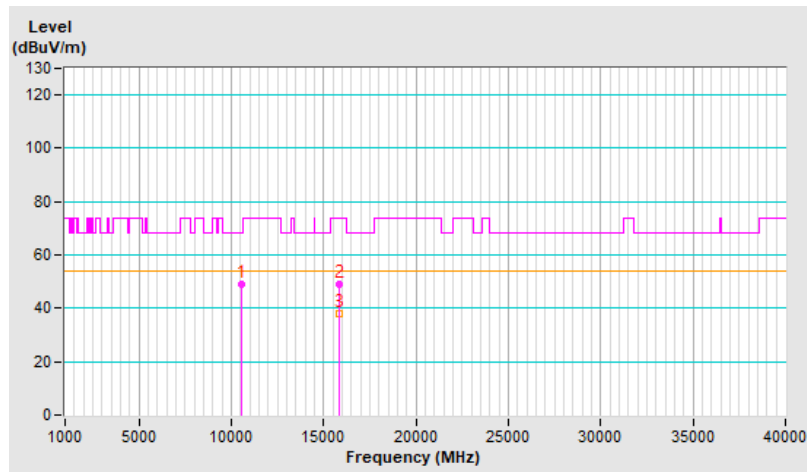


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	50.3 PK	68.2	-17.9	2.02 V	263	34.0	16.3
2	15870.00	48.9 PK	74.0	-25.1	1.50 V	39	31.6	17.3
3	15870.00	36.2 AV	54.0	-17.8	1.50 V	39	18.9	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

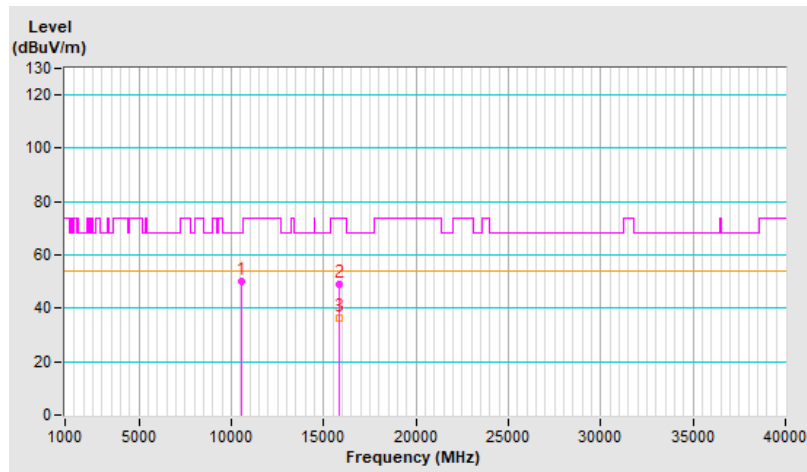


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.0 PK	74.0	-25.0	3.68 H	71	32.1	16.9
2	11060.00	37.5 AV	54.0	-16.5	3.68 H	71	20.6	16.9
3	#16590.00	49.2 PK	68.2	-19.0	1.48 H	122	28.8	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

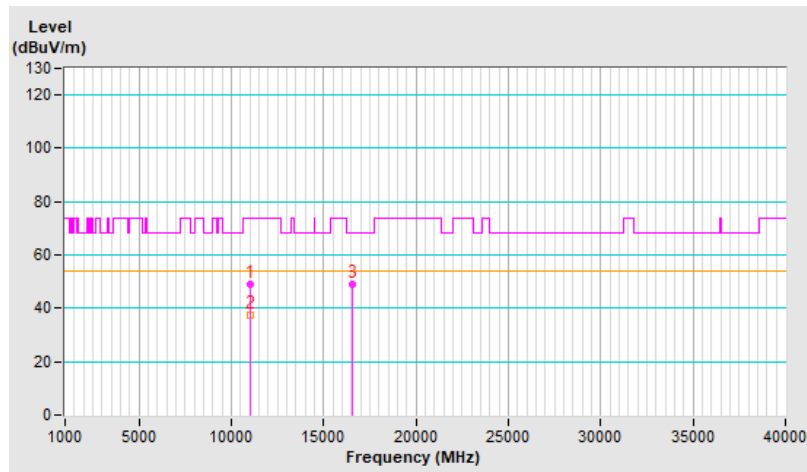


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	50.5 PK	74.0	-23.5	1.98 V	249	33.6	16.9
2	11060.00	38.6 AV	54.0	-15.4	1.98 V	249	21.7	16.9
3	#16590.00	49.1 PK	68.2	-19.1	1.54 V	45	28.7	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

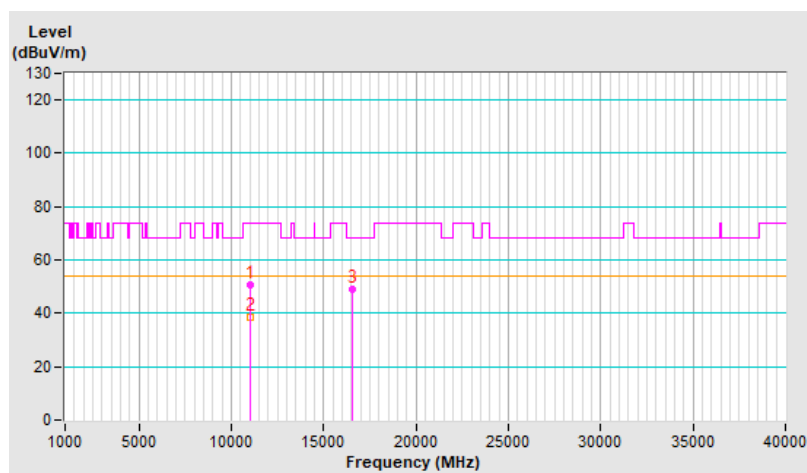


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.5 PK	74.0	-24.5	3.65 H	81	32.8	16.7
2	11220.00	37.7 AV	54.0	-16.3	3.65 H	81	21.0	16.7
3	#16830.00	48.9 PK	68.2	-19.3	1.49 H	116	27.7	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

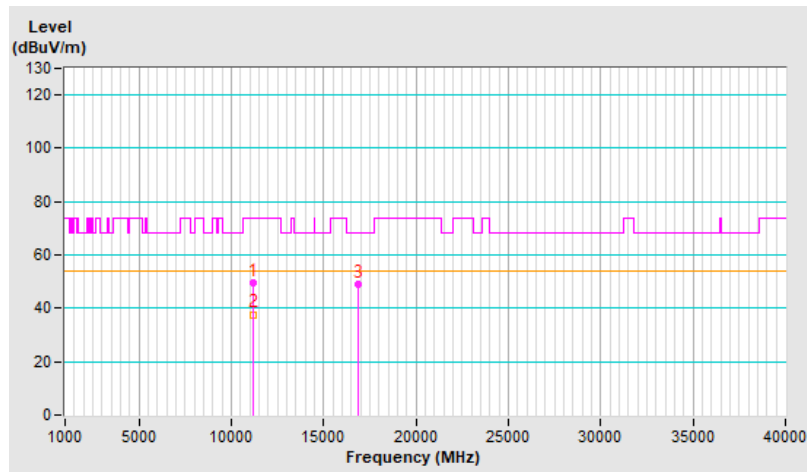


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.6 PK	74.0	-24.4	1.93 V	245	32.9	16.7
2	11220.00	38.0 AV	54.0	-16.0	1.93 V	245	21.3	16.7
3	#16830.00	49.4 PK	68.2	-18.8	1.57 V	32	28.2	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

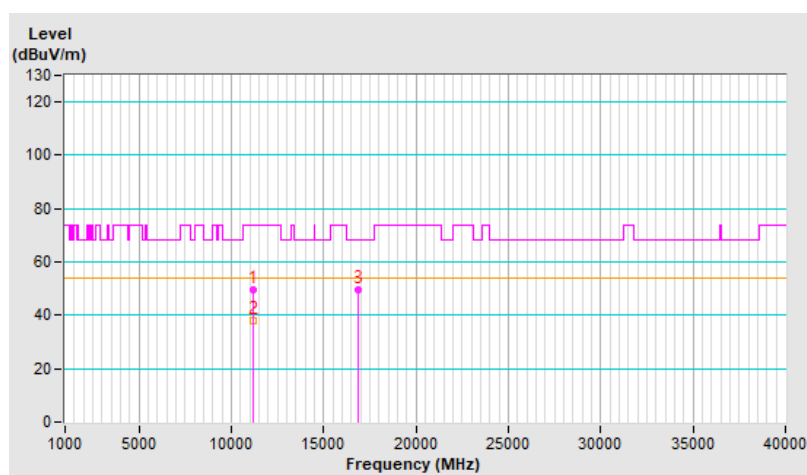


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.6 PK	74.0	-24.4	3.50 H	47	32.6	17.0
2	11380.00	38.6 AV	54.0	-15.4	3.50 H	47	21.6	17.0
3	#17070.00	49.2 PK	68.2	-19.0	1.56 H	141	28.8	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

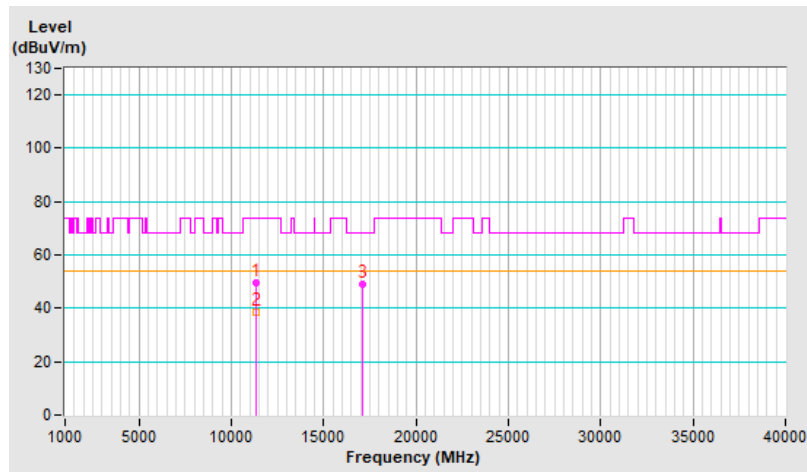


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	50.1 PK	74.0	-23.9	2.21 V	186	33.1	17.0
2	11380.00	38.2 AV	54.0	-15.8	2.21 V	186	21.2	17.0
3	#17070.00	51.9 PK	68.2	-16.3	1.51 V	35	31.5	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

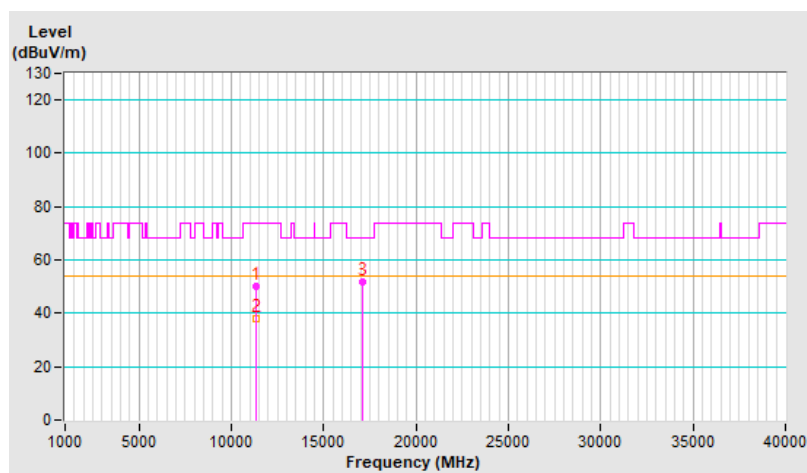


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.0 PK	68.2	-18.2	3.64 H	54	34.1	15.9
2	15750.00	49.7 PK	74.0	-24.3	1.35 H	103	32.5	17.2
3	15750.00	38.0 AV	54.0	-16.0	1.35 H	103	20.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

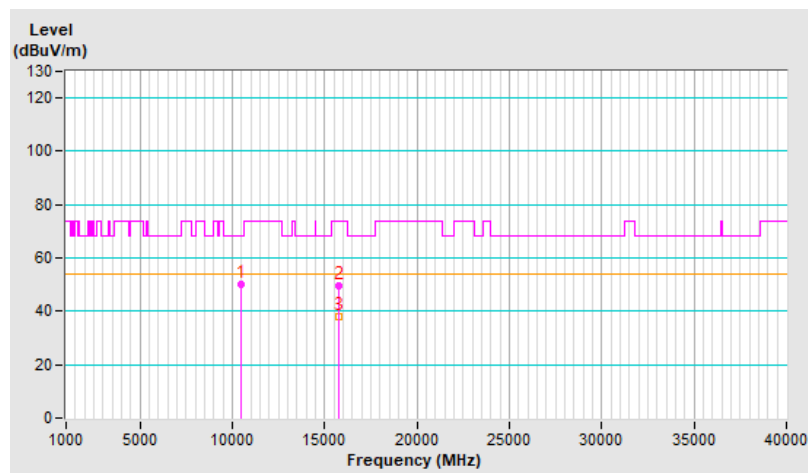


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.9 PK	68.2	-19.3	1.96 V	229	33.0	15.9
2	15750.00	49.0 PK	74.0	-25.0	1.49 V	35	31.8	17.2
3	15750.00	37.1 AV	54.0	-16.9	1.49 V	35	19.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

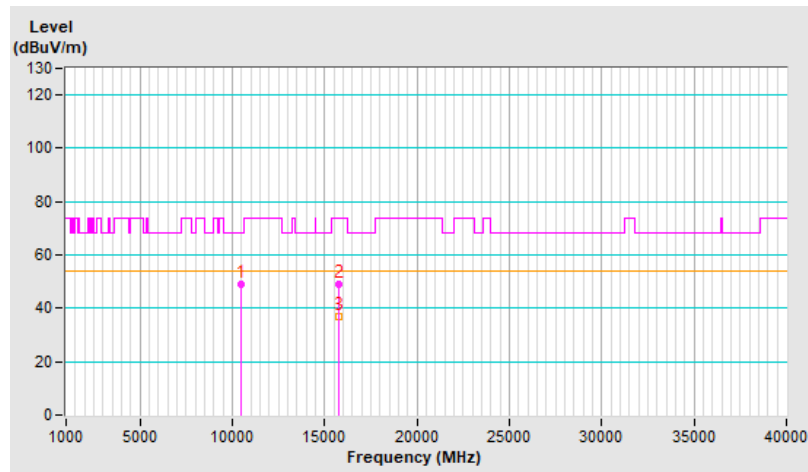


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.7 PK	74.0	-24.3	3.58 H	103	33.0	16.7
2	11140.00	38.6 AV	54.0	-15.4	3.58 H	103	21.9	16.7
3	#16710.00	48.3 PK	68.2	-19.9	1.53 H	118	26.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

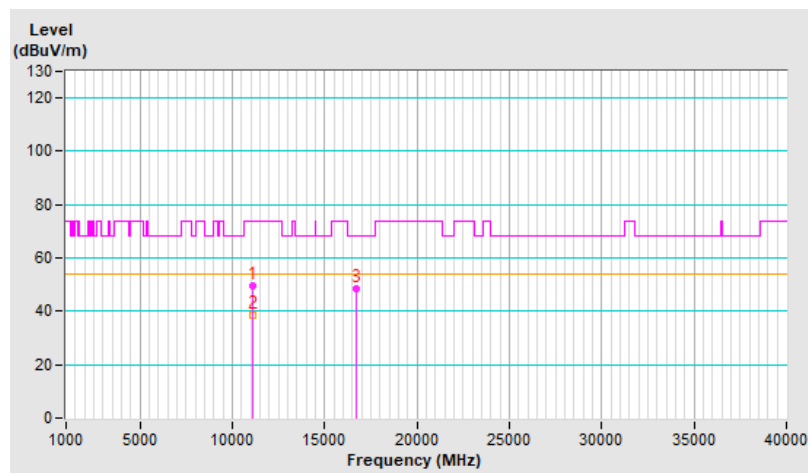




RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.6 PK	74.0	-24.4	1.94 V	214	32.9	16.7
2	11140.00	37.4 AV	54.0	-16.6	1.94 V	214	20.7	16.7
3	#16710.00	49.1 PK	68.2	-19.1	1.56 V	61	27.6	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

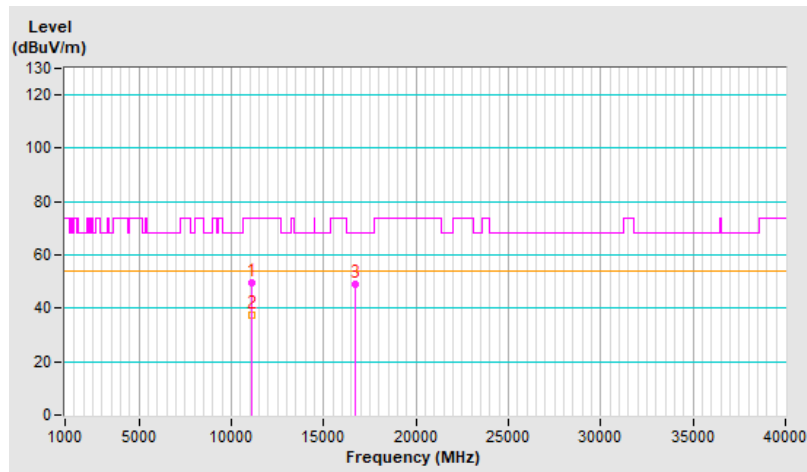


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.8 PK	74.0	-25.2	3.59 H	86	32.4	16.4
2	10640.00	36.2 AV	54.0	-17.8	3.59 H	86	19.8	16.4
3	15960.00	48.3 PK	74.0	-25.7	1.41 H	169	31.1	17.2
4	15960.00	37.6 AV	54.0	-16.4	1.41 H	169	20.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

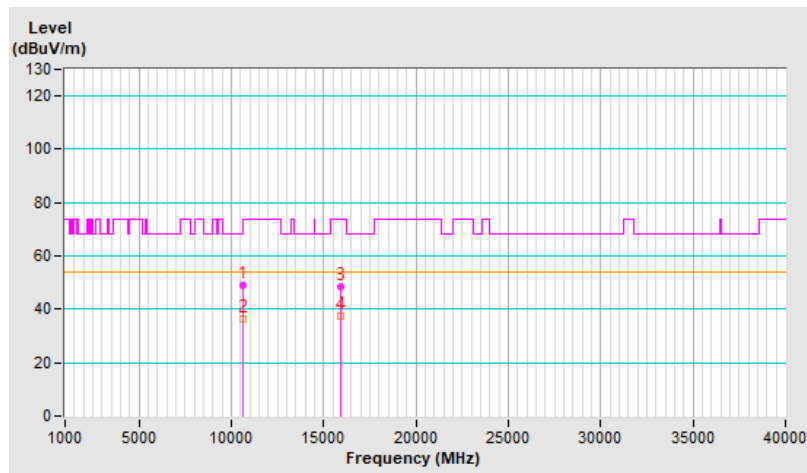




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.5 PK	74.0	-24.5	3.56 V	56	33.1	16.4
2	10640.00	36.7 AV	54.0	-17.3	3.56 V	56	20.3	16.4
3	15960.00	48.4 PK	74.0	-25.6	1.47 V	171	31.2	17.2
4	15960.00	37.5 AV	54.0	-16.5	1.47 V	171	20.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

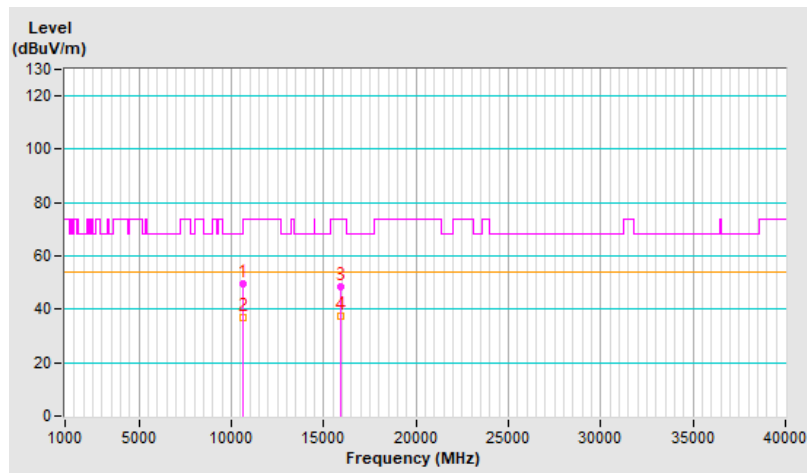


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	3.50 H	73	31.8	16.9
2	11000.00	37.5 AV	54.0	-16.5	3.50 H	73	20.6	16.9
3	#16500.00	49.4 PK	68.2	-18.8	1.40 H	188	29.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

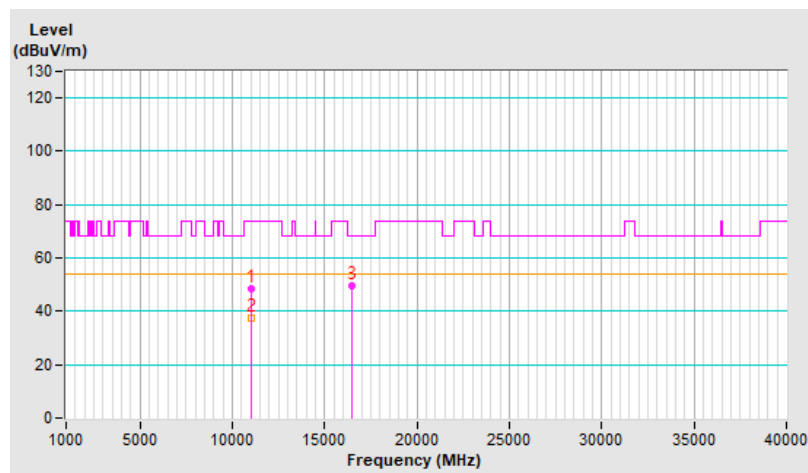


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.0 PK	74.0	-25.0	2.14 V	203	32.1	16.9
2	11000.00	37.2 AV	54.0	-16.8	2.14 V	203	20.3	16.9
3	#16500.00	50.0 PK	68.2	-18.2	1.60 V	26	30.4	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

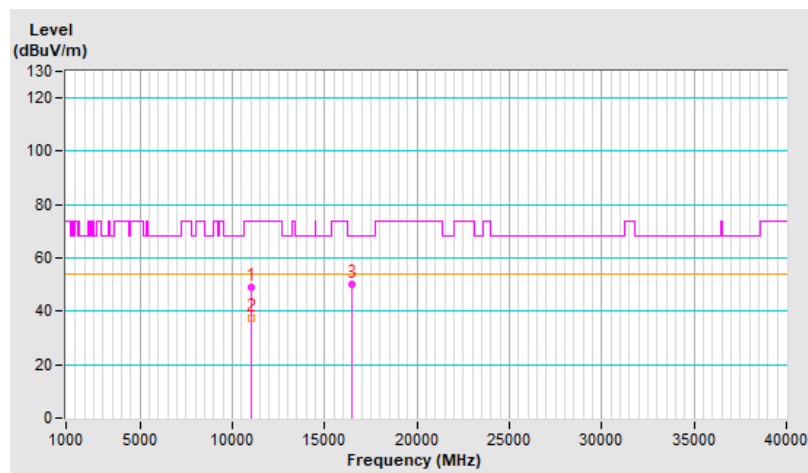


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	38.0 AV	54.0	-16.0	3.55 H	64	21.1	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

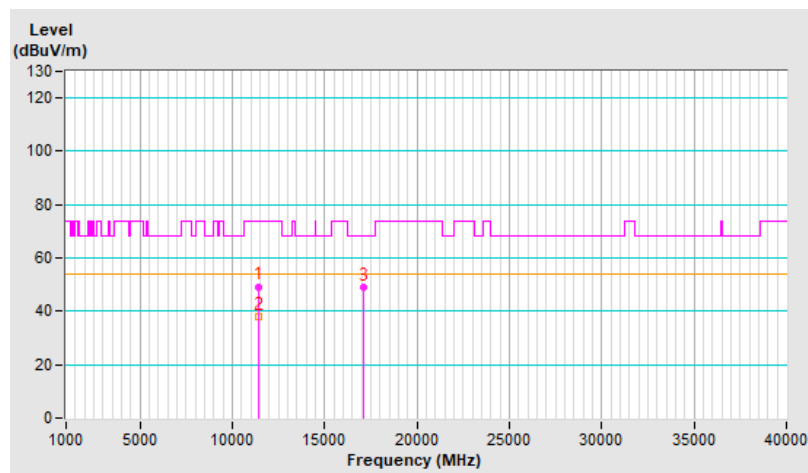




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.09 V	196	32.2	16.9
2	11400.00	37.7 AV	54.0	-16.3	2.09 V	196	20.8	16.9
3	#17100.00	49.2 PK	68.2	-19.0	1.59 V	38	29.0	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

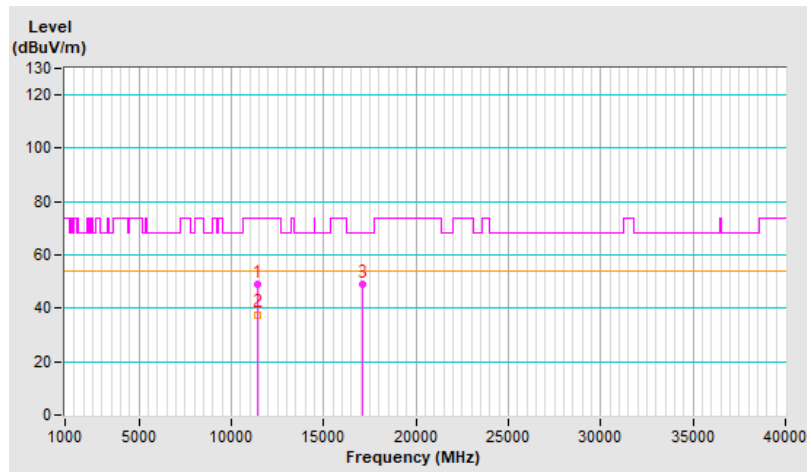


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	3.50 H	49	31.9	16.9
2	11440.00	37.5 AV	54.0	-16.5	3.50 H	49	20.6	16.9
3	#17160.00	48.8 PK	68.2	-19.4	1.44 H	175	28.8	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

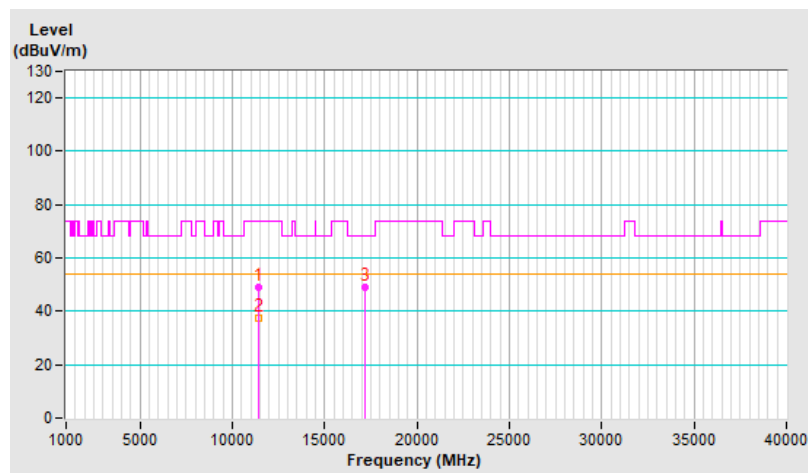


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	2.24 V	198	31.9	16.9
2	11440.00	37.4 AV	54.0	-16.6	2.24 V	198	20.5	16.9
3	#17160.00	48.4 PK	68.2	-19.8	1.54 V	0	28.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

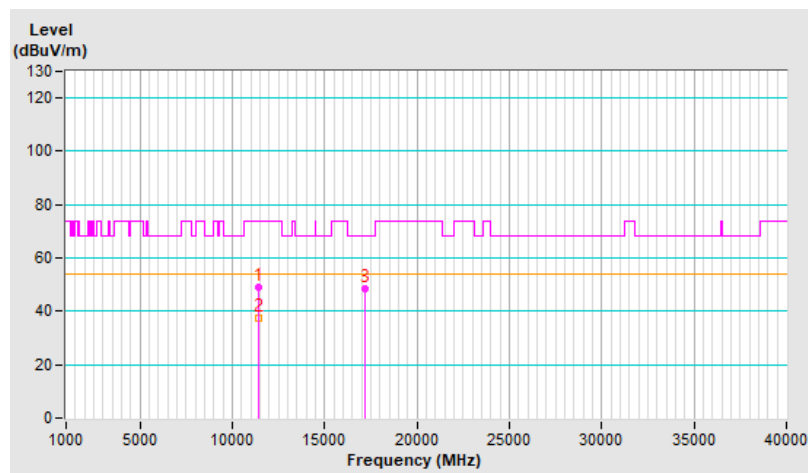


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.50 H	63	32.1	16.4
2	10640.00	36.8 AV	54.0	-17.2	3.50 H	63	20.4	16.4
3	15960.00	48.6 PK	74.0	-25.4	1.49 H	183	31.4	17.2
4	15960.00	37.5 AV	54.0	-16.5	1.49 H	183	20.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

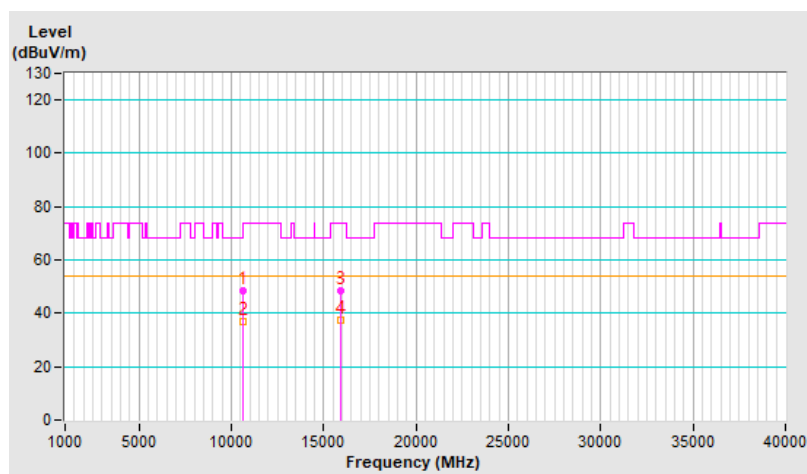


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.3 PK	74.0	-24.7	2.08 V	204	32.9	16.4
2	10640.00	36.7 AV	54.0	-17.3	2.08 V	204	20.3	16.4
3	15960.00	49.3 PK	74.0	-24.7	1.64 V	41	32.1	17.2
4	15960.00	37.4 AV	54.0	-16.6	1.64 V	41	20.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

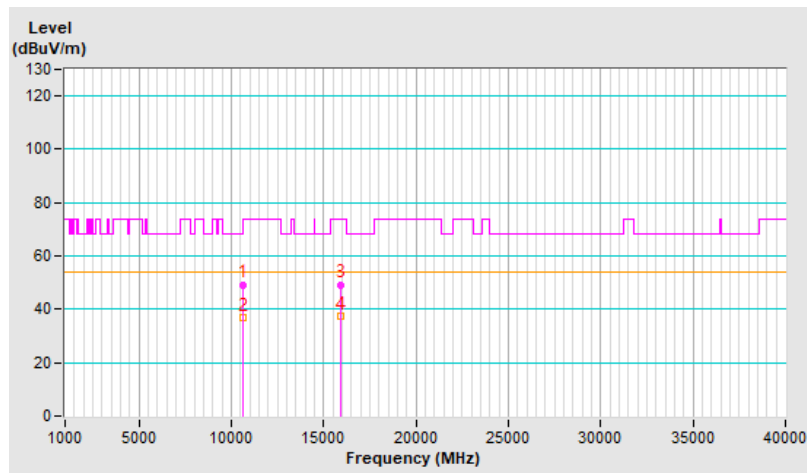


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.0 PK	74.0	-25.0	3.50 H	33	32.1	16.9
2	11000.00	37.5 AV	54.0	-16.5	3.50 H	33	20.6	16.9
3	#16500.00	48.7 PK	68.2	-19.5	1.46 H	178	29.1	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

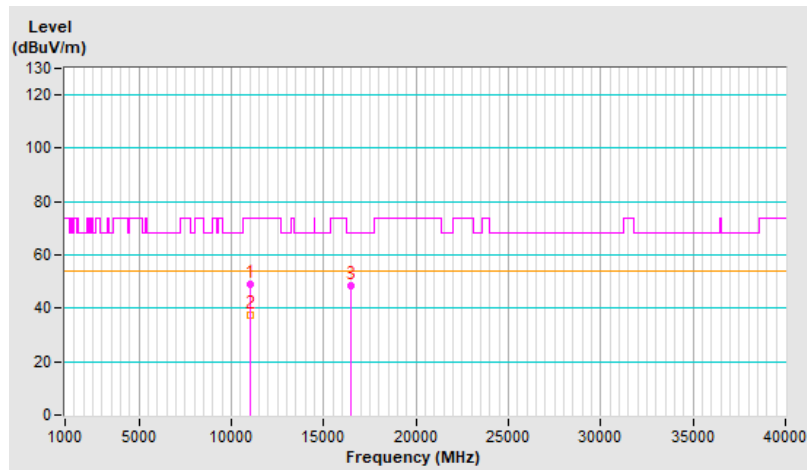


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	2.13 V	210	31.8	16.9
2	11000.00	37.4 AV	54.0	-16.6	2.13 V	210	20.5	16.9
3	#16500.00	48.9 PK	68.2	-19.3	1.69 V	34	29.3	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

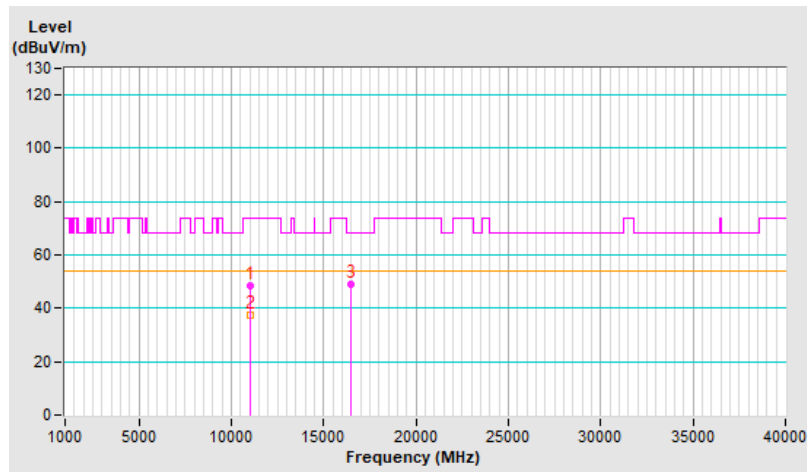




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	37.6 AV	54.0	-16.4	3.55 H	64	20.7	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

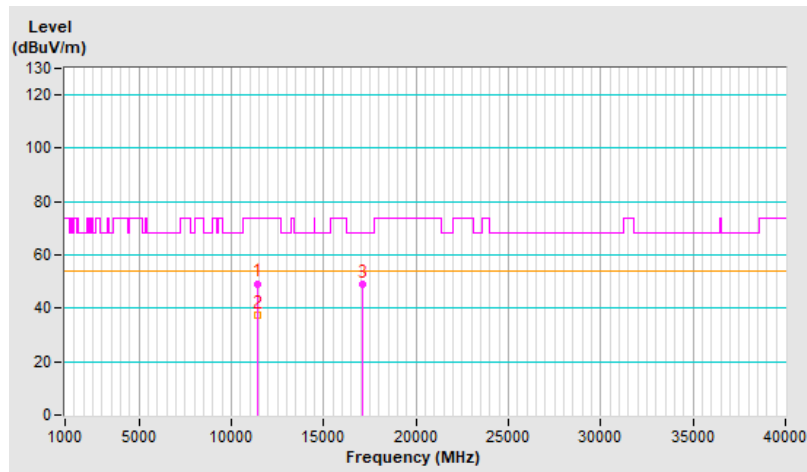


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.7 PK	74.0	-25.3	2.02 V	217	31.8	16.9
2	11400.00	37.2 AV	54.0	-16.8	2.02 V	217	20.3	16.9
3	#17100.00	49.9 PK	68.2	-18.3	1.62 V	26	29.7	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

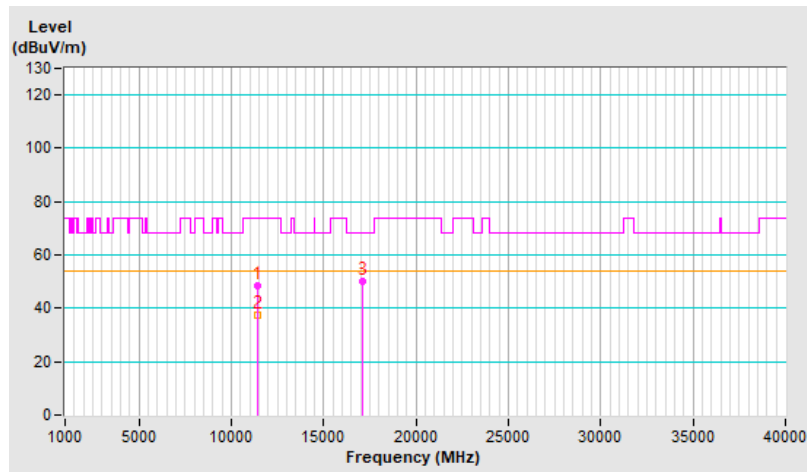


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.7 PK	74.0	-24.3	3.51 H	70	32.8	16.9
2	11440.00	37.5 AV	54.0	-16.5	3.51 H	70	20.6	16.9
3	#17160.00	48.7 PK	68.2	-19.5	1.35 H	180	28.7	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

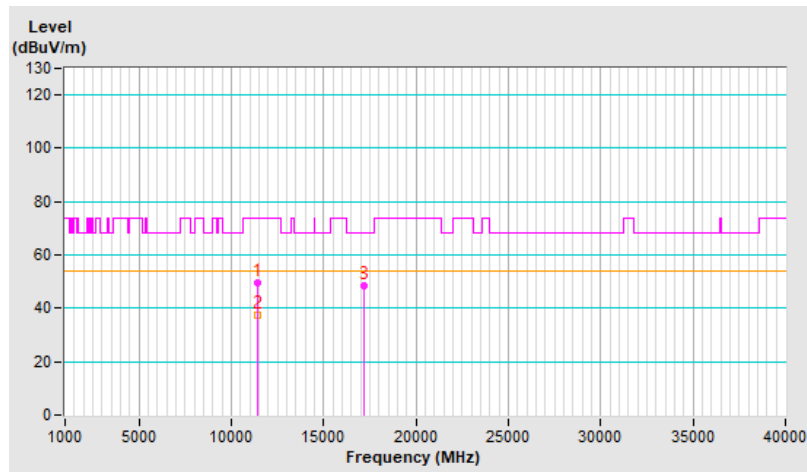




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.7 PK	74.0	-25.3	2.13 V	202	31.8	16.9
2	11440.00	37.7 AV	54.0	-16.3	2.13 V	202	20.8	16.9
3	#17160.00	48.4 PK	68.2	-19.8	1.54 V	41	28.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

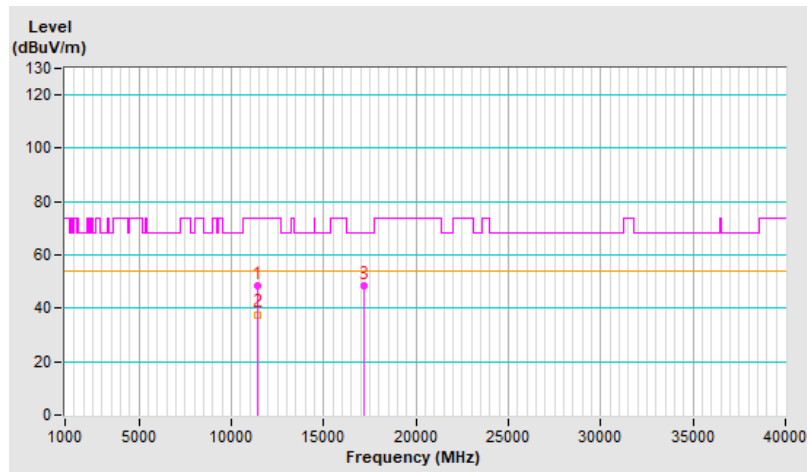


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.54 H	75	32.1	16.4
2	10640.00	36.5 AV	54.0	-17.5	3.54 H	75	20.1	16.4
3	15960.00	48.5 PK	74.0	-25.5	1.44 H	177	31.3	17.2
4	15960.00	37.6 AV	54.0	-16.4	1.44 H	177	20.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

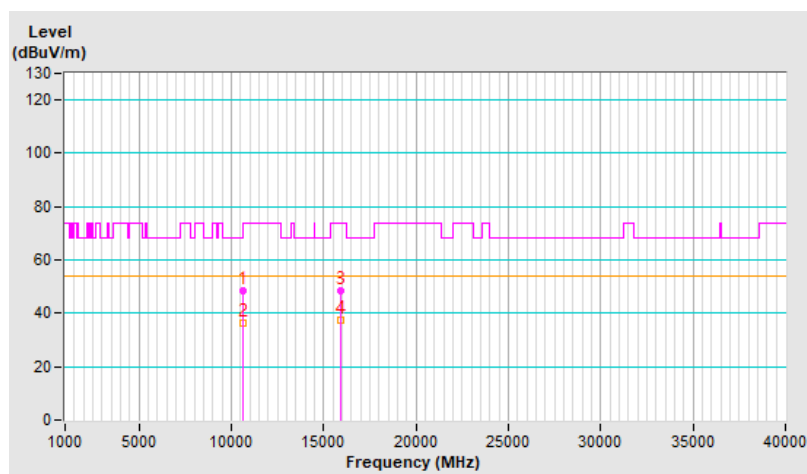


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.1 PK	74.0	-25.9	2.05 V	216	31.7	16.4
2	10640.00	36.7 AV	54.0	-17.3	2.05 V	216	20.3	16.4
3	15960.00	48.9 PK	74.0	-25.1	1.51 V	37	31.7	17.2
4	15960.00	37.4 AV	54.0	-16.6	1.51 V	37	20.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

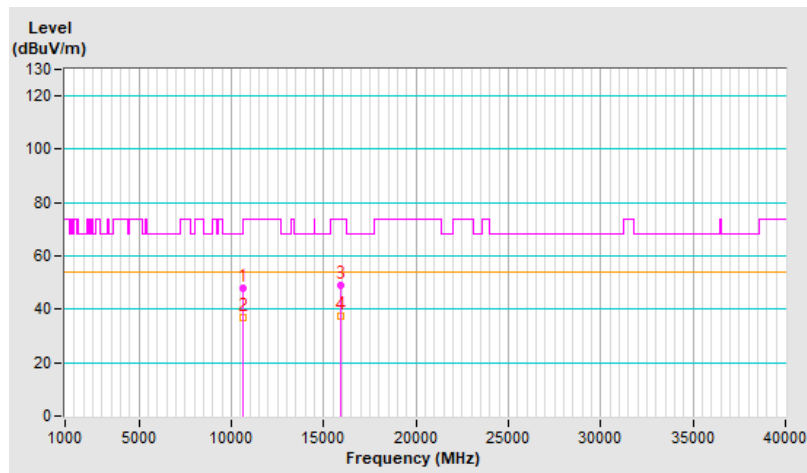


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	3.52 H	60	31.5	16.9
2	11000.00	37.3 AV	54.0	-16.7	3.52 H	60	20.4	16.9
3	#16500.00	48.4 PK	68.2	-19.8	1.46 H	173	28.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

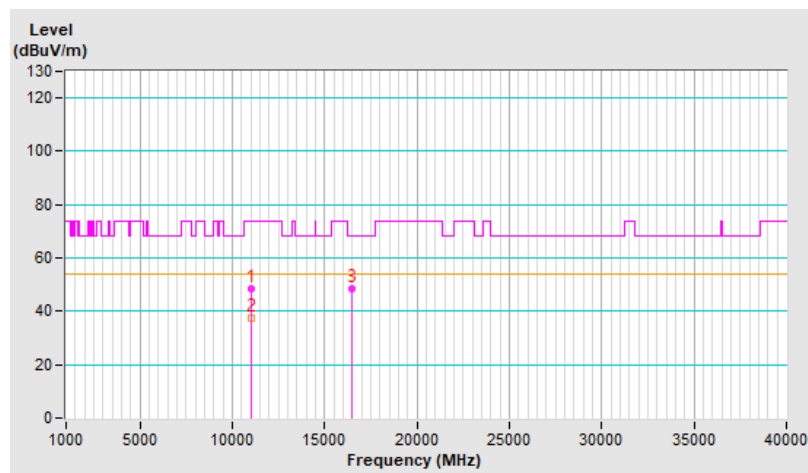




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.4 PK	74.0	-25.6	2.04 V	200	31.5	16.9
2	11000.00	37.2 AV	54.0	-16.8	2.04 V	200	20.3	16.9
3	#16500.00	48.8 PK	68.2	-19.4	1.53 V	34	29.2	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

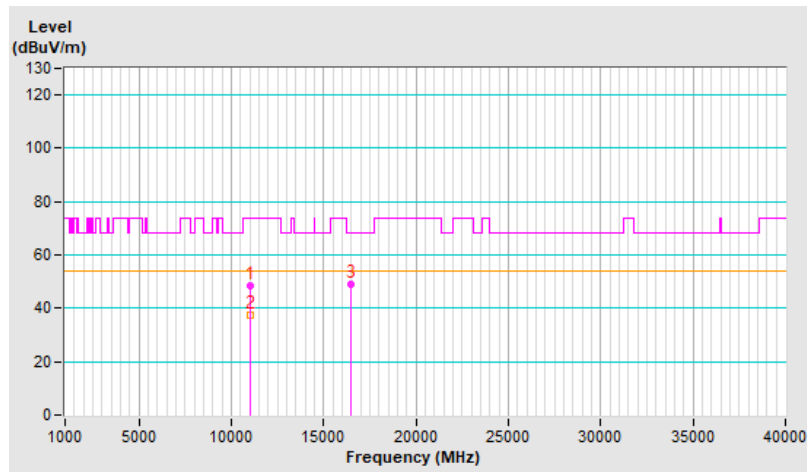


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	38.0 AV	54.0	-16.0	3.55 H	64	21.1	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

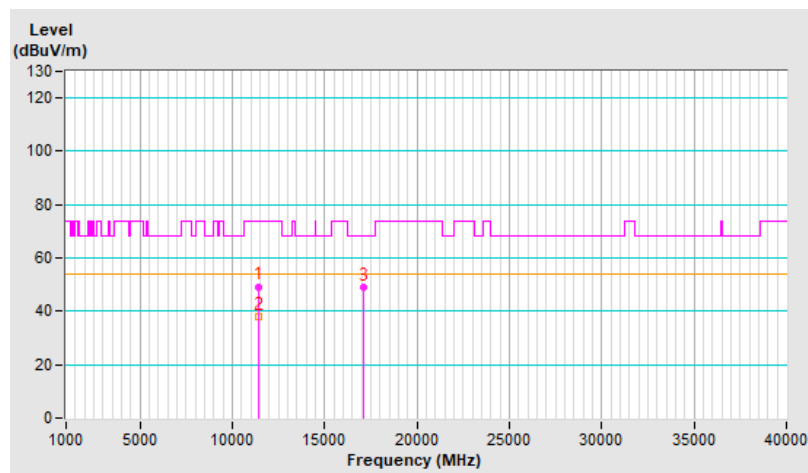




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.09 V	196	32.2	16.9
2	11400.00	37.7 AV	54.0	-16.3	2.09 V	196	20.8	16.9
3	#17100.00	49.2 PK	68.2	-19.0	1.59 V	38	29.0	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

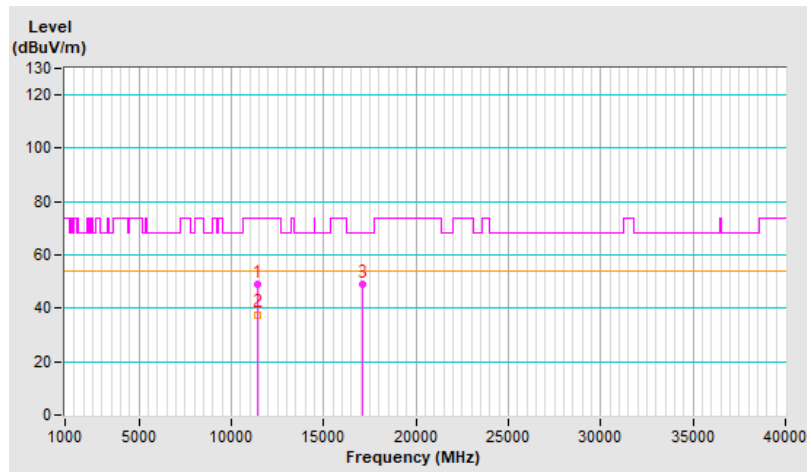


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.6 PK	74.0	-25.4	3.49 H	46	31.7	16.9
2	11440.00	37.5 AV	54.0	-16.5	3.49 H	46	20.6	16.9
3	#17160.00	48.4 PK	68.2	-19.8	1.46 H	168	28.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

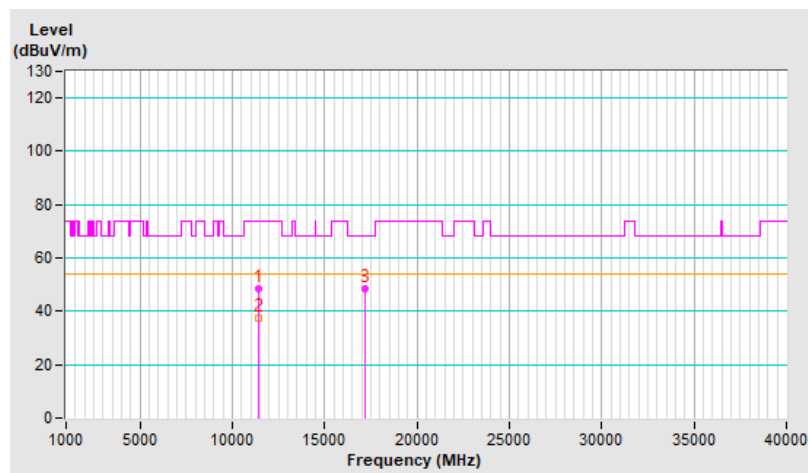




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.8 PK	74.0	-25.2	2.04 V	208	31.9	16.9
2	11440.00	38.1 AV	54.0	-15.9	2.04 V	208	21.2	16.9
3	#17160.00	49.3 PK	68.2	-18.9	1.52 V	49	29.3	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

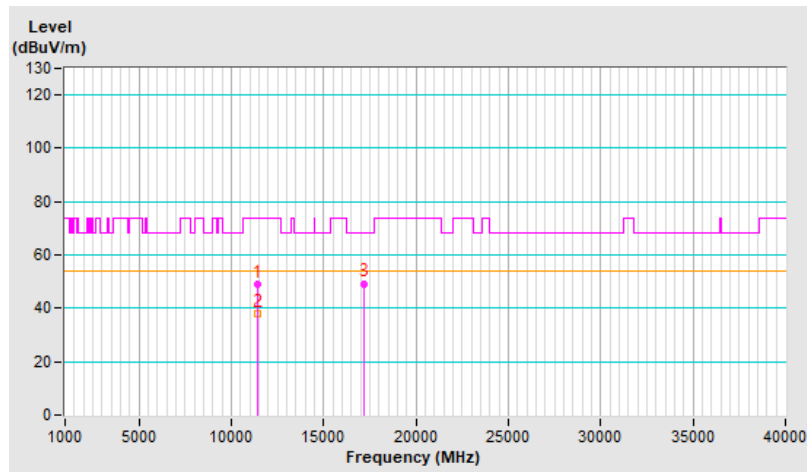


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.50 H	63	32.1	16.4
2	10640.00	36.7 AV	54.0	-17.3	3.50 H	63	20.3	16.4
3	15960.00	48.6 PK	74.0	-25.4	1.49 H	183	31.4	17.2
4	15960.00	37.9 AV	54.0	-16.1	1.49 H	183	20.7	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

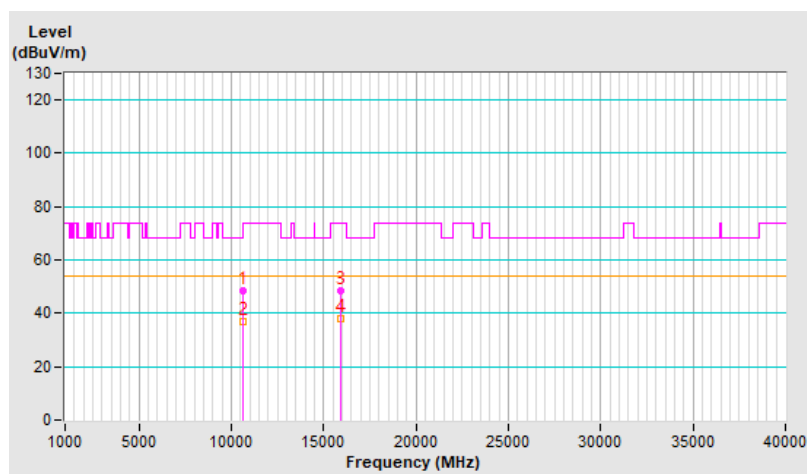


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.3 PK	74.0	-24.7	1.99 V	223	32.9	16.4
2	10640.00	36.4 AV	54.0	-17.6	1.99 V	223	20.0	16.4
3	15960.00	48.7 PK	74.0	-25.3	1.59 V	27	31.5	17.2
4	15960.00	37.8 AV	54.0	-16.2	1.59 V	27	20.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

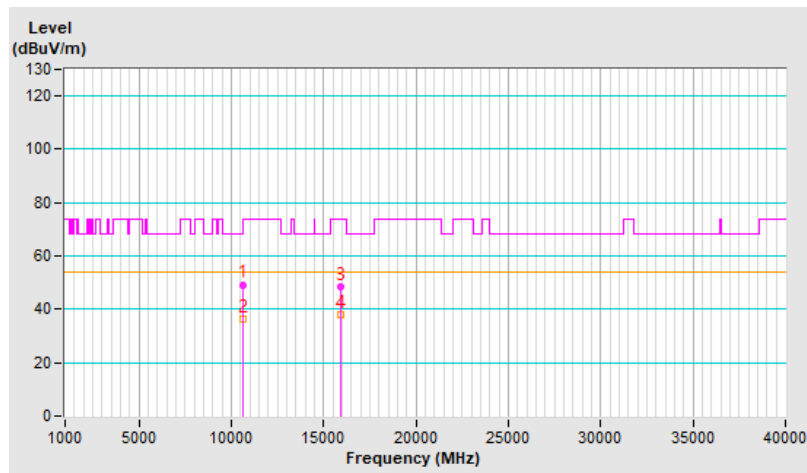




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.5 PK	74.0	-25.5	3.55 H	55	31.6	16.9
2	11000.00	37.7 AV	54.0	-16.3	3.55 H	55	20.8	16.9
3	#16500.00	48.4 PK	68.2	-19.8	1.46 H	170	28.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

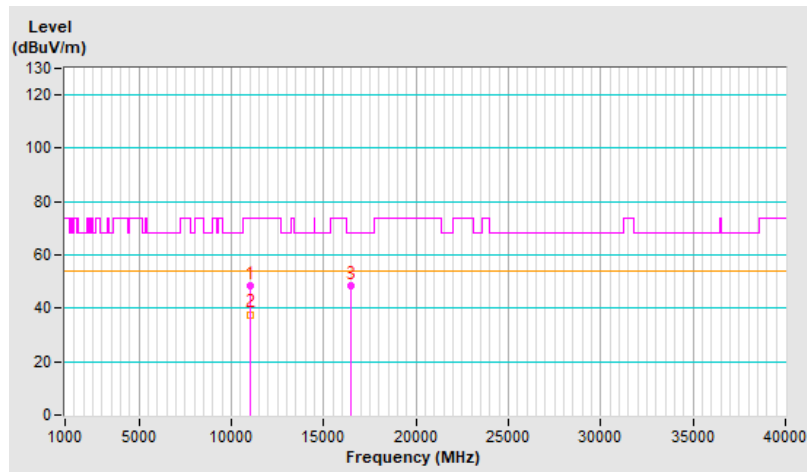


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.6 PK	74.0	-25.4	1.98 V	231	31.7	16.9
2	11000.00	37.2 AV	54.0	-16.8	1.98 V	231	20.3	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.57 V	40	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

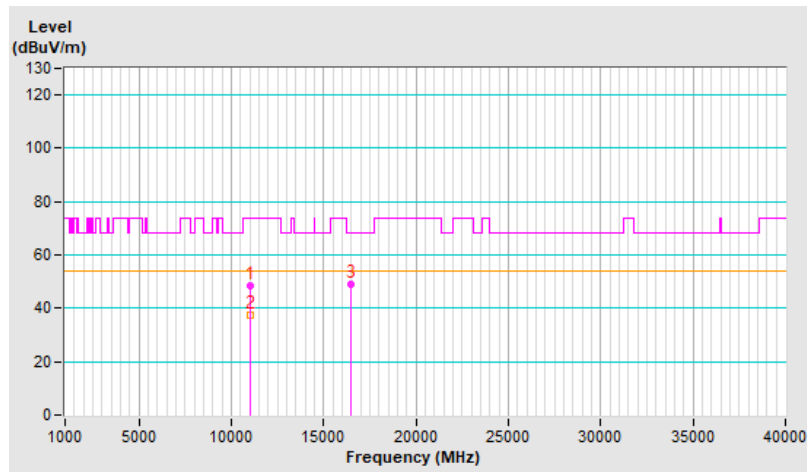


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.8 PK	74.0	-25.2	3.51 H	56	31.9	16.9
2	11400.00	37.5 AV	54.0	-16.5	3.51 H	56	20.6	16.9
3	#17100.00	48.8 PK	68.2	-19.4	1.48 H	179	28.6	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

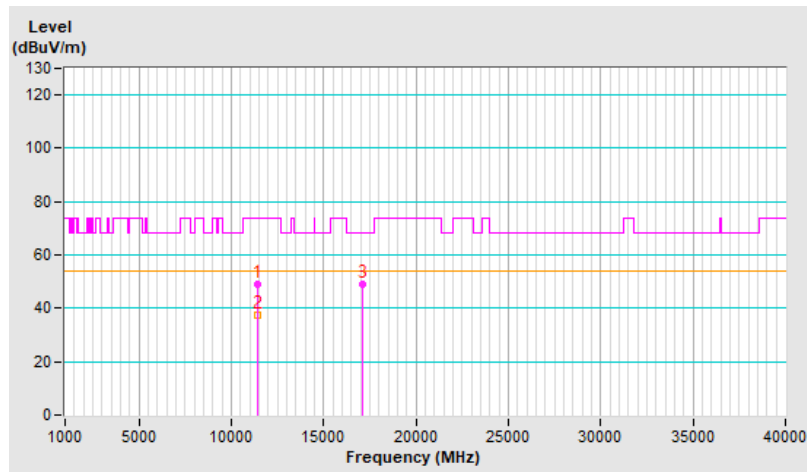


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	48.8 PK	74.0	-25.2	2.17 V	214	31.9	16.9
2	11400.00	37.2 AV	54.0	-16.8	2.17 V	214	20.3	16.9
3	#17100.00	48.0 PK	68.2	-20.2	1.68 V	26	27.8	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

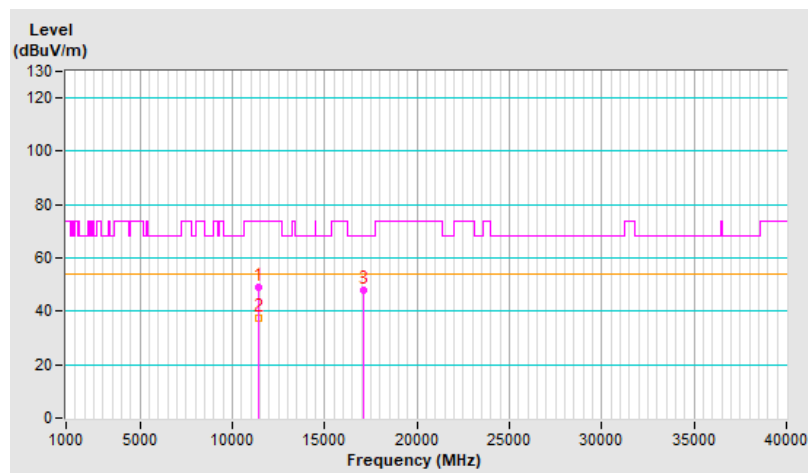


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.1 PK	74.0	-25.9	3.41 H	43	31.2	16.9
2	11440.00	37.3 AV	54.0	-16.7	3.41 H	43	20.4	16.9
3	#17160.00	48.8 PK	68.2	-19.4	1.52 H	170	28.8	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

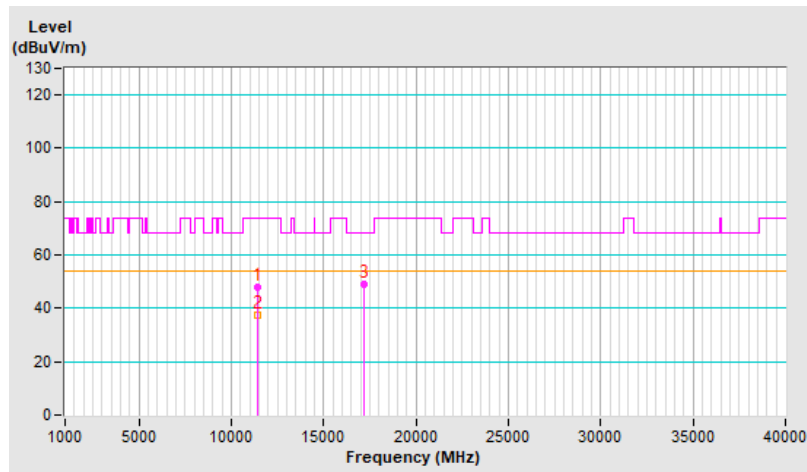


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	52.0 PK	74.0	-22.0	2.18 V	187	35.1	16.9
2	11440.00	38.5 AV	54.0	-15.5	2.18 V	187	21.6	16.9
3	#17160.00	48.1 PK	68.2	-20.1	1.86 V	117	28.1	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

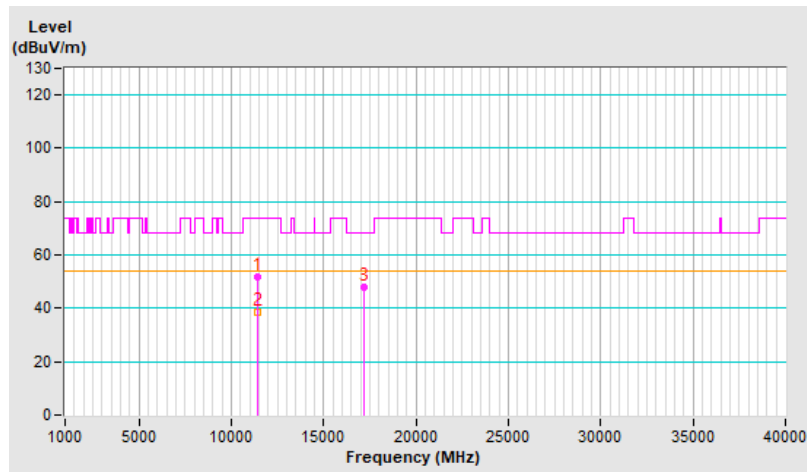


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	3.50 H	63	32.1	16.4
2	10640.00	36.5 AV	54.0	-17.5	3.50 H	63	20.1	16.4
3	15960.00	48.6 PK	74.0	-25.4	1.49 H	183	31.4	17.2
4	15960.00	37.5 AV	54.0	-16.5	1.49 H	183	20.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

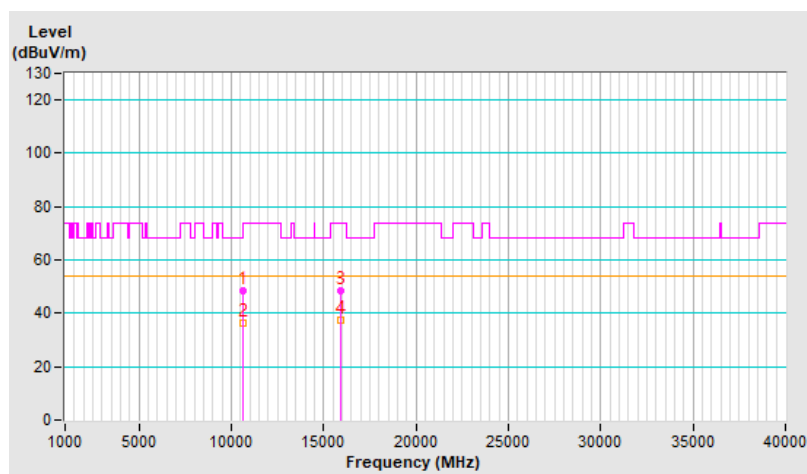


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	2.05 V	198	32.1	16.4
2	10640.00	37.1 AV	54.0	-16.9	2.05 V	198	20.7	16.4
3	15960.00	49.7 PK	74.0	-24.3	1.60 V	29	32.5	17.2
4	15960.00	37.3 AV	54.0	-16.7	1.60 V	29	20.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

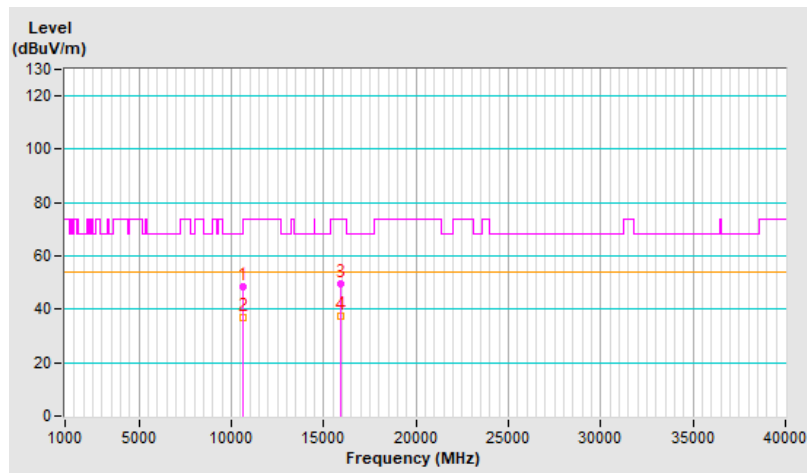


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.8 PK	74.0	-25.2	3.55 H	61	31.9	16.9
2	11000.00	37.5 AV	54.0	-16.5	3.55 H	61	20.6	16.9
3	#16500.00	48.7 PK	68.2	-19.5	1.47 H	180	29.1	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

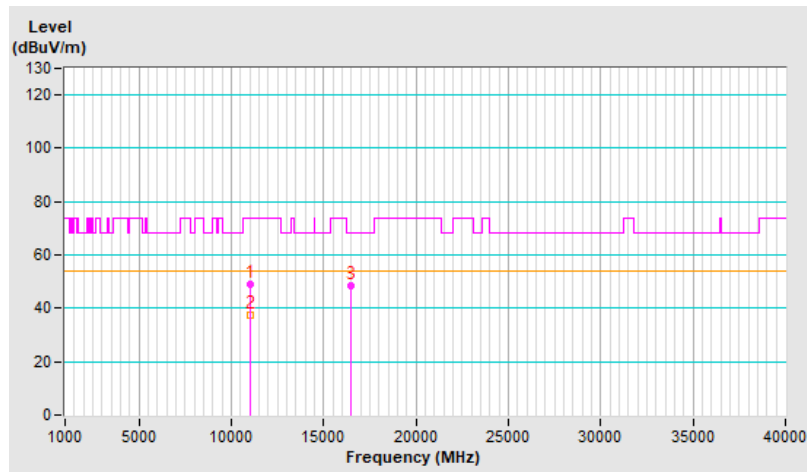


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.7 PK	74.0	-25.3	2.11 V	201	31.8	16.9
2	11000.00	37.4 AV	54.0	-16.6	2.11 V	201	20.5	16.9
3	#16500.00	50.0 PK	68.2	-18.2	1.62 V	42	30.4	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

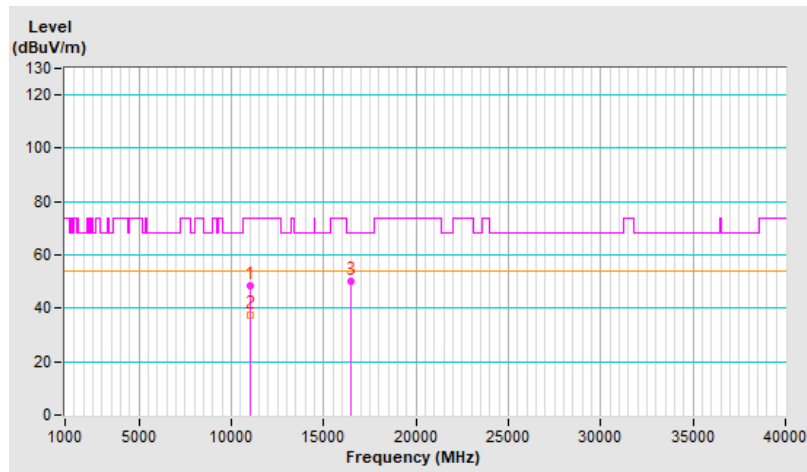


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	37.5 AV	54.0	-16.5	3.55 H	64	20.6	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

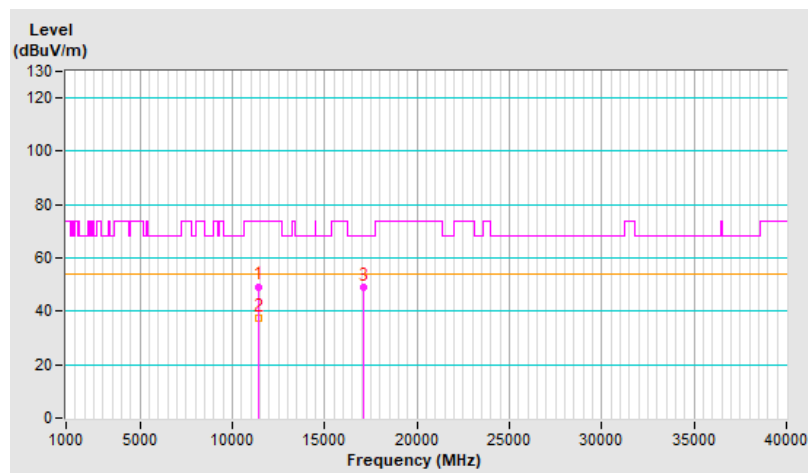


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.1 PK	74.0	-24.9	2.09 V	196	32.2	16.9
2	11400.00	37.7 AV	54.0	-16.3	2.09 V	196	20.8	16.9
3	#17100.00	49.2 PK	68.2	-19.0	1.59 V	38	29.0	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

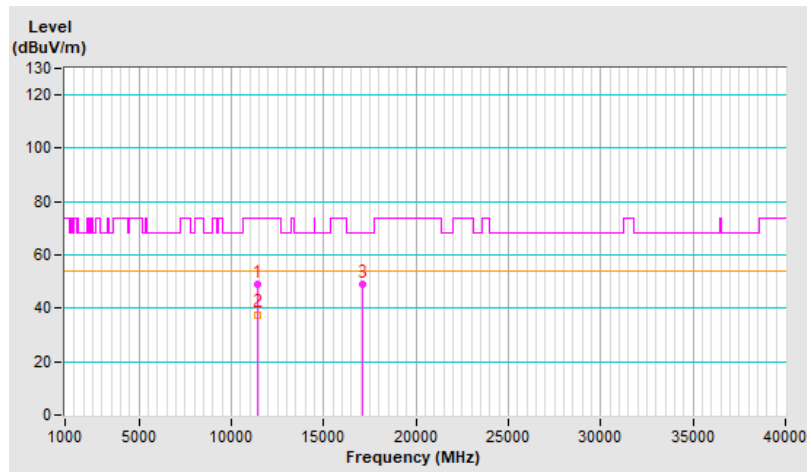


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	48.6 PK	74.0	-25.4	3.52 H	75	31.7	16.9
2	11440.00	37.4 AV	54.0	-16.6	3.52 H	75	20.5	16.9
3	#17160.00	48.7 PK	68.2	-19.5	1.42 H	183	28.7	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

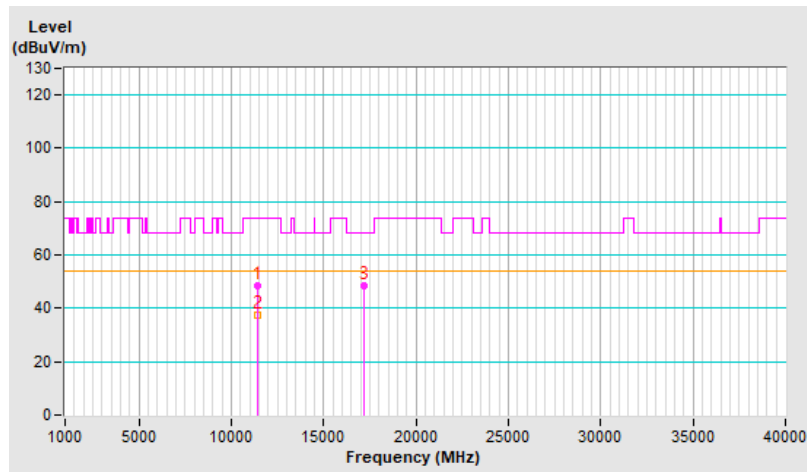


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.5 PK	74.0	-24.5	2.12 V	213	32.6	16.9
2	11440.00	37.8 AV	54.0	-16.2	2.12 V	213	20.9	16.9
3	#17160.00	48.5 PK	68.2	-19.7	1.61 V	13	28.5	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

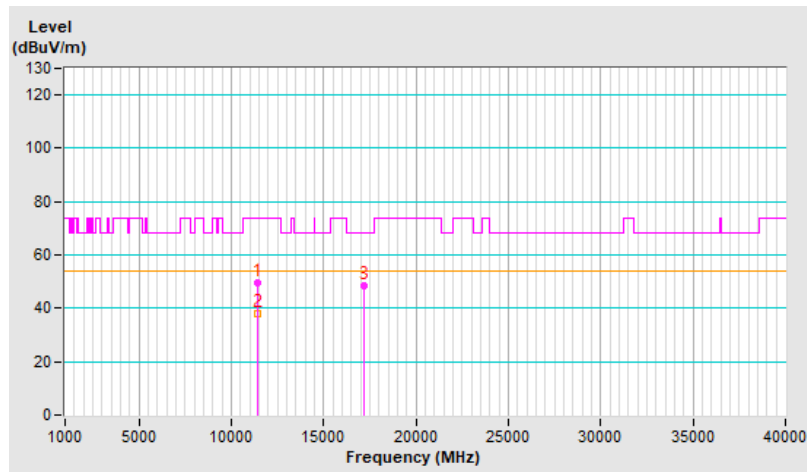


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.5 PK	68.2	-19.7	3.50 H	63	32.2	16.3
2	15870.00	48.6 PK	74.0	-25.4	1.49 H	183	31.3	17.3
3	15870.00	36.4 AV	54.0	-17.6	1.49 H	183	19.1	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

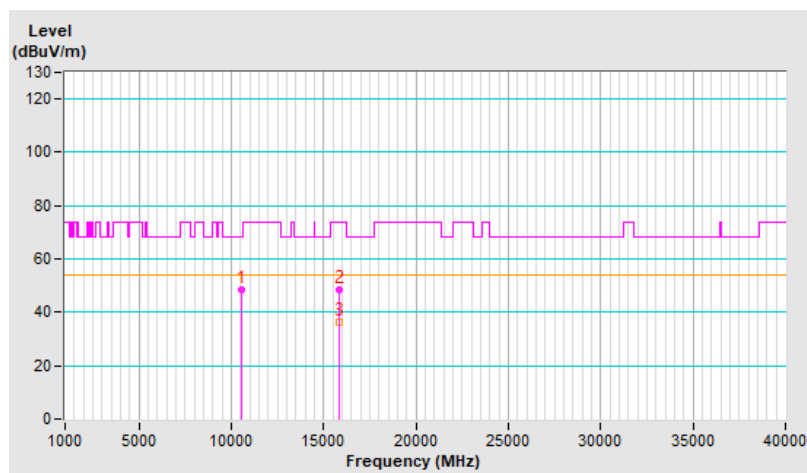




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.1 PK	68.2	-19.1	2.11 V	218	32.8	16.3
2	15870.00	49.5 PK	74.0	-24.5	1.62 V	36	32.2	17.3
3	15870.00	37.5 AV	54.0	-16.5	1.62 V	36	20.2	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

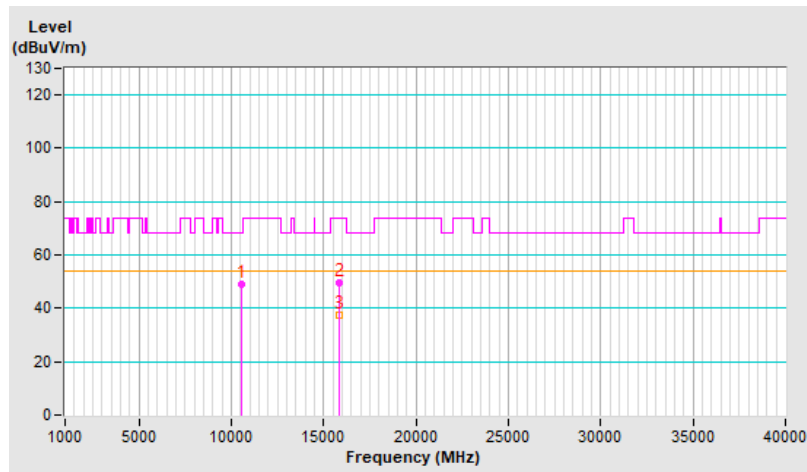




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	47.2 PK	74.0	-26.8	3.52 H	37	30.3	16.9
2	11060.00	37.8 AV	54.0	-16.2	3.52 H	37	20.9	16.9
3	#16590.00	48.4 PK	68.2	-19.8	1.58 H	167	28.0	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

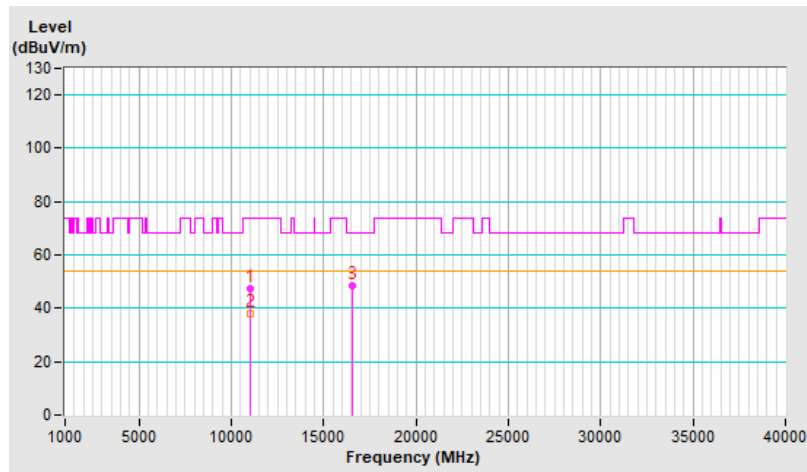


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.4 PK	74.0	-24.6	2.10 V	192	32.5	16.9
2	11060.00	37.9 AV	54.0	-16.1	2.10 V	192	21.0	16.9
3	#16590.00	49.0 PK	68.2	-19.2	1.63 V	43	28.6	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

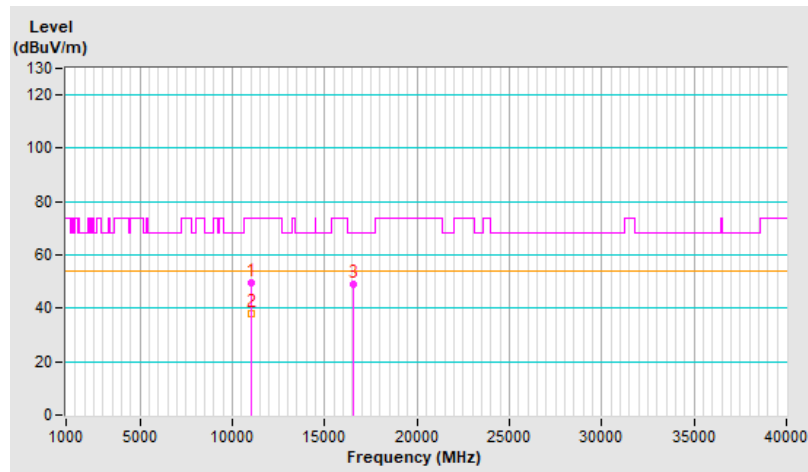


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.9 PK	74.0	-24.1	3.51 H	52	32.9	17.0
2	11380.00	38.3 AV	54.0	-15.7	3.51 H	52	21.3	17.0
3	#17070.00	49.3 PK	68.2	-18.9	1.36 H	193	28.9	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

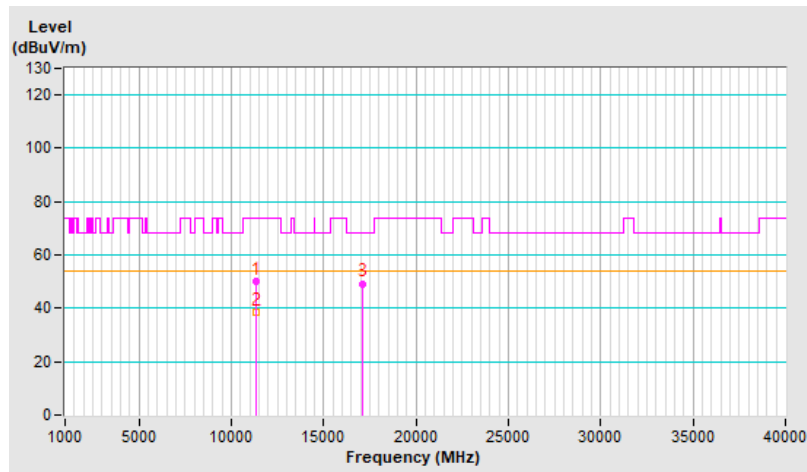


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	49.0 PK	74.0	-25.0	1.98 V	207	32.0	17.0
2	11380.00	38.2 AV	54.0	-15.8	1.98 V	207	21.2	17.0
3	#17070.00	49.0 PK	68.2	-19.2	1.55 V	33	28.6	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

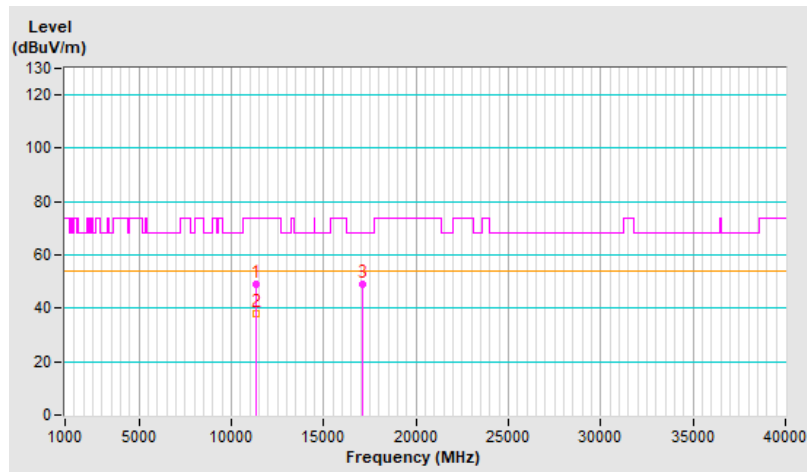




RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.9 PK	68.2	-19.3	3.48 H	51	33.0	15.9
2	15750.00	49.5 PK	74.0	-24.5	1.40 H	165	32.3	17.2
3	15750.00	36.2 AV	54.0	-17.8	1.40 H	165	19.0	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

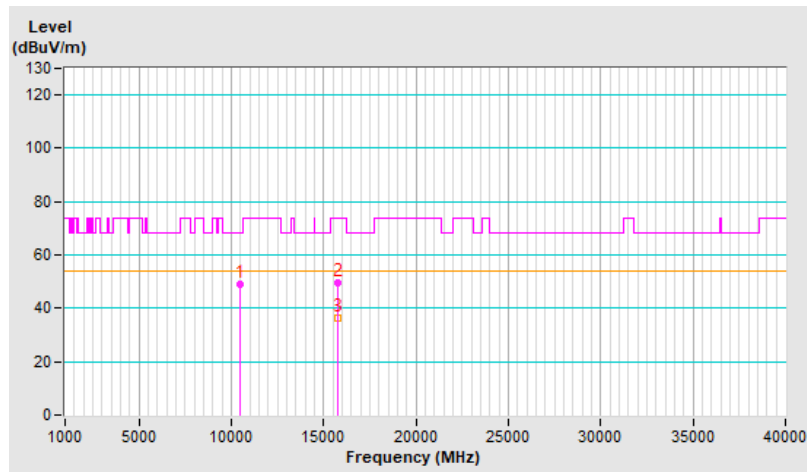


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.9 PK	68.2	-19.3	2.07 V	215	33.0	15.9
2	15750.00	48.8 PK	74.0	-25.2	1.57 V	40	31.6	17.2
3	15750.00	36.5 AV	54.0	-17.5	1.57 V	40	19.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

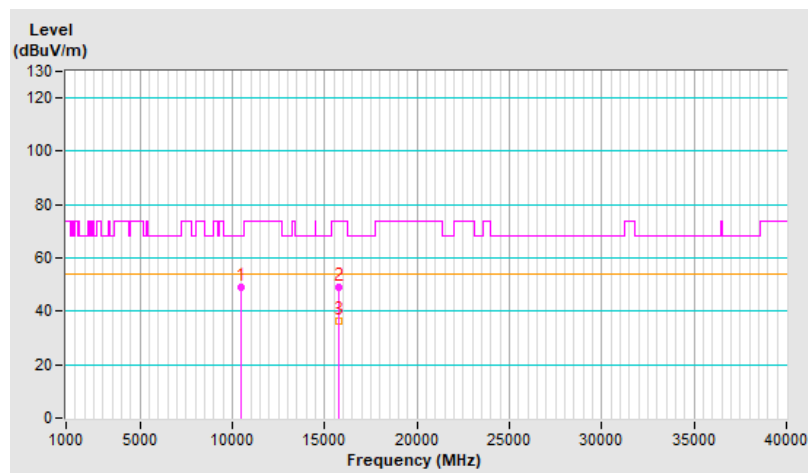


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.3 PK	74.0	-25.7	3.48 H	43	31.6	16.7
2	11140.00	37.2 AV	54.0	-16.8	3.48 H	43	20.5	16.7
3	#16710.00	50.0 PK	68.2	-18.2	1.39 H	177	28.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

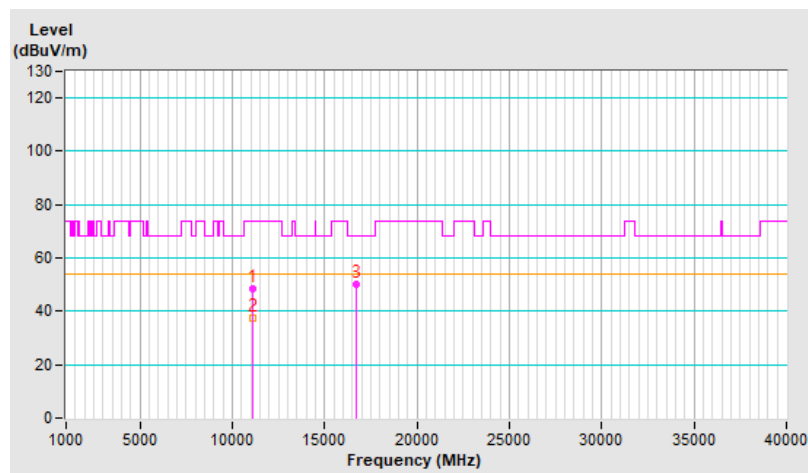


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.6 PK	74.0	-25.4	2.07 V	218	31.9	16.7
2	11140.00	37.2 AV	54.0	-16.8	2.07 V	218	20.5	16.7
3	#16710.00	48.8 PK	68.2	-19.4	1.57 V	33	27.3	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

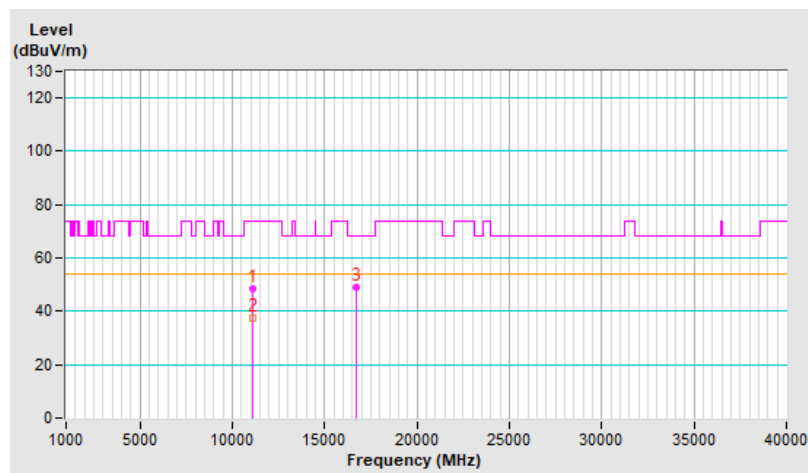




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	50.4 PK	68.2	-17.8	3.50 H	47	34.5	15.9
2	15750.00	50.6 PK	74.0	-23.4	1.46 H	158	33.4	17.2
3	15750.00	35.5 AV	54.0	-18.5	1.46 H	158	18.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

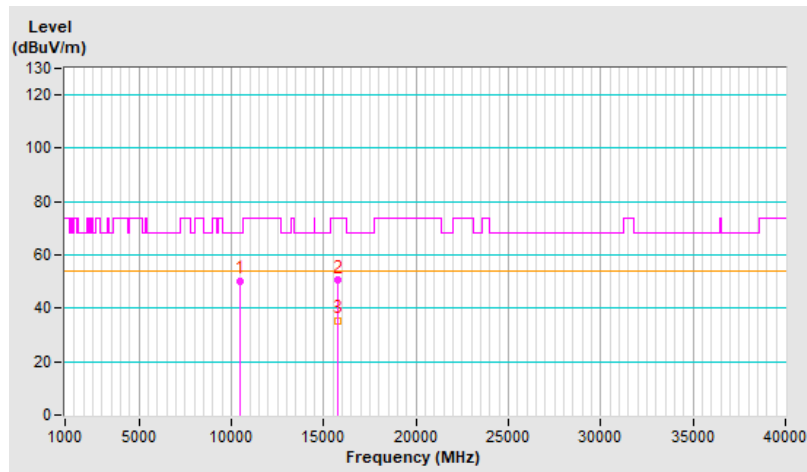


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.4 PK	68.2	-18.8	2.05 V	241	33.5	15.9
2	15750.00	49.4 PK	74.0	-24.6	1.58 V	28	32.2	17.2
3	15750.00	37.1 AV	54.0	-16.9	1.58 V	28	19.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

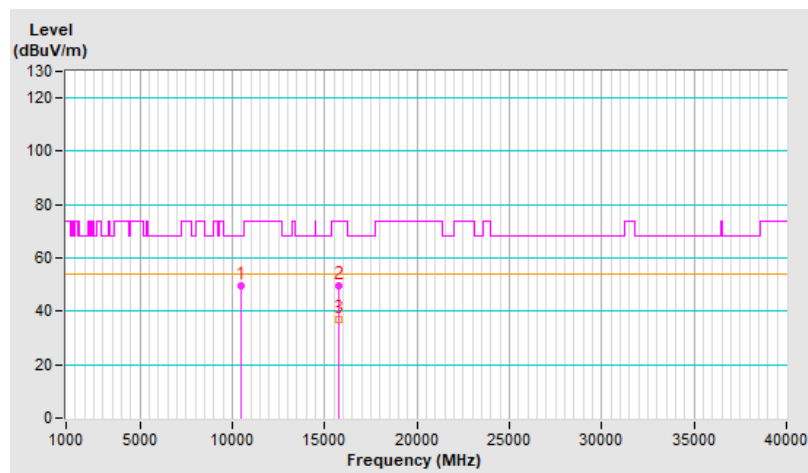




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.2 PK	74.0	-24.8	3.43 H	36	32.5	16.7
2	11140.00	37.8 AV	54.0	-16.2	3.43 H	36	21.1	16.7
3	#16710.00	49.0 PK	68.2	-19.2	1.40 H	164	27.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

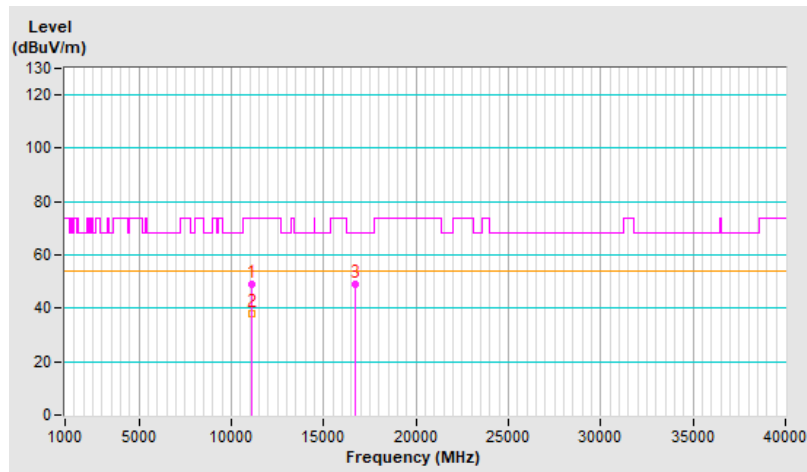




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.8 PK	74.0	-25.2	2.07 V	214	32.1	16.7
2	11140.00	37.2 AV	54.0	-16.8	2.07 V	214	20.5	16.7
3	#16710.00	48.8 PK	68.2	-19.4	1.60 V	29	27.3	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "# # ": The radiated frequency is out of the restricted band.

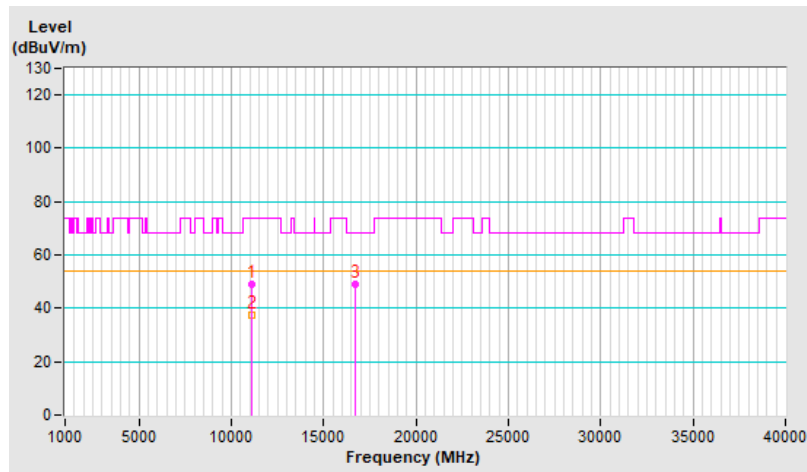

Mode B
2S2T


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.8 PK	68.2	-19.4	3.44 H	59	32.9	15.9
2	15780.00	49.4 PK	74.0	-24.6	1.50 H	178	32.3	17.1
3	15780.00	38.2 AV	54.0	-15.8	1.50 H	178	21.1	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

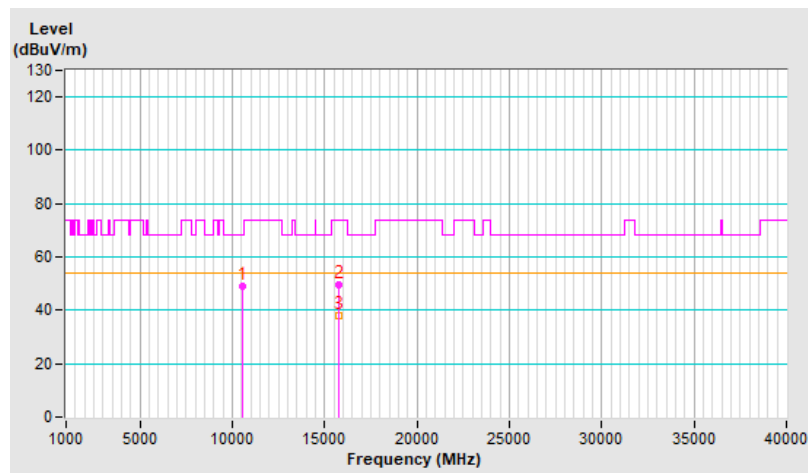


RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	48.3 PK	68.2	-19.9	2.10 V	209	32.4	15.9
2	15780.00	49.0 PK	74.0	-25.0	1.54 V	40	31.9	17.1
3	15780.00	37.8 AV	54.0	-16.2	1.54 V	40	20.7	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

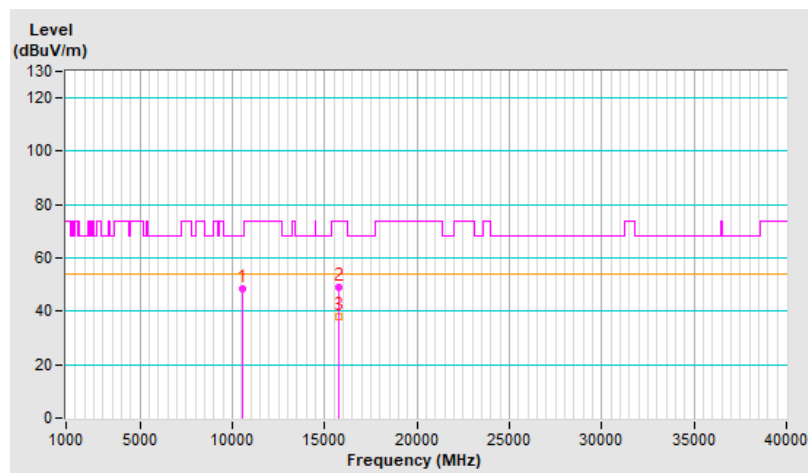


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.5 PK	74.0	-25.5	3.47 H	46	32.2	16.3
2	10600.00	37.6 AV	54.0	-16.4	3.47 H	46	21.3	16.3
3	15900.00	49.2 PK	74.0	-24.8	1.49 H	163	31.8	17.4
4	15900.00	37.9 AV	54.0	-16.1	1.49 H	163	20.5	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

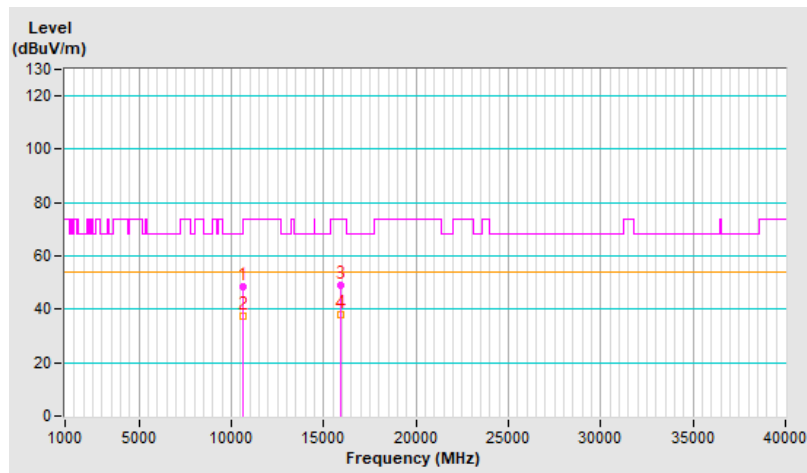


RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	48.2 PK	74.0	-25.8	2.15 V	192	31.9	16.3
2	10600.00	37.6 AV	54.0	-16.4	2.15 V	192	21.3	16.3
3	15900.00	49.4 PK	74.0	-24.6	1.52 V	46	32.0	17.4
4	15900.00	38.2 AV	54.0	-15.8	1.52 V	46	20.8	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

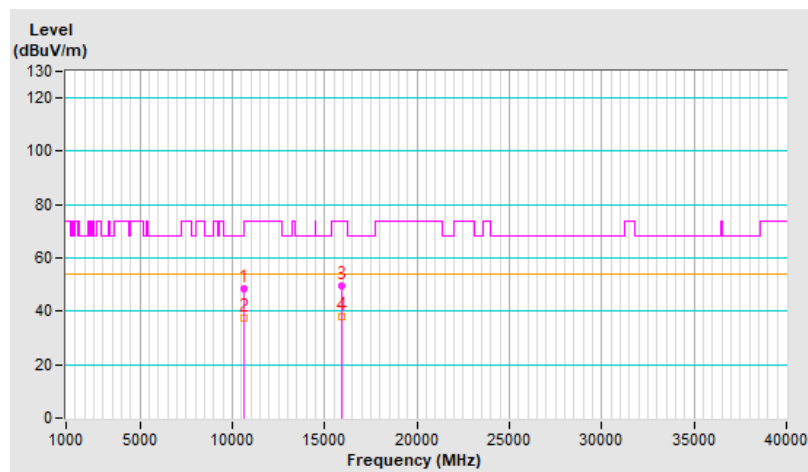


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.3 PK	74.0	-24.7	3.38 H	62	32.9	16.4
2	10640.00	37.5 AV	54.0	-16.5	3.38 H	62	21.1	16.4
3	15960.00	48.0 PK	74.0	-26.0	1.53 H	181	30.8	17.2
4	15960.00	38.6 AV	54.0	-15.4	1.53 H	181	21.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

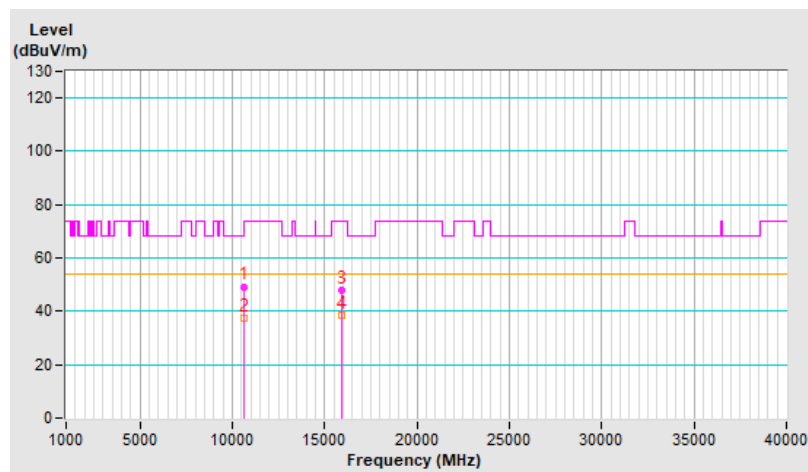


RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.6 PK	74.0	-25.4	2.13 V	204	32.2	16.4
2	10640.00	37.9 AV	54.0	-16.1	2.13 V	204	21.5	16.4
3	15960.00	49.9 PK	74.0	-24.1	1.62 V	62	32.7	17.2
4	15960.00	38.5 AV	54.0	-15.5	1.62 V	62	21.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

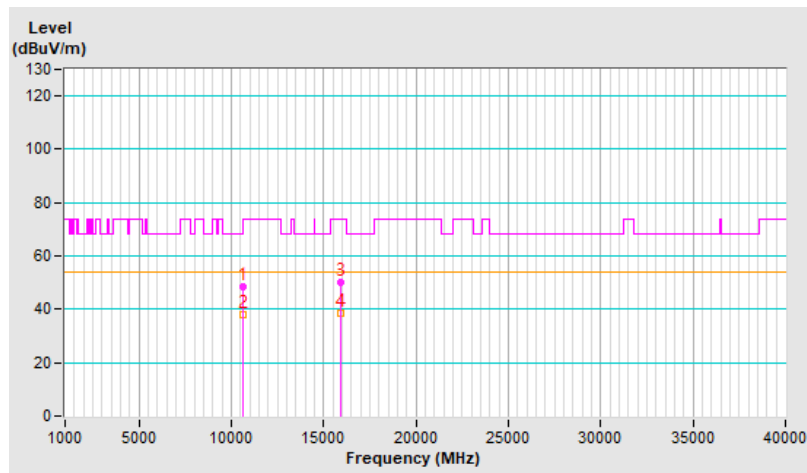


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.0 PK	74.0	-25.0	3.41 H	69	32.1	16.9
2	11000.00	38.4 AV	54.0	-15.6	3.41 H	69	21.5	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.41 H	171	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

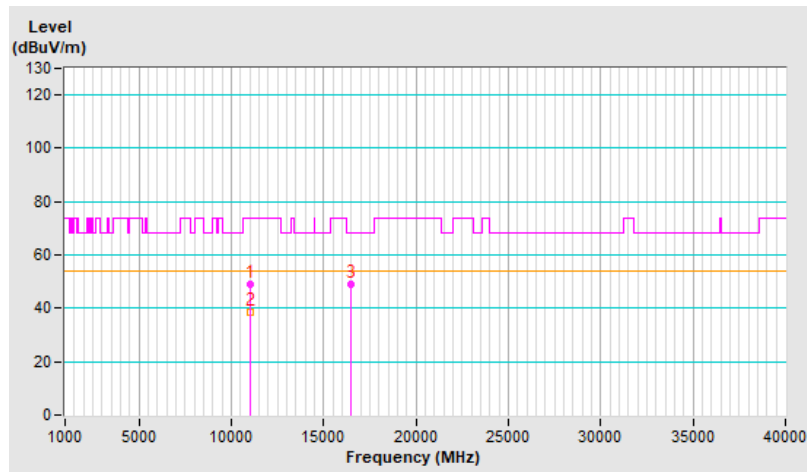


RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.4 PK	74.0	-24.6	2.15 V	193	32.5	16.9
2	11000.00	38.6 AV	54.0	-15.4	2.15 V	193	21.7	16.9
3	#16500.00	48.7 PK	68.2	-19.5	1.58 V	49	29.1	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

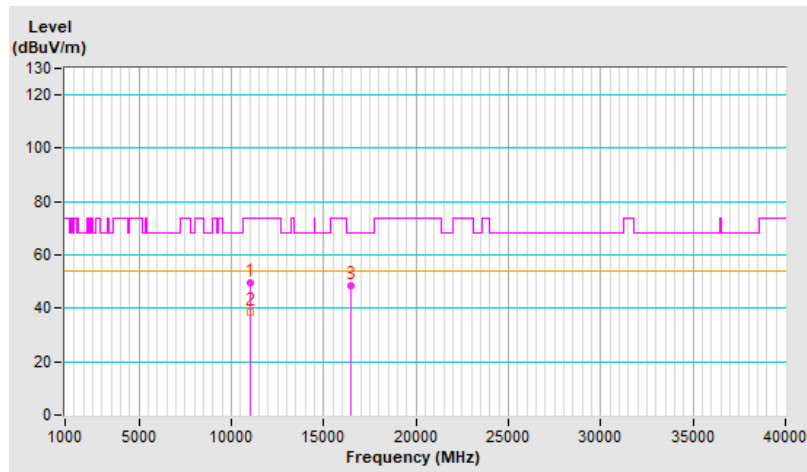


RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.0 PK	74.0	-25.0	3.37 H	57	32.4	16.6
2	11160.00	38.6 AV	54.0	-15.4	3.37 H	57	22.0	16.6
3	#16740.00	48.9 PK	68.2	-19.3	1.38 H	174	27.6	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

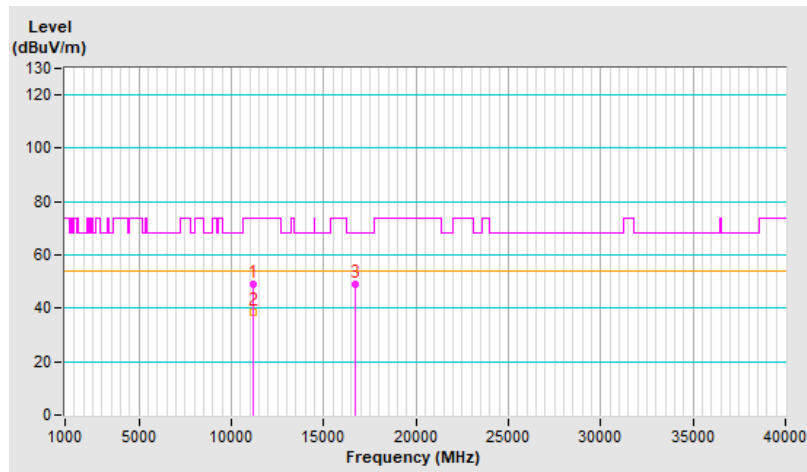




RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	49.8 PK	74.0	-24.2	2.16 V	208	33.2	16.6
2	11160.00	38.8 AV	54.0	-15.2	2.16 V	208	22.2	16.6
3	#16740.00	49.2 PK	68.2	-19.0	1.61 V	48	27.9	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

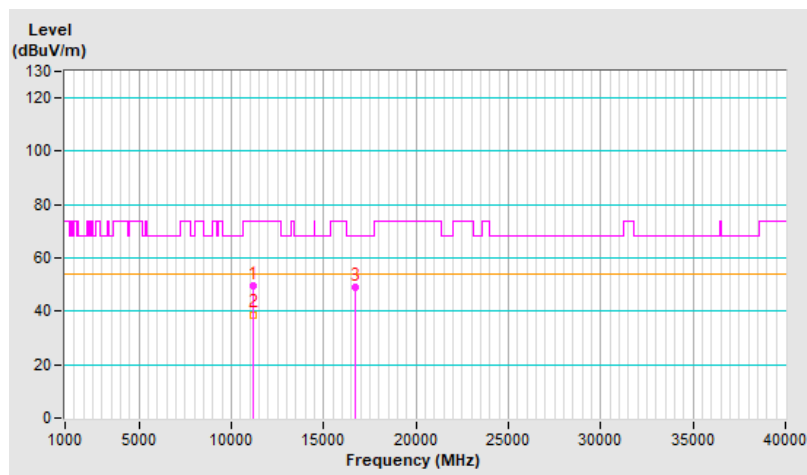




RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.2 PK	74.0	-24.8	3.35 H	64	32.3	16.9
2	11400.00	38.5 AV	54.0	-15.5	3.35 H	64	21.6	16.9
3	#17100.00	48.7 PK	68.2	-19.5	1.41 H	181	28.5	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

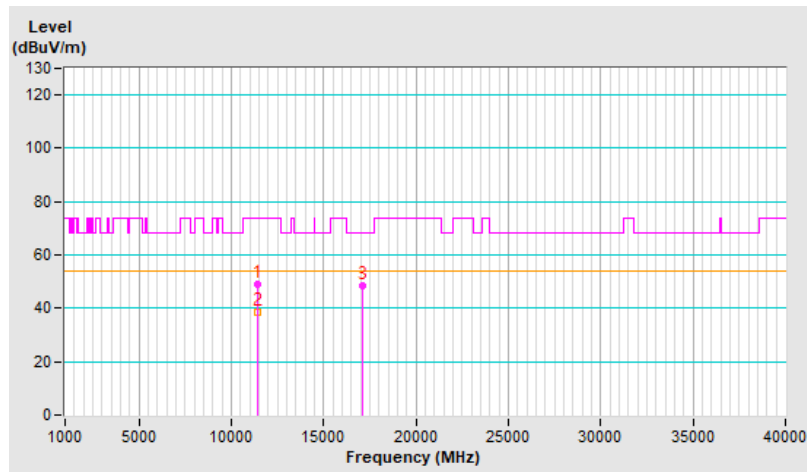


RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.0 PK	74.0	-25.0	2.17 V	190	32.1	16.9
2	11400.00	38.4 AV	54.0	-15.6	2.17 V	190	21.5	16.9
3	#17100.00	48.3 PK	68.2	-19.9	1.61 V	67	28.1	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

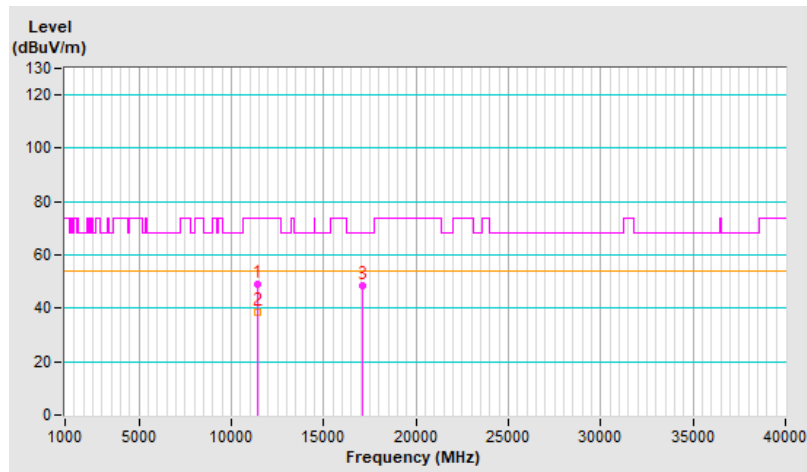


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.2 PK	74.0	-24.8	3.42 H	41	32.3	16.9
2	11440.00	38.5 AV	54.0	-15.5	3.42 H	41	21.6	16.9
3	#17160.00	49.3 PK	68.2	-18.9	1.49 H	188	29.3	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

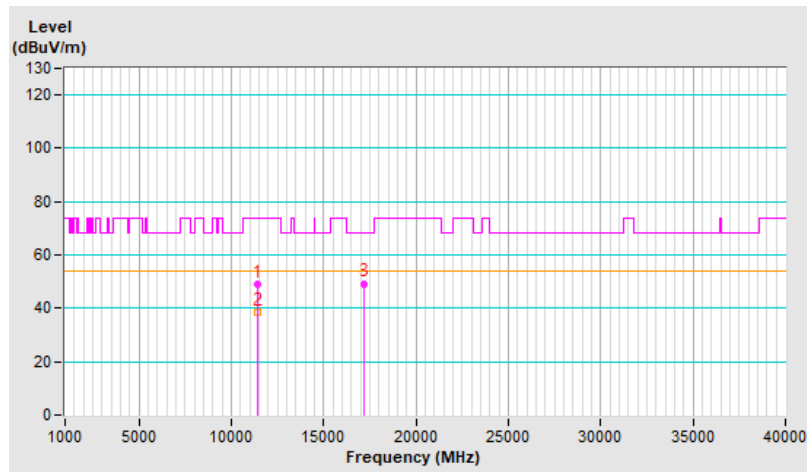


RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.2 PK	74.0	-24.8	2.11 V	212	32.3	16.9
2	11440.00	38.4 AV	54.0	-15.6	2.11 V	212	21.5	16.9
3	#17160.00	48.7 PK	68.2	-19.5	1.66 V	75	28.7	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

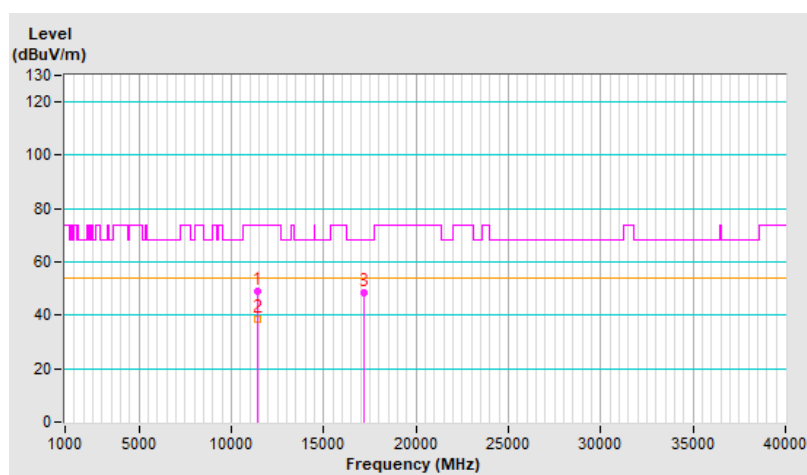


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	49.1 PK	68.2	-19.1	3.38 H	81	33.0	16.1
2	15810.00	49.0 PK	74.0	-25.0	1.45 H	148	31.9	17.1
3	15810.00	37.1 AV	54.0	-16.9	1.45 H	148	20.0	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

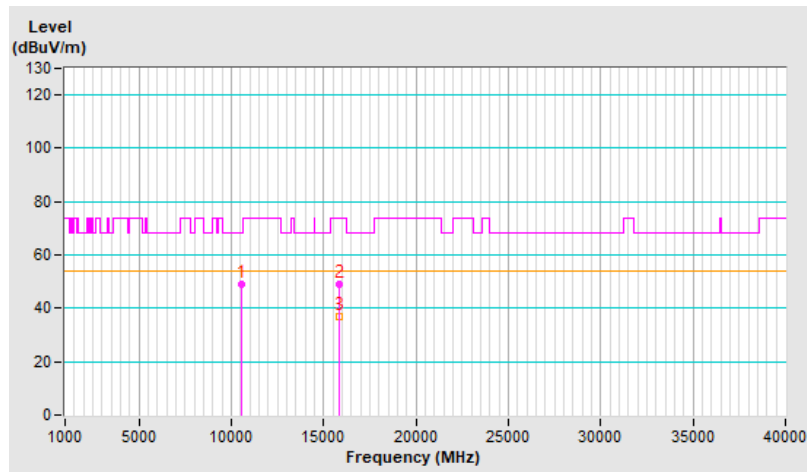


RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10540.00	48.1 PK	68.2	-20.1	2.29 V	183	32.0	16.1
2	15810.00	49.2 PK	74.0	-24.8	1.61 V	79	32.1	17.1
3	15810.00	37.8 AV	54.0	-16.2	1.61 V	79	20.7	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

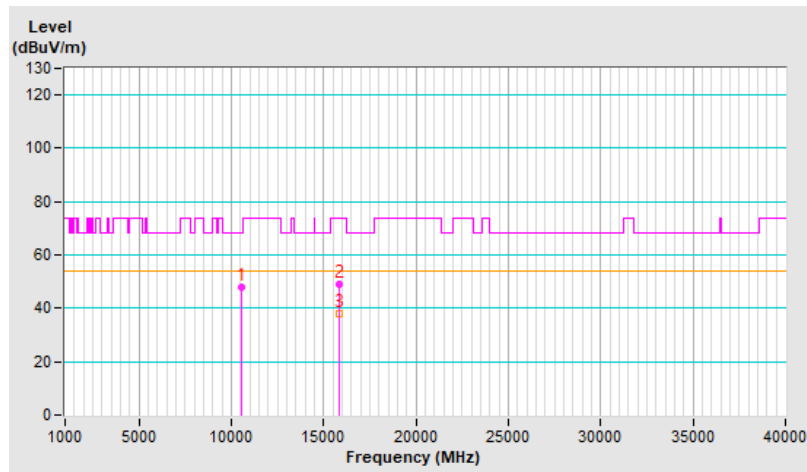


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	48.2 PK	74.0	-25.8	3.32 H	68	31.8	16.4
2	10620.00	37.4 AV	54.0	-16.6	3.32 H	68	21.0	16.4
3	15930.00	49.8 PK	74.0	-24.2	1.48 H	194	32.5	17.3
4	15930.00	38.7 AV	54.0	-15.3	1.48 H	194	21.4	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

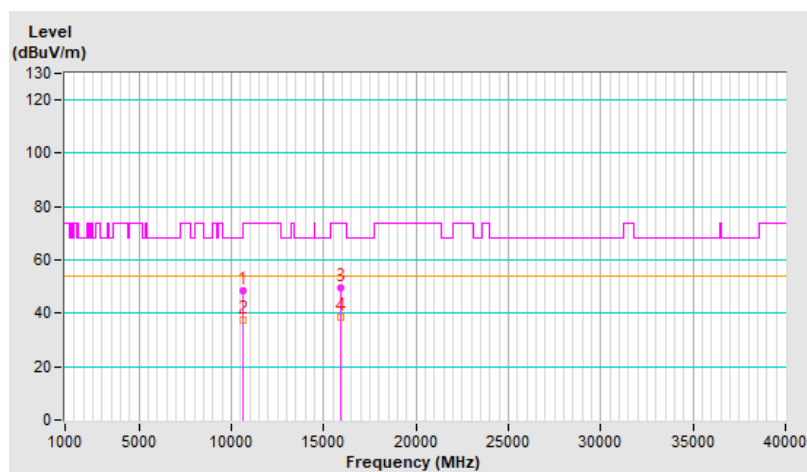


RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	48.7 PK	74.0	-25.3	2.15 V	214	32.3	16.4
2	10620.00	37.5 AV	54.0	-16.5	2.15 V	214	21.1	16.4
3	15930.00	50.3 PK	74.0	-23.7	1.56 V	41	33.0	17.3
4	15930.00	39.3 AV	54.0	-14.7	1.56 V	41	22.0	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

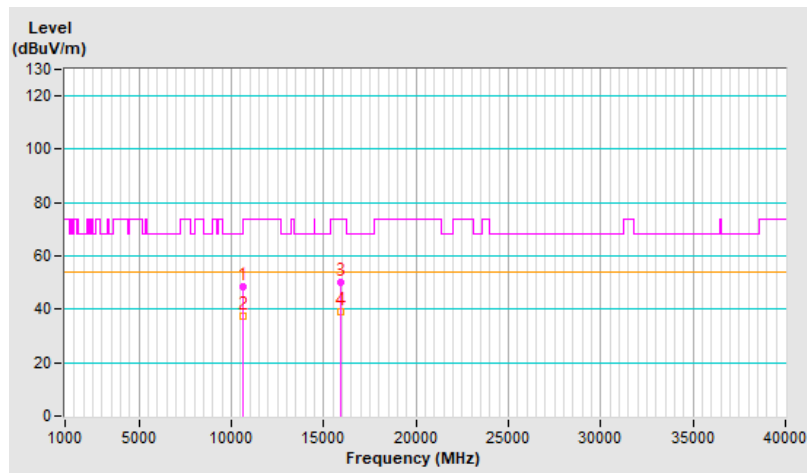


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	48.5 PK	74.0	-25.5	3.33 H	62	31.5	17.0
2	11020.00	37.5 AV	54.0	-16.5	3.33 H	62	20.5	17.0
3	#16530.00	49.9 PK	68.2	-18.3	1.52 H	198	30.0	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

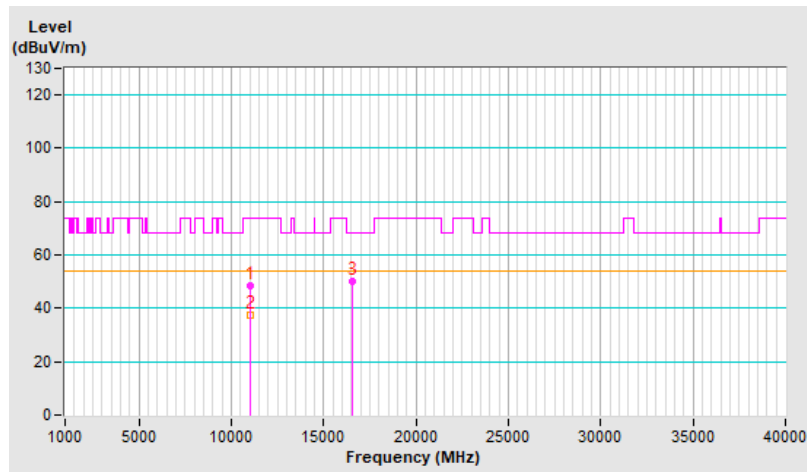


RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	48.6 PK	74.0	-25.4	2.15 V	226	31.6	17.0
2	11020.00	37.6 AV	54.0	-16.4	2.15 V	226	20.6	17.0
3	#16530.00	50.7 PK	68.2	-17.5	1.57 V	39	30.8	19.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

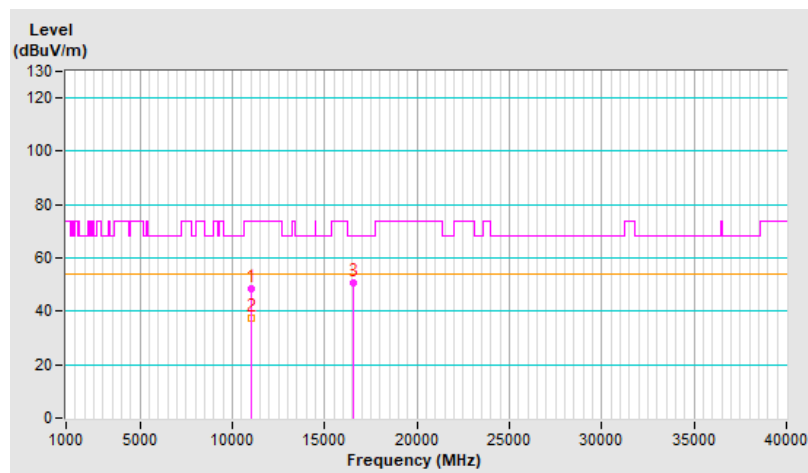


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	48.1 PK	74.0	-25.9	3.37 H	65	31.1	17.0
2	11100.00	37.0 AV	54.0	-17.0	3.37 H	65	20.0	17.0
3	#16650.00	50.3 PK	68.2	-17.9	1.43 H	205	29.3	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

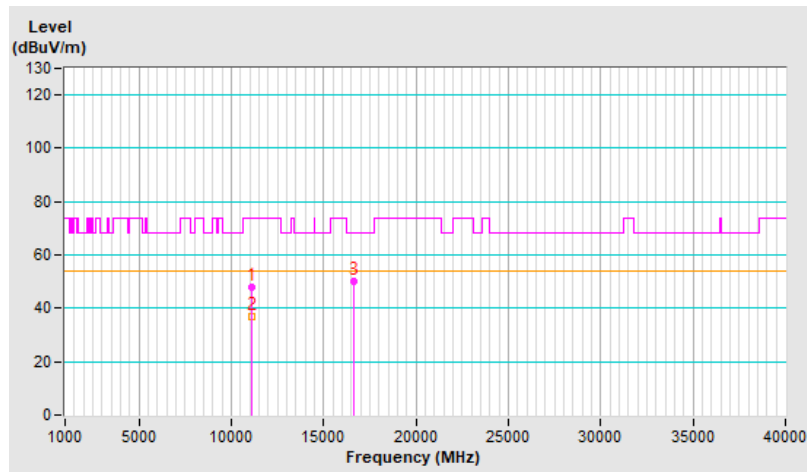


RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11100.00	48.4 PK	74.0	-25.6	2.12 V	226	31.4	17.0
2	11100.00	37.3 AV	54.0	-16.7	2.12 V	226	20.3	17.0
3	#16650.00	50.8 PK	68.2	-17.4	1.52 V	49	29.8	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

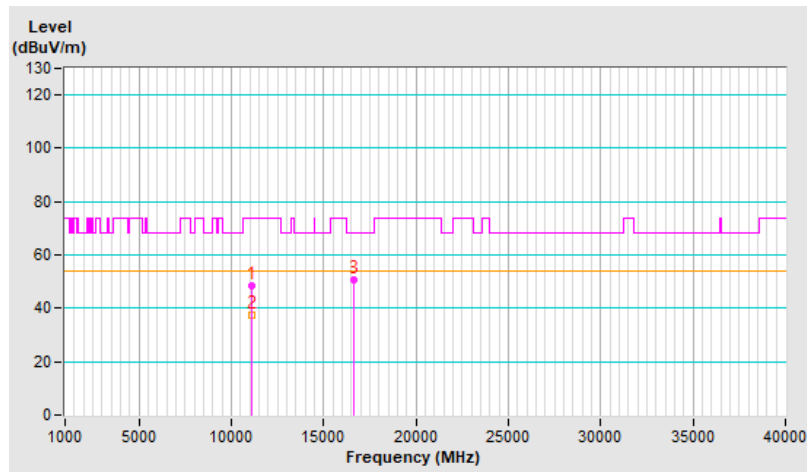


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	49.9 PK	74.0	-24.1	3.36 H	71	32.9	17.0
2	11340.00	39.6 AV	54.0	-14.4	3.36 H	71	22.6	17.0
3	#17010.00	50.6 PK	68.2	-17.6	1.43 H	159	29.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

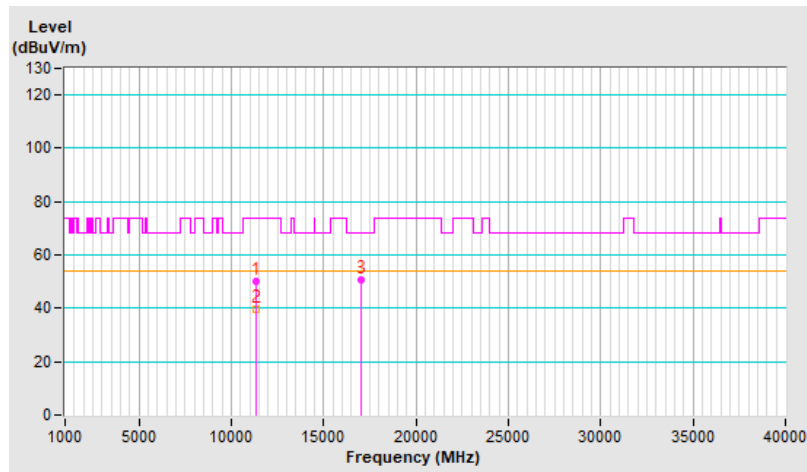


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	50.1 PK	74.0	-23.9	2.13 V	203	33.1	17.0
2	11340.00	40.0 AV	54.0	-14.0	2.13 V	203	23.0	17.0
3	#17010.00	50.3 PK	68.2	-17.9	1.47 V	42	29.5	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

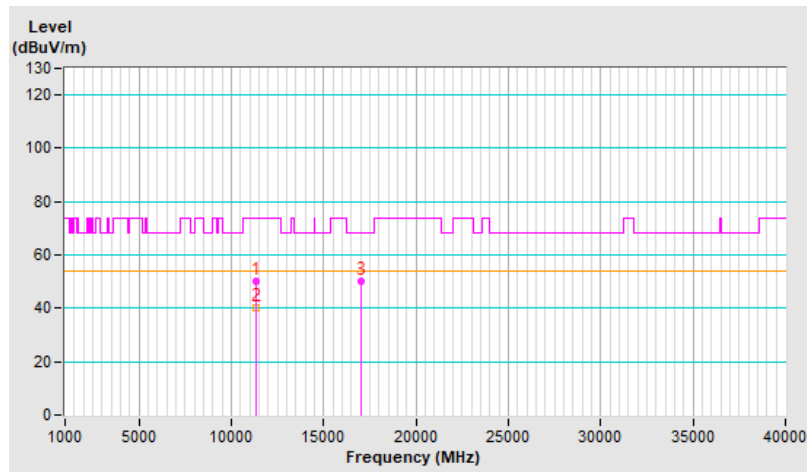


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.0 PK	74.0	-24.0	3.42 H	75	33.1	16.9
2	11420.00	39.8 AV	54.0	-14.2	3.42 H	75	22.9	16.9
3	#17130.00	50.4 PK	68.2	-17.8	1.48 H	174	30.3	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

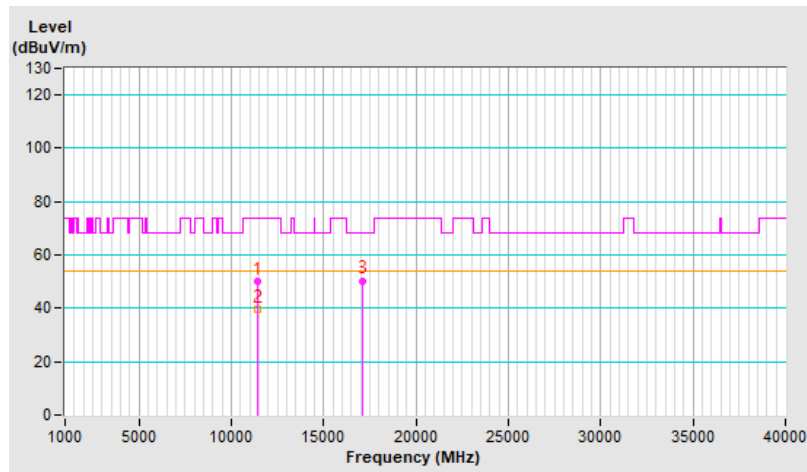


RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	50.1 PK	74.0	-23.9	2.15 V	215	33.2	16.9
2	11420.00	39.8 AV	54.0	-14.2	2.15 V	215	22.9	16.9
3	#17130.00	50.5 PK	68.2	-17.7	1.42 V	36	30.4	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

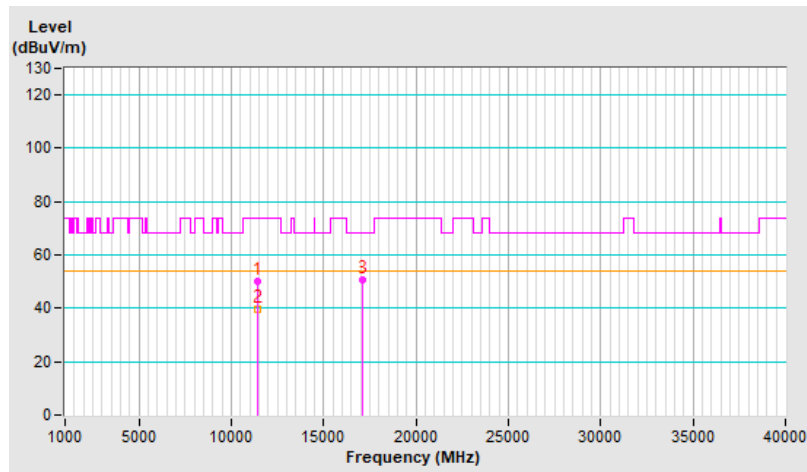


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.4 PK	68.2	-19.8	3.43 H	53	32.1	16.3
2	15870.00	49.6 PK	74.0	-24.4	1.28 H	157	32.3	17.3
3	15870.00	38.0 AV	54.0	-16.0	1.28 H	157	20.7	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

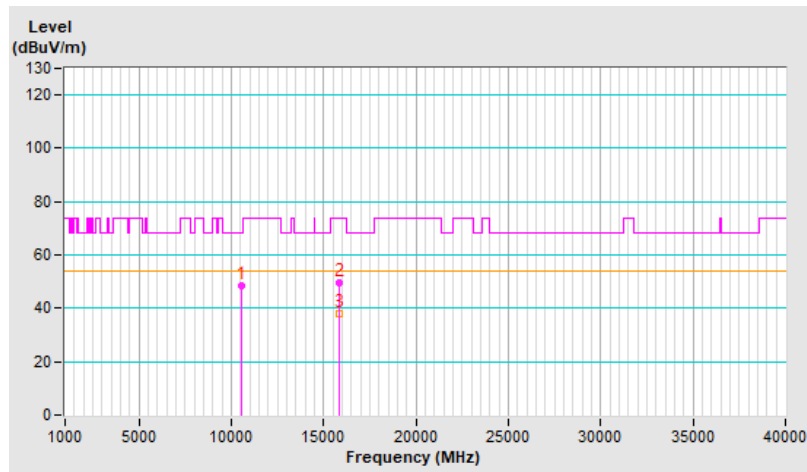


RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	48.9 PK	68.2	-19.3	2.10 V	210	32.6	16.3
2	15870.00	48.8 PK	74.0	-25.2	1.46 V	33	31.5	17.3
3	15870.00	37.6 AV	54.0	-16.4	1.46 V	33	20.3	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

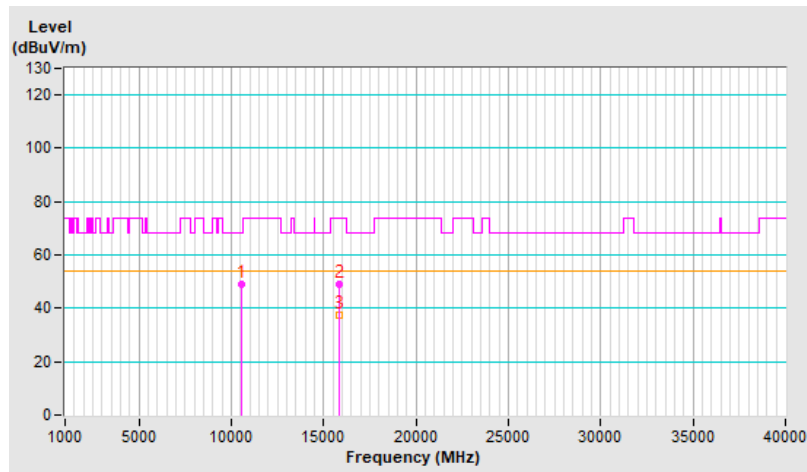


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	47.6 PK	74.0	-26.4	3.51 H	48	30.7	16.9
2	11060.00	36.0 AV	54.0	-18.0	3.51 H	48	19.1	16.9
3	#16590.00	49.6 PK	68.2	-18.6	1.38 H	165	29.2	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

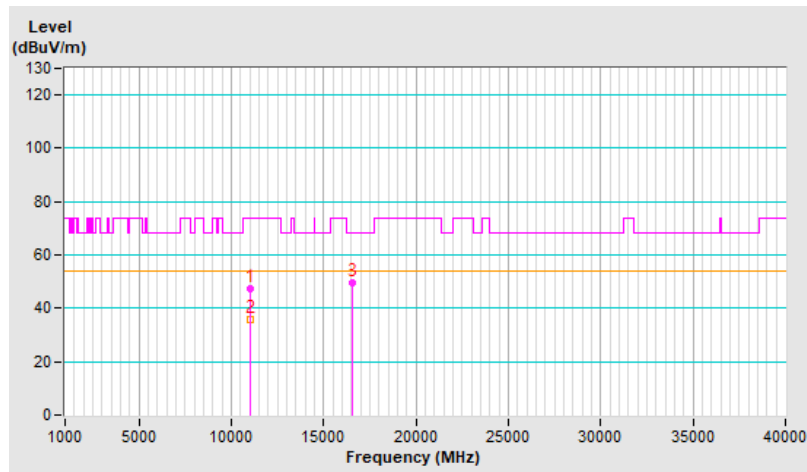


RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	48.5 PK	74.0	-25.5	2.08 V	186	31.6	16.9
2	11060.00	37.4 AV	54.0	-16.6	2.08 V	186	20.5	16.9
3	#16590.00	49.0 PK	68.2	-19.2	1.48 V	44	28.6	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

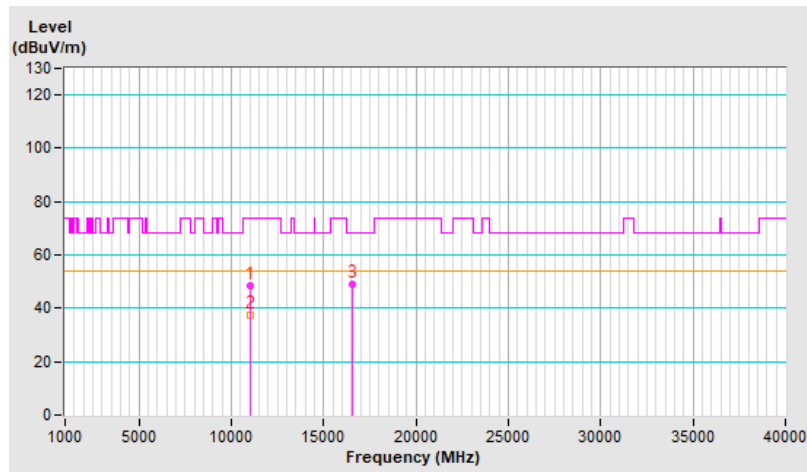


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.2 PK	74.0	-24.8	3.47 H	36	32.5	16.7
2	11220.00	39.0 AV	54.0	-15.0	3.47 H	36	22.3	16.7
3	#16830.00	50.6 PK	68.2	-17.6	1.41 H	149	29.4	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

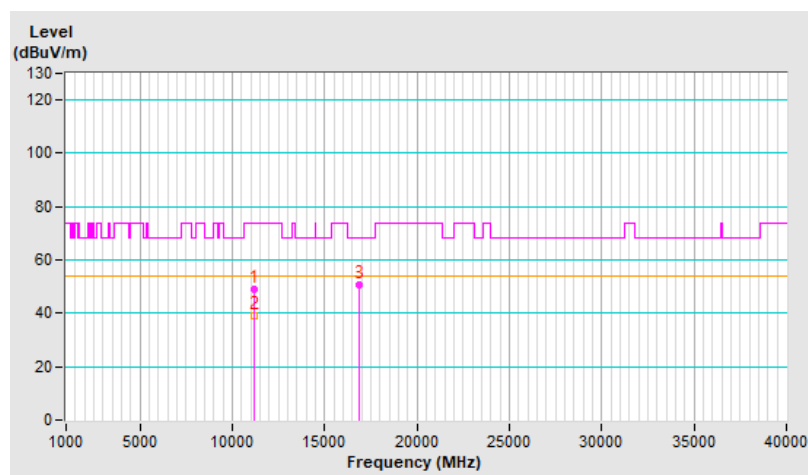


RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	49.5 PK	74.0	-24.5	2.19 V	182	32.8	16.7
2	11220.00	39.2 AV	54.0	-14.8	2.19 V	182	22.5	16.7
3	#16830.00	50.2 PK	68.2	-18.0	1.55 V	40	29.0	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

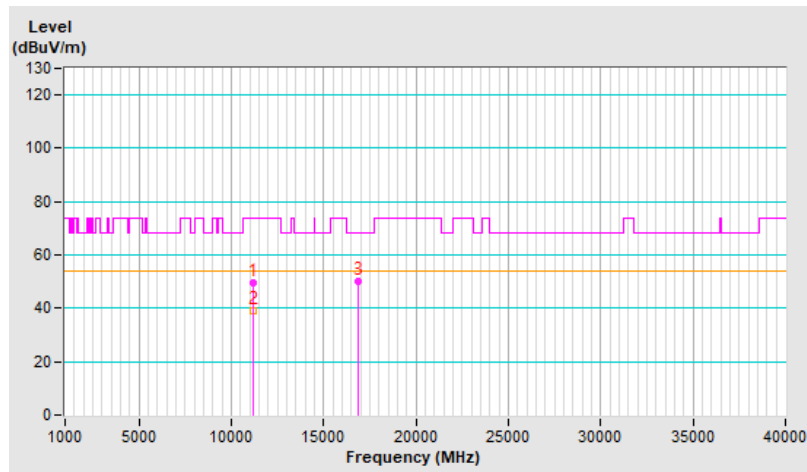


RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	51.3 PK	74.0	-22.7	3.38 H	60	34.3	17.0
2	11380.00	42.4 AV	54.0	-11.6	3.38 H	60	25.4	17.0
3	#17070.00	52.0 PK	68.2	-16.2	1.44 H	182	31.6	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

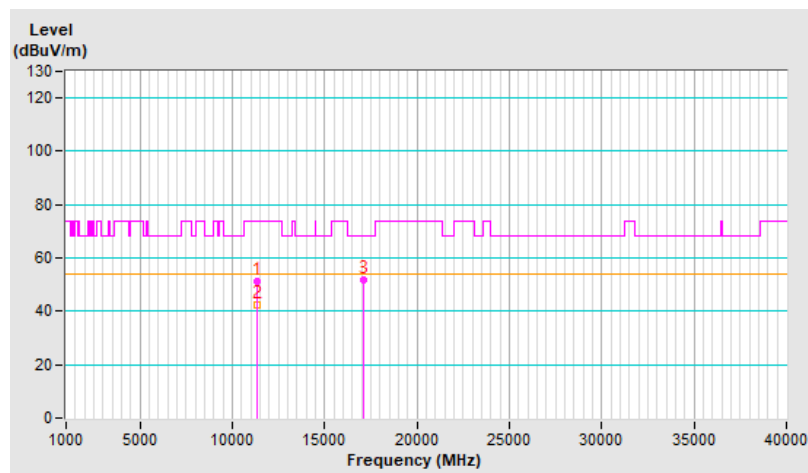




RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	51.5 PK	74.0	-22.5	2.14 V	209	34.5	17.0
2	11380.00	42.6 AV	54.0	-11.4	2.14 V	209	25.6	17.0
3	#17070.00	52.3 PK	68.2	-15.9	1.66 V	18	31.9	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

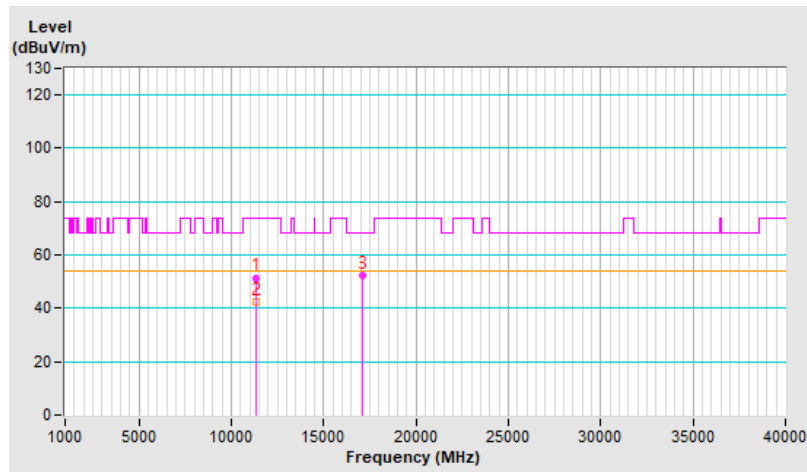


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.4 PK	68.2	-20.8	3.33 H	19	31.5	15.9
2	15750.00	49.1 PK	74.0	-24.9	1.26 H	189	31.9	17.2
3	15750.00	37.0 AV	54.0	-17.0	1.26 H	189	19.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

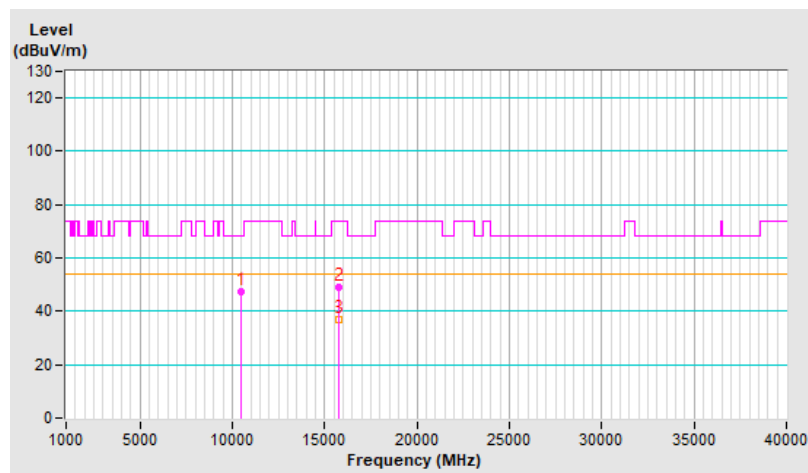


RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	47.2 PK	68.2	-21.0	2.23 V	185	31.3	15.9
2	15750.00	49.3 PK	74.0	-24.7	1.51 V	62	32.1	17.2
3	15750.00	37.4 AV	54.0	-16.6	1.51 V	62	20.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

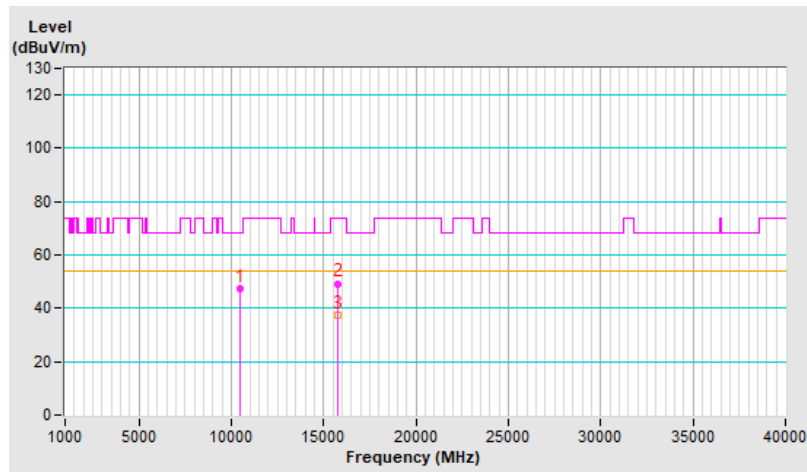


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.8 PK	74.0	-26.2	3.39 H	65	31.1	16.7
2	11140.00	36.9 AV	54.0	-17.1	3.39 H	65	20.2	16.7
3	#16710.00	49.0 PK	68.2	-19.2	1.40 H	171	27.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

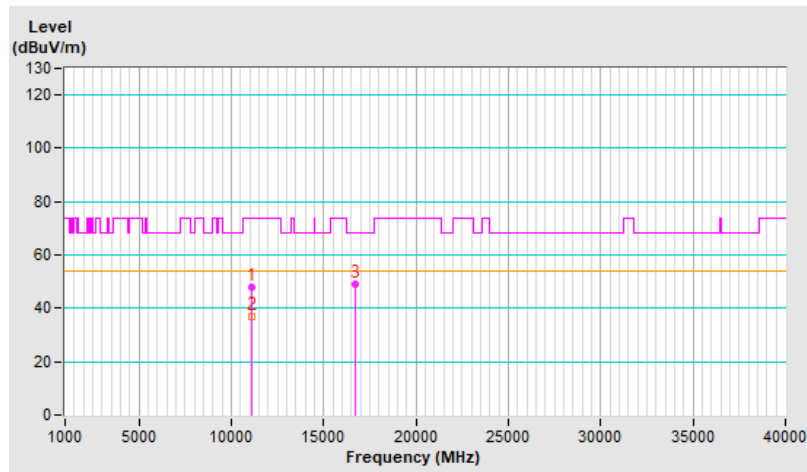


RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 72% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	47.8 PK	74.0	-26.2	2.25 V	183	31.1	16.7
2	11140.00	36.8 AV	54.0	-17.2	2.25 V	183	20.1	16.7
3	#16710.00	49.0 PK	68.2	-19.2	1.49 V	55	27.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

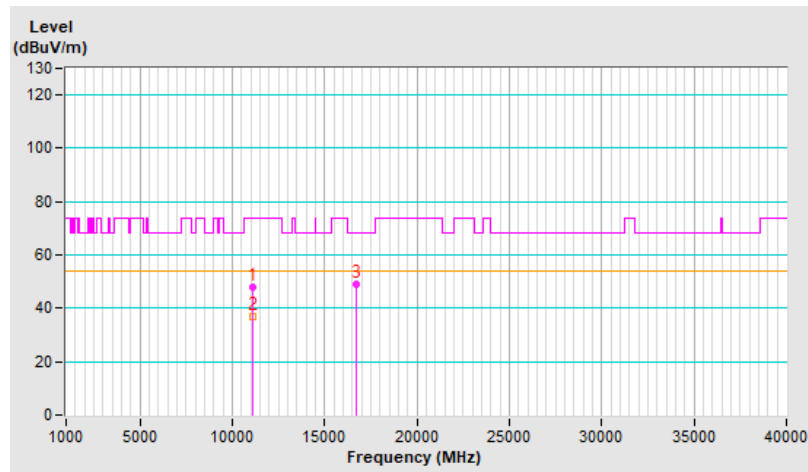


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.8 PK	74.0	-24.2	2.22 H	223	33.4	16.4
2	10640.00	37.5 AV	54.0	-16.5	2.22 H	223	21.1	16.4
3	15960.00	49.0 PK	74.0	-25.0	1.76 H	4	31.8	17.2
4	15960.00	38.2 AV	54.0	-15.8	1.76 H	4	21.0	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

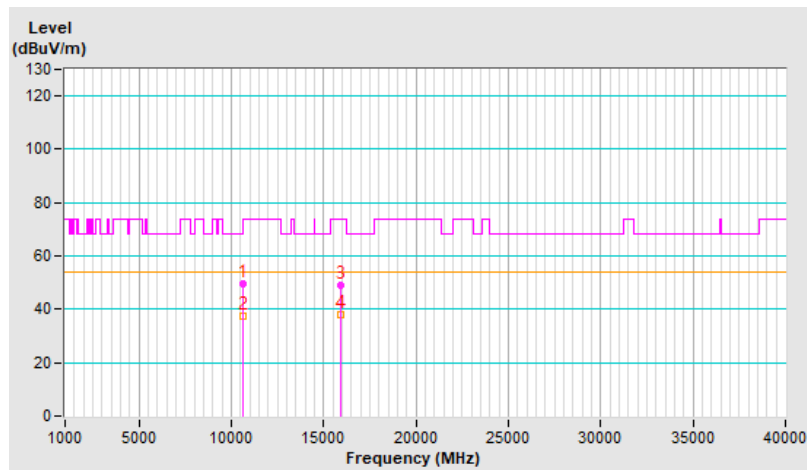


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.9 PK	74.0	-24.1	2.18 V	231	33.5	16.4
2	10640.00	37.1 AV	54.0	-16.9	2.18 V	231	20.7	16.4
3	15960.00	48.9 PK	74.0	-25.1	1.72 V	20	31.7	17.2
4	15960.00	38.1 AV	54.0	-15.9	1.72 V	20	20.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

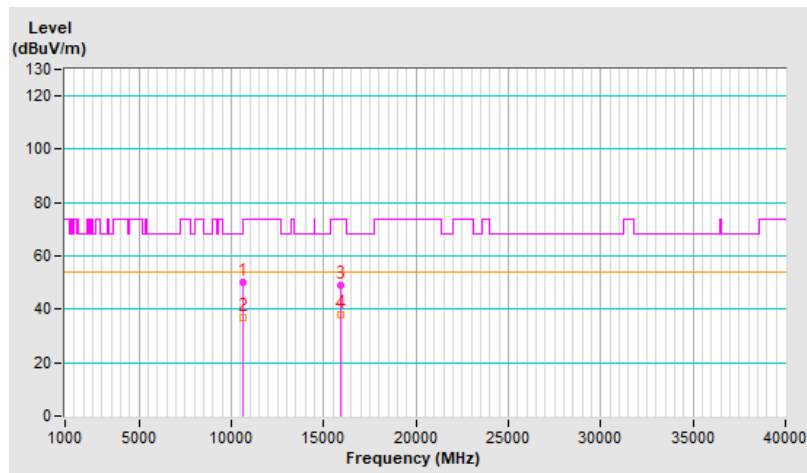


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.0 PK	74.0	-24.0	3.47 H	38	33.1	16.9
2	11000.00	38.4 AV	54.0	-15.6	3.47 H	38	21.5	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.34 H	174	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

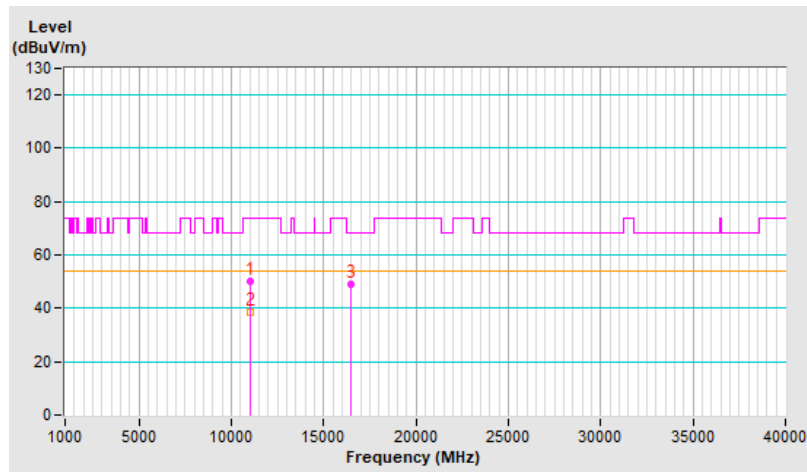




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	3.56 V	51	32.3	16.9
2	11000.00	38.0 AV	54.0	-16.0	3.56 V	51	21.1	16.9
3	#16500.00	49.0 PK	68.2	-19.2	1.43 V	166	29.4	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

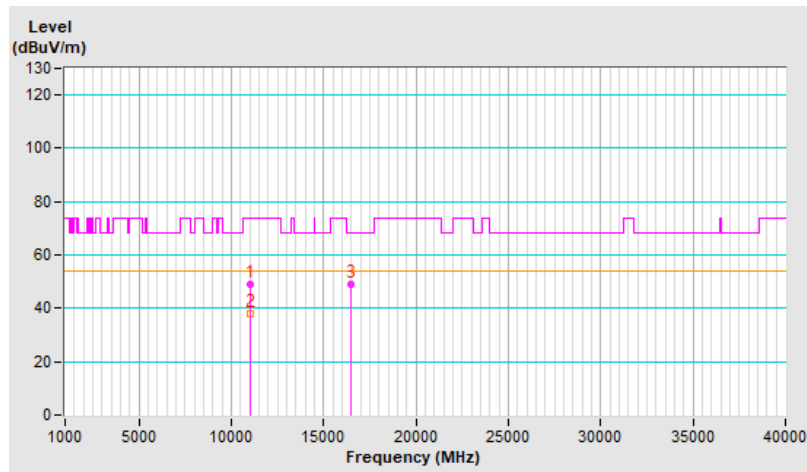


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.5 PK	74.0	-24.5	3.60 H	79	32.6	16.9
2	11400.00	38.2 AV	54.0	-15.8	3.60 H	79	21.3	16.9
3	#17100.00	49.6 PK	68.2	-18.6	1.37 H	189	29.4	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

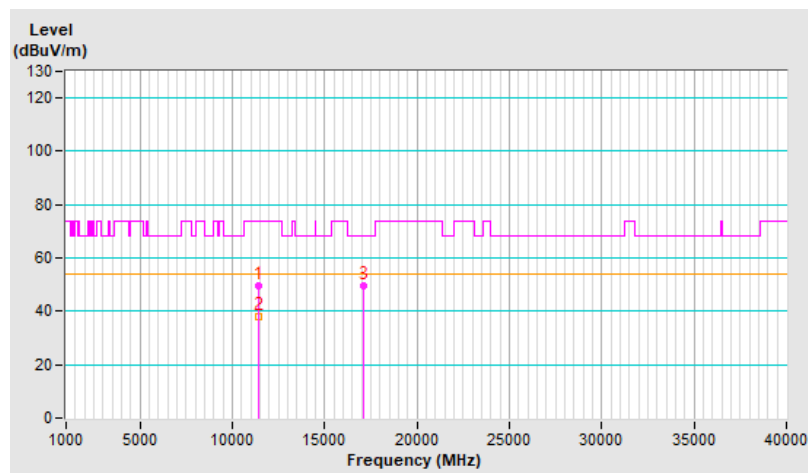


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.7 PK	74.0	-24.3	3.62 V	57	32.8	16.9
2	11400.00	38.3 AV	54.0	-15.7	3.62 V	57	21.4	16.9
3	#17100.00	49.0 PK	68.2	-19.2	1.48 V	162	28.8	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

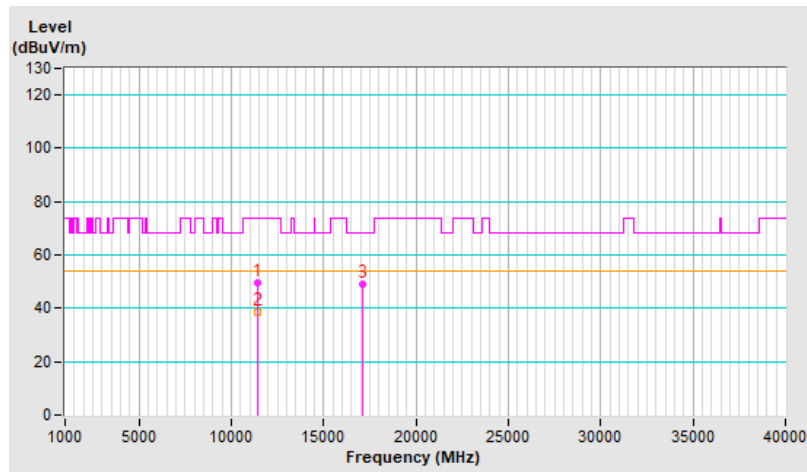


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.2 PK	74.0	-23.8	3.48 H	42	33.3	16.9
2	11440.00	39.1 AV	54.0	-14.9	3.48 H	42	22.2	16.9
3	#17160.00	49.0 PK	68.2	-19.2	1.38 H	181	29.0	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

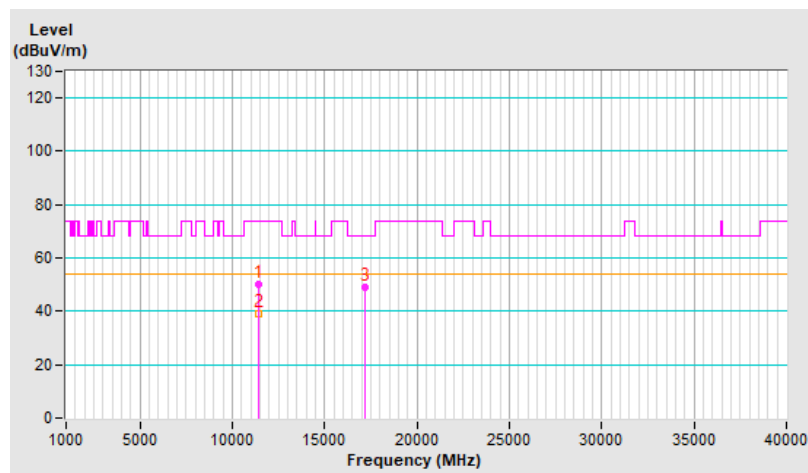


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.2 PK	74.0	-23.8	3.66 V	70	33.3	16.9
2	11440.00	39.1 AV	54.0	-14.9	3.66 V	70	22.2	16.9
3	#17160.00	49.0 PK	68.2	-19.2	1.49 V	167	29.0	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

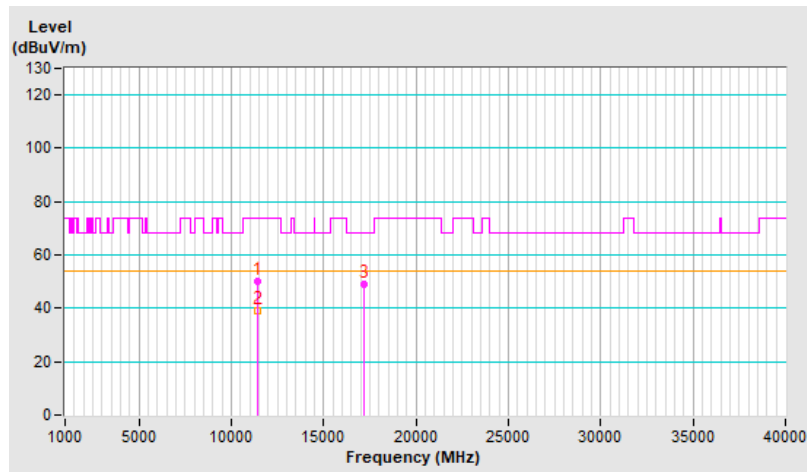


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.2 PK	74.0	-25.8	3.43 H	61	31.8	16.4
2	10640.00	36.3 AV	54.0	-17.7	3.43 H	61	19.9	16.4
3	15960.00	48.1 PK	74.0	-25.9	1.47 H	177	30.9	17.2
4	15960.00	37.5 AV	54.0	-16.5	1.47 H	177	20.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

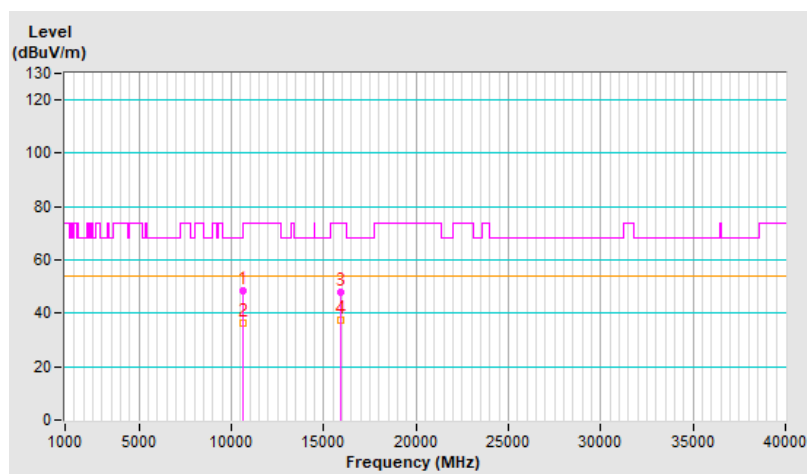


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	48.5 PK	74.0	-25.5	2.08 V	212	32.1	16.4
2	10640.00	36.5 AV	54.0	-17.5	2.08 V	212	20.1	16.4
3	15960.00	49.6 PK	74.0	-24.4	1.58 V	35	32.4	17.2
4	15960.00	37.2 AV	54.0	-16.8	1.58 V	35	20.0	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

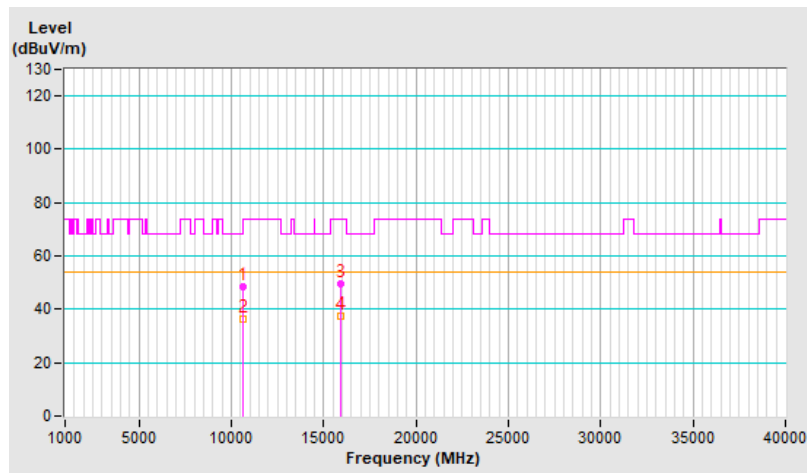


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.2 PK	74.0	-24.8	3.54 H	60	32.3	16.9
2	11000.00	37.8 AV	54.0	-16.2	3.54 H	60	20.9	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.42 H	194	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

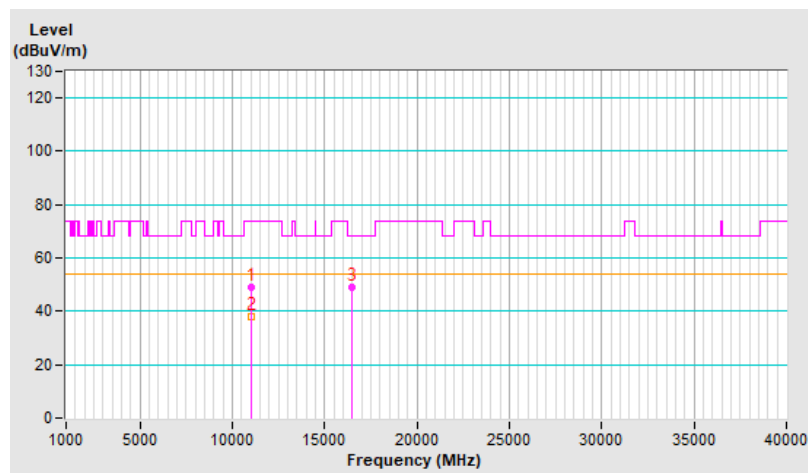




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.1 PK	74.0	-23.9	2.04 V	215	33.2	16.9
2	11000.00	38.5 AV	54.0	-15.5	2.04 V	215	21.6	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.62 V	26	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

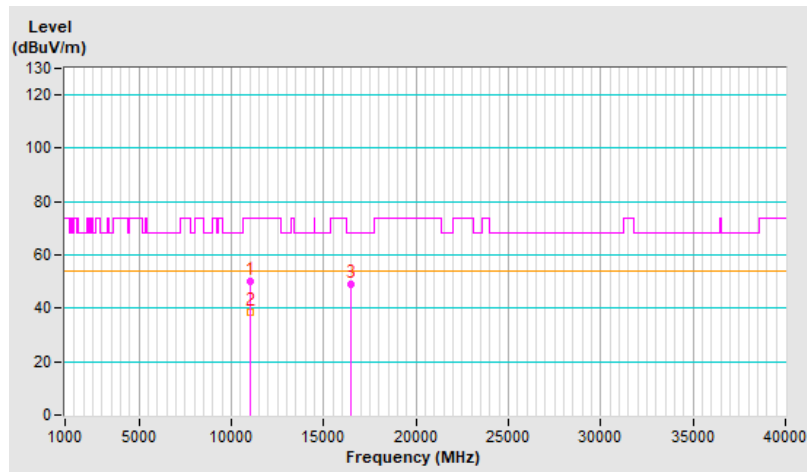


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	38.0 AV	54.0	-16.0	3.55 H	64	21.1	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

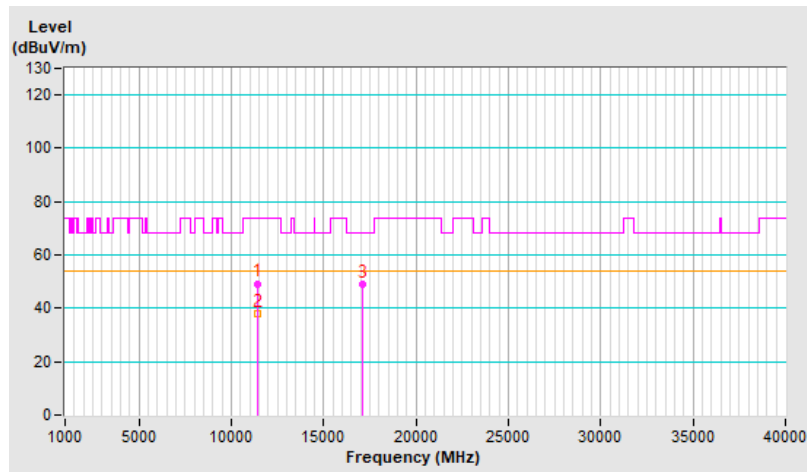




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.1 PK	74.0	-23.9	2.01 V	224	33.2	16.9
2	11400.00	38.5 AV	54.0	-15.5	2.01 V	224	21.6	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.67 V	13	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

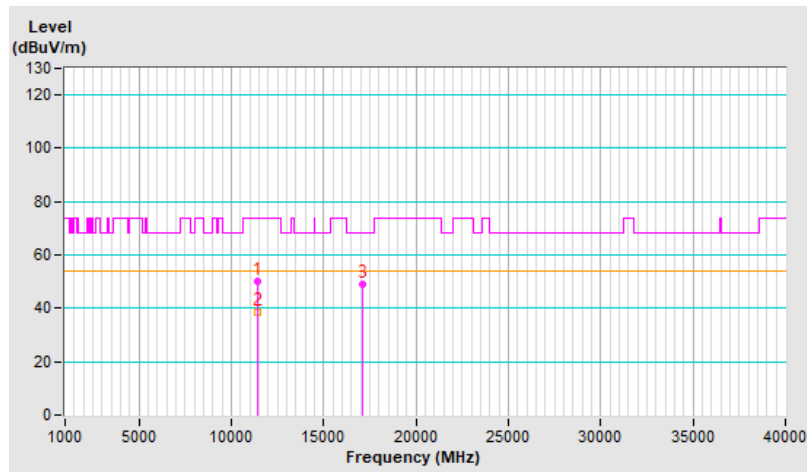


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	49.7 PK	74.0	-24.3	3.51 H	75	32.8	16.9
2	11440.00	38.1 AV	54.0	-15.9	3.51 H	75	21.2	16.9
3	#17160.00	49.4 PK	68.2	-18.8	1.38 H	190	29.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

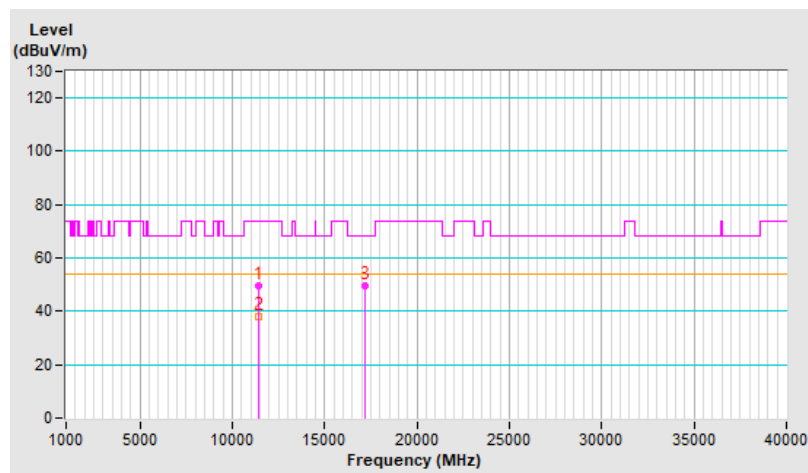




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	2.06 V	229	33.2	16.9
2	11440.00	38.4 AV	54.0	-15.6	2.06 V	229	21.5	16.9
3	#17160.00	48.9 PK	68.2	-19.3	1.64 V	23	28.9	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

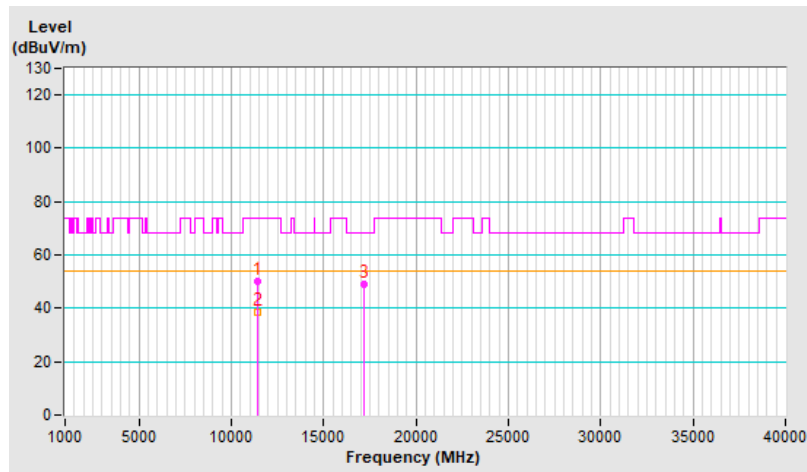


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.6 PK	74.0	-24.4	3.48 H	73	33.2	16.4
2	10640.00	38.5 AV	54.0	-15.5	3.48 H	73	22.1	16.4
3	15960.00	48.4 PK	74.0	-25.6	1.48 H	179	31.2	17.2
4	15960.00	35.7 AV	54.0	-18.3	1.48 H	179	18.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

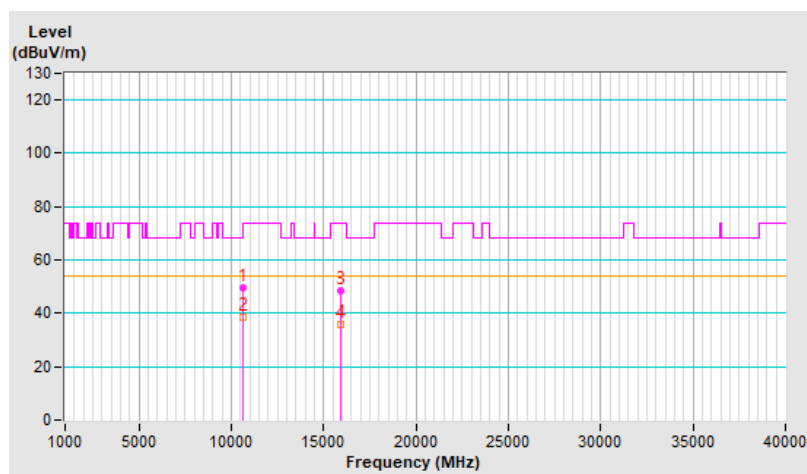


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.5 PK	74.0	-24.5	2.17 V	186	33.1	16.4
2	10640.00	38.1 AV	54.0	-15.9	2.17 V	186	21.7	16.4
3	15960.00	48.6 PK	74.0	-25.4	1.56 V	29	31.4	17.2
4	15960.00	36.0 AV	54.0	-18.0	1.56 V	29	18.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

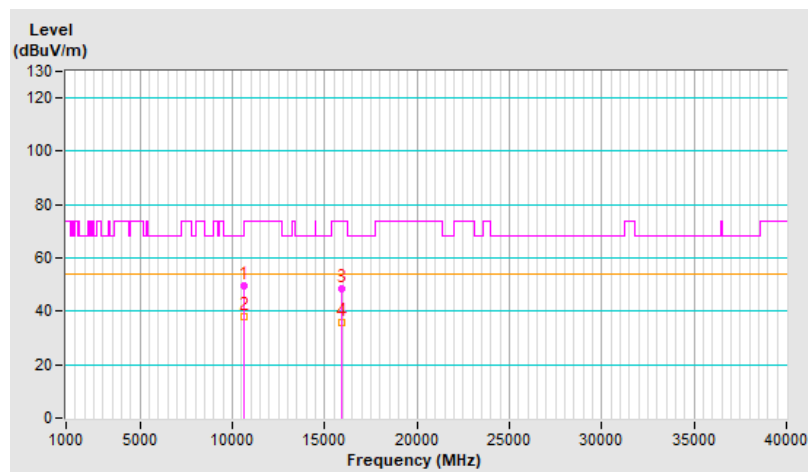


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.6 PK	74.0	-24.4	3.43 H	46	32.7	16.9
2	11000.00	38.8 AV	54.0	-15.2	3.43 H	46	21.9	16.9
3	#16500.00	48.0 PK	68.2	-20.2	1.37 H	186	28.4	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

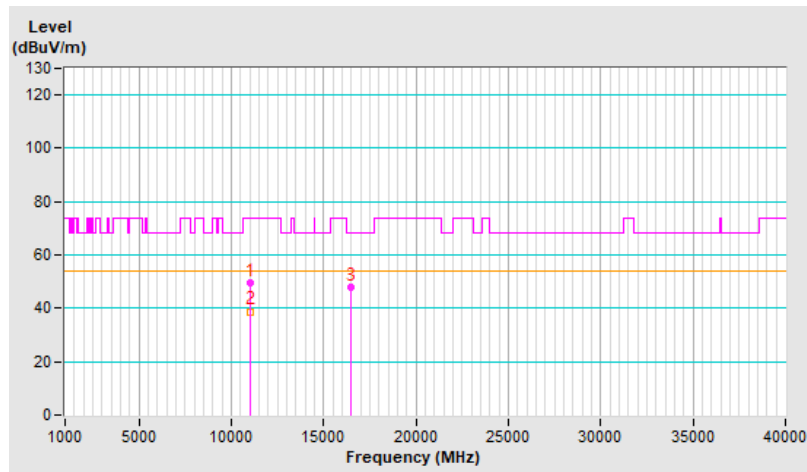




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	2.20 V	175	32.6	16.9
2	11000.00	38.1 AV	54.0	-15.9	2.20 V	175	21.2	16.9
3	#16500.00	48.6 PK	68.2	-19.6	1.56 V	40	29.0	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

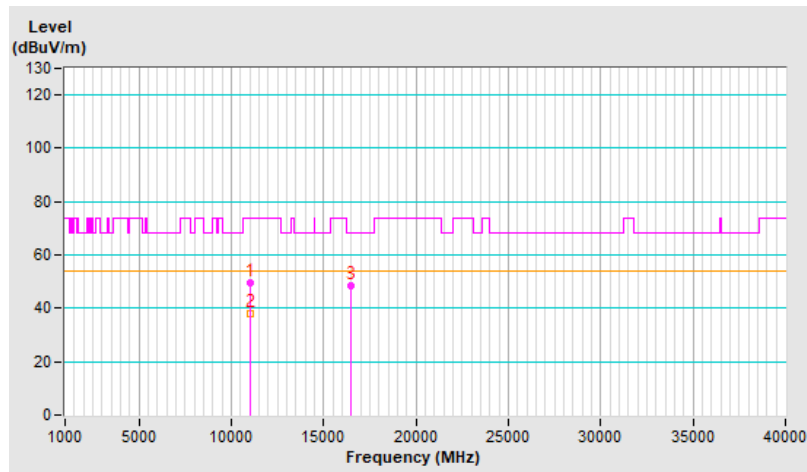


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	50.1 PK	74.0	-23.9	3.46 H	46	33.2	16.9
2	11400.00	39.1 AV	54.0	-14.9	3.46 H	46	22.2	16.9
3	#17100.00	47.9 PK	68.2	-20.3	1.41 H	174	27.7	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

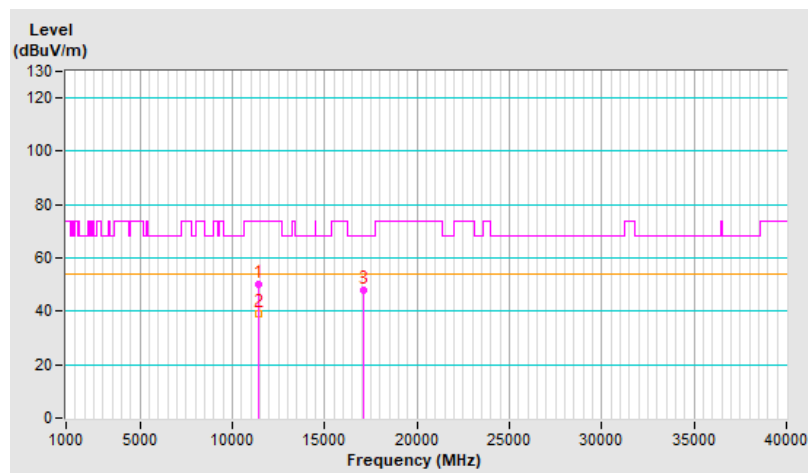




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.0 PK	74.0	-25.0	2.09 V	196	32.1	16.9
2	11400.00	38.4 AV	54.0	-15.6	2.09 V	196	21.5	16.9
3	#17100.00	48.3 PK	68.2	-19.9	1.59 V	38	28.1	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

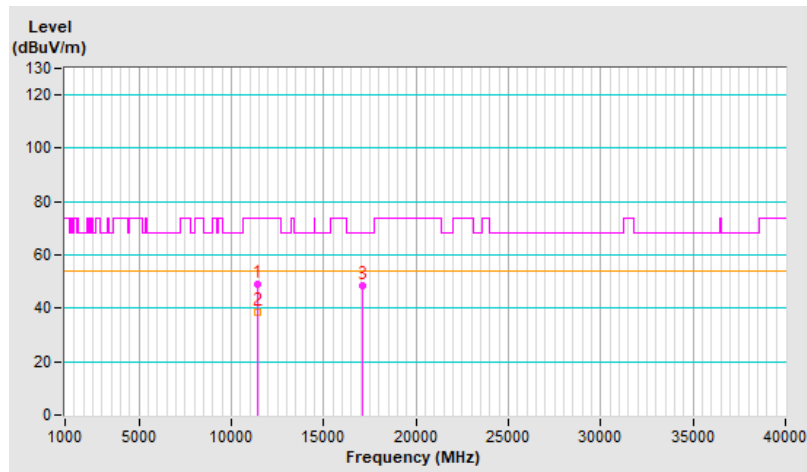


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	3.52 H	68	33.2	16.9
2	11440.00	39.2 AV	54.0	-14.8	3.52 H	68	22.3	16.9
3	#17160.00	49.2 PK	68.2	-19.0	1.42 H	178	29.2	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

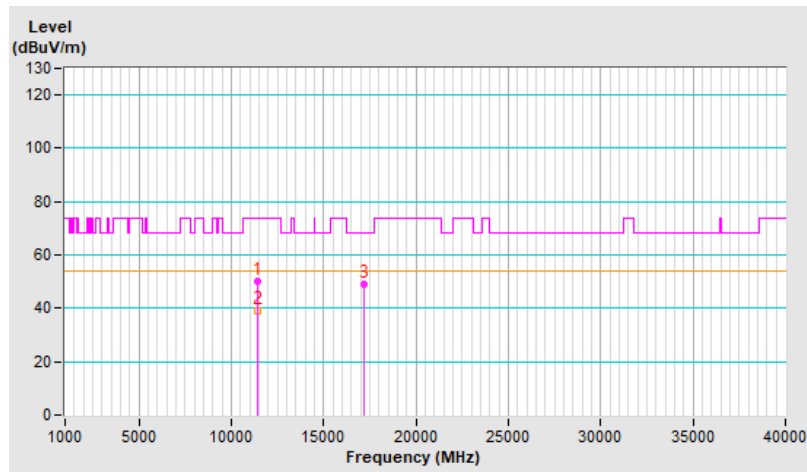


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	50.1 PK	74.0	-23.9	2.17 V	160	33.2	16.9
2	11440.00	39.2 AV	54.0	-14.8	2.17 V	160	22.3	16.9
3	#17160.00	49.2 PK	68.2	-19.0	1.52 V	49	29.2	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

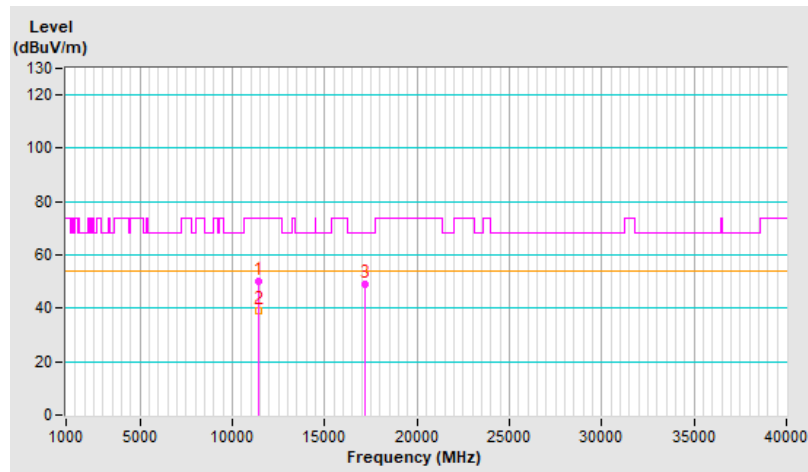


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.4 PK	74.0	-24.6	3.50 H	63	33.0	16.4
2	10640.00	36.1 AV	54.0	-17.9	3.50 H	63	19.7	16.4
3	15960.00	49.0 PK	74.0	-25.0	1.49 H	183	31.8	17.2
4	15960.00	38.2 AV	54.0	-15.8	1.49 H	183	21.0	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

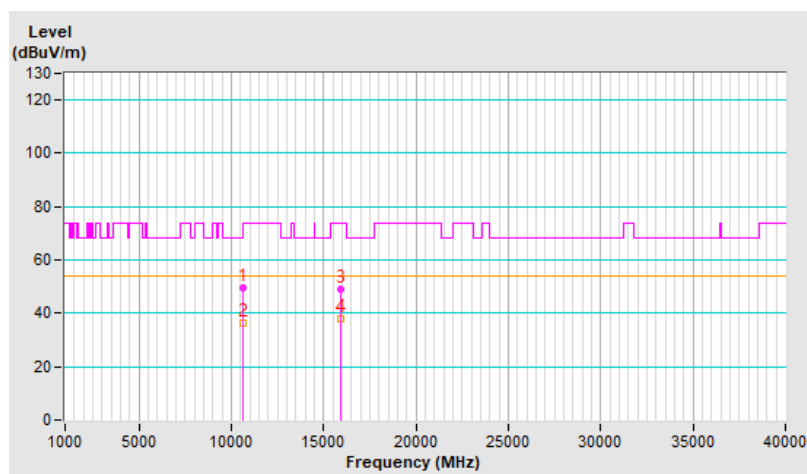


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.2 PK	74.0	-24.8	2.04 V	232	32.8	16.4
2	10640.00	36.5 AV	54.0	-17.5	2.04 V	232	20.1	16.4
3	15960.00	48.8 PK	74.0	-25.2	1.61 V	23	31.6	17.2
4	15960.00	38.0 AV	54.0	-16.0	1.61 V	23	20.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

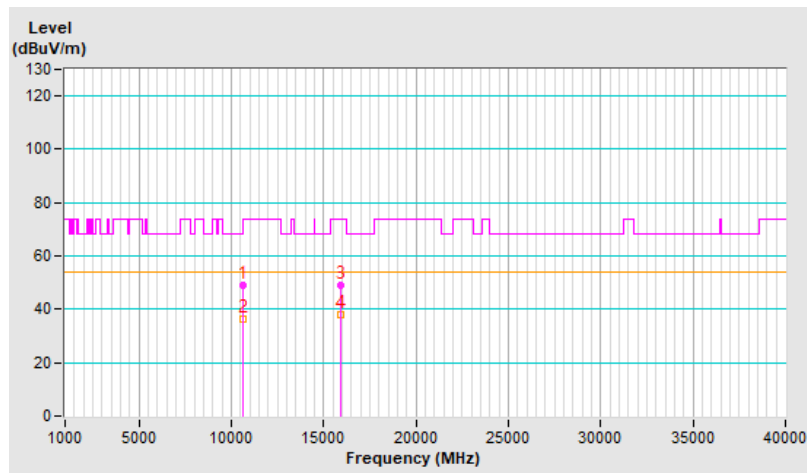


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	3.50 H	33	32.6	16.9
2	11000.00	38.5 AV	54.0	-15.5	3.50 H	33	21.6	16.9
3	#16500.00	49.1 PK	68.2	-19.1	1.46 H	178	29.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

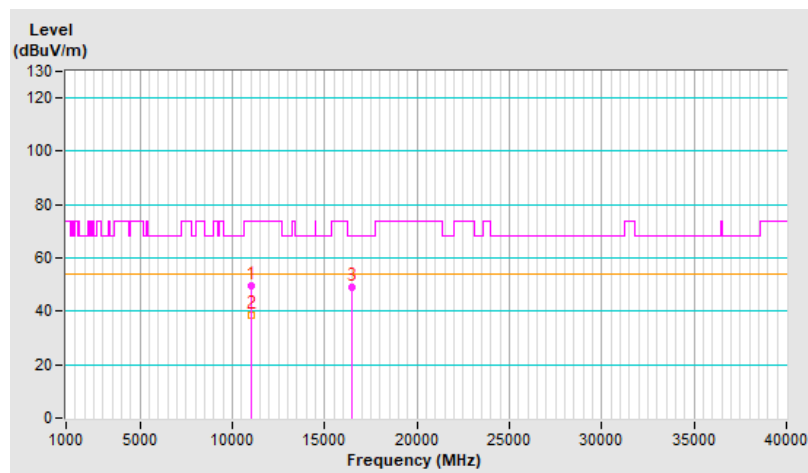


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.5 PK	74.0	-24.5	2.04 V	215	32.6	16.9
2	11000.00	38.1 AV	54.0	-15.9	2.04 V	215	21.2	16.9
3	#16500.00	48.6 PK	68.2	-19.6	1.62 V	26	29.0	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

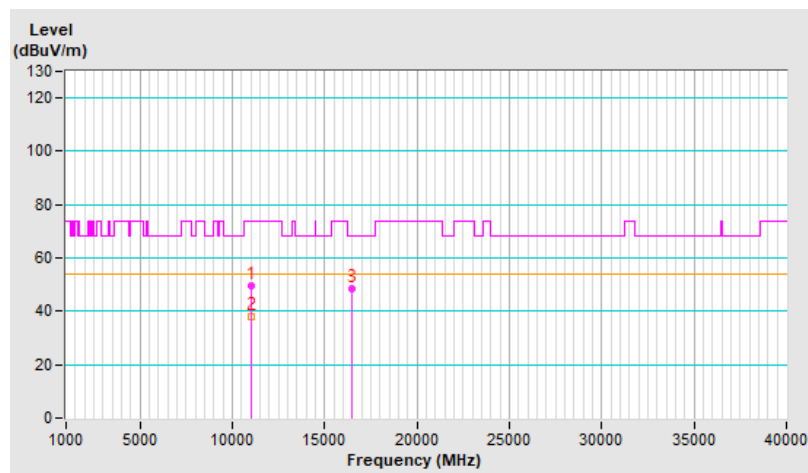


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.7 PK	74.0	-24.3	3.55 H	64	32.8	16.9
2	11400.00	38.4 AV	54.0	-15.6	3.55 H	64	21.5	16.9
3	#17100.00	48.5 PK	68.2	-19.7	1.38 H	185	28.3	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

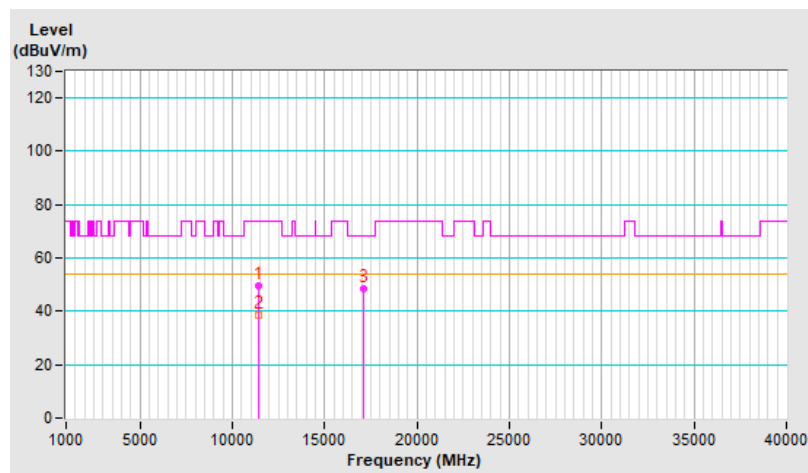




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	2.09 V	196	32.4	16.9
2	11400.00	38.3 AV	54.0	-15.7	2.09 V	196	21.4	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.59 V	38	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

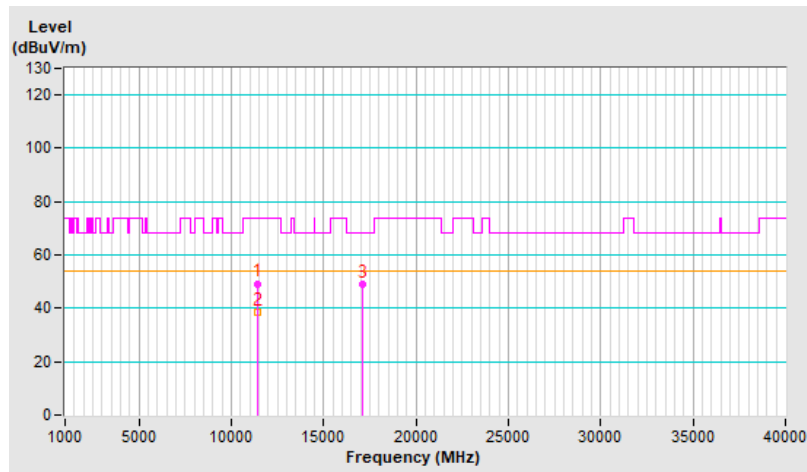


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.4 PK	74.0	-22.6	3.50 H	49	34.5	16.9
2	11440.00	39.3 AV	54.0	-14.7	3.50 H	49	22.4	16.9
3	#17160.00	49.1 PK	68.2	-19.1	1.44 H	175	29.1	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

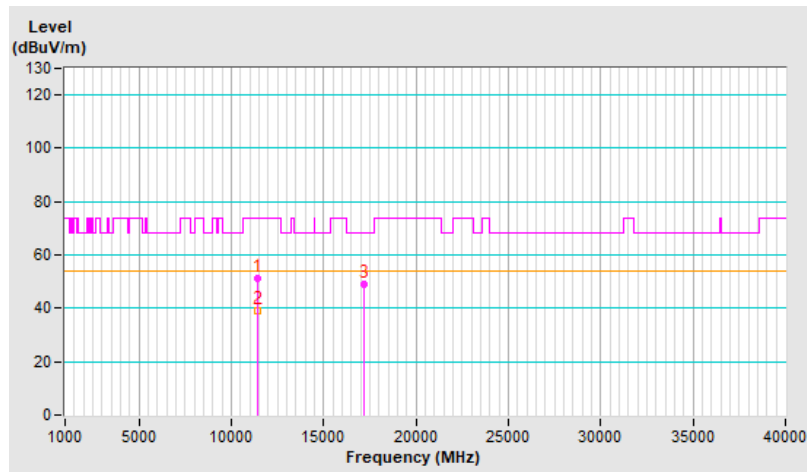




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.2 PK	74.0	-22.8	2.10 V	205	34.3	16.9
2	11440.00	39.1 AV	54.0	-14.9	2.10 V	205	22.2	16.9
3	#17160.00	49.2 PK	68.2	-19.0	1.61 V	40	29.2	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

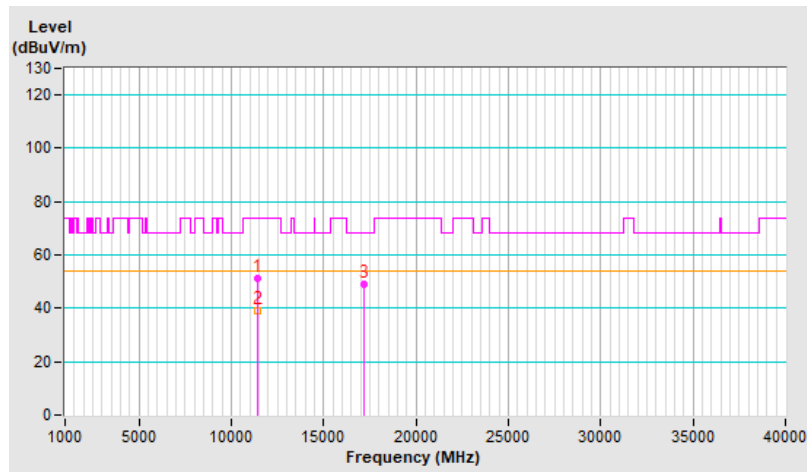


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.8 PK	74.0	-24.2	3.50 H	63	33.4	16.4
2	10640.00	37.1 AV	54.0	-16.9	3.50 H	63	20.7	16.4
3	15960.00	48.7 PK	74.0	-25.3	1.49 H	183	31.5	17.2
4	15960.00	38.4 AV	54.0	-15.6	1.49 H	183	21.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

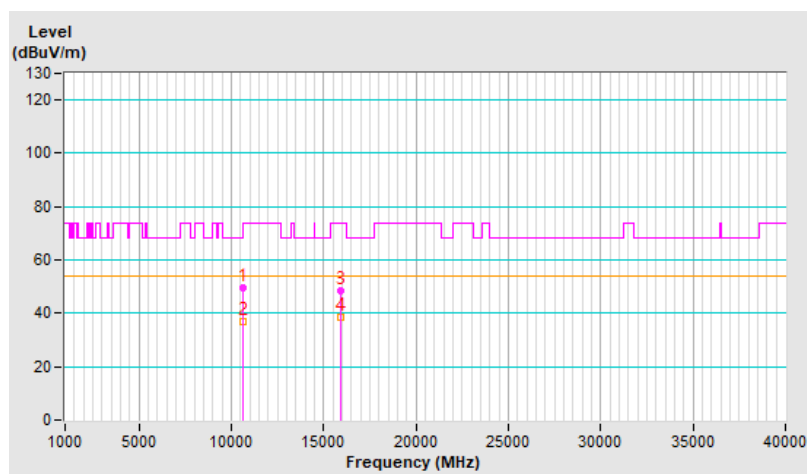


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	49.1 PK	74.0	-24.9	2.11 V	207	32.7	16.4
2	10640.00	37.6 AV	54.0	-16.4	2.11 V	207	21.2	16.4
3	15960.00	48.3 PK	74.0	-25.7	1.65 V	31	31.1	17.2
4	15960.00	38.5 AV	54.0	-15.5	1.65 V	31	21.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

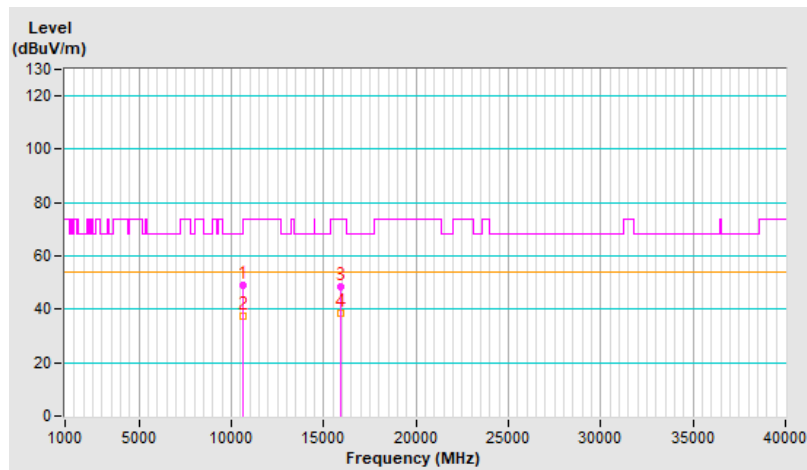




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	49.9 PK	74.0	-24.1	3.50 H	33	33.0	16.9
2	11000.00	38.6 AV	54.0	-15.4	3.50 H	33	21.7	16.9
3	#16500.00	48.6 PK	68.2	-19.6	1.46 H	178	29.0	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

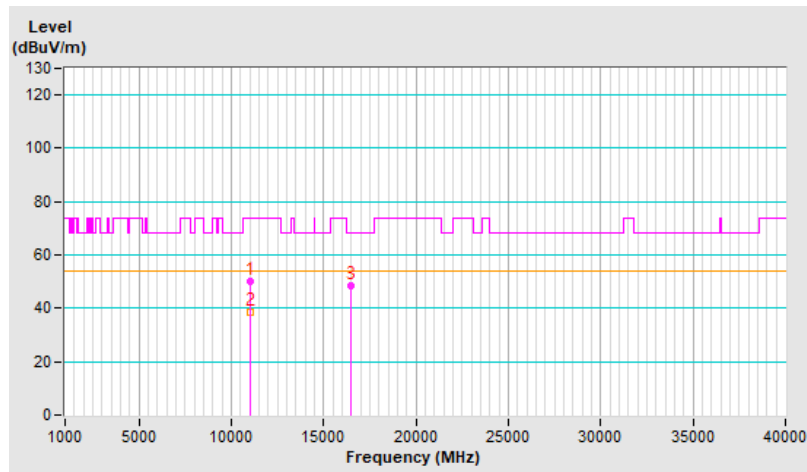


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	50.0 PK	74.0	-24.0	2.04 V	215	33.1	16.9
2	11000.00	38.4 AV	54.0	-15.6	2.04 V	215	21.5	16.9
3	#16500.00	48.4 PK	68.2	-19.8	1.62 V	26	28.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

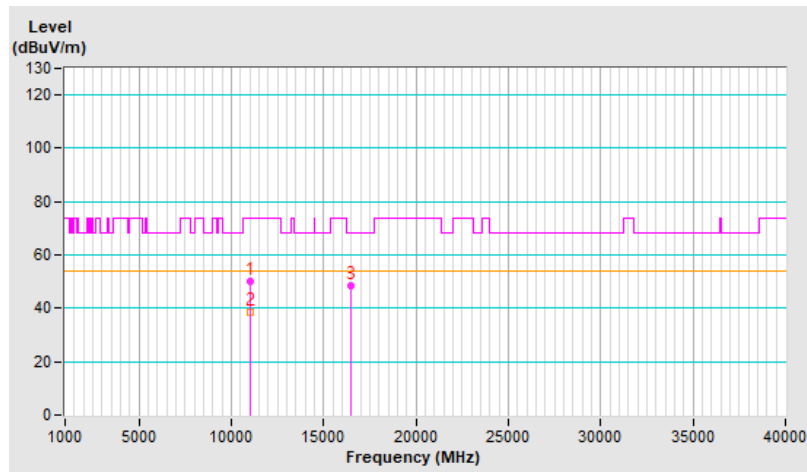


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.3 PK	74.0	-24.7	3.55 H	64	32.4	16.9
2	11400.00	38.0 AV	54.0	-16.0	3.55 H	64	21.1	16.9
3	#17100.00	49.1 PK	68.2	-19.1	1.38 H	185	28.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

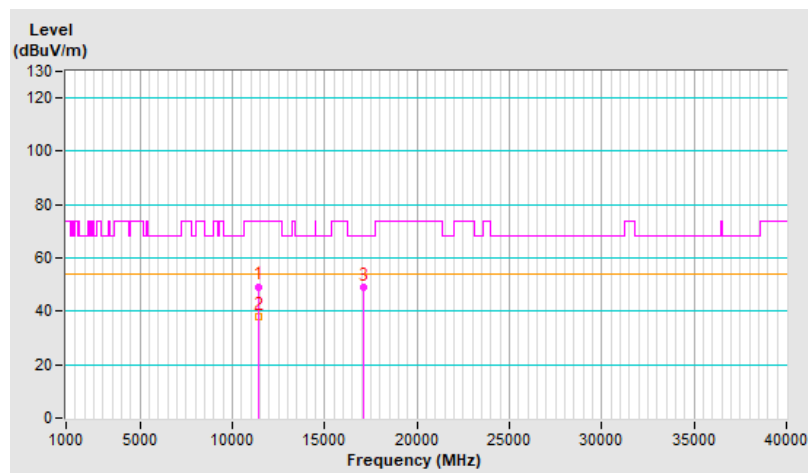


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	49.2 PK	74.0	-24.8	2.09 V	196	32.3	16.9
2	11400.00	38.1 AV	54.0	-15.9	2.09 V	196	21.2	16.9
3	#17100.00	48.0 PK	68.2	-20.2	1.59 V	38	27.8	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

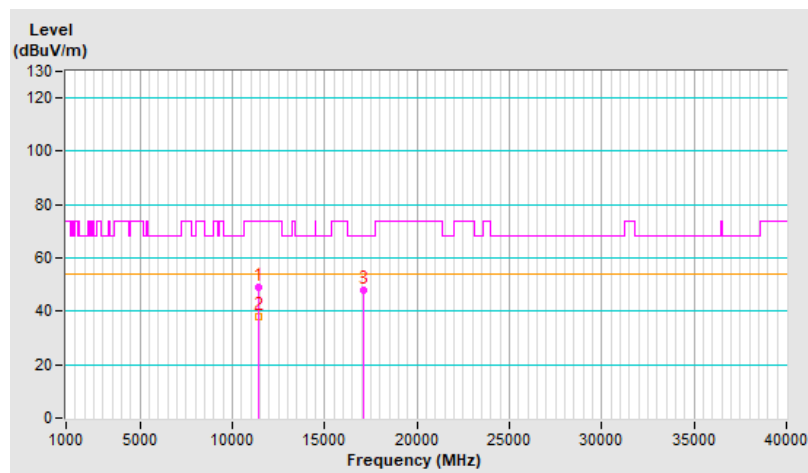


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.1 PK	74.0	-22.9	3.50 H	49	34.2	16.9
2	11440.00	39.3 AV	54.0	-14.7	3.50 H	49	22.4	16.9
3	#17160.00	48.8 PK	68.2	-19.4	1.44 H	175	28.8	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

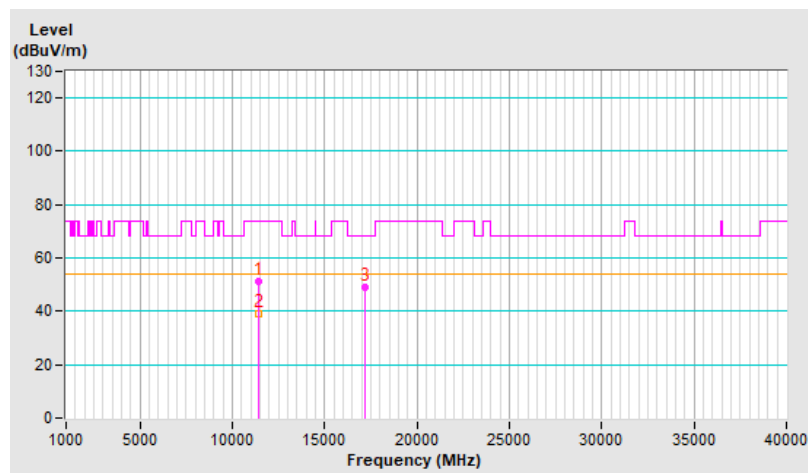




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	51.7 PK	74.0	-22.3	2.10 V	205	34.8	16.9
2	11440.00	39.5 AV	54.0	-14.5	2.10 V	205	22.6	16.9
3	#17160.00	49.4 PK	68.2	-18.8	1.61 V	40	29.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

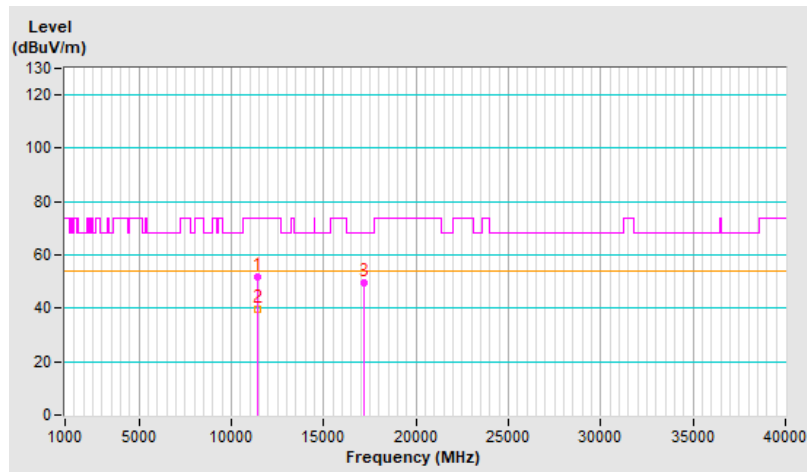


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.3 PK	68.2	-18.9	3.52 H	79	33.0	16.3
2	15870.00	48.0 PK	74.0	-26.0	1.54 H	180	30.7	17.3
3	15870.00	35.7 AV	54.0	-18.3	1.54 H	180	18.4	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

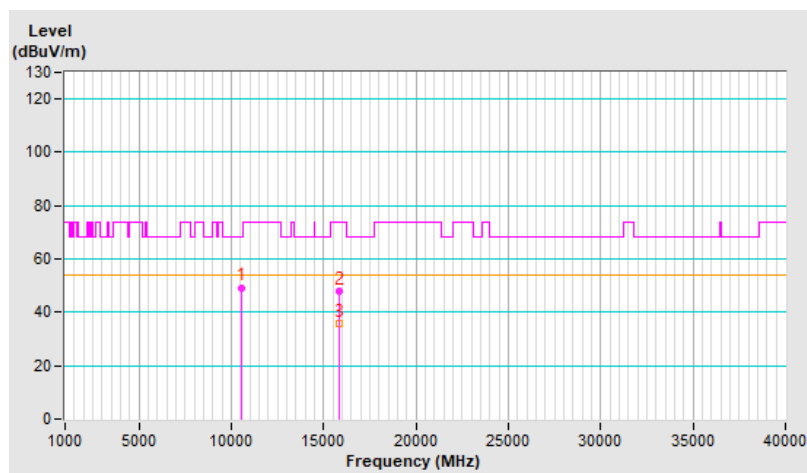




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	49.3 PK	68.2	-18.9	2.11 V	203	33.0	16.3
2	15870.00	48.3 PK	74.0	-25.7	1.66 V	32	31.0	17.3
3	15870.00	35.9 AV	54.0	-18.1	1.66 V	32	18.6	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

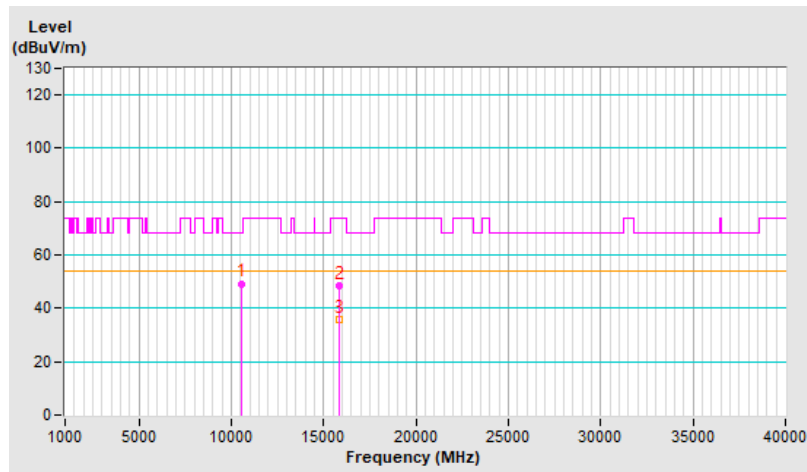


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.1 PK	74.0	-24.9	3.57 H	71	32.2	16.9
2	11060.00	38.3 AV	54.0	-15.7	3.57 H	71	21.4	16.9
3	#16590.00	48.0 PK	68.2	-20.2	1.57 H	179	27.6	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

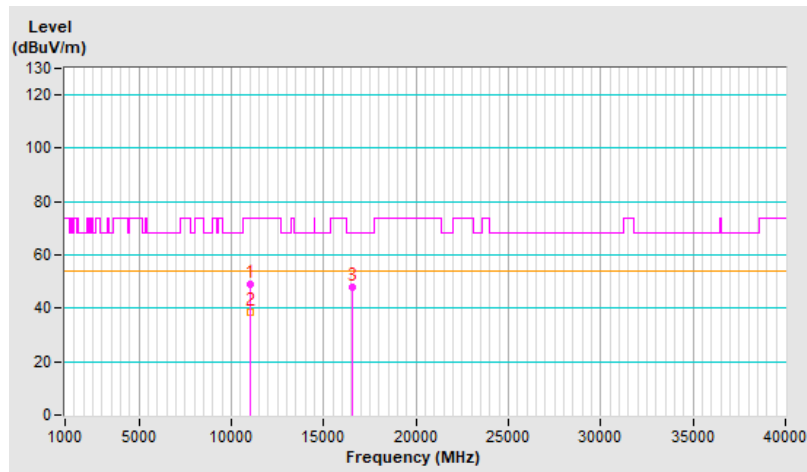


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	49.6 PK	74.0	-24.4	2.13 V	195	32.7	16.9
2	11060.00	38.7 AV	54.0	-15.3	2.13 V	195	21.8	16.9
3	#16590.00	47.3 PK	68.2	-20.9	1.63 V	41	26.9	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

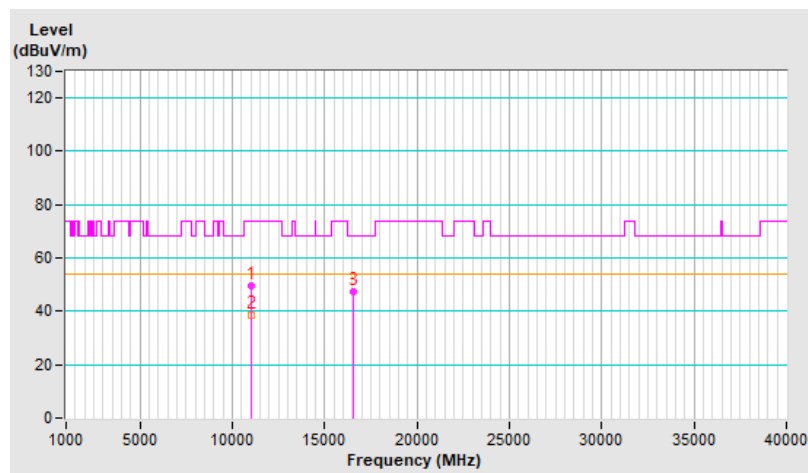


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	52.1 PK	74.0	-21.9	3.50 H	54	35.1	17.0
2	11380.00	39.9 AV	54.0	-14.1	3.50 H	54	22.9	17.0
3	#17070.00	48.6 PK	68.2	-19.6	1.39 H	170	28.2	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

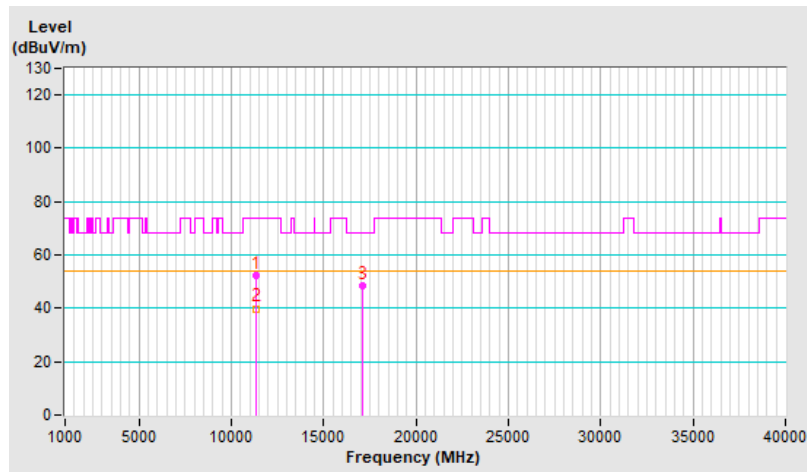




RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	52.2 PK	74.0	-21.8	2.15 V	182	35.2	17.0
2	11380.00	39.7 AV	54.0	-14.3	2.15 V	182	22.7	17.0
3	#17070.00	48.8 PK	68.2	-19.4	1.60 V	28	28.4	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

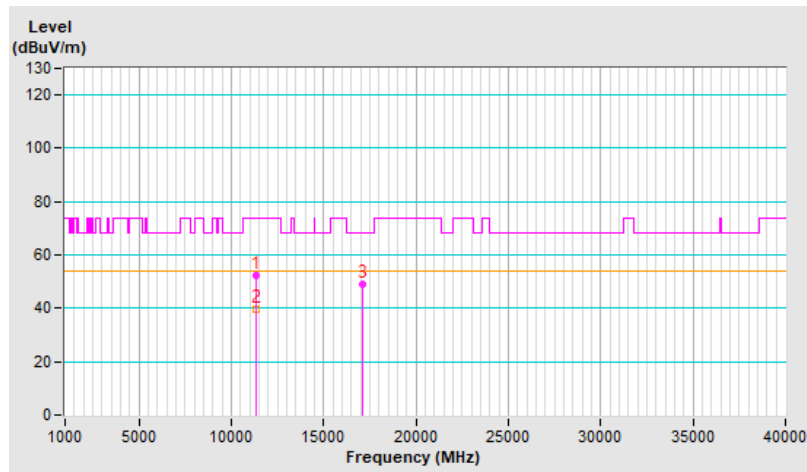


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	49.1 PK	68.2	-19.1	3.47 H	60	33.2	15.9
2	15750.00	48.6 PK	74.0	-25.4	1.48 H	155	31.4	17.2
3	15750.00	36.1 AV	54.0	-17.9	1.48 H	155	18.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

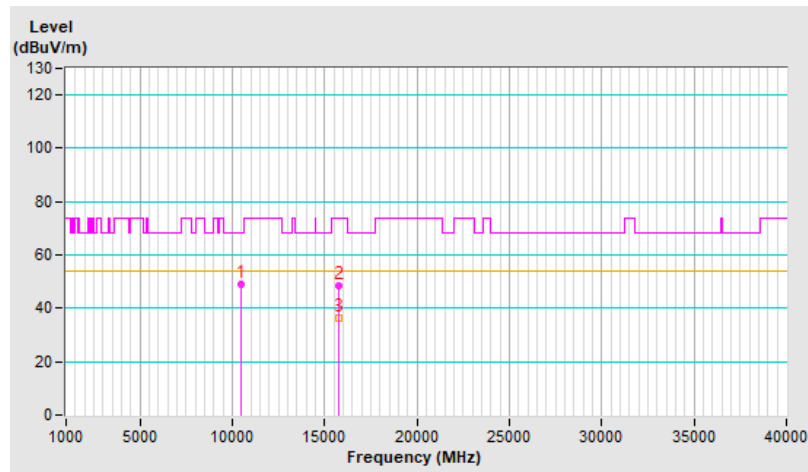


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.8 PK	68.2	-19.4	1.99 V	202	32.9	15.9
2	15750.00	48.1 PK	74.0	-25.9	1.50 V	71	30.9	17.2
3	15750.00	36.1 AV	54.0	-17.9	1.50 V	71	18.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

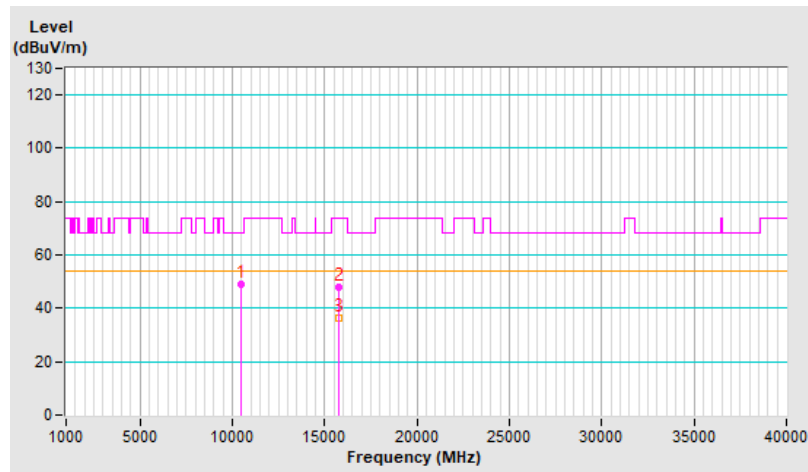


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.6 PK	74.0	-25.4	3.48 H	55	31.9	16.7
2	11140.00	37.6 AV	54.0	-16.4	3.48 H	55	20.9	16.7
3	#16710.00	48.5 PK	68.2	-19.7	1.48 H	156	27.0	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

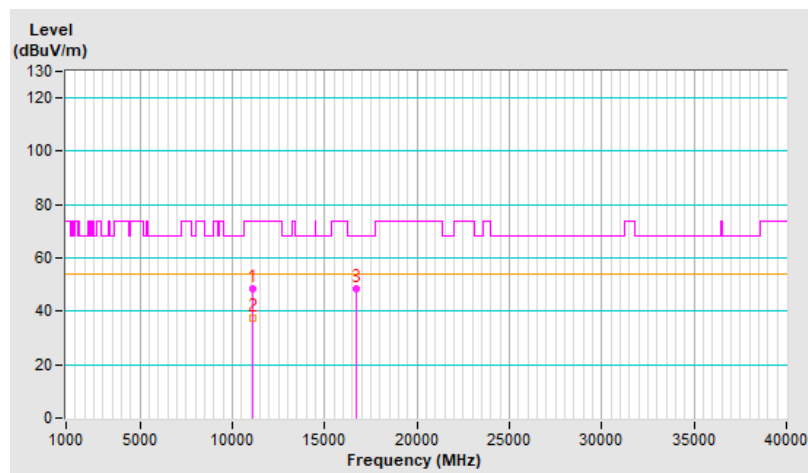


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.5 PK	74.0	-25.5	2.01 V	200	31.8	16.7
2	11140.00	37.1 AV	54.0	-16.9	2.01 V	200	20.4	16.7
3	#16710.00	48.2 PK	68.2	-20.0	1.52 V	71	26.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

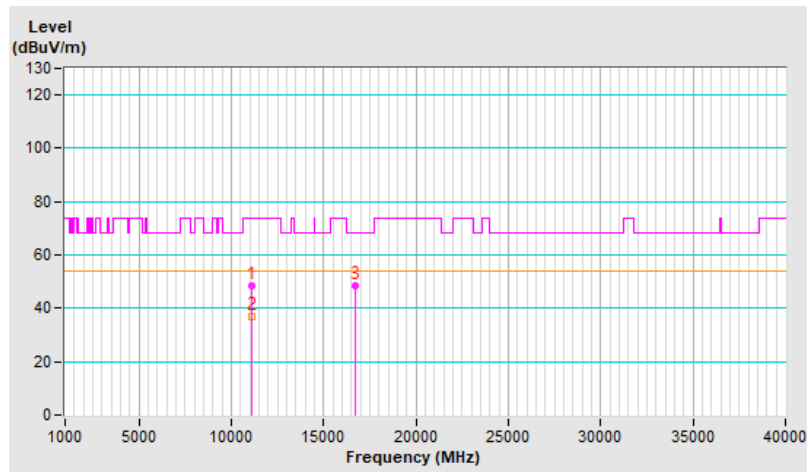


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.7 PK	68.2	-19.5	3.50 H	52	32.8	15.9
2	15750.00	48.5 PK	74.0	-25.5	1.43 H	152	31.3	17.2
3	15750.00	36.3 AV	54.0	-17.7	1.43 H	152	19.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

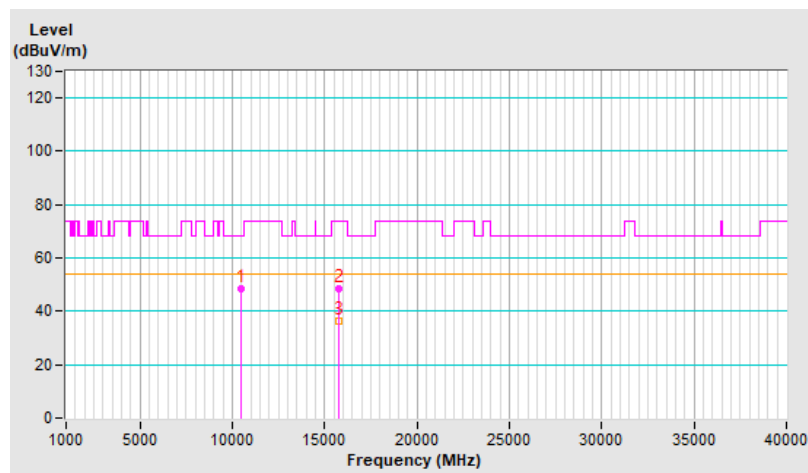




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	48.9 PK	68.2	-19.3	3.51 V	56	33.0	15.9
2	15750.00	48.1 PK	74.0	-25.9	1.54 V	159	30.9	17.2
3	15750.00	35.8 AV	54.0	-18.2	1.54 V	159	18.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

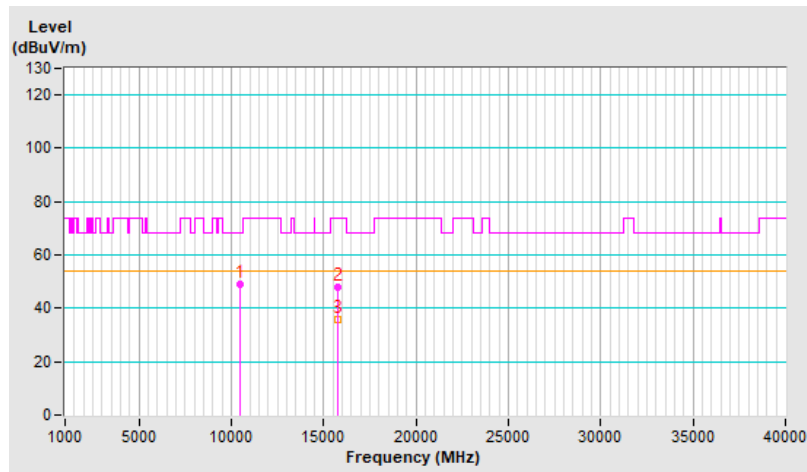




RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	48.7 PK	74.0	-25.3	3.48 H	48	32.0	16.7
2	11140.00	37.5 AV	54.0	-16.5	3.48 H	48	20.8	16.7
3	#16710.00	48.7 PK	68.2	-19.5	1.54 H	143	27.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

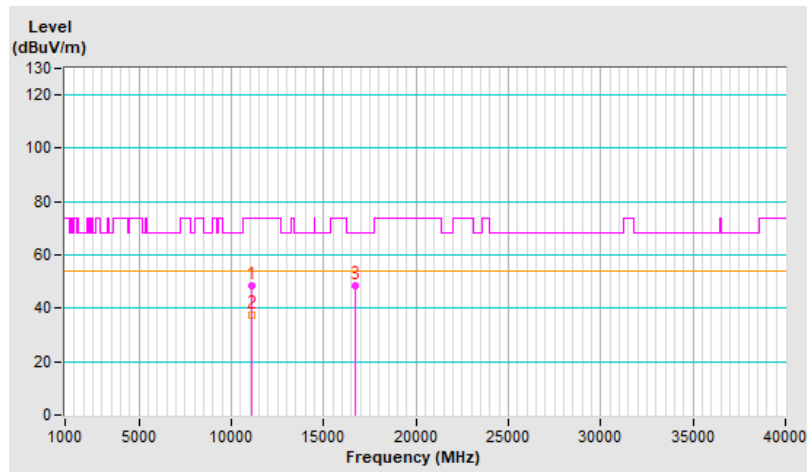


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	49.0 PK	74.0	-25.0	2.00 V	187	32.3	16.7
2	11140.00	37.4 AV	54.0	-16.6	2.00 V	187	20.7	16.7
3	#16710.00	48.0 PK	68.2	-20.2	1.46 V	80	26.5	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

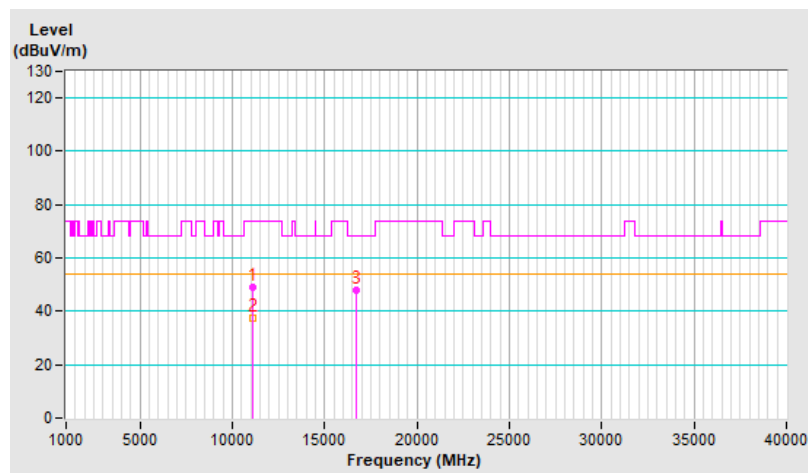

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---