


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2465.66	116.48 PK			13.01	10.73	6.19	21.22
2	*2466.16	106.63 AV			2.09	2.24	6.19	11.37
3	2337.26	63.9 PK	74	-10.1	-43.08	-38.97	6.19	-31.36
4	2364.91	51.98 AV	54	-2.02	-52.27	-52.71	6.19	-43.28
5	2483.71	65.51 PK	74	-8.49	-38.15	-39.94	6.19	-29.75
<b>6</b>	<b>2483.5</b>	<b>53.99 AV</b>	<b>54</b>	<b>-0.01</b>	<b>-50.62</b>	<b>-50.33</b>	<b>6.19</b>	<b>-41.31</b>

- Notes:
- Margin value = Emission Level - Limit value
  - " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

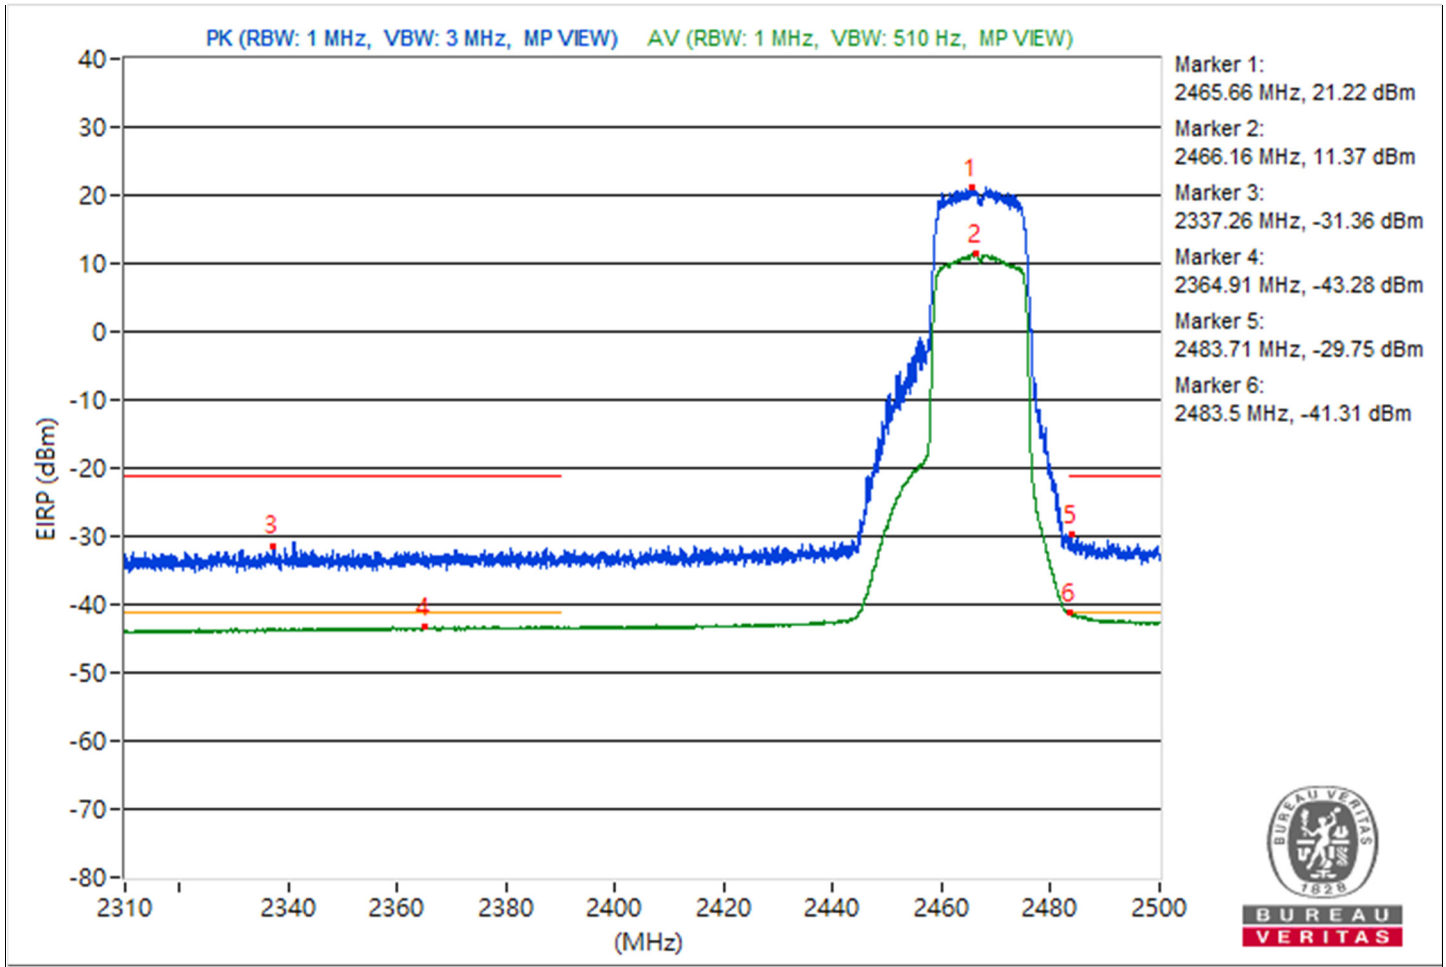


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2472.57	113.44 PK			10	7.66	6.19	18.18
2	*2472.85	103.32 AV			-1.35	-0.94	6.19	8.06
3	2374.27	63.84 PK	74	-10.16	-39.25	-42.63	6.19	-31.42
4	2388.28	51.89 AV	54	-2.11	-52.33	-52.82	6.19	-43.37
5	2486.06	64.86 PK	74	-9.14	-39	-40.3	6.19	-30.4
6	2483.54	53.85 AV	54	-0.15	-50.38	-50.86	6.19	-41.41

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

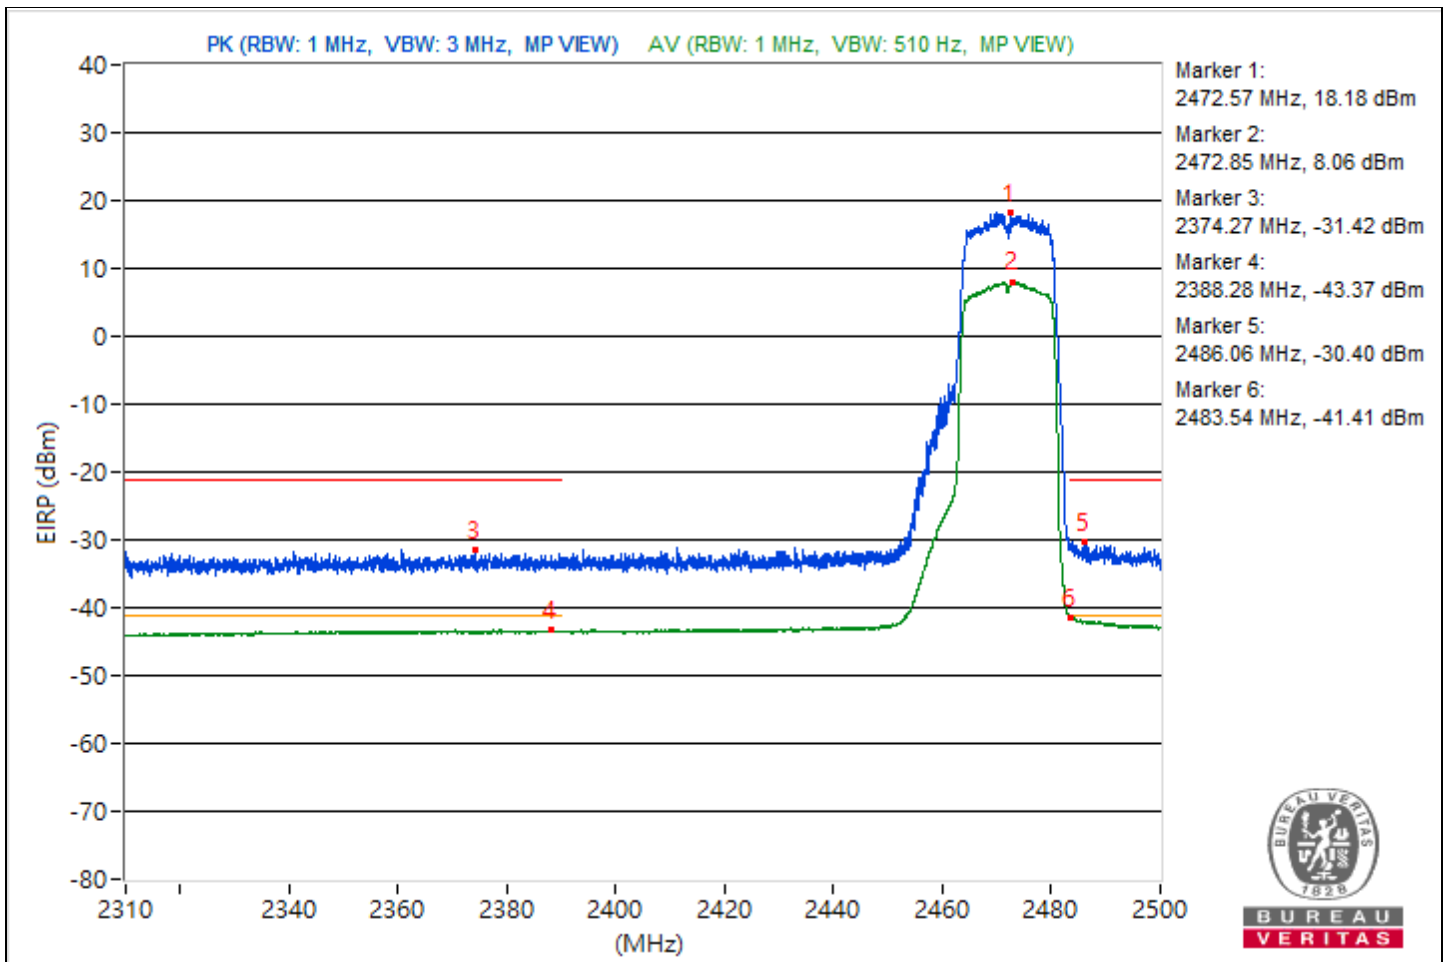


For 2S2T

Conducted Unwanted Emissions

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.41	54.17 PK	74	-19.83	-50.34	-48	4.92	-41.09
2	2332.41	44.14 AV	54	-9.86	-58.8	-59.31	4.92	-51.12
3	3767.8	56.52 PK	74	-17.48	-48.54	-45.37	4.92	-38.74
4	3735.06	45.49 AV	54	-8.51	-57.97	-57.44	4.92	-49.77
5	8192.36	55.07 PK	74	-18.93	-51.23	-46.34	4.92	-40.19
6	14477.51	44.26 AV	54	-9.74	-58.76	-59.11	4.92	-51
7	22533.1	58.91 PK	74	-15.09	-42.95	-46.22	4.92	-36.35
8	23760.4	48.21 AV	54	-5.79	-55.45	-54.55	4.92	-47.05


Note: Margin value = Emission Level - Limit value

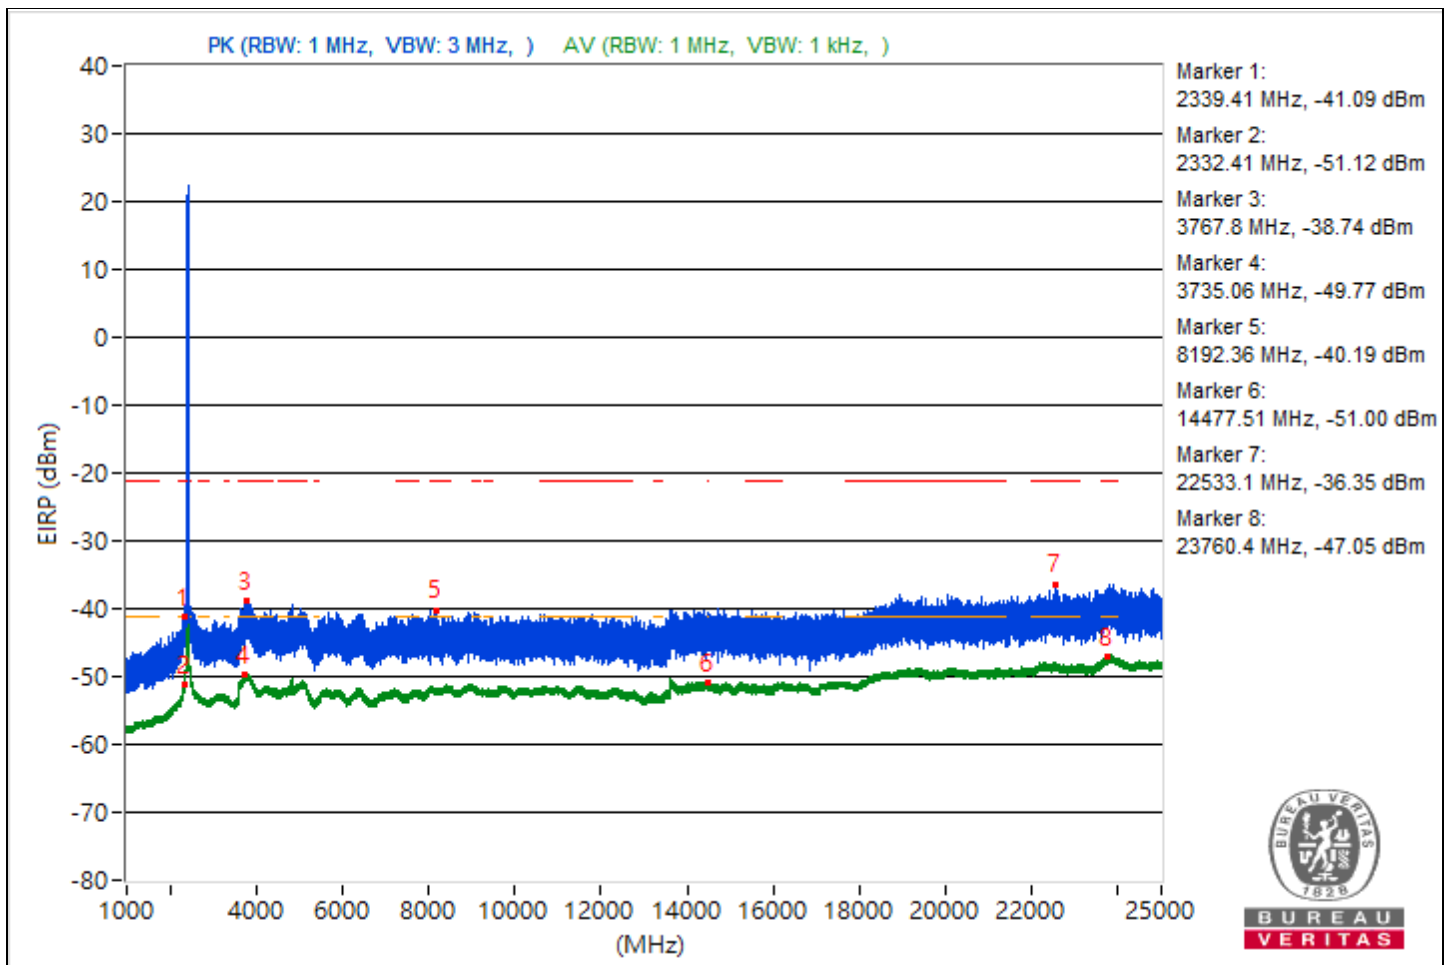

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.21	54.48 PK	74	-19.52	-51.22	-47.13	4.92	-40.78
2	2339.88	44.01 AV	54	-9.99	-59.35	-59.03	4.92	-51.25
3	3878.87	57.32 PK	74	-16.68	-47.29	-44.81	4.92	-37.94
4	3785.07	45.57 AV	54	-8.43	-58.07	-57.21	4.92	-49.69
5	8439.02	54.99 PK	74	-19.01	-46.61	-50.73	4.92	-40.27
6	14498.31	44.21 AV	54	-9.79	-59.32	-58.68	4.92	-51.05
7	23807	59.37 PK	74	-14.63	-47.35	-41.9	4.92	-35.89
8	23843.7	48.31 AV	54	-5.69	-55.27	-54.52	4.92	-46.95


Note: Margin value = Emission Level - Limit value

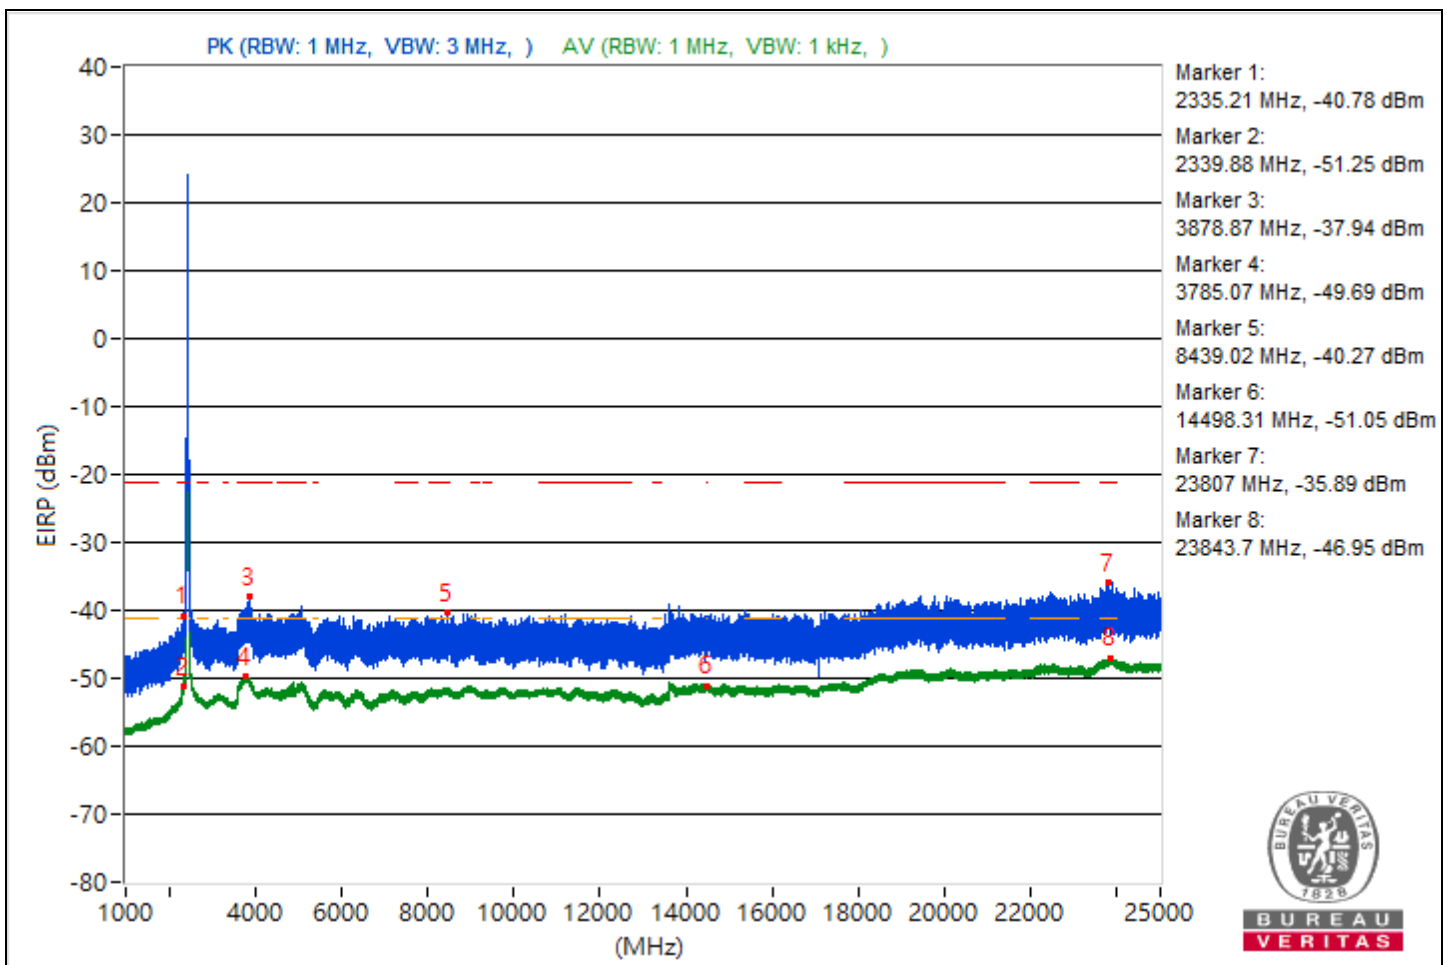

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.12	52.17 PK	74	-21.83	-49.36	-53.74	4.92	-43.09
2	2336.07	43.15 AV	54	-10.85	-60.29	-59.8	4.92	-52.11
3	3854.13	56.76 PK	74	-17.24	-47.59	-45.52	4.92	-38.5
4	3821.31	45.57 AV	54	-8.43	-57.3	-57.98	4.92	-49.69
5	9105.24	54.33 PK	74	-19.67	-46.6	-53.83	4.92	-40.93
6	14495.73	44.36 AV	54	-9.64	-58.97	-58.69	4.92	-50.9
7	23769.8	57.8 PK	74	-16.2	-50.36	-43.13	4.92	-37.46
8	23818.4	48.35 AV	54	-5.65	-55.01	-54.67	4.92	-46.91


Note: Margin value = Emission Level - Limit value

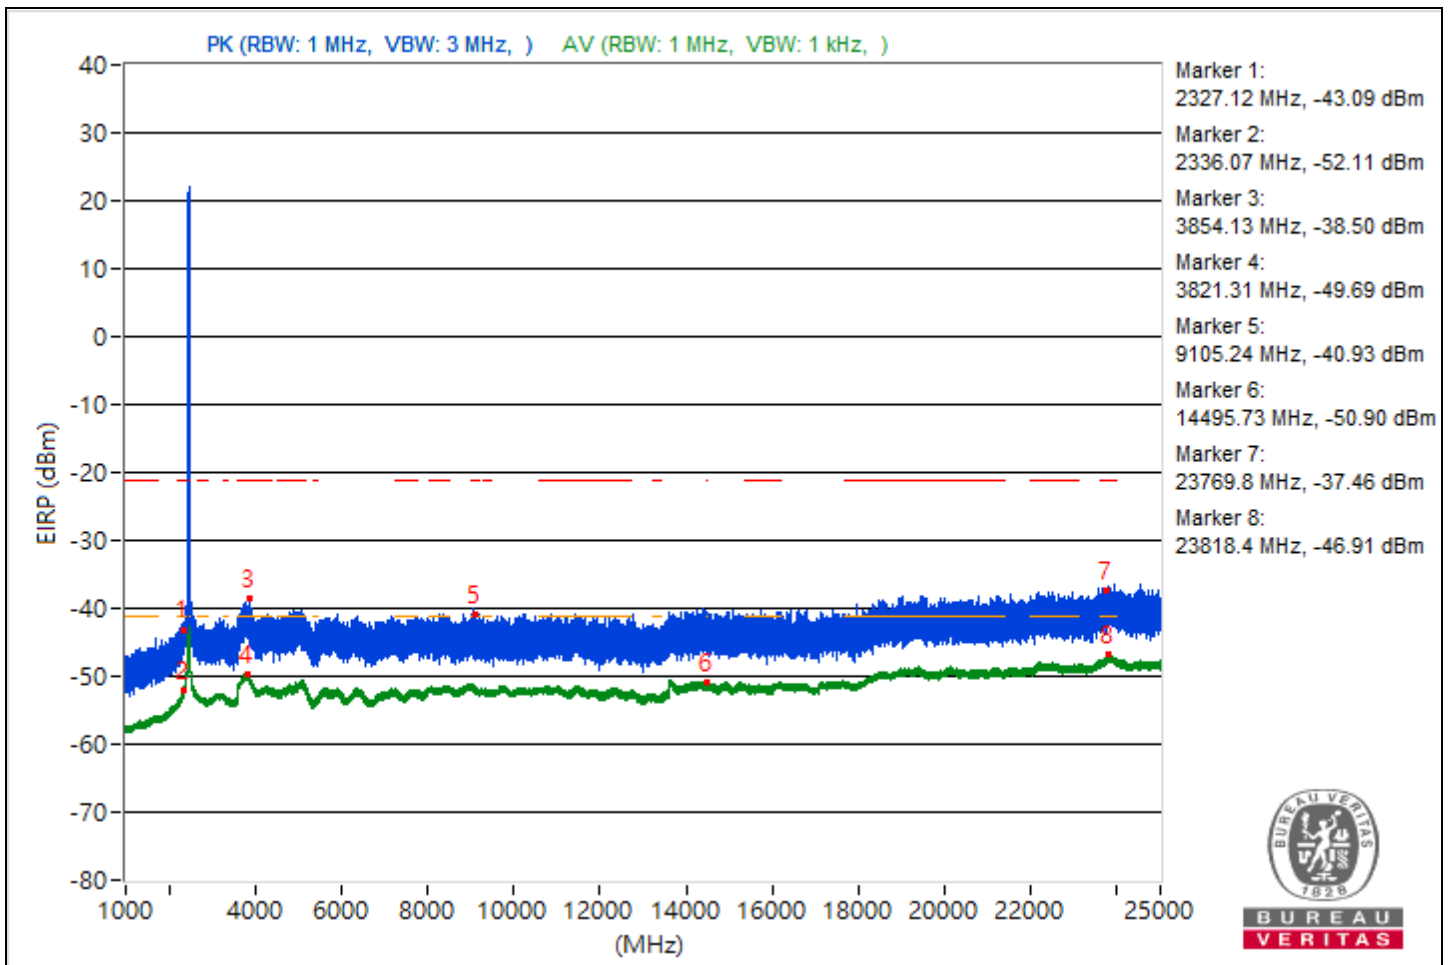

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2325.96	53.02 PK	74	-20.98	-52.2	-48.79	4.92	-42.24
2	2338.24	42.82 AV	54	-11.18	-60.06	-60.69	4.92	-52.44
3	3766.17	55.82 PK	74	-18.18	-51.18	-45.37	4.92	-39.44
4	3806.3	45.53 AV	54	-8.47	-57.47	-57.86	4.92	-49.73
5	11764.09	54.36 PK	74	-19.64	-54.66	-46.43	4.92	-40.9
6	14477.6	44.28 AV	54	-9.72	-58.68	-59.15	4.92	-50.98
7	23912.2	58.67 PK	74	-15.33	-47.76	-42.68	4.92	-36.59
8	23846.7	48.32 AV	54	-5.68	-54.53	-55.25	4.92	-46.94


Note: Margin value = Emission Level - Limit value

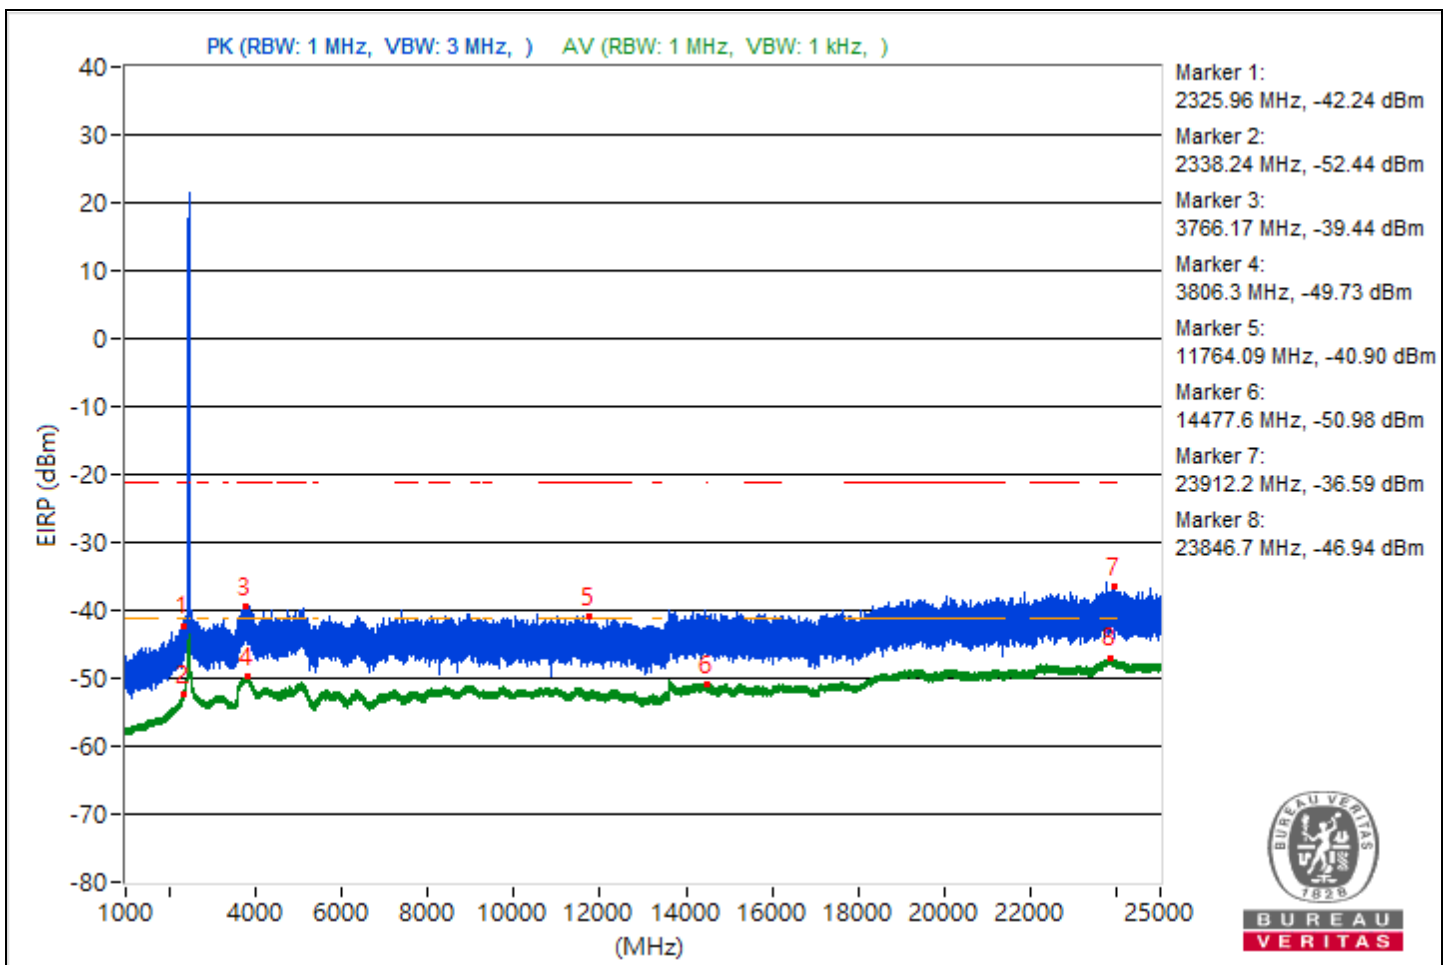

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2331.24	54.29 PK	74	-19.71	-47.93	-50.15	4.92	-40.97
2	2337.86	42.79 AV	54	-11.21	-60.31	-60.49	4.92	-52.47
3	3860.74	55.95 PK	74	-18.05	-45.89	-49.2	4.92	-39.31
4	3804.51	45.43 AV	54	-8.57	-57.5	-58.04	4.92	-49.83
5	9052.71	55.58 PK	74	-18.42	-46.1	-49.94	4.92	-39.68
6	14497.24	44.33 AV	54	-9.67	-59.06	-58.67	4.92	-50.93
7	23641	59.14 PK	74	-14.86	-42.59	-46.27	4.92	-36.12
8	23795.4	48.46 AV	54	-5.54	-54.99	-54.49	4.92	-46.8


Note: Margin value = Emission Level - Limit value

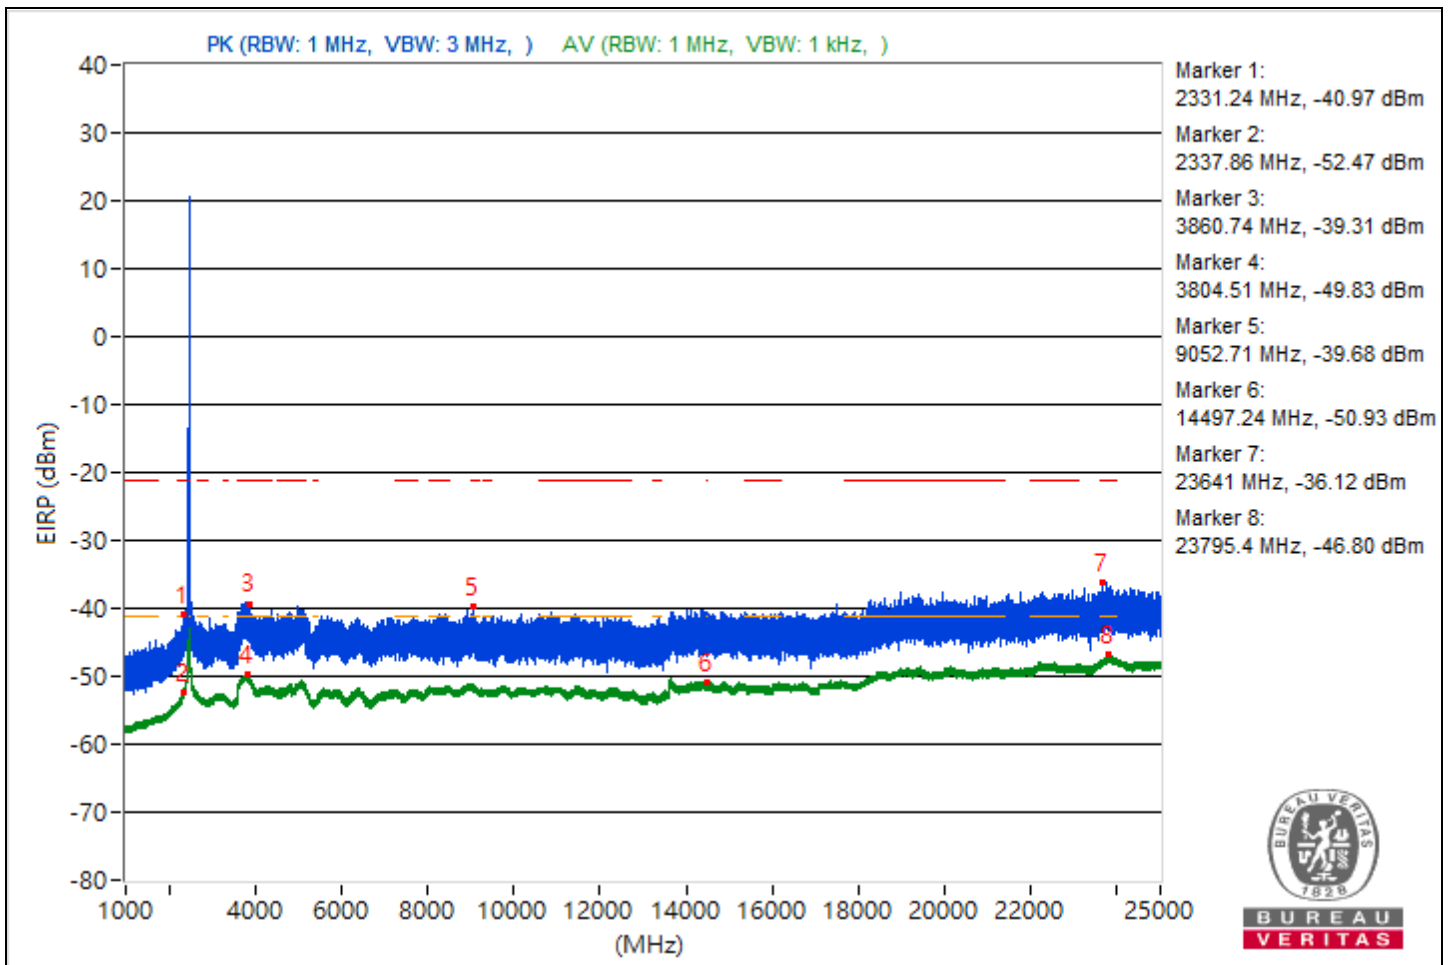

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.64	54.38 PK	74	-19.62	-51.93	-47.01	4.92	-40.88
2	2338.32	43.65 AV	54	-10.35	-59.34	-59.74	4.92	-51.61
3	3695.54	56.1 PK	74	-17.9	-49.46	-45.56	4.92	-39.16
4	3807.16	45.52 AV	54	-8.48	-57.91	-57.45	4.92	-49.74
5	9060.36	54.96 PK	74	-19.04	-51.44	-46.41	4.92	-40.3
6	15731.56	44.15 AV	54	-9.85	-58.62	-59.51	4.92	-51.11
7	23956.5	58.78 PK	74	-15.22	-45.78	-43.37	4.92	-36.48
8	23894	48.3 AV	54	-5.7	-54.69	-55.09	4.92	-46.96

Note: Margin value = Emission Level - Limit value

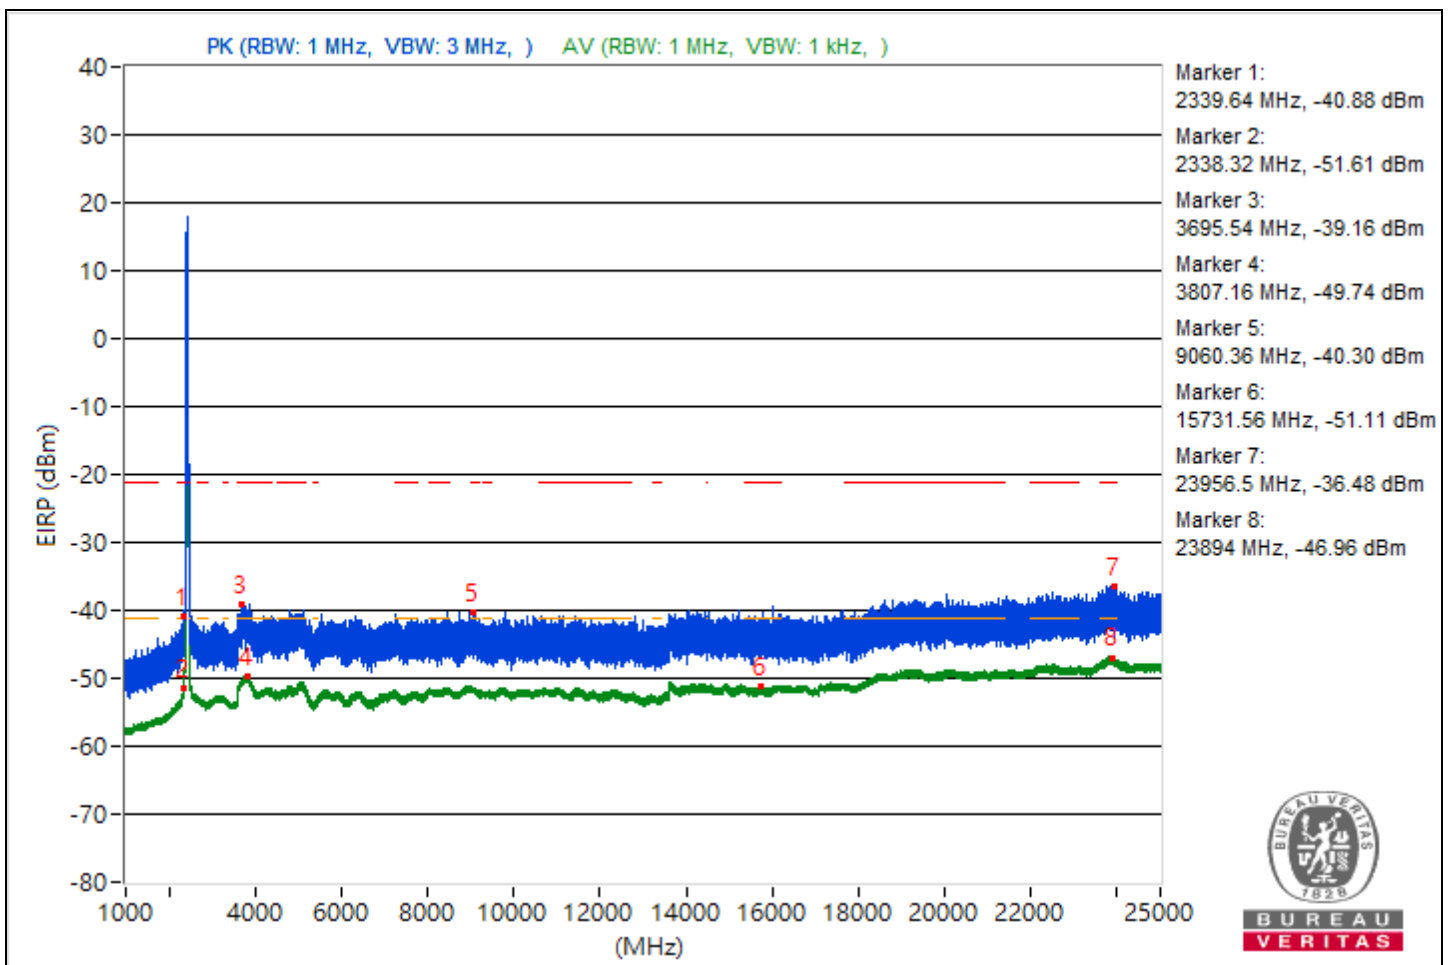




RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2289.79	53.23 PK	74	-20.77	-48.2	-52.95	4.92	-42.03
2	2338.56	44.31 AV	54	-9.69	-58.98	-58.77	4.92	-50.95
3	3770.76	55.86 PK	74	-18.14	-51.06	-45.35	4.92	-39.4
4	3799.14	45.53 AV	54	-8.47	-57.41	-57.91	4.92	-49.73
5	15601.87	55.18 PK	74	-18.82	-45.94	-52.08	4.92	-40.08
6	14485.42	44.02 AV	54	-9.98	-58.71	-59.68	4.92	-51.24
7	23892.5	59.03 PK	74	-14.97	-42.2	-47.84	4.92	-36.23
8	23837.4	48.39 AV	54	-5.61	-55.07	-54.55	4.92	-46.87


Note: Margin value = Emission Level - Limit value

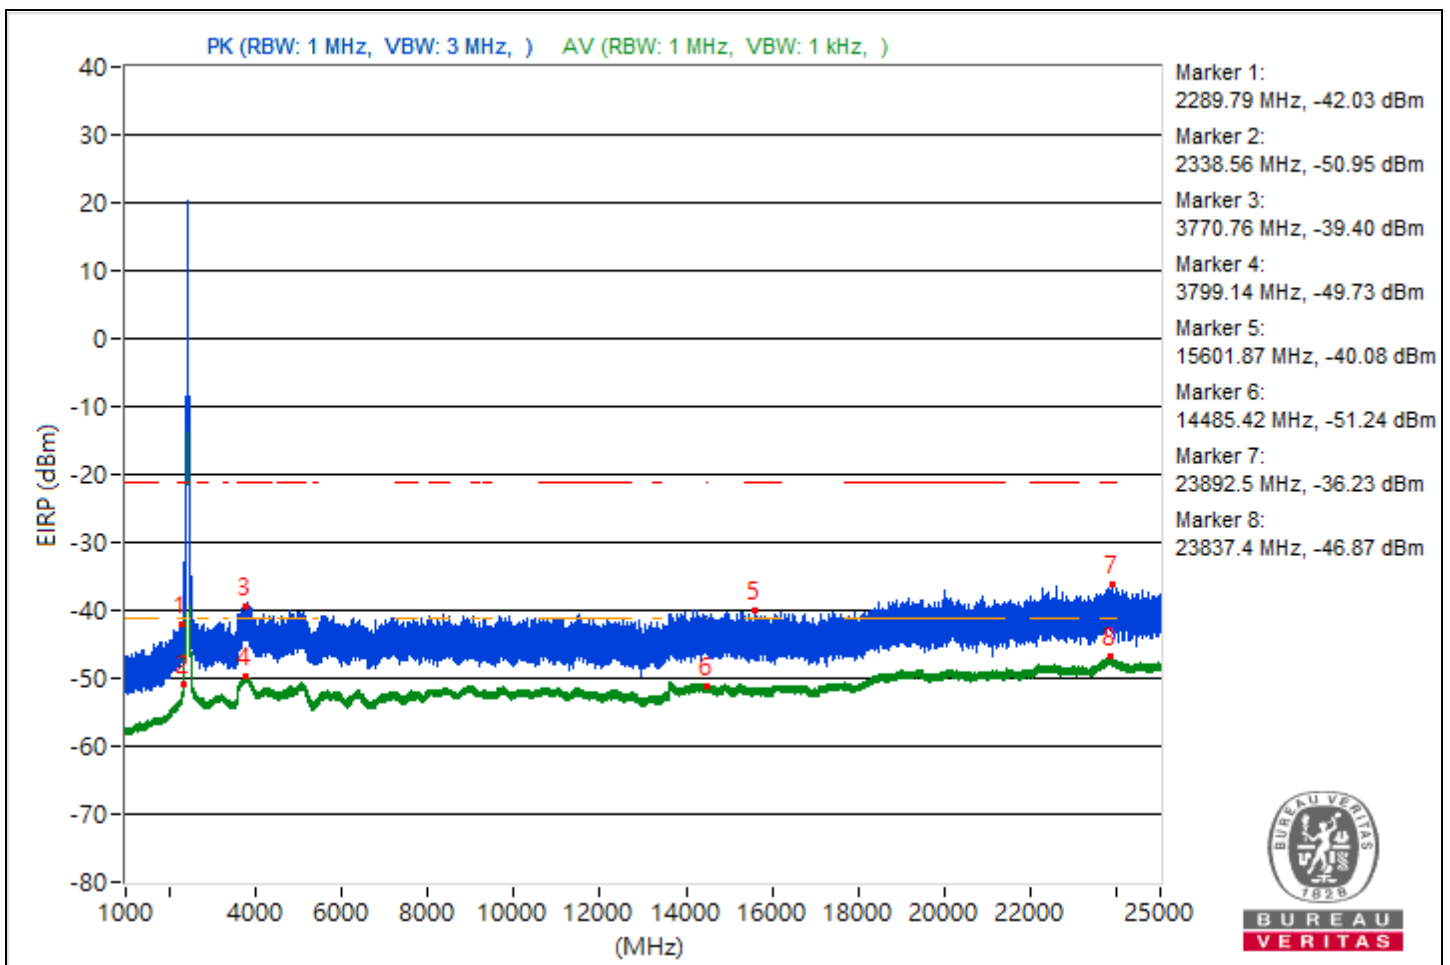

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.96	53.2 PK	74	-20.8	-52.12	-48.56	4.92	-42.06
2	2339.96	43.35 AV	54	-10.65	-59.69	-59.99	4.92	-51.91
3	3823.8	57.02 PK	74	-16.98	-47.32	-45.26	4.92	-38.24
4	3786.78	45.38 AV	54	-8.62	-58.34	-57.34	4.92	-49.88
5	15414.4	54.7 PK	74	-19.3	-46.81	-51.28	4.92	-40.56
6	14488.27	44.22 AV	54	-9.78	-58.75	-59.19	4.92	-51.04
7	23874.8	58.5 PK	74	-15.5	-48.11	-42.8	4.92	-36.76
8	23808.3	48.35 AV	54	-5.65	-54.56	-55.14	4.92	-46.91


Note: Margin value = Emission Level - Limit value

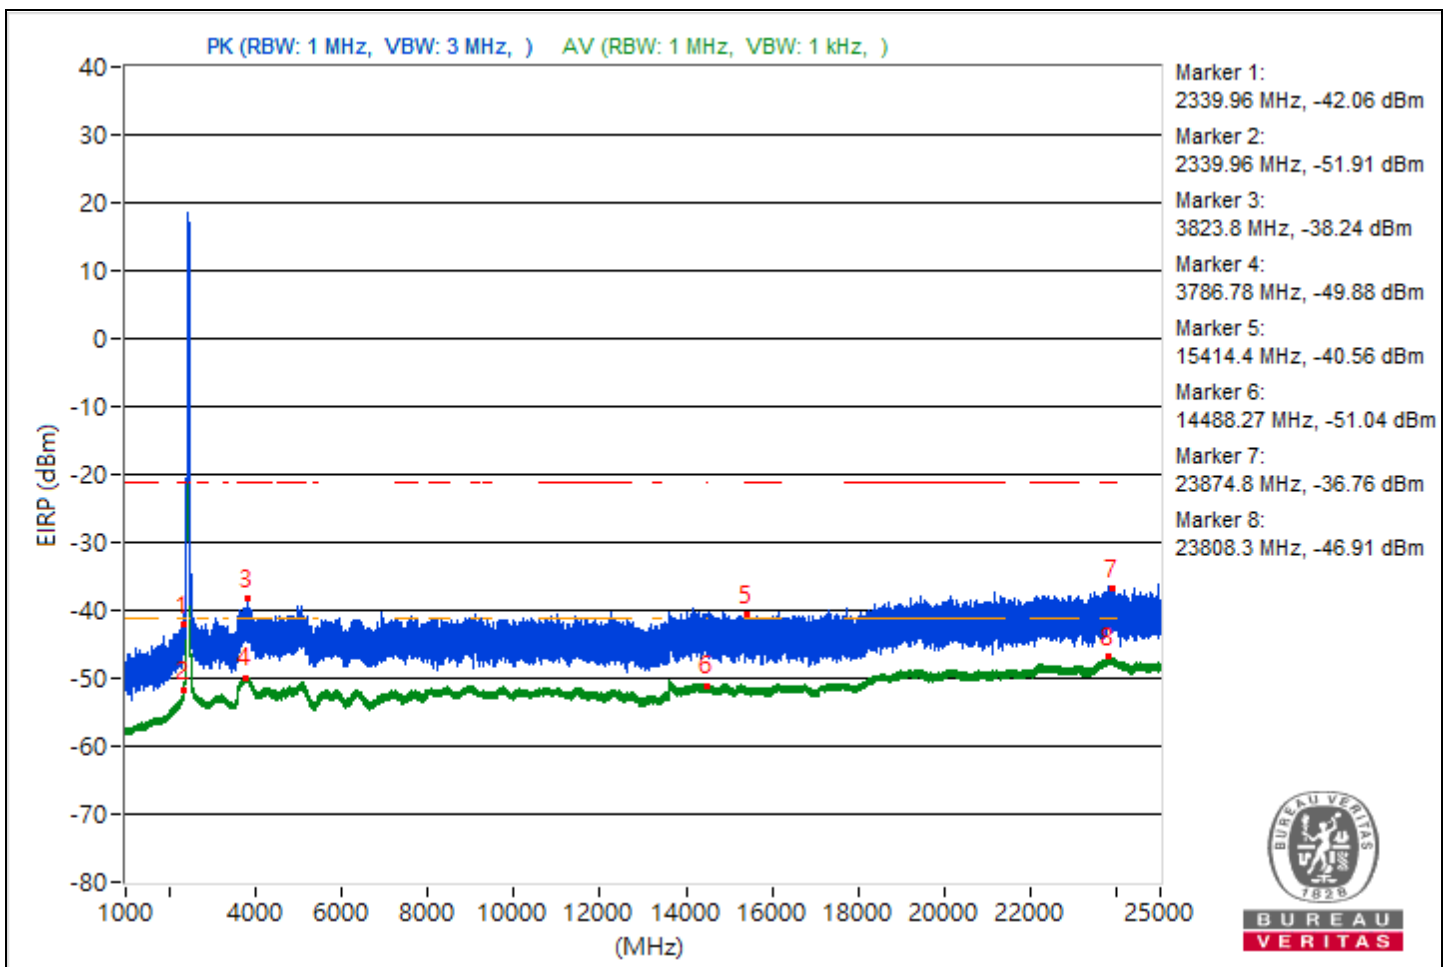

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.83	53.14 PK	74	-20.86	-51.79	-48.82	4.92	-42.12
2	2339.02	43.1 AV	54	-10.9	-60.15	-60.02	4.92	-52.16
3	3821.31	57.32 PK	74	-16.68	-46.54	-45.29	4.92	-37.94
4	3810.89	45.41 AV	54	-8.59	-57.49	-58.09	4.92	-49.85
5	15782.13	54.91 PK	74	-19.09	-51.84	-46.35	4.92	-40.35
6	14480	44.24 AV	54	-9.76	-58.81	-59.1	4.92	-51.02
7	23917.3	58.56 PK	74	-15.44	-42.98	-47.35	4.92	-36.7
8	23859.7	48.31 AV	54	-5.69	-54.59	-55.19	4.92	-46.95


Note: Margin value = Emission Level - Limit value

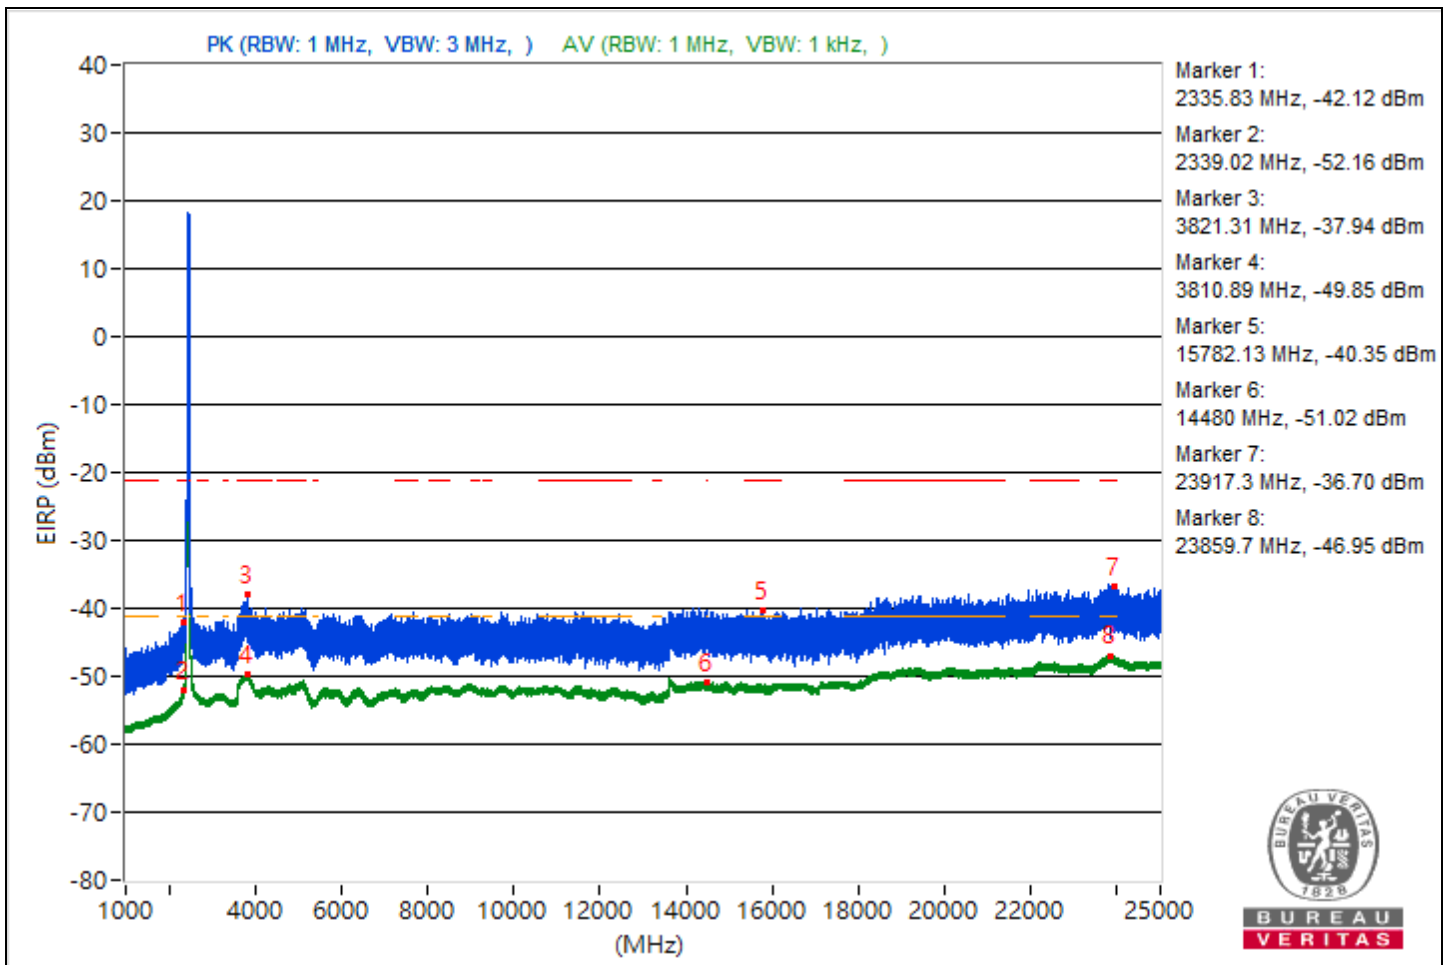

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2227.26	53.12 PK	74	-20.88	-48.11	-53.74	4.92	-42.14
2	2330.23	42.75 AV	54	-11.25	-60.85	-60.06	4.92	-52.51
3	3869.84	55.32 PK	74	-18.68	-51.75	-45.85	4.92	-39.94
4	3782.89	45.57 AV	54	-8.43	-57.52	-57.72	4.92	-49.69
5	12432.27	54.93 PK	74	-19.07	-53.09	-46.03	4.92	-40.33
6	14473.24	44.21 AV	54	-9.79	-59.29	-58.7	4.92	-51.05
7	23822.4	58.44 PK	74	-15.56	-50.07	-42.43	4.92	-36.82
8	23786.1	48.32 AV	54	-5.68	-54.58	-55.17	4.92	-46.94


Note: Margin value = Emission Level - Limit value

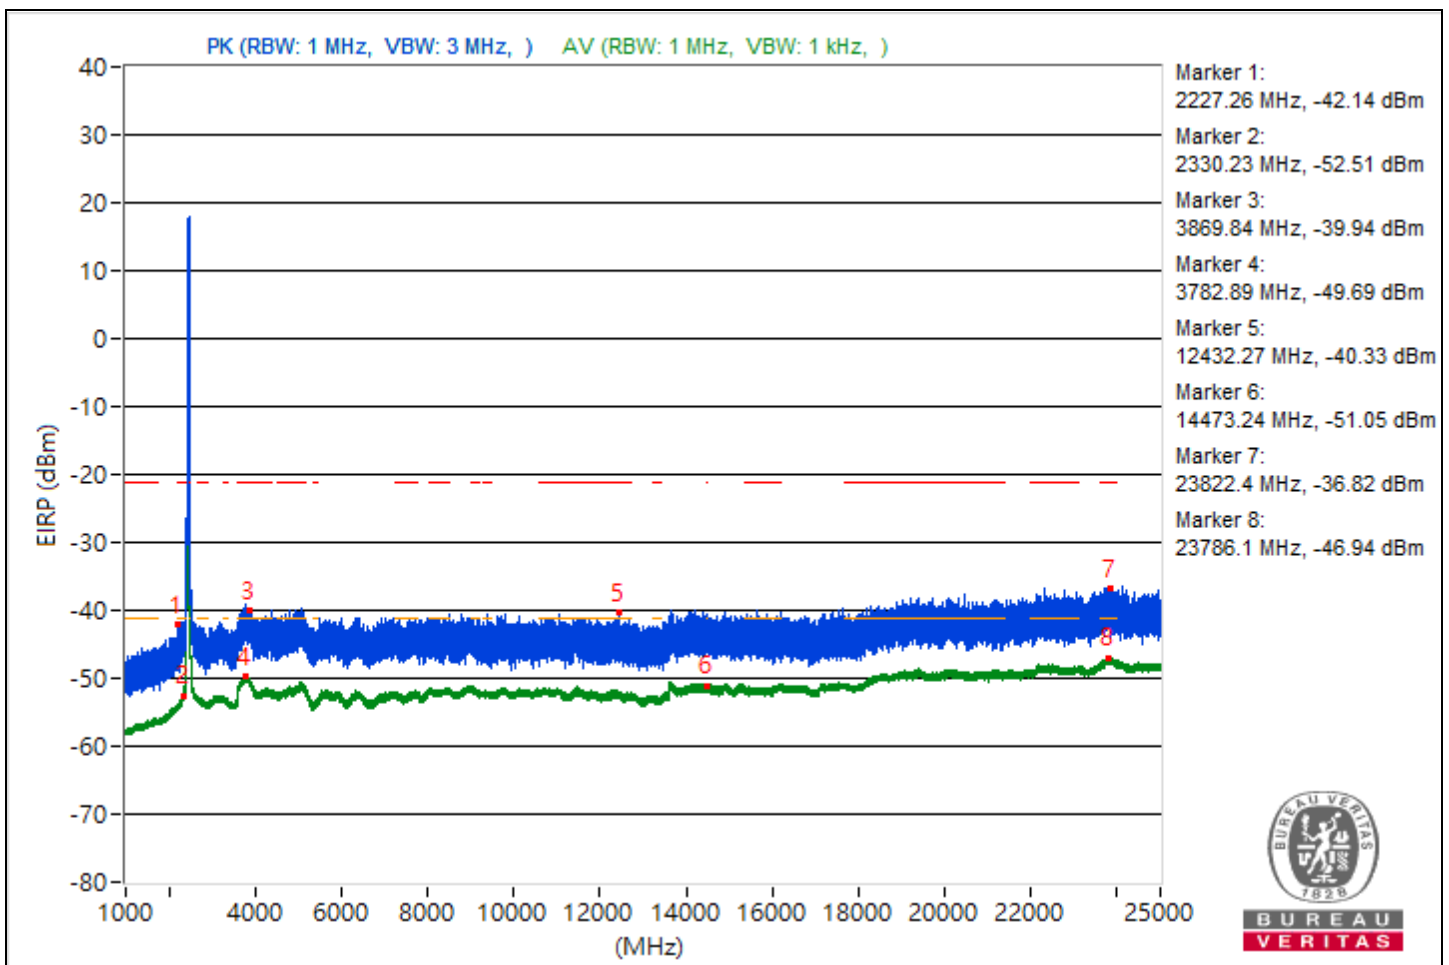

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2325.02	53.38 PK	74	-20.62	-52.06	-48.34	4.92	-41.88
2	2338.4	43.56 AV	54	-10.44	-59.51	-59.74	4.92	-51.7
3	4807.38	58.43 PK	74	-15.57	-45.79	-43.92	4.92	-36.83
4	4807.07	48.34 AV	54	-5.66	-54.7	-55.02	4.92	-46.92
5	9036.71	54.77 PK	74	-19.23	-51.08	-46.78	4.92	-40.49
6	14497.33	44.1 AV	54	-9.9	-59.47	-58.75	4.92	-51.16
7	23871.4	57.88 PK	74	-16.12	-49.36	-43.25	4.92	-37.38
8	23861	48.2 AV	54	-5.8	-54.67	-55.34	4.92	-47.06


Note: Margin value = Emission Level - Limit value

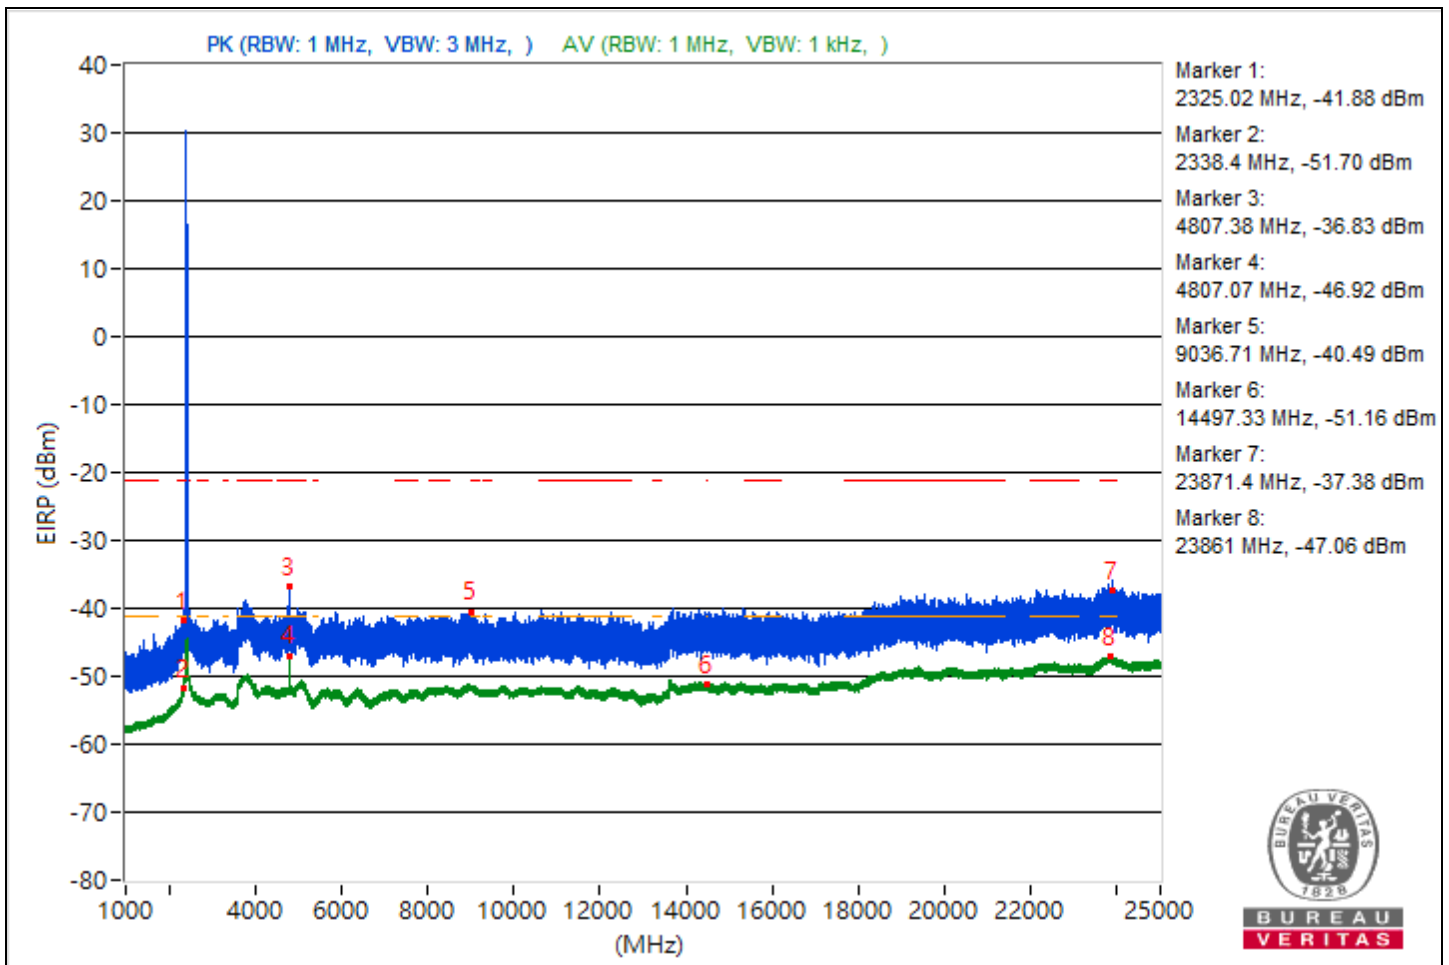

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2321.99	53.52 PK	74	-20.48	-47.7	-53.37	4.92	-41.74
2	2338.94	43.66 AV	54	-10.34	-59.53	-59.53	4.92	-51.6
3	7284.76	57.47 PK	74	-16.53	-44.45	-47.51	4.92	-37.79
4	4857.31	48.48 AV	54	-5.52	-54.13	-55.38	4.92	-46.78
5	10975.64	54.27 PK	74	-19.73	-46.74	-53.51	4.92	-40.99
6	14482.76	44.26 AV	54	-9.74	-58.77	-59.09	4.92	-51
7	23931.5	59.21 PK	74	-14.79	-46.33	-42.46	4.92	-36.05
8	23845	48.37 AV	54	-5.63	-54.33	-55.36	4.92	-46.89


Note: Margin value = Emission Level - Limit value

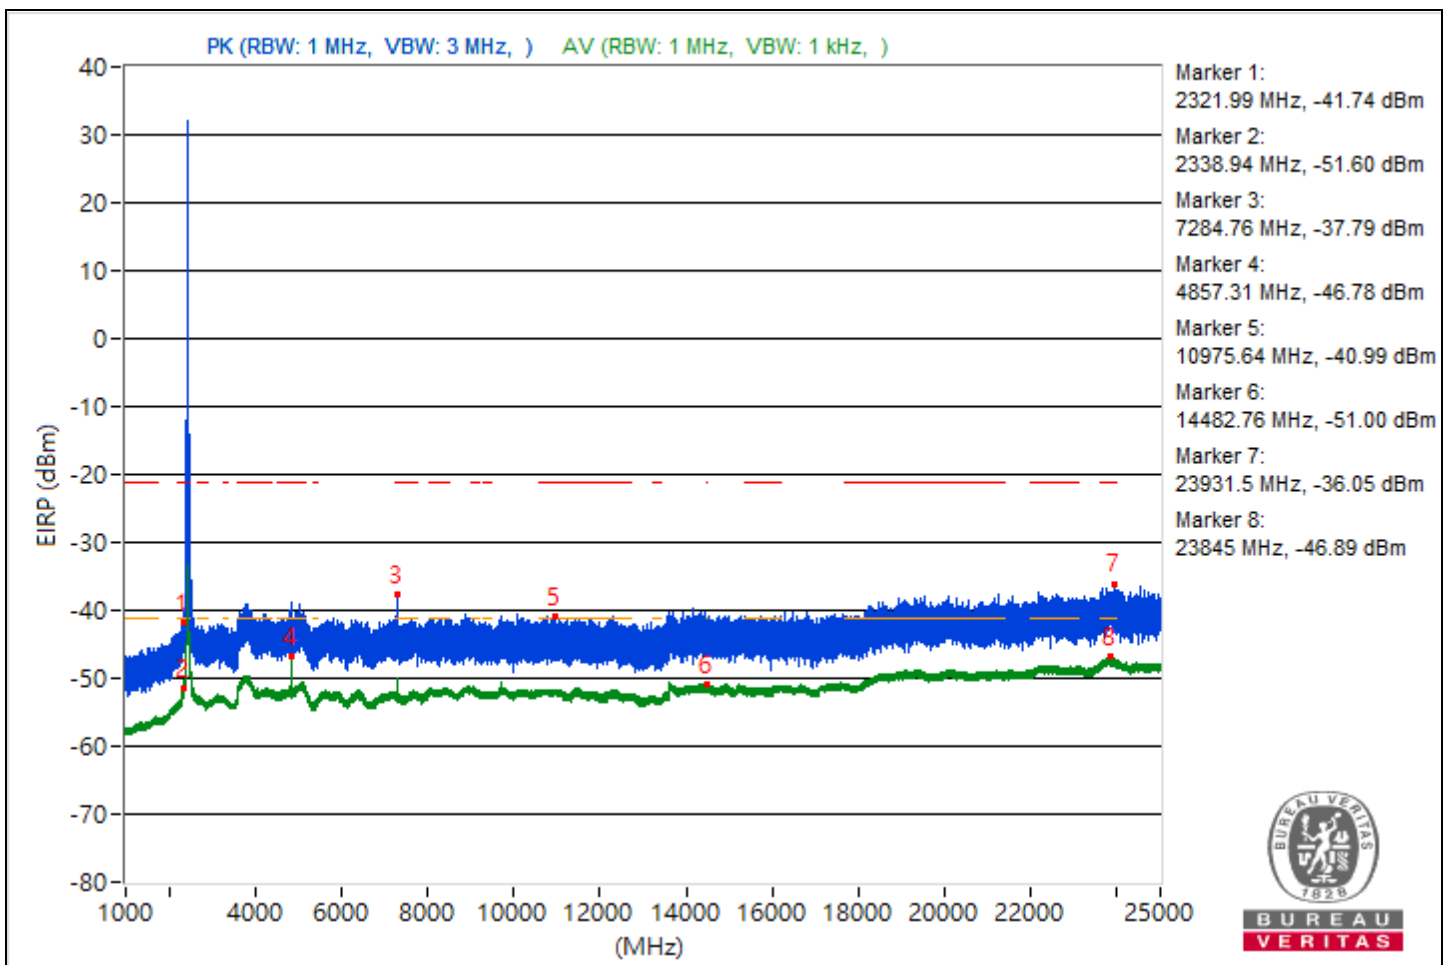

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2284.58	52.44 PK	74	-21.56	-53.82	-48.97	4.92	-42.82
2	2330.62	42.75 AV	54	-11.25	-61.12	-59.85	4.92	-52.51
3	3848.14	57.19 PK	74	-16.81	-47.44	-44.92	4.92	-38.07
4	4941.47	45.71 AV	54	-8.29	-57.4	-57.56	4.92	-49.55
5	9006.04	55.52 PK	74	-18.48	-48.55	-46.94	4.92	-39.74
6	14478.84	44.08 AV	54	-9.92	-59.61	-58.66	4.92	-51.18
7	23679.1	57.84 PK	74	-16.16	-48.99	-43.4	4.92	-37.42
8	23790.4	48.42 AV	54	-5.58	-54.94	-54.61	4.92	-46.84


Note: Margin value = Emission Level - Limit value

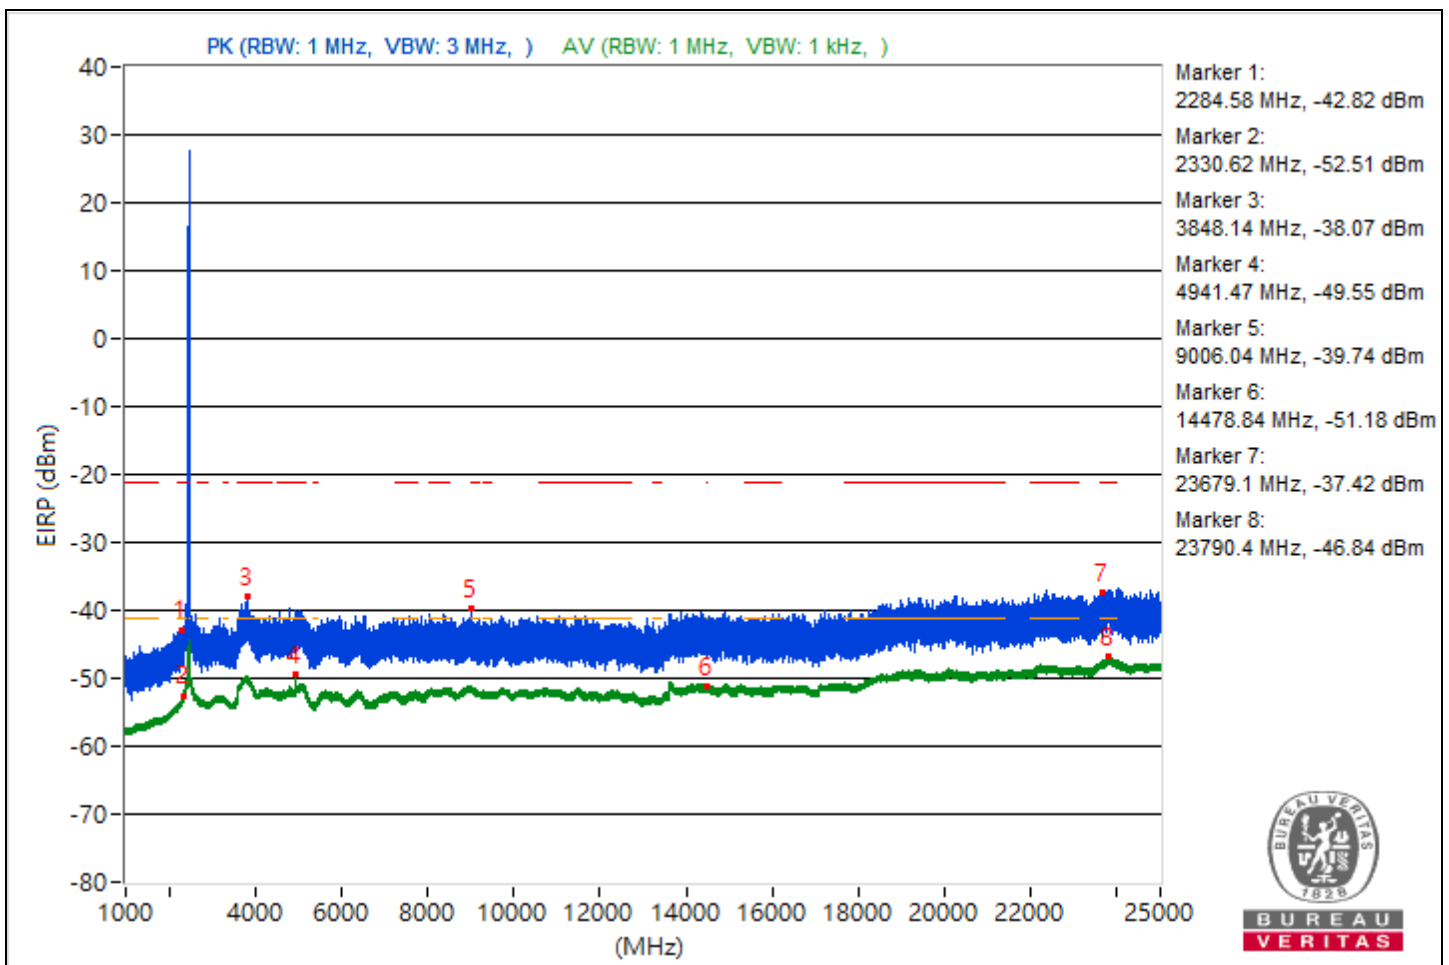

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2326.58	53.19 PK	74	-20.81	-48.64	-51.98	4.92	-42.07
2	2337.78	42.62 AV	54	-11.38	-60.88	-60.29	4.92	-52.64
3	3812.6	57.06 PK	74	-16.94	-44.98	-47.71	4.92	-38.2
4	4950.72	45.53 AV	54	-8.47	-57.89	-57.44	4.92	-49.73
5	10638.31	54.63 PK	74	-19.37	-52.32	-46.57	4.92	-40.63
6	14472	44.35 AV	54	-9.65	-58.96	-58.72	4.92	-50.91
7	23818.5	58.95 PK	74	-15.05	-42.43	-47.4	4.92	-36.31
8	23892.2	48.23 AV	54	-5.77	-55.27	-54.67	4.92	-47.03

Note: Margin value = Emission Level - Limit value

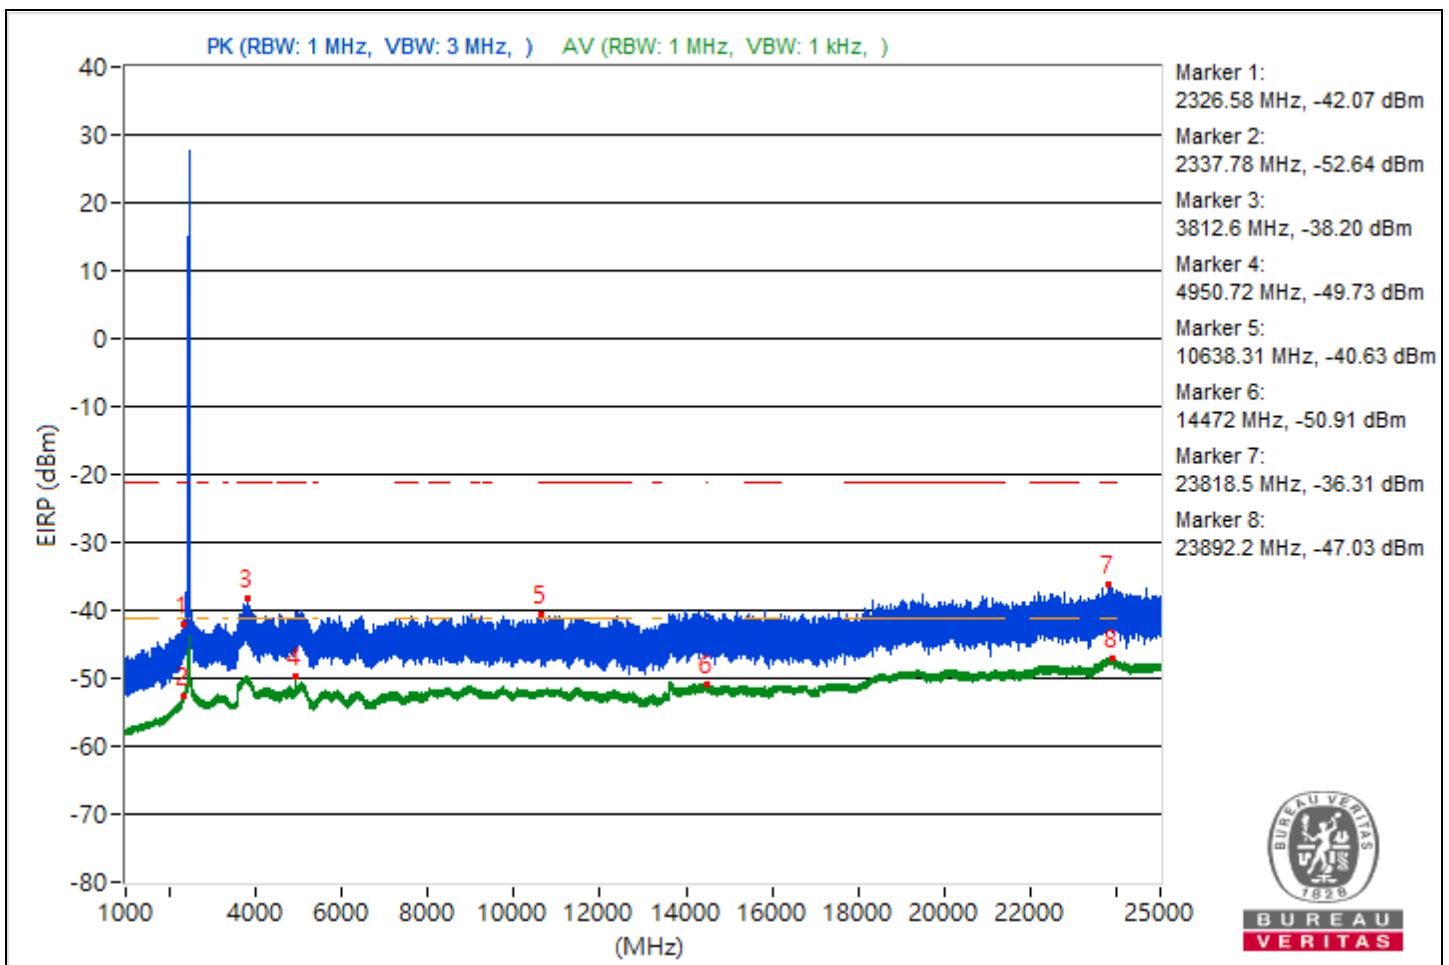




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2242.66	52.64 PK	74	-21.36	-49.39	-52.13	4.92	-42.62
2	2330.16	42.32 AV	54	-11.68	-61.13	-60.64	4.92	-52.94
3	3735.44	56.15 PK	74	-17.85	-45.41	-49.68	4.92	-39.11
4	3801.71	45.42 AV	54	-8.58	-58.16	-57.42	4.92	-49.84
5	15415.64	55.16 PK	74	-18.84	-50.14	-46.62	4.92	-40.1
6	14486.22	44.27 AV	54	-9.73	-58.61	-59.25	4.92	-50.99
7	20149.2	58.08 PK	74	-15.92	-42.91	-49.79	4.92	-37.18
8	23837.6	48.25 AV	54	-5.75	-54.63	-55.28	4.92	-47.01


Note: Margin value = Emission Level - Limit value

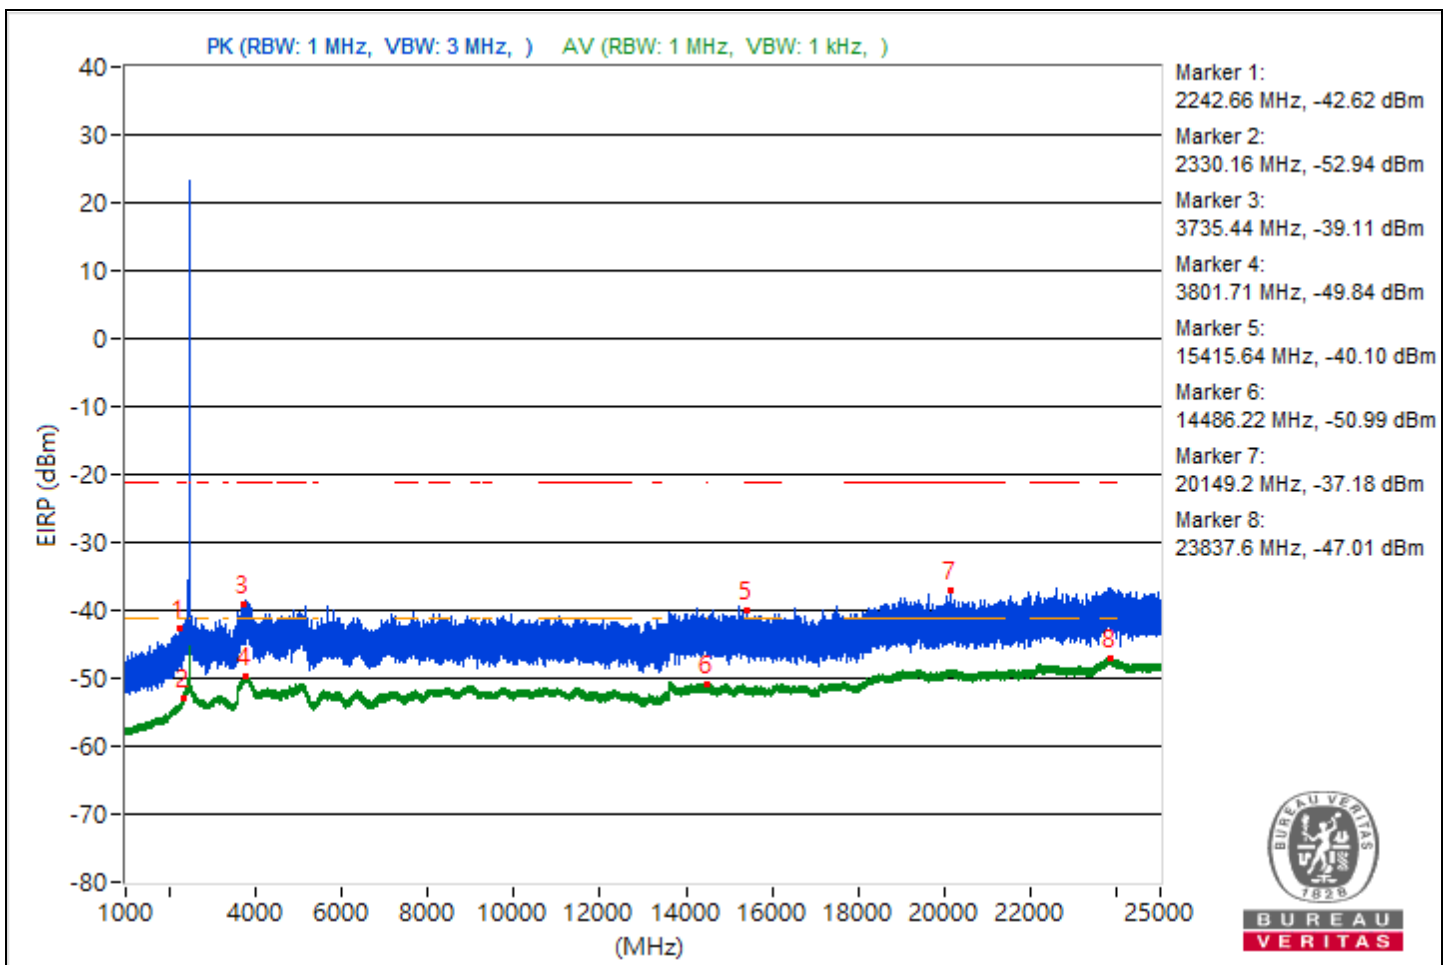

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2322.77	54.04 PK	74	-19.96	-47.61	-51.56	4.92	-41.22
2	2336.84	43.66 AV	54	-10.34	-59.82	-59.25	4.92	-51.6
3	3695.86	56.67 PK	74	-17.33	-48.29	-45.26	4.92	-38.59
4	4809.56	45.98 AV	54	-8.02	-57.17	-57.25	4.92	-49.28
5	9318.04	54.85 PK	74	-19.15	-53.54	-46.04	4.92	-40.41
6	14494.31	44.15 AV	54	-9.85	-58.78	-59.33	4.92	-51.11
7	23907.1	58.39 PK	74	-15.61	-42.47	-50.2	4.92	-36.87
8	23802.8	48.25 AV	54	-5.75	-55.31	-54.6	4.92	-47.01


Note: Margin value = Emission Level - Limit value

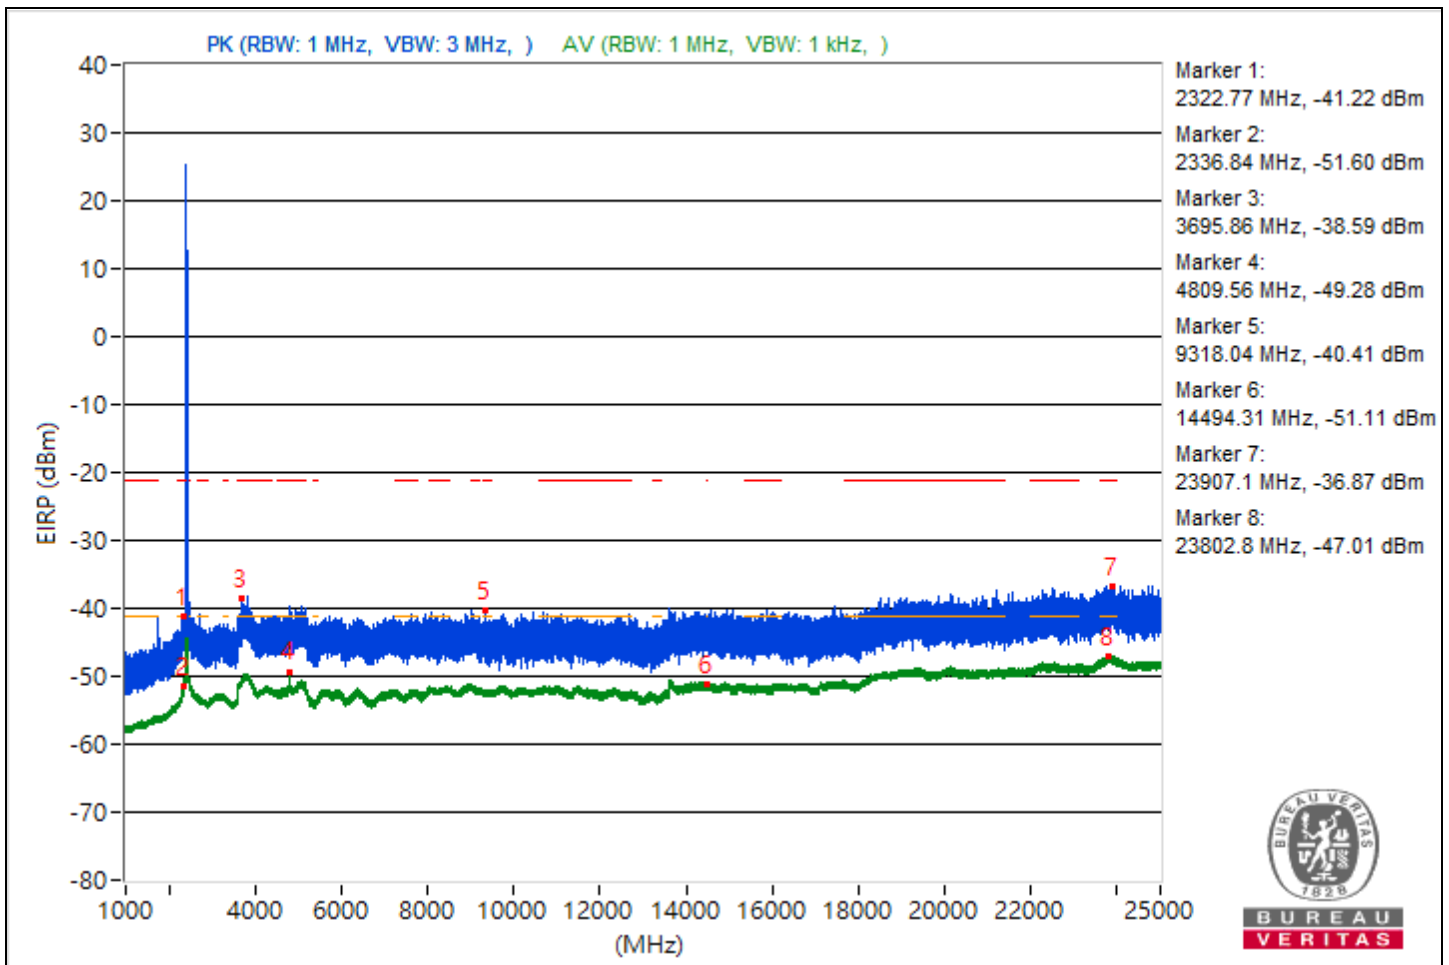

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2317.17	53.2 PK	74	-20.8	-52.2	-48.53	4.92	-42.06
2	2335.91	43.52 AV	54	-10.48	-60.04	-59.32	4.92	-51.74
3	4859.8	56.95 PK	74	-17.05	-46.87	-45.7	4.92	-38.31
4	4859.64	47.06 AV	54	-6.94	-55.89	-56.38	4.92	-48.2
5	9065.51	54.14 PK	74	-19.86	-46.82	-53.88	4.92	-41.12
6	14476.98	44.27 AV	54	-9.73	-58.58	-59.29	4.92	-50.99
7	23811.7	58.55 PK	74	-15.45	-42.86	-47.72	4.92	-36.71
8	23817.9	48.5 AV	54	-5.5	-55.03	-54.37	4.92	-46.76


Note: Margin value = Emission Level - Limit value

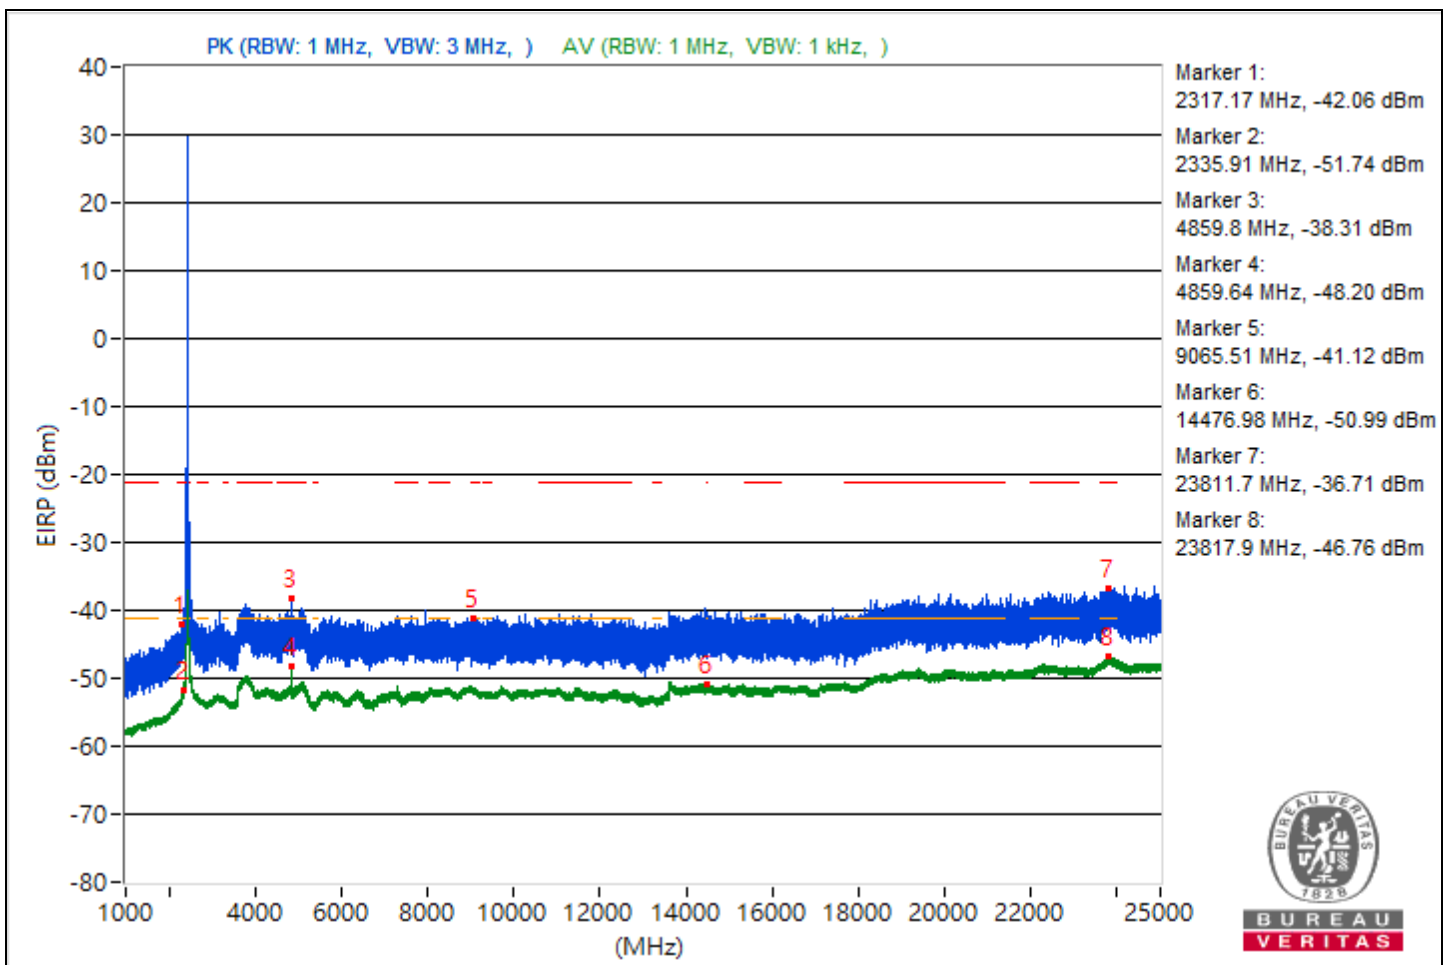

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2337.47	53.15 PK	74	-20.85	-52.86	-48.35	4.92	-42.11
2	2339.96	42.96 AV	54	-11.04	-60.54	-59.93	4.92	-52.3
3	4998.09	55.69 PK	74	-18.31	-51.48	-45.46	4.92	-39.57
4	3799.53	45.49 AV	54	-8.51	-58.01	-57.4	4.92	-49.77
5	14478.4	54.6 PK	74	-19.4	-47.04	-51.04	4.92	-40.66
6	14498.13	44.1 AV	54	-9.9	-58.67	-59.55	4.92	-51.16
7	23823.2	58.72 PK	74	-15.28	-42.94	-46.85	4.92	-36.54
8	23826.4	48.27 AV	54	-5.73	-54.57	-55.29	4.92	-46.99


Note: Margin value = Emission Level - Limit value

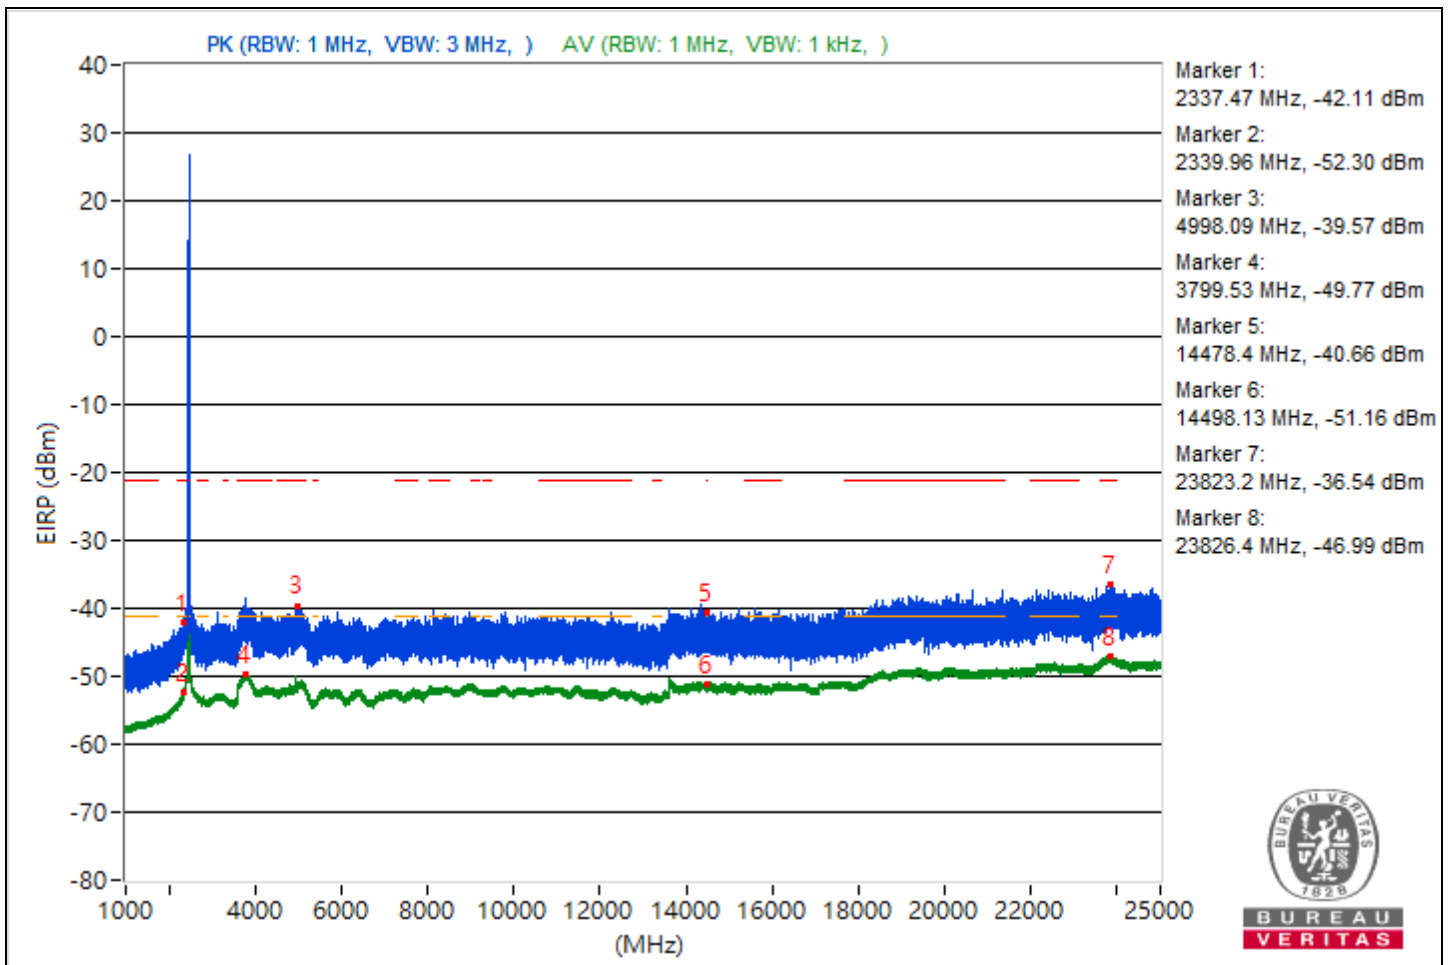

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2314.99	52.63 PK	74	-21.37	-52.58	-49.19	4.92	-42.63
2	2334.59	42.72 AV	54	-11.28	-60.73	-60.23	4.92	-52.54
3	3743.77	56.31 PK	74	-17.69	-49.9	-45.12	4.92	-38.95
4	3811.28	45.6 AV	54	-8.4	-57.76	-57.44	4.92	-49.66
5	8253.69	55.1 PK	74	-18.9	-45.87	-52.9	4.92	-40.16
6	14473.6	44.18 AV	54	-9.82	-59.57	-58.52	4.92	-51.08
7	23935.2	58.11 PK	74	-15.89	-50.99	-42.66	4.92	-37.15
8	23820.3	48.26 AV	54	-5.74	-55.33	-54.56	4.92	-47


Note: Margin value = Emission Level - Limit value

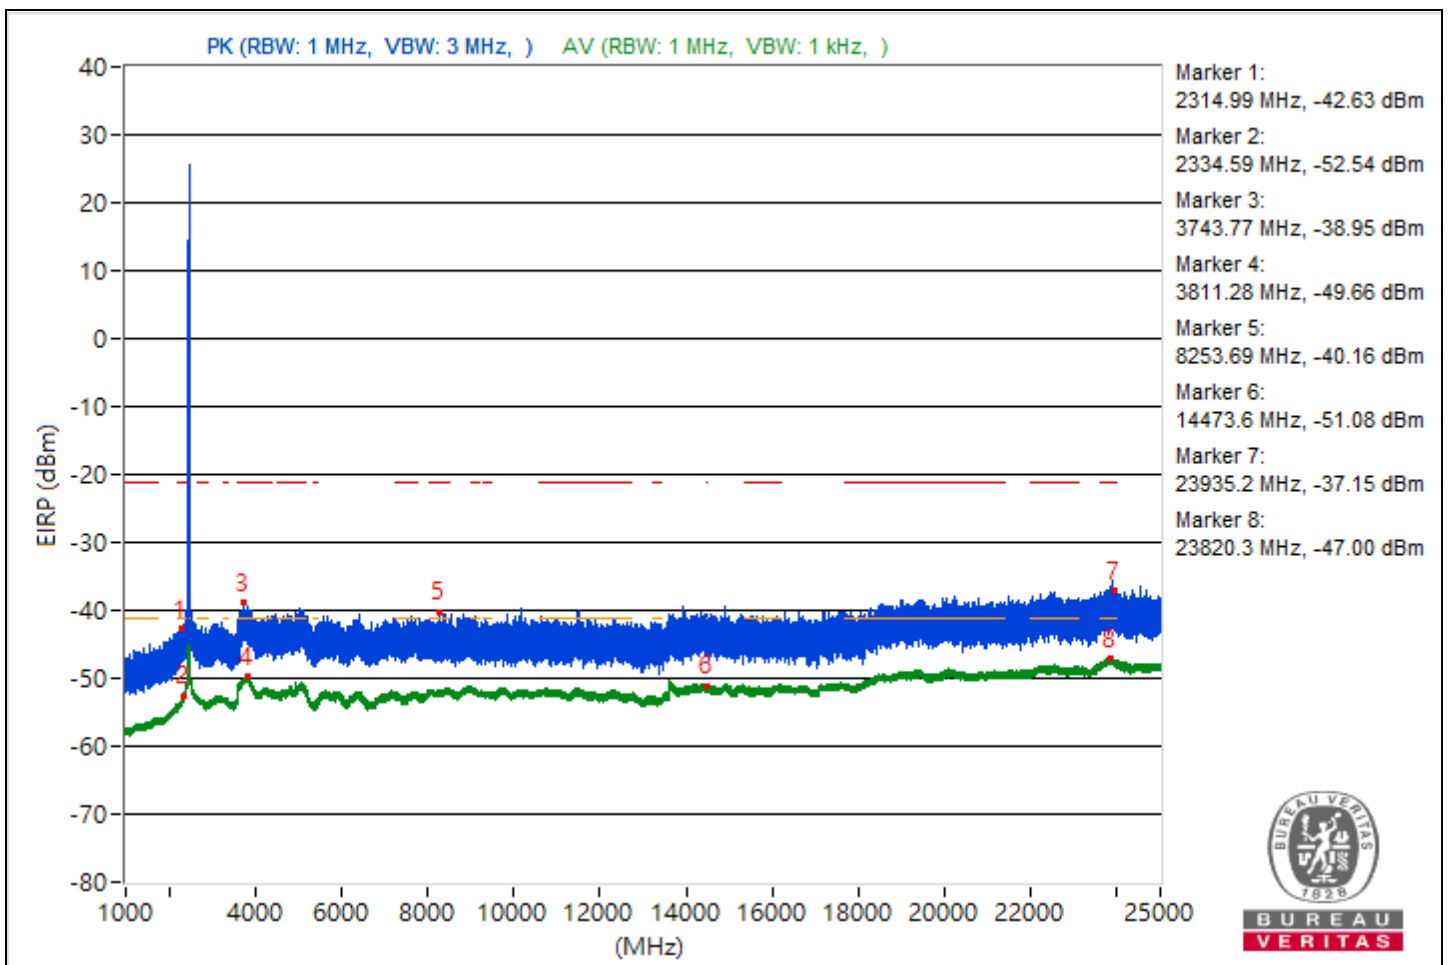

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2239.86	52.44 PK	74	-21.56	-49.62	-52.27	4.92	-42.82
2	2337	42.63 AV	54	-11.37	-60.89	-60.25	4.92	-52.63
3	3804.36	56.42 PK	74	-17.58	-45.78	-48.05	4.92	-38.84
4	3789.34	45.65 AV	54	-8.35	-57.21	-57.9	4.92	-49.61
5	9041.07	55.63 PK	74	-18.37	-49.48	-46.23	4.92	-39.63
6	14499.73	44.11 AV	54	-9.89	-58.91	-59.26	4.92	-51.15
7	23846.2	58.58 PK	74	-15.42	-42.96	-47.3	4.92	-36.68
8	23800	48.35 AV	54	-5.65	-54.61	-55.1	4.92	-46.91


Note: Margin value = Emission Level - Limit value

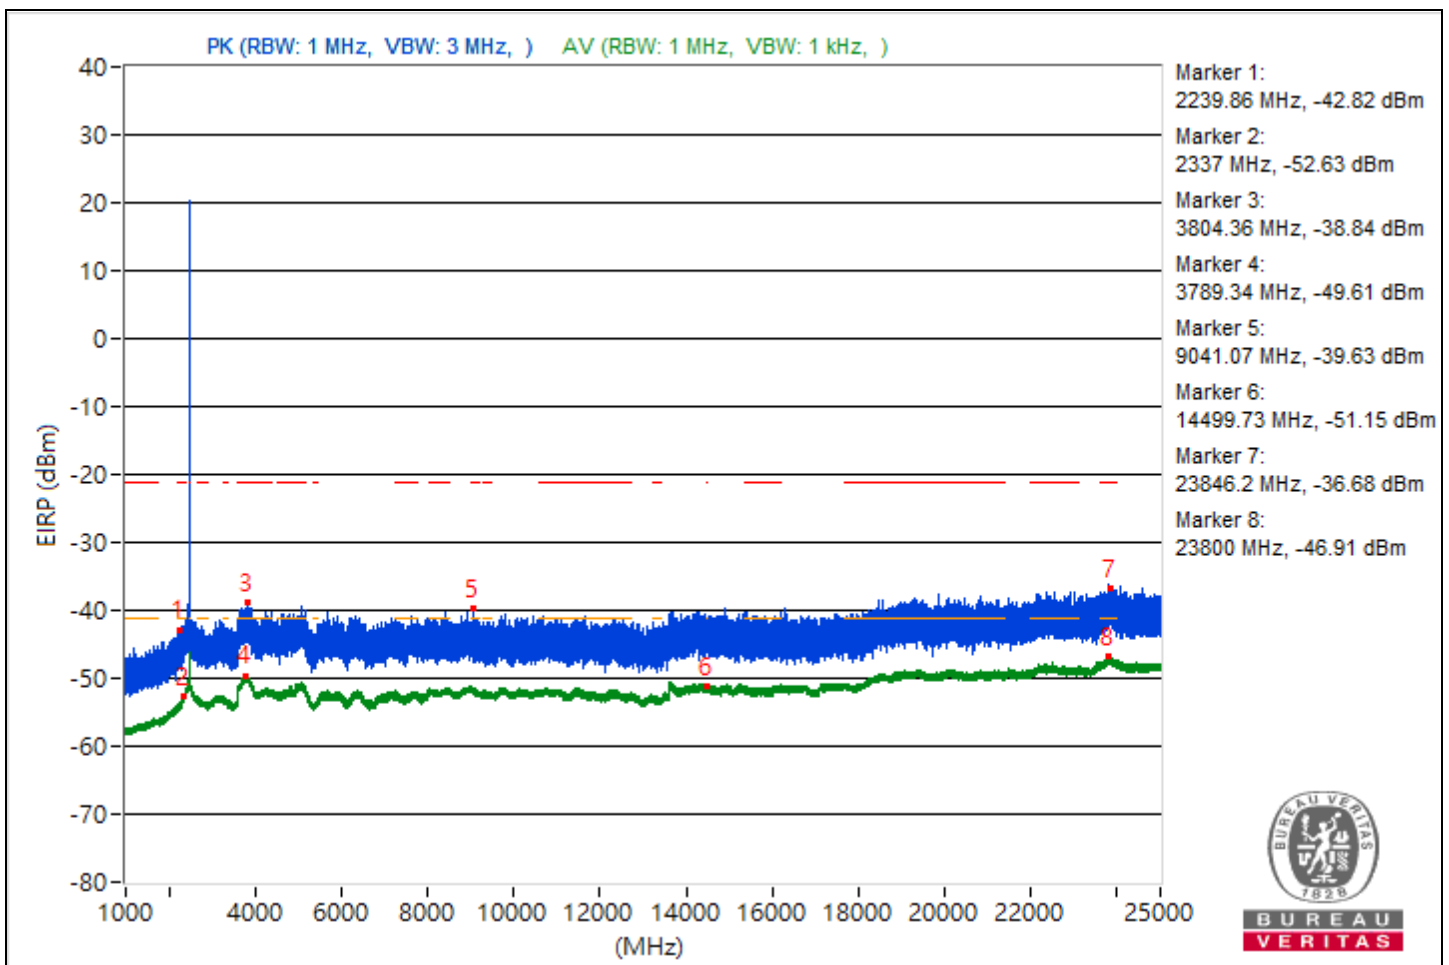

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2333.66	54.13 PK	74	-19.87	-47.22	-52.34	4.92	-41.13
2	2338.56	43.87 AV	54	-10.13	-59.55	-59.1	4.92	-51.39
3	3732.49	55.69 PK	74	-18.31	-50.68	-45.69	4.92	-39.57
4	3791.6	45.34 AV	54	-8.66	-58.32	-57.43	4.92	-49.92
5	10903.29	54.96 PK	74	-19.04	-52.01	-46.24	4.92	-40.3
6	14470.76	44 AV	54	-10	-59.74	-58.71	4.92	-51.26
7	23814.3	58.92 PK	74	-15.08	-42.89	-46.29	4.92	-36.34
8	23838.7	48.42 AV	54	-5.58	-54.33	-55.26	4.92	-46.84


Note: Margin value = Emission Level - Limit value

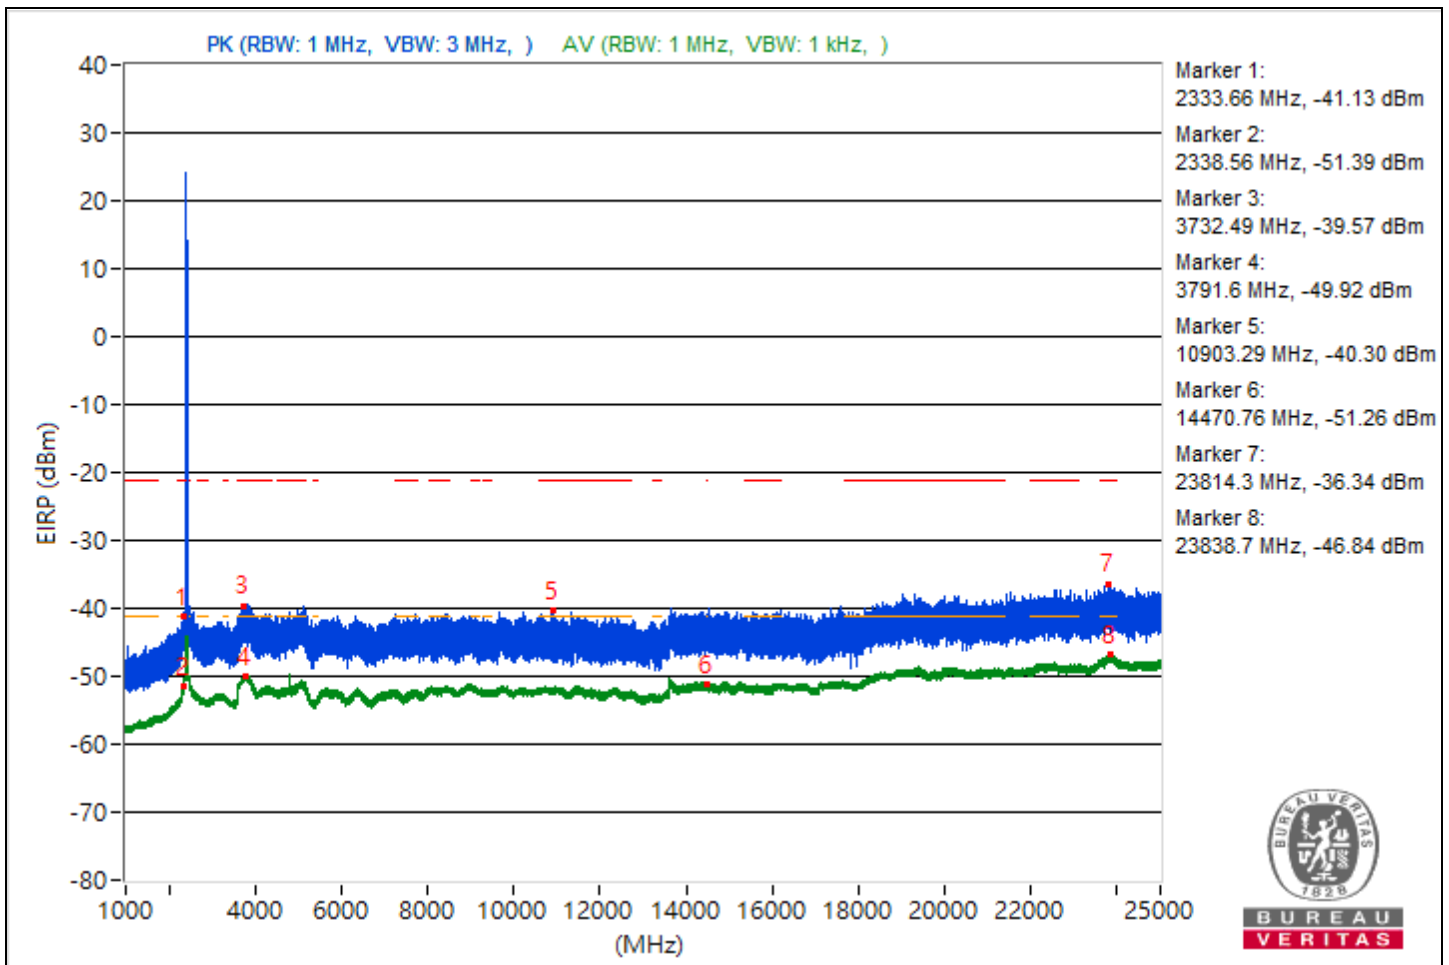

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.12	53.16 PK	74	-20.84	-51.97	-48.7	4.92	-42.1
2	2339.26	43.53 AV	54	-10.47	-60.29	-59.11	4.92	-51.73
3	3744.54	56.38 PK	74	-17.62	-48.55	-45.57	4.92	-38.88
4	4864.16	45.55 AV	54	-8.45	-57.47	-57.82	4.92	-49.71
5	15914.31	54.76 PK	74	-19.24	-46.18	-53.39	4.92	-40.5
6	14485.78	44.16 AV	54	-9.84	-58.8	-59.28	4.92	-51.1
7	23652.7	59.09 PK	74	-14.91	-48.82	-41.89	4.92	-36.17
8	23792.1	48.23 AV	54	-5.77	-55.62	-54.39	4.92	-47.03

Note: Margin value = Emission Level - Limit value

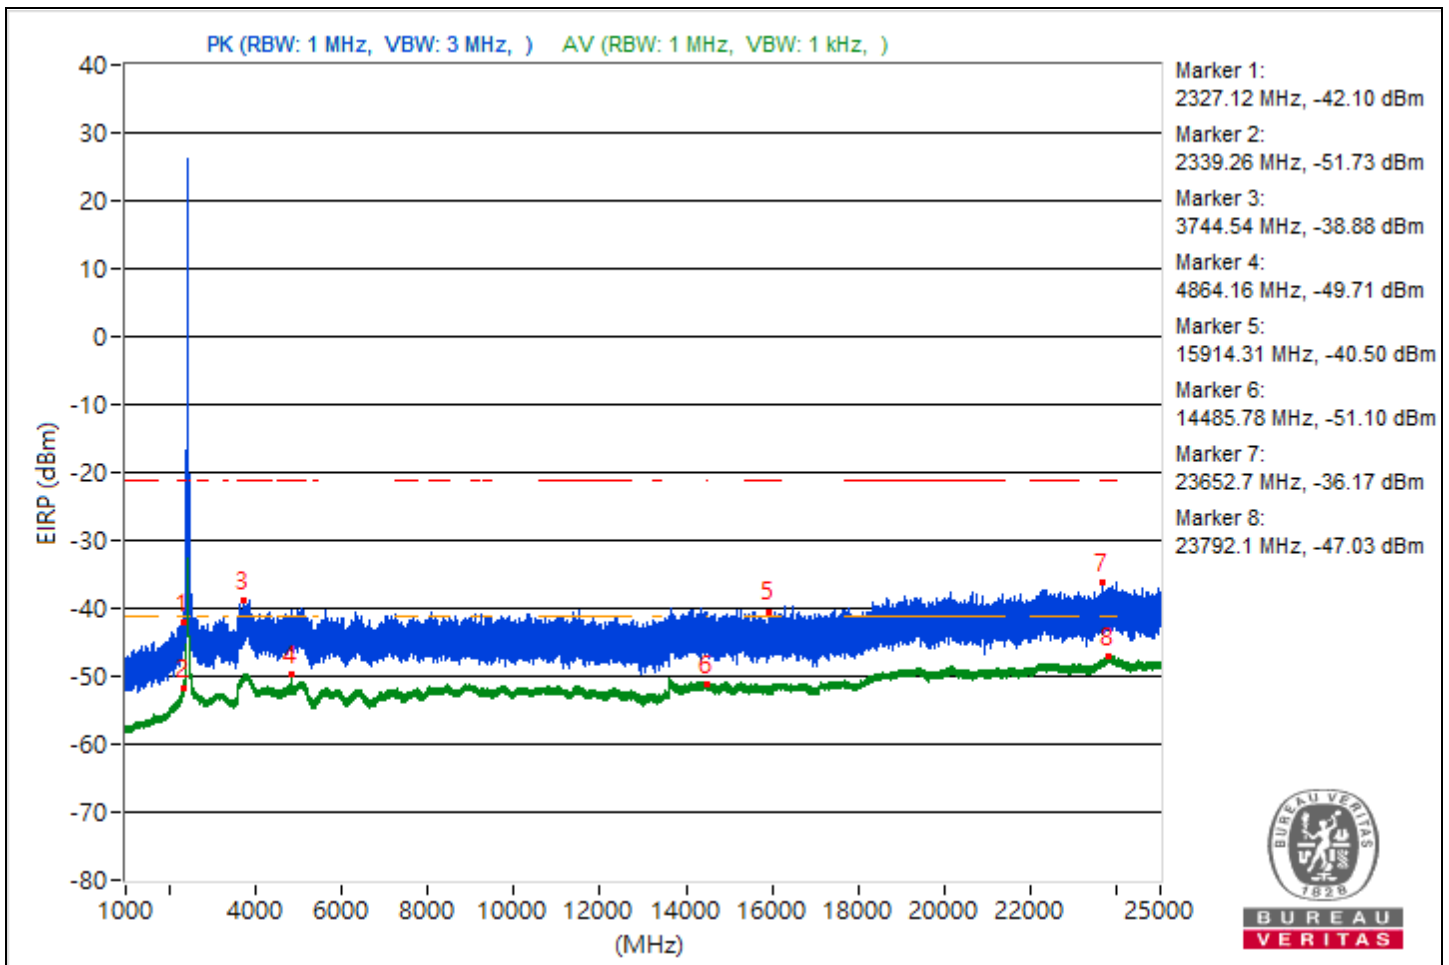




RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2325.8	53.11 PK	74	-20.89	-49.56	-50.67	4.92	-42.15
2	2338.56	42.97 AV	54	-11.03	-60.37	-60.08	4.92	-52.29
3	3756.44	56.1 PK	74	-17.9	-45.89	-48.76	4.92	-39.16
4	3784.91	45.4 AV	54	-8.6	-57.48	-58.12	4.92	-49.86
5	14480	54.81 PK	74	-19.19	-51.43	-46.61	4.92	-40.45
6	14471.47	44.19 AV	54	-9.81	-58.63	-59.39	4.92	-51.07
7	23909.7	58.47 PK	74	-15.53	-47.53	-43.02	4.92	-36.79
8	23791.4	48.39 AV	54	-5.61	-55.19	-54.44	4.92	-46.87


Note: Margin value = Emission Level - Limit value

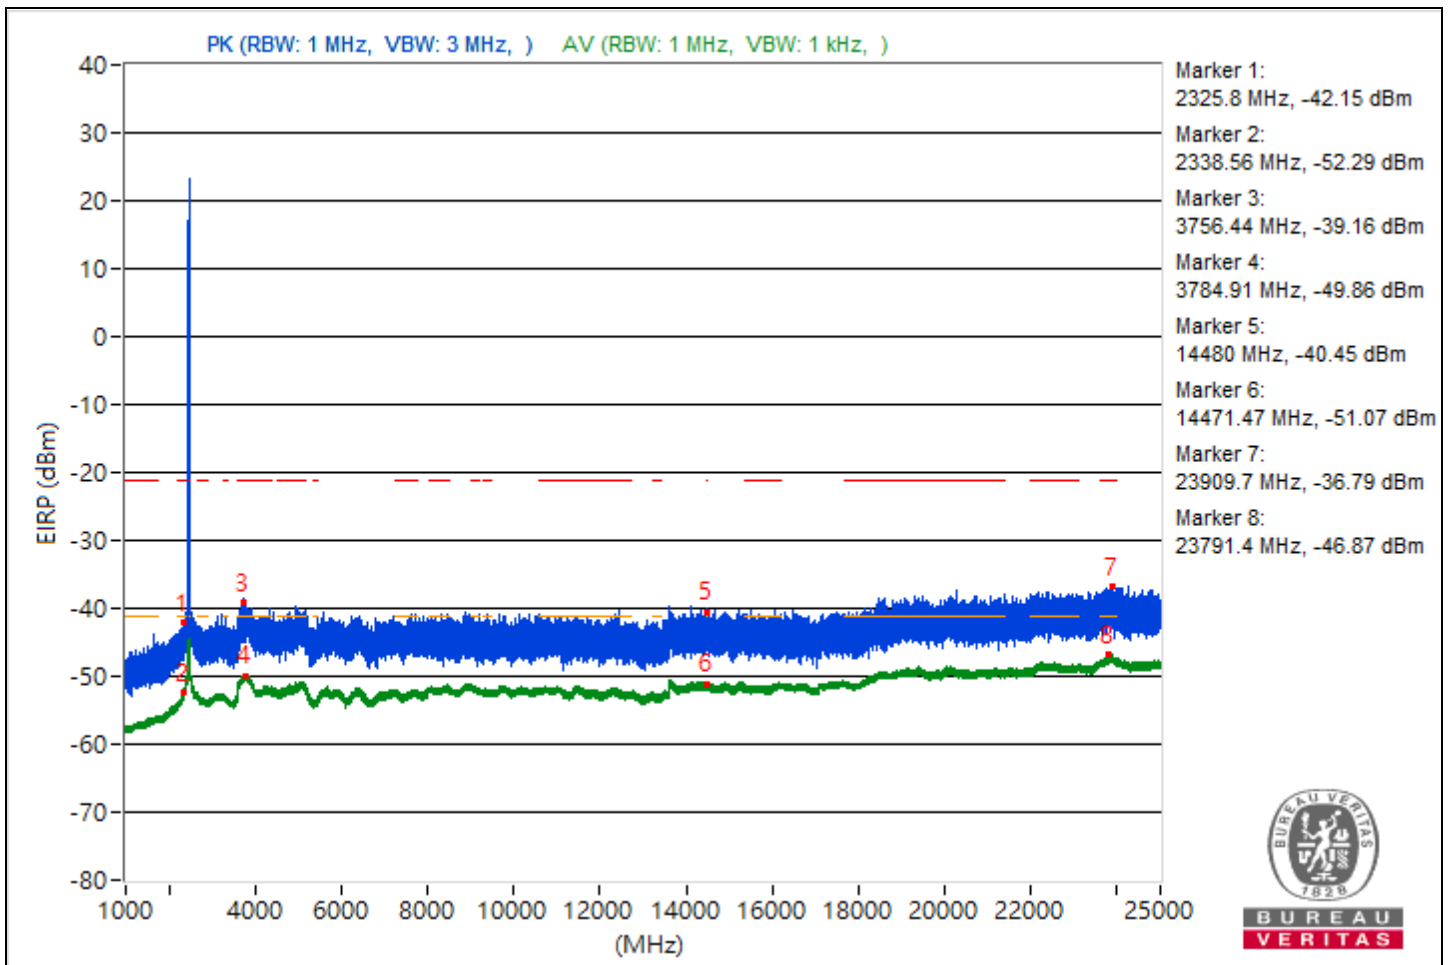

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2327.67	52.48 PK	74	-21.52	-53.51	-49.03	4.92	-42.78
2	2335.29	43.03 AV	54	-10.97	-60.1	-60.21	4.92	-52.23
3	3782.19	55.92 PK	74	-18.08	-49.49	-45.81	4.92	-39.34
4	3822.17	45.45 AV	54	-8.55	-57.96	-57.53	4.92	-49.81
5	8206.84	54.86 PK	74	-19.14	-51.66	-46.47	4.92	-40.4
6	14491.47	44.37 AV	54	-9.63	-59.09	-58.58	4.92	-50.89
7	23838.6	59.8 PK	74	-14.2	-46.62	-41.56	4.92	-35.46
8	23807.8	48.32 AV	54	-5.68	-54.67	-55.08	4.92	-46.94


Note: Margin value = Emission Level - Limit value

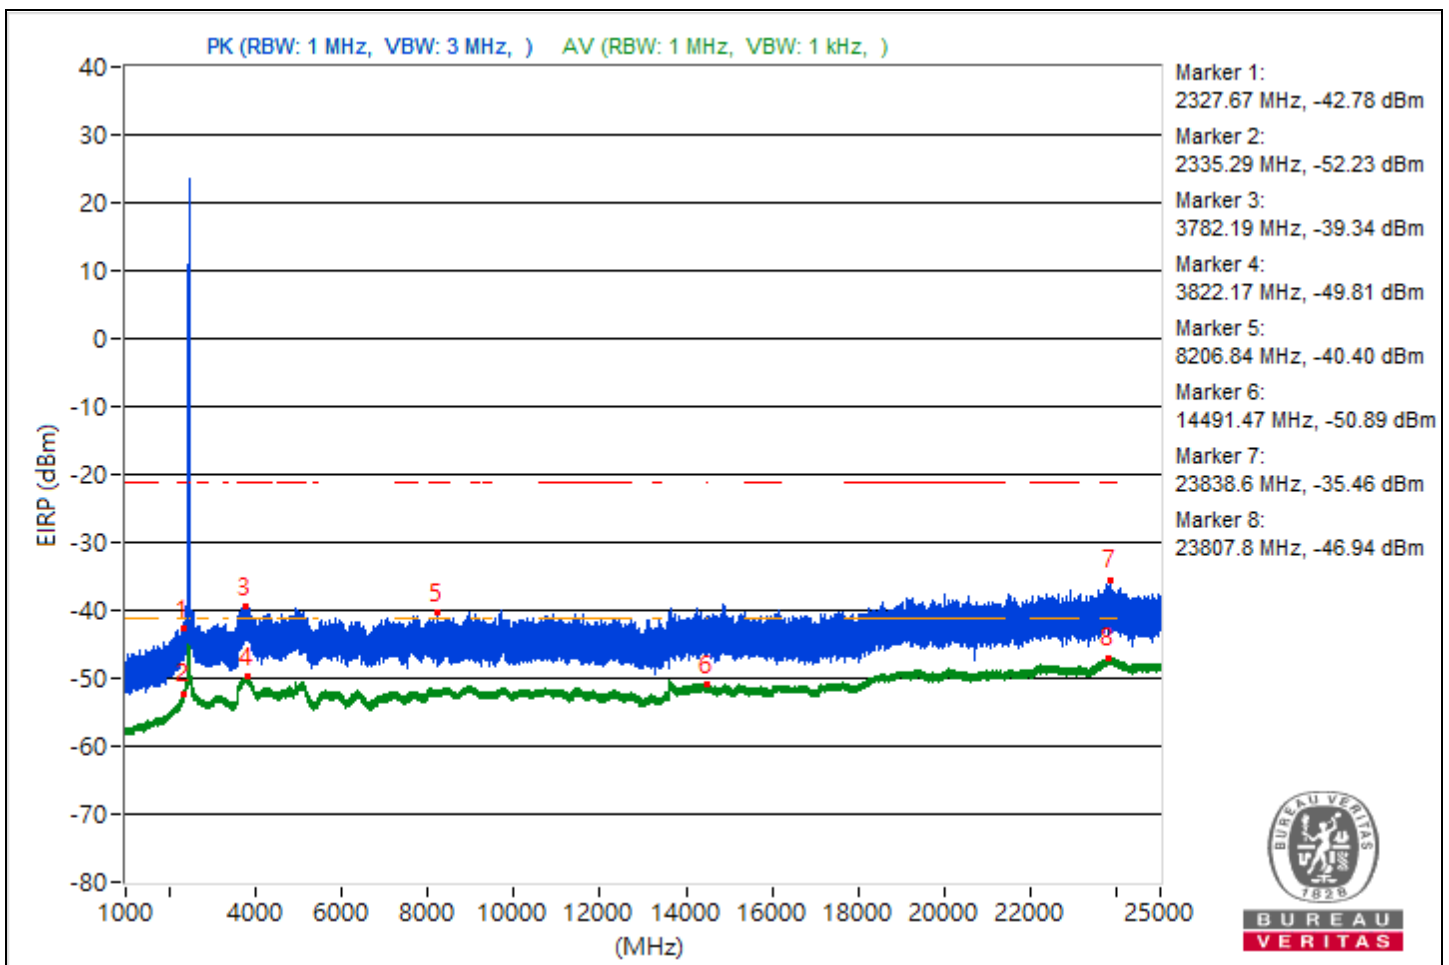

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2315.61	52.71 PK	74	-21.29	-48.49	-54.27	4.92	-42.55
2	2335.21	42.43 AV	54	-11.57	-60.47	-61.08	4.92	-52.83
3	5037.21	56.04 PK	74	-17.96	-49.95	-45.46	4.92	-39.22
4	3807.78	45.39 AV	54	-8.61	-57.47	-58.15	4.92	-49.87
5	14488.8	54.74 PK	74	-19.26	-50.07	-47.27	4.92	-40.52
6	14493.78	44.22 AV	54	-9.78	-58.85	-59.09	4.92	-51.04
7	23789.9	58.9 PK	74	-15.1	-42.67	-46.91	4.92	-36.36
8	23782.4	48.34 AV	54	-5.66	-54.59	-55.12	4.92	-46.92


Note: Margin value = Emission Level - Limit value

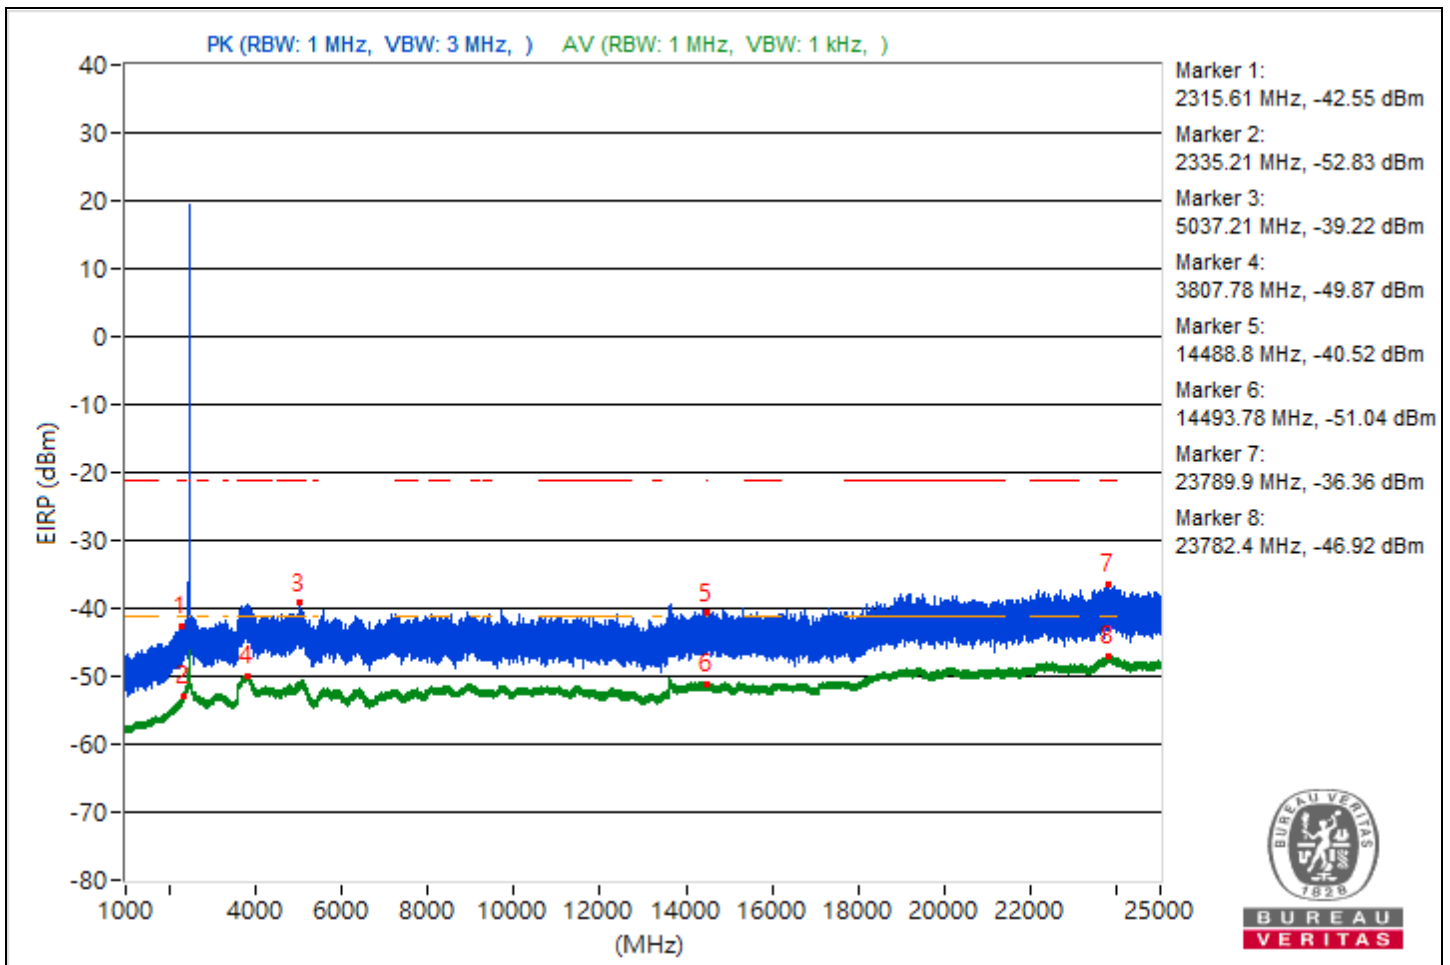

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2336.84	53.41 PK	74	-20.59	-50.18	-49.41	4.92	-41.85
2	2339.1	43.64 AV	54	-10.36	-59.79	-59.33	4.92	-51.62
3	3738.87	56.73 PK	74	-17.27	-50.72	-44.35	4.92	-38.53
4	4815.16	45.71 AV	54	-8.29	-57.32	-57.65	4.92	-49.55
5	11546.13	54.36 PK	74	-19.64	-46.86	-52.57	4.92	-40.9
6	9051.91	43.95 AV	54	-10.05	-59.85	-58.71	4.92	-51.31
7	23875	58.45 PK	74	-15.55	-42.98	-47.75	4.92	-36.81
8	23850.7	48.43 AV	54	-5.57	-54.53	-55.01	4.92	-46.83

Note: Margin value = Emission Level - Limit value

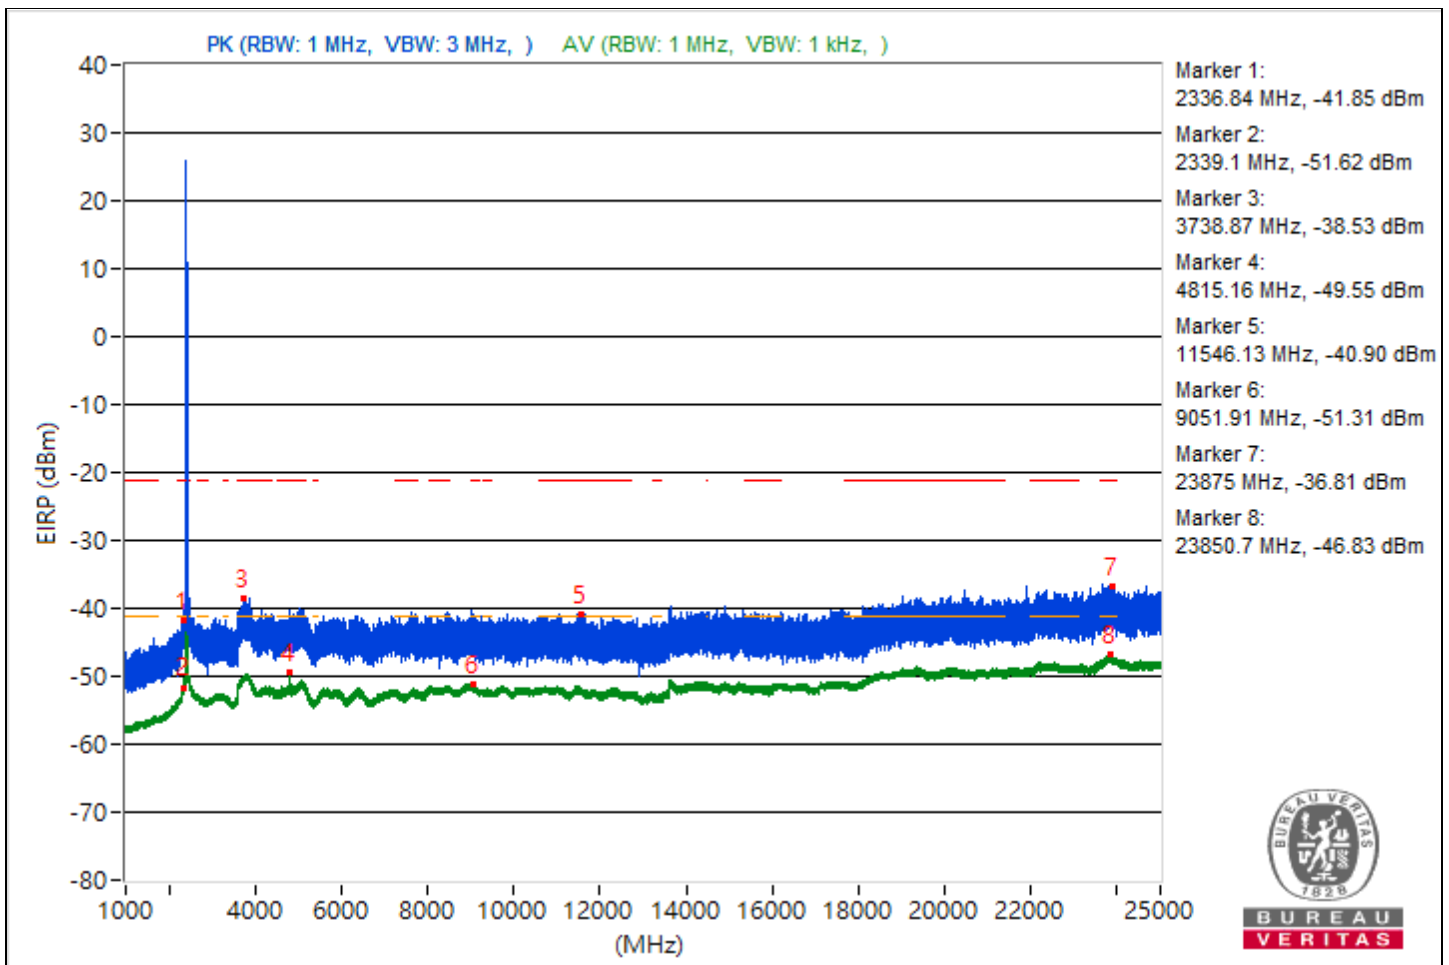




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2339.57	54.79 PK	74	-19.21	-47.53	-49.49	4.92	-40.47
2	2333.11	43.54 AV	54	-10.46	-59.39	-59.92	4.92	-51.72
3	3842.62	56.58 PK	74	-17.42	-49.21	-44.99	4.92	-38.68
4	4866.02	45.96 AV	54	-8.04	-57.39	-57.08	4.92	-49.3
5	15839.64	55.3 PK	74	-18.7	-46.19	-50.72	4.92	-39.96
6	14473.07	44.16 AV	54	-9.84	-59.43	-58.66	4.92	-51.1
7	23809	58.34 PK	74	-15.66	-49.12	-42.74	4.92	-36.92
8	23844	48.33 AV	54	-5.67	-55.16	-54.57	4.92	-46.93


Note: Margin value = Emission Level - Limit value

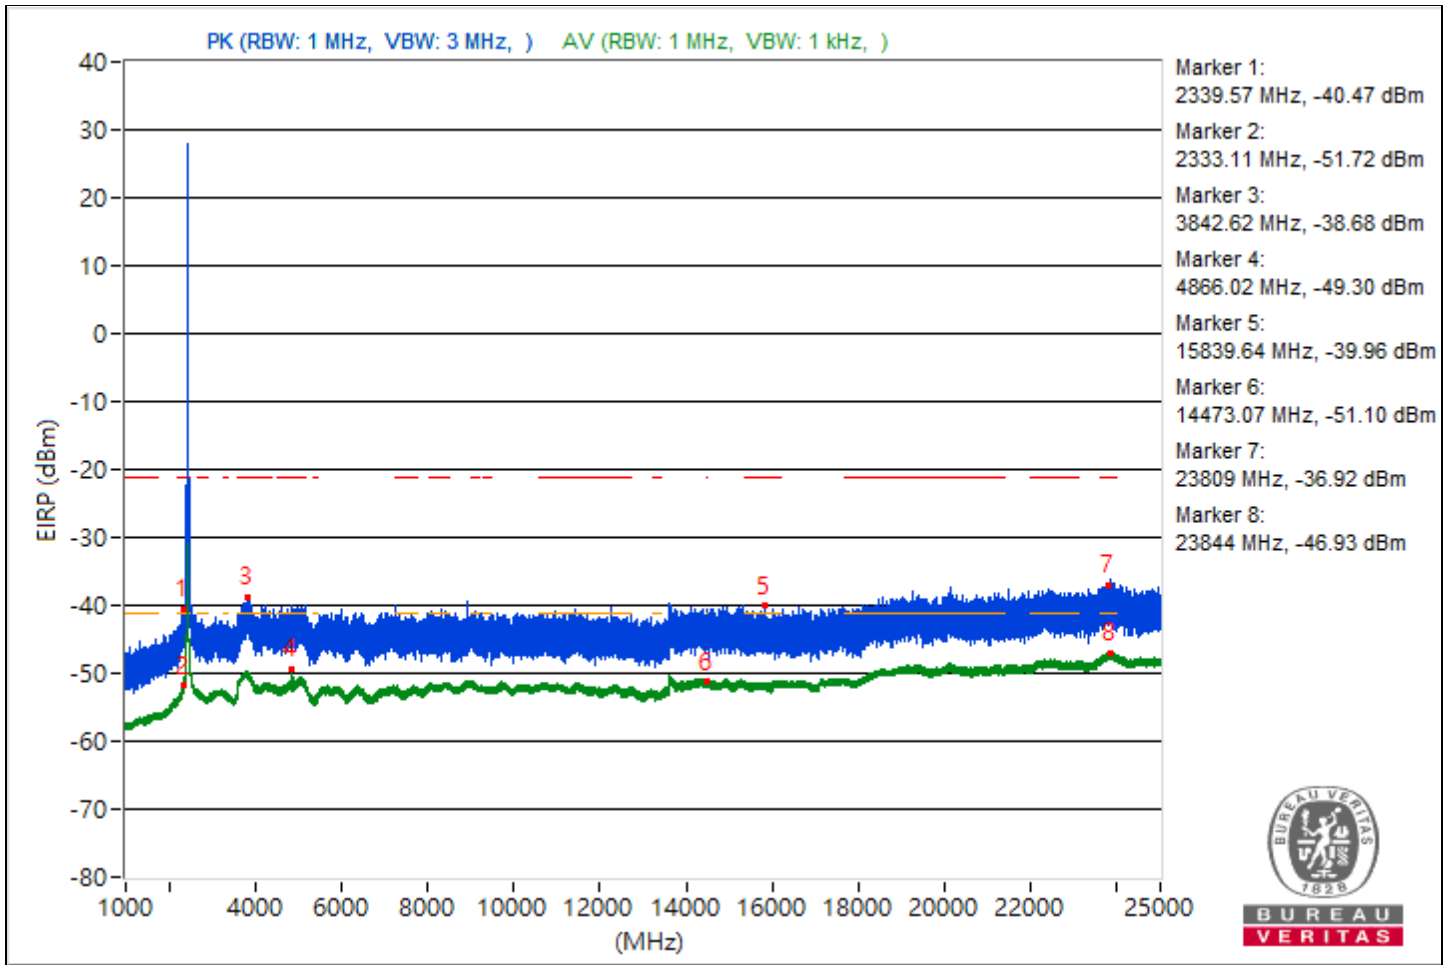

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2256.73	52.79 PK	74	-21.21	-49.26	-51.95	4.92	-42.47
2	2339.49	43.11 AV	54	-10.89	-60.25	-59.91	4.92	-52.15
3	3802.57	55.66 PK	74	-18.34	-45.8	-50.44	4.92	-39.6
4	3795.41	45.53 AV	54	-8.47	-57.51	-57.81	4.92	-49.73
5	15489.24	54.73 PK	74	-19.27	-52.05	-46.52	4.92	-40.53
6	14494.13	44.08 AV	54	-9.92	-58.83	-59.4	4.92	-51.18
7	23707.5	58.63 PK	74	-15.37	-43.04	-46.91	4.92	-36.63
8	23786.7	48.33 AV	54	-5.67	-54.54	-55.21	4.92	-46.93


Note: Margin value = Emission Level - Limit value

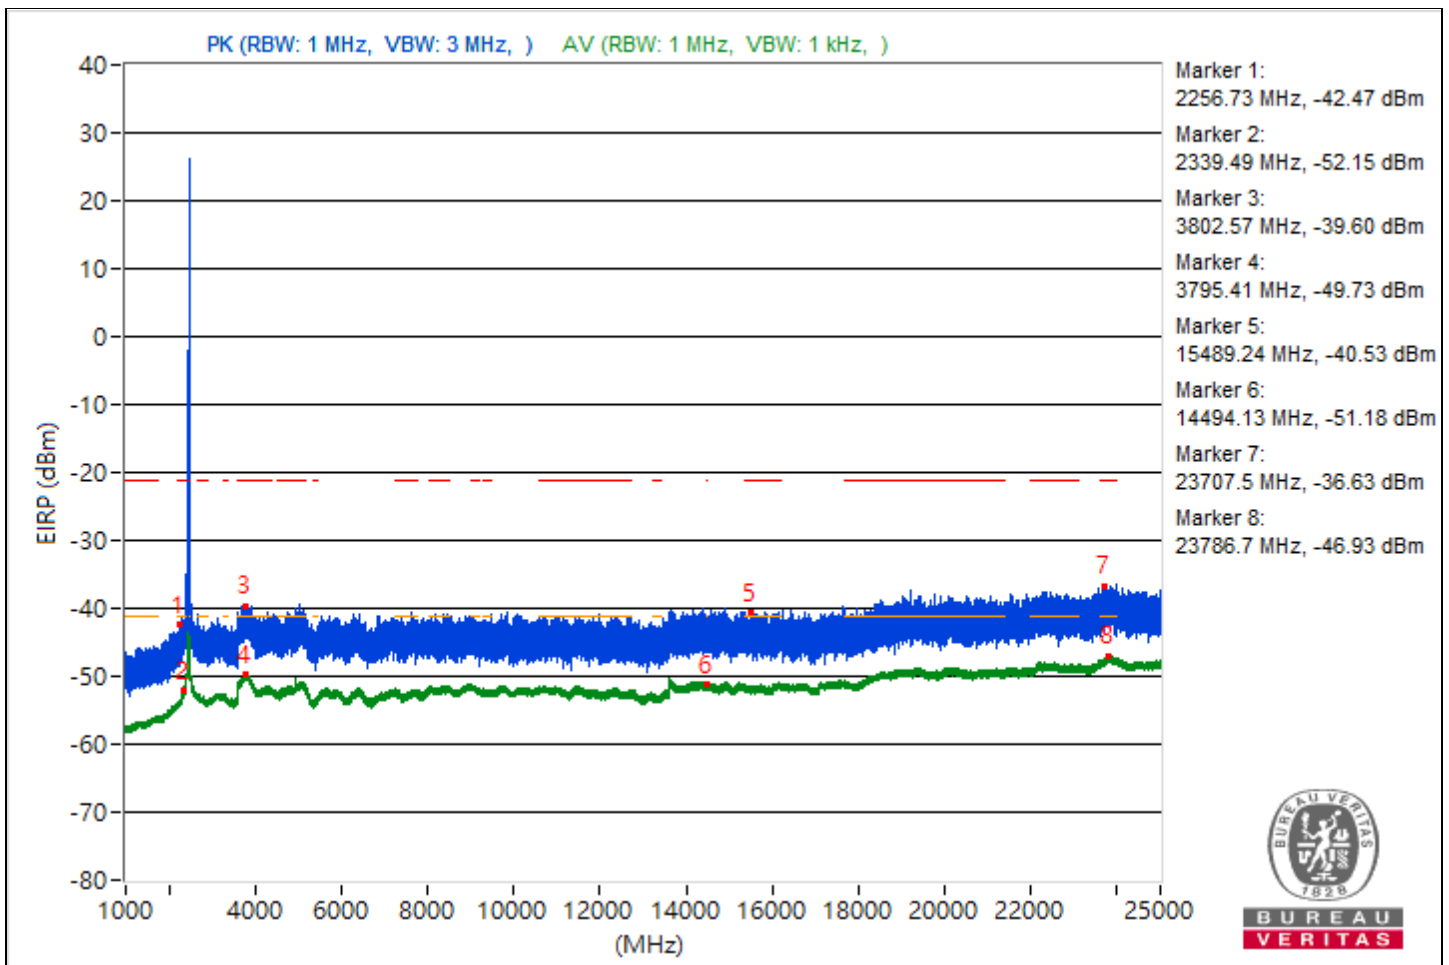

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2255.1	53.43 PK	74	-20.57	-48.33	-51.92	4.92	-41.83
2	2338.17	42.77 AV	54	-11.23	-60.74	-60.13	4.92	-52.49
3	3827.07	55.73 PK	74	-18.27	-45.69	-50.51	4.92	-39.53
4	3808.63	45.58 AV	54	-8.42	-57.8	-57.44	4.92	-49.68
5	10678.76	54.79 PK	74	-19.21	-46.24	-52.89	4.92	-40.47
6	14486.13	44.11 AV	54	-9.89	-59.31	-58.87	4.92	-51.15
7	23775.8	58.22 PK	74	-15.78	-49.81	-42.73	4.92	-37.04
8	23852.8	48.28 AV	54	-5.72	-54.46	-55.42	4.92	-46.98


Note: Margin value = Emission Level - Limit value

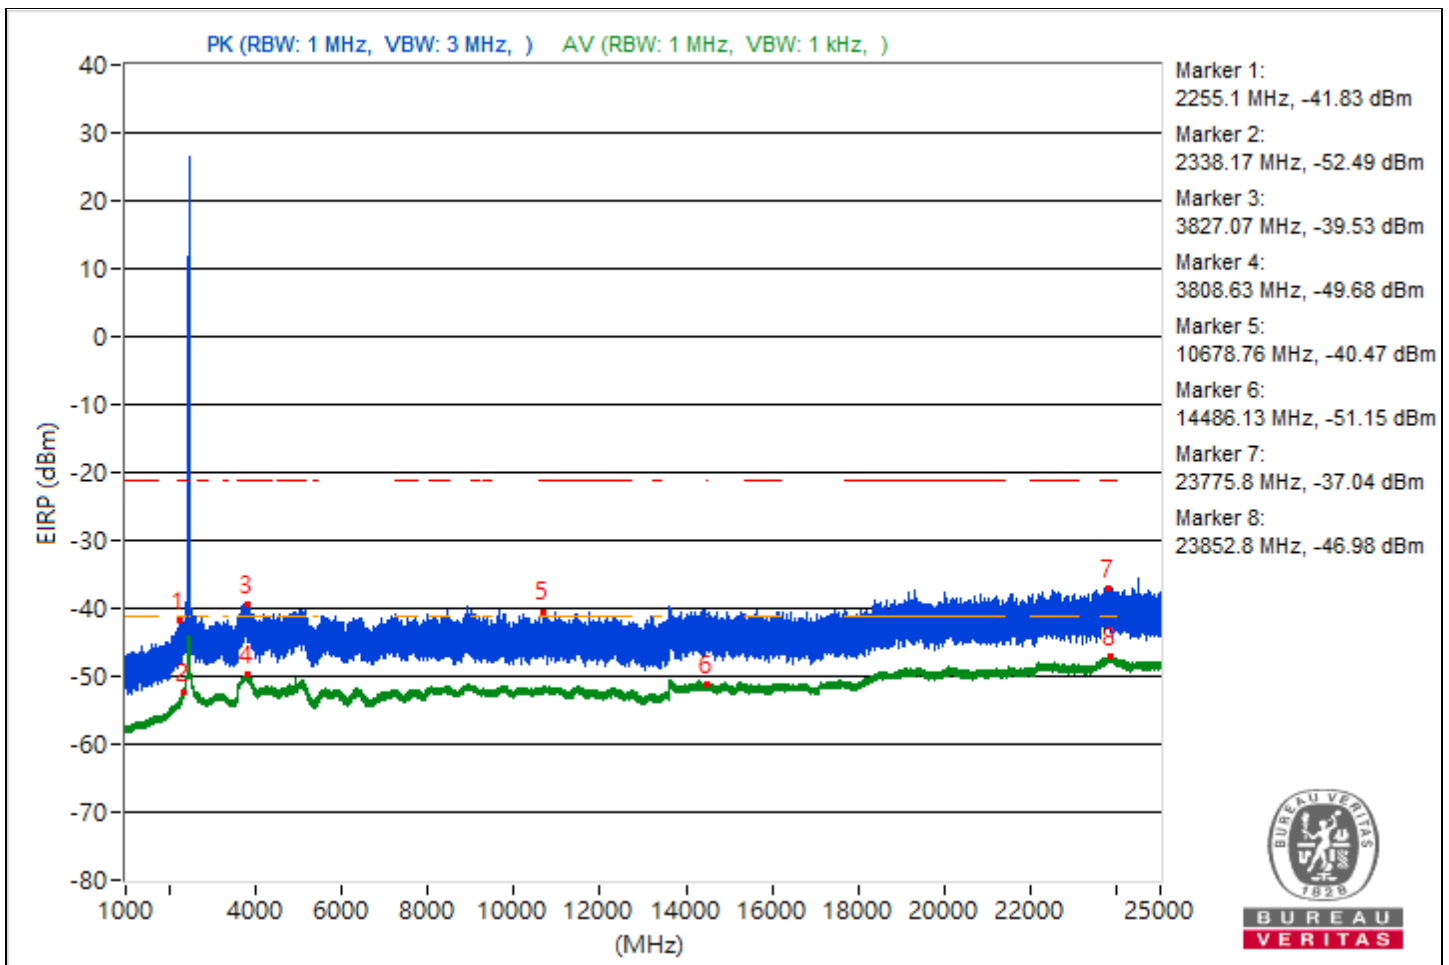

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2311.64	52.54 PK	74	-21.46	-52.77	-49.23	4.92	-42.72
2	2336.92	42.75 AV	54	-11.25	-60.44	-60.44	4.92	-52.51
3	3828.23	55.63 PK	74	-18.37	-46.1	-49.8	4.92	-39.63
4	3785.3	45.45 AV	54	-8.55	-57.46	-58.05	4.92	-49.81
5	15629.33	55.38 PK	74	-18.62	-45.78	-51.74	4.92	-39.88
6	14472.62	44.21 AV	54	-9.79	-59.32	-58.66	4.92	-51.05
7	23805.9	58.72 PK	74	-15.28	-43.65	-45.49	4.92	-36.54
8	23804	48.21 AV	54	-5.79	-54.57	-55.44	4.92	-47.05

Note: Margin value = Emission Level - Limit value

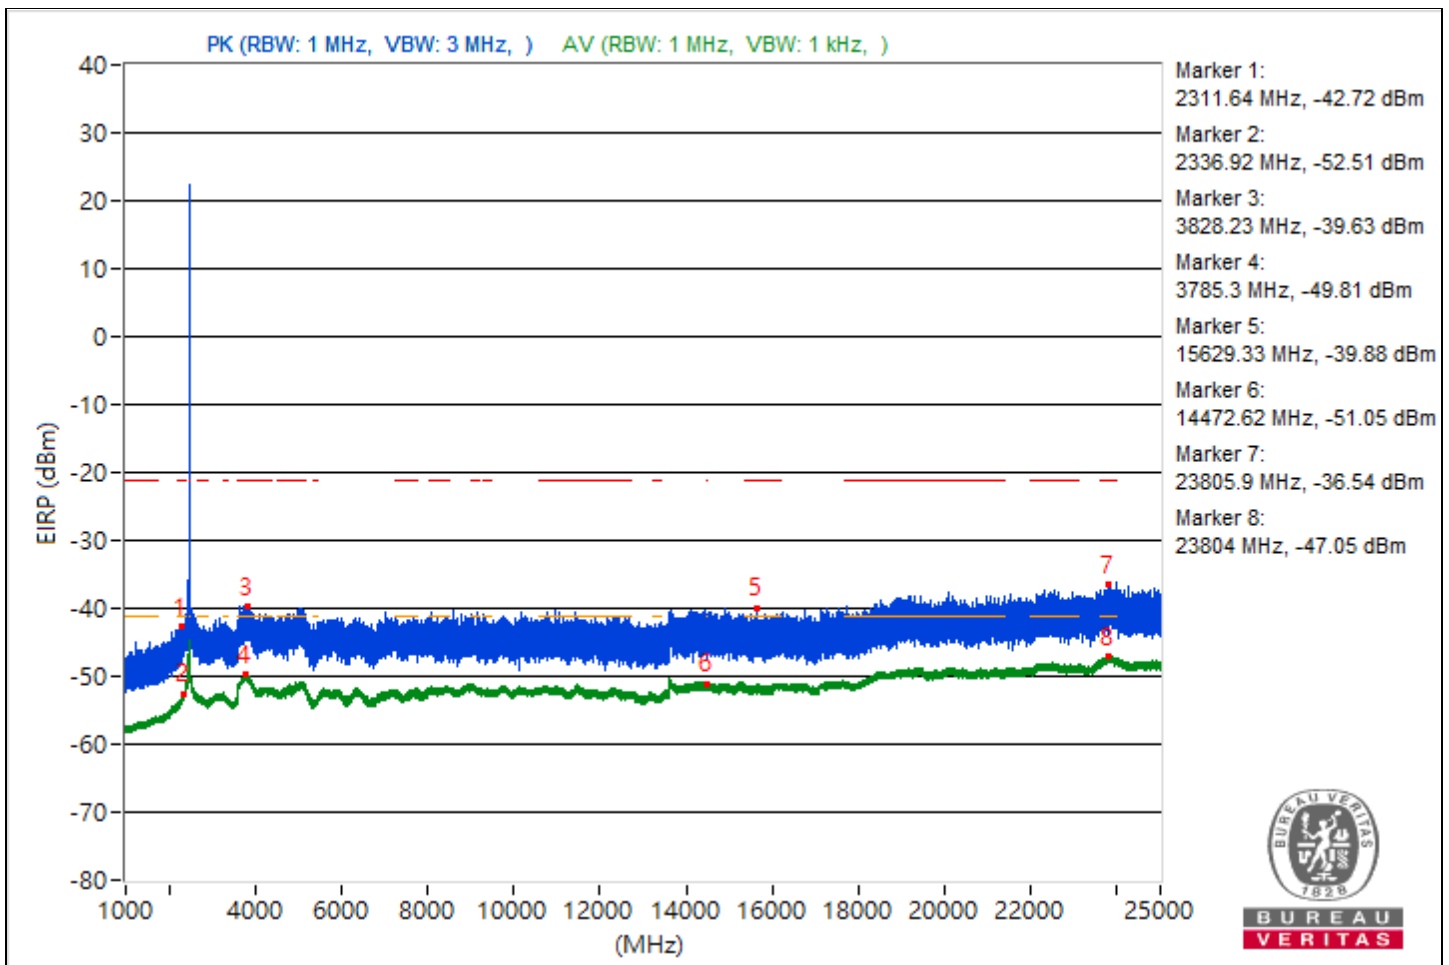




RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2330	53.35 PK	74	-20.65	-47.99	-53.13	4.92	-41.91
2	2339.33	43.61 AV	54	-10.39	-59.9	-59.28	4.92	-51.65
3	3753.88	55.47 PK	74	-18.53	-45.84	-51.12	4.92	-39.79
4	3827.22	45.42 AV	54	-8.58	-58.14	-57.44	4.92	-49.84
5	15363.64	55.63 PK	74	-18.37	-45.15	-53.37	4.92	-39.63
6	14478.58	44.15 AV	54	-9.85	-58.73	-59.37	4.92	-51.11
7	23968.2	58.07 PK	74	-15.93	-43.03	-49.32	4.92	-37.19
8	23817.3	48.53 AV	54	-5.47	-54.71	-54.6	4.92	-46.73


Note: Margin value = Emission Level - Limit value

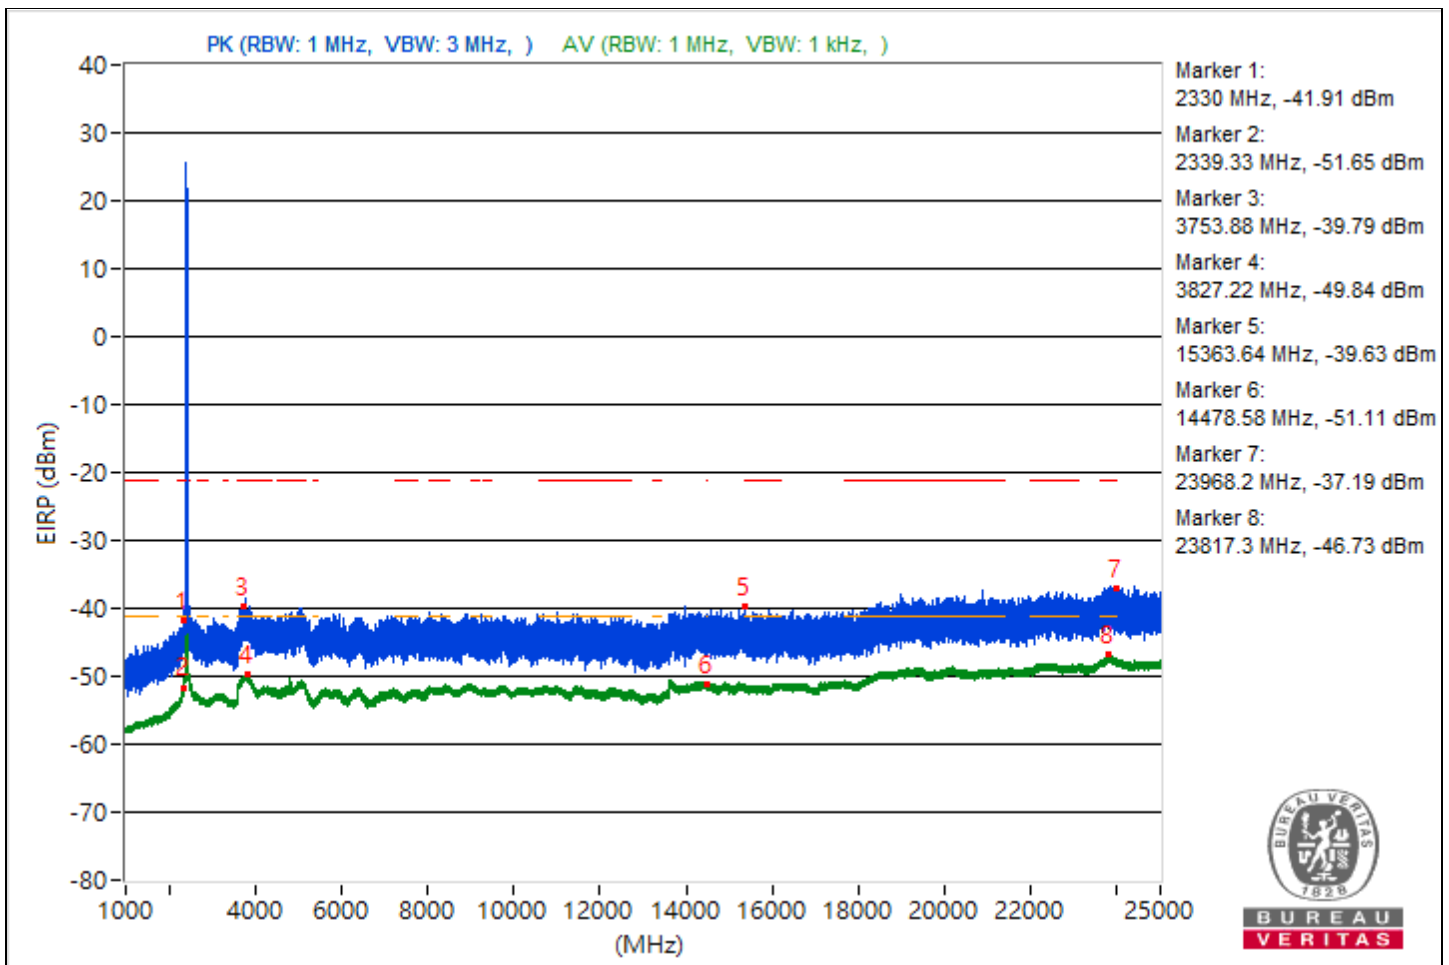

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2330	53.98 PK	74	-20.02	-47.63	-51.72	4.92	-41.28
2	2338.4	43.6 AV	54	-10.4	-59.44	-59.75	4.92	-51.66
3	3716.78	56.53 PK	74	-17.47	-44.94	-49.55	4.92	-38.73
4	3831.73	45.42 AV	54	-8.58	-57.47	-58.08	4.92	-49.84
5	14492.53	55.08 PK	74	-18.92	-46.18	-51.7	4.92	-40.18
6	14483.56	44.24 AV	54	-9.76	-59.32	-58.61	4.92	-51.02
7	23777	59.27 PK	74	-14.73	-43.35	-44.58	4.92	-35.99
8	23813.5	48.31 AV	54	-5.69	-54.65	-55.12	4.92	-46.95


Note: Margin value = Emission Level - Limit value

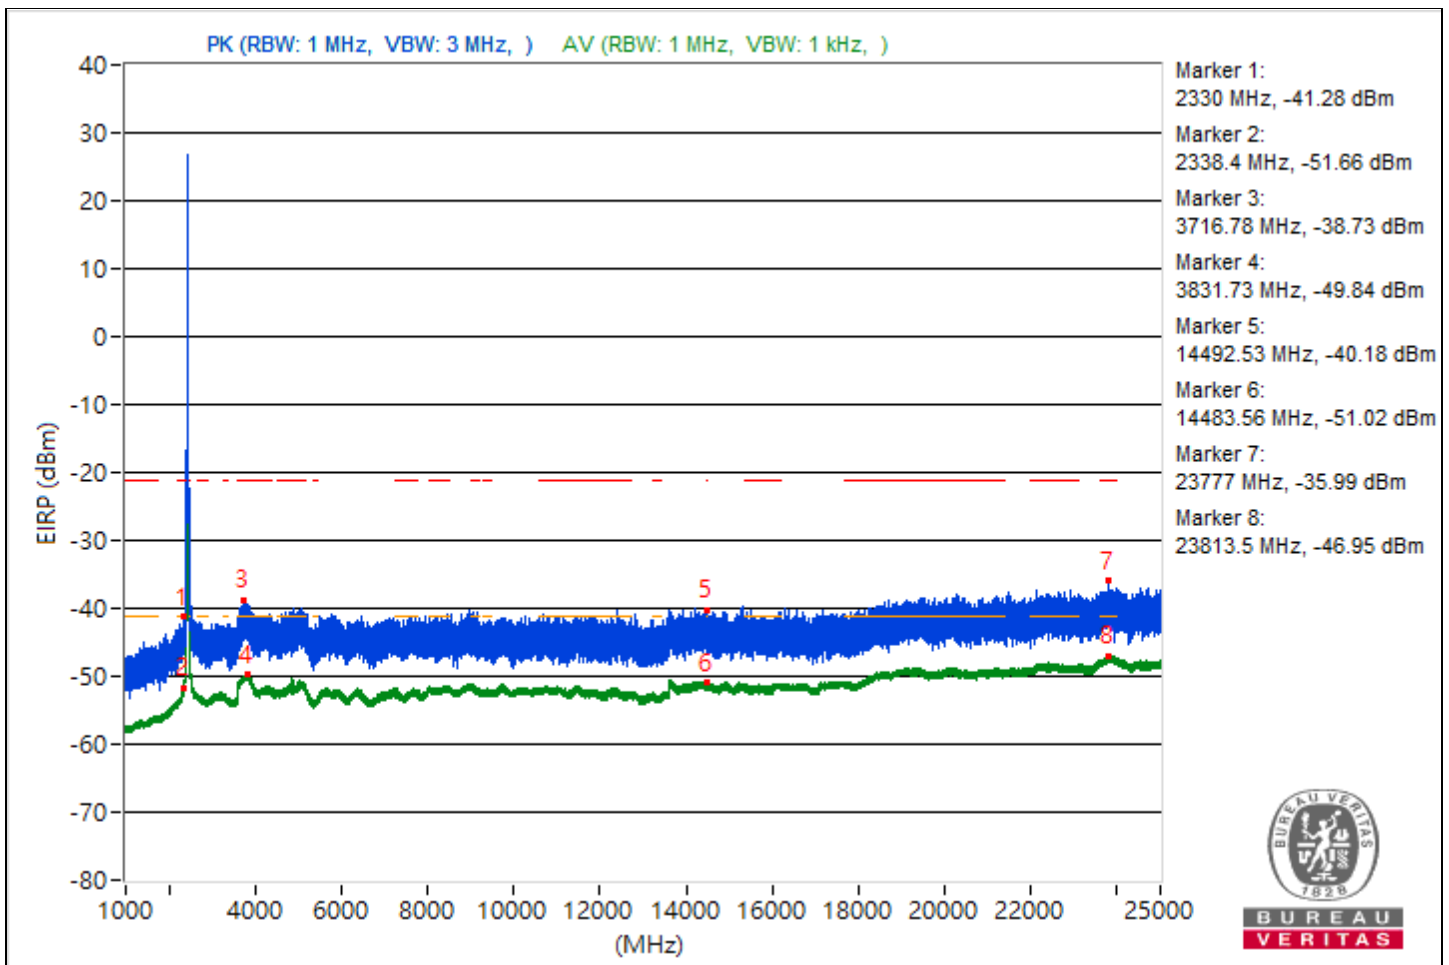

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2338.17	53.15 PK	74	-20.85	-49.38	-50.83	4.92	-42.11
2	2334.59	42.92 AV	54	-11.08	-60.09	-60.45	4.92	-52.34
3	3739.49	55.74 PK	74	-18.26	-50.35	-45.72	4.92	-39.52
4	3807.93	45.46 AV	54	-8.54	-57.43	-58.05	4.92	-49.8
5	15671.11	54.65 PK	74	-19.35	-53.12	-46.36	4.92	-40.61
6	14499.38	44.2 AV	54	-9.8	-58.63	-59.38	4.92	-51.06
7	23865.4	59.55 PK	74	-14.45	-42.43	-45.33	4.92	-35.71
8	23841	48.31 AV	54	-5.69	-54.67	-55.11	4.92	-46.95


Note: Margin value = Emission Level - Limit value

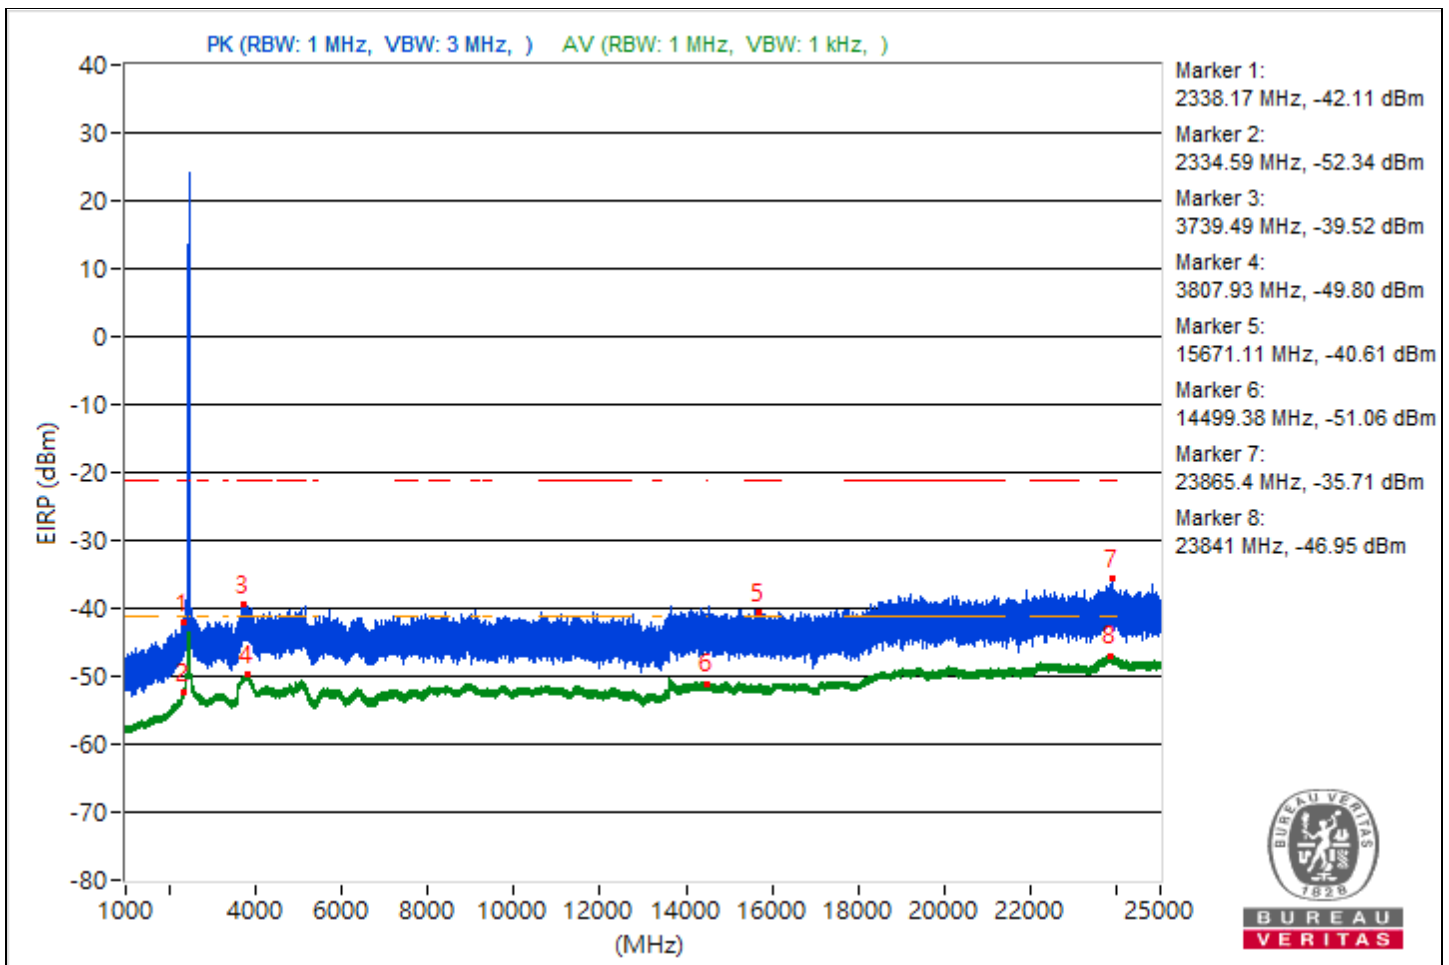

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2335.06	54.24 PK	74	-19.76	-47.28	-51.69	4.92	-41.02
2	2339.72	42.99 AV	54	-11.01	-59.97	-60.44	4.92	-52.27
3	3714.83	56.21 PK	74	-17.79	-49.18	-45.53	4.92	-39.05
4	3814.7	45.49 AV	54	-8.51	-57.97	-57.45	4.92	-49.77
5	8413.33	55.45 PK	74	-18.55	-45.77	-51.43	4.92	-39.81
6	14473.96	44.38 AV	54	-9.62	-58.61	-59.01	4.92	-50.88
7	23882	58.2 PK	74	-15.8	-47.61	-43.36	4.92	-37.06
8	23811.8	48.31 AV	54	-5.69	-55.46	-54.38	4.92	-46.95


Note: Margin value = Emission Level - Limit value

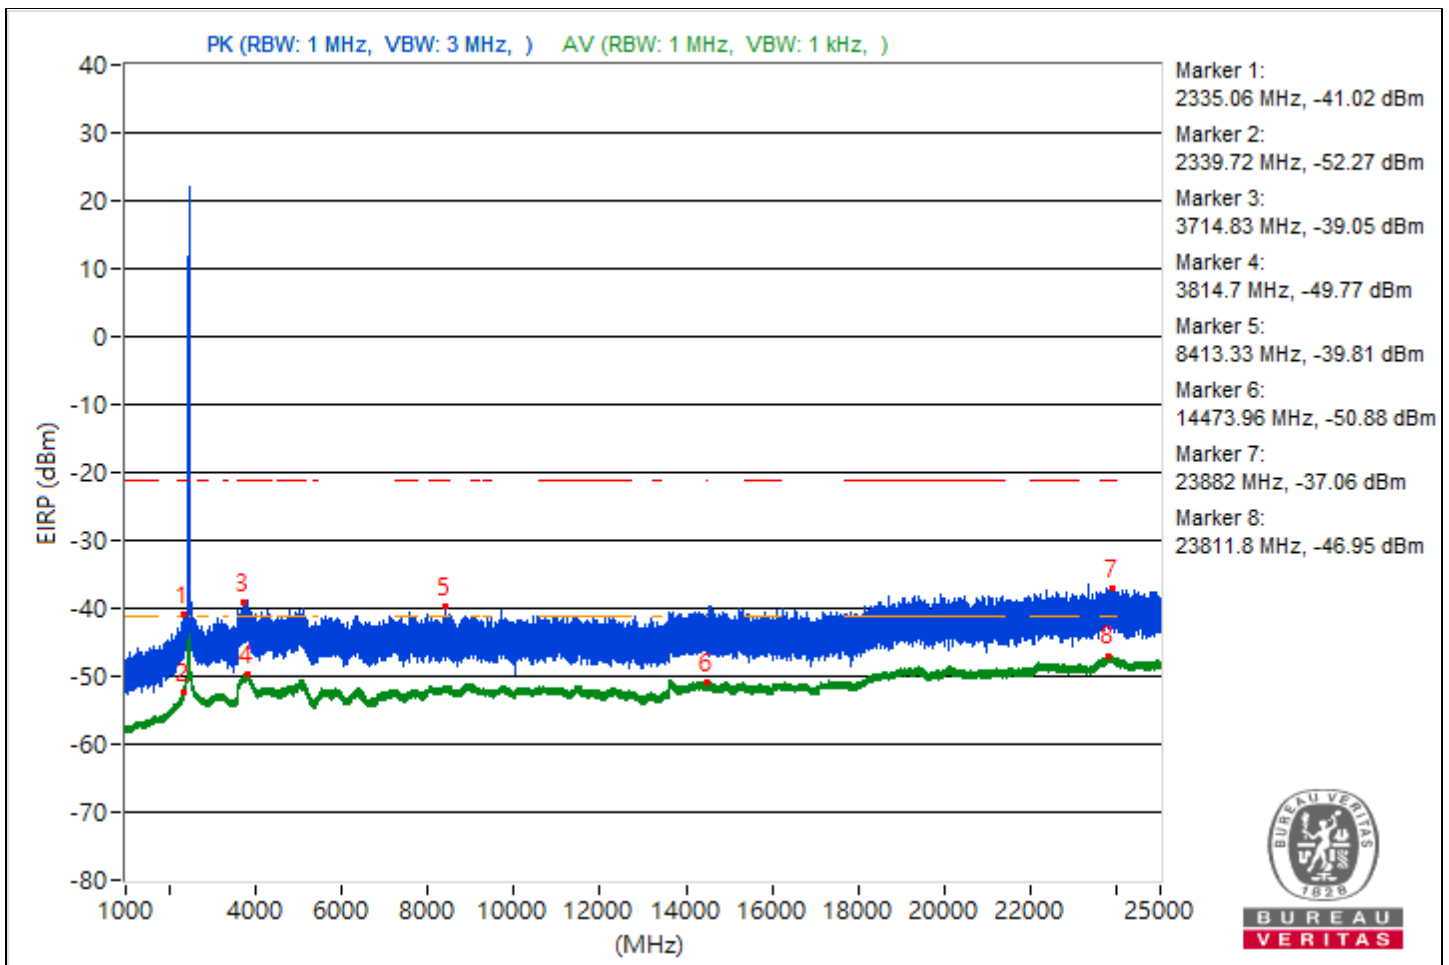

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	2293.29	52.15 PK	74	-21.85	-53.62	-49.44	4.92	-43.11
2	2336.07	42.74 AV	54	-11.26	-60.43	-60.48	4.92	-52.52
3	3842.23	56.12 PK	74	-17.88	-47.9	-46.38	4.92	-39.14
4	3803.42	45.45 AV	54	-8.55	-57.96	-57.54	4.92	-49.81
5	11162.04	55.28 PK	74	-18.72	-51.06	-46.1	4.92	-39.98
6	14496.71	44.31 AV	54	-9.69	-59.03	-58.73	4.92	-50.95
7	23881.3	58.46 PK	74	-15.54	-42.72	-48.57	4.92	-36.8
8	23845.7	48.26 AV	54	-5.74	-54.53	-55.36	4.92	-47

Note: Margin value = Emission Level - Limit value

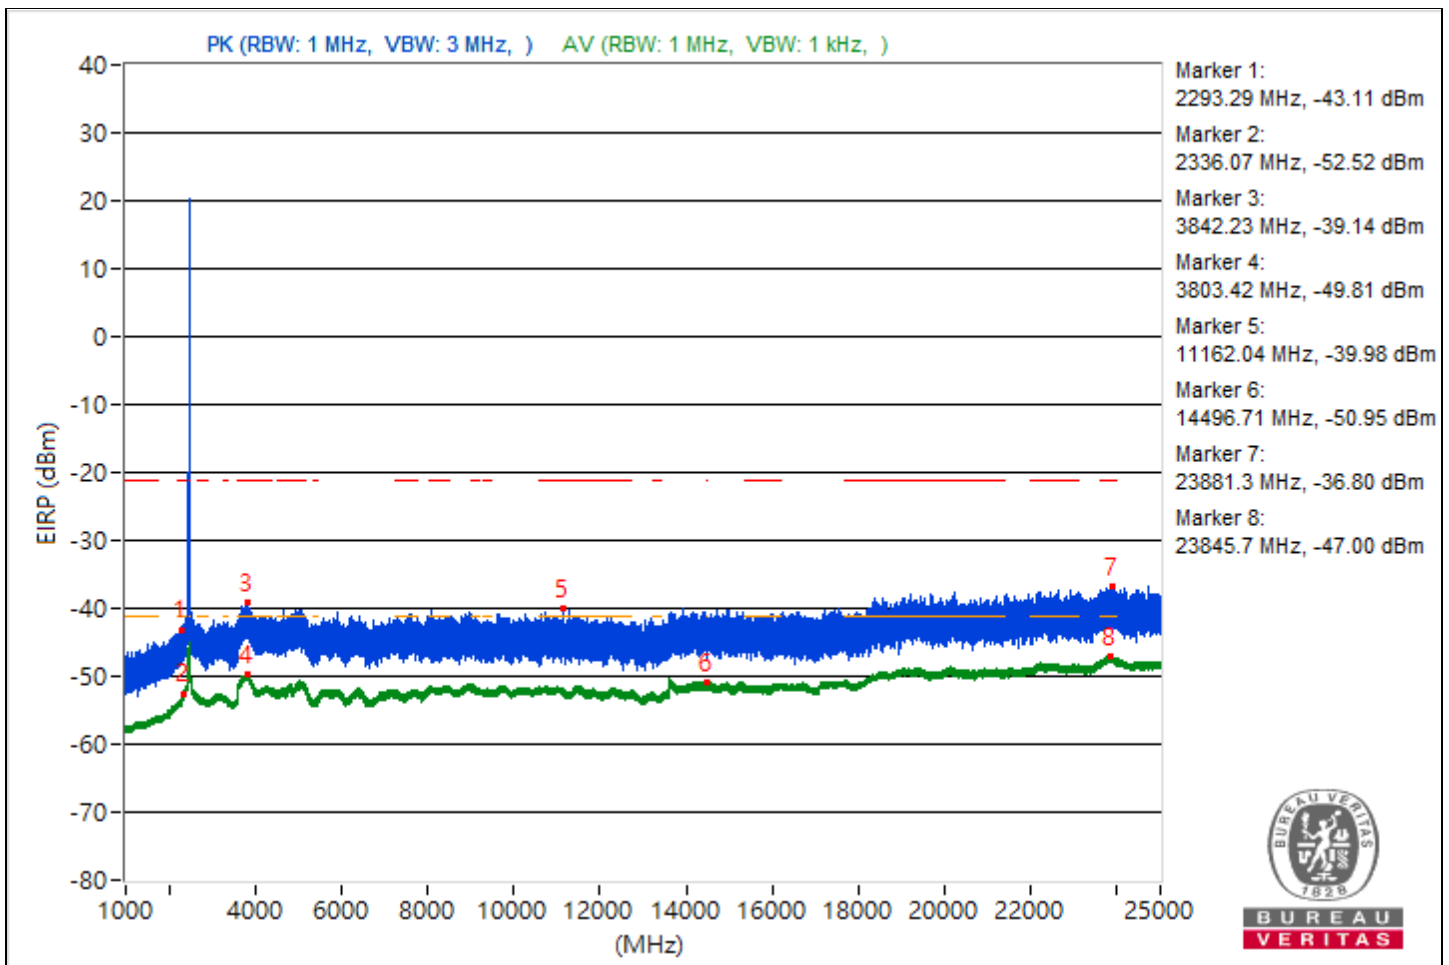


### Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2413.53	117.83 PK			17.3	15.21	3.18	22.57
2	*2411.13	105.71 AV			4.35	4.16	3.18	10.45
3	2388.71	67.76 PK	74	-6.24	-31.64	-37.74	3.18	-27.5
4	2389.92	53.13 AV	54	-0.87	-48.3	-48.34	3.18	-42.13
5	2491.52	61.76 PK	74	-12.24	-38.85	-40.74	3.18	-33.5
6	2484.04	49.31 AV	54	-4.69	-52.04	-52.24	3.18	-45.95

Notes:

1. Margin value = Emission Level - Limit value
2. " \* \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

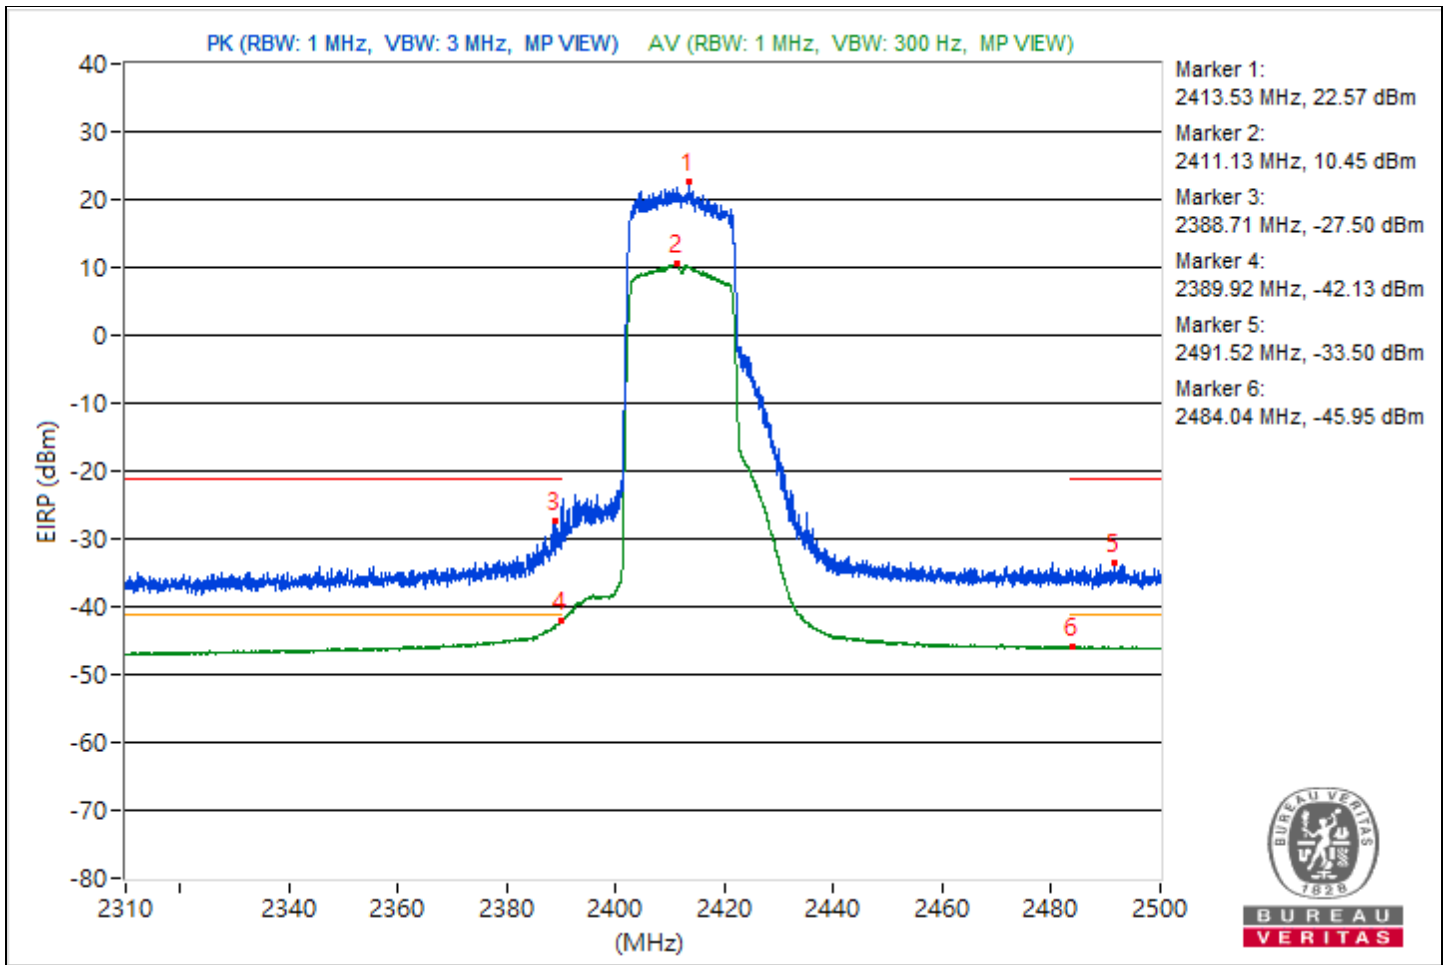


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2435.99	119.7 PK			16.7	19.39	3.18	24.44
2	*2435.87	108.34 AV			7	6.78	3.18	13.08
3	2389.54	65.29 PK	74	-8.71	-38.93	-34.48	3.18	-29.97
4	2389.75	50.45 AV	54	-3.55	-51.07	-50.93	3.18	-44.81
5	2483.5	64.19 PK	74	-9.81	-38.85	-36.09	3.18	-31.07
6	2484.89	50.63 AV	54	-3.37	-50.73	-50.91	3.18	-44.63

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

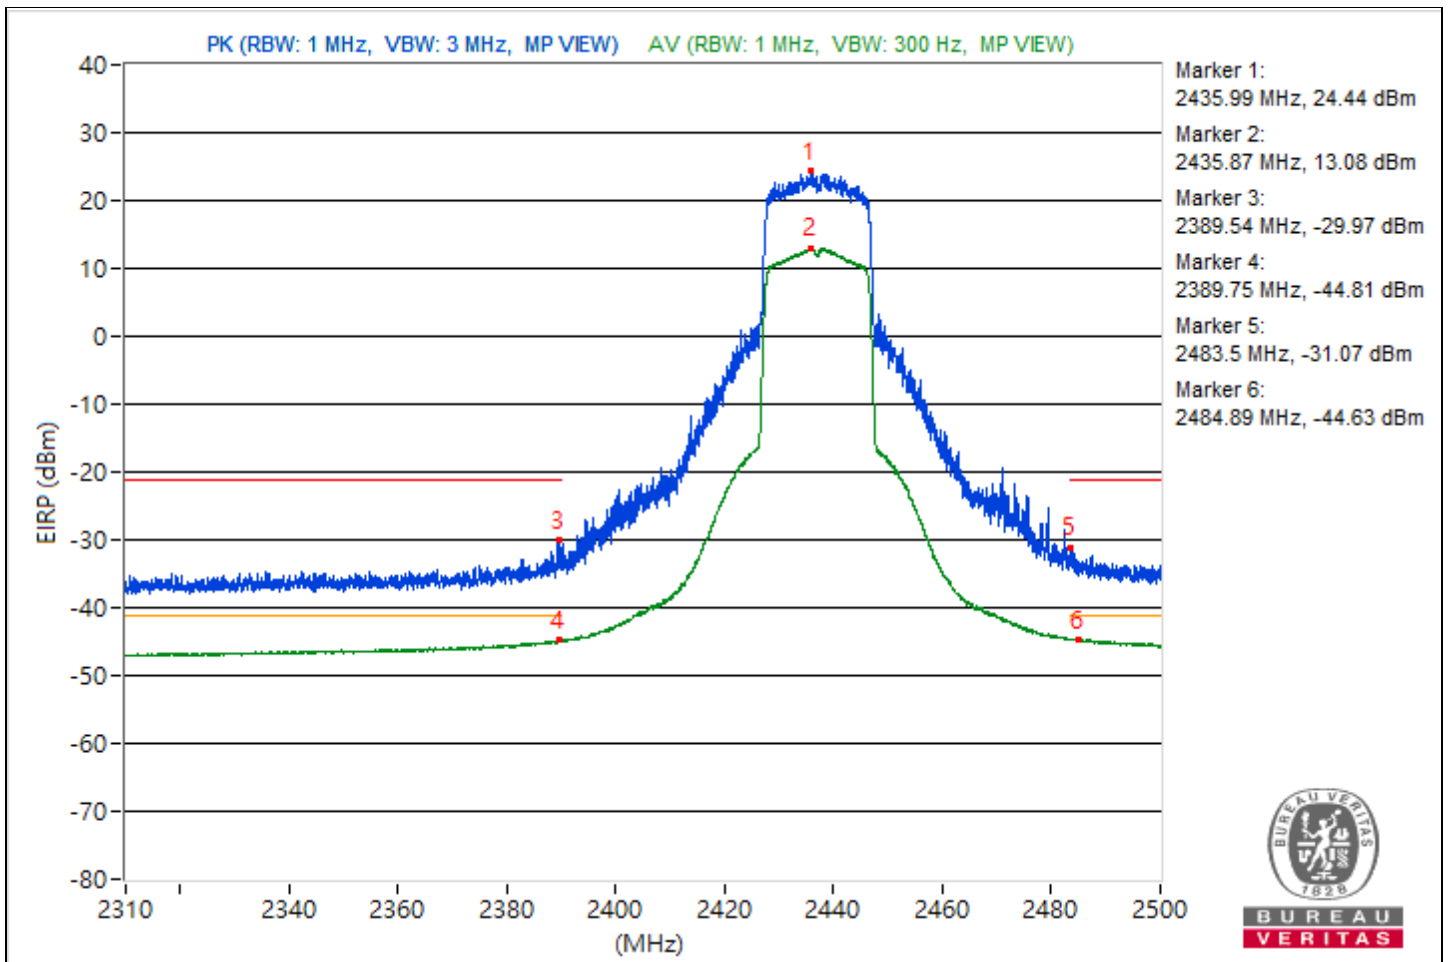


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2462.33	117.44 PK			17.13	14.45	3.18	22.18
2	*2460.76	106.44 AV			4.99	4.98	3.18	11.18
3	2389.37	60.61 PK	74	-13.39	-39.78	-42.26	3.18	-34.65
4	2389.97	49.05 AV	54	-4.95	-52.3	-52.5	3.18	-46.21
5	2483.64	67.64 PK	74	-6.36	-32.92	-34.95	3.18	-27.62
6	2483.5	53.65 AV	54	-0.35	-47.52	-48.11	3.18	-41.61

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

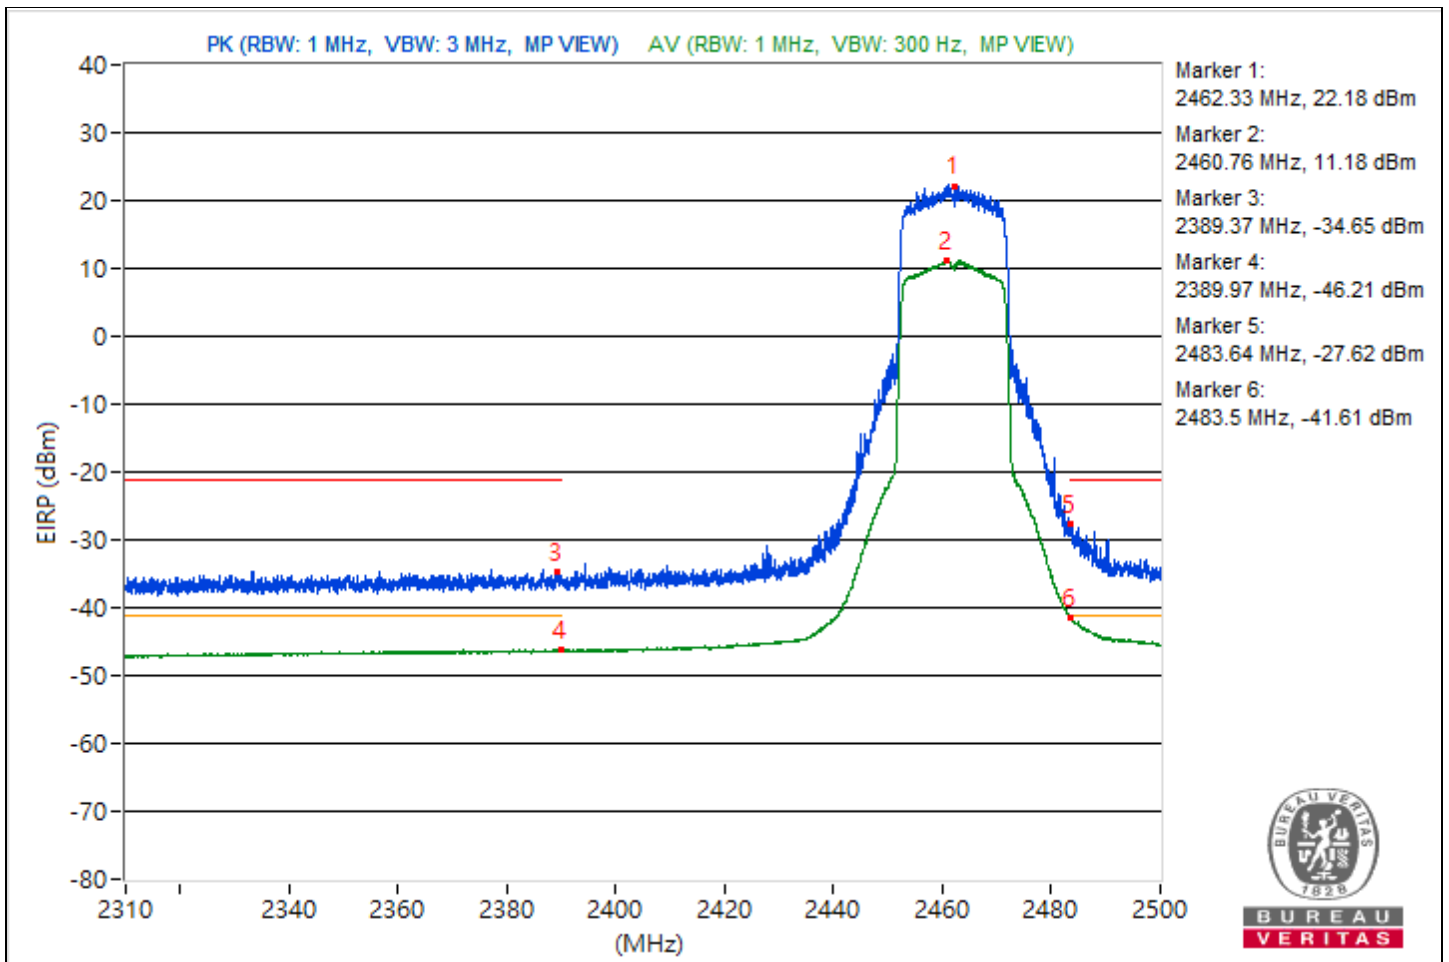




RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2467.94	116.56 PK			16.04	13.92	3.18	21.3
2	*2466.16	104.75 AV			3.26	3.34	3.18	9.49
3	2346.72	60.5 PK	74	-13.5	-42.84	-39.63	3.18	-34.76
4	2387.99	48.83 AV	54	-5.17	-52.41	-52.84	3.18	-46.43
5	2486.08	63.8 PK	74	-10.2	-39.86	-36.19	3.18	-31.46
6	2483.73	52.2 AV	54	-1.8	-49.29	-49.22	3.18	-43.06

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

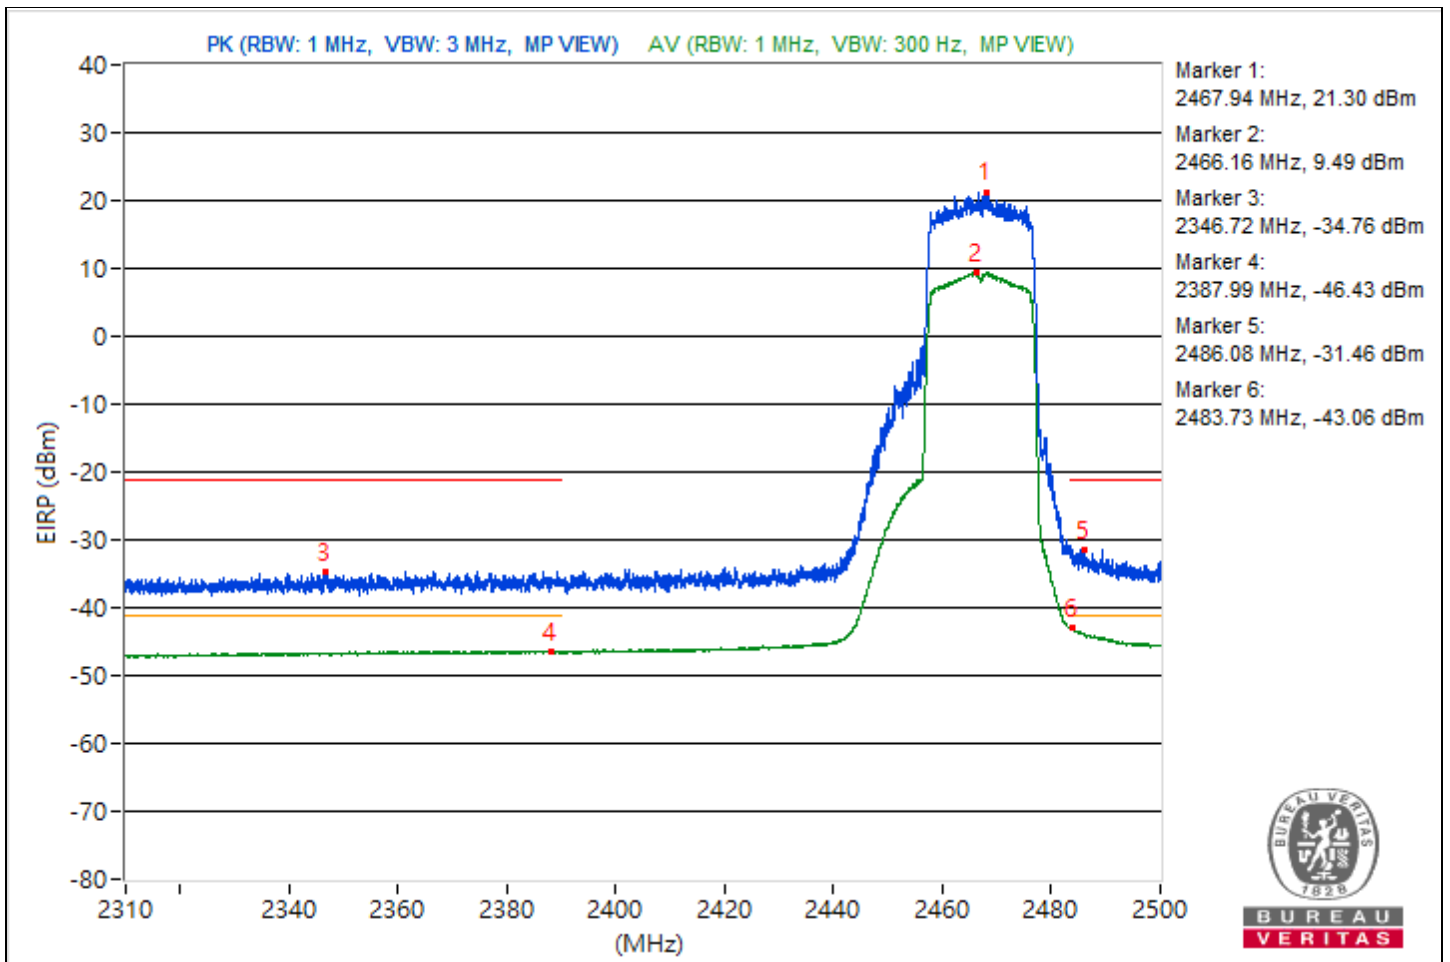


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.4	115.79 PK			15.18	13.3	3.18	20.53
2	*2471.05	104.22 AV			2.68	2.86	3.18	8.96
3	2382.27	61.12 PK	74	-12.88	-41.72	-39.28	3.18	-34.14
4	2389.8	48.85 AV	54	-5.15	-52.51	-52.7	3.18	-46.41
5	2486.32	66.38 PK	74	-7.62	-33.84	-36.8	3.18	-28.88
6	2483.5	53.4 AV	54	-0.6	-48.12	-47.98	3.18	-41.86

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

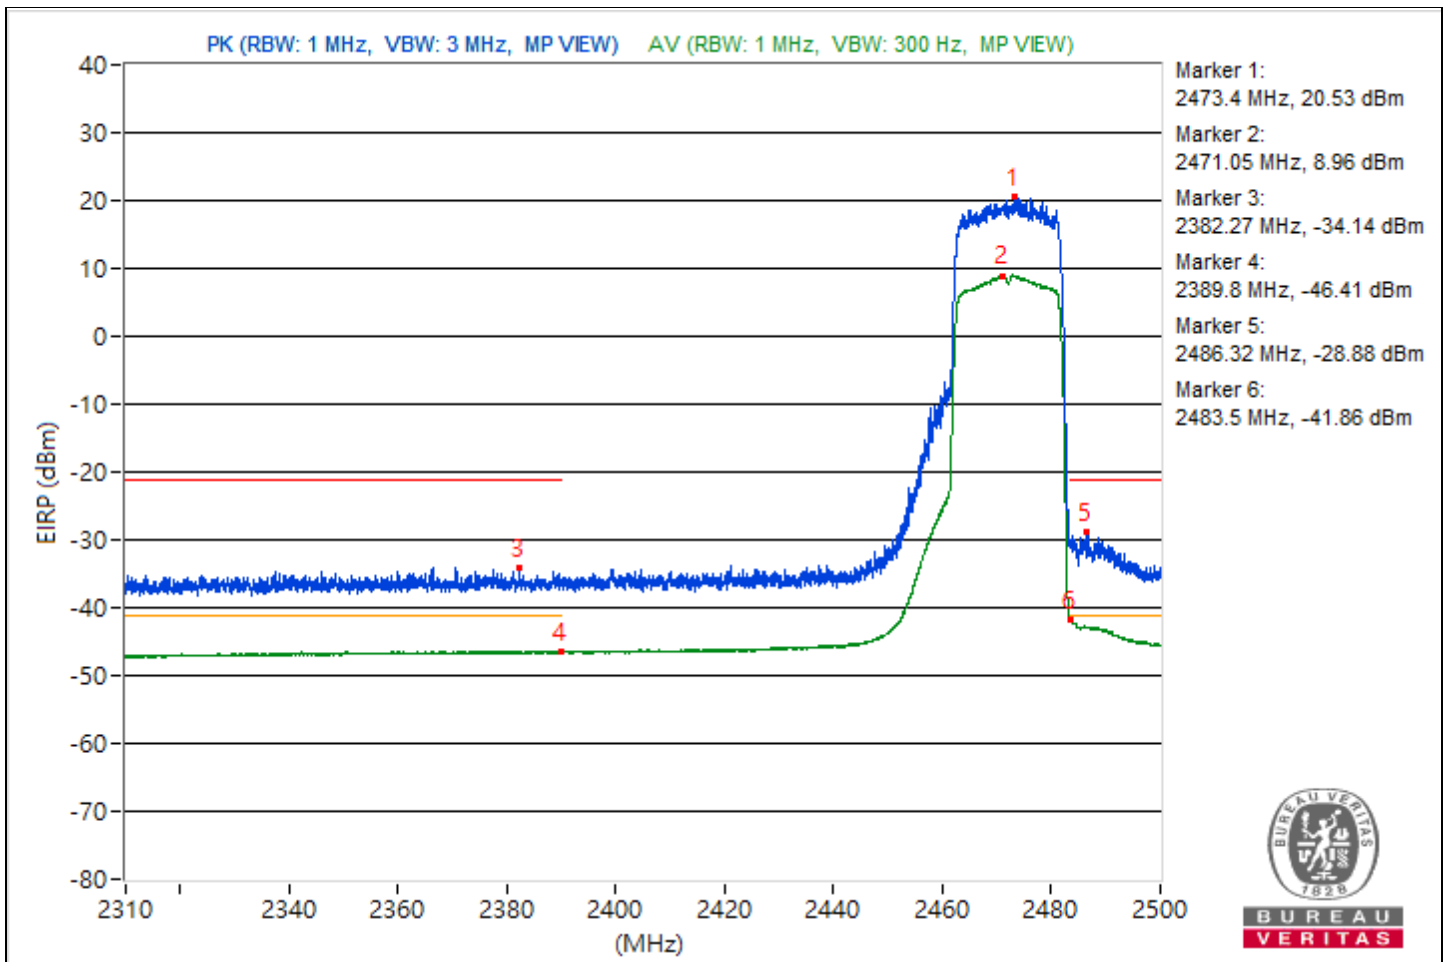


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2426.83	112.93 PK			10.6	12.22	3.18	17.67
2	*2421.03	101.18 AV			-0.31	-0.23	3.18	5.92
3	2387.59	65.45 PK	74	-8.55	-35.25	-36.92	3.18	-29.81
4	2389.85	53.36 AV	54	-0.64	-48.13	-48.05	3.18	-41.9
5	2490.48	60.84 PK	74	-13.16	-41.58	-39.81	3.18	-34.42
6	2486.84	49.47 AV	54	-4.53	-51.88	-52.08	3.18	-45.79

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

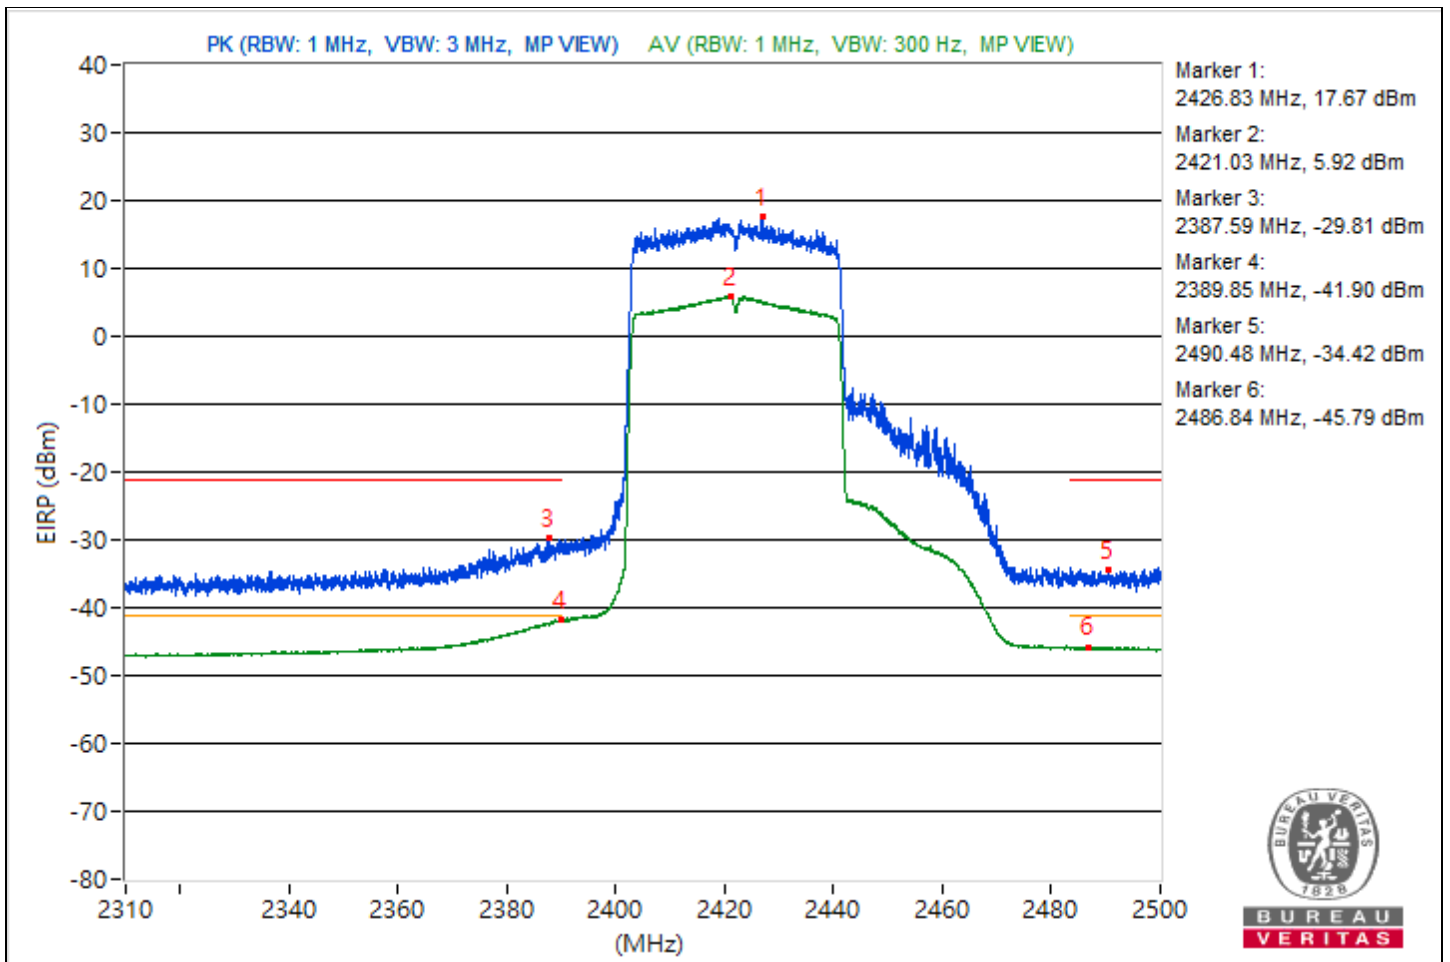


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2438.37	116.03 PK			12.1	16.15	3.18	20.77
2	*2435.71	104.07 AV			2.67	2.56	3.18	8.81
3	2388.97	70.98 PK	74	-3.02	-28.7	-33.5	3.18	-24.28
4	2389.25	53.79 AV	54	-0.21	-47.64	-47.69	3.18	-41.47
5	2487.82	69.69 PK	74	-4.31	-35.61	-29.75	3.18	-25.57
6	2483.85	52.9 AV	54	-1.1	-48.14	-49	3.18	-42.36

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

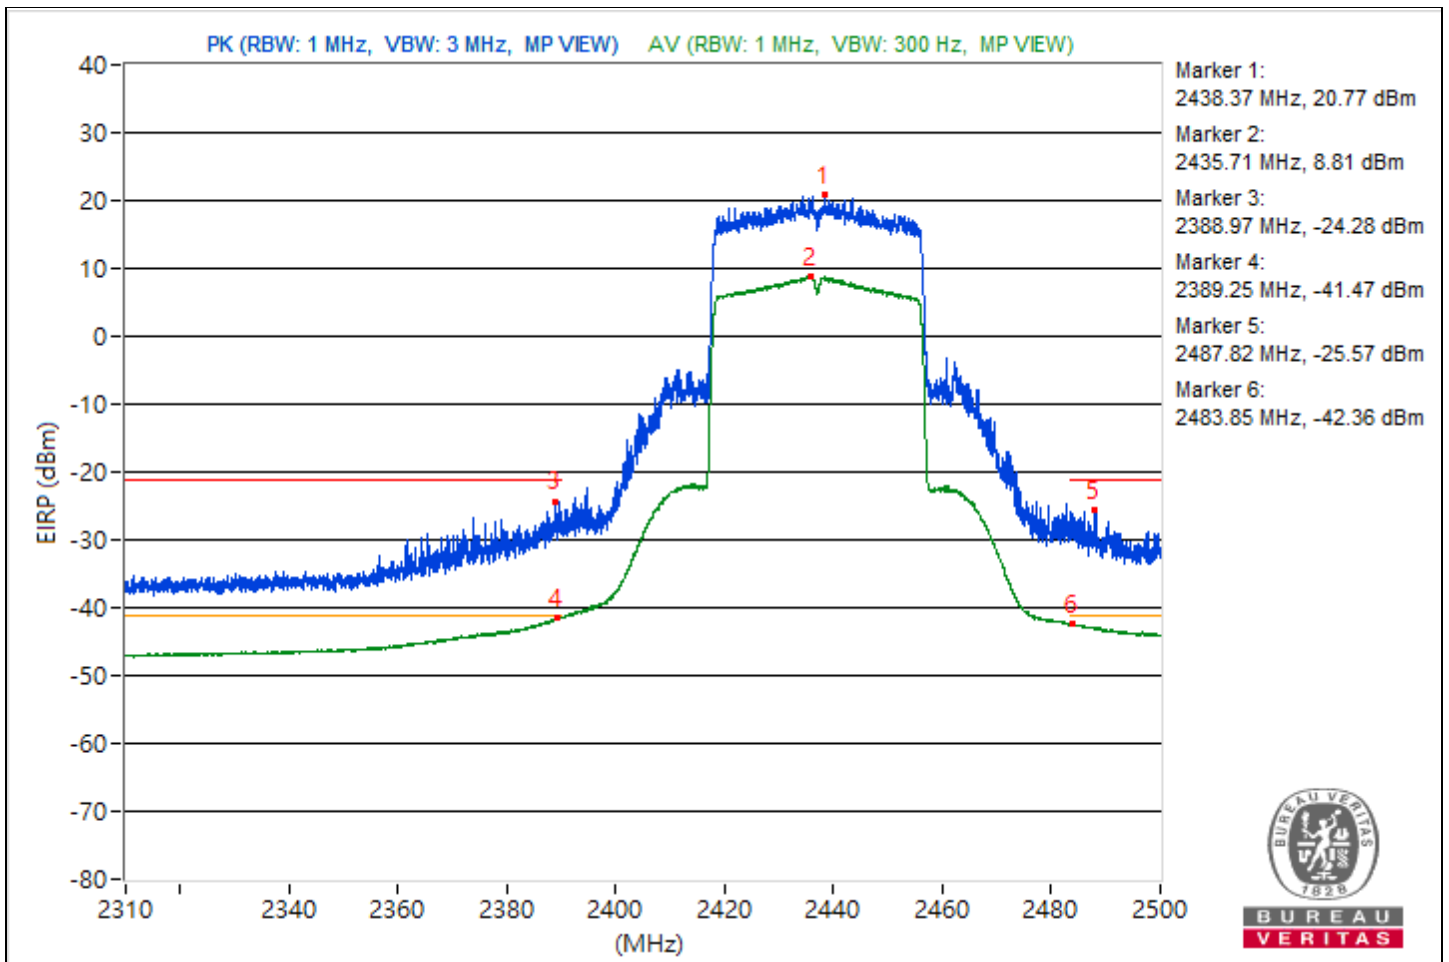


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2455.52	114.41 PK			14.58	10.37	3.18	19.15
2	*2453.02	102.39 AV			0.67	1.19	3.18	7.13
3	2389.68	61.69 PK	74	-12.31	-38.23	-42.12	3.18	-33.57
4	2389.44	49.96 AV	54	-4.04	-51.54	-51.45	3.18	-45.3
5	2486.94	65.87 PK	74	-8.13	-36.69	-34.69	3.18	-29.39
6	2484.42	53.24 AV	54	-0.76	-48.27	-48.15	3.18	-42.02

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

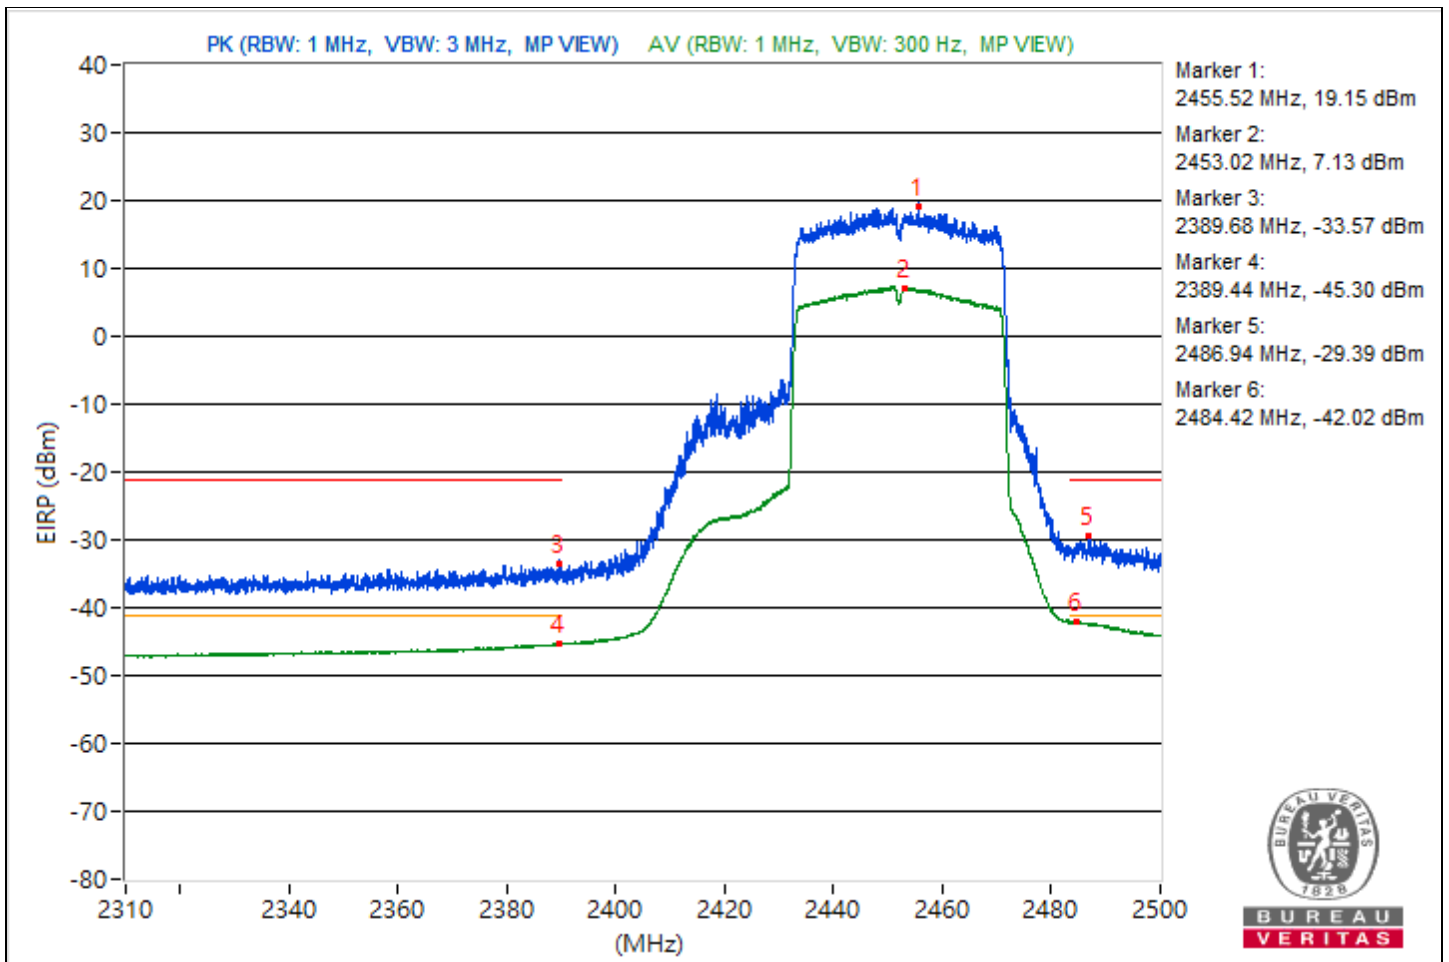


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2457.87	114.19 PK			10.44	14.23	3.18	18.93
2	*2456.09	102.13 AV			0.58	0.78	3.18	6.87
3	2365.86	61.2 PK	74	-12.8	-41.98	-39.01	3.18	-34.06
4	2389.28	49.36 AV	54	-4.64	-52.2	-51.97	3.18	-45.9
5	2488.12	65.13 PK	74	-8.87	-34.71	-38.9	3.18	-30.13
6	2485.47	52.65 AV	54	-1.35	-48.72	-48.87	3.18	-42.61

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

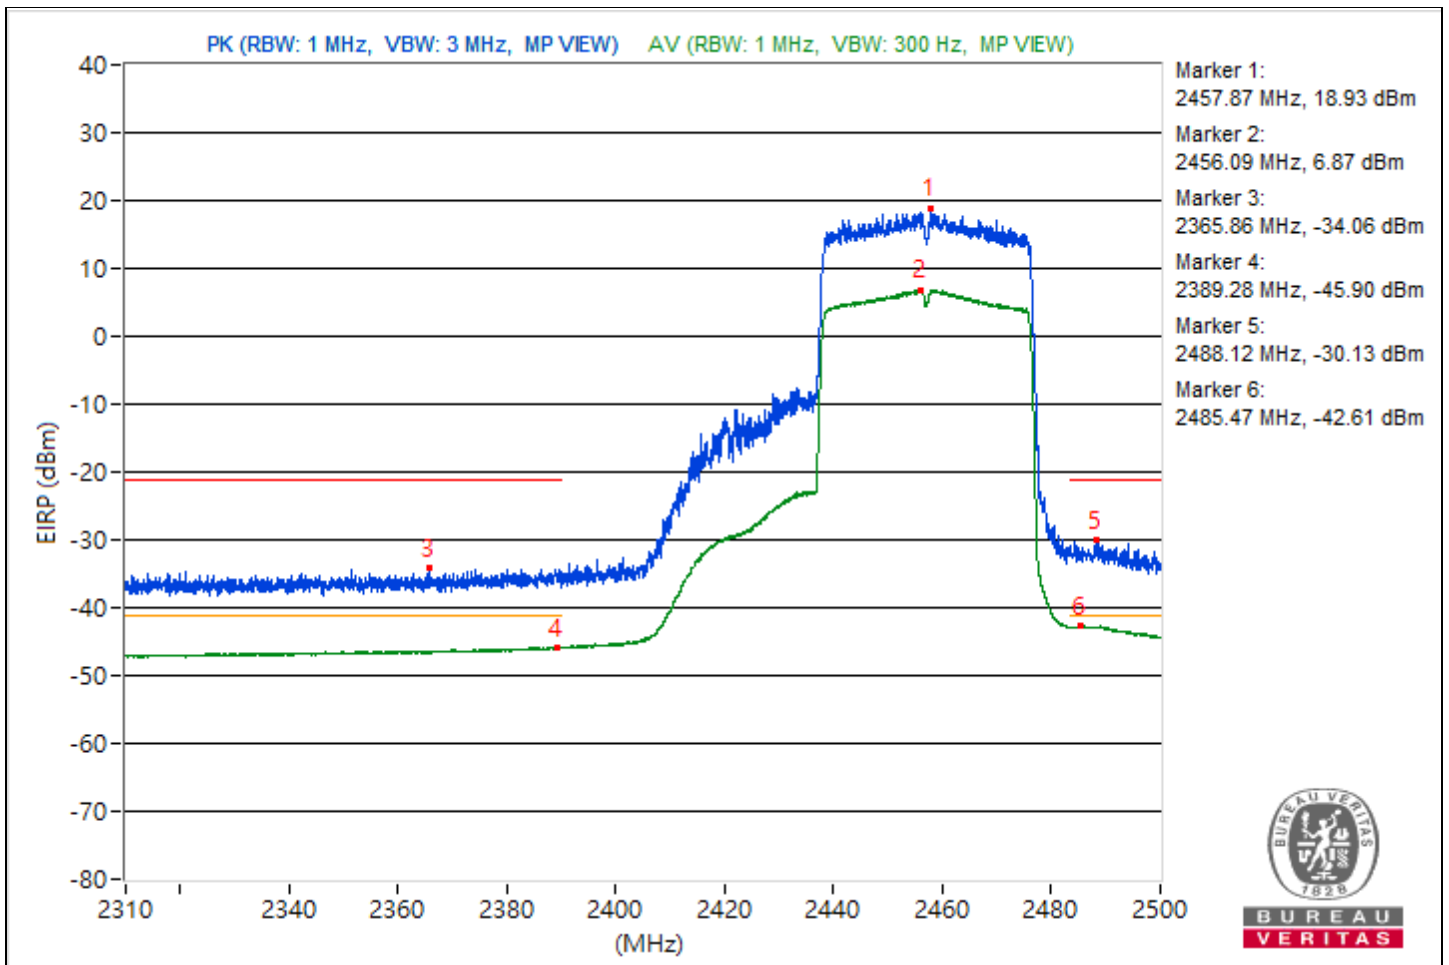


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2459.13	113.14 PK			13	9.81	3.18	17.88
2	*2461.17	101.54 AV			-0.04	0.21	3.18	6.28
3	2388.21	61.28 PK	74	-12.72	-42.19	-38.79	3.18	-33.98
4	2388.97	49.29 AV	54	-4.71	-52.02	-52.31	3.18	-45.97
5	2491.07	64.86 PK	74	-9.14	-35.42	-38.2	3.18	-30.4
6	2487.2	52.2 AV	54	-1.8	-49.39	-49.11	3.18	-43.06

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

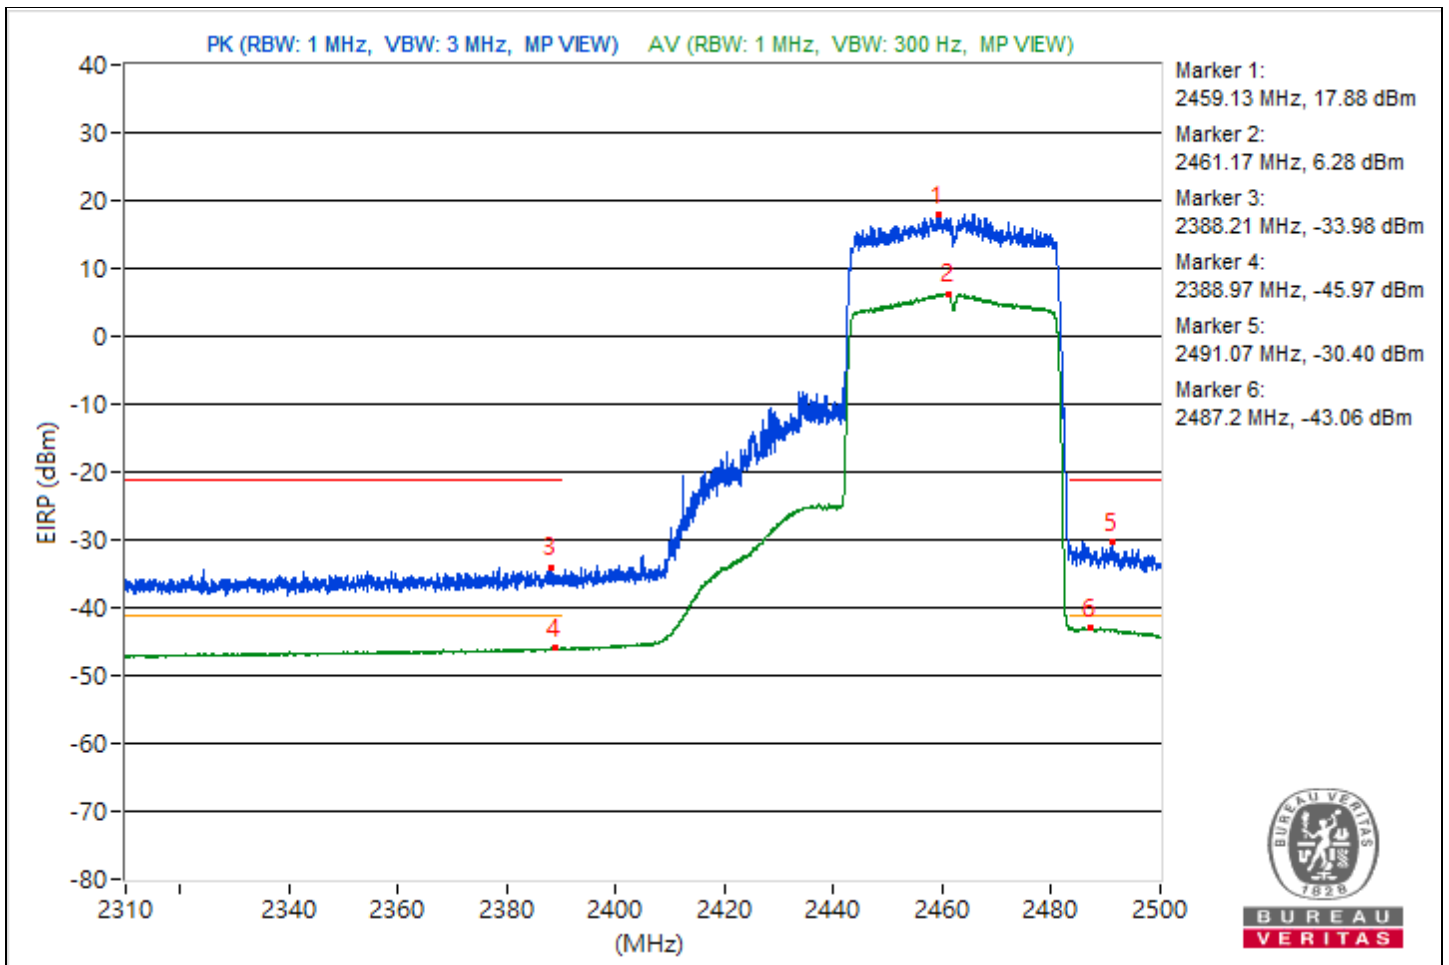


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2403.81	124.63 PK			22.52	23.76	3.18	29.37
2	*2403.76	110.9 AV			9.37	9.54	3.18	15.64
3	2387.45	70.52 PK	74	-3.48	-34.69	-28.94	3.18	-24.74
4	2386.69	53.75 AV	54	-0.25	-48.24	-47.23	3.18	-41.51
5	2484.89	60.45 PK	74	-13.55	-40.14	-42.08	3.18	-34.81
6	2493.33	49.14 AV	54	-4.86	-52.11	-52.53	3.18	-46.12

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

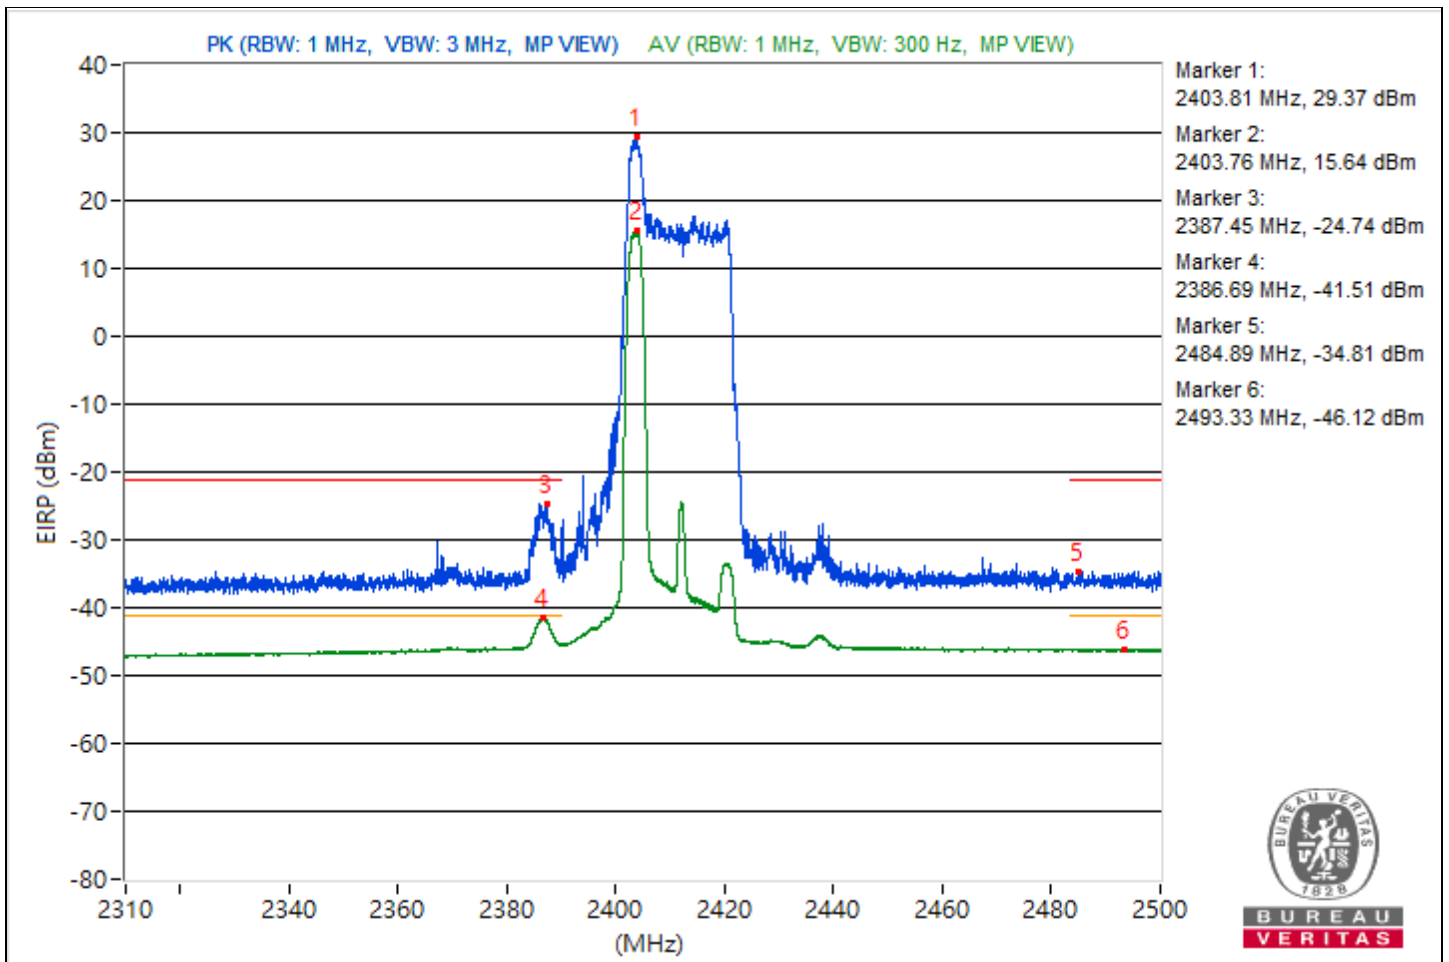




RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.89	126.89 PK			24.63	26.12	3.18	31.63
2	*2428.73	113.53 AV			12.1	12.06	3.18	18.27
3	2387.54	68.56 PK	74	-5.44	-31.88	-34.23	3.18	-26.7
4	2389.4	49.92 AV	54	-4.08	-51.56	-51.51	3.18	-45.34
5	2484.63	70.55 PK	74	-3.45	-30.93	-30.88	3.18	-24.71
6	2483.54	50.46 AV	54	-3.54	-51.09	-50.88	3.18	-44.8

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

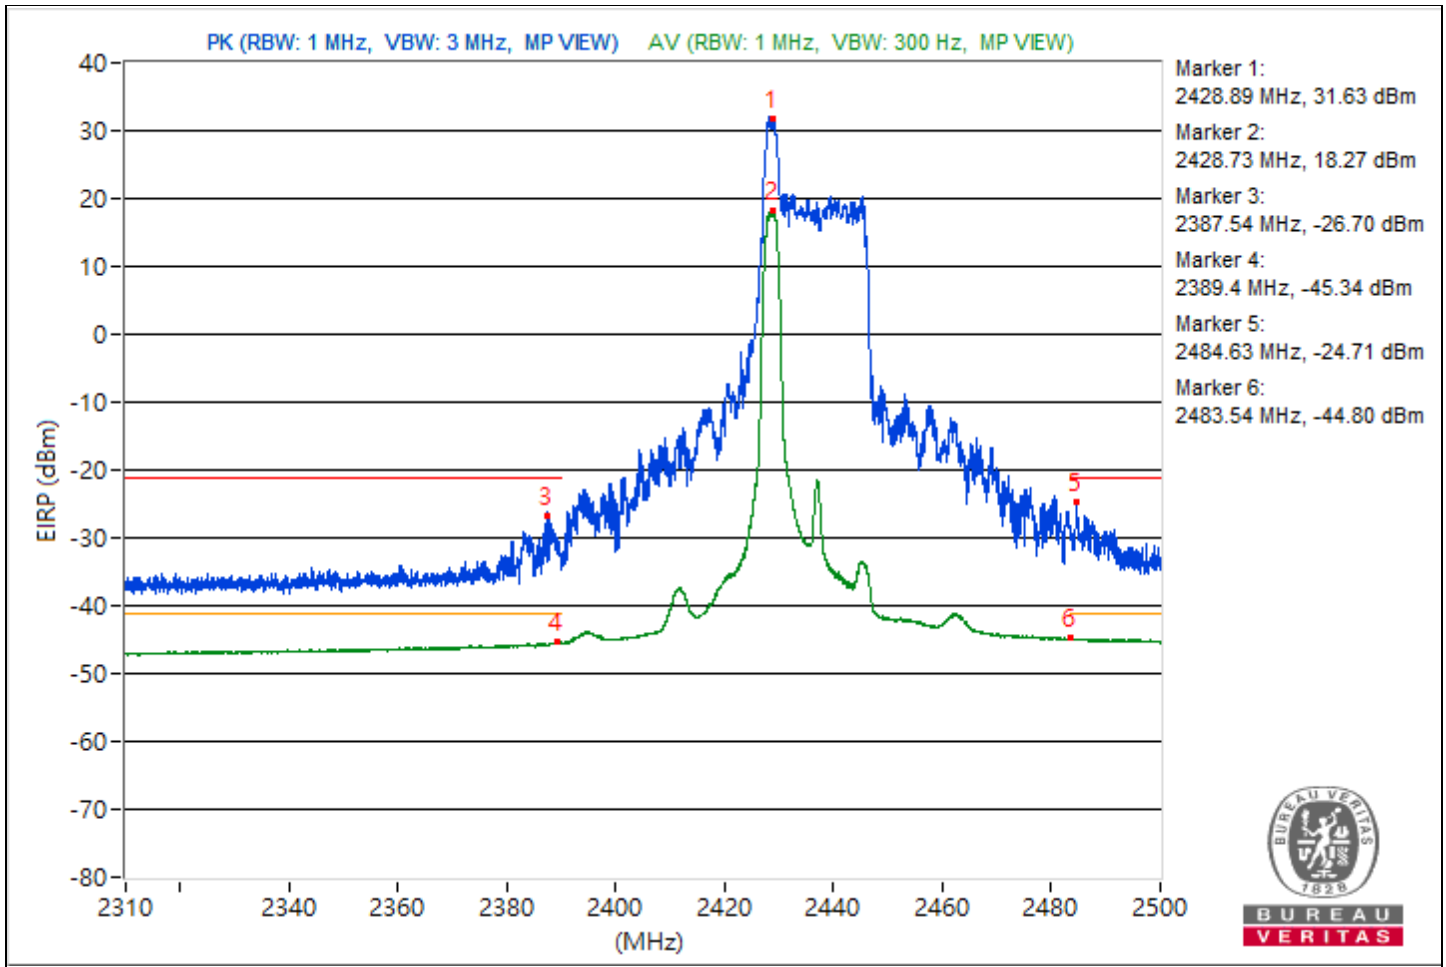


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.72	123.64 PK			22.9	21.33	3.18	28.38
2	*2470.19	109.95 AV			8.61	8.4	3.18	14.69
3	2378.07	60.8 PK	74	-13.2	-42.59	-39.31	3.18	-34.46
4	2388.07	48.81 AV	54	-5.19	-52.55	-52.73	3.18	-46.45
5	2488.79	69.03 PK	74	-4.97	-35.41	-30.66	3.18	-26.23
6	2487.34	52.19 AV	54	-1.81	-49.38	-49.15	3.18	-43.07

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

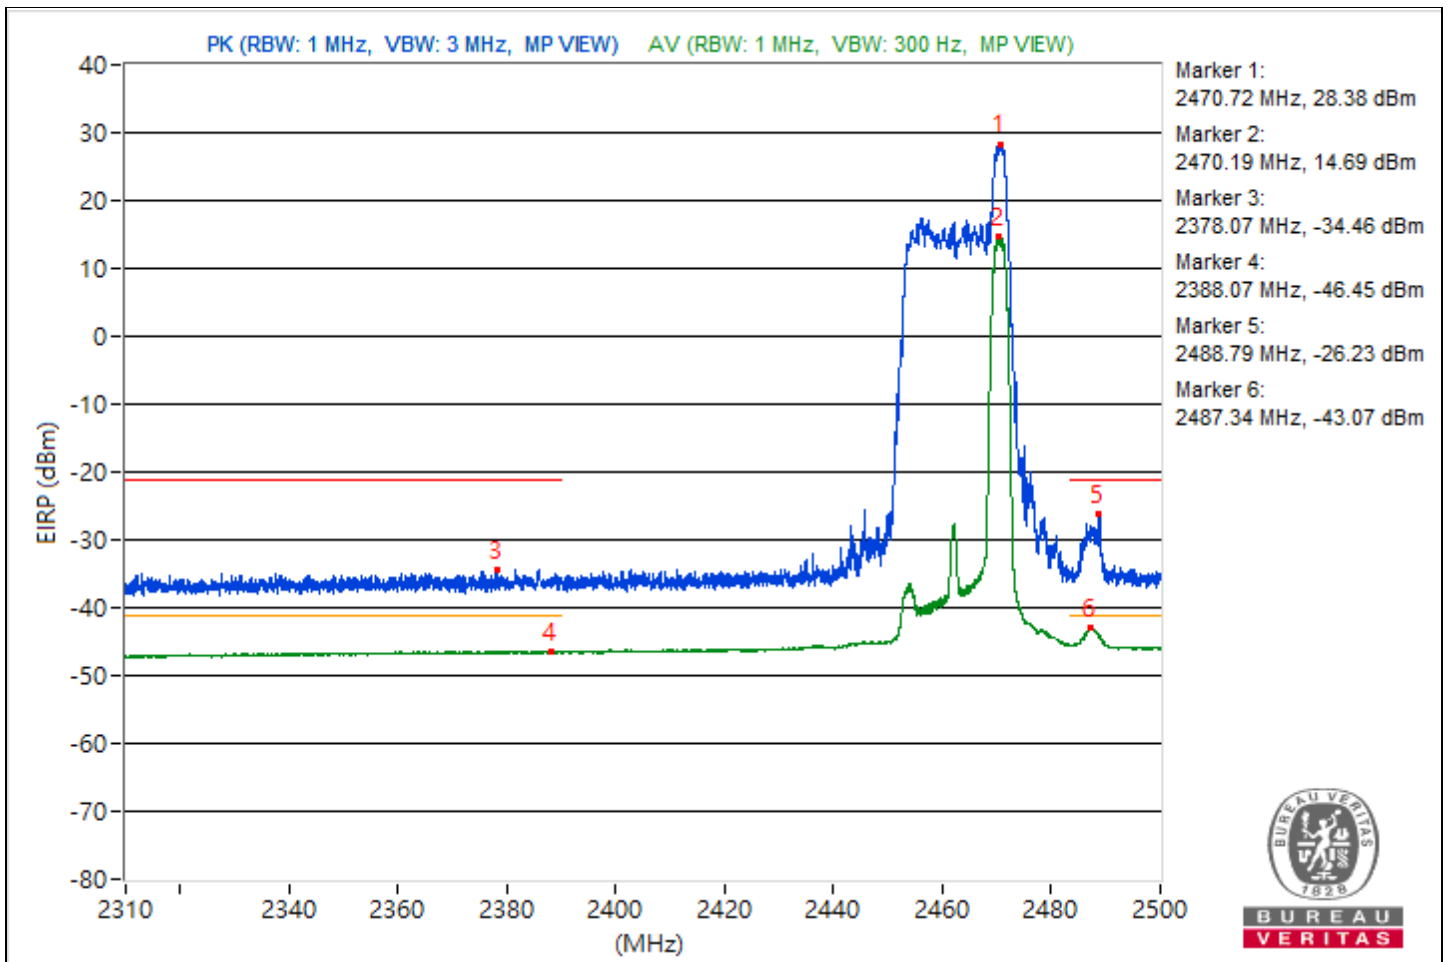


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.18	124.46 PK			21.95	23.86	3.18	29.2
2	*2475.18	109.49 AV			8.19	7.89	3.18	14.23
3	2383.89	61.08 PK	74	-12.92	-41.93	-39.23	3.18	-34.18
4	2382.3	48.7 AV	54	-5.3	-52.88	-52.62	3.18	-46.56
5	2492.3	68.88 PK	74	-5.12	-30.48	-36.76	3.18	-26.38
6	2492.57	51.72 AV	54	-2.28	-49.82	-49.65	3.18	-43.54

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

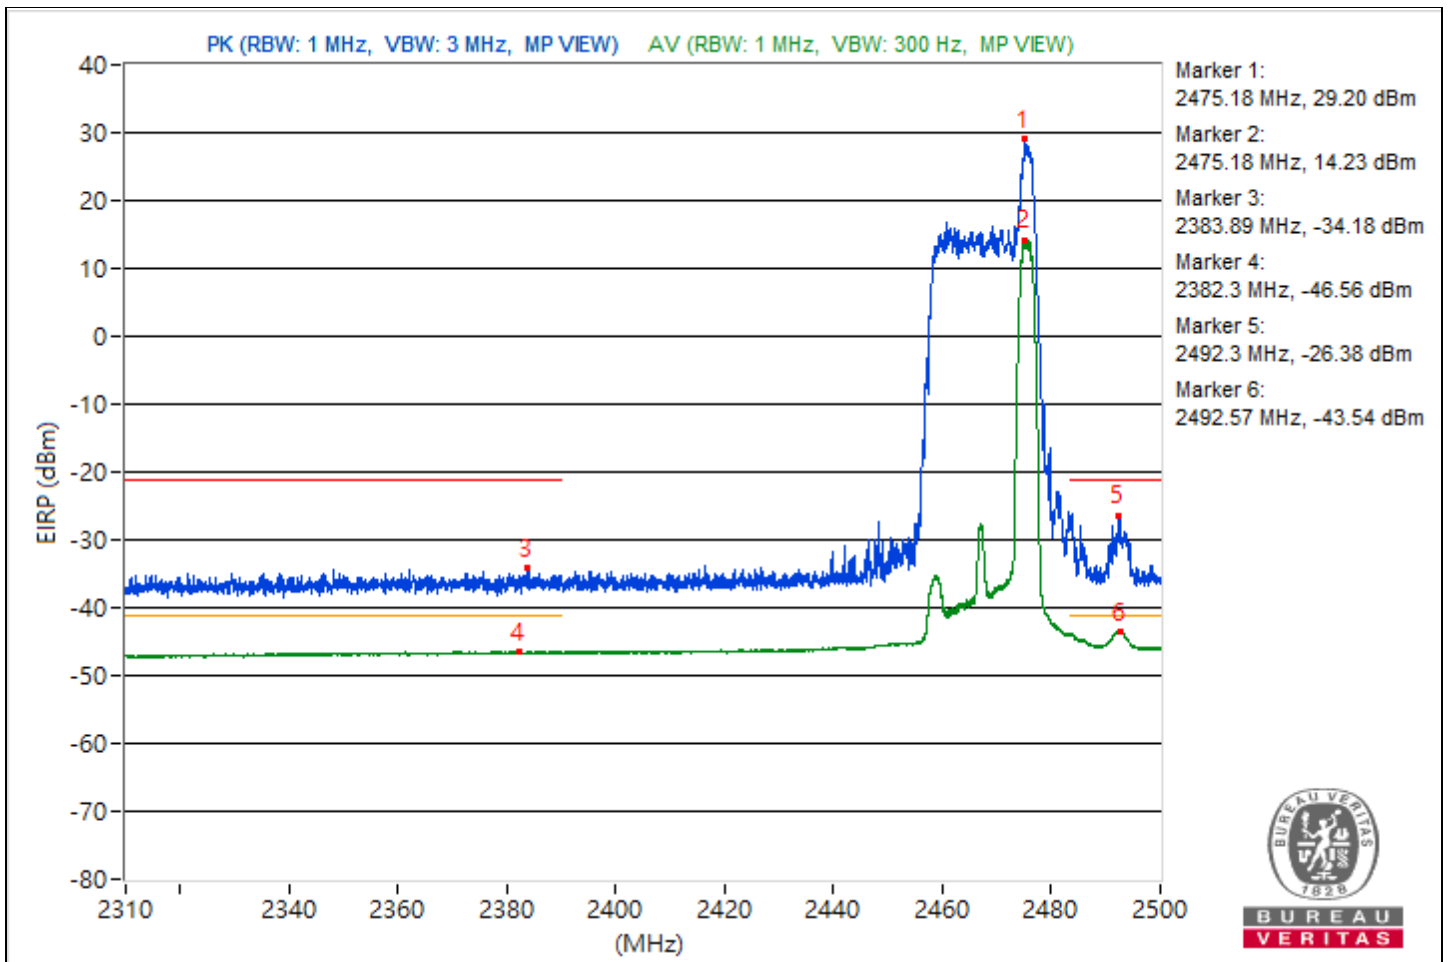


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2480.88	117.79 PK			15.84	16.79	3.18	22.53
2	*2480.41	104.17 AV			2.81	2.63	3.18	8.91
3	2347.95	60.38 PK	74	-13.62	-39.73	-43	3.18	-34.88
4	2386.33	48.53 AV	54	-5.47	-53.03	-52.82	3.18	-46.73
5	2483.5	73.87 PK	74	-0.13	-27.97	-27.22	3.18	-21.39
6	2483.52	52.89 AV	54	-1.11	-48.49	-48.63	3.18	-42.37

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

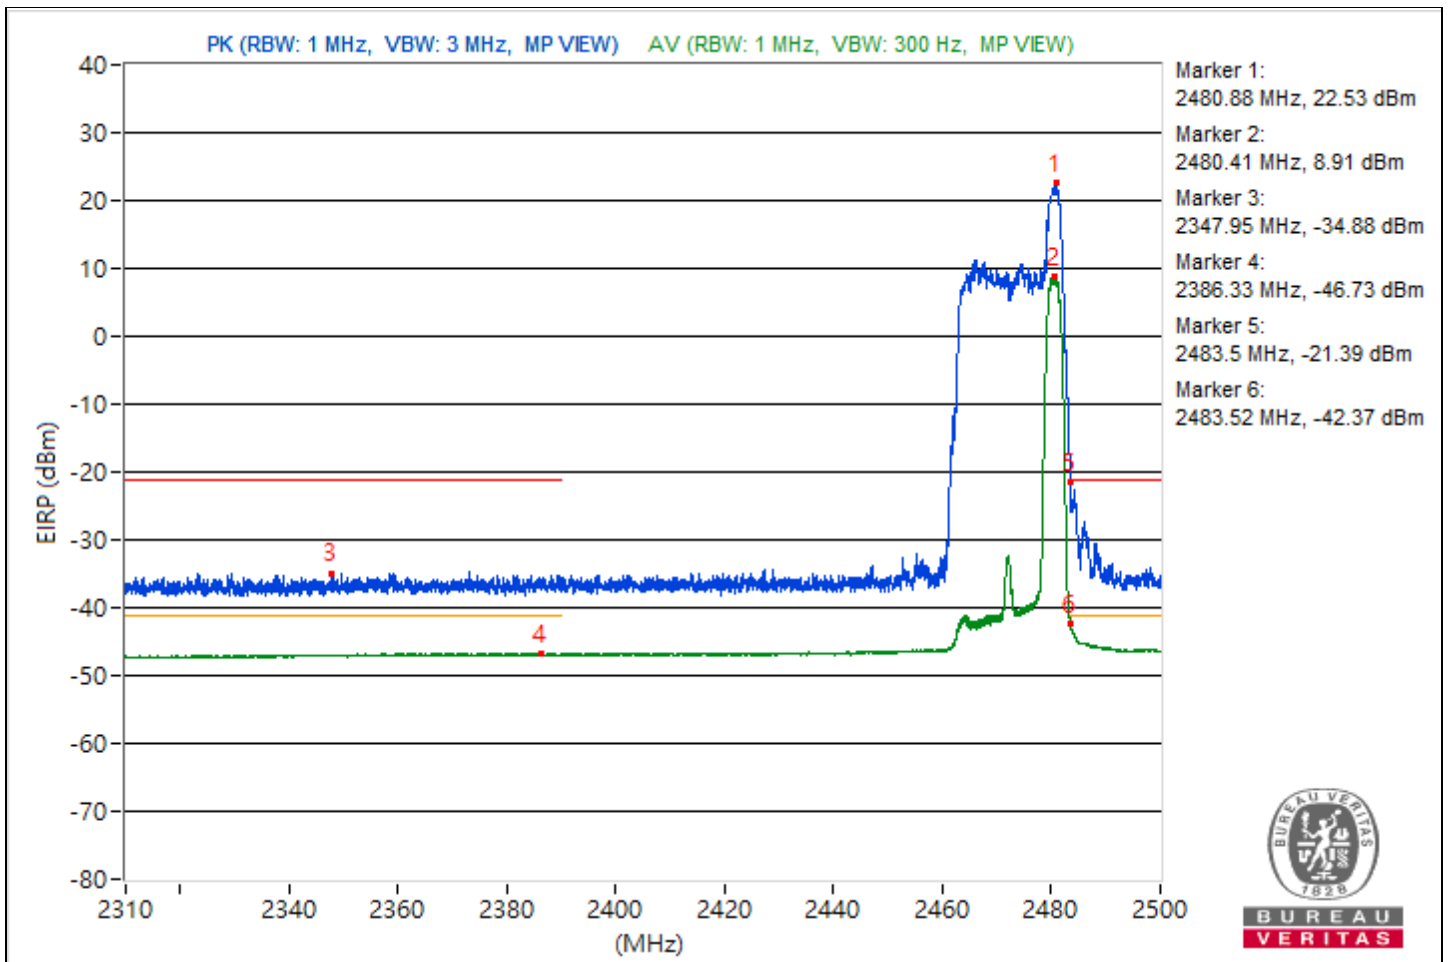


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2405.14	121.14 PK			20.43	18.79	3.18	25.88
2	*2403.98	108.41 AV			7.05	6.87	3.18	13.15
3	2388.47	66.69 PK	74	-7.31	-32.85	-38.26	3.18	-28.57
4	2389.99	51.49 AV	54	-2.51	-50.02	-49.91	3.18	-43.77
5	2492.07	60.73 PK	74	-13.27	-42.12	-39.66	3.18	-34.53
6	2488.41	49.14 AV	54	-4.86	-52.14	-52.49	3.18	-46.12

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

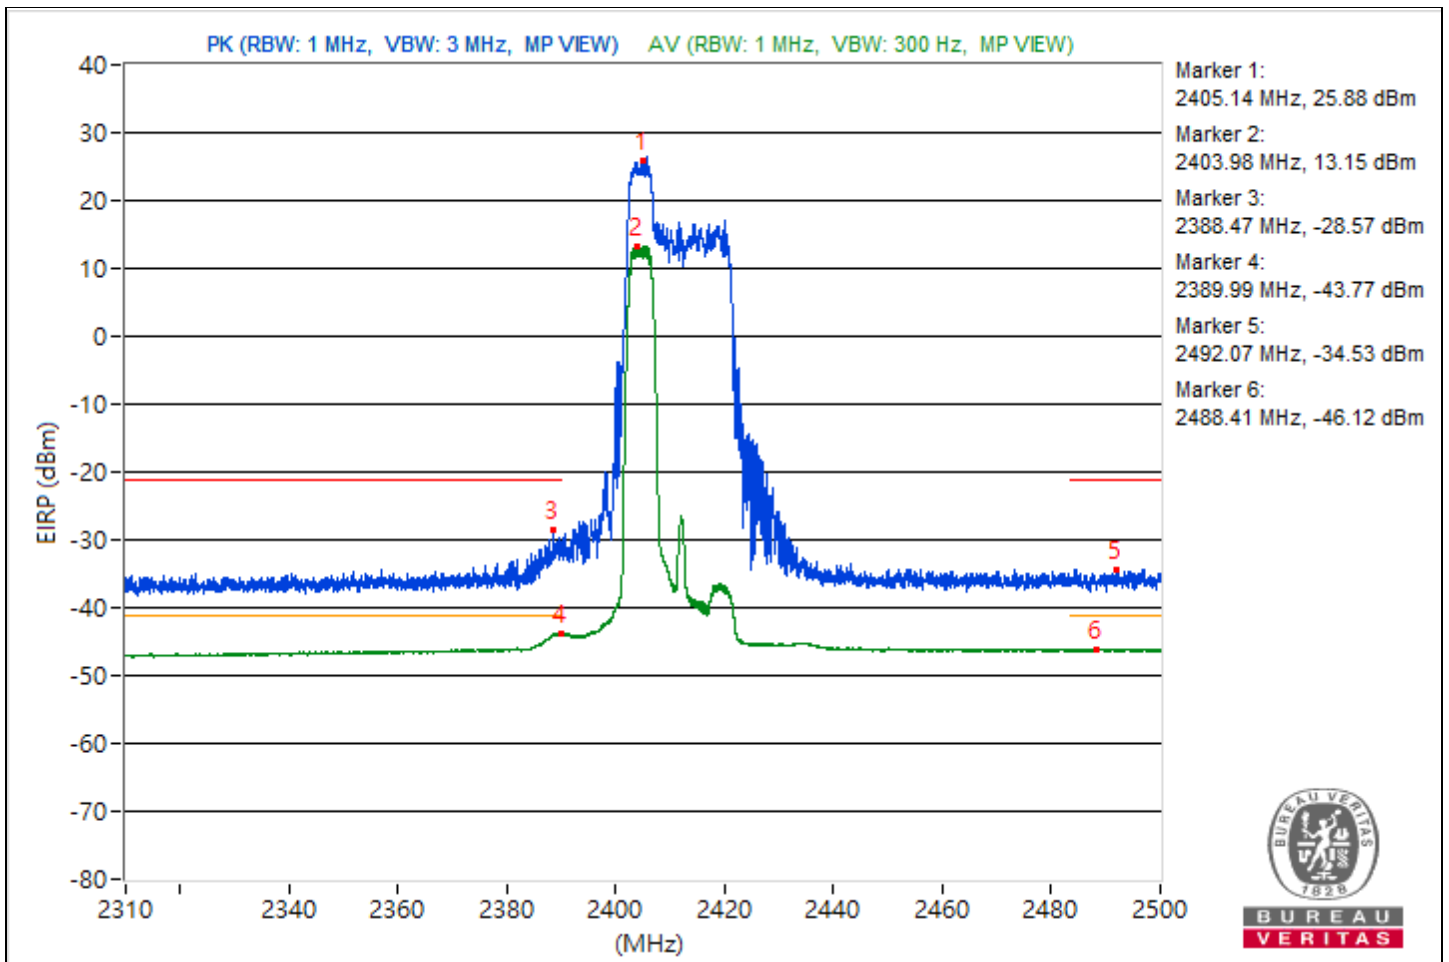


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2428.35	124.38 PK			21.8	23.82	3.18	29.12
2	*2429.37	111.99 AV			10.31	10.75	3.18	16.73
3	2389.3	67.38 PK	74	-6.62	-34.36	-33.79	3.18	-27.88
4	2389.8	49.45 AV	54	-4.55	-52.07	-51.94	3.18	-45.81
5	2483.5	65.49 PK	74	-8.51	-34.82	-37.54	3.18	-29.77
6	2485.04	49.66 AV	54	-4.34	-51.92	-51.67	3.18	-45.6

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

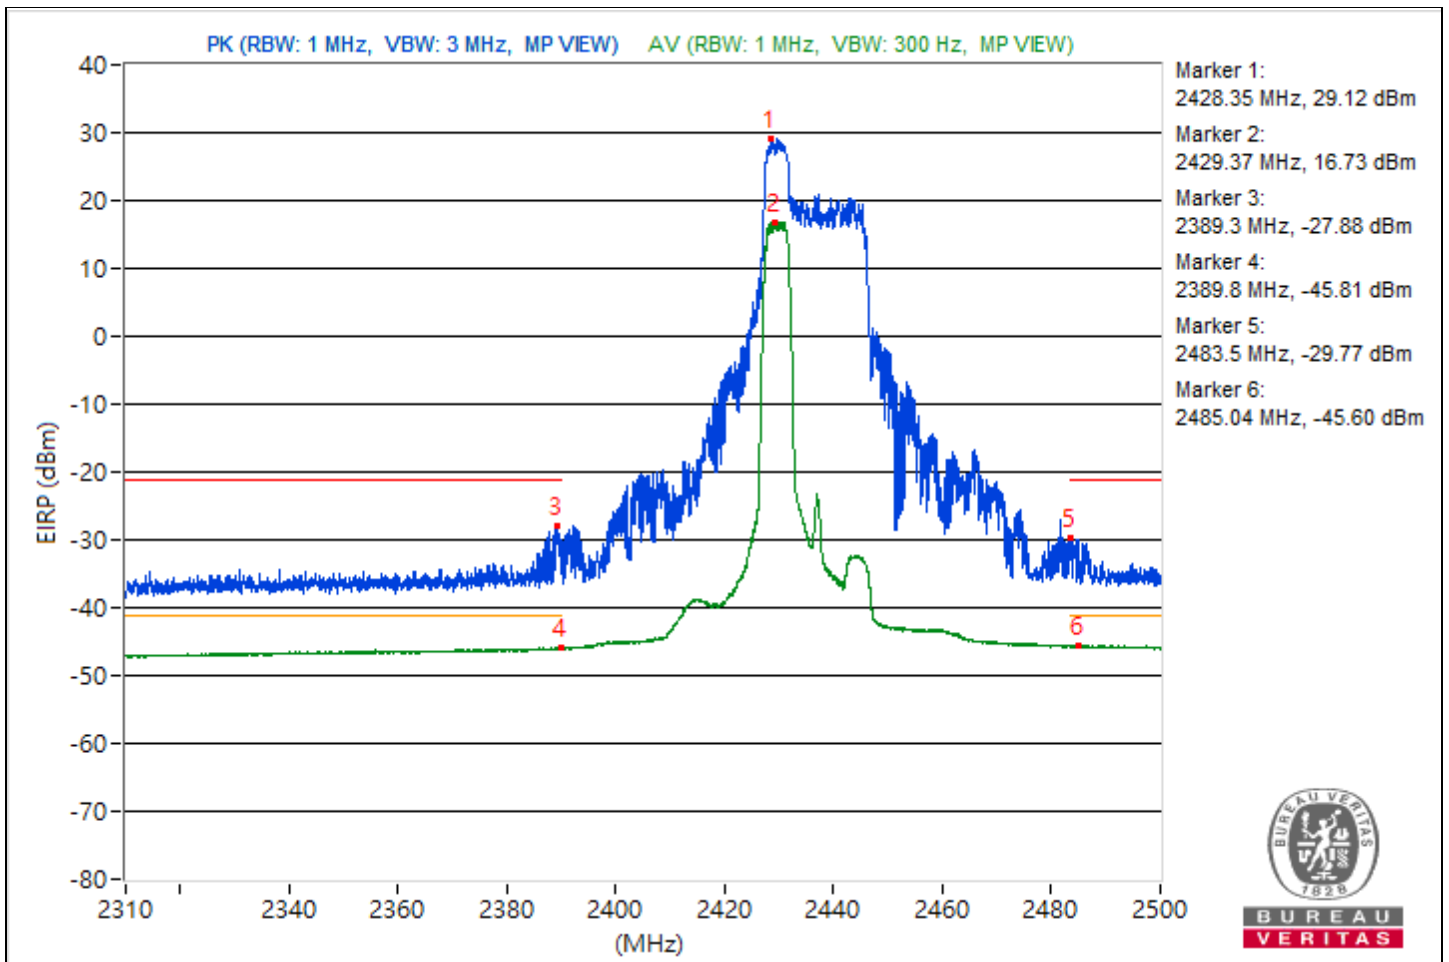


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2470.36	122.09 PK			21.52	19.53	3.18	26.83
2	*2468.55	108.99 AV			7.71	7.37	3.18	13.73
3	2379.26	60.71 PK	74	-13.29	-39.32	-42.88	3.18	-34.55
4	2389.18	48.84 AV	54	-5.16	-52.48	-52.73	3.18	-46.42
5	2484.44	68.14 PK	74	-5.86	-32.9	-33.76	3.18	-27.12
6	2483.52	52.19 AV	54	-1.81	-49.47	-49.06	3.18	-43.07

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

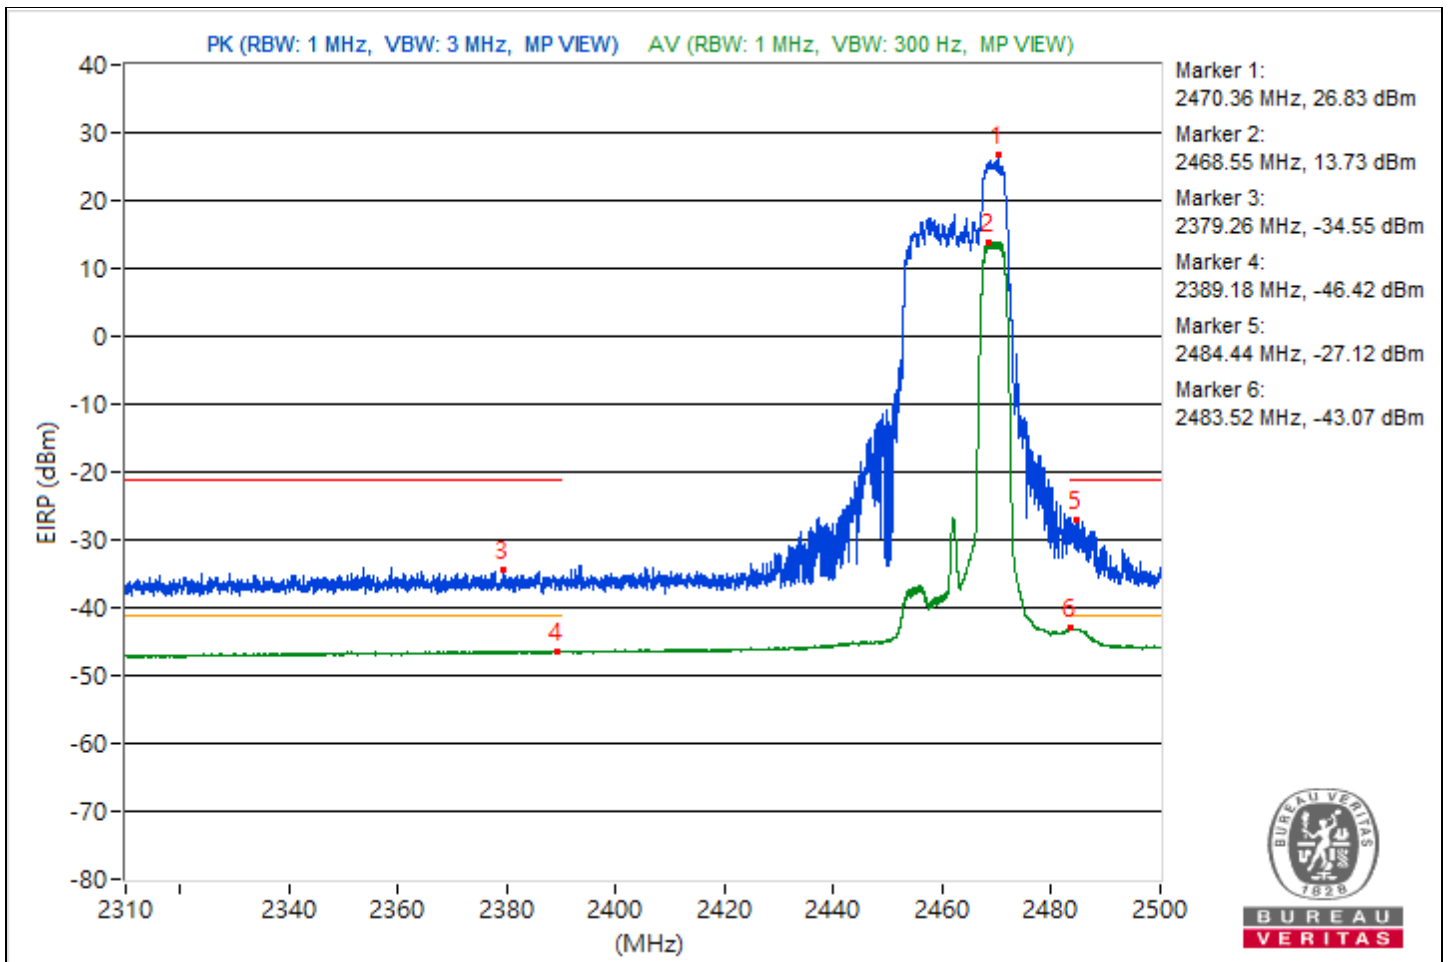


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.37	120.55 PK			19.87	18.15	3.18	25.29
2	*2474.73	108.05 AV			6.86	6.32	3.18	12.79
3	2363.03	60.67 PK	74	-13.33	-39.97	-41.77	3.18	-34.59
4	2386.45	48.76 AV	54	-5.24	-52.97	-52.43	3.18	-46.5
5	2483.5	67.07 PK	74	-6.93	-36.7	-32.88	3.18	-28.19
6	2483.61	51.51 AV	54	-2.49	-49.74	-50.14	3.18	-43.75

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

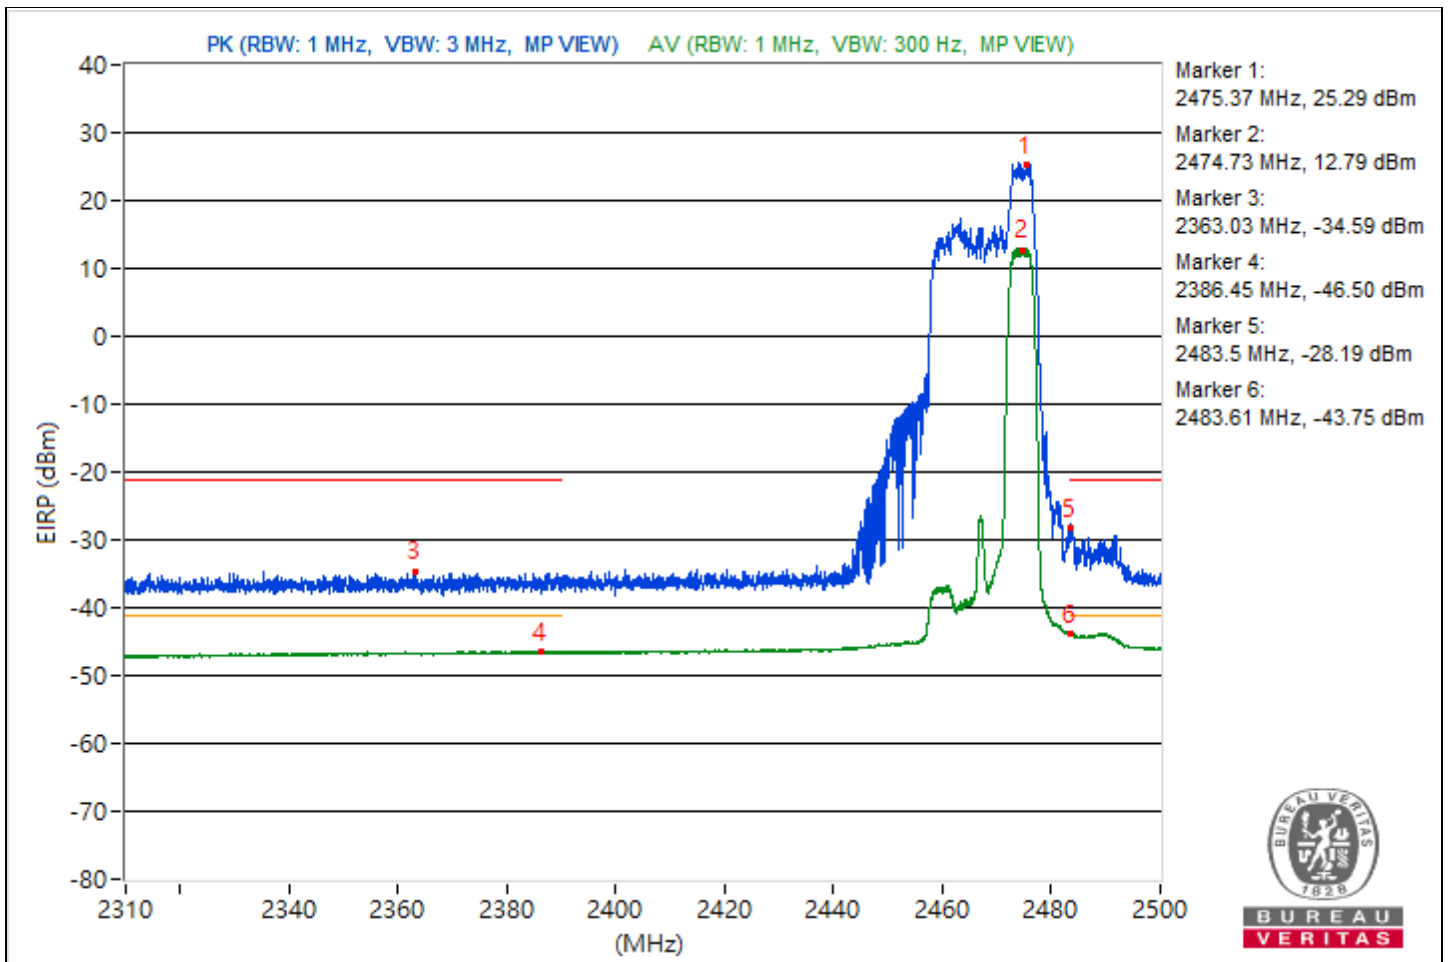




RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2480.41	115.66 PK			11.79	15.76	3.18	20.4
2	*2478.74	103.13 AV			2.04	1.29	3.18	7.87
3	2368.9	60.24 PK	74	-13.76	-43.85	-39.59	3.18	-35.02
4	2387.31	48.73 AV	54	-5.27	-52.82	-52.63	3.18	-46.53
5	2483.97	71.89 PK	74	-2.11	-32.15	-27.95	3.18	-23.37
6	2483.5	52.57 AV	54	-1.43	-48.82	-48.94	3.18	-42.69

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

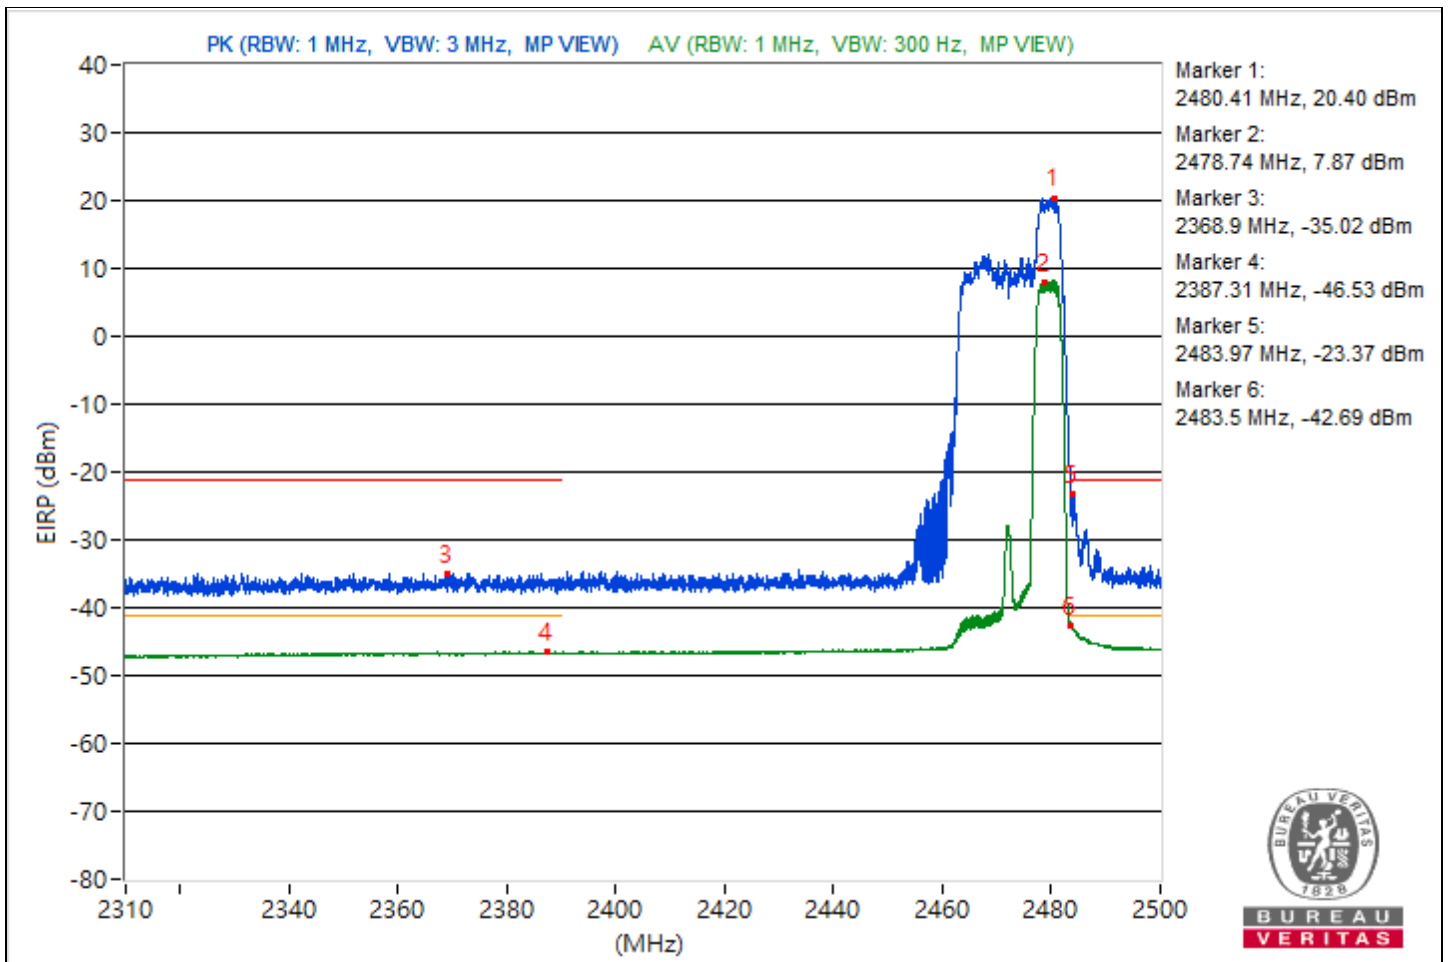


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2407.52	119.09 PK			15.98	18.84	3.18	23.83
2	*2404.29	106.05 AV			4.4	4.8	3.18	10.79
3	2385.86	65.31 PK	74	-8.69	-34.01	-40.49	3.18	-29.95
4	2390	51.16 AV	54	-2.84	-50.28	-50.31	3.18	-44.1
5	2485.99	60.77 PK	74	-13.23	-42.39	-39.46	3.18	-34.49
6	2494.99	49.14 AV	54	-4.86	-52.16	-52.46	3.18	-46.12

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

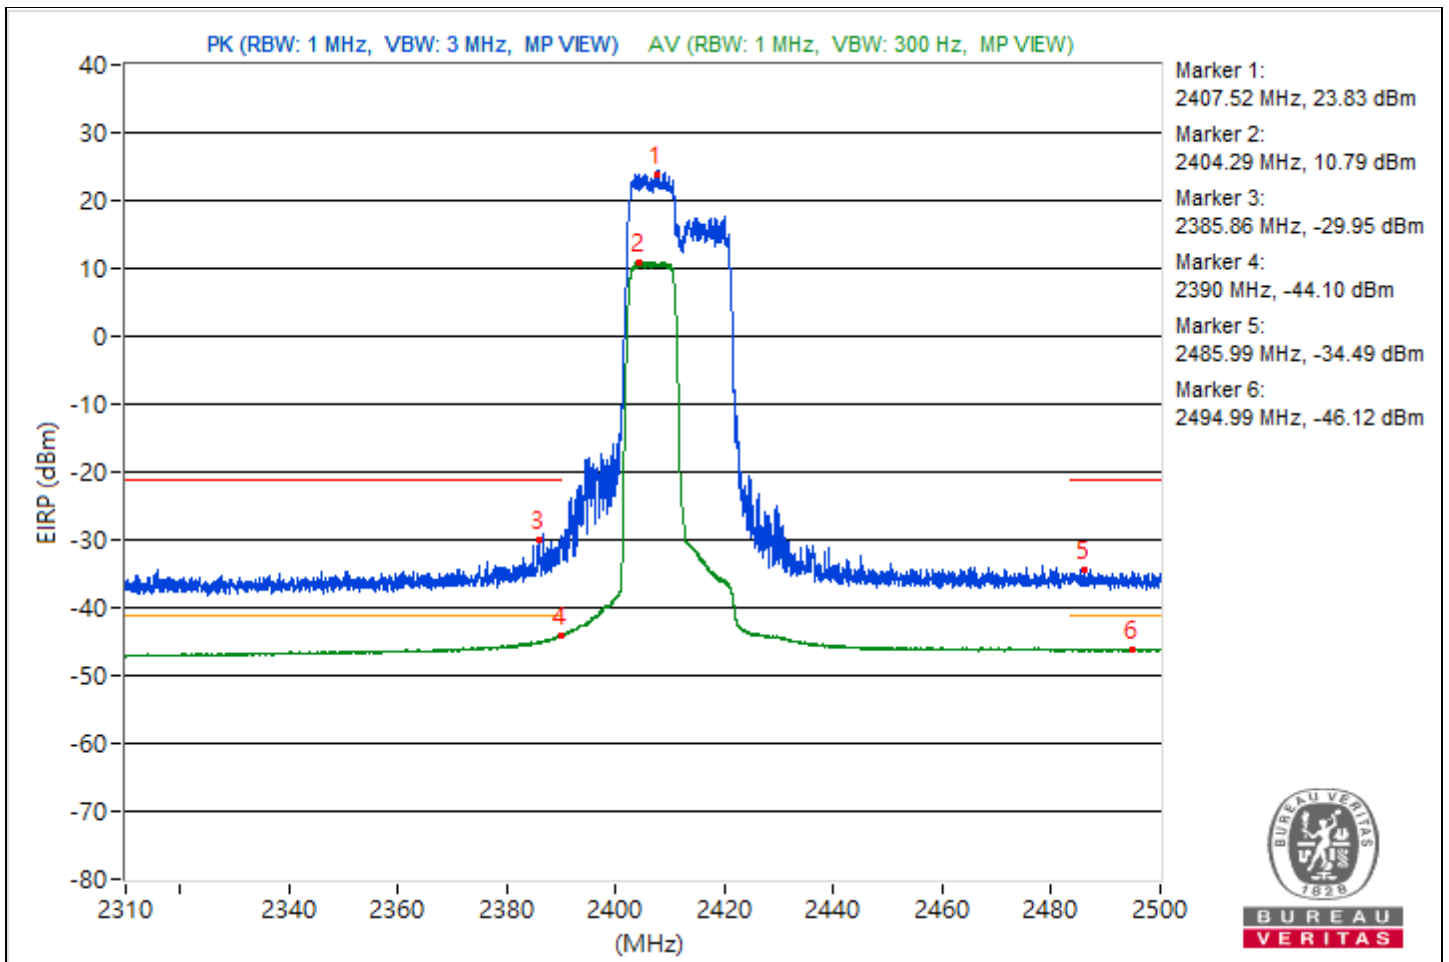


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2432.48	121.91 PK			21.6	18.91	3.18	26.65
2	*2430.39	108.82 AV			7.32	7.42	3.18	13.56
3	2384.31	66.36 PK	74	-7.64	-42.68	-32.48	3.18	-28.9
4	2389.61	49.71 AV	54	-4.29	-51.78	-51.7	3.18	-45.55
5	2484.21	69.2 PK	74	-4.8	-35.36	-30.48	3.18	-26.06
6	2486.8	50.06 AV	54	-3.94	-51.2	-51.59	3.18	-45.2

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

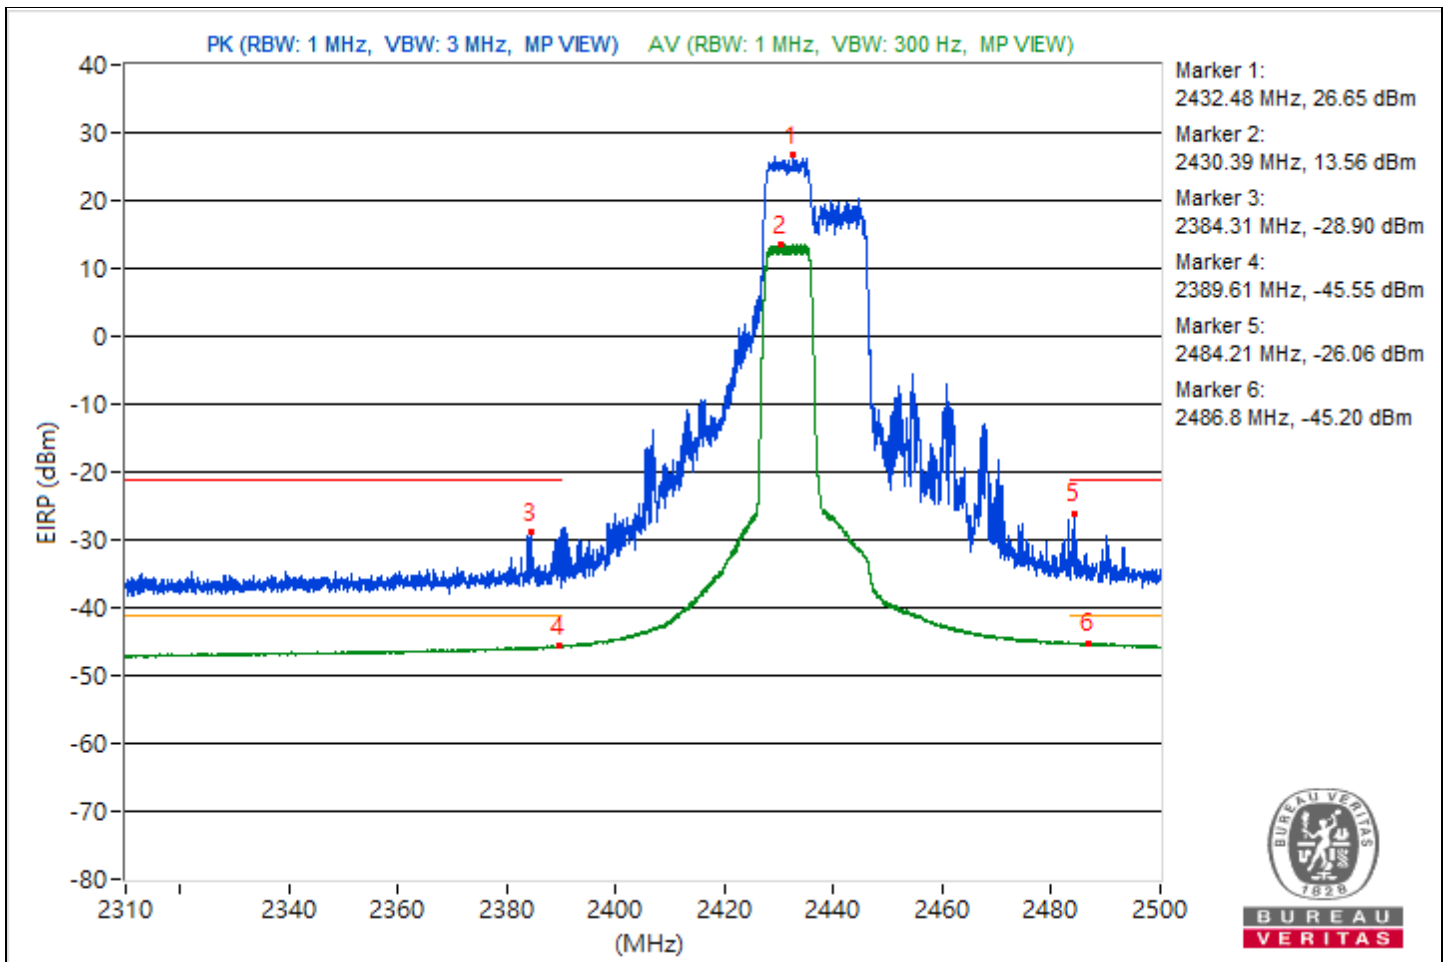


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.36	118.79 PK			15.92	18.41	3.18	23.53
2	*2467.65	105.93 AV			4.29	4.65	3.18	10.67
3	2361.01	60.11 PK	74	-13.89	-40.25	-42.79	3.18	-35.15
4	2388.59	48.88 AV	54	-5.12	-52.69	-52.46	3.18	-46.38
5	2485.68	64.2 PK	74	-9.8	-36.06	-38.9	3.18	-31.06
6	2483.54	51.09 AV	54	-2.91	-50.47	-50.25	3.18	-44.17

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

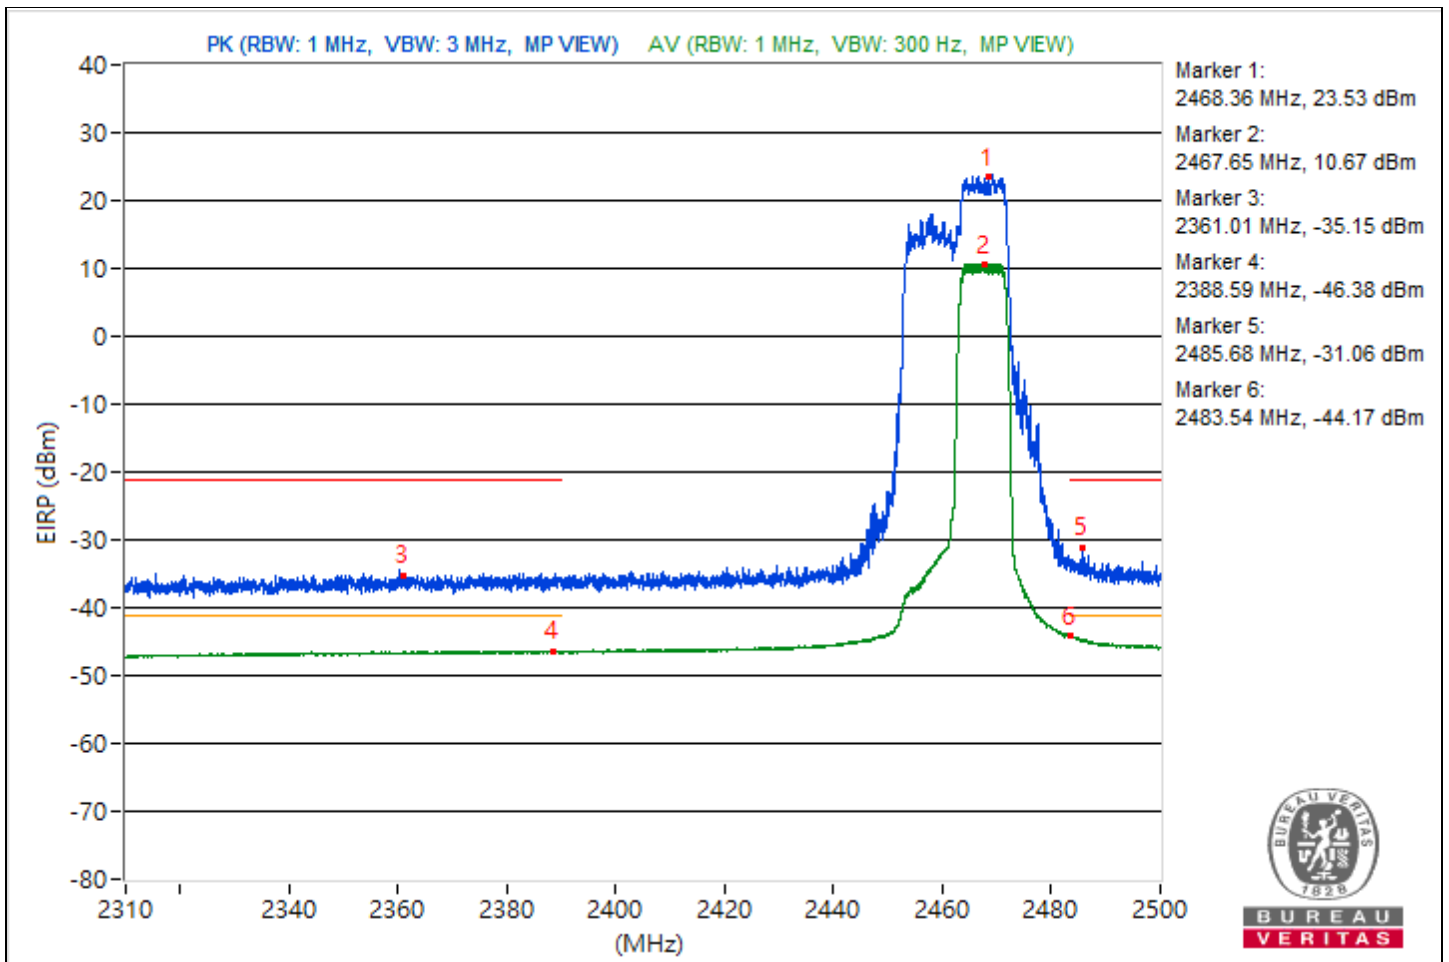


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.57	117.9 PK			14.39	17.84	3.18	22.64
2	*2473.99	105.41 AV			4	3.91	3.18	10.15
3	2357.9	60.36 PK	74	-13.64	-39.61	-43.35	3.18	-34.9
4	2389.63	48.82 AV	54	-5.18	-52.67	-52.59	3.18	-46.44
5	2483.9	66.16 PK	74	-7.84	-33.34	-38.91	3.18	-29.1
6	2483.57	52.41 AV	54	-1.59	-49.07	-49.02	3.18	-42.85

Notes:

1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

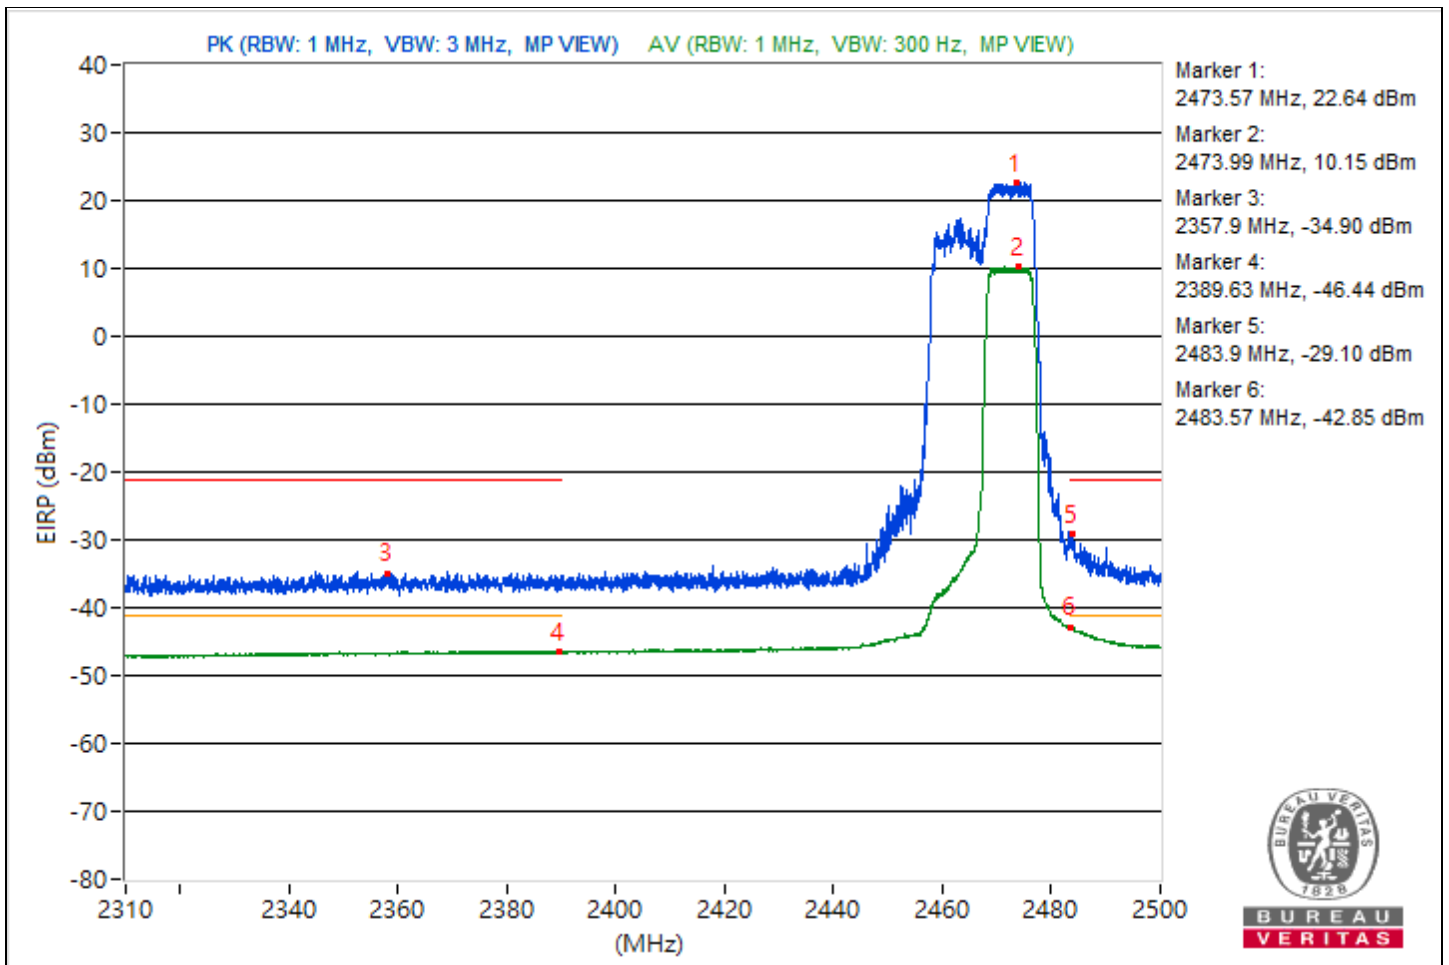


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2475.59	112.88 PK			12.8	9.4	3.18	17.62
2	*2480.17	100.11 AV			-1.45	-1.24	3.18	4.85
3	2388.14	61.02 PK	74	-12.98	-39.76	-41.21	3.18	-34.24
4	2381.25	48.72 AV	54	-5.28	-52.64	-52.83	3.18	-46.54
5	2483.83	69.15 PK	74	-4.85	-32.19	-32.42	3.18	-26.11
6	2483.5	52.79 AV	54	-1.21	-48.55	-48.77	3.18	-42.47

Notes:


1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

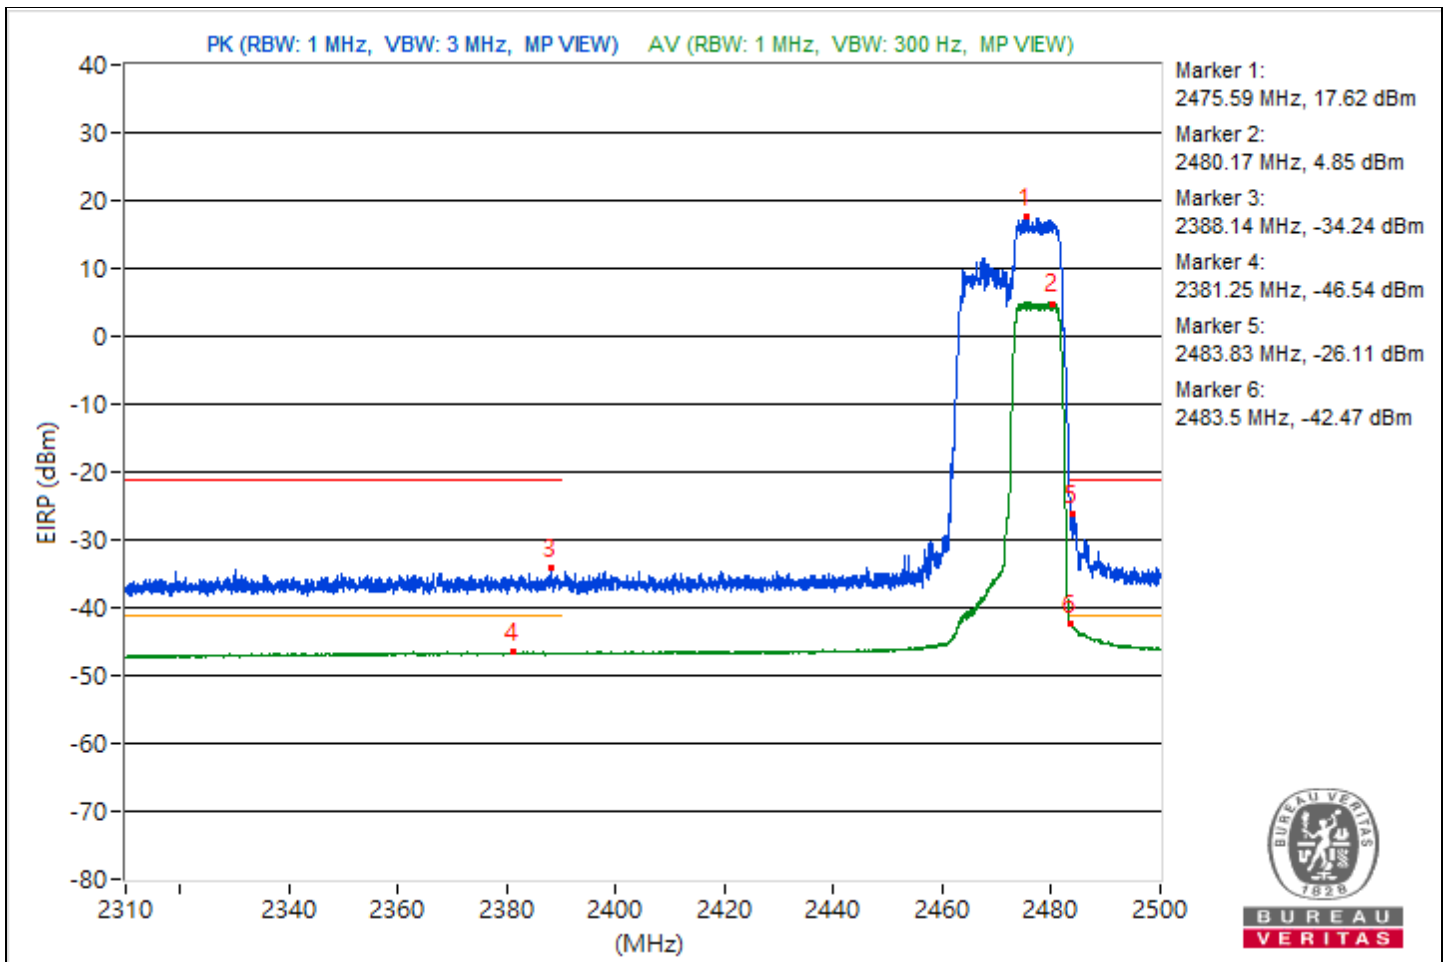

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2407.09	120.66 PK			20.48	17.4	3.18	25.4
2	*2405.5	108.71 AV			7.41	7.1	3.18	13.45
3	2385.74	61.75 PK	74	-12.25	-41.92	-38.23	3.18	-33.51
4	2389.94	50.31 AV	54	-3.69	-51.16	-51.11	3.18	-44.95
5	2486.34	61.1 PK	74	-12.9	-39.7	-41.11	3.18	-34.16
6	2496.41	49.21 AV	54	-4.79	-52.11	-52.37	3.18	-46.05

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

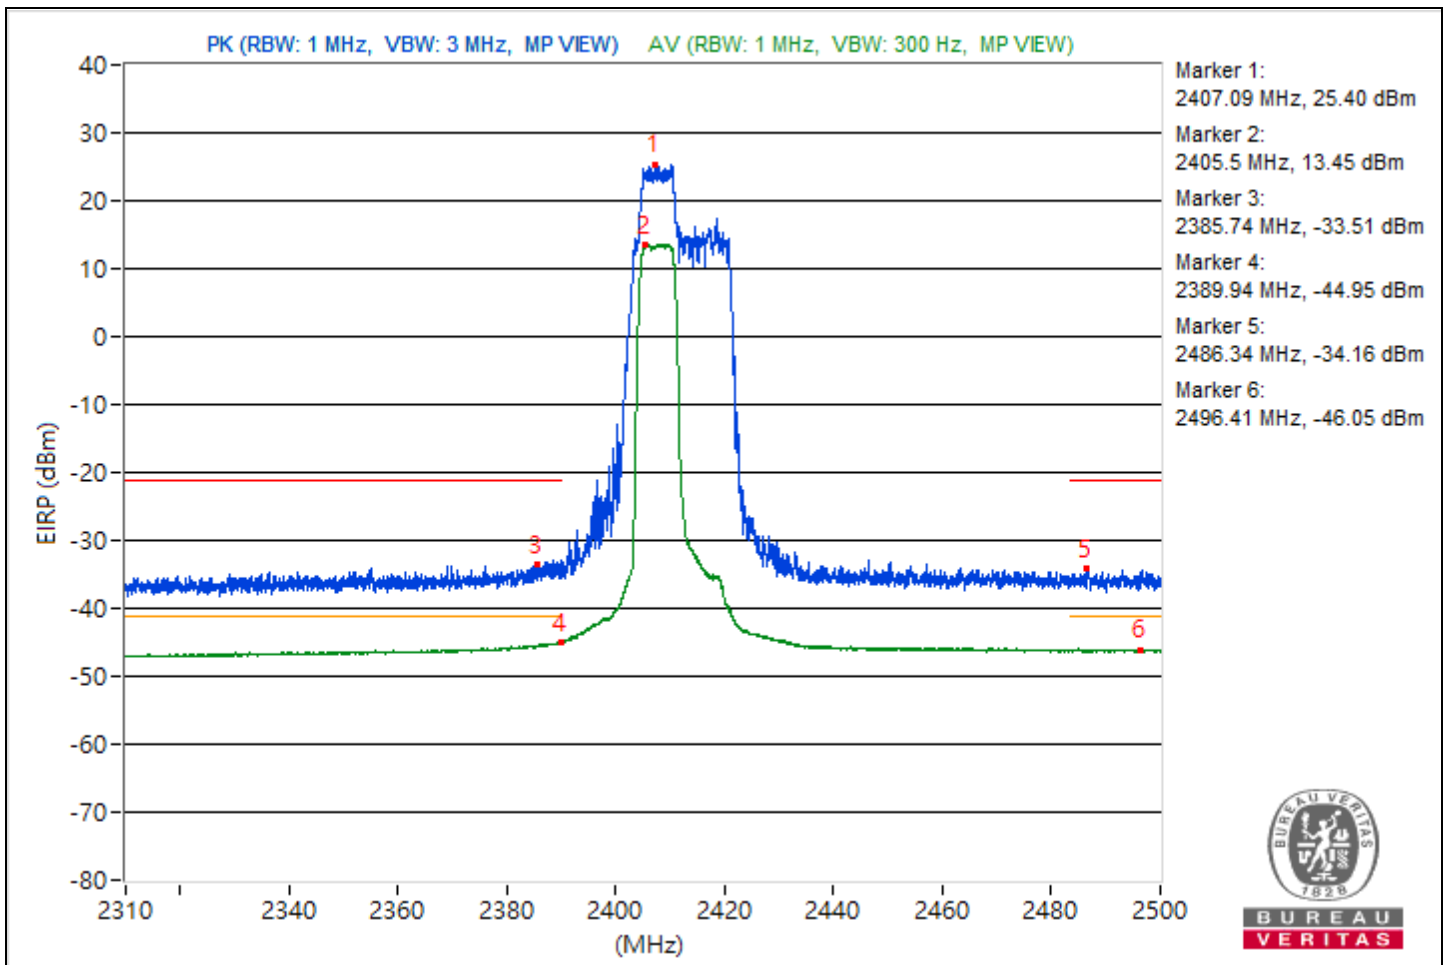


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2432.41	123.42 PK			21.2	22.61	3.18	28.16
2	*2434.43	111.49 AV			9.95	10.12	3.18	16.23
3	2386.52	61.17 PK	74	-12.83	-39.36	-41.48	3.18	-34.09
4	2389.3	49.49 AV	54	-4.51	-52.07	-51.84	3.18	-45.77
5	2488.08	63.08 PK	74	-10.92	-36.5	-41.72	3.18	-32.18
6	2484.35	50.15 AV	54	-3.85	-51.12	-51.49	3.18	-45.11

Notes:

1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

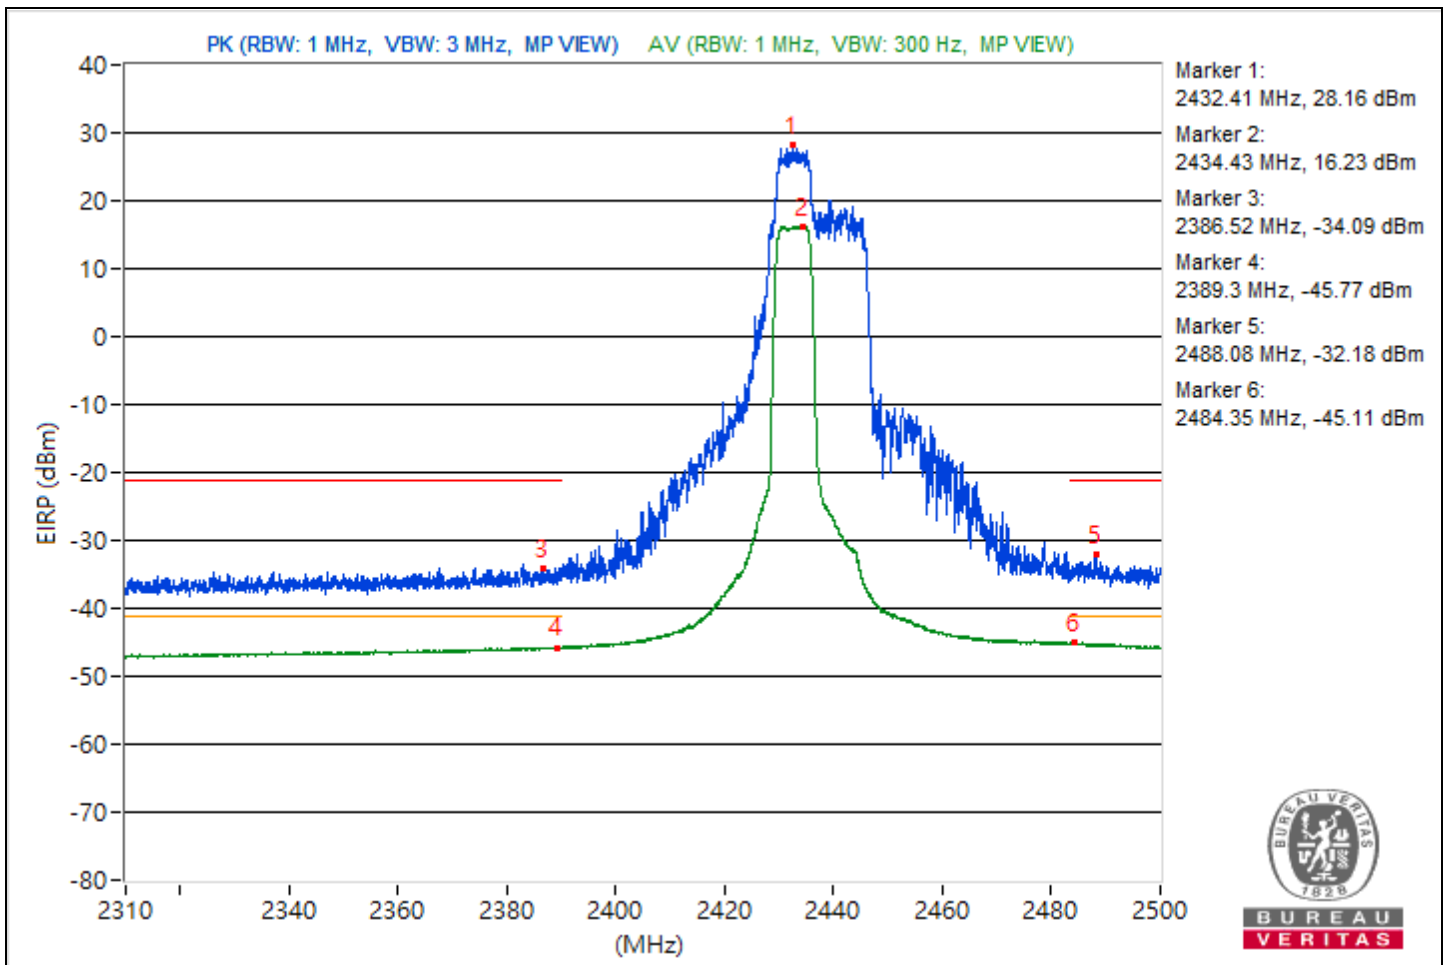




RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.79	121.31 PK			18.61	20.83	3.18	26.05
2	*2464.97	109.64 AV			8.1	8.28	3.18	14.38
3	2382.98	60.81 PK	74	-13.19	-39.42	-42.33	3.18	-34.45
4	2385.69	48.93 AV	54	-5.07	-52.64	-52.41	3.18	-46.33
5	2484.87	63.68 PK	74	-10.32	-35.89	-41.16	3.18	-31.58
6	2483.99	50.45 AV	54	-3.55	-51.05	-50.95	3.18	-44.81

- Notes:
- Margin value = Emission Level - Limit value
  - " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

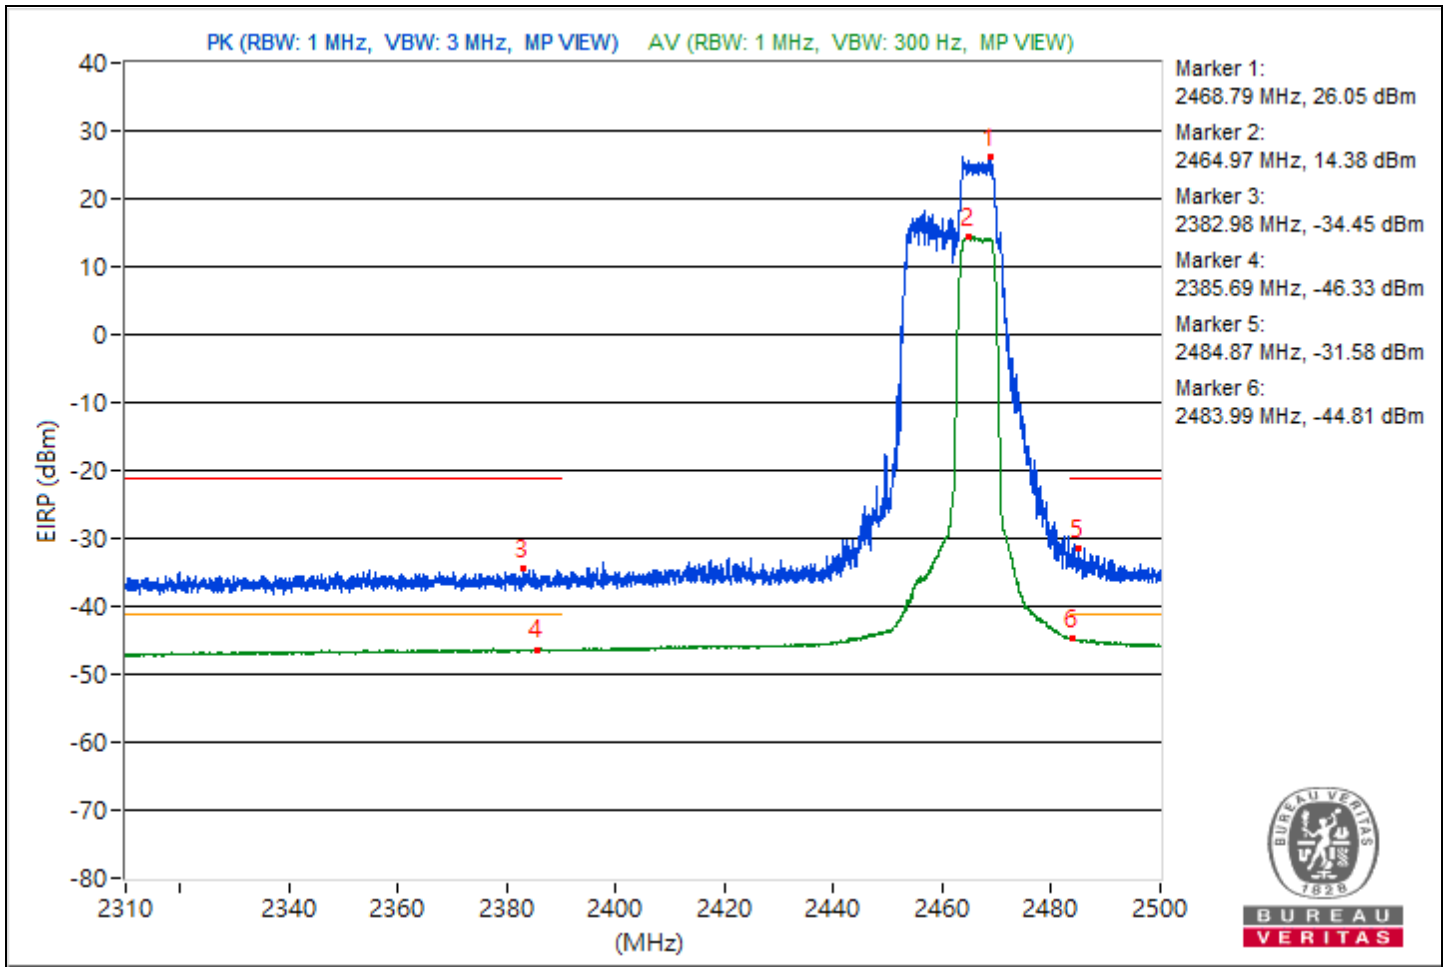


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2469.17	121.15 PK			19.94	19.44	3.18	25.89
2	*2469.62	109.12 AV			7.66	7.68	3.18	13.86
3	2387.14	61.07 PK	74	-12.93	-39.28	-41.86	3.18	-34.19
4	2382.84	48.9 AV	54	-5.1	-52.42	-52.69	3.18	-46.36
5	2485.56	66.6 PK	74	-7.4	-37.02	-33.4	3.18	-28.66
6	2483.5	52.51 AV	54	-1.49	-48.89	-48.99	3.18	-42.75

Notes:


1. Margin value = Emission Level - Limit value
2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

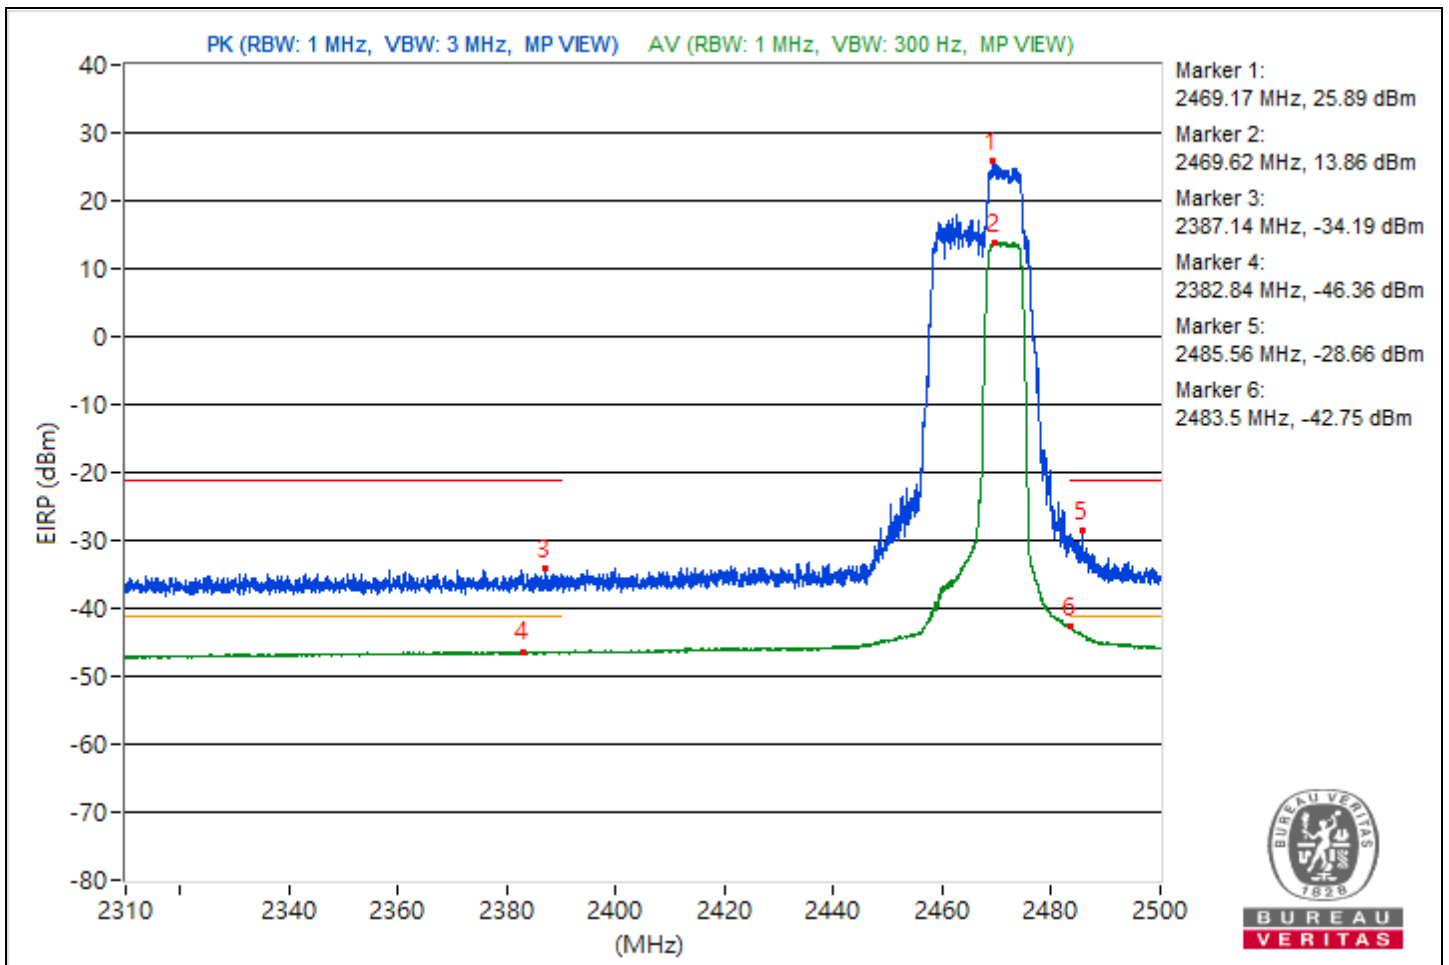

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2478.72	118.03 PK			17.56	15.3	3.18	22.77
2	*2475.42	106.61 AV			5.22	5.11	3.18	11.35
3	2364.72	61.85 PK	74	-12.15	-41.69	-38.19	3.18	-33.41
4	2371.01	48.8 AV	54	-5.2	-52.54	-52.76	3.18	-46.46
5	2484.49	68.76 PK	74	-5.24	-34.99	-31.2	3.18	-26.5
6	2483.5	53.13 AV	54	-0.87	-48.37	-48.27	3.18	-42.13


- Notes:
- Margin value = Emission Level - Limit value
  - " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

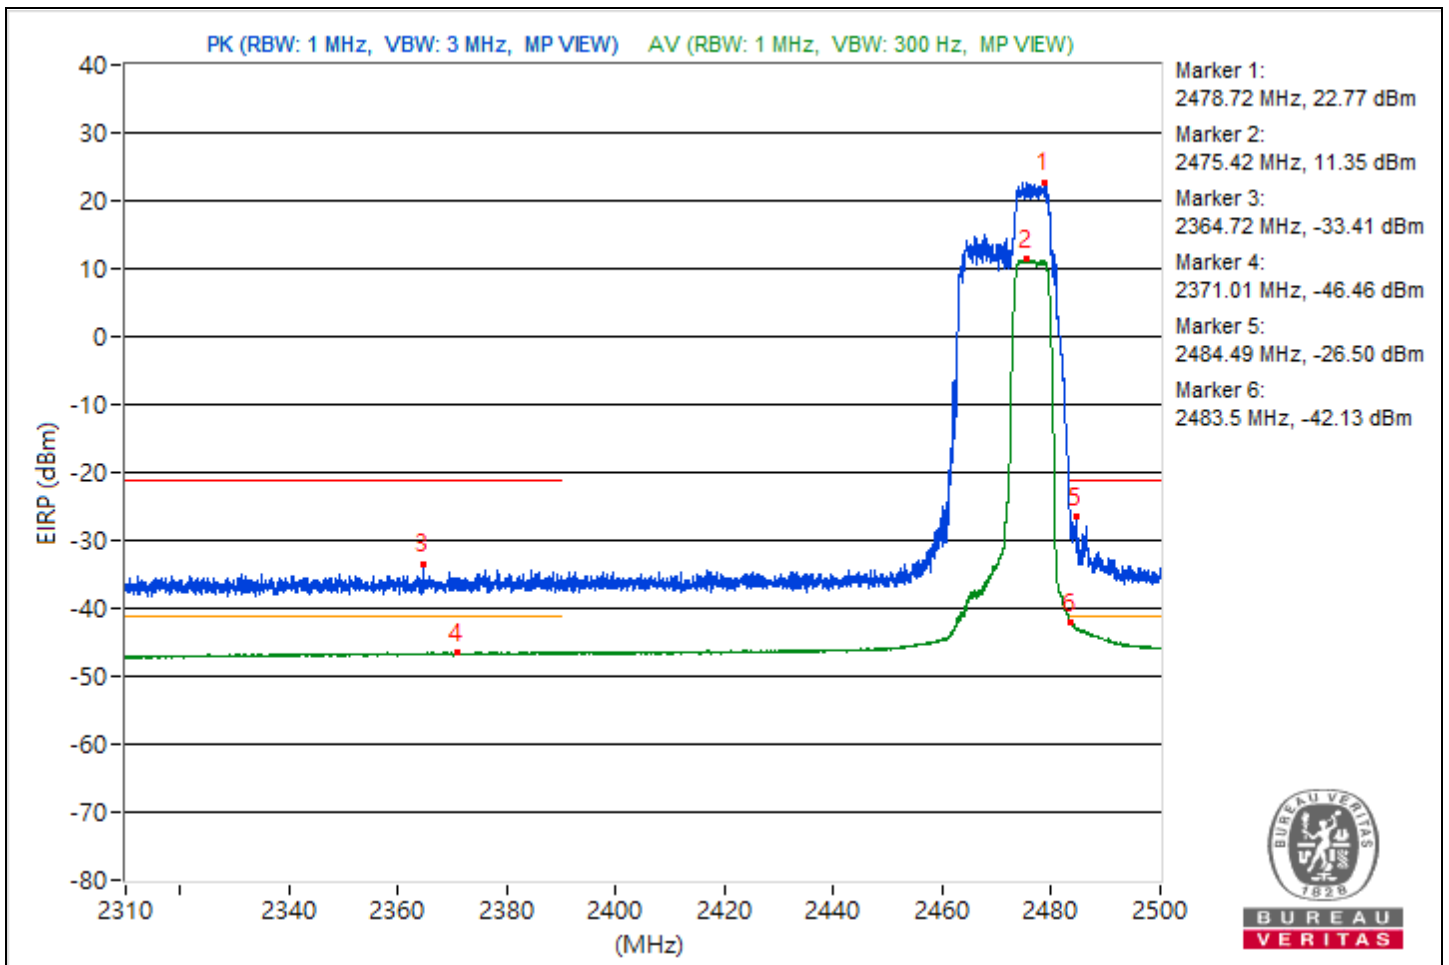

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2410.39	118.45 PK			17.81	16	3.18	23.19
2	*2410.94	106.41 AV			4.81	5.1	3.18	11.15
3	2389.8	69.8 PK	74	-4.2	-33.85	-30.19	3.18	-25.46
4	2389.78	50.74 AV	54	-3.26	-50.79	-50.64	3.18	-44.52
5	2497.41	61.14 PK	74	-12.86	-39.12	-41.95	3.18	-34.12
6	2498.43	49.19 AV	54	-4.81	-52.12	-52.39	3.18	-46.07


- Notes:
- Margin value = Emission Level - Limit value
  - " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

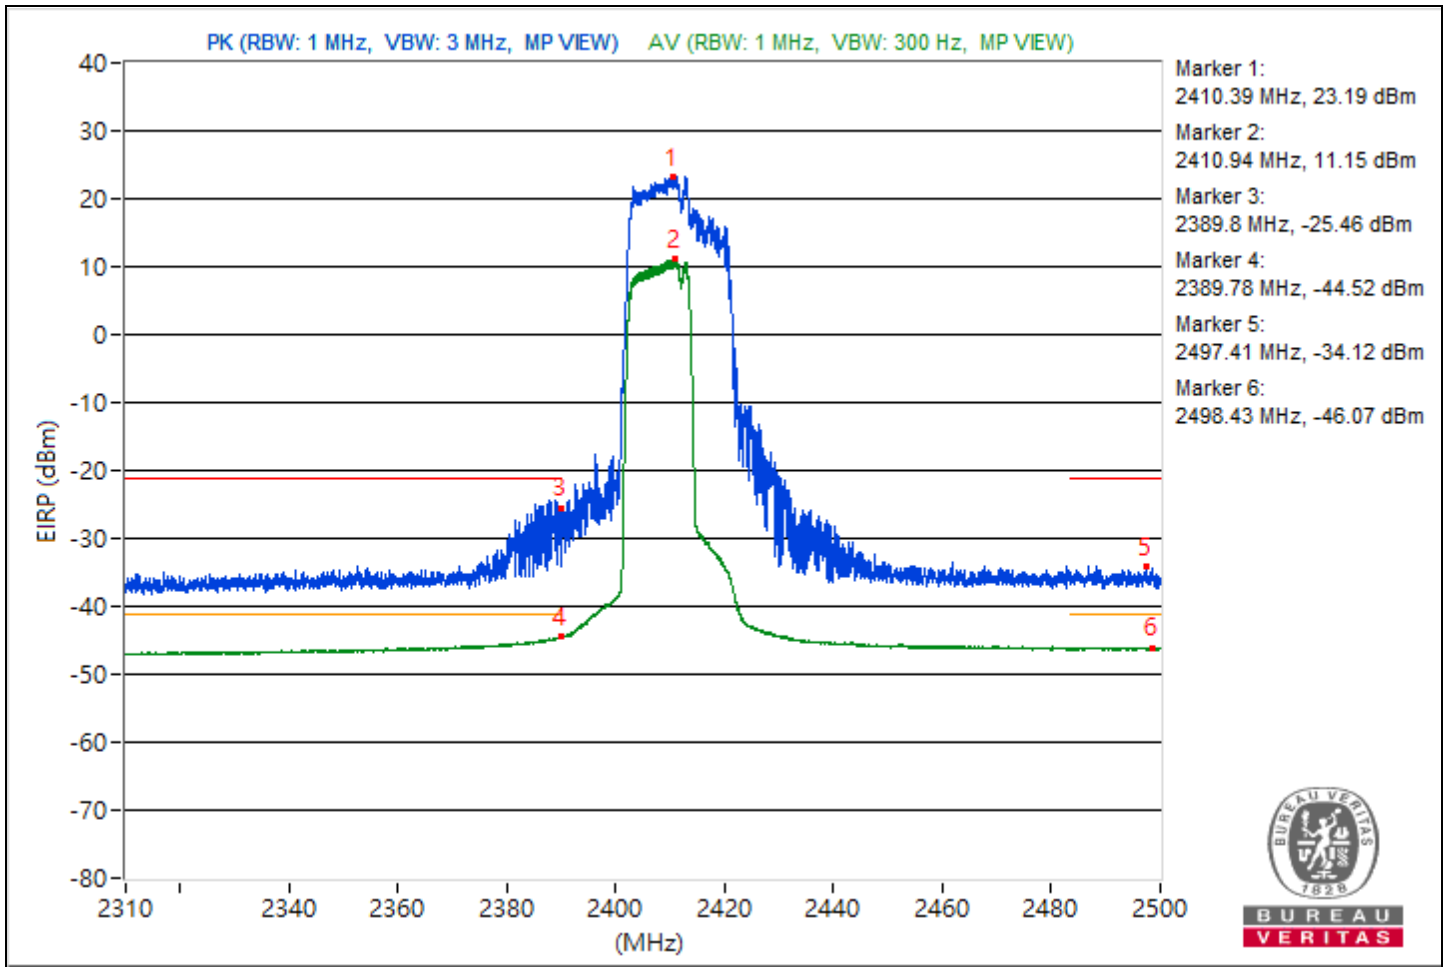

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2434.38	121.52 PK			19	20.92	3.18	26.26
2	*2435.78	109.07 AV			7.7	7.53	3.18	13.81
3	2388.61	63.69 PK	74	-10.31	-36.9	-38.84	3.18	-31.57
4	2389.75	50.09 AV	54	-3.91	-51.49	-51.22	3.18	-45.17
5	2484.56	64.6 PK	74	-9.4	-36.53	-37.19	3.18	-30.66
6	2483.66	50.48 AV	54	-3.52	-51.11	-50.84	3.18	-44.78


- Notes:
- Margin value = Emission Level - Limit value
  - " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

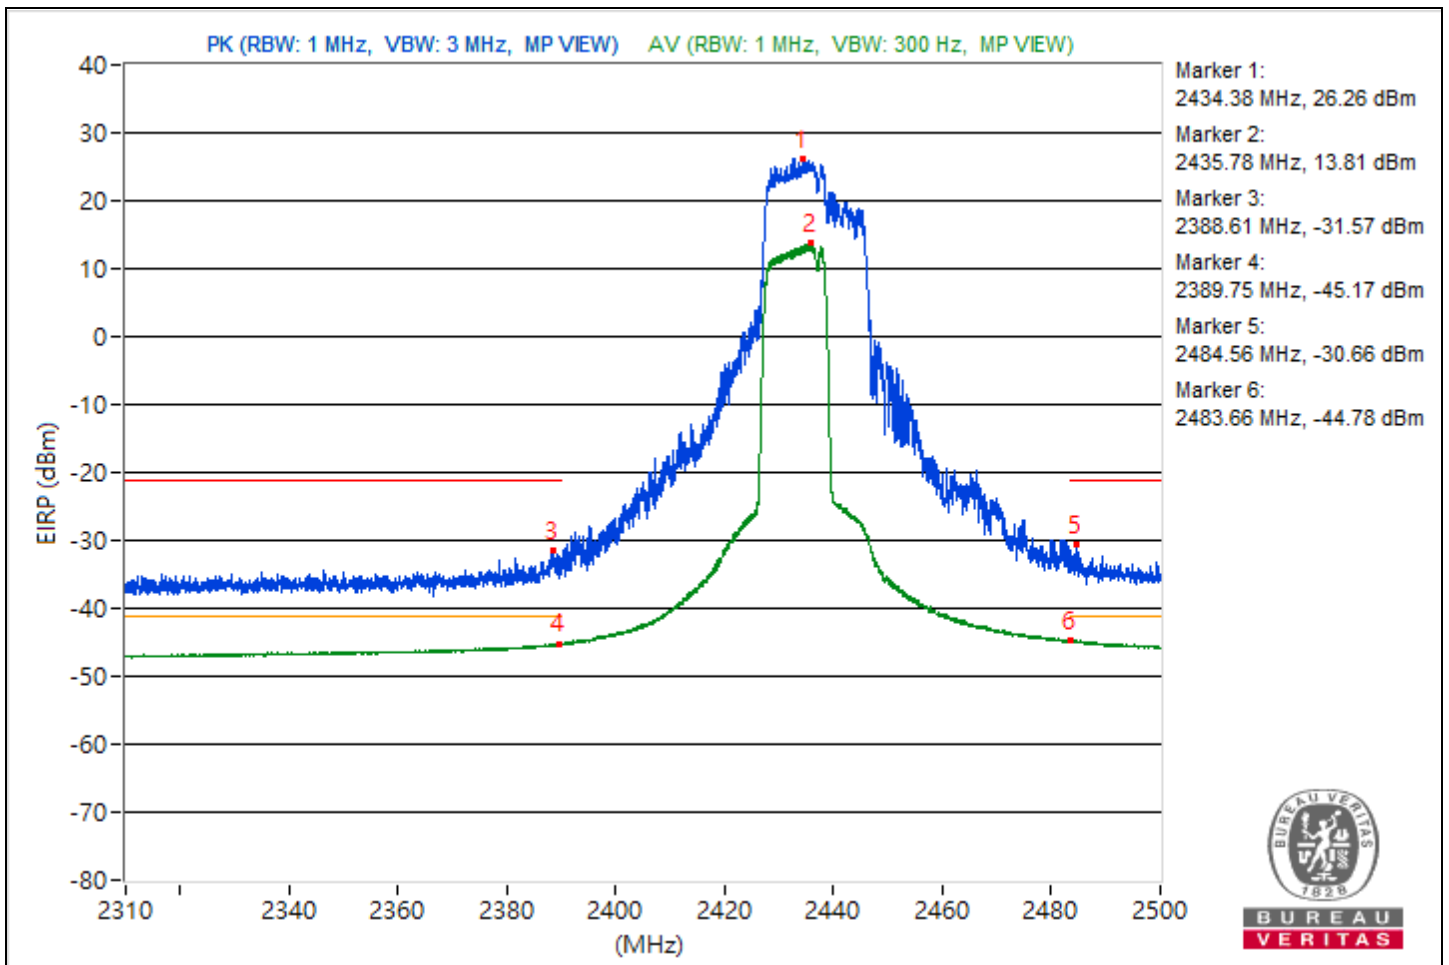

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2463.12	119.65 PK			17.09	19.09	3.18	24.39
2	*2462.88	106.57 AV			5.4	4.8	3.18	11.31
3	2357.38	60.65 PK	74	-13.35	-42.64	-39.51	3.18	-34.61
4	2389.44	48.86 AV	54	-5.14	-52.76	-52.43	3.18	-46.4
5	2486.27	61.99 PK	74	-12.01	-38.43	-40.8	3.18	-33.27
6	2483.68	50.58 AV	54	-3.42	-50.91	-50.84	3.18	-44.68

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

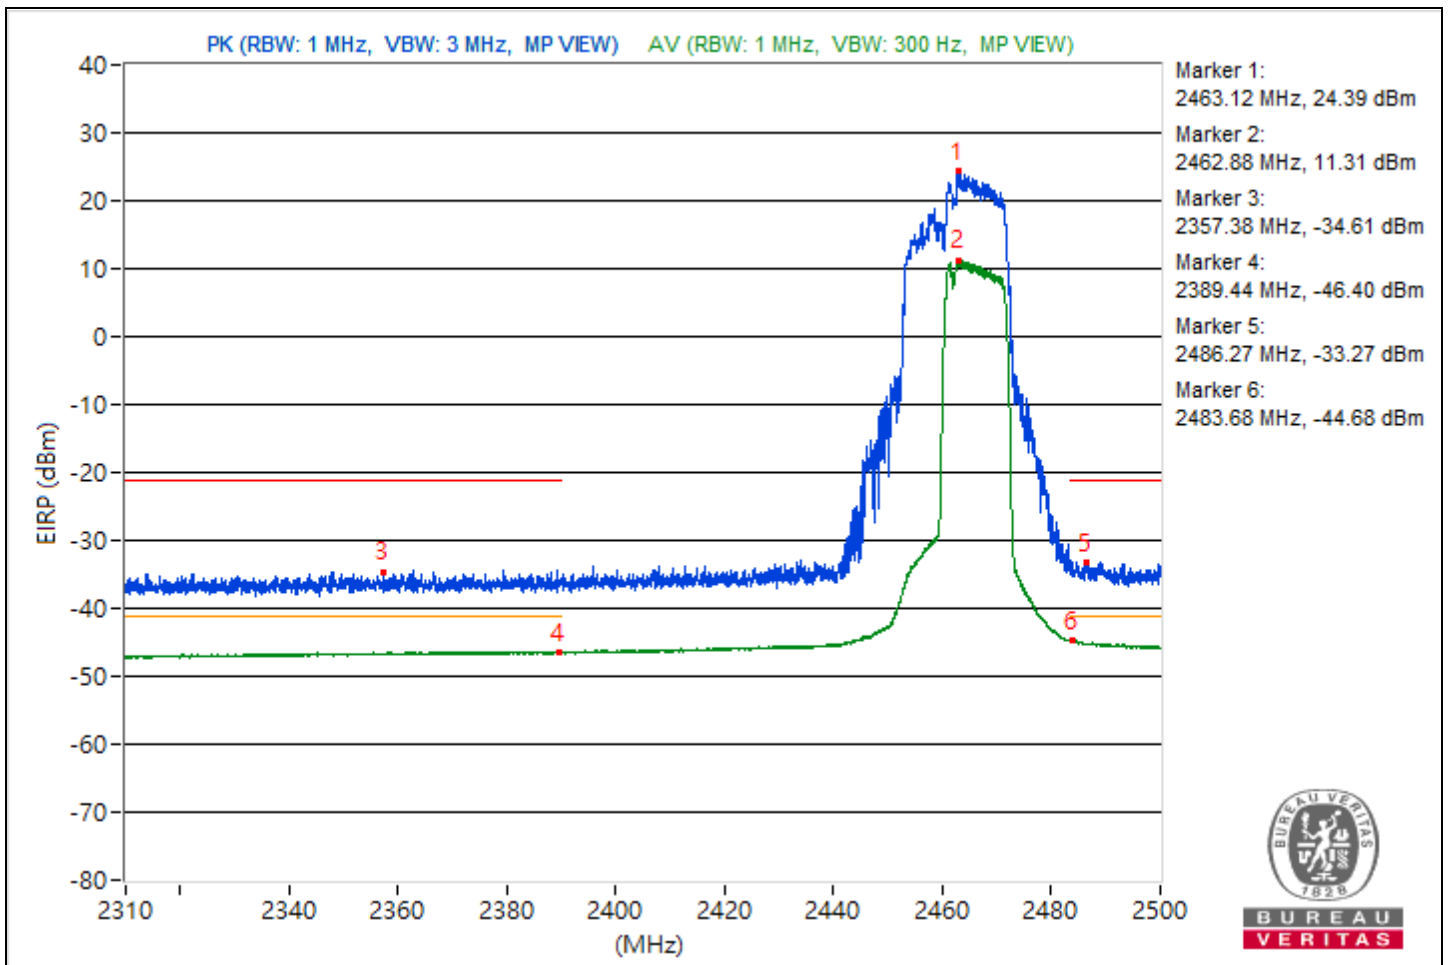


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2468.44	118.35 PK			17.13	16.67	3.18	23.09
2	*2468.15	105.65 AV			4.16	4.23	3.18	10.39
3	2355.72	60.77 PK	74	-13.23	-38.88	-43.8	3.18	-34.49
4	2387.47	48.91 AV	54	-5.09	-52.6	-52.48	3.18	-46.35
5	2483.61	66.99 PK	74	-7.01	-32.9	-36.93	3.18	-28.27
6	2483.78	51.74 AV	54	-2.26	-49.85	-49.58	3.18	-43.52

Notes:


1. Margin value = Emission Level - Limit value
2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

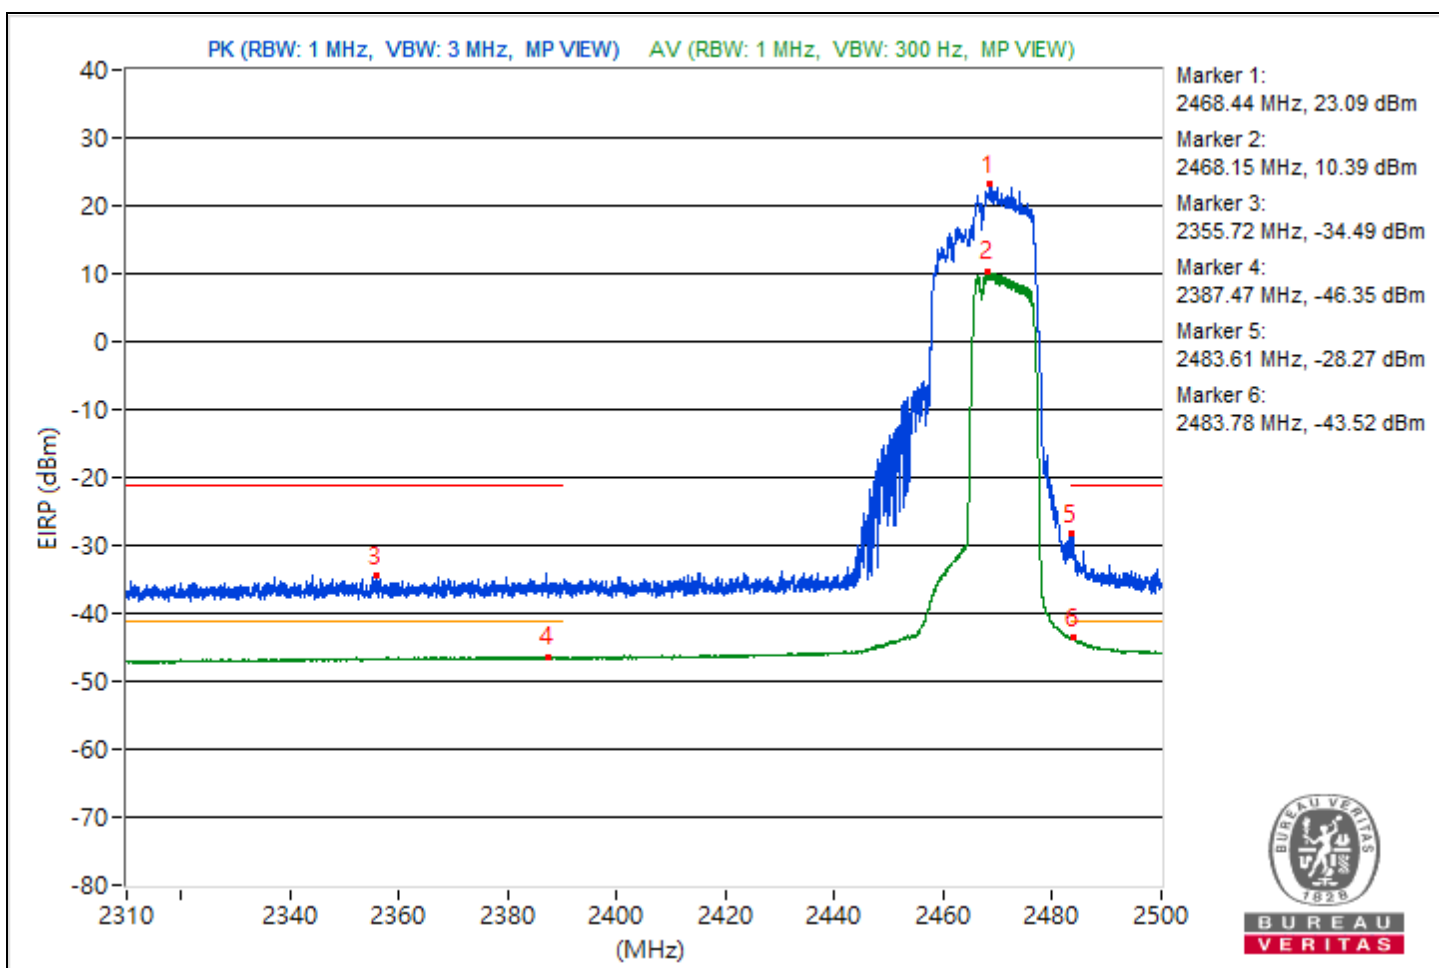

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	2.31 GHz ~ 2.5 GHz	Environmental Conditions	25°C, 76% RH
Tested By	Waydi Tuan		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*2473.9	116.83 PK			15.19	15.56	3.18	21.57
2	*2473.33	102.73 AV			1.08	1.47	3.18	7.47
3	2364.48	60.5 PK	74	-13.5	-42.38	-39.87	3.18	-34.76
4	2380.42	48.71 AV	54	-5.29	-52.89	-52.61	3.18	-46.55
5	2483.68	70.55 PK	74	-3.45	-30.94	-30.85	3.18	-24.71
6	2483.66	52.63 AV	54	-1.37	-48.75	-48.89	3.18	-42.63

- Notes:
1. Margin value = Emission Level - Limit value
  2. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

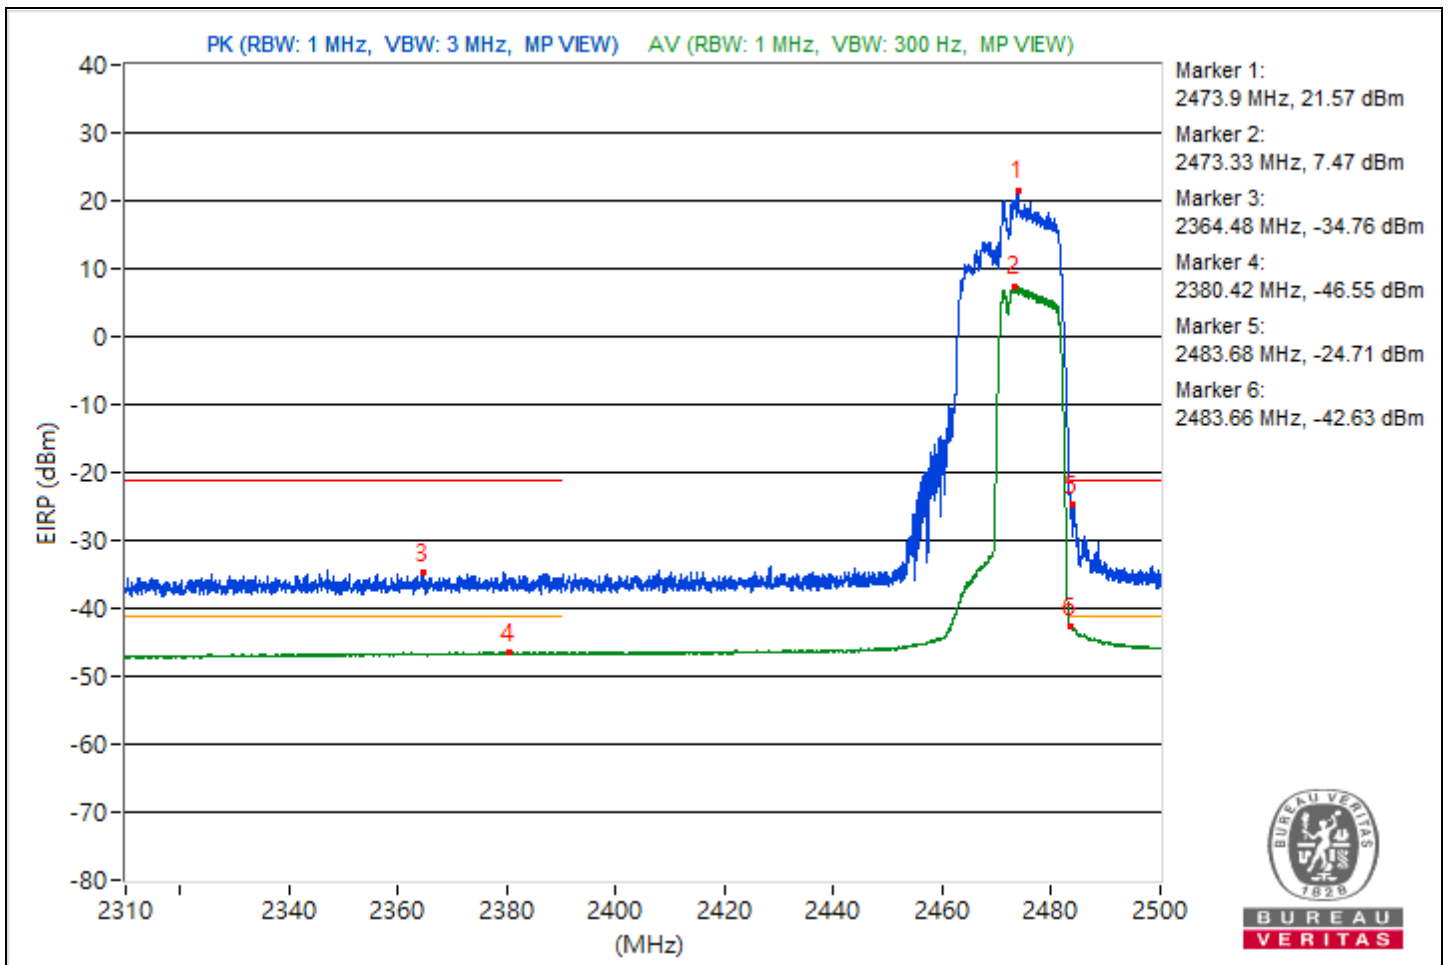




**Mode B**  
**For 1TX**

<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.9 PK	74.0	-33.1	1.80 H	270	36.4	4.5
2	4824.00	30.8 AV	54.0	-23.2	1.80 H	270	26.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

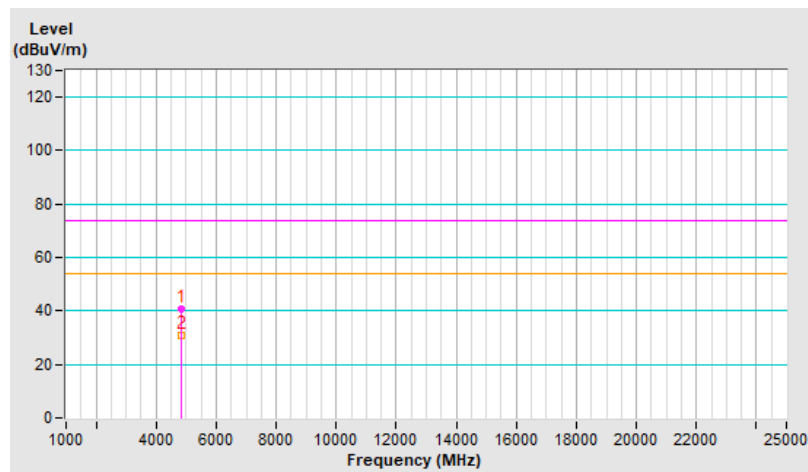


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.9 PK	74.0	-32.1	2.39 V	270	37.4	4.5
2	4824.00	30.7 AV	54.0	-23.3	2.39 V	270	26.2	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

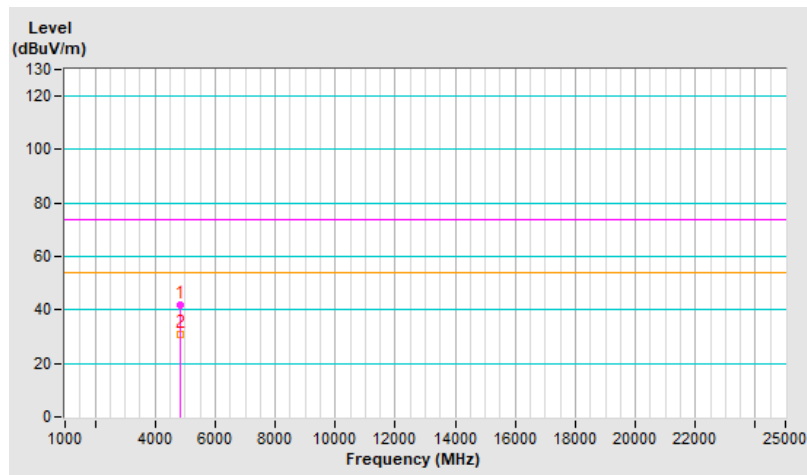


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.6 PK	74.0	-31.4	1.73 H	277	38.1	4.5
2	4874.00	30.8 AV	54.0	-23.2	1.73 H	277	26.3	4.5
3	7311.00	45.0 PK	74.0	-29.0	2.42 H	281	33.5	11.5
4	7311.00	33.8 AV	54.0	-20.2	2.42 H	281	22.3	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

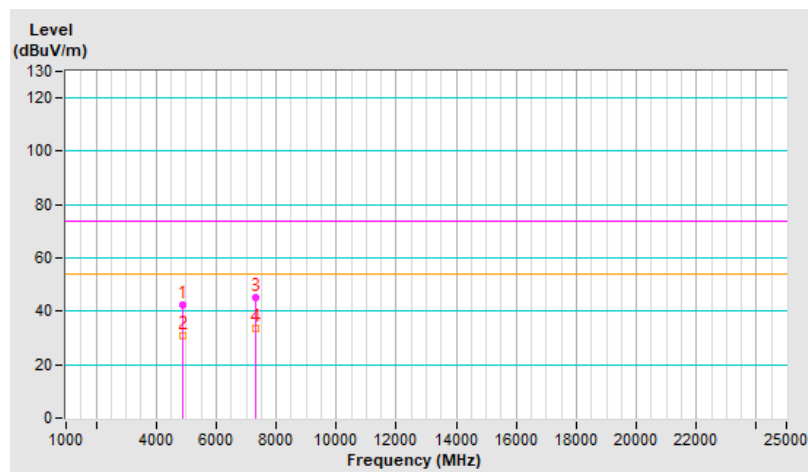




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.2 PK	74.0	-32.8	2.44 V	263	36.7	4.5
2	4874.00	30.1 AV	54.0	-23.9	2.44 V	263	25.6	4.5
3	7311.00	45.1 PK	74.0	-28.9	2.06 V	248	33.6	11.5
4	7311.00	33.8 AV	54.0	-20.2	2.06 V	248	22.3	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

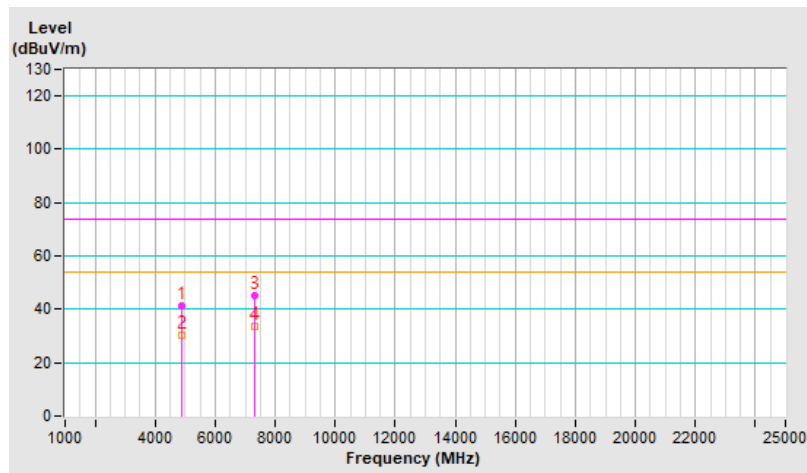




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	1.76 H	272	37.8	4.6
2	4924.00	30.6 AV	54.0	-23.4	1.76 H	272	26.0	4.6
3	7386.00	44.9 PK	74.0	-29.1	2.39 H	303	32.9	12.0
4	7386.00	33.8 AV	54.0	-20.2	2.39 H	303	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

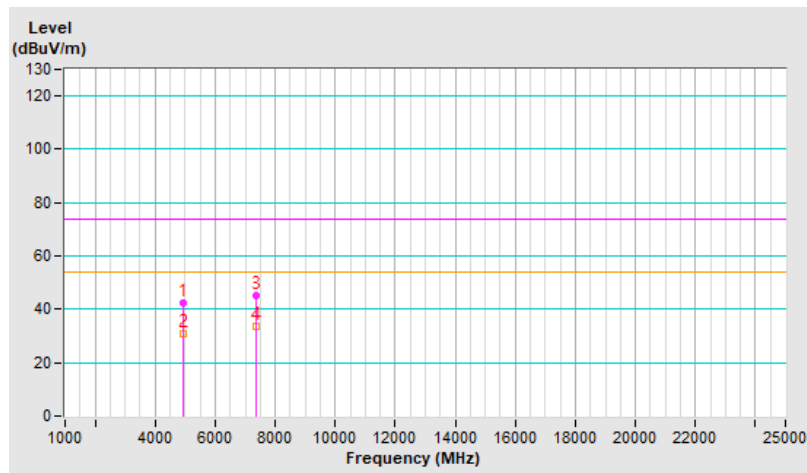


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.4 PK	74.0	-32.6	2.40 V	281	36.8	4.6
2	4924.00	29.9 AV	54.0	-24.1	2.40 V	281	25.3	4.6
3	7386.00	44.9 PK	74.0	-29.1	2.06 V	243	32.9	12.0
4	7386.00	33.3 AV	54.0	-20.7	2.06 V	243	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

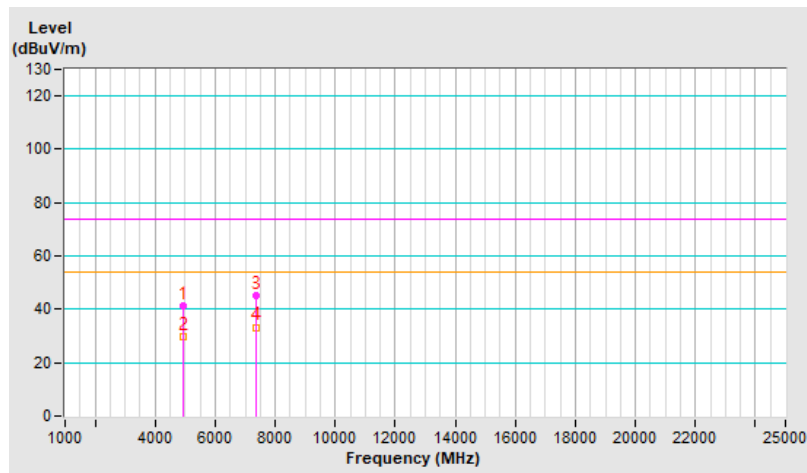




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.6 PK	74.0	-31.4	1.68 H	251	38.0	4.6
2	4934.00	30.9 AV	54.0	-23.1	1.68 H	251	26.3	4.6
3	7401.00	45.2 PK	74.0	-28.8	2.46 H	300	33.2	12.0
4	7401.00	33.9 AV	54.0	-20.1	2.46 H	300	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

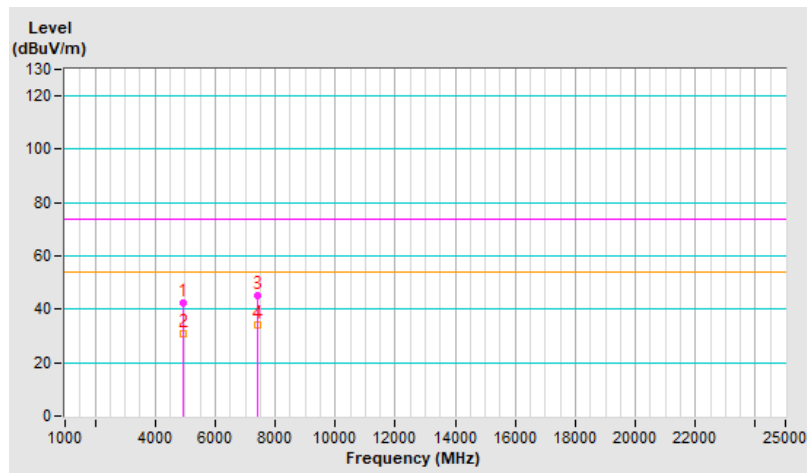




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.8 PK	74.0	-31.2	2.49 V	275	38.2	4.6
2	4934.00	31.0 AV	54.0	-23.0	2.49 V	275	26.4	4.6
3	7401.00	44.7 PK	74.0	-29.3	1.98 V	230	32.7	12.0
4	7401.00	33.5 AV	54.0	-20.5	1.98 V	230	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

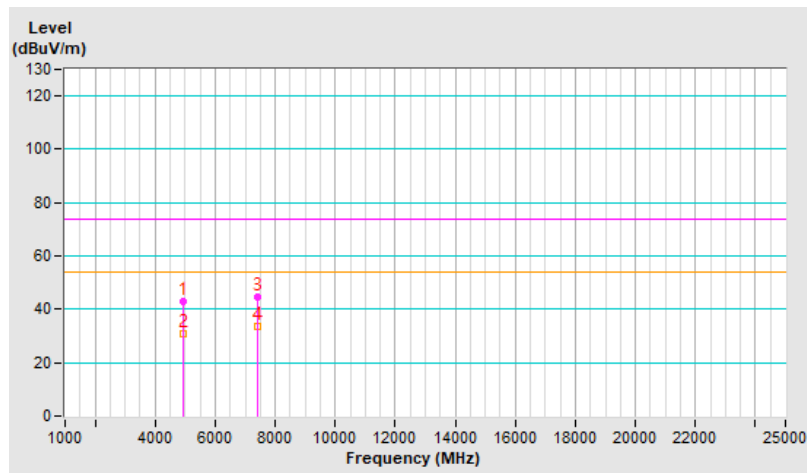






<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.5 PK	74.0	-31.5	1.71 H	260	37.8	4.7
2	4944.00	30.7 AV	54.0	-23.3	1.71 H	260	26.0	4.7
3	7416.00	44.6 PK	74.0	-29.4	2.50 H	302	32.6	12.0
4	7416.00	33.5 AV	54.0	-20.5	2.50 H	302	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

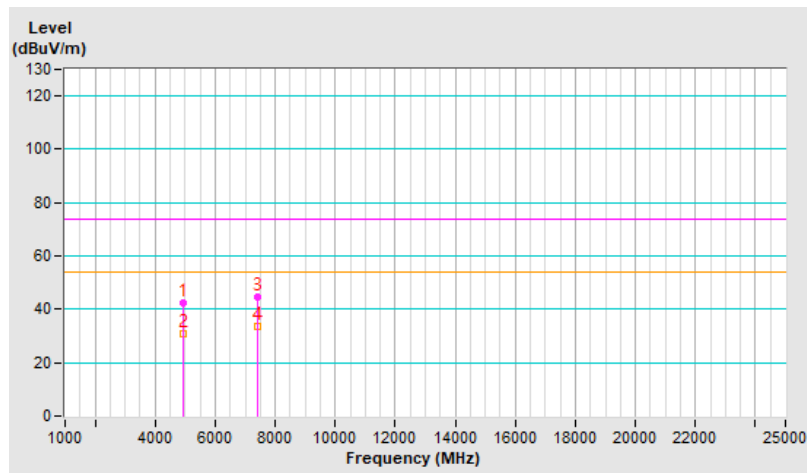


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	2.40 V	277	36.7	4.7
2	4944.00	30.1 AV	54.0	-23.9	2.40 V	277	25.4	4.7
3	7416.00	44.1 PK	74.0	-29.9	2.06 V	244	32.1	12.0
4	7416.00	33.1 AV	54.0	-20.9	2.06 V	244	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

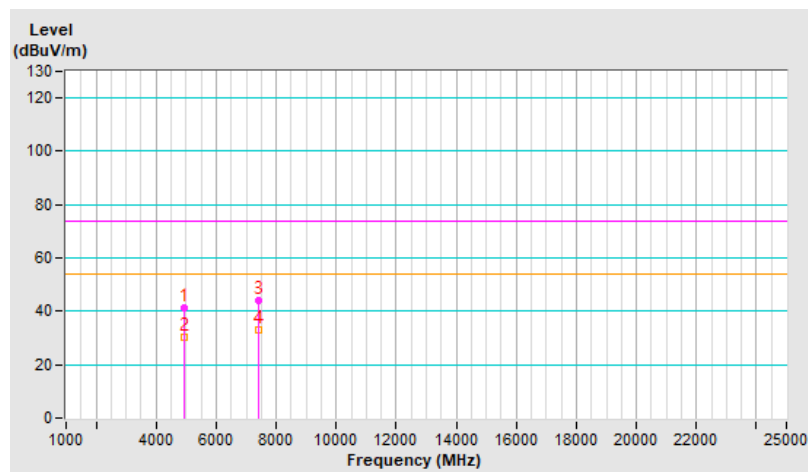




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.7 PK	74.0	-33.3	1.78 H	264	36.2	4.5
2	4824.00	31.1 AV	54.0	-22.9	1.78 H	264	26.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

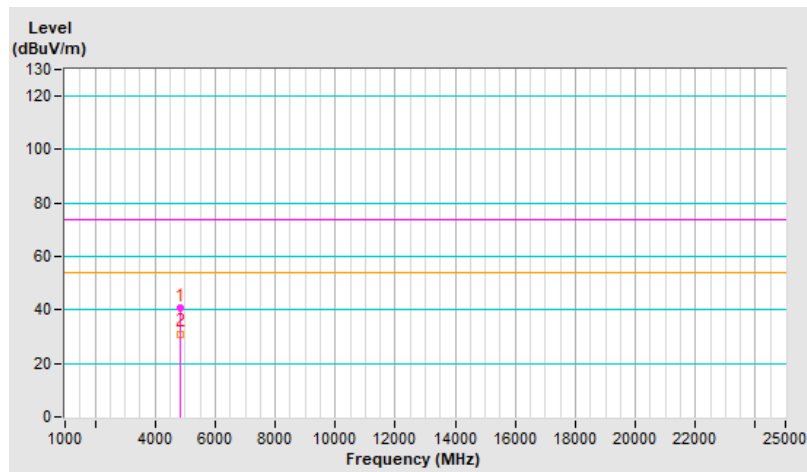




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.3 PK	74.0	-32.7	2.32 V	250	36.8	4.5
2	4824.00	30.1 AV	54.0	-23.9	2.32 V	250	25.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

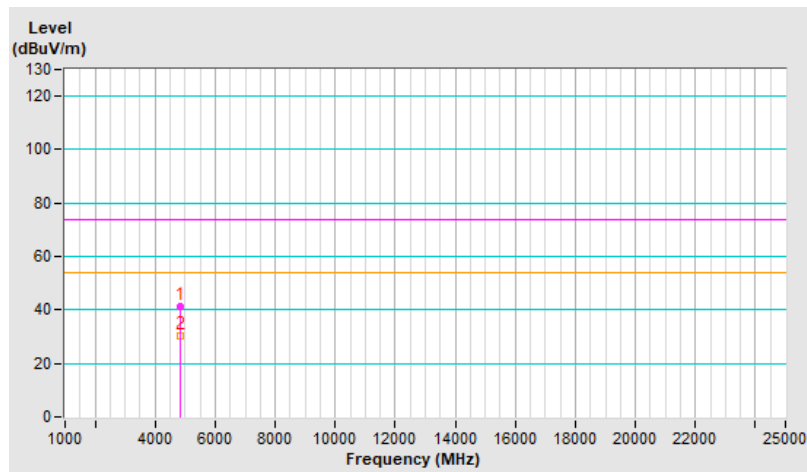


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.9 PK	74.0	-32.1	1.77 H	244	37.4	4.5
2	4874.00	30.2 AV	54.0	-23.8	1.77 H	244	25.7	4.5
3	7311.00	44.4 PK	74.0	-29.6	2.47 H	277	32.9	11.5
4	7311.00	33.1 AV	54.0	-20.9	2.47 H	277	21.6	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

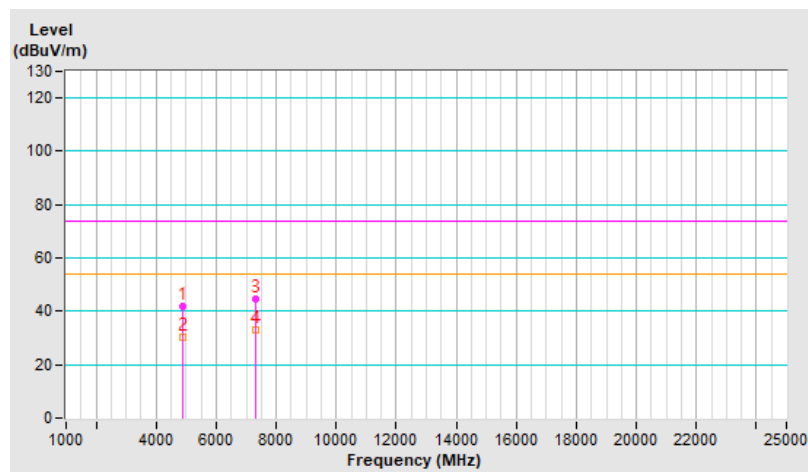




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.3 PK	74.0	-31.7	2.47 V	288	37.8	4.5
2	4874.00	30.4 AV	54.0	-23.6	2.47 V	288	25.9	4.5
3	7311.00	44.6 PK	74.0	-29.4	2.01 V	252	33.1	11.5
4	7311.00	33.5 AV	54.0	-20.5	2.01 V	252	22.0	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

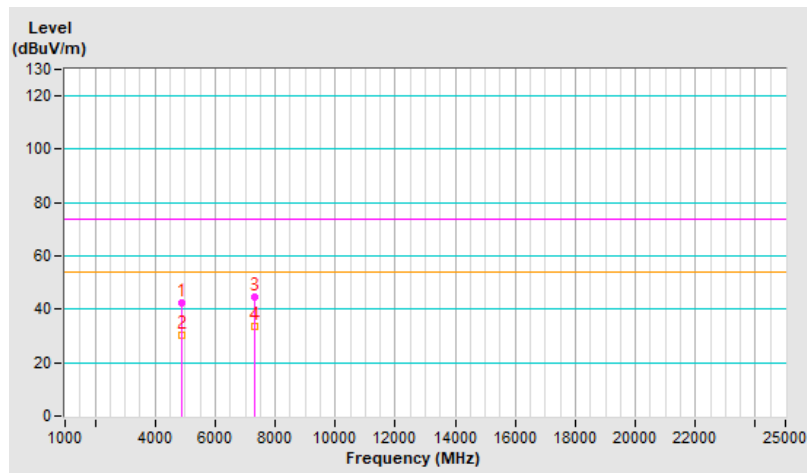




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.8 PK	74.0	-31.2	1.62 H	294	38.2	4.6
2	4924.00	30.8 AV	54.0	-23.2	1.62 H	294	26.2	4.6
3	7386.00	44.9 PK	74.0	-29.1	2.41 H	314	32.9	12.0
4	7386.00	33.8 AV	54.0	-20.2	2.41 H	314	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

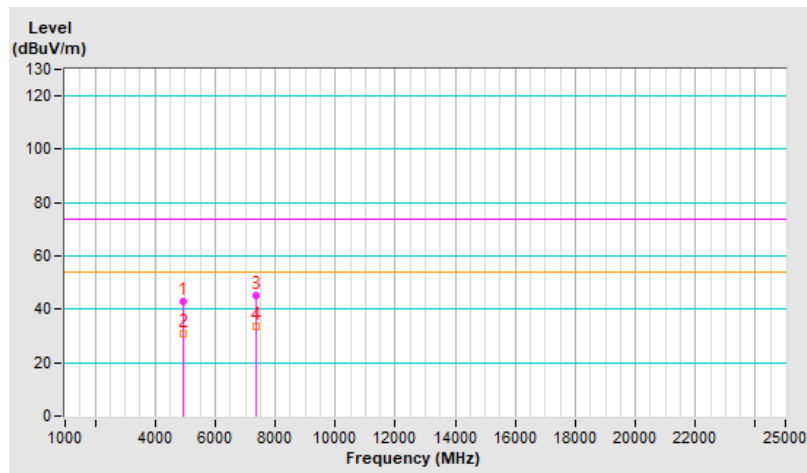


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.1 PK	74.0	-31.9	2.45 V	292	37.5	4.6
2	4924.00	30.7 AV	54.0	-23.3	2.45 V	292	26.1	4.6
3	7386.00	45.5 PK	74.0	-28.5	1.99 V	249	33.5	12.0
4	7386.00	34.2 AV	54.0	-19.8	1.99 V	249	22.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

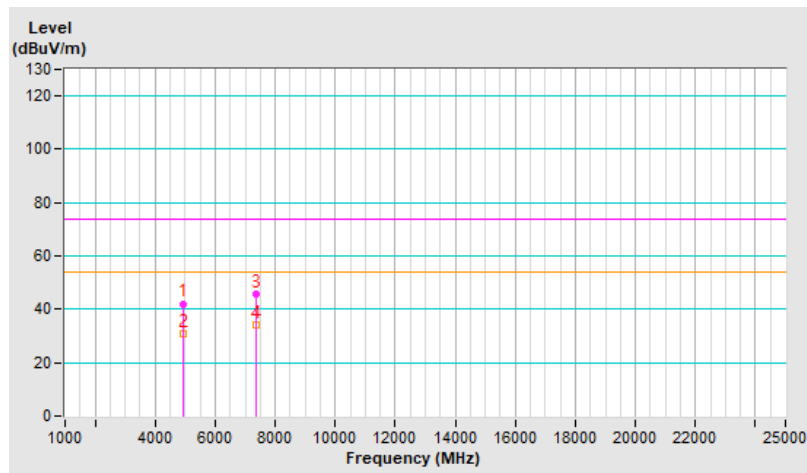






<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	1.74 H	265	37.7	4.6
2	4934.00	30.5 AV	54.0	-23.5	1.74 H	265	25.9	4.6
3	7401.00	44.9 PK	74.0	-29.1	2.44 H	296	32.9	12.0
4	7401.00	33.4 AV	54.0	-20.6	2.44 H	296	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

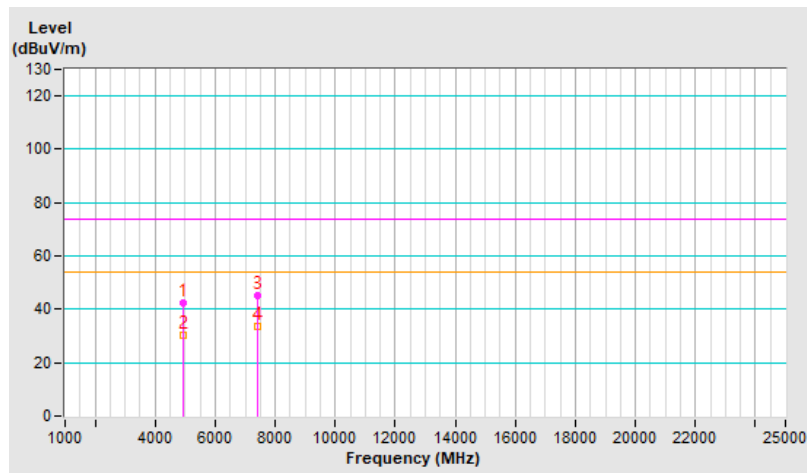


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	2.48 V	272	37.7	4.6
2	4934.00	30.8 AV	54.0	-23.2	2.48 V	272	26.2	4.6
3	7401.00	45.3 PK	74.0	-28.7	1.96 V	244	33.3	12.0
4	7401.00	33.7 AV	54.0	-20.3	1.96 V	244	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

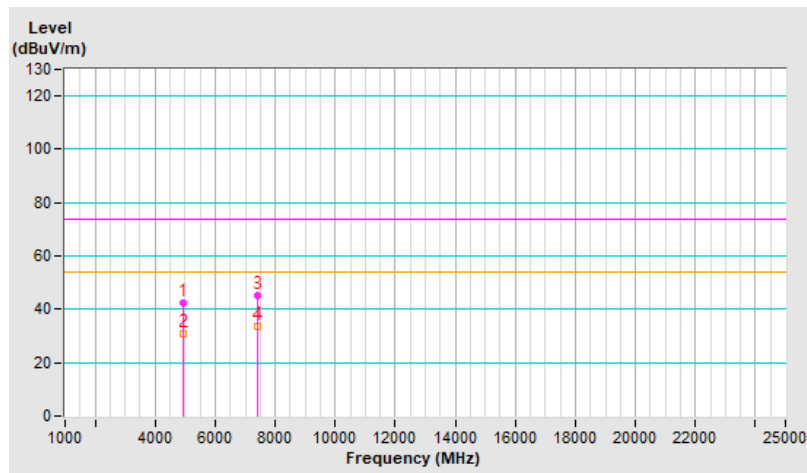


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.6 PK	74.0	-32.4	1.72 H	259	36.9	4.7
2	4944.00	30.3 AV	54.0	-23.7	1.72 H	259	25.6	4.7
3	7416.00	45.7 PK	74.0	-28.3	2.44 H	306	33.7	12.0
4	7416.00	34.3 AV	54.0	-19.7	2.44 H	306	22.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

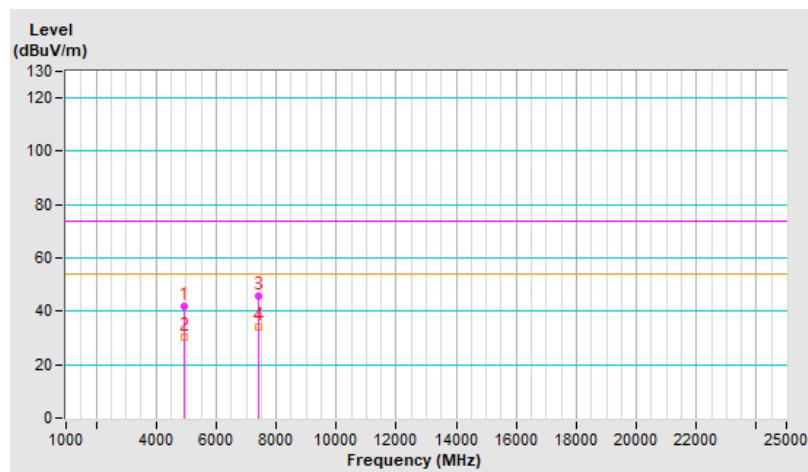


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.1 PK	74.0	-31.9	2.48 V	296	37.4	4.7
2	4944.00	30.6 AV	54.0	-23.4	2.48 V	296	25.9	4.7
3	7416.00	45.8 PK	74.0	-28.2	2.05 V	223	33.8	12.0
4	7416.00	34.6 AV	54.0	-19.4	2.05 V	223	22.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

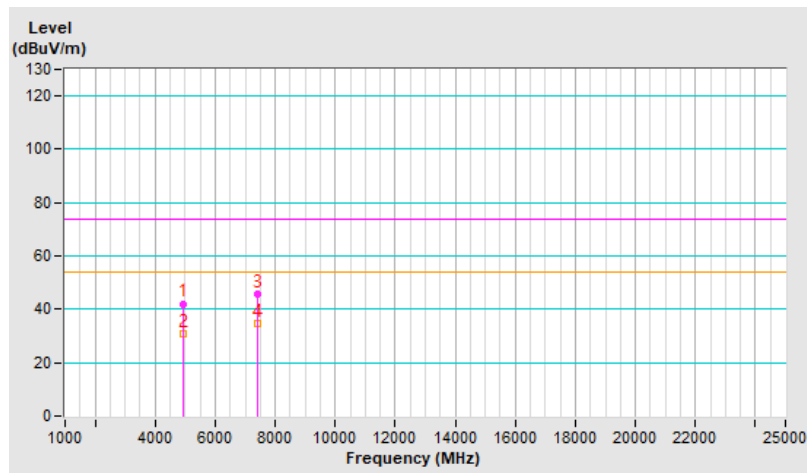


**For 1S1T**

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.1 PK	74.0	-32.9	1.81 H	259	36.6	4.5
2	4824.00	31.3 AV	54.0	-22.7	1.81 H	259	26.8	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

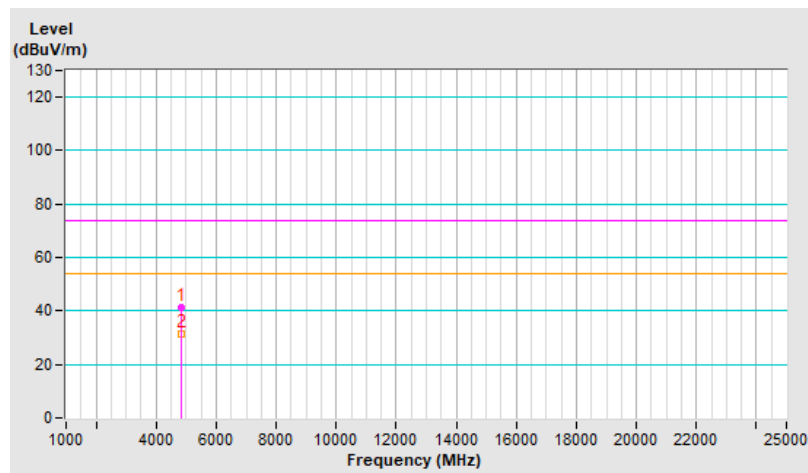




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.7 PK	74.0	-32.3	2.43 V	271	37.2	4.5
2	4824.00	30.3 AV	54.0	-23.7	2.43 V	271	25.8	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

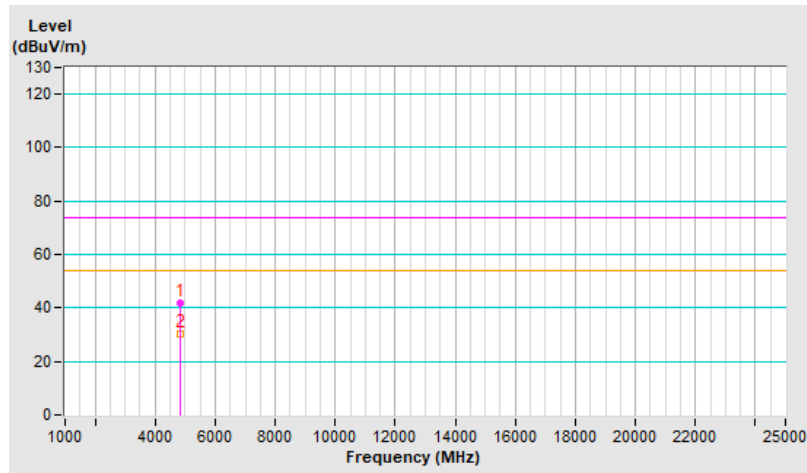




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.7 PK	74.0	-32.3	1.67 H	286	37.2	4.5
2	4874.00	30.0 AV	54.0	-24.0	1.67 H	286	25.5	4.5
3	7311.00	45.0 PK	74.0	-29.0	2.52 H	311	33.5	11.5
4	7311.00	33.7 AV	54.0	-20.3	2.52 H	311	22.2	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

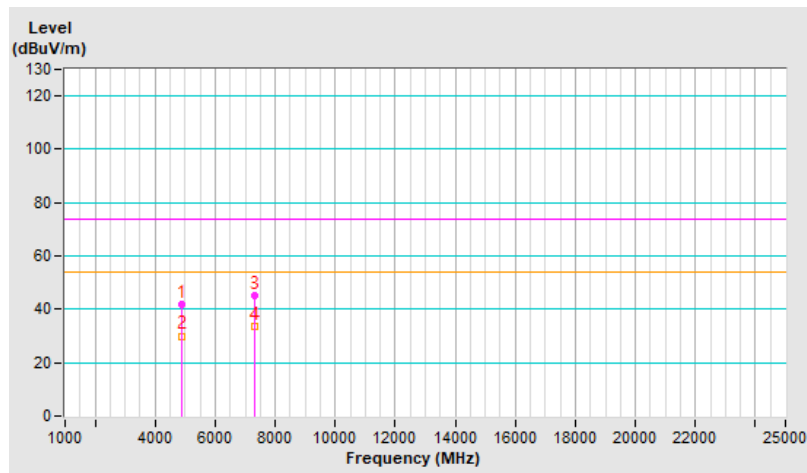


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.5 PK	74.0	-31.5	2.40 V	295	38.0	4.5
2	4874.00	30.7 AV	54.0	-23.3	2.40 V	295	26.2	4.5
3	7311.00	44.7 PK	74.0	-29.3	2.01 V	236	33.2	11.5
4	7311.00	33.6 AV	54.0	-20.4	2.01 V	236	22.1	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

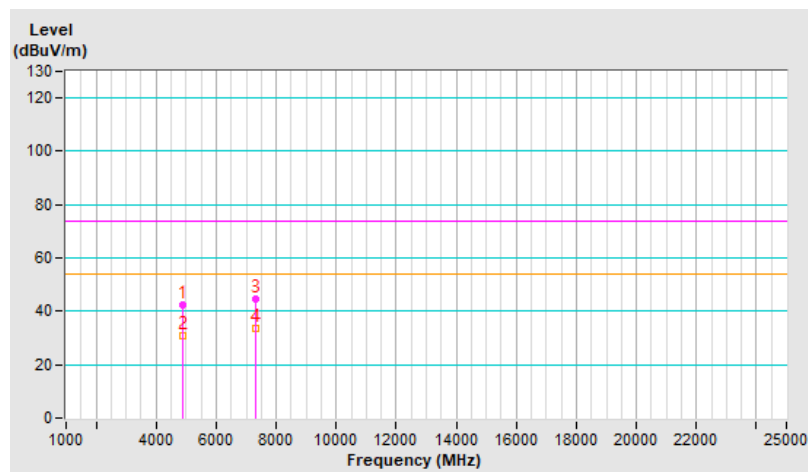




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.7 PK	74.0	-32.3	1.73 H	254	37.1	4.6
2	4924.00	29.7 AV	54.0	-24.3	1.73 H	254	25.1	4.6
3	7386.00	45.1 PK	74.0	-28.9	2.46 H	282	33.1	12.0
4	7386.00	33.8 AV	54.0	-20.2	2.46 H	282	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

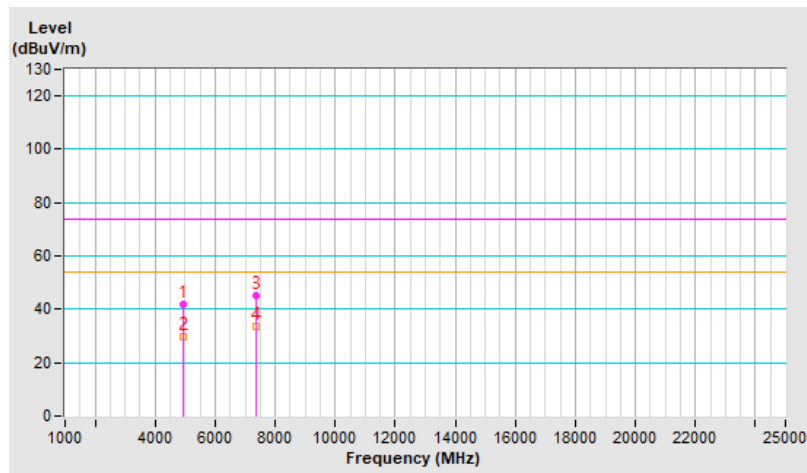


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.5 PK	74.0	-32.5	2.45 V	281	36.9	4.6
2	4924.00	29.7 AV	54.0	-24.3	2.45 V	281	25.1	4.6
3	7386.00	44.5 PK	74.0	-29.5	1.99 V	257	32.5	12.0
4	7386.00	33.4 AV	54.0	-20.6	1.99 V	257	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

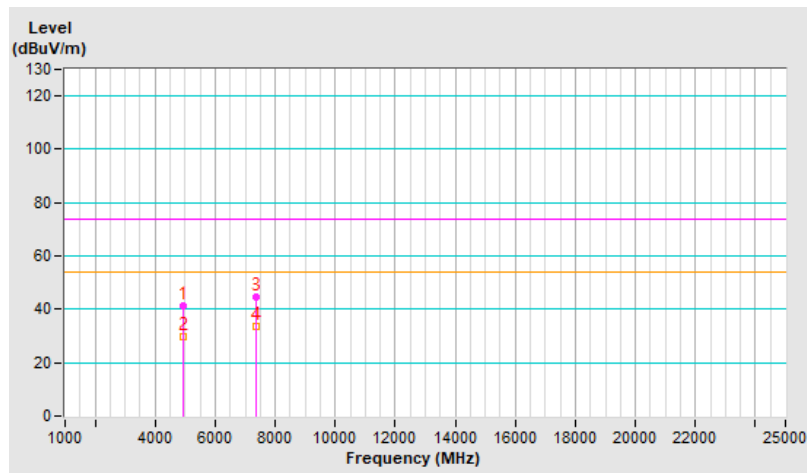


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.6 PK	74.0	-32.4	1.74 H	271	37.0	4.6
2	4934.00	30.1 AV	54.0	-23.9	1.74 H	271	25.5	4.6
3	7401.00	44.3 PK	74.0	-29.7	2.51 H	286	32.3	12.0
4	7401.00	33.3 AV	54.0	-20.7	2.51 H	286	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

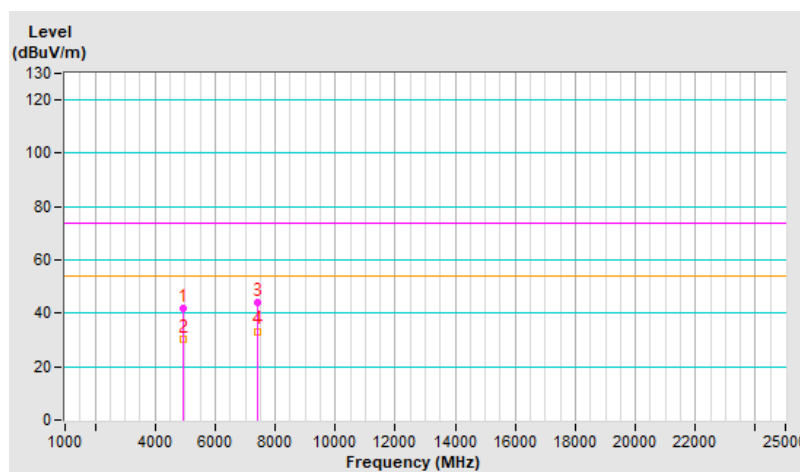




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.6 PK	74.0	-32.4	2.45 V	279	37.0	4.6
2	4934.00	29.7 AV	54.0	-24.3	2.45 V	279	25.1	4.6
3	7401.00	44.7 PK	74.0	-29.3	1.95 V	243	32.7	12.0
4	7401.00	33.5 AV	54.0	-20.5	1.95 V	243	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

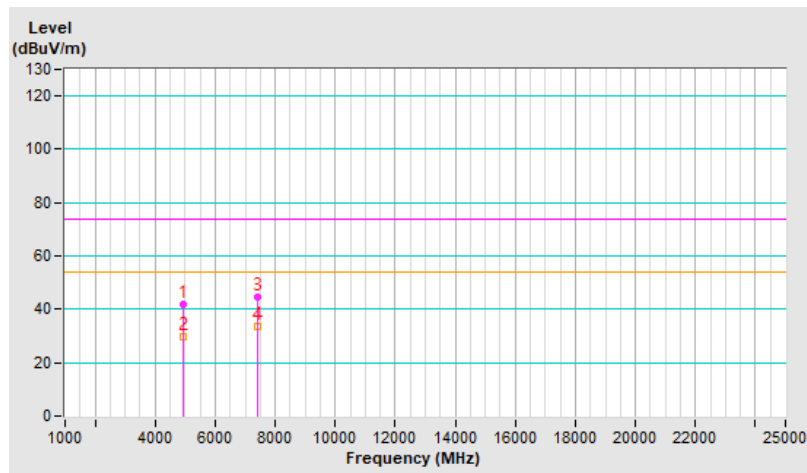


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	1.75 H	269	36.7	4.7
2	4944.00	30.2 AV	54.0	-23.8	1.75 H	269	25.5	4.7
3	7416.00	44.5 PK	74.0	-29.5	2.53 H	268	32.5	12.0
4	7416.00	33.5 AV	54.0	-20.5	2.53 H	268	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

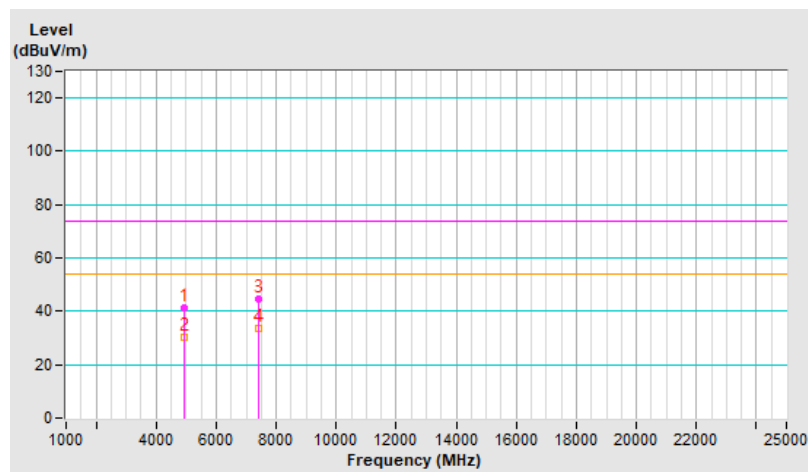


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.2 PK	74.0	-31.8	2.35 V	297	37.5	4.7
2	4944.00	30.6 AV	54.0	-23.4	2.35 V	297	25.9	4.7
3	7416.00	44.3 PK	74.0	-29.7	2.00 V	239	32.3	12.0
4	7416.00	33.3 AV	54.0	-20.7	2.00 V	239	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

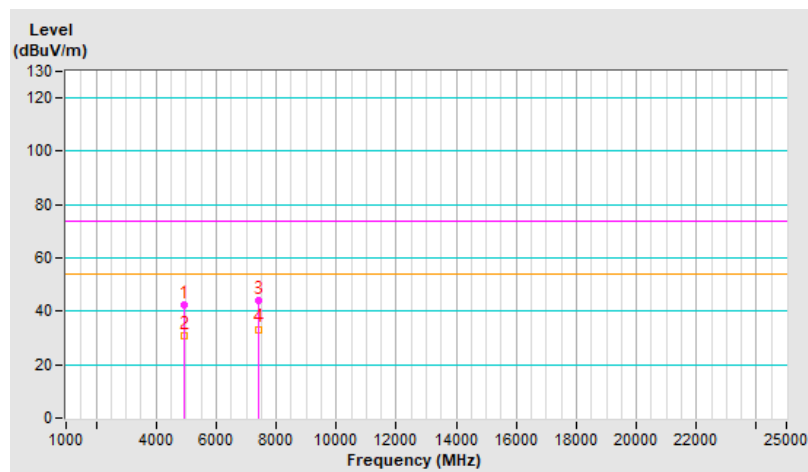




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	42.4 PK	74.0	-31.6	1.72 H	286	37.9	4.5
2	4844.00	30.6 AV	54.0	-23.4	1.72 H	286	26.1	4.5
3	7266.00	44.8 PK	74.0	-29.2	2.38 H	321	33.5	11.3
4	7266.00	33.2 AV	54.0	-20.8	2.38 H	321	21.9	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

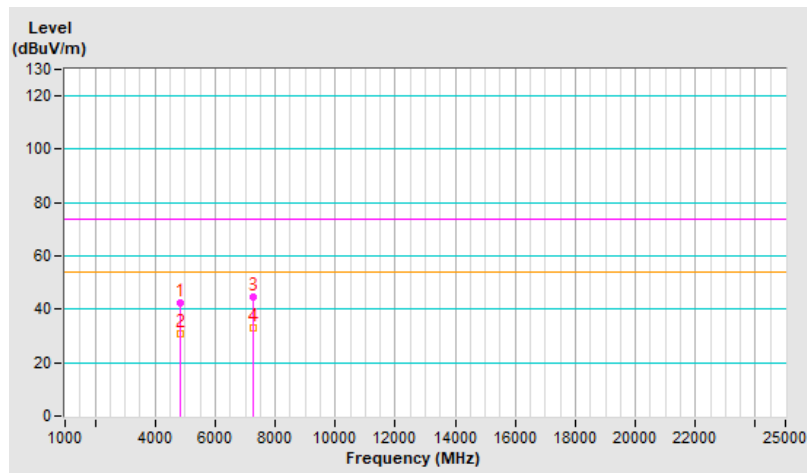


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	42.2 PK	74.0	-31.8	2.47 V	292	37.7	4.5
2	4844.00	30.5 AV	54.0	-23.5	2.47 V	292	26.0	4.5
3	7266.00	45.3 PK	74.0	-28.7	1.98 V	227	34.0	11.3
4	7266.00	33.6 AV	54.0	-20.4	1.98 V	227	22.3	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

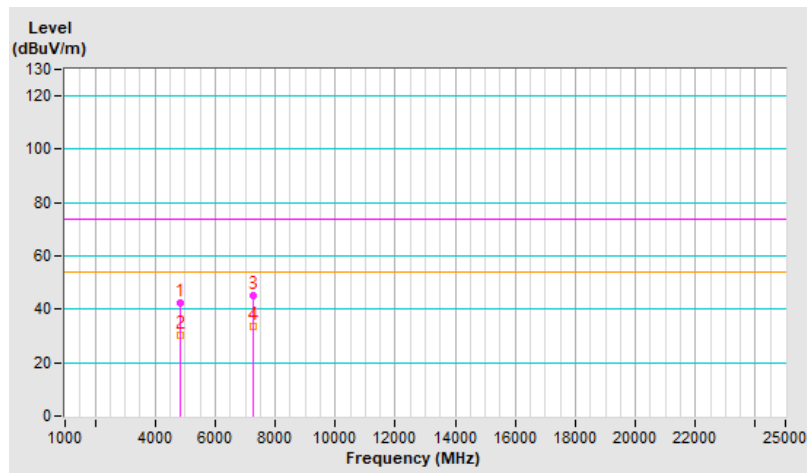




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.8 PK	74.0	-31.2	1.78 H	264	38.3	4.5
2	4874.00	30.9 AV	54.0	-23.1	1.78 H	264	26.4	4.5
3	7311.00	45.4 PK	74.0	-28.6	2.38 H	309	33.9	11.5
4	7311.00	34.2 AV	54.0	-19.8	2.38 H	309	22.7	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

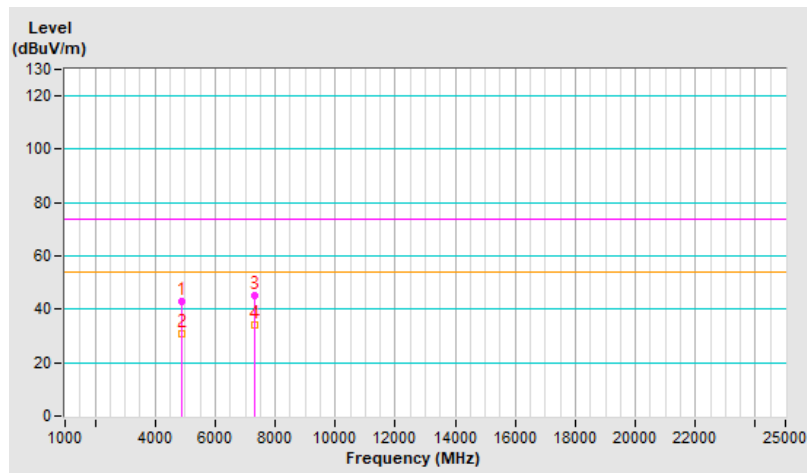


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.0 PK	74.0	-31.0	2.51 V	274	38.5	4.5
2	4874.00	31.1 AV	54.0	-22.9	2.51 V	274	26.6	4.5
3	7311.00	45.2 PK	74.0	-28.8	1.98 V	241	33.7	11.5
4	7311.00	33.7 AV	54.0	-20.3	1.98 V	241	22.2	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

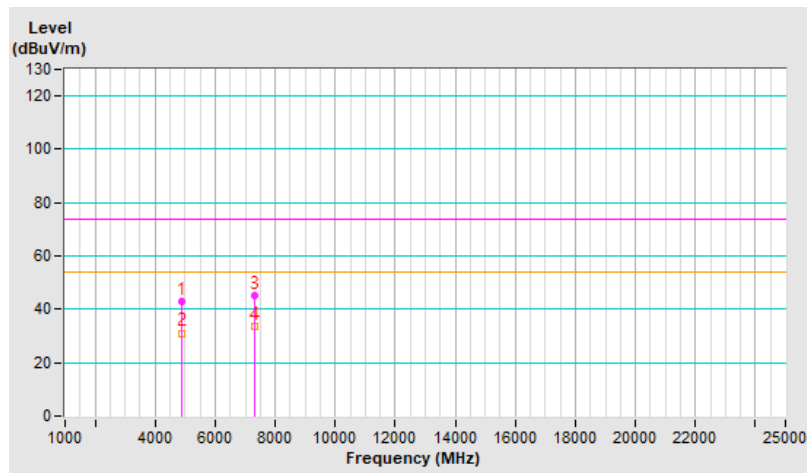




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	43.2 PK	74.0	-30.8	1.79 H	252	38.7	4.5
2	4904.00	31.5 AV	54.0	-22.5	1.79 H	252	27.0	4.5
3	7356.00	44.8 PK	74.0	-29.2	2.37 H	312	32.9	11.9
4	7356.00	33.4 AV	54.0	-20.6	2.37 H	312	21.5	11.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

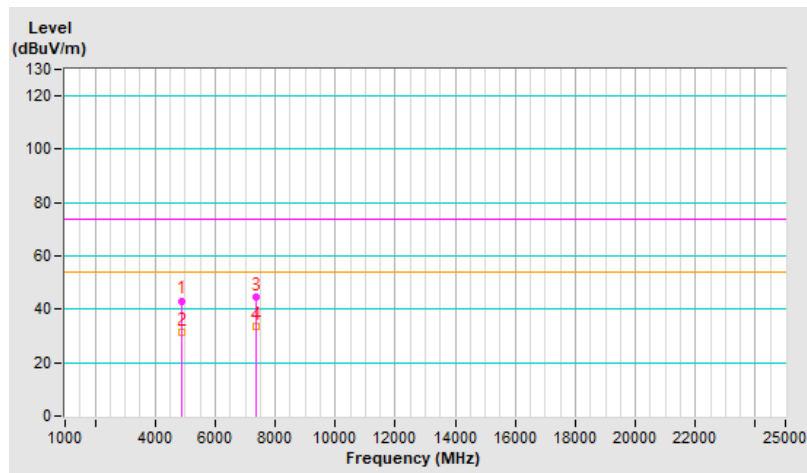


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	43.0 PK	74.0	-31.0	2.46 V	277	38.5	4.5
2	4904.00	31.2 AV	54.0	-22.8	2.46 V	277	26.7	4.5
3	7356.00	45.2 PK	74.0	-28.8	2.05 V	245	33.3	11.9
4	7356.00	33.7 AV	54.0	-20.3	2.05 V	245	21.8	11.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

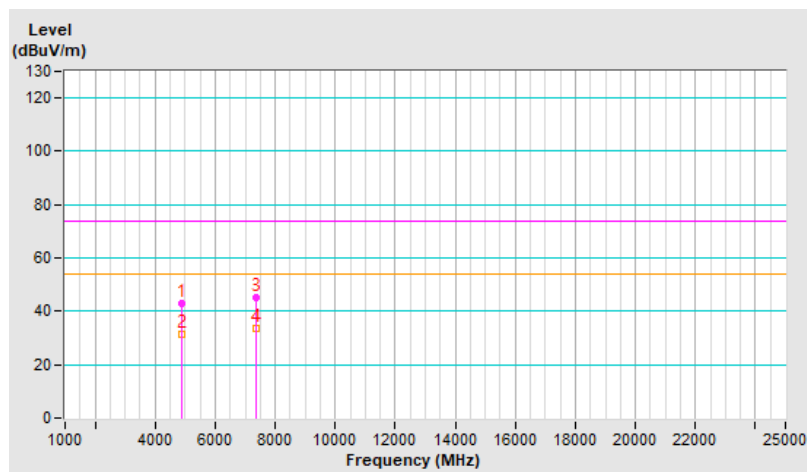


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.9 PK	74.0	-31.1	1.75 H	262	38.3	4.6
2	4914.00	30.9 AV	54.0	-23.1	1.75 H	262	26.3	4.6
3	7371.00	45.5 PK	74.0	-28.5	2.45 H	293	33.5	12.0
4	7371.00	33.8 AV	54.0	-20.2	2.45 H	293	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

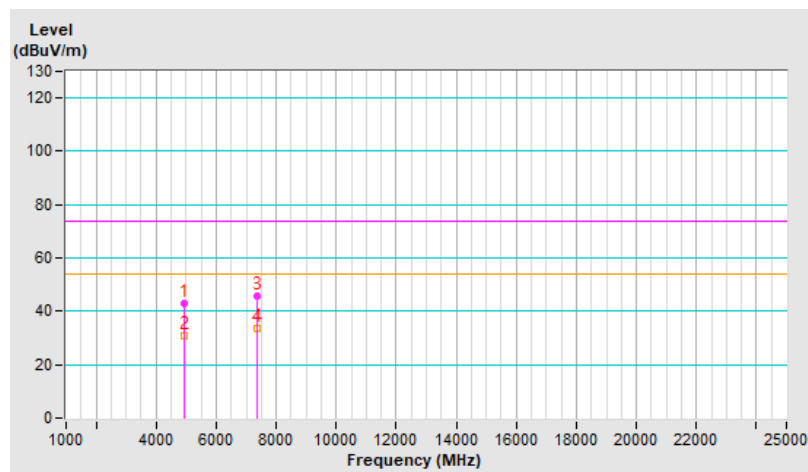


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	43.3 PK	74.0	-30.7	2.57 V	297	38.7	4.6
2	4914.00	31.4 AV	54.0	-22.6	2.57 V	297	26.8	4.6
3	7371.00	45.0 PK	74.0	-29.0	2.06 V	247	33.0	12.0
4	7371.00	33.8 AV	54.0	-20.2	2.06 V	247	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

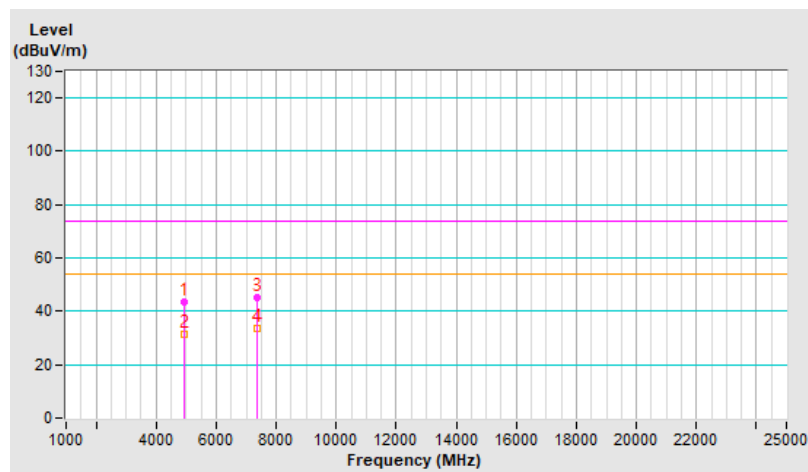


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.6 PK	74.0	-31.4	1.79 H	241	38.0	4.6
2	4924.00	30.9 AV	54.0	-23.1	1.79 H	241	26.3	4.6
3	7386.00	45.8 PK	74.0	-28.2	2.45 H	311	33.8	12.0
4	7386.00	34.1 AV	54.0	-19.9	2.45 H	311	22.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

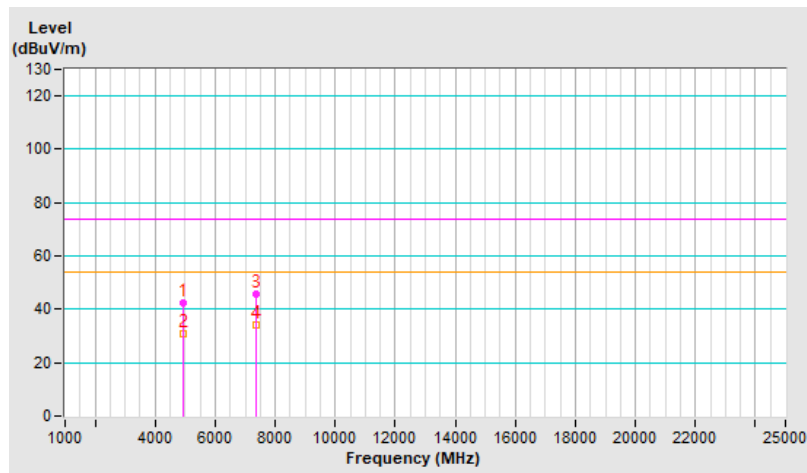




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.7 PK	74.0	-31.3	2.56 V	296	38.1	4.6
2	4924.00	31.0 AV	54.0	-23.0	2.56 V	296	26.4	4.6
3	7386.00	45.8 PK	74.0	-28.2	2.05 V	258	33.8	12.0
4	7386.00	34.3 AV	54.0	-19.7	2.05 V	258	22.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

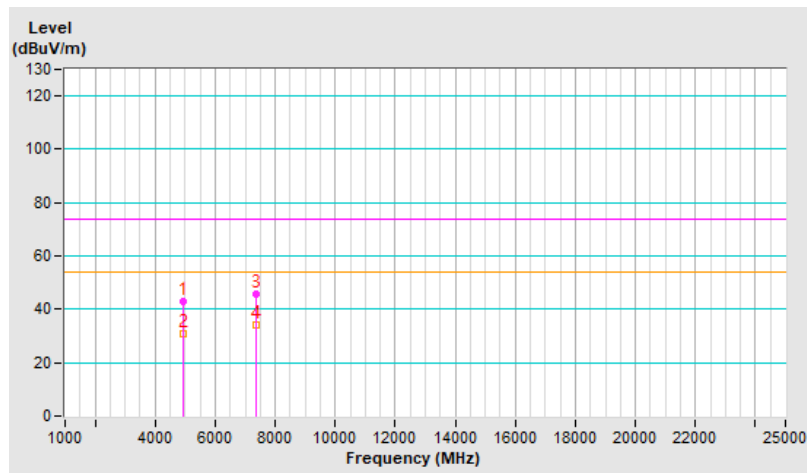




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.0 PK	74.0	-32.0	1.75 H	265	37.5	4.5
2	4824.00	31.8 AV	54.0	-22.2	1.75 H	265	27.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

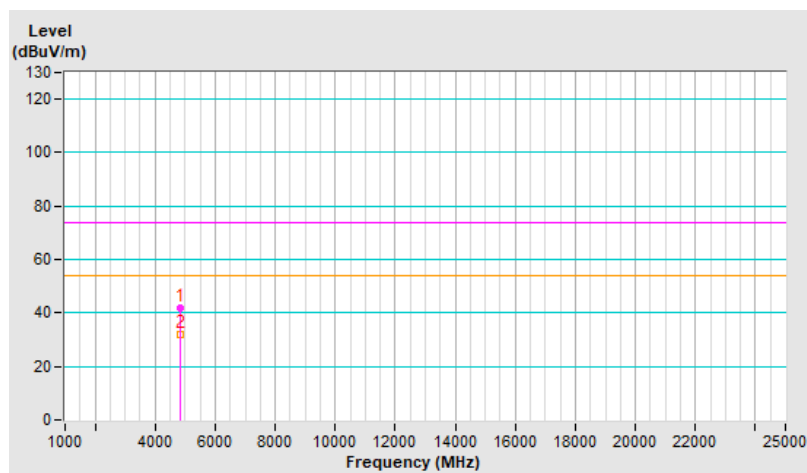


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.5 PK	74.0	-31.5	2.54 V	276	38.0	4.5
2	4824.00	30.6 AV	54.0	-23.4	2.54 V	276	26.1	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

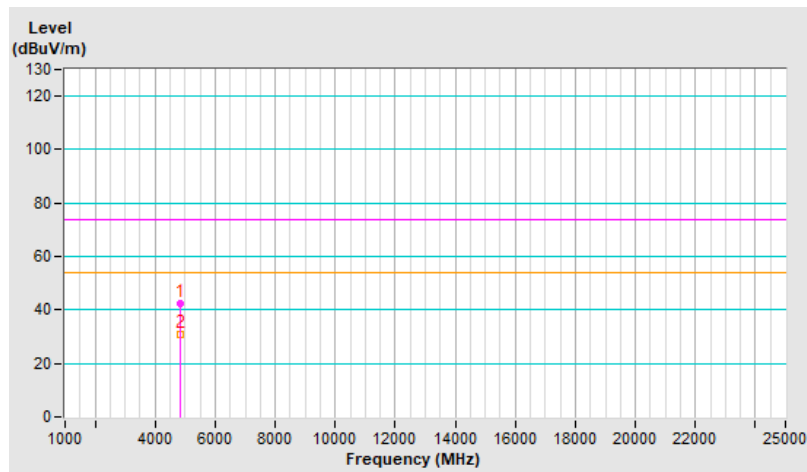


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.0 PK	74.0	-32.0	1.76 H	273	37.5	4.5
2	4874.00	30.4 AV	54.0	-23.6	1.76 H	273	25.9	4.5
3	7311.00	44.2 PK	74.0	-29.8	2.54 H	297	32.7	11.5
4	7311.00	33.4 AV	54.0	-20.6	2.54 H	297	21.9	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

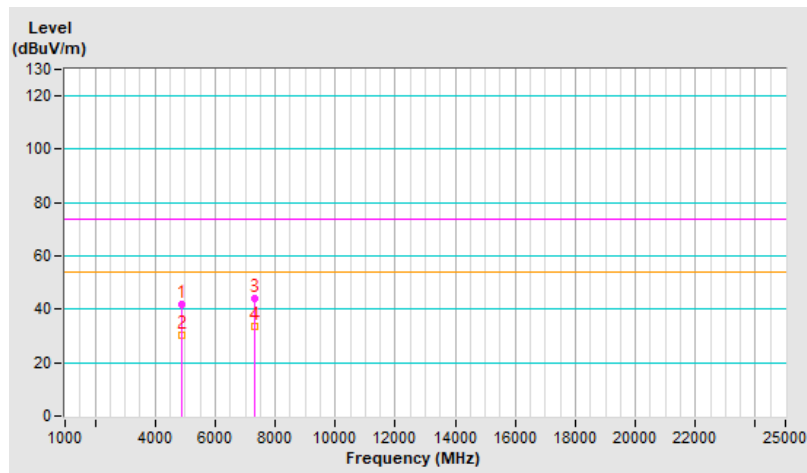


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.0 PK	74.0	-32.0	2.59 V	268	37.5	4.5
2	4874.00	30.1 AV	54.0	-23.9	2.59 V	268	25.6	4.5
3	7311.00	44.3 PK	74.0	-29.7	1.89 V	254	32.8	11.5
4	7311.00	33.3 AV	54.0	-20.7	1.89 V	254	21.8	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

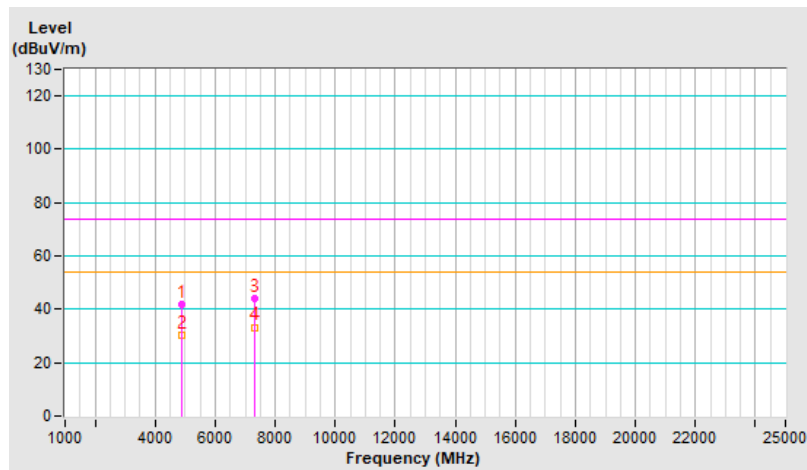


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	1.72 H	263	37.8	4.6
2	4924.00	30.4 AV	54.0	-23.6	1.72 H	263	25.8	4.6
3	7386.00	44.1 PK	74.0	-29.9	2.51 H	279	32.1	12.0
4	7386.00	33.1 AV	54.0	-20.9	2.51 H	279	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

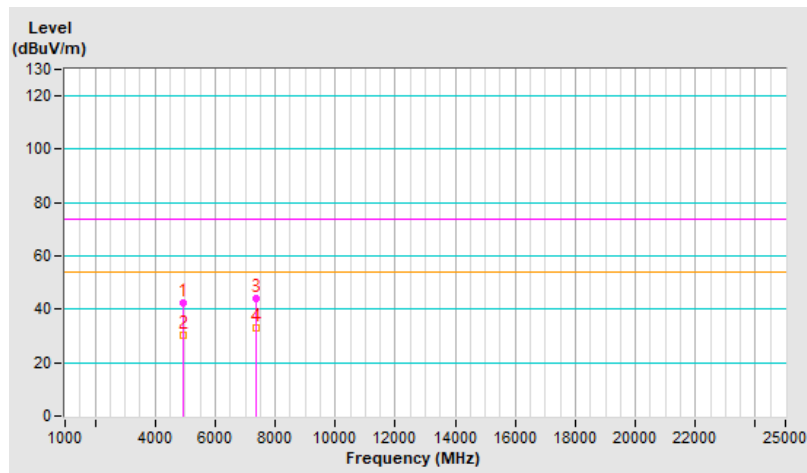




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.5 PK	74.0	-31.5	2.51 V	268	37.9	4.6
2	4924.00	30.5 AV	54.0	-23.5	2.51 V	268	25.9	4.6
3	7386.00	44.2 PK	74.0	-29.8	1.95 V	254	32.2	12.0
4	7386.00	33.0 AV	54.0	-21.0	1.95 V	254	21.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

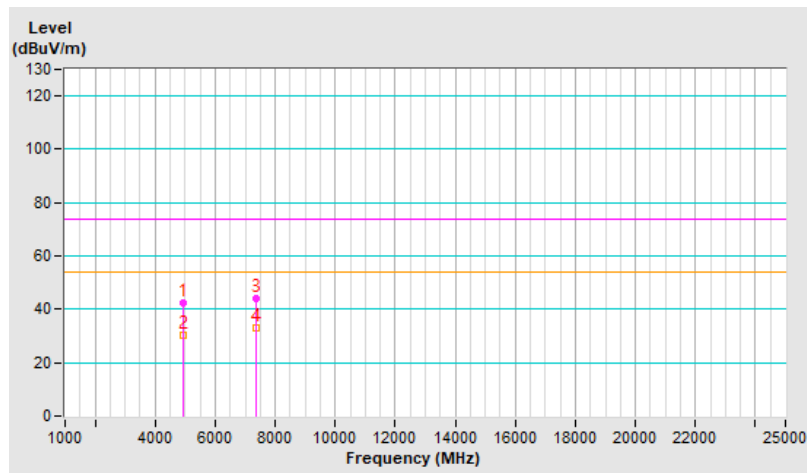


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.7 PK	74.0	-32.3	1.78 H	279	37.1	4.6
2	4934.00	29.6 AV	54.0	-24.4	1.78 H	279	25.0	4.6
3	7401.00	44.0 PK	74.0	-30.0	2.52 H	296	32.0	12.0
4	7401.00	33.0 AV	54.0	-21.0	2.52 H	296	21.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

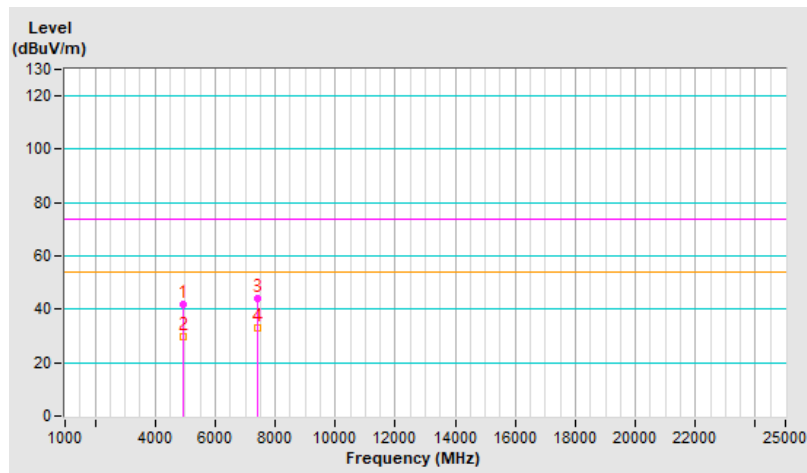




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.8 PK	74.0	-32.2	2.53 V	288	37.2	4.6
2	4934.00	30.1 AV	54.0	-23.9	2.53 V	288	25.5	4.6
3	7401.00	45.0 PK	74.0	-29.0	1.96 V	255	33.0	12.0
4	7401.00	33.7 AV	54.0	-20.3	1.96 V	255	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

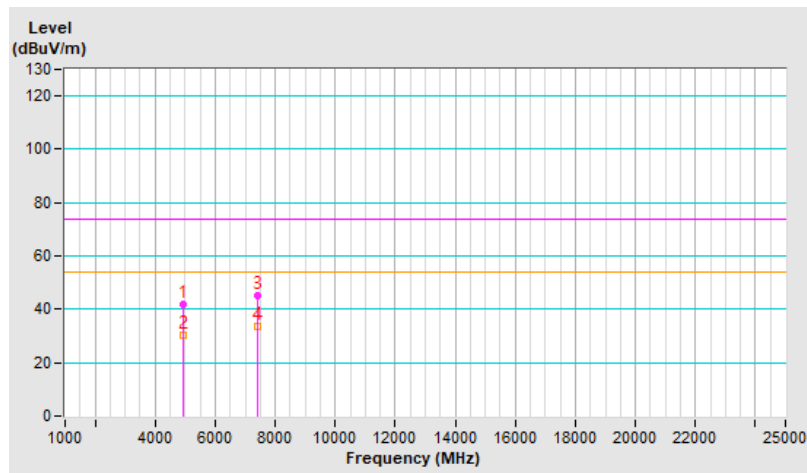






<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.4 PK	74.0	-32.6	1.79 H	270	36.7	4.7
2	4944.00	31.5 AV	54.0	-22.5	1.79 H	270	26.8	4.7
3	7416.00	46.9 PK	74.0	-27.1	2.60 H	298	34.9	12.0
4	7416.00	33.6 AV	54.0	-20.4	2.60 H	298	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

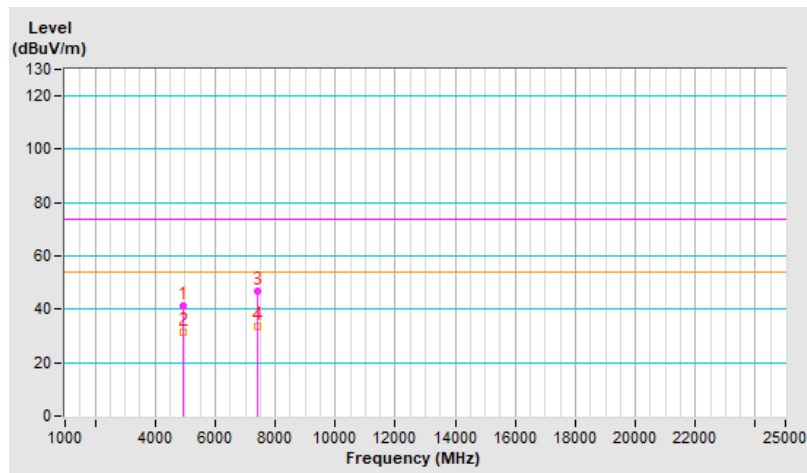


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.0 PK	74.0	-32.0	2.56 V	287	37.3	4.7
2	4944.00	30.3 AV	54.0	-23.7	2.56 V	287	25.6	4.7
3	7416.00	44.0 PK	74.0	-30.0	2.01 V	254	32.0	12.0
4	7416.00	33.1 AV	54.0	-20.9	2.01 V	254	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

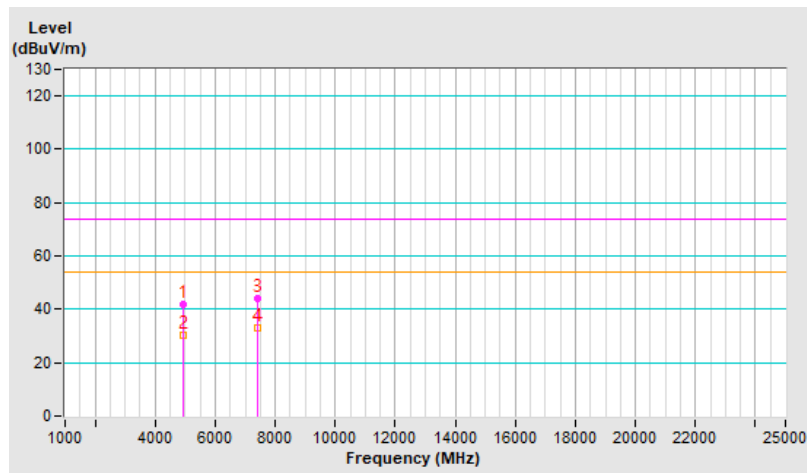


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.2 PK	74.0	-32.8	1.76 H	257	36.7	4.5
2	4824.00	31.6 AV	54.0	-22.4	1.76 H	257	27.1	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

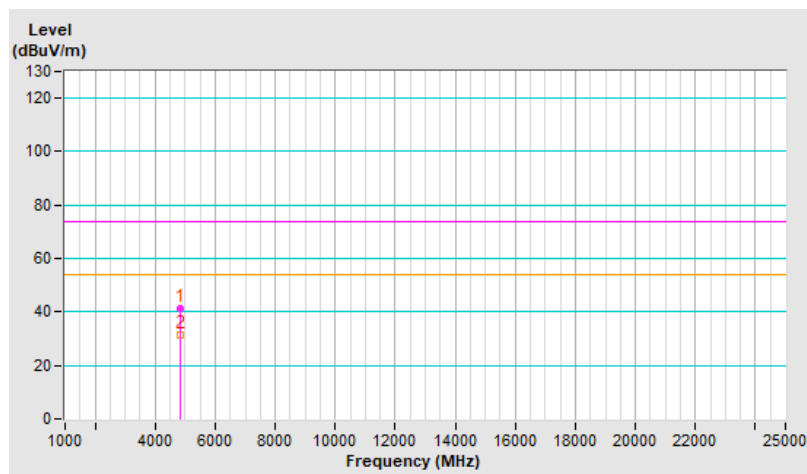




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.8 PK	74.0	-32.2	2.55 V	300	37.3	4.5
2	4824.00	30.4 AV	54.0	-23.6	2.55 V	300	25.9	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

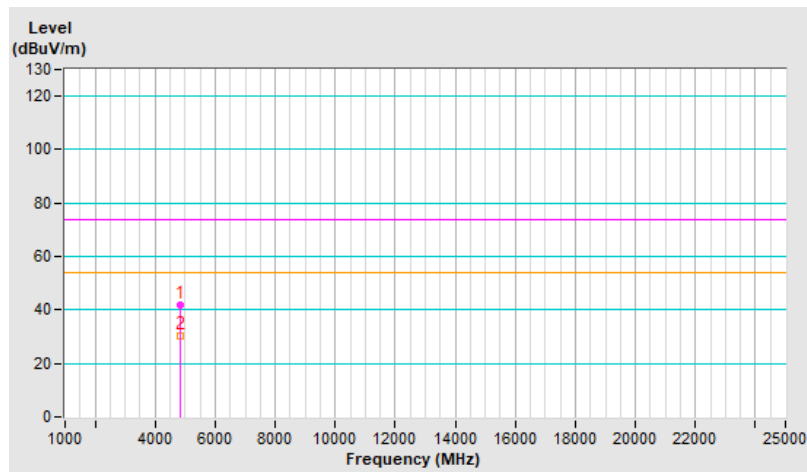


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.3 PK	74.0	-32.7	1.81 H	261	36.8	4.5
2	4874.00	31.3 AV	54.0	-22.7	1.81 H	261	26.8	4.5
3	7311.00	46.6 PK	74.0	-27.4	2.62 H	304	35.1	11.5
4	7311.00	33.2 AV	54.0	-20.8	2.62 H	304	21.7	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

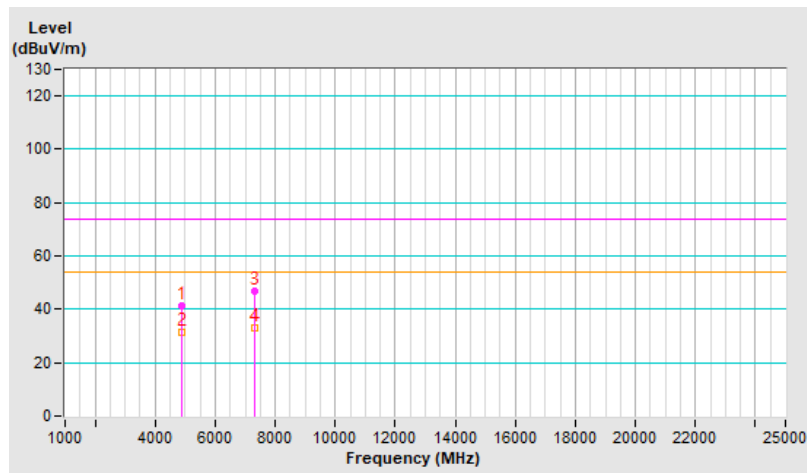


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	2.58 V	278	37.3	4.5
2	4874.00	29.8 AV	54.0	-24.2	2.58 V	278	25.3	4.5
3	7311.00	43.7 PK	74.0	-30.3	1.97 V	267	32.2	11.5
4	7311.00	32.8 AV	54.0	-21.2	1.97 V	267	21.3	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

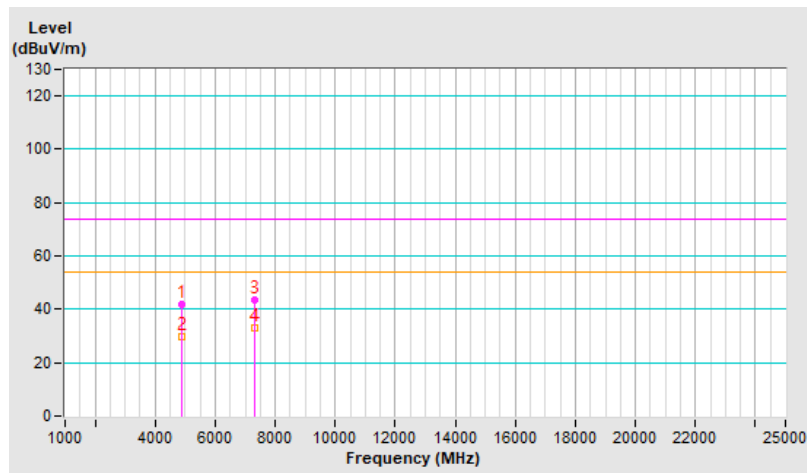


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.1 PK	74.0	-32.9	1.83 H	281	36.5	4.6
2	4924.00	31.3 AV	54.0	-22.7	1.83 H	281	26.7	4.6
3	7386.00	47.0 PK	74.0	-27.0	2.56 H	302	35.0	12.0
4	7386.00	33.7 AV	54.0	-20.3	2.56 H	302	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

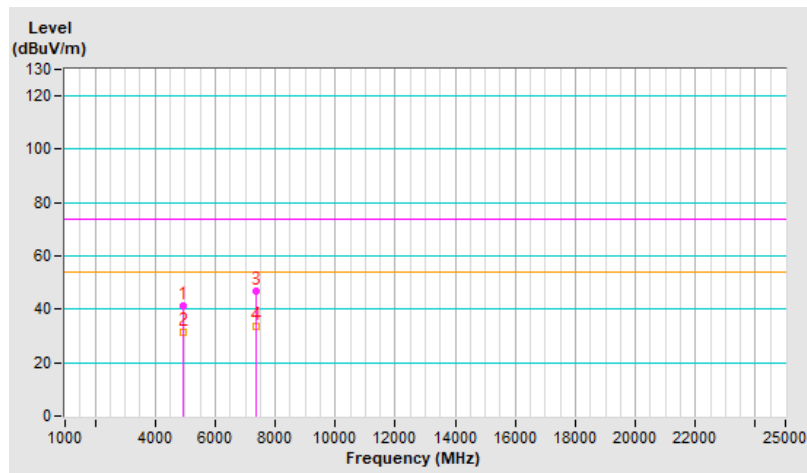


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.1 PK	74.0	-31.9	2.58 V	299	37.5	4.6
2	4924.00	30.7 AV	54.0	-23.3	2.58 V	299	26.1	4.6
3	7386.00	43.6 PK	74.0	-30.4	2.04 V	250	31.6	12.0
4	7386.00	32.8 AV	54.0	-21.2	2.04 V	250	20.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

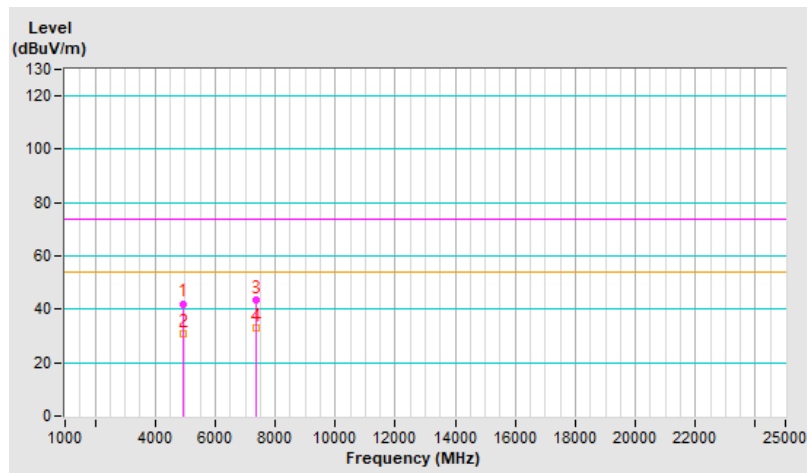




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.3 PK	74.0	-32.7	1.81 H	282	36.7	4.6
2	4934.00	31.6 AV	54.0	-22.4	1.81 H	282	27.0	4.6
3	7401.00	46.6 PK	74.0	-27.4	2.59 H	318	34.6	12.0
4	7401.00	33.2 AV	54.0	-20.8	2.59 H	318	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

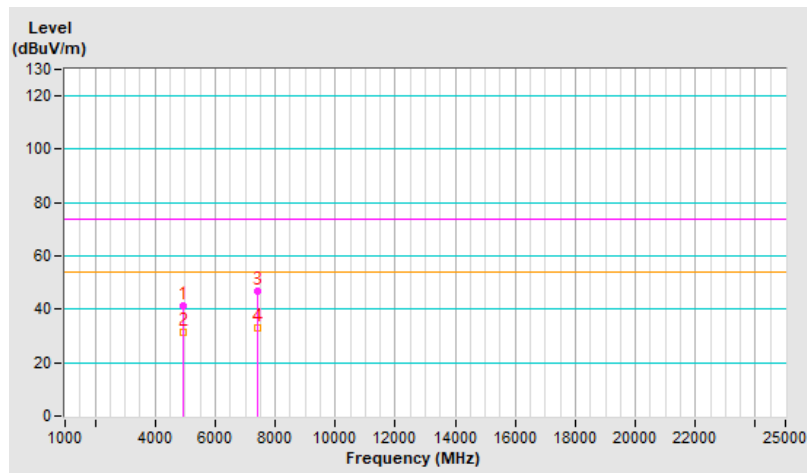




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.61 V	281	37.8	4.6
2	4934.00	30.8 AV	54.0	-23.2	2.61 V	281	26.2	4.6
3	7401.00	43.9 PK	74.0	-30.1	2.06 V	262	31.9	12.0
4	7401.00	32.8 AV	54.0	-21.2	2.06 V	262	20.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

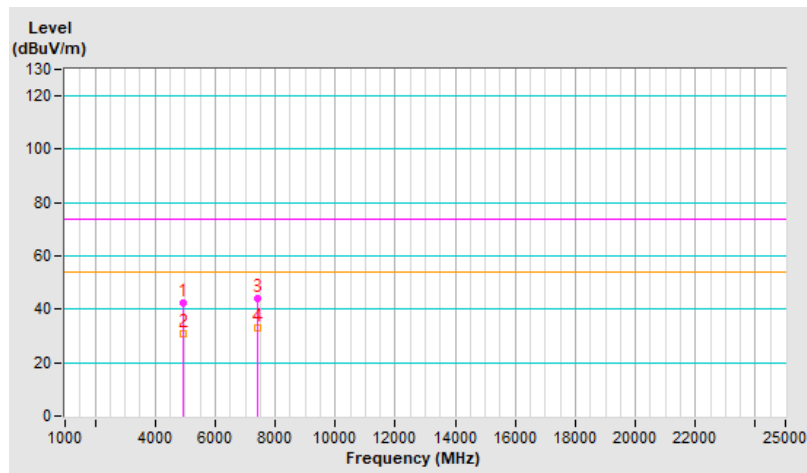


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.9 PK	74.0	-33.1	1.85 H	268	36.2	4.7
2	4944.00	31.2 AV	54.0	-22.8	1.85 H	268	26.5	4.7
3	7416.00	47.1 PK	74.0	-26.9	2.52 H	289	35.1	12.0
4	7416.00	33.6 AV	54.0	-20.4	2.52 H	289	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

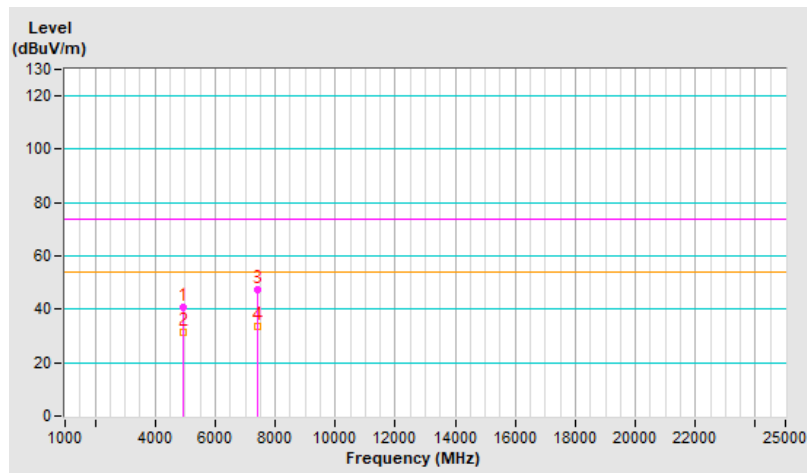


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.8 PK	74.0	-32.2	2.60 V	275	37.1	4.7
2	4944.00	29.9 AV	54.0	-24.1	2.60 V	275	25.2	4.7
3	7416.00	44.5 PK	74.0	-29.5	1.95 V	261	32.5	12.0
4	7416.00	33.6 AV	54.0	-20.4	1.95 V	261	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

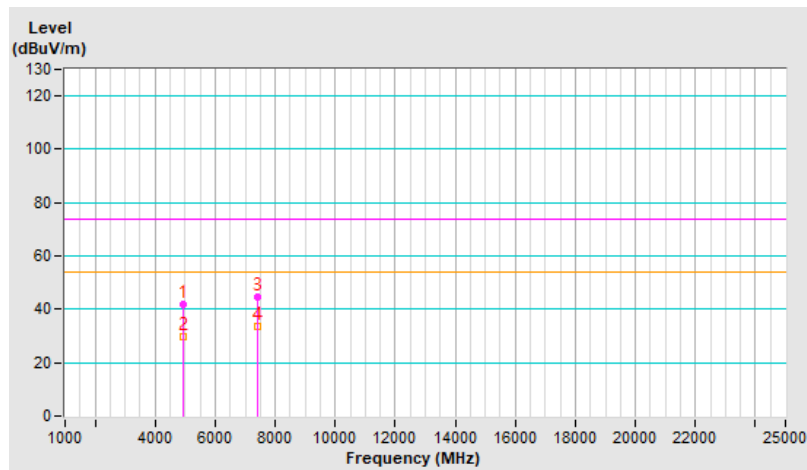


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.0 PK	74.0	-33.0	1.88 H	264	36.5	4.5
2	4824.00	31.6 AV	54.0	-22.4	1.88 H	264	27.1	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

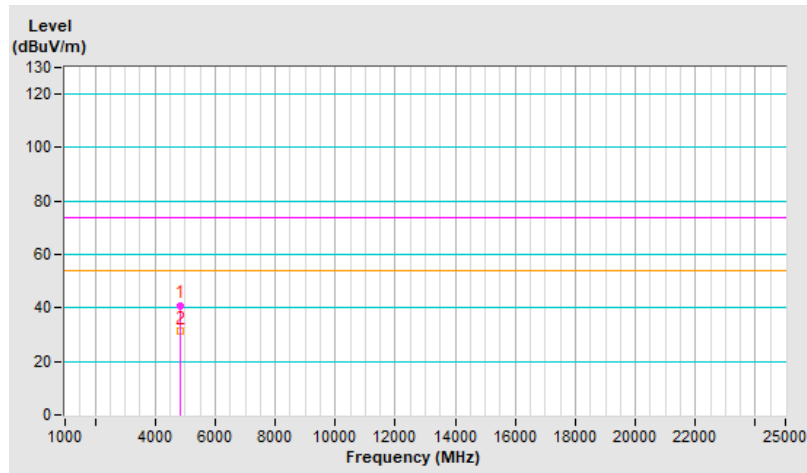


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.1 PK	74.0	-31.9	2.61 V	297	37.6	4.5
2	4824.00	30.6 AV	54.0	-23.4	2.61 V	297	26.1	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

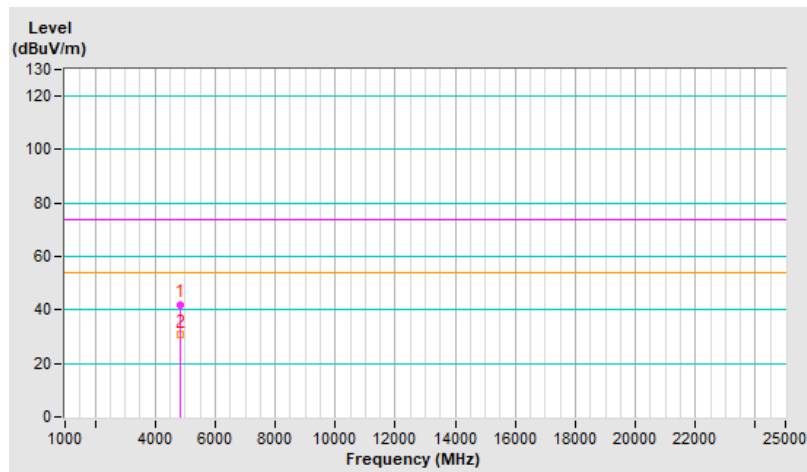


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.1 PK	74.0	-32.9	1.84 H	260	36.6	4.5
2	4874.00	31.2 AV	54.0	-22.8	1.84 H	260	26.7	4.5
3	7311.00	46.6 PK	74.0	-27.4	2.47 H	292	35.1	11.5
4	7311.00	33.1 AV	54.0	-20.9	2.47 H	292	21.6	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

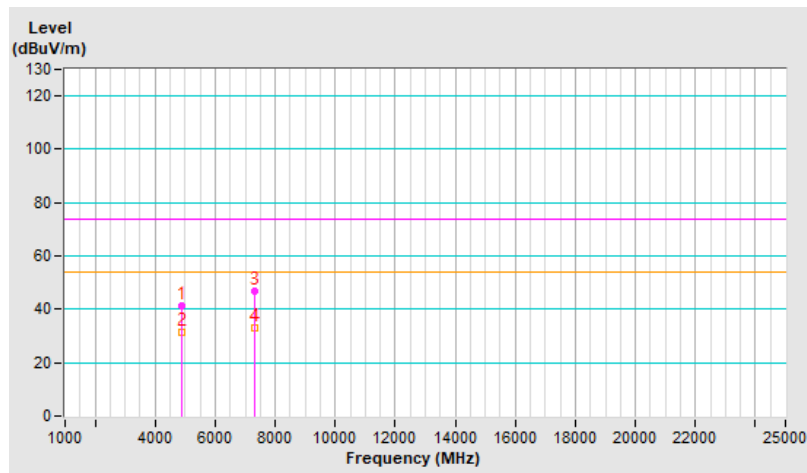


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.2 PK	74.0	-31.8	2.56 V	272	37.7	4.5
2	4874.00	30.4 AV	54.0	-23.6	2.56 V	272	25.9	4.5
3	7311.00	44.8 PK	74.0	-29.2	1.89 V	266	33.3	11.5
4	7311.00	33.9 AV	54.0	-20.1	1.89 V	266	22.4	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

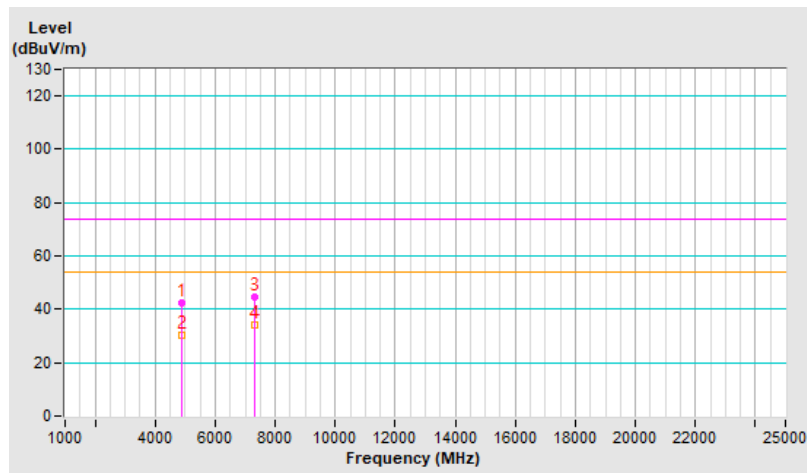




<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.3 PK	74.0	-32.7	1.79 H	278	36.7	4.6
2	4924.00	31.6 AV	54.0	-22.4	1.79 H	278	27.0	4.6
3	7386.00	47.4 PK	74.0	-26.6	2.47 H	275	35.4	12.0
4	7386.00	33.5 AV	54.0	-20.5	2.47 H	275	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

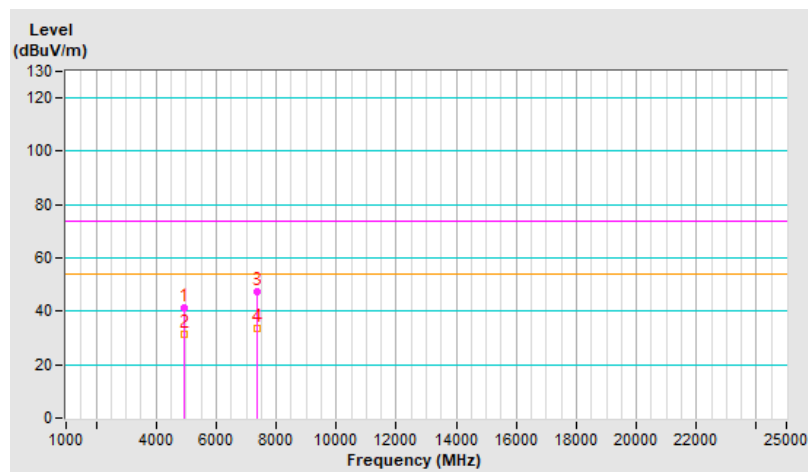


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.3 PK	74.0	-31.7	2.65 V	289	37.7	4.6
2	4924.00	30.3 AV	54.0	-23.7	2.65 V	289	25.7	4.6
3	7386.00	44.1 PK	74.0	-29.9	2.01 V	248	32.1	12.0
4	7386.00	33.2 AV	54.0	-20.8	2.01 V	248	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

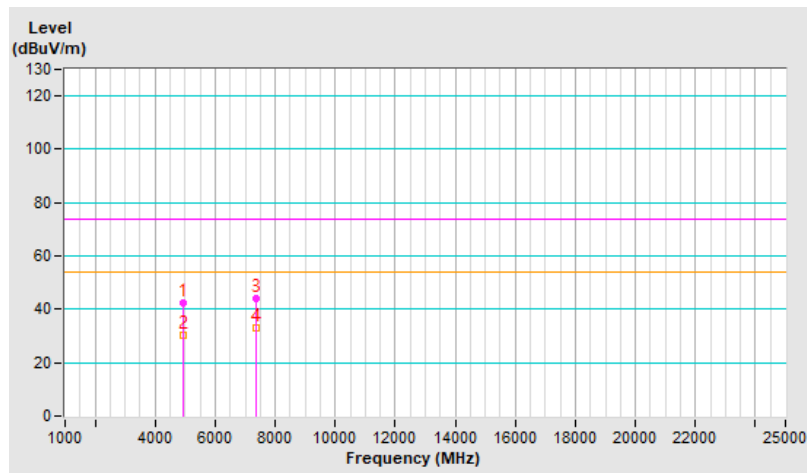


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.0 PK	74.0	-33.0	1.89 H	280	36.4	4.6
2	4934.00	31.5 AV	54.0	-22.5	1.89 H	280	26.9	4.6
3	7401.00	47.1 PK	74.0	-26.9	2.48 H	280	35.1	12.0
4	7401.00	33.8 AV	54.0	-20.2	2.48 H	280	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

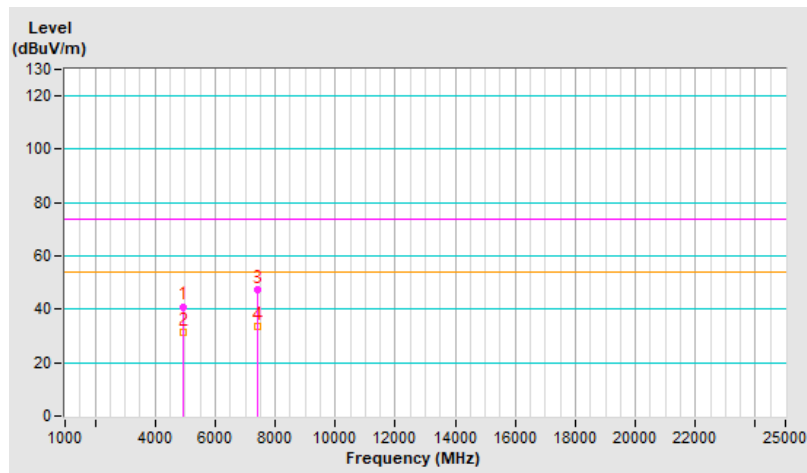


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.57 V	269	37.8	4.6
2	4934.00	30.3 AV	54.0	-23.7	2.57 V	269	25.7	4.6
3	7401.00	44.3 PK	74.0	-29.7	2.00 V	272	32.3	12.0
4	7401.00	32.8 AV	54.0	-21.2	2.00 V	272	20.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

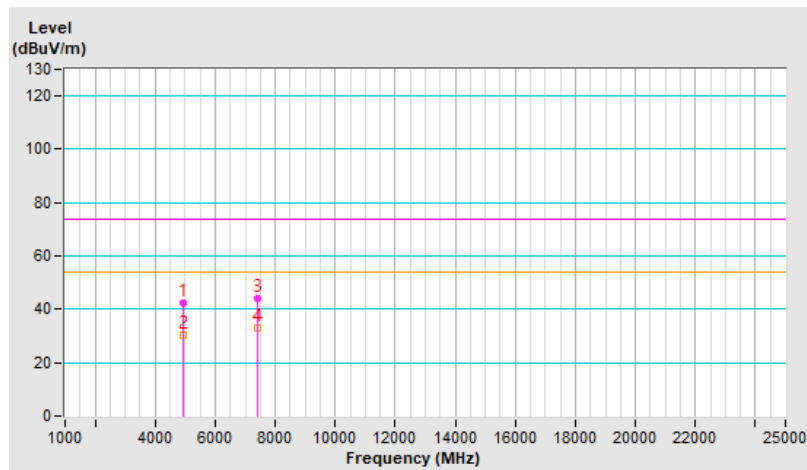


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.8 PK	74.0	-33.2	1.81 H	280	36.1	4.7
2	4944.00	30.8 AV	54.0	-23.2	1.81 H	280	26.1	4.7
3	7416.00	47.4 PK	74.0	-26.6	2.50 H	303	35.4	12.0
4	7416.00	33.7 AV	54.0	-20.3	2.50 H	303	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

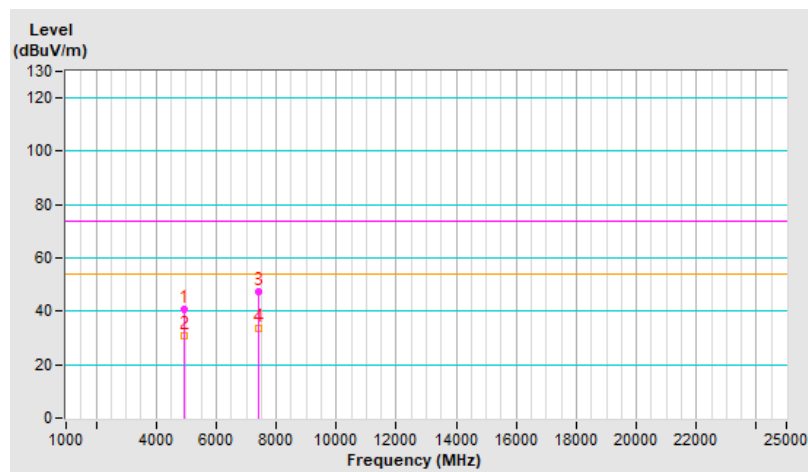


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.0 PK	74.0	-32.0	2.57 V	286	37.3	4.7
2	4944.00	30.0 AV	54.0	-24.0	2.57 V	286	25.3	4.7
3	7416.00	44.0 PK	74.0	-30.0	1.94 V	264	32.0	12.0
4	7416.00	33.6 AV	54.0	-20.4	1.94 V	264	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

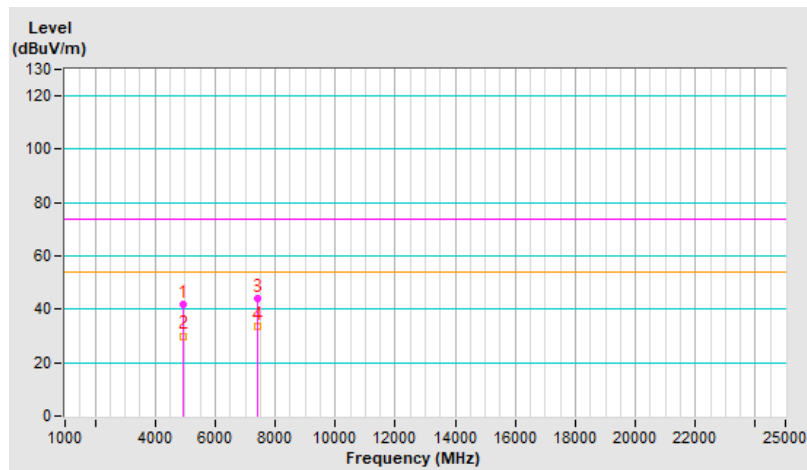


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.1 PK	74.0	-32.9	1.82 H	267	36.6	4.5
2	4824.00	30.9 AV	54.0	-23.1	1.82 H	267	26.4	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

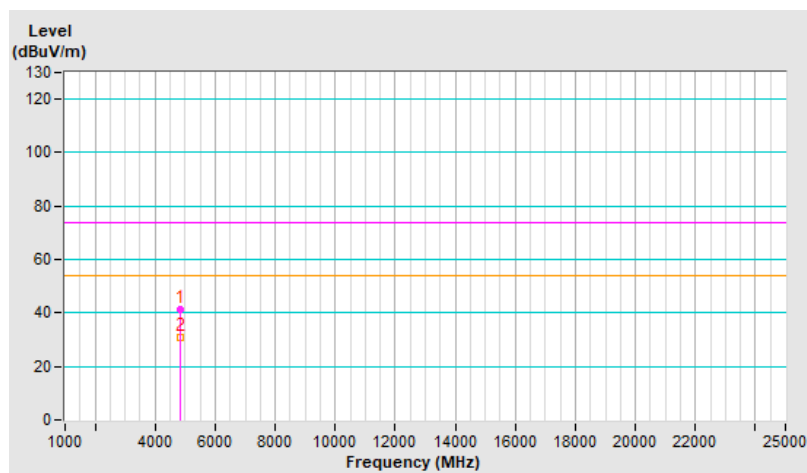




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.7 PK	74.0	-31.3	2.56 V	265	38.2	4.5
2	4824.00	30.6 AV	54.0	-23.4	2.56 V	265	26.1	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

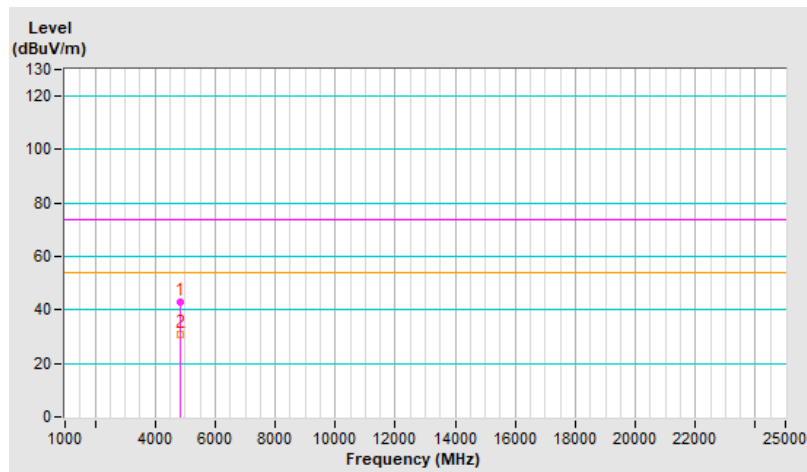




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.3 PK	74.0	-32.7	1.85 H	282	36.8	4.5
2	4874.00	31.2 AV	54.0	-22.8	1.85 H	282	26.7	4.5
3	7311.00	47.0 PK	74.0	-27.0	2.46 H	296	35.5	11.5
4	7311.00	33.4 AV	54.0	-20.6	2.46 H	296	21.9	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

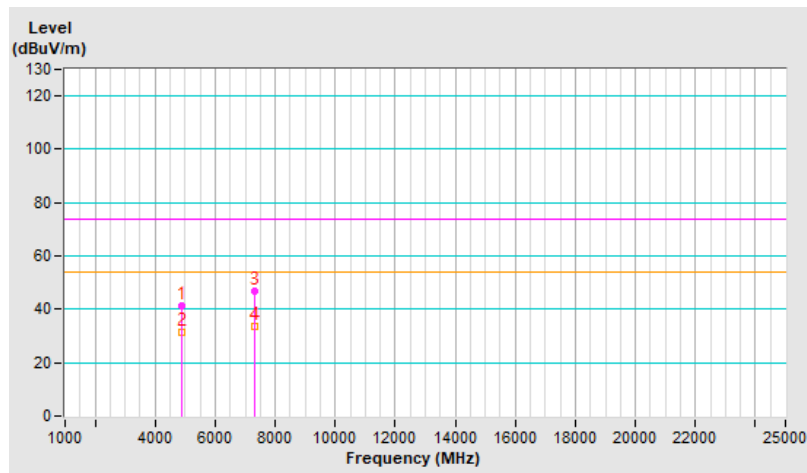


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.8 PK	74.0	-32.2	2.56 V	280	37.3	4.5
2	4874.00	29.9 AV	54.0	-24.1	2.56 V	280	25.4	4.5
3	7311.00	43.8 PK	74.0	-30.2	1.91 V	273	32.3	11.5
4	7311.00	33.0 AV	54.0	-21.0	1.91 V	273	21.5	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

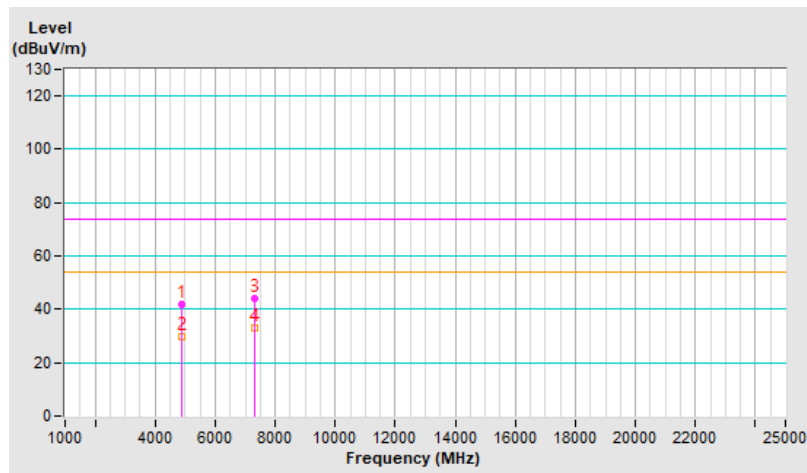


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.4 PK	74.0	-33.6	1.79 H	275	35.8	4.6
2	4924.00	30.3 AV	54.0	-23.7	1.79 H	275	25.7	4.6
3	7386.00	47.8 PK	74.0	-26.2	2.50 H	307	35.8	12.0
4	7386.00	33.8 AV	54.0	-20.2	2.50 H	307	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

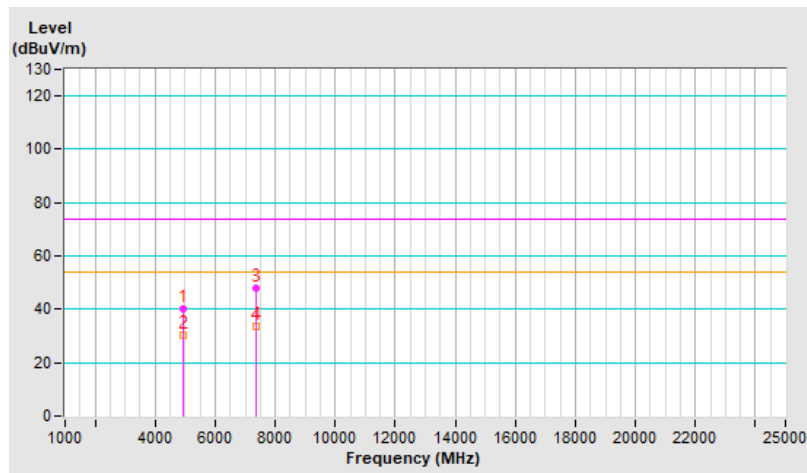




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	2.58 V	297	37.8	4.6
2	4924.00	30.4 AV	54.0	-23.6	2.58 V	297	25.8	4.6
3	7386.00	43.6 PK	74.0	-30.4	1.95 V	256	31.6	12.0
4	7386.00	33.1 AV	54.0	-20.9	1.95 V	256	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

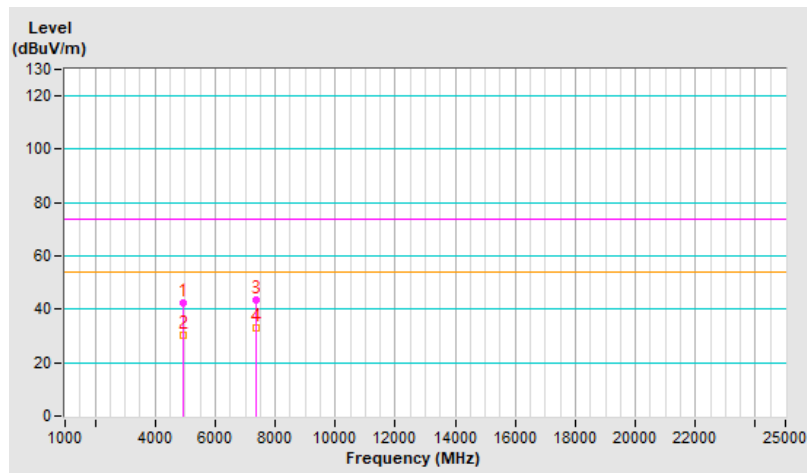


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.5 PK	74.0	-33.5	1.79 H	292	35.9	4.6
2	4934.00	30.4 AV	54.0	-23.6	1.79 H	292	25.8	4.6
3	7401.00	48.1 PK	74.0	-25.9	2.52 H	305	36.1	12.0
4	7401.00	33.7 AV	54.0	-20.3	2.52 H	305	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

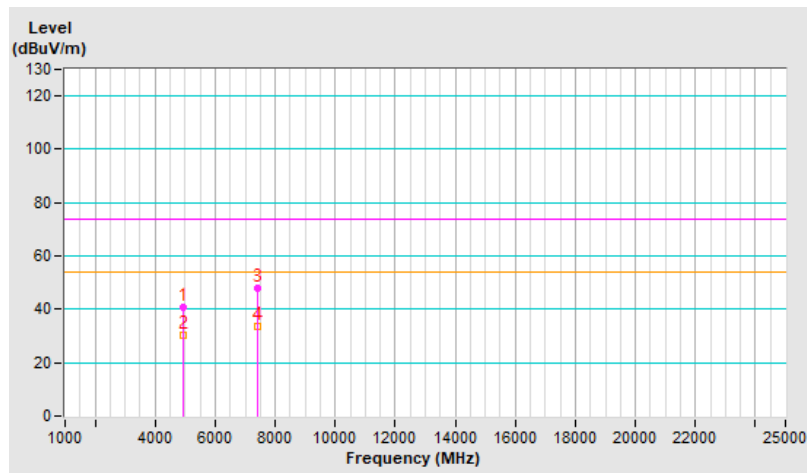


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.5 PK	74.0	-31.5	2.54 V	283	37.9	4.6
2	4934.00	30.3 AV	54.0	-23.7	2.54 V	283	25.7	4.6
3	7401.00	43.8 PK	74.0	-30.2	1.93 V	263	31.8	12.0
4	7401.00	32.9 AV	54.0	-21.1	1.93 V	263	20.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

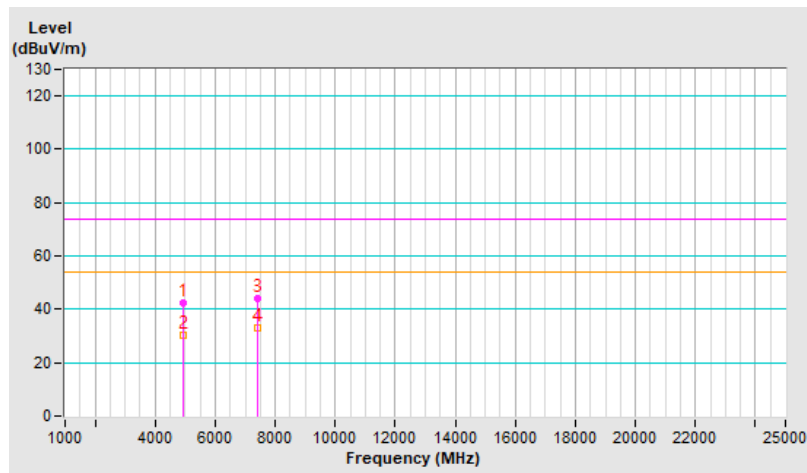




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.9 PK	74.0	-33.1	1.80 H	273	36.2	4.7
2	4944.00	30.9 AV	54.0	-23.1	1.80 H	273	26.2	4.7
3	7416.00	47.3 PK	74.0	-26.7	2.51 H	288	35.3	12.0
4	7416.00	33.2 AV	54.0	-20.8	2.51 H	288	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

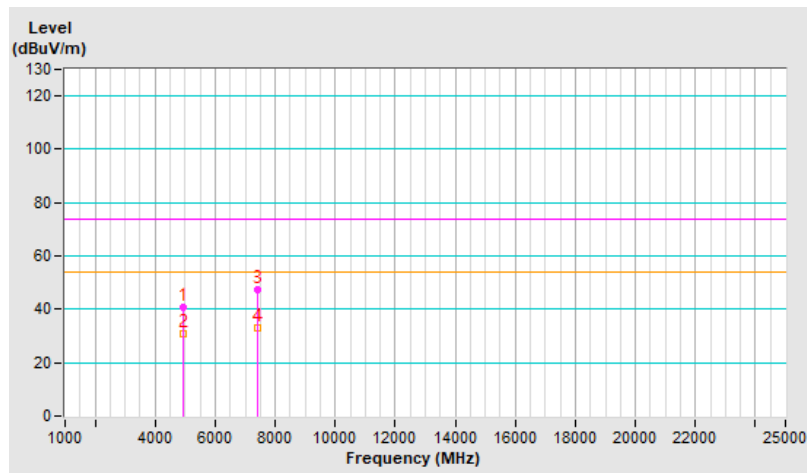


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.7 PK	74.0	-32.3	2.60 V	292	37.0	4.7
2	4944.00	29.7 AV	54.0	-24.3	2.60 V	292	25.0	4.7
3	7416.00	43.3 PK	74.0	-30.7	1.96 V	270	31.3	12.0
4	7416.00	32.7 AV	54.0	-21.3	1.96 V	270	20.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

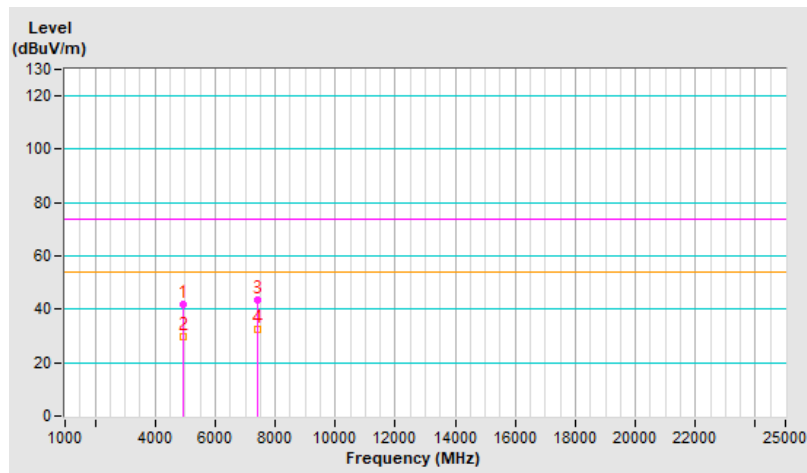




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.0 PK	74.0	-33.0	1.74 H	288	36.5	4.5
2	4824.00	30.8 AV	54.0	-23.2	1.74 H	288	26.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

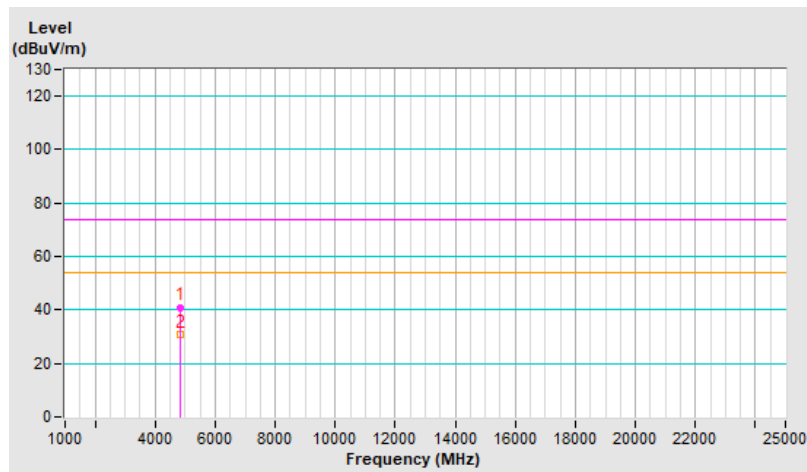


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.2 PK	74.0	-31.8	2.50 V	297	37.7	4.5
2	4824.00	30.0 AV	54.0	-24.0	2.50 V	297	25.5	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

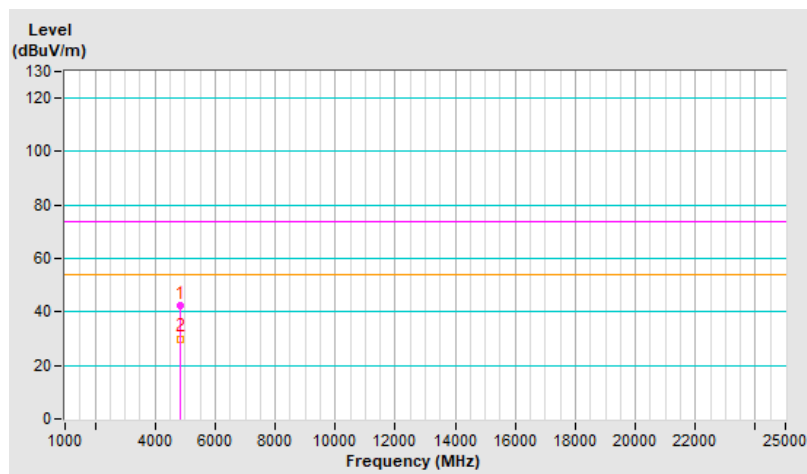


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.4 PK	74.0	-33.6	1.78 H	264	35.9	4.5
2	4874.00	30.5 AV	54.0	-23.5	1.78 H	264	26.0	4.5
3	7311.00	47.3 PK	74.0	-26.7	2.48 H	294	35.8	11.5
4	7311.00	33.9 AV	54.0	-20.1	2.48 H	294	22.4	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

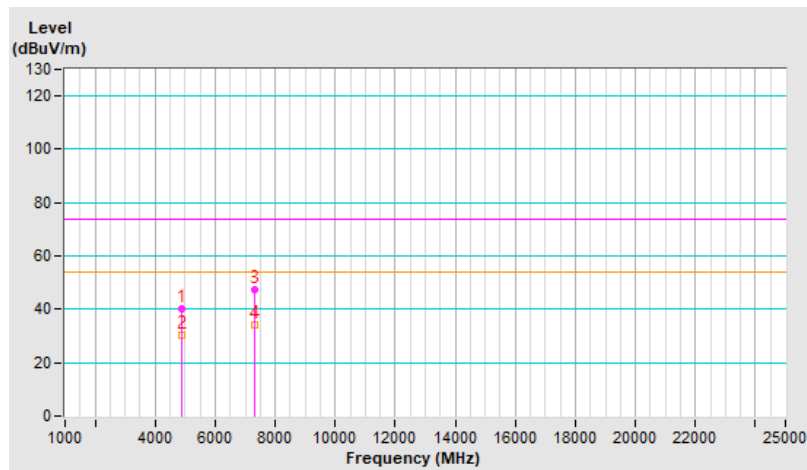


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.9 PK	74.0	-31.1	2.55 V	289	38.4	4.5
2	4874.00	30.7 AV	54.0	-23.3	2.55 V	289	26.2	4.5
3	7311.00	44.0 PK	74.0	-30.0	1.94 V	273	32.5	11.5
4	7311.00	33.2 AV	54.0	-20.8	1.94 V	273	21.7	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

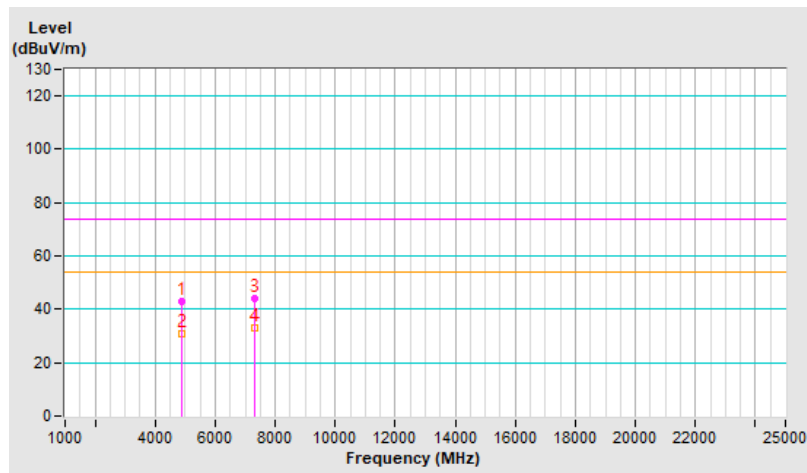


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.7 PK	74.0	-33.3	1.76 H	280	36.1	4.6
2	4924.00	30.8 AV	54.0	-23.2	1.76 H	280	26.2	4.6
3	7386.00	47.3 PK	74.0	-26.7	2.48 H	301	35.3	12.0
4	7386.00	34.0 AV	54.0	-20.0	2.48 H	301	22.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

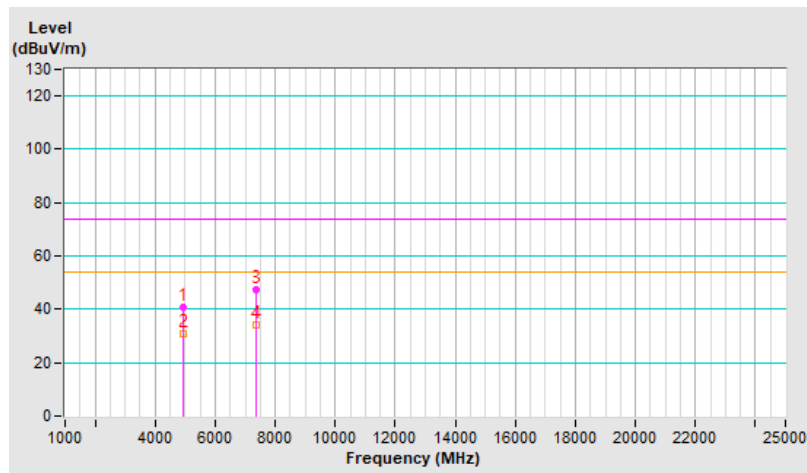


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.9 PK	74.0	-31.1	2.49 V	276	38.3	4.6
2	4924.00	30.8 AV	54.0	-23.2	2.49 V	276	26.2	4.6
3	7386.00	44.1 PK	74.0	-29.9	1.89 V	264	32.1	12.0
4	7386.00	33.3 AV	54.0	-20.7	1.89 V	264	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

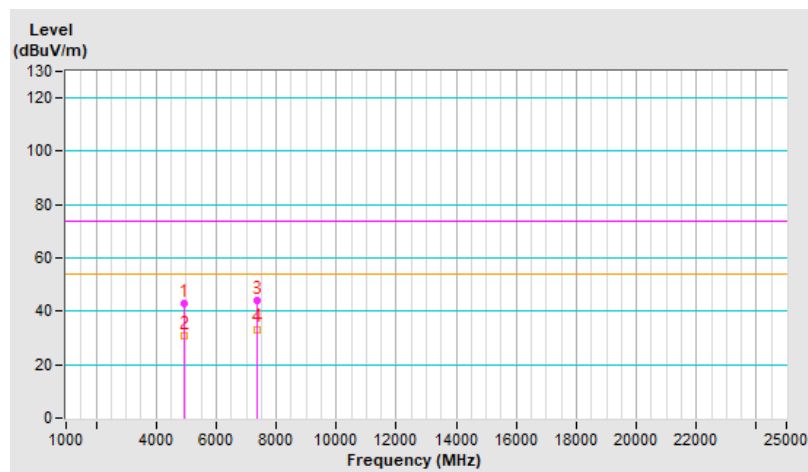


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.3 PK	74.0	-32.7	1.77 H	275	36.7	4.6
2	4934.00	31.1 AV	54.0	-22.9	1.77 H	275	26.5	4.6
3	7401.00	47.5 PK	74.0	-26.5	2.45 H	290	35.5	12.0
4	7401.00	33.5 AV	54.0	-20.5	2.45 H	290	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

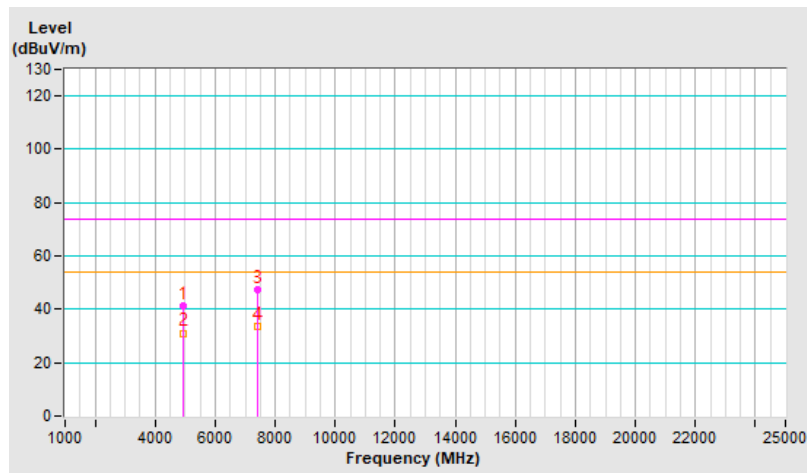


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	43.3 PK	74.0	-30.7	2.55 V	284	38.7	4.6
2	4934.00	31.0 AV	54.0	-23.0	2.55 V	284	26.4	4.6
3	7401.00	43.5 PK	74.0	-30.5	1.89 V	287	31.5	12.0
4	7401.00	32.7 AV	54.0	-21.3	1.89 V	287	20.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

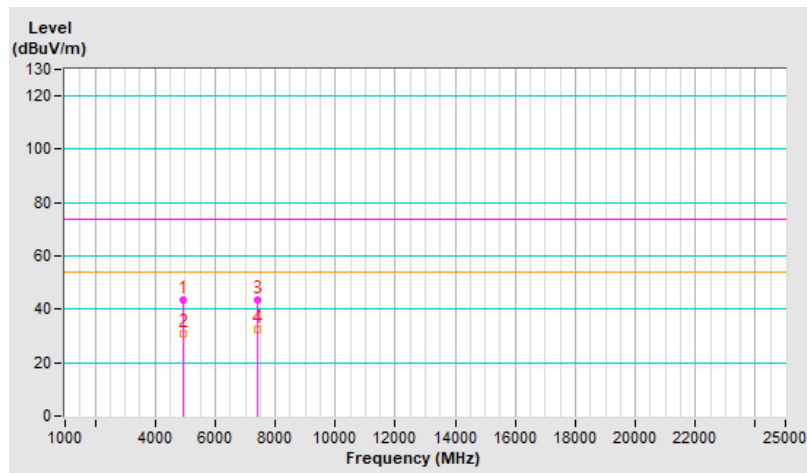




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.6 PK	74.0	-33.4	1.79 H	270	35.9	4.7
2	4944.00	30.4 AV	54.0	-23.6	1.79 H	270	25.7	4.7
3	7416.00	47.7 PK	74.0	-26.3	2.57 H	298	35.7	12.0
4	7416.00	33.9 AV	54.0	-20.1	2.57 H	298	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

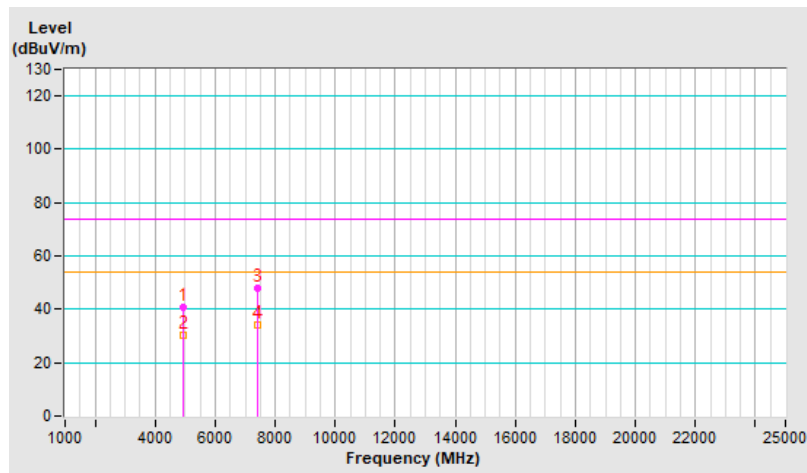




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.9 PK	74.0	-31.1	2.51 V	297	38.2	4.7
2	4944.00	30.7 AV	54.0	-23.3	2.51 V	297	26.0	4.7
3	7416.00	43.9 PK	74.0	-30.1	1.88 V	263	31.9	12.0
4	7416.00	33.3 AV	54.0	-20.7	1.88 V	263	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

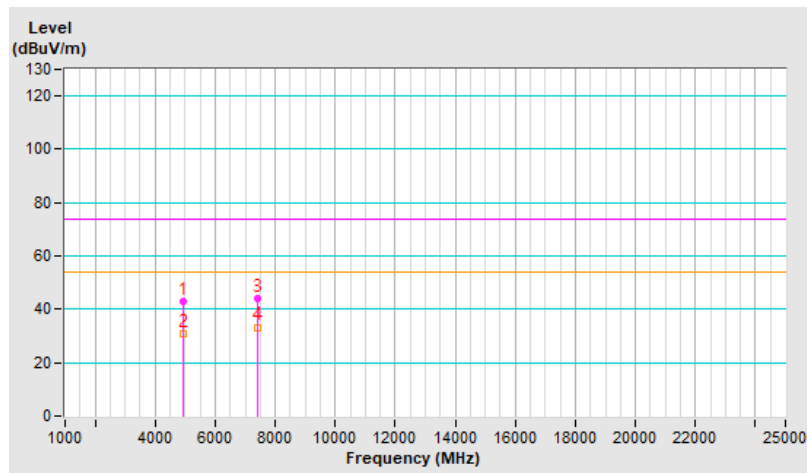


**For 2TX**

<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.4 PK	74.0	-32.6	1.77 H	273	36.9	4.5
2	4824.00	31.2 AV	54.0	-22.8	1.77 H	273	26.7	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

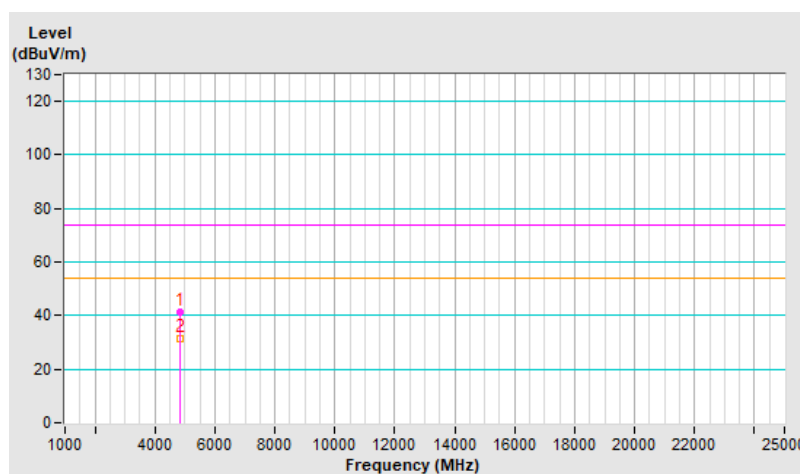




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.5 PK	74.0	-32.5	2.39 V	263	37.0	4.5
2	4824.00	30.4 AV	54.0	-23.6	2.39 V	263	25.9	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

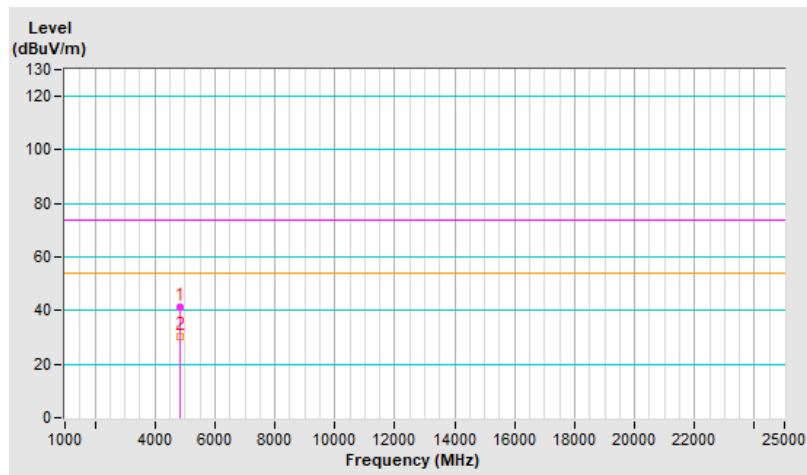


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.0 PK	74.0	-32.0	1.74 H	267	37.5	4.5
2	4874.00	30.5 AV	54.0	-23.5	1.74 H	267	26.0	4.5
3	7311.00	45.5 PK	74.0	-28.5	2.49 H	277	34.0	11.5
4	7311.00	33.5 AV	54.0	-20.5	2.49 H	277	22.0	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

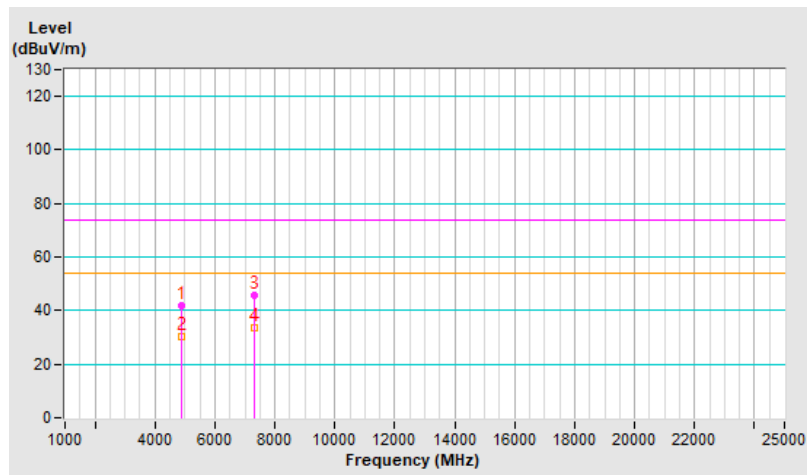


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.6 PK	74.0	-31.4	2.49 V	266	38.1	4.5
2	4874.00	30.8 AV	54.0	-23.2	2.49 V	266	26.3	4.5
3	7311.00	45.4 PK	74.0	-28.6	1.97 V	247	33.9	11.5
4	7311.00	33.1 AV	54.0	-20.9	1.97 V	247	21.6	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

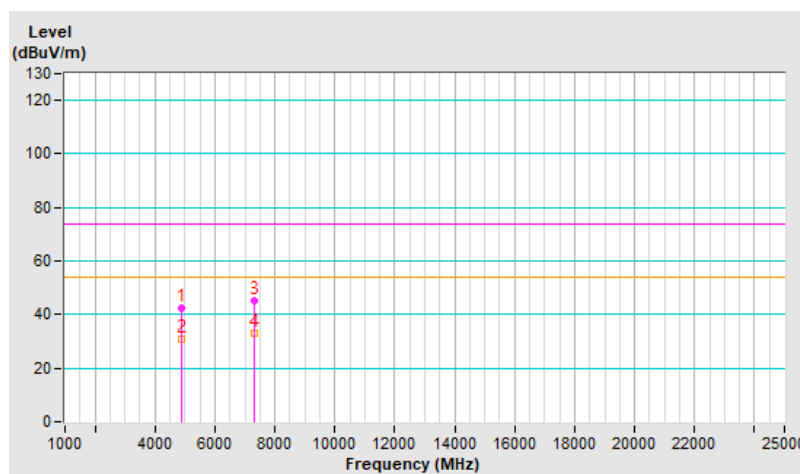


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.9 PK	74.0	-32.1	1.75 H	267	37.3	4.6
2	4924.00	30.2 AV	54.0	-23.8	1.75 H	267	25.6	4.6
3	7386.00	45.3 PK	74.0	-28.7	2.49 H	263	33.3	12.0
4	7386.00	33.2 AV	54.0	-20.8	2.49 H	263	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

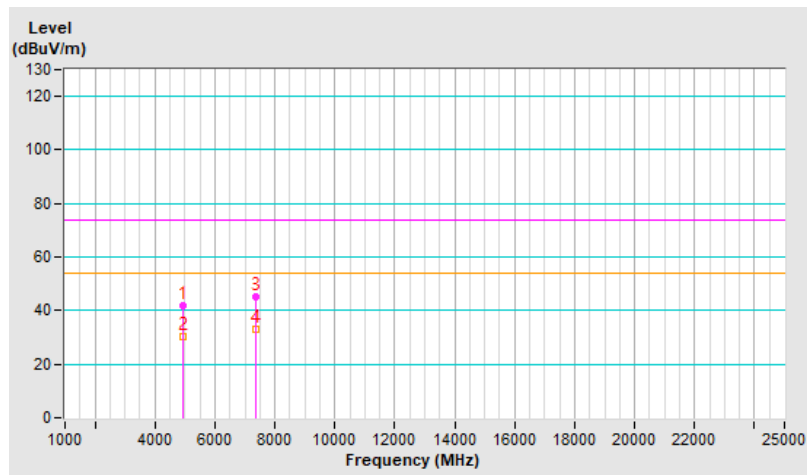


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.5 PK	74.0	-31.5	2.45 V	267	37.9	4.6
2	4924.00	30.5 AV	54.0	-23.5	2.45 V	267	25.9	4.6
3	7386.00	45.0 PK	74.0	-29.0	1.92 V	235	33.0	12.0
4	7386.00	33.5 AV	54.0	-20.5	1.92 V	235	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

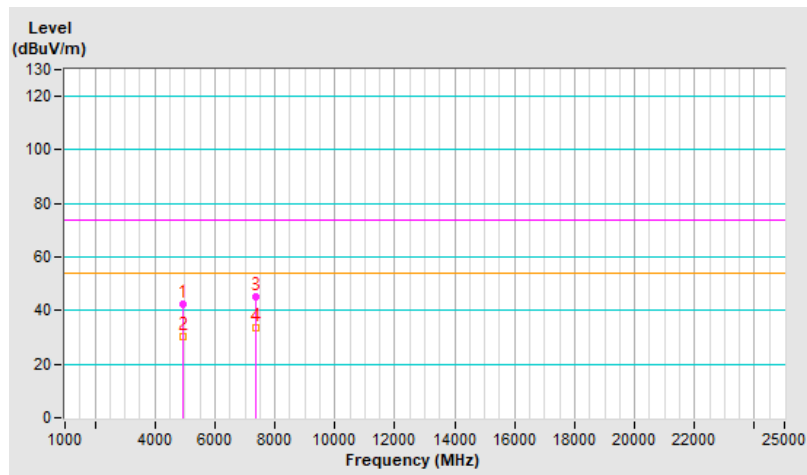




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.1 PK	74.0	-31.9	1.77 H	270	37.5	4.6
2	4934.00	30.3 AV	54.0	-23.7	1.77 H	270	25.7	4.6
3	7401.00	45.7 PK	74.0	-28.3	2.49 H	271	33.7	12.0
4	7401.00	33.8 AV	54.0	-20.2	2.49 H	271	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

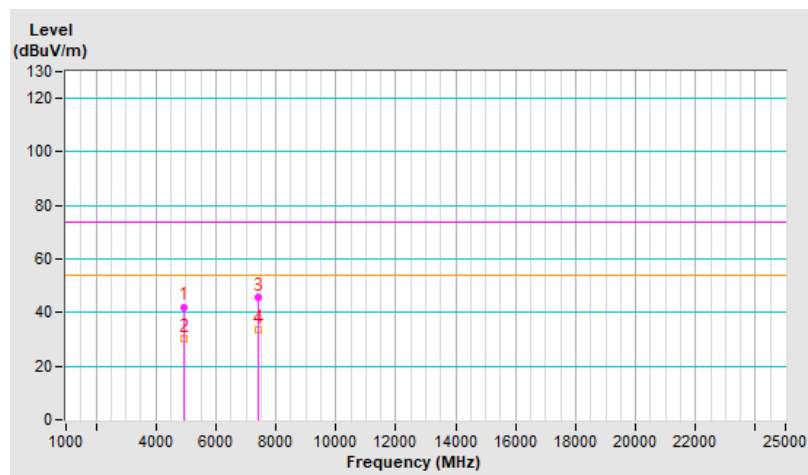


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.7 PK	74.0	-31.3	2.50 V	259	38.1	4.6
2	4934.00	31.1 AV	54.0	-22.9	2.50 V	259	26.5	4.6
3	7401.00	45.0 PK	74.0	-29.0	1.95 V	256	33.0	12.0
4	7401.00	33.9 AV	54.0	-20.1	1.95 V	256	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

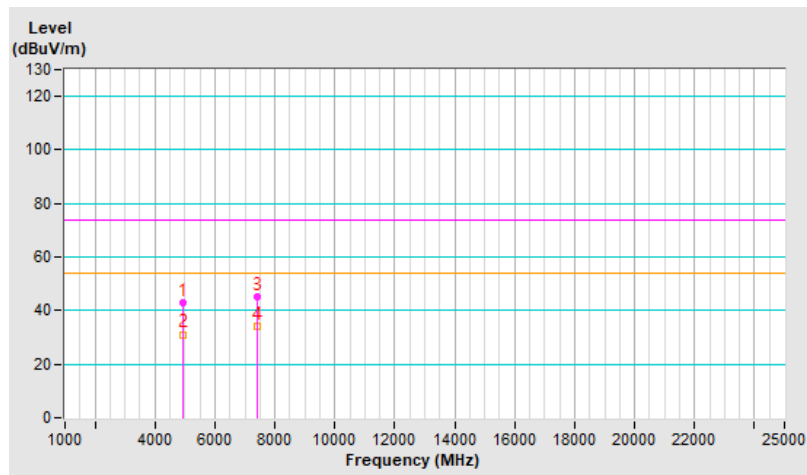


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.8 PK	74.0	-32.2	1.72 H	269	37.1	4.7
2	4944.00	30.1 AV	54.0	-23.9	1.72 H	269	25.4	4.7
3	7416.00	45.4 PK	74.0	-28.6	2.46 H	275	33.4	12.0
4	7416.00	33.4 AV	54.0	-20.6	2.46 H	275	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

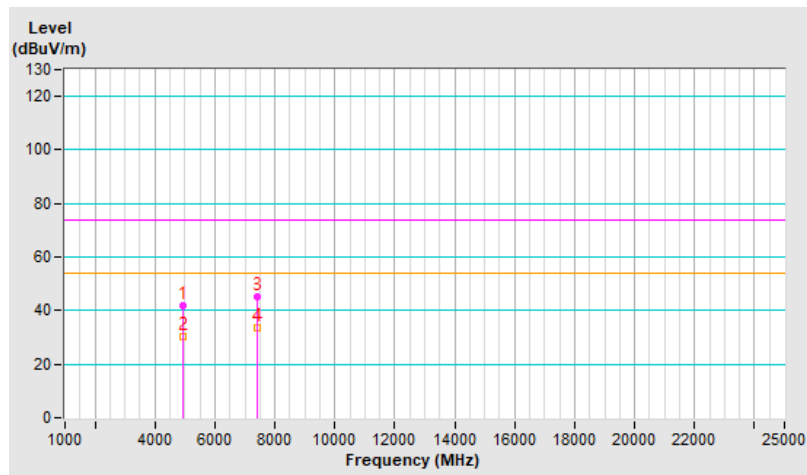




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.2 PK	74.0	-31.8	2.52 V	276	37.5	4.7
2	4944.00	30.5 AV	54.0	-23.5	2.52 V	276	25.8	4.7
3	7416.00	44.9 PK	74.0	-29.1	2.00 V	249	32.9	12.0
4	7416.00	33.8 AV	54.0	-20.2	2.00 V	249	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

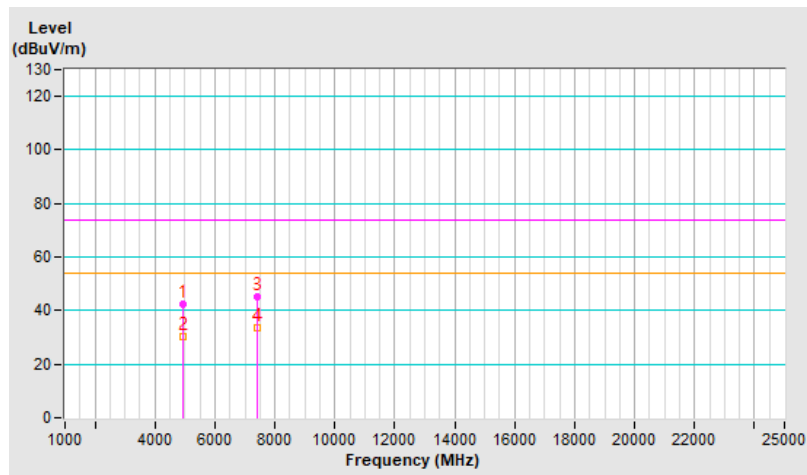


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.3 PK	74.0	-32.7	1.76 H	250	36.8	4.5
2	4824.00	31.8 AV	54.0	-22.2	1.76 H	250	27.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

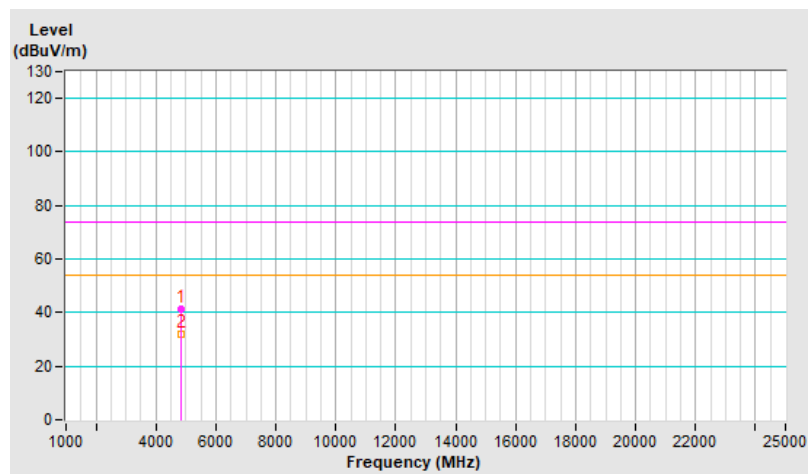




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.2 PK	74.0	-32.8	2.33 V	245	36.7	4.5
2	4824.00	30.0 AV	54.0	-24.0	2.33 V	245	25.5	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

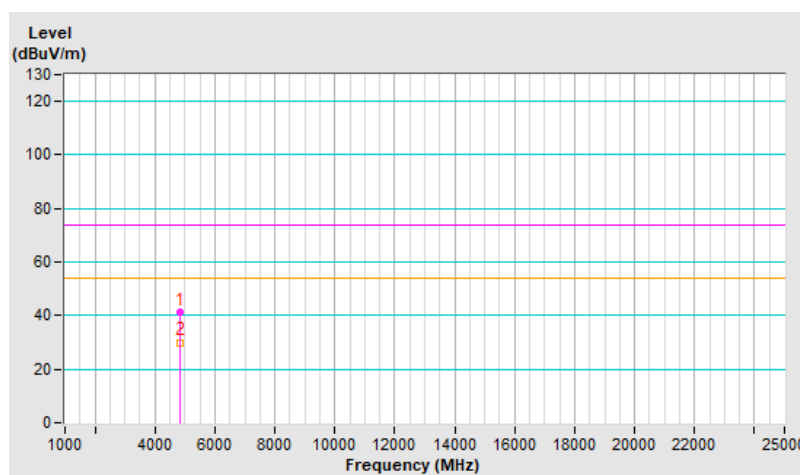


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.5 PK	74.0	-33.5	1.68 H	291	36.0	4.5
2	4874.00	30.5 AV	54.0	-23.5	1.68 H	291	26.0	4.5
3	7311.00	46.1 PK	74.0	-27.9	2.46 H	303	34.6	11.5
4	7311.00	33.5 AV	54.0	-20.5	2.46 H	303	22.0	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

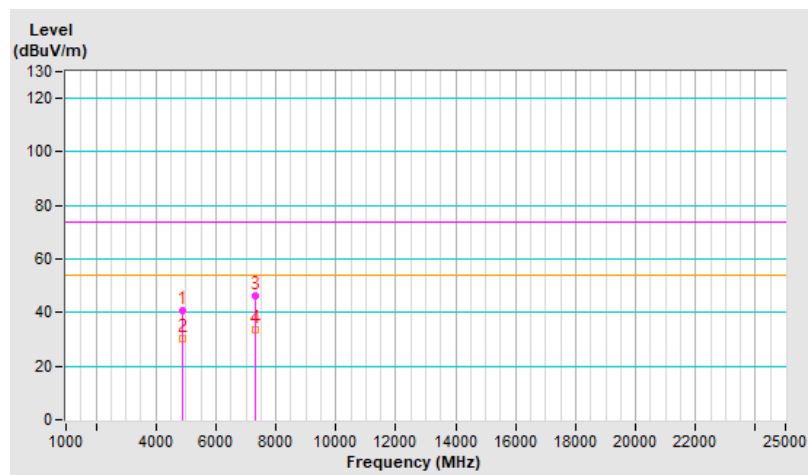


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.6 PK	74.0	-32.4	2.46 V	283	37.1	4.5
2	4874.00	30.3 AV	54.0	-23.7	2.46 V	283	25.8	4.5
3	7311.00	45.6 PK	74.0	-28.4	2.01 V	240	34.1	11.5
4	7311.00	33.6 AV	54.0	-20.4	2.01 V	240	22.1	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

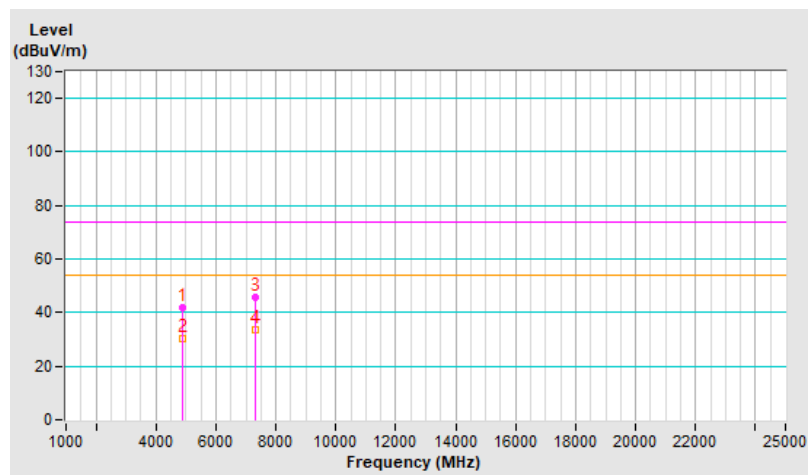




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.8 PK	74.0	-32.2	1.62 H	294	37.2	4.6
2	4924.00	29.8 AV	54.0	-24.2	1.62 H	294	25.2	4.6
3	7386.00	44.4 PK	74.0	-29.6	2.42 H	315	32.4	12.0
4	7386.00	33.2 AV	54.0	-20.8	2.42 H	315	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

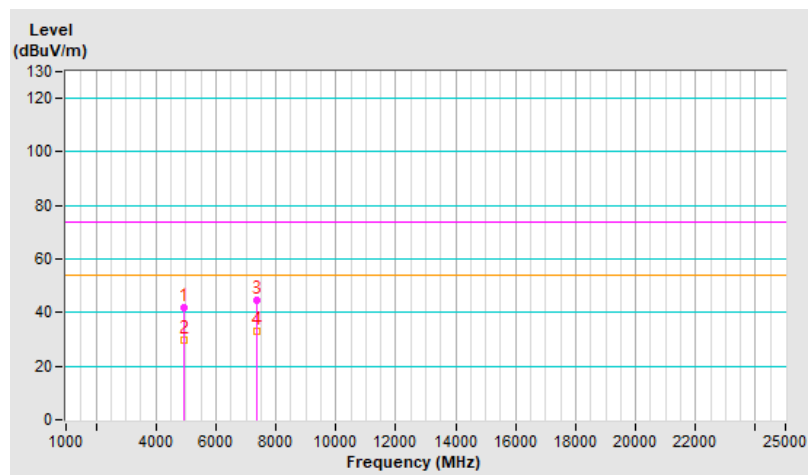




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.3 PK	74.0	-31.7	2.46 V	272	37.7	4.6
2	4924.00	30.1 AV	54.0	-23.9	2.46 V	272	25.5	4.6
3	7386.00	44.5 PK	74.0	-29.5	1.97 V	239	32.5	12.0
4	7386.00	33.4 AV	54.0	-20.6	1.97 V	239	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

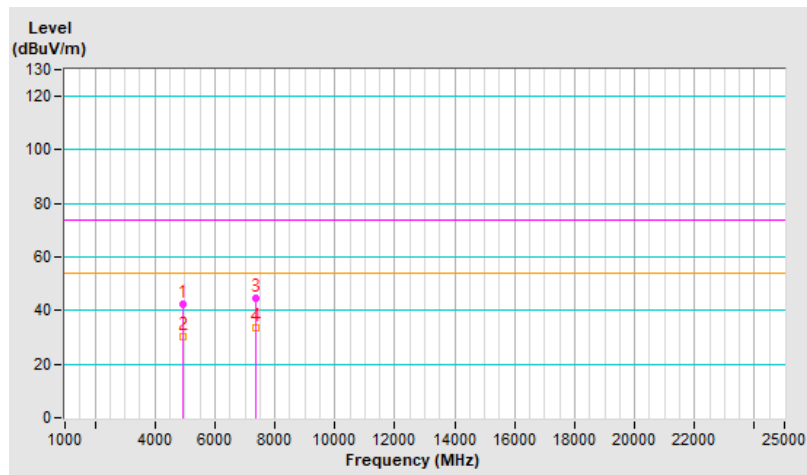


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.3 PK	74.0	-31.7	1.68 H	280	37.7	4.6
2	4934.00	30.2 AV	54.0	-23.8	1.68 H	280	25.6	4.6
3	7401.00	44.6 PK	74.0	-29.4	2.41 H	308	32.6	12.0
4	7401.00	33.5 AV	54.0	-20.5	2.41 H	308	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

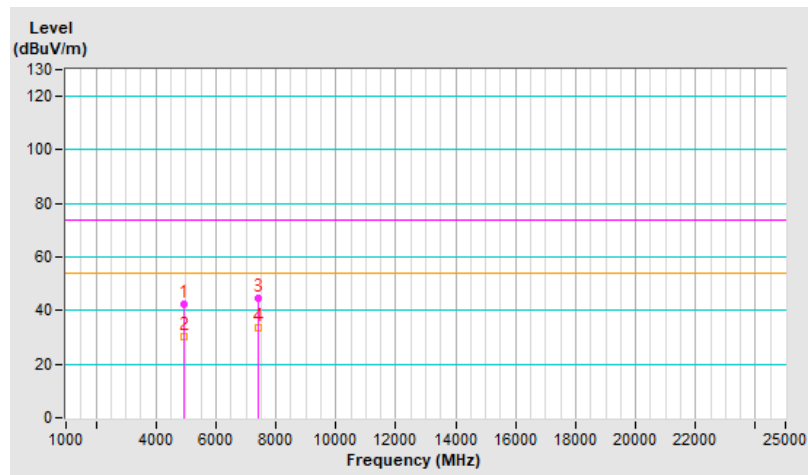




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.6 PK	74.0	-31.4	2.43 V	288	38.0	4.6
2	4934.00	30.5 AV	54.0	-23.5	2.43 V	288	25.9	4.6
3	7401.00	44.9 PK	74.0	-29.1	1.95 V	237	32.9	12.0
4	7401.00	33.7 AV	54.0	-20.3	1.95 V	237	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

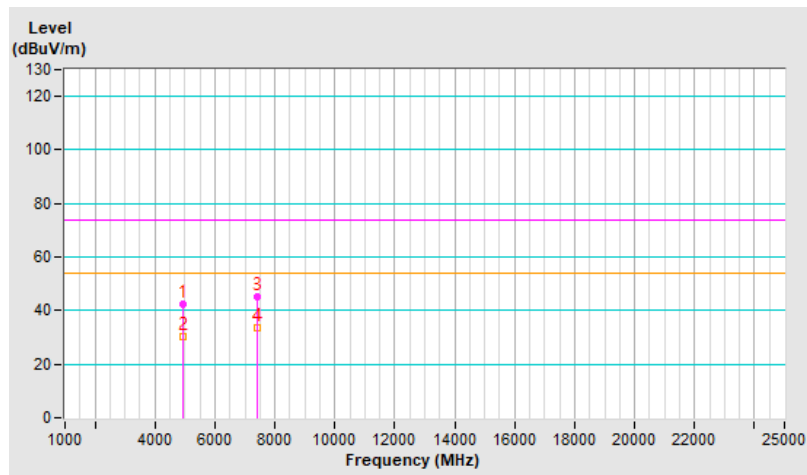


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.9 PK	74.0	-32.1	1.61 H	283	37.2	4.7
2	4944.00	29.8 AV	54.0	-24.2	1.61 H	283	25.1	4.7
3	7416.00	44.9 PK	74.0	-29.1	2.44 H	315	32.9	12.0
4	7416.00	33.7 AV	54.0	-20.3	2.44 H	315	21.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

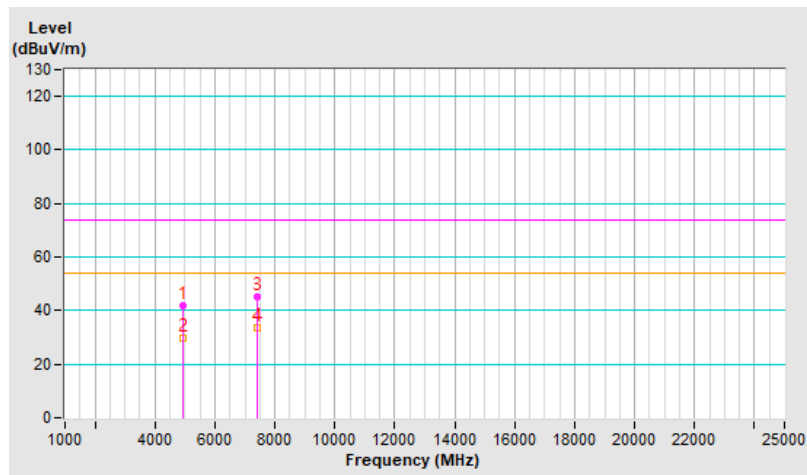


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.9 PK	74.0	-31.1	2.49 V	299	38.2	4.7
2	4944.00	30.5 AV	54.0	-23.5	2.49 V	299	25.8	4.7
3	7416.00	44.3 PK	74.0	-29.7	1.96 V	247	32.3	12.0
4	7416.00	33.1 AV	54.0	-20.9	1.96 V	247	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

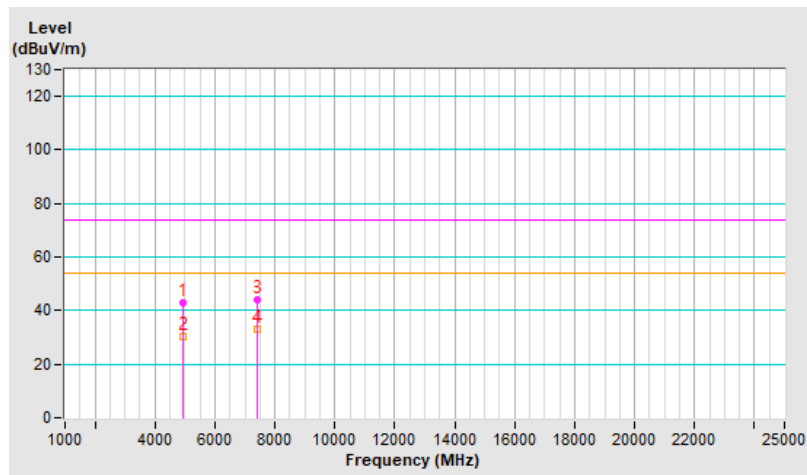


**For 2S2T**

<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

<b>Antenna Polarity &amp; Test Distance : Horizontal at 3 m</b>								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.6 PK	74.0	-32.4	1.67 H	256	37.1	4.5
2	4824.00	31.1 AV	54.0	-22.9	1.67 H	256	26.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

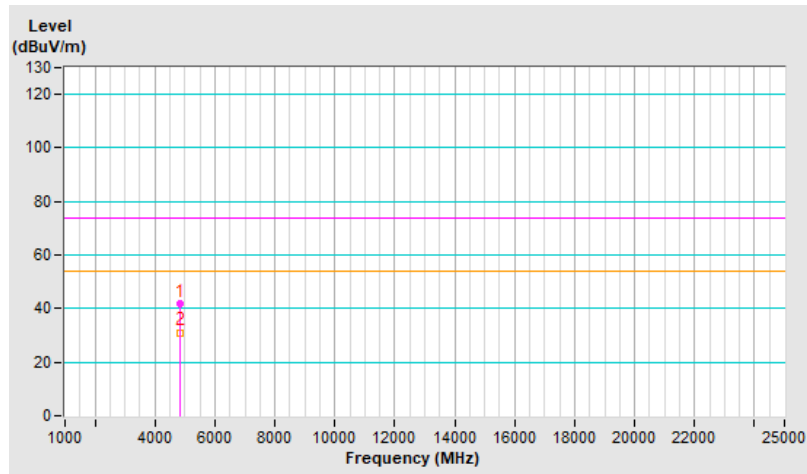


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.6 PK	74.0	-31.4	2.47 V	294	38.1	4.5
2	4824.00	31.1 AV	54.0	-22.9	2.47 V	294	26.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

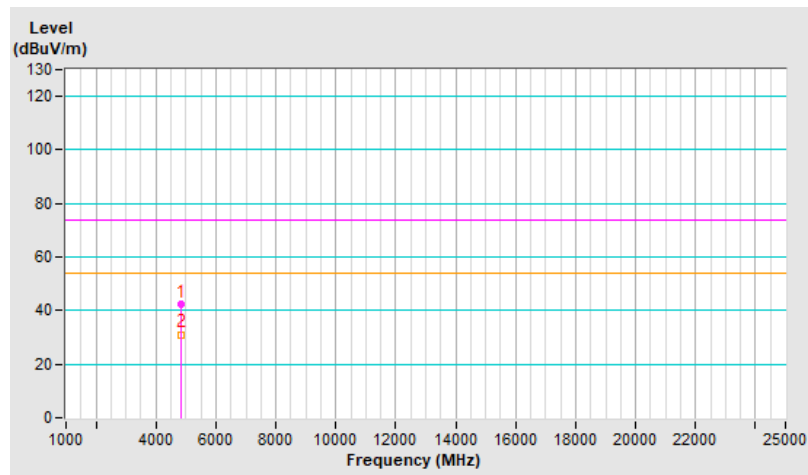




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.4 PK	74.0	-31.6	1.76 H	260	37.9	4.5
2	4874.00	30.7 AV	54.0	-23.3	1.76 H	260	26.2	4.5
3	7311.00	44.6 PK	74.0	-29.4	2.54 H	294	33.1	11.5
4	7311.00	33.7 AV	54.0	-20.3	2.54 H	294	22.2	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

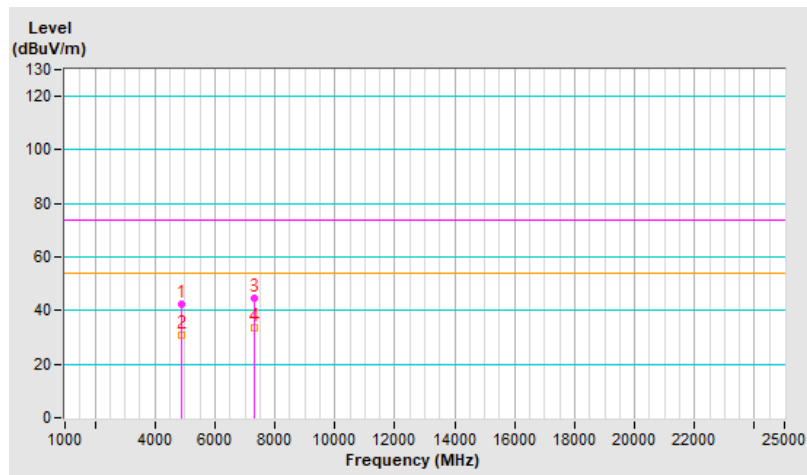


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.0 PK	74.0	-32.0	2.46 V	298	37.5	4.5
2	4874.00	30.7 AV	54.0	-23.3	2.46 V	298	26.2	4.5
3	7311.00	44.5 PK	74.0	-29.5	2.02 V	216	33.0	11.5
4	7311.00	33.2 AV	54.0	-20.8	2.02 V	216	21.7	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

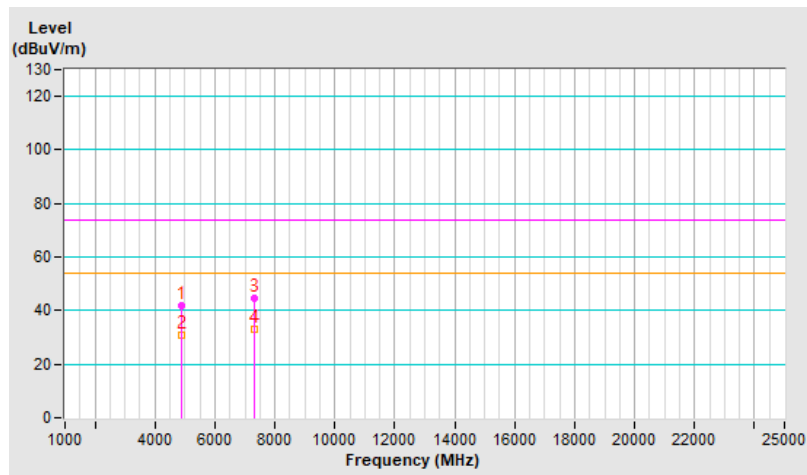




<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.4 PK	74.0	-31.6	1.71 H	265	37.8	4.6
2	4924.00	30.8 AV	54.0	-23.2	1.71 H	265	26.2	4.6
3	7386.00	44.2 PK	74.0	-29.8	2.40 H	288	32.2	12.0
4	7386.00	33.4 AV	54.0	-20.6	2.40 H	288	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

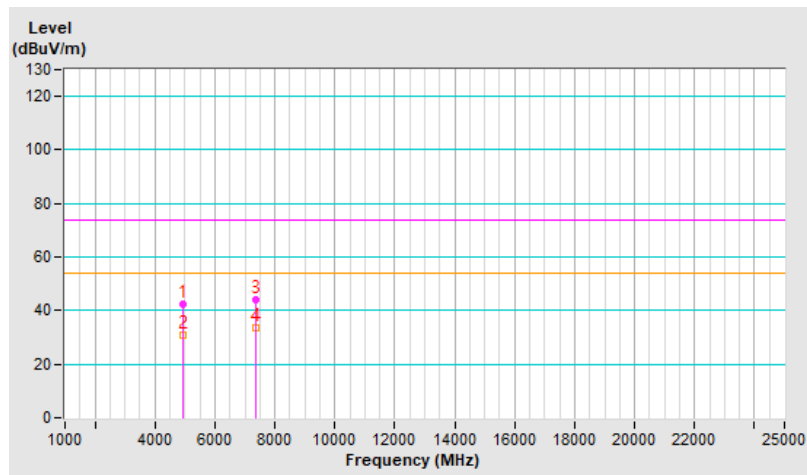


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.5 PK	74.0	-32.5	2.45 V	302	36.9	4.6
2	4924.00	30.0 AV	54.0	-24.0	2.45 V	302	25.4	4.6
3	7386.00	44.4 PK	74.0	-29.6	2.06 V	225	32.4	12.0
4	7386.00	33.8 AV	54.0	-20.2	2.06 V	225	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

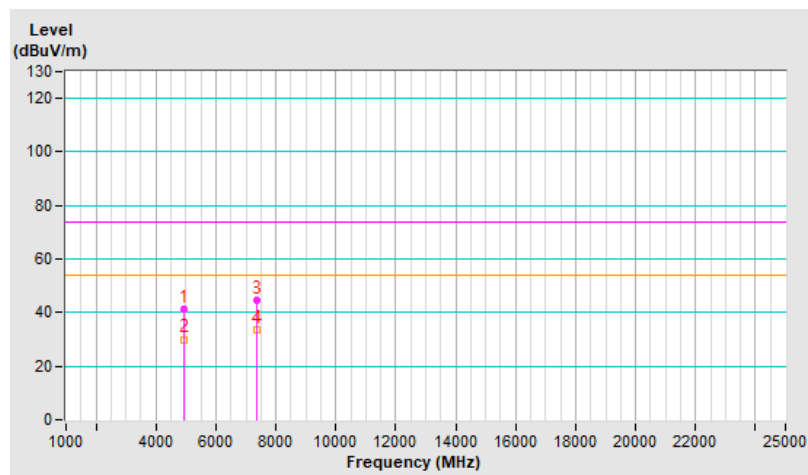


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.0 PK	74.0	-32.0	1.68 H	266	37.4	4.6
2	4934.00	30.7 AV	54.0	-23.3	1.68 H	266	26.1	4.6
3	7401.00	44.4 PK	74.0	-29.6	2.37 H	289	32.4	12.0
4	7401.00	33.6 AV	54.0	-20.4	2.37 H	289	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

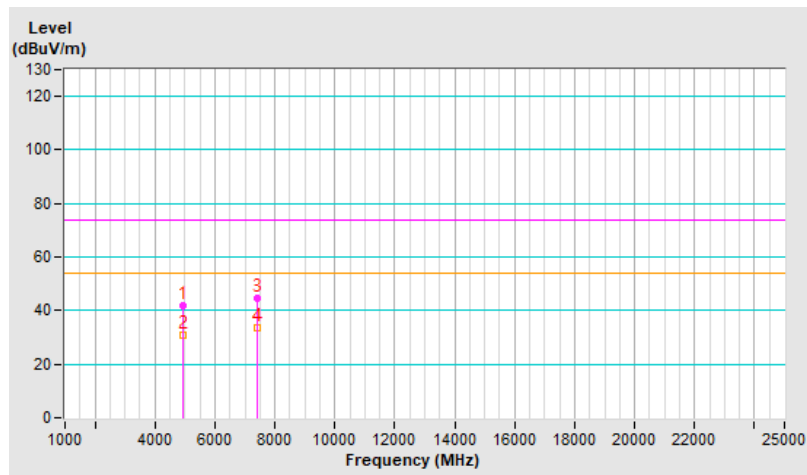


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.7 PK	74.0	-31.3	2.47 V	295	38.1	4.6
2	4934.00	31.2 AV	54.0	-22.8	2.47 V	295	26.6	4.6
3	7401.00	44.6 PK	74.0	-29.4	2.03 V	233	32.6	12.0
4	7401.00	33.4 AV	54.0	-20.6	2.03 V	233	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

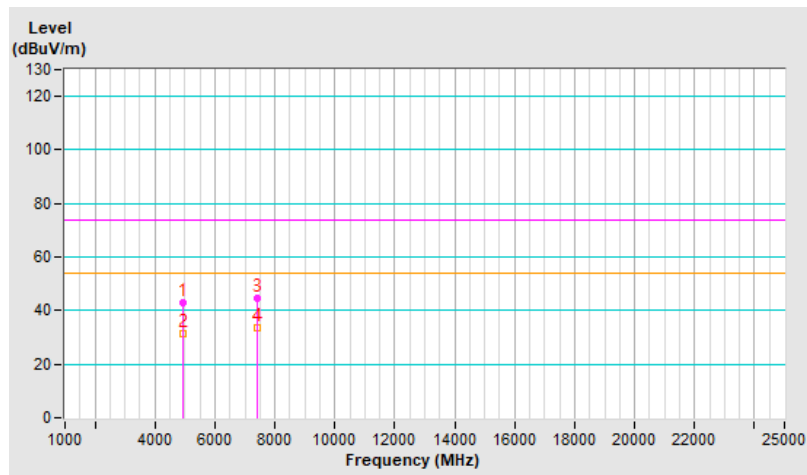


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.1 PK	74.0	-31.9	1.76 H	254	37.4	4.7
2	4944.00	30.7 AV	54.0	-23.3	1.76 H	254	26.0	4.7
3	7416.00	44.5 PK	74.0	-29.5	2.40 H	294	32.5	12.0
4	7416.00	33.5 AV	54.0	-20.5	2.40 H	294	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

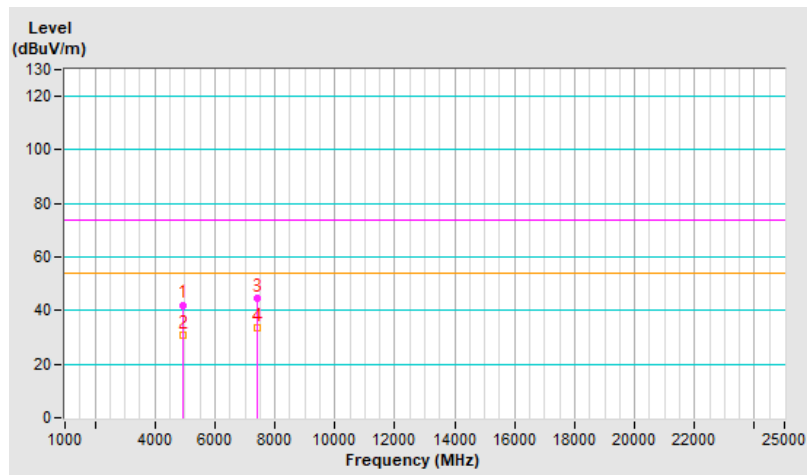


<b>RF Mode</b>	802.11be (EHT20)	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.3 PK	74.0	-31.7	2.55 V	290	37.6	4.7
2	4944.00	31.0 AV	54.0	-23.0	2.55 V	290	26.3	4.7
3	7416.00	45.1 PK	74.0	-28.9	2.05 V	217	33.1	12.0
4	7416.00	33.6 AV	54.0	-20.4	2.05 V	217	21.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

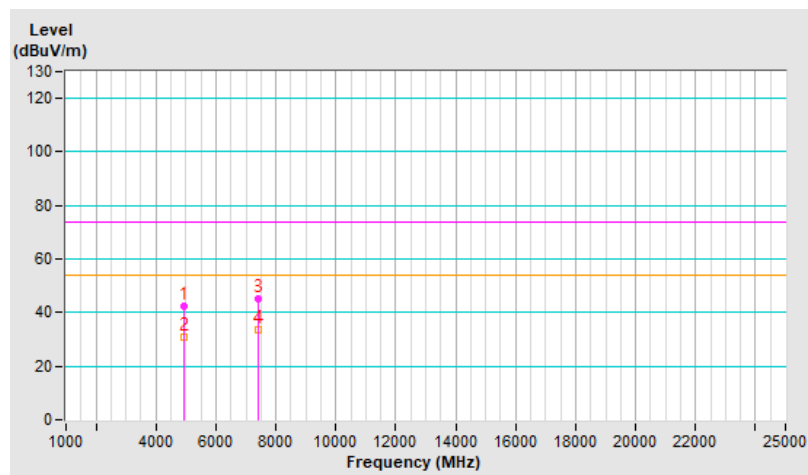




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	40.9 PK	74.0	-33.1	1.64 H	259	36.4	4.5
2	4844.00	31.0 AV	54.0	-23.0	1.64 H	259	26.5	4.5
3	7266.00	46.5 PK	74.0	-27.5	2.40 H	278	35.2	11.3
4	7266.00	33.8 AV	54.0	-20.2	2.40 H	278	22.5	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

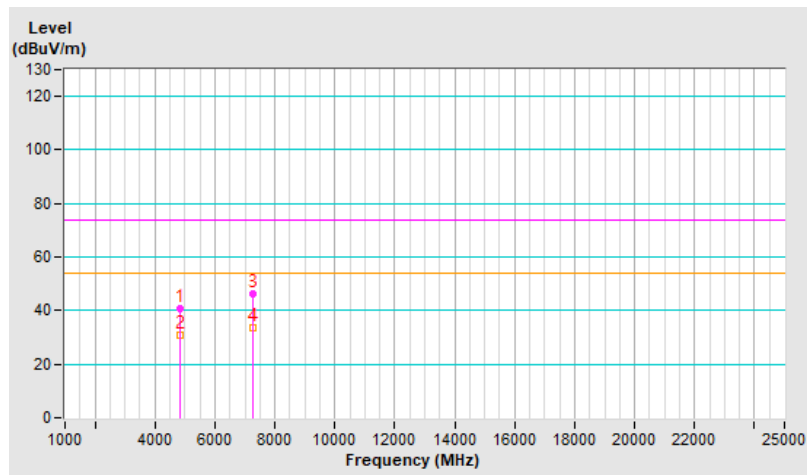


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4844.00	43.1 PK	74.0	-30.9	2.42 V	283	38.6	4.5
2	4844.00	31.0 AV	54.0	-23.0	2.42 V	283	26.5	4.5
3	7266.00	45.2 PK	74.0	-28.8	1.94 V	238	33.9	11.3
4	7266.00	33.9 AV	54.0	-20.1	1.94 V	238	22.6	11.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

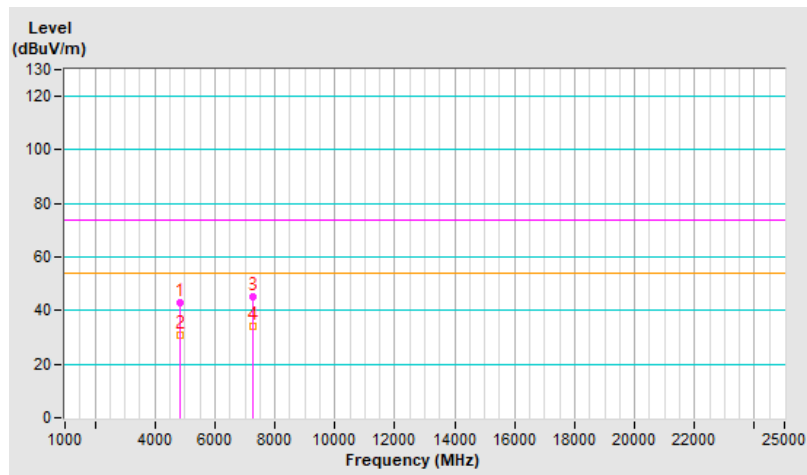




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	1.69 H	272	36.4	4.5
2	4874.00	30.9 AV	54.0	-23.1	1.69 H	272	26.4	4.5
3	7311.00	46.4 PK	74.0	-27.6	2.49 H	294	34.9	11.5
4	7311.00	33.7 AV	54.0	-20.3	2.49 H	294	22.2	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

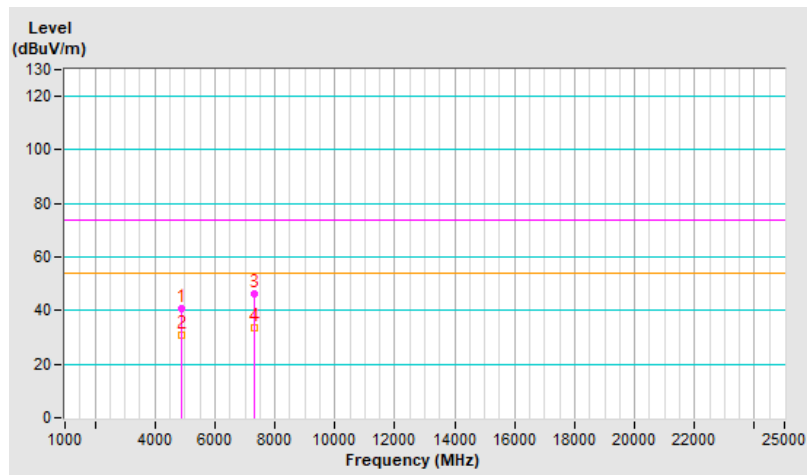




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.8 PK	74.0	-31.2	2.46 V	297	38.3	4.5
2	4874.00	30.8 AV	54.0	-23.2	2.46 V	297	26.3	4.5
3	7311.00	44.7 PK	74.0	-29.3	1.97 V	237	33.2	11.5
4	7311.00	33.9 AV	54.0	-20.1	1.97 V	237	22.4	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

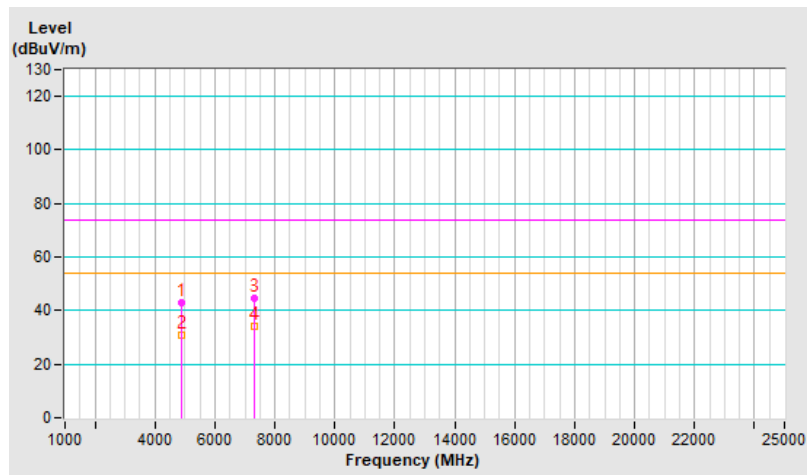




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	40.5 PK	74.0	-33.5	1.73 H	247	36.0	4.5
2	4904.00	30.8 AV	54.0	-23.2	1.73 H	247	26.3	4.5
3	7356.00	46.7 PK	74.0	-27.3	2.43 H	276	34.8	11.9
4	7356.00	33.9 AV	54.0	-20.1	2.43 H	276	22.0	11.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

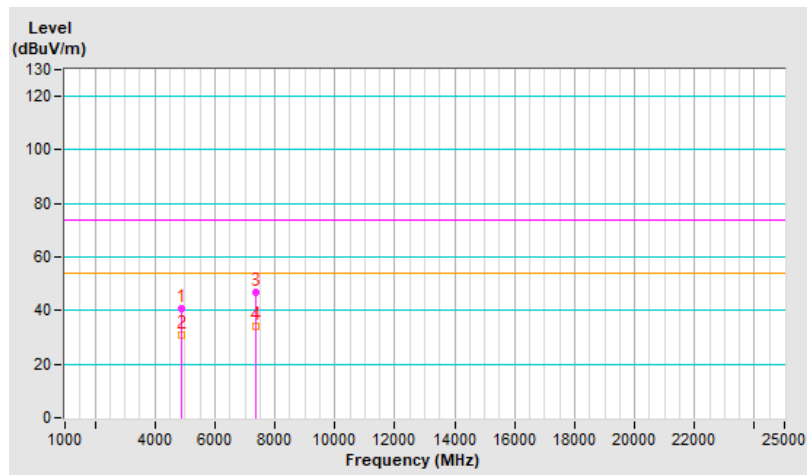


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4904.00	42.5 PK	74.0	-31.5	2.45 V	297	38.0	4.5
2	4904.00	30.7 AV	54.0	-23.3	2.45 V	297	26.2	4.5
3	7356.00	44.1 PK	74.0	-29.9	1.97 V	236	32.2	11.9
4	7356.00	33.3 AV	54.0	-20.7	1.97 V	236	21.4	11.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

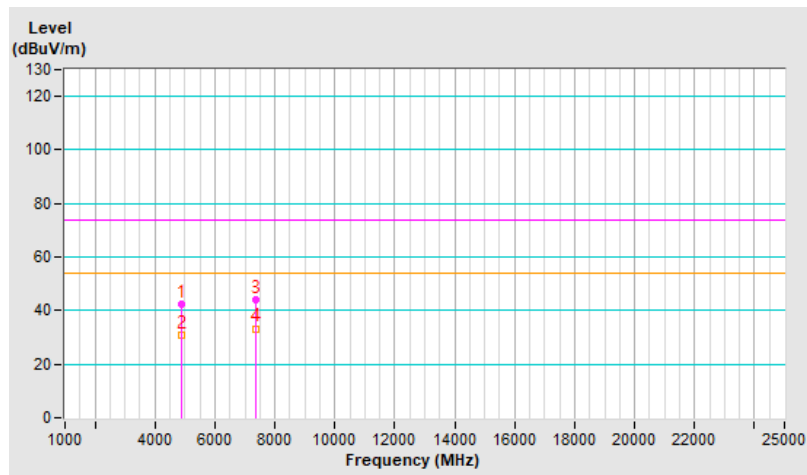


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.4 PK	74.0	-31.6	1.69 H	251	37.8	4.6
2	4914.00	31.4 AV	54.0	-22.6	1.69 H	251	26.8	4.6
3	7371.00	44.6 PK	74.0	-29.4	2.41 H	285	32.6	12.0
4	7371.00	33.3 AV	54.0	-20.7	2.41 H	285	21.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

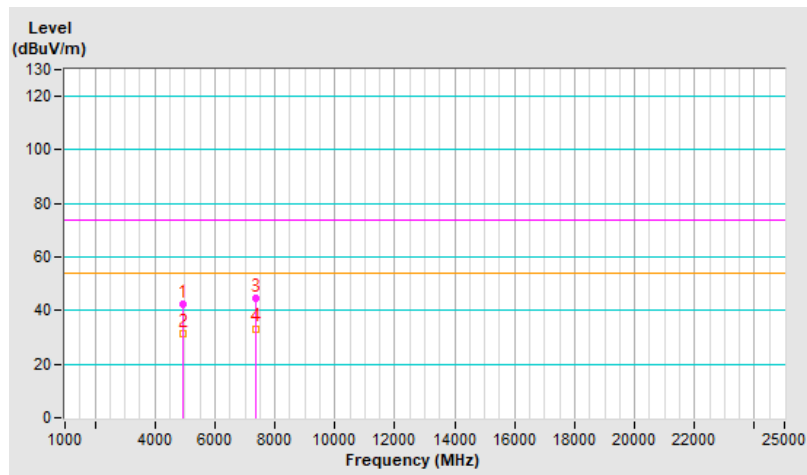


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 10 : 2457 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4914.00	42.3 PK	74.0	-31.7	2.44 V	300	37.7	4.6
2	4914.00	30.9 AV	54.0	-23.1	2.44 V	300	26.3	4.6
3	7371.00	45.6 PK	74.0	-28.4	1.97 V	244	33.6	12.0
4	7371.00	33.8 AV	54.0	-20.2	1.97 V	244	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

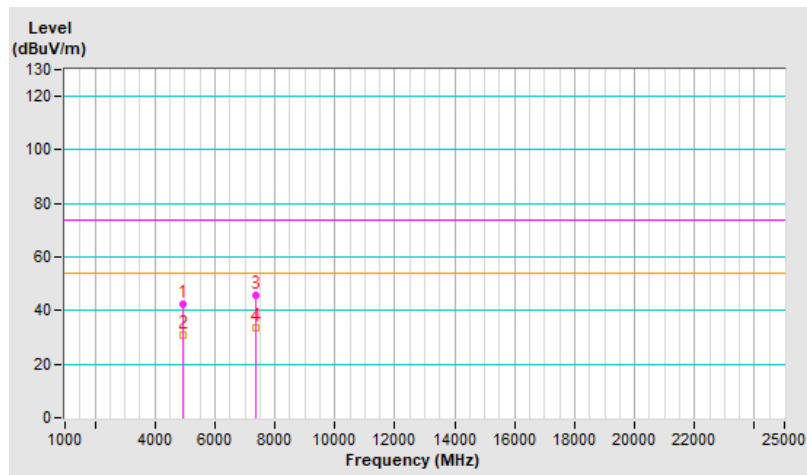




<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.7 PK	74.0	-31.3	1.69 H	254	38.1	4.6
2	4924.00	31.4 AV	54.0	-22.6	1.69 H	254	26.8	4.6
3	7386.00	44.7 PK	74.0	-29.3	2.46 H	295	32.7	12.0
4	7386.00	33.2 AV	54.0	-20.8	2.46 H	295	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

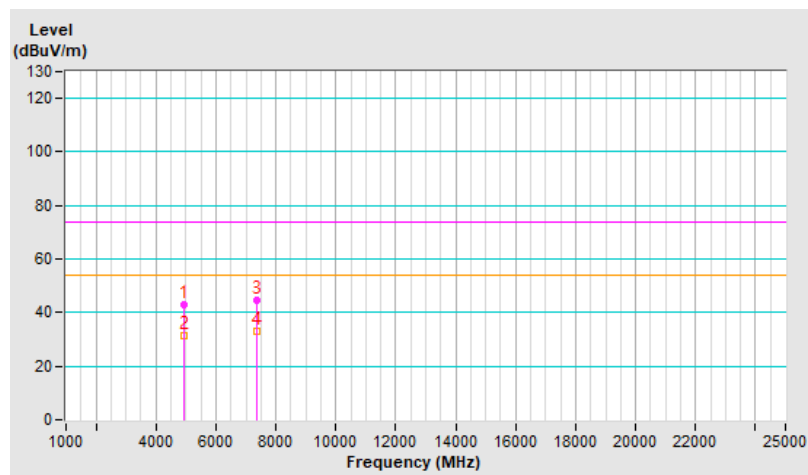


<b>RF Mode</b>	802.11be (EHT40)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.5 PK	74.0	-31.5	2.41 V	298	37.9	4.6
2	4924.00	31.2 AV	54.0	-22.8	2.41 V	298	26.6	4.6
3	7386.00	45.3 PK	74.0	-28.7	1.94 V	213	33.3	12.0
4	7386.00	33.5 AV	54.0	-20.5	1.94 V	213	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

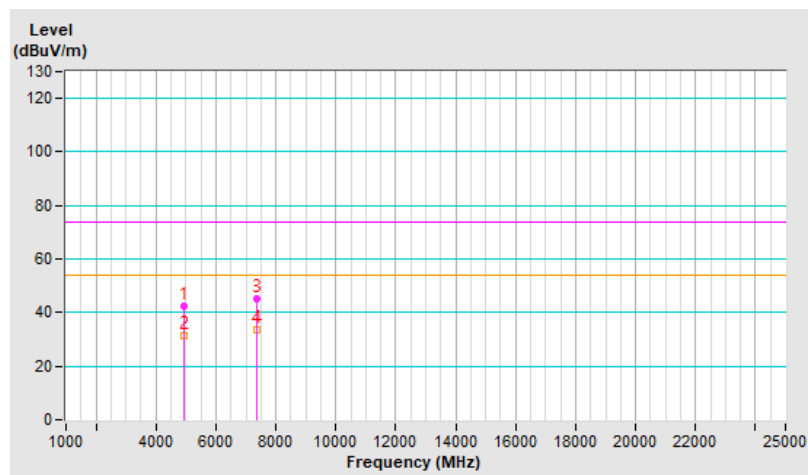


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.8 PK	74.0	-33.2	1.79 H	265	36.3	4.5
2	4824.00	30.8 AV	54.0	-23.2	1.79 H	265	26.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

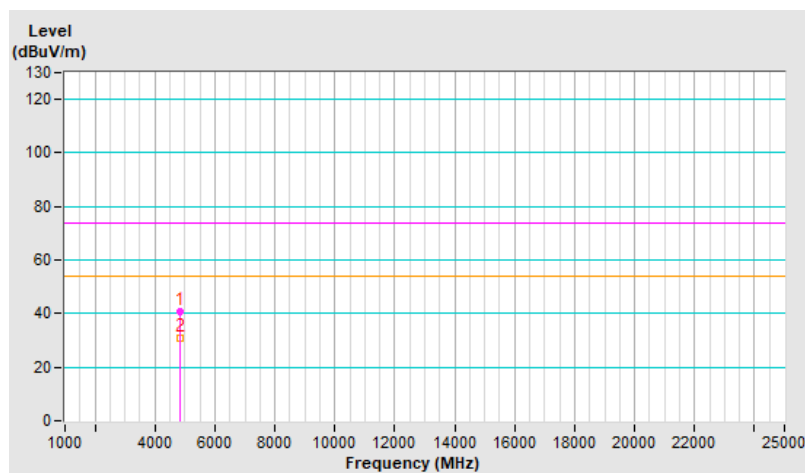


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.8 PK	74.0	-32.2	2.44 V	268	37.3	4.5
2	4824.00	30.5 AV	54.0	-23.5	2.44 V	268	26.0	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

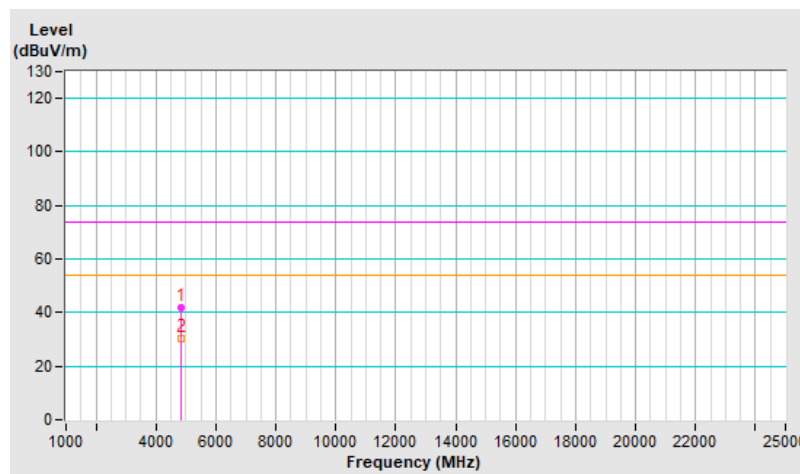


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.0 PK	74.0	-33.0	1.76 H	273	36.5	4.5
2	4874.00	30.9 AV	54.0	-23.1	1.76 H	273	26.4	4.5
3	7311.00	46.1 PK	74.0	-27.9	2.49 H	299	34.6	11.5
4	7311.00	35.0 AV	54.0	-19.0	2.49 H	299	23.5	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

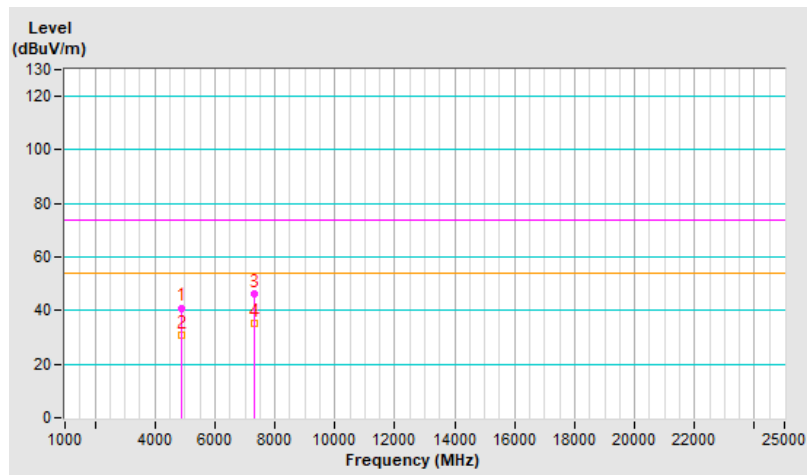




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.1 PK	74.0	-31.9	2.45 V	257	37.6	4.5
2	4874.00	30.6 AV	54.0	-23.4	2.45 V	257	26.1	4.5
3	7311.00	44.6 PK	74.0	-29.4	1.98 V	221	33.1	11.5
4	7311.00	33.1 AV	54.0	-20.9	1.98 V	221	21.6	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

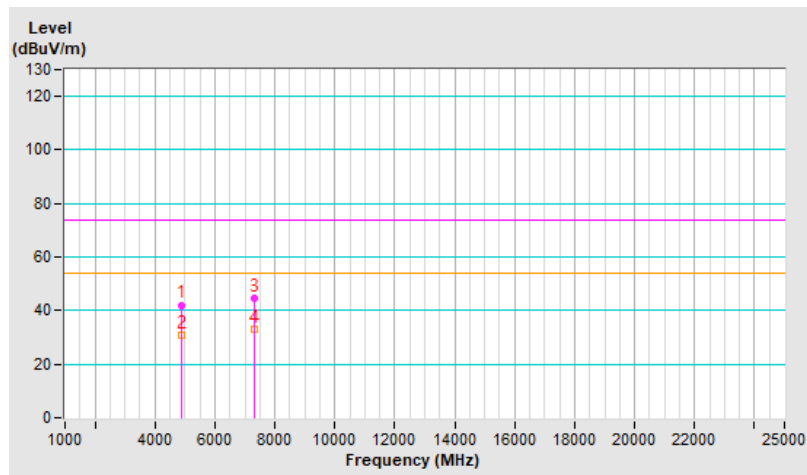




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.0 PK	74.0	-33.0	1.77 H	246	36.4	4.6
2	4924.00	31.1 AV	54.0	-22.9	1.77 H	246	26.5	4.6
3	7386.00	46.4 PK	74.0	-27.6	2.41 H	291	34.4	12.0
4	7386.00	35.3 AV	54.0	-18.7	2.41 H	291	23.3	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

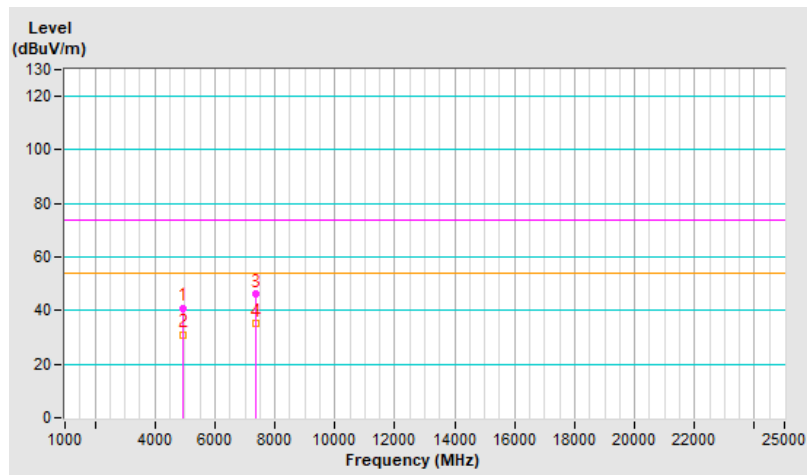


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	43.0 PK	74.0	-31.0	2.52 V	257	38.4	4.6
2	4924.00	31.2 AV	54.0	-22.8	2.52 V	257	26.6	4.6
3	7386.00	44.6 PK	74.0	-29.4	1.99 V	233	32.6	12.0
4	7386.00	33.1 AV	54.0	-20.9	1.99 V	233	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

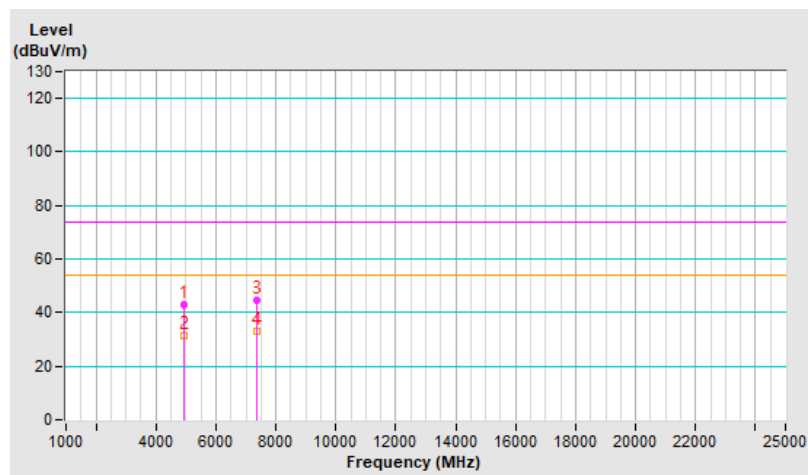




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.9 PK	74.0	-33.1	1.80 H	257	36.3	4.6
2	4934.00	31.0 AV	54.0	-23.0	1.80 H	257	26.4	4.6
3	7401.00	46.2 PK	74.0	-27.8	2.38 H	298	34.2	12.0
4	7401.00	35.0 AV	54.0	-19.0	2.38 H	298	23.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

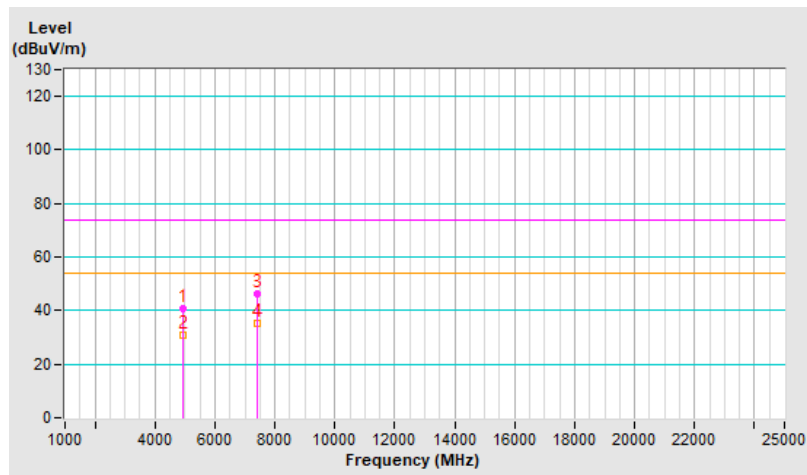




<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.7 PK	74.0	-32.3	2.51 V	276	37.1	4.6
2	4934.00	30.3 AV	54.0	-23.7	2.51 V	276	25.7	4.6
3	7401.00	44.1 PK	74.0	-29.9	2.04 V	246	32.1	12.0
4	7401.00	32.6 AV	54.0	-21.4	2.04 V	246	20.6	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

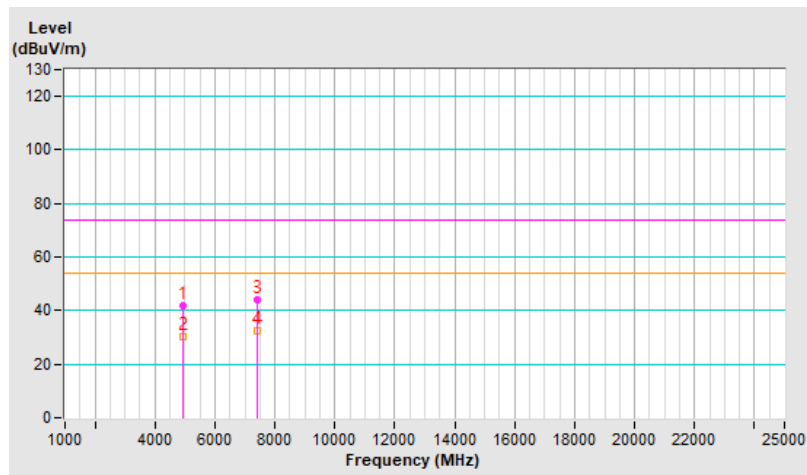


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.9 PK	74.0	-33.1	1.72 H	268	36.2	4.7
2	4944.00	30.7 AV	54.0	-23.3	1.72 H	268	26.0	4.7
3	7416.00	47.4 PK	74.0	-26.6	2.49 H	291	35.4	12.0
4	7416.00	35.7 AV	54.0	-18.3	2.49 H	291	23.7	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

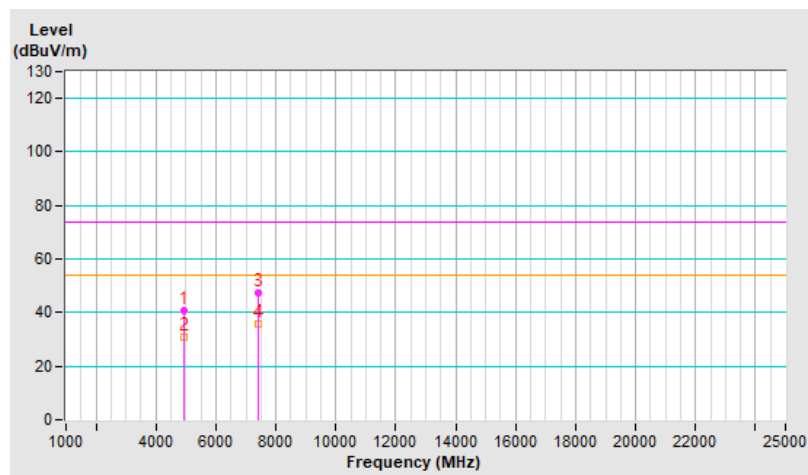


<b>RF Mode</b>	802.11be (EHT20) 26-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.0 PK	74.0	-32.0	2.52 V	283	37.3	4.7
2	4944.00	30.5 AV	54.0	-23.5	2.52 V	283	25.8	4.7
3	7416.00	44.8 PK	74.0	-29.2	2.01 V	243	32.8	12.0
4	7416.00	33.4 AV	54.0	-20.6	2.01 V	243	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

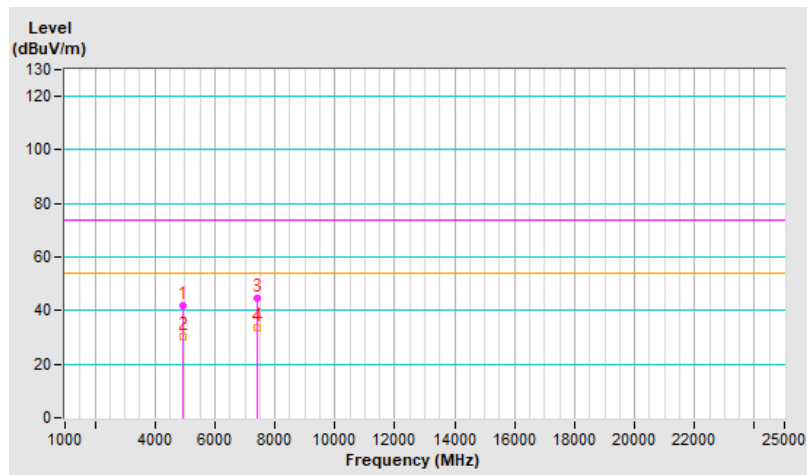


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.9 PK	74.0	-33.1	1.73 H	266	36.4	4.5
2	4824.00	30.9 AV	54.0	-23.1	1.73 H	266	26.4	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

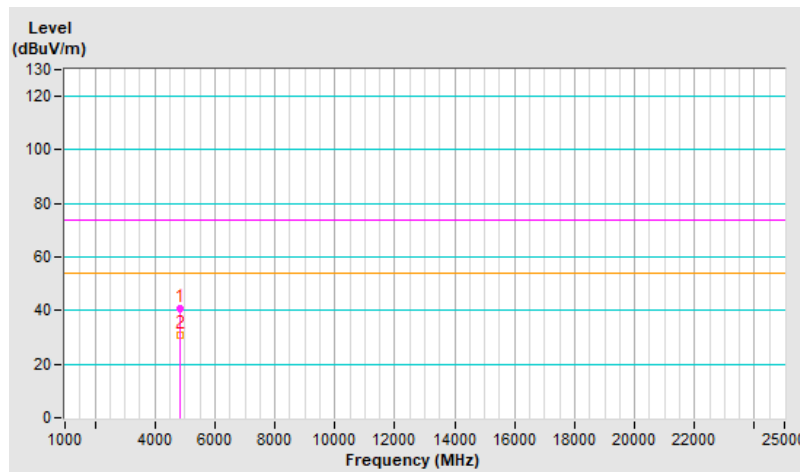




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.7 PK	74.0	-31.3	2.54 V	296	38.2	4.5
2	4824.00	30.5 AV	54.0	-23.5	2.54 V	296	26.0	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

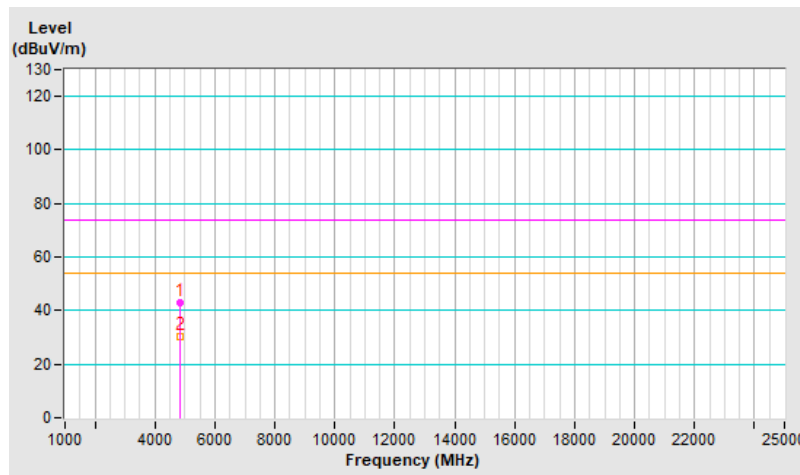




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.4 PK	74.0	-32.6	1.70 H	287	36.9	4.5
2	4874.00	31.1 AV	54.0	-22.9	1.70 H	287	26.6	4.5
3	7311.00	46.3 PK	74.0	-27.7	2.50 H	282	34.8	11.5
4	7311.00	33.6 AV	54.0	-20.4	2.50 H	282	22.1	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

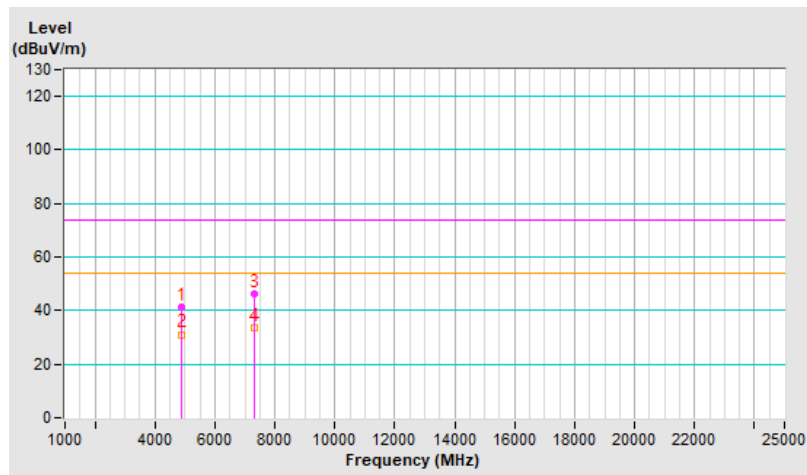


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.3 PK	74.0	-31.7	2.50 V	295	37.8	4.5
2	4874.00	30.4 AV	54.0	-23.6	2.50 V	295	25.9	4.5
3	7311.00	44.2 PK	74.0	-29.8	1.95 V	253	32.7	11.5
4	7311.00	33.0 AV	54.0	-21.0	1.95 V	253	21.5	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

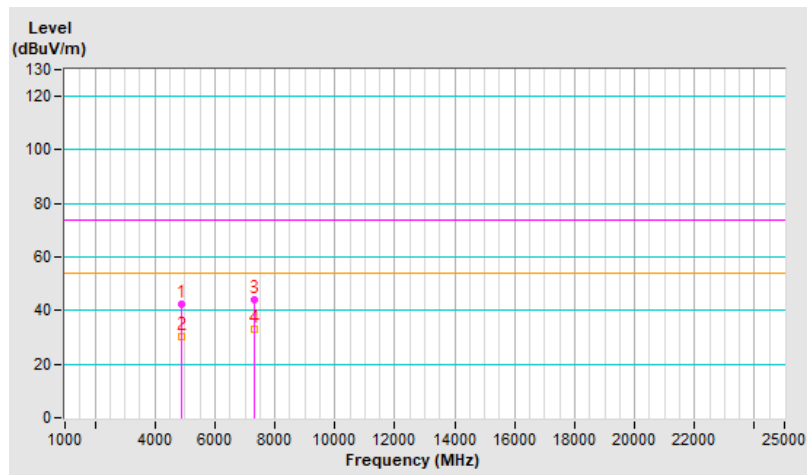




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	41.3 PK	74.0	-32.7	1.79 H	294	36.7	4.6
2	4924.00	31.0 AV	54.0	-23.0	1.79 H	294	26.4	4.6
3	7386.00	47.0 PK	74.0	-27.0	2.48 H	300	35.0	12.0
4	7386.00	33.9 AV	54.0	-20.1	2.48 H	300	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

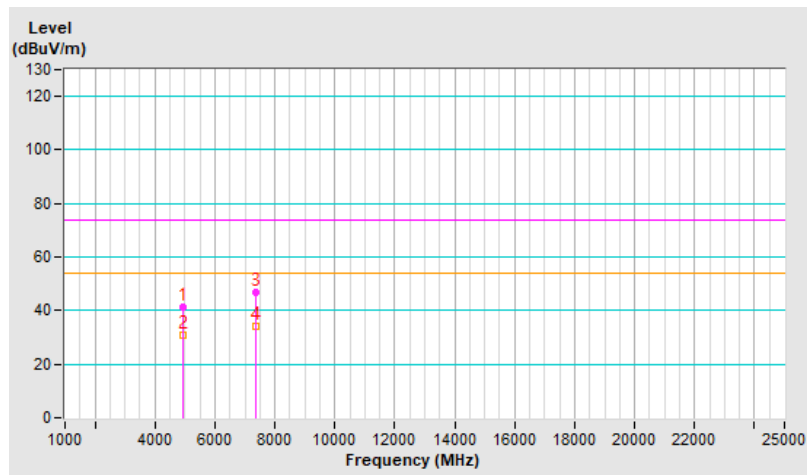




<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.8 PK	74.0	-31.2	2.46 V	274	38.2	4.6
2	4924.00	30.8 AV	54.0	-23.2	2.46 V	274	26.2	4.6
3	7386.00	44.3 PK	74.0	-29.7	1.92 V	235	32.3	12.0
4	7386.00	33.1 AV	54.0	-20.9	1.92 V	235	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

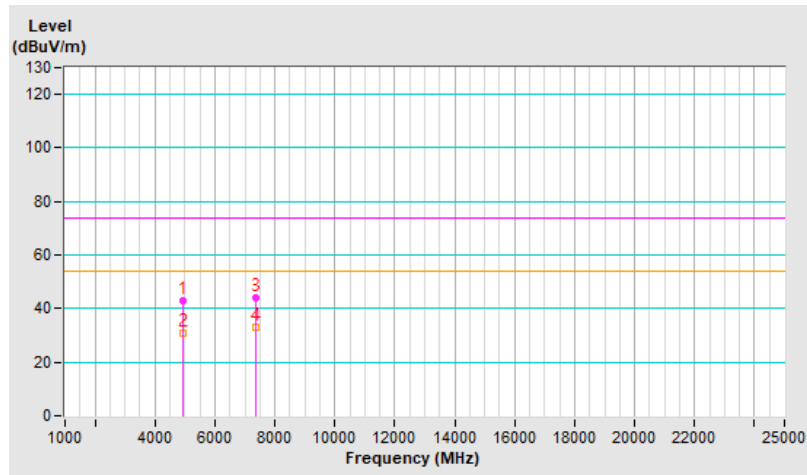


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	40.9 PK	74.0	-33.1	1.75 H	295	36.3	4.6
2	4934.00	30.7 AV	54.0	-23.3	1.75 H	295	26.1	4.6
3	7401.00	46.1 PK	74.0	-27.9	2.51 H	282	34.1	12.0
4	7401.00	33.4 AV	54.0	-20.6	2.51 H	282	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

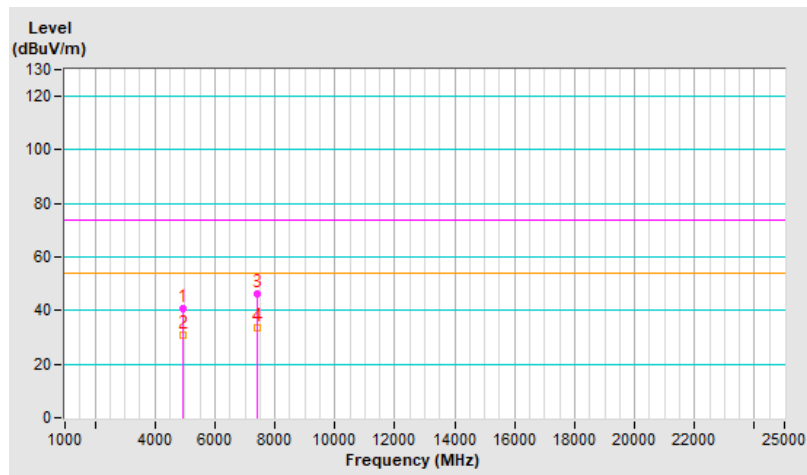


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.8 PK	74.0	-31.2	2.45 V	285	38.2	4.6
2	4934.00	30.6 AV	54.0	-23.4	2.45 V	285	26.0	4.6
3	7401.00	44.5 PK	74.0	-29.5	2.04 V	241	32.5	12.0
4	7401.00	33.1 AV	54.0	-20.9	2.04 V	241	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

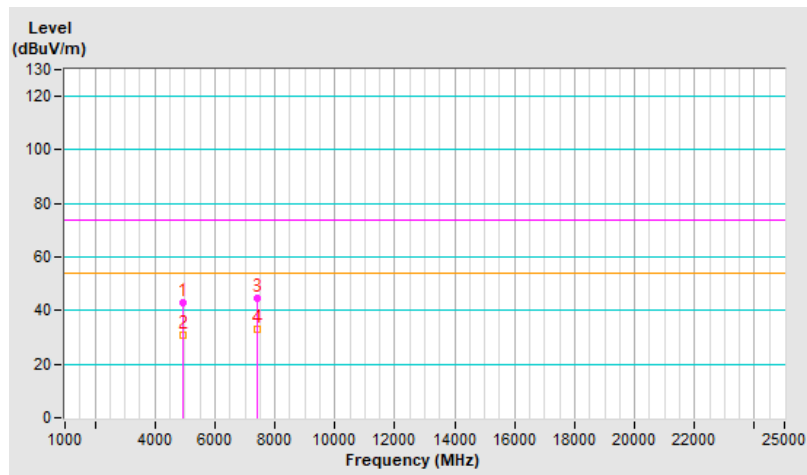


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.2 PK	74.0	-32.8	1.70 H	269	36.5	4.7
2	4944.00	30.8 AV	54.0	-23.2	1.70 H	269	26.1	4.7
3	7416.00	46.9 PK	74.0	-27.1	2.46 H	283	34.9	12.0
4	7416.00	34.0 AV	54.0	-20.0	2.46 H	283	22.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

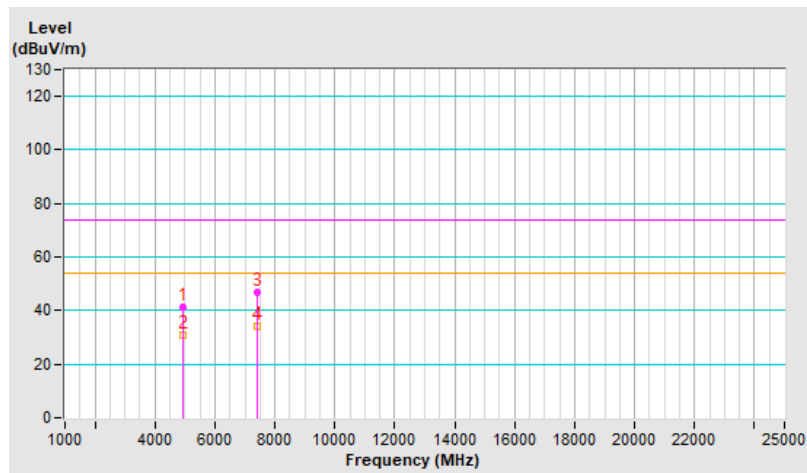


<b>RF Mode</b>	802.11be (EHT20) 52-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	43.5 PK	74.0	-30.5	2.50 V	277	38.8	4.7
2	4944.00	31.1 AV	54.0	-22.9	2.50 V	277	26.4	4.7
3	7416.00	44.4 PK	74.0	-29.6	1.96 V	244	32.4	12.0
4	7416.00	33.1 AV	54.0	-20.9	1.96 V	244	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

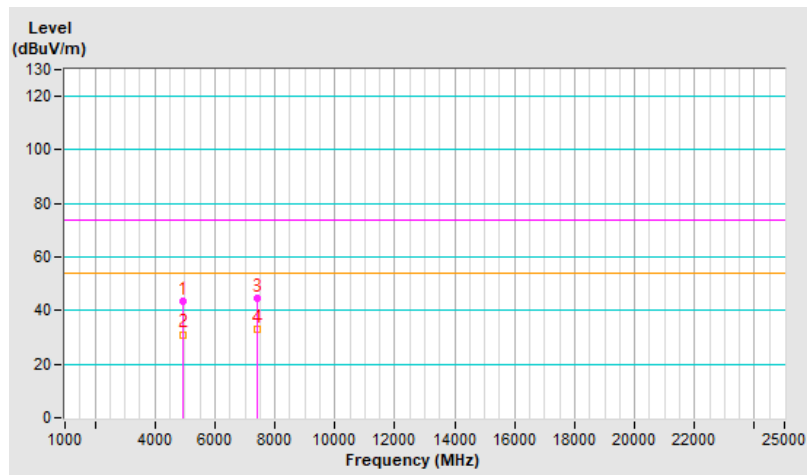


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.5 PK	74.0	-33.5	1.75 H	270	36.0	4.5
2	4824.00	30.5 AV	54.0	-23.5	1.75 H	270	26.0	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

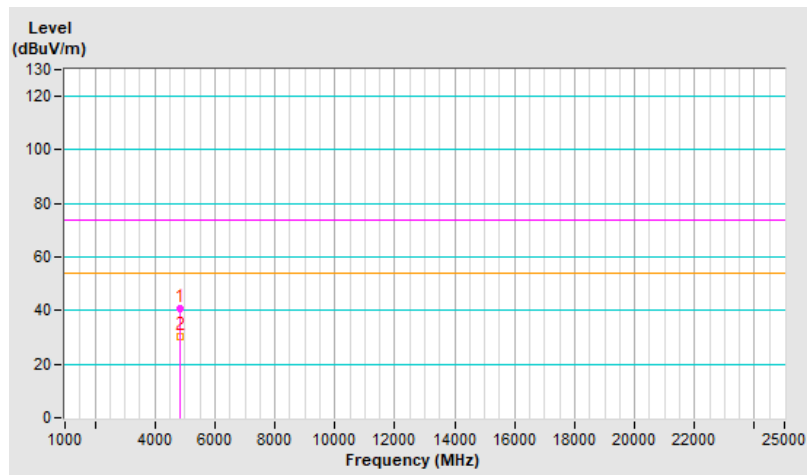




<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	42.9 PK	74.0	-31.1	2.51 V	278	38.4	4.5
2	4824.00	30.8 AV	54.0	-23.2	2.51 V	278	26.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

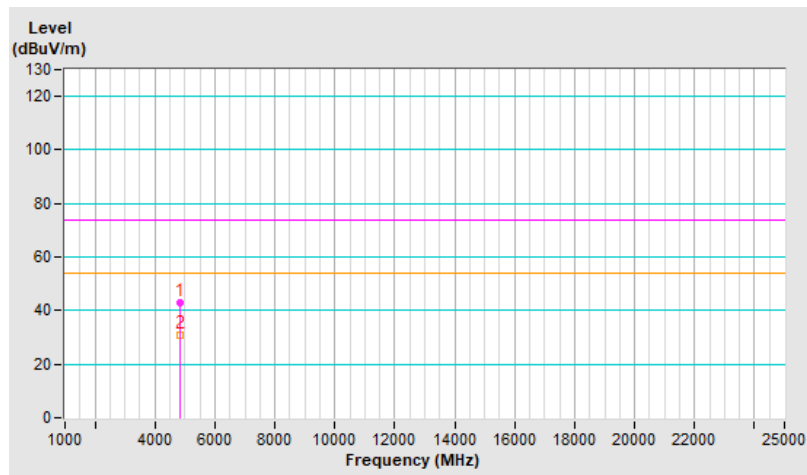






<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	1.75 H	285	36.4	4.5
2	4874.00	30.6 AV	54.0	-23.4	1.75 H	285	26.1	4.5
3	7311.00	47.0 PK	74.0	-27.0	2.49 H	288	35.5	11.5
4	7311.00	34.3 AV	54.0	-19.7	2.49 H	288	22.8	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

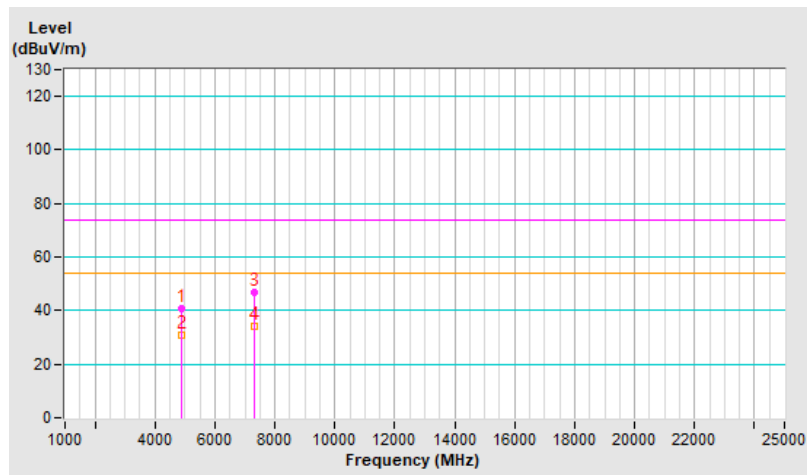




<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.3 PK	74.0	-32.7	2.43 V	268	36.8	4.5
2	4874.00	29.8 AV	54.0	-24.2	2.43 V	268	25.3	4.5
3	7311.00	44.1 PK	74.0	-29.9	1.96 V	248	32.6	11.5
4	7311.00	33.3 AV	54.0	-20.7	1.96 V	248	21.8	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

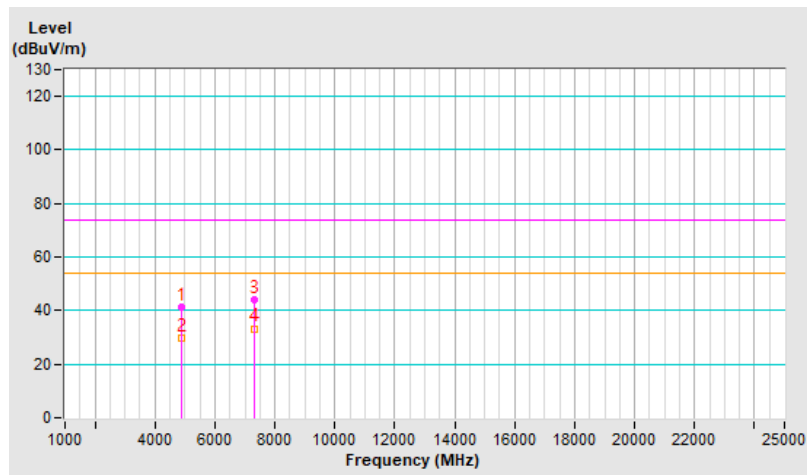


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.7 PK	74.0	-33.3	1.67 H	278	36.1	4.6
2	4924.00	30.6 AV	54.0	-23.4	1.67 H	278	26.0	4.6
3	7386.00	46.9 PK	74.0	-27.1	2.41 H	305	34.9	12.0
4	7386.00	33.9 AV	54.0	-20.1	2.41 H	305	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

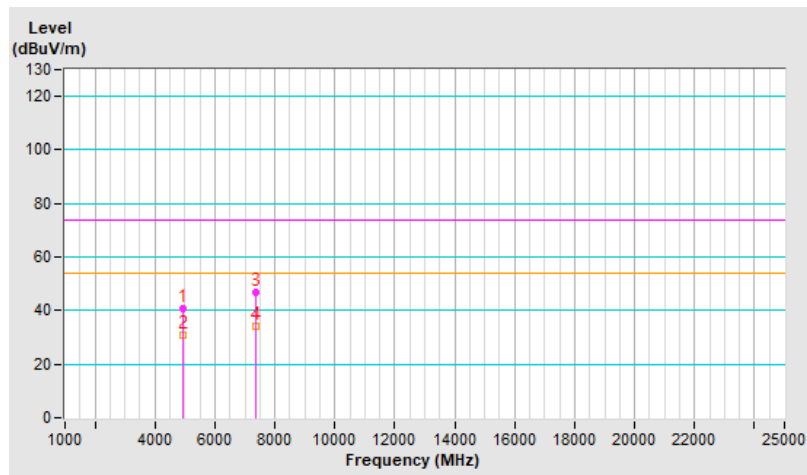


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.6 PK	74.0	-31.4	2.50 V	277	38.0	4.6
2	4924.00	30.8 AV	54.0	-23.2	2.50 V	277	26.2	4.6
3	7386.00	43.7 PK	74.0	-30.3	1.90 V	240	31.7	12.0
4	7386.00	33.0 AV	54.0	-21.0	1.90 V	240	21.0	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

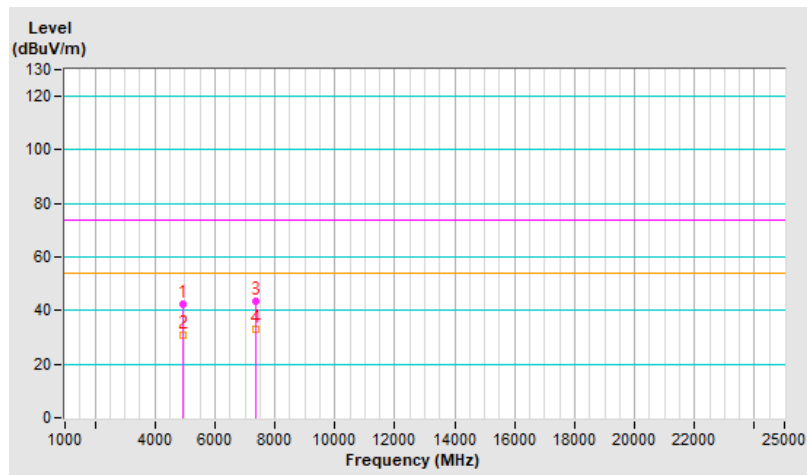




<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.1 PK	74.0	-32.9	1.71 H	283	36.5	4.6
2	4934.00	31.1 AV	54.0	-22.9	1.71 H	283	26.5	4.6
3	7401.00	46.3 PK	74.0	-27.7	2.48 H	307	34.3	12.0
4	7401.00	33.9 AV	54.0	-20.1	2.48 H	307	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

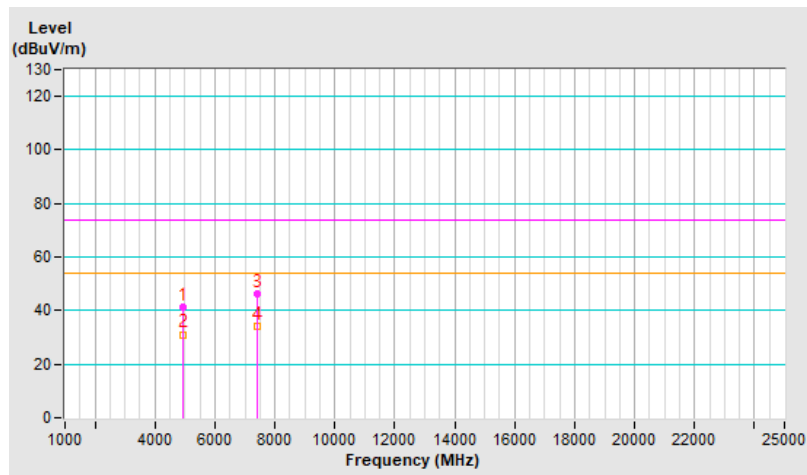


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.1 PK	74.0	-31.9	2.44 V	253	37.5	4.6
2	4934.00	30.1 AV	54.0	-23.9	2.44 V	253	25.5	4.6
3	7401.00	44.2 PK	74.0	-29.8	1.90 V	232	32.2	12.0
4	7401.00	33.1 AV	54.0	-20.9	1.90 V	232	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

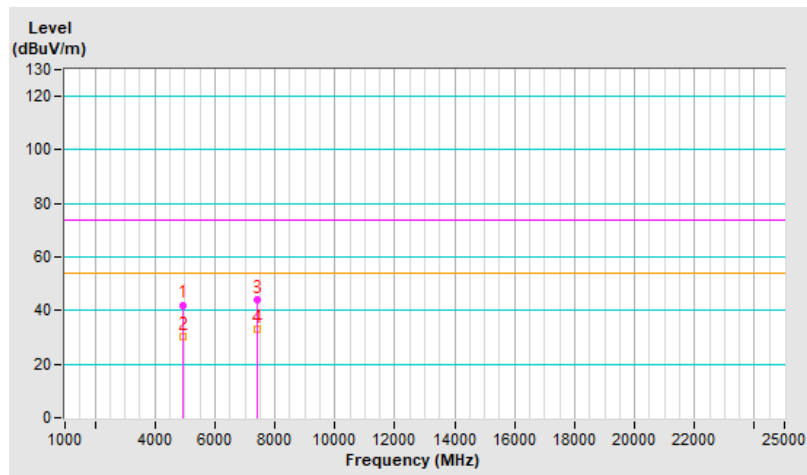


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.1 PK	74.0	-32.9	1.73 H	269	36.4	4.7
2	4944.00	30.8 AV	54.0	-23.2	1.73 H	269	26.1	4.7
3	7416.00	46.6 PK	74.0	-27.4	2.45 H	289	34.6	12.0
4	7416.00	33.9 AV	54.0	-20.1	2.45 H	289	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

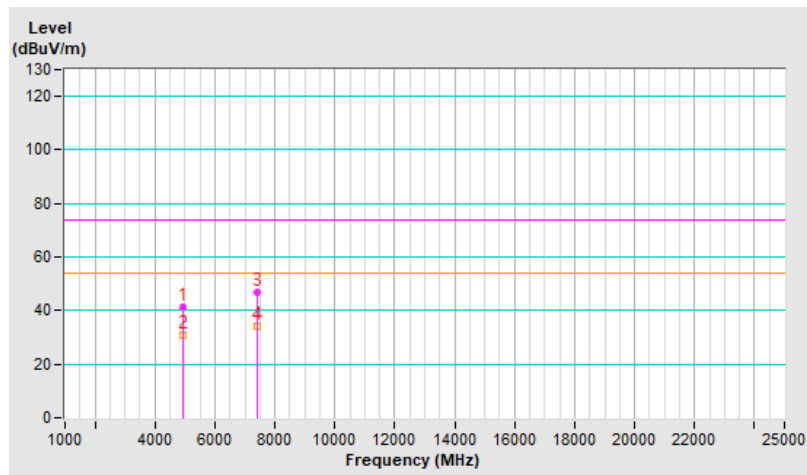


<b>RF Mode</b>	802.11be (EHT20) 106-tone RU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	41.9 PK	74.0	-32.1	2.44 V	268	37.2	4.7
2	4944.00	30.0 AV	54.0	-24.0	2.44 V	268	25.3	4.7
3	7416.00	45.0 PK	74.0	-29.0	1.94 V	236	33.0	12.0
4	7416.00	33.9 AV	54.0	-20.1	1.94 V	236	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

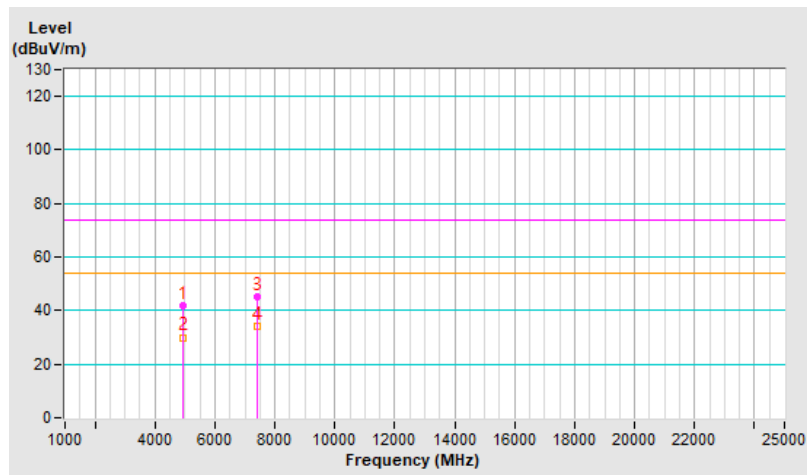




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.1 PK	74.0	-32.9	1.82 H	265	36.6	4.5
2	4824.00	30.9 AV	54.0	-23.1	1.82 H	265	26.4	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

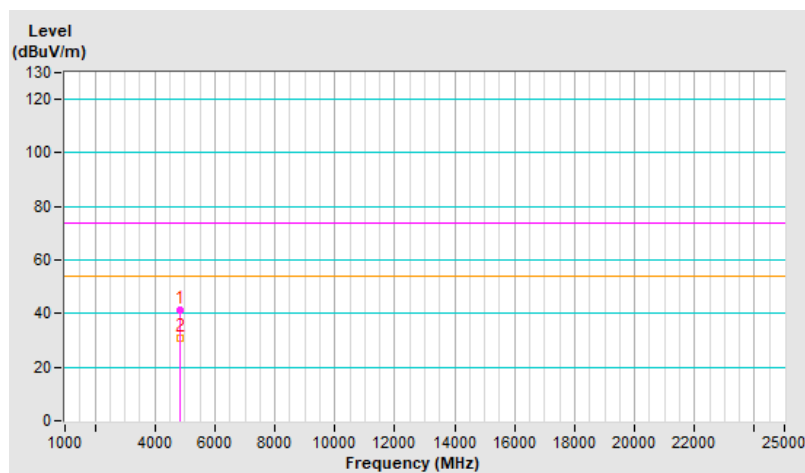


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.4 PK	74.0	-32.6	2.50 V	279	36.9	4.5
2	4824.00	30.3 AV	54.0	-23.7	2.50 V	279	25.8	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

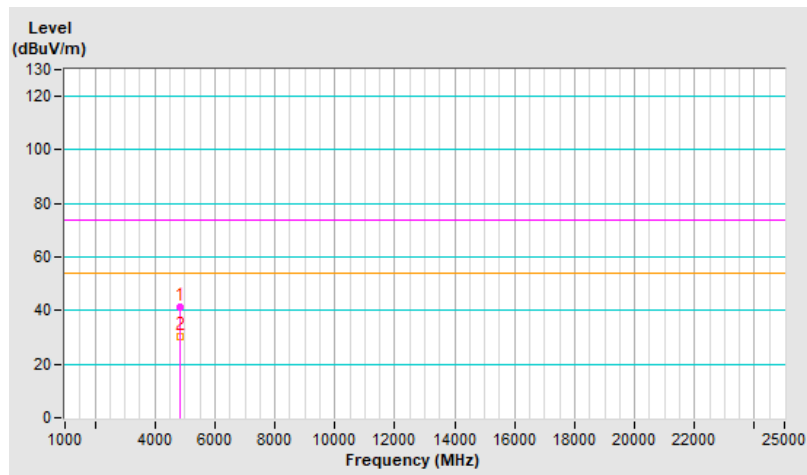




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.5 PK	74.0	-33.5	1.64 H	261	36.0	4.5
2	4874.00	30.6 AV	54.0	-23.4	1.64 H	261	26.1	4.5
3	7311.00	46.8 PK	74.0	-27.2	2.41 H	286	35.3	11.5
4	7311.00	34.2 AV	54.0	-19.8	2.41 H	286	22.7	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

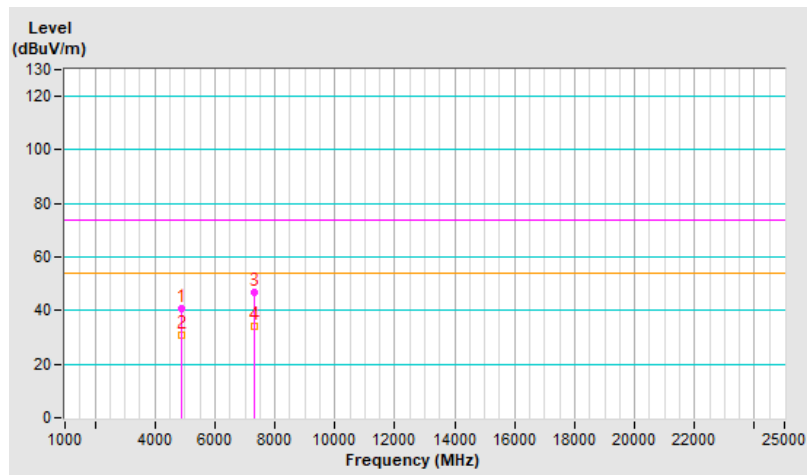


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	41.7 PK	74.0	-32.3	2.51 V	254	37.2	4.5
2	4874.00	30.0 AV	54.0	-24.0	2.51 V	254	25.5	4.5
3	7311.00	44.7 PK	74.0	-29.3	2.00 V	254	33.2	11.5
4	7311.00	33.8 AV	54.0	-20.2	2.00 V	254	22.3	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

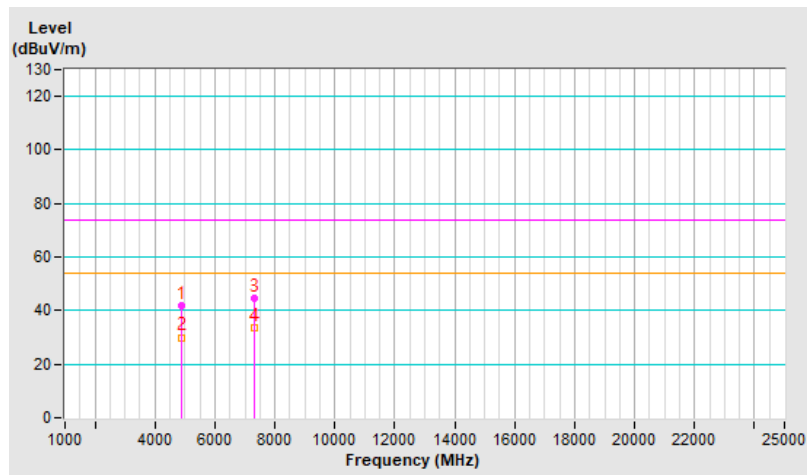




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	40.9 PK	74.0	-33.1	1.75 H	271	36.3	4.6
2	4924.00	30.5 AV	54.0	-23.5	1.75 H	271	25.9	4.6
3	7386.00	46.8 PK	74.0	-27.2	2.52 H	292	34.8	12.0
4	7386.00	33.9 AV	54.0	-20.1	2.52 H	292	21.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

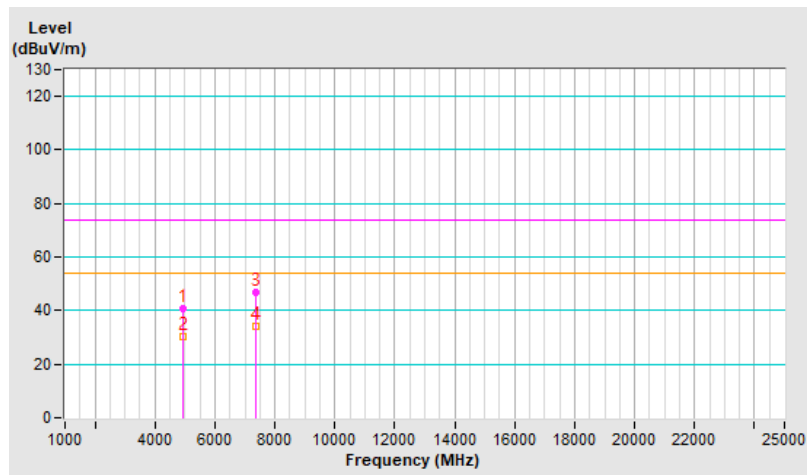


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.2 PK	74.0	-31.8	2.54 V	255	37.6	4.6
2	4924.00	30.7 AV	54.0	-23.3	2.54 V	255	26.1	4.6
3	7386.00	44.2 PK	74.0	-29.8	1.91 V	249	32.2	12.0
4	7386.00	33.1 AV	54.0	-20.9	1.91 V	249	21.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

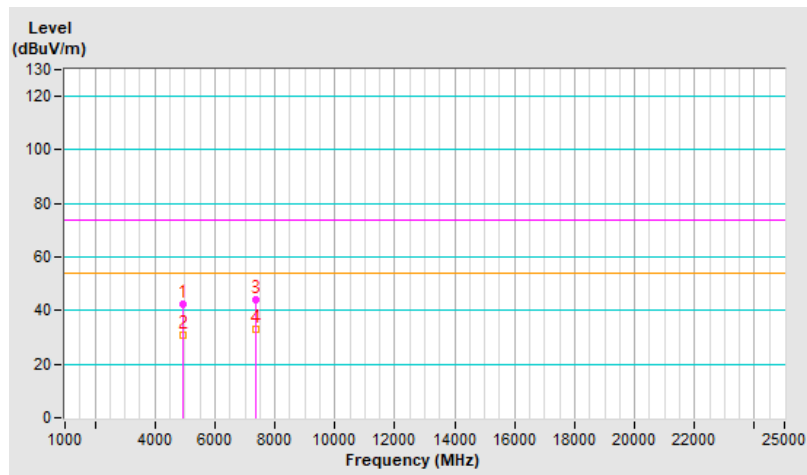


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	41.4 PK	74.0	-32.6	1.68 H	271	36.8	4.6
2	4934.00	30.9 AV	54.0	-23.1	1.68 H	271	26.3	4.6
3	7401.00	46.6 PK	74.0	-27.4	2.42 H	297	34.6	12.0
4	7401.00	34.1 AV	54.0	-19.9	2.42 H	297	22.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

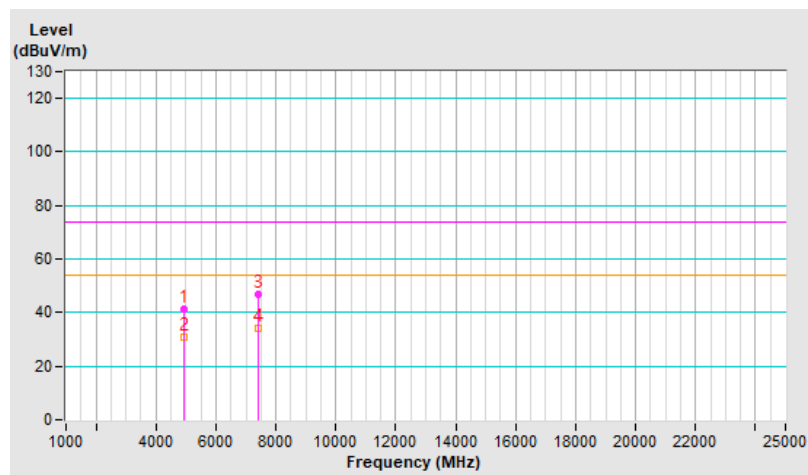




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.2 PK	74.0	-31.8	2.45 V	271	37.6	4.6
2	4934.00	30.3 AV	54.0	-23.7	2.45 V	271	25.7	4.6
3	7401.00	43.6 PK	74.0	-30.4	1.90 V	233	31.6	12.0
4	7401.00	32.9 AV	54.0	-21.1	1.90 V	233	20.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

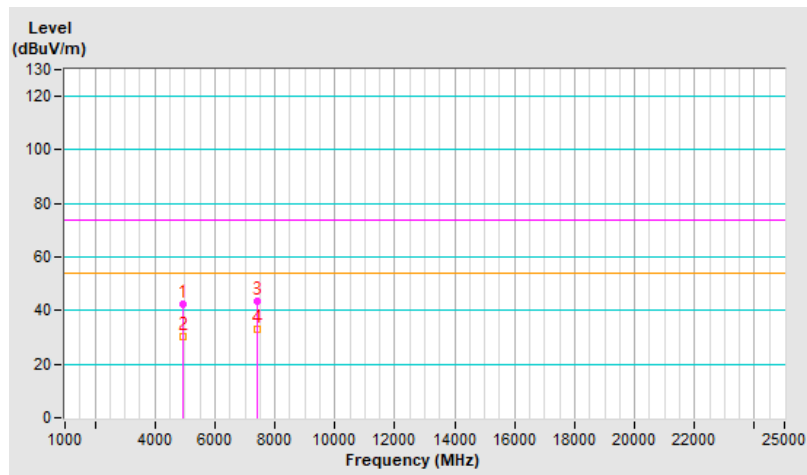




<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	40.7 PK	74.0	-33.3	1.67 H	264	36.0	4.7
2	4944.00	30.4 AV	54.0	-23.6	1.67 H	264	25.7	4.7
3	7416.00	46.9 PK	74.0	-27.1	2.43 H	306	34.9	12.0
4	7416.00	34.4 AV	54.0	-19.6	2.43 H	306	22.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

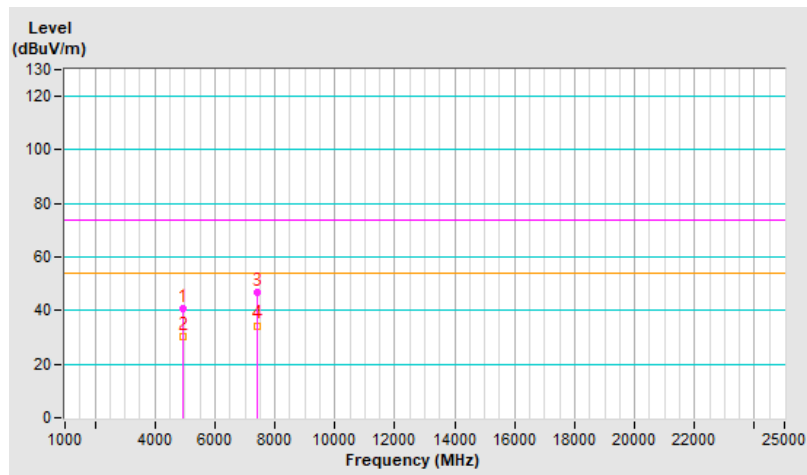


<b>RF Mode</b>	802.11be (EHT20) 52+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.1 PK	74.0	-31.9	2.51 V	266	37.4	4.7
2	4944.00	30.2 AV	54.0	-23.8	2.51 V	266	25.5	4.7
3	7416.00	44.6 PK	74.0	-29.4	1.92 V	242	32.6	12.0
4	7416.00	33.5 AV	54.0	-20.5	1.92 V	242	21.5	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

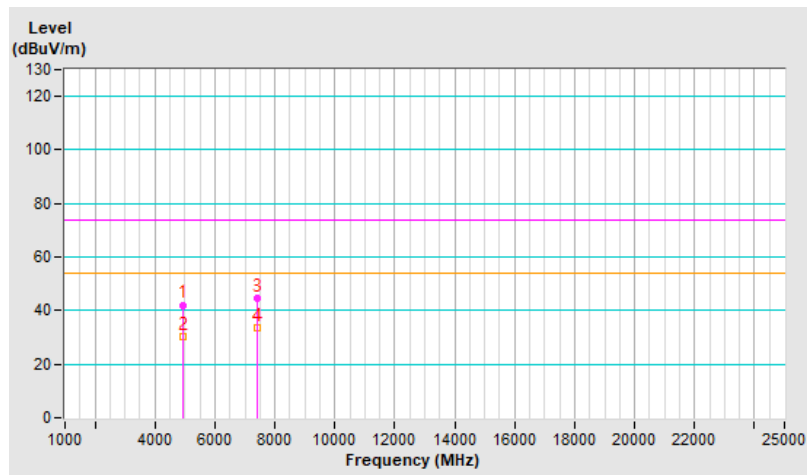




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	40.9 PK	74.0	-33.1	1.74 H	282	36.4	4.5
2	4824.00	31.1 AV	54.0	-22.9	1.74 H	282	26.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

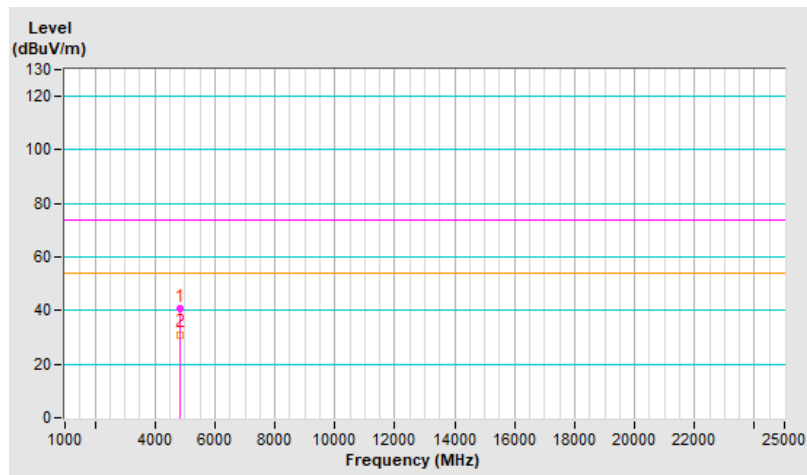


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	41.7 PK	74.0	-32.3	2.45 V	279	37.2	4.5
2	4824.00	30.1 AV	54.0	-23.9	2.45 V	279	25.6	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

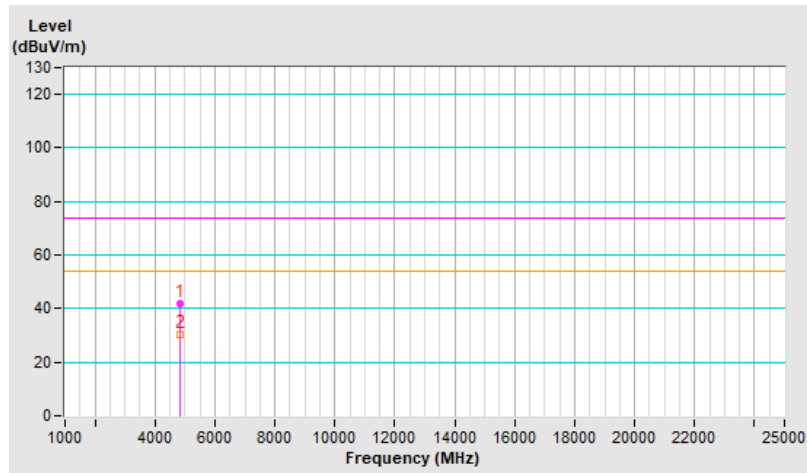


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	42.1 PK	74.0	-31.9	1.68 H	282	37.6	4.5
2	4874.00	30.2 AV	54.0	-23.8	1.68 H	282	25.7	4.5
3	7311.00	45.3 PK	74.0	-28.7	2.54 H	276	33.8	11.5
4	7311.00	33.9 AV	54.0	-20.1	2.54 H	276	22.4	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

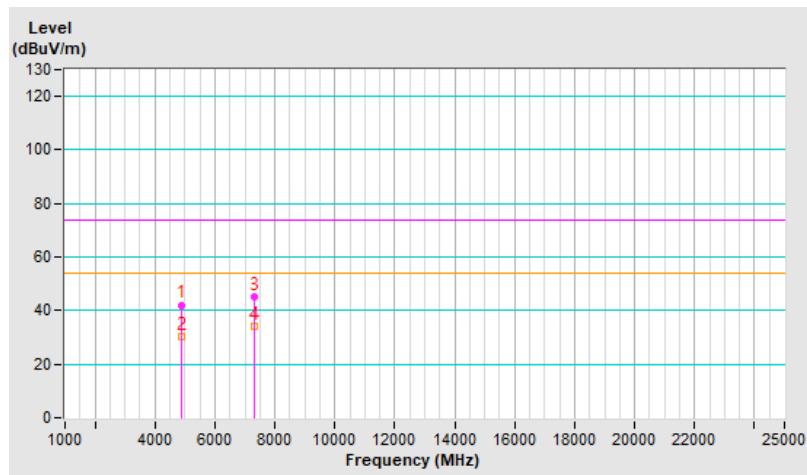


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	43.0 PK	74.0	-31.0	2.51 V	262	38.5	4.5
2	4874.00	30.9 AV	54.0	-23.1	2.51 V	262	26.4	4.5
3	7311.00	43.6 PK	74.0	-30.4	1.89 V	217	32.1	11.5
4	7311.00	32.9 AV	54.0	-21.1	1.89 V	217	21.4	11.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

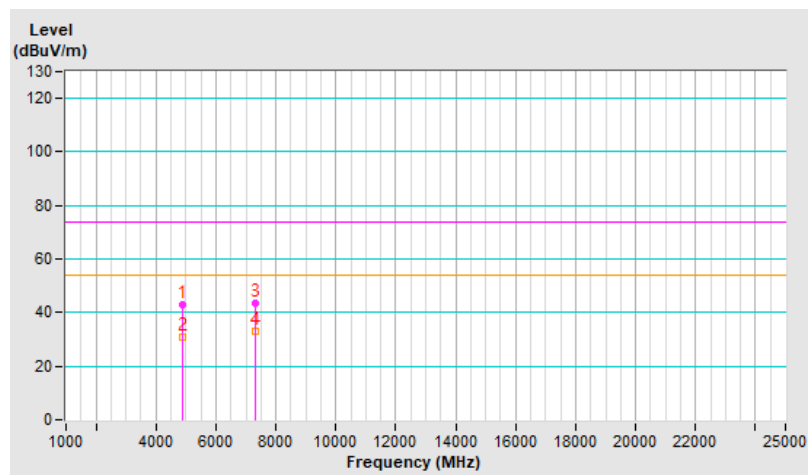




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.7 PK	74.0	-31.3	1.68 H	280	38.1	4.6
2	4924.00	30.7 AV	54.0	-23.3	1.68 H	280	26.1	4.6
3	7386.00	45.2 PK	74.0	-28.8	2.53 H	280	33.2	12.0
4	7386.00	34.1 AV	54.0	-19.9	2.53 H	280	22.1	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

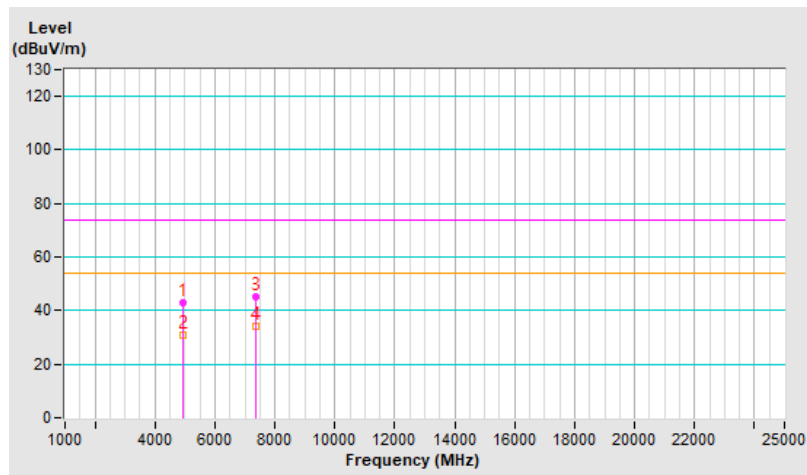


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	42.2 PK	74.0	-31.8	2.49 V	281	37.6	4.6
2	4924.00	30.0 AV	54.0	-24.0	2.49 V	281	25.4	4.6
3	7386.00	44.1 PK	74.0	-29.9	1.90 V	238	32.1	12.0
4	7386.00	33.4 AV	54.0	-20.6	1.90 V	238	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

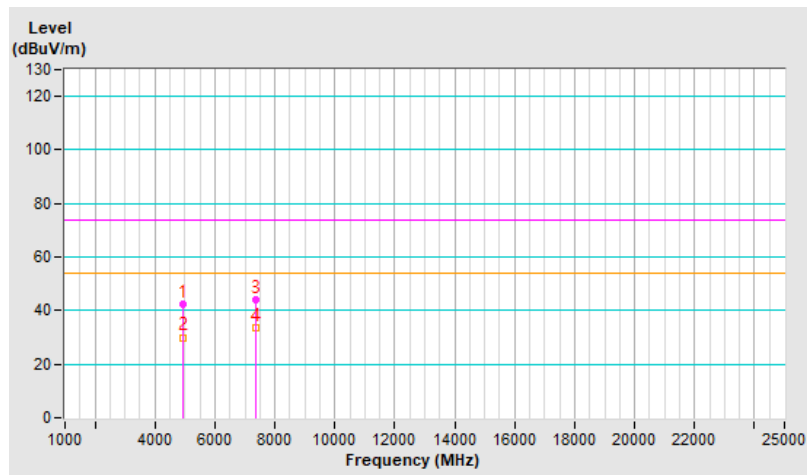






<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.8 PK	74.0	-31.2	1.64 H	287	38.2	4.6
2	4934.00	30.9 AV	54.0	-23.1	1.64 H	287	26.3	4.6
3	7401.00	44.5 PK	74.0	-29.5	2.47 H	275	32.5	12.0
4	7401.00	33.4 AV	54.0	-20.6	2.47 H	275	21.4	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

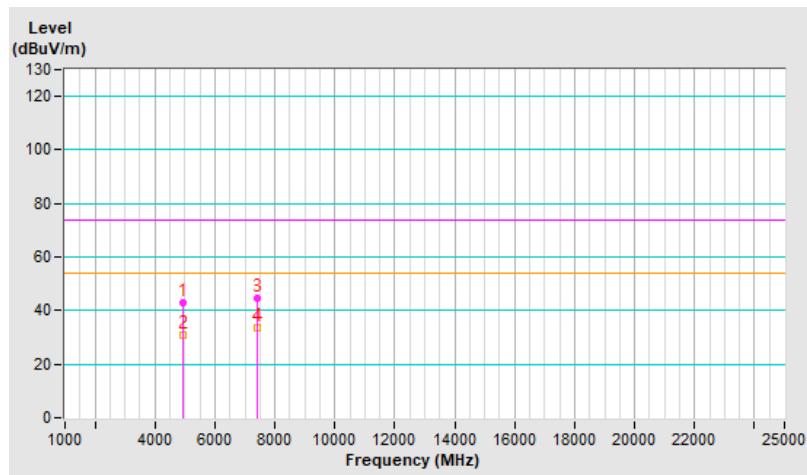




<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 12 : 2467 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4934.00	42.4 PK	74.0	-31.6	2.54 V	272	37.8	4.6
2	4934.00	30.7 AV	54.0	-23.3	2.54 V	272	26.1	4.6
3	7401.00	43.9 PK	74.0	-30.1	1.90 V	215	31.9	12.0
4	7401.00	32.9 AV	54.0	-21.1	1.90 V	215	20.9	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

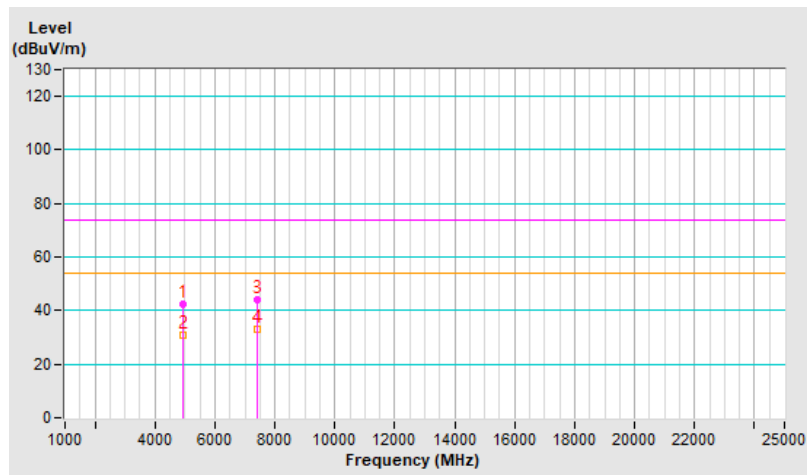


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.2 PK	74.0	-31.8	1.70 H	269	37.5	4.7
2	4944.00	30.7 AV	54.0	-23.3	1.70 H	269	26.0	4.7
3	7416.00	45.3 PK	74.0	-28.7	2.50 H	280	33.3	12.0
4	7416.00	33.8 AV	54.0	-20.2	2.50 H	280	21.8	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

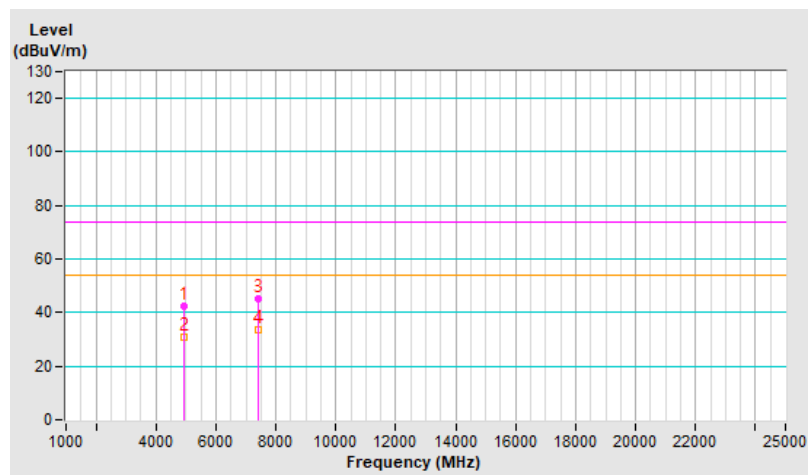


<b>RF Mode</b>	802.11be (EHT20) 106+26-tone MRU	<b>Channel</b>	CH 13 : 2472 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=300 Hz, DET=Peak
<b>Input Power (System)</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4944.00	42.3 PK	74.0	-31.7	2.49 V	281	37.6	4.7
2	4944.00	30.1 AV	54.0	-23.9	2.49 V	281	25.4	4.7
3	7416.00	44.4 PK	74.0	-29.6	1.96 V	231	32.4	12.0
4	7416.00	33.2 AV	54.0	-20.8	1.96 V	231	21.2	12.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

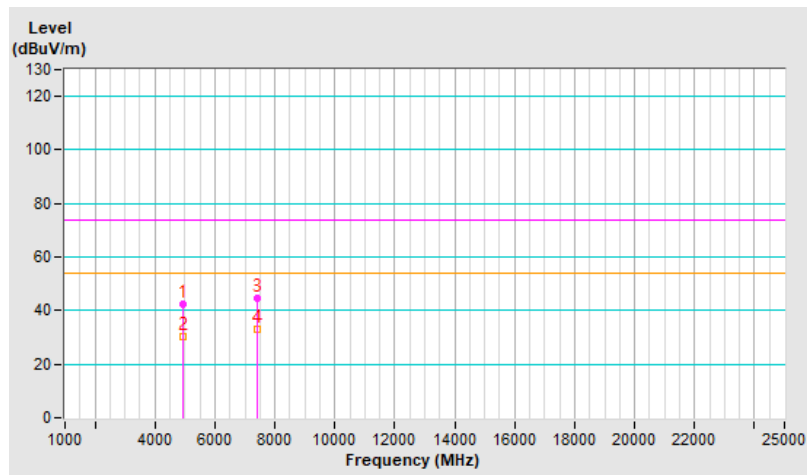

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---