


FCC SAR TEST REPORT

FCC ID : RAS-MT7925B14L
Equipment : 2TX 11be (WiFi7) BW160+ BT/BLE Combo Card
Brand Name : MediaTek
Model Name : MT7925B14L
Applicant : MediaTek Inc.
No. 1, Dusing 1st Rd. Hsinchu Science Park,
Hsinchu City 30078, Taiwan
Manufacturer : MediaTek Inc.
No. 1, Dusing 1st Rd. Hsinchu Science Park,
Hsinchu City 30078, Taiwan
Standard : FCC 47 CFR Part 2 (2.1093)

Equipment: MediaTek MT7925B14L tested inside of Lenovo Notebook Computer.

The product was received on Jan. 17, 2025 and testing was started from Jan. 30, 2025 and completed on Feb. 09, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
4. RF Exposure Limits.....	7
4.1 Uncontrolled Environment.....	7
4.2 Controlled Environment.....	7
4.3 RF Exposure limit for above 6GHz.....	8
5. Specific Absorption Rate (SAR).....	9
5.1 Introduction	9
5.2 SAR Definition.....	9
6. System Description and Setup	10
6.1 Test Site Location.....	10
6.2 E-Field Probe	11
6.3 Data Acquisition Electronics (DAE)	11
6.4 Phantom.....	12
6.5 Device Holder.....	13
7. Measurement Procedures	14
7.1 Spatial Peak SAR Evaluation.....	14
7.2 Power Reference Measurement.....	15
7.3 Area Scan	15
7.4 Zoom Scan.....	16
7.5 Volume Scan Procedures.....	16
7.6 Power Drift Monitoring.....	16
8. Test Equipment List.....	17
9. System Verification	18
9.1 Tissue Verification	18
9.2 System Performance Check Results.....	19
9.3 PD System Performance Check Results.....	20
10. WiFi/Bluetooth Output Power (Unit: dBm)	21
11. SAR Test Results	32
11.1 Body SAR.....	33
11.2 6GHz PD Test Result.....	35
11.3 Repeated SAR Measurement.....	36
12. Simultaneous Transmission Analysis	37
12.1 Body Exposure Conditions.....	37
13. Uncertainty Assessment	38
14. References.....	41
Appendix A. Plots of SAR System Performance Check	
Appendix B. Plots of PD System Performance Check	
Appendix C. Plots of High SAR Measurement	
Appendix D. Plots of High PD Measurement	
Appendix E. DASY Calibration Certificate	
Appendix F. Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA492709-03	01	Initial issue of report	Feb. 17, 2025
FA492709-03	02	Update section 3	Feb. 19, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for MediaTek Inc., 2TX 11be (WiFi7) BW160+ BT/BLE Combo Card, MT7925B14L, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
		Body (Separation 0mm)		
		1g SAR (W/kg)		
DTS	2.4GHz WLAN	0.39		1.52
NII	5GHz WLAN	1.20		1.52
6CD	6GHz WLAN	0.62		1.52
DSS	Bluetooth	0.01		1.21
Equipment Class	Frequency Band	Reported APD (mW/cm^2)		Reported PD (mW/cm^2)
6CD	6GHz WLAN	0.48		0.75
Date of Testing:		2025/01/30 ~ 2025/02/09		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	2TX 11be (WiFi7) BW160+ BT/BLE Combo Card
Brand Name	MediaTek
Model Name	MT7925B14L
FCC ID	RAS-MT7925B14L
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE
Remark: 1. There are three kinds of antenna vendor, RF exposure evaluation is selected SPEED as the main test, ATC and ICT will spot check worst case found in SPEED.	

Host Information	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00152E
EUT Stage	Production Unit

Antenna Information					
Antenna 1	Manufacturer	SPEEDWIRE			
	Antenna Type	PIFA Antenna		PIFA Antenna	
	Part number	DC330022600		DC330022600	
	Peak gain (dbi)	Main Antenna :		Aux Antenna :	
		WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi
		WLAN(5G B4):	1.85 dBi	WLAN(5G B4):	2.28 dBi
		UNII4:	-0.86 dBi	UNII4:	2.06 dBi
		UNII5:	2.31 dBi	UNII5:	2.64 dBi
		UNII6:	2.33 dBi	UNII6:	2.64 dBi
		UNII7:	2.80 dBi	UNII7:	2.55 dBi
		UNII8:	2.81 dBi	UNII8:	2.46 dBi
Antenna 2	Manufacturer	Amphenol Taiwan Corporation			
	Antenna Type	PIFA Antenna		PIFA Antenna	
	Part number	DC330022400		DC330022400	
	Peak gain (dbi)	Main Antenna :		Aux Antenna :	
		WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi
		WLAN(5G B4):	1.85 dBi	WLAN(5G B4):	2.28 dBi
		UNII4:	-0.86 dBi	UNII4:	2.06 dBi
		UNII5:	2.31 dBi	UNII5:	2.64 dBi
		UNII6:	2.33 dBi	UNII6:	2.64 dBi
		UNII7:	2.80 dBi	UNII7:	2.55 dBi
		UNII8:	2.81 dBi	UNII8:	2.46 dBi
Antenna 3	Manufacturer	Luxshare-ICT			
	Antenna Type	PIFA Antenna		PIFA Antenna	
	Part number	DC330022500		DC330022500	
	Peak gain (dbi)	Main Antenna :		Aux Antenna :	
		WLAN(2.4G):	1.41 dBi	BT/WLAN(2.4G):	1.33 dBi
		WLAN(5G B1):	2.21 dBi	WLAN(5G B1):	-0.11 dBi
		WLAN(5G B2):	2.21 dBi	WLAN(5G B2):	1.29 dBi
		WLAN(5G B3):	2.45 dBi	WLAN(5G B3):	1.92 dBi
		WLAN(5G B4):	1.85 dBi	WLAN(5G B4):	2.28 dBi
		UNII4:	-0.86 dBi	UNII4:	2.06 dBi
		UNII5:	2.31 dBi	UNII5:	2.64 dBi
		UNII6:	2.33 dBi	UNII6:	2.64 dBi
		UNII7:	2.80 dBi	UNII7:	2.55 dBi
		UNII8:	2.81 dBi	UNII8:	2.46 dBi

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

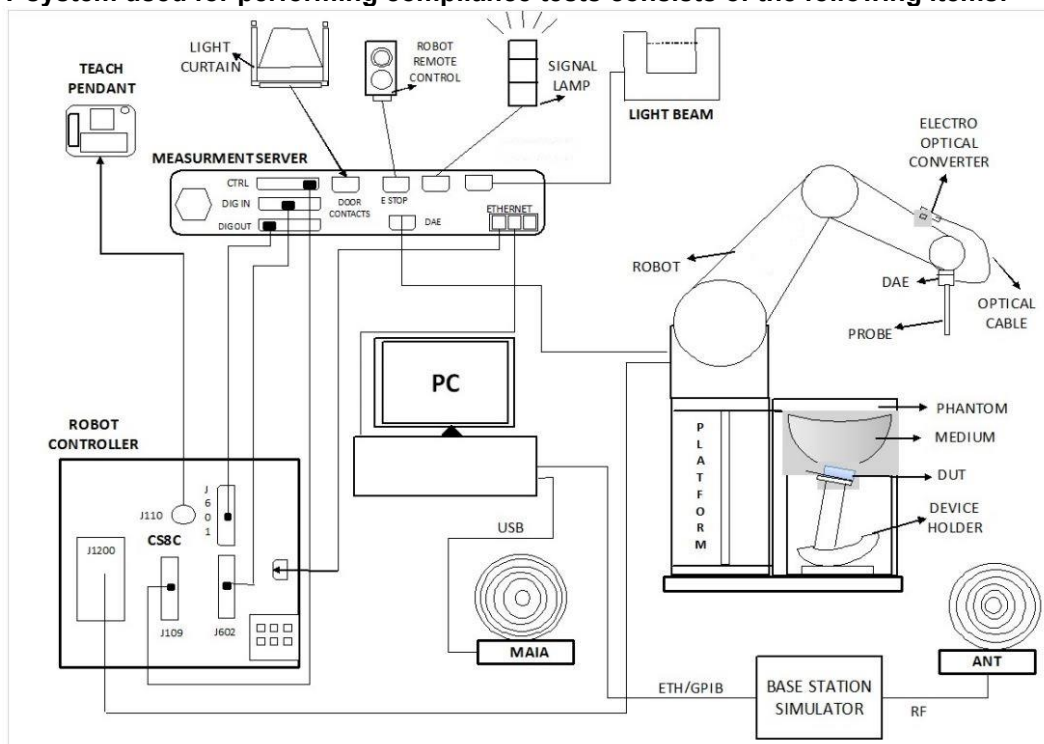

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 15, 2024	Aug. 14, 2025
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2022	Nov. 18, 2025
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Oct. 15, 2024	Oct. 14, 2025
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1003	Mar. 15, 2024	Mar. 14, 2025
SPEAG	5G Verification Source	10GHz	1052	Oct. 16, 2024	Oct. 15, 2025
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9461	Oct. 16, 2024	Oct. 15, 2025
SPEAG	Data Acquisition Electronics	DAE4	703	Apr. 22, 2024	Apr. 21, 2025
SPEAG	Data Acquisition Electronics	DAE4	1424	Dec. 19, 2024	Dec. 18, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Nov. 19, 2024	Nov. 18, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
R&S	BT Base Station	CBT	101136	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2024	Sep. 23, 2025
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 17, 2024	Sep. 16, 2025
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 07, 2024	Aug. 06, 2025
Anritsu	Power Meter	ML2495A	1419002	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Power Sensor	MA2411B	1911176	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2024	Jul. 08, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 23, 2024	Oct. 22, 2025
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	22.2	1.810	39.900	1.80	39.20	0.56	1.79	± 5	2025/1/30
2450	22.3	1.830	38.800	1.80	39.20	1.67	-1.02	± 5	2025/2/8
5250	22.4	4.810	36.100	4.71	35.95	2.12	0.42	± 5	2025/2/4
5250	22.6	4.770	36.000	4.71	35.95	1.27	0.14	± 5	2025/2/6
5250	22.3	4.760	36.800	4.71	35.95	1.06	2.36	± 5	2025/2/9
5600	22.4	5.220	35.500	5.07	35.50	2.96	0.00	± 5	2025/2/4
5600	22.6	5.140	35.300	5.07	35.50	1.38	-0.56	± 5	2025/2/7
5600	22.8	5.100	35.100	5.07	35.50	0.59	-1.13	± 5	2025/2/8
5600	22.3	5.100	36.300	5.07	35.50	0.59	2.25	± 5	2025/2/9
5800	22.4	5.470	35.100	5.27	35.30	3.80	-0.57	± 5	2025/2/4
5800	22.8	5.350	34.800	5.27	35.30	1.52	-1.42	± 5	2025/2/8
5800	22.3	5.330	36.100	5.27	35.30	1.14	2.27	± 5	2025/2/9
6500	22.5	6.010	35.000	6.07	34.50	-0.99	1.45	± 5	2025/2/5

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR-13	2025/1/30	2450	250	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn703	13.400	52.400	53.6	2.29
SAR-13	2025/2/8	2450	50	D2450V2-736	EX3DV4 - SN3931	DAE4 Sn703	2.660	51.400	53.2	3.50
SAR-13	2025/2/4	5250	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.880	80.600	77.6	-3.72
SAR-13	2025/2/6	5250	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	4.180	80.600	83.6	3.72
SAR-13	2025/2/9	5250	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.910	80.600	78.2	-2.98
SAR-13	2025/2/4	5600	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	4.080	83.400	81.6	-2.16
SAR-13	2025/2/7	5600	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.990	83.400	79.8	-4.32
SAR-13	2025/2/8	5600	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.950	83.400	79	-5.28
SAR-13	2025/2/9	5600	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	4.010	83.400	80.2	-3.84
SAR-13	2025/2/4	5800	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	4.070	80.600	81.4	0.99
SAR-13	2025/2/8	5800	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.830	80.600	76.6	-4.96
SAR-13	2025/2/9	5800	50	D5GHzV2-1006	EX3DV4 - SN3931	DAE4 Sn703	3.990	80.600	79.8	-0.99
SAR-13	2025/2/5	6500	100	D6.5GHzV2-1003	EX3DV4 - SN3931	DAE4 Sn703	29.900	293.000	299	2.05

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 4cm ² APD (W/m ²)	Targeted 4cm ² APD (W/m ²)	Normalized 4cm ² APD (W/m ²)	Deviation (%)
SAR-13	2025/2/5	6500	100	D6.5GHzV2-1003	EX3DV4 - SN3931	DAE4 Sn703	134.00	1310.00	1340.00	2.29

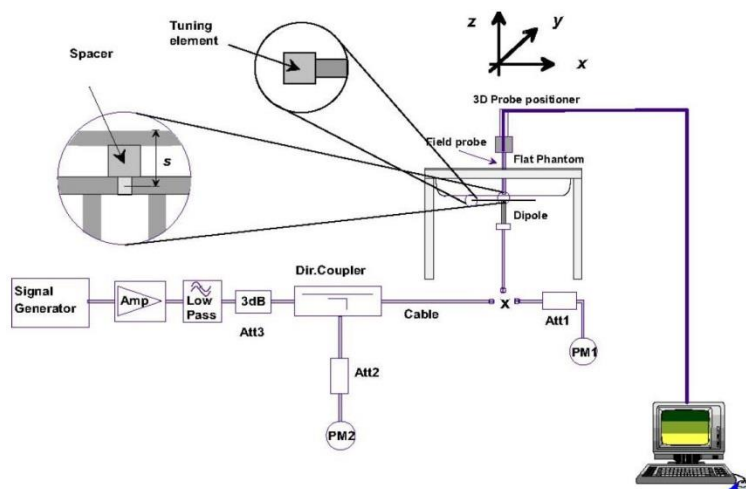


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

9.3 PD System Performance Check Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Location	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR14	10G	10GHz_1052	EUmmWV4 - 9461	1424	10	60.9	57.2	0.27	2025/2/7

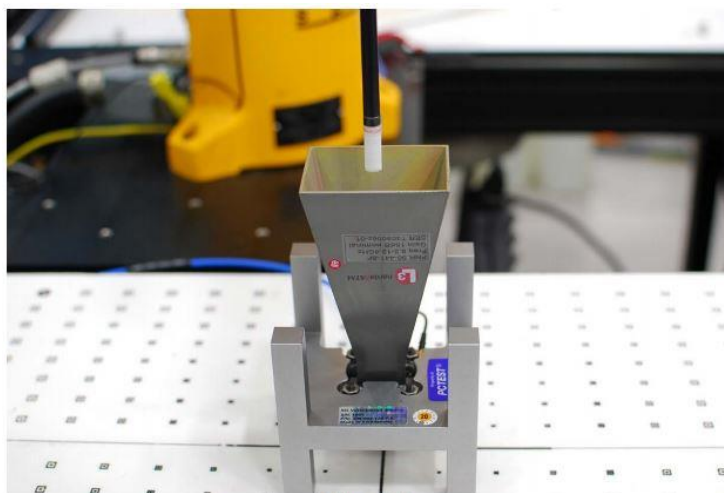


Figure 4-3
System Verification Setup Photo

System Performance Check Setup

10. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
7. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
8. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
9. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	802.11b 1Mbps	1	2412	22.00	22.50	97.40	20.00	20.50	97.40	Not Required	20.50	Not Required	20.50	Not Required	23.50	Not Required	
		6	2437	22.10	22.50		20.00	20.50			20.50		20.50		23.50		
		11	2462	22.10	22.50		20.05	20.50			20.50		20.50		23.50		
		12	2467	19.15	19.50		19.05	19.50			19.50		19.50		22.50		
		13	2472	15.15	15.50		15.05	15.50			15.50		15.50		18.50		
	802.11g 6Mbps	1	2412	Not Required	18.00	Not Required	18.00	Not Required	18.00		18.00		18.00		21.00		
		6	2437		21.50		20.50		20.50		20.50		23.50				
		11	2462		18.50		18.50		18.50		18.50		21.50				
		12	2467		17.50		17.50		17.50		17.50		20.50				
		13	2472		15.50		15.50		15.50		15.50		18.50				
	802.11n-HT20 MCS0	1	2412		17.50		17.50		17.50		17.50		20.50		20.50		23.50
		6	2437		21.50		20.50		20.50		20.50		23.50				
		11	2462		18.50		18.50		18.50		18.50		21.50				
		12	2467		17.50		17.50		17.50		17.50		20.50				
		13	2472		15.50		15.50		15.50		15.50		18.50				
	802.11n-HT40 MCS0	3	2422		16.00		16.00		16.00		16.00		19.00				
		6	2437		19.50		19.50		19.50		19.50		22.50				
		9	2452		17.50		17.50		17.50		17.50		20.50				
		10	2457		16.50		16.50		16.50		16.50		19.50				
		11	2462		16.00		16.00		16.00		16.00		19.00				
	802.11ac-VHT20 MCS0	1	2412		17.50		17.50		17.50		17.50		20.50		20.50		23.50
		6	2437		21.50		20.50		20.50		20.50		23.50				
		11	2462		18.50		18.50		18.50		18.50		21.50				
		12	2467		17.50		17.50		17.50		17.50		20.50				
		13	2472		15.50		15.50		15.50		15.50		18.50				
	802.11ac-VHT40 MCS0	3	2422		16.00		16.00		16.00		16.00		19.00				
		6	2437		19.50		19.50		19.50		19.50		22.50				
		9	2452		17.50		17.50		17.50		17.50		20.50				
		10	2457		16.50		16.50		16.50		16.50		19.50				
		11	2462		16.00		16.00		16.00		16.00		19.00				
	802.11ax-HE20 MCS0	1	2412		17.50		17.50		17.50		17.50		20.50		20.50		23.50
		6	2437		21.50		20.50		20.50		20.50		23.50				
		11	2462		18.50		18.50		18.50		18.50		21.50				
		12	2467		17.50		17.50		17.50		17.50		20.50				
		13	2472		15.50		15.50		15.50		15.50		18.50				
	802.11ax-HE40 MCS0	3	2422		16.00		16.00		16.00		16.00		19.00				
		6	2437		19.50		19.50		19.50		19.50		22.50				
		9	2452		17.50		17.50		17.50		17.50		20.50				
		10	2457		16.50		16.50		16.50		16.50		19.50				
		11	2462		16.00		16.00		16.00		16.00		19.00				
	802.11be-EHT20 MCS0	1	2412		17.50		17.50		17.50		17.50		20.50		20.50		23.50
		6	2437		21.50		20.50		20.50		20.50		23.50				
		11	2462		18.50		18.50		18.50		18.50		21.50				
		12	2467		17.50		17.50		17.50		17.50		20.50				
		13	2472		15.50		15.50		15.50		15.50		18.50				
	802.11be-EHT40 MCS0	3	2422		16.00		16.00		16.00		16.00		19.00				
		6	2437		19.50		19.50		19.50		19.50		22.50				
		9	2452		17.50		17.50		17.50		17.50		20.50				
		10	2457		16.50		16.50		16.50		16.50		19.50				
11		2462	16.00		16.00		16.00		16.00		19.00						



				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		40	5200		15.50			17.50			15.50		15.50		18.50	
		44	5220		15.50			17.50			15.50		15.50		18.50	
		48	5240		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT20 MCS0	36	5180		15.50			17.50			15.50		15.50		18.50	
		40	5200		15.50			17.50			15.50		15.50		18.50	
		44	5220		15.50			17.50			15.50		15.50		18.50	
		48	5240		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT40 MCS0	38	5190		15.50			17.50			15.50		15.50		18.50	
		46	5230		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT20 MCS0	36	5180		15.50			17.50			15.50		15.50		18.50	
		40	5200		15.50			17.50			15.50		15.50		18.50	
		44	5220		15.50			17.50			15.50		15.50		18.50	
		48	5240		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT40 MCS0	38	5190		15.50			17.50			15.50		15.50		18.50	
		46	5230		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT80 MCS0	42	5210		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE20 MCS0	36	5180		15.50			17.50			15.50		15.50		18.50	
		40	5200		15.50			17.50			15.50		15.50		18.50	
		44	5220		15.50			17.50			15.50		15.50		18.50	
		48	5240		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE40 MCS0	38	5190		15.50			17.50			15.50		15.50		18.50	
		46	5230		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE80 MCS0	42	5210		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT20 MCS0	36	5180		15.50			17.50			15.50		15.50		18.50	
		40	5200		15.50			17.50			15.50		15.50		18.50	
		44	5220		15.50			17.50			15.50		15.50		18.50	
		48	5240		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT40 MCS0	38	5190		15.50			17.50			15.50		15.50		18.50	
		46	5230		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT80 MCS0	42	5210		15.50			17.50			15.50		15.50		18.50	

	Mode	Channel	Frequency (MHz)	Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
				Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50			17.50			15.50		15.50		18.50	
		60	5300		15.50			17.50			15.50		15.50		18.50	
		64	5320		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT20 MCS0	52	5260	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50			17.50			15.50		15.50		18.50	
		60	5300		15.50			17.50			15.50		15.50		18.50	
		64	5320		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT40 MCS0	54	5270	15.25	15.50	93.00	16.70	17.50	93.00	15.33	15.50	15.32	15.50	18.34	18.50	93.00
		62	5310	15.24	15.50		16.70	17.50		14.95	15.50	15.36	15.50	18.17	18.50	
	802.11ac-VHT20 MCS0	52	5260	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		56	5280		15.50			17.50			15.50		15.50		18.50	
		60	5300		15.50			17.50			15.50		15.50		18.50	
		64	5320		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT40 MCS0	54	5270	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		62	5310		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT80 MCS0	58	5290	15.50	15.50	87.50	17.13	17.50	87.50	15.27	15.50	15.44	15.50	18.37	18.50	87.50
	802.11ac-VHT160 MCS0	50	5250	Not Required	15.00	Not Required	Not Required	15.00	Not Required	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
	802.11ax-HE20 MCS0	52	5260		15.50			17.50			15.50		15.50		18.50	
		56	5280		15.50			17.50			15.50		15.50		18.50	
		60	5300		15.50			17.50			15.50		15.50		18.50	
		64	5320		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE40 MCS0	54	5270		15.50			17.50			15.50		15.50		18.50	
		62	5310		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE80 MCS0	58	5290		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE160 MCS0	50	5250		15.00			15.00			15.00		15.00		18.00	
	802.11be-EHT20 MCS0	52	5260		15.50			17.50			15.50		15.50		18.50	
		56	5280		15.50			17.50			15.50		15.50		18.50	
		60	5300		15.50			17.50			15.50		15.50		18.50	
		64	5320		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT40 MCS0	54	5270		15.50			17.50			15.50		15.50		18.50	
		62	5310		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT80 MCS0	58	5290		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT160 MCS0	50	5250		15.00			15.00			15.00		15.00		18.00	



				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	13.50	Not Required	Not Required	16.50	Not Required	Not Required	13.50	Not Required	13.50	Not Required	16.50	Not Required
		116	5580		13.50			16.50			13.50		16.50			
		124	5620		13.50			16.50			13.50		16.50			
		132	5660		13.50			16.50			13.50		16.50			
		140	5700		13.50			16.50			13.50		16.50			
		144	5720		13.50			16.50			13.50		16.50			
	802.11n-HT20 MCS0	100	5500		13.50			16.50			13.50		16.50			
		116	5580		13.50			16.50			13.50		16.50			
		124	5620		13.50			16.50			13.50		16.50			
		132	5660		13.50			16.50			13.50		16.50			
		140	5700		13.50			16.50			13.50		16.50			
		144	5720		13.50			16.50			13.50		16.50			
	802.11n-HT40 MCS0	102	5510		13.50			16.50			13.50		16.50			
		110	5550		13.50			16.50			13.50		16.50			
		126	5630		13.50			16.50			13.50		16.50			
		142	5710		13.50			16.50			13.50		16.50			
	802.11ac-VHT20 MCS0	100	5500		13.50			16.50			13.50		16.50			
		116	5580		13.50			16.50			13.50		16.50			
		124	5620		13.50			16.50			13.50		16.50			
		132	5660		13.50			16.50			13.50		16.50			
		140	5700		13.50			16.50			13.50		16.50			
		144	5720		13.50			16.50			13.50		16.50			
	802.11ac-VHT40 MCS0	102	5510		13.50			16.50			13.50		16.50			
		110	5550		13.50			16.50			13.50		16.50			
		126	5630		13.50			16.50			13.50		16.50			
		134	5670		13.50			16.50			13.50		16.50			
	802.11ac-VHT80 MCS0	106	5530	12.95	13.50	87.50	15.85	16.50	87.50	13.43	13.50	13.11	13.50	16.28	16.50	87.50
		122	5610	12.70	13.50		16.13	16.50		13.25	13.50	13.34	13.50	16.31	16.50	
		138	5690	12.60	13.50		16.20	16.50		13.26	13.50	13.35	13.50	16.32	16.50	
	802.11ac-VHT160 MCS0	114	5570	13.09	13.50	87.00		16.50		13.26	13.50	13.42	13.50	16.35	16.50	87.00
	802.11ax-HE20 MCS0	100	5500	Not Required	13.50	Not Required	Not Required	16.50	Not Required	Not Required	13.50	Not Required	13.50	Not Required	16.50	Not Required
		116	5580		13.50			16.50			13.50		16.50			
		124	5620		13.50			16.50			13.50		16.50			
		132	5660		13.50			16.50			13.50		16.50			
		140	5700		13.50			16.50			13.50		16.50			
		144	5720		13.50			16.50			13.50		16.50			
	802.11ax-HE40 MCS0	102	5510		13.50			16.50			13.50		16.50			
		110	5550		13.50			16.50			13.50		16.50			
		126	5630		13.50			16.50			13.50		16.50			
		134	5670		13.50			16.50			13.50		16.50			
	802.11ax-HE80 MCS0	106	5530		13.50			16.50			13.50		16.50			
		122	5610		13.50			16.50			13.50		16.50			
		138	5690		13.50			16.50			13.50		16.50			
	802.11ax-HE160 MCS0	114	5570		13.50			16.50			13.50		16.50			
	802.11be-EHT20 MCS0	100	5500		13.50			16.50			13.50		16.50			
		116	5580		13.50			16.50			13.50		16.50			
		124	5620		13.50			16.50			13.50		16.50			



FCC SAR TEST REPORT

Report No. : FA492709-03

		132	5660		13.50			16.50			13.50		13.50		16.50	
		140	5700		13.50			16.50			13.50		13.50		16.50	
		144	5720		13.50			16.50			13.50		13.50		16.50	
	802.11be-EHT40 MCS0	102	5510		13.50			16.50			13.50		13.50		16.50	
		110	5550		13.50			16.50			13.50		13.50		16.50	
		126	5630		13.50			16.50			13.50		13.50		16.50	
		134	5670		13.50			16.50			13.50		13.50		16.50	
		142	5710		13.50			16.50			13.50		13.50		16.50	
	802.11be-EHT80 MCS0	106	5530		13.50			16.50			13.50		13.50		16.50	
		122	5610		13.50			16.50			13.50		13.50		16.50	
		138	5690		13.50			16.50			13.50		13.50		16.50	
	802.11be-EHT160 MCS0	114	5570		13.50			16.50			13.50		13.50		16.50	

				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		157	5785		14.50			17.50			14.50		14.50		17.50	
		165	5825		14.50			17.50			14.50		14.50		17.50	
	802.11n-HT20 MCS0	149	5745	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		157	5785		14.50			17.50			14.50		14.50		17.50	
		165	5825		14.50			17.50			14.50		14.50		17.50	
	802.11n-HT40 MCS0	151	5755	14.35	14.50	93.00	17.36	17.50	93.00	14.46	14.50	14.49	14.50	17.49	17.50	93.00
		159	5795		14.50			17.35			14.44		14.50		17.35	
	802.11ac-VHT20 MCS0	149	5745	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		157	5785		14.50			17.50			14.50		14.50		17.50	
		165	5825		14.50			17.50			14.50		14.50		17.50	
	802.11ac-VHT40 MCS0	151	5755	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		159	5795		14.50			17.50			14.50		14.50		17.50	
	802.11ac-VHT80 MCS0	155	5775	14.45	14.50	87.50	17.45	17.50	87.50	14.41	14.50	14.34	14.50	17.39	17.50	87.50
	802.11ax-HE20 MCS0	149	5745	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		157	5785		14.50			17.50			14.50		14.50		17.50	
		165	5825		14.50			17.50			14.50		14.50		17.50	
	802.11ax-HE40 MCS0	151	5755	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		159	5795		14.50			17.50			14.50		14.50		17.50	
	802.11ax-HE80 MCS0	155	5775	14.45	14.50	87.50	17.45	17.50	87.50	14.41	14.50	14.34	14.50	17.39	17.50	87.50
	802.11be-EHT20 MCS0	149	5745	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		157	5785		14.50			17.50			14.50		14.50		17.50	
		165	5825		14.50			17.50			14.50		14.50		17.50	
	802.11be-EHT40 MCS0	151	5755	Not Required	14.50	Not Required	Not Required	17.50	Not Required	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required
		159	5795		14.50			17.50			14.50		14.50		17.50	
	802.11be-EHT80 MCS0	155	5775	14.45	14.50	87.50	17.45	17.50	87.50	14.41	14.50	14.34	14.50	17.39	17.50	87.50



				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.9GHz WLAN	802.11a 6Mbps	169	5845	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		173	5865		15.50			17.50			15.50		15.50		18.50	
		177	5885		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT20 MCS0	169	5845		15.50			17.50			15.50		15.50		18.50	
		173	5865		15.50			17.50			15.50		15.50		18.50	
		177	5885		15.50			17.50			15.50		15.50		18.50	
	802.11n-HT40 MCS0	167	5835		15.50			17.50			15.50		15.50		18.50	
		175	5875		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT20 MCS0	169	5845		15.50			17.50			15.50		15.50		18.50	
		173	5865		15.50			17.50			15.50		15.50		18.50	
		177	5885		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT40 MCS0	167	5835		15.50			17.50			15.50		15.50		18.50	
		175	5875		15.50			17.50			15.50		15.50		18.50	
	802.11ac-VHT80 MCS0	171	5855	15.03	15.50	87.50	17.11	17.50	87.00	15.48	15.50	15.18	15.50	18.34	18.50	87.50
	802.11ac-VHT160 MCS0	163	5815	15.03	15.50	87.00	17.15	17.50	87.00	15.38	15.50	15.29	15.50	18.35	18.50	87.00
	802.11ax-HE20 MCS0	169	5845	Not Required	15.50	Not Required	Not Required	17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		173	5865		15.50			17.50			15.50		15.50		18.50	
		177	5885		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE40 MCS0	167	5835		15.50			17.50			15.50		15.50		18.50	
		175	5875		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE80 MCS0	171	5855		15.50			17.50			15.50		15.50		18.50	
	802.11ax-HE160 MCS0	163	5815		15.50			17.50		15.14	15.50	15.16	15.50	18.16	18.50	87.00
	802.11be-EHT20 MCS0	169	5845		15.50			17.50	Not Required	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		173	5865		15.50			17.50			15.50		15.50		18.50	
		177	5885		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT40 MCS0	167	5835		15.50			17.50			15.50		15.50		18.50	
		175	5875		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT80 MCS0	171	5855		15.50			17.50			15.50		15.50		18.50	
	802.11be-EHT160 MCS0	163	5815		15.50			17.50			15.50		15.50		18.50	



				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
WiFi 6E (LPI)	802.11a 6Mbps	1	5955	Not Required	7.00	Not Required	Not Required	7.00	Not Required	Not Required	7.00	Not Required	7.00	Not Required	10.00	Not Required	
		57	6235		7.00			7.00			7.00		7.00		10.00		
		113	6515		7.00			7.00			7.00		7.00		10.00		
		173	6815		7.00			7.00			7.00		7.00		10.00		
		233	7115		7.50			7.50			7.50		7.50		10.50		
	802.11ax-HE20 MCS0	1	5955		7.00			7.00			7.00		7.00		10.00		
		57	6235		7.50			7.50			7.50		7.50		10.50		
		113	6515		9.50			9.50			9.50		9.50		12.50		
		173	6815		9.50			9.50			9.50		9.50		12.50		
		233	7115		10.00			10.00			10.00		10.00		13.00		
	802.11ax-HE40 MCS0	3	5965		9.50			9.50			9.50		9.50		12.50		
		59	6245		10.00			10.00			10.00		10.00		13.00		
		107	6485		12.50			12.50			12.50		12.50		15.50		
		171	6805		12.50			12.50			12.50		12.50		15.50		
		227	7085		12.50			12.50			12.50		12.50		15.50		
	802.11ax-HE80 MCS0	7	5985		12.50			12.50			12.50		12.50		15.50		
		71	6305		13.00			13.00			13.00		13.00		16.00		
		119	6545		11.00			15.00			11.00		11.00		14.00		
		167	6785		14.00			15.00			14.00		14.00		17.00		
		215	7025		15.00			15.50			15.00		15.00		18.00		
	802.11ax-HE160 MCS0	15	6025	13.09	13.50	87.00		14.71	15.00	86.80	12.96	13.50	13.07	13.50	16.03	16.50	86.80
		47	6185	13.35	13.50			14.76	15.00		13.17	13.50	13.42	13.50	16.31	16.50	
		111	6505	10.01	11.00			13.32	14.50		10.00	11.00	9.88	11.00	13.08	14.00	
		143	6665	13.91	14.50			14.69	15.50		14.32	14.50	13.84	14.50	17.10	17.50	
		207	6985	14.98	15.00			15.25	15.50		14.98	15.00	15.00	15.00	18.00	18.00	
	802.11be-EHT20 MCS0	1	5955	Not Required	7.00	Not Required	Not Required	7.00	Not Required	Not Required	7.00	Not Required	7.00	Not Required	10.00	Not Required	
		57	6235		7.50			7.50			7.50		7.50		10.50		
		113	6515		9.50			9.50			9.50		9.50		12.50		
		173	6815		9.50			9.50			9.50		9.50		12.50		
		233	7115		10.00			10.00			10.00		10.00		13.00		
	802.11be-EHT40 MCS0	3	5965		9.50			9.50			9.50		9.50		12.50		
		59	6245		10.00			10.00			10.00		10.00		13.00		
		107	6485		12.50			12.50			12.50		12.50		15.50		
		171	6805		12.50			12.50			12.50		12.50		15.50		
		227	7085		12.50			12.50			12.50		12.50		15.50		
	802.11be-EHT80 MCS0	7	5985		12.50			12.50			12.50		12.50		15.50		
		71	6305		13.00			13.00			13.00		13.00		16.00		
		119	6545		11.00			15.00			11.00		11.00		14.00		
		167	6785		14.00			15.00			14.00		14.00		17.00		
		215	7025		15.00			15.50			15.00		15.00		18.00		
	802.11be-EHT160 MCS0	15	6025		13.50			15.00			13.50		13.50		16.50		
		47	6185		13.50			15.00			13.50		13.50		16.50		
		111	6505		11.00			14.50			11.00		11.00		14.00		
		143	6665		14.50			15.50			14.50		14.50		17.50		
		207	6985		15.00			15.50			15.00		15.00		18.00		




				Main Ant			Aux Ant			Main+Aux Ant (Main)		Main+Aux Ant (Aux)		Main+Aux Ant			
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
WiFi 6E (SP)	802.11a 6Mbps	1	5955	Not Required	13.50	Not Required	Not Required	15.00	Not Required	Not Required	13.50	Not Required	13.50	Not Required	16.50	Not Required	
		57	6235		13.50			15.00			13.50		13.50		16.50		
		145	6675		14.50			16.00			14.50		14.50		17.50		
	802.11ax-HE20 MCS0	1	5955		13.50		Not Required	15.00	Not Required		13.50		13.50		16.50		
		57	6235		13.50			15.00			13.50		13.50		16.50		
		145	6675		14.50			16.00			14.50		14.50		17.50		
	802.11ax-HE40 MCS0	3	5965		13.50		14.43	15.00	88.30		13.50		13.50		16.50		
		59	6245		13.50		14.44	15.00			13.50		13.50		16.50		
		171	6805		14.50		15.44	16.00			14.50		14.50		17.50		
	802.11ax-HE80 MCS0	7	5985	13.17	13.50	88.30	Not Required	15.00	Not Required		13.05	13.50	13.20	13.50	16.14	16.50	
		71	6305	12.99	13.50			15.00			12.91	13.50	13.24	13.50	16.09	16.50	
		167	6785	14.08	14.50			16.00			14.22	14.50	13.15	14.50	16.73	17.50	
	802.11ax-HE160 MCS0	15	6025	13.09	13.50	87.00	Not Required	14.71	15.00	86.80	12.96	13.50	13.07	13.50	16.03	16.50	
		47	6185	13.35	13.50			14.76	15.00		13.17	13.50	13.42	13.50	16.31	16.50	
		143	6665	13.91	14.50			14.69	16.00		14.32	14.50	13.84	14.50	17.10	17.50	
	802.11be-EHT20 MCS0	1	5955	Not Required	13.50	Not Required	Not Required	15.00	Not Required	Not Required	13.50	Not Required	13.50	Not Required	16.50	Not Required	
		57	6235		13.50			15.00			13.50		13.50		16.50		
		145	6675		14.50			16.00			14.50		14.50		17.50		
	802.11be-EHT40 MCS0	3	5965		13.50			15.00			13.50		13.50		16.50		
		59	6245		13.50			15.00			13.50		13.50		16.50		
		171	6805		14.50			16.00			14.50		14.50		17.50		
	802.11be-EHT80 MCS0	7	5985		13.50			15.00			13.50		13.50		16.50		
		71	6305		13.50			15.00			13.50		13.50		16.50		
		167	6785		14.50			16.00			14.50		14.50		17.50		
	802.11be-EHT160 MCS0	15	6025		13.50			15.00			13.50		13.50		16.50		
		47	6185		13.50			15.00			13.50		13.50		16.50		
		143	6665		14.50			16.00			14.50		14.50		17.50		

<2.4GHz Bluetooth>

				Aux Ant		
Bluetooth	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	BR / EDR 1Mbps	0	2402	11.40	11.50	76.70
		39	2441	11.40	11.50	
		78	2480	11.40	11.50	
	BR / EDR 2Mbps	0	2402	Not Required	8.50	Not Required
		39	2441		8.50	
		78	2480		8.50	
	BR / EDR 3Mbps	0	2402		8.50	
		39	2441		8.50	
		78	2480		8.50	
	LE 1Mbps	0	2402		11.50	
		19	2440		11.50	
		39	2480		11.50	
	LE 2Mbps	0	2402		11.50	
		19	2440		11.50	
		39	2480		11.50	

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.70% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

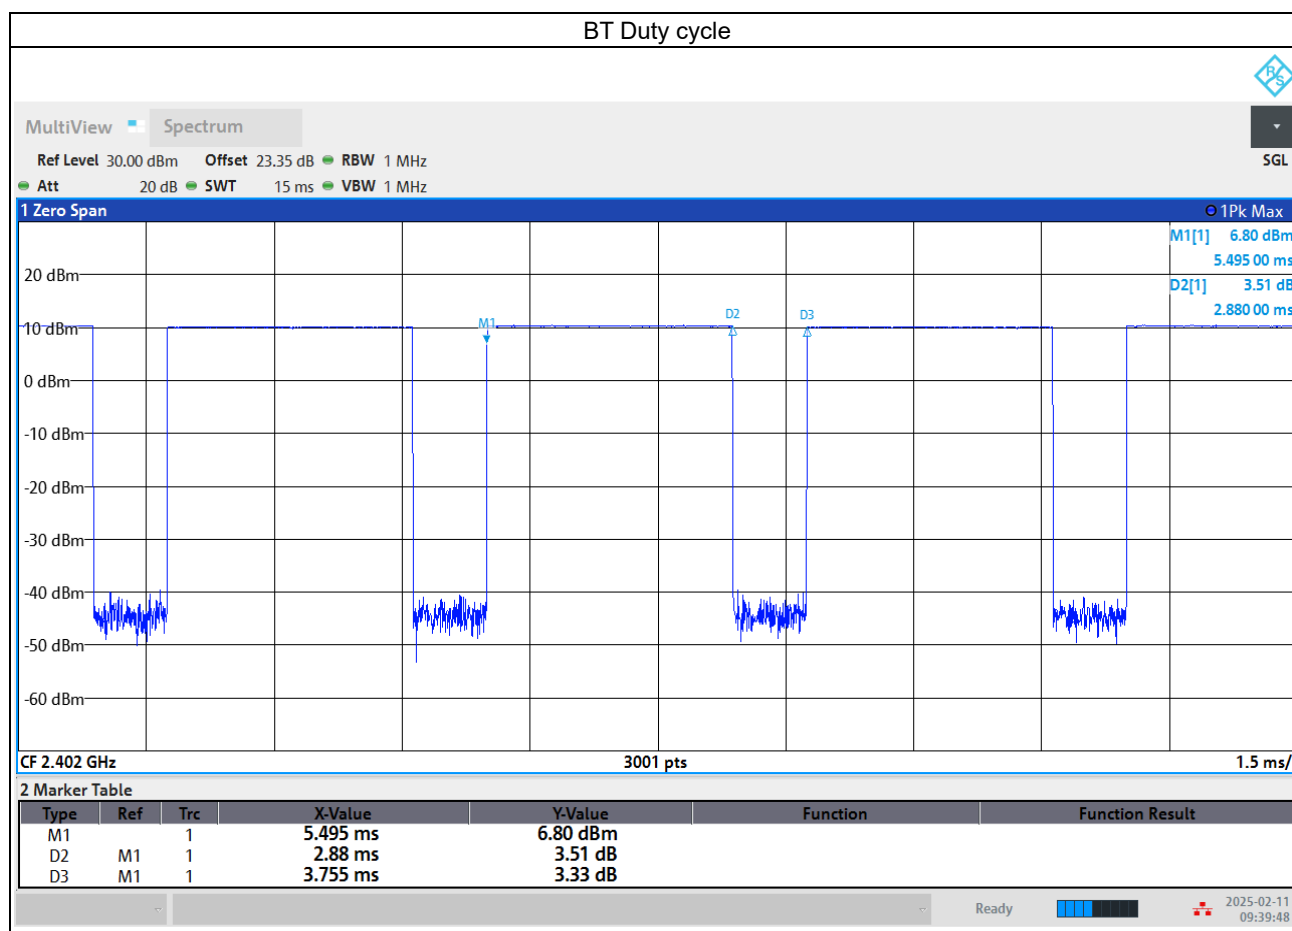

<SAR test exclusion table>
General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT Aux	2.4GHz WLAN Main	2.4GHz WLAN Aux	5/6GHz WLAN Main	5/6GHz WLAN Aux
	Calculated Frequency (MHz)	2480	2472	2472	7115	7115
	Maximum power (dBm)	11.5	22.5	20.5	15.5	17.5
	Maximum rated power(mW)	14.13	177.83	112.20	35.48	56.23
Bottom Side	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	4.5	55.9	35.3	18.9	30.0
	Testing required?	Yes	Yes	Yes	Yes	Yes

11. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For 2.4GHz WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

WLAN PD Note:

1. The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
2. First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method.
3. Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty $> 30\%$. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
4. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 12.
6. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
7. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
8. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

**11.1 Body SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Main	6	2437	SPEED	22.10	22.50	1.096	97.4	1.027	0.06	0.350	0.394
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Main	6	2437	ATC	22.10	22.50	1.096	97.4	1.027	0.08	0.314	0.354
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Main	6	2437	ICT	22.10	22.50	1.096	97.4	1.027	0.01	0.295	0.332
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Aux	11	2462	SPEED	20.05	20.50	1.109	97.4	1.027	0.05	0.287	0.327
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Aux	11	2462	ATC	20.05	20.50	1.109	97.4	1.027	0.08	0.247	0.281
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	0mm	Aux	11	2462	ICT	20.05	20.50	1.109	97.4	1.027	0.01	0.225	0.256
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	58	5290	SPEED	15.50	15.50	1.000	87.5	1.143	0.03	0.749	0.856
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main	54	5270	SPEED	15.25	15.50	1.059	93	1.075	-0.08	0.733	0.835
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	58	5290	ATC	15.50	15.50	1.000	87.5	1.143	-0.08	0.748	0.855
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main	54	5270	ATC	15.25	15.50	1.059	93	1.075	0.1	0.661	0.753
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	58	5290	ICT	15.50	15.50	1.000	87.5	1.143	0.02	1.030	1.177
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main	54	5270	ICT	15.25	15.50	1.059	93	1.075	-0.18	0.939	1.069
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	58	5290	SPEED	17.13	17.50	1.089	87.5	1.143	0.1	0.693	0.863
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Aux	54	5270	SPEED	16.70	17.50	1.202	93	1.075	0.12	0.645	0.834
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	58	5290	ATC	17.13	17.50	1.089	87.5	1.143	0.08	0.591	0.736
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Aux	54	5270	ATC	16.70	17.50	1.202	93	1.075	-0.17	0.550	0.711
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	58	5290	ICT	17.13	17.50	1.089	87.5	1.143	0.07	0.952	1.185
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Aux	54	5270	ICT	16.70	17.50	1.202	93	1.075	-0.03	0.873	1.128
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	58	5290	SPEED	15.27	15.50	1.054	87.5	1.143	0.03	0.650	0.783
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	58	5290	SPEED	15.44	15.50	1.014	87.5	1.143	0.03	0.562	0.651
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	58	5290	ATC	15.27	15.50	1.054	87.5	1.143	0.06	0.639	0.770
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	58	5290	ATC	15.44	15.50	1.014	87.5	1.143	0.06	0.553	0.641
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	58	5290	ICT	15.27	15.50	1.054	87.5	1.143	0.04	0.909	1.095
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	58	5290	ICT	15.44	15.50	1.014	87.5	1.143	0.04	0.786	0.911
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Main)	54	5270	ICT	15.33	15.50	1.040	93	1.075	0.06	0.875	0.978
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Aux)	54	5270	ICT	15.32	15.50	1.042	93	1.075	0.06	0.757	0.848
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	114	5570	SPEED	13.09	13.50	1.099	87	1.149	-0.08	0.611	0.772
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	114	5570	ATC	13.09	13.50	1.099	87	1.149	-0.18	0.503	0.635
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	114	5570	ICT	13.09	13.50	1.099	87	1.149	0.02	0.947	1.196
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	106	5530	ICT	12.95	13.50	1.135	87.5	1.143	0.12	0.919	1.192
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	138	5690	SPEED	16.20	16.50	1.072	87.5	1.143	0.08	0.478	0.585
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	138	5690	ATC	16.20	16.50	1.072	87.5	1.143	0.14	0.352	0.431
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	138	5690	ICT	16.20	16.50	1.072	87.5	1.143	0.18	0.711	0.871
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	106	5530	ICT	15.85	16.50	1.161	87.5	1.143	0.08	0.897	1.191
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	114	5570	SPEED	13.26	13.50	1.057	87	1.149	0.1	0.595	0.722
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	114	5570	SPEED	13.42	13.50	1.019	87	1.149	-0.17	0.364	0.426
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	114	5570	ATC	13.26	13.50	1.057	87	1.149	-0.08	0.488	0.593
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	114	5570	ATC	13.42	13.50	1.019	87	1.149	0.13	0.298	0.349
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	114	5570	ICT	13.26	13.50	1.057	87	1.149	0.18	0.867	1.053
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	114	5570	ICT	13.42	13.50	1.019	87	1.149	-0.1	0.530	0.620
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	106	5530	ICT	13.43	13.50	1.016	87.5	1.143	-0.13	0.974	1.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	106	5530	ICT	13.11	13.50	1.094	87.5	1.143	-0.13	0.596	0.745
04	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	155	5775	SPEED	14.45	14.50	1.012	87.5	1.143	-0.18	0.800	0.925
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	155	5775	ATC	14.45	14.50	1.012	87.5	1.143	-0.15	0.690	0.798
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	155	5775	ICT	14.45	14.50	1.012	87.5	1.143	0.06	1.020	1.179
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main	151	5755	ICT	14.35	14.50	1.035	93	1.075	0.11	0.958	1.066
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	155	5775	SPEED	17.45	17.50	1.012	87.5	1.143	0.02	0.674	0.779
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	155	5775	ATC	17.45	17.50	1.012	87.5	1.143	-0.04	0.515	0.595
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	155	5775	ICT	17.45	17.50	1.012	87.5	1.143	0.19	0.968	1.119



FCC SAR TEST REPORT

Report No. : FA492709-03

	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Aux	151	5755	ICT	17.36	17.50	1.033	93	1.075	0.17	0.917	1.018
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	155	5775	SPEED	14.41	14.50	1.021	87.5	1.143	0.01	0.709	0.827
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	155	5775	SPEED	14.34	14.50	1.038	87.5	1.143	0.01	0.404	0.479
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Main)	151	5755	SPEED	14.46	14.50	1.009	93	1.075	0.03	0.679	0.737
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Aux)	151	5755	SPEED	14.49	14.50	1.002	93	1.075	0.03	0.387	0.417
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	155	5775	ATC	14.41	14.50	1.021	87.5	1.143	0.1	0.680	0.794
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	155	5775	ATC	14.34	14.50	1.038	87.5	1.143	0.1	0.388	0.460
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	155	5775	ICT	14.41	14.50	1.021	87.5	1.143	-0.02	1.000	1.167
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	155	5775	ICT	14.34	14.50	1.038	87.5	1.143	-0.02	0.570	0.676
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Main)	151	5755	ICT	14.46	14.50	1.009	93	1.075	0.12	1.070	1.161
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Aux)	151	5755	ICT	14.49	14.50	1.002	93	1.075	0.12	0.607	0.654
05	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	163	5815	SPEED	15.03	15.50	1.114	87	1.149	-0.08	0.935	1.197
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	171	5855	SPEED	15.03	15.50	1.114	87.5	1.143	-0.17	0.901	1.148
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	163	5815	ATC	15.03	15.50	1.114	87	1.149	-0.03	0.911	1.166
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	171	5855	ATC	15.03	15.50	1.114	87.5	1.143	0.14	0.821	1.046
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main	163	5815	ICT	15.03	15.50	1.114	87	1.149	0.11	0.908	1.163
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	171	5855	ICT	15.03	15.50	1.114	87.5	1.143	-0.05	0.832	1.060
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Aux	163	5815	SPEED	17.15	17.50	1.084	87	1.149	0.14	0.555	0.691
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Aux	163	5815	ATC	17.15	17.50	1.084	87	1.149	0.17	0.838	1.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	171	5855	ATC	17.11	17.50	1.094	87	1.149	-0.05	0.641	0.806
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Aux	163	5815	ICT	17.15	17.50	1.084	87	1.149	0.01	0.897	1.117
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Aux	171	5855	ICT	17.11	17.50	1.094	87	1.149	0.01	0.873	1.097
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	163	5815	SPEED	15.38	15.50	1.028	87	1.149	0.1	0.811	0.958
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	163	5815	SPEED	15.29	15.50	1.050	87	1.149	-0.17	0.527	0.636
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	171	5855	SPEED	15.48	15.50	1.005	87.5	1.143	0.04	0.719	0.826
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	171	5855	SPEED	15.18	15.50	1.076	87.5	1.143	-0.01	0.576	0.709
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	163	5815	ATC	15.38	15.50	1.028	87	1.149	-0.08	0.888	1.049
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	163	5815	ATC	15.29	15.50	1.050	87	1.149	0.05	0.603	0.727
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	171	5855	ATC	15.48	15.50	1.005	87.5	1.143	0.06	0.929	1.067
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	171	5855	ATC	15.18	15.50	1.076	87.5	1.143	-0.09	0.653	0.803
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Main)	163	5815	ICT	15.38	15.50	1.028	87	1.149	-0.08	1.010	1.193
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Side	0mm	Main+Aux(Aux)	163	5815	ICT	15.29	15.50	1.050	87	1.149	0.13	0.675	0.814
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	171	5855	ICT	15.48	15.50	1.005	87.5	1.143	0.16	1.040	1.194
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	171	5855	ICT	15.18	15.50	1.076	87.5	1.143	0.16	0.675	0.831

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m^2)	Reported APD (W/m^2)
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	207	6985	SPEED	14.98	15.00	1.005	87	1.149	-0.1	0.336	0.388	2.44	2.817
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	15	6025	SPEED	13.09	13.50	1.099	87	1.149	0.12	0.250	0.316	1.95	2.462
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	47	6185	SPEED	13.35	13.50	1.035	87	1.149	0.03	0.302	0.359	2.19	2.605
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	111	6505	SPEED	10.01	11.00	1.256	87	1.149	0.18	0.265	0.382	1.9	2.742
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	143	6665	SPEED	13.91	14.50	1.146	87	1.149	0.16	0.250	0.329	1.77	2.330
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	207	6985	ATC	14.98	15.00	1.005	87	1.149	0.07	0.271	0.313	2.01	2.320
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Main	207	6985	ICT	14.98	15.00	1.005	87	1.149	-0.05	0.436	0.503	3.27	3.775
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	47	6185	SPEED	14.76	15.00	1.057	86.8	1.152	0.01	0.386	0.470	2.9	3.531
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	15	6025	SPEED	14.71	15.00	1.069	86.8	1.152	-0.1	0.483	0.595	3.69	4.544
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	111	6505	SPEED	13.32	14.50	1.312	86.8	1.152	-0.15	0.322	0.487	2.48	3.749
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	143	6665	SPEED	14.69	15.50	1.205	86.8	1.152	0.19	0.271	0.376	2.21	3.068
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	207	6985	SPEED	15.25	15.50	1.059	86.8	1.152	0.07	0.236	0.288	1.99	2.428
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	15	6025	ATC	14.71	15.00	1.069	86.8	1.152	-0.18	0.434	0.534	3.4	4.187
06	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	0mm	Aux	15	6025	ICT	14.71	15.00	1.069	86.8	1.152	0.08	0.501	0.617	3.91	4.815

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Side	0mm	Aux	0	2402	SPEED	11.40	11.50	1.023	76.7	1.086	0	0.011	0.012
	Bluetooth	1Mbps	Bottom Side	0mm	Aux	0	2402	ATC	11.40	11.50	1.023	76.7	1.086	0.02	0.010	0.011
07	Bluetooth	1Mbps	Bottom Side	0mm	Aux	0	2402	ICT	11.40	11.50	1.023	76.7	1.086	0.09	0.013	0.014

11.2 6GHz PD Test Result

Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	15	6025	13.09	0.0625	2.35	-0.48887886	2.51	2.68
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	10mm	Main	SPEED	15	6025	13.09	0.25	2.63		1.34	1.49
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	207	6985	14.98	0.0625	3.83	-0.96229123	2.66	2.91
WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	8.59mm	Main	SPEED	207	6985	14.98	0.25	4.78		1.85	2.22

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	15	6025	13.09	13.50	1.099	87.00	1.149	0.0625	1.5535	0.03	2.51	4.92	2.68	5.26
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	47	6185	13.35	13.50	1.035	87.00	1.149	0.0625	1.5535	-0.08	2.32	4.29	2.54	4.69
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	111	6505	10.01	11.00	1.256	87.00	1.149	0.0625	1.5535	-0.08	1.88	4.21	2.06	4.62
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	143	6665	13.91	14.50	1.146	87.00	1.149	0.0625	1.5535	0.1	1.96	4.01	2.14	4.38
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	SPEED	207	6985	14.98	15.00	1.005	87.00	1.149	0.0625	1.5535	0	2.66	4.77	2.91	5.22
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	ATC	15	6025	13.09	13.50	1.099	87.00	1.149	0.0625	1.5535	0.04	1.79	3.51	2.07	4.06
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Main	ICT	15	6025	13.09	13.50	1.099	87.00	1.149	0.0625	1.5535	0.06	2.9	5.69	3.74	7.34
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	SPEED	15	6025	14.71	15.00	1.069	86.80	1.152	0.0625	1.5535	-0.01	2.8	5.36	3.09	5.91
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	SPEED	47	6185	14.76	15.00	1.057	86.80	1.152	0.0625	1.5535	0.08	2.17	4.10	2.39	4.52
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	SPEED	111	6505	13.32	14.50	1.312	86.80	1.152	0.0625	1.5535	0.01	2.19	5.14	2.41	5.66
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	SPEED	143	6665	14.69	15.50	1.205	86.80	1.152	0.0625	1.5535	0.03	2.11	4.55	2.32	5.00
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	SPEED	207	6985	15.25	15.50	1.059	86.80	1.152	0.0625	1.5535	0.06	2.26	4.28	2.54	4.82
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	ATC	15	6025	14.71	15.00	1.069	86.80	1.152	0.0625	1.5535	0.09	2.68	5.13	3.05	5.84
01	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Side	2mm	Aux	ICT	15	6025	14.71	15.00	1.069	86.80	1.152	0.0625	1.5535	0.02	3.56	6.81	3.9	7.46

11.3 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	58	5290	ICT	15.50	15.50	1.000	87.5	1.143	0.02	1.030	-	1.177
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main	58	5290	ICT	15.50	15.50	1.000	87.5	1.143	0.04	1.000	1.03	1.143
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	106	5530	ICT	13.43	13.50	1.016	87.5	1.143	-0.13	0.974	-	1.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	106	5530	ICT	13.11	13.50	1.094	87.5	1.143	-0.13	0.596		0.745
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	106	5530	ICT	13.43	13.50	1.016	87.5	1.143	0.08	0.936	1.04	1.087
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	106	5530	ICT	13.11	13.50	1.094	87.5	1.143	0.08	0.558		0.698
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Main)	151	5755	ICT	14.46	14.50	1.009	93	1.075	0.12	1.070	-	1.161
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Aux)	151	5755	ICT	14.49	14.50	1.002	93	1.075	0.12	0.607		0.654
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Main)	151	5755	ICT	14.46	14.50	1.009	93	1.075	0.09	0.989	1.08	1.073
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	0mm	Main+Aux(Aux)	151	5755	ICT	14.49	14.50	1.002	93	1.075	0.09	0.562		0.606
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	171	5855	ICT	15.48	15.50	1.005	87.5	1.143	0.16	1.040	-	1.194
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	171	5855	ICT	15.18	15.50	1.076	87.5	1.143	0.16	0.675		0.831
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Main)	171	5855	ICT	15.48	15.50	1.005	87.5	1.143	-0.05	0.990	1.05	1.137
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Main+Aux(Aux)	171	5855	ICT	15.18	15.50	1.076	87.5	1.143	-0.05	0.601		0.739

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WLAN2.4GHz Main + WLAN2.4GHz Aux	Yes
2.	WLAN2.4GHz Aux + WLAN5/6GHz Main	Yes
3.	WLAN5/6GHz MIMO + Bluetooth Aux	Yes

General Note:

1. For 2.4GHz WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.

12.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	6	1+2 Summed 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)	5+6 Summed 1g SAR (W/kg)
	WLAN2.4GHz Main 1g SAR (W/kg)	WLAN2.4GHz Aux 1g SAR (W/kg)	WLAN5/6GHz Main 1g SAR (W/kg)	WLAN5/6GHz Aux 1g SAR (W/kg)	WLAN5/6GHz MIMO 1g SAR (W/kg)	Bluetooth Aux 1g SAR (W/kg)			
Bottom Side at 0mm	0.394	0.327	1.197	1.191	1.194	0.014	0.721	1.524	1.208

Test Engineer : Tony Wu

13. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependance	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dep endent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68

14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [9] IEC/IEEE 62209-1528:2020, "Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)", Oct. 2020
- [10] SPEAG DASY6 System Handbook
- [11] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)