




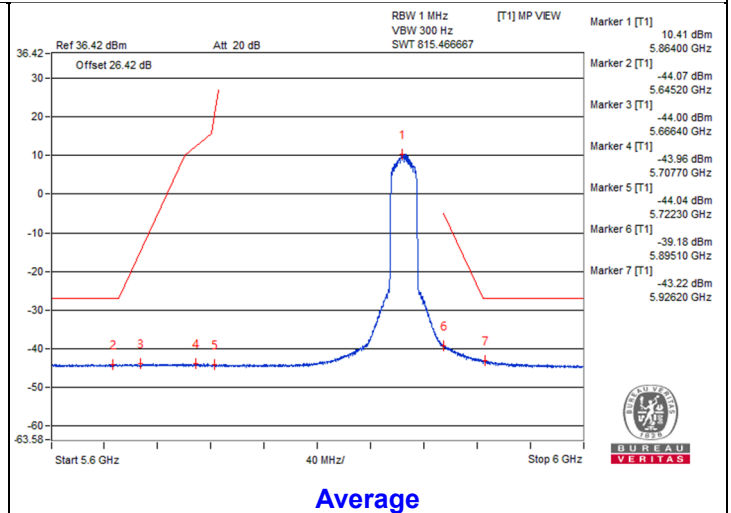


Bandedge table

Chain 0

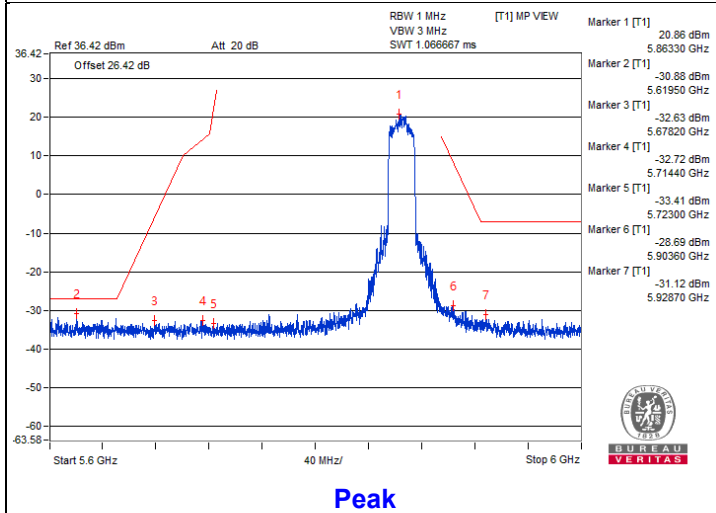

Chain 1

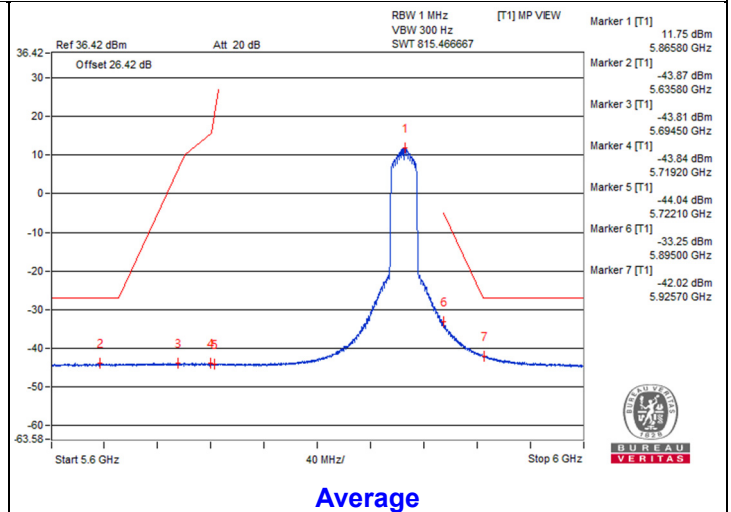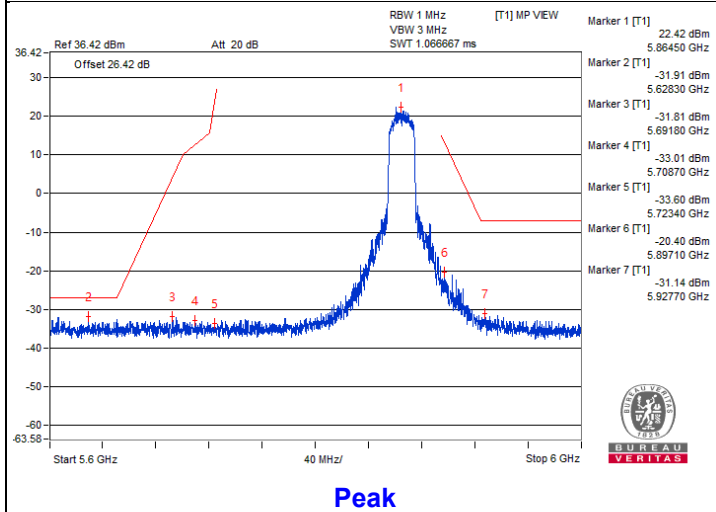

802.11be (EHT20) - Channel 177
Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3923.43	56.06 PK	74	-17.94	-46.06	-48.54	4.92	-39.20
2	3915.62	45.41 AV	54	-8.59	-57.62	-57.95	4.92	-49.85
3	#7842.18	54.81 PK	68.2	-13.39	-48.1	-48.69	4.92	-40.45
4	11778.75	56.06 PK	74	-17.94	-49.15	-45.76	4.92	-39.20
5	11784.37	43.97 AV	54	-10.03	-59.06	-59.38	4.92	-51.29
6	#17645.75	54.97 PK	68.2	-13.23	-48.51	-47.94	4.92	-40.29

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

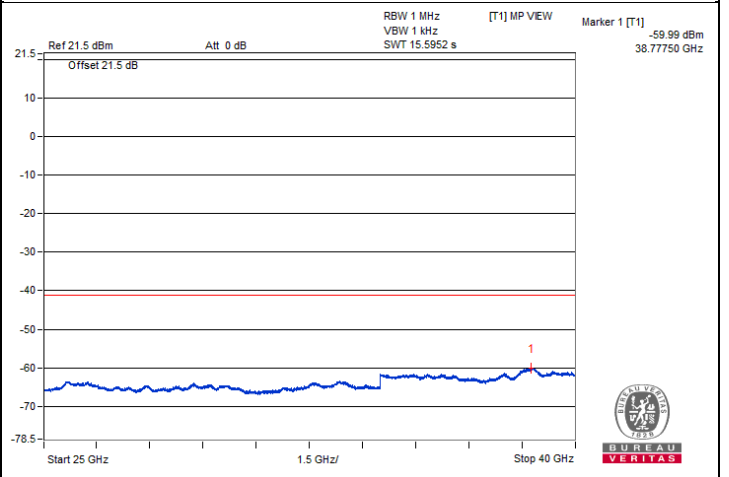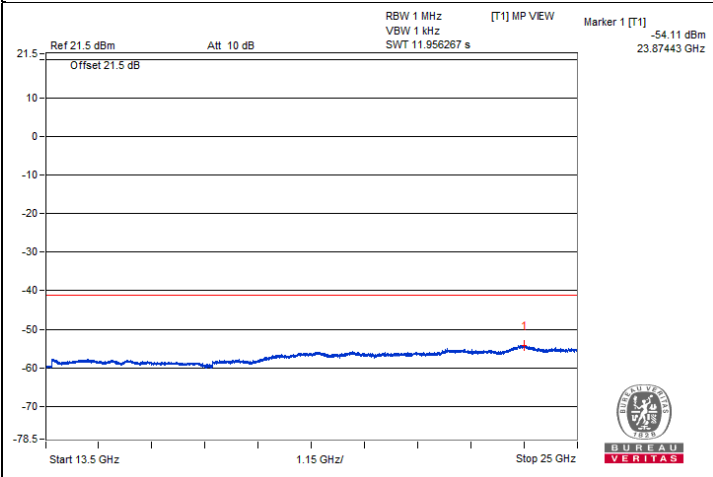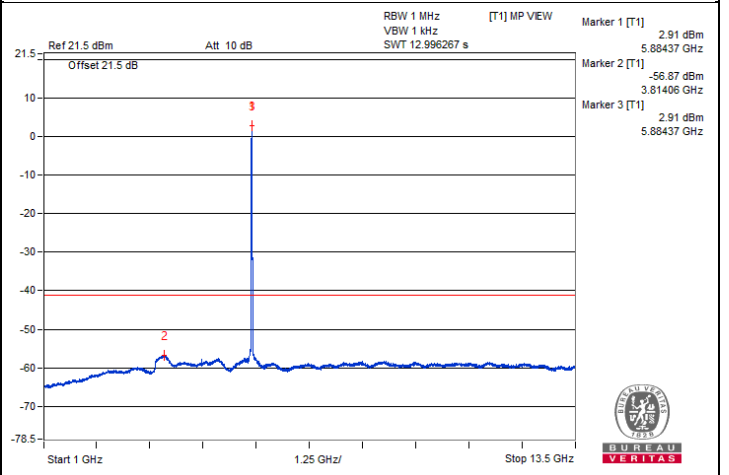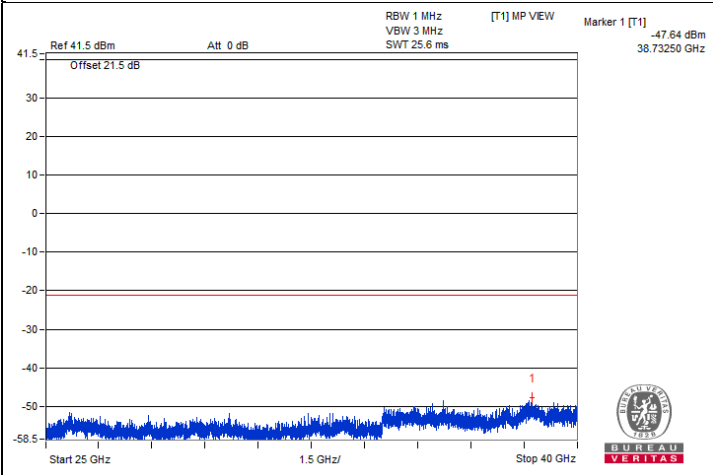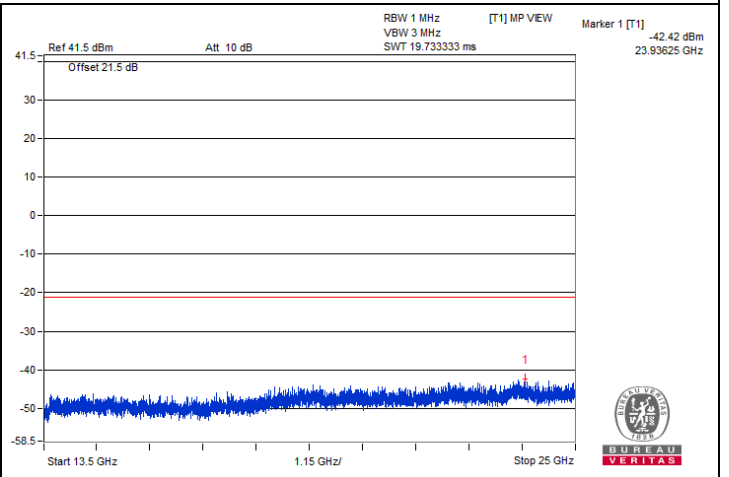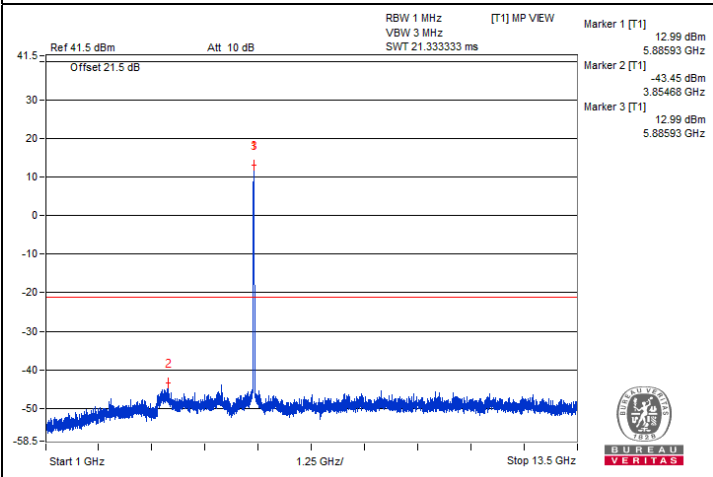





Chain 1

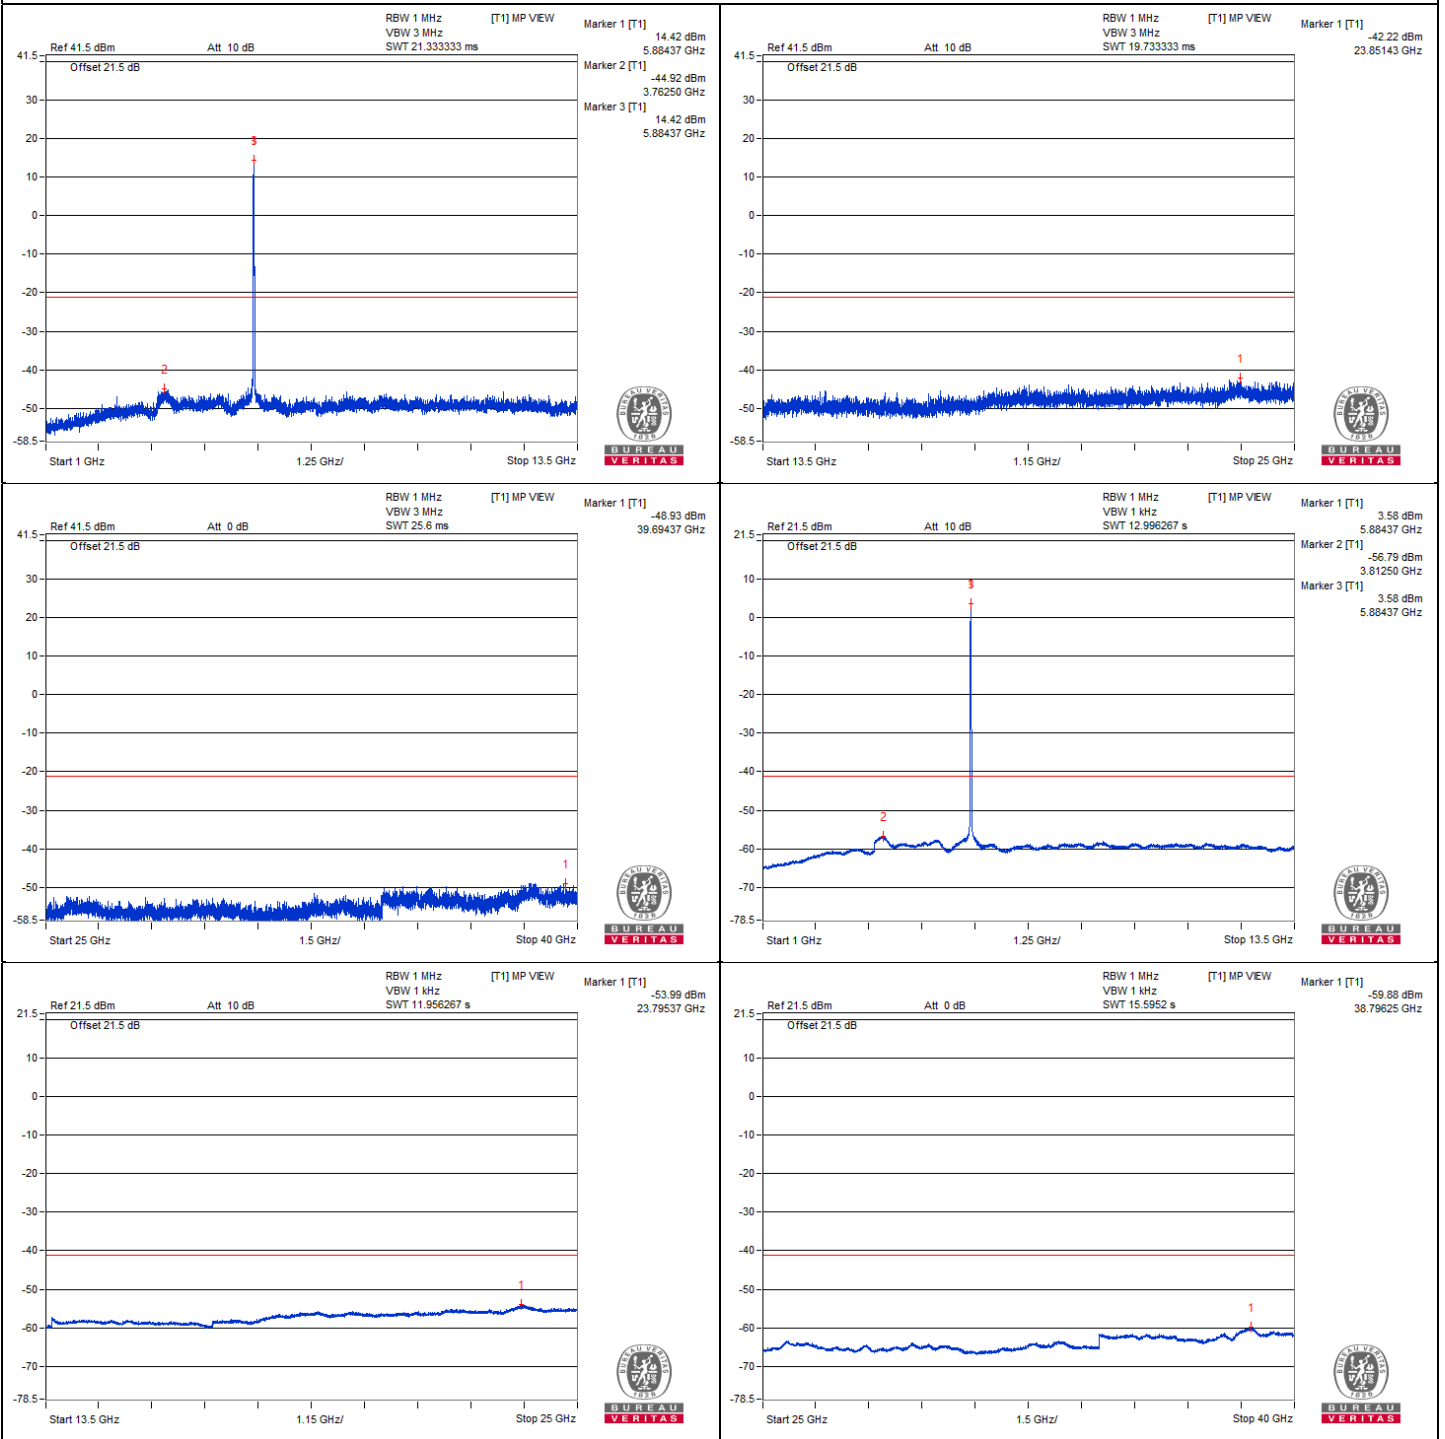





Bandedge table

Chain 0

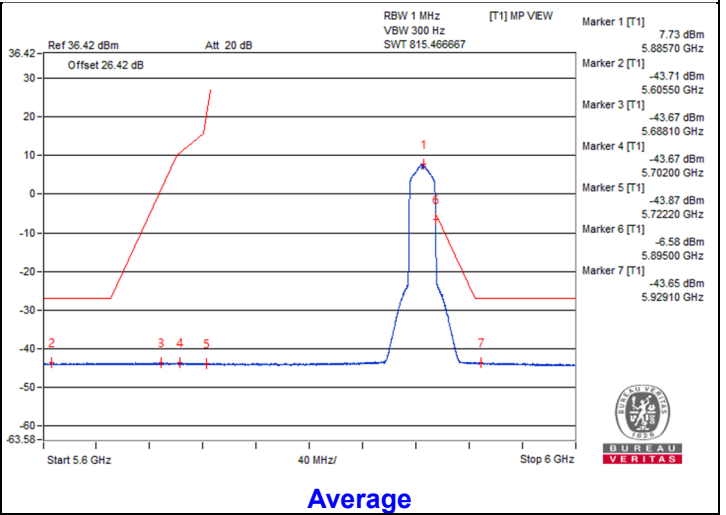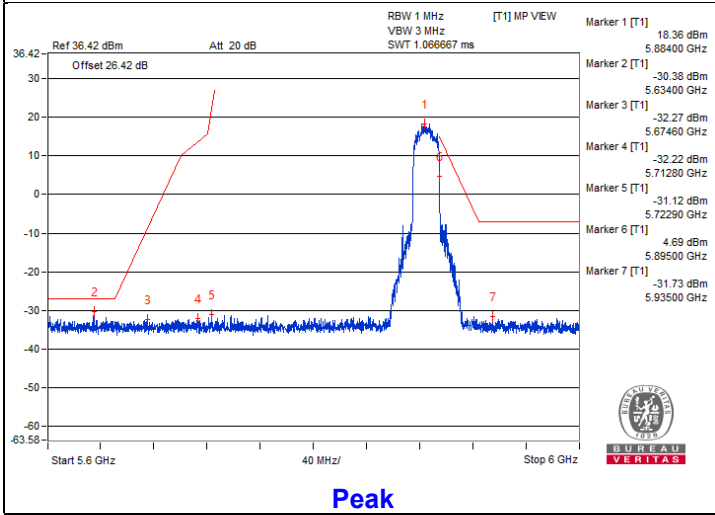

Chain 1

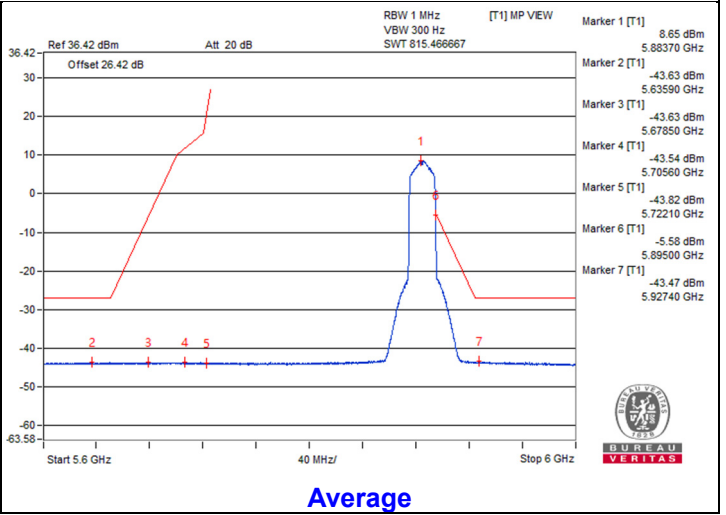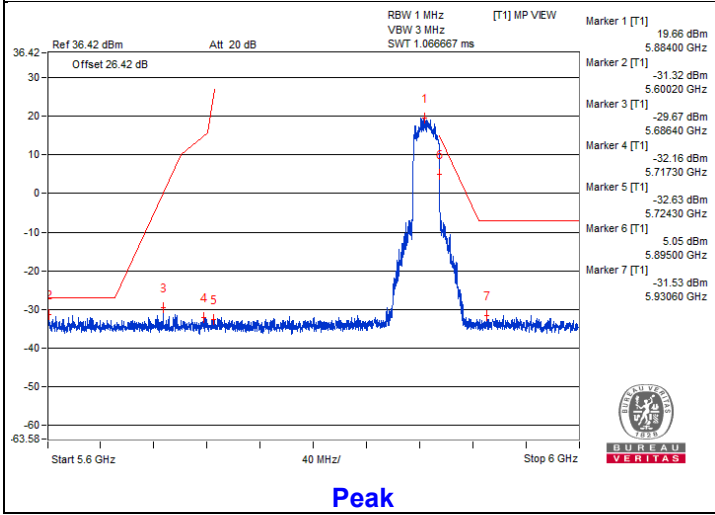

802.11be (EHT40) - Channel 167
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3892.18	66.83 PK	74	-7.17	-36.72	-36.02	4.92	-28.43
2	3881.25	45.78 AV	54	-8.22	-57.16	-57.67	4.92	-49.48
3	#7773.43	65.41 PK	68.2	-2.79	-38.83	-36.94	4.92	-29.85
4	11660.93	65.66 PK	74	-8.34	-38.29	-36.88	4.92	-29.60
5	11657.81	43.93 AV	54	-10.07	-59.11	-59.42	4.92	-51.33
6	#17512.06	55.29 PK	68.2	-12.91	-47.38	-48.5	4.92	-39.97

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

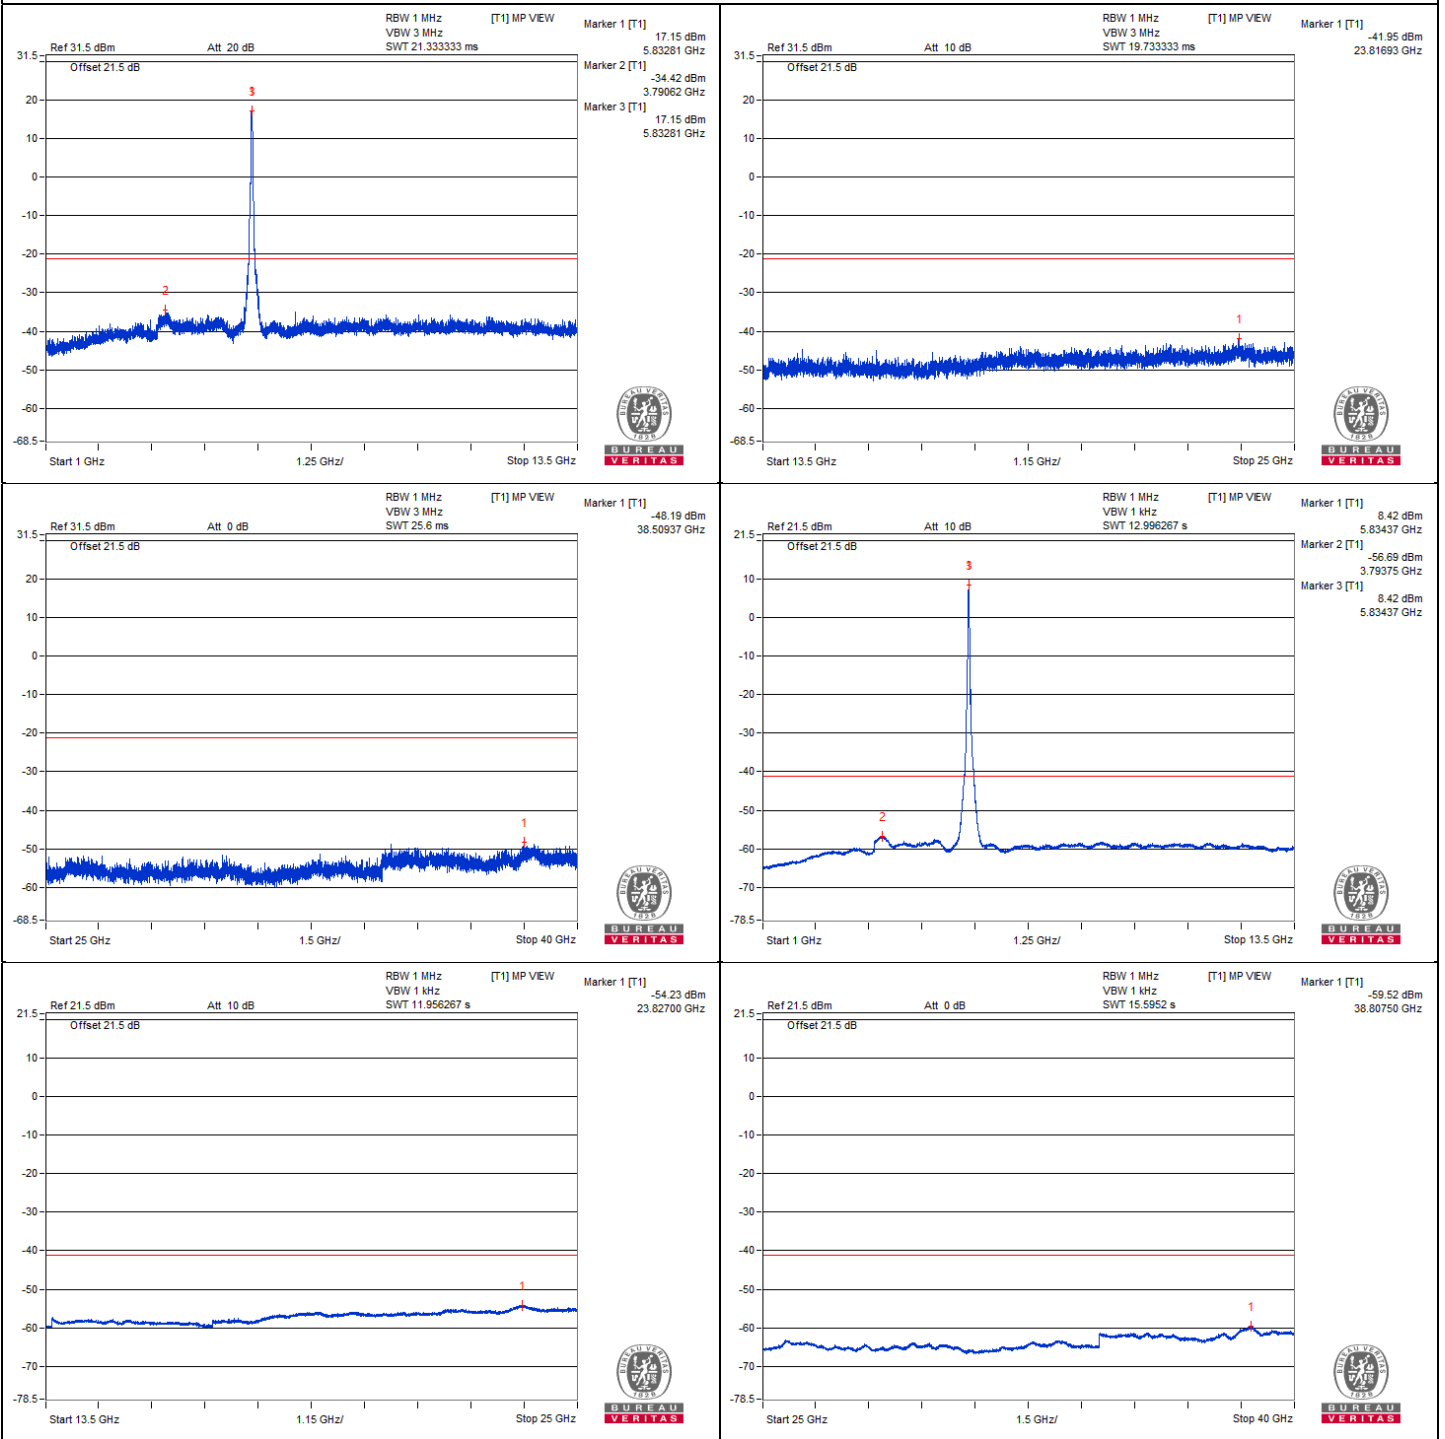





Chain 1

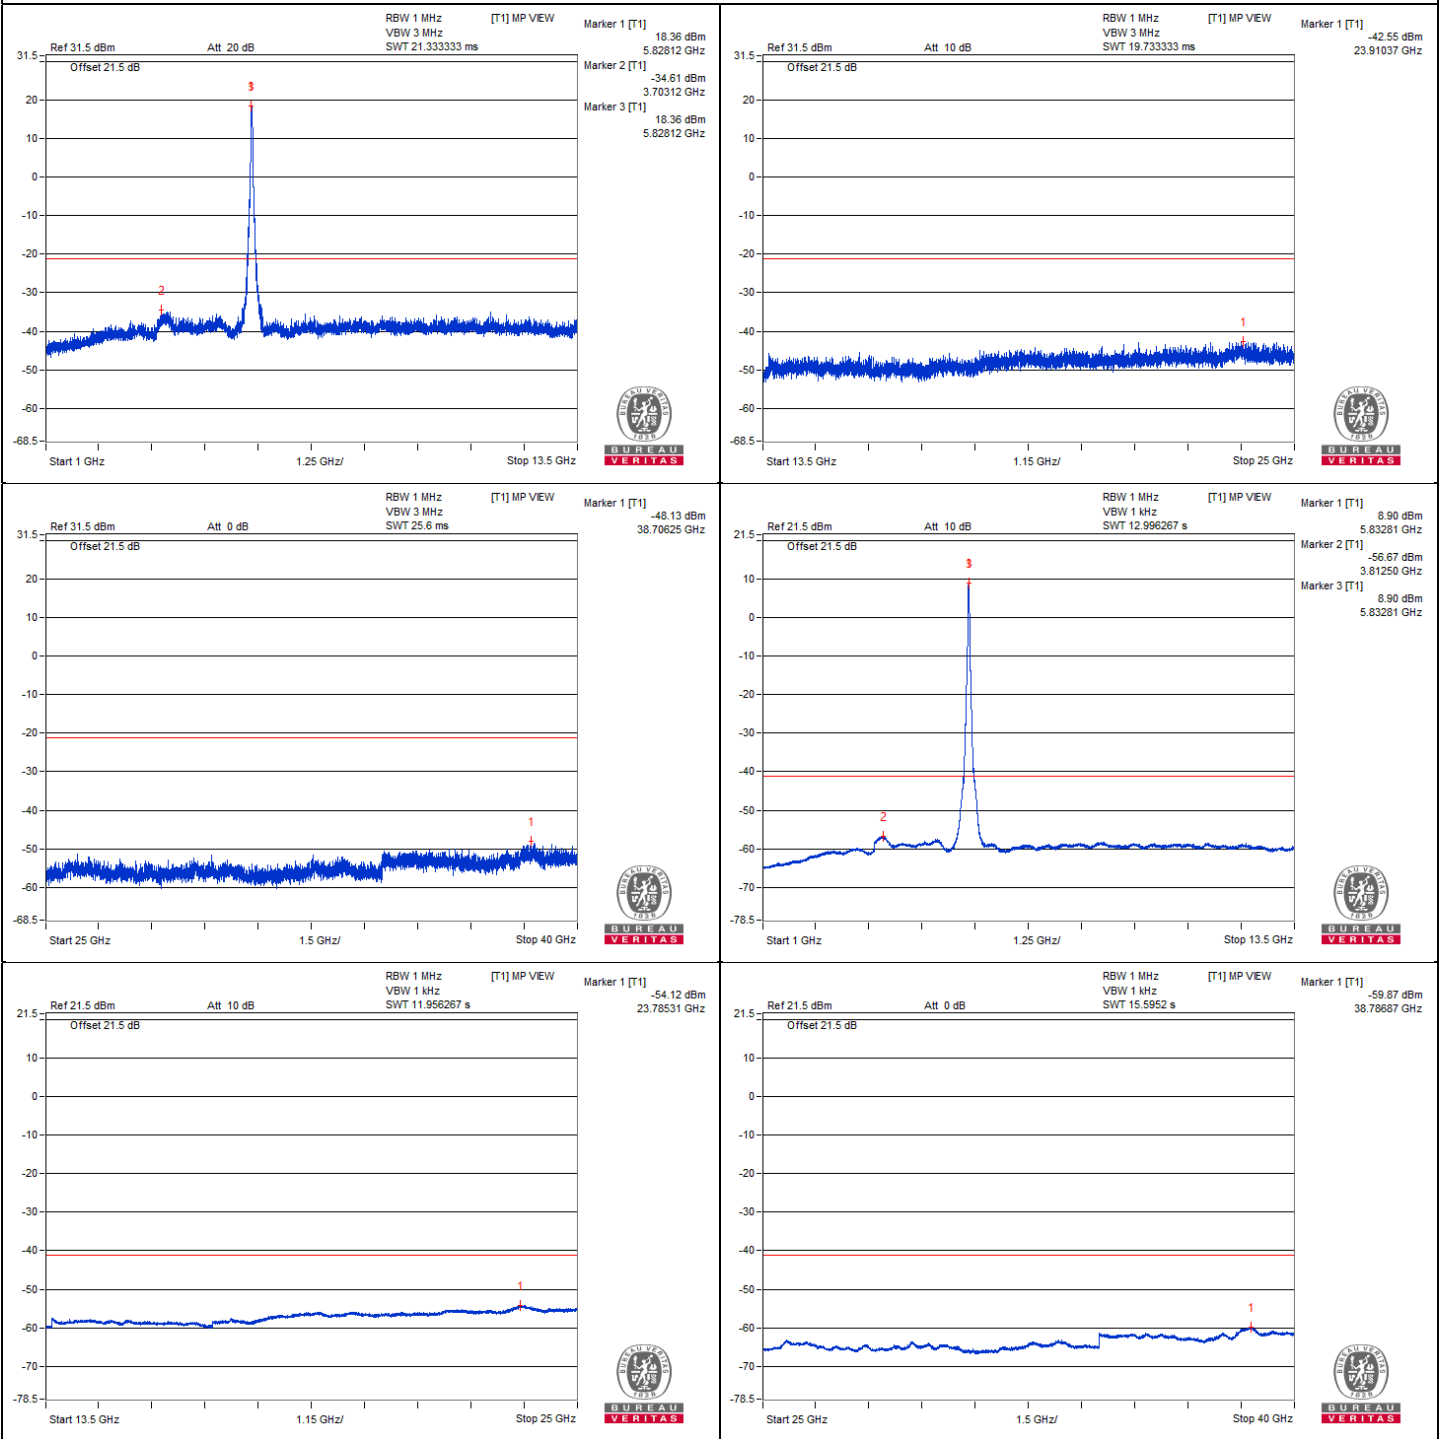





Bandedge table

Chain 0

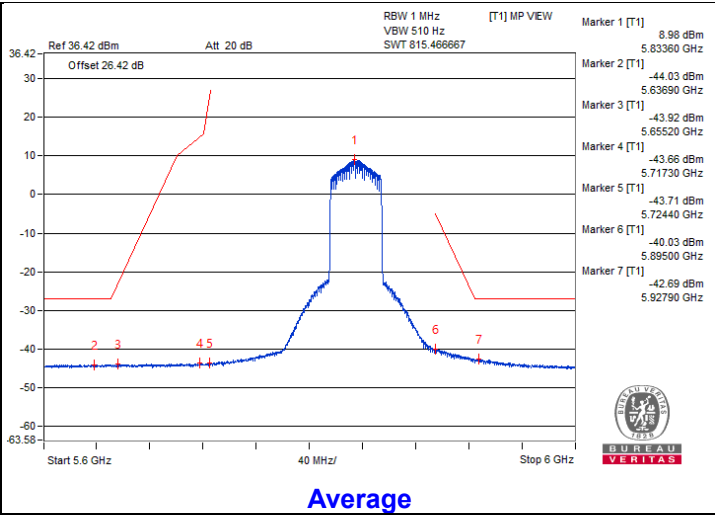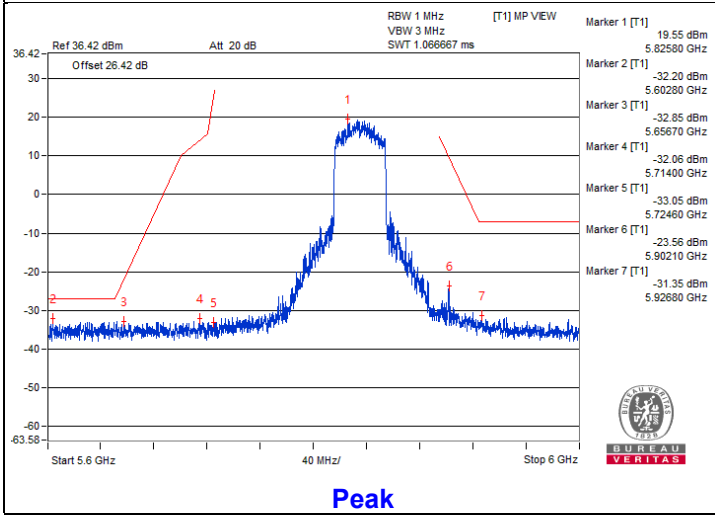

Chain 1

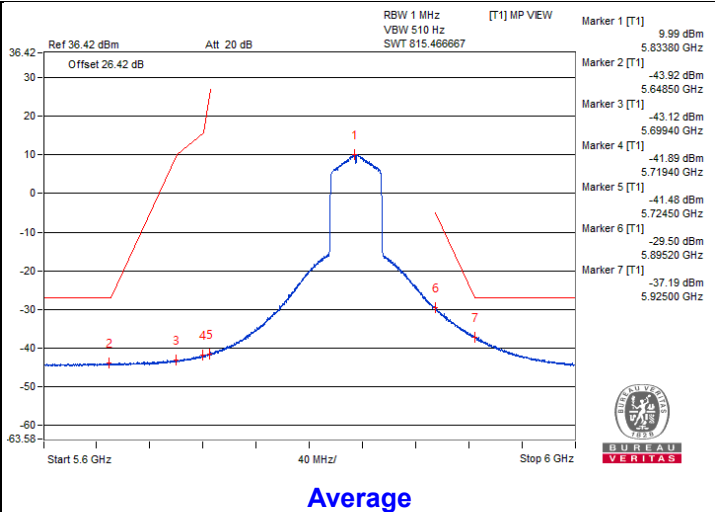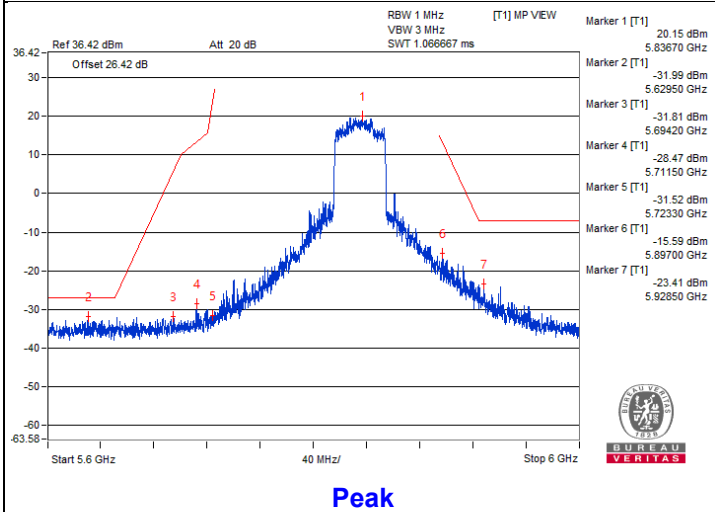

802.11be (EHT40) - Channel 175
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3896.87	66.78 PK	74	-7.22	-35.85	-37.05	4.92	-28.48
2	3896.87	45.6 AV	54	-8.4	-57.54	-57.65	4.92	-49.66
3	#7818.75	64.54 PK	68.2	-3.66	-40	-37.63	4.92	-30.72
4	11754.68	65.72 PK	74	-8.28	-38.33	-36.75	4.92	-29.54
5	11740.62	43.92 AV	54	-10.08	-59.34	-59.21	4.92	-51.34
6	#17617	55.38 PK	68.2	-12.82	-48.93	-46.92	4.92	-39.88

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

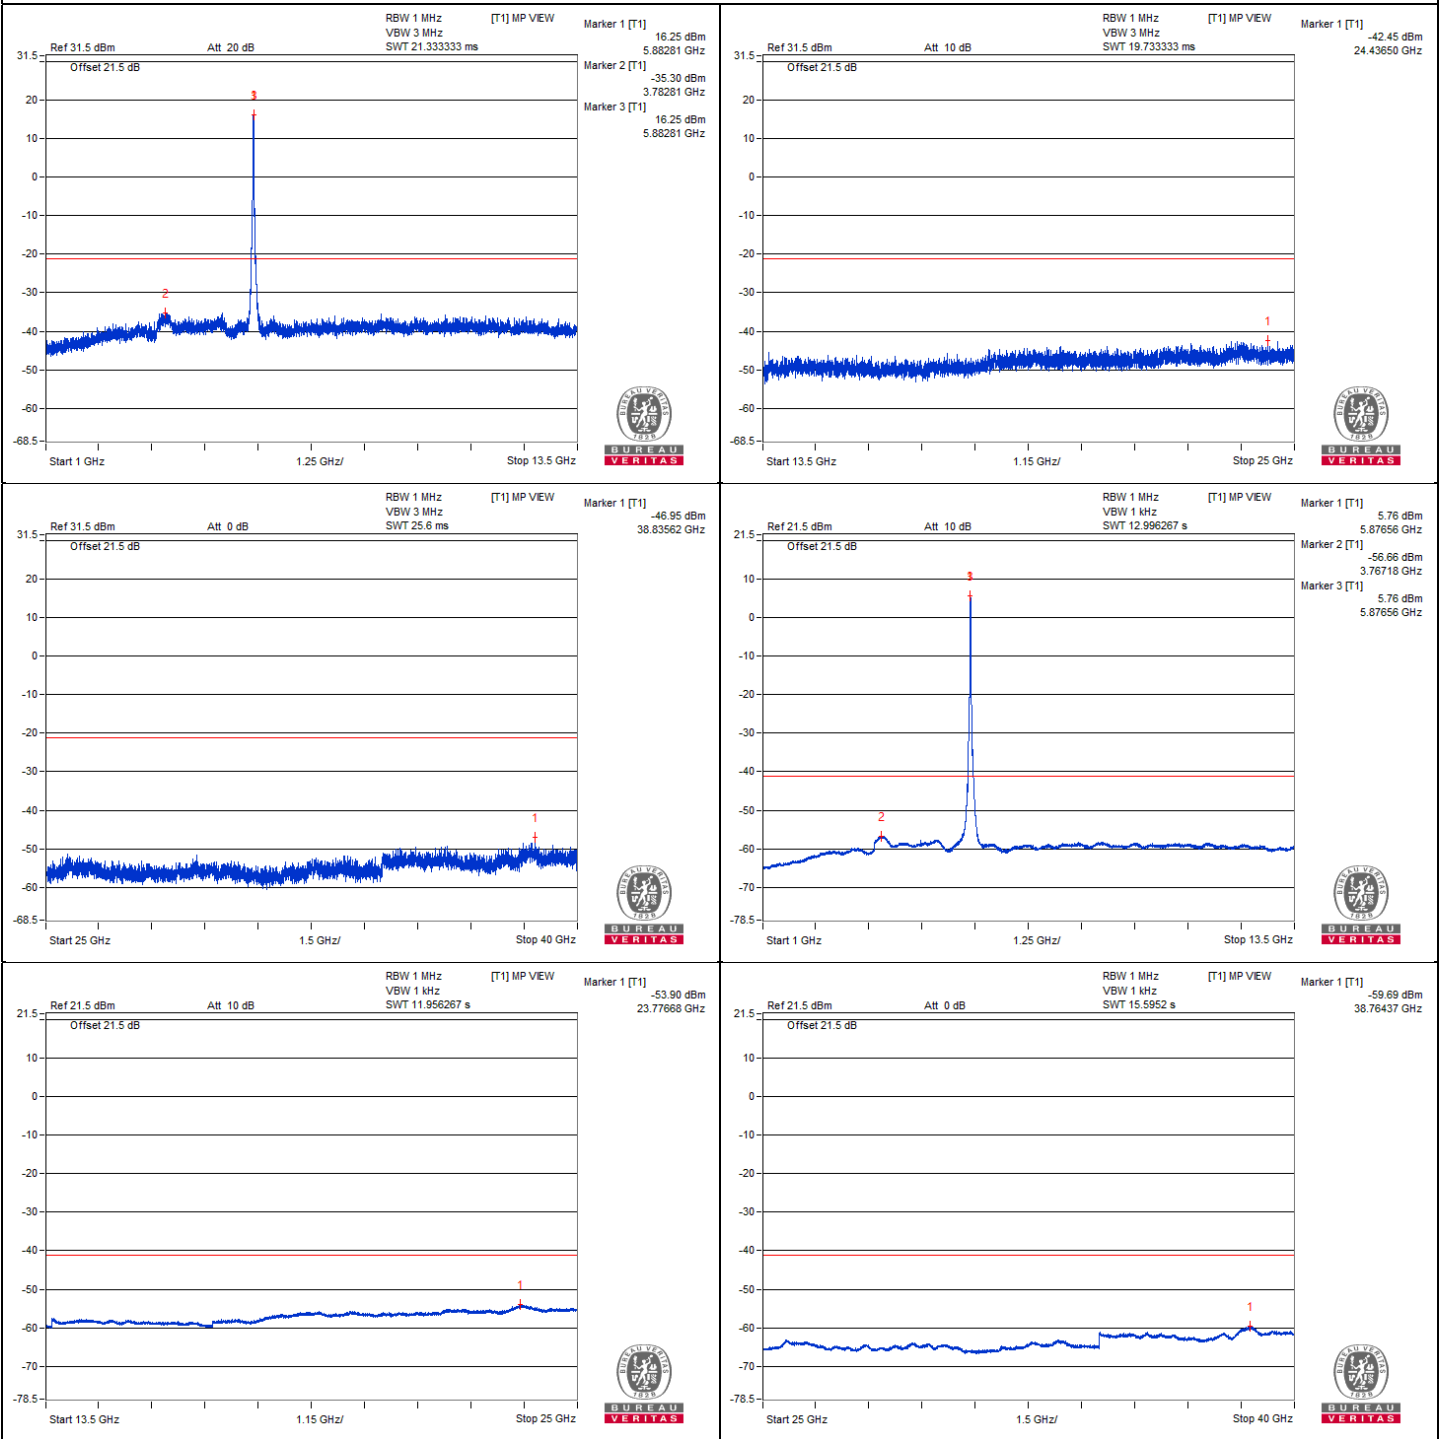




Chain 1

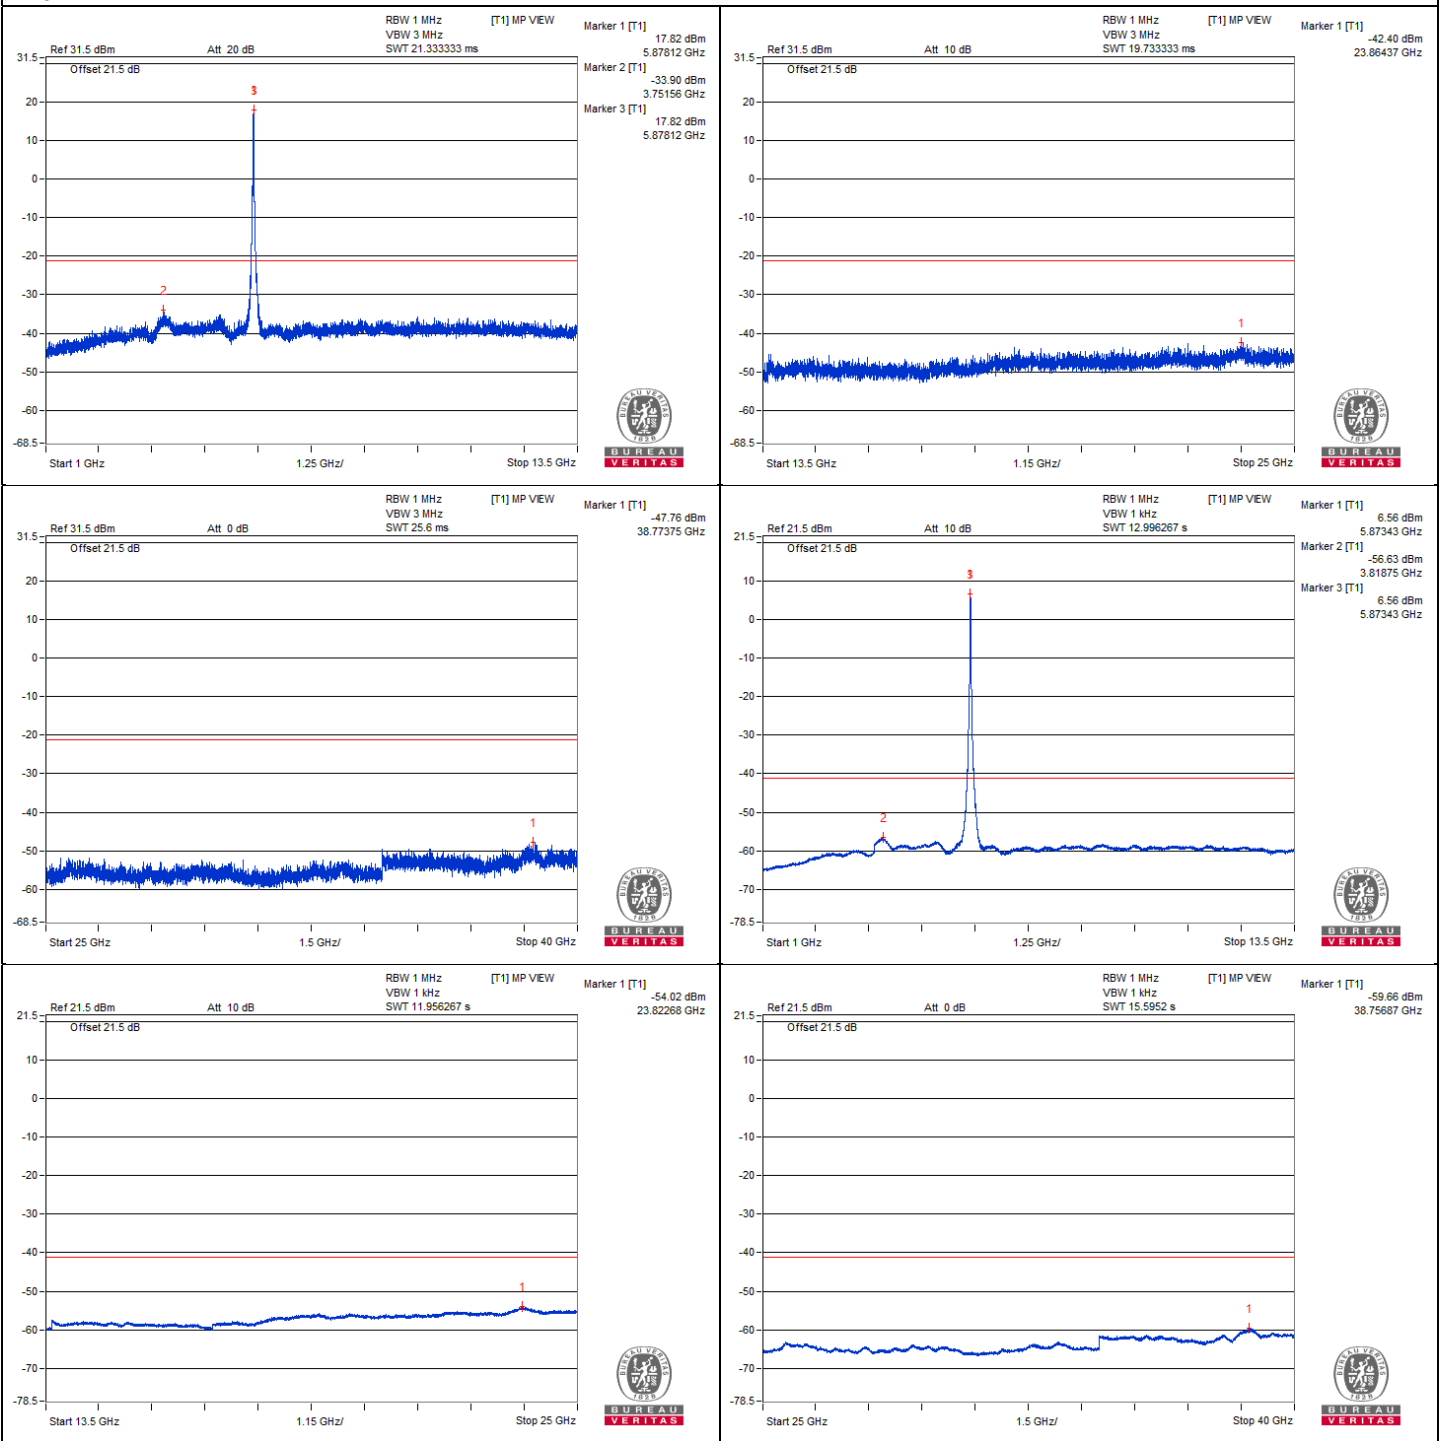




Bandedge table

Chain 0

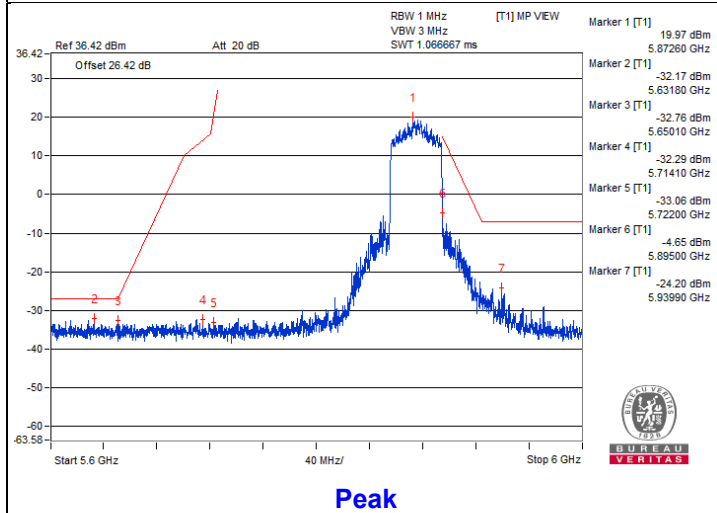


Peak

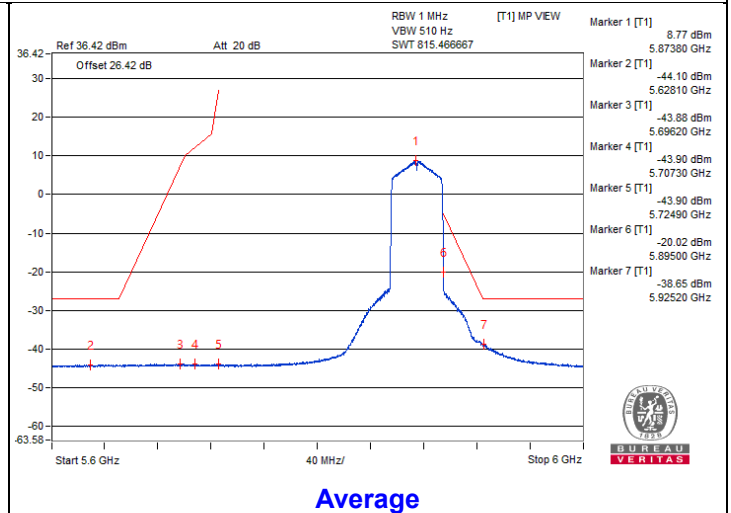


Average

Chain 1

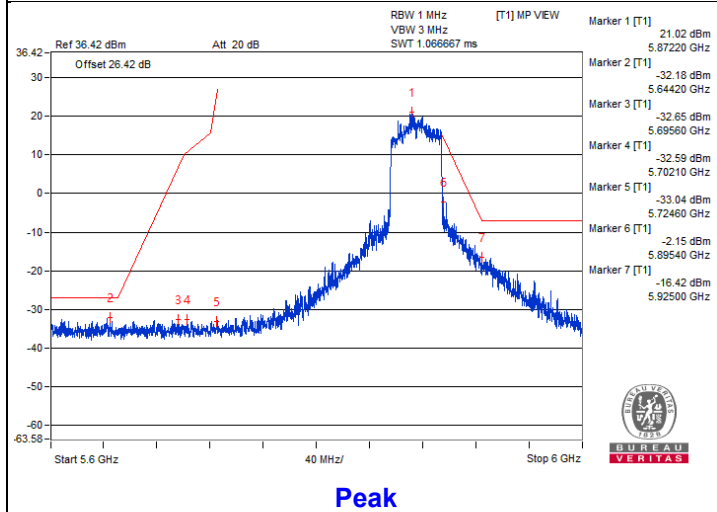

Peak

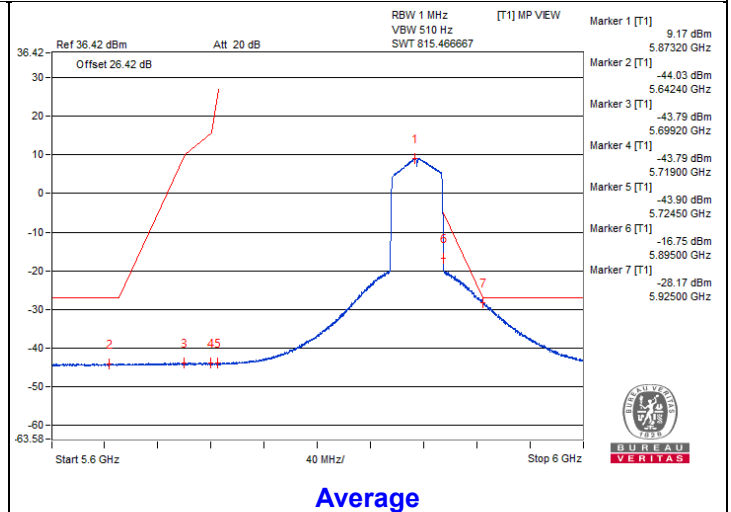

Average

802.11be (EHT80) - Channel 171

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3884.37	66.8 PK	74	-7.2	-36.75	-36.05	4.92	-28.46
2	3887.5	45.73 AV	54	-8.27	-57.68	-57.25	4.92	-49.53
3	#7823.43	64.76 PK	68.2	-3.44	-39.64	-37.49	4.92	-30.50
4	11728.12	65.29 PK	74	-8.71	-37.12	-38.84	4.92	-29.97
5	11723.12	43.84 AV	54	-10.16	-59.65	-59.07	4.92	-51.42
6	#17559.5	55.38 PK	68.2	-12.82	-47.05	-48.74	4.92	-39.88

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.









Chain 0

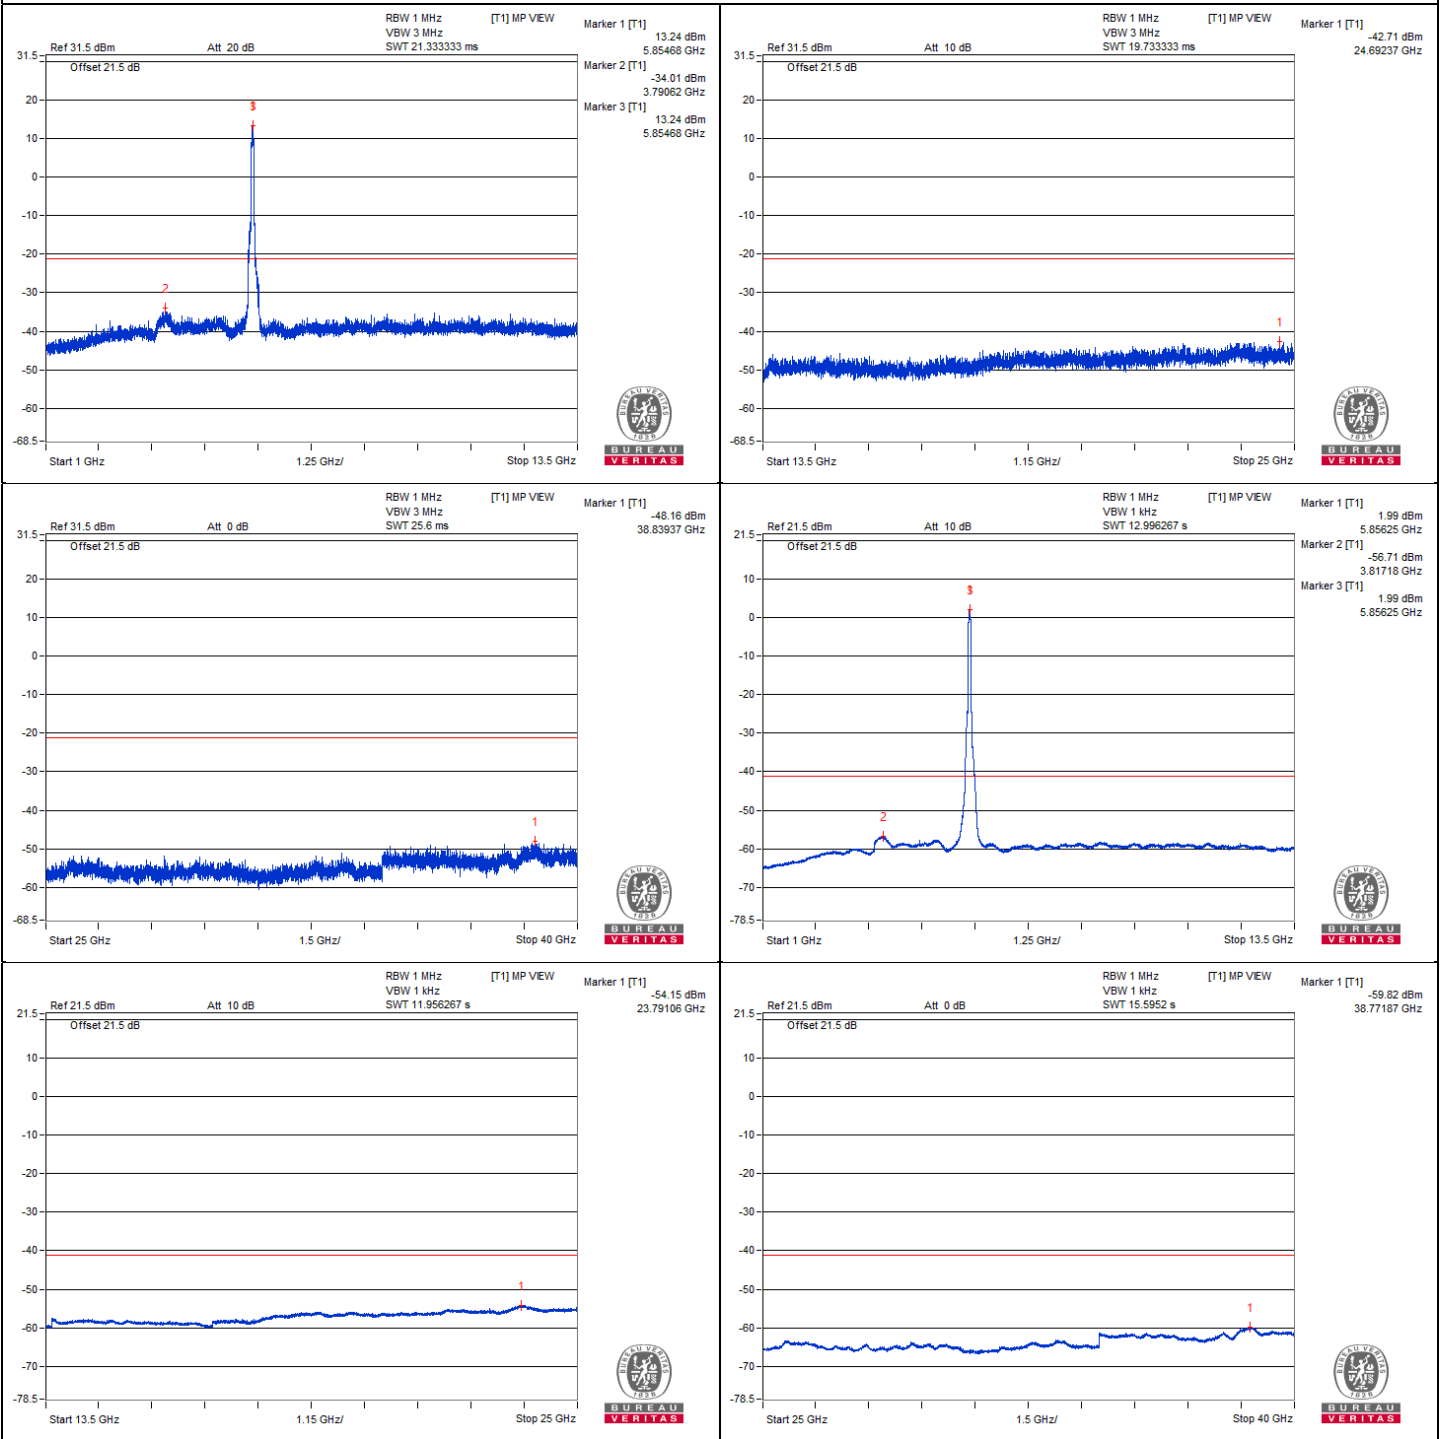





Chain 1

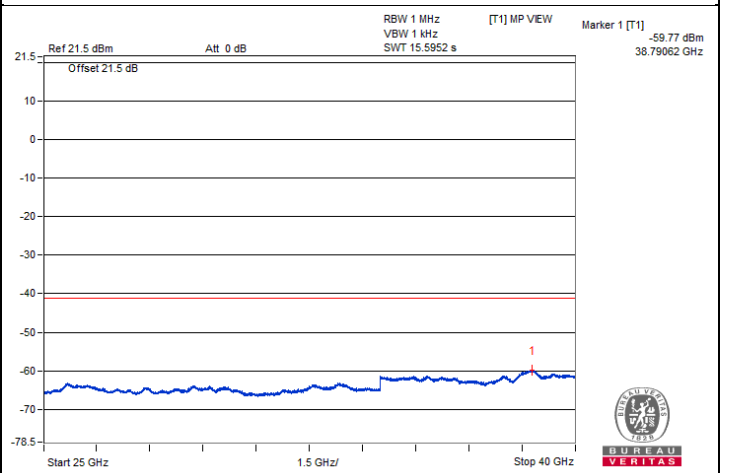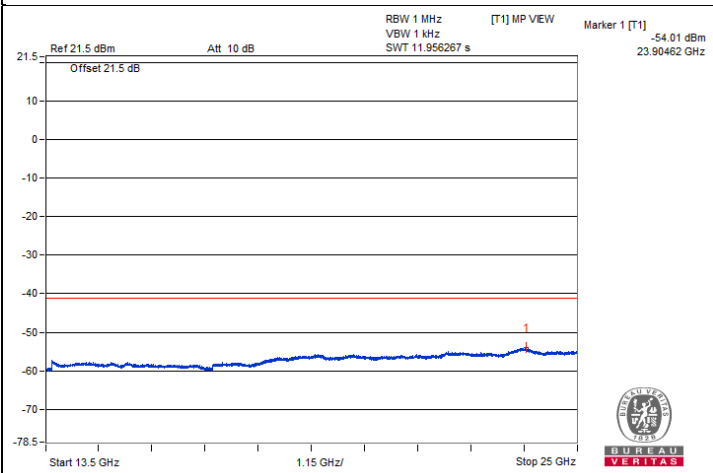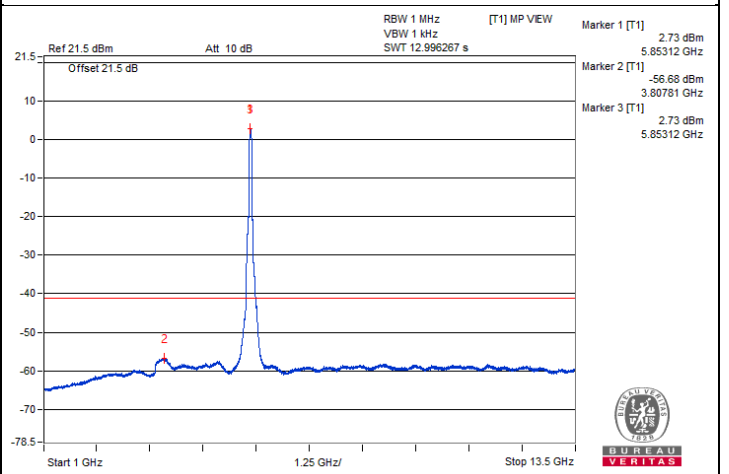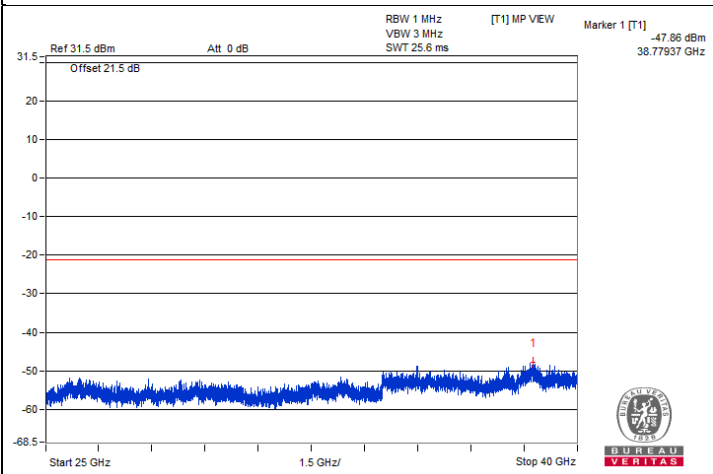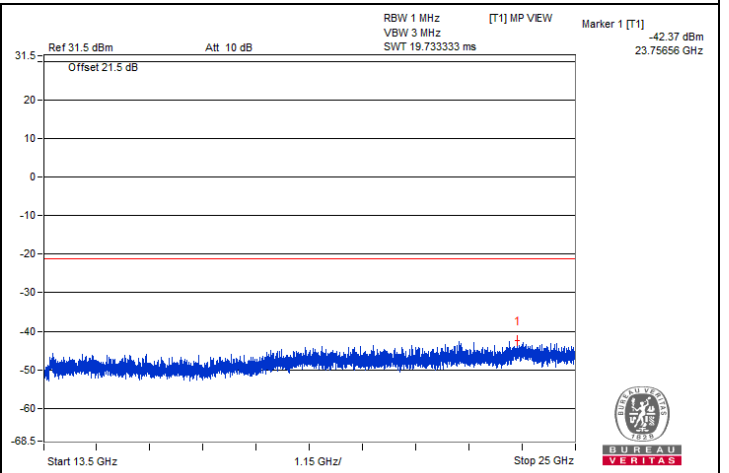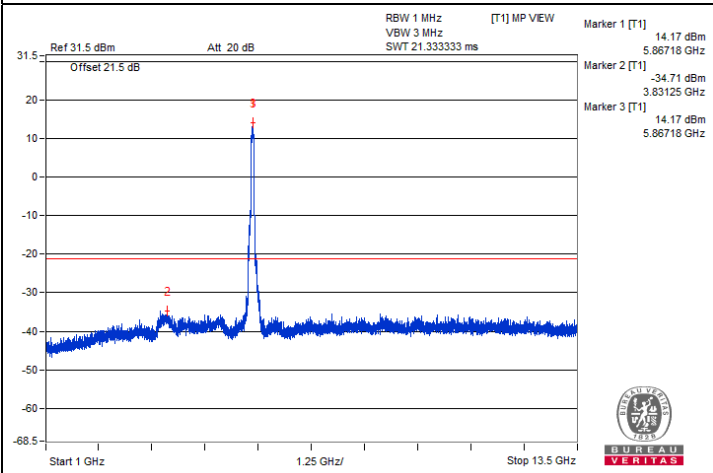





Bandedge table

Chain 0

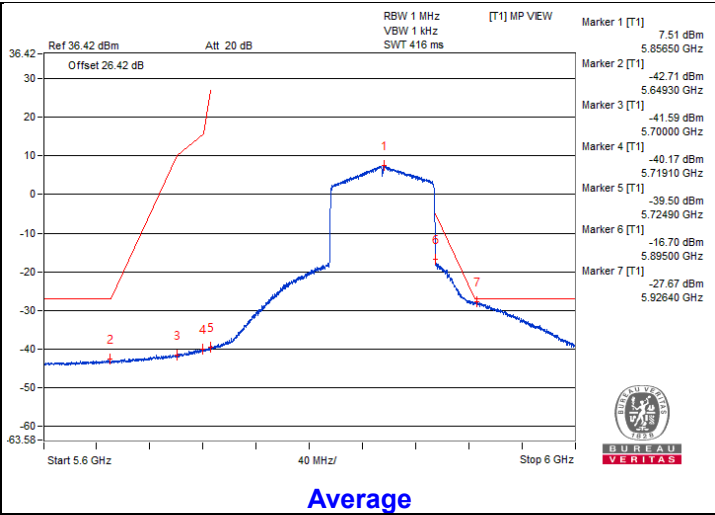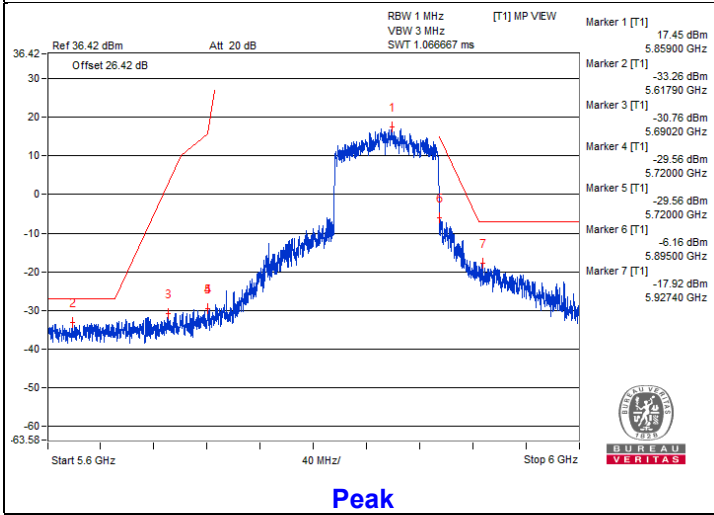

Chain 1

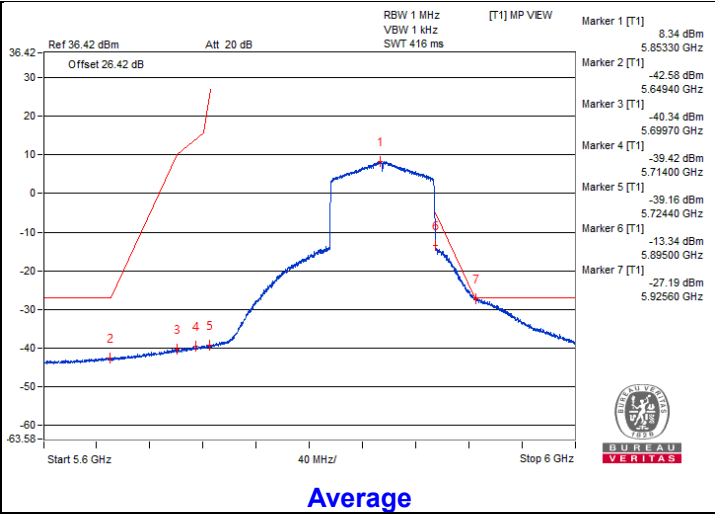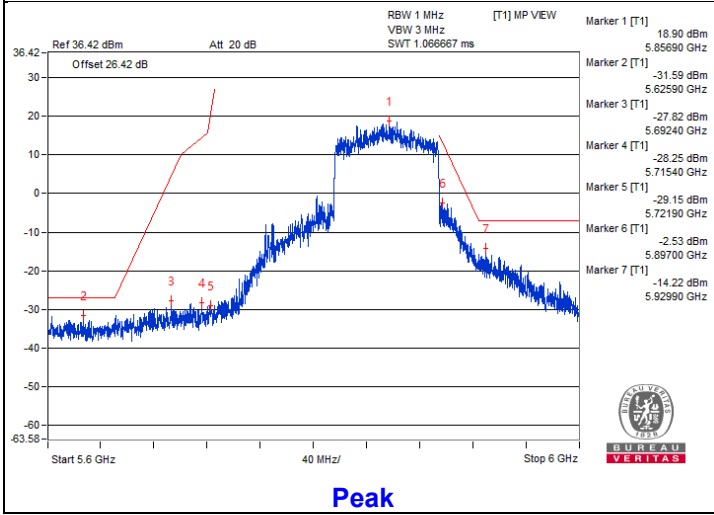

802.11be (EHT160) - Channel 163

Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3878.12	67.03 PK	74	-6.97	-37.19	-35.33	4.92	-28.23
2	3869.37	46.15 AV	54	-7.85	-56.78	-57.31	4.92	-49.11
3	7737.5	65.06 PK	74	-8.94	-38.79	-37.56	4.92	-30.20
4	7735.93	44.15 AV	54	-9.85	-58.79	-59.31	4.92	-51.11
5	11617.18	65.83 PK	74	-8.17	-38.36	-36.54	4.92	-29.43
6	11629.68	44.34 AV	54	-9.66	-58.65	-59.07	4.92	-50.92
7	#17434.43	54.79 PK	68.2	-13.41	-47.87	-49.01	4.92	-40.47

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

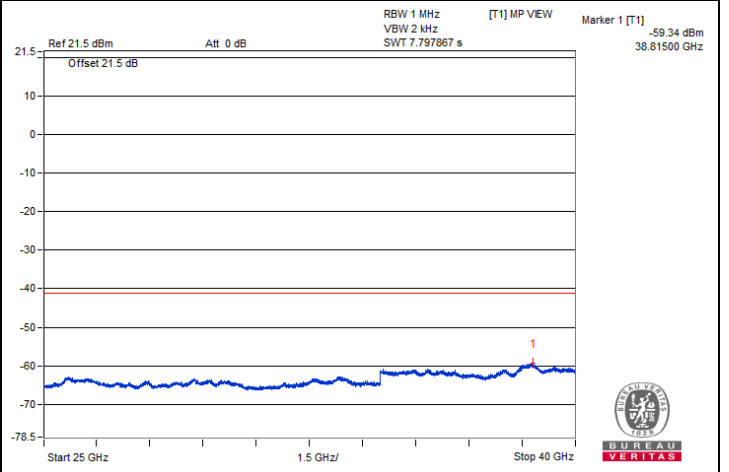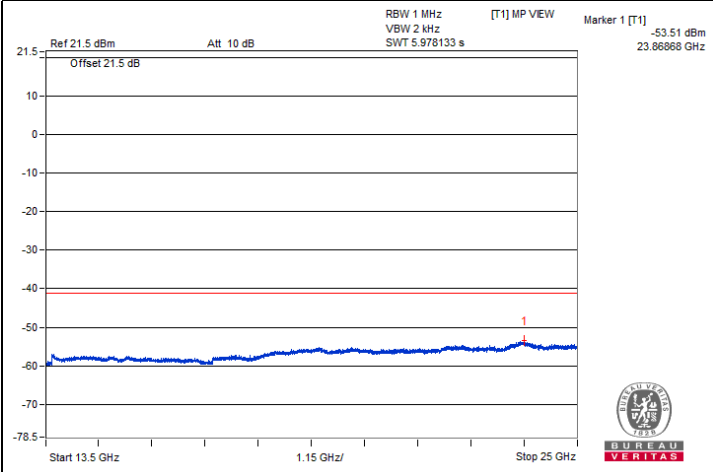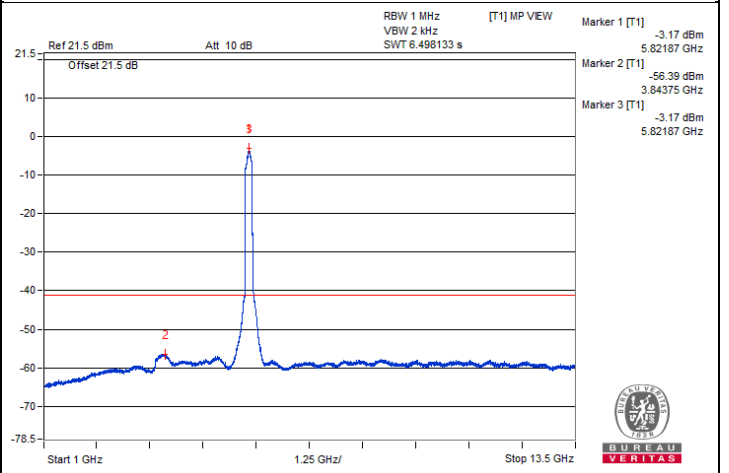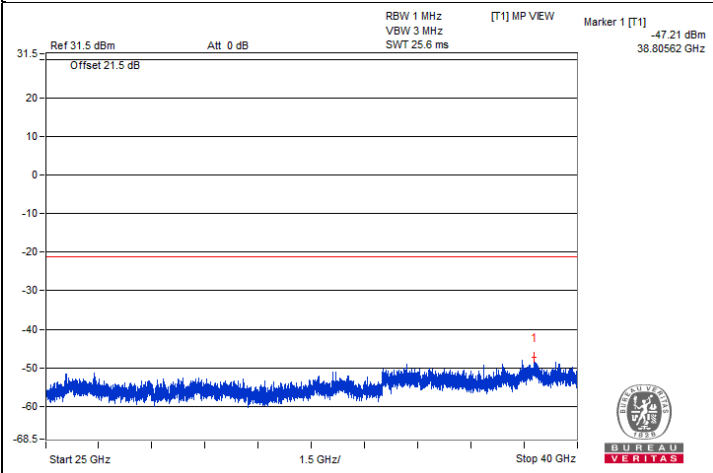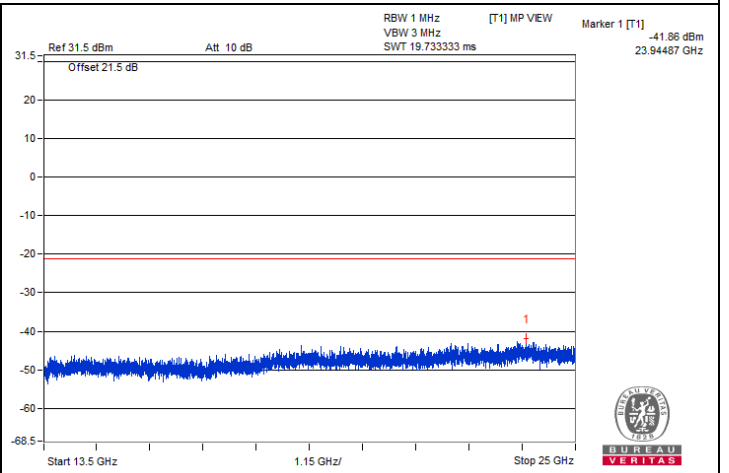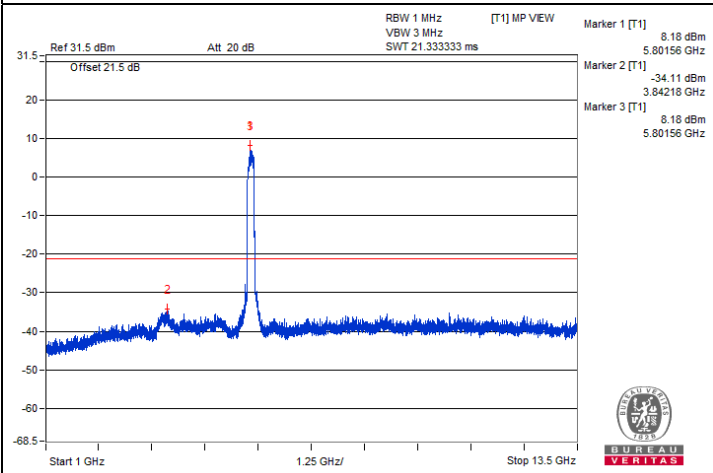




Chain 1

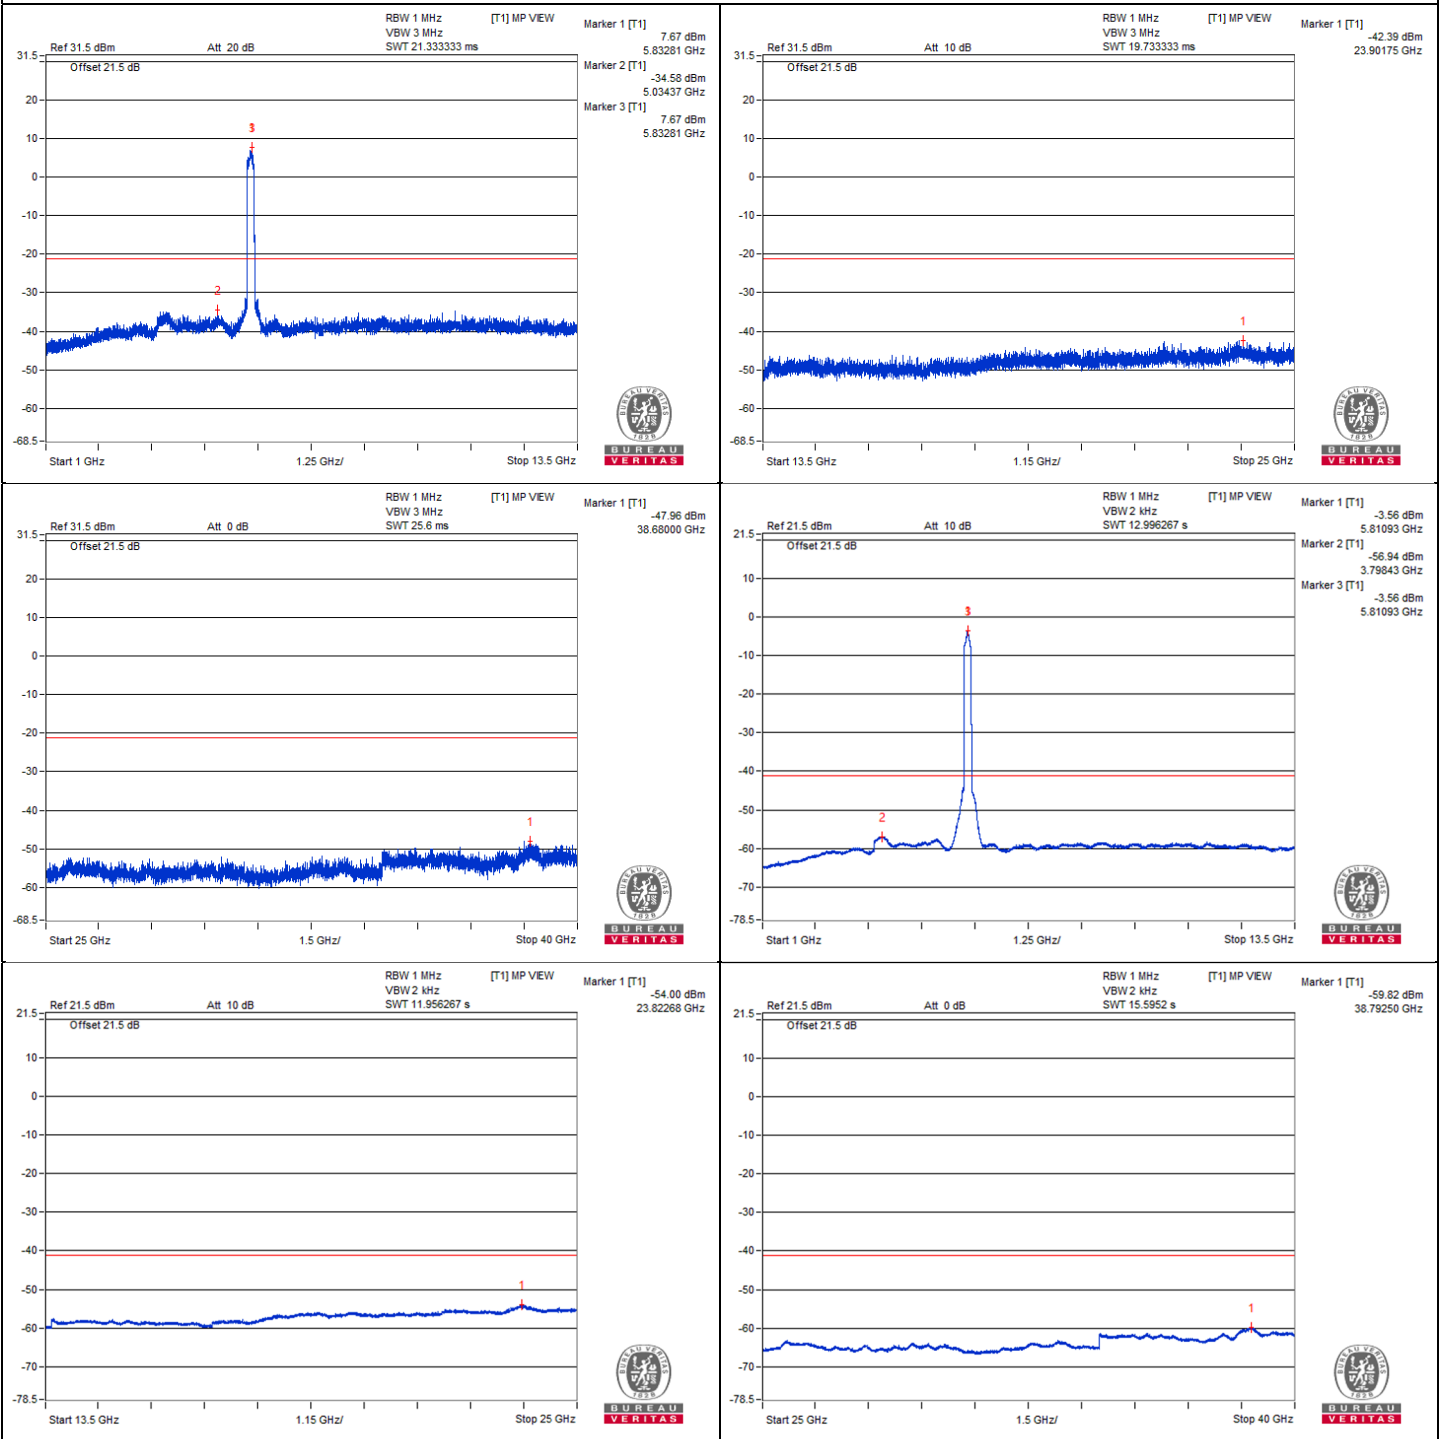




Bandedge table

Chain 0

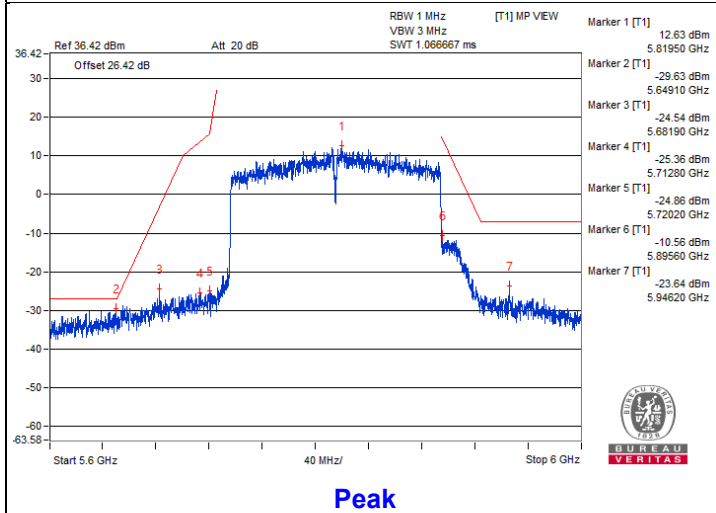


Peak

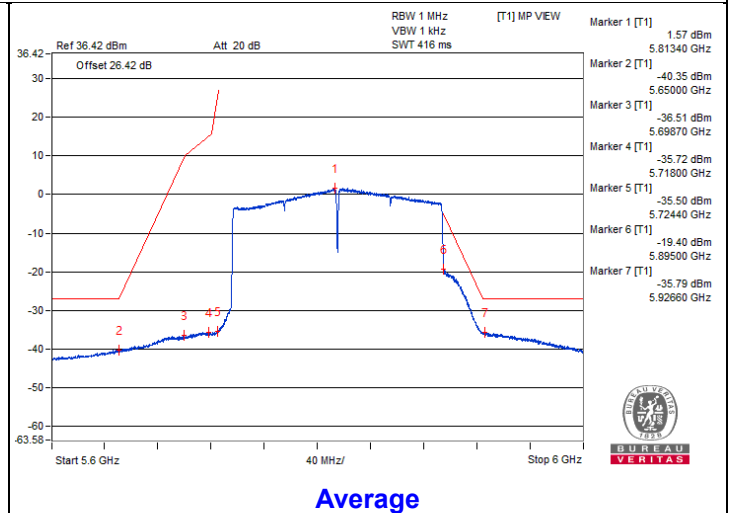


Average

Chain 1

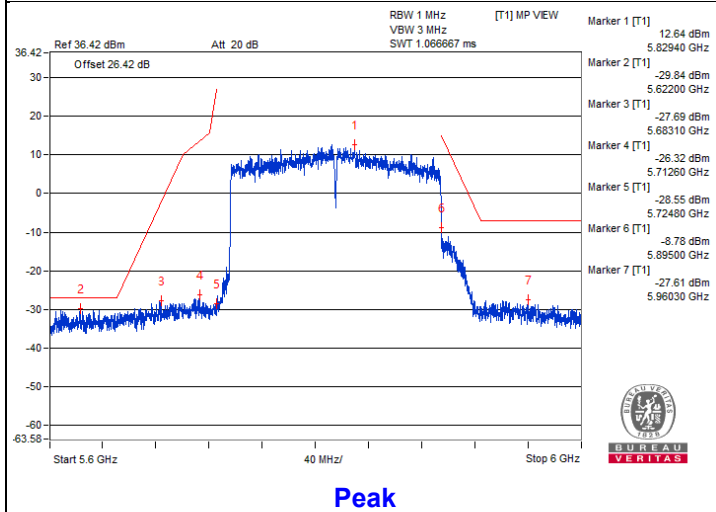

Peak

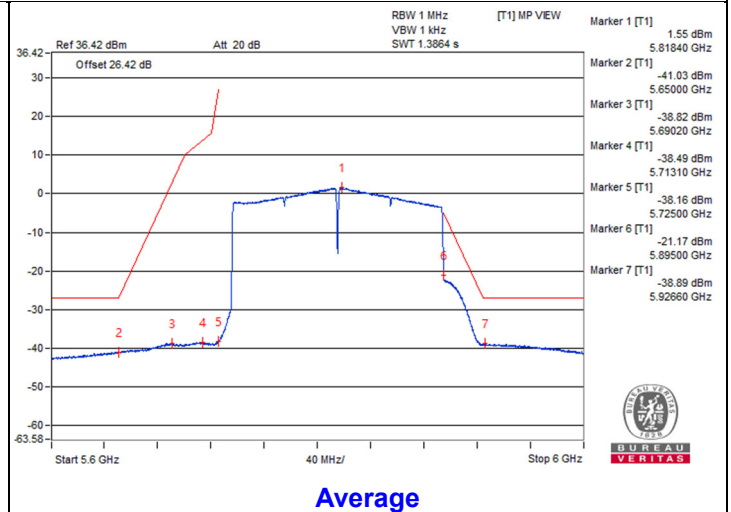

Average

802.11be (EHT20) 26-tone RU - Channel 169

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3881.25	57.09 PK	74	-16.91	-46.09	-46.11	4.92	-38.17
2	3887.5	46.04 AV	54	-7.96	-57.04	-57.26	4.92	-49.22
3	#7790.62	54.59 PK	68.2	-13.61	-48.34	-48.87	4.92	-40.67
4	11709.37	55.01 PK	74	-18.99	-48.11	-48.25	4.92	-40.25
5	11701.62	44.31 AV	54	-9.69	-58.82	-58.95	4.92	-50.95
6	#17542.25	55.1 PK	68.2	-13.1	-47.87	-48.33	4.92	-40.16

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

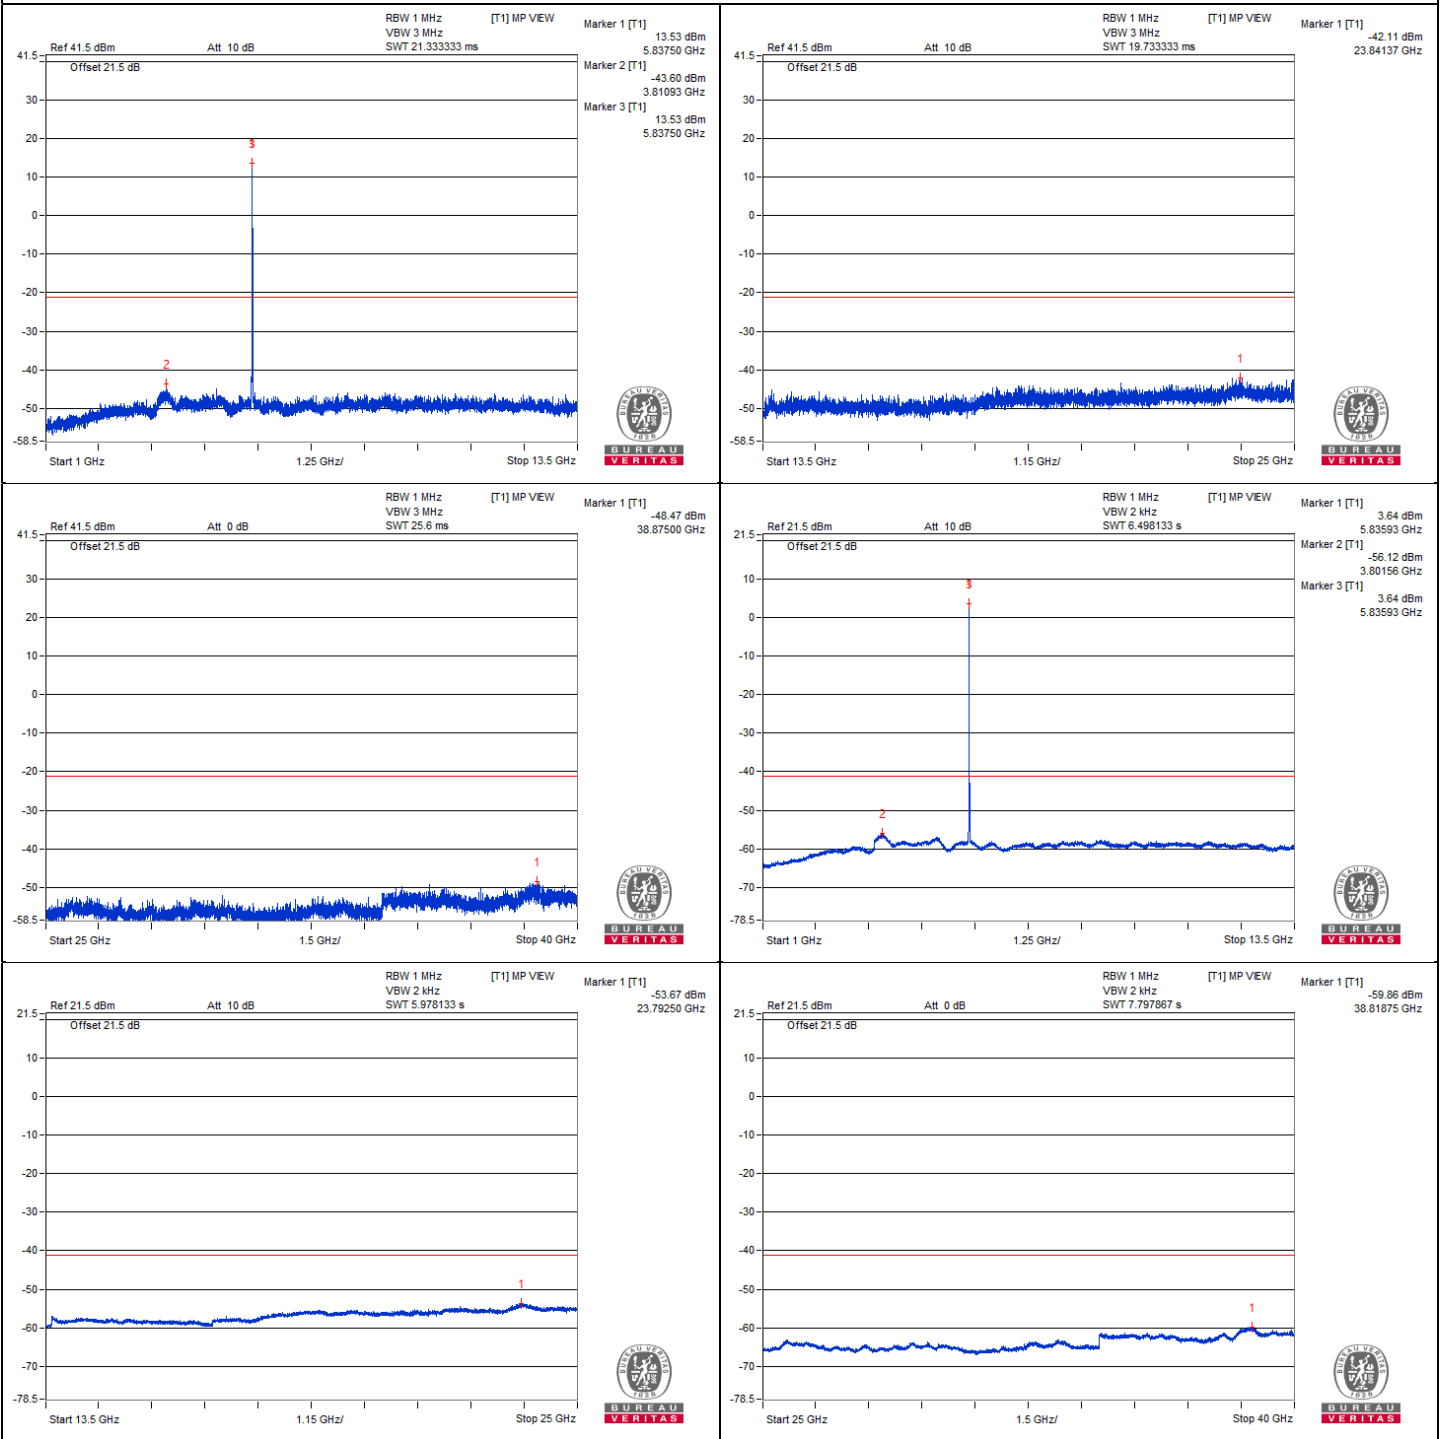





Chain 1

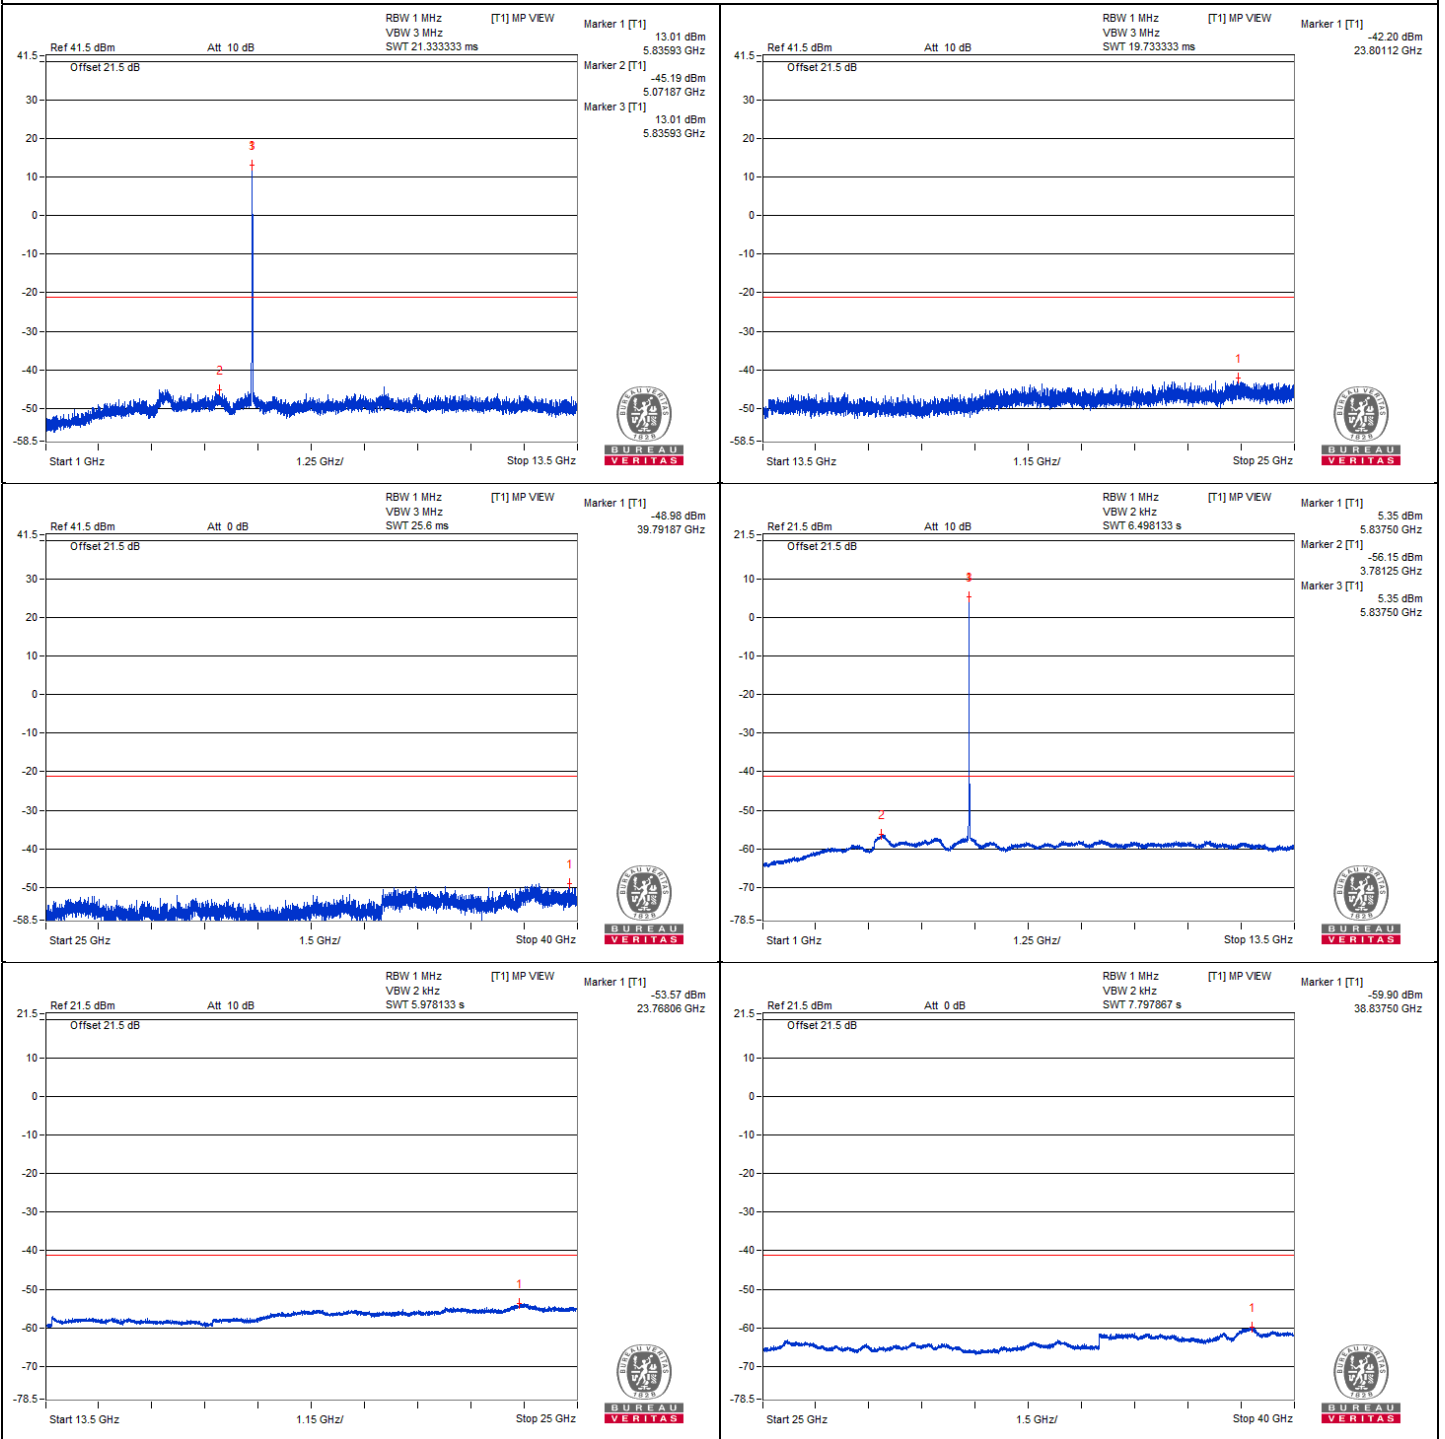





Bandedge table

Chain 0

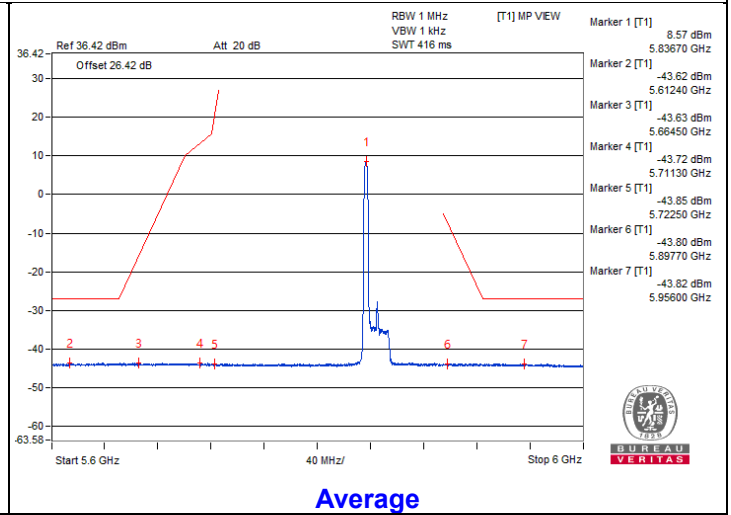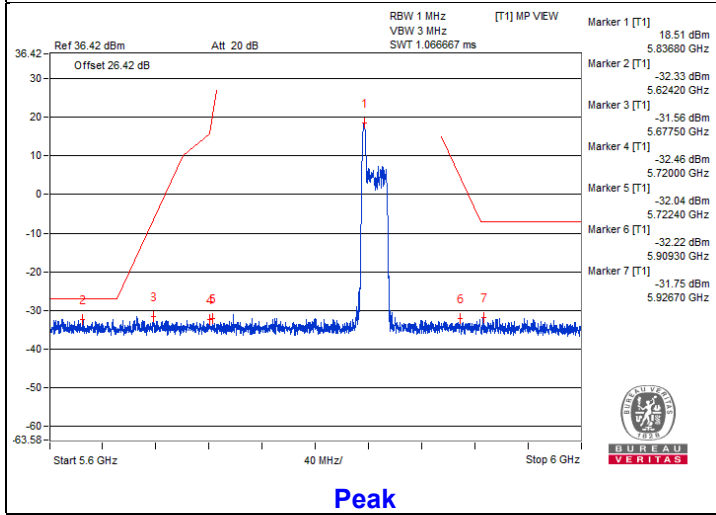

Chain 1

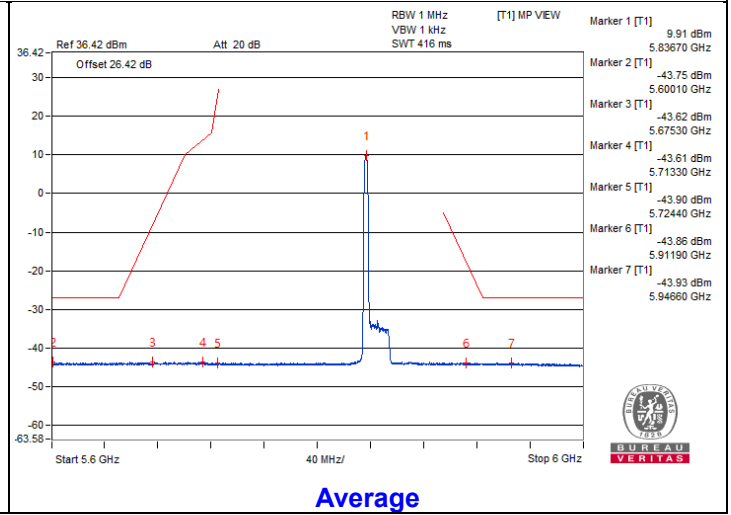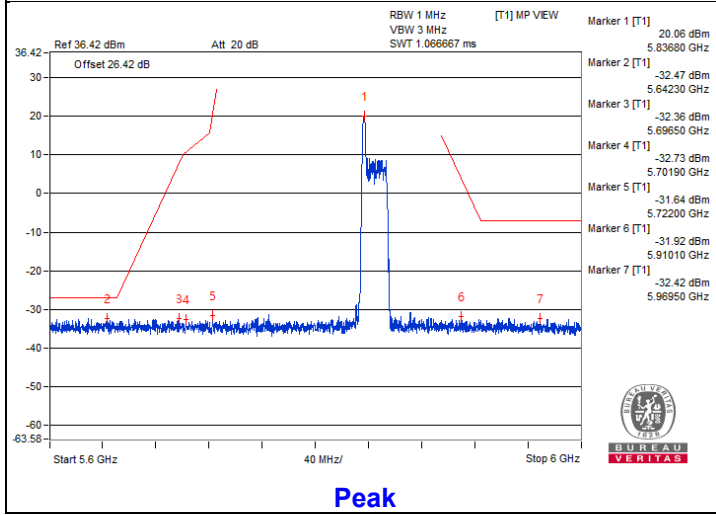

802.11be (EHT20) 26-tone RU - Channel 173
Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3892.18	56.82 PK	74	-17.18	-46.66	-46.1	4.92	-38.44
2	3890.62	45.89 AV	54	-8.11	-57.07	-57.54	4.92	-49.37
3	#7809.37	54.85 PK	68.2	-13.35	-49.69	-47.31	4.92	-40.41
4	11726.56	55.52 PK	74	-18.48	-47.61	-47.74	4.92	-39.74
5	11714.06	44.12 AV	54	-9.88	-58.91	-59.24	4.92	-51.14
6	#17591.12	56.36 PK	68.2	-11.84	-47.38	-46.35	4.92	-38.90

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

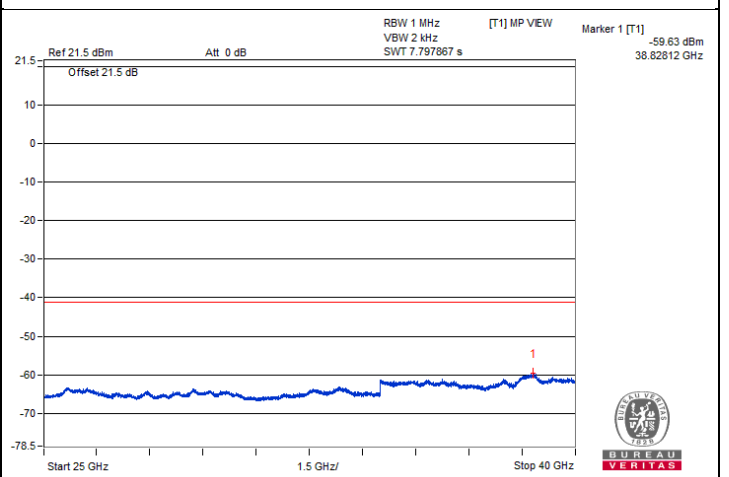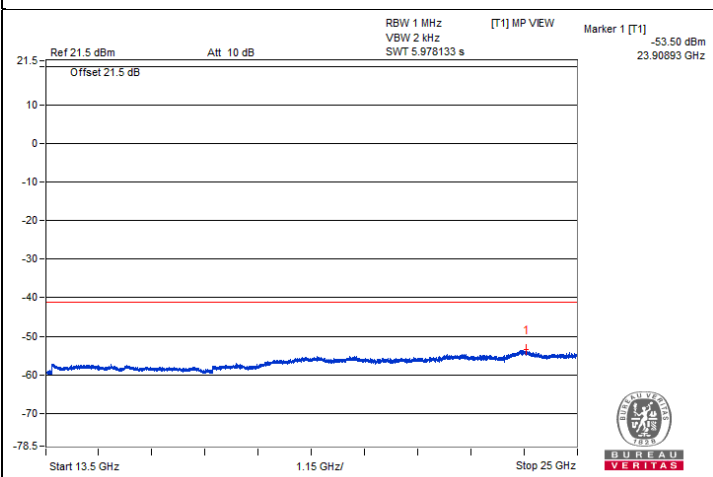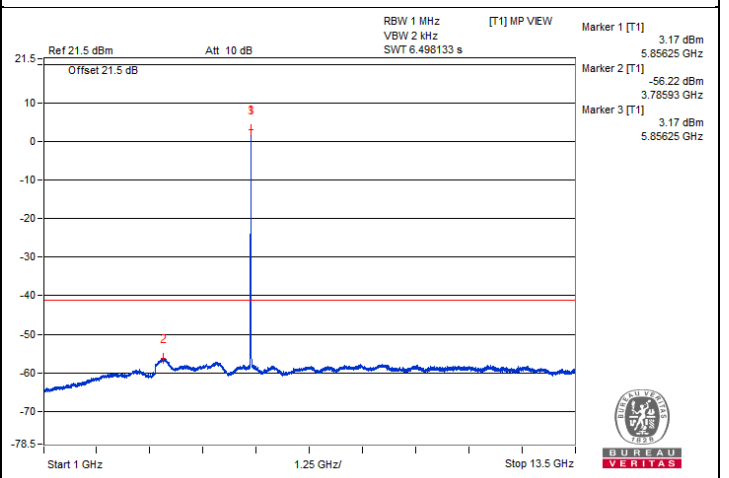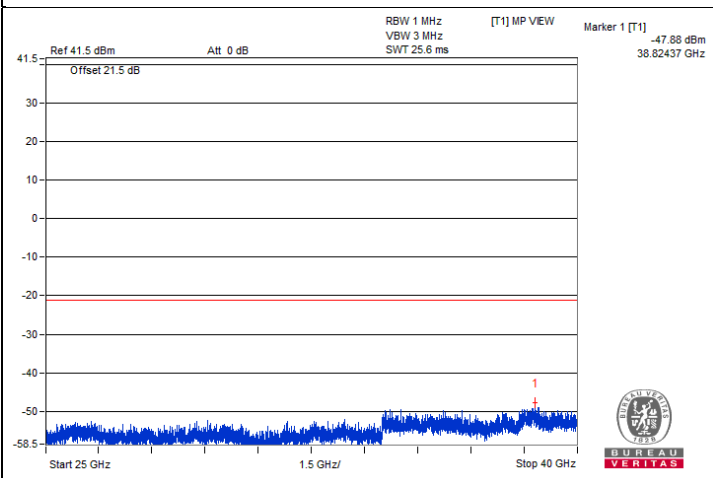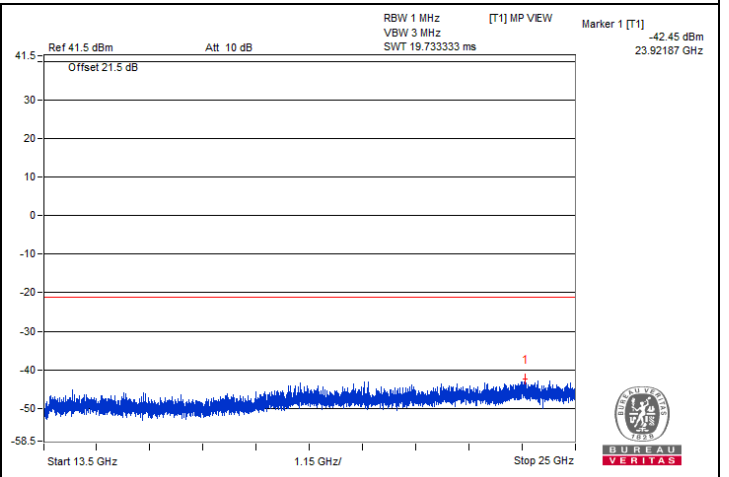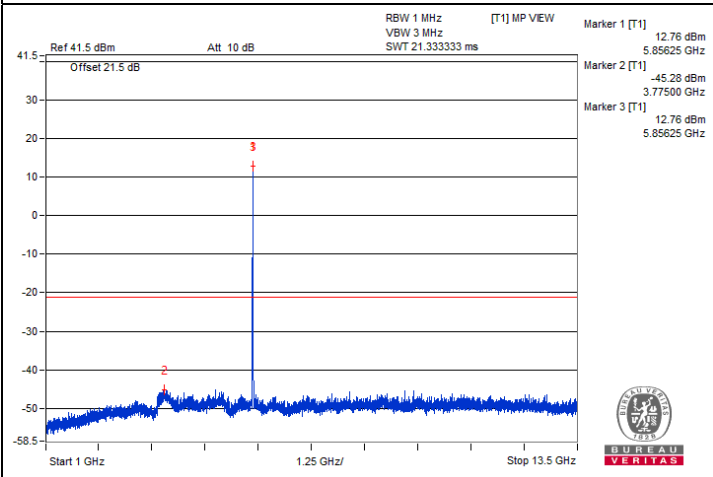




Chain 1

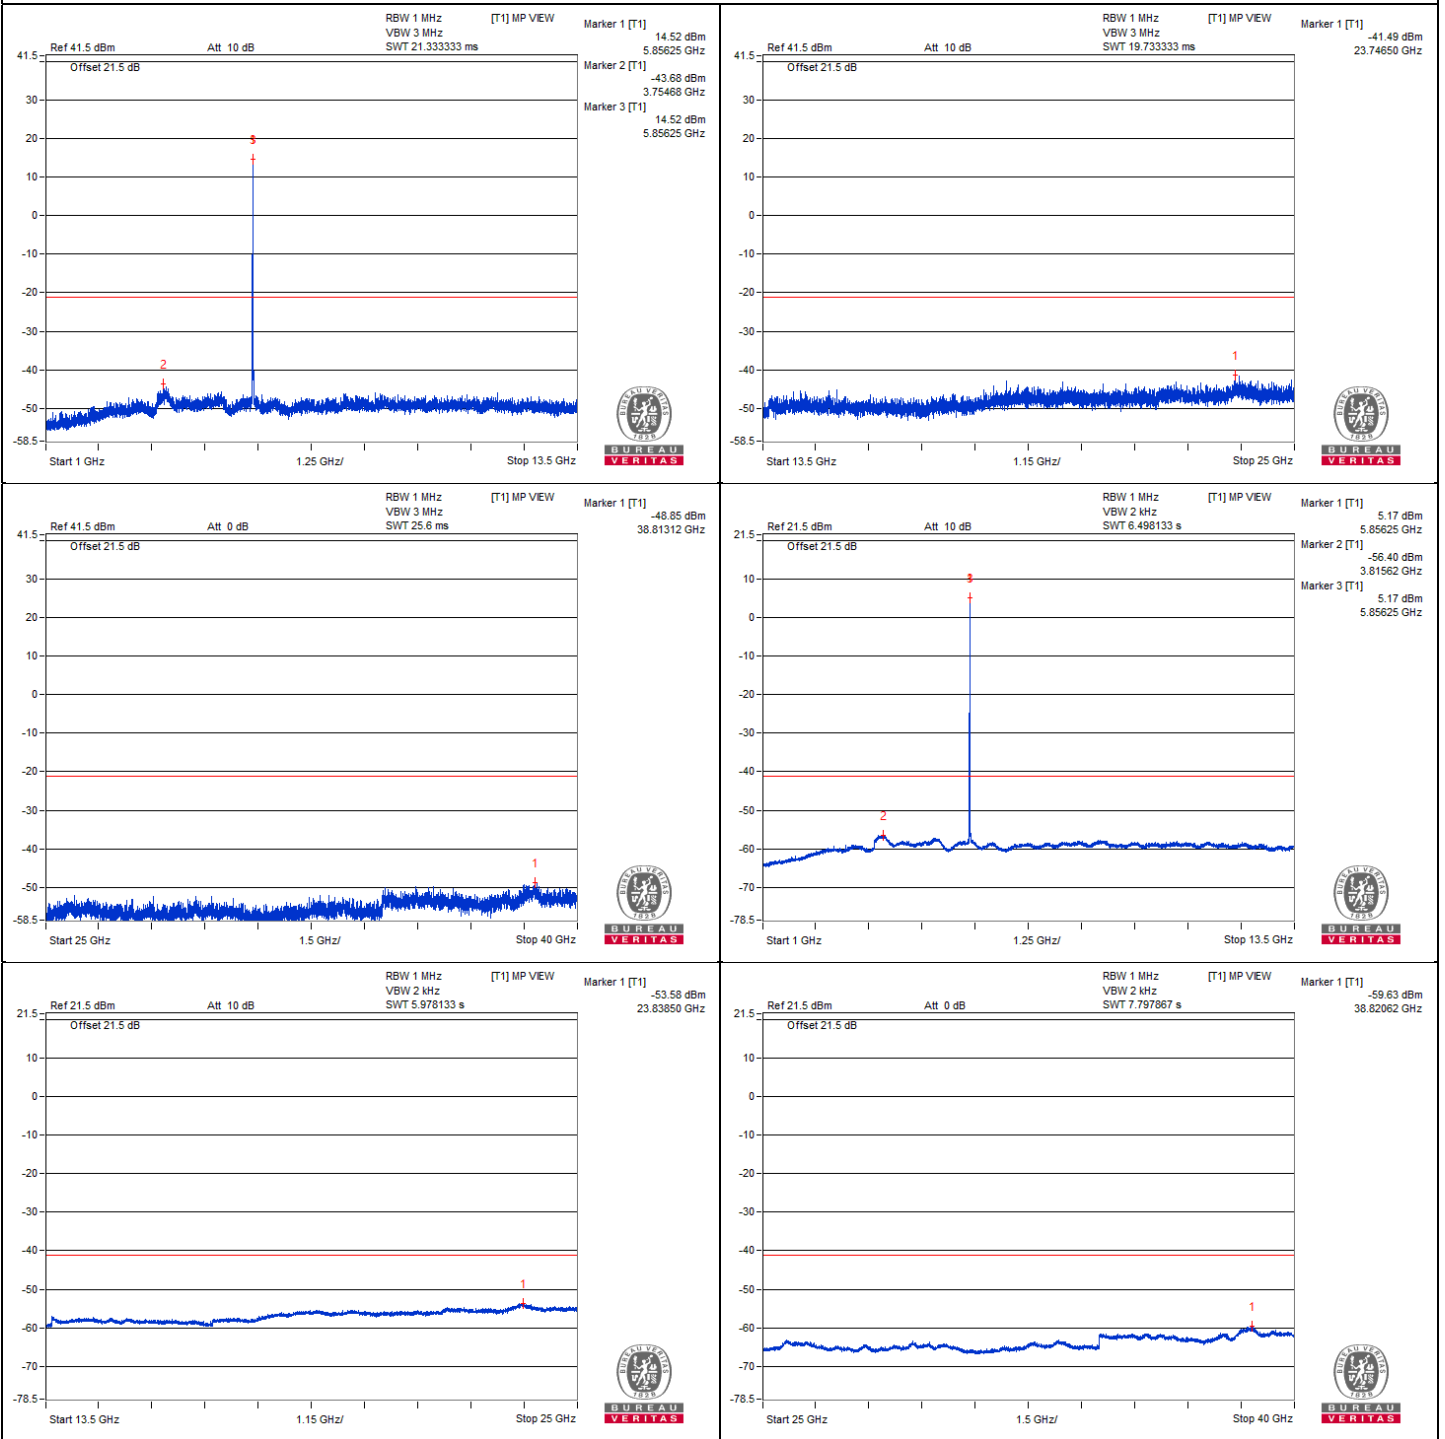




Bandedge table

Chain 0

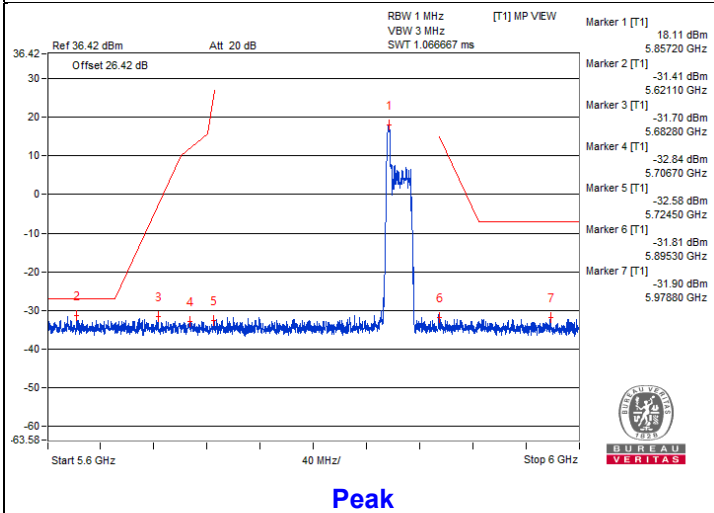


Peak

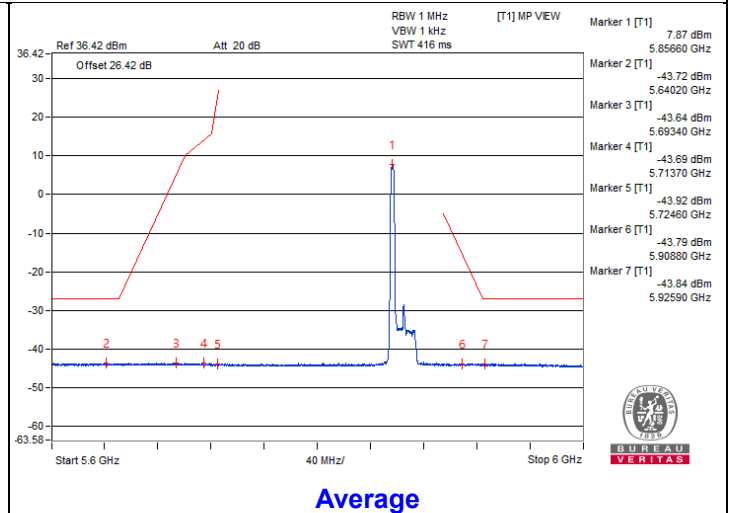


Average

Chain 1

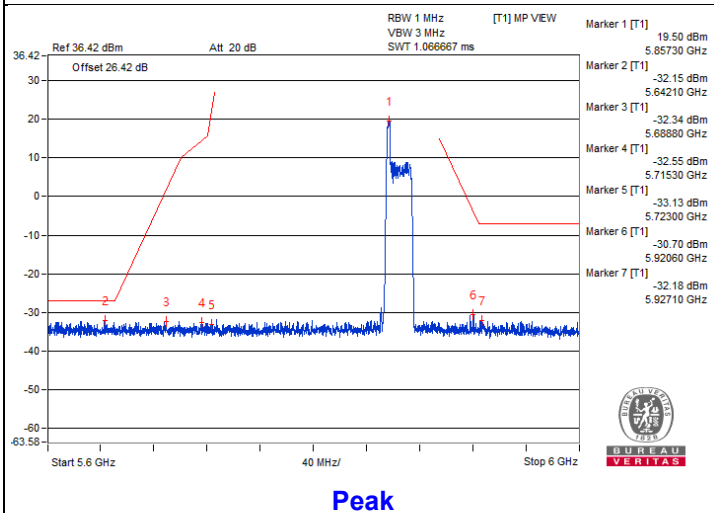

Peak

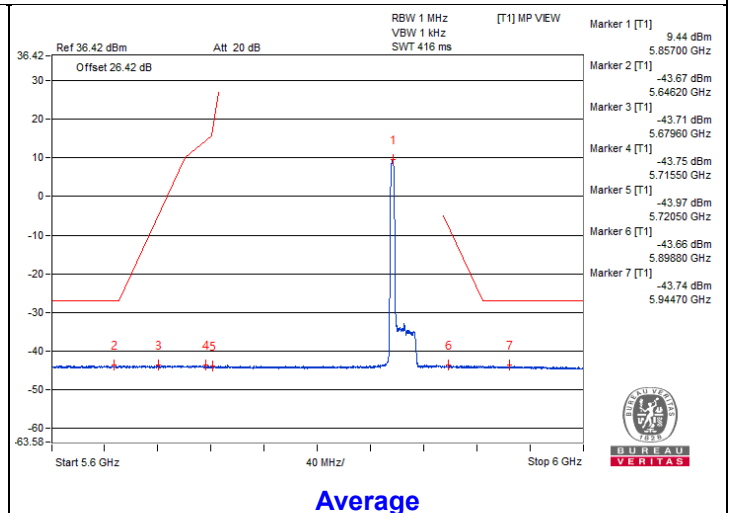

Average

802.11be (EHT20) 26-tone RU - Channel 177
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3909.37	55.9 PK	74	-18.1	-47.86	-46.79	4.92	-39.36
2	3904.68	45.74 AV	54	-8.26	-57.29	-57.61	4.92	-49.52
3	#7839.06	54.38 PK	68.2	-13.82	-49.57	-48.17	4.92	-40.88
4	11763.12	54.87 PK	74	-19.13	-49.94	-47.15	4.92	-40.39
5	11773.43	44.16 AV	54	-9.84	-59.13	-58.94	4.92	-51.10
6	#17647.18	55.63 PK	68.2	-12.57	-48.05	-47.12	4.92	-39.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

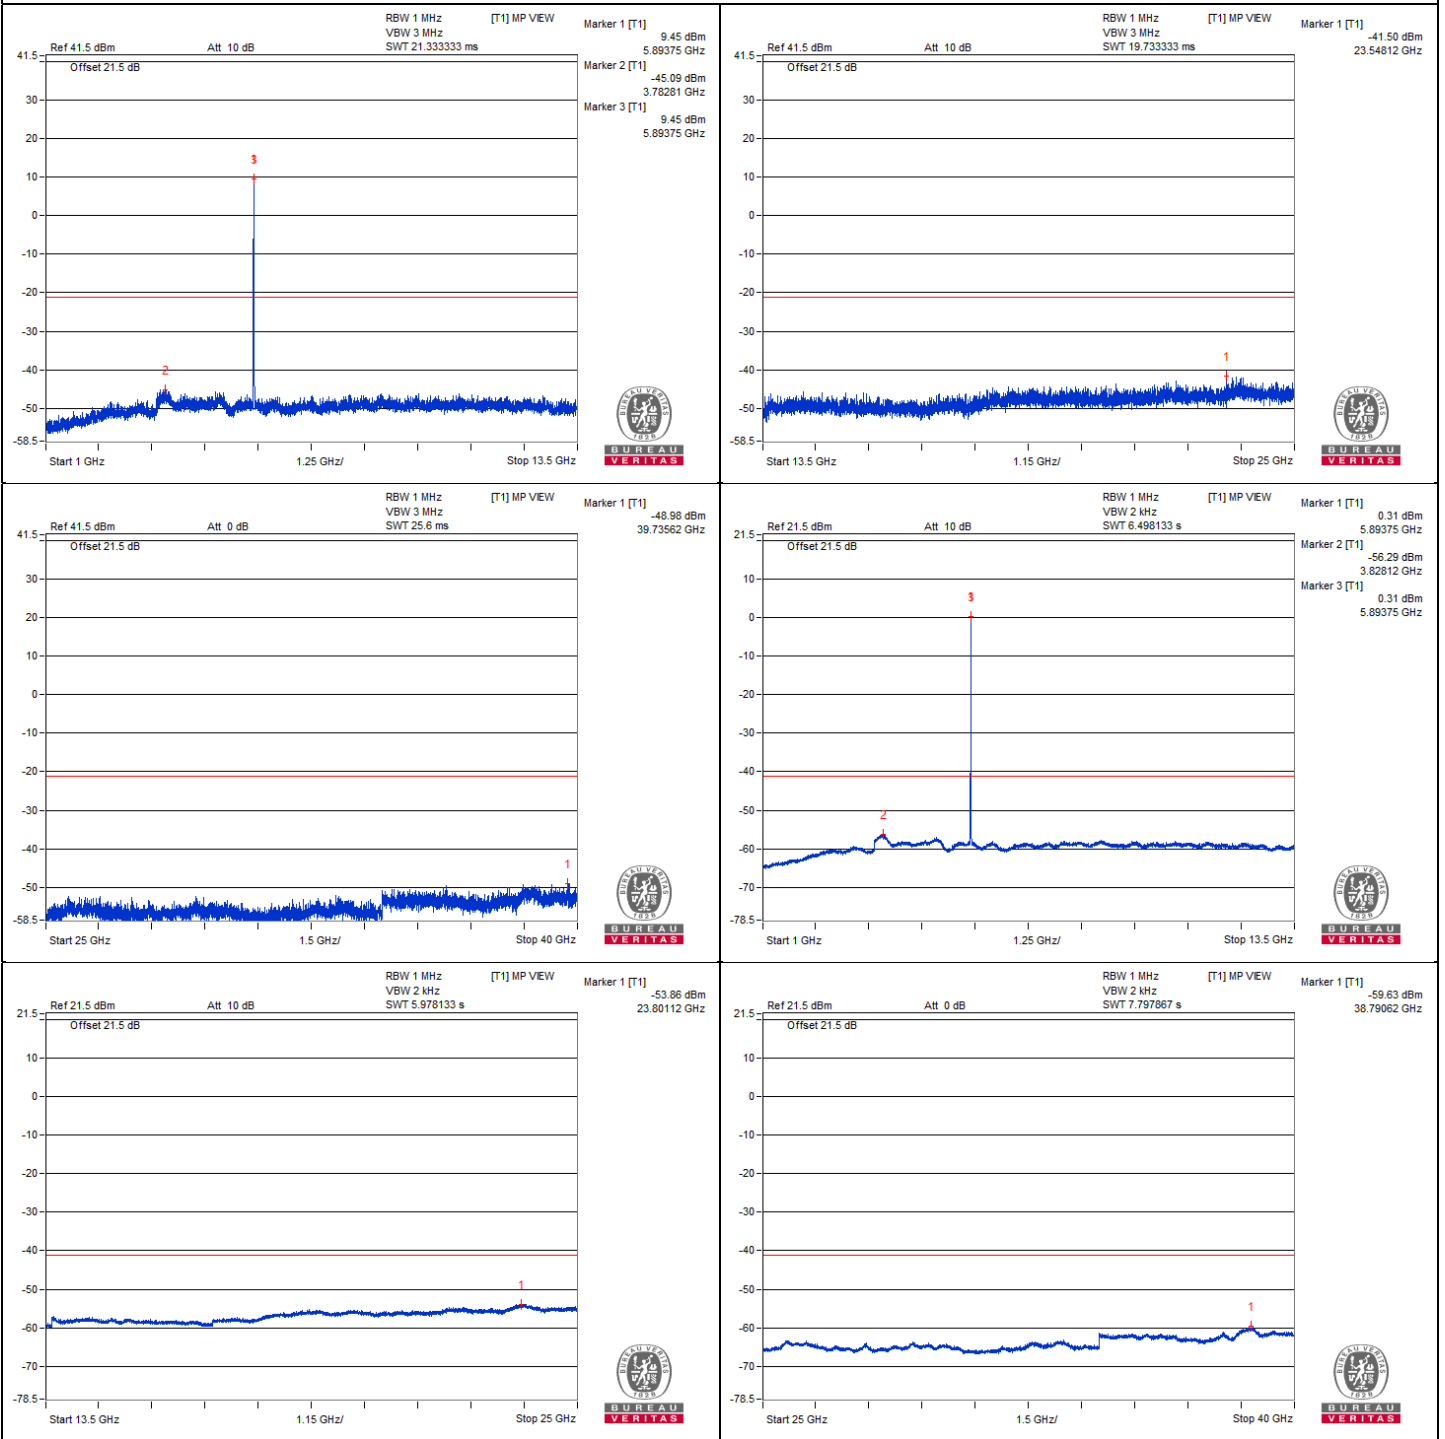




Chain 1

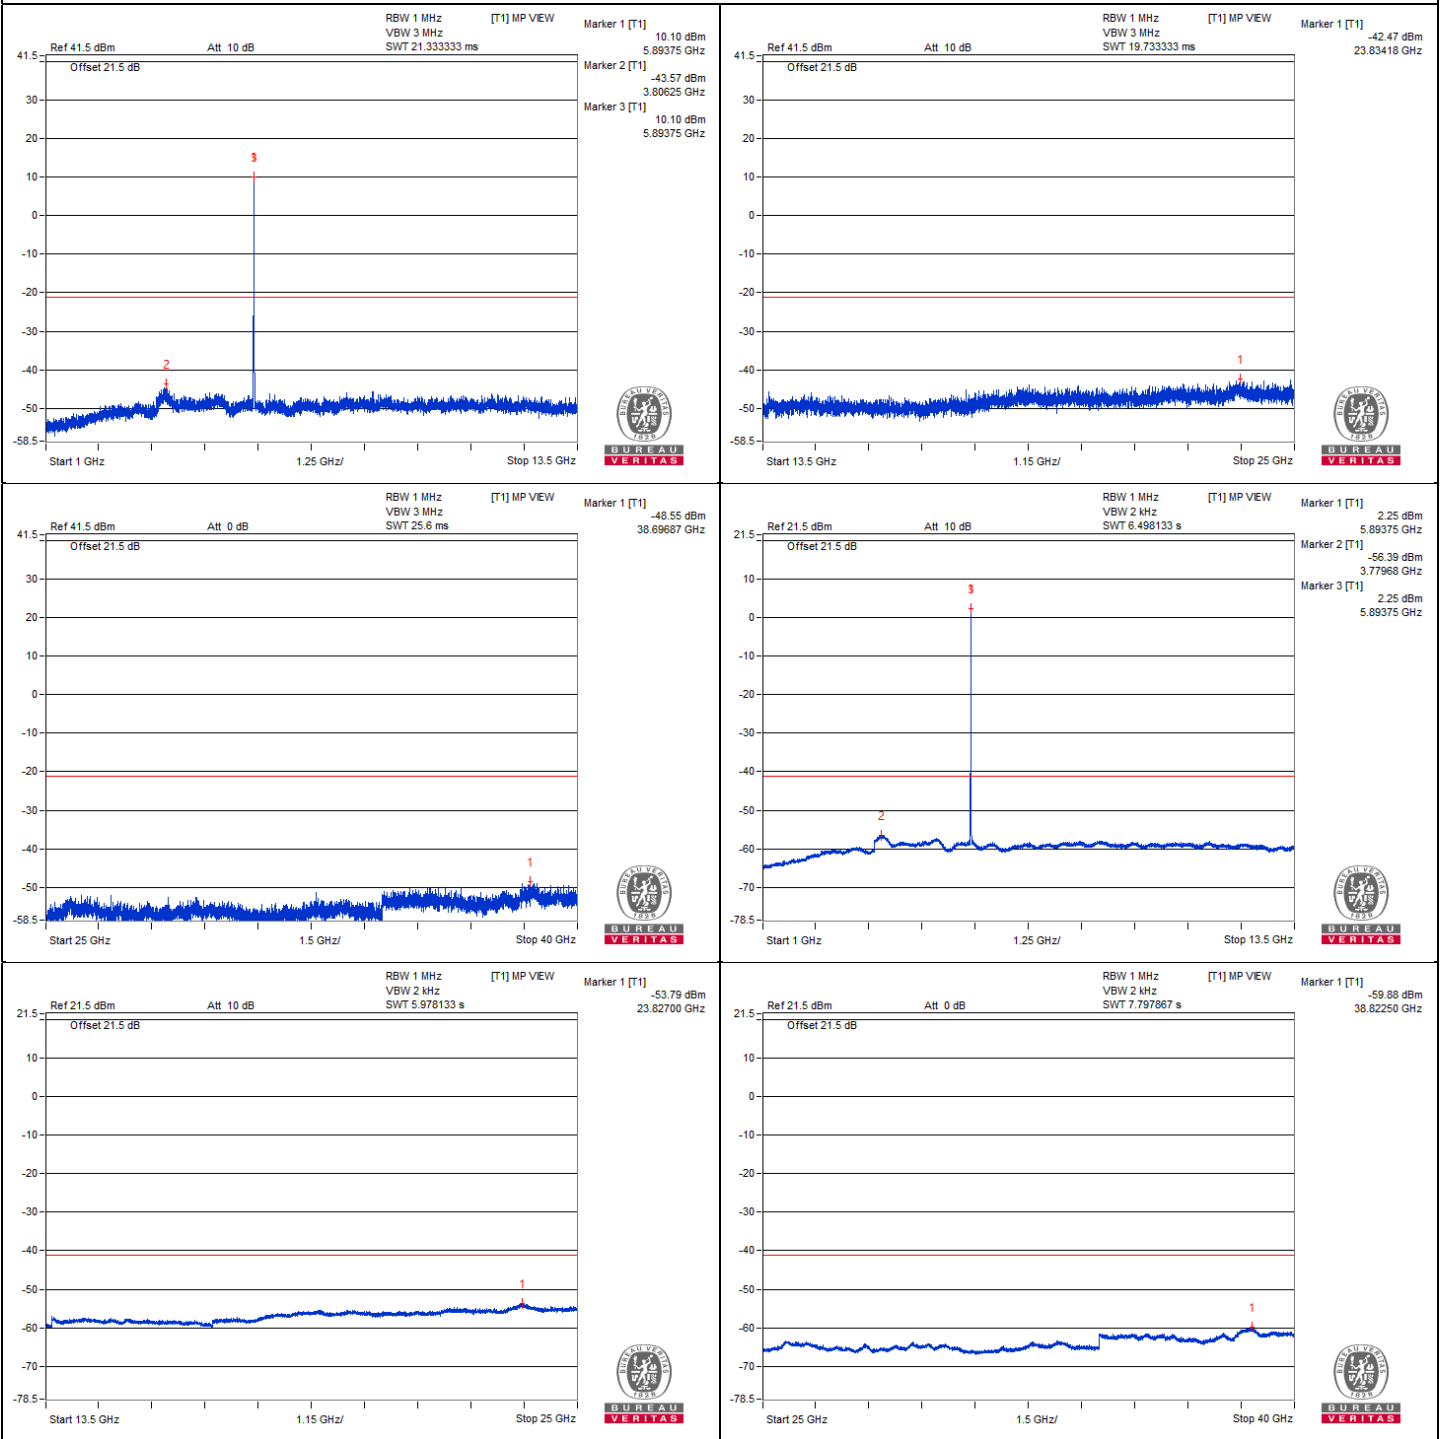




Bandedge table

Chain 0

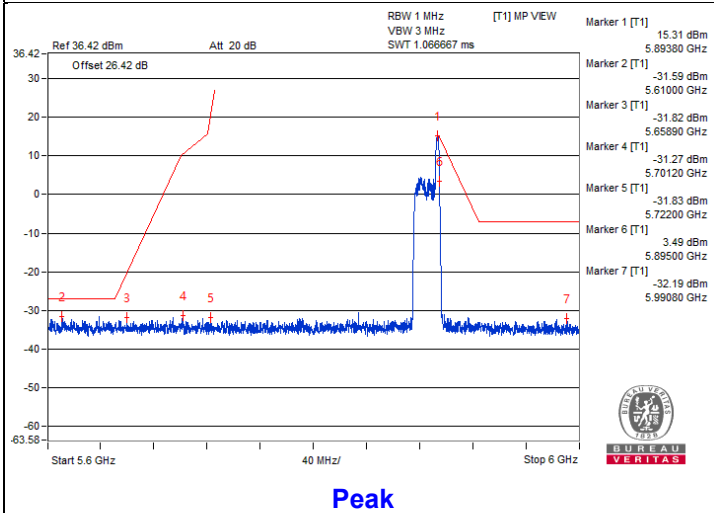


Peak

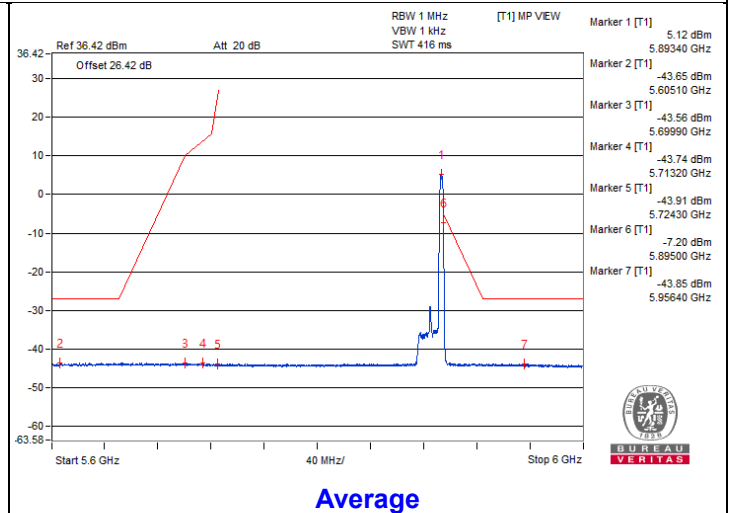


Average

Chain 1

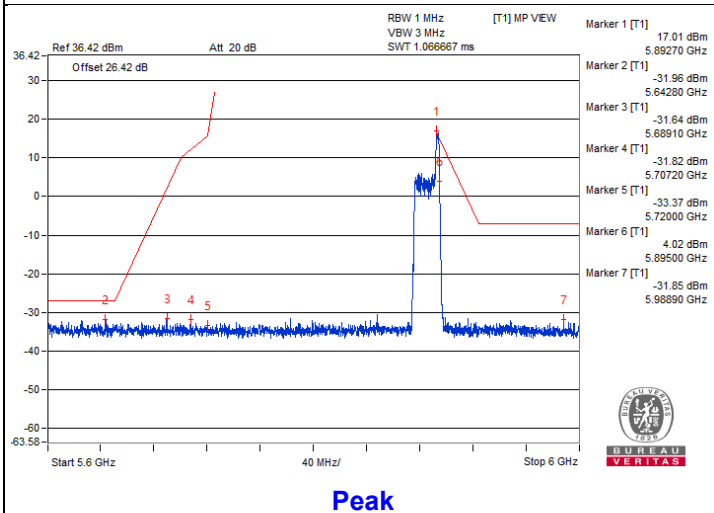

Peak

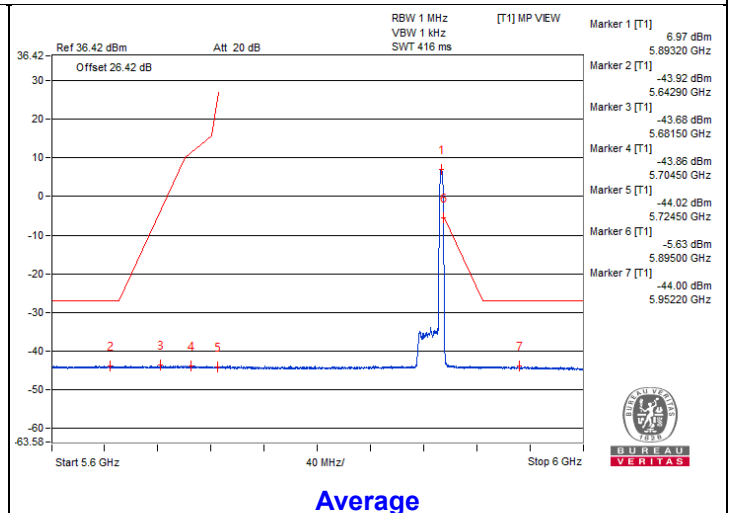

Average

802.11be (EHT20) 52-tone RU - Channel 169

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3885.93	56.68 PK	74	-17.32	-46.52	-46.5	4.92	-38.58
2	3882.81	45.93 AV	54	-8.07	-57.35	-57.17	4.92	-49.33
3	#7790.62	54.15 PK	68.2	-14.05	-49.66	-48.5	4.92	-41.11
4	11692.18	54.85 PK	74	-19.15	-47.65	-49.16	4.92	-40.41
5	11679.68	44.17 AV	54	-9.83	-58.75	-59.31	4.92	-51.09
6	#17539.37	55.6 PK	68.2	-12.6	-49.56	-46.24	4.92	-39.66

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

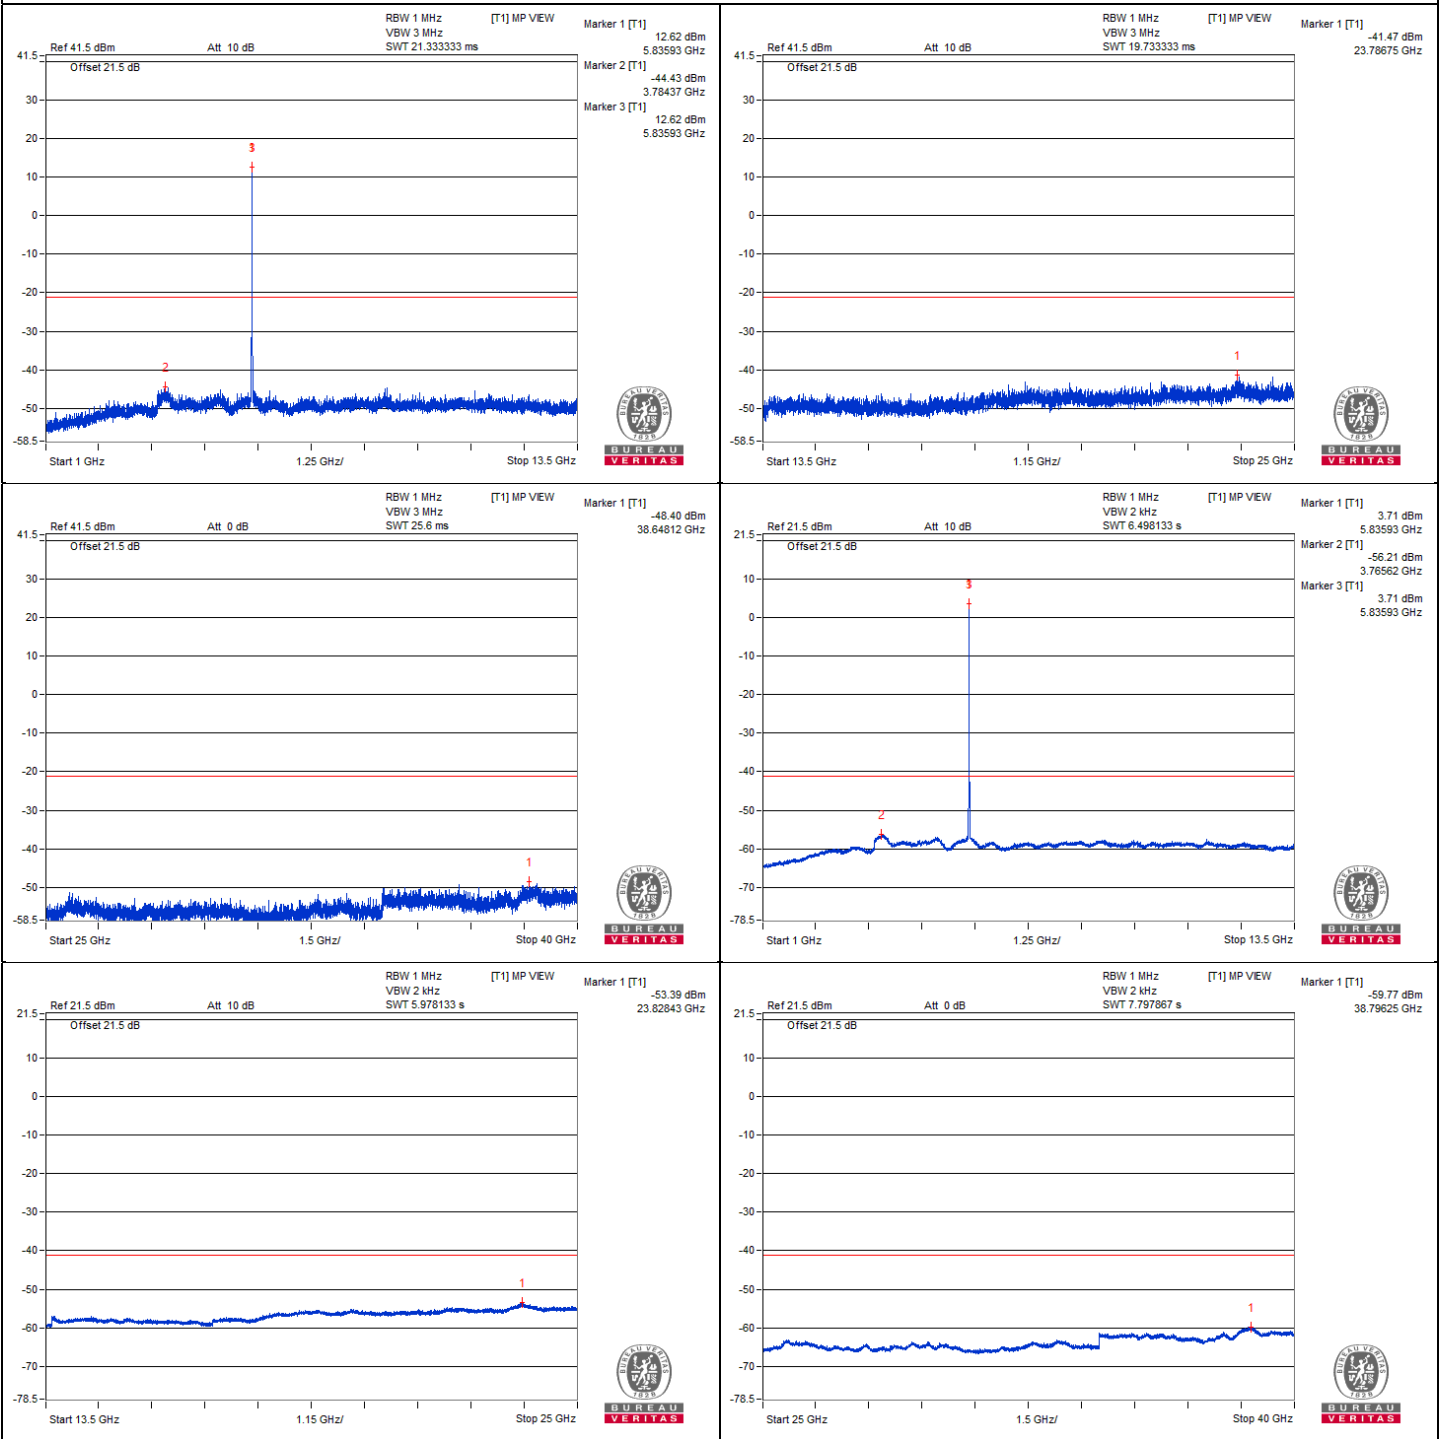





Chain 1

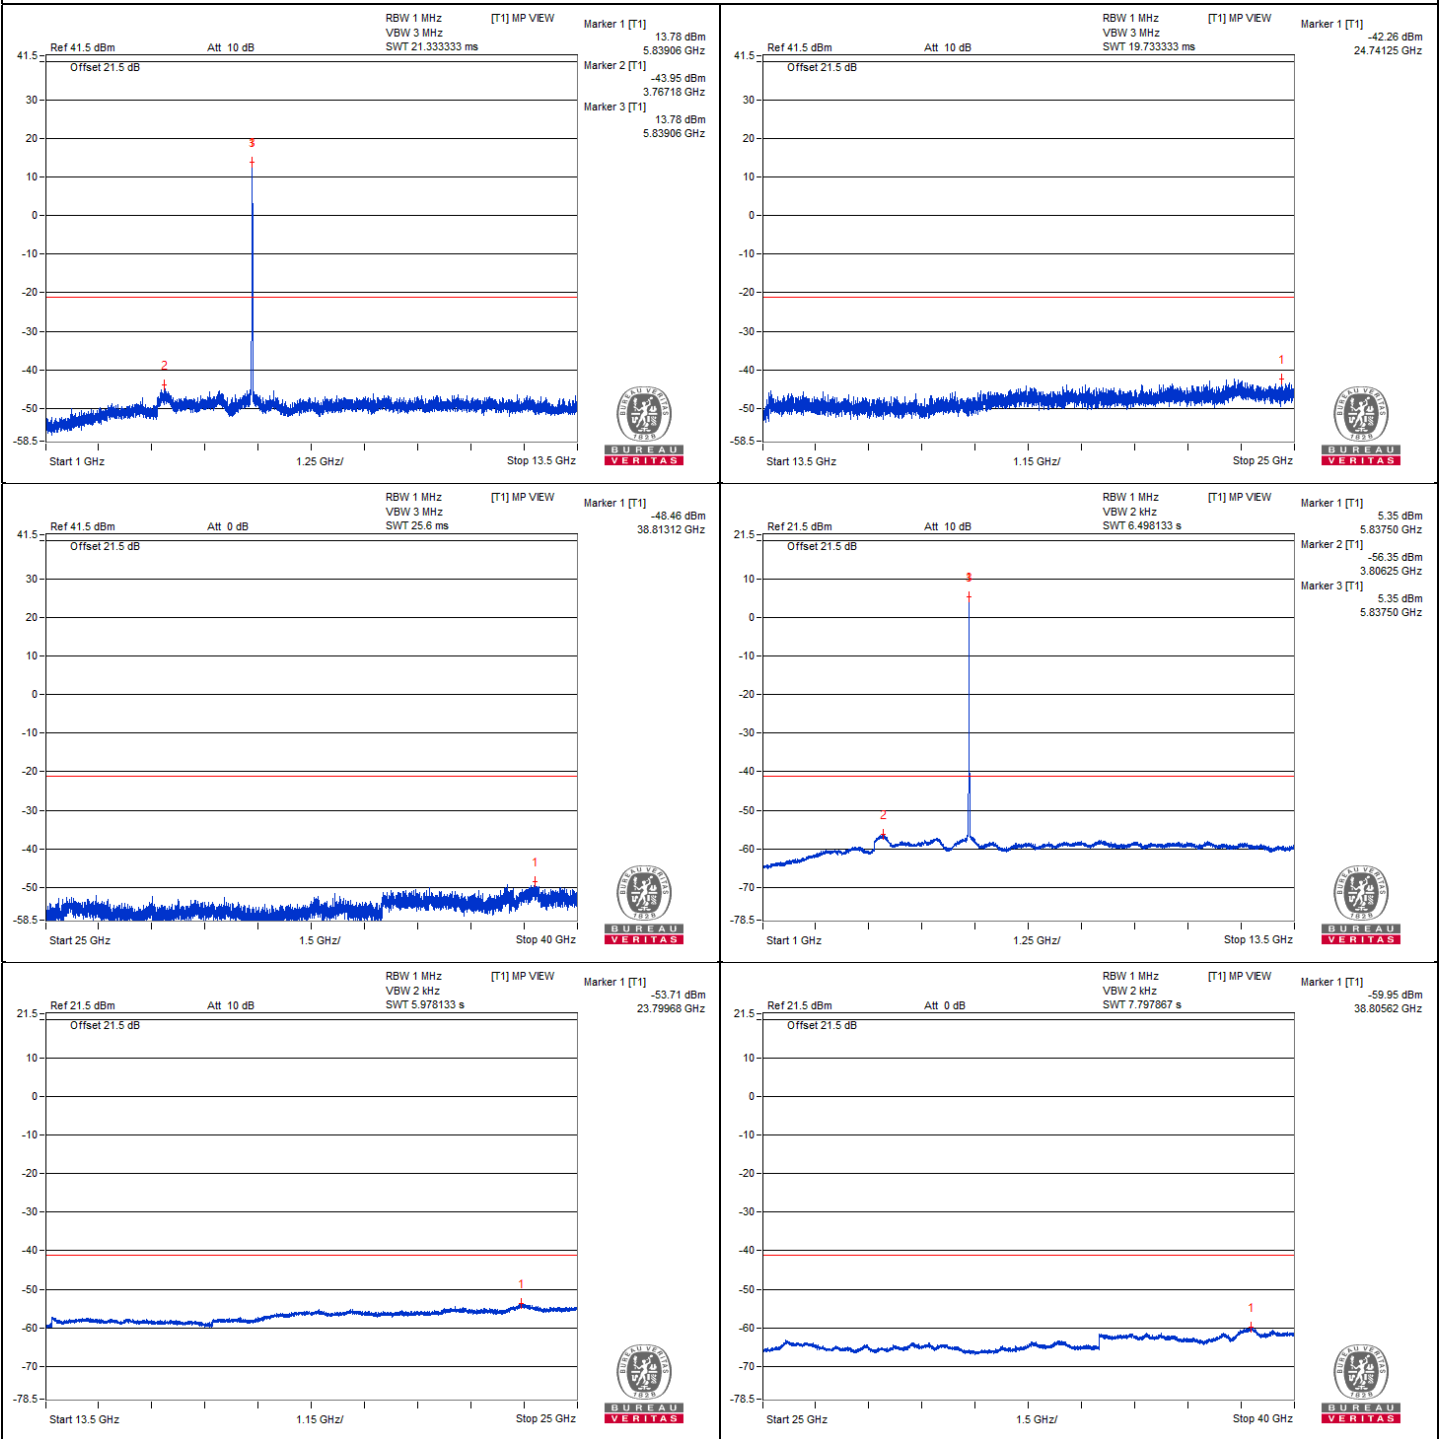





Bandedge table

Chain 0

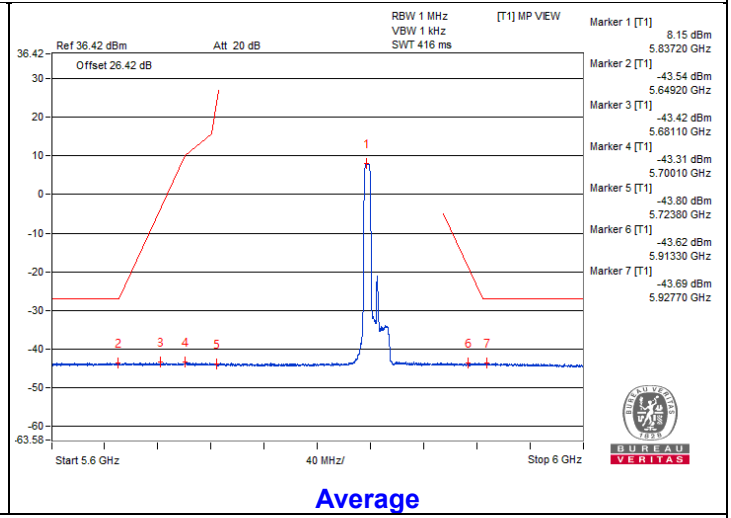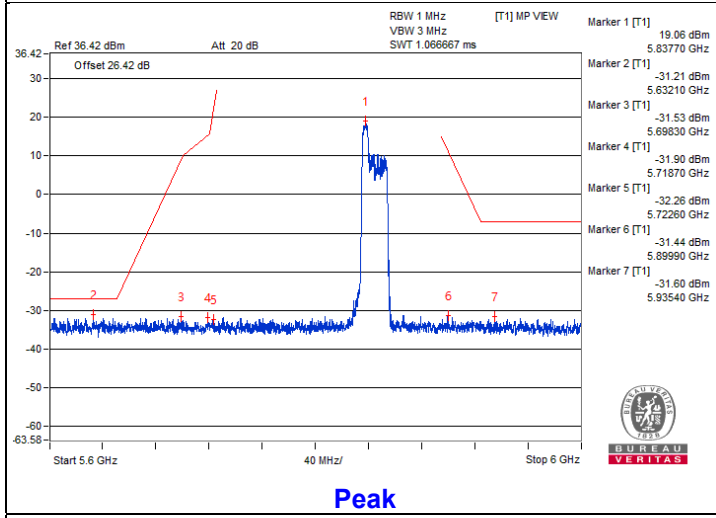

Chain 1

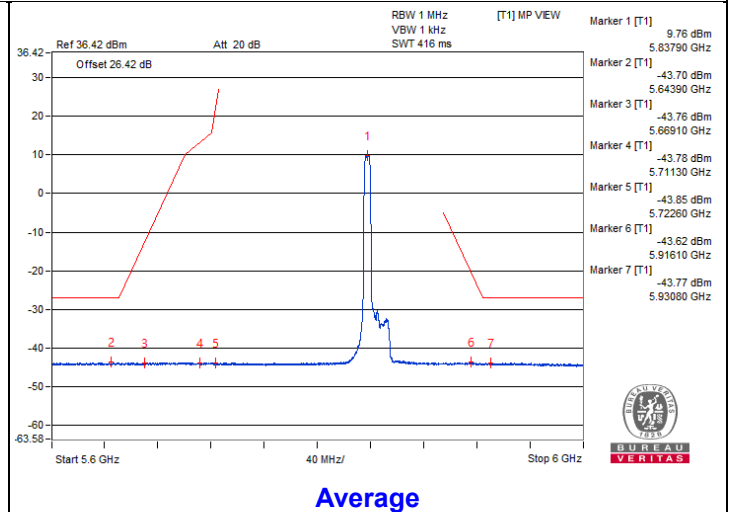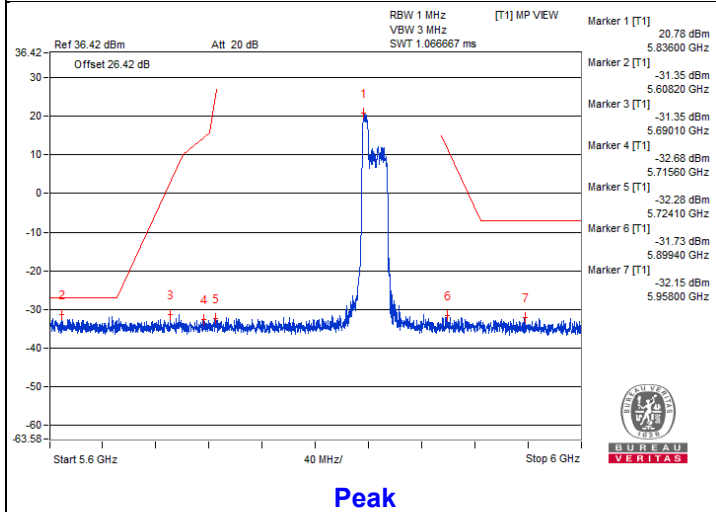

802.11be (EHT20) 52-tone RU - Channel 173
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3906.25	57.33 PK	74	-16.67	-44.5	-47.86	4.92	-37.93
2	3892.18	45.94 AV	54	-8.06	-57.04	-57.48	4.92	-49.32
3	#7832.81	54.02 PK	68.2	-14.18	-49.28	-49.07	4.92	-41.24
4	11750	54.26 PK	74	-19.74	-48.49	-49.42	4.92	-41.00
5	11735.32	44.22 AV	54	-9.78	-59.03	-58.92	4.92	-51.04
6	#17614.12	56.04 PK	68.2	-12.16	-47.12	-47.19	4.92	-39.22

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

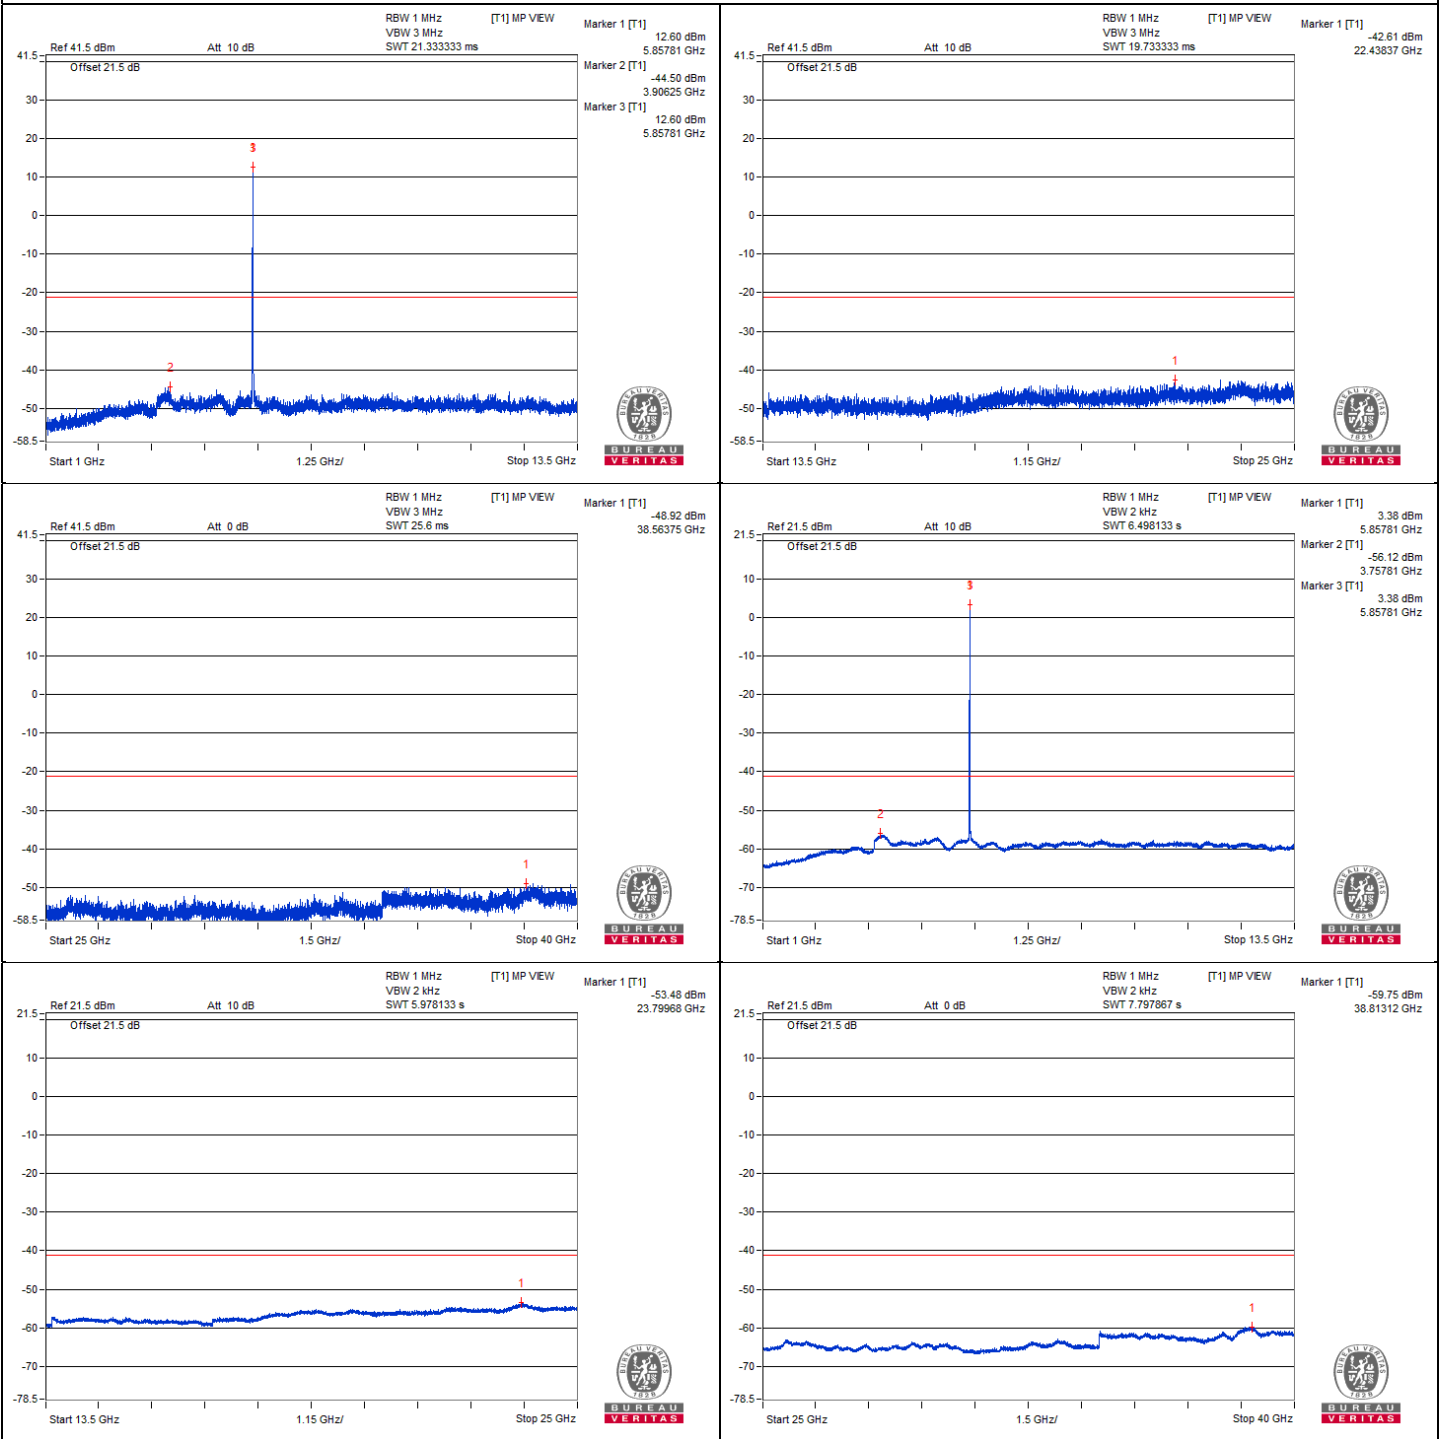




Chain 1

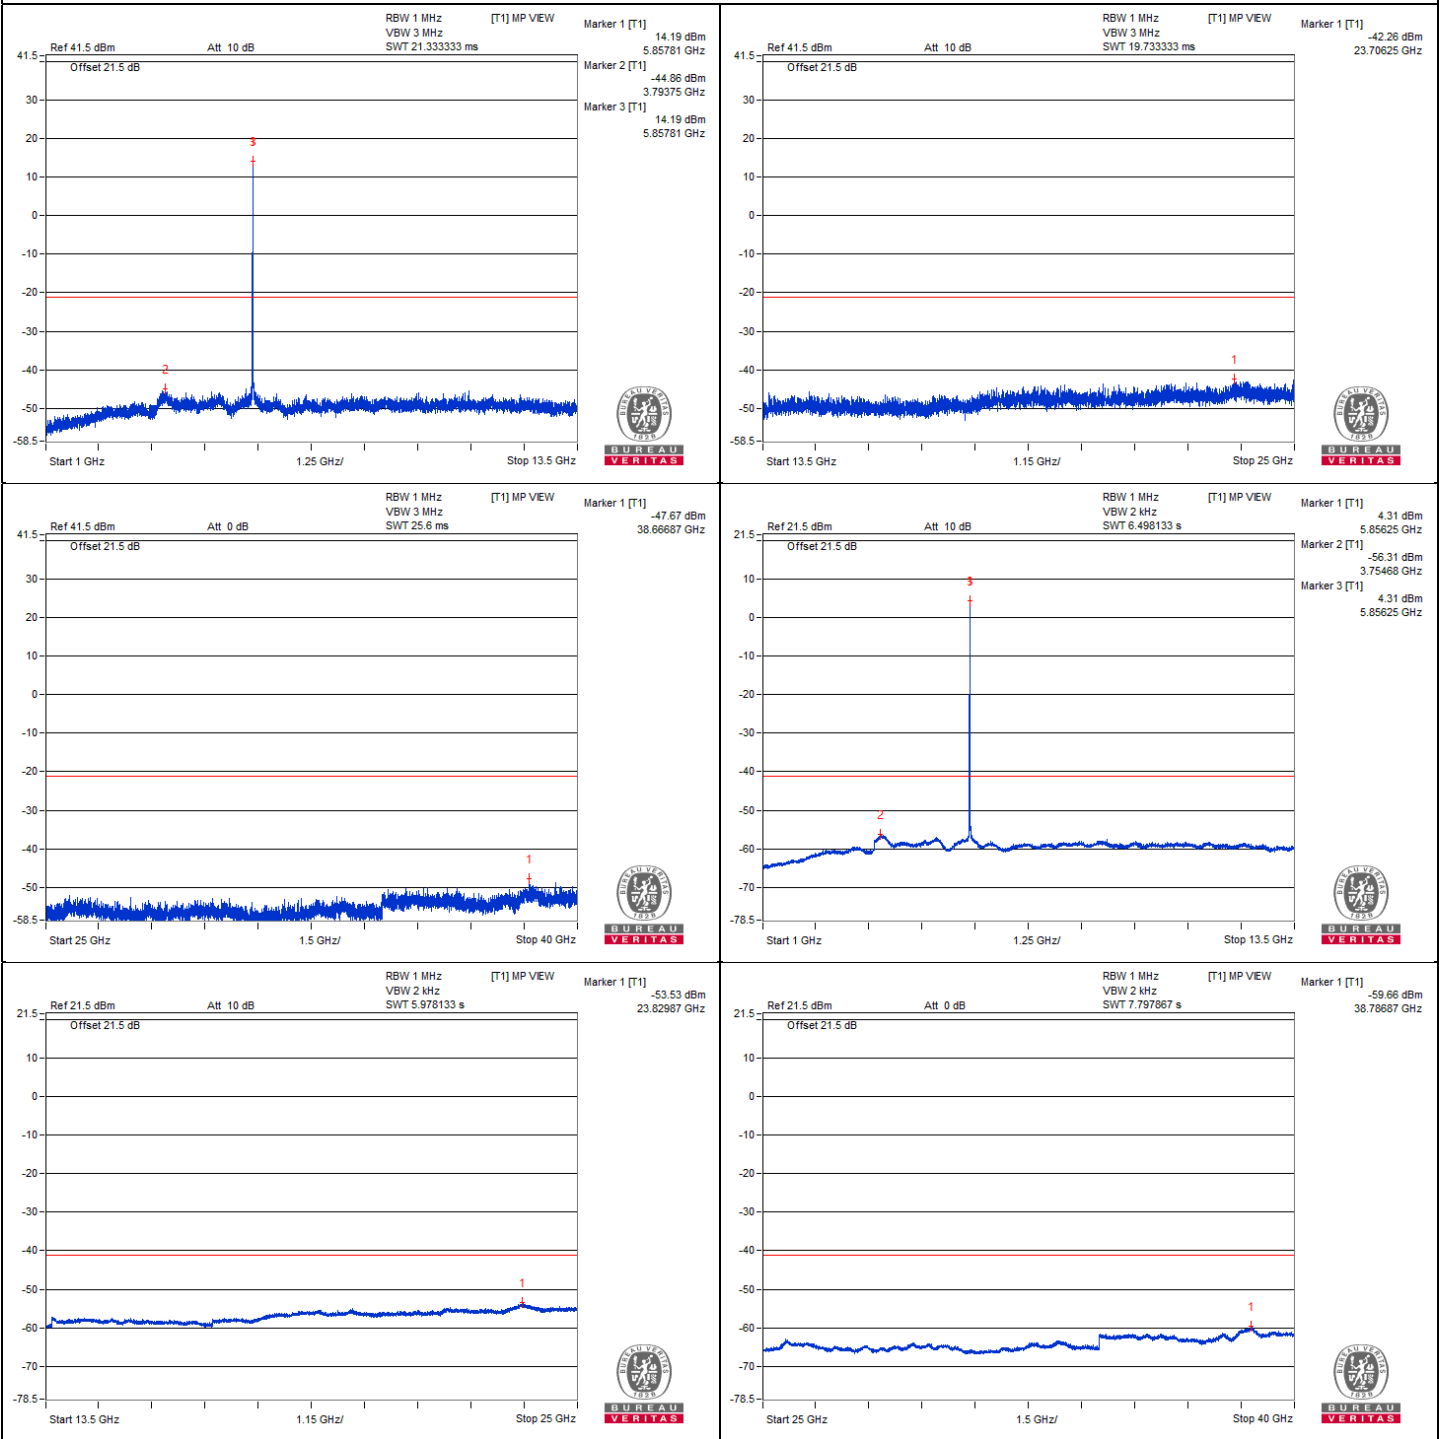




Bandedge table

Chain 0

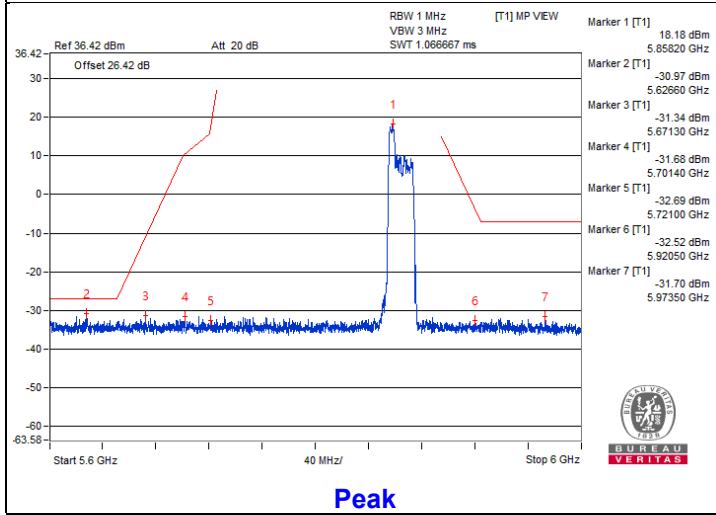


Peak

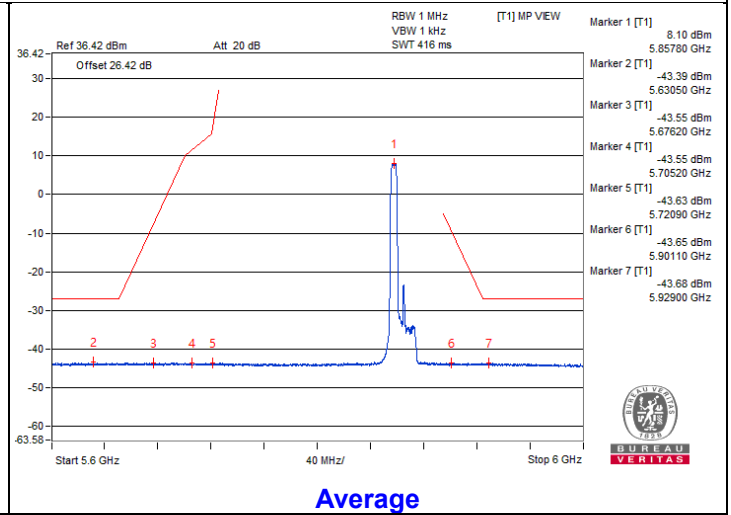


Average

Chain 1

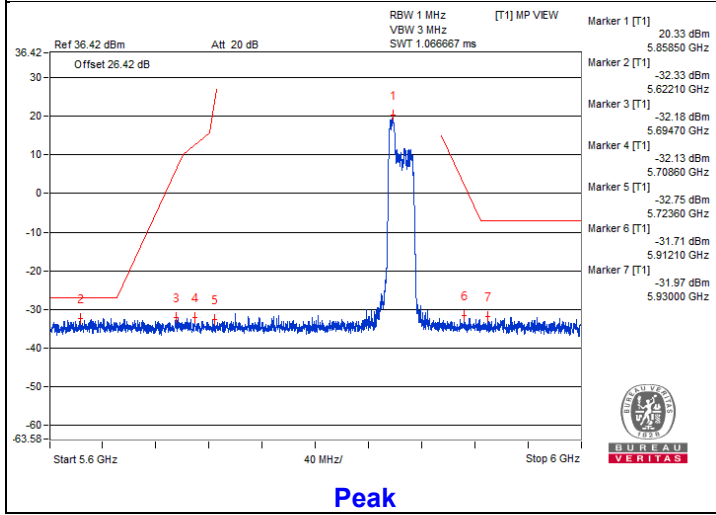

Peak

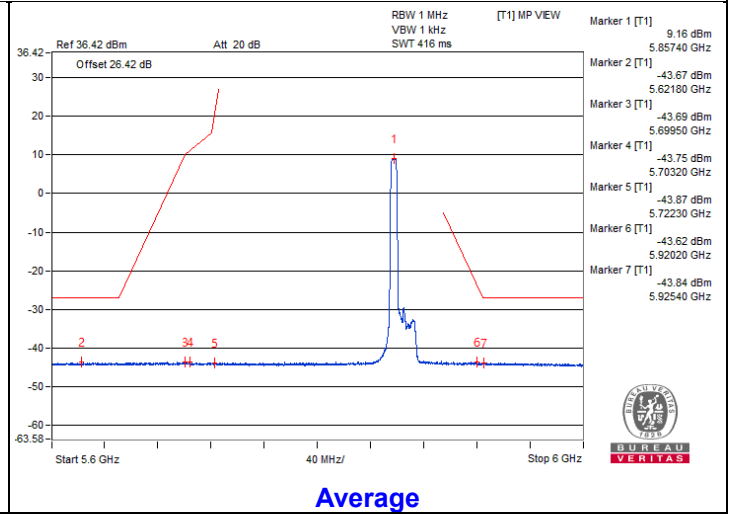

Average

802.11be (EHT20) 52-tone RU - Channel 177
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3909.37	56.28 PK	74	-17.72	-46.16	-47.83	4.92	-38.98
2	3907.81	45.76 AV	54	-8.24	-57.55	-57.31	4.92	-49.50
3	#7837.5	54.55 PK	68.2	-13.65	-48.24	-49.08	4.92	-40.71
4	11784.37	54.81 PK	74	-19.19	-48.65	-48.13	4.92	-40.45
5	11785.93	44.35 AV	54	-9.65	-59.22	-58.5	4.92	-50.91
6	#17652.93	55.7 PK	68.2	-12.5	-47.91	-47.11	4.92	-39.56

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

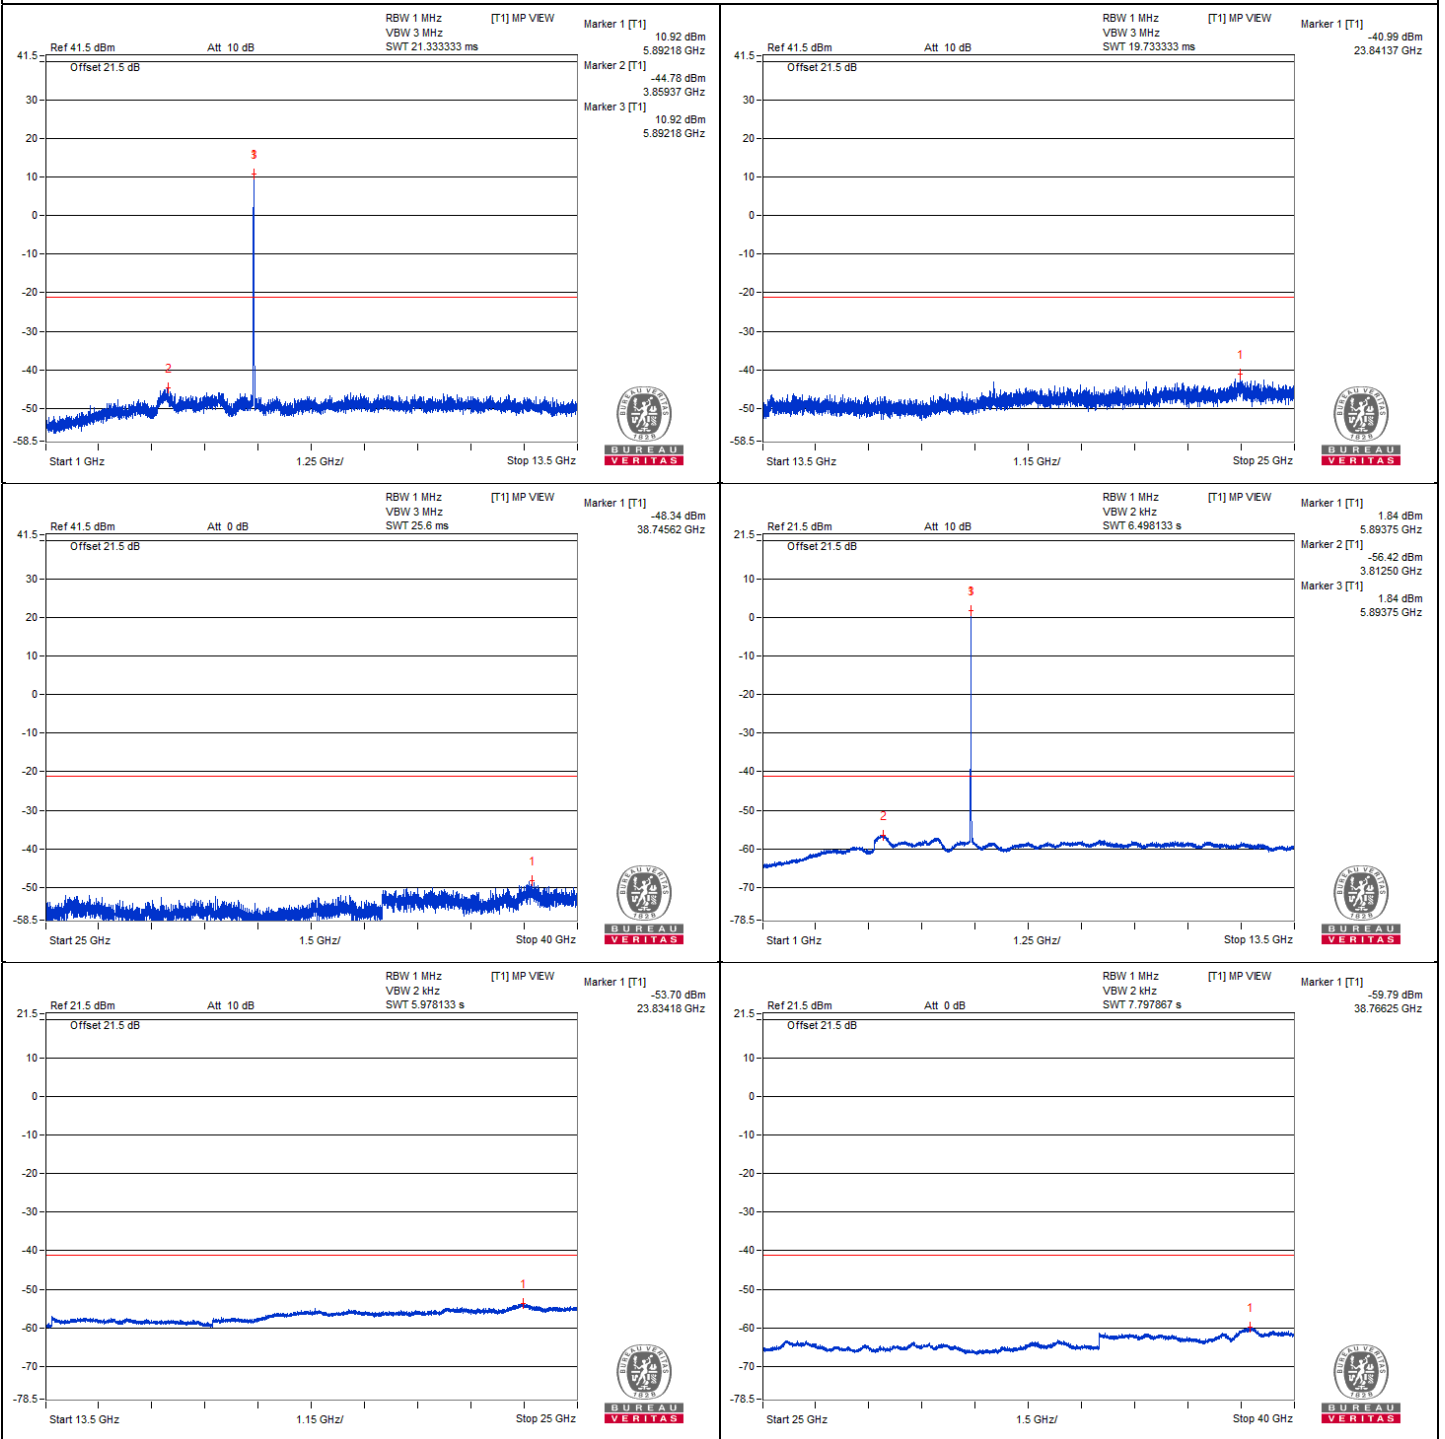





Chain 1

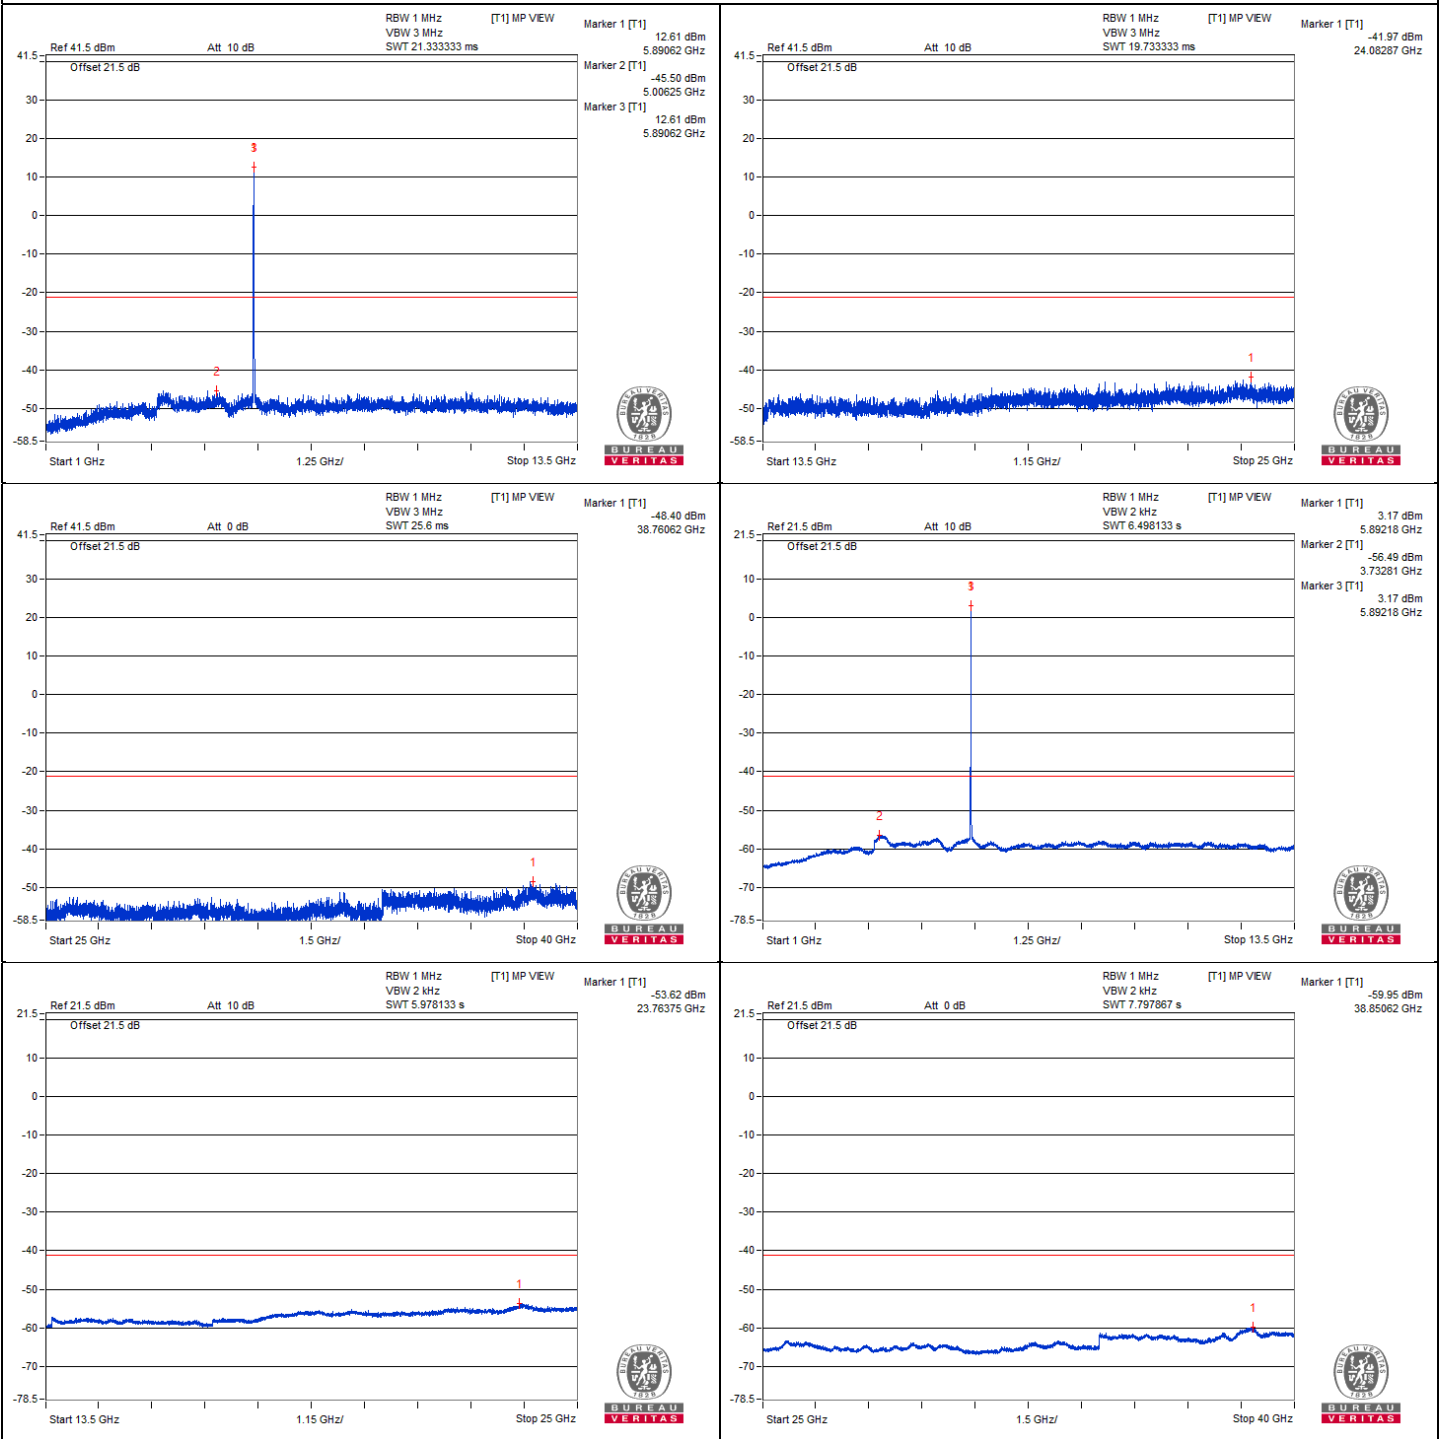





Bandedge table

Chain 0

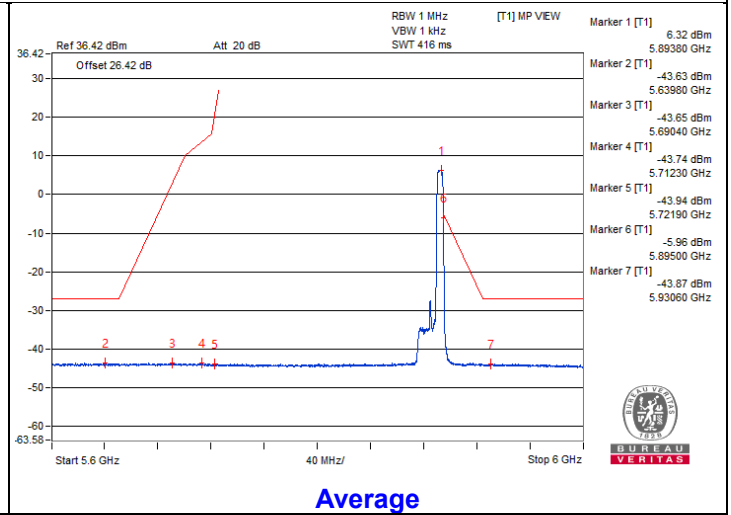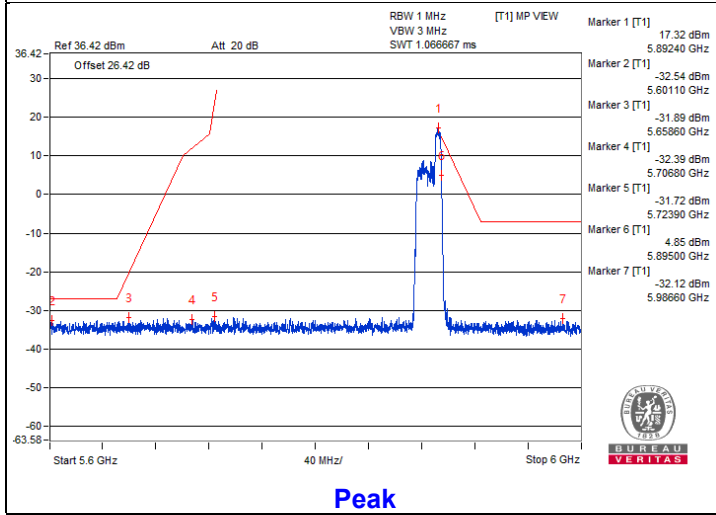

Chain 1

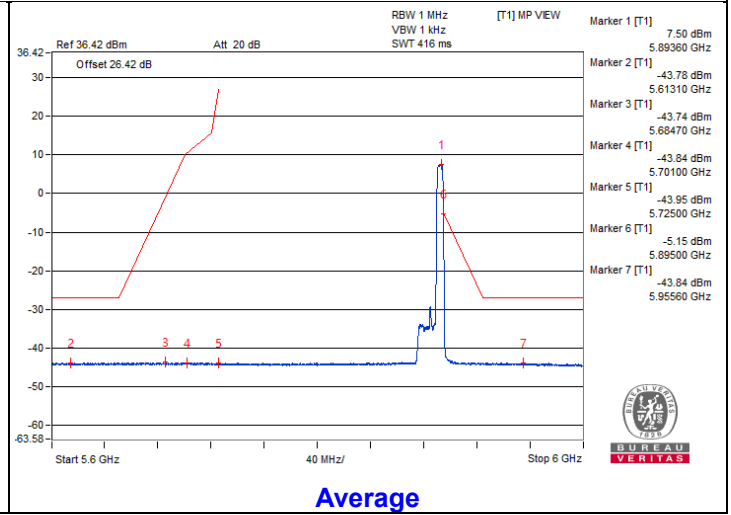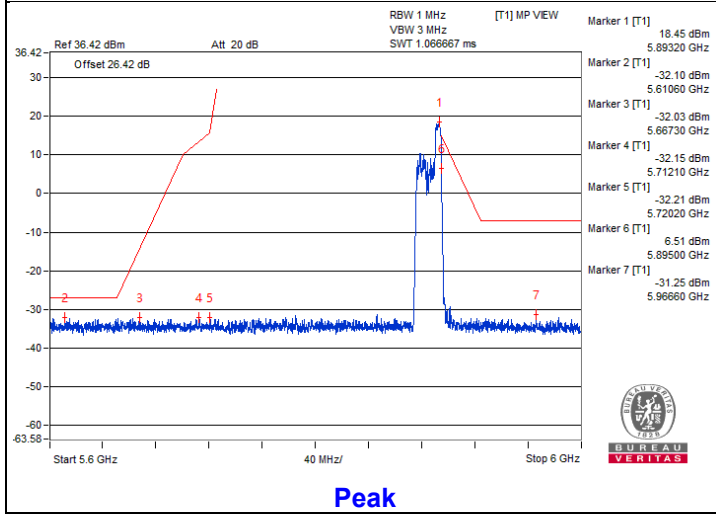

802.11be (EHT20) 106-tone RU - Channel 169

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3896.87	56.55 PK	74	-17.45	-46.42	-46.88	4.92	-38.71
2	3884.37	46.03 AV	54	-7.97	-57.32	-57	4.92	-49.23
3	#7804.68	54.93 PK	68.2	-13.27	-48.12	-48.41	4.92	-40.33
4	11690.62	54.67 PK	74	-19.33	-47.82	-49.35	4.92	-40.59
5	11687.5	44.16 AV	54	-9.84	-59.08	-58.99	4.92	-51.10
6	#17553.75	55.81 PK	68.2	-12.39	-45.88	-49.69	4.92	-39.45

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

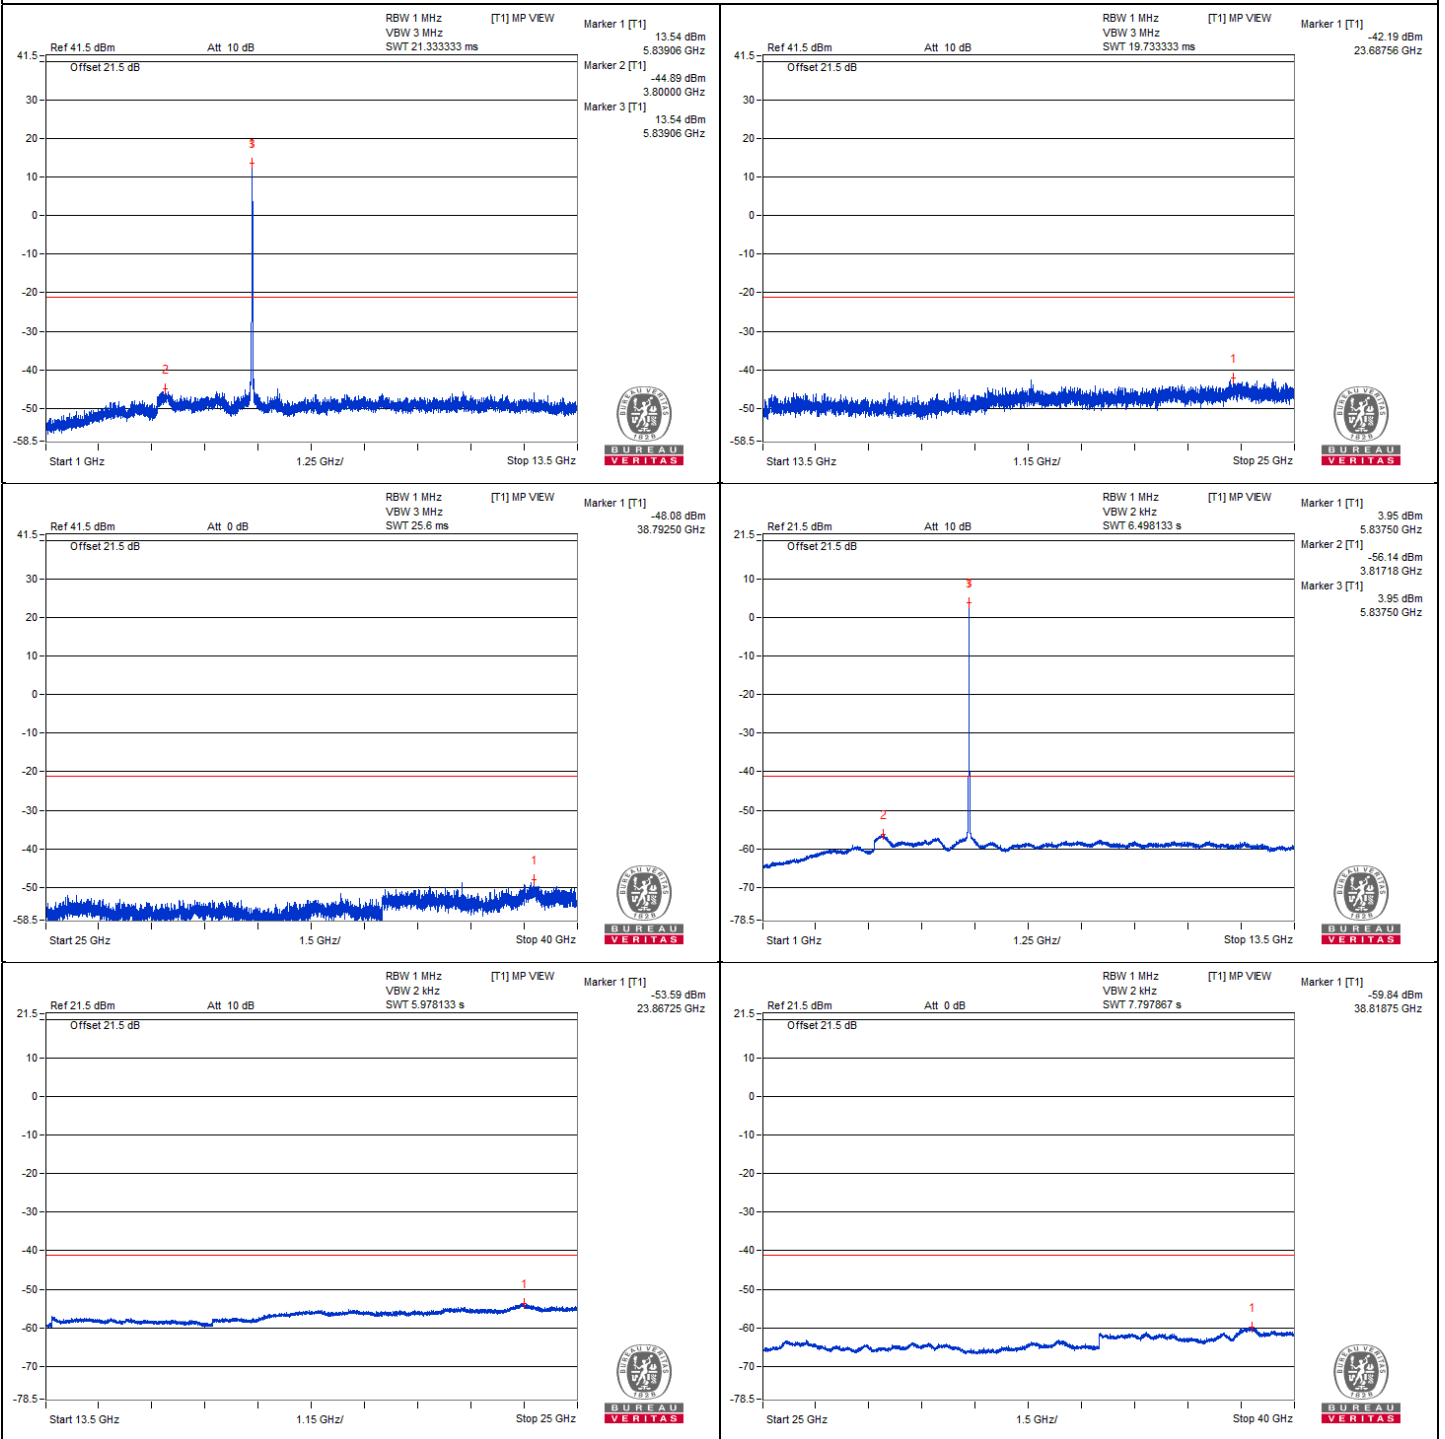




Chain 1

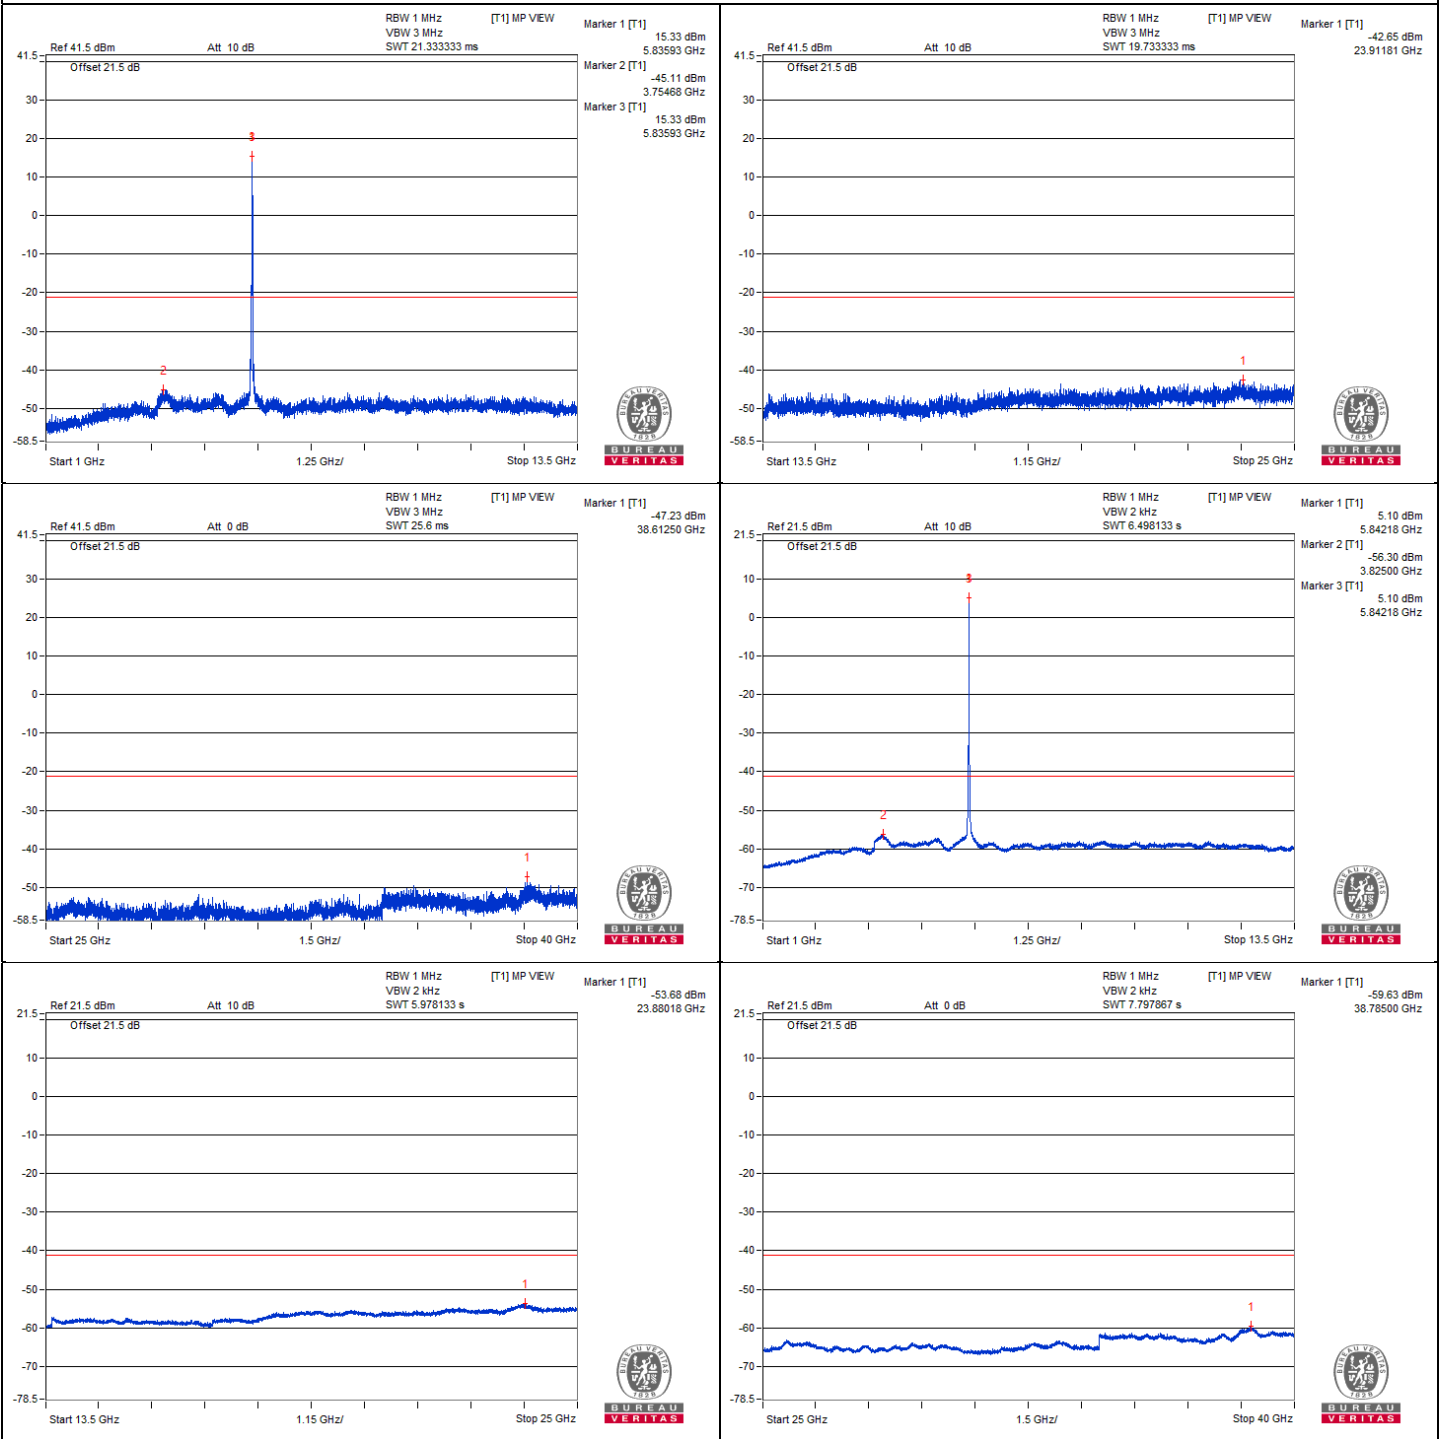




Bandedge table

Chain 0

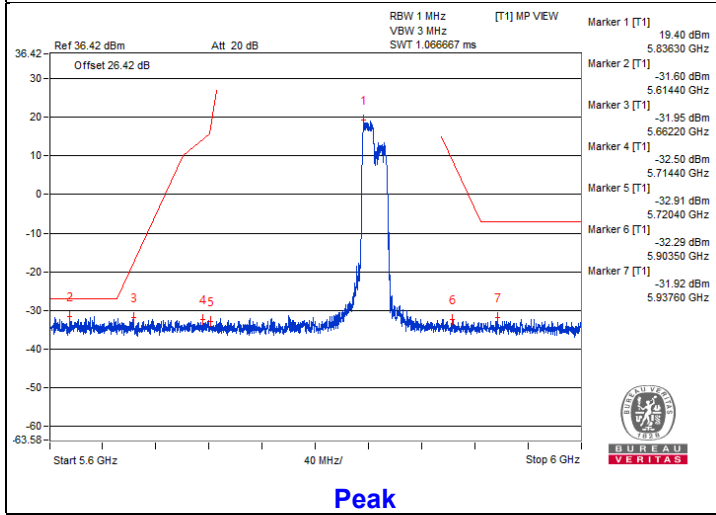


Peak

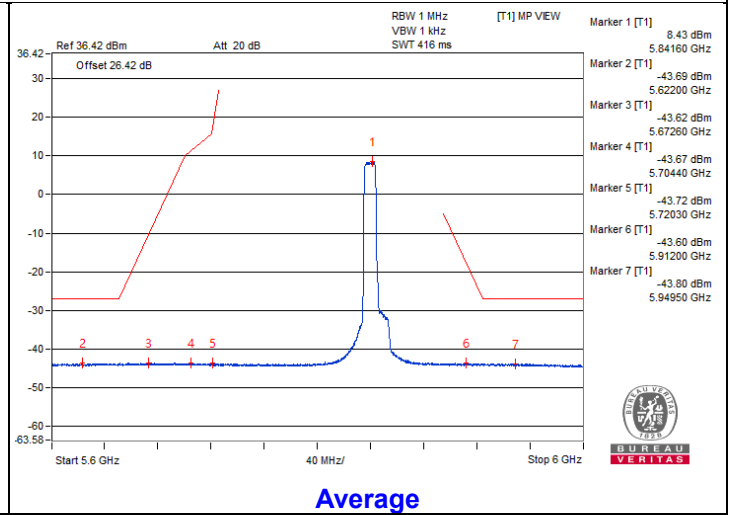


Average

Chain 1

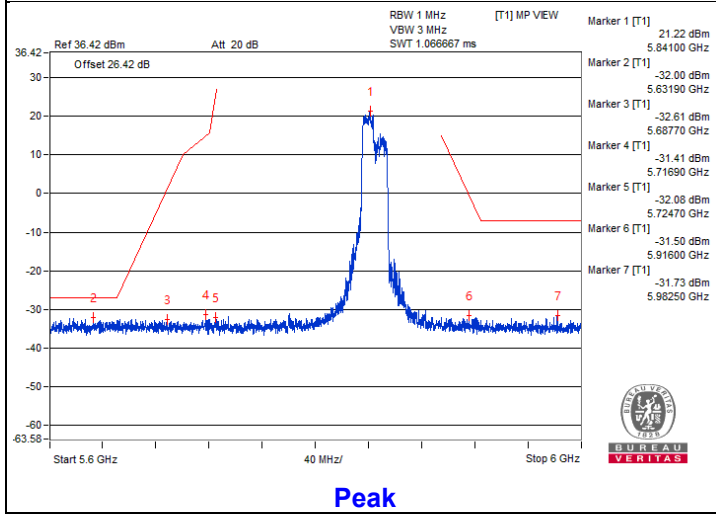

Peak

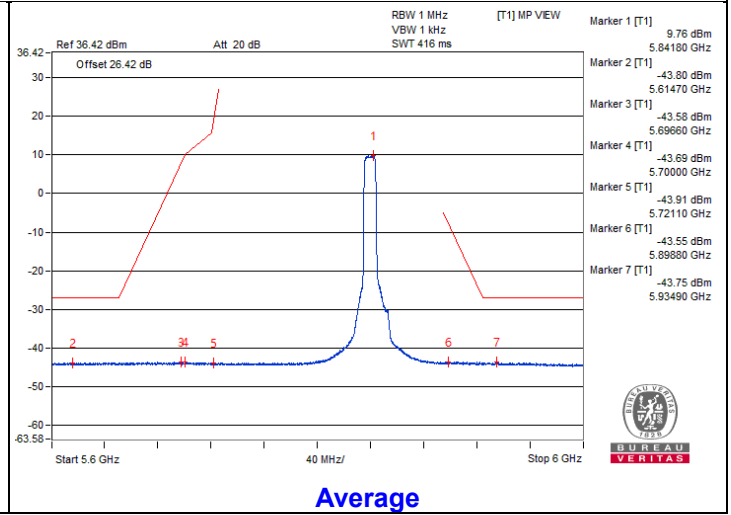

Average

802.11be (EHT20) 106-tone RU - Channel 173

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3893.75	56.36 PK	74	-17.64	-45.58	-48.59	4.92	-38.90
2	3898.43	45.79 AV	54	-8.21	-57.39	-57.41	4.92	-49.47
3	#7825	54.58 PK	68.2	-13.62	-47.83	-49.57	4.92	-40.68
4	11740.62	54.82 PK	74	-19.18	-47.45	-49.53	4.92	-40.44
5	11743.75	44.08 AV	54	-9.92	-58.92	-59.3	4.92	-51.18
6	#17612.68	55.37 PK	68.2	-12.83	-49.44	-46.65	4.92	-39.89

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

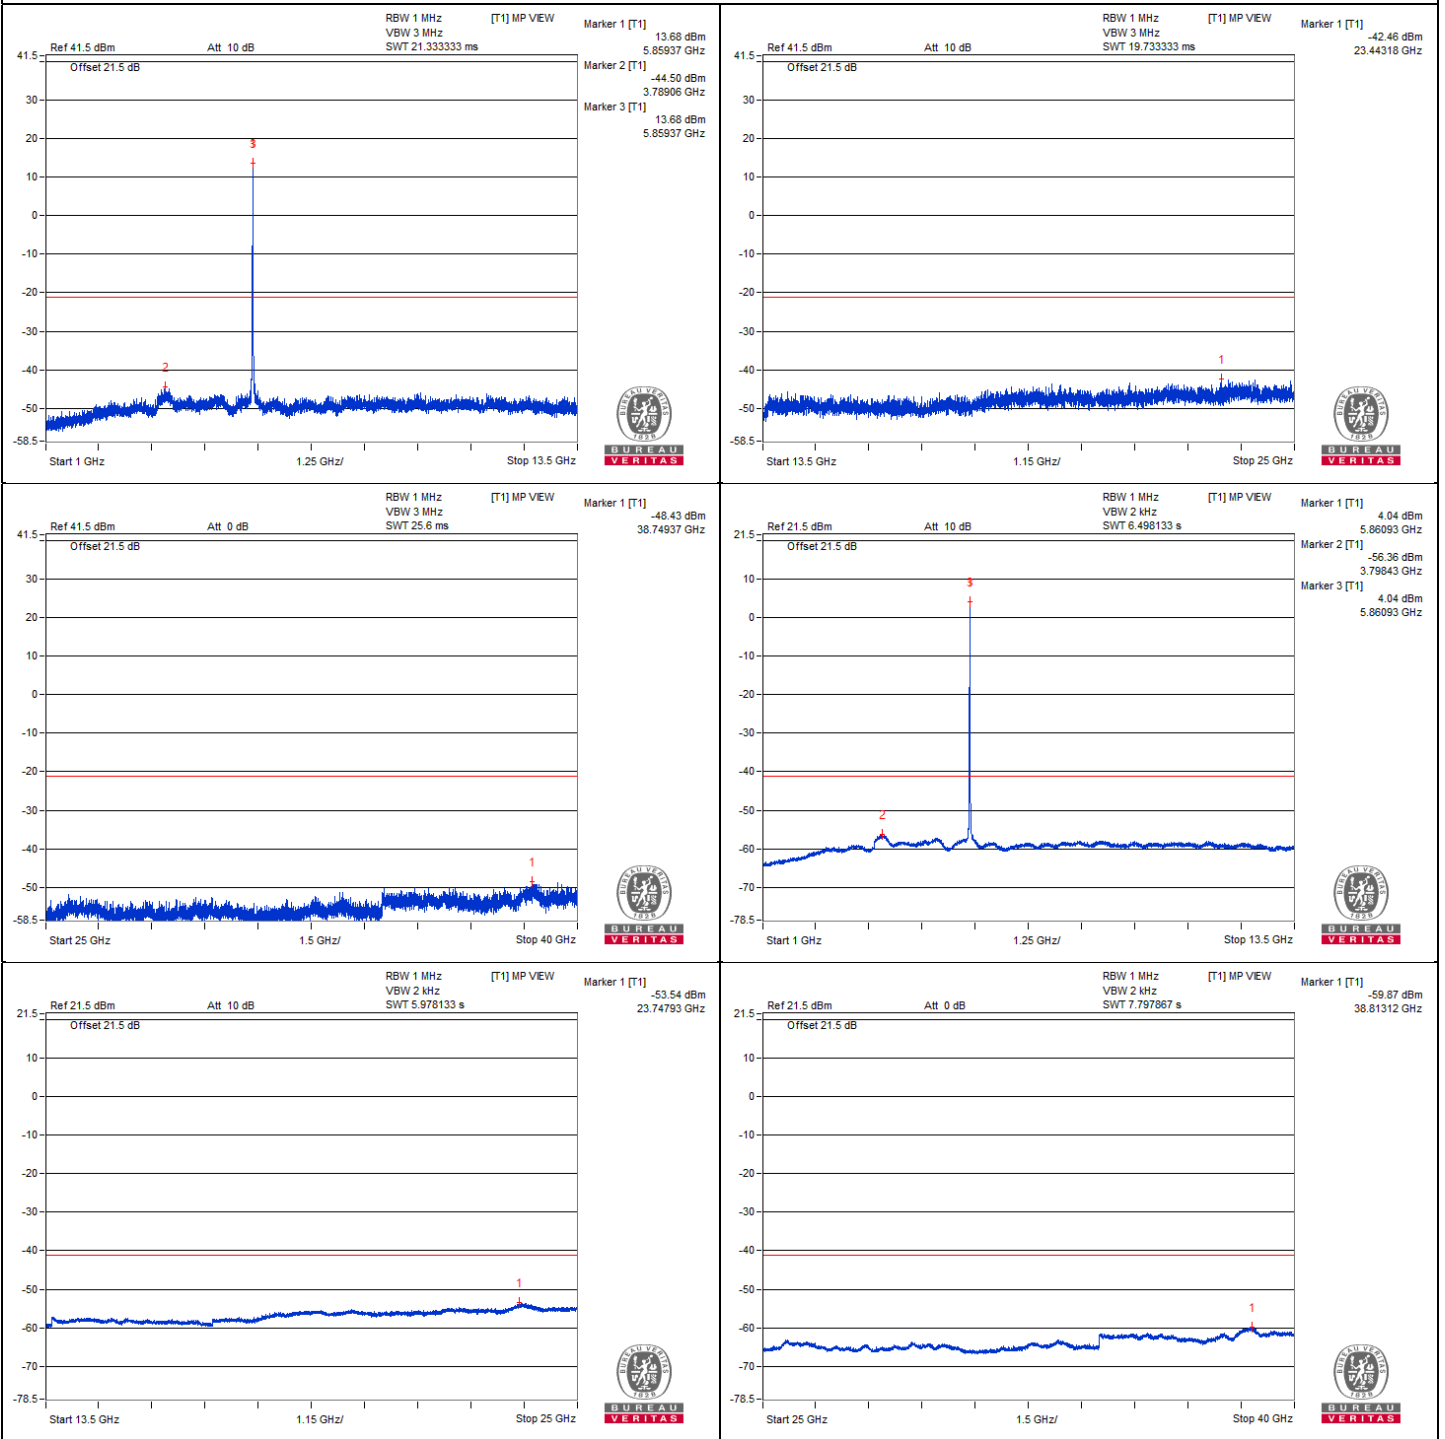





Chain 1

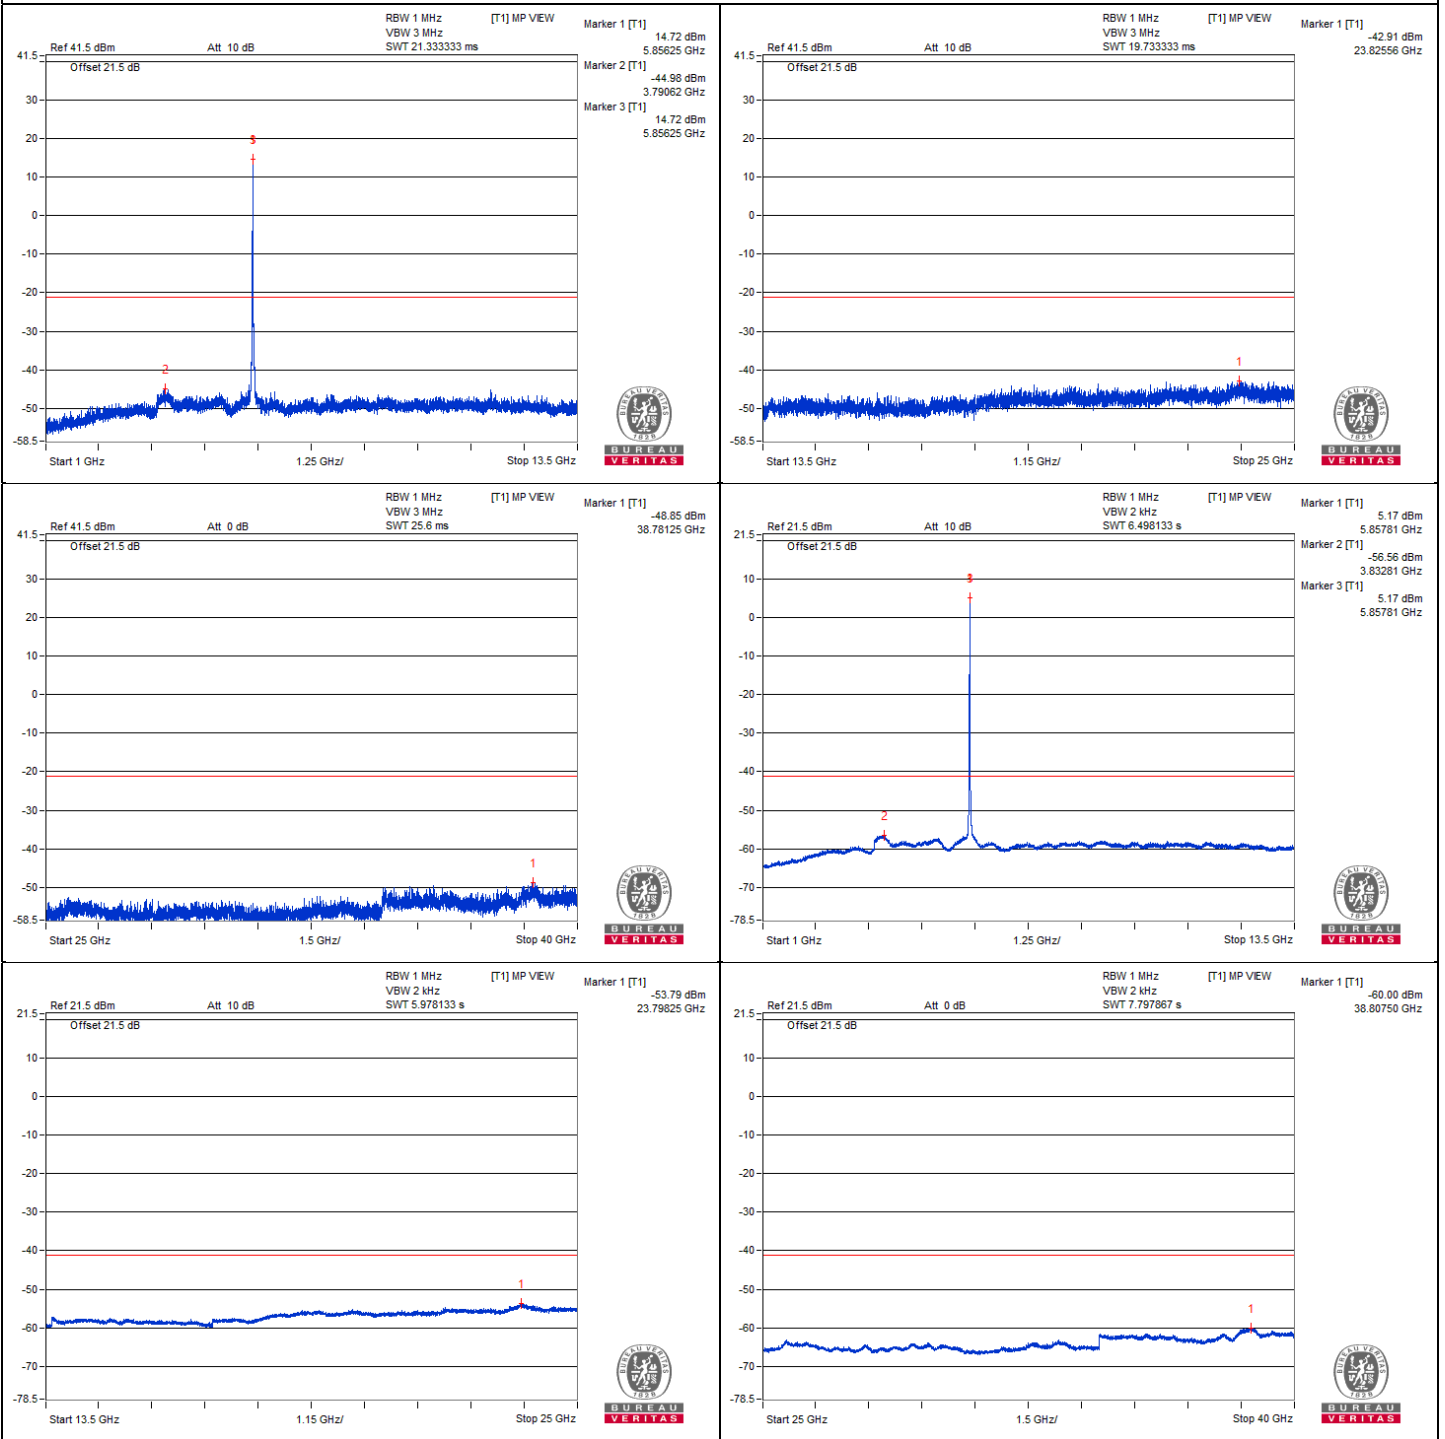





Bandedge table

Chain 0

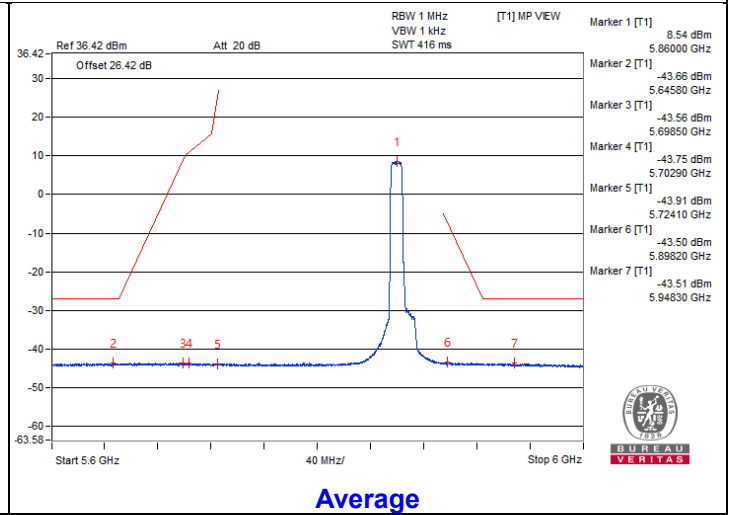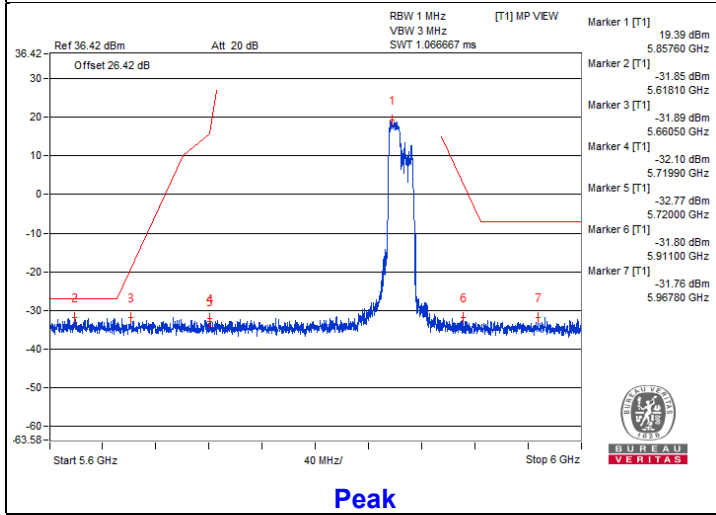

Chain 1

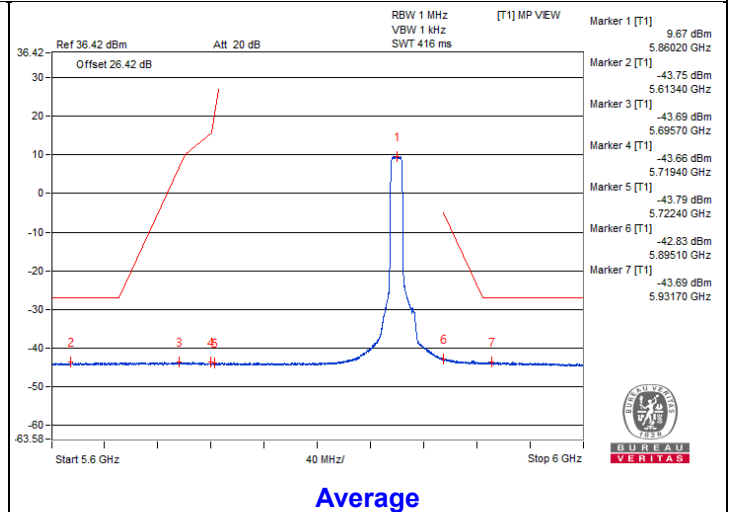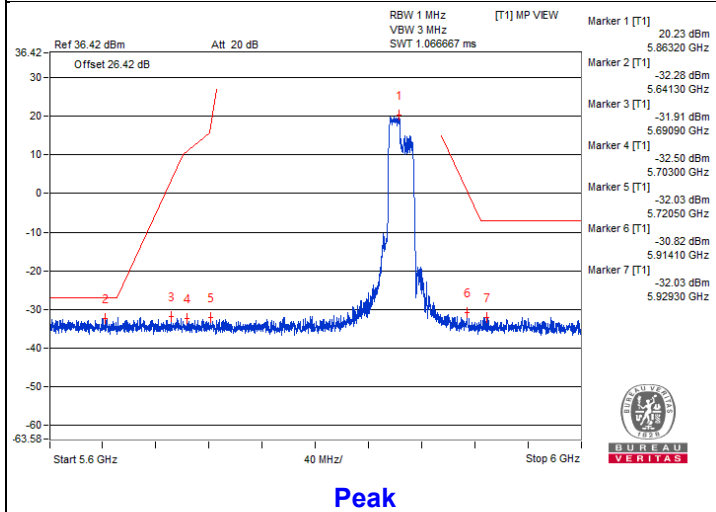

802.11be (EHT20) 106-tone RU - Channel 177

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3912.5	56.3 PK	74	-17.7	-47	-46.79	4.92	-38.96
2	3906.25	45.93 AV	54	-8.07	-57.15	-57.37	4.92	-49.33
3	#7853.12	54.83 PK	68.2	-13.37	-47.46	-49.5	4.92	-40.43
4	11779.68	55.21 PK	74	-18.79	-50.16	-46.53	4.92	-40.05
5	11770.31	44.23 AV	54	-9.77	-58.98	-58.94	4.92	-51.03
6	#17660.12	55.01 PK	68.2	-13.19	-47.62	-48.83	4.92	-40.25

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

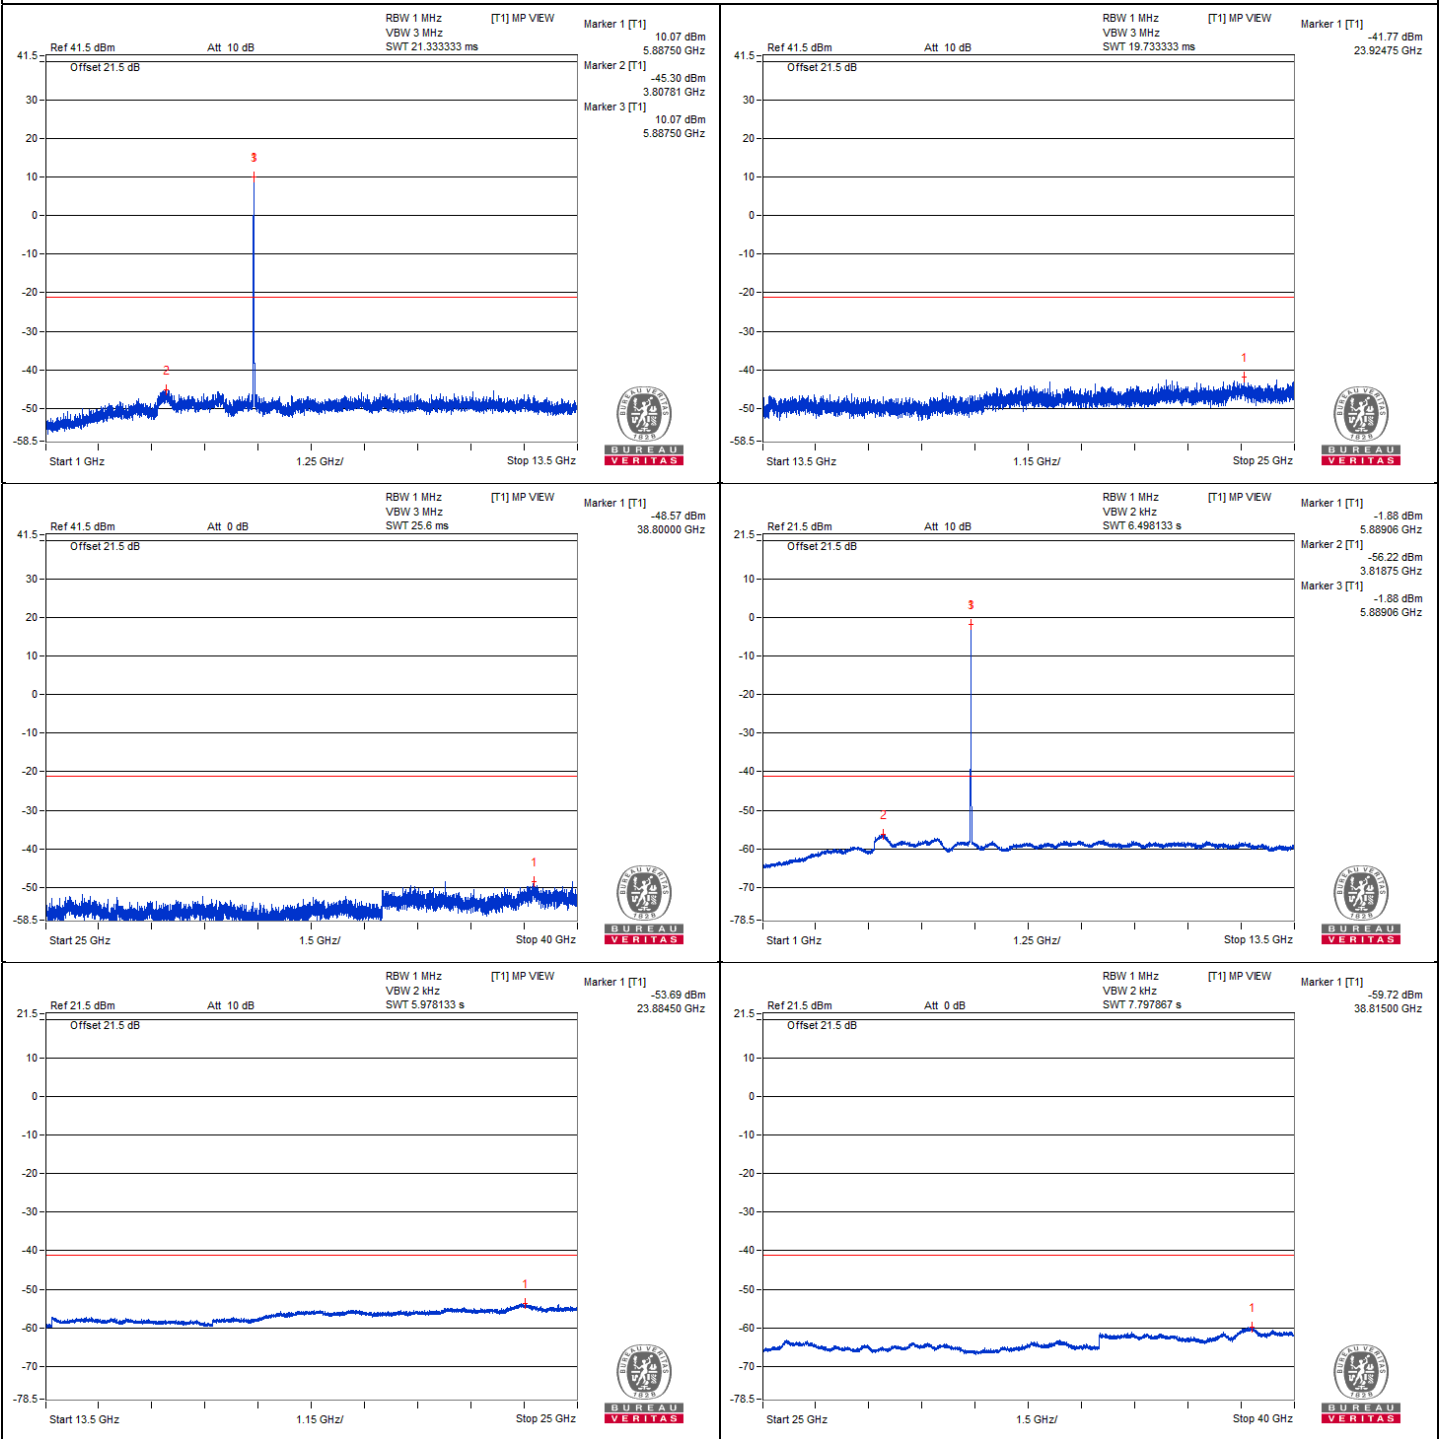





Chain 1

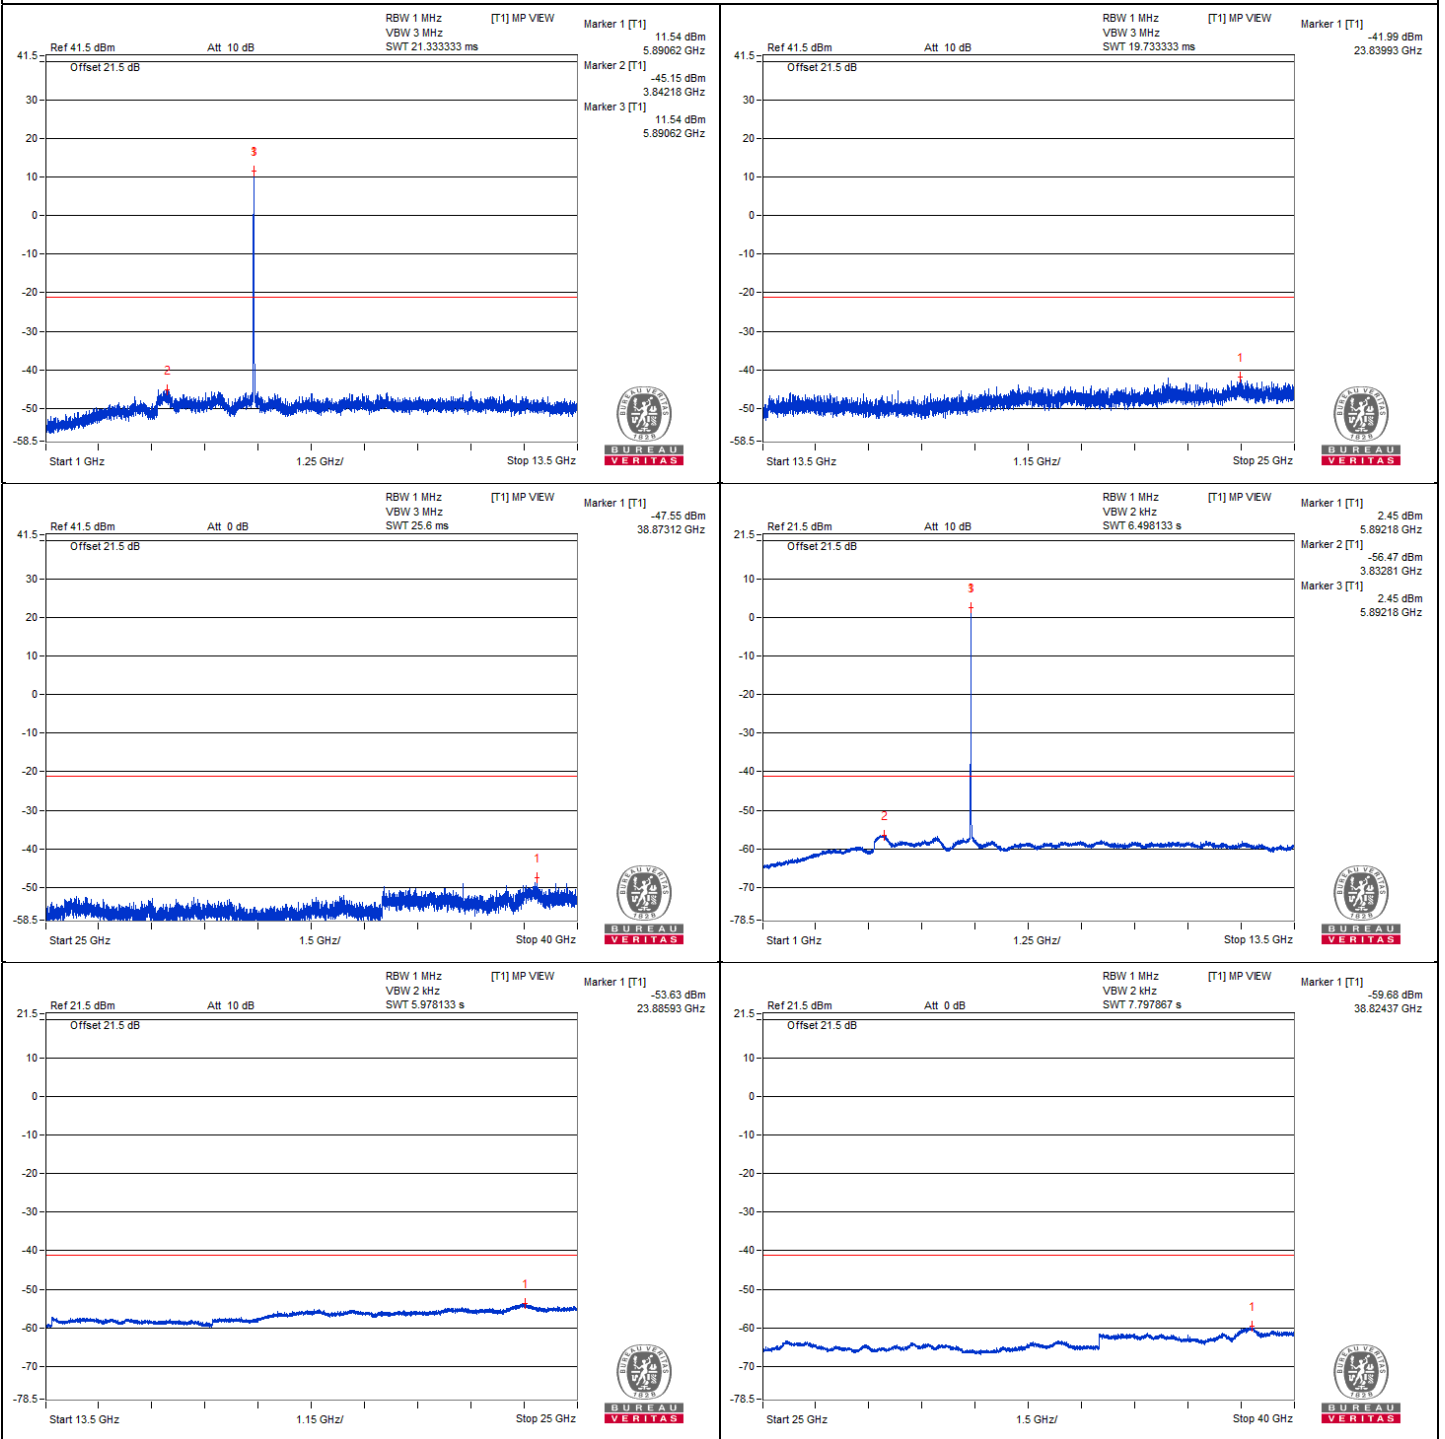





Bandedge table

Chain 0

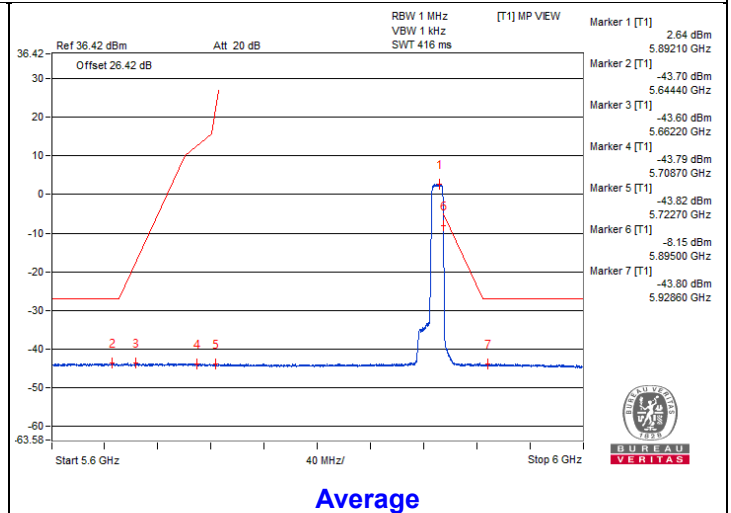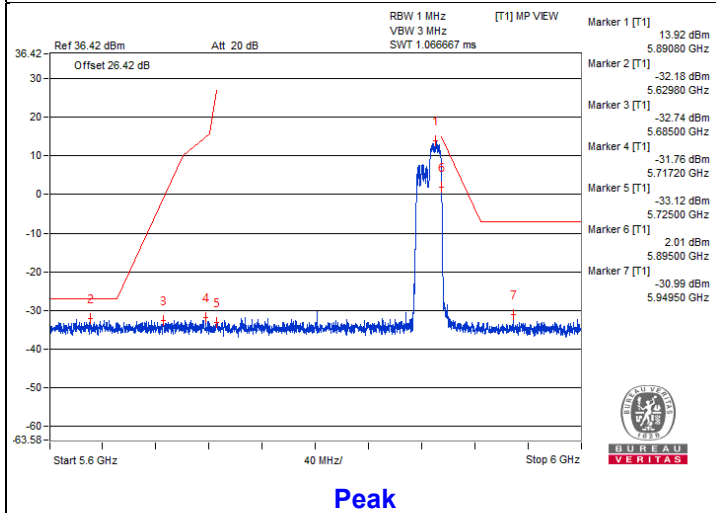

Chain 1

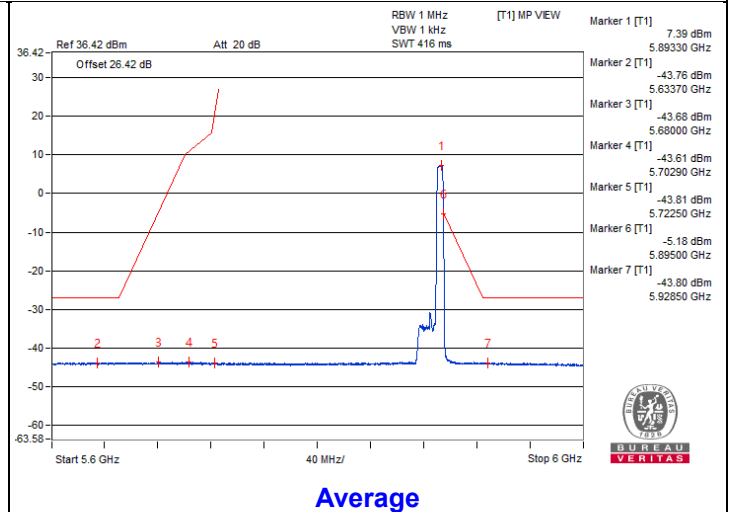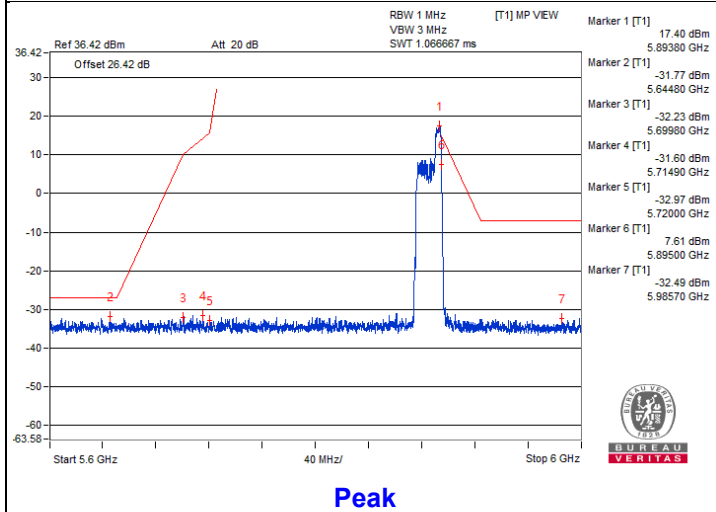

802.11be (EHT20) 52+26-tone MRU - Channel 169
Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3892.18	56.28 PK	74	-17.72	-47.27	-46.57	4.92	-38.98
2	3878.12	46.82 AV	54	-7.18	-56.6	-56.15	4.92	-48.44
3	#7789.06	55.25 PK	68.2	-12.95	-48.94	-47.12	4.92	-40.01
4	11670.31	54.78 PK	74	-19.22	-48.05	-48.81	4.92	-40.48
5	11671.87	44.81 AV	54	-9.19	-58.34	-58.43	4.92	-50.45
6	#17520.68	55.88 PK	68.2	-12.32	-47.82	-46.86	4.92	-39.38

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

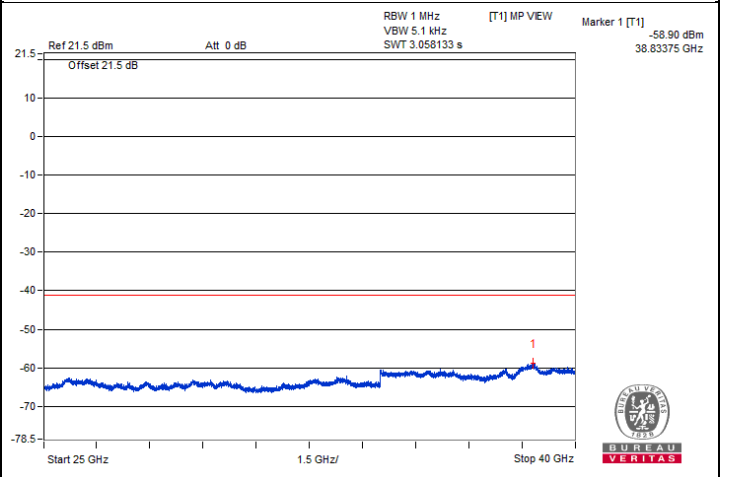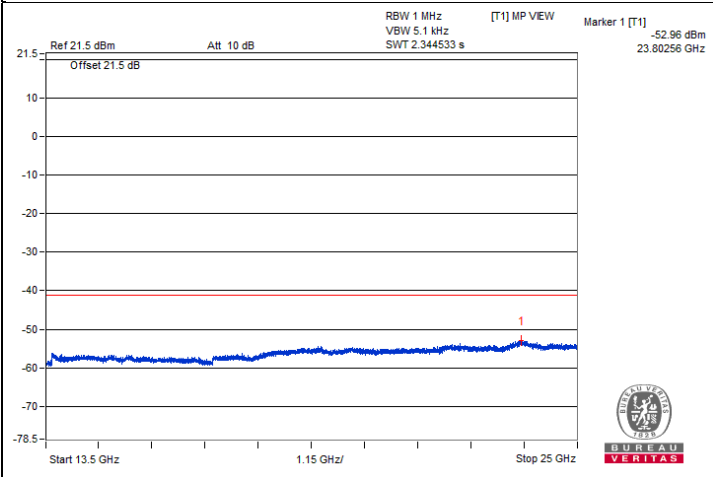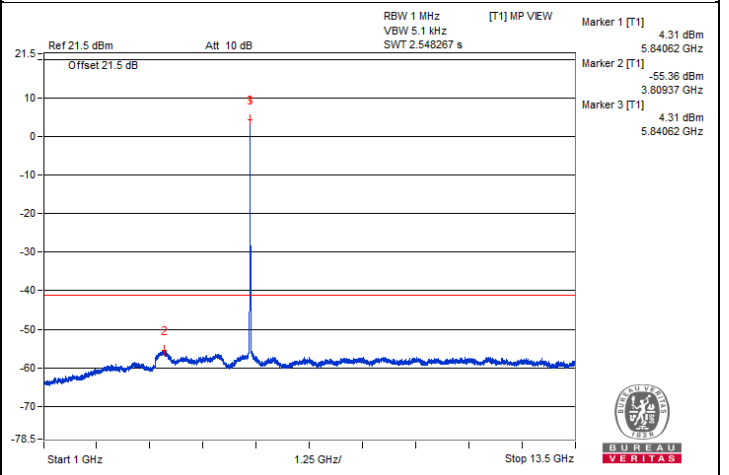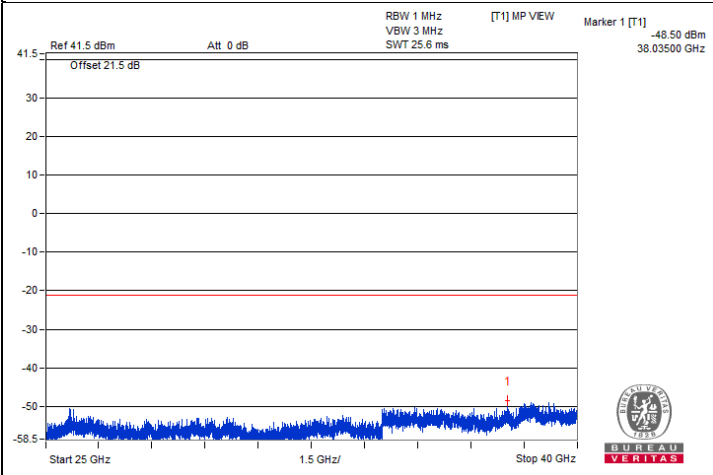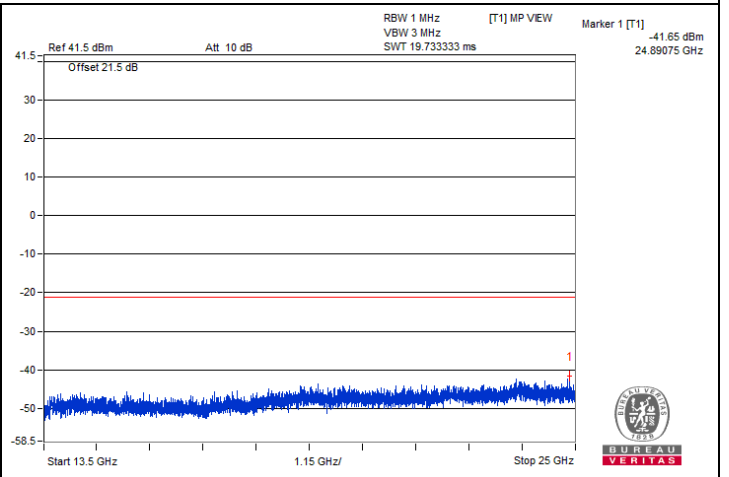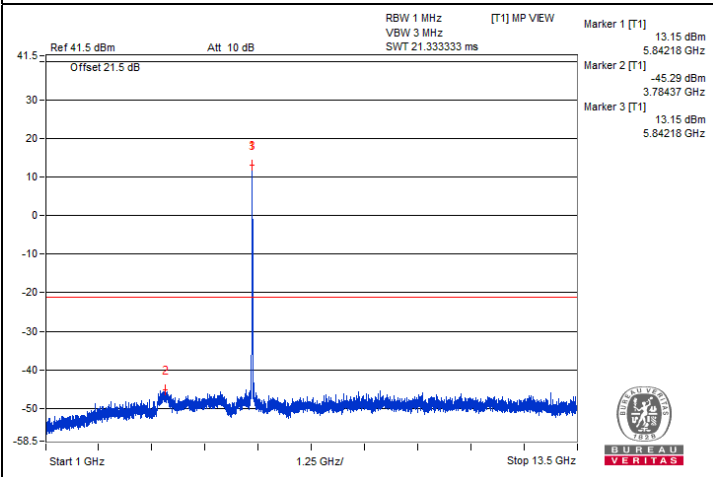





Chain 1

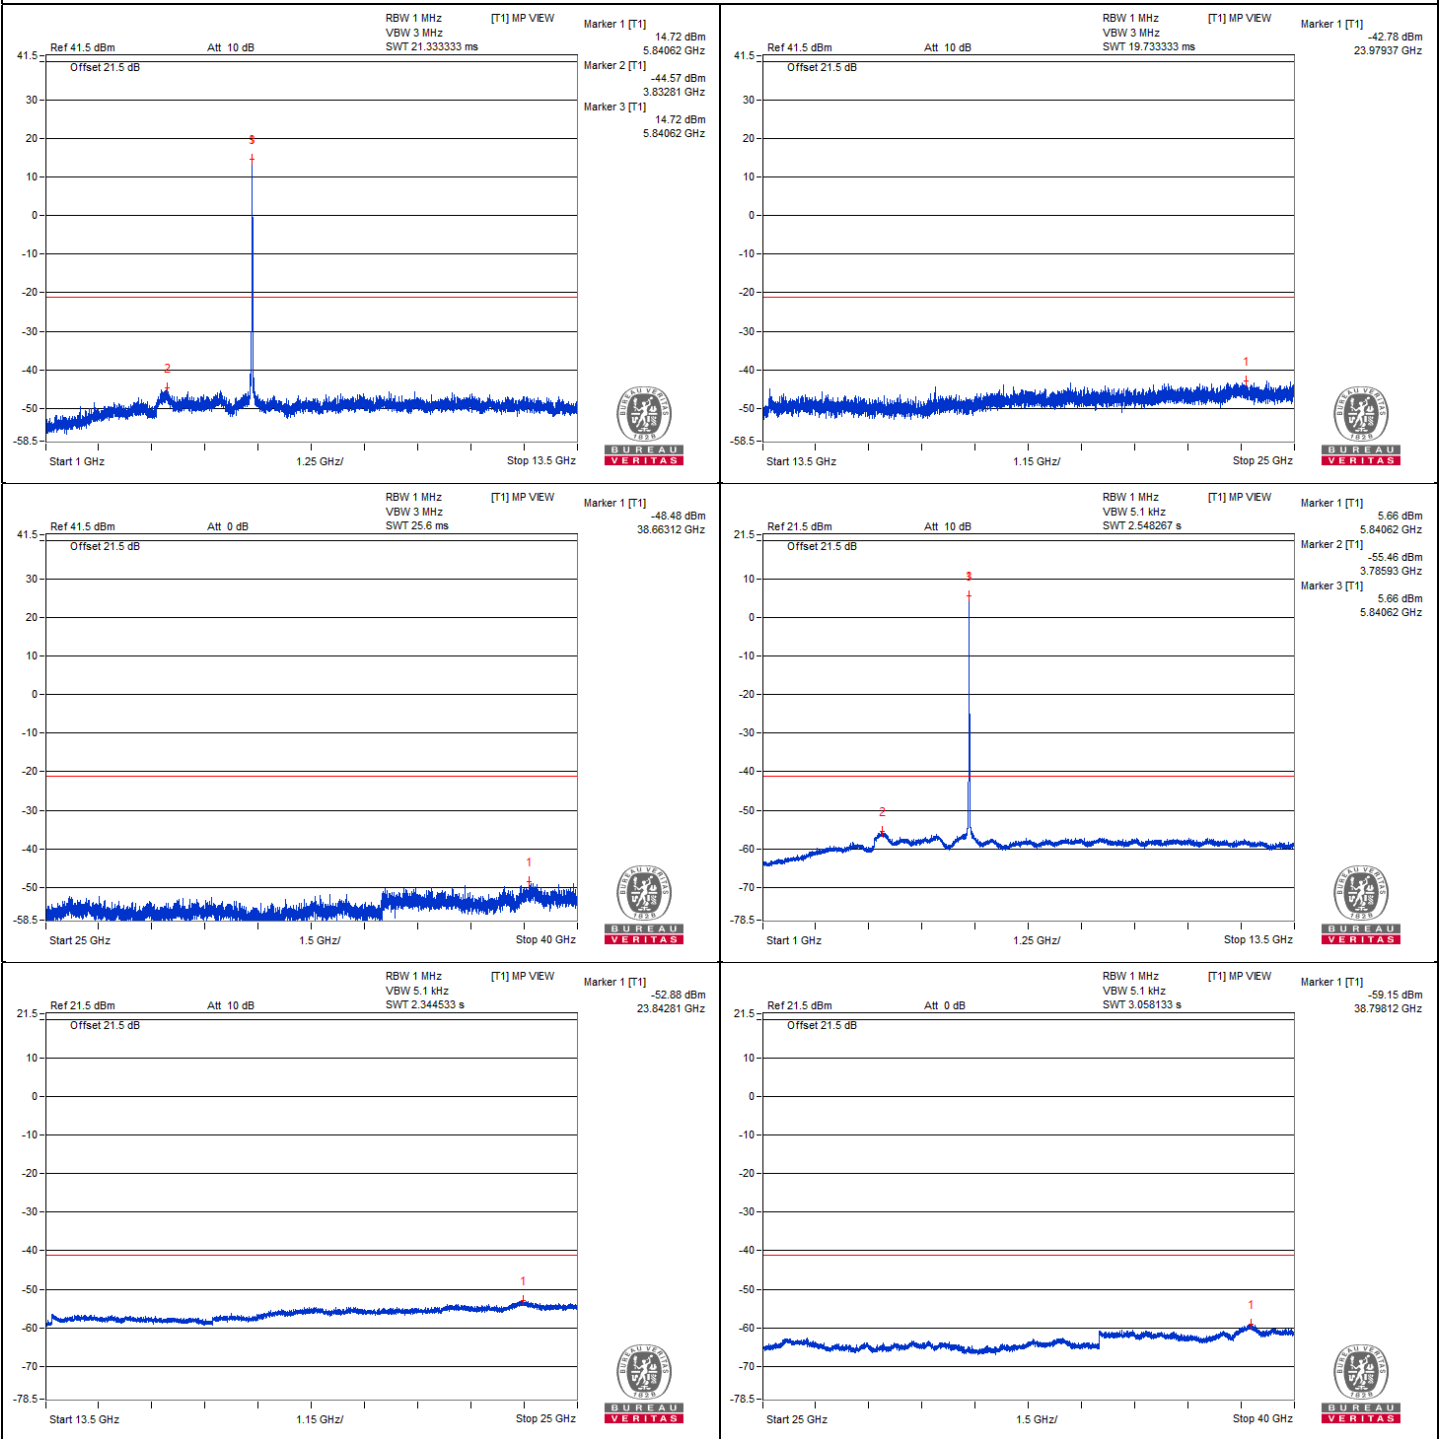





Bandedge table

Chain 0

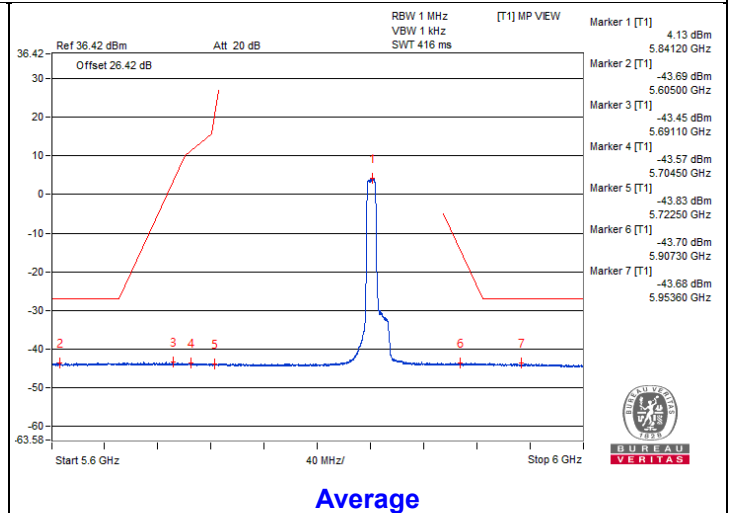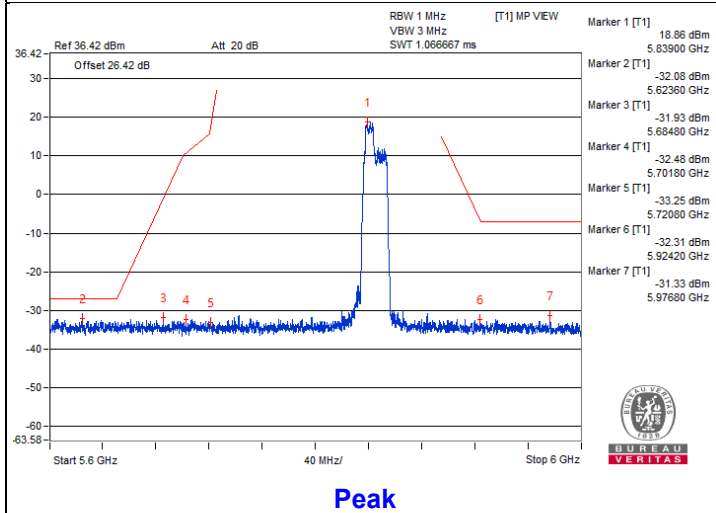

Chain 1

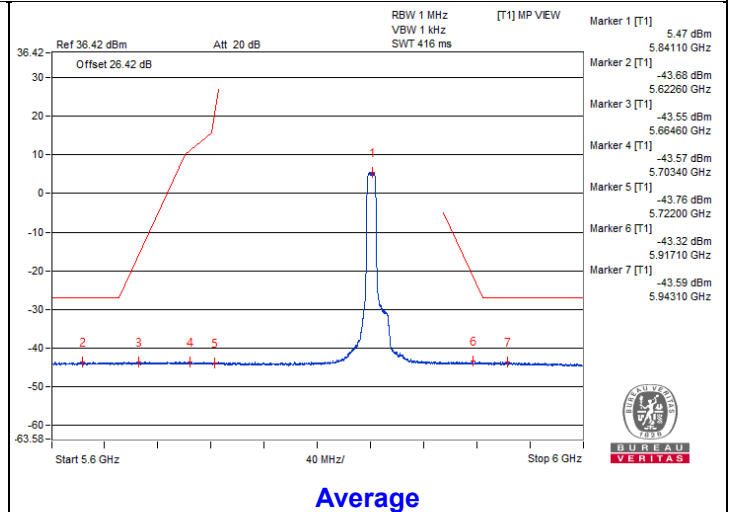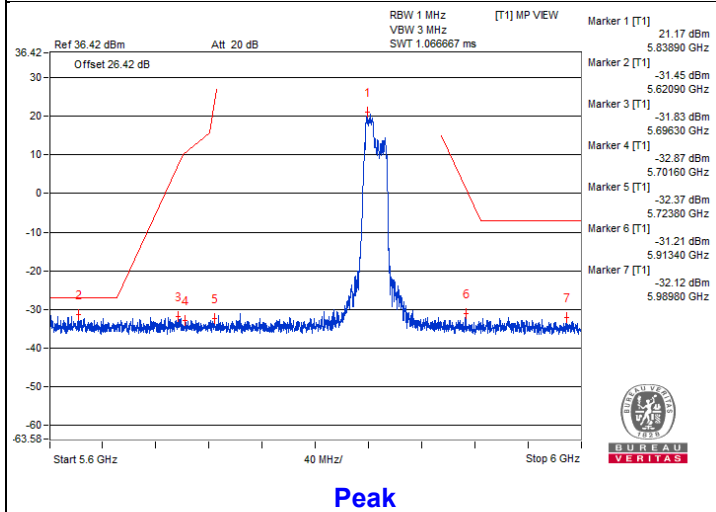

802.11be (EHT20) 52+26-tone MRU - Channel 173

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3895.31	56.92 PK	74	-17.08	-47.3	-45.44	4.92	-38.34
2	3892.18	46.78 AV	54	-7.22	-56.23	-56.59	4.92	-48.48
3	#7834.37	54.82 PK	68.2	-13.38	-47.15	-50.07	4.92	-40.44
4	11734.37	55.23 PK	74	-18.77	-46.81	-49.54	4.92	-40.03
5	11720.31	44.78 AV	54	-9.22	-58.6	-58.22	4.92	-50.48
6	#17588.25	56.1 PK	68.2	-12.1	-48.77	-45.88	4.92	-39.16

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

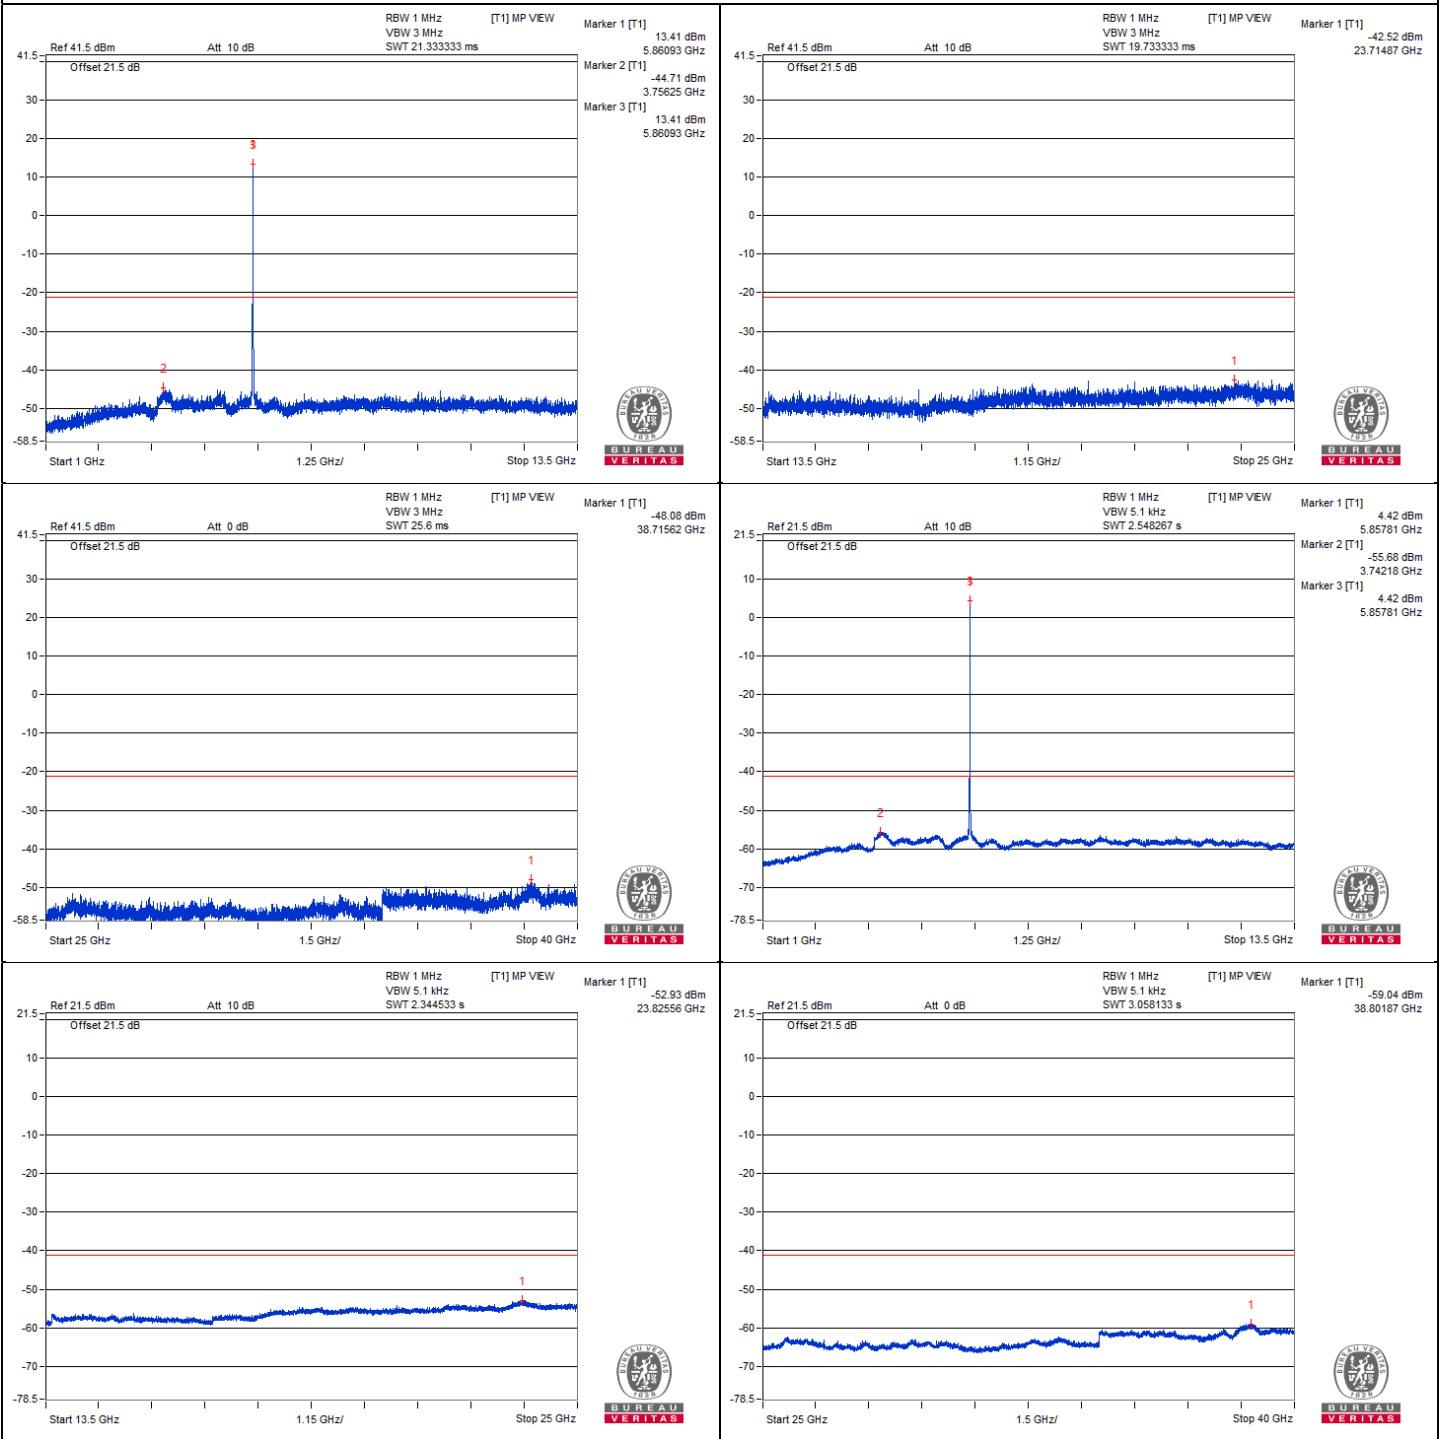




Chain 1

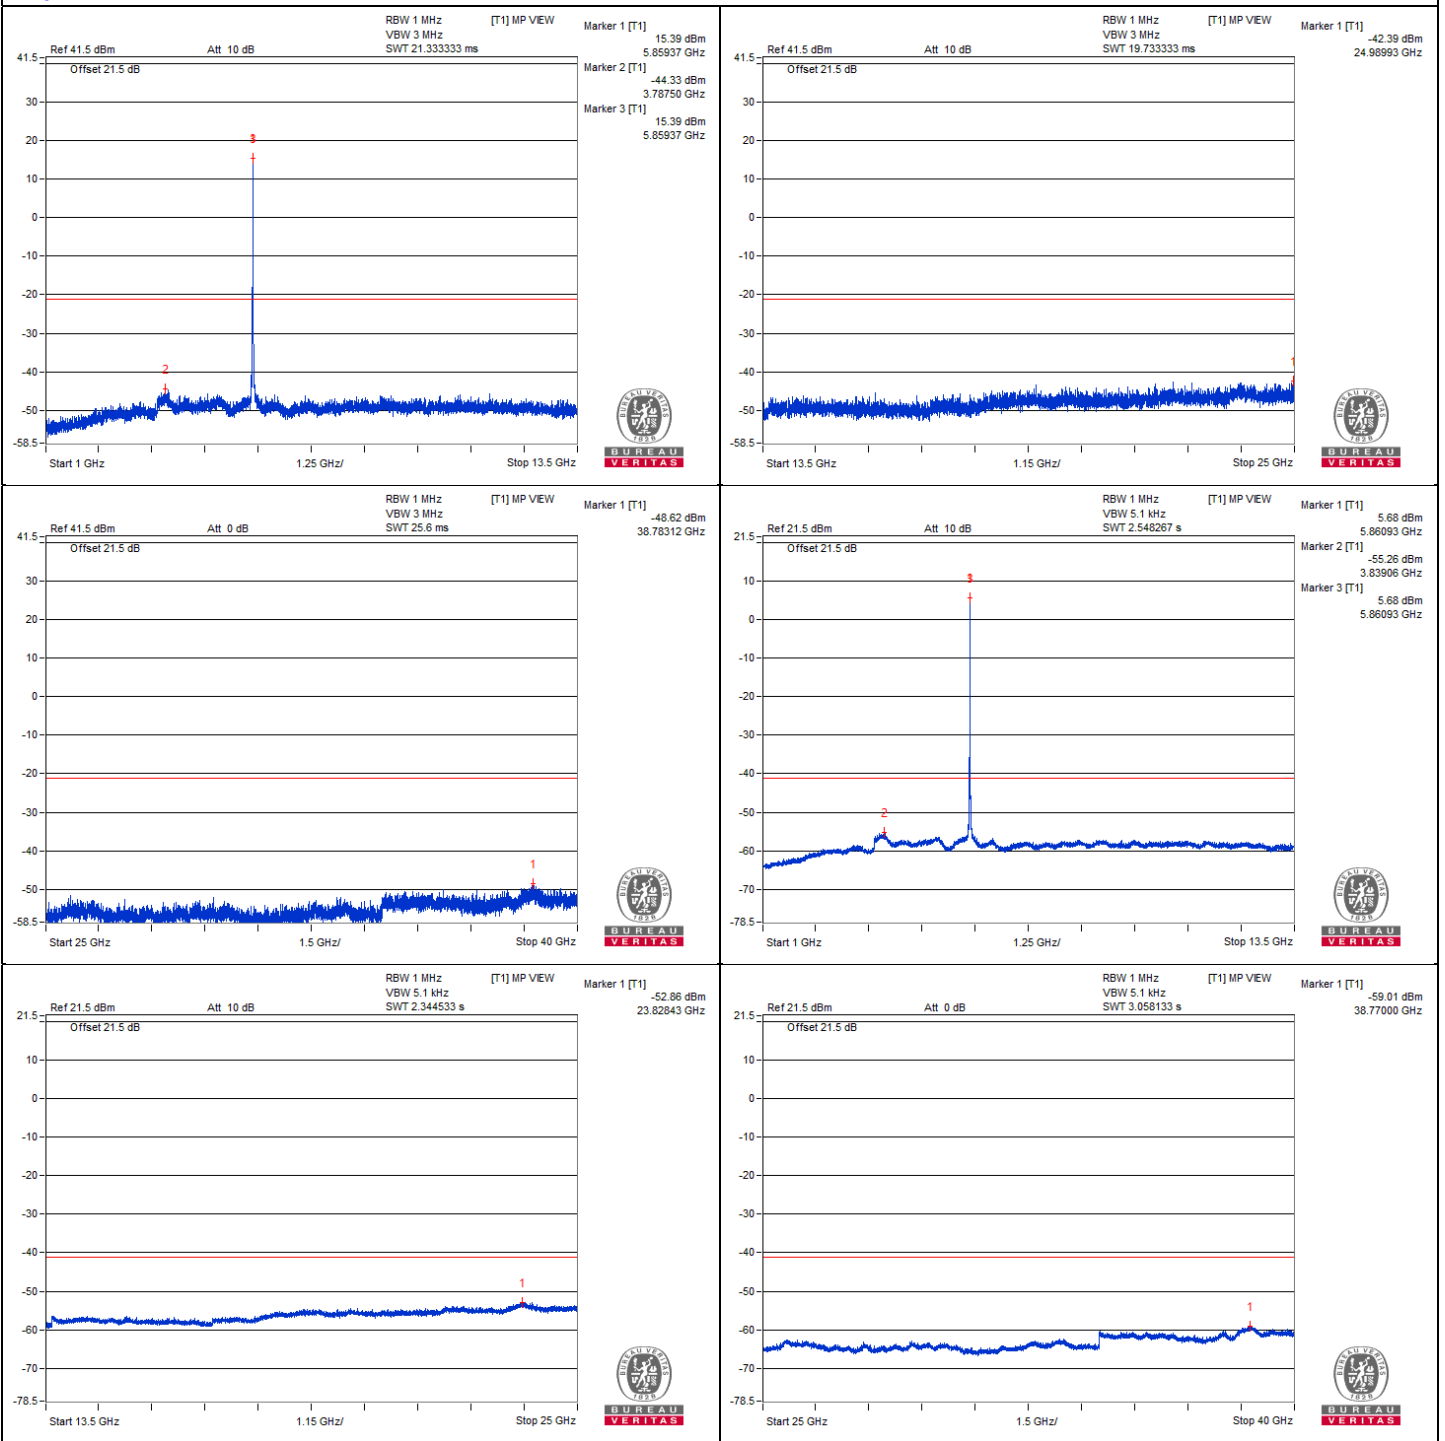




Bandedge table

Chain 0

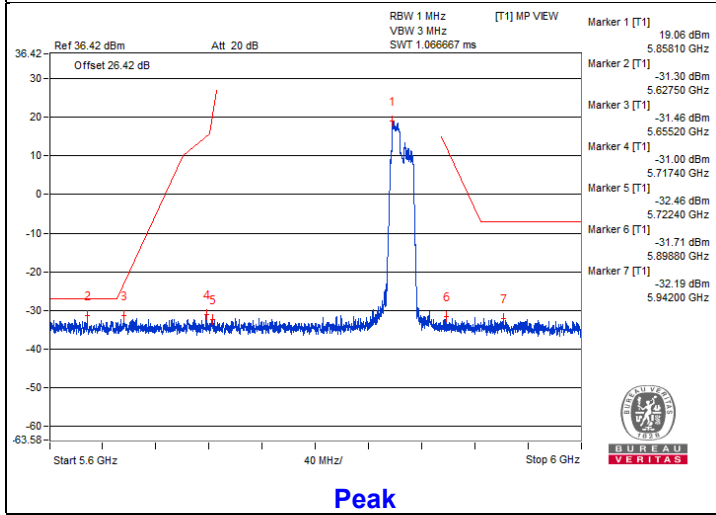


Peak

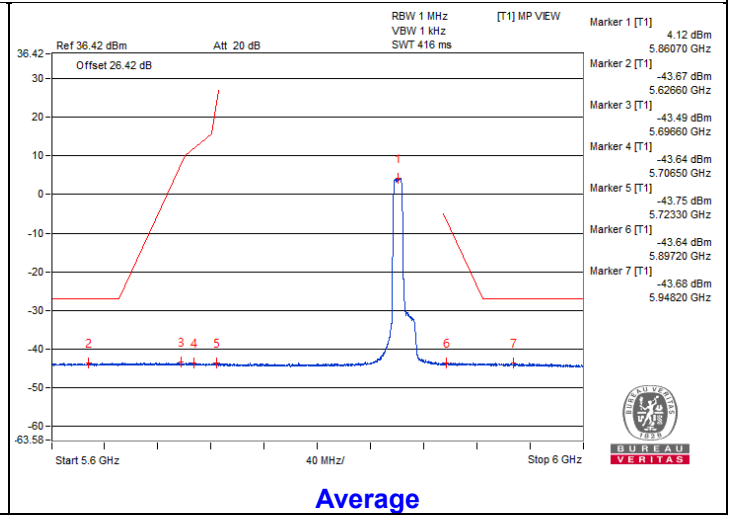


Average

Chain 1

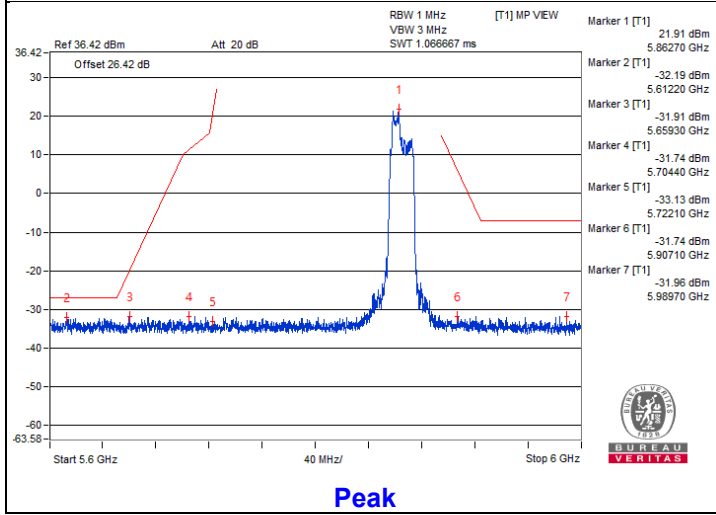

Peak

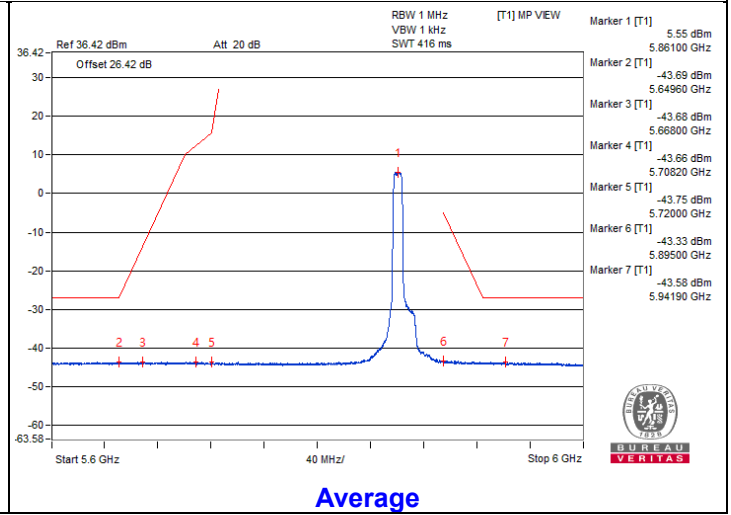

Average

802.11be (EHT20) 52+26-tone MRU - Channel 177
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3929.68	56.28 PK	74	-17.72	-46.01	-48.04	4.92	-38.98
2	3914.68	46.75 AV	54	-7.25	-56.75	-56.16	4.92	-48.51
3	#7828.12	55.01 PK	68.2	-13.19	-47.66	-48.77	4.92	-40.25
4	11767.18	55.5 PK	74	-18.5	-47.19	-48.25	4.92	-39.76
5	11776.56	44.96 AV	54	-9.04	-58.48	-57.99	4.92	-50.30
6	#17644.31	54.98 PK	68.2	-13.22	-48.8	-47.69	4.92	-40.28

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

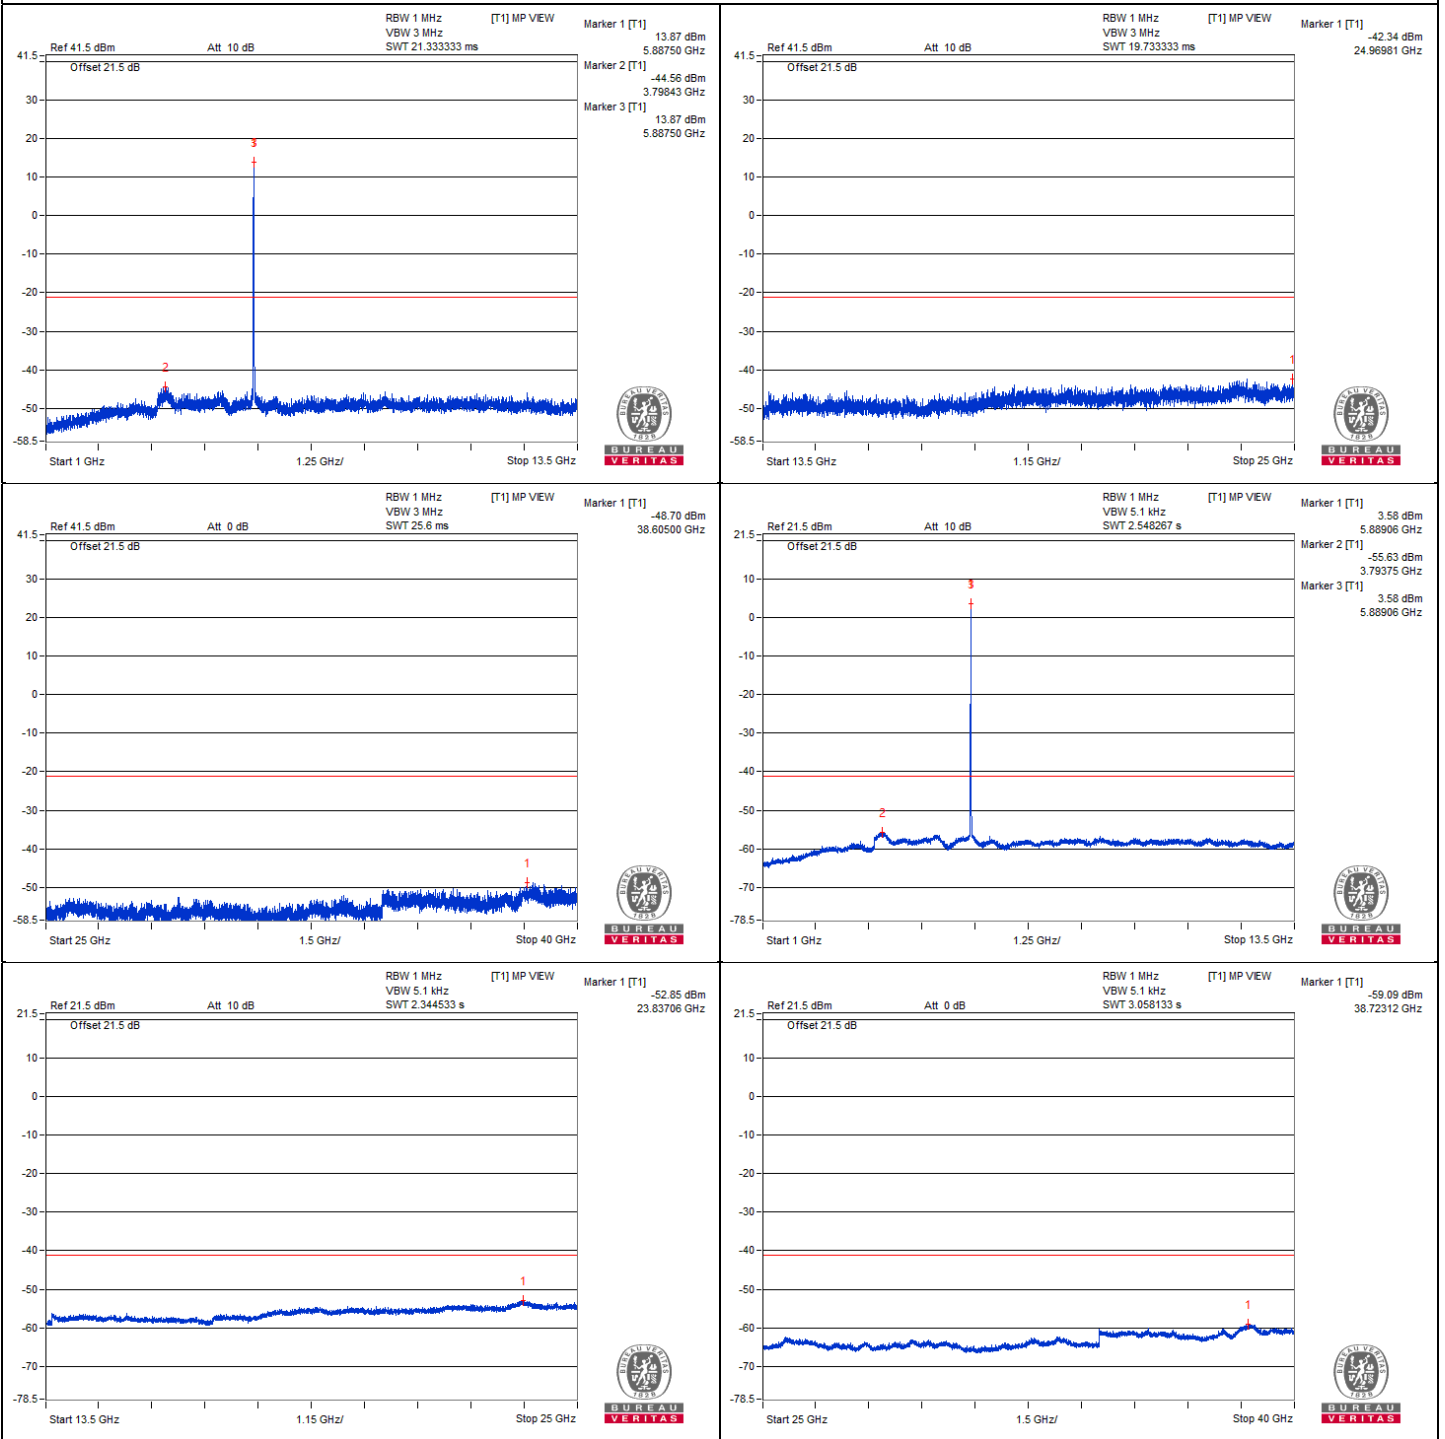





Chain 1

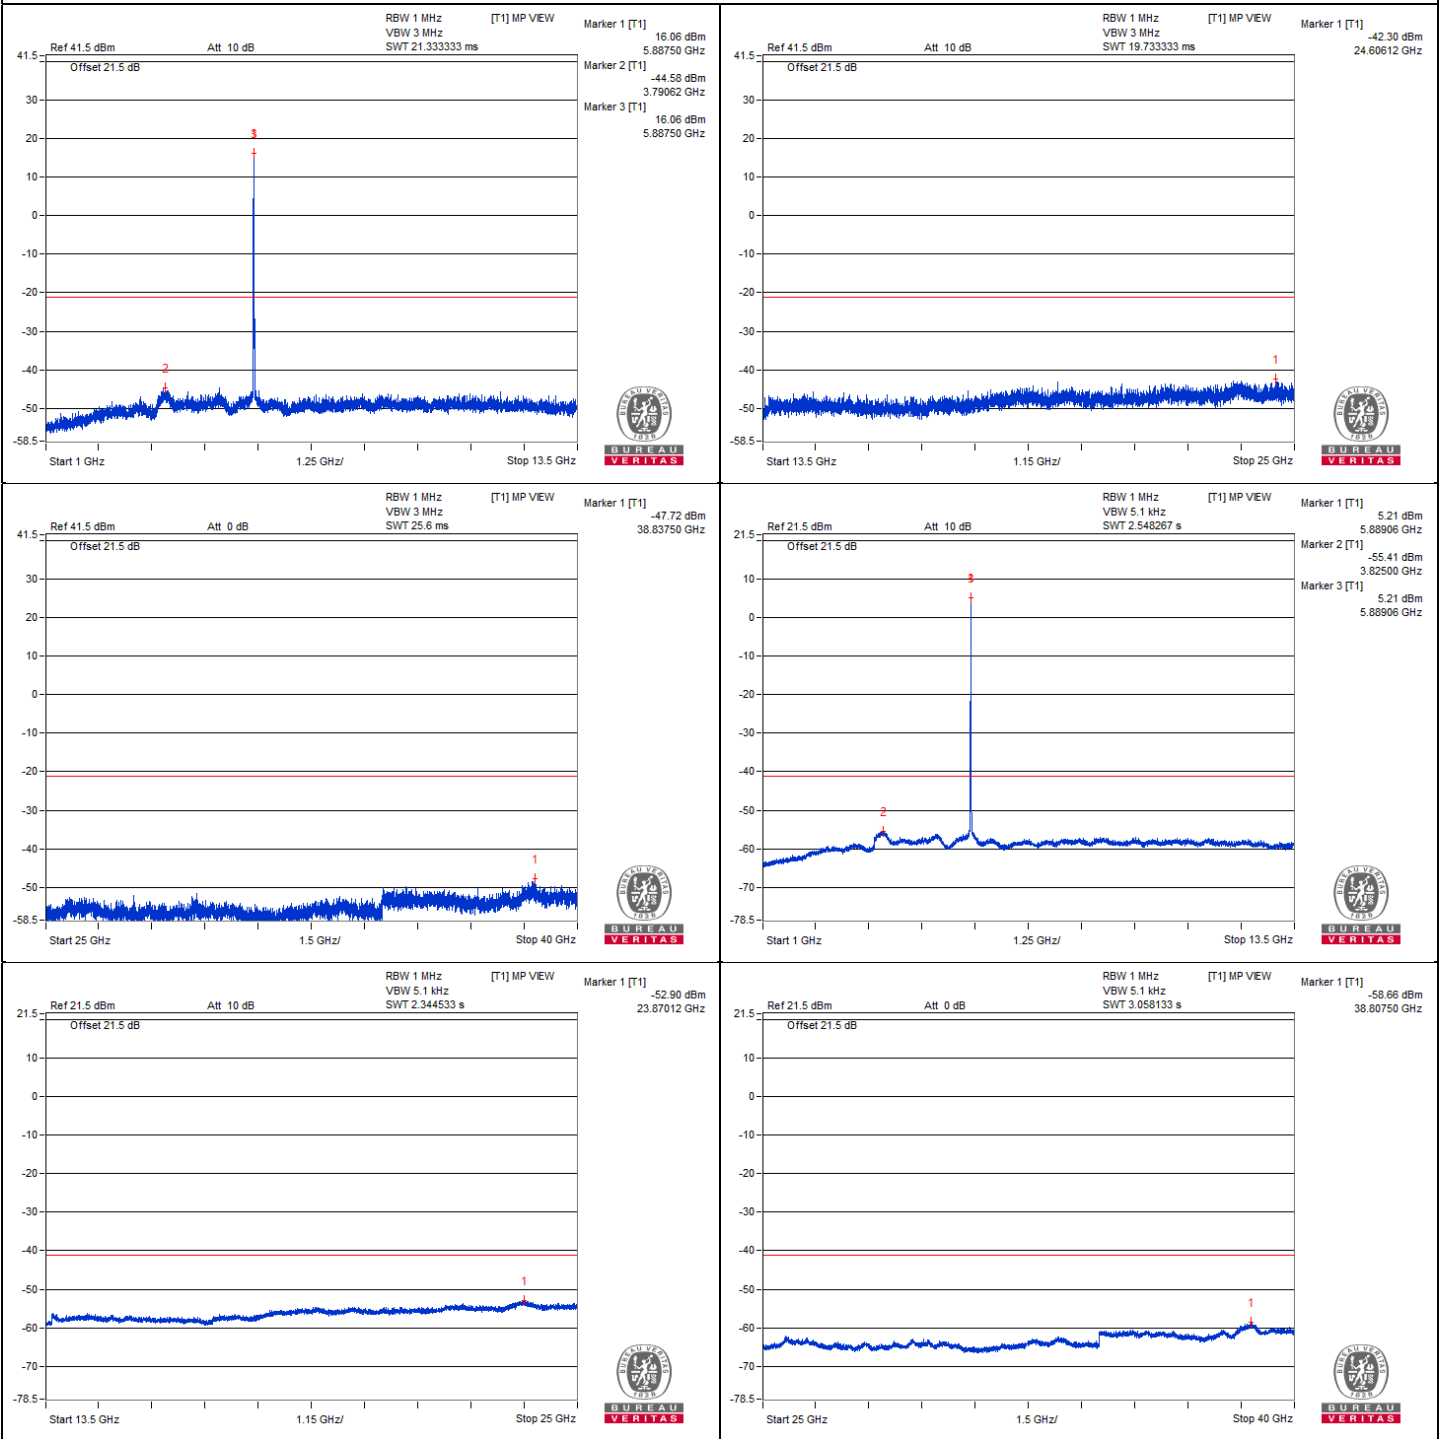





Bandedge table

Chain 0

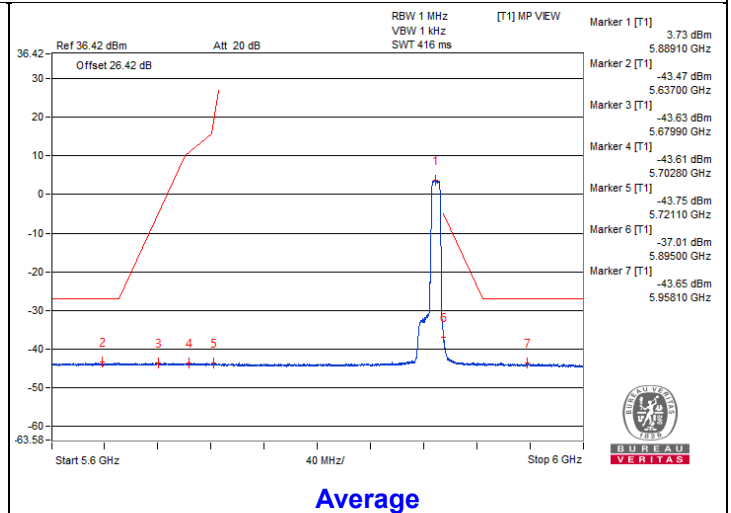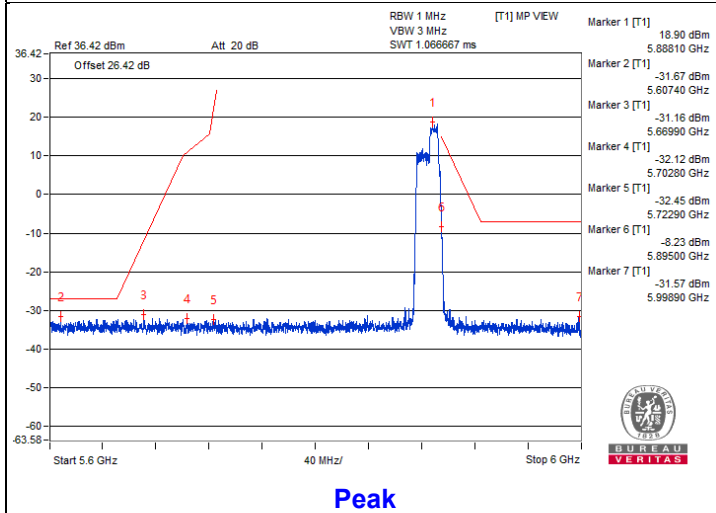

Chain 1

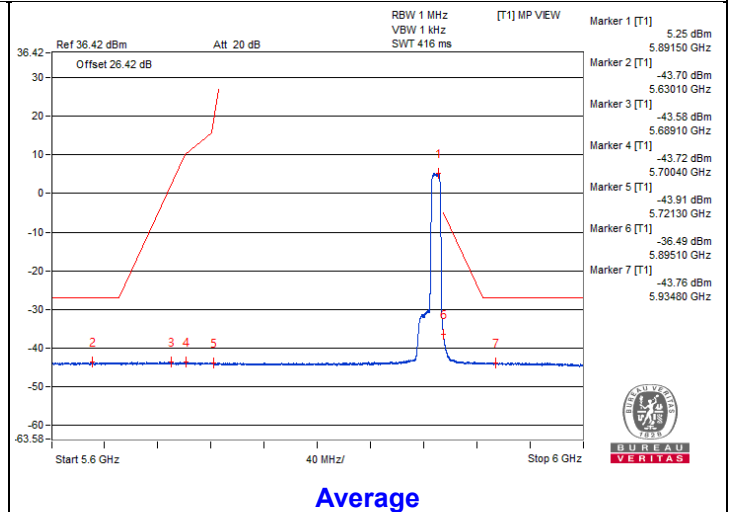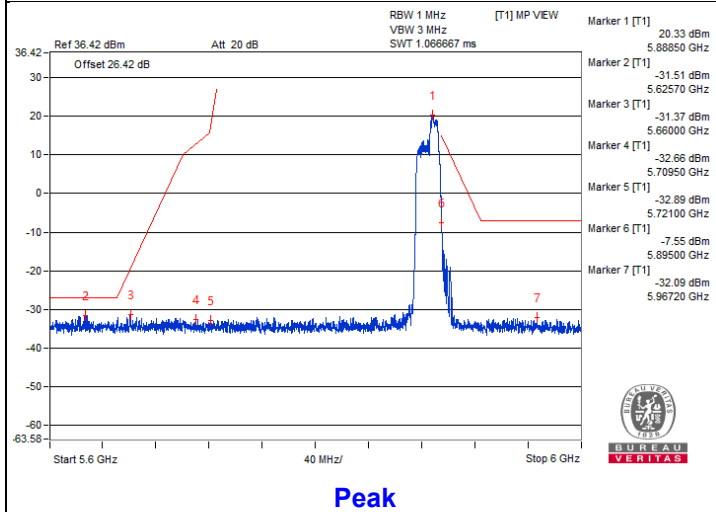

802.11be (EHT20) 106+26-tone MRU - Channel 169

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3914.06	56.29 PK	74	-17.71	-46.97	-46.84	4.92	-38.97
2	3901.25	46.9 AV	54	-7.1	-56.12	-56.46	4.92	-48.36
3	#7793.75	54.87 PK	68.2	-13.33	-48.8	-47.89	4.92	-40.39
4	11693.33	54.86 PK	74	-19.14	-49.4	-47.47	4.92	-40.40
5	11700	44.87 AV	54	-9.13	-58.8	-57.89	4.92	-50.39
6	#17535.06	55.72 PK	68.2	-12.48	-48.44	-46.67	4.92	-39.54

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

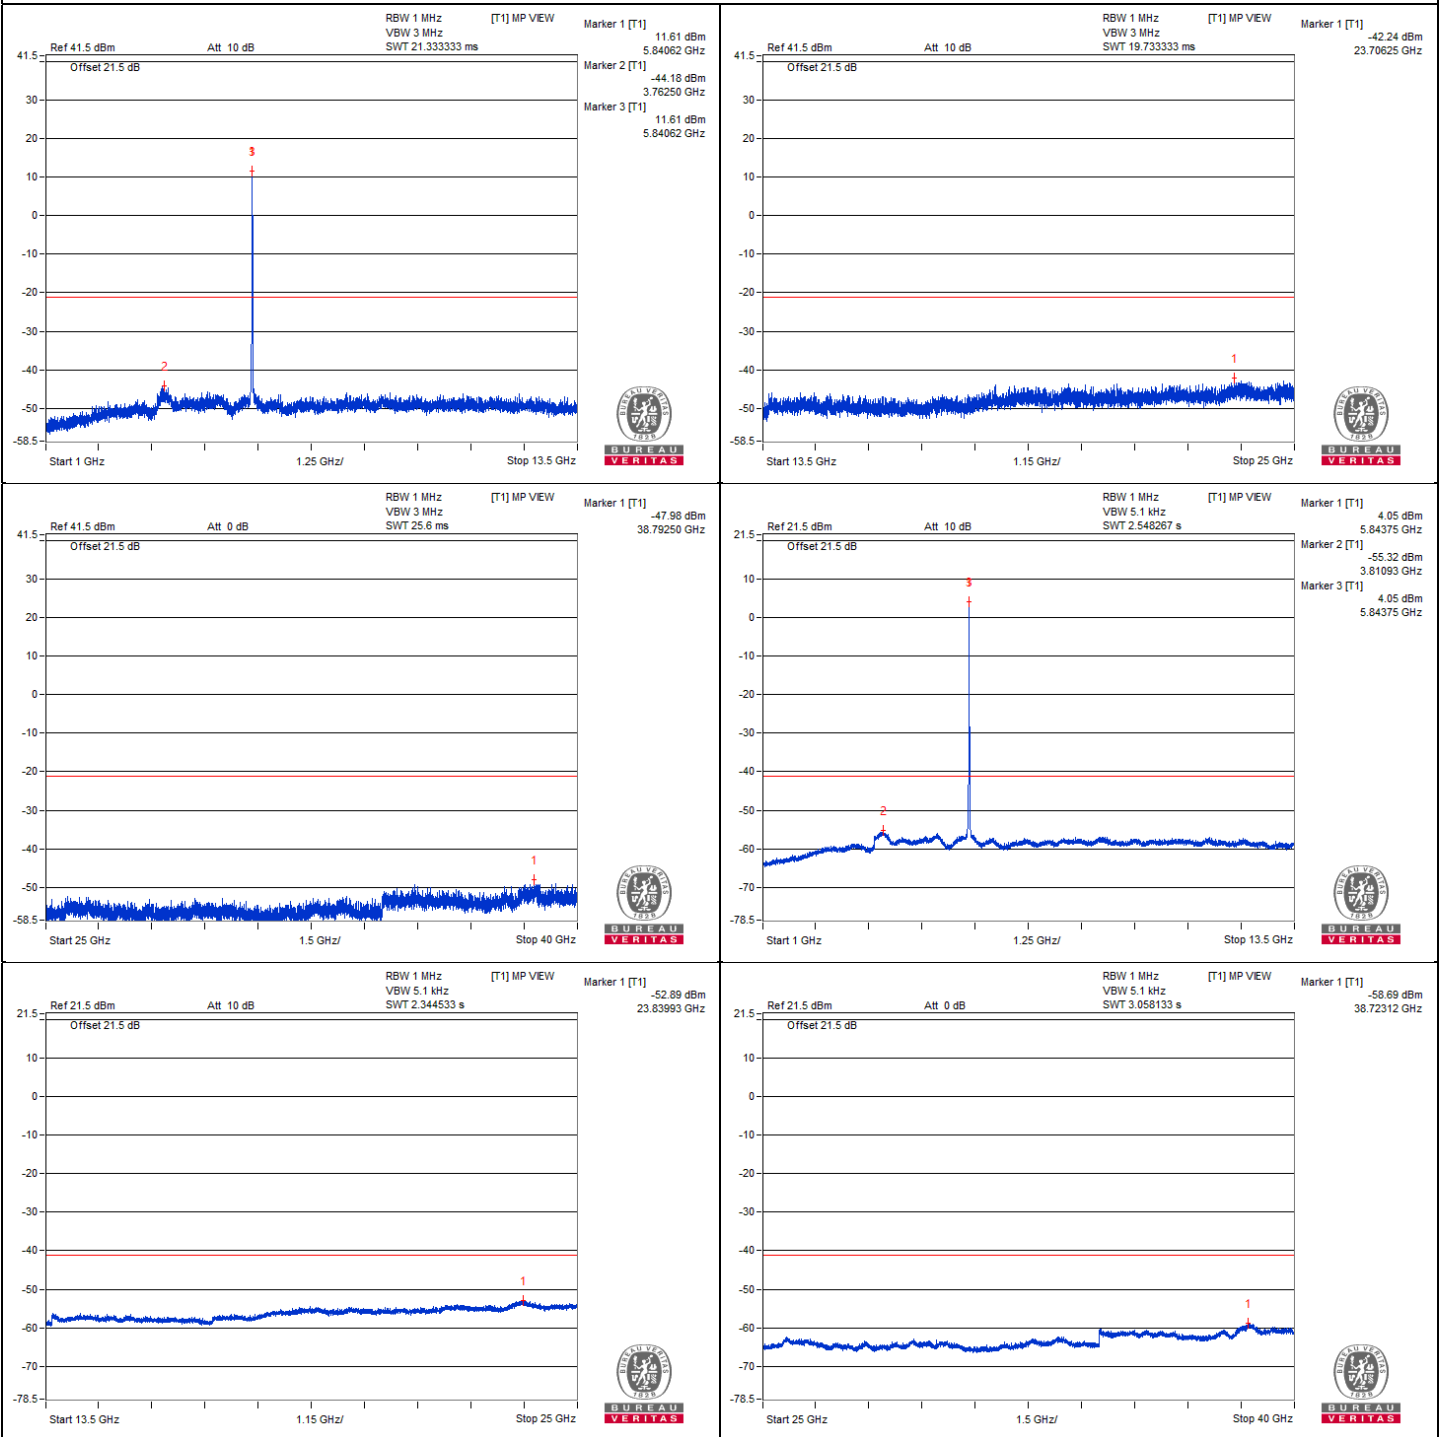





Chain 1

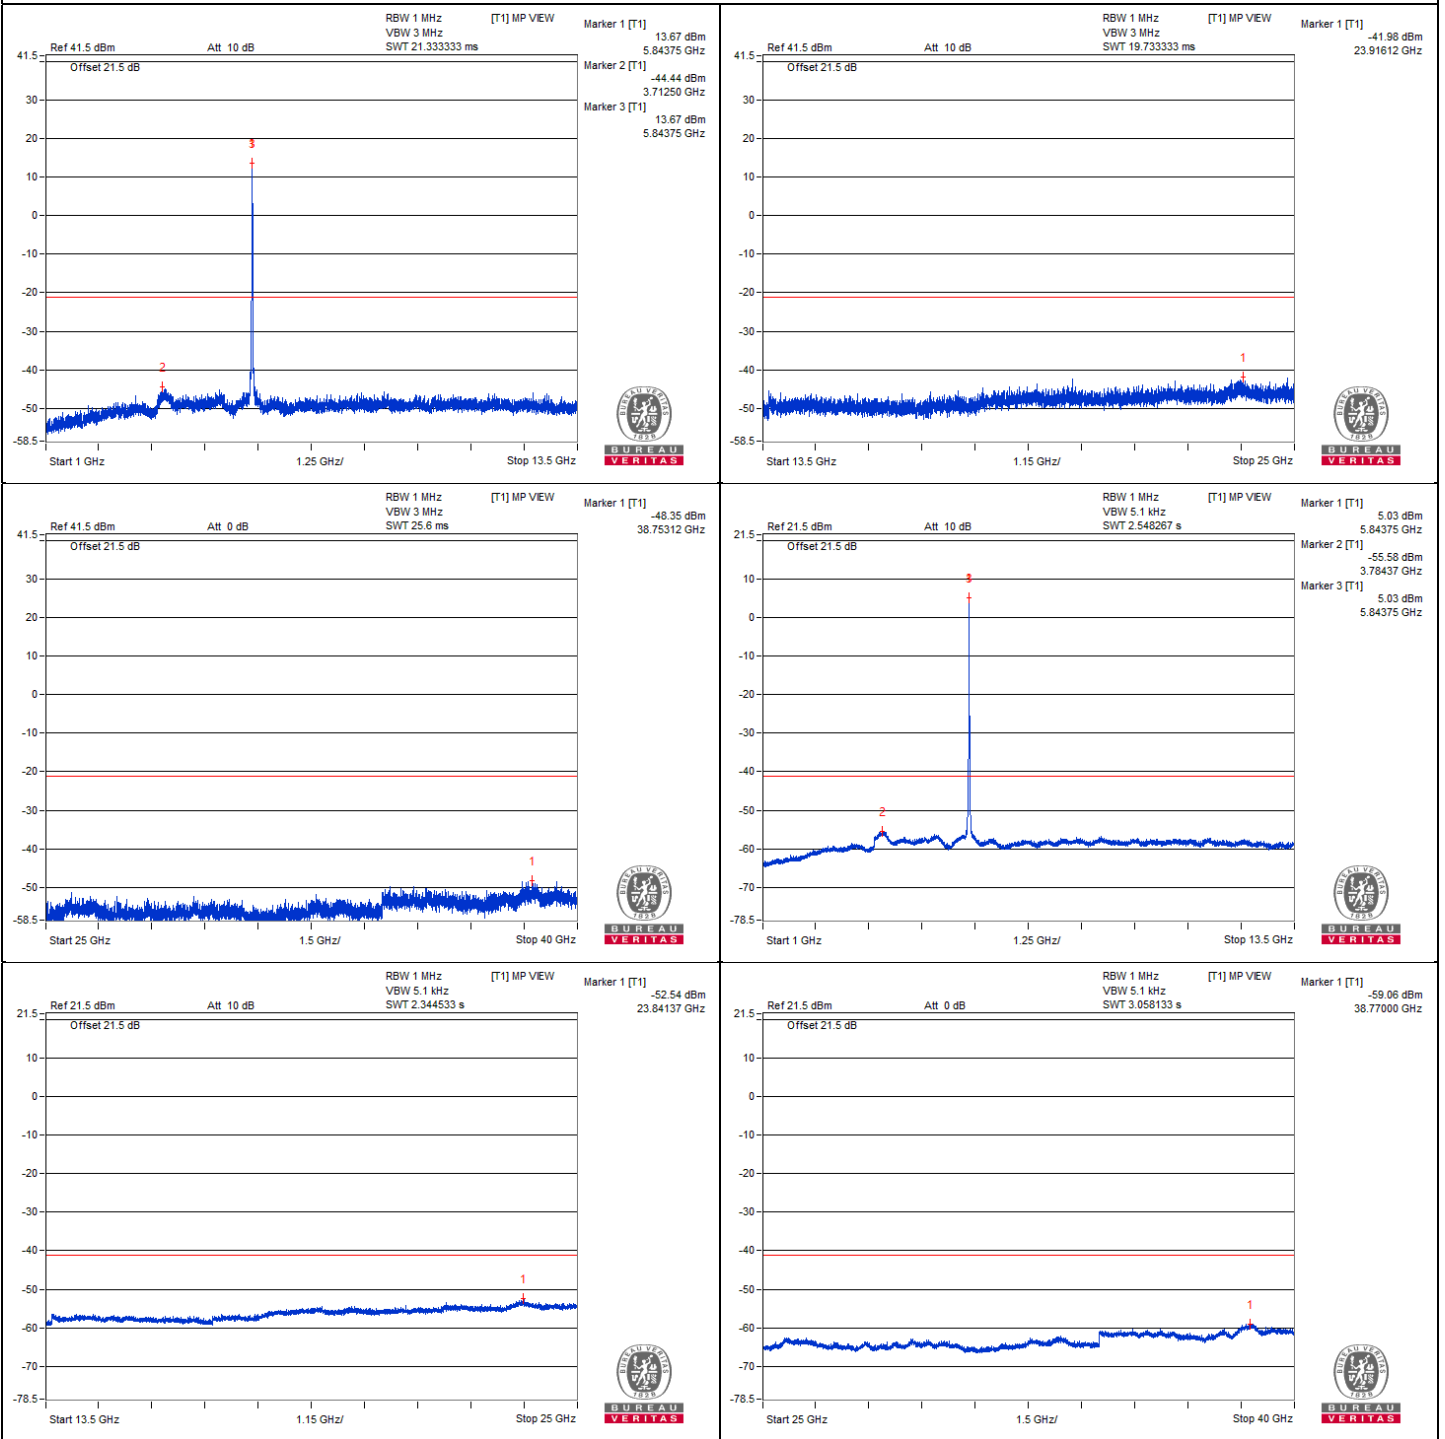





Bandedge table

Chain 0

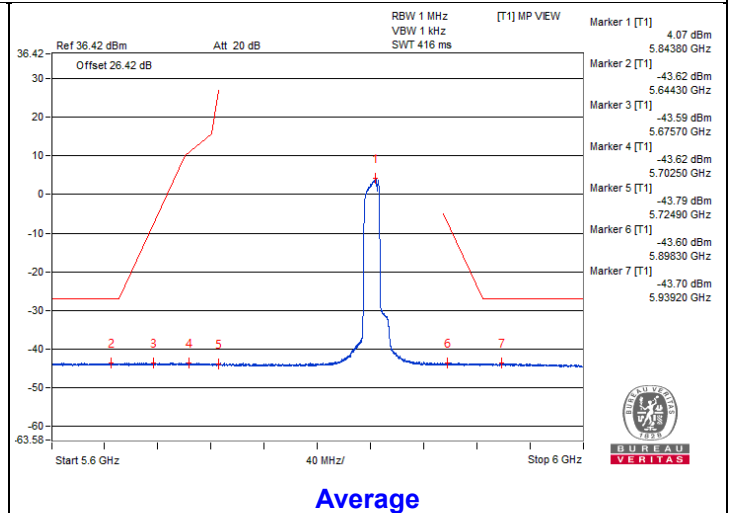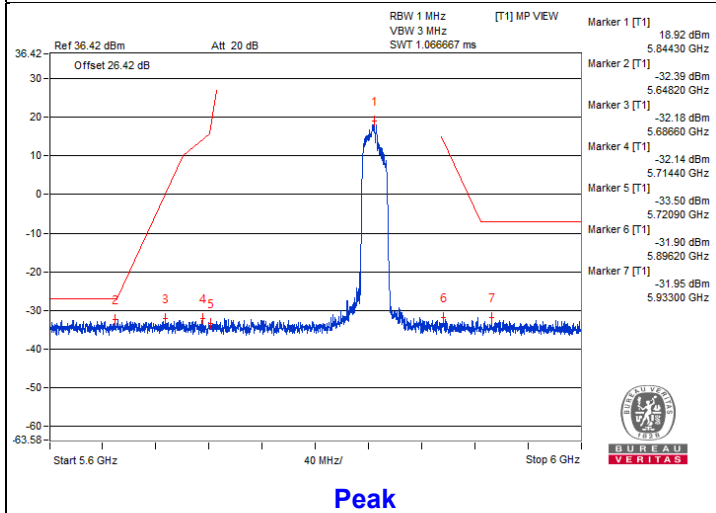

Chain 1

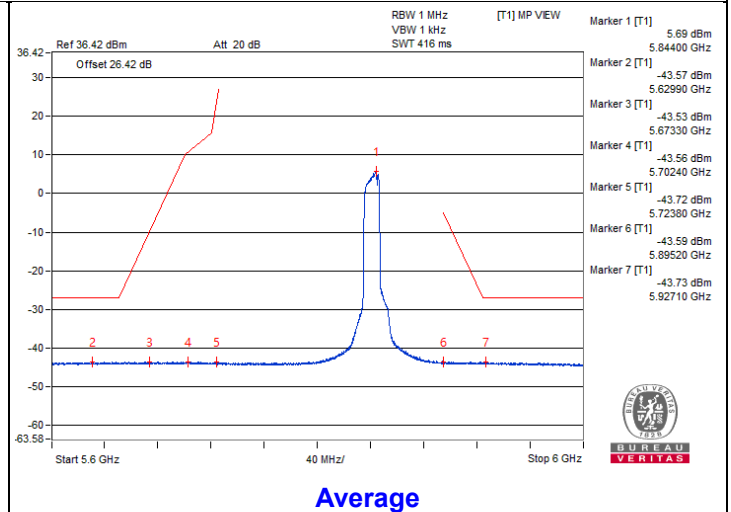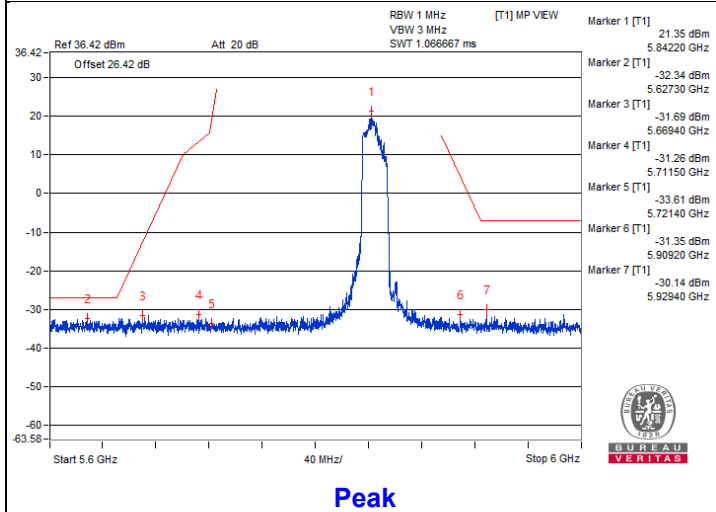

802.11be (EHT20) 106+26-tone MRU - Channel 173
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3900	56.59 PK	74	-17.41	-46.89	-46.33	4.92	-38.67
2	3890.62	46.68 AV	54	-7.32	-56.59	-56.43	4.92	-48.58
3	#7835.93	55.02 PK	68.2	-13.18	-49.66	-47.06	4.92	-40.24
4	11742.18	54.93 PK	74	-19.07	-48.82	-47.76	4.92	-40.33
5	11731.87	44.93 AV	54	-9.07	-57.75	-58.83	4.92	-50.33
6	#17609.81	55.63 PK	68.2	-12.57	-46.52	-48.92	4.92	-39.63

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

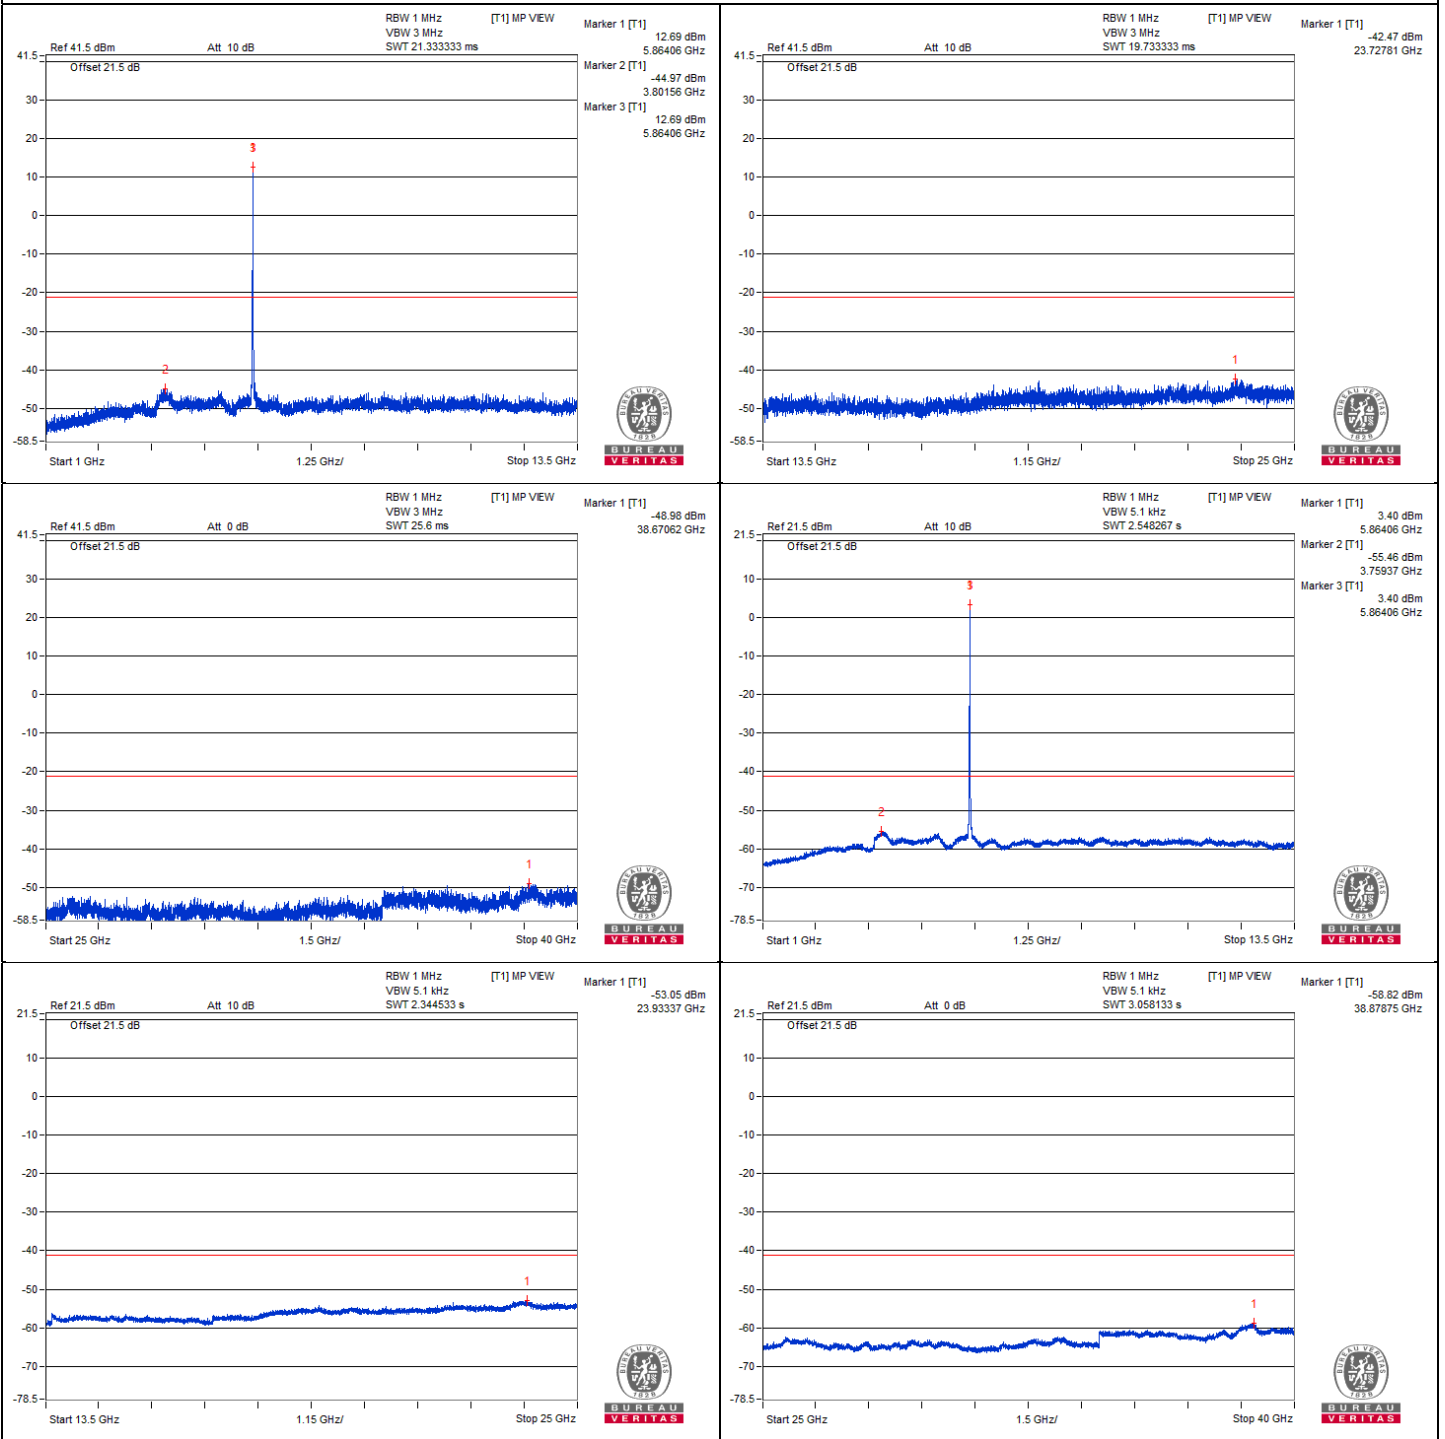




Chain 1

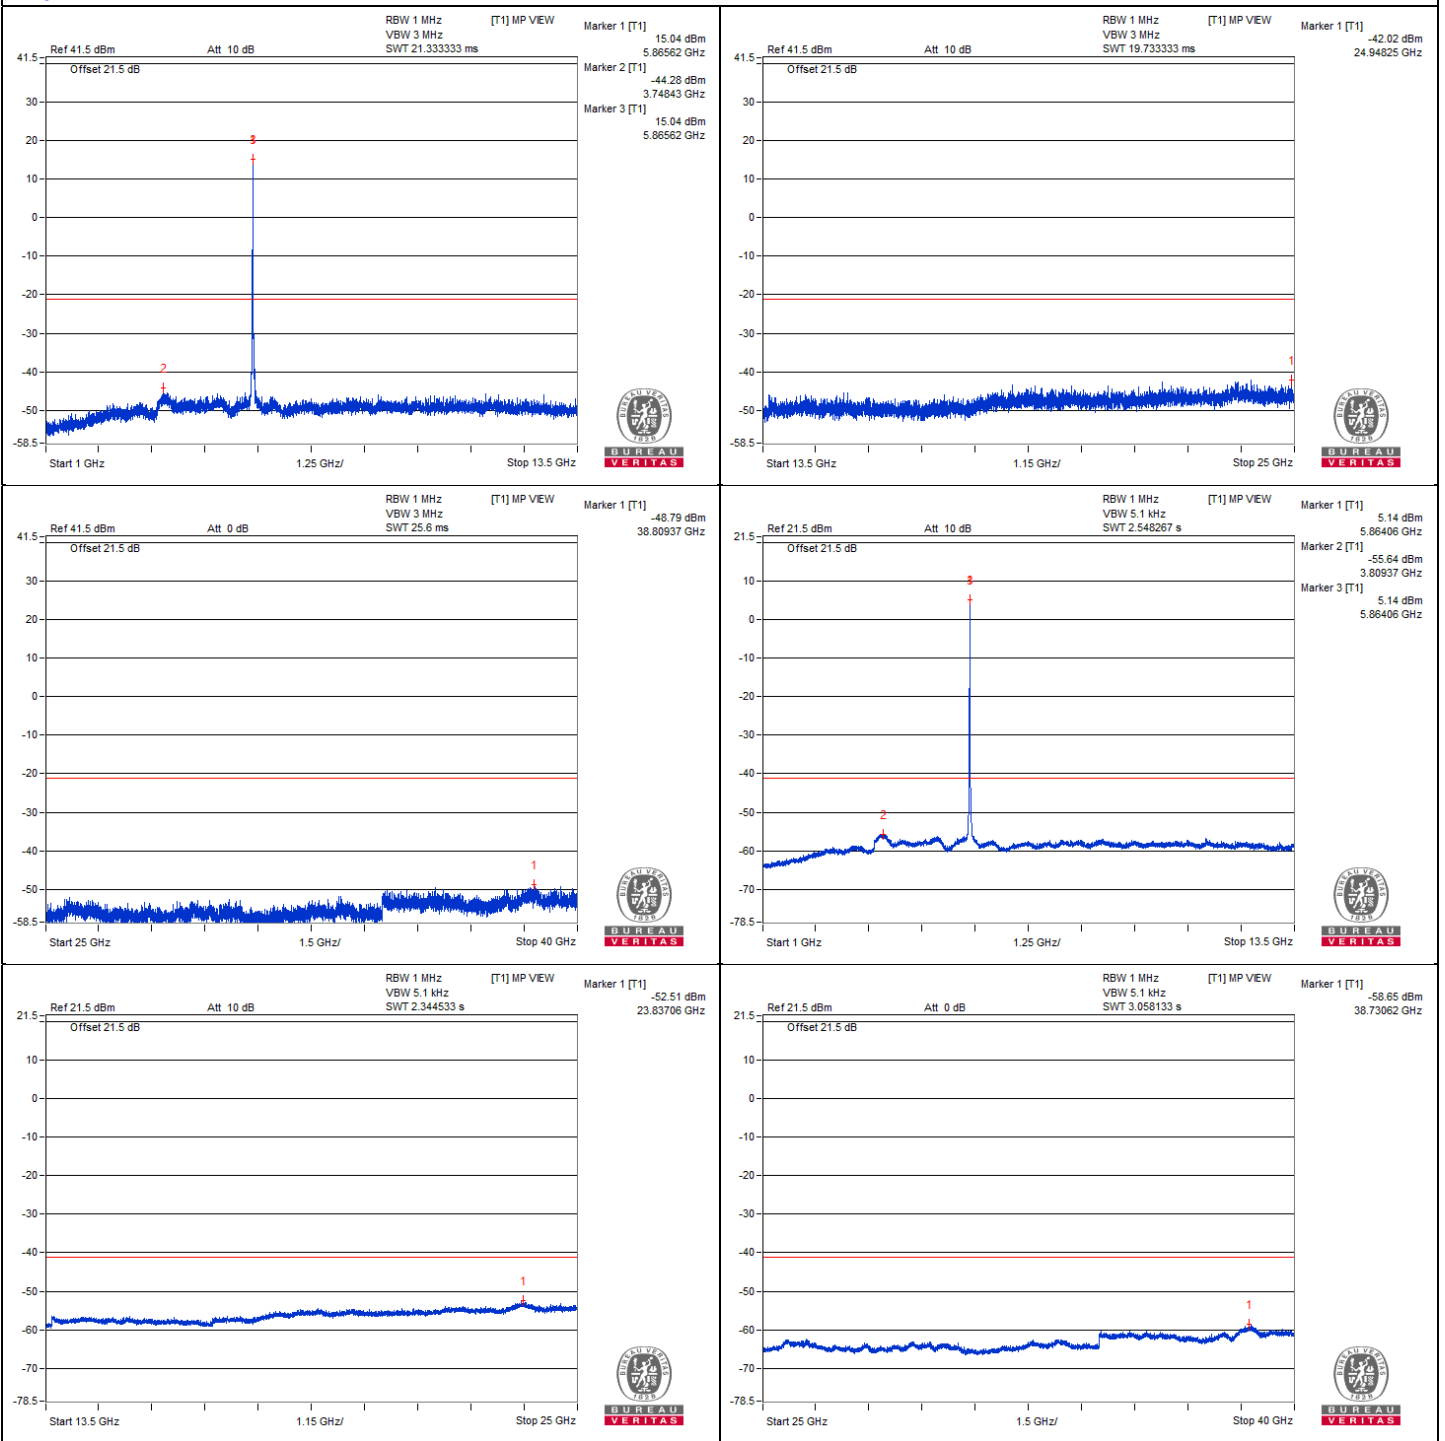




Bandedge table

Chain 0

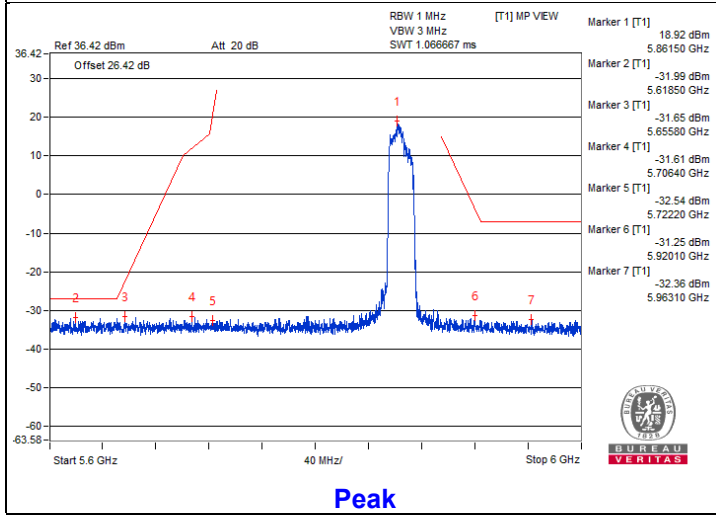


Peak

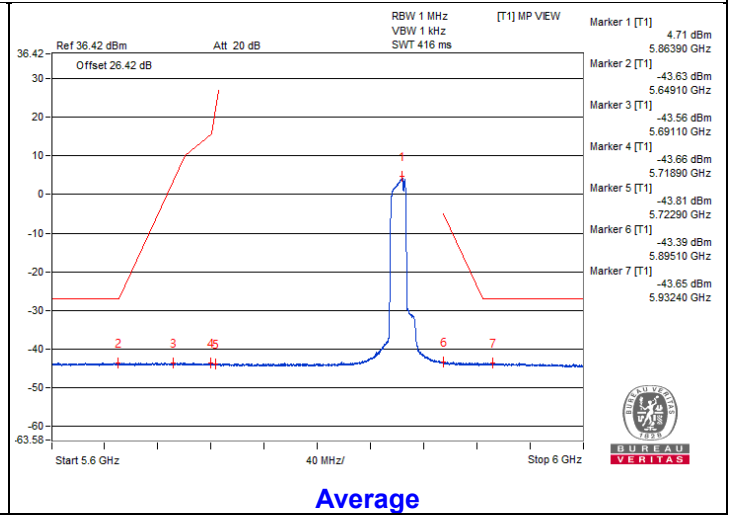


Average

Chain 1

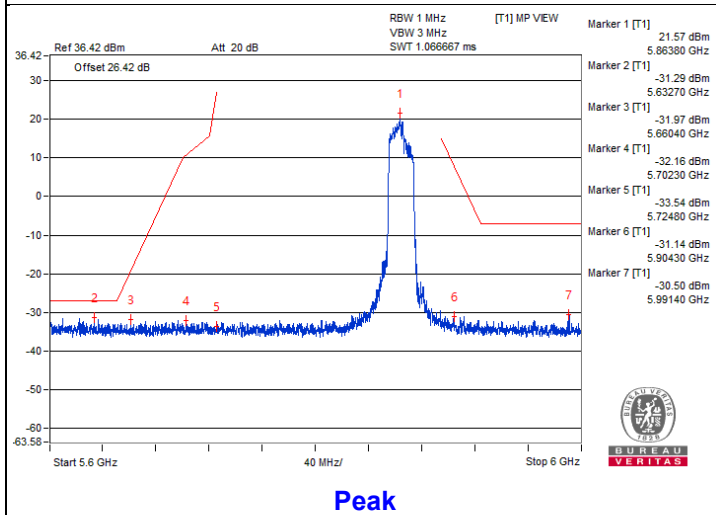

Peak

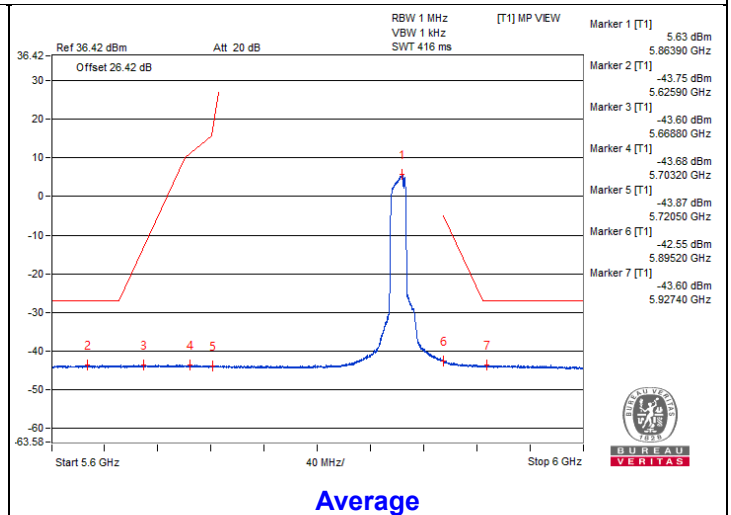

Average

802.11be (EHT20) 106+26-tone MRU - Channel 177

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3906.25	56.29 PK	74	-17.71	-46.92	-46.88	4.92	-38.97
2	3909.37	46.41 AV	54	-7.59	-56.88	-56.68	4.92	-48.85
3	#7831.25	54.72 PK	68.2	-13.48	-49.56	-47.6	4.92	-40.54
4	11789.06	54.66 PK	74	-19.34	-47.55	-49.81	4.92	-40.60
5	11785.93	45.03 AV	54	-8.97	-58.08	-58.25	4.92	-50.23
6	#17640	55.44 PK	68.2	-12.76	-49.04	-46.76	4.92	-39.82

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

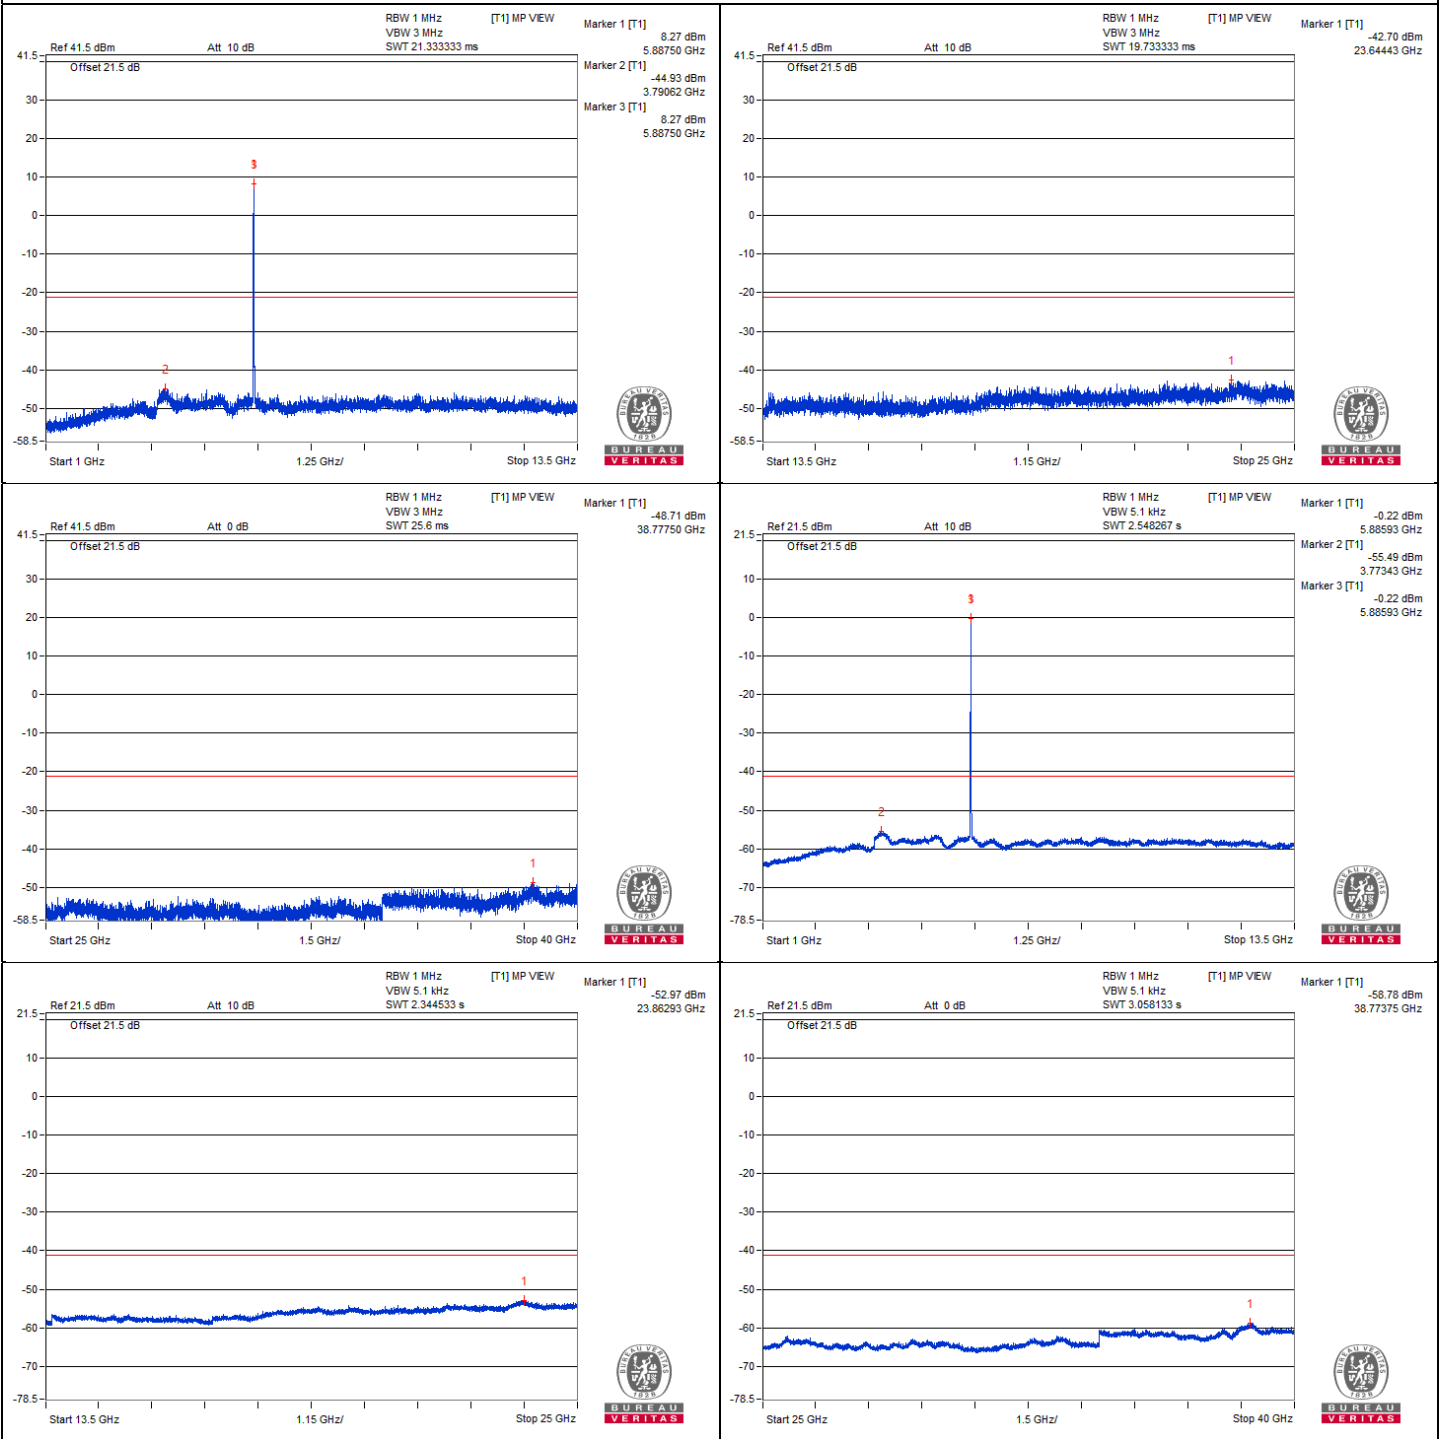





Chain 1

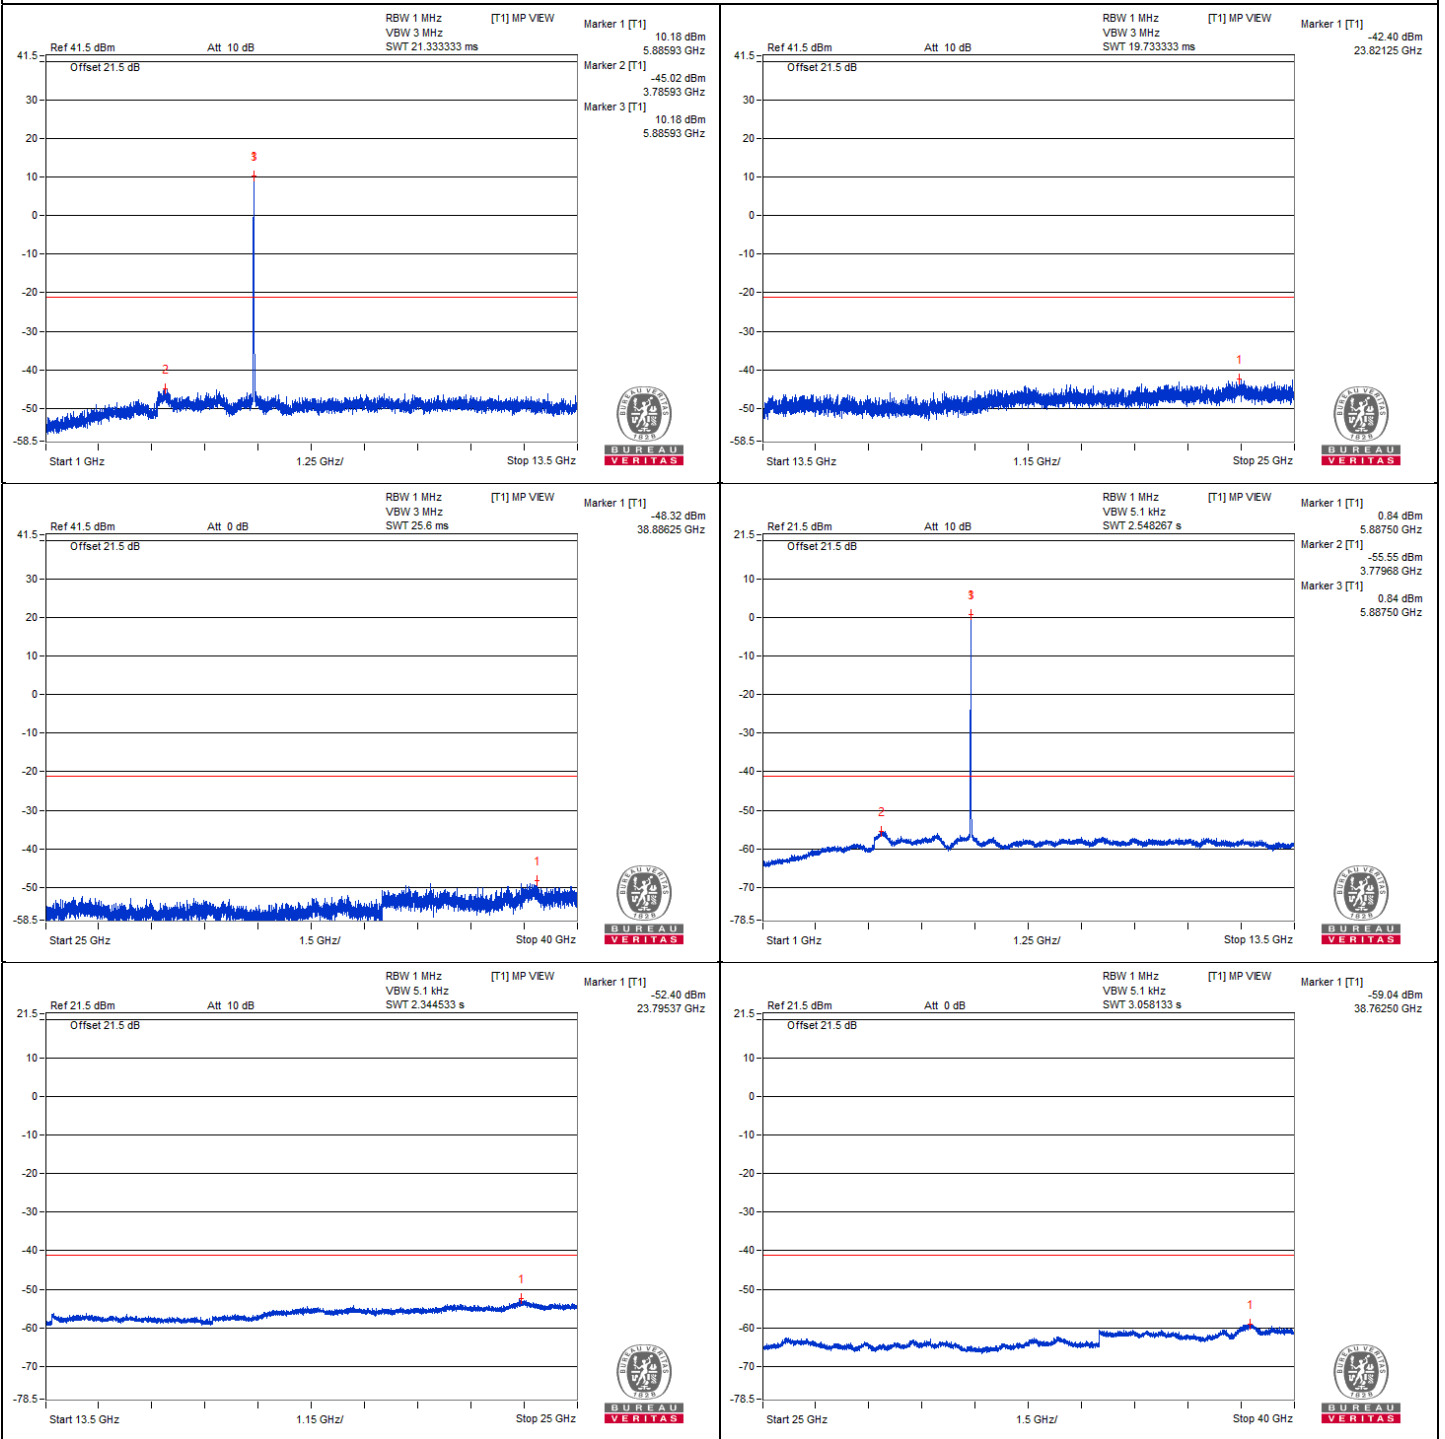





Bandedge table

Chain 0

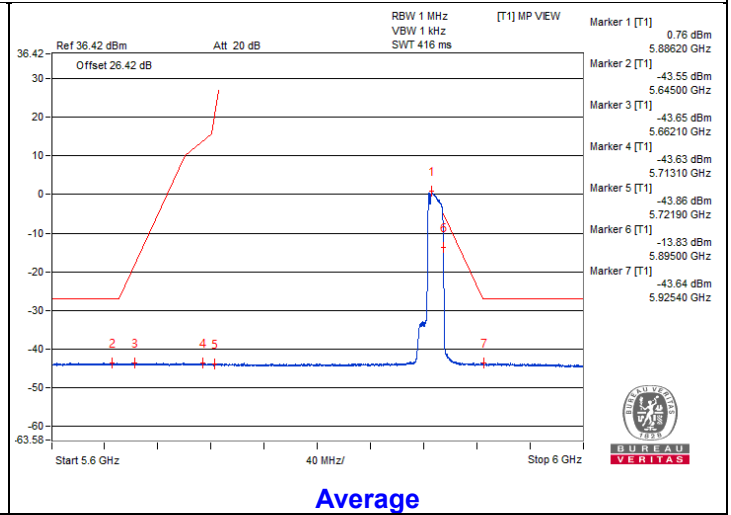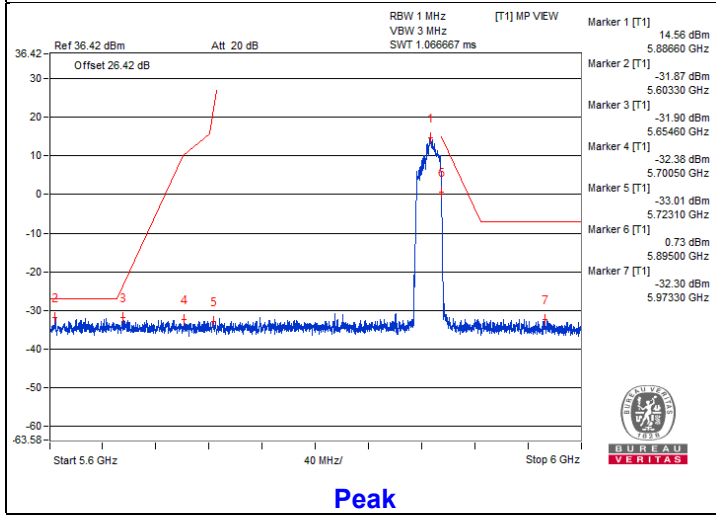

Chain 1

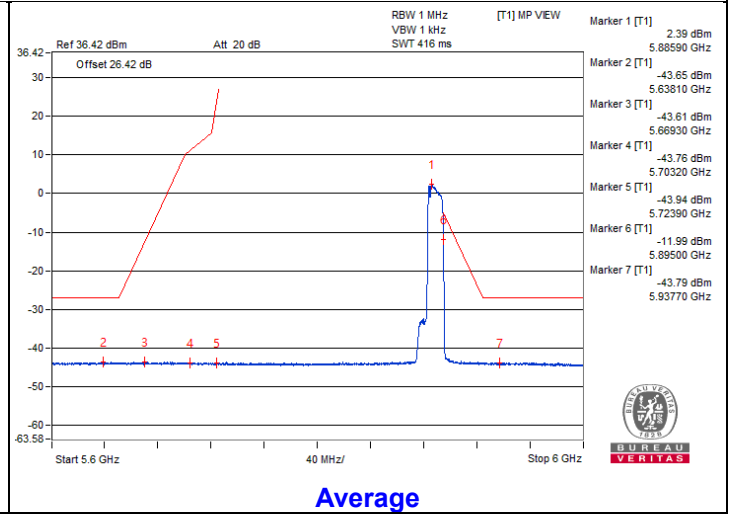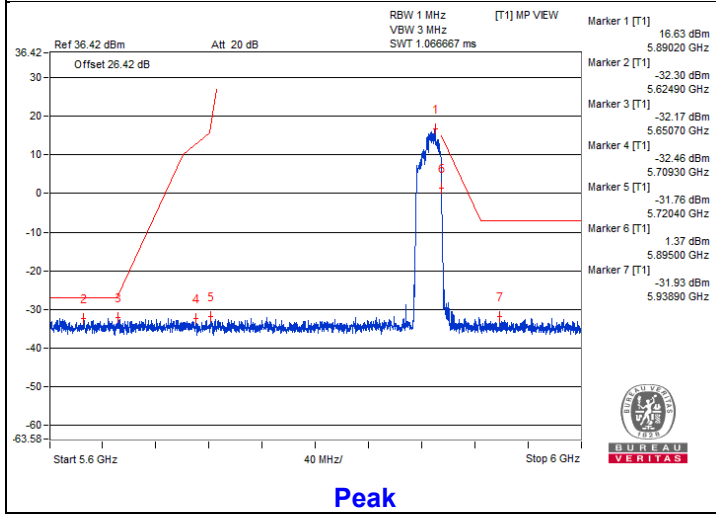

802.11be (EHT80) 484+242-tone MRU - Channel 171
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3889.06	56.7 PK	74	-17.3	-46.3	-46.69	4.92	-38.56
2	3890.62	46.56 AV	54	-7.44	-56.72	-56.54	4.92	-48.70
3	#7812.5	55.27 PK	68.2	-12.93	-48.85	-47.15	4.92	-39.99
4	11715.62	54.96 PK	74	-19.04	-49.38	-47.32	4.92	-40.30
5	11721.87	44.97 AV	54	-9.03	-58.41	-58.03	4.92	-50.29
6	#17573.87	55.1 PK	68.2	-13.1	-49.27	-47.16	4.92	-40.16

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

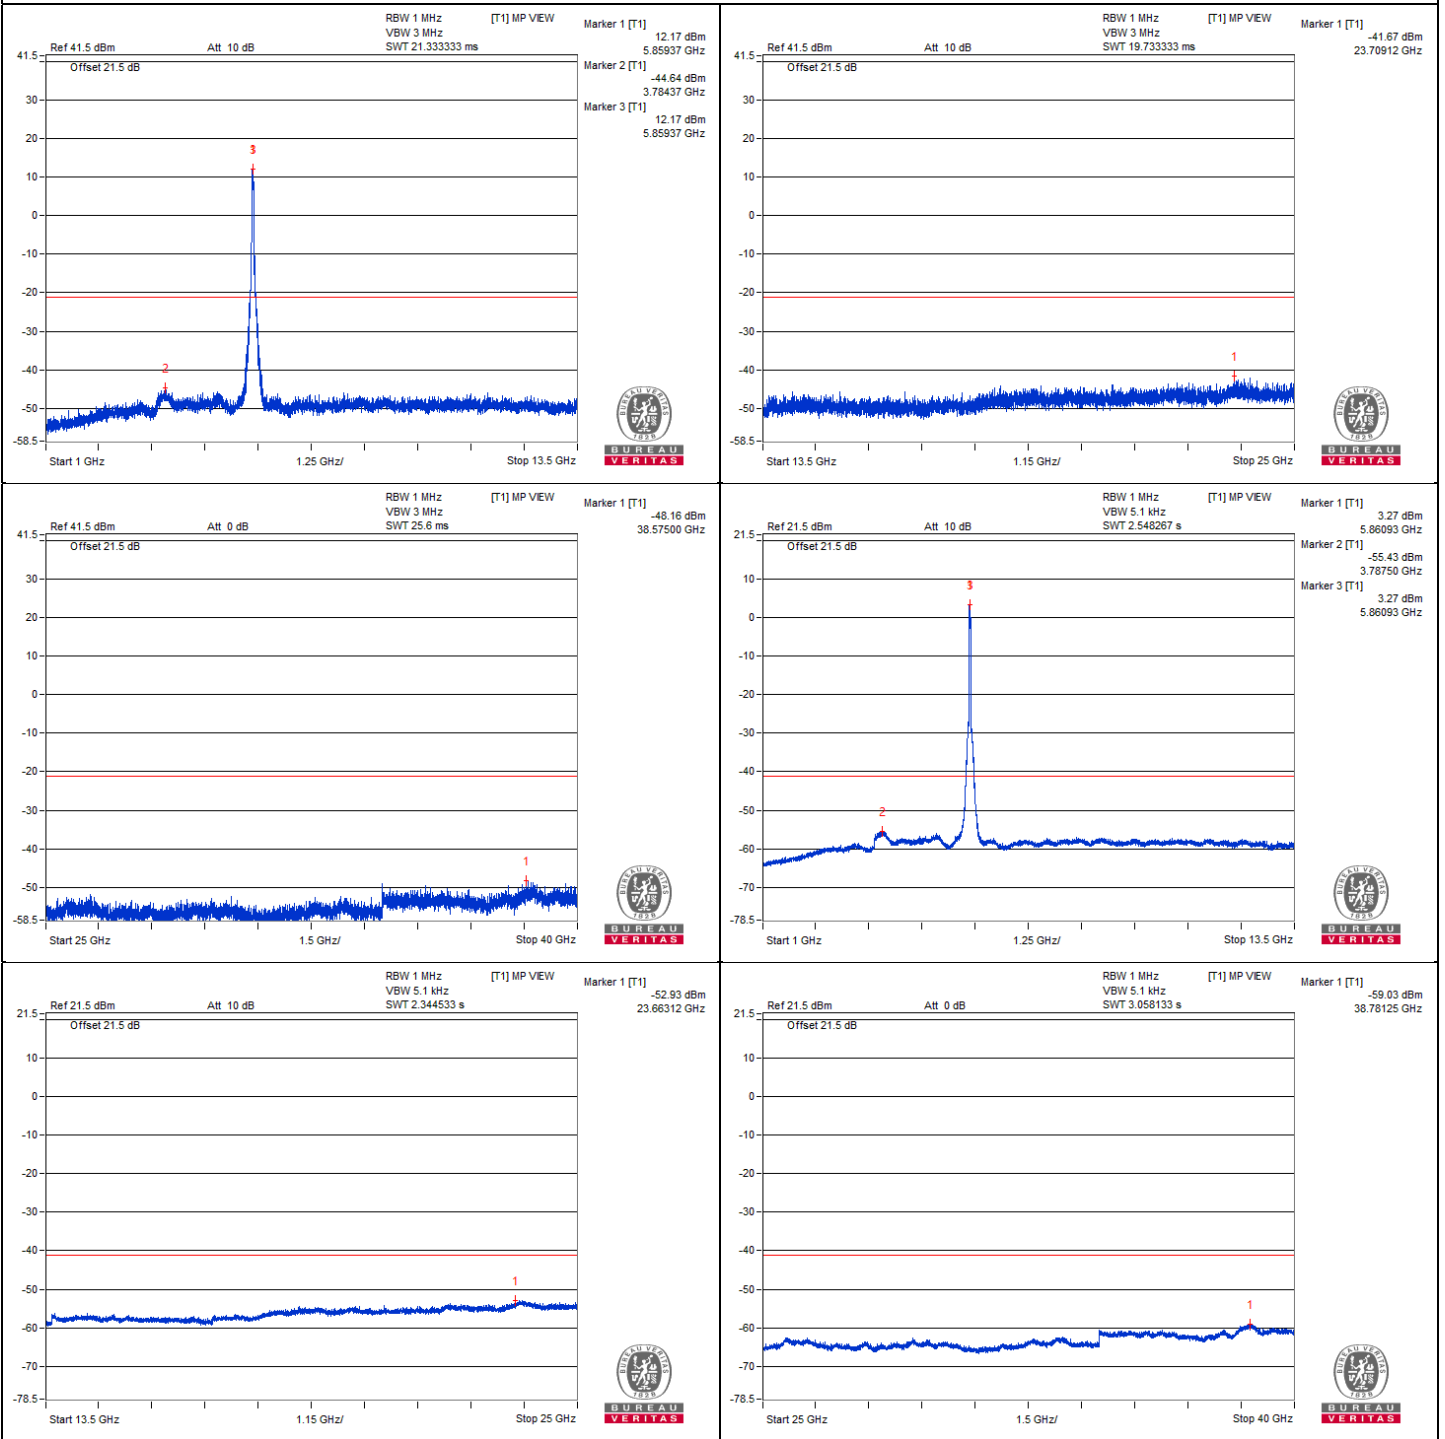





Chain 1

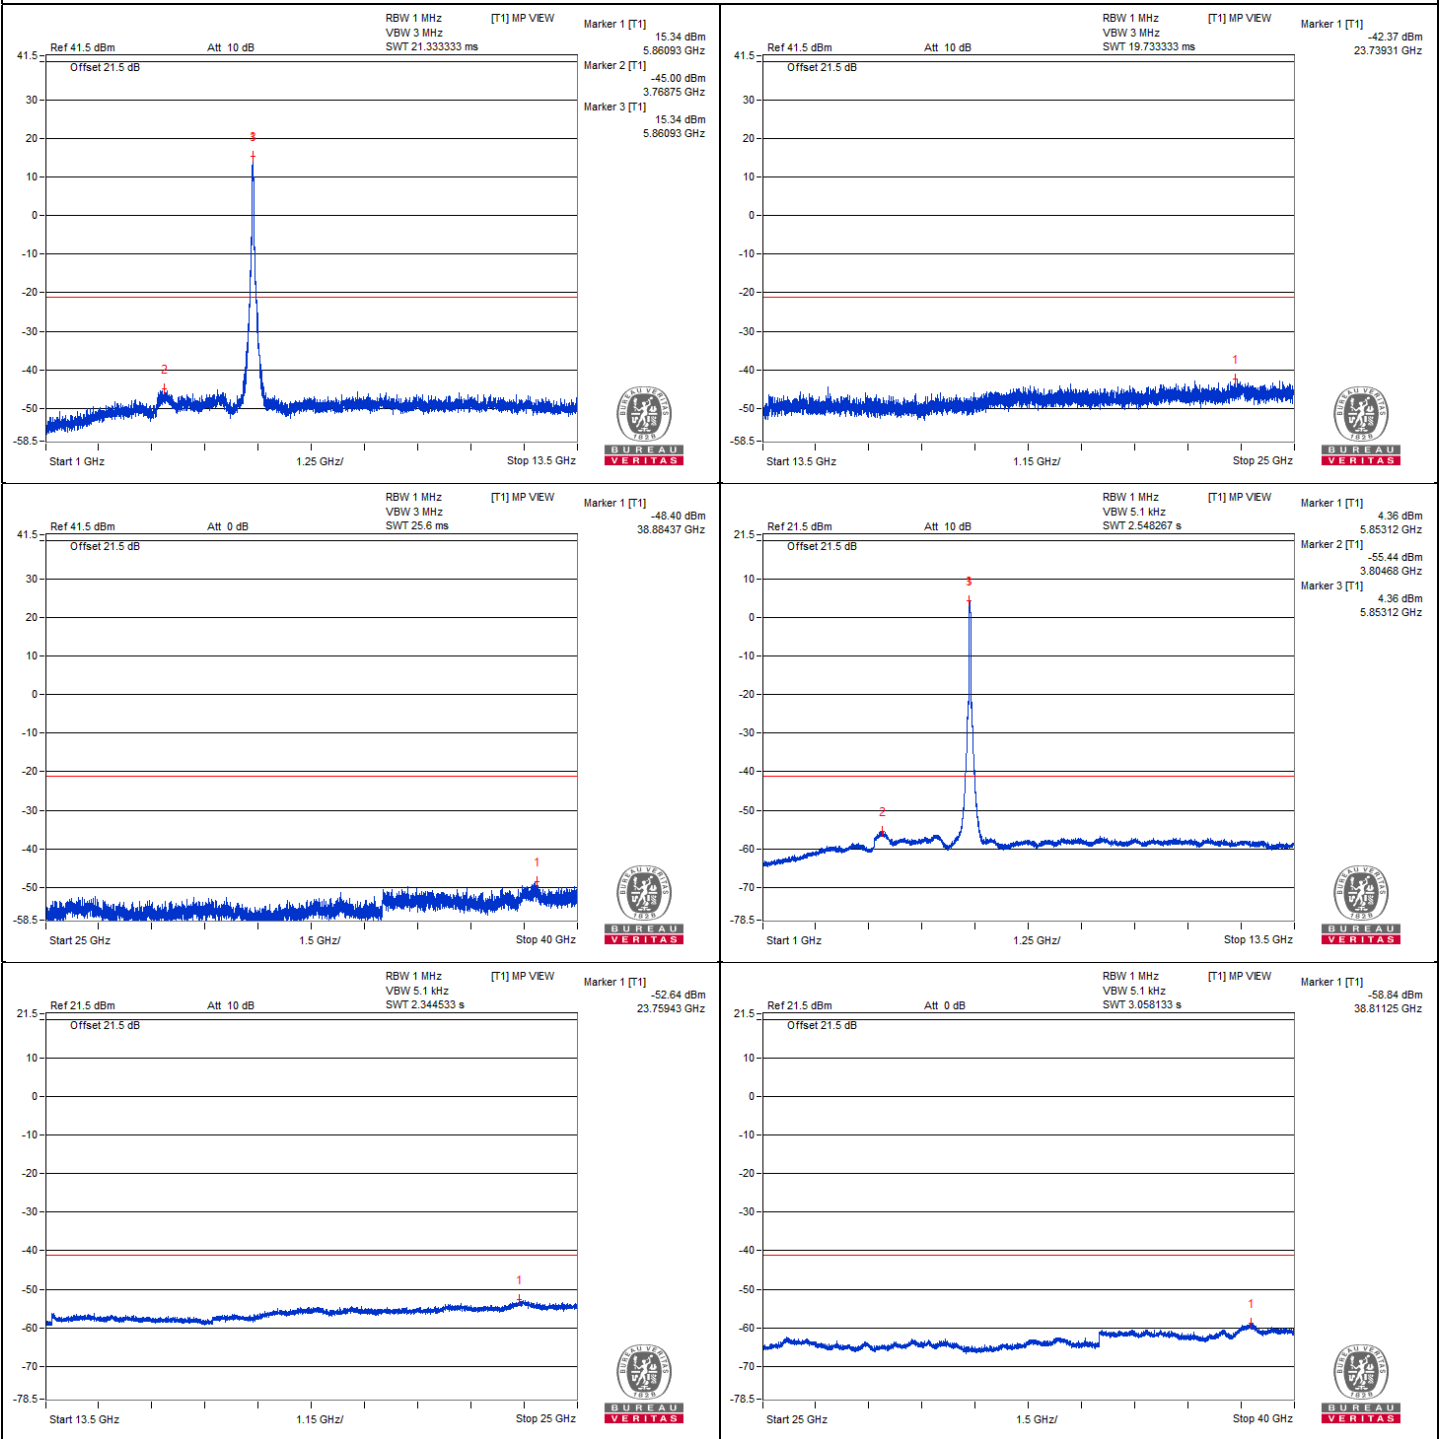





Bandedge table

Chain 0

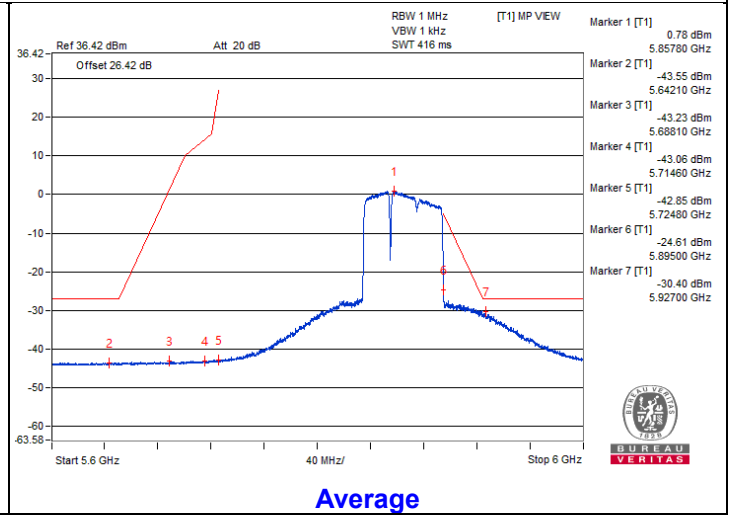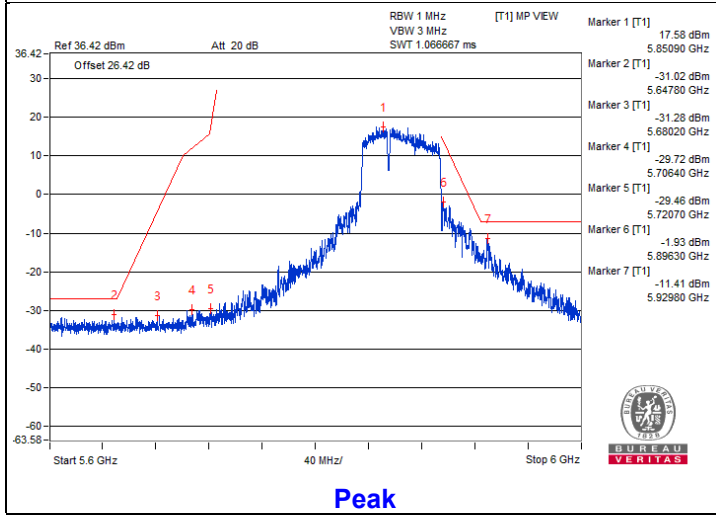

Chain 1

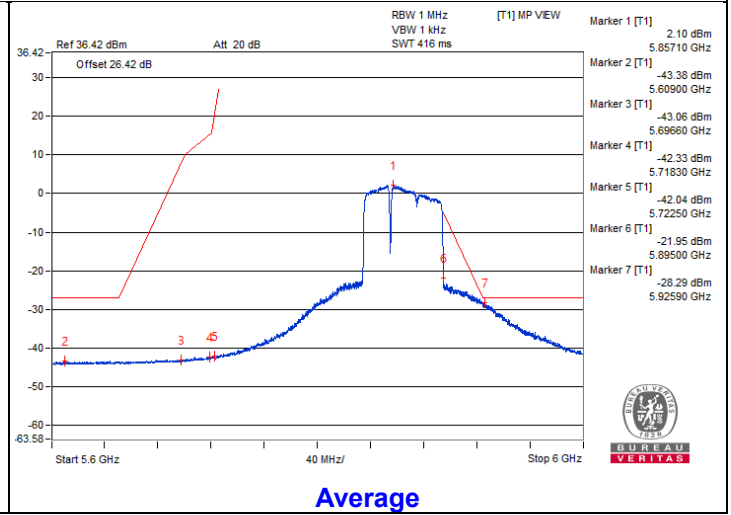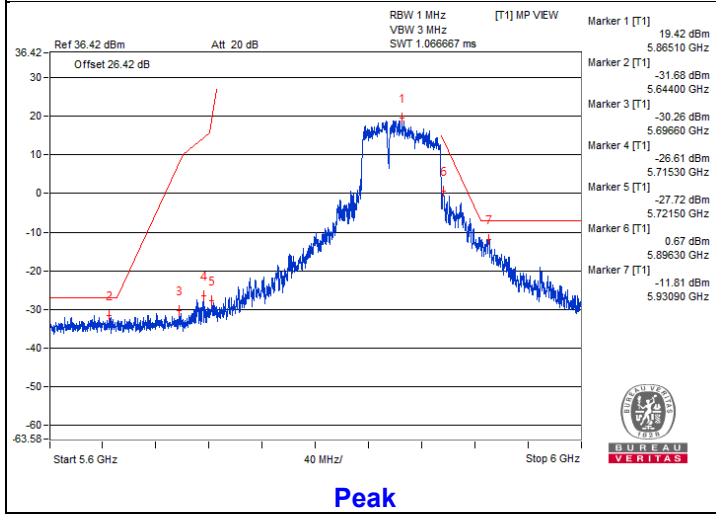

802.11be (EHT160) 996+484-tone MRU - Channel 163
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3859.37	56.49 PK	74	-17.51	-46.13	-47.36	4.92	-38.77
2	3873.43	47.02 AV	54	-6.98	-56.22	-56.13	4.92	-48.24
3	7748.43	54.83 PK	74	-19.17	-50.35	-47	4.92	-40.43
4	7750	45.07 AV	54	-8.93	-58.17	-58.07	4.92	-50.19
5	11637.5	55.35 PK	74	-18.65	-48.97	-46.95	4.92	-39.91
6	11650	44.92 AV	54	-9.08	-58.53	-58.03	4.92	-50.34
7	#17440.18	54.9 PK	68.2	-13.3	-46.7	-50.84	4.92	-40.36

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

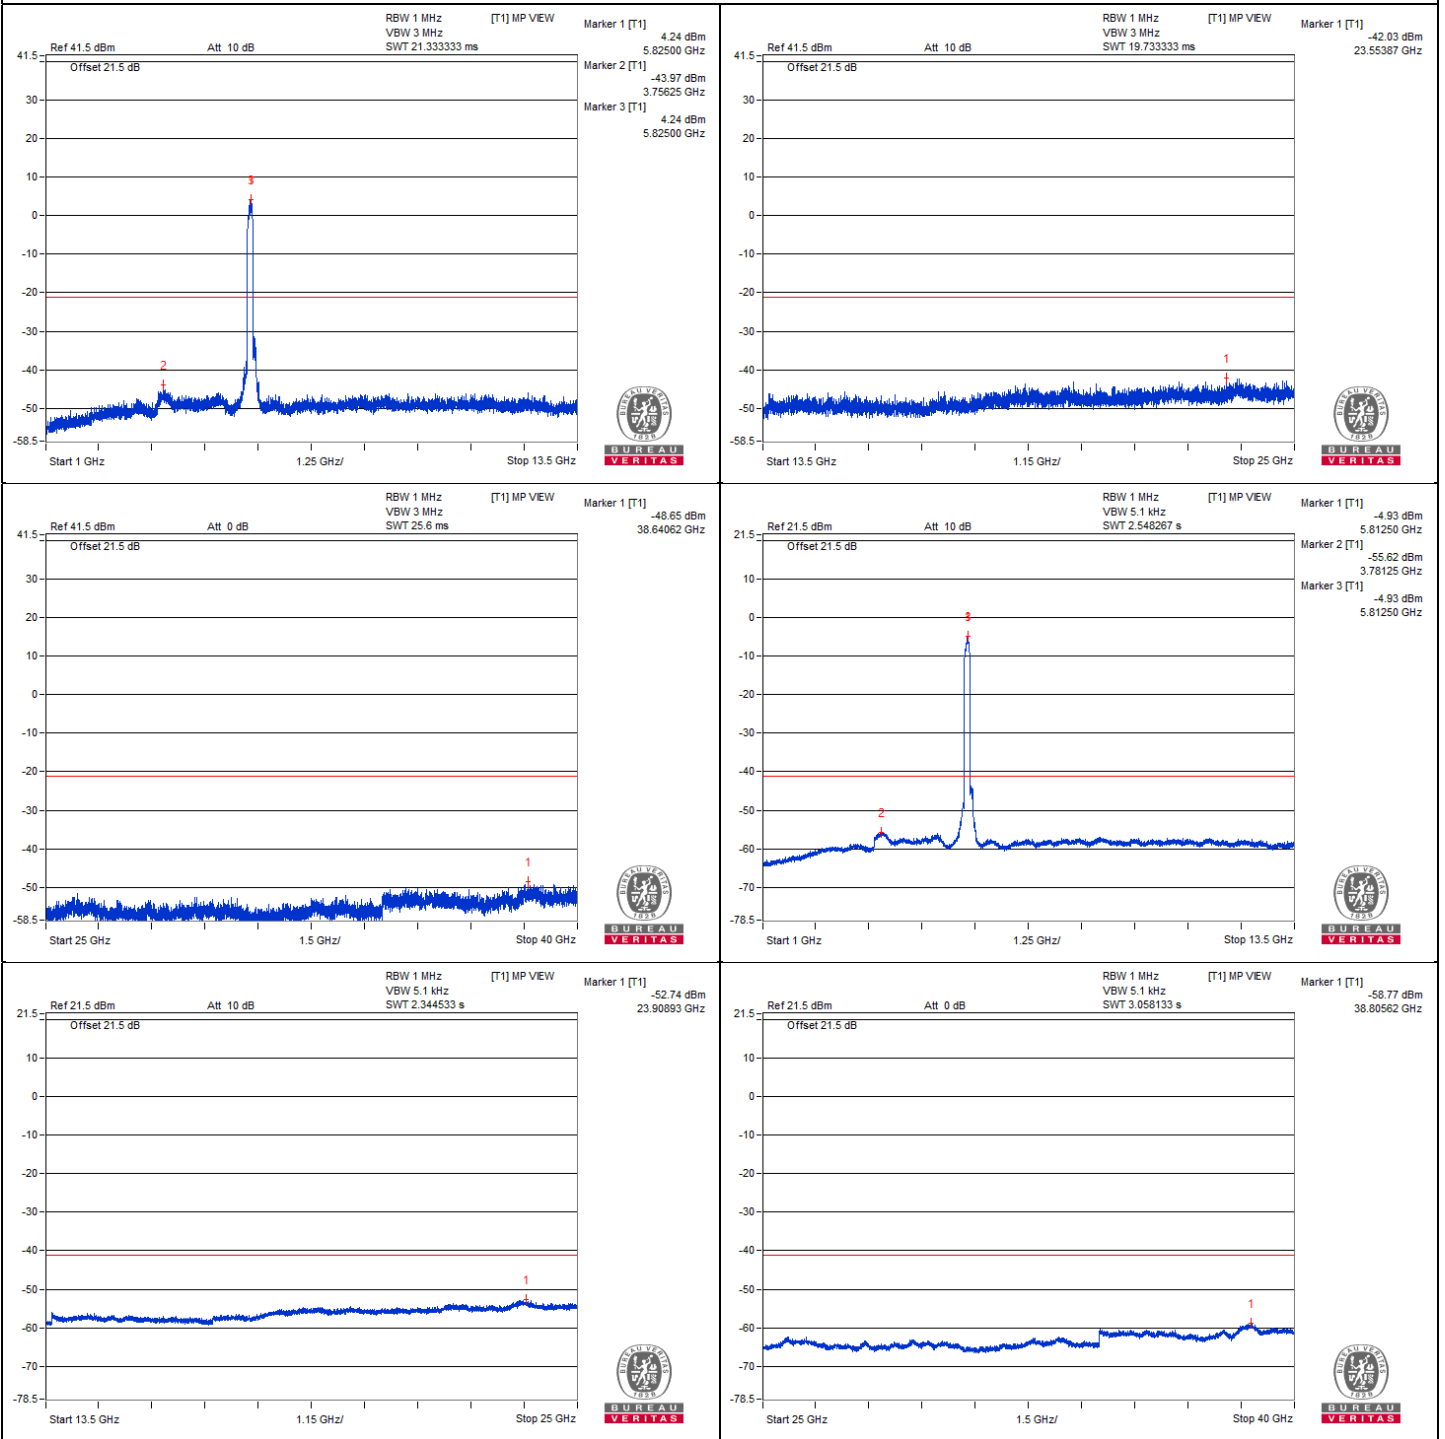





Chain 1

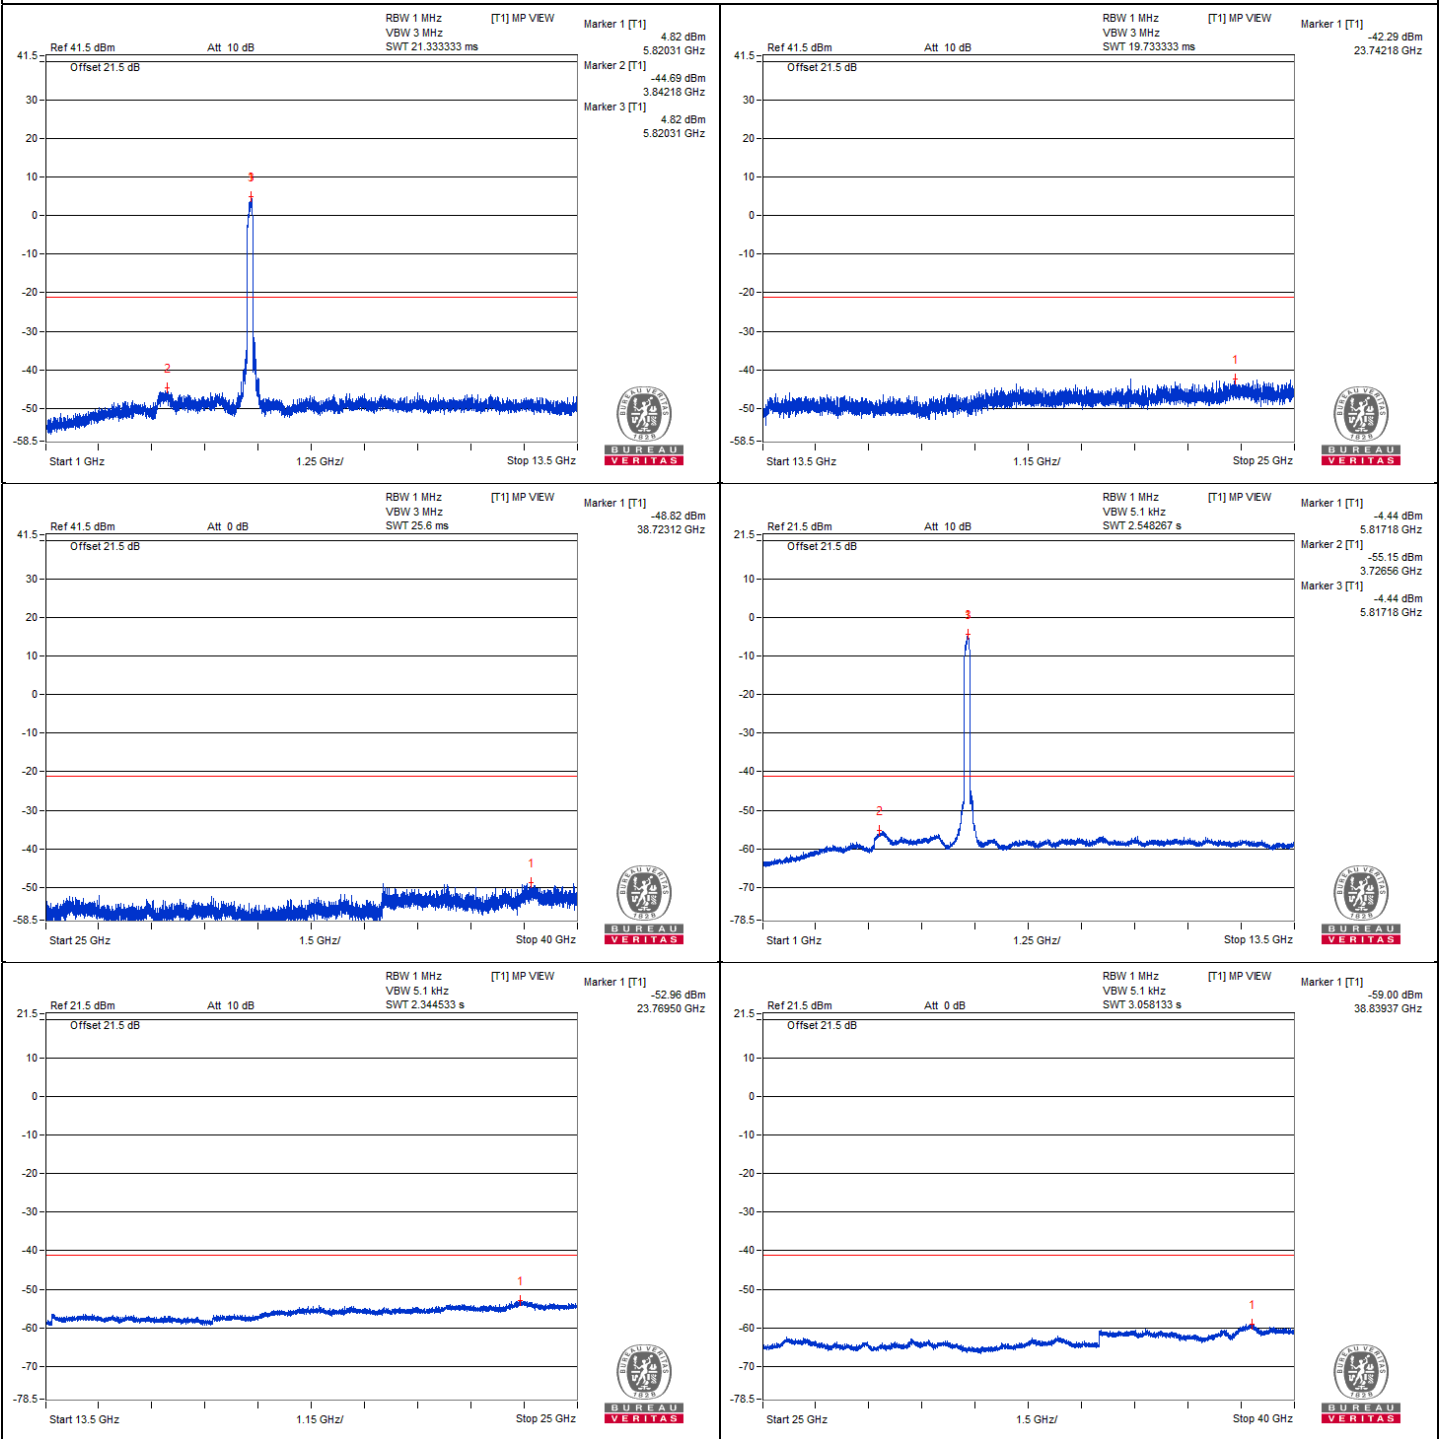





Bandedge table

Chain 0

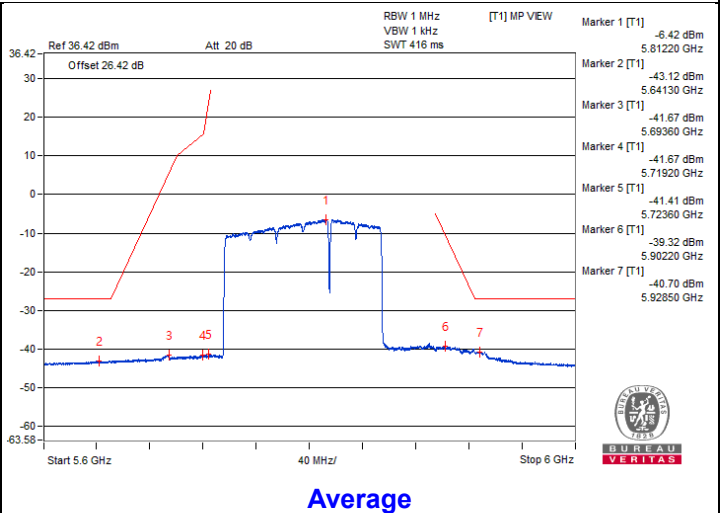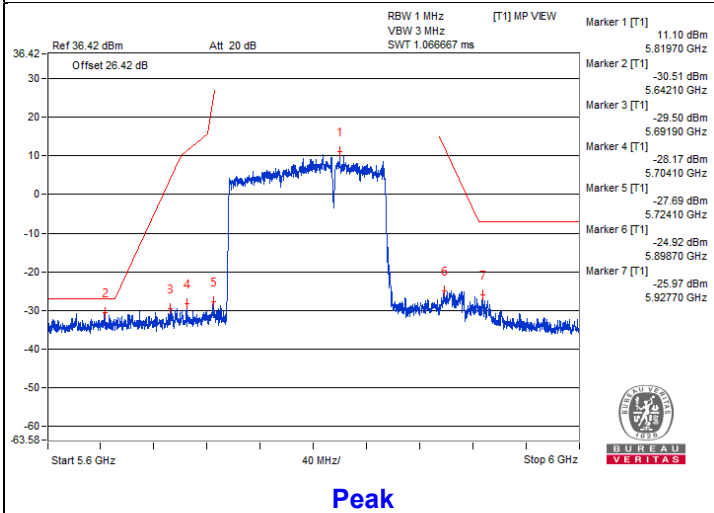

Chain 1

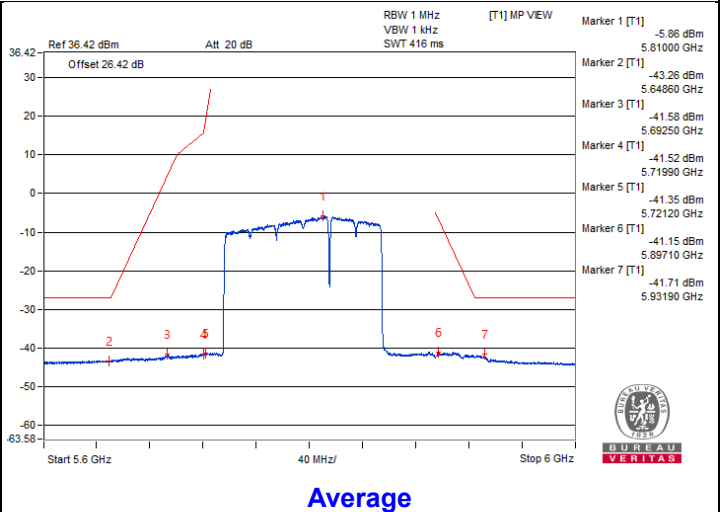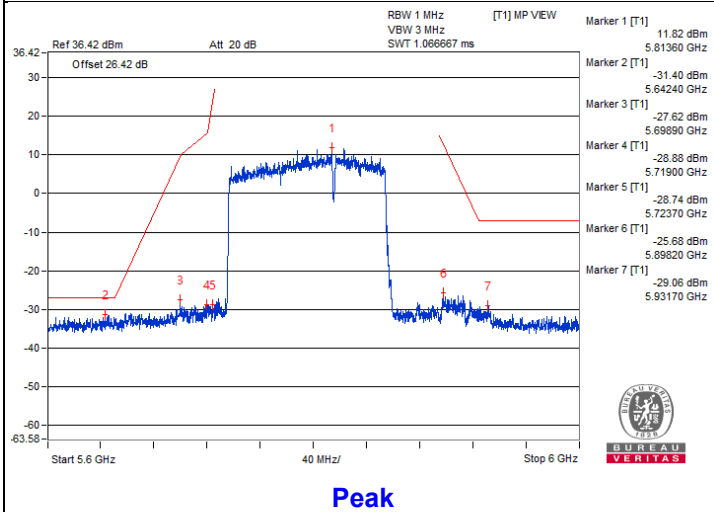

802.11be (EHT160) 996+484+242-tone MRU - Channel 163
Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3862.5	56.84 PK	74	-17.16	-46.92	-45.85	4.92	-38.42
2	3875	47.2 AV	54	-6.8	-56.1	-55.88	4.92	-48.06
3	#7771.87	54.97 PK	68.2	-13.23	-47.58	-48.96	4.92	-40.29
4	11612.5	54.75 PK	74	-19.25	-47.86	-49.1	4.92	-40.51
5	11615.62	44.99 AV	54	-9.01	-58.22	-58.18	4.92	-50.27
6	#17451.68	55.64 PK	68.2	-12.56	-46.45	-49.04	4.92	-39.62

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




Chain 0

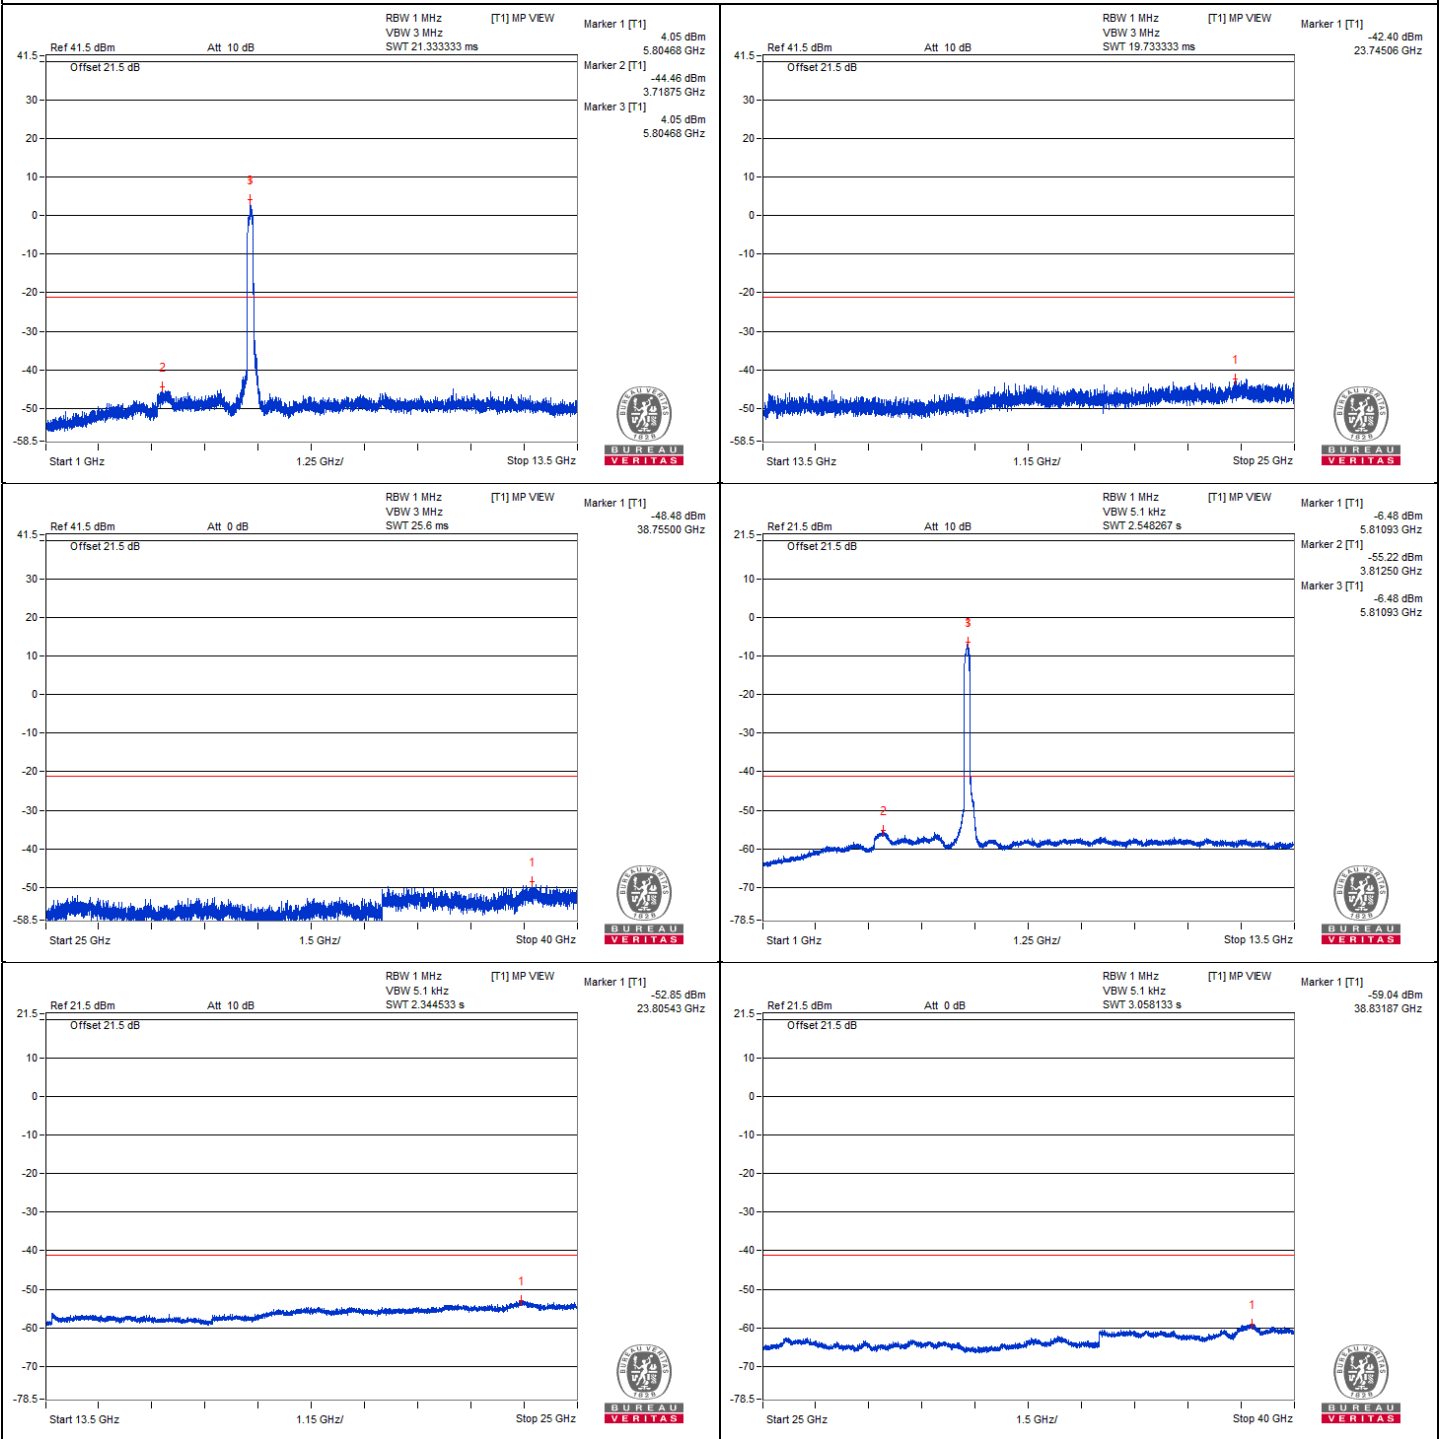




Chain 1

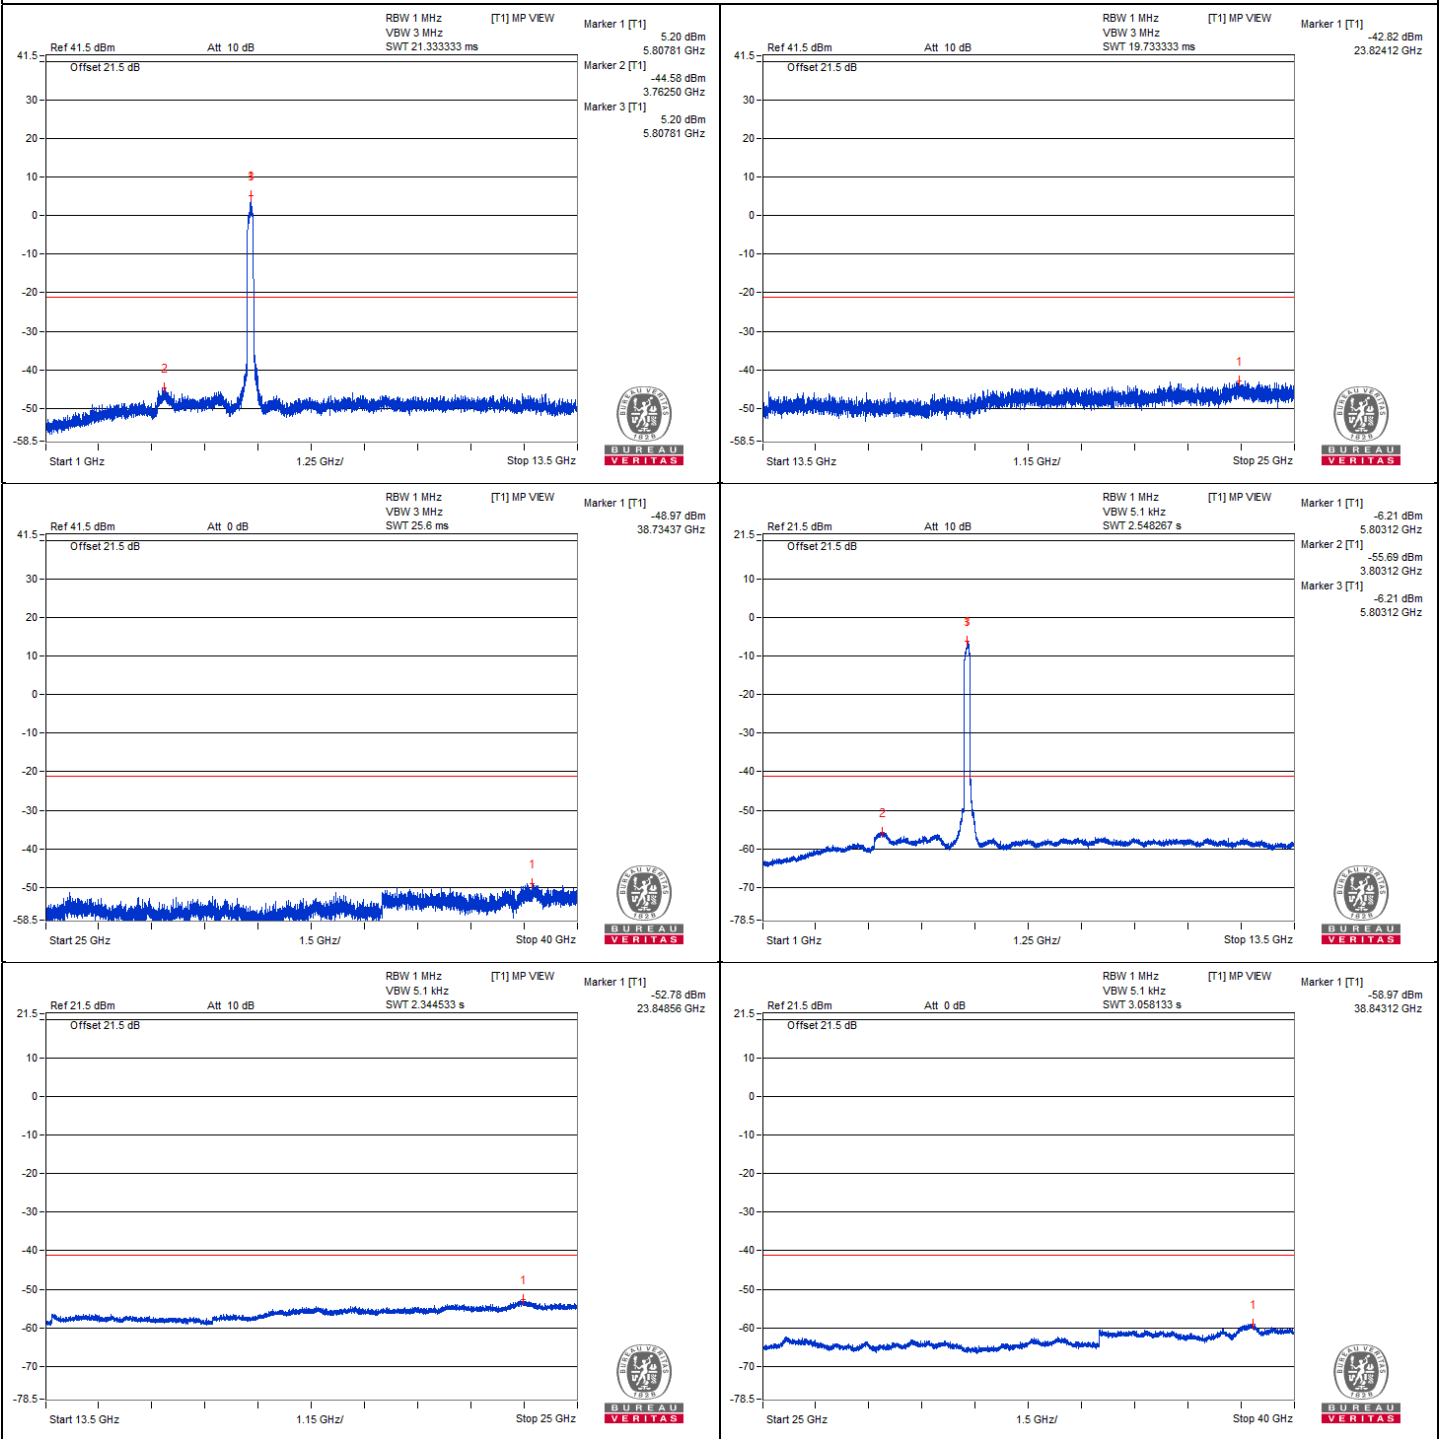




Bandedge table

Chain 0

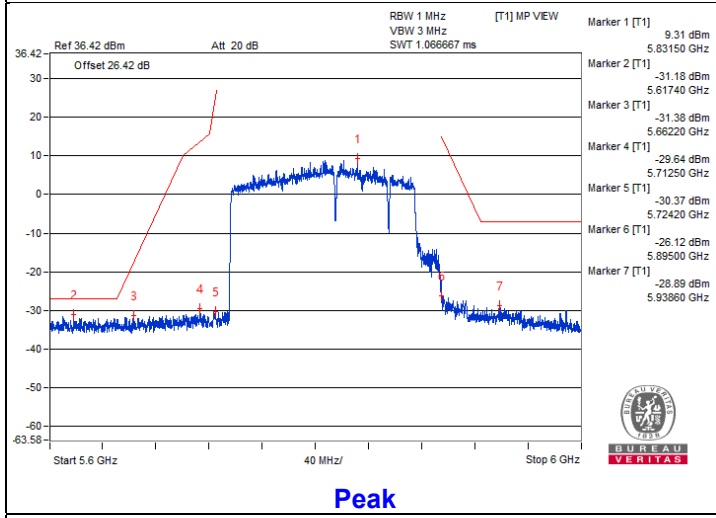


Peak

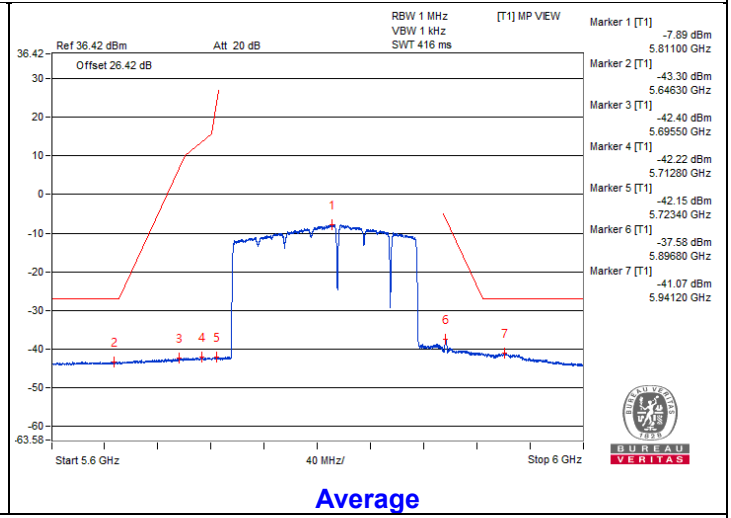


Average

Chain 1

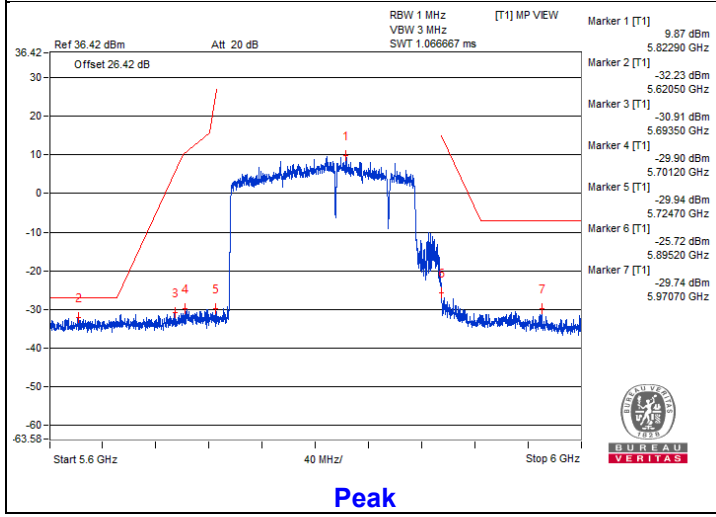

Peak

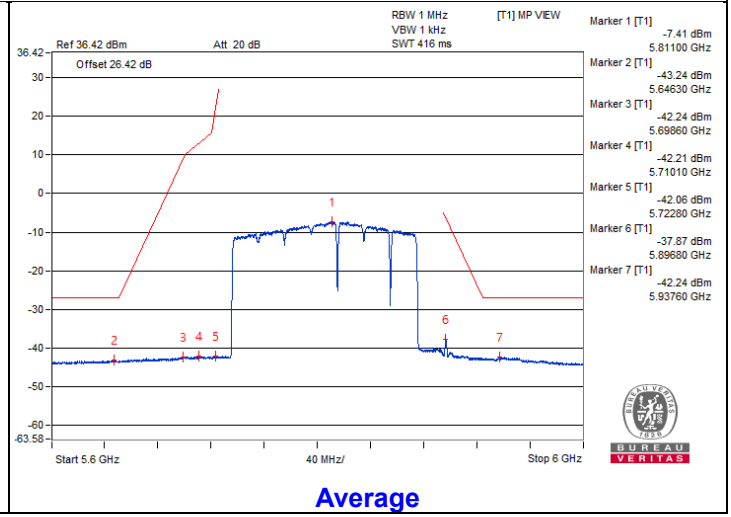

Average


Mode B
1TX

RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.1 PK	74.0	-25.9	3.32 H	55	31.7	16.4
2	11690.00	38.3 AV	54.0	-15.7	3.32 H	55	21.9	16.4
3	#17535.00	52.5 PK	88.2	-35.7	1.45 H	187	30.4	22.1
4	#17535.00	42.2 AV	68.2	-26.0	1.45 H	187	20.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

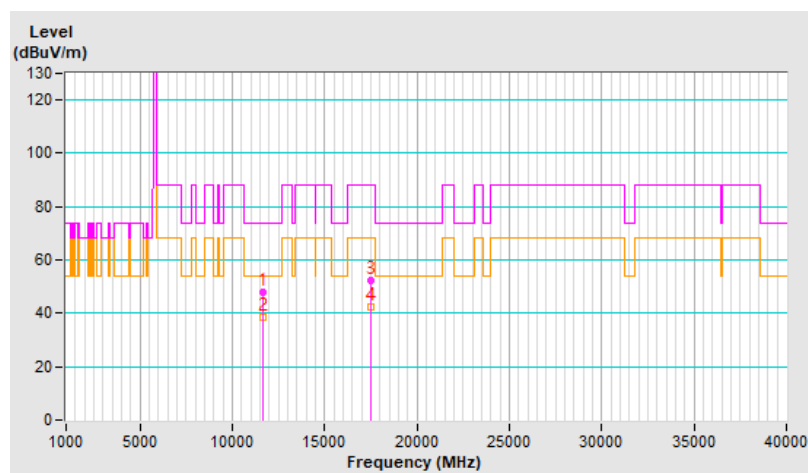


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	2.01 V	197	32.2	16.4
2	11690.00	39.3 AV	54.0	-14.7	2.01 V	197	22.9	16.4
3	#17535.00	55.3 PK	88.2	-32.9	1.54 V	55	33.2	22.1
4	#17535.00	43.0 AV	68.2	-25.2	1.54 V	55	20.9	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

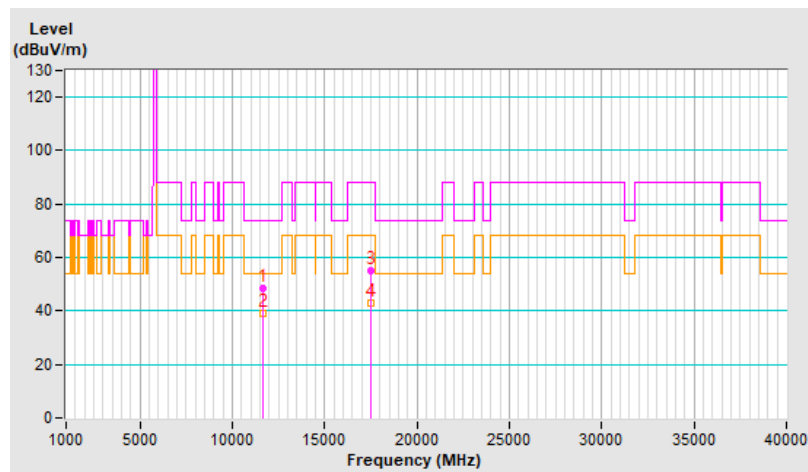


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.6 PK	74.0	-25.4	3.32 H	46	32.5	16.1
2	11730.00	38.6 AV	54.0	-15.4	3.32 H	46	22.5	16.1
3	#17595.00	53.2 PK	88.2	-35.0	1.46 H	201	31.1	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.46 H	201	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

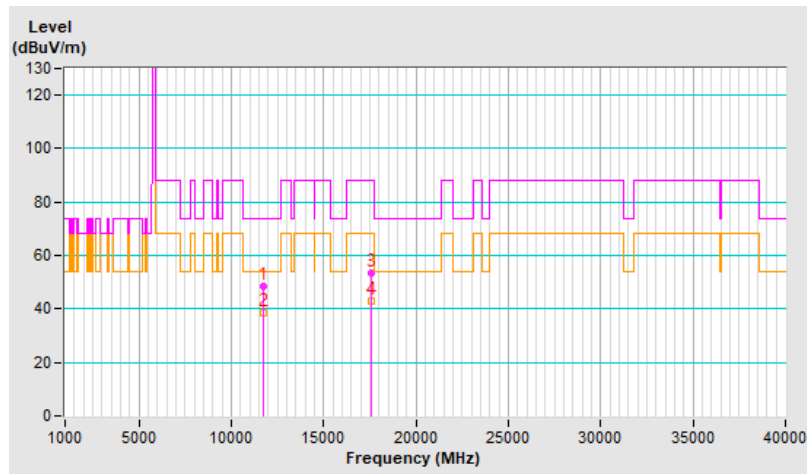


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.7 PK	74.0	-25.3	1.99 V	195	32.6	16.1
2	11730.00	39.1 AV	54.0	-14.9	1.99 V	195	23.0	16.1
3	#17595.00	55.8 PK	88.2	-32.4	1.51 V	58	33.7	22.1
4	#17595.00	43.2 AV	68.2	-25.0	1.51 V	58	21.1	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

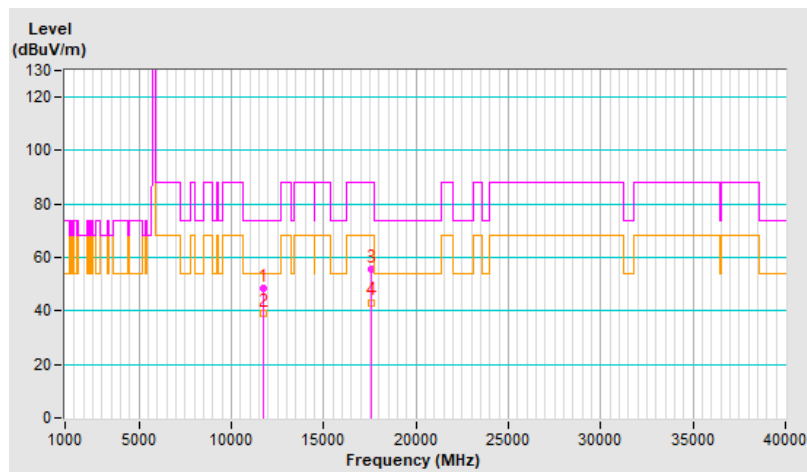


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	3.23 H	43	32.9	16.0
2	11770.00	38.9 AV	54.0	-15.1	3.23 H	43	22.9	16.0
3	#17655.00	52.9 PK	88.2	-35.3	1.39 H	186	30.1	22.8
4	#17655.00	42.9 AV	68.2	-25.3	1.39 H	186	20.1	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

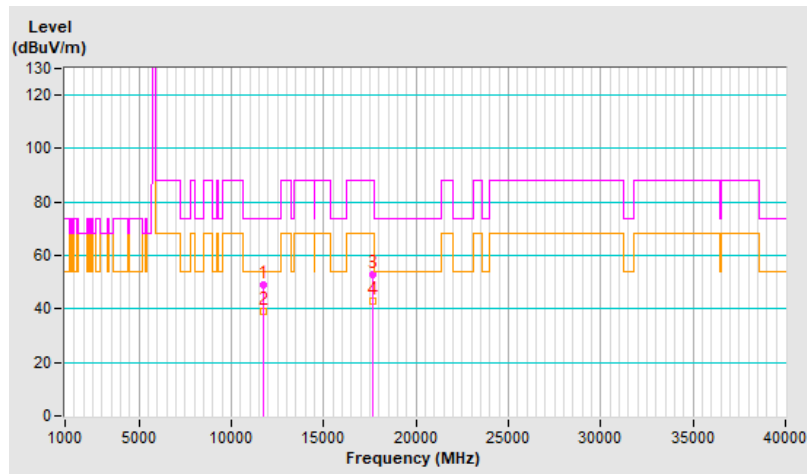


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.8 PK	74.0	-25.2	2.04 V	195	32.8	16.0
2	11770.00	39.4 AV	54.0	-14.6	2.04 V	195	23.4	16.0
3	#17655.00	55.3 PK	88.2	-32.9	1.58 V	52	32.5	22.8
4	#17655.00	43.2 AV	68.2	-25.0	1.58 V	52	20.4	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

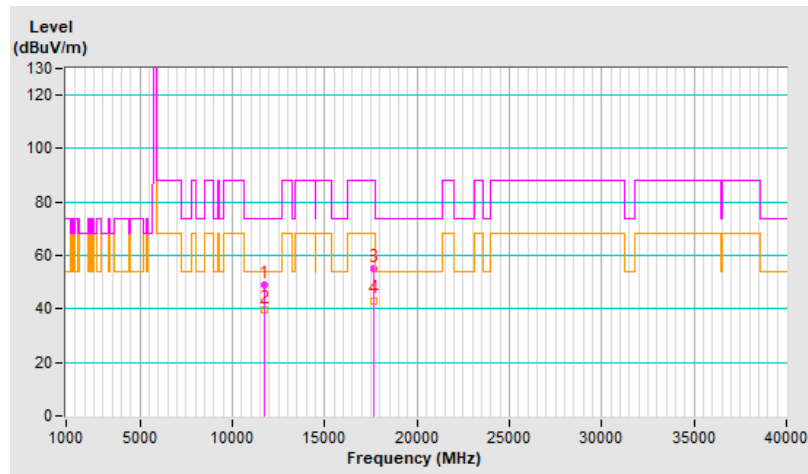


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	3.22 H	50	32.0	16.4
2	11690.00	38.5 AV	54.0	-15.5	3.22 H	50	22.1	16.4
3	#17535.00	52.7 PK	88.2	-35.5	1.48 H	202	30.6	22.1
4	#17535.00	42.6 AV	68.2	-25.6	1.48 H	202	20.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

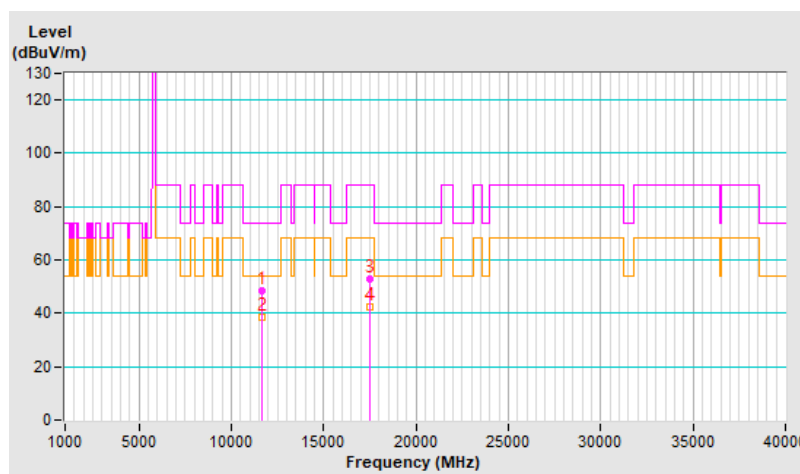


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	49.0 PK	74.0	-25.0	2.03 V	185	32.6	16.4
2	11690.00	39.5 AV	54.0	-14.5	2.03 V	185	23.1	16.4
3	#17535.00	55.1 PK	88.2	-33.1	1.55 V	56	33.0	22.1
4	#17535.00	43.0 AV	68.2	-25.2	1.55 V	56	20.9	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

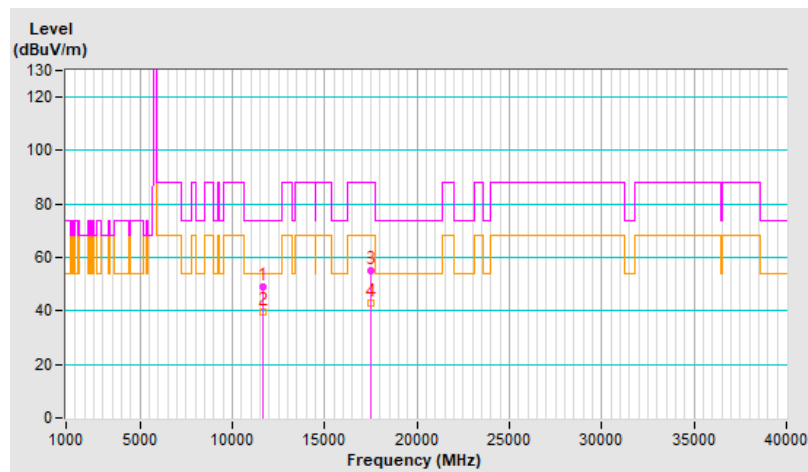


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	3.22 H	57	32.3	16.1
2	11730.00	38.3 AV	54.0	-15.7	3.22 H	57	22.2	16.1
3	#17595.00	53.4 PK	88.2	-34.8	1.40 H	196	31.3	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.40 H	196	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

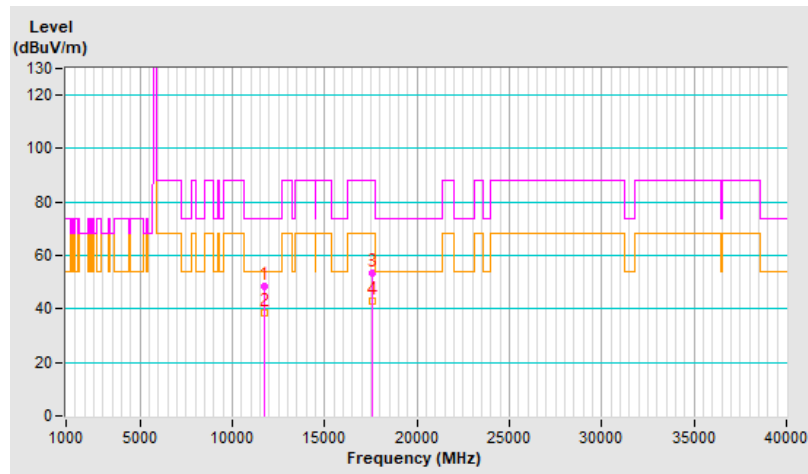


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	2.05 V	190	32.3	16.1
2	11730.00	38.9 AV	54.0	-15.1	2.05 V	190	22.8	16.1
3	#17595.00	55.1 PK	88.2	-33.1	1.58 V	70	33.0	22.1
4	#17595.00	42.8 AV	68.2	-25.4	1.58 V	70	20.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

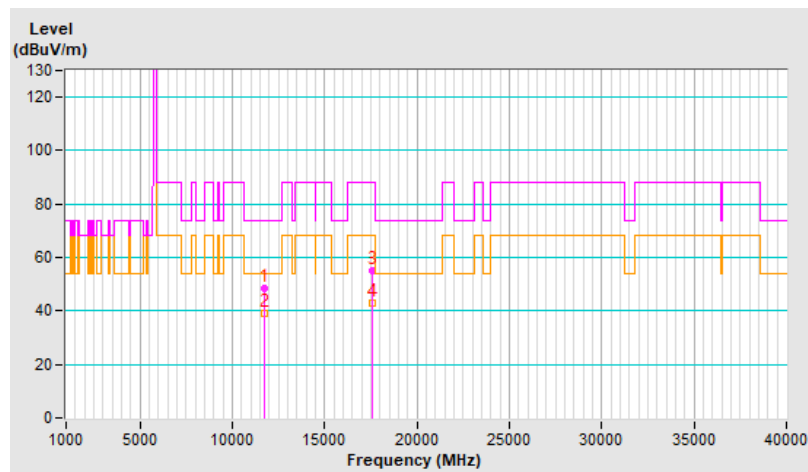


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	3.26 H	61	32.7	16.0
2	11770.00	38.6 AV	54.0	-15.4	3.26 H	61	22.6	16.0
3	#17655.00	52.7 PK	88.2	-35.5	1.44 H	189	29.9	22.8
4	#17655.00	42.3 AV	68.2	-25.9	1.44 H	189	19.5	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

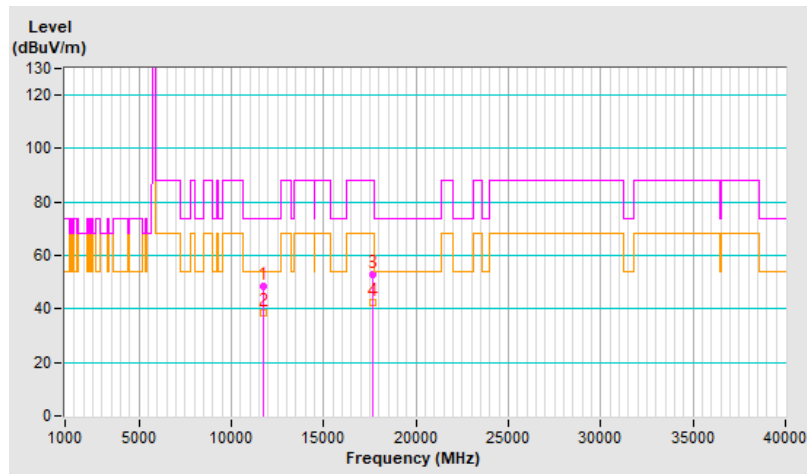


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	2.03 V	199	32.3	16.0
2	11770.00	38.8 AV	54.0	-15.2	2.03 V	199	22.8	16.0
3	#17655.00	54.8 PK	88.2	-33.4	1.60 V	42	32.0	22.8
4	#17655.00	42.6 AV	68.2	-25.6	1.60 V	42	19.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

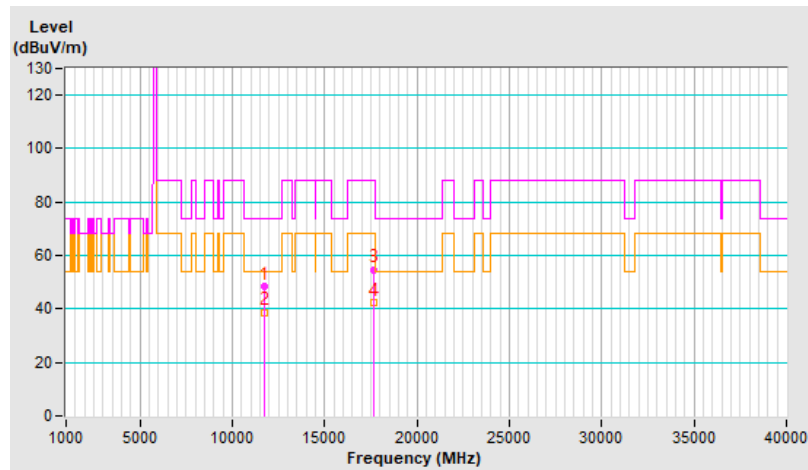


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11670.00	48.2 PK	74.0	-25.8	3.25 H	48	31.8	16.4
2	11670.00	38.3 AV	54.0	-15.7	3.25 H	48	21.9	16.4
3	#17505.00	53.2 PK	88.2	-35.0	1.47 H	208	31.2	22.0
4	#17505.00	42.8 AV	68.2	-25.4	1.47 H	208	20.8	22.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

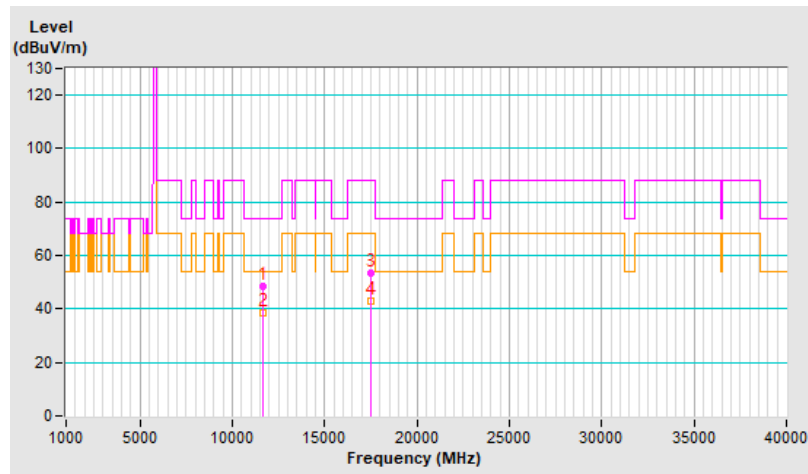


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	48.2 PK	74.0	-25.8	2.03 V	187	31.8	16.4
2	11670.00	38.8 AV	54.0	-15.2	2.03 V	187	22.4	16.4
3	#17505.00	55.3 PK	88.2	-32.9	1.53 V	55	33.3	22.0
4	#17505.00	42.7 AV	68.2	-25.5	1.53 V	55	20.7	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

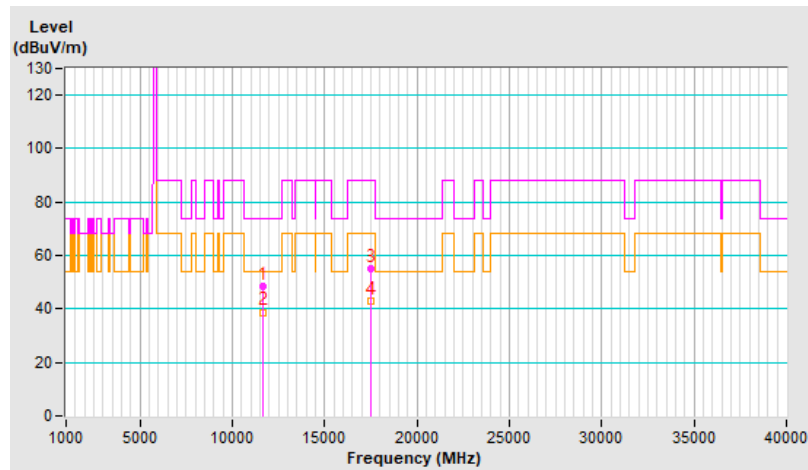


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11750.00	48.4 PK	74.0	-25.6	3.22 H	51	32.4	16.0
2	11750.00	38.3 AV	54.0	-15.7	3.22 H	51	22.3	16.0
3	#17625.00	52.5 PK	88.2	-35.7	1.53 H	215	30.1	22.4
4	#17625.00	42.1 AV	68.2	-26.1	1.53 H	215	19.7	22.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

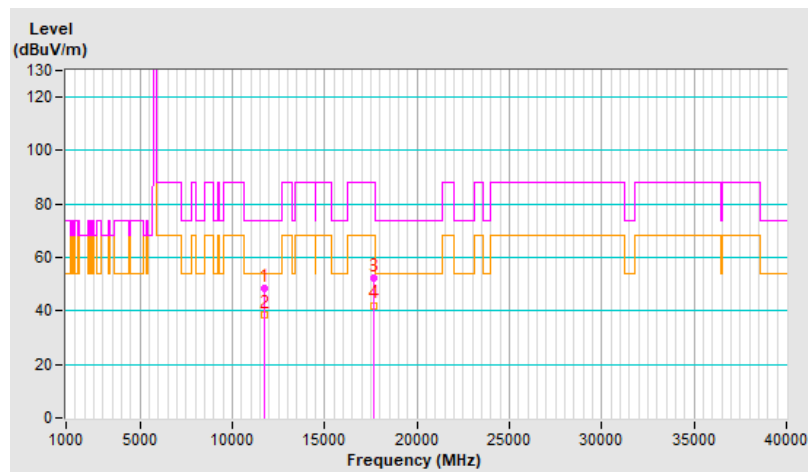


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	48.7 PK	74.0	-25.3	2.07 V	192	32.7	16.0
2	11750.00	39.3 AV	54.0	-14.7	2.07 V	192	23.3	16.0
3	#17625.00	55.2 PK	88.2	-33.0	1.51 V	33	32.8	22.4
4	#17625.00	43.3 AV	68.2	-24.9	1.51 V	33	20.9	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

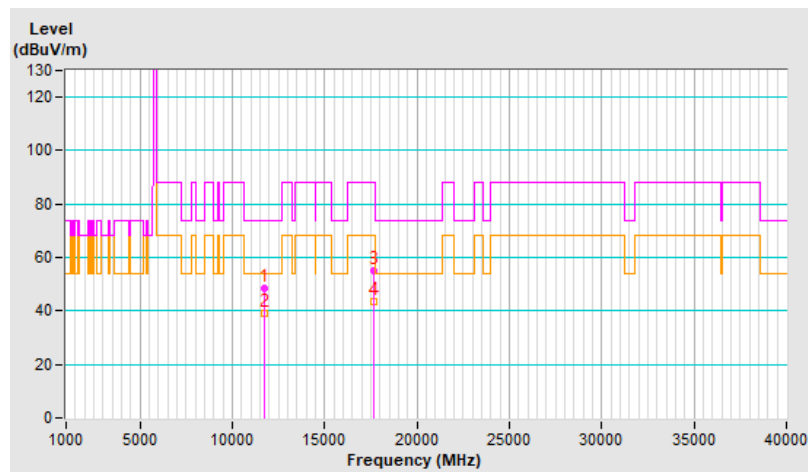


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	47.9 PK	74.0	-26.1	3.23 H	47	31.6	16.3
2	11710.00	38.3 AV	54.0	-15.7	3.23 H	47	22.0	16.3
3	#17565.00	52.4 PK	88.2	-35.8	1.48 H	216	30.3	22.1
4	#17565.00	42.2 AV	68.2	-26.0	1.48 H	216	20.1	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

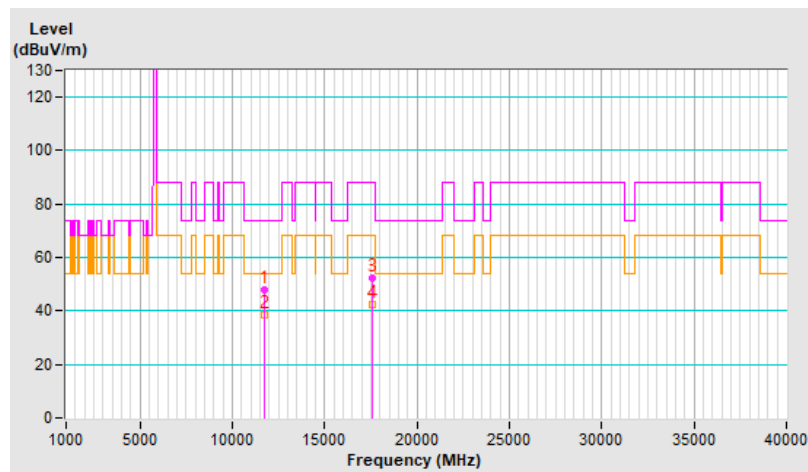


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	48.9 PK	74.0	-25.1	2.01 V	181	32.6	16.3
2	11710.00	39.6 AV	54.0	-14.4	2.01 V	181	23.3	16.3
3	#17565.00	55.3 PK	88.2	-32.9	1.49 V	44	33.2	22.1
4	#17565.00	43.2 AV	68.2	-25.0	1.49 V	44	21.1	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

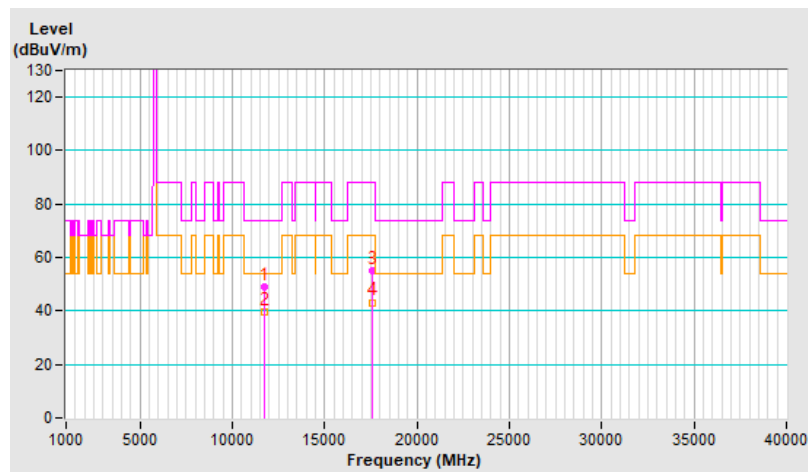


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.2 PK	74.0	-25.8	3.21 H	55	31.7	16.5
2	11630.00	38.4 AV	54.0	-15.6	3.21 H	55	21.9	16.5
3	#17445.00	52.5 PK	88.2	-35.7	1.50 H	208	30.6	21.9
4	#17445.00	42.2 AV	68.2	-26.0	1.50 H	208	20.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

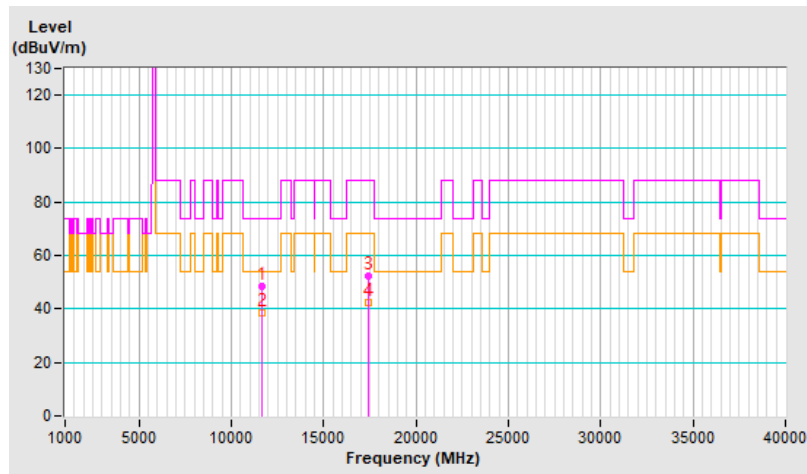


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.7 PK	74.0	-25.3	2.03 V	184	32.2	16.5
2	11630.00	39.4 AV	54.0	-14.6	2.03 V	184	22.9	16.5
3	#17445.00	55.6 PK	88.2	-32.6	1.51 V	43	33.7	21.9
4	#17445.00	43.3 AV	68.2	-24.9	1.51 V	43	21.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

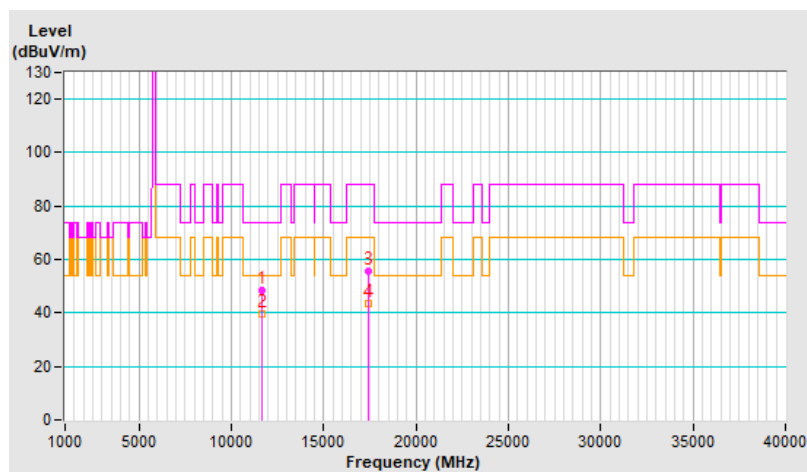


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.28 H	45	32.2	16.4
2	11690.00	38.9 AV	54.0	-15.1	3.28 H	45	22.5	16.4
3	#17535.00	52.5 PK	88.2	-35.7	1.41 H	193	30.4	22.1
4	#17535.00	42.8 AV	68.2	-25.4	1.41 H	193	20.7	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

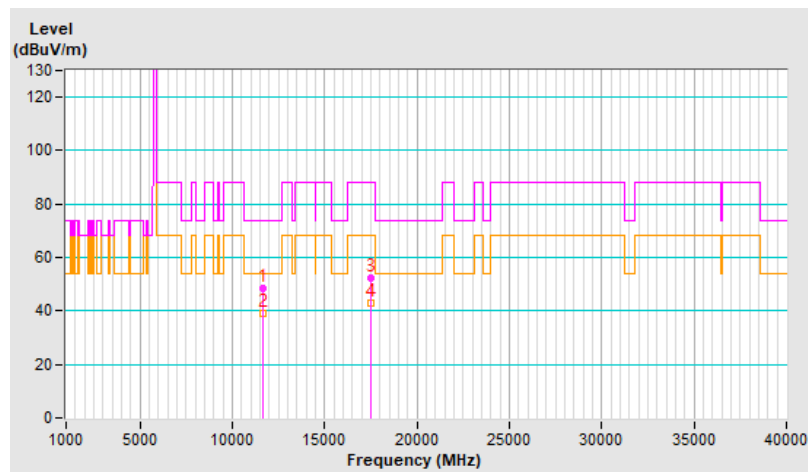


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	2.08 V	200	32.1	16.4
2	11690.00	38.5 AV	54.0	-15.5	2.08 V	200	22.1	16.4
3	#17535.00	53.7 PK	88.2	-34.5	1.58 V	57	31.6	22.1
4	#17535.00	43.0 AV	68.2	-25.2	1.58 V	57	20.9	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

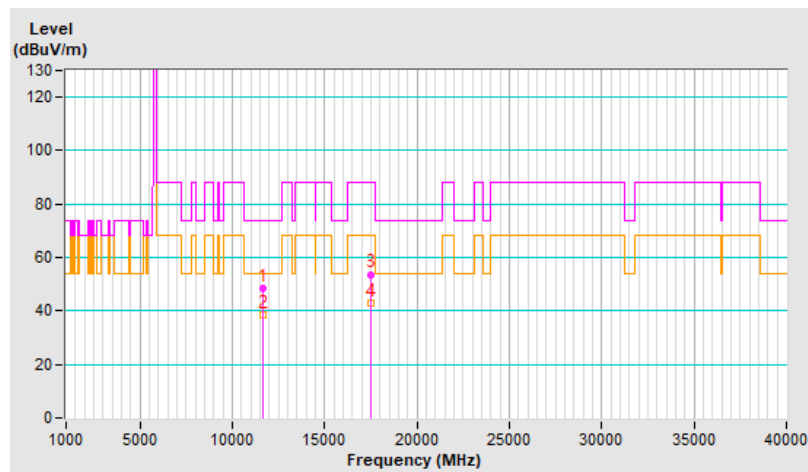


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	3.26 H	43	32.1	16.1
2	11730.00	38.2 AV	54.0	-15.8	3.26 H	43	22.1	16.1
3	#17595.00	53.2 PK	88.2	-35.0	1.48 H	201	31.1	22.1
4	#17595.00	43.2 AV	68.2	-25.0	1.48 H	201	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

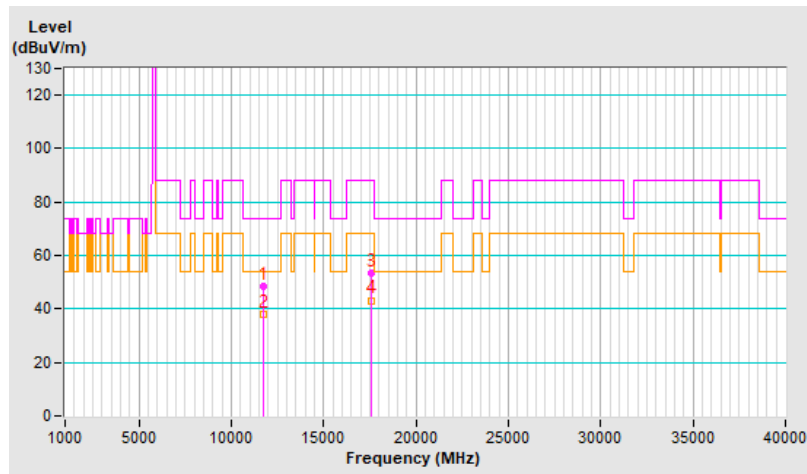


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	49.0 PK	74.0	-25.0	2.14 V	201	32.9	16.1
2	11730.00	38.9 AV	54.0	-15.1	2.14 V	201	22.8	16.1
3	#17595.00	53.4 PK	88.2	-34.8	1.55 V	69	31.3	22.1
4	#17595.00	42.5 AV	68.2	-25.7	1.55 V	69	20.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

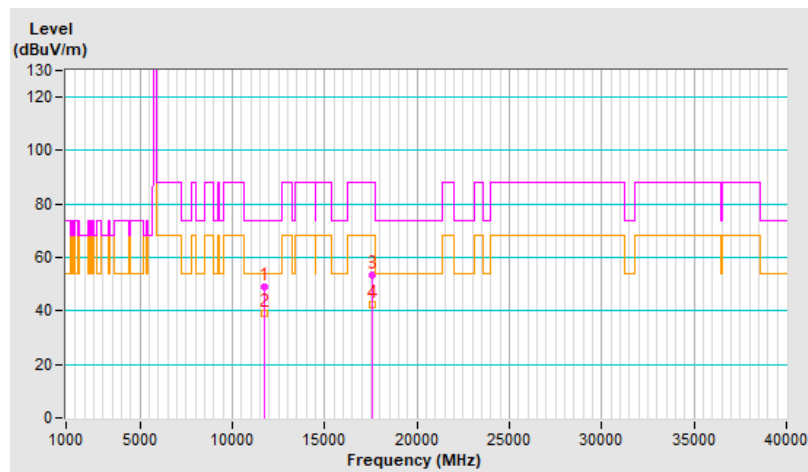


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	3.24 H	49	32.2	16.0
2	11770.00	38.2 AV	54.0	-15.8	3.24 H	49	22.2	16.0
3	#17655.00	52.6 PK	88.2	-35.6	1.39 H	208	29.8	22.8
4	#17655.00	42.7 AV	68.2	-25.5	1.39 H	208	19.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

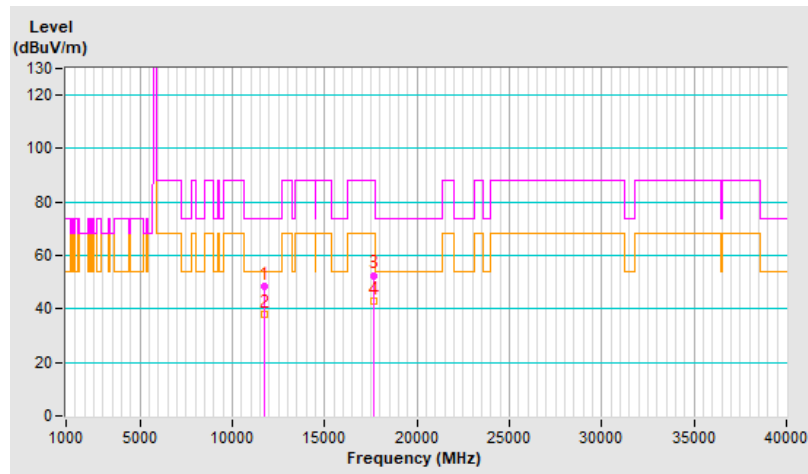


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.0 PK	74.0	-25.0	2.09 V	186	33.0	16.0
2	11770.00	38.8 AV	54.0	-15.2	2.09 V	186	22.8	16.0
3	#17655.00	53.9 PK	88.2	-34.3	1.61 V	47	31.1	22.8
4	#17655.00	43.0 AV	68.2	-25.2	1.61 V	47	20.2	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

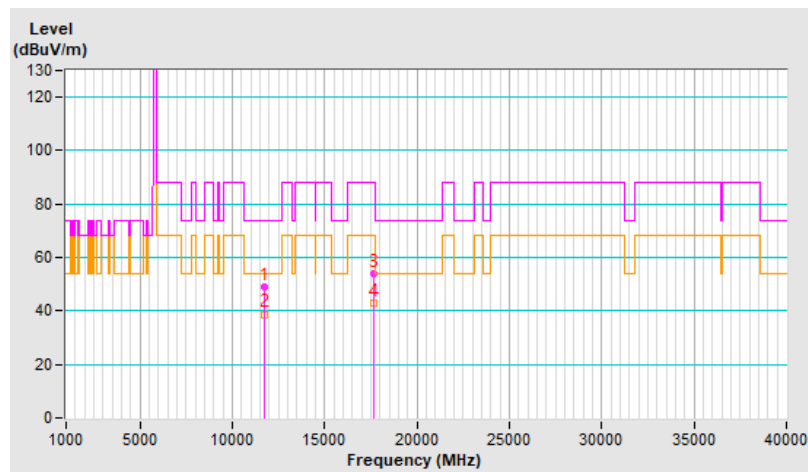


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.20 H	49	32.1	16.4
2	11690.00	38.8 AV	54.0	-15.2	3.20 H	49	22.4	16.4
3	#17535.00	53.0 PK	88.2	-35.2	1.45 H	191	30.9	22.1
4	#17535.00	43.2 AV	68.2	-25.0	1.45 H	191	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

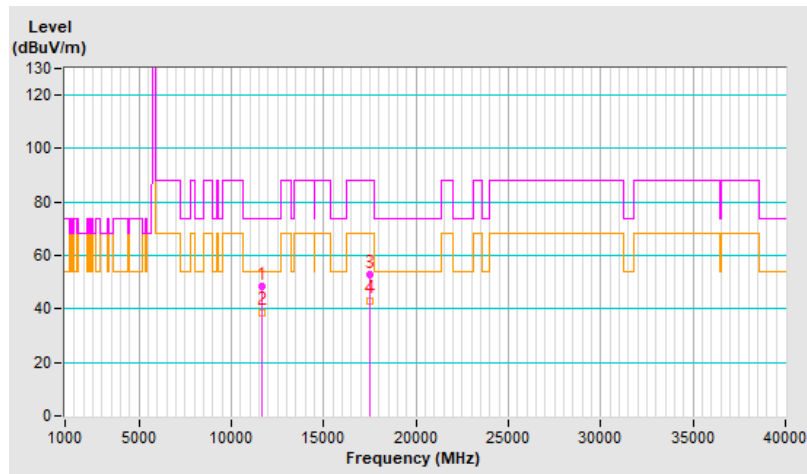


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	2.02 V	195	32.0	16.4
2	11690.00	38.6 AV	54.0	-15.4	2.02 V	195	22.2	16.4
3	#17535.00	53.9 PK	88.2	-34.3	1.54 V	72	31.8	22.1
4	#17535.00	43.3 AV	68.2	-24.9	1.54 V	72	21.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

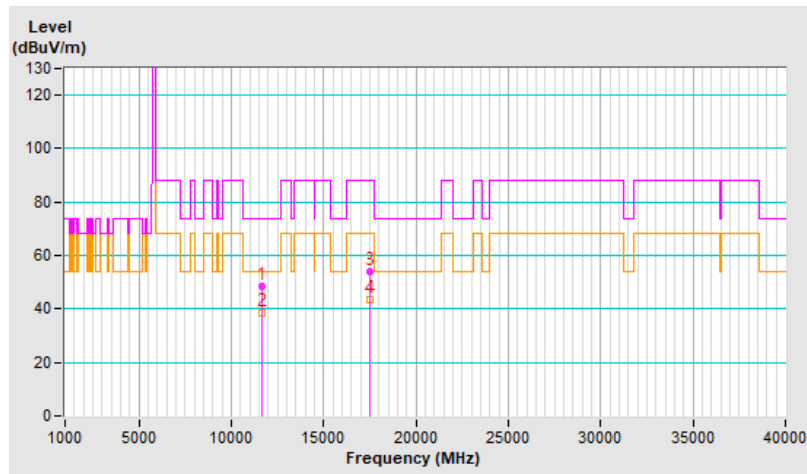


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.25 H	69	32.8	16.1
2	11730.00	38.8 AV	54.0	-15.2	3.25 H	69	22.7	16.1
3	#17595.00	53.7 PK	88.2	-34.5	1.49 H	190	31.6	22.1
4	#17595.00	43.6 AV	68.2	-24.6	1.49 H	190	21.5	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

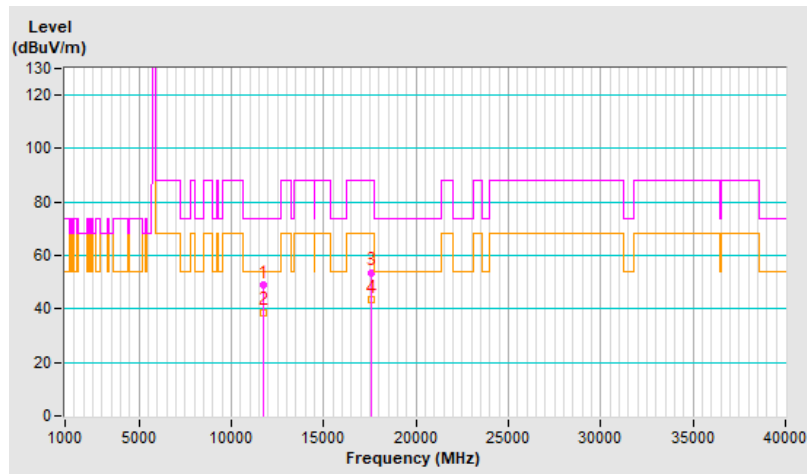


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	2.04 V	200	32.8	16.1
2	11730.00	38.9 AV	54.0	-15.1	2.04 V	200	22.8	16.1
3	#17595.00	53.3 PK	88.2	-34.9	1.56 V	64	31.2	22.1
4	#17595.00	42.8 AV	68.2	-25.4	1.56 V	64	20.7	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

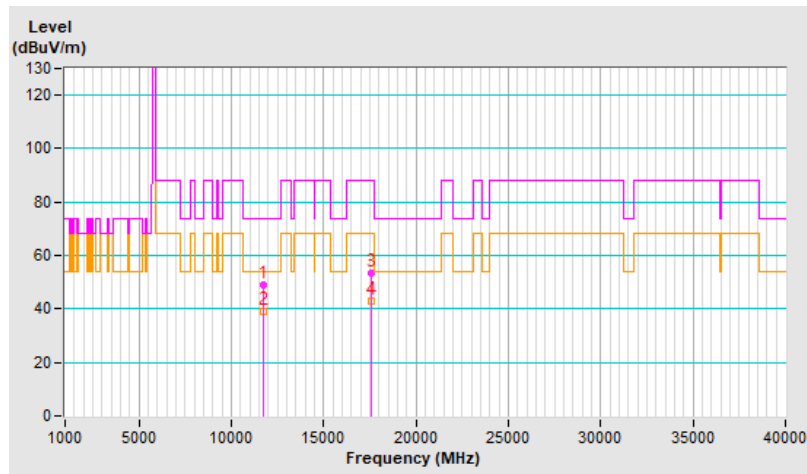


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	3.19 H	52	32.7	16.0
2	11770.00	38.6 AV	54.0	-15.4	3.19 H	52	22.6	16.0
3	#17655.00	53.1 PK	88.2	-35.1	1.41 H	198	30.3	22.8
4	#17655.00	43.0 AV	68.2	-25.2	1.41 H	198	20.2	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

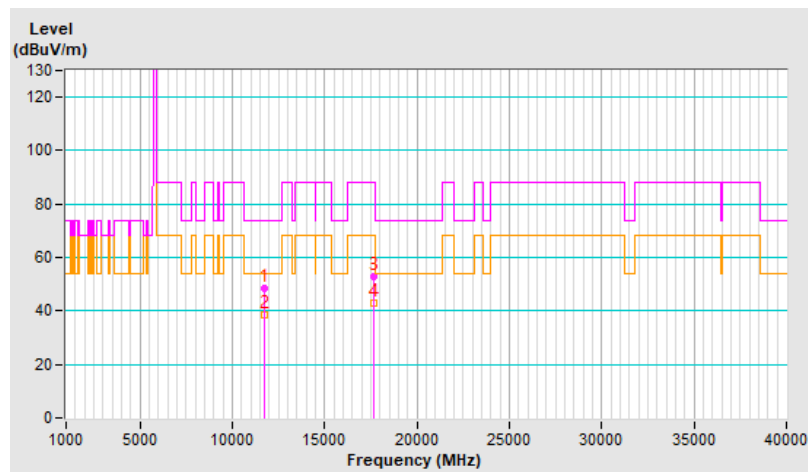


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	2.09 V	215	32.6	16.0
2	11770.00	38.5 AV	54.0	-15.5	2.09 V	215	22.5	16.0
3	#17655.00	54.4 PK	88.2	-33.8	1.59 V	70	31.6	22.8
4	#17655.00	43.4 AV	68.2	-24.8	1.59 V	70	20.6	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

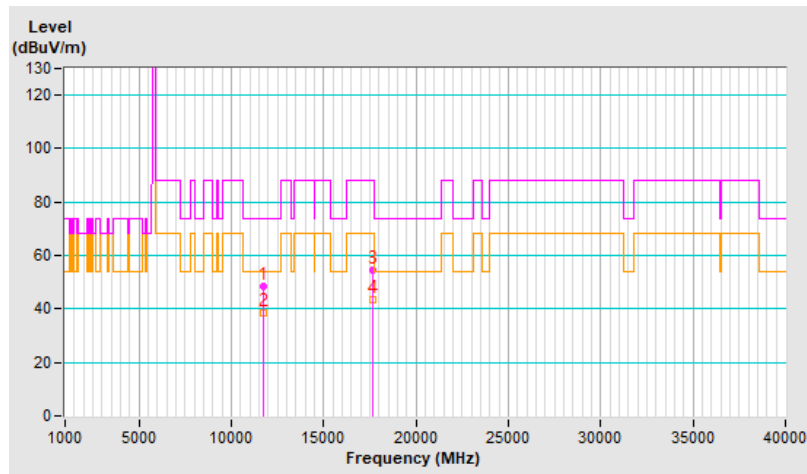


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.4 PK	74.0	-25.6	3.30 H	45	32.0	16.4
2	11690.00	38.5 AV	54.0	-15.5	3.30 H	45	22.1	16.4
3	#17535.00	53.0 PK	88.2	-35.2	1.47 H	192	30.9	22.1
4	#17535.00	43.4 AV	68.2	-24.8	1.47 H	192	21.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

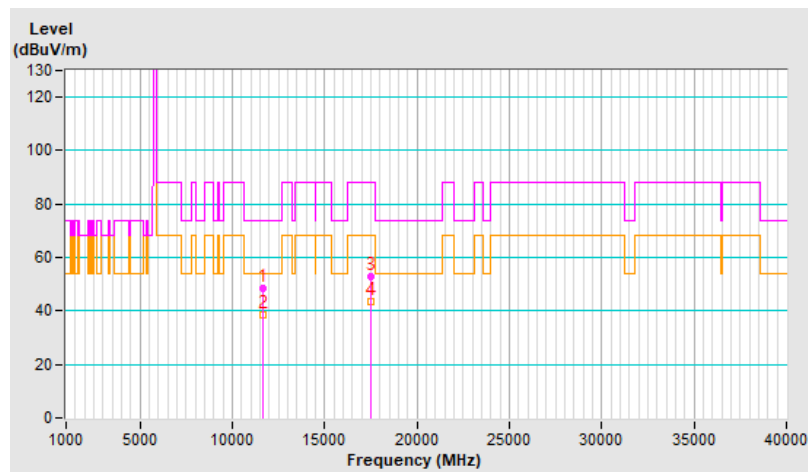


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.0 PK	74.0	-26.0	2.03 V	185	31.6	16.4
2	11690.00	38.0 AV	54.0	-16.0	2.03 V	185	21.6	16.4
3	#17535.00	53.8 PK	88.2	-34.4	1.57 V	72	31.7	22.1
4	#17535.00	43.1 AV	68.2	-25.1	1.57 V	72	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

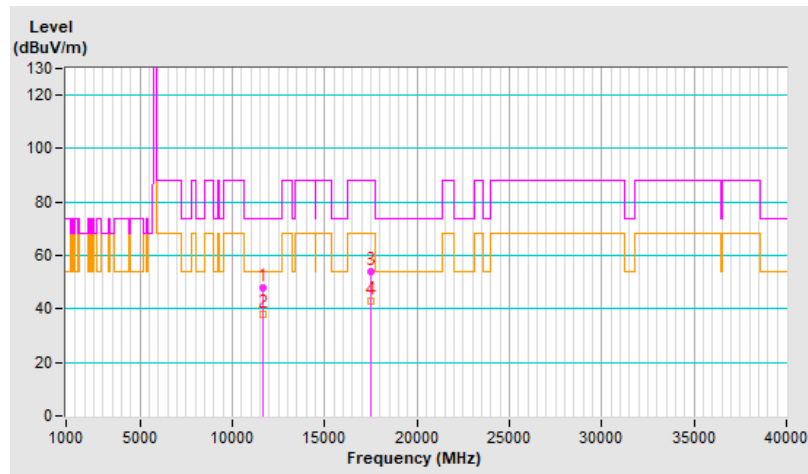


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.7 PK	74.0	-25.3	3.21 H	63	32.6	16.1
2	11730.00	38.6 AV	54.0	-15.4	3.21 H	63	22.5	16.1
3	#17595.00	52.8 PK	88.2	-35.4	1.46 H	197	30.7	22.1
4	#17595.00	42.9 AV	68.2	-25.3	1.46 H	197	20.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

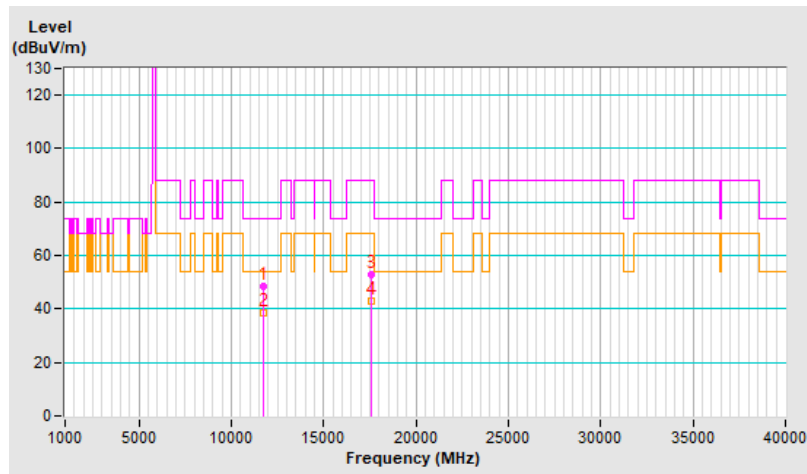


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	2.04 V	194	32.0	16.1
2	11730.00	38.2 AV	54.0	-15.8	2.04 V	194	22.1	16.1
3	#17595.00	53.1 PK	88.2	-35.1	1.54 V	69	31.0	22.1
4	#17595.00	42.5 AV	68.2	-25.7	1.54 V	69	20.4	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

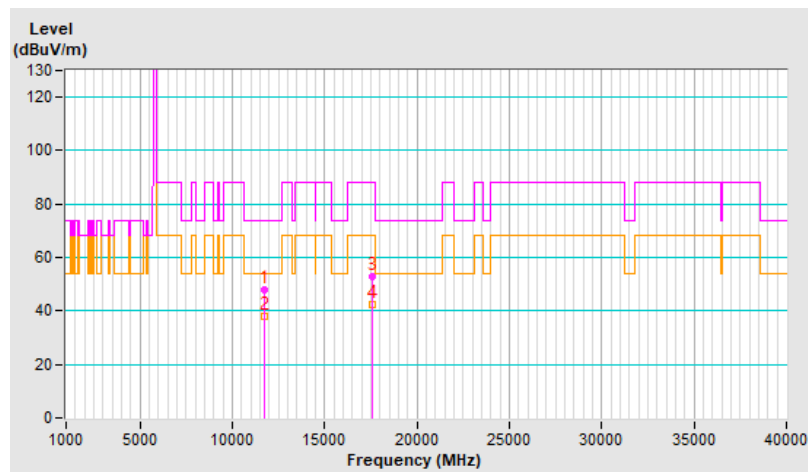


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	3.29 H	66	32.3	16.0
2	11770.00	38.3 AV	54.0	-15.7	3.29 H	66	22.3	16.0
3	#17655.00	52.7 PK	88.2	-35.5	1.49 H	202	29.9	22.8
4	#17655.00	43.0 AV	68.2	-25.2	1.49 H	202	20.2	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

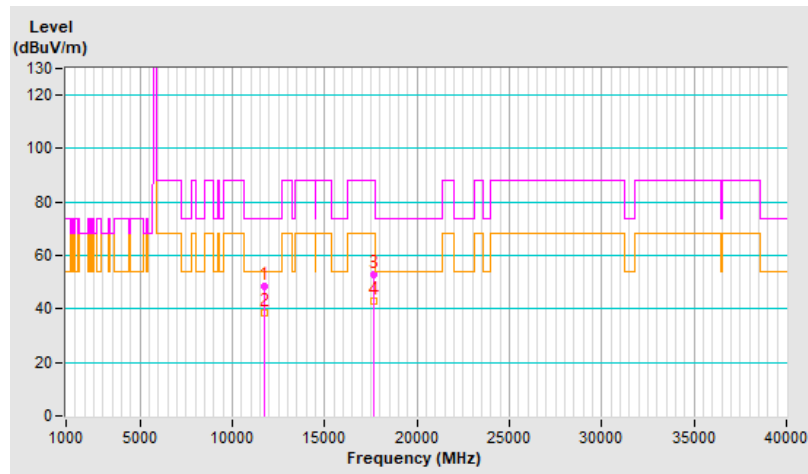


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	2.04 V	198	32.6	16.0
2	11770.00	38.3 AV	54.0	-15.7	2.04 V	198	22.3	16.0
3	#17655.00	54.1 PK	88.2	-34.1	1.59 V	53	31.3	22.8
4	#17655.00	43.1 AV	68.2	-25.1	1.59 V	53	20.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

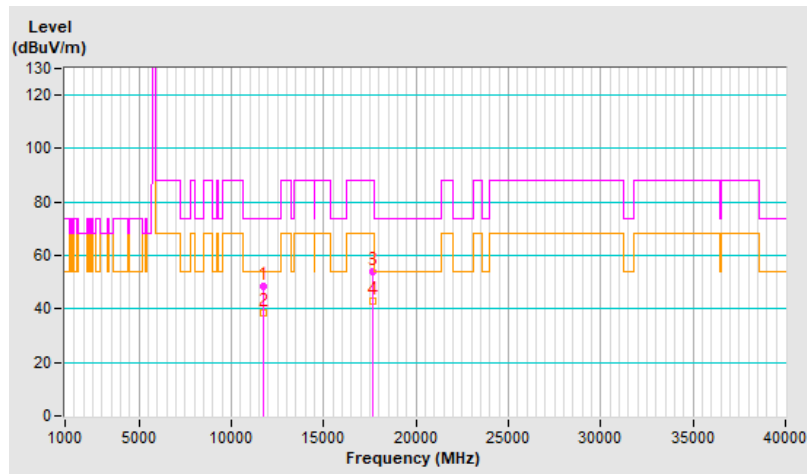


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	49.2 PK	74.0	-24.8	3.29 H	50	32.8	16.4
2	11690.00	39.1 AV	54.0	-14.9	3.29 H	50	22.7	16.4
3	#17535.00	52.7 PK	88.2	-35.5	1.44 H	194	30.6	22.1
4	#17535.00	42.8 AV	68.2	-25.4	1.44 H	194	20.7	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

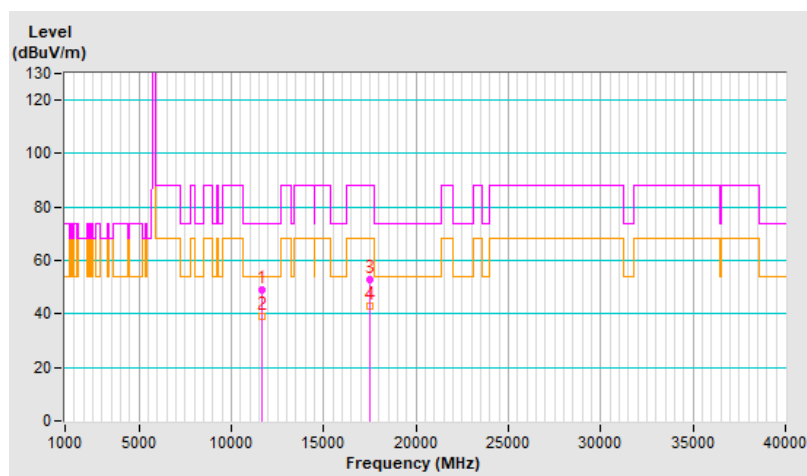


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	47.9 PK	74.0	-26.1	2.03 V	199	31.5	16.4
2	11690.00	38.0 AV	54.0	-16.0	2.03 V	199	21.6	16.4
3	#17535.00	53.5 PK	88.2	-34.7	1.56 V	72	31.4	22.1
4	#17535.00	42.5 AV	68.2	-25.7	1.56 V	72	20.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

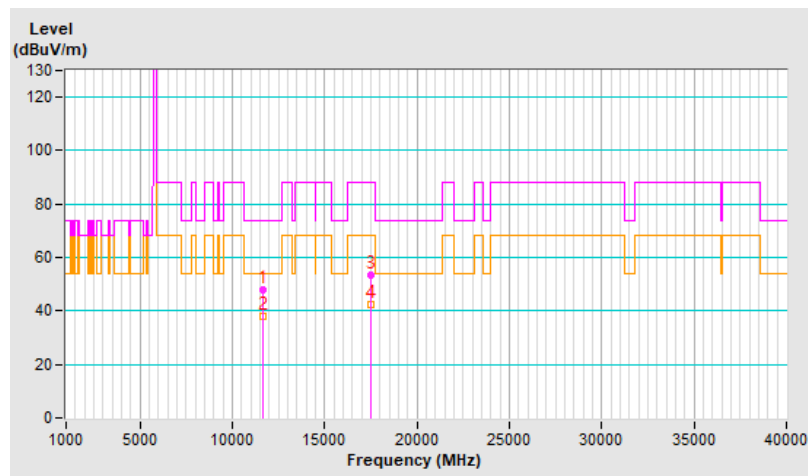


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.0 PK	74.0	-26.0	3.20 H	56	31.9	16.1
2	11730.00	38.3 AV	54.0	-15.7	3.20 H	56	22.2	16.1
3	#17595.00	53.2 PK	88.2	-35.0	1.50 H	199	31.1	22.1
4	#17595.00	43.6 AV	68.2	-24.6	1.50 H	199	21.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

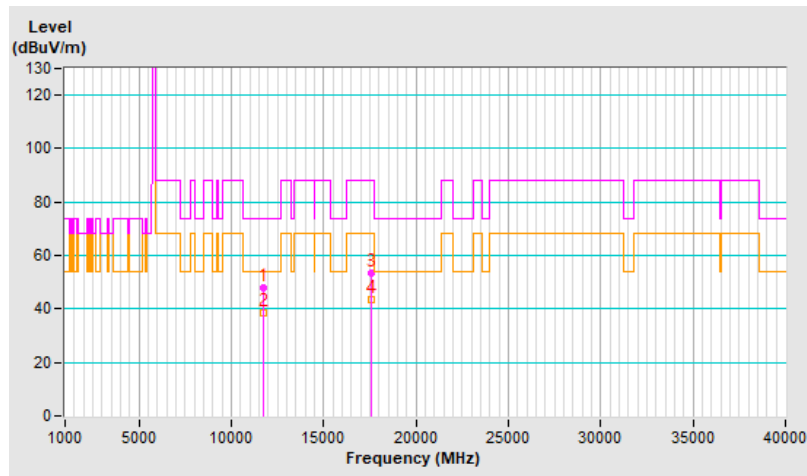


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	2.02 V	202	32.3	16.1
2	11730.00	38.2 AV	54.0	-15.8	2.02 V	202	22.1	16.1
3	#17595.00	53.6 PK	88.2	-34.6	1.59 V	53	31.5	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.59 V	53	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

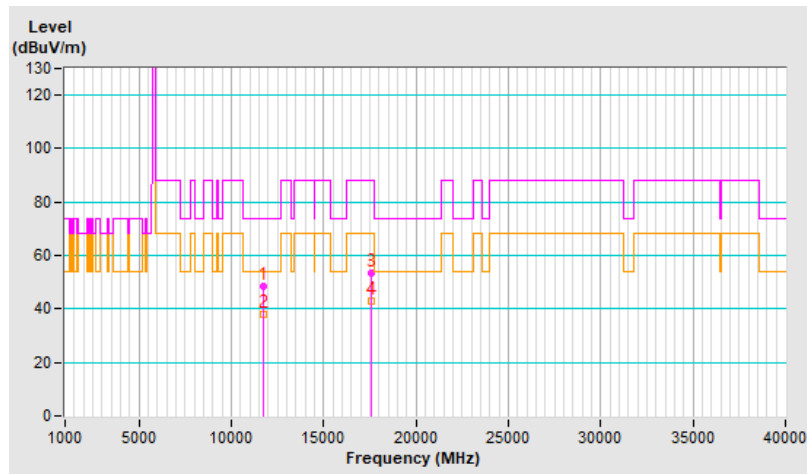


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.9 PK	74.0	-25.1	3.27 H	65	32.9	16.0
2	11770.00	39.2 AV	54.0	-14.8	3.27 H	65	23.2	16.0
3	#17655.00	52.7 PK	88.2	-35.5	1.42 H	208	29.9	22.8
4	#17655.00	42.7 AV	68.2	-25.5	1.42 H	208	19.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

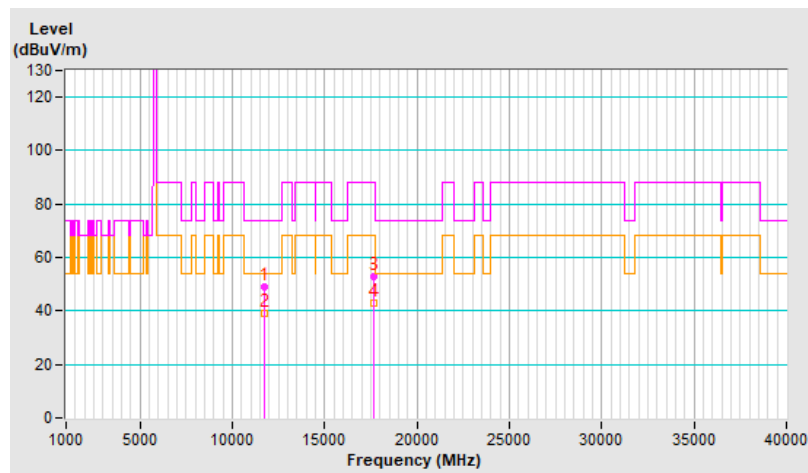


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	2.06 V	207	32.5	16.0
2	11770.00	38.5 AV	54.0	-15.5	2.06 V	207	22.5	16.0
3	#17655.00	54.3 PK	88.2	-33.9	1.57 V	70	31.5	22.8
4	#17655.00	43.3 AV	68.2	-24.9	1.57 V	70	20.5	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

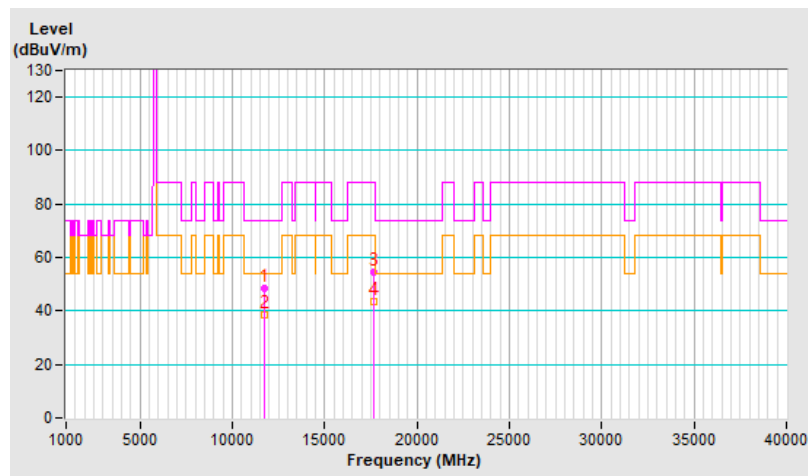


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	49.1 PK	74.0	-24.9	3.21 H	43	32.7	16.4
2	11690.00	39.0 AV	54.0	-15.0	3.21 H	43	22.6	16.4
3	#17535.00	53.0 PK	88.2	-35.2	1.50 H	211	30.9	22.1
4	#17535.00	43.2 AV	68.2	-25.0	1.50 H	211	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

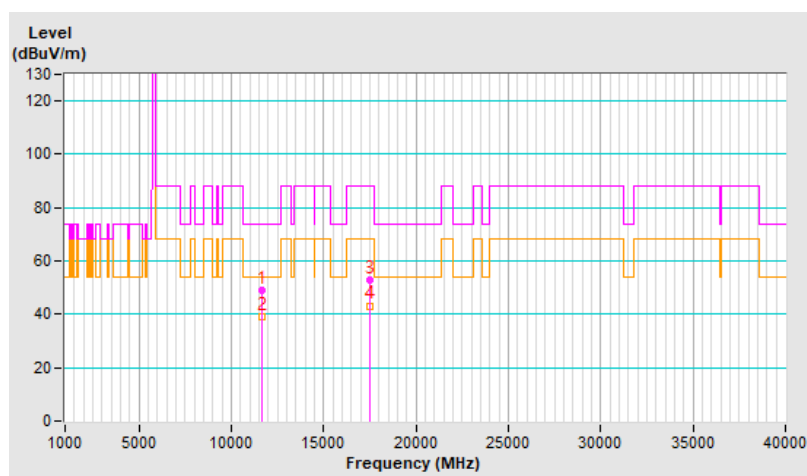


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	2.06 V	198	32.2	16.4
2	11690.00	38.5 AV	54.0	-15.5	2.06 V	198	22.1	16.4
3	#17535.00	54.0 PK	88.2	-34.2	1.58 V	47	31.9	22.1
4	#17535.00	43.2 AV	68.2	-25.0	1.58 V	47	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

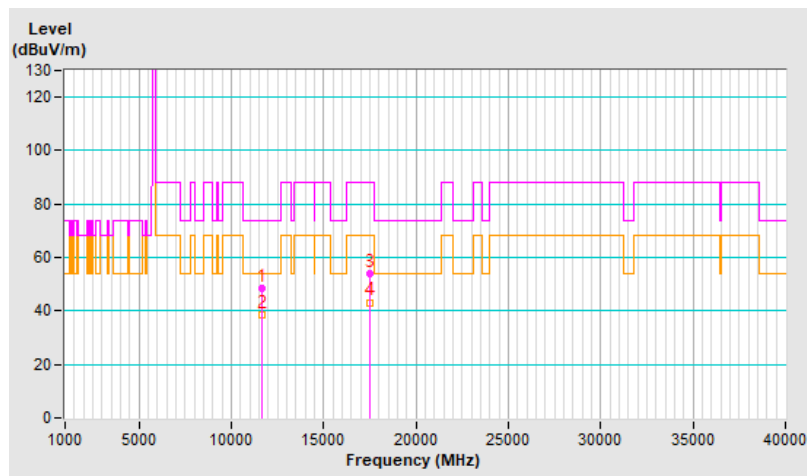


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	3.24 H	47	32.8	16.1
2	11730.00	39.1 AV	54.0	-14.9	3.24 H	47	23.0	16.1
3	#17595.00	52.4 PK	88.2	-35.8	1.43 H	208	30.3	22.1
4	#17595.00	42.7 AV	68.2	-25.5	1.43 H	208	20.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

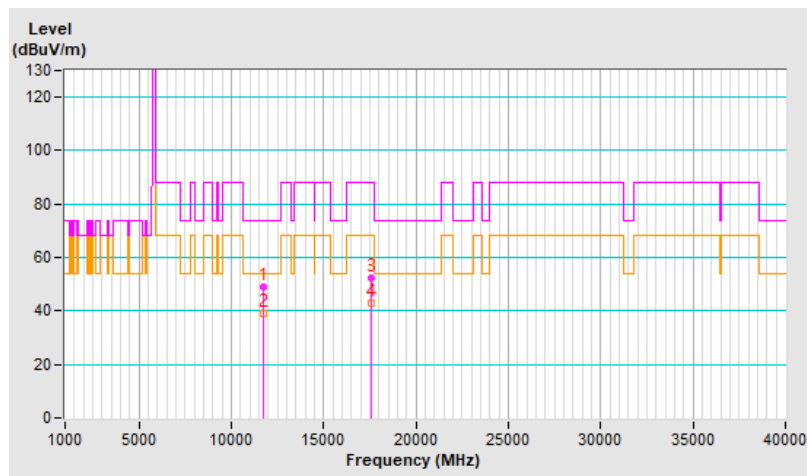


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.8 PK	74.0	-25.2	2.04 V	191	32.7	16.1
2	11730.00	38.7 AV	54.0	-15.3	2.04 V	191	22.6	16.1
3	#17595.00	53.9 PK	88.2	-34.3	1.58 V	67	31.8	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.58 V	67	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

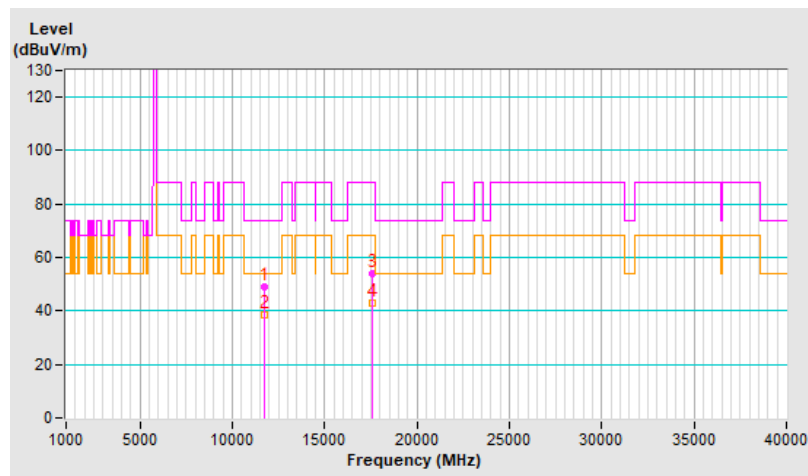


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	49.2 PK	74.0	-24.8	3.19 H	65	33.2	16.0
2	11770.00	39.2 AV	54.0	-14.8	3.19 H	65	23.2	16.0
3	#17655.00	53.8 PK	88.2	-34.4	1.44 H	188	31.0	22.8
4	#17655.00	43.6 AV	68.2	-24.6	1.44 H	188	20.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

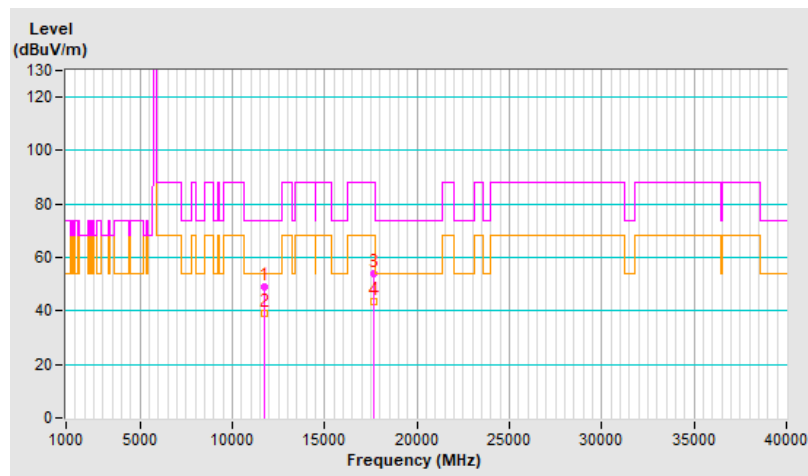


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	2.04 V	196	32.5	16.0
2	11770.00	38.4 AV	54.0	-15.6	2.04 V	196	22.4	16.0
3	#17655.00	53.9 PK	88.2	-34.3	1.57 V	71	31.1	22.8
4	#17655.00	42.9 AV	68.2	-25.3	1.57 V	71	20.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

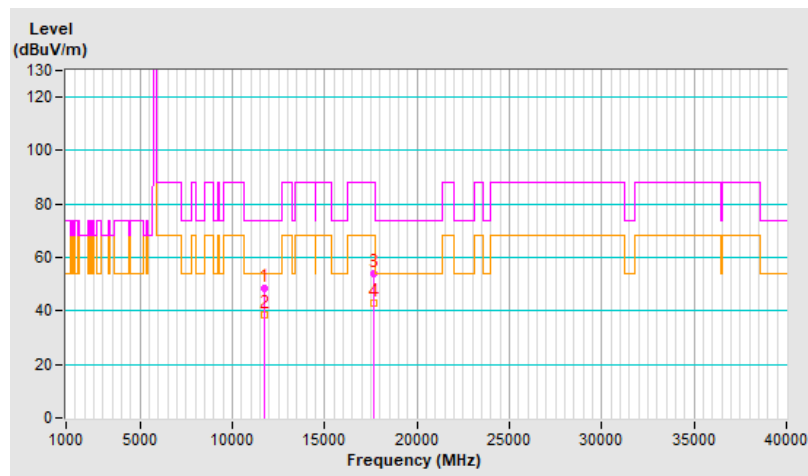


RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.2 PK	74.0	-25.8	3.18 H	47	31.9	16.3
2	11710.00	38.3 AV	54.0	-15.7	3.18 H	47	22.0	16.3
3	#17565.00	53.1 PK	88.2	-35.1	1.42 H	188	31.0	22.1
4	#17565.00	43.3 AV	68.2	-24.9	1.42 H	188	21.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

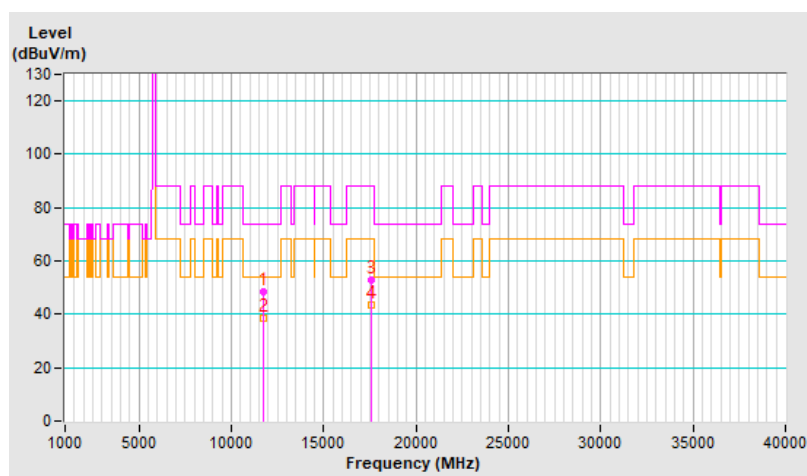


RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.7 PK	74.0	-25.3	2.13 V	195	32.4	16.3
2	11710.00	38.8 AV	54.0	-15.2	2.13 V	195	22.5	16.3
3	#17565.00	53.5 PK	88.2	-34.7	1.60 V	44	31.4	22.1
4	#17565.00	42.6 AV	68.2	-25.6	1.60 V	44	20.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

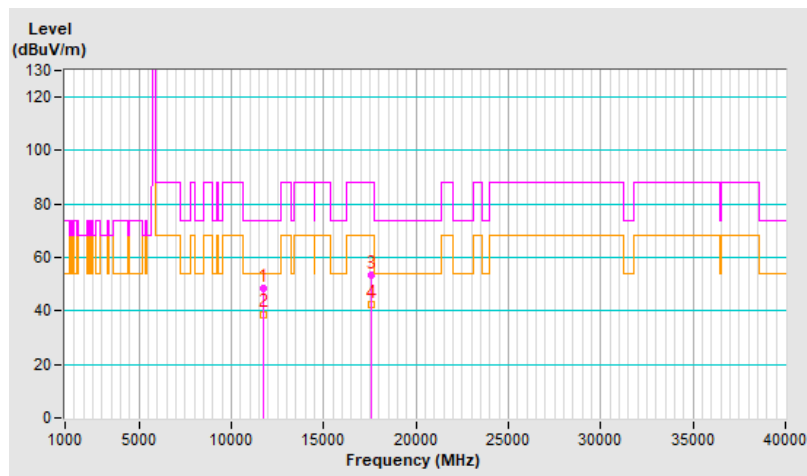


RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.2 PK	74.0	-25.8	3.21 H	47	31.7	16.5
2	11630.00	38.4 AV	54.0	-15.6	3.21 H	47	21.9	16.5
3	#17445.00	52.8 PK	88.2	-35.4	1.50 H	209	30.9	21.9
4	#17445.00	42.9 AV	68.2	-25.3	1.50 H	209	21.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

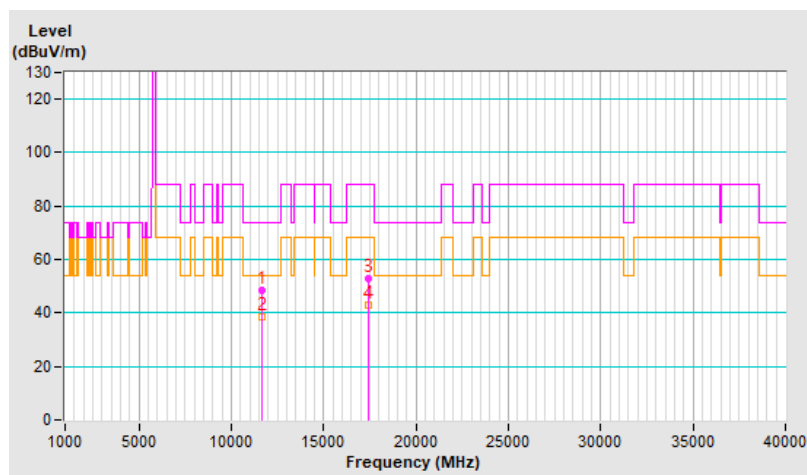


RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.7 PK	74.0	-25.3	2.10 V	195	32.2	16.5
2	11630.00	38.9 AV	54.0	-15.1	2.10 V	195	22.4	16.5
3	#17445.00	53.5 PK	88.2	-34.7	1.61 V	48	31.6	21.9
4	#17445.00	42.9 AV	68.2	-25.3	1.61 V	48	21.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

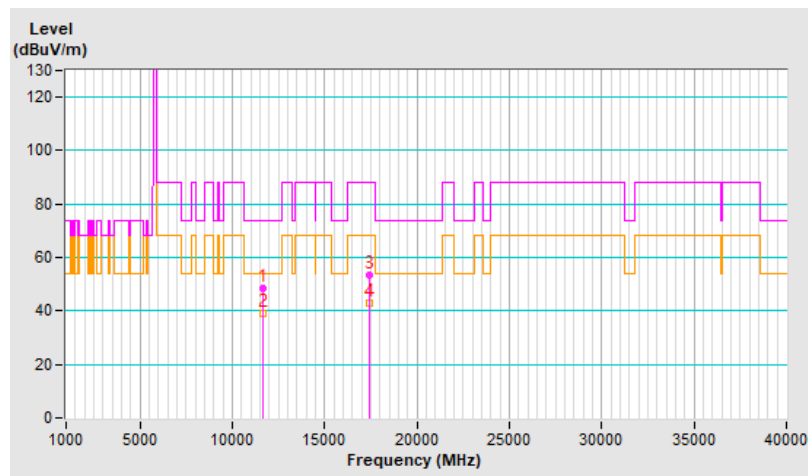


RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.4 PK	74.0	-25.6	3.29 H	46	31.9	16.5
2	11630.00	38.7 AV	54.0	-15.3	3.29 H	46	22.2	16.5
3	#17445.00	52.5 PK	88.2	-35.7	1.41 H	198	30.6	21.9
4	#17445.00	42.7 AV	68.2	-25.5	1.41 H	198	20.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

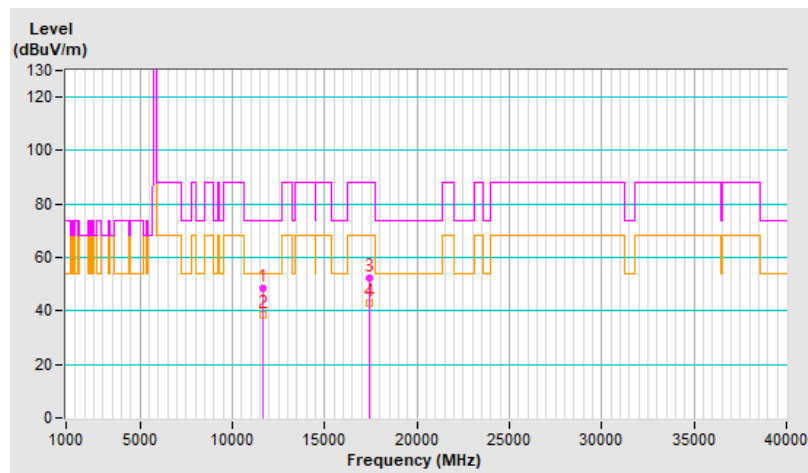


RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 3 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.4 PK	74.0	-25.6	2.07 V	207	31.9	16.5
2	11630.00	38.6 AV	54.0	-15.4	2.07 V	207	22.1	16.5
3	#17445.00	53.8 PK	88.2	-34.4	1.56 V	60	31.9	21.9
4	#17445.00	42.9 AV	68.2	-25.3	1.56 V	60	21.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

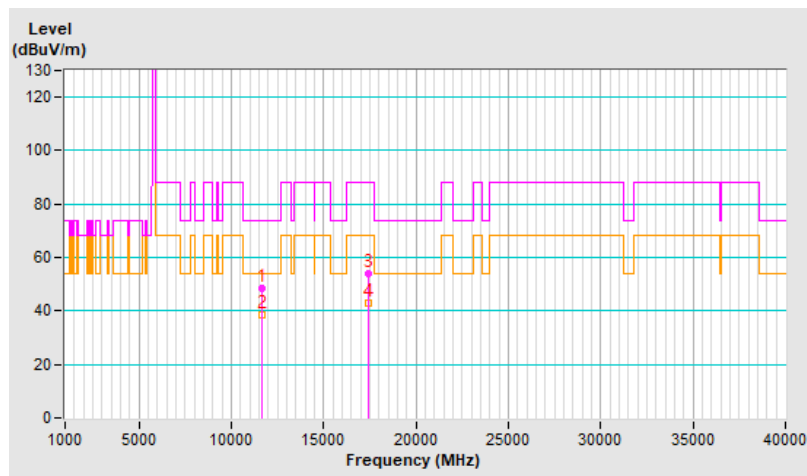


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.26 H	51	32.2	16.4
2	11690.00	38.6 AV	54.0	-15.4	3.26 H	51	22.2	16.4
3	#17535.00	52.8 PK	88.2	-35.4	1.45 H	195	30.7	22.1
4	#17535.00	42.7 AV	68.2	-25.5	1.45 H	195	20.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

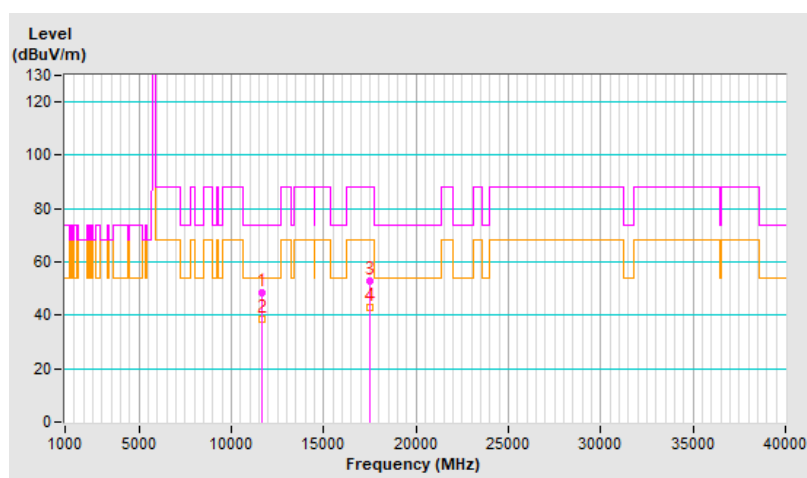


RF Mode	802.11a	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.9 PK	74.0	-25.1	1.97 V	181	32.5	16.4
2	11690.00	38.9 AV	54.0	-15.1	1.97 V	181	22.5	16.4
3	#17535.00	55.1 PK	88.2	-33.1	1.59 V	63	33.0	22.1
4	#17535.00	42.7 AV	68.2	-25.5	1.59 V	63	20.6	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

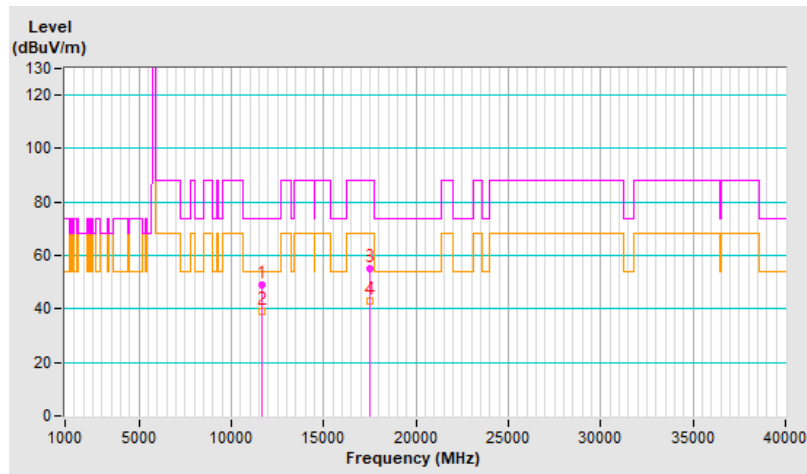


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.6 PK	74.0	-25.4	3.24 H	55	32.5	16.1
2	11730.00	38.7 AV	54.0	-15.3	3.24 H	55	22.6	16.1
3	#17595.00	53.1 PK	88.2	-35.1	1.45 H	195	31.0	22.1
4	#17595.00	43.2 AV	68.2	-25.0	1.45 H	195	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

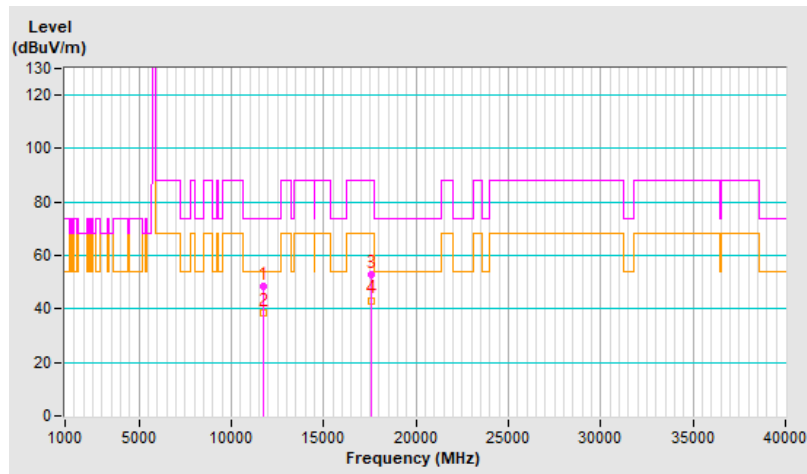


RF Mode	802.11a	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.7 PK	74.0	-25.3	2.03 V	187	32.6	16.1
2	11730.00	38.6 AV	54.0	-15.4	2.03 V	187	22.5	16.1
3	#17595.00	55.5 PK	88.2	-32.7	1.57 V	51	33.4	22.1
4	#17595.00	43.2 AV	68.2	-25.0	1.57 V	51	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

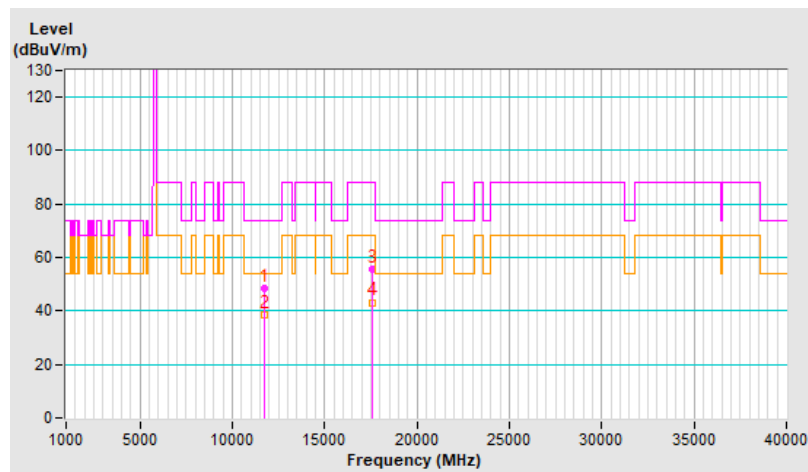


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	3.29 H	59	32.6	16.0
2	11770.00	38.8 AV	54.0	-15.2	3.29 H	59	22.8	16.0
3	#17655.00	53.7 PK	88.2	-34.5	1.45 H	189	30.9	22.8
4	#17655.00	43.6 AV	68.2	-24.6	1.45 H	189	20.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

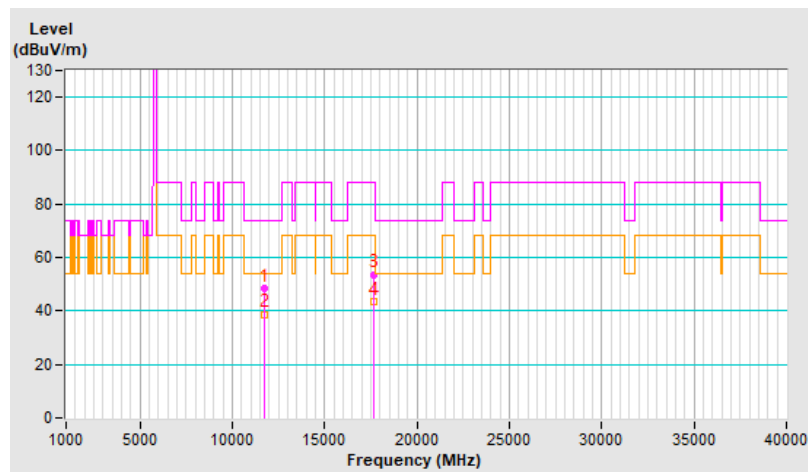


RF Mode	802.11a	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.7 PK	74.0	-25.3	2.08 V	182	32.7	16.0
2	11770.00	38.8 AV	54.0	-15.2	2.08 V	182	22.8	16.0
3	#17655.00	55.3 PK	88.2	-32.9	1.55 V	57	32.5	22.8
4	#17655.00	43.1 AV	68.2	-25.1	1.55 V	57	20.3	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

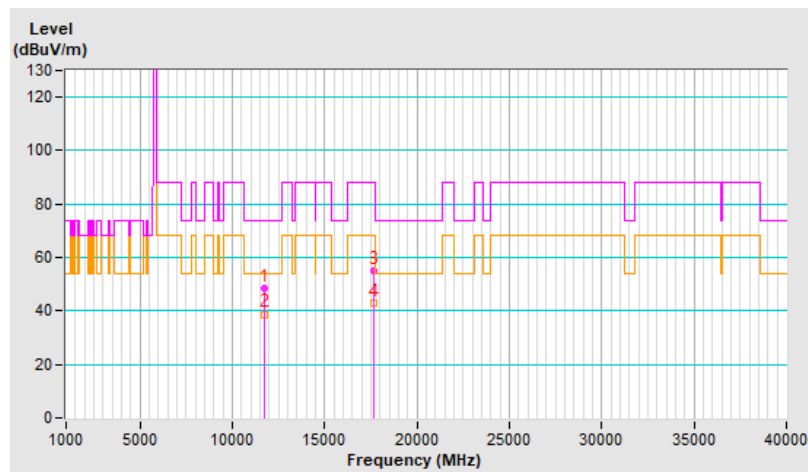


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.8 PK	74.0	-25.2	3.24 H	39	32.4	16.4
2	11690.00	38.8 AV	54.0	-15.2	3.24 H	39	22.4	16.4
3	#17535.00	53.3 PK	88.2	-34.9	1.49 H	186	31.2	22.1
4	#17535.00	43.4 AV	68.2	-24.8	1.49 H	186	21.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

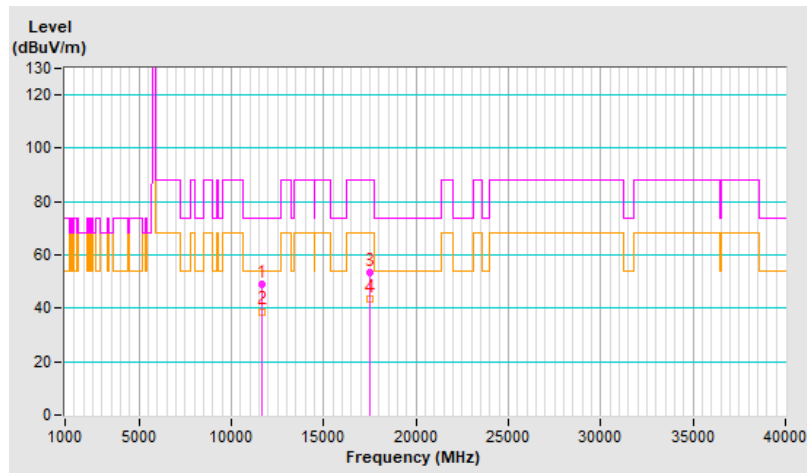


RF Mode	802.11be (EHT20)	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.9 PK	74.0	-25.1	1.95 V	164	32.5	16.4
2	11690.00	38.6 AV	54.0	-15.4	1.95 V	164	22.2	16.4
3	#17535.00	55.7 PK	88.2	-32.5	1.58 V	72	33.6	22.1
4	#17535.00	43.2 AV	68.2	-25.0	1.58 V	72	21.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

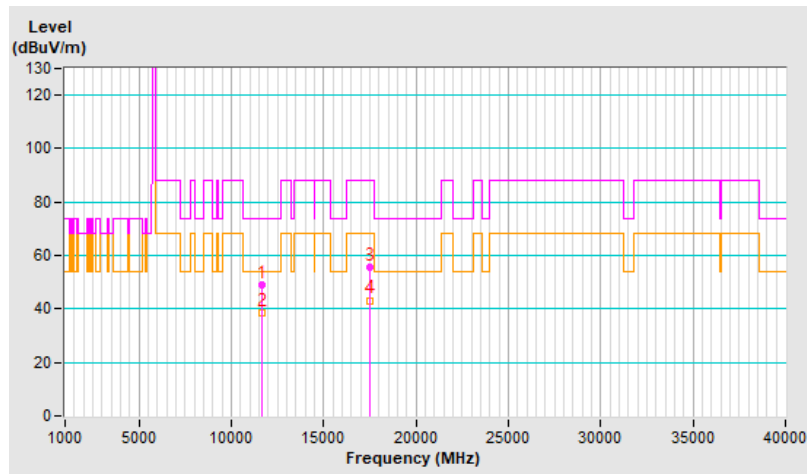


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.6 PK	74.0	-25.4	3.31 H	69	32.5	16.1
2	11730.00	38.3 AV	54.0	-15.7	3.31 H	69	22.2	16.1
3	#17595.00	53.4 PK	88.2	-34.8	1.49 H	165	31.3	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.49 H	165	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

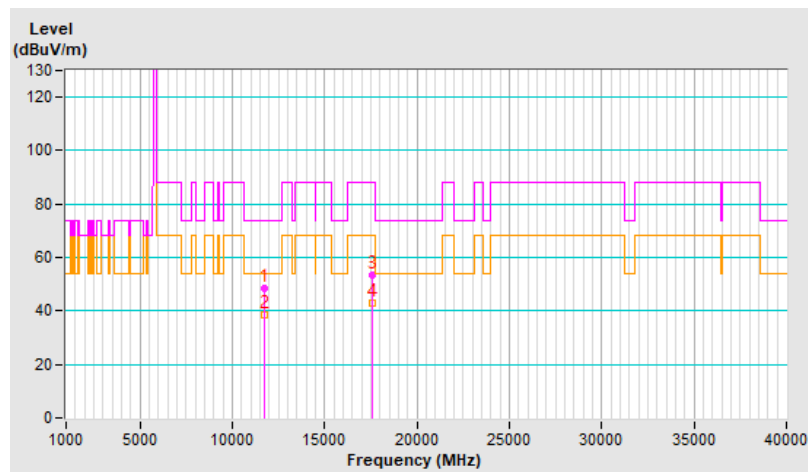


RF Mode	802.11be (EHT20)	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.7 PK	74.0	-25.3	2.00 V	184	32.6	16.1
2	11730.00	38.5 AV	54.0	-15.5	2.00 V	184	22.4	16.1
3	#17595.00	55.6 PK	88.2	-32.6	1.53 V	66	33.5	22.1
4	#17595.00	43.3 AV	68.2	-24.9	1.53 V	66	21.2	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

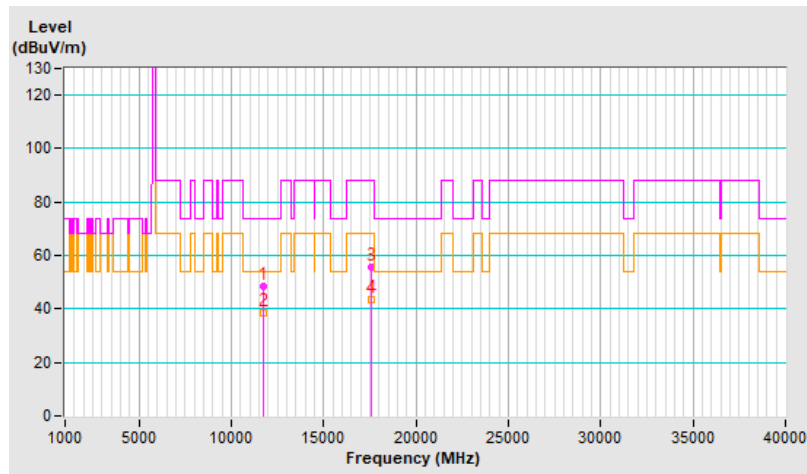


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	3.28 H	46	32.5	16.0
2	11770.00	38.1 AV	54.0	-15.9	3.28 H	46	22.1	16.0
3	#17655.00	53.1 PK	88.2	-35.1	1.49 H	168	30.3	22.8
4	#17655.00	42.9 AV	68.2	-25.3	1.49 H	168	20.1	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

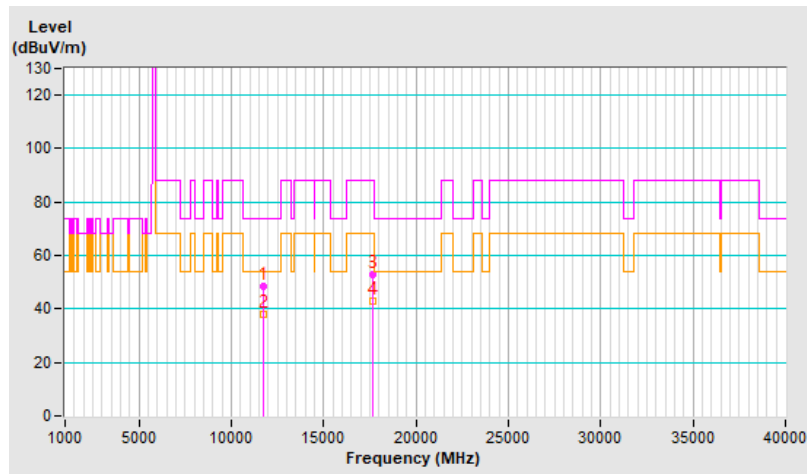


RF Mode	802.11be (EHT20)	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 300 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.6 PK	74.0	-25.4	1.99 V	167	32.6	16.0
2	11770.00	38.6 AV	54.0	-15.4	1.99 V	167	22.6	16.0
3	#17655.00	55.1 PK	88.2	-33.1	1.52 V	72	32.3	22.8
4	#17655.00	42.8 AV	68.2	-25.4	1.52 V	72	20.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

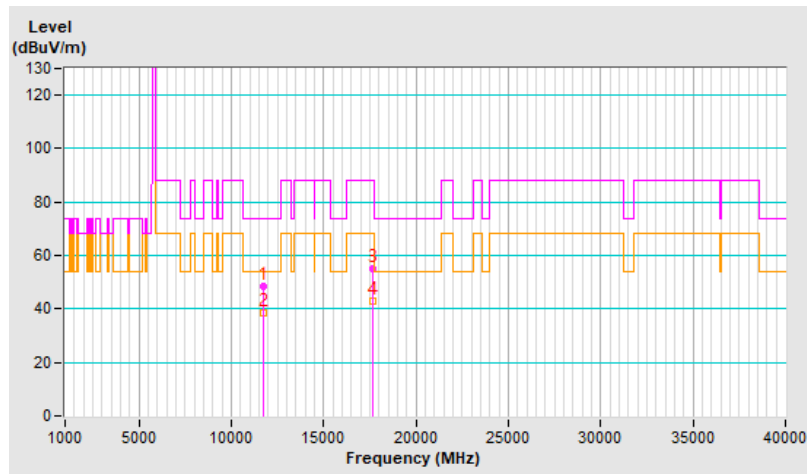


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11670.00	48.5 PK	74.0	-25.5	3.19 H	47	32.1	16.4
2	11670.00	38.1 AV	54.0	-15.9	3.19 H	47	21.7	16.4
3	#17505.00	53.1 PK	88.2	-35.1	1.52 H	170	31.1	22.0
4	#17505.00	43.0 AV	68.2	-25.2	1.52 H	170	21.0	22.0

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

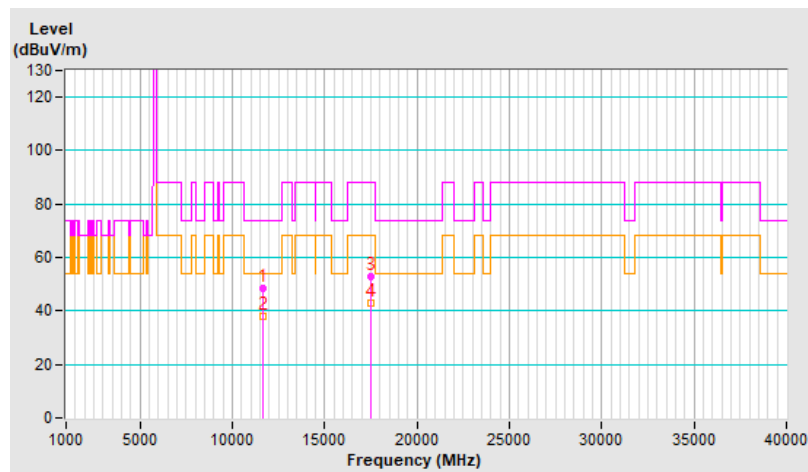


RF Mode	802.11be (EHT40)	Channel	CH 167 : 5835 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11670.00	49.0 PK	74.0	-25.0	1.89 V	160	32.6	16.4
2	11670.00	38.5 AV	54.0	-15.5	1.89 V	160	22.1	16.4
3	#17505.00	55.4 PK	88.2	-32.8	1.58 V	81	33.4	22.0
4	#17505.00	42.8 AV	68.2	-25.4	1.58 V	81	20.8	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

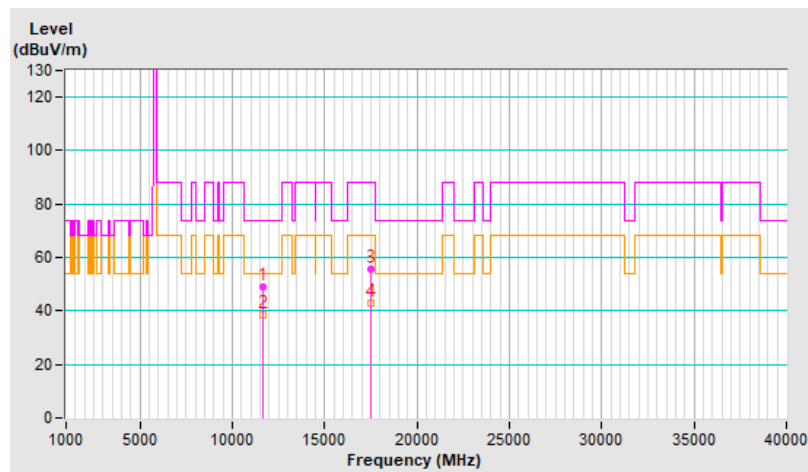


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11750.00	49.0 PK	74.0	-25.0	3.23 H	69	33.0	16.0
2	11750.00	38.7 AV	54.0	-15.3	3.23 H	69	22.7	16.0
3	#17625.00	53.1 PK	88.2	-35.1	1.43 H	187	30.7	22.4
4	#17625.00	43.3 AV	68.2	-24.9	1.43 H	187	20.9	22.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

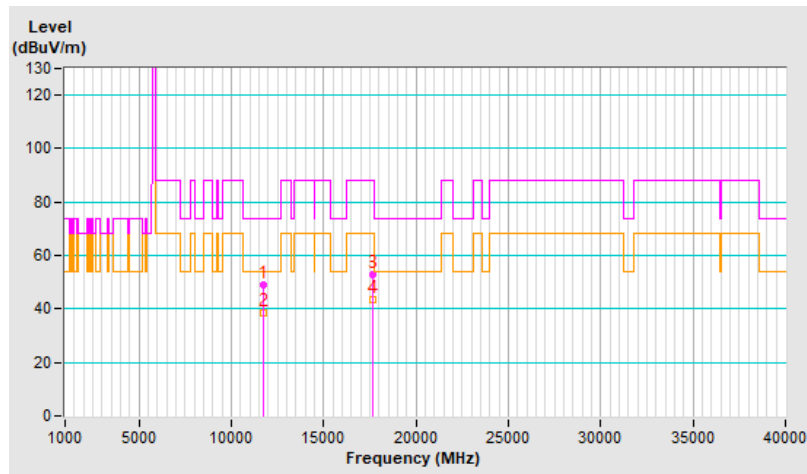


RF Mode	802.11be (EHT40)	Channel	CH 175 : 5875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 510 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11750.00	48.4 PK	74.0	-25.6	1.93 V	168	32.4	16.0
2	11750.00	38.3 AV	54.0	-15.7	1.93 V	168	22.3	16.0
3	#17625.00	55.1 PK	88.2	-33.1	1.63 V	75	32.7	22.4
4	#17625.00	42.8 AV	68.2	-25.4	1.63 V	75	20.4	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

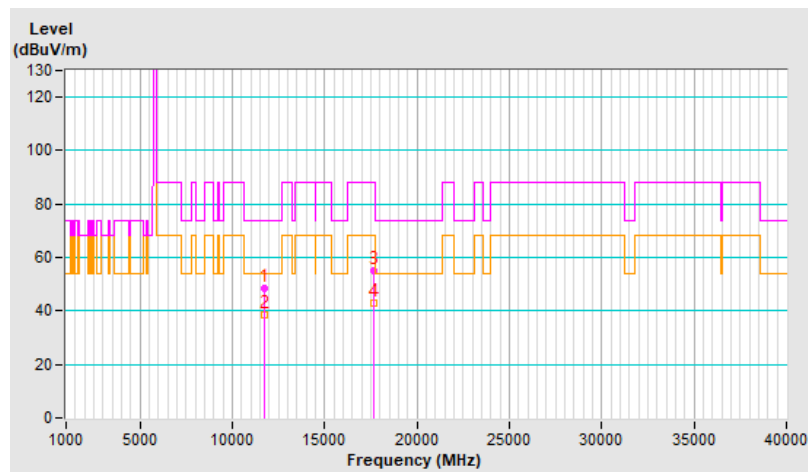


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11710.00	48.9 PK	74.0	-25.1	3.22 H	61	32.6	16.3
2	11710.00	38.9 AV	54.0	-15.1	3.22 H	61	22.6	16.3
3	#17565.00	53.5 PK	88.2	-34.7	1.52 H	168	31.4	22.1
4	#17565.00	43.4 AV	68.2	-24.8	1.52 H	168	21.3	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

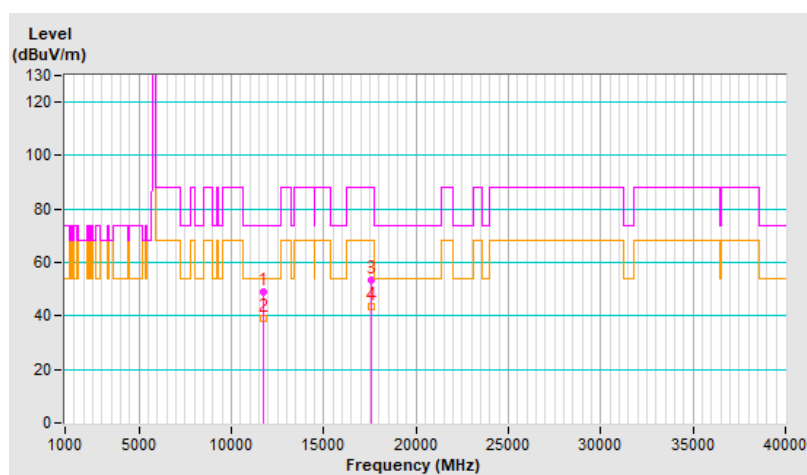


RF Mode	802.11be (EHT80)	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	49.0 PK	74.0	-25.0	2.01 V	152	32.7	16.3
2	11710.00	39.0 AV	54.0	-15.0	2.01 V	152	22.7	16.3
3	#17565.00	55.9 PK	88.2	-32.3	1.53 V	87	33.8	22.1
4	#17565.00	43.6 AV	68.2	-24.6	1.53 V	87	21.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

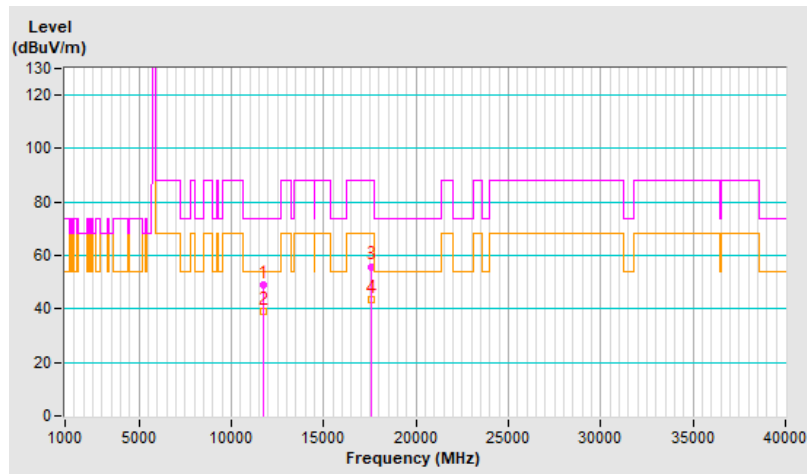


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.4 PK	74.0	-25.6	3.21 H	52	31.9	16.5
2	11630.00	38.0 AV	54.0	-16.0	3.21 H	52	21.5	16.5
3	#17445.00	53.7 PK	88.2	-34.5	1.47 H	194	31.8	21.9
4	#17445.00	43.7 AV	68.2	-24.5	1.47 H	194	21.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

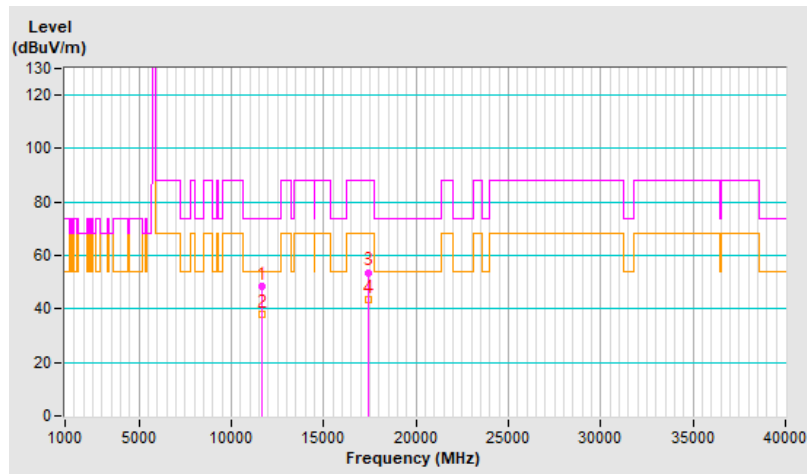


RF Mode	802.11be (EHT160)	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	49.5 PK	74.0	-24.5	1.97 V	174	33.0	16.5
2	11630.00	39.1 AV	54.0	-14.9	1.97 V	174	22.6	16.5
3	#17445.00	54.9 PK	88.2	-33.3	1.64 V	79	33.0	21.9
4	#17445.00	42.7 AV	68.2	-25.5	1.64 V	79	20.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

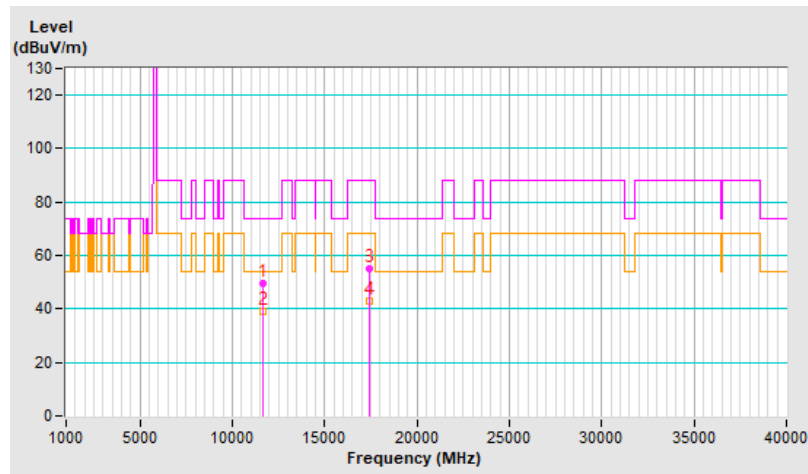


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	47.7 PK	74.0	-26.3	3.26 H	45	31.3	16.4
2	11690.00	37.7 AV	54.0	-16.3	3.26 H	45	21.3	16.4
3	#17535.00	53.1 PK	88.2	-35.1	1.37 H	202	31.0	22.1
4	#17535.00	43.1 AV	68.2	-25.1	1.37 H	202	21.0	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

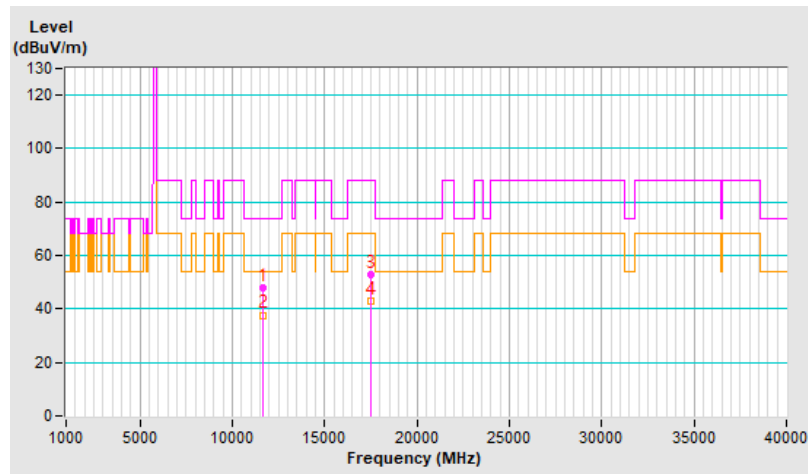


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	1.97 V	201	32.1	16.4
2	11690.00	38.4 AV	54.0	-15.6	1.97 V	201	22.0	16.4
3	#17535.00	53.8 PK	88.2	-34.4	1.49 V	57	31.7	22.1
4	#17535.00	43.0 AV	68.2	-25.2	1.49 V	57	20.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

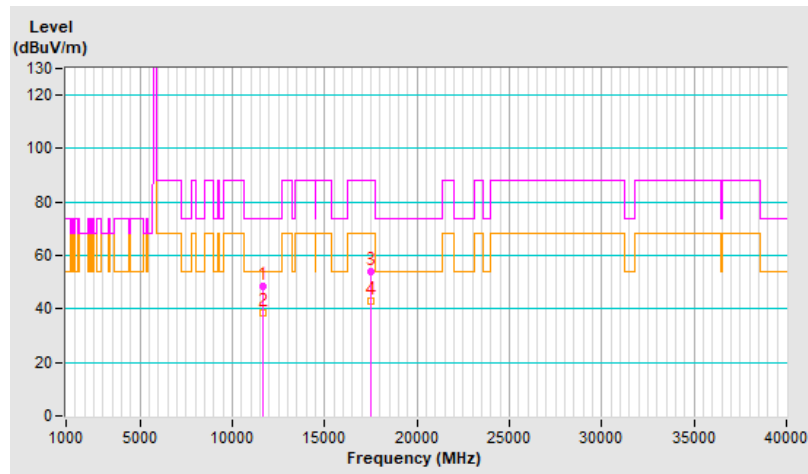


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.20 H	55	32.0	16.1
2	11730.00	38.0 AV	54.0	-16.0	3.20 H	55	21.9	16.1
3	#17595.00	52.5 PK	88.2	-35.7	1.41 H	215	30.4	22.1
4	#17595.00	42.7 AV	68.2	-25.5	1.41 H	215	20.6	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

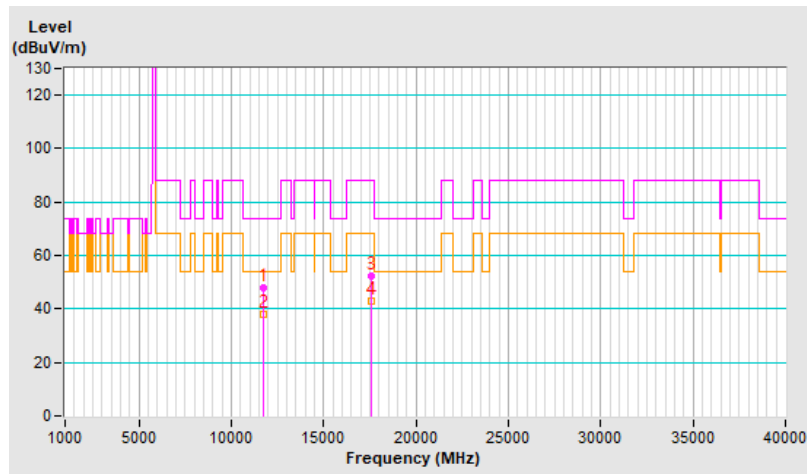


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	1.09 V	12	32.8	16.1
2	11730.00	39.4 AV	54.0	-14.6	1.09 V	12	23.3	16.1
3	#17595.00	53.0 PK	88.2	-35.2	1.52 V	75	30.9	22.1
4	#17595.00	42.4 AV	68.2	-25.8	1.52 V	75	20.3	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

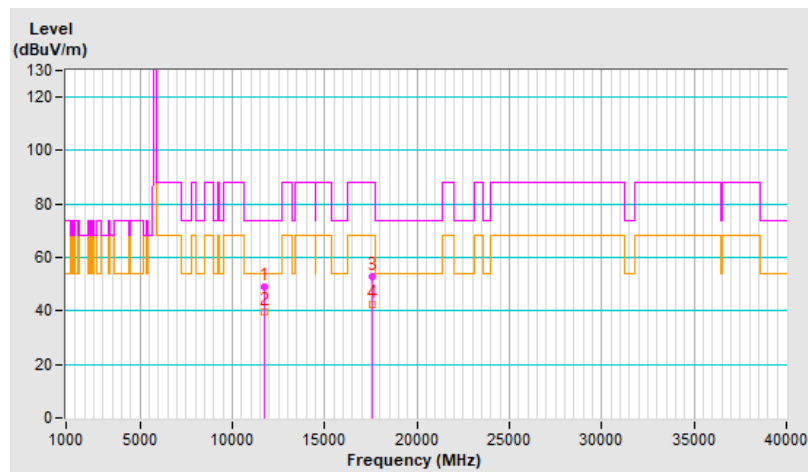


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	3.20 H	54	32.3	16.0
2	11770.00	38.4 AV	54.0	-15.6	3.20 H	54	22.4	16.0
3	#17655.00	52.1 PK	88.2	-36.1	1.35 H	213	29.3	22.8
4	#17655.00	42.2 AV	68.2	-26.0	1.35 H	213	19.4	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

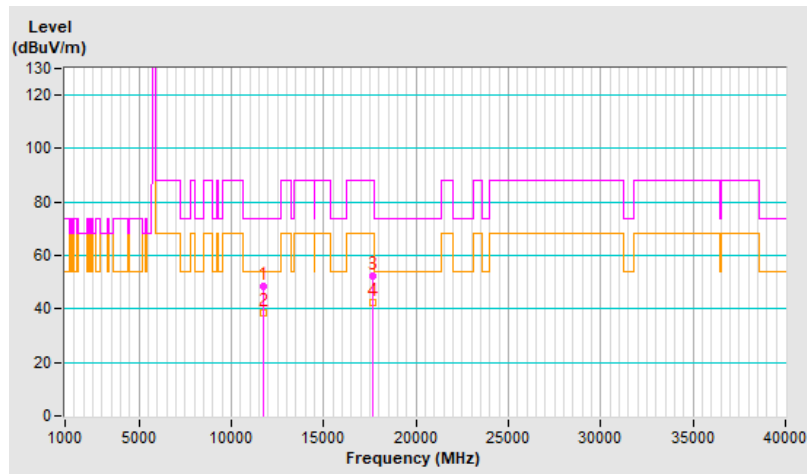


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.0 PK	74.0	-26.0	2.00 V	209	32.0	16.0
2	11770.00	38.5 AV	54.0	-15.5	2.00 V	209	22.5	16.0
3	#17655.00	53.8 PK	88.2	-34.4	1.58 V	64	31.0	22.8
4	#17655.00	43.4 AV	68.2	-24.8	1.58 V	64	20.6	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

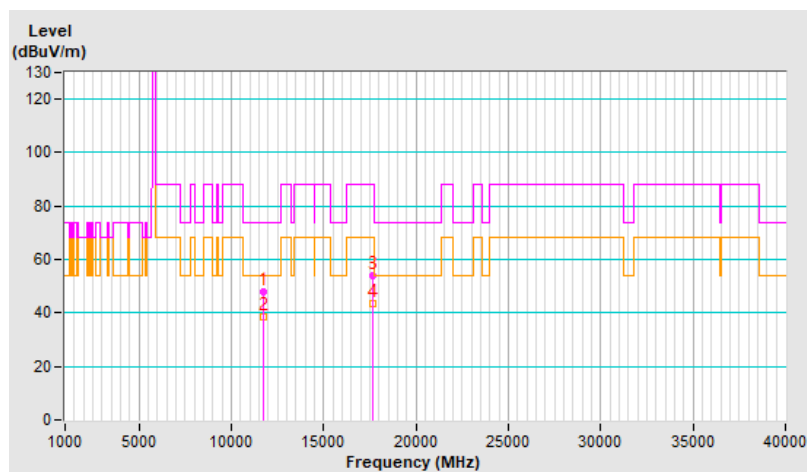


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.6 PK	74.0	-25.4	3.25 H	50	32.2	16.4
2	11690.00	38.6 AV	54.0	-15.4	3.25 H	50	22.2	16.4
3	#17535.00	52.1 PK	88.2	-36.1	1.41 H	206	30.0	22.1
4	#17535.00	42.3 AV	68.2	-25.9	1.41 H	206	20.2	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

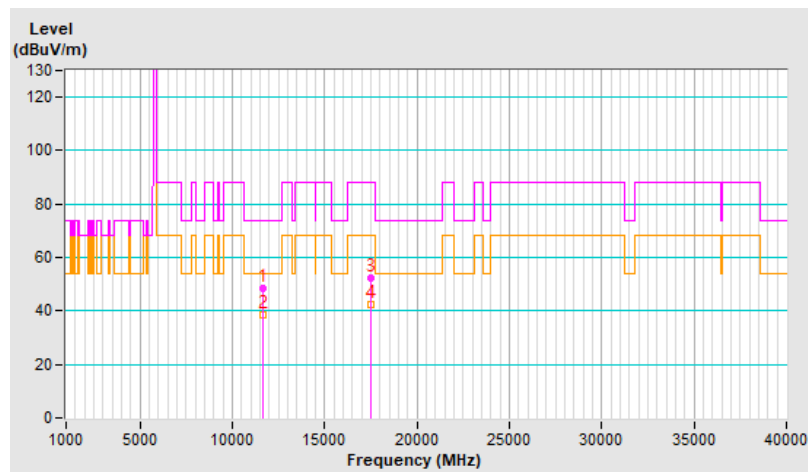


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	2.00 V	189	32.1	16.4
2	11690.00	38.7 AV	54.0	-15.3	2.00 V	189	22.3	16.4
3	#17535.00	53.5 PK	88.2	-34.7	1.55 V	85	31.4	22.1
4	#17535.00	43.1 AV	68.2	-25.1	1.55 V	85	21.0	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

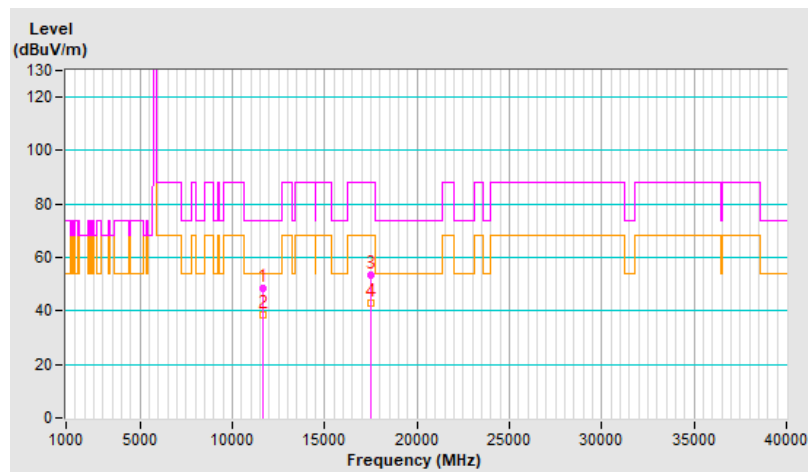


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.1 PK	74.0	-25.9	3.28 H	51	32.0	16.1
2	11730.00	38.2 AV	54.0	-15.8	3.28 H	51	22.1	16.1
3	#17595.00	52.5 PK	88.2	-35.7	1.44 H	212	30.4	22.1
4	#17595.00	42.7 AV	68.2	-25.5	1.44 H	212	20.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

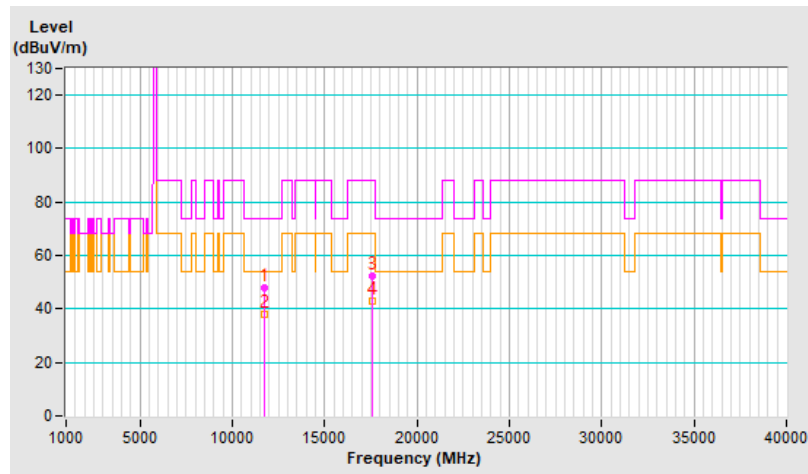


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	1.97 V	184	32.3	16.1
2	11730.00	38.3 AV	54.0	-15.7	1.97 V	184	22.2	16.1
3	#17595.00	54.1 PK	88.2	-34.1	1.50 V	63	32.0	22.1
4	#17595.00	43.6 AV	68.2	-24.6	1.50 V	63	21.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

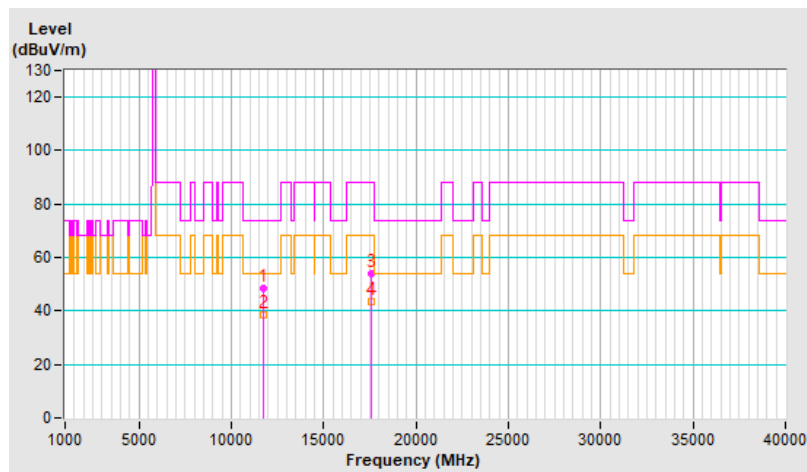


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	3.29 H	53	32.3	16.0
2	11770.00	38.6 AV	54.0	-15.4	3.29 H	53	22.6	16.0
3	#17655.00	52.1 PK	88.2	-36.1	1.35 H	202	29.3	22.8
4	#17655.00	42.3 AV	68.2	-25.9	1.35 H	202	19.5	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

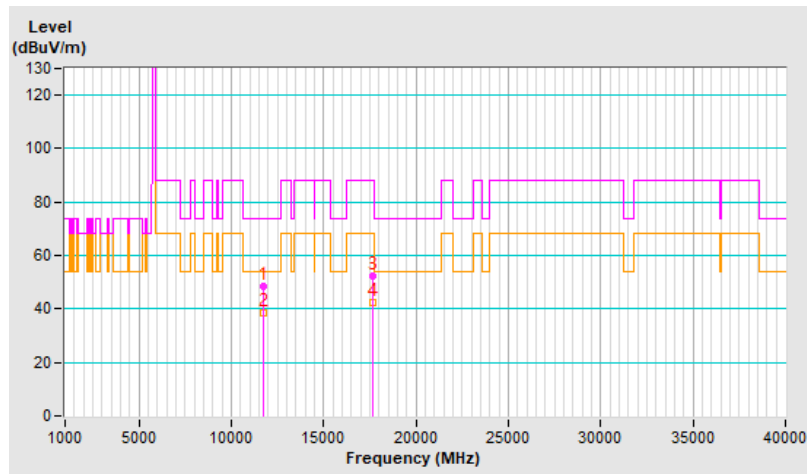


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	2.03 V	207	32.1	16.0
2	11770.00	38.4 AV	54.0	-15.6	2.03 V	207	22.4	16.0
3	#17655.00	53.8 PK	88.2	-34.4	1.57 V	61	31.0	22.8
4	#17655.00	43.1 AV	68.2	-25.1	1.57 V	61	20.3	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

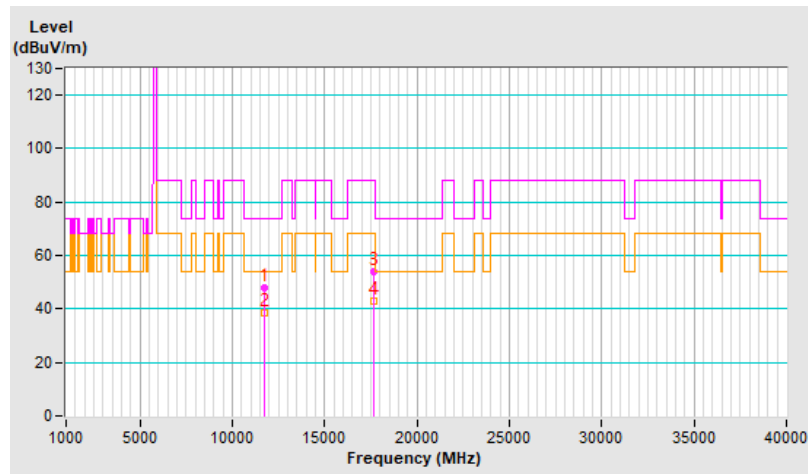


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.30 H	55	32.1	16.4
2	11690.00	38.6 AV	54.0	-15.4	3.30 H	55	22.2	16.4
3	#17535.00	52.3 PK	88.2	-35.9	1.41 H	193	30.2	22.1
4	#17535.00	42.3 AV	68.2	-25.9	1.41 H	193	20.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

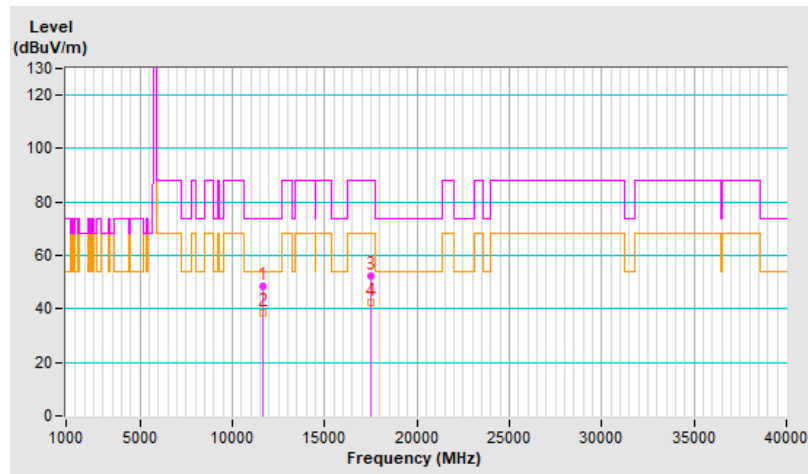


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.7 PK	74.0	-25.3	2.00 V	183	32.3	16.4
2	11690.00	38.9 AV	54.0	-15.1	2.00 V	183	22.5	16.4
3	#17535.00	54.3 PK	88.2	-33.9	1.56 V	86	32.2	22.1
4	#17535.00	43.6 AV	68.2	-24.6	1.56 V	86	21.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

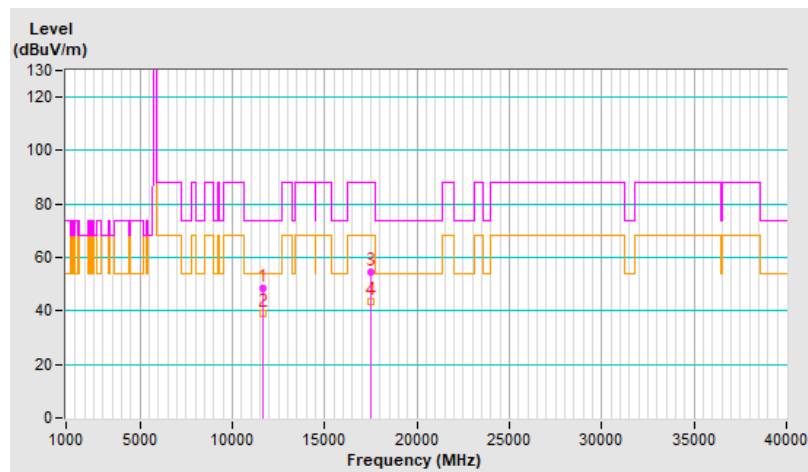


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11730.00	48.7 PK	74.0	-25.3	3.26 H	63	32.6	16.1
2	11730.00	38.5 AV	54.0	-15.5	3.26 H	63	22.4	16.1
3	#17595.00	53.4 PK	88.2	-34.8	1.44 H	223	31.3	22.1
4	#17595.00	43.2 AV	68.2	-25.0	1.44 H	223	21.1	22.1

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

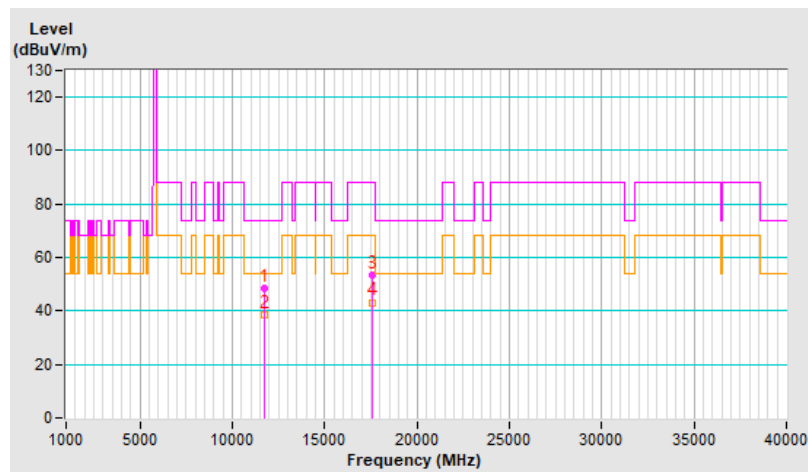


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.9 PK	74.0	-25.1	2.00 V	197	32.8	16.1
2	11730.00	39.1 AV	54.0	-14.9	2.00 V	197	23.0	16.1
3	#17595.00	54.0 PK	88.2	-34.2	1.59 V	56	31.9	22.1
4	#17595.00	43.5 AV	68.2	-24.7	1.59 V	56	21.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

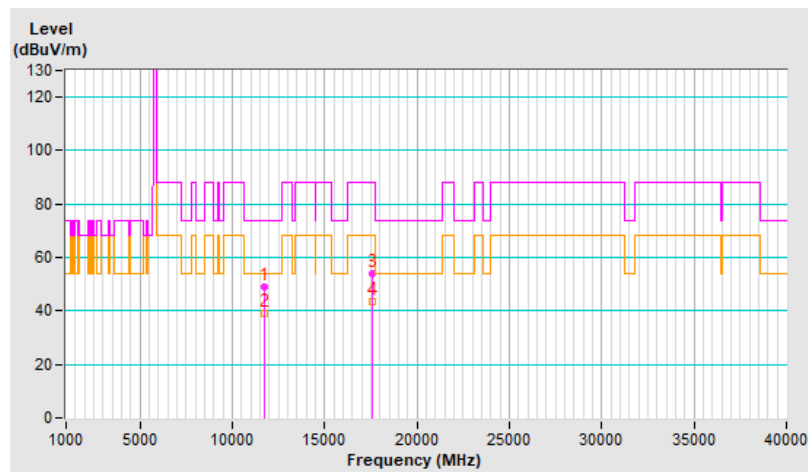


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	3.27 H	47	32.3	16.0
2	11770.00	38.2 AV	54.0	-15.8	3.27 H	47	22.2	16.0
3	#17655.00	52.8 PK	88.2	-35.4	1.45 H	196	30.0	22.8
4	#17655.00	42.7 AV	68.2	-25.5	1.45 H	196	19.9	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

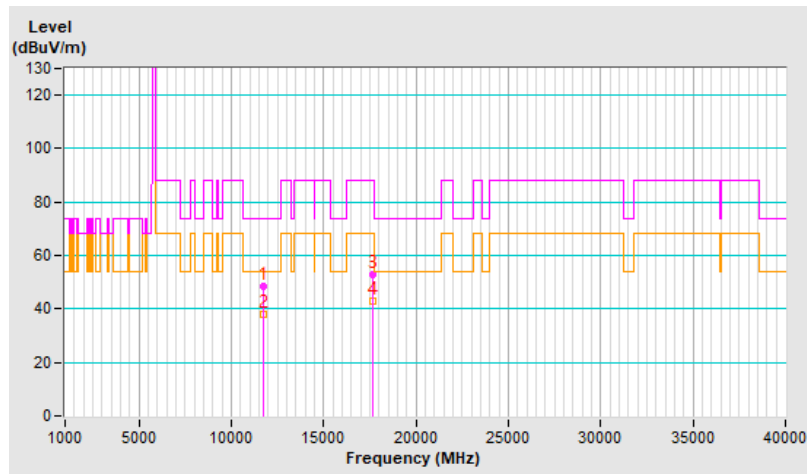


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 2 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	11770.00	48.2 PK	74.0	-25.8	2.06 V	199	32.2	16.0
2	11770.00	38.4 AV	54.0	-15.6	2.06 V	199	22.4	16.0
3	#17655.00	53.8 PK	88.2	-34.4	1.50 V	83	31.0	22.8
4	#17655.00	43.1 AV	68.2	-25.1	1.50 V	83	20.3	22.8

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

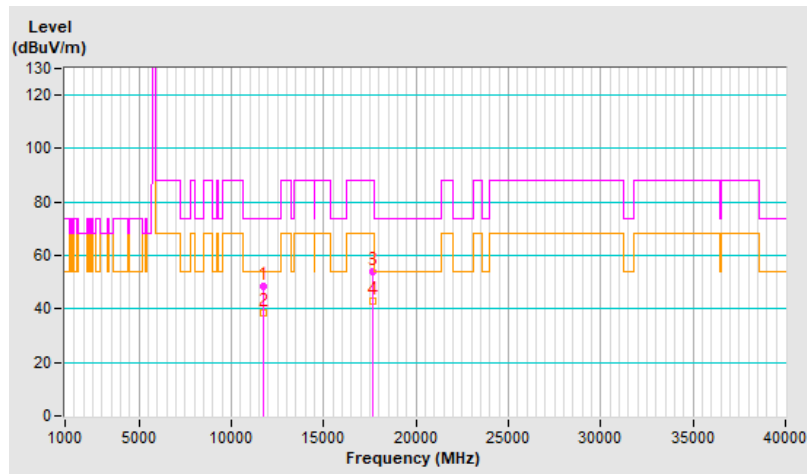


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.5 PK	74.0	-25.5	3.21 H	44	32.1	16.4
2	11690.00	38.6 AV	54.0	-15.4	3.21 H	44	22.2	16.4
3	#17535.00	52.7 PK	88.2	-35.5	1.35 H	213	30.6	22.1
4	#17535.00	42.5 AV	68.2	-25.7	1.35 H	213	20.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

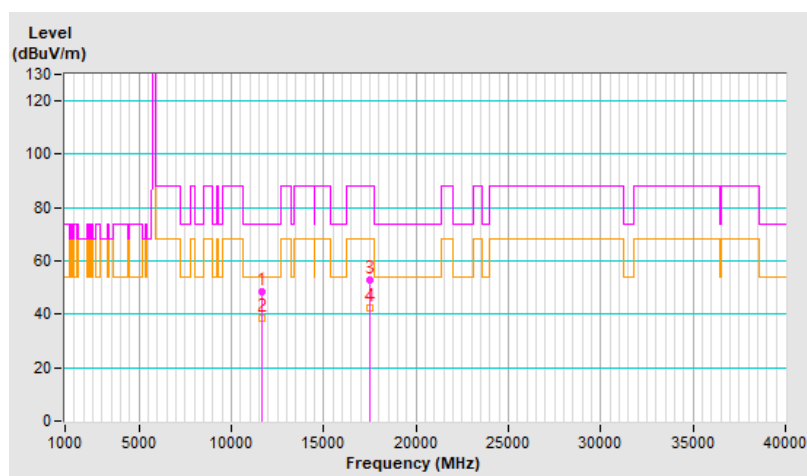


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.9 PK	74.0	-25.1	2.00 V	196	32.5	16.4
2	11690.00	39.0 AV	54.0	-15.0	2.00 V	196	22.6	16.4
3	#17535.00	54.1 PK	88.2	-34.1	1.52 V	85	32.0	22.1
4	#17535.00	43.7 AV	68.2	-24.5	1.52 V	85	21.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

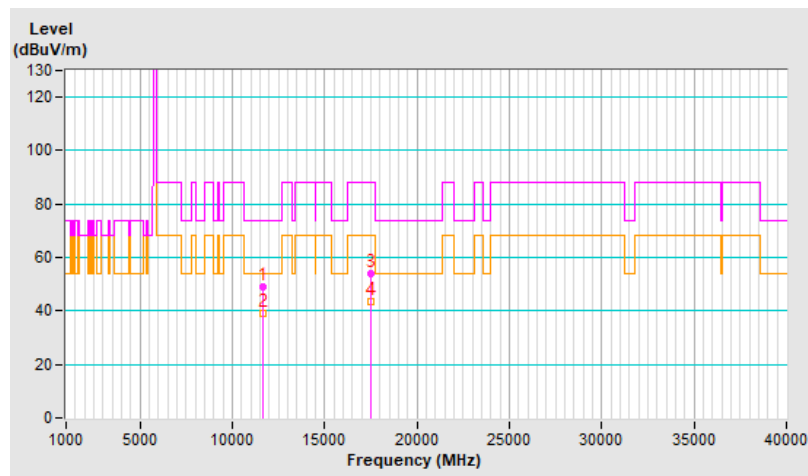


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.2 PK	74.0	-25.8	3.21 H	60	32.1	16.1
2	11730.00	38.3 AV	54.0	-15.7	3.21 H	60	22.2	16.1
3	#17595.00	52.6 PK	88.2	-35.6	1.34 H	196	30.5	22.1
4	#17595.00	42.4 AV	68.2	-25.8	1.34 H	196	20.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

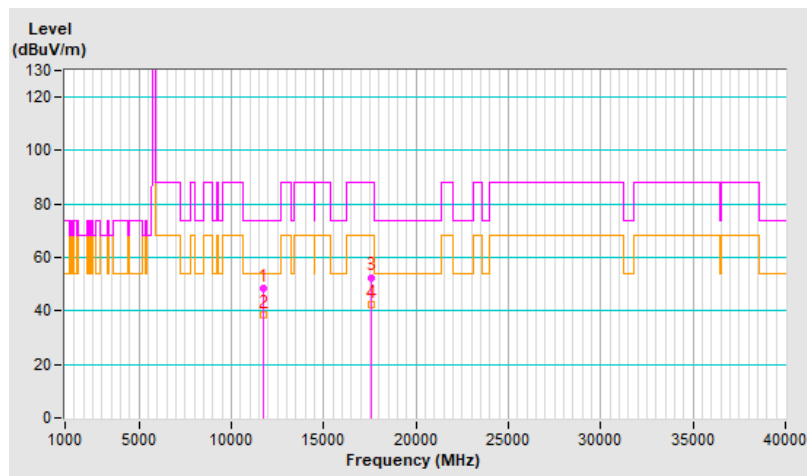


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.0 PK	74.0	-26.0	2.06 V	189	31.9	16.1
2	11730.00	38.1 AV	54.0	-15.9	2.06 V	189	22.0	16.1
3	#17595.00	53.9 PK	88.2	-34.3	1.54 V	72	31.8	22.1
4	#17595.00	43.4 AV	68.2	-24.8	1.54 V	72	21.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

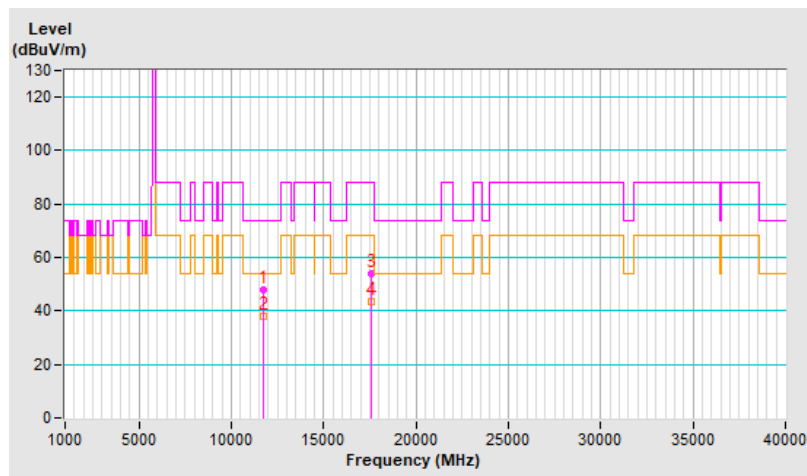


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	47.9 PK	74.0	-26.1	3.20 H	42	31.9	16.0
2	11770.00	37.9 AV	54.0	-16.1	3.20 H	42	21.9	16.0
3	#17655.00	52.6 PK	88.2	-35.6	1.37 H	220	29.8	22.8
4	#17655.00	42.7 AV	68.2	-25.5	1.37 H	220	19.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

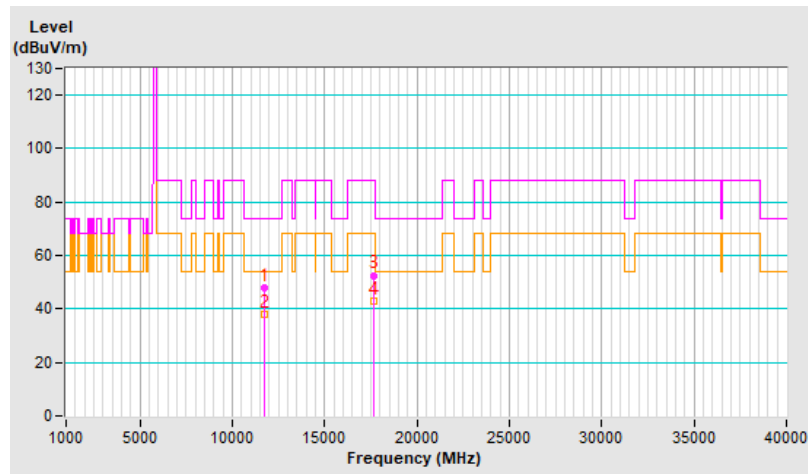


RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.5 PK	74.0	-25.5	1.98 V	189	32.5	16.0
2	11770.00	38.5 AV	54.0	-15.5	1.98 V	189	22.5	16.0
3	#17655.00	54.1 PK	88.2	-34.1	1.49 V	63	31.3	22.8
4	#17655.00	43.3 AV	68.2	-24.9	1.49 V	63	20.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

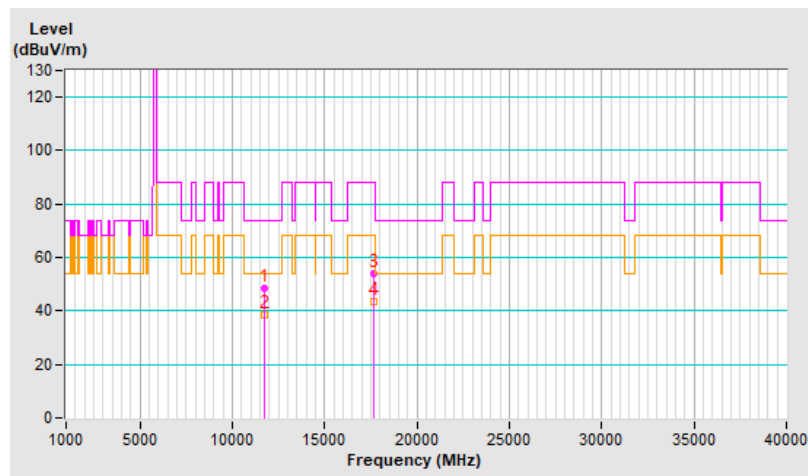


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.7 PK	74.0	-25.3	3.29 H	55	32.3	16.4
2	11690.00	38.6 AV	54.0	-15.4	3.29 H	55	22.2	16.4
3	#17535.00	52.3 PK	88.2	-35.9	1.45 H	215	30.2	22.1
4	#17535.00	42.6 AV	68.2	-25.6	1.45 H	215	20.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

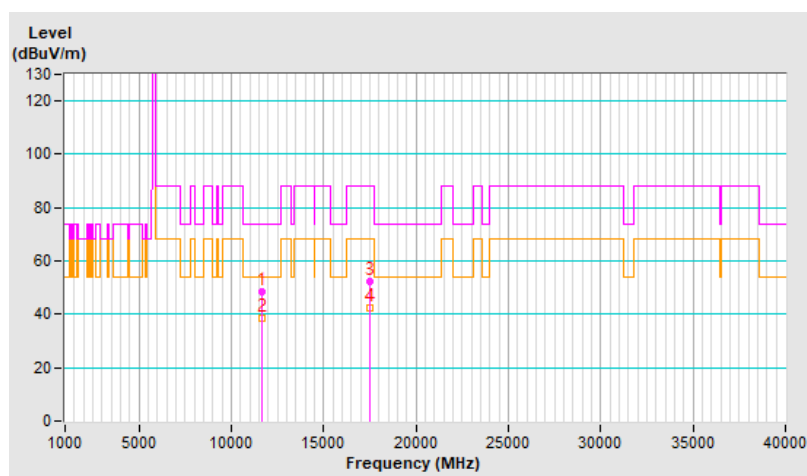


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 169 : 5845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11690.00	48.2 PK	74.0	-25.8	2.06 V	209	31.8	16.4
2	11690.00	38.7 AV	54.0	-15.3	2.06 V	209	22.3	16.4
3	#17535.00	53.8 PK	88.2	-34.4	1.57 V	59	31.7	22.1
4	#17535.00	43.4 AV	68.2	-24.8	1.57 V	59	21.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

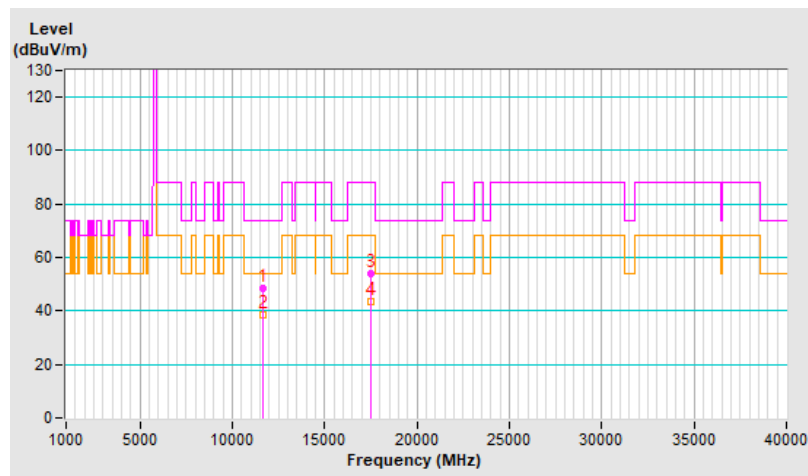


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.4 PK	74.0	-25.6	3.19 H	56	32.3	16.1
2	11730.00	38.4 AV	54.0	-15.6	3.19 H	56	22.3	16.1
3	#17595.00	53.2 PK	88.2	-35.0	1.39 H	196	31.1	22.1
4	#17595.00	43.1 AV	68.2	-25.1	1.39 H	196	21.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

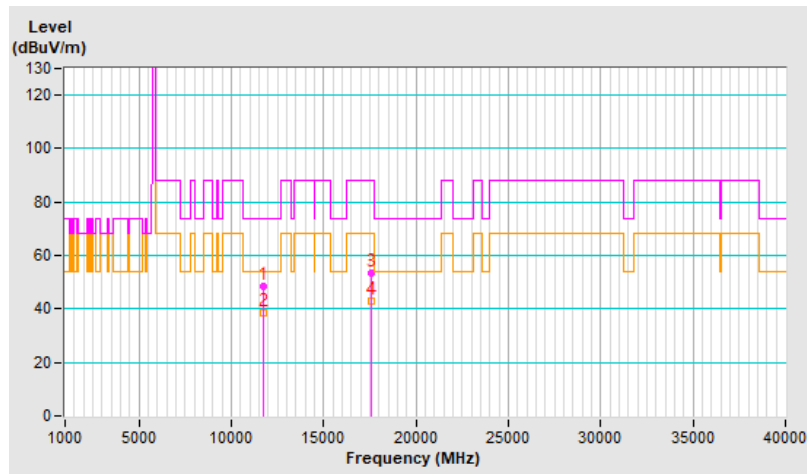


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 173 : 5865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11730.00	48.8 PK	74.0	-25.2	1.97 V	189	32.7	16.1
2	11730.00	38.8 AV	54.0	-15.2	1.97 V	189	22.7	16.1
3	#17595.00	54.5 PK	88.2	-33.7	1.51 V	69	32.4	22.1
4	#17595.00	43.7 AV	68.2	-24.5	1.51 V	69	21.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

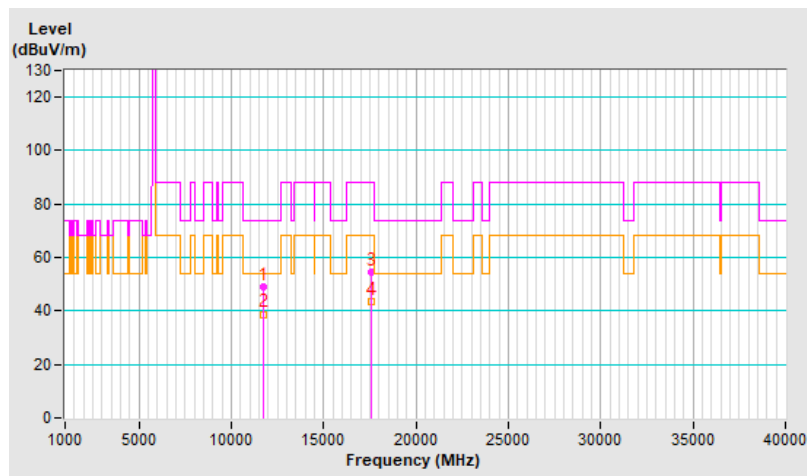


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.1 PK	74.0	-25.9	3.30 H	34	32.1	16.0
2	11770.00	38.2 AV	54.0	-15.8	3.30 H	34	22.2	16.0
3	#17655.00	52.6 PK	88.2	-35.6	1.38 H	203	29.8	22.8
4	#17655.00	42.6 AV	68.2	-25.6	1.38 H	203	19.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

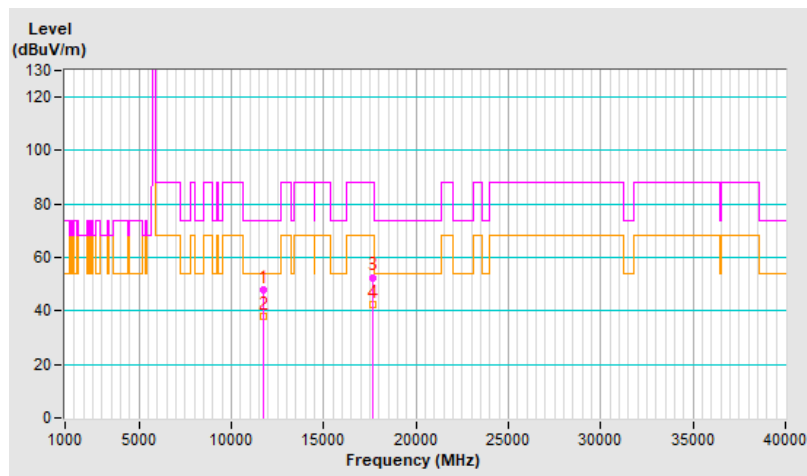


RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 177 : 5885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11770.00	48.3 PK	74.0	-25.7	1.97 V	208	32.3	16.0
2	11770.00	38.5 AV	54.0	-15.5	1.97 V	208	22.5	16.0
3	#17655.00	53.9 PK	88.2	-34.3	1.53 V	83	31.1	22.8
4	#17655.00	43.2 AV	68.2	-25.0	1.53 V	83	20.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

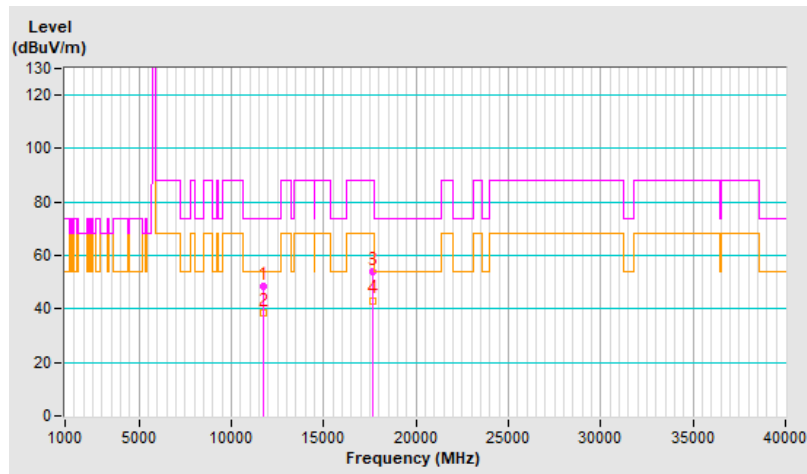


RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.7 PK	74.0	-25.3	3.29 H	46	32.4	16.3
2	11710.00	38.6 AV	54.0	-15.4	3.29 H	46	22.3	16.3
3	#17565.00	51.9 PK	88.2	-36.3	1.43 H	198	29.8	22.1
4	#17565.00	42.3 AV	68.2	-25.9	1.43 H	198	20.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

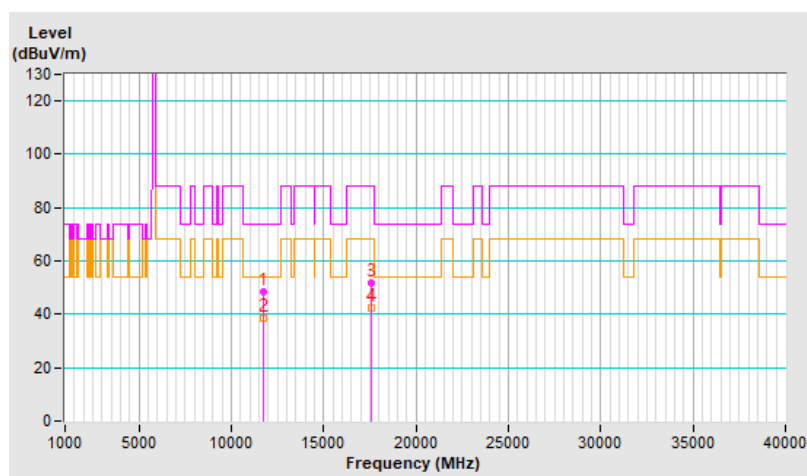


RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 171 : 5855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11710.00	48.3 PK	74.0	-25.7	2.05 V	204	32.0	16.3
2	11710.00	38.4 AV	54.0	-15.6	2.05 V	204	22.1	16.3
3	#17565.00	54.4 PK	88.2	-33.8	1.58 V	61	32.3	22.1
4	#17565.00	43.5 AV	68.2	-24.7	1.58 V	61	21.4	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

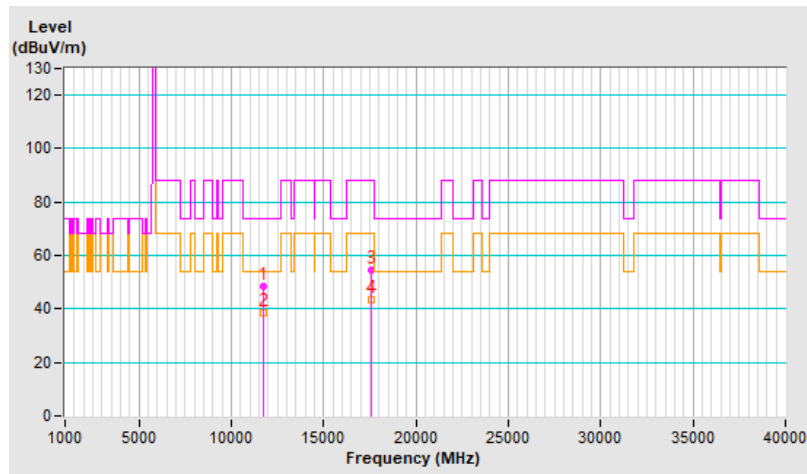


RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.3 PK	74.0	-25.7	3.20 H	50	31.8	16.5
2	11630.00	38.5 AV	54.0	-15.5	3.20 H	50	22.0	16.5
3	#17445.00	53.2 PK	88.2	-35.0	1.40 H	210	31.3	21.9
4	#17445.00	43.1 AV	68.2	-25.1	1.40 H	210	21.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

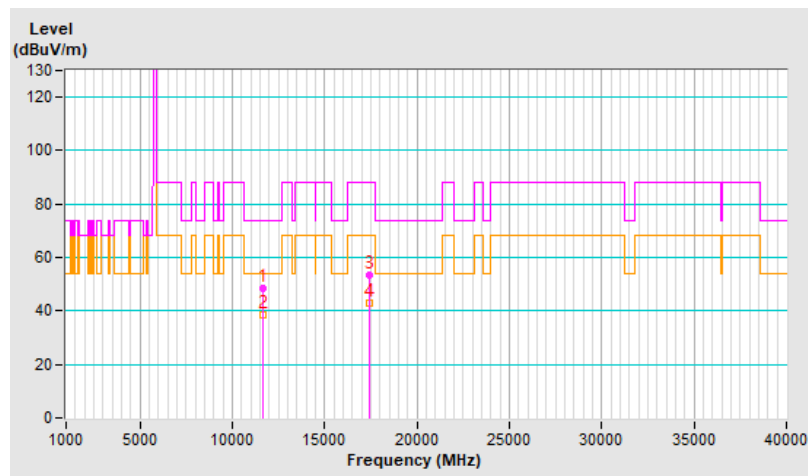


RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.7 PK	74.0	-25.3	2.06 V	198	32.2	16.5
2	11630.00	39.0 AV	54.0	-15.0	2.06 V	198	22.5	16.5
3	#17445.00	54.0 PK	88.2	-34.2	1.51 V	67	32.1	21.9
4	#17445.00	43.6 AV	68.2	-24.6	1.51 V	67	21.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

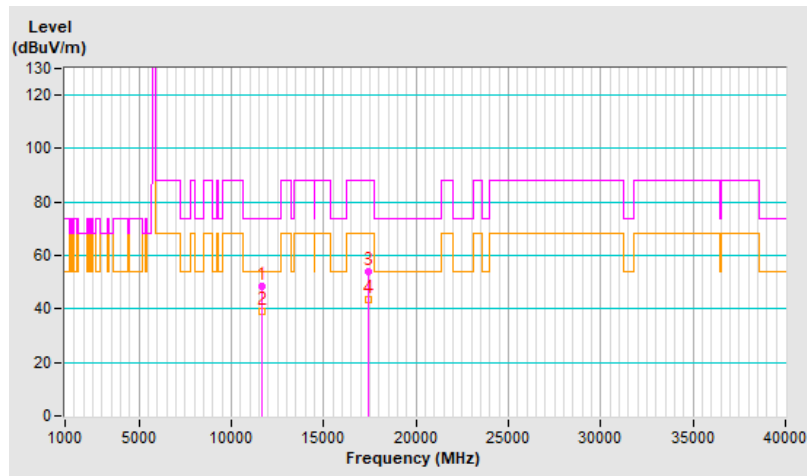


RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.0 PK	74.0	-26.0	3.24 H	58	31.5	16.5
2	11630.00	37.9 AV	54.0	-16.1	3.24 H	58	21.4	16.5
3	#17445.00	52.0 PK	88.2	-36.2	1.43 H	206	30.1	21.9
4	#17445.00	42.2 AV	68.2	-26.0	1.43 H	206	20.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

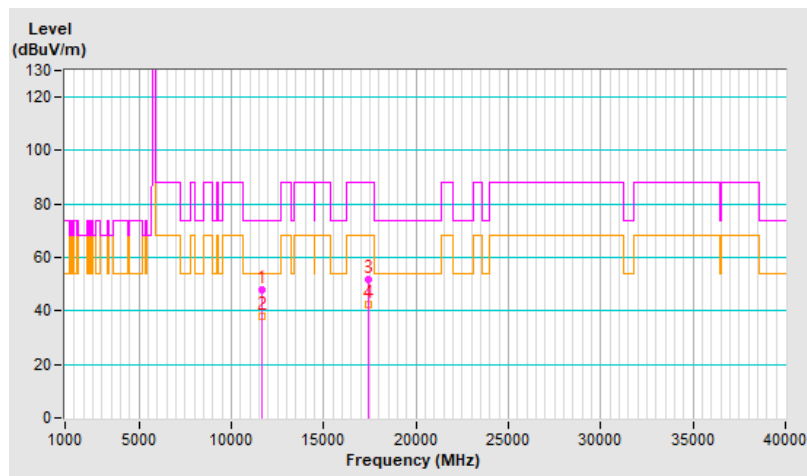


RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 163 : 5815 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	Peak (PK), RB = 1 MHz, VB = 3 MHz Peak (AV), RB = 1 MHz, VB = 5.1 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27°C, 68% RH
Tested By	Tom Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11630.00	48.3 PK	74.0	-25.7	2.01 V	203	31.8	16.5
2	11630.00	38.6 AV	54.0	-15.4	2.01 V	203	22.1	16.5
3	#17445.00	53.4 PK	88.2	-34.8	1.60 V	61	31.5	21.9
4	#17445.00	43.0 AV	68.2	-25.2	1.60 V	61	21.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # " : The radiated frequency is out of the restricted band.

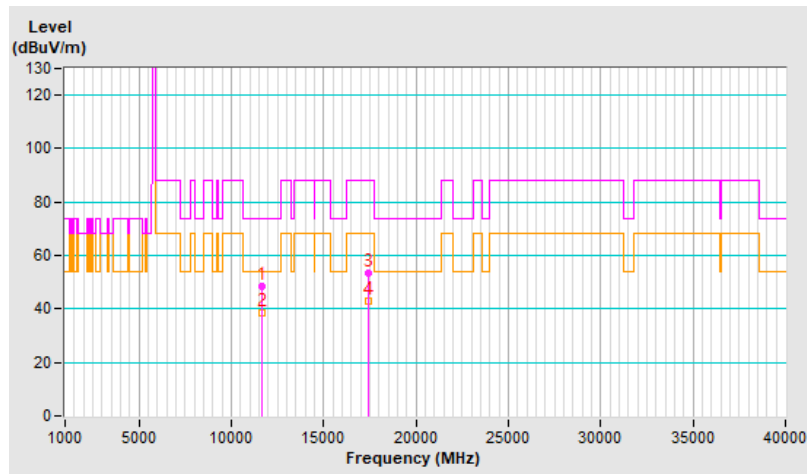

8 Operational Restrictions for 5.85-5.895GHz U-NII Devices

In the 5.850-5.895 GHz band, client devices must operate under the control of an indoor access point. In all cases, an exception exists for transmitting brief messages to an access point when attempting to join its network after detecting a signal that confirms that an access point is operating on a particular channel. Access points may connect to other access points. Client devices are prohibited from connecting directly to another client device.

Device is a Client device, all restrictions are meet the §15.407 requirements. Please refer to the Attestation letter exhibit supplied within this application.

9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---