

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch6

Communication System: IEEE 802.11b; Frequency: 2437.000 MHz; Duty Cycle: 1:1.061
Medium: HSL_2450_231106 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.79$ S/m; $\epsilon_r=39.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.95, 6.73, 7.1); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

Power Drift = 0.00 dB

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg

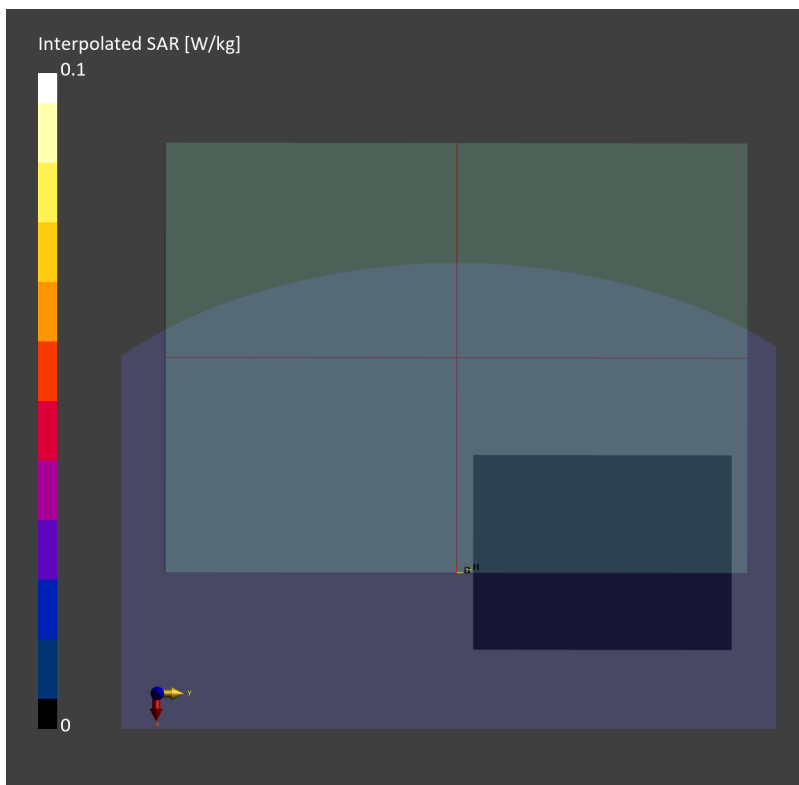

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch54

Communication System: IEEE 802.11n; Frequency: 5270.000 MHz; Duty Cycle: 1:1.139
Medium: HSL_5G_231106 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(5.06, 4.79, 5.02); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

Power Drift = 0.00 dB

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg

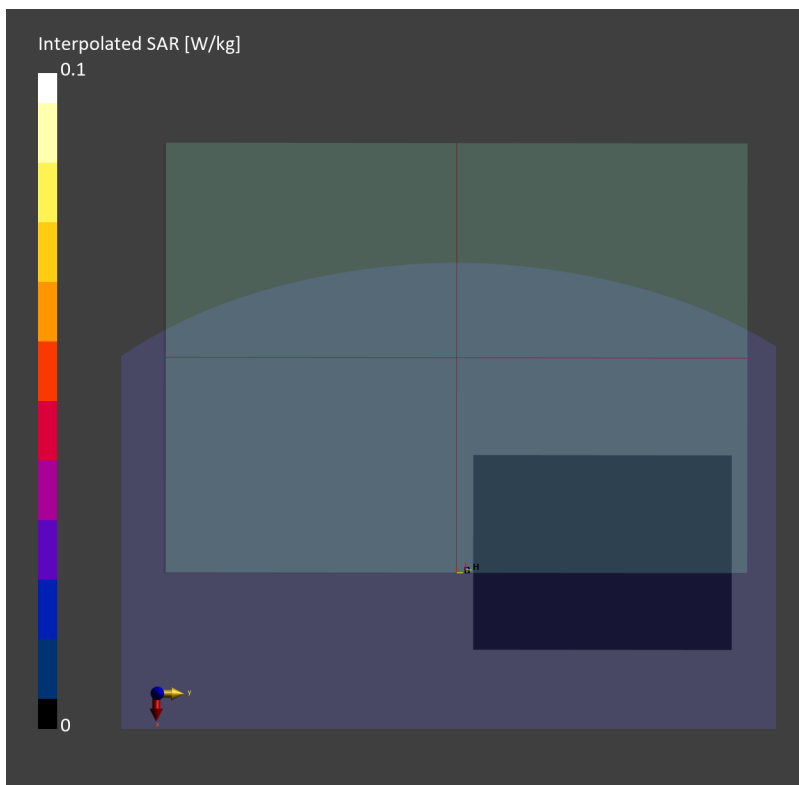

#03_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch110

Communication System: IEEE 802.11n; Frequency: 5550.000 MHz; Duty Cycle: 1:1.139
Medium: HSL_5G_231106 Medium parameters used: $f = 5550.000$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 35.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.45, 4.24, 4.43); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

Power Drift = 0.00 dB

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg

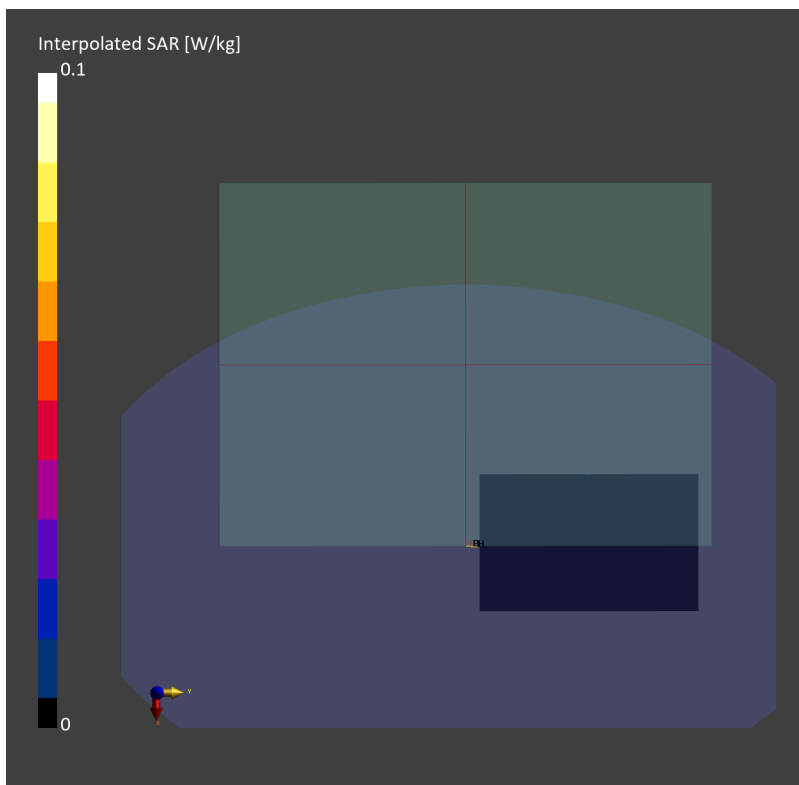

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch159

Communication System: IEEE 802.11n; Frequency: 5795.000 MHz; Duty Cycle: 1:1.139
Medium: HSL_5G_231106 Medium parameters used: $f = 5795.000$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 35.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.55, 4.34, 4.46); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

Power Drift = 0.00 dB

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg

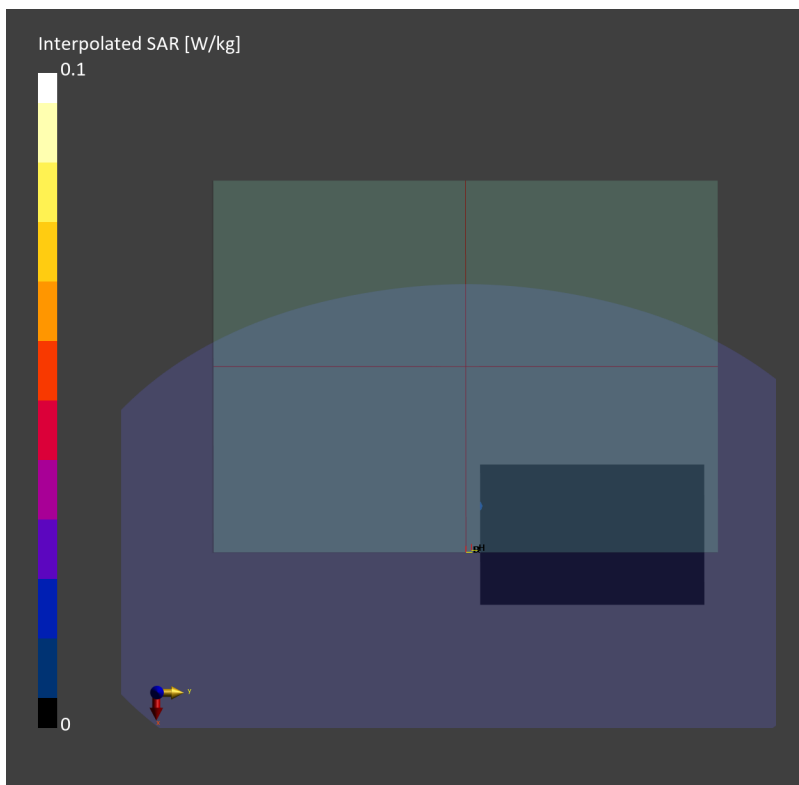

#05_WLAN6GHz_802.11ax-HE40 MCS0_Bottom of Laptop_0mm_Ch123

Communication System: IEEE 802.11ax ; Frequency: 6565.000 MHz; Duty Cycle: 1:1.170
Medium: HSL_6G_231108 Medium parameters used: $f = 6565.000$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 35.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.8, 4.6, 4.93); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10707-AAC

Area Scan (102.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

