

Product Specification

WN8522B 4

IEEE Dual Band 802.11n USB2.0 module

v.02 draft

Table of Contents

Chapter 1	Introduction	4
1.	Introduction	4
1.1	Product Features	4
1.2	Applications	4
Chapter 2	Hardware	5
2.1	General Overview	5
2.2	Hardware Architecture	5
2.3	Main Chipset Information	5
2.4	PCB dimension.....	5
Chapter 3	Software	6
3.1	Operating System Supported.....	6
3.2	Wireless Mode Supported	6
3.3	Security.....	6
Chapter 4	Appearance.....	7
	7
Chapter 5	Specifications	8
References	10

Revision History

<i>Edition #</i>		<i>Reason for revision</i>	<i>Issue date</i>	<i>Written by</i>
V 01	◆	Initial Document	Dec 22th 2009	Troy Chen
V02	◆	Revise PCB outline	March 1, 2010	Troy Chen

Chapter 1 Introduction

1. Introduction

WN8522B 4 is a dual band wireless 802.11n USB Adapter which enables wireless networking systems to attain data communication speeds up to 300 megabits-per-second (Mbps), while remaining backward compatible to the existing installed base of Wi-Fi systems worldwide. It supports operation to the IEEE 802.11a/b and IEEE 802.11g ,and draft IEEE 802.11n standards.

WN8522B 4 will enable a next generation of high-data-rate platforms for operation in the 2.4 GHz band that deliver a five-fold speed increase. The cost and performance advantages will make it an ideal solution for high bandwidth enterprise applications, such as wireless video conferencing and large file transfers. It is compatible with 802.11g standard's mandatory modulation schemes—Complementary Code Keying (CCK), which is used in 802.11b, and Orthogonal Frequency Division Multiplexing (OFDM), used in 802.11g and draft 802.11n. Using CCK ensures backward-compatibility with the installed Wi-Fi 802.11b base, while OFDM provides the speed required for today's high-bandwidth applications.

1.1 Product Features

- ◆ High speed for wireless LAN connection, RX up at 300 Mbps data rate.
- ◆ Backward compatible to the existing IEEE 802.11a/b/g WLAN infrastructure.
- ◆ User-friendly utility to configure SSID, security setup and site survey.
- ◆ Wireless data encryption with 64, 128 encryption for security.
- ◆ Internal antenna
- ◆ Support USB v2.0

1.2 Applications

- ◆ Home networking for device sharing.
- ◆ Wireless multimedia.

Chapter 2 Hardware

2.1 General Overview

- ◆ USB 2.0 Interface and 802.11 n chipset-on-board design.
- ◆ Antenna: 2 Internal Antenna on board

2.2 Hardware Architecture

Broadcom 4323 single chip USB2.0

2.3 Main Chipset Information

BCM4323: MIMO MAC + Baseband processor and RF with fully forward compatible with IEEE 802.11n draft2.0 standard.

2.4 PCB dimension

PCB dimension : 2.0 cm x 5.8.5 cm

Chapter 3 Software

3.1 Operating System Supported

- ◆ Windows 2000 , Windows XP, Windows Vista


3.2 Wireless Mode Supported

- ◆ AP (Infrastructure) Client mode
- ◆ Ad-hoc mode

3.3 Security

- ◆ AP (Infrastructure) mode supports
 - ◆ Static WEP that support both 64 and 128 bit keys.
 - ◆ WPA(TKIP) with PSK
- ◆ Ad-hoc mode supports
 - ◆ None (plaintext)
 - ◆ Static WEP that supports both 64 and 128 bit keys.

Chapter 4 Appearance

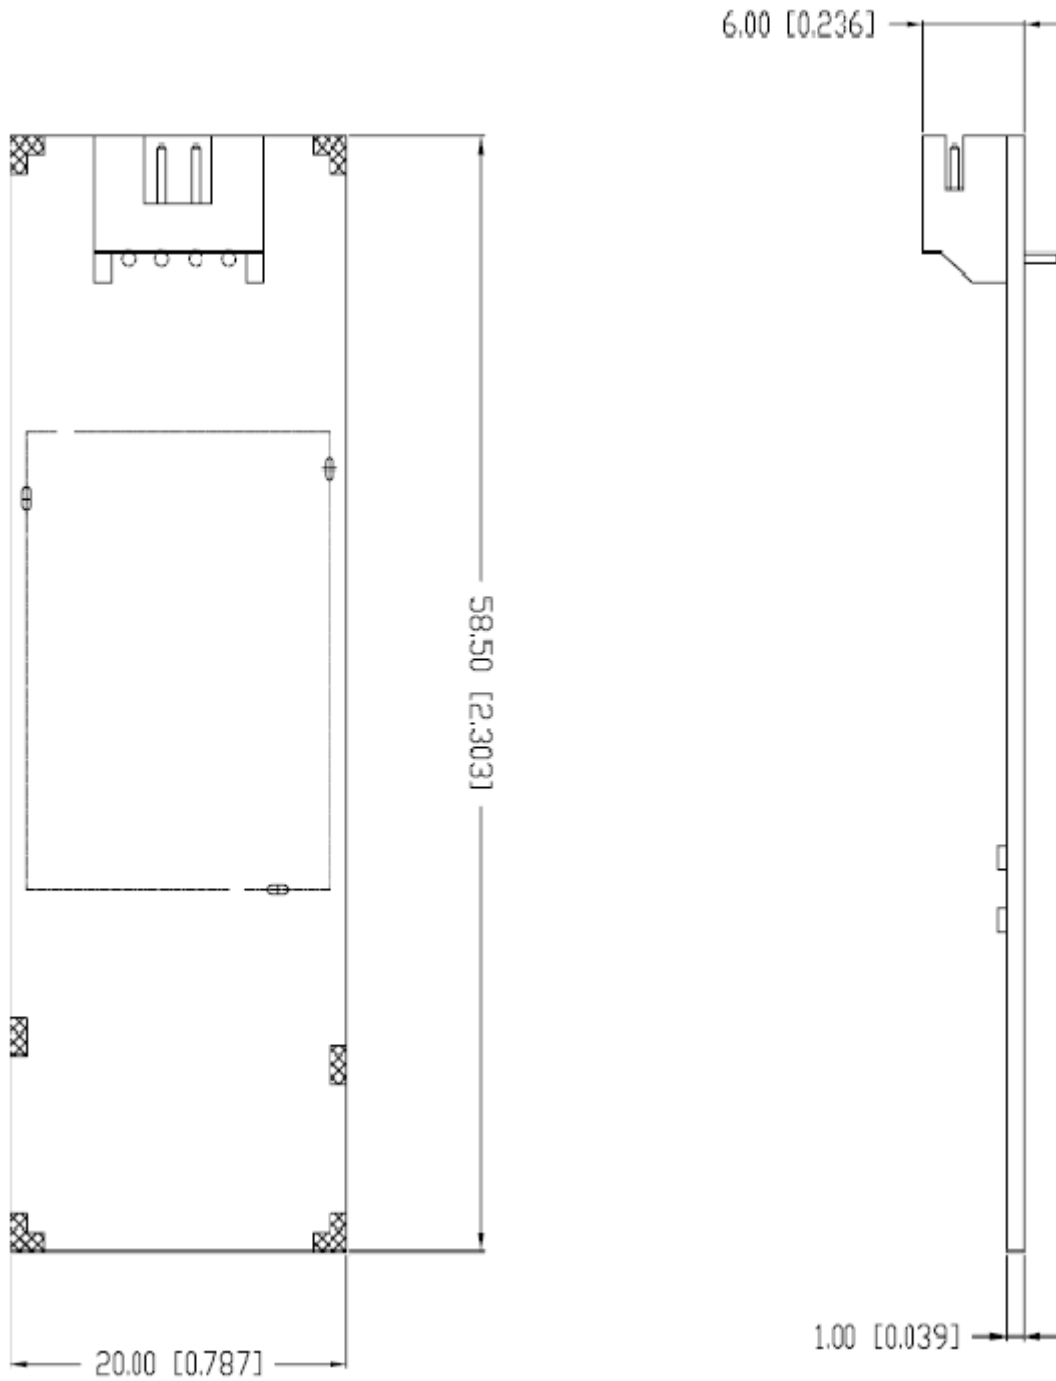

Chapter 5 Specifications

◆ Frequency Band:

Draft 802.11n Radio: 2.4 GHz

802.11g Radio: 2.4 GHz

802.11b Radio: 2.4 GHz

USA – FCC

2412~2462MHz (Ch1~Ch11)

Canada – IC

2412~2462MHz (Ch1~Ch11)

Europe – ETSI

2412~2472MHz (Ch1~Ch13)

Japan – STD-T66/STD-33

2412~2484MHz (Ch1~Ch14)

802.11a Radio : 5 GHz

5.150~5.250GHz

5.250~5.350 GHz

5.470~5.725 GHz

5.725~5.850GHz

◆ Operating Channels:

IEEE 802.11b/g/n compliant:

11 channels (US, Canada)

13 channels (ETSI)

14 channels (Japan)

◆ Transmit Power and Sensitivity:

TX Output Power:(Typical)

11b 18.5 +/- 2.5 dBm

11g 15 +/- 2.5 dBm@54Mbps

11n 14.5 +/- 2.5 dBm

Rx Sensitivity:(Typical)

-84 dBm @ 11 Mbps

-70 dBm @54 Mbps

-64 dBm @64-QAM, 20MHz channel spacing

-61 dBm @64-QAM, 40MHz channel spacing

◆ Modulation

DBPSK @1Mbps

DQPSK@2Mbp

CCK@5.5/11Mbps

BPSK@6/9 Mbps

QPSK@12/18Mbps

16-QAM@24Mbps

64-QAM@48/54Mbps and above, RX up to 300Mbps

- ◆ Current consumption(5V DC):
 - TX: <500mA , @MCS7, 40MHz
 - RX: 450mA Max, @MCS15, 40MHz
 - Power Saving: <ToBeUpdate> mA
 - Radio OFF mode: 50 mA

- ◆ Operating Temperature: 0 ~ 40 °C ambient
- ◆ Storage Temperature: -10 ~ 70 °C ambient
- ◆ Humidity: 5 ~ 90% and must be non-condensing

- ◆ Regulation and certification compliance available:
 - ◆ WHQL
 - ◆ ETSI/CE
 - ◆ ESD: EN61000-4-2, which specifies 4kV contact and 8kV air discharge.

References

- ◆ BRCM Reference Design Functional Specification
- ◆ IEEE 802.11b Standard Specification
- ◆ IEEE 802.11g Standard Specification
- ◆ IEEE 802.11n draft Standard Specification

The drawings, specifications and the data contain herein are the exclusive property of Arcadyan Technology Corp. issued in strict confidence and shall not, without the prior written permission of Arcadyan Technology Corp., be reproduced, copied or used, in parts or as a whole, for any purpose whatsoever, except the manufacture of articles for Arcadyan Technology Corp.

Arcadyan makes no warranties with respect to the correctness, accuracy or wholeness of this specification. The information in this document is subject to change without notice. Arcadyan reserves the right to make revisions to this document and the product described herein without obligation to notify any person or entity of any such changes.

WARNING

This document is intended for internal use only. A Non-Disclosure Agreement (NDA) is required to release this document under any circumstances

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

This device is going to be operated in 5.15~5.25GHz frequency range, it is restricted in indoor environment only.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20cm** between the radiator & your body.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

This device is going to be operated in 5.15~5.25GHz frequency range, it is restricted in indoor environment only.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20cm** between the radiator & your body.