

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 24  
47 CFR FCC Part 27  
47 CFR FCC Part 2

**Report No.:** RFBCMA-WTW-P23030799B-4

**FCC ID:** RAXTMOG4AR

**Product:** 5G Gateway

**Brand:** T-Mobile

**Model No.:** TMO-G4AR

**Received Date:** 2023/5/12

**Test Date:** 2023/5/23 ~ 2023/5/24

**Issued Date:** 2023/6/15

**Applicant:** Arcadyan Technology Corporation

**Address:** No.8, Sec.2, Guangfu Rd., Hsinchu City 30071, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:**

**Approved by:** Jeremy Lin, **Date:** 2023/6/15  
Jeremy Lin / Project Engineer

This test report consists of 106 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Polly Chien / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate.....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Antenna Description of EUT .....	8
3.3 Test Mode Applicability and Tested Channel Detail.....	10
3.4 Test Program Used and Operation Descriptions .....	14
3.5 Connection Diagram of EUT and Peripheral Devices .....	14
3.6 Configuration of Peripheral Devices and Cable Connections .....	14
<b>4 Test Instruments .....</b>	<b>15</b>
4.1 Radiated Spurious Emissions below 1GHz.....	15
4.2 Radiated Spurious Emissions above 1GHz .....	16
<b>5 Limits of Test Items.....</b>	<b>17</b>
5.1 Radiated Spurious Emissions below 1GHz.....	17
5.2 Radiated Spurious Emissions above 1GHz .....	17
<b>6 Test Arrangements.....</b>	<b>18</b>
6.1 Radiated Spurious Emissions below 1GHz.....	18
6.1.1 Test Setup .....	18
6.1.2 Test Procedure.....	18
6.2 Radiated Spurious Emissions above 1GHz .....	19
6.2.1 Test Setup .....	19
6.2.2 Test Procedure.....	19
<b>7 Test Results of Test Item .....</b>	<b>20</b>
7.1 Radiated Spurious Emissions below 1GHz.....	20
7.1.1 NR n25 SCS 15 kHz+LTE Band 12 .....	20
7.1.2 NR n41 SCS 30 kHz+LTE Band 66 .....	24
7.1.3 NR n66 SCS 15 kHz+LTE Band 12 .....	28
7.1.4 NR n71 SCS 15 kHz+LTE Band 2 .....	32
7.2 Radiated Spurious Emissions above 1GHz .....	36
7.2.1 NR n25 SCS 15 kHz+LTE Band 12 .....	36
7.2.2 NR n41 SCS 30 kHz+LTE Band 66 .....	54
7.2.3 NR n66 SCS 15 kHz+LTE Band 12 .....	72
7.2.4 R n71 SCS 15 kHz+LTE Band 2.....	90
<b>8 Pictures of Test Arrangements .....</b>	<b>105</b>
<b>9 Information of the Testing Laboratories .....</b>	<b>106</b>

## Release Control Record

Issue No.	Description	Date Issued
RFBCMA-WTW-P23030799B-4	Original release.	2023/6/15

## 1 Certificate

**Product:** 5G Gateway

**Brand:** T-Mobile

**Test Model:** TMO-G4AR

**Sample Status:** Engineering sample

**Applicant:** Arcadyan Technology Corporation

**Test Date:** 2023/5/23 ~ 2023/5/24

**Standard:** 47 CFR FCC Part 24  
47 CFR FCC Part 27  
47 CFR FCC Part 2

**Measurement procedure:** ANSI/TIA/EIA-603-E 2016  
ANSI C63.26-2015  
KDB 971168 D01 Power Meas License Digital Systems v03r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 24 47 CFR FCC Part 27 47 CFR FCC Part 2			
Standard / Clause	Test Item	Result	Remark
FCC 47 CFR Part 2.1046 FCC 47 CFR Part 24.232 (c) FCC 47 CFR Part 27.50(d) FCC 47 CFR Part 27.50(h) FCC 47 CFR Part 27.50(c)	Effective Radiated Power and Equivalent Isotropically Radiated Power	N/A	Refer to Note 1
FCC 47 CFR Part 2.1047	Modulation Characteristics	N/A	Refer to Note 1
FCC 47 CFR Part 24.232 (d) FCC 47 CFR Part 27.50(d)	Peak to Average Ratio	N/A	Refer to Note 1
FCC 47 CFR Part 2.1049	Bandwidth	N/A	Refer to Note 1
FCC 47 CFR Part 2.1051 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note 1
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -17.68 dB at 96.93 MHz
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h) FCC 47 CFR Part 27.53(m) FCC 47 CFR Part 27.53(g)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -20.09 dB at 5042.04 MHz
FCC 47 CFR Part 2.1055 FCC 47 CFR Part 24.235 FCC 47 CFR Part 27.54	Frequency Stability	N/A	Refer to Note 1

### Note:

1. The only test item of Radiated Spurious Emissions tests was performed for this report. Other testing data please refer to SGS-CSRC Standards Technical Services (Suzhou) Co., Ltd. Report No.: SEWM2210000205RG02 (LTE Module, Brand: Fibocom, Model: FG360-NA, FCC ID: ZMOFG360NA08).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.95 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

## 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	5G Gateway
Brand	T-Mobile
Test Model	TMO-G4AR
Status of EUT	Engineering sample
Power Supply Rating	20Vdc or 15Vdc or 12Vdc or 9Vdc or 5Vdc (From adapter)

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RFBCMA-WTW-P23030799-7) is adding external antenna.
2. Base on the conducted power and all conducted result no change, the device WWAN conducted data leverage 5G module (Fibocom FG360-NA), and record ERP/EIRP in the report with external antenna to prove it not over the limit.
3. The EUT supports the following ENDC configuration.

	FCC 5G FR1			ENDC
	Band	SCS	Bandwidth (MHz)	
5G NR	n25	15kHz	5/10/15/20/25/30/40	Band 12, 66
	n41	30kHz	10/1520/30/40/50/60/70/80/90/100	Band 2, 66
	n48	30kHz	10/15/20/40	Band 2, 66
	n66	15kHz	5/10/15/20/25/30/40	Band 2, 12
	n71	15kHz	5/10/15/20	Band 2, 66

\*The ENDC configuration only selected the worst case for testing according to original module report. The test configuration is as follows: NR n25 + LTE B12, NR n41 + LTE B66, NR n48 + LTE B66, NR n66 + LTE B12, n71 + LTE B2.

4. The EUT uses following accessories.

AC Adapter 1		
Brand	Model	Specification
LUCENT TRANS	1A78	AC Input : 100~240V, 1.2A, 50-60Hz DC Output : 5.0V, 3.0A, 15W or 9.0V, 3.0A, 27W or 12.0V, 3.0A, 36W or 15.0V, 3.0A, 45W or 20.0V, 2.25A, 45W DC Output Cable : 1.85 m, non-shielded cable, W/O ferrite core Plug : US
AC Adapter 2		
Brand	Model	Specification
MASS POWER	PD045E-C1C0AVU	AC Input : 100~240V, 1.0A, 50-60Hz DC Output : 5.0V, 3.0A or 9.0V, 3.0A or 12.0V, 3.0A or 15.0V, 3.0A or 20.0V, 2.25A, 45W DC Output Cable : 1.8 m, non-shielded cable, W/O ferrite core Plug : US

\*The adapter 1 was chosen for final test.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	
WWAN Antenna (Internal)	B71 (TRx) (M2 )	PSA	RFPCA811609IMMB403_B	3.17	663-698 MHz	Monopole	ipex(MHF1)	
	B71 (Rx)(M1)		RFPCA811609IMMB402_A	3.10	663-698 MHz	Monopole	ipex(MHF1)	
	B71 (Rx) (D1)		RFPCA652018IMMB401_A	2.09	663-698 MHz	Monopole	ipex(MHF1)	
	B71 (Rx)(D2)		RFFPA656320IMMB401_B	2.01	663-698 MHz	Monopole	ipex(MHF1)	
	B12 (TRx)(M2 )	PSA	RFPCA811609IMMB403_B	3.34	698-716 MHz	Monopole	ipex(MHF1)	
	B12 (Rx)(D2)		RFFPA656320IMMB401_B	2.05	698-716 MHz	Monopole	ipex(MHF1)	
	B5 (TRx)(M2 )	PSA	RFPCA811609IMMB403_B	1.68	824-849 MHz	Monopole	ipex(MHF1)	
	B5 (Rx) (D2)		RFFPA656320IMMB401_B	0.63	824-849 MHz	Monopole	ipex(MHF1)	
	B4/B66 (TRx) (M2 )	PSA	RFPCA811609IMMB403_B	3.69	1710-1780 MHz	Monopole	ipex(MHF1)	
	B4/B66 (TRx) ( M1)		RFPCA811609IMMB402_A	5.13	1710-1780 MHz	Monopole	ipex(MHF1)	
	B4/B66 (Rx) (D1)		RFPCA652018IMMB401_A	4.26	1710-1780 MHz	Monopole	ipex(MHF1)	
	B4/B66 (Rx) (D2)		RFFPA656320IMMB401_B	4.10	1710-1780 MHz	Monopole	ipex(MHF1)	
	B2/B25 (TRx) (M2 )	PSA	RFPCA811609IMMB403_B	3.33	1850-1915 MHz	Monopole	ipex(MHF1)	
	B2/B25 (TRx) (M1)		RFPCA811609IMMB402_A	4.78	1850-1915 MHz	Monopole	ipex(MHF1)	
	B2/B25 (Rx) (D1)		RFPCA652018IMMB401_A	3.79	1850-1915 MHz	Monopole	ipex(MHF1)	
	B2/B25 (Rx) (D2)		RFFPA656320IMMB401_B	4.11	1850-1915 MHz	Monopole	ipex(MHF1)	
	B41 (TRx) (M2 )	PSA	RFPCA811609IMMB403_B	2.78	2496-2690 MHz	Monopole	ipex(MHF1)	
	B41 (TRx) (M1)		RFPCA811609IMMB402_A	3.02	2496-2690 MHz	Monopole	ipex(MHF1)	
	B41 (Rx) (Omni-Antenna HC10 )		RFPCA380906IMMB401_A	4.45	2496-2690 MHz	Dipole	ipex(MHF1)	
	B41 (Rx) (Omni-Antenna HC20)		RFPCA380912IMMB401_A	3.67	2496-2690 MHz	Dipole	ipex(MHF1)	
	B41 (Rx) (Semi-Antenna HC1S)		RFPCA474709IMMB401_A	7.59	2496-2690 MHz	Dipole	ipex(MHF1)	
	B41 (Rx) (Semi-Antenna HC2S )		RFPCA474709IMMB401_A	7.76	2496-2690 MHz	Dipole	ipex(MHF1)	
	B48 (TRx) (M2 )		PSA	RFPCA811609IMMB403_B	0.94	3550-3700 MHz	Monopole	ipex(MHF1)
	B48 (TRx) (M1)			RFPCA811609IMMB402_A	1.02	3550-3700 MHz	Monopole	ipex(MHF1)
	B48 (Rx) (Omni-Antenna HC10 )	RFPCA380906IMMB401_A		4.64	3550-3700 MHz	Dipole	ipex(MHF1)	
	B48 (Rx) (Omni-Antenna HC20)	RFPCA380912IMMB401_A		4.03	3550-3700 MHz	Dipole	ipex(MHF1)	
	B48 (Rx) (Semi-Antenna HC1S)	RFPCA474709IMMB401_A		7.67	3550-3700 MHz	Dipole	ipex(MHF1)	
	B48 (Rx) (Semi-Antenna HC2S)	RFPCA474709IMMB401_A		8.01	3550-3700 MHz	Dipole	ipex(MHF1)	
	B77 (TRx) (M2 )	PSA	RFPCA811609IMMB403_B	0.84	3300-4200 MHz	Monopole	ipex(MHF1)	
	B77(TRx) (M1)		RFPCA811609IMMB402_A	0.91	3300-4200 MHz	Monopole	ipex(MHF1)	
	B77 (Rx) (Omni-Antenna HC10 )		RFPCA380906IMMB401_A	4.73	3300-4200 MHz	Dipole	ipex(MHF1)	
	B77 (Rx) (Omni-Antenna HC20)		RFPCA380912IMMB401_A	4.14	3300-4200 MHz	Dipole	ipex(MHF1)	
B77 (Rx) (Semi-Antenna HC1S )	RFPCA474709IMMB401_A		7.98	3300-4200 MHz	Dipole	ipex(MHF1)		
B77 (Rx) (Semi-Antenna HC2S)	RFPCA474709IMMB401_A		8.13	3300-4200 MHz	Dipole	ipex(MHF1)		

\*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

\*Only B2/B4/B25 bands support 1TX diversity.



Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency range	Antenna Type	Connector Type
WWAN Antenna (External)	B71	TAOGLAS	ANT1	0.80	663-698 MHz	PIFA	ipex(MHF)
	B71		ANT2	1.50	663-698 MHz	PIFA	ipex(MHF)
	B71		ANT3	1.90	663-698 MHz	PIFA	ipex(MHF)
	B71		ANT4	1.40	663-698 MHz	PIFA	ipex(MHF)
	B12	TAOGLAS	ANT1	1.20	698-716 MHz	PIFA	ipex(MHF)
	B12		ANT2	1.40	698-716 MHz	PIFA	ipex(MHF)
	B12		ANT3	0.80	698-716 MHz	PIFA	ipex(MHF)
	B12		ANT4	0.80	698-716 MHz	PIFA	ipex(MHF)
	B5	TAOGLAS	ANT1	-1.00	824-849 MHz	PIFA	ipex(MHF)
	B5		ANT2	-1.80	824-849 MHz	PIFA	ipex(MHF)
	B5		ANT3	1.50	824-849 MHz	PIFA	ipex(MHF)
	B5		ANT4	-1.70	824-849 MHz	PIFA	ipex(MHF)
	B4/B66	TAOGLAS	ANT1	4.40	1710-1780 MHz	PIFA	ipex(MHF)
	B4/B66		ANT2	3.70	1710-1780 MHz	PIFA	ipex(MHF)
	B4/B66		ANT3	4.60	1710-1780 MHz	PIFA	ipex(MHF)
	B4/B66		ANT4	3.80	1710-1780 MHz	PIFA	ipex(MHF)
	B2/B25	TAOGLAS	ANT1	4.00	1850-1915 MHz	PIFA	ipex(MHF)
	B2/B25		ANT2	3.50	1850-1915 MHz	PIFA	ipex(MHF)
	B2/B25		ANT3	4.60	1850-1915 MHz	PIFA	ipex(MHF)
	B2/B25		ANT4	3.60	1850-1915 MHz	PIFA	ipex(MHF)
	B41	TAOGLAS	ANT1	3.90	2496-2690 MHz	PIFA	ipex(MHF)
	B41		ANT2	3.80	2496-2690 MHz	PIFA	ipex(MHF)
	B41		ANT3	2.90	2496-2690 MHz	PIFA	ipex(MHF)
	B41		ANT4	4.00	2496-2690 MHz	PIFA	ipex(MHF)
	B48	TAOGLAS	ANT1	2.60	3550-3700 MHz	PIFA	ipex(MHF)
	B48		ANT2	2.30	3550-3700 MHz	PIFA	ipex(MHF)
	B48		ANT3	1.70	3550-3700 MHz	PIFA	ipex(MHF)
	B48		ANT4	2.40	3550-3700 MHz	PIFA	ipex(MHF)
	B77	TAOGLAS	ANT1	3.20	3300-4200 MHz	PIFA	ipex(MHF)
	B77		ANT2	2.80	3300-4200 MHz	PIFA	ipex(MHF)
	B77		ANT3	3.80	3300-4200 MHz	PIFA	ipex(MHF)
	B77		ANT4	2.90	3300-4200 MHz	PIFA	ipex(MHF)

\* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

\* Only B2/B4/B25 bands support 1TX diversity.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis

#### For NR n25+LTE Band 12

##### NR n25

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	374000 (1870.00 MHz)	40 MHz	QPSK	1 RB
RE Above 1GHz	370500 (1852.50 MHz) 376500 (1882.50 MHz) 382500 (1912.50 MHz)	5 MHz	QPSK	1 RB
	372000 (1860.00 MHz) 376500 (1882.50 MHz) 379000 (1905.00 MHz)	20 MHz	QPSK	1 RB
	374000 (1870.00 MHz) 376500 (1882.50 MHz) 379000 (1895.00 MHz)	40 MHz	QPSK	1 RB

##### LTE Band 12

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	23035 (701.50 MHz)	5 MHz	QPSK	1 RB
RE Above 1GHz	23017 (699.70 MHz) 23095 (707.50 MHz) 23173 (715.30 MHz)	1.4 MHz	QPSK	1 RB
	23035 (701.50 MHz) 23095 (707.50 MHz) 23155 (713.50 MHz)	5 MHz	QPSK	1 RB
	23060 (704.00 MHz) 23095 (707.50 MHz) 23130 (711.00 MHz)	10 MHz	QPSK	1 RB

### For NR n41+LTE Band 66

#### NR n41

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	504204 (2521.02 MHz)	50 MHz	QPSK	1 RB
RE Above 1GHz	500202 (2501.01 MHz) 518598 (2592.99 MHz) 537000 (2685.00 MHz)	10 MHz	QPSK	1 RB
	504204 (2521.02 MHz) 518598 (2592.99 MHz) 532998 (2664.99 MHz)	50 MHz	QPSK	1 RB
	509202 (2546.01 MHz) 518598 (2592.99 MHz) 528000 (2640.00 MHz)	100 MHz	QPSK	1 RB

### For LTE Band 66

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	132665 (1779.30 MHz)	1.4 MHz	QPSK	1 RB
RE Above 1GHz	131979 (1710.70 MHz) 132322 (1745.00 MHz) 132665 (1779.30 MHz)	1.4 MHz	QPSK	1 RB
	131997 (1712.50 MHz) 132322 (1745.00 MHz) 132647 (1777.50 MHz)	5 MHz	QPSK	1 RB
	132072 (1720.00 MHz) 132322 (1745.00 MHz) 132572 (1770.00 MHz)	20 MHz	QPSK	1 RB

## For NR n66+LTE Band 12

### NR n66

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	355500 (1777.50 MHz)	5 MHz	QPSK	1 RB
RE Above 1GHz	342500 (1712.50 MHz) 349000 (1745.00 MHz) 355500 (1777.50 MHz)	5 MHz	QPSK	1 RB
	344000 (1720.00 MHz) 349000 (1745.00 MHz) 354000 (1770.00 MHz)	20 MHz	QPSK	1 RB
	346000 (1730.00 MHz) 349000 (1745.00 MHz) 352000 (1760.00 MHz)	40 MHz	QPSK	1 RB

### LTE Band 12

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	23017 (699.70 MHz)	1.4 MHz	QPSK	1 RB
RE Above 1GHz	23017 (699.70 MHz) 23095 (707.50 MHz) 23173 (715.30 MHz)	1.4 MHz	QPSK	1 RB
	23035 (701.50 MHz) 23095 (707.50 MHz) 23155 (713.50 MHz)	5 MHz	QPSK	1 RB
	23060 (704.00 MHz) 23095 (707.50 MHz) 23130 (711.00 MHz)	10 MHz	QPSK	1 RB

## For NR n71+ LTE Band 2

### NR n71

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	137600 (688.00 MHz)	20 MHz	QPSK	1 RB
RE Above 1GHz	133100 (665.50 MHz) 136100 (680.50 MHz) 139100 (695.50 MHz)	5 MHz	QPSK	1 RB
	134600 (673.00 MHz) 136100 (680.50 MHz) 137600 (688.00 MHz)	20 MHz	QPSK	1 RB


### For LTE Band 2

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
RE Below 1GHz	18607 (1850.70 MHz)	1.4 MHz	QPSK	1 RB
RE Above 1GHz	18607 (1850.70 MHz) 18900 (1880.00 MHz) 19193 (1909.30 MHz)	1.4 MHz	QPSK	1 RB
	18625 (1852.50 MHz) 18900 (1880.00 MHz) 19175 (1907.50 MHz)	5 MHz	QPSK	1 RB
	18700 (1860.00 MHz) 18900 (1880.00 MHz) 19100 (1900.00 MHz)	20 MHz	QPSK	1 RB

### 3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer//5G Wireless Test Platforms to test the connection when it is powered on.

### 3.5 Connection Diagram of EUT and Peripheral Devices

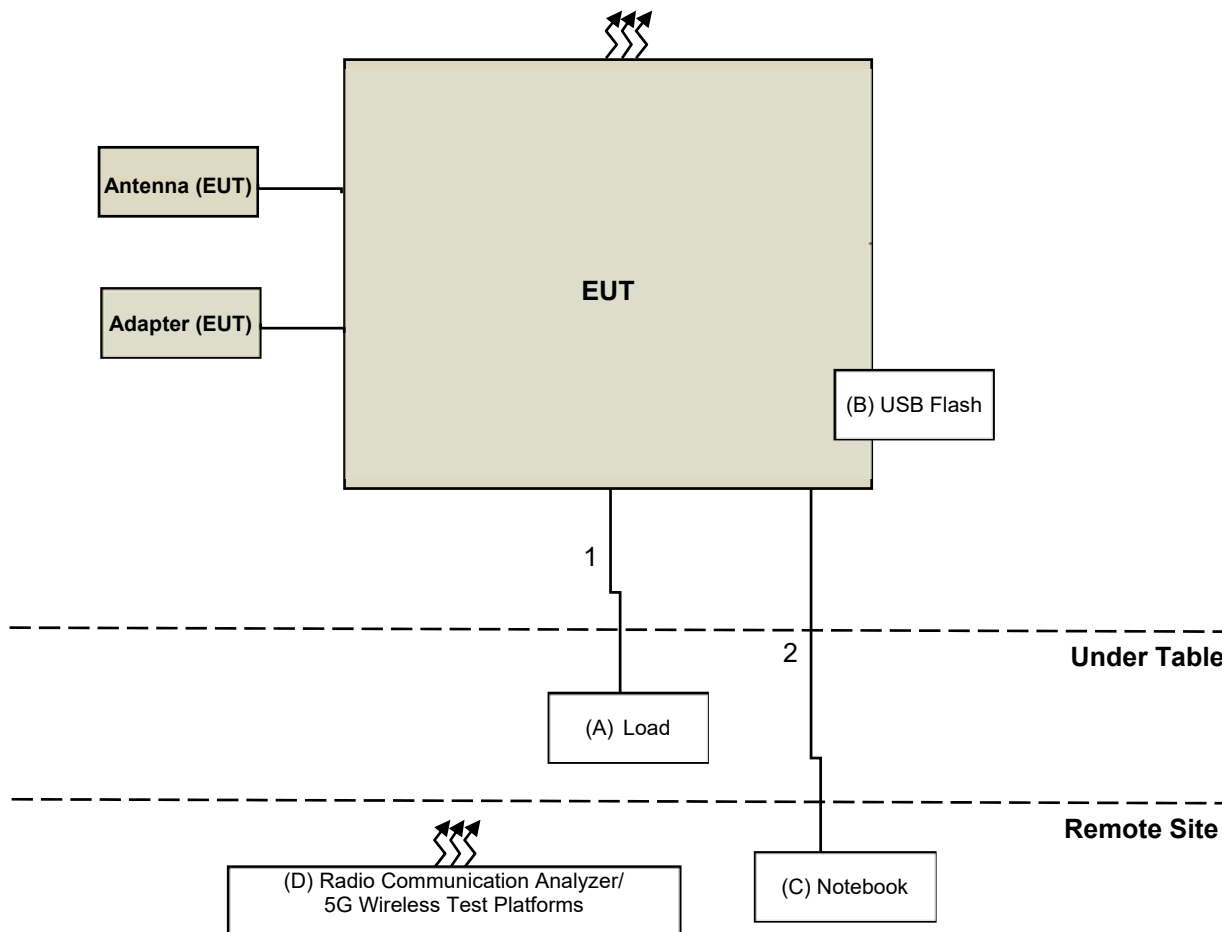

### 3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Load	NA	NA	NA	NA	Provided by Lab
B	USB Flash	SanDisk G	SDDDC3-032	NA	NA	Provided by Lab
C	Notebook	Lenovo	80Q7	PF0KUGU6	FCC DoC Approved	Provided by Lab
D	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	Provided by Lab
	5G Wireless Test Platforms	Keysight	E7515B	MY60102114	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	1.5	No	0	Provided by Lab
2	RJ-45 Cable	1	10	No	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	2022/10/21	2023/10/20
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/1/3	2024/1/2
Loop Antenna Electro-Metrics	EM-6879	269	2022/9/19	2023/9/18
Loop Antenna TESEQ	HLA 6121	45745	2022/7/27	2023/7/26
MXE EMI Receiver KEYSIGHT	N9038A	MY55420137	2023/5/3	2024/5/2
Preamplifier EMCI	EMC 330H	980112	2022/10/1	2023/9/30
	EMC001340	980201	2022/9/23	2023/9/22
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	2023/1/7	2024/1/6
RF Coaxial Cable WORKEN	8D-FB	Cable-Ch10-01	2022/10/1	2023/9/30
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2023/5/18	2024/5/17

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2023/5/23 ~ 2023/5/24

#### 4.2 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2022/11/13	2023/11/12
	BBHA 9170	148	2022/11/13	2023/11/12
Pre-Amplifier EMCI	EMC 184045	980116	2022/10/1	2023/9/30
Pre-Amplifier EMCI	EMC 012645	980115	2022/10/1	2023/9/30
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2022/7/9	2023/7/8
	EMC102-KM-KM-3000	150929	2022/7/9	2023/7/8
	EMC104-SM-SM- 8000+3000	171005	2022/10/1	2023/9/30
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2022/10/1	2023/9/30
RF FLITER MICRO-TRONICS	BRM17690	004	2023/1/11	2024/1/10
	BRM50716	060	2023/1/11	2024/1/10
Signal Analyzer Agilent	N9010A	MY52220207	2023/1/3	2024/1/2
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Test Receiver KEYSIGHT	N9038A	MY55420137	2022/4/27	2023/4/26
			2023/5/3	2024/5/2
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A
5G Wireless Test Platforms Keysight	E7515B	MY60102114	2023/5/18	2024/5/17

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2023/5/24



## 5 Limits of Test Items

### 5.1 Radiated Spurious Emissions below 1GHz

#### For NR n25, LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13$  dBm.

#### For NR n71, LTE Band 12:

According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. The limit of emissions is equal to  $-13$  dBm.

#### For NR n41:

According to FCC 47 CFR part 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log(P)$  dB. The emission limit equal to  $-25$  dBm.

#### For NR n66, LTE Band 66:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log(P)$  dB. The limit of emission is equal to  $-13$  dBm.

### 5.2 Radiated Spurious Emissions above 1GHz

#### For NR n25, LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13$  dBm.

#### For NR n41:

According to FCC 47 CFR part 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log(P)$  dB. The emission limit equal to  $-25$  dBm.

#### For NR n66, LTE Band 66:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log(P)$  dB. The limit of emission is equal to  $-13$  dBm.

#### For NR n71, LTE Band 12:


According to FCC 47 CFR part 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. The limit of emissions is equal to  $-13$  dBm.

## 6 Test Arrangements

### 6.1 Radiated Spurious Emissions below 1GHz

#### 6.1.1 Test Setup

##### For radiated emission 30 MHz to 1 GHz

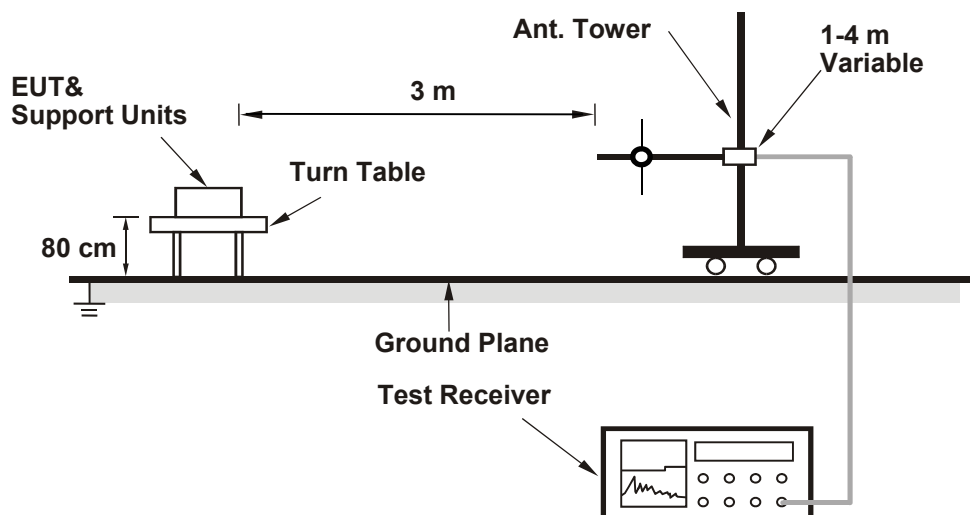

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 6.1.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.


#### Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
- The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

## 6.2 Radiated Spurious Emissions above 1GHz

### 6.2.1 Test Setup

#### For radiated emission above 1 GHz

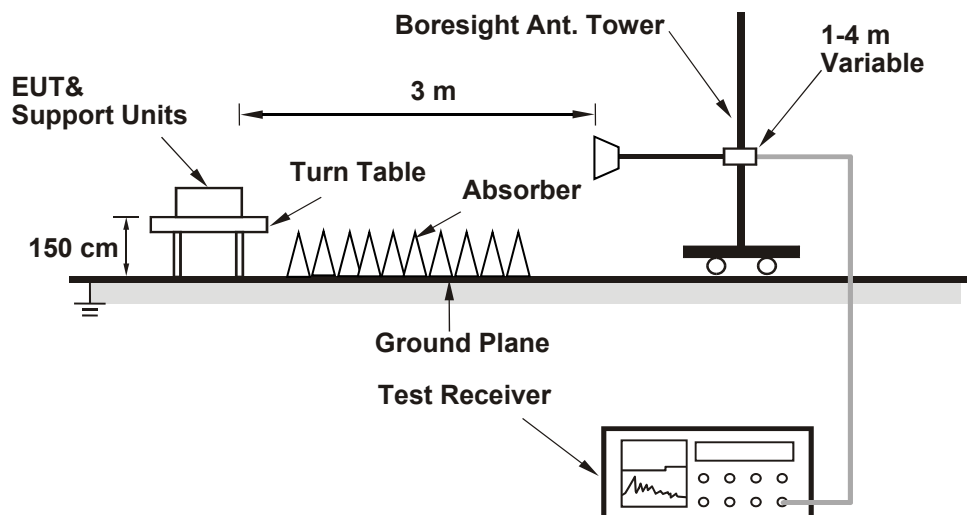

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.2.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
- $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

#### Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

## 7 Test Results of Test Item

### 7.1 Radiated Spurious Emissions below 1GHz


#### 7.1.1 NR n25 SCS 15 kHz+LTE Band 12

<b>RF Mode</b>	NR n25 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 374000 : 1870 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.86	-46.51	-13.00	-33.51	1.00 H	96	62.55	-109.06
2	92.08	-45.09	-13.00	-32.09	2.00 H	90	67.95	-113.04
3	128.94	-46.67	-13.00	-33.67	1.50 H	2	62.15	-108.82
4	292.87	-46.57	-13.00	-33.57	1.00 H	118	60.63	-107.20
5	323.91	-50.99	-13.00	-37.99	2.50 H	315	55.41	-106.40
6	588.72	-44.47	-13.00	-31.47	1.50 H	306	56.40	-100.87

#### Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

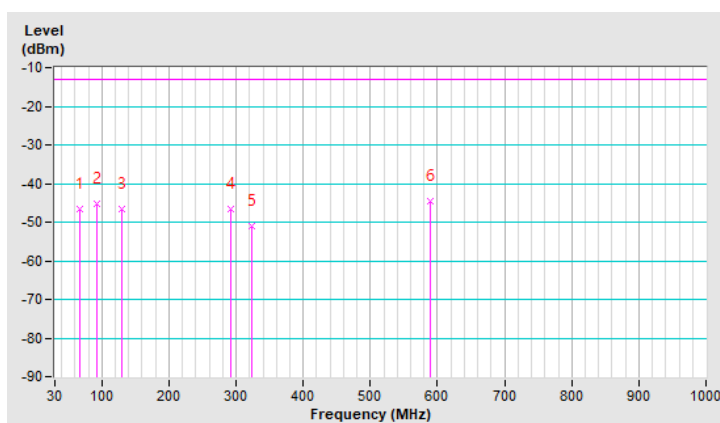


<b>RF Mode</b>	NR n25 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 374000 : 1870 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.45	-13.00	-33.45	1.00 V	208	61.20	-107.65
2	91.11	-38.31	-13.00	-25.31	1.50 V	196	74.87	-113.18
3	129.91	-47.62	-13.00	-34.62	3.00 V	85	61.05	-108.67
4	292.87	-46.63	-13.00	-33.63	1.00 V	56	60.57	-107.20
5	324.88	-48.80	-13.00	-35.80	2.50 V	137	57.57	-106.37
6	585.81	-43.61	-13.00	-30.61	2.00 V	35	57.33	-100.94

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

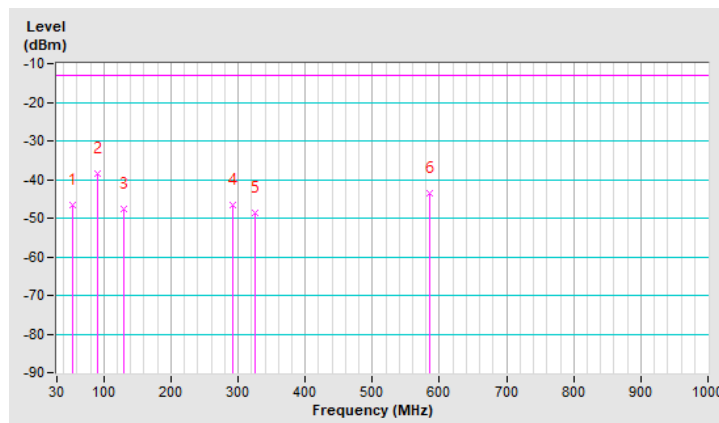


<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23035 : 701.5 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70.3% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	67.83	-48.89	-13.00	-35.89	1.00 H	162	62.56	-111.45
2	93.05	-47.14	-13.00	-34.14	2.00 H	78	68.00	-115.14
3	129.91	-48.53	-13.00	-35.53	1.00 H	82	62.29	-110.82
4	293.84	-47.87	-13.00	-34.87	1.00 H	106	61.45	-109.32
5	323.91	-53.29	-13.00	-40.29	1.50 H	277	55.26	-108.55
6	589.69	-44.15	-13.00	-31.15	2.00 H	39	58.85	-103.00

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

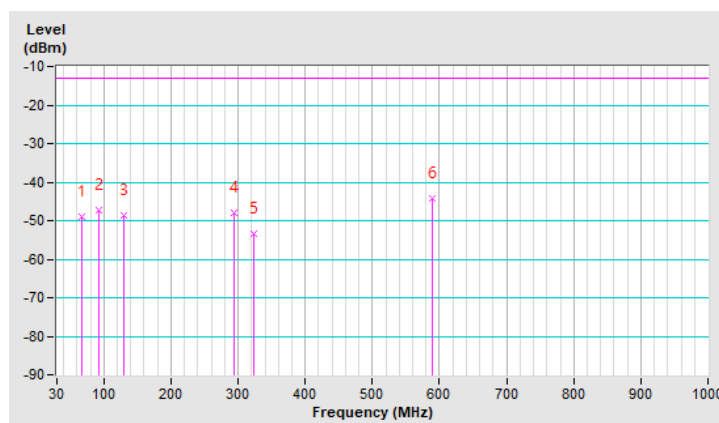


<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23035 : 701.5 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70.3% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	92.08	-40.22	-13.00	-27.22	1.00 V	206	74.97	-115.19
2	128.94	-49.95	-13.00	-36.95	3.00 V	118	61.02	-110.97
3	181.32	-52.05	-13.00	-39.05	2.50 V	247	59.56	-111.61
4	294.81	-48.57	-13.00	-35.57	1.50 V	56	60.74	-109.31
5	324.88	-51.46	-13.00	-38.46	2.00 V	288	57.06	-108.52
6	587.75	-46.85	-13.00	-33.85	2.00 V	16	56.19	-103.04

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

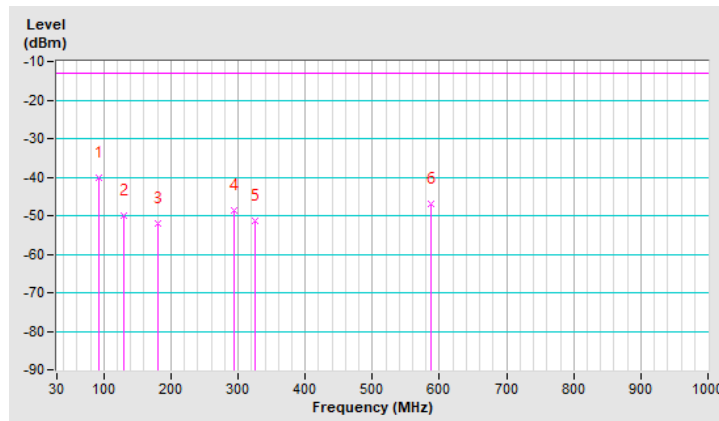

**7.1.2 NR n41 SCS 30 kHz+LTE Band 66**


<b>RF Mode</b>	NR n41 Channel Bandwidth: 50MHz	<b>Channel</b>	CH 504204 : 2521.02 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	98.87	-49.87	-25.00	-24.87	1.50 H	109	62.33	-112.20
2	150.28	-54.77	-25.00	-29.77	1.00 H	133	52.89	-107.66
3	248.25	-48.19	-25.00	-23.19	2.00 H	34	60.74	-108.93
4	493.66	-59.29	-25.00	-34.29	1.00 H	36	43.04	-102.33
5	631.40	-58.74	-25.00	-33.74	1.00 H	186	41.14	-99.88
6	854.50	-55.91	-25.00	-30.91	2.00 H	268	40.90	-96.81
7	935.01	-54.46	-25.00	-29.46	1.50 H	129	41.52	-95.98

**Remarks:**

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

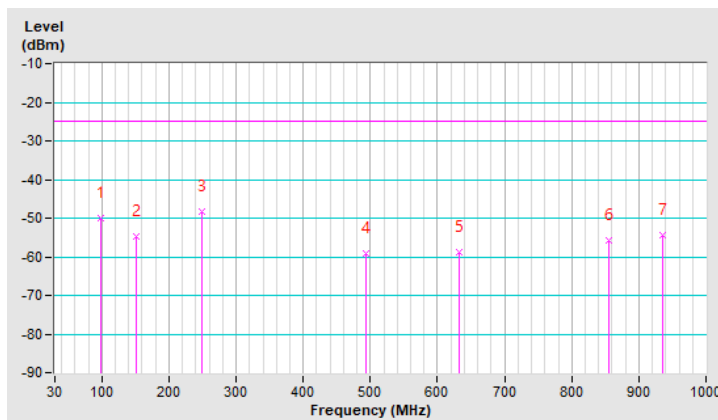




<b>RF Mode</b>	NR n41 Channel Bandwidth: 50MHz	<b>Channel</b>	CH 504204 : 2521.02 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-46.24	-25.00	-21.24	1.50 V	131	61.95	-108.19
2	<b>96.93</b>	<b>-42.68</b>	<b>-25.00</b>	<b>-17.68</b>	<b>1.00 V</b>	<b>56</b>	<b>69.70</b>	<b>-112.38</b>
3	150.28	-50.06	-25.00	-25.06	1.00 V	176	57.60	-107.66
4	247.28	-47.69	-25.00	-22.69	2.00 V	30	61.27	-108.96
5	592.60	-59.74	-25.00	-34.74	1.00 V	2	41.04	-100.78
6	833.16	-55.22	-25.00	-30.22	2.00 V	2	41.53	-96.75

**Remarks:**

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

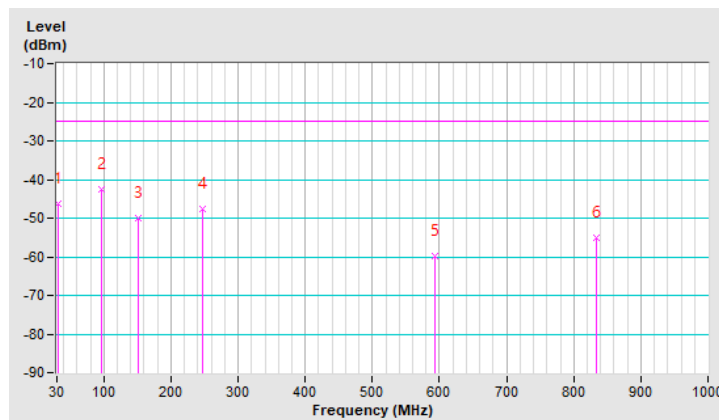


<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 132665 : 1779.3 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	-46.40	-13.00	-33.40	1.00 H	256	65.05	-111.45
2	92.08	-44.38	-13.00	-31.38	2.00 H	97	68.66	-113.04
3	130.88	-46.98	-13.00	-33.98	1.00 H	266	61.68	-108.66
4	293.84	-45.74	-13.00	-32.74	1.00 H	112	61.43	-107.17
5	323.91	-51.06	-13.00	-38.06	1.50 H	290	55.34	-106.40
6	591.63	-44.18	-13.00	-31.18	1.50 H	31	56.62	-100.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

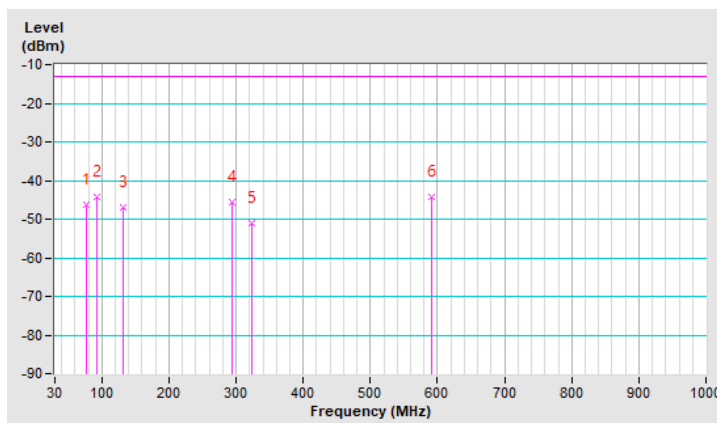


<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 132665 : 1779.3 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.94	-13.00	-33.94	1.00 V	2	60.71	-107.65
2	93.05	-38.49	-13.00	-25.49	1.00 V	218	74.50	-112.99
3	129.91	-47.99	-13.00	-34.99	2.00 V	209	60.68	-108.67
4	293.84	-46.37	-13.00	-33.37	1.50 V	56	60.80	-107.17
5	324.88	-49.38	-13.00	-36.38	2.00 V	102	56.99	-106.37
6	585.81	-42.60	-13.00	-29.60	2.50 V	37	58.34	-100.94

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

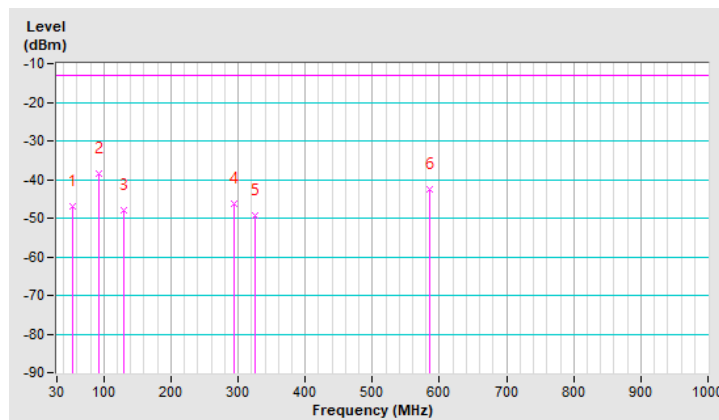

## 7.1.3 NR n66 SCS 15 kHz+LTE Band 12


<b>RF Mode</b>	NR n66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 355500 : 1777.50 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-46.52	-13.00	-33.52	1.00 H	3	65.16	-111.68
2	92.08	-44.43	-13.00	-31.43	2.00 H	77	68.61	-113.04
3	129.91	-47.12	-13.00	-34.12	1.50 H	282	61.55	-108.67
4	293.84	-46.47	-13.00	-33.47	1.00 H	89	60.70	-107.17
5	324.88	-51.48	-13.00	-38.48	1.00 H	167	54.89	-106.37
6	585.81	-53.96	-13.00	-40.96	2.00 H	2	46.98	-100.94

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

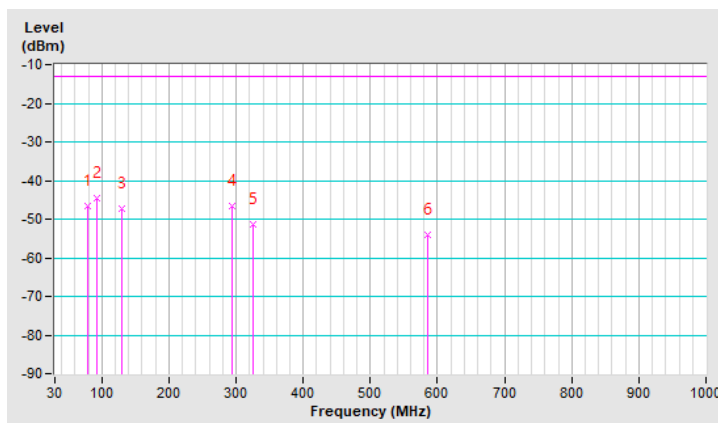


<b>RF Mode</b>	NR n66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 355500 : 1777.50 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	92.08	-38.23	-13.00	-25.23	1.00 V	193	74.81	-113.04
2	128.94	-48.06	-13.00	-35.06	3.00 V	140	60.76	-108.82
3	181.32	-50.28	-13.00	-37.28	1.50 V	223	59.18	-109.46
4	294.81	-46.88	-13.00	-33.88	2.00 V	253	60.28	-107.16
5	322.94	-48.82	-13.00	-35.82	2.00 V	2	57.62	-106.44
6	590.66	-56.26	-13.00	-43.26	1.00 V	58	44.57	-100.83

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

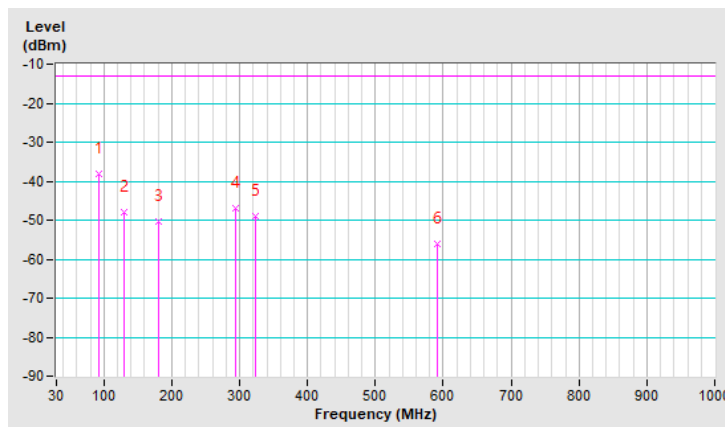


<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23017 : 699.70 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	96.93	-51.86	-13.00	-38.86	1.50 H	109	62.67	-114.53
2	150.28	-56.77	-13.00	-43.77	1.00 H	141	53.04	-109.81
3	248.25	-50.53	-13.00	-37.53	1.00 H	38	60.55	-111.08
4	409.27	-65.54	-13.00	-52.54	2.00 H	161	41.19	-106.73
5	636.25	-60.97	-13.00	-47.97	1.00 H	324	40.94	-101.91
6	894.27	-57.20	-13.00	-44.20	2.00 H	227	41.30	-98.50

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

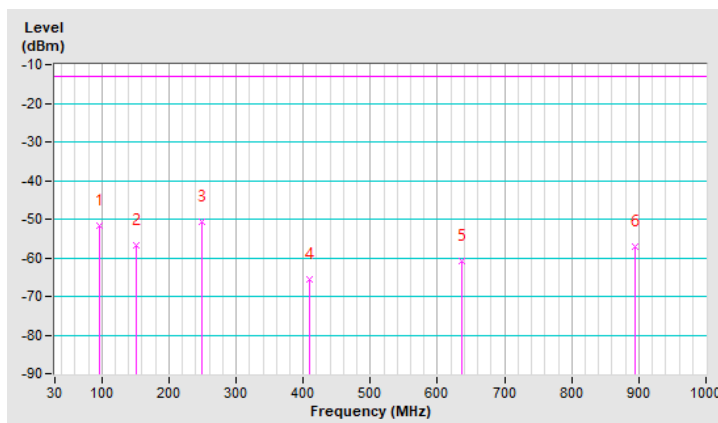


<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23017 : 699.70 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	-48.61	-13.00	-35.61	2.00 V	102	61.64	-110.25
2	88.20	-44.32	-13.00	-31.32	1.00 V	150	71.10	-115.42
3	148.34	-52.90	-13.00	-39.90	1.50 V	176	57.01	-109.91
4	249.22	-50.88	-13.00	-37.88	1.00 V	28	60.17	-111.05
5	583.87	-61.56	-13.00	-48.56	2.00 V	62	41.56	-103.12
6	941.80	-57.40	-13.00	-44.40	2.00 V	19	40.57	-97.97

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

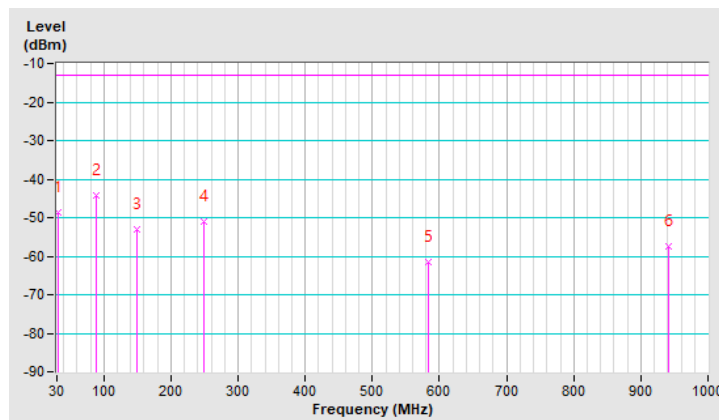


**7.1.4 NR n71 SCS 15 kHz+LTE Band 2**

<b>RF Mode</b>	NR n71 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 137600 : 688.00 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.90	-51.65	-13.00	-38.65	2.00 H	107	62.87	-114.52
2	148.34	-56.07	-13.00	-43.07	1.00 H	152	53.84	-109.91
3	250.19	-51.84	-13.00	-38.84	1.50 H	30	59.19	-111.03
4	555.74	-62.48	-13.00	-49.48	1.00 H	175	41.16	-103.64
5	818.61	-57.86	-13.00	-44.86	2.00 H	325	41.01	-98.87
6	902.03	-57.06	-13.00	-44.06	1.00 H	220	41.39	-98.45

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

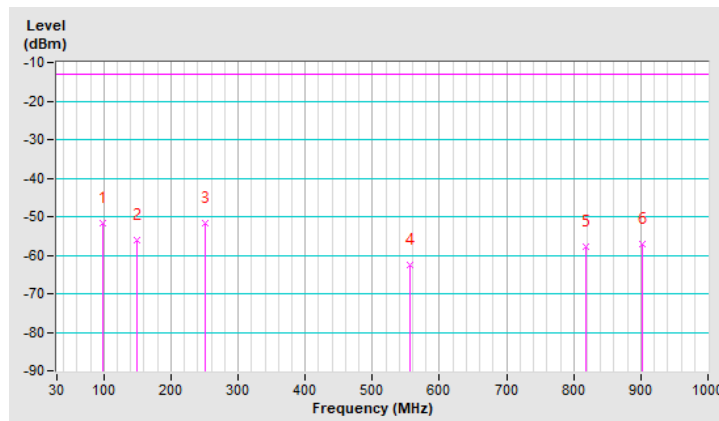




<b>RF Mode</b>	NR n71 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 137600 : 688.00 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-48.50	-13.00	-35.50	2.00 V	103	61.84	-110.34
2	89.17	-44.71	-13.00	-31.71	1.00 V	178	70.71	-115.42
3	150.28	-53.64	-13.00	-40.64	1.50 V	185	56.17	-109.81
4	250.19	-51.96	-13.00	-38.96	1.00 V	41	59.07	-111.03
5	594.54	-61.58	-13.00	-48.58	1.00 V	320	41.31	-102.89
6	893.30	-56.13	-13.00	-43.13	1.50 V	198	42.38	-98.51

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
- The ERP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

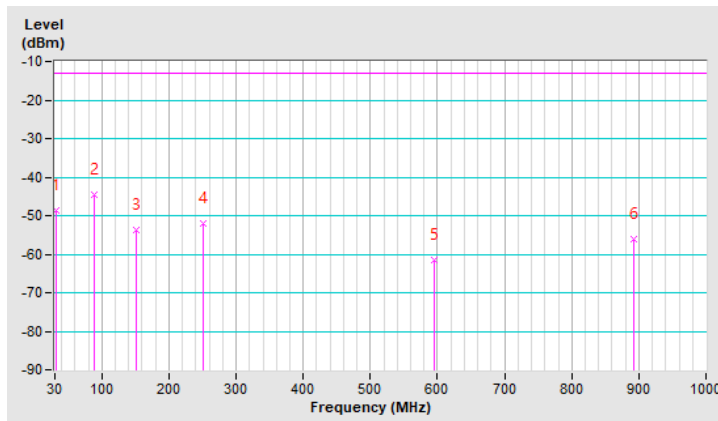


<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18607 : 1850.7MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.90	-50.56	-13.00	-37.56	1.50 H	101	61.81	-112.37
2	148.34	-55.18	-13.00	-42.18	1.00 H	182	52.58	-107.76
3	248.25	-50.15	-13.00	-37.15	2.00 H	34	58.78	-108.93
4	494.63	-57.24	-13.00	-44.24	1.00 H	32	45.08	-102.32
5	652.74	-55.53	-13.00	-42.53	2.00 H	112	44.08	-99.61
6	903.97	-52.55	-13.00	-39.55	1.50 H	288	43.71	-96.26

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

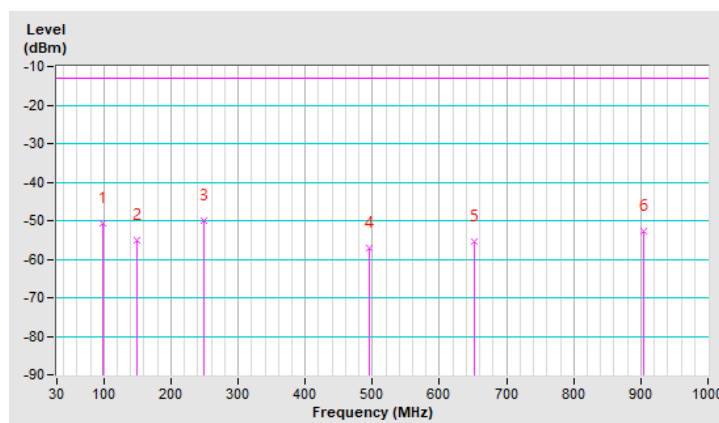


<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18607 : 1850.7MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-46.96	-13.00	-33.96	1.50 V	154	61.04	-108.00
2	87.23	-42.53	-13.00	-29.53	1.00 V	148	70.69	-113.22
3	149.31	-51.59	-13.00	-38.59	2.00 V	167	56.10	-107.69
4	248.25	-49.97	-13.00	-36.97	1.00 V	36	58.96	-108.93
5	558.65	-57.90	-13.00	-44.90	1.50 V	128	43.55	-101.45
6	852.56	-53.13	-13.00	-40.13	2.00 V	250	43.68	-96.81

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The EIRP levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

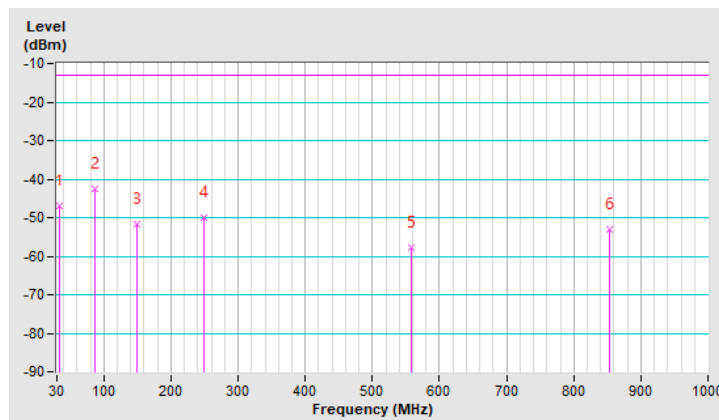

## 7.2 Radiated Spurious Emissions above 1GHz

### 7.2.1 NR n25 SCS 15 kHz+LTE Band 12

<b>RF Mode</b>	NR n25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 370500 : 1852.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-49.09	-13.00	-36.09	1.56 H	245	58.63	-107.72

#### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-50.57	-13.00	-37.57	2.65 V	227	57.15	-107.72

#### Remarks:

- EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
- Margin value = EIRP – Limit value
- The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-48.88	-13.00	-35.88	1.25 H	152	58.93	-107.81
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.35	-13.00	-36.35	2.41 V	220	58.46	-107.81

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n25 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 382500 : 1912.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-49.21	-13.00	-36.21	2.12 H	105	58.46	-107.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3825.00	-50.41	-13.00	-37.41	1.52 V	224	57.26	-107.67

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 372000 : 1860 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-49.59	-13.00	-36.59	1.93 H	274	58.17	-107.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-50.42	-13.00	-37.42	1.41 V	156	57.34	-107.76

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.09	-13.00	-36.09	3.24 H	152	58.72	-107.81
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-50.55	-13.00	-37.55	2.21 V	278	57.26	-107.81

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n25 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 381000 : 1905 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-49.65	-13.00	-36.65	1.23 H	227	58.10	-107.75
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3810.00	-50.30	-13.00	-37.30	2.21 V	67	57.45	-107.75

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n25 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 374000 : 1870 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3740.00	-49.53	-13.00	-36.53	1.65 H	228	58.27	-107.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3740.00	-47.28	-13.00	-34.28	2.07 V	185	60.52	-107.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n25 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-49.56	-13.00	-36.56	1.82 H	223	58.25	-107.81
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-50.63	-13.00	-37.63	2.52 V	188	57.18	-107.81

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n25 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 379000 : 1895 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3790.00	-49.21	-13.00	-36.21	1.65 H	225	58.59	-107.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3790.00	-50.52	-13.00	-37.52	2.25 V	188	57.28	-107.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23017 : 699.7 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-56.88	-13.00	-43.88	1.52 H	252	59.73	-116.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-59.20	-13.00	-46.20	2.52 V	107	57.41	-116.61

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)  
+ 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-57.23	-13.00	-44.23	1.52 H	227	59.41	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.23	-13.00	-46.23	2.85 V	115	57.41	-116.64

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23173 : 715.3 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.00	-57.20	-13.00	-44.20	1.52 H	227	59.46	-116.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.00	-59.31	-13.00	-46.31	2.52 V	278	57.35	-116.66

**Remarks:**

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23035 : 701.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-56.80	-13.00	-43.80	1.20 H	228	59.82	-116.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-59.17	-13.00	-46.17	2.78 V	325	57.45	-116.62

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.





<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-57.46	-13.00	-44.46	1.74 H	232	59.18	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.28	-13.00	-46.28	2.27 V	158	57.36	-116.64

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23155 : 713.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-57.39	-13.00	-44.39	2.12 H	165	59.27	-116.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-59.43	-13.00	-46.43	1.52 V	117	57.23	-116.66

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23060 : 704 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-56.89	-13.00	-43.89	2.25 H	12	59.74	-116.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-58.98	-13.00	-45.98	1.25 V	227	57.65	-116.63

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-56.86	-13.00	-43.86	2.41 H	265	59.78	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.41	-13.00	-46.41	2.12 V	157	57.23	-116.64

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23130 : 711 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-57.37	-13.00	-44.37	2.52 H	322	59.28	-116.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-59.13	-13.00	-46.13	1.52 V	264	57.52	-116.65

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

## 7.2.2 NR n41 SCS 30 kHz+LTE Band 66

<b>RF Mode</b>	NR n41 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 500202 : 2501.01 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5002.02	-45.72	-25.00	-20.72	1.52 H	264	58.32	-104.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5002.02	-47.77	-25.00	-22.77	2.62 V	154	56.27	-104.04

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n41 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 518598 : 2592.99 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-45.49	-25.00	-20.49	1.57 H	265	58.47	-103.96
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-47.48	-25.00	-22.48	2.58 V	166	56.48	-103.96

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n41 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 537000 : 2685.00 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5370.00	-45.71	-25.00	-20.71	2.52 H	153	58.49	-104.20
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5370.00	-47.92	-25.00	-22.92	3.25 V	287	56.28	-104.20

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n41 Channel Bandwidth: 50MHz	<b>Channel</b>	CH 504204 : 2521.02 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5042.04	-45.09	-25.00	-20.09	1.58 H	259	58.78	-103.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5042.04	-47.50	-25.00	-22.50	2.04 V	222	56.37	-103.87

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n41 Channel Bandwidth: 50MHz	<b>Channel</b>	CH 518598 : 2592.99 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-45.40	-25.00	-20.40	2.52 H	123	58.56	-103.96
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-47.24	-25.00	-22.24	1.23 V	264	56.72	-103.96

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n41 Channel Bandwidth: 50MHz	<b>Channel</b>	CH 532998 : 2664.99 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5329.98	-45.73	-25.00	-20.73	2.41 H	152	58.43	-104.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5329.98	-47.89	-25.00	-22.89	1.52 V	287	56.27	-104.16

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n41 Channel Bandwidth: 100MHz	<b>Channel</b>	CH 509202 : 2546.01 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5092.02	-45.10	-25.00	-20.10	2.41 H	119	58.39	-103.49
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5092.02	-47.21	-25.00	-22.21	1.56 V	241	56.28	-103.49

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n41 Channel Bandwidth: 100MHz	<b>Channel</b>	CH 518598 : 2592.99 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-45.24	-25.00	-20.24	1.57 H	123	58.72	-103.96
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5185.98	-47.19	-25.00	-22.19	2.05 V	168	56.77	-103.96

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n41 Channel Bandwidth: 100MHz	<b>Channel</b>	CH 528000 : 2640 MHz
<b>Frequency Range</b>	1 GHz ~ 27 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	-45.63	-25.00	-20.63	2.52 H	252	58.49	-104.12
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	-47.36	-25.00	-22.36	1.27 V	332	56.76	-104.12

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 131979 : 1710.7 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-44.51	-13.00	-31.51	2.32 H	274	64.29	-108.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.55	-13.00	-35.55	1.52 V	337	60.25	-108.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 132322 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-43.58	-13.00	-30.58	2.05 H	352	64.28	-107.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.34	-13.00	-34.34	1.96 V	120	60.52	-107.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.





<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 132665 : 1779.3 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-43.14	-13.00	-30.14	1.63 H	204	64.63	-107.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-47.49	-13.00	-34.49	2.04 V	152	60.28	-107.77

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 131997 : 1712.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-44.44	-13.00	-31.44	2.52 H	105	64.32	-108.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-48.59	-13.00	-35.59	2.52 V	62	60.17	-108.76

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 132322 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-43.23	-13.00	-30.23	2.14 H	256	64.63	-107.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.69	-13.00	-34.69	1.25 V	203	60.17	-107.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 132647 : 1777.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-45.19	-13.00	-32.19	2.87 H	111	62.56	-107.75
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-47.30	-13.00	-34.30	1.52 V	298	60.45	-107.75

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 132072 : 1720 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-44.32	-13.00	-31.32	2.42 H	158	64.28	-108.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.43	-13.00	-35.43	1.41 V	200	60.17	-108.60

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 132322 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-43.60	-13.00	-30.60	2.08 H	146	64.26	-107.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-47.34	-13.00	-34.34	1.04 V	17	60.52	-107.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 132572 : 1770 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-43.47	-13.00	-30.47	1.63 H	205	64.27	-107.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-49.39	-13.00	-36.39	2.99 V	171	58.35	-107.74

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

## 7.2.3 NR n66 SCS 15 kHz+LTE Band 12

<b>RF Mode</b>	NR n66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 342500 : 1712.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-52.40	-13.00	-39.40	1.53 H	252	56.36	-108.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-53.50	-13.00	-40.50	2.52 V	152	55.26	-108.76

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 349000 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.61	-13.00	-38.61	1.52 H	228	56.25	-107.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.62	-13.00	-39.62	2.46 V	169	55.24	-107.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n66 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 355500 : 1777.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-51.18	-13.00	-38.18	2.05 H	198	56.57	-107.75
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3555.00	-52.61	-13.00	-39.61	1.87 V	49	55.14	-107.75

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 344000 : 1720 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-52.25	-13.00	-39.25	2.87 H	169	56.35	-108.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-53.37	-13.00	-40.37	1.52 V	274	55.23	-108.60

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 349000 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-51.41	-13.00	-38.41	1.69 H	207	56.45	-107.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.51	-13.00	-39.51	1.35 V	228	55.35	-107.86

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n66 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 354000 : 1770 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-51.46	-13.00	-38.46	1.55 H	20	56.28	-107.74
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-52.66	-13.00	-39.66	1.78 V	205	55.08	-107.74

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n66 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 346000 : 1730 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3460.00	-54.10	-13.00	-41.10	1.55 H	205	56.37	-110.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3460.00	-55.05	-13.00	-42.05	2.14 V	163	55.42	-110.47

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	NR n66 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 349000 : 1745 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-53.44	-13.00	-40.44	2.63 H	222	56.57	-110.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-54.60	-13.00	-41.60	1.52 V	163	55.41	-110.01

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	NR n66 Channel Bandwidth: 40MHz	<b>Channel</b>	CH 352000 : 1760 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3520.00	-53.59	-13.00	-40.59	1.52 H	105	56.28	-109.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3520.00	-54.45	-13.00	-41.45	1.87 V	76	55.42	-109.87

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23017 : 699.7 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-58.86	-13.00	-45.86	2.54 H	153	57.75	-116.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-60.98	-13.00	-47.98	2.51 V	125	55.63	-116.61

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.22	-13.00	-46.22	1.85 H	225	57.42	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-61.29	-13.00	-48.29	2.05 V	333	55.35	-116.64

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 23173 : 715.3 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-59.31	-13.00	-46.31	1.55 H	242	57.35	-116.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-60.92	-13.00	-47.92	2.52 V	314	55.74	-116.66

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23035 : 701.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-59.16	-13.00	-46.16	2.35 H	252	57.46	-116.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-61.28	-13.00	-48.28	1.67 V	153	55.34	-116.62

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.08	-13.00	-46.08	2.57 H	163	57.56	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-61.40	-13.00	-48.40	1.52 V	256	55.24	-116.64

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 23155 : 713.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-59.12	-13.00	-46.12	1.85 H	15	57.54	-116.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-61.03	-13.00	-48.03	1.65 V	282	55.63	-116.66

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23060 : 704 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-59.39	-13.00	-46.39	2.06 H	287	57.24	-116.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-61.42	-13.00	-48.42	1.77 V	235	55.21	-116.63

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23095 : 707.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-59.08	-13.00	-46.08	1.23 H	99	57.56	-116.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.90	-13.00	-47.90	2.06 V	287	55.74	-116.64

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.





<b>RF Mode</b>	LTE Band 12 Channel Bandwidth: 10MHz	<b>Channel</b>	CH 23130 : 711 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-59.09	-13.00	-46.09	2.41 H	186	57.56	-116.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-61.41	-13.00	-48.41	1.78 V	22	55.24	-116.65

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

## 7.2.4 R n71 SCS 15 kHz+LTE Band 2

<b>RF Mode</b>	NR n71 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 133100 : 665.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-60.75	-13.00	-47.75	2.52 H	296	56.13	-116.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1331.00	-61.46	-13.00	-48.46	1.52 V	197	55.42	-116.88

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	NR n71 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 136100 : 680.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-60.42	-13.00	-47.42	2.52 H	177	56.35	-116.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-61.15	-13.00	-48.15	2.32 V	341	55.62	-116.77

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.



<b>RF Mode</b>	NR n71 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 139100 : 695.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-60.61	-13.00	-47.61	2.36 H	155	56.04	-116.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1391.00	-61.41	-13.00	-48.41	1.52 V	266	55.24	-116.65

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

<b>RF Mode</b>	NR n71 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 134600 : 673 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-60.56	-13.00	-47.56	1.35 H	205	56.27	-116.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1346.00	-61.41	-13.00	-48.41	2.87 V	155	55.42	-116.83

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	NR n71 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 136100 : 680.5 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-60.32	-13.00	-47.32	1.47 H	253	56.45	-116.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1361.00	-61.63	-13.00	-48.63	2.05 V	33	55.14	-116.77

**Remarks:**

1.  $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3.  $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.



<b>RF Mode</b>	NR n71 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 137600 : 688 MHz
<b>Frequency Range</b>	1 GHz ~ 18 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-60.25	-13.00	-47.25	2.52 H	169	56.46	-116.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1376.00	-61.00	-13.00	-48.00	3.52 V	205	55.71	-116.71

**Remarks:**

- ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
- Margin value = ERP – Limit value
- The other ERP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18607 : 1850.7 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-47.27	-13.00	-34.27	1.63 H	252	60.45	-107.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3701.40	-49.30	-13.00	-36.30	2.63 V	154	58.42	-107.72

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.





<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.56	-13.00	-34.56	1.23 H	205	60.24	-107.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.35	-13.00	-36.35	2.24 V	158	58.45	-107.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 1.4MHz	<b>Channel</b>	CH 19193 : 1909.3 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-47.59	-13.00	-34.59	2.24 H	206	60.12	-107.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3818.60	-49.30	-13.00	-36.30	1.52 V	27	58.41	-107.71

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 18625 : 1852.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-49.43	-13.00	-36.43	2.58 H	87	58.29	-107.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3705.00	-47.59	-13.00	-34.59	1.74 V	196	60.13	-107.72

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.27	-13.00	-34.27	1.57 H	199	60.53	-107.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.51	-13.00	-36.51	2.65 V	266	58.29	-107.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 5MHz	<b>Channel</b>	CH 19175 : 1907.5 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-47.49	-13.00	-34.49	1.57 H	163	60.24	-107.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3815.00	-49.27	-13.00	-36.27	2.06 V	221	58.46	-107.73

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 18700 : 1860 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-47.53	-13.00	-34.53	2.51 H	189	60.23	-107.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3720.00	-49.02	-13.00	-36.02	1.52 V	22	58.74	-107.76

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-49.38	-13.00	-36.38	2.06 H	157	58.42	-107.80
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-47.55	-13.00	-34.55	1.65 V	208	60.25	-107.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

<b>RF Mode</b>	LTE Band 2 Channel Bandwidth: 20MHz	<b>Channel</b>	CH 19100 : 1900 MHz
<b>Frequency Range</b>	1 GHz ~ 20 GHz	<b>Detector Function &amp; Bandwidth</b>	1 MHz/3 MHz (RMS)
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 70% RH
<b>Tested By</b>	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-47.54	-13.00	-34.54	2.36 H	104	60.25	-107.79
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3800.00	-49.44	-13.00	-36.44	1.25 V	224	58.35	-107.79

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---