



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	4F, No.9, Park Avenue II, Science-based Industrial Park Hsinchu 300, Taiwan
FCC ID	RAXWA8001AAC
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	4F, No.9, Park Avenue II, Science-based Industrial Park Hsinchu 300, Taiwan

Product Name	Wireless Joey Access Point
Brand Name	EchoStar
Model No.	Wireless Joey Access Point
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Dec. 10, 2013
Final Test Date	Feb. 22, 2014
Submission Type	Class II Change
Operating Mode	Master and Client (without radar detection function)

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5250 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Class II Change .....	10
3.8. Table for Supporting Units .....	10
3.9. Table for Parameters of Test Software Setting .....	12
3.10. EUT Operation during Test .....	12
3.11. Duty Cycle.....	13
3.12. Test Configurations .....	15
<b>4. TEST RESULT .....</b>	<b>18</b>
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	22
4.3. Maximum Conducted Output Power Measurement.....	35
4.4. Power Spectral Density Measurement .....	38
4.5. Peak Excursion Measurement.....	46
4.6. Radiated Emissions Measurement .....	54
4.7. Band Edge Emissions Measurement .....	80
4.8. Frequency Stability Measurement .....	89
4.9. Antenna Requirements .....	91
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>92</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>94</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A12</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. 20DB BANDWIDTH REPORT.....</b>	<b>D1 ~ D5</b>



### History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3D1013-01	Rev. 01	Initial issue of report	Mar. 07, 2014
FR3D1013-01	Rev. 02	Revised the Appendix A. Photographs of EUT	Mar. 13, 2014



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Joey Access Point  
Brand Name : EchoStar  
Model No. : Wireless Joey Access Point  
Applicant : Arcadyan Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 10, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.64 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.03 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.11 dB
4.5	15.407(a)	Peak Excursion	Complies	2.44 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.04 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12 for 20MHz bandwidth ; 5 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 2: 802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz Band 3: 802.11ac MCS0/Nss1 (VHT20): 17.92 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz
Maximum Conducted Output Power	Band 2: 802.11ac MCS0/Nss1 (VHT20): 20.41 dBm ; 802.11ac MCS0/Nss1 (VHT40): 20.46 dBm ; 802.11ac MCS0/Nss1 (VHT80): 13.31 dBm Band 3: 802.11ac MCS0/Nss1 (VHT20): 20.50 dBm ; 802.11ac MCS0/Nss1 (VHT40): 20.47 dBm ; 802.11ac MCS0/Nss1 (VHT80): 16.51 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12
Channel Band Width (99%)	Band 2: 17.80 MHz ; Band 3: 17.12 MHz
Maximum Conducted Output Power	Band 2: 22.97 dBm ; Band 3: 22.69 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input type="checkbox"/> With TPC	<input checked="" type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input type="checkbox"/> With 5600~5650MHz	<input checked="" type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming

Note : The product has beamforming function for 802.11n/ac mode only.

**Antenna and Band width**

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

Note : The product has beamforming function for 802.11n/ac mode only.

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

Power	Brand	Model No.	Rating
Adapter	DELTA	ADP-18DW BA	Input: 100-120Vac, 0.5A, 60Hz Output: 12Vdc, 1.46A
<b>Other</b>			
RJ-45 Cable*1: Non-shielded, 3m			




### 3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)
1	Airgain	N5x20B	PCB Antenna	I-PEX	1.7
2	Airgain	N5x20B	PCB Antenna	I-PEX	1.7
3	Airgain	N5x20B	PCB Antenna	I-PEX	1.7

Note: The EUT has three antennas. (3TX/3RX)

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

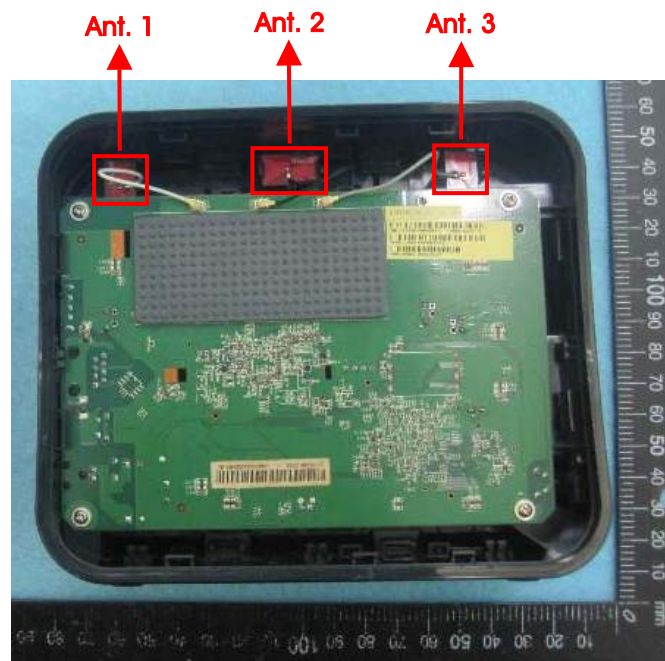

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 134.

For 80MHz bandwidth systems, use Channel 58, 106.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	112	5560 MHz
	102	5510 MHz	116	5580 MHz
	104	5520 MHz	132	5660 MHz
	106	5530 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3
Power Spectral Density	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3
Peak Excursion	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3

Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3
Band Edge Emission	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/ 116/140	1+2+3
Frequency Stability	Un-modulation		-	60/100	1+2+3

Note

- VHT20/VHT40 covers HT20 & HT40, due to same modulation.
- There are two modes of EUT for 802.11n/ac, one is beamforming mode and the other is non-beamforming mode for 802.11n/ac. After evaluating, beamforming mode had been evaluated to be the worst case, so it was selected to record in this test report.
- The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. AP function

Mode 2. Client function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emissions Below 1GHz test:**

Mode 1. AP function

Mode 2. Client function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emissions Above 1GHz test:**

Mode 1. CTX

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 3D1013

Below is the table for the change of the product with respect to the original one.

Description	Performance Checking
Add Band 2 and Band 3	All Item test

### 3.8. Table for Supporting Units

For AC Power Line Conducted Emissions test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Wireless Joey Access Point	EchoStar	Wireless Joey Access Point	RAXWA8001AAC
Notebook	DELL	E6430	DoC
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A

For Radiated Emissions Below 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Wireless Joey Access Point	EchoStar	Wireless Joey Access Point	RAXWA8001AAC
Notebook	DELL	D420	DoC
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A

**For Others test:**

For IEEE 802.11a: Non-beamforming mode

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	DoC

For IEEE 802.11ac: Beamforming mode

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	DoC
Notebook	DELL	D420	DoC
WiFi USB Adapter	NETGEAR	A6200	PY312200200

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0/Nss1 VHT20	62	42	52	58	64	64

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0/Nss1 VHT40	58	42	48	62	62

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS	
Frequency	5290 MHz	5530 MHz
MCS0/Nss1 VHT80	34	46

#### Power Parameters of IEEE 802.11a

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
802.11a	70	40	56	60	74	70

### 3.10. EUT Operation during Test

#### For IEEE 802.11a: Non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

#### For IEEE 802.11ac: Beamforming mode

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:


During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WiFi USB Adapter and transmit duty cycle no less 98%


### 3.11. Duty Cycle

#### IEEE 802.11ac MCS0/Nss1 VHT20

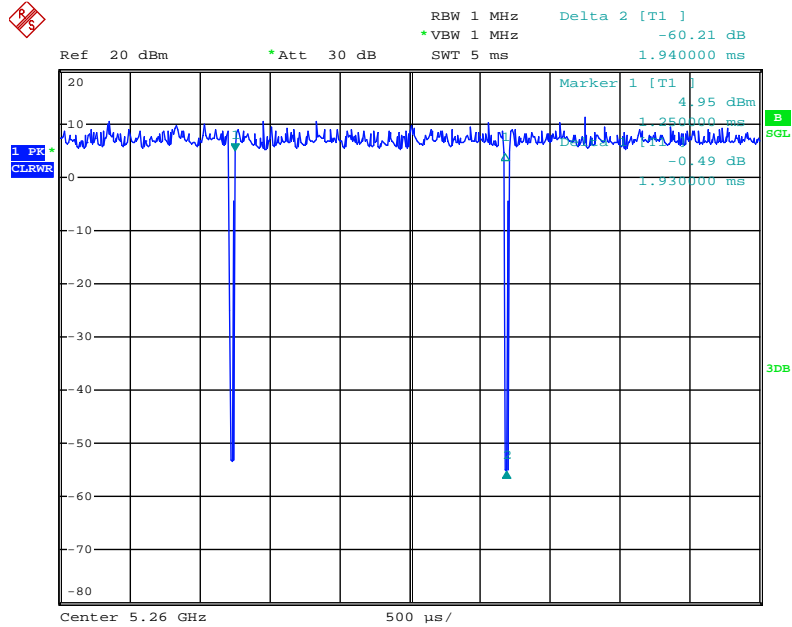

Date: 20.FEB.2014 00:09:33


#### IEEE 802.11ac MCS0/Nss1 VHT40

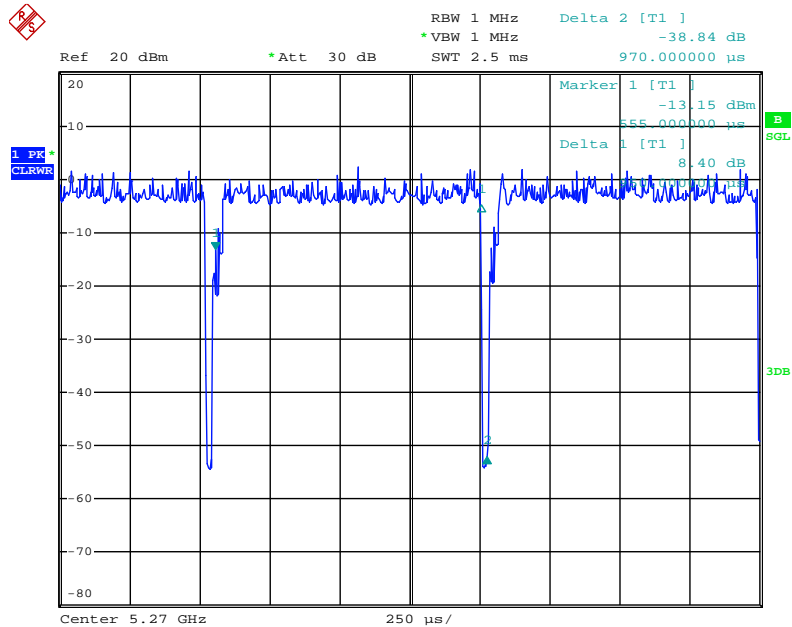

Date: 20.FEB.2014 00:11:16




IEEE 802.11ac MCS0/Nss1 VHT80

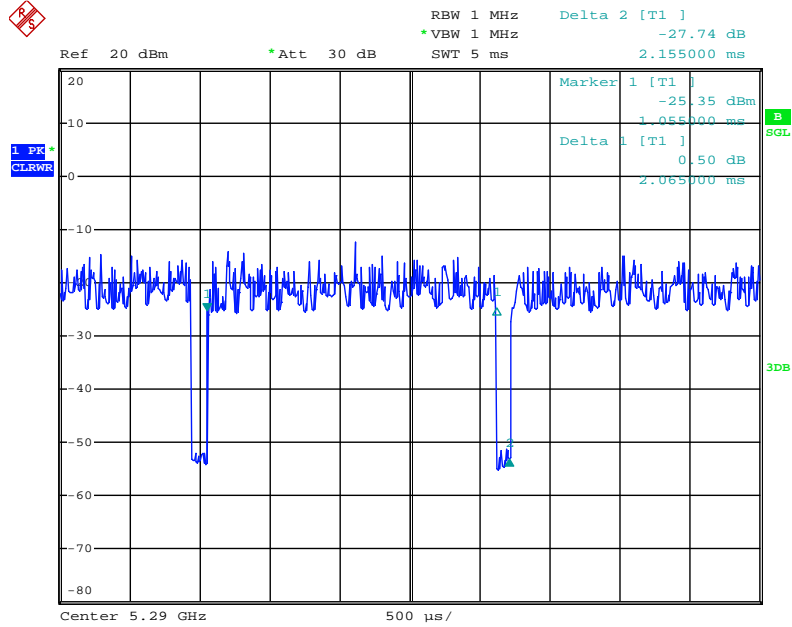

Date: 20.FEB.2014 00:13:07


IEEE 802.11a

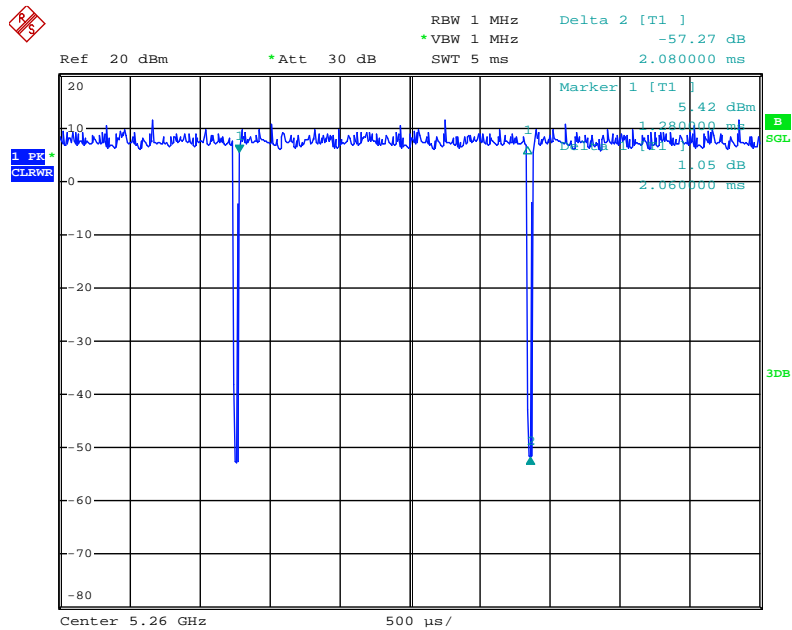

Date: 20.FEB.2014 00:07:18

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration

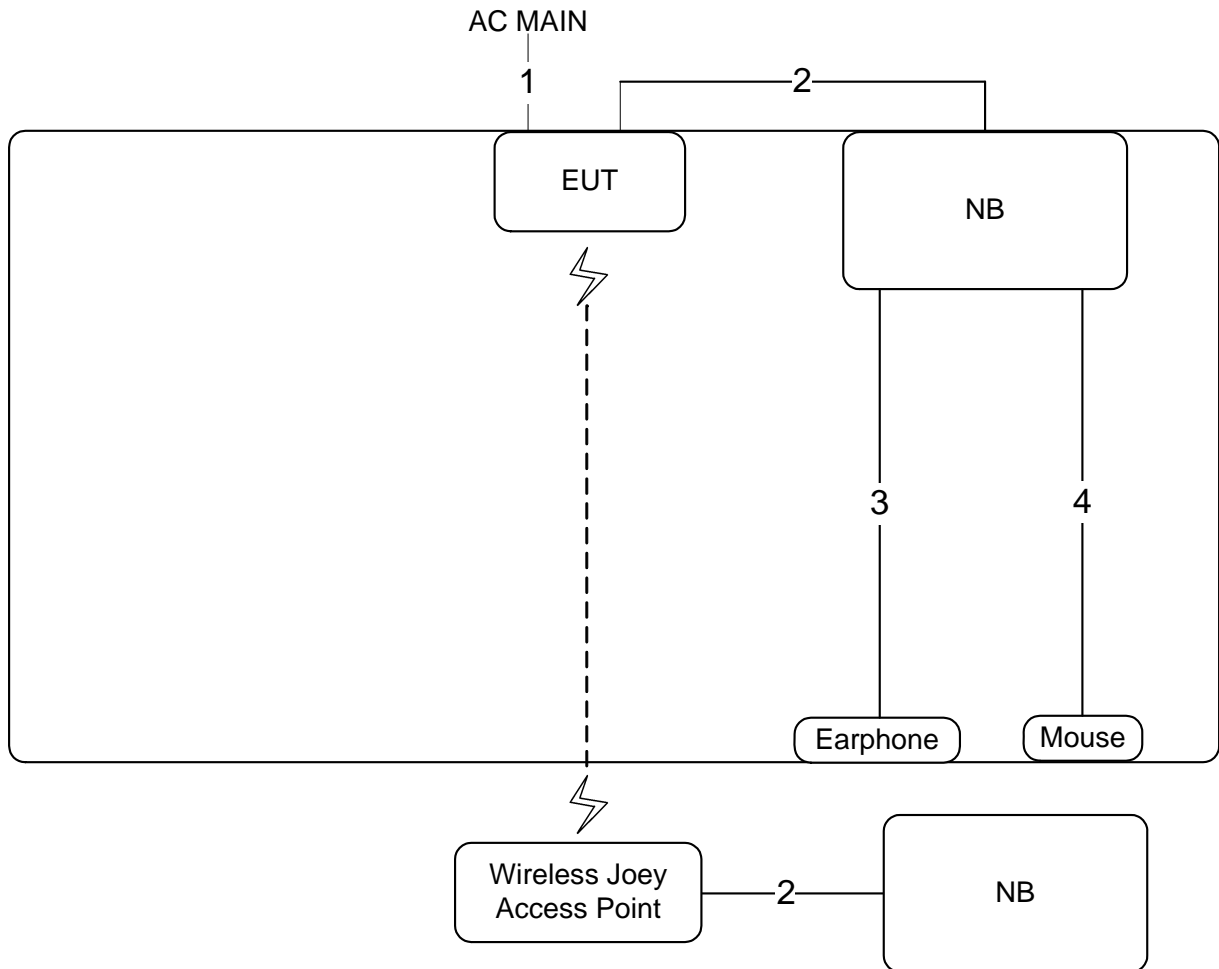

Item	Connection	Shield	Length
1	Power Cable	No	1.4m
2	RJ-45 Cable	No	3m
3	Audio Cable	No	1.1m
4	USB Cable	No	1.8m


### 3.12.2. Radiation Emissions above 1GHz Test Configuration

For IEEE 802.11a: Non-beamforming mode

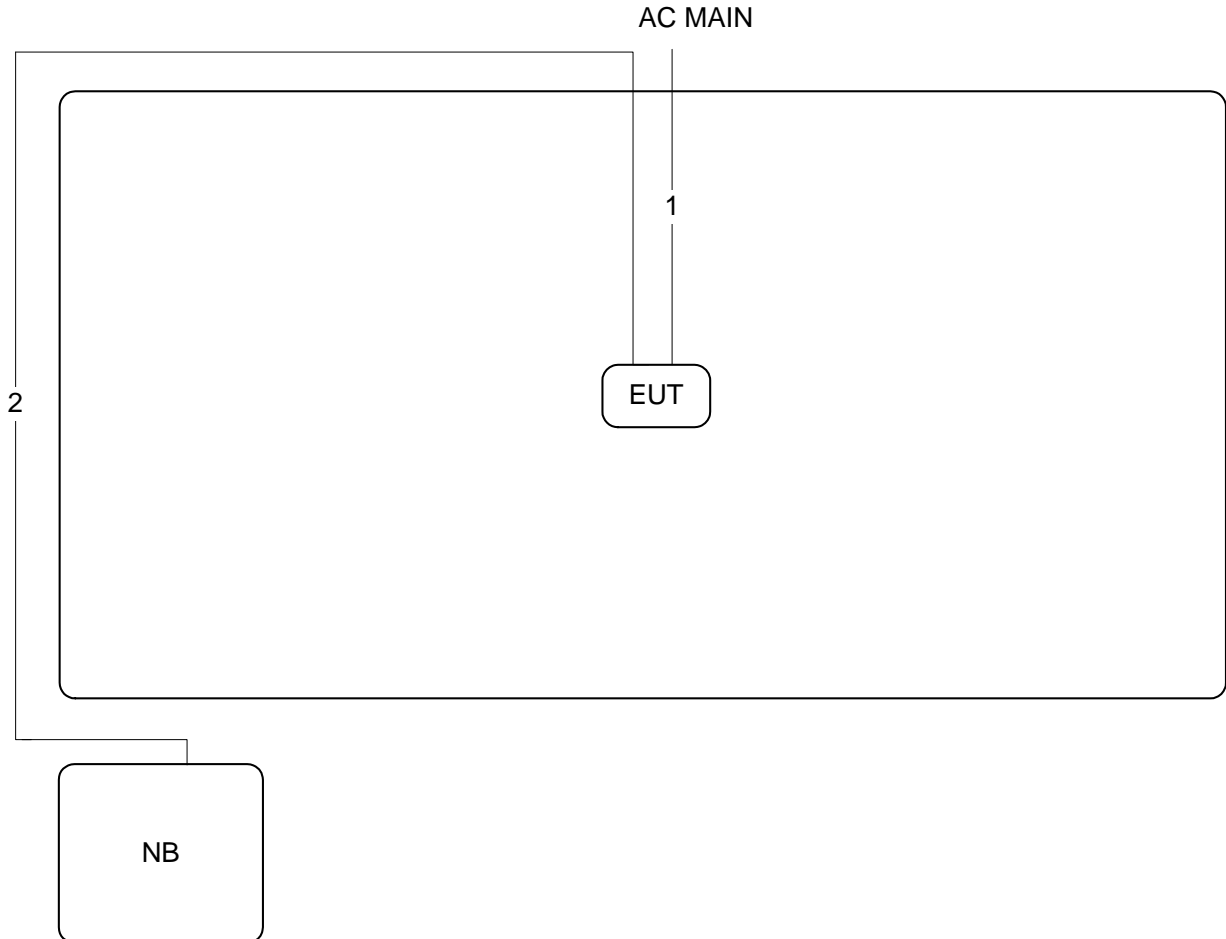

Item	Connection	Shield	Length
1	Power Cable	No	1.4m
2	RJ-45 Cable	No	10m

For IEEE 802.11ac: Beamforming mode

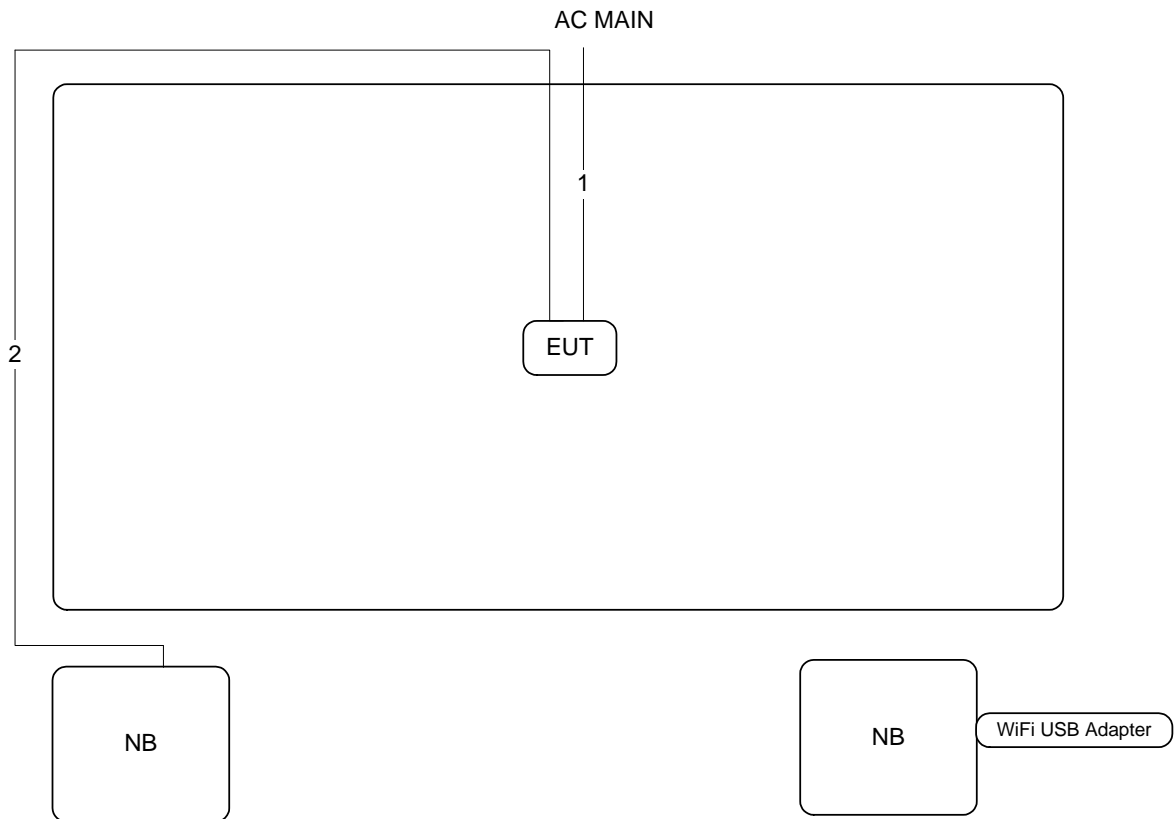

Item	Connection	Shield	Length
1	Power Cable	No	1.4m
2	RJ-45 Cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

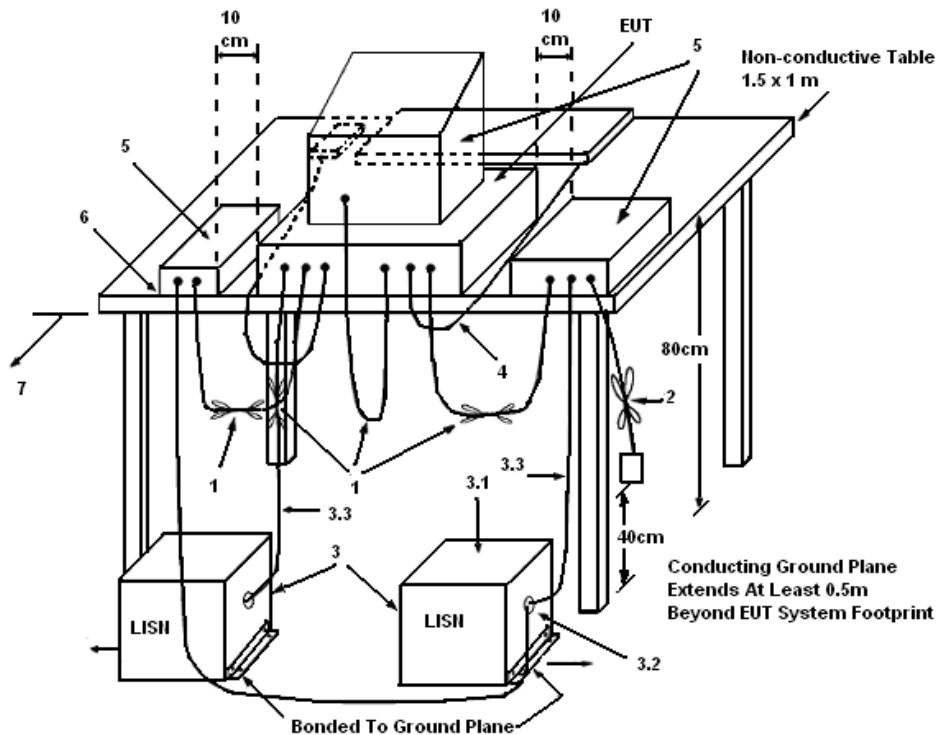

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	53%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

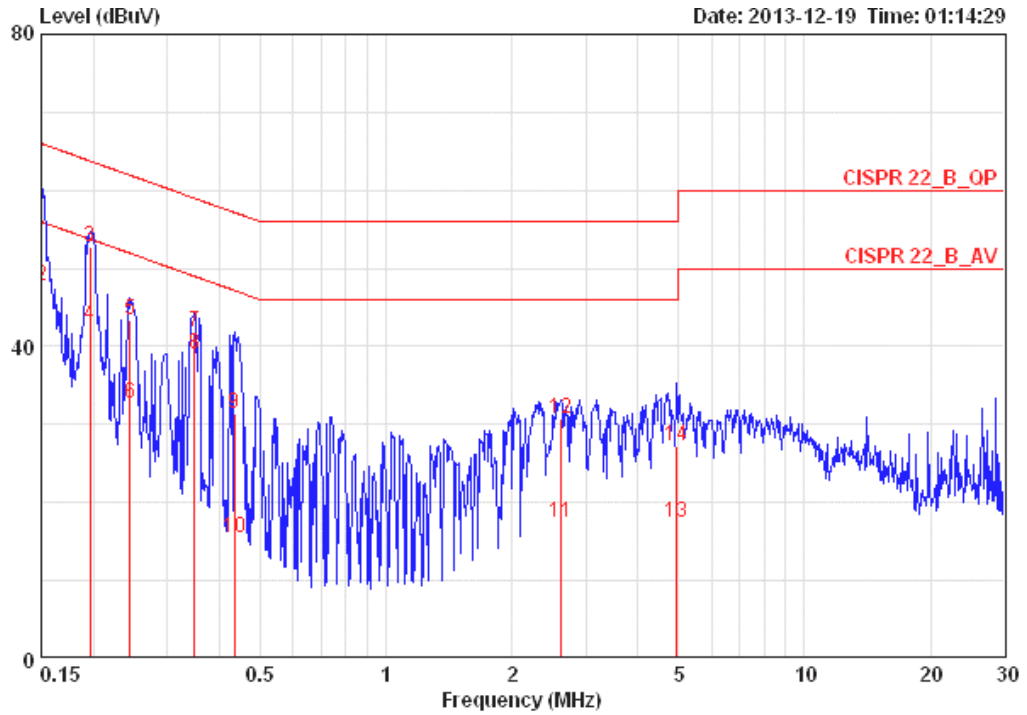

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	58.36	-7.64	66.00	58.03	0.15	0.18	LINE	QP
2	0.15000	47.76	-8.24	56.00	47.43	0.15	0.18	LINE	AVERAGE
3	0.19654	52.73	-11.03	63.76	52.38	0.15	0.20	LINE	QP
4	0.19654	42.76	-11.00	53.76	42.41	0.15	0.20	LINE	AVERAGE
5	0.24422	43.36	-18.59	61.95	43.01	0.15	0.20	LINE	QP
6	0.24422	32.62	-19.33	51.95	32.27	0.15	0.20	LINE	AVERAGE
7	0.34830	41.85	-17.15	59.00	41.50	0.15	0.20	LINE	QP
8	0.34830	38.95	-10.05	49.00	38.60	0.15	0.20	LINE	AVERAGE
9	0.43511	31.42	-25.73	57.15	31.07	0.15	0.20	LINE	QP
10	0.43511	15.57	-31.58	47.15	15.22	0.15	0.20	LINE	AVERAGE
11	2.608	17.37	-28.63	46.00	16.91	0.22	0.24	LINE	AVERAGE
12	2.608	30.73	-25.27	56.00	30.27	0.22	0.24	LINE	QP
13	4.952	17.54	-28.46	46.00	16.93	0.29	0.32	LINE	AVERAGE
14	4.952	27.29	-28.71	56.00	26.68	0.29	0.32	LINE	QP

Temperature	24°C	Humidity	53%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

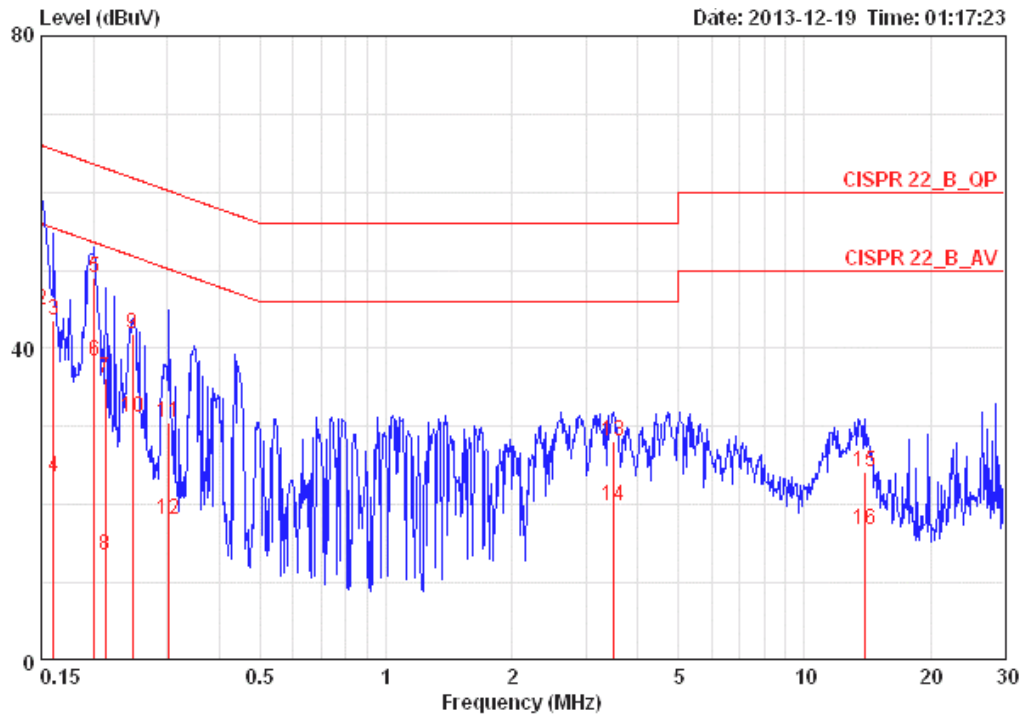

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBµV	dB	dBµV	dBµV	dB	dB		
1	0.15000	56.84	-9.16	66.00	56.59	0.07	0.18	NEUTRAL	QP
2	0.15000	44.93	-11.07	56.00	44.68	0.07	0.18	NEUTRAL	AVERAGE
3	0.16070	43.51	-21.91	65.43	43.26	0.07	0.18	NEUTRAL	QP
4	0.16070	23.53	-31.89	55.43	23.28	0.07	0.18	NEUTRAL	AVERAGE
5	0.20075	49.03	-14.55	63.58	48.76	0.07	0.20	NEUTRAL	QP
6	0.20075	38.38	-15.20	53.58	38.11	0.07	0.20	NEUTRAL	AVERAGE
7	0.21392	36.11	-26.94	63.05	35.84	0.07	0.20	NEUTRAL	QP
8	0.21392	13.44	-39.61	53.05	13.17	0.07	0.20	NEUTRAL	AVERAGE
9	0.24814	41.77	-20.05	61.82	41.50	0.07	0.20	NEUTRAL	QP
10	0.24814	31.18	-20.64	51.82	30.91	0.07	0.20	NEUTRAL	AVERAGE
11	0.30348	30.60	-29.55	60.15	30.33	0.07	0.20	NEUTRAL	QP
12	0.30348	18.18	-31.97	50.15	17.91	0.07	0.20	NEUTRAL	AVERAGE
13	3.491	28.20	-27.80	56.00	27.80	0.12	0.28	NEUTRAL	QP
14	3.491	19.91	-26.09	46.00	19.51	0.12	0.28	NEUTRAL	AVERAGE
15	13.915	24.25	-35.75	60.00	23.51	0.34	0.40	NEUTRAL	QP
16	13.915	16.78	-33.22	50.00	16.04	0.34	0.40	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.



## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	20.48	18.08
60	5300 MHz	20.32	17.92
64	5320 MHz	20.48	17.92
100	5500 MHz	20.32	17.92
116	5580 MHz	20.48	17.76
140	5700 MHz	20.16	17.44

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	39.04	36.48
62	5310 MHz	39.04	36.48
102	5510 MHz	39.04	36.48
110	5550 MHz	39.04	36.48
134	5670 MHz	39.04	36.48

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	81.28	76.16
106	5530 MHz	81.92	76.80

<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	20.32	17.12
60	5300 MHz	20.16	17.28
64	5320 MHz	20.16	17.28
100	5500 MHz	20.00	17.12
116	5580 MHz	19.84	17.12
140	5700 MHz	20.16	17.12

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz**

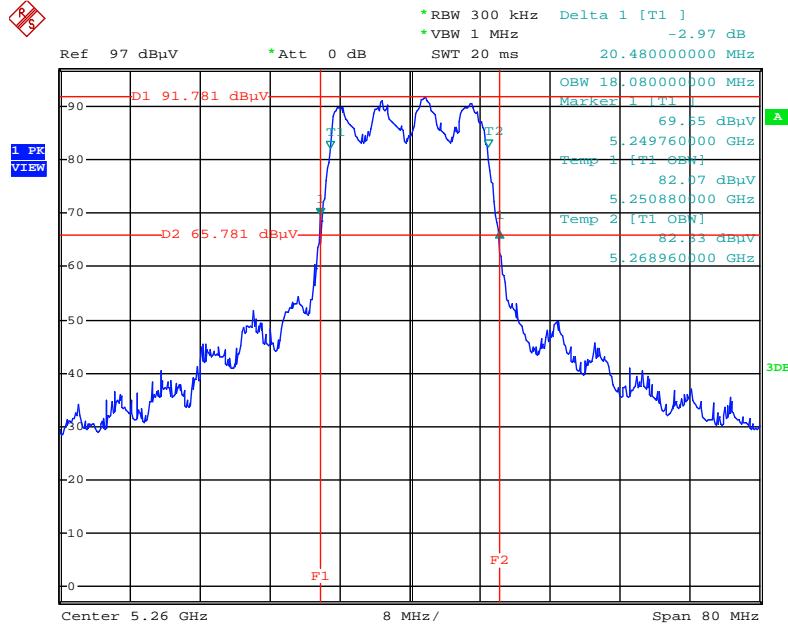


Date: 19.FEB.2014 22:52:53

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz**

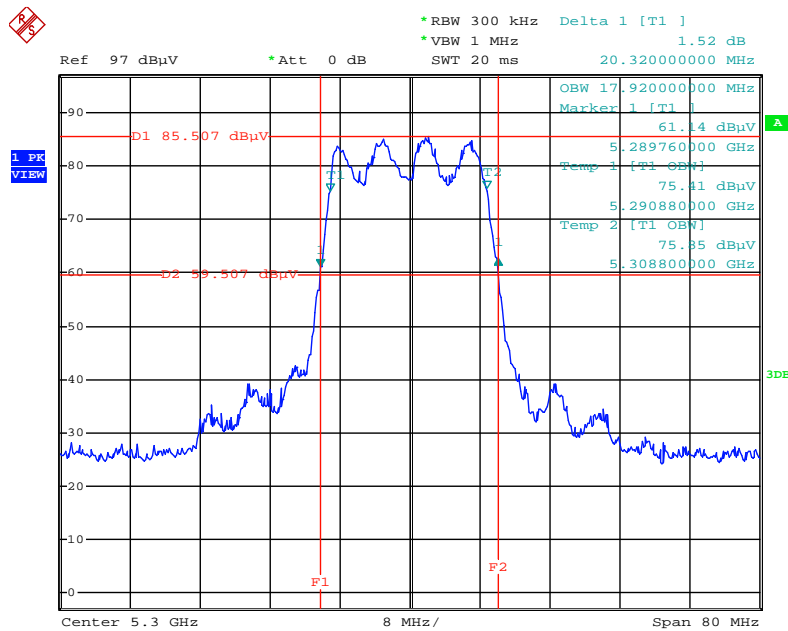


Date: 19.FEB.2014 22:53:29

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz**

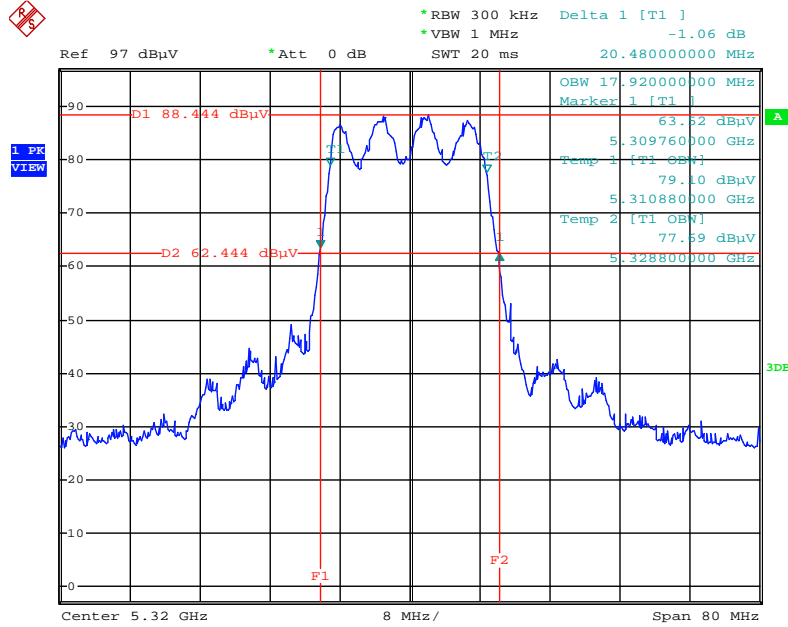


Date: 19.FEB.2014 22:53:58

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz**

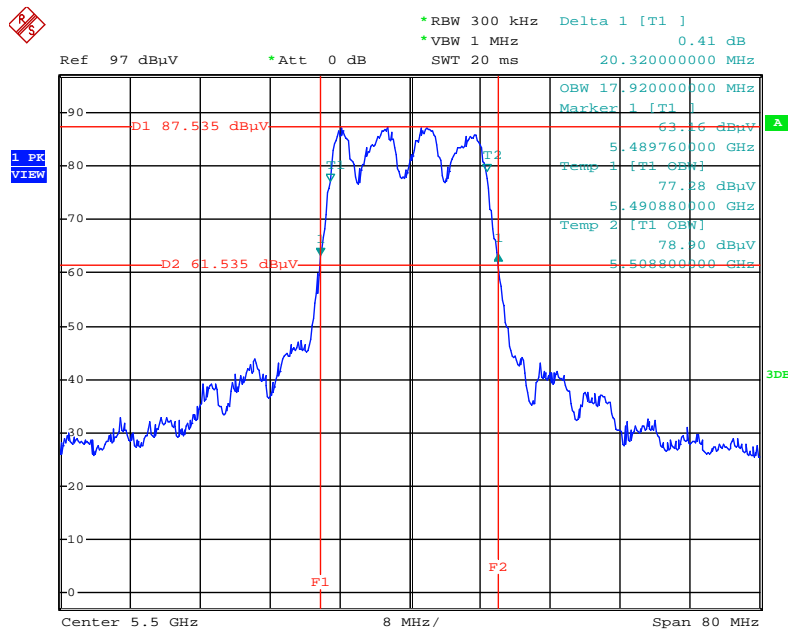


Date: 19.FEB.2014 22:56:07

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz**

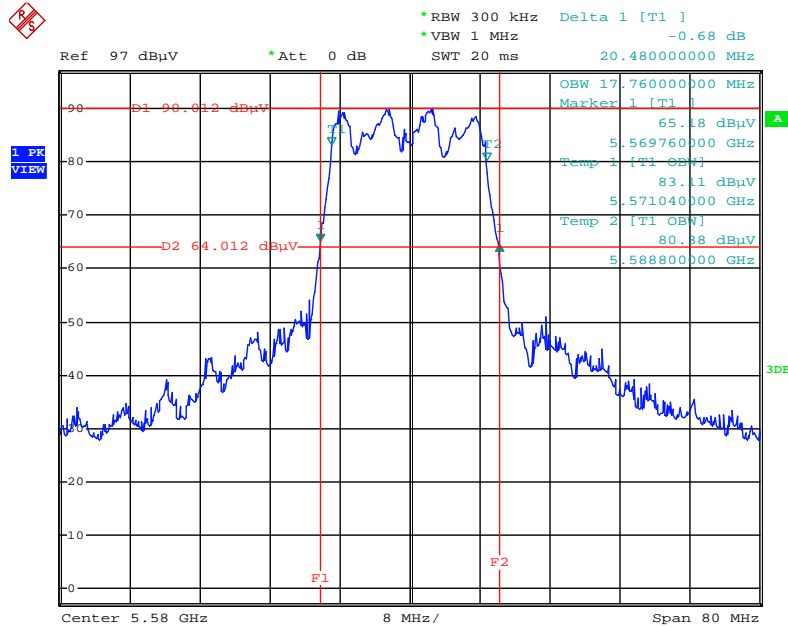


Date: 19.FEB.2014 22:55:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz**

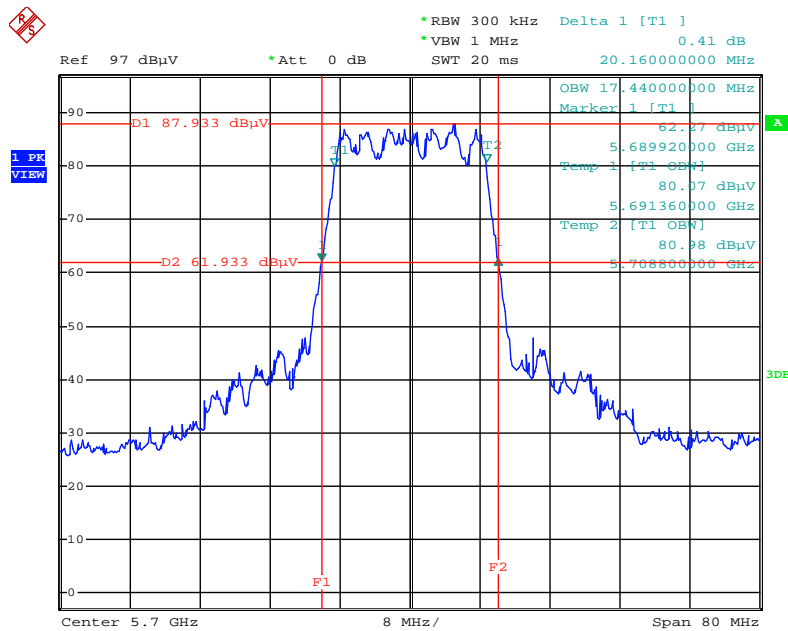


Date: 19.FEB.2014 22:56:45

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz**

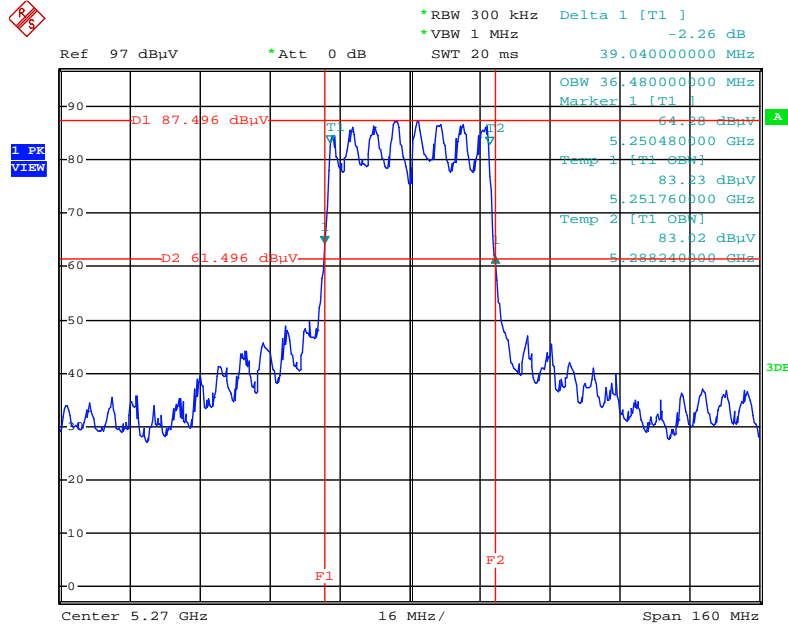


Date: 19.FEB.2014 22:57:56

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz**

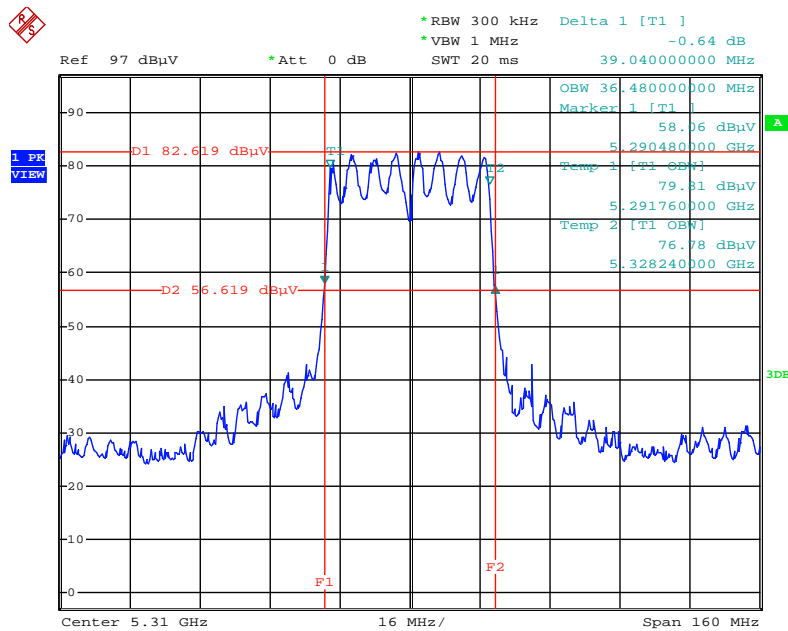


Date: 19.FEB.2014 22:58:38

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz**

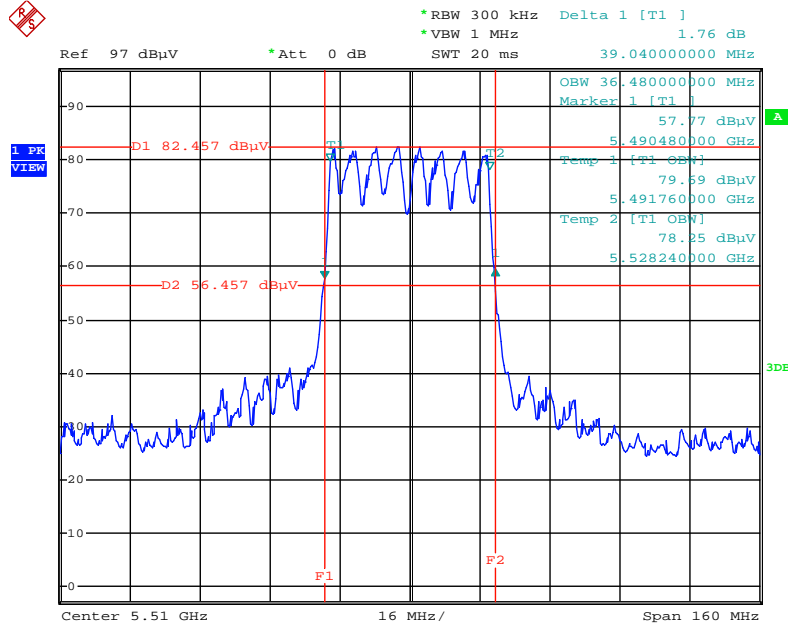

Date: 19.FEB.2014 23:00:41


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz**

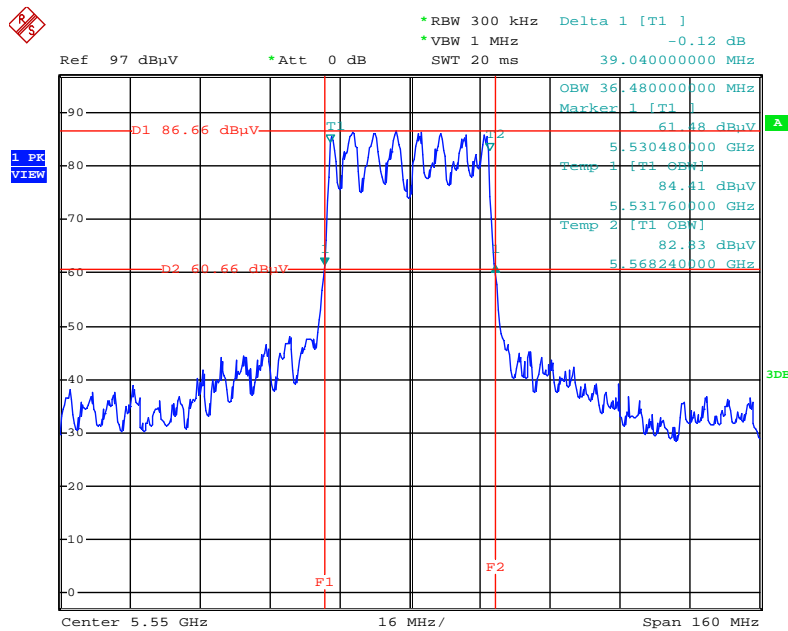

Date: 19.FEB.2014 23:00:15




**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz**

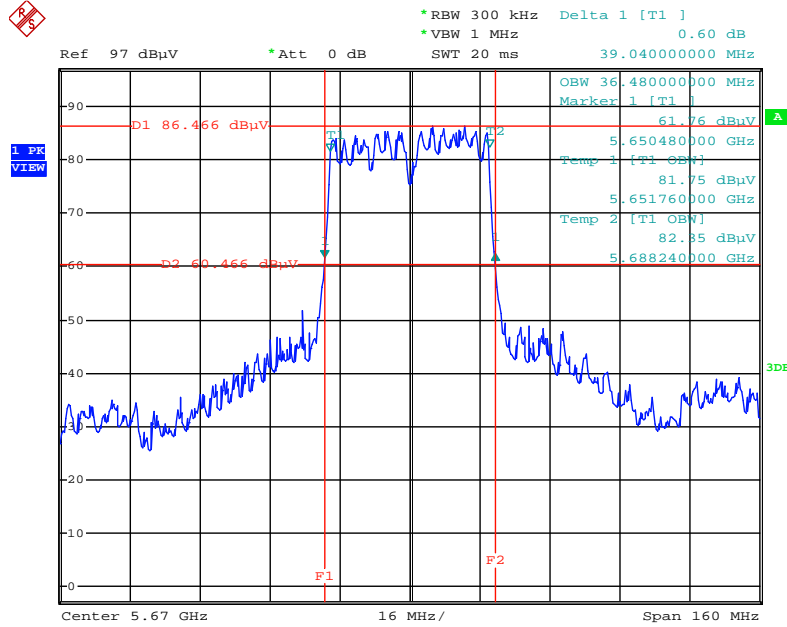


Date: 19.FEB.2014 23:01:28

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz**

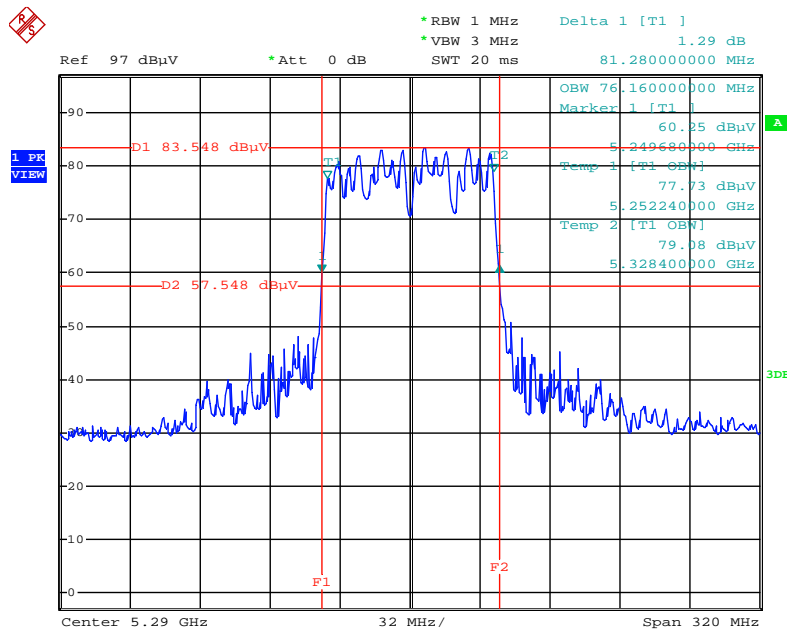


Date: 19.FEB.2014 23:03:26

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz**

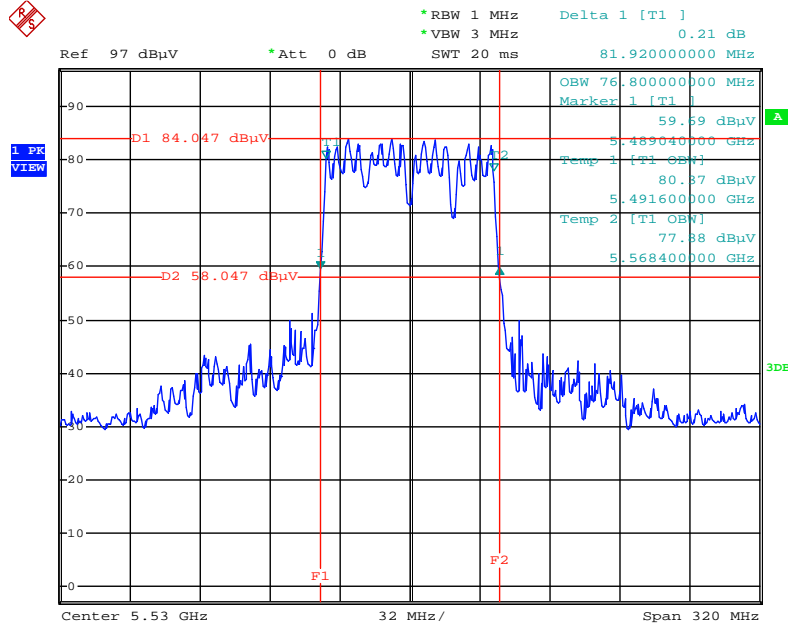


Date: 19.FEB.2014 23:03:01

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz**

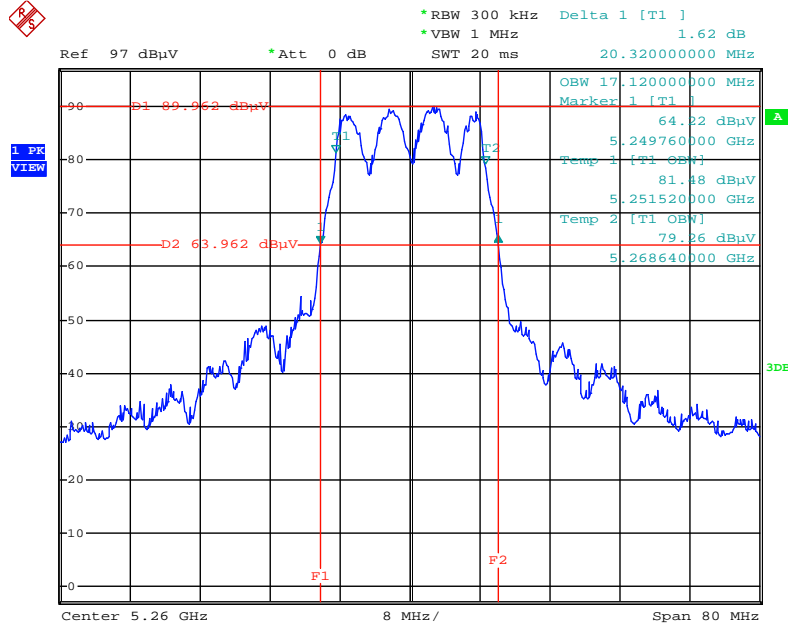


Date: 19.FEB.2014 22:46:26

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz**

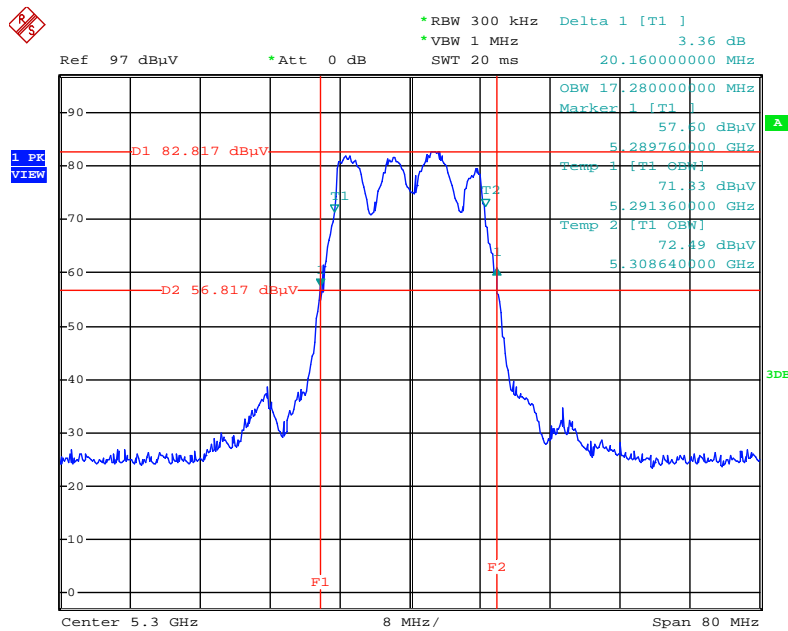


Date: 19.FEB.2014 22:47:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz**

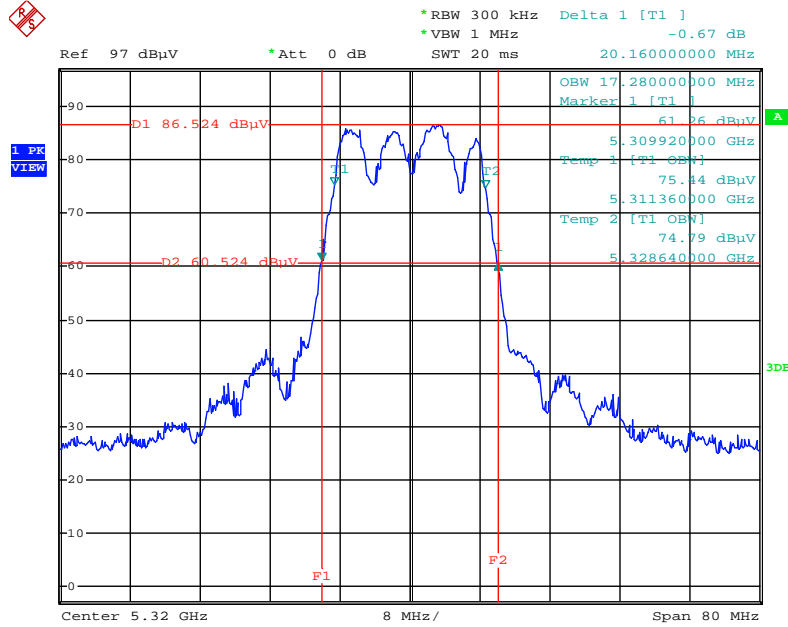


Date: 19.FEB.2014 22:48:20

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz**

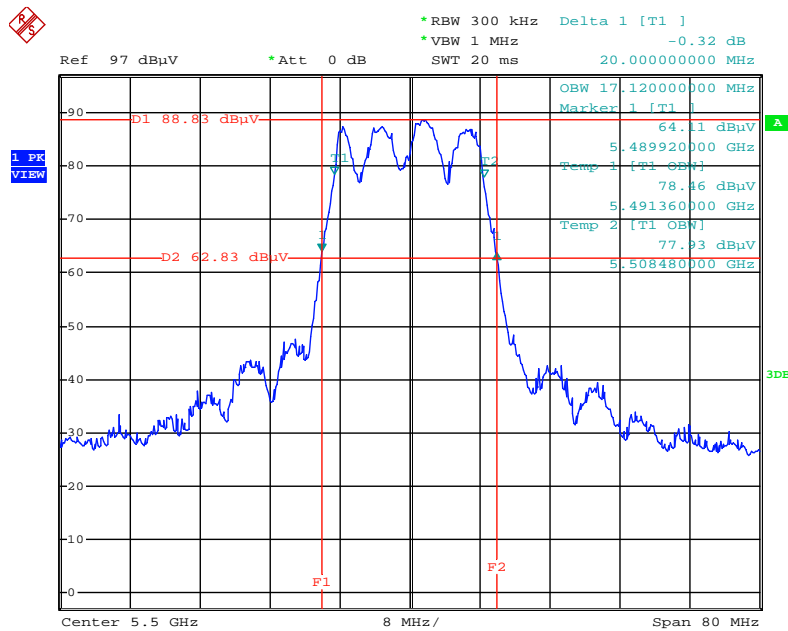


Date: 19.FEB.2014 22:50:23

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz**

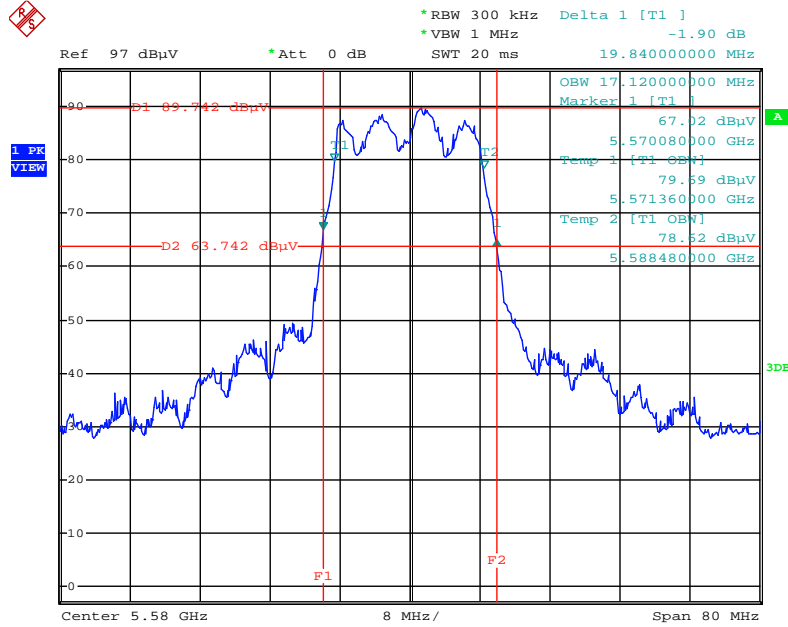

Date: 19.FEB.2014 22:50:55

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz**

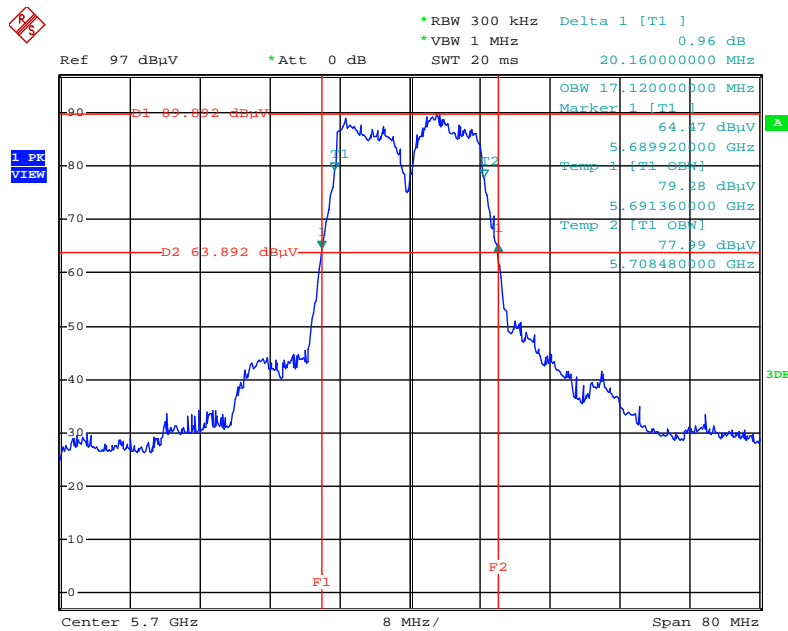

Date: 19.FEB.2014 23:14:12

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or  $11 \text{ dBm} + 10\log B$ , where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power => (3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac
Test Date	Feb. 19, 2014		

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
52	5260 MHz	15.34	16.43	15.03	20.41	23.53	Complies
60	5300 MHz	10.41	12.05	10.71	15.89	23.53	Complies
64	5320 MHz	13.01	14.46	13.29	18.40	23.53	Complies
100	5500 MHz	14.71	14.41	14.97	19.47	23.53	Complies
116	5580 MHz	15.82	15.31	15.78	20.41	23.53	Complies
140	5700 MHz	16.00	15.33	15.84	20.50	23.53	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 6.47\text{dBi} > 6\text{dBi}$ , so Power Limit =  $24 - (6.47 - 6) = 23.53\text{dBm}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
54	5270 MHz	15.22	16.32	15.44	20.46	23.53	Complies
62	5310 MHz	10.82	12.41	11.22	16.31	23.53	Complies
102	5510 MHz	12.54	12.37	12.87	17.37	23.53	Complies
110	5550 MHz	15.77	15.01	16.12	20.43	23.53	Complies
134	5670 MHz	15.72	15.22	16.10	20.47	23.53	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 6.47\text{dBi} > 6\text{dBi}$ , so Power Limit =  $24 - (6.47 - 6) = 23.53\text{dBm}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
58	5290 MHz	8.04	9.34	8.11	13.31	23.53	Complies
106	5530 MHz	11.42	11.62	12.15	16.51	23.53	Complies

Note:  $Directional\ gain = G_{ANT} + 10\ log(N_{ANT}/N_{SS}) = 6.47\text{dBi} > 6\text{dBi}$ , so Power Limit =  $24 - (6.47 - 6) = 23.53\text{dBm}$

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11a
Test Date	Feb. 19, 2014		

**Configuration IEEE 802.11a**

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
52	5260 MHz	17.92	18.72	17.92	22.97	24.00	Complies
60	5300 MHz	9.87	11.42	10.42	15.39	24.00	Complies
64	5320 MHz	13.98	15.18	14.44	19.33	24.00	Complies
100	5500 MHz	15.09	14.77	15.41	19.87	24.00	Complies
116	5580 MHz	17.18	17.97	18.51	22.69	23.98	Complies
140	5700 MHz	17.68	17.22	17.76	22.33	24.00	Complies

Note: CH116 Power Limit=11+10log(B) or 24 dBm;11+10log(19.84)=23.98dBm<24dBm, so 5580MHz power Limit=23.98dBm



## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.25-5.35 GHz	11
5.470-5.725 GHz	11

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

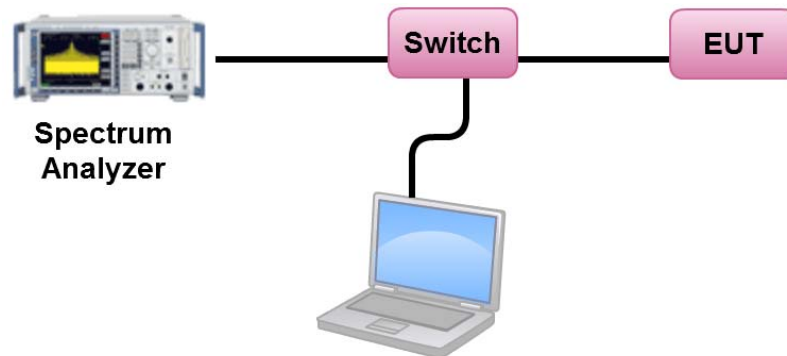

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac
Test Date	Feb. 19, 2014		

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	9.56	10.53	Complies
60	5300 MHz	2.87	10.53	Complies
64	5320 MHz	5.37	10.53	Complies
100	5500 MHz	6.51	10.53	Complies
116	5580 MHz	10.03	10.53	Complies
140	5700 MHz	7.96	10.53	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band2 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band3 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	4.98	10.53	Complies
62	5310 MHz	0.09	10.53	Complies
102	5510 MHz	1.08	10.53	Complies
110	5550 MHz	6.53	10.53	Complies
134	5670 MHz	7.23	10.53	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band2 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band3 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	-7.48	10.53	Complies
106	5530 MHz	-3.35	10.53	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band2 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$ , So Band3 Limit =  $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11a
Test Date	Feb. 19, 2014		

**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**



Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	10.39	10.53	Complies
60	5300 MHz	2.71	10.53	Complies
64	5320 MHz	6.63	10.53	Complies
100	5500 MHz	7.26	10.53	Complies
116	5580 MHz	10.42	10.53	Complies
140	5700 MHz	9.18	10.53	Complies

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 6.47 \text{ dBi} > 6 \text{ dBi}$ , So Band2 Limit =  $11 - (6.47 - 6) = 10.53 \text{ dBm/MHz}$


Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 6.47 \text{ dBi} > 6 \text{ dBi}$ , So Band3 Limit =  $11 - (6.47 - 6) = 10.53 \text{ dBm/MHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

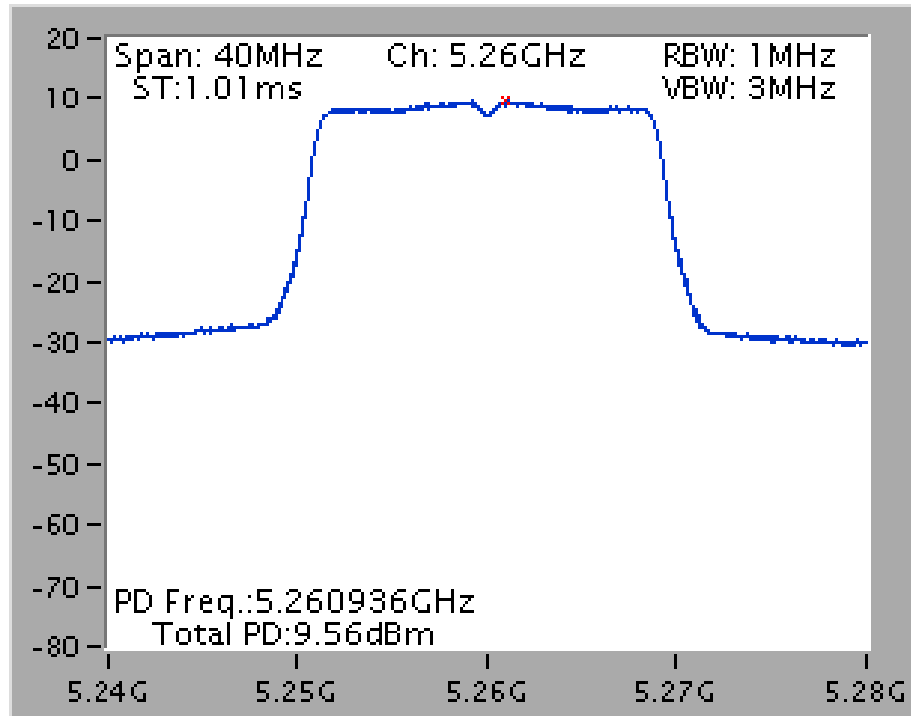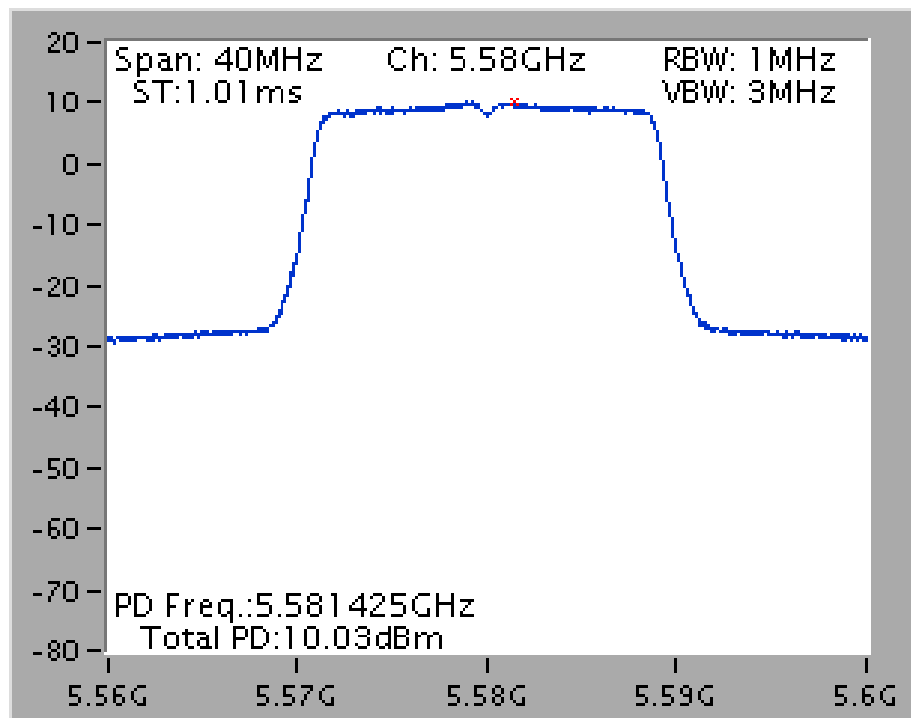**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz****Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz**


## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

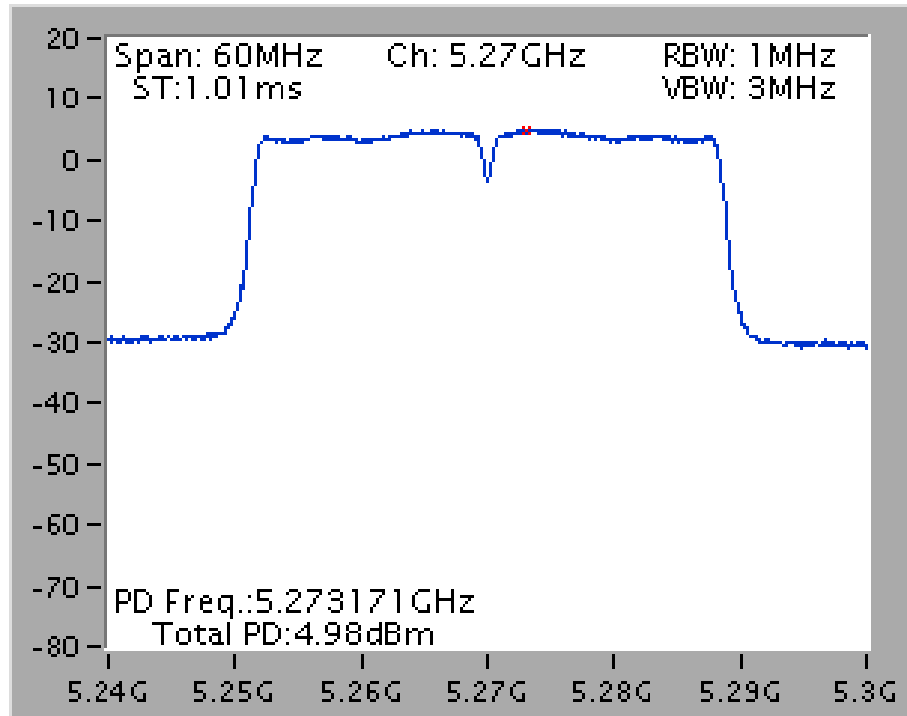


## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

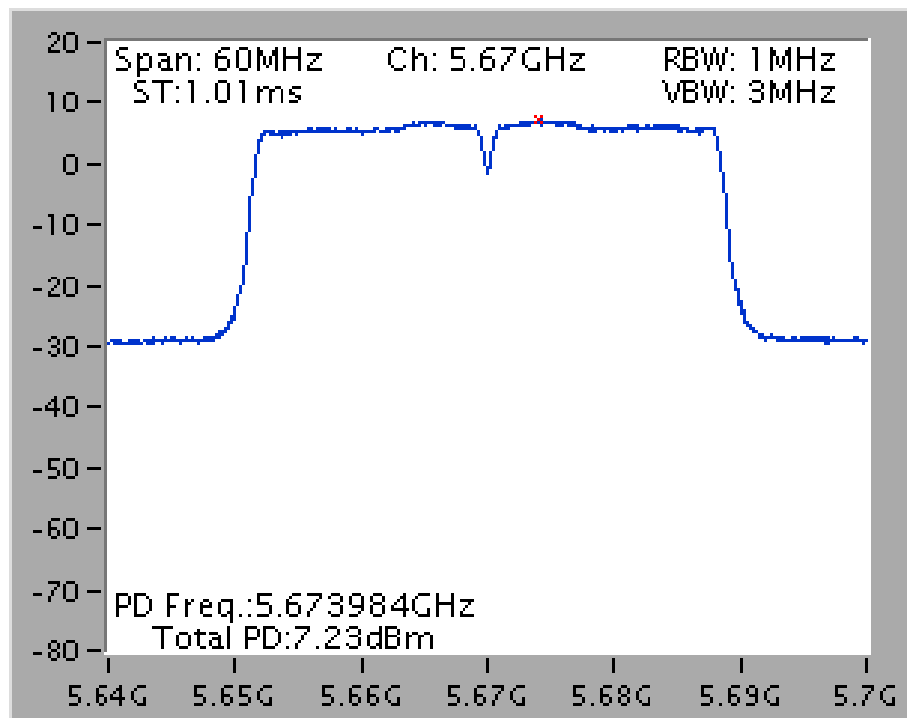


## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

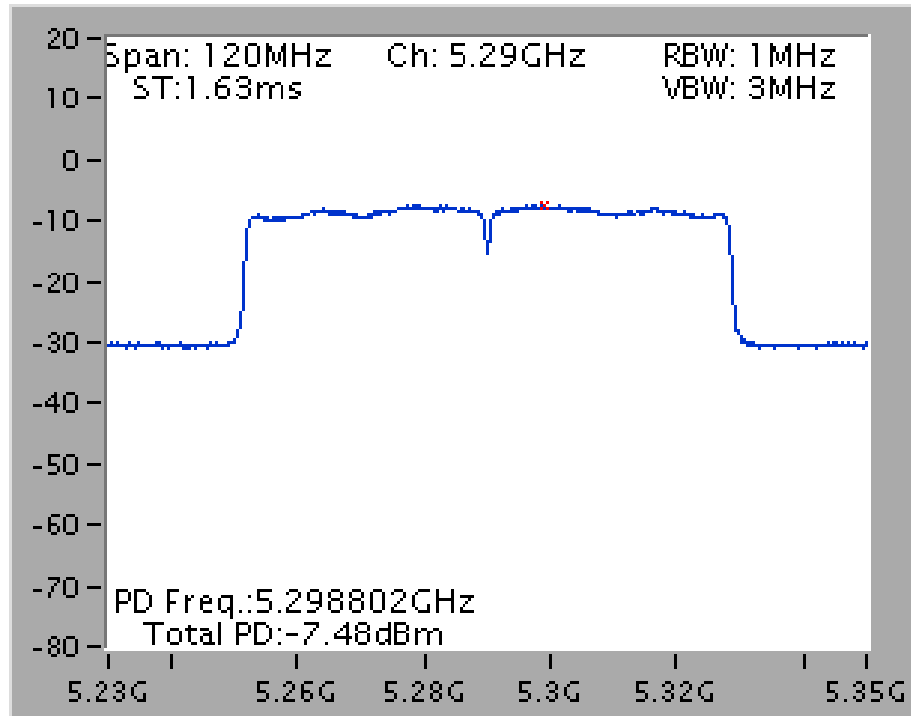


## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz

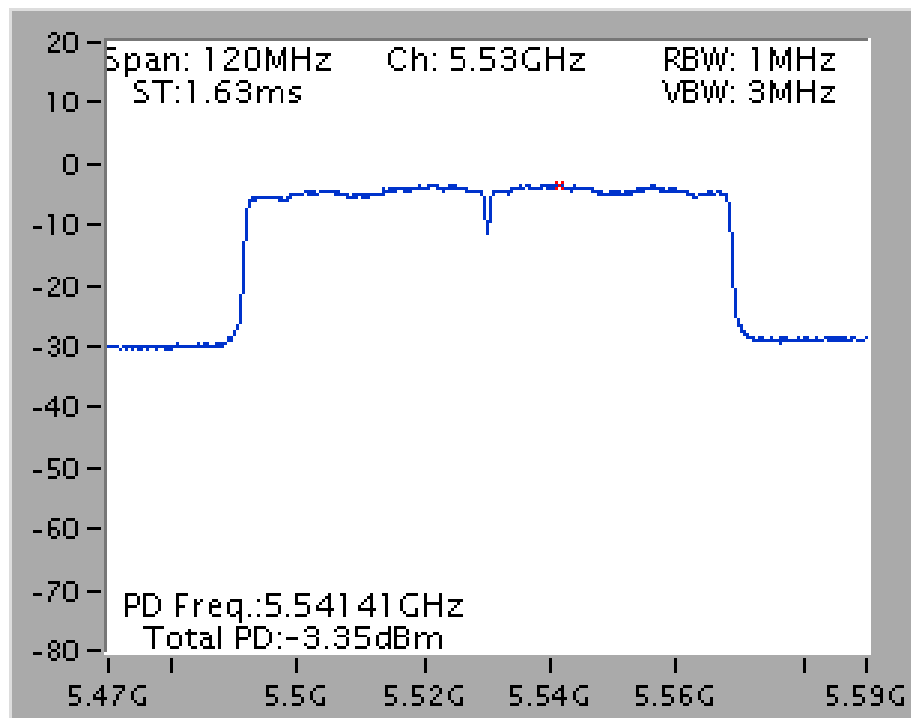

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

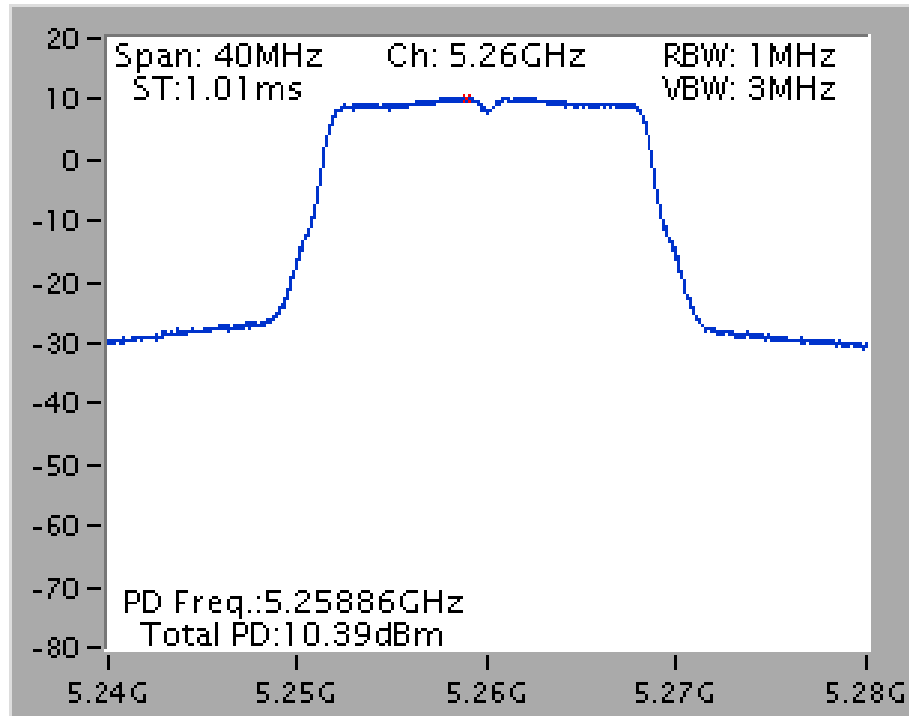

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

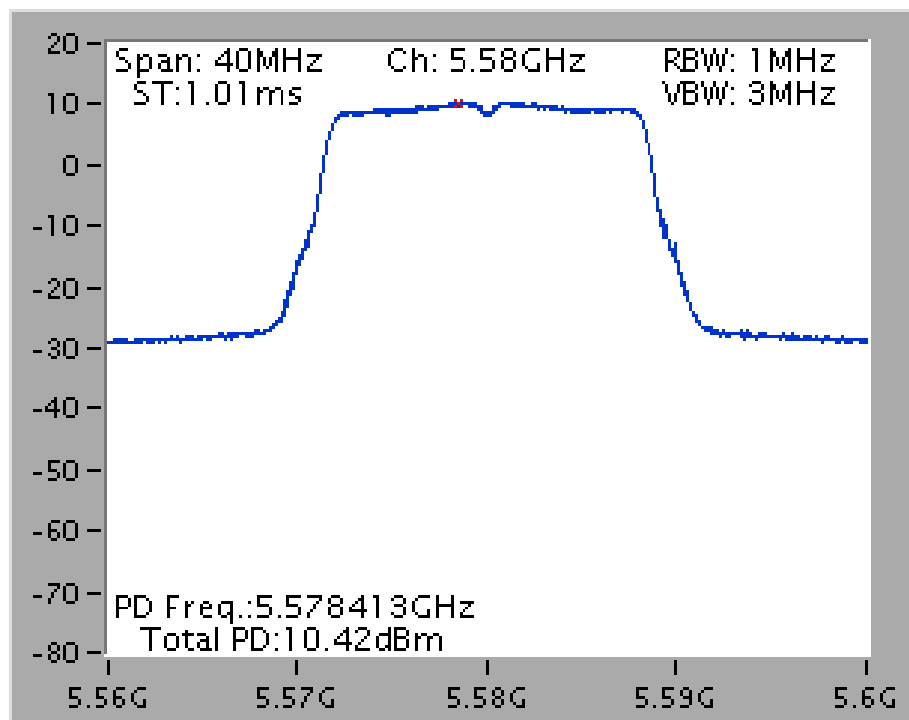



## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

### 4.5.3. Test Procedures

- Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port.  
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	63%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5260MHz	9.14	13	Complies
QPSK (MCS1)	5260MHz	8.69	13	Complies
16QAM (MCS3)	5260MHz	9.07	13	Complies
64QAM (MCS5)	5260MHz	9.11	13	Complies
256QAM (MCS8)	5260MHz	9.84	13	Complies
BPSK (MCS0)	5580MHz	8.90	13	Complies
QPSK (MCS1)	5580MHz	9.82	13	Complies
16QAM (MCS3)	5580MHz	9.14	13	Complies
64QAM (MCS5)	5580MHz	9.04	13	Complies
256QAM (MCS8)	5580MHz	9.35	13	Complies

##### Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5270MHz	9.32	13	Complies
QPSK (MCS1)	5270MHz	9.41	13	Complies
16QAM (MCS3)	5270MHz	9.46	13	Complies
64QAM (MCS5)	5270MHz	9.35	13	Complies
256QAM (MCS8)	5270MHz	10.32	13	Complies
BPSK (MCS0)	5670MHz	9.13	13	Complies
QPSK (MCS1)	5670MHz	8.76	13	Complies
16QAM (MCS3)	5670MHz	8.85	13	Complies
64QAM (MCS5)	5670MHz	9.33	13	Complies
256QAM (MCS8)	5670MHz	9.72	13	Complies

**Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3**

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5290MHz	9.71	13	Complies
QPSK (MCS1)	5290MHz	9.56	13	Complies
16QAM (MCS3)	5290MHz	9.93	13	Complies
64QAM (MCS5)	5290MHz	9.41	13	Complies
256QAM (MCS8)	5290MHz	9.86	13	Complies
BPSK (MCS0)	5530MHz	9.51	13	Complies
QPSK (MCS1)	5530MHz	8.82	13	Complies
16QAM (MCS3)	5530MHz	9.45	13	Complies
64QAM (MCS5)	5530MHz	10.56	13	Complies
256QAM (MCS8)	5530MHz	9.60	13	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3**

<b>Modulation</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
BPSK (6Mbps)	5260MHz	8.69	13	<b>Complies</b>
QPSK (12Mbps)	5260MHz	8.46	13	<b>Complies</b>
16QAM (24Mbps)	5260MHz	8.21	13	<b>Complies</b>
64QAM (48Mbps)	5260MHz	8.74	13	<b>Complies</b>
BPSK (6Mbps)	5580MHz	8.25	13	<b>Complies</b>
QPSK (12Mbps)	5580MHz	8.12	13	<b>Complies</b>
16QAM (24Mbps)	5580MHz	8.58	13	<b>Complies</b>
64QAM (48Mbps)	5580MHz	8.97	13	<b>Complies</b>

Note: All the test values were listed in the report.


For plots, only the modulation with worse result was shown.

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5260 MHz**

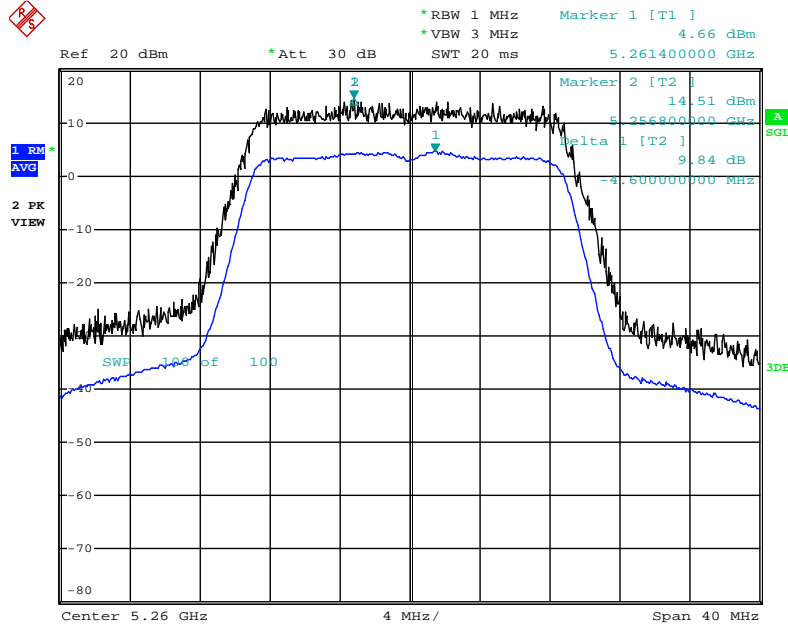


Date: 19.FEB.2014 22:07:34

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / QPSK(MCS1) / 5580 MHz**

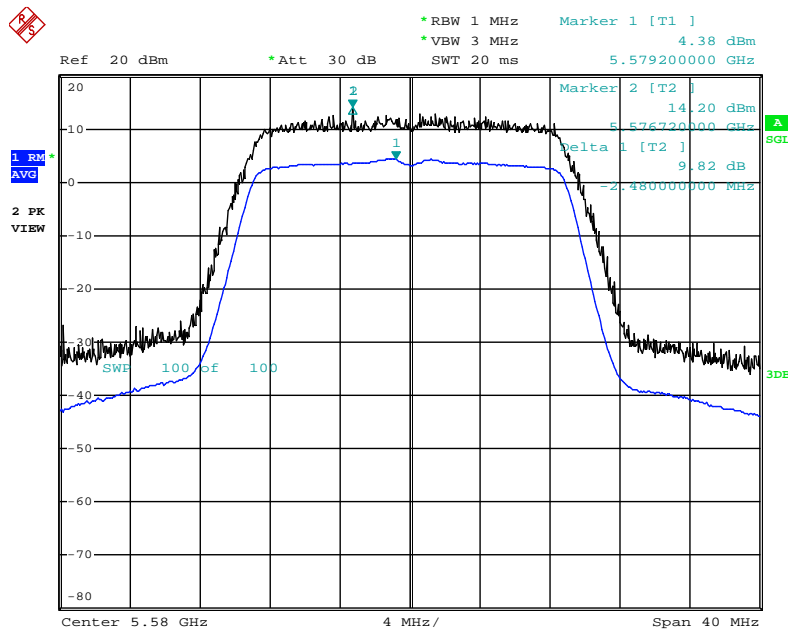


Date: 19.FEB.2014 22:10:01

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5270 MHz**

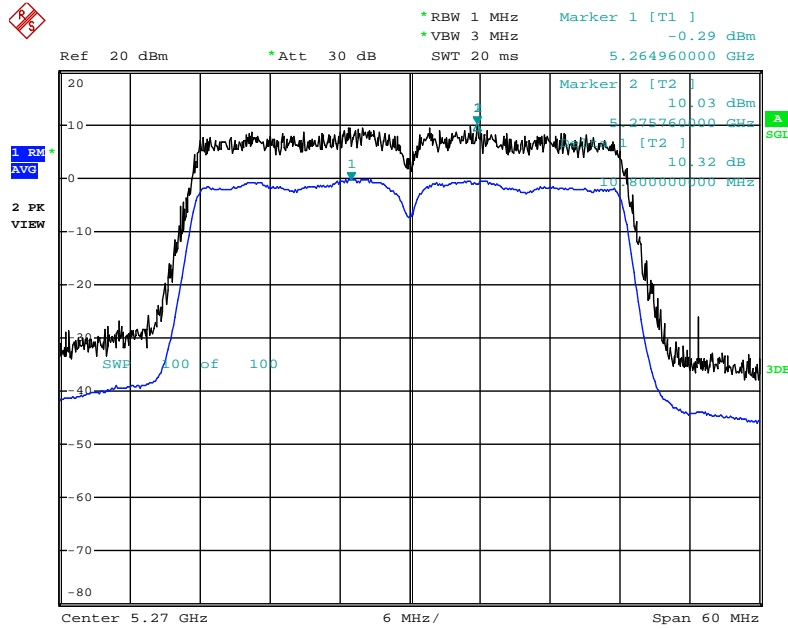


Date: 19.FEB.2014 22:15:11

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5670 MHz**

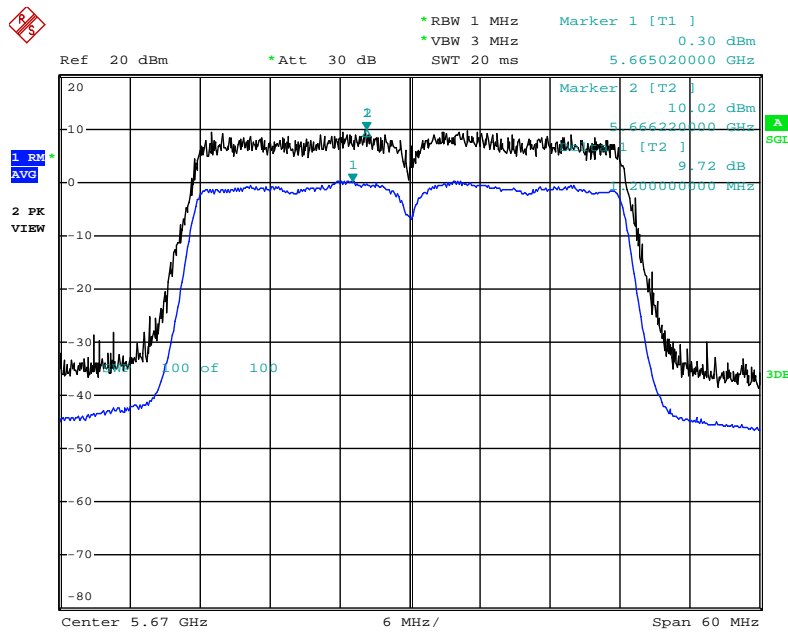


Date: 19.FEB.2014 22:29:47

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 16QAM(MCS3) / 5290 MHz**

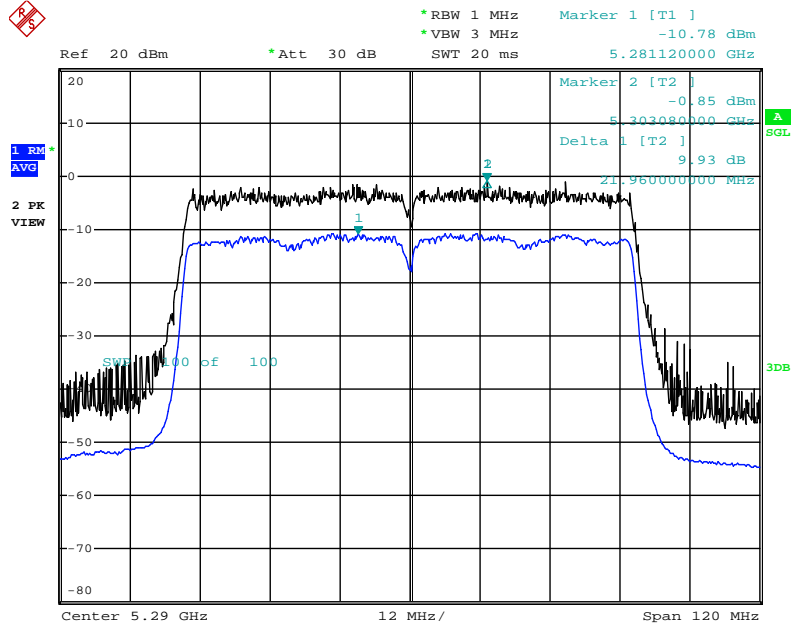


Date: 19.FEB.2014 22:17:56

**Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(MCS5) / 5530 MHz**

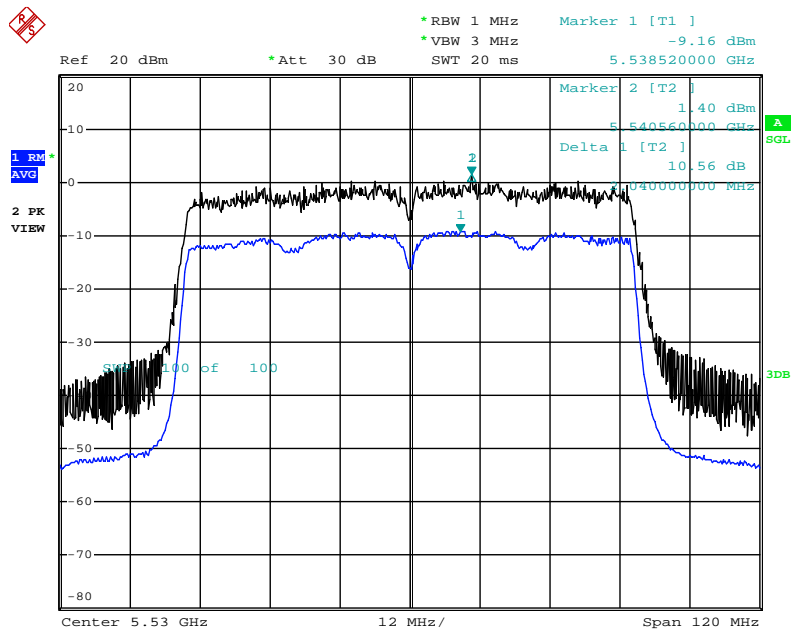


Date: 19.FEB.2014 22:35:12

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps) / 5260 MHz**

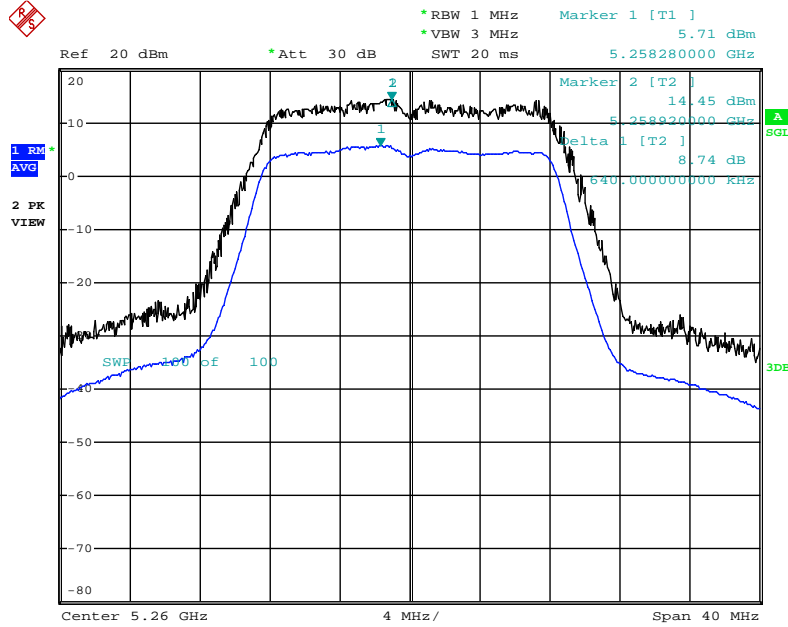

Date: 19.FEB.2014 22:00:08

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps) / 5580 MHz**

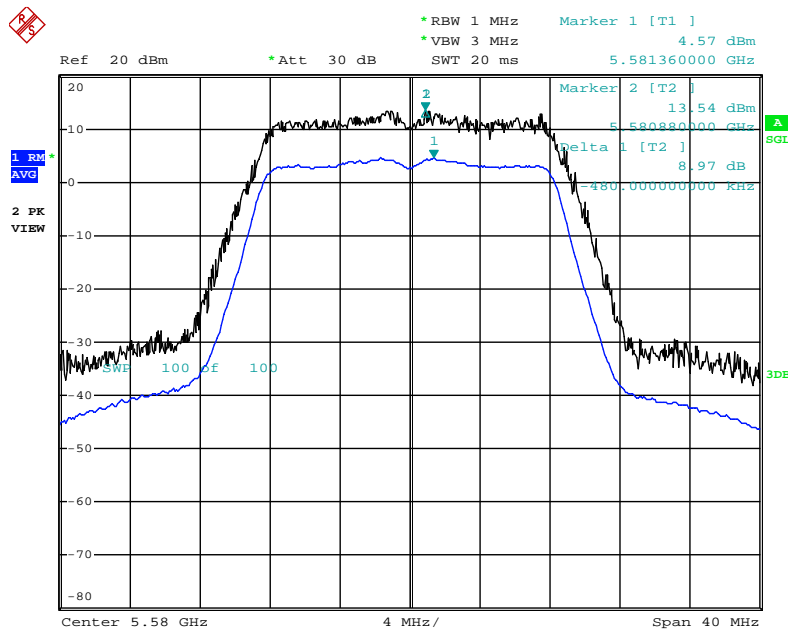

Date: 19.FEB.2014 22:03:31



## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

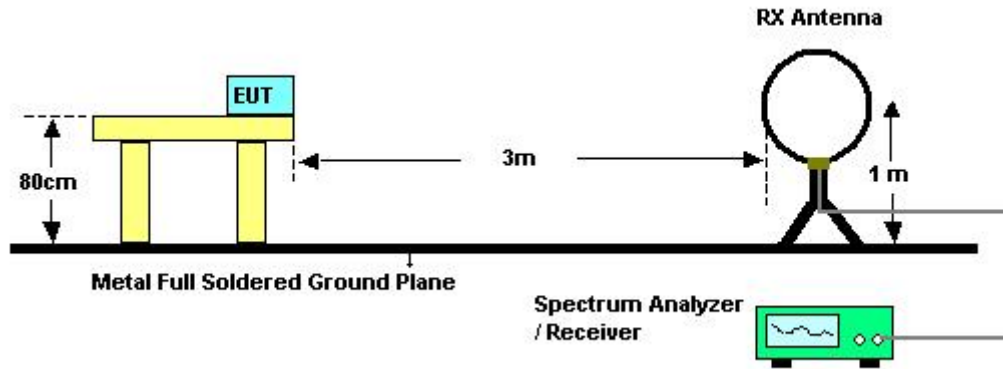

For Radiated Emissions: 30MHz~1GHz

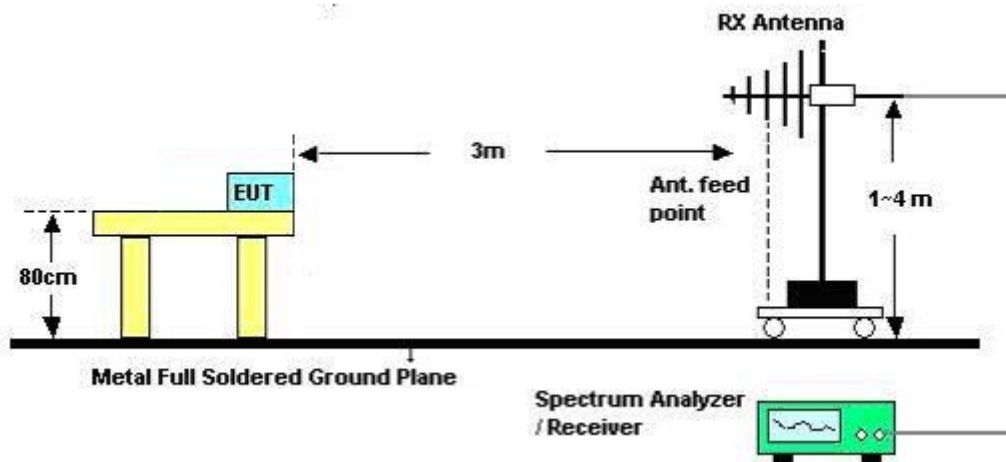

**For Radiated Emissions: Above 1GHz**

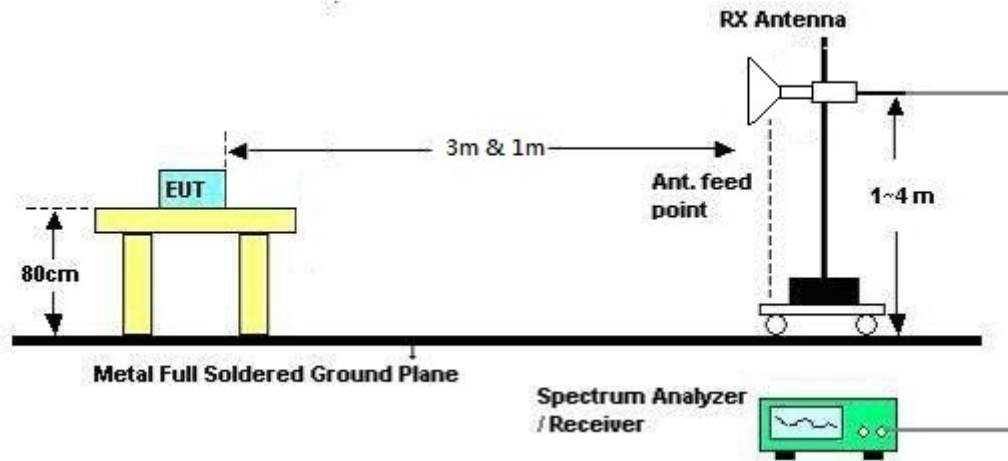

**4.6.5. Test Deviation**

There is no deviation with the original standard.

**4.6.6. EUT Operation during Test**

For IEEE 802.11a: Non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

For IEEE 802.11ac: Beamforming mode

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Dec. 30, 2013	<b>Test Mode</b>	Mode 1

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	53%
Test Engineer	YC Chen	Test Engineer	Normal Link
Test Mode	Mode 1		

Horizontal

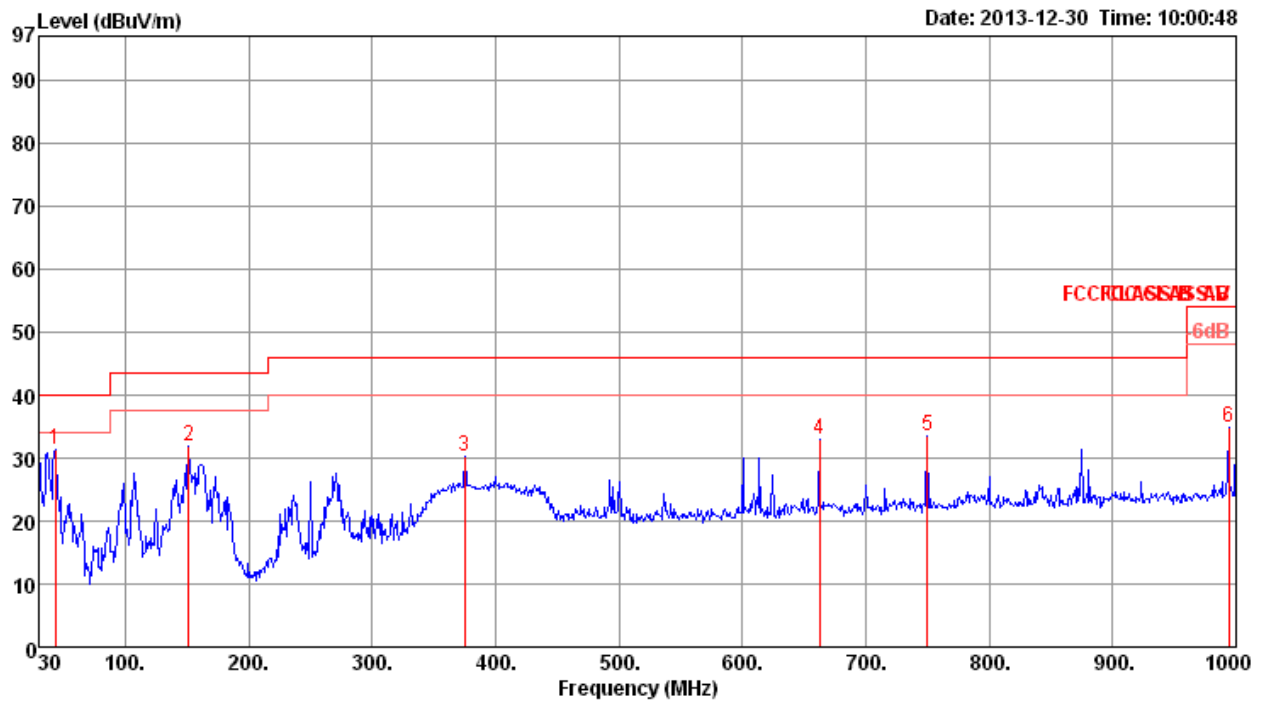

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	43.58	31.45	40.00	-8.55	47.65	0.72	10.88	27.80	400	0	HORIZONTAL
2	151.25	31.75	43.50	-11.75	45.81	1.41	11.87	27.34	400	0	HORIZONTAL
3	375.32	30.34	46.00	-15.66	40.17	2.20	15.40	27.43	400	0	HORIZONTAL
4	662.44	32.84	46.00	-13.16	38.89	3.02	18.97	28.04	400	0	HORIZONTAL
5	749.74	33.38	46.00	-12.62	38.55	3.20	19.43	27.80	400	0	HORIZONTAL
6	994.18	34.76	54.00	-19.24	36.86	3.68	21.25	27.03	400	0	HORIZONTAL

**Vertical**

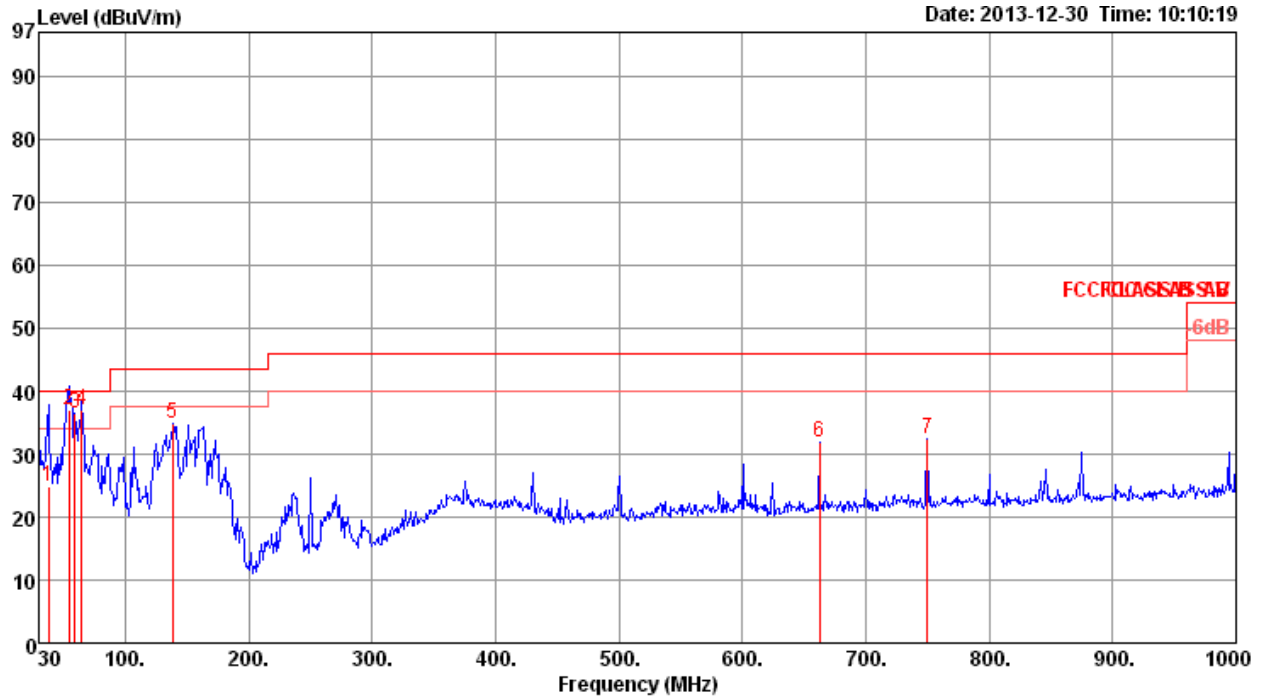

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	37.76	24.83	40.00	-15.17	37.65	0.68	14.30	27.80	QP	101	300	VERTICAL
2	54.25	36.96	40.00	-3.04	56.06	0.85	7.83	27.78	QP	100	267	VERTICAL
3	59.10	36.43	40.00	-3.57	56.34	0.90	6.95	27.76	Peak	400	0	VERTICAL
4	64.92	36.95	40.00	-3.05	57.05	0.94	6.70	27.74	Peak	182	133	VERTICAL
5	138.64	34.83	43.50	-8.67	48.48	1.42	12.34	27.41	Peak	400	0	VERTICAL
6	662.44	31.91	46.00	-14.09	37.96	3.02	18.97	28.04	Peak	400	0	VERTICAL
7	749.74	32.55	46.00	-13.45	37.72	3.20	19.43	27.80	Peak	400	0	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15781.80	38.33	54.00	-15.67	30.20	6.14	37.41	35.42	Average	100	152	HORIZONTAL
2	15782.28	51.13	74.00	-22.87	43.00	6.14	37.41	35.42	Peak	100	152	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15779.16	51.32	74.00	-22.68	43.19	6.14	37.41	35.42	Peak	100	235	VERTICAL
2	15782.06	38.44	54.00	-15.56	30.31	6.14	37.41	35.42	Average	100	235	VERTICAL





<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10600.04	44.09	54.00	-9.91	36.12	5.01	38.38	35.42	Average	100	112	HORIZONTAL
2	10600.06	51.25	74.00	-22.75	43.28	5.01	38.38	35.42	Peak	100	112	HORIZONTAL
3	15900.58	50.75	74.00	-23.25	42.75	6.15	37.29	35.44	Peak	100	150	HORIZONTAL
4	15902.70	38.50	54.00	-15.50	30.50	6.15	37.29	35.44	Average	100	150	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10600.00	45.17	54.00	-8.83	37.20	5.01	38.38	35.42	Average	100	125	VERTICAL
2	10600.00	51.36	74.00	-22.64	43.39	5.01	38.38	35.42	Peak	100	125	VERTICAL
3	15899.52	38.54	54.00	-15.46	30.54	6.15	37.29	35.44	Average	100	343	VERTICAL
4	15900.48	51.39	74.00	-22.61	43.39	6.15	37.29	35.44	Peak	100	343	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10639.96	43.05	54.00	-10.95	35.06	5.01	38.37	35.39	Average	100	120	HORIZONTAL
2	10640.04	51.65	74.00	-22.35	43.66	5.01	38.37	35.39	Peak	100	120	HORIZONTAL
3	15956.32	51.06	74.00	-22.94	43.12	6.15	37.23	35.44	Peak	100	217	HORIZONTAL
4	15959.84	38.25	54.00	-15.75	30.31	6.15	37.23	35.44	Average	100	217	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10639.92	51.86	74.00	-22.14	43.87	5.01	38.37	35.39	Peak	100	126	VERTICAL
2	10639.96	45.07	54.00	-8.93	37.08	5.01	38.37	35.39	Average	100	126	VERTICAL
3	15962.12	38.35	54.00	-15.65	30.41	6.15	37.23	35.44	Average	100	80	VERTICAL
4	15963.14	51.14	74.00	-22.86	43.20	6.15	37.23	35.44	Peak	100	80	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10999.78	50.60	74.00	-23.40	42.37	5.01	38.32	35.10	Peak	100	109	HORIZONTAL
2	10999.88	42.95	54.00	-11.05	34.72	5.01	38.32	35.10	Average	100	109	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11000.00	40.34	54.00	-13.66	32.13	5.01	38.30	35.10	Average	100	128	VERTICAL
2	11000.02	51.39	74.00	-22.61	43.18	5.01	38.30	35.10	Peak	100	128	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11159.92	43.14	54.00	-10.86	34.80	5.04	38.47	35.17	Average	100	128	HORIZONTAL
2	11160.08	51.60	74.00	-22.40	43.26	5.04	38.47	35.17	Peak	100	128	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11159.84	44.94	54.00	-9.06	36.60	5.04	38.47	35.17	Average	100	70	VERTICAL
2	11160.04	57.40	74.00	-16.60	49.06	5.04	38.47	35.17	Peak	100	70	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11399.96	40.63	54.00	-13.37	32.08	5.10	38.70	35.25	Average	100	125	HORIZONTAL
2	11400.10	50.12	74.00	-23.88	41.57	5.10	38.70	35.25	Peak	100	125	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11399.90	41.02	54.00	-12.98	32.47	5.10	38.70	35.25	Average	100	66	VERTICAL
2	11399.92	50.37	74.00	-23.63	41.82	5.10	38.70	35.25	Peak	100	66	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15808.92	50.05	74.00	-23.95	41.95	6.14	37.39	35.43	Peak	100	143	HORIZONTAL
2	15810.70	38.20	54.00	-15.80	30.12	6.14	37.37	35.43	Average	100	143	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15807.98	38.27	54.00	-15.73	30.17	6.14	37.39	35.43	Average	100	360	VERTICAL
2	15809.86	50.76	74.00	-23.24	42.66	6.14	37.39	35.43	Peak	100	360	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10619.94	43.03	54.00	-10.97	35.06	5.01	38.38	35.42	Average	100	131	HORIZONTAL
2	10619.96	51.07	74.00	-22.93	43.10	5.01	38.38	35.42	Peak	100	131	HORIZONTAL
3	15932.18	50.60	74.00	-23.40	42.64	6.15	37.25	35.44	Peak	100	135	HORIZONTAL
4	15933.22	38.11	54.00	-15.89	30.15	6.15	37.25	35.44	Average	100	135	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10620.00	43.66	54.00	-10.34	35.69	5.01	38.38	35.42	Average	100	125	VERTICAL
2	10620.08	51.40	74.00	-22.60	43.43	5.01	38.38	35.42	Peak	100	125	VERTICAL
3	15927.56	38.20	54.00	-15.80	30.22	6.15	37.27	35.44	Average	100	285	VERTICAL
4	15934.16	51.03	74.00	-22.97	43.07	6.15	37.25	35.44	Peak	100	285	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11037.80	38.99	54.00	-15.01	30.75	5.02	38.34	35.12	Average	100	13	HORIZONTAL
2	11038.40	50.65	74.00	-23.35	42.41	5.02	38.34	35.12	Peak	100	13	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11019.86	49.56	74.00	-24.44	41.33	5.02	38.32	35.11	Peak	100	125	VERTICAL
2	11019.98	39.84	54.00	-14.16	31.61	5.02	38.32	35.11	Average	100	125	VERTICAL





<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11099.80	50.75	74.00	-23.25	42.46	5.03	38.40	35.14	Peak	100	117	HORIZONTAL
2	11099.84	42.32	54.00	-11.68	34.03	5.03	38.40	35.14	Average	100	117	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11099.88	51.13	74.00	-22.87	42.84	5.03	38.40	35.14	Peak	100	125	VERTICAL
2	11099.92	41.84	54.00	-12.16	33.55	5.03	38.40	35.14	Average	100	125	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11339.92	41.40	54.00	-12.60	32.93	5.08	38.63	35.24	Average	100	126	HORIZONTAL
2	11340.00	50.14	74.00	-23.86	41.67	5.08	38.63	35.24	Peak	100	126	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11339.88	53.72	74.00	-20.28	45.25	5.08	38.63	35.24	Peak	100	70	VERTICAL
2	11339.96	41.74	54.00	-12.26	33.27	5.08	38.63	35.24	Average	100	70	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Feb. 10, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15867.60	45.53	54.00	-8.47	32.64	10.81	37.61	35.53	Average	100	275	HORIZONTAL
2	15896.60	58.06	74.00	-15.94	45.21	10.81	37.56	35.52	Peak	100	275	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15856.00	58.61	74.00	-15.39	45.69	10.81	37.64	35.53	Peak	100	116	VERTICAL
2	15874.20	45.40	54.00	-8.60	32.51	10.81	37.61	35.53	Average	100	116	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11059.86	51.56	74.00	-22.44	43.29	5.03	38.37	35.13	Peak	100	116	HORIZONTAL
2	11059.89	43.68	54.00	-10.32	35.41	5.03	38.37	35.13	Average	100	116	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11059.67	50.68	74.00	-23.32	42.42	5.02	38.37	35.13	Peak	100	59	VERTICAL
2	11059.86	41.19	54.00	-12.81	32.92	5.03	38.37	35.13	Average	100	59	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 52 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 06, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10519.93	45.30	54.00	-8.70	32.94	8.42	38.80	34.86	117	124	HORIZONTAL	Average
2	10520.00	55.59	74.00	-18.41	43.23	8.42	38.80	34.86	117	124	HORIZONTAL	Peak
3	15783.40	45.35	54.00	-8.65	31.08	10.35	38.74	34.82	100	12	HORIZONTAL	Average
4	15783.83	56.44	74.00	-17.56	42.17	10.35	38.74	34.82	100	12	HORIZONTAL	Peak

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10519.86	55.82	74.00	-18.18	43.46	8.42	38.80	34.86	122	131	VERTICAL	Peak
2	10520.02	45.97	54.00	-8.03	33.61	8.42	38.80	34.86	122	131	VERTICAL	Average
3	15778.32	56.84	74.00	-17.16	42.60	10.35	38.70	34.81	100	358	VERTICAL	Peak
4	15778.35	45.39	54.00	-8.61	31.15	10.35	38.70	34.81	100	358	VERTICAL	Average

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 60 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 06, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10599.30	54.57	74.00	-19.43	42.05	8.47	38.91	34.86	100	112	HORIZONTAL	Peak
2	10599.88	44.32	54.00	-9.68	31.80	8.47	38.91	34.86	100	112	HORIZONTAL	Average
3	15899.04	44.87	54.00	-9.13	30.66	10.35	38.82	34.96	100	358	HORIZONTAL	Average
4	15906.64	55.62	74.00	-18.38	41.42	10.35	38.82	34.97	100	358	HORIZONTAL	Peak

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10599.83	55.55	74.00	-18.45	43.03	8.47	38.91	34.86	118	118	VERTICAL	Peak
2	10599.97	44.95	54.00	-9.05	32.43	8.47	38.91	34.86	118	118	VERTICAL	Average
3	15897.70	57.81	74.00	-16.19	43.60	10.35	38.82	34.96	100	23	VERTICAL	Peak
4	15901.28	45.29	54.00	-8.71	31.09	10.35	38.82	34.97	100	23	VERTICAL	Average

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 64 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 06, 2014		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10639.88	55.46	74.00	-18.54	42.87	8.50	38.95	34.86	116	112	HORIZONTAL	Peak
2	10639.96	46.18	54.00	-7.82	33.59	8.50	38.95	34.86	116	112	HORIZONTAL	Average
3	15960.93	45.16	54.00	-8.84	31.00	10.34	38.86	35.04	100	40	HORIZONTAL	Average
4	15961.11	57.98	74.00	-16.02	43.82	10.34	38.86	35.04	100	40	HORIZONTAL	Peak

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10640.03	45.14	54.00	-8.86	32.55	8.50	38.95	34.86	116	120	VERTICAL	Average
2	10640.14	54.51	74.00	-19.49	41.92	8.50	38.95	34.86	116	120	VERTICAL	Peak
3	15960.78	58.96	74.00	-15.04	44.80	10.34	38.86	35.04	100	103	VERTICAL	Peak
4	15961.22	45.29	54.00	-8.71	31.13	10.34	38.86	35.04	100	103	VERTICAL	Average



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 100 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10999.82	50.62	74.00	-23.38	42.39	5.01	38.32	35.10	Peak	100	117	HORIZONTAL
2	10999.92	43.05	54.00	-10.95	34.82	5.01	38.32	35.10	Average	100	117	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10999.90	52.11	74.00	-21.89	43.90	5.01	38.30	35.10	Peak	100	126	VERTICAL
2	10999.98	41.00	54.00	-13.00	32.79	5.01	38.30	35.10	Average	100	126	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 116 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 06, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11159.24	44.98	54.00	-9.02	31.89	8.84	39.10	34.85	100	43	HORIZONTAL	Average
2	11159.92	55.15	74.00	-18.85	42.06	8.84	39.10	34.85	100	43	HORIZONTAL	Peak
3	16737.20	48.80	54.00	-5.20	32.65	10.74	40.30	34.89	100	132	HORIZONTAL	Average
4	16745.08	60.20	74.00	-13.80	44.04	10.75	40.30	34.89	100	132	HORIZONTAL	Peak

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11162.50	60.57	74.00	-13.43	47.48	8.84	39.10	34.85	100	90	VERTICAL	Peak
2	11162.82	47.19	54.00	-6.81	34.10	8.84	39.10	34.85	100	90	VERTICAL	Average
3	16737.08	50.40	54.00	-3.60	34.25	10.74	40.30	34.89	104	74	VERTICAL	Average
4	16737.52	64.86	74.00	-9.14	48.71	10.74	40.30	34.89	104	74	VERTICAL	Peak



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 140 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11397.02	54.01	74.00	-19.99	45.46	5.10	38.70	35.25	Peak	100	130	HORIZONTAL
2	11398.10	41.24	54.00	-12.76	32.69	5.10	38.70	35.25	Average	100	130	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11398.90	51.48	74.00	-22.52	42.93	5.10	38.70	35.25	Peak	100	66	VERTICAL
2	11399.92	40.10	54.00	-13.90	31.55	5.10	38.70	35.25	Average	100	66	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

For IEEE 802.11a: Non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

For IEEE 802.11ac: Beamforming mode

The EUT was programmed to be in beamforming transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 07, 2014		

##### Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5096.50	60.33	74.00	-13.67	21.40	5.96	32.97	0.00	103	351	VERTICAL	Peak
2	5102.00	46.73	54.00	-7.27	7.79	5.96	32.98	0.00	103	351	VERTICAL	Average
3	5258.50	108.55			69.39	6.06	33.10	0.00	103	351	VERTICAL	Average
4	5258.50	118.96			79.80	6.06	33.10	0.00	103	351	VERTICAL	Peak
5	5428.00	52.49	54.00	-1.51	12.68	6.16	33.65	0.00	103	351	VERTICAL	Average
6	5428.00	65.01	74.00	-8.99	25.20	6.16	33.65	0.00	103	351	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

##### Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5301.20	116.13			76.80	6.08	33.25	0.00	114	79	VERTICAL	Peak
2	5301.40	104.19			64.86	6.08	33.25	0.00	114	79	VERTICAL	Average
3	5381.20	52.81	54.00	-1.19	13.18	6.13	33.50	0.00	114	79	VERTICAL	Average
4	5382.20	64.61	74.00	-9.39	24.98	6.13	33.50	0.00	114	79	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

##### Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5318.60	107.28			67.89	6.09	33.30	0.00	112	78	VERTICAL	Average
2	5318.60	118.93			79.54	6.09	33.30	0.00	112	78	VERTICAL	Peak
3	5398.40	65.20	74.00	-8.80	25.51	6.14	33.55	0.00	112	78	VERTICAL	Peak
4	5398.60	52.64	54.00	-1.36	12.95	6.14	33.55	0.00	112	78	VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 140 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5418.00	52.46	54.00	-1.54	14.80	3.51	34.15	0.00	Average	100	145	VERTICAL
2	5425.00	63.95	74.00	-10.05	26.28	3.52	34.15	0.00	Peak	100	145	VERTICAL
3	5470.00	63.24	68.20	-4.96	25.48	3.52	34.24	0.00	Peak	100	145	VERTICAL
4	5497.00	117.38			79.59	3.53	34.26	0.00	Peak	100	145	VERTICAL
5	5502.00	106.37			68.55	3.54	34.28	0.00	Average	100	145	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5698.80	105.86			67.93	3.59	34.34	0.00	Average	101	292	VERTICAL
2	5699.20	117.85			79.92	3.59	34.34	0.00	Peak	101	292	VERTICAL
3	5779.00	66.95	68.20	-1.25	28.97	3.62	34.36	0.00	Peak	101	292	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Channel 54**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5274.00	101.52			64.17	3.47	33.88	0.00 Average	100	358	VERTICAL
2	5274.00	112.22			74.87	3.47	33.88	0.00 Peak	100	358	VERTICAL
3	5356.00	63.02	74.00	-10.98	25.50	3.49	34.03	0.00 Peak	100	358	VERTICAL
4	5357.00	52.59	54.00	-1.41	15.07	3.49	34.03	0.00 Average	100	358	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

**Channel 62**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5296.00	112.38			75.00	3.47	33.91	0.00 Peak	100	42	VERTICAL
2	5298.00	99.90			62.48	3.48	33.94	0.00 Average	100	42	VERTICAL
3	5350.00	52.90	54.00	-1.10	15.38	3.49	34.03	0.00 Average	100	42	VERTICAL
4	5351.20	70.42	74.00	-3.58	32.90	3.49	34.03	0.00 Peak	100	42	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Channel 102**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5425.20	48.25	54.00	-5.75	10.58	3.52	34.15	0.00	Average	100	148	VERTICAL
2	5460.00	60.03	74.00	-13.97	22.30	3.52	34.21	0.00	Peak	100	148	VERTICAL
3	5469.60	67.16	68.20	-1.04	29.40	3.52	34.24	0.00	Peak	100	148	VERTICAL
4	5505.60	112.67			74.85	3.54	34.28	0.00	Peak	100	148	VERTICAL
5	5506.00	101.64			63.82	3.54	34.28	0.00	Average	100	148	VERTICAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

**Channel 110**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	52.62	54.00	-1.38	14.89	3.52	34.21	0.00	Average	100	147	VERTICAL
2	5460.00	62.78	74.00	-11.22	25.05	3.52	34.21	0.00	Peak	100	147	VERTICAL
3	5464.80	64.86	68.20	-3.34	27.13	3.52	34.21	0.00	Peak	100	147	VERTICAL
4	5544.80	105.41			67.55	3.55	34.31	0.00	Average	100	147	VERTICAL
5	5544.80	116.66			78.80	3.55	34.31	0.00	Peak	100	147	VERTICAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

**Channel 134**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5675.60	103.76			65.84	3.59	34.33	0.00	Average	100	44	VERTICAL
2	5676.80	115.90			77.98	3.59	34.33	0.00	Peak	100	44	VERTICAL
3	5736.20	67.02	68.20	-1.18	29.07	3.61	34.34	0.00	Peak	100	44	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.



<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014 ~ Feb. 10, 2014		

**Channel 58**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5144.00	54.92	74.00	-19.08	14.78	6.13	34.01	0.00	Peak	110	191	VERTICAL
2	5150.00	43.09	54.00	-10.91	2.95	6.13	34.01	0.00	Average	110	191	VERTICAL
3	5303.00	96.62			56.07	6.23	34.32	0.00	Average	110	191	VERTICAL
4	5306.00	110.47			69.92	6.23	34.32	0.00	Peak	110	191	VERTICAL
5	5350.00	52.82	54.00	-1.18	12.14	6.26	34.42	0.00	Average	110	191	VERTICAL
6	5356.00	67.56	74.00	-6.44	26.88	6.26	34.42	0.00	Peak	110	191	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

**Channel 106**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5459.00	67.54	74.00	-6.46	29.81	3.52	34.21	0.00	Peak	100	148	VERTICAL
2	5460.00	52.70	54.00	-1.30	14.97	3.52	34.21	0.00	Average	100	148	VERTICAL
3	5467.00	67.07	68.20	-1.13	29.34	3.52	34.21	0.00	Peak	100	148	VERTICAL
4	5506.00	96.96			59.14	3.54	34.28	0.00	Average	100	148	VERTICAL
5	5508.00	107.31			69.49	3.54	34.28	0.00	Peak	100	148	VERTICAL
6	5725.00	53.00	68.20	-15.20	15.06	3.60	34.34	0.00	Peak	100	148	VERTICAL

Item 4, 5 are the fundamental frequency at 5530 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 06, 2014		

**Channel 52**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5094.00	62.64	74.00	-11.36	23.71	5.96	32.97	0.00	113	83	VERTICAL	Peak
2	5102.00	47.45	54.00	-6.55	8.51	5.96	32.98	0.00	113	83	VERTICAL	Average
3	5262.00	120.72			81.56	6.06	33.10	0.00	113	83	VERTICAL	Peak
4	5262.50	110.90			71.69	6.06	33.15	0.00	113	83	VERTICAL	Average
5	5413.50	63.40	74.00	-10.60	23.65	6.15	33.60	0.00	113	83	VERTICAL	Peak
6	5422.50	52.91	54.00	-1.09	13.10	6.16	33.65	0.00	113	83	VERTICAL	Average

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5303.00	103.28			63.94	6.09	33.25	0.00	113	80	VERTICAL	Average
2	5303.00	113.44			74.10	6.09	33.25	0.00	113	80	VERTICAL	Peak
3	5382.80	63.49	74.00	-10.51	23.86	6.13	33.50	0.00	113	80	VERTICAL	Peak
4	5383.00	52.89	54.00	-1.11	13.26	6.13	33.50	0.00	113	80	VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5322.60	116.80			77.40	6.10	33.30	0.00	113	79	VERTICAL	Peak
2	5323.00	106.89			67.49	6.10	33.30	0.00	113	79	VERTICAL	Average
3	5398.00	52.99	54.00	-1.01	13.30	6.14	33.55	0.00	113	79	VERTICAL	Average
4	5399.20	65.12	74.00	-8.88	25.43	6.14	33.55	0.00	113	79	VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	53%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11a CH 100, 140 / Ant. 1 + Ant. 2 + Ant. 3
<b>Test Date</b>	Jan. 08, 2014		

**Channel 100**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5418.40	52.34	54.00	-1.66	14.68	3.51	34.15	0.00	Average	100	150	VERTICAL
2	5418.80	63.37	74.00	-10.63	25.71	3.51	34.15	0.00	Peak	100	150	VERTICAL
3	5469.60	61.47	68.20	-6.73	23.71	3.52	34.24	0.00	Peak	100	150	VERTICAL
4	5498.40	116.84			79.05	3.53	34.26	0.00	Peak	100	150	VERTICAL
5	5498.80	106.67			68.88	3.53	34.26	0.00	Average	100	150	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

**Channel 140**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5698.40	106.60			68.67	3.59	34.34	0.00	Average	100	290	VERTICAL
2	5698.40	117.07			79.14	3.59	34.34	0.00	Peak	100	290	VERTICAL
3	5779.20	66.71	68.20	-1.49	28.73	3.62	34.36	0.00	Peak	100	290	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-5^\circ\text{C} \sim 45^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

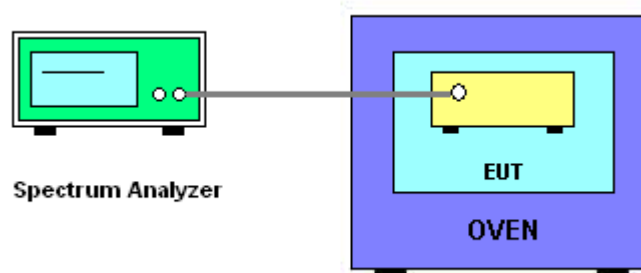

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	25°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	David Tseng	<b>Test Date</b>	Feb. 19, 2014

#### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
126.50	5299.9880	5499.9724
110.00	5299.9832	5499.9718
93.50	5299.9820	5499.9718
Max. Deviation (MHz)	<b>0.018000</b>	<b>0.028200</b>
Max. Deviation (ppm)	<b>3.40</b>	<b>5.13</b>

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
-5	5299.9874	5499.9762
0	5299.9885	5499.9612
10	5299.9888	5499.9934
20	5299.9924	5500.0242
30	5300.0068	5500.0244
40	5300.0110	5500.0278
45	5300.0124	5500.0314
Max. Deviation (MHz)	<b>0.012600</b>	<b>0.038800</b>
Max. Deviation (ppm)	<b>2.38</b>	<b>7.05</b>

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



---

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.



## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $Uc(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2Uc(y)$				2.4

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	$\pm 0.173$	dB	K=1	0.086
Cable loss	$\pm 0.174$	dB	K=2	0.087
Antenna gain	$\pm 0.169$	dB	K=2	0.084
Site imperfection	$\pm 0.433$	dB	Triangular	0.214
Pre-amplifier gain	$\pm 0.366$	dB	K=2	0.183
Transmitter antenna	$\pm 1.200$	dB	Rectangular	0.600
Signal generator	$\pm 0.461$	dB	Rectangular	0.231
Mismatch	$\pm 0.080$	dB	U-shape	0.040
Spectrum analyzer	$\pm 0.500$	dB	Rectangular	0.250
Combined standard uncertainty $Uc(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2Uc(y)$				3.555

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

**Uncertainty of Conducted Emission Measurement**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726