



# FCC TEST REPORT

**REPORT NO.:** RF940201H01  
**MODEL NO.:** WN4401C-ZZ  
**RECEIVED:** Feb. 01, 2005  
**TESTED:** Feb. 05 to Mar. 09, 2005  
**ISSUED:** Mar. 14, 2005

**APPLICANT:** Arcadyan Technology Corporation

**ADDRESS:** 4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 126 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536  
ILAC MRA



No. 2177-01



## Table of Contents

1	CERTIFICATION .....	5
2	SUMMARY OF TEST RESULTS.....	6
3	GENERAL INFORMATION .....	7
3.1	GENERAL DESCRIPTION OF EUT .....	7
3.2	DESCRIPTION OF TEST MODES .....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	10
3.4	DESCRIPTION OF SUPPORT UNITS .....	11
3.5	CONFIGURATION OF SYSTEM UNDER TEST .....	11
4	TEST TYPES AND RESULTS.....	12
4.1	CONDUCTED EMISSION MEASUREMENT .....	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS .....	12
4.1.3	TEST PROCEDURES.....	13
4.1.4	TEST SETUP .....	13
4.1.5	EUT OPERATING CONDITIONS.....	14
4.1.6	TEST RESULTS.....	15
4.2	RADIATED EMISSION MEASUREMENT.....	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	17
4.2.2	TEST INSTRUMENTS .....	18
4.2.3	TEST PROCEDURES.....	19
4.2.4	TEST SETUP .....	20
4.2.5	EUT OPERATING CONDITIONS.....	20
4.2.6	TEST RESULTS (MODE 1).....	21
4.2.7	TEST RESULTS (MODE 1 - ANTENNA 2 – DSSS).....	22
4.2.8	TEST RESULTS (MODE 1 - ANTENNA 5 – DSSS).....	25
4.2.9	TEST RESULTS (MODE 1 - ANTENNA 2 – OFDM).....	28
4.2.10	TEST RESULTS (MODE 1 - ANTENNA 5 – OFDM).....	31
4.2.11	TEST RESULTS (MODE 2).....	34
4.2.12	TEST RESULTS (MODE 2 - ANTENNA 2 – DSSS).....	35
4.2.13	TEST RESULTS (MODE 2 - ANTENNA 2 – OFDM).....	38
4.2.14	TEST RESULTS (MODE 3).....	41
4.2.15	TEST RESULTS (MODE 3 - ANTENNA 6 – DSSS).....	42
4.2.16	TEST RESULTS (MODE 3 - ANTENNA 5 – DSSS).....	45
4.2.17	TEST RESULTS (MODE 3 - ANTENNA 6 – OFDM).....	48
4.2.18	TEST RESULTS (MODE 3 - ANTENNA 5 – OFDM).....	51
4.3	6DB BANDWIDTH MEASUREMENT .....	54
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT.....	54
4.3.2	TEST INSTRUMENTS .....	54
4.3.3	TEST PROCEDURE .....	55



4.3.4	TEST SETUP .....	55
4.3.5	EUT OPERATING CONDITIONS.....	55
4.3.6	TEST RESULTS (MAIN ANTENNA CONNECTOR – DSSS) .....	56
4.3.7	TEST RESULTS (MAIN ANTENNA CONNECTOR – OFDM) .....	59
4.3.8	TEST RESULTS (AUX ANTENNA CONNECTOR – DSSS).....	62
4.3.9	TEST RESULTS (AUX ANTENNA CONNECTOR – OFDM) .....	65
4.4	MAXIMUM PEAK OUTPUT POWER.....	68
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	68
4.4.2	TEST INSTRUMENTS .....	68
4.4.3	TEST PROCEDURES.....	69
4.4.4	TEST SETUP .....	69
4.4.5	EUT OPERATING CONDITIONS.....	69
4.4.6	TEST RESULTS (MAIN ANTENNA CONNECTOR – DSSS) .....	70
4.4.7	TEST RESULTS (MAIN ANTENNA CONNECTOR – OFDM) .....	70
4.4.8	TEST RESULTS (AUX ANTENNA CONNECTOR – DSSS).....	71
4.4.9	TEST RESULTS (AUX ANTENNA CONNECTOR – OFDM) .....	71
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	72
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	72
4.5.2	TEST INSTRUMENTS .....	72
4.5.3	TEST PROCEDURE .....	73
4.5.4	TEST SETUP .....	73
4.5.5	EUT OPERATING CONDITIONS.....	73
4.5.6	TEST RESULTS (MAIN ANTENNA CONNECTOR – DSSS) .....	74
4.5.7	TEST RESULTS (MAIN ANTENNA CONNECTOR – OFDM) .....	77
4.5.8	TEST RESULTS (AUX ANTENNA CONNECTOR – DSSS).....	80
4.5.9	TEST RESULTS (AUX ANTENNA CONNECTOR – OFDM) .....	83
4.6	BAND EDGES MEASUREMENT.....	86
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	86
4.6.2	TEST INSTRUMENTS .....	86
4.6.3	TEST PROCEDURE .....	86
4.6.4	EUT OPERATING CONDITION.....	86
4.6.5	TEST RESULTS (MODE 1 - MAIN ANTENNA CONNECTOR – ANTENNA 2 – DSSS) .....	87
4.6.6	TEST RESULTS (MODE1 - MAIN ANTENNA CONNECTOR – ANTENNA 2 – OFDM) .....	90
4.6.7	TEST RESULTS (MODE 1 - AUX ANTENNA CONNECTOR – ANTENNA 5 – DSSS).....	93
4.6.8	TEST RESULTS (MODE1 - AUX ANTENNA CONNECTOR – ANTENNA 5 – OFDM) .....	96
4.6.9	TEST RESULTS (MODE 2 - AUX ANTENNA CONNECTOR – ANTENNA 2 – DSSS).....	99
4.6.10	TEST RESULTS (MODE2 - AUX ANTENNA CONNECTOR – ANTENNA 2 – OFDM) .....	102
4.6.11	TEST RESULTS (MODE 3 - MAIN ANTENNA CONNECTOR – ANTENNA 6 – DSSS) ....	105
4.6.12	TEST RESULTS (MODE3 - MAIN ANTENNA CONNECTOR – ANTENNA 6 – OFDM) ....	108
4.6.13	TEST RESULTS (MODE 3 - AUX ANTENNA CONNECTOR – ANTENNA 5 – DSSS).....	111
4.6.14	TEST RESULTS (MODE3 - AUX ANTENNA CONNECTOR – ANTENNA 5 – OFDM) .....	114



4.7	ANTENNA REQUIREMENT .....	117
4.7.1	STANDARD APPLICABLE .....	117
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	117
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	118
6	INFORMATION ON THE TESTING LABORATORIES .....	126



## 1 CERTIFICATION

**PRODUCT :** WLAN MINI PCI CARD  
**BRAND NAME :** No brand  
**MODEL NO. :** WN4401C-ZZ  
**TESTED:** Feb. 05 to Mar. 09, 2005  
**APPLICANT :** Arcadyan Technology Corporation  
**TEST ITEM:** ENGINEERING SAMPLE  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment (Model: WN4401C-ZZ) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Carol Liao , **DATE:** Mar. 14, 2005  
( Carol Liao )

**TECHNICAL ACCEPTANCE :** Hank Chung , **DATE:** Mar. 14, 2005  
Responsible for RF ( Hank Chung )

**APPROVED BY :** Eric Lin , **DATE:** Mar. 14, 2005  
( Eric Lin, Manager )



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.23 dB at 0.455 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.3 dB at 2390.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	WLAN MINI PCI CARD
<b>MODEL NO.</b>	WN4401C-ZZ
<b>POWER SUPPLY</b>	DC 3.3V from host equipment
<b>MODULATION TYPE</b>	BPSK, QPSK, CCK, 16QAM, 64QAM
<b>RADIO TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	21.3 dBm
<b>ANTENNA TYPE</b>	Please see note 3
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. There are six antennas provided to this EUT, please refer to the following table:

No.	Antenna Model No.	Antenna Type	Antenna Connector	Gain (dBi)	Note
1	AN4021	Dipole	RPSMA	2dBi	Tx / Rx
2	120300009100J	Dipole	RPSMA	2dBi	Tx / Rx
3	120300009200J	Dipole	RPSMA	2dBi	Tx / Rx
4	Sleeve Dipole Antenna	Dipole	NA	2dBi	Tx / Rx
5	Butterfly Antenna type 3	PCB Dipole	NA	2dBi	Tx / Rx
6	PIFA	PIFA	NA	2dBi	Tx / Rx



4. The EUT has two antenna connectors, both antenna connectors (MAIN Antenna Connector & AUX Antenna Connector) have diversity function and different power level. The above six antennas are provided to this EUT per the following table:

	Dipole Antenna				PCB Antenna	
	Antenna 1	Antenna 2	Antenna 3	Antenna 4	Antenna 5	Antenna 6
1 External + 1 Internal	V (*Note 1)				V (*Note 2)	
		<b>V(*Note 1)</b>			<b>V(*Note 2)</b>	
			V(*Note 1)		V(*Note 2)	
				V(*Note 1)	V(*Note 2)	
2 External		<b>V(x2)</b>				
			V(x2)			
				V(x2)		
2 Internal					<b>V(*Note 2)</b>	<b>V(*Note 1)</b>

\*Note 1: MAIN Antenna Connector  
 \*Note 2: AUX Antenna Connector  
 Only bold type characters in table were selected and recorded in this test report.

5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.





### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

- Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
- Above 1 GHz, the channel 1, 6, and 11 were tested individually.
- Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.
- Below 1 GHz, the EUT was pre-tested MAIN Antenna Connector and AUX Antenna Connector under the following test modes in chamber:

Test Mode	MAIN Antenna Connector	AUX Antenna Connector
1	Antenna 2	Antenna 5
2	Antenna 2	Antenna 2
3	Antenna 6	Antenna 5

AUX Antenna Connector, worse case one, was chosen for final test.

- Above 1 GHz and Band Edge Measurement, the EUT was tested under the following test modes:

Test Mode	Antenna	Antenna Connector
1	Antenna 2	MAIN Antenna Connector
	Antenna 5	AUX Antenna Connector
2	Antenna 2	AUX Antenna Connector
3	Antenna 6	MAIN Antenna Connector
	Antenna 5	AUX Antenna Connector

For test mode 2, MAIN Antenna Connector and AUX Antenna Connector were pre-tested in chamber. AUX Antenna Connector, worse case one, was chosen for final test.



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a WLAN MINI PCI CARD. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**47 CFR Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 2003**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	ASUS	A2400H	49NG038481	NA
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X

No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

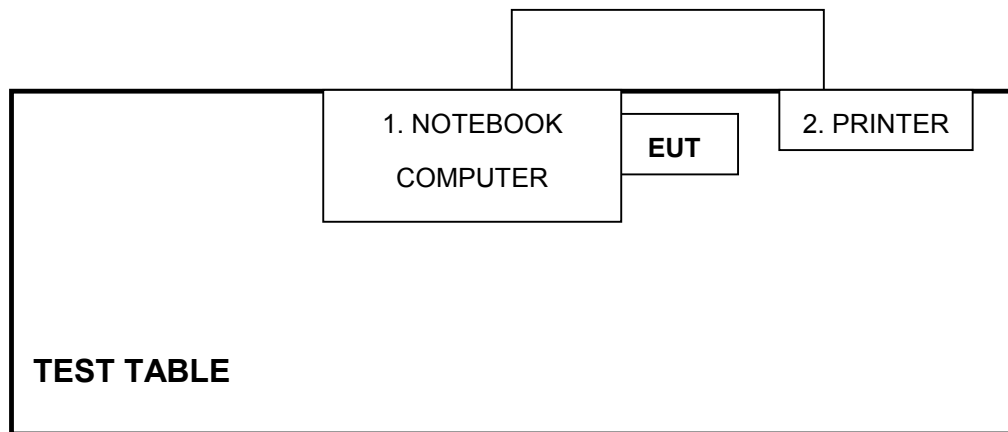

**NOTE:** 1. Please refer to the photos of test configuration in Item 5 also.



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 07, 2005
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 08, 2005
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2005
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 02, 2005
Terminator(for KYORITSU)	50	3	May 10, 2005
Software	Cond-V2e	NA	NA


**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4

### 4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

### 4.1.4 TEST SETUP

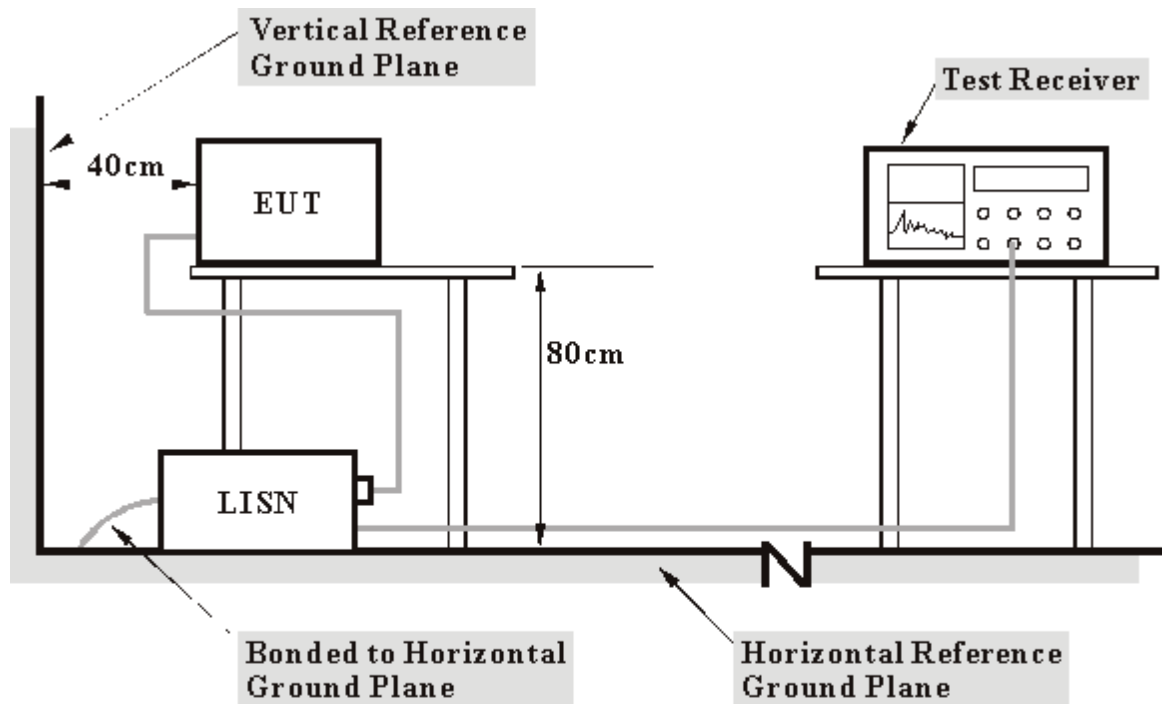

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### 4.1.5 EUT OPERATING CONDITIONS

- a. Connect the EUT with the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program "ART 52 B 10" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to printer, and the printer prints them on paper.




4.1.6 TEST RESULTS

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODE</b>	Channel 11	<b>MODEL</b>	WN4401C-ZZ
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>6dB BANDWIDTH</b>	9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 83 %RH, 985 hPa	<b>PHASE</b>	Line (L)
<b>TESTED BY</b>	Wen Yu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.14	45.92	-	46.06	-	65.18
2	0.224	0.15	45.74	-	45.89	-	62.66	52.66	-16.77	-
3	0.338	0.16	43.84	-	44.00	-	59.26	49.26	-15.26	-
4	0.478	0.17	40.14	-	40.31	-	56.37	46.37	-16.06	-
5	0.673	0.18	37.95	-	38.13	-	56.00	46.00	-17.87	-
6	1.314	0.22	34.93	-	35.15	-	56.00	46.00	-20.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

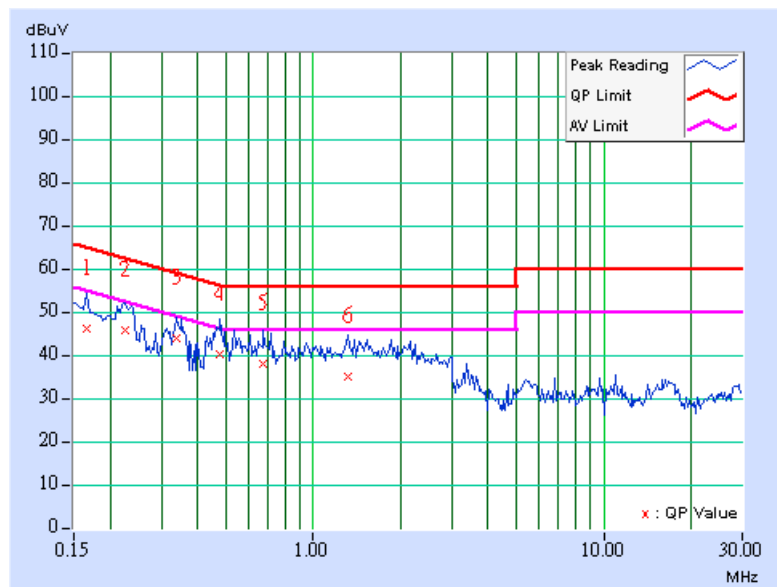




<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODE</b>	Channel 11	<b>MODEL</b>	WN4401C-ZZ
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>6dB BANDWIDTH</b>	9 kHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 83 %RH, 985 hPa	<b>PHASE</b>	Neutral (N)
<b>TESTED BY</b>	Wen Yu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.236	0.15	45.36	-	45.51	-	62.24
2	0.351	0.17	43.41	-	43.58	-	58.94	48.94	-15.37	-
<b>3</b>	<b>0.455</b>	<b>0.17</b>	<b>41.39</b>	-	<b>41.56</b>	-	<b>56.79</b>	<b>46.79</b>	<b>-15.23</b>	-
4	0.548	0.18	39.65	-	39.83	-	56.00	46.00	-16.17	-
5	0.685	0.18	38.44	-	38.62	-	56.00	46.00	-17.38	-
6	0.916	0.20	35.08	-	35.28	-	56.00	46.00	-20.72	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

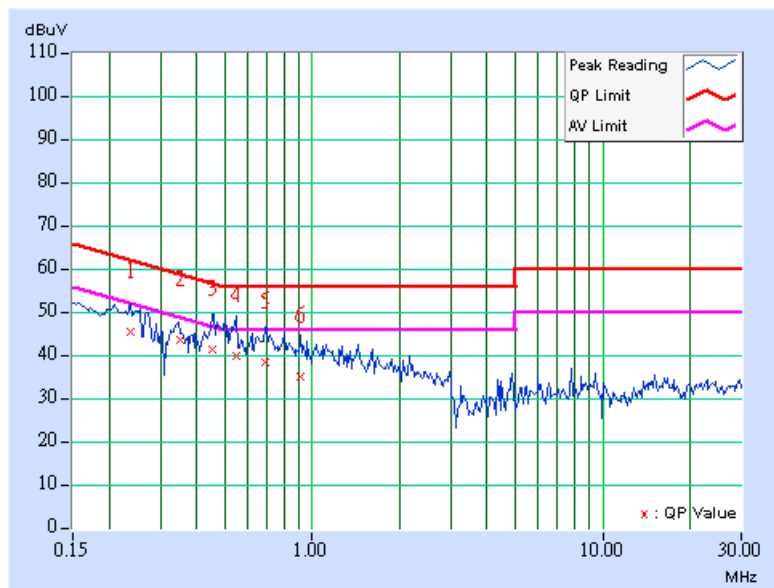





## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594E	3710A04861	Sep. 23, 2005
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 29, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	Aug 06, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2005
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2005
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jun. 16, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Tunable Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	Jul. 15, 2005
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 15, 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Jul. 15, 2005
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB




#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

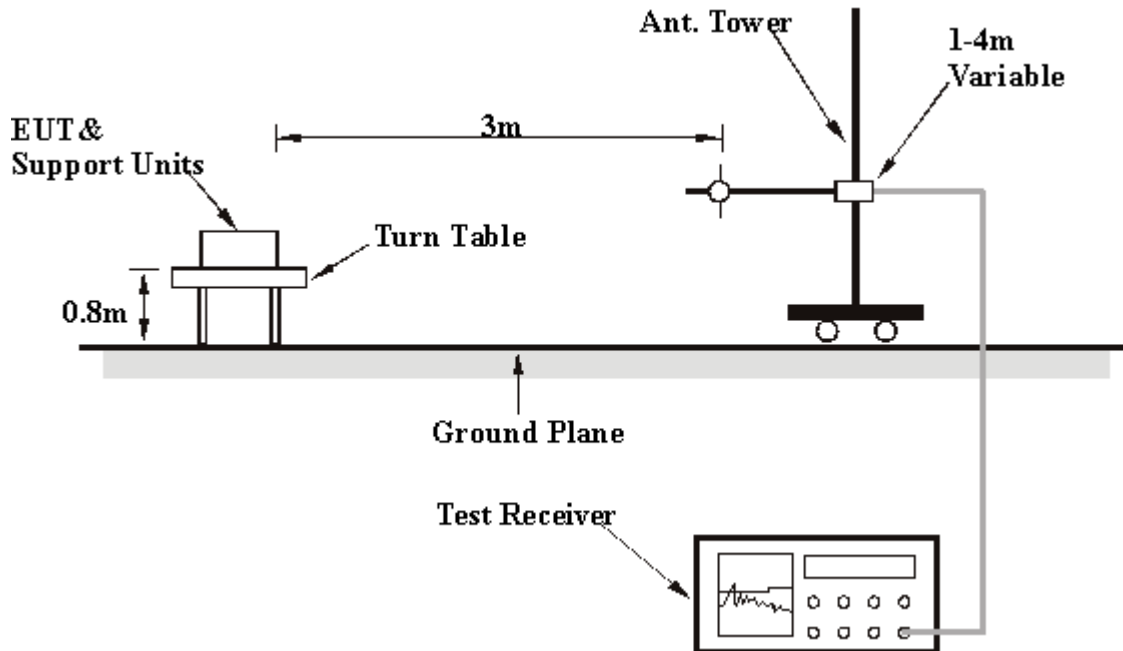

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

## 4.2.6 TEST RESULTS (MODE 1)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	16 deg. C, 73%RH, 985 hPa	<b>TESTED BY</b>	Rex Huang

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.62	25.90 QP	40.00	-14.10	2.20 H	120	19.60	6.30
2	119.97	29.00 QP	43.50	-14.50	2.12 H	123	17.10	11.90
3	133.24	31.90 QP	43.50	-11.60	1.88 H	289	19.90	12.00
4	166.57	41.50 QP	43.50	-2.00	1.97 H	125	31.20	10.30
5	200.00	34.80 QP	43.50	-8.70	1.69 H	324	24.60	10.20
6	239.97	30.00 QP	46.00	-16.00	1.61 H	254	17.10	12.90
7	299.94	41.80 QP	46.00	-4.20	1.28 H	76	26.00	15.80
8	360.00	39.10 QP	46.00	-6.90	1.13 H	33	22.00	17.10
9	533.39	33.40 QP	46.00	-12.60	1.49 H	268	11.30	22.10
10	688.12	41.70 QP	46.00	-4.30	1.16 H	240	17.70	24.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.46	25.40 QP	40.00	-14.60	1.00 V	38	19.10	6.30
2	120.00	26.90 QP	43.50	-16.60	1.00 V	193	15.00	11.90
3	166.25	34.30 QP	43.50	-9.20	1.00 V	156	23.90	10.30
4	240.03	23.40 QP	46.00	-22.60	1.06 V	207	10.50	12.90
5	299.99	31.30 QP	46.00	-14.70	1.58 V	157	15.50	15.80
6	360.00	26.00 QP	46.00	-20.00	1.29 V	58	8.90	17.10
7	432.06	32.00 QP	46.00	-14.00	1.13 V	164	12.80	19.20
8	533.18	33.80 QP	46.00	-12.20	1.42 V	129	11.60	22.10
9	688.12	38.60 QP	46.00	-7.40	1.09 V	47	14.60	24.00
10	800.02	31.40 QP	46.00	-14.60	1.74 V	87	5.80	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



## 4.2.7 TEST RESULTS (MODE 1 - ANTENNA 2 – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	43.20 PK	74.00	-30.80	1.52 H	21	12.60	30.60
1	2360.00	35.40 AV	54.00	-18.60	1.52 H	21	4.80	30.60
2	2390.00	49.30 PK	74.00	-24.70	1.02 H	23	15.50	33.80
2	2390.00	37.80 AV	54.00	-16.20	1.02 H	23	4.00	33.80
3	*2412.00	105.00 PK			1.15 H	10	75.10	29.90
3	*2412.00	98.30 AV			1.15 H	10	68.40	29.90
4	3216.00	53.90 PK	74.00	-20.10	1.11 H	24	21.70	32.20
4	3216.00	44.30 AV	54.00	-9.70	1.11 H	24	12.10	32.20
5	4824.00	45.50 PK	74.00	-28.50	1.02 H	24	9.30	36.20
5	4824.00	33.70 AV	54.00	-20.30	1.02 H	24	-2.50	36.20
6	7236.00	52.70 PK	74.00	-21.30	1.00 H	254	11.00	41.70
6	7236.00	42.40 AV	54.00	-11.60	1.00 H	254	0.70	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	57.90 PK	74.00	-16.10	1.54 V	23	27.30	30.60
1	2360.00	49.30 AV	54.00	-4.70	1.54 V	23	18.70	30.60
2	2390.00	59.40 PK	74.00	-14.60	1.50 V	9	25.60	33.80
2	2390.00	47.60 AV	54.00	-6.40	1.50 V	9	13.80	33.80
3	*2412.00	115.10 PK			1.50 V	9	85.20	29.90
3	*2412.00	108.10 AV			1.50 V	9	78.20	29.90
4	3216.00	52.10 PK	74.00	-21.90	1.09 V	56	19.90	32.20
4	3216.00	46.40 AV	54.00	-7.60	1.09 V	56	14.20	32.20
5	4824.00	45.90 PK	74.00	-28.10	1.30 V	247	9.70	36.20
5	4824.00	34.80 AV	54.00	-19.20	1.30 V	247	-1.40	36.20
6	7236.00	55.00 PK	74.00	-19.00	1.32 V	14	13.30	41.70
6	7236.00	45.50 AV	54.00	-8.50	1.32 V	14	3.80	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.10 PK			1.20 H	25	75.10	30.00
1	*2437.00	98.50 AV			1.20 H	25	68.50	30.00
2	3249.00	53.20 PK	74.00	-20.80	1.32 H	62	20.90	32.30
2	3249.00	43.00 AV	54.00	-11.00	1.32 H	62	10.70	32.30
3	4874.00	50.90 PK	74.00	-23.10	1.02 H	24	14.40	36.50
3	4874.00	40.90 AV	54.00	-13.10	1.02 H	24	4.50	36.50
4	7311.00	45.40 PK	74.00	-28.60	1.11 H	2	3.60	41.80
4	7311.00	35.10 AV	54.00	-18.90	1.11 H	2	-6.70	41.80

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.00 PK			1.49 V	10	84.00	30.00
1	*2437.00	108.20 AV			1.49 V	10	78.20	30.00
2	3249.00	51.40 PK	74.00	-22.60	1.57 V	65	19.10	32.30
2	3249.00	45.60 AV	54.00	-8.40	1.57 V	65	13.30	32.30
3	4874.00	46.40 PK	74.00	-27.60	1.35 V	64	9.90	36.50
3	4874.00	36.10 AV	54.00	-17.90	1.35 V	64	-0.40	36.50
4	7311.00	55.80 PK	74.00	-18.20	1.32 V	6	14.00	41.80
4	7311.00	46.60 AV	54.00	-7.40	1.32 V	6	4.90	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.40 PK			1.21 H	20	74.30	30.10
1	*2462.00	97.30 AV			1.21 H	20	67.20	30.10
2	2483.50	47.80 PK	74.00	-26.20	1.21 H	20	17.70	30.10
2	2483.50	35.00 AV	54.00	-19.00	1.21 H	20	4.90	30.10
3	2499.00	50.00 PK	74.00	-24.00	1.21 H	20	18.90	31.10
3	2499.00	36.60 AV	54.00	-17.40	1.21 H	20	5.50	31.10
4	3282.00	52.50 PK	74.00	-21.50	1.65 H	24	20.10	32.40
4	3282.00	42.30 AV	54.00	-11.70	1.65 H	24	9.90	32.40
5	4924.00	46.20 PK	74.00	-27.80	1.08 H	95	9.50	36.70
5	4924.00	35.90 AV	54.00	-18.10	1.08 H	95	-0.80	36.70
6	7386.00	53.90 PK	74.00	-20.10	1.11 H	24	12.00	41.80
6	7386.00	44.20 AV	54.00	-9.80	1.11 H	24	2.30	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.90 PK			1.44 V	23	82.80	30.10
1	*2462.00	107.00 AV			1.44 V	23	76.90	30.10
2	2483.50	56.30 PK	74.00	-17.70	1.44 V	23	26.20	30.10
2	2483.50	44.70 AV	54.00	-9.30	1.44 V	23	14.60	30.10
3	2499.00	58.50 PK	74.00	-15.50	1.47 V	5	27.40	31.10
3	2499.00	46.30 AV	54.00	-7.70	1.47 V	5	15.20	31.10
4	3282.00	50.90 PK	74.00	-23.10	1.45 V	26	18.50	32.40
4	3282.00	45.10 AV	54.00	-8.90	1.45 V	26	12.70	32.40
5	4924.00	44.20 PK	74.00	-29.80	1.45 V	214	7.50	36.70
5	4924.00	38.10 AV	54.00	-15.90	1.45 V	214	1.40	36.70
6	7386.00	56.60 PK	74.00	-17.40	1.57 V	97	14.70	41.80
6	7386.00	47.00 AV	54.00	-7.00	1.57 V	97	5.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency





## 4.2.8 TEST RESULTS (MODE 1 - ANTENNA 5 – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	54.40 PK	74.00	-19.60	1.42 H	54	23.70	30.60
1	2360.00	47.40 AV	54.00	-6.60	1.42 H	54	16.70	30.60
2	2387.00	60.60 PK	74.00	-13.40	1.00 H	20	27.70	32.90
2	2387.00	50.60 AV	54.00	-3.40	1.00 H	20	17.70	32.90
3	2390.00	57.50 PK	74.00	-16.50	1.00 H	20	23.70	33.80
3	2390.00	48.20 AV	54.00	-5.80	1.00 H	20	14.40	33.80
4	*2412.00	112.10 PK			1.00 H	20	82.20	29.90
4	*2412.00	105.90 AV			1.00 H	20	76.00	29.90
5	3216.00	54.80 PK	74.00	-19.20	1.20 H	21	22.60	32.20
5	3216.00	44.10 AV	54.00	-9.90	1.20 H	21	11.90	32.20
6	4824.00	51.80 PK	74.00	-22.20	1.01 H	74	15.60	36.20
6	4824.00	40.80 AV	54.00	-13.20	1.01 H	74	4.60	36.20
7	7236.00	56.60 PK	74.00	-17.40	1.08 H	24	14.90	41.70
7	7236.00	46.30 AV	54.00	-7.70	1.08 H	24	4.60	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.40 PK	74.00	-25.60	1.32 V	65	17.70	30.60
1	2360.00	42.40 AV	54.00	-11.60	1.32 V	65	11.70	30.60
2	2387.00	55.60 PK	74.00	-18.40	1.08 V	24	22.70	32.90
2	2387.00	44.90 AV	54.00	-9.10	1.08 V	24	12.00	32.90
3	2390.00	52.50 PK	74.00	-21.50	1.12 V	24	18.70	33.80
3	2390.00	42.50 AV	54.00	-11.50	1.12 V	24	8.70	33.80
4	*2412.00	107.10 PK			1.02 V	115	77.20	29.90
4	*2412.00	100.20 AV			1.02 V	115	70.30	29.90
5	3216.00	52.30 PK	74.00	-21.70	1.02 V	24	20.10	32.20
5	3216.00	42.50 AV	54.00	-11.50	1.02 V	24	10.30	32.20
6	4824.00	51.00 PK	74.00	-23.00	1.32 V	6	14.80	36.20
6	4824.00	39.50 AV	54.00	-14.50	1.32 V	6	3.30	36.20
7	7236.00	56.00 PK	74.00	-18.00	1.06 V	74	14.30	41.70
7	7236.00	44.50 AV	54.00	-9.50	1.06 V	74	2.80	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.60 PK			1.01 H	356	82.60	30.00
1	*2437.00	106.20 AV			1.01 H	356	76.20	30.00
2	3249.00	55.70 PK	74.00	-18.30	1.02 H	34	23.40	32.30
2	3249.00	46.80 AV	54.00	-7.20	1.02 H	34	14.50	32.30
3	4874.00	54.10 PK	74.00	-19.90	1.77 H	46	17.70	36.50
3	4874.00	43.90 AV	54.00	-10.10	1.77 H	46	7.40	36.50
4	7311.00	56.20 PK	74.00	-17.80	1.36 H	98	14.40	41.80
4	7311.00	45.70 AV	54.00	-8.30	1.36 H	98	3.90	41.80

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.20 PK			1.36 V	35	77.20	30.00
1	*2437.00	100.30 AV			1.36 V	35	70.30	30.00
2	3249.00	52.20 PK	74.00	-21.80	1.20 V	360	19.90	32.30
2	3249.00	42.70 AV	54.00	-11.30	1.20 V	360	10.40	32.30
3	4874.00	51.90 PK	74.00	-22.10	1.54 V	24	15.40	36.50
3	4874.00	41.30 AV	54.00	-12.70	1.54 V	24	4.80	36.50
4	7311.00	56.10 PK	74.00	-17.90	1.42 V	11	14.30	41.80
4	7311.00	44.70 AV	54.00	-9.30	1.42 V	11	2.90	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.10 PK			1.01 H	350	83.00	30.10
1	*2462.00	106.40 AV			1.01 H	350	76.30	30.10
2	2483.50	57.50 PK	74.00	-16.50	1.01 H	350	27.40	30.10
2	2483.50	46.00 AV	54.00	-8.00	1.01 H	350	15.90	30.10
3	2487.00	59.20 PK	74.00	-14.80	1.01 H	350	29.10	30.10
3	2487.00	48.60 AV	54.00	-5.40	1.01 H	350	18.50	30.10
4	3282.00	54.40 PK	74.00	-19.60	1.45 H	24	22.00	32.40
4	3282.00	45.80 AV	54.00	-8.20	1.45 H	24	13.40	32.40
5	4924.00	53.20 PK	74.00	-20.80	1.08 H	41	16.50	36.70
5	4924.00	42.60 AV	54.00	-11.40	1.08 H	41	5.90	36.70
6	7386.00	55.90 PK	74.00	-18.10	1.45 H	326	14.10	41.80
6	7386.00	45.60 AV	54.00	-8.40	1.45 H	326	3.80	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.10 PK			1.01 V	111	79.00	30.10
1	*2462.00	101.90 AV			1.01 V	111	71.90	30.10
2	2483.50	53.50 PK	74.00	-20.50	1.01 V	111	23.40	30.10
2	2483.50	41.50 AV	54.00	-12.50	1.01 V	111	11.40	30.10
3	2487.00	55.20 PK	74.00	-18.80	1.01 V	111	25.10	30.10
3	2487.00	44.10 AV	54.00	-9.90	1.01 V	111	14.00	30.10
4	3282.00	52.10 PK	74.00	-21.90	1.20 V	356	19.70	32.40
4	3282.00	41.90 AV	54.00	-12.10	1.20 V	356	9.50	32.40
5	4924.00	51.60 PK	74.00	-22.40	1.54 V	7	14.90	36.70
5	4924.00	40.10 AV	54.00	-13.90	1.54 V	7	3.40	36.70
6	7386.00	54.80 PK	74.00	-19.20	1.02 V	24	13.00	41.80
6	7386.00	43.90 AV	54.00	-10.10	1.02 V	24	2.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.9 TEST RESULTS (MODE 1 - ANTENNA 2 – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.80 PK	74.00	-25.20	1.53 H	6	18.20	30.60
1	2360.00	37.90 AV	54.00	-16.10	1.53 H	6	7.30	30.60
2	2390.00	50.00 PK	74.00	-24.00	1.27 H	14	16.20	33.80
2	2390.00	39.10 AV	54.00	-14.90	1.27 H	14	5.30	33.80
3	*2412.00	96.10 PK			1.27 H	14	66.20	29.90
3	*2412.00	88.50 AV			1.27 H	14	58.60	29.90
4	3216.00	54.60 PK	74.00	-19.40	1.24 H	43	22.40	32.20
4	3216.00	45.00 AV	54.00	-9.00	1.24 H	43	12.80	32.20
5	4824.00	42.50 PK	74.00	-31.50	1.02 H	24	6.30	36.20
5	4824.00	32.80 AV	54.00	-21.20	1.02 H	24	-3.40	36.20
6	7236.00	49.90 PK	74.00	-24.10	1.68 H	52	8.20	41.70
6	7236.00	39.60 AV	54.00	-14.40	1.68 H	52	-2.10	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	62.10 PK	74.00	-11.90	1.02 V	21	31.50	30.60
1	2360.00	51.10 AV	54.00	-2.90	1.02 V	21	20.50	30.60
2	2390.00	63.20 PK	74.00	-10.80	1.19 V	14	29.40	33.80
2	2390.00	52.20 AV	54.00	-1.80	1.19 V	14	18.40	33.80
3	*2412.00	109.30 PK			1.19 V	14	79.40	29.90
3	*2412.00	101.60 AV			1.19 V	14	71.70	29.90
4	3216.00	52.30 PK	74.00	-21.70	1.12 V	35	20.10	32.20
4	3216.00	46.80 AV	54.00	-7.20	1.12 V	35	14.60	32.20
5	4824.00	45.30 PK	74.00	-28.70	1.11 V	22	9.10	36.20
5	4824.00	34.90 AV	54.00	-19.10	1.11 V	22	-1.30	36.20
6	7236.00	51.80 PK	74.00	-22.20	1.54 V	24	10.10	41.70
6	7236.00	39.60 AV	54.00	-14.40	1.54 V	24	-2.10	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.70 PK			1.21 H	12	65.80	30.00
1	*2437.00	88.00 AV			1.21 H	12	58.10	30.00
2	3249.00	53.90 PK	74.00	-20.10	1.20 H	50	21.60	32.30
2	3249.00	43.50 AV	54.00	-10.50	1.20 H	50	11.20	32.30
3	4874.00	45.90 PK	74.00	-28.10	1.08 H	24	9.40	36.50
3	4874.00	34.20 AV	54.00	-19.80	1.08 H	24	-2.30	36.50
4	7311.00	52.10 PK	74.00	-21.90	1.47 H	54	10.40	41.80
4	7311.00	40.00 AV	54.00	-14.00	1.47 H	54	-1.70	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.00 PK			1.21 V	15	79.00	30.00
1	*2437.00	101.00 AV			1.21 V	15	71.00	30.00
2	3249.00	51.10 PK	89.00	-37.90	1.12 V	40	18.80	32.30
2	3249.00	54.40 AV	81.00	-26.60	1.12 V	40	22.10	32.30
3	4874.00	47.90 PK	74.00	-26.10	1.32 V	6	11.40	36.50
3	4874.00	35.90 AV	54.00	-18.10	1.32 V	6	-0.50	36.50
4	7311.00	53.70 PK	74.00	-20.30	1.02 V	24	11.90	41.80
4	7311.00	40.70 AV	54.00	-13.30	1.02 V	24	-1.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.60 PK			1.20 H	21	65.50	30.10
1	*2462.00	87.90 AV			1.20 H	21	57.80	30.10
2	2483.50	49.90 PK	74.00	-24.10	1.33 H	163	19.80	30.10
2	2483.50	37.20 AV	54.00	-16.80	1.33 H	163	7.10	30.10
3	3282.00	53.20 PK	74.00	-20.80	1.54 H	241	20.80	32.40
3	3282.00	43.10 AV	54.00	-10.90	1.54 H	241	10.70	32.40
4	4924.00	44.10 PK	74.00	-29.90	1.02 H	47	7.40	36.70
4	4924.00	34.10 AV	54.00	-19.90	1.02 H	47	-2.50	36.70
5	7386.00	51.90 PK	74.00	-22.10	1.57 H	54	10.10	41.80
5	7386.00	40.50 AV	54.00	-13.50	1.57 H	54	-1.40	41.80

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.90 PK			1.19 V	16	77.80	30.10
1	*2462.00	99.50 AV			1.19 V	16	69.40	30.10
2	2483.50	62.20 PK	74.00	-11.80	1.19 V	16	32.10	30.10
2	2483.50	48.80 AV	54.00	-5.20	1.19 V	16	18.70	30.10
3	3282.00	51.80 PK	74.00	-22.20	1.14 V	34	19.40	32.40
3	3282.00	45.70 AV	54.00	-8.30	1.14 V	34	13.30	32.40
4	4924.00	48.10 PK	74.00	-25.90	1.23 V	62	11.40	36.70
4	4924.00	35.60 AV	54.00	-18.40	1.23 V	62	-1.10	36.70
5	7386.00	53.70 PK	74.00	-20.30	1.02 V	2	11.80	41.80
5	7386.00	41.90 AV	54.00	-12.10	1.02 V	2	0.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.10 TEST RESULTS (MODE 1 - ANTENNA 5 – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.80 PK	74.00	-18.20	1.19 H	6	25.20	30.60
1	2360.00	49.40 AV	54.00	-4.60	1.19 H	6	18.80	30.60
2	2390.00	65.10 PK	74.00	-8.90	1.08 H	5	31.30	33.80
2	2390.00	52.60 AV	54.00	-1.40	1.08 H	5	18.80	33.80
3	*2412.00	110.00 PK			1.34 H	359	80.10	29.90
3	*2412.00	101.60 AV			1.34 H	359	71.70	29.90
4	3216.00	55.60 PK	74.00	-18.40	1.27 H	10	23.40	32.20
4	3216.00	47.50 AV	54.00	-6.50	1.27 H	10	15.30	32.20
5	4824.00	49.60 PK	74.00	-24.40	1.09 H	39	13.40	36.20
5	4824.00	38.50 AV	54.00	-15.50	1.09 H	39	2.30	36.20
6	7236.00	55.50 PK	74.00	-18.50	1.03 H	32	13.80	41.70
6	7236.00	44.60 AV	54.00	-9.40	1.03 H	32	2.90	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	51.80 PK	74.00	-22.20	1.36 V	65	21.20	30.60
1	2360.00	44.70 AV	54.00	-9.30	1.36 V	65	14.10	30.60
2	2390.00	55.00 PK	74.00	-19.00	1.07 V	111	21.20	33.80
2	2390.00	44.20 AV	54.00	-9.80	1.07 V	111	10.40	33.80
3	*2412.00	102.20 PK			1.07 V	111	72.30	29.90
3	*2412.00	93.40 AV			1.07 V	111	63.50	29.90
4	3216.00	53.40 PK	74.00	-20.60	1.11 V	24	21.20	32.20
4	3216.00	43.80 AV	54.00	-10.20	1.11 V	24	11.60	32.20
5	4824.00	47.70 PK	74.00	-26.30	1.30 V	82	11.50	36.20
5	4824.00	37.10 AV	54.00	-16.90	1.30 V	82	0.90	36.20
6	7236.00	54.10 PK	74.00	-19.90	1.47 V	45	12.40	41.70
6	7236.00	43.50 AV	54.00	-10.50	1.47 V	45	1.80	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.90 PK			1.54 H	62	79.90	30.00
1	*2437.00	101.50 AV			1.54 H	62	71.50	30.00
2	3249.00	55.70 PK	74.00	-18.30	1.11 H	54	23.40	32.30
2	3249.00	47.80 AV	54.00	-6.20	1.11 H	54	15.50	32.30
3	4824.00	49.00 PK	74.00	-25.00	1.65 H	25	12.80	36.20
3	4824.00	38.20 AV	54.00	-15.80	1.65 H	25	2.00	36.20
4	7311.00	54.90 PK	74.00	-19.10	1.24 H	24	13.10	41.80
4	7311.00	44.00 AV	54.00	-10.00	1.24 H	24	2.20	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.80 PK			1.03 V	112	71.80	30.00
1	*2437.00	93.60 AV			1.03 V	112	63.60	30.00
2	3249.00	53.20 PK	74.00	-20.80	1.09 V	10	20.90	32.30
2	3249.00	43.50 AV	54.00	-10.50	1.09 V	10	11.20	32.30
3	4924.00	47.90 PK	74.00	-26.10	1.17 V	80	11.20	36.70
3	4924.00	36.80 AV	54.00	-17.20	1.17 V	80	0.10	36.70
4	7311.00	53.60 PK	74.00	-20.40	1.21 V	354	11.80	41.80
4	7311.00	43.10 AV	54.00	-10.90	1.21 V	354	1.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency





<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.90 PK			1.26 H	20	79.90	30.10
1	*2462.00	101.30 AV			1.26 H	20	71.20	30.10
2	2483.50	65.00 PK	74.00	-9.00	1.26 H	20	34.90	30.10
2	2483.50	52.10 AV	54.00	-1.90	1.26 H	20	22.00	30.10
3	3282.00	56.10 PK	74.00	-17.90	1.10 H	2	23.70	32.40
3	3282.00	48.00 AV	54.00	-6.00	1.10 H	2	15.60	32.40
4	4924.00	49.30 PK	74.00	-24.70	1.65 H	24	12.60	36.70
4	4924.00	38.40 AV	54.00	-15.60	1.65 H	24	1.70	36.70
5	7386.00	55.10 PK	74.00	-18.90	1.01 H	60	13.30	41.80
5	7386.00	44.70 AV	54.00	-9.30	1.01 H	60	2.90	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.70 PK			1.03 V	115	72.60	30.10
1	*2462.00	94.40 AV			1.03 V	115	64.30	30.10
2	2483.50	55.50 PK	74.00	-18.50	1.03 V	115	25.40	30.10
2	2483.50	45.20 AV	54.00	-8.80	1.03 V	115	15.10	30.10
3	3282.00	53.30 PK	74.00	-20.70	1.01 V	2	20.90	32.40
3	3282.00	43.40 AV	54.00	-10.60	1.01 V	2	11.00	32.40
4	4924.00	49.30 PK	74.00	-24.70	1.52 V	24	12.60	36.70
4	4924.00	38.00 AV	54.00	-16.00	1.52 V	24	1.30	36.70
5	7386.00	54.20 PK	74.00	-19.80	1.20 V	130	12.40	41.80
5	7386.00	43.90 AV	54.00	-10.10	1.20 V	130	2.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency

## 4.2.11 TEST RESULTS (MODE 2)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	16 deg. C, 73%RH, 985 hPa	<b>TESTED BY</b>	Rex Huang

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.65	25.30 QP	40.00	-14.70	2.15 H	187	19.00	6.30
2	119.99	27.90 QP	43.50	-15.60	2.11 H	147	16.00	11.90
3	166.61	40.20 QP	43.50	-3.30	1.79 H	241	29.90	10.30
4	200.03	23.10 QP	43.50	-20.40	1.58 H	287	12.90	10.20
5	240.02	29.10 QP	46.00	-16.90	1.63 H	315	16.20	12.90
6	299.97	40.30 QP	46.00	-5.70	1.19 H	127	24.50	15.80
7	360.03	38.50 QP	46.00	-7.50	1.06 H	72	21.40	17.10
8	688.12	38.80 QP	46.00	-7.20	1.15 H	272	14.80	24.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.62	25.10 QP	40.00	-14.90	1.00 V	169	18.80	6.30
2	120.01	26.20 QP	43.50	-17.30	1.00 V	151	14.30	11.90
3	166.38	32.00 QP	43.50	-11.50	1.00 V	78	21.70	10.30
4	299.97	30.90 QP	46.00	-15.10	1.49 V	185	15.10	15.80
5	359.97	24.80 QP	46.00	-21.20	1.21 V	77	7.70	17.10
6	533.27	32.10 QP	46.00	-13.90	1.62 V	329	10.00	22.10
7	688.10	36.20 QP	46.00	-9.80	1.15 V	121	12.20	24.00
8	799.99	31.60 QP	46.00	-14.40	1.67 V	18	6.00	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



## 4.2.12 TEST RESULTS (MODE 2 - ANTENNA 2 – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	42.90 PK	74.00	-31.10	1.13 H	332	12.30	30.60
1	2360.00	35.20 AV	54.00	-18.80	1.13 H	332	4.60	30.60
2	2387.00	55.00 PK	74.00	-19.00	1.10 H	328	22.10	32.90
2	2387.00	43.80 AV	54.00	-10.20	1.10 H	328	10.90	32.90
3	2390.00	51.90 PK	74.00	-22.10	1.10 H	328	18.10	33.80
3	2390.00	41.40 AV	54.00	-12.60	1.10 H	328	7.60	33.80
4	*2412.00	106.50 PK			1.10 H	328	76.60	29.90
4	*2412.00	99.10 AV			1.10 H	328	69.20	29.90
5	3216.00	41.30 PK	74.00	-32.70	1.21 H	29	9.10	32.20
5	3216.00	31.20 AV	54.00	-22.80	1.21 H	29	-1.00	32.20
6	4824.00	44.40 PK	74.00	-29.60	1.28 H	9	8.10	36.20
6	4824.00	32.50 AV	54.00	-21.50	1.28 H	9	-3.70	36.20
7	7236.00	51.80 PK	74.00	-22.20	1.58 H	20	10.10	41.70
7	7236.00	41.80 AV	54.00	-12.20	1.58 H	20	0.10	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	57.90 PK	74.00	-16.10	1.28 V	19	27.30	30.60
1	2360.00	48.10 AV	54.00	-5.90	1.28 V	19	17.50	30.60
2	2387.00	61.80 PK	74.00	-12.20	1.31 V	21	28.90	32.90
2	2387.00	50.90 AV	54.00	-3.10	1.31 V	21	18.00	32.90
3	2390.00	58.70 PK	74.00	-15.30	1.31 V	21	24.90	33.80
3	2390.00	48.50 AV	54.00	-5.50	1.31 V	21	14.70	33.80
4	*2412.00	113.30 PK			1.31 V	21	83.40	29.90
4	*2412.00	106.20 AV			1.31 V	21	76.30	29.90
5	3216.00	43.50 PK	74.00	-30.50	1.37 V	330	11.30	32.20
5	3216.00	37.00 AV	54.00	-17.00	1.37 V	330	4.80	32.20
6	4824.00	44.70 PK	74.00	-29.30	1.47 V	119	8.50	36.20
6	4824.00	33.30 AV	54.00	-20.70	1.47 V	119	-3.00	36.20
7	7236.00	53.80 PK	74.00	-20.20	1.00 V	283	12.20	41.70
7	7236.00	44.10 AV	54.00	-9.90	1.00 V	283	2.40	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.80 PK			1.11 H	320	75.80	30.00
1	*2437.00	99.10 AV			1.11 H	320	69.10	30.00
2	3249.00	41.70 PK	74.00	-32.30	1.17 H	32	9.40	32.30
2	3249.00	31.50 AV	54.00	-22.50	1.17 H	32	-0.80	32.30
3	4874.00	44.60 PK	74.00	-29.40	1.31 H	18	8.10	36.50
3	4874.00	33.00 AV	54.00	-21.00	1.31 H	18	-3.50	36.50
4	7311.00	52.10 PK	74.00	-21.90	1.49 H	27	10.40	41.80
4	7311.00	42.20 AV	54.00	-11.80	1.49 H	27	0.50	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.10 PK			1.30 V	12	82.10	30.00
1	*2437.00	105.20 AV			1.30 V	12	75.20	30.00
2	3249.00	43.40 PK	74.00	-30.60	1.42 V	351	11.10	32.30
2	3249.00	37.00 AV	54.00	-17.00	1.42 V	351	4.70	32.30
3	4874.00	44.70 PK	74.00	-29.30	1.51 V	120	8.20	36.50
3	4874.00	33.30 AV	54.00	-20.70	1.51 V	120	-3.20	36.50
4	7311.00	53.70 PK	74.00	-20.30	1.03 V	274	12.00	41.80
4	7311.00	44.00 AV	54.00	-10.00	1.03 V	274	2.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.80 PK			1.05 H	347	75.70	30.10
1	*2462.00	98.80 AV			1.05 H	347	68.70	30.10
2	2483.50	50.20 PK	74.00	-23.80	1.05 H	347	20.10	30.10
2	2483.50	38.40 AV	54.00	-15.60	1.05 H	347	8.30	30.10
3	2487.00	51.90 PK	74.00	-22.10	1.05 H	347	21.80	30.10
3	2487.00	41.00 AV	54.00	-13.00	1.05 H	347	10.90	30.10
4	3282.00	41.90 PK	74.00	-32.10	1.20 H	38	9.50	32.40
4	3282.00	31.90 AV	54.00	-22.10	1.20 H	38	-0.50	32.40
5	4924.00	44.70 PK	74.00	-29.30	1.34 H	13	8.00	36.70
5	4924.00	33.00 AV	54.00	-21.00	1.34 H	13	-3.70	36.70
6	7386.00	52.60 PK	74.00	-21.40	1.62 H	32	10.70	41.80
6	7386.00	42.80 AV	54.00	-11.20	1.62 H	32	0.90	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.20 PK			1.30 V	12	82.10	30.10
1	*2462.00	105.20 AV			1.30 V	12	75.10	30.10
2	2483.50	56.60 PK	74.00	-17.40	1.30 V	12	26.50	30.10
2	2483.50	44.80 AV	54.00	-9.20	1.30 V	12	14.70	30.10
3	2487.00	58.30 PK	74.00	-15.70	1.30 V	12	28.20	30.10
3	2487.00	47.40 AV	54.00	-6.60	1.30 V	12	17.30	30.10
4	3282.00	43.80 PK	74.00	-30.20	1.38 V	343	11.40	32.40
4	3282.00	37.40 AV	54.00	-16.60	1.38 V	343	5.00	32.40
5	4924.00	45.30 PK	74.00	-28.70	1.42 V	125	8.60	36.70
5	4924.00	34.10 AV	54.00	-19.90	1.42 V	125	-2.60	36.70
6	7386.00	53.80 PK	74.00	-20.20	1.07 V	276	11.90	41.80
6	7386.00	44.00 AV	54.00	-10.00	1.07 V	276	2.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.13 TEST RESULTS (MODE 2 - ANTENNA 2 – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.60 PK	74.00	-25.40	1.12 H	4	18.00	30.60
1	2360.00	38.70 AV	54.00	-15.30	1.12 H	4	8.10	30.60
2	2390.00	52.10 PK	74.00	-21.90	1.08 H	345	18.30	33.80
2	2390.00	42.50 AV	54.00	-11.50	1.08 H	345	8.70	33.80
3	*2412.00	101.10 PK			1.08 H	345	71.20	29.90
3	*2412.00	91.50 AV			1.08 H	345	61.60	29.90
4	3216.00	41.90 PK	74.00	-32.10	1.23 H	26	9.70	32.20
4	3216.00	31.90 AV	54.00	-22.10	1.23 H	26	-0.30	32.20
5	4824.00	44.40 PK	74.00	-29.60	1.25 H	60	8.20	36.20
5	4824.00	32.10 AV	54.00	-21.90	1.25 H	60	-4.10	36.20
6	7236.00	48.60 PK	74.00	-25.40	1.08 H	128	7.00	41.70
6	7236.00	38.50 AV	54.00	-15.50	1.08 H	128	-3.10	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	60.30 PK	74.00	-13.70	1.07 V	20	29.70	30.60
1	2360.00	49.20 AV	54.00	-4.80	1.07 V	20	18.60	30.60
2	2390.00	63.90 PK	74.00	-10.10	1.08 V	16	30.10	33.80
2	2390.00	50.80 AV	54.00	-3.20	1.08 V	16	17.00	33.80
3	*2412.00	108.80 PK			1.08 V	16	78.90	29.90
3	*2412.00	99.80 AV			1.08 V	16	69.90	29.90
4	3216.00	44.10 PK	74.00	-29.90	1.36 V	22	11.90	32.20
4	3216.00	37.50 AV	54.00	-16.50	1.36 V	22	5.30	32.20
5	4824.00	43.70 PK	74.00	-30.30	1.10 V	261	7.40	36.20
5	4824.00	32.60 AV	54.00	-21.40	1.10 V	261	-3.60	36.20
6	7236.00	49.40 PK	74.00	-24.60	1.14 V	108	7.80	41.70
6	7236.00	38.20 AV	54.00	-15.80	1.14 V	108	-3.40	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.60 PK			1.03 H	349	70.70	30.00
1	*2437.00	92.40 AV			1.03 H	349	62.40	30.00
2	3249.00	42.40 PK	74.00	-31.60	1.26 H	33	10.10	32.30
2	3249.00	32.40 AV	54.00	-21.60	1.26 H	33	0.10	32.30
3	4874.00	44.30 PK	74.00	-29.70	1.26 H	58	7.80	36.50
3	4874.00	32.80 AV	54.00	-21.20	1.26 H	58	-3.70	36.50
4	7311.00	49.20 PK	74.00	-24.80	1.05 H	131	7.50	41.80
4	7311.00	38.30 AV	54.00	-15.70	1.05 H	131	-3.40	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.00 PK			1.09 V	13	78.10	30.00
1	*2437.00	99.10 AV			1.09 V	13	69.10	30.00
2	3249.00	44.20 PK	74.00	-29.80	1.42 V	21	11.90	32.30
2	3249.00	37.50 AV	54.00	-16.50	1.42 V	21	5.20	32.30
3	4874.00	44.50 PK	74.00	-29.50	1.11 V	264	8.00	36.50
3	4874.00	33.20 AV	54.00	-20.80	1.11 V	264	-3.30	36.50
4	7311.00	49.60 PK	74.00	-24.40	1.19 V	97	7.90	41.80
4	7311.00	38.50 AV	54.00	-15.50	1.19 V	97	-3.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.10 PK			1.33 H	329	71.00	30.10
1	*2462.00	92.50 AV			1.33 H	329	62.40	30.10
2	2483.50	53.90 PK	74.00	-20.10	1.33 H	329	23.80	30.10
2	2483.50	43.30 AV	54.00	-10.70	1.33 H	329	13.20	30.10
3	3282.00	42.50 PK	74.00	-31.50	1.25 H	28	10.10	32.40
3	3282.00	32.60 AV	54.00	-21.40	1.25 H	28	0.20	32.40
4	4924.00	44.20 PK	74.00	-29.80	1.29 H	67	7.50	36.70
4	4924.00	32.80 AV	54.00	-21.20	1.29 H	67	-3.90	36.70
5	7386.00	49.60 PK	74.00	-24.40	1.08 H	130	7.70	41.80
5	7386.00	38.80 AV	54.00	-15.20	1.08 H	130	-3.10	41.80

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.80 PK			1.30 V	11	78.70	30.10
1	*2462.00	99.80 AV			1.30 V	11	69.70	30.10
2	2483.50	61.60 PK	74.00	-12.40	1.30 V	11	31.50	30.10
2	2483.50	50.60 AV	54.00	-3.40	1.30 V	11	20.50	30.10
3	3282.00	44.70 PK	74.00	-29.30	1.39 V	24	12.30	32.40
3	3282.00	38.10 AV	54.00	-15.90	1.39 V	24	5.70	32.40
4	4924.00	44.50 PK	74.00	-29.50	1.15 V	263	7.80	36.70
4	4924.00	33.30 AV	54.00	-20.70	1.15 V	263	-3.40	36.70
5	7386.00	49.70 PK	74.00	-24.30	1.17 V	101	7.80	41.80
5	7386.00	38.70 AV	54.00	-15.30	1.17 V	101	-3.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.14 TEST RESULTS (MODE 3)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	16 deg. C, 73%RH, 985 hPa	<b>TESTED BY</b>	Rex Huang

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.61	24.30 QP	40.00	-15.70	2.17 H	146	18.00	6.30
2	120.00	26.80 QP	43.50	-16.70	2.04 H	137	14.90	11.90
3	166.63	36.90 QP	43.50	-6.60	1.72 H	239	26.60	10.30
4	200.00	22.10 QP	43.50	-21.40	1.63 H	197	11.90	10.20
5	240.00	27.60 QP	46.00	-18.40	1.53 H	328	14.70	12.90
6	299.99	38.70 QP	46.00	-7.30	1.27 H	114	22.90	15.80
7	360.00	20.90 QP	46.00	-25.10	1.04 H	83	3.80	17.10
8	688.12	37.60 QP	46.00	-8.40	1.21 H	243	13.60	24.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.64	24.80 QP	40.00	-15.20	1.00 V	242	18.50	6.30
2	120.04	26.70 QP	43.50	-16.80	1.00 V	314	14.80	11.90
3	166.42	28.60 QP	43.50	-14.90	1.00 V	106	18.30	10.30
4	300.00	29.70 QP	46.00	-16.30	1.24 V	57	13.90	15.80
5	359.99	23.40 QP	46.00	-22.60	1.12 V	84	6.30	17.10
6	533.30	29.40 QP	46.00	-16.60	1.52 V	115	7.20	22.10
7	688.14	37.70 QP	46.00	-8.30	1.07 V	192	13.70	24.00
8	799.98	29.70 QP	46.00	-16.30	1.54 V	263	4.10	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



4.2.15 TEST RESULTS (MODE 3 - ANTENNA 6 – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	56.70 PK	74.00	-17.30	1.31 H	68	26.10	30.60
1	2360.00	48.70 AV	54.00	-5.30	1.31 H	68	18.10	30.60
2	2390.00	58.80 PK	74.00	-15.20	1.36 H	357	25.00	33.80
2	2390.00	46.60 AV	54.00	-7.40	1.36 H	357	12.80	33.80
3	*2412.00	114.50 PK			1.36 H	357	84.60	29.90
3	*2412.00	107.10 AV			1.36 H	357	77.20	29.90
4	3216.00	44.10 PK	74.00	-29.90	1.00 H	56	11.90	32.20
4	3216.00	36.40 AV	54.00	-17.60	1.00 H	56	4.20	32.20
5	4824.00	48.90 PK	74.00	-25.10	1.00 H	56	12.70	36.20
5	4824.00	41.20 AV	54.00	-12.80	1.00 H	56	5.00	36.20
6	7236.00	57.20 PK	74.00	-16.80	1.19 H	24	15.60	41.70
6	7236.00	48.10 AV	54.00	-5.90	1.19 H	24	6.40	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.30 PK	74.00	-25.70	1.26 V	74	17.70	30.60
1	2360.00	38.90 AV	54.00	-15.10	1.26 V	74	8.30	30.60
2	2390.00	51.50 PK	74.00	-22.50	1.04 V	37	17.70	33.80
2	2390.00	40.00 AV	54.00	-14.00	1.04 V	37	6.20	33.80
3	*2412.00	107.20 PK			1.04 V	37	77.30	29.90
3	*2412.00	100.50 AV			1.04 V	37	70.60	29.90
4	3216.00	42.80 PK	74.00	-31.20	1.15 V	14	10.60	32.20
4	3216.00	35.20 AV	54.00	-18.80	1.15 V	14	3.00	32.20
5	4824.00	47.30 PK	74.00	-26.70	1.29 V	1	11.10	36.20
5	4824.00	35.90 AV	54.00	-18.10	1.29 V	1	-0.30	36.20
6	7236.00	55.90 PK	74.00	-18.10	1.21 V	52	14.30	41.70
6	7236.00	47.80 AV	54.00	-6.20	1.21 V	52	6.10	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.90 PK			1.41 H	2	84.90	30.00
1	*2437.00	107.60 AV			1.41 H	2	77.60	30.00
2	3249.00	44.00 PK	74.00	-30.00	1.03 H	61	11.70	32.30
2	3249.00	36.20 AV	54.00	-17.80	1.03 H	61	3.90	32.30
3	4874.00	47.60 PK	74.00	-26.40	1.47 H	25	11.10	36.50
3	4874.00	36.50 AV	54.00	-17.50	1.47 H	25	0.00	36.50
4	7311.00	57.30 PK	74.00	-16.70	1.18 H	29	15.60	41.80
4	7311.00	48.50 AV	54.00	-5.50	1.18 H	29	6.80	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.30 PK			1.06 V	40	77.30	30.00
1	*2437.00	100.50 AV			1.06 V	40	70.50	30.00
2	3249.00	43.30 PK	74.00	-30.70	1.17 V	19	11.00	32.30
2	3249.00	35.50 AV	54.00	-18.50	1.17 V	19	3.20	32.30
3	4874.00	48.00 PK	74.00	-26.00	1.34 V	355	11.50	36.50
3	4874.00	36.80 AV	54.00	-17.20	1.34 V	355	0.30	36.50
4	7311.00	56.30 PK	74.00	-17.70	1.23 V	61	14.60	41.80
4	7311.00	48.00 AV	54.00	-6.00	1.23 V	61	6.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.50 PK			1.34 H	5	84.40	30.10
1	*2462.00	107.20 AV			1.34 H	5	77.10	30.10
2	2483.50	57.90 PK	74.00	-16.10	1.34 H	5	27.80	30.10
2	2483.50	44.90 AV	54.00	-9.10	1.34 H	5	14.80	30.10
3	2499.00	60.10 PK	74.00	-13.90	1.34 H	6	29.00	31.10
3	2499.00	46.50 AV	54.00	-7.50	1.34 H	6	15.40	31.10
4	3282.00	43.90 PK	74.00	-30.10	1.06 H	64	11.50	32.40
4	3282.00	36.10 AV	54.00	-17.90	1.06 H	64	3.70	32.40
5	4924.00	48.10 PK	74.00	-25.90	1.53 H	31	11.40	36.70
5	4924.00	37.00 AV	54.00	-17.00	1.53 H	31	0.30	36.70
6	7386.00	57.30 PK	74.00	-16.70	1.20 H	17	15.40	41.80
6	7386.00	48.60 AV	54.00	-5.40	1.20 H	17	6.70	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.60 PK			1.09 V	43	77.50	30.10
1	*2462.00	100.90 AV			1.09 V	43	70.80	30.10
2	2483.50	51.00 PK	74.00	-23.00	1.09 V	43	20.90	30.10
2	2483.50	38.60 AV	54.00	-15.40	1.09 V	43	8.50	30.10
3	2499.00	53.20 PK	74.00	-20.80	1.10 V	42	22.10	31.10
3	2499.00	40.20 AV	54.00	-13.80	1.10 V	42	9.10	31.10
4	3282.00	42.70 PK	74.00	-31.30	1.12 V	15	10.30	32.40
4	3282.00	34.80 AV	54.00	-19.20	1.12 V	15	2.40	32.40
5	4924.00	48.00 PK	74.00	-26.00	1.28 V	3	11.30	36.70
5	4924.00	36.70 AV	54.00	-17.30	1.28 V	3	0.00	36.70
6	7386.00	55.90 PK	74.00	-18.10	1.17 V	54	14.00	41.80
6	7386.00	48.00 AV	54.00	-6.00	1.17 V	54	6.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



## 4.2.16 TEST RESULTS (MODE 3 - ANTENNA 5 – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	54.70 PK	74.00	-19.30	1.39 H	317	24.10	30.60
1	2360.00	47.50 AV	54.00	-6.50	1.39 H	317	16.90	30.60
2	2387.00	60.80 PK	74.00	-13.20	1.00 H	23	27.90	32.90
2	2387.00	50.90 AV	54.00	-3.10	1.00 H	23	18.00	32.90
3	2390.00	57.70 PK	74.00	-16.30	1.00 H	23	23.90	33.80
3	2390.00	48.50 AV	54.00	-5.50	1.00 H	23	14.70	33.80
4	*2412.00	112.30 PK			1.00 H	23	82.40	29.90
4	*2412.00	106.20 AV			1.00 H	23	76.30	29.90
5	3216.00	54.60 PK	74.00	-19.40	1.24 H	26	22.40	32.20
5	3216.00	45.80 AV	54.00	-8.20	1.24 H	26	13.60	32.20
6	4824.00	42.10 PK	74.00	-31.90	1.13 H	48	5.90	36.20
6	4824.00	41.30 AV	54.00	-12.70	1.13 H	48	5.10	36.20
7	7236.00	56.50 PK	74.00	-17.50	1.59 H	79	14.80	41.70
7	7236.00	45.10 AV	54.00	-8.90	1.59 H	79	3.40	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.60 PK	74.00	-25.40	1.41 V	72	18.00	30.60
1	2360.00	42.50 AV	54.00	-11.50	1.41 V	72	11.90	30.60
2	2387.00	55.80 PK	74.00	-18.20	1.00 V	25	22.90	32.90
2	2387.00	45.10 AV	54.00	-8.90	1.00 V	25	12.20	32.90
3	2390.00	52.70 PK	74.00	-21.30	1.00 V	25	18.90	33.80
3	2390.00	42.70 AV	54.00	-11.30	1.00 V	25	8.90	33.80
4	*2412.00	107.30 PK			1.00 V	25	77.40	29.90
4	*2412.00	100.40 AV			1.00 V	25	70.50	29.90
5	3216.00	52.20 PK	74.00	-21.80	1.05 V	37	20.00	32.20
5	3216.00	42.60 AV	54.00	-11.40	1.05 V	37	10.40	32.20
6	4824.00	50.60 PK	74.00	-23.40	1.37 V	343	14.40	36.20
6	4824.00	39.30 AV	54.00	-14.70	1.37 V	343	3.10	36.20
7	7236.00	55.80 PK	74.00	-18.20	1.12 V	64	14.10	41.70
7	7236.00	44.40 AV	54.00	-9.60	1.12 V	64	2.70	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.50 PK			1.35 H	324	82.50	30.00
1	*2437.00	106.40 AV			1.35 H	324	76.40	30.00
2	3249.00	55.90 PK	74.00	-18.10	1.22 H	36	23.60	32.30
2	3249.00	46.70 AV	54.00	-7.30	1.22 H	36	14.40	32.30
3	4874.00	54.40 PK	74.00	-19.60	1.08 H	57	17.90	36.50
3	4874.00	44.20 AV	54.00	-9.80	1.08 H	57	7.70	36.50
4	7311.00	56.70 PK	74.00	-17.30	1.49 H	65	14.90	41.80
4	7311.00	46.30 AV	54.00	-7.70	1.49 H	65	4.50	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.90 PK			1.42 V	68	77.90	30.00
1	*2437.00	100.90 AV			1.42 V	68	70.90	30.00
2	3249.00	52.40 PK	74.00	-21.60	1.07 V	43	20.10	32.30
2	3249.00	43.10 AV	54.00	-10.90	1.07 V	43	10.80	32.30
3	4874.00	52.10 PK	74.00	-21.90	1.45 V	351	15.60	36.50
3	4874.00	41.60 AV	54.00	-12.40	1.45 V	351	5.10	36.50
4	7311.00	56.30 PK	74.00	-17.70	1.16 V	85	14.50	41.80
4	7311.00	44.80 AV	54.00	-9.20	1.16 V	85	3.00	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.80 PK			1.38 H	321	82.70	30.10
1	*2462.00	106.50 AV			1.38 H	321	76.40	30.10
2	2483.50	57.20 PK	74.00	-16.80	1.38 H	321	27.10	30.10
2	2483.50	46.10 AV	54.00	-7.90	1.38 H	321	16.00	30.10
3	2487.00	58.90 PK	74.00	-15.10	1.38 H	321	28.80	30.10
3	2487.00	48.70 AV	54.00	-5.30	1.38 H	321	18.60	30.10
4	3282.00	55.20 PK	74.00	-18.80	1.28 H	17	22.80	32.40
4	3282.00	46.30 AV	54.00	-7.70	1.28 H	17	13.90	32.40
5	4924.00	54.10 PK	74.00	-19.90	1.09 H	83	17.40	36.70
5	4924.00	43.50 AV	54.00	-10.50	1.09 H	83	6.80	36.70
6	7386.00	55.90 PK	74.00	-18.10	1.53 H	74	14.10	41.80
6	7386.00	46.00 AV	54.00	-8.00	1.53 H	74	4.20	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.10 PK			1.34 V	67	78.00	30.10
1	*2462.00	101.20 AV			1.34 V	67	71.10	30.10
2	2483.50	52.50 PK	74.00	-21.50	1.34 V	67	22.40	30.10
2	2483.50	40.80 AV	54.00	-13.20	1.34 V	67	10.70	30.10
3	2487.00	54.20 PK	74.00	-19.80	1.34 V	67	24.10	30.10
3	2487.00	43.40 AV	54.00	-10.60	1.34 V	67	13.30	30.10
4	3282.00	52.60 PK	74.00	-21.40	1.13 V	52	20.20	32.40
4	3282.00	42.80 AV	54.00	-11.20	1.13 V	52	10.40	32.40
5	4924.00	51.90 PK	74.00	-22.10	1.40 V	345	15.20	36.70
5	4924.00	40.20 AV	54.00	-13.80	1.40 V	345	3.50	36.70
6	7386.00	55.70 PK	74.00	-18.30	1.15 V	77	13.90	41.80
6	7386.00	44.30 AV	54.00	-9.70	1.15 V	77	2.50	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.17 TEST RESULTS (MODE 3 - ANTENNA 6 – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	60.50 PK	74.00	-13.50	1.27 H	71	29.90	30.60
1	2360.00	49.30 AV	54.00	-4.70	1.27 H	71	18.70	30.60
2	2390.00	63.90 PK	74.00	-10.10	1.11 H	346	30.10	33.80
2	2390.00	51.90 AV	54.00	-2.10	1.11 H	346	18.10	33.80
3	*2412.00	110.00 PK			1.11 H	346	80.10	29.90
3	*2412.00	101.30 AV			1.11 H	346	71.40	29.90
4	3216.00	44.60 PK	74.00	-29.40	1.84 H	56	12.40	32.20
4	3216.00	39.90 AV	54.00	-14.10	1.84 H	56	7.70	32.20
5	4824.00	44.20 PK	74.00	-29.80	1.13 H	69	8.00	36.20
5	4824.00	32.80 AV	54.00	-21.20	1.13 H	69	-3.50	36.20
6	7236.00	55.00 PK	74.00	-19.00	1.50 H	26	13.30	41.70
6	7236.00	42.90 AV	54.00	-11.10	1.50 H	26	1.20	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.20 PK	74.00	-25.80	1.23 V	81	17.60	30.60
1	2360.00	38.40 AV	54.00	-15.60	1.23 V	81	7.80	30.60
2	2390.00	53.00 PK	74.00	-21.00	1.04 V	38	19.20	33.80
2	2390.00	40.50 AV	54.00	-13.50	1.04 V	38	6.70	33.80
3	*2412.00	99.10 PK			1.04 V	38	69.20	29.90
3	*2412.00	89.90 AV			1.04 V	38	60.00	29.90
4	3216.00	44.30 PK	74.00	-29.70	1.16 V	6	12.10	32.20
4	3216.00	37.40 AV	54.00	-16.60	1.16 V	6	5.20	32.20
5	4824.00	44.50 PK	74.00	-29.50	1.16 V	22	8.20	36.20
5	4824.00	32.60 AV	54.00	-21.40	1.16 V	22	-3.60	36.20
6	7236.00	53.90 PK	74.00	-20.10	1.17 V	132	12.20	41.70
6	7236.00	42.50 AV	54.00	-11.50	1.17 V	132	0.80	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency





<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.30 PK			1.10 H	351	80.30	30.00
1	*2437.00	101.60 AV			1.10 H	351	71.60	30.00
2	3249.00	45.10 PK	74.00	-28.90	1.52 H	64	12.80	32.30
2	3249.00	40.40 AV	54.00	-13.60	1.52 H	64	8.10	32.30
3	4874.00	44.50 PK	74.00	-29.50	1.16 H	74	8.00	36.50
3	4874.00	33.00 AV	54.00	-21.00	1.16 H	74	-3.50	36.50
4	7311.00	55.30 PK	74.00	-18.70	1.48 H	33	13.60	41.80
4	7311.00	43.20 AV	54.00	-10.80	1.48 H	33	1.50	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.30 PK			1.05 V	41	69.30	30.00
1	*2437.00	90.20 AV			1.05 V	41	60.20	30.00
2	3249.00	44.70 PK	74.00	-29.30	1.00 V	5	12.40	32.30
2	3249.00	38.00 AV	54.00	-16.00	1.00 V	5	5.70	32.30
3	4874.00	44.30 PK	74.00	-29.70	1.19 V	25	7.80	36.50
3	4874.00	31.70 AV	54.00	-22.30	1.19 V	25	-4.80	36.50
4	7311.00	53.60 PK	74.00	-20.40	1.27 V	83	11.90	41.80
4	7311.00	42.20 AV	54.00	-11.80	1.27 V	83	0.50	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.60 PK			1.13 H	354	80.50	30.10
1	*2462.00	101.80 AV			1.13 H	354	71.70	30.10
2	2483.50	64.90 PK	74.00	-9.10	1.13 H	354	34.80	30.10
2	2483.50	51.10 AV	54.00	-2.90	1.13 H	354	21.00	30.10
3	3282.00	44.80 PK	74.00	-29.20	1.73 H	81	12.40	32.40
3	3282.00	40.30 AV	54.00	-13.70	1.73 H	81	7.90	32.40
4	4924.00	45.20 PK	74.00	-28.80	1.15 H	92	8.50	36.70
4	4924.00	33.80 AV	54.00	-20.20	1.15 H	92	-2.90	36.70
5	7386.00	55.80 PK	74.00	-18.20	1.53 H	29	13.90	41.80
5	7386.00	43.90 AV	54.00	-10.10	1.53 H	29	2.00	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.60 PK			1.06 V	39	69.50	30.10
1	*2462.00	90.80 AV			1.06 V	39	60.70	30.10
2	2483.50	53.90 PK	74.00	-20.10	1.06 V	39	23.80	30.10
2	2483.50	40.10 AV	54.00	-13.90	1.06 V	39	10.00	30.10
3	3282.00	44.60 PK	74.00	-29.40	1.17 V	8	12.20	32.40
3	3282.00	38.00 AV	54.00	-16.00	1.17 V	8	5.60	32.40
4	4924.00	44.80 PK	74.00	-29.20	1.22 V	28	8.10	36.70
4	4924.00	33.10 AV	54.00	-20.90	1.22 V	28	-3.60	36.70
5	7386.00	54.40 PK	74.00	-19.60	1.19 V	341	12.50	41.80
5	7386.00	43.00 AV	54.00	-11.00	1.19 V	341	1.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



## 4.2.18 TEST RESULTS (MODE 3 - ANTENNA 5 – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.60 PK	74.00	-18.40	1.14 H	13	25.00	30.60
1	2360.00	49.10 AV	54.00	-4.90	1.14 H	13	18.50	30.60
2	2390.00	65.30 PK	74.00	-8.70	1.51 H	347	31.50	33.80
<b>2</b>	<b>2390.00</b>	<b>52.70 AV</b>	<b>54.00</b>	<b>-1.30</b>	<b>1.51 H</b>	<b>347</b>	<b>18.90</b>	<b>33.80</b>
3	*2412.00	110.20 PK			1.51 H	347	80.30	29.90
3	*2412.00	101.70 AV			1.51 H	347	71.80	29.90
4	3216.00	55.90 PK	74.00	-18.10	1.28 H	24	23.70	32.20
4	3216.00	47.60 AV	54.00	-6.40	1.28 H	24	15.40	32.20
5	4824.00	49.50 PK	74.00	-24.50	1.00 H	69	13.30	36.20
5	4824.00	38.30 AV	54.00	-15.70	1.00 H	69	2.10	36.20
6	7236.00	55.90 PK	74.00	-18.10	1.33 H	46	14.20	41.70
6	7236.00	44.70 AV	54.00	-9.30	1.33 H	46	3.00	41.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.10 PK	74.00	-21.90	1.27 V	29	21.50	30.60
1	2360.00	44.90 AV	54.00	-9.10	1.27 V	29	14.30	30.60
2	2390.00	55.30 PK	74.00	-18.70	1.09 V	86	21.50	33.80
2	2390.00	44.40 AV	54.00	-9.60	1.09 V	86	10.60	33.80
3	*2412.00	102.50 PK			1.09 V	86	72.60	29.90
3	*2412.00	93.60 AV			1.09 V	86	63.70	29.90
4	3216.00	54.10 PK	74.00	-19.90	1.14 V	43	21.90	32.20
4	3216.00	44.20 AV	54.00	-9.80	1.14 V	43	12.00	32.20
5	4824.00	47.50 PK	74.00	-26.50	1.42 V	64	11.30	36.20
5	4824.00	37.20 AV	54.00	-16.80	1.42 V	64	1.00	36.20
6	7236.00	54.60 PK	74.00	-19.40	1.73 V	182	12.90	41.70
6	7236.00	44.10 AV	54.00	-9.90	1.73 V	182	2.40	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.80 PK			1.53 H	352	79.80	30.00
1	*2437.00	101.60 AV			1.53 H	352	71.60	30.00
2	3249.00	55.40 PK	74.00	-18.60	1.35 H	28	23.10	32.30
2	3249.00	47.30 AV	54.00	-6.70	1.35 H	28	15.00	32.30
3	4874.00	50.10 PK	74.00	-23.90	1.14 H	73	13.60	36.50
3	4874.00	38.90 AV	54.00	-15.10	1.14 H	73	2.40	36.50
4	7311.00	55.80 PK	74.00	-18.20	1.41 H	52	14.00	41.80
4	7311.00	44.50 AV	54.00	-9.50	1.41 H	52	2.70	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.10 PK			1.07 V	84	72.10	30.00
1	*2437.00	93.50 AV			1.07 V	84	63.50	30.00
2	3249.00	53.50 PK	74.00	-20.50	1.19 V	56	21.20	32.30
2	3249.00	43.90 AV	54.00	-10.10	1.19 V	56	11.60	32.30
3	4874.00	48.10 PK	74.00	-25.90	1.50 V	79	11.60	36.50
3	4874.00	37.30 AV	54.00	-16.70	1.50 V	79	0.80	36.50
4	7311.00	53.90 PK	74.00	-20.10	1.45 V	341	12.10	41.80
4	7311.00	43.00 AV	54.00	-11.00	1.45 V	341	1.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



<b>EUT</b>	WLAN MINI PCI CARD	<b>MODEL</b>	WN4401C-ZZ
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~25000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Peak (PK) Average (AV) 1 MHz
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 65%RH, 985 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.30 PK			1.52 H	3	80.20	30.10
1	*2462.00	101.80 AV			1.52 H	3	71.70	30.10
2	2483.50	65.40 PK	74.00	-8.60	1.52 H	3	35.30	30.10
2	2483.50	52.60 AV	54.00	-1.40	1.52 H	3	22.50	30.10
3	3282.00	56.30 PK	74.00	-17.70	1.32 H	21	23.90	32.40
3	3282.00	48.50 AV	54.00	-5.50	1.32 H	21	16.10	32.40
4	4924.00	49.20 PK	74.00	-24.80	1.13 H	85	12.50	36.70
4	4924.00	38.50 AV	54.00	-15.50	1.13 H	85	1.80	36.70
5	7386.00	55.60 PK	74.00	-18.40	1.49 H	67	13.80	41.80
5	7386.00	45.10 AV	54.00	-8.90	1.49 H	67	3.30	41.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.30 PK			1.12 V	73	72.20	30.10
1	*2462.00	93.80 AV			1.12 V	73	63.70	30.10
2	2483.50	55.10 PK	74.00	-18.90	1.12 V	73	25.00	30.10
2	2483.50	44.60 AV	54.00	-9.40	1.12 V	73	14.50	30.10
3	3282.00	53.70 PK	74.00	-20.30	1.26 V	71	21.30	32.40
3	3282.00	43.90 AV	54.00	-10.10	1.26 V	71	11.50	32.40
4	4924.00	50.00 PK	74.00	-24.00	1.48 V	54	13.30	36.70
4	4924.00	38.60 AV	54.00	-15.40	1.48 V	54	1.90	36.70
5	7386.00	55.10 PK	74.00	-18.90	1.62 V	353	13.30	41.80
5	7386.00	44.50 AV	54.00	-9.50	1.62 V	353	2.70	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



## 4.3.6 TEST RESULTS (MAIN Antenna Connector – DSSS)


<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	12.15	0.5	PASS
6	2437	11.20	0.5	PASS
11	2462	10.70	0.5	PASS






CH1

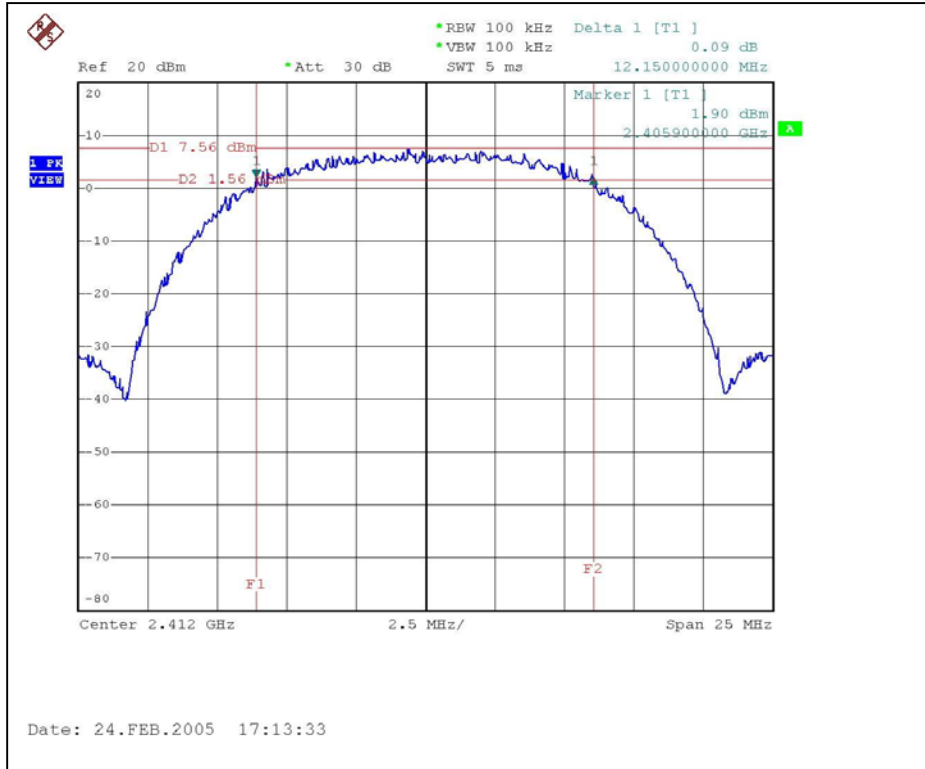


CH6

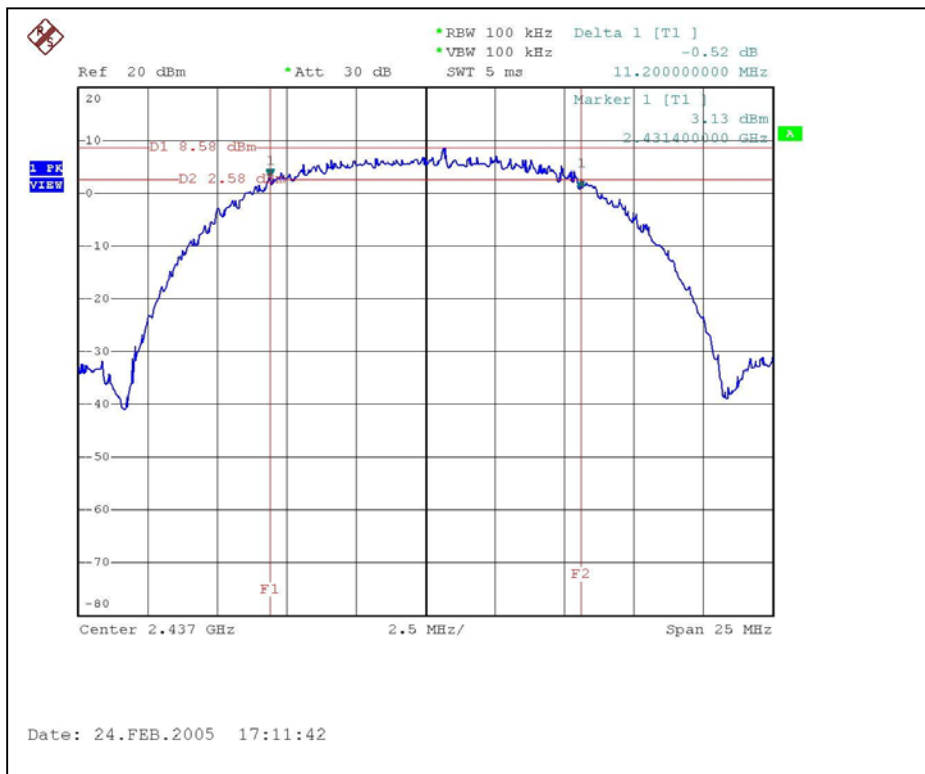



CH11

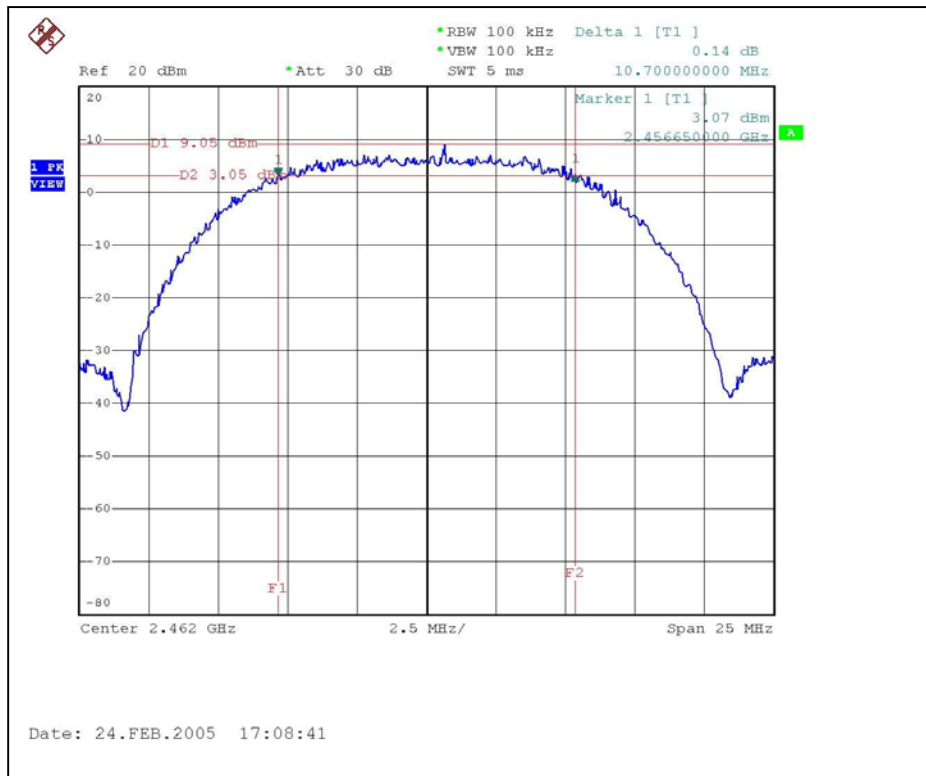




## 4.3.7 TEST RESULTS (MAIN Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.50	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.40	0.5	PASS



CH1

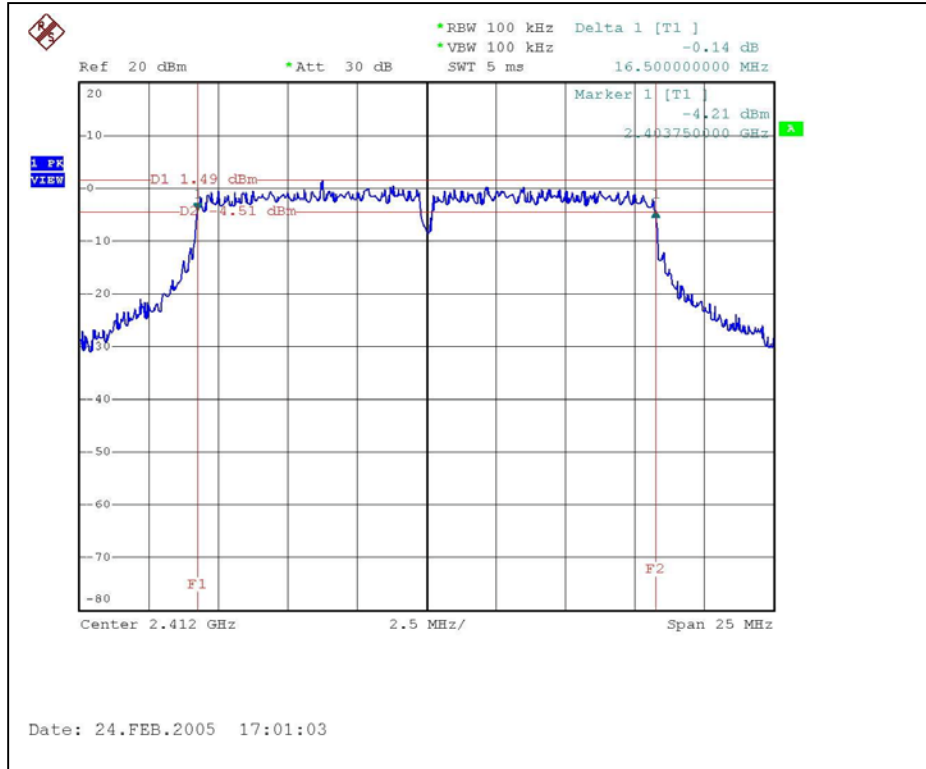


CH6

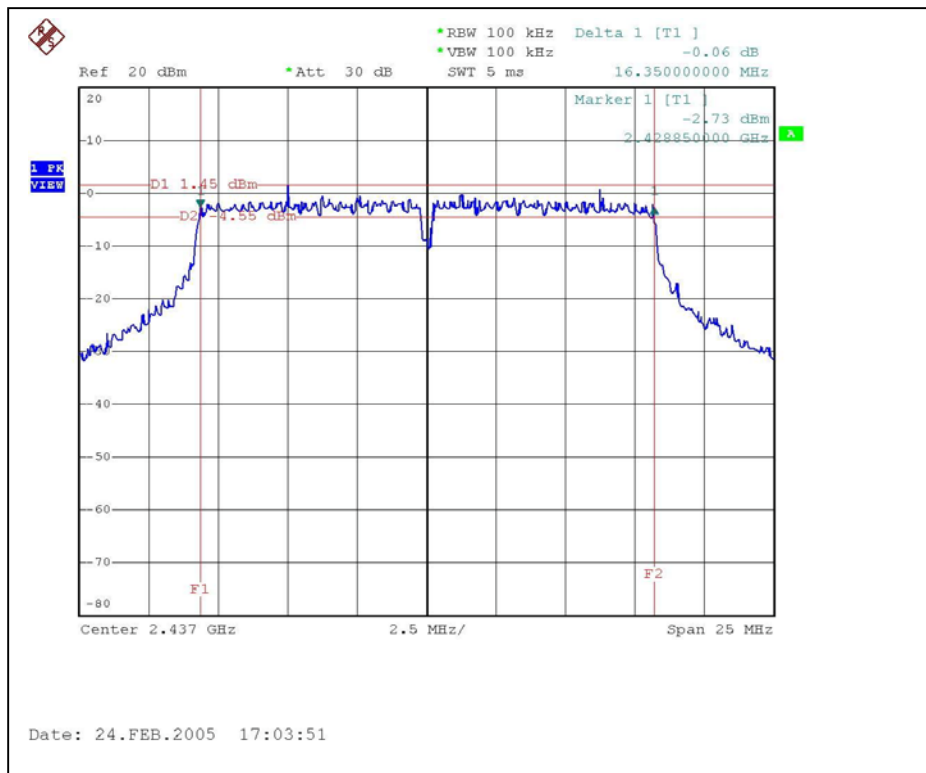



CH11

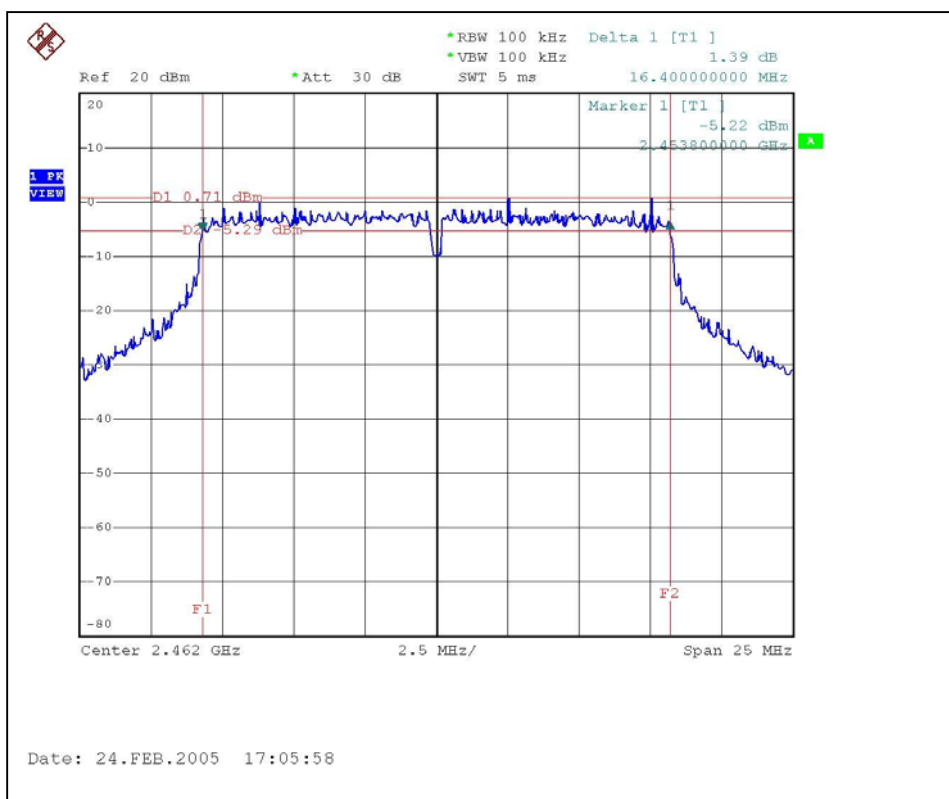




## 4.3.8 TEST RESULTS (AUX Antenna Connector – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	11.8	0.5	PASS
6	2437	12.0	0.5	PASS
11	2462	12.5	0.5	PASS



CH1

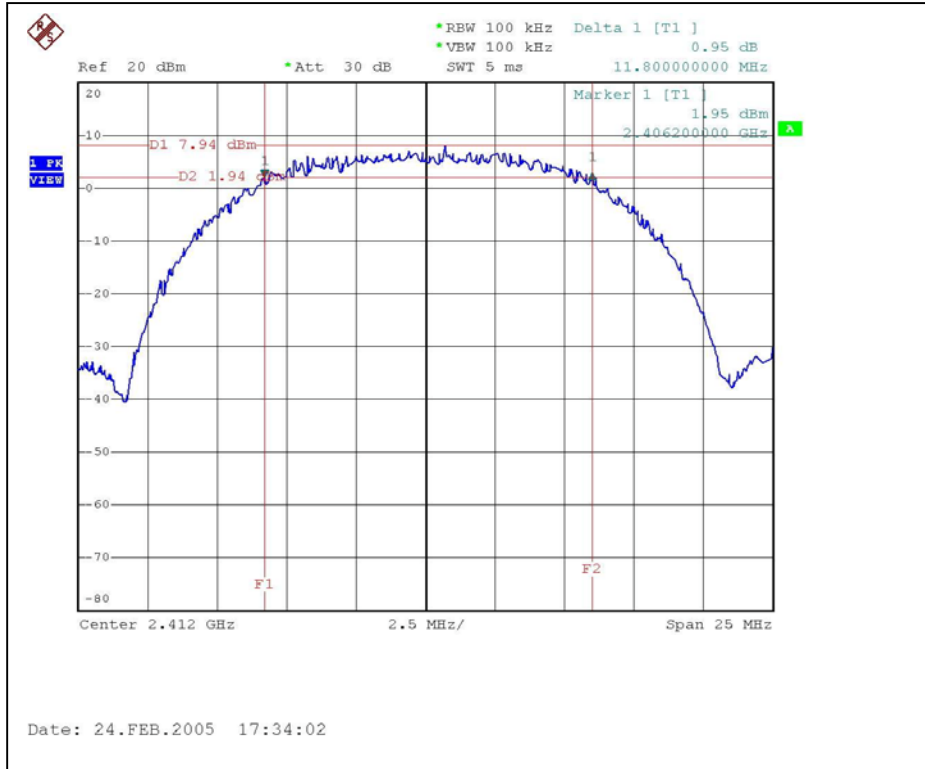


CH6

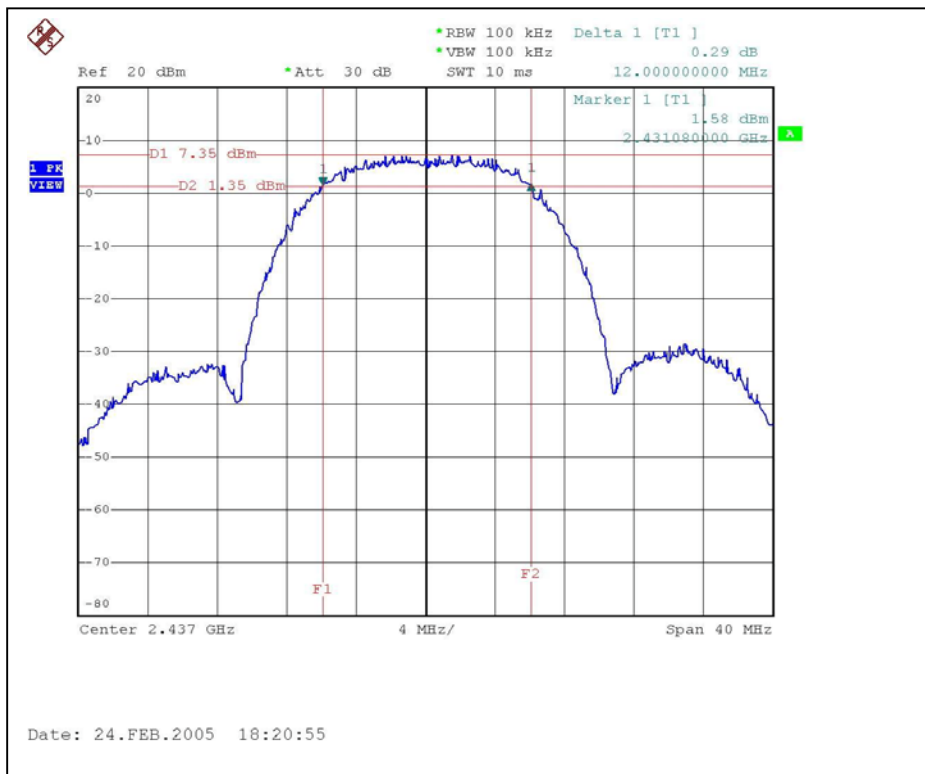



CH11

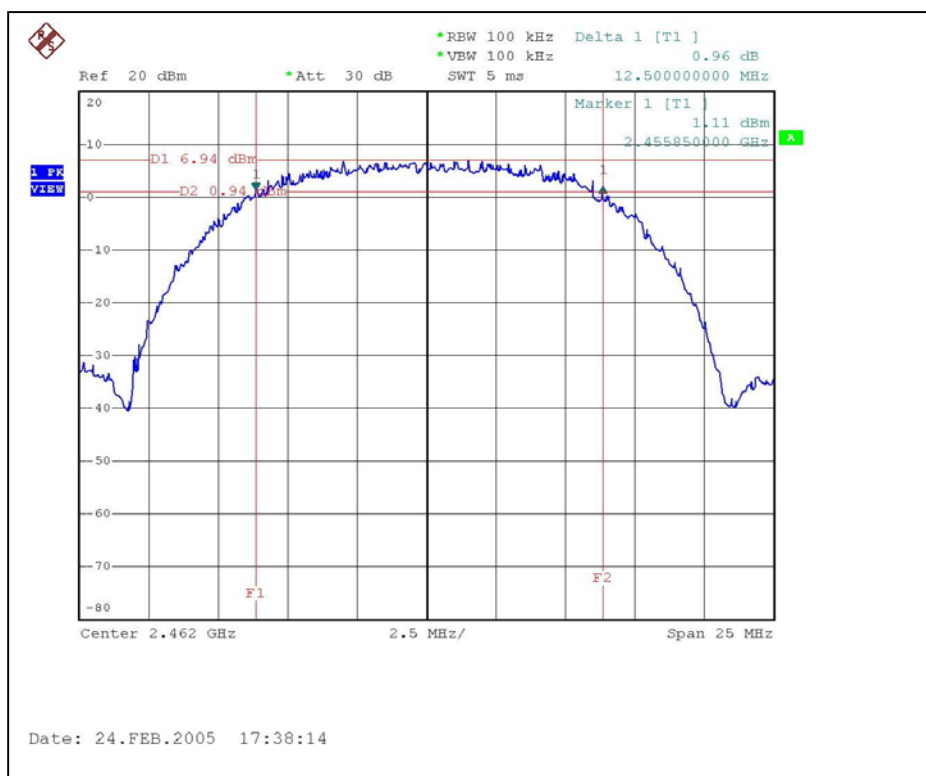






## 4.3.9 TEST RESULTS (AUX Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.45	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.50	0.5	PASS



CH1

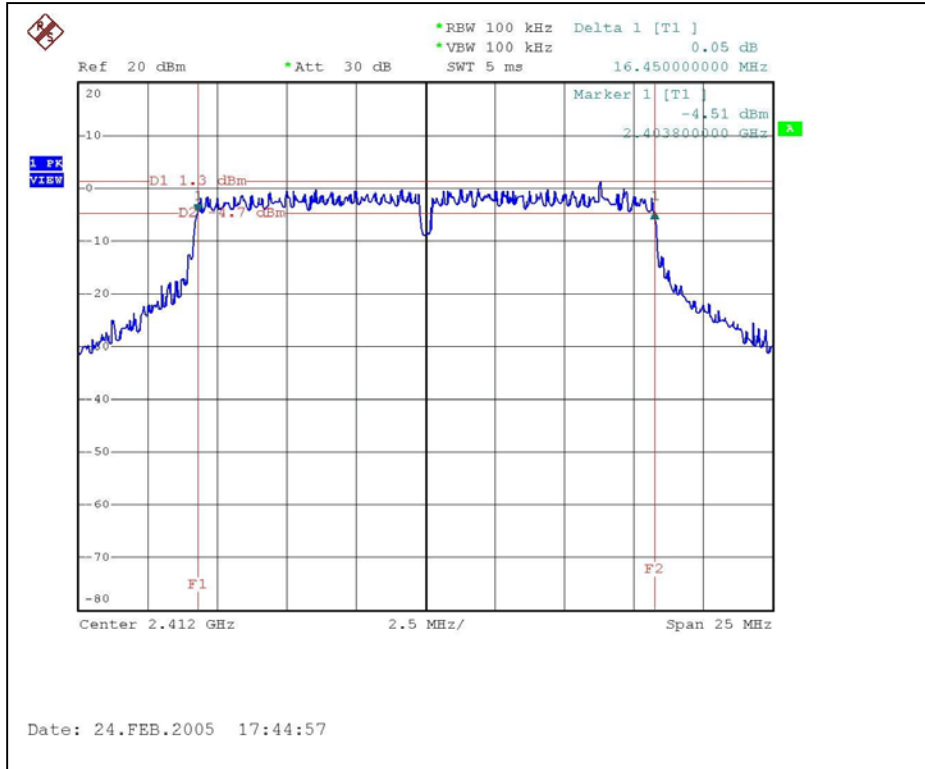


CH6

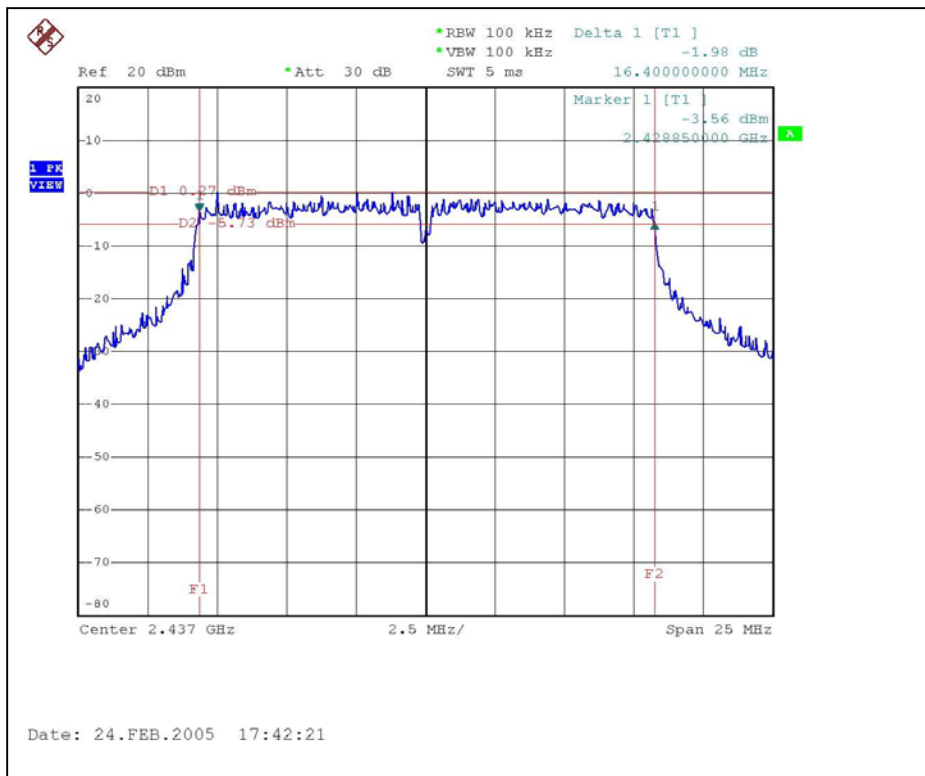



CH11

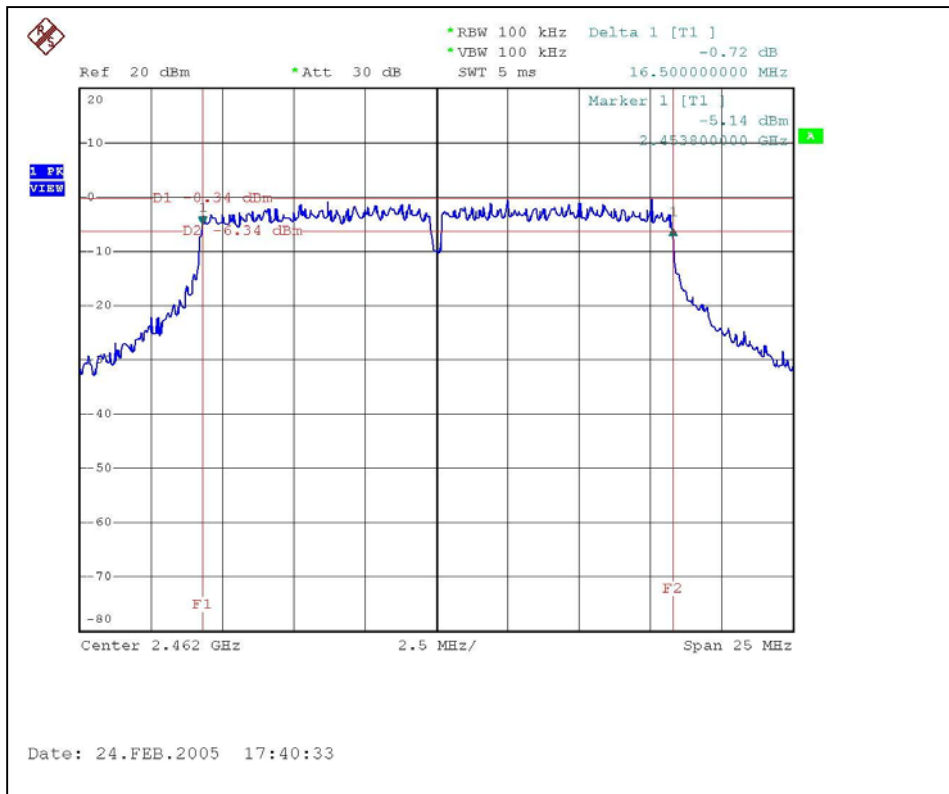



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005
Agilent SIGNAL GENERATOR	E8257C	MY43321031	May. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	B027241	Jun. 30, 2005
NARDA DETECTOR	4503A	FSCM99899	NA


**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 4.4.4 TEST SETUP

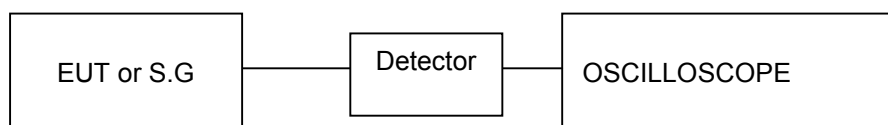

#### 4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS (MAIN Antenna Connector – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.0	30	PASS
6	2437	20.9	30	PASS
11	2462	20.8	30	PASS

4.4.7 TEST RESULTS (MAIN Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.3	30	PASS
6	2437	20.9	30	PASS
11	2462	20.5	30	PASS



4.4.8 TEST RESULTS (AUX Antenna Connector – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20.7	30	PASS
6	2437	20.74	30	PASS
11	2462	20.8	30	PASS

4.4.9 TEST RESULTS (AUX Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	21.0	30	PASS
6	2437	20.8	30	PASS
11	2462	20.5	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

**NOTE:**


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 TEST SETUP

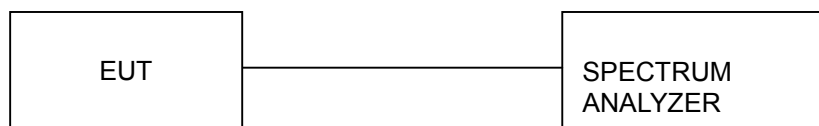

#### 4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




## 4.5.6 TEST RESULTS (MAIN Antenna Connector – DSSS)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-6.83	8	PASS
6	2437	-6.30	8	PASS
11	2462	-6.76	8	PASS



CH1

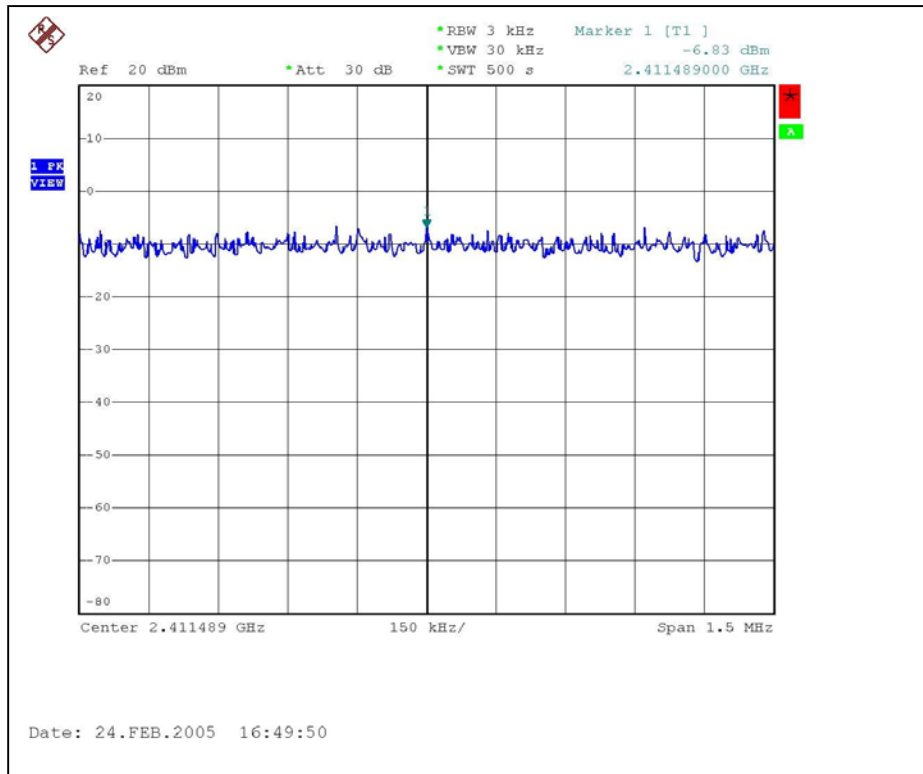


CH6

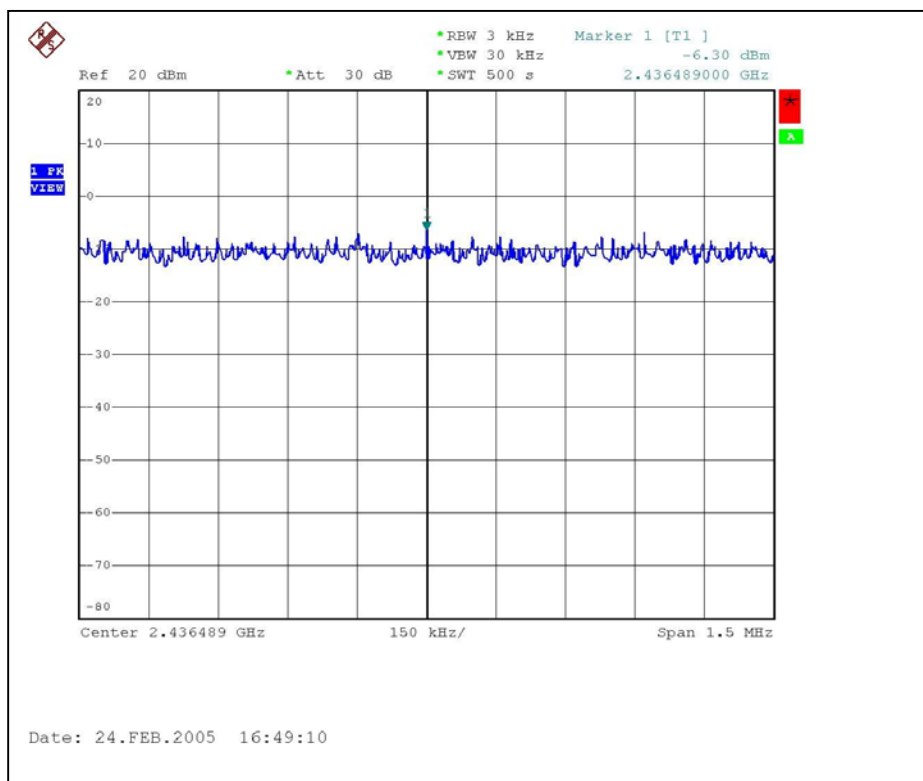



CH11

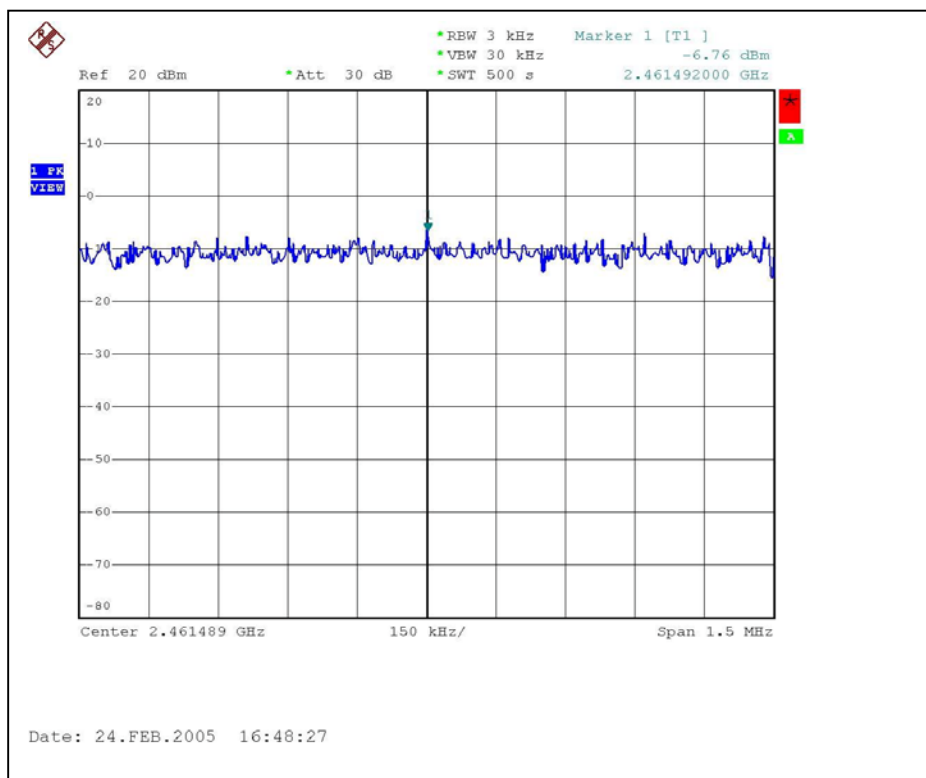




## 4.5.7 TEST RESULTS (MAIN Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-10.79	8	PASS
6	2437	-11.31	8	PASS
11	2462	-11.68	8	PASS



CH1

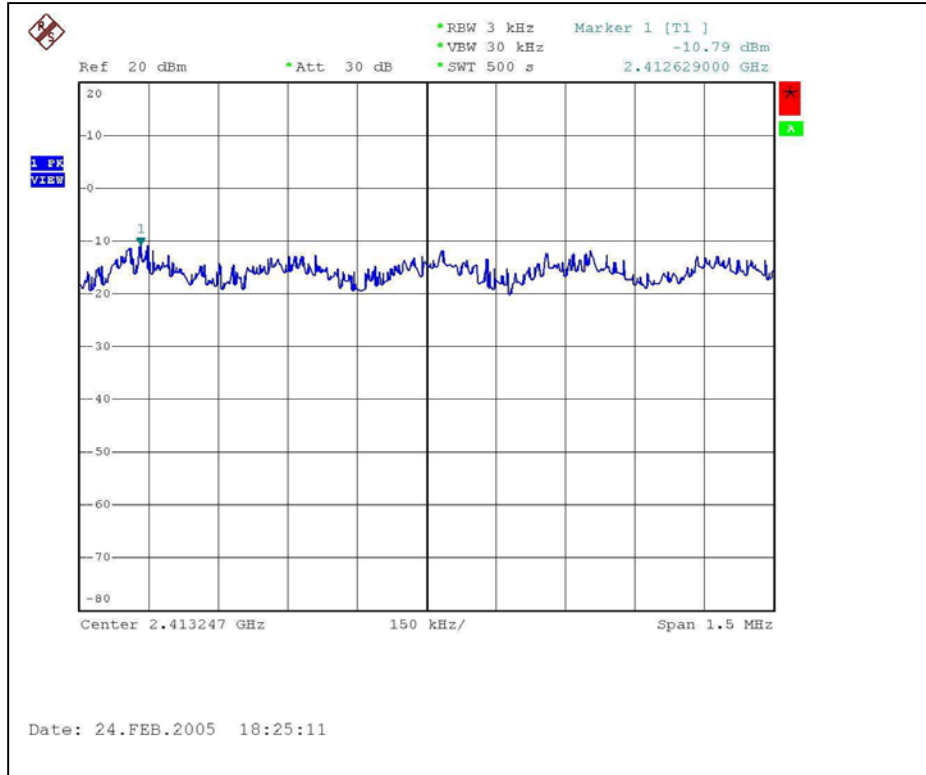


CH6

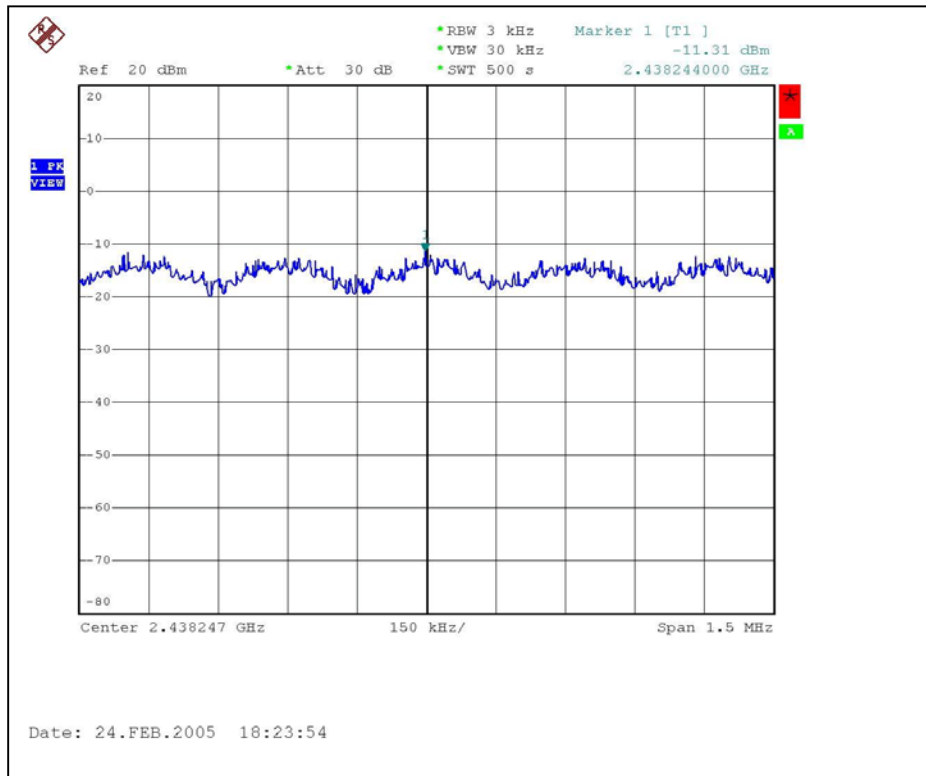



CH11

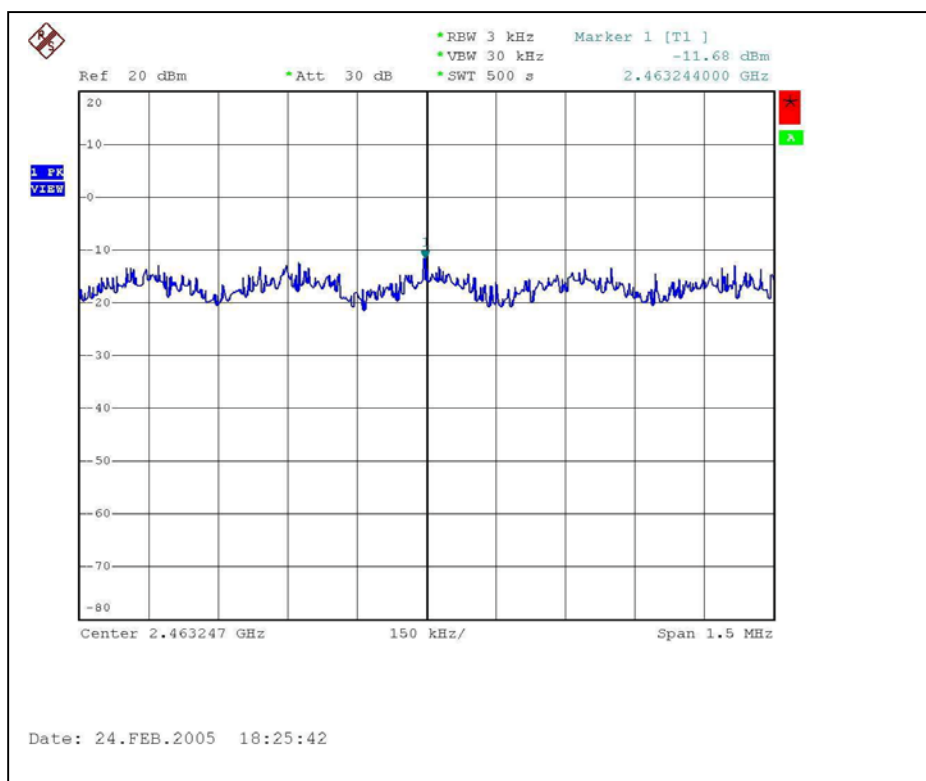



## 4.5.8 TEST RESULTS (AUX Antenna Connector – DSSS)


<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-6.73	8	PASS
6	2437	-6.80	8	PASS
11	2462	-6.06	8	PASS






CH1

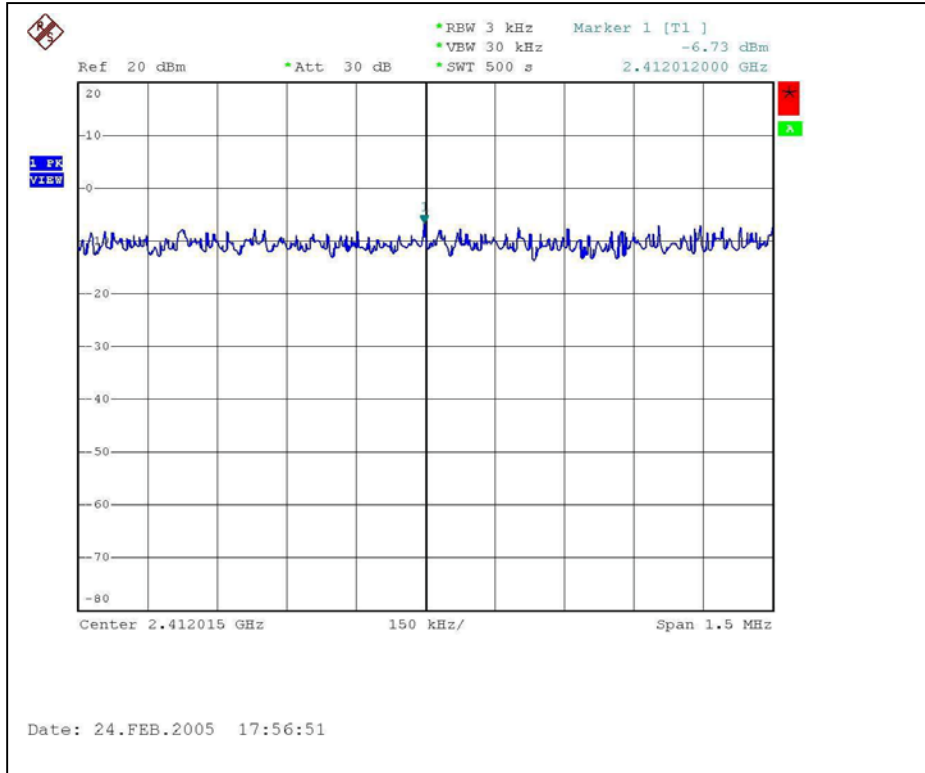


CH6

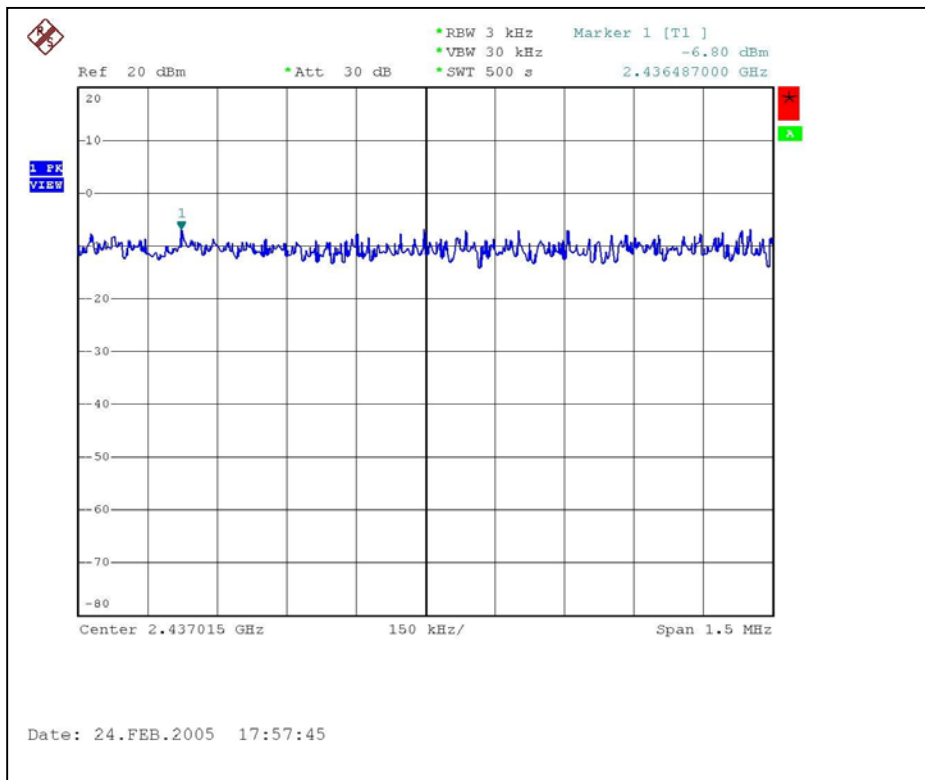



CH11

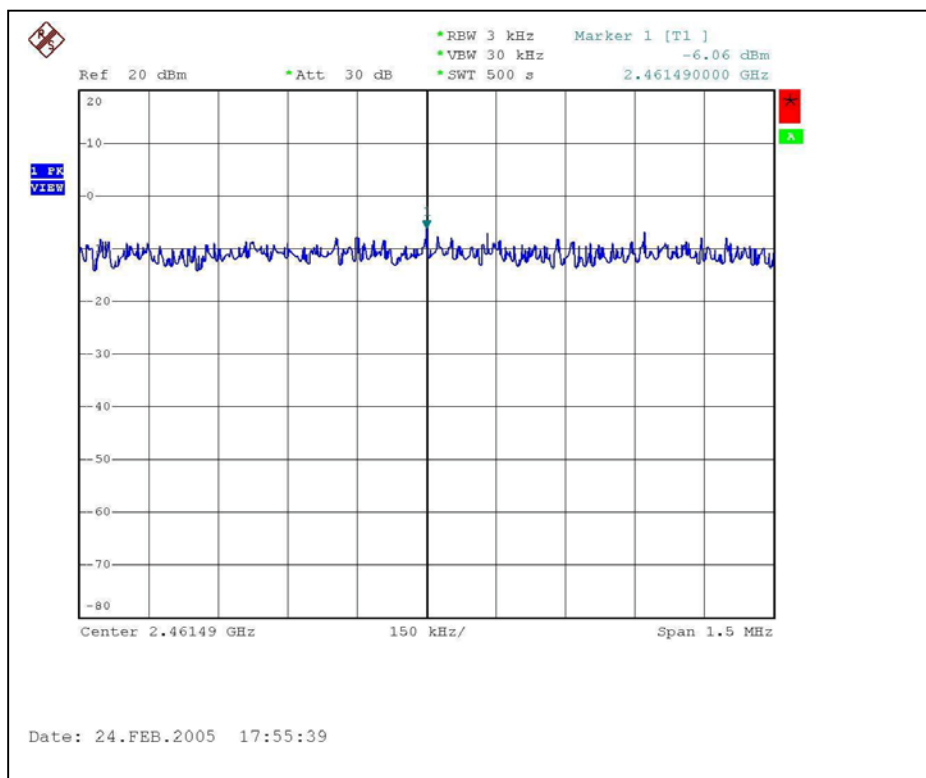




## 4.5.9 TEST RESULTS (AUX Antenna Connector – OFDM)

<b>EUT</b>	WLAN MINI PCI CARD		
<b>MODEL</b>	WN4401C-ZZ	<b>ENVIRONMENTAL CONDITIONS</b>	14 deg. C, 72%RH, 985 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Sky Liao


<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-11.86	8	PASS
6	2437	-11.32	8	PASS
11	2462	-12.09	8	PASS



CH1

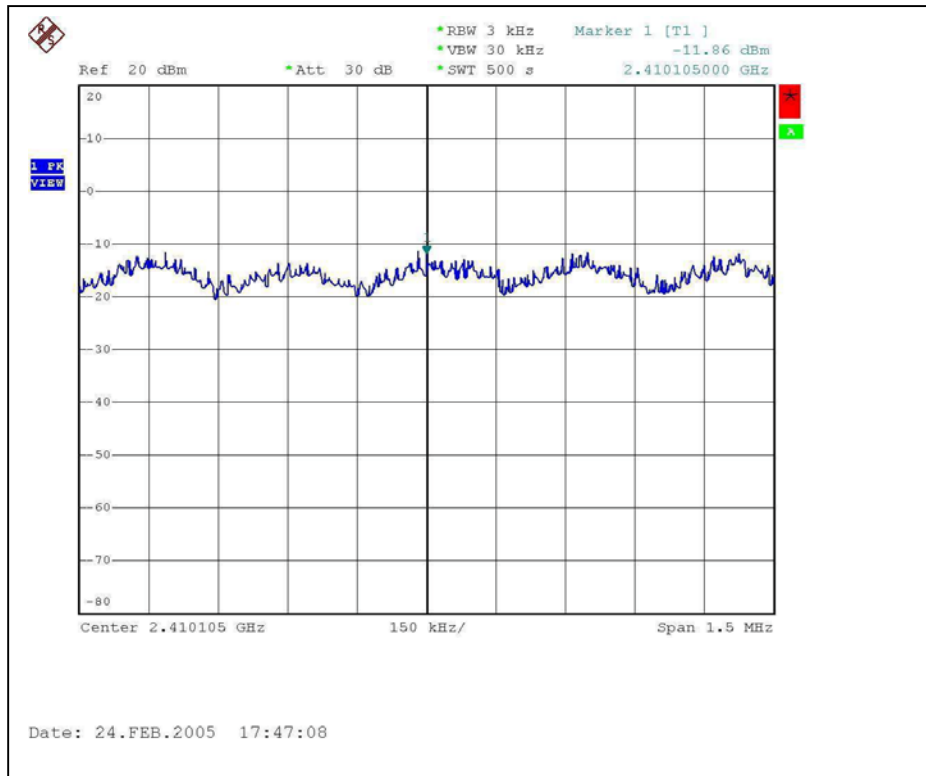

CH6

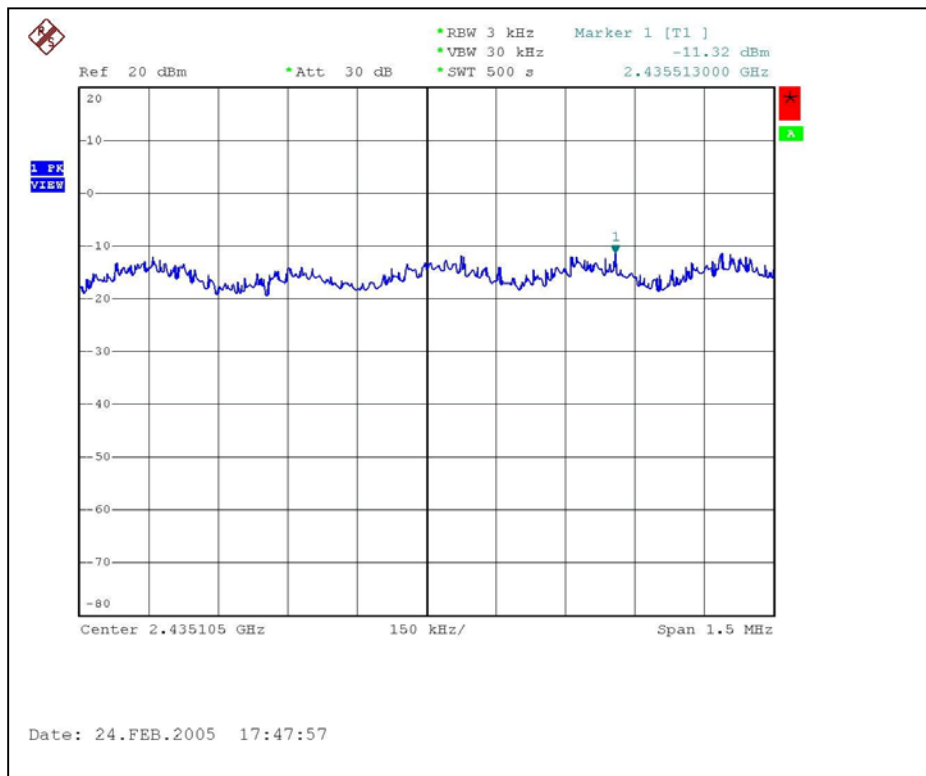



CH11

