



# FCC TEST REPORT

**REPORT NO.:** RF920725H02

**MODEL NO.:** WN4402A

**RECEIVED:** Jul. 25, 2003

**TESTED:** Aug. 02 to Sep. 08, 2003

**APPLICANT:** Arcadyan Technology Corporation

**ADDRESS:** 4F, No. 9, Park Avenue II, Science-based  
Industrial Park, Hsinchu 300, Taiwan, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien,  
Taiwan, R.O.C.

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0

## Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST SETUP .....	10
4.1.4	EUT OPERATING CONDITIONS .....	11
4.1.5	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT .....	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
4.2.2	TEST INSTRUMENTS .....	15
4.2.3	TEST PROCEDURES .....	16
4.2.4	TEST SETUP .....	17
4.2.5	EUT OPERATING CONDITIONS .....	17
4.2.6	TEST RESULTS (A).....	18
4.2.7	TEST RESULTS (A) - DSSS .....	19
4.2.8	TEST RESULTS (A) -OFDM.....	22
4.2.9	TEST RESULTS (B).....	25
4.2.10	TEST RESULTS (B) - DSSS .....	26
4.2.11	TEST RESULTS (B) -OFDM.....	29
4.3	6dB BANDWIDTH MEASUREMENT .....	32
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	32
4.3.2	TEST INSTRUMENTS .....	32
4.3.3	TEST PROCEDURE .....	33
4.3.4	TEST SETUP .....	33
4.3.5	EUT OPERATING CONDITIONS .....	33
4.3.6	TEST RESULTS-DSSS .....	34
4.3.7	TEST RESULTS-OFDM .....	38
4.4	MAXIMUM PEAK OUTPUT POWER .....	42



4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	42
4.4.2	TEST INSTRUMENTS .....	42
4.4.3	TEST PROCEDURES .....	43
4.4.4	TEST SETUP .....	43
4.4.5	EUT OPERATING CONDITIONS .....	43
4.4.6	TEST RESULTS-DSSS .....	44
4.4.7	TEST RESULTS-OFDM .....	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	45
4.5.2	TEST INSTRUMENTS .....	45
4.5.3	TEST PROCEDURE .....	46
4.5.4	TEST SETUP .....	46
4.5.5	EUT OPERATING CONDITIONS .....	46
4.5.6	TEST RESULTS-DSSS .....	47
4.5.7	TEST RESULTS-OFDM .....	51
4.6	BAND EDGES MEASUREMENT.....	55
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	55
4.6.2	TEST INSTRUMENTS .....	55
4.6.3	TEST PROCEDURE .....	55
4.6.4	EUT OPERATING CONDITION.....	55
4.6.5	TEST RESULTS - DSSS.....	56
4.6.6	TEST RESULTS-OFDM .....	59
4.7	ANTENNA REQUIREMENT.....	62
4.7.1	STANDARD APPLICABLE.....	62
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	62
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	63
6	INFORMATION ON THE TESTING LABORATORIES.....	66



## 1 CERTIFICATION

**PRODUCT :** Wireless miniPCI 802.11 g/b adapter  
**BRAND NAME :** Arcadyan  
**MODEL NO. :** WN4402A  
**APPLICANT :** Arcadyan Technology Corporation  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Aug. 02 to Sep. 08, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Amanda Chu, **DATE:** Sep. 09, 2003  
( Amanda Chu )

**APPROVED BY:** Eric Lin, **DATE:** Sep. 09, 2003  
( Eric Lin, Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -13.16 dBuV at 0.177 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.6 dBuV at 66.78MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless miniPCI 802.11 g/b adapter
<b>MODEL NO.</b>	WN4402A
<b>POWER SUPPLY</b>	3.3VDC from host equipment
<b>MODULATION TYPE</b>	CCK, OFDM, DBPSK, DQPSK
<b>RADIO TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	18.39dBm
<b>ANTENNA TYPE</b>	PIFA Antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Mini-PCI
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. There are six types of antennas provided to this EUT, please refer to the following table:

<b>No.</b>	<b>Model No.</b>	<b>Gain (dBi)</b>	<b>Brand</b>	<b>Antenna Type / Connector</b>
1	Mitac Apollo	-2.16dBi	Mitac	PIFA Antenna / with MMCX connector
2	Mitac Apollo MMCX	-3.34dBi		
3	Mitac Athena	0.35dBi		
4	Mitac Athena MMCX	0.02dBi		
5	Mitac Persues	-0.54dBi		
6	Mitac GP3(RD1)	1.07dBi		

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
4. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Test result (A) is for antenna 2, test result (B) is for antenna 6, which were mentioned on section 3.1.
4. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless miniPCI 802.11 g/b adapter . According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**47 CFR Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-1A3-1999	FCC DoC
2	Matrix Printer	EPSON	LQ-300+	DCGY017079	FCC DoC
3	MODEM	ACEEX	1414	0206026775	IFAXDM1414

No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.3 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

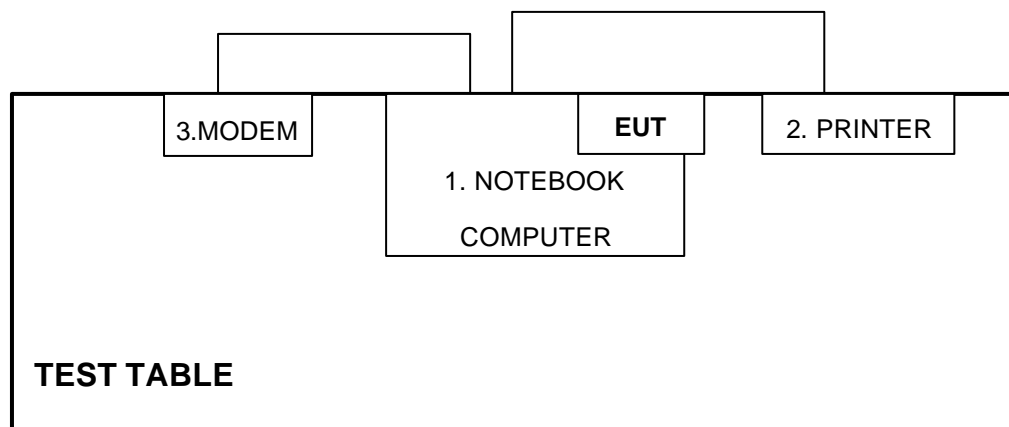

**NOTE:** 1. Please refer to the photos of test configuration in Item 5 also.

## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### NOTE

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

### 3. TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.3 TEST SETUP

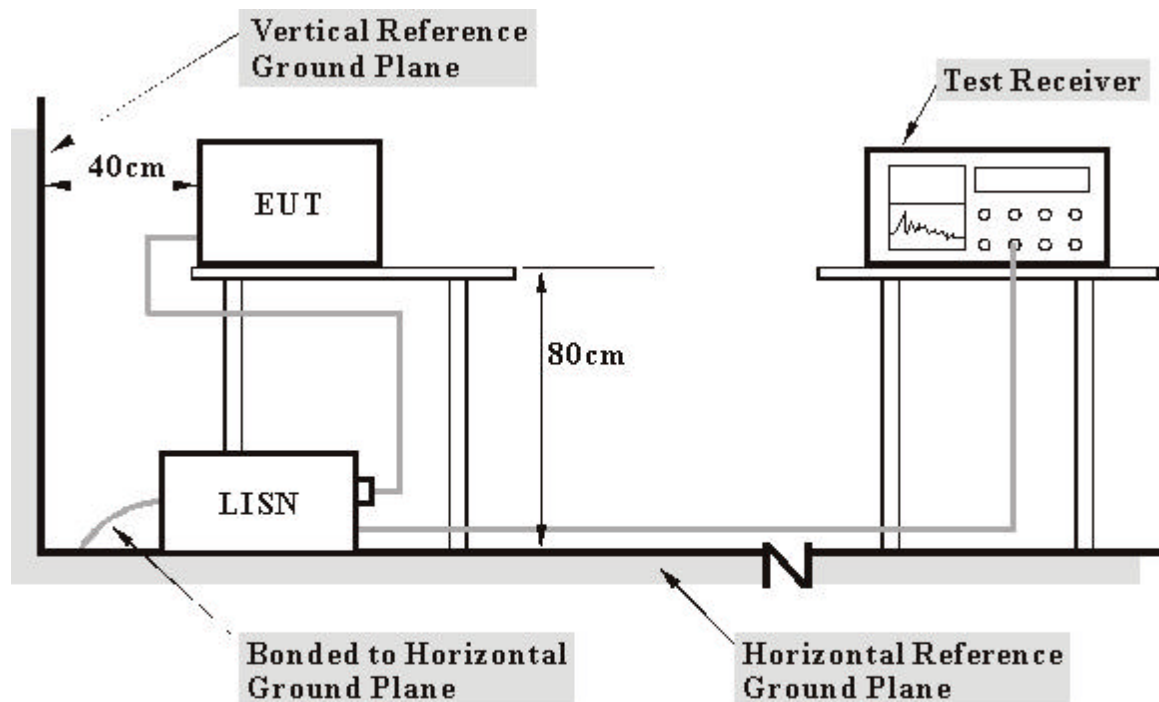

- Note:**
- Support units were connected to second LISN.
  - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### 4.1.4 EUT OPERATING CONDITIONS


- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program to enable EUT under transmission condition continuously at specific channel frequency.

## 4.1.5 TEST RESULTS

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.20	48.50	-	48.70	-	64.61	54.61	-15.91	-
2	0.236	0.20	43.94	-	44.14	-	62.24	52.24	-18.10	-
3	0.295	0.20	36.85	-	37.05	-	60.40	50.40	-23.35	-
4	0.353	0.20	35.16	-	35.36	-	58.89	48.89	-23.53	-
5	2.713	0.34	29.18	-	29.52	-	56.00	46.00	-26.48	-
6	5.539	0.50	30.86	-	31.36	-	60.00	50.00	-28.64	-


- NOTES:** (1) "": Undetectable  
(2) Q.P. and AV. are abbreviations of quasi-peak and average.  
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.  
(4) The emission levels of other frequencies were very low against the limit.  
(5) Correction Factor = Insertion loss + Cable loss  
(6) Margin value = Emission level - Limit value

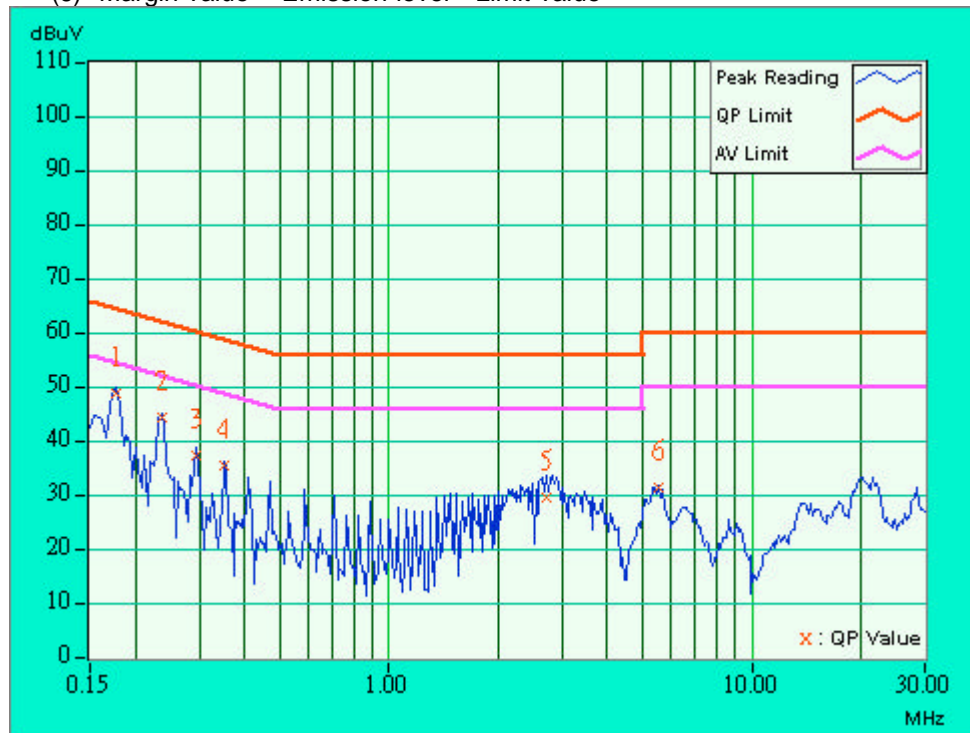

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.20	51.25	-	51.45	-	64.61	54.61	-13.16	-
2	0.236	0.20	42.07	-	42.27	-	62.24	52.24	-19.97	-
3	0.353	0.20	33.44	-	33.64	-	58.89	48.89	-25.25	-
4	0.474	0.21	29.15	-	29.36	-	56.44	46.44	-27.08	-
5	1.298	0.30	26.40	-	26.70	-	56.00	46.00	-29.30	-
6	3.832	0.39	32.90	-	33.29	-	56.00	46.00	-22.71	-

- NOTES:** (1) "": Undetectable  
(2) Q.P. and AV. are abbreviations of quasi-peak and average.  
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.  
(4) The emission levels of other frequencies were very low against the limit.  
(5) Correction Factor = Insertion loss + Cable loss  
(6) Margin value = Emission level - Limit value

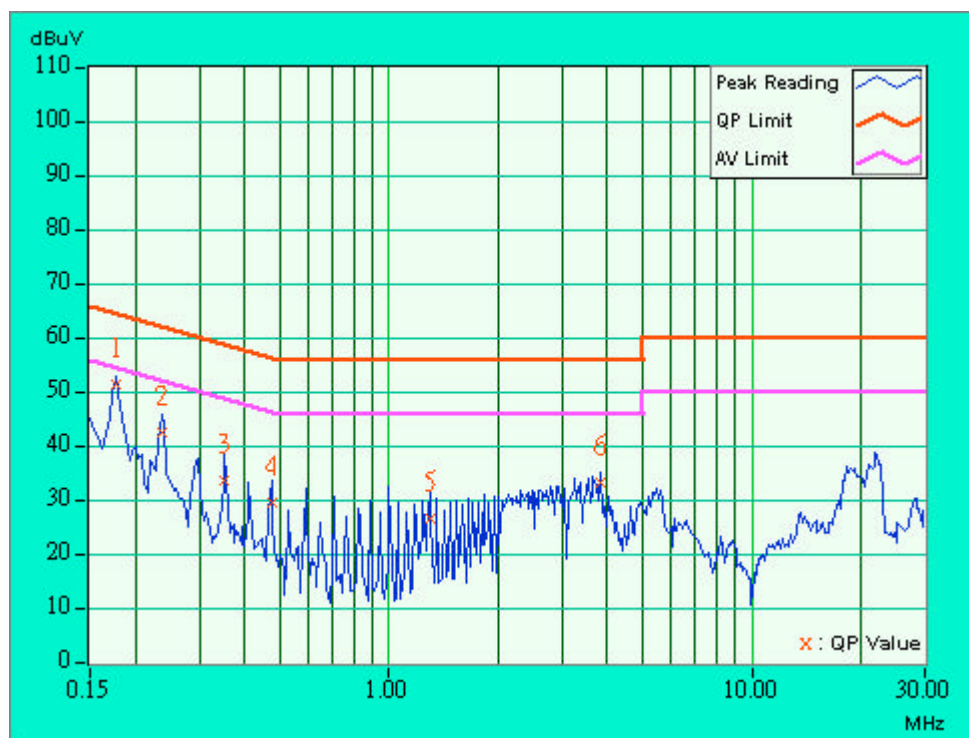

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

#### NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2004
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2004
Schwarzbeck Horn_Antenna	3115	5619	Jul. 17, 2004
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2003
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Feb. 10. 2004
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. \* = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 3789-C.




#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

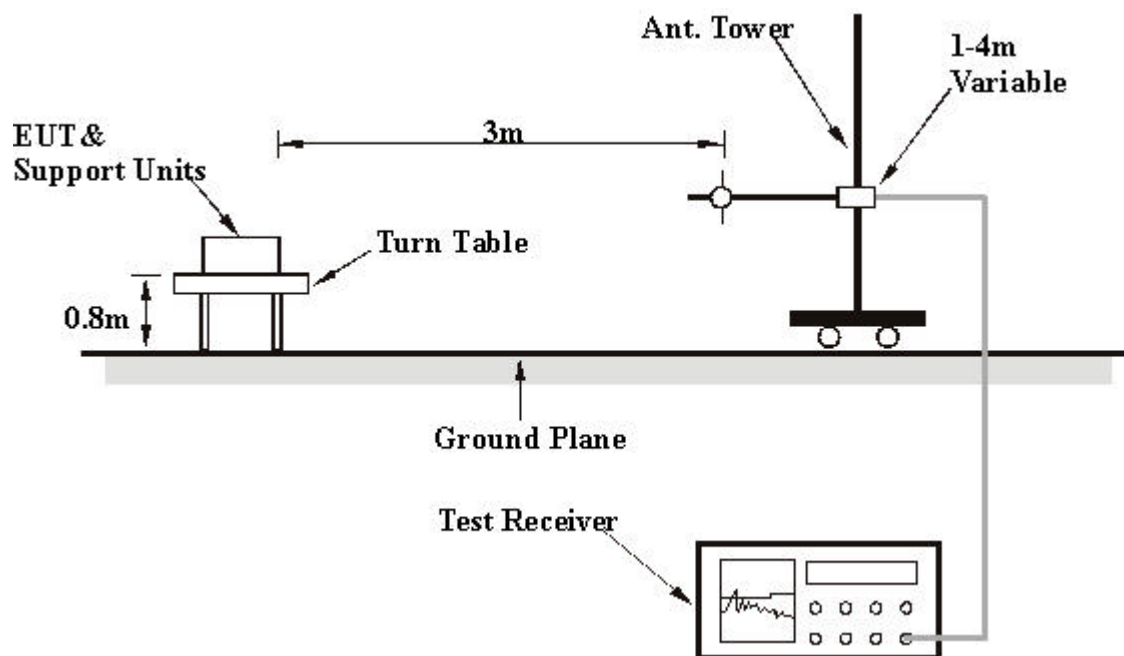

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

## 4.2.6 TEST RESULTS (A)

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.83	36.1 QP	40.00	-3.90	1.53 H	29	30.60	5.50
2	133.75	38.3 QP	43.50	-5.20	1.61 H	50	26.50	11.70
3	153.80	22.1 QP	43.50	-21.40	1.65 H	65	11.30	10.80
4	167.09	36.7 QP	43.50	-6.80	1.76 H	74	26.80	9.90
5	195.75	31.6 QP	43.50	-11.90	1.54 H	58	22.30	9.30
6	200.58	36.9 QP	43.50	-6.60	1.63 H	85	27.90	9.00
7	234.10	32.3 QP	46.00	-13.70	1.62 H	3	21.20	11.10
8	491.52	27.5 QP	46.00	-18.50	2.02 H	313	8.40	19.10
9	503.81	27.6 QP	46.00	-18.40	1.75 H	317	8.30	19.30
10	532.05	25.7 QP	46.00	-20.30	1.14 H	255	5.90	19.80

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	<b>66.78</b>	<b>36.4 QP</b>	<b>40.00</b>	<b>-3.60</b>	<b>1.15 V</b>	<b>135</b>	<b>30.90</b>	<b>5.50</b>
2	160.00	19.7 QP	43.50	-23.80	1.14 V	314	9.40	10.30
3	167.09	25.6 QP	43.50	-17.90	1.00 V	9	15.80	9.90
4	200.55	32.2 QP	43.50	-11.30	1.07 V	191	23.20	9.00
5	234.08	26.0 QP	46.00	-20.00	1.16 V	142	14.90	11.10
6	289.91	21.5 QP	46.00	-24.50	1.31 V	151	7.50	14.00
7	299.65	30.5 QP	46.00	-15.50	1.14 V	2	16.30	14.20
8	329.15	33.8 QP	46.00	-12.20	1.30 V	153	18.90	14.90
9	420.00	30.3 QP	46.00	-15.70	1.27 V	352	12.40	17.80
10	460.95	32.7 QP	46.00	-13.30	1.08 V	316	14.30	18.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247

## 4.2.7 TEST RESULTS (A) - DSSS

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average(AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	56.2 PK	74.00	-17.80	1.17 H	309	26.40	29.80
1	2388.00	46.5 AV	54.00	-7.50	1.17 H	309	16.70	29.80
2	*2412.00	96.3 PK			1.55 H	325	66.40	29.90
2	*2412.00	90.4 AV			1.55 H	325	60.50	29.90
3	2484.00	54.6 PK	74.00	-19.40	1.00 H	321	24.50	30.10
3	2484.00	46.5 AV	54.00	-7.50	1.00 H	321	16.40	30.10
4	4824.00	51.7 PK	74.00	-22.20	1.30 H	16	15.50	36.20
4	4824.00	40.6 AV	54.00	-13.40	1.30 H	16	4.40	36.20
5	9648.00	52.2 PK	76.30	-24.10	1.67 H	95	7.30	44.90
5	9648.00	45.9 AV	70.40	-24.50	1.67 H	95	1.00	44.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.00	-18.60	1.17 V	48	25.60	29.80
1	2390.00	46.5 AV	54.00	-7.50	1.17 V	48	16.70	29.80
2	*2412.00	100.2 PK			1.19 V	45	70.30	29.90
2	*2412.00	94.3 AV			1.19 V	45	64.40	29.90
3	2486.00	55.8 PK	74.00	-18.20	1.15 V	5	25.60	30.10
3	2486.00	46.7 AV	54.00	-7.30	1.15 V	5	16.50	30.10
4	4824.00	50.0 PK	74.00	-24.00	1.70 V	61	13.80	36.20
4	4824.00	42.1 AV	54.00	-11.90	1.70 V	61	5.80	36.20
5	9648.00	57.7 PK	80.20	-22.50	1.56 V	60	12.80	44.90
5	9648.00	52.8 AV	74.30	-21.50	1.56 V	60	7.90	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	54.4 PK	74.00	-19.60	1.24 H	309	24.60	29.80
1	2388.00	45.9 AV	54.00	-8.10	1.24 H	309	16.10	29.80
2	*2437.00	98.6 PK			1.10 H	354	68.70	30.00
2	*2437.00	93.0 AV			1.10 H	354	63.00	30.00
3	2489.00	55.5 PK	74.00	-18.50	1.22 H	294	25.30	30.20
3	2489.00	46.7 AV	54.00	-7.30	1.22 H	294	16.50	30.20
4	4874.00	49.0 PK	74.00	-25.00	1.31 H	156	12.50	36.50
4	4874.00	37.7 AV	54.00	-16.30	1.31 H	156	1.30	36.50
5	9748.00	54.7 PK	78.60	-23.90	1.68 H	97	10.00	44.60
5	9748.00	49.5 AV	73.00	-23.50	1.68 H	97	4.90	44.60

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2318.00	55.9 PK	74.00	-18.10	1.11 V	239	26.30	29.60
1	2318.00	46.0 AV	54.00	-8.00	1.11 V	239	16.50	29.60
2	*2437.00	99.8 PK			1.41 V	254	69.80	30.00
2	*2437.00	93.5 AV			1.41 V	254	63.50	30.00
3	2497.00	55.6 PK	74.00	-18.40	1.24 V	206	25.40	30.20
3	2497.00	46.5 AV	54.00	-7.50	1.24 V	206	16.30	30.20
4	4874.00	49.5 PK	74.00	-24.50	1.51 V	67	13.00	36.50
4	4874.00	49.5 PK	74.00	-24.50	1.51 V	67	4.90	36.50
5	9748.00	61.4 PK	79.80	-18.40	1.73 V	62	16.80	44.60
5	9748.00	59.0 AV	73.50	-14.50	1.73 V	62	14.30	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	55.3 PK	74.00	-18.70	1.27 H	62	25.50	29.80
1	2386.00	46.0 AV	54.00	-8.00	1.27 H	62	16.20	29.80
2	*2462.00	97.0 PK			1.24 H	71	66.90	30.10
2	*2462.00	90.6 AV			1.24 H	71	60.50	30.10
3	2498.00	58.3 PK	74.00	-15.70	1.05 H	24	28.10	30.20
3	2498.00	46.6 AV	54.00	-7.40	1.05 H	24	16.40	30.20
4	4924.00	53.9 PK	74.00	-20.10	1.63 H	7	17.20	36.70
4	4924.00	43.6 AV	54.00	-10.40	1.63 H	7	6.90	36.70
5	9848.00	56.4 PK	77.00	-20.60	1.23 H	165	12.00	44.40
5	9848.00	52.0 AV	70.60	-18.40	1.23 H	165	7.70	44.40

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2385.00	55.2 PK	74.00	-18.80	1.27 V	339	25.40	29.80
1	2385.00	45.9 AV	54.00	-8.10	1.27 V	339	16.10	29.80
2	*2462.00	100.8 PK			1.12 V	270	70.80	30.10
2	*2462.00	93.8 AV			1.12 V	270	63.70	30.10
3	2492.00	55.7 PK	74.00	-18.30	1.47 V	348	25.50	30.20
3	2492.00	46.7 AV	54.00	-7.30	1.47 V	348	16.50	30.20
4	4924.00	54.6 PK	74.00	-19.40	1.09 V	264	18.00	36.70
4	4924.00	46.9 AV	54.00	-7.10	1.09 V	264	10.20	36.70
5	9848.00	59.5 PK	80.80	-21.30	1.88 V	262	15.10	44.40
5	9848.00	56.8 AV	73.80	-17.00	1.88 V	262	12.50	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

## 4.2.8 TEST RESULTS (A) -OFDM

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average(AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56%RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.00	-19.90	1.52 H	101	24.30	29.80
1	2390.00	43.1 AV	54.00	-10.90	1.52 H	101	13.30	29.80
2	*2412.00	91.2 PK			1.01 H	180	61.30	29.90
2	*2412.00	83.9 AV			1.01 H	180	54.00	29.90
3	2486.00	52.2 PK	74.00	-21.80	1.05 H	62	22.10	30.10
3	2486.00	40.4 AV	54.00	-13.60	1.05 H	62	10.30	30.10
4	4824.00	45.9 PK	74.00	-28.10	1.07 H	6	9.60	36.20
4	4824.00	36.6 AV	54.00	-17.40	1.07 H	6	0.30	36.20
5	7236.00	48.8 PK	74.00	-25.20	1.55 H	261	7.20	41.70
5	7236.00	40.0 AV	54.00	-14.00	1.55 H	261	-1.70	41.70
6	9648.00	50.9 PK	74.00	-23.10	1.00 H	6	6.00	44.90
6	9648.00	42.7 AV	54.00	-11.30	1.00 H	6	-2.20	44.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.00	-17.80	1.33 V	208	26.30	29.80
1	2390.00	45.0 AV	54.00	-9.00	1.33 V	208	15.20	29.80
2	*2412.00	93.3 PK			1.06 V	76	63.40	29.90
2	*2412.00	85.3 AV			1.06 V	76	55.40	29.90
3	2486.00	55.8 PK	74.00	-18.20	1.02 V	49	25.70	30.10
3	2486.00	44.3 AV	54.00	-9.70	1.02 V	49	14.20	30.10
4	4824.00	47.1 PK	74.00	-26.90	1.25 V	47	10.90	36.20
4	4824.00	39.6 AV	54.00	-14.40	1.25 V	47	3.40	36.20
5	7236.00	50.9 PK	74.00	-23.10	1.01 V	236	9.20	41.70
5	7236.00	42.0 AV	54.00	-12.00	1.01 V	236	0.40	41.70
6	9648.00	53.4 PK	74.00	-20.60	1.01 V	4	8.50	44.90
6	9648.00	44.5 AV	54.00	-9.50	1.01 V	4	-0.40	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56%RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.0 PK	74.00	-23.00	1.04 H	24	21.20	29.80
1	2390.00	40.1 AV	54.00	-13.90	1.04 H	24	10.30	29.80
2	*2437.00	91.1 PK			1.68 H	32	61.10	30.00
2	*2437.00	83.0 AV			1.68 H	32	53.00	30.00
3	2483.50	50.8 PK	74.00	-23.20	1.36 H	98	20.60	30.10
3	2483.50	39.8 AV	54.00	-14.20	1.36 H	98	9.70	30.10
4	4874.00	46.2 PK	74.00	-27.80	1.68 H	36	9.70	36.50
4	4874.00	36.5 AV	54.00	-17.50	1.68 H	36	0.10	36.50
5	7311.00	48.1 PK	74.00	-25.90	1.03 H	101	6.30	41.80
5	7311.00	40.2 AV	54.00	-13.80	1.03 H	101	-1.60	41.80
6	9748.00	53.3 PK	74.00	-20.70	1.07 H	93	8.70	44.60
6	9748.00	43.0 AV	54.00	-11.00	1.07 H	93	-1.60	44.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.4 PK	74.00	-19.60	1.58 V	62	24.60	29.80
1	2390.00	42.1 AV	54.00	-11.90	1.58 V	62	12.30	29.80
2	*2437.00	93.1 PK			1.05 V	67	63.10	30.00
2	*2437.00	84.4 AV			1.05 V	67	54.40	30.00
3	2483.50	54.3 PK	74.00	-19.70	1.00 V	101	24.20	30.10
3	2483.50	44.0 AV	54.00	-10.00	1.00 V	101	13.90	30.10
4	4874.00	47.3 PK	74.00	-26.70	1.57 V	98	10.80	36.50
4	4874.00	39.9 AV	54.00	-14.10	1.57 V	98	3.40	36.50
5	7311.00	54.1 PK	74.00	-19.90	1.35 V	264	12.30	41.80
5	7311.00	43.6 AV	54.00	-10.40	1.35 V	264	1.80	41.80
6	9748.00	53.3 PK	74.00	-20.70	1.54 V	10	8.70	44.60
6	9748.00	44.4 AV	54.00	-9.60	1.54 V	10	-0.20	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56%RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.0 PK	74.00	-25.00	1.40 H	12	19.20	29.80
1	2390.00	38.4 AV	54.00	-15.60	1.40 H	12	8.60	29.80
2	*2462.00	91.1 PK			1.03 H	2	61.00	30.10
2	*2462.00	83.3 AV			1.03 H	2	53.20	29.80
3	2483.50	49.2 PK	74.00	-24.80	1.35 H	249	19.00	30.10
3	2483.50	39.1 AV	54.00	-14.90	1.35 H	249	9.00	30.10
4	4924.00	46.9 PK	74.00	-27.10	1.01 H	24	10.20	36.70
4	4924.00	38.1 AV	54.00	-15.90	1.01 H	24	1.40	36.70
5	7386.00	51.1 PK	74.00	-22.90	1.25 H	50	9.20	41.80
5	7386.00	40.3 AV	54.00	-13.70	1.25 H	50	-1.50	41.80
6	9848.00	54.2 PK	74.00	-19.80	1.02 H	59	9.80	44.40
6	9848.00	43.4 AV	54.00	-10.60	1.02 H	59	-0.90	44.40

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.0 PK	74.00	-23.00	1.07 V	48	21.20	29.80
1	2390.00	40.4 AV	54.00	-13.60	1.07 V	48	10.60	29.80
2	*2462.00	93.1 PK			1.25 V	87	63.00	30.10
2	*2462.00	84.4 AV			1.25 V	87	54.40	30.10
3	2483.50	53.8 PK	74.00	-20.20	1.36 V	360	23.60	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.36 V	360	12.30	30.10
4	4924.00	47.7 PK	74.00	-26.30	1.34 V	54	11.10	36.70
4	4924.00	40.2 AV	54.00	-13.80	1.34 V	54	3.50	36.70
5	7386.00	51.3 PK	74.00	-22.70	1.68 V	333	9.50	41.80
5	7386.00	43.6 AV	54.00	-10.40	1.68 V	333	1.80	36.70
6	9848.00	54.5 PK	74.00	-19.50	1.85 V	246	10.10	44.40
6	9848.00	45.7 AV	54.00	-8.30	1.85 V	246	1.40	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

## 4.2.9 TEST RESULTS (B)

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.59	35.4 QP	40.00	-4.60	1.62 H	68	29.90	5.50
2	133.55	33.1 QP	43.50	-10.40	1.36 H	60	21.40	11.70
3	144.00	22.0 QP	43.50	-21.50	1.62 H	39	10.40	11.60
4	159.55	21.6 QP	43.50	-21.90	1.53 H	59	11.30	10.30
5	167.09	35.5 QP	43.50	-8.00	1.46 H	15	25.60	9.90
6	195.75	32.0 QP	43.50	-11.50	1.30 H	100	22.80	9.30
7	200.60	32.8 QP	43.50	-10.70	1.71 H	8	23.90	9.00
8	234.55	36.4 QP	46.00	-9.60	1.69 H	12	25.30	11.10
9	491.52	28.3 QP	46.00	-17.70	2.10 H	311	9.20	19.10
10	503.81	27.6 QP	46.00	-18.40	1.91 H	293	8.30	19.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.59	36.2 QP	40.00	-3.90	1.39 V	58	30.70	5.50
2	160.00	20.5 QP	43.50	-23.00	1.21 V	26	10.20	10.30
3	167.09	29.4 QP	43.50	-14.10	1.59 V	71	19.50	9.90
4	200.60	28.1 QP	43.50	-15.40	1.57 V	47	19.10	9.00
5	210.00	21.7 QP	43.50	-21.80	1.00 V	332	12.80	8.90
6	290.15	19.8 QP	46.00	-26.20	1.45 V	210	5.80	14.00
7	300.50	29.4 QP	46.00	-16.60	1.26 V	0	15.20	14.20
8	329.55	31.0 QP	46.00	-15.00	1.27 V	345	16.10	14.90
9	420.00	31.7 QP	46.00	-14.30	1.22 V	350	13.90	17.80
10	585.25	24.7 QP	46.00	-21.30	2.57 V	79	3.60	21.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247

## 4.2.10 TEST RESULTS (B) - DSSS

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average(AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57 % RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.00	56.3 PK	74.00	-17.70	1.24 H	31	26.50	29.80
1	2384.00	46.5 AV	54.00	-7.50	1.24 H	31	16.70	29.80
2	*2412.00	99.1 PK			1.16 H	46	69.20	29.90
2	*2412.00	93.3 AV			1.16 H	46	63.40	29.90
3	2495.00	56.1 PK	74.00	-17.90	1.17 H	68	25.90	30.20
3	2495.00	46.6 AV	54.00	-7.40	1.17 H	68	16.40	30.20
4	4825.00	46.7 PK	74.00	-27.30	1.69 H	1	10.40	36.20
4	4825.00	37.0 AV	54.00	-17.00	1.69 H	1	0.80	36.20
5	9648.00	50.0 PK	79.10	-29.10	2.14 H	16	5.10	44.90
5	9648.00	40.6 AV	73.30	-22.70	2.14 H	16	-4.30	44.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	55.6 PK	74.00	-18.40	1.02 V	59	25.80	29.80
1	2386.00	46.8 AV	54.00	-7.20	1.02 V	59	17.10	29.80
2	*2412.00	101.8 PK			1.00 V	59	71.90	29.90
2	*2412.00	95.2 AV			1.00 V	59	65.30	29.90
3	2487.00	55.3 PK	74.00	-18.70	1.40 V	69	25.10	30.10
3	2487.00	46.6 AV	54.00	-7.40	1.40 V	69	16.50	30.10
4	4824.00	48.4 PK	74.00	-25.60	1.71 V	57	12.20	36.20
4	4824.00	39.6 AV	54.00	-14.40	1.71 V	57	3.40	36.20
5	9648.00	53.4 PK	81.80	-28.40	1.44 V	59	8.50	44.90
5	9648.00	47.3 AV	75.20	-27.90	1.44 V	59	2.40	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57 % RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2379.00	54.6 PK	74.00	-19.40	1.27 H	169	24.90	29.70
1	2379.00	45.7 AV	54.00	-8.30	1.27 H	169	16.00	29.70
2	*2437.00	99.9 PK			1.23 H	160	69.90	30.00
2	*2437.00	93.1 AV			1.23 H	160	63.10	30.00
3	2485.00	56.0 PK	74.00	-18.00	1.22 H	144	25.90	30.10
3	2485.00	46.5 AV	54.00	-7.50	1.22 H	144	16.40	30.10
4	4871.00	48.2 PK	74.00	-25.80	1.66 H	161	11.80	36.40
4	4871.00	39.6 AV	54.00	-14.40	1.66 H	161	3.20	36.40
5	9748.00	55.3 PK	79.90	-24.60	1.36 H	60	10.70	44.60
5	9748.00	50.6 AV	73.10	-22.40	1.36 H	60	6.00	44.60

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	55.8 PK	74.00	-18.20	1.00 V	42	26.10	29.80
1	2388.00	46.2 AV	54.00	-7.80	1.00 V	42	16.40	29.80
2	*2437.00	99.6 PK			1.00 V	46	69.70	30.00
2	*2437.00	93.1 AV			1.00 V	46	63.10	30.00
3	2495.00	55.5 PK	74.00	-18.50	1.07 V	245	25.30	30.20
3	2495.00	46.6 AV	54.00	-7.40	1.07 V	245	16.40	30.20
4	4874.00	47.0 PK	74.00	-27.00	1.68 V	69	10.50	36.50
4	4874.00	39.3 AV	54.00	-14.70	1.68 V	69	2.80	36.50
5	9748.00	61.4 PK	79.60	-18.20	1.61 V	63	16.80	44.60
5	9748.00	58.6 AV	73.10	-15.50	1.61 V	63	14.00	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57 % RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.0 PK	74.00	-19.00	1.27 H	163	25.40	29.70
1	2360.00	46.0 AV	54.00	-8.00	1.27 H	163	16.30	29.70
2	*2462.00	98.8 PK			1.20 H	189	68.70	30.10
2	*2462.00	92.0 AV			1.20 H	189	61.90	30.10
3	2484.00	55.5 PK	74.00	-18.50	1.53 H	123	25.40	30.10
3	2484.00	47.0 AV	54.00	-7.00	1.53 H	123	16.90	30.10
4	4922.00	49.7 PK	74.00	-24.30	1.74 H	142	13.00	36.70
4	4922.00	41.4 AV	54.00	-12.60	1.74 H	142	4.70	36.70
5	9848.00	58.5 PK	78.80	-23.30	1.85 H	199	14.20	44.40
5	9848.00	55.2 AV	72.00	-16.80	1.85 H	199	10.80	44.40

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	55.1 PK	74.00	-18.90	1.57 V	100	25.30	29.80
1	2389.00	46.3 AV	54.00	-7.70	1.57 V	100	16.50	29.80
2	*2462.00	99.5 PK			1.53 V	104	69.40	30.10
2	*2462.00	93.4 AV			1.53 V	104	63.30	30.10
3	2484.00	56.0 PK	74.00	-18.00	1.59 V	149	25.90	30.10
3	2484.00	46.9 AV	54.00	-7.10	1.59 V	149	16.80	30.10
4	4922.00	55.0 PK	74.00	-19.00	1.51 V	109	18.30	36.70
4	4922.00	45.4 AV	54.00	-8.60	1.51 V	109	8.80	36.70
5	9848.00	62.5 PK	79.50	-17.00	1.87 V	105	18.10	44.40
5	9848.00	60.6 AV	73.40	-12.80	1.87 V	105	16.20	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

## 4.2.11 TEST RESULTS (B) -OFDM

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average(AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56 % RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.6 PK	74.00	-16.40	1.04 H	215	27.80	29.80
1	2390.00	46.1 AV	54.00	-7.90	1.04 H	215	16.30	29.80
2	*2412.00	95.0 PK			1.52 H	212	65.10	29.90
2	*2412.00	86.3 AV			1.52 H	212	56.40	29.90
3	2483.50	51.6 PK	74.00	-22.40	1.06 H	2	21.50	30.10
3	2483.50	43.3 AV	54.00	-10.70	1.06 H	2	13.20	30.10
4	4824.00	48.7 PK	74.00	-25.20	1.06 H	316	12.50	36.20
4	4824.00	39.6 AV	54.00	-14.40	1.06 H	316	3.40	36.20
5	7236.00	51.9 PK	74.00	-22.10	1.24 H	99	10.20	41.70
5	7236.00	43.6 AV	54.00	-10.40	1.24 H	99	1.90	41.70
6	9648.00	54.0 PK	74.00	-20.00	1.04 H	14	9.10	44.90
6	9648.00	44.8 AV	54.00	-9.20	1.04 H	14	-0.10	44.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.00	-18.90	1.51 V	9	25.30	29.80
1	2390.00	43.0 AV	54.00	-11.00	1.51 V	9	13.20	29.80
2	*2412.00	90.2 PK			1.05 V	249	60.30	29.90
2	*2412.00	81.6 AV			1.05 V	249	51.70	29.90
3	2483.50	49.7 PK	74.00	-24.20	1.30 V	264	19.60	30.10
3	2483.50	40.2 AV	54.00	-13.80	1.30 V	264	10.10	30.10
4	4824.00	45.9 PK	74.00	-28.10	1.54 V	219	9.70	36.20
4	4824.00	43.1 AV	54.00	-10.90	1.54 V	219	6.90	36.20
5	7236.00	49.0 PK	74.00	-25.00	1.08 V	7	7.30	41.70
5	7236.00	40.0 AV	54.00	-14.00	1.08 V	7	-1.70	41.70
6	9648.00	50.3 PK	74.00	-23.70	1.08 V	9	5.40	44.90
6	9648.00	43.2 AV	54.00	-10.80	1.08 V	9	-1.70	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56 % RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.5 PK	74.00	-19.50	1.37 H	15	24.70	29.80
1	2390.00	43.0 AV	54.00	-11.00	1.37 H	15	13.20	29.80
2	*2437.00	96.1 PK			1.04 H	215	66.10	30.00
2	*2437.00	87.7 AV			1.04 H	215	57.70	30.00
3	2483.50	53.7 PK	74.00	-20.20	1.07 H	79	23.60	30.10
3	2483.50	42.8 AV	54.00	-11.20	1.07 H	79	12.70	30.10
4	4874.00	49.7 PK	74.00	-24.30	1.68 H	9	13.20	36.50
4	4874.00	40.6 AV	54.00	-13.40	1.68 H	9	4.10	36.50
5	7311.00	52.8 PK	74.00	-21.20	1.69 H	39	11.00	41.80
5	7311.00	44.2 AV	54.00	-9.80	1.69 H	39	2.40	41.80
6	9748.00	55.4 PK	74.00	-18.60	1.08 H	266	10.80	44.60
6	9748.00	45.5 AV	54.00	-8.50	1.08 H	266	0.90	44.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.1 PK	74.00	-22.80	1.40 V	102	21.30	29.80
1	2390.00	40.1 AV	54.00	-13.90	1.40 V	102	10.30	29.80
2	*2437.00	91.0 PK			1.07 V	256	61.00	30.00
2	*2437.00	81.1 AV			1.07 V	256	51.10	30.00
3	2483.50	46.3 PK	74.00	-27.70	1.35 V	246	16.20	30.10
3	2483.50	38.2 AV	54.00	-15.80	1.35 V	246	8.10	30.10
4	4874.00	46.8 PK	74.00	-27.20	1.58 V	8	10.30	36.50
4	4874.00	43.9 AV	54.00	-10.10	1.58 V	8	7.40	36.50
5	7311.00	48.7 PK	74.00	-25.30	1.54 V	2	6.90	41.80
5	7311.00	40.9 AV	54.00	-13.10	1.54 V	2	-0.90	41.80
6	9748.00	50.7 PK	74.00	-23.30	1.09 V	265	6.10	44.60
6	9748.00	42.6 AV	54.00	-11.40	1.09 V	265	-2.0	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency



<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter	<b>MODEL</b>	WN4402A
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1000~40000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	28 deg. C, 56 % RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.9 PK	74.00	-20.10	1.01 H	4	24.10	29.80
1	2390.00	43.1 AV	54.00	-10.90	1.01 H	4	13.30	29.80
2	*2462.00	97.0 PK			1.20 H	2	66.90	30.10
2	*2462.00	87.8 AV			1.20 H	2	57.70	30.10
3	2483.50	56.0 PK	74.00	-17.90	1.07 H	45	25.90	30.10
3	2483.50	46.4 AV	54.00	-7.60	1.07 H	45	16.30	30.10
4	4924.00	46.8 PK	74.00	-27.20	1.12 H	138	10.10	36.70
4	4924.00	38.2 AV	54.00	-15.80	1.12 H	138	1.50	36.70
5	7386.00	53.5 PK	74.00	-20.50	1.07 H	44	11.70	41.80
5	7386.00	44.6 AV	54.00	-9.40	1.07 H	44	2.80	41.80
6	9848.00	55.0 PK	74.00	-19.00	1.08 H	62	10.60	44.40
6	9848.00	44.3 AV	54.00	-9.70	1.08 H	62	-0.10	44.40

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	46.3 PK	74.00	-27.70	1.55 V	332	16.50	29.80
1	2390.00	38.0 AV	54.00	-16.00	1.55 V	332	8.20	29.80
2	*2462.00	90.5 PK			1.00 V	9	60.40	30.10
2	*2462.00	81.4 AV			1.00 V	9	51.30	30.10
3	2483.50	53.8 PK	74.00	-20.20	1.50 V	359	23.70	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.50 V	359	12.30	30.10
4	4924.00	52.8 PK	74.00	-21.20	1.41 V	2	16.10	36.70
4	4924.00	44.6 AV	54.00	-9.40	1.41 V	2	7.90	36.70
5	7386.00	52.9 PK	74.00	-21.00	1.11 V	224	11.10	41.80
5	7386.00	41.5 AV	54.00	-12.40	1.11 V	224	-0.30	41.80
6	9848.00	51.3 PK	74.00	-22.70	1.52 V	3	6.90	44.40
6	9848.00	41.5 AV	54.00	-12.60	1.52 V	3	-2.90	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.6 TEST RESULTS-DSSS


<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	11.48	0.5	PASS
6	2437	11.28	0.5	PASS
11	2462	11.28	0.5	PASS


CH1

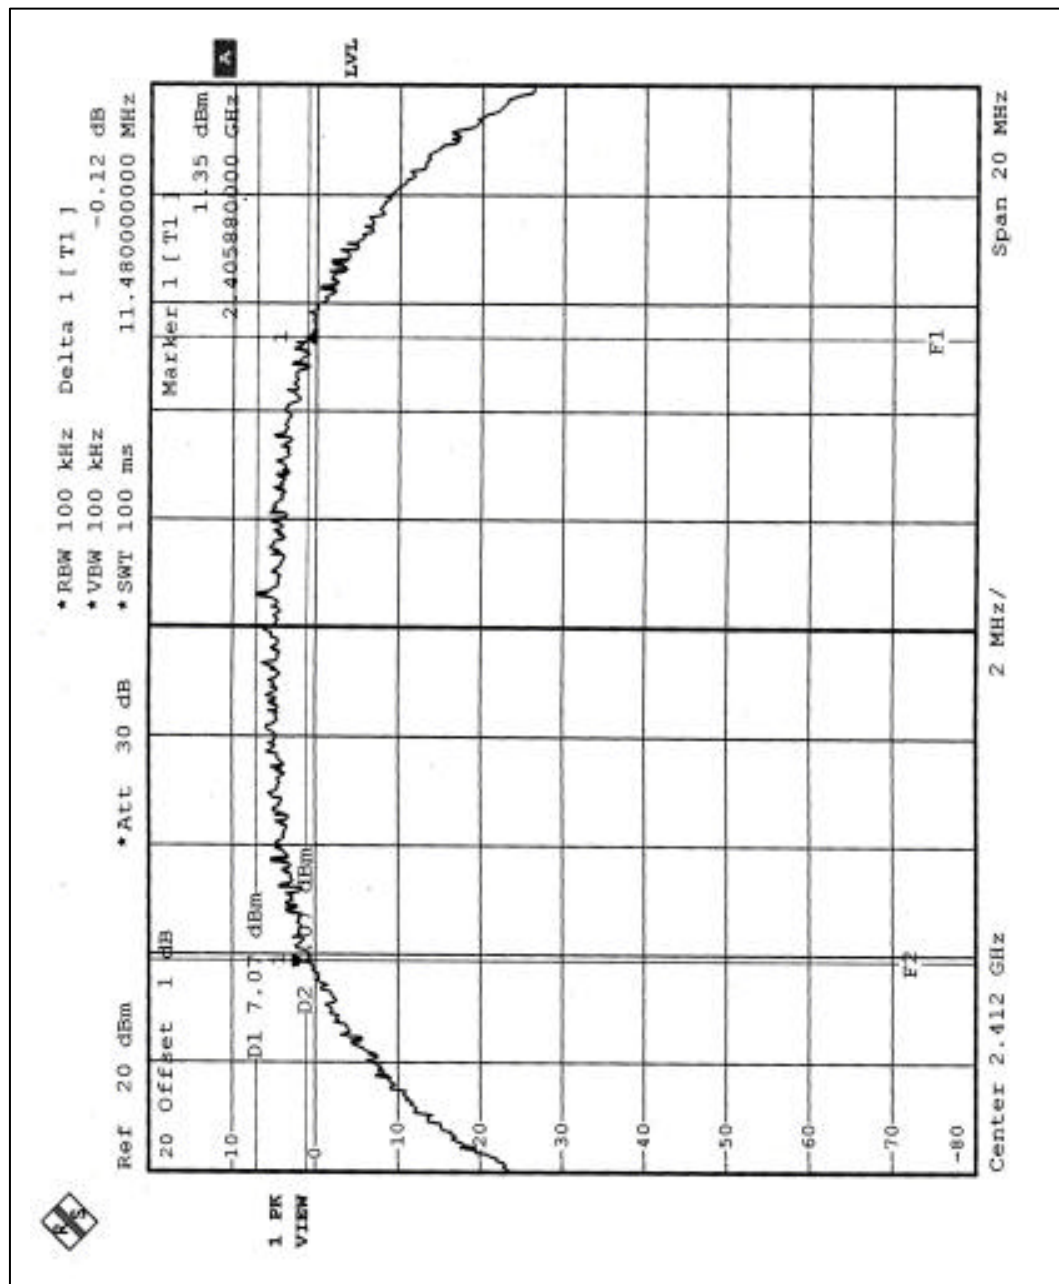

CH6

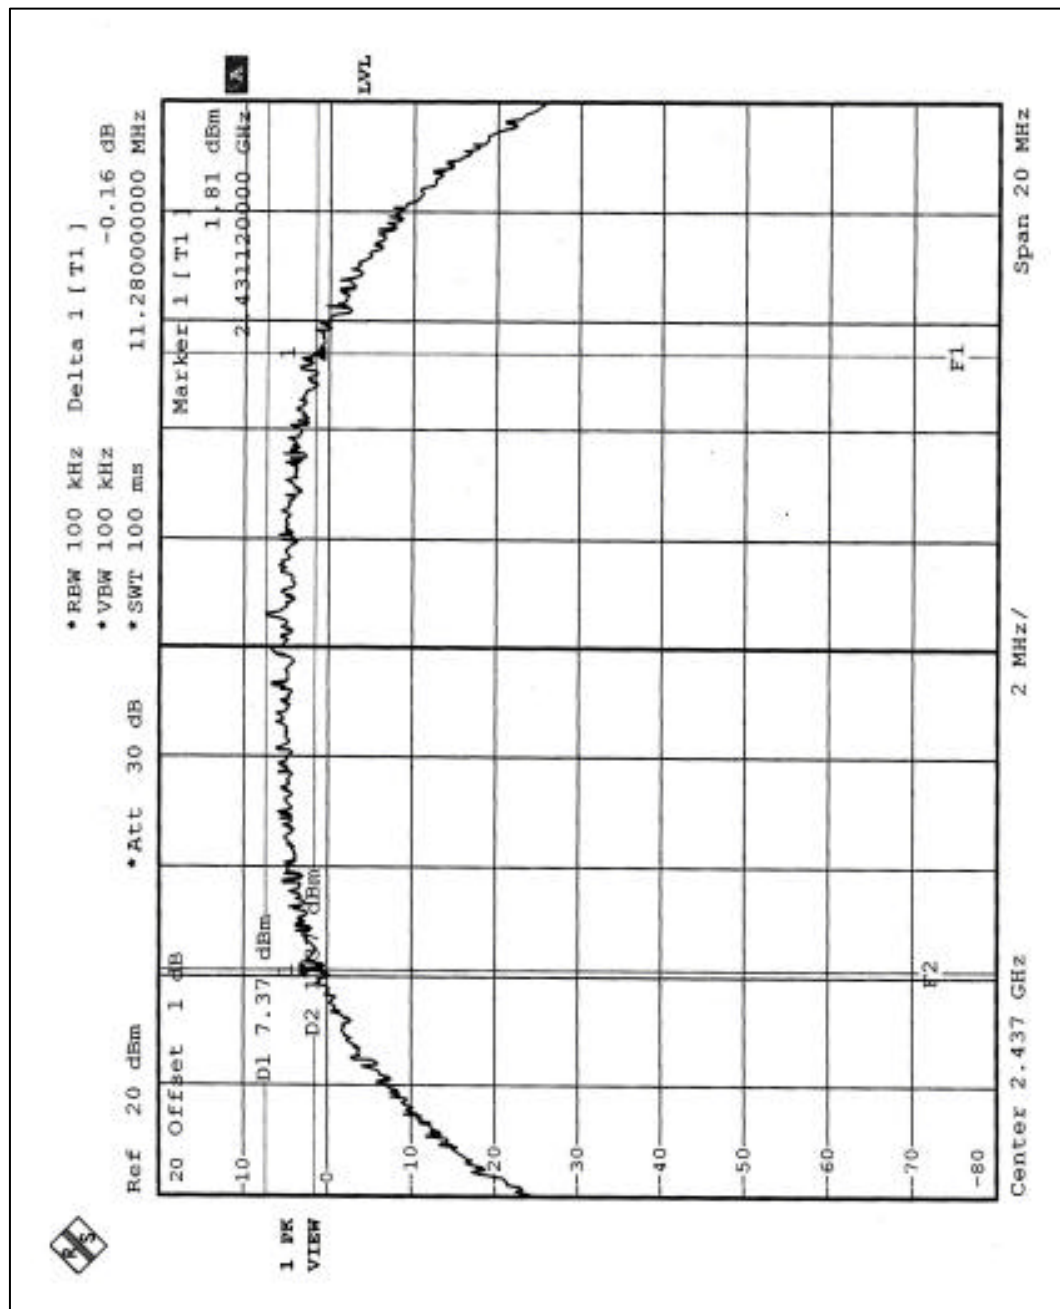

CH11

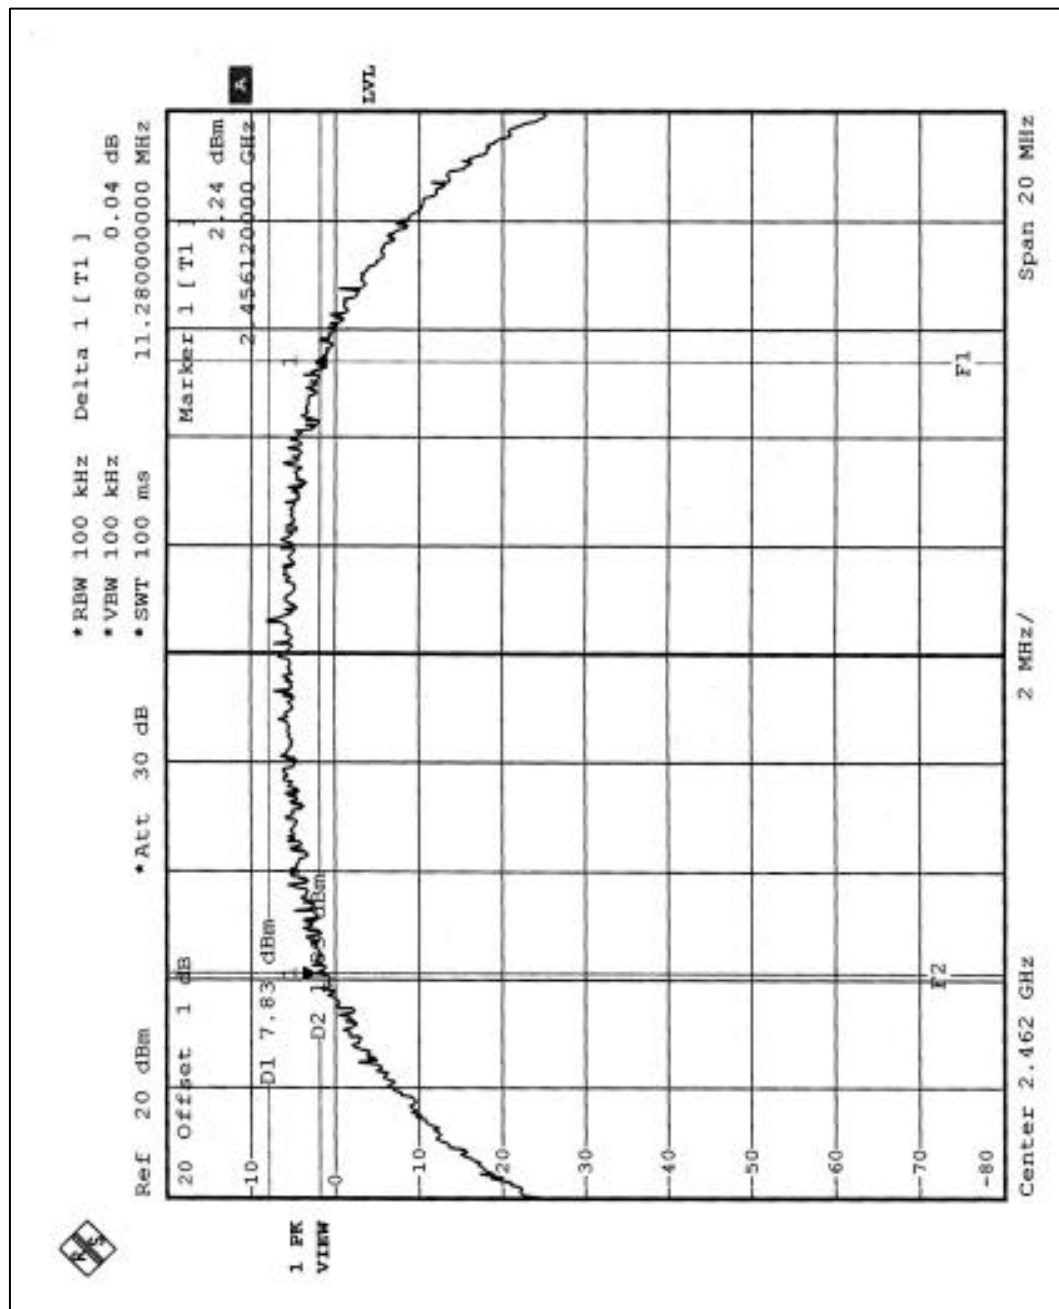


## 4.3.7 TEST RESULTS-OFDM


<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.60	0.5	PASS
6	2437	16.60	0.5	PASS
11	2462	16.55	0.5	PASS


CH1

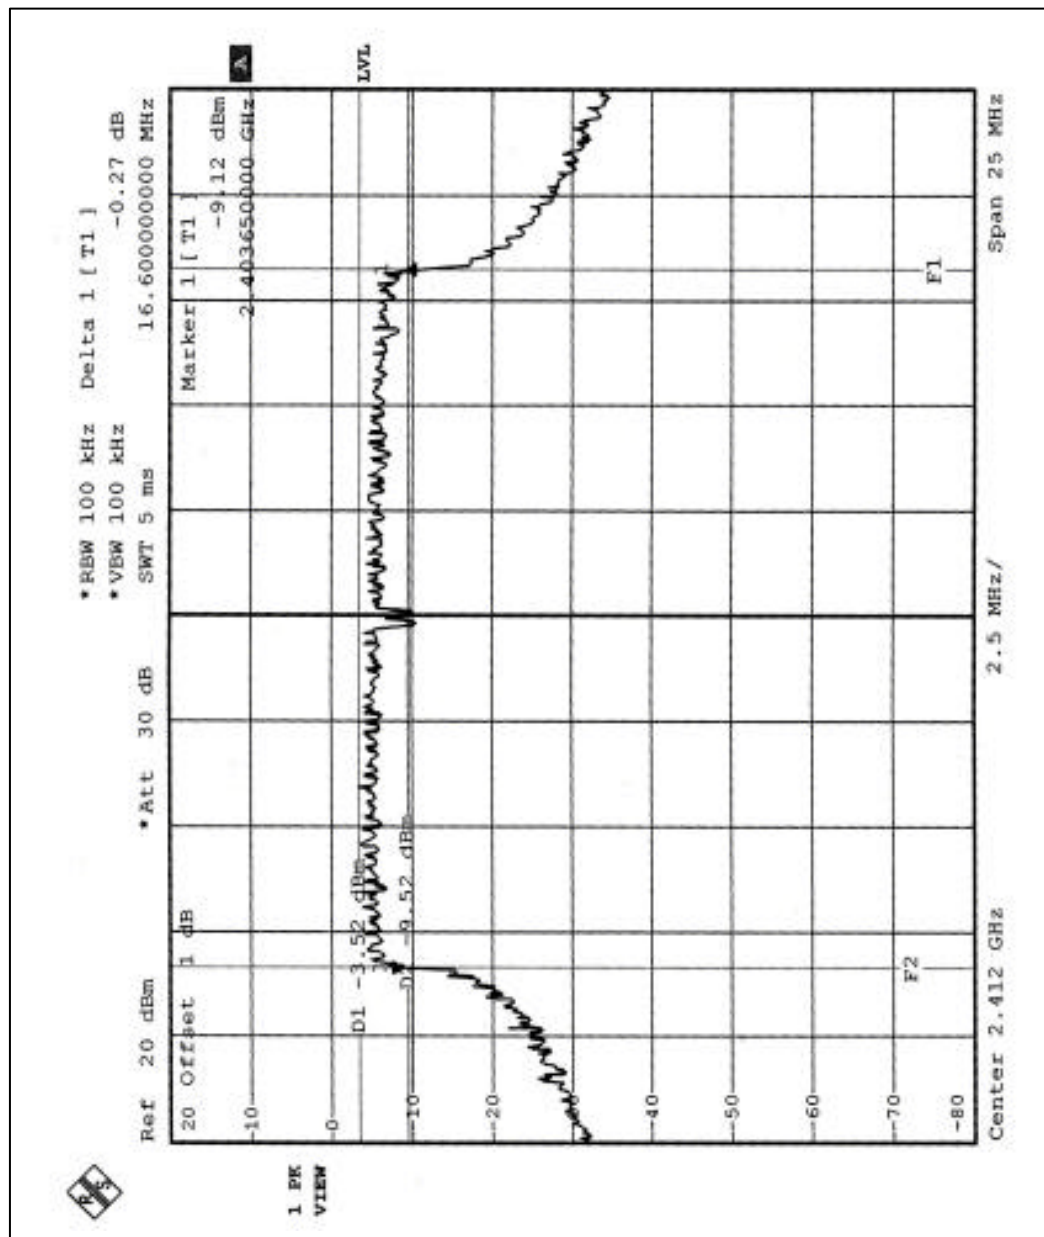

CH6

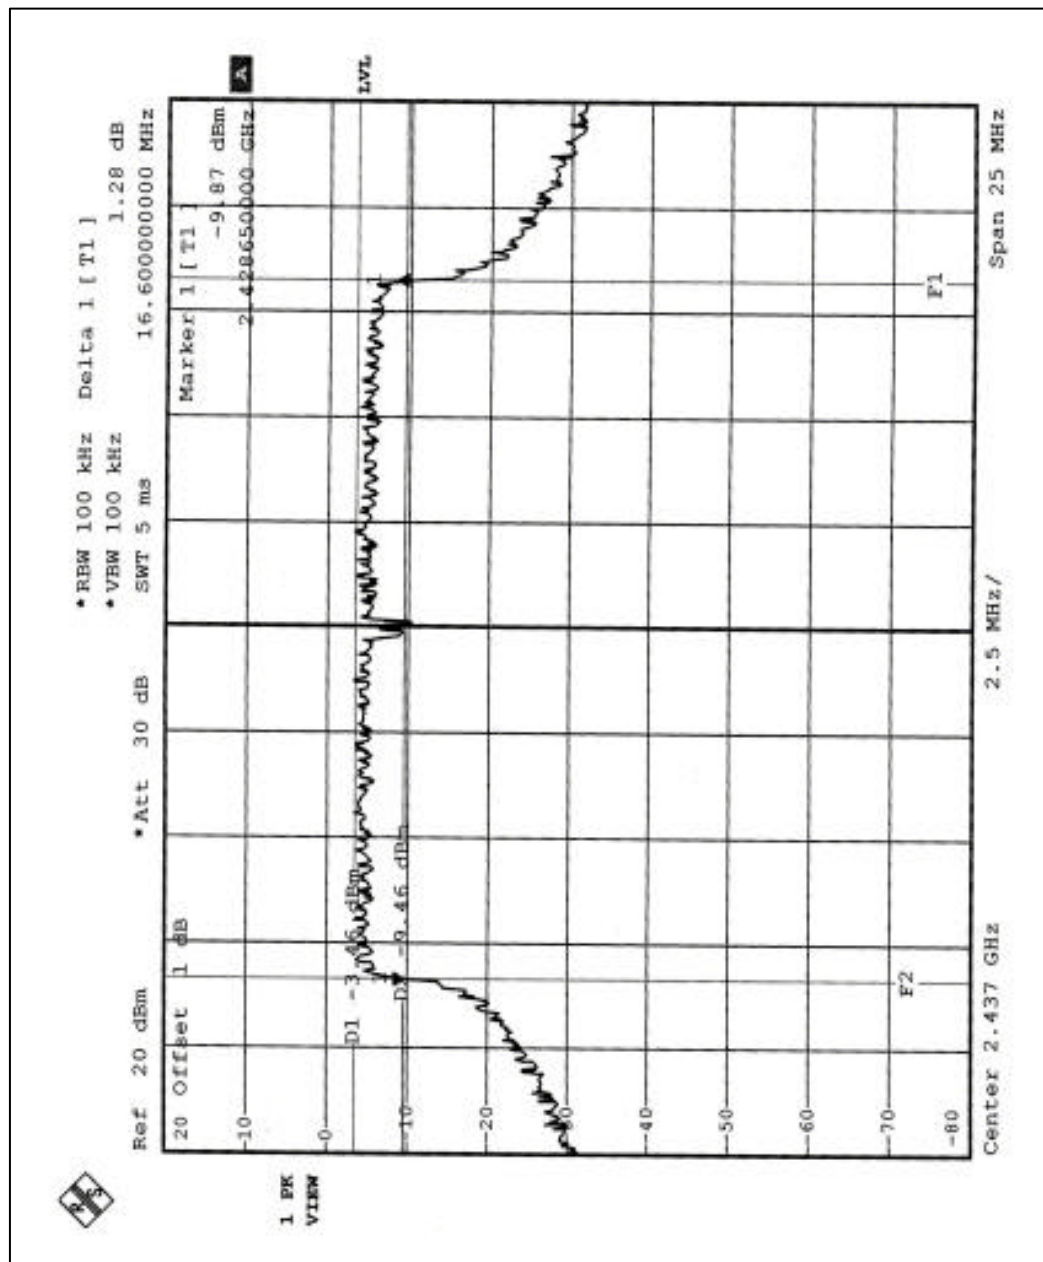

CH11

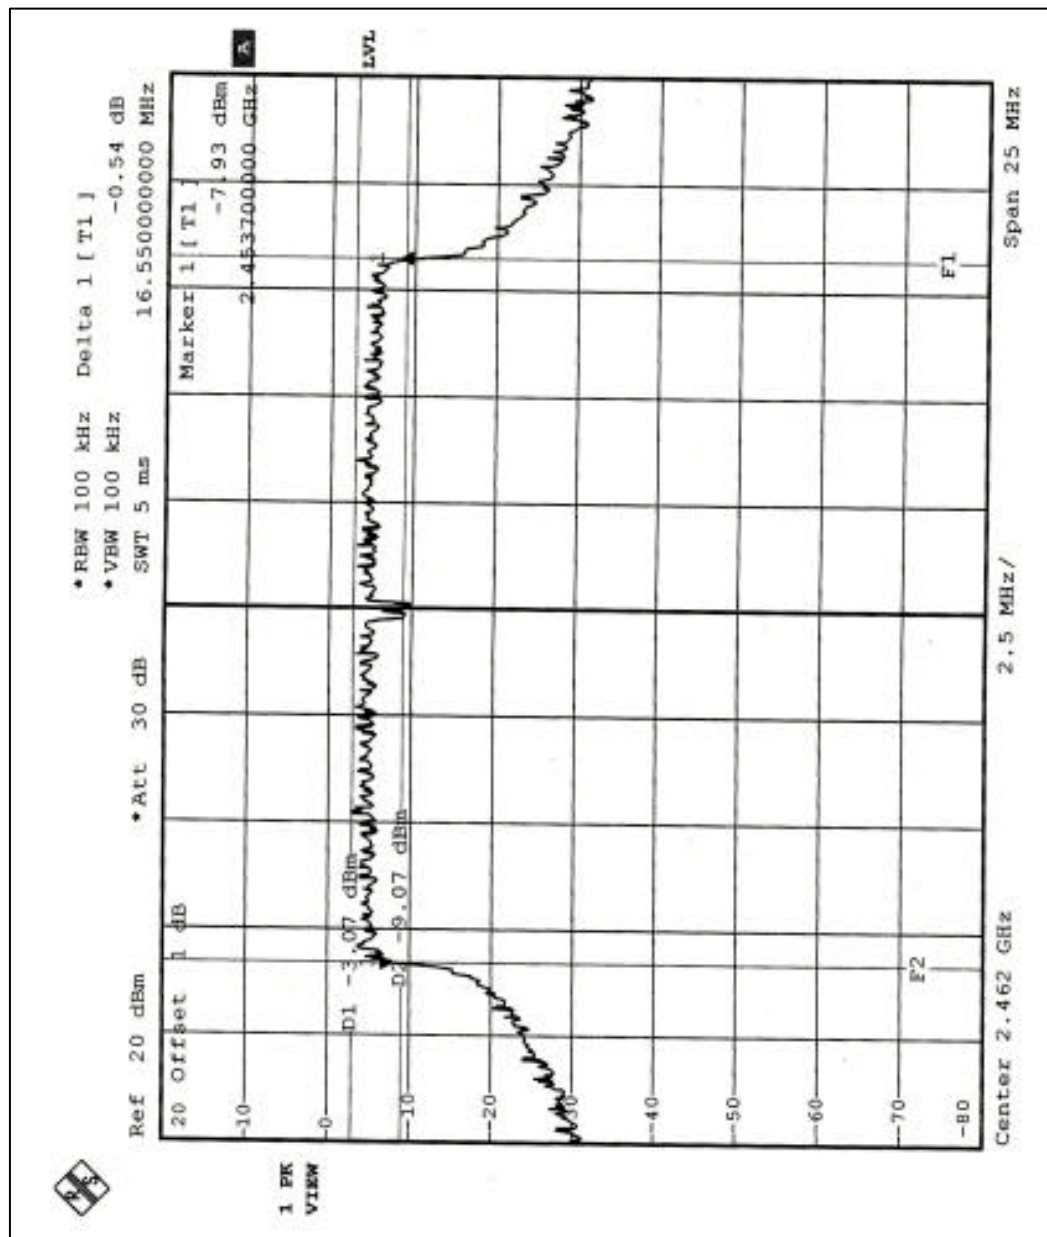

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA


**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 4.4.4 TEST SETUP



#### 4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

## 4.4.6 TEST RESULTS-DSSS

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	21 deg. C, 58 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.16	30	PASS
6	2437	18.28	30	PASS
11	2462	18.39	30	PASS

## 4.4.7 TEST RESULTS-OFDM

<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	21 deg. C, 58 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.50	30	PASS
6	2437	13.43	30	PASS
11	2462	13.29	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 TEST SETUP



#### 4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

## 4.5.6 TEST RESULTS-DSSS


<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-2.18	8	PASS
6	2437	-2.12	8	PASS
11	2462	-1.82	8	PASS


CH1

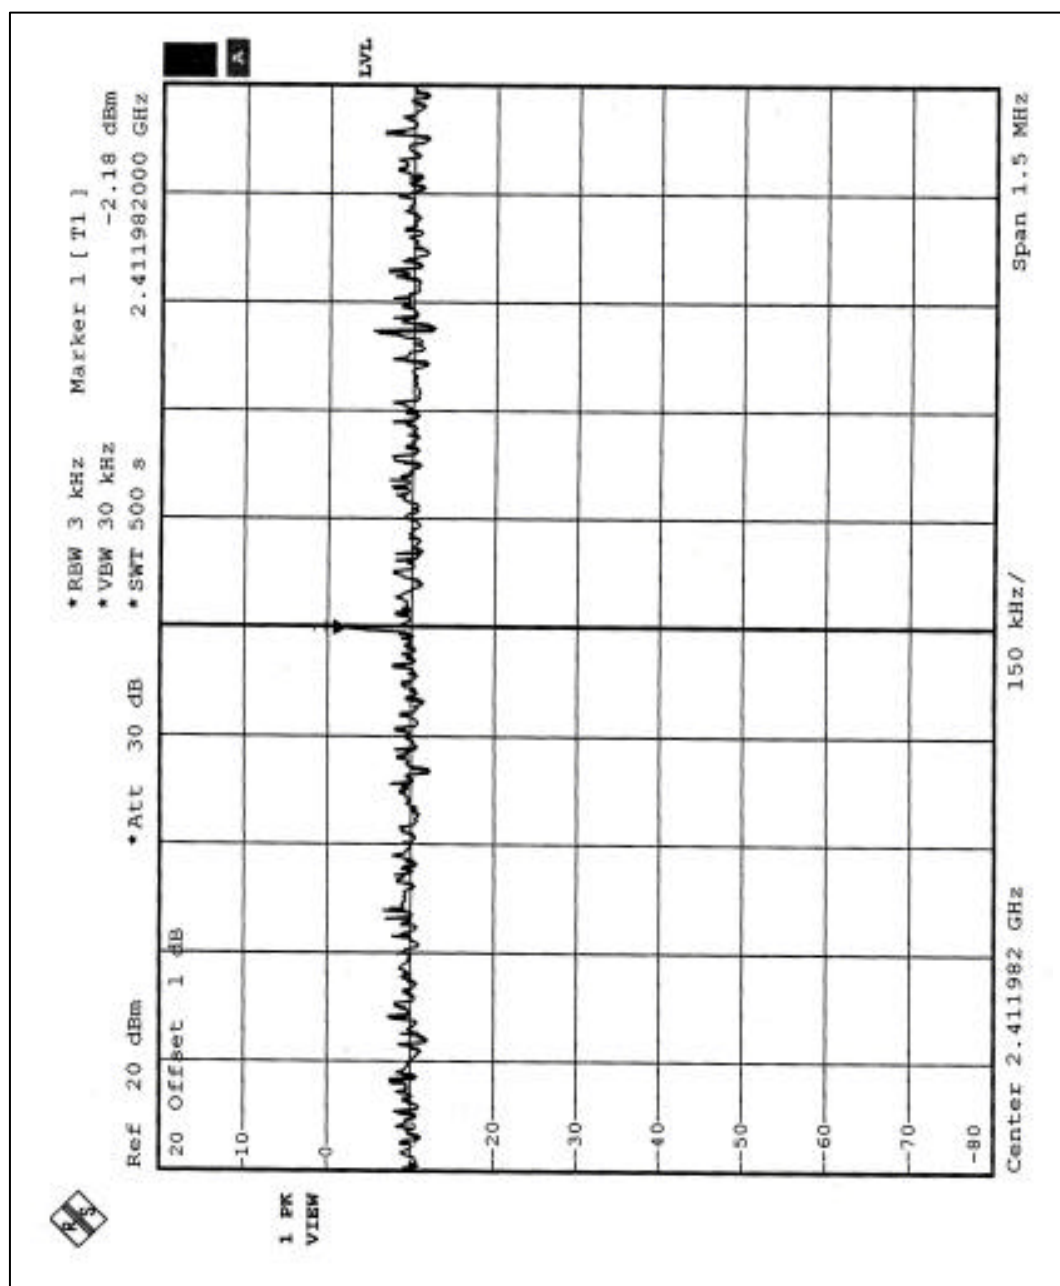

CH6

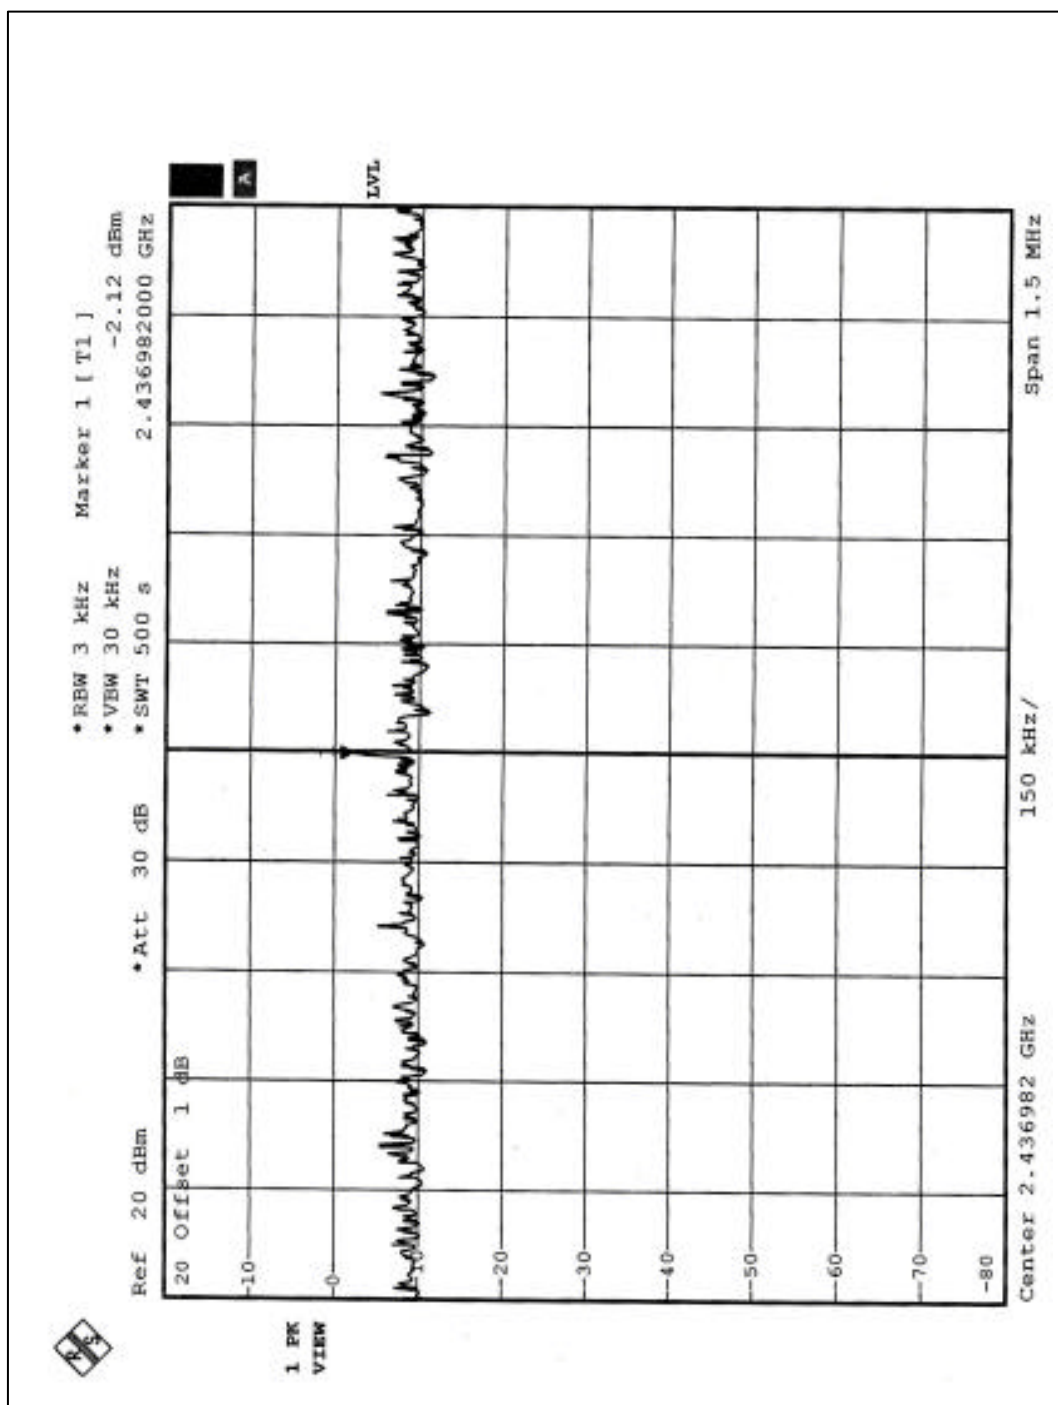

CH11

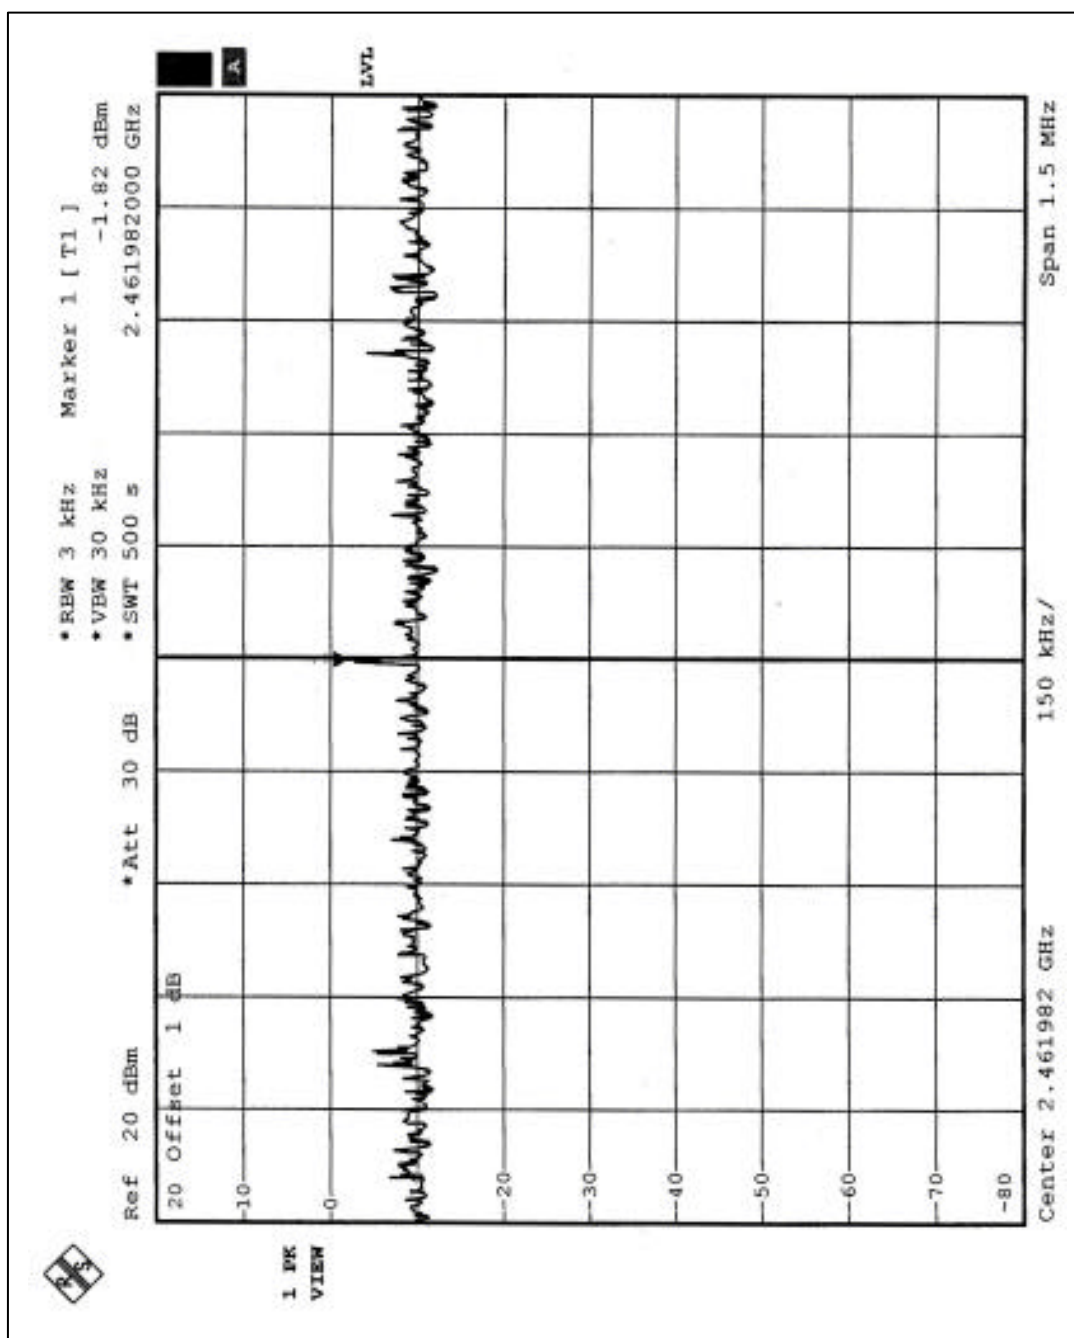


## 4.5.7 TEST RESULTS-OFDM


<b>EUT</b>	Wireless miniPCI 802.11 g/b adapter		
<b>MODEL</b>	WN4402A	<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60 %RH, 965 hPa
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>TESTED BY</b>	Eric Lee

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-9.23	8	PASS
6	2437	-9.26	8	PASS
11	2462	-9.90	8	PASS


CH1

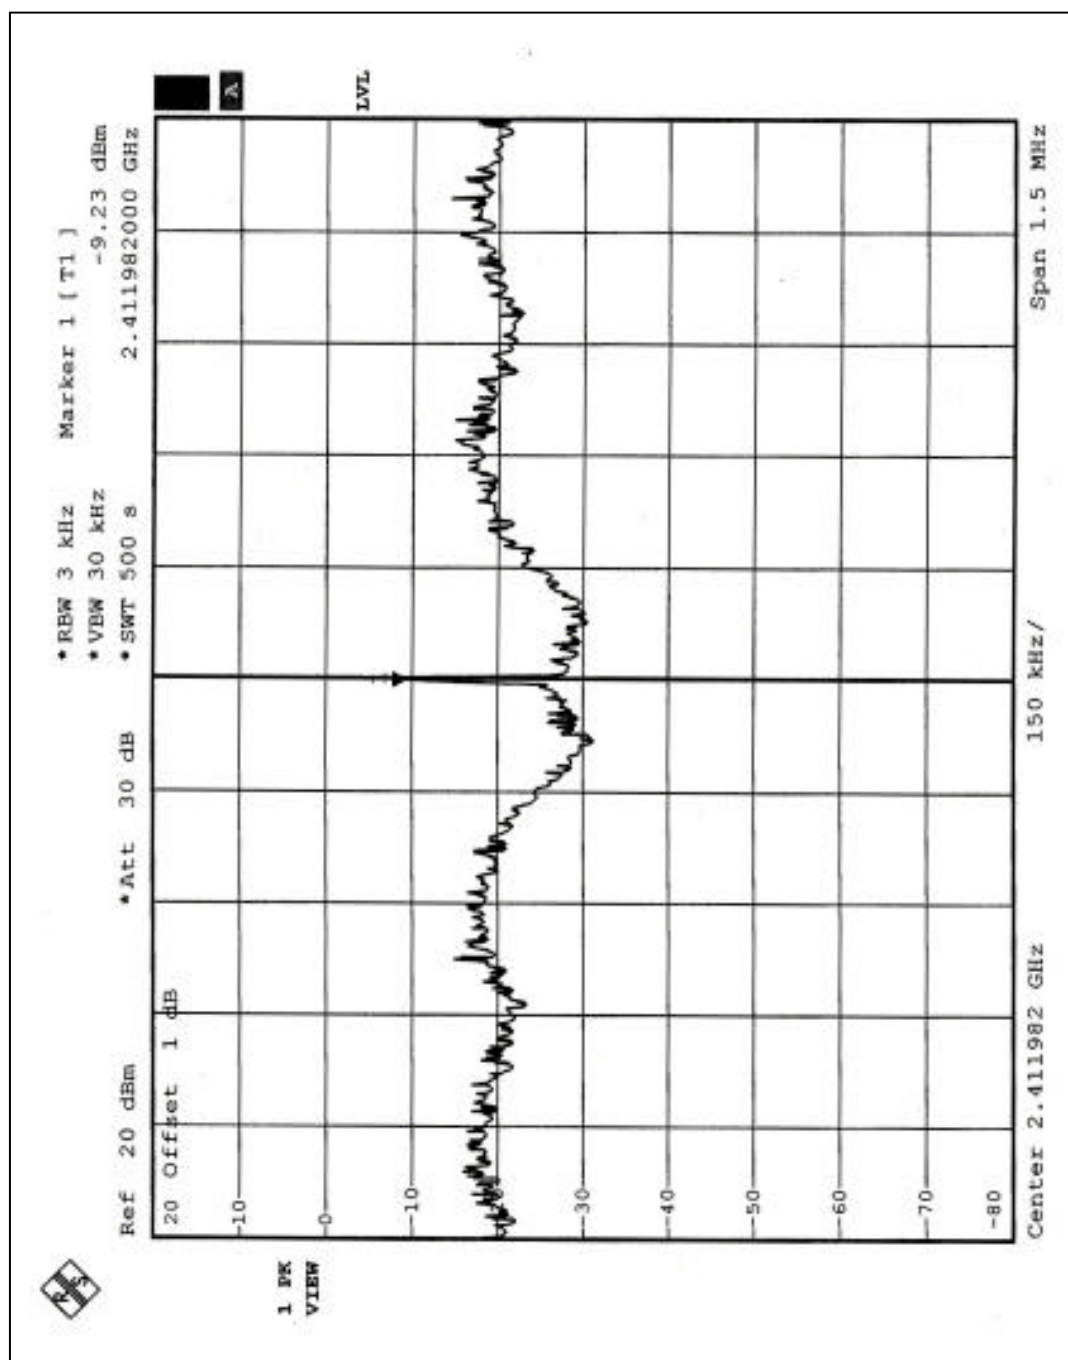

CH6

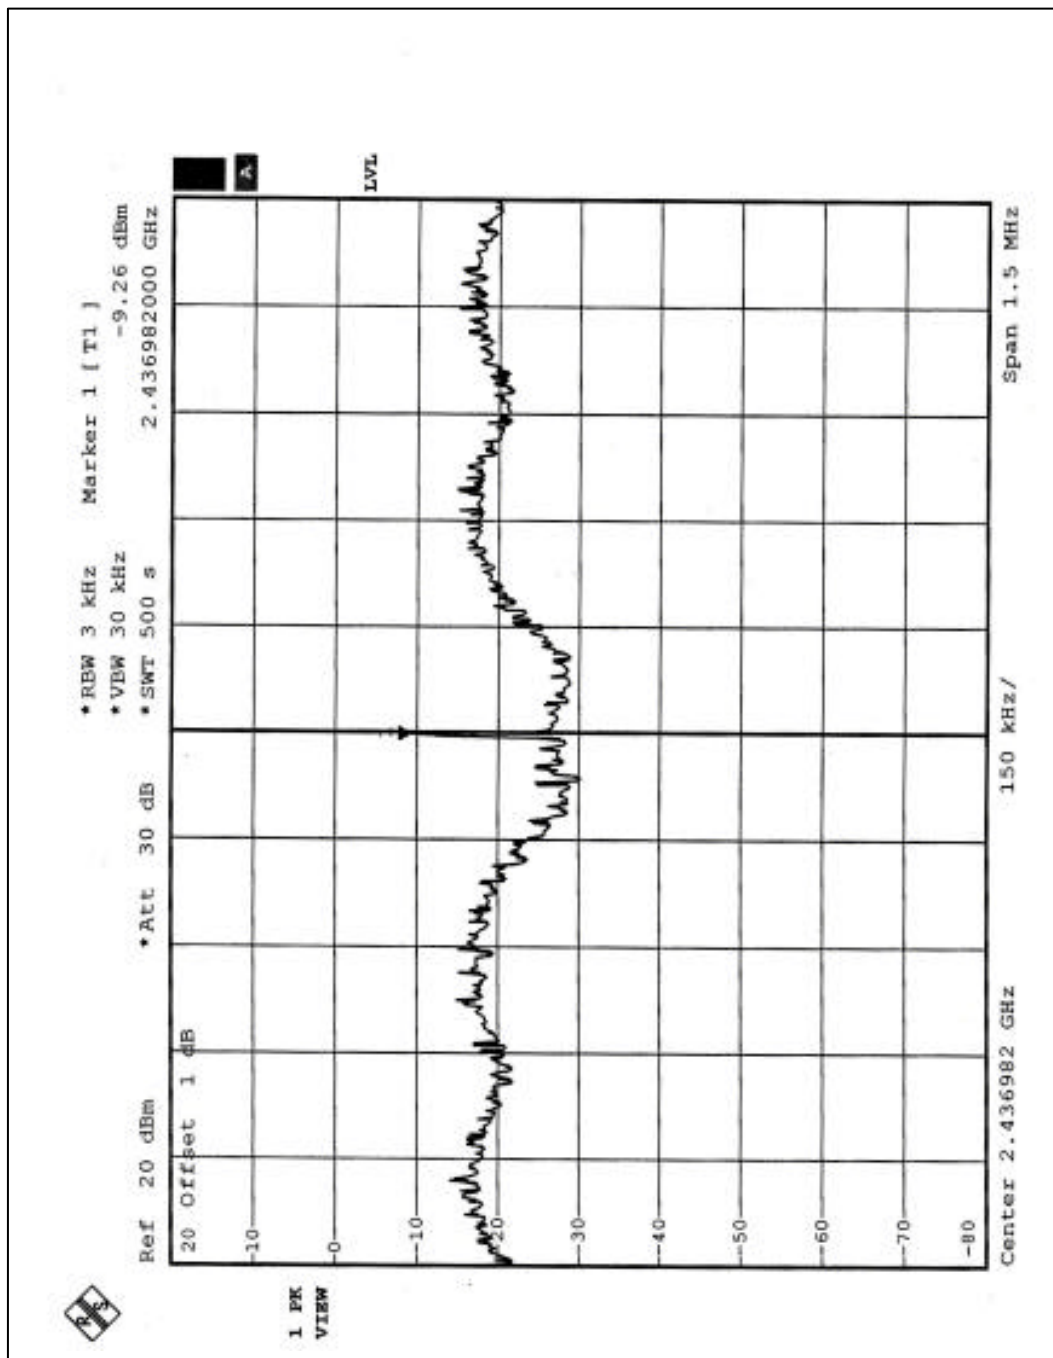

CH11

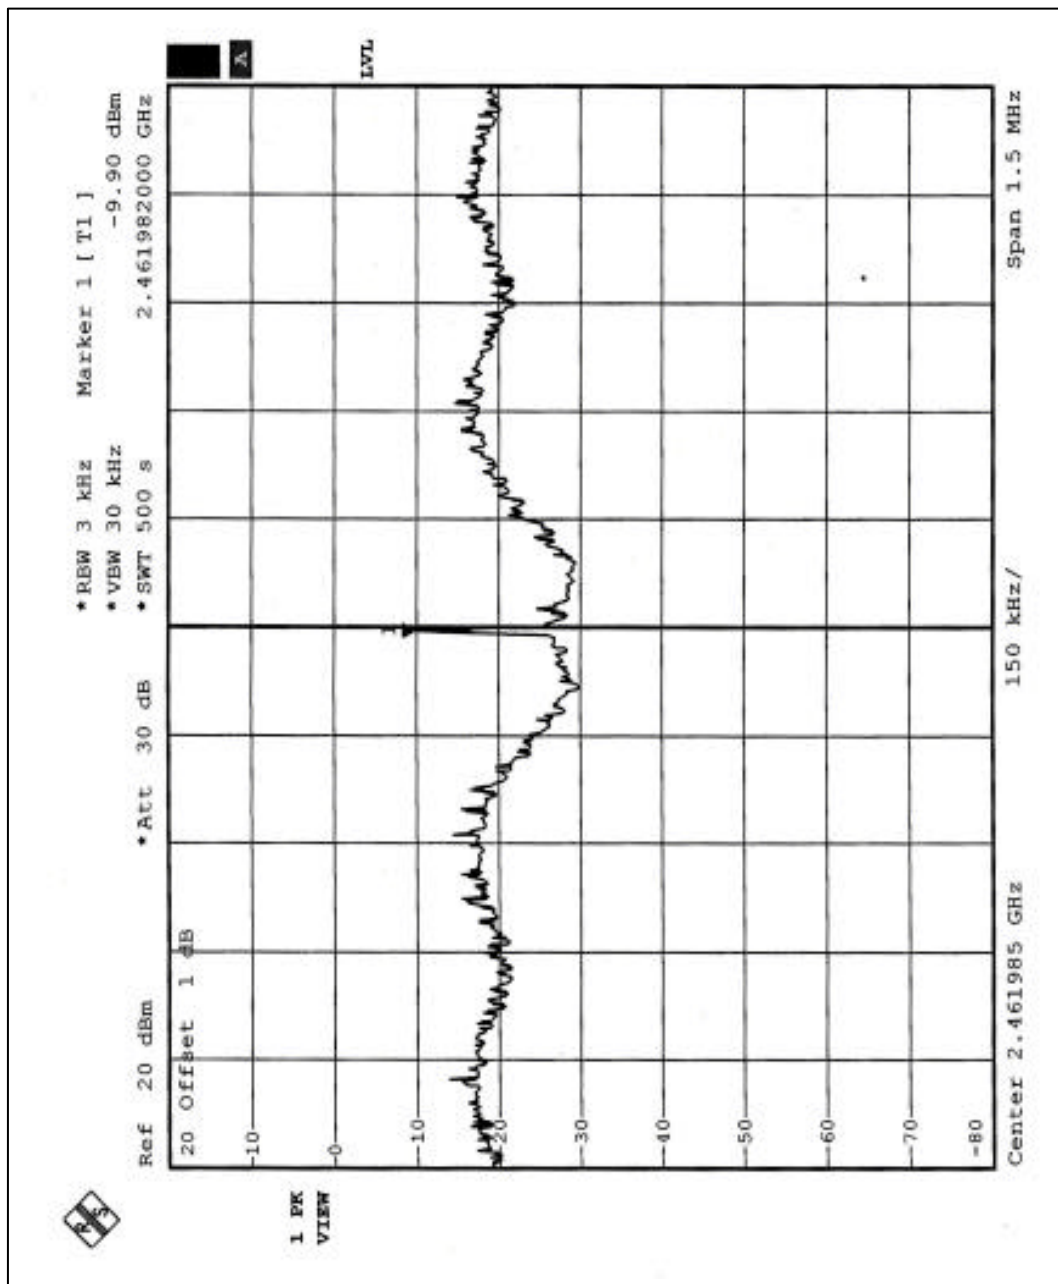

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 EUT OPERATING CONDITION


Same as Item 4.3.5


#### 4.6.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

**NOTE (1):** The band edge emission plot on the following first page shows 51.27dB delta between carrier maximum power and local maximum emission in restrict band (2.3860GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 94.3dBuV/m, so the maximum field strength in restrict band is  $94.3 - 51.27 = 43.03$ dBuV/m which is under 54 dBuV/m limit.

**NOTE (2):** The band edge emission plot on the following second page shows 50.56dB delta between carrier maximum power and local maximum emission in restrict band (2.4840GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 93.8dBuV/m, so the maximum field strength in restrict band is  $93.8 - 50.56 = 43.24$ dBuV/m which is under 54 dBuV/m limit.

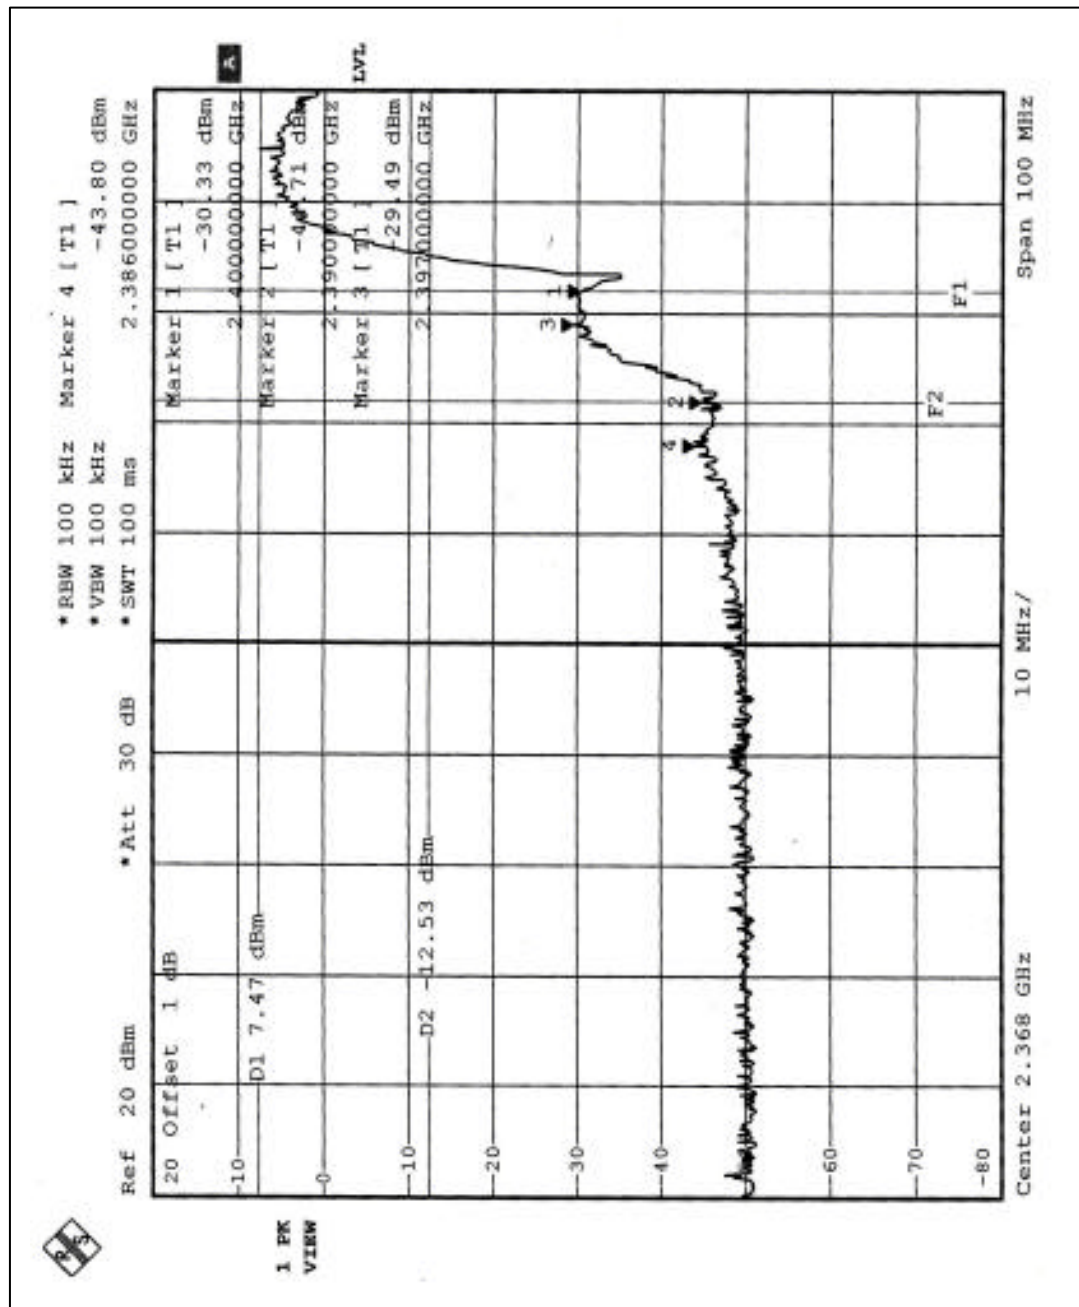

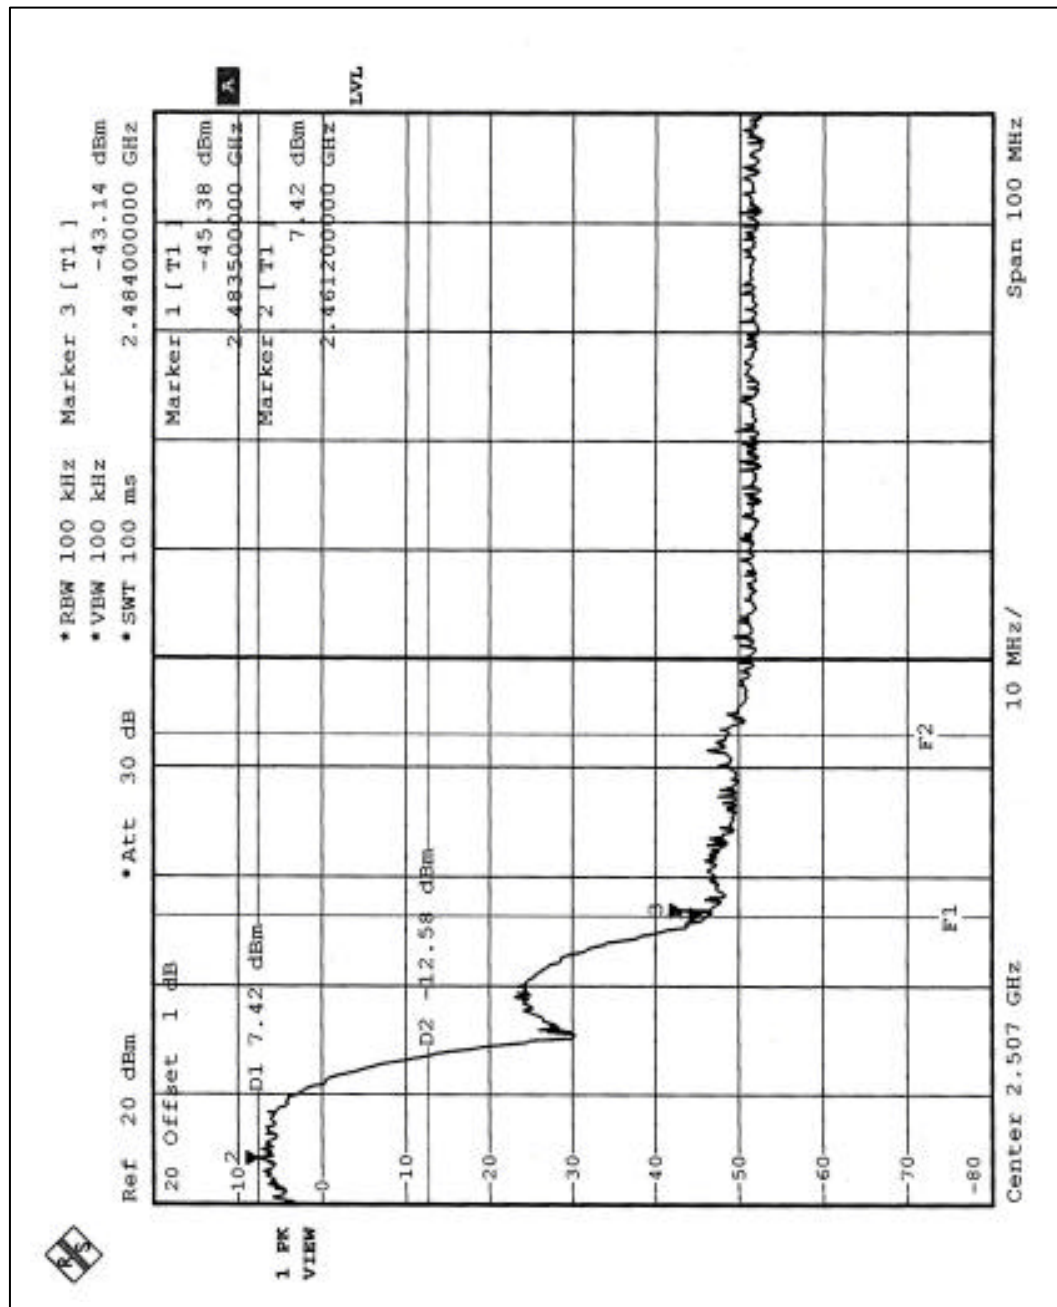



#### 4.6.6 TEST RESULTS-OFDM

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

**NOTE (1):** The band edge emission plot on the following first page shows 41.44dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 85.3dBuV/m, so the maximum field strength in restrict band is  $85.3 - 41.44 = 43.86$  dBuV/m which is under 54 dBuV/m limit.

**NOTE (2):** The band edge emission plot on the following second page shows 39.40dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 84.4dBuV/m, so the maximum field strength in restrict band is  $84.4 - 39.40 = 45.0$  dBuV/m which is under 54 dBuV/m limit.

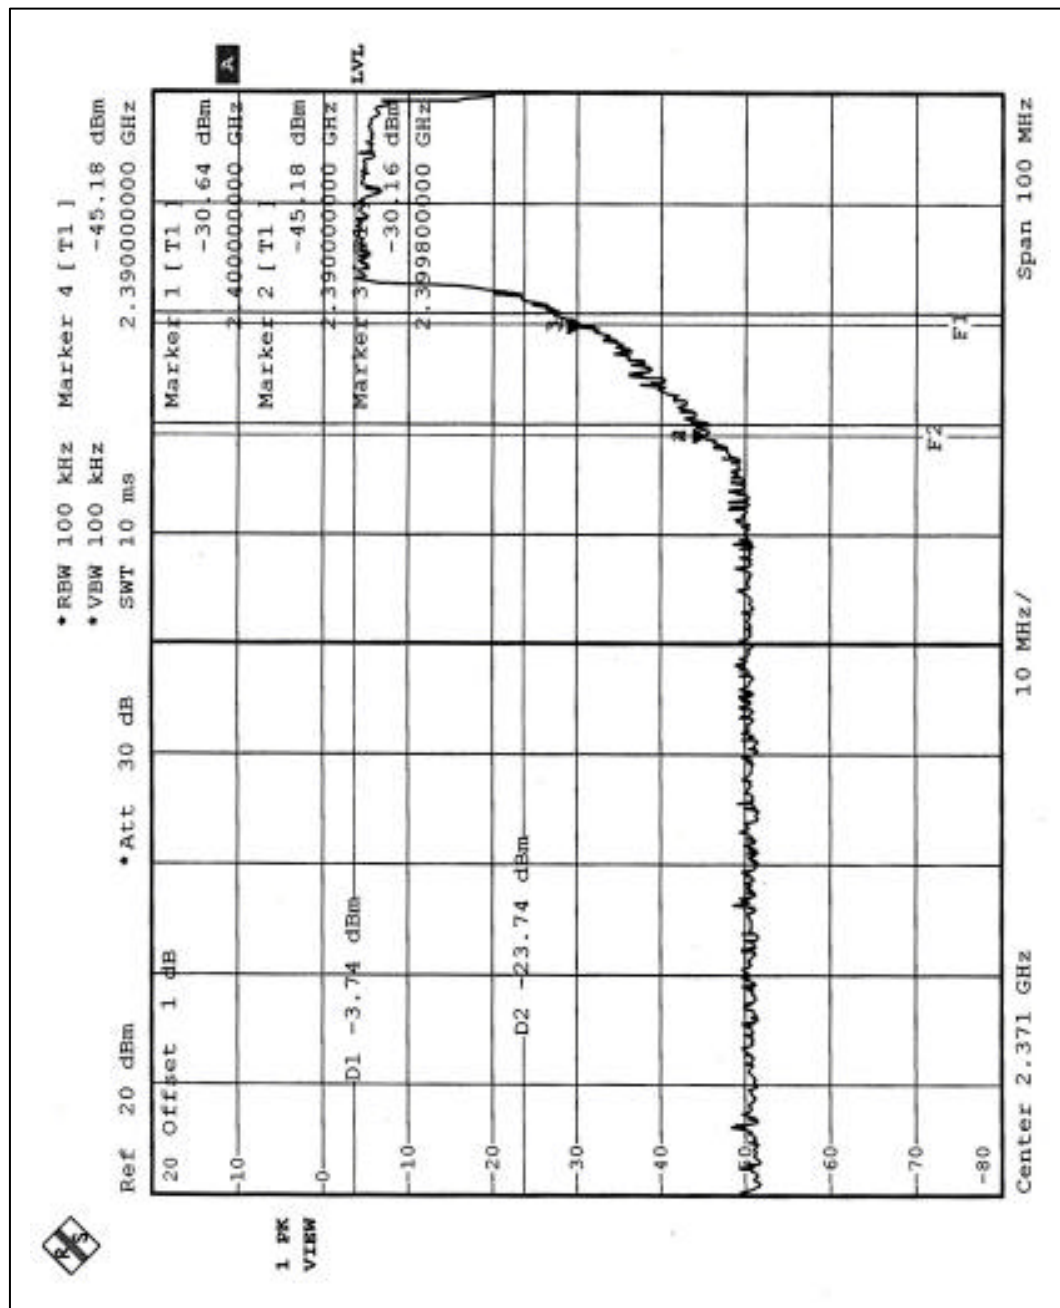

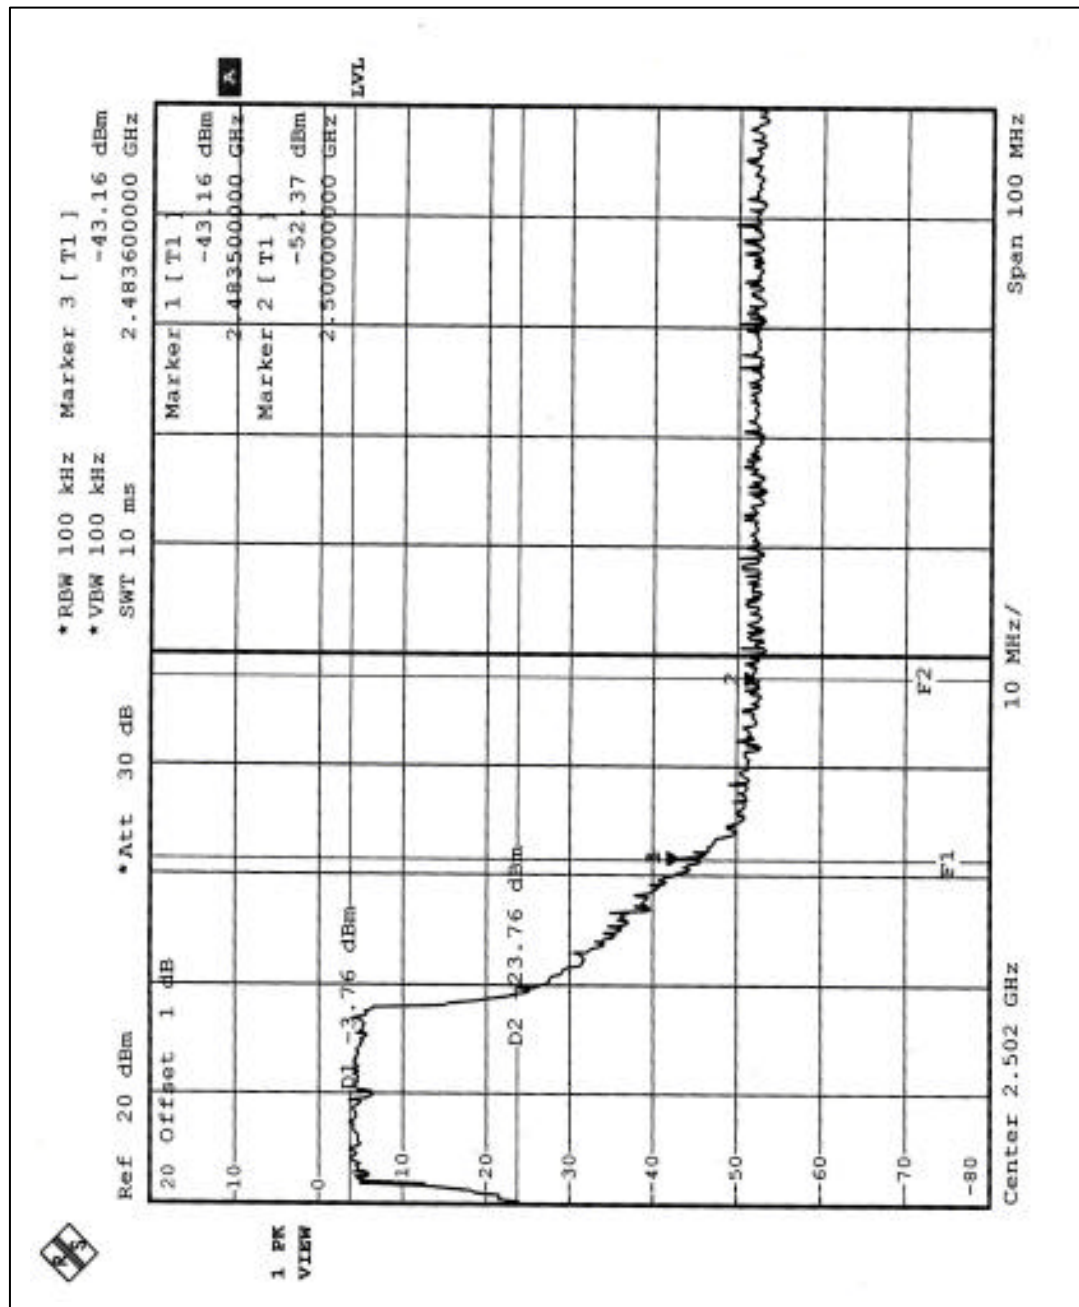



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna type used in this product is PIFA Antenna with MMCX connector. And the maximum Gain of this antenna is only 1.07dBi.

CONDUCTED EMISSION TEST



## RADIATED EMISSION TEST

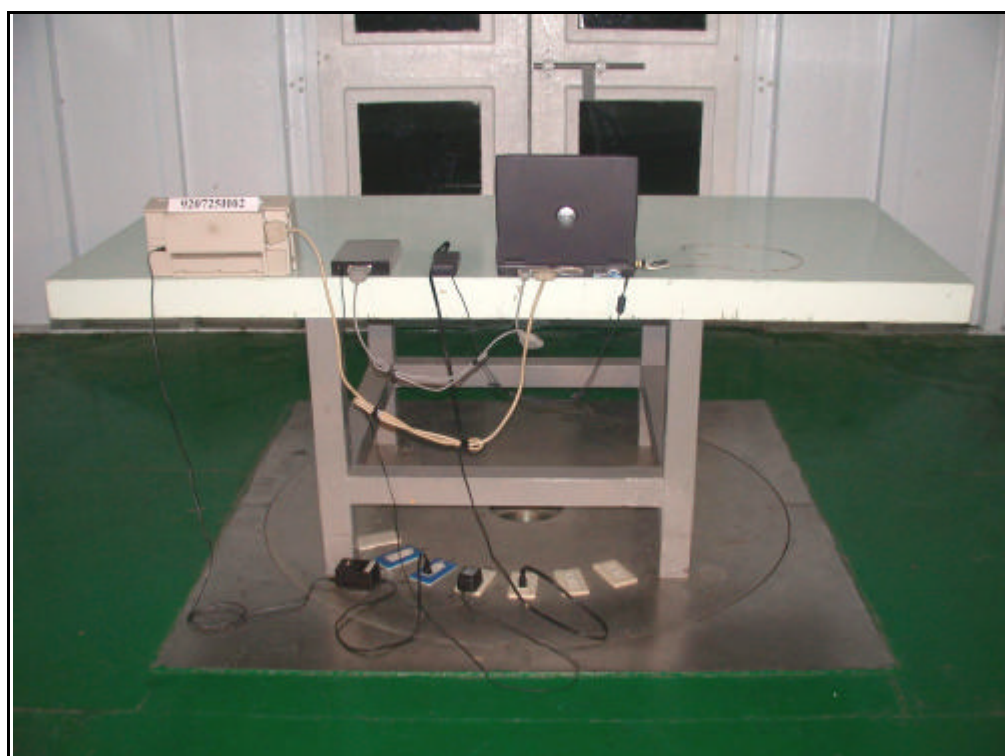





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA
<b>R.O.C.</b>	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.