




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	4F, No.9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.
FCC ID	RAXWN7522C

Product Name	802.11b/g/n Wireless Card
Brand Name	Arcadyan
Model Name	WN7522C_1-LF-19
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Feb. 06, 2009
Final Test Date	Feb. 24, 2009
Submission Type	Original Equipment

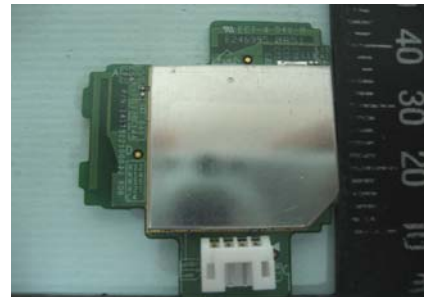

Statement

Test result included in this report is for the Draft n and 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	8
3.8. Table for Parameters of Test Software Setting	9
3.9. Test Configurations	10
4. TEST RESULT	12
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	16
4.3. Power Spectral Density Measurement	29
4.4. 6dB Spectrum Bandwidth Measurement	38
4.5. Radiated Emissions Measurement	47
4.6. Band Edge Emissions Measurement	77
4.7. Antenna Requirements	86
5. LIST OF MEASURING EQUIPMENTS	87
6. TEST LOCATION.....	89
7. TAF CERTIFICATE OF ACCREDITATION	90
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A3
APPENDIX B. TEST PHOTOS.....	B1 ~ B6
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3

History of This Test Report

Original Issue Date: Feb. 24, 2009

Report No.: FR920620

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n Wireless Card
Brand Name : Arcadyan
Model Name : WN7522C_1-LF-19
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 06, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Wayne Hsu 2009.2.24', is written over a horizontal line.

Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	8.27 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	6.30 dB
4.3	15.247(e)	Power Spectral Density	Complies	8.66 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.87 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.30 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Draft n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz) : 17.28 MHz MCS8 (40MHz) : 35.36 MHz
Conducted Output Power	MCS8 (20MHz) : 23.70 dBm MCS8 (40MHz) : 18.72 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11b/g

Items	Description
Product Type	802.11b/g :WLAN (1TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 10.16 MHz ; 11g: 16.36 MHz
Conducted Output Power	11b: 19.56 dBm ; 11g: 21.03 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
802.11b	V	X	X	X
802.11g	V	X	X	X
Draft n	X	X	V	V

Draft n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

NA

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A (0)	-	-	PCB Printed Antenna	N/A	1.5	TX / RX Ant.
B (1)	-	-	PCB Printed Antenna	N/A	1.5	TX / RX Ant.

Note: The EUT has two antennas (2TX, 2RX).


For 802.11b/g mode:

Only antenna A can be used as transmitting antenna.

Both antenna A and B can be used as receiving antenna.

For Draft n mode:

Ant. A & Ant. B could transmit/receive simultaneously.

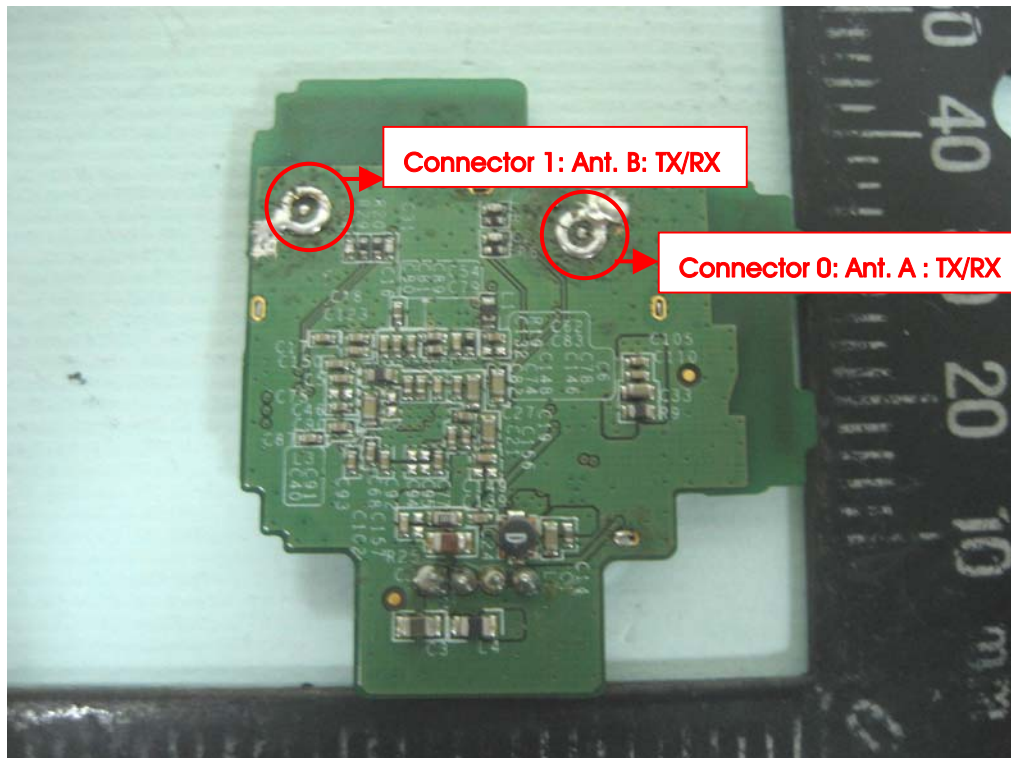

3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS8/20MHz	13 Mbps	1/6/11	A / B / A+B
	MCS8/40MHz	27 Mbps	3/6/9	A / B / A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Power Spectral Density 6dB Spectrum Bandwidth	MCS8/20MHz	13 Mbps	1/6/11	A+B
	MCS8/40MHz	27 Mbps	3/6/9	A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	MCS8/20MHz	13 Mbps	1/6/11	A+B
	MCS8/40MHz	27 Mbps	3/6/9	A+B
	11b/BPSK	1 Mbps	1/6/11	A
	11g/BPSK	6 Mbps	1/6/11	A
Band Edge Emissions	MCS8/20MHz	13 Mbps	1/11	A+B
	MCS8/40MHz	27 Mbps	3/9	A+B

	11b/BPSK	1 Mbps	1/11	A
	11g/BPSK	6 Mbps	1/11	A

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG
Mouse	HP	M-UAE96	DoC
Wireless AP	Planex	GW-AP54SGX	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Draft n MCS8 20MHz

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n Ant. A+ Ant. B	12	18	14

Power Parameters of Draft n MCS8 40MHz

Test Software Version	DOS		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n Ant. A+ Ant. B	14	14	13

Power Parameters of IEEE 802.11b/g

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. A	19	19	18
IEEE 802.11g Ant. A	15	19	15


During the test, "Ping.exe" under WIN XP was executed to link with the remote workstation to receive and transmit signal by WLAN

At the same time, "DOS" was executed the test program to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 30KHz~1GHz

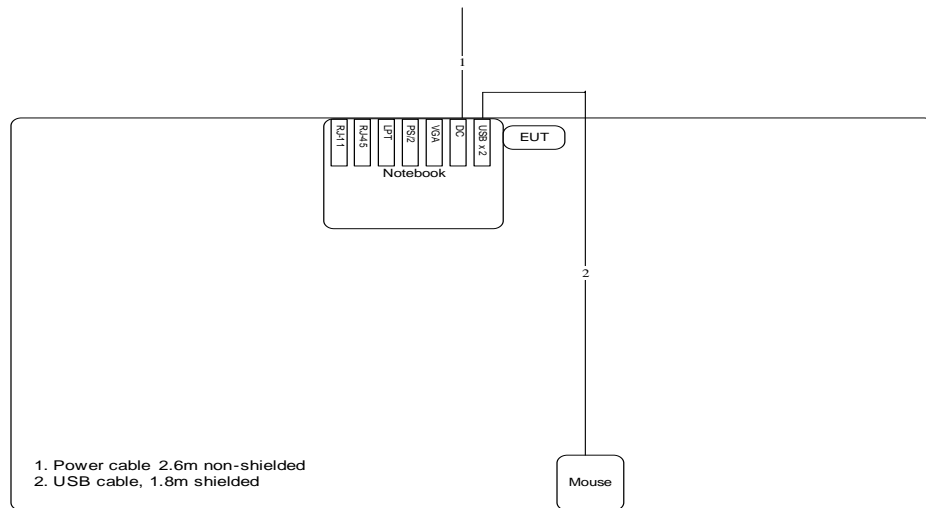

Test Configuration: above 1GHz

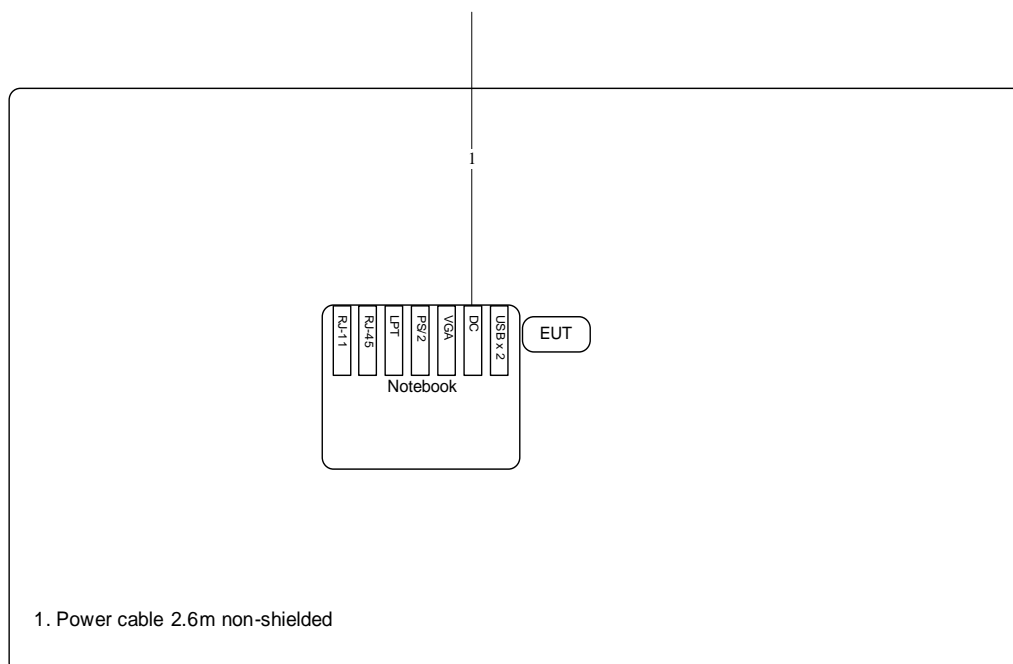

3.9.2. AC Power Line Conduction Emissions Test Configuration

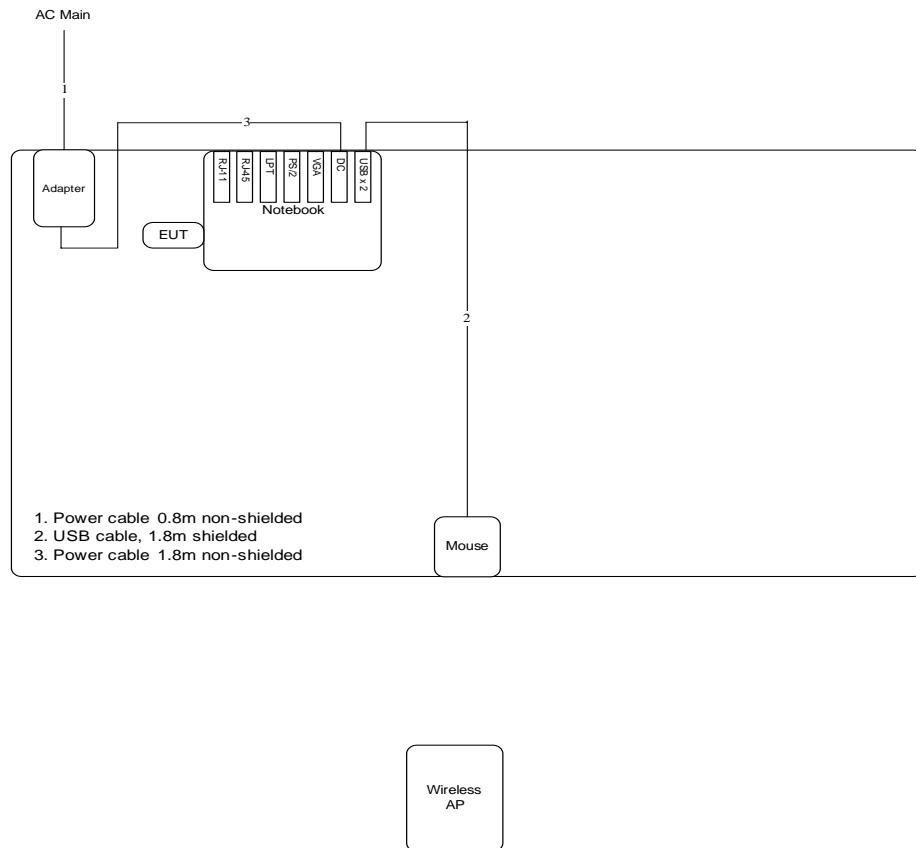

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

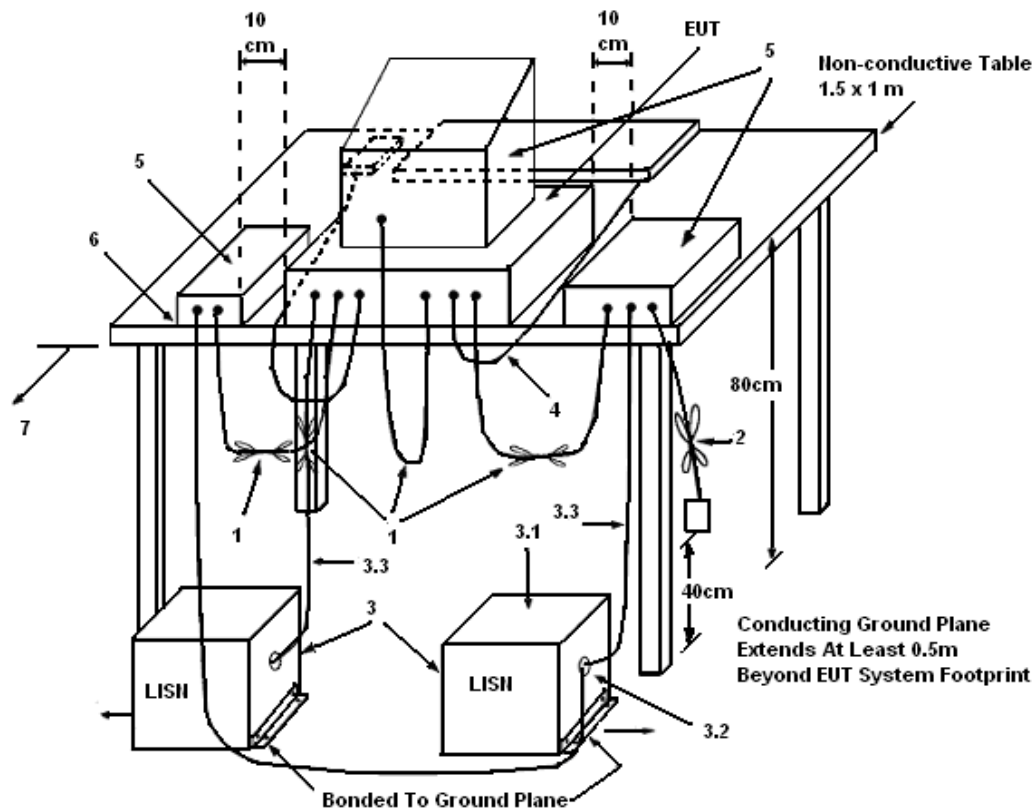

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24.3°C	Humidity	56.4%
Test Engineer	Howar Sung	Phase	Line
Configuration	Normal Link		

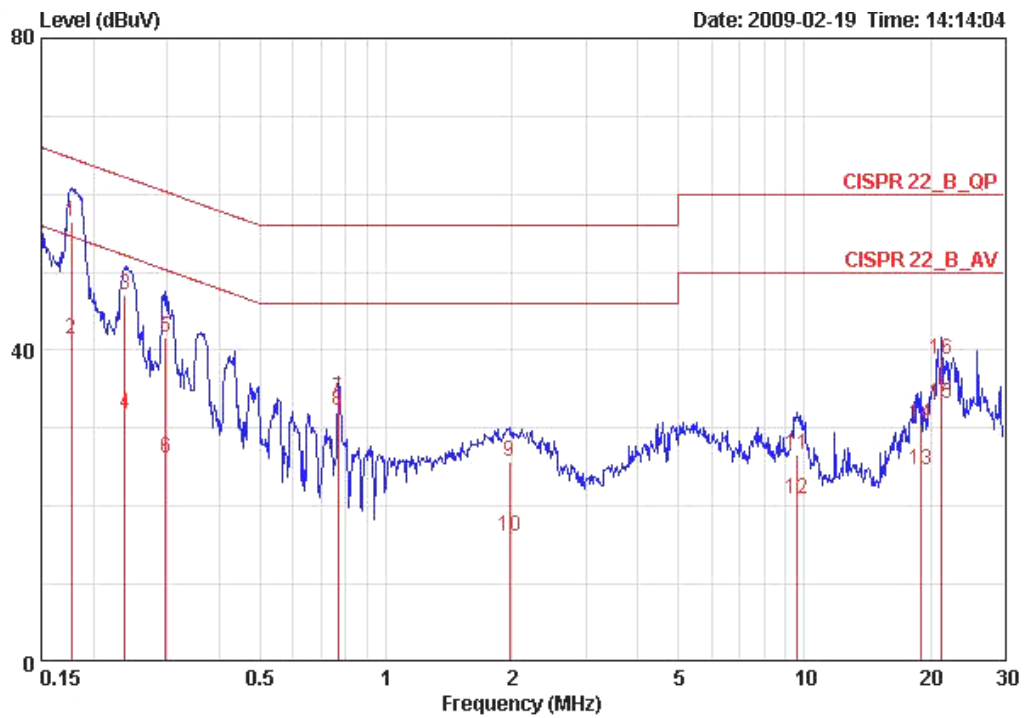

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17678	56.37	-8.27	64.64	56.11	0.06	0.20	QP
2	0.17678	41.48	-13.16	54.64	41.22	0.06	0.20	AVERAGE
3	0.23750	47.01	-15.17	62.18	46.77	0.04	0.20	QP
4	0.23750	31.90	-20.28	52.18	31.66	0.04	0.20	AVERAGE
5	0.29792	41.63	-18.67	60.30	41.39	0.04	0.20	QP
6	0.29792	26.16	-24.14	50.30	25.92	0.04	0.20	AVERAGE
7	0.76910	33.75	-22.25	56.00	33.52	0.03	0.20	QP
8	0.76910	32.29	-13.71	46.00	32.06	0.03	0.20	AVERAGE
9	1.970	25.67	-30.33	56.00	25.43	0.05	0.19	QP
10	1.970	16.14	-29.86	46.00	15.90	0.05	0.19	AVERAGE
11	9.552	26.49	-33.51	60.00	25.85	0.34	0.30	QP
12	9.552	20.96	-29.04	50.00	20.32	0.34	0.30	AVERAGE
13	18.913	24.58	-25.42	50.00	23.31	0.77	0.50	AVERAGE
14	18.913	30.56	-29.44	60.00	29.29	0.77	0.50	QP
15	21.252	33.20	-16.80	50.00	31.79	0.91	0.50	AVERAGE
16	21.252	38.80	-21.20	60.00	37.39	0.91	0.50	QP

Temperature	24.3°C	Humidity	56.4%
Test Engineer	Howar Sung	Phase	Neutral
Configuration	Normal Link		

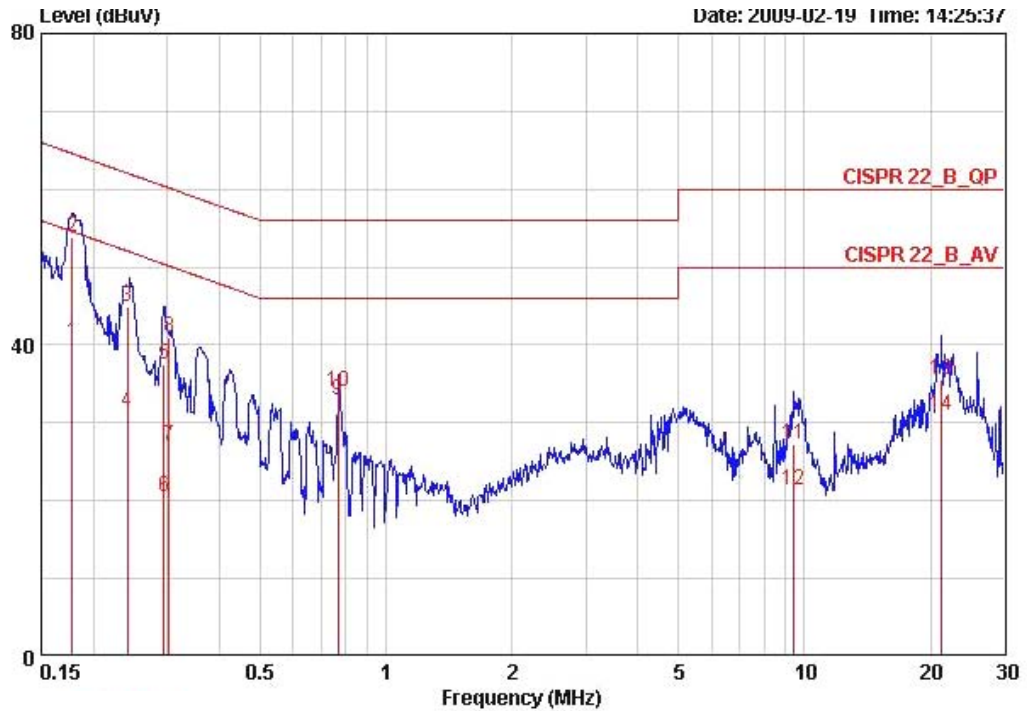

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17801	40.38	-14.20	54.58	40.09	0.09	0.20	AVERAGE
2	0.17801	53.92	-10.66	64.58	53.63	0.09	0.20	QP
3	0.24102	44.80	-17.26	62.06	44.52	0.08	0.20	QP
4	0.24102	31.35	-20.71	52.06	31.07	0.08	0.20	AVERAGE
5	0.29398	37.43	-22.98	60.41	37.16	0.07	0.20	QP
6	0.29398	20.48	-29.93	50.41	20.21	0.07	0.20	AVERAGE
7	0.30318	27.06	-23.09	50.16	26.79	0.07	0.20	AVERAGE
8	0.30318	40.87	-19.28	60.16	40.60	0.07	0.20	QP
9	0.76830	32.85	-13.15	46.00	32.58	0.07	0.20	AVERAGE
10	0.76830	34.01	-21.99	56.00	33.74	0.07	0.20	QP
11	9.456	27.32	-32.68	60.00	26.65	0.37	0.30	QP
12	9.456	21.41	-28.59	50.00	20.74	0.37	0.30	AVERAGE
13	21.260	35.47	-24.53	60.00	34.06	0.91	0.50	QP
14	21.260	30.95	-19.05	50.00	29.54	0.91	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

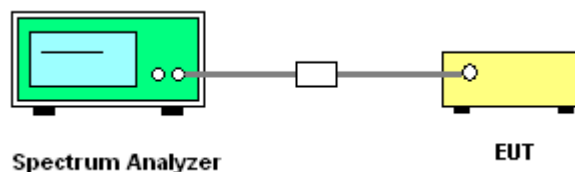

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n
Test Date	Feb. 23, 2009		

Configuration Draft n MCS8 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.89	30.00	Complies
6	2437 MHz	20.40	30.00	Complies
11	2462 MHz	16.11	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.60	30.00	Complies
6	2437 MHz	20.97	30.00	Complies
11	2462 MHz	16.18	30.00	Complies

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.27	30.00	Complies
6	2437 MHz	23.70	30.00	Complies
11	2462 MHz	19.16	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.46	30.00	Complies
6	2437 MHz	15.13	30.00	Complies
9	2452 MHz	14.51	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.94	30.00	Complies
6	2437 MHz	15.29	30.00	Complies
9	2452 MHz	14.73	30.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	18.72	30.00	Complies
6	2437 MHz	18.22	30.00	Complies
9	2452 MHz	17.63	30.00	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	802.11b/g
Test Date	Feb. 23, 2009		


Configuration IEEE 802.11b Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.56	30.00	Complies
6	2437 MHz	18.91	30.00	Complies
11	2462 MHz	17.39	30.00	Complies

Configuration IEEE 802.11g Ant. A


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.05	30.00	Complies
6	2437 MHz	21.03	30.00	Complies
11	2462 MHz	16.60	30.00	Complies

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2412 MHz

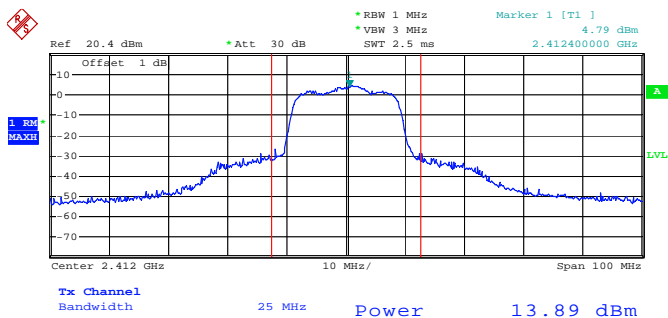


Date: 23.FEB.2009 19:19:06

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2437 MHz

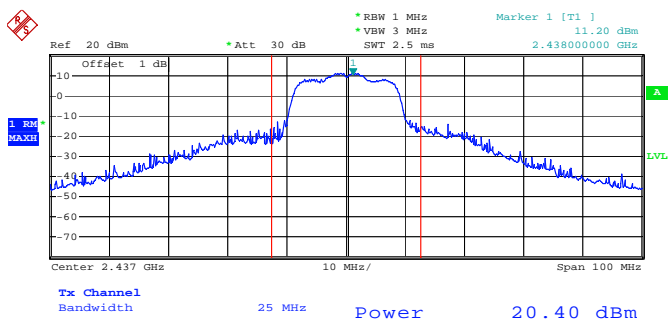


Date: 23.FEB.2009 19:24:19

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 2462 MHz

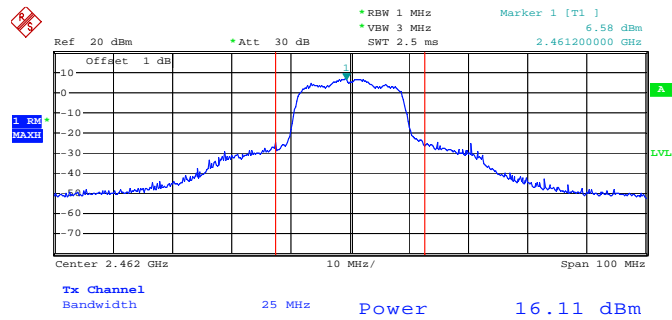


Date: 23.FEB.2009 19:25:30

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2412 MHz

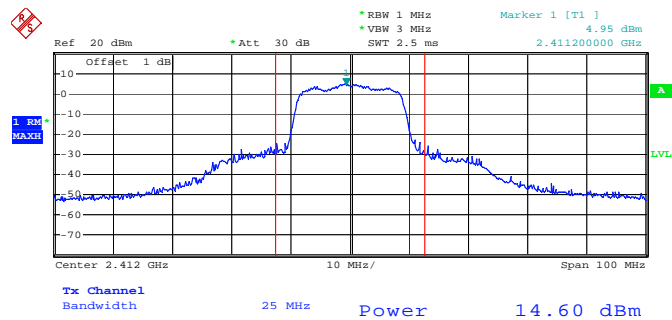


Date: 23.FEB.2009 19:22:14

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2437 MHz

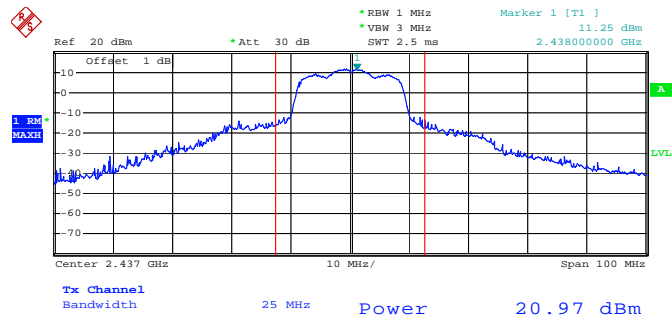


Date: 23.FEB.2009 19:23:37

Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 2462 MHz

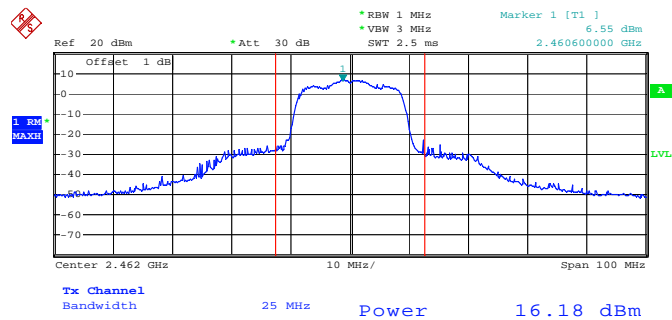


Date: 23.FEB.2009 19:24:59

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2422 MHz

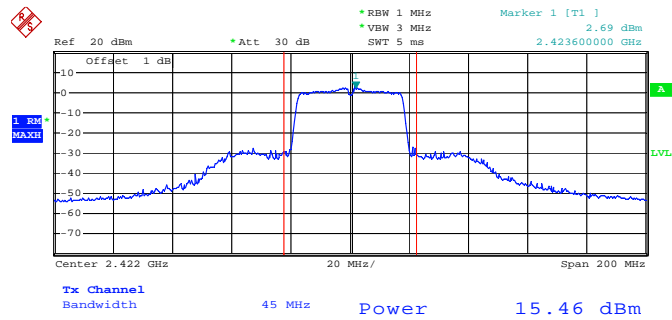


Date: 23.FEB.2009 19:26:54

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2437 MHz

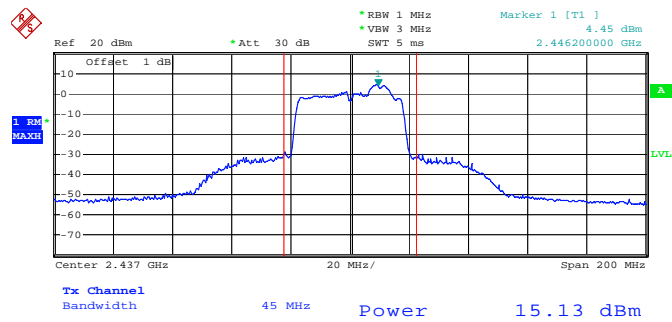


Date: 23.FEB.2009 19:44:17

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 2452 MHz

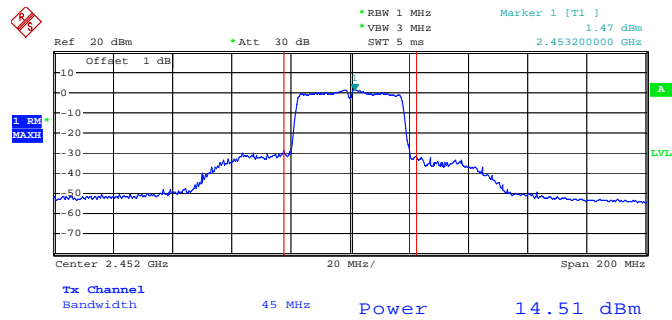


Date: 23.FEB.2009 19:47:14

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2422 MHz

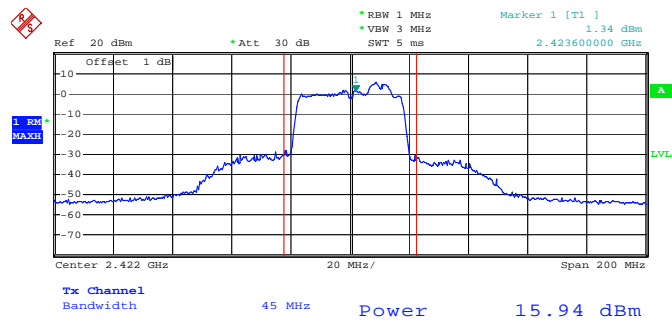


Date: 23.FEB.2009 19:40:02

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2437 MHz

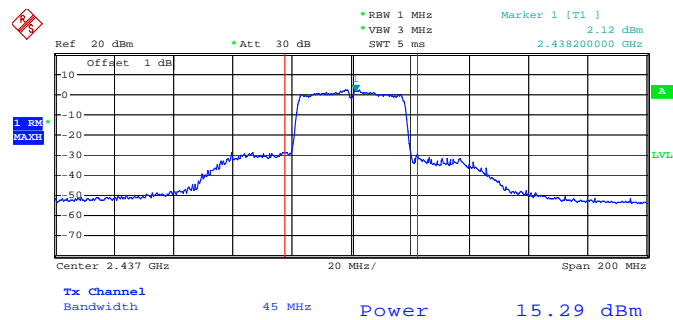


Date: 23.FEB.2009 19:45:31

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 2452 MHz

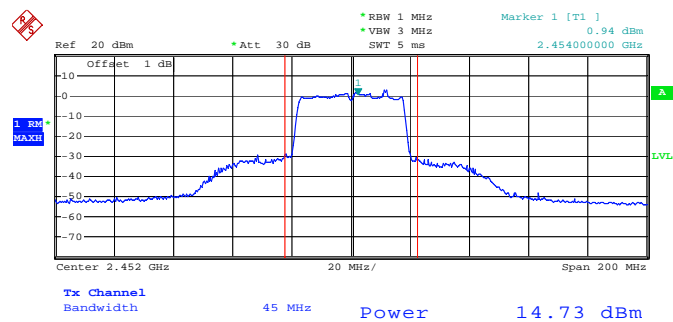


Date: 23.FEB.2009 19:48:20

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

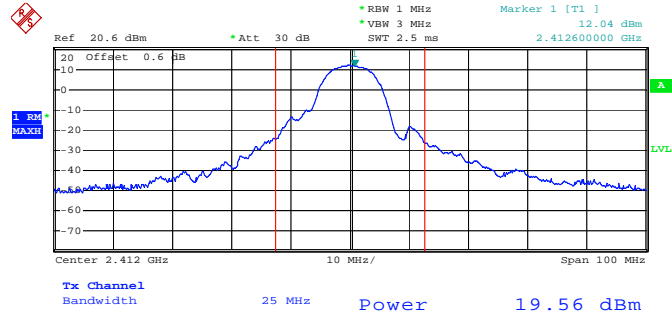


Date: 23.FEB.2009 18:36:25

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

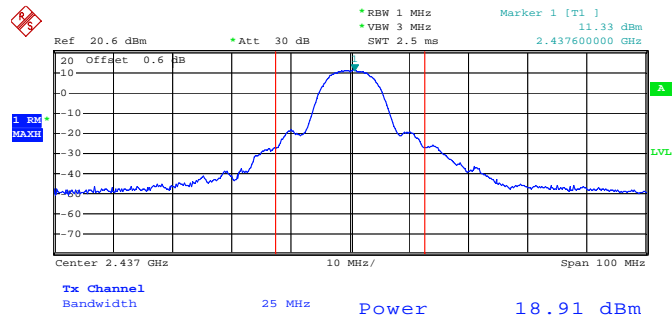


Date: 23.FEB.2009 18:40:00

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

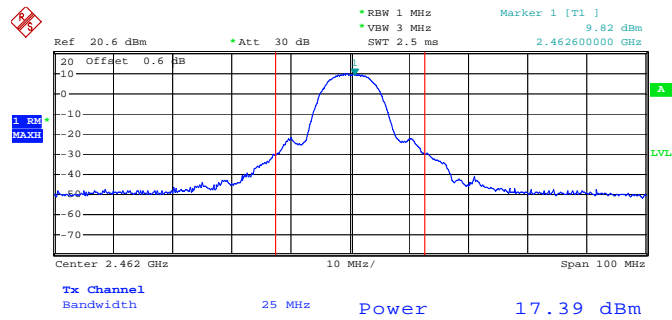


Date: 23.FEB.2009 18:40:44

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

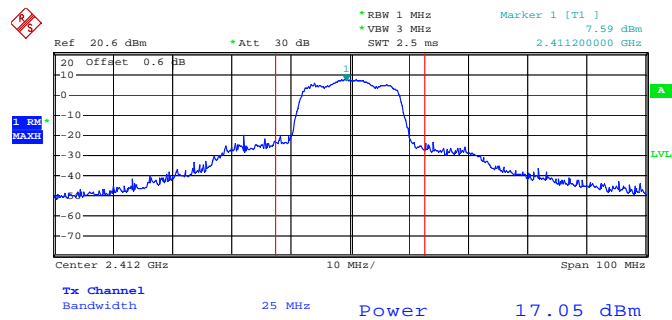


Date: 23.FEB.2009 18:43:02

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

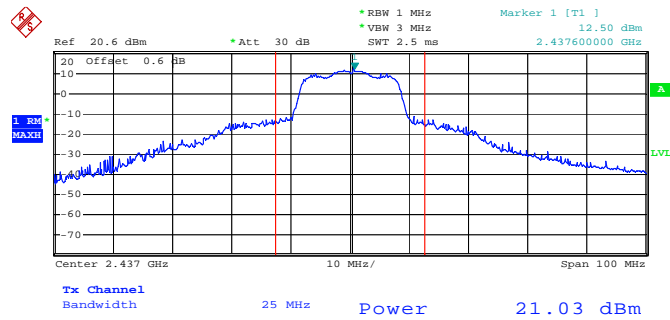

Date: 23.FEB.2009 18:43:39

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

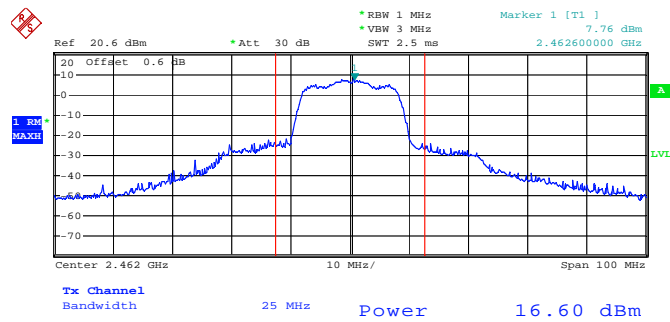

Date: 23.FEB.2009 18:44:34

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

4.3.4. Test Setup Layout

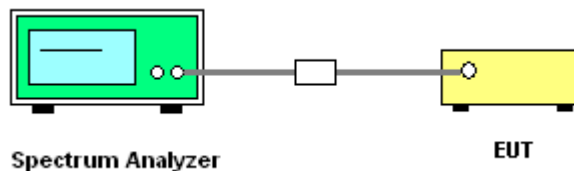

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n
Test Date	Feb. 24, 2009		

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-13.70	8.00	Complies
6	2437 MHz	-10.62	8.00	Complies
11	2462 MHz	-13.89	8.00	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
3	2422 MHz	-18.11	8.00	Complies
6	2437 MHz	-22.54	8.00	Complies
9	2452 MHz	-20.96	8.00	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	802.11b/g
Test Date	Feb. 24, 2009		


Configuration IEEE 802.11b Ant. A

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-0.66	8.00	Complies
6	2437 MHz	-2.45	8.00	Complies
11	2462 MHz	-1.81	8.00	Complies

Configuration IEEE 802.11g Ant. A


Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-3.70	8.00	Complies
6	2437 MHz	-6.91	8.00	Complies
11	2462 MHz	-11.16	8.00	Complies

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

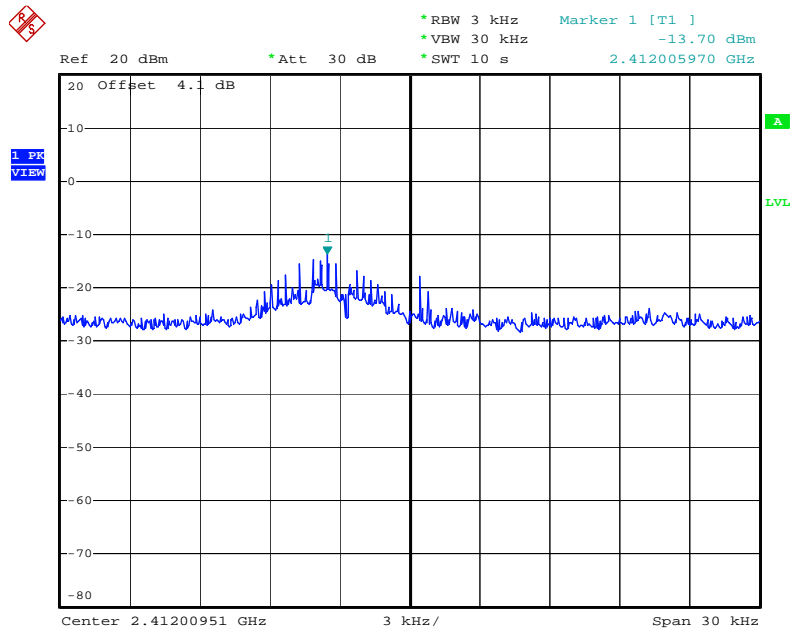


Date: 21.FEB.2009 09:37:27

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

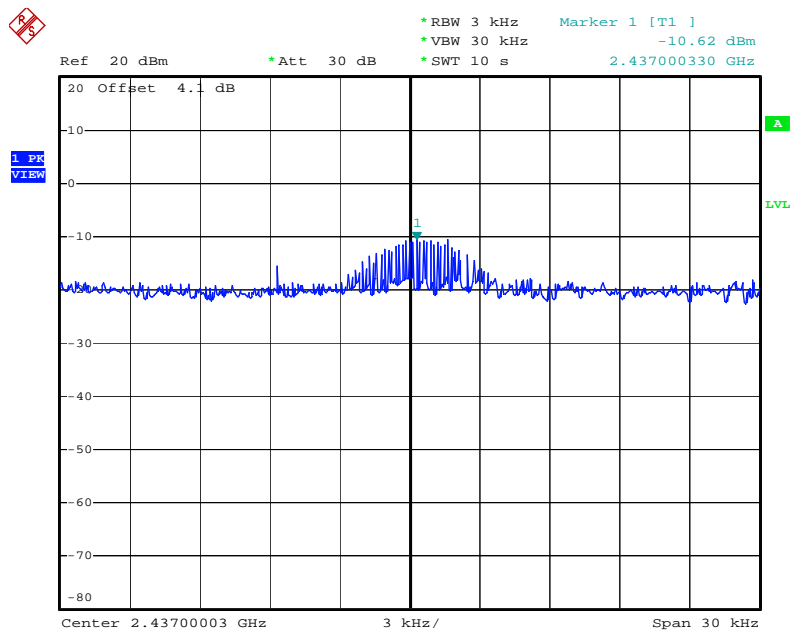


Date: 21.FEB.2009 09:40:53

Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

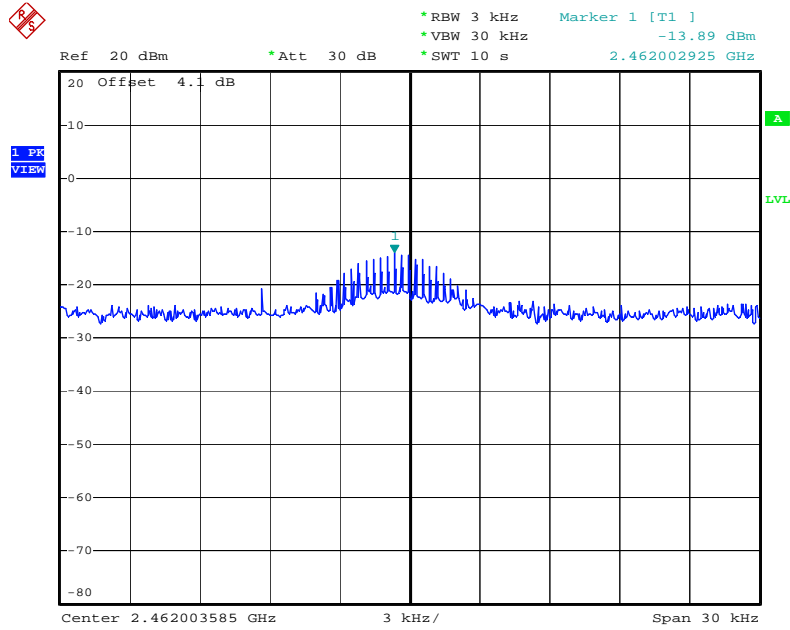


Date: 21.FEB.2009 09:43:50

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

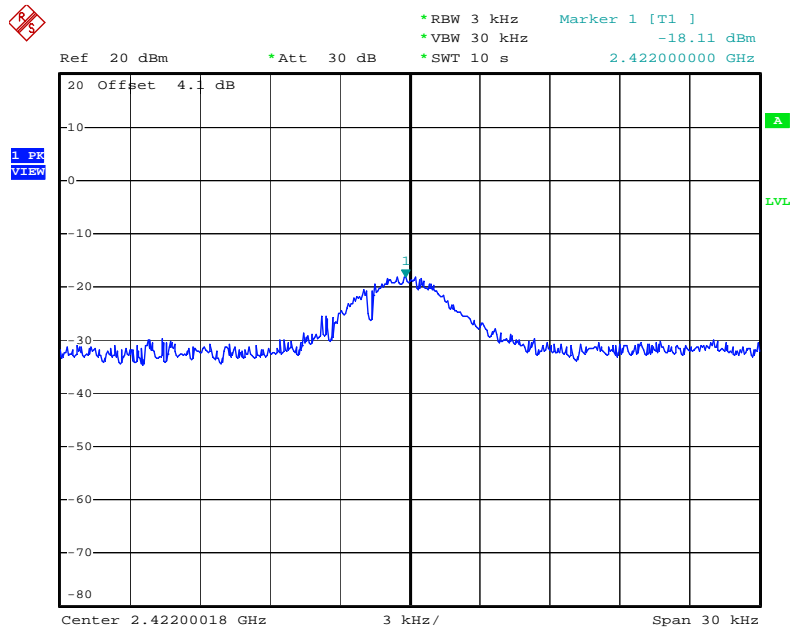


Date: 21.FEB.2009 09:47:14

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

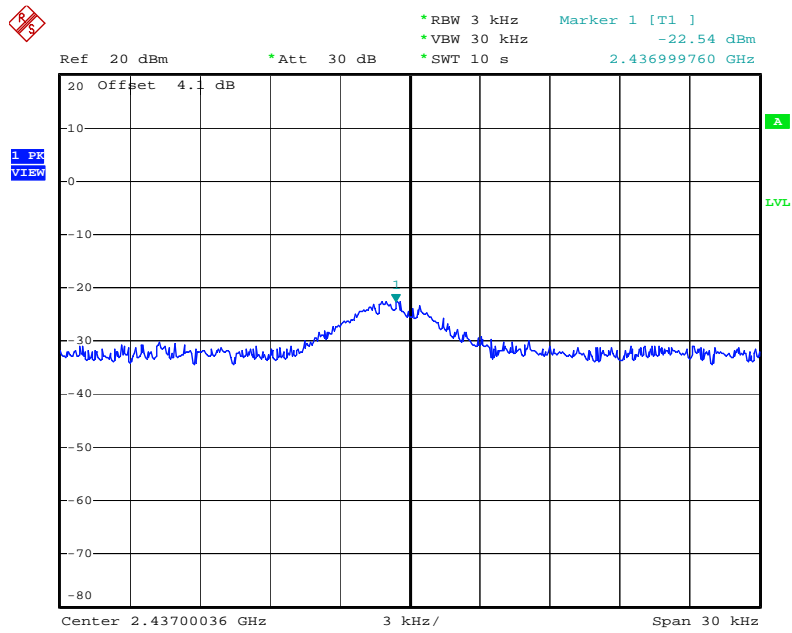


Date: 21.FEB.2009 09:49:32

Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

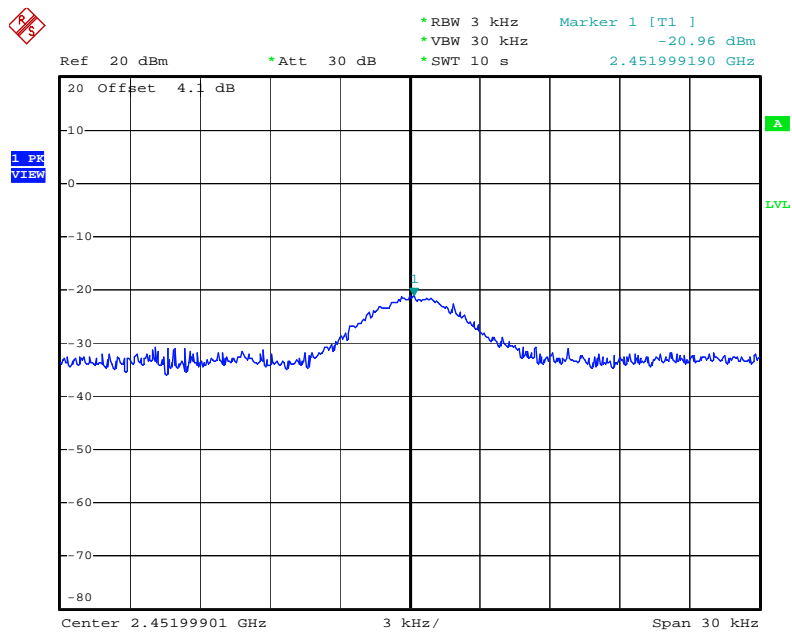


Date: 21.FEB.2009 09:53:47

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

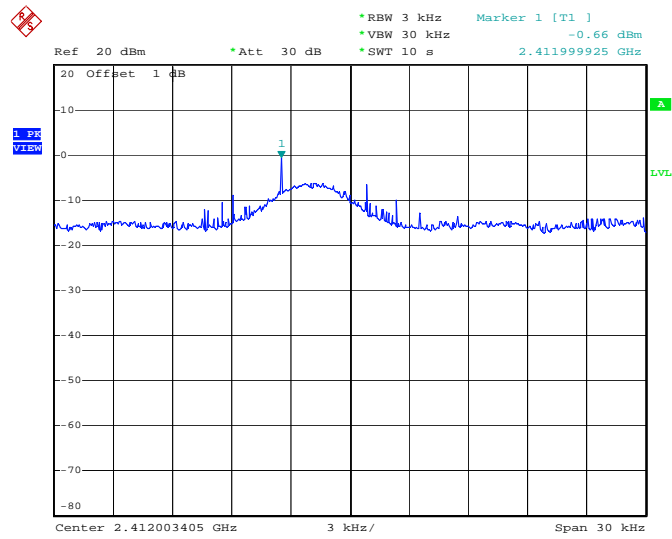


Date: 23.FEB.2009 20:43:31

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

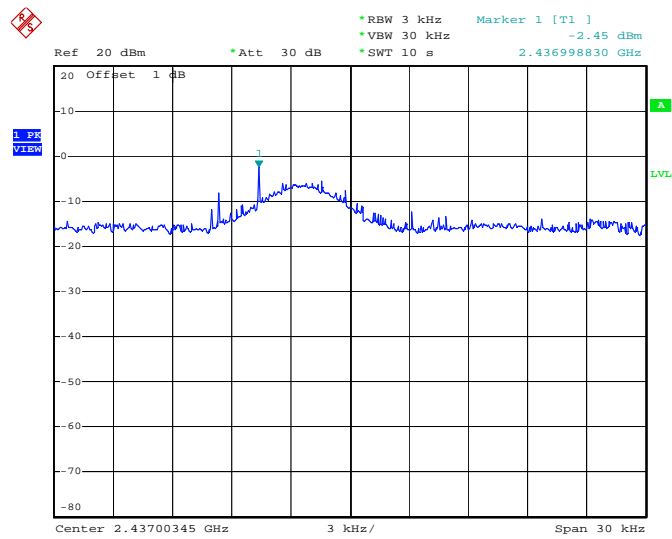


Date: 23.FEB.2009 20:45:47

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

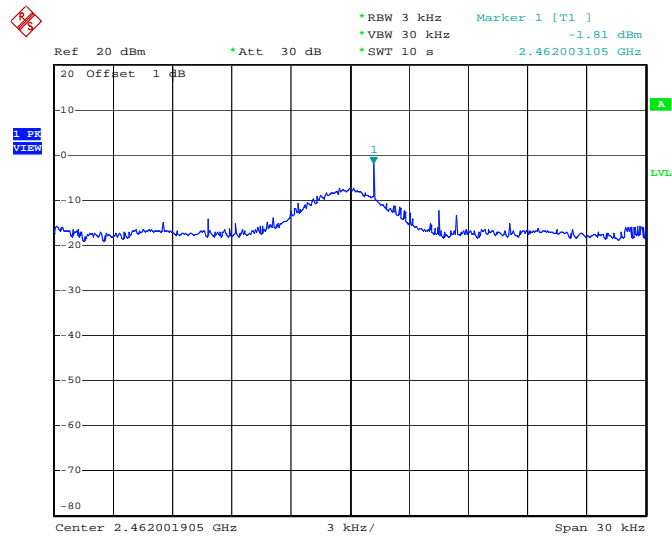


Date: 23.FEB.2009 20:47:50

Power Density Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

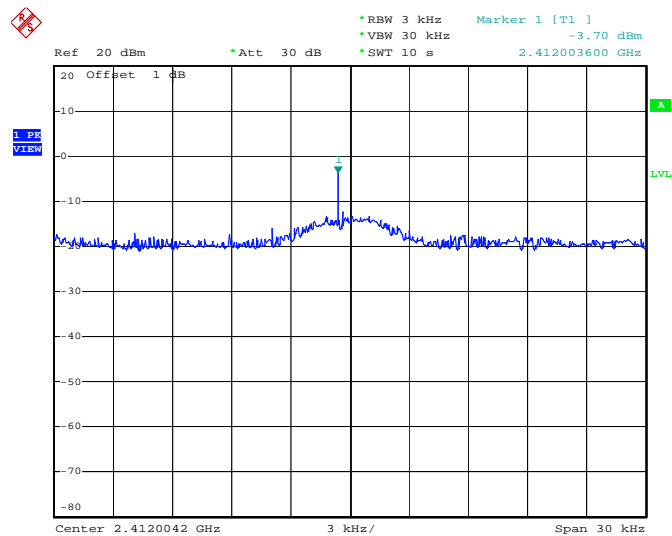


Date: 23.FEB.2009 20:35:44

Power Density Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

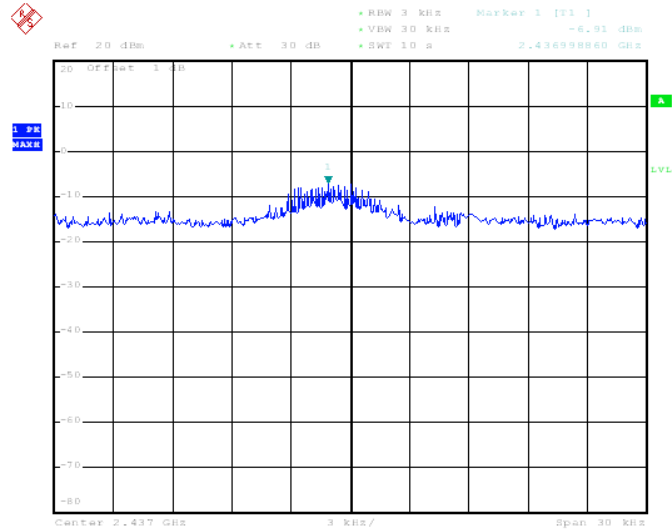

Date: 24.FEB.2009 14:19:21

Power Density Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

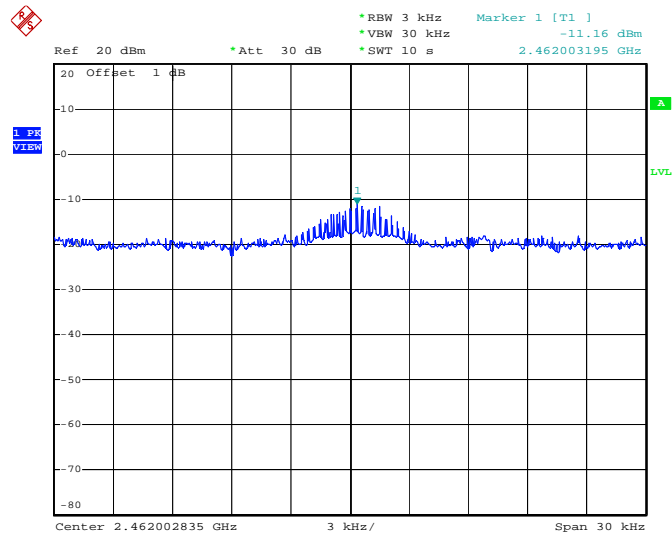

Date: 23.FEB.2009 20:41:13

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

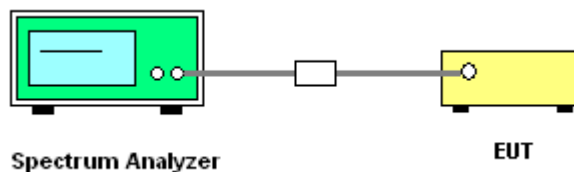

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Draft n
Test Date	Feb. 24, 2009		

Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.28	17.24	500	Complies
6	2437 MHz	15.04	17.28	500	Complies
11	2462 MHz	15.04	17.24	500	Complies

Configuration Draft n MCS8 40MHz Ant. A + Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.12	35.36	500	Complies
6	2437 MHz	35.12	35.28	500	Complies
9	2452 MHz	34.88	35.28	500	Complies

Temperature	24°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	802.11b/g
Test Date	Feb. 24, 2009		


Configuration IEEE 802.11b Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	7.56	10.16	500	Complies
6	2437 MHz	8.04	10.16	500	Complies
11	2462 MHz	8.04	10.08	500	Complies

Configuration IEEE 802.11g Ant. A


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.12	16.32	500	Complies
6	2437 MHz	15.04	16.36	500	Complies
11	2462 MHz	10.04	16.28	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2412 MHz

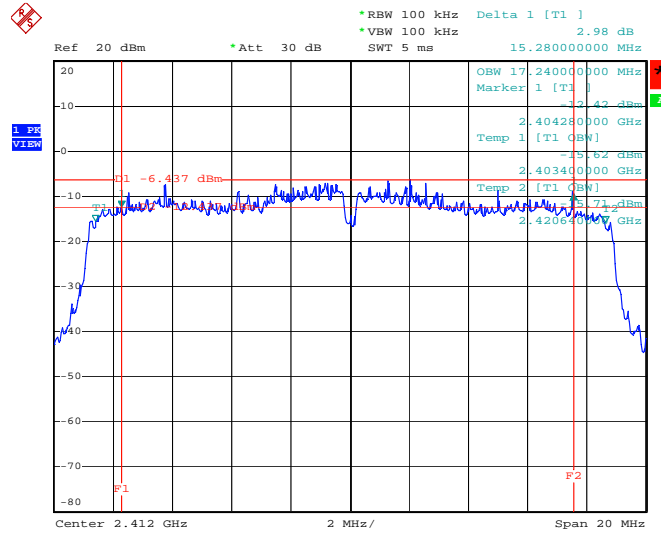


Date: 21.FEB.2009 09:36:00

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2437 MHz

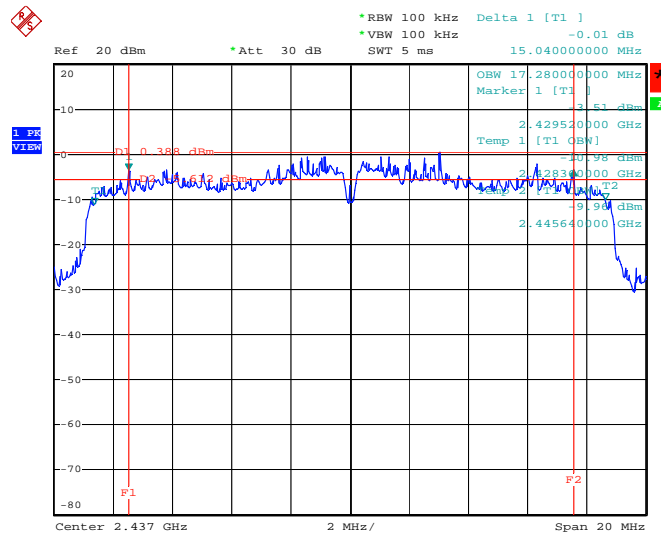


Date: 21.FEB.2009 09:39:25

6 dB Bandwidth Plot on Configuration Draft n MCS8 20MHz Ant. A + Ant. B / 2462 MHz

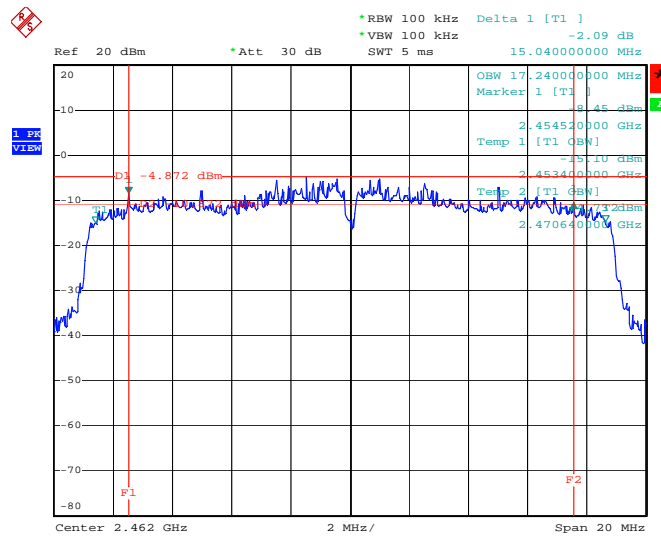


Date: 21.FEB.2009 09:42:23

6 dB Bandwidth Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 2422 MHz

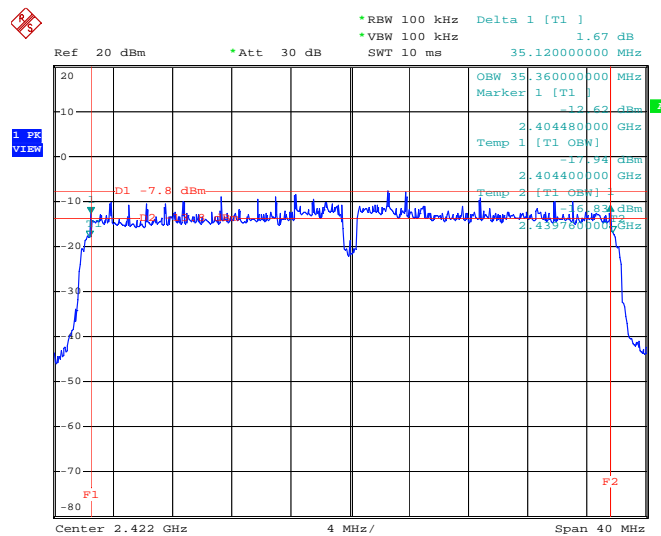


Date: 24.FEB.2009 10:28:15

6 dB Bandwidth Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2437 MHz

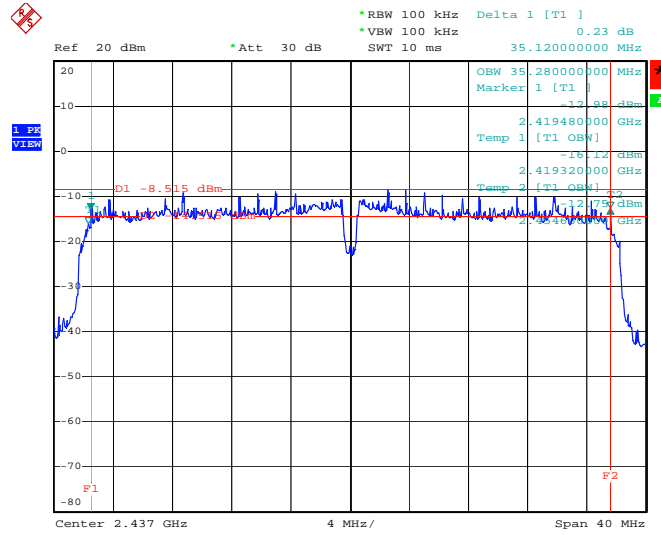


Date: 21.FEB.2009 09:48:05

6 dB Bandwidth Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 2452 MHz

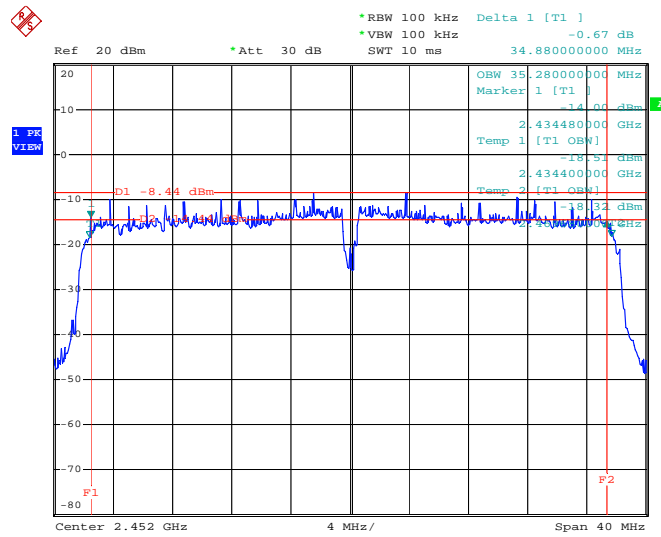


Date: 24.FEB.2009 10:33:41

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

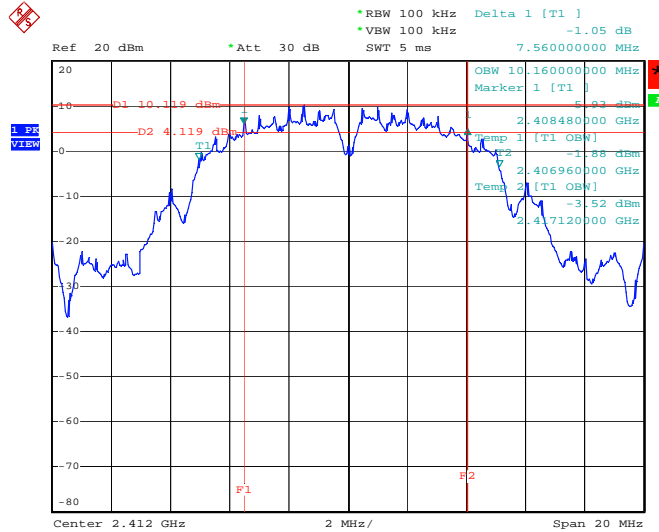


Date: 23.FEB.2009 20:42:04

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

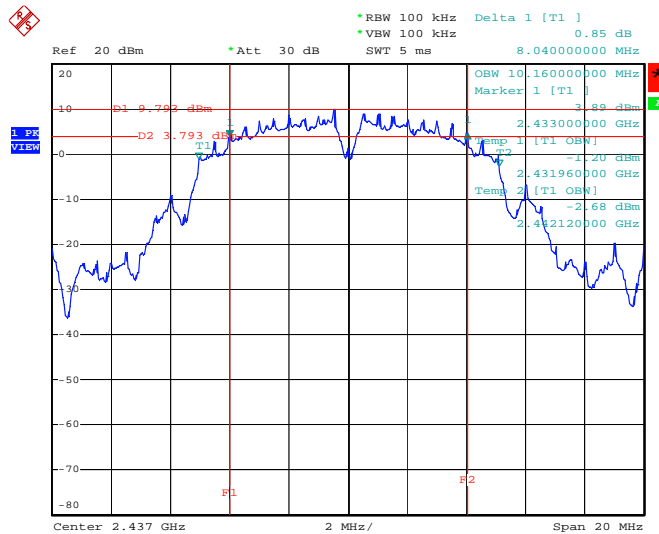


Date: 23.FEB.2009 20:44:19

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

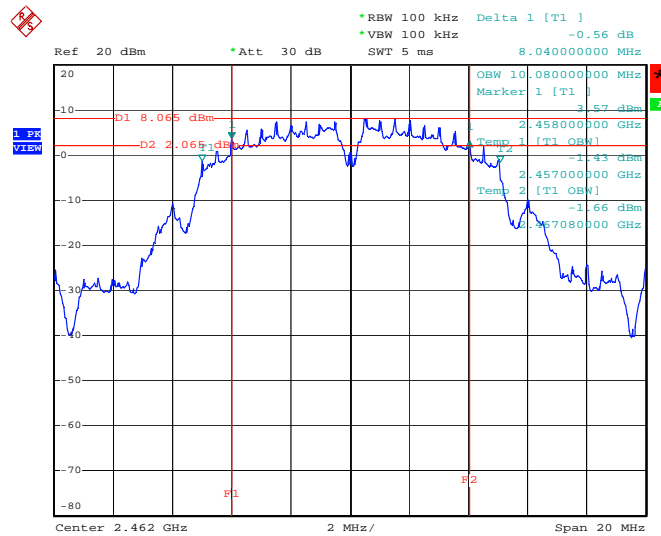


Date: 23.FEB.2009 20:46:22

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

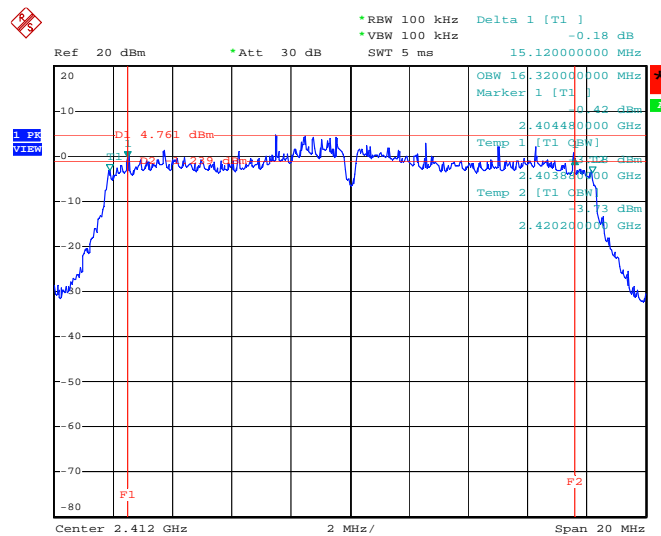


Date: 23.FEB.2009 20:34:17

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

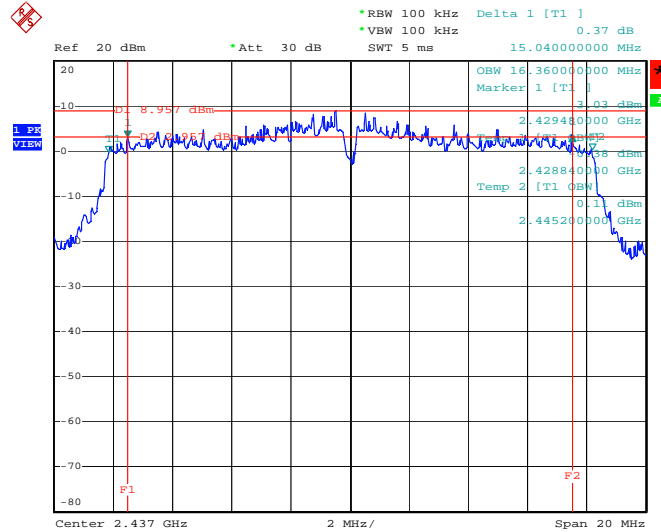

Date: 23.FEB.2009 20:36:29

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

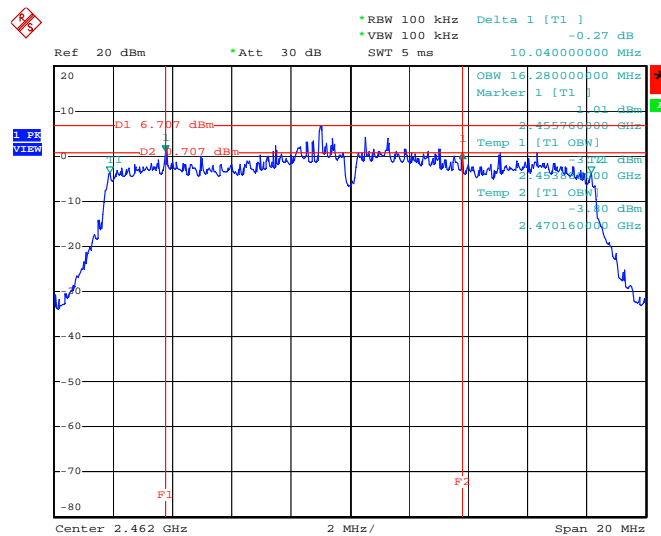

Date: 23.FEB.2009 20:39:46

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

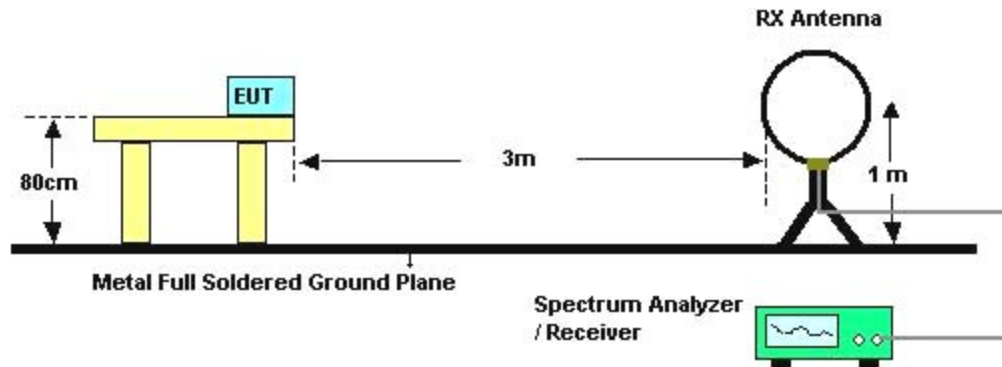

For radiated emissions above 30MHz

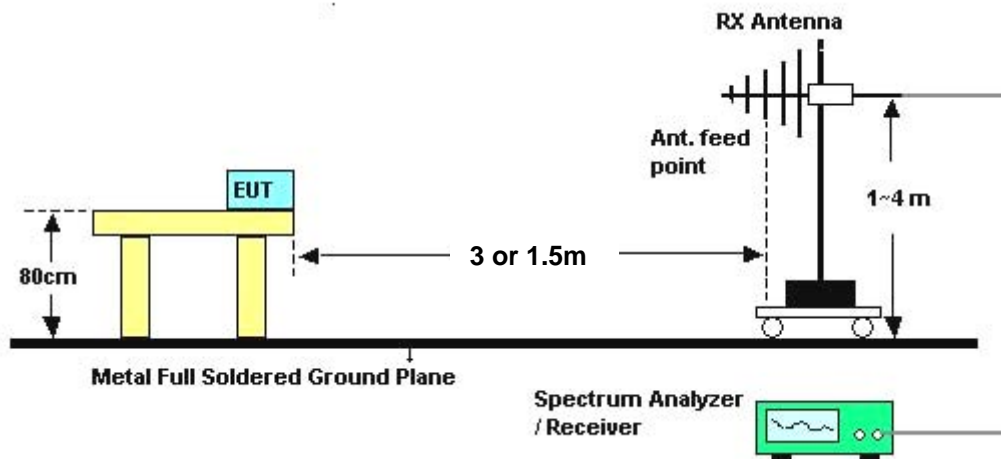

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	57%
Test Engineer	Allen Liu	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	57%
Test Engineer	Allen Liu	Configurations	Normal Link

Horizontal

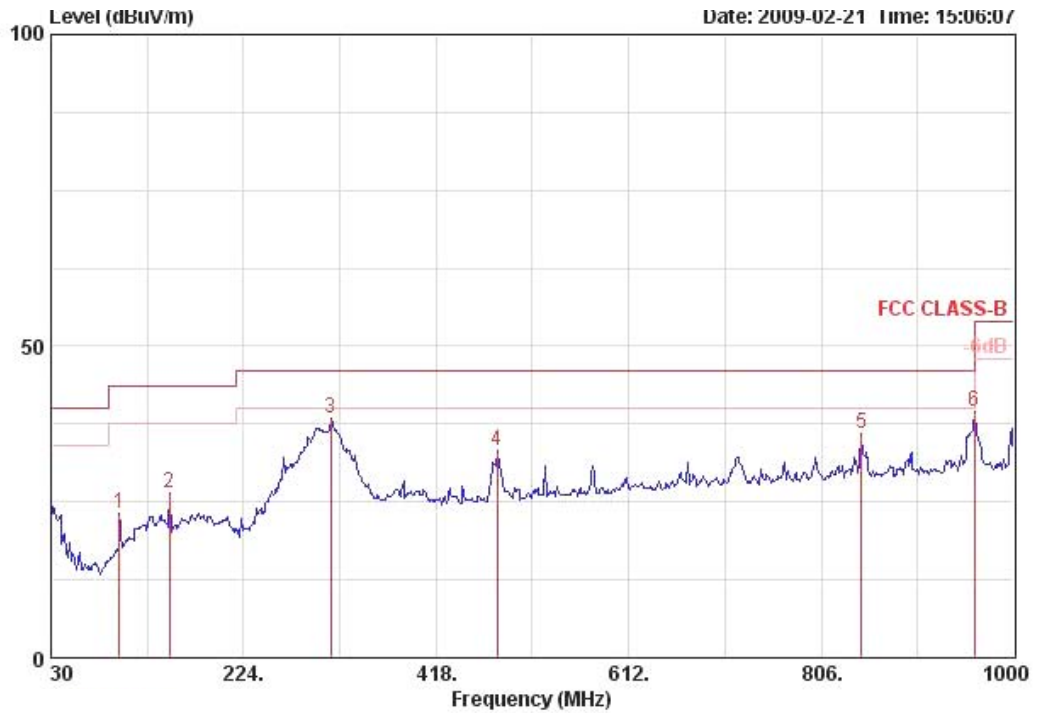

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	98.870	23.08	-20.42	43.50	38.72	10.79	1.18	27.61	Peak	100	0	HORIZONTAL
2	149.310	26.32	-17.18	43.50	40.33	11.90	1.45	27.36	Peak	100	0	HORIZONTAL
3	312.270	38.50	-7.50	46.00	49.66	13.70	2.13	26.98	Peak	100	236	HORIZONTAL
4	479.110	33.20	-12.80	46.00	41.24	17.30	2.66	27.99	Peak	100	0	HORIZONTAL
5	846.740	35.97	-10.03	46.00	39.96	20.12	3.39	27.51	Peak	100	0	HORIZONTAL
6	960.230	39.54	-14.46	54.00	42.09	20.99	3.62	27.16	Peak	100	0	HORIZONTAL

Vertical

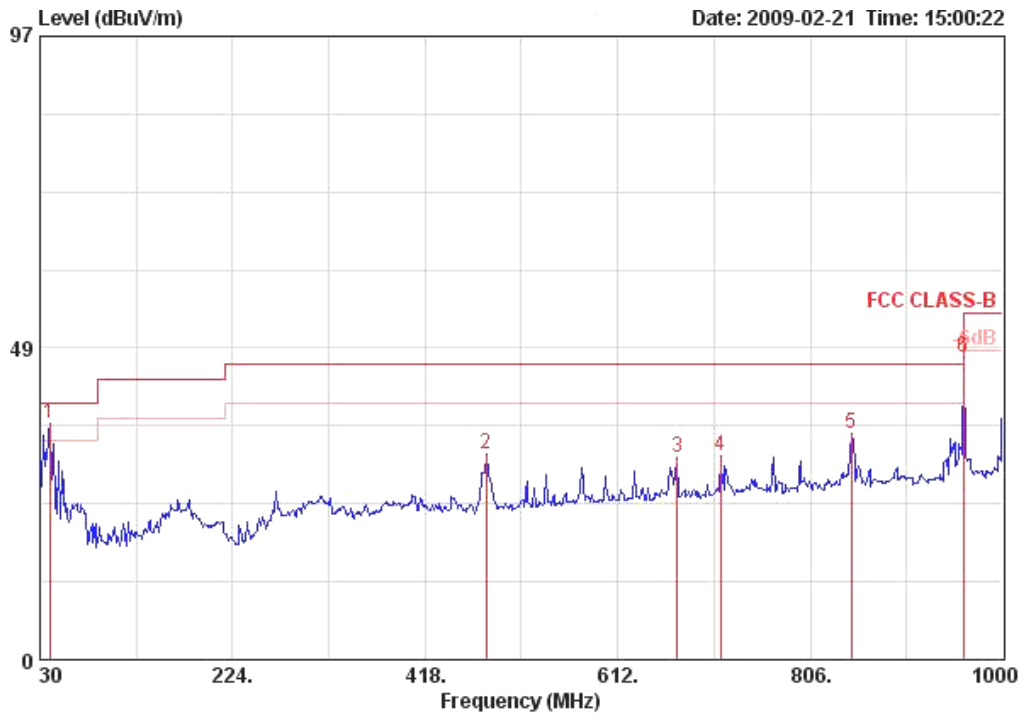

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	39.700	36.63	-3.37	40.00	50.62	13.11	0.70	27.80	Peak	100	167	VERTICAL
2	479.110	32.11	-13.89	46.00	40.14	17.30	2.66	27.99	Peak	400	0	VERTICAL
3	672.140	31.46	-14.54	46.00	37.07	19.00	3.41	28.03	Peak	400	0	VERTICAL
4	715.790	31.63	-14.37	46.00	37.01	19.20	3.36	27.93	Peak	400	0	VERTICAL
5	847.710	35.20	-10.80	46.00	39.18	20.13	3.40	27.51	Peak	400	0	VERTICAL
6	960.230	47.01	-6.99	54.00	49.56	20.99	3.62	27.16	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	24°C	Humidity	57%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 20MHz Ch 1 Ant. A + Ant. B

Horizontal

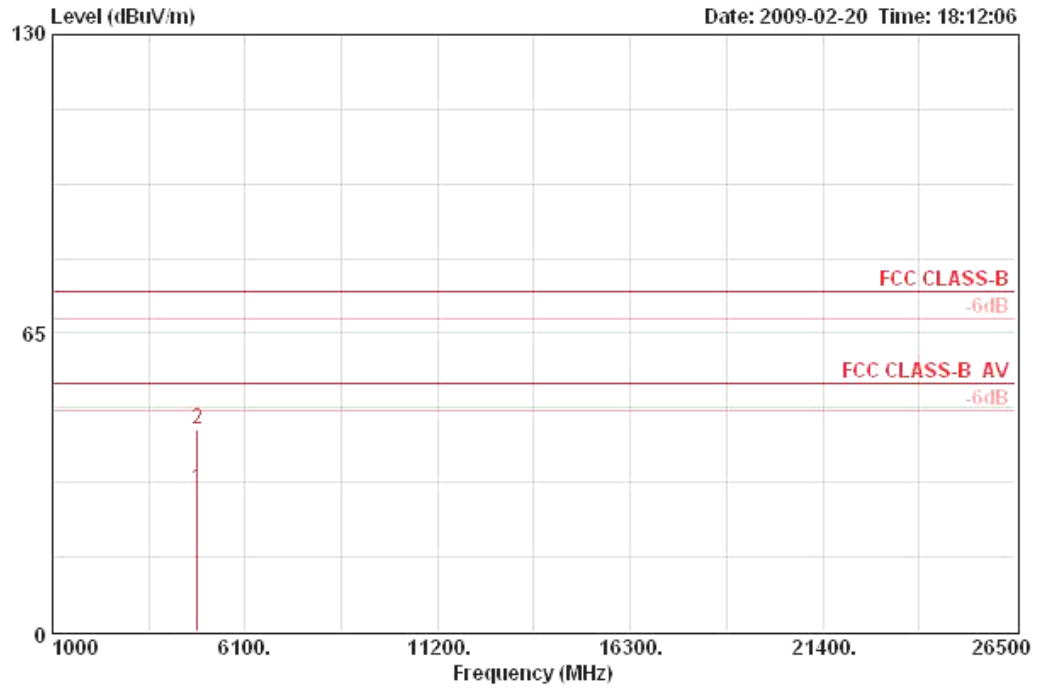

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	4824.796	31.03	-22.97	54.00	29.05	33.06	35.04	3.96 AVERAGE	HORIZONTAL	197	100
2	4824.940	43.93	-30.07	74.00	41.95	33.06	35.04	3.96 PEAK	HORIZONTAL	197	100


Vertical

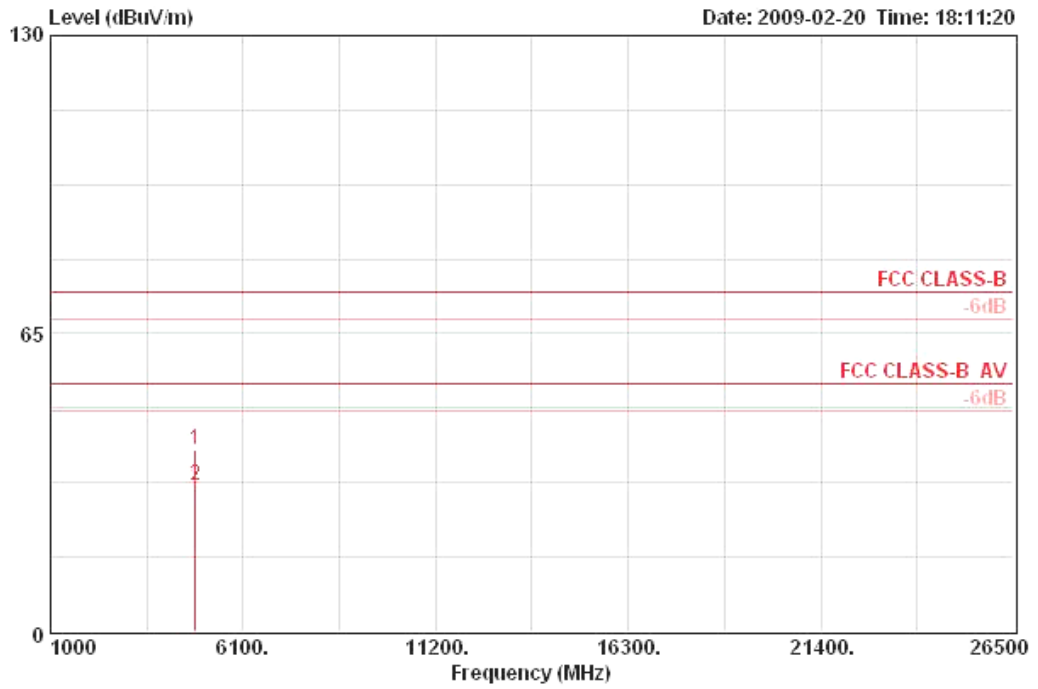

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4823.116	39.72	-34.28	74.00	37.74	33.06	35.04	3.96	PEAK	VERTICAL	106	100
2	4824.980	31.92	-22.08	54.00	29.94	33.06	35.04	3.96	AVERAGE	VERTICAL	106	100


Temperature	24°C	Humidity	57%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 20MHz Ch 6 Ant. A + Ant. B

Horizontal

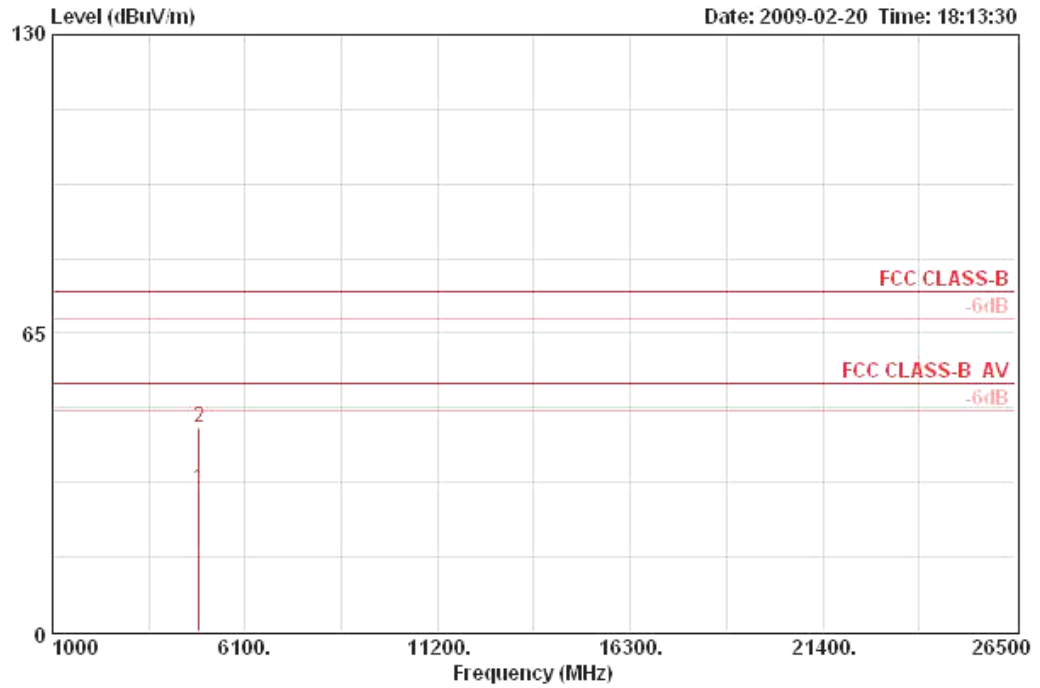

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	4873.104	31.13	-22.87	54.00	29.03	33.16	35.03	3.97 AVERAGE	HORIZONTAL	193	100
2	4873.252	44.45	-29.55	74.00	42.35	33.16	35.03	3.97 PEAK	HORIZONTAL	193	100


Vertical

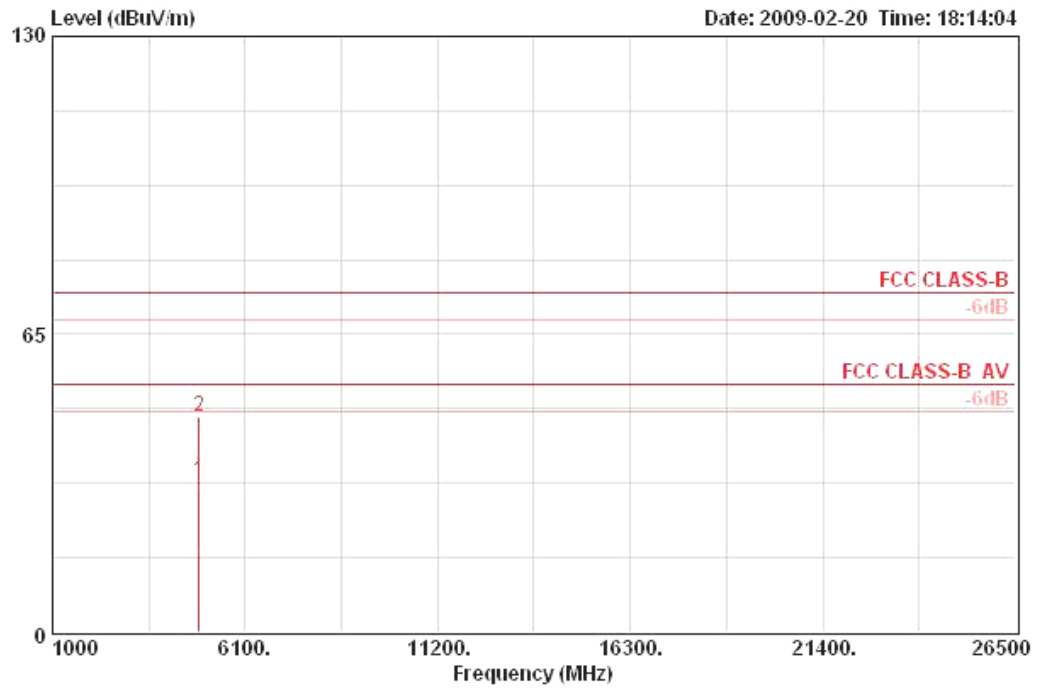

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	4873.060	32.93	-21.07	54.00	30.83	33.16	35.03	3.97 AVERAGE	VERTICAL	137	100
2	4873.316	46.87	-27.13	74.00	44.77	33.16	35.03	3.97 PEAK	VERTICAL	137	100

Temperature	24°C	Humidity	57%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 20MHz Ch11 Ant. A + Ant. B

Horizontal

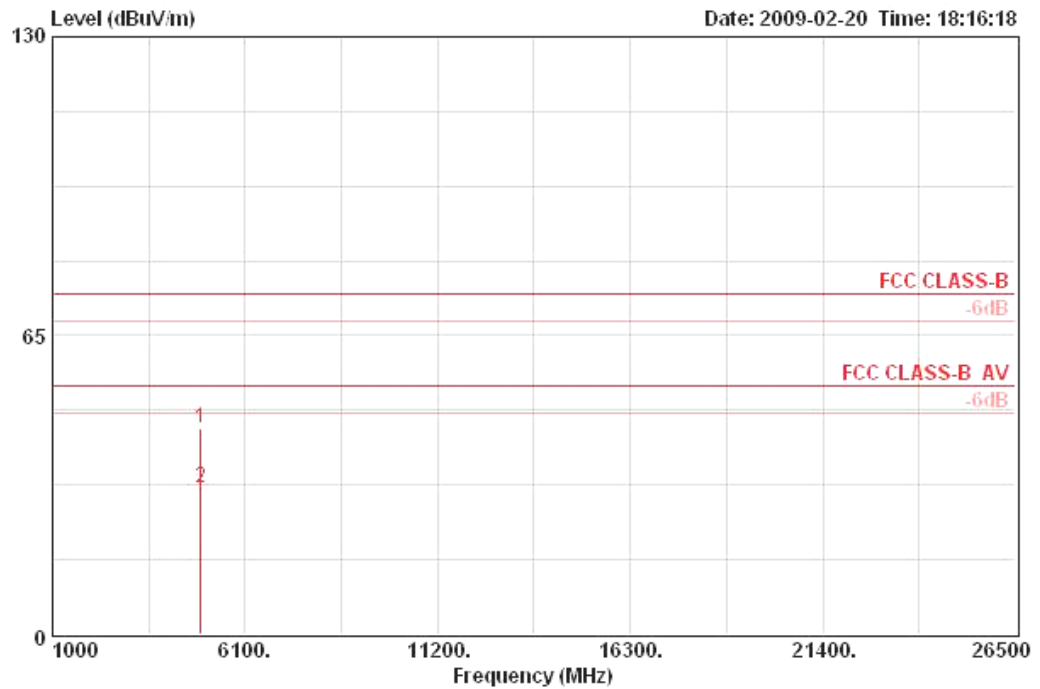

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4924.178	44.96	-29.04	74.00	42.74	33.26	35.02	3.97	PEAK	HORIZONTAL	288	100
2	4924.234	31.69	-22.31	54.00	29.47	33.26	35.02	3.97	AVERAGE	HORIZONTAL	288	100