




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	4F, No.9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.
FCC ID	RAXWN8522D3JU

Product Name	802.11n wireless LAN module
Brand Name	Sharp
Model Name	RUNTKA810WJQZ
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Sep. 29, 2010
Final Test Date	Apr. 19, 2011
Submission Type	Class II Change
Operating Mode	Client (without radar detection function)

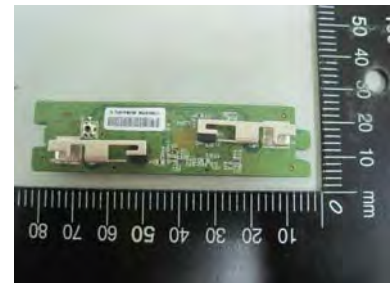

Statement

Test result included is for the 802.11n and 802.11a (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.
The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	7
3.7. Table for Class II Change	8
3.8. Table for Supporting Units	8
3.9. Test Configurations.....	9
4. TEST RESULT	10
4.1. Maximum Conducted Output Power Measurement.....	10
4.2. Radiated Emissions Measurement.....	16
4.3. Band Edge Emissions Measurement.....	44
4.4. Antenna Requirements	54
5. LIST OF MEASURING EQUIPMENTS	55
6. TEST LOCATION	58
7. TAF CERTIFICATE OF ACCREDITATION	59
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A3
APPENDIX B. TEST PHOTOS	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~C3



History of This Test Report

Original Issue Date: Apr. 26, 2011

Report No.: FR0N0535-02AA

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11n wireless LAN module
Brand Name : Sharp
Model Name : RUNTKA810WJQZ
Applicant : Arcadyan Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 29, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2011.5.3

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.31 dB
4.6	15.407(b)	Radiated Emissions	Complies	15.70 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.62 dB
4.9	15.203	Antenna Requirements	Complies	-

Note: Radiated Emissions above 1GHz and Band Edge Emissions testing are based on original conducted output power.

The original application is reported under Sporton International Inc, project number is FR0N0535AA.

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	19 for 20MHz bandwidth ; 9 for 40MHz bandwidth
Conducted Output Power	Band 1: MCS0 (20MHz): 16.08 dBm ; MCS0 (40MHz): 16.69 dBm Band 2: MCS0 (20MHz): 19.56 dBm ; MCS0 (40MHz): 19.24 dBm Band 3: MCS0 (20MHz): 20.24 dBm ; MCS0 (40MHz): 20.13 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	11a: 19
Conducted Output Power	Band 1: 16.34 dBm ; Band 2: 17.57 dBm ; Band 3: 18.06 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11n	X	X	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)		Remark
					2.4GHz Band	5GHz Band	
1	LITE	120800004600J	PIFA Antenna	N/A	-1.04	1.24	TX/RX
2	LITE	120800004500J	PIFA Antenna	N/A	-3.90	3.57	TX/RX

Note: For IEEE 802.11n mode (2TX/RX):


Ant. 1 & Ant. 2 could both transmit/receive simultaneously.

For IEEE 802.11a mode (1TX/1RX):

Ant. 1 and Ant. 2 can be used as transmitting or receiving antenna.

The EUT supports the antenna with TX/RX diversity function.

Due to the "Ant. 1" generated higher output power than "Ant. 2", all the tests were base on this setting and recorded in this report.

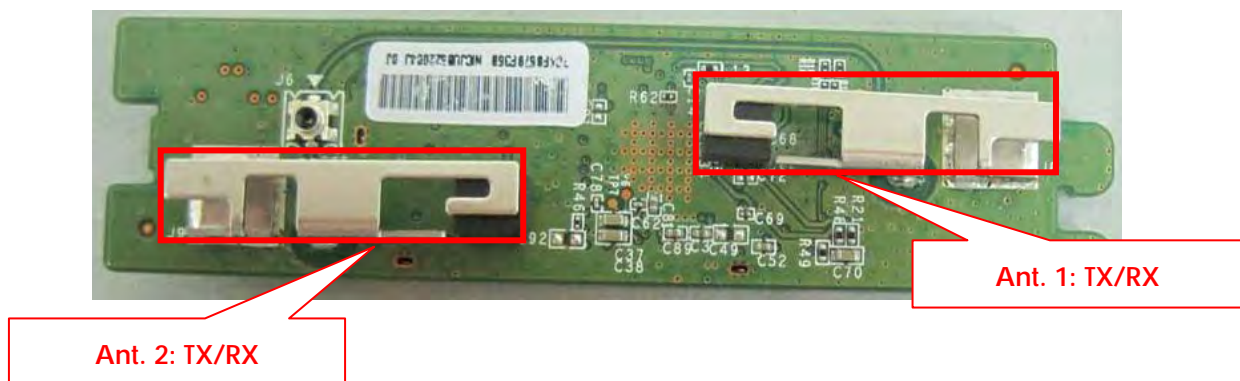

3.4. Table for Carrier Frequencies

Frequency Allocation for 802.11a

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

For both 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 118, 126, 134.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510MHz	124	5620 MHz
	104	5520 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
	118	5590 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
Max. Conducted Output Power	MCS0/20MHz	Band 1~2	6.5Mbps	36/40/48/52/60/64	1/2/1+2
		Band 3	6.5Mbps	100/116/140	1/2/1+2
	MCS0/40MHz	Band 1~2	13.5Mbps	38/46/54/62	1/2/1+2
		Band 3	13.5Mbps	102/110/134	1/2/1+2
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	1
Radiated Emission Above 1GHz	MCS0/20MHz	Band 1~2	6.5Mbps	36/40/48/52/60/64	1+2
		Band 3	6.5Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	13.5Mbps	38/46/54/62	1+2
		Band 3	13.5Mbps	102/110/134	1+2
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	1
Band Edge Emission	MCS0/20MHz	Band 1~2	6.5Mbps	36/40/48/52/60/64	1+2
		Band 3	6.5Mbps	100/116/140	1+2
	MCS0/40MHz	Band 1~2	13.5Mbps	38/46/54/62	1+2
		Band 3	13.5Mbps	102/110/134	1+2
	11a/BPSK	Band 1~2	6Mbps	36/40/48/52/60/64	1
		Band 3	6Mbps	100/116/140	1

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	187376	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton International Inc, project number is FR0N0535AA.

Below is the table for the change of the product with respect to the original one.


Modifications	Description	Performance Checking
Change switch	Change TDK switch to SiGe switch	Radiated Emissions above 1GHz Band Edge Emissions

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	E2KWM3945ABG
Mouse	FIRST PRICE	FP-M02	DoC
Wireless AP	Planex	GW-AP54SGX	N/A

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration

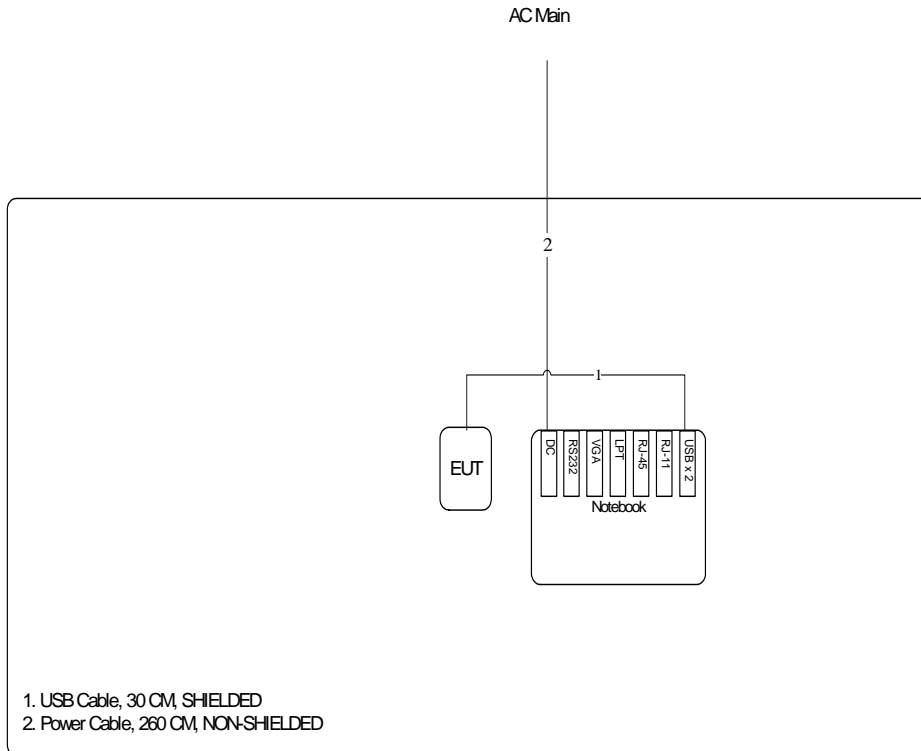

4. TEST RESULT

4.1. Maximum Conducted Output Power Measurement

4.1.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or $17 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the peak power meter

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak

4.1.3. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging
Note: When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.	

4.1.4. Test Setup Layout

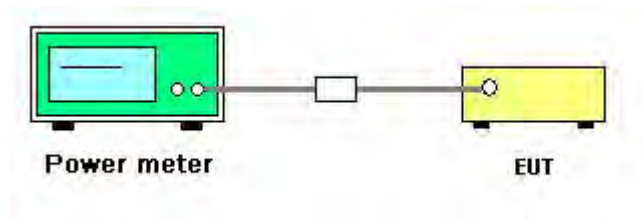

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n
Test Date	Apr. 19, 2011		

Configuration IEEE 802.11n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	14.30	17.00	Complies
40	5200 MHz	14.29	17.00	Complies
48	5240 MHz	14.22	17.00	Complies
52	5260 MHz	17.32	24.00	Complies
60	5300 MHz	17.16	24.00	Complies
64	5320 MHz	17.30	24.00	Complies
100	5500 MHz	17.69	24.00	Complies
116	5580 MHz	17.75	24.00	Complies
140	5700 MHz	16.97	24.00	Complies

Configuration IEEE 802.11n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.12	17.00	Complies
40	5200 MHz	11.01	17.00	Complies
48	5240 MHz	11.50	17.00	Complies
52	5260 MHz	15.61	24.00	Complies
60	5300 MHz	15.60	24.00	Complies
64	5320 MHz	15.41	24.00	Complies
100	5500 MHz	16.43	24.00	Complies
116	5580 MHz	16.63	24.00	Complies
140	5700 MHz	16.50	24.00	Complies

Configuration IEEE 802.11n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.01	17.00	Complies
40	5200 MHz	15.96	17.00	Complies
48	5240 MHz	16.08	17.00	Complies
52	5260 MHz	19.56	24.00	Complies
60	5300 MHz	19.46	24.00	Complies
64	5320 MHz	19.47	24.00	Complies
100	5500 MHz	20.12	24.00	Complies
116	5580 MHz	20.24	24.00	Complies
140	5700 MHz	19.75	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	14.15	17.00	Complies
46	5230 MHz	14.74	17.00	Complies
54	5270 MHz	16.92	24.00	Complies
62	5310 MHz	12.82	24.00	Complies
102	5510MHz	14.62	24.00	Complies
110	5550 MHz	17.40	24.00	Complies
134	5670 MHz	16.81	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.59	17.00	Complies
46	5230 MHz	12.28	17.00	Complies
54	5270 MHz	15.42	24.00	Complies
62	5310 MHz	10.22	24.00	Complies
102	5510MHz	12.97	24.00	Complies
110	5550 MHz	16.83	24.00	Complies
134	5670 MHz	16.71	24.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	16.07	17.00	Complies
46	5230 MHz	16.69	17.00	Complies
54	5270 MHz	19.24	24.00	Complies
62	5310 MHz	14.72	24.00	Complies
102	5510MHz	15.64	24.00	Complies
110	5550 MHz	20.13	24.00	Complies
134	5670 MHz	19.77	24.00	Complies



Temperature	26°C	Humidity	60%
Test Engineer	Johnson Chang	Configurations	IEEE 802.11a
Test Date	Nov. 05, 2010		

Configuration IEEE 802.11a Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.27	17.00	Complies
40	5200 MHz	16.16	17.00	Complies
48	5240 MHz	16.34	17.00	Complies
52	5260 MHz	17.53	24.00	Complies
60	5300 MHz	17.57	24.00	Complies
64	5320 MHz	17.50	24.00	Complies
100	5500 MHz	17.89	24.00	Complies
116	5580 MHz	18.06	24.00	Complies
140	5700 MHz	17.32	24.00	Complies

4.2. Radiated Emissions Measurement

4.2.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.10 The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.2.4. Test Setup Layout

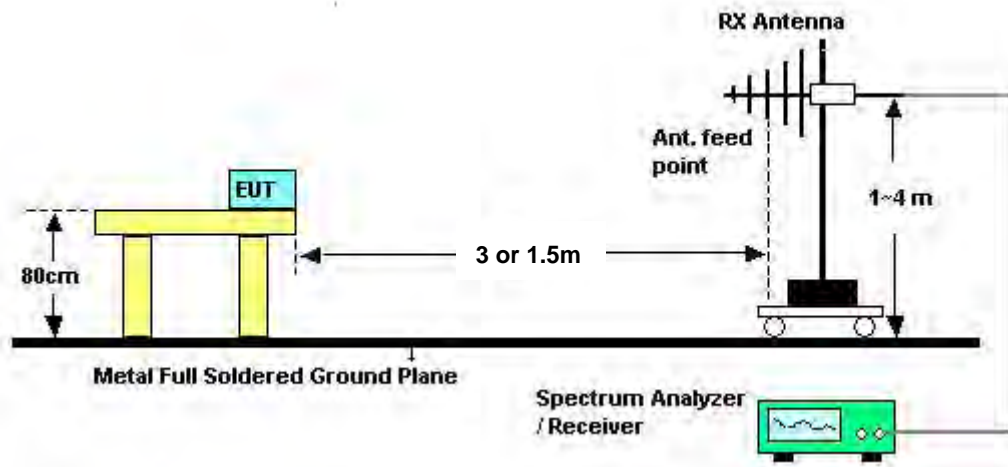

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36 / (Ant. 1 + Ant. 2)
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15539.76	53.07	80.00	-26.93	44.60	6.13	37.65	35.31	204	100	Peak	HORIZONTAL
2	15540.07	39.92	60.00	-20.08	31.45	6.13	37.65	35.31	204	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15539.68	39.44	60.00	-20.56	30.93	6.13	37.69	35.31	171	100	Average	VERTICAL
2	15540.44	52.31	80.00	-27.69	43.80	6.13	37.69	35.31	171	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 40 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15599.94	39.13	60.00	-20.87	30.74	6.13	37.60	35.34	175	100	Average	HORIZONTAL
2	15600.42	50.88	80.00	-29.12	42.49	6.13	37.60	35.34	175	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15599.91	51.69	80.00	-28.31	43.30	6.13	37.60	35.34	110	100	Peak	VERTICAL
2	15600.00	41.00	60.00	-19.00	32.61	6.13	37.60	35.34	110	100	Average	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 48 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.51	49.96	80.00	-30.04	41.73	6.14	37.48	35.39	187	100	Peak	HORIZONTAL
2	15719.65	37.79	60.00	-22.21	29.56	6.14	37.48	35.39	187	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.91	37.90	60.00	-22.10	29.67	6.14	37.48	35.39	133	100	Average	VERTICAL
2	15720.21	50.00	80.00	-30.00	41.77	6.14	37.48	35.39	133	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 52 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15779.51	40.24	60.00	-19.76	32.11	6.14	37.41	35.42	225	100	Average	HORIZONTAL
2	15779.52	53.23	80.00	-26.77	45.10	6.14	37.41	35.42	225	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15779.70	50.02	80.00	-29.98	41.89	6.14	37.41	35.42	139	100	Peak	VERTICAL
2	15779.86	37.30	60.00	-22.70	29.17	6.14	37.41	35.42	139	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 60 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10602.01	41.46	60.00	-18.54	33.49	5.01	38.38	35.42	147	100	Average	HORIZONTAL
2	10602.01	52.99	80.00	-27.01	45.02	5.01	38.38	35.42	147	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10602.02	37.78	60.00	-22.22	29.81	5.01	38.38	35.42	176	100	Average	VERTICAL
2	10602.02	48.53	80.00	-31.47	40.56	5.01	38.38	35.42	176	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 64 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10639.80	56.35	80.00	-23.65	48.36	5.01	38.37	35.39	359	100	Peak	HORIZONTAL
2	10640.41	43.47	60.00	-16.53	35.48	5.01	38.37	35.39	359	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10640.41	52.26	80.00	-27.74	44.27	5.01	38.37	35.39	152	100	Peak	VERTICAL
2	10640.47	40.18	60.00	-19.82	32.19	5.01	38.37	35.39	152	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 100 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11000.43	50.80	80.00	-29.20	42.57	5.01	38.32	35.10	210	100	Peak	HORIZONTAL
2	11000.49	37.95	60.00	-22.05	29.72	5.01	38.32	35.10	210	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11000.20	50.83	80.00	-29.17	42.62	5.01	38.30	35.10	177	100	Peak	VERTICAL
2	11000.49	39.85	60.00	-20.15	31.64	5.01	38.30	35.10	177	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 116 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11159.77	49.32	80.00	-30.68	40.98	5.04	38.47	35.17	184	100	Peak	HORIZONTAL
2	11160.39	37.33	60.00	-22.67	28.99	5.04	38.47	35.17	184	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11160.34	51.00	80.00	-29.00	42.66	5.04	38.47	35.17	213	100	Peak	VERTICAL
2	11160.47	40.23	60.00	-19.77	31.89	5.04	38.47	35.17	213	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 140 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11399.50	37.19	60.00	-22.81	28.64	5.10	38.70	35.25	134	100	Average	HORIZONTAL
2	11400.41	48.06	80.00	-31.94	39.51	5.10	38.70	35.25	134	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11399.67	39.63	60.00	-20.37	31.08	5.10	38.70	35.25	175	100	Average	VERTICAL
2	11399.91	51.79	80.00	-28.21	43.24	5.10	38.70	35.25	175	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15569.51	39.01	60.00	-20.99	30.58	6.13	37.63	35.33	127	100	Average	HORIZONTAL
2	15570.18	51.41	80.00	-28.59	42.98	6.13	37.63	35.33	127	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15570.26	51.46	80.00	-28.54	43.01	6.13	37.65	35.33	211	100	Peak	VERTICAL
2	15570.44	40.01	60.00	-19.99	31.56	6.13	37.65	35.33	211	100	Average	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 46 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15689.77	38.30	60.00	-21.70	30.02	6.14	37.51	35.37	147	100	Average	HORIZONTAL
2	15690.19	50.53	80.00	-29.47	42.25	6.14	37.51	35.37	147	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15689.50	38.03	60.00	-21.97	29.75	6.14	37.51	35.37	216	100	Average	VERTICAL
2	15689.59	50.62	80.00	-29.38	42.34	6.14	37.51	35.37	216	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 54 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15809.51	50.53	80.00	-29.47	42.43	6.14	37.39	35.43	165	100	Peak	HORIZONTAL
2	15809.91	38.10	60.00	-21.90	30.00	6.14	37.39	35.43	165	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15810.03	51.08	80.00	-28.92	42.98	6.14	37.39	35.43	219	100	Peak	VERTICAL
2	15810.28	38.09	60.00	-21.91	29.99	6.14	37.39	35.43	219	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 62 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10619.70	48.37	80.00	-31.63	40.40	5.01	38.38	35.42	226	100	Peak	HORIZONTAL
2	10620.01	38.30	60.00	-21.70	30.33	5.01	38.38	35.42	226	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10619.56	50.84	80.00	-29.16	42.87	5.01	38.38	35.42	175	100	Peak	VERTICAL
2	10620.33	38.57	60.00	-21.43	30.60	5.01	38.38	35.42	175	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 102 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11020.11	38.36	60.00	-21.64	30.12	5.02	38.33	35.11	189	100	Average	HORIZONTAL
2	11020.33	49.94	80.00	-30.06	41.70	5.02	38.33	35.11	189	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11019.52	38.73	60.00	-21.27	30.50	5.02	38.32	35.11	148	100	Average	VERTICAL
2	11019.87	50.53	80.00	-29.47	42.30	5.02	38.32	35.11	148	100	Peak	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 110 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11099.57	38.63	60.00	-21.37	30.34	5.03	38.40	35.14	324	100	Average	HORIZONTAL
2	11100.23	52.24	80.00	-27.76	43.95	5.03	38.40	35.14	324	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11099.77	38.76	60.00	-21.24	30.47	5.03	38.40	35.14	131	100	Average	VERTICAL
2	11100.45	53.66	80.00	-26.34	45.37	5.03	38.40	35.14	131	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 134 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11339.67	39.48	60.00	-20.52	31.01	5.08	38.63	35.24	233	100	Average	HORIZONTAL
2	11340.03	47.96	80.00	-32.04	39.49	5.08	38.63	35.24	233	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11339.85	49.29	80.00	-30.71	40.82	5.08	38.63	35.24	194	100	Peak	VERTICAL
2	11339.90	36.64	60.00	-23.36	28.17	5.08	38.63	35.24	194	100	Average	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15540.07	40.27	60.00	-19.73	31.80	6.13	37.65	35.31	217	100	Average	HORIZONTAL
2	15540.53	54.44	80.00	-25.56	45.97	6.13	37.65	35.31	217	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15540.41	43.99	60.00	-16.01	35.48	6.13	37.69	35.31	264	131	Average	VERTICAL
2	15541.17	58.75	80.00	-21.25	50.24	6.13	37.69	35.31	264	131	Peak	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 40 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15599.56	52.51	80.00	-27.49	44.12	6.13	37.60	35.34	203	100	Peak	HORIZONTAL
2	15601.56	40.91	60.00	-19.09	32.52	6.13	37.60	35.34	203	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15599.67	44.30	60.00	-15.70	35.91	6.13	37.60	35.34	271	129	Average	VERTICAL
2	15599.77	57.56	80.00	-22.44	49.17	6.13	37.60	35.34	271	129	Peak	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 48 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.69	51.60	80.00	-28.40	43.37	6.14	37.48	35.39	127	106	Peak	HORIZONTAL
2	15719.87	39.25	60.00	-20.75	31.02	6.14	37.48	35.39	127	106	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.52	54.55	80.00	-25.45	46.32	6.14	37.48	35.39	267	127	Peak	VERTICAL
2	15719.94	41.92	60.00	-18.08	33.69	6.14	37.48	35.39	267	127	Average	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 52 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15779.83	48.88	80.00	-31.12	40.75	6.14	37.41	35.42	250	100	Peak	HORIZONTAL
2	15780.08	37.42	60.00	-22.58	29.29	6.14	37.41	35.42	250	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15780.28	49.87	80.00	-30.13	41.74	6.14	37.41	35.42	195	100	Peak	VERTICAL
2	15780.88	38.29	60.00	-21.71	30.16	6.14	37.41	35.42	195	100	Average	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 60 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10600.09	43.04	60.00	-16.96	35.07	5.01	38.38	35.42	338	123	Average	HORIZONTAL
2	10600.90	57.67	80.00	-22.33	49.70	5.01	38.38	35.42	338	123	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10600.25	40.56	60.00	-19.44	32.59	5.01	38.38	35.42	126	118	Average	VERTICAL
2	10600.26	54.69	80.00	-25.31	46.72	5.01	38.38	35.42	126	118	Peak	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 64 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10639.07	42.14	60.00	-17.86	34.15	5.01	38.37	35.39	337	124	Average	HORIZONTAL
2	10639.29	57.61	80.00	-22.39	49.62	5.01	38.37	35.39	337	124	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10639.54	52.24	80.00	-27.76	44.25	5.01	38.37	35.39	118	114	Peak	VERTICAL
2	10639.62	39.17	60.00	-20.83	31.18	5.01	38.37	35.39	118	114	Average	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 100 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10999.85	49.57	80.00	-30.43	41.34	5.01	38.32	35.10	298	100	Peak	HORIZONTAL
2	11000.42	36.94	60.00	-23.06	28.71	5.01	38.32	35.10	298	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10999.98	38.03	60.00	-21.97	29.82	5.01	38.30	35.10	210	100	Average	VERTICAL
2	11000.41	50.58	80.00	-29.42	42.37	5.01	38.30	35.10	210	100	Peak	VERTICAL



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 116 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11159.52	49.23	80.00	-30.77	40.89	5.04	38.47	35.17	161	100	Peak	HORIZONTAL
2	11159.75	36.68	60.00	-23.32	28.34	5.04	38.47	35.17	161	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11160.92	40.28	60.00	-19.72	31.94	5.04	38.47	35.17	210	100	Average	VERTICAL
2	11161.12	49.71	80.00	-30.29	41.37	5.04	38.47	35.17	210	100	Peak	VERTICAL

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 140 / Ant. 1
Test Date	Apr. 19, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11399.94	38.89	60.00	-21.11	30.34	5.10	38.70	35.25	219	100	Average	HORIZONTAL
2	11399.97	48.53	80.00	-31.47	39.98	5.10	38.70	35.25	219	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11399.92	39.33	60.00	-20.67	30.78	5.10	38.70	35.25	310	100	Average	VERTICAL
2	11400.42	48.70	80.00	-31.30	40.15	5.10	38.70	35.25	310	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.3. Band Edge Emissions Measurement

4.3.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz /1 MHz for Peak

4.3.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.3.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Band Edge and Fundamental Emissions

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	53.83	60.00	-6.17	16.73	3.43	33.67	0.00	281	138	Average	VERTICAL
2	5150.00	66.63	80.00	-13.37	29.53	3.43	33.67	0.00	281	138	Peak	VERTICAL
3	5177.60	100.79	94.00			3.44	33.73	0.00	281	138	Peak	VERTICAL
4	5180.20	88.67	74.00			3.44	33.73	0.00	281	138	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5149.20	62.77	80.00	-17.23	25.67	3.43	33.67	0.00	359	157	Peak	HORIZONTAL
2	5150.00	52.82	60.00	-7.18	15.72	3.43	33.67	0.00	359	157	Average	HORIZONTAL
3	5199.20	87.74	74.00			3.45	33.76	0.00	359	157	Average	HORIZONTAL
4	5201.20	100.32	94.00			3.45	33.76	0.00	359	157	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 60, 64 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5300.40	94.36	74.00			3.48	33.94	0.00	269	100 Average	VERTICAL
2	5300.80	106.40	94.00			3.48	33.94	0.00	269	100 Peak	VERTICAL
3	5350.00	53.38	60.00	-6.62	15.86	3.49	34.03	0.00	269	100 Average	VERTICAL
4	5353.20	64.77	80.00	-15.23	27.25	3.49	34.03	0.00	269	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5320.80	93.95	74.00			3.48	33.97	0.00	250	100 Average	VERTICAL
2	5320.80	106.51	94.00			3.48	33.97	0.00	250	100 Peak	VERTICAL
3	5350.00	56.01	60.00	-3.99	18.49	3.49	34.03	0.00	250	100 Average	VERTICAL
4	5350.00	68.31	80.00	-11.69	30.79	3.49	34.03	0.00	250	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 100, 140 / Ant. 1 + Ant. 2
Test Date	Apr. 11, 2011		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5459.60	73.80	80.00	-6.20	36.07	3.52	34.21	0.00	48	117 Peak	VERTICAL
2	5460.00	57.78	60.00	-2.22	20.05	3.52	34.21	0.00	48	117 Average	VERTICAL
3	5500.40	97.79	74.00			3.53	34.26	0.00	48	117 Average	VERTICAL
4	5500.60	110.16	94.00			3.53	34.26	0.00	48	117 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5700.80	97.68	74.00			3.59	34.34	0.00	190	100 Average	VERTICAL
2	5700.80	111.25	94.00			3.59	34.34	0.00	190	100 Peak	VERTICAL
3	5725.00	60.37	74.00	-13.63	22.43	3.60	34.34	0.00	190	100 Average	VERTICAL
4	5726.80	76.84	94.00	-17.16	38.90	3.60	34.34	0.00	190	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5147.60	73.50	80.00	-6.50	36.40	3.43	33.67	0.00	104	109	Peak	VERTICAL
2	5150.00	58.09	60.00	-1.91	20.99	3.43	33.67	0.00	104	109	Average	VERTICAL
3	5188.00	83.24	74.00			3.44	33.73	0.00	104	109	Average	VERTICAL
4	5188.40	97.48	94.00			3.44	33.73	0.00	104	109	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	52.93	60.00	-7.07	15.83	3.43	33.67	0.00	21	130	Average	VERTICAL
2	5150.00	62.68	80.00	-17.32	25.58	3.43	33.67	0.00	21	130	Peak	VERTICAL
3	5231.20	84.28	74.00			3.46	33.82	0.00	21	130	Average	VERTICAL
4	5231.20	99.31	94.00			3.46	33.82	0.00	21	130	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 54, 62 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5271.20	99.34	94.00			3.46	33.88	0.00	355	150 Peak	HORIZONTAL
2	5271.60	85.06	74.00			3.47	33.88	0.00	355	150 Average	HORIZONTAL
3	5350.00	53.45	60.00	-6.55	15.93	3.49	34.03	0.00	355	150 Average	HORIZONTAL
4	5350.00	62.84	80.00	-17.16	25.32	3.49	34.03	0.00	355	150 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5311.20	99.66	94.00			3.48	33.94	0.00	181	100 Peak	VERTICAL
2	5321.20	85.63	74.00			3.48	33.97	0.00	181	100 Average	VERTICAL
3	5350.80	58.19	60.00	-1.81	20.67	3.49	34.03	0.00	181	100 Average	VERTICAL
4	5350.80	70.87	80.00	-9.13	33.35	3.49	34.03	0.00	181	100 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 102, 110, 134 / Ant. 1 + Ant. 2
Test Date	Apr. 19, 2011		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5459.60	74.45	80.00	-5.55	36.72	3.52	34.21	0.00	339	100	Peak	VERTICAL
2	5460.00	59.38	60.00	-0.62	21.65	3.52	34.21	0.00	339	100	Average	VERTICAL
3	5512.40	104.38	94.00			3.54	34.28	0.00	339	100	Peak	VERTICAL
4	5512.80	94.14	74.00			3.54	34.28	0.00	339	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5510MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5460.00	55.41	60.00	-4.59	17.68	3.52	34.21	0.00	1	131	Average	VERTICAL
2	5460.00	68.25	80.00	-11.75	30.52	3.52	34.21	0.00	1	131	Peak	VERTICAL
3	5544.00	109.95	94.00			3.55	34.31	0.00	1	131	Peak	VERTICAL
4	5546.00	91.93	74.00			3.55	34.31	0.00	1	131	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5681.20	107.45	94.00			3.59	34.33	0.00	186	100	Peak	VERTICAL
2	5681.60	92.08	74.00			3.59	34.33	0.00	186	100	Average	VERTICAL
3	5725.00	58.37	74.00	-15.63	20.43	3.60	34.34	0.00	186	100	Average	VERTICAL
4	5725.00	70.96	94.00	-23.04	33.02	3.60	34.34	0.00	186	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36, 40 / Ant. 1
Test Date	Apr. 19, 2011		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5148.20	70.80	80.00	-9.20	33.70	3.43	33.67	0.00	233	148	Peak	VERTICAL
2	5150.00	55.43	60.00	-4.57	18.33	3.43	33.67	0.00	233	148	Average	VERTICAL
3	5180.60	101.38	94.00			3.44	33.73	0.00	233	148	Peak	VERTICAL
4	5180.80	89.20	74.00			3.44	33.73	0.00	233	148	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5149.60	62.68	80.00	-17.32	25.58	3.43	33.67	0.00	256	104	Peak	VERTICAL
2	5150.00	52.45	60.00	-7.55	15.35	3.43	33.67	0.00	256	104	Average	VERTICAL
3	5200.80	92.30	74.00			3.45	33.76	0.00	256	104	Average	VERTICAL
4	5201.20	104.34	94.00			3.45	33.76	0.00	256	104	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 60, 64 / Ant. 1
Test Date	Apr. 19, 2011		

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5300.80	93.29	74.00			3.48	33.94	0.00	276	100	Average	VERTICAL
2	5300.80	105.58	94.00			3.48	33.94	0.00	276	100	Peak	VERTICAL
3	5350.00	52.95	60.00	-7.05	15.43	3.49	34.03	0.00	276	100	Average	VERTICAL
4	5350.00	63.68	80.00	-16.32	26.16	3.49	34.03	0.00	276	100	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5320.80	91.85	74.00			3.48	33.97	0.00	267	106	Average	VERTICAL
2	5321.60	104.57	94.00			3.48	33.97	0.00	267	106	Peak	VERTICAL
3	5350.00	54.83	60.00	-5.17	17.31	3.49	34.03	0.00	267	106	Average	VERTICAL
4	5350.80	69.37	80.00	-10.63	31.85	3.49	34.03	0.00	267	106	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



Temperature	20°C	Humidity	65%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 100, 140 / Ant. 1
Test Date	Apr. 19, 2011		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5459.60	70.90	80.00	-9.10	33.17	3.52	34.21	0.00	262	137	Peak	VERTICAL
2	5460.00	54.01	60.00	-5.99	16.28	3.52	34.21	0.00	262	137	Average	VERTICAL
3	5500.80	96.75	74.00			3.54	34.26	0.00	262	137	Average	VERTICAL
4	5501.00	109.16	94.00			3.54	34.26	0.00	262	137	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5699.00	94.96	74.00			3.59	34.34	0.00	197	127	Average	VERTICAL
2	5700.20	107.89	94.00			3.59	34.34	0.00	197	127	Peak	VERTICAL
3	5725.00	55.43	74.00	-18.57	17.49	3.60	34.34	0.00	197	127	Average	VERTICAL
4	5729.00	69.69	94.00	-24.31	31.75	3.60	34.34	0.00	197	127	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.4. Antenna Requirements

4.4.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.4.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2010	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 13, 2009	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 22, 2010	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 08, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2009	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 06, 2010	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2009	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 06, 2009	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 22, 2010	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 22, 2011	Radiation (03CH01-CB)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2009*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	-	30 MHz - 1 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	-	30 MHz - 1 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	-	1 GHz - 40 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	-	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	-	1 GHz - 40 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	-	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP30	100023	9KHz~30GHz	Mar. 05, 2010	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	TEN BILLION	TTH-D3SP	TBN-931011	-30~100°C	May. 21, 2010	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 25, 2009	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 19, 2010	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Mar. 09, 2010	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Mar. 09, 2011	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Apr. 16, 2010	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Apr. 16, 2011	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Oct. 14, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 13, 2010	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 08, 2010	Conducted (TH01-CB)



Note: Calibration Interval of instruments listed above is one year.

Note: For "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix