



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
FCC ID	RAXWN8722BTAAC
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan

Product Name	WN8722BTAAC-VO
Brand Name	Arcadyan
Model No.	SBOM-06005-000
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz / 5725 ~ 5850 MHz
Received Date	May 19, 2015
Final Test Date	Jul. 12, 2015
Submission Type	Original Equipment

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units .....	11
3.8. Table for Parameters of Test Software Setting .....	12
3.9. EUT Operation during Test .....	12
3.10. Duty Cycle.....	12
3.11. Test Configurations .....	13
<b>4. TEST RESULT</b> .....	<b>16</b>
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	20
4.3. 6dB Spectrum Bandwidth Measurement .....	42
4.4. Maximum Conducted Output Power Measurement.....	47
4.5. Power Spectral Density Measurement .....	52
4.6. Radiated Emissions Measurement .....	67
4.7. Band Edge Emissions Measurement .....	111
4.8. Frequency Stability Measurement .....	127
4.9. Antenna Requirements .....	131
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>132</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>133</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b> .....	<b>A1 ~ A9</b>
<b>APPENDIX B. TEST PHOTOS</b> .....	<b>B1 ~ B9</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>C1 ~ C4</b>
<b>APPENDIX D. RADIATED EMISSION CO-LOCATION REPORT</b> .....	<b>D1 ~ D5</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR551972AD	Rev. 01	Initial issue of report	Jun. 18, 2015



## 1. VERIFICATION OF COMPLIANCE

Product Name : WN8722BTAAC-VO  
Brand Name : Arcadyan  
Model No. : SBOM-06005-000  
Applicant : Arcadyan Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 19, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Sam Chen", is written over a horizontal line. The signature is fluid and cursive.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.81 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	1.29 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.12 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.25 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.02 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM )
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz / 5725 ~ 5850 MHz
Channel Number	24 for 20MHz bandwidth ; 11 for 40MHz bandwidth 5 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 17.89 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 22.23 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 38.21 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz Band 2: IEEE 802.11a: 17.11 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz Band 3: IEEE 802.11a: 17.11 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 29.18 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 77.57 MHz Band 4: IEEE 802.11a: 27.79 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 28.57 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz

Maximum Conducted Output Power	Band 1: IEEE 802.11a: 20.42 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 20.45 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 21.06 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 14.07 dBm Band 2: IEEE 802.11a: 19.33 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 19.30 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 19.15 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 16.41 dBm Band 3: IEEE 802.11a: 19.16 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 19.29 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 19.20 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 19.25 dBm Band 4: IEEE 802.11a: 21.52 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 21.58 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 17.00 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 14.19 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input type="checkbox"/> With TPC	<input checked="" type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input checked="" type="checkbox"/> With 5600~5650MHz	<input type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input checked="" type="checkbox"/> Mobile and portable client devices	

**Antenna and Band width**

Antenna	Two (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

N/A



### 3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	Bluetooth
1	arcadyan	120800021300J	PCB Antenna	I-PEX	4.01	7.65	-
2	arcadyan	120800021400J	PCB Antenna	I-PEX	3.77	5.03	-
3	arcadyan	120800021500J	PCB Antenna	I-PEX	-	-	4.66

<For WLAN Function>

For IEEE 802.11a/b/g/n/ac mode (2TX/2RX)


Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

<For Bluetooth Function>

For Bluetooth mode (1TX/1RX)

Only Chain 3 can be used as transmitting/receiving antenna.

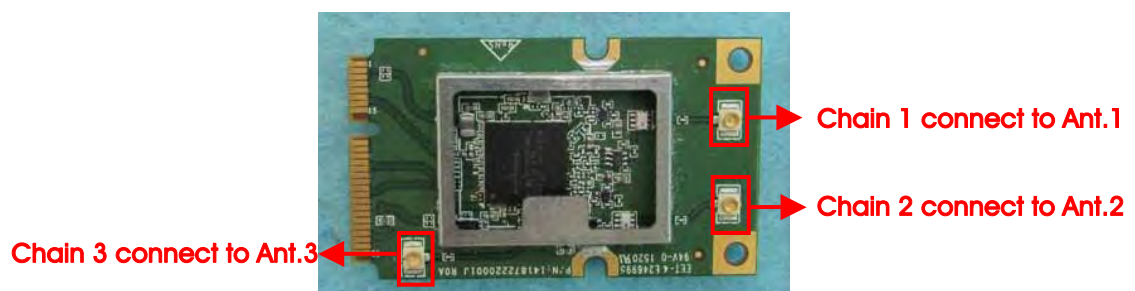

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 118, 126, 134, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 58, 106, 122, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510 MHz	122	5610 MHz
	104	5520 MHz	124	5620 MHz
	106	5530 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1~4	6Mbps	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT20	Band 1~4	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT40	Band 1~4	MCS0/Nss1	38/46/54/62/ 102/110/134/15 1/159	1+2
	11ac VHT80	Band 1~4	MCS0/Nss1	42/58/106/122/ 155	1+2
Power Spectral Density	11a/BPSK	Band 1~4	6Mbps	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT20	Band 1~4	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT40	Band 1~4	MCS0/Nss1	38/46/54/62/ 102/110/134/15 1/159	1+2
	11ac VHT80	Band 1~4	MCS0/Nss1	42/58/106/122/ 155	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1~4	6Mbps	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT20	Band 1~4	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2

	11ac VHT40	Band 1~4	MCS0/Nss1	38/46/54/62/ 102/110/134/15 1/159	1+2
	11ac VHT80	Band 1~4	MCS0/Nss1	42/58/106/122/ 155	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1~4	6Mbps	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT20	Band 1~4	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140 /149/157/165/	1+2
	11ac VHT40	Band 1~4	MCS0/Nss1	38/46/54/62/ 102/110/134/15 1/159	1+2
	11ac VHT80	Band 1~4	MCS0/Nss1	42/58/106/122/ 155	1+2
Band Edge Emission	11a/BPSK	Band 1~4	6Mbps	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT20	Band 1~4	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140 /149/157/165	1+2
	11ac VHT40	Band 1~4	MCS0/Nss1	38/46/54/62/ 102/110/134/15 1/159	1+2
	11ac VHT80	Band 1~4	MCS0/Nss1	42/58/106/122/ 155	1+2
Frequency Stability	20 MHz	Band 1~4	-	40/60/116/157	1+2
	40 MHz	Band 1~4	-	38/62/110/151	1+2
	80 MHz	Band 1~4	-	42/58/106/155	1+2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Below 1GHz):**

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above 1GHz):**

Mode 1. EUT X axis

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with below functions; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix C) and Radiated Emission Co-location (please refer to Appendix D) tests are added for simultaneously transmit.

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook *2	DELL	E6430	DoC
AP	Planex	GW-AP54SGX	KA220030603014-1
Earphone	e-Power	S90W	N/A
Mouse	HP	FM100	DoC
Fixture*2	Arcadyan	N/A	N/A
Device	Arcadyan	WN8722BTAAC-VO	N/A

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
Wireless ac AP	Netgear	R6300V2	PY313200227
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Fixture*2	Arcadyan	N/A	N/A
Device	Arcadyan	WN8722BTAAC-VO	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Fixture	Arcadyan	N/A	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool 2.0.2.3											
Mode	Test Frequency (MHz)											
	NCB: 20MHz											
	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	62	65	69	64	64	62	64	64	60	64	80	70
802.11ac MCS0/Nss1 VHT20	60	65	72	65	65	60	64	78	60	62	80	68
Mode	NCB: 40MHz											
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz	5755 MHz	5795 MHz			
	48	69	60	52	54	65	65	50	59			
Mode	NCB: 80MHz											
802.11ac MCS0/Nss1 VHT80	5210 MHz		5290 MHz		5530 MHz		5610 MHz		5775 MHz			
	45		54		52		67		50			

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.049	2.077	98.63%	0.06	0.01
802.11ac MCS0/Nss1 VHT20	1.911	1.952	97.90%	0.09	0.52
802.11ac MCS0/Nss1 VHT40	0.910	0.975	93.33%	0.30	1.10
802.11ac MCS0/Nss1 VHT80	0.428	0.486	88.07%	0.55	2.34

### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

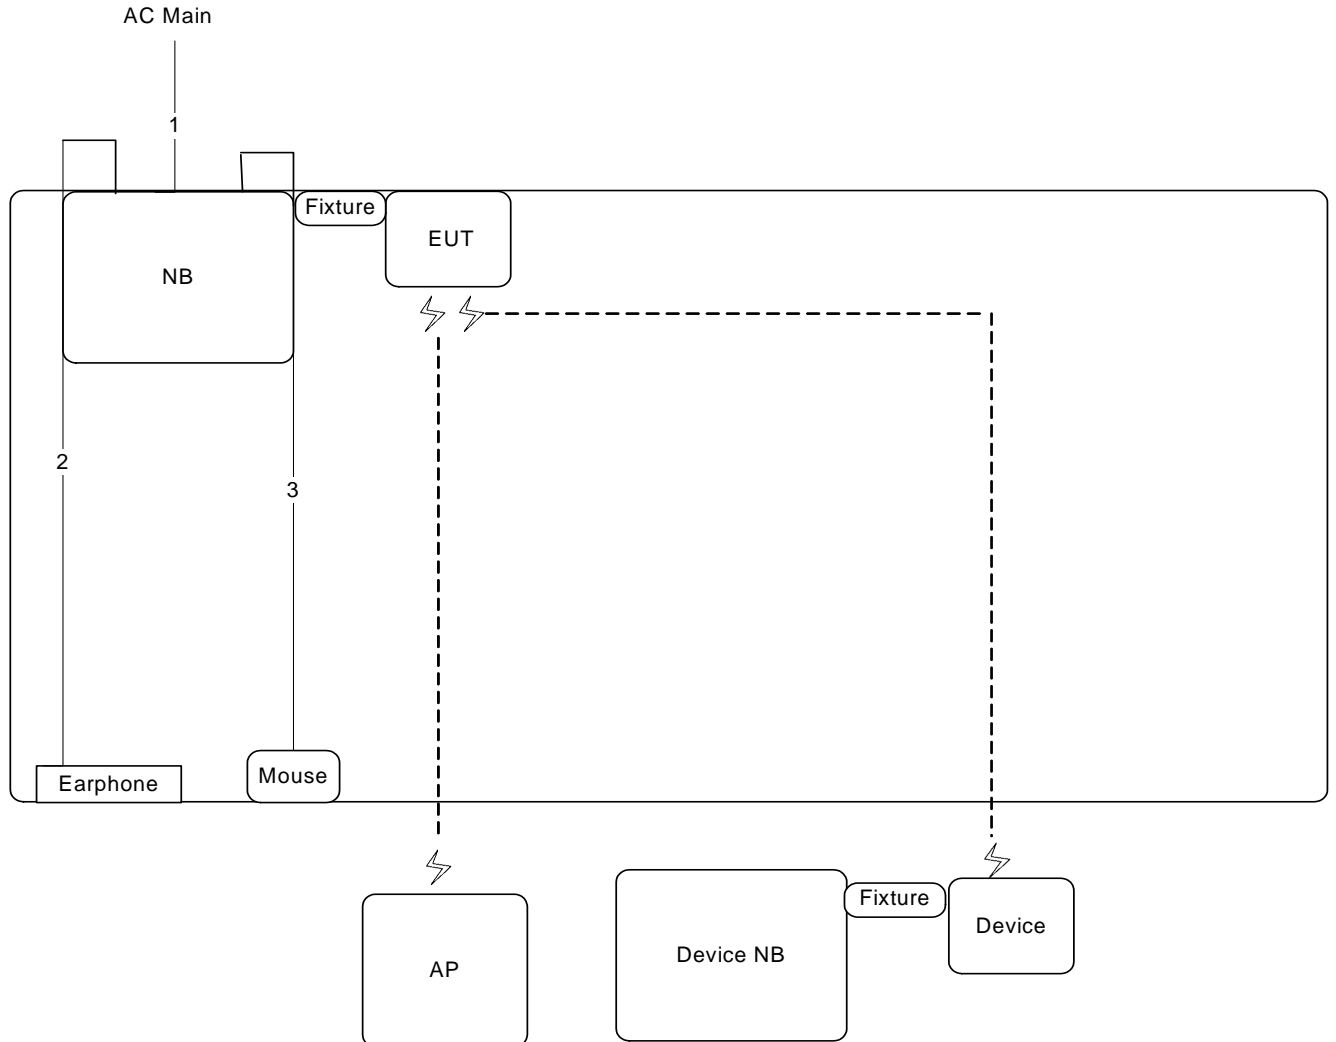


Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.4m
3	USB cable	Yes	1.8m




### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

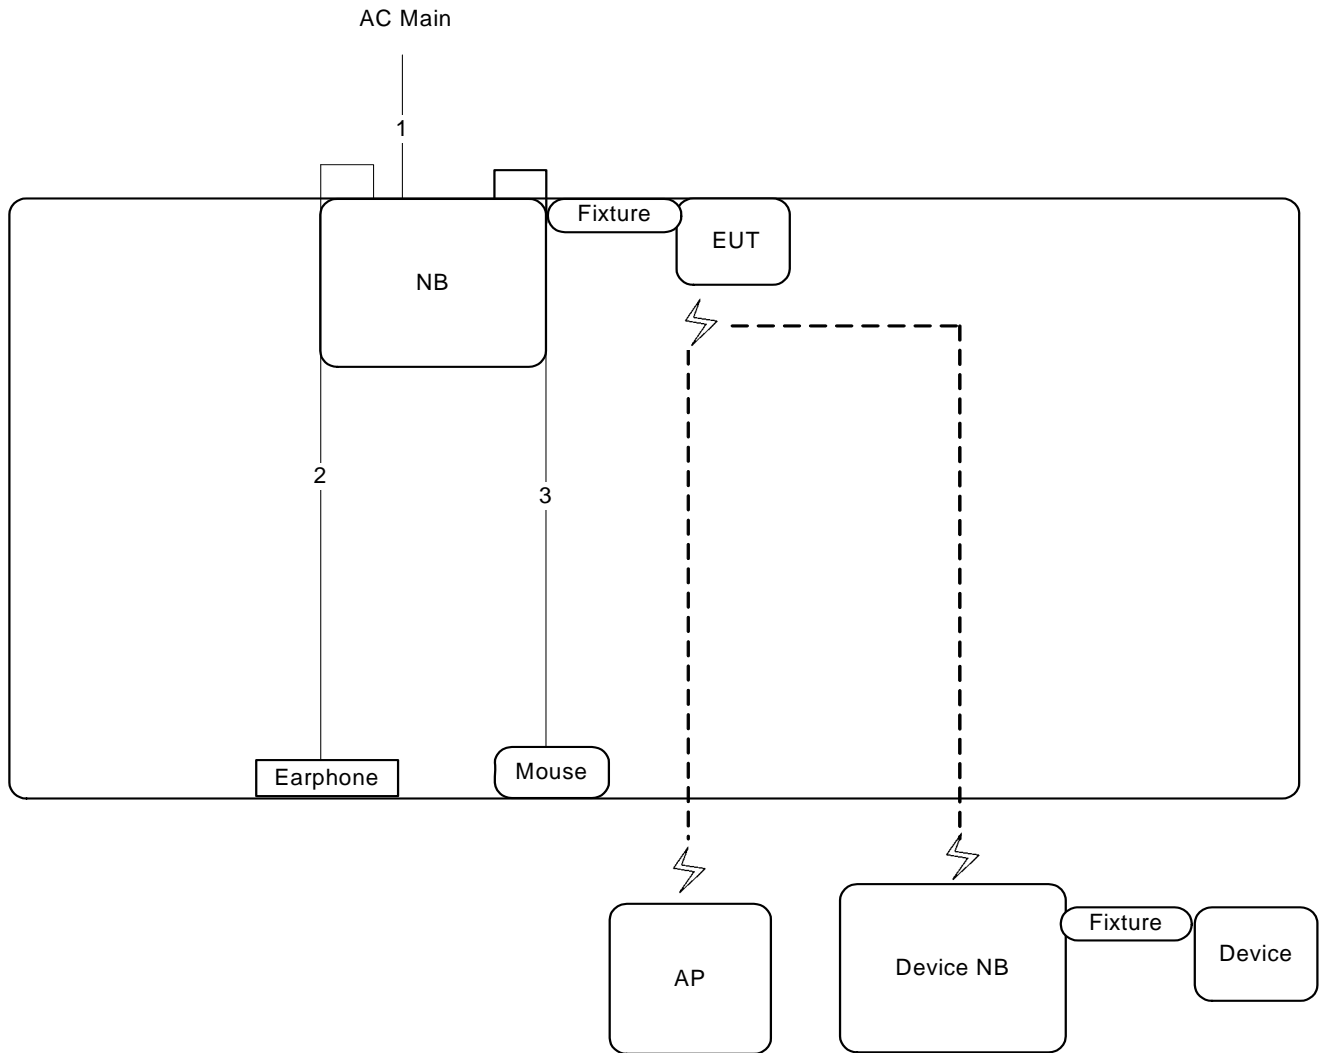

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.4m
3	USB cable	Yes	1.8m

Test Configuration: above 1GHz

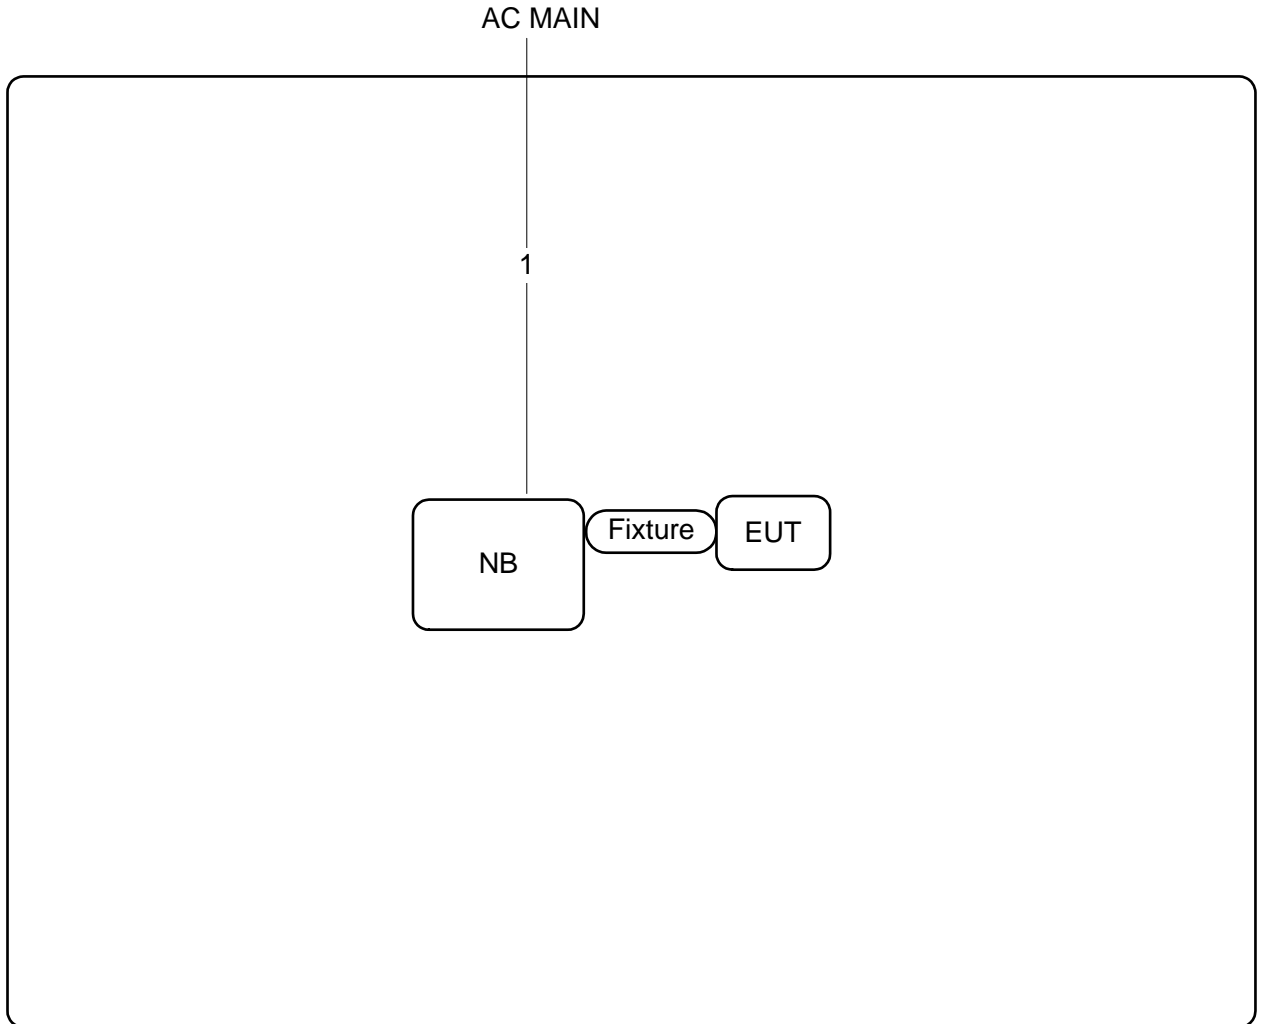

Item	Connection	Shielded	Length
1	Power cable	No	2.6m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

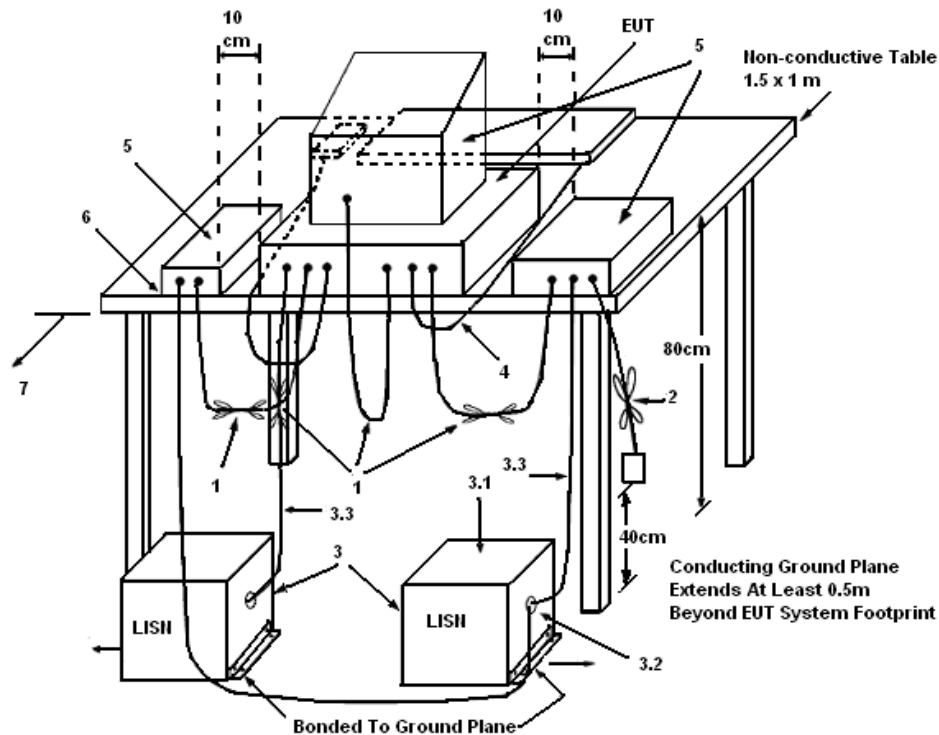

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	70%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link / Mode 1		

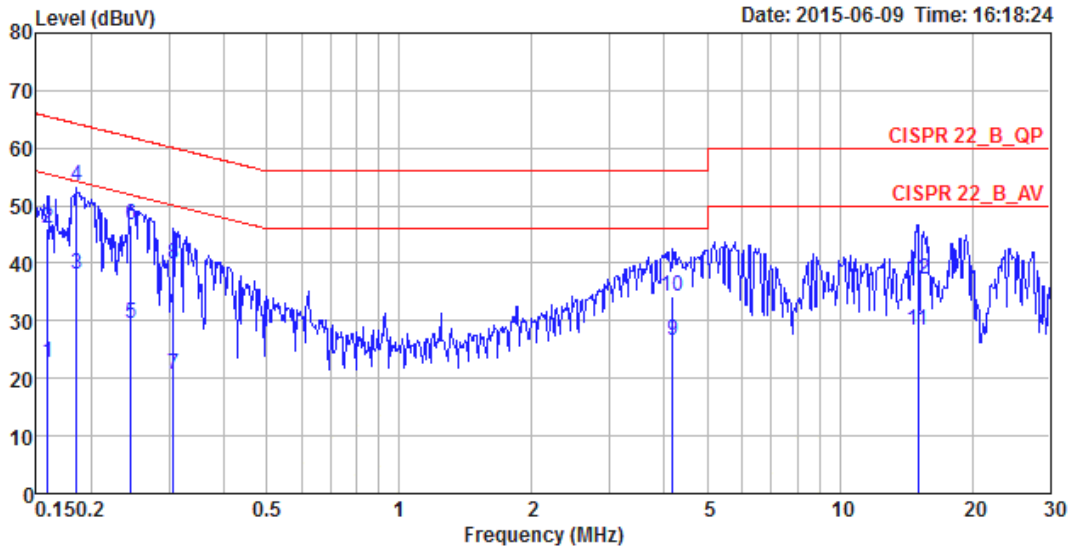

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1590	22.83	-32.69	55.52	12.88	9.93	0.02	LINE	Average
2	0.1590	45.94	-19.58	65.52	35.99	9.93	0.02	LINE	QP
3	0.1854	37.97	-16.27	54.24	28.02	9.93	0.02	LINE	Average
4	0.1854	53.43	-10.81	64.24	43.48	9.93	0.02	LINE	QP
5	0.2455	29.56	-22.35	51.91	19.60	9.93	0.03	LINE	Average
6	0.2455	46.59	-15.32	61.91	36.63	9.93	0.03	LINE	QP
7	0.3067	20.68	-29.38	50.06	10.71	9.93	0.04	LINE	Average
8	0.3067	39.72	-20.34	60.06	29.75	9.93	0.04	LINE	QP
9	4.1796	26.70	-19.30	46.00	16.59	10.03	0.08	LINE	Average
10	4.1796	34.19	-21.81	56.00	24.08	10.03	0.08	LINE	QP
11	15.0656	28.24	-21.76	50.00	17.65	10.33	0.26	LINE	Average
12	15.0656	37.33	-22.67	60.00	26.74	10.33	0.26	LINE	QP

Temperature	24°C	Humidity	70%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link / Mode 1		

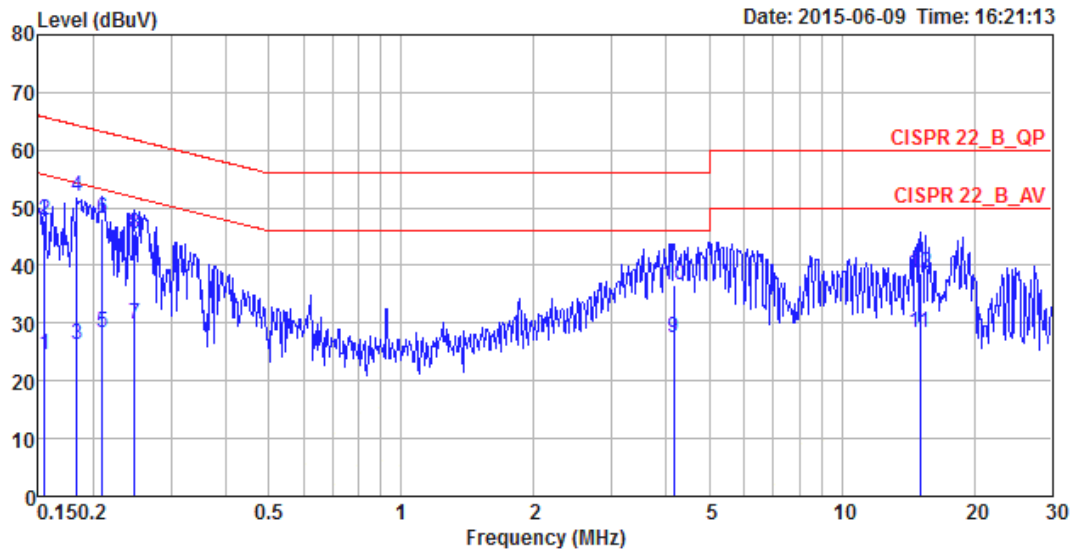

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1548	24.57	-31.17	55.74	14.77	9.78	0.02	NEUTRAL	Average
2	0.1548	47.82	-17.92	65.74	38.02	9.78	0.02	NEUTRAL	QP
3	0.1835	26.23	-28.10	54.33	16.42	9.79	0.02	NEUTRAL	Average
4	0.1835	51.89	-12.44	64.33	42.08	9.79	0.02	NEUTRAL	QP
5	0.2094	28.21	-25.02	53.23	18.40	9.79	0.02	NEUTRAL	Average
6	0.2094	48.14	-15.09	63.23	38.33	9.79	0.02	NEUTRAL	QP
7	0.2481	29.91	-21.91	51.82	20.09	9.79	0.03	NEUTRAL	Average
8	0.2481	45.35	-16.47	61.82	35.53	9.79	0.03	NEUTRAL	QP
9	4.1575	27.45	-18.55	46.00	17.51	9.87	0.07	NEUTRAL	Average
10	4.1575	36.66	-19.34	56.00	26.72	9.87	0.07	NEUTRAL	QP
11	15.0656	28.41	-21.59	50.00	18.04	10.11	0.26	NEUTRAL	Average
12	15.0656	38.57	-21.43	60.00	28.20	10.11	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth


Temperature	20°C	Humidity	46%
Test Engineer	Lucas Huang, Clemens Fang		

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	21.48	16.85
	5200 MHz	25.74	17.89
	5240 MHz	21.48	17.63
	5260 MHz	21.65	17.02
	5300 MHz	21.39	17.11
	5320 MHz	21.65	16.93
	5500 MHz	21.57	17.11
	5580 MHz	21.57	17.02
	5700 MHz	21.57	16.93
	5745 MHz	21.48	17.02
	5785 MHz	41.83	27.79
	5825 MHz	30.43	17.97
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.57	17.80
	5200 MHz	44.78	22.23
	5240 MHz	37.39	18.58
	5260 MHz	21.57	17.97
	5300 MHz	21.74	17.89
	5320 MHz	21.65	17.80
	5500 MHz	21.48	17.97
	5580 MHz	45.65	29.18
	5700 MHz	21.65	17.97
	5745 MHz	21.57	17.97
	5785 MHz	45.91	28.57
	5825 MHz	21.57	18.15




Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT40	5190 MHz	40.87	36.90
	5230 MHz	92.32	38.21
	5270 MHz	40.87	37.05
	5310 MHz	41.01	37.05
	5510 MHz	41.30	36.90
	5550 MHz	47.39	37.19
	5670 MHz	63.04	37.19
	5755 MHz	41.01	36.76
	5795 MHz	40.73	36.90
802.11ac MCS0/Nss1 VHT80	5210 MHz	82.03	76.12
	5290 MHz	82.32	76.12
	5530 MHz	172.46	77.57
	5610 MHz	160.58	77.28
	5775 MHz	82.03	76.41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5180 MHz

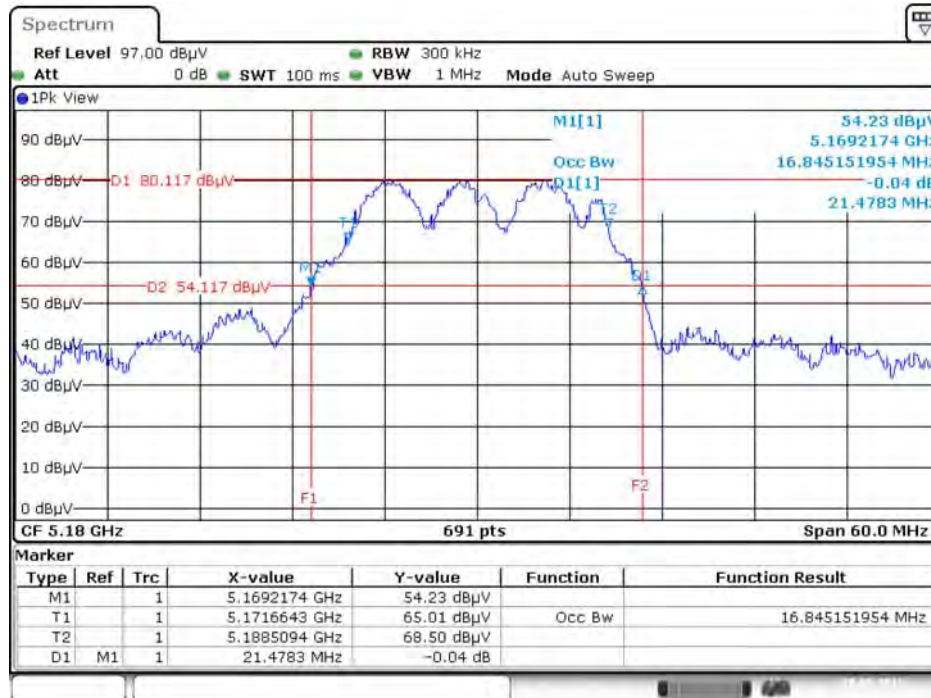


Date: 28.MAY.2015 16:34:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5200 MHz

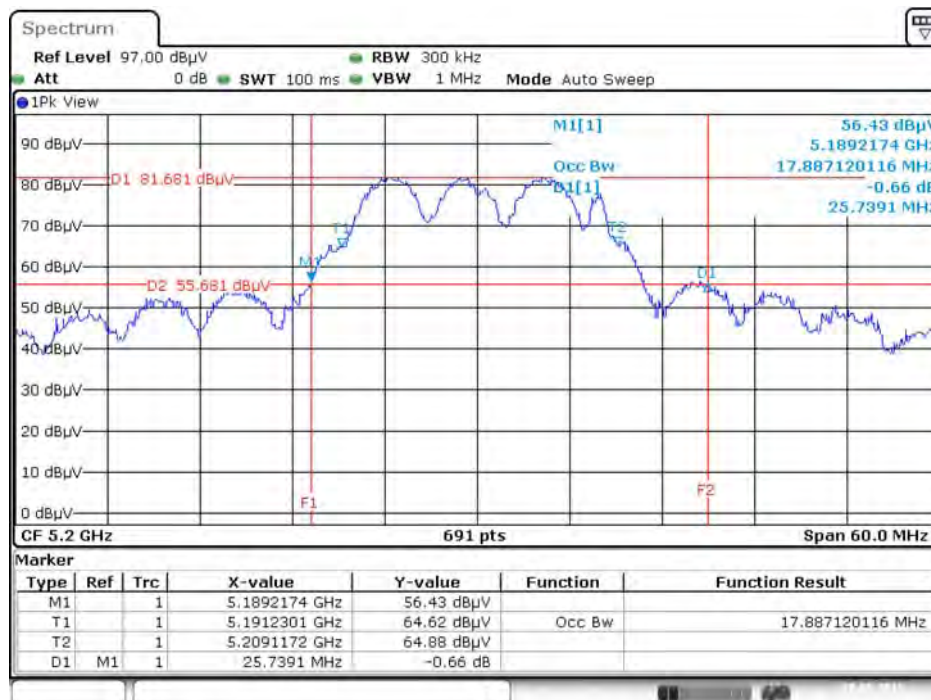


Date: 28.MAY.2015 16:35:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5240 MHz

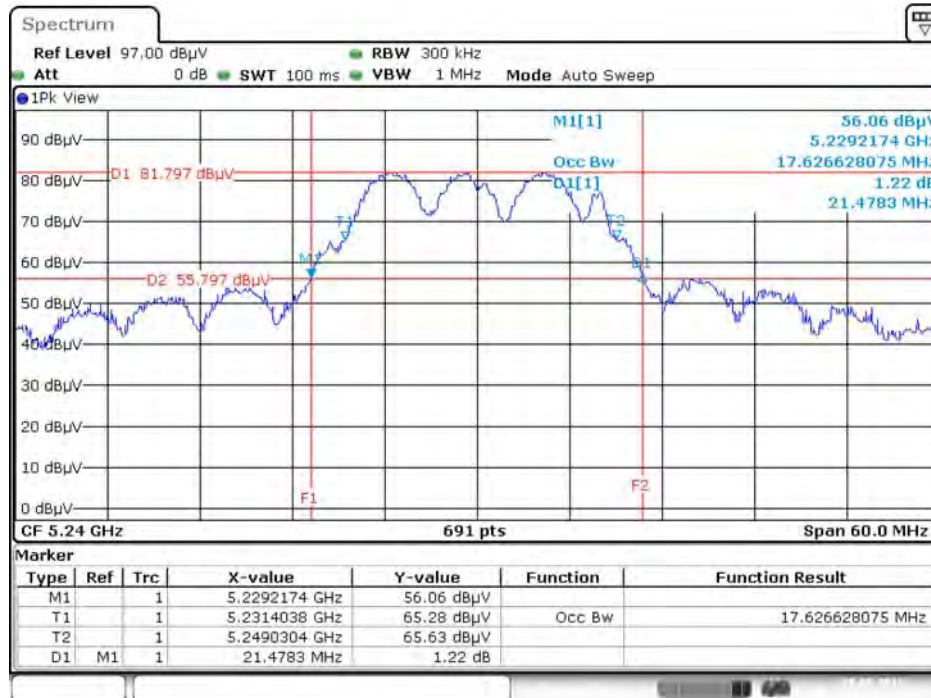


Date: 28.MAY.2015 16:36:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5260 MHz

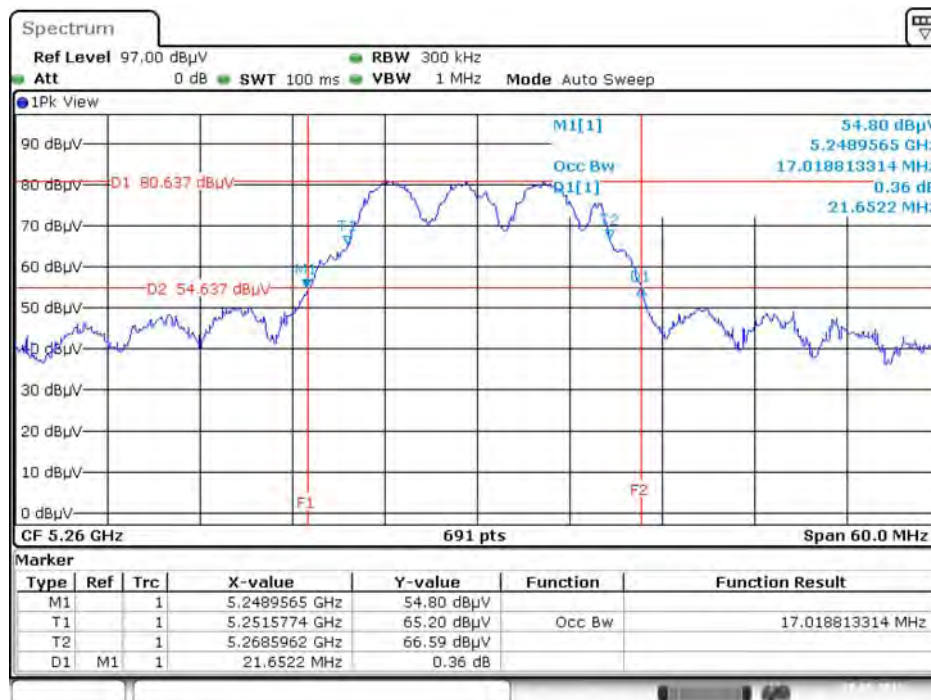


Date: 28.MAY.2015 16:37:40

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5300 MHz

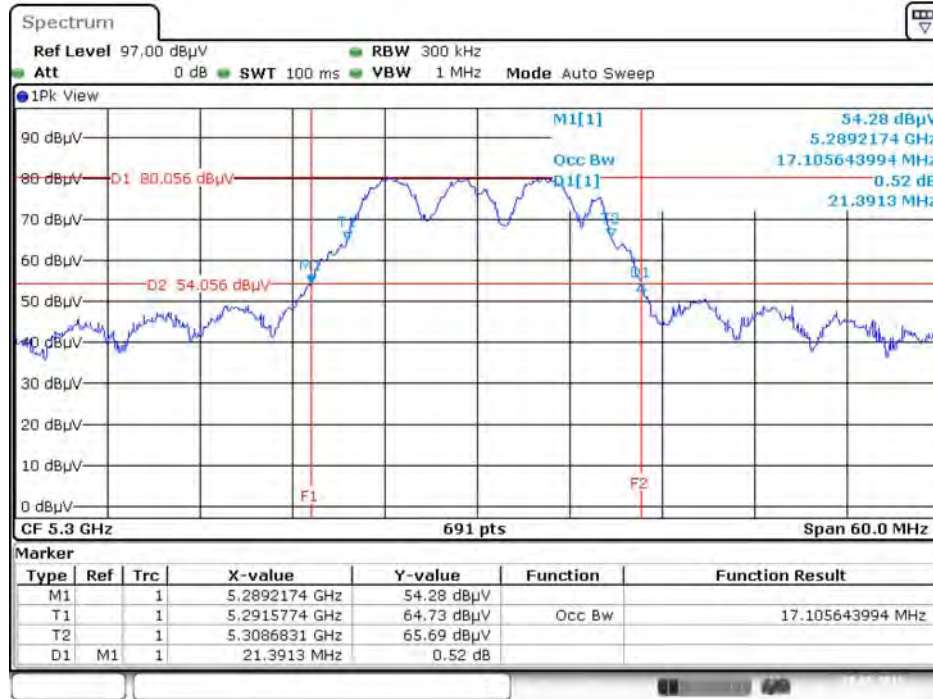

Date: 28.MAY.2015 16:38:23


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5320 MHz

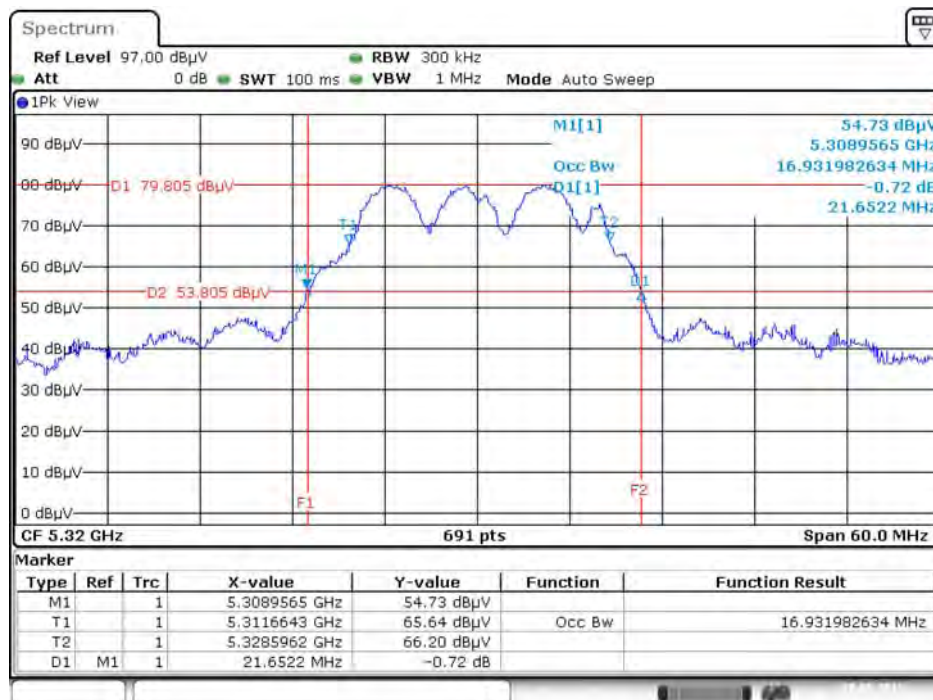

Date: 28.MAY.2015 16:39:04




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5500 MHz

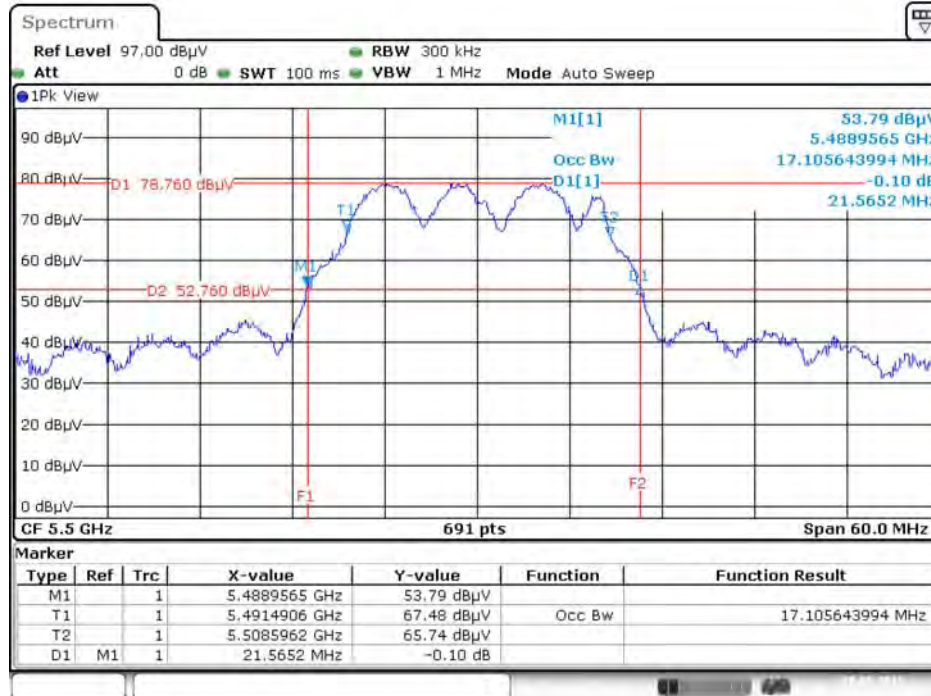


Date: 28.MAY.2015 16:39:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5580 MHz

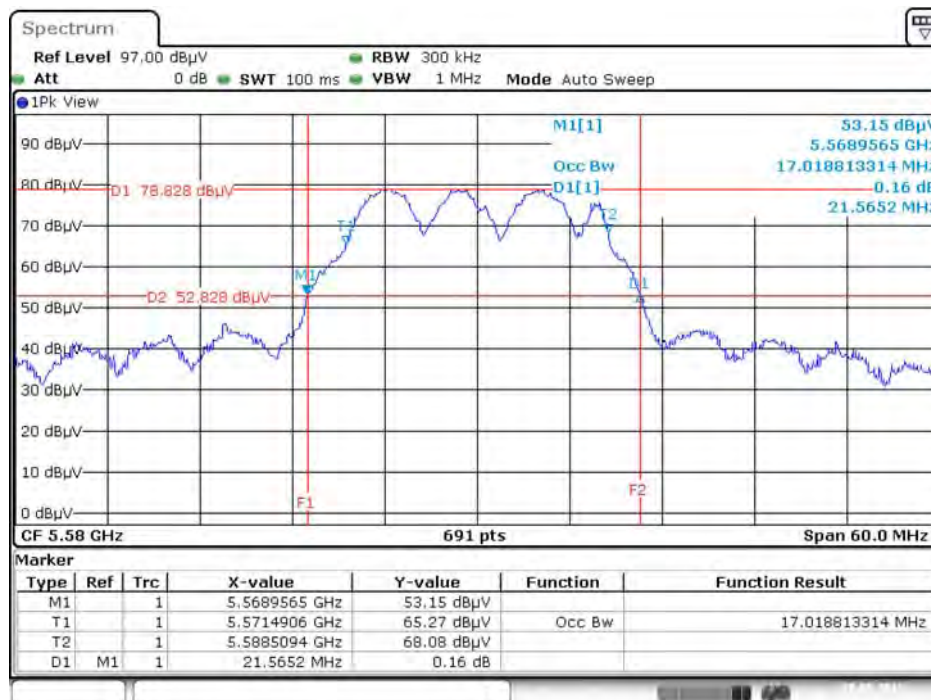


Date: 28.MAY.2015 16:40:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5700 MHz

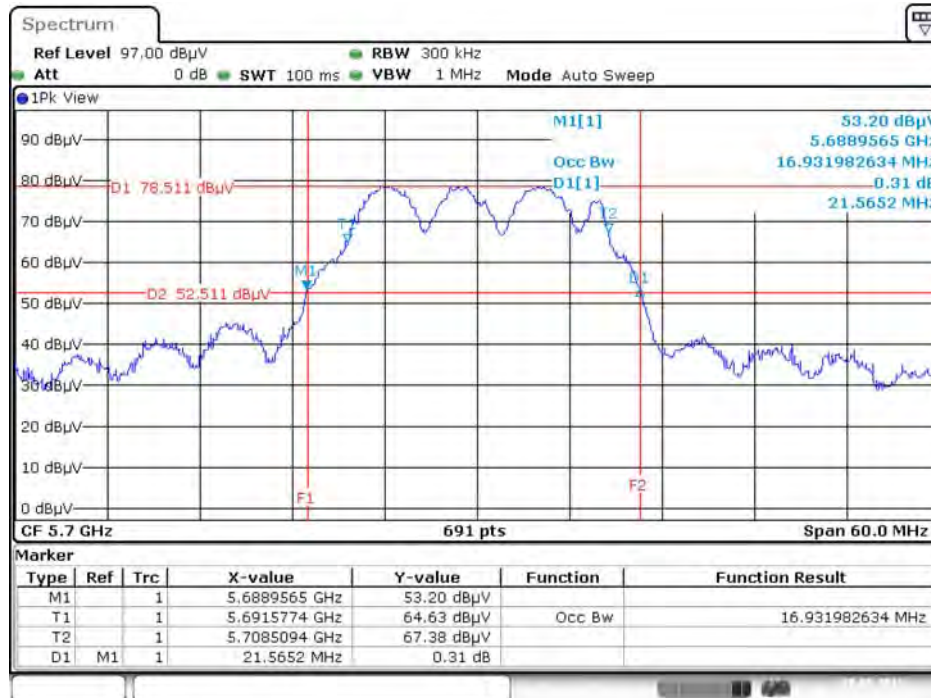


Date: 28.MAY.2015 16:41:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5745 MHz

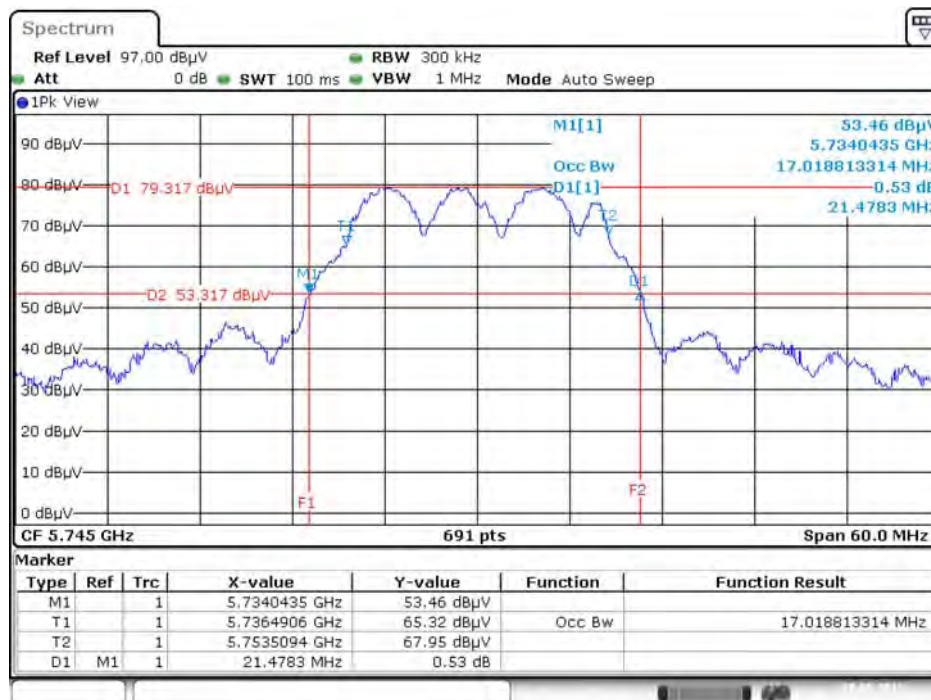


Date: 28.MAY.2015 16:41:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

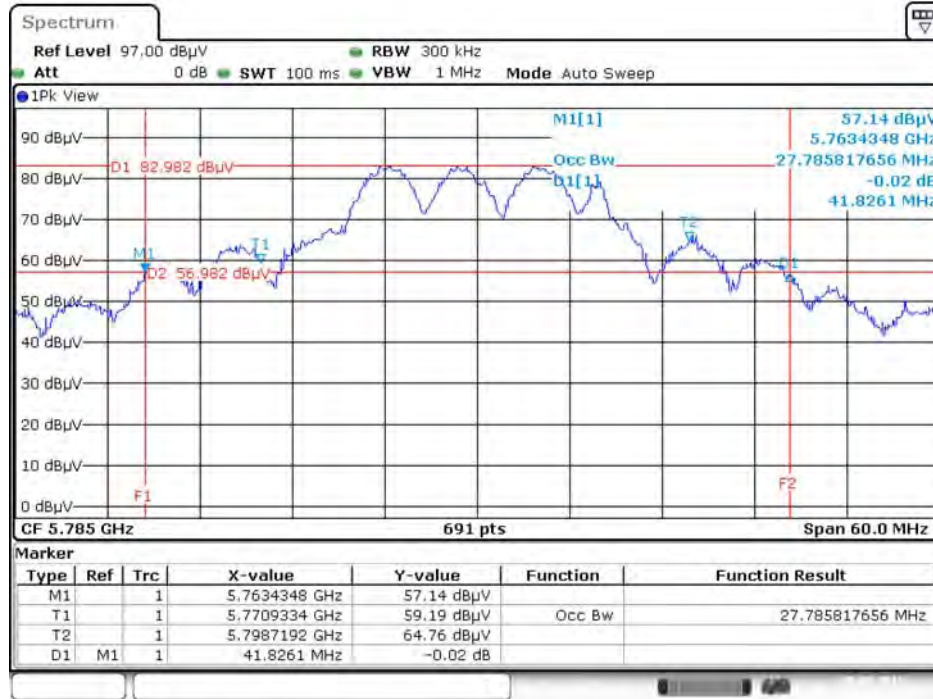

Date: 28.MAY.2015 16:42:30


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + / 5825 MHz

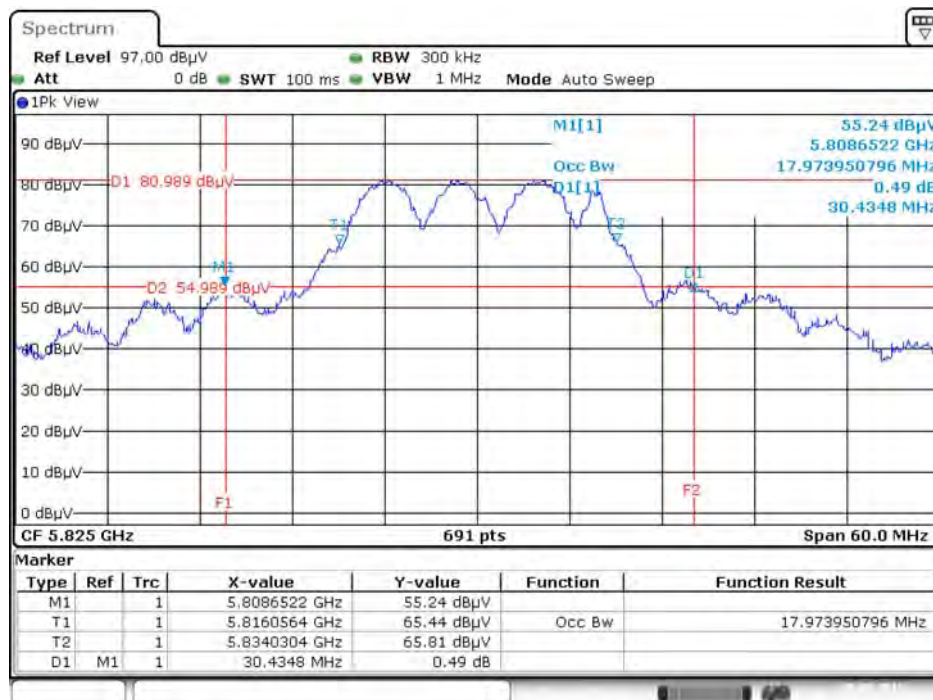

Date: 28.MAY.2015 16:43:08




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5180 MHz

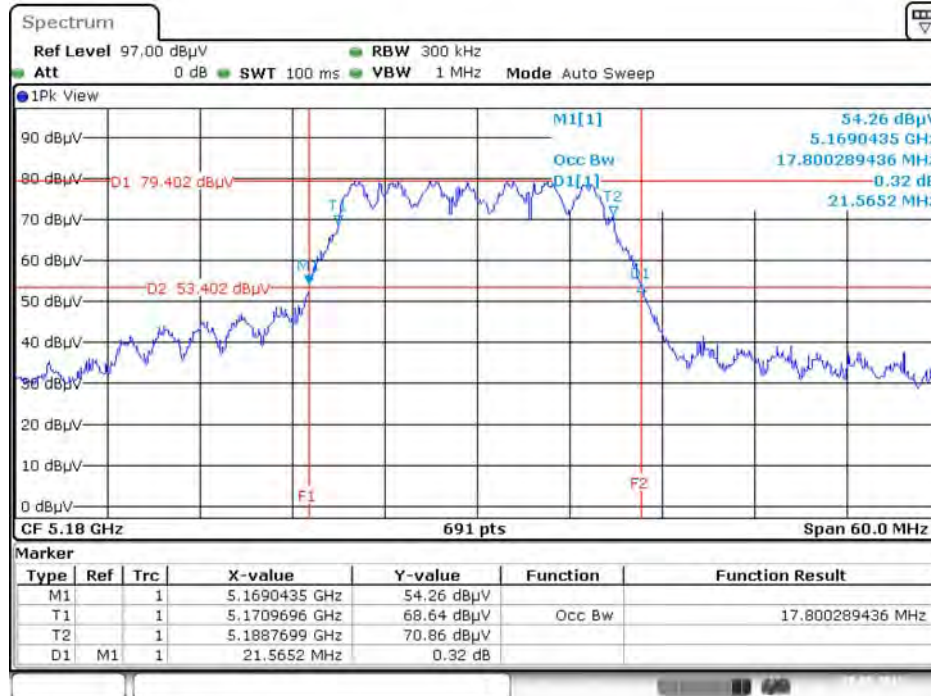

Date: 28.MAY.2015 16:45:14


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5200 MHz

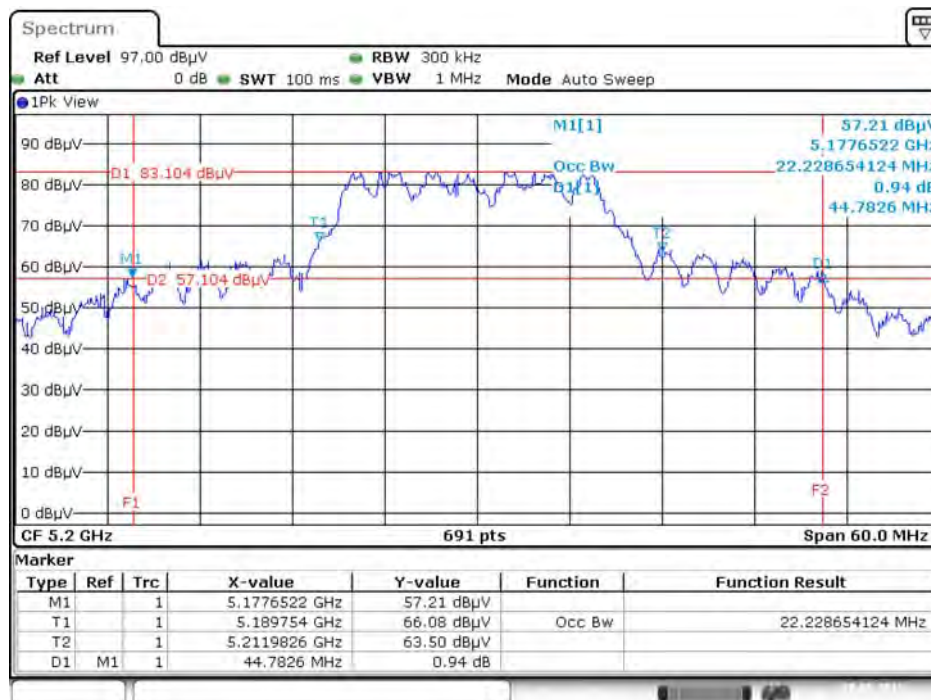

Date: 28.MAY.2015 16:45:50




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5240 MHz

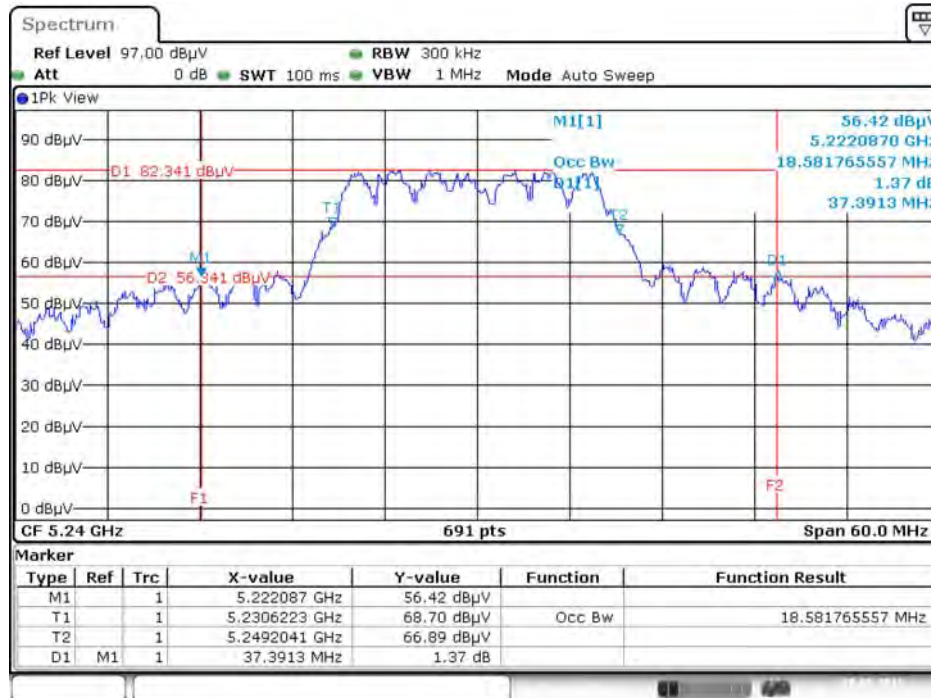


Date: 28.MAY.2015 16:46:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5260 MHz

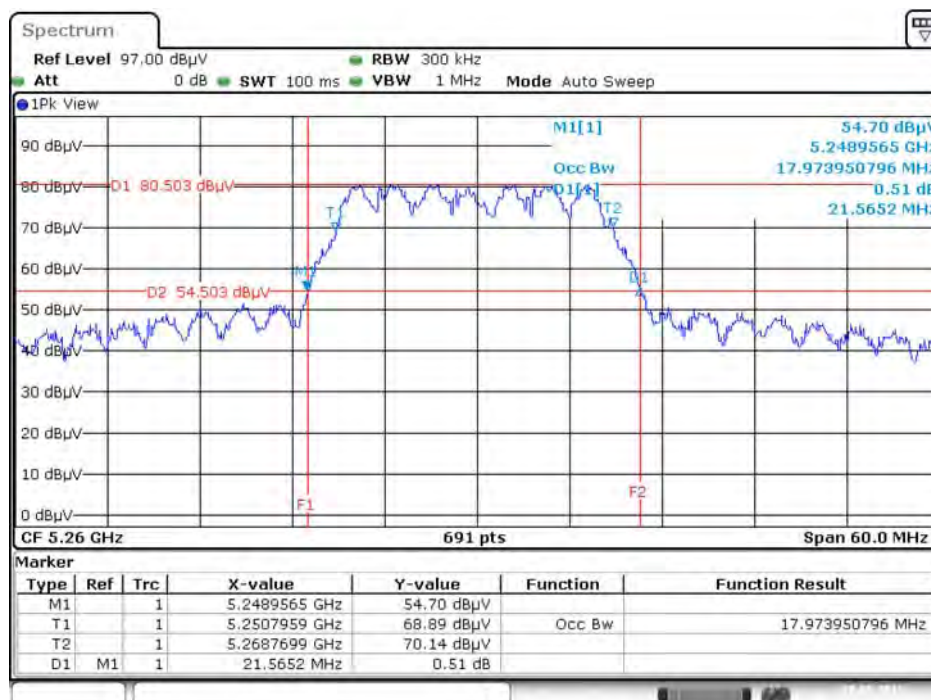


Date: 28.MAY.2015 16:47:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5300 MHz

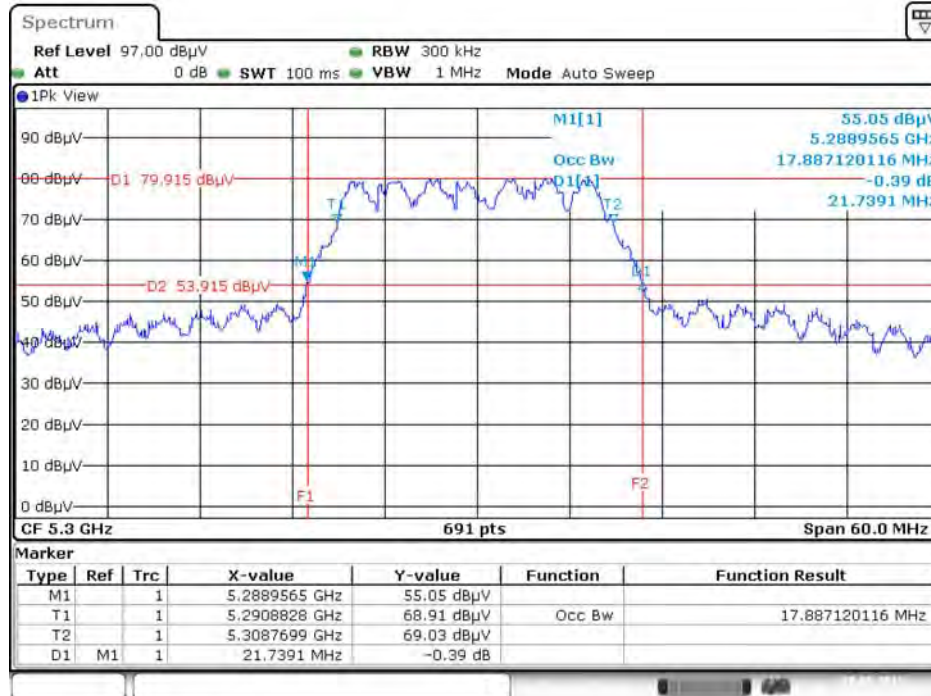


Date: 28.MAY.2015 16:48:00

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5320 MHz

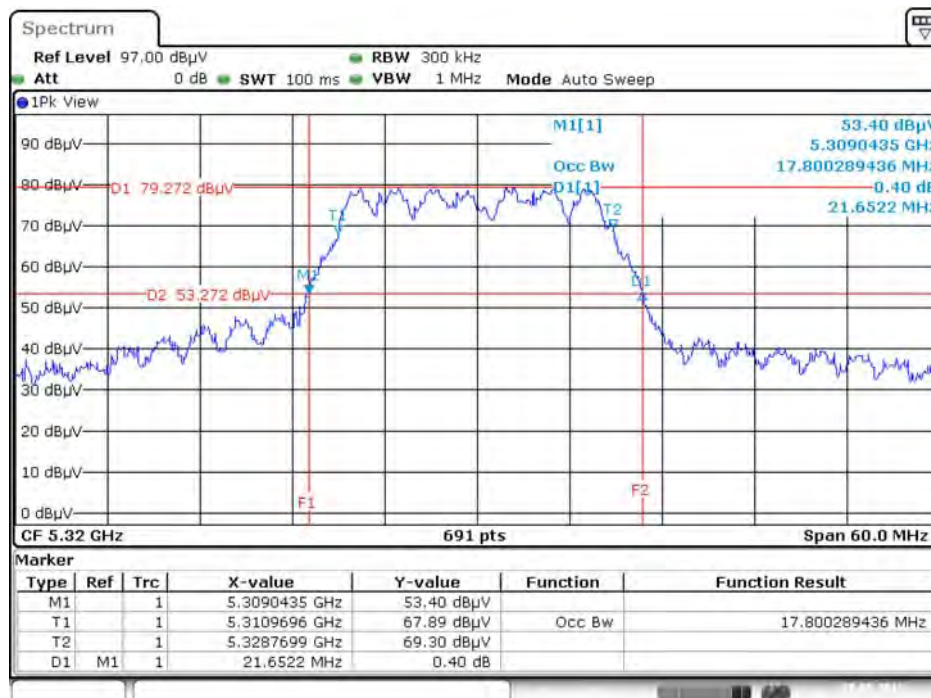


Date: 28.MAY.2015 16:48:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5500 MHz

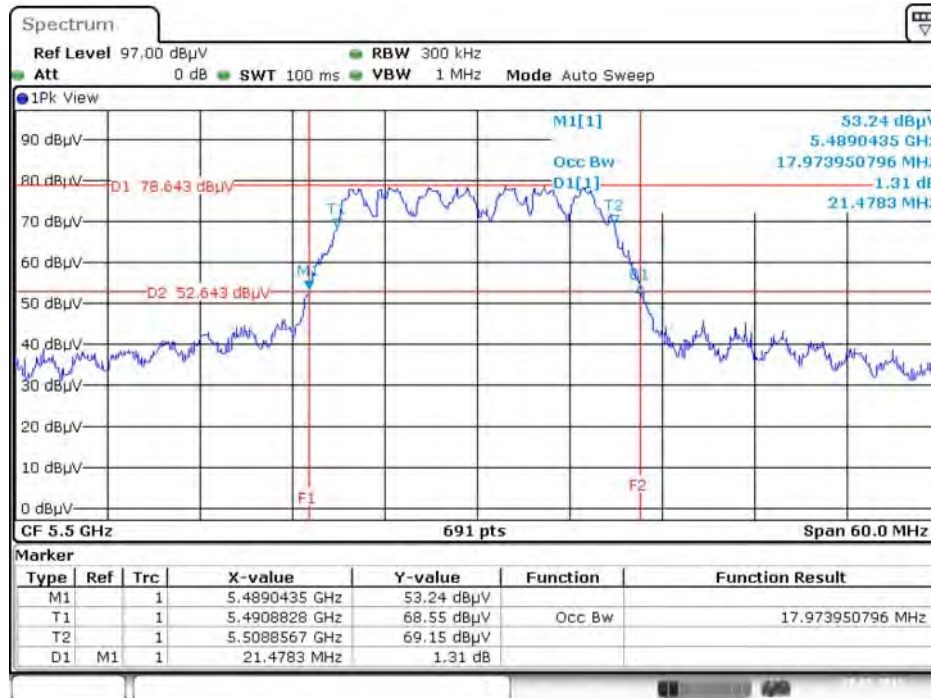

Date: 28.MAY.2015 16:49:26


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5580 MHz

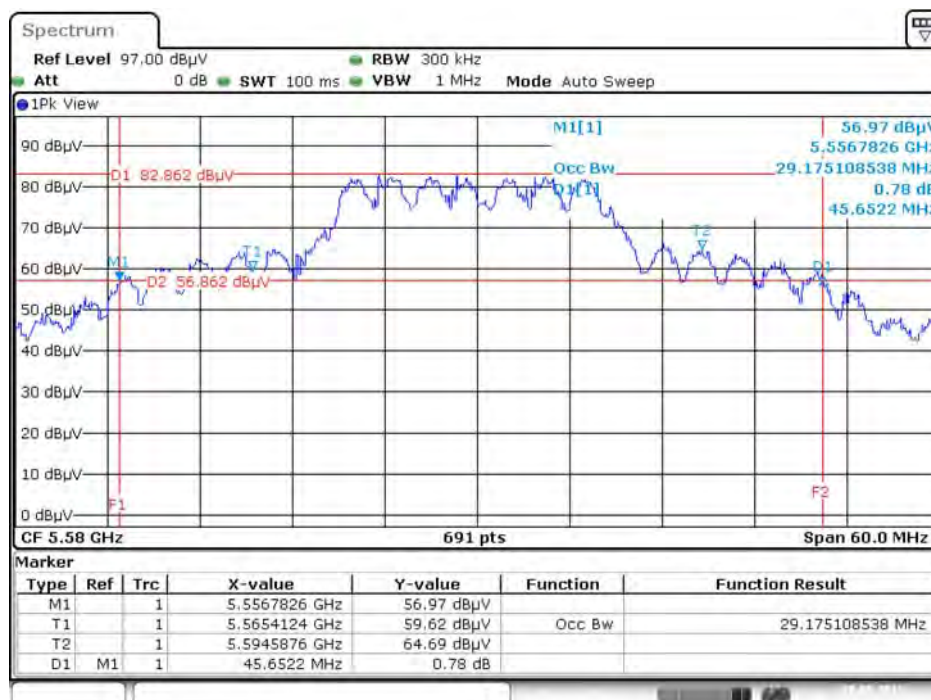

Date: 28.MAY.2015 16:50:08




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5700 MHz

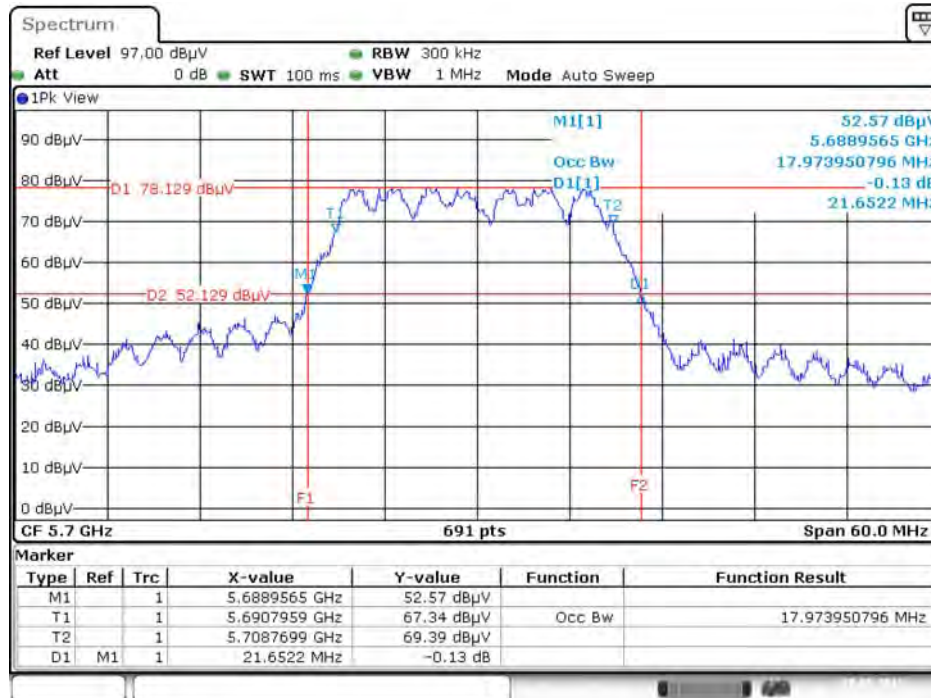


Date: 28.MAY.2015 16:50:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5745 MHz

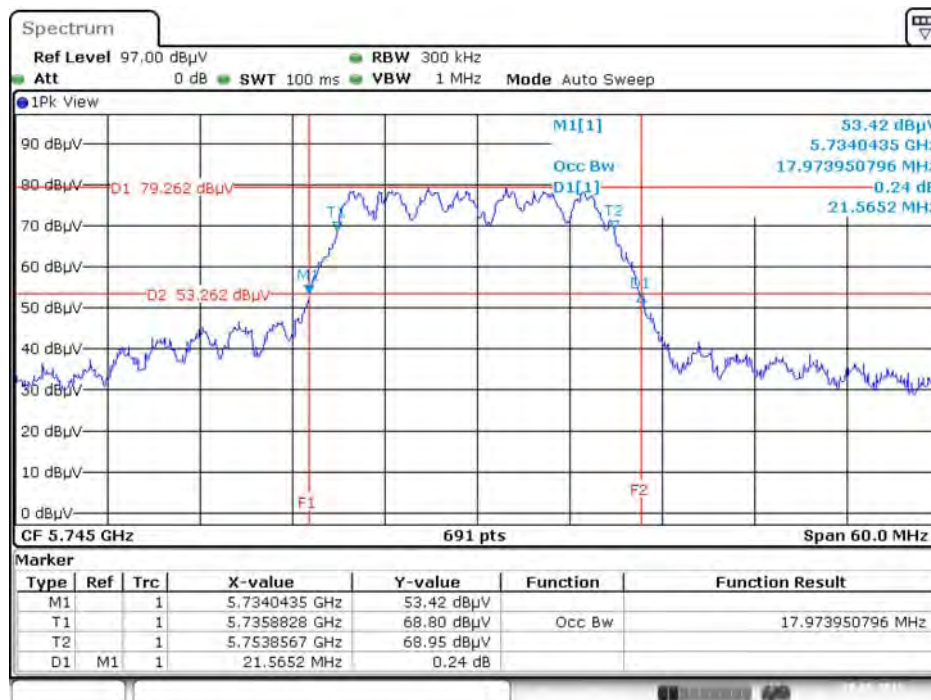


Date: 28.MAY.2015 16:51:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

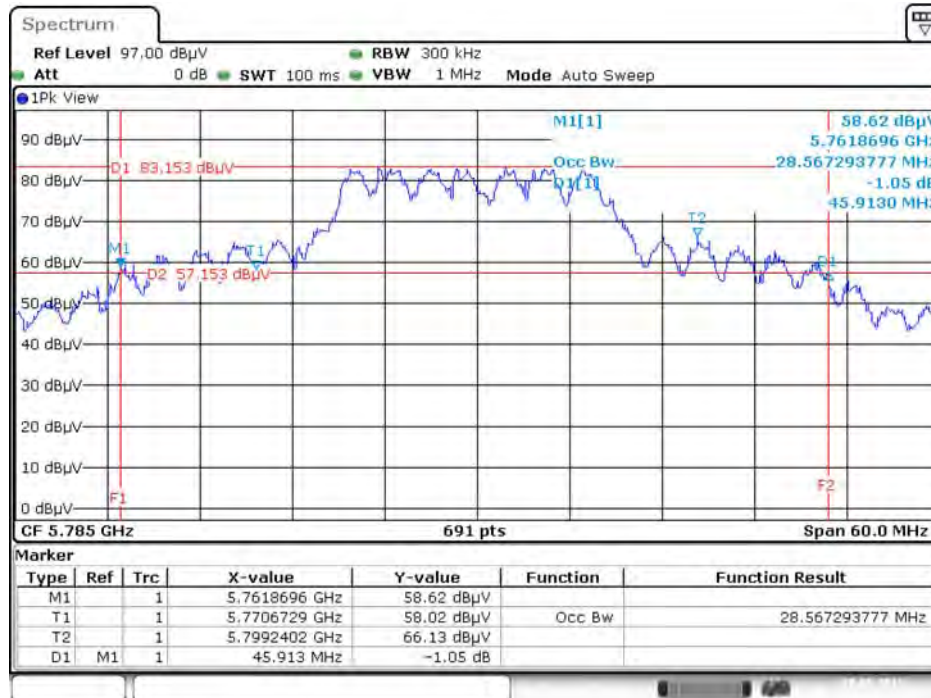


Date: 28.MAY.2015 16:52:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5825 MHz

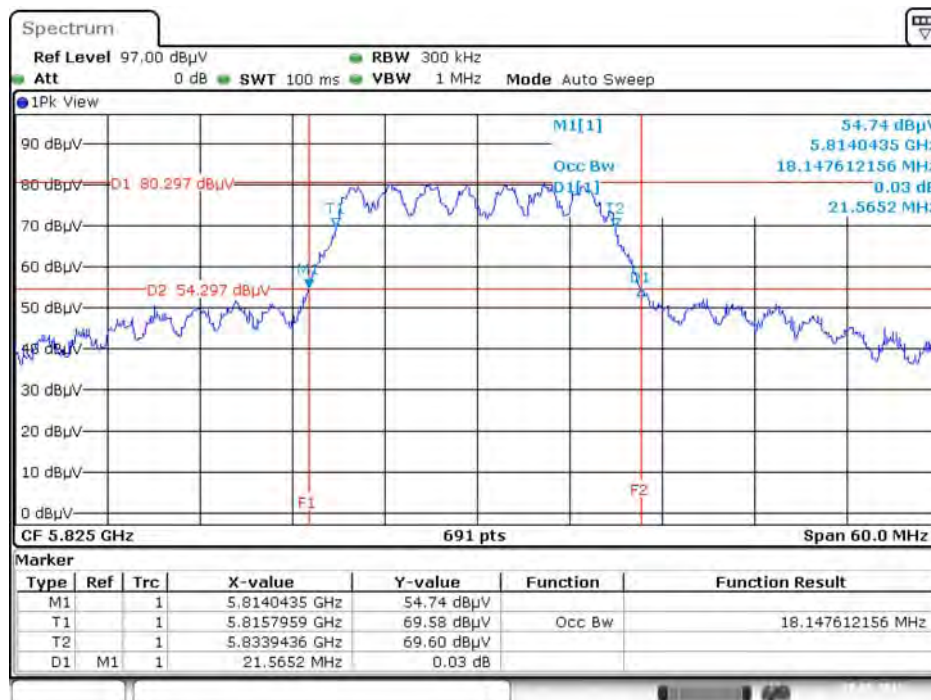


Date: 28.MAY.2015 16:52:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5190 MHz

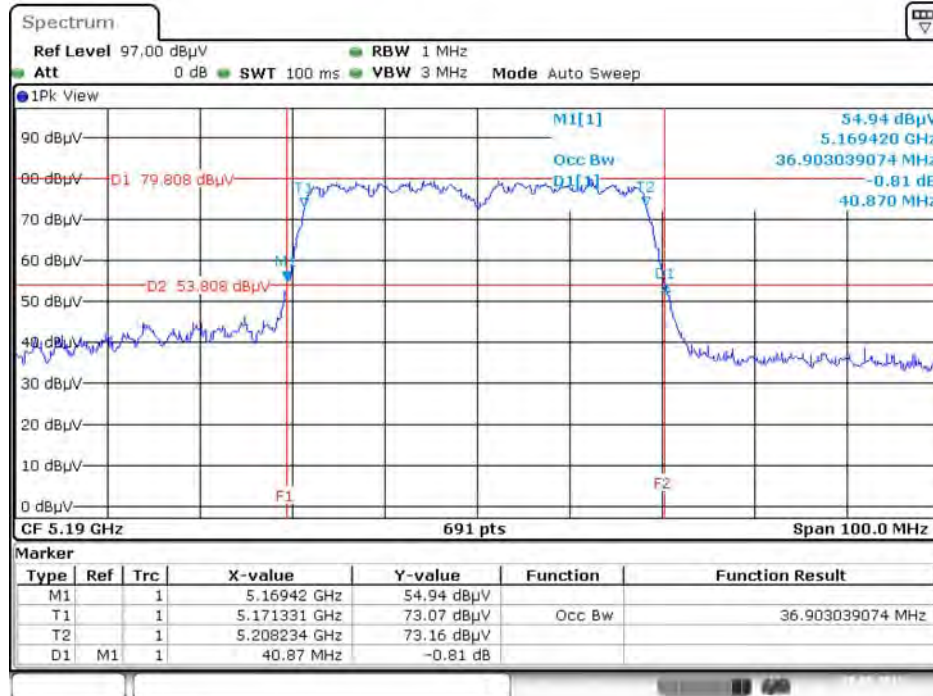

Date: 28.MAY.2015 16:54:40


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

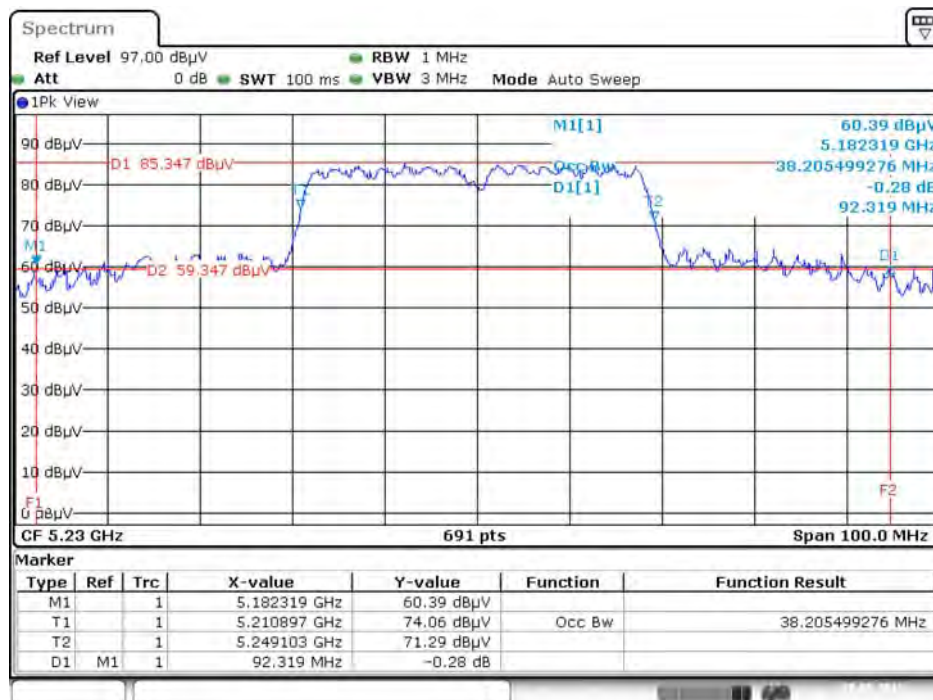

Date: 28.MAY.2015 16:55:18




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5270 MHz

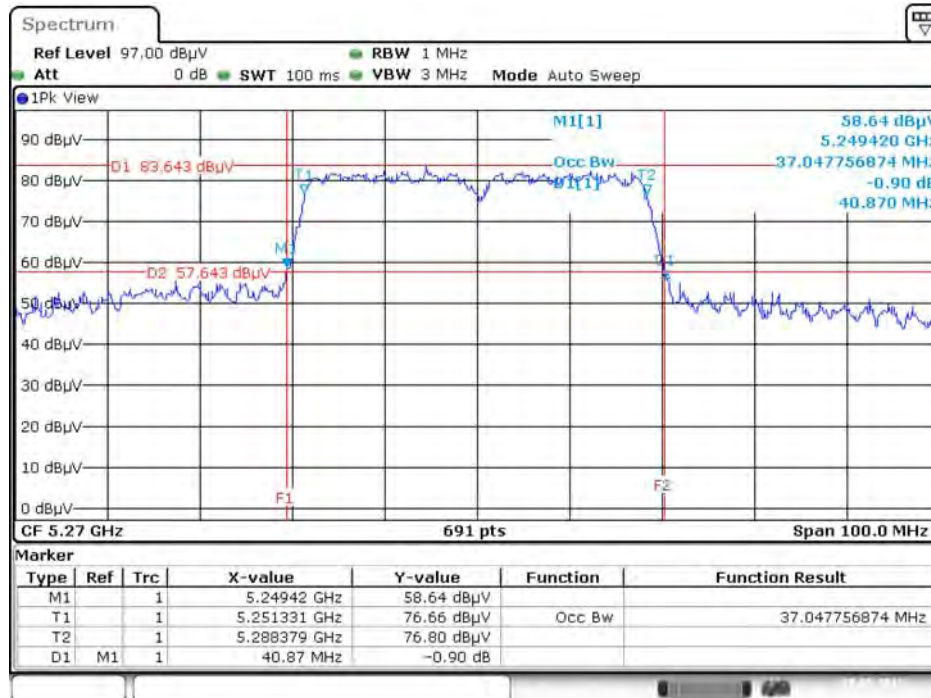


Date: 28.MAY.2015 16:56:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5310 MHz

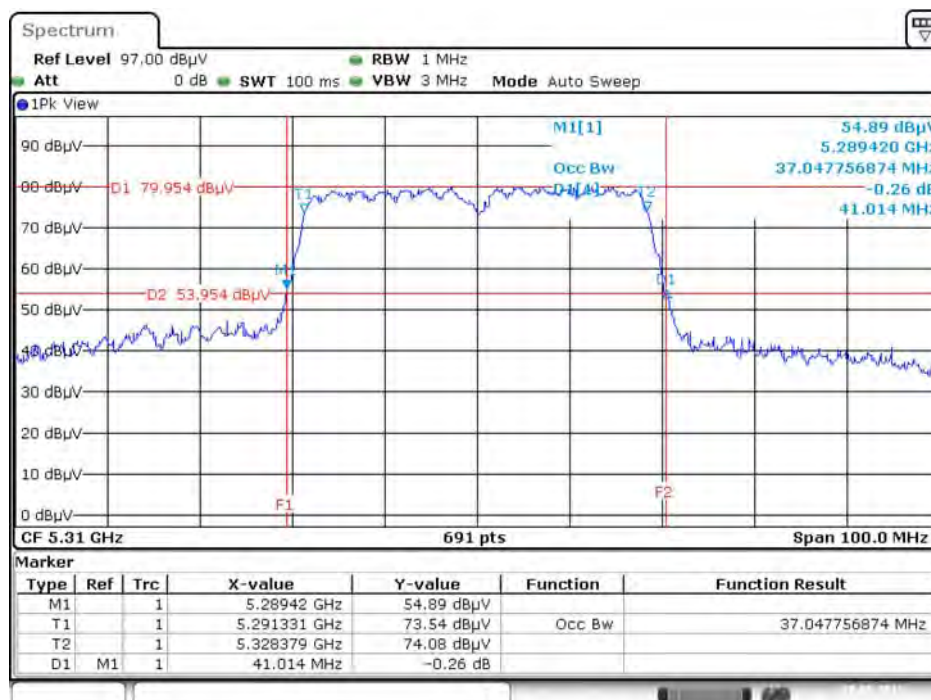


Date: 28.MAY.2015 16:57:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5510 MHz

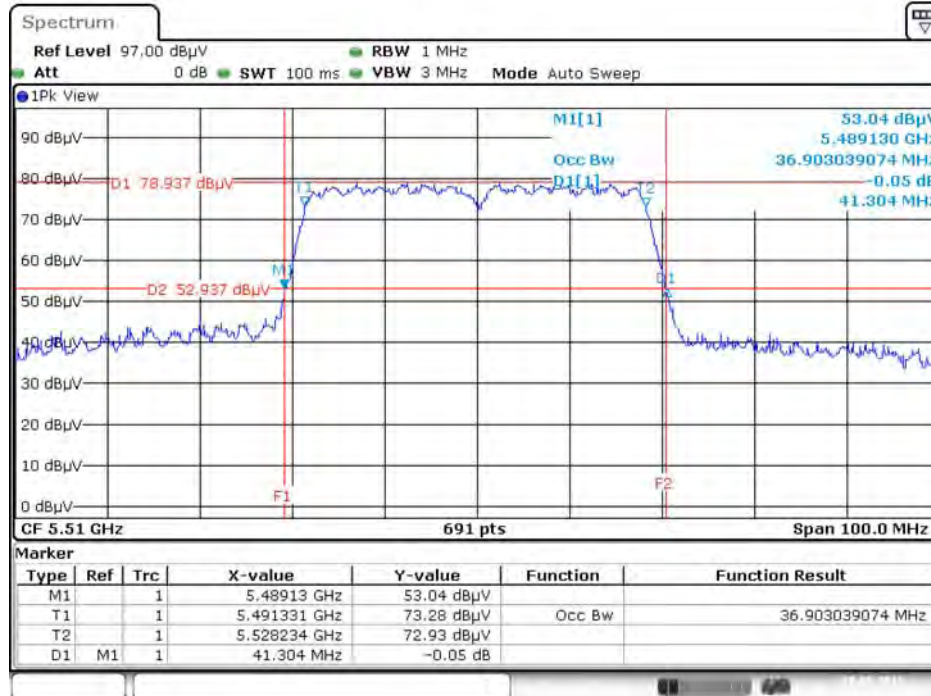

Date: 28.MAY.2015 16:57:46


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5550 MHz

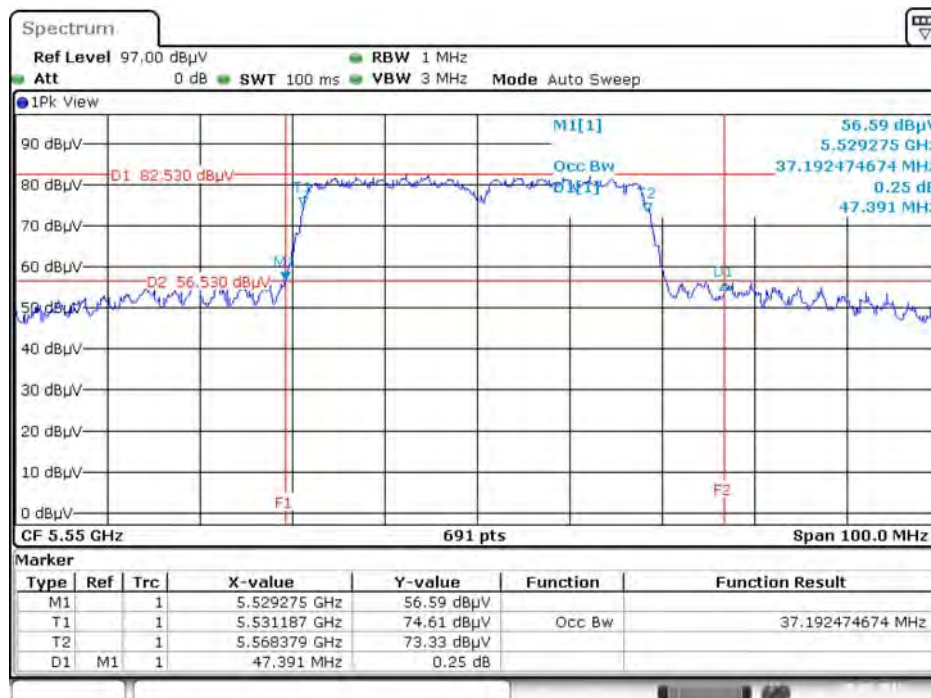

Date: 28.MAY.2015 16:58:32




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5670 MHz

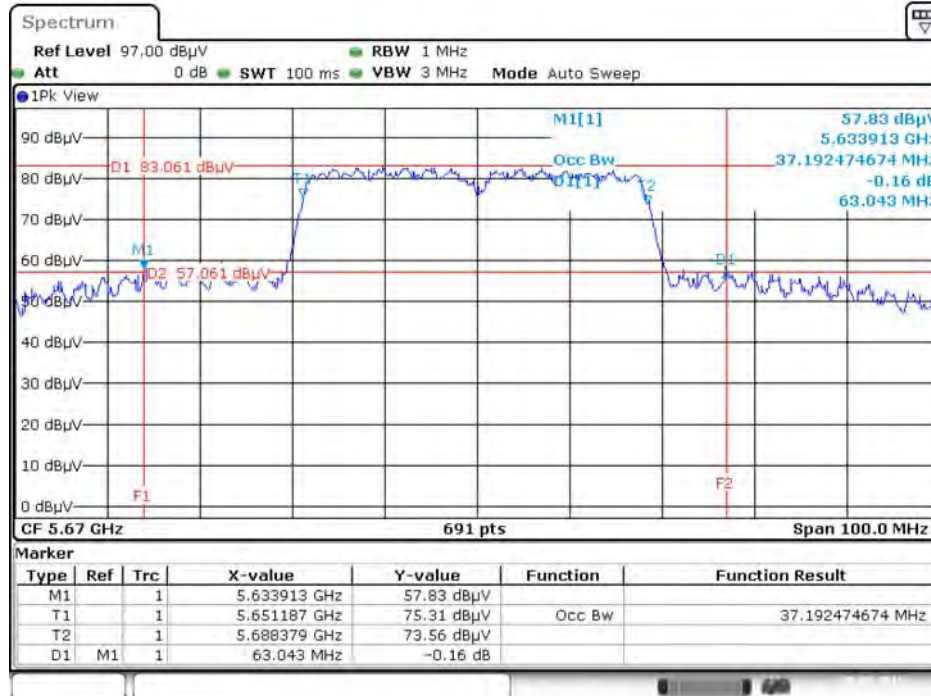


Date: 28.MAY.2015 16:59:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5755 MHz

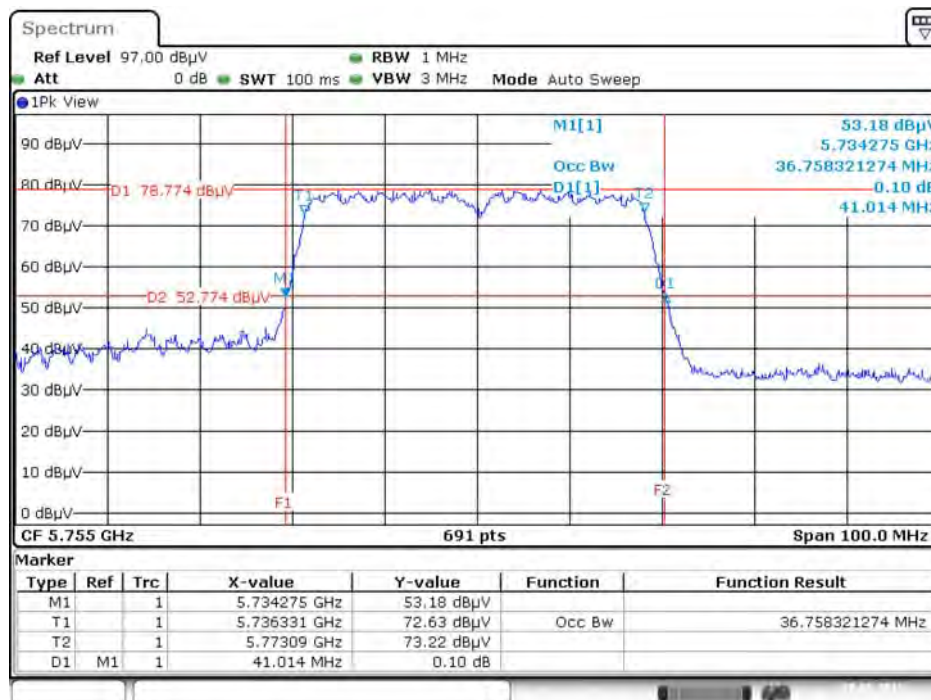


Date: 28.MAY.2015 17:00:02

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

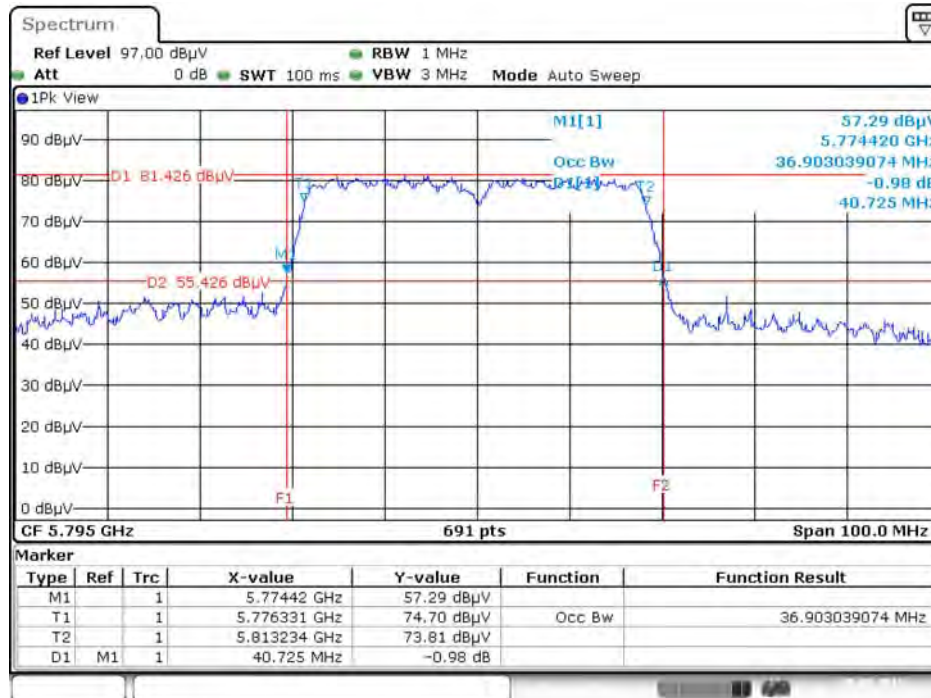


Date: 28.MAY.2015 17:00:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

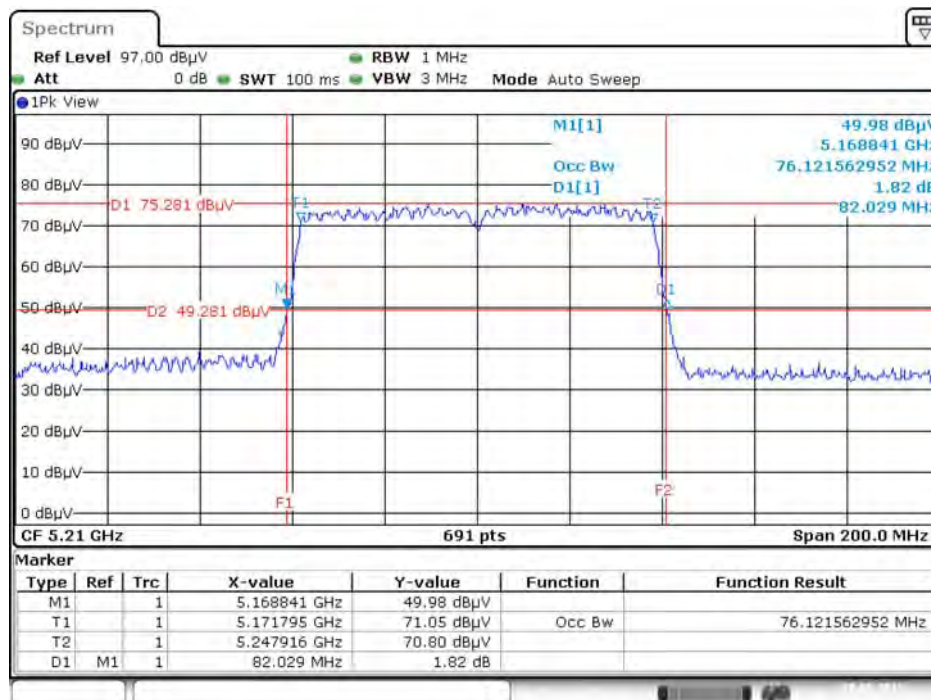


Date: 28.MAY.2015 17:02:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5290 MHz

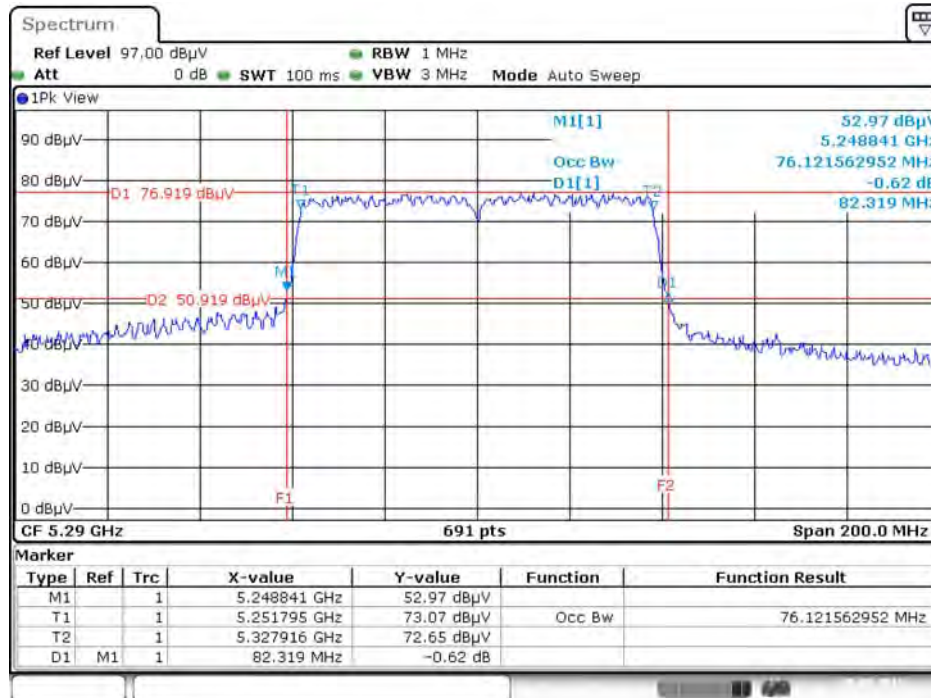

Date: 28.MAY.2015 17:03:49


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5530 MHz

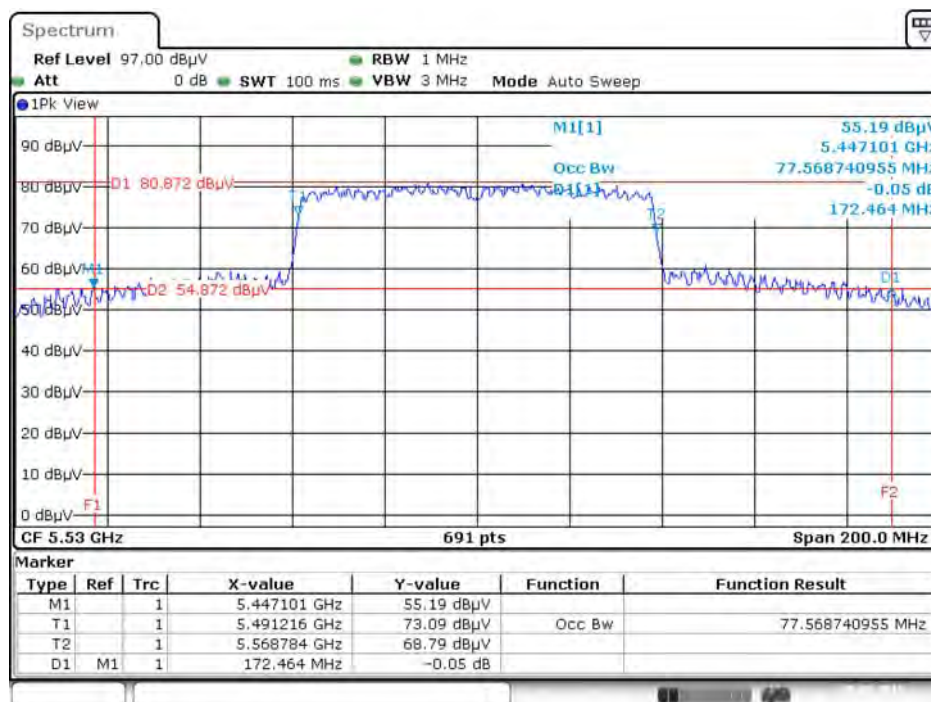

Date: 28.MAY.2015 17:05:35




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5610 MHz

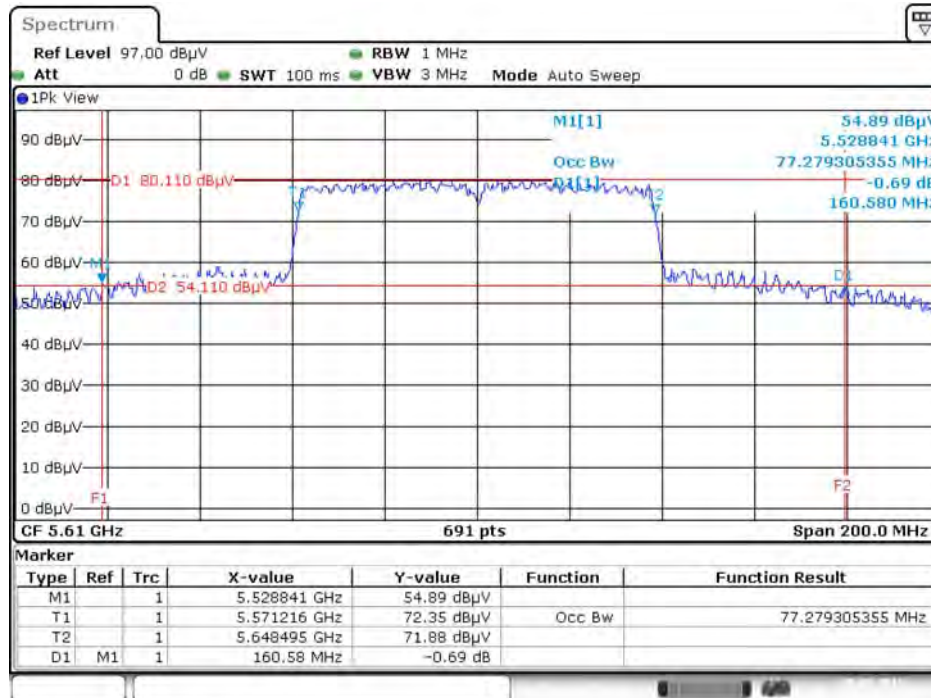

Date: 28.MAY.2015 17:06:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

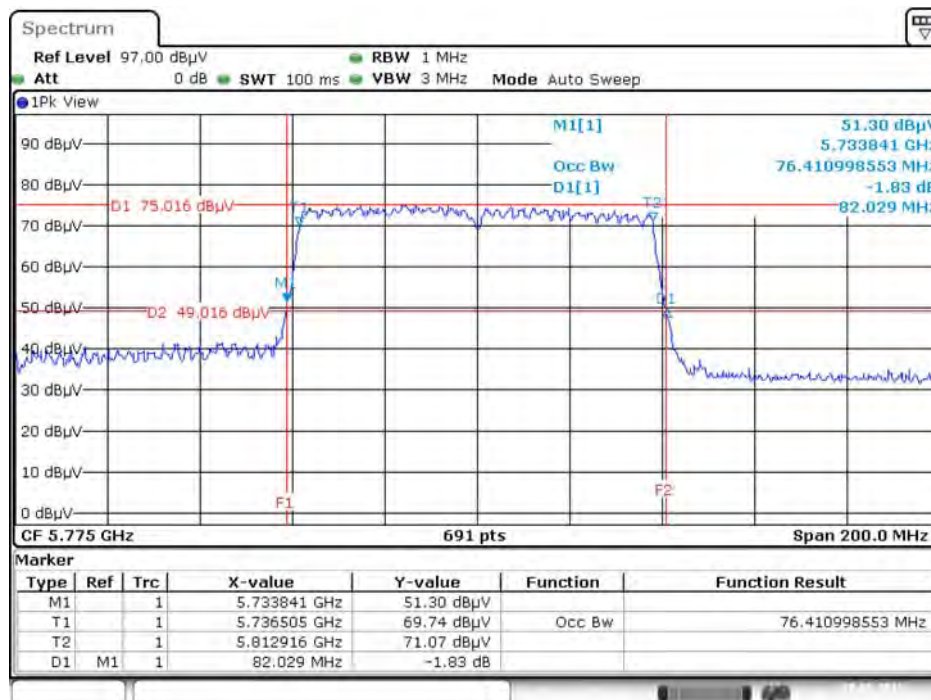

Date: 28.MAY.2015 17:07:06

### 4.3. 6dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 6dB Spectrum Bandwidth


<b>Temperature</b>	20°C	<b>Humidity</b>	46%
<b>Test Engineer</b>	Lucas Huang, Clemens Fang		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	15.07	500	Complies
	5785 MHz	15.01	500	Complies
	5825 MHz	15.01	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	16.06	500	Complies
	5785 MHz	15.71	500	Complies
	5825 MHz	16.06	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	35.83	500	Complies
	5795 MHz	35.83	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	75.65	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

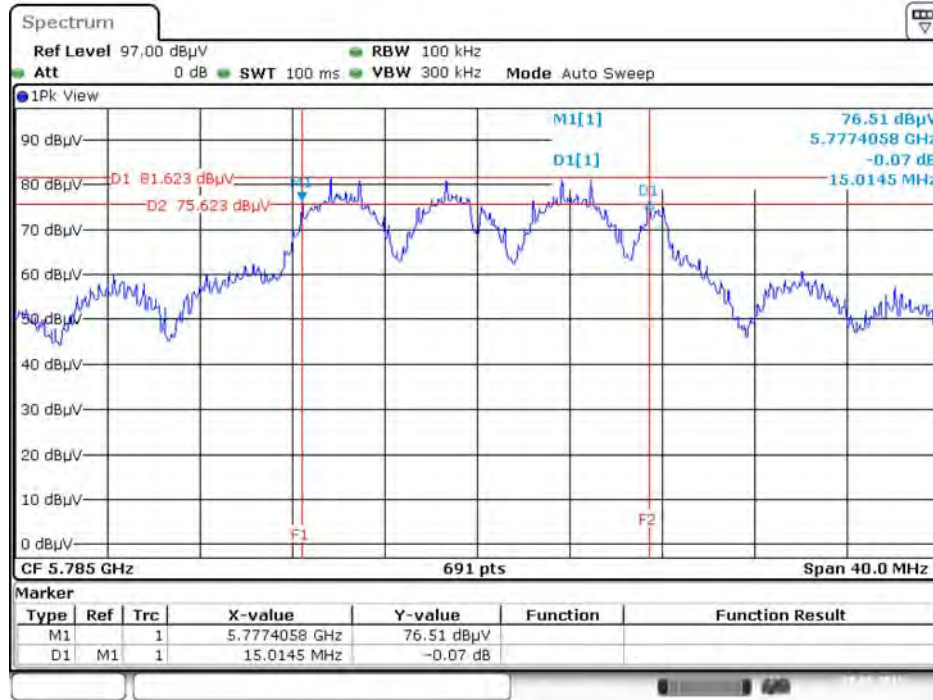

Date: 28.MAY.2015 17:17:27


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

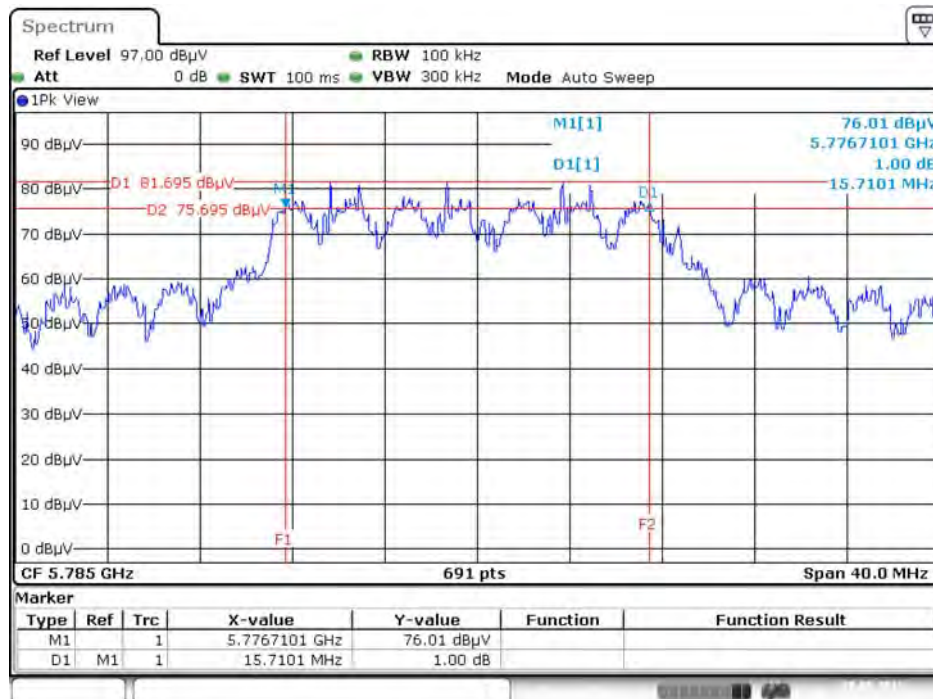


Date: 28.MAY.2015 17:14:35



6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5755MHz

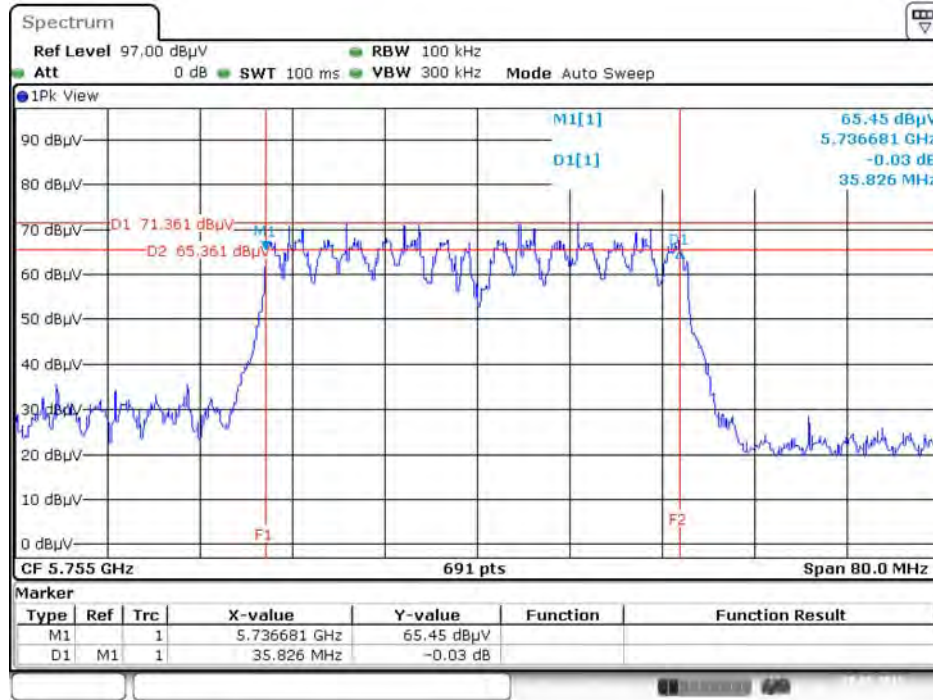

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

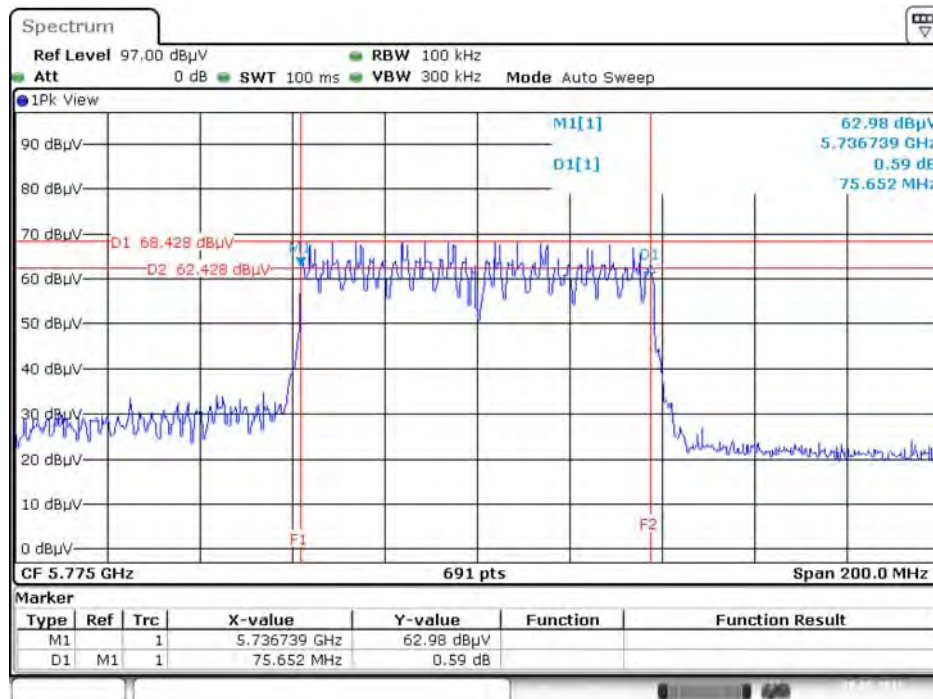

## 4.4. Maximum Conducted Output Power Measurement

### 4.4.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input checked="" type="checkbox"/> Mobile and portable client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

☒	5.25-5.35 GHz	The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☒	5.470-5.725 GHz	
☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

#### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.4.4. Test Setup Layout



#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	46%
Test Engineer	Lucas Huang, Clemens Fang	Test Date	May 28, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11a	5180 MHz	16.35	16.06	19.22	22.35	Complies
	5200 MHz	17.22	17.59	20.42	22.35	Complies
	5240 MHz	17.06	17.21	20.15	22.35	Complies
	5260 MHz	16.11	16.32	19.23	22.35	Complies
	5300 MHz	16.22	16.42	19.33	22.35	Complies
	5320 MHz	15.54	15.91	18.74	22.35	Complies
	5500 MHz	16.04	15.94	19.00	22.35	Complies
	5580 MHz	16.98	15.12	19.16	22.35	Complies
	5700 MHz	15.55	14.94	18.27	22.35	Complies
	5745 MHz	15.71	15.39	18.56	28.35	Complies
	5785 MHz	19.09	17.84	21.52	28.35	Complies
	5825 MHz	17.41	16.62	20.04	28.35	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	14.55	14.78	17.68	22.35	Complies
	5200 MHz	17.29	17.58	20.45	22.35	Complies
	5240 MHz	17.34	17.03	20.20	22.35	Complies
	5260 MHz	16.33	16.24	19.30	22.35	Complies
	5300 MHz	16.21	15.89	19.06	22.35	Complies
	5320 MHz	14.7	15.04	17.88	22.35	Complies
	5500 MHz	15.23	15.01	18.13	22.35	Complies
	5580 MHz	16.78	15.72	19.29	22.35	Complies
	5700 MHz	15.47	14.22	17.90	22.35	Complies
	5745 MHz	14.25	13.88	17.08	28.35	Complies
	5785 MHz	19.02	18.06	21.58	28.35	Complies
	5825 MHz	16.77	15.55	19.21	28.35	Complies

Note 1: Antenna gain = 7.65dBi > 6dBi, So Band 1, 2, 3 Limit =  $24 - (7.65 - 6) = 22.35$  dBm.

Note 2: Antenna gain = 7.65dBi > 6dBi, So Band 4 Limit =  $30 - (7.65 - 6) = 28.35$  dBm.

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11ac MCS0/Nss1 VHT40	5190 MHz	12.15	13.12	15.67	22.35	Complies
	5230 MHz	17.85	18.25	21.06	22.35	Complies
	5270 MHz	15.79	16.46	19.15	22.35	Complies
	5310 MHz	14.22	15.55	17.95	22.35	Complies
	5510 MHz	14.33	13.05	16.75	22.35	Complies
	5550 MHz	16.81	15.34	19.15	22.35	Complies
	5670 MHz	16.83	15.44	19.20	22.35	Complies
	5755 MHz	11.95	11.44	14.71	28.35	Complies
802.11ac MCS0/Nss1 VHT80	5795 MHz	14.30	13.66	17.00	28.35	Complies
	5210 MHz	11.11	11.01	14.07	22.35	Complies
	5290 MHz	13.32	13.48	16.41	22.35	Complies
	5530 MHz	12.36	12.05	15.22	22.35	Complies
	5610 MHz	16.45	16.02	19.25	22.35	Complies
	5775 MHz	11.35	11.01	14.19	28.35	Complies

Note 1: Antenna gain=7.65dBi > 6dBi, So Band 1, 2, 3 Limit =  $24 - (7.65 - 6) = 22.35$  dBm.

Note 2: Antenna gain=7.65dBi > 6dBi, So Band 4 Limit =  $30 - (7.65 - 6) = 28.35$  dBm.

## 4.5. Power Spectral Density Measurement

### 4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input checked="" type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.25-5.35 GHz	11 dBm/MHz
<input checked="" type="checkbox"/>	5.470-5.725 GHz	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

#### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.5.4. Test Setup Layout

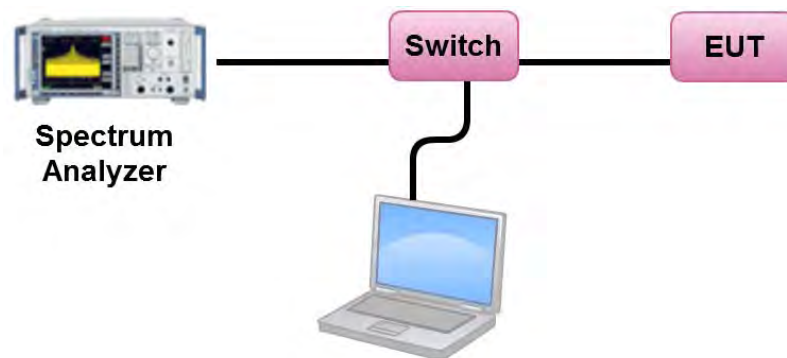

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.5.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	46%
Test Engineer	Lucas Huang, Clemens Fang		

##### Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	6.05	7.46	Complies
40	5200 MHz	7.24	7.46	Complies
48	5240 MHz	6.91	7.46	Complies
52	5260 MHz	6.08	7.46	Complies
60	5300 MHz	6.11	7.46	Complies
64	5320 MHz	5.56	7.46	Complies
100	5500 MHz	5.81	7.46	Complies
116	5580 MHz	5.93	7.46	Complies
140	5700 MHz	5.04	7.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $11 - (9.54 - 6) = 7.46$  dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	5.35	-3.01	2.34	26.46	Complies
157	5785 MHz	8.29	-3.01	5.28	26.46	Complies
165	5825 MHz	6.70	-3.01	3.69	26.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $30 - (9.54 - 6) = 26.46$  dBm/500kHz

## Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.58	7.46	Complies
40	5200 MHz	7.34	7.46	Complies
48	5240 MHz	7.22	7.46	Complies
52	5260 MHz	6.03	7.46	Complies
60	5300 MHz	5.71	7.46	Complies
64	5320 MHz	4.77	7.46	Complies
100	5500 MHz	5.04	7.46	Complies
116	5580 MHz	6.20	7.46	Complies
140	5700 MHz	4.79	7.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65 \text{dBi} > 6 \text{dBi}$ , So Limit =  $11 - (9.54 - 6) = 7.46 \text{ dBm/MHz}$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	4.98	-3.01	1.97	26.46	Complies
157	5785 MHz	8.61	-3.01	5.60	26.46	Complies
165	5825 MHz	6.32	-3.01	3.31	26.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65 \text{dBi} > 6 \text{dBi}$ , So Limit =  $30 - (9.54 - 6) = 26.46 \text{ dBm/500kHz}$

## Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.26	7.46	Complies
46	5230 MHz	4.98	7.46	Complies
54	5270 MHz	2.85	7.46	Complies
62	5310 MHz	0.87	7.46	Complies
102	5510 MHz	0.44	7.46	Complies
110	5550 MHz	3.03	7.46	Complies
134	5670 MHz	2.84	7.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $11 - (9.54 - 6) = 7.46$  dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	-1.06	-3.01	-4.07	26.46	Complies
159	5795 MHz	1.31	-3.01	-1.70	26.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $30 - (9.54 - 6) = 26.46$  dBm/500kHz

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-5.11	7.46	Complies
58	5290 MHz	-2.92	7.46	Complies
106	5530 MHz	-4.56	7.46	Complies
122	5610 MHz	0.64	7.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $11 - (9.54 - 6) = 7.46$  dBm/MHz


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-4.62	-3.01	-7.63	26.46	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.65\text{dBi} > 6\text{dBi}$ , So Limit =  $30 - (9.54 - 6) = 26.46$  dBm/500kHz


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5200 MHz

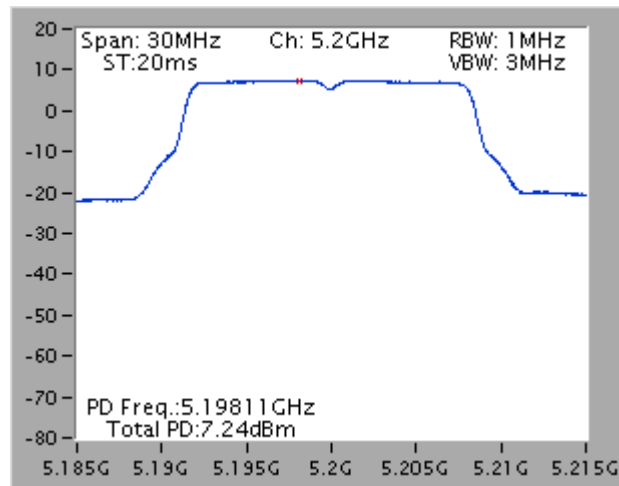


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5300 MHz

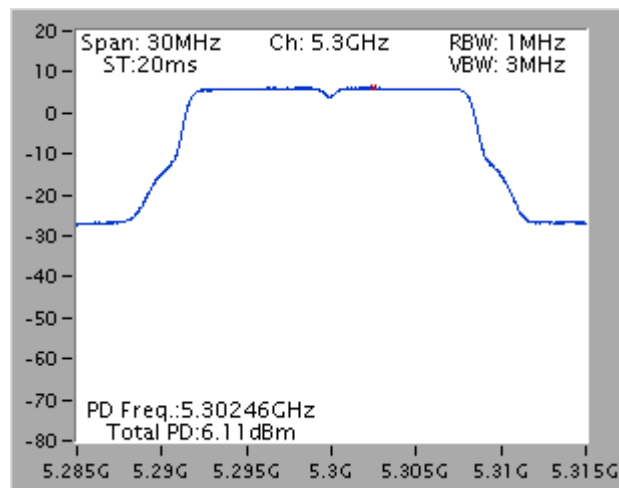


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5580 MHz

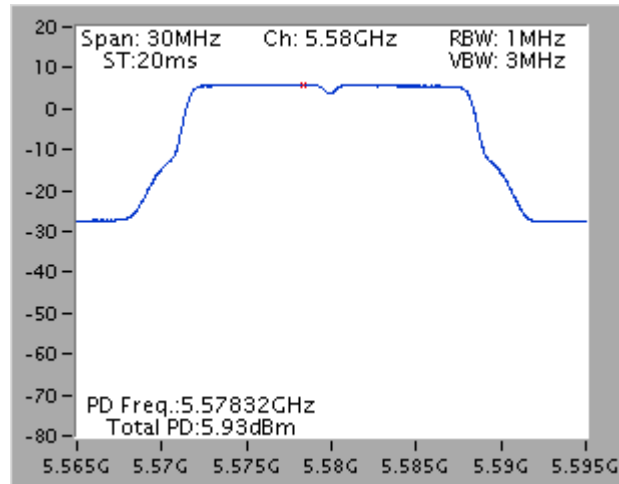


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

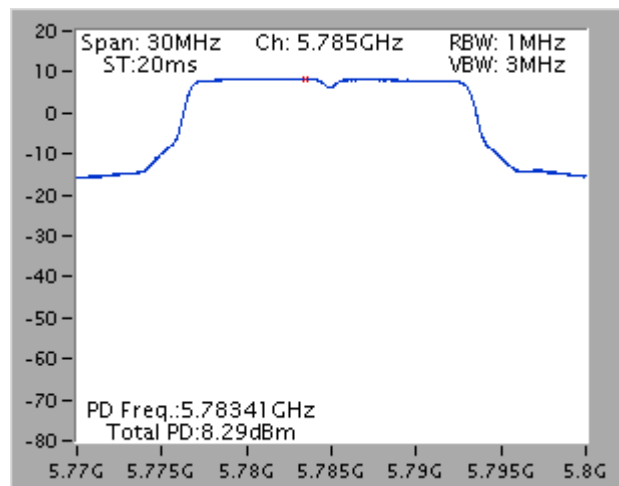

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5200 MHz

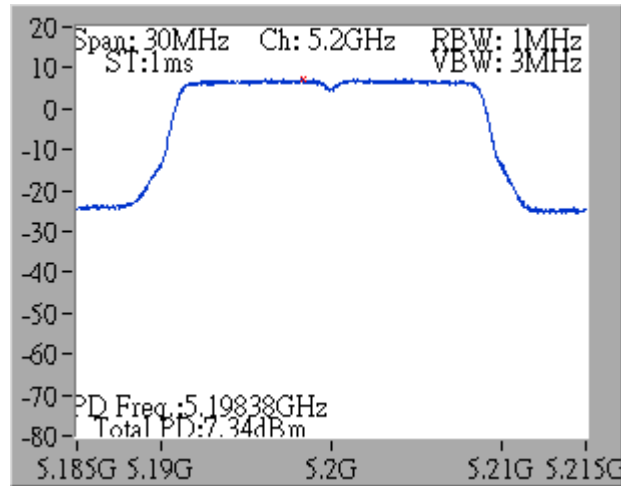


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5260 MHz

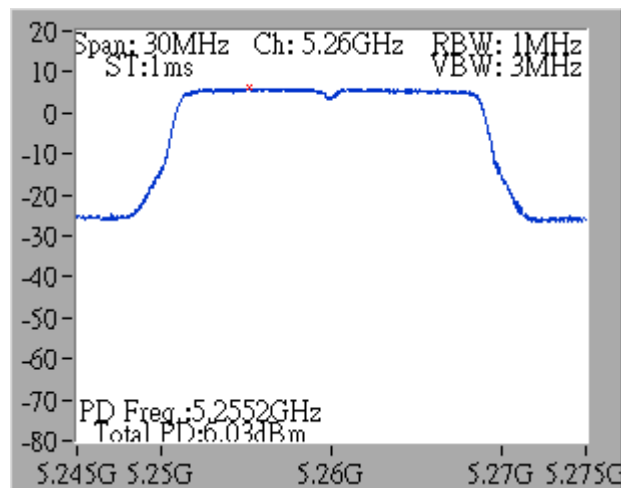





Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5580 MHz

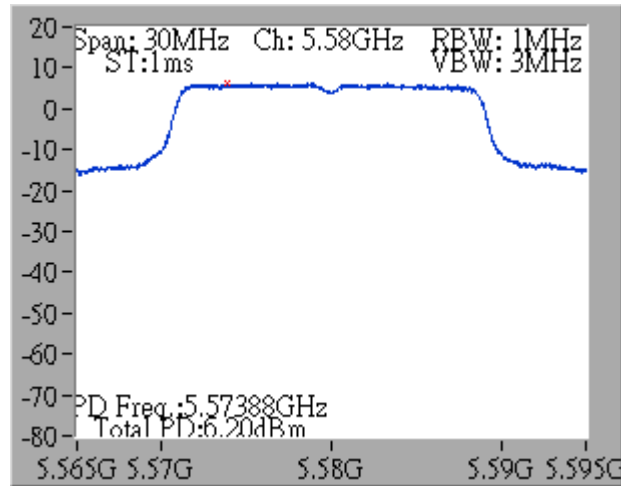


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

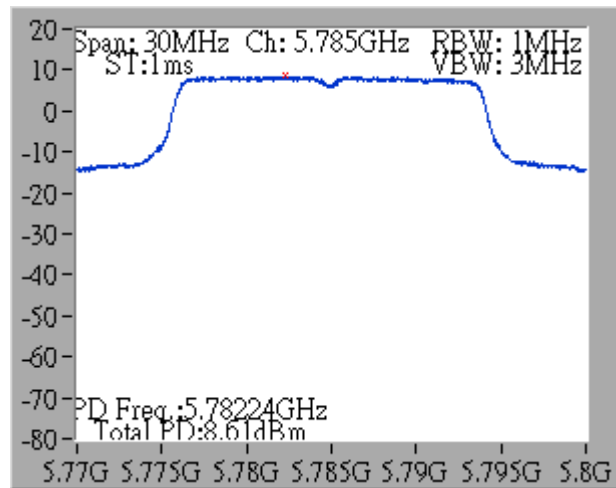


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5230 MHz

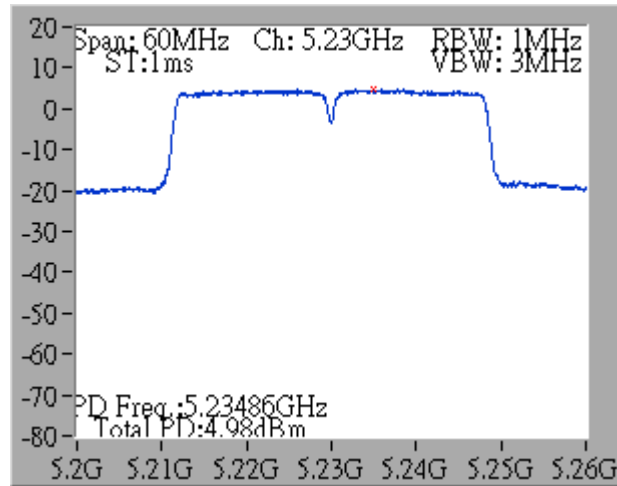


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5270 MHz

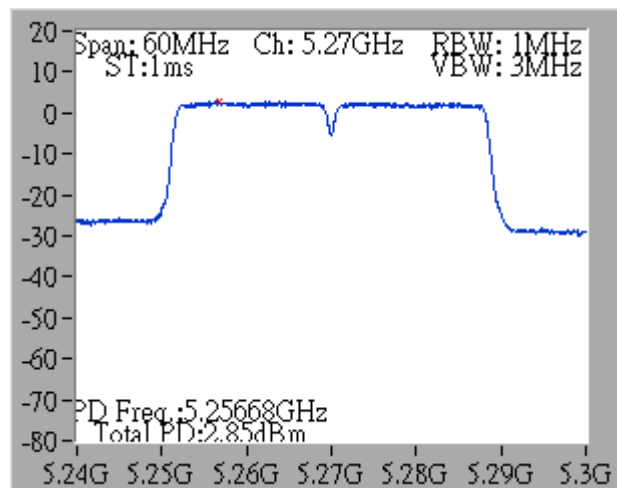


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5550 MHz

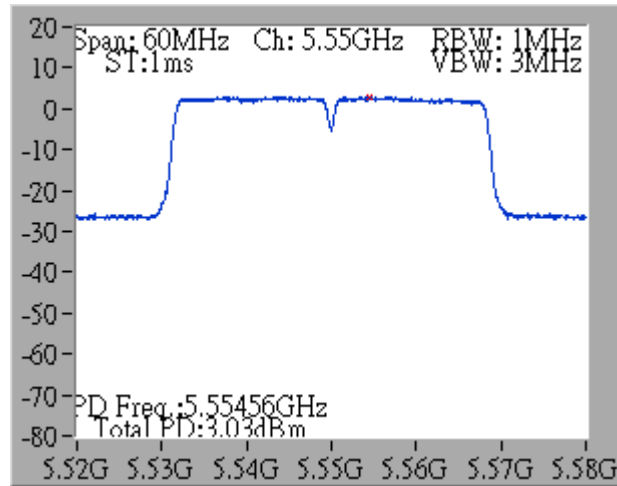


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

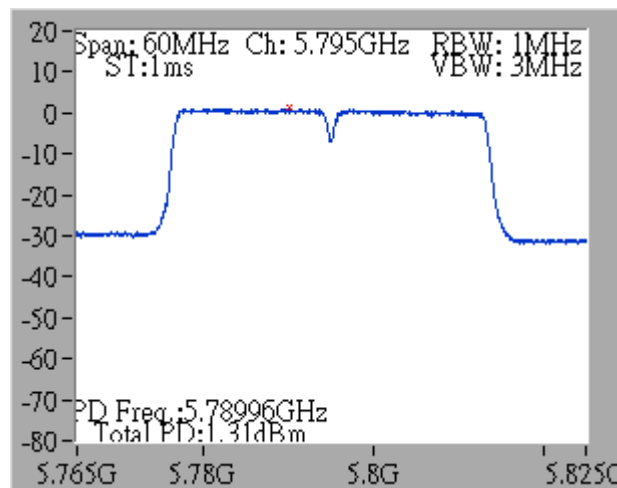


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5210 MHz

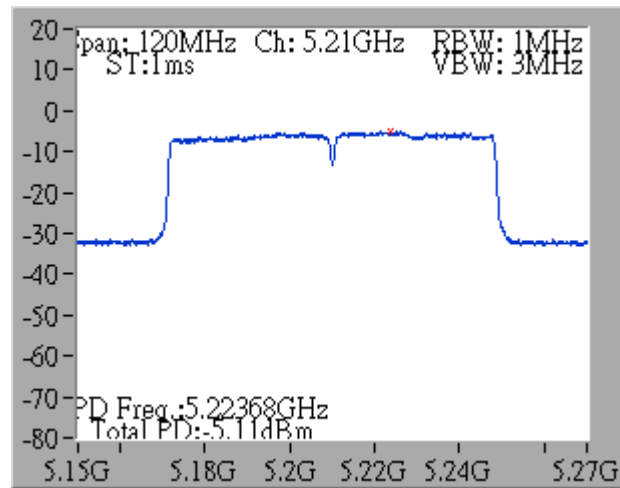


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5290 MHz

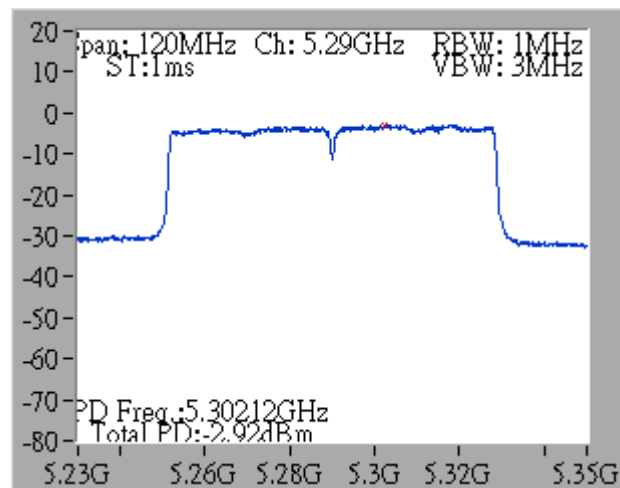


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5530 MHz

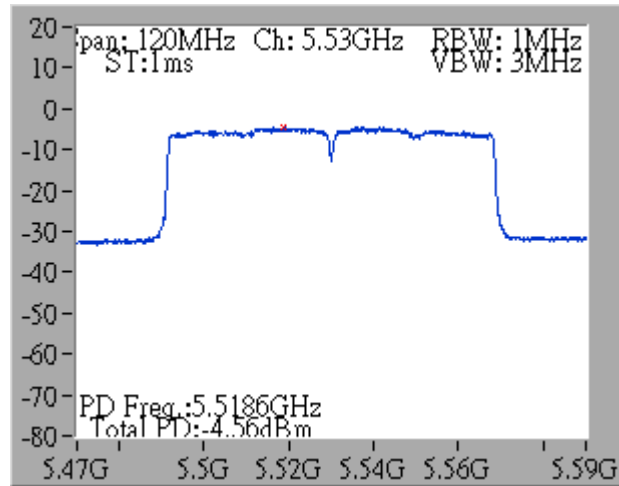

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5610 MHz

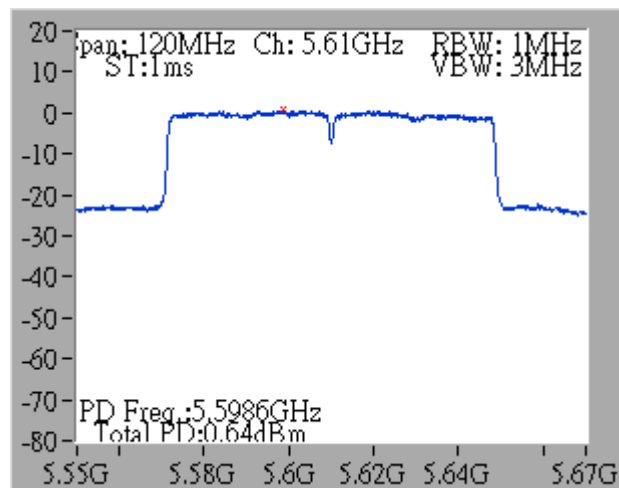

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

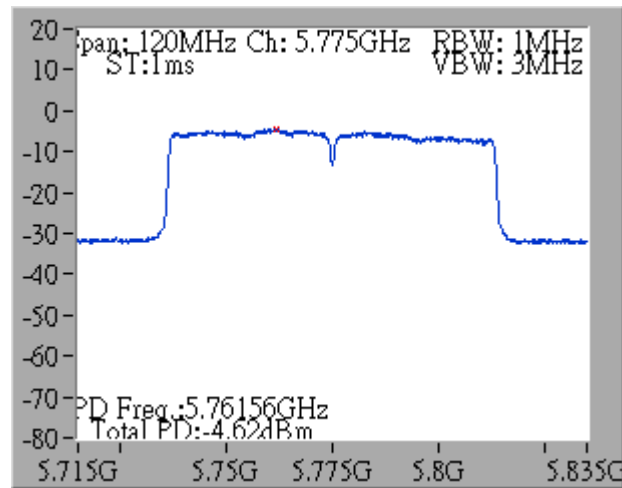



## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

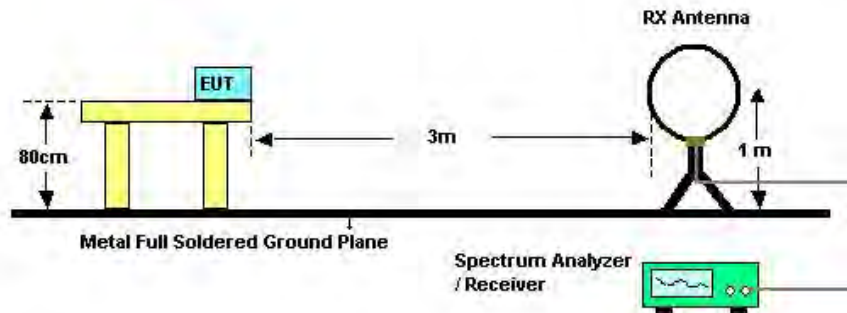

For Radiated Emissions: 30MHz~1GHz

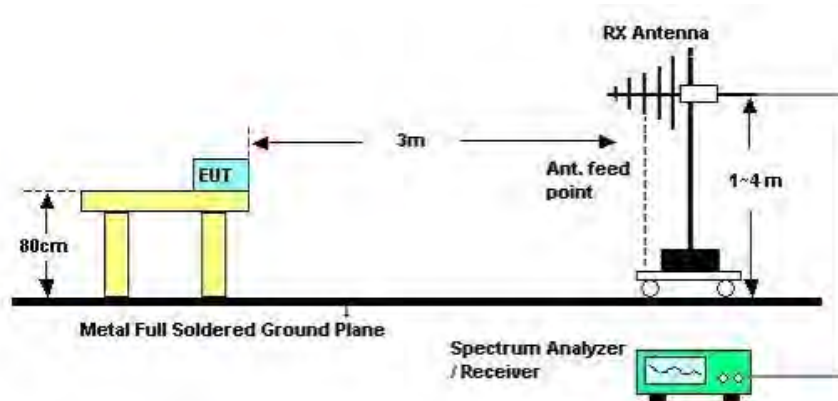

For Radiated Emissions: Above 1GHz

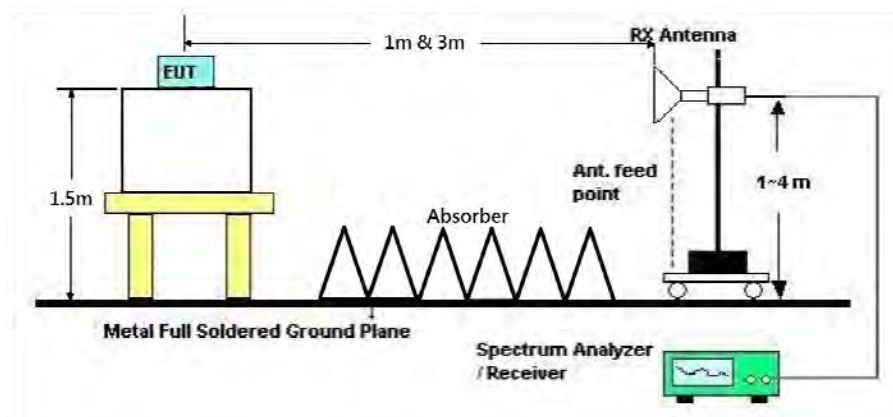

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	Normal Link / Mode 2
<b>Test Date</b>	Jun. 08, 2015		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	Normal Link / Mode 2

Horizontal

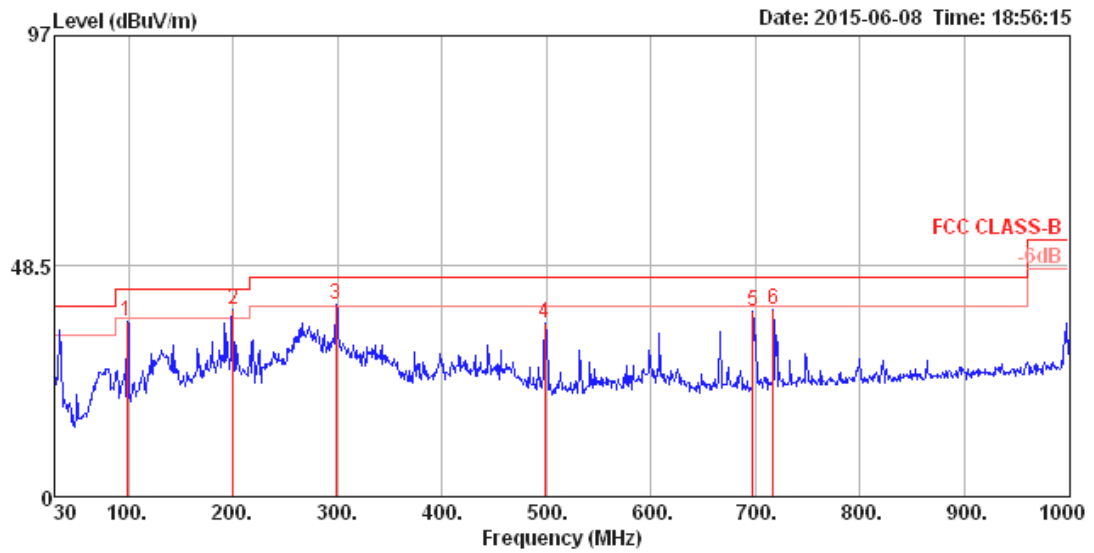

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	98.87	36.86	43.50	-6.64	52.31	1.17	10.17	26.79	200	0	HORIZONTAL Peak
2	199.75	39.43	43.50	-4.07	58.51	1.70	8.75	29.53	150	291	HORIZONTAL Peak
3	298.69	40.47	46.00	-5.53	55.31	2.12	12.98	29.94	125	69	HORIZONTAL Peak
4	498.51	36.40	46.00	-9.60	44.37	2.81	16.90	27.68	150	360	HORIZONTAL Peak
5	697.36	38.86	46.00	-7.14	44.61	3.40	18.89	28.04	100	360	HORIZONTAL Peak
6	716.76	39.27	46.00	-6.73	44.54	3.44	19.23	27.94	150	244	HORIZONTAL Peak

**Vertical**

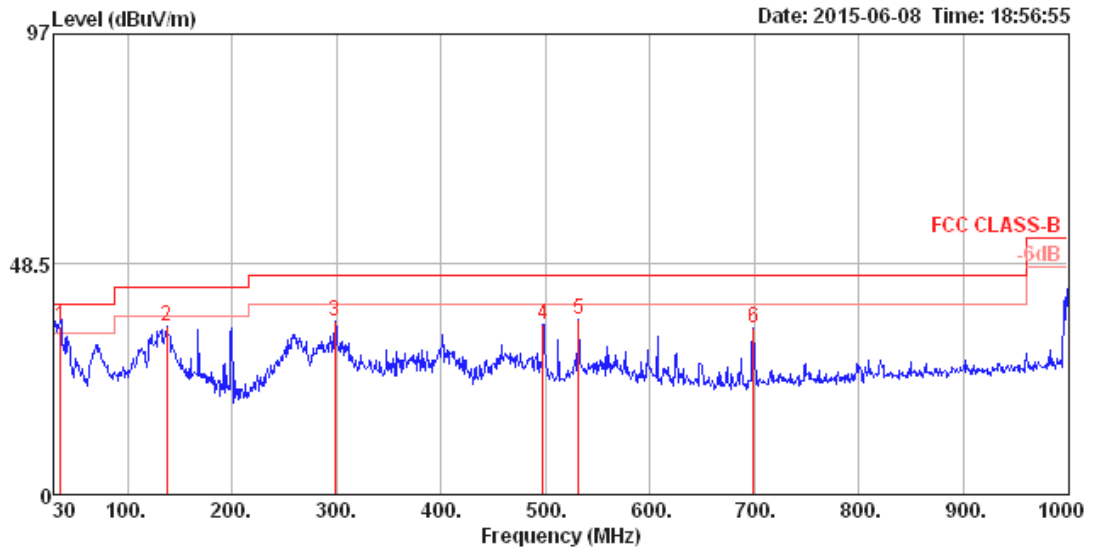

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	35.82	35.36	40.00	-4.64	45.55	0.70	14.62	25.51	125	92 VERTICAL	QP
2	137.67	35.35	43.50	-8.15	50.98	1.39	11.05	28.07	100	113 VERTICAL	Peak
3	298.69	36.58	46.00	-9.42	51.42	2.12	12.98	29.94	125	175 VERTICAL	Peak
4	497.54	35.89	46.00	-10.11	43.88	2.81	16.88	27.68	200	0 VERTICAL	Peak
5	531.49	36.75	46.00	-9.25	44.13	2.89	17.60	27.87	100	279 VERTICAL	Peak
6	699.30	35.09	46.00	-10.91	40.77	3.41	18.94	28.03	150	339 VERTICAL	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 36 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

##### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	15543.33	43.71	54.00	-10.29	32.20	7.56	38.67	34.72	41	200 Average	HORIZONTAL
2	15544.27	56.05	74.00	-17.95	44.55	7.56	38.66	34.72	41	200 Peak	HORIZONTAL

##### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	15543.47	57.74	74.00	-16.26	46.23	7.56	38.67	34.72	316	203 Peak	VERTICAL
2	15543.55	45.27	54.00	-8.73	33.77	7.56	38.66	34.72	316	203 Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 40 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15593.92	57.25	74.00	-16.75	45.82	7.57	38.63	34.77	44	204	Peak	HORIZONTAL
2	15597.83	44.40	54.00	-9.60	32.97	7.58	38.62	34.77	44	204	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15590.59	60.99	74.00	-13.01	49.56	7.57	38.63	34.77	158	198	Peak	VERTICAL
2	15599.71	48.50	54.00	-5.50	37.09	7.58	38.62	34.79	158	198	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 48 / Chain 1 + Chain
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.02	43.36	54.00	-10.64	32.10	7.62	38.52	34.88	199	188	Average	HORIZONTAL
2	15735.22	55.59	74.00	-18.41	44.35	7.63	38.51	34.90	199	188	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15719.13	61.41	74.00	-12.59	50.15	7.62	38.52	34.88	213	188	Peak	VERTICAL
2	15719.77	47.39	54.00	-6.61	36.13	7.62	38.52	34.88	213	188	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15773.81	59.62	74.00	-14.38	48.42	7.64	38.48	34.92	42	198	Peak	HORIZONTAL
2	15778.61	45.50	54.00	-8.50	34.32	7.64	38.48	34.94	42	198	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15779.07	63.99	74.00	-10.01	52.81	7.64	38.48	34.94	163	193	Peak	VERTICAL
2	15779.71	50.27	54.00	-3.73	39.09	7.64	38.48	34.94	163	193	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 60 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10601.68	44.01	54.00	-9.99	34.41	6.21	38.38	34.99	45	175	Average	HORIZONTAL
2	10602.08	56.53	74.00	-17.47	46.93	6.21	38.38	34.99	45	175	Peak	HORIZONTAL
3	15894.15	57.57	74.00	-16.43	46.54	7.68	38.38	35.03	137	196	Peak	HORIZONTAL
4	15899.83	44.71	54.00	-9.29	33.68	7.68	38.38	35.03	137	196	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10601.91	56.82	74.00	-17.18	47.22	6.21	38.38	34.99	324	192	Peak	VERTICAL
2	10602.26	44.14	54.00	-9.86	34.54	6.21	38.38	34.99	324	192	Average	VERTICAL
3	15893.98	64.84	74.00	-9.16	53.81	7.68	38.38	35.03	153	191	Peak	VERTICAL
4	15898.84	50.75	54.00	-3.25	39.72	7.68	38.38	35.03	153	191	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 64 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10636.35	52.27	74.00	-21.73	42.64	6.23	38.37	34.97	228	143	Peak	HORIZONTAL
2	10639.36	39.98	54.00	-14.02	30.35	6.23	38.37	34.97	228	143	Average	HORIZONTAL
3	15959.48	43.72	54.00	-10.28	32.79	7.70	38.33	35.10	218	152	Average	HORIZONTAL
4	15960.46	55.44	74.00	-18.56	44.51	7.70	38.33	35.10	218	152	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10637.68	54.06	74.00	-19.94	44.43	6.23	38.37	34.97	327	177	Peak	VERTICAL
2	10643.13	41.40	54.00	-12.60	31.77	6.23	38.37	34.97	327	177	Average	VERTICAL
3	15953.81	62.18	74.00	-11.82	51.23	7.70	38.33	35.08	159	193	Peak	VERTICAL
4	15958.96	47.36	54.00	-6.64	36.43	7.70	38.33	35.10	159	193	Average	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10998.67	39.87	54.00	-14.13	29.88	6.40	38.30	34.71	129	172	Average	HORIZONTAL
2	10999.02	52.91	74.00	-21.09	42.92	6.40	38.30	34.71	129	172	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10995.72	39.84	54.00	-14.16	29.85	6.40	38.30	34.71	208	155	Average	VERTICAL
2	11018.35	53.06	74.00	-20.94	43.07	6.40	38.30	34.71	208	155	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 116 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11142.52	52.68	74.00	-21.32	42.63	6.44	38.30	34.69	23	181	Peak	HORIZONTAL
2	11162.72	39.98	54.00	-14.02	29.93	6.44	38.30	34.69	23	181	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11159.30	42.12	54.00	-11.88	32.07	6.44	38.30	34.69	170	184	Average	VERTICAL
2	11165.09	54.42	74.00	-19.58	44.37	6.44	38.30	34.69	170	184	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 140 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11383.16	53.91	74.00	-20.09	43.77	6.51	38.30	34.67	169	178	Peak	HORIZONTAL
2	11386.97	40.15	54.00	-13.85	30.01	6.51	38.30	34.67	169	178	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11380.03	40.12	54.00	-13.88	29.98	6.51	38.30	34.67	101	145	Average	VERTICAL
2	11395.66	53.26	74.00	-20.74	43.12	6.51	38.30	34.67	101	145	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 149 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11484.18	53.05	74.00	-20.95	42.88	6.53	38.30	34.66	279	207	Peak	HORIZONTAL
2	11498.71	40.05	54.00	-13.95	29.87	6.54	38.30	34.66	280	207	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11486.04	40.19	54.00	-13.81	30.02	6.53	38.30	34.66	68	196	Average	VERTICAL
2	11489.16	52.84	74.00	-21.16	42.67	6.53	38.30	34.66	68	196	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 157 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11564.99	54.10	74.00	-19.90	43.91	6.55	38.32	34.68	5	192	Peak	HORIZONTAL
2	11569.74	41.49	54.00	-12.51	31.29	6.55	38.33	34.68	5	192	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11564.85	55.83	74.00	-18.17	45.64	6.55	38.32	34.68	196	200	Peak	VERTICAL
2	11569.57	42.28	54.00	-11.72	32.08	6.55	38.33	34.68	196	200	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 165 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11617.90	52.98	74.00	-21.02	42.77	6.56	38.35	34.70	334	200	Peak	HORIZONTAL
2	11619.12	40.19	54.00	-13.81	29.98	6.56	38.35	34.70	334	193	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11615.24	40.29	54.00	-13.71	30.10	6.55	38.34	34.70	329	192	Average	VERTICAL
2	11619.61	53.79	74.00	-20.21	43.58	6.56	38.35	34.70	329	192	Peak	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10360.84	44.10	54.00	-9.90	34.83	6.13	38.32	35.18	39	207	Average	HORIZONTAL
2	10362.92	56.82	74.00	-17.18	47.55	6.13	38.32	35.18	39	207	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10358.29	43.66	54.00	-10.34	34.40	6.13	38.31	35.18	185	205	Average	VERTICAL
2	10358.52	57.70	74.00	-16.30	48.43	6.13	38.32	35.18	185	205	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15591.66	56.51	74.00	-17.49	45.08	7.57	38.63	34.77	52	202	Peak	HORIZONTAL
2	15604.14	44.05	54.00	-9.95	32.64	7.58	38.62	34.79	52	202	Average	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15597.25	48.67	54.00	-5.33	37.24	7.58	38.62	34.77	155	195	Average	VERTICAL
2	15599.68	61.90	74.00	-12.10	50.49	7.58	38.62	34.79	155	195	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15721.62	56.45	74.00	-17.55	45.19	7.62	38.52	34.88	44	200	Peak	HORIZONTAL
2	15724.25	44.33	54.00	-9.67	33.07	7.62	38.52	34.88	44	203	Average	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15722.14	48.85	54.00	-5.15	37.59	7.62	38.52	34.88	155	204	Average	VERTICAL
2	15724.69	61.72	74.00	-12.28	50.46	7.62	38.52	34.88	155	204	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15779.36	45.28	54.00	-8.72	34.10	7.64	38.48	34.94	40	203 Average	HORIZONTAL
2	15781.48	57.98	74.00	-16.02	46.80	7.64	38.48	34.94	40	203 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15782.14	50.60	54.00	-3.40	39.43	7.64	38.47	34.94	155	196 Average	VERTICAL
2	15784.57	64.57	74.00	-9.43	53.40	7.64	38.47	34.94	155	196 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10599.16	43.64	54.00	-10.36	34.05	6.21	38.38	35.00	40	175	Average	HORIZONTAL
2	10601.85	56.88	74.00	-17.12	47.28	6.21	38.38	34.99	40	175	Peak	HORIZONTAL
3	15896.44	45.14	54.00	-8.86	34.11	7.68	38.38	35.03	28	201	Average	HORIZONTAL
4	15898.84	57.86	74.00	-16.14	46.83	7.68	38.38	35.03	28	201	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10596.79	55.85	74.00	-18.15	46.26	6.21	38.38	35.00	326	185	Peak	VERTICAL
2	10598.61	43.26	54.00	-10.74	33.67	6.21	38.38	35.00	326	185	Average	VERTICAL
3	15896.73	49.50	54.00	-4.50	38.47	7.68	38.38	35.03	242	199	Average	VERTICAL
4	15901.50	61.66	74.00	-12.34	50.63	7.69	38.37	35.03	242	199	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10635.98	52.39	74.00	-21.61	42.76	6.23	38.37	34.97	321	204	Peak	HORIZONTAL
2	10640.38	40.79	54.00	-13.21	31.16	6.23	38.37	34.97	320	204	Average	HORIZONTAL
3	15954.10	43.43	54.00	-10.57	32.48	7.70	38.33	35.08	39	200	Average	HORIZONTAL
4	15968.39	56.09	74.00	-17.91	45.16	7.70	38.33	35.10	39	200	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10641.01	41.03	54.00	-12.97	31.40	6.23	38.37	34.97	326	192	Average	VERTICAL
2	10641.48	54.00	74.00	-20.00	44.37	6.23	38.37	34.97	326	192	Peak	VERTICAL
3	15954.38	45.75	54.00	-8.25	34.80	7.70	38.33	35.08	240	202	Average	VERTICAL
4	15963.65	57.98	74.00	-16.02	47.05	7.70	38.33	35.10	240	202	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10998.00	39.87	54.00	-14.13	29.88	6.40	38.30	34.71	168	200	Average	HORIZONTAL
2	11009.87	53.22	74.00	-20.78	43.23	6.40	38.30	34.71	168	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10997.16	39.99	54.00	-14.01	30.00	6.40	38.30	34.71	279	200	Average	VERTICAL
2	11003.39	52.55	74.00	-21.45	42.56	6.40	38.30	34.71	279	200	Peak	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11159.22	40.56	54.00	-13.44	30.51	6.44	38.30	34.69	197	197	Average	HORIZONTAL
2	11167.09	53.37	74.00	-20.63	43.32	6.44	38.30	34.69	197	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11152.07	55.35	74.00	-18.65	45.30	6.44	38.30	34.69	170	193	Peak	VERTICAL
2	11157.08	42.12	54.00	-11.88	32.07	6.44	38.30	34.69	170	193	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11402.34	40.33	54.00	-13.67	30.19	6.51	38.30	34.67	108	200	Average	HORIZONTAL
2	11402.75	52.74	74.00	-21.26	42.60	6.51	38.30	34.67	108	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11394.82	53.44	74.00	-20.56	43.30	6.51	38.30	34.67	300	200	Peak	VERTICAL
2	11396.56	40.36	54.00	-13.64	30.22	6.51	38.30	34.67	300	8995	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11483.55	39.91	54.00	-14.09	29.74	6.53	38.30	34.66	67	200	Average	HORIZONTAL
2	11485.40	53.10	74.00	-20.90	42.93	6.53	38.30	34.66	67	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11492.34	40.07	54.00	-13.93	29.90	6.53	38.30	34.66	261	191	Average	VERTICAL
2	11499.90	52.94	74.00	-21.06	42.76	6.54	38.30	34.66	261	191	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11562.01	53.63	74.00	-20.37	43.44	6.55	38.32	34.68	4	200	Peak	HORIZONTAL
2	11569.86	41.03	54.00	-12.97	30.84	6.55	38.33	34.69	4	200	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11569.86	41.69	54.00	-12.31	31.50	6.55	38.33	34.69	266	205	Average	VERTICAL
2	11569.94	54.32	74.00	-19.68	44.13	6.55	38.33	34.69	266	205	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11643.86	53.07	74.00	-20.93	42.86	6.56	38.36	34.71	140	200	Peak	HORIZONTAL
2	11649.86	40.42	54.00	-13.58	30.22	6.56	38.36	34.72	140	200	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.62	40.78	54.00	-13.22	30.58	6.56	38.36	34.72	272	200	Average	VERTICAL
2	11650.12	53.11	74.00	-20.89	42.91	6.56	38.36	34.72	272	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15564.59	42.41	54.00	-11.59	30.94	7.57	38.64	34.74	83	211	Average	HORIZONTAL
2	15575.12	55.67	74.00	-18.33	44.23	7.57	38.64	34.77	83	211	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15574.80	42.81	54.00	-11.19	31.37	7.57	38.64	34.77	198	200	Average	VERTICAL
2	15575.59	55.06	74.00	-18.94	43.62	7.57	38.64	34.77	198	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15690.78	54.02	74.00	-19.98	42.71	7.61	38.55	34.85	346	174	Peak	HORIZONTAL
2	15690.81	40.10	54.00	-13.90	28.79	7.61	38.55	34.85	346	174	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15690.67	41.19	54.00	-12.81	29.88	7.61	38.55	34.85	203	200	Average	VERTICAL
2	15691.27	55.18	74.00	-18.82	43.87	7.61	38.55	34.85	203	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15808.96	55.75	74.00	-18.25	44.62	7.65	38.45	34.97	251	216	Peak	HORIZONTAL
2	15809.22	43.63	54.00	-10.37	32.50	7.65	38.45	34.97	251	216	Average	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15815.01	60.25	74.00	-13.75	49.12	7.65	38.45	34.97	154	197	Peak	VERTICAL
2	15816.97	47.38	54.00	-6.62	36.25	7.66	38.44	34.97	154	197	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2
<b>Test Date</b>	May 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10611.84	39.48	54.00	-14.52	29.88	6.21	38.38	34.99	136	200	Average	HORIZONTAL
2	10626.80	52.20	74.00	-21.80	42.57	6.22	38.38	34.97	136	200	Peak	HORIZONTAL
3	15920.39	42.81	54.00	-11.19	31.81	7.69	38.36	35.05	275	200	Average	HORIZONTAL
4	15938.19	55.22	74.00	-18.78	44.26	7.70	38.34	35.08	275	200	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10611.46	52.69	74.00	-21.31	43.09	6.21	38.38	34.99	60	200	Peak	VERTICAL
2	10628.89	39.53	54.00	-14.47	29.90	6.22	38.38	34.97	60	200	Average	VERTICAL
3	15927.39	42.77	54.00	-11.23	31.77	7.69	38.36	35.05	144	200	Average	VERTICAL
4	15932.58	55.66	74.00	-18.34	44.69	7.69	38.36	35.08	144	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11010.97	39.56	54.00	-14.44	29.57	6.40	38.30	34.71	307	200	Average	HORIZONTAL
2	11027.35	52.53	74.00	-21.47	42.53	6.41	38.30	34.71	307	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11019.77	39.49	54.00	-14.51	29.50	6.40	38.30	34.71	353	200	Average	VERTICAL
2	11019.88	52.95	74.00	-21.05	42.96	6.40	38.30	34.71	353	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11092.53	52.43	74.00	-21.57	42.40	6.43	38.30	34.70	332	200	Peak	HORIZONTAL
2	11103.04	39.50	54.00	-14.50	29.47	6.43	38.30	34.70	332	200	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11091.26	39.74	54.00	-14.26	29.71	6.43	38.30	34.70	276	200	Average	VERTICAL
2	11108.94	53.06	74.00	-20.94	43.03	6.43	38.30	34.70	276	200	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11332.18	52.70	74.00	-21.30	42.59	6.49	38.30	34.68	151	200	Peak	HORIZONTAL
2	11348.83	39.49	54.00	-14.51	29.36	6.50	38.30	34.67	151	8325	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11334.56	52.71	74.00	-21.29	42.60	6.49	38.30	34.68	120	200	Peak	VERTICAL
2	11335.31	39.55	54.00	-14.45	29.44	6.49	38.30	34.68	120	200	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11515.50	51.65	74.00	-22.35	41.46	6.54	38.31	34.66	179	200	Peak	HORIZONTAL
2	11518.51	39.50	54.00	-14.50	29.31	6.54	38.31	34.66	179	200	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11509.48	53.33	74.00	-20.67	43.15	6.54	38.30	34.66	310	200	Peak	VERTICAL
2	11515.15	39.54	54.00	-14.46	29.35	6.54	38.31	34.66	310	200	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11583.20	39.26	54.00	-14.74	29.07	6.55	38.33	34.69	185	200	Average	HORIZONTAL
2	11584.50	52.20	74.00	-21.80	42.01	6.55	38.33	34.69	185	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11584.18	52.61	74.00	-21.39	42.42	6.55	38.33	34.69	127	200	Peak	VERTICAL
2	11585.95	39.30	54.00	-14.70	29.11	6.55	38.33	34.69	127	200	Average	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15643.46	54.58	74.00	-19.42	43.21	7.59	38.59	34.81	92	200	Peak	HORIZONTAL
2	15679.64	42.09	54.00	-11.91	30.78	7.61	38.55	34.85	92	200	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15636.97	55.19	74.00	-18.81	43.82	7.59	38.59	34.81	264	200	Peak	VERTICAL
2	15637.06	41.95	54.00	-12.05	30.58	7.59	38.59	34.81	264	200	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15869.19	42.56	54.00	-11.44	31.50	7.67	38.40	35.01	206	200	Average	HORIZONTAL
2	15870.03	55.75	74.00	-18.25	44.69	7.67	38.40	35.01	206	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15867.42	55.90	74.00	-18.10	44.84	7.67	38.40	35.01	172	200	Peak	VERTICAL
2	15867.80	42.65	54.00	-11.35	31.59	7.67	38.40	35.01	172	200	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11067.15	39.38	54.00	-14.62	29.36	6.42	38.30	34.70	225	209 Average	HORIZONTAL
2	11067.76	52.78	74.00	-21.22	42.76	6.42	38.30	34.70	228	209 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11065.15	52.66	74.00	-21.34	42.64	6.42	38.30	34.70	115	200 Peak	VERTICAL
2	11068.37	39.53	54.00	-14.47	29.51	6.42	38.30	34.70	115	200 Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11222.50	39.50	54.00	-14.50	29.43	6.46	38.30	34.69	318	200	Average	HORIZONTAL
2	11224.57	52.29	74.00	-21.71	42.22	6.46	38.30	34.69	318	200	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11217.22	52.11	74.00	-21.89	42.04	6.46	38.30	34.69	137	190	Peak	VERTICAL
2	11224.98	39.64	54.00	-14.36	29.57	6.46	38.30	34.69	137	190	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2
<b>Test Date</b>	May 26, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11540.56	52.53	74.00	-21.47	42.35	6.54	38.31	34.67	66	215	Peak	HORIZONTAL
2	11541.32	39.17	54.00	-14.83	28.99	6.54	38.31	34.67	66	215	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11541.84	39.44	54.00	-14.56	29.26	6.54	38.31	34.67	29	200	Average	VERTICAL
2	11552.75	52.60	74.00	-21.40	42.41	6.55	38.32	34.68	29	200	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

##### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.42	70.04	74.00	-3.96	65.50	6.13	33.35	34.94	Peak	218	184	HORIZONTAL
2	5149.86	53.29	54.00	-0.71	48.75	6.13	33.35	34.94	Average	218	184	HORIZONTAL
3	5178.84	98.32			93.73	6.15	33.38	34.94	Average	218	184	HORIZONTAL
4	5184.34	108.96			104.37	6.15	33.38	34.94	Peak	218	184	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	52.66	54.00	-1.34	45.39	6.21	34.11	33.05	177	200	Average	HORIZONTAL
2	5150.00	65.67	74.00	-8.33	58.40	6.21	34.11	33.05	177	200	Peak	HORIZONTAL
3	5198.40	102.64			95.24	6.27	34.18	33.05	177	200	Average	HORIZONTAL
4	5203.60	113.38			105.98	6.27	34.18	33.05	177	200	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	44.32	54.00	-9.68	37.05	6.21	34.11	33.05	202	200	Average	HORIZONTAL
2	5150.00	57.83	74.00	-16.17	50.56	6.21	34.11	33.05	202	200	Peak	HORIZONTAL
3	5237.00	103.35			95.87	6.30	34.23	33.05	202	200	Average	HORIZONTAL
4	5237.00	114.00			106.52	6.30	34.23	33.05	202	200	Peak	HORIZONTAL
5	5350.00	45.24	54.00	-8.76	37.44	6.47	34.39	33.06	202	200	Average	HORIZONTAL
6	5354.20	57.60	74.00	-16.40	49.80	6.47	34.39	33.06	202	200	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	5147.00	57.47	74.00	-16.53	50.20	6.21	34.11	33.05	180	197	Peak	HORIZONTAL
2	5150.00	44.35	54.00	-9.65	37.08	6.21	34.11	33.05	180	197	Average	HORIZONTAL
3	5258.20	103.87			96.34	6.34	34.25	33.06	180	197	Average	HORIZONTAL
4	5263.60	115.40			107.85	6.34	34.27	33.06	180	197	Peak	HORIZONTAL
5	5350.00	45.87	54.00	-8.13	38.07	6.47	34.39	33.06	180	197	Average	HORIZONTAL
6	5353.60	58.52	74.00	-15.48	50.72	6.47	34.39	33.06	180	197	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

### Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	5296.40	101.99			94.36	6.37	34.32	33.06	201	203	Average	HORIZONTAL
2	5306.60	112.78			105.12	6.40	34.32	33.06	201	203	Peak	HORIZONTAL
3	5350.60	68.36	74.00	-5.64	60.56	6.47	34.39	33.06	201	203	Peak	HORIZONTAL
4	5351.80	53.82	54.00	-0.18	46.02	6.47	34.39	33.06	201	203	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

### Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5315.66	109.77	74.00			6.24	33.52	34.94	Peak	216	200	HORIZONTAL
2	5316.09	98.80	54.00			6.24	33.52	34.94	Average	216	200	HORIZONTAL
3	5350.29	53.41	54.00	-0.59	48.54	6.26	33.55	34.94	Average	216	200	HORIZONTAL
4	5351.59	71.38	74.00	-2.62	66.51	6.26	33.55	34.94	Peak	216	200	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 100, 116, 140 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 23, 2015		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5455.95	62.88	74.00	-11.12	57.83	6.33	33.65	34.93	Peak	210	202	HORIZONTAL
2	5460.00	49.08	54.00	-4.92	44.03	6.33	33.65	34.93	Average	210	202	HORIZONTAL
3	5467.40	69.38	74.00	-4.62	64.30	6.34	33.67	34.93	Peak	210	202	HORIZONTAL
4	5470.00	52.46	54.00	-1.54	47.38	6.34	33.67	34.93	Average	210	202	HORIZONTAL
5	5501.74	100.25			95.13	6.36	33.70	34.94	Average	210	202	HORIZONTAL
6	5506.95	110.98			105.86	6.36	33.70	34.94	Peak	210	202	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5457.00	45.67	54.00	-8.33	37.60	6.60	34.53	33.06	175	195	Average	HORIZONTAL
2	5458.20	58.68	74.00	-15.32	50.61	6.60	34.53	33.06	175	195	Peak	HORIZONTAL
3	5465.80	58.66	74.00	-15.34	50.57	6.60	34.55	33.06	175	195	Peak	HORIZONTAL
4	5466.40	45.90	54.00	-8.10	37.81	6.60	34.55	33.06	175	195	Average	HORIZONTAL
5	5583.00	102.49			94.23	6.72	34.63	33.09	175	195	Average	HORIZONTAL
6	5583.00	114.32			106.06	6.72	34.63	33.09	175	195	Peak	HORIZONTAL
7	5725.00	45.33	54.00	-8.67	36.94	6.83	34.69	33.13	175	195	Average	HORIZONTAL
8	5725.60	57.41	74.00	-16.59	49.02	6.83	34.69	33.13	175	195	Peak	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5695.95	109.65			104.22	6.43	33.97	34.97	Peak	206	198	HORIZONTAL
2	5696.24	99.08			93.65	6.43	33.97	34.97	Average	206	198	HORIZONTAL
3	5725.14	51.23	54.00	-2.77	45.75	6.45	34.01	34.98	Average	206	198	HORIZONTAL
4	5726.59	68.76	74.00	-5.24	63.28	6.45	34.01	34.98	Peak	206	198	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 23, 2015		

**Channel 149**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5714.86	68.17	68.20	-0.03	62.72	6.44	33.99	34.98	Peak	208	197	HORIZONTAL
2	5722.83	72.57	78.20	-5.63	67.09	6.45	34.01	34.98	Peak	208	197	HORIZONTAL
3	5740.80	109.94			104.44	6.45	34.04	34.99	Peak	208	197	HORIZONTAL
4	5751.37	99.57			94.07	6.45	34.04	34.99	Average	208	197	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5711.40	61.45	68.20	-6.75	53.07	6.83	34.68	33.13	166	209	Peak	HORIZONTAL
2	5724.20	65.97	78.20	-12.23	57.58	6.83	34.69	33.13	166	209	Peak	HORIZONTAL
3	5781.00	114.16			105.72	6.88	34.71	33.15	166	209	Peak	HORIZONTAL
4	5781.40	103.23			94.78	6.90	34.71	33.16	166	209	Average	HORIZONTAL
5	5850.40	61.29	78.20	-16.91	52.77	6.95	34.74	33.17	166	209	Peak	HORIZONTAL
6	5861.60	60.58	68.20	-7.62	52.05	6.97	34.74	33.18	166	209	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5826.20	102.41			93.92	6.92	34.73	33.16	194	198	Average	HORIZONTAL
2	5826.20	113.08			104.59	6.92	34.73	33.16	194	198	Peak	HORIZONTAL
3	5850.00	76.47	78.20	-1.73	67.95	6.95	34.74	33.17	194	198	Peak	HORIZONTAL
4	5860.80	67.95	68.20	-0.25	59.42	6.97	34.74	33.18	194	198	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 36**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.40	68.98	74.00	-5.02	64.44	6.13	33.35	34.94	Peak	225	196	HORIZONTAL
2	5150.00	52.26	54.00	-1.74	47.72	6.13	33.35	34.94	Average	225	196	HORIZONTAL
3	5175.66	109.91			105.32	6.15	33.38	34.94	Peak	225	196	HORIZONTAL
4	5177.83	99.67			95.08	6.15	33.38	34.94	Average	225	196	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	5150.00	53.90	54.00	-0.10	46.63	6.21	34.11	33.05	190	185	Average	HORIZONTAL
2	5150.00	67.84	74.00	-6.16	60.57	6.21	34.11	33.05	190	185	Peak	HORIZONTAL
3	5197.20	102.64			95.24	6.27	34.18	33.05	190	185	Average	HORIZONTAL
4	5202.40	112.61			105.21	6.27	34.18	33.05	190	185	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	5136.80	56.80	74.00	-17.20	49.59	6.17	34.09	33.05	187	206	Peak	HORIZONTAL
2	5150.00	44.32	54.00	-9.68	37.05	6.21	34.11	33.05	187	206	Average	HORIZONTAL
3	5241.80	112.94			105.44	6.30	34.25	33.05	187	206	Peak	HORIZONTAL
4	5242.40	102.24			94.74	6.30	34.25	33.05	187	206	Average	HORIZONTAL
5	5350.00	45.16	54.00	-8.84	37.36	6.47	34.39	33.06	187	206	Average	HORIZONTAL
6	5356.00	57.49	74.00	-16.51	49.69	6.47	34.39	33.06	187	206	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 52**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5143.40	56.08	74.00	-17.92	48.85	6.17	34.11	33.05	190	204	Peak	HORIZONTAL
2	5150.00	44.15	54.00	-9.85	36.88	6.21	34.11	33.05	190	204	Average	HORIZONTAL
3	5262.40	102.43			94.88	6.34	34.27	33.06	190	204	Average	HORIZONTAL
4	5263.00	113.31			105.76	6.34	34.27	33.06	190	204	Peak	HORIZONTAL
5	5350.00	45.76	54.00	-8.24	37.96	6.47	34.39	33.06	190	204	Average	HORIZONTAL
6	5361.40	58.29	74.00	-15.71	50.47	6.47	34.41	33.06	190	204	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5260 MHz.

**Channel 60**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5303.60	112.99			105.33	6.40	34.32	33.06	178	197	Peak	HORIZONTAL
2	5306.40	102.67			95.01	6.40	34.32	33.06	178	197	Average	HORIZONTAL
3	5350.80	53.82	54.00	-0.18	46.02	6.47	34.39	33.06	178	197	Average	HORIZONTAL
4	5354.40	69.12	74.00	-4.88	61.32	6.47	34.39	33.06	178	197	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

**Channel 64**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5317.54	99.87			95.05	6.24	33.52	34.94	Average	213	195	HORIZONTAL
2	5317.97	109.42			104.60	6.24	33.52	34.94	Peak	213	195	HORIZONTAL
3	5350.00	68.15	74.00	-5.85	63.28	6.26	33.55	34.94	Peak	213	195	HORIZONTAL
4	5350.14	53.05	54.00	-0.95	48.18	6.26	33.55	34.94	Average	213	195	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 100**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	49.50	54.00	-4.50	44.45	6.33	33.65	34.93	Average	221	200	HORIZONTAL
2	5460.00	64.70	74.00	-9.30	59.65	6.33	33.65	34.93	Peak	221	200	HORIZONTAL
3	5468.26	70.71	74.00	-3.29	65.63	6.34	33.67	34.93	Peak	221	200	HORIZONTAL
4	5470.00	53.90	54.00	-0.10	48.82	6.34	33.67	34.93	Average	221	200	HORIZONTAL
5	5493.05	99.33			94.23	6.35	33.68	34.93	Average	221	200	HORIZONTAL
6	5495.66	109.92			104.82	6.35	33.68	34.93	Peak	221	200	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

**Channel 116**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5455.80	58.38	74.00	-15.62	50.31	6.60	34.53	33.06	184	207	Peak	HORIZONTAL
2	5460.00	45.48	54.00	-8.52	37.41	6.60	34.53	33.06	184	207	Average	HORIZONTAL
3	5468.80	58.46	74.00	-15.54	50.37	6.60	34.55	33.06	184	207	Peak	HORIZONTAL
4	5470.00	45.55	54.00	-8.45	37.46	6.60	34.55	33.06	184	207	Average	HORIZONTAL
5	5582.40	113.71			105.45	6.72	34.63	33.09	184	207	Peak	HORIZONTAL
6	5584.80	103.20			94.94	6.72	34.63	33.09	184	207	Average	HORIZONTAL
7	5725.00	45.05	54.00	-8.95	36.66	6.83	34.69	33.13	184	207	Average	HORIZONTAL
8	5725.60	57.42	74.00	-16.58	49.03	6.83	34.69	33.13	184	207	Peak	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5580 MHz.

**Channel 140**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5695.22	99.77			94.34	6.43	33.97	34.97	Average	226	196	HORIZONTAL
2	5695.66	110.04			104.61	6.43	33.97	34.97	Peak	226	196	HORIZONTAL
3	5725.00	69.05	74.00	-4.95	63.57	6.45	34.01	34.98	Peak	226	196	HORIZONTAL
4	5725.14	53.88	54.00	-0.12	48.40	6.45	34.01	34.98	Average	226	196	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

### Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5712.54	68.07	68.20	-0.13	62.62	6.44	33.99	34.98	Peak	210	192	HORIZONTAL
2	5724.71	74.25	78.20	-3.95	68.77	6.45	34.01	34.98	Peak	210	192	HORIZONTAL
3	5737.62	99.30			93.80	6.45	34.04	34.99	Average	210	192	HORIZONTAL
4	5742.54	109.15			103.65	6.45	34.04	34.99	Peak	210	192	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

### Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5715.00	64.60	68.20	-3.60	56.22	6.83	34.68	33.13	191	201	Peak	HORIZONTAL
2	5724.60	68.14	78.20	-10.06	59.75	6.83	34.69	33.13	191	201	Peak	HORIZONTAL
3	5777.40	113.06			104.62	6.88	34.71	33.15	191	201	Peak	HORIZONTAL
4	5780.20	102.47			94.03	6.88	34.71	33.15	191	201	Average	HORIZONTAL
5	5850.00	60.41	78.20	-17.79	51.89	6.95	34.74	33.17	191	201	Peak	HORIZONTAL
6	5860.00	60.89	68.20	-7.31	52.36	6.97	34.74	33.18	191	201	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

### Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5820.20	101.05			92.56	6.92	34.73	33.16	190	201	Average	HORIZONTAL
2	5823.00	114.87			106.38	6.92	34.73	33.16	190	201	Peak	HORIZONTAL
3	5850.00	73.21	78.20	-4.99	64.69	6.95	34.74	33.17	190	201	Peak	HORIZONTAL
4	5860.00	68.18	68.20	-0.02	59.65	6.97	34.74	33.18	190	201	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 38**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.40	67.76	74.00	-6.24	63.22	6.13	33.35	34.94	Peak	218	192	HORIZONTAL
2	5149.71	53.93	54.00	-0.07	49.39	6.13	33.35	34.94	Average	218	192	HORIZONTAL
3	5175.53	104.51			99.92	6.15	33.38	34.94	Peak	218	192	HORIZONTAL
4	5182.76	94.69			90.10	6.15	33.38	34.94	Average	218	192	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm			
1	5146.40	65.68	74.00	-8.32	58.41	6.21	34.11	33.05	184	215	Peak	HORIZONTAL
2	5150.00	53.58	54.00	-0.42	46.31	6.21	34.11	33.05	184	215	Average	HORIZONTAL
3	5222.20	109.64			102.19	6.30	34.20	33.05	184	215	Peak	HORIZONTAL
4	5227.00	99.97			92.49	6.30	34.23	33.05	184	215	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

#### Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5263.40	100.50			92.95	6.34	34.27	33.06	174	209 Average	HORIZONTAL
2	5264.00	109.77			102.22	6.34	34.27	33.06	174	209 Peak	HORIZONTAL
3	5351.20	53.81	54.00	-0.19	46.01	6.47	34.39	33.06	174	209 Average	HORIZONTAL
4	5353.00	65.35	74.00	-8.65	57.55	6.47	34.39	33.06	174	209 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

#### Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5312.32	105.72			100.90	6.24	33.52	34.94 Peak	219	193	HORIZONTAL
2	5314.92	96.13			91.31	6.24	33.52	34.94 Average	219	193	HORIZONTAL
3	5350.00	52.96	54.00	-1.04	48.09	6.26	33.55	34.94 Average	219	193	HORIZONTAL
4	5350.58	65.37	74.00	-8.63	60.50	6.26	33.55	34.94 Peak	219	193	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

#### Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	49.03	54.00	-4.97	43.98	6.33	33.65	34.93	Average	221	188	HORIZONTAL
2	5460.00	63.98	74.00	-10.02	58.93	6.33	33.65	34.93	Peak	221	188	HORIZONTAL
3	5466.82	68.05	68.20	-0.15	62.97	6.34	33.67	34.93	Peak	221	188	HORIZONTAL
4	5497.26	104.63			99.50	6.36	33.70	34.93	Peak	221	188	HORIZONTAL
5	5519.55	94.82			89.67	6.37	33.72	34.94	Average	221	188	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5510 MHz.

#### Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5458.80	51.97	54.00	-2.03	43.90	6.60	34.53	33.06	183	212	Average	HORIZONTAL
2	5459.40	67.41	74.00	-6.59	59.34	6.60	34.53	33.06	183	212	Peak	HORIZONTAL
3	5468.80	68.02	68.20	-0.18	59.93	6.60	34.55	33.06	183	212	Peak	HORIZONTAL
4	5536.80	99.83			91.62	6.68	34.61	33.08	183	212	Average	HORIZONTAL
5	5544.60	111.19			102.98	6.68	34.61	33.08	183	212	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5550 MHz.

#### Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5684.40	96.90			88.53	6.81	34.68	33.12	271	179	Average	VERTICAL
2	5684.40	107.48			99.11	6.81	34.68	33.12	271	179	Peak	VERTICAL
3	5732.20	74.19	68.20	5.99	65.78	6.86	34.69	33.14	271	179	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 151**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5710.37	66.78	68.20	-1.42	61.33	6.44	33.99	34.98	Peak	198	193	HORIZONTAL
2	5715.29	68.95	78.20	-9.25	63.50	6.44	33.99	34.98	Peak	198	193	HORIZONTAL
3	5750.08	94.34			88.84	6.45	34.04	34.99	Average	198	193	HORIZONTAL
4	5750.08	104.13			98.63	6.45	34.04	34.99	Peak	198	193	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

**Channel 159**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5713.20	66.72	68.20	-1.48	58.34	6.83	34.68	33.13	172	205	Peak	HORIZONTAL
2	5723.20	70.08	78.20	-8.12	61.69	6.83	34.69	33.13	172	205	Peak	HORIZONTAL
3	5783.00	109.82			101.37	6.90	34.71	33.16	172	205	Peak	HORIZONTAL
4	5788.40	99.91			91.45	6.90	34.72	33.16	172	205	Average	HORIZONTAL
5	5853.60	71.13	78.20	-7.07	62.61	6.95	34.74	33.17	172	205	Peak	HORIZONTAL
6	5861.20	67.75	68.20	-0.45	59.22	6.97	34.74	33.18	172	205	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 58 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015		

**Channel 42**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5144.00	66.08	74.00	-7.92	58.81	6.21	34.11	33.05	184	204 Peak	HORIZONTAL
2	5149.00	53.98	54.00	-0.02	46.71	6.21	34.11	33.05	184	204 Average	HORIZONTAL
3	5195.00	100.09			92.69	6.27	34.18	33.05	184	204 Peak	HORIZONTAL
4	5197.00	90.46			83.06	6.27	34.18	33.05	184	204 Average	HORIZONTAL
5	5356.00	46.42	54.00	-7.58	38.62	6.47	34.39	33.06	184	204 Average	HORIZONTAL
6	5387.00	59.03	74.00	-14.97	51.15	6.50	34.44	33.06	184	204 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

**Channel 58**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.66	59.02	74.00	-14.98	54.48	6.13	33.35	34.94 Peak	216	190	HORIZONTAL
2	5149.28	47.38	54.00	-6.62	42.84	6.13	33.35	34.94 Average	216	190	HORIZONTAL
3	5302.30	101.08			96.29	6.23	33.50	34.94 Peak	216	190	HORIZONTAL
4	5304.47	92.16			87.37	6.23	33.50	34.94 Average	216	190	HORIZONTAL
5	5350.00	52.79	54.00	-1.21	47.92	6.26	33.55	34.94 Average	216	190	HORIZONTAL
6	5350.00	66.00	74.00	-8.00	61.13	6.26	33.55	34.94 Peak	216	190	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5290 MHz.





<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106, 122, 155 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 24, 2015		

**Channel 106**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5454.21	53.12	54.00	-0.88	48.07	6.33	33.65	34.93	Average	221	184	HORIZONTAL
2	5454.21	65.37	74.00	-8.63	60.32	6.33	33.65	34.93	Peak	221	184	HORIZONTAL
3	5470.00	66.53	68.20	-1.67	61.45	6.34	33.67	34.93	Peak	221	184	HORIZONTAL
4	5519.15	91.36			86.21	6.37	33.72	34.94	Average	221	184	HORIZONTAL
5	5726.45	59.93	68.20	-8.27	54.45	6.45	34.01	34.98	Peak	221	184	HORIZONTAL

Item 4 are the fundamental frequency at 5530 MHz.

**Channel 122**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5712.83	66.70	68.20	-1.50	61.25	6.44	33.99	34.98	Peak	221	194	HORIZONTAL
2	5722.83	67.76	78.20	-10.44	62.28	6.45	34.01	34.98	Peak	221	194	HORIZONTAL
3	5758.36	101.02			95.49	6.46	34.06	34.99	Peak	221	194	HORIZONTAL
4	5762.70	90.79			85.26	6.46	34.06	34.99	Average	221	194	HORIZONTAL
5	5850.00	60.57	78.20	-17.63	54.91	6.49	34.18	35.01	Peak	221	194	HORIZONTAL
6	5867.96	60.97	68.20	-7.23	55.27	6.50	34.21	35.01	Peak	221	194	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5610 MHz.

**Channel 155**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5458.00	65.45	74.00	-8.55	57.38	6.60	34.53	33.06	185	192	Peak	HORIZONTAL
2	5460.00	53.06	54.00	-0.94	44.99	6.60	34.53	33.06	185	192	Average	HORIZONTAL
3	5469.00	68.08	68.20	-0.12	59.99	6.60	34.55	33.06	185	192	Peak	HORIZONTAL
4	5622.00	96.53			88.24	6.74	34.65	33.10	185	192	Average	HORIZONTAL
5	5622.00	106.62			98.33	6.74	34.65	33.10	185	192	Peak	HORIZONTAL
6	5732.00	70.48	68.20	2.28	62.07	6.86	34.69	33.14	185	192	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

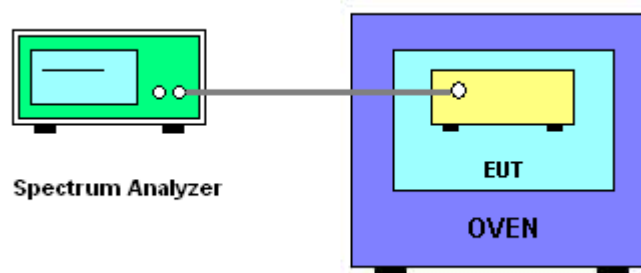



#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	20°C	<b>Humidity</b>	46%
<b>Test Engineer</b>	Lucas Huang, Clemens Fnag	<b>Test Date</b>	May 28, 2015

Mode: 20 MHz

##### Voltage vs. Frequency Stability

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>			
(V)	5200 MHz	5300 MHz	5580 MHz	5785 MHz
126.50	5199.9492	5299.9215	5579.9162	5784.9136
110.00	5199.9492	5299.9214	5579.9162	5784.9136
93.50	5199.9492	5299.9214	5579.9162	5784.9136
Max. Deviation (MHz)	<b>0.050799</b>	<b>0.078620</b>	<b>0.083830</b>	<b>0.086405</b>
Max. Deviation (ppm)	<b>9.77</b>	<b>14.83</b>	<b>15.02</b>	<b>14.94</b>

##### Temperature vs. Frequency Stability

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>			
(°C)	5200 MHz	5300 MHz	5580 MHz	5785 MHz
0	5199.9492	5299.9214	5579.9162	5784.9137
10	5199.9492	5299.9214	5579.9162	5784.9136
20	5199.9492	5299.9214	5579.9162	5784.9136
30	5199.9492	5299.9214	5579.9162	5784.9136
40	5199.9492	5299.9214	5579.9162	5784.9136
Max. Deviation (MHz)	<b>0.050800</b>	<b>0.078580</b>	<b>0.083790</b>	<b>0.086400</b>
Max. Deviation (ppm)	<b>9.77</b>	<b>14.83</b>	<b>15.02</b>	<b>14.94</b>

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz	5310 MHz	5550 MHz	5755 MHz
126.50	5189.9353	5309.9206	5549.9167	5754.9132
110.00	5189.9353	5309.9206	5549.9166	5754.9132
93.50	5189.9353	5309.9205	5549.9166	5754.9131
Max. Deviation (MHz)	<b>0.064720</b>	<b>0.079500</b>	<b>0.083390</b>	<b>0.086870</b>
Max. Deviation (ppm)	<b>12.47</b>	<b>14.97</b>	<b>15.03</b>	<b>15.09</b>

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz	5310 MHz	5550 MHz	5755 MHz
0	5189.9354	5309.9206	5549.9167	5754.9132
10	5189.9353	5309.9206	5549.9167	5754.9132
20	5189.9353	5309.9206	5549.9166	5754.9132
30	5189.9353	5309.9205	5549.9166	5754.9131
40	5189.9353	5309.9205	5549.9166	5754.9131
Max. Deviation (MHz)	<b>0.064720</b>	<b>0.079520</b>	<b>0.083390</b>	<b>0.086870</b>
Max. Deviation (ppm)	<b>12.47</b>	<b>14.98</b>	<b>15.03</b>	<b>15.09</b>

Mode: 80 MHz

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz	5290 MHz	5530 MHz	5775 MHz
126.50	5209.9223	5289.9210	5529.9176	5774.9142
110.00	5209.9223	5289.9210	5529.9175	5774.9140
93.50	5209.9223	5289.9209	5529.9175	5774.9141
Max. Deviation (MHz)	<b>0.077740</b>	<b>0.079130</b>	<b>0.082530</b>	<b>0.085960</b>
Max. Deviation (ppm)	<b>14.92</b>	<b>14.96</b>	<b>14.92</b>	<b>14.88</b>

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz	5290 MHz	5530 MHz	5775 MHz
0	5209.9223	5289.9210	5529.9175	5774.9141
10	5209.9223	5289.9210	5529.9176	5774.9141
20	5209.9223	5289.9210	5529.9175	5774.9140
30	5209.9222	5289.9209	5529.9175	5774.9140
40	5209.9223	5289.9210	5529.9175	5774.9140
Max. Deviation (MHz)	<b>0.077760</b>	<b>0.079060</b>	<b>0.082490</b>	<b>0.086000</b>
Max. Deviation (ppm)	<b>14.93</b>	<b>14.95</b>	<b>14.92</b>	<b>14.89</b>

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz ~ 30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%