



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan
FCC ID	RAXWN8722BTAAC
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	No.8, Sec.2, Guangfu Rd., Hsinchu, 30071 Taiwan

Product Name	WN8722BTAAC-VO
Brand Name	Arcadyan
Model No.	SBOM-06005-000
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	May 19, 2015
Final Test Date	Jun. 09, 2015
Submission Type	Original Equipment

### Statement

**Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle.....	10
3.11. Test Configurations .....	11
<b>4. TEST RESULT</b> .....	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	18
4.3. Power Spectral Density Measurement .....	20
4.4. 6dB Spectrum Bandwidth Measurement .....	27
4.5. Radiated Emissions Measurement .....	34
4.6. Emissions Measurement .....	52
4.7. Antenna Requirements .....	70
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>71</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>72</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b> .....	<b>A1 ~ A9</b>
<b>APPENDIX B. TEST PHOTOS</b> .....	<b>B1 ~ B9</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>C1 ~ C4</b>
<b>APPENDIX D. RADIATED EMISSION CO-LOCATION REPORT</b> .....	<b>D1 ~ D5</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR551972AA	Rev. 01	Initial issue of report	Jun. 18, 2015

## T. VERIFICATION OF COMPLIANCE

Product Name : WN8722BTAAC-VO  
Brand Name : Arcadyan  
Model No. : SBOM-06005-000  
Applicant : Arcadyan Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 19, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

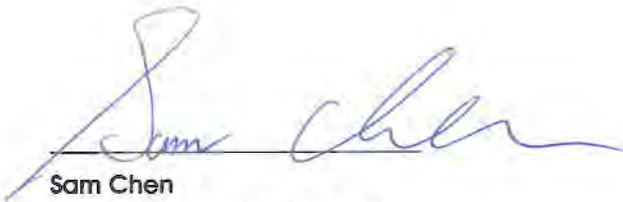

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.81 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	7.04 dB
4.3	15.247(e)	Power Spectral Density	Complies	3.85 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	4.07 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.02 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	IEEE 802.11b: 11.98 MHz IEEE 802.11g: 17.37 MHz IEEE 802.11ac MCS0-Nss1 VHT20: 18.32 MHz IEEE 802.11ac MCS0-Nss1 VHT40: 37.05 MHz
Maximum Conducted Output Power	IEEE 802.11b: 22.96 dBm IEEE 802.11g: 20.69 dBm IEEE 802.11ac MCS0-Nss1 VHT20: 21.32 dBm IEEE 802.11ac MCS0-Nss1 VHT40: 16.58 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming

**Antenna and Band width**

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

**IEEE 802.11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS0-15
802.11n (HT40)	2	MCS0-15
802.11ac (VHT20)	2	MCS0-09/Nss1-2
802.11ac (VHT40)	2	MCS0-09/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	Bluetooth
1	arcadyan	120800021300J	PCB Antenna	I-PEX	4.01	7.65	-
2	arcadyan	120800021400J	PCB Antenna	I-PEX	3.77	5.03	-
3	arcadyan	120800021500J	PCB Antenna	I-PEX	-	-	4.66

<For WLAN Function>

For IEEE 802.11a/b/g/n/ac mode (2TX/2RX)


Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

<For Bluetooth Function>

For Bluetooth mode (1TX/1RX)

Only Chain 3 can be used as transmitting/receiving antenna.

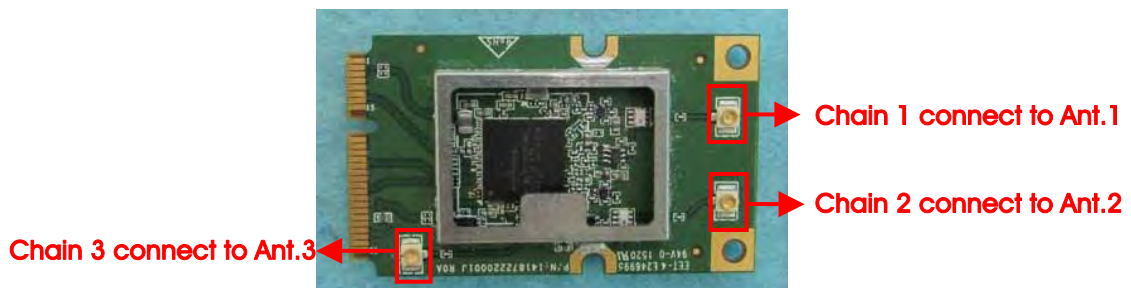



### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11ac VHT20	MCS0-Nss1	1/6/11	1+2
	11ac VHT40	MCS0-Nss1	3/6/9	1+2
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11ac VHT20	MCS0-Nss1	1/6/11	1+2
	11ac VHT40	MCS0-Nss1	3/6/9	1+2
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11ac VHT20	MCS0-Nss1	1/6/11	1+2
	11ac VHT40	MCS0-Nss1	3/6/9	1+2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11ac VHT20	MCS0-Nss1	1/6/11	1+2
	11ac VHT40	MCS0-Nss1	3/6/9	1+2
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
	11ac VHT20	MCS0-Nss1	1/6/11	1+2
	11ac VHT40	MCS0-Nss1	3/6/9	1+2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Below 1GHz):**

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above 1GHz):**

Mode 1. EUT X axis

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with below functions; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix C) and Radiated Emission Co-location (please refer to Appendix D) tests are added for simultaneously transmit.

Mode 1. EUT X axis - 2.4GHz WLAN Function + Bluetooth Function

Mode 2. EUT X axis - 5GHz WLAN Function + Bluetooth Function

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook *2	DELL	E6430	DoC
AP	Planex	GW-AP54SGX	KA220030603014-1
Earphone	e-Power	S90W	N/A
Mouse	HP	FM100	DoC
Fixture*2	Arcadyan	N/A	N/A
Device	Arcadyan	WN8722BTAAC-VO	N/A

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
Wireless ac AP	Netgear	R6300V2	PY313200227
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Fixture*2	Arcadyan	N/A	N/A
Device	Arcadyan	WN8722BTAAC-VO	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Fixture	Arcadyan	N/A	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool 2.0.2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	64	80	66	-	-	-
802.11g	52	74	68	-	-	-
802.11ac MCS0-Nss1 VHT20	50	76	66	-	-	-
802.11ac MCS0-Nss1 VHT40	-	-	-	36	44	54

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00%	0.00	0.01
802.11g	2.051	2.083	98.46%	0.07	0.01
802.11ac MCS0-Nss1 VHT20	1.915	1.947	98.36%	0.07	0.01
802.11ac MCS0-Nss1 VHT40	0.908	0.990	91.72%	0.38	1.10

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

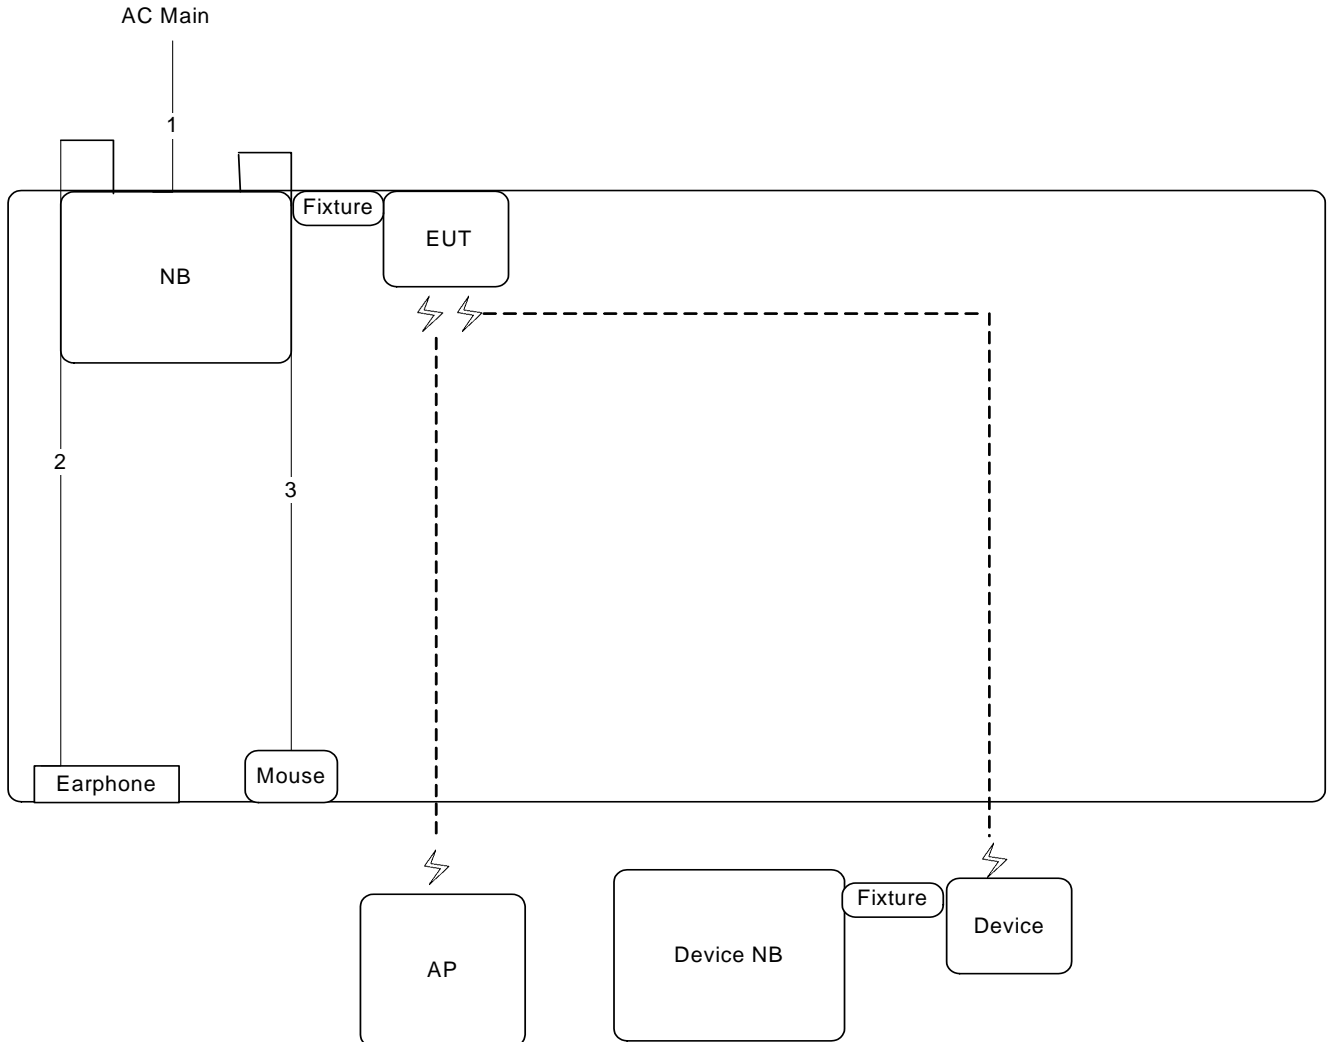

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.4m
3	USB cable	Yes	1.8m


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

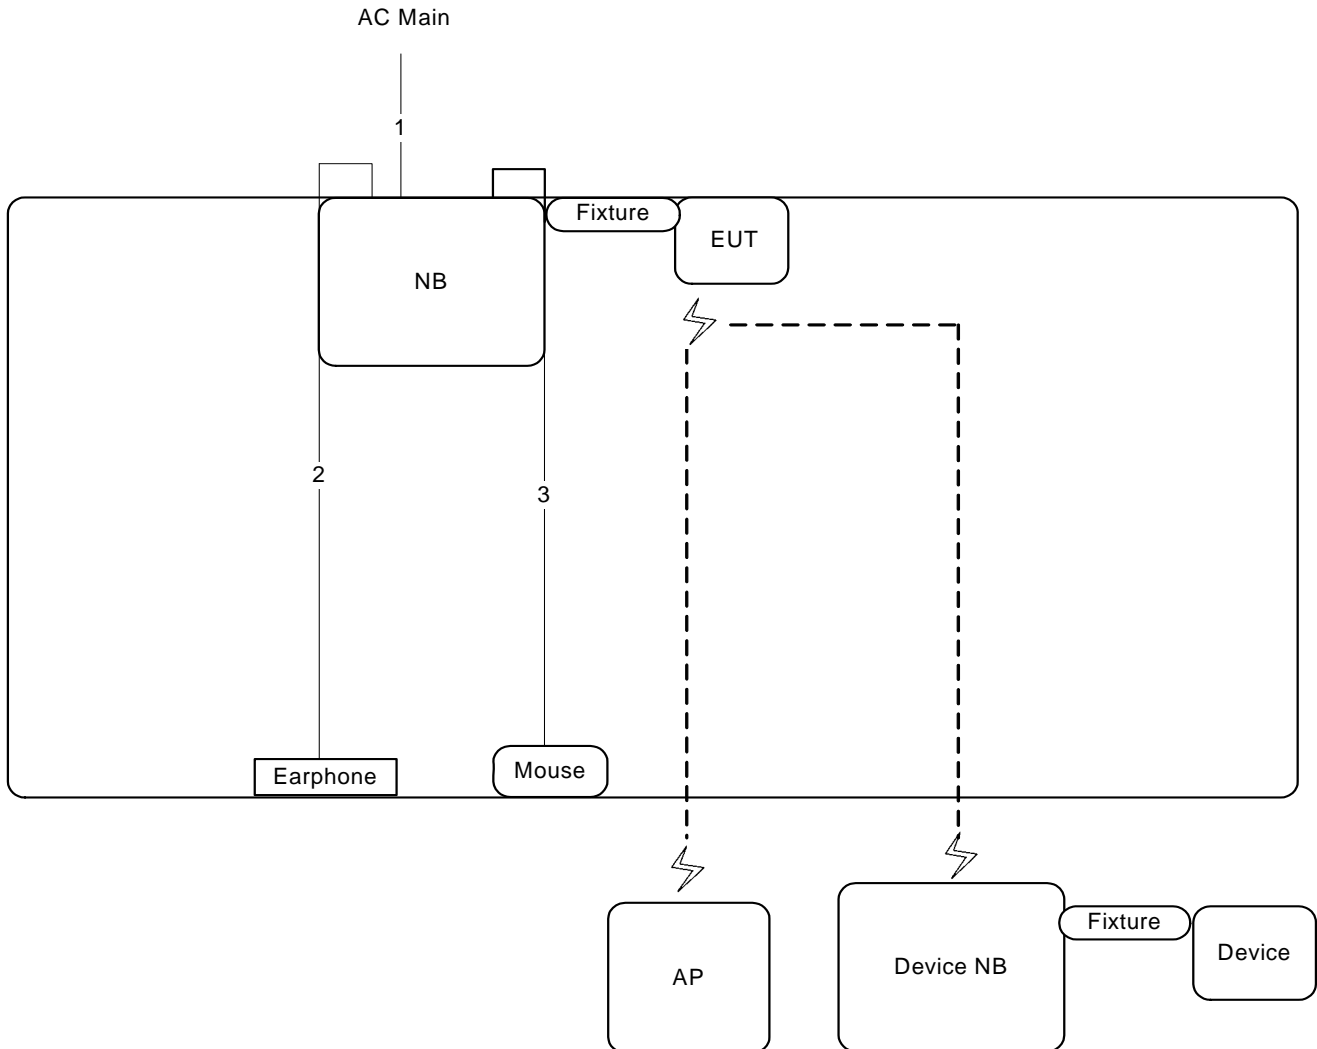

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.4m
3	USB cable	Yes	1.8m

Test Configuration: above 1GHz

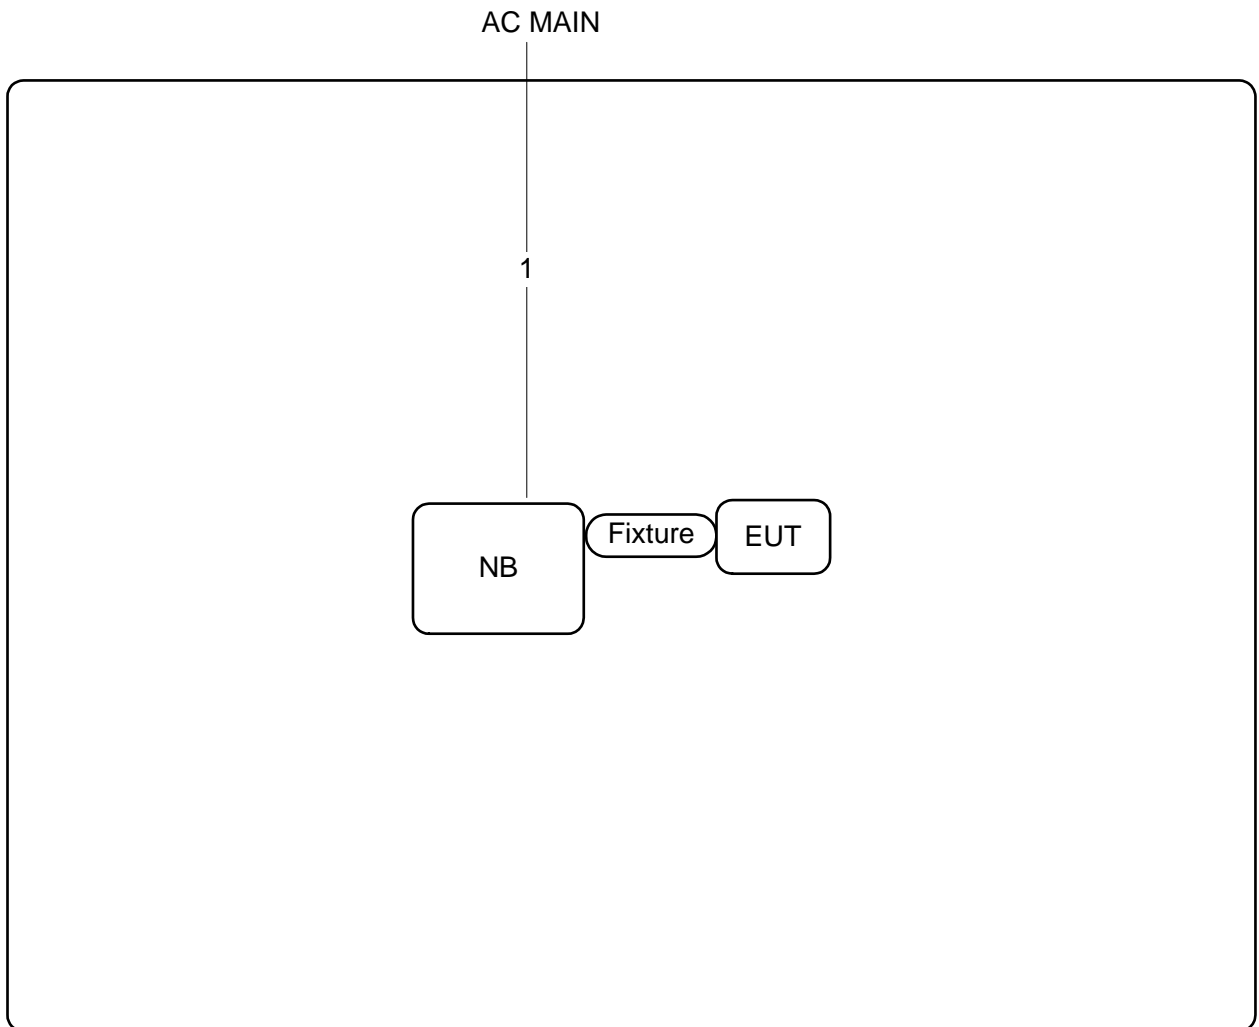

Item	Connection	Shielded	Length
1	Power cable	No	2.6m



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	70%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link / Mode 1		

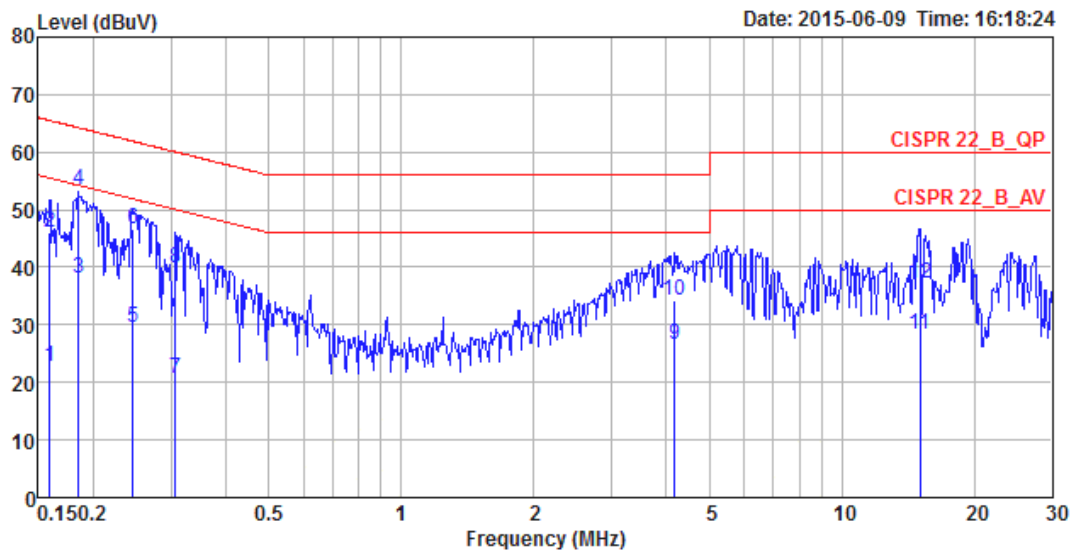

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1590	22.83	-32.69	55.52	12.88	9.93	0.02	LINE	Average
2	0.1590	45.94	-19.58	65.52	35.99	9.93	0.02	LINE	QP
3	0.1854	37.97	-16.27	54.24	28.02	9.93	0.02	LINE	Average
4	0.1854	53.43	-10.81	64.24	43.48	9.93	0.02	LINE	QP
5	0.2455	29.56	-22.35	51.91	19.60	9.93	0.03	LINE	Average
6	0.2455	46.59	-15.32	61.91	36.63	9.93	0.03	LINE	QP
7	0.3067	20.68	-29.38	50.06	10.71	9.93	0.04	LINE	Average
8	0.3067	39.72	-20.34	60.06	29.75	9.93	0.04	LINE	QP
9	4.1796	26.70	-19.30	46.00	16.59	10.03	0.08	LINE	Average
10	4.1796	34.19	-21.81	56.00	24.08	10.03	0.08	LINE	QP
11	15.0656	28.24	-21.76	50.00	17.65	10.33	0.26	LINE	Average
12	15.0656	37.33	-22.67	60.00	26.74	10.33	0.26	LINE	QP

Temperature	24°C	Humidity	70%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link / Mode 1		

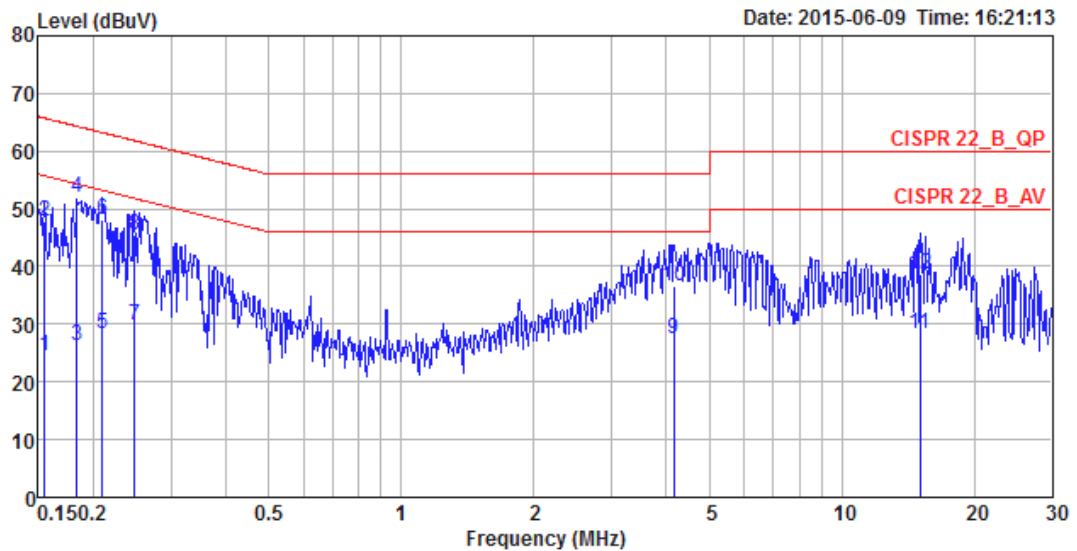

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1548	24.57	-31.17	55.74	14.77	9.78	0.02	NEUTRAL	Average
2	0.1548	47.82	-17.92	65.74	38.02	9.78	0.02	NEUTRAL	QP
3	0.1835	26.23	-28.10	54.33	16.42	9.79	0.02	NEUTRAL	Average
4	0.1835	51.89	-12.44	64.33	42.08	9.79	0.02	NEUTRAL	QP
5	0.2094	28.21	-25.02	53.23	18.40	9.79	0.02	NEUTRAL	Average
6	0.2094	48.14	-15.09	63.23	38.33	9.79	0.02	NEUTRAL	QP
7	0.2481	29.91	-21.91	51.82	20.09	9.79	0.03	NEUTRAL	Average
8	0.2481	45.35	-16.47	61.82	35.53	9.79	0.03	NEUTRAL	QP
9	4.1575	27.45	-18.55	46.00	17.51	9.87	0.07	NEUTRAL	Average
10	4.1575	36.66	-19.34	56.00	26.72	9.87	0.07	NEUTRAL	QP
11	15.0656	28.41	-21.59	50.00	18.04	10.11	0.26	NEUTRAL	Average
12	15.0656	38.57	-21.43	60.00	28.20	10.11	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

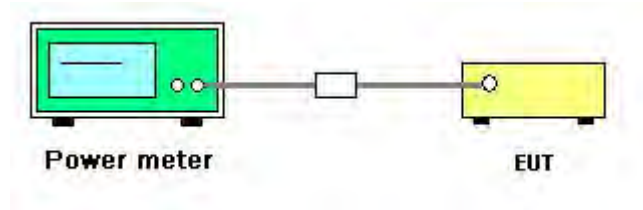

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	20°C	<b>Humidity</b>	46%
<b>Test Engineer</b>	Lucas Huang, Clemens Fang	<b>Test Date</b>	May 28, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11b	2412 MHz	16.52	15.89	19.23	30.00	Complies
	2437 MHz	20.65	19.12	22.96	30.00	Complies
	2462 MHz	15.59	15.03	18.33	30.00	Complies
802.11g	2412 MHz	12.88	13.11	16.01	30.00	Complies
	2437 MHz	17.84	17.52	20.69	30.00	Complies
	2462 MHz	16.28	16.04	19.17	30.00	Complies
802.11ac MCS0-Nss1 VHT20	2412 MHz	12.48	11.97	15.24	30.00	Complies
	2437 MHz	18.43	18.19	21.32	30.00	Complies
	2462 MHz	16.21	15.46	18.86	30.00	Complies
802.11ac MCS0-Nss1 VHT40	2422 MHz	8.26	8.12	11.20	30.00	Complies
	2437 MHz	11.12	10.82	13.98	30.00	Complies
	2452 MHz	13.64	13.5	16.58	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

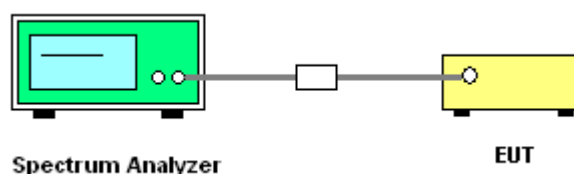

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	46%
Test Engineer	Lucas Huang, Clemens Fang		

Mode	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
802.11b	2412 MHz	-3.52	-3.93	-0.71	7.10	Complies
	2437 MHz	0.33	0.15	3.25	7.10	Complies
	2462 MHz	-4.20	-4.57	-1.37	7.10	Complies
802.11g	2412 MHz	-12.00	-12.21	-9.09	7.10	Complies
	2437 MHz	-6.91	-7.06	-3.97	7.10	Complies
	2462 MHz	-8.52	-8.89	-5.69	7.10	Complies
802.11ac	2412 MHz	-12.04	-12.50	-9.25	7.10	Complies
MCS0-Nss1	2437 MHz	-6.43	-6.74	-3.57	7.10	Complies
VHT20	2462 MHz	-8.47	-9.14	-5.78	7.10	Complies
802.11ac	2422 MHz	-17.86	-18.41	-15.12	7.10	Complies
MCS0-Nss1	2437 MHz	-16.64	-16.83	-13.72	7.10	Complies
VHT40	2452 MHz	-14.07	-14.27	-11.16	7.10	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$  6.90=dBi, so limit = 8 - (6.90-6)=7.10dBm/3kHz.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1




Date: 28.MAY.2015 15:31:54

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1




Date: 28.MAY.2015 15:30:35

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

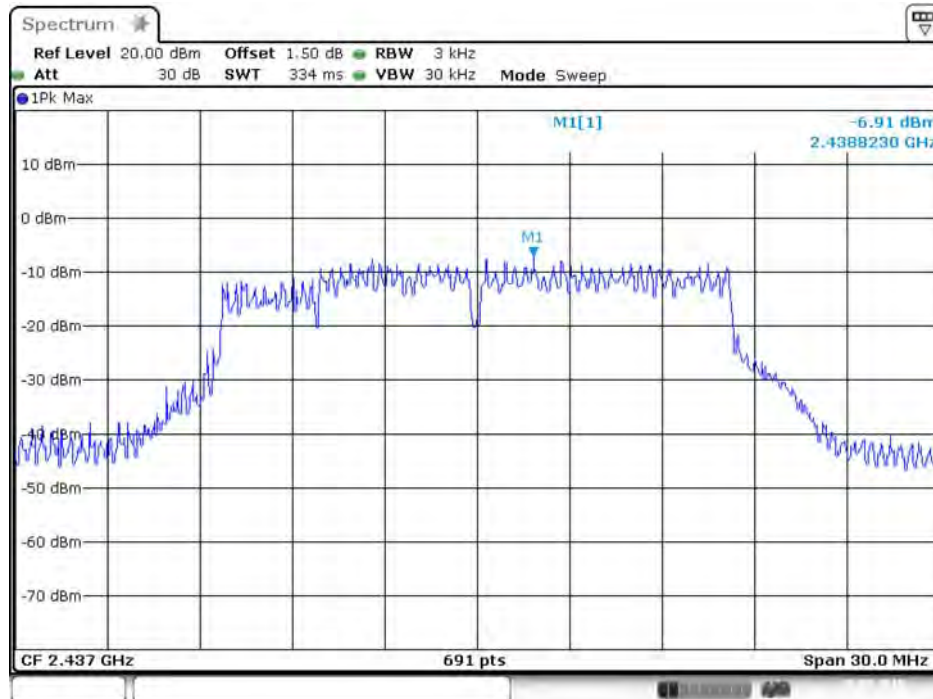


Date: 28.MAY.2015 15:37:58

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

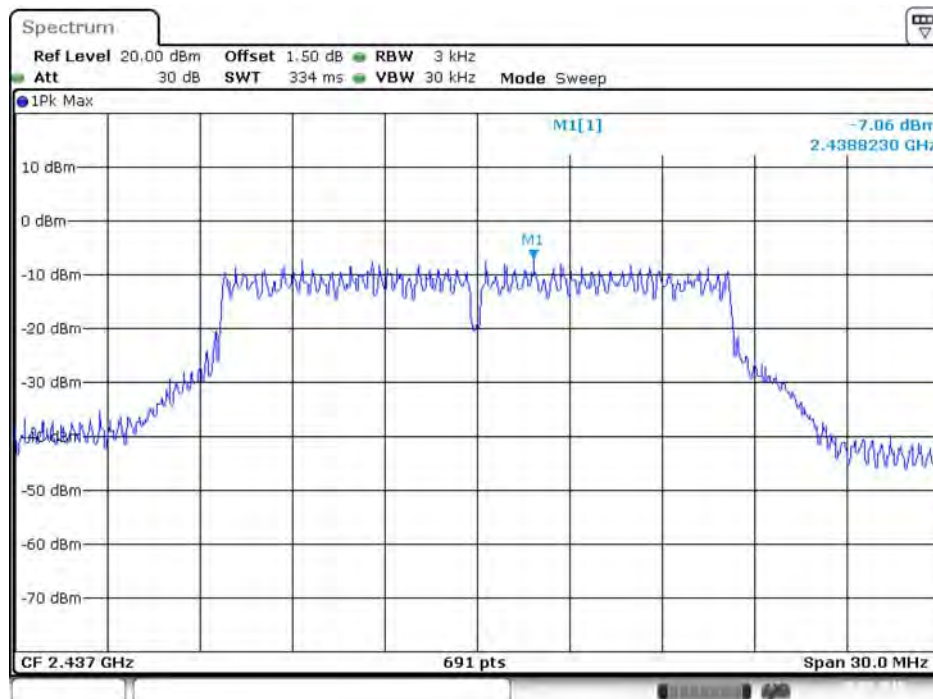


Date: 28.MAY.2015 15:38:43

Power Density Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / 2437 MHz / Chain 1

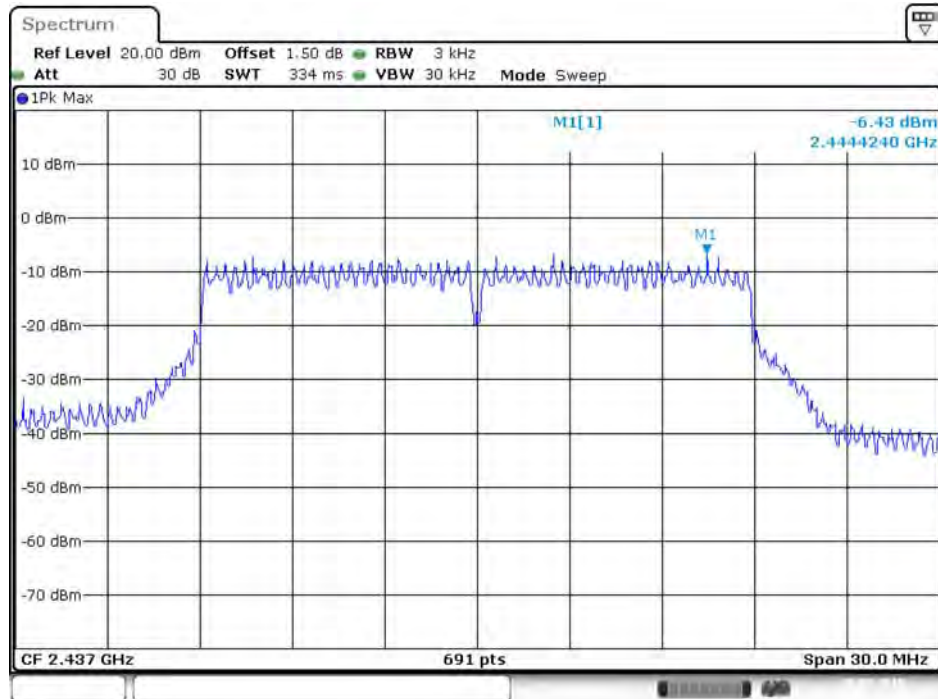


Date: 28.MAY.2015 15:45:03

Power Density Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / 2437 MHz / Chain 2

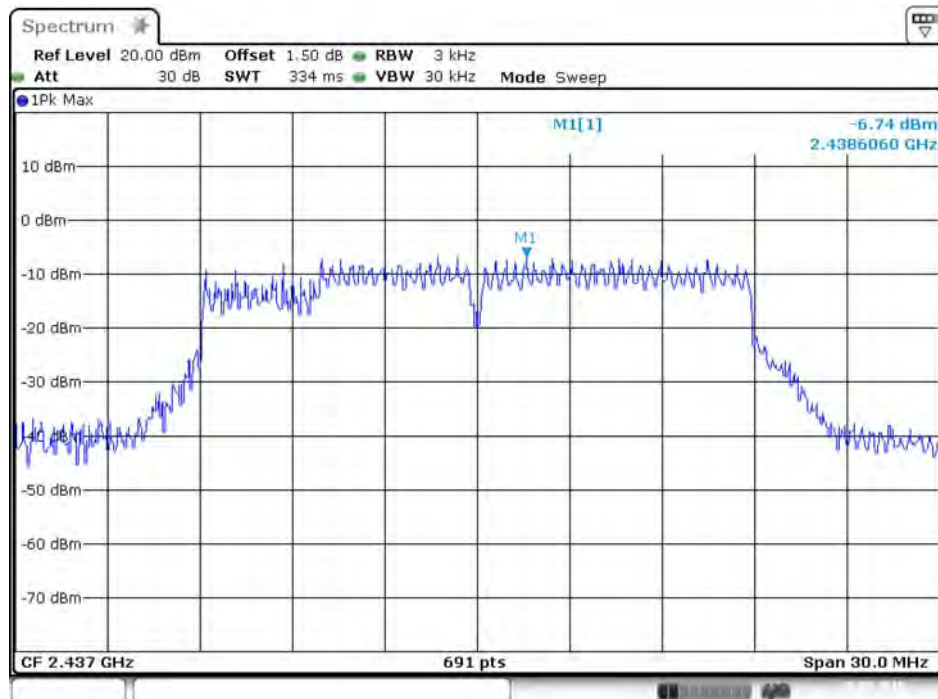


Date: 28.MAY.2015 15:44:49

Power Density Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / 2452 MHz / Chain 1

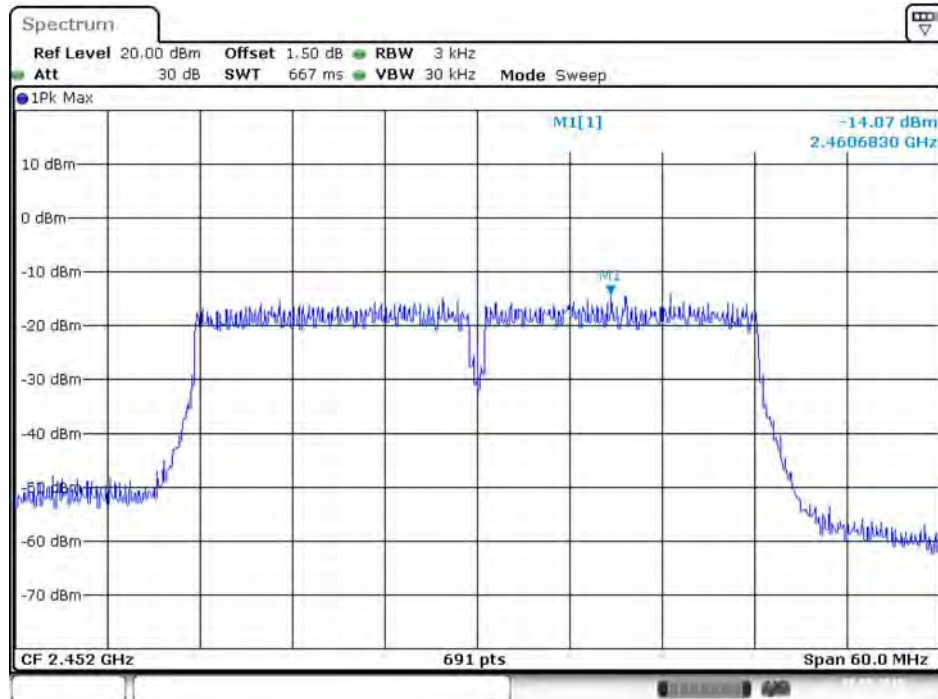

Date: 28.MAY.2015 15:56:56

Power Density Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / 2452 MHz / Chain 2

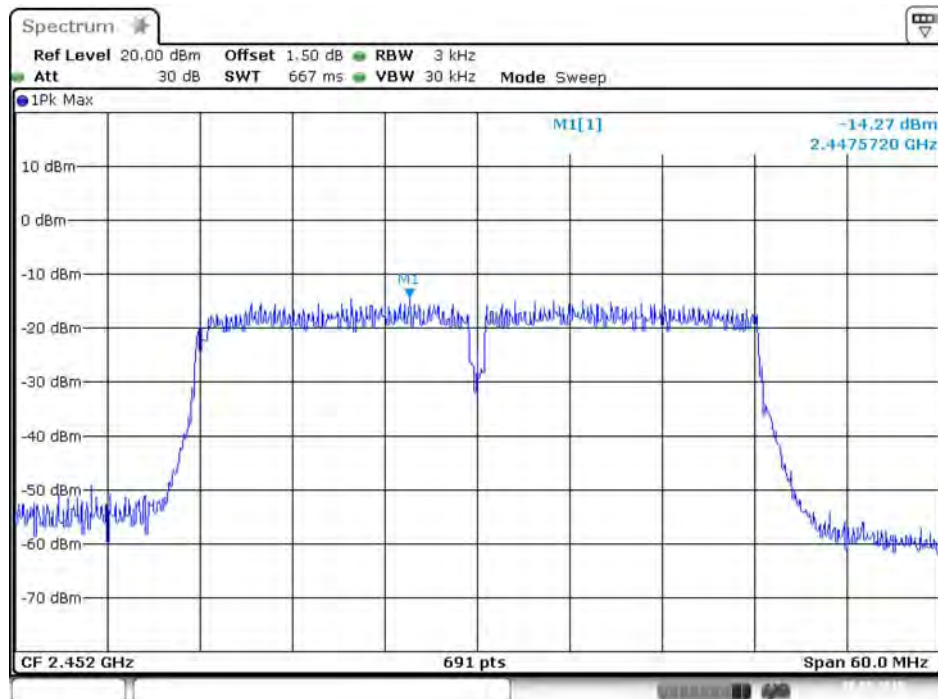

Date: 28.MAY.2015 15:56:36



## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	20°C	<b>Humidity</b>	46%
<b>Test Engineer</b>	Lucas Huang, Clemens Fang		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.54	11.11	500	Complies
	2437 MHz	8.06	11.98	500	Complies
	2462 MHz	8.06	10.85	500	Complies
802.11g	2412 MHz	13.33	16.85	500	Complies
	2437 MHz	12.58	17.37	500	Complies
	2462 MHz	12.58	16.85	500	Complies
802.11ac MCS0-Nss1 VHT20	2412 MHz	15.42	17.71	500	Complies
	2437 MHz	15.77	18.32	500	Complies
	2462 MHz	16.35	17.80	500	Complies
802.11ac MCS0-Nss1 VHT40	2422 MHz	35.01	37.05	500	Complies
	2437 MHz	35.83	37.05	500	Complies
	2452 MHz	35.59	37.05	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2

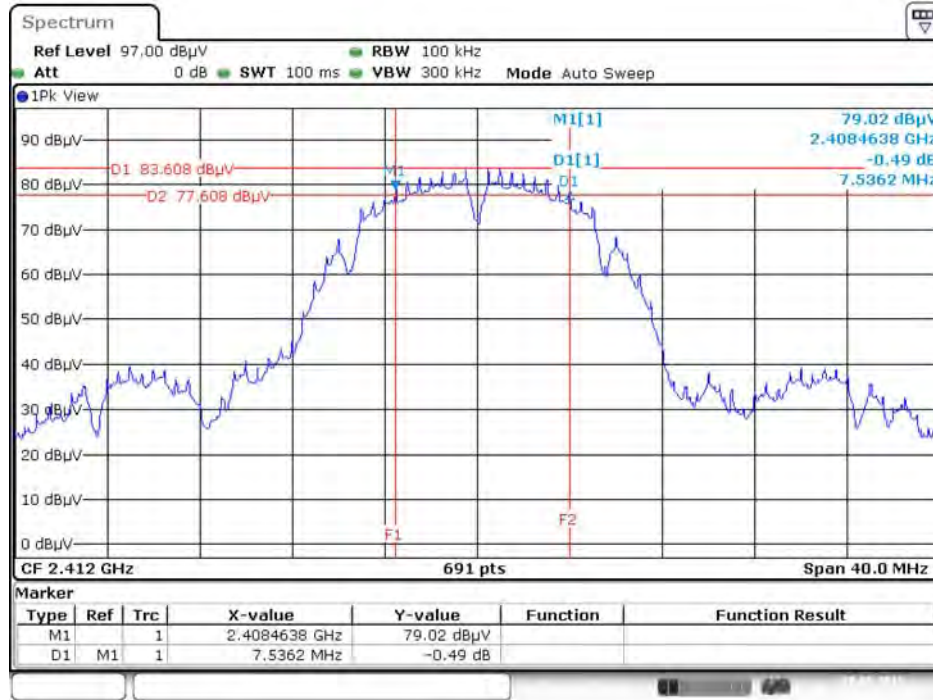


Date: 28.MAY.2015 16:01:05

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2

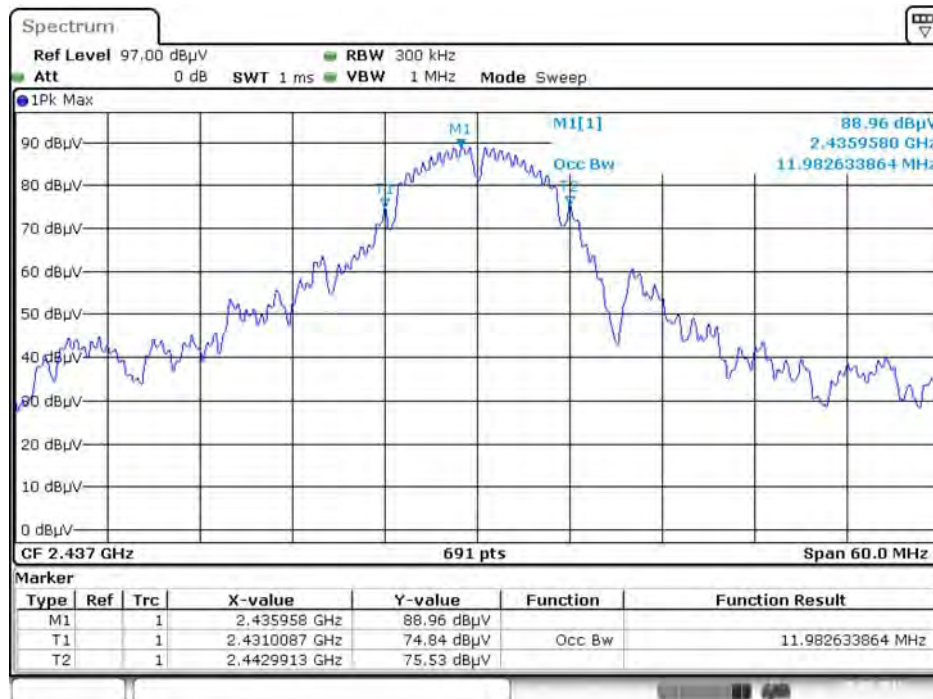

Date: 28.MAY.2015 16:16:32

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2

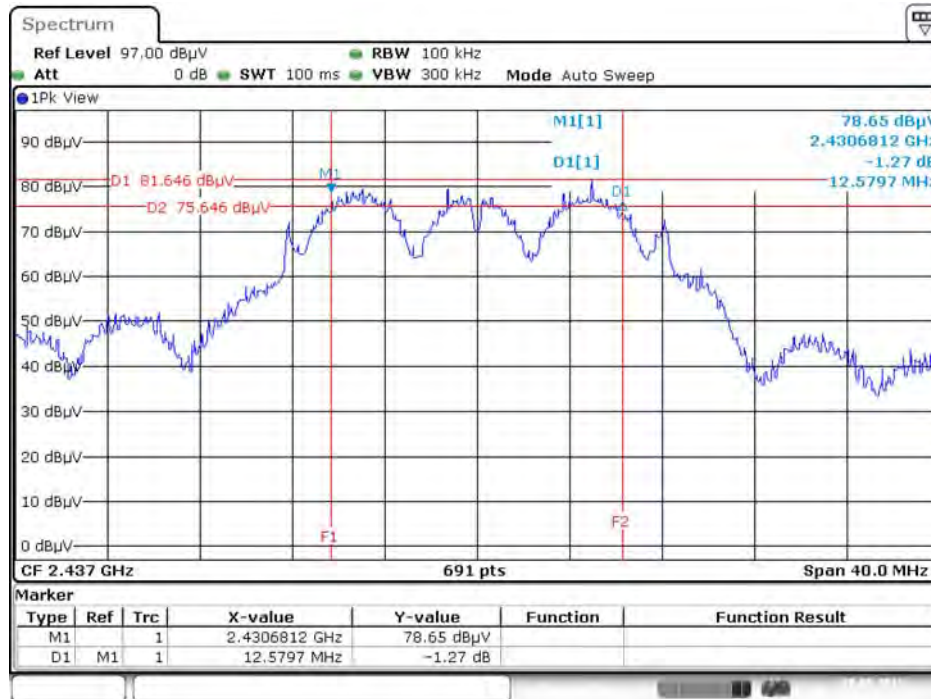


Date: 28.MAY.2015 16:04:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2




Date: 28.MAY.2015 16:21:31

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2

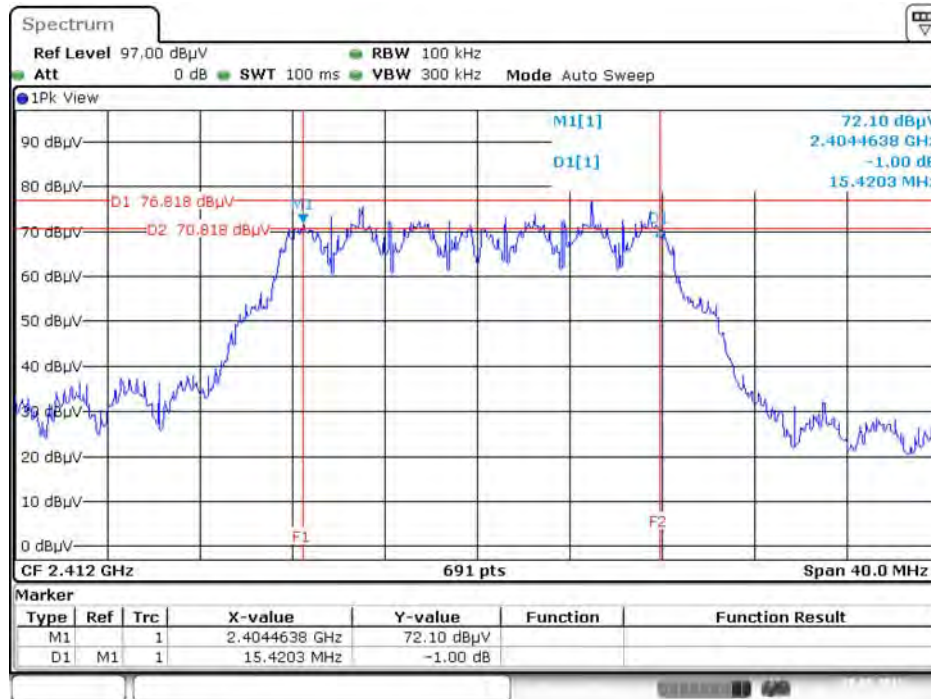

Date: 28.MAY.2015 16:05:46


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2

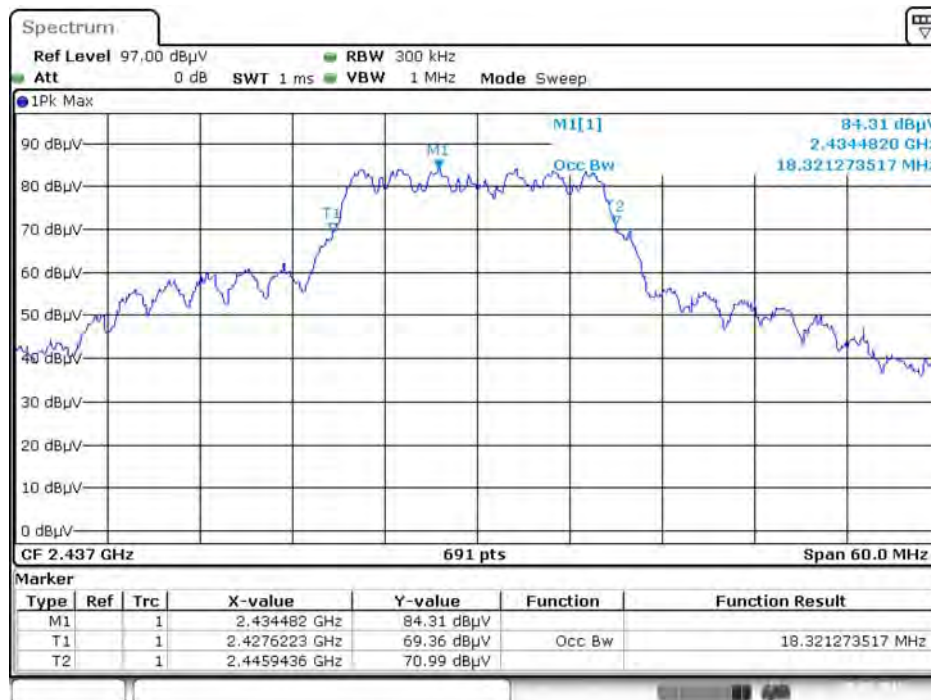

Date: 28.MAY.2015 16:26:43




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2

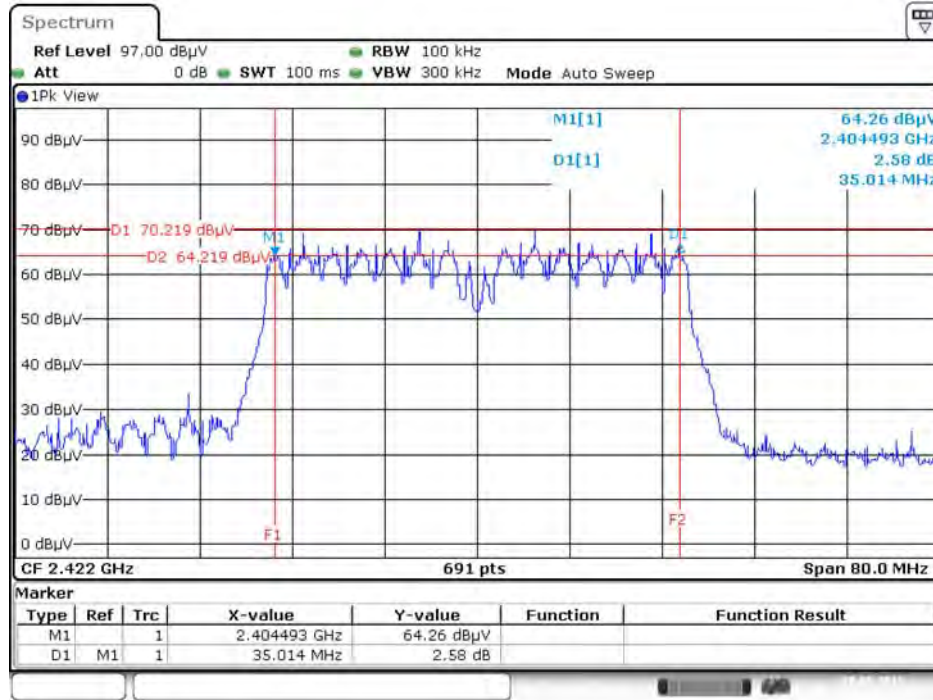

Date: 28.MAY.2015 16:07:38

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2

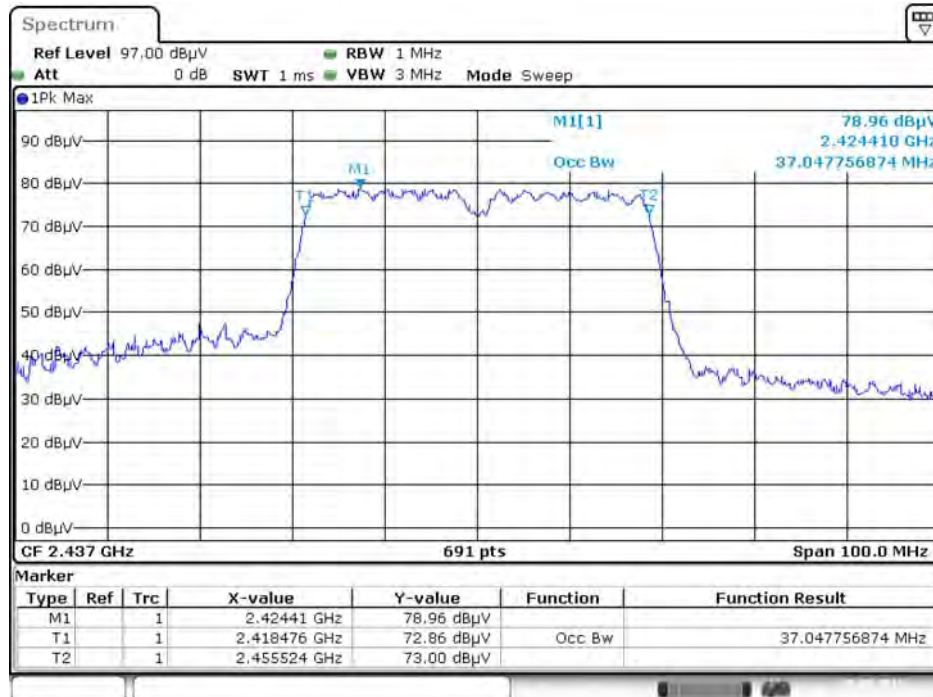

Date: 28.MAY.2015 16:11:52

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

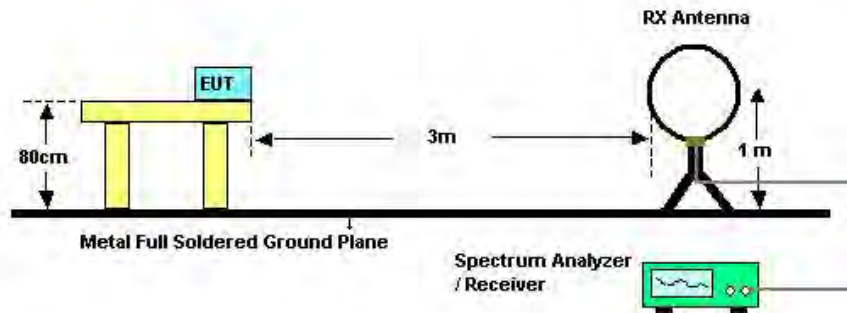

For Radiated Emissions: 30MHz~1GHz

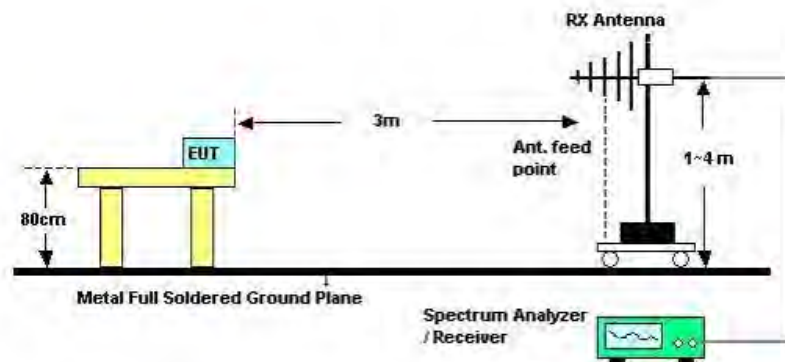

For Radiated Emissions: Above 1GHz

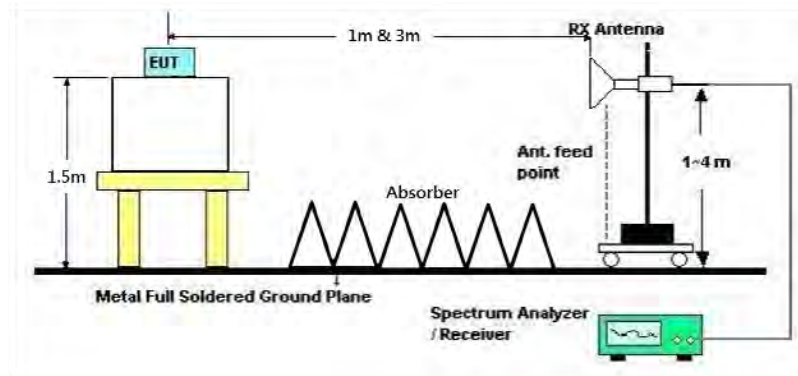

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	Normal Link / Mode 2
<b>Test Date</b>	Jun. 08, 2015		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	Normal Link / Mode 2

Horizontal

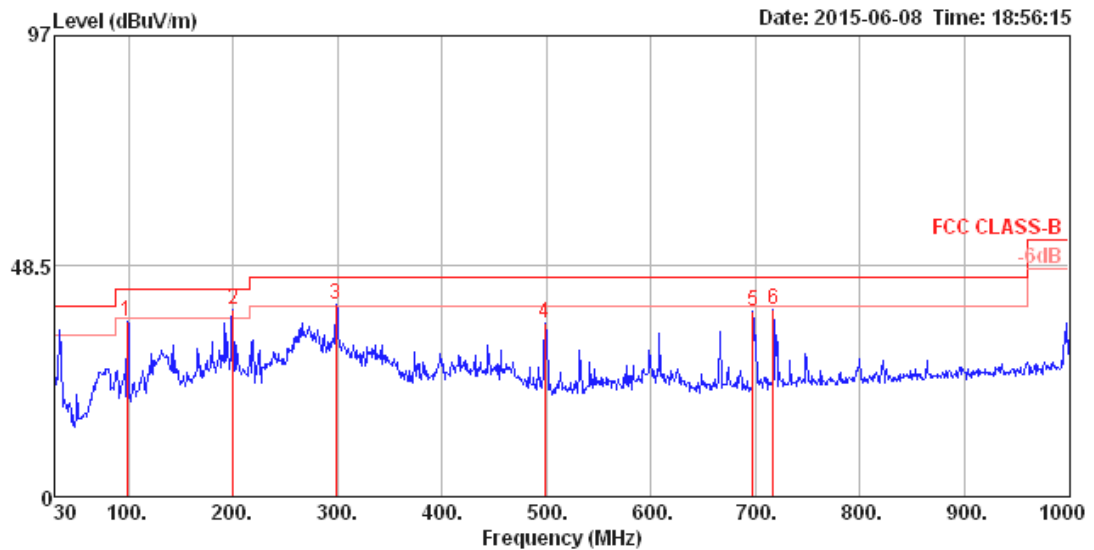

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	98.87	36.86	43.50	-6.64	52.31	1.17	10.17	26.79	200	0	HORIZONTAL Peak
2	199.75	39.43	43.50	-4.07	58.51	1.70	8.75	29.53	150	291	HORIZONTAL Peak
3	298.69	40.47	46.00	-5.53	55.31	2.12	12.98	29.94	125	69	HORIZONTAL Peak
4	498.51	36.40	46.00	-9.60	44.37	2.81	16.90	27.68	150	360	HORIZONTAL Peak
5	697.36	38.86	46.00	-7.14	44.61	3.40	18.89	28.04	100	360	HORIZONTAL Peak
6	716.76	39.27	46.00	-6.73	44.54	3.44	19.23	27.94	150	244	HORIZONTAL Peak

**Vertical**

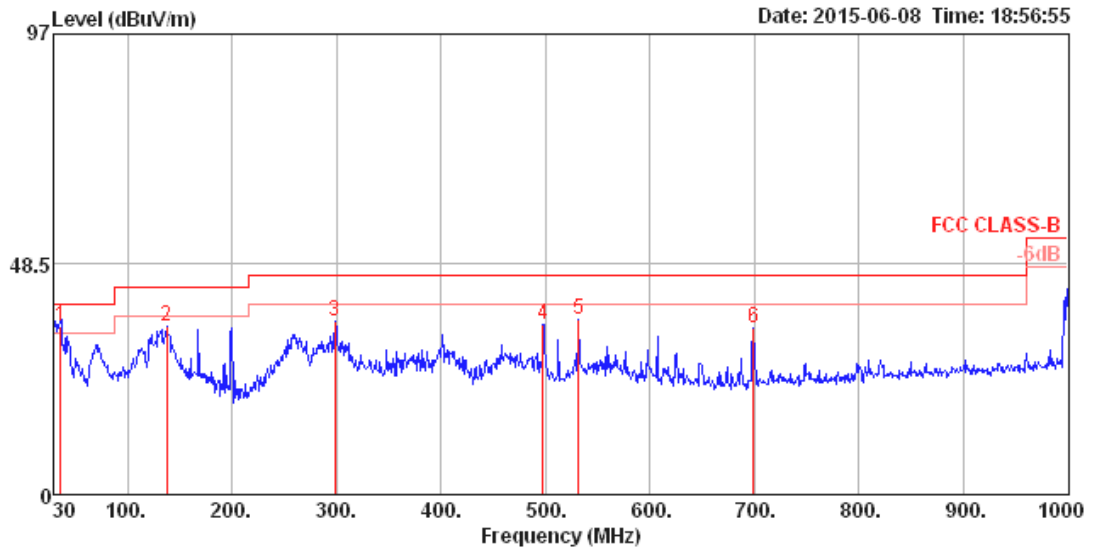

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	35.82	35.36	40.00	-4.64	45.55	0.70	14.62	25.51	125	92	VERTICAL QP
2	137.67	35.35	43.50	-8.15	50.98	1.39	11.05	28.07	100	113	VERTICAL Peak
3	298.69	36.58	46.00	-9.42	51.42	2.12	12.98	29.94	125	175	VERTICAL Peak
4	497.54	35.89	46.00	-10.11	43.88	2.81	16.88	27.68	200	0	VERTICAL Peak
5	531.49	36.75	46.00	-9.25	44.13	2.89	17.60	27.87	100	279	VERTICAL Peak
6	699.30	35.09	46.00	-10.91	40.77	3.41	18.94	28.03	150	339	VERTICAL Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2
Test Date	May 19, 2015		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.83	48.93	74.00	-25.07	45.20	5.87	32.82	34.96	Peak	208	17	HORIZONTAL
2	4823.87	41.82	54.00	-12.18	38.09	5.87	32.82	34.96	Average	208	17	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.86	39.29	54.00	-14.71	35.56	5.87	32.82	34.96	Average	188	183	VERTICAL
2	4823.97	48.14	74.00	-25.86	44.41	5.87	32.82	34.96	Peak	188	183	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.84	42.14	54.00	-11.86	38.25	5.92	32.93	34.96	Average	174	343	HORIZONTAL
2	4874.30	49.52	74.00	-24.48	45.63	5.92	32.93	34.96	Peak	174	343	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.91	40.36	54.00	-13.64	36.47	5.92	32.93	34.96	Average	199	13	VERTICAL
2	4874.06	49.05	74.00	-24.95	45.16	5.92	32.93	34.96	Peak	199	13	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.84	45.42	54.00	-8.58	41.35	5.97	33.05	34.95	Average	198	340	HORIZONTAL
2	4923.86	50.73	74.00	-23.27	46.66	5.97	33.05	34.95	Peak	198	340	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.88	41.26	54.00	-12.74	37.19	5.97	33.05	34.95	Average	196	185	VERTICAL
2	4924.07	48.94	74.00	-25.06	44.87	5.97	33.05	34.95	Peak	196	185	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4822.11	47.50	74.00	-26.50	40.91	6.11	33.56	33.08	318	155	Peak	HORIZONTAL
2	4822.58	35.00	54.00	-19.00	28.41	6.11	33.56	33.08	318	155	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.86	47.84	74.00	-26.16	41.25	6.11	33.56	33.08	23	152	Peak	VERTICAL
2	4824.00	34.45	54.00	-19.55	27.86	6.11	33.56	33.08	23	152	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4871.71	35.56	54.00	-18.44	28.90	6.08	33.66	33.08	50	164	Average	HORIZONTAL
2	4873.52	46.93	74.00	-27.07	40.27	6.08	33.66	33.08	50	164	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.31	47.94	74.00	-26.06	41.28	6.08	33.66	33.08	192	153	Peak	VERTICAL
2	4874.49	34.99	54.00	-19.01	28.33	6.08	33.66	33.08	192	153	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4922.03	34.41	54.00	-19.59	27.66	6.05	33.76	33.06	271	151	Average	HORIZONTAL
2	4925.69	46.63	74.00	-27.37	39.88	6.05	33.76	33.06	271	151	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4921.63	34.38	54.00	-19.62	27.63	6.05	33.76	33.06	226	157	Average	VERTICAL
2	4923.97	47.27	74.00	-26.73	40.52	6.05	33.76	33.06	226	157	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT20 CH 1 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.71	49.51	74.00	-24.49	42.92	6.11	33.56	33.08	203	150	Peak	HORIZONTAL
2	4824.90	36.90	54.00	-17.10	30.31	6.11	33.56	33.08	203	150	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.65	36.51	54.00	-17.49	29.92	6.11	33.56	33.08	281	156	Average	VERTICAL
2	4825.57	49.93	74.00	-24.07	43.34	6.11	33.56	33.08	281	156	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT20 CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.08	49.46	74.00	-24.54	42.80	6.08	33.66	33.08	122	153	Peak	HORIZONTAL
2	4873.93	36.05	54.00	-17.95	29.39	6.08	33.66	33.08	122	153	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.30	49.66	74.00	-24.34	43.00	6.08	33.66	33.08	147	156	Peak	VERTICAL
2	4874.38	35.83	54.00	-18.17	29.17	6.08	33.66	33.08	147	156	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT20 CH 11 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.44	36.07	54.00	-17.93	29.32	6.05	33.76	33.06	127	154	Average	HORIZONTAL
2	4924.31	49.54	74.00	-24.46	42.79	6.05	33.76	33.06	127	154	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.01	49.16	74.00	-24.84	42.41	6.05	33.76	33.06	89	162	Peak	VERTICAL
2	4923.41	36.24	54.00	-17.76	29.49	6.05	33.76	33.06	89	162	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT40 CH 3 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.17	49.36	74.00	-24.64	42.75	6.10	33.59	33.08	150	155	Peak	HORIZONTAL
2	4843.52	36.02	54.00	-17.98	29.41	6.10	33.59	33.08	150	155	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4844.00	49.96	74.00	-24.04	43.35	6.10	33.59	33.08	62	163	Peak	VERTICAL
2	4844.64	36.08	54.00	-17.92	29.47	6.10	33.59	33.08	62	163	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT40 CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.34	36.11	54.00	-17.89	29.45	6.08	33.66	33.08	142	155	Average	HORIZONTAL
2	4874.79	49.76	74.00	-24.24	43.10	6.08	33.66	33.08	142	155	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.08	36.13	54.00	-17.87	29.47	6.08	33.66	33.08	189	165	Average	VERTICAL
2	4874.72	49.75	74.00	-24.25	43.09	6.08	33.66	33.08	189	165	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT40 CH 9 / Chain 1 + Chain 2
<b>Test Date</b>	May 23, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.07	49.48	74.00	-24.52	42.75	6.07	33.73	33.07	252	154	Peak	HORIZONTAL
2	4904.91	36.37	54.00	-17.63	29.64	6.07	33.73	33.07	252	154	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4904.12	36.20	54.00	-17.80	29.47	6.07	33.73	33.07	199	160	Average	VERTICAL
2	4904.69	49.55	74.00	-24.45	42.82	6.07	33.73	33.07	199	160	Peak	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure

#### 4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 23, 2015		

##### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.53	62.85	74.00	-11.15	29.92	4.09	28.84	0.00	Peak	230	191	HORIZONTAL
2	2386.96	52.75	54.00	-1.25	19.82	4.09	28.84	0.00	Average	230	191	HORIZONTAL
3	2411.13	109.89			76.93	4.11	28.85	0.00	Average	230	191	HORIZONTAL
4	2411.13	112.12			79.16	4.11	28.85	0.00	Peak	230	191	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	49.48	54.00	-4.52	16.55	4.09	28.84	0.00	Average	227	183	HORIZONTAL
2	2390.00	62.28	74.00	-11.72	29.35	4.09	28.84	0.00	Peak	227	183	HORIZONTAL
3	2436.13	112.89			79.91	4.12	28.86	0.00	Average	227	183	HORIZONTAL
4	2436.13	115.28			82.30	4.12	28.86	0.00	Peak	227	183	HORIZONTAL
5	2484.95	48.59	54.00	-5.41	15.54	4.16	28.89	0.00	Average	227	183	HORIZONTAL
6	2486.39	61.79	74.00	-12.21	28.74	4.16	28.89	0.00	Peak	227	183	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2461.13	110.39			77.37	4.14	28.88	0.00	Average	263	171	HORIZONTAL
2	2461.13	112.67			79.65	4.14	28.88	0.00	Peak	263	171	HORIZONTAL
3	2483.50	53.44	54.00	-0.56	20.39	4.16	28.89	0.00	Average	263	171	HORIZONTAL
4	2483.50	62.94	74.00	-11.06	29.89	4.16	28.89	0.00	Peak	263	171	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test Date</b>	May 19, 2015, May 23, 2015		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.36	54.00	-0.64	20.43	4.09	28.84	0.00	Average	273	169	HORIZONTAL
2	2390.00	67.28	74.00	-6.72	34.35	4.09	28.84	0.00	Peak	273	169	HORIZONTAL
3	2416.34	99.70			66.74	4.11	28.85	0.00	Average	273	169	HORIZONTAL
4	2416.34	110.86			77.90	4.11	28.85	0.00	Peak	273	169	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.42	69.96	74.00	-4.04	37.03	4.09	28.84	0.00	Peak	277	164	HORIZONTAL
2	2390.00	53.42	54.00	-0.58	20.49	4.09	28.84	0.00	Average	277	164	HORIZONTAL
3	2430.92	104.15			71.17	4.12	28.86	0.00	Average	277	164	HORIZONTAL
4	2441.34	114.77			81.77	4.13	28.87	0.00	Peak	277	164	HORIZONTAL
5	2483.50	49.62	54.00	-4.38	16.57	4.16	28.89	0.00	Average	277	164	HORIZONTAL
6	2483.50	65.99	74.00	-8.01	32.94	4.16	28.89	0.00	Peak	277	164	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2466.34	113.98			80.96	4.14	28.88	0.00	Peak	266	169	HORIZONTAL
2	2466.49	103.00			69.98	4.14	28.88	0.00	Average	266	169	HORIZONTAL
3	2484.80	67.53	74.00	-6.47	34.48	4.16	28.89	0.00	Peak	266	169	HORIZONTAL
4	2485.09	53.19	54.00	-0.81	20.14	4.16	28.89	0.00	Average	266	169	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test date</b>	May 19, 2015, May 23, 2015		

### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.42	53.93	54.00	-0.07	21.00	4.09	28.84	0.00	Average	252	169	HORIZONTAL
2	2389.71	72.81	74.00	-1.19	39.88	4.09	28.84	0.00	Peak	252	169	HORIZONTAL
3	2416.63	97.88			64.92	4.11	28.85	0.00	Average	252	169	HORIZONTAL
4	2417.07	109.30			76.34	4.11	28.85	0.00	Peak	252	169	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.84	53.89	54.00	-0.11	20.96	4.09	28.84	0.00	Average	268	165	HORIZONTAL
2	2388.84	68.97	74.00	-5.03	36.04	4.09	28.84	0.00	Peak	268	165	HORIZONTAL
3	2431.50	115.73			82.75	4.12	28.86	0.00	Peak	268	165	HORIZONTAL
4	2439.03	104.44			71.44	4.13	28.87	0.00	Average	268	165	HORIZONTAL
5	2483.50	52.03	54.00	-1.97	18.98	4.16	28.89	0.00	Average	268	165	HORIZONTAL
6	2483.50	66.26	74.00	-7.74	33.21	4.16	28.89	0.00	Peak	268	165	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2469.09	100.85			67.83	4.14	28.88	0.00	Average	255	169	HORIZONTAL
2	2469.38	112.60			79.58	4.14	28.88	0.00	Peak	255	169	HORIZONTAL
3	2483.50	53.83	54.00	-0.17	20.78	4.16	28.89	0.00	Average	255	169	HORIZONTAL
4	2483.79	68.57	74.00	-5.43	35.52	4.16	28.89	0.00	Peak	255	169	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung	<b>Configurations</b>	IEEE 802.11ac MCS0-Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2
<b>Test date</b>	May 19, 2015, May 23, 2015		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.82	65.85	74.00	-8.15	32.92	4.09	28.84	0.00	Peak	249	170	HORIZONTAL
2	2389.42	53.98	54.00	-0.02	21.05	4.09	28.84	0.00	Average	249	170	HORIZONTAL
3	2414.47	103.72			70.76	4.11	28.85	0.00	Peak	249	170	HORIZONTAL
4	2419.11	93.86			60.90	4.11	28.85	0.00	Average	249	170	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.13	68.61	74.00	-5.39	35.68	4.09	28.84	0.00	Peak	274	176	HORIZONTAL
2	2389.71	53.70	54.00	-0.30	20.77	4.09	28.84	0.00	Average	274	176	HORIZONTAL
3	2423.98	95.95			62.97	4.12	28.86	0.00	Average	274	176	HORIZONTAL
4	2424.84	106.03			73.05	4.12	28.86	0.00	Peak	274	176	HORIZONTAL
5	2483.50	49.08	54.00	-4.92	16.03	4.16	28.89	0.00	Average	274	176	HORIZONTAL
6	2484.37	61.79	74.00	-12.21	28.74	4.16	28.89	0.00	Peak	274	176	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2441.87	108.80			75.80	4.13	28.87	0.00	Peak	272	167	HORIZONTAL
2	2446.50	98.83			65.83	4.13	28.87	0.00	Average	272	167	HORIZONTAL
3	2483.50	66.29	74.00	-7.71	33.24	4.16	28.89	0.00	Peak	272	167	HORIZONTAL
4	2484.08	53.25	54.00	-0.75	20.20	4.16	28.89	0.00	Average	272	167	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

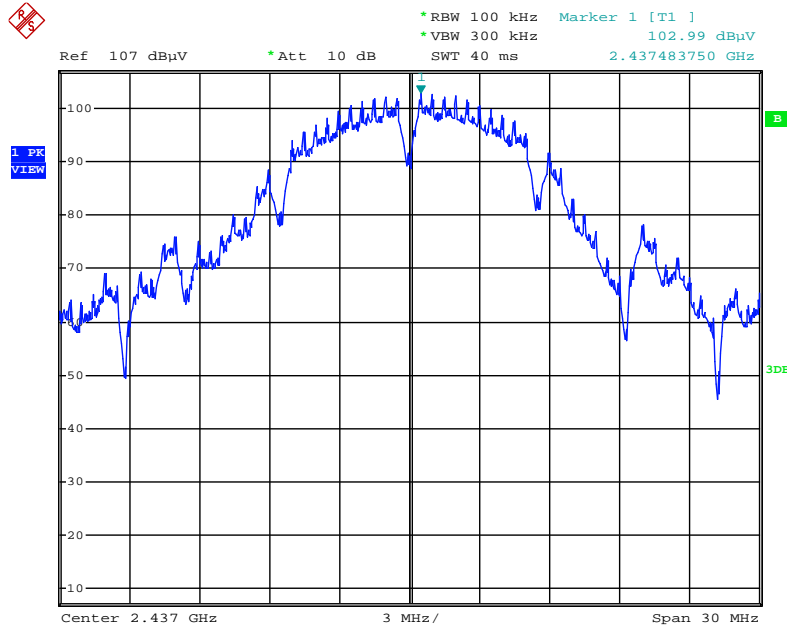


Date: 23.MAY.2015 13:25:58

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

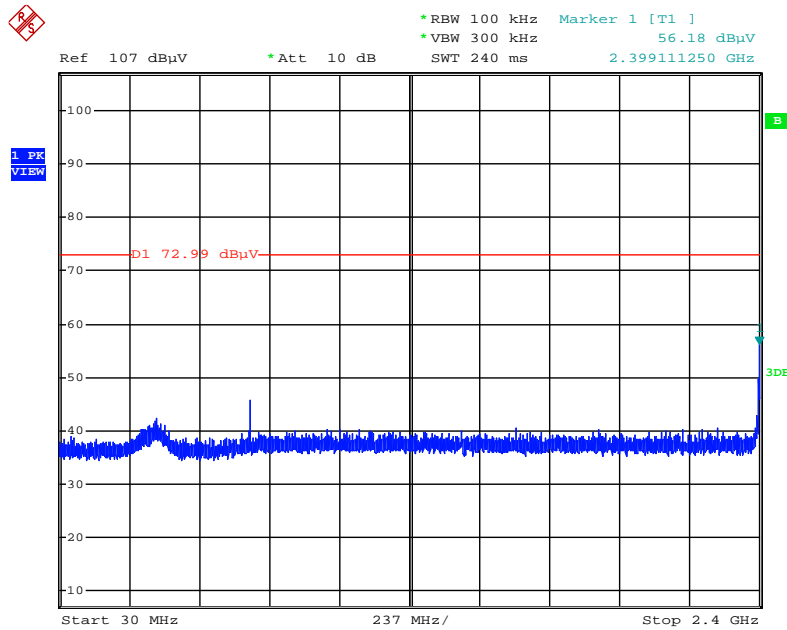


Date: 23.MAY.2015 13:31:49

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

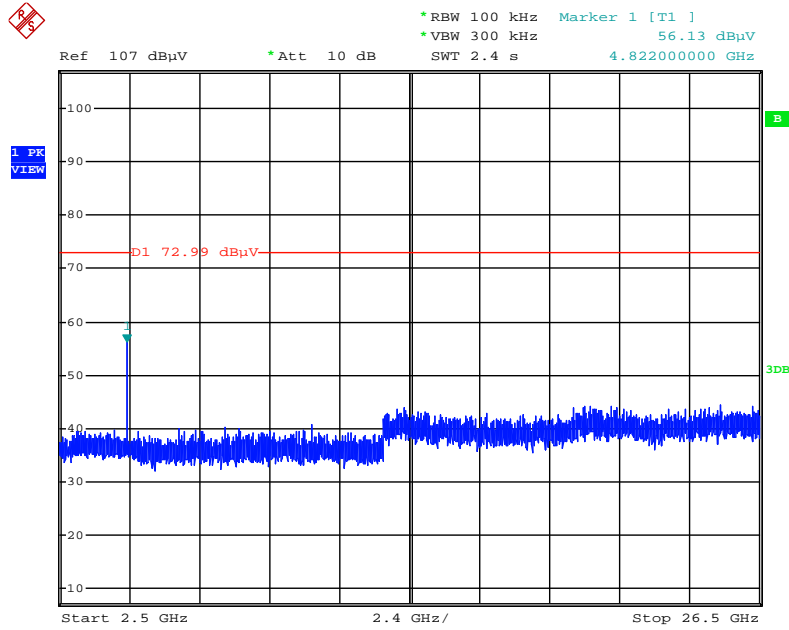


Date: 23.MAY.2015 13:33:02

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

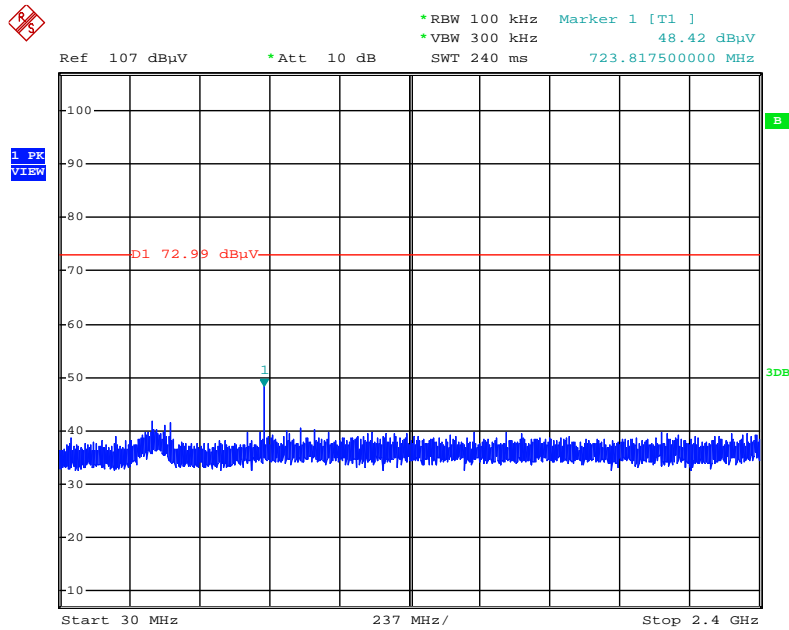


Date: 23.MAY.2015 13:34:43

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

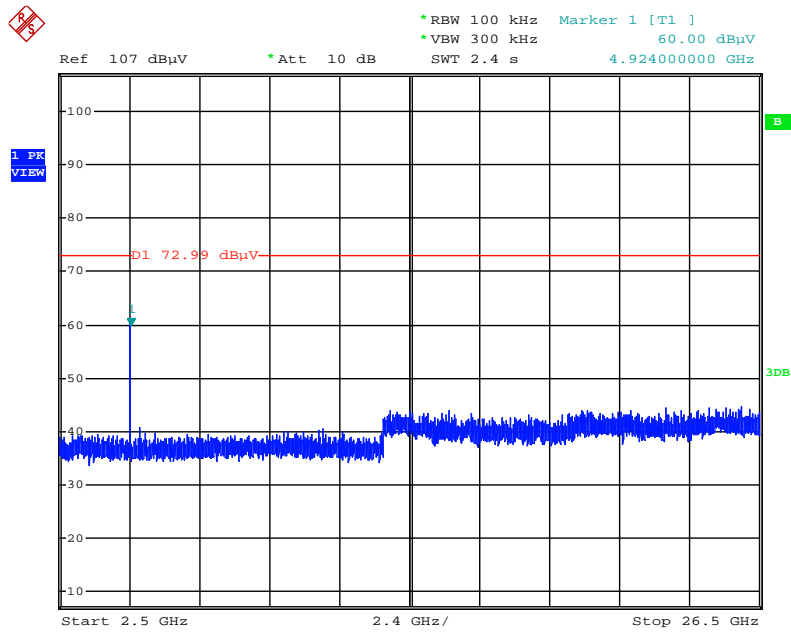


Date: 23.MAY.2015 13:33:56

Plot on Configuration IEEE 802.11g / Reference Level

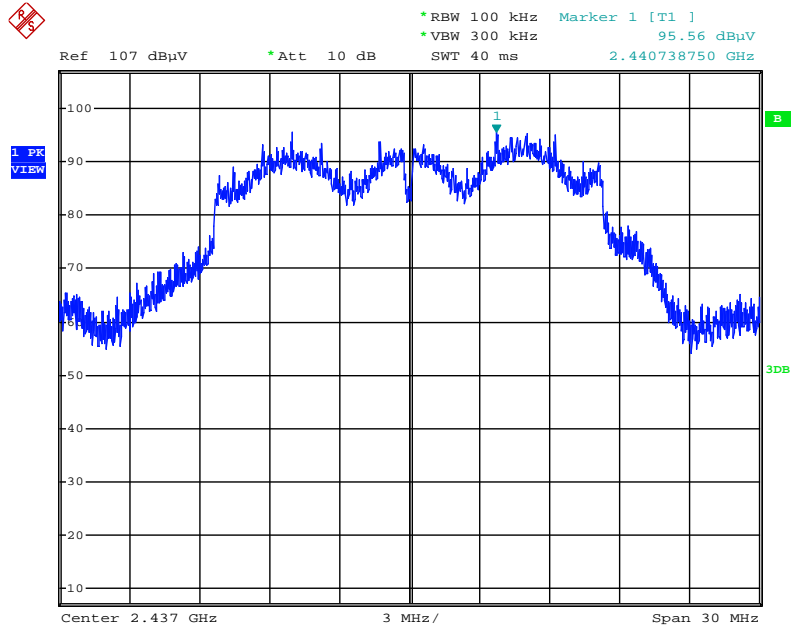

Date: 23.MAY.2015 13:36:25


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

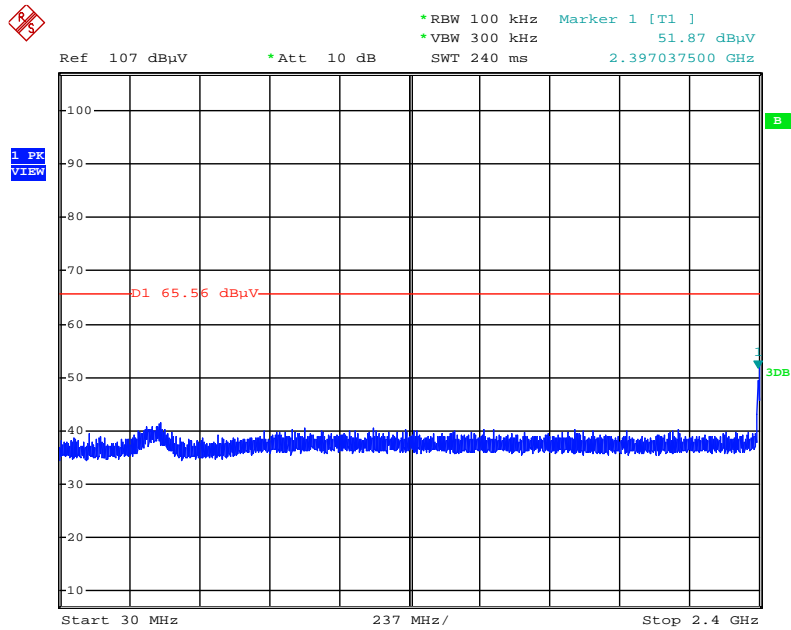

Date: 23.MAY.2015 13:39:16




Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

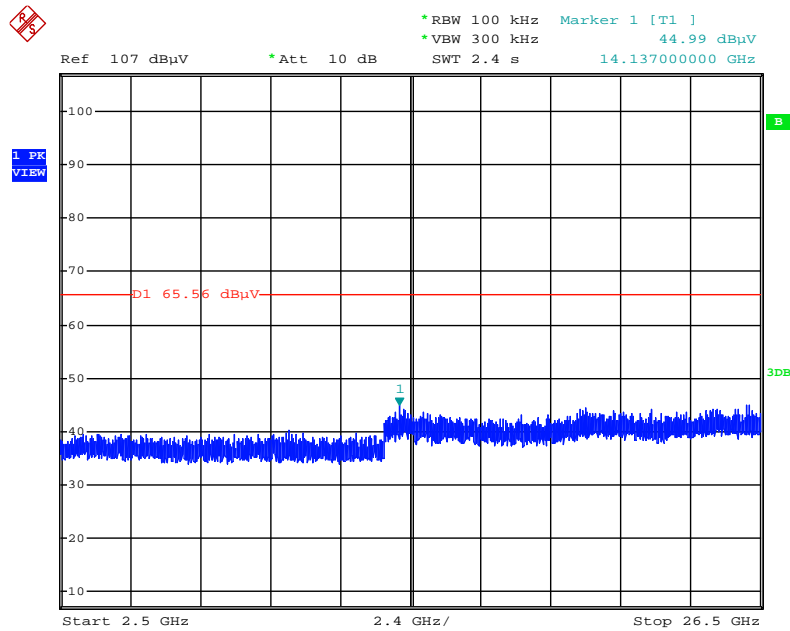

Date: 23.MAY.2015 13:40:15


Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

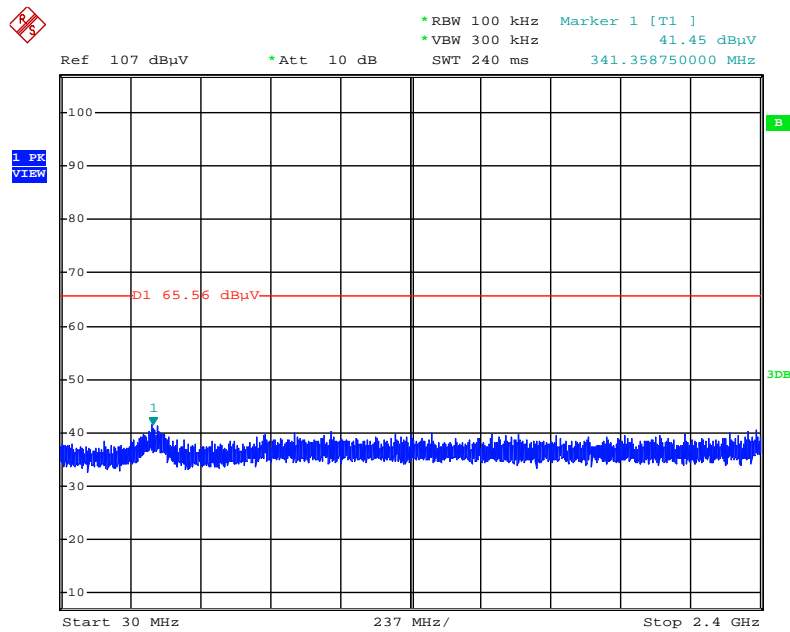

Date: 23.MAY.2015 13:42:36




Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / Reference Level

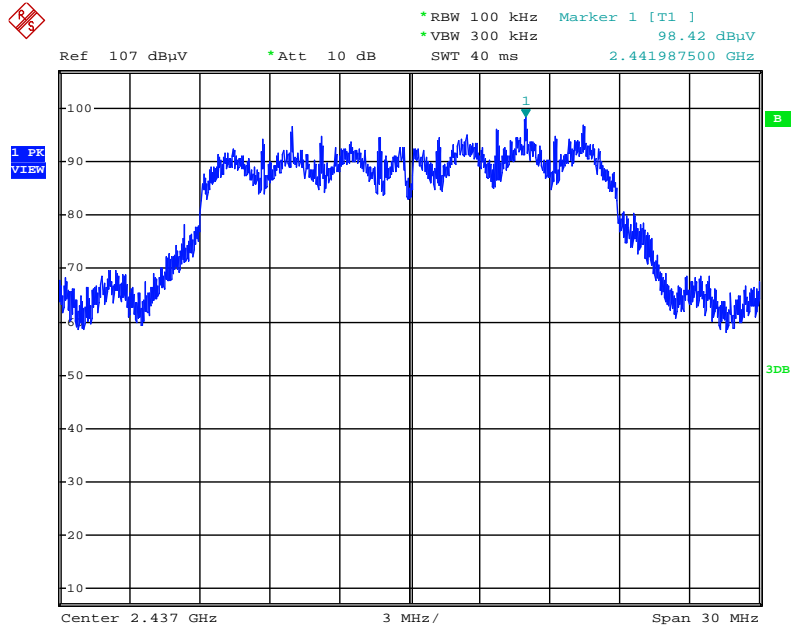


Date: 23.MAY.2015 13:46:24

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

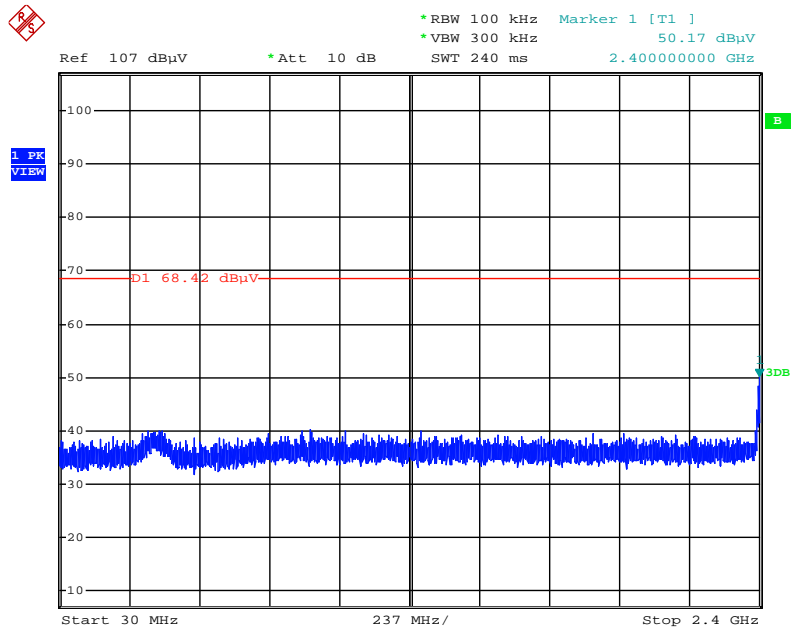


Date: 23.MAY.2015 13:48:19

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

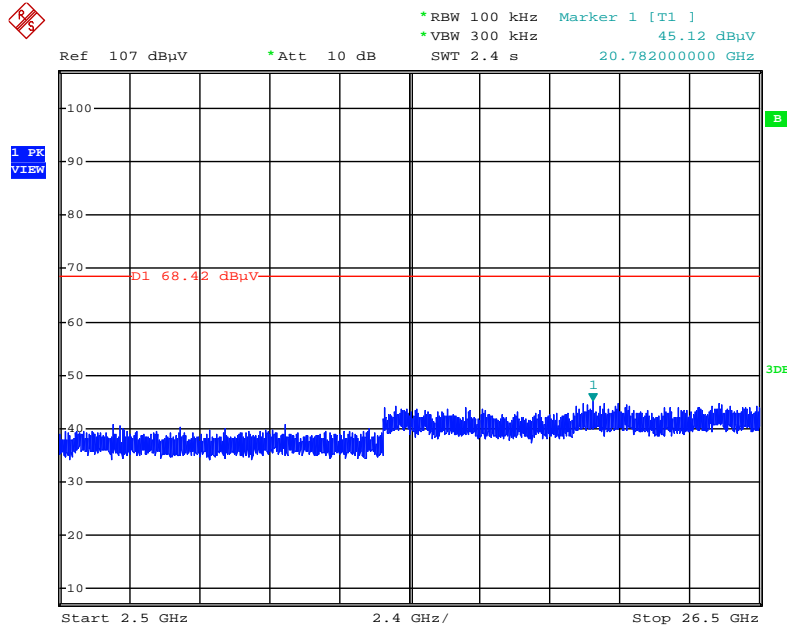


Date: 23.MAY.2015 13:49:28

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

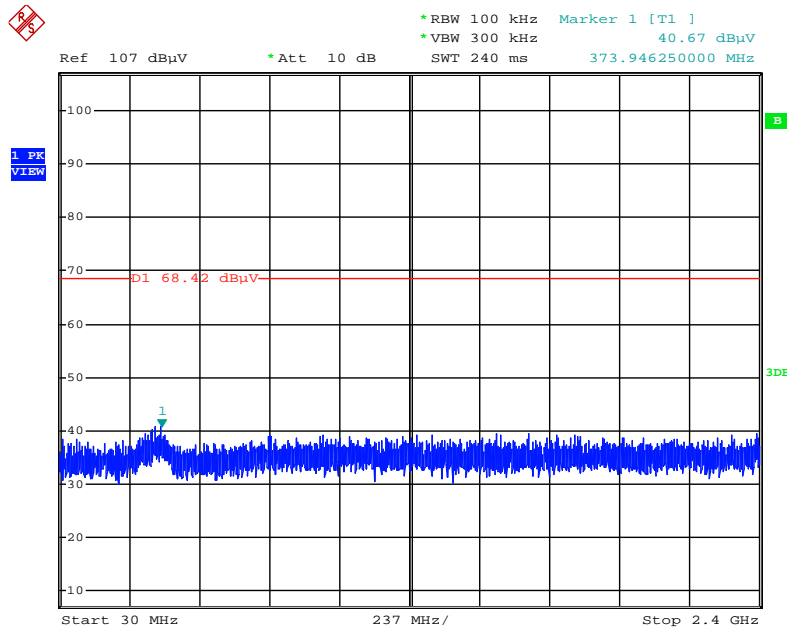


Date: 23.MAY.2015 13:51:15

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

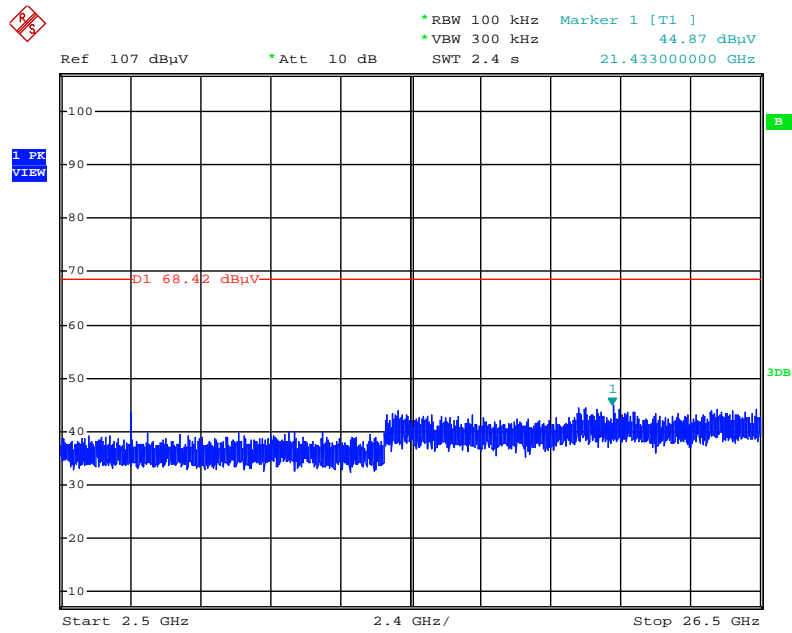


Date: 23.MAY.2015 13:50:49

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / Reference Level

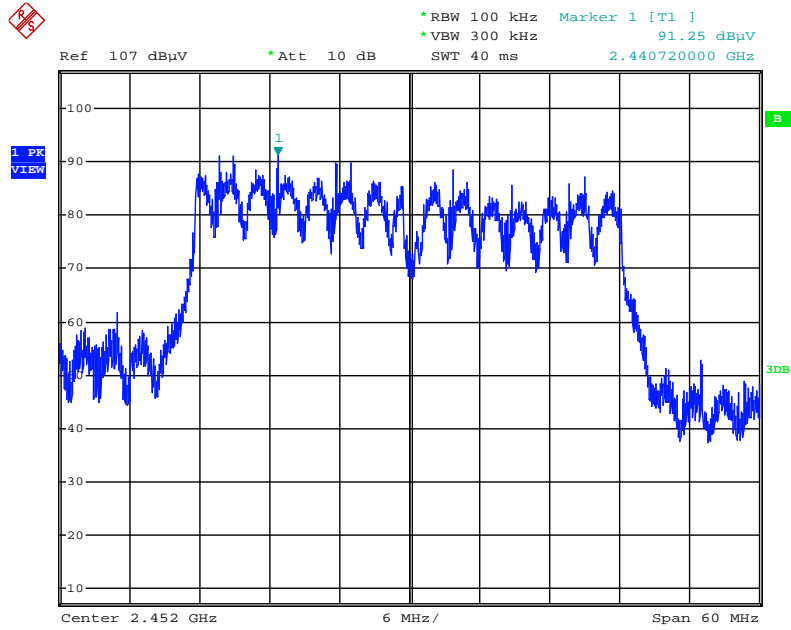


Date: 23.MAY.2015 15:20:44

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

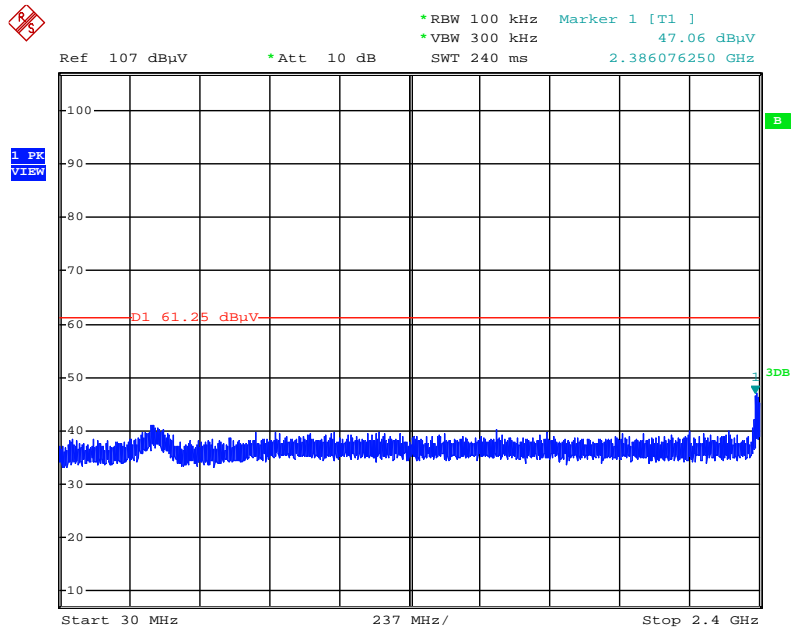


Date: 23.MAY.2015 15:22:26

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

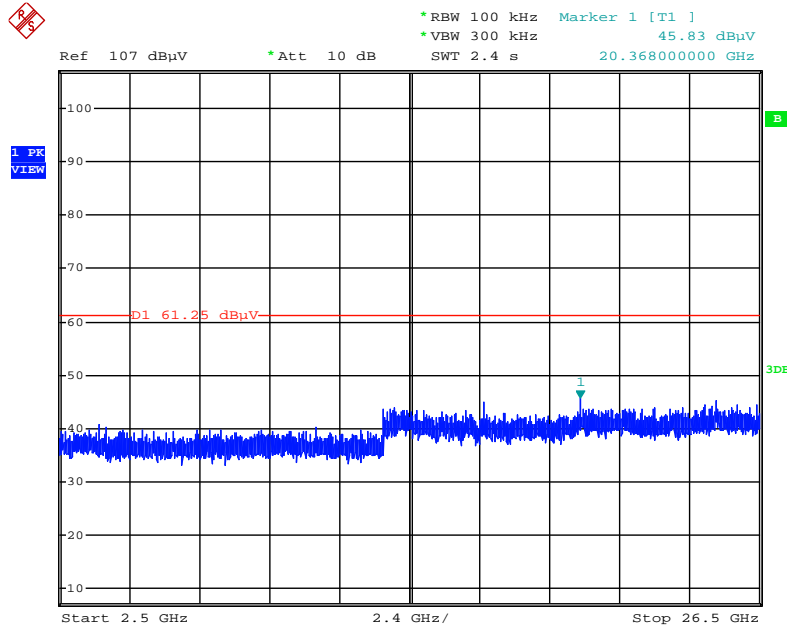

Date: 23.MAY.2015 15:24:07

Plot on Configuration IEEE 802.11ac MCS0-Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

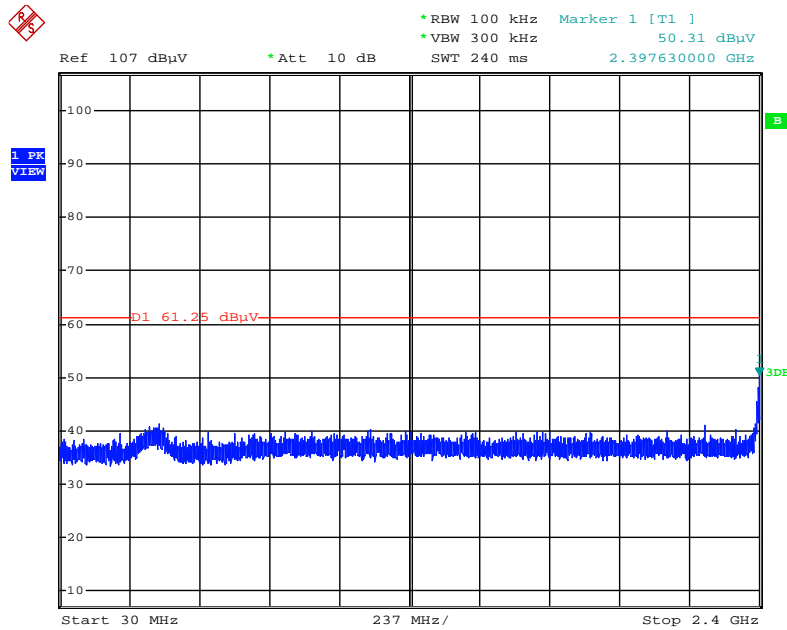

Date: 23.MAY.2015 15:25:56





## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz ~ 30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%