




Appendix D. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	2.4GHz + Bluetooth

Horizontal

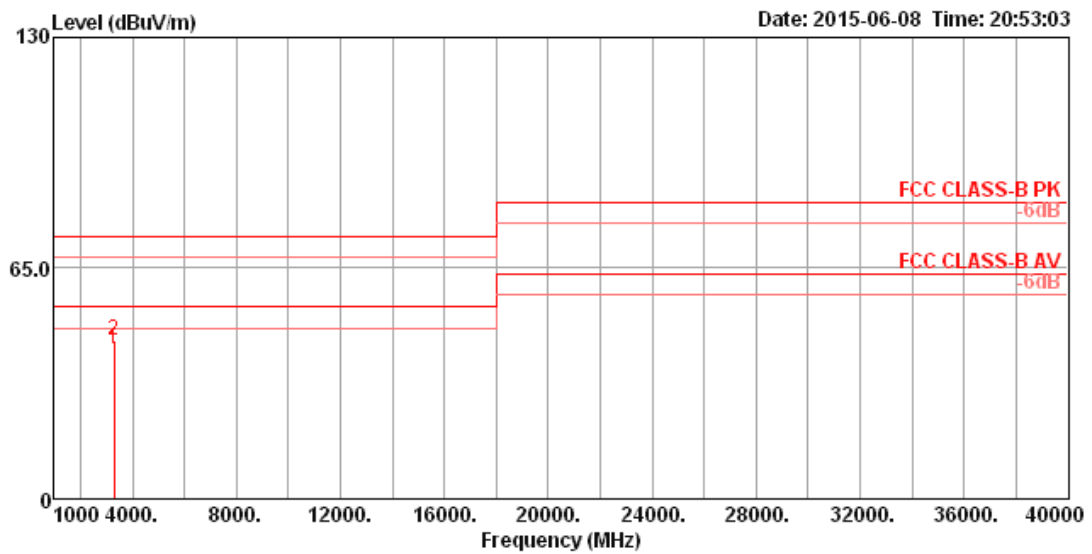

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3298.67	42.29	54.00	-11.71	43.67	4.44	30.18	36.00	100	130	HORIZONTAL Average
2	3301.36	44.63	74.00	-29.37	45.99	4.46	30.18	36.00	100	130	HORIZONTAL Peak


Vertical

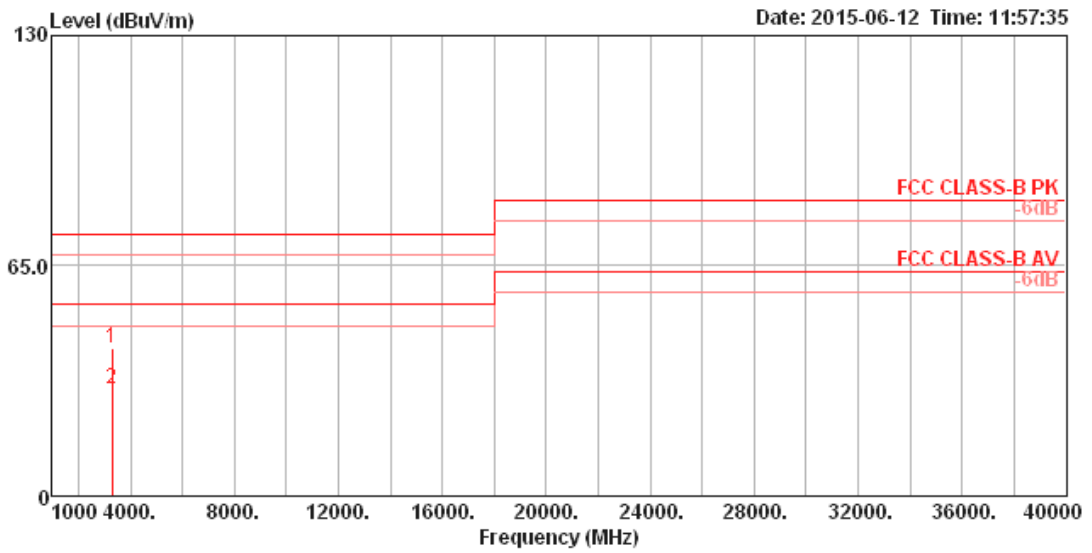

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3298.53	41.85	74.00	-32.15	43.23	4.44	30.18	36.00	100	177 VERTICAL	Peak
2	3298.69	30.00	54.00	-24.00	31.38	4.44	30.18	36.00	100	177 VERTICAL	Average


Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	5GHz + Bluetooth

Horizontal

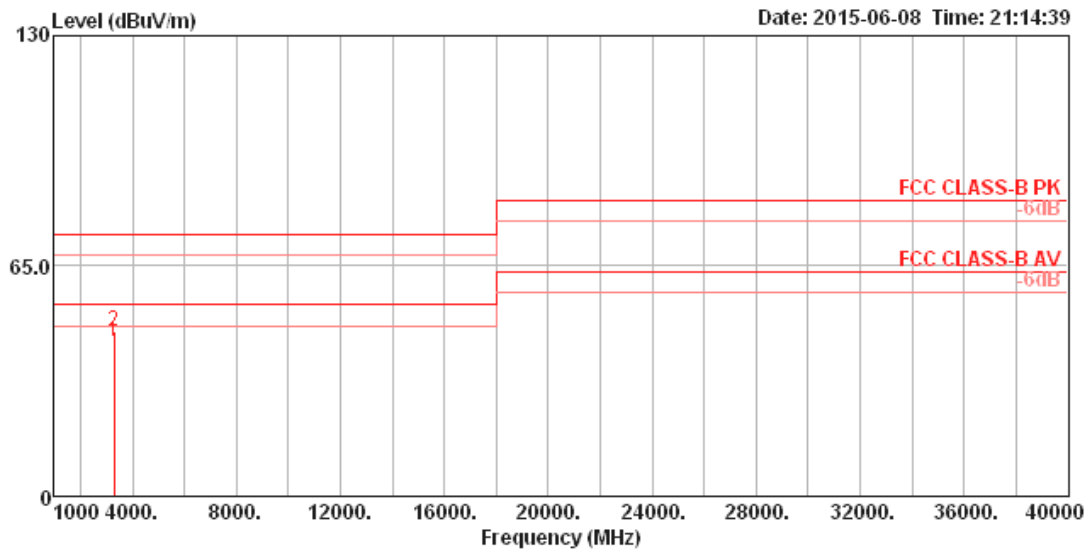

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3296.01	43.52	54.00	-10.48	44.89	4.44	30.18	35.99	102	128	HORIZONTAL Average
2	3297.39	46.59	74.00	-27.41	47.96	4.44	30.18	35.99	102	128	HORIZONTAL Peak

Vertical

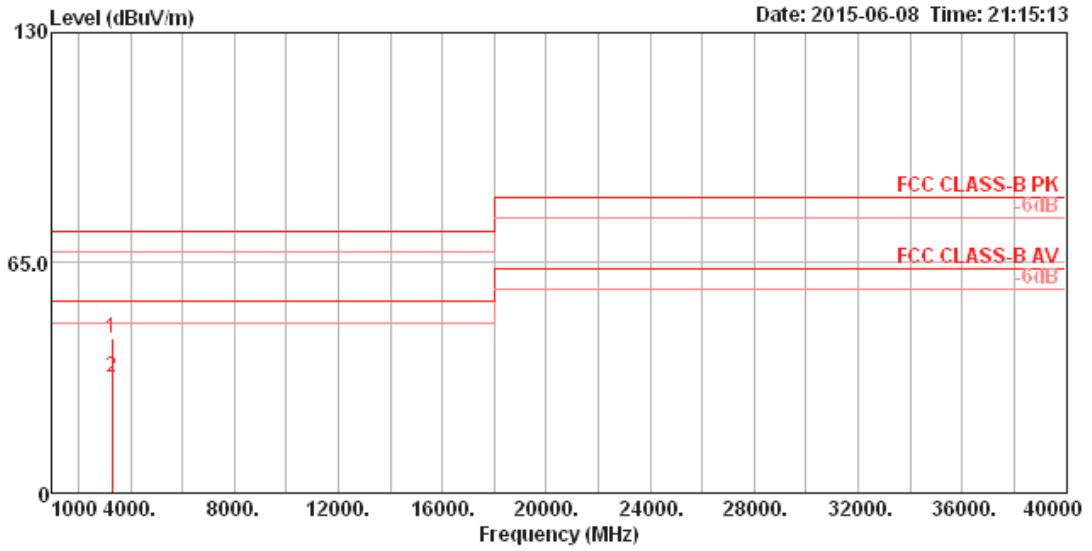

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3294.80	43.82	74.00	-30.18	45.19	4.44	30.18	35.99	400	167	VERTICAL	Peak
2	3297.37	32.43	54.00	-21.57	33.80	4.44	30.18	35.99	400	167	VERTICAL	Average