

Test Laboratory: Compliance Certification Services

File Name: 1_Left Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Low/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.71 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.697 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.409 mW/g

Reference Value = 3.71 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.667 mW/g

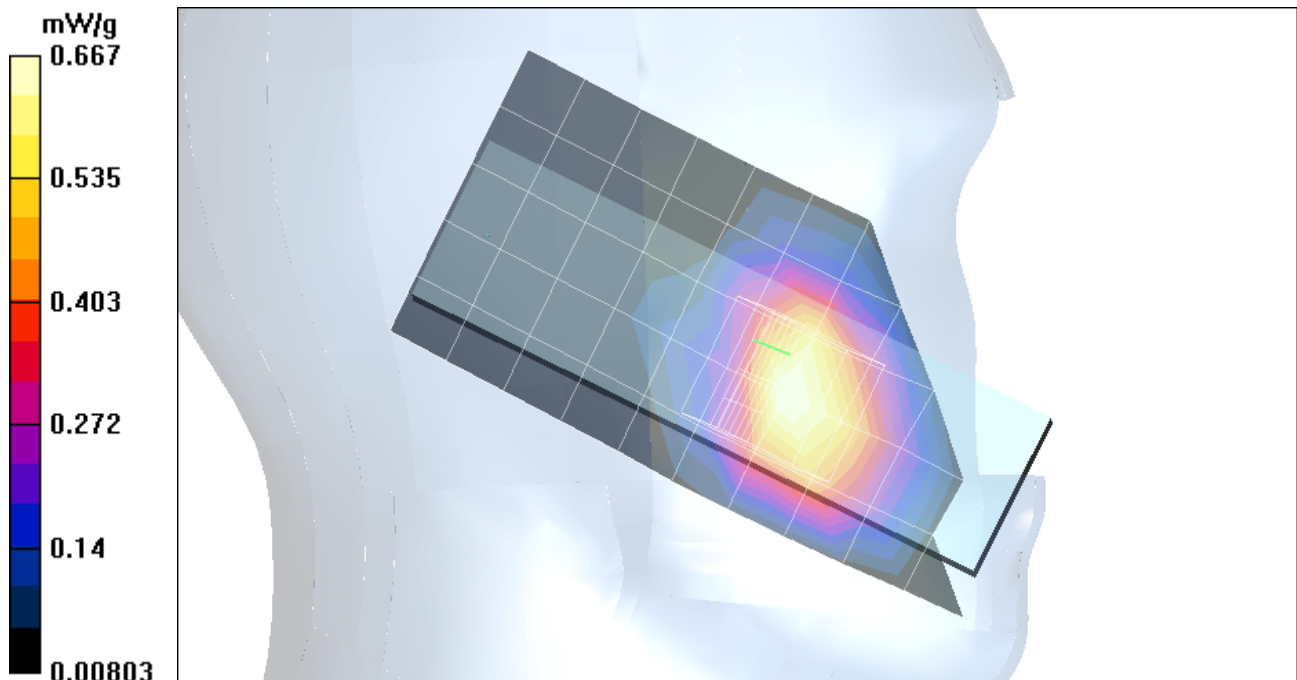

Test Laboratory: Compliance Certification Services

File Name: 1_Left Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A
Program: Left-Hand Side

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Low/Z Scan (1x1x53): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 3.71 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.287 mW/g

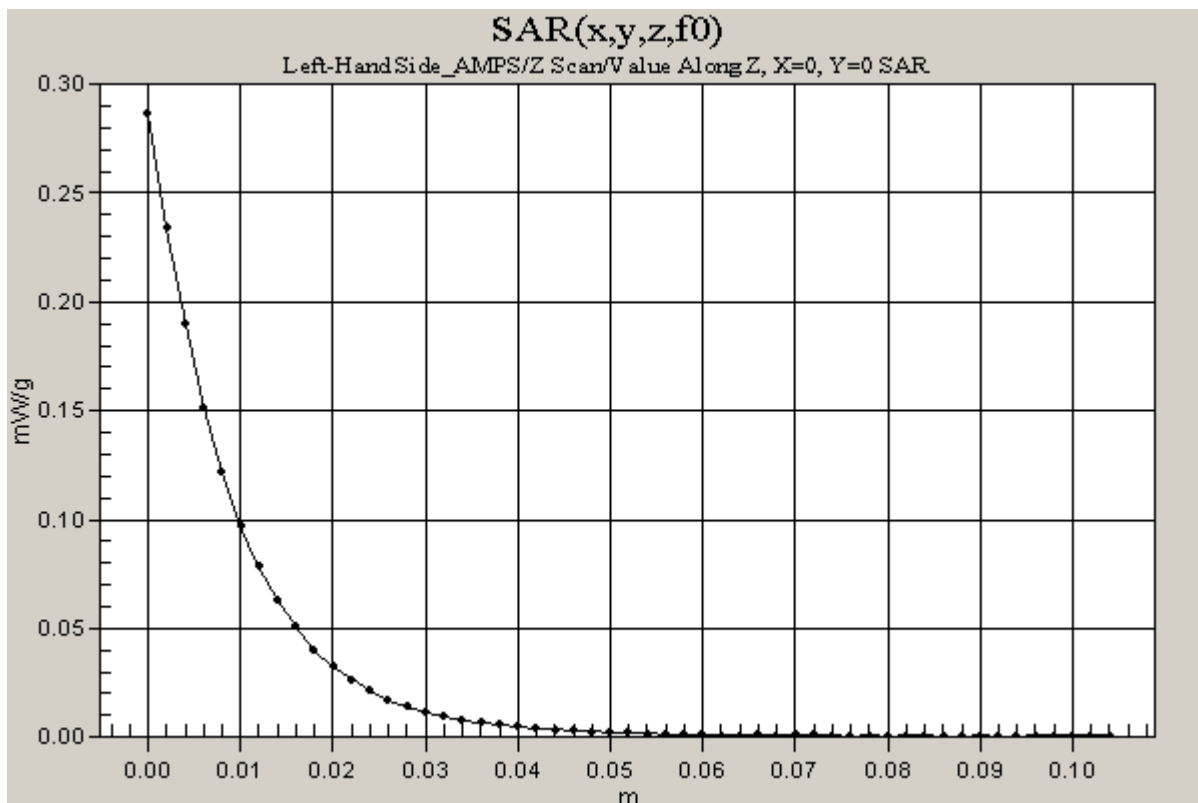

Test Laboratory: Compliance Certification Services

File Name: 1_Left Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Middle/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.35 V/m

Power Drift = -0.13 dB

Maximum value of SAR = 0.553 mW/g

Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.75 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.307 mW/g

Reference Value = 3.35 V/m

Power Drift = -0.13 dB

Maximum value of SAR = 0.527 mW/g

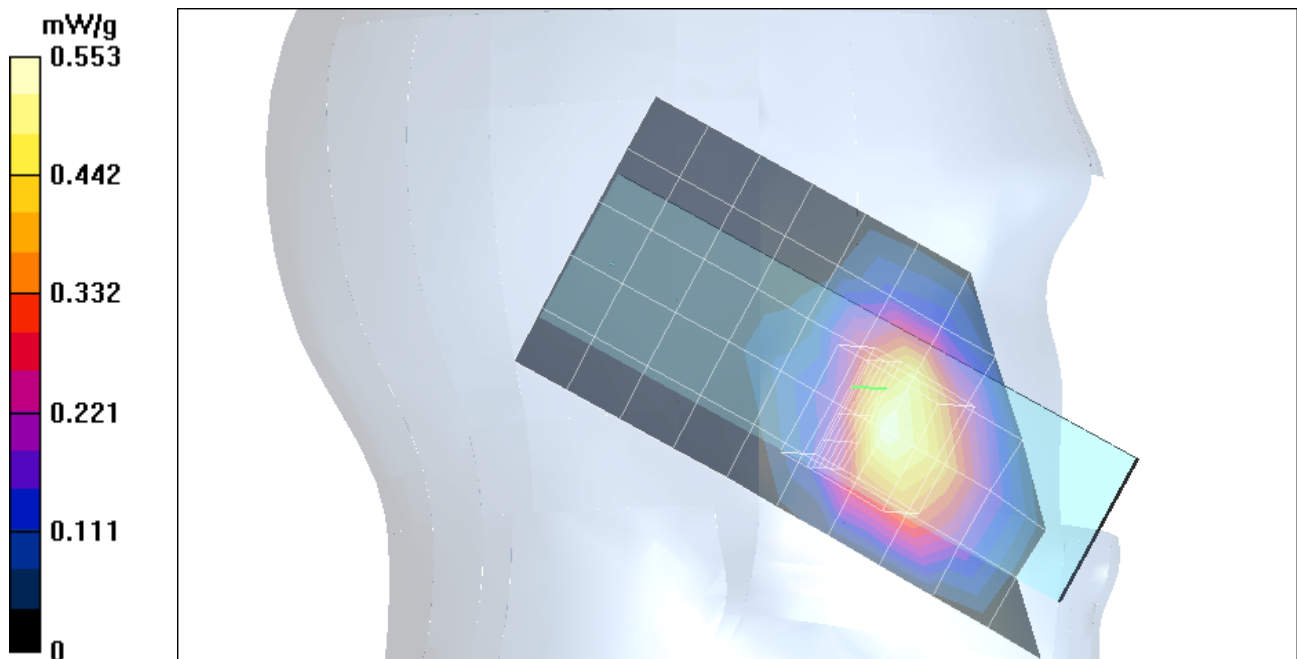

Test Laboratory: Compliance Certification Services

File Name: 1_Left Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - High/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.06 V/m

Power Drift = -0.15 dB

Maximum value of SAR = 0.453 mW/g

Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.239 mW/g

Reference Value = 3.06 V/m

Power Drift = -0.15 dB

Maximum value of SAR = 0.435 mW/g

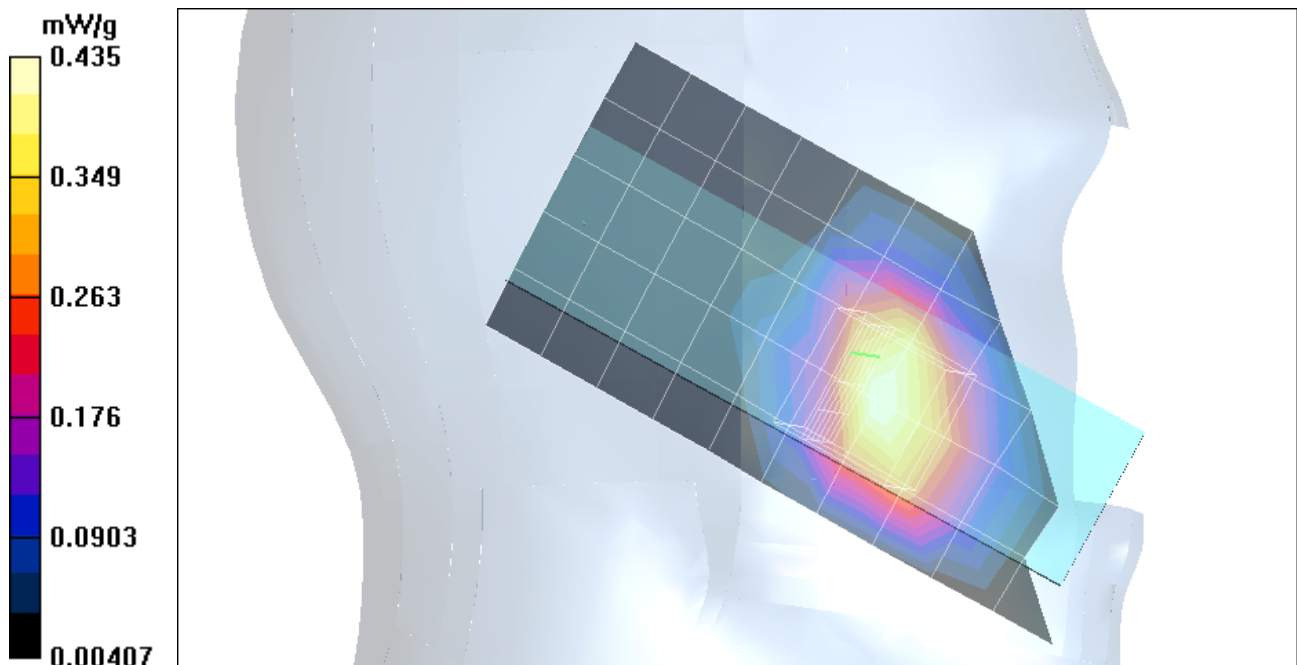

Test Laboratory: Compliance Certification Services

File Name: 1_Left Tilt.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.21 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.0807 mW/g

Tilt position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.0796 mW/g; SAR(10 g) = 0.0533 mW/g

Reference Value = 4.21 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.0855 mW/g

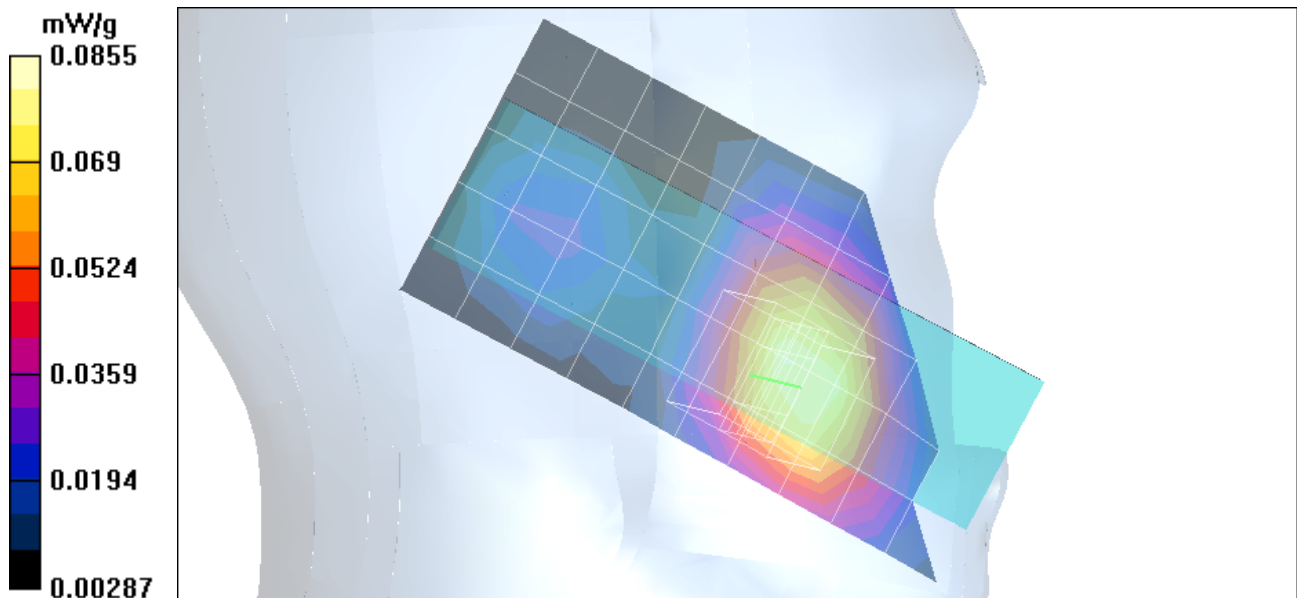

Test Laboratory: Compliance Certification Services

File Name: 1_Left Tilt.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Z Scan (1x1x53): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 4.21 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.0465 mW/g

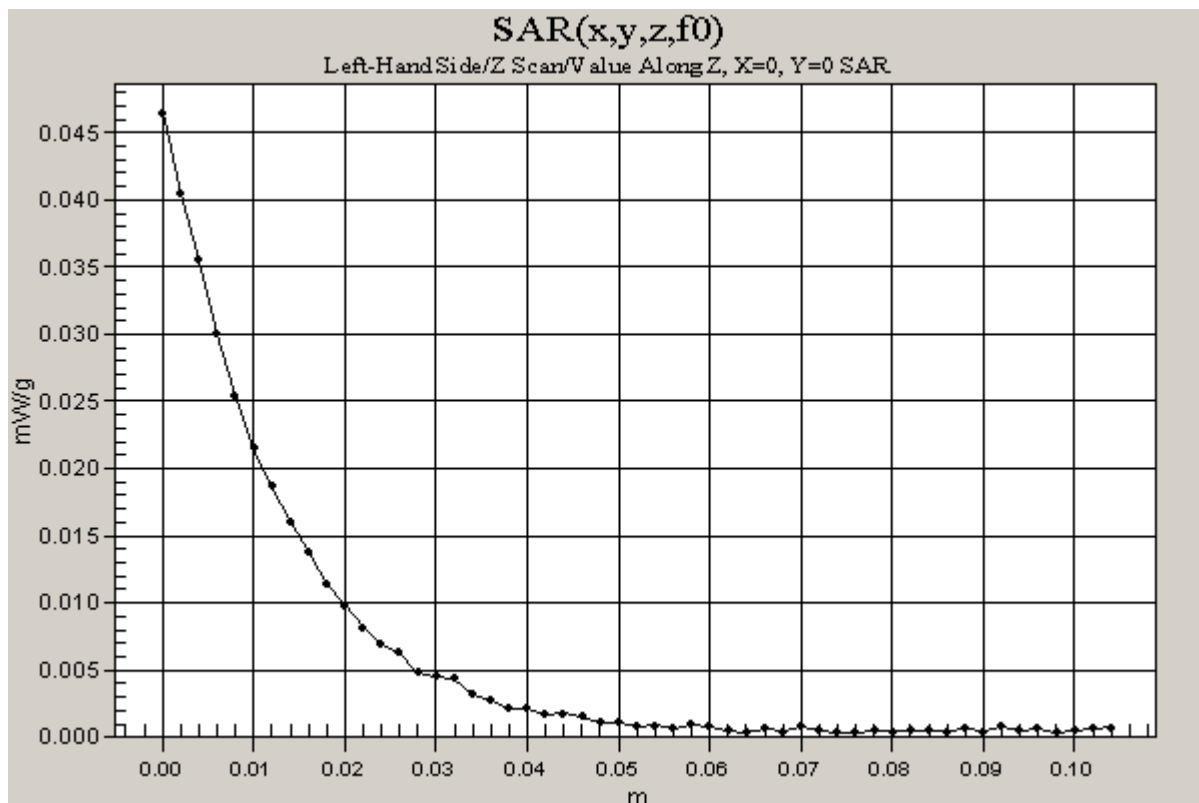

Test Laboratory: Compliance Certification Services

File Name: 1_Left Tilt.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - High/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.89 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.046 mW/g

Tilt position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.0615 W/kg

SAR(1 g) = 0.0431 mW/g; SAR(10 g) = 0.0281 mW/g

Reference Value = 2.89 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.0464 mW/g

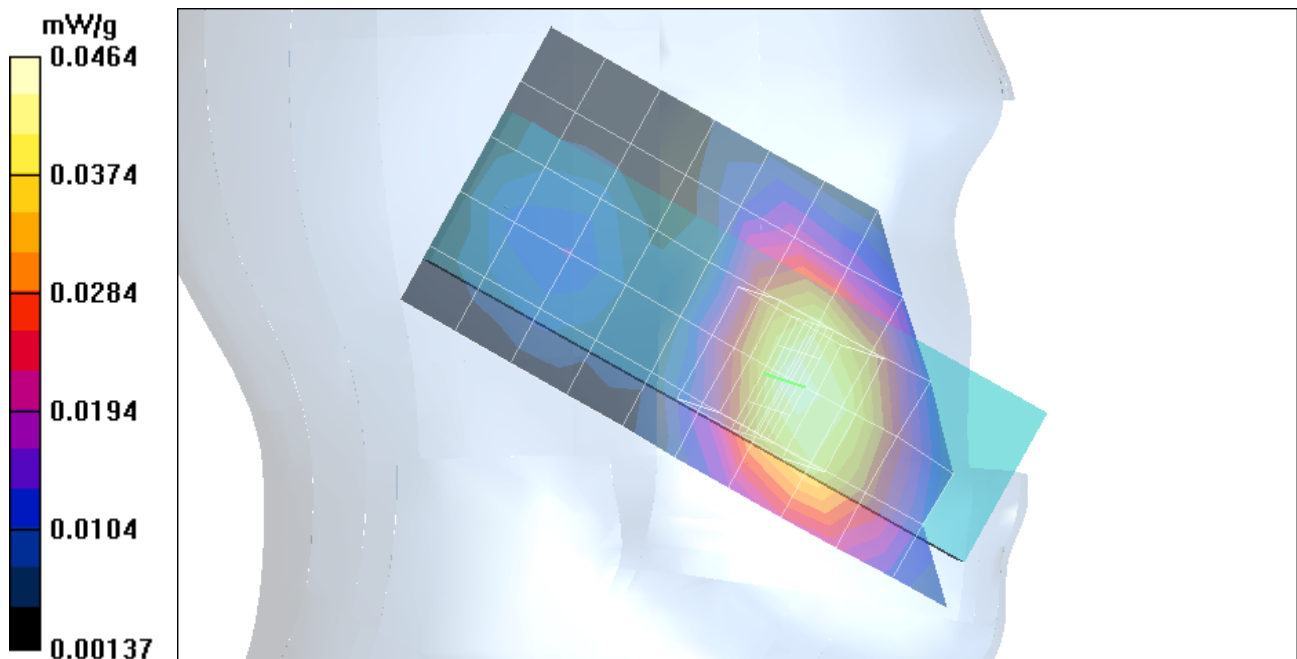

Test Laboratory: Compliance Certification Services

File Name: 1_Left Tilt.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Left-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Middle/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.43 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0594 mW/g

Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.0743 W/kg

SAR(1 g) = 0.0545 mW/g; SAR(10 g) = 0.036 mW/g

Reference Value = 3.43 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.058 mW/g

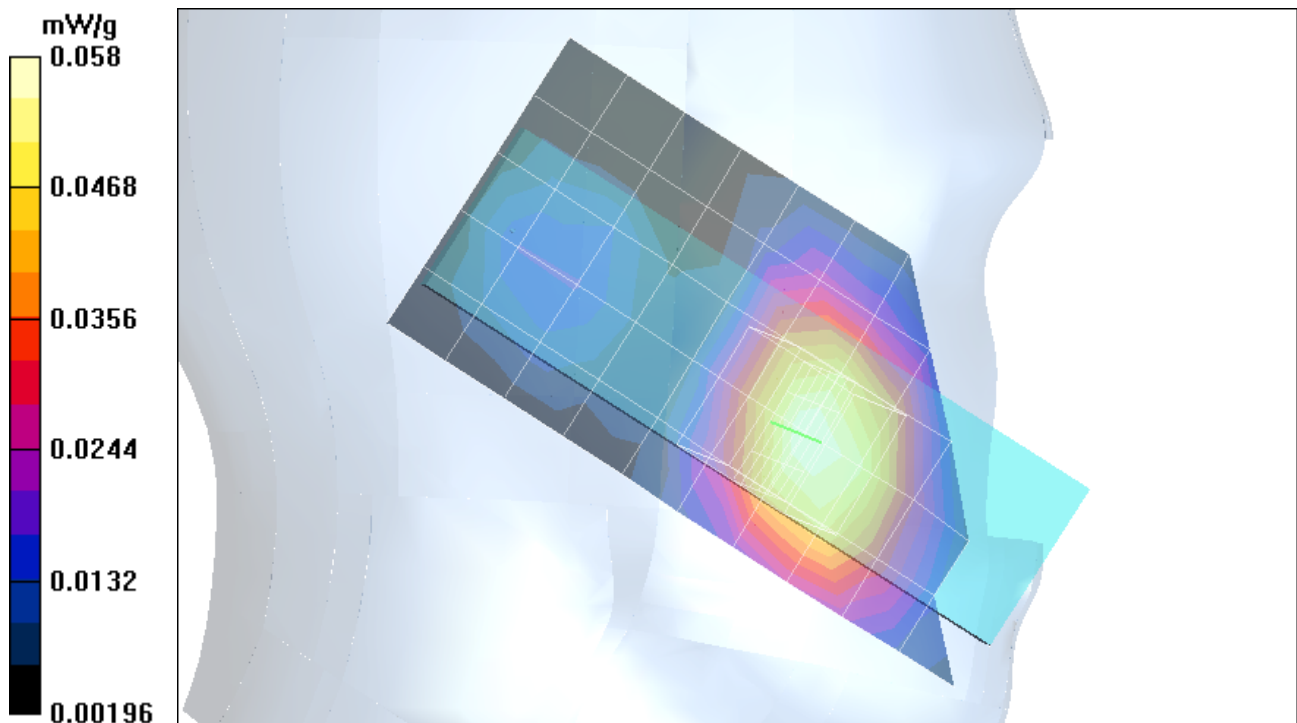

Test Laboratory: Compliance Certification Services

File Name: 3_R-Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Right-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Low/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.17 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.589 mW/g

Touch position - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.369 mW/g

Reference Value = 4.17 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.614 mW/g

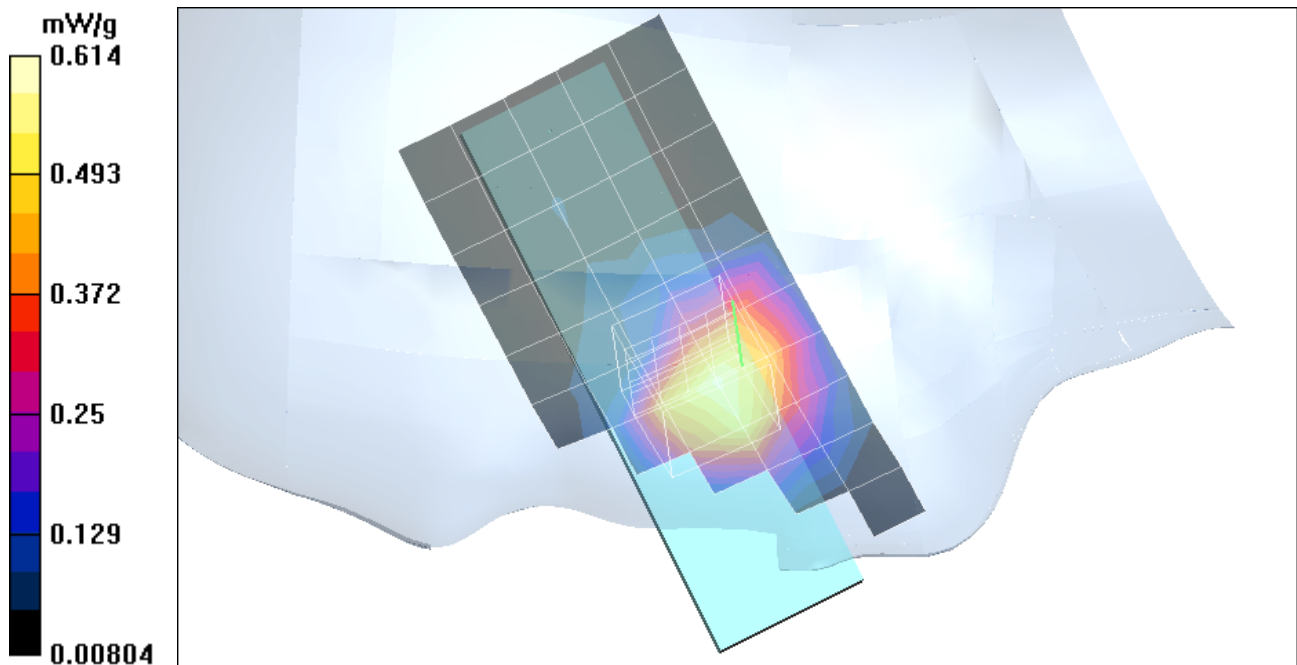

Test Laboratory: Compliance Certification Services

File Name: 3_R-Touch.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A
Program: Right-Hand Side

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4461$ mho/m, $\epsilon_r = 40.5257$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Low/Z Scan (1x1x53): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 4.17 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.279 mW/g

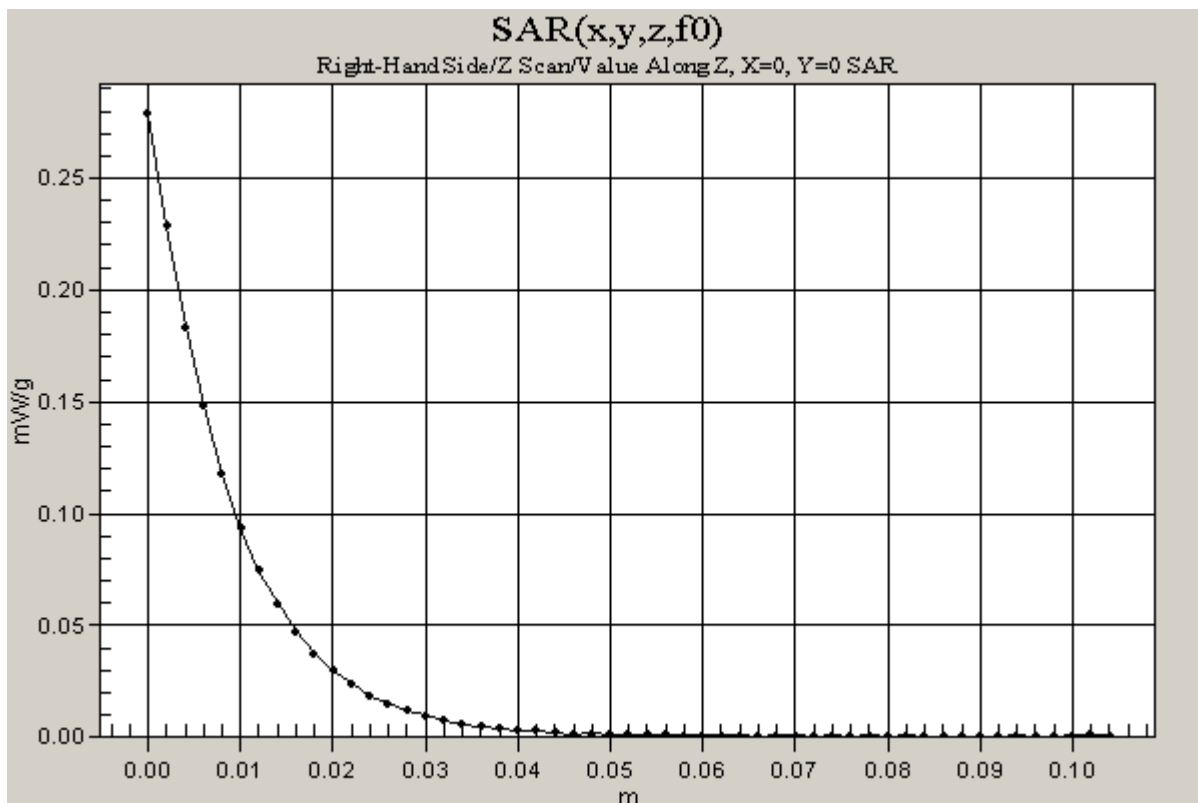

Test Laboratory: Compliance Certification Services

File Name: 3_R-Touch_071503.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Right-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4442$ mho/m, $\epsilon_r = 40.0085$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - Middle/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.59 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.528 mW/g

Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.309 mW/g

Reference Value = 3.59 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.536 mW/g

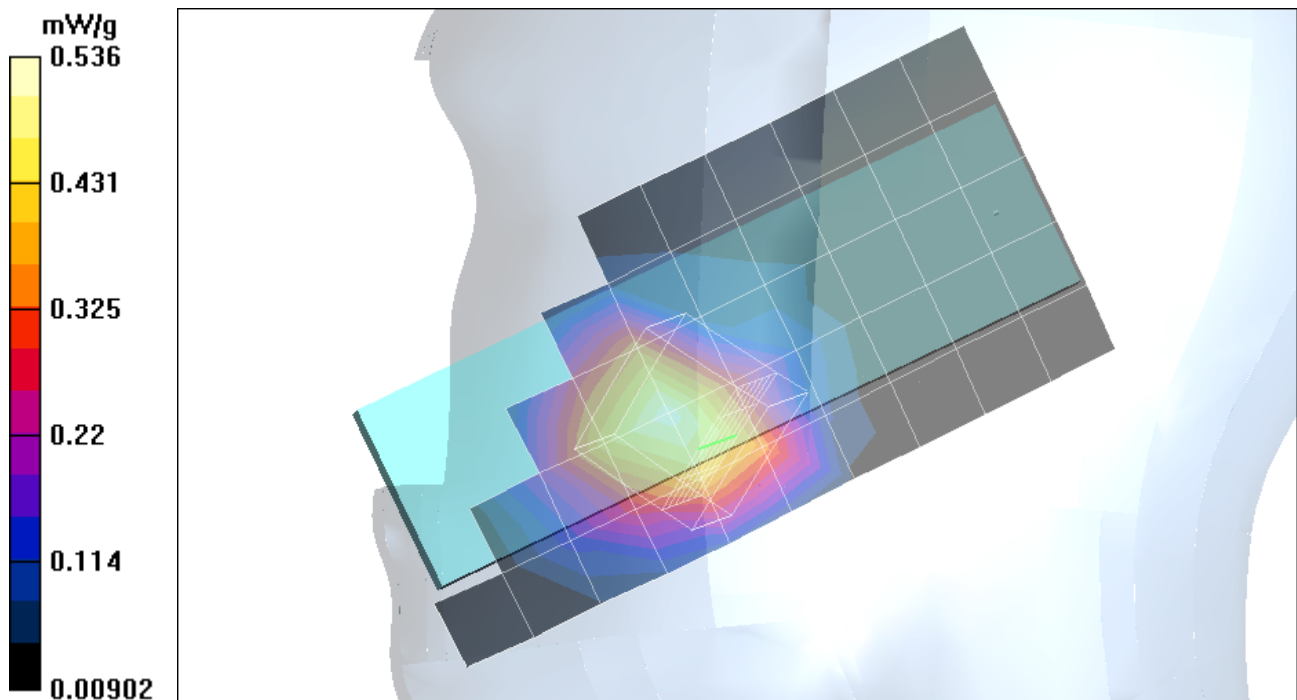

Test Laboratory: Compliance Certification Services

File Name: 3_R-Touch_071503.da4

DUT: Accetio, Inc; Type: AGM1100; Serial: N/A

Program: Right-Hand Side

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.4442$ mho/m, $\epsilon_r = 40.0085$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Touch position - High/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.43 V/m

Power Drift = -0.17 dB

Maximum value of SAR = 0.415 mW/g

Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.23 mW/g

Reference Value = 3.43 V/m

Power Drift = -0.17 dB

Maximum value of SAR = 0.395 mW/g

